RADIO TEST REPORT

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Applicant	:	No.21, Longliang Road, Xialiang Village, Longgui Street, Baiyun District, Guangzhou, Guangdong, P.R. China
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Manufacturer	:	No.21, Longliang Road, Xialiang Village, Longgui Street, Baiyun District, Guangzhou, Guangdong, P.R. China
Equipment under Test	:	True Wireless Bluetooth Headphone Amplifier
Model No.	:	F5151U-E, F2501U-E, F2502U-E, F2503U-E, F2504U-E, F2505U-E, F2506U-E, F2507U-E, F2508U-E, F2509U-E, F2500U-E
FCC ID	:	R56-FC2003
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10-2020+Cor.1-2023
Report No.	:	DDT-RE25103113-2E01
Issue Date	:	2026/06/26
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1. Summary of Test Results 7
2. General Test Information 8
2.1. Description of EUT 8
2.2. Accessories of EUT 9
2.3. Block diagram of EUT configuration for test 9
2.4. Decision of final test mode 9
2.5. Deviations of test standard 10
2.6. Test environment conditions 10
2.7. Test laboratory 10
2.8. Measurement uncertainty 11
3. Equipment Used During Conductive Test 12
4. 20 dB Bandwidth 13
4.1. Block diagram of test setup 13
4.2. Limits 13
4.3. Test procedure 13
4.4. Test result 14
4.5. Test graphs 15
5. 99% Bandwidth 21
5.1. Block diagram of test setup 21
5.2. Limits 21
5.3. Test procedure 21
5.4. Test result 22
5.5. Test graphs 23
6. Maximum Peak Output Power 29
6.1. Block diagram of test setup 29
6.2. Limits 29
6.3. Test procedure 29
6.4. Test result 30
6.5. Test graphs 31
7. Carrier Frequency Separation 37
7.1. Block diagram of test setup 37
7.2. Limits 37
7.3. Test procedure 37
7.4. Test result 38
7.5. Test graphs 39
8. Dwell Time 41

8.1. Block diagram of test setup 41
8.2. Limits 41
8.3. Test procedure 41
8.4. Test result 42
8.5. Test graphs 43
9. Number of Hopping Channel 55
9.1. Block diagram of test setup 55
9.2. Limits 55
9.3. Test procedure 55
9.4. Test result 56
9.5. Test graphs 57
10. Band Edge Compliance (Conducted Method) 59
10.1. Block diagram of test setup 59
10.2. Limit 59
10.3. Test procedure 59
10.4. Test result 60
10.5. Test graphs 61
11. RF Conducted Spurious Emissions 69
11.1. Block diagram of test setup 69
11.2. Limits 69
11.3. Test procedure 69
11.4. Test result 70
11.5. Test graphs 71
12. Duty cycle 89
12.1. Block diagram of test setup 89
12.2. Limit 89
12.3. Test procedure 89
12.4. Test result 90
12.5. Test graphs 91
13. Antenna Requirements 97
13.1. Limit 97
13.2. Result 97
14. Radiated Emission 98
14.1. Test equipment 98
14.2. Block diagram of test setup 99
14.3. Limits 100
14.4. Assistant equipment used for test 101
14.5. Test procedure 101

14.6. Test result....103
14.7. Test data....104
15. Band Edge Compliance....120
15.1. Test equipment....120
15.2. Block diagram of test setup....121
15.3. Limits....121
15.4. Assistant equipment used for test....121
15.5. Test procedure....121
15.6. Test result....121
15.7. Test data....122
16. Power Line Conducted Emissions....146
16.1. Test equipment....146
16.2. Block diagram of test setup....146
16.3. Limits....146
16.4. Assistant equipment used for test....146
16.5. Test procedure....146
16.6. Test result....147
16.7. Test data....148
17. Test Setup Photograph....150
18. Photos of the EUT....152

Test Report Declare

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Applicant	:	No.21, Longliang Road, Xialiang Village, Longgui Street, Baiyun District, Guangzhou, Guangdong, P.R. China
Equipment under Test	:	True Wireless Bluetooth Headphone Amplifier
Model No.	:	F5151U-E, F2501U-E, F2502U-E, F2503U-E, F2504U-E, F2505U-E, F2506U-E, F2507U-E, F2508U-E, F2509U-E, F2500U-E
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Manufacturer	:	No.21, Longliang Road, Xialiang Village, Longgui Street, Baiyun District, Guangzhou, Guangdong, P.R. China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10-2020+Cor.1-2023

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25103113-2E01		
Date of Receipt:	2026/01/04	**Date of Test:**	2026/01/04 - 2026/02/13

Created: Chen Ziqin	Reviewed: Bobo Chen	Approved: Ella Gong
2026/02/12	2026/06/26	2026/06/26

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/06/26	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	47 CFR Part 15 15.247(b)(1)	/	Pass
2	20 dB Bandwidth	47 CFR Part 15 15.247(a)(1)	/	Pass
3	99% Bandwidth	/	/	Pass
4	Carrier Frequency Separation	47 CFR Part 15 15.247(a)(1)	/	Pass
5	Number of Hopping Channel	47 CFR Part 15 15.247(a)(1)(iii)	/	Pass
6	Dwell Time	47 CFR Part 15 15.247(a)(1)(iii)	/	Pass
7	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d)	/	Pass
8	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d)	/	Pass
9	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d)	/	Pass
10	Power Line Conducted Emissions	47 CFR Part 15 15.207(a)	/	Pass
11	Antenna Requirement	47 CFR Part 15 15.203	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	:	True Wireless Bluetooth Headphone Amplifier
Model Number	:	F5151U-E, F2501U-E, F2502U-E, F2503U-E, F2504U-E, F2505U-E, F2506U-E, F2507U-E, F2508U-E, F2509U-E, F2500U-E
Difference of model number	:	Above models are identical in schematic and structure, only the model number are different, therefore the test performed on the model F5151U-E
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	DC 5V from external charging case or DC 3.7V built-in battery
Antenna Type	:	FPC Antenna
Max Antenna Gain(dBi)	:	L: -2.73 R: -5.43

Radio Specification	:	Bluetooth BR/EDR
Operation Frequency	:	2402 MHz to 2480 MHz
Modulation	:	GFSK, π/4-DQPSK, 8DPSK

Bluetooth BR/EDR Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475

20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	/	
26	2428	53	2455	/	

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

"☒" means to be chosen or applicable; "□" means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:
Test software: Blue Test 3.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Tested mode	Tx Power Setting	Channel	Frequency (MHz)
GFSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
π/4-DQPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480

π/4-DQPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
8DPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
Note 1: According exploratory test, EUT will have maximum output power in those data rate, worst-case data rates were: GFSK mode: DH5, π/4-DQPSK mode: 2DH5, 8DPSK mode: 3DH5 Note 2: Ant1 is for the left ear, and Ant2 is for the right ear			

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15℃ to +35 ℃
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, http://www.dgddt.com, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.9%
Peak Output Power (Conducted) (Spectrum analyzer)	0.98 dB
Peak Output Power (Conducted) (Power Sensor)	1.18 dB
Power Spectral Density (Base EIRP)	1.51 dB
Power Spectral Density (Spectrum analyzer)	0.98 dB
Frequencies Stability	1.9 kHz
Conducted spurious emissions	1.21 dB (9 kHz ≤ f < 7 GHz);
	3.31 dB (7 GHz ≤ f < 40 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	5.5×10^{-8}
Time	0.11%
Temperature	0.3 ℃
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.28 dB (Antenna Polarize: V)
	4.14 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.22 dB (1 - 6 GHz)
	4.52 dB (6 GHz - 18 GHz)
	4.58 dB (18 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2026/03/28
Wideband Radio Communication Tester	R&S	CMW500	168801	2026/03/28
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2026/03/28
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2026/08/10
RF Control Unit	Tonscend	JS0806-2	21I8060485	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

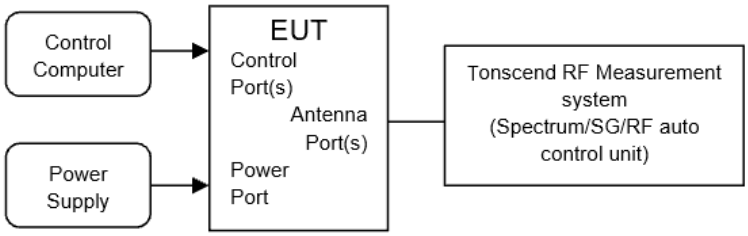

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

(1) The test according to ANSI C63.10 clause 6.9.2.
(2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
(3) Set the EUT as maximum power setting and enable the EUT transmit continuously
(4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

(5) Measure and record the results in the report.

4.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement system 4#
Ambient Condition:	24.1-26.5℃,37.1-45.2%RH	Test Date:	2026.01.07-2026.01.16
Test Power Supply:	Battery	Sample Number:	S25103113-004

Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Ant1	2402	0.96
	Ant2	2402	0.98
	Ant1	2441	0.95
	Ant2	2441	0.96
	Ant1	2480	0.96
	Ant2	2480	0.96
2DH5	Ant1	2402	1.34
	Ant2	2402	1.34
	Ant1	2441	1.35
	Ant2	2441	1.35
	Ant1	2480	1.34
	Ant2	2480	1.36
3DH5	Ant1	2402	1.31
	Ant2	2402	1.34
	Ant1	2441	1.31
	Ant2	2441	1.31
	Ant1	2480	1.32
	Ant2	2480	1.34

4.5. Test graphs

DH5_Ant1_2402

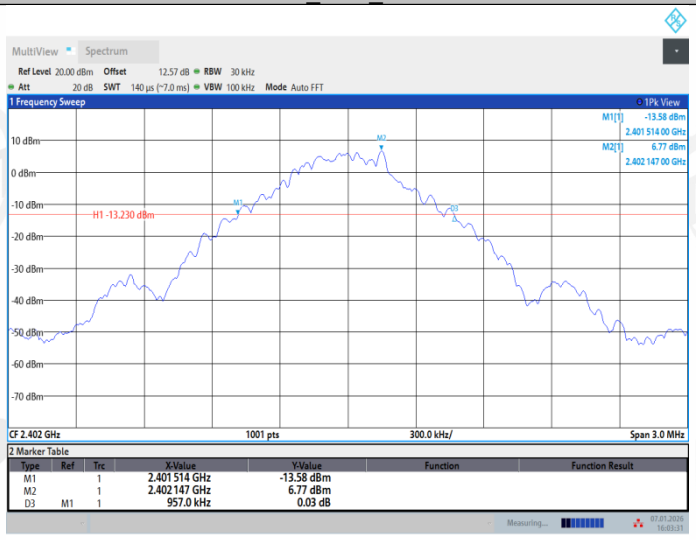

DH5_Ant2_2402

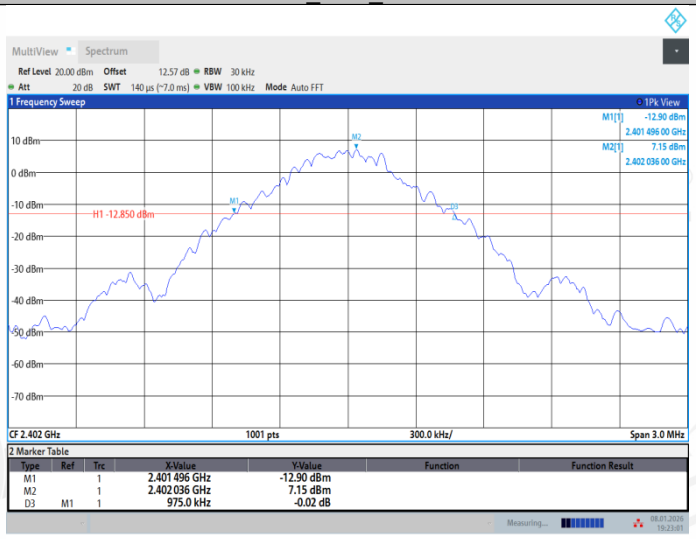

DH5_Ant1_2441

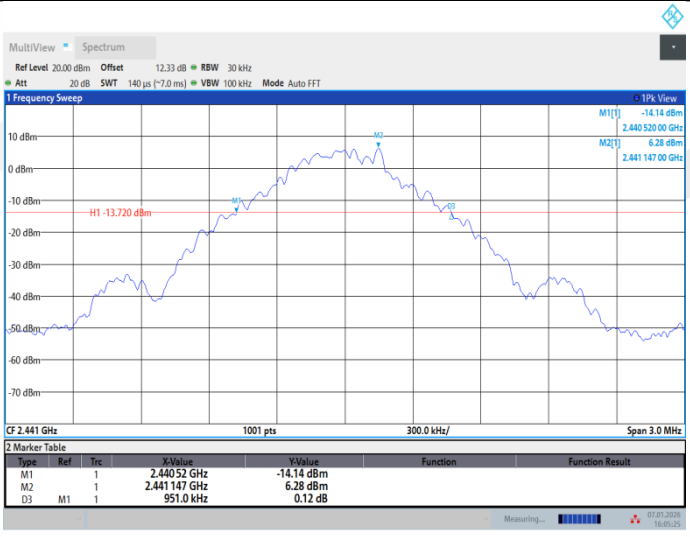

DH5_Ant2_2441

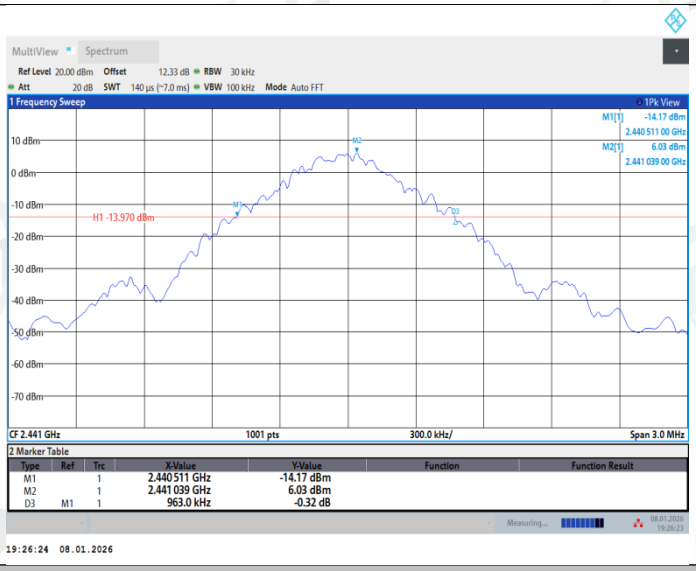

DH5_Ant1_2480

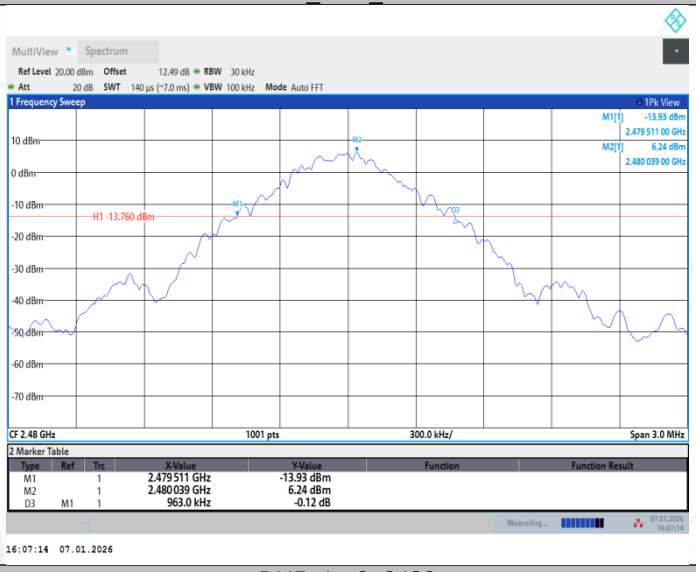

DH5_Ant2_2480

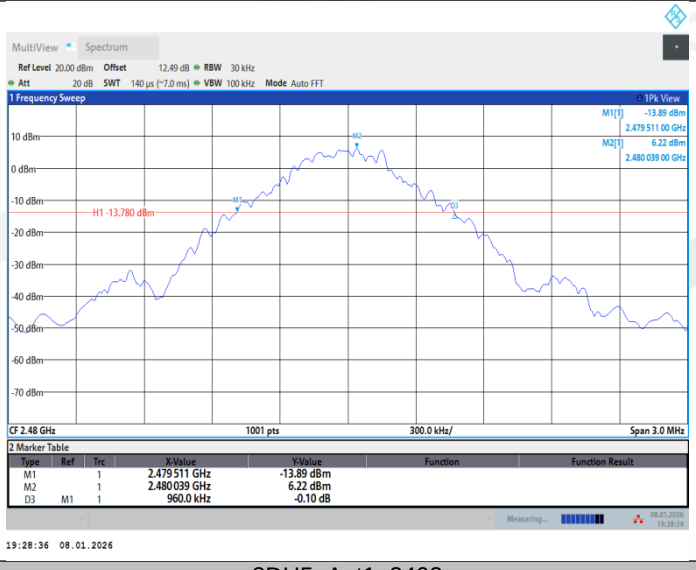

2DH5_Ant1_2402

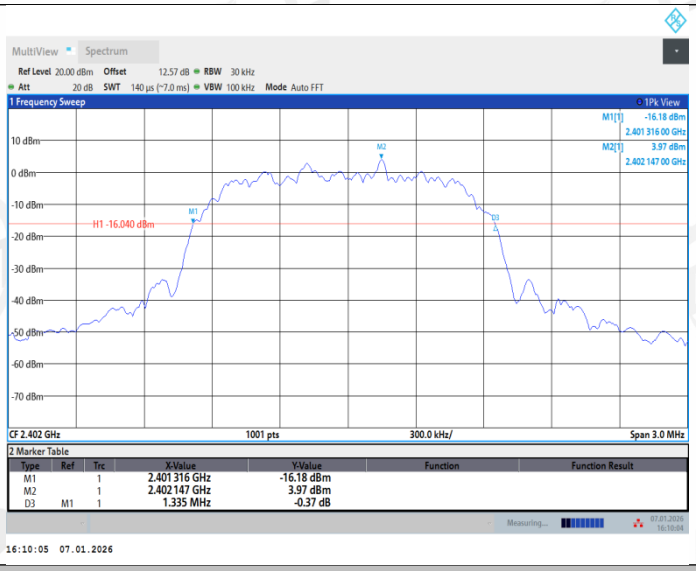

2DH5_Ant2_2402

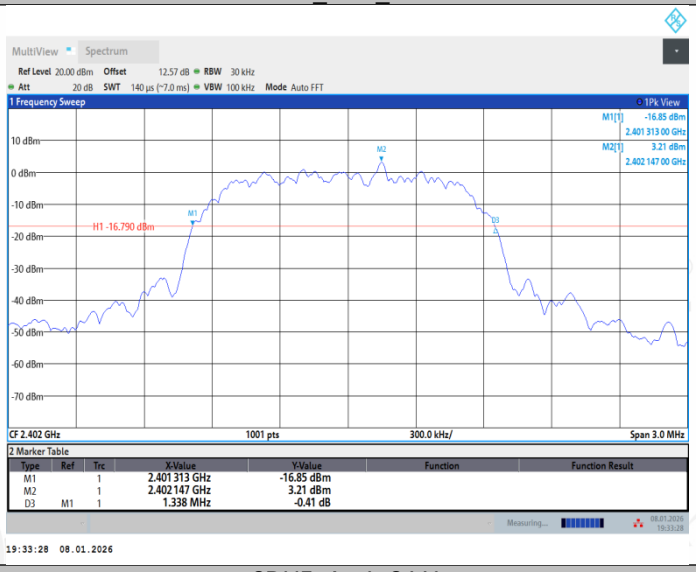

2DH5_Ant1_2441

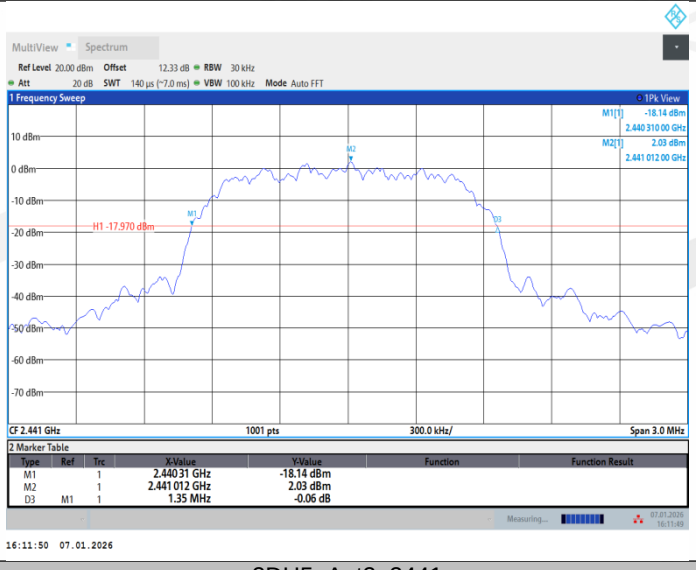

2DH5_Ant2_2441

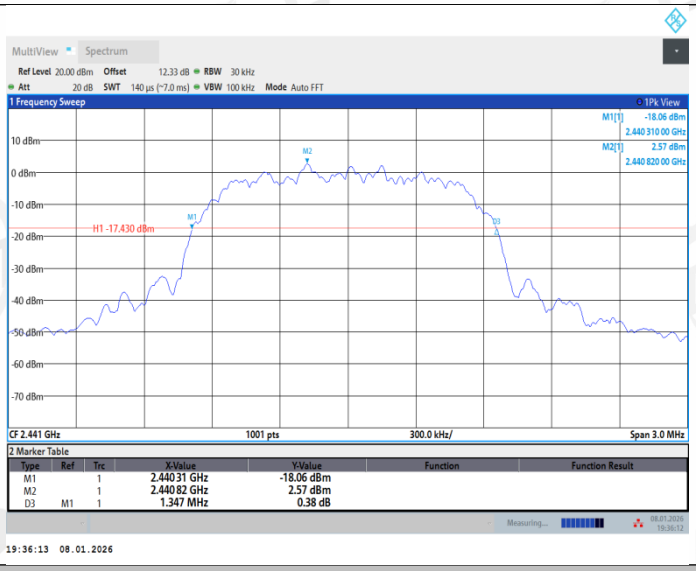

2DH5_Ant1_2480

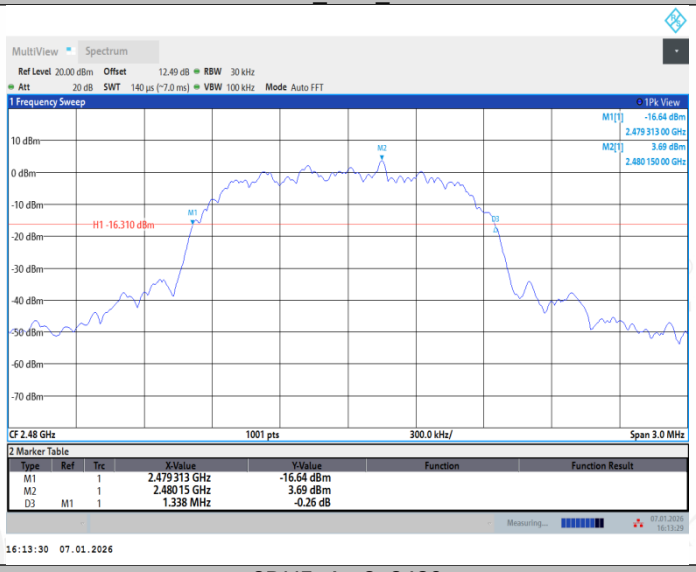

2DH5_Ant2_2480

3DH5_Ant1_2402

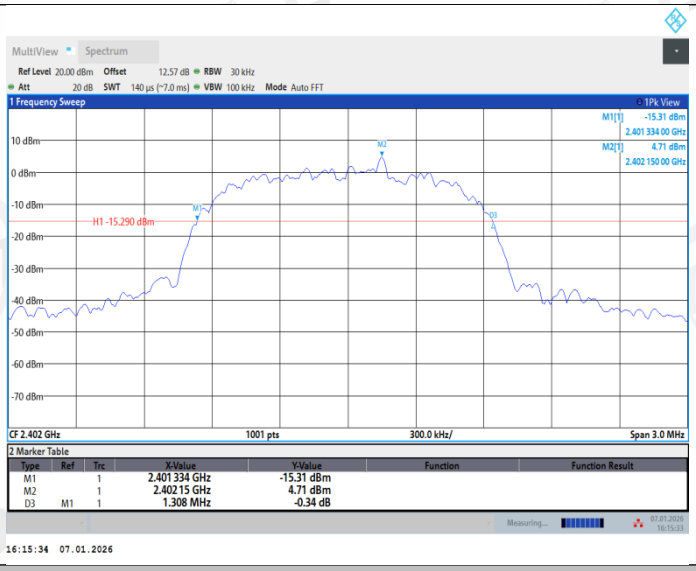

3DH5_Ant2_2402

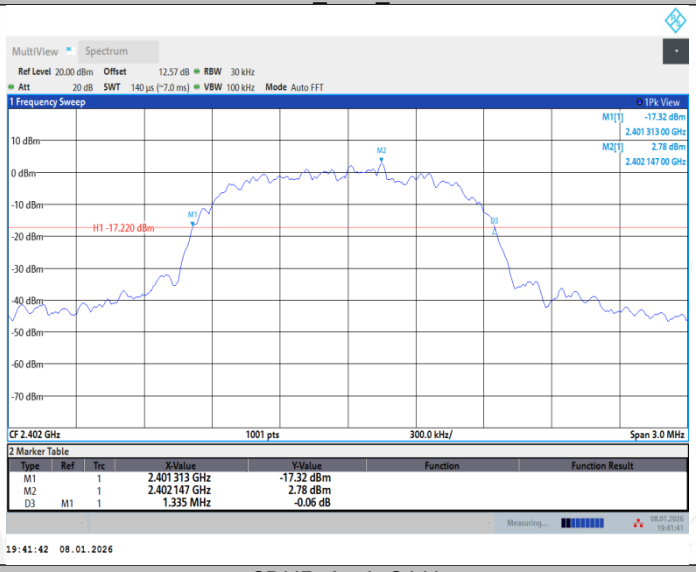

3DH5_Ant1_2441

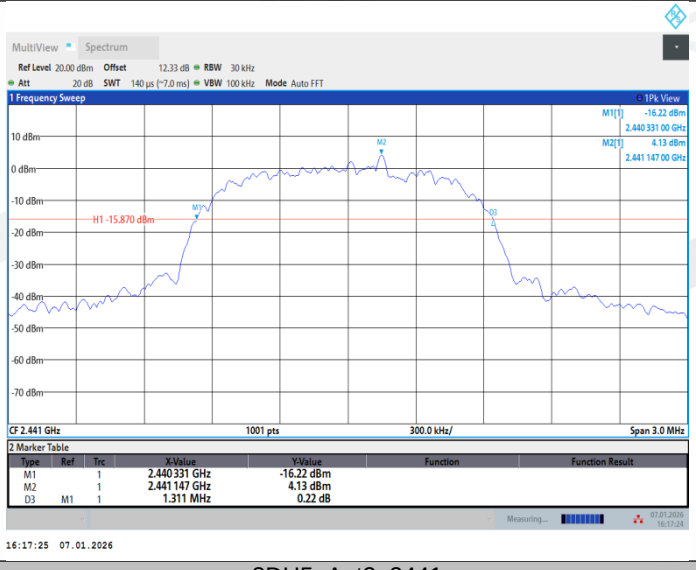

3DH5_Ant2_2441

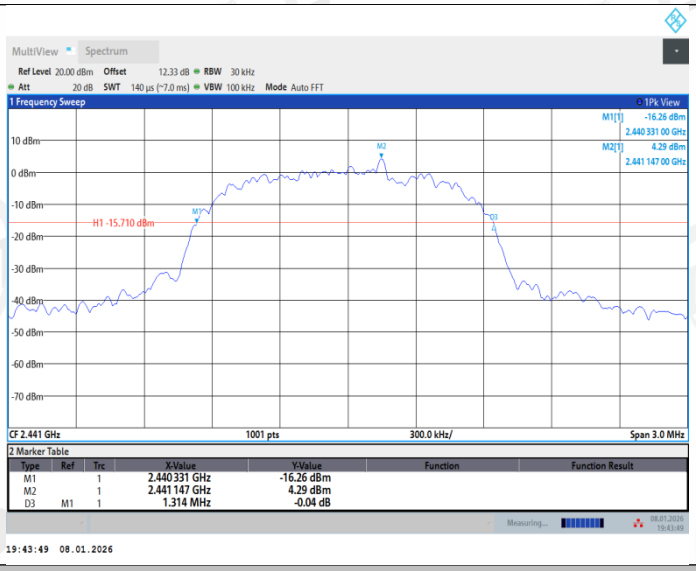

3DH5_Ant1_2480

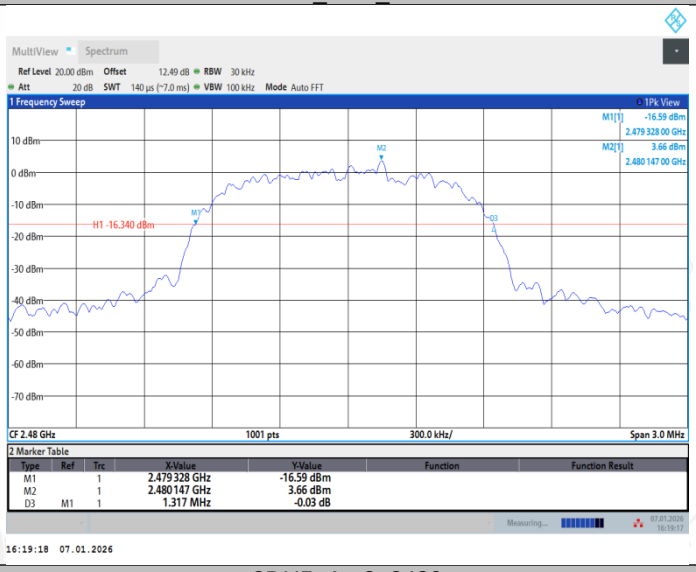

3DH5_Ant2_2480

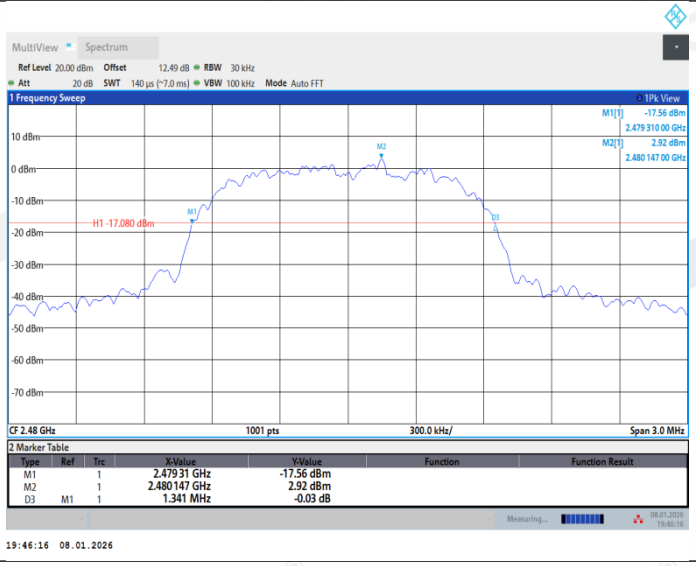

5. 99% Bandwidth

5.1. Block diagram of test setup

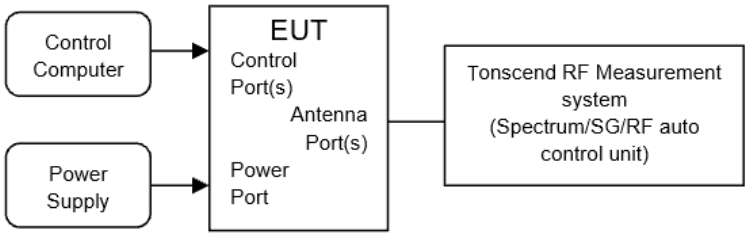

5.2. Limits

Just for Report.

5.3. Test procedure

(1) The test according to ANSI C63.10 clause 6.9.3.
(2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
(3) Set the EUT as maximum power setting and enable the EUT transmit continuously
(4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

(5) Measure and record the results in the report.

5.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement system 4#
Ambient Condition:	24.1-26.5℃,37.1-45.2%RH	Test Date:	2026.01.07-2026.01.16
Test Power Supply:	Battery	Sample Number:	S25103113-004

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant1	2402	0.88977	2401.5389	2402.4287
	Ant2	2402	0.89168	2401.5378	2402.4295
	Ant1	2441	0.89092	2440.5385	2441.4294
	Ant2	2441	0.89453	2440.5368	2441.4313
	Ant1	2480	0.88717	2479.5380	2480.4252
	Ant2	2480	0.88150	2479.5404	2480.4219
2DH5	Ant1	2402	1.1954	2401.3868	2402.5822
	Ant2	2402	1.1927	2401.3870	2402.5797
	Ant1	2441	1.1934	2440.3873	2441.5808
	Ant2	2441	1.1933	2440.3891	2441.5824
	Ant1	2480	1.1924	2479.3887	2480.5812
	Ant2	2480	1.1887	2479.3892	2480.5780
3DH5	Ant1	2402	1.1977	2401.3856	2402.5833
	Ant2	2402	1.1904	2401.3906	2402.5810
	Ant1	2441	1.1908	2440.3894	2441.5802
	Ant2	2441	1.1928	2440.3893	2441.5821
	Ant1	2480	1.1898	2479.3909	2480.5807
	Ant2	2480	1.1956	2479.3879	2480.5835

5.5. Test graphs

DH5_Ant1_2402

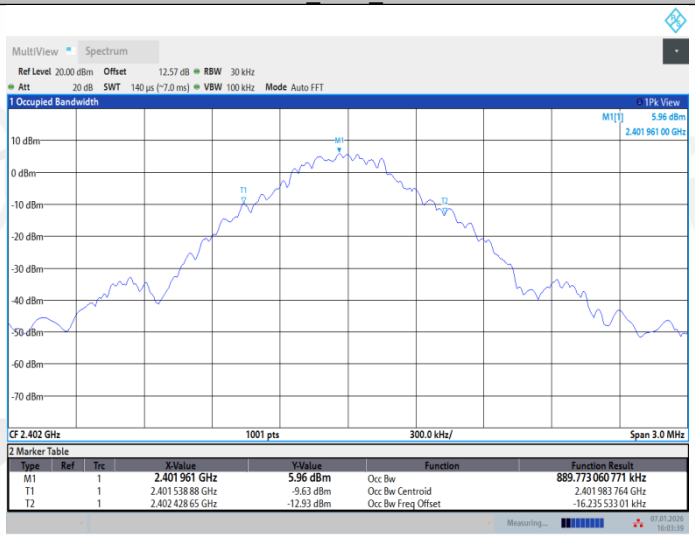

DH5_Ant2_2402

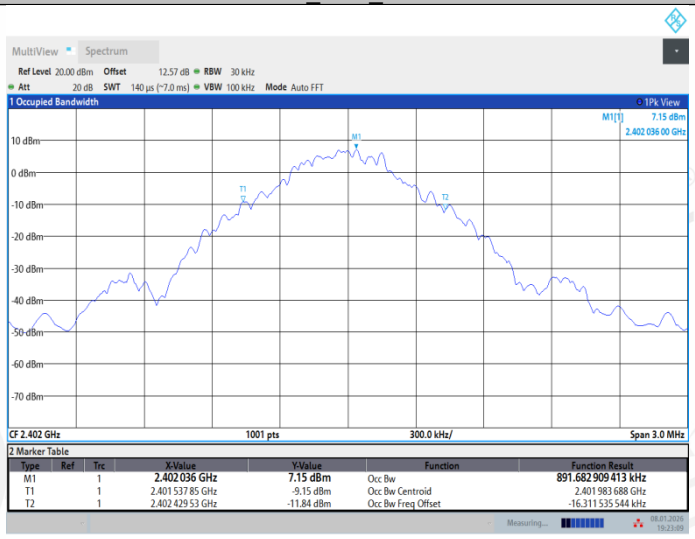

DH5_Ant1_2441

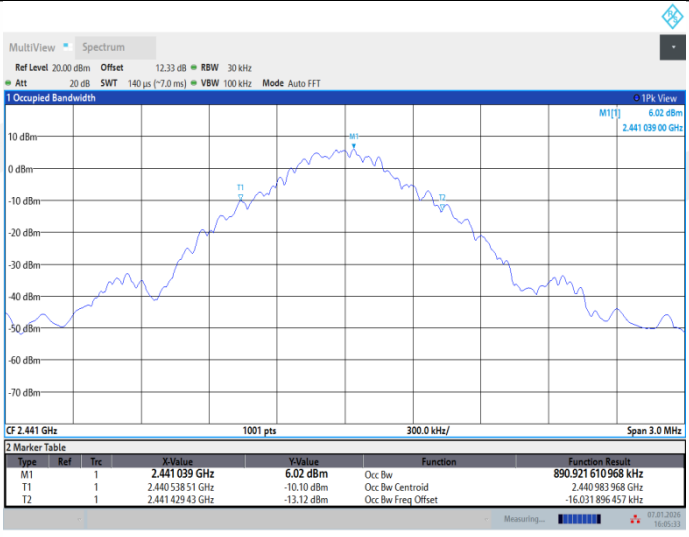

DH5_Ant2_2441

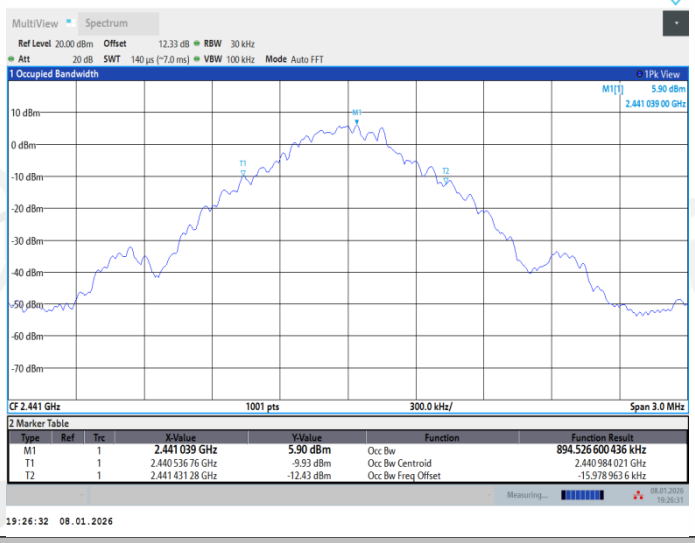

DH5_Ant1_2480

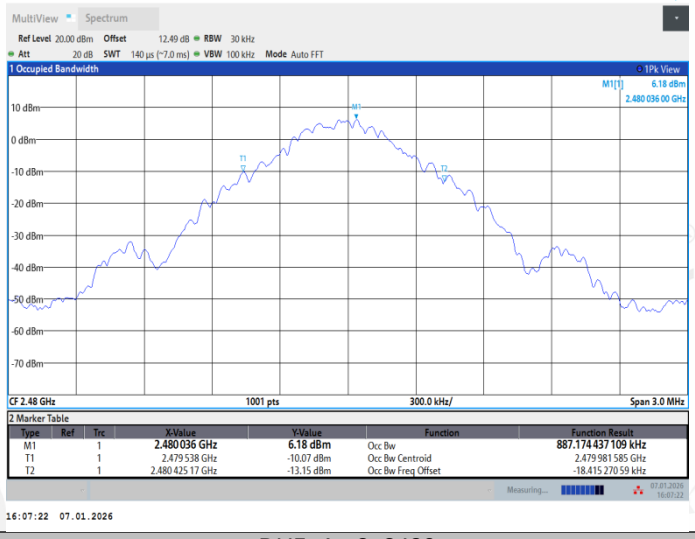

DH5_Ant2_2480

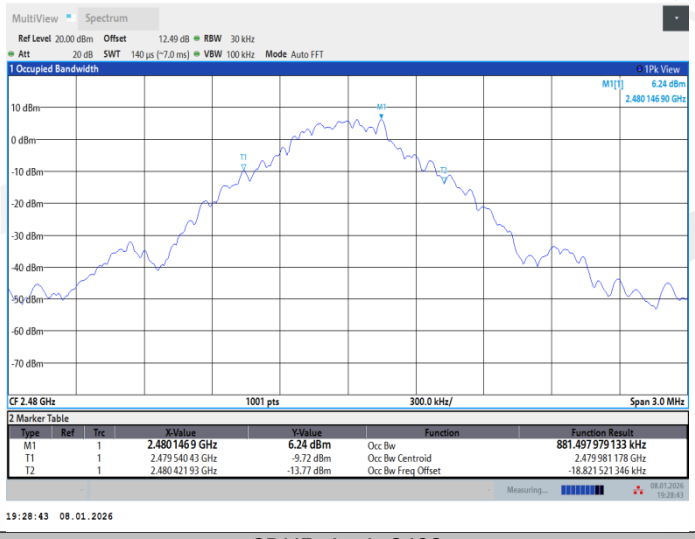

2DH5_Ant1_2402

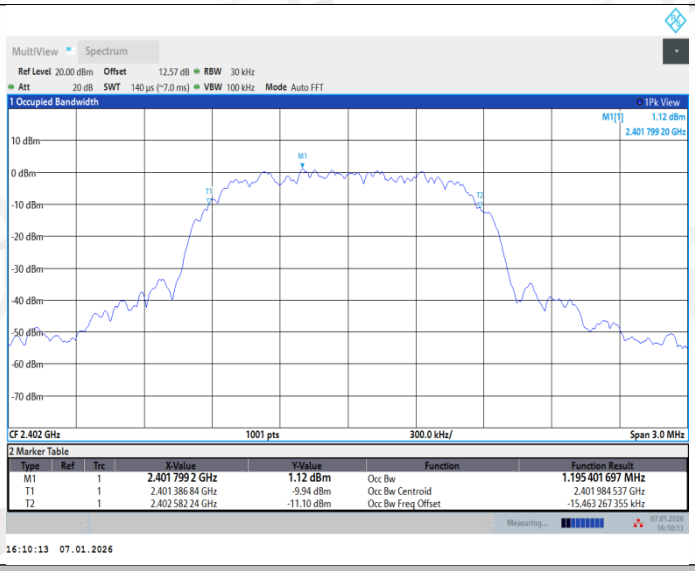

2DH5_Ant2_2402

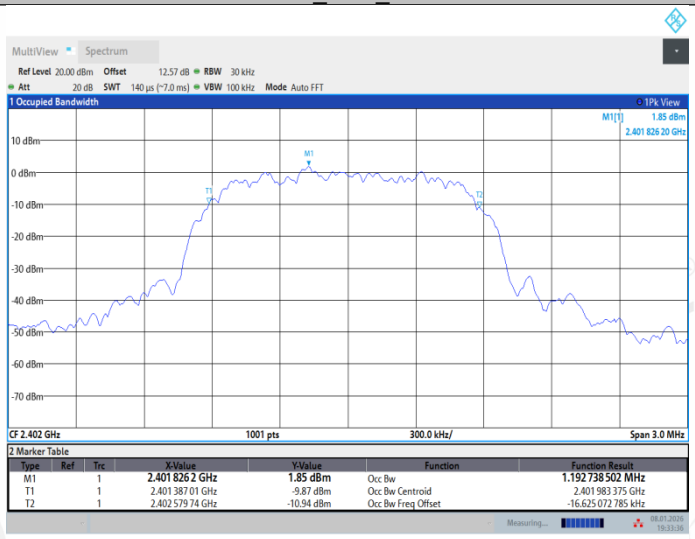

2DH5_Ant1_2441

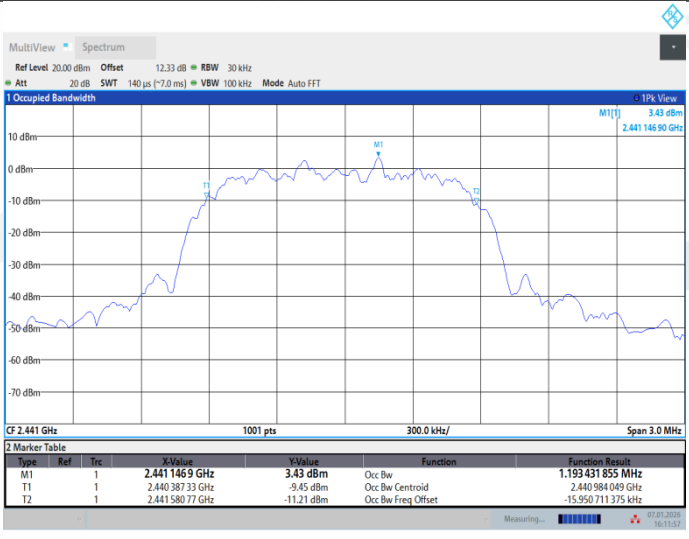

2DH5_Ant2_2441

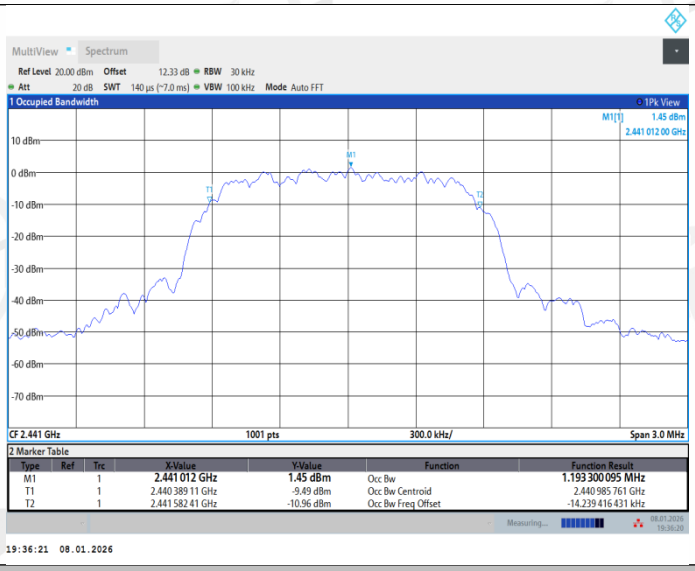

2DH5_Ant1_2480

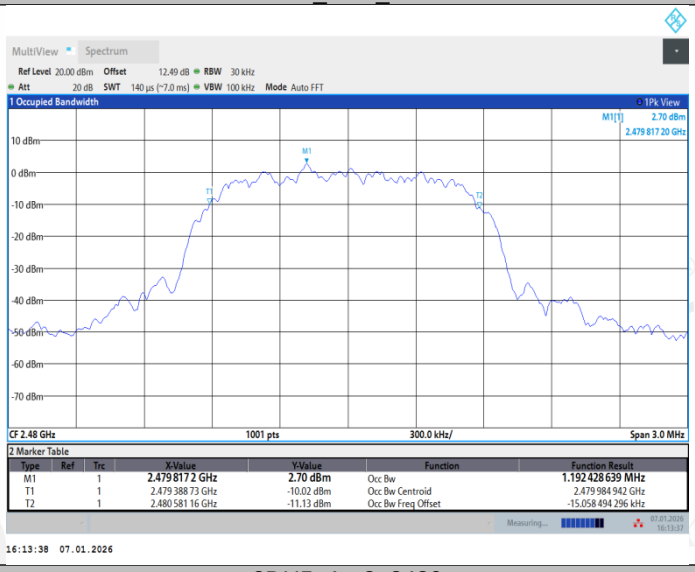

2DH5_Ant2_2480

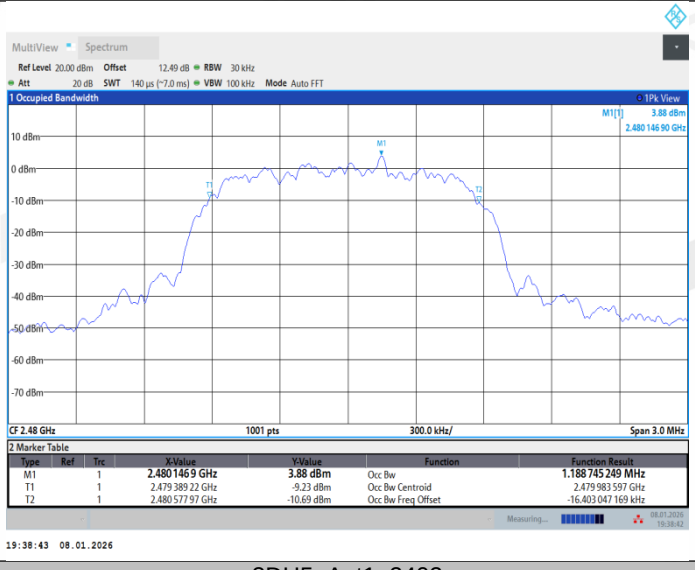

3DH5_Ant1_2402

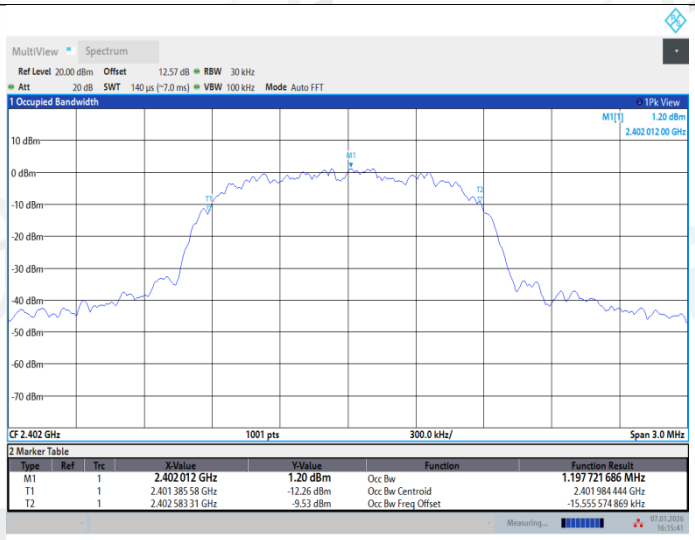

3DH5_Ant2_2402

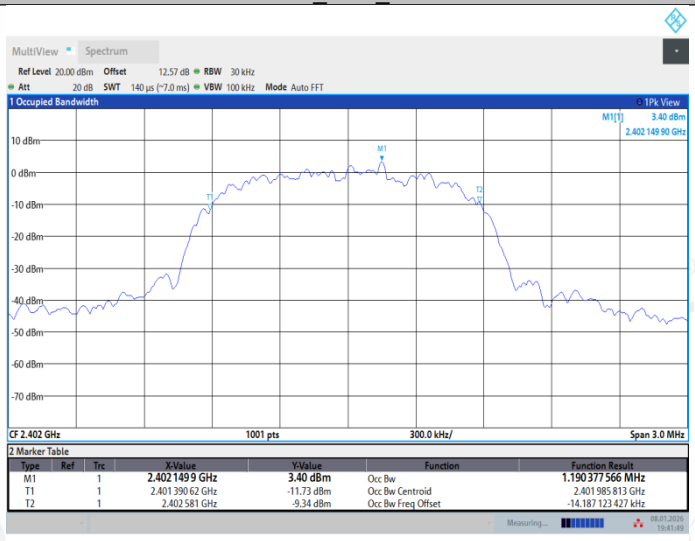

3DH5_Ant1_2441

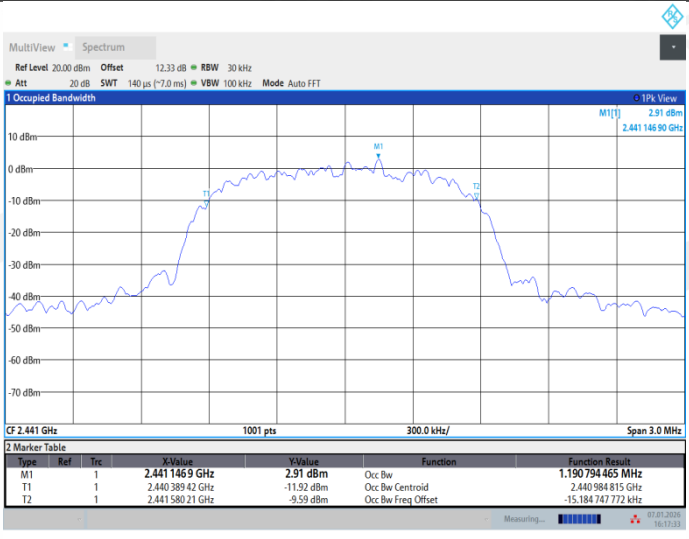

3DH5_Ant2_2441

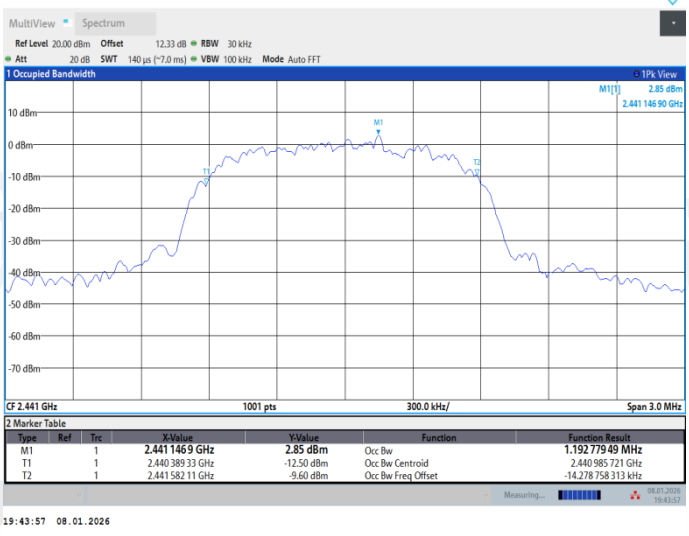

3DH5_Ant1_2480

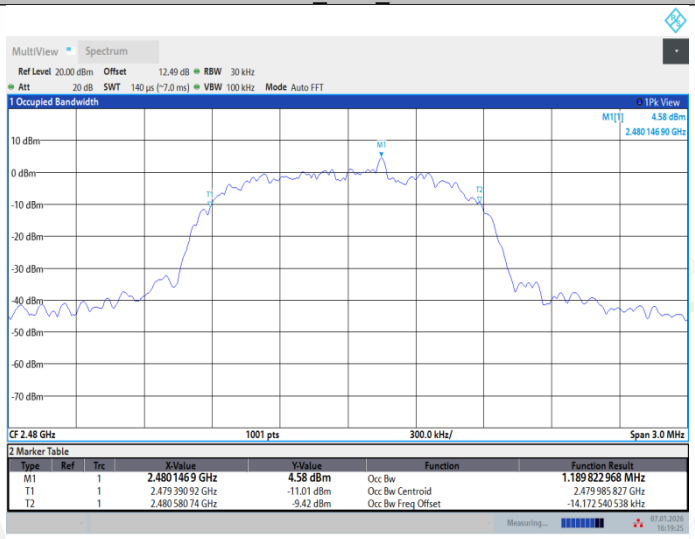

3DH5_Ant2_2480

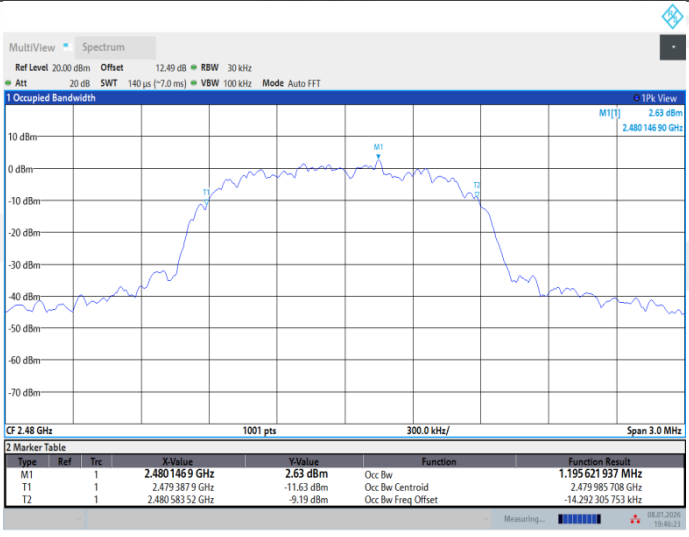

6. Maximum Peak Output Power

6.1. Block diagram of test setup

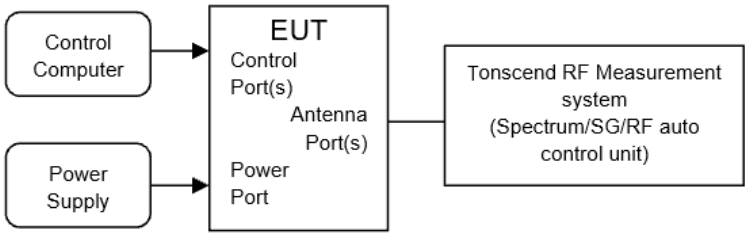

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

6.3. Test procedure

(1) The test according to ANSI C63.10 clause 7.8.5.
(2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
(3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
(4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	VBW ≥ RBW.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

(5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.

6.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement system 4#
Ambient Condition:	24.1-26.5℃,37.1-45.2%RH	Test Date:	2026.01.07-2026.01.16
Test Power Supply:	Battery	Sample Number:	S25103113-004

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	9.26	≤20.97	PASS
	Ant2	2402	9.14	≤20.97	PASS
	Ant1	2441	9.01	≤20.97	PASS
	Ant2	2441	9.05	≤20.97	PASS
	Ant1	2480	9.20	≤20.97	PASS
	Ant2	2480	9.21	≤20.97	PASS
2DH5	Ant1	2402	9.86	≤20.97	PASS
	Ant2	2402	9.75	≤20.97	PASS
	Ant1	2441	9.50	≤20.97	PASS
	Ant2	2441	9.66	≤20.97	PASS
	Ant1	2480	9.74	≤20.97	PASS
	Ant2	2480	9.91	≤20.97	PASS
3DH5	Ant1	2402	10.47	≤20.97	PASS
	Ant2	2402	10.40	≤20.97	PASS
	Ant1	2441	10.14	≤20.97	PASS
	Ant2	2441	10.28	≤20.97	PASS
	Ant1	2480	10.47	≤20.97	PASS
	Ant2	2480	10.53	≤20.97	PASS

6.5. Test graphs

DH5_Ant1_2402

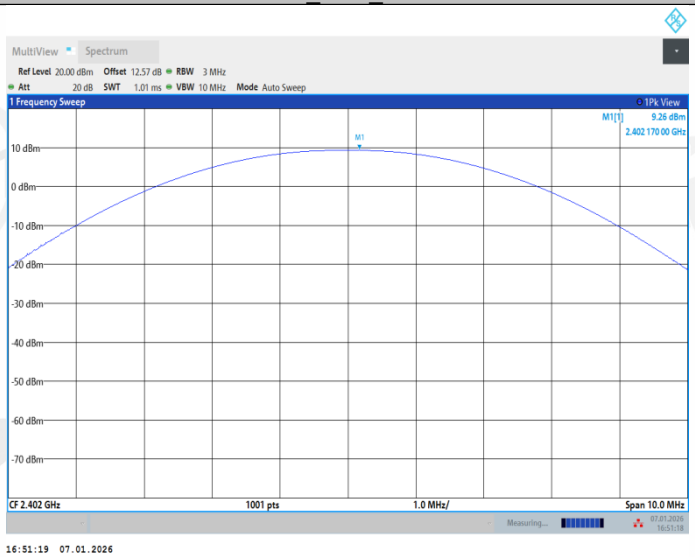

DH5_Ant2_2402

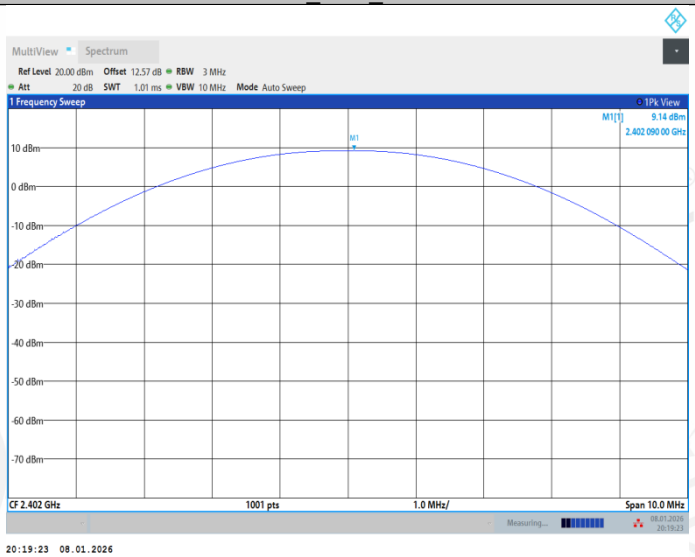

DH5_Ant1_2441

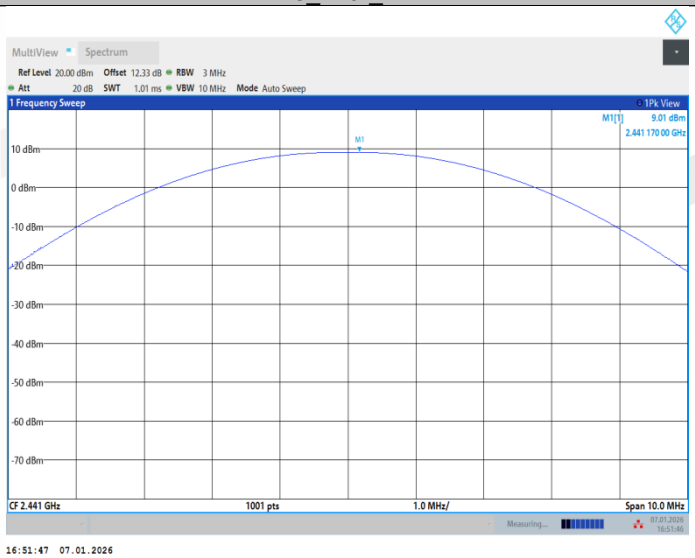

DH5_Ant2_2441

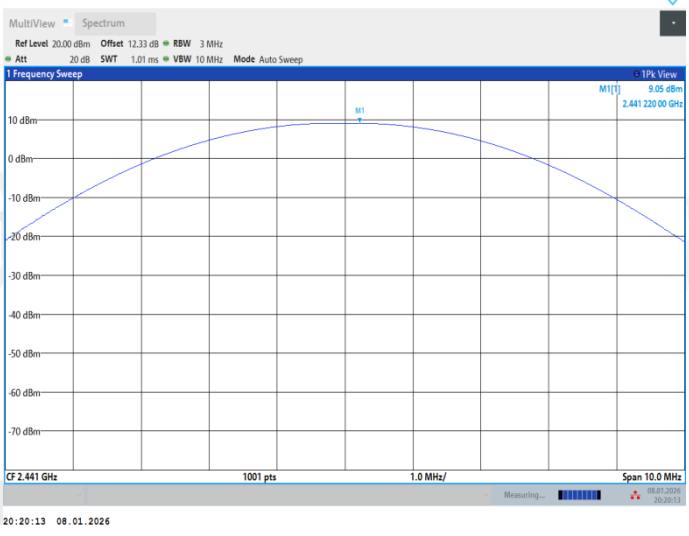

DH5_Ant1_2480

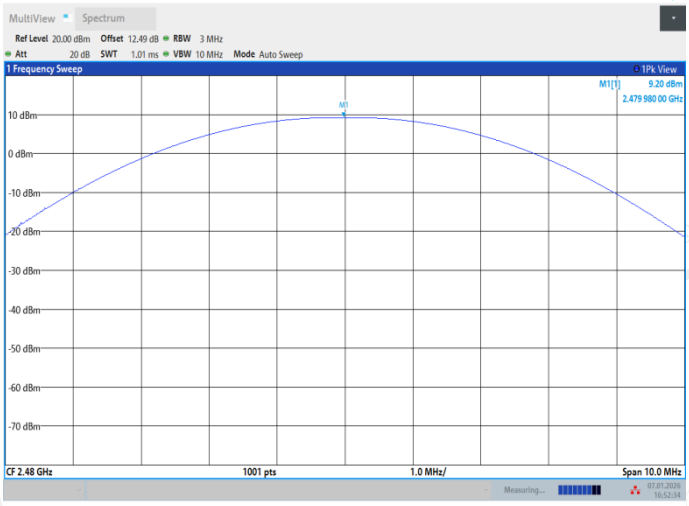

DH5_Ant2_2480

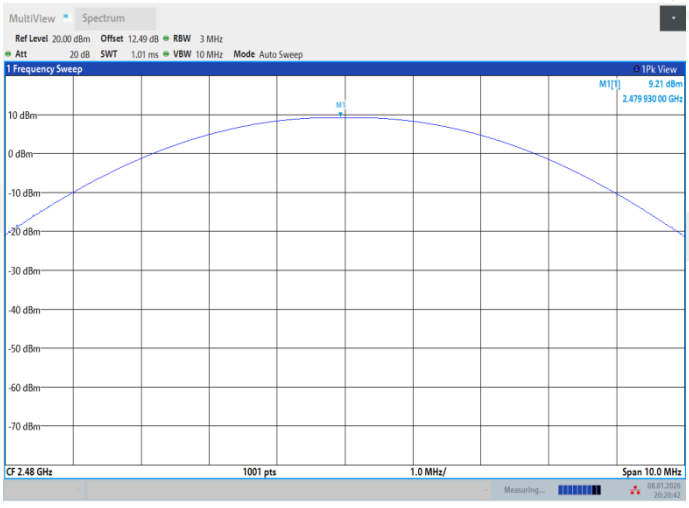

2DH5_Ant1_2402

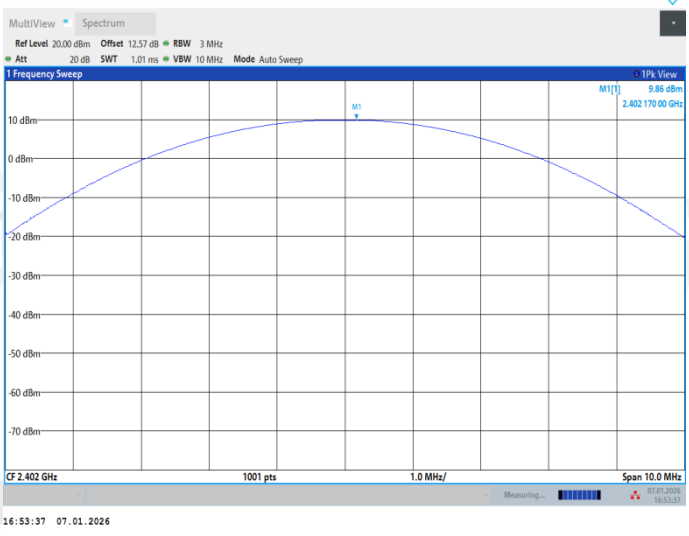

2DH5_Ant2_2402

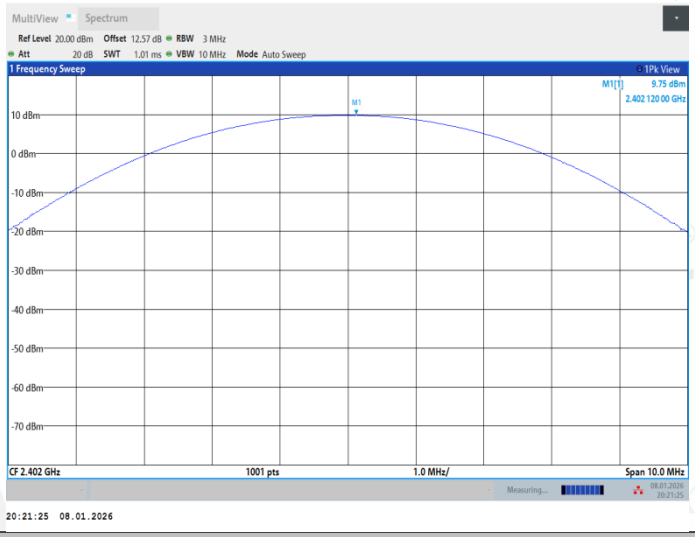

2DH5_Ant1_2441

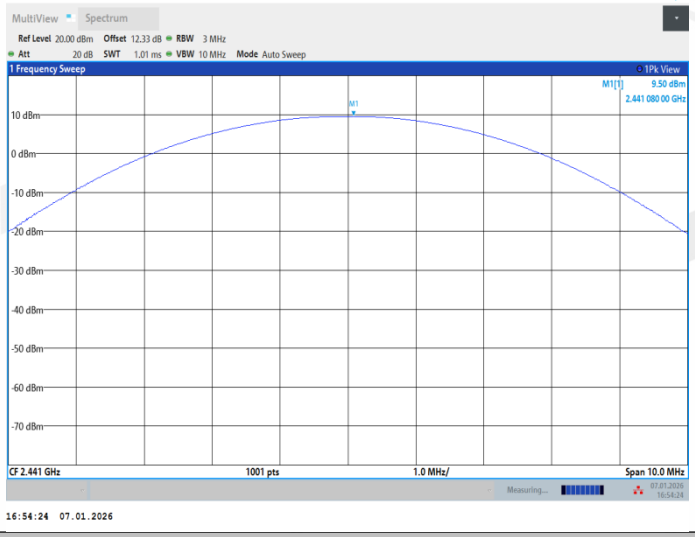

2DH5_Ant2_2441

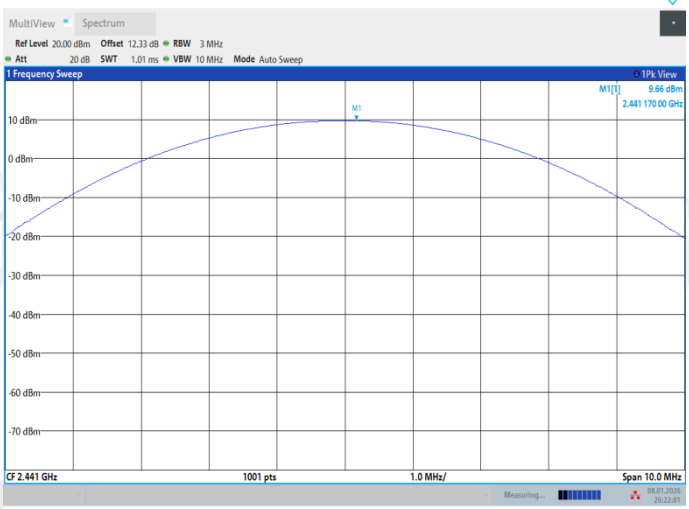

2DH5_Ant1_2480

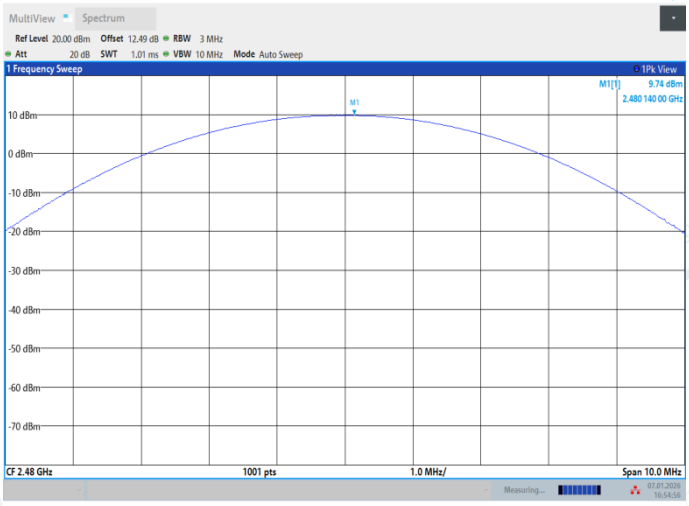

2DH5_Ant2_2480

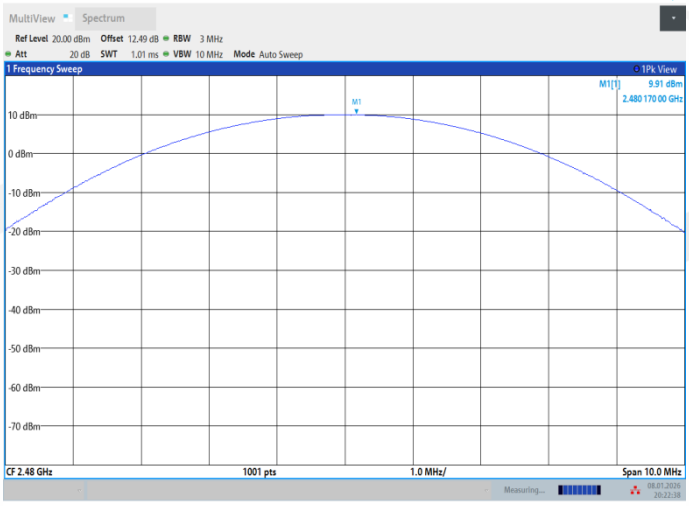

3DH5_Ant1_2402

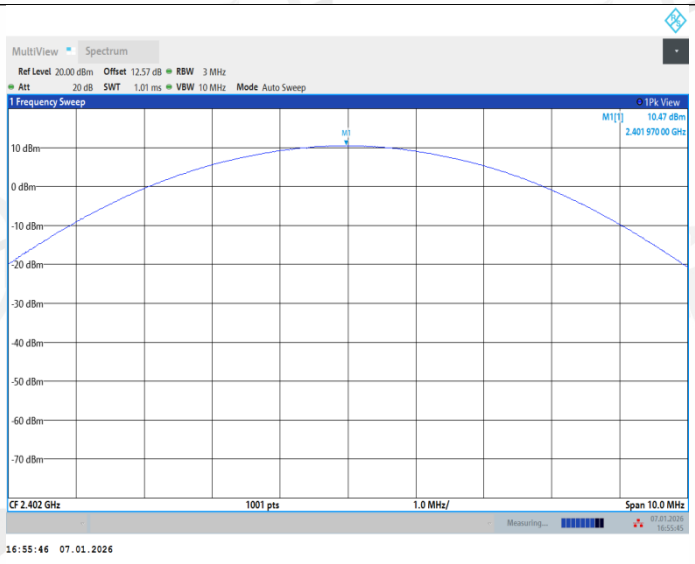

3DH5_Ant2_2402

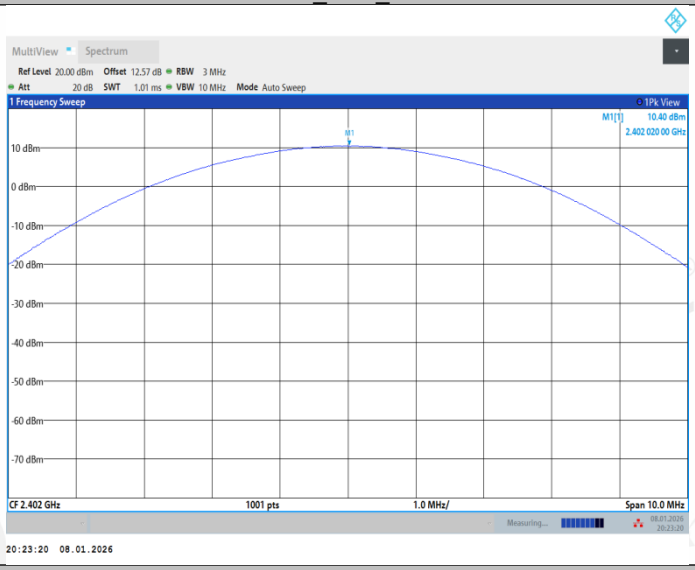

3DH5_Ant1_2441

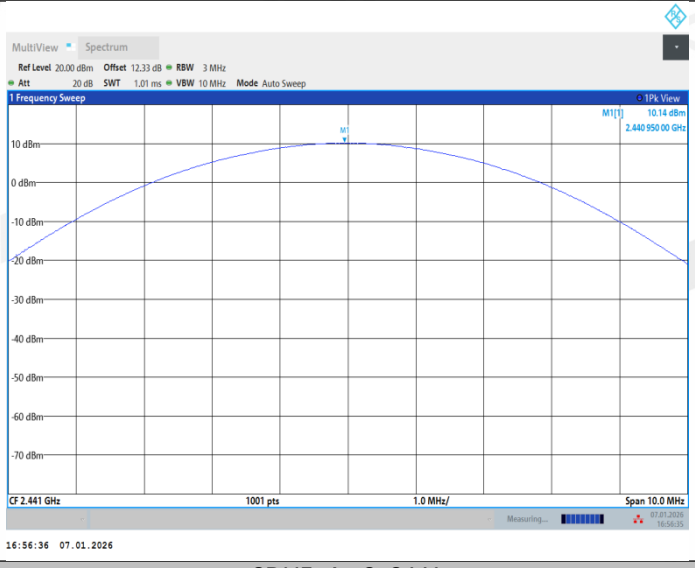

3DH5_Ant2_2441

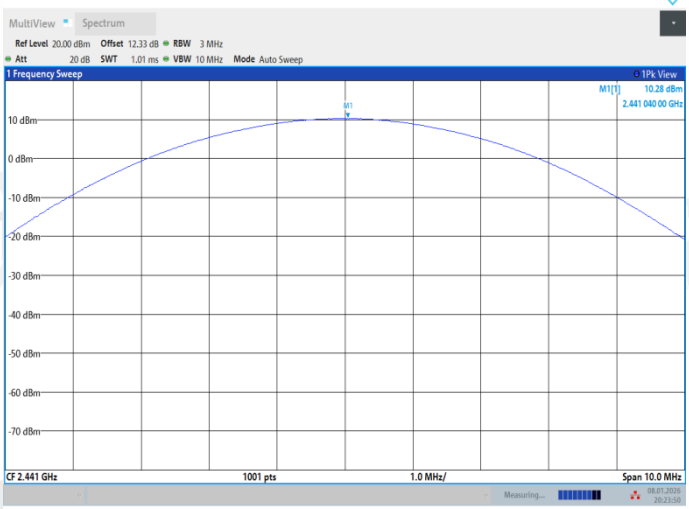

3DH5_Ant1_2480

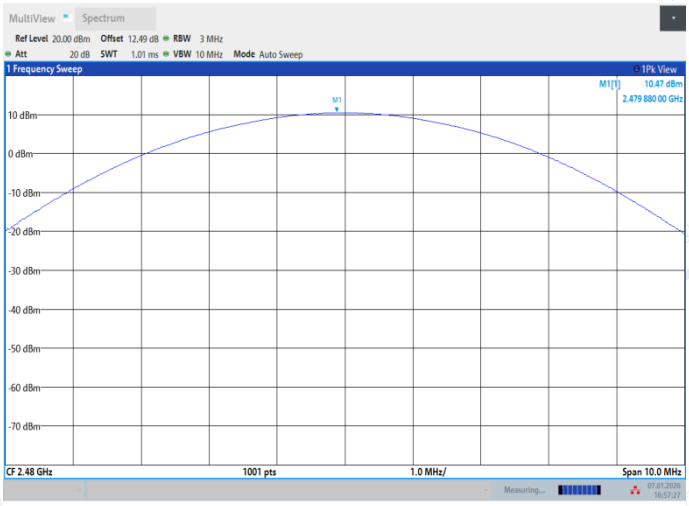

3DH5_Ant2_2480

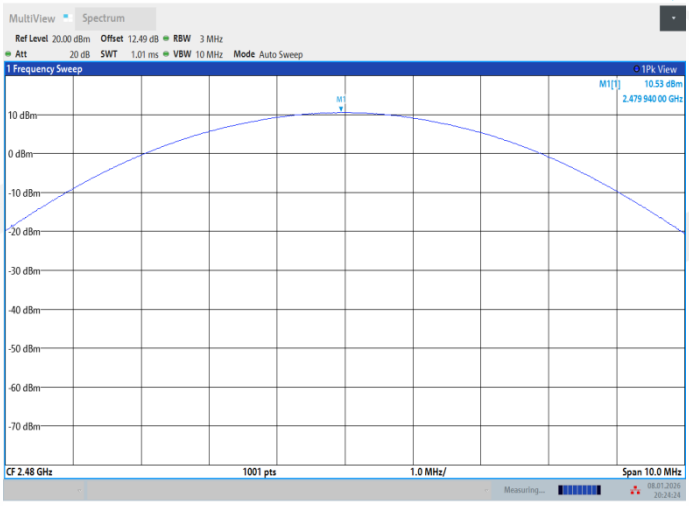

7. Carrier Frequency Separation

7.1. Block diagram of test setup

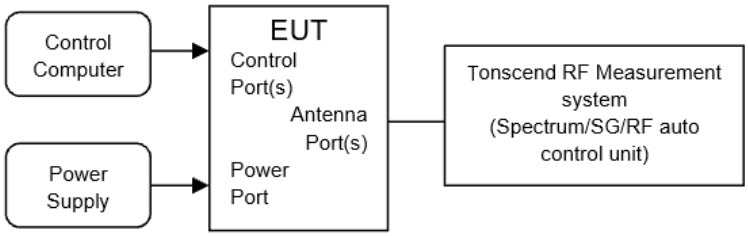

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

(1) The test according to ANSI C63.10 clause 7.8.2.
(2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
(3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
(4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	approximately 30% of the channel spacing
VBW:	VBW ≥ RBW.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

(5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement system 4#
Ambient Condition:	24.1-26.5℃,37.1-45.2%RH	Test Date:	2026.01.07-2026.01.16
Test Power Supply:	Battery	Sample Number:	S25103113-004

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1	≥0.960	PASS
	Ant2	Hop	1	≥0.980	PASS
2DH5	Ant1	Hop	1.006	≥0.900	PASS
	Ant2	Hop	1.008	≥0.907	PASS
3DH5	Ant1	Hop	0.998	≥0.880	PASS
	Ant2	Hop	1.004	≥0.893	PASS

7.5. Test graphs

DH5_Ant1_Hop

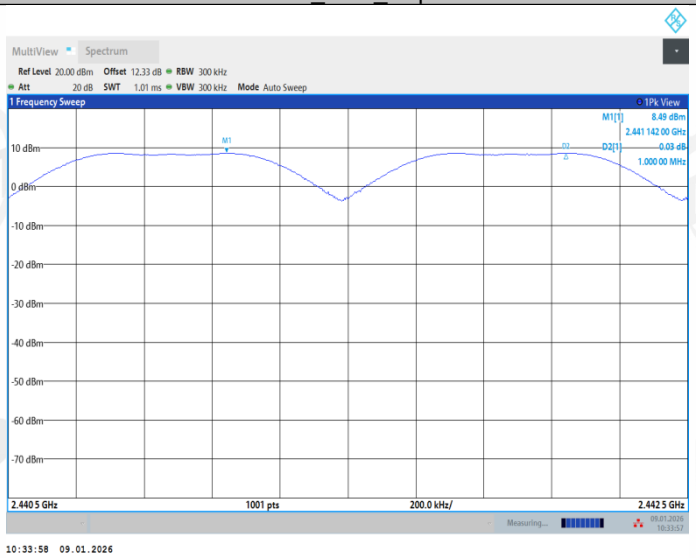

DH5_Ant2_Hop

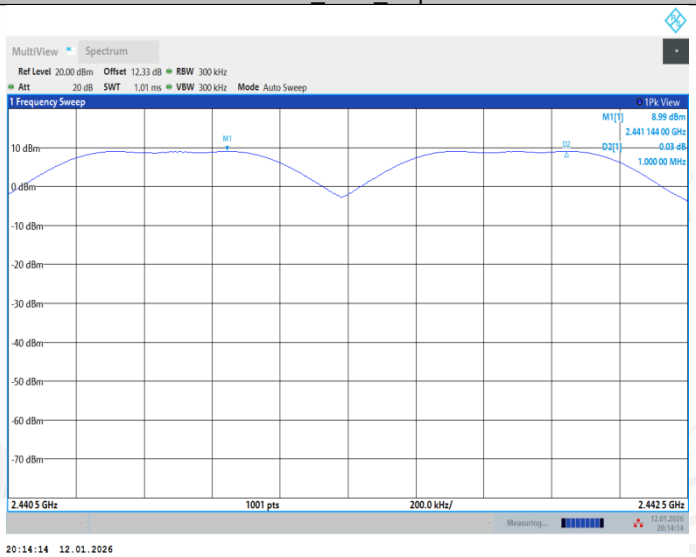

2DH5_Ant1_Hop

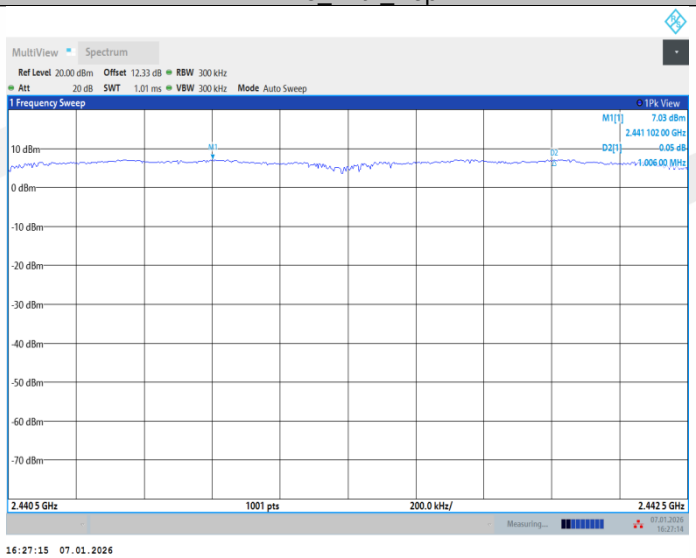

2DH5_Ant2_Hop

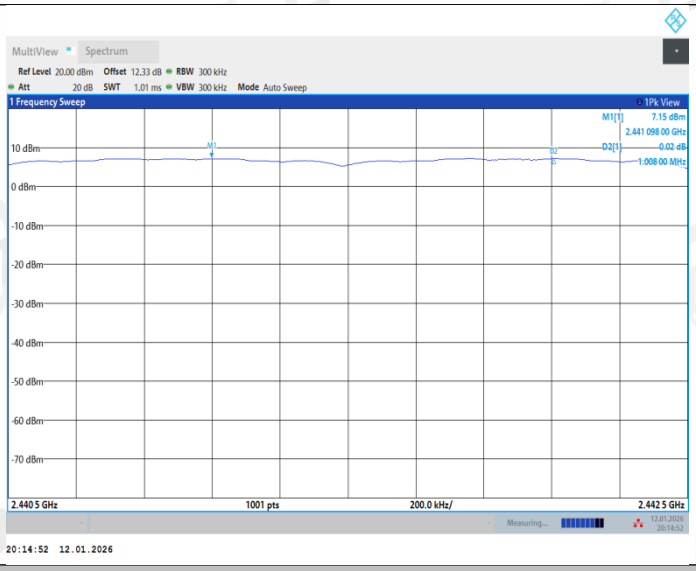

3DH5_Ant1_Hop

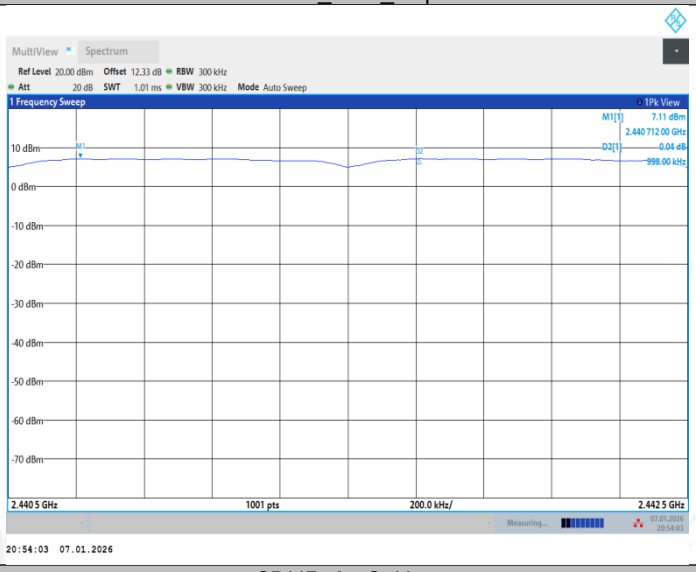

3DH5_Ant2_Hop

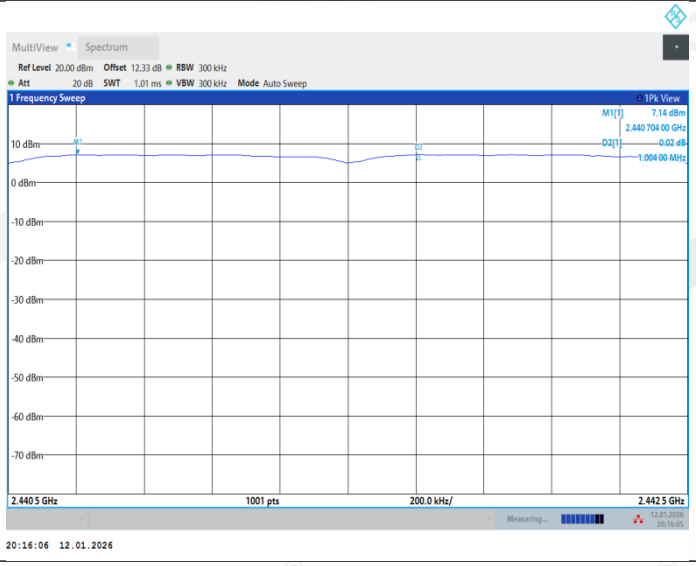

8. Dwell Time

8.1. Block diagram of test setup

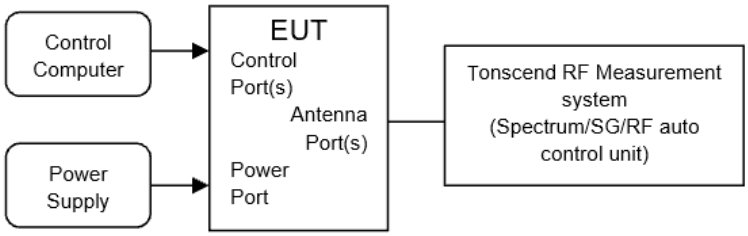

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

(1) The test according to ANSI C63.10 clause 7.8.4.
(2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
(3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
(4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	≤ channel spacing and where possible RBW should be set >>1 / T
VBW:	VBW ≥ RBW.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.

(5) The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s
(6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops *pulse's on time.
(7) Measure and record the results in the report.

8.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement system 4#
Ambient Condition:	24.1-26.5℃,37.1-45.2%RH	Test Date:	2026.01.07-2026.01.16
Test Power Supply:	Battery	Sample Number:	S25103113-004

Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.370	320	0.118	≤0.4	PASS
	Ant2	Hop	0.360	321	0.116	≤0.4	PASS
DH3	Ant1	Hop	1.630	156	0.254	≤0.4	PASS
	Ant2	Hop	1.620	151	0.245	≤0.4	PASS
DH5	Ant1	Hop	2.880	112	0.323	≤0.4	PASS
	Ant2	Hop	2.880	101	0.291	≤0.4	PASS
2DH1	Ant1	Hop	0.370	321	0.119	≤0.4	PASS
	Ant2	Hop	0.370	320	0.118	≤0.4	PASS
2DH3	Ant1	Hop	1.620	154	0.249	≤0.4	PASS
	Ant2	Hop	1.630	164	0.267	≤0.4	PASS
2DH5	Ant1	Hop	2.880	89	0.256	≤0.4	PASS
	Ant2	Hop	2.870	99	0.284	≤0.4	PASS
3DH1	Ant1	Hop	0.370	320	0.118	≤0.4	PASS
	Ant2	Hop	0.370	321	0.119	≤0.4	PASS
3DH3	Ant1	Hop	1.620	164	0.266	≤0.4	PASS
	Ant2	Hop	1.620	163	0.264	≤0.4	PASS
3DH5	Ant1	Hop	2.870	95	0.273	≤0.4	PASS
	Ant2	Hop	2.880	112	0.323	≤0.4	PASS

8.5. Test graphs

DH1_Ant1_Hop

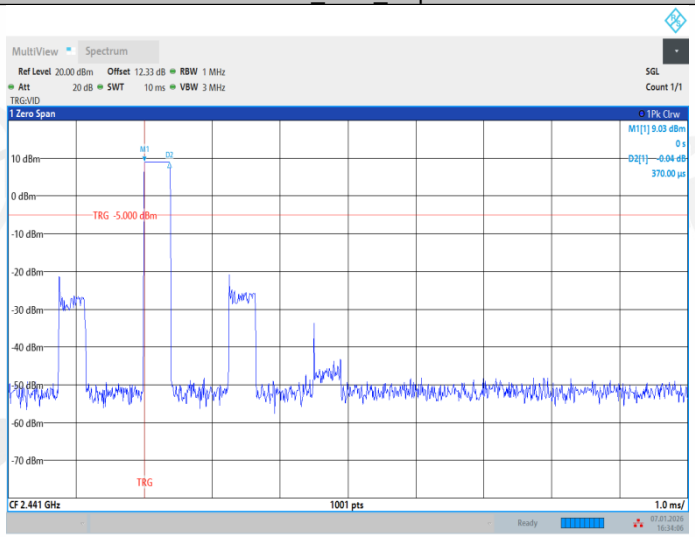

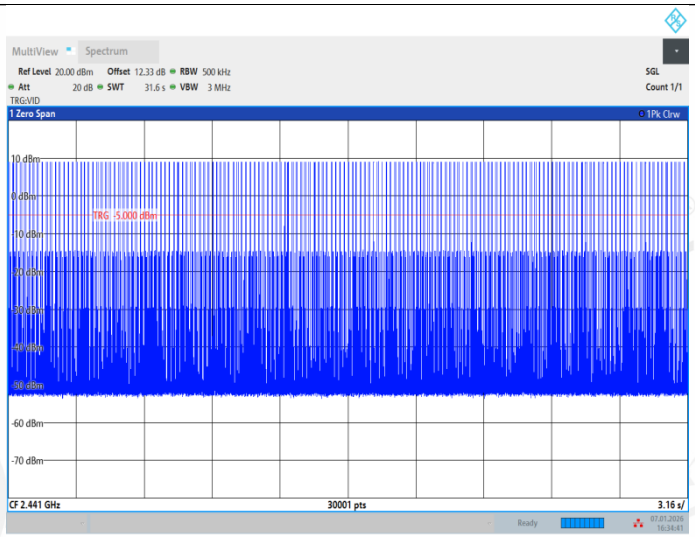

DH1_Ant2_Hop

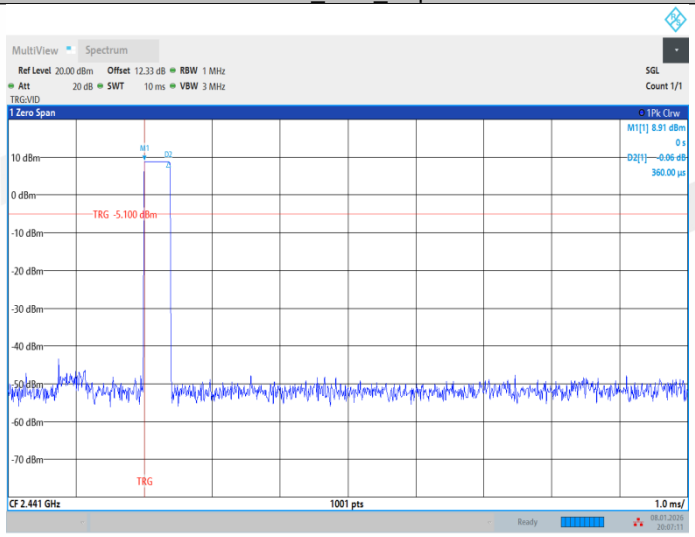

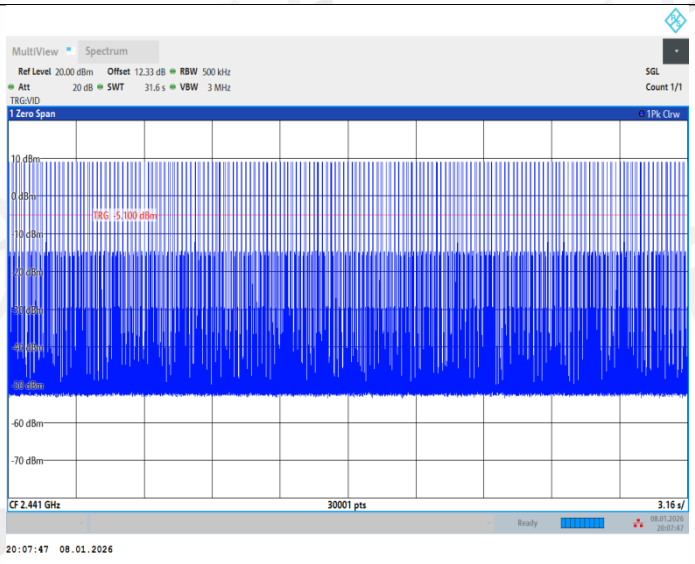

DH3_Ant1_Hop

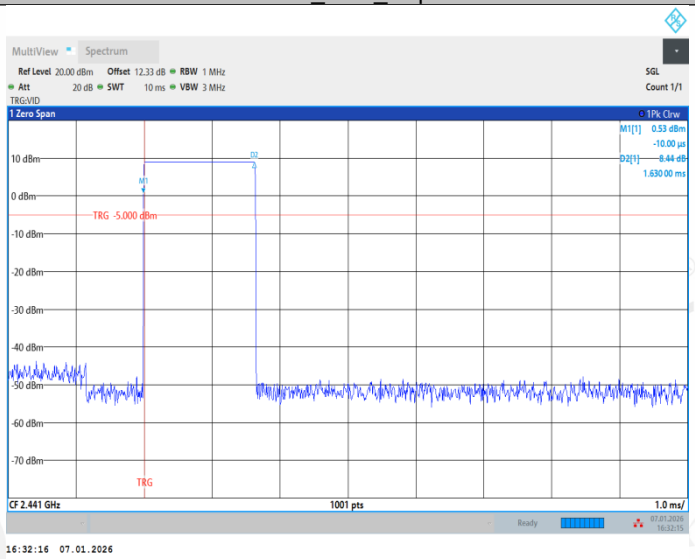

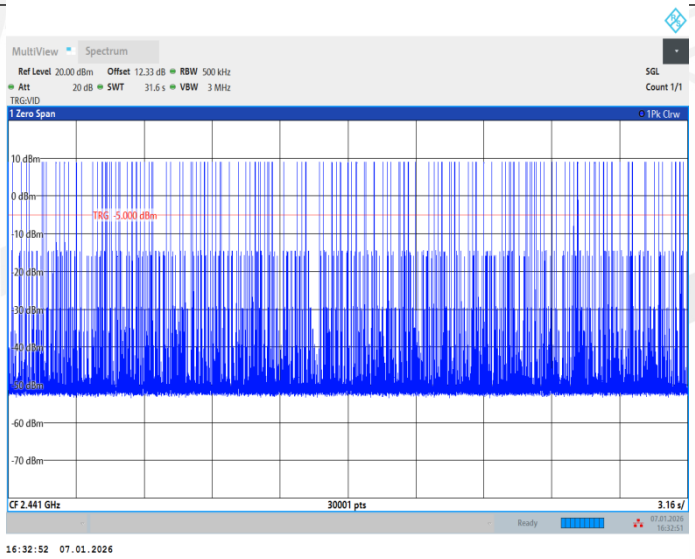

DH3_Ant2_Hop

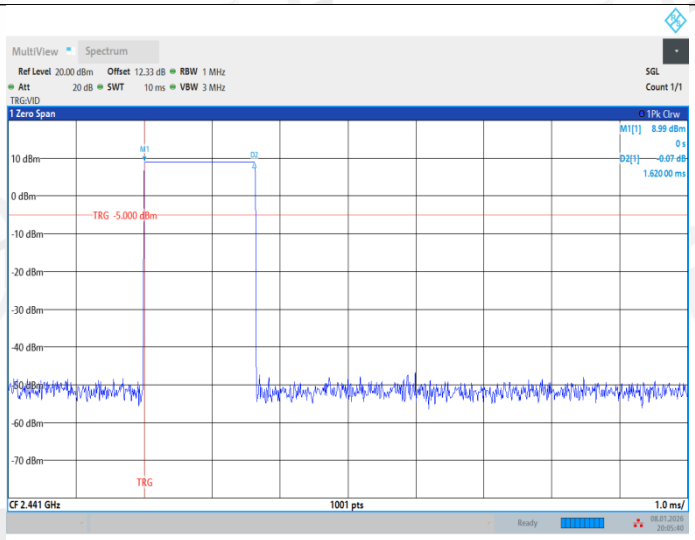
MultiView
Spectrum
Ref Level 20.00 dBm Offset 12.33 dB RBW 1 MHz
Att 20 dB SWT 10 ms VBW 3 MHz
SGL
Count 1/1
TRG/VID
1 Zero Span
1Pk Clrw
M1[1] 8.99 dBm
0 s
D2[1] -0.07 dB
1.620 00 ms
10 dBm
0 dBm
TRG -5.000 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
TRG
CF 2.441 GHz
1001 pts
1.0 ms/
Ready
20:05:41 08.01.2026

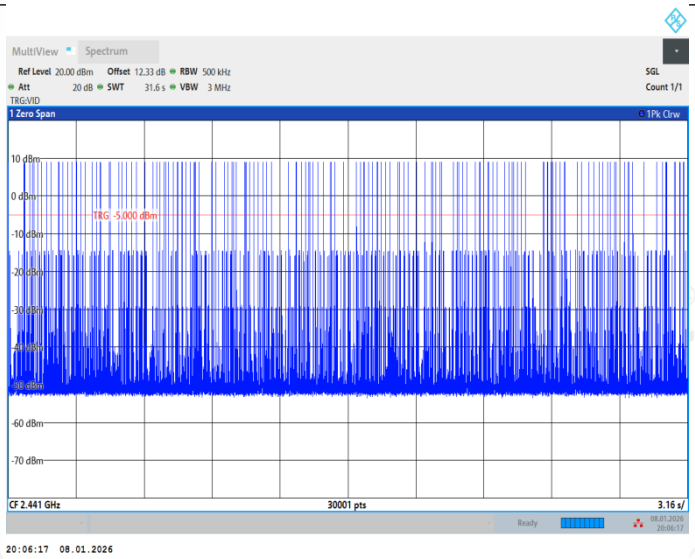
MultiView
Spectrum
Ref Level 20.00 dBm Offset 12.33 dB RBW 500 kHz
Att 20 dB SWT 31.6 s VBW 3 MHz
SGL
Count 1/1
TRG/VID
1 Zero Span
1Pk Clrw
10 dBm
0 dBm
TRG -5.000 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
CF 2.441 GHz
30001 pts
3.16 s/
Ready
20:06:17 08.01.2026

DH5_Ant1_Hop

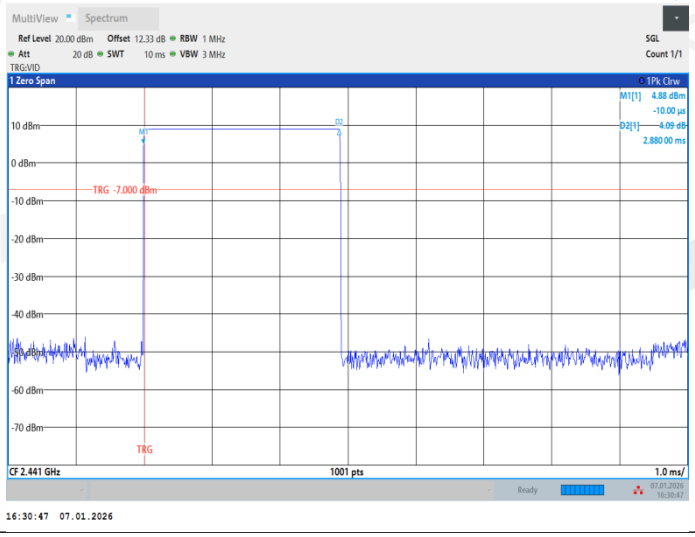
MultiView
Spectrum
Ref Level 20.00 dBm Offset 12.33 dB RBW 1 MHz
Att 20 dB SWT 10 ms VBW 3 MHz
SGL
Count 1/1
TRG/VID
1 Zero Span
1Pk Clrw
M1[1] 4.88 dBm
-10.00 µs
D2[1] -4.09 dB
2.880 00 ms
10 dBm
0 dBm
TRG -7.000 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
TRG
CF 2.441 GHz
1001 pts
1.0 ms/
Ready
16:30:47 07.01.2026

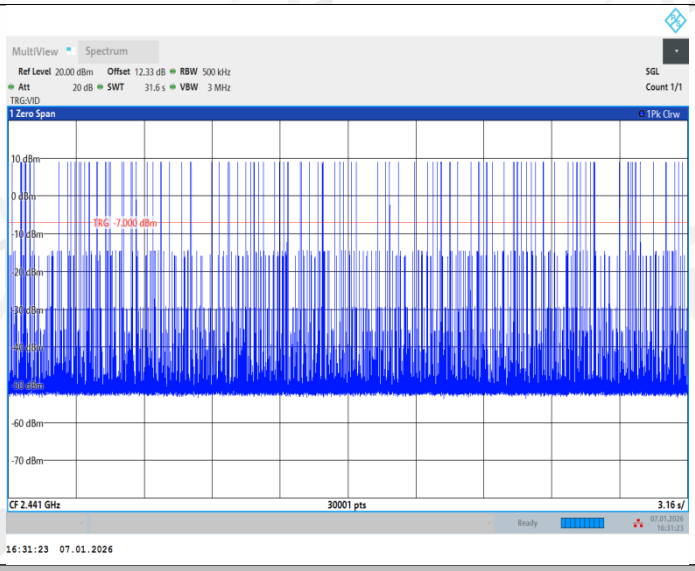

DH5_Ant2_Hop

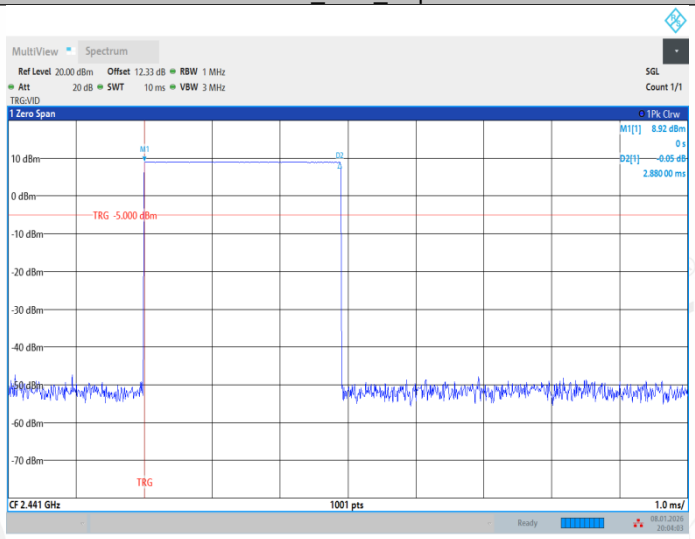

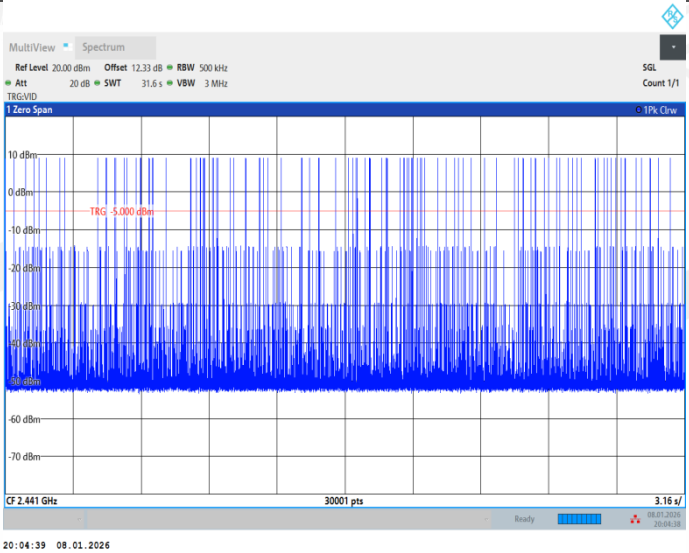

2DH1_Ant1_Hop

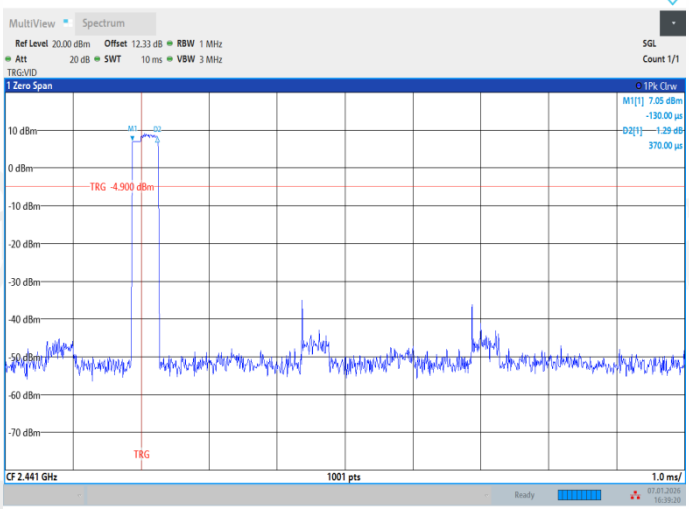

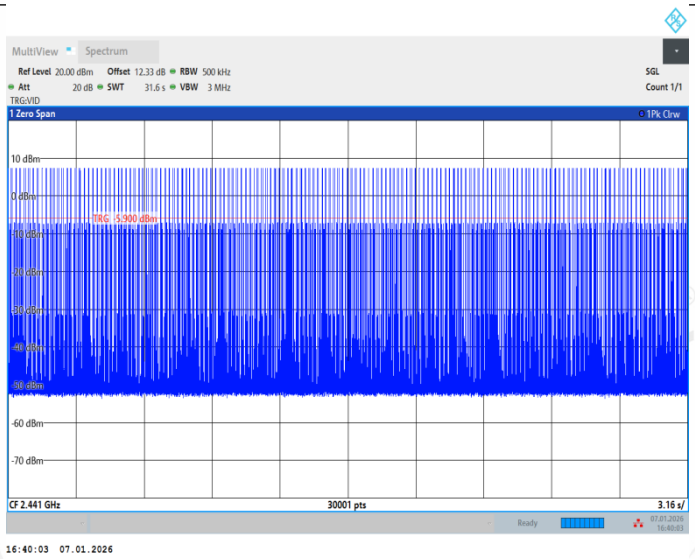

2DH1_Ant2_Hop

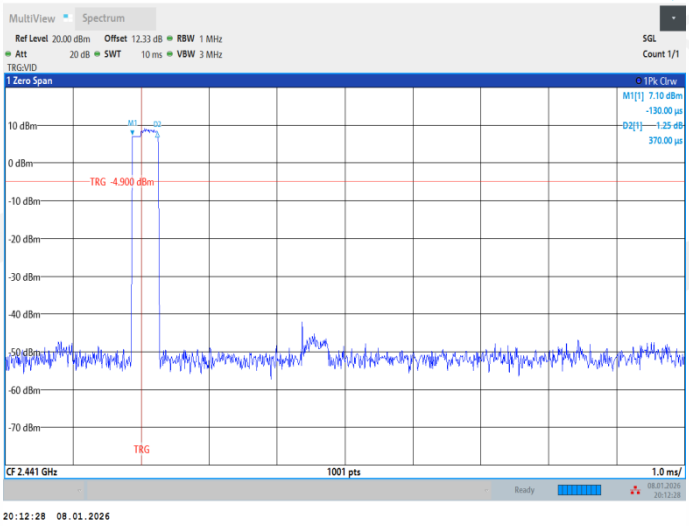

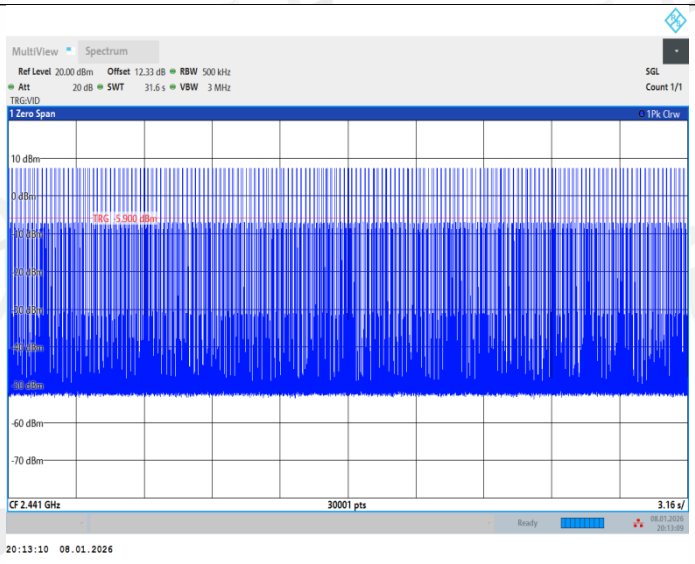

2DH3_Ant1_Hop

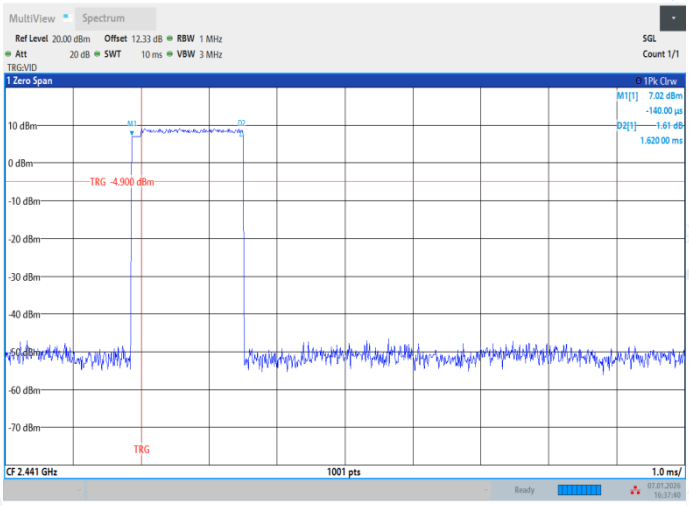

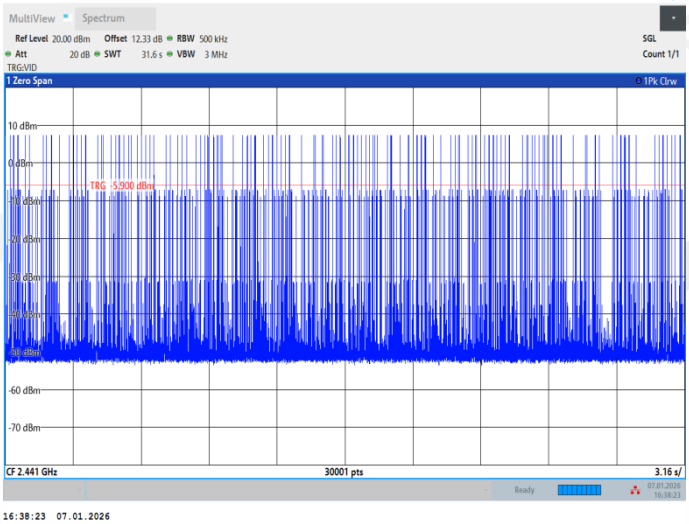

2DH3_Ant2_Hop

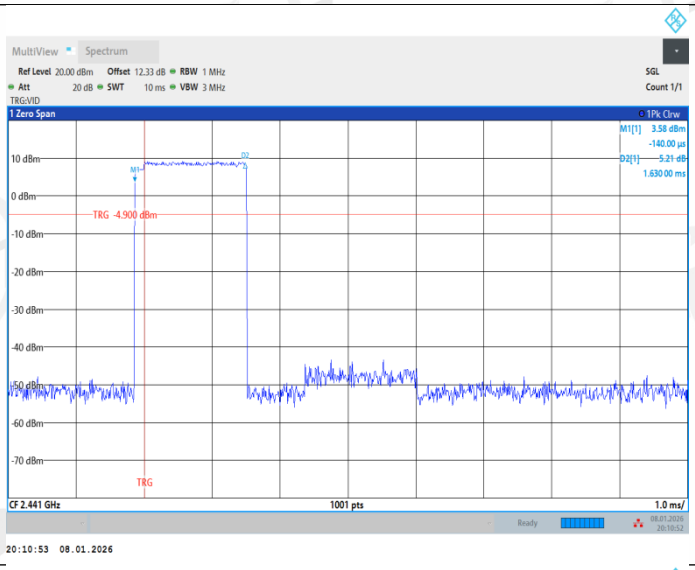

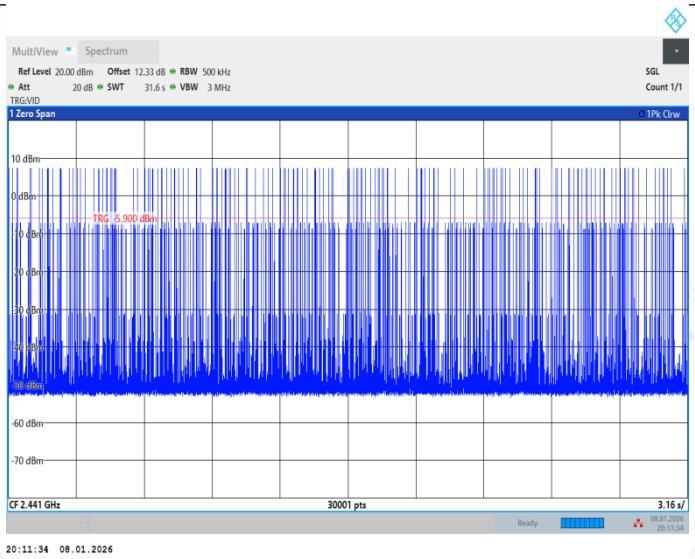

2DH5_Ant1_Hop

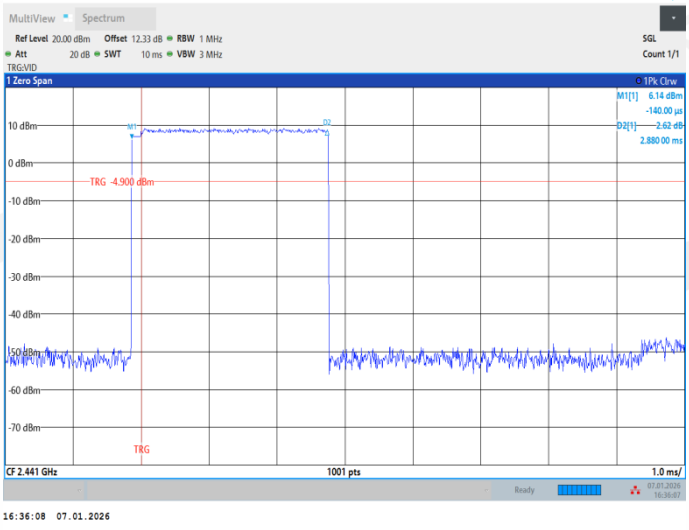

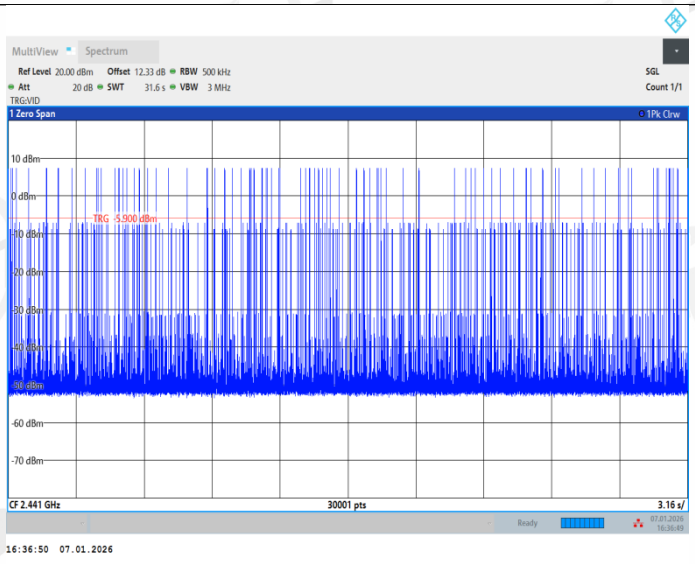

2DH5_Ant2_Hop

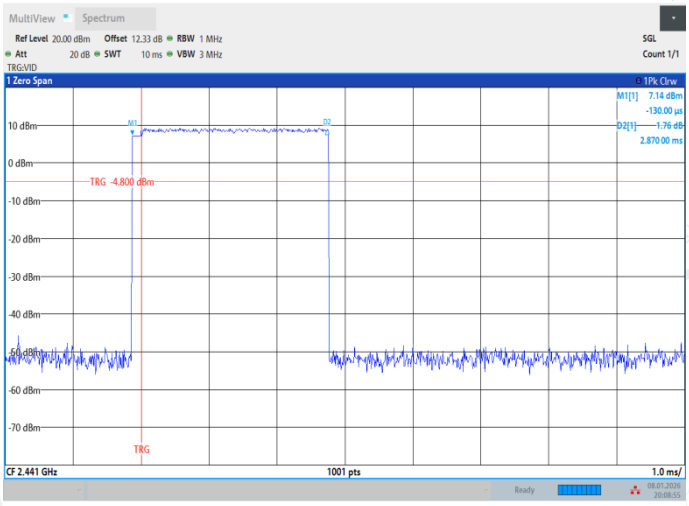

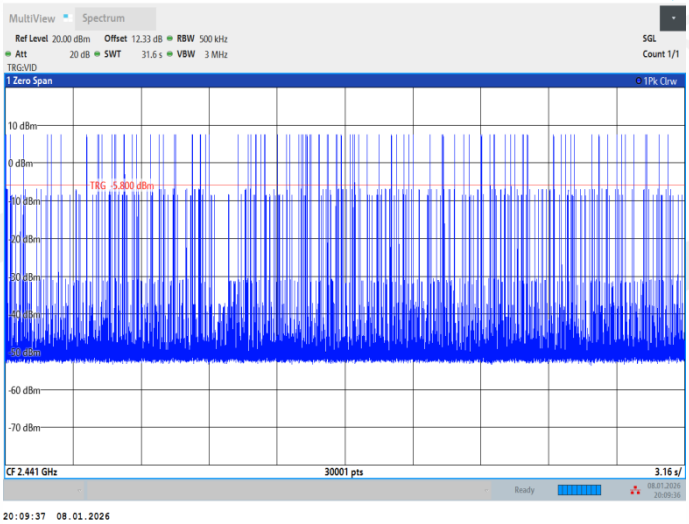

3DH1_Ant1_Hop