

Test Report

Report No.: MTi160407004RF

Date of issue: May 10, 2016

Sample Description:	Bluetooth Remote
Model(s):	RM1, RM2, RM3, RM4
Applicant:	Guangzhou FiiO Electronics Technology CO., LTD
Address:	2/F, F Building, Hougang Industrial Zone, Shigang Village, huangshi West Road, Baiyun District, Guangzhou City
Date of Test:	Apr, 11. 2016 to Apr 27, 2016

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>



This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

TABALE OF CONTENTS

1. General description.....	5
1.1 Feature of equipment under test (EUT).....	5
1.2 Operation channel list.....	5
2. Test Configuration of EUT	6
2.1 Test Frequency Channel.....	6
2.2 EUT operation mode	6
2.3 Test conditions.....	6
2.4 Testing site	6
2.5 Ancillary equipment list.....	6
2.6 Measurement uncertainty	6
3. List of test equipment	7
4. Test Result	8
4.1 Antenna requirement.....	8
4.2 Peak output power	9
4.3 20dB emission bandwidth.....	11
4.4 Carrier frequency separation	13
4.5 Number of hopping channel	15
4.6 Time of occupancy (dwell time)	16
4.7 Band edge spurious emission	17
4.8 Radiated emission.....	19

TEST RESULT CERTIFICATION	
Applicant's name:	Guangzhou FiiO Electronics Technology CO., LTD
Address:	2/F, F Building, Hougang Industrial Zone, Shigang Village, Huangshi West Road, Baiyun District, Guangzhou City
Manufacture's Name:	Guangzhou FiiO Electronics Technology CO., LTD
Address:	2/F, F Building, Hougang Industrial Zone, Shigang Village, Huangshi West Road, Baiyun District, Guangzhou City
Product description	
Product name:	Bluetooth Remote
Trademark:	FiiO
Model name:	RM1
Serial Model:	RM2, RM3, RM4
Standards:	FCC Part 15.247
Test Procedure:	ANSI C63.4-2009; ANSI C63.10-2009; FCC public notice DA 00-705

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


Tested by:



David Chen

May 10, 2016

Reviewed by:



Leon Chen

May 10, 2016

Approved by:



Ares Liu

May 10, 2016

SUMMARY OF TEST RESULT

Item	FCC Part No.	Description of Test	Result
1	15.203	Antenna requirement	Pass
2	15.207	AC power line conducted emission	N/A*
3	15.247(b)(1)	Peak output power	Pass
4	15.247(a)(1)	20dB emission bandwidth	Pass
5	15.247(a)(1)	Carrier frequency separation	Pass
6	15.247(a)1	Number of hopping channel	Pass
7	15.247(a)(1)	Time of occupancy (dwell time)	Pass
8	15.247(d)	Band edge spurious emission	Pass
9	15.247(d), 15.209	Radiated emission	Pass

* The EUT is power by battery only.

1. General description

1.1 Feature of equipment under test (EUT)

Product name:	Bluetooth Remote
Model name:	RM1
Serial Model:	RM2, RM3, RM4
Tx/Rx frequency range:	Tx/Rx: 2402MHz~2480MHz
Bluetooth version:	3.0
Modulation Type:	GFSK
Power Source:	3VDC (CR2016 battery)
Antenna Designation:	Chip antenna (Antenna Gain: 0dBi)
Remark:	All the models above are identical in interior structure, electrical circuits and components; just model names are different for marking requirement.

1.2 Operation channel list

Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz
1	2403MHz	21	2423MHz	41	2443MHz
---	---	---	---	---	---
---	---	---	---	---	---
18	2420MHz	38	2440MHz	77	2479MHz
19	2421MHz	39	2441MHz	78	2480MHz

2. Test Configuration of EUT

2.1 Test Frequency Channel

Low	2402MHz
Middle	2441MHz
High	2480MHz

2.2 EUT operation mode

During testing, RF test program provided by the manufacture to control the Transmitter operation followed the test requirement. New battery is used during all test

2.3 Test conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 20°C~30°C
- Humidity: 30%~70%
- Atmospheric pressure: 98kPa~101kPa

2.4 Testing site

Test Site	Shenzhen Toby Technology Co., Ltd.
Test Site Location	1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467
FCC Registration No.:	811562
CNAS Registration No.:	CNAS L5813

2.5 Ancillary equipment list

Equipment	Model	S/N	Manufacturer
/	/	/	/

2.6 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree
Humidity	± 5 %

3. List of test equipment

For AC power line conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
LISN	R&S	ENV216	101313	2016.12.06
LISN	SCHWARZBECK	NNLK 8129	8129245	2016.12.25
Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	2016.12.25
Test Cable	N/A	N/A	C01	2016.12.06
EMI Test Receiver	R&S	ESCI	101160	2016.12.06

For Radiated emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Log-Bicon Antenna	MESS-ELEKTRO NIK	VULB 9160	3058	2016.12.11
Horn Antenna	Schwarzbeck	BBHA 9120D	631	2016.12.05
Horn Antenna	Schwarzbeck	BBHA 9170	373	2016.12.05
Test Cable	United Microwave	57793	1m	2016.12.05
Test Cable	United Microwave	A30A30-5006	10m	2016.12.05
Microwave Pre_amplifier	Agilent	8449B	3008A01714	2016.12.05
Pre-Amplifier	Anritsu	MH648A	M09961	2016.12.05
EMI Test Receiver	R&S	ESCI-7	101318	2016.12.05
Spectrum analyzer	Agilent	E4470B	MY41441082	2016.06.01

For RF conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Spectrum analyzer	Agilent	E4470B	MY41441082	2016.06.01

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4. Test Result


4.1 Antenna requirement

4.1.1 Requirement defined in FCC 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.1.2 EUT antenna description

The Bluetooth antenna of EUT is an internal permanently attached antenna which the maximum gain is 0dBi. So the antenna meets the requirement of this part.

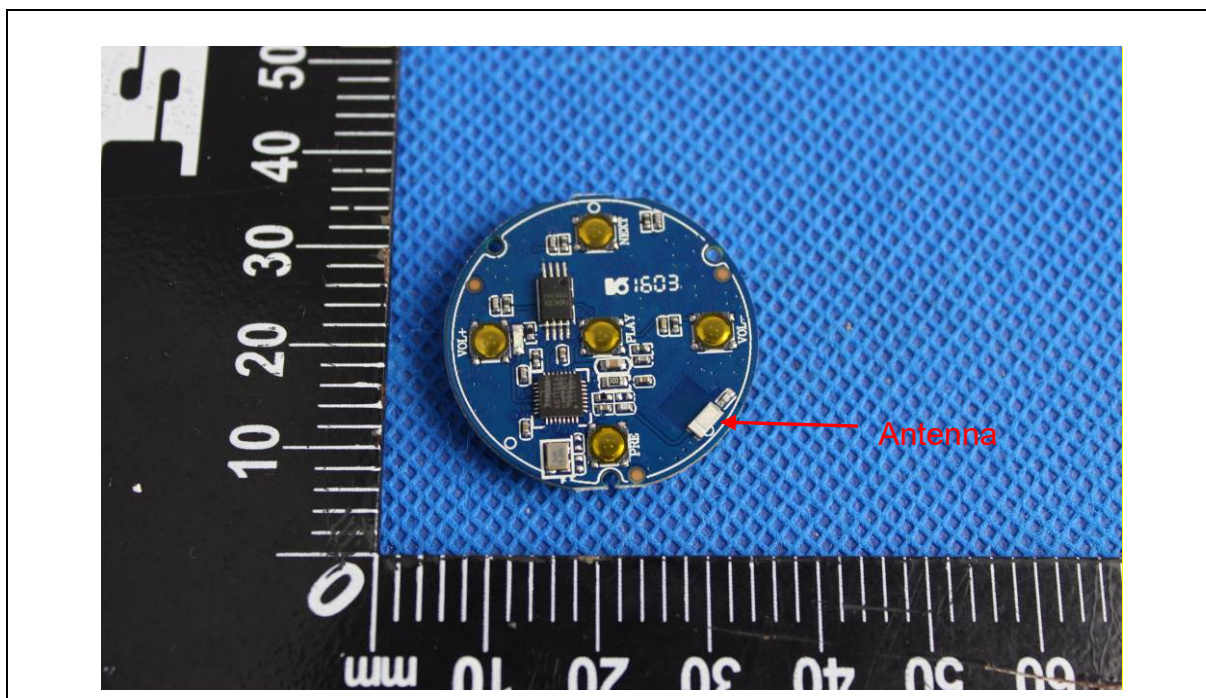

4.2 Peak output power

4.2.1 Limits

Conducted peak output power limit is 125mW (21dBm)

4.2.2 Test Method

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.

4.2.3 Test Result


Frequency (MHz)	Peak output power (dBm)	Limit (dBm)
2402	-3.078	21
2441	-3.262	21
2480	-3.559	21

Test plots as below


2402MHz

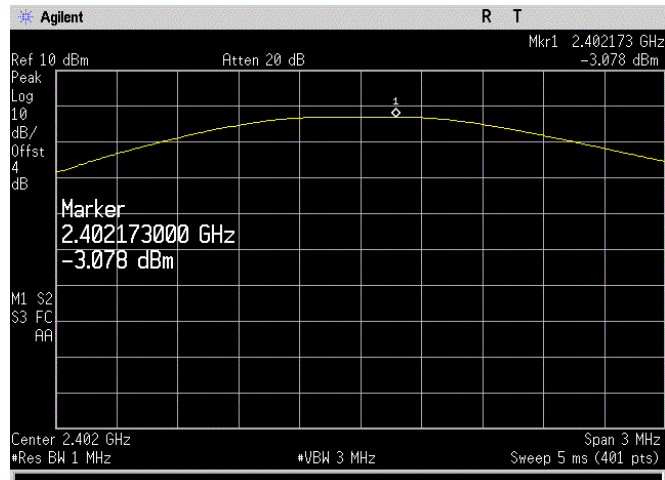

2441MHz

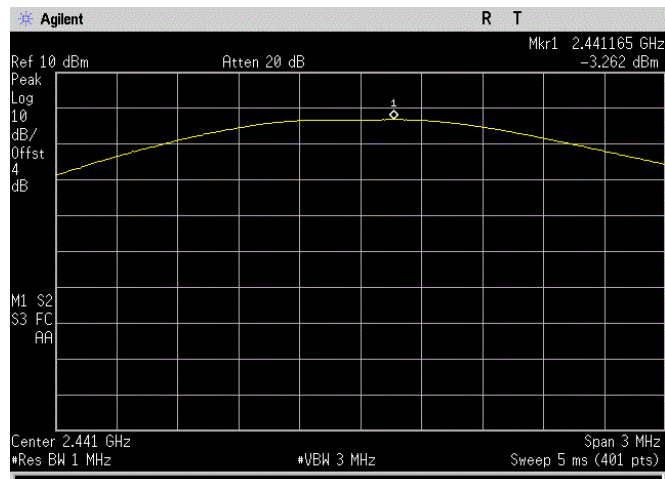

2480MHz

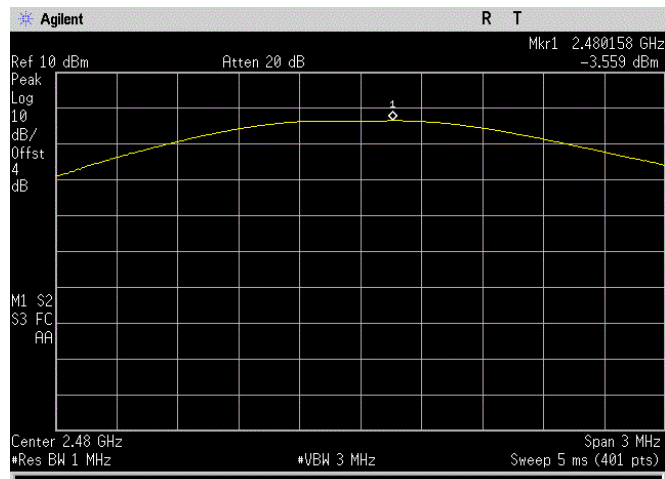

4.3 20dB emission bandwidth

4.3.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

4.3.2 Test result


Frequency (MHz)	20dB emission bandwidth (MHz)
2402	0.868
2441	0.869
2480	0.872

Test plots as below:


2402MHz

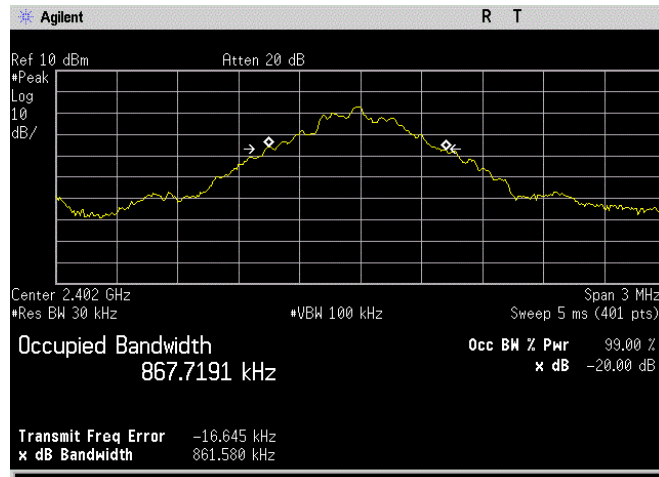

2441MHz

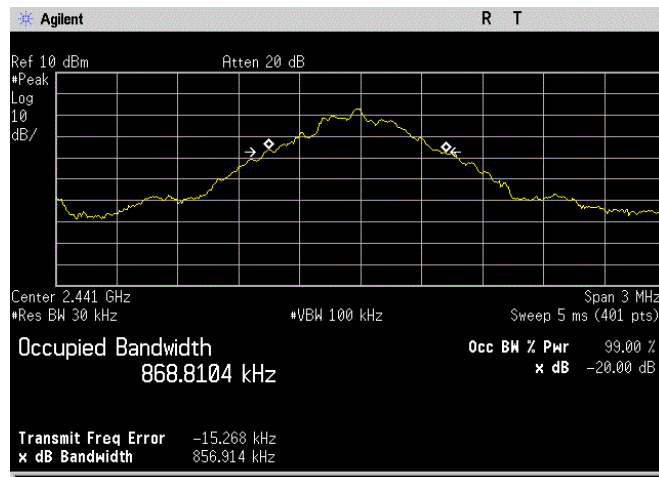

2480MHz

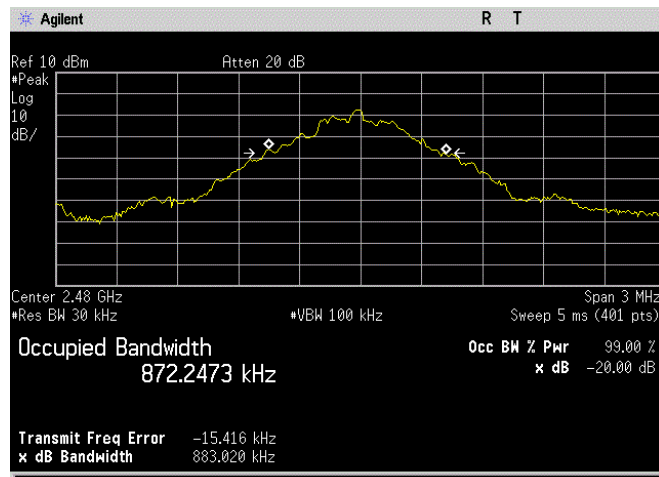

4.4 Carrier frequency separation

4.4.1 Limits

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.4.2 Test method

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

4.4.3 Test result


Frequency (MHz)	Separation (MHz)	Limit (MHz)
2402	1.05	0.581
2441	1.05	0.581
2480	1.05	0.581

Test plots as below:


2402MHz

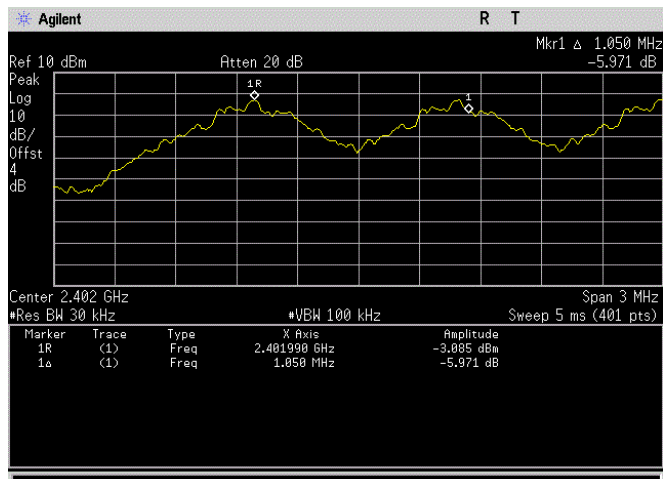

2441MHz

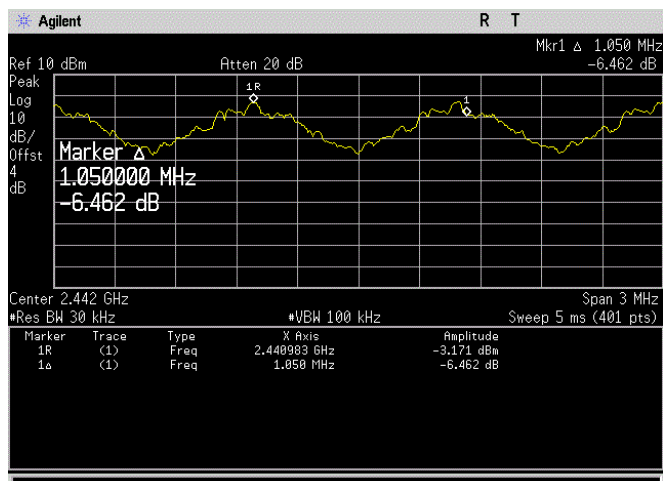

2480MHz

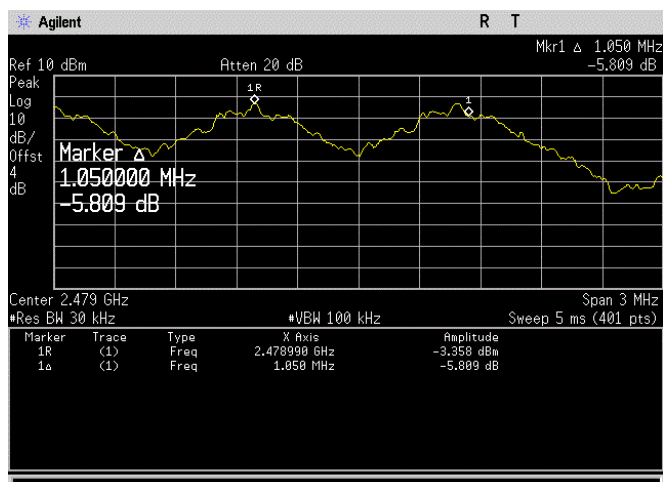

4.5 Number of hopping channel

4.5.1 Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

4.5.2 Test method

The EUT must have its hopping function enabled. Use the following spectrum analyser settings:

Span = the frequency band of operation

RBW $\geq 1\%$ of the span

VBW $\geq$ RBW


Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It

4.5.3 Test Result

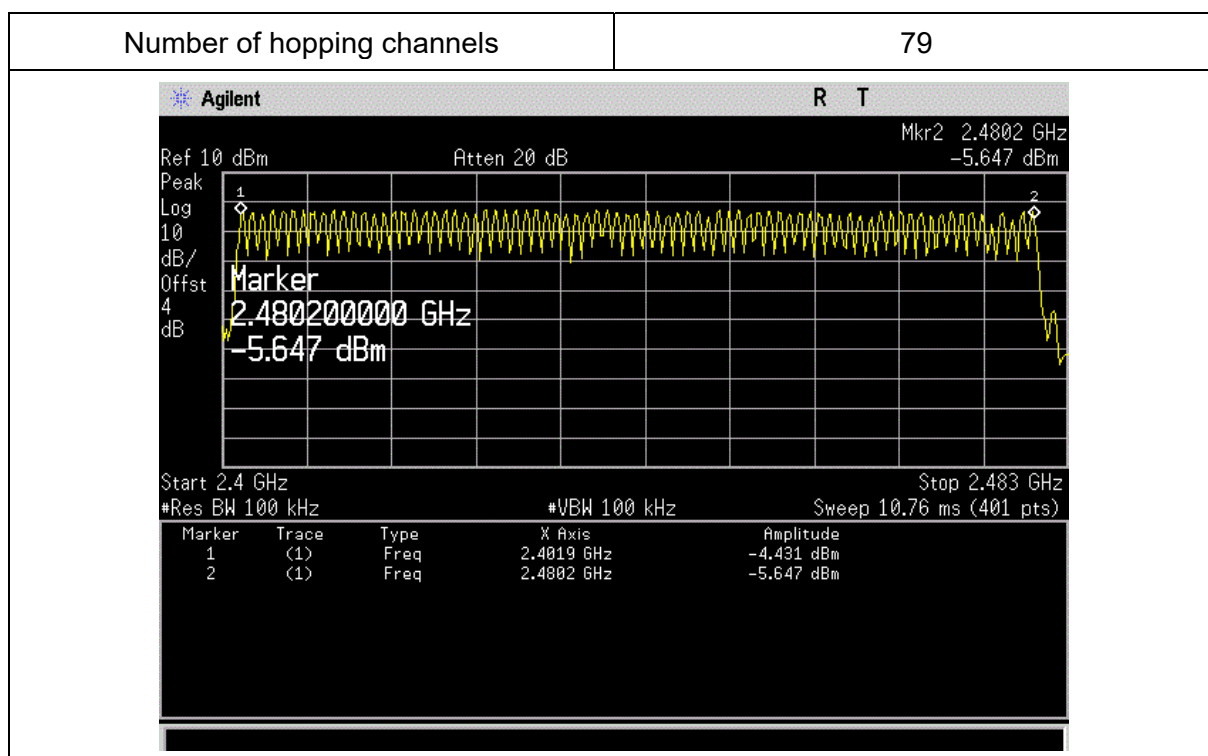

4.6 Time of occupancy (dwell time)

4.6.1 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.6.2 Test method

The EUT must have its hopping function enabled. Use the following spectrum analyser settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW $\geq$ RBW


Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the dwell time.

4.6.3 Test Result

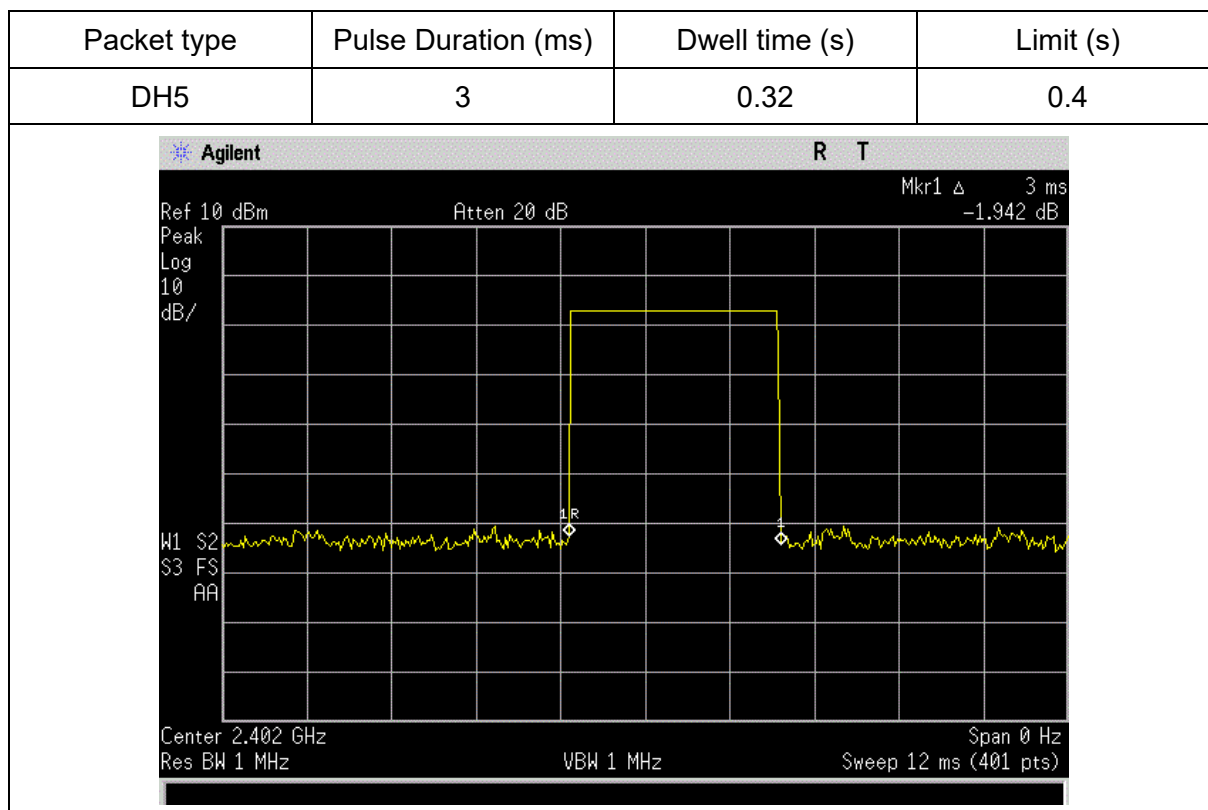

Note: for the worst mode of DH5 packet type, in normal hopping mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channel

4.7 Band edge spurious emission

4.7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

4.7.2 Test method


Use the following spectrum analyser settings:

Set RBW=100 kHz. VBW $\geq$ 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.

4.7.3 Test Result

Test plots as below:

Band edge

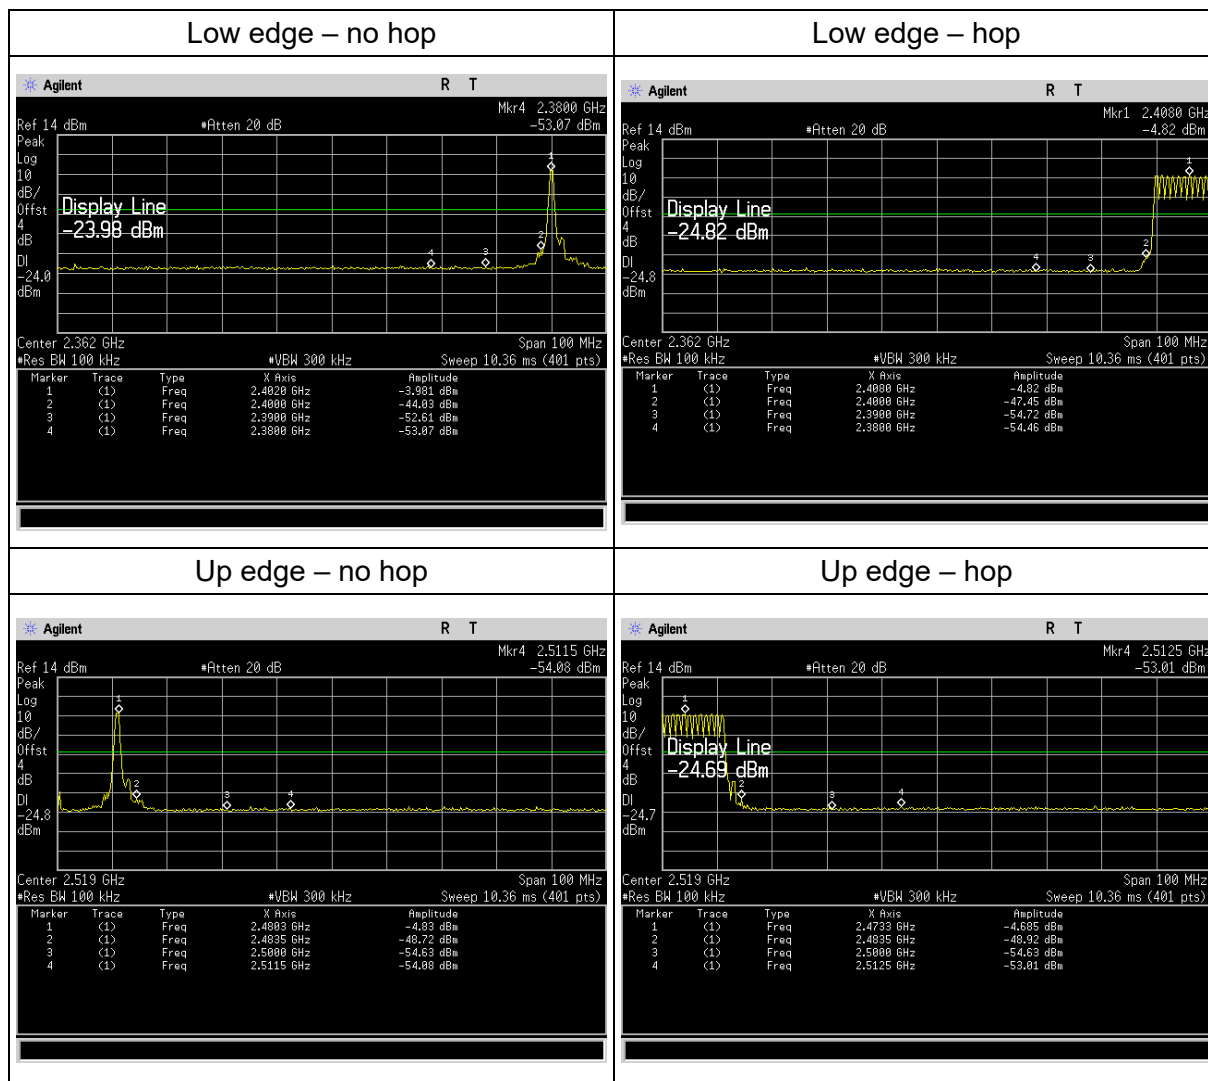

4.8 Radiated emission

4.8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Field strength $\mu\text{V/m}$	Field strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance
30-88	100	40	QP	3m
88-216	150	43.5	QP	
216-960	200	46	QP	
960-1000	500	46	QP	
Above 1000	500	54	AV	
Above 1000	5000	74	PK	

4.8.2 Test method

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
3. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold

4. Follow the guidelines in ANSI C63.4-2009 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{duty cycle}/100\text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

6. The three orthogonal axis (x, y, z) are pre-tested, only the worst emissions were reported

4.8.3 Test Result

Transmitter channel: 2402MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
255.43	V	20.3	46	QP	Pass
255.43	H	19.6	46	QP	
2390	V	46.18	74	PK	
2390	H	46.34	74	PK	
4804	V	50.29	74	PK	
4804	H	50.11	74	PK	
Transmitter channel: 2441MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
255.43	V	20.9	46	QP	Pass
255.43	H	20.1	46	QP	
4882	V	50.36	74	PK	
4882	H	51.06	74	PK	
Transmitter channel: 2480MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
255.43	V	19.5	46	QP	
255.43	H	19.6	46	QP	
2483.5	V	46.85	74	PK	
2483.5	H	45.79	74	PK	
4960	V	51.36	74	PK	
4960	H	51.98	74	PK	

Note:

QP Emission Level= Antenna Factor +Cable Loss + Reading

PK Emission Level= Antenna Factor +Cable Loss - Amp. Factor + Reading

AV Emission Level= PK Emission Level+20log (duty cycle) or set the RBW/VBW to be 1MHz/10Hz to read the level.

If the PK measured values lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.

----END OF REPORT----