

ATTACHMENT O – SAR TEST PLOTS -2/2-

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM850/ Channel : 190 (Body)
Liquid Temperature : 21.8 °C
Ambient Temperature : 22.1 °C
Date Tested : August 28, 2006

DUT: C1100 ; Type: Folder; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.991$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

GSM Body 190/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.065 mW/g

GSM Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 7.62 V/m; Power Drift = -0.178 dB

Peak SAR (extrapolated) = 0.088 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.039 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.061 mW/g

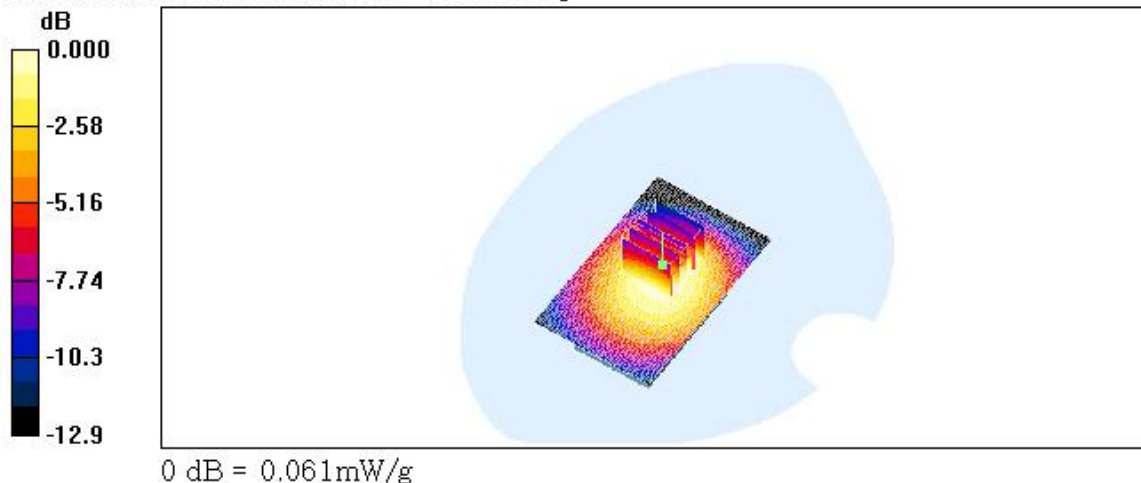

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM850(Front)/ Channel : 190(Body)
Liquid Temperature : 21.8 °C
Ambient Temperature : 22.1 °C
Date Tested : August 28, 2006

DUT: C1100 ; Type: Folder; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.991$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

GSM Body 190/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.010 mW/g

GSM Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 3.31 V/m; Power Drift = -0.651 dB

Peak SAR (extrapolated) = 0.012 W/kg

SAR(1 g) = 0.00937 mW/g; SAR(10 g) = 0.00683 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.010 mW/g

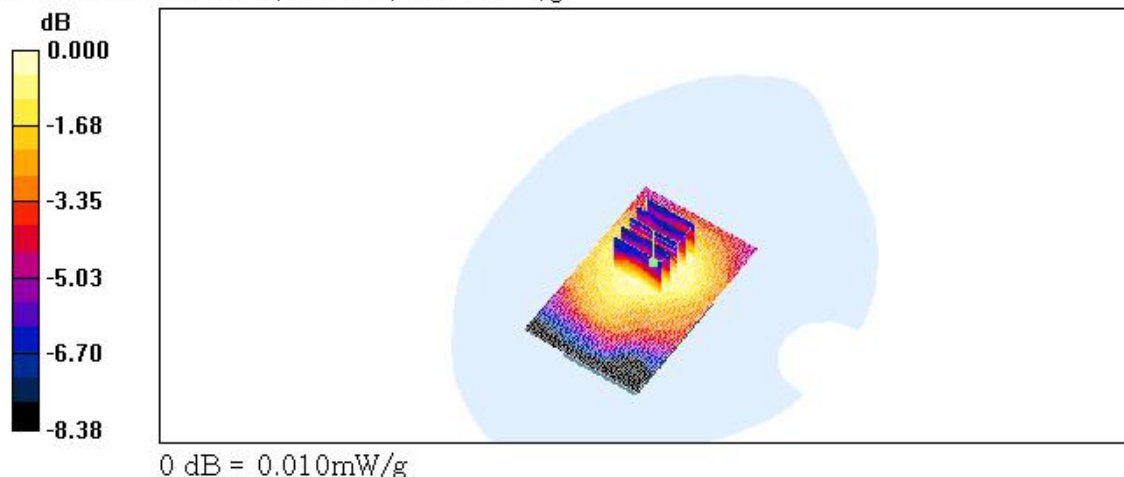

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900/ Channel : 661 (Body)
Liquid Temperature : 21.8 °C
Ambient Temperature : 22.1 °C
Date Tested : August 28, 2006

DUT: C1100 ; Type: Folder; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 661/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 0.050 mW/g


PCS Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 5.82 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.073 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

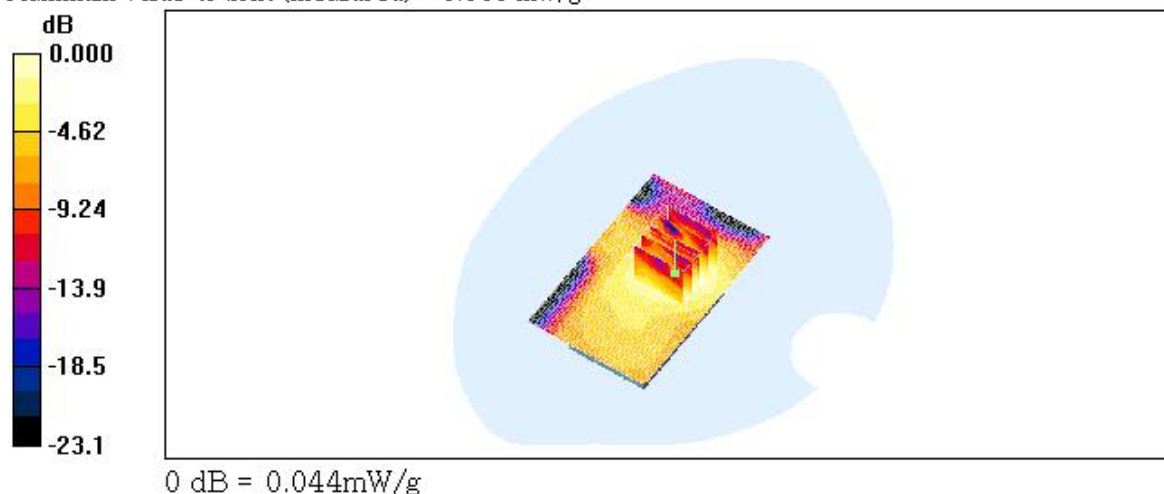

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900(Front)/ Channel : 661(Body)
Liquid Temperature : 21.8 °C
Ambient Temperature : 22.1 °C
Date Tested : August 28, 2006

DUT: C1100 ; Type: Folder; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 661/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.018 mW/g


PCS Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.50 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 0.038 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00664 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

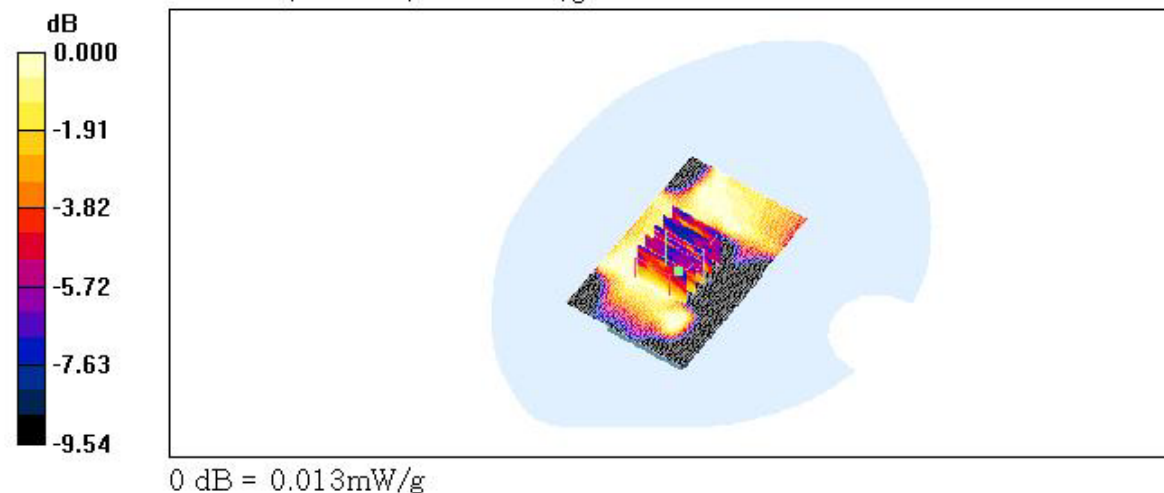

Test Laboratory: HCT

Company : Newgen Telecom. co., Ltd
Mode : GSM850/ Channel : 251
Liquid Temperature : 21.8 °C
Ambient Temperature : 22.1 °C
Date Tested : August 28, 2006


DUT: C1100; Type: Folder; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 850$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.29, 6.29, 6.29); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right Touch 251/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm
Maximum value of SAR (measured) = 0.305 mW/g

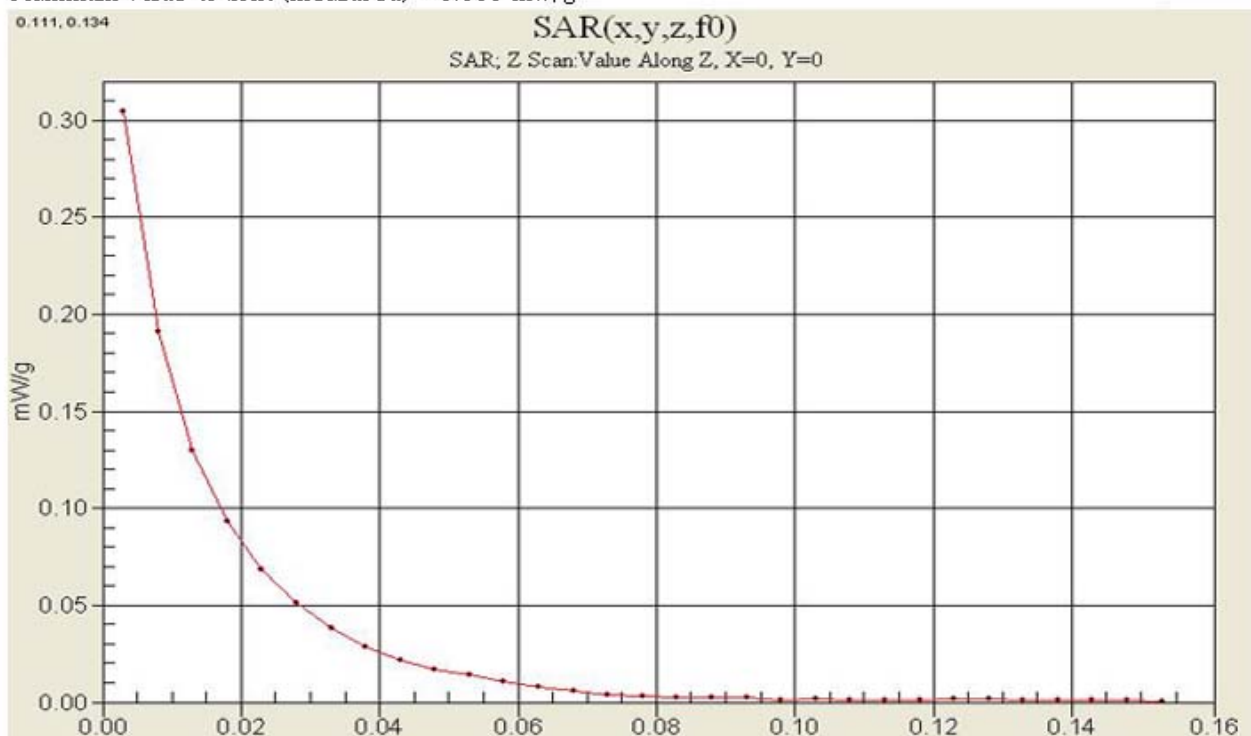

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900/ Channel : 512
Liquid Temperature : 21.8 °C
Ambient Temperature : 22.1 °C
Date Tested : August 28, 2006

DUT: C1100; Type: Folder; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44


DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right Touch 512/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.789 mW/g

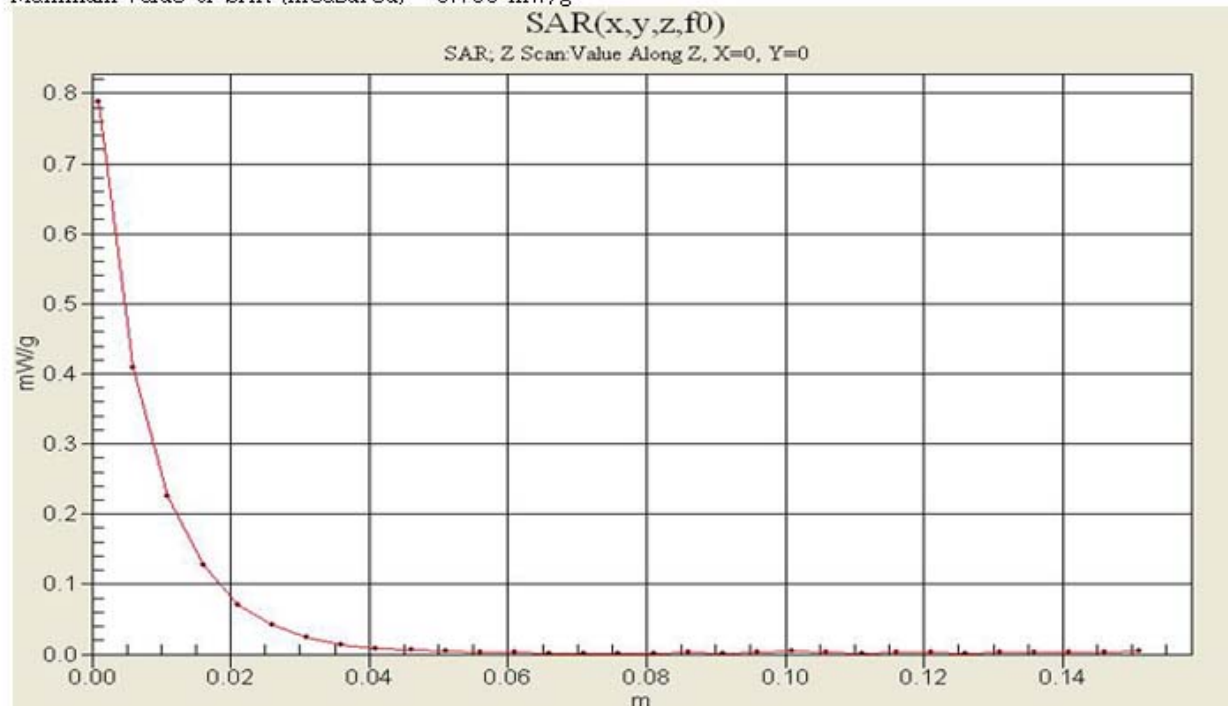

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM850(Body) / Channel : 190(GPRS)
Liquid Temperature : 21.6 °C
Ambient Temperature : 21.9 °C
Date Tested : October 26, 2006

DUT: C1100 ; Type: Folder; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.42, 6.42, 6.42); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn479; Calibrated: 2006-02-23
- Phantom: SAM 835/900 MHz; Type: SAM

GSM Body 190/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.055 mW/g

GSM Body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 7.30 V/m; Power Drift = -0.232 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.025 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.053 mW/g

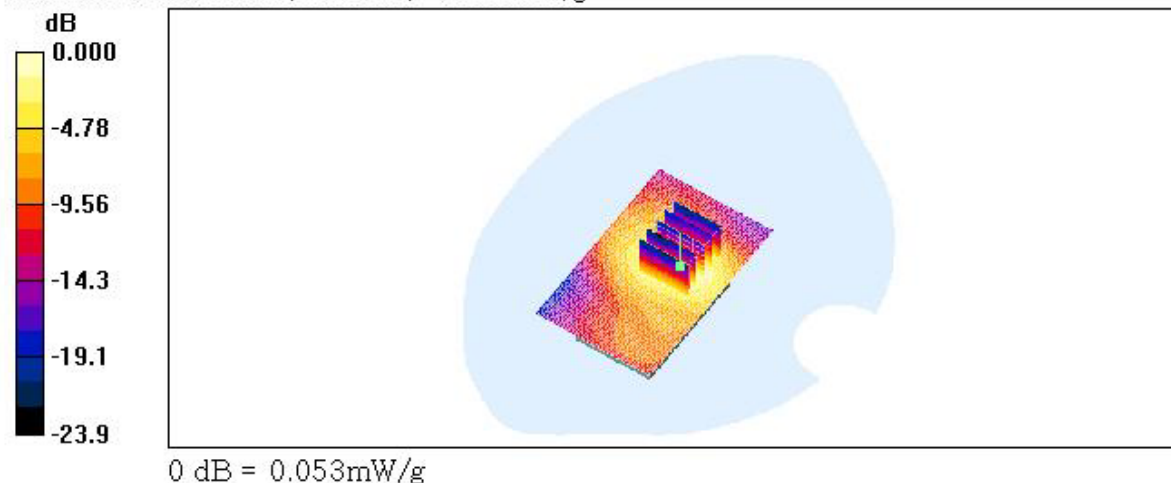

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900(Body) / Channel : 661 (GPRS)
Liquid Temperature : 21.6 °C
Ambient Temperature : 21.9 °C
Date Tested : October 26, 2006

DUT: C1100 ; Type: Folder; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(4.63, 4.63, 4.63); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn479; Calibrated: 2006-02-23
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 661/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm
Maximum value of SAR (interpolated) = 0.041 mW/g

PCS Body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 5.45 V/m; Power Drift = -0.127 dB
Peak SAR (extrapolated) = 0.061 W/kg
SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.019 mW/g
Maximum value of SAR (measured) = 0.037 mW/g

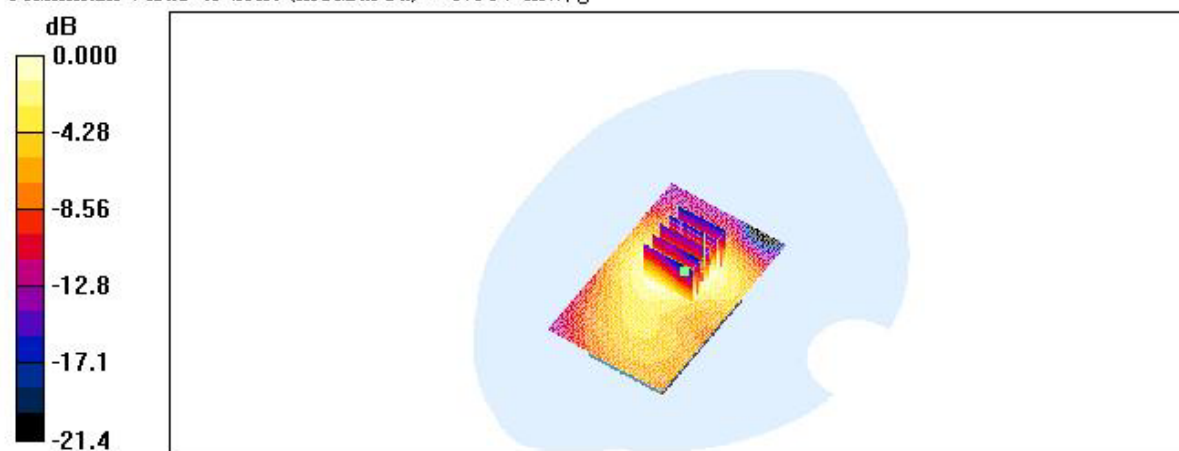

0 dB = 0.037mW/g