

ATTACHMENT O – SAR TEST PLOTS (1 of 2)

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 512
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 38.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 512/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.307 mW/g

Left touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.8 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.153 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.314 mW/g

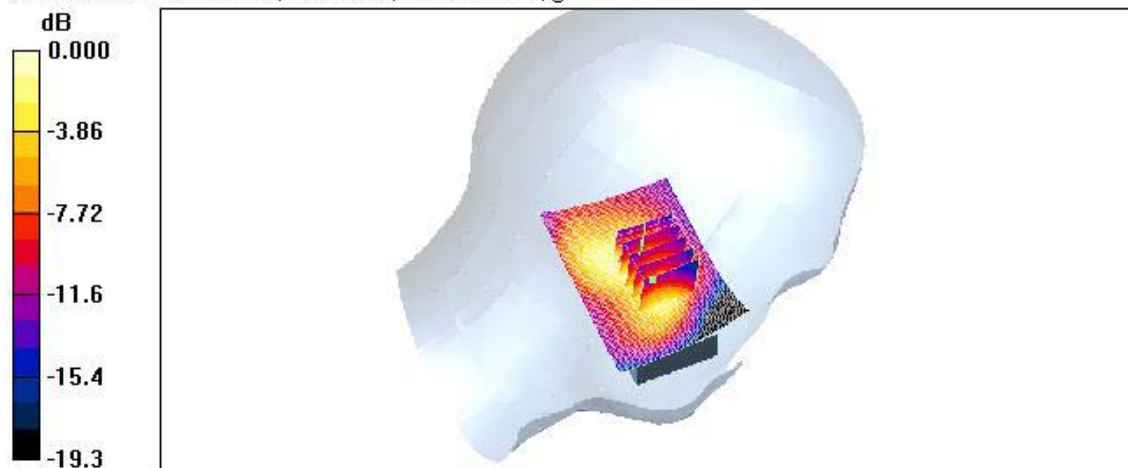

0 dB = 0.314mW/g

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 661
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 661/Area Scan (51x71x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.303 mW/g


Left touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 10.7 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.303 mW/g

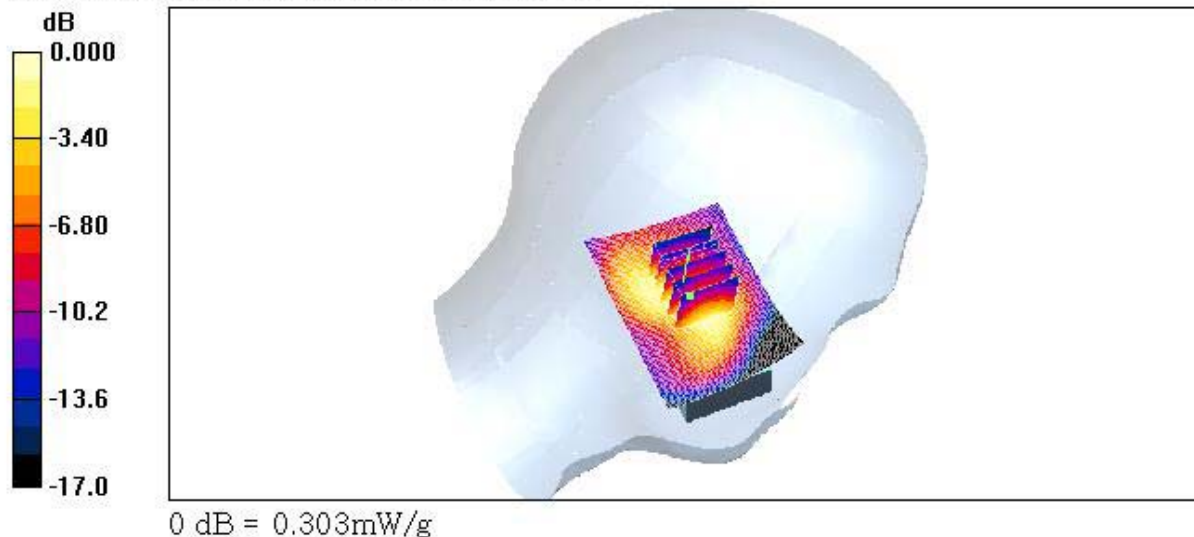

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 810
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1


Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 810/Area Scan (51x71x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.272 mW/g

Left touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 10.2 V/m; Power Drift = -0.009 dB
Peak SAR (extrapolated) = 0.434 W/kg
SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.150 mW/g
Maximum value of SAR (measured) = 0.292 mW/g

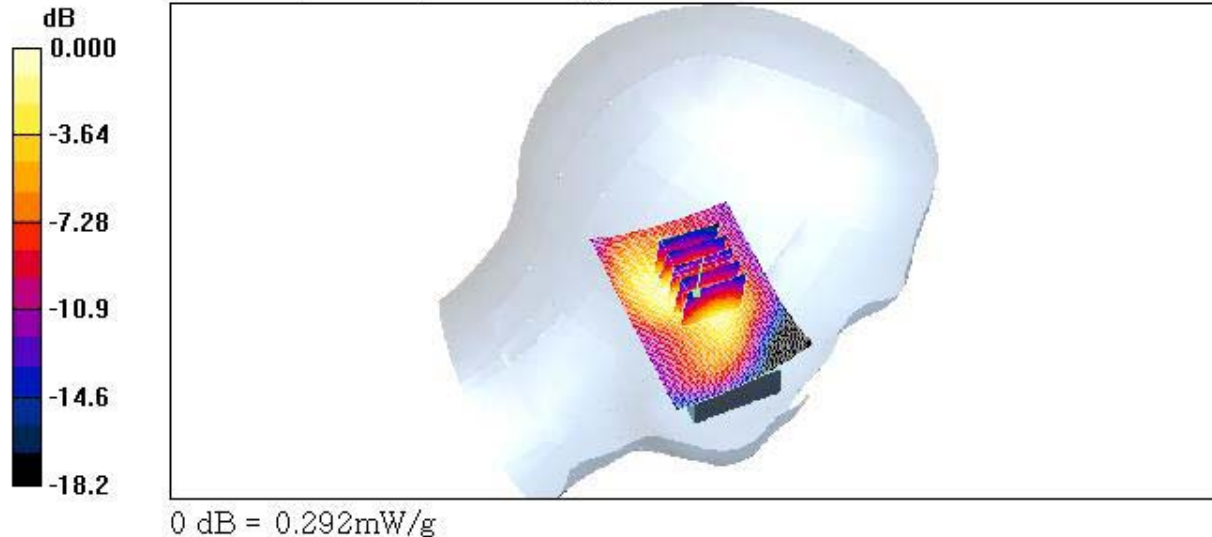

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 512
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (51x71x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.287 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 10.0 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.153 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.320 mW/g

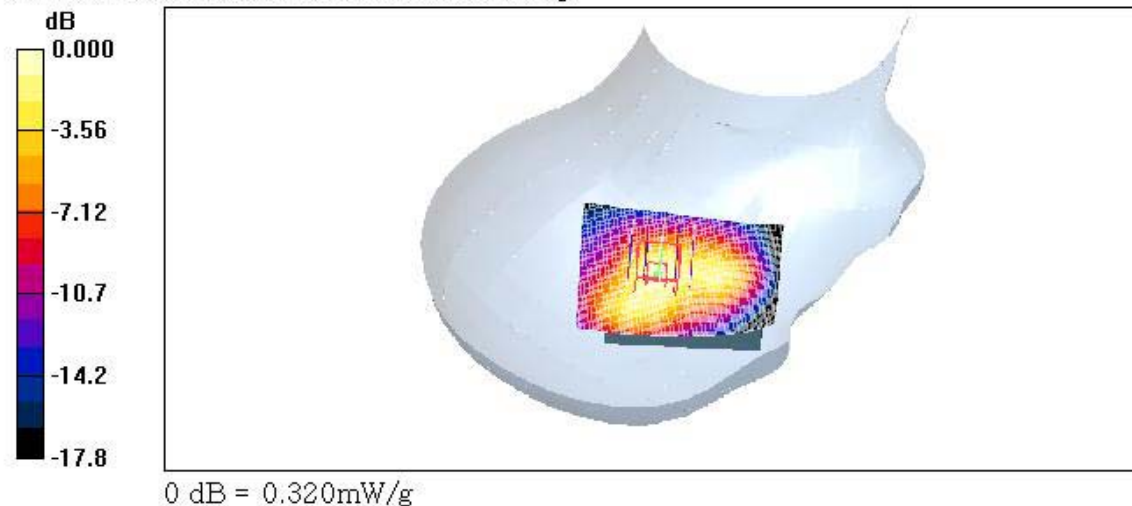

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 661
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (51x71x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm
Maximum value of SAR (interpolated) = 0.300 mW/g

Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 9.81 V/m; Power Drift = -0.017 dB
Peak SAR (extrapolated) = 0.476 W/kg
SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.156 mW/g
Maximum value of SAR (measured) = 0.334 mW/g

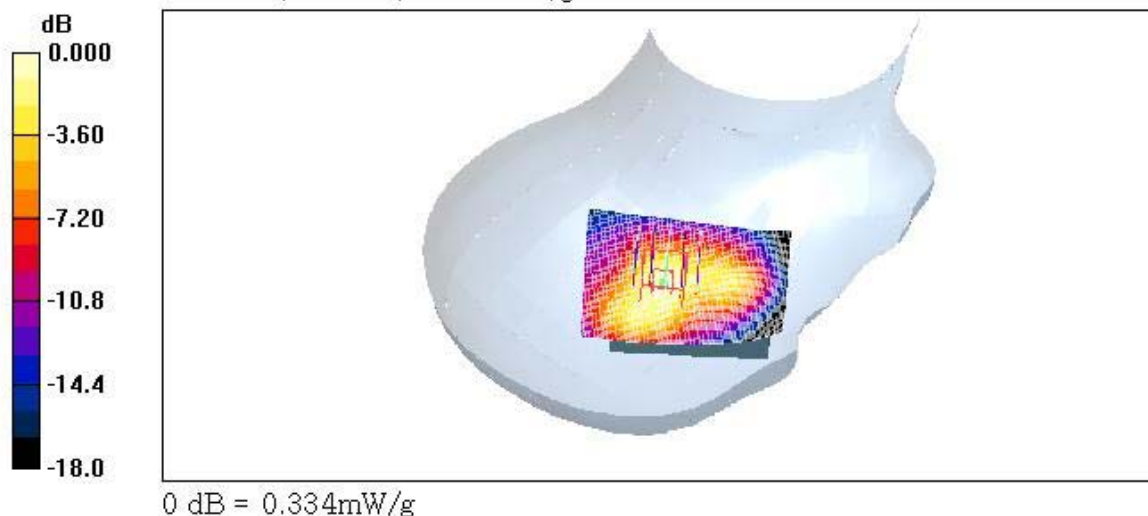

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 810
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (51x71x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.279 mW/g


Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.26 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

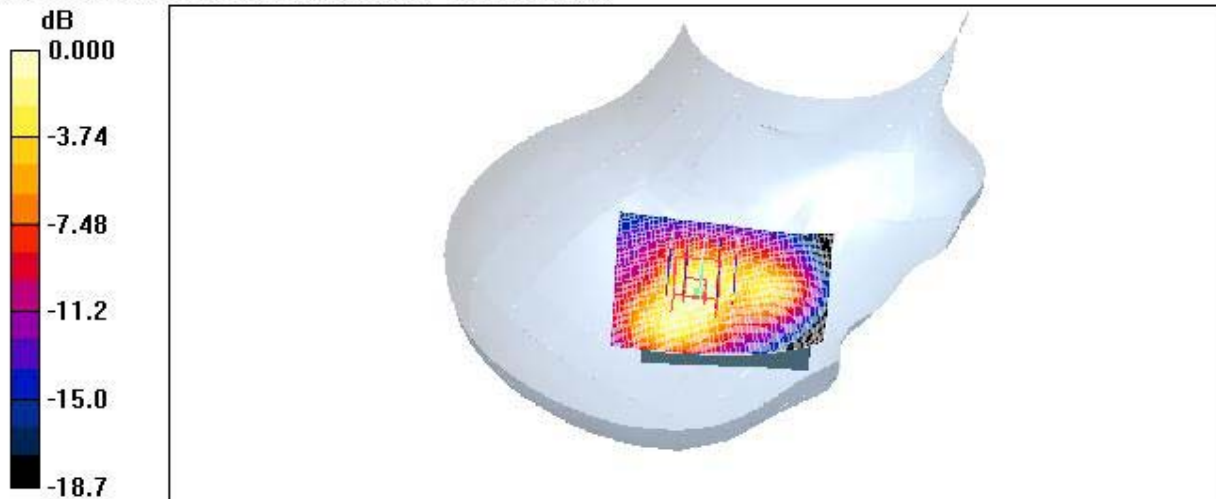

0 dB = 0.330mW/g

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 661
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 661/Area Scan (51x71x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.213 mW/g

Left tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 11.2 V/m; Power Drift = -0.038 dB
Peak SAR (extrapolated) = 0.315 W/kg
SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.119 mW/g
Maximum value of SAR (measured) = 0.218 mW/g

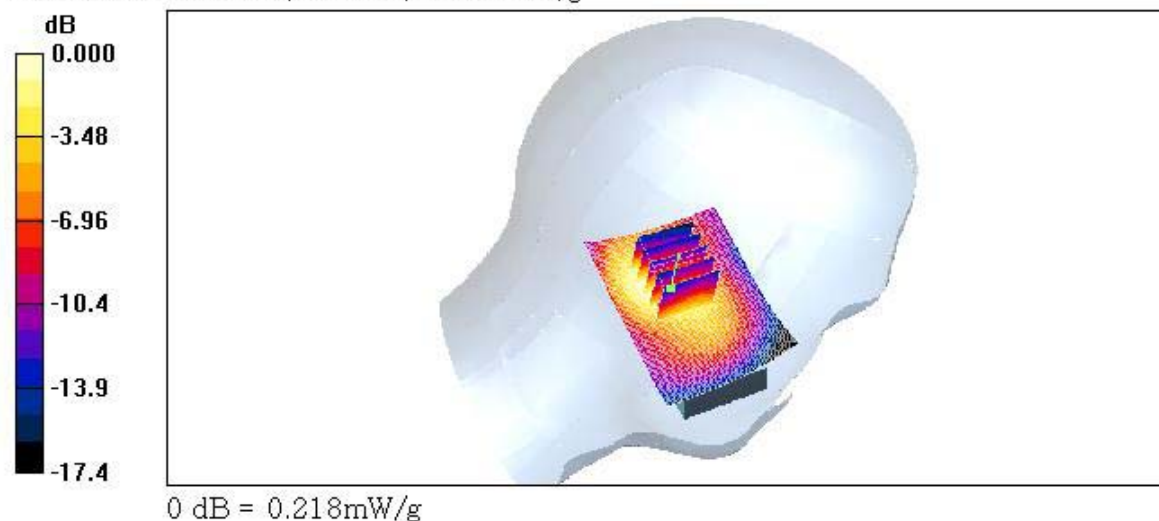

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 661
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 661/Area Scan (51x71x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$
Maximum value of SAR (interpolated) = 0.207 mW/g

Right tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$
Reference Value = 10.4 V/m; Power Drift = 0.014 dB
Peak SAR (extrapolated) = 0.310 W/kg
SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.110 mW/g
Maximum value of SAR (measured) = 0.214 mW/g

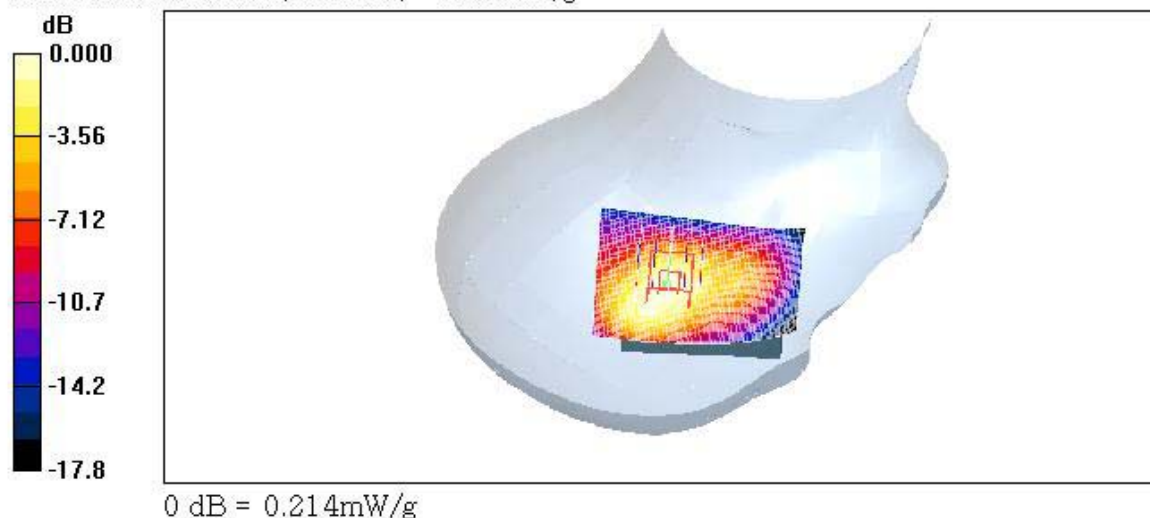

Test Laboratory: HCT

Company : Newgen Telecom co., Ltd
Mode : GSM1900 / Channel : 661
Liquid Temperature : 21.5 °C
Ambient Temperature : 21.8 °C
Date Tested : July 04, 2006

DUT: E1300; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm
Maximum value of SAR (measured) = 0.294 mW/g

