


ATTACHMENT O – SAR TEST PLOTS (2 of 3)

N551

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
 Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.42 \text{ mho/m}$, $\epsilon_r = 39.6$, $\rho = 1.00 \text{ g/cm}^3$
 Cube 5x5x7: SAR (1g): 0.810 mW/g, SAR (10g): 0.425 mW/g
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Powerdrift: 0.06 dB
 Comment:
 MODEL : N551
 Company : Newgen Telecom Co.,Ltd
 Test Position: Left Touch / Antenna: Fixed
 Mode: GSM1900 / Channel : 512
 Liquid Temperature: 21.6°C
 Date Tested : March 17, 2005

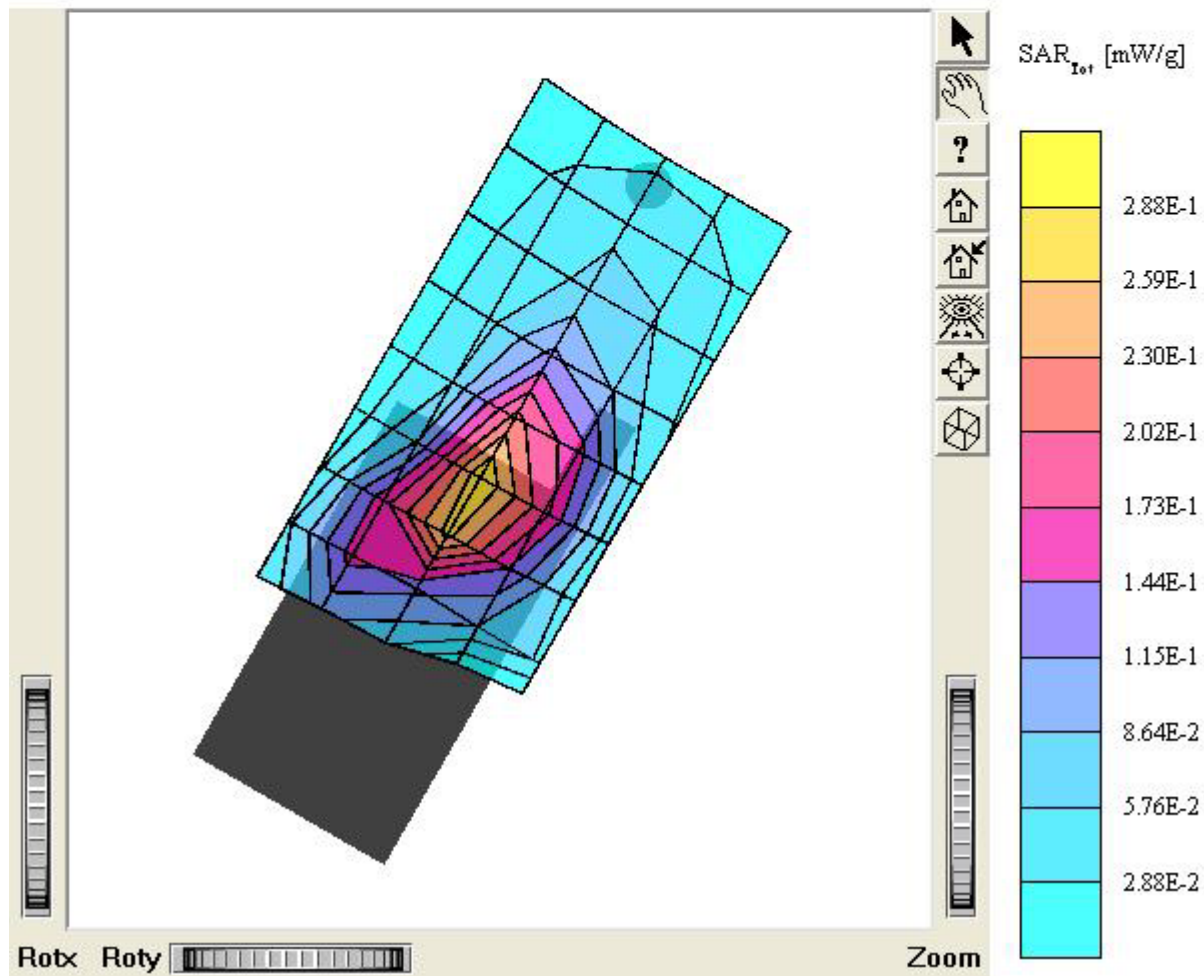

N551

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.42 \text{ mho/m}$ $\epsilon_r = 39.6$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR(1g): 0.781 mW/g, SAR(10g): 0.407 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.11 dB

Comment:

MODEL : N551


Company : Newgen Telecom Co.,Ltd

Test Position: Left Touch / Antenna: Fixed

Mode: GSM1900 / Channel : 661

Liquid Temperature: 21.6°C

Date Tested : March 17, 2005

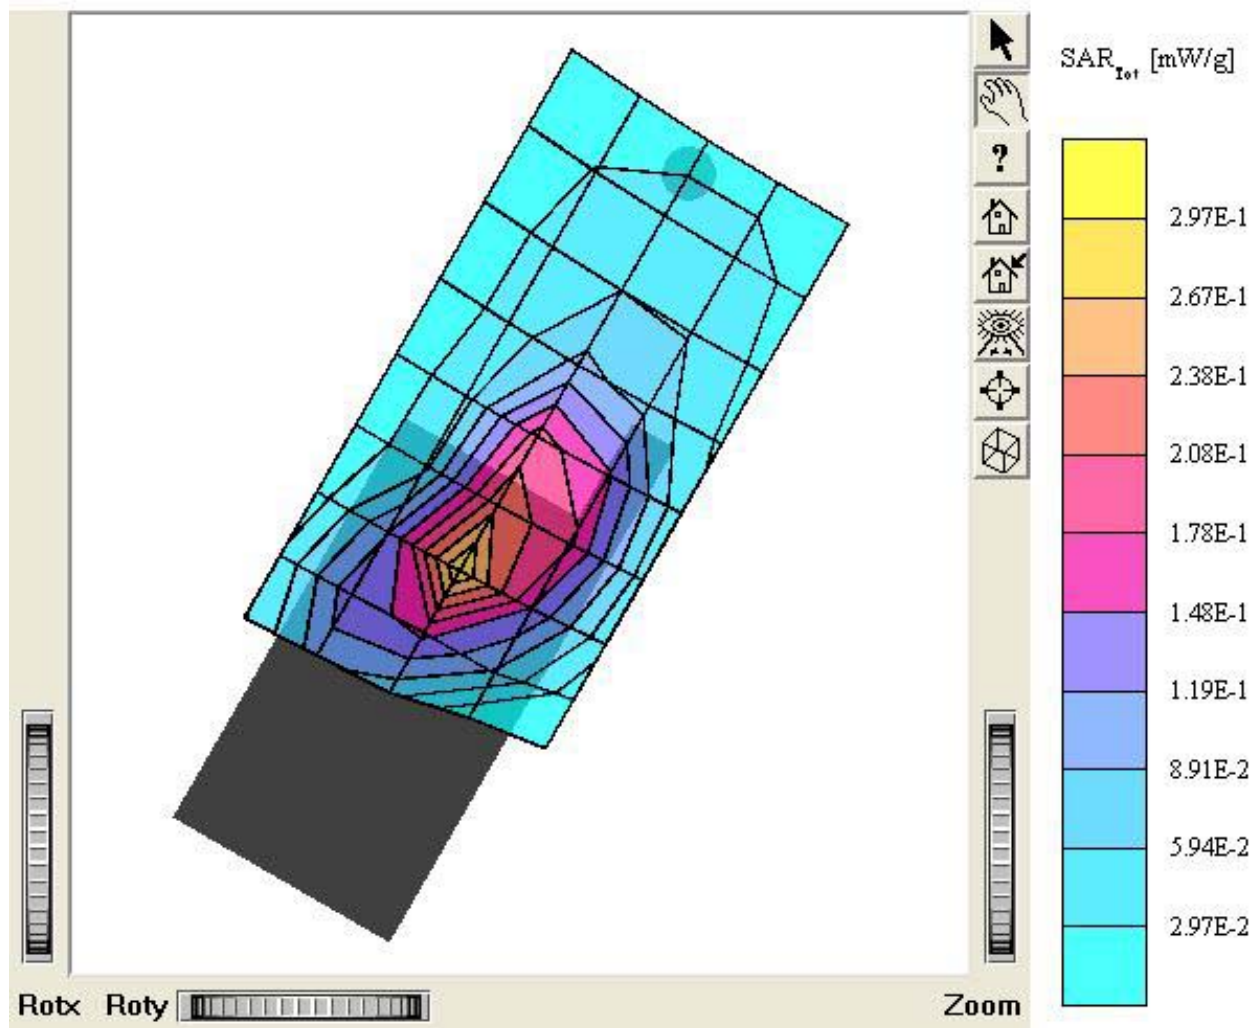

N551

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.42 \text{ mho/m}$, $\epsilon_r = 39.6$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR(1g): 0.791 mW/g, SAR(10g): 0.409 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.07 dB

Comment:

MODEL : N551


Company : Newgen Telecom Co.,Ltd

Test Position: Left Touch / Antenna: Fixed

Mode: GSM1900 / Channel : 810


Liquid Temperature: 21.6°C

Date Tested : March 17, 2005

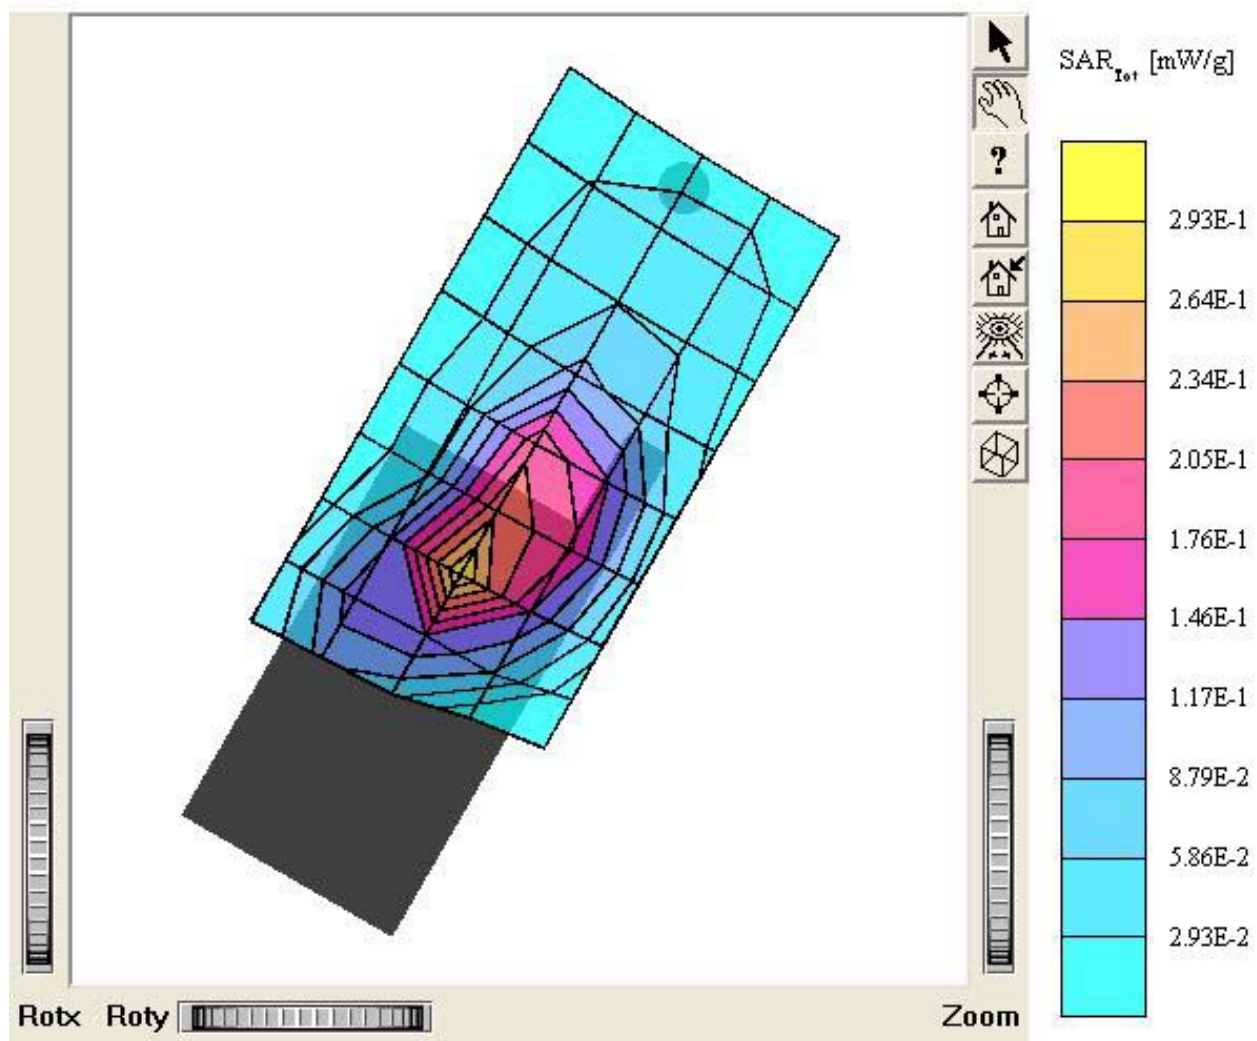

N551

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.42 \text{ mho/m}$ $\epsilon_r = 39.6$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.952 mW/g, SAR (10g): 0.509 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.02 dB
Comment:
MODEL : N551
Company : Newgen Telecom Co.,Ltd
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 512
Liquid Temperature: 21.6°C
Date Tested : March 17, 2005

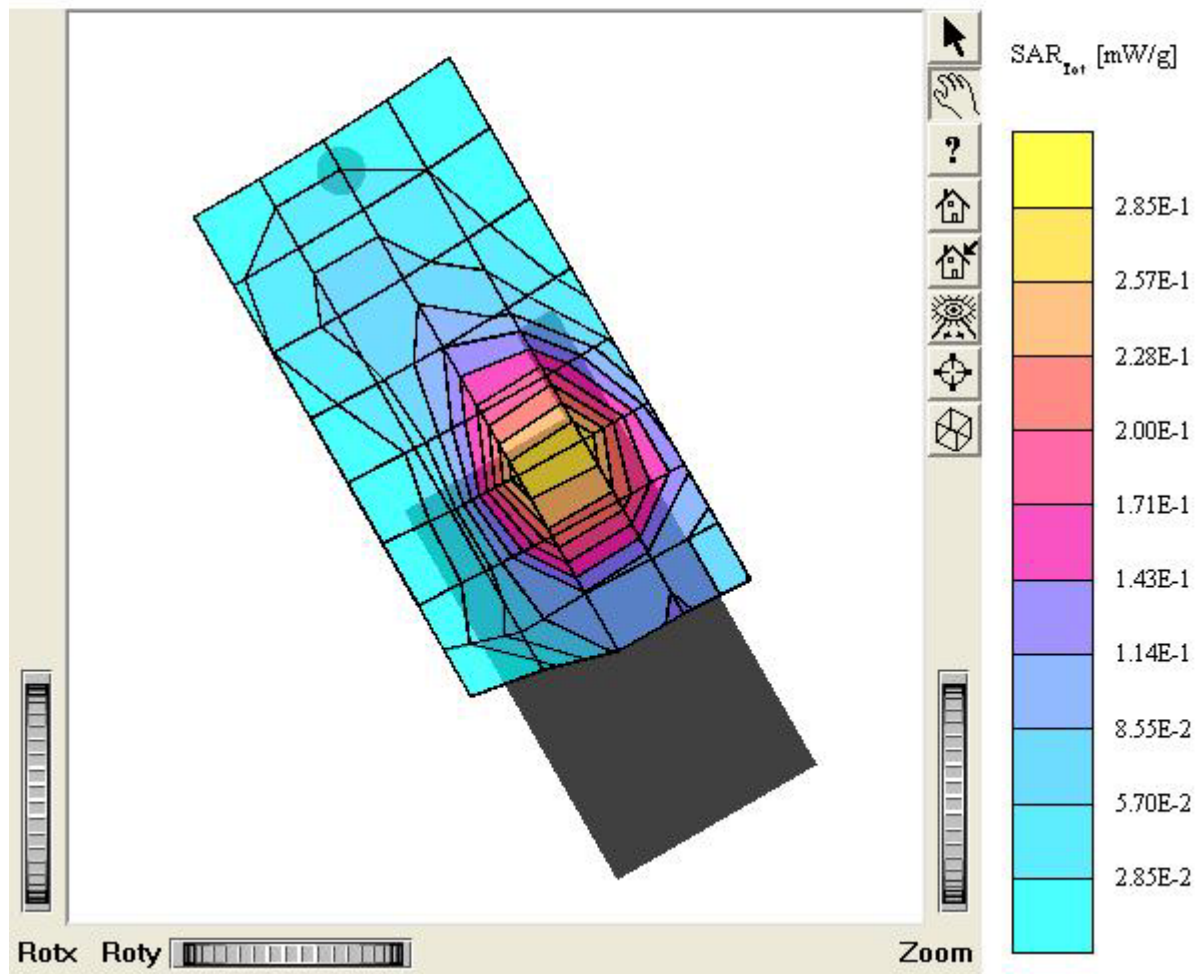

N551

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.42 \text{ mho/m}$ $\epsilon_r = 39.6$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.938 mW/g, SAR (10g): 0.501 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.25 dB

Comment:

MODEL : N551


Company : Newgen Telecom Co.,Ltd

Test Position: Right Touch / Antenna: Fixed

Mode: GSM1900 / Channel : 661

Liquid Temperature: 21.6°C

Date Tested : March 17, 2005

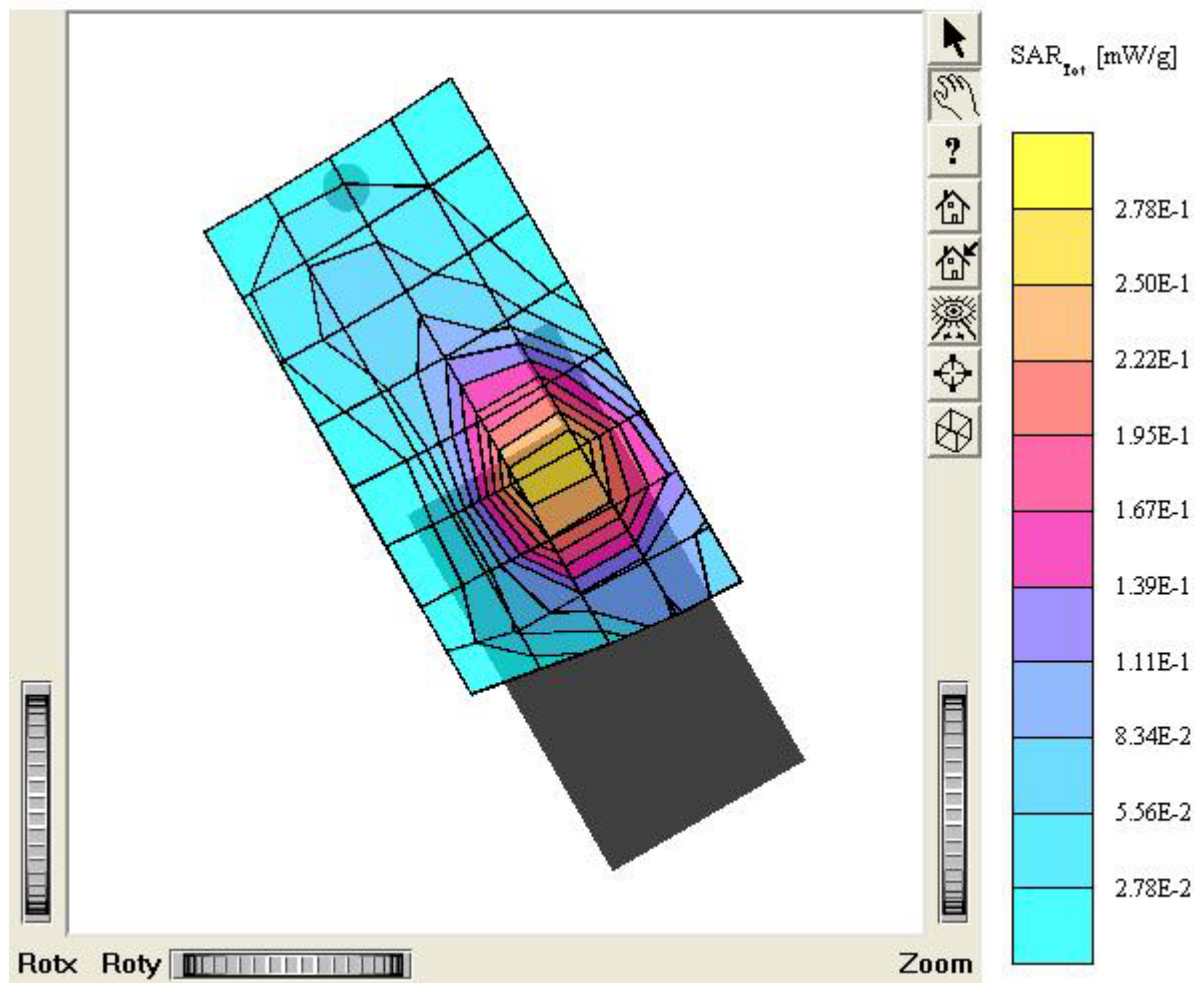

N551

SAM II Phantom, Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.42 \text{ mho/m}$ $\epsilon_r = 39.6 \rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.968 mW/g, SAR (10g): 0.522 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.01 dB

Comment:

MODEL : N551


Company : Newgen Telecom Co.,Ltd

Test Position: Right Touch / Antenna: Fixed

Mode: GSM1900 / Channel : 810

Liquid Temperature: 21.6°C

Date Tested : March 17, 2005

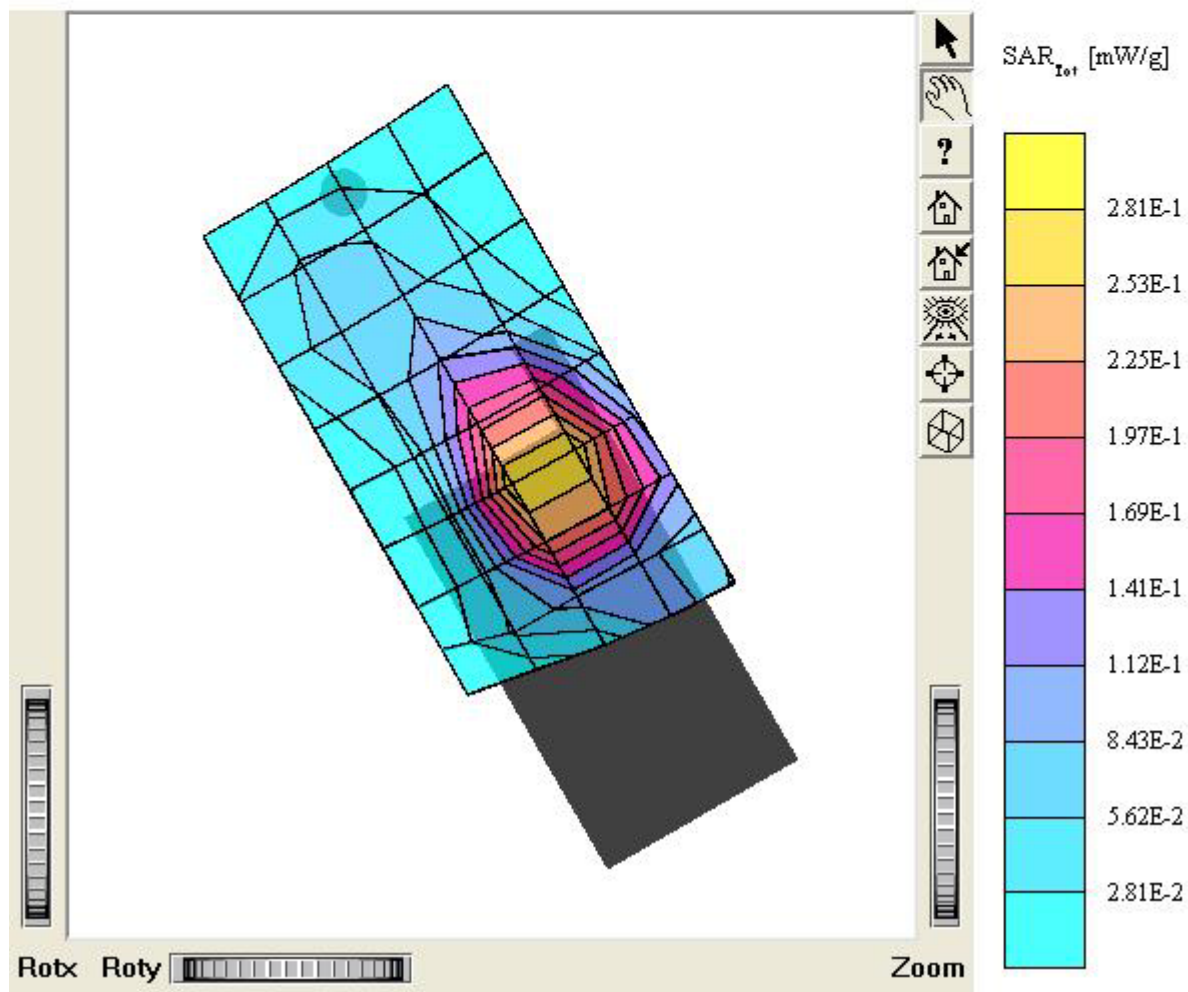

N551

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.42 \text{ mho/m}$ $\epsilon_r = 39.6$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.111 mW/g, SAR (10g): 0.0685 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.06 dB

Comment:

MODEL : N551


Company : Newgen Telecom Co.,Ltd

Test Position: Left Tilt / Antenna: Fixed

Mode: GSM1900 / Channel : 661

Liquid Temperature: 21.6°C

Date Tested : March 17, 2005

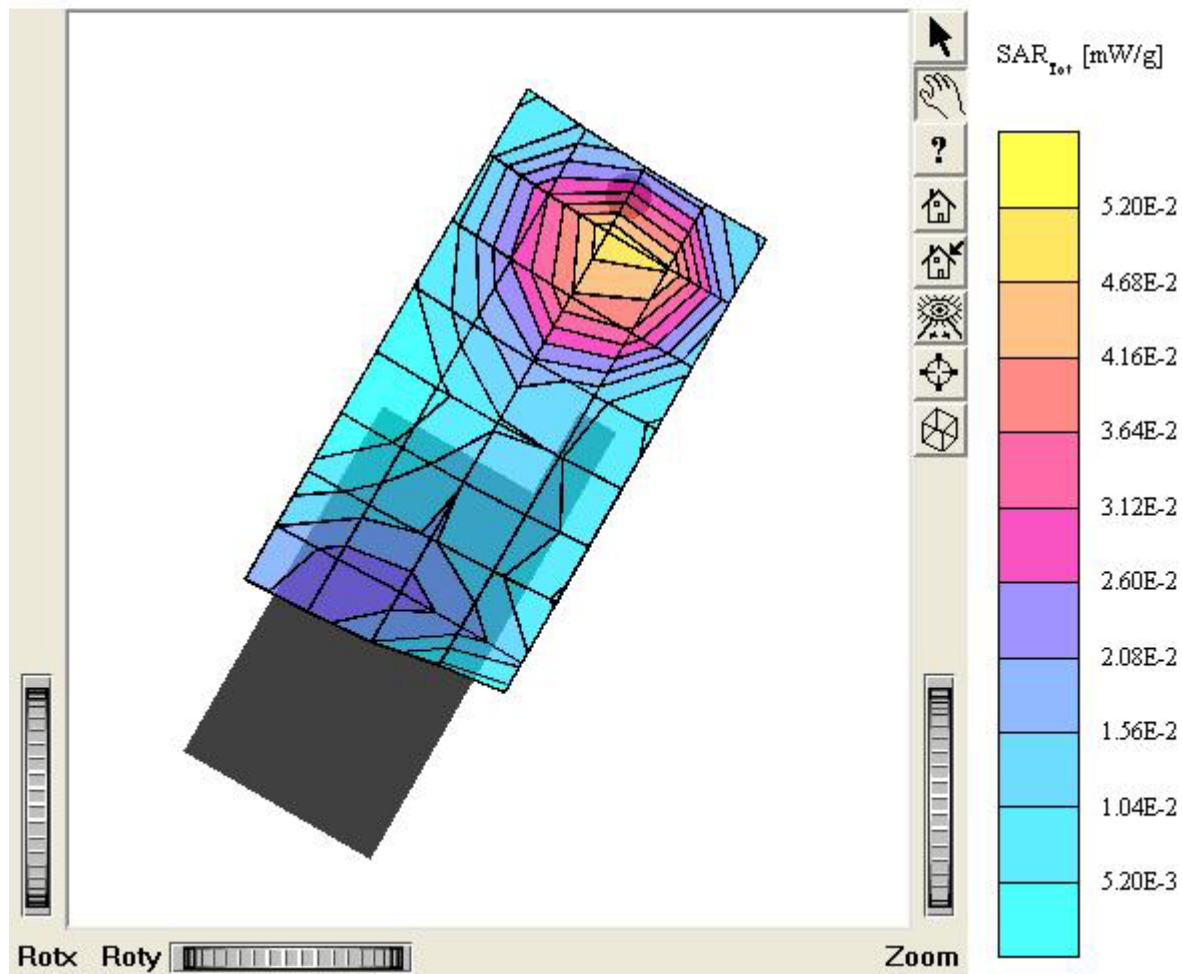

N551

SAM II Phantom, Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.42 \text{ mho/m}$, $\epsilon_r = 39.6$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.128 mW/g, SAR (10g): 0.0768 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.07 dB

Comment:

MODEL : N551

Company : Newgen Telecom Co.,Ltd

Test Position: Right Tilt / Antenna: Fixed

Mode: GSM1900 / Channel : 661

Liquid Temperature: 21.6°C

Date Tested : March 17, 2005

