

APPLICATION FOR CERTIFICATION

On Behalf of
Wildlife Konnections. Inc.

Square

Model Number: WK-128

Prepared for : Wildlife Konnections. Inc.
5580E, 7th Street Joplin, MO64801, USA

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F04138
Date of Test : May.09~11, 2004
Date of Report : May.27, 2004

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Test Facility	1-2
1.3. Test Uncertainty	1-2
2. POWER LINE CONDUCTED EMISSION TEST.....	2-1
3. RADIATED EMISSION TEST	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit (Class B)	3-2
3.4. EUT Configuration on Test	3-2
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Results	3-4
4. BANDWIDTH TEST	4-1
4.1. Test Equipment.....	4-1
4.2. Test Standard	4-1
4.3. Bandwidth Limit.....	4-1
4.4. Test Procedure	4-1
5. PHOTOGRAPH.....	5-1
5.1. Photos of Radiated Emission Test (In Anechoic Chamber)	5-1
5.2. Photo of Bandwidth Test	5-3

APPENDIX I

(5 pages)

TEST REPORT DECLARATION

Applicant : Wildlife Konnections. Inc.
 Manufacturer : Wildlife Konnections. Inc.
 EUT Description : Square
 (A) MODEL NO. : WK-128
 (B) SERIAL NO. : F2004052701
 (C) POWER SUPPLY : DC 12V

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C August. 2003.

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.


Date of Test : May.09~11, 2004

Prepared by :

Jane Dai
 Jane Dai / Assistant

Reviewer :

Lake Wang
 Lake Wang / Supervisor

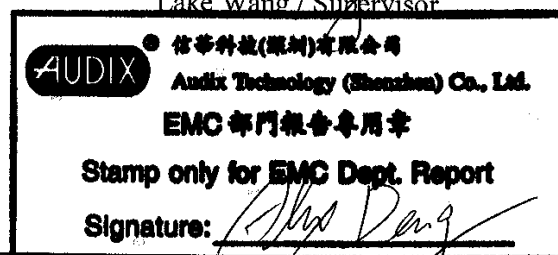

Alex Deng / Assistant Manager

Approved & Authorized Signer :

Name of the Representative of the Responsible Party :

Signature :

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Square
Model Number	:	WK-128
Applicant	:	Wildlife Konnections. Inc. 5580E, 7th Street Joplin, MO64801, USA
Manufacturer	:	Wildlife Konnections. Inc. 5580E, 7th Street Joplin, MO64801, USA
Date of Test	:	May.09~11, 2004

1.2. Test Facility

Site Description

3m Anechoic Chamber : Certificated by FCC, USA
Aug. 15, 2003

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Mar. 15, 2004

EMC Lab. : Certificated by DATech, German
Feb. 02, 2004

Certificated by NVLAP, USA
NVLAP Code: 200372-0
Mar. 31, 2004

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.3. Test Uncertainty

Conducted Emission Uncertainty = $\pm 2.66\text{dB}$

Radiated Emission Uncertainty = $\pm 4.26\text{dB}$

2. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (f) of FCC Part 15 section 15.107, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May.31, 03	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS10	832699/004	Apr.25, 04	1 Year
3.	Amplifier	HP	8447D	2944A06252	Dec.01, 03	1/2 Year
4.	Biconical Antenna	Schaffner	UPA6109	1096	Feb.11, 04	1 Year
5.	Log-period Antenna	Schaffner	VBA6106A	1311	Feb.11, 04	1 Year
6.	PC	ASUS	P4SGX-MX	N/A	N/A	N/A
7.	Printer	HP	Laserjet1300	N/A	N/A	N/A
8.	RF Cable	MIYAZAKI	8D-FB	10m Chamber No.1	Feb.11, 04	1/2 Year
9.	RF Cable	MIYAZAKI	8D-FB	10m Chamber No.2	Feb.11, 04	1/2 Year
10.	RF Cable	MIYAZAKI	8D-FB	10m Chamber No.3	Feb.11, 04	1/2 Year
11.	RF Cable	MIYAZAKI	8D-FB	10m Chamber No.4	Feb.11, 04	1/2 Year
12.	Coaxial Switch	Anritsu	MP59B	M74389	Nov.28, 03	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

EUT

(EUT: Square)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

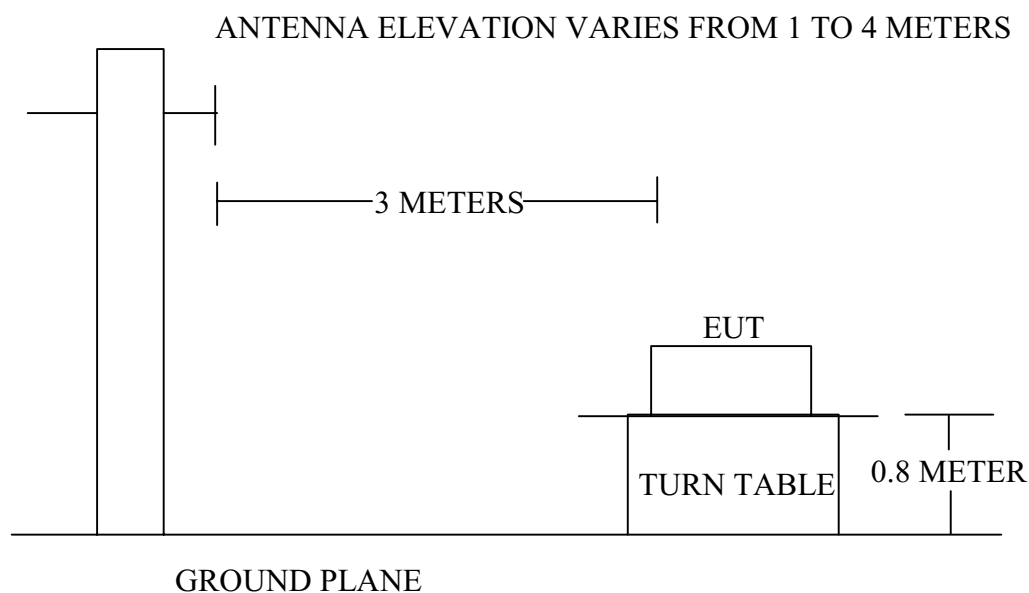

3.3. Radiated Emission Limit (Class C)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. Square (EUT)

Model Number : WK-128
 Serial Number : F2004052701
 Manufacturer : Wildlife Konnections. Inc.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (Running) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2001 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.

The test modes (Running) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix I.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.


Date of Test :	May.10, 2004	Temperature :	25°C
EUT :	Square	Humidity :	50%
Model No. :	WK-128	Test Mode :	Running
Test Engineer:	Pebble		


Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dBμV/m	Limits dBμV/m
315.01	13.58	3.52	23.60	40.70	-34.90	75.60

Remark: 1. All readings are Average values.
2. Emission Level = Antenna Factor + Meter Reading+Cable Loss
3.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dBμV/m	Limits dBμV/m
315.09	13.62	3.52	26.46	43.60	-32.00	75.60
630.12	19.97	4.94	8.59	33.50	-12.50	46.00

Remark: 1. All readings are Average and QP values.
2. Emission Level = Antenna Factor + Meter Reading+Cable Loss
3.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.


Reviewer : 



No.6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639495-7
Fax: +86-755-26632877
Postcode: 518057

Data: 2 File: D:\E3 Test Data\W\wildlife.EMI (4)
Level (dBuV/m)


Date: 2004-05-10 Time: 08:58:58

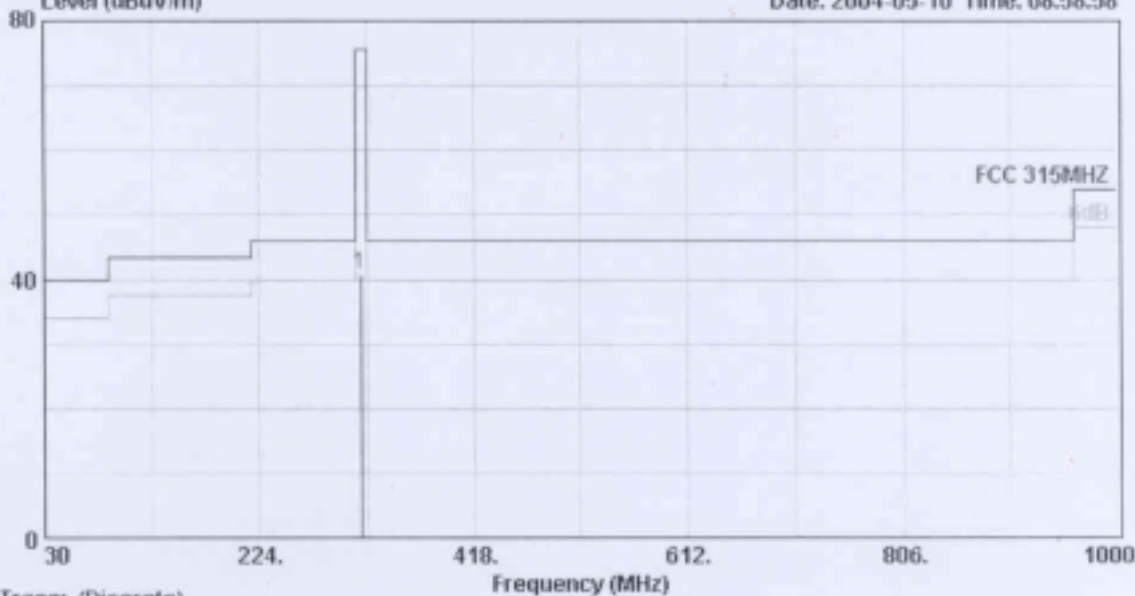


Trace: (Discrete)

Site : 10m Chamber
Condition : FCC 315MHz 3m 2768 FACTOR(3M) HORIZONTAL
EUT : Square Emitter
M/N : WK-128
POWER : DC 12V
Test Mode : Running
Test Engineer: Pebble
Memo : Temp: 25°C Humi: 50%
: H: 1.6m Deg: 305°

	Freq	Limit	Level	Read	Over	CableAntenna		Remark
		Line		Level	Limit	Loss	Factor	
	MHz		dBuV/m	dBuV	dB	dB	dB/m	
1	315.01	75.60	40.70	23.60	-34.90	3.52	13.58	Average



No.6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

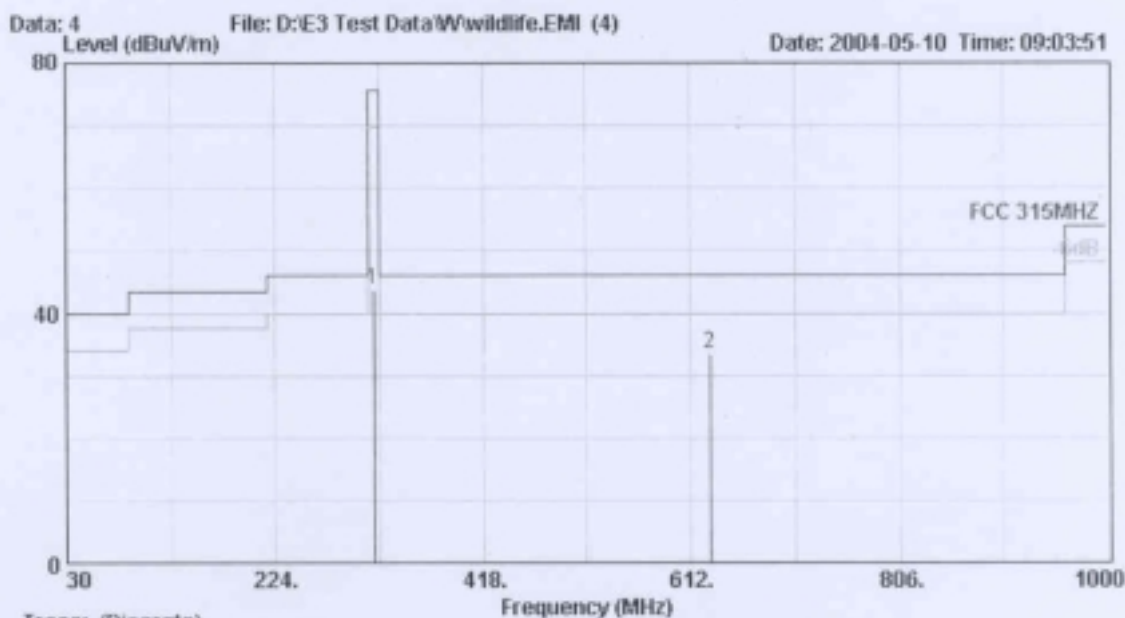

Trace: (Discrete)

Site : 10m Chamber
Condition : FCC 315MHZ 3m 2768 FACTOR(3M) VERTICAL
EUT : Square Emitter
M/N : VK-120
POWER : DC 12V
Test Mode : Running
Test Engineer: Pebble
Memo : Temp: 25 °C Humd: 50%
: H: 1m Deg: 65°

		Limit		Read	Over	CableAntenna		
	Freq	Line	Level	Level	Limit	Loss	Factor	Remark
	MHz	dBuV/m	dBuV/m	dBuV	dB	dB	dB/m	
1	315.09	75.60	43.60	26.46	-32.00	3.52	13.62	Average
2 @	630.12	46.00	33.50	8.59	-12.50	4.94	19.97	QP

4. BANDWIDTH TEST

4.1. Test Equipment

The following test equipments are used during the bandwidth test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	Jun 22, 03	1 Y
2.	Antenna	EMCO	3115	9607-4877	Dec 02, 02	1.5 Y

4.2. Test Standard

The test completeness FCC 15C (235).

4.3. Bandwidth Limit

The minimum 26dB bandwidth shall be at least 10KHz.

4.4. Test Procedure




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 4


File#: C:\EMI TEST DATA\W\wildlife.EMI

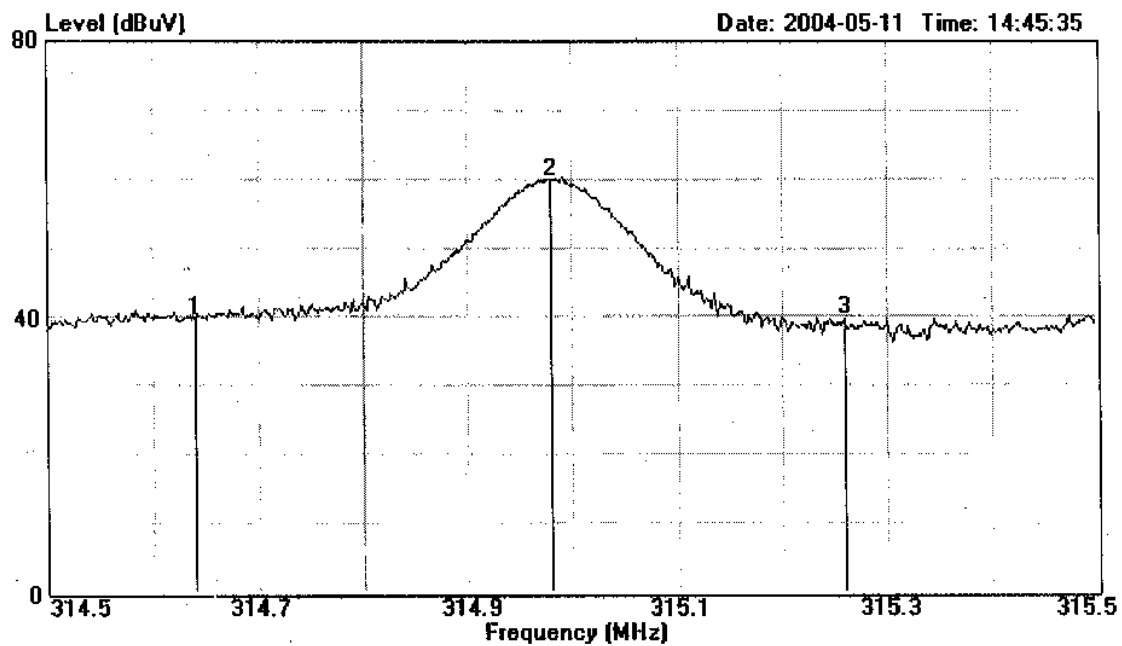


Site : 1# Chamber
Condition :
EUT : Square Emitter
M/N : WK-128
Power : DC 12V
Test Engineer : Pebble
Test Mode : Running
Memo : Temp:25'C Humi:50%

	Freq	Level	Over Limit	Limit Line	Read Level
	MHz	dBuV	dB	dBuV	dBuV
1	314.640	39.78	-----	-----	39.78
2	314.960	59.81	-----	-----	59.81
3	315.260	39.80	-----	-----	39.80

APPENDIX I




No.6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639495-7
Fax: +86-755-26632877
Postcode: 518057

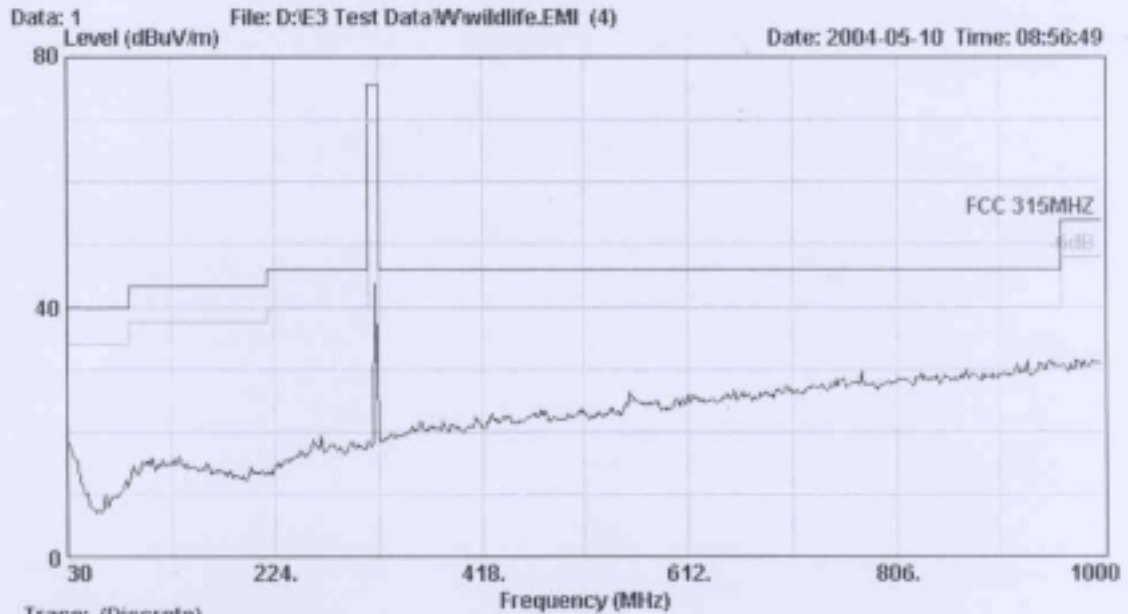

Site : 10m Chamber
Condition : FCC 315MHZ 3m 2768 FACTOR(3M) HORIZONTAL
EUT : Square Emitter
M/N : WK-128
POWER : DC 12V
Test Mode : Running
Test Engineer: Pebble
Memo : Temp: 25°C Humi: 50%

AUDIX[®]

No.6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639495-7
Fax: +86-755-26632877
Postcode: 518057

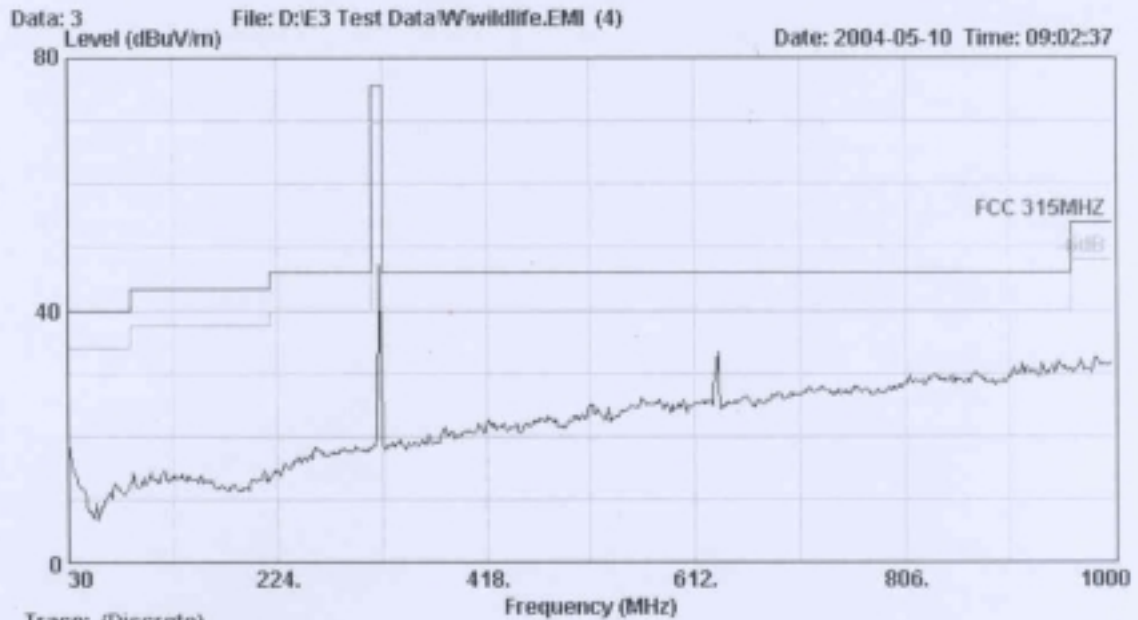

Trace: (Discrete)

Site : 10m Chamber

Condition : FCC 315MHZ 3m 2768 FACTOR(3M) VERTICAL

EUT : Square Emitter


M/N : WK-128

POWER : DC 12V

Test Mode : Running

Test Engineer: Pebble

Humi : Temp: 25 °C Humi: 50%




信華科技(深圳)有限公司


AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 2 File#: C:\EMI TEST DATA\W\wildlife.EMI

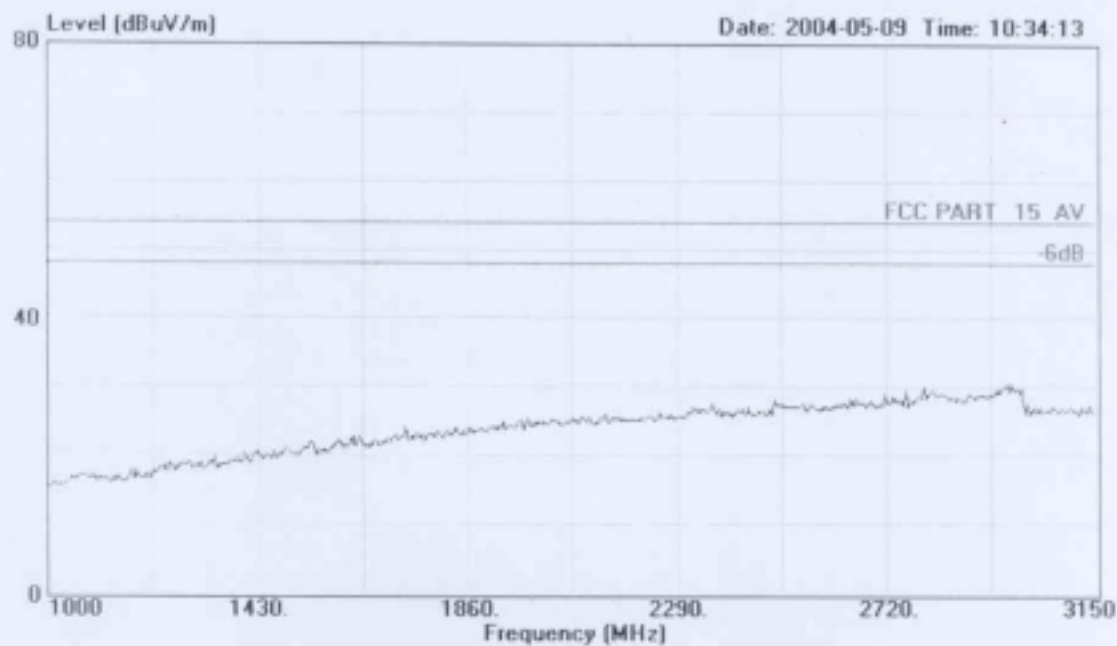

Site : 1# Chamber
Condition : FCC PART 15 AV 3m 3115FACTOR HORIZONTAL
EUT : Square Emitter
M/N : WK-128
Power : DC 12V
Test Engineer : Pebble
Test Mode : Running
Memo : Temp:25'C Humi:50%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 1 File#: C:\EMI TEST DATA\W\wildlife.EMI

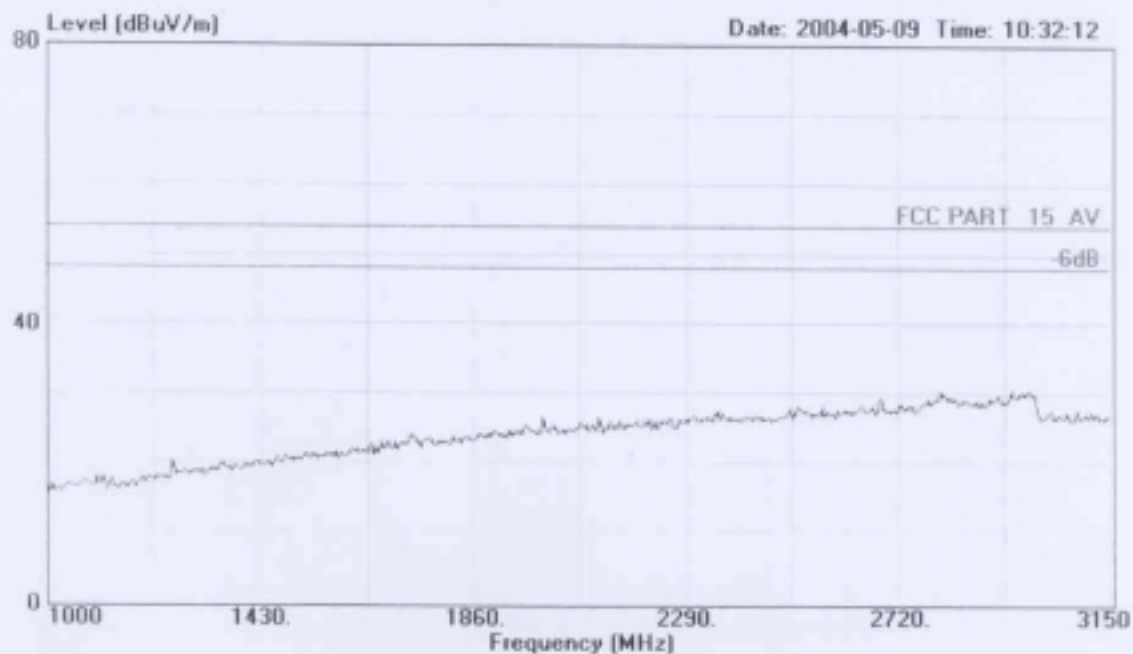

Site : 1# Chamber
Condition : FCC PART 15 AV 3m 3115FACTOR VERTICAL
EUT : Square Emitter
M/N : UK-128
Power : DC 12V
Test Engineer : Pebble
Test Mode : Running
Memo : Temp:25'C Humi:50%