

Report on the Testing of the

Landis + Gyr Technology, Inc.
Series-6 RF Mesh mSBR Card

In accordance with:
FCC 47 CFR part 15.247
ISED RSS-247 Issue 2, February 2017

Prepared for: Landis + Gyr Technology, Inc.
30000 Mill Creek Ave., Suite 100
Alpharetta, GA 30022



America

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: AT72194622.1P0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Thierry Jean-Charles	Team Lead TUV SUD America Inc.	Authorized Signatory	12/8/2023

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD America, Inc. document control rules.

FCC Accreditation Designation Number US1233
FCC Test Site Registration Number 967699
Innovation, Science, and Economic Development Canada Lab Code 23932

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with the standards listed above.



A2LA Cert. No. 2955.09

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America. © TÜV SÜD.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

TÜV SÜD America
5945 Cabot Parkway, Suite 100
Alpharetta, GA 3005

Phone: 678-341-5900
www.tuv-sud-america.com

TÜV SÜD

TÜV®



Contents

1	Report Summary	3
1.1	Report Modification Record.....	3
1.2	Introduction.....	3
1.3	Brief Summary of Results	5
1.4	Product Information	6
1.5	Deviations from the Standard.....	10
1.6	EUT Modification Record	10
1.7	Test Location	10
2	Test Details	11
2.1	Antenna Requirement	11
2.2	Power Line Conducted Emissions	12
2.3	Radiated Spurious Emissions into Restricted Frequency Bands.....	15
2.4	Test Equipment Used.....	22
3	Diagram of Test Set-ups.....	23
4	Accreditation, Disclaimers and Copyright.....	25



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Table 1.1-1 – Modification Record

Issue	Description of Change	Date of Issue
0	First Issue	12/8/2023

1.2 Introduction

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations Section 15.247 and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein to add a new dipole antenna to the 900 MHz radio on pre-approved module FCC ID: R7PNG0R1S4 / IC: 5294A-NG0R1S4.

The Series-6 RF Mesh mSBR Card radio module contains both 900 MHz and 2.4 GHz radios. The additional transmission modes and antennas addressed in this report are only applicable to the 900 MHz radio.

Applicant	Mr. Raghav Goteti
Manufacturer	Landis + Gyr Technology, Inc.
Applicant's Email Address	Raghav.Goteti@landisgyr.com
Model Name(s)	Series 6 RF Mesh mSBR Card
Product Marketing Name(s)	N651
Serial Number(s)	LAN ID: 612946CA
FCC ID	R7PNG0R1S4
ISED Certification Number	5294A-NG0R1S4
Hardware Version(s)	40-2060
Software Version(s)	Wi-SUN: 26.56 Mesh IP: 24.21
Number of Samples Tested	2
Test Specification/Issue/Date	US Code of Federal Regulation (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2022 ISED Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices, Issue 2, February 2017.



Order Number	72194622
Date of Receipt of EUT	11/7/2023
Start of Test	11/8/2023
Finish of Test	11/13/2023
Related Document(s)	ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device. FCC OET KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, April 2, 2019 US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2022. ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 5, Amendment 1 (March 2019), Amendment 2 (February 2021)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC Part 15.247 and ISED Canada's RSS-247 is shown below.

Table 1.3-1: Test Result Summary

Test Parameter	Test Plan (Yes/No)	Test Result	FCC 47 CFR Rule Part	ISED Canada's RSS	Test Report Page No
Antenna Requirement	Yes	Pass	15.203, 15.204	-----	11
Carrier Frequency Separation	No	Not Tested	15.247(a)(1)	RSS-247 5.1(b)	--
Number of Hopping Channels	No	Not Tested	15.247(a)(1)(i)	RSS-247 5.1(c)	--
Channel Dwell Time	No	Not Tested	15.247(a)(1)(i) 15.247(f)	RSS-247 5.1(c) RSS-247 5.3(a)	--
20 dB Bandwidth	No	Not Tested	15.247(a)(1)(i)	RSS-247 5.1(c)	--
99% Bandwidth	No	Not Tested	-----	RSS-GEN 6.7	--
Peak Output Power	No	Not Tested	15.247(b)(2)	RSS-247 5.4(a)	--
Average Output Power	No	Not Tested	15.247(b)(3)	RSS-247 5.4(a)	--
Band-Edge Compliance of RF Conducted Emissions	No	Not Tested	15.247(d)	RSS-247 5.5	--
RF Conducted Spurious Emissions	No	Not Tested	15.247(d)	RSS-247 5.5	--
Radiated Spurious Emissions into Restricted Frequency Bands	Yes	Pass	15.205, 15.209	RSS-GEN 8.9, 8.10	15
Power Spectral Density	No	Not Tested	15.247(e)	RSS-247 5.2(b)	--
Power Line Conducted Emissions	Yes	Pass	15.207	RSS-GEN 8.8	12
Duty Cycle	No	-----			-----

1.4 Product Information

1.4.1 Technical Description

The Series-6 RF Mesh platform supports half-duplex operation in both the Sub-GHz and 2.4-GHz bands. There are 2 types of RF Mesh Communication Stacks supported by the Series-6 platform: Mesh IP (SBS) and Wi-SUN (WSN).

Table 1.4-1 – Wireless Technical Information

Detail	Description
FCC ID	R7PNG0R1S4
ISED Certification Number	5294A-NG0R1S4
Model(s) / HVIN(s)	Series 6 RF Mesh mSBR Card
PMN(s)	N651
Frequency Range	902.2 – 927.8 MHz
Modulation Format	FSK, OFDM
Antenna Type / Description:	Dipole Antenna / 5.7 dBi Gain

A full description and detailed product specification details are available from the manufacturer.

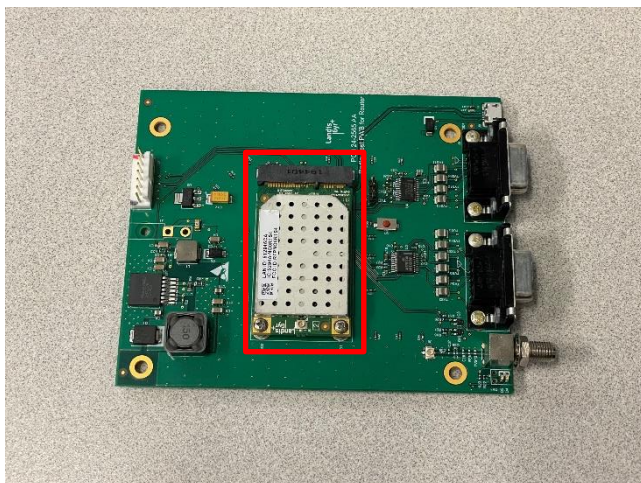


Figure 1.4.1-1 –Front view of the AC Power Line CE module with evaluation board

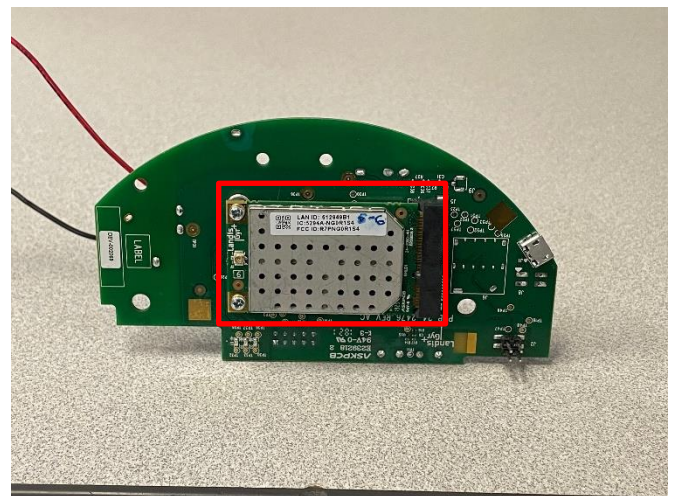


Figure 1.4.1-2 –Front view of the Radiated EUT module with evaluation board

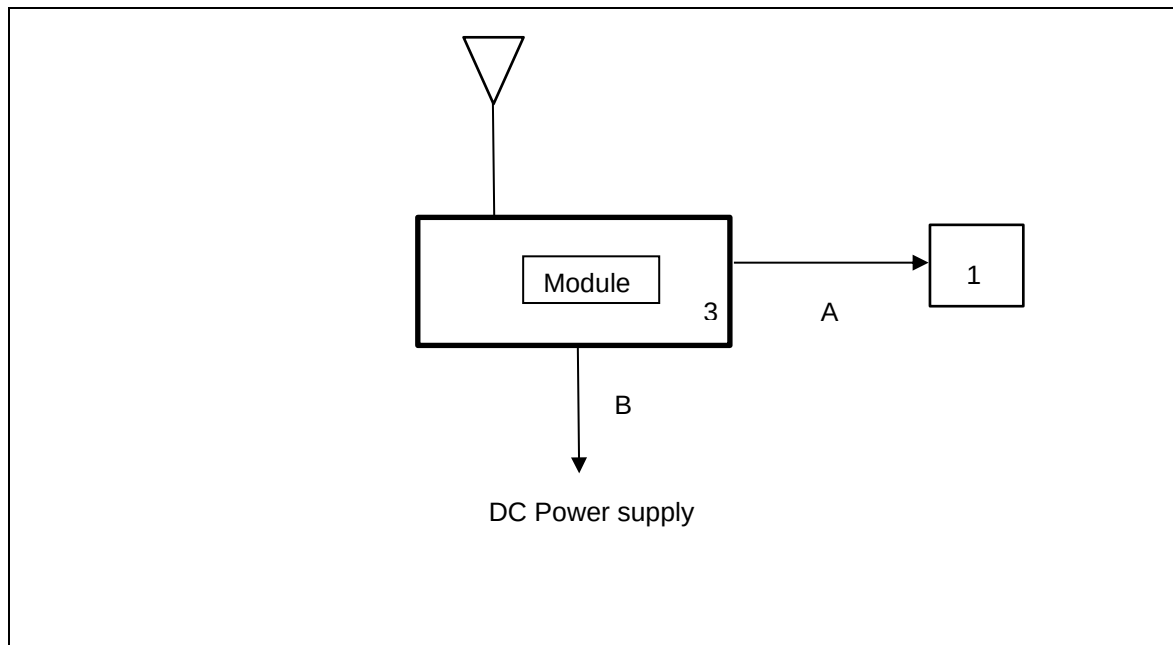


Figure 1.4.1-3 – Radiated Test Setup Block Diagram

Table 1.4.1-1 – Cable Descriptions

Item	Cable/Port	Description
A	USB Serial cable	Programming cable connected to laptop
B	DC Power Supply Cable	Power Supply DC power supply

Table 1.4.1-2 – Support Equipment Descriptions

Item	Make/Model	Description
1	Thinkpad	Laptop for configuration
2	Landis & Gyr	Evaluation Board
3	Landis & Gyr	Evaluation Board

Two different evaluation boards were used for AC Power Line conducted emissions and radiated measurements is to stay consistent with the original FCC unit setup photos.



1.4.2 Modes of Operation

The Landis + Gyr Series-6 RF Mesh mSBR Card radio is an electricity metering module which includes a 900 MHz ISM transmitter as well as a 2.4 GHz OFDM transmitter.

This test report documents the compliance of the 900 MHz Frequency Hopping Spread Spectrum transceiver mode of operation. This model provides distinct proprietary modes of operation using both FHSS and hybrid classifications as outlined below. The following modes only were evaluated considering a wide frequency range for this purpose of evaluation where adding a new antenna and the other modes were covered in the original certification.

Mode of Operation	Frequency Range (MHz)	Number of Channels	Channel Separation (kHz)	Stack / Mode	Data Rates (kbps) / Coding Schemes	Classification
1	902.2 – 927.8	129	200	WSN (802.15.4 SUN FSK)	50	FHSS
2	902.4 – 927.6	64	400	WSN (802.15.4 SUN OFDM)	MCS2 – MCS3 (Option 3)	Hybrid



1.4.3 Monitoring of Performance

For radiated emissions and AC Power Line conducted emissions, the EUT was evaluated with external dipole antenna. For radiated emissions, the EUT was evaluated in three orthogonal orientations. The worst-case orientation was Y-position. See test setup photos for more information. The EUT was programmed to generate a continuously modulated signal on each channel evaluated.

The worst-case data rate for the RSE into Restricted Frequency Bands measured is listed below:

Mode of Operation	Classification	Data Rate (kbps)
1	FHSS	50
2	Hybrid	MCS2 (Option 3)

Power setting during test: Mode of operation 1: 30 dBm
 Mode of operation 2: 22 dBm



1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test program. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	Initial State		

The equipment was tested as provided without any modifications.

1.7 Test Location

TÜV SÜD conducted the following tests at our Alpharetta, GA test laboratory.

Test Name	Name of Engineer(s)	Accreditation
Antenna Requirement	Divya Adusumilli	A2LA
Power Line Conducted Emissions	Divya Adusumilli	A2LA
Radiated Spurious Emissions into Restricted Frequency Bands	Divya Adusumilli	A2LA

Office address:
TÜV SÜD America
5945 Cabot Parkway, Suite 100
Alpharetta, GA 30005, USA



2 Test Details

2.1 Antenna Requirement

2.1.1 Specification Reference

FCC Section: 15.203, 15.204

2.1.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.1.3 Date of Observation

11/8/2023

2.1.4 Test Method

N/A

2.1.5 Environmental Conditions

N/A

2.1.6 Observation

The EUT utilizes one additional external antenna, a dipole antenna with peak gain 5.7 dBi. Connection to the module is via U.fl to SMA adapter cable, therefore satisfying the requirements of Section 15.203.



2.2 Power Line Conducted Emissions

2.2.1 Specification Reference

FCC Section: 15.207
ISED Canada: RSS-Gen 8.8

2.2.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.2.3 Date of Test

11/10/2023

2.2.4 Test Method

ANSI C63.10 section 6 was the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss
Margin = Corrected Reading - Applicable Limit

2.2.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar



2.2.6 Test Results

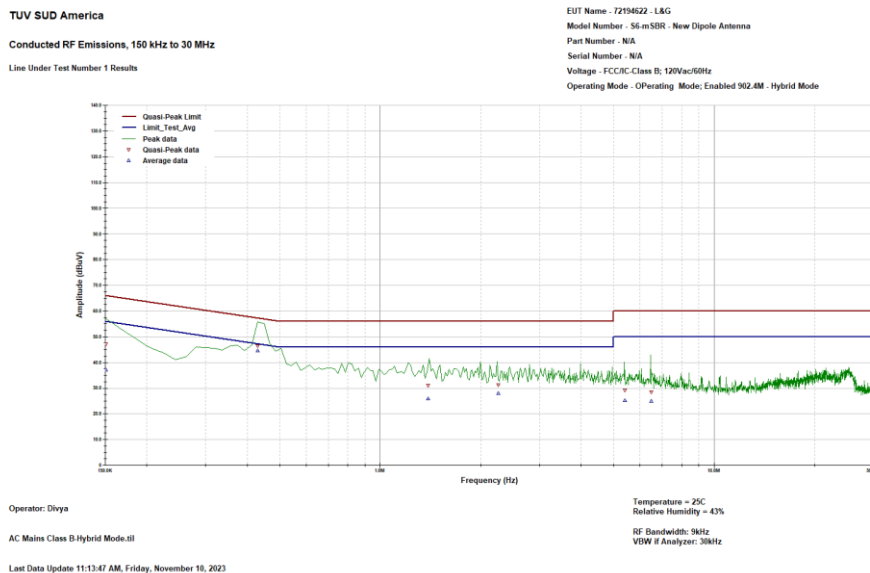


Figure 1: Conducted Emission Plot – Line 1 – Dipole Antenna

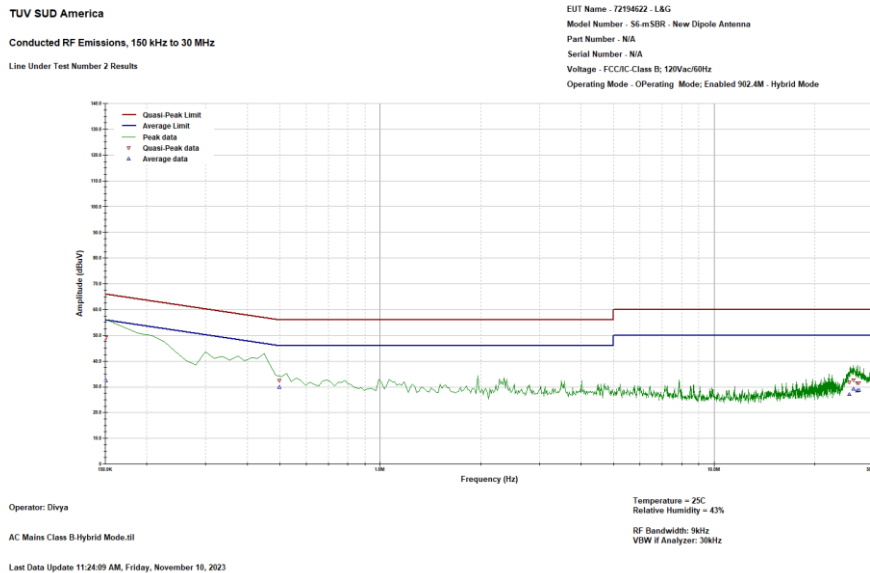


Figure 2: Conducted Emission Plot – Neutral – Dipole Antenna

**Table 2.2.6-1: Conducted EMI Results-Avg – Line 1 – Dipole Antenna**

Frequency	Avg Limit	Avg Level Corr	Avg Level	CF	Avg Margin	Result
MHz	dBuV	dBuV	dBuV	dB	dB	
0.15	56	37.1	27.5	9.682	-18.8	PASS
0.43	48	44.5	34.8	9.654	-3.5	PASS
1.39	46	25.9	16.2	9.703	-20.1	PASS
2.26	46	28	18.2	9.78	-18	PASS
5.4	50	25.3	15.4	9.82	-24.7	PASS
6.49	50	25	15.2	9.81	-25	PASS

Table 2.2.6-2: Conducted EMI Results-QP – Line 1 – Dipole Antenna

Frequency	QP Limit	QP Level Corr	QP Level	CF	QP Margin	Result
MHz	dBuV	dBuV	dBuV	dB	dB	
0.15	66	47.1	37.4	9.682	-18.9	PASS
0.43	58	46.3	36.7	9.654	-11.7	PASS
1.39	56	30.9	21.2	9.703	-25.1	PASS
2.26	56	31.2	21.5	9.78	-24.8	PASS
5.4	60	29	19.2	9.82	-31	PASS
6.49	60	28.4	18.6	9.81	-31.6	PASS

Table 2.2.6-3: Conducted EMI Results-Avg – Neutral – Dipole Antenna

Frequency	Avg Limit	Avg Level Corr	Avg Level	CF	Avg Margin	Result
MHz	dBuV	dBuV	dBuV	dB	dB	
0.15	56	32.3	22.7	9.675	-23.6	PASS
0.5	46	29.9	20.3	9.63	-16.2	PASS
25.45	50	27.1	17	10.103	-22.9	PASS
26.19	50	29.2	19.1	10.126	-20.8	PASS
26.81	50	28.4	18.3	10.144	-21.6	PASS
27.22	50	28.7	18.6	10.154	-21.3	PASS

Table 2.2.6-4: Conducted EMI Results-QP – Neutral – Dipole Antenna

Frequency	QP Limit	QP Level Corr	QP Level	CF	QP Margin	Result
MHz	dBuV	dBuV	dBuV	dB	dB	
0.15	66	48.9	39.2	9.675	-17.1	PASS
0.5	56	32.5	22.9	9.63	-23.5	PASS
25.45	60	31.8	21.7	10.103	-28.2	PASS
26.19	60	32.5	22.4	10.126	-27.5	PASS
26.81	60	31.5	21.3	10.144	-28.5	PASS
27.22	60	31.4	21.2	10.154	-28.6	PASS



2.3 Radiated Spurious Emissions into Restricted Frequency Bands

2.3.1 Specification Reference

FCC Sections: 15.205, 15.209.
ISED Canada: RSS – Gen 8.9/8.10

2.3.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “0”, as noted in §1.6.

2.3.3 Date of Test

11/08/2023 to 11/13/2023

2.3.4 Test Method

Radiated emissions tests were made over the frequency range of 9 kHz to 10 GHz, 10 times the highest fundamental frequency of 900 MHz. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in Section 15.209.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 150 kHz, quasi-peak measurements were made using a resolution bandwidth RBW of 300 Hz and a video bandwidth VBW of 1 kHz and frequencies between 150 kHz and 30MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 10 kHz and a video bandwidth VBW of 30 kHz. For frequencies between 30 MHz and 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 100 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements were made with RBW of 1 MHz and VBW of 3 MHz.

2.3.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar



2.3.6 Test Results

Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.

Test Results: Pass

See data below for detailed results.

Table 2.3.6-1: Radiated Spurious Emissions Tabulated Data – Mode 1 – 50 kbps – Dipole Antenna

Frequency	Peak Value	QP/Avg Value	Peak Limit	QP/Avg Limit	Peak Margin	QP/Avg Margin	Polarity	Peak Limit Results	QP/Avg Limit Results
MHz	dBμV/m	dBμV/m	dBμV/m	dBμV/m	dB	dB	H/V	Pass/Fail	Pass/Fail
LCH - 902.2 MHz									
71.975	----	18.292	----	40	----	-21.71	H	----	PASS
171.714	----	26.595	----	43.5	----	-16.9	H	----	PASS
347.481	----	24.731	----	46	----	-21.27	H	----	PASS
35.99	----	32.853	----	40	----	-7.15	V	----	PASS
47.993	----	29.558	----	40	----	-10.44	V	----	PASS
119.993	----	29.885	----	43.5	----	-13.61	V	----	PASS
162.214	----	14.993	----	43.5	----	-28.51	V	----	PASS
879.331	----	27.735	----	46	----	-18.27	V	----	PASS
1804.45	43.586	28.315	74	54	-30.41	-25.69	H	PASS	PASS
5412.975	48.492	33.785	74	54	-25.51	-20.21	H	PASS	PASS
6315.575	55.307	44.211	74	54	-18.69	-9.79	H	PASS	PASS
1804.45	43.532	30.041	74	54	-30.47	-23.96	V	PASS	PASS
2454.775	44.772	30.352	74	54	-29.23	-23.65	V	PASS	PASS
6315.2	57.198	47.57	74	54	-16.8	-6.43	V	PASS	PASS
8120.025	53.087	39.077	74	54	-20.91	-14.92	V	PASS	PASS
MCH – 915.0 MHz									
343.865	----	26.175	----	46	----	-19.82	H	----	PASS
702.09	----	15.259	----	46	----	-30.74	H	----	PASS
35.914	----	30.283	----	40	----	-9.72	V	----	PASS
95.985	----	31.564	----	43.5	----	-11.94	V	----	PASS
156.025	----	30.194	----	43.5	----	-13.31	V	----	PASS
2456.525	44.111	30.229	74	54	-29.89	-23.77	H	PASS	PASS
6405.15	55.707	45.466	74	54	-18.29	-8.53	H	PASS	PASS
8234.75	52.113	38.613	74	54	-21.89	-15.39	H	PASS	PASS
9149.8	53.741	39.618	74	54	-20.26	-14.38	H	PASS	PASS
1829.95	43.307	29.217	74	54	-30.69	-24.78	V	PASS	PASS
2457.7	45.483	30.177	74	54	-28.52	-23.82	V	PASS	PASS
5489.9	48.573	34.466	74	54	-25.43	-19.53	V	PASS	PASS



6405.225	56.111	46.044	74	54	-17.89	-7.96	V	PASS	PASS
9150.175	53.298	39.662	74	54	-20.7	-14.34	V	PASS	PASS
HCH – 927.8 MHz									
173.752	-----	25.993	-----	43.5	-----	-17.51	H	-----	PASS
340.207	-----	26.92	-----	46	-----	-19.08	H	-----	PASS
35.942	-----	32.34	-----	40	-----	-7.66	V	-----	PASS
95.985	-----	31.177	-----	43.5	-----	-12.32	V	-----	PASS
119.993	-----	31.727	-----	43.5	-----	-11.77	V	-----	PASS
156	-----	27.889	-----	43.5	-----	-15.61	V	-----	PASS
1855.625	44.863	31.255	74	54	-29.14	-22.75	H	PASS	PASS
6494.425	51.663	38.291	74	54	-22.34	-15.71	H	PASS	PASS
9278.1	54.342	39.713	74	54	-19.66	-14.29	H	PASS	PASS
1855.55	43.664	28.967	74	54	-30.34	-25.03	V	PASS	PASS
6494.775	52.468	40.201	74	54	-21.53	-13.8	V	PASS	PASS
9278.25	54.061	39.735	74	54	-19.94	-14.26	V	PASS	PASS



Table 2.3.6-2: Radiated Spurious Emissions Tabulated Data – Mode 2 – MCS2 – Dipole Antenna

Frequency	Peak Value	QP/Avg Value	Peak Limit	QP/Avg Limit	Peak Margin	QP/Avg Margin	Polarity	Peak Limit Results	QP/Avg Limit Results
MHz	dBµV/m	dBµV/m	dBµV/m	dBµV/m	dB	dB	H/V	Pass/Fail	Pass/Fail
LCH - 902.4 MHz									
72	----	22.825	----	40	----	-17.18	H	----	PASS
176.423	----	23.134	----	43.5	----	-20.37	H	----	PASS
347.651	----	26.338	----	46	----	-19.66	H	----	PASS
35.992	----	33.729	----	40	----	-6.27	V	----	PASS
95.985	----	31.874	----	43.5	----	-11.63	V	----	PASS
119.993	----	31.945	----	43.5	----	-11.56	V	----	PASS
156	----	22.807	----	43.5	----	-20.69	V	----	PASS
1805	43.105	27.939	74	54	-30.89	-26.06	H	PASS	PASS
3609.675	48.065	32.904	74	54	-25.93	-21.1	H	PASS	PASS
6316.975	49.658	37.102	74	54	-24.34	-16.9	H	PASS	PASS
1805.05	42.107	28.302	74	54	-31.89	-25.7	V	PASS	PASS
3609.425	47.389	32.946	74	54	-26.61	-21.05	V	PASS	PASS
6317.2	50.044	36.415	74	54	-23.96	-17.59	V	PASS	PASS
MCH – 915.2 MHz									
171.185	----	21.033	----	43.5	----	-22.47	H	----	PASS
343.846	----	27.45	----	46	----	-18.55	H	----	PASS
35.987	----	32.305	----	40	----	-7.69	V	----	PASS
95.985	----	32.495	----	43.5	----	-11.01	V	----	PASS
120	----	29.231	----	43.5	----	-14.27	V	----	PASS
156.005	----	30.334	----	43.5	----	-13.17	V	----	PASS
1830.6	43.665	27.906	74	54	-30.34	-26.09	H	PASS	PASS
6406.65	55.32	36.269	74	54	-18.68	-17.73	H	PASS	PASS
1830.275	42.339	28.784	74	54	-31.66	-25.22	V	PASS	PASS
6406.35	50.597	36.371	74	54	-23.4	-17.63	V	PASS	PASS
HCH – 927.6 MHz									
180.784	----	22.547	----	43.5	----	-20.95	H	----	PASS
343.87	----	27.421	----	46	----	-18.58	H	----	PASS
36.017	----	33.465	----	40	----	-6.54	V	----	PASS
119.993	----	31.088	----	43.5	----	-12.41	V	----	PASS
156	----	32.265	----	43.5	----	-11.23	V	----	PASS
1855.025	43.517	28.528	74	54	-30.48	-25.47	H	PASS	PASS
2455.65	44.895	30.206	74	54	-29.11	-23.79	H	PASS	PASS
2782.6	44.885	30.311	74	54	-29.12	-23.69	H	PASS	PASS
4638.075	47.935	33.282	74	54	-26.06	-20.72	H	PASS	PASS
1855.075	42.944	28.593	74	54	-31.06	-25.41	V	PASS	PASS
2455.55	45.258	30.242	74	54	-28.74	-23.76	V	PASS	PASS



2782.9	45	30.41	74	54	-29	-23.59	V	PASS	PASS
4638.1	49.458	33.331	74	54	-24.54	-20.67	V	PASS	PASS

TUV EMC Lab

Radiated Emissions, Under 1GHz

HV Graph

Company - 72194622 L+G

Model - S6-mSBR - New Dipole Antenna

Config - WSN 802.15.4 SUN FSK 915MHz FHSS

Operator - Divya

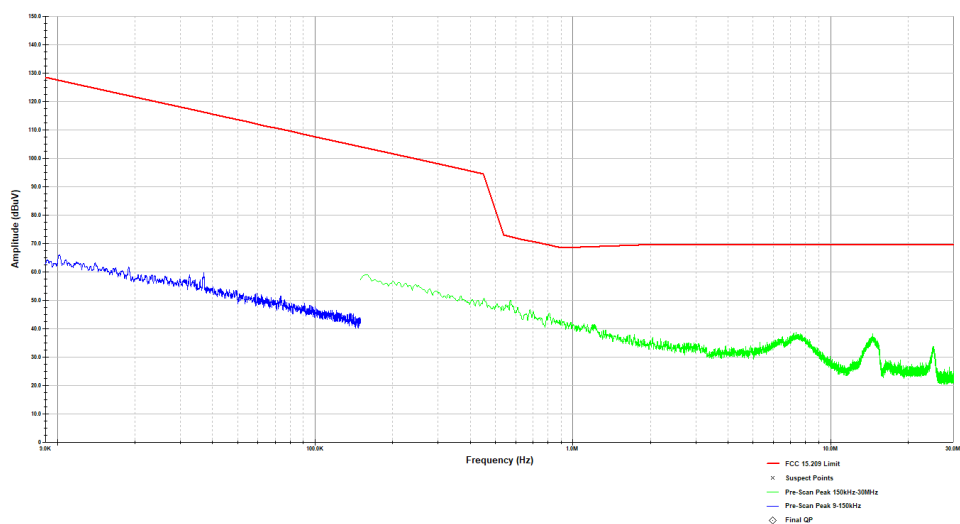


Figure 1: Reference plot for Radiated Spurious Emissions – 9 kHz – 30 MHz – Mode 1 – LCH – Dipole Antenna

TUV EMC Lab

Radiated Emissions, Under 1GHz

HV Graph

Company - 72194622 L+G

Model - S6-mSBR - New Dipole Antenna

Config - WSN 802.15.4 SUN FSK 902.2MHz FHSS

Operator - Divya

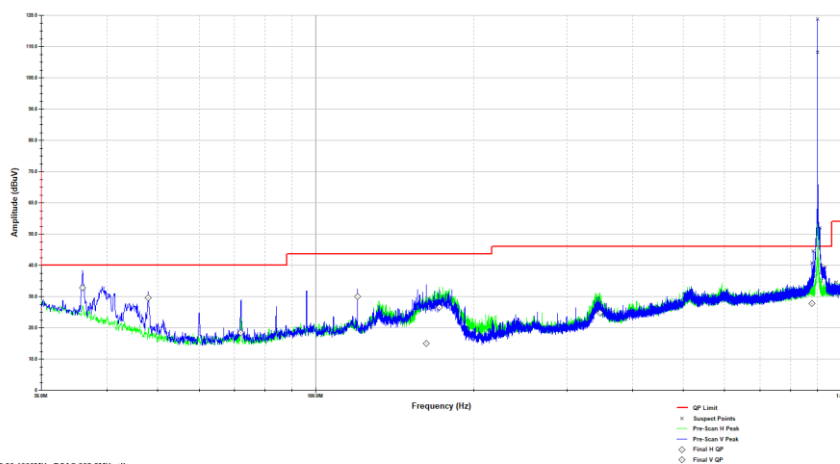


Figure 2: Reference plot for Radiated Spurious Emissions – 30 MHz – 1 GHz – Mode 1 – LCH - Dipole Antenna

Note: Emissions within restricted bands were evaluated.



TUV EMC Lab

Company - 72194622 L+G

Radiated Emissions, Above 1GHz

Model - 56-mSBR - New Dipole Antenna

HV Graph

Config - WSN 802.15.4 SUN F SK 902.2 MHz FHSS

Operator - Divyja

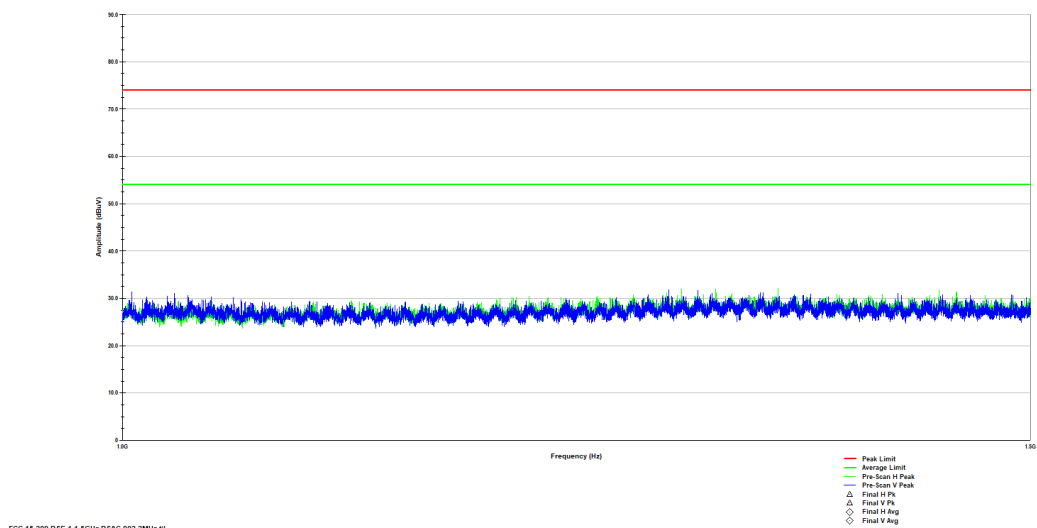


Figure 3: Reference plot for Radiated Spurious Emissions – 1 GHz – 1.5 GHz – Mode 1 – LCH – Dipole Antenna

TUV EMC Lab

Company - 72194622 L+G

Radiated Emissions, Above 1GHz

Model - 56-mSBR New Dipole Antenna

HV Graph

Config - WSN 802.15.4 SUN F SK 902.2 MHz FHSS

Operator - Divyja

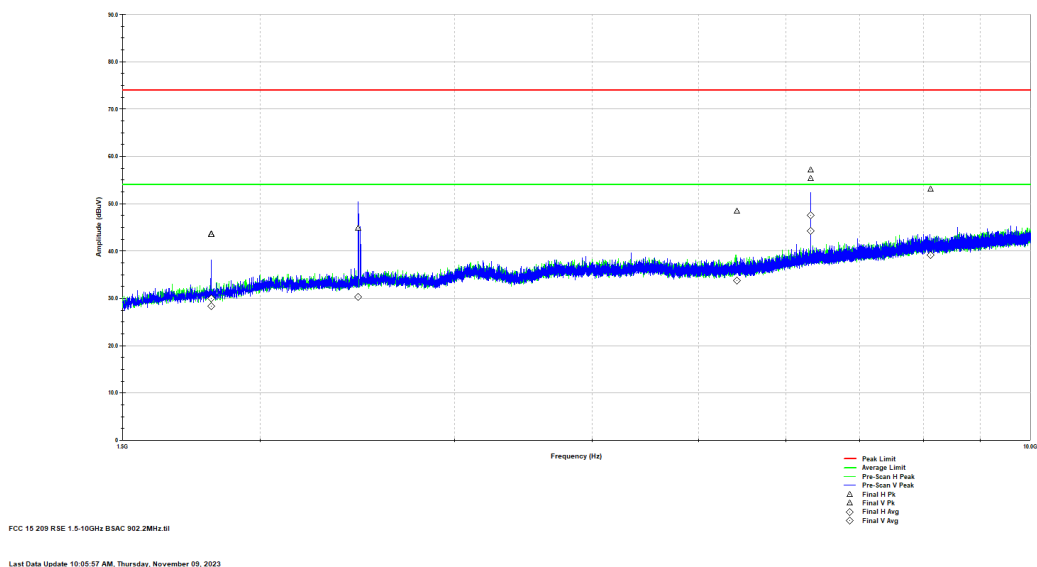


Figure 4: Reference plot for Radiated Spurious Emissions – 1.5 GHz – 10 GHz – Mode 1 – LCH – Dipole Antenna

Note: Emissions within restricted bands were evaluated.



2.4 Test Equipment Used

Table2.4-1 –Equipment List

Asset ID	Manufacturer	Model	Equipment Type	Serial Number	Last Calibration Date	Calibration Due Date
628	EMCO	6502	Active Loop Antenna 10kHz-30MHz	9407-2877	06/20/2023	06/20/2024
853	Teseq	CBL6112D	BiLog Antenna	51616	11/01/2022	11/01/2024
884	ETS Lindgren (EMCO)	3117	DOUBLE-RIDGED GUIDE ANTENNA	240106	05/16/2023	05/16/2025
889	Com Power	PAM 103	Pre-amplifier	18020215	10/02/2023	10/02/2024
338	Hewlett Packard	8449B	High Frequency Pre-Amp	3008A01111	6/22/2023	6/22/2025
882	Rohde & Schwarz	ESW44	ESW44 EMI TEST RECEIVER	101961	06/21/2023	06/21/2024
22	Teledyne Storm Microwave	90-195-456	BSAC Cable	N/A	10/02/2023	10/02/2024
20	Teledyne Storm Microwave	R-90-195-036	BSAC Cable	N/A	07/13/2023	07/13/2024
21	Teledyne Storm Microwave	R-90-195-072	BSAC Cable	N/A	07/13/2023	07/13/2024
337	Microwave Circuits	H1G513G1	Microwave filter	282706	05/31/2023	05/31/2024
872	HP	E7402A	EMI Receiver	US40240258	6/22/2023	6/22/2024
871	ACS	n/a	Conducted EMI Cable	871	3/24/2023	3/24/2024
3010	Rohde & Schwarz	ENV216	Two-Line V-Network	3010	6/21/2023	6/21/2024

N/A – Not Applicable

NCR – No Calibration Required

3 Diagram of Test Set-ups

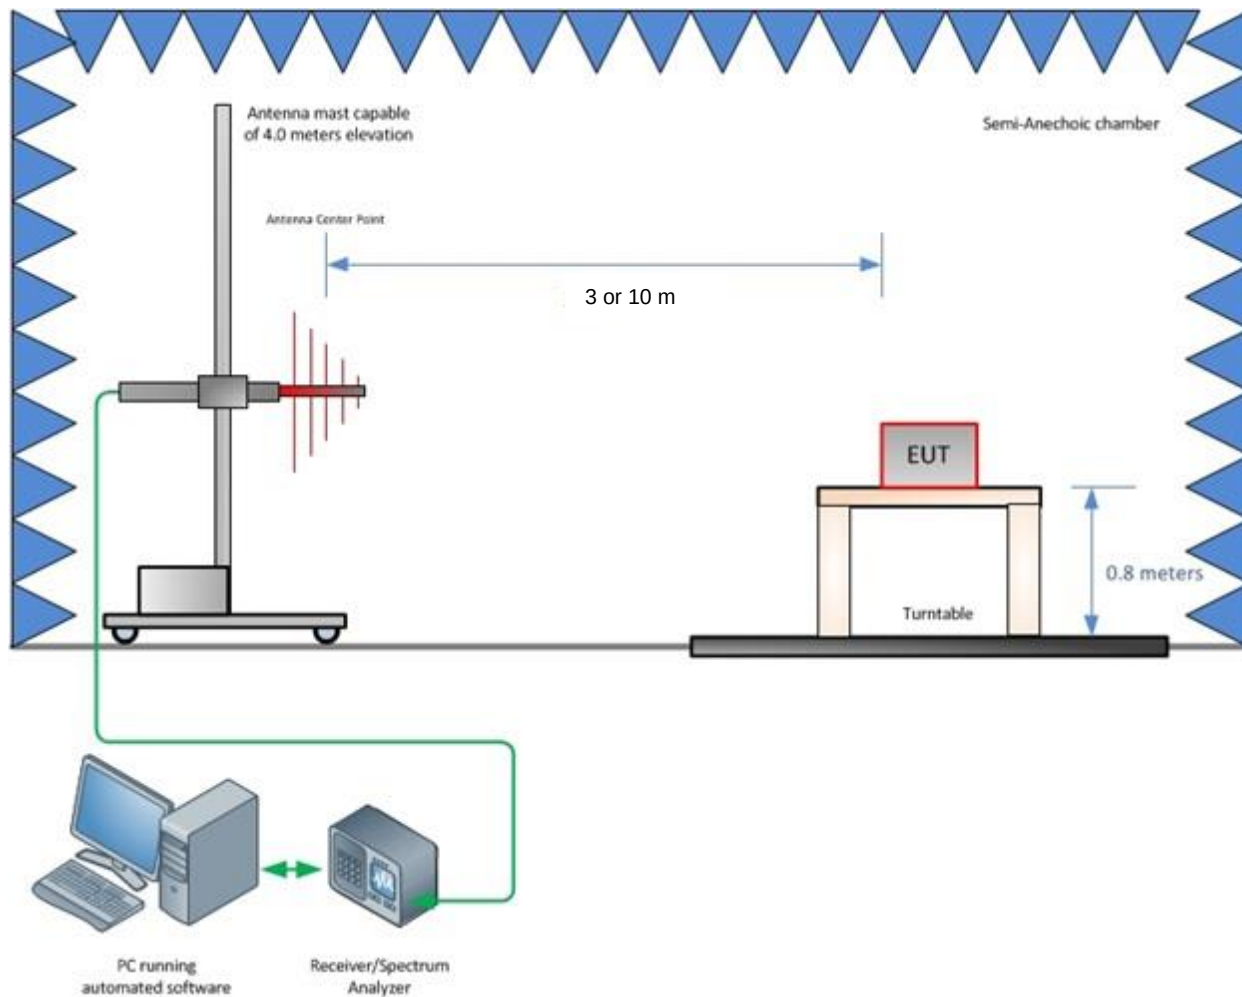


Figure 3-1 – Radiated Emissions Test Setup up to 1 GHz

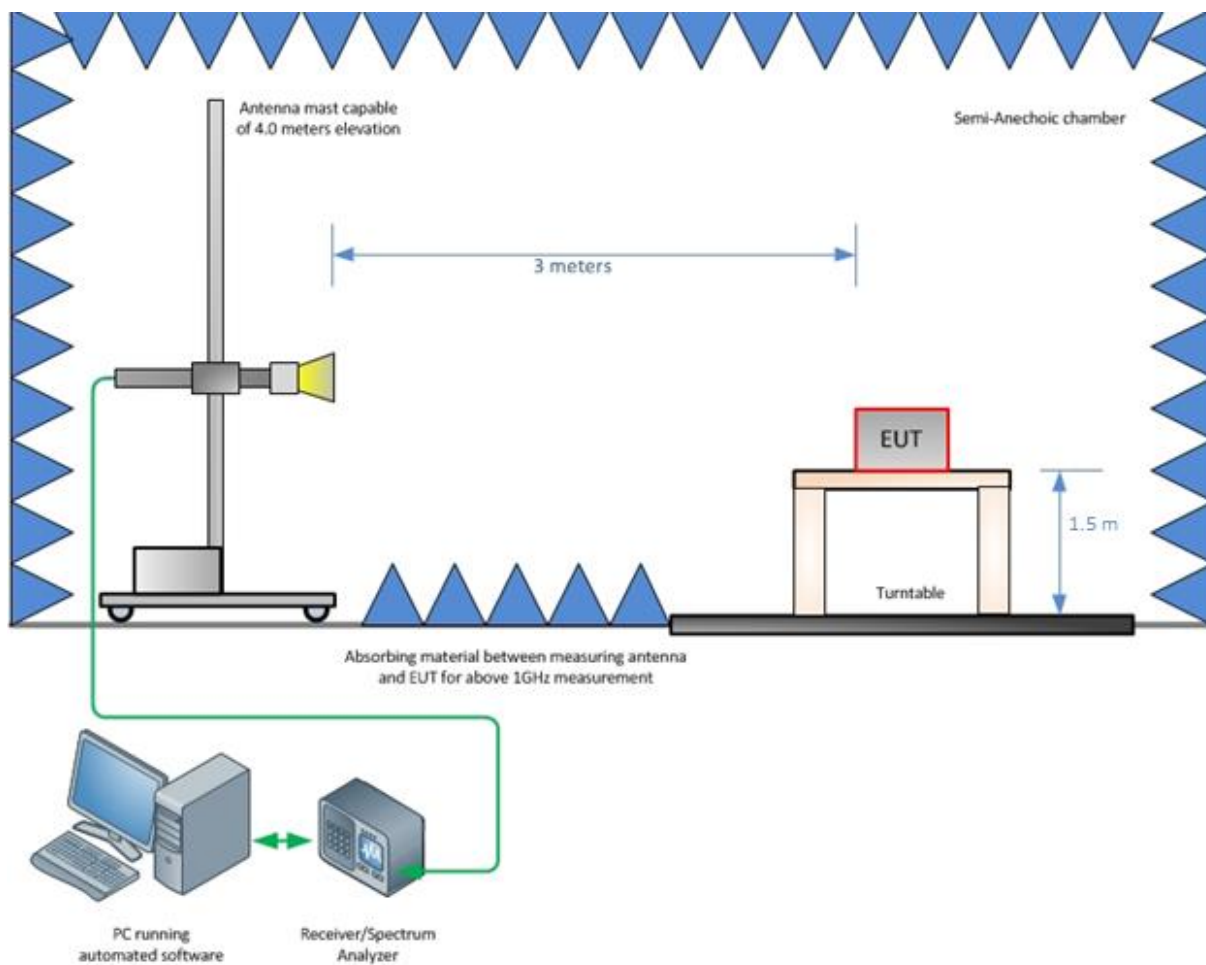


Figure 3-2 – Radiated Emissions Test Setup above 1 GHz



4 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

STATEMENT OF MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Table 4-1: Estimation of Measurement Uncertainty

Parameter	U_{lab}
Radiated Emissions ≤ 1 GHz	± 5.814 dB
Radiated Emissions > 1 GHz	± 4.318 dB
Temperature	± 0.860 °C
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	± 3.360 dB

TEST EQUIPMENT

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated to meet test method standard requirements and/or manufacturer's specifications.