



LCIE



Accreditation
N°1-0312
Scope available on
www.cofrac.fr

TEST REPORT

N°: 15469973 – 779746-B

Version : 03

Subject

Electromagnetic compatibility (EMC):

47 CFR Part 15.107 & Part 15.109
Subpart B of 2021
ANSI C63.4 of 2014
ICES-003 issue 7 of 2020 (P)

Issued to

ADVEEZ
4 Avenue Jean Monnet
31770 COLOMIERS
FRANCE

Apparatus under test

Product GPS TRACKER
Trade mark ADVEEZ
Manufacturer ADVEEZ
Model under test FAMA LITE
Family product FAMA OBD / FAMA Lite (See details on P5)
Serial number AD-FOA07-0822455
FCC ID R8T-FAMA-OBDLITE

Test date

January 30, 2023 to January 31, 2023

Test location

LCIE, Ecuelles

FCC registration Number

582868

FCC designation Number

FR0010

Test performed by

Laurent Deneux

Composition of document

27 pages

Initial issue

February 2, 2023

Document issued on

April 4, 2024

Written by :
Laurent Deneux
Tests operator

Approved by :
Julien Boutaud
Technical manager

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified or rule defined by the test method, the decision of conformity doesn't take into account the uncertainty of measures. This document doesn't anticipate any certification decision. The COFRAC accreditation attests the technical capability of the testing laboratory for the only tests covered by the accreditation. If some tests mentioned in this report are carried out outside the framework of COFRAC accreditation, they are indicated by an asterisk (P)

LCIE

Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

33, Av du Général Leclerc
92266 Fontenay Aux Roses
FRANCE

Tél : +33 1 40 95 60 60
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.

Version	Date	Author	Modification
01	February 2, 2023	Laurent DENEUX	Creation of the document
02	December 21, 2023	Jerome Petitjean	addition of the FAMA ODB reference in equipment of the same family (chapter 2.1)
03	April 4, 2024	Laurent DENEUX	Addition a label (page 7), FCC ID number and FCC registration & designation number

Date of receipt of test item: January 27, 2023



SUMMARY

1.	TEST PROGRAM.....	4
2.	EQUIPMENT DESCRIPTION (DECLARED BY PROVIDER).....	5
3.	MEASUREMENT OF RADIATED EMISSIONS	9
4.	MEASUREMENT OF CONDUCTED DISTURBANCE.....	17
5.	UNCERTAINTIES CHART.....	26
	AUTO CONTROL.....	27



1. Test Program

References

- ✓ CFR 47 Part 15 Subpart B - Radio frequency devices - Unintentional radiators 2021
- ✓ ICES -003 issue 7 of 2020 (H)
- ✓ ANSI 63.4 of 2014

Emission tests:

Test Description	Main characteristics	Test result - Comments
Measurement of radiated electric field in shielded room 15.109 (a), (b) & (c)	☐ Class A ☐ Class B	☐ PASS ☐ FAIL ☒ NA ☐ NP (Limited Program)
Measurement of radiated electric field in open space	☐ Class A ☒ Class B	☒ PASS ☐ FAIL ☐ NA ☐ NP (Limited Program)
Measurement of conducted disturbance on the AC main power port 15.107 (a) (c) (d)	☐ Class A ☒ Class B	☒ PASS (1) ☐ FAIL ☐ NA (1) ☐ NP (Limited Program)

(1): EUT not directly or indirectly connected to the AC Power Public Network

The product is compliant according to CFR 47 Part 15 Subpart B - Radio frequency devices - Unintentional radiators & ICES -003 standards.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed

2. Equipment Description (declared by provider)

2.1. EQUIPMENT OF THE SAME FAMILY

-Tests are performed on the most complete product FAMA LITE, SN: AD-FOA07-0822455. See Table below for difference between products.

Product	FAMA OBD	FAMA LITE
BLE (HW & SW)	Same	
LTE/GSM (HW & SW)	Same	
GNSS (HW & SW)	Same	
Antenna LTE & GNSS	Same	
Hardware (PCB et components)	Same	
Software (functionality)	1 peripheral CAN and 1 peripheral OBD	2 peripherals CAN
Enclosure	Same	
Cable connector (FAMA side)	Same	
Cable	without sheath	with V-W1 sheath

2.2. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT): FAMA LITE

Serial Number: AD-FOA07-0822455



Equipment Under Test



Inputs/outputs - Cable:

Access	Inputs / Outputs	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Power supply and data	Input /output	Others	1.5		☐	☒	
Antenna	Input	Antenna	2.5		☒	☒	GPS
Antenna	Input	Antenna	2.5		☒	☒	GSM


Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Power supply 12v-DC	HP6201B	-	No tested

Equipment information: (Declared by provider)

Apparatus Description	GPS tracker			
Type of power source:	☒ AC power supply	☐ DC power supply	☒ Battery (Lithium)	
Test source voltage:	Vmin-Vmax:	☒ 120V- 240 V / 50 - 60 Hz	☒ 3.7VDc	
Operating Modes	Mode 1	Automatic (<3s) – Verification of Bluetooth and 2G/4G communications, Powered by 240V-50Hz		
	Mode 2	Automatic (<3s) – Verification of Bluetooth and 2G/4G communications, Powered by 120V-60Hz		
	Mode 3	Automatic (<3s) – Verification of Bluetooth and 2G/4G communications, Powered by internal battery 3.7Vdc		
	Mode 4	Mode 4		
Highest internal frequency (PLL, Quartz, Clock, Microprocessor...):		F _{Highest} :	NC	MHz

2.3. EQUIPMENT LABELLING

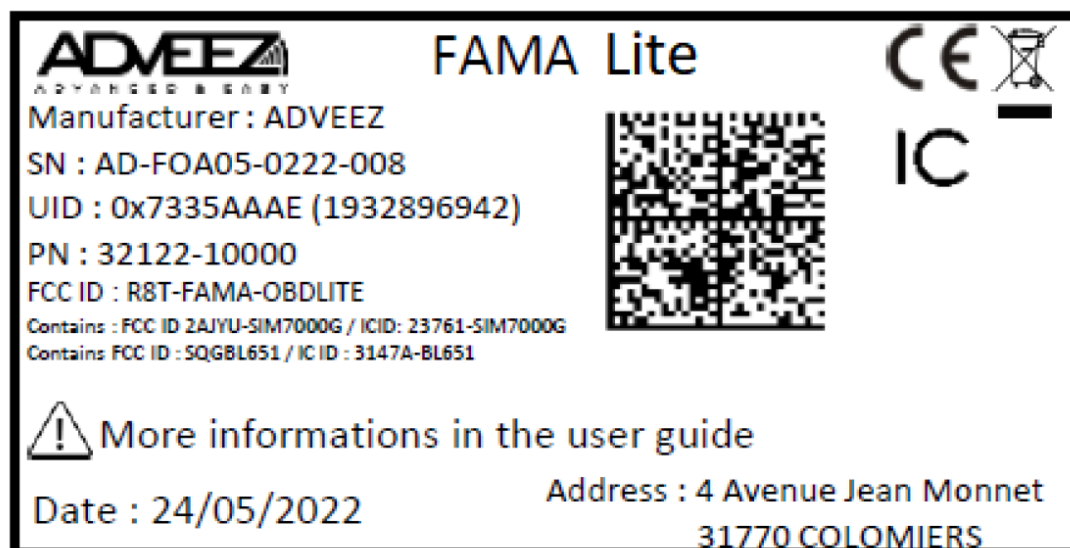

Equipment Labelling

2.4. EQUIPMENT MODIFICATIONS

☒ None ☐ Modification:



2.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where:

FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Example:

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

2.6. Test distance extrapolation – FCC/ISED

The field strength is extrapolated to the new measurement distance using formula from FCC Part15.31 (f) and §6.5-6.6 RSS-GEN:

Below 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Above 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Where:

FS_{limit} is the calculation of field strength at the limit distance, expressed in dB μ V/m

FS_{max} is the measured field strength, expressed in dB μ V/m

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance



3. Measurement of radiated emissions

3.1. ENVIRONMENTAL CONDITIONS

Test performed by : **Laurent Deneux**
Date of test : January 31, 2023
Ambient temperature : 42°C
Relative humidity : 18%

3.2. TEST SETUP

Specifications:

Frequency	30 – 1000 MHz	RBW 120 kHz
	1-6GHz	RBW 1MHz
Detector	Peak and Quasi-Peak	

Pre characterization in semi anechoic room is performed to define the critical frequencies

Operating conditions:

- The Equipment under Test is installed:

- ☐ Measure in semi anechoic room
☒ Measure in open area site

- Measuring distance:

- ☒ 3m
☒ 10m

- Deviation method:



- ☐ Yes
☒ No

-Product installation:


- ☒ The EUT was tested as a tabletop equipment and was placed on a non-conducting platform the top of which is 0.8m above the metal ground plane.
☐ The EUT is at 10cm height from reference plane

Operating mode:

- ☒ Mode 1 ☐ Mode 2 ☒ Mode 3 ...

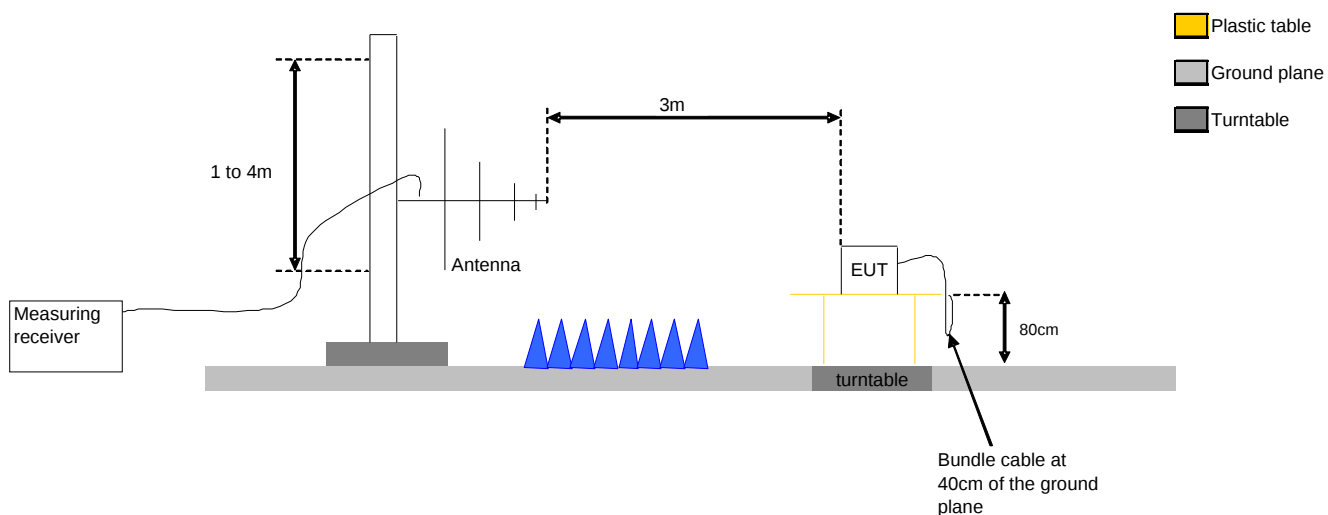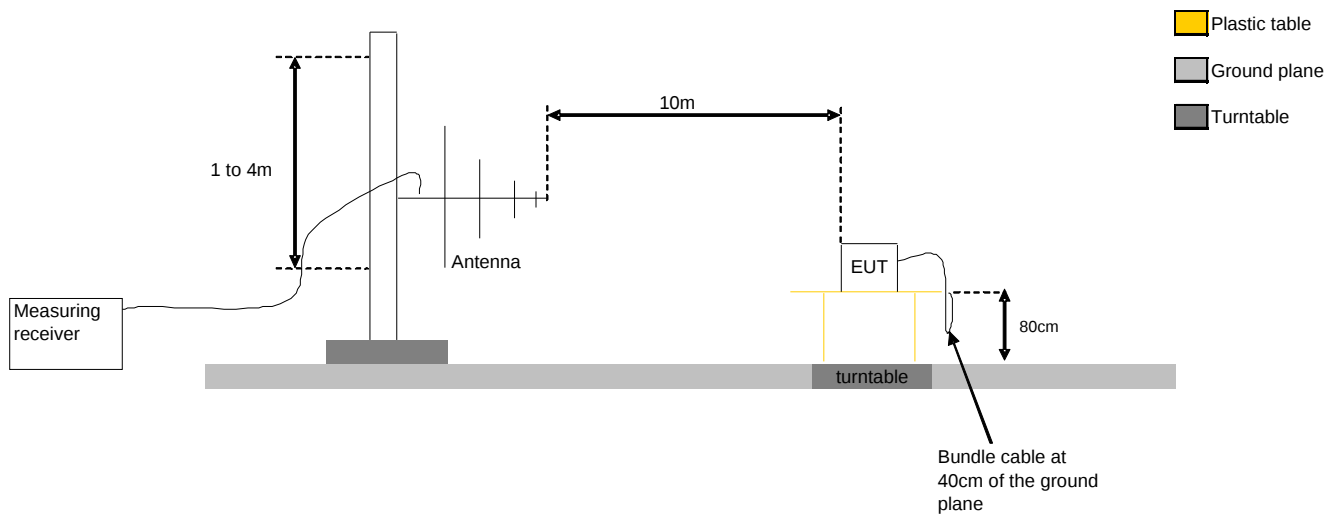

Test Set up for radiated measurement in open area test site above 1GHZ

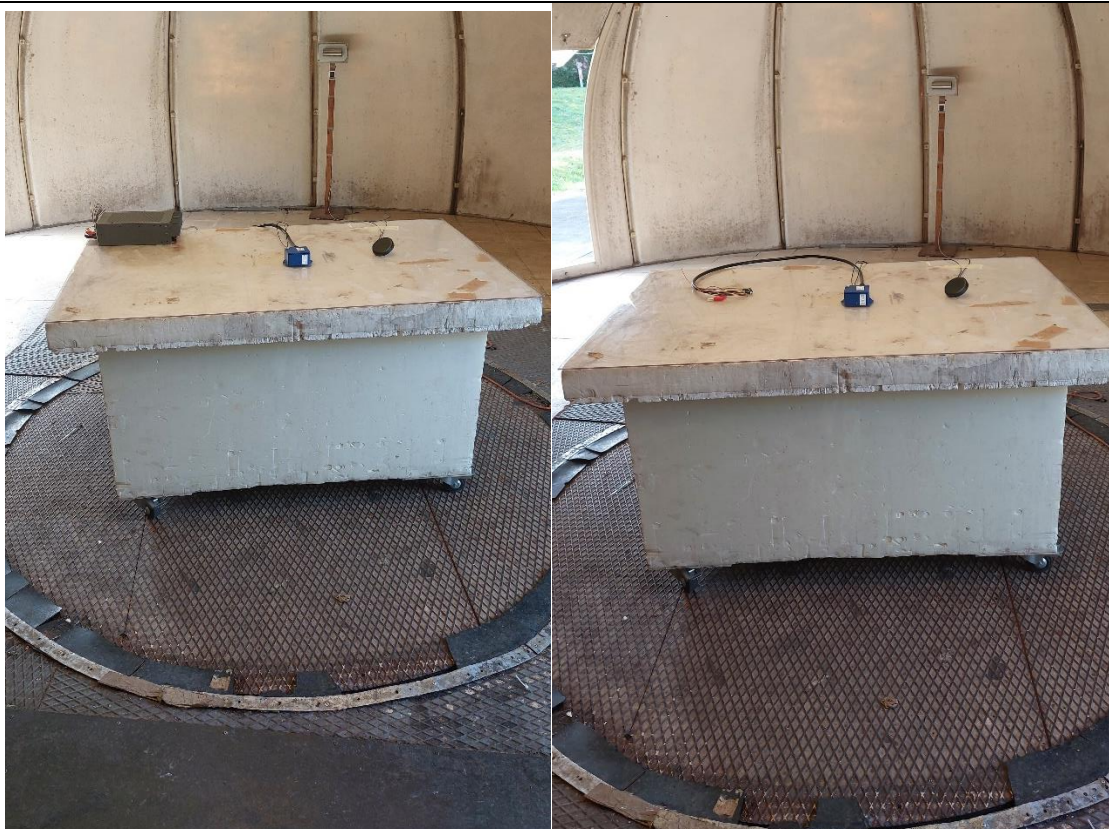

Measurement of radiated disturbances.



3.3. LIMIT FOR FCC

☐ Class A in open area test site

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) peak	dB (μV/m) average	Distance
30-88MHz	39.5	-	-	10m
88 – 216MHz	43.9	-	-	10m
216 – 960 MHz	46.9	-	-	10m
960 – 1000 MHz	50	-	-	10m
1000-6000MHz	-	80	60	3m

☒ Class B in open area test site

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) peak	dB (μV/m) average	Distance
30-88MHz	30	-	-	10m
88 – 216MHz	33.5	-	-	10m
216 – 960 MHz	36	-	-	10m
960 – 1000 MHz	43.9	-	-	10m
1000-6000MHz	-	74	54	3m

3.4. LIMIT FOR IECS 003

☐ Class A in open area test site

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) peak	dB (μV/m) average	Distance
30-88MHz	40	-	-	10m
88 – 216MHz	43.5	-	-	10m
216 – 230 MHz	46.4	-	-	10m
230 – 960 MHz	47	-	-	10m
960 – 1000 MHz	49.5	-	-	10m
1000-6000MHz	-	80	60	3m

☒ Class B in open area test site

Frequency Bands/frequencies	dB (μV/m) quasi-peak	dB (μV/m) peak	dB (μV/m) average	Distance
30-88MHz	30	-	-	10m
88 – 216MHz	33.1	-	-	10m
216 – 230 MHz	35.6	-	-	10m
230 – 960 MHz	37	-	-	10m
960 – 1000 MHz	43.5	-	-	10m
1000-6000MHz	-	74	54	3m




3.5. TEST EQUIPMENT LIST

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
OATS	-	-	F2000400	2022/02	2023/02
Receiver	ROHDE & SCHWARZ	ESIB	A2642021	2021/02	2023/02
Preamplifier	BONN	BLNA 3018-8F305	A7080053	2021/11	2023/11
Antenna bilog	CHASE	CBL 6112A	C2040040	2021/04	2023/04
Horn antenna	ETS	3115	C2042016	2021/04	2023/04
Cable	-	-	A5330032	2022/08	2023/08
Cable	-	-	A5329449	2022/11	2023/11
Cable			A4529577	2022/06	2023/06
Software V3.19.1.21	NEXIO	BAT-EMC	-	-	-

3.6. RESULTS

Diagram N°1
Mode 1
Vertical & horizontal Polarization (30MHz-1GHz)

— ICES 003 - Classe:B - Q-Peak/10.0m/
 — FCC Part 15 class B (unintentional radiator) §109 - Classe:- - QCrête/10.0m/
 • Q-Peak (Mes. Q-Peak) (Verticale)
 • Q-Peak (Mes. Q-Peak) (Horizontale)

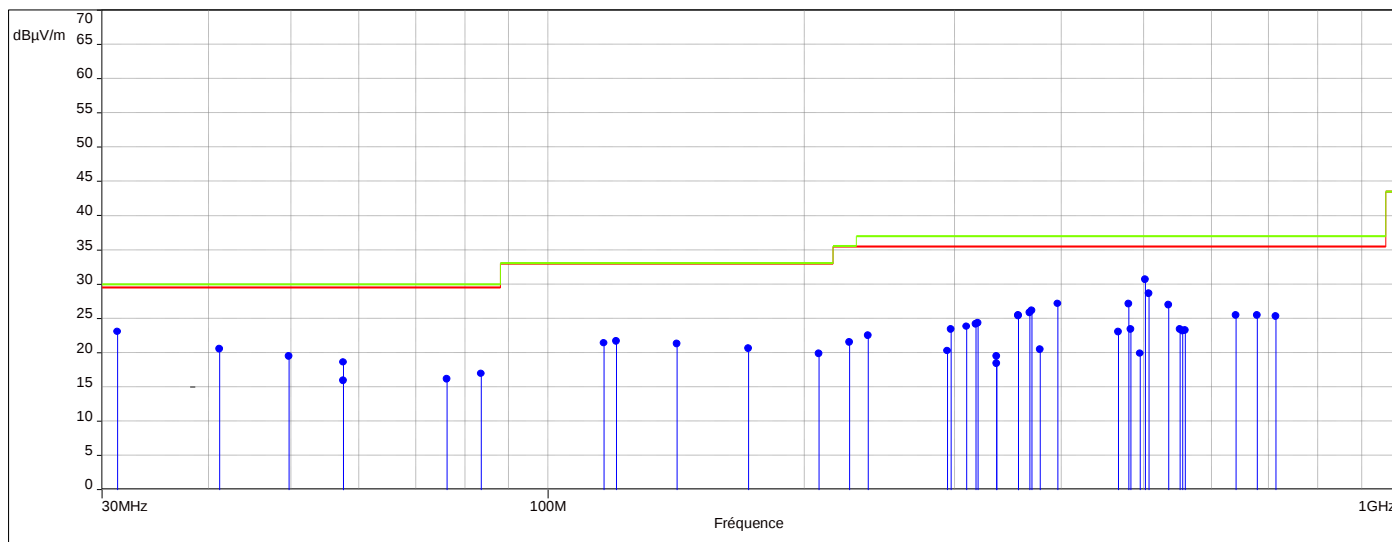


	Frequency (MHz)	level (dBµV/m)	limit ICES 003 class B	Margin ICES 003 class B	limit FCC class B	Margin Fcc Part class B
Vertical	31.3	23.06	30	6.94	29.5	6.44
Vertical	356	25.41	37	11.59	35.5	10.09
Vertical	501.9	30.68	37	6.32	35.5	4.82
Vertical	534.6	26.98	37	10.02	35.5	8.52
Horizontal	369.2	26.11	37	10.89	35.5	9.39
Horizontal	396	27.16	37	9.84	35.5	8.34
Horizontal	480.1	27.11	37	9.89	35.5	8.39
Horizontal	506.7	28.62	37	8.38	35.5	6.88



Diagram N°1
Mode 3
Vertical & horizontal Polarization (30MHz-1GHz)

- ICES 003 - Classe:B - Q-Peak/10.0m/
- FCC Part 15 class B (unintentional radiator) §109 - Classe:- - QCrête/10.0m/
- Q-Peak (Mes. Q-Peak) (Verticale)
- Q-Peak (Mes. Q-Peak) (Horizontale)
- Q-Peak (Mes. Q-Peak) (Verticale)
- Q-Peak (Mes. Q-Peak) (Horizontale)

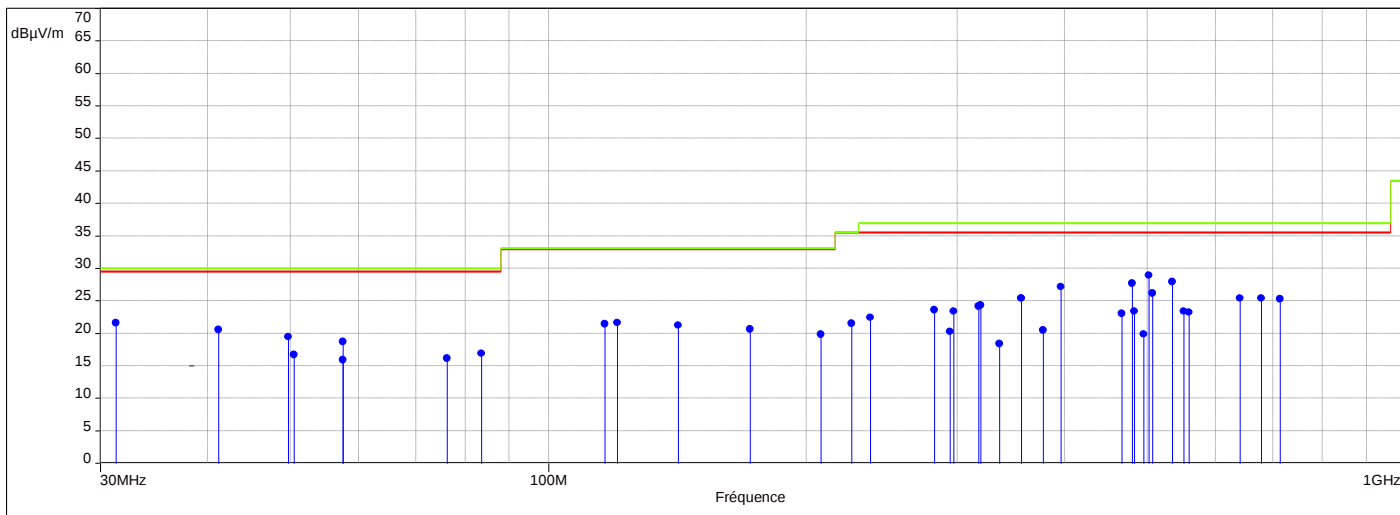

	Frequency (MHz)	level (dBμV/m)	limit ICES 003 class B	Margin ICES 003 class B	limit FCC class B	Margin Fcc Part class B
Vertical	31.3	21.57	30	8.43	29.5	7.93
Vertical	282.2	23.54	37	13.46	35.5	11.96
Vertical	501.9	28.93	37	8.07	35.5	6.57
Vertical	534.6	27.88	37	9.12	35.5	7.62
Horizontal	50.5	16.72	30	13.28	29.5	12.78
Horizontal	396	27.16	37	9.84	35.5	8.34
Horizontal	480.1	27.67	37	9.33	35.5	7.83
Horizontal	506.7	26.19	37	10.81	35.5	9.31



3.7. CONCLUSION

Measures of Radiated Emission, performed on the sample of the product FAMA LITE, SN: AD-FOA07-0822455, in configuration and description presented in this test report, show levels conform to the FCC part 15 & ICES -003 limits.



4. Measurement of conducted disturbance

4.1. ENVIRONMENTAL CONDITIONS

Test performed by : **Laurent Deneux**
Date of test : January 30, 2023
Ambient temperature : 20°C
Relative humidity : 45%

4.2. TEST SETUP

Specifications:

Frequency 0.15 – 30 MHz RBW 9 kHz
Detector Peak , Quasi Peak and average

The measurement is performed on power supply with a LISN and telecommunication lines with RSI or current clamp for shielded cables.

Operating conditions:

- Deviation method:

☐ Yes

☒ No

-Product installation:


☒ The EUT is installed on a wooden table 80 cm above the reference plane, at 80cm of the LISN and at 40cm of the vertical conductive wall

☐ The EUT is installed on a wooden table 40 cm above the reference plane, at 80cm of the LISN.

☐ The EUT is installed 10 cm above the reference plane, at 80cm of the LISN..

Operating mode:

☒ Mode 1 ☒ Mode 2 ☐ Mode 3 ...

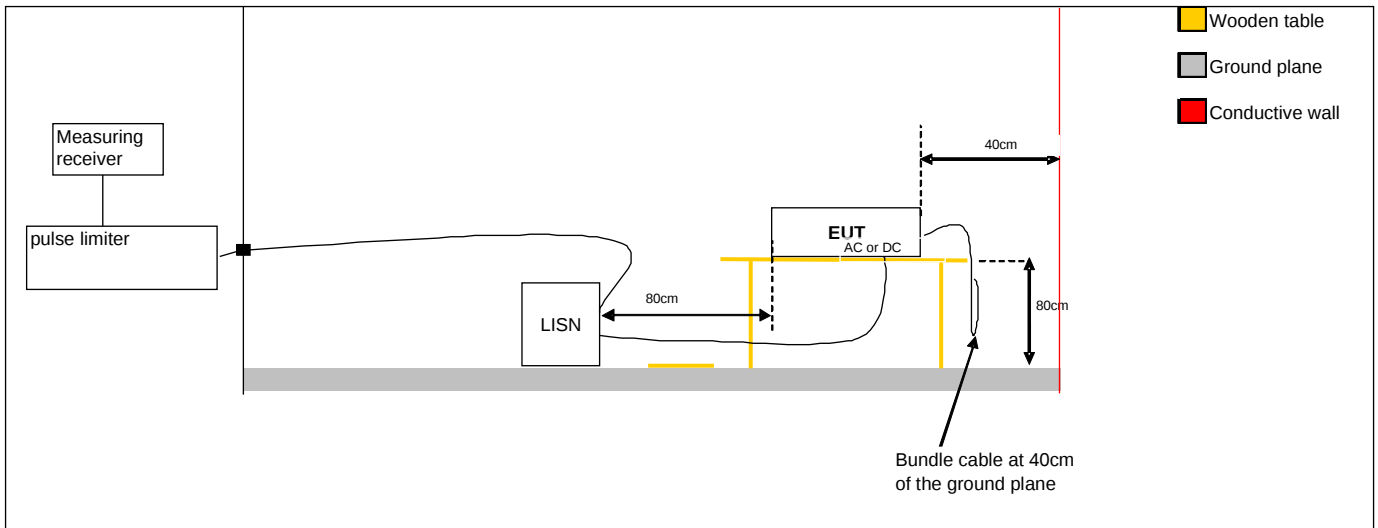

Test set up of conducted emission on power supply



Test set up of conducted emission on power supply



Test set up of conducted emission on power supply



4.3. LIMIT

☐ Power supply Class A

Frequency Bands/frequencies	dB (µV/m) quasi-peak	dB (µV/m) average
0.15-0.5MHz	79	66
0.5-30 MHz	73	60

☒ Power supply Class B

Frequency Bands/frequencies	dB (µV/m) quasi-peak	dB (µV/m) average
0.15-0.5MHz	66-56	56-46
0.5-5 MHz	56	46
5-30 MHz	60	50


4.4. TEST EQUIPMENT LIST

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Receiver	ROHDE & SCHWARZ	ESIB	A2642021	2021/02	2023/02
Limiter	ROHDE & SCHWARZ	ESH3-Z2	A2649008	2022/06	2024/06
Network V / V ISLN	ROHDE & SCHWARZ	ESH2-Z5	C2322002	2022/10	2023/11
Absorber cable	LCIE	-	A5329589	2021/11	2023/11
Cable N(6m)	-	-	A5329417	2022/11	2023/11
Power supply	DANA	DSC5000	A7044076	-	-
Software V3.19.1.21	NEXIO	BAT-EMC	-	-	-

4.5. RESULTS

Diagram N°1


Phase 240V/50Hz

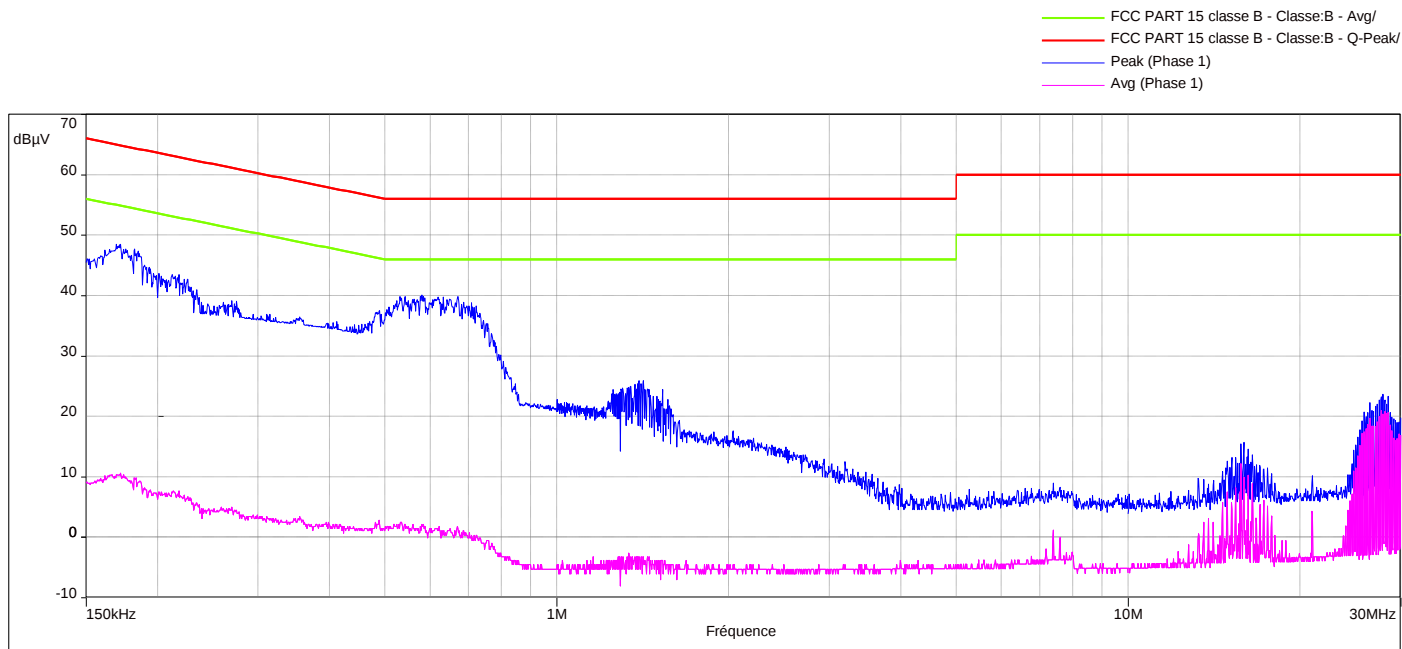

Frequency (MHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Margin peak/Quasi Peak (dB)	Average Level (dBμV)	Average Limit (dBμV)	Margin Avg/Avg (dB)
0.172	47.8	-	64.7	16.9	10.3	54.7	44.4
0.582	39.4	-	56	16.6	1.8	46	44.2
1.4	25.4	-	56	30.6	-3.8	46	49.8
15.75	15.4	-	60	44.6	12	50	38
27.73	22.7	-	60	37.3	20.9	50	29.1



Diagram N°2
Neutral 240V/50Hz

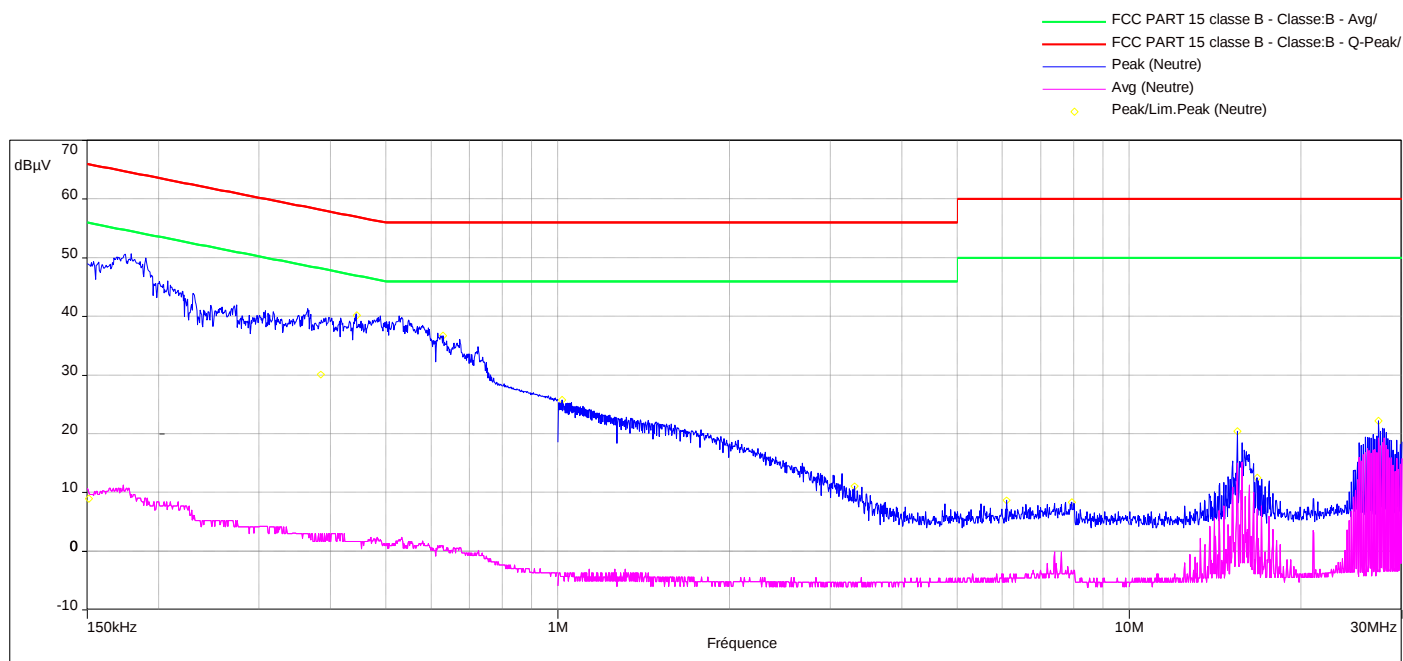


Frequency (MHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Margin peak/Quasi Peak (dB)	Average Level (dBμV)	Average Limit (dBμV)	Margin Avg/Avg (dB)
0.172	50	-	64.7	14.7	11.2	54.7	43.5
0.525	39.2	-	56	16.8	1.7	46	44.3
1.478	21.8	-	56	34.2	-5	46	51
15.46	20.45	-	60	39.55	15	50	35
27.31	22.24	-	60	37.76	19	50	31



Diagram N°3

Phase 120/60Hz

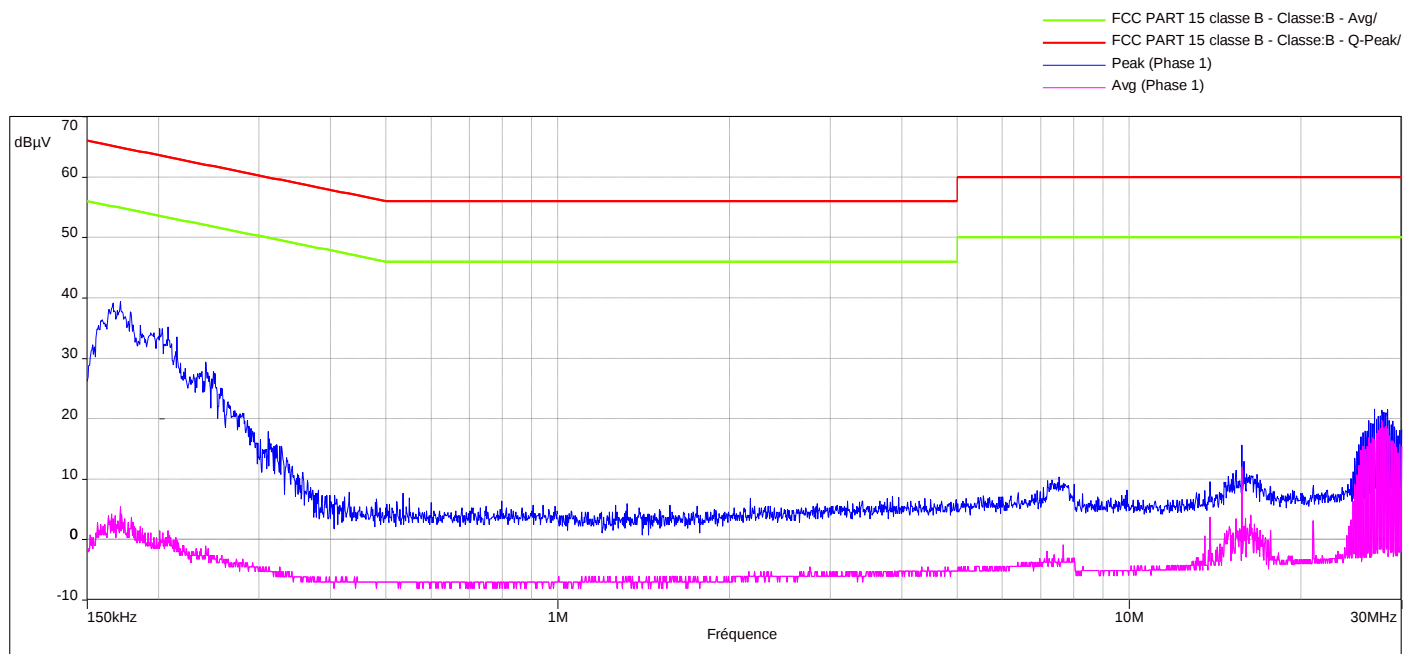


Frequency (MHz)	Peak Level (dBµV)	Quasi-Peak Level (dBµV)	Quasi-Peak Limit (dBµV)	Margin peak/Quasi Peak (dB)	Average Level (dBµV)	Average Limit (dBµV)	Margin Avg/Avg (dB)
0.172	39.4	-	64.7	25.3	5.4	54.7	49.3
0.536	15.7	-	56	40.3	-7	46	53
7.67	10.2	-	56	45.8	-0.9	46	46.9
15.75	15.5	-	60	44.5	12	50	38
27.72	21.5	-	60	38.5	19.6	50	30.4



Diagram N°4

Neutral 120/60Hz

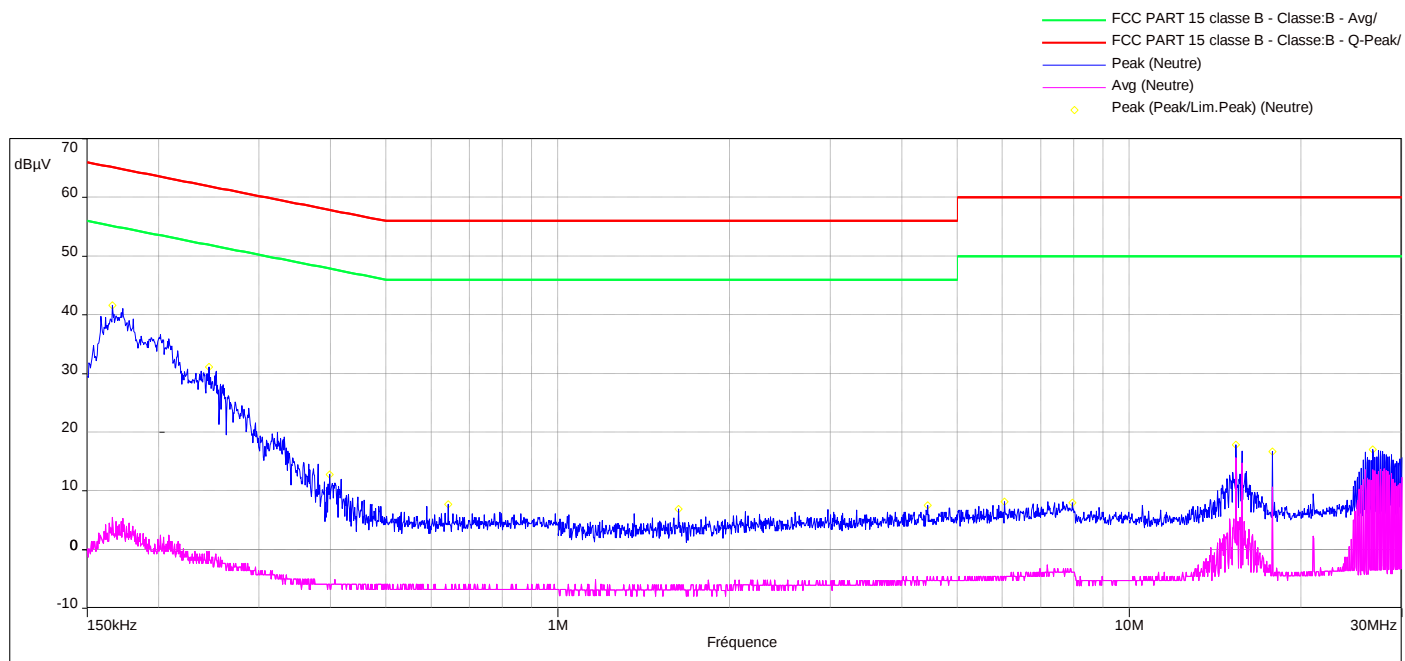

Frequency (MHz)	Peak Level (dBµV)	Quasi-Peak Level (dBµV)	Quasi-Peak Limit (dBµV)	Margin peak/Quasi Peak (dB)	Average Level (dBµV)	Average Limit (dBµV)	Margin Avg/Avg (dB)
0.166	41.64	-	64.7	23.06	5.5	54.7	49.2
0.642	7.7	-	56	48.3	-6.8	46	52.8
15.37	17.8	-	56	38.2	15.37	46	30.63
17.79	16.7	-	60	43.3	110.67	50	-60.67
27.31	16.2	-	60	43.8	13.3	50	36.7



4.6. CONCLUSION

Measures of Conducted Emission, performed on the sample of the product FAMA LITE, SN: AD-FOA07-0822455, in configuration and description presented in this test report, show levels conform to the FCC part 15 & ICES -003 limits.



5. Uncertainties Chart

Kind of measurement	Wide uncertainty laboratory (k=2) $\pm x$ (dB)	CISPR uncertainty limit $\pm y$ (dB)
Measurement of conducted disturbances in voltage on the AC power port (9 kHz – 150 kHz)	3.68	3.8
Measurement of conducted disturbances in voltage on the AC power port (150 kHz – 30 MHz)	3.22	3.4
Measurement of conducted disturbances in Capacitive voltage (150 kHz – 30 MHz)	3.69	3.9
Measurement of conducted disturbances in voltage AAN avec aLCL = 55 ... 40 dBc	4.15	4.2
Measurement of conducted disturbances in voltage AAN avec aLCL = 65 ... 50 dBc	4.54	4.59
Measurement of conducted disturbances in voltage AAN avec aLCL = 75 ... 60 dBc	4.97	5.03
Measurement of conducted disturbances in current (current clamp)	2.9	2.9
Measurement of disturbance power	4.31	4.5
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC	4.48	/
Measurement of radiated electric field from 30 to 1000MHz in horizontal position on OATS & SAC	5.79	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position on OATS & SAC at 3m	6.3	6.3
Measurement of radiated electric field from 6 to 18GHz	5.36	5.5
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in OATS at 10m	5.7	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in in OATS at 10m	5.61	6.3
Measurement of radiated electric field from 1 to 6 GHz	4.98	5.2
Measurement of radiated magnetic field from 10kHz to 30MHz on the OATS (Ecuelles)	4.48	/
Measurement of current harmonics	11.11%	/
Measurement of Flicker	9.26%	/
Immunity to radiated. radio-frequency. electromagnetic field in SAC C01 (80MHz-1GHz)	2.26	/
Immunity to radiated. radio-frequency. electromagnetic field in SAC C01 (1-6GHz)	2.42	/
Immunity to radiated. radio-frequency. electromagnetic field in SAC V01 (80MHz-1GHz)	2.5	/
Immunity to radiated. radio-frequency. electromagnetic field in SAC V01 (1-6GHz)	2.64	/
Immunity to radiated. radio-frequency. electromagnetic field in SAC V05 (80MHz-1GHz)	2.27	/
Immunity to radiated. radio-frequency. electromagnetic field in SAC V05 (1-6GHz)	2.64	/

End of test report

AUTO CONTROL

1. Measurement of radiated emissions

Polarity antenna	Frequency MHz	Level measured dB μ V/m
Vertical	65	39.4
Vertical	115	49
Vertical	515	48.4
Vertical	900	38.8

2. Measurement of conducted disturbance

