

Appendix B

Detailed Test Results

GSM850 for Head, Body & Limbs
GSM1900 for Head, Body & Limbs
WCDMA Band II for Head, Body & Limbs
WCDMA Band IV for Head, Body & Limbs
WCDMA Band V for Head, Body & Limbs
LTE Band 2 for Head, Body & Limbs
LTE Band 7 for Head, Body & Limbs
LTE Band 12 for Head, Body & Limbs
LTE Band 13 for Head, Body & Limbs
LTE Band 26 for Head, Body & Limbs
LTE Band 38 for Head, Body & Limbs
LTE Band 41 for Head, Body & Limbs
LTE Band 66 for Head, Body & Limbs
n2 for Head, Body & Limbs
n7 for Head, Body & Limbs
n12 for Head, Body & Limbs
n26 for Head, Body & Limbs
n38 for Head, Body & Limbs
n41 for Head, Body & Limbs
n66 for Head, Body & Limbs
WIFI 2.4G for Head, Body & Limbs
WIFI 5G for Head, Body & Limbs
WIFI 6E for Head, Body & Limbs
BT for Head, Body & Limbs



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6E WIFI for Power Density



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Technical Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Laboratory: SGS-SAR Lab

CPH2697 GSM850 GPRS 4TS 251CH Left cheek Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 848.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 43.114$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.808 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.617 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.870 W/kg ; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

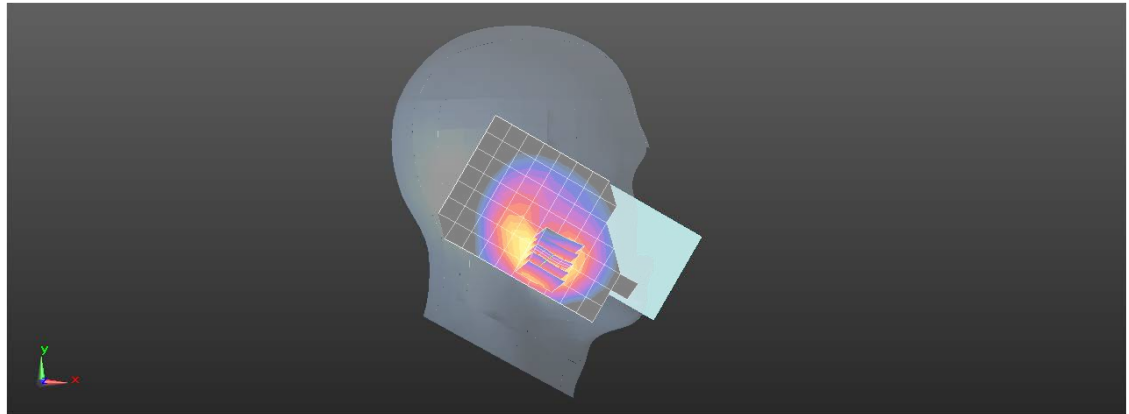

0 dB = 1.02 W/kg = 0.09 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 GSM850 GPRS 4TS 190CH Back side 15mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 43.184$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.647 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.16 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.609 W/kg

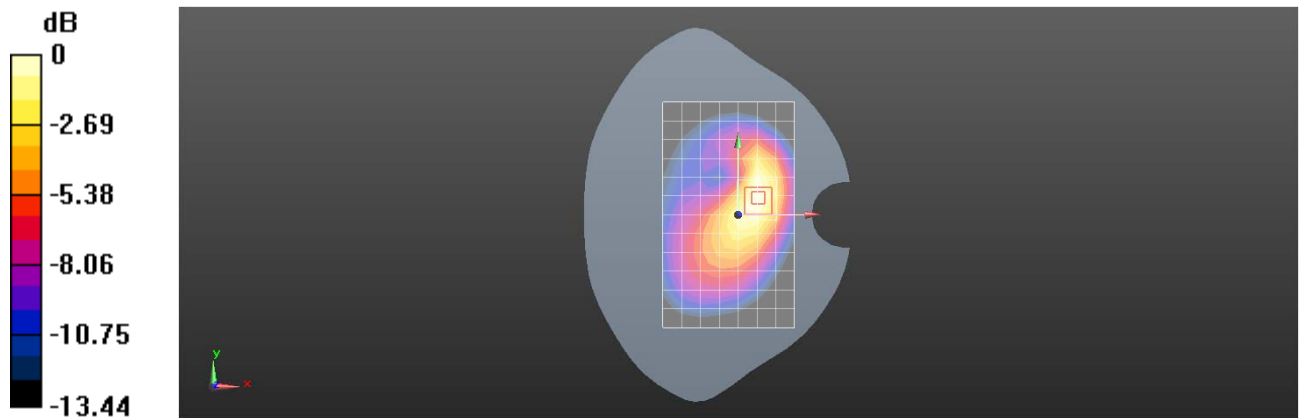

0 dB = 0.609 W/kg = -2.15 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 GSM 850 GPRS 4TS 128CH Left side 10mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 43.271$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.52 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.432 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

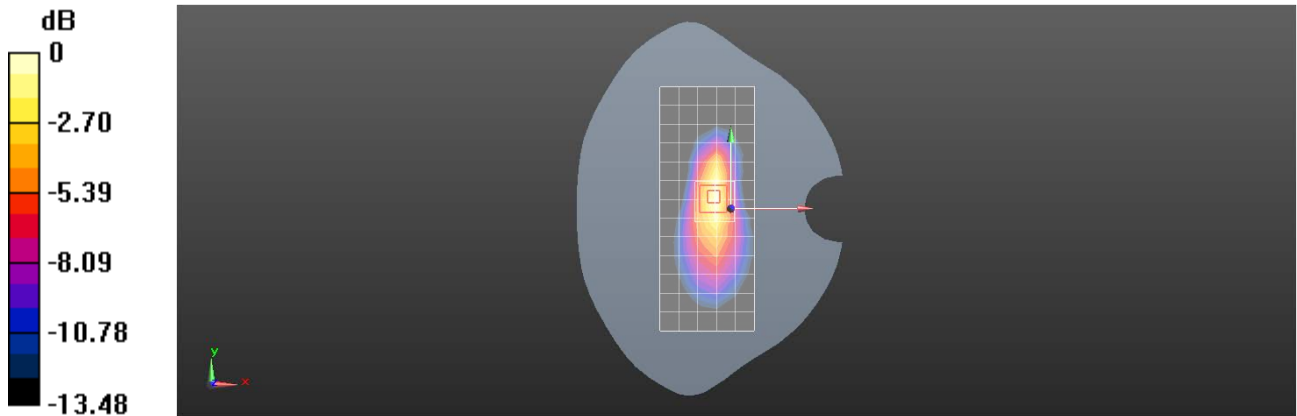

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 GSM 850 GPRS 4TS 190CH Left side 0mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028090

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 43.184$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.66 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 36.17 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 3.76 W/kg ; SAR(10 g) = 1.57 W/kg

Maximum value of SAR (measured) = 8.55 W/kg

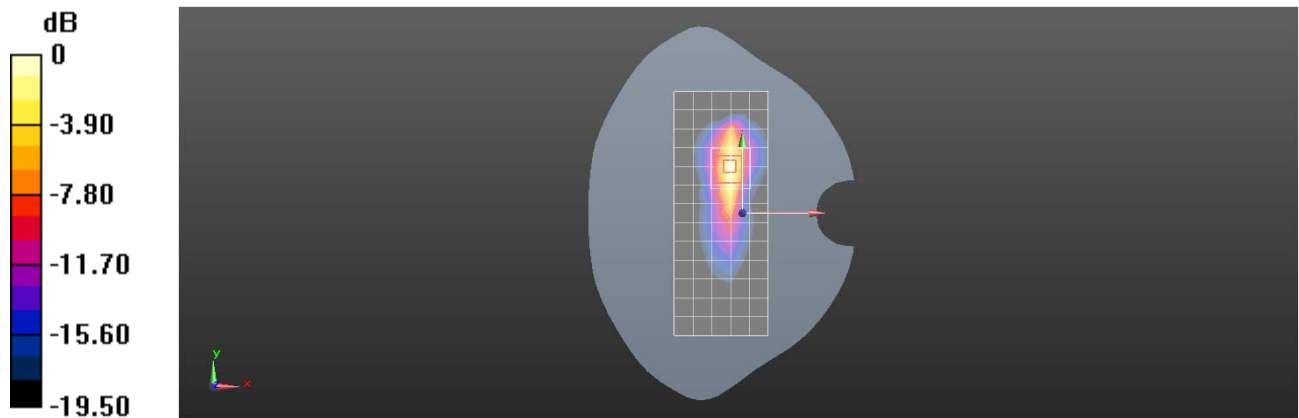

0 dB = 8.55 W/kg = 9.32 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 GSM1900 GPRS 4TS 810CH Right tilted Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1910$ MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 39.912$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.946 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.52 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

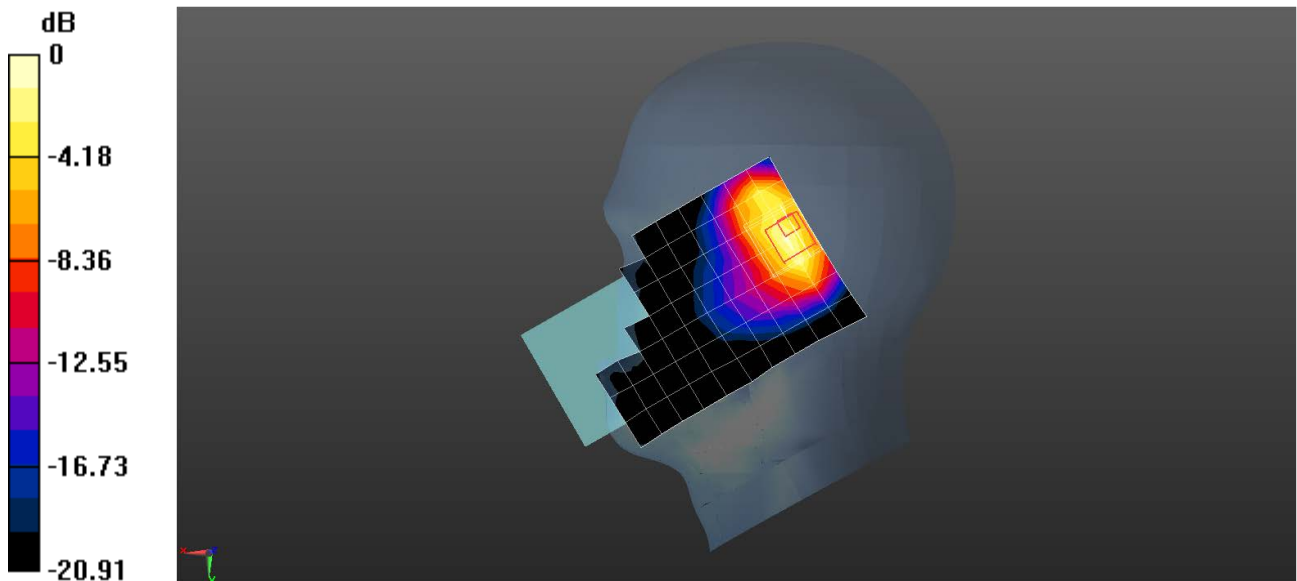

0 dB = 1.13 W/kg = 0.53 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 GSM1900 GPRS 4TS 661CH Back side 15mm Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 39.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.300 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.740 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.309 W/kg



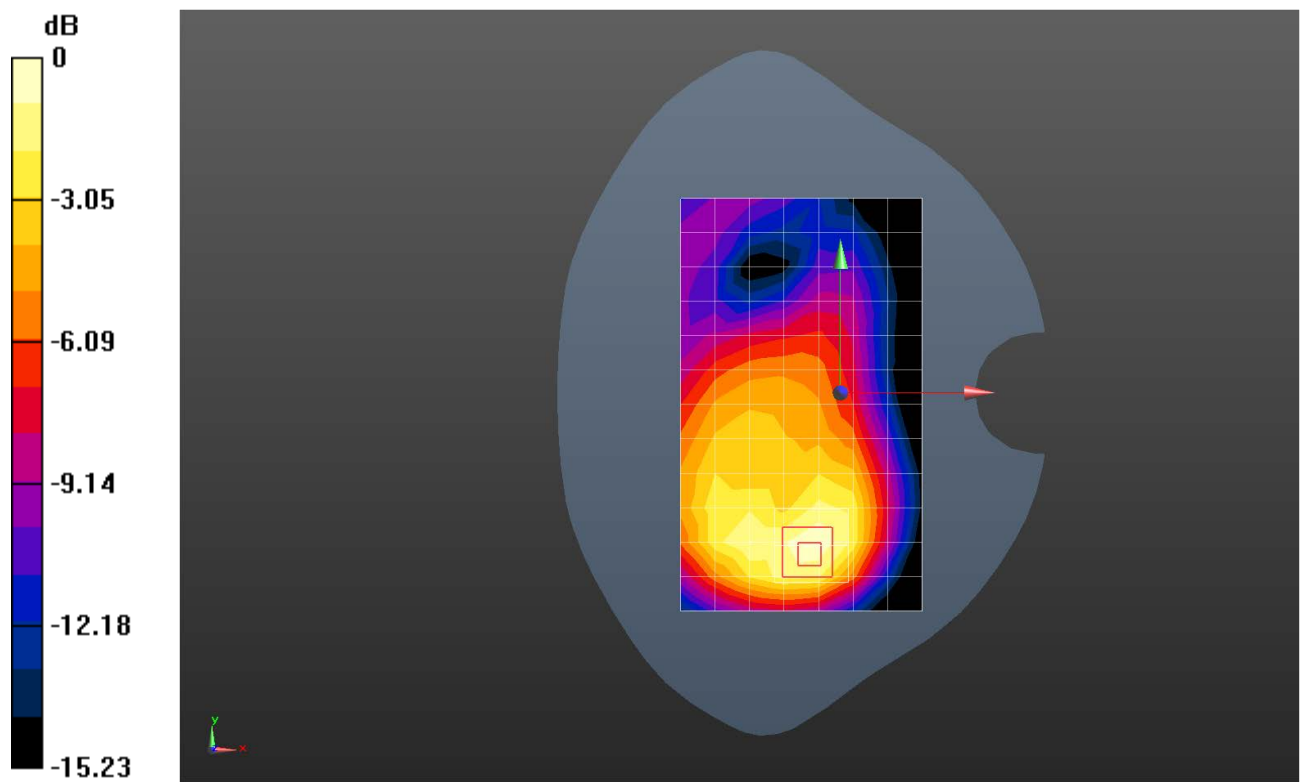

0 dB = 0.309 W/kg = -5.10 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 GSM1900 GPRS 4TS 661CH Bottom side 10mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.427 \text{ S/m}$; $\epsilon_r = 39.985$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.617 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.17 V/m ; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.878 W/kg

SAR(1 g) = 0.482 W/kg ; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.736 W/kg



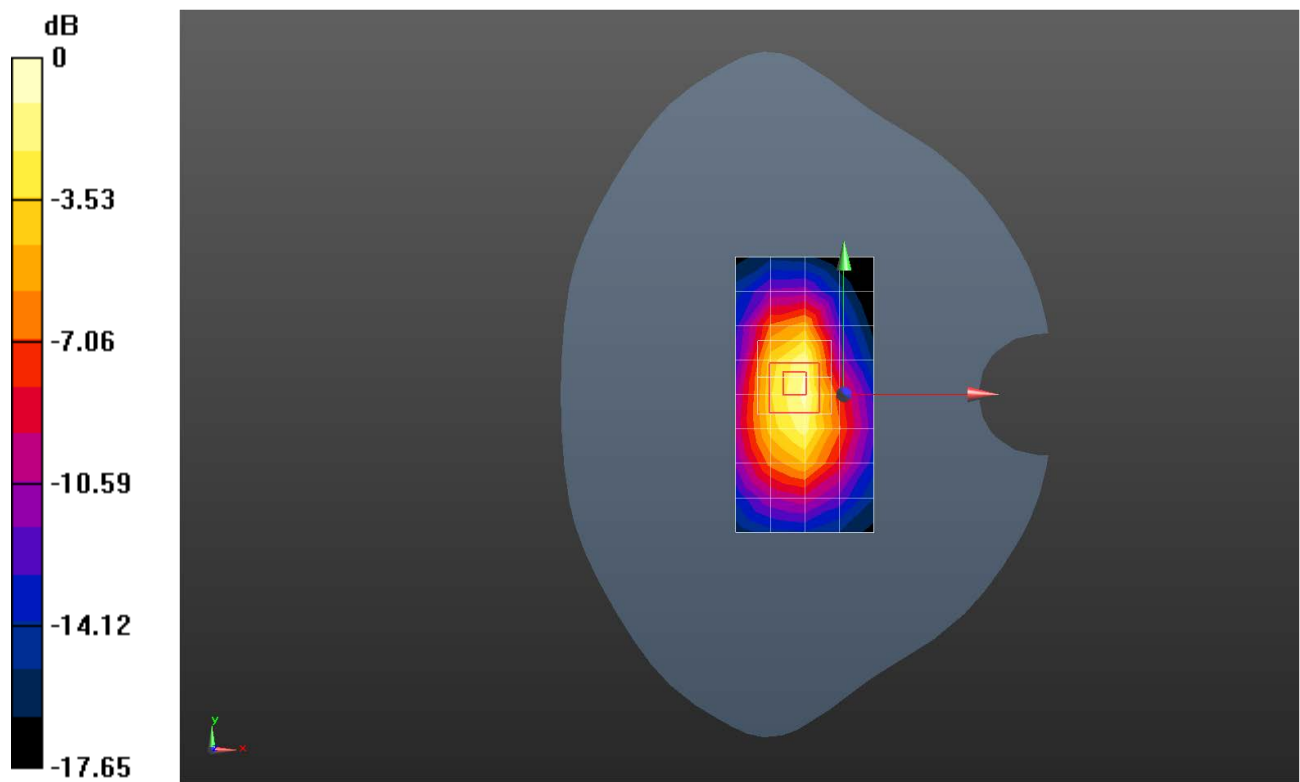

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA Band V RMC 4132CH Left cheek Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 43.252$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.671 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.152 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 0.900 W/kg

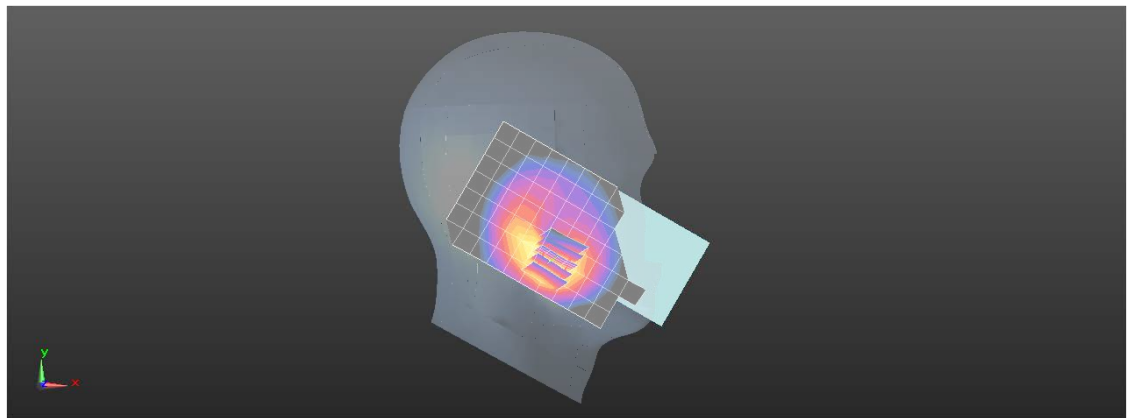

0 dB = 0.900 W/kg = -0.46 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA Band V RMC 4182CH Back side 15mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 43.187$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm.

Maximum value of SAR (measured) = 0.418 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.28 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.428 W/kg

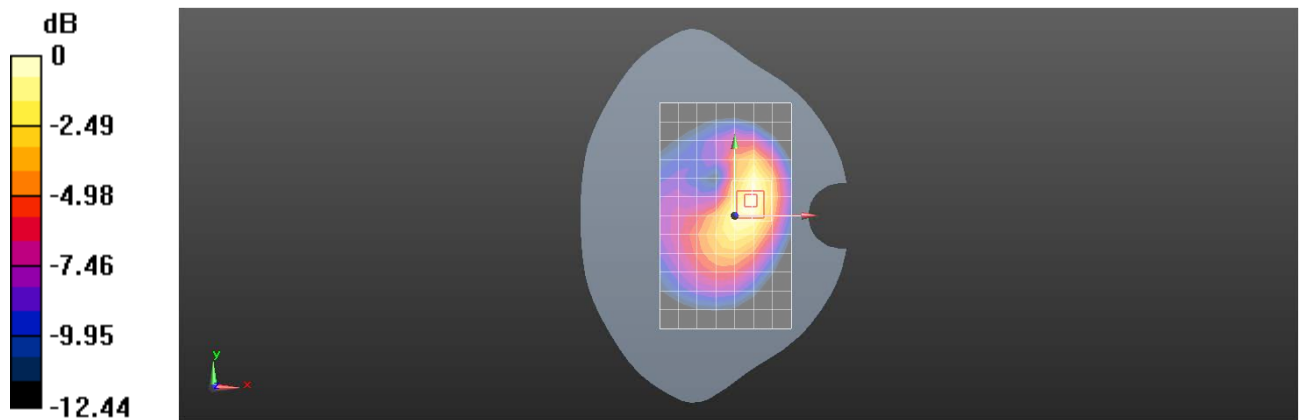

0 dB = 0.428 W/kg = -3.69 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA Band V RMC 4182CH Left side 10mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 43.187$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.502 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.68 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.647 W/kg

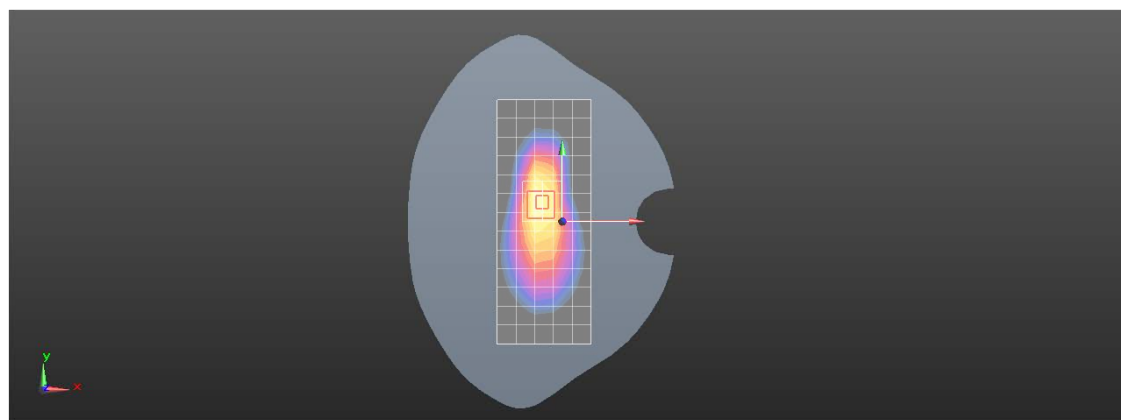

0 dB = 0.647 W/kg = -1.89 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA II RMC 9400CH Right tilted Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.359 \text{ S/m}$; $\epsilon_r = 40.313$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.65 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.43 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.899 W/kg ; SAR(10 g) = 0.428 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

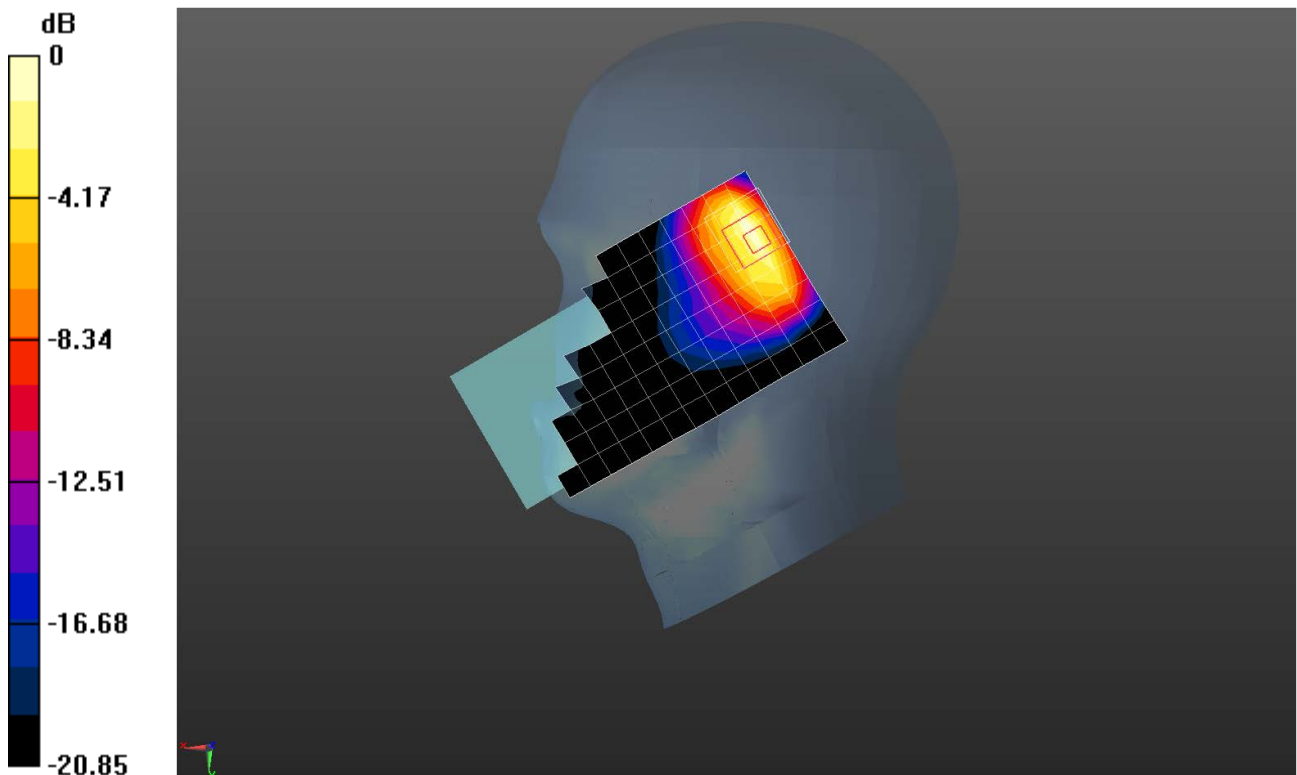

$$0 \text{ dB} = 1.65 \text{ W/kg} = 2.17 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA II RMC 9400CH Back side 15mm Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1


Medium: HSL1900;Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.359 \text{ S/m}$; $\epsilon_r = 40.313$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.297 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 6.714 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.370 W/kg
SAR(1 g) = 0.214 W/kg ; SAR(10 g) = 0.127 W/kg
Maximum value of SAR (measured) = 0.312 W/kg

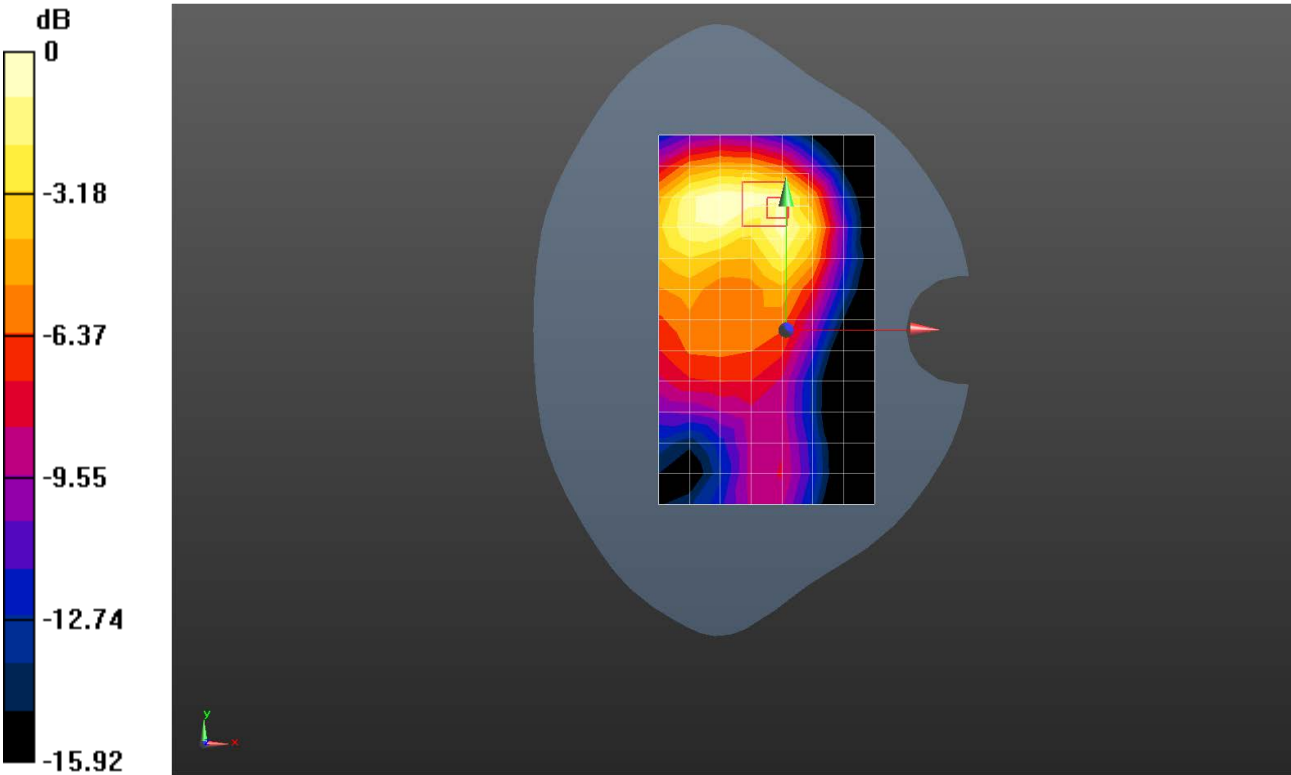

$$0 \text{ dB} = 0.312 \text{ W/kg} = -5.06 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA II RMC 9400CH Top side 10mm Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 40.313$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.536 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.28 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.605 W/kg

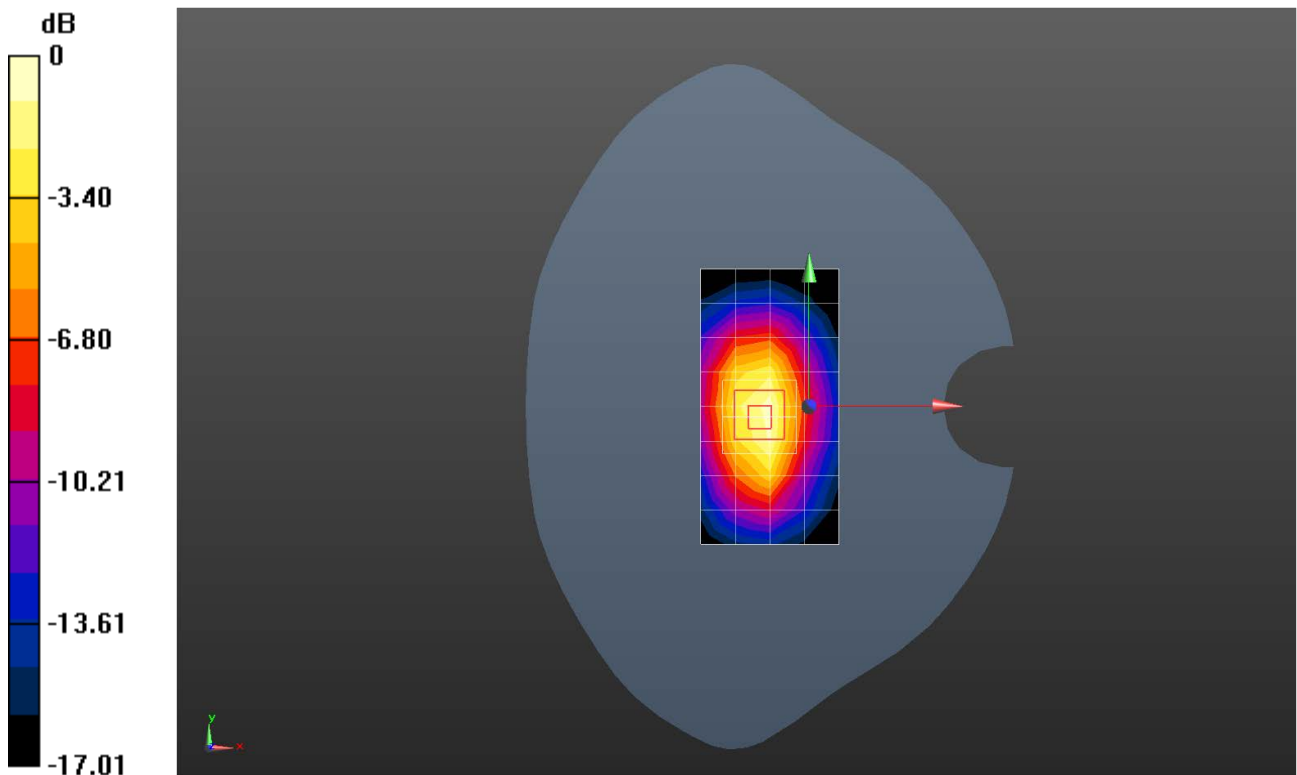

$$0 \text{ dB} = 0.605 \text{ W/kg} = -2.18 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA IV RMC 1412CH Right cheek Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.335$ S/m; $\epsilon_r = 40.386$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.962 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.89 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.342 W/kg

Maximum value of SAR (measured) = 0.949 W/kg

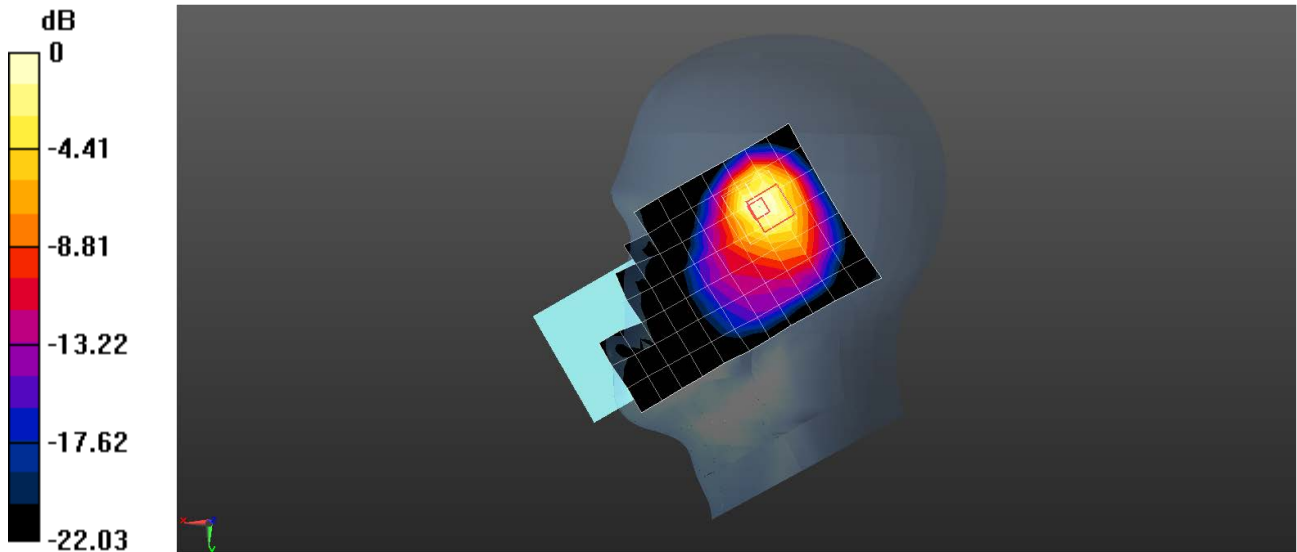

0 dB = 0.949 W/kg = -0.23 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA IV RMC 1412CH Back side 15mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.335$ S/m; $\epsilon_r = 40.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.336 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.484 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.324 W/kg

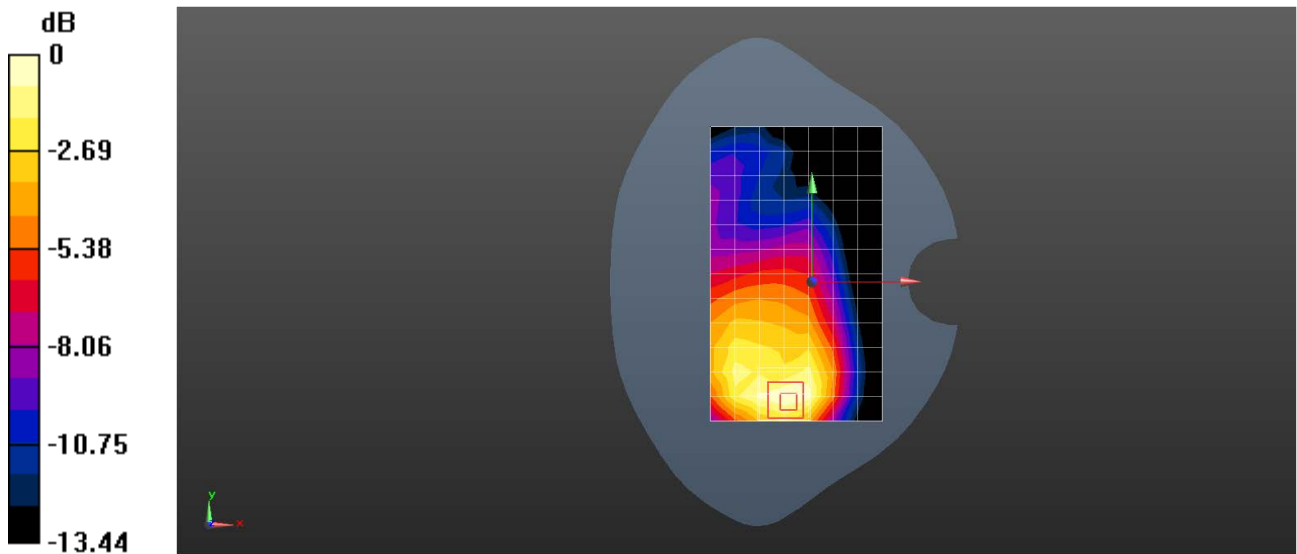

0 dB = 0.324 W/kg = -4.89 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WCDMA IV RMC 1412CH Bottom side 10mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.335$ S/m; $\epsilon_r = 40.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.403 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.50 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.660 W/kg

SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.560 W/kg

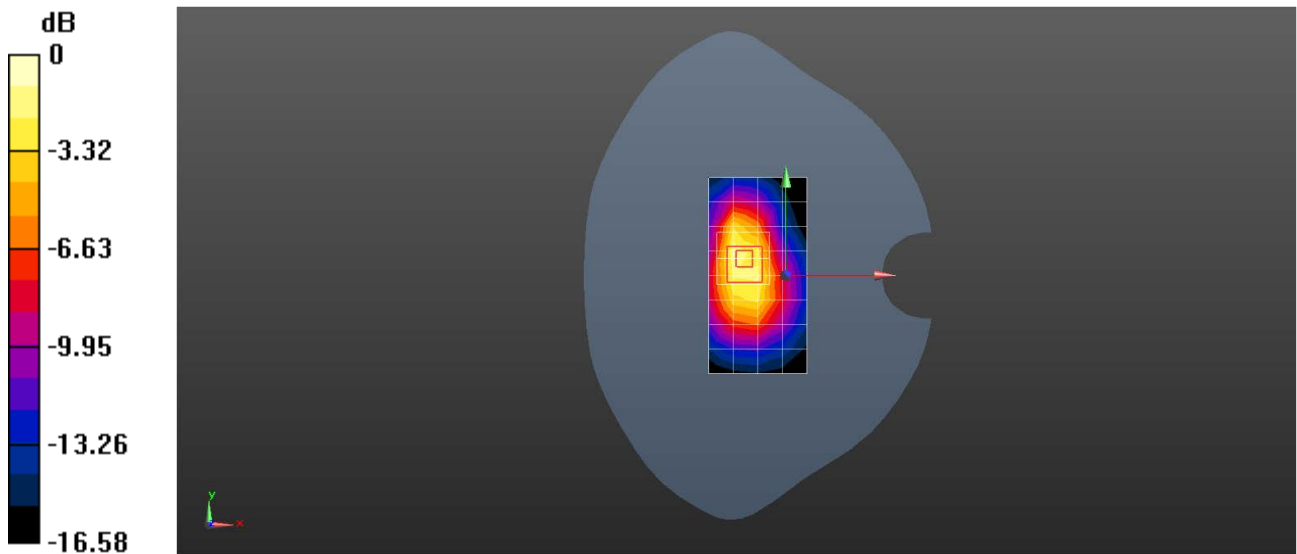

0 dB = 0.560 W/kg = -2.52 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 2 20M QPSK 50RB50 19100CH Right tilted Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.141$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.59 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.05 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.440 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

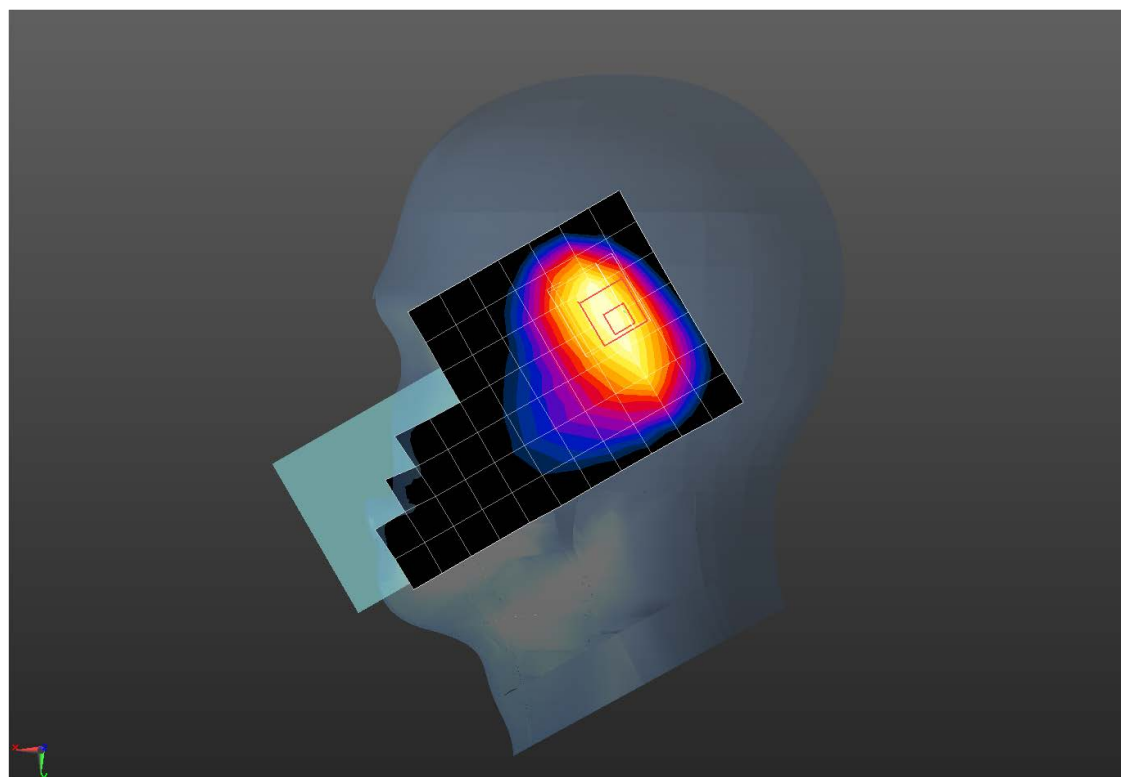

$$0 \text{ dB} = 1.33 \text{ W/kg} = 1.24 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 2 20M QPSK 1RB0 18900CH Back side 15mm Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 40.174$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.303 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.628 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

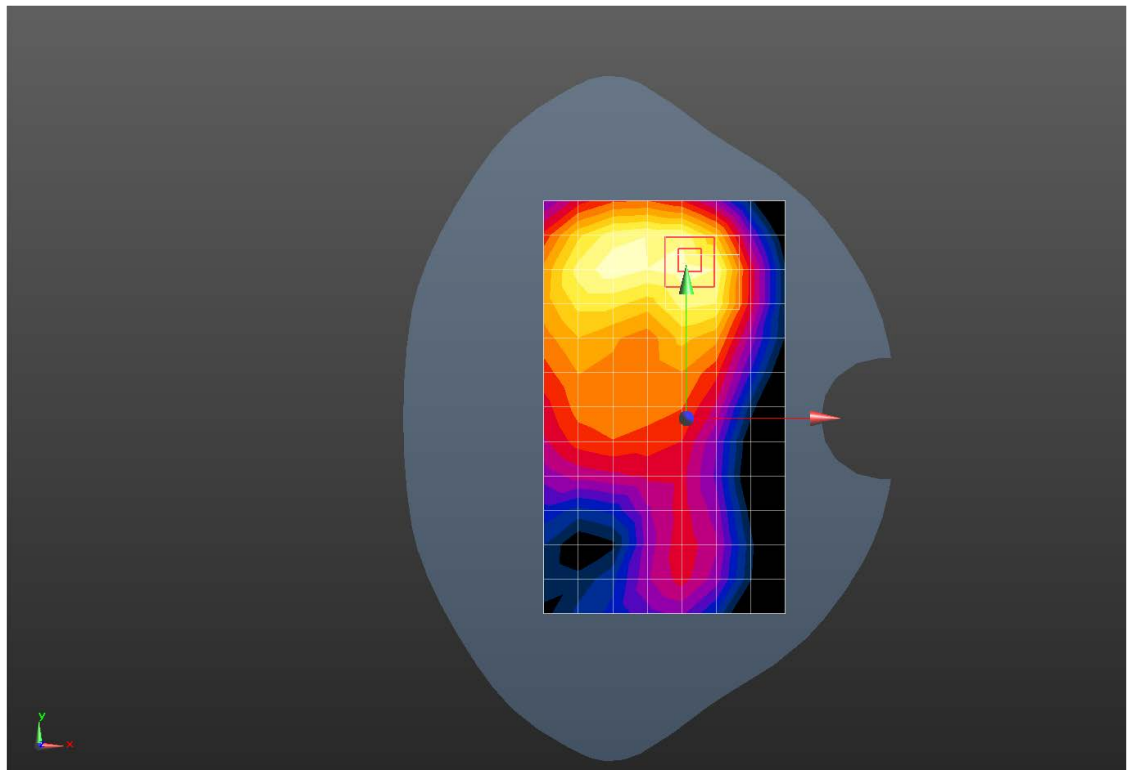

$$0 \text{ dB} = 0.332 \text{ W/kg} = -4.79 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 2 20M QPSK 1RB99 18700CH Bottom side 10mm Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 40.184$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.684 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.17 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.818 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.688 W/kg

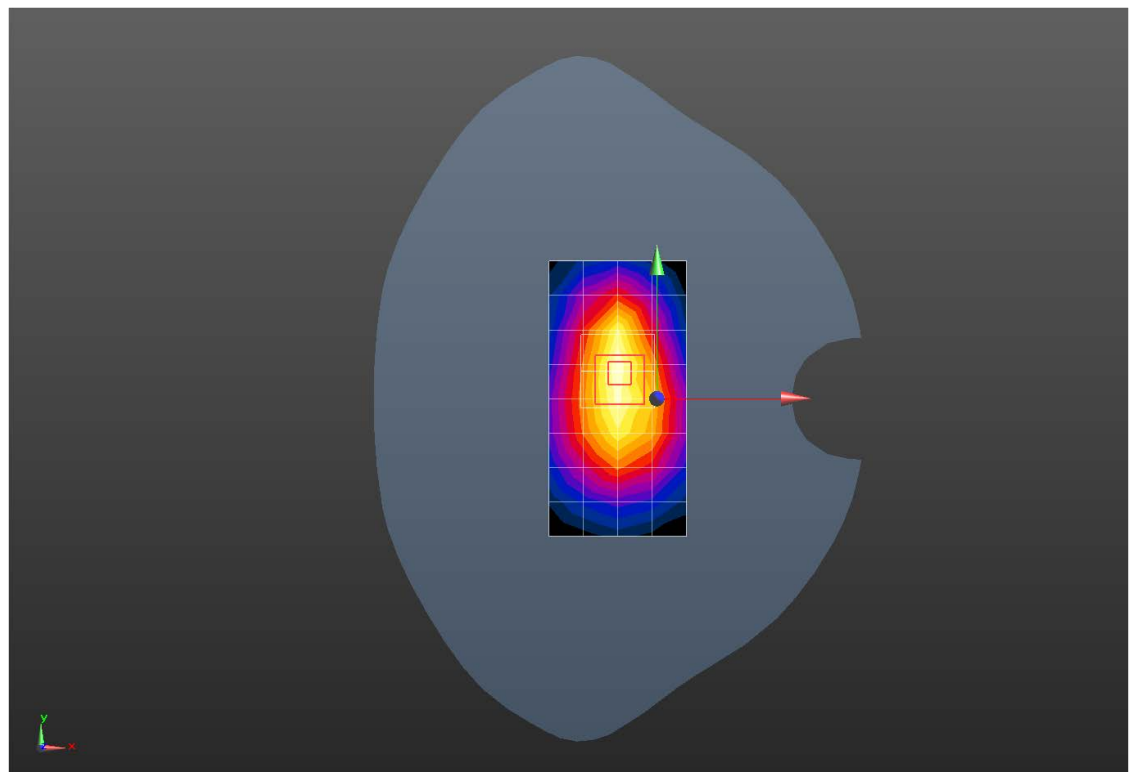

$$0 \text{ dB} = 0.688 \text{ W/kg} = -1.62 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 7 20M QPSK 1RB0 20850CH Right cheek Ant11

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027696

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2510$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 39.821$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.64 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.331 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.934 W/kg; SAR(10 g) = 0.380 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

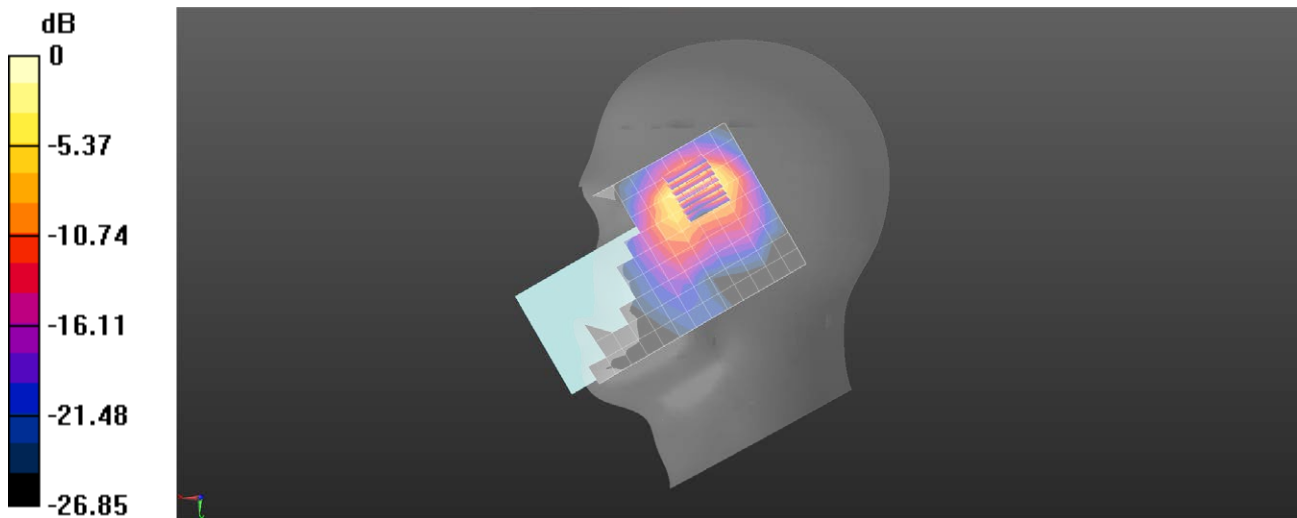

0 dB = 1.82 W/kg = 2.60 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 7 20M QPSK 50RB0 21100CH Back side 15mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2535$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.423 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.561 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

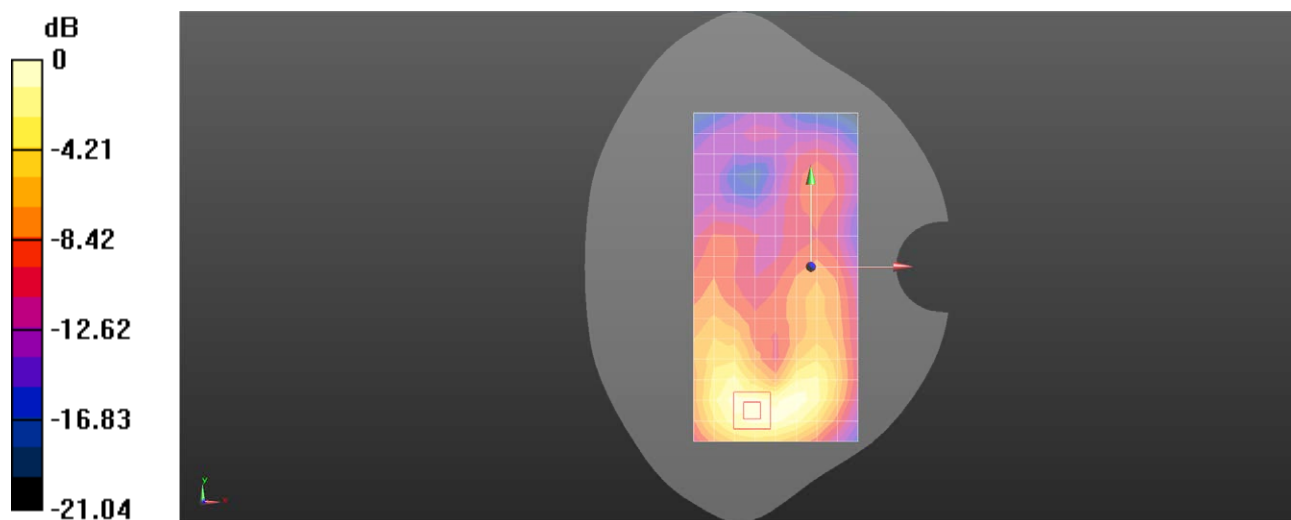

0 dB = 0.472 W/kg = -3.26 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 7 20M QPSK 1RB0 21100CH Top side 10mm Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 39.756$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.656 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.14 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.744 W/kg

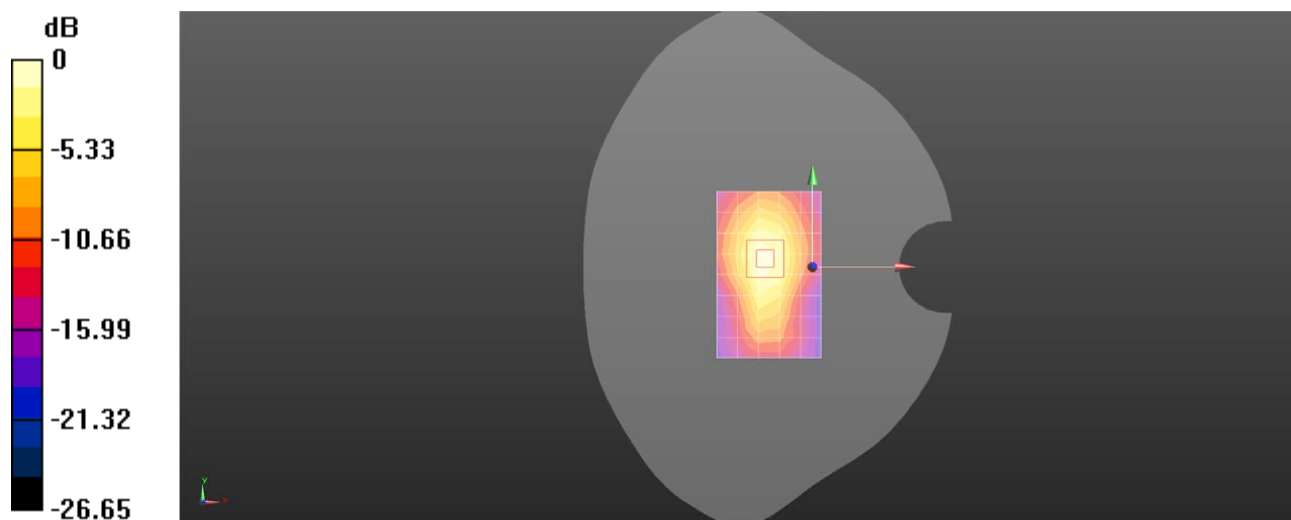

0 dB = 0.744 W/kg = -1.28 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 12 10M QPSK 1RB49 23130CH Left cheek Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.865 \text{ S/m}$; $\epsilon_r = 42.912$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.17 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.955 V/m ; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.899 W/kg ; SAR(10 g) = 0.490 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

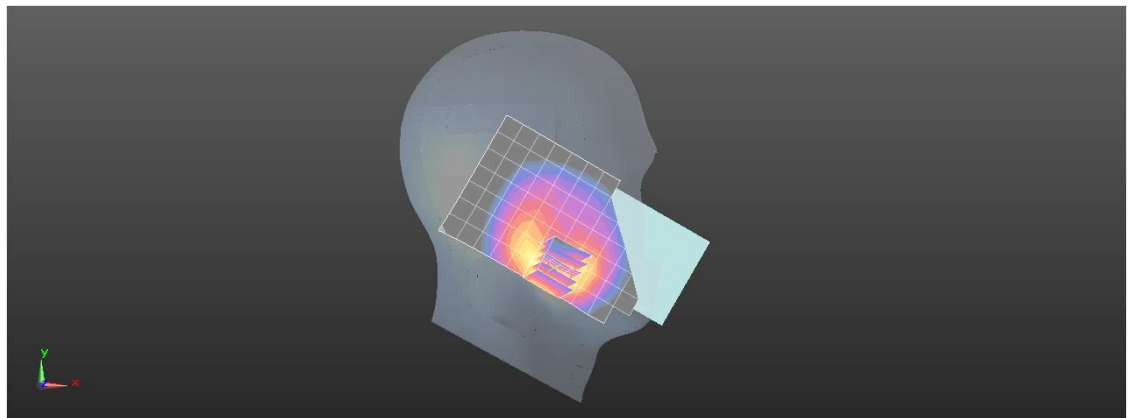

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 12 10M QPSK 25RB25 23130CH Back side 15mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.865 \text{ S/m}$; $\epsilon_r = 42.912$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.332 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.58 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.258 W/kg ; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.335 W/kg

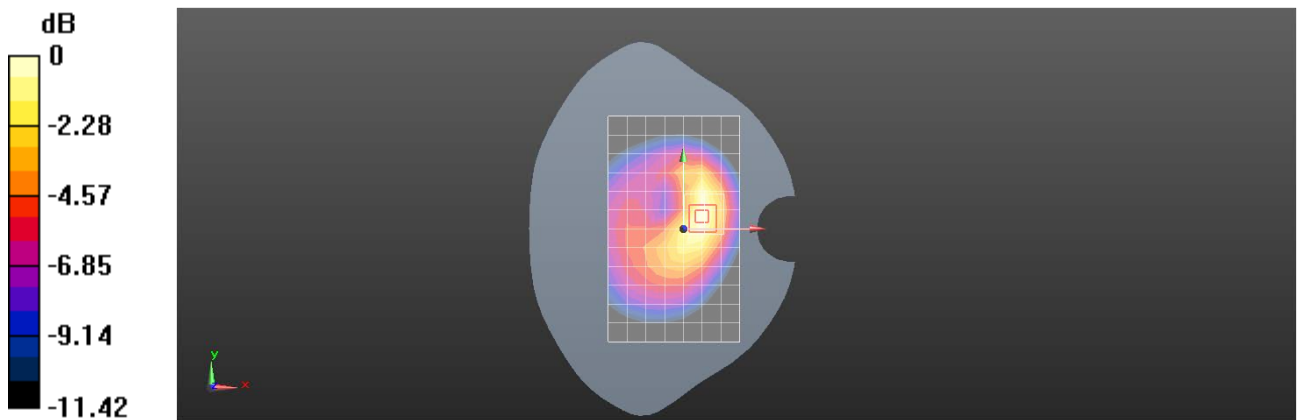

0 dB = 0.335 W/kg = -4.75 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 12 10M QPSK 25RB25 23130CH Left side 10mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.865 \text{ S/m}$; $\epsilon_r = 42.912$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.633 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.20 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.467 W/kg ; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.658 W/kg

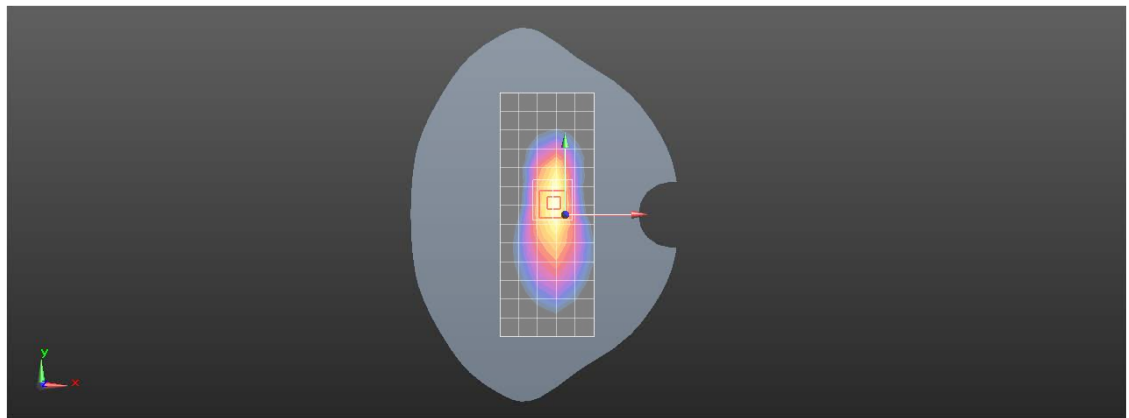

0 dB = 0.658 W/kg = -1.82 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 13 10M QPSK 25RB0 23230CH Left cheek Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 42.598$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.476 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.043 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.970 W/kg

SAR(1 g) = 0.493 W/kg ; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.583 W/kg

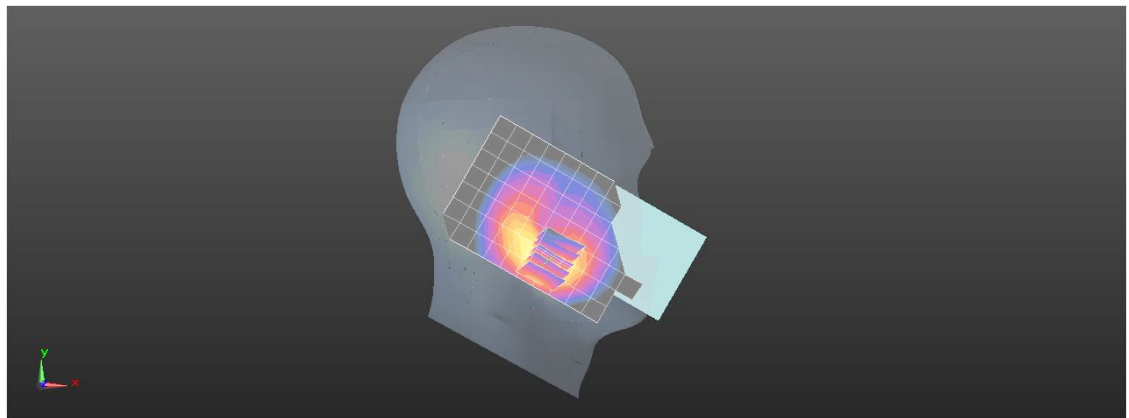

0 dB = 0.583 W/kg = -2.34 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 13 10M QPSK 1RB25 23230CH Back side 15mm Ant1

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 42.598$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.276 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.64 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.236 W/kg ; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.256 W/kg

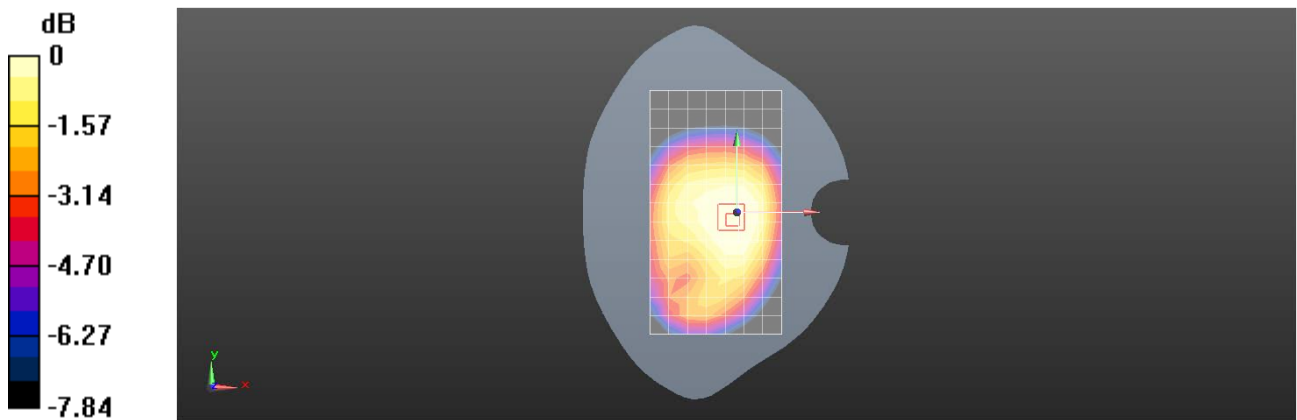

0 dB = 0.256 W/kg = -5.92 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 13 10M QPSK 1RB25 23230CH Left side 10mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 42.598$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.791 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.06 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.943 W/kg

SAR(1 g) = 0.566 W/kg ; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 0.820 W/kg

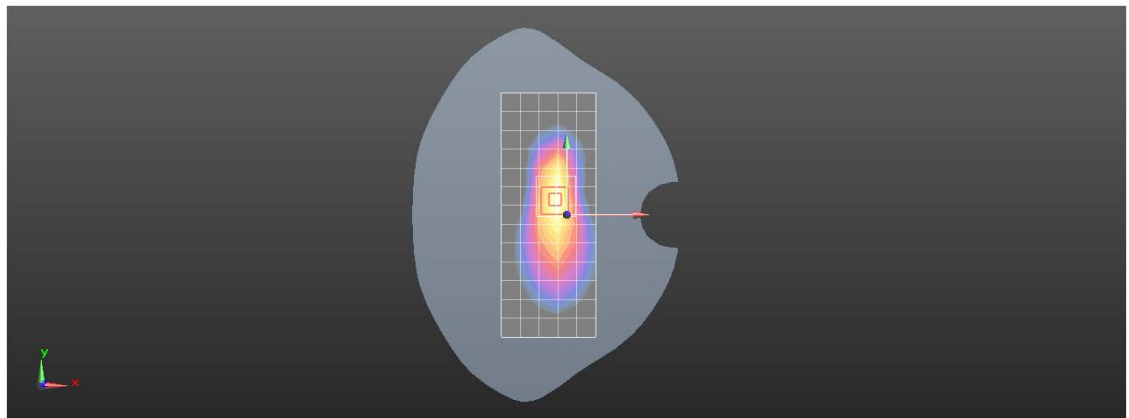

0 dB = 0.820 W/kg = -0.86 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 26 15M QPSK 36RB18 26865CH Left cheek Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.252$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.377 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.906 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.784 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

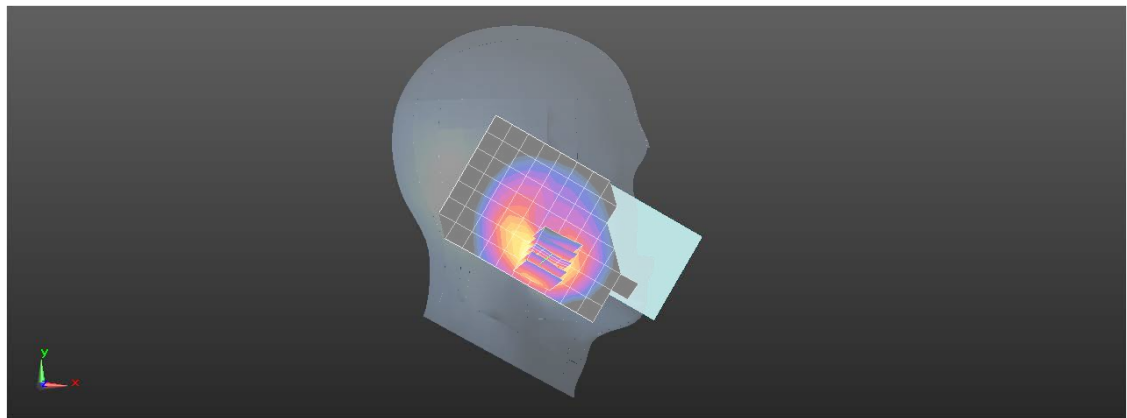

0 dB = 0.492 W/kg = -3.08 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 26 15M QPSK 1RB38 26865CH Back side 15mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.252$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.223 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.722 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

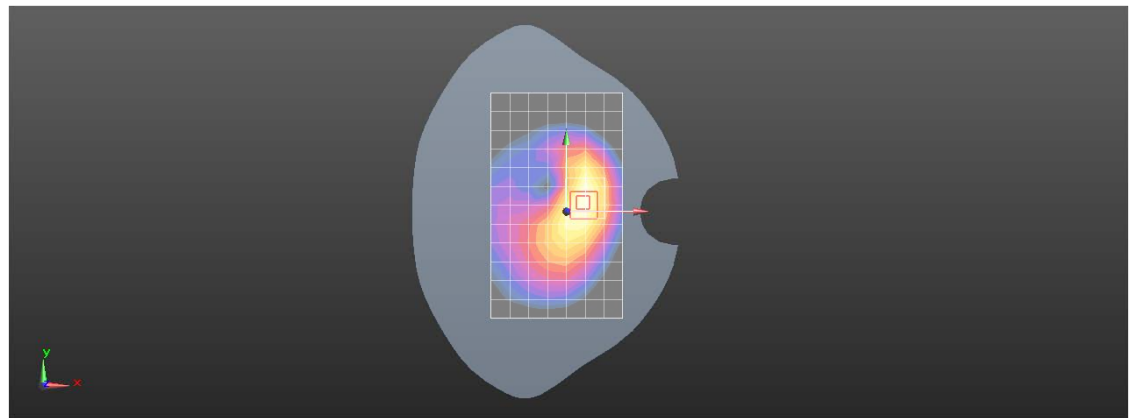

0 dB = 0.224 W/kg = -6.50 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 26 15M QPSK 36RB18 26965CH Left side 10mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 43.192$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.433 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.92 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.463 W/kg

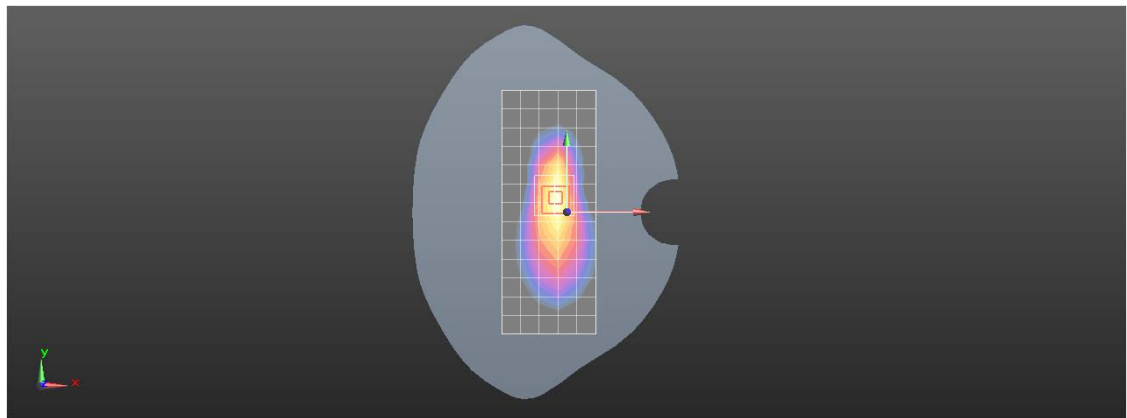

0 dB = 0.463 W/kg = -3.34 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 38 20M QPSK 50RB0 37850CH Right cheek Ant11

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2580 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2580$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 39.982$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.41 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.659 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.874 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 1.74 W/kg

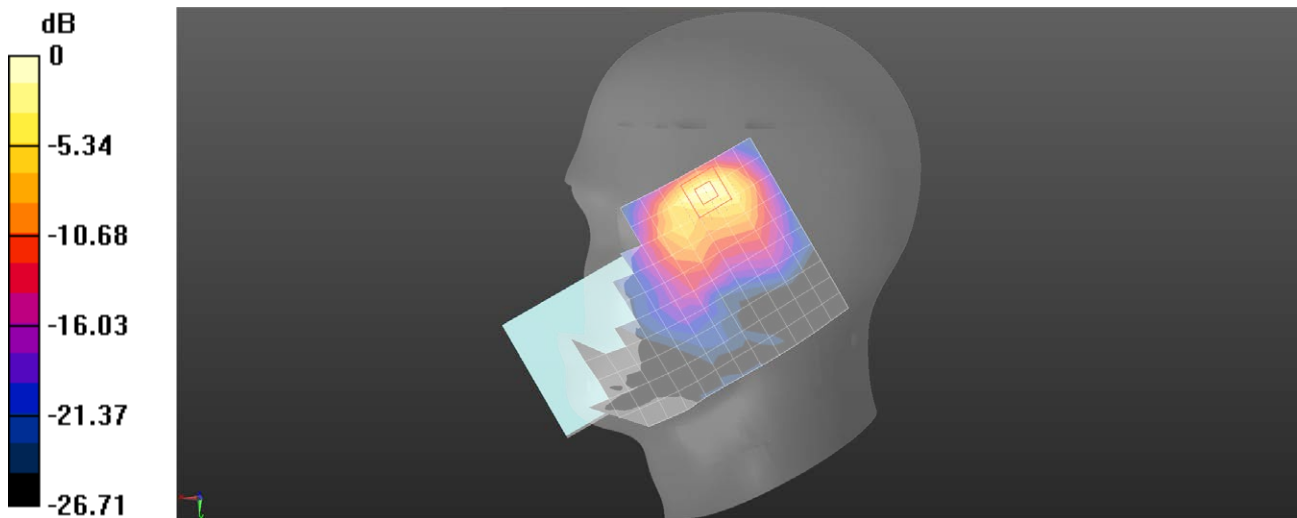

0 dB = 1.74 W/kg = 2.41 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 38 20M QPSK 50RB0 38000CH Back side 15mm Ant11

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016

Medium: HSL2600;Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.959 \text{ S/m}$; $\epsilon_r = 39.934$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.286 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.755 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.1 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

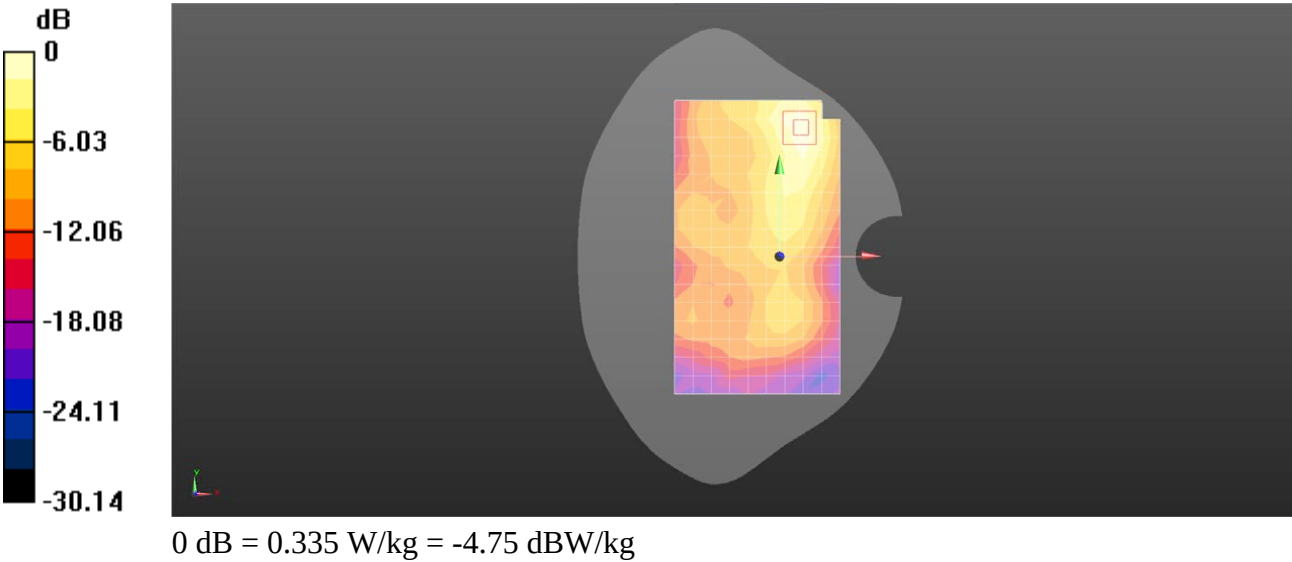

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 38 20M QPSK 50RB0 38000CH Left side 10mm Ant11

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 39.934$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.693 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.596 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.689 W/kg

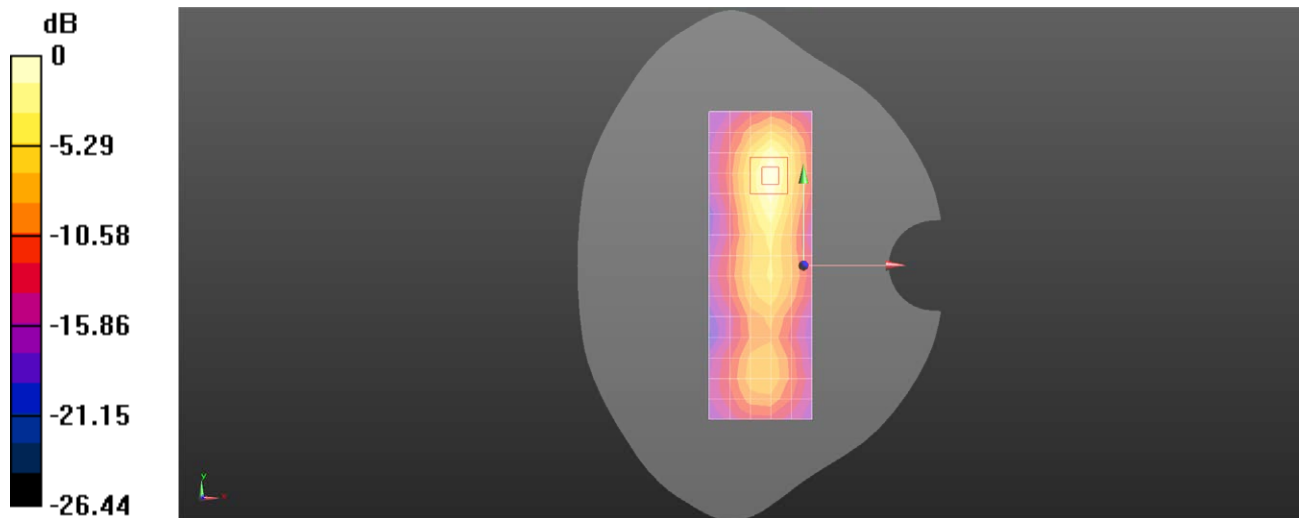

0 dB = 0.689 W/kg = -1.62 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 41 20M QPSK 1RB50 39750CH Right cheek Ant11

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.242$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.76, 6.76, 6.76); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.895 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.435 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.968 W/kg

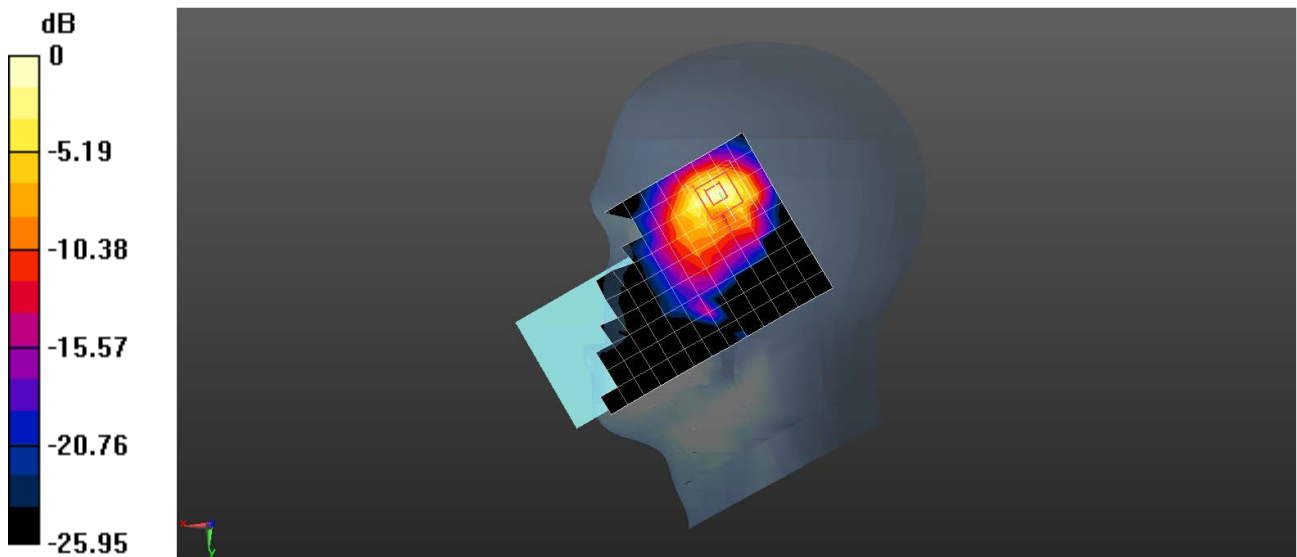

0 dB = 0.968 W/kg = -0.14 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 41 20M QPSK 50RB25 39750CH Back side 15mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.242$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.76, 6.76, 6.76); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.238 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.446 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

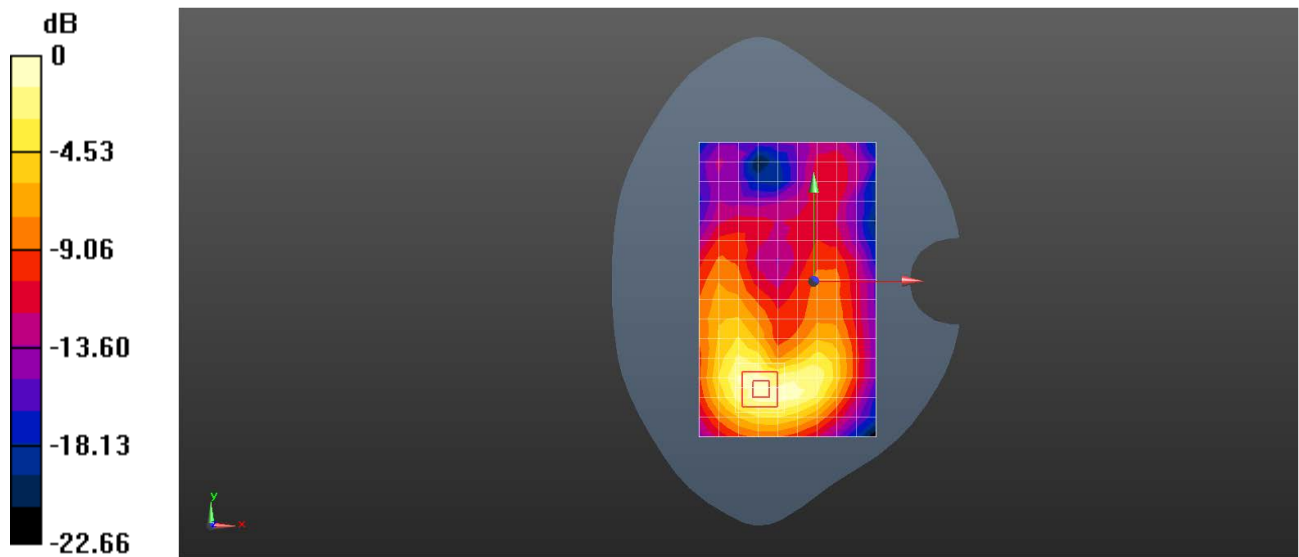

0 dB = 0.273 W/kg = -5.64 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 41 20M QPSK 50RB25 39750CH Top side 10mm Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.242$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.76, 6.76, 6.76); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.607 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.26 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.681 W/kg

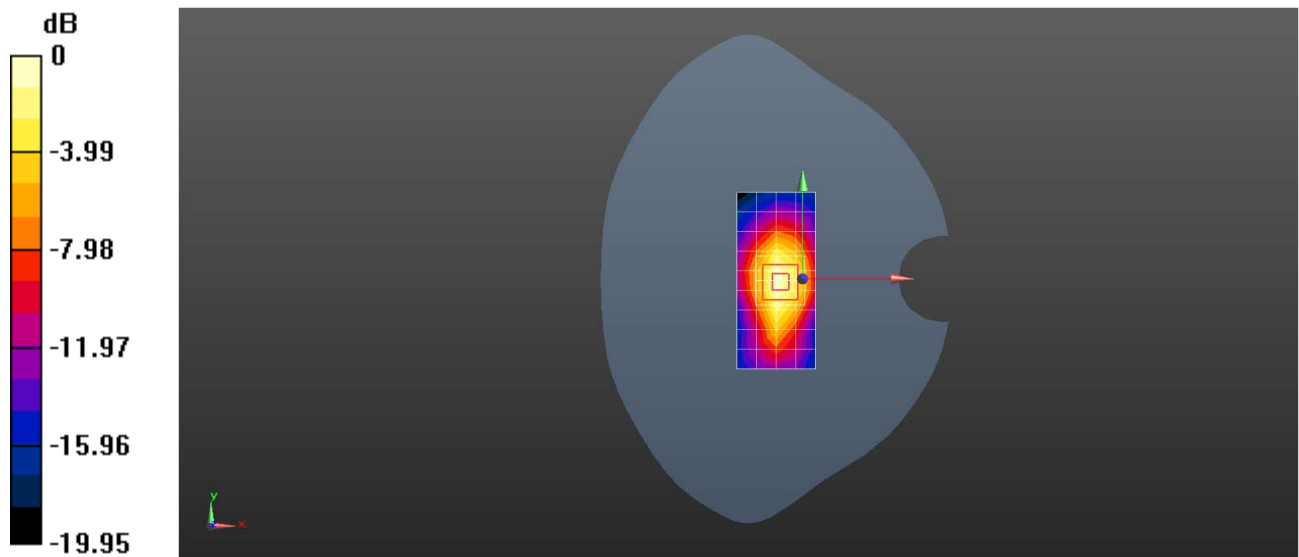

0 dB = 0.681 W/kg = -1.67 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 66 20M QPSK 50RB0 132572CH Right tilted Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1770$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 40.618$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.64 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.26 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

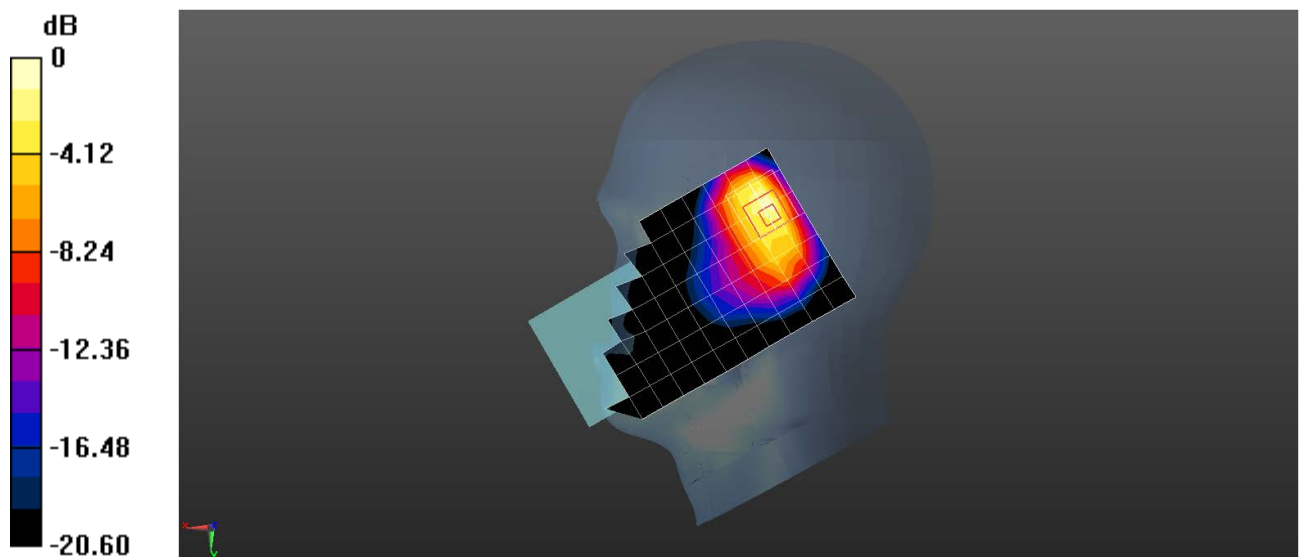

0 dB = 1.77 W/kg = 2.48 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 66 20M QPSK 50RB0 132322CH Back side 15mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.333$ S/m; $\epsilon_r = 40.631$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.203 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.678 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.232 W/kg

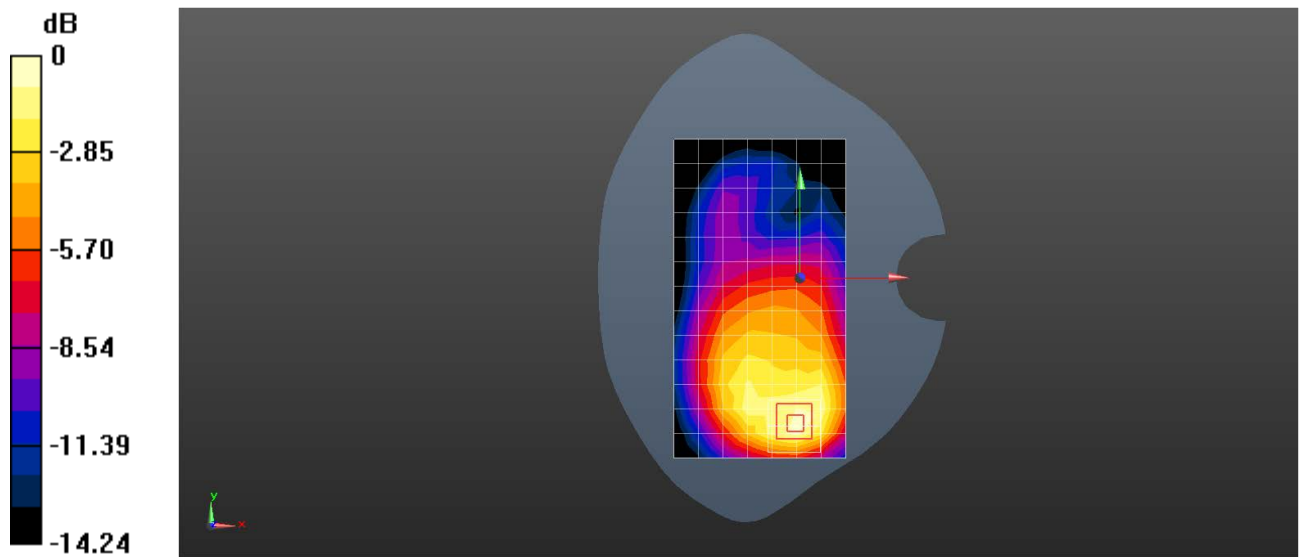

0 dB = 0.232 W/kg = -6.35 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 LTE Band 66 20M QPSK 50RB0 132322CH Bottom side 10mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.333$ S/m; $\epsilon_r = 40.631$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.393 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.53 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.457 W/kg

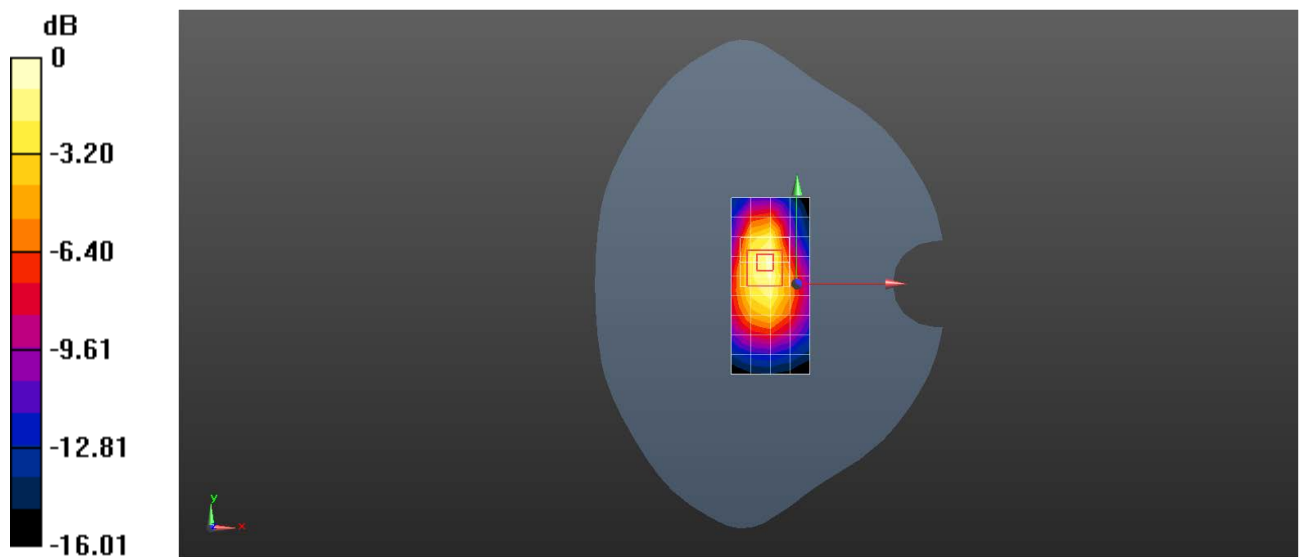

0 dB = 0.457 W/kg = -3.40 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N2 20M QPSK 1RB104 380000CH Right tilted Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, NR (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.52$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.31 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.74 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.466 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

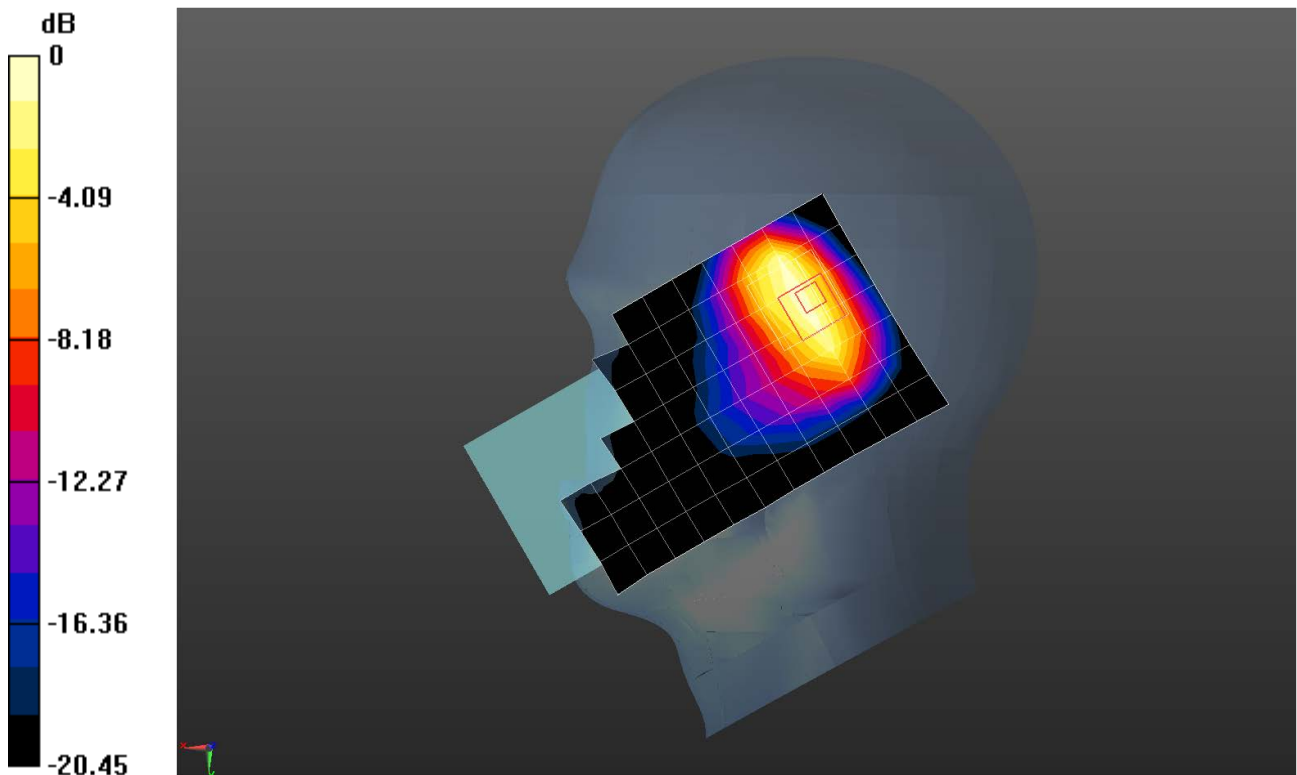

$$0 \text{ dB} = 1.37 \text{ W/kg} = 1.37 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N2 20M QPSK 50RB28 372000CH Back side 15mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, NR (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 40.553$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.290 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.500 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.310 W/kg

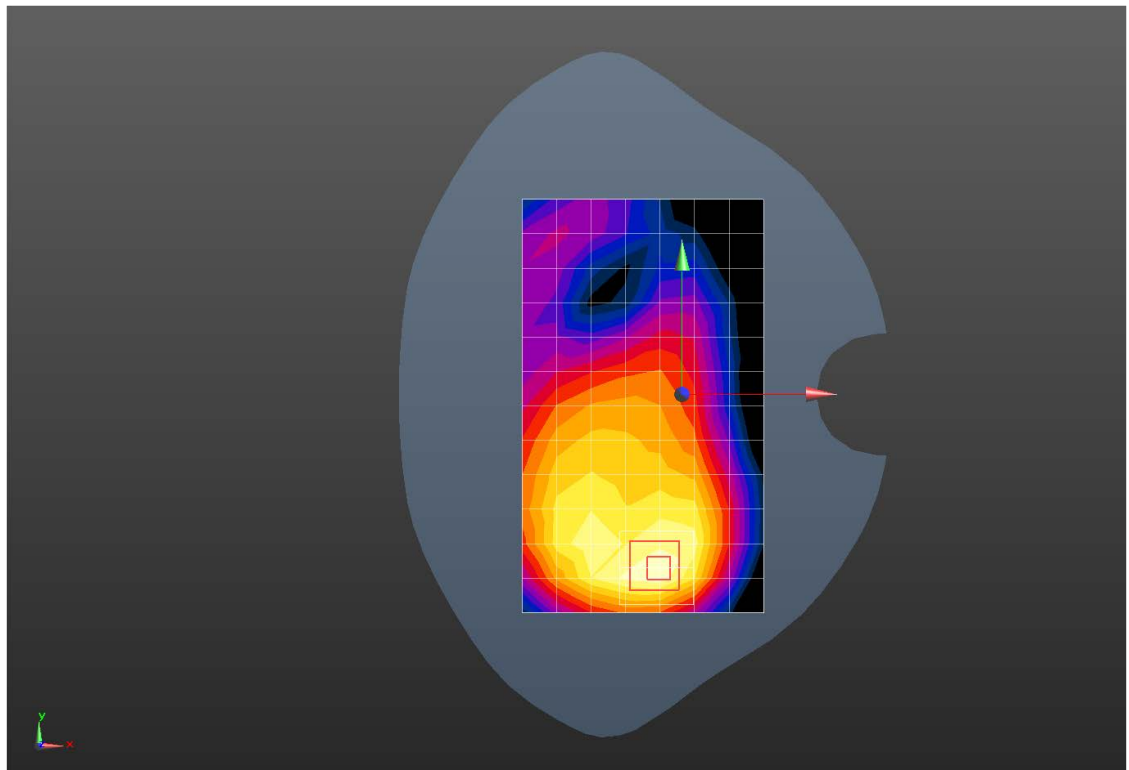

$$0 \text{ dB} = 0.310 \text{ W/kg} = -5.09 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N2 20M QPSK 1RB53 372000CH Bottom side 10mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, NR (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 40.553$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.31, 7.31, 7.31); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.555 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.21 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.646 W/kg

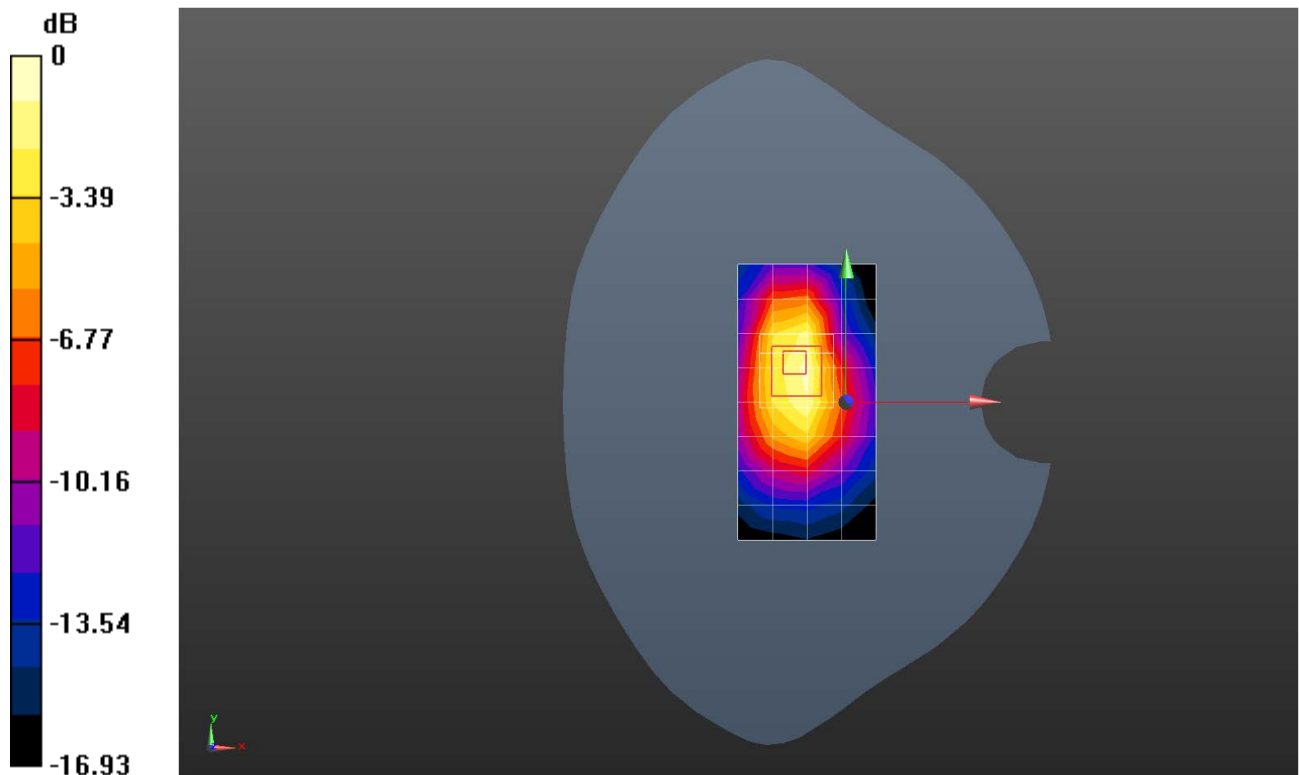

$$0 \text{ dB} = 0.646 \text{ W/kg} = -1.90 \text{ dBW/kg}$$

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N7 40M QPSK 1RB108 509000CH Left cheek Ant7

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 2545 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2545$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.455$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.17 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.247 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

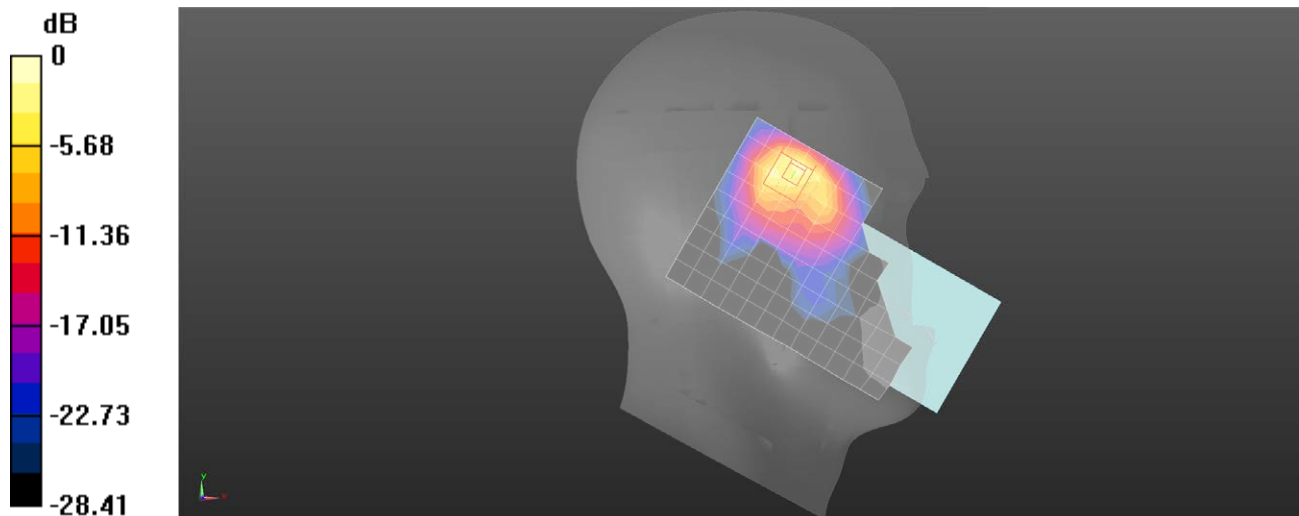

0 dB = 1.86 W/kg = 2.70 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N7 40M QPSK 108RB54 505000CH Back side 15mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 2525 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2525$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.352 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.064 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.399 W/kg

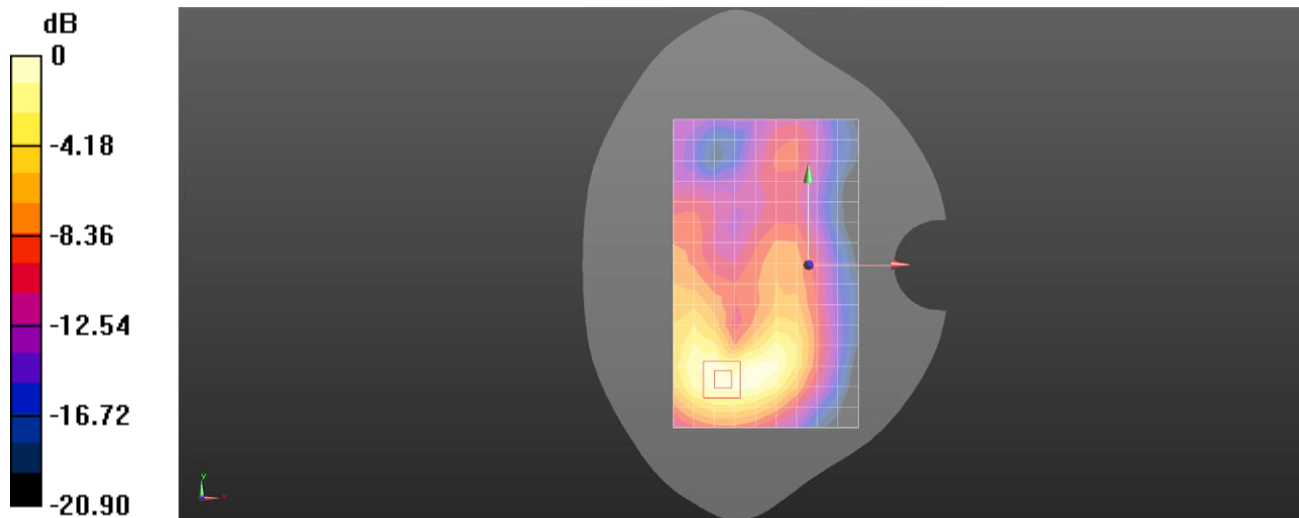

0 dB = 0.399 W/kg = -3.99 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N7 40M QPSK 108RB54 505000CH Bottom side 10mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 2525 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2525$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33); Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.754 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.62 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.973 W/kg

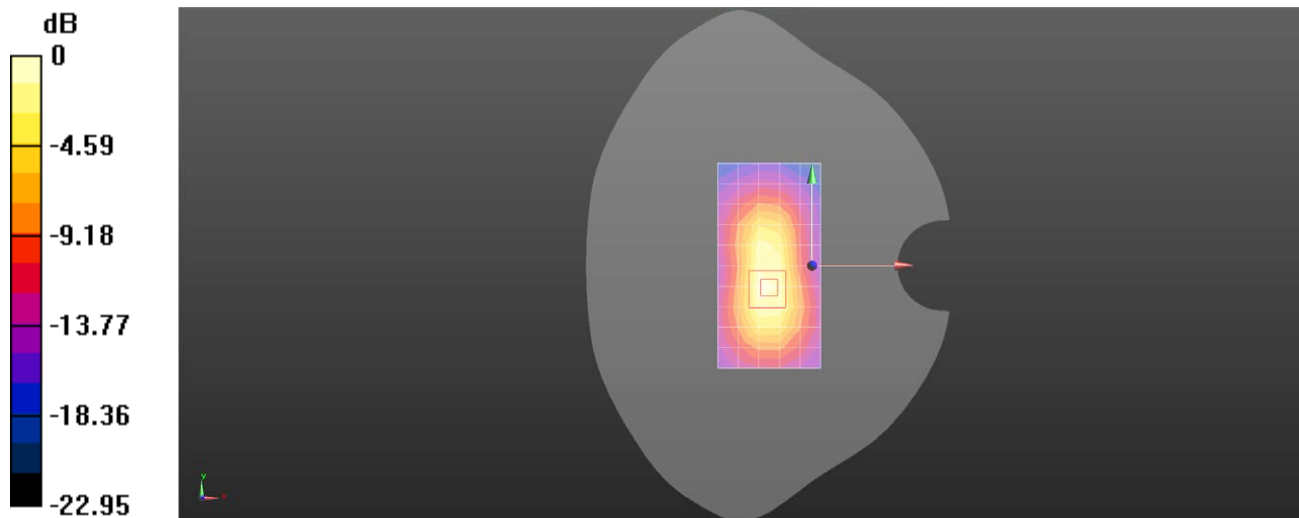

0 dB = 0.973 W/kg = -0.12 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N12 15M QPSK 36RB22 141700CH Left side 0mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 708.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 708.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.903$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.88 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.02 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 2.7 W/kg; SAR(10 g) = 1.05 W/kg

Maximum value of SAR (measured) = 6.74 W/kg

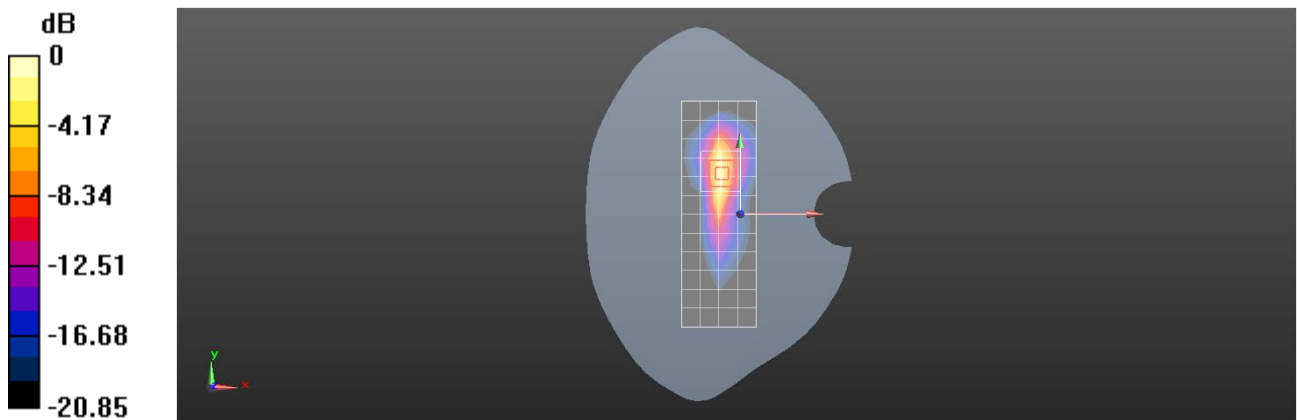

0 dB = 6.74 W/kg = 8.29 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N12 15M QPSK 1RB77 141300CH Back side 15mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 706.5 MHz; Duty Cycle: 1:1

Medium: HSL735; Medium parameters used (interpolated): $f = 706.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.915$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.465 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.63 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.475 W/kg

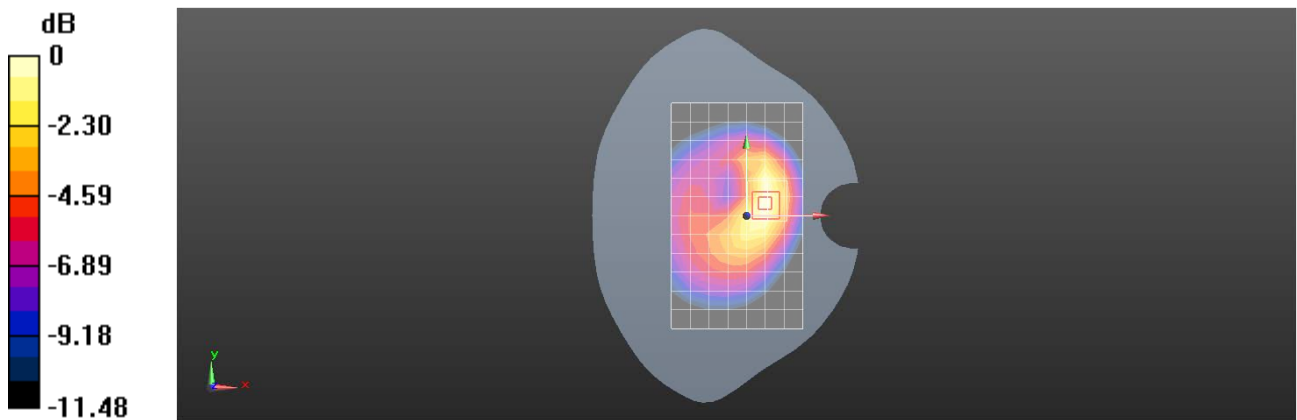

0 dB = 0.475 W/kg = -3.23 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N12 15M QPSK 1RB40 141700CH Left side 10mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 708.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 708.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.903$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.856 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.05 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 0.936 W/kg

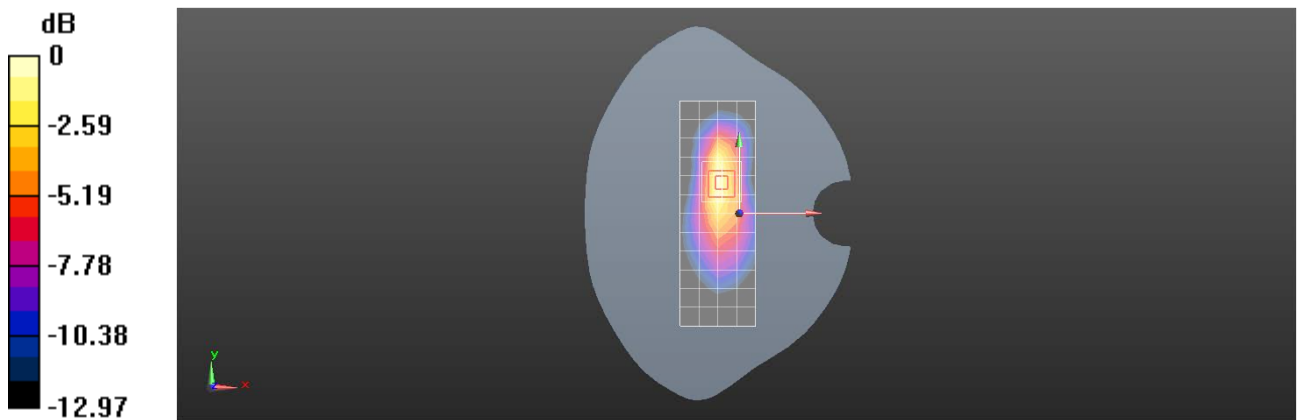

0 dB = 0.936 W/kg = -0.29 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N12 15M QPSK 1RB77 141300CH Left cheek Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027696

Communication System: UID 0, NR (0); Frequency: 706.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 706.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.915$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.1, 10.82, 10.65); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.30 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.632 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

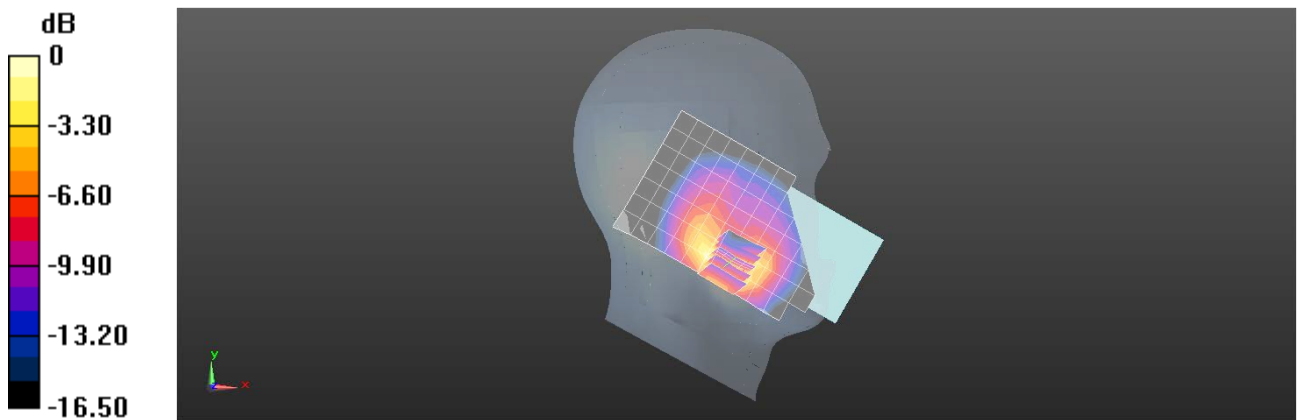

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N26 20M QPSK 50RB28 166300CH Left cheek Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.237$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.350 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.638 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.514 W/kg

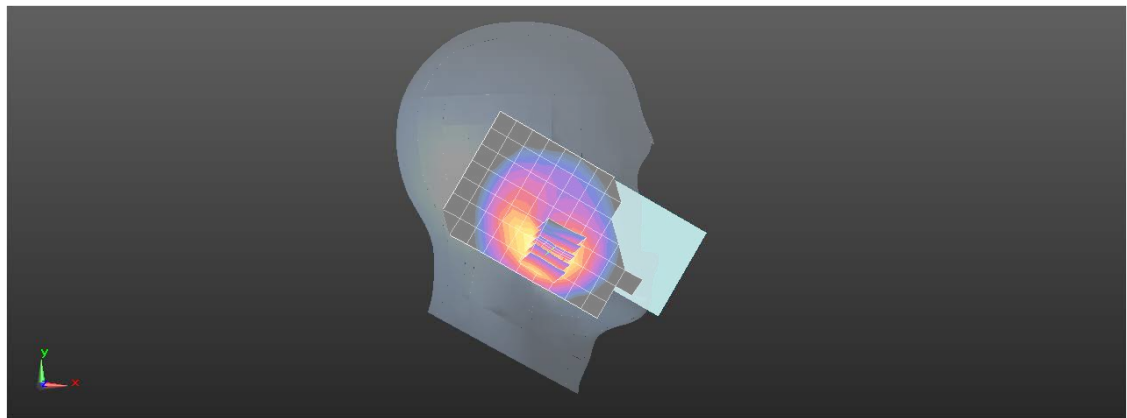

0 dB = 0.514 W/kg = -2.89 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N26 20M QPSK 50RB28 166300CH Back side 15mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, NR (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL850;Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.889 \text{ S/m}$; $\epsilon_r = 43.237$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.383 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.48 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

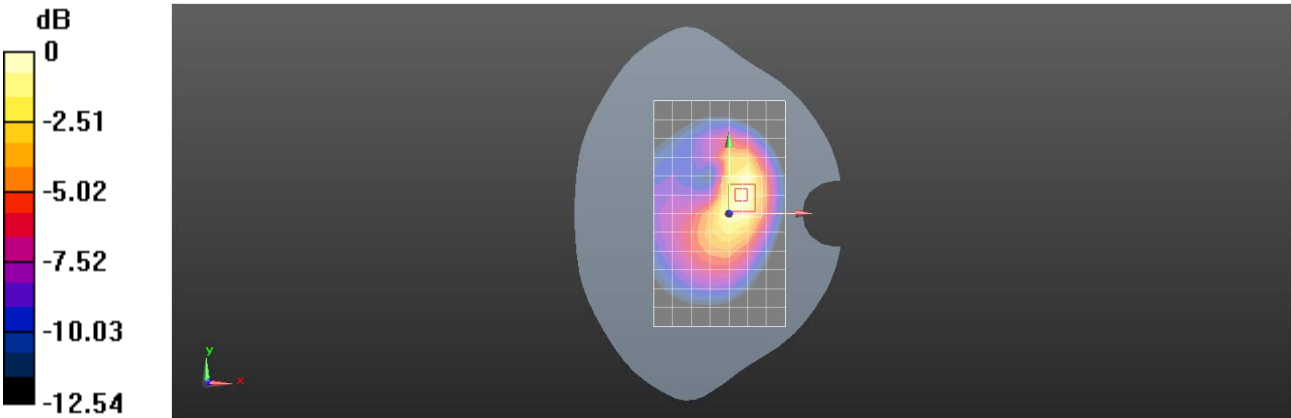

0 dB = 0.411 W/kg = -3.86 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N26 20M QPSK 50RB28 166300CH Left side 10mm Ant0

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027951

Communication System: UID 0, NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.237$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(9.87, 10.58, 10.42) ; Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.678 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.73 V/m; Power Drift = -0.07dB

Peak SAR (extrapolated) = 0.804 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.700 W/kg

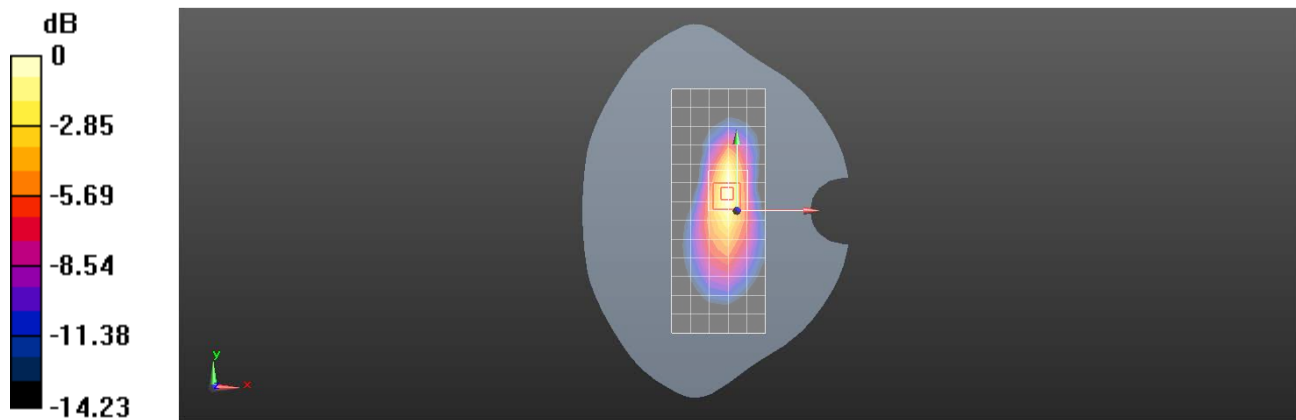

0 dB = 0.700 W/kg = -1.55 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N38 40M QPSK 50RB28 519000CH Left cheek Ant7

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027696

Communication System: UID 0, NR (0); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 38.354$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.60 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.554 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.75 W/kg

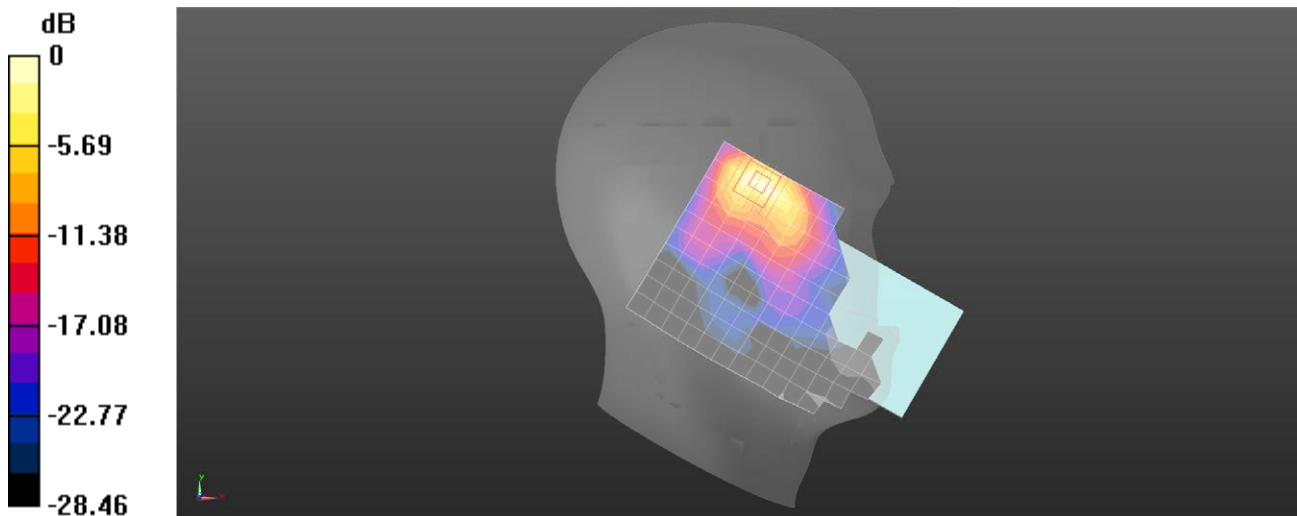

0 dB = 1.75 W/kg = 2.43 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N38 40M QPSK 50RB28 520000CH Back side 15mm Ant7

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027696

Communication System: UID 0, NR (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 38.339$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.347 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.226 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

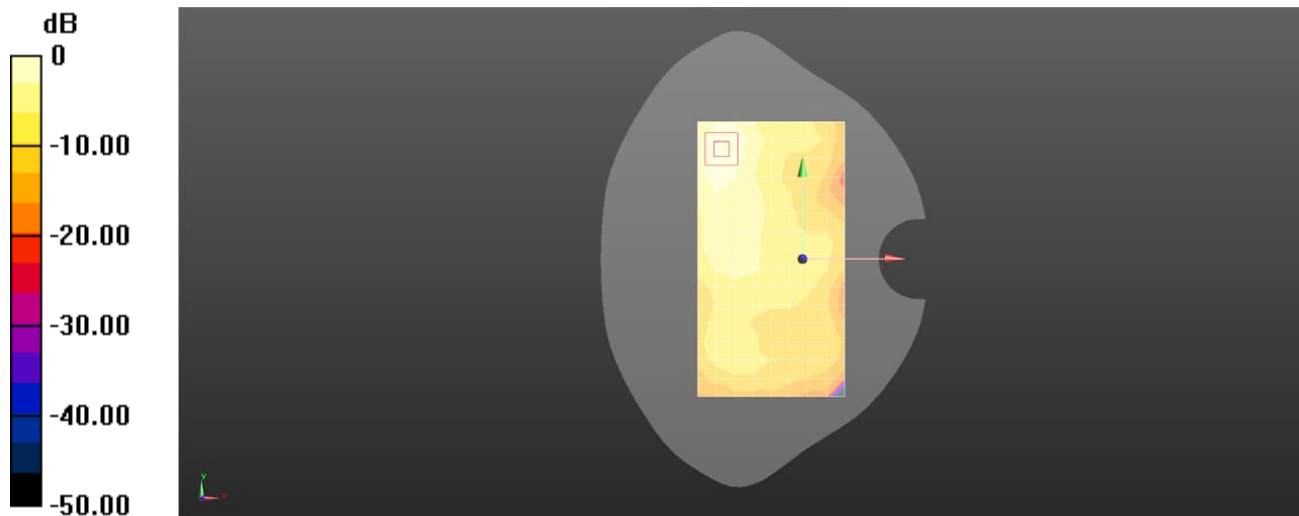

0 dB = 0.357 W/kg = -4.47 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N38 40M QPSK 50RB28 520000CH Right side 10mm Ant7

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028090

Communication System: UID 0, NR (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 38.339$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.832 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.16 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

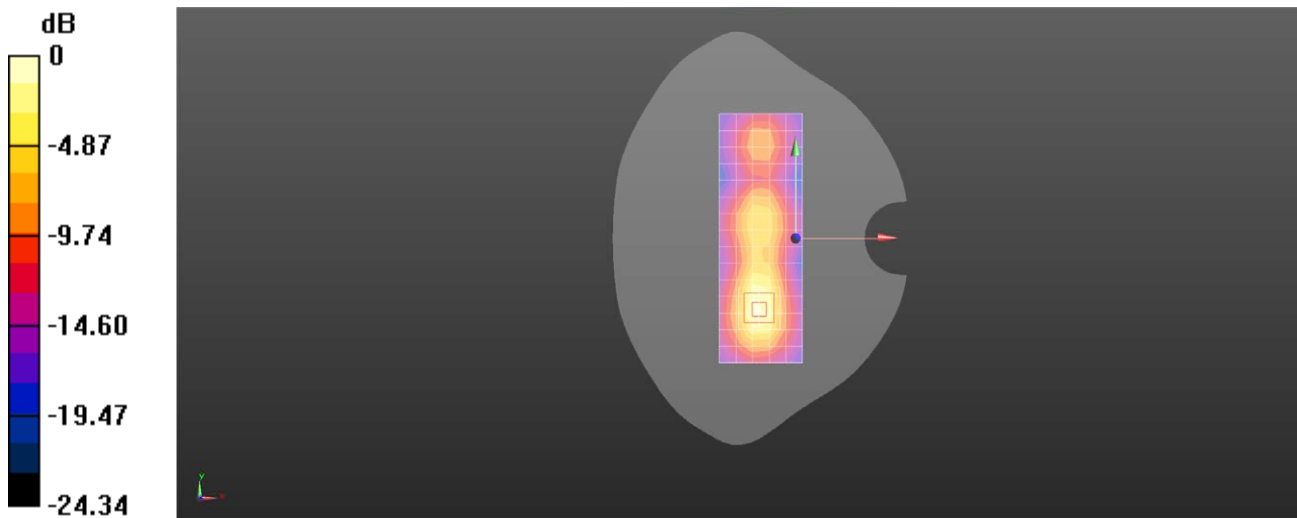

0 dB = 1.04 W/kg = 0.17 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N41 100M QPSK 1RB1 518598CH Right cheek Ant11

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.394$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.60 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.729 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

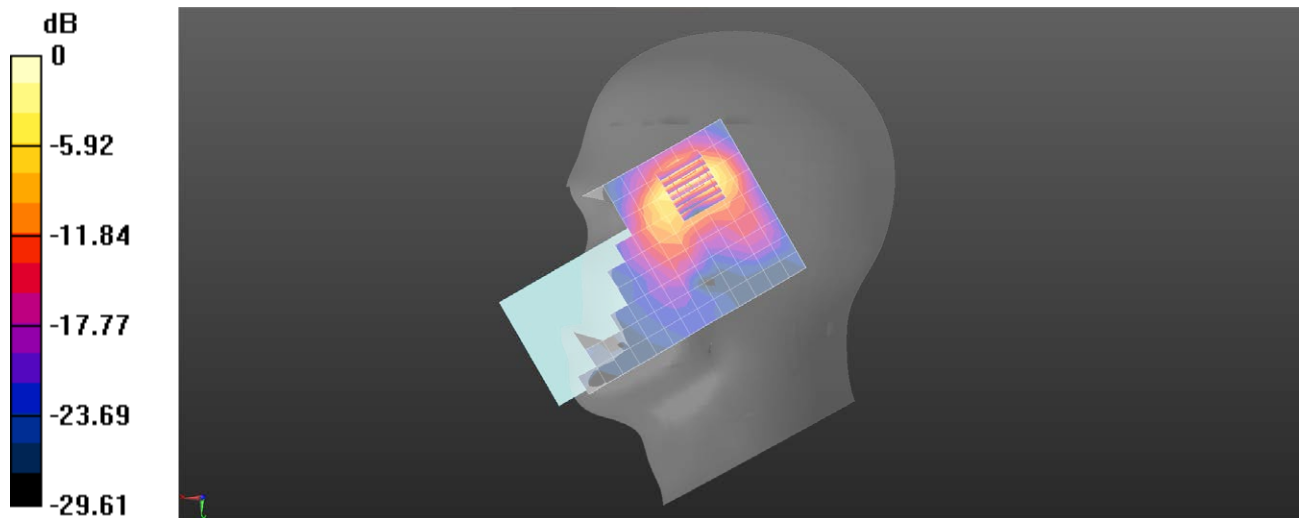

0 dB = 1.60 W/kg = 2.04 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N41 100M QPSK 1RB1 513900CH Back side 15mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 2569.5 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used (interpolated): $f = 2569.5$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 39.693$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.315 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.847 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

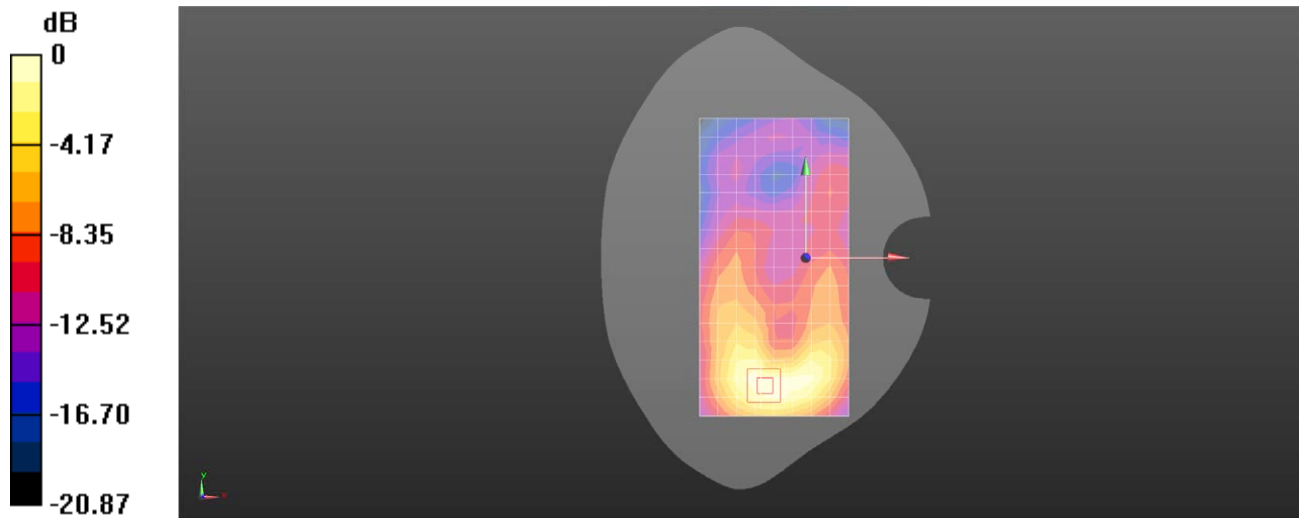

0 dB = 0.333 W/kg = -4.78 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N41 100M QPSK 1RB1 518598CH Top side 10mm Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 39.618$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.33, 7.33, 7.33) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.560 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.67 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

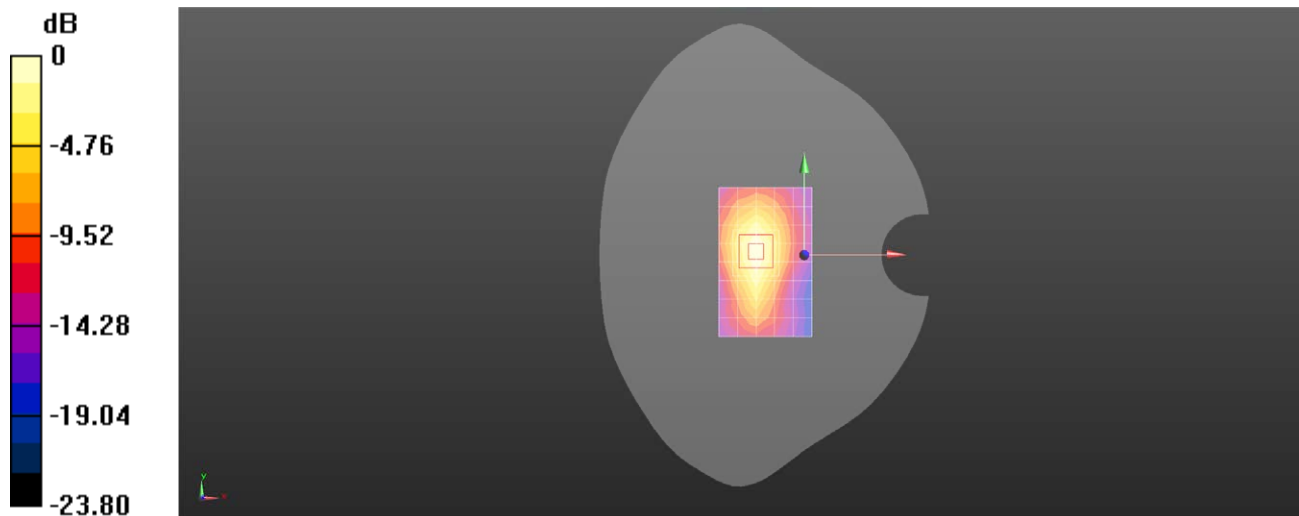

0 dB = 0.573 W/kg = -2.42 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N66 40M QPSK 108RB54 349000CH Right cheek Ant6

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 40.38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.955 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.75 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.366 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

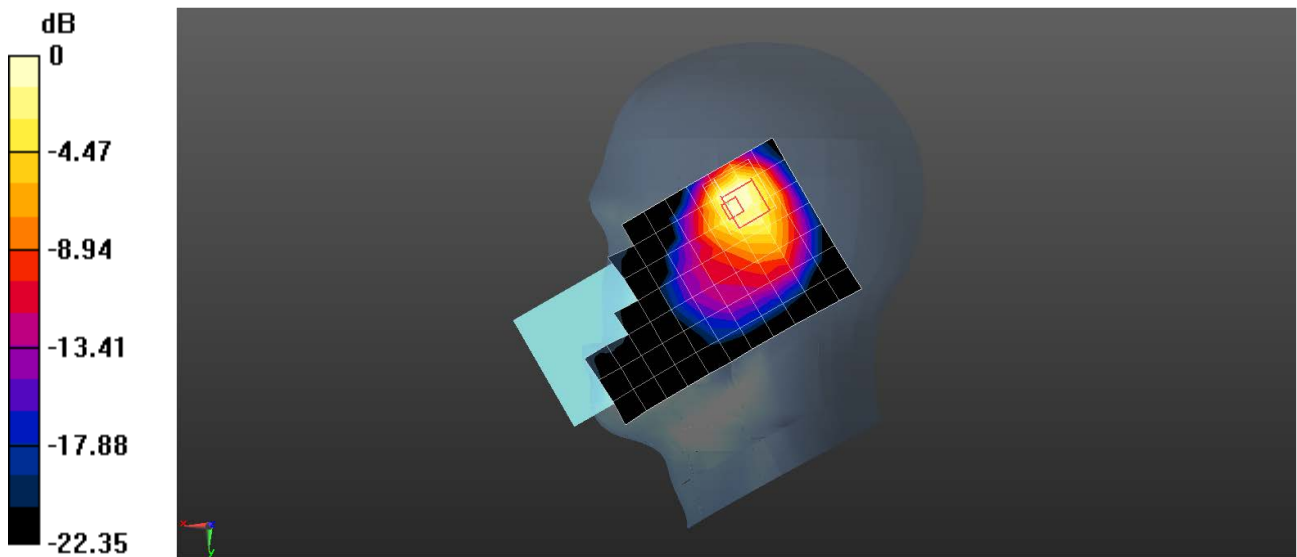

0 dB = 1.08 W/kg = 0.33 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N66 40M QPSK 108RB54 349000CH Back side 15mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 40.38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.277 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.847 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

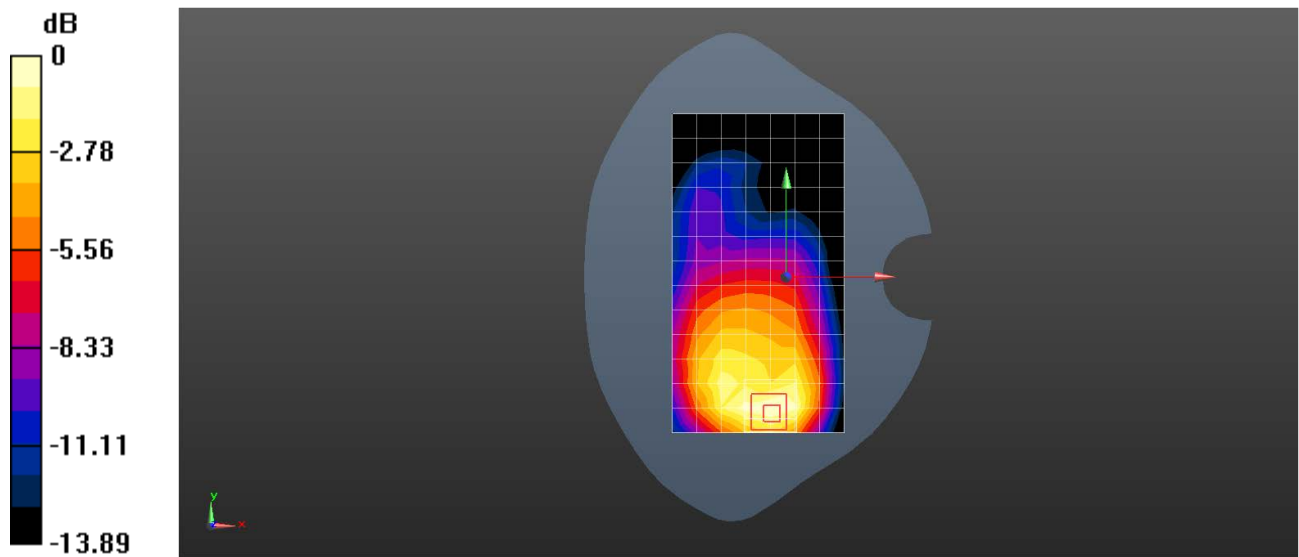

0 dB = 0.268 W/kg = -5.72 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 5G NR N66 40M QPSK 1RB108 349000CH Bottom side 10mm Ant5

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027738

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 40.38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.66, 7.66, 7.66); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.403 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.91 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.423 W/kg

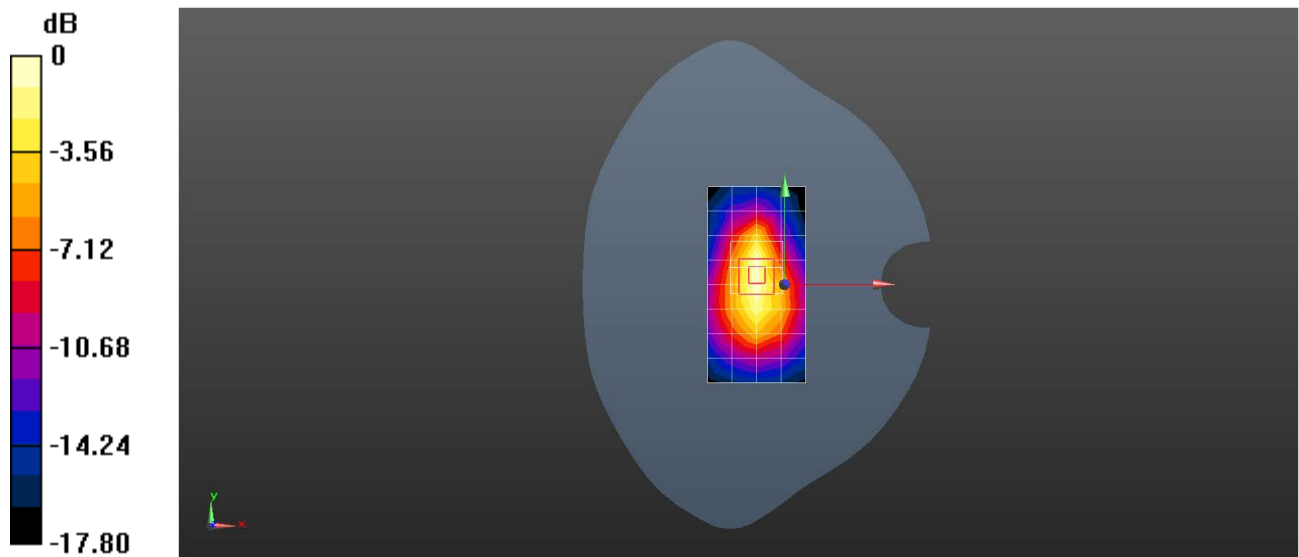

0 dB = 0.423 W/kg = -3.74 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WIFI 2.4G 802.11b 6CH Left cheek MIMO

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 38.465$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.42 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.20 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

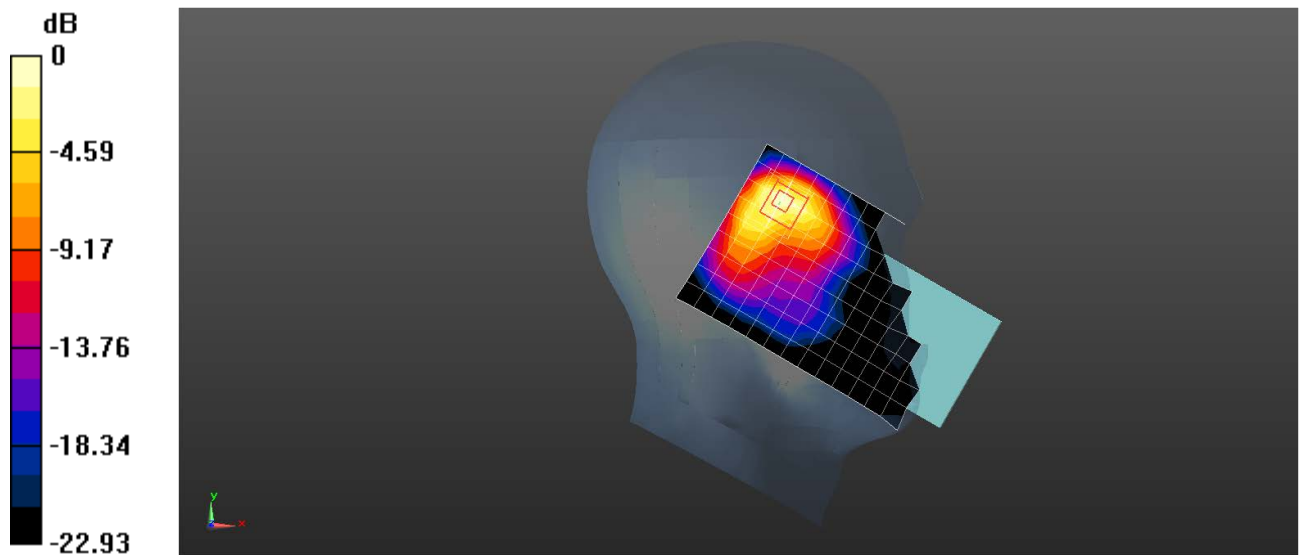

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WIFI 2.4G 802.11b 6CH Back side 15mm MIMO

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 38.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.324 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.936 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.397 W/kg

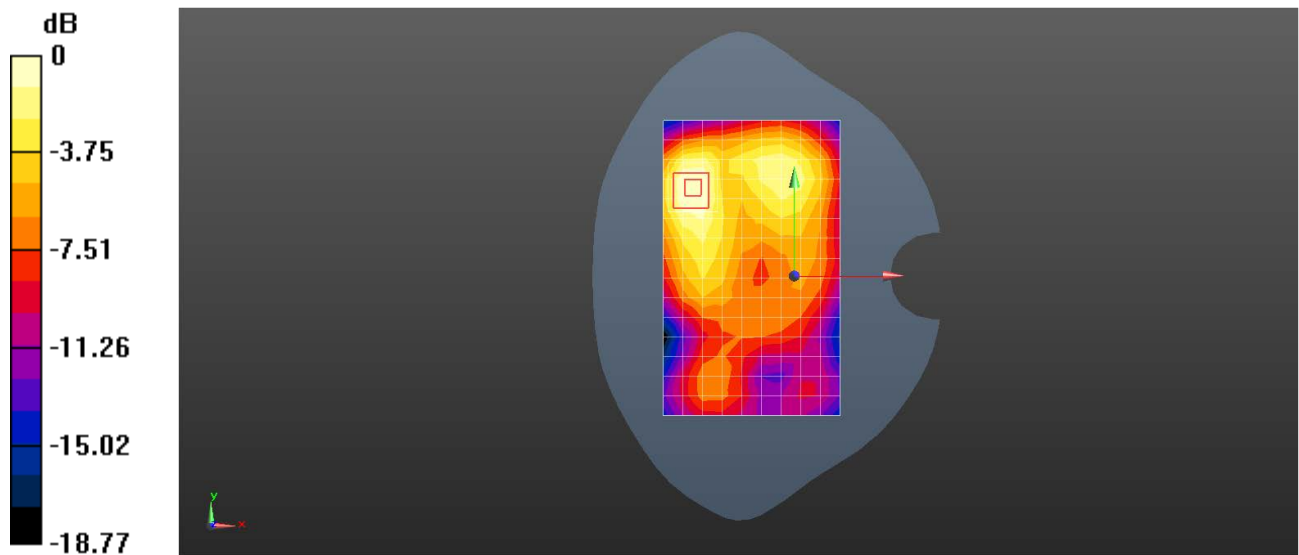

0 dB = 0.324 W/kg = -4.90 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WIFI 2.4G 802.11b 6CH Right side 10mm MIMO

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 38.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.56 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.759 W/kg; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

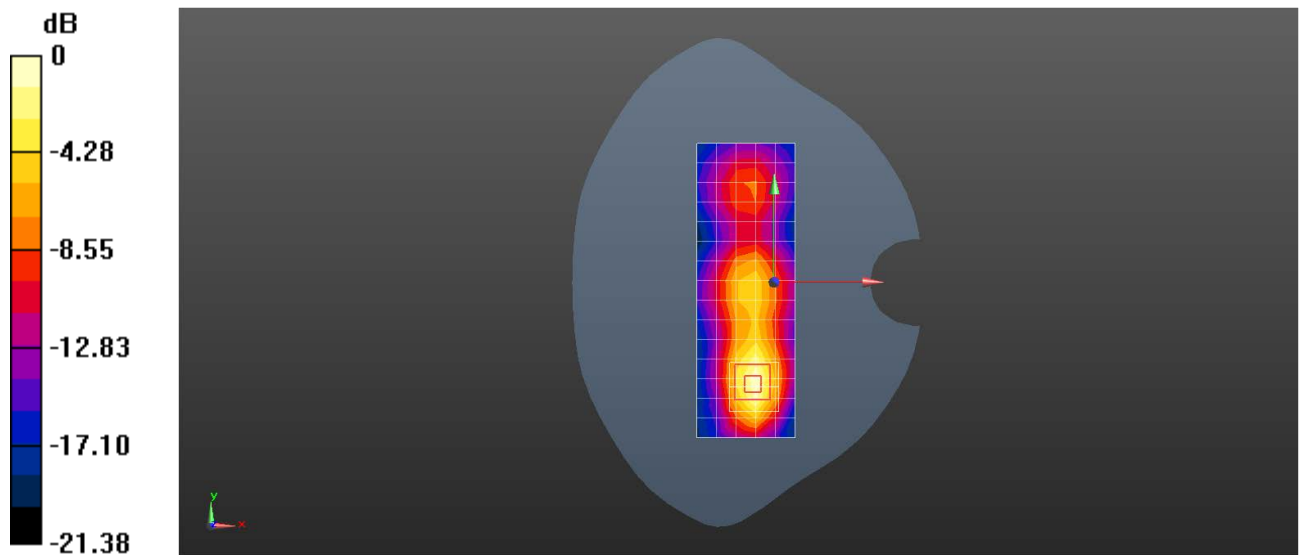

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WIFI 5G 802.11nHT40 134CH Left tilted MIMO

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5670 MHz;Duty Cycle: 1:1.067

Medium: HSL5G;Medium parameters used: $f = 5670$ MHz; $\sigma = 5.226$ S/m; $\epsilon_r = 34.099$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(4.71, 4.71, 4.71) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.95 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.883 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 0.725 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 2.05 W/kg

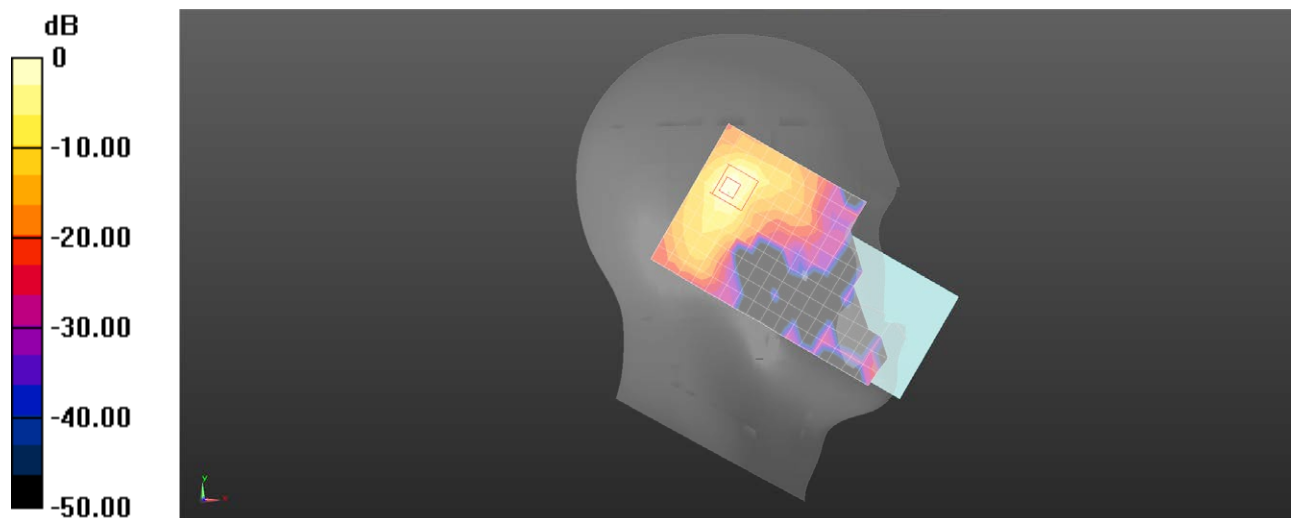

0 dB = 2.05 W/kg = 3.12 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WIFI 5G 802.11acVHT80 155CH Back side 15mm MIMO

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027696

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1.136

Medium: HSL5G;Medium parameters used: $f = 5775$ MHz; $\sigma = 5.356$ S/m; $\epsilon_r = 33.875$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(4.89, 4.89, 4.89) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.363 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.013 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.361 W/kg

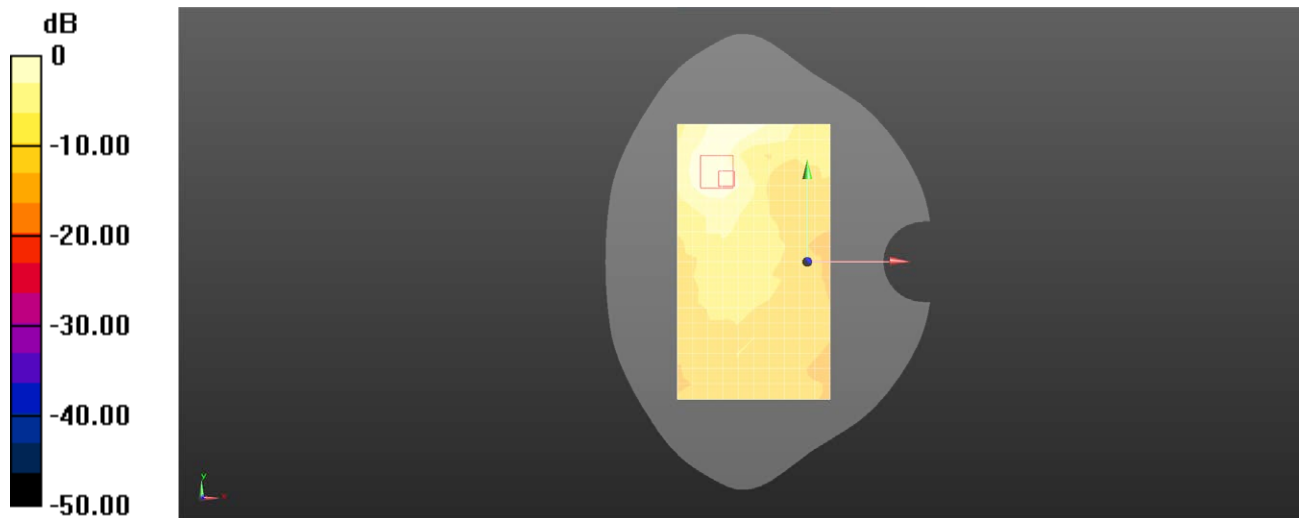

0 dB = 0.361 W/kg = -4.42 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WIFI 5G 802.11a 44CH Right side 10mm MIMO

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027696

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5220 MHz;Duty Cycle: 1:1.03

Medium: HSL5G;Medium parameters used: $f = 5220$ MHz; $\sigma = 4.679$ S/m; $\epsilon_r = 35.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(5.46, 5.46, 5.46) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.18 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.849 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

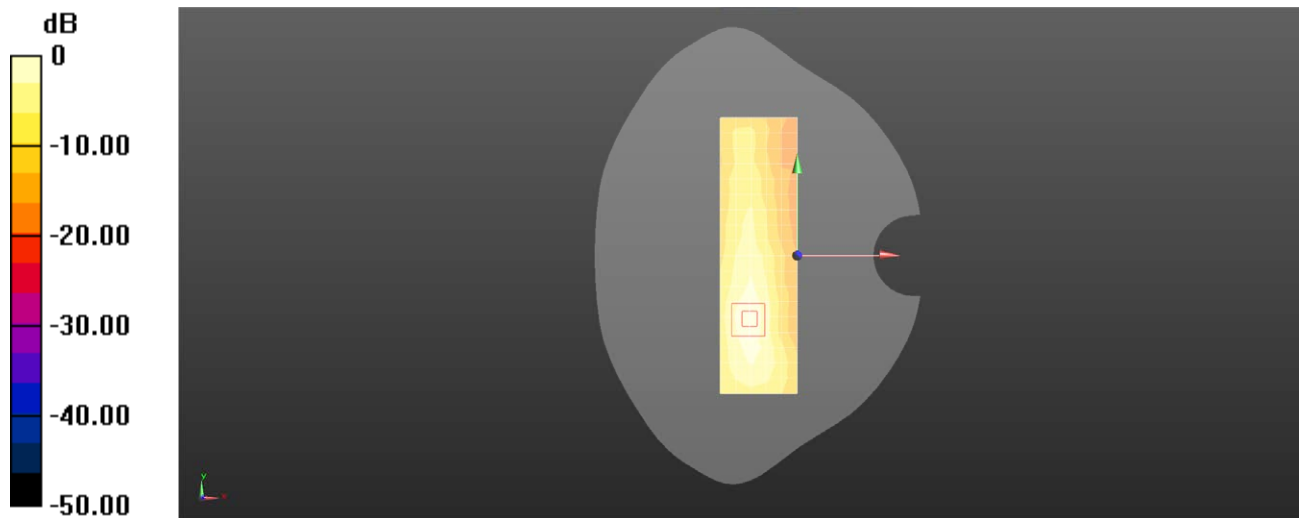

0 dB = 1.20 W/kg = 0.79 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 WIFI 5G 802.11nHT40 54CH Right side 0mm MIMO

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070027696

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5270 MHz;Duty Cycle: 1:1.067

Medium: HSL5G;Medium parameters used: $f = 5270$ MHz; $\sigma = 4.741$ S/m; $\epsilon_r = 34.912$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(5.46, 5.46, 5.46) ; Calibrated: 2023/12/14
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024/3/18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 15.2 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.516 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 39.2 W/kg

SAR(1 g) = 5.94 W/kg; SAR(10 g) = 1.3 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

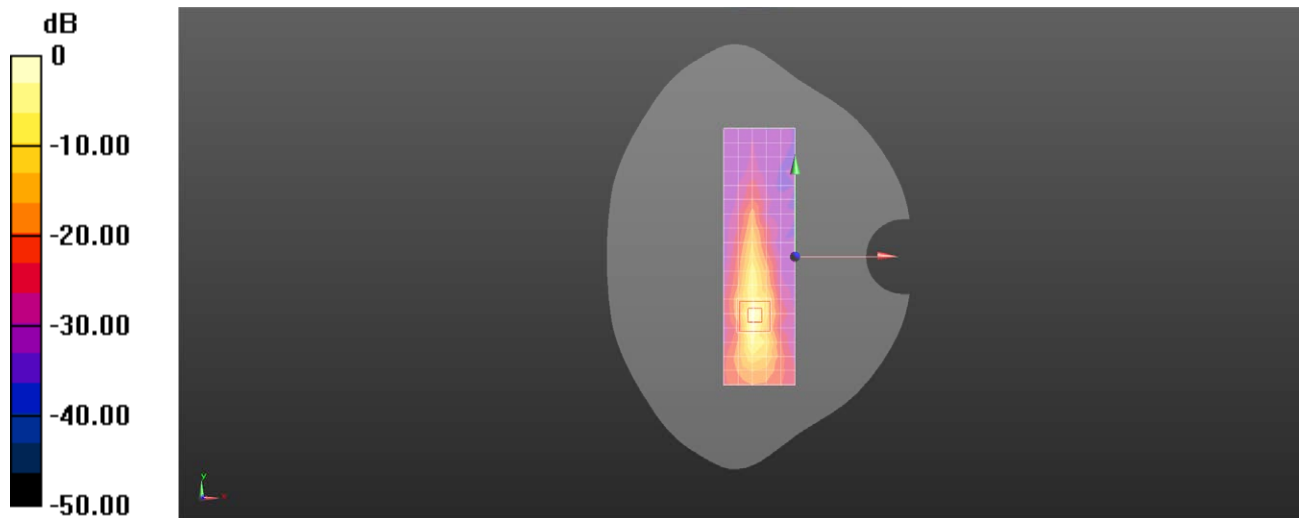

0 dB = 19.3 W/kg = 12.86 dBW/kg

CPH2697 WIFI 6E 802.11axHEW80 87CH Left tilted Ant9**DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058**

Communication System: U-NII-5; Frequency: 6385.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 6385.000$ MHz; $\sigma = 6.13$ S/m; $\epsilon_r = 34.4$

DASY6 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(5.5, 5.5, 5.5); Calibrated: 2023-12-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 Module SAR V16.4.0.5005


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.095 W/kg; SAR (10g) = 0.022 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.125 W/kg; SAR (10g) = 0.030 W/kg;

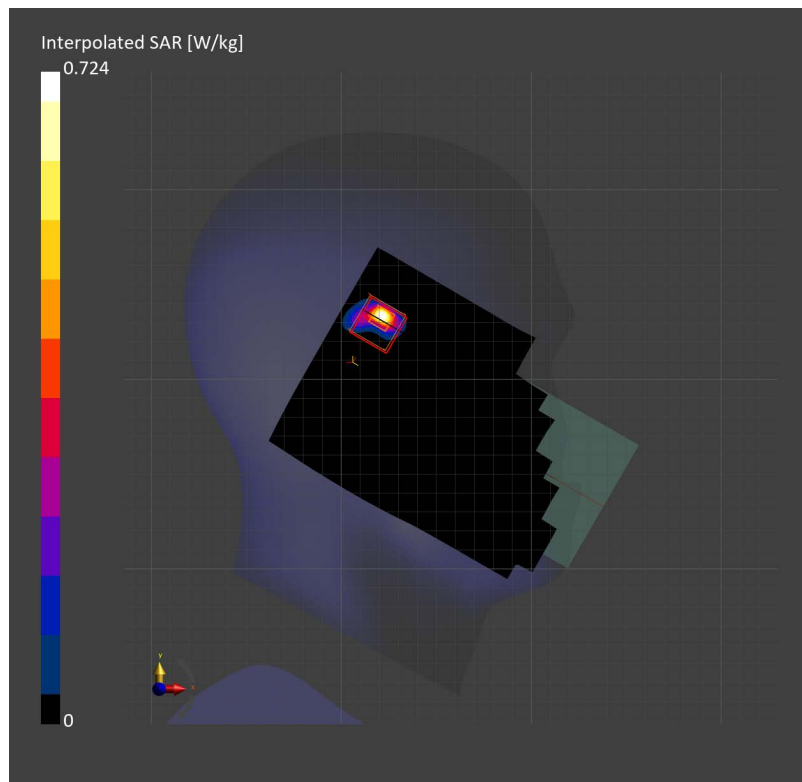

CPH2697 WIFI 6E 802.11axHEW80 87CH Back side 15mm Ant9**DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058**

Communication System: U-NII-5; Frequency: 6385.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 6385.000$ MHz; $\sigma = 6.13$ S/m; $\epsilon_r = 34.4$

DASY6 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(5.5, 5.5, 5.5); Calibrated: 2023-12-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 Module SAR V16.4.0.5005


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.006 W/kg; SAR (10g) = 0 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.012 W/kg; SAR (10g) = 0.004 W/kg;

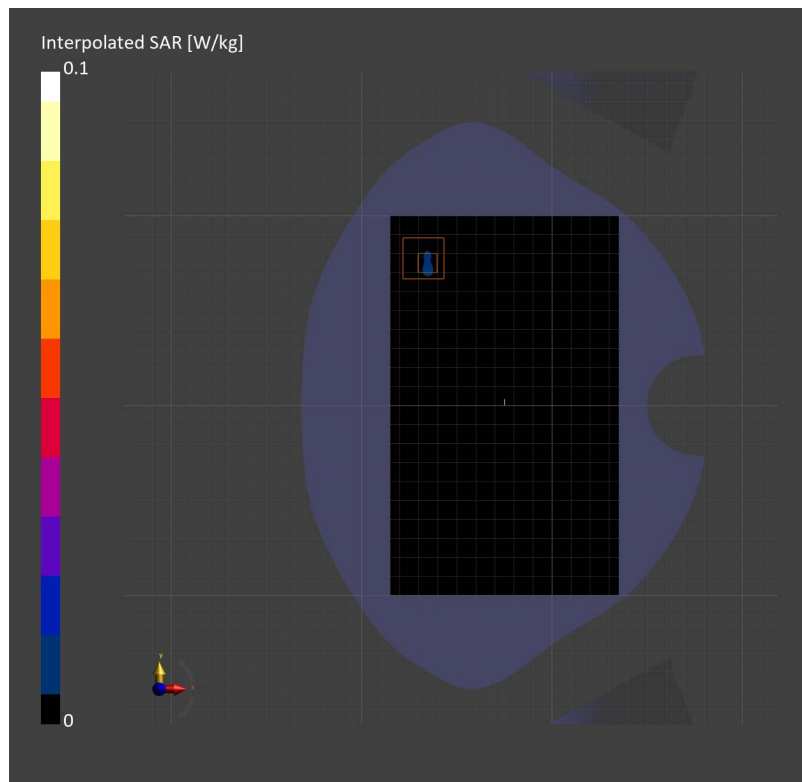

CPH2697 WIFI 6E 802.11axHEW80 7CH Top side 0mm MIMO**DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058**

Communication System: U-NII-5; Frequency: 5985.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 5985.000$ MHz; $\sigma = 5.58$ S/m; $\epsilon_r = 35.7$

DASY6 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(5.5, 5.5, 5.5); Calibrated: 2023-12-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 Module SAR V16.4.0.5005


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.404 W/kg; SAR (10g) = 0.121 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.903 W/kg; SAR (10g) = 0.188 W/kg;

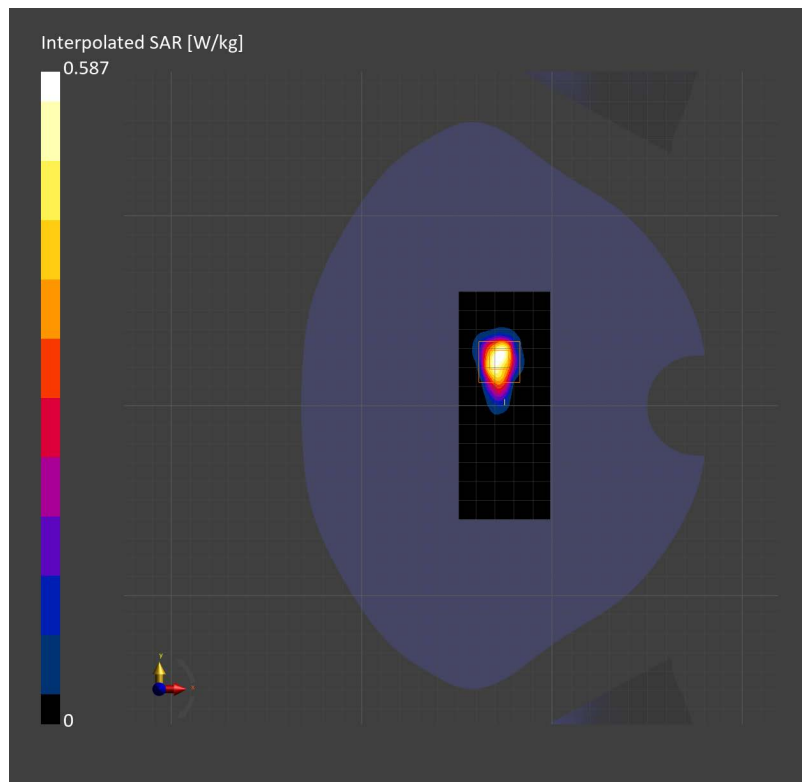

Test Laboratory: SGS-SAR Lab

CPH2697 Bluetooth DH5 78CH Left cheek Ant7

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 38.371$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.852 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.777 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.962 W/kg

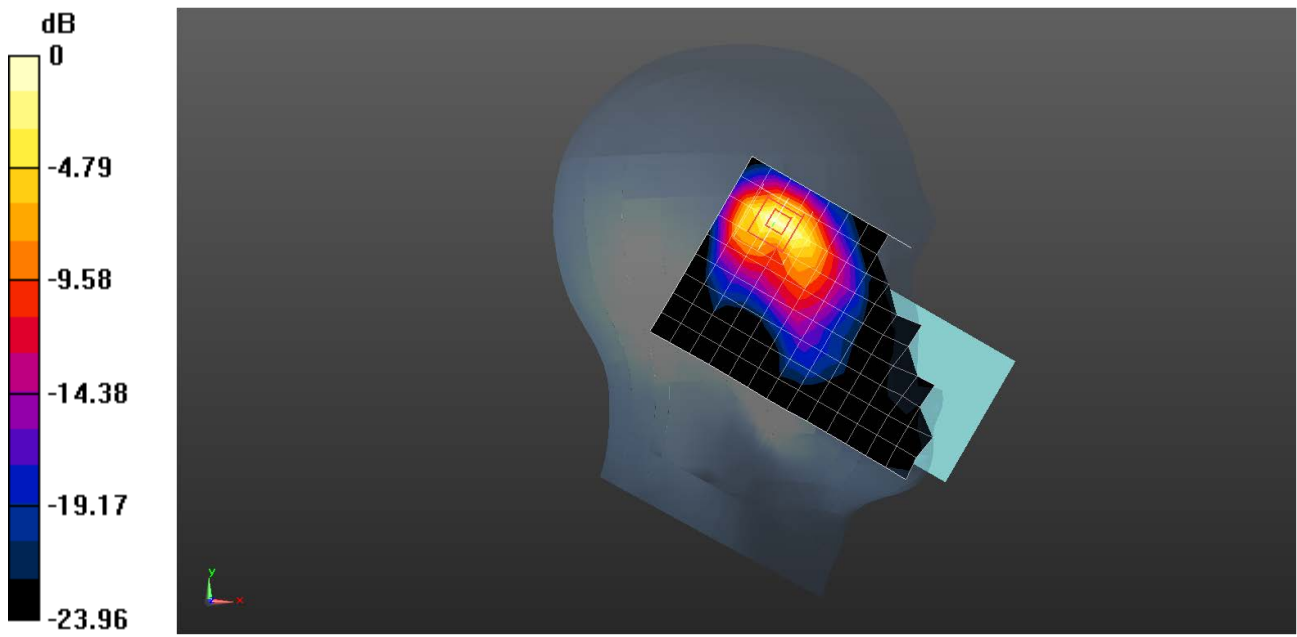

Test Laboratory: SGS-SAR Lab

CPH2697 Bluetooth DH5 39CH Back side 15mm Ant7

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.295

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.455$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.268 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.089 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.291 W/kg

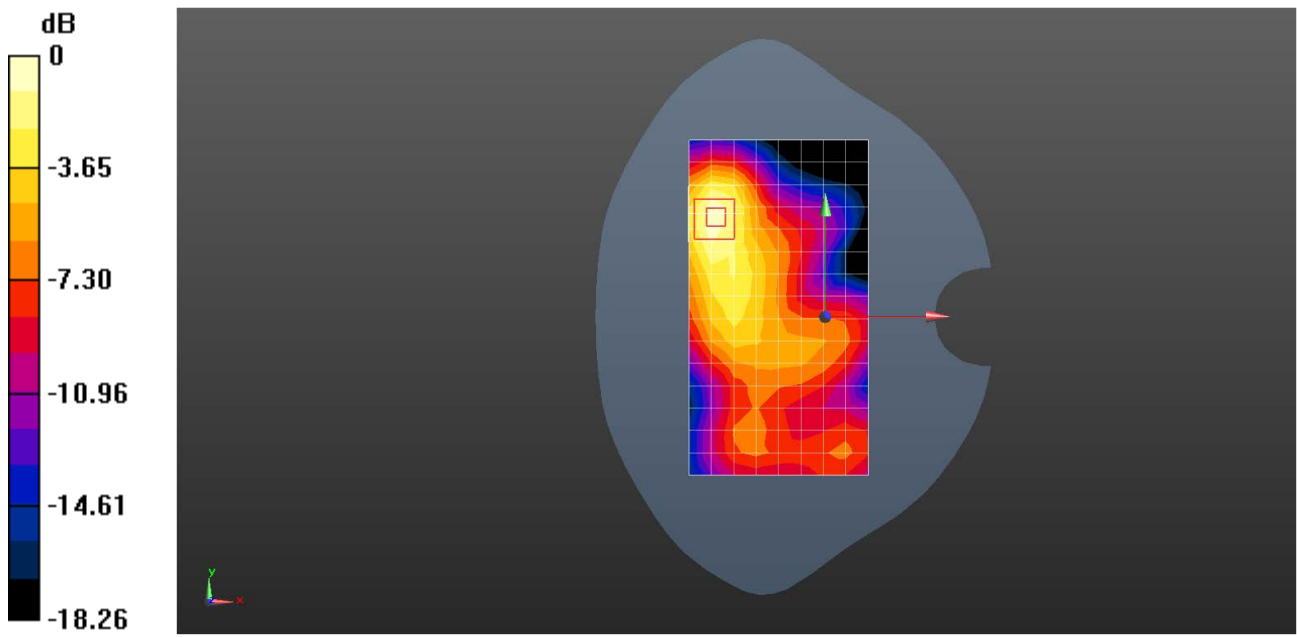

0 dB = 0.291 W/kg = -5.36 dBW/kg

Test Laboratory: SGS-SAR Lab

CPH2697 Bluetooth DH5 39CH Right side 10mm Ant7

DUT: CPH2697; Type: Mobile Phone; Serial: 864138070028058

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.295

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.455$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.95, 6.95, 6.95); Calibrated: 2023/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.372 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.936 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.410 W/kg

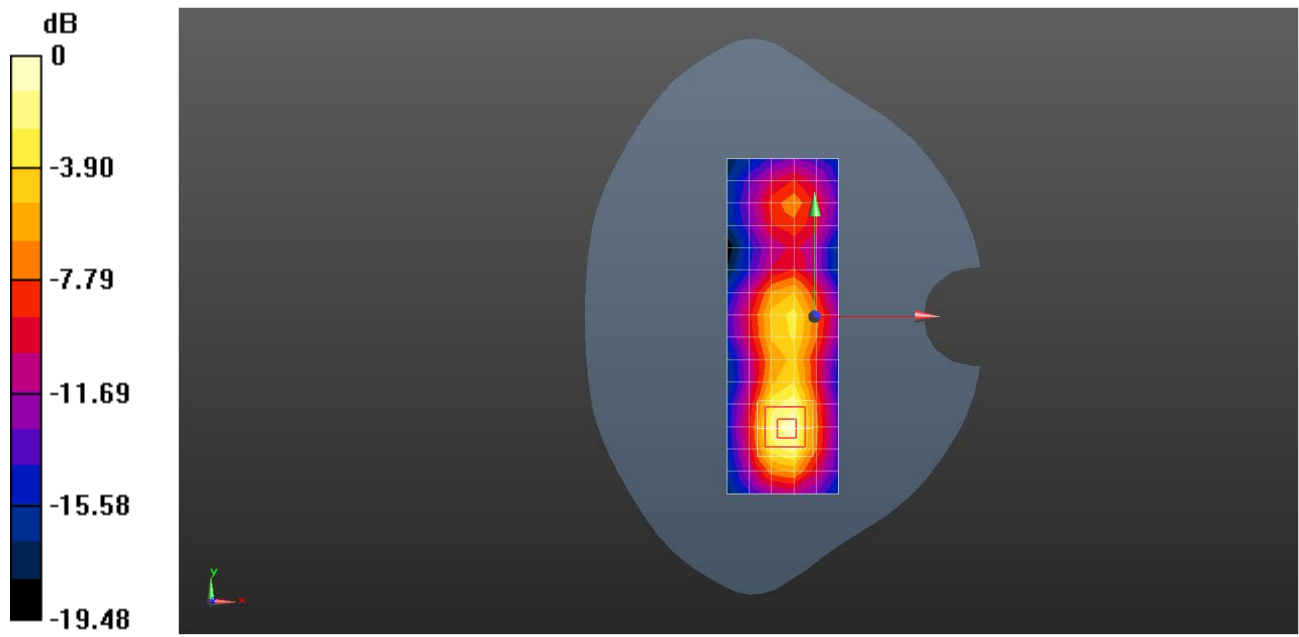

0 dB = 0.410 W/kg = -3.87 dBW/kg

Test Laboratory:SGS-SAR Lab
CPH2697 WIFI 6E 802.11axHEW80 7CH Top side 2mm MIMO

Device Under Test Properties

Model	Dimensions [mm]	IMEI	DUT Type
CPH2697	165.0 x 75.0 x 8.0	869401070019963	Mobile Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE TOP, 2.00	U-NII-5	WLAN, 10719-AAC	5985.0, 7	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1777	Air –	EUmmWV4 – SN9533_F1–55GHz, 2024–08–23	DAE4 Sn896, 2024–03–18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	Y

Measurement Results

Scan Type	5G Scan
Date	2024-11-26
Avg. Area [cm2]	4.00
psPDn+ [W/m2]	2.36
psPDtot+ [W/m2]	4.85
psPDmod+ [W/m2]	10.6
E _{max} [V/m]	113
Power Drift [dB]	-0.02

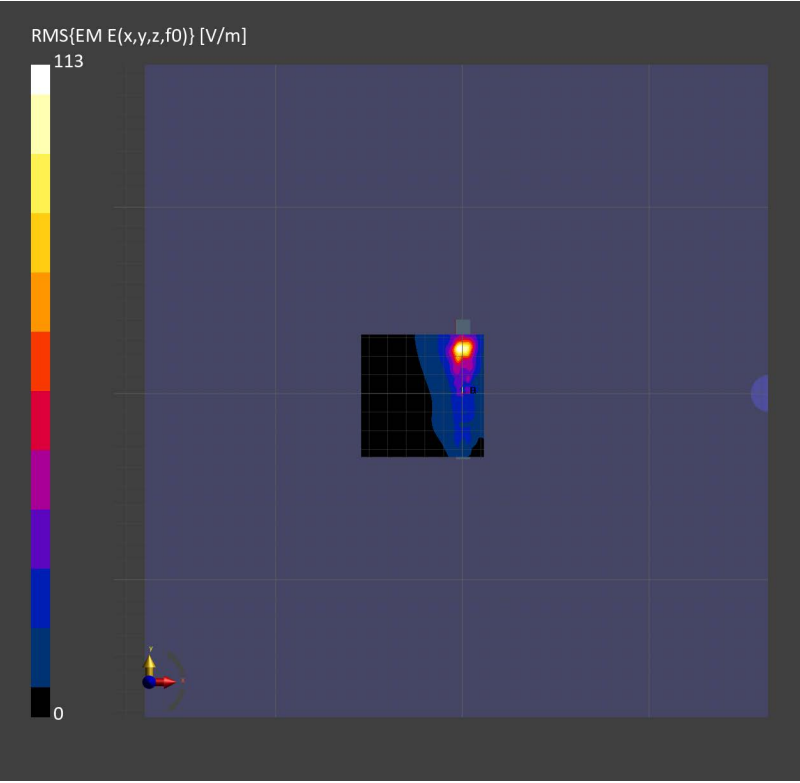

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01-A04 Rev. A/0 Aug 16,2024

Report No.: SZCR240900360410

Page: 90 of 90

- End of the Appendix -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Technical Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com