
Appendix for the Report

Dosimetric Assessment of the Alcatel One Touch 331P (FCC ID: RAD001) According to the FCC Requirements

SAR Distribution Plots

July 08, 2003
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Alcatel Business Systems
32, avenue Kléber
F-92707 Colombes Cedex

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD	3
2	SAR DISTRIBUTION PLOTS, PCS 1900 BODY	7
3	SAR Z-AXIS SCANS (VALIDATION)	9
4	SAR Z-AXIS SCANS (MEASUREMENTS)	11

1 SAR Distribution Plots, PCS 1900 Head

Test Laboratory: IMST

DUT: Alcatel ; Type: ONE TOUCH 331 P; Serial: 330587533874290

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900 MHz ($\sigma = 1.38$ mho/m, $\epsilon_r = 39.3$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(5.2, 5.2, 5.2); Calibrated: 21.03.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM 4.0; Serial: 1176

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

cheek left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.79 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.223 mW/g

cheek left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.122 mW/g

Reference Value = 9.79 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.261 mW/g

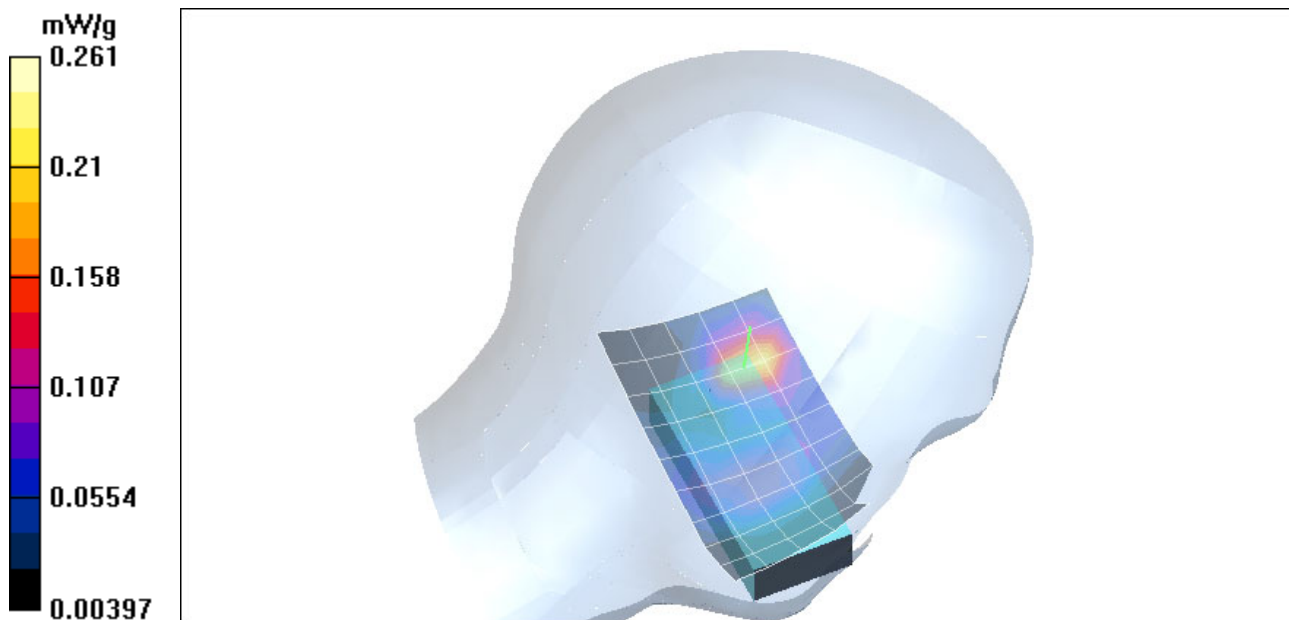


Fig. 1: SAR distribution for PCS 1900, channel 661, cheek position, left side of head. (25.06.2003; Ambient Temperature: 21.5° C; Liquid Temperature: 20.1° C).

Test Laboratory: IMST

File Name: [331plm_2.da4](#)

DUT: Alcatel ; Type: ONE TOUCH 331 P; Serial: 330587533874290

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900 MHz ($\sigma = 1.38$ mho/m, $\epsilon_r = 39.3$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(5.2, 5.2, 5.2); Calibrated: 21.03.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM 4.0; Serial: 1176

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

tilted left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.8 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.208 mW/g

tilted left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.109 mW/g

Reference Value = 10.8 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.233 mW/g

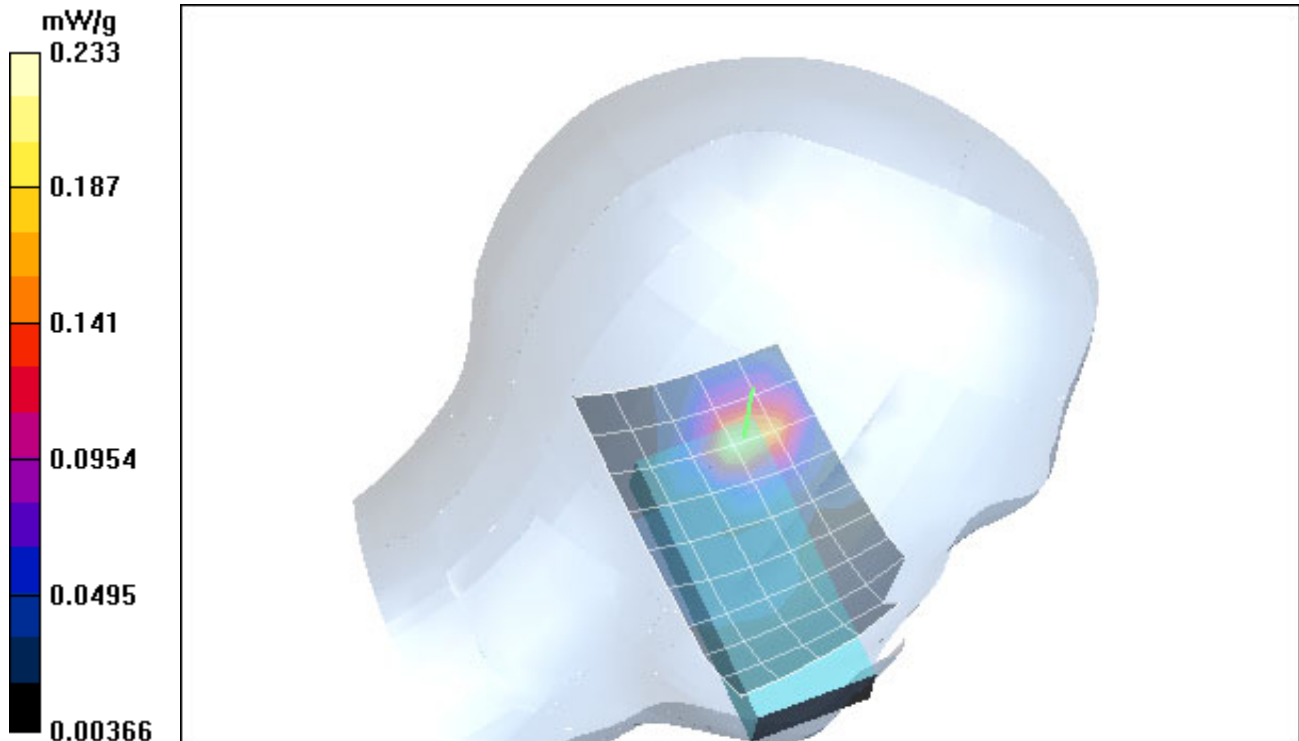


Fig. 2: SAR distribution for PCS 1900, channel 661, tilted position, left side of head. (25.06.2003; Ambient Temperature: 21.7° C; Liquid Temperature : 19.9° C).

Test Laboratory: IMST

File Name: [331prm_1.da4](#)

DUT: Alcatel ; Type: ONE TOUCH 331 P; Serial: 330587533874290

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900 MHz ($\sigma = 1.38$ mho/m, $\epsilon_r = 39.3$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(5.2, 5.2, 5.2); Calibrated: 21.03.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM 4.0; Serial: 1176

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

cheek right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 11.2 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.147 mW/g

cheek right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.16 mW/g; SAR(10 g) = 0.0881 mW/g

Reference Value = 11.2 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.176 mW/g

cheek right/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.146 mW/g; SAR(10 g) = 0.0891 mW/g

Reference Value = 11.2 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.157 mW/g

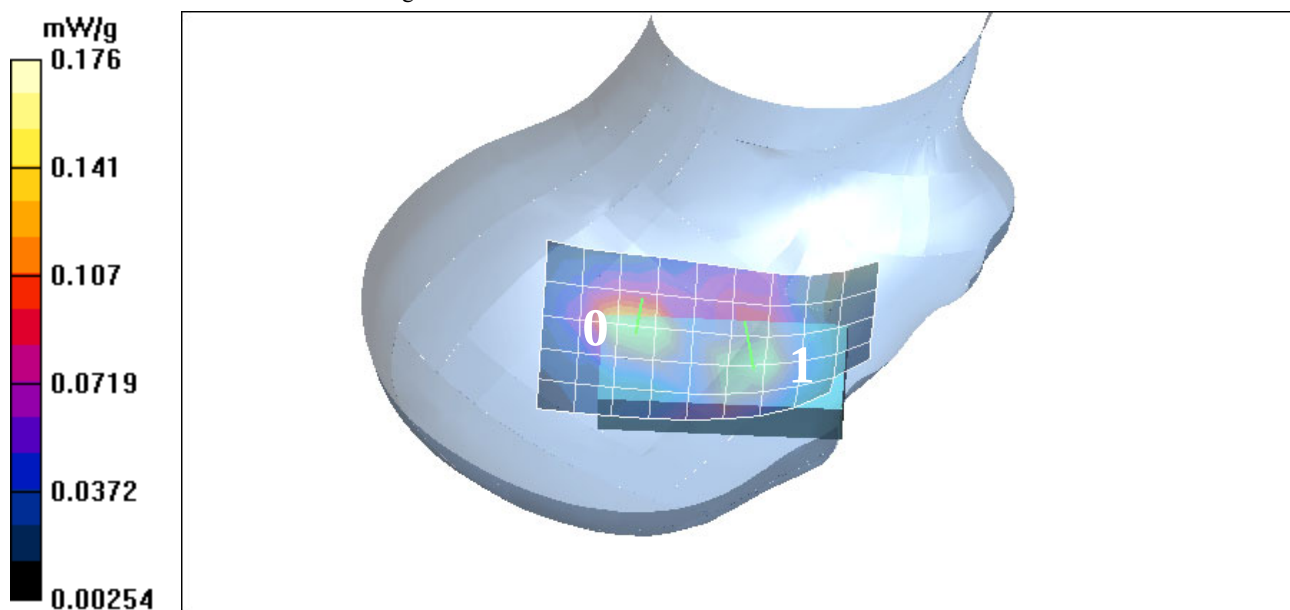


Fig. 3: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (25.06.2003; Ambient Temperature: 21.7° C; Liquid Temperature : 19.9° C).

Test Laboratory: IMST

File Name: [331prm_2.da4](#)

DUT: Alcatel ; Type: ONE TOUCH 331 P; Serial: 330587533874290

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900 MHz ($\sigma = 1.38$ mho/m, $\epsilon_r = 39.3$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(5.2, 5.2, 5.2); Calibrated: 21.03.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM 4.0; Serial: 1176

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

tilted right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 11.8 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.162 mW/g

tilted right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.0881 mW/g

Reference Value = 11.8 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.173 mW/g

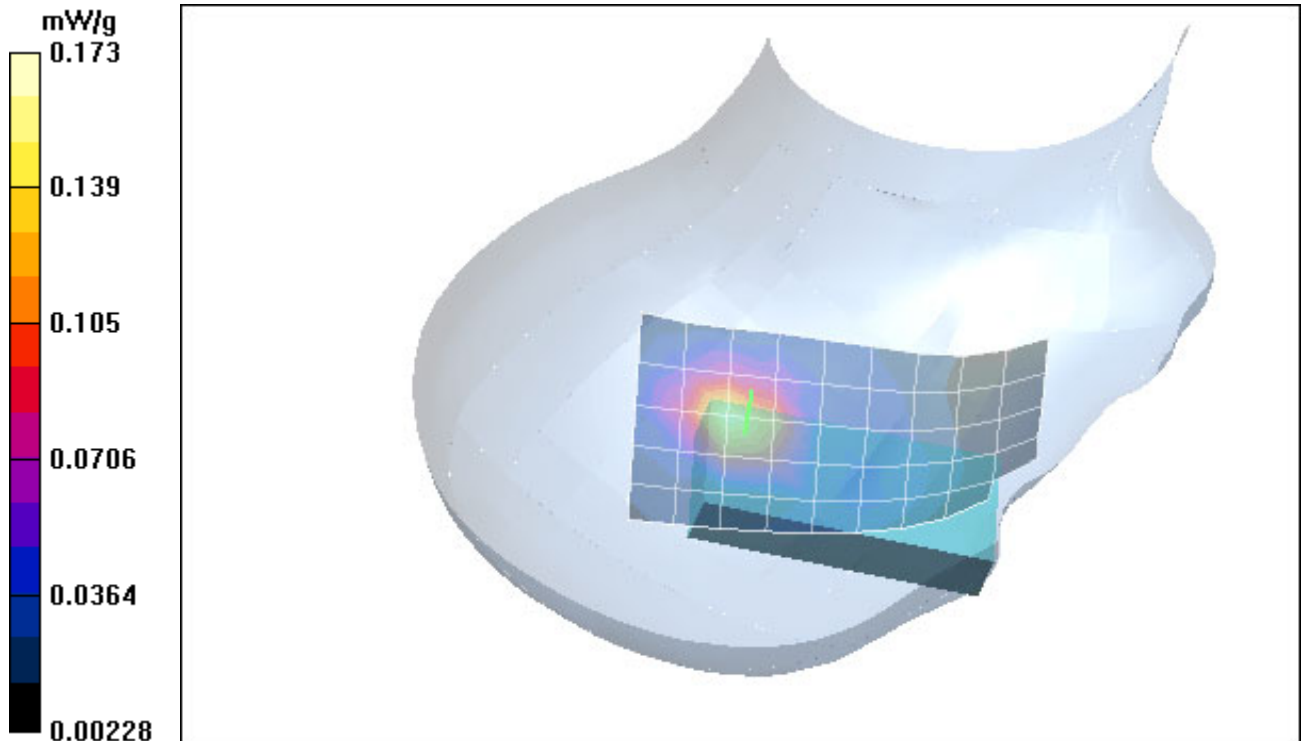


Fig. 4: SAR distribution for PCS 1900, channel 661, tilted position, right side of head. (25.06.2003; Ambient Temperature: 21.8° C; Liquid Temperature : 19.9° C).

2 SAR Distribution Plots, PCS 1900 Body

Test Laboratory: IMST

File Name: [331phm_3.da4](#)

DUT: Alcatel ; Type: ONE TOUCH 331 P; Serial: 330587533874290

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Body1900 MHz ($\sigma = 1.54$ mho/m, $\epsilon_r = 51.4$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.8, 4.8, 4.8); Calibrated: 21.03.2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.05.2003
- Phantom: SAM TP:1176; Type: SAM; Serial: 1176
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Unnamed procedure/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.92 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.408 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.216 mW/g

Reference Value = 9.92 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.416 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.187 mW/g

Reference Value = 9.92 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.374 mW/g

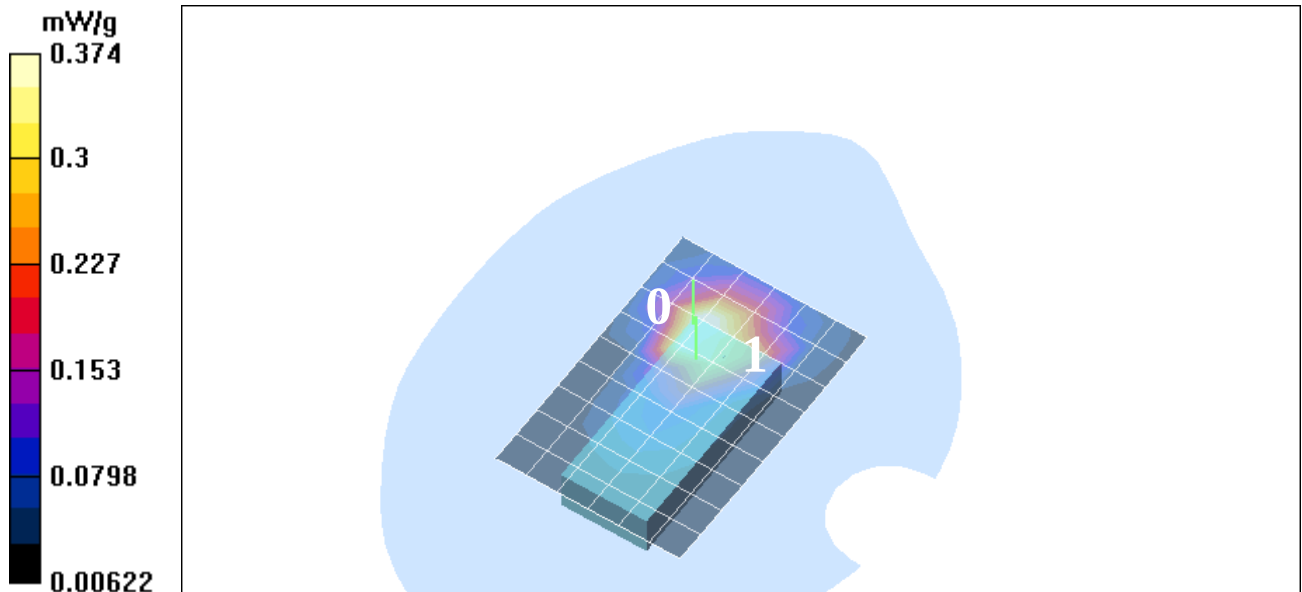


Fig. 5: SAR distribution for belt clip with headset, PCS 1900, channel 661, display towards the ground. (26.05.2003; Ambient Temperature: 21.1° C; Liquid Temperature : 20.7° C).

Test Laboratory: IMST

File Name: [331phm_4.da4](#)

DUT: Alcatel ; Type: ONE TOUCH 331 P; Serial: 330587533874290

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Body1900 MHz ($\sigma = 1.54$ mho/m, $\epsilon_r = 51.4$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.8, 4.8, 4.8); Calibrated: 21.03.2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.05.2003
- Phantom: SAM TP:1176; Type: SAM; Serial: 1176
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Unnamed procedure/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 5.41 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.149 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.0669 mW/g

Reference Value = 5.41 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.169 mW/g

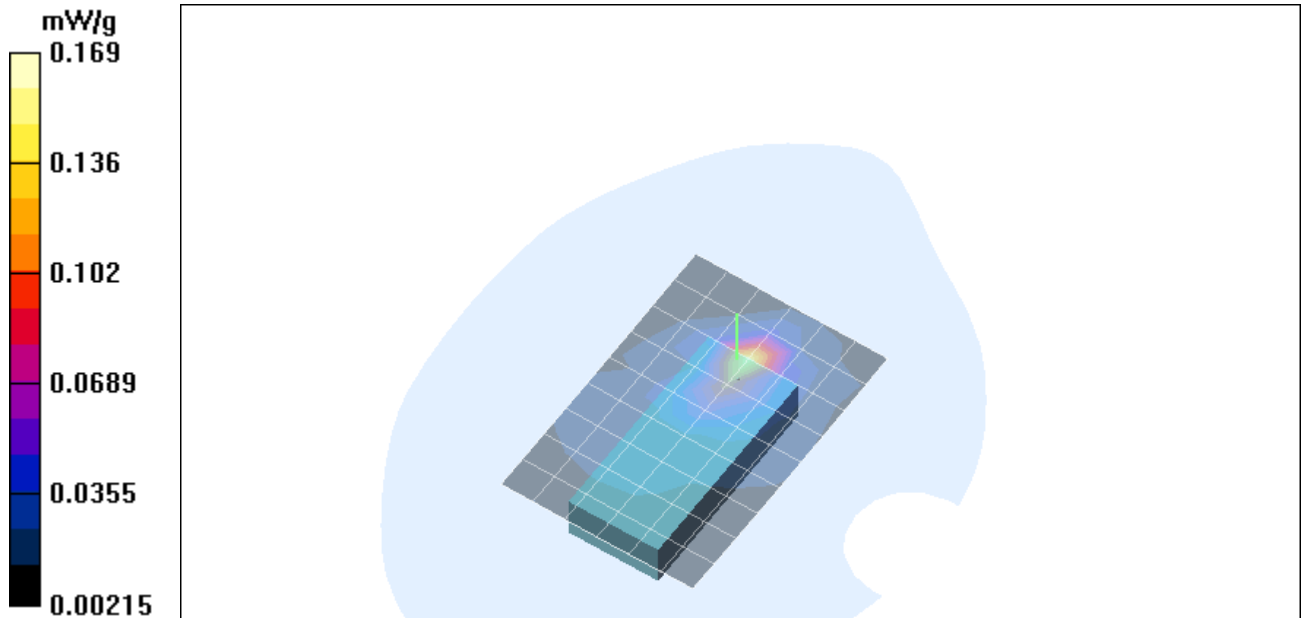


Fig. 6: SAR distribution for belt clip with headset, PCS 1900, channel 661, display towards the phantom. (26.05.2003; Ambient Temperature: 21.1° C; Liquid Temperature : 19.9° C).

3 SAR z-axis scans (Validation)

The following pictures show the z-axis scan for the worst case values.

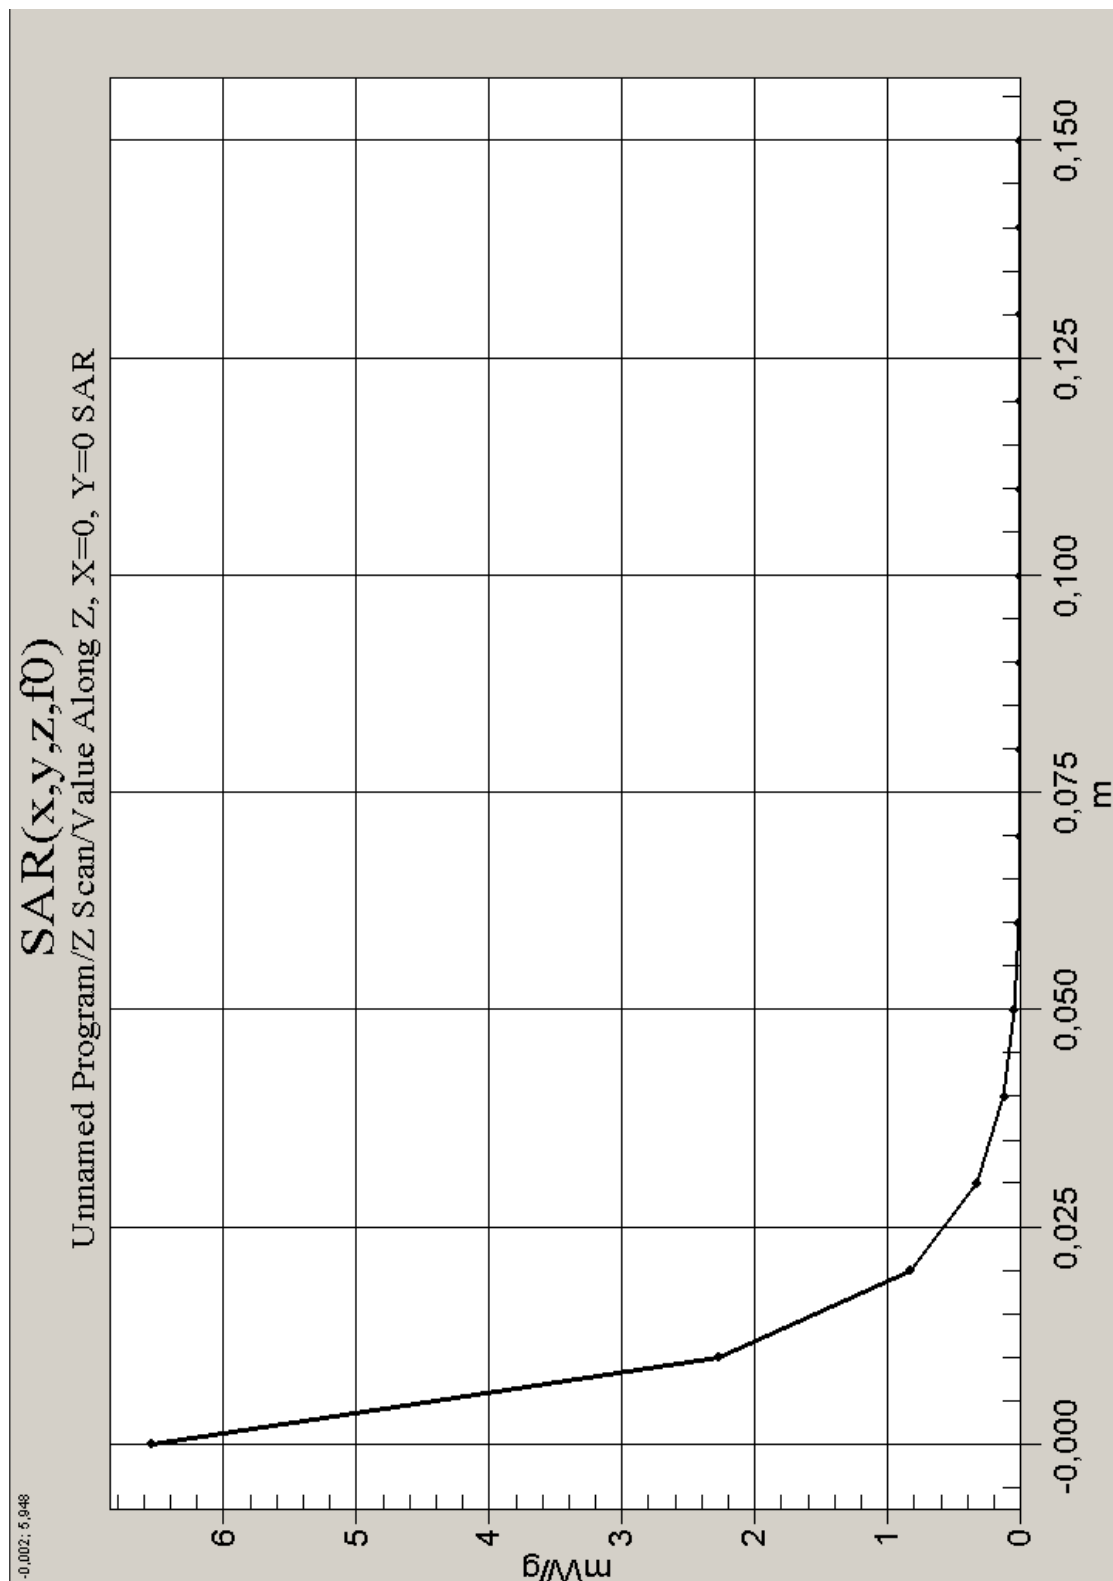


Fig. 7: Validation measurement 1900 MHz Head (25.06.2003), coarse grid. Ambient Temperature: 21.2° C, Liquid Temperature: 20.1° C.

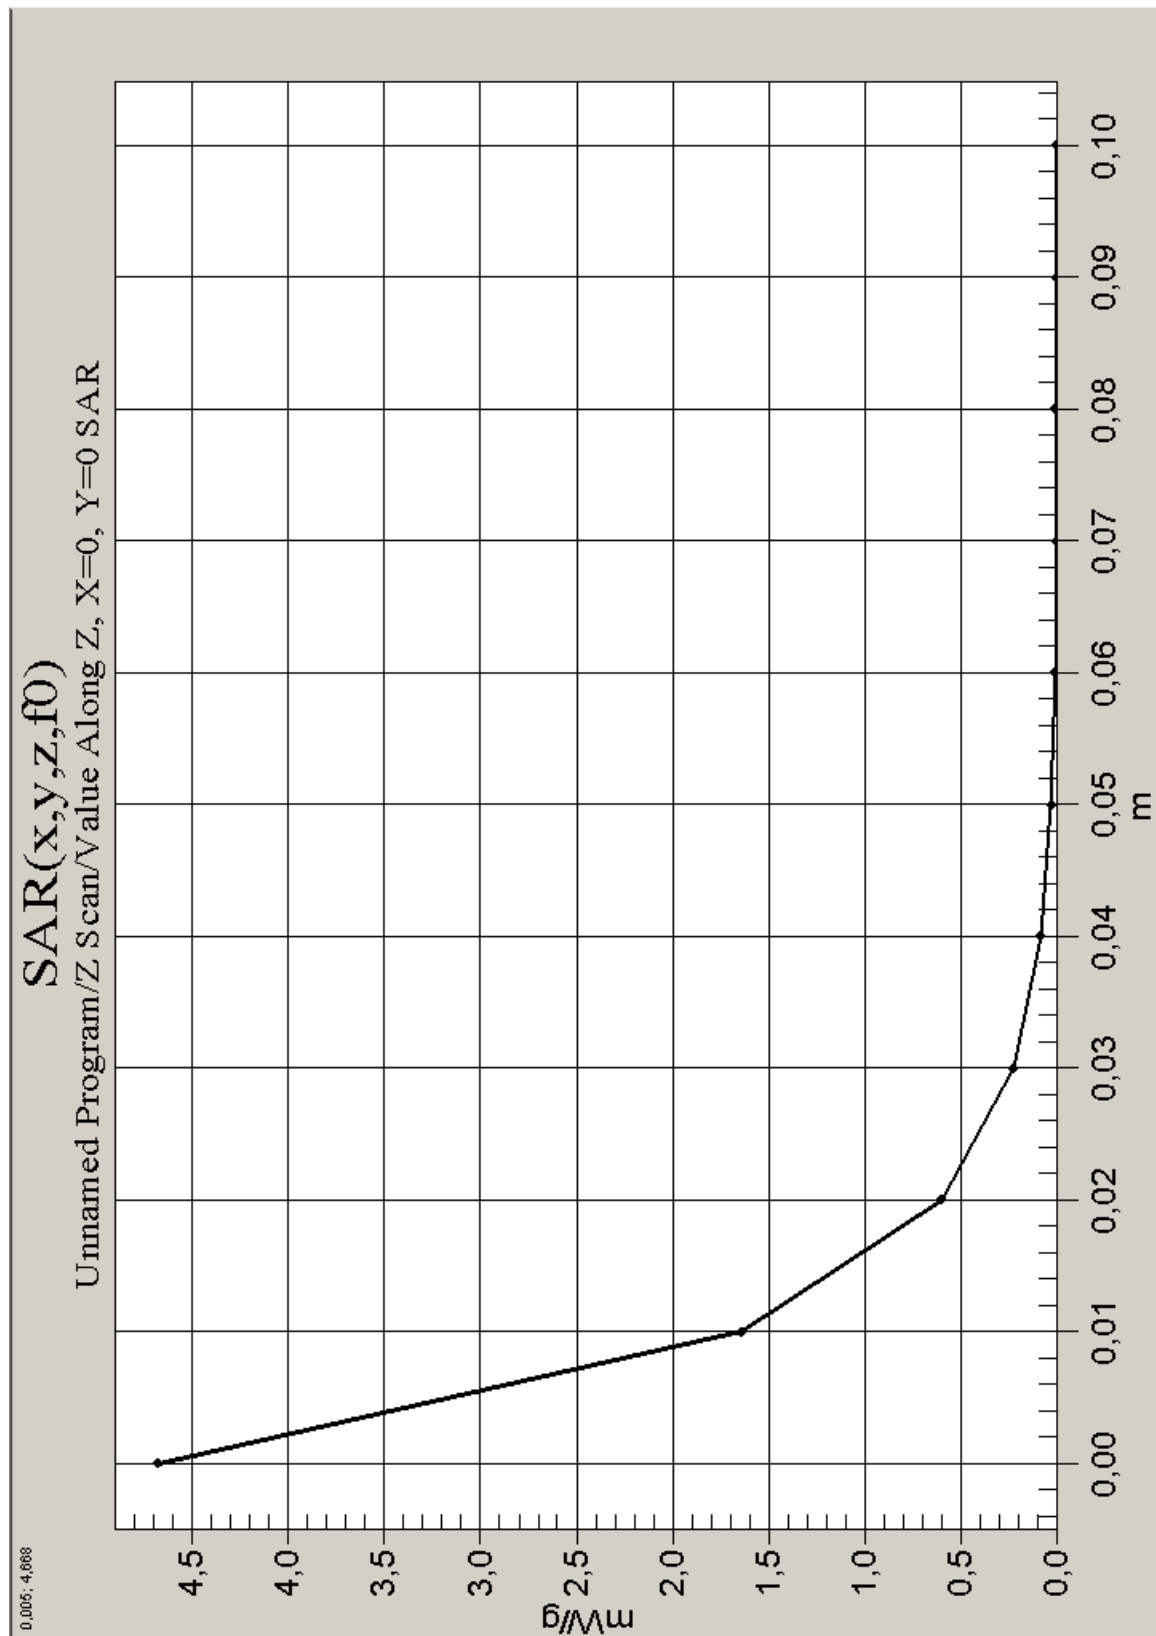


Fig. 8: Validation measurement 1900 MHz body (26.06.2003). Ambient Temperature: 21.0° C, Liquid Temperature: 20.5° C

4 SAR z-axis scans (Measurements)

The following pictures show the z-axis scan for the worst case values.

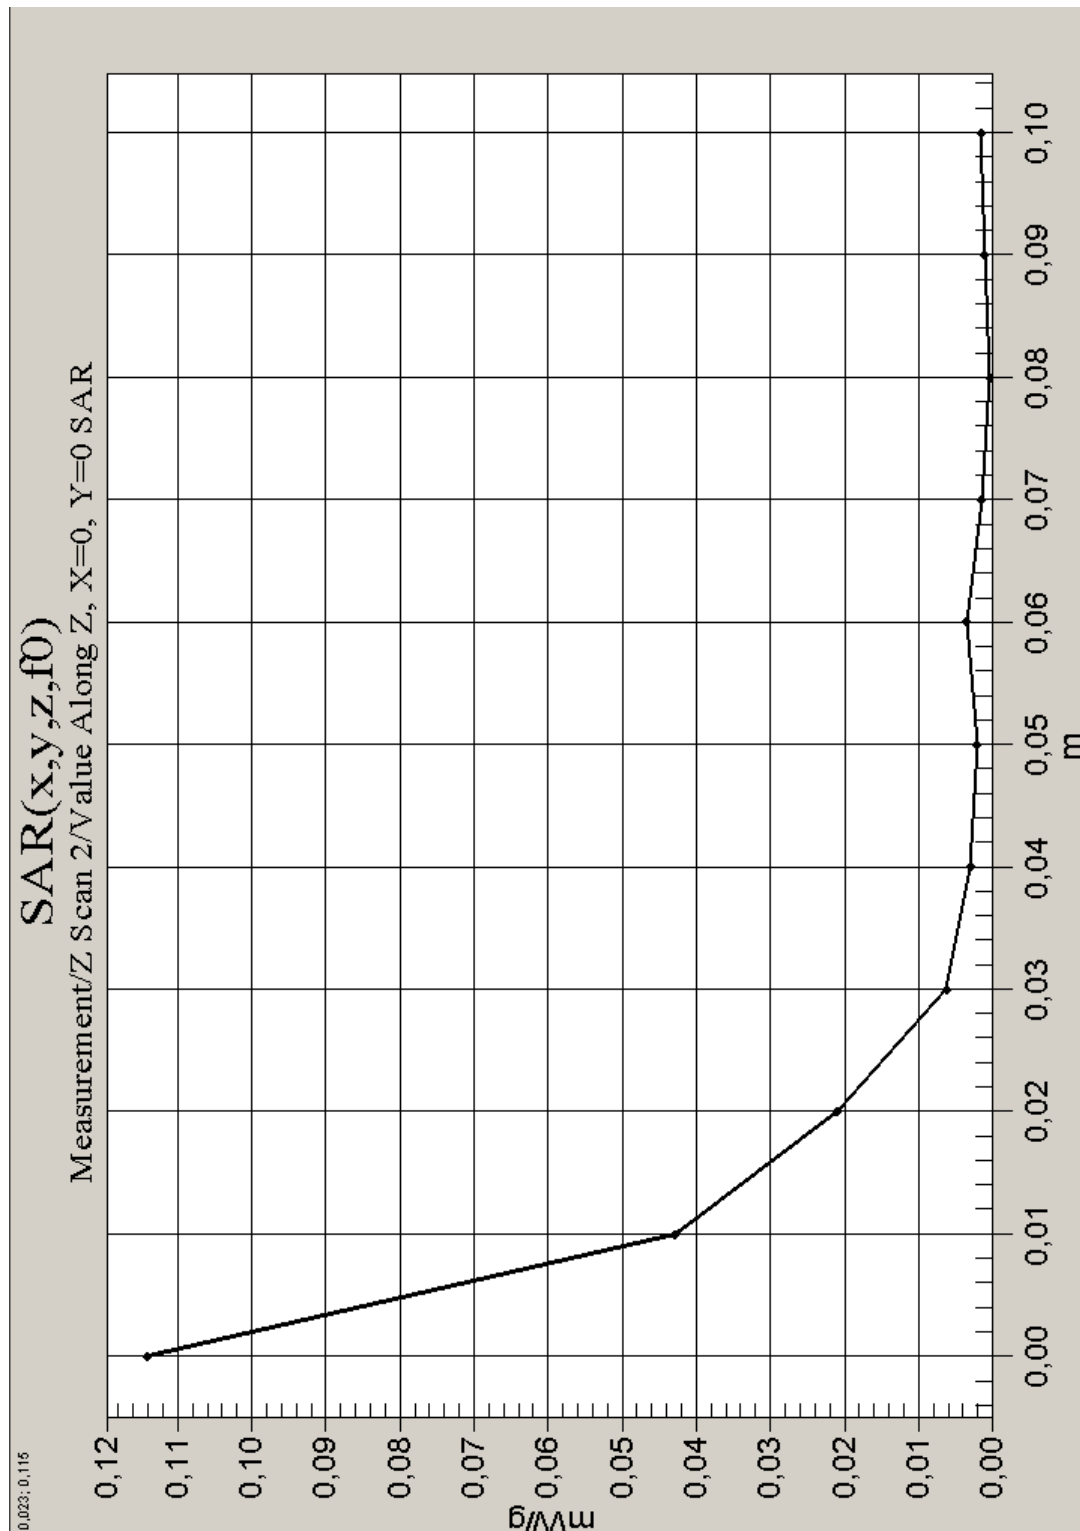


Fig. 9: PCS 1900, cheek position, left side of head, channel 661 (25.06.2003; Ambient Temperature: 21.5° C; Liquid Temperature : 20.1° C).

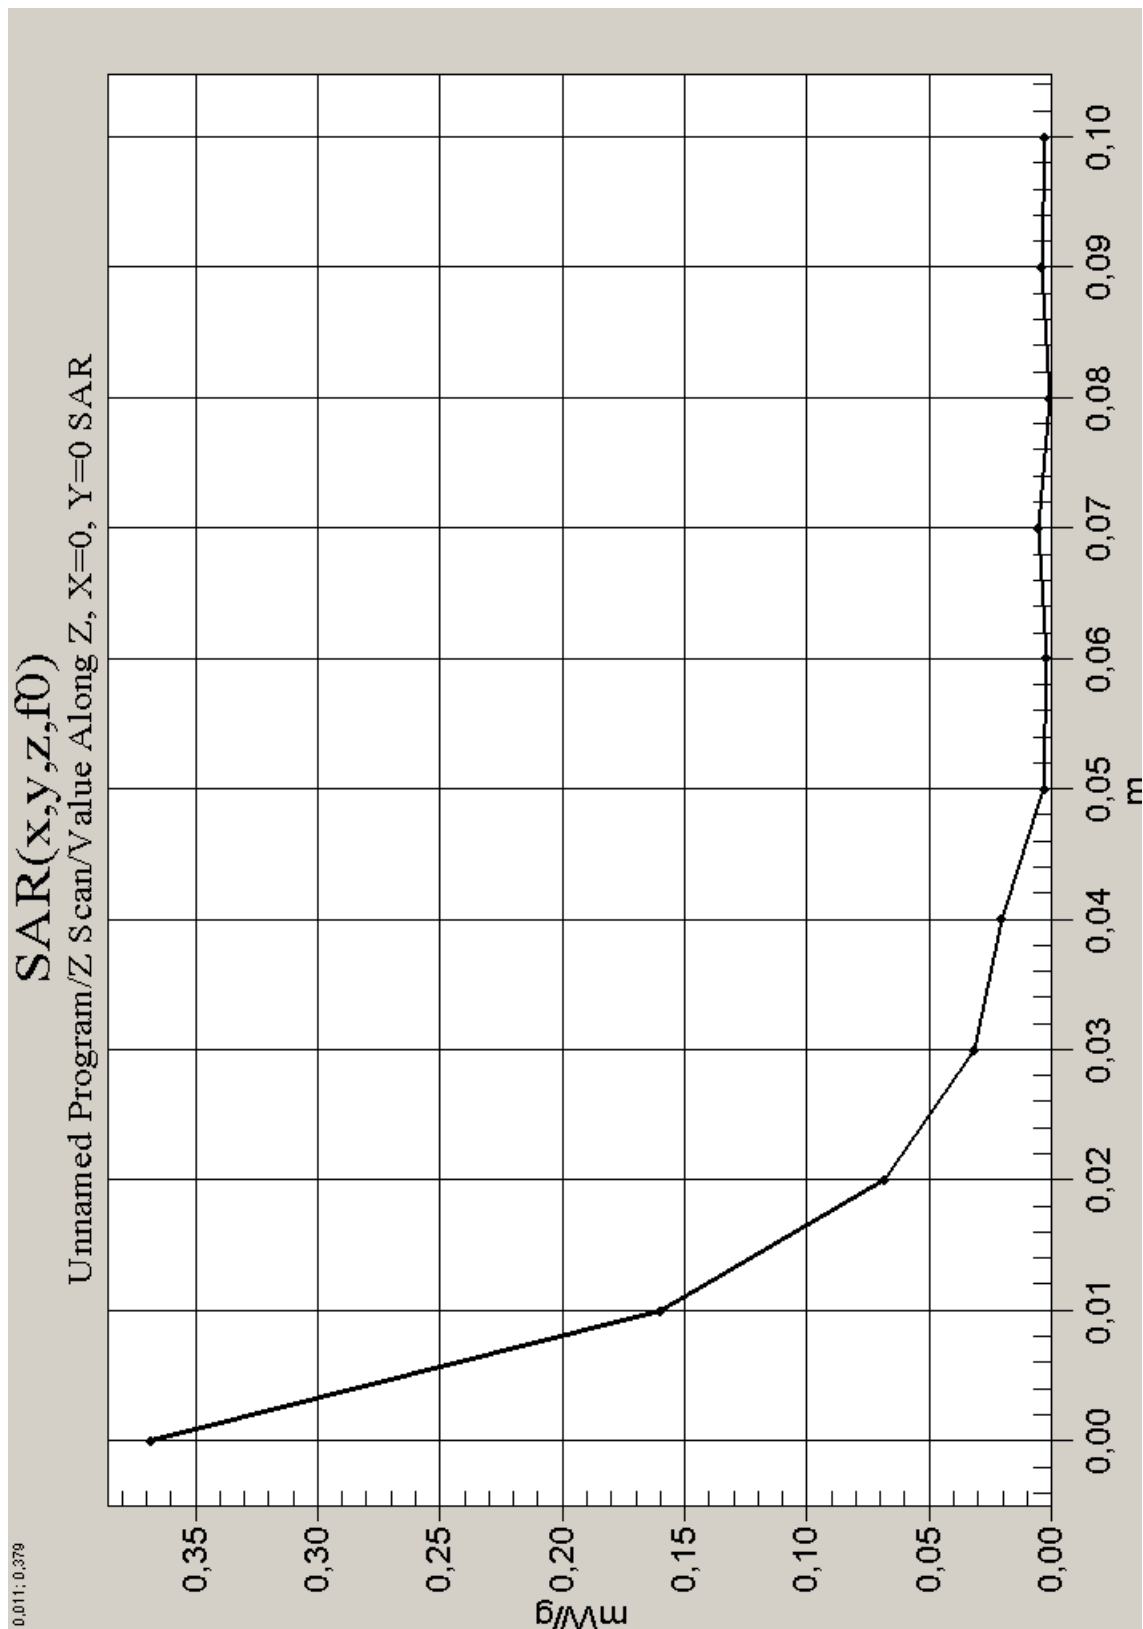


Fig. 10: PCS 1900, channel 661, belt clip with headset, display towards the ground. (26.05.2003; Ambient Temperature: 21.1° C; Liquid Temperature : 20.7° C).