



# FCC Part 15C TEST REPORT

TESTING  
CNAS L3572

Issued to

Giant Telecom Ltd.

For

Bluetooth Wireless PTT

Model Name: 1693  
Trade Name: Motorola  
Brand Name: N/A  
FCC ID: RAQ1693  
Standard: 47 CFR Part 15 Subpart C  
Test date: 2013-5-9 to 2013-7-31  
Issue date: 2013-7-31

Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Nie Quan  
Nie Quan  
(Test Engineer)

Date 2013.7.31

Approved by Zeng Dexin  
Zeng Dexin  
(Department Manager)

Date 2013.7.31

Review by Peng Huarui  
Peng Huarui  
(Project Manager)

Date 2013.7.31

CTIA Authorized Test Lab  
LAB CODE 30081223-00  
IEEE 1725

OFTA  
電訊管理局



GCF  
Official Observer of  
Global Certification Forum

Bluetooth  
BQTF

FCC  
Reg. No.  
695796

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

## DIRECTORY

|                                                       |          |
|-------------------------------------------------------|----------|
| <b>1. GENERAL INFORMATION .....</b>                   | <b>3</b> |
| 1.1. EUT Description .....                            | 3        |
| 1.2. Test Standards and Results.....                  | 4        |
| 1.3. Facilities and Accreditations .....              | 5        |
| <b>2. 47 CFR PART 15C REQUIREMENTS.....</b>           | <b>6</b> |
| 2.1. Antenna requirement.....                         | 6        |
| 2.2. Number of Hopping Frequency .....                | 6        |
| 2.3. Peak Output Power.....                           | 11       |
| 2.4. 20dB Bandwidth .....                             | 13       |
| 2.5. Carried Frequency Separation.....                | 20       |
| 2.6. Time of Occupancy (Dwell time) .....             | 23       |
| 2.7. Conducted Spurious Emissions and Band Edge ..... | 28       |
| 2.8. Restricted Frequency Bands.....                  | 41       |
| 2.9. Conducted Emission .....                         | 51       |
| 2.10. Radiated Emission.....                          | 54       |
| 2.11. RF exposure evaluation.....                     | 73       |

| Change History |               |                   |
|----------------|---------------|-------------------|
| Issue          | Date          | Reason for change |
| 1.0            | July 31, 2013 | First edition     |
|                |               |                   |
|                |               |                   |

## 1. General Information

### 1.1. EUT Description

EUT Type .....: Bluetooth Wireless PTT

Serial No.....: (n.a, marked #1 by test site)

Hardware Version .....: N/A

Software Version .....: N/A

Applicant .....: Giant Telecom Ltd.  
33/F, AIA Kowloon Tower, Landmark East, 100 How Ming Street,  
Kwun Tong , Kowloon

Manufacturer .....: DONGGUAN WISETRONICS TELECOM EQUIPMENT CO.  
LTD  
Elite Industrial City, Melin District, Dailing Mount Town,  
Dongguan Guangdong, China

Frequency Range.....: The frequency range used is 2402MHz - 2480MHz (79 channels, at  
intervals of 1MHz);  
The frequency block is 2400MHz to 2483.5MHz.

Modulation Type .....: Bluetooth: FHSS (GFSK(1Mbps),  $\pi/4$ -DQPSK(EDR 2Mbps),  
8-DPSK(EDR 3Mbps))

Antenna Type.....: Patch Antenna

Antenna Gain.....: 2.5dBi

Note 1: The EUT is a Bluetooth Wireless PTT, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is  $F(\text{MHz})=2402+1*n$  ( $0 \leq n \leq 78$ ). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 3: a. When power on, the EUT will scan the whole frequency until a Connection command from the other BT devices.

b. When receiving the signal from the other BT devices, The EUT transmit a response signal.

c. The other devices receive the response signal and recognize it, then send a connection command to establish the connection.

d. After the connection establish successfully, the data transmission is beginning. At the same time, the both devices will shift frequencies in synchronization per a same pseudo randomly ordered list of hopping frequencies, the hopping rate is 1600 times per second. This device conforms to the criteria in FCC Public Notice DA 00-705.

e. The bandwidth of the receiver, which is set to a fixed width by the software.

Note 4: Bluetooth signal has 9 packages DH1, DH3, DH5, 3DH1, 3DH3, 3DH5, 5DH1, 5DH3, 5DH5, DH5 package is largest, we are testing DH5 in the document.

## 1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

| No. | Identity                            | Document Title          |
|-----|-------------------------------------|-------------------------|
| 1   | 47 CFR Part 15<br>(10-1-09 Edition) | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section in CFR 47             | Description                                  | Result |
|-----|-------------------------------|----------------------------------------------|--------|
| 1   | 15.203                        | Antenna Requirement                          | PASS   |
| 2   | 15.247(a)                     | Number of Hopping Frequency                  | PASS   |
| 3   | 15.247(b)                     | Peak Output Power                            | PASS   |
| 4   | 15.247(a)                     | 20dB Bandwidth                               | PASS   |
| 5   | 15.247(a)                     | Carrier Frequency Separation                 | PASS   |
| 6   | 15.247(a)                     | Time of Occupancy (Dwell time)               | PASS   |
| 7   | 15.247(d)                     | Conducted Spurious Emission<br>and Band Edge | PASS   |
| 8   | 15.247(d)                     | Restricted Frequency Bands                   | PASS   |
| 9   | 15.207                        | Conducted Emission                           | PASS   |
| 10  | 15.209<br>15.247(d)           | Radiated Emission                            | PASS   |
| 11  | 15.247(i).<br>§ 1.1307&2.1093 | RF exposure evaluation                       | PASS   |

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.

### **1.3. Facilities and Accreditations**

#### **1.3.1. Facilities**

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

#### **1.3.2. Test Environment Conditions**

During the measurement, the environmental conditions were within the listed ranges:

|                             |         |
|-----------------------------|---------|
| Temperature (°C):           | 15 - 35 |
| Relative Humidity (%):      | 30 -60  |
| Atmospheric Pressure (kPa): | 86-106  |

## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


## 2.2. Number of Hopping Frequency

### 2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

### 2.2.2. Test Description

#### A. Test Setup:

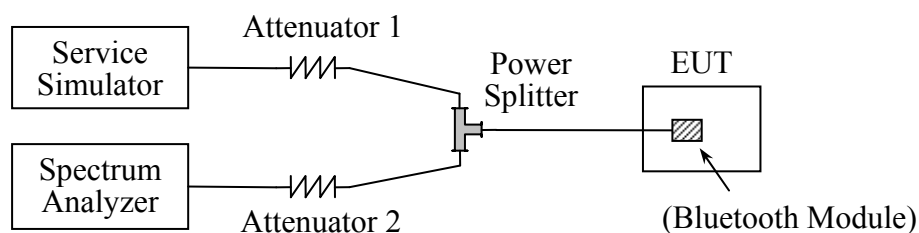

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

| Description       | Manufacturer | Model   | Serial No. | Cal. Date  | Cal. Due   |
|-------------------|--------------|---------|------------|------------|------------|
| System Simulator  | Anritsu      | MT8852B | 6K00006210 | 2013.05.12 | 2014.05.11 |
| Spectrum Analyzer | Agilent      | E7405A  | US44210471 | 2013.05.12 | 2014.05.11 |

| Description    | Manufacturer | Model | Serial No. | Cal. Date  | Cal. Due   |
|----------------|--------------|-------|------------|------------|------------|
| Power Splitter | Weinschel    | 1506A | NW521      | 2013.05.12 | 2014.05.11 |
| Attenuator 1   | Resnet       | 10dB  | (n.a.)     | 2013.05.12 | 2014.05.11 |
| Attenuator 2   | Resnet       | 3dB   | (n.a.)     | 2013.05.12 | 2014.05.11 |

### 2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize



### 2.2.4. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

Test Verdict:



| Test Mode      | Frequency Block (MHz) | Measured Channel Numbers | Min. Limit | Refer to Plot | Verdict |
|----------------|-----------------------|--------------------------|------------|---------------|---------|
| GFSK           | 2400 - 2483.5         | 79                       | 15         | Plot A        | PASS    |
| $\pi/4$ -DQPSK | 2400 - 2483.5         | 79                       | 15         | Plot B        | PASS    |
| 8-DPSK         | 2400 - 2483.5         | 79                       | 15         | Plot C        | PASS    |

**Test Plots:**

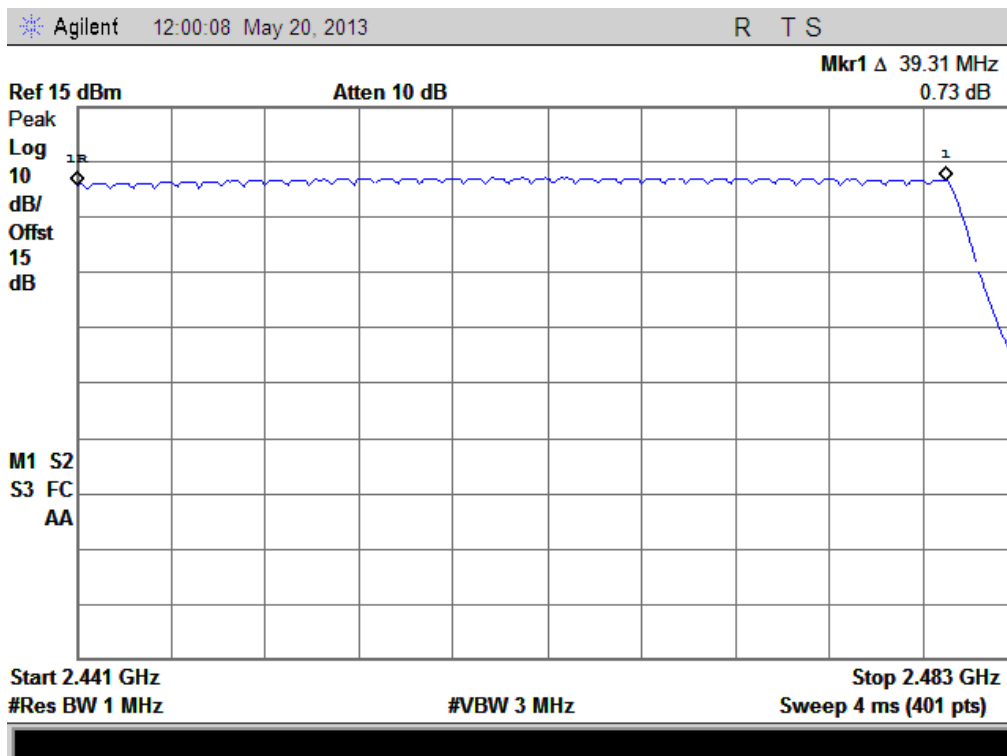
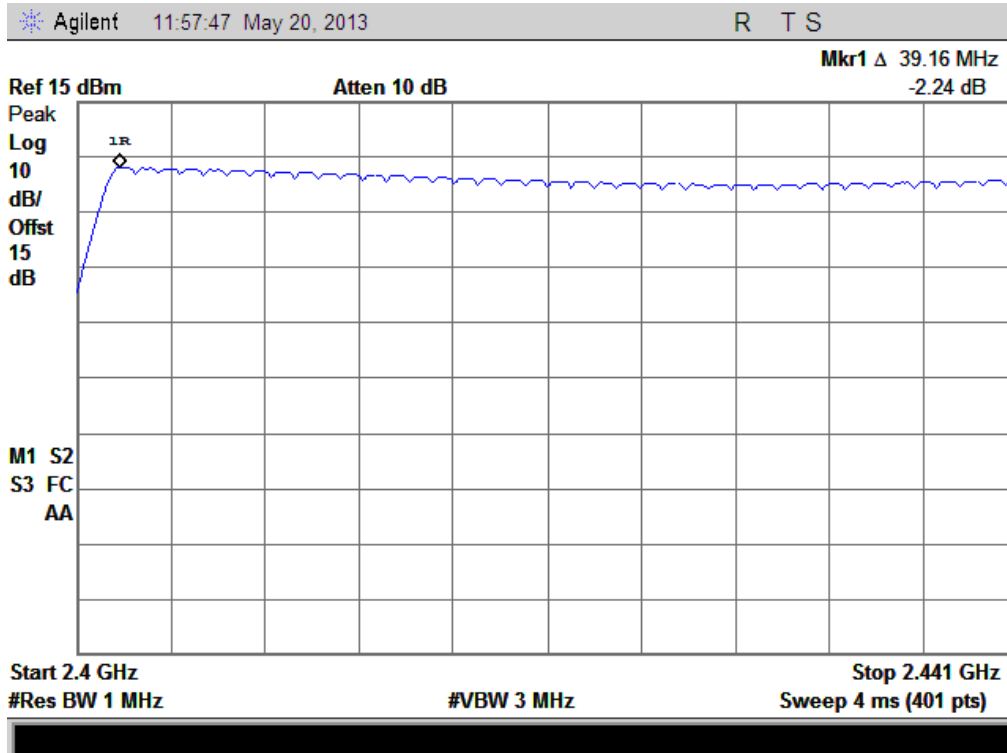


(Plot A: GFSK)



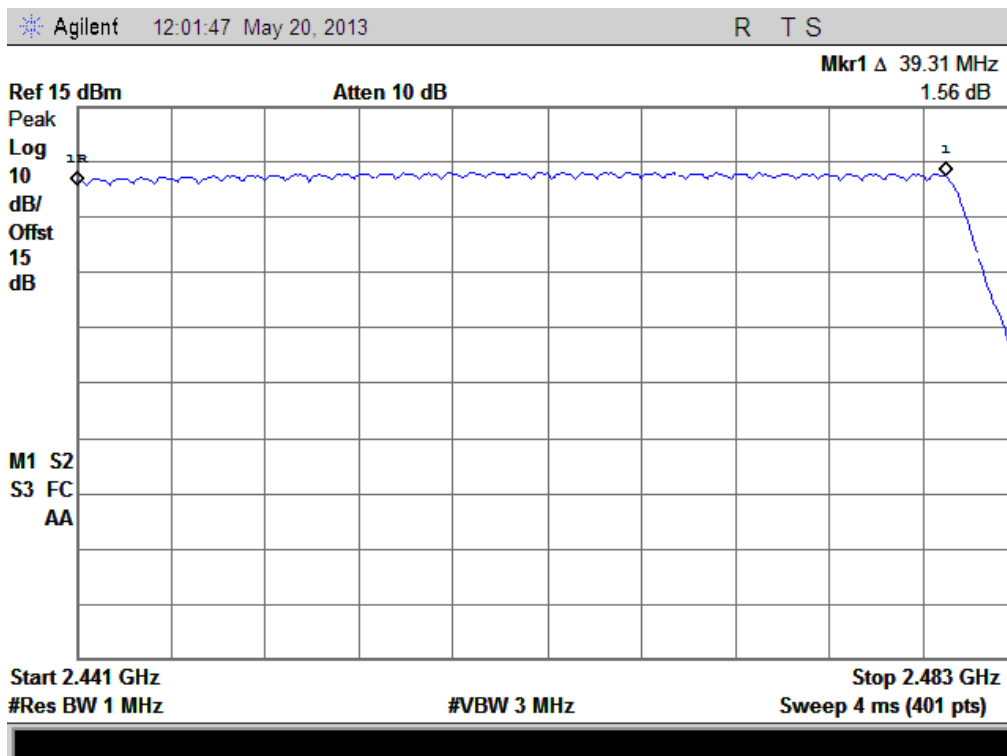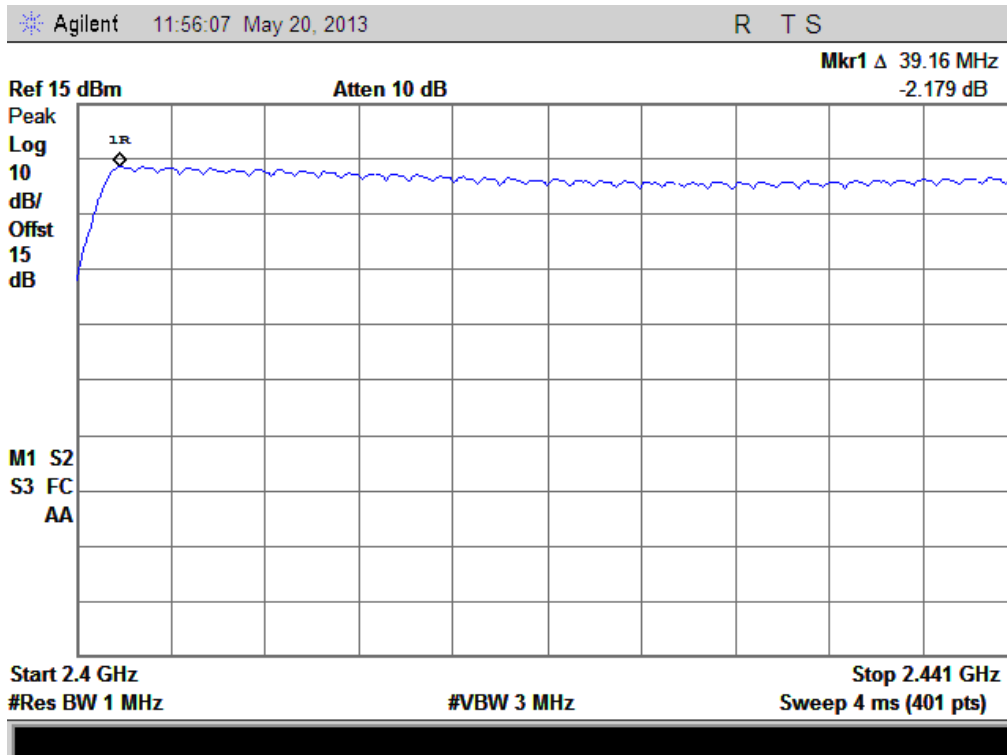

(Plot B:  $\Pi/4$ -DQPSK)

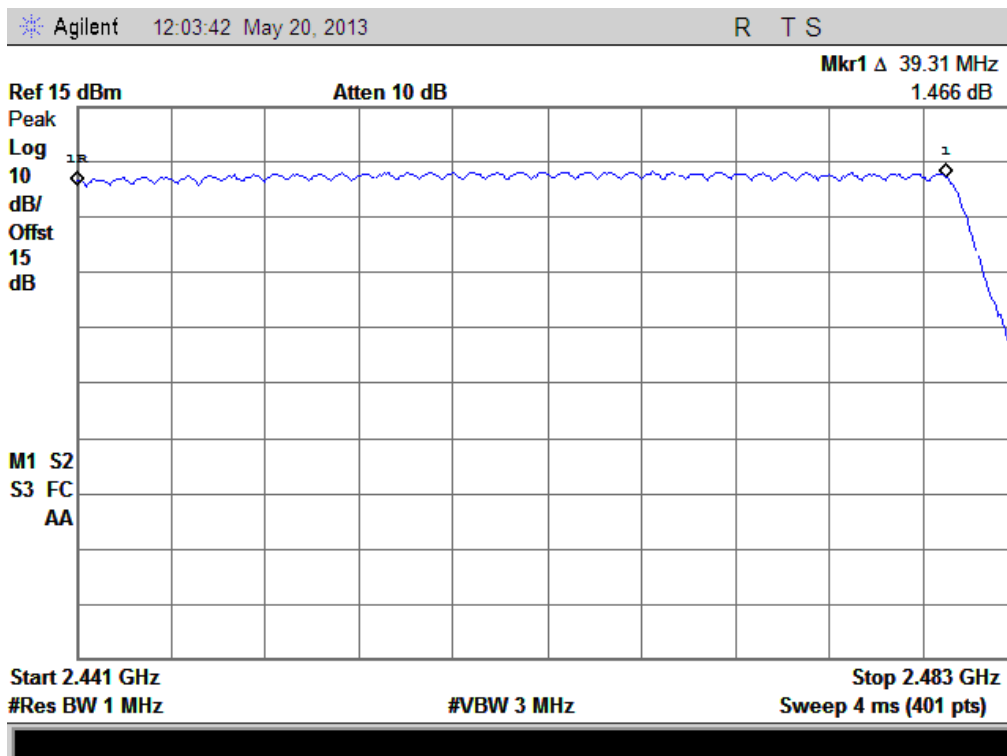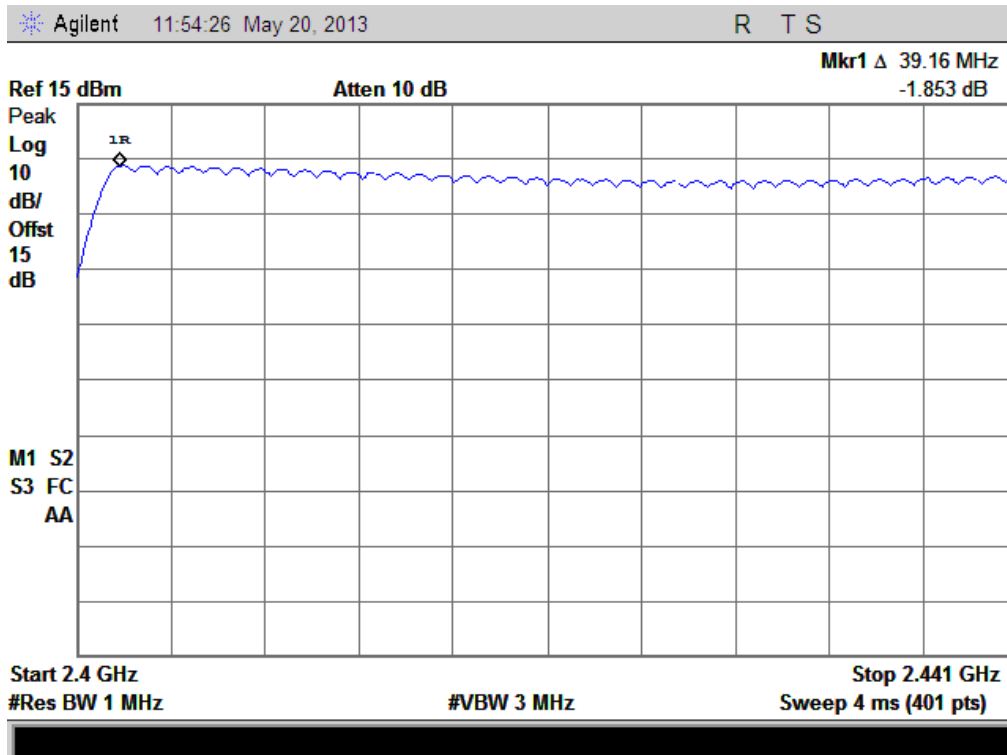

(Plot C: 8- DPSK)


## 2.3. Peak Output Power

### 2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### 2.3.2. Test Description

#### A. Test Setup:

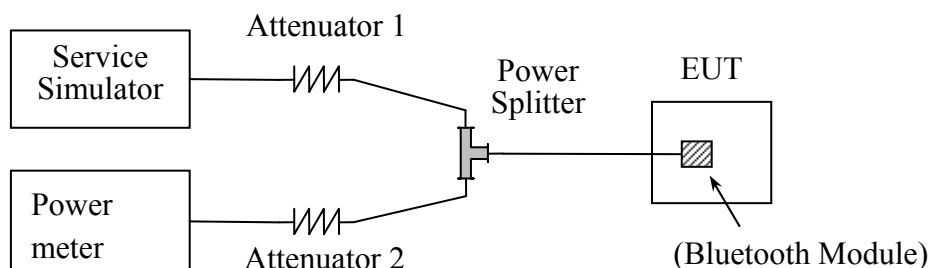

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Power meter and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

| Description      | Manufacturer | Model   | Serial No. | Cal. Date  | Cal. Due   |
|------------------|--------------|---------|------------|------------|------------|
| System Simulator | Anritsu      | MT8852B | 6K00006210 | 2013.05.12 | 2014.05.11 |
| Power meter      | Agilent      | E4418B  | GB44318055 | 2013.05.12 | 2014.05.11 |
| Power Splitter   | Weinschel    | 1506A   | NW521      | 2013.05.12 | 2014.05.11 |
| Power Sensor     | Agilent      | 8482A   | MY41091706 | 2013.05.12 | 2014.05.11 |
| Attenuator 1     | Resnet       | 10dB    | (n.a.)     | 2013.05.12 | 2014.05.11 |
| Attenuator 2     | Resnet       | 3dB     | (n.a.)     | 2013.05.12 | 2014.05.11 |

### 2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module. The lowest, middle and highest channel were tested by Power meter.

### 2.3.3.1. GFSK Mode

#### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |       | Verdict |
|---------|-----------------|----------------------------|----------|-------|-------|---------|
|         |                 | dBm                        | W        | dBm   | W     |         |
| 0       | 2402            | 2.881                      | 0.001941 | 20.97 | 0.125 | PASS    |
| 39      | 2441            | 0.773                      | 0.001195 |       |       | PASS    |
| 78      | 2480            | 1.350                      | 0.001365 |       |       | PASS    |

### 2.3.3.2. $\pi/4$ -DQPSK Mode

#### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |       | Verdict |
|---------|-----------------|----------------------------|----------|-------|-------|---------|
|         |                 | dBm                        | W        | dBm   | W     |         |
| 0       | 2402            | 3.529                      | 0.002254 | 20.97 | 0.125 | PASS    |
| 39      | 2441            | 1.510                      | 0.001416 |       |       | PASS    |
| 78      | 2480            | 2.365                      | 0.001724 |       |       | PASS    |

### 2.3.3.3. 8-DPSK Mode

#### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |       | Verdict |
|---------|-----------------|----------------------------|----------|-------|-------|---------|
|         |                 | dBm                        | W        | dBm   | W     |         |
| 0       | 2402            | 3.639                      | 0.002312 | 20.97 | 0.125 | PASS    |
| 39      | 2441            | 1.650                      | 0.001462 |       |       | PASS    |
| 78      | 2480            | 2.563                      | 0.001804 |       |       | PASS    |


## 2.4. 20dB Bandwidth

### 2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ( $10 \cdot \log 1\% = 20\text{dB}$ ) taking the total RF output power.

### 2.4.2. Test Description

#### A. Test Setup:

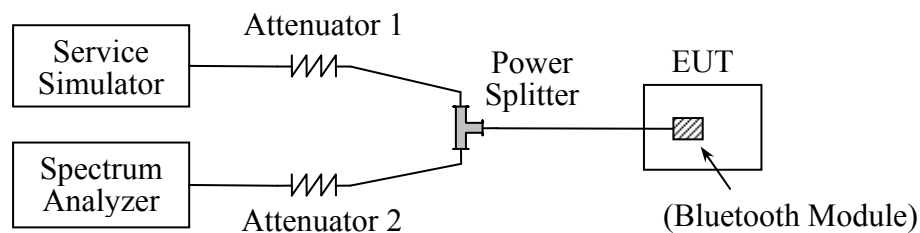

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

| Description       | Manufacturer | Model   | Serial No. | Cal. Date  | Cal. Due   |
|-------------------|--------------|---------|------------|------------|------------|
| System Simulator  | Anritsu      | MT8852B | 6K00006210 | 2013.05.12 | 2014.05.11 |
| Spectrum Analyzer | Agilent      | E7405A  | US44210471 | 2013.05.12 | 2014.05.11 |
| Power Splitter    | Weinschel    | 1506A   | NW521      | 2013.05.12 | 2014.05.11 |
| Attenuator 1      | Resnet       | 10dB    | (n.a.)     | 2013.05.12 | 2014.05.11 |
| Attenuator 2      | Resnet       | 3dB     | (n.a.)     | 2013.05.12 | 2014.05.11 |

### 2.4.1. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq$  1% of the 20 dB bandwidth

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

## 2.4.2. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


### 2.4.2.1. GFSK Mode

#### A. Test Verdict:


The maximum 20dB bandwidth measured is 0.9622MHz according to the table below.

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Refer to Plot |
|---------|-----------------|----------------------|---------------|
| 0       | 2402            | 0.9622               | Plot A        |
| 39      | 2441            | 0.9621               | Plot B        |
| 78      | 2480            | 0.9572               | Plot C        |


#### Test Plots:

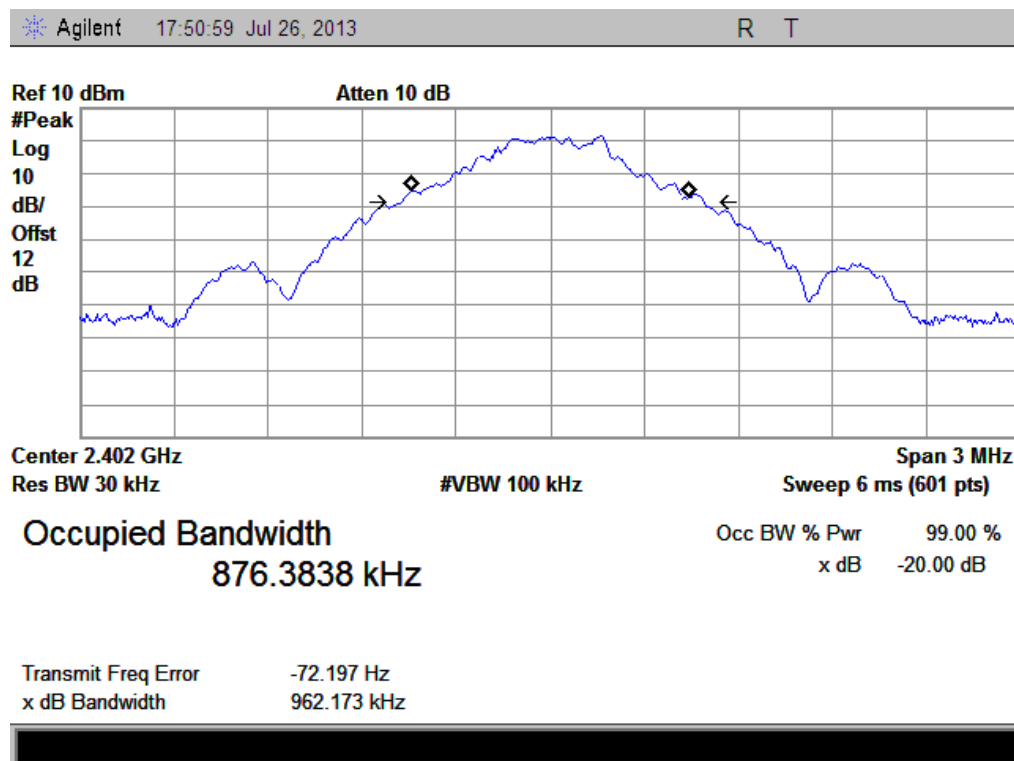

(Plot A: Channel = 2402 @ GFSK)

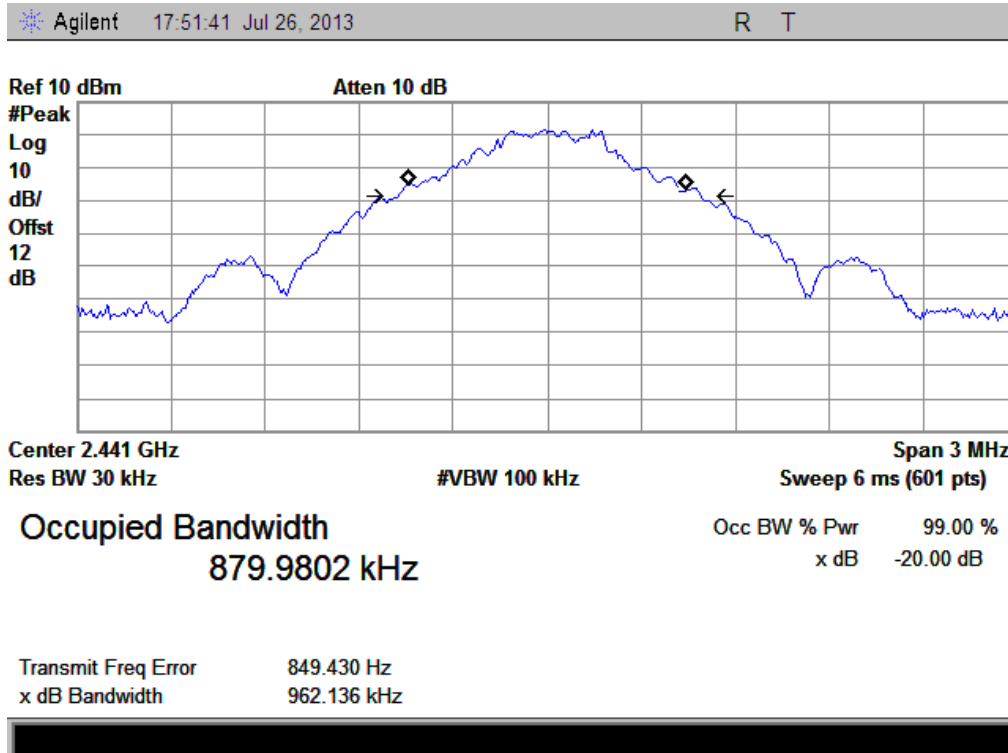

(Plot B: Channel = 2441 @ GFSK)

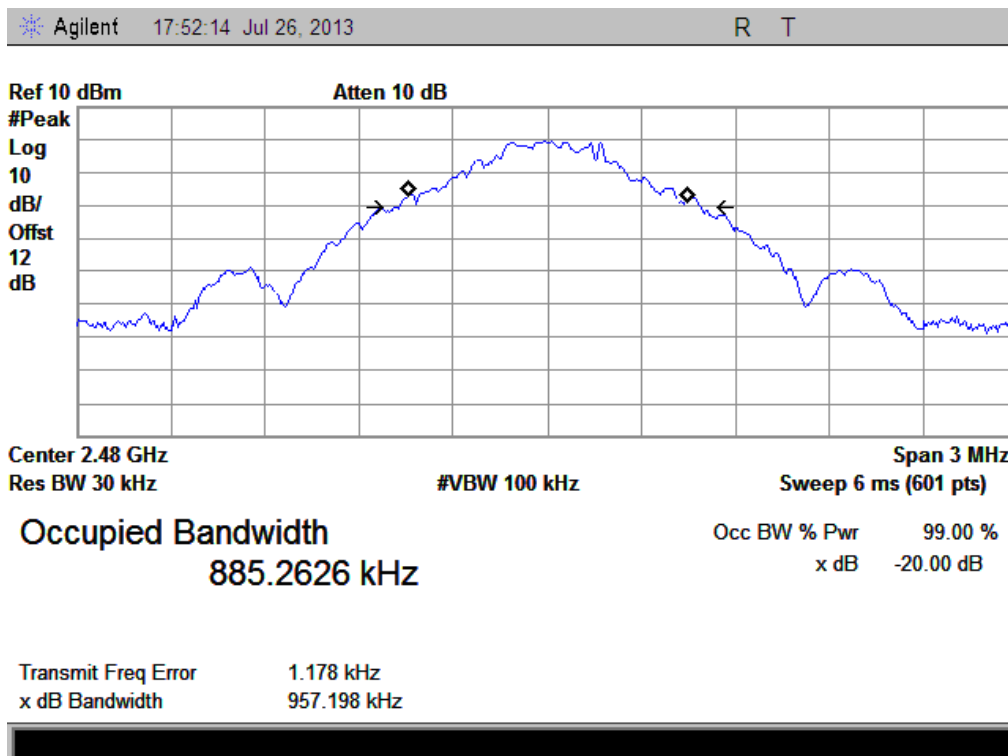

(Plot C: Channel = 2480 @ GFSK)


## 2.4.2.2. $\pi/4$ -DQPSK Mode

### A. Test Verdict:

The maximum 20dB bandwidth measured is 1.2950MHz according to the table below.



| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Refer to Plot |
|---------|-----------------|----------------------|---------------|
| 0       | 2402            | 1.2880               | Plot D        |
| 39      | 2441            | 1.2950               | Plot E        |
| 78      | 2480            | 1.2730               | Plot F        |

### Test Plots:

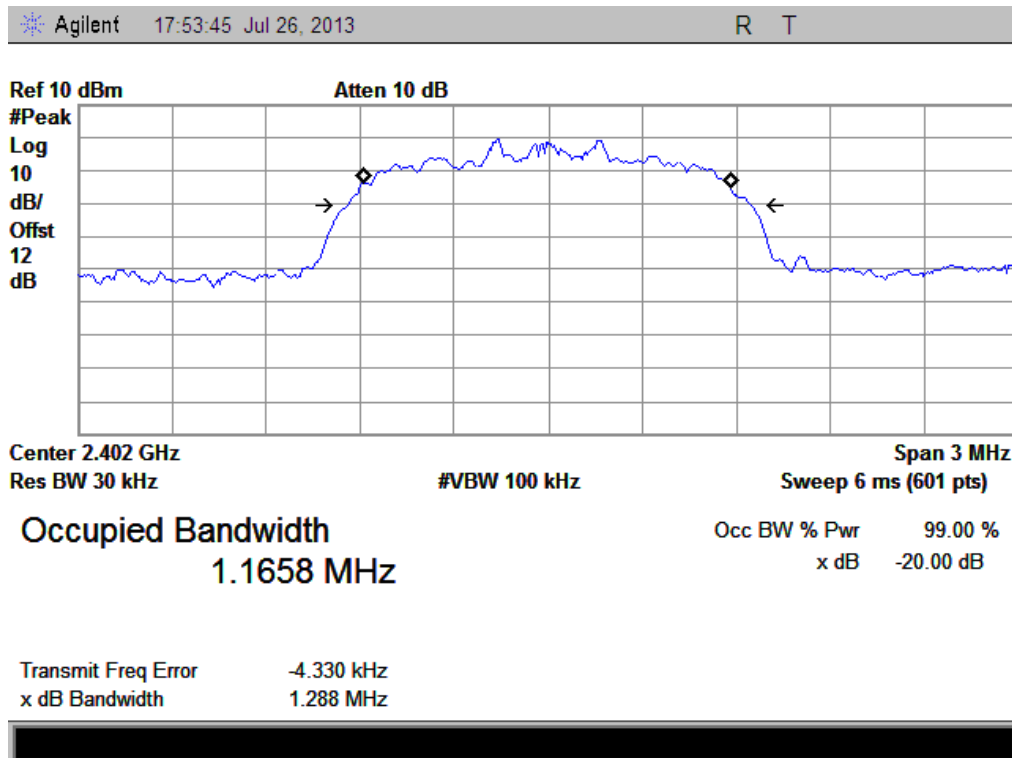

(Plot D: Channel = 2402 @  $\pi/4$ -DQPSK)

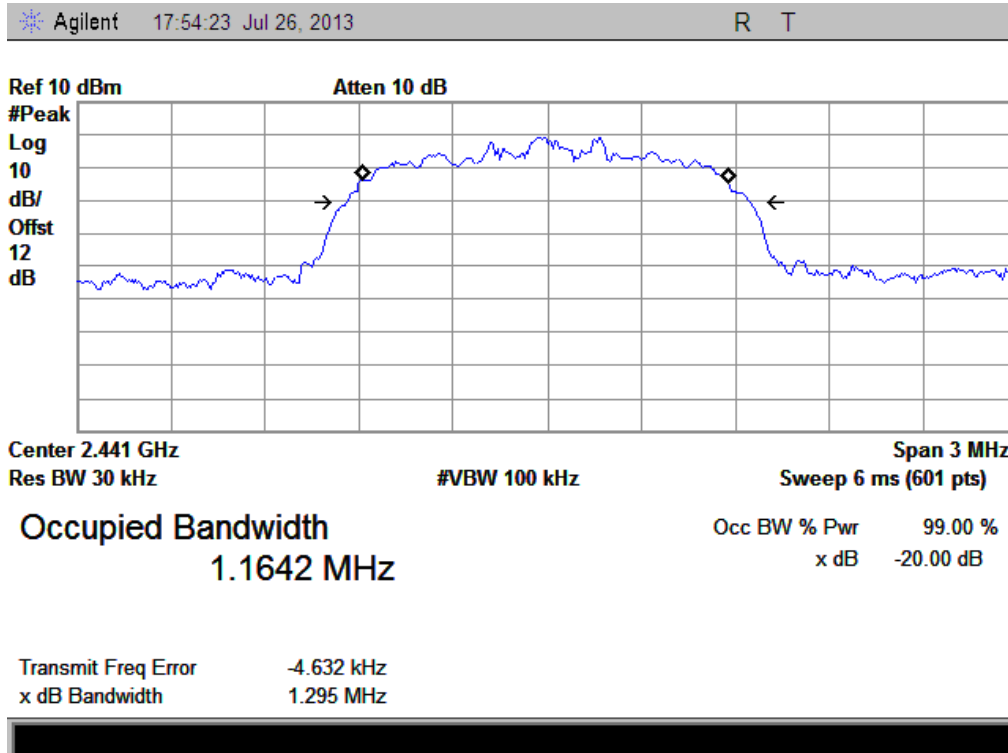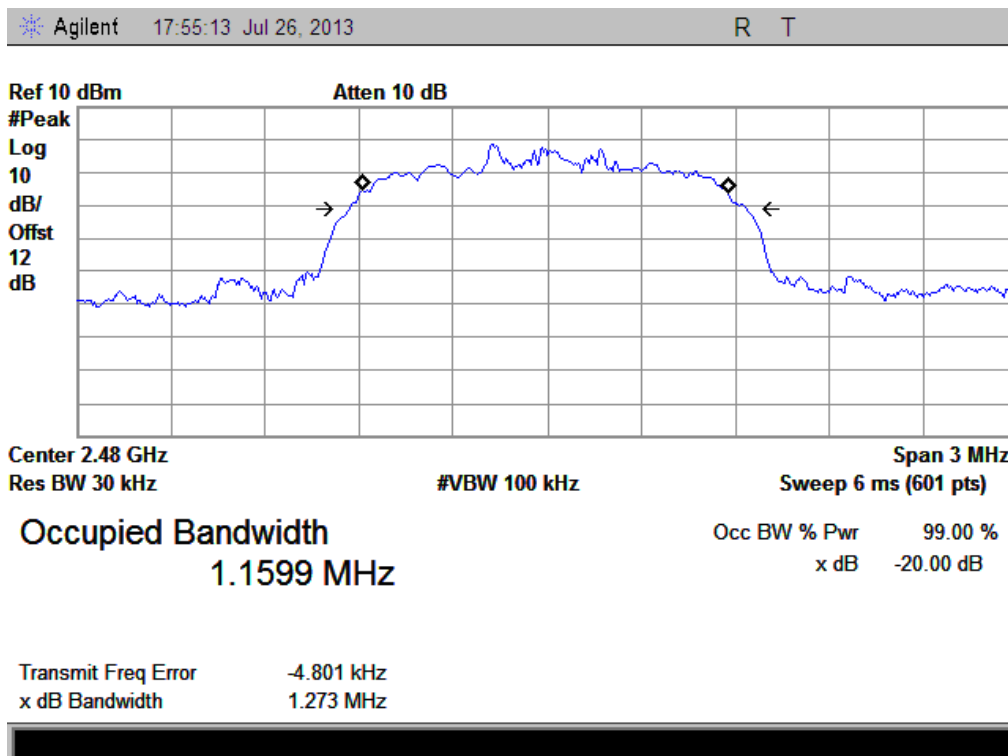


(Plot E: Channel = 2441 @  $\pi/4$ -DQPSK)

(Plot F: Channel = 2480 @  $\pi/4$ -DQPSK)


### 2.4.2.3. 8-DPSK Mode

#### A. Test Verdict:


The maximum 20dB bandwidth measured is 1.2860MHz according to the table below.

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Refer to Plot |
|---------|-----------------|----------------------|---------------|
| 0       | 2402            | 1.2810               | Plot G        |
| 39      | 2441            | 1.2860               | Plot H        |
| 78      | 2480            | 1.2760               | Plot I        |


#### B. Test Plots:

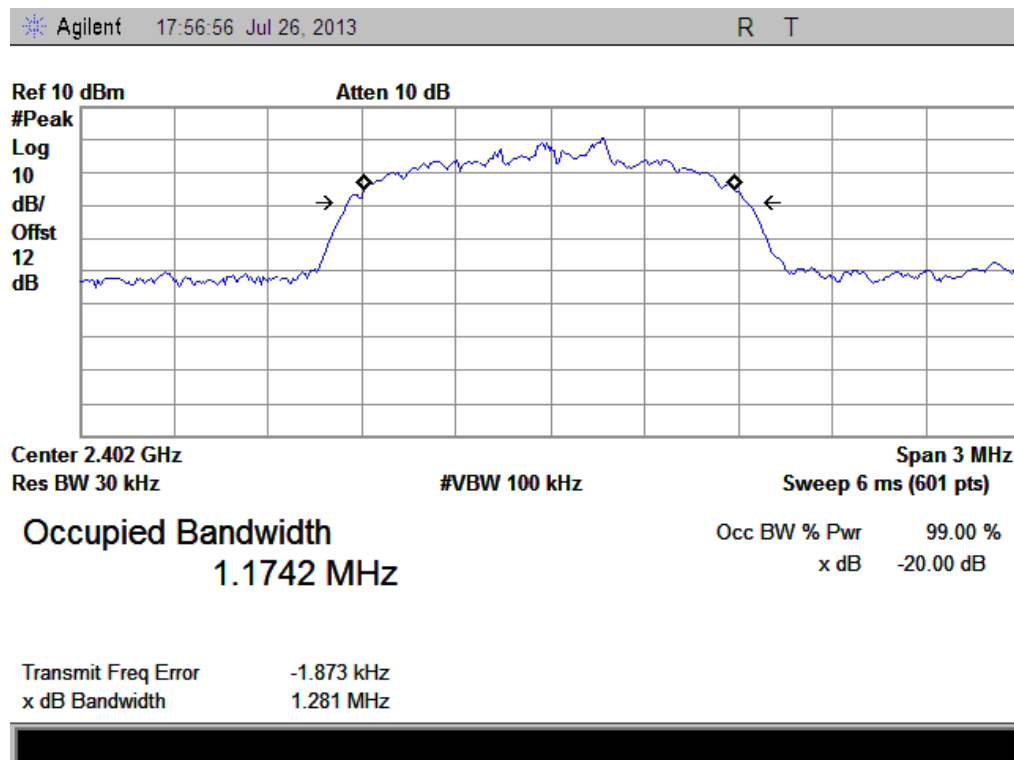

(Plot G: Channel = 2402 @ 8-DPSK)

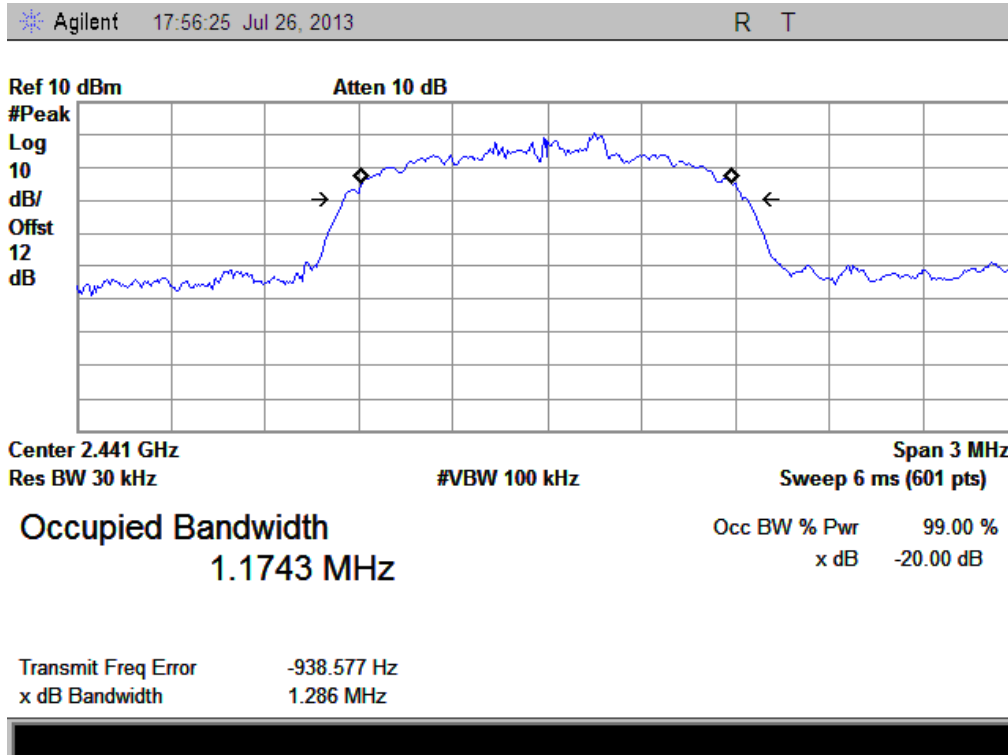

(Plot H: Channel = 2441 @ 8-DPSK)

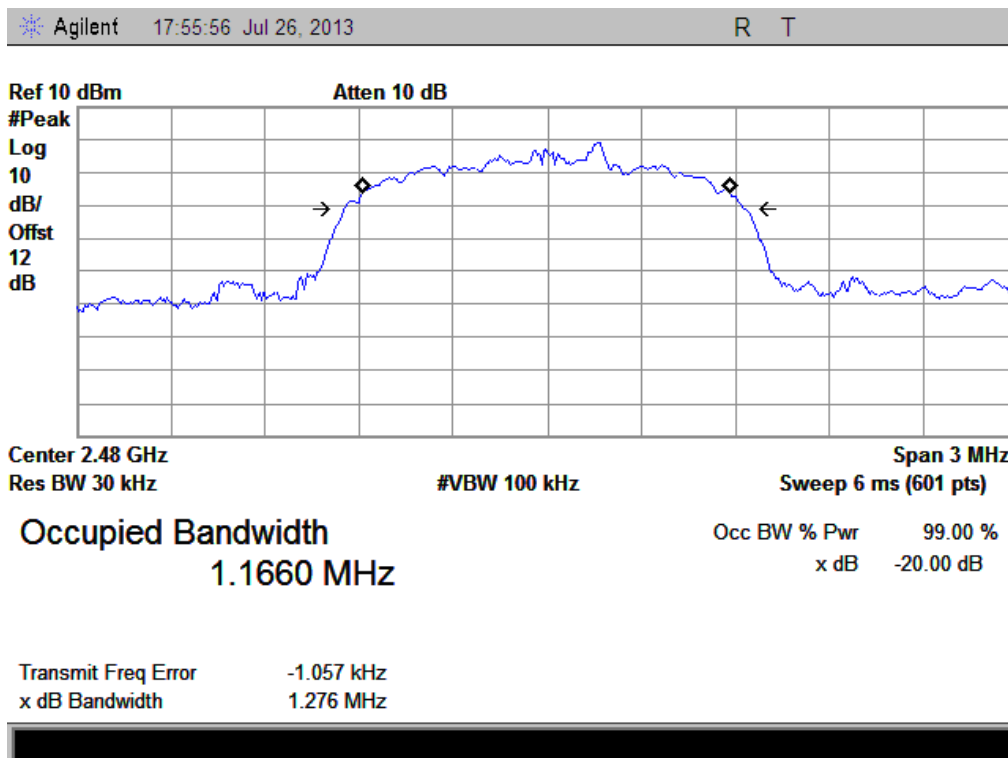

(Plot I: Channel = 2480 @ 8-DPSK)


## 2.5. Carried Frequency Separation

### 2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 2.5.2. Test Description

#### A. Test Setup:

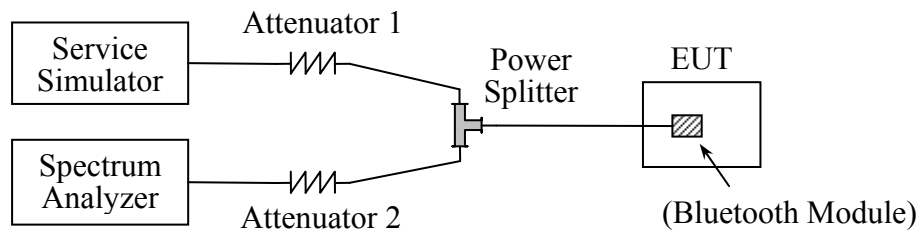

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

| Description       | Manufacturer | Model   | Serial No. | Cal. Date  | Cal. Due   |
|-------------------|--------------|---------|------------|------------|------------|
| System Simulator  | Anritsu      | MT8852B | 6K00006210 | 2013.05.12 | 2014.05.11 |
| Spectrum Analyzer | Agilent      | E7405A  | US44210471 | 2013.05.12 | 2014.05.11 |
| Power Splitter    | Weinschel    | 1506A   | NW521      | 2013.05.12 | 2014.05.11 |
| Attenuator 1      | Resnet       | 10dB    | (n.a.)     | 2013.05.12 | 2014.05.11 |
| Attenuator 2      | Resnet       | 3dB     | (n.a.)     | 2013.05.12 | 2014.05.11 |

### 2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



#### 2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (0.9622MHz for GFSK mode, 1.2950MHz for  $\pi/4$ -DQPSK mode and 1.2860MHz for 8-DPSK mode, refer to section 2.4.1), whichever is greater. So, the verdict is PASSING

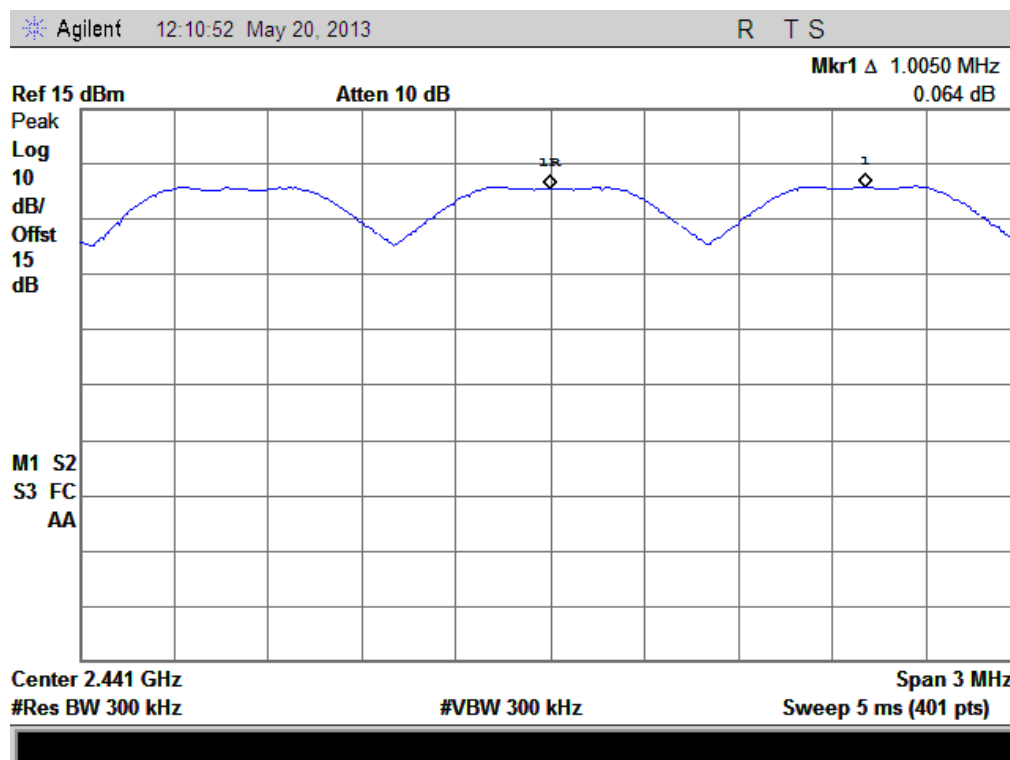

(Plot A: GFSK)

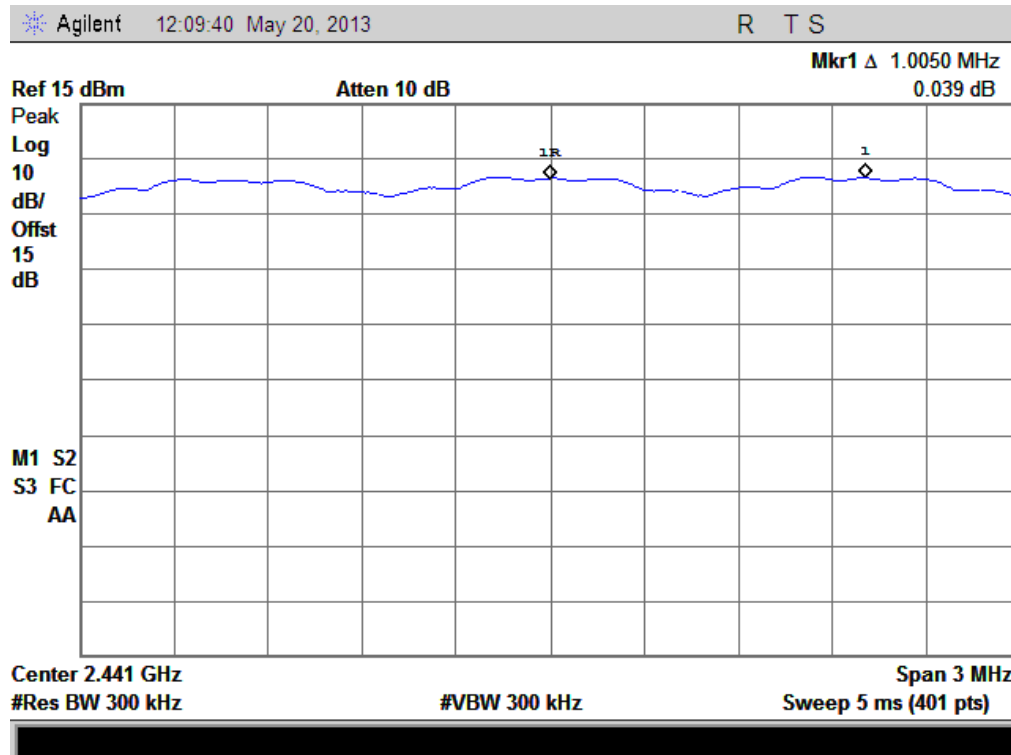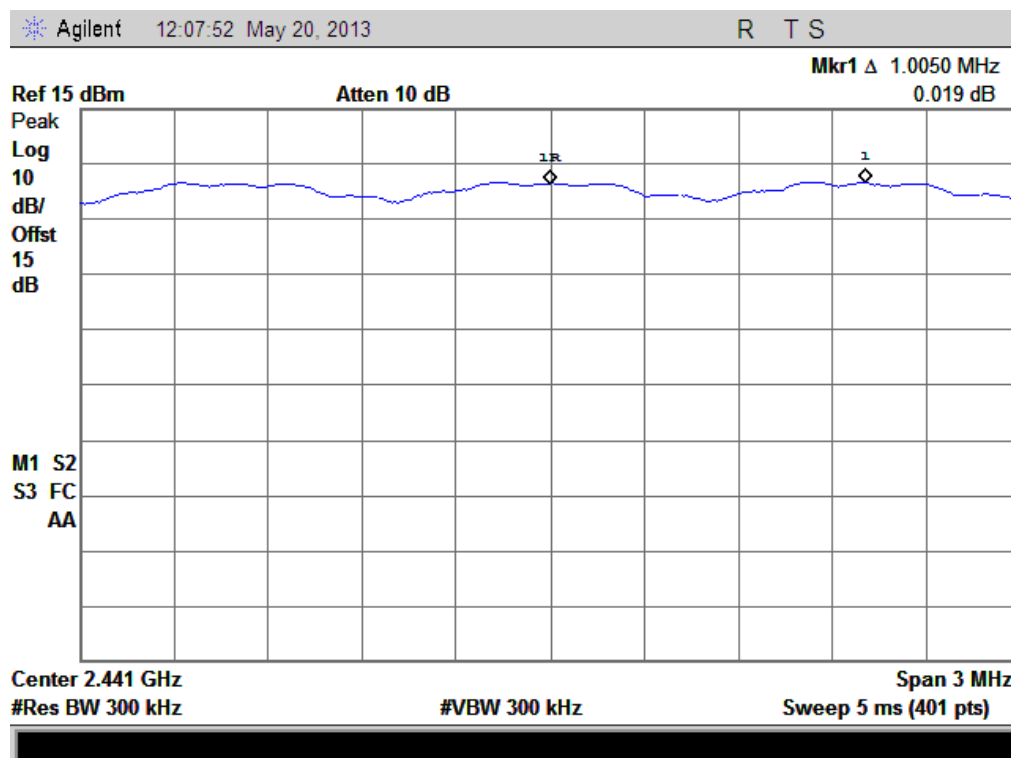
(Plot B:  $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)


## 2.6. Time of Occupancy (Dwell time)

### 2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 2.6.2. Test Description

#### A. Test Setup:

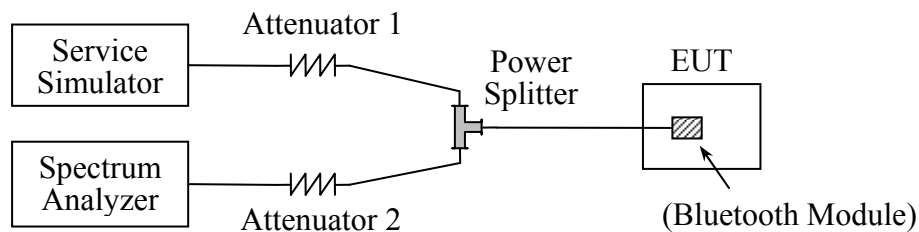

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

| Description       | Manufacturer | Model   | Serial No. | Cal. Date  | Cal. Due   |
|-------------------|--------------|---------|------------|------------|------------|
| System Simulator  | Anritsu      | MT8852B | 6K00006210 | 2013.05.12 | 2014.05.11 |
| Spectrum Analyzer | Agilent      | E7405A  | US44210471 | 2013.05.12 | 2014.05.11 |
| Power Splitter    | Weinschel    | 1506A   | NW521      | 2013.05.12 | 2014.05.11 |
| Attenuator 1      | Resnet       | 10dB    | (n.a.)     | 2013.05.12 | 2014.05.11 |
| Attenuator 2      | Resnet       | 3dB     | (n.a.)     | 2013.05.12 | 2014.05.11 |

### 2.6.3. Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channel \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .

## 2.6.4. Test Result


### A. Test Verdict:

| DH Packet | Pulse Width (msec) | Number of pulse in 3.16 seconds | Refer to Plot | Average Time of Occupancy (sec) | Limit (sec) | Verdict |
|-----------|--------------------|---------------------------------|---------------|---------------------------------|-------------|---------|
| 1DH5      | 2.887              | 11                              | Plot A        | 0.318                           | 0.4         | PASS    |
| 2DH5      | 2.888              | 9                               | Plot B        | 0.260                           |             | PASS    |
| 3DH5      | 2.888              | 11                              | Plot C        | 0.318                           |             | PASS    |


### B. Test Plots:

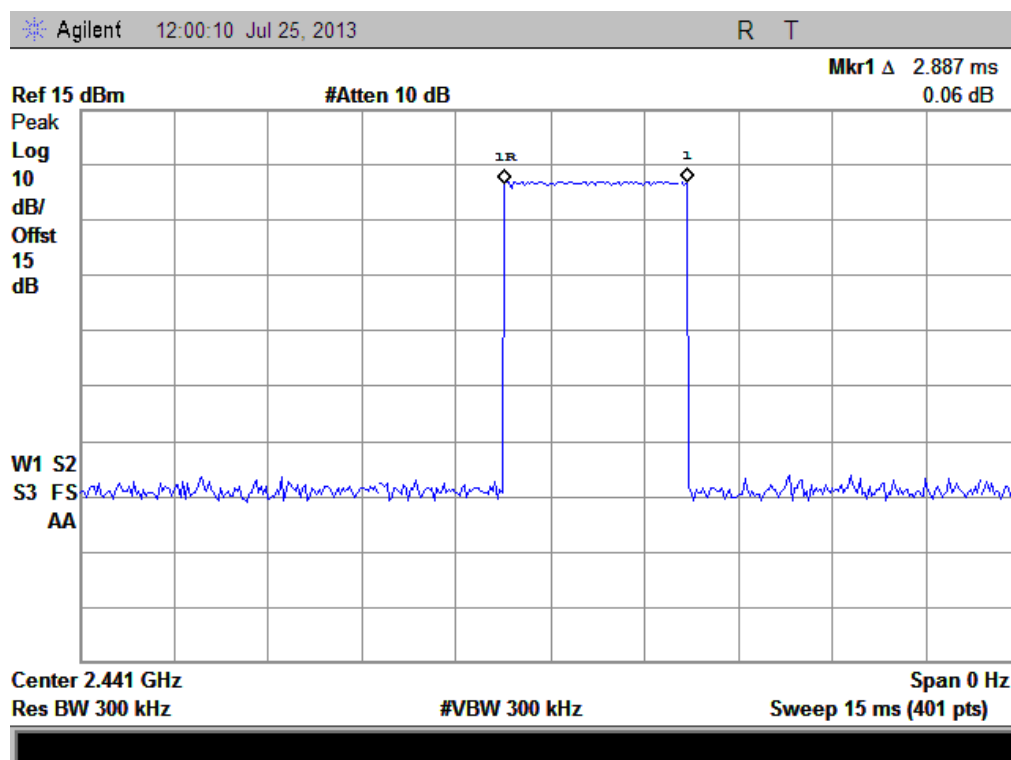




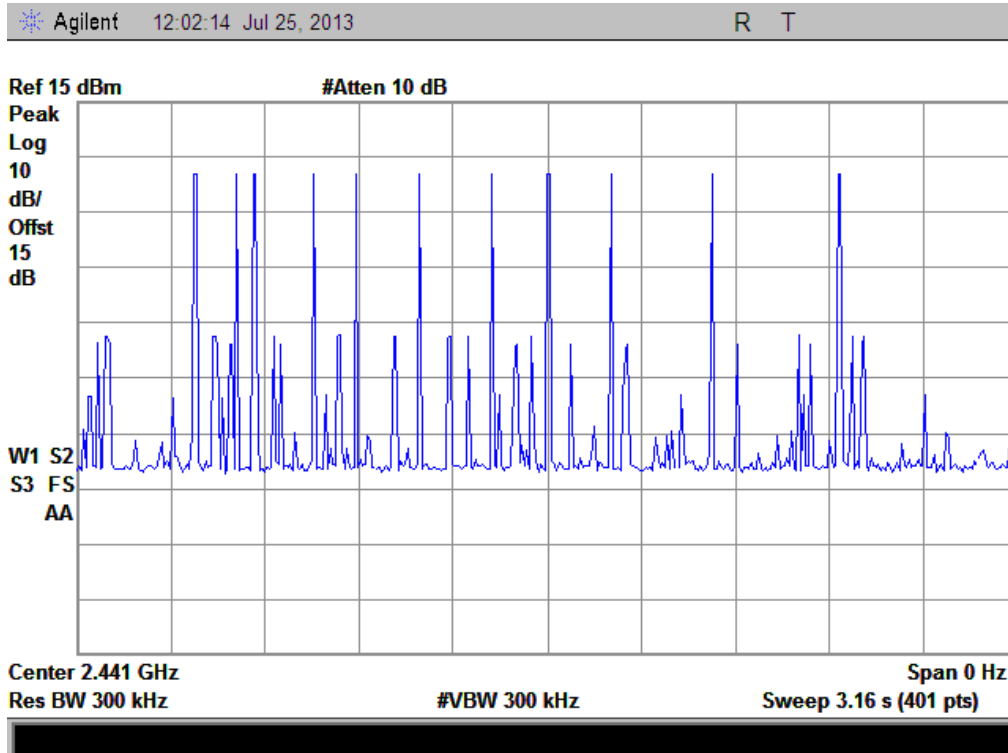



(Plot A: 1DH5 @ GFSK)

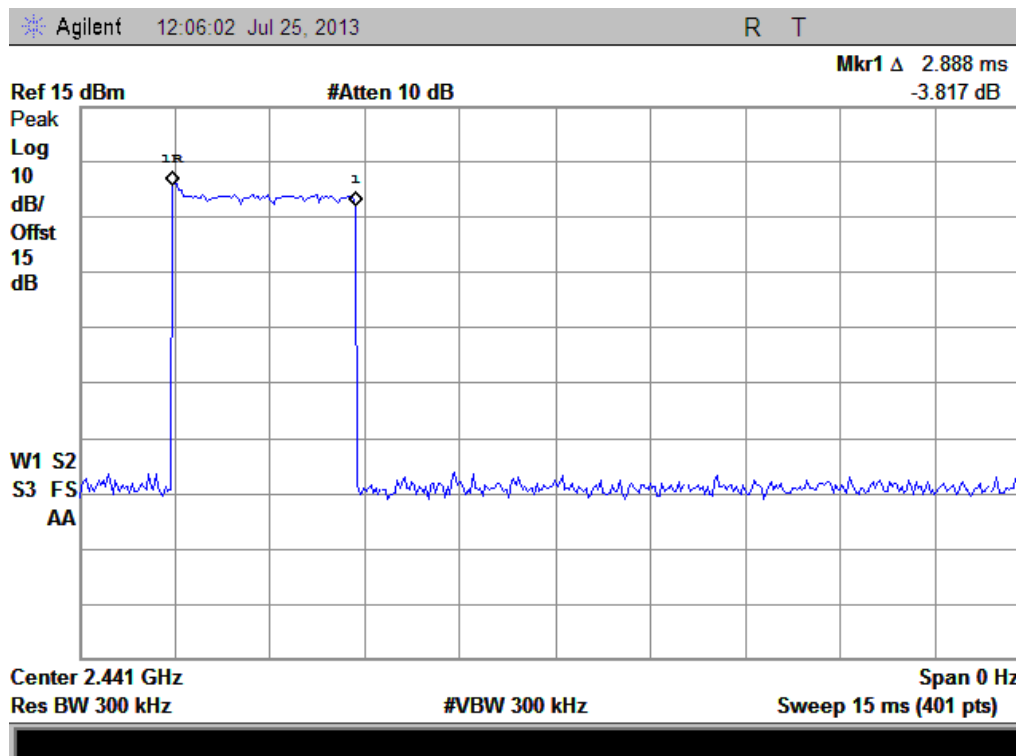

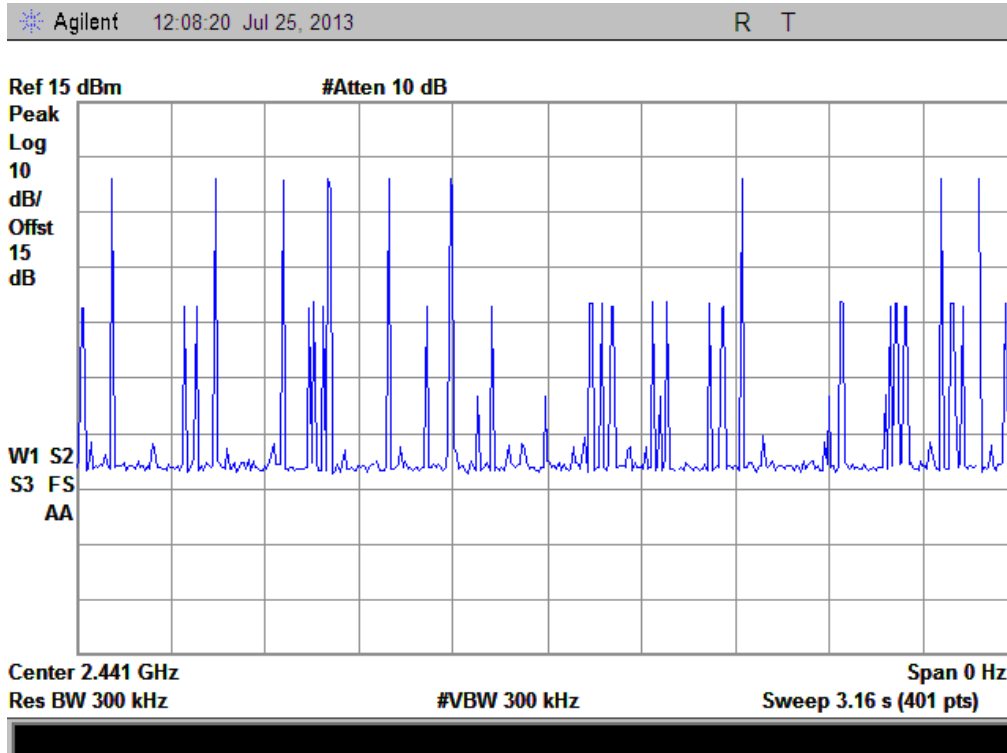

(Plot B: 2DH5 @  $\pi/4$ -DQPSK)

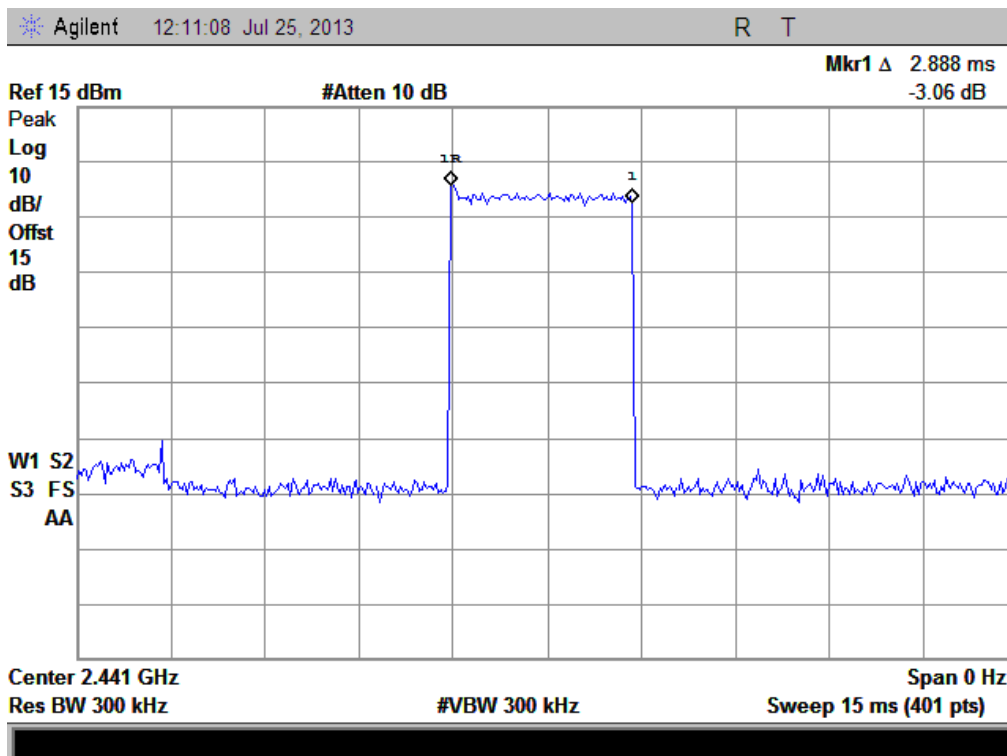

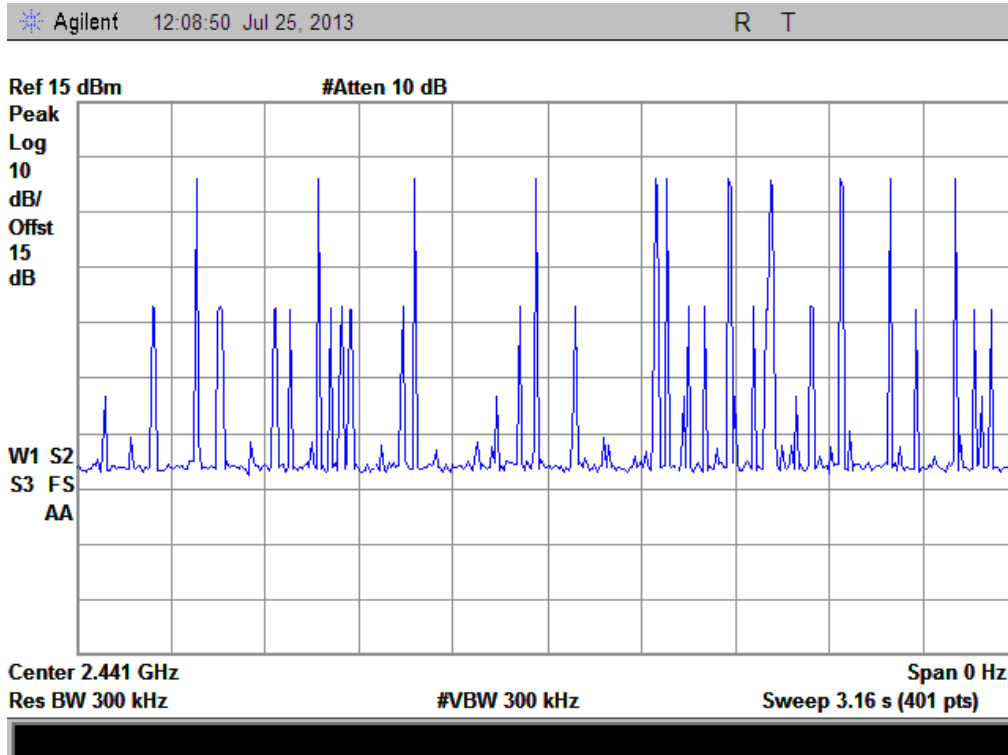

(Plot C: 3DH5 @ 8-DPSK)


## 2.7. Conducted Spurious Emissions and Band Edge

### 2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.7.2. Test Description

#### A. Test Setup:

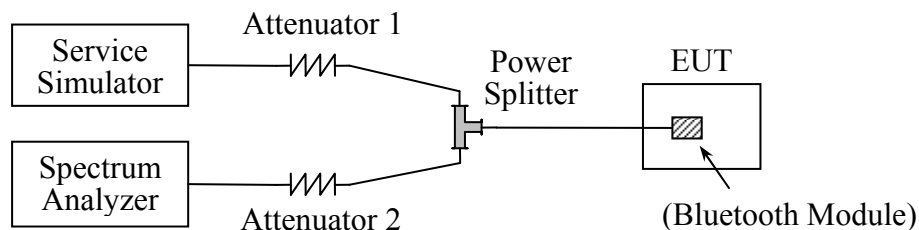

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

| Description       | Manufacturer | Model   | Serial No. | Cal. Date  | Cal. Due   |
|-------------------|--------------|---------|------------|------------|------------|
| System Simulator  | Anritsu      | MT8852B | 6K00006210 | 2013.05.12 | 2014.05.11 |
| Spectrum Analyzer | Agilent      | E7405A  | US44210471 | 2013.05.12 | 2014.05.11 |
| Power Splitter    | Weinschel    | 1506A   | NW521      | 2013.05.12 | 2014.05.11 |
| Attenuator 1      | Resnet       | 10dB    | (n.a.)     | 2013.05.12 | 2014.05.11 |
| Attenuator 2      | Resnet       | 3dB     | (n.a.)     | 2013.05.12 | 2014.05.11 |

### 2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

## 2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10<sup>th</sup> harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


### 2.7.4.1. GFSK Mode

#### A. Test Verdict:


| Channel | Frequency (MHz) | Measured Max. Out of Band Emission dBm) | Refer to Plot | Limit (dBm)   |                         | Verdict |
|---------|-----------------|-----------------------------------------|---------------|---------------|-------------------------|---------|
|         |                 |                                         |               | Carrier Level | Calculated -20dBc Limit |         |
| 0       | 2402            | -44.21                                  | Plot A.1      | 2.116         | -17.9                   | PASS    |
| 39      | 2441            | -42.57                                  | Plot B.1      | -0.139        | -20.1                   | PASS    |
| 78      | 2480            | -44.82                                  | Plot C.1      | 0.540         | -19.5                   | PASS    |

#### B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

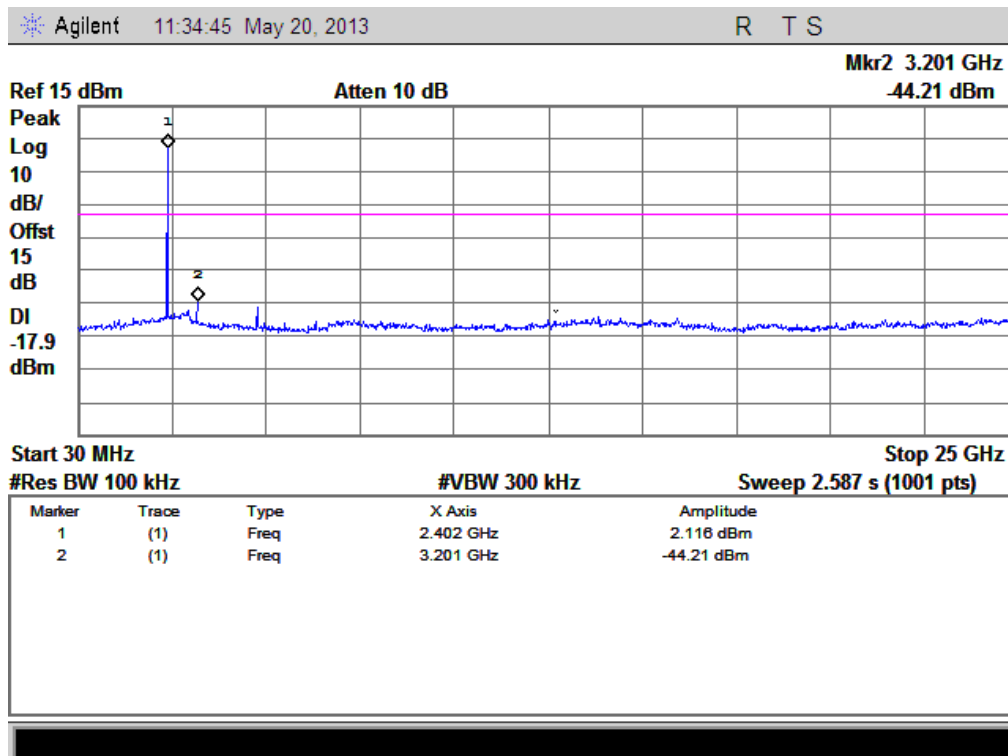


(Plot A.1: Channel = 0, 30MHz to 25GHz @ GFSK Mode)

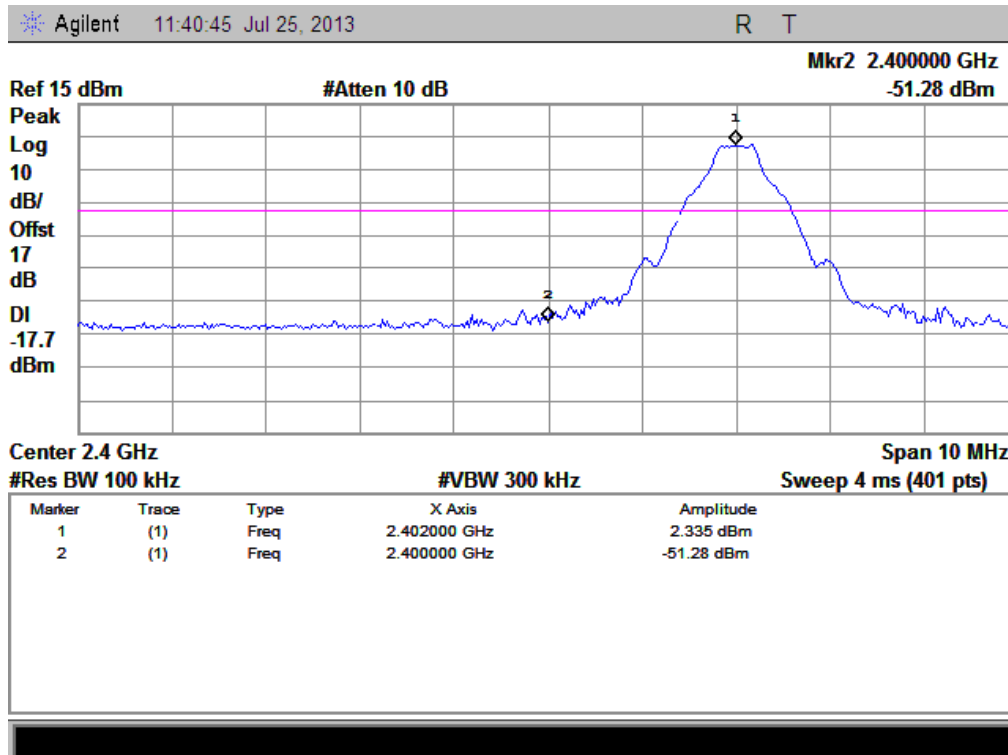


(Channel = 0, Band Edge with hopping off @ GFSK Mode)

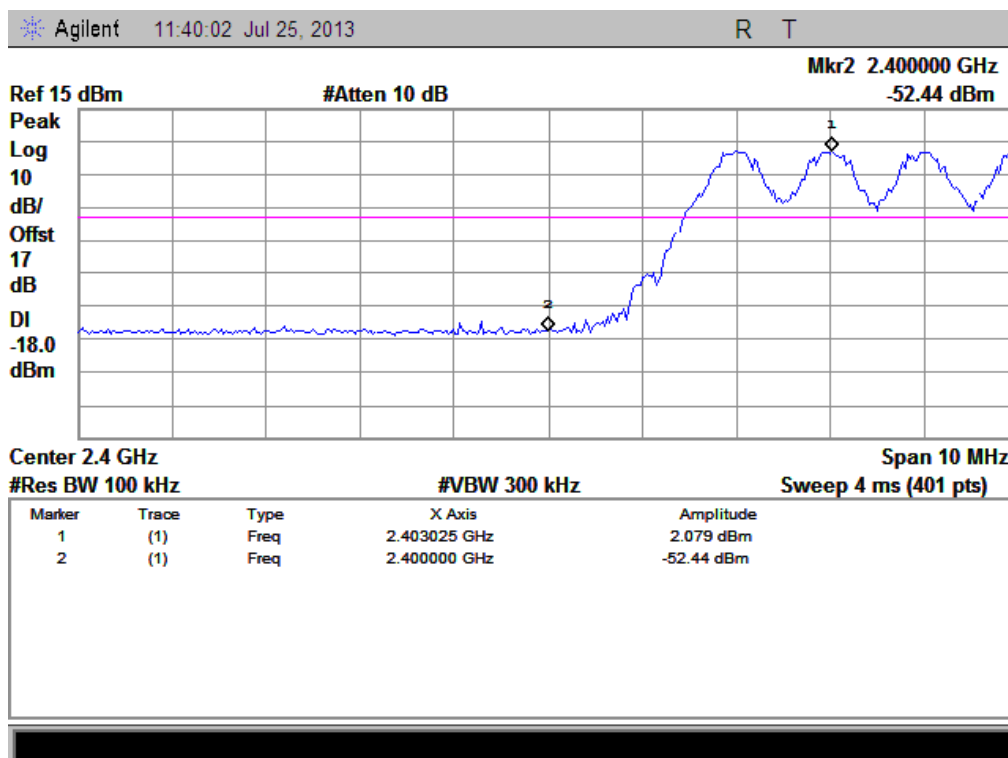


(Channel = 0, Band Edge with hopping on @ GFSK Mode)

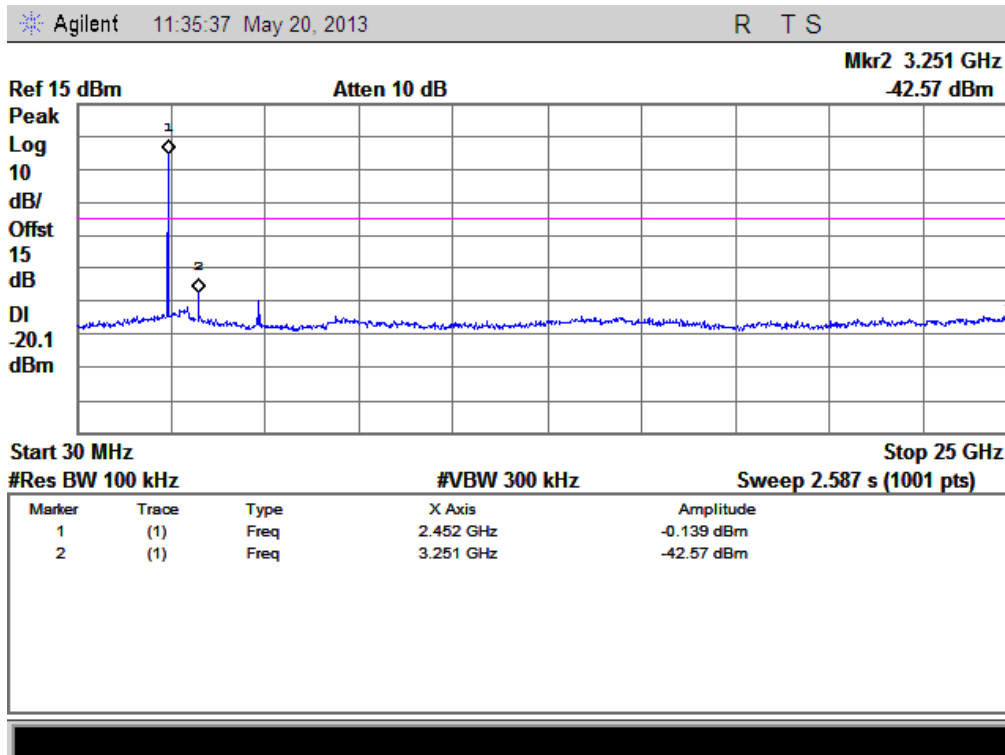


(Plot B.1: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

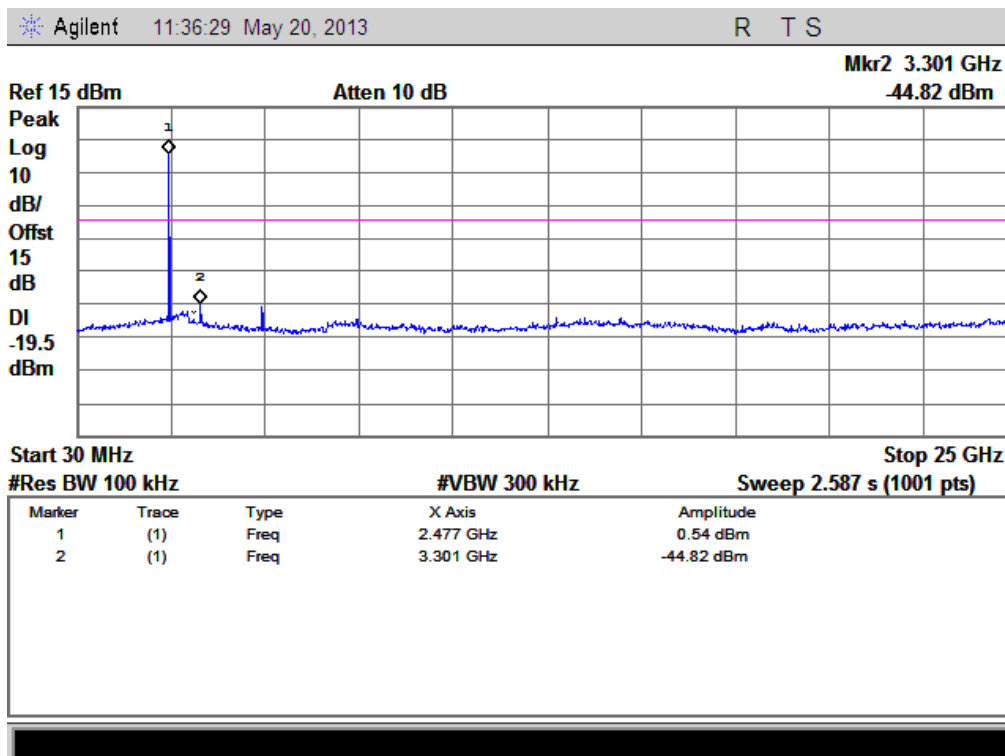

(Plot C.1: Channel = 78, 30MHz to 25GHz @ GFSK Mode)

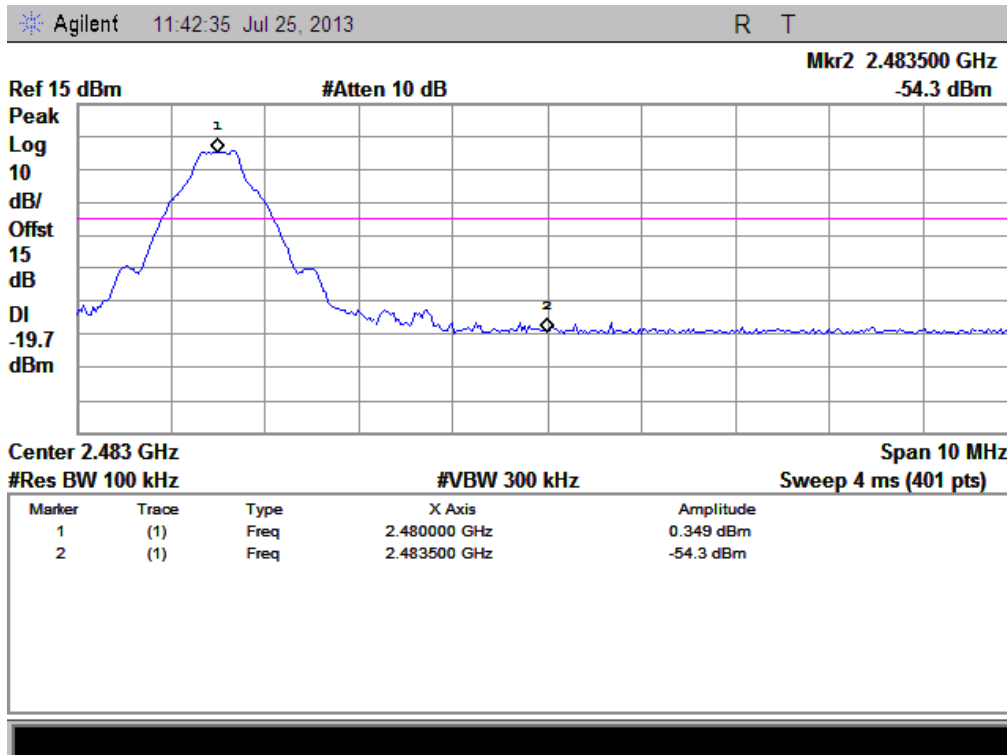

(Channel = 78, Band Edge with hopping off @ GFSK Mode)

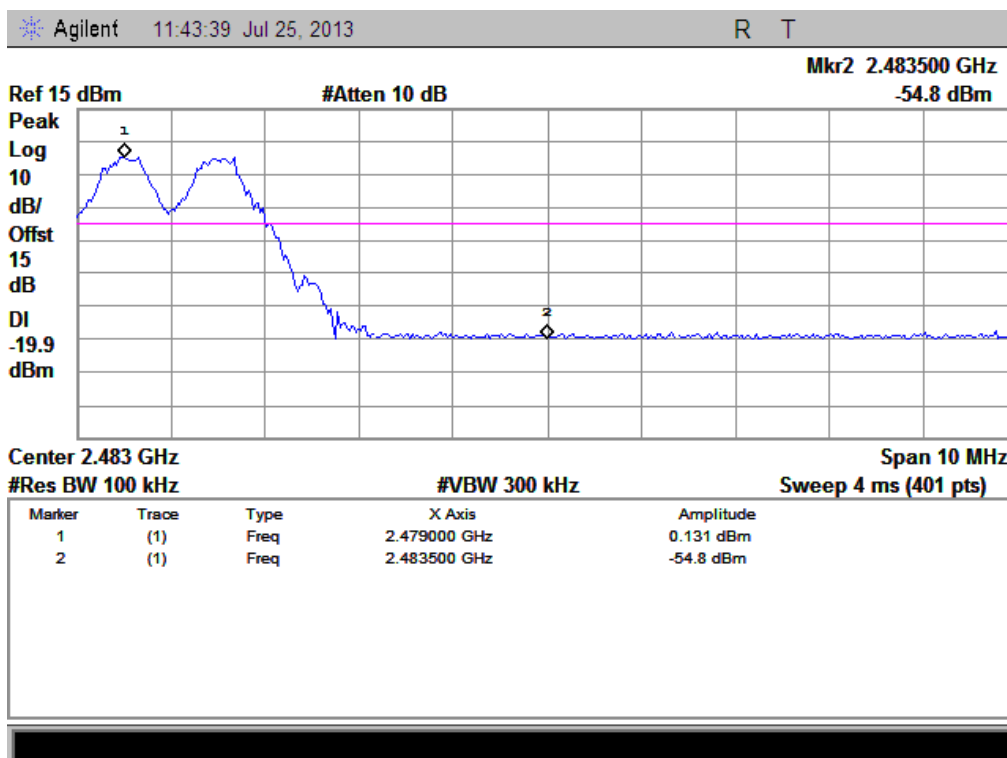

(Channel = 78, Band Edge with hopping on @ GFSK Mode)




## 2.7.4.2. $\pi/4$ -DQPSK Mode

### A. Test Verdict:


| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Refer to Plot | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|---------------|-------------------------|---------|
|         |                 |                                          |               | Carrier Level | Calculated -20dBc Limit |         |
| 0       | 2402            | -47.64                                   | Plot D.1      | 0.783         | -19.2                   | PASS    |
| 39      | 2441            | -47.81                                   | Plot E.1      | -1.386        | -21.4                   | PASS    |
| 78      | 2480            | -46.72                                   | Plot F.1      | -1.613        | -21.6                   | PASS    |

### B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

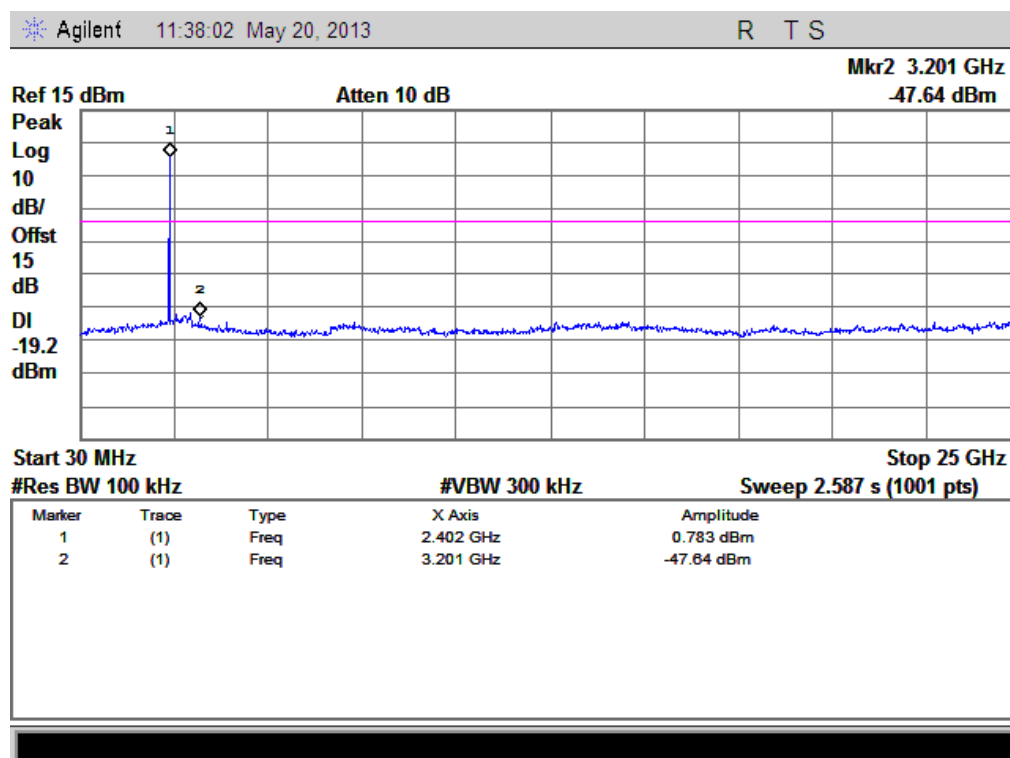


(Plot D.1: Channel = 0, 30MHz to 25GHz @  $\pi/4$ -DQPSK)

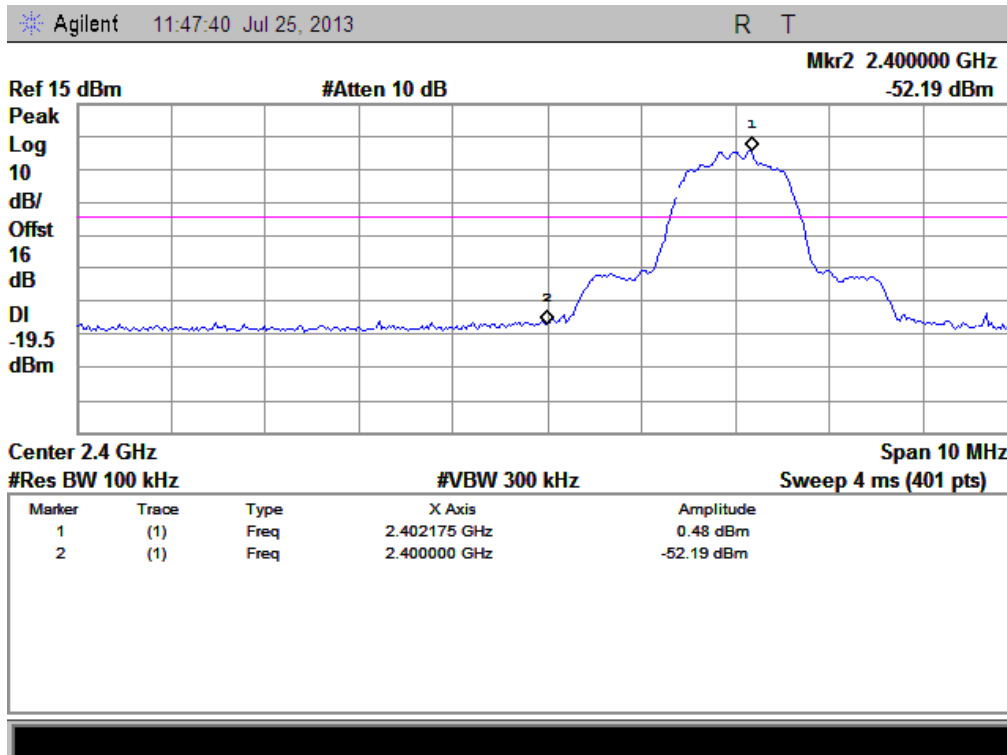


(Channel = 0, Band Edge with hopping off @  $\pi/4$ -DQPSK)

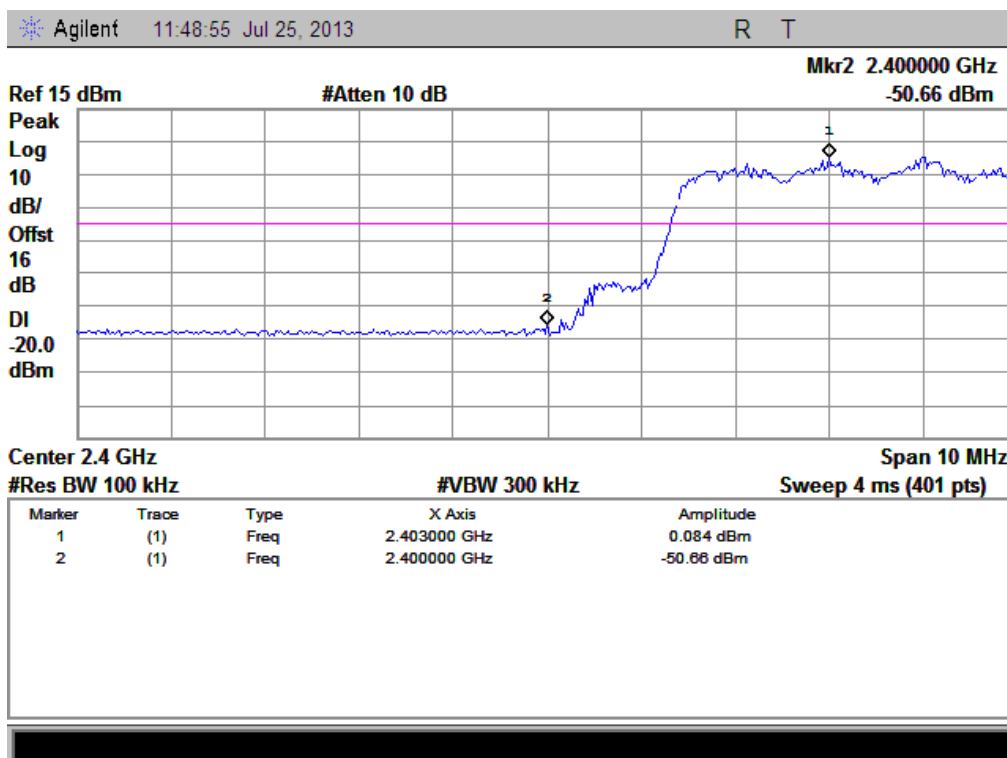


(Channel = 0, Band Edge with hopping on @  $\pi/4$ -DQPSK)

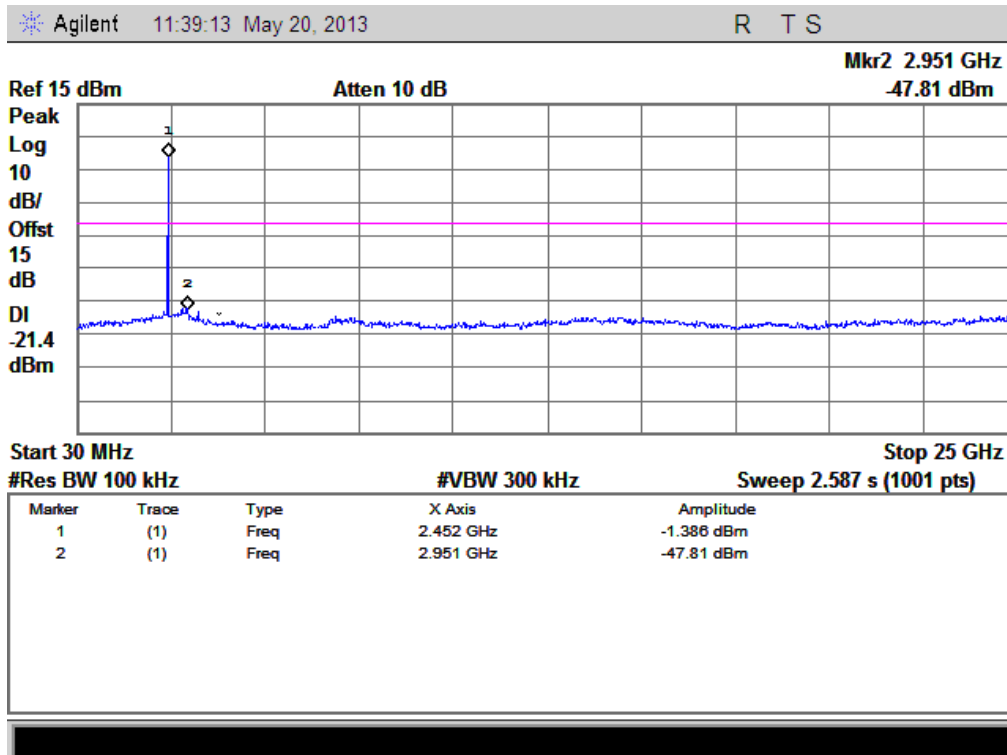


(Plot E.1: Channel = 39, 30MHz to 25GHz @  $\pi/4$ -DQPSK)

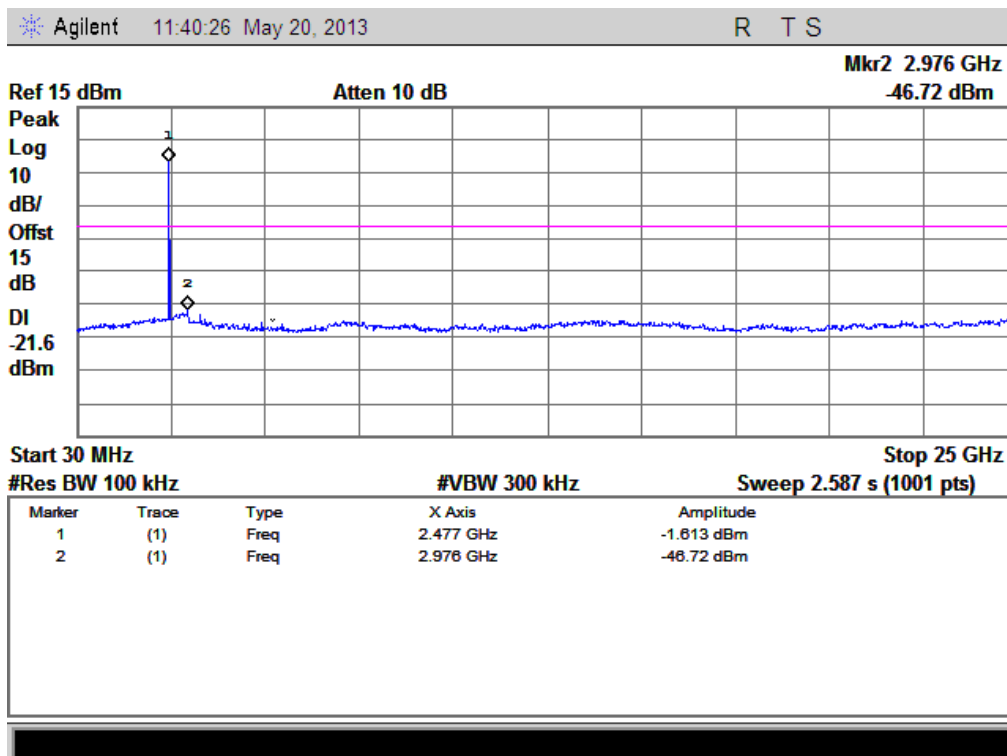

(Plot F.1: Channel = 78, 30MHz to 25GHz @  $\pi/4$ -DQPSK)

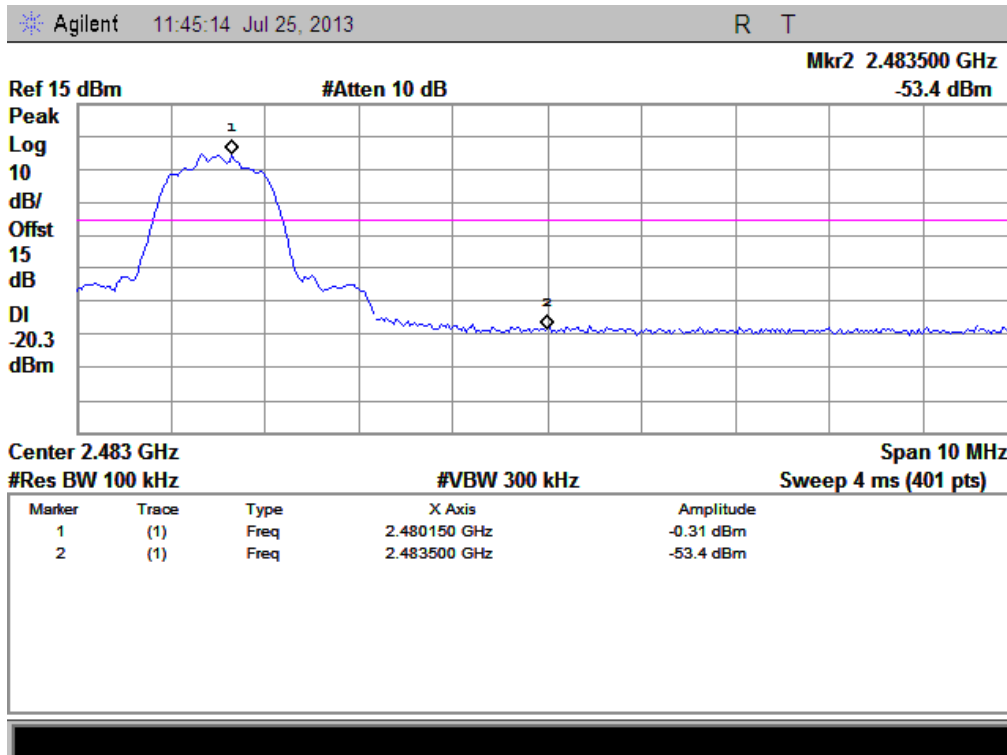

(Channel = 78, Band Edge with hopping off @  $\pi/4$ -DQPSK)

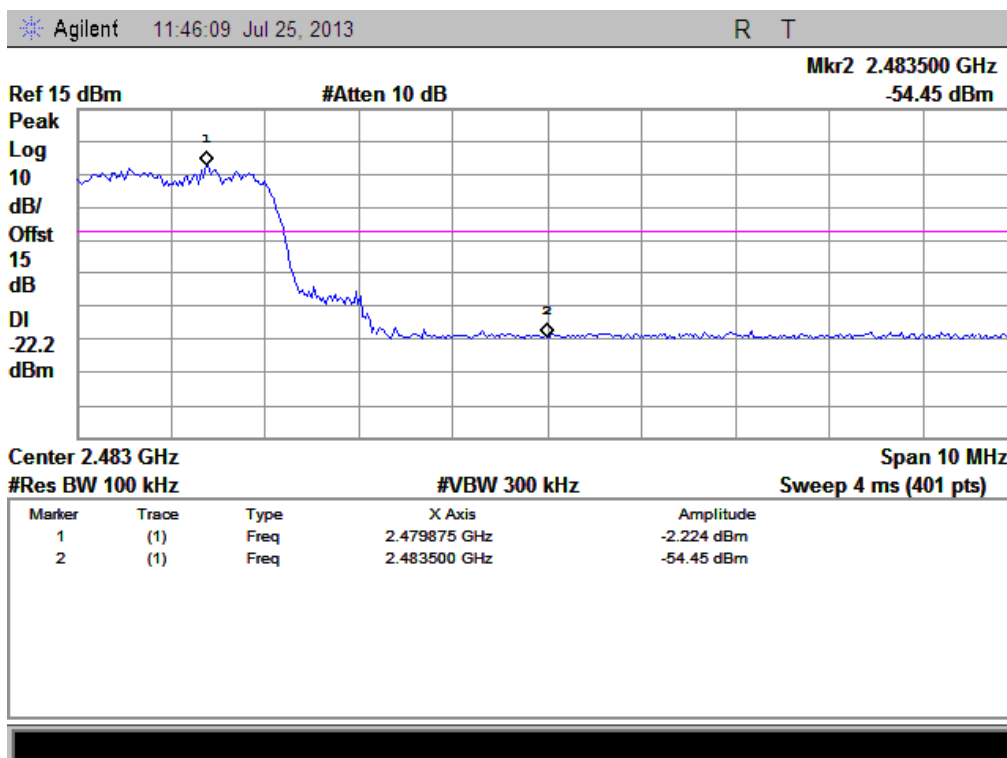

(Channel = 78, Band Edge with hopping on @  $\pi/4$ -DQPSK)


### 2.7.4.3. 8-DPSK Mode

#### A. Test Verdict:


| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Refer to Plot | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|---------------|-------------------------|---------|
|         |                 |                                          |               | Carrier Level | Calculated -20dBc Limit |         |
| 0       | 2402            | -46.45                                   | Plot G.1      | 2.629         | -17.4                   | PASS    |
| 39      | 2441            | -46.73                                   | Plot H.1      | 0.615         | -21.6                   | PASS    |
| 78      | 2480            | -47.30                                   | Plot I.1      | -0.283        | -20.3                   | PASS    |

#### B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

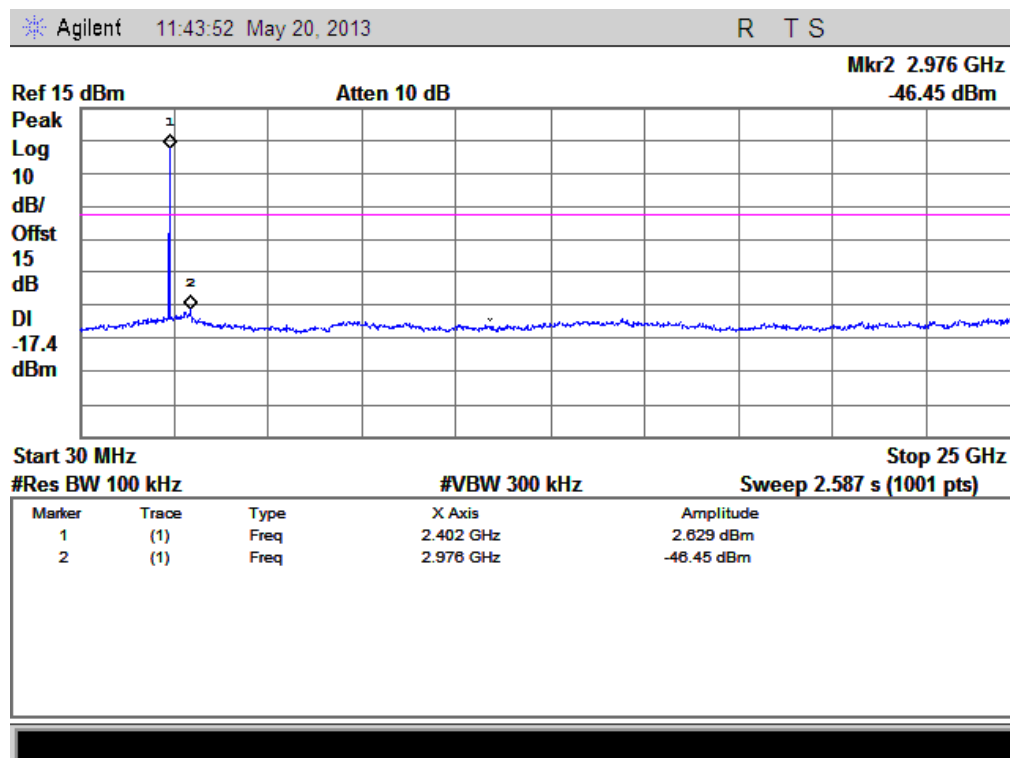


(Plot G.1: Channel = 0, 30MHz to 25GHz @ 8-DPSK)

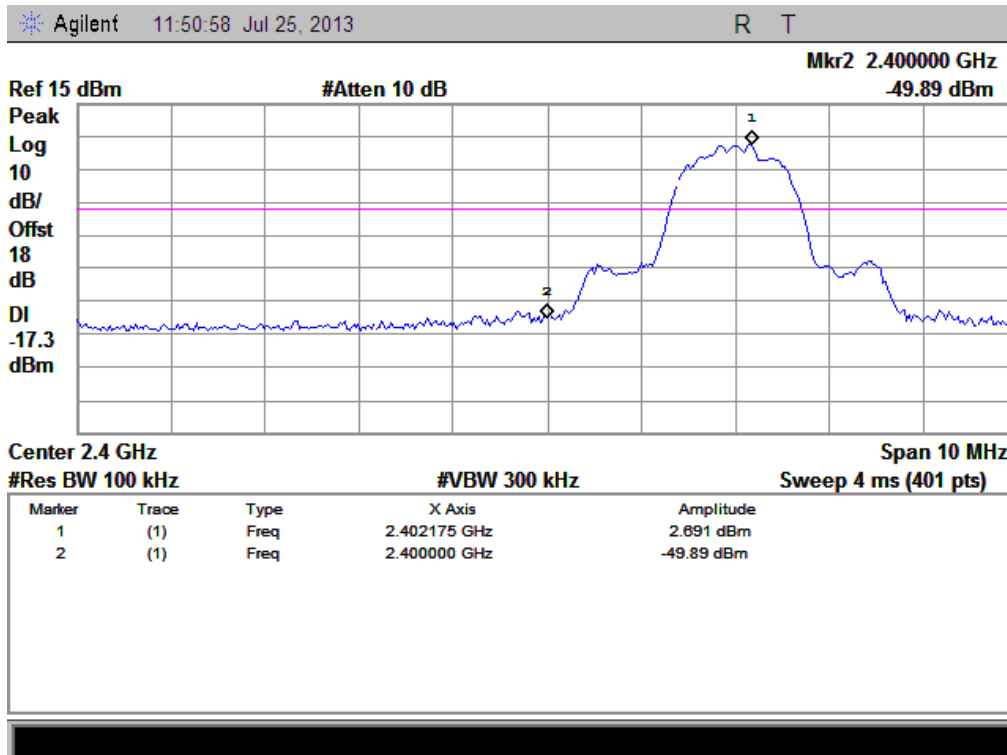


(Channel = 0, Band Edge with hopping off @ 8-DPSK)

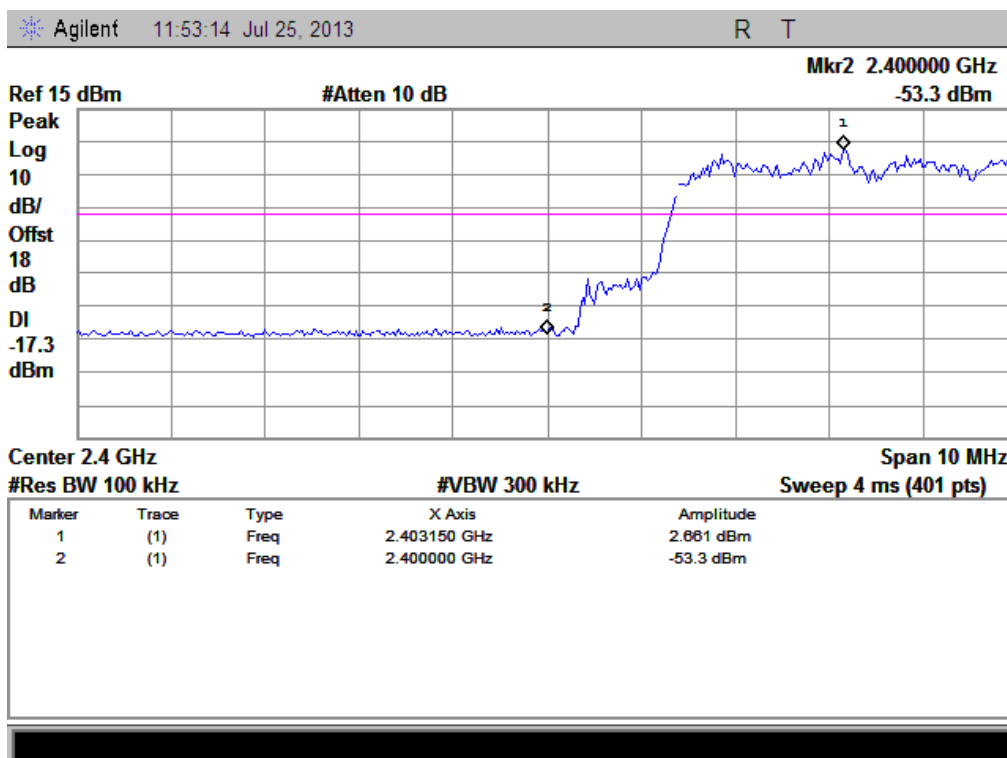


(Channel = 0, Band Edge with hopping on @ 8-DPSK)

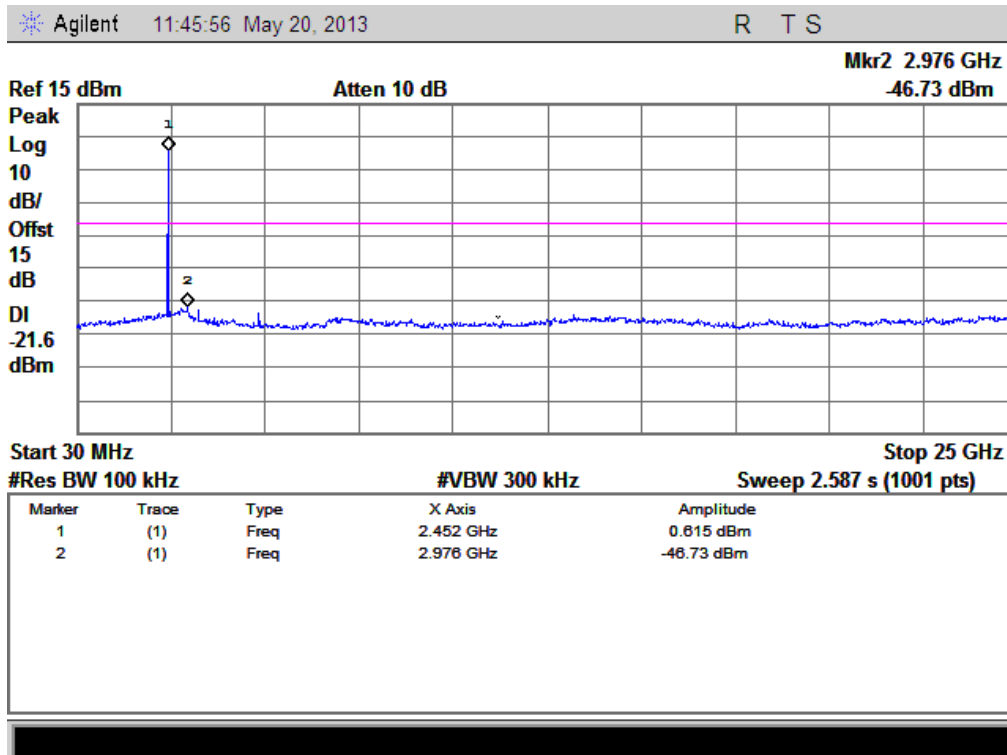


(Plot H.1: Channel = 39, 30MHz to 25GHz @ 8-DPSK)

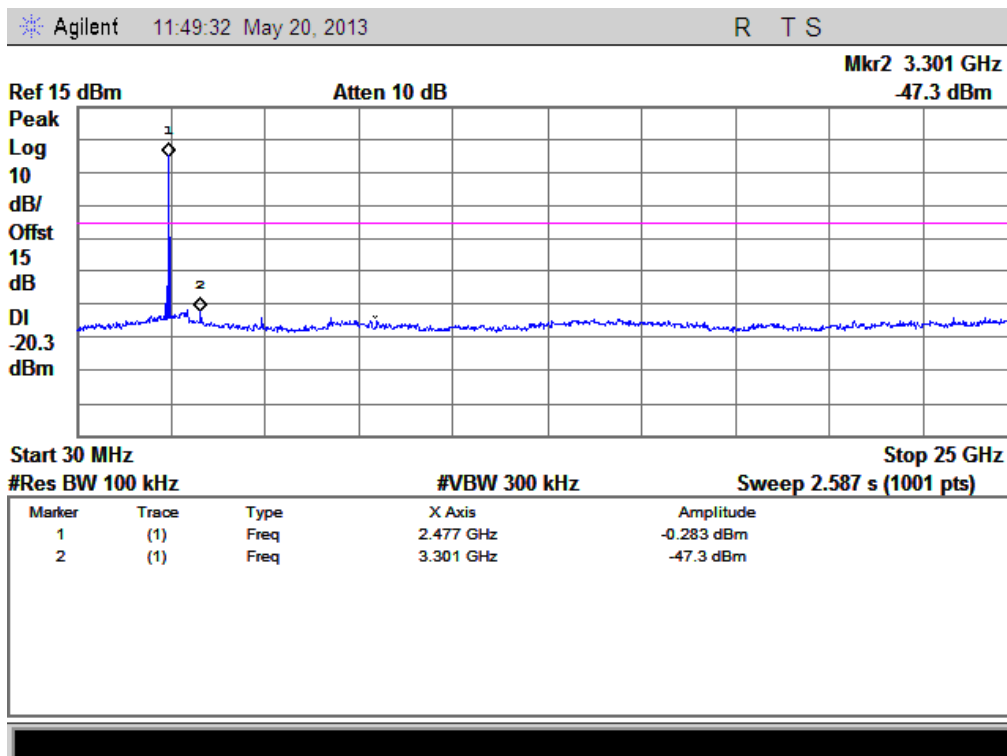

(Plot I.1: Channel = 78, 30MHz to 25GHz @ 8-DPSK)

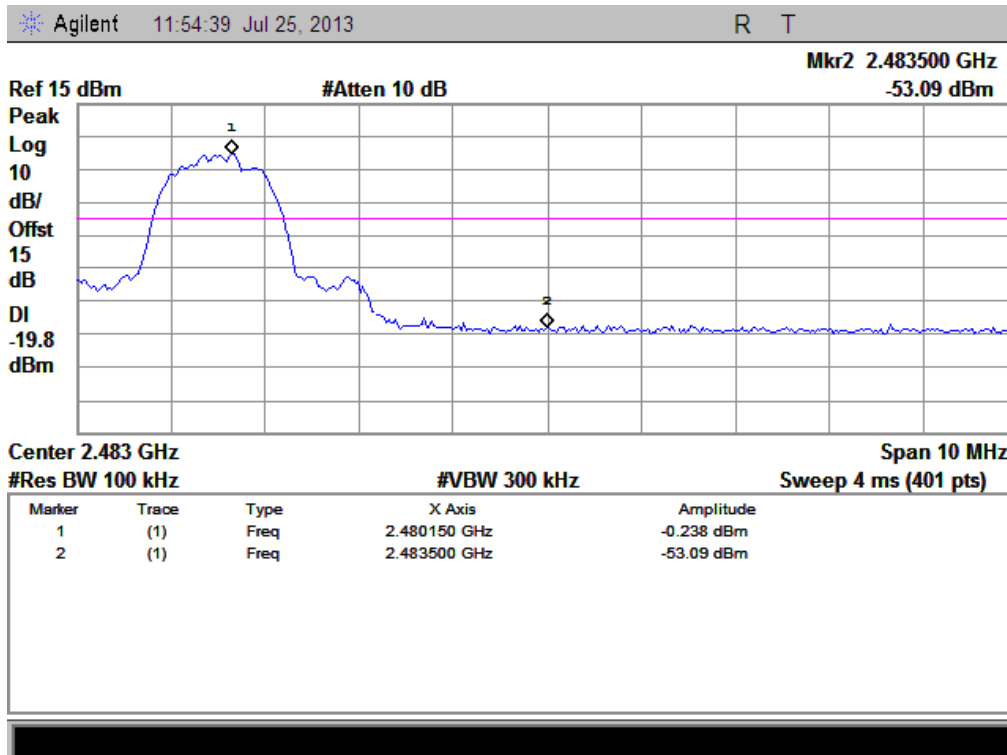

(Channel = 78, Band Edge with hopping on @ 8-DPSK)

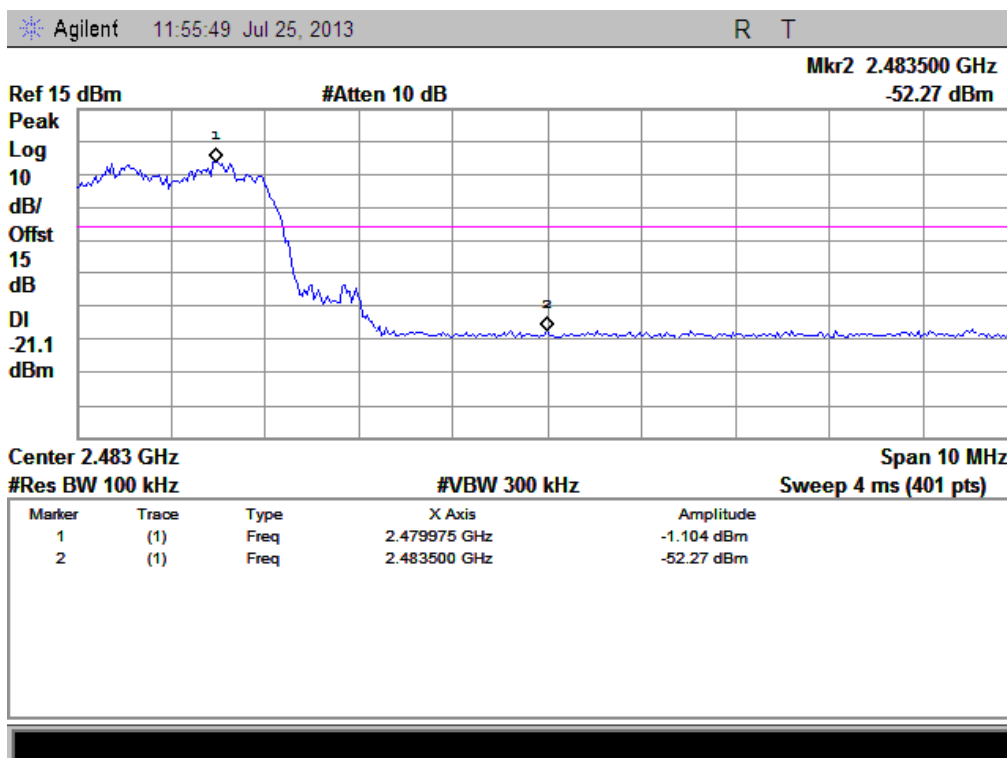

(Channel = 78, Band Edge with hopping on @ 8-DPSK)




## 2.8. Restricted Frequency Bands

### 2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.8.2. Test Description

#### A. Test Setup:

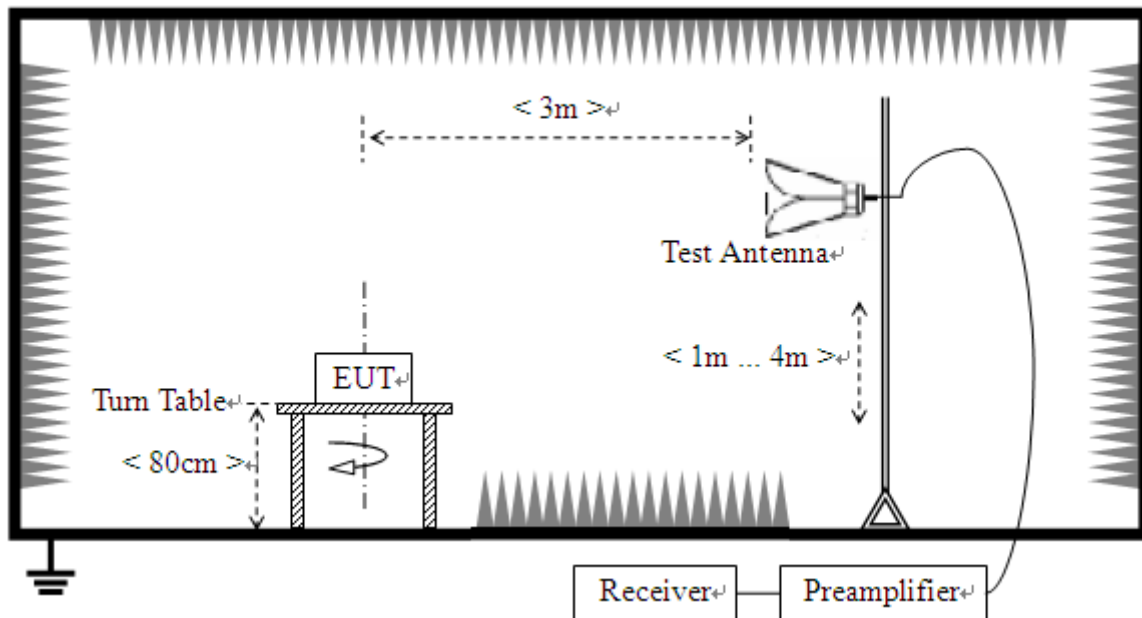

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

#### B. Equipments List:

| Description      | Manufacturer | Model  | Serial No. | Cal. Date  | Cal. Due   |
|------------------|--------------|--------|------------|------------|------------|
| System Simulator | R&S          | CMU200 | 100448     | 2013.05.12 | 2014.05.11 |

| Description           | Manufacturer | Model      | Serial No. | Cal. Date  | Cal. Due   |
|-----------------------|--------------|------------|------------|------------|------------|
| Receiver              | Agilent      | E7405A     | US44210471 | 2013.05.12 | 2014.05.11 |
| Full-Anechoic Chamber | Albatross    | 9m*6m*6m   | (n.a.)     | 2012.05.12 | 2014.05.11 |
| Test Antenna - Horn   | Schwarzbeck  | BBHA 9120D | 9120D-963  | 2013.05.12 | 2014.05.11 |

### 2.8.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 KHz for  $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

### 2.8.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB } \mu \text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

Note: restricted frequency bands tests were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


#### 2.8.4.1. GFSK Mode

##### A. Test Verdict:


| Channel | Frequency (MHz) | Detector | Receiver Reading UR (dBuV) | AT (dB) | AFactor (dB@3m) | Max. Emission E (dBμV/m) | Limit (dBμV/m) | Verdict |
|---------|-----------------|----------|----------------------------|---------|-----------------|--------------------------|----------------|---------|
|         |                 | PK/ AV   |                            |         |                 |                          |                |         |
| 0       | 2370.98         | PK       | 47.31                      | -30.93  | 32.56           | 48.94                    | 74             | Pass    |
| 0       | 2346.02         | AV       | 34.35                      | -30.93  | 32.56           | 35.98                    | 54             | Pass    |

| Channel | Frequency<br>(MHz) | Detector | Receiver<br>Reading<br>UR<br>(dBuV) | AT<br>(dB) | AFactor<br>(dB@3m) | Max.<br>Emission<br>E<br>(dBμV/m) | Limit<br>(dBμV/m) | Verdict |
|---------|--------------------|----------|-------------------------------------|------------|--------------------|-----------------------------------|-------------------|---------|
|         |                    | PK/ AV   |                                     |            |                    |                                   |                   |         |
| 78      | 2486.75            | PK       | 46.84                               | -29.05     | 32.50              | 50.29                             | 74                | Pass    |
| 78      | 2483.56            | AV       | 36.73                               | -29.05     | 32.50              | 40.18                             | 54                | Pass    |


## B. Test Plots:

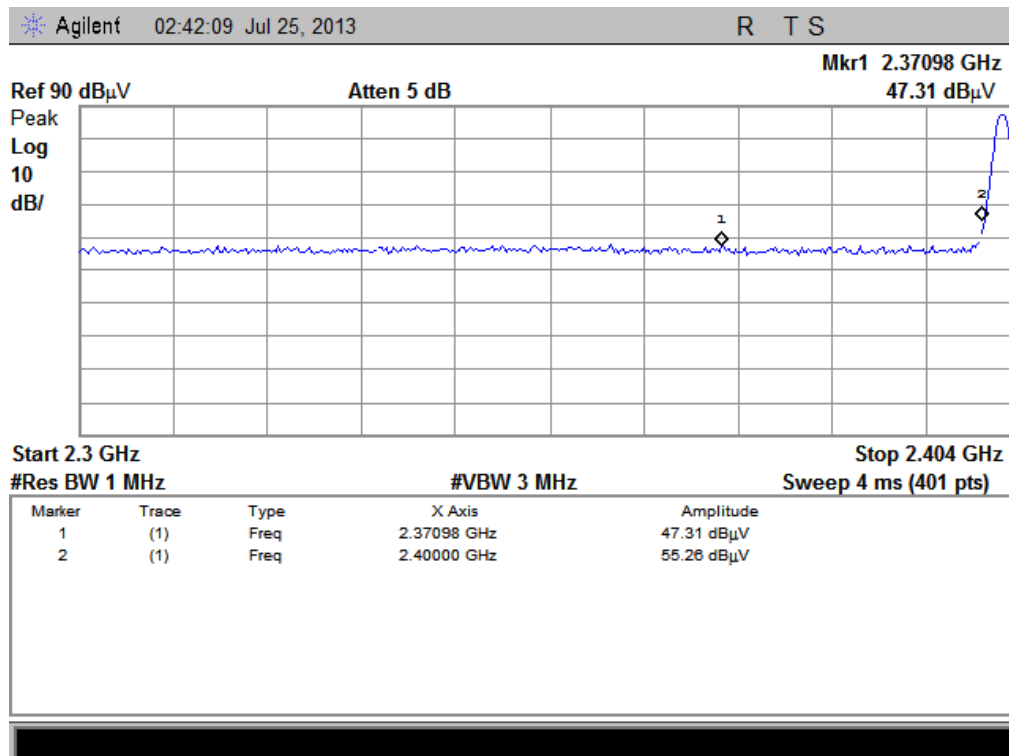


(Plot A1: Channel = 0 PEAK @ GFSK)

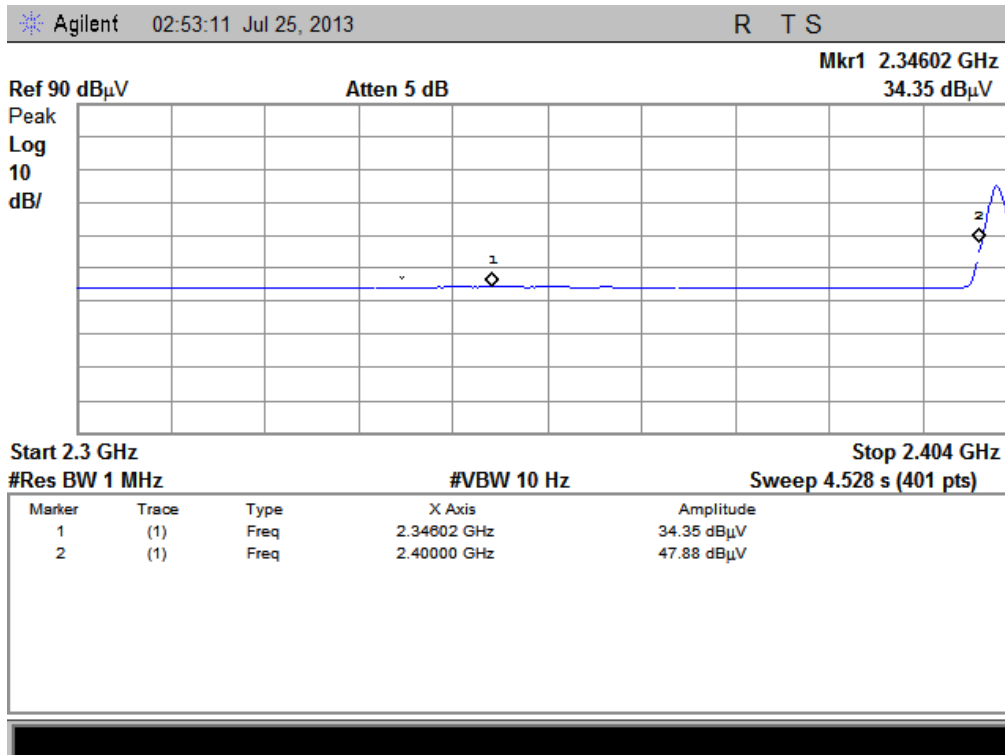

(Plot A2: Channel = 0 AVERAGE @ GFSK)

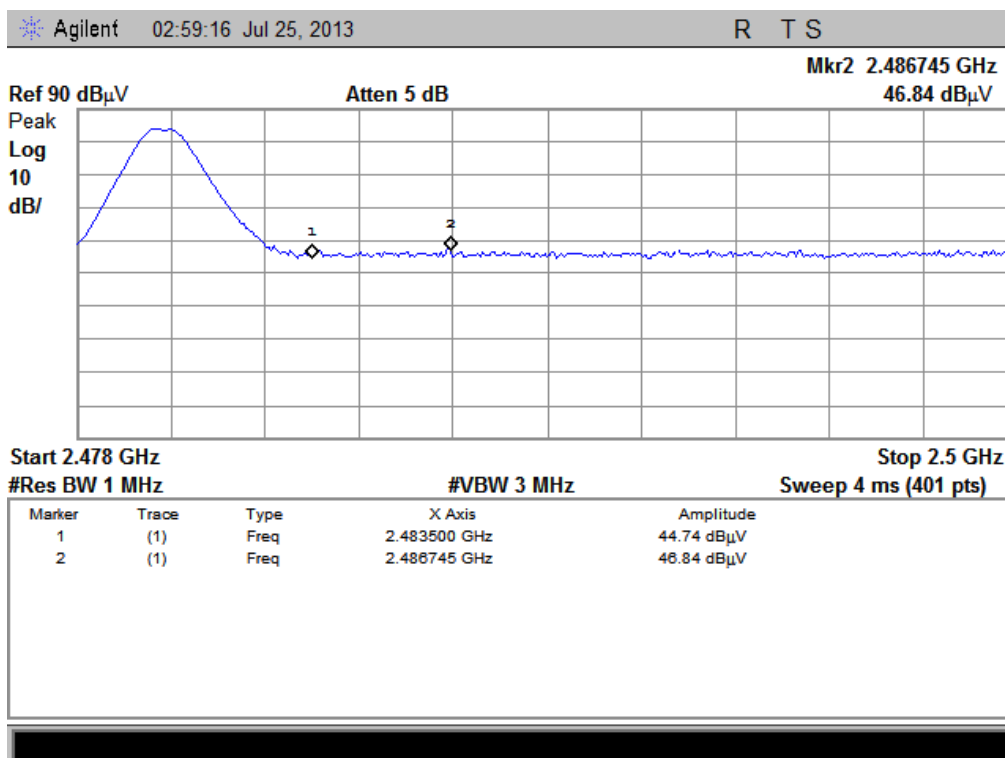

(Plot B1: Channel = 78 PEAK @ GFSK)

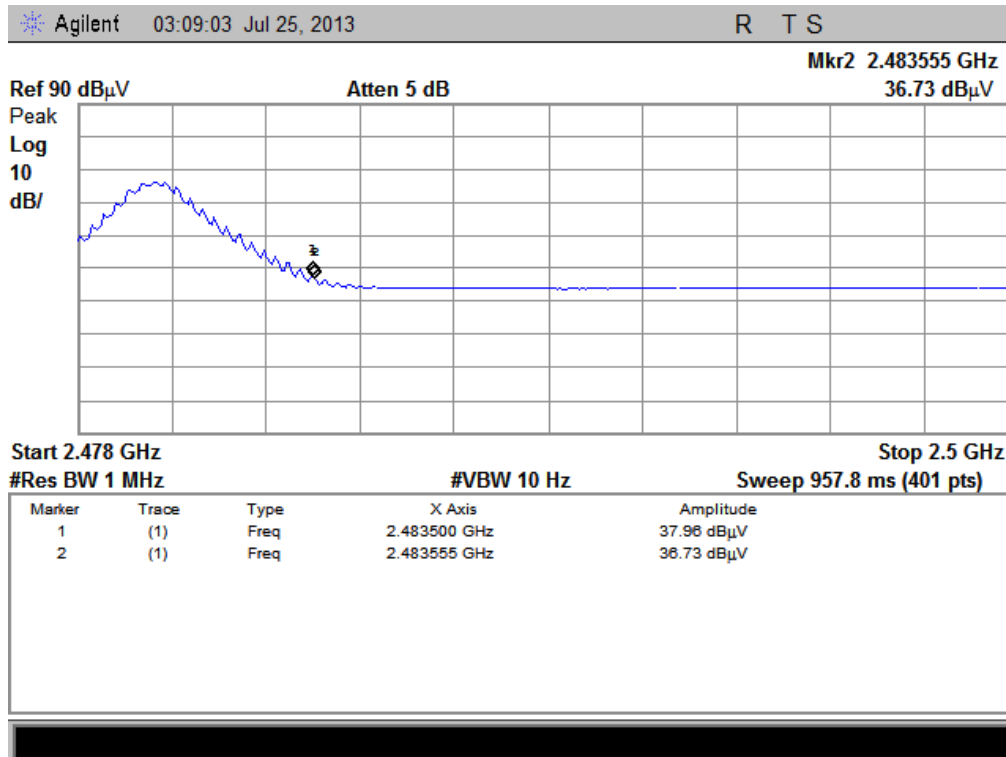


(Plot B2: Channel = 78 AVERAGE @ GFSK)

#### 2.8.4.2. $\pi/4$ -DQPSK Mode


##### A. Test Verdict:

| Channel | Frequency (MHz) | Detector | Receiver Reading UR (dBuV) | AT (dB) | AFactor (dB@3m) | Max. Emission E (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Verdict |
|---------|-----------------|----------|----------------------------|---------|-----------------|--------------------------------|----------------------|---------|
|         |                 | PK/ AV   |                            |         |                 |                                |                      |         |
| 0       | 2352.78         | PK       | 47.23                      | -30.93  | 32.56           | 48.86                          | 74                   | Pass    |
| 0       | 2398.54         | AV       | 34.87                      | -30.93  | 32.56           | 36.50                          | 54                   | Pass    |
| 78      | 2496.54         | PK       | 47.71                      | -29.05  | 32.50           | 51.16                          | 74                   | Pass    |
| 78      | 2483.56         | AV       | 37.33                      | -29.05  | 32.50           | 40.78                          | 54                   | Pass    |


##### B. Test Plots:

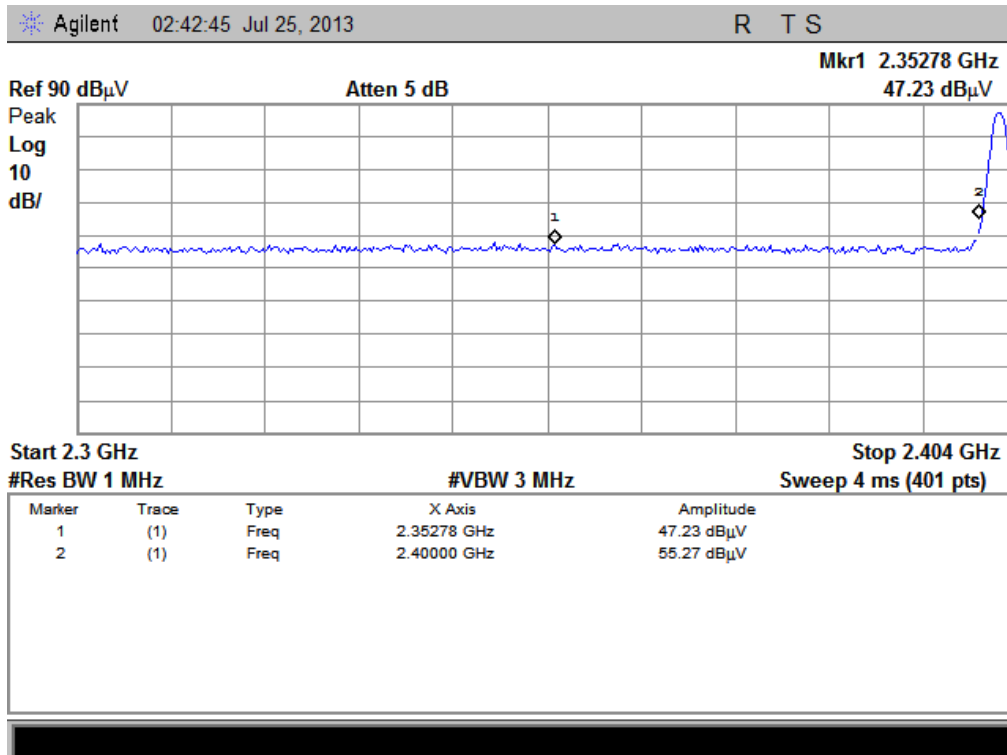


(Plot C1: Channel = 0 PEAK @  $\pi/4$ -DQPSK)

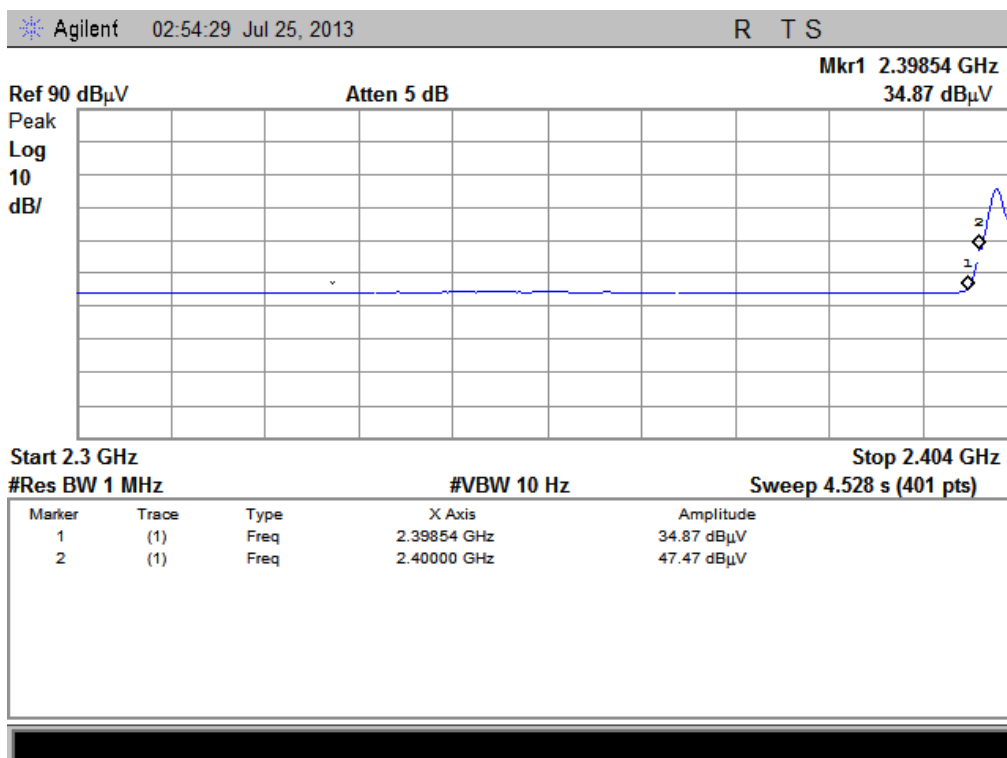

(Plot C2: Channel = 0 AVERAGE @  $\pi/4$ -DQPSK)

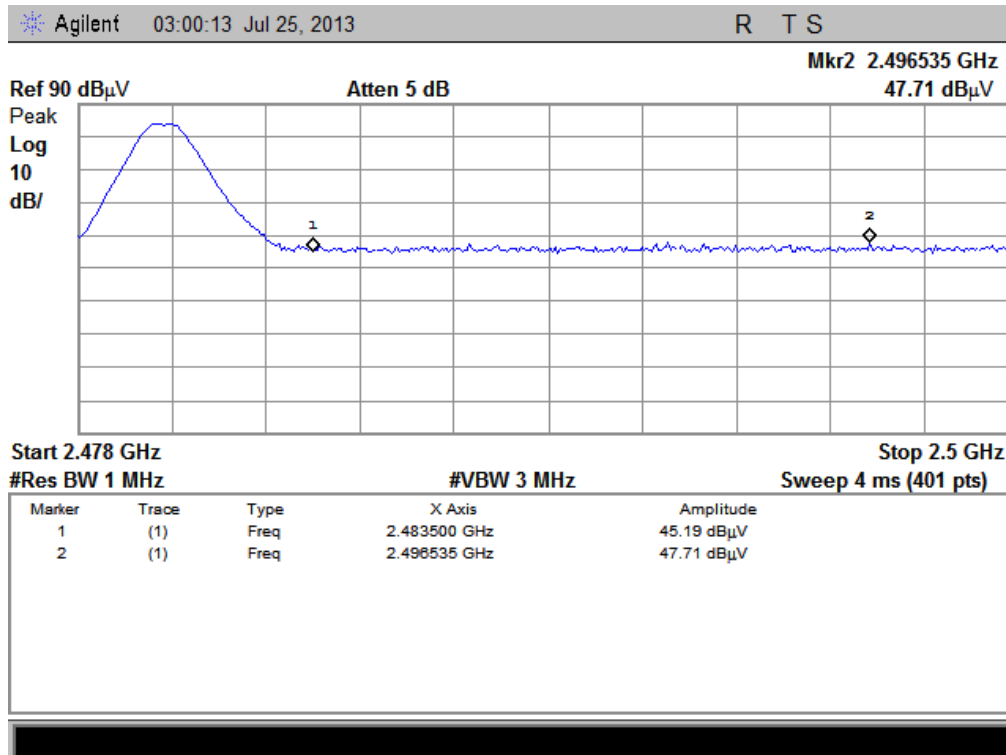

(Plot D1: Channel = 78 PEAK @  $\pi/4$ -DQPSK)

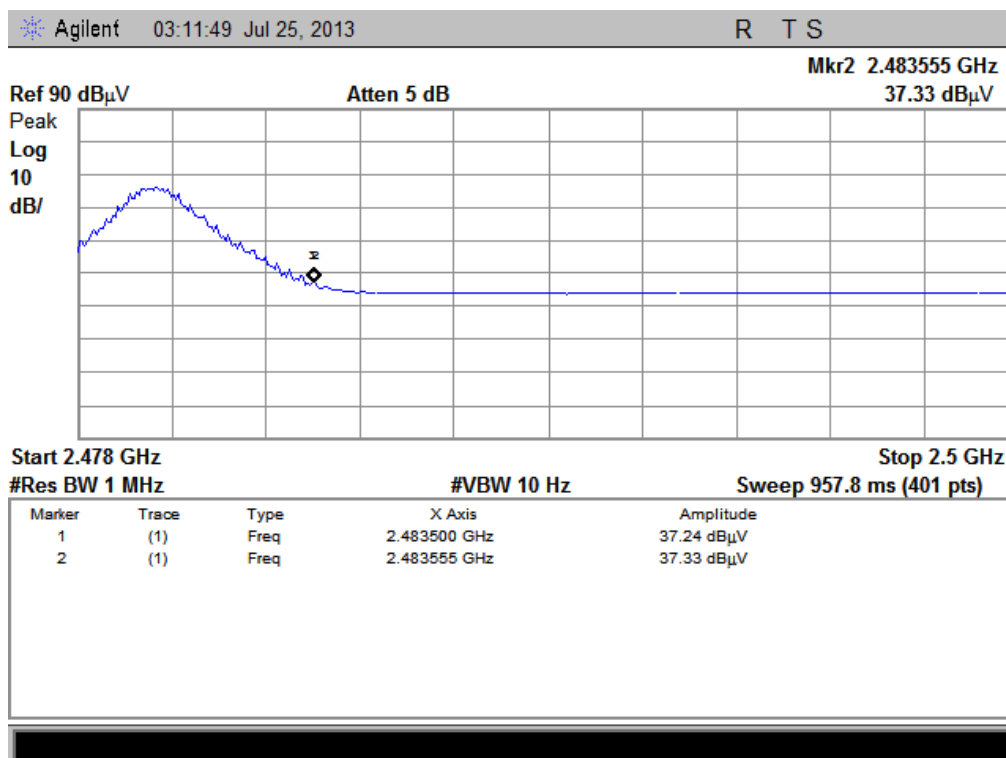


(Plot D2: Channel = 78 AVERAGE @  $\pi/4$ -DQPSK)

### 2.8.4.3. 8-DPSK Mode

#### A. Test Verdict:


| Channel | Frequency (MHz) | Detector | Receiver Reading UR (dBuV) | AT (dB) | AFactor (dB@3m) | Max. Emission E (dBμV/m) | Limit (dBμV/m) | Verdict |
|---------|-----------------|----------|----------------------------|---------|-----------------|--------------------------|----------------|---------|
|         |                 | PK/ AV   |                            |         |                 |                          |                |         |
| 0       | 2351.22         | PK       | 47.38                      | -30.93  | 32.56           | 49.01                    | 74             | Pass    |
| 0       | 2352.78         | AV       | 34.39                      | -30.93  | 32.56           | 36.02                    | 54             | Pass    |
| 78      | 2495.22         | PK       | 47.25                      | -29.05  | 32.50           | 50.70                    | 74             | Pass    |
| 78      | 2483.56         | AV       | 37.48                      | -29.05  | 32.50           | 40.93                    | 54             | Pass    |

## B. Test Plots:

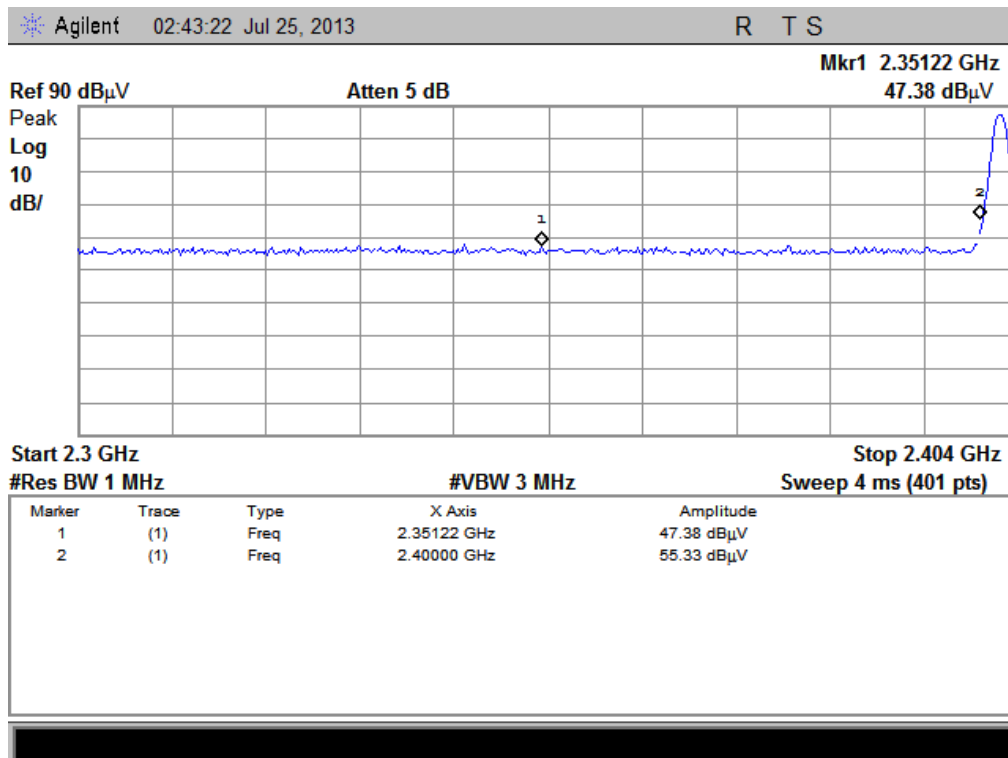


(Plot E1: Channel = 0 PEAK @ 8-DPSK Mode)




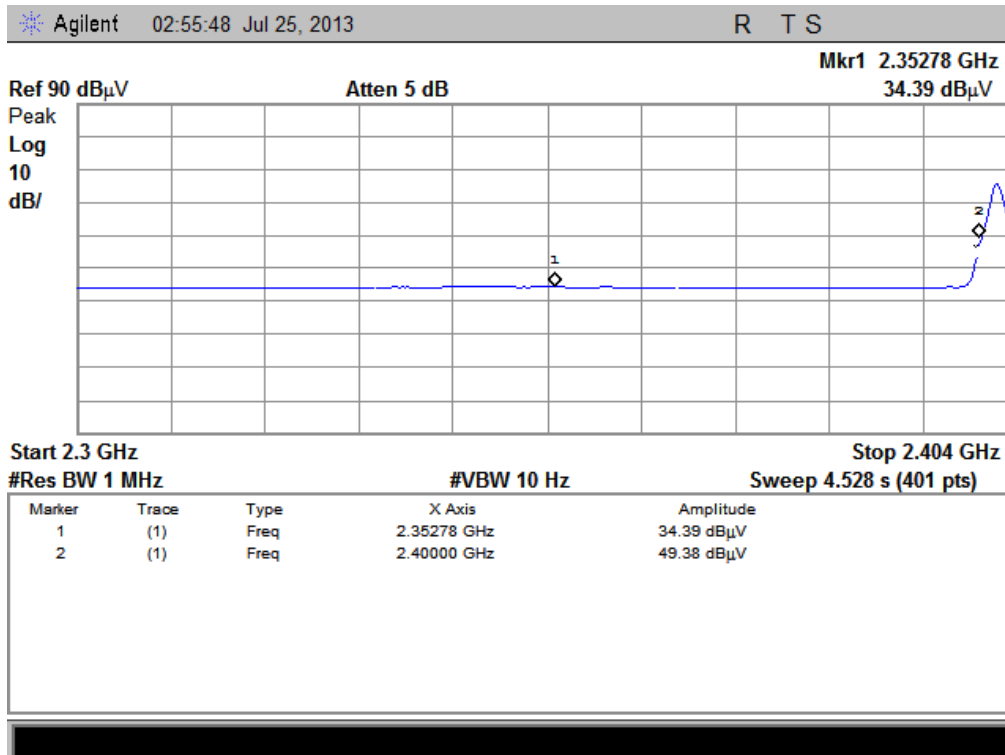

(Plot E2: Channel = 0 AVERAGE @ 8-DPSK Mode)

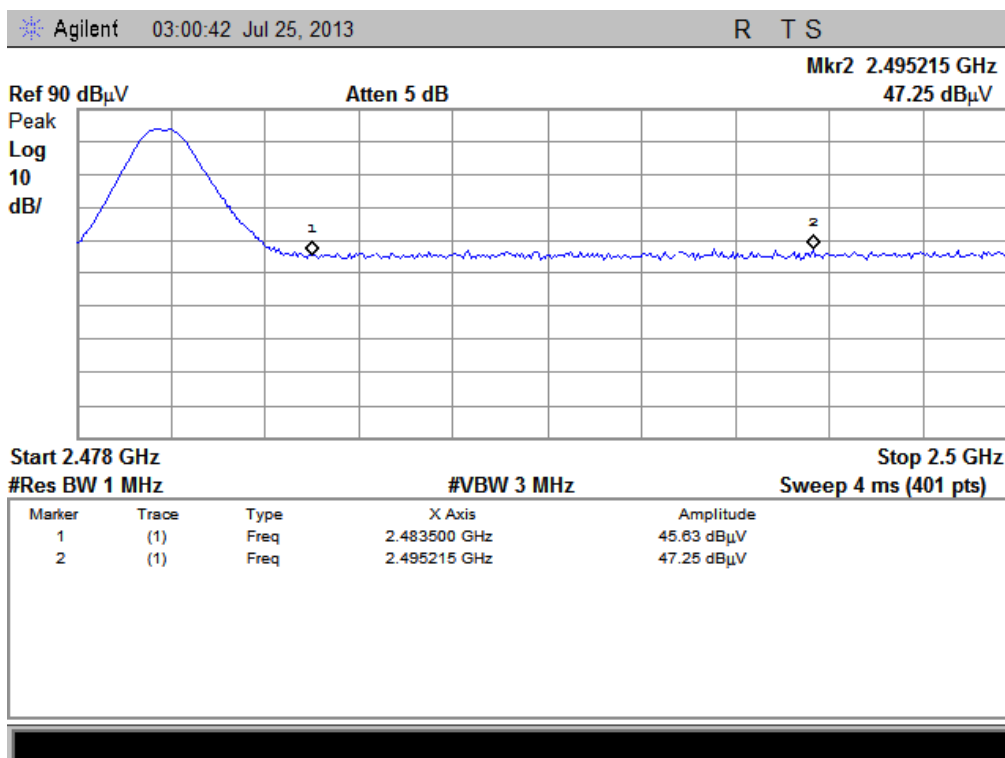

(Plot F1: Channel = 78 PEAK @ 8-DPSK Mode)

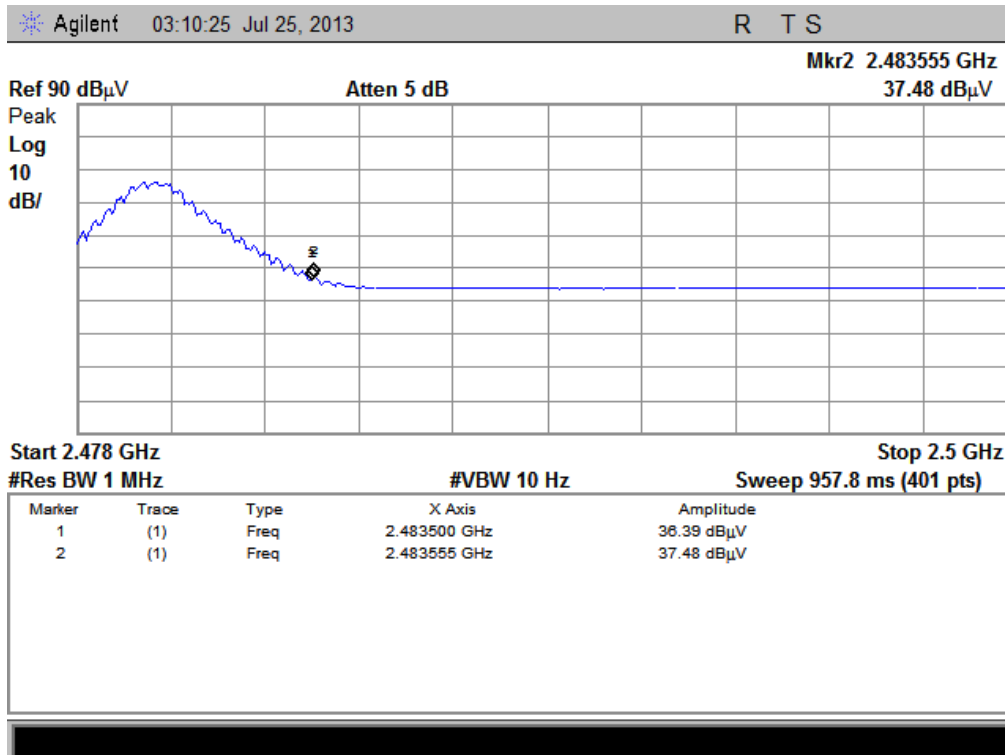

(Plot F2: Channel = 78 AVERAGE @ 8-DPSK Mode)

## 2.9. Conducted Emission

### 2.9.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


| Frequency range (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------|------------------------------|----------|
|                       | Quai-peak                    | Average  |
| 0.15 - 0.50           | 66 to 56                     | 56 to 46 |
| 0.50 - 5              | 56                           | 46       |
| 5- 30                 | 60                           | 50       |

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.9.2. Test Description

#### A. Test Setup:

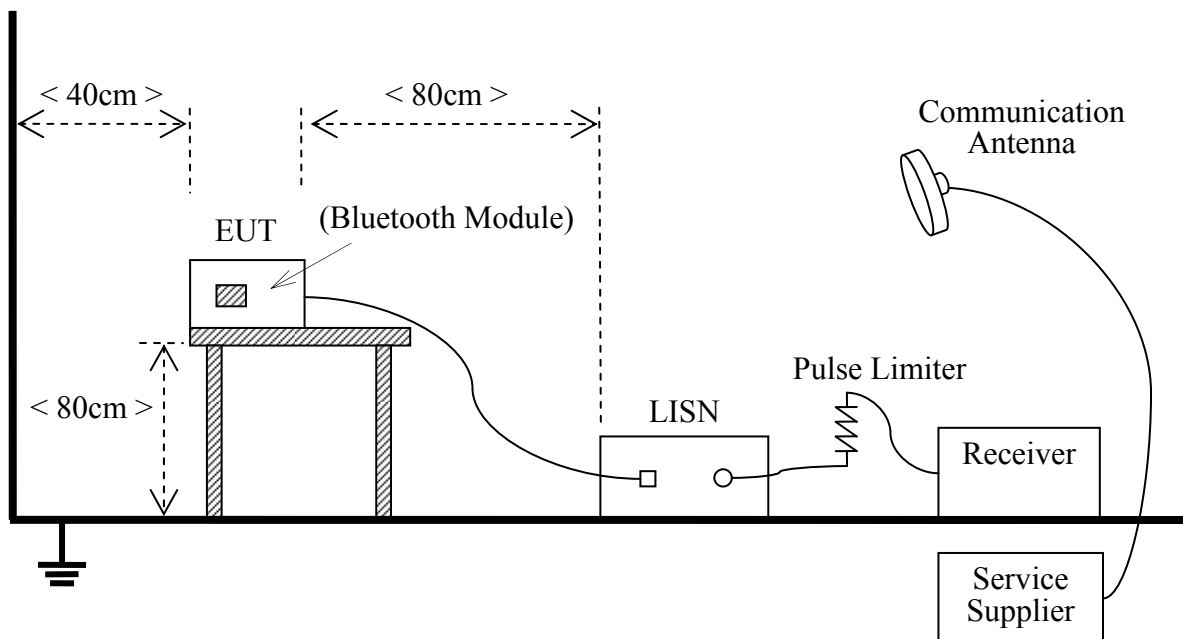

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

#### Equipments List:

| Description | Manufacturer | Model  | Serial No. | Cal. Date  | Cal. Due   |
|-------------|--------------|--------|------------|------------|------------|
| Receiver    | Agilent      | E7405A | US44210471 | 2013.05.12 | 2014.05.11 |

| Description          | Manufacturer | Model       | Serial No. | Cal. Date  | Cal. Due   |
|----------------------|--------------|-------------|------------|------------|------------|
| LISN                 | Schwarzbeck  | NSLK 8127   | 812744     | 2013.05.12 | 2014.05.11 |
| Service Supplier     | R&S          | CMU200      | 100448     | 2013.05.12 | 2014.05.11 |
| Pulse Limiter (20dB) | Schwarzbeck  | VTSD 9561-D | 9391       | 2013.05.12 | 2014.05.11 |


### 2.9.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


#### A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

#### B. Test Plots:

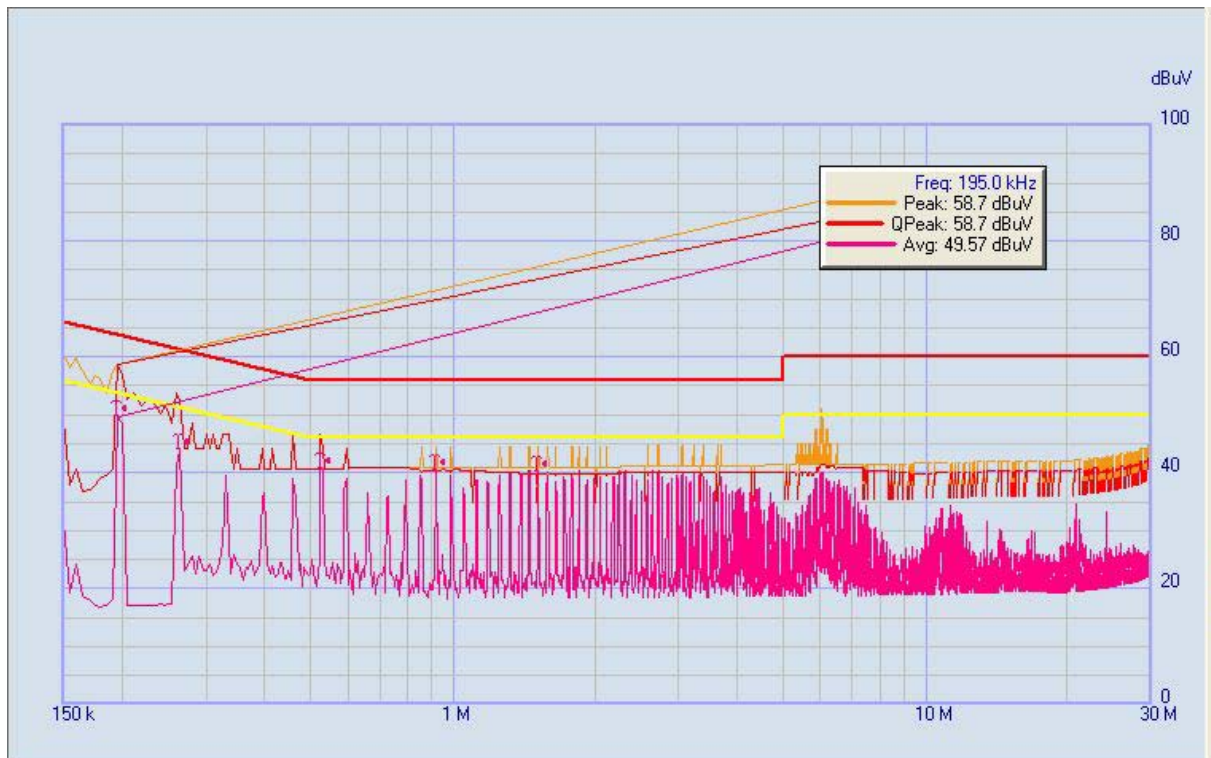

(Plot A: L Phase)

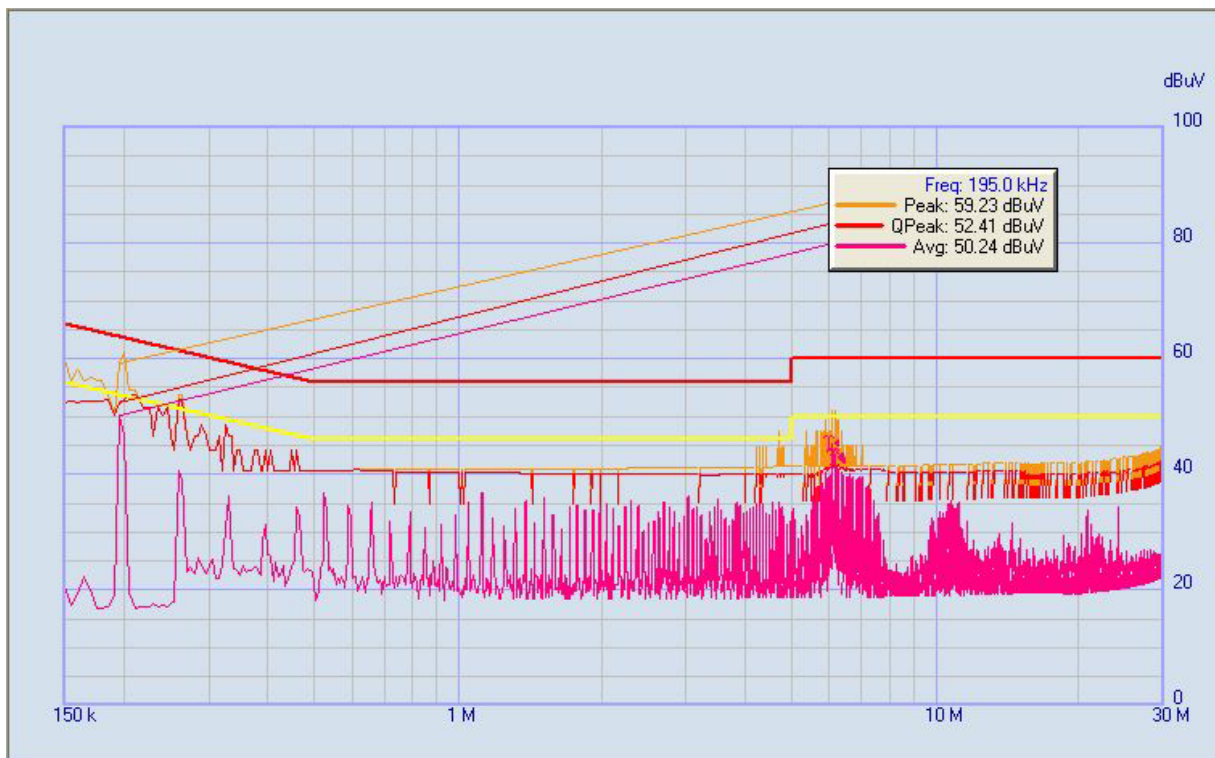

(Plot B: N Phase)

## 2.10. Radiated Emission

### 2.10.1. Requirement

According to FCC section 15.247(d) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                        | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)                       | 30                       |
| 1.705 - 30.0    | 30                                 | 30                       |
| 30 - 88         | 100                                | 3                        |
| 88 - 216        | 150                                | 3                        |
| 216 - 960       | 200                                | 3                        |
| Above 960       | 500                                | 3                        |

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


### 2.10.2. Test Description

#### A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

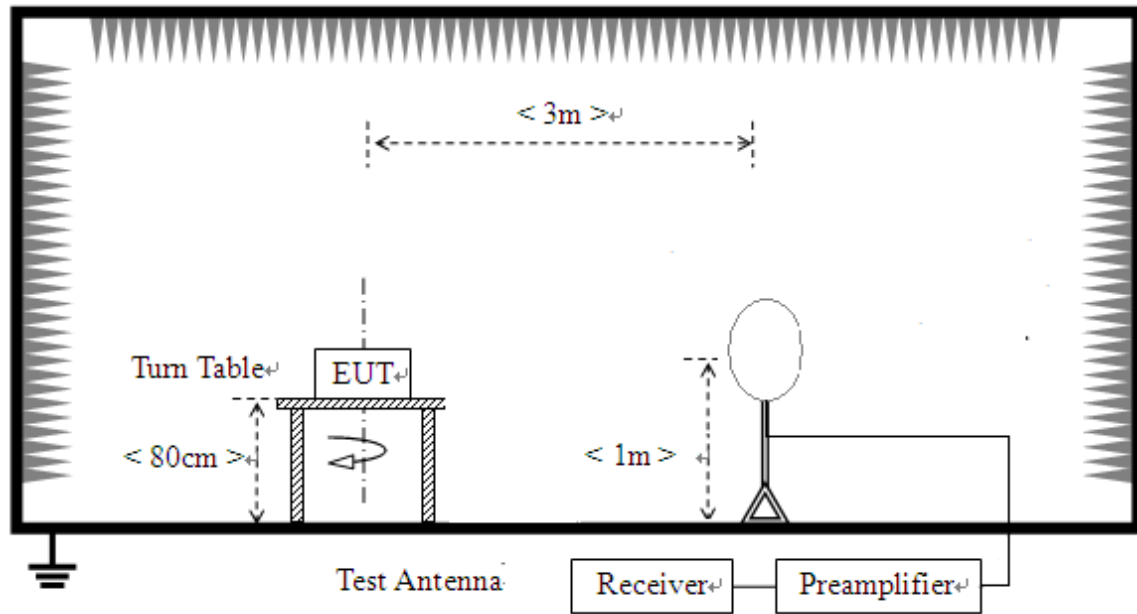

2) For radiated emissions from 30MHz to 1GHz

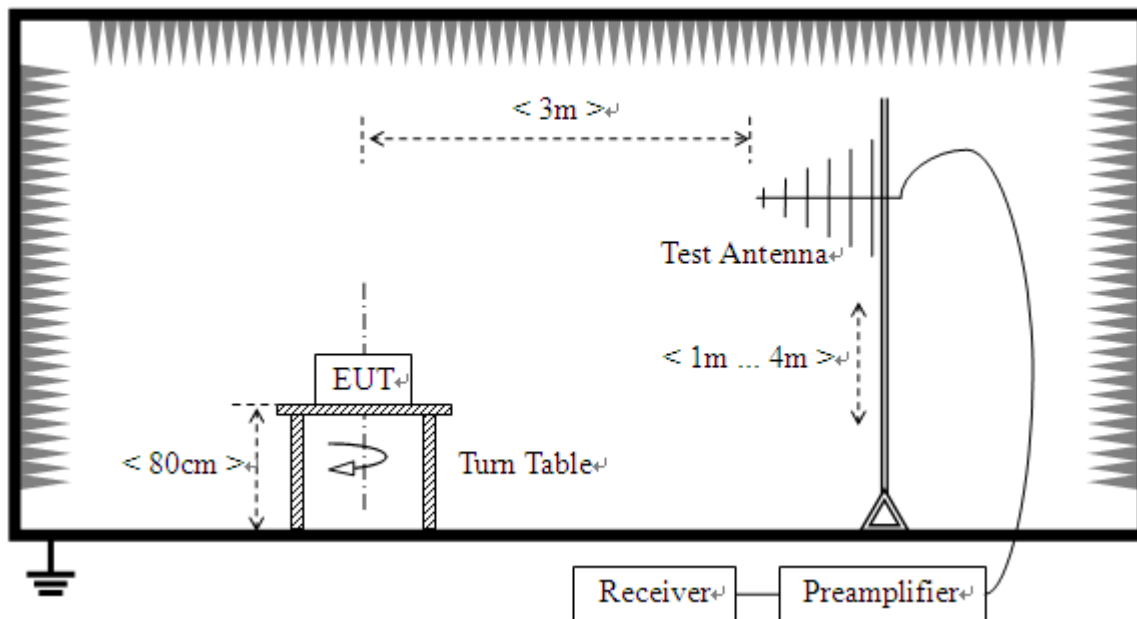

### 3) For radiated emissions above 1GHz

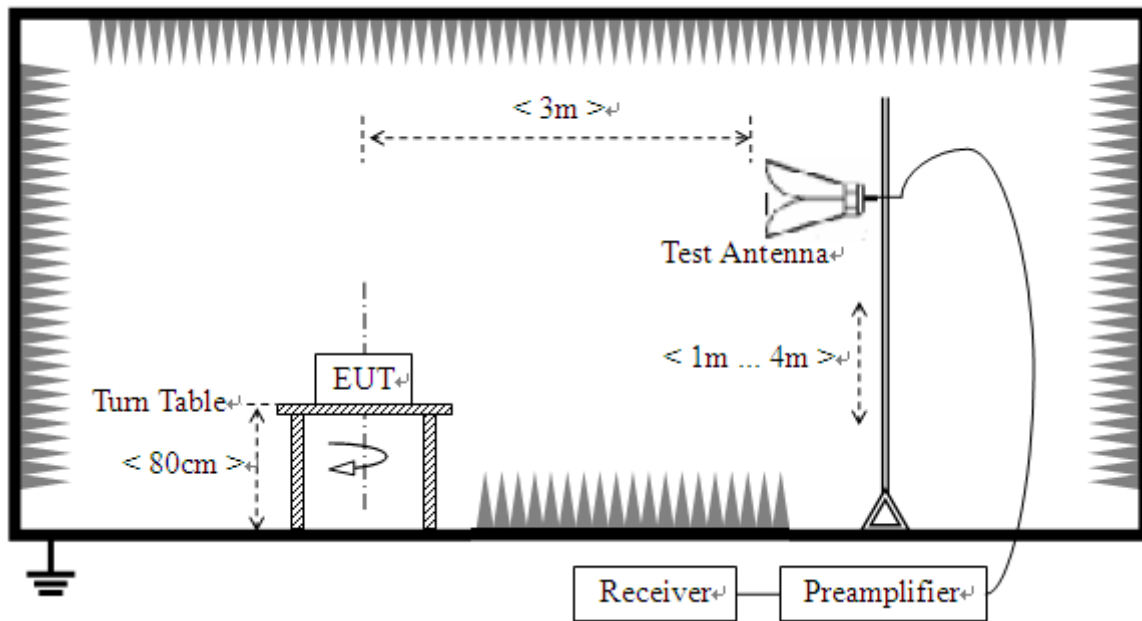

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 2GHz) and Horn Test Antenna (above 2GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

### B. Equipments List:

| Description           | Manufacturer | Model      | Serial No. | Cal. Date  | Cal. Due   |
|-----------------------|--------------|------------|------------|------------|------------|
| System Simulator      | R&S          | CMU200     | 100448     | 2013.05.12 | 2014.05.11 |
| Receiver              | Agilent      | E7405A     | US44210471 | 2013.05.12 | 2014.05.11 |
| Full-Anechoic Chamber | Albatross    | 9m*6m*6m   | (n.a.)     | 2012.05.12 | 2014.05.11 |
| Test Antenna - Bi-Log | Schwarzbeck  | VULB 9163  | 9163-274   | 2013.05.12 | 2014.05.11 |
| Test Antenna - Horn   | Schwarzbeck  | BBHA 9120D | 9120D-963  | 2013.05.12 | 2014.05.11 |



| Description         | Manufacturer | Model     | Serial No. | Cal. Date  | Cal. Due   |
|---------------------|--------------|-----------|------------|------------|------------|
| Test Antenna - Horn | R&S          | HL050S7   | 71688      | 2013.05.12 | 2014.05.11 |
| Test Antenna - Loop | Schwarzbeck  | FMZB 1519 | 1519-022   | 2013.05.12 | 2014.05.11 |

### 2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 2.10.4. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB } \mu \text{ V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


#### 2.10.4.1. GFSK Mode:

##### A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

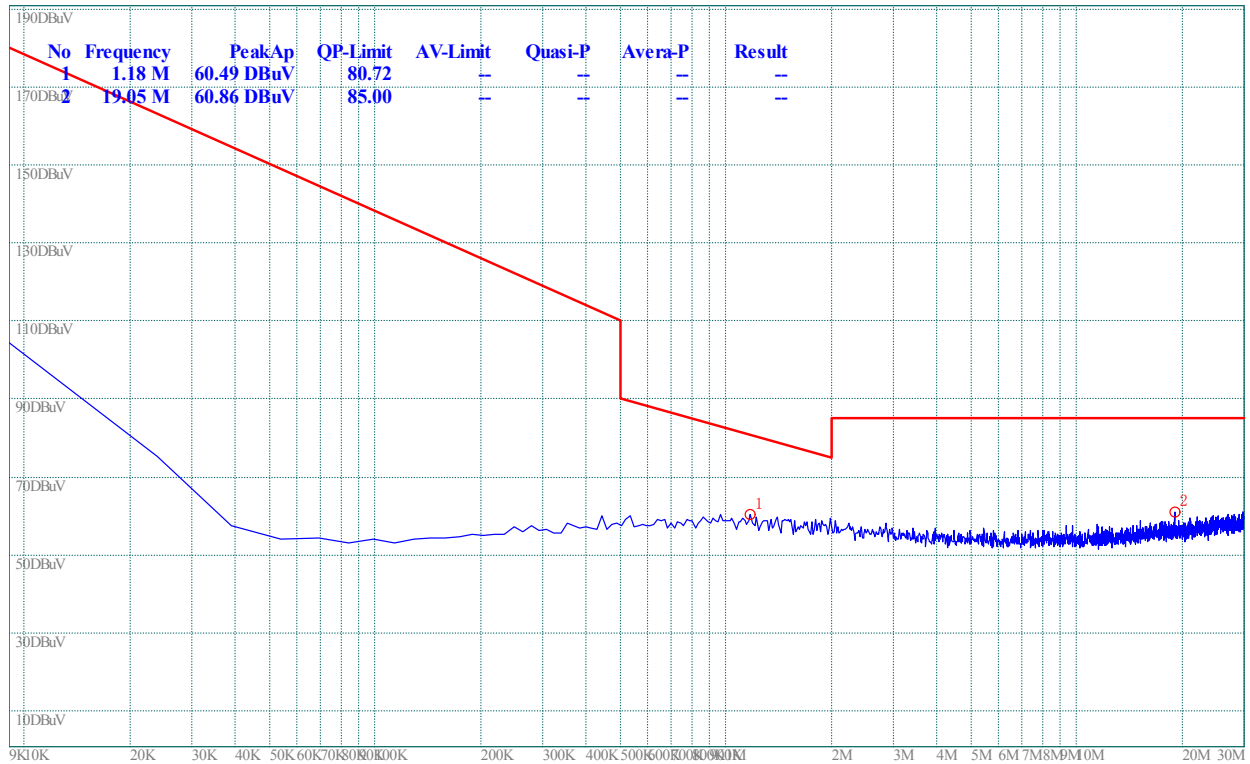


(Plot A.0: 9kHz to 30MHz @ GFSK, channel 0)

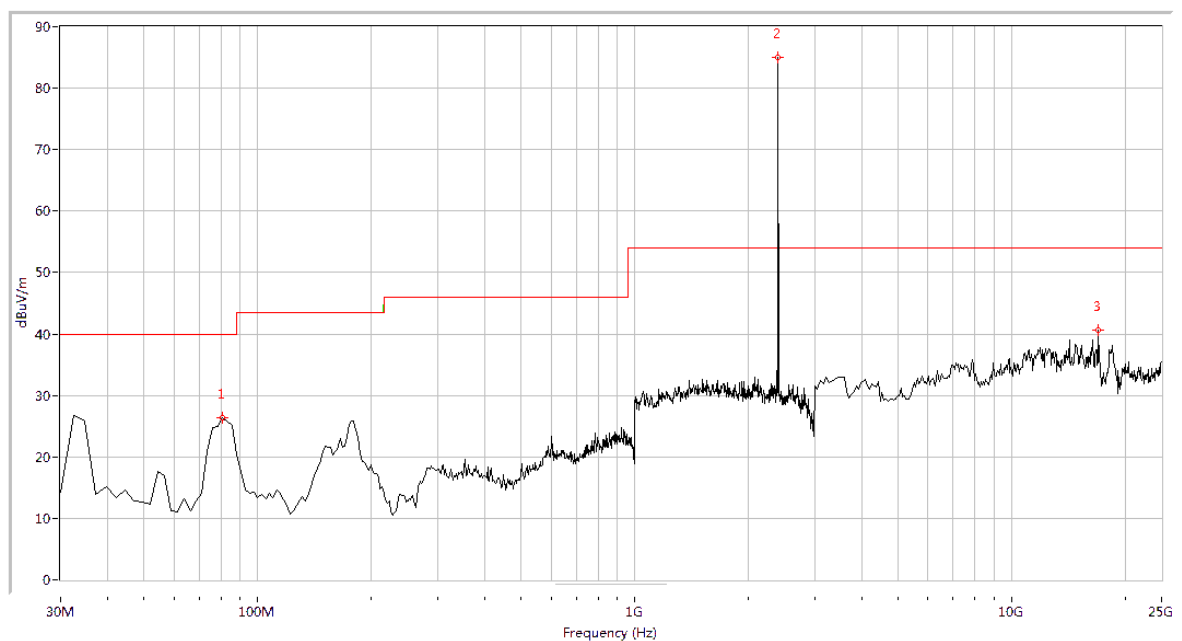

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 80.798     | 26.39 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2402.000   | 84.93 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 16990.025  | 40.64 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |


(Plot A.1: 30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)

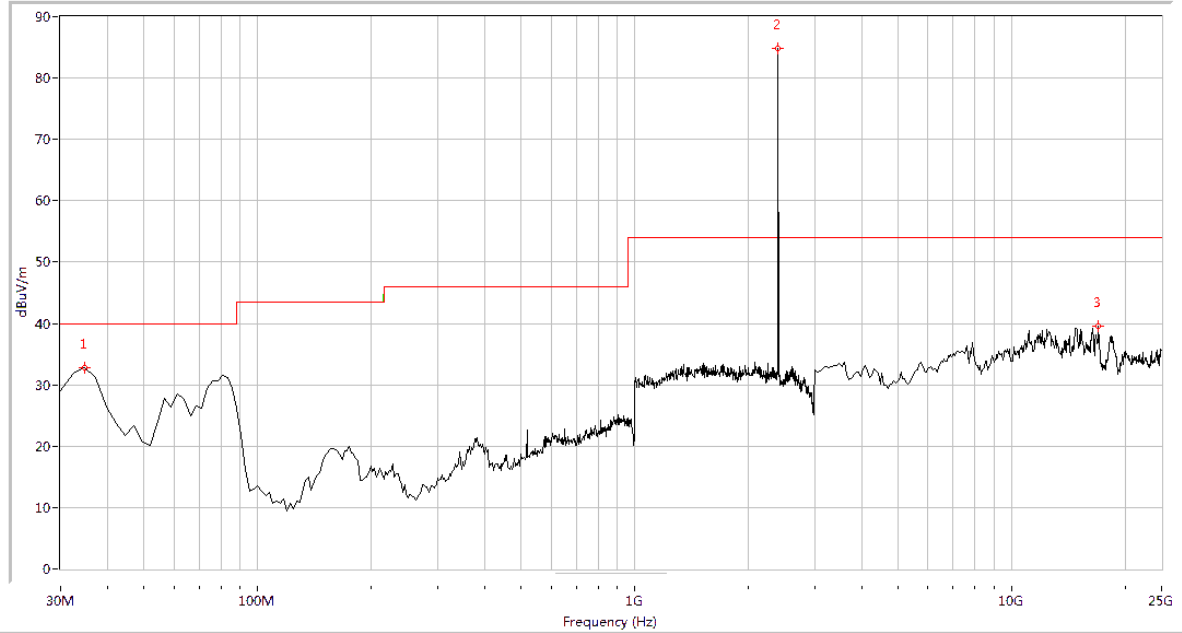


| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838     | 32.77 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2402.000   | 84.84 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 16990.025  | 39.60 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot A.2: 30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)

### Plot for Channel = 39

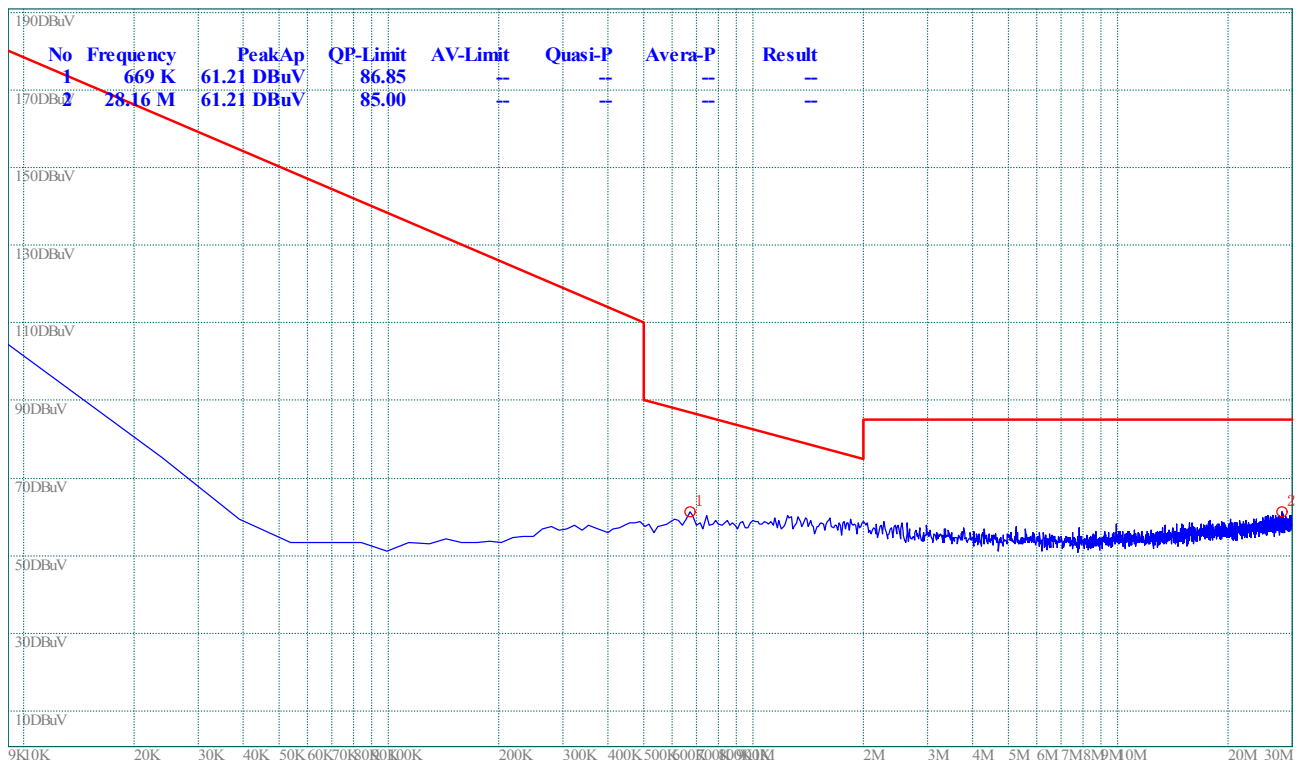


(Plot B.0: 9kHz to 30MHz @ GFSK, channel 39)

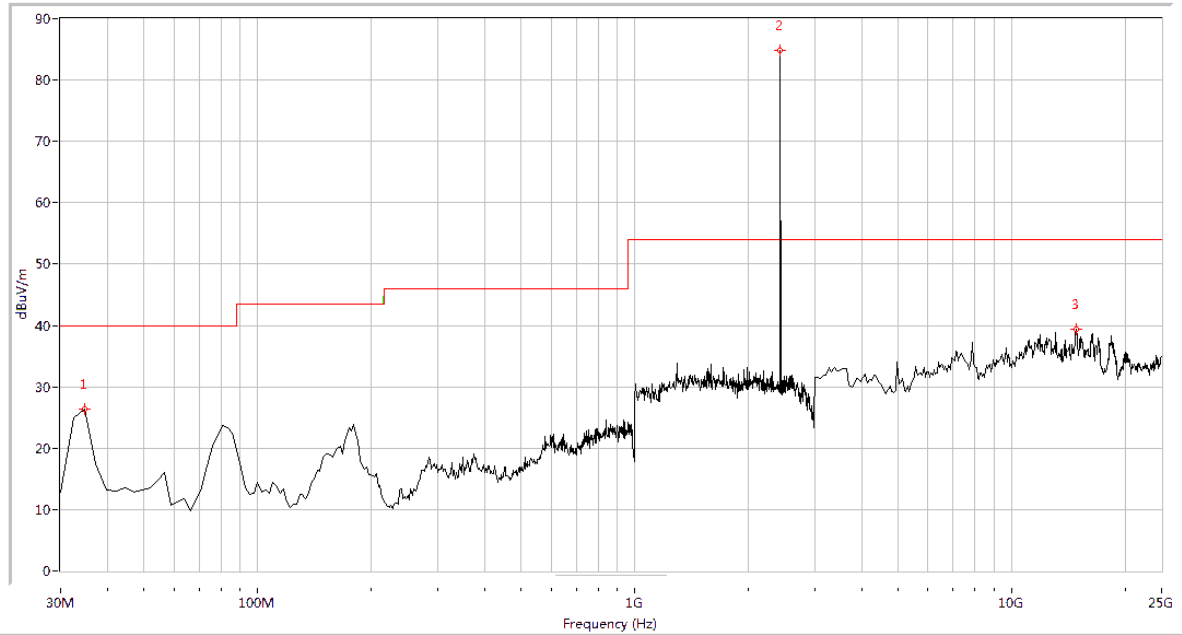

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 34.838     | 26.29 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2441.000   | 84.89 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 14850.374  | 39.41 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |


(Plot B.1: 30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)

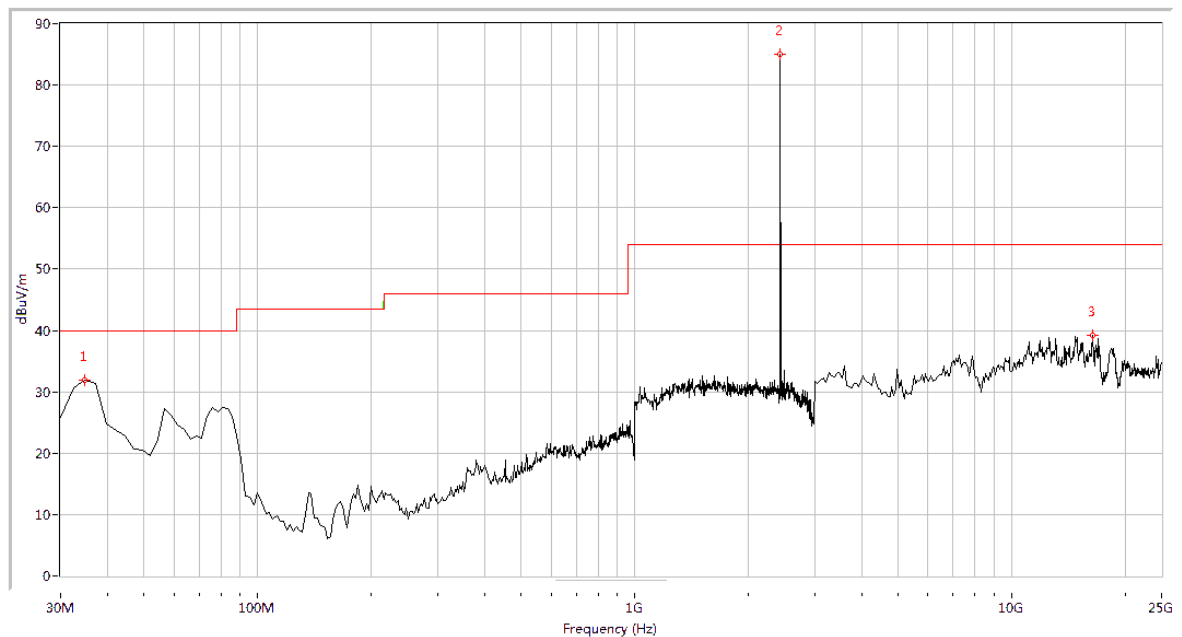


| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838     | 31.88 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2441.000   | 84.92 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 16386.534  | 39.25 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot B.2: 30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)

# Plot for Channel = 78

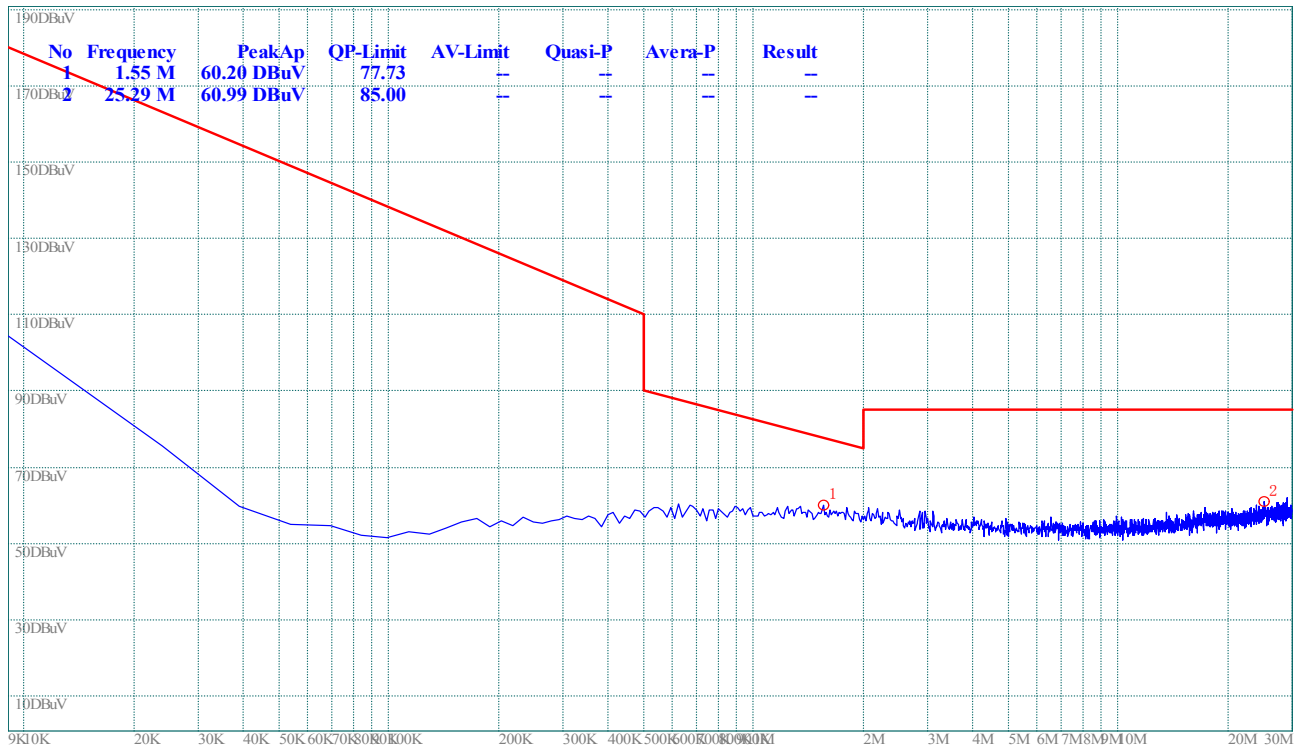


(Plot C.0: 9kHz to 30MHz @ GFSK, channel 78)

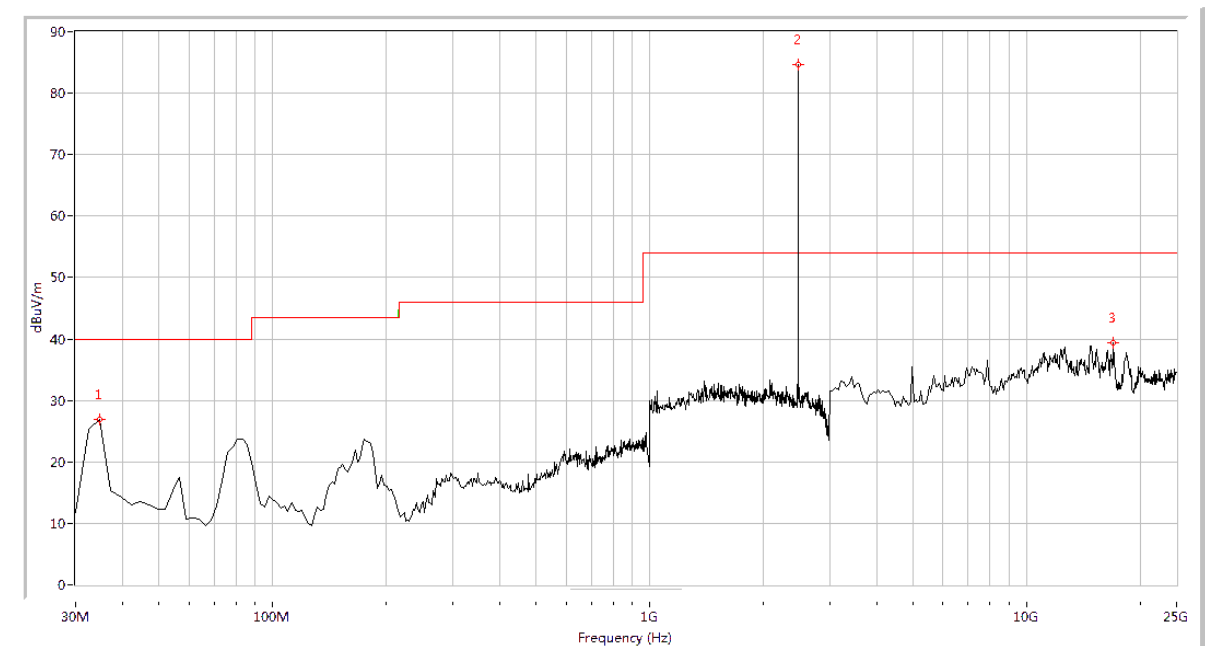

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 34.838     | 26.88 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2480.000   | 84.59 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 16990.025  | 39.45 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Plot C.1: 30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)

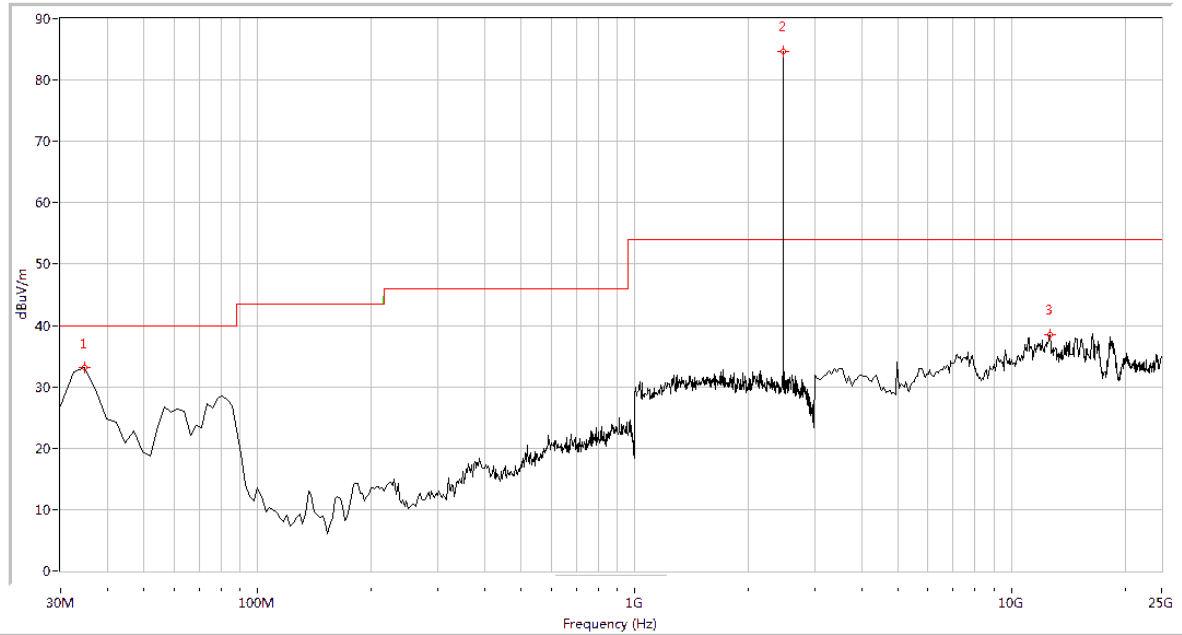



| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838     | 33.10 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2480.000   | 84.59 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 12655.860  | 38.50 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot C.2: 30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)

#### 2.10.4.2. $\pi/4$ -DQPSK Mode:


##### A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

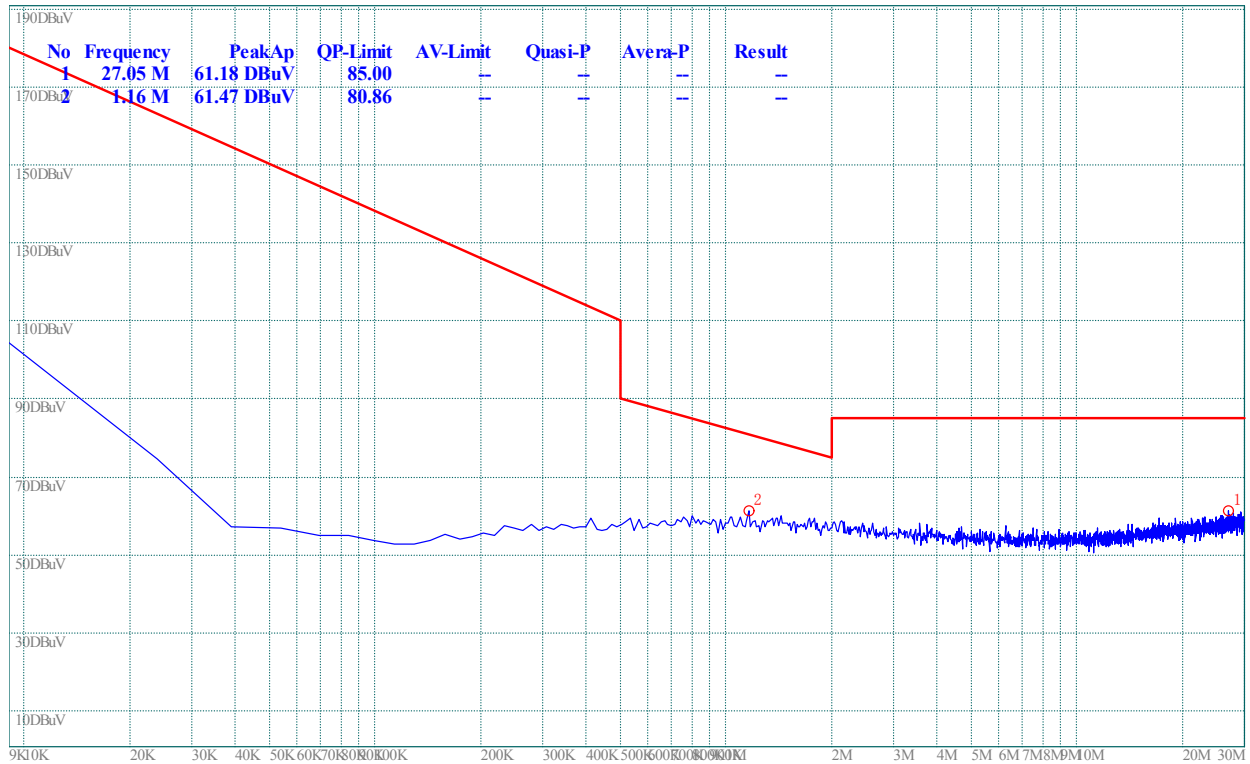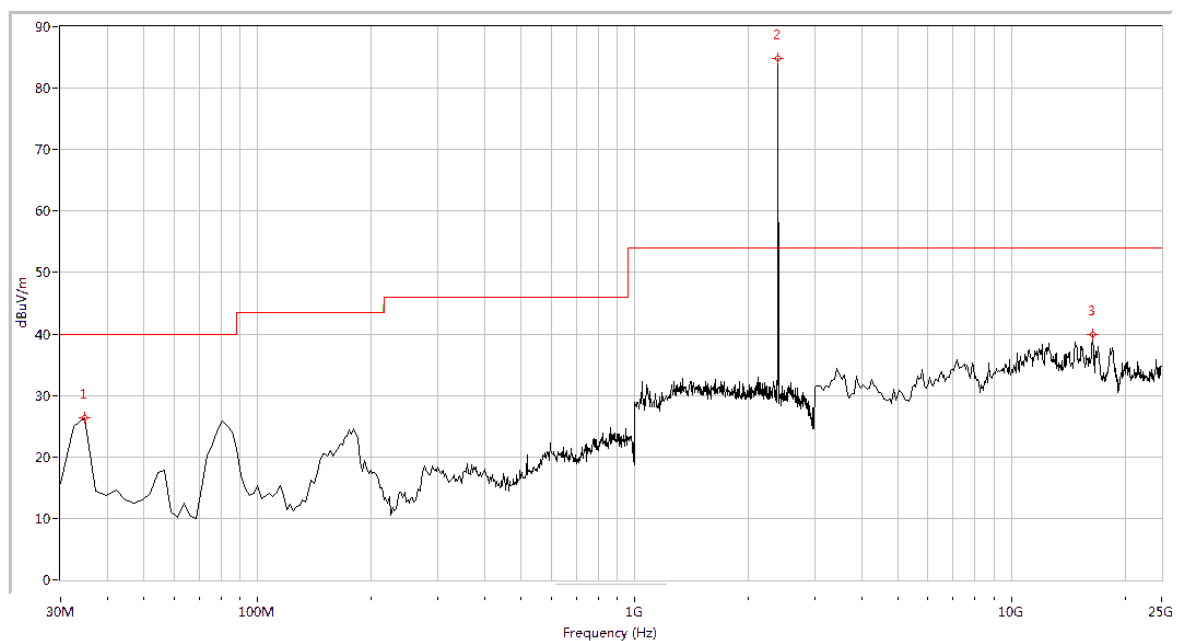
(Plot A.0: 9kHz to 30MHz @  $\pi/4$ -DQPSK, channel 0)


| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 34.838     | 26.35 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2402.000   | 84.92 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 16386.534  | 39.98 | N.A | N.A | 54.0     | N.A      | 54.0     | Horizontal | PASS    |

(Plot A.1: 30MHz to 25GHz, Antenna Horizontal @  $\pi/4$ -DQPSK, channel 0)

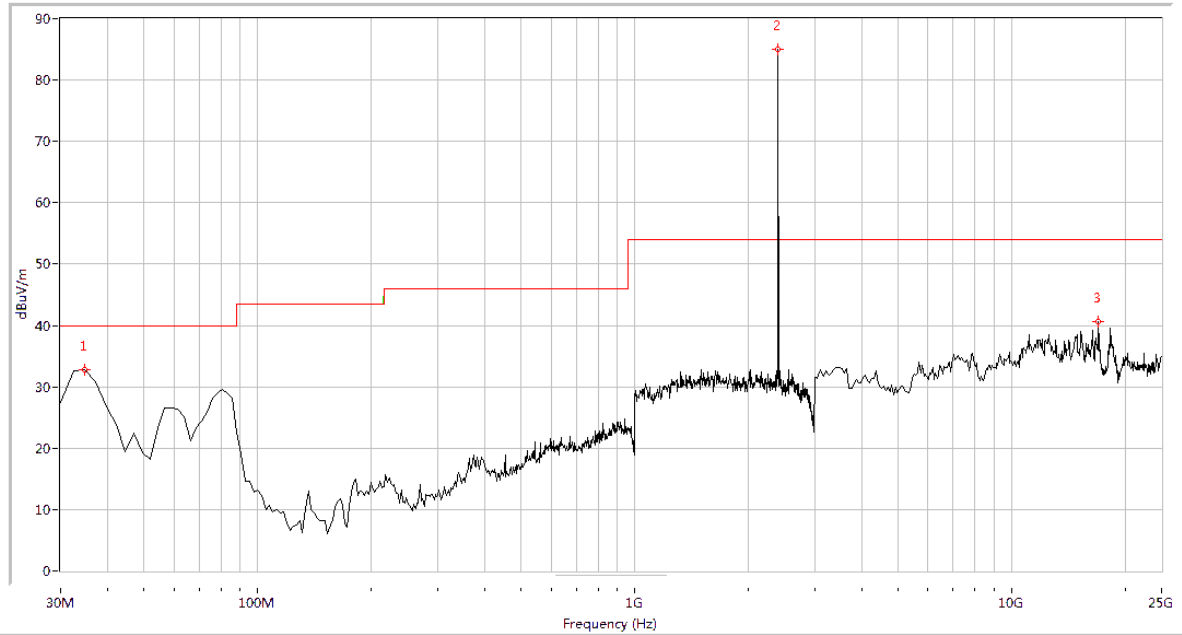

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838     | 32.80 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2402.000   | 84.92 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 16990.025  | 40.61 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |


(Plot A.2: 30MHz to 25GHz, Antenna Vertical @  $\pi/4$ -DQPSK, channel 0)

### Plot for Channel = 39




(Plot B.0: 9kHz to 30MHz @  $\pi/4$ -DQPSK, channel 39)



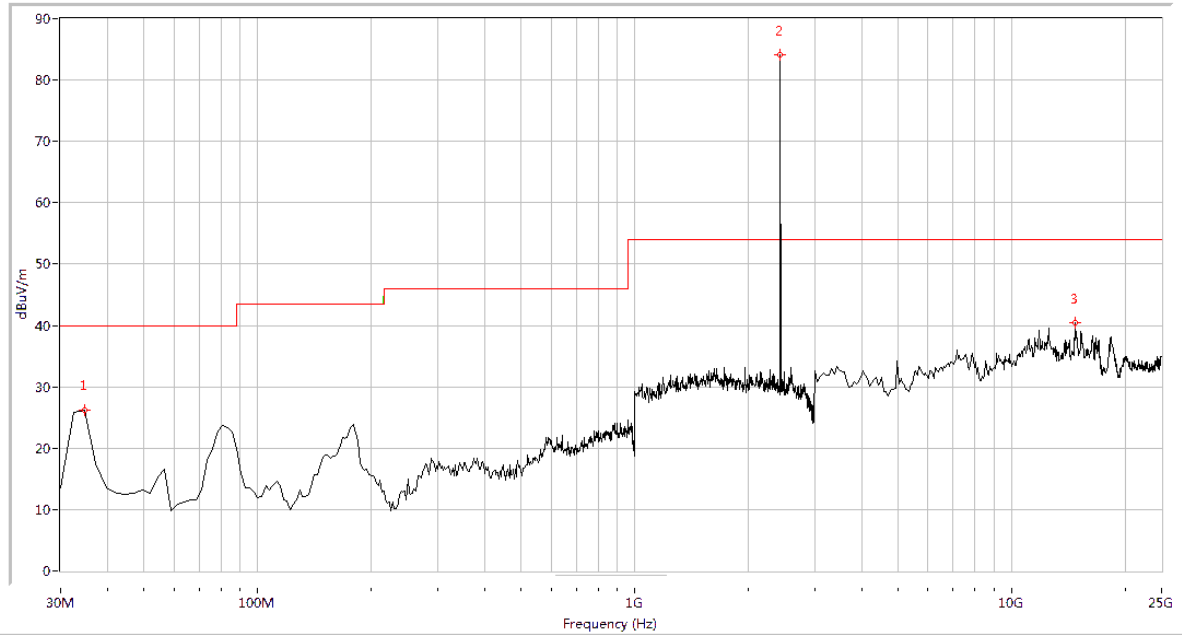

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 34.838     | 26.20 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2441.000   | 84.14 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 14795.511  | 40.50 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |


(Plot B.1: 30MHz to 25GHz, Antenna Horizontal @  $\pi/4$ -DQPSK, channel 39)

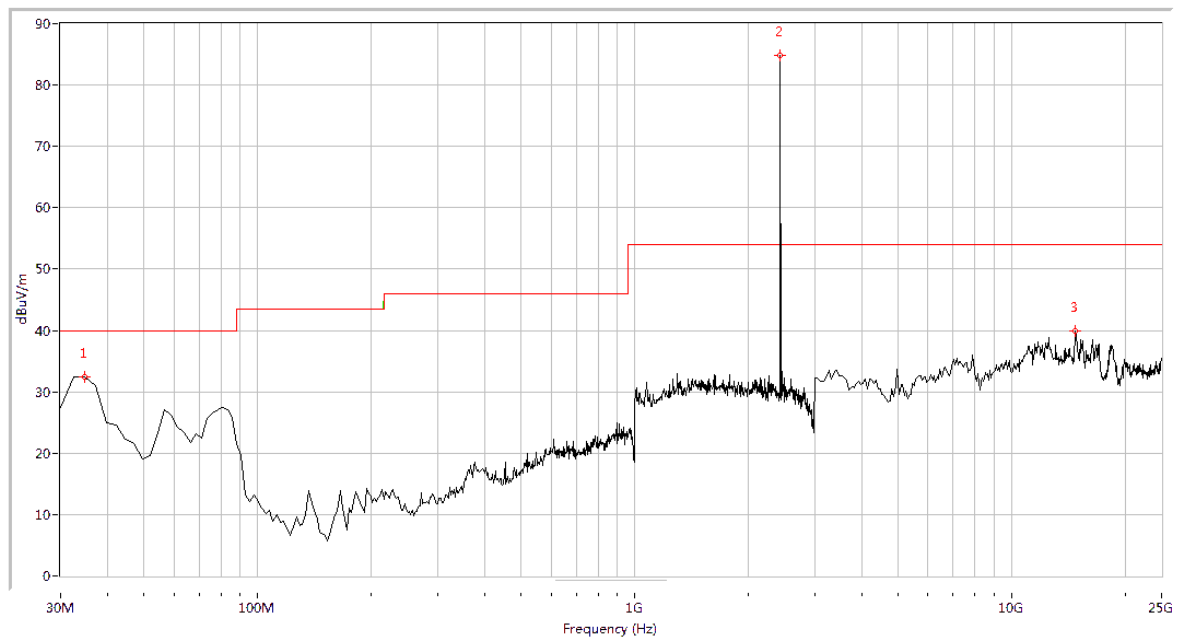


| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838     | 32.43 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2441.000   | 84.85 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 14795.511  | 39.83 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot B.2: 30MHz to 25GHz, Antenna Vertical @  $\pi/4$ -DQPSK, channel 39)

# Plot for Channel = 78

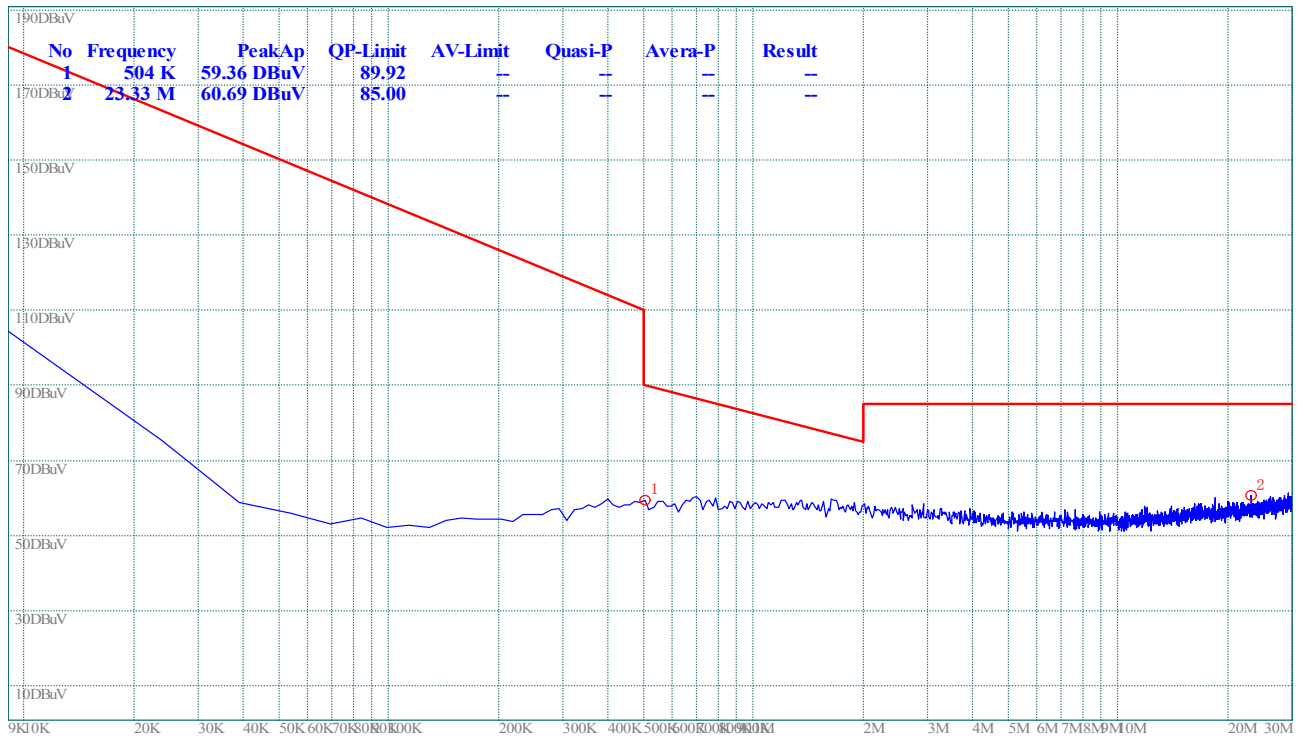


(Plot C.0: 9kHz to 30MHz @  $\pi/4$ -DQPSK, channel 78)

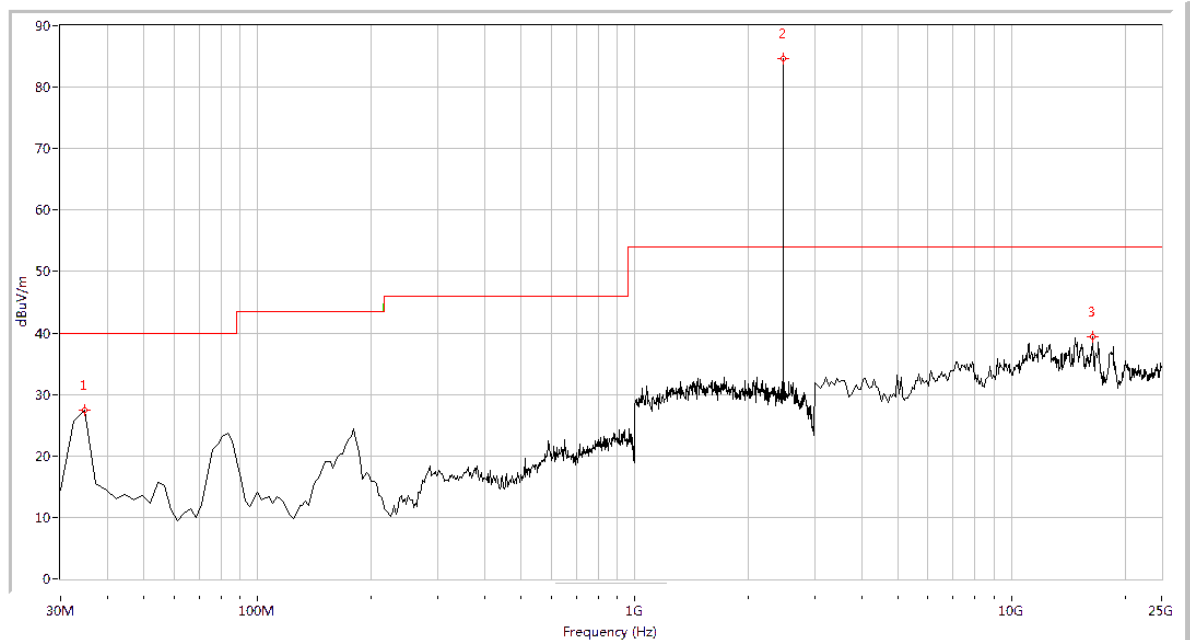

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 34.838     | 27.37 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2480.000   | 84.59 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 16386.534  | 39.46 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Plot C.1: 30MHz to 25GHz, Antenna Horizontal @  $\pi/4$ -DQPSK, channel 78)

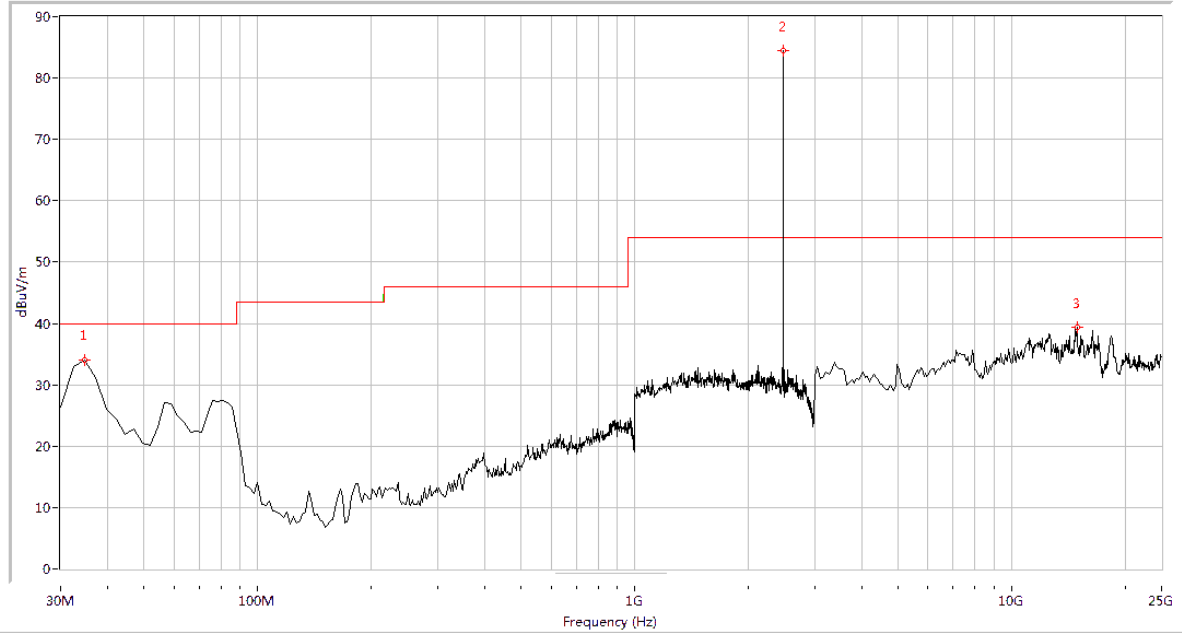

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838     | 33.96 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2480.000   | 84.45 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 14905.237  | 39.39 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot C.2: 30MHz to 25GHz, Antenna Vertical @  $\pi/4$ -DQPSK, channel 78)


### 2.10.4.3. 8-DPSK Mode:

#### A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0




(Plot A.0: 9kHz to 30MHz @8-DPSK, channel 0)

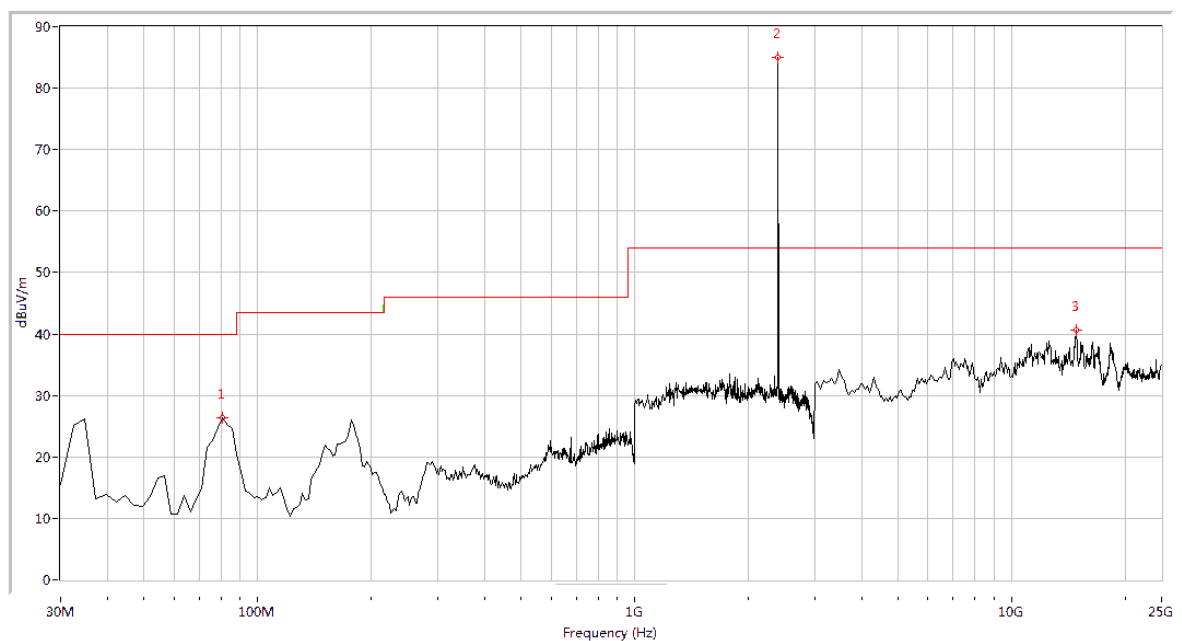

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 80.798     | 26.45 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2402.000   | 84.93 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 14850.374  | 40.57 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |


(Plot A.1: 30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 0)

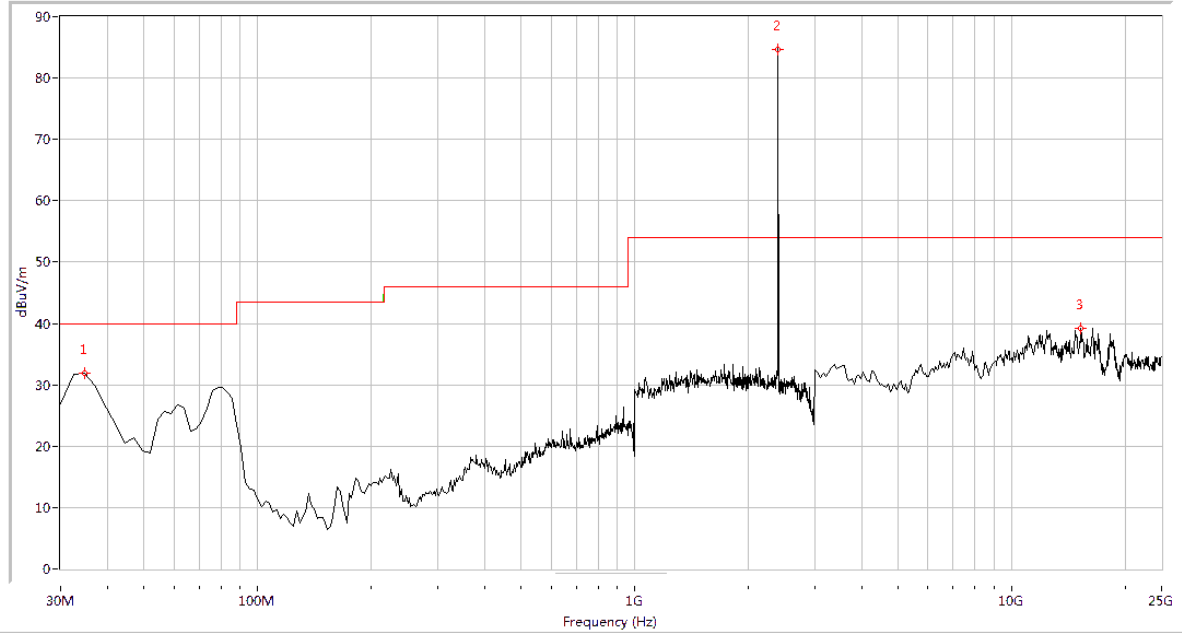


| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838     | 31.84 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2402.000   | 84.58 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 15289.277  | 39.20 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot A.2: 30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 0)

### Plot for Channel = 39

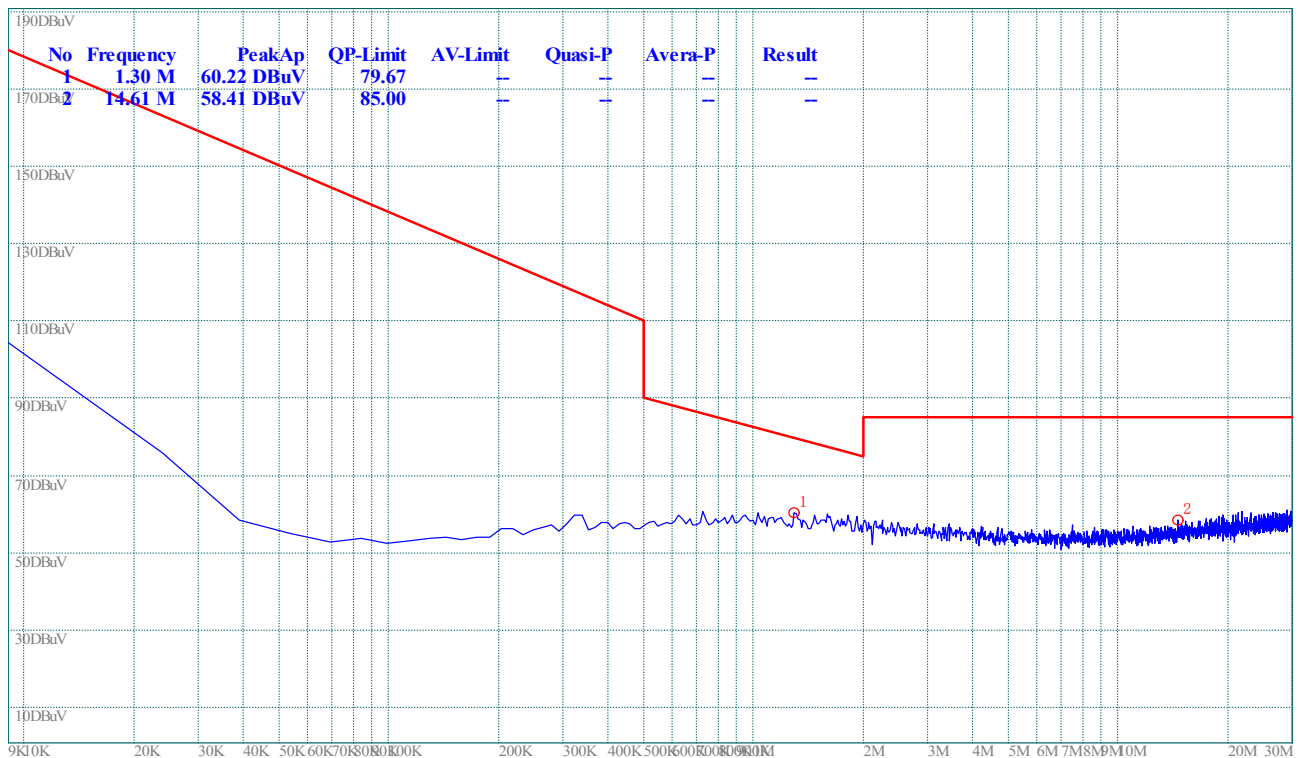


(Plot B.0: 9kHz to 30MHz @ 8-DPSK, channel 39)

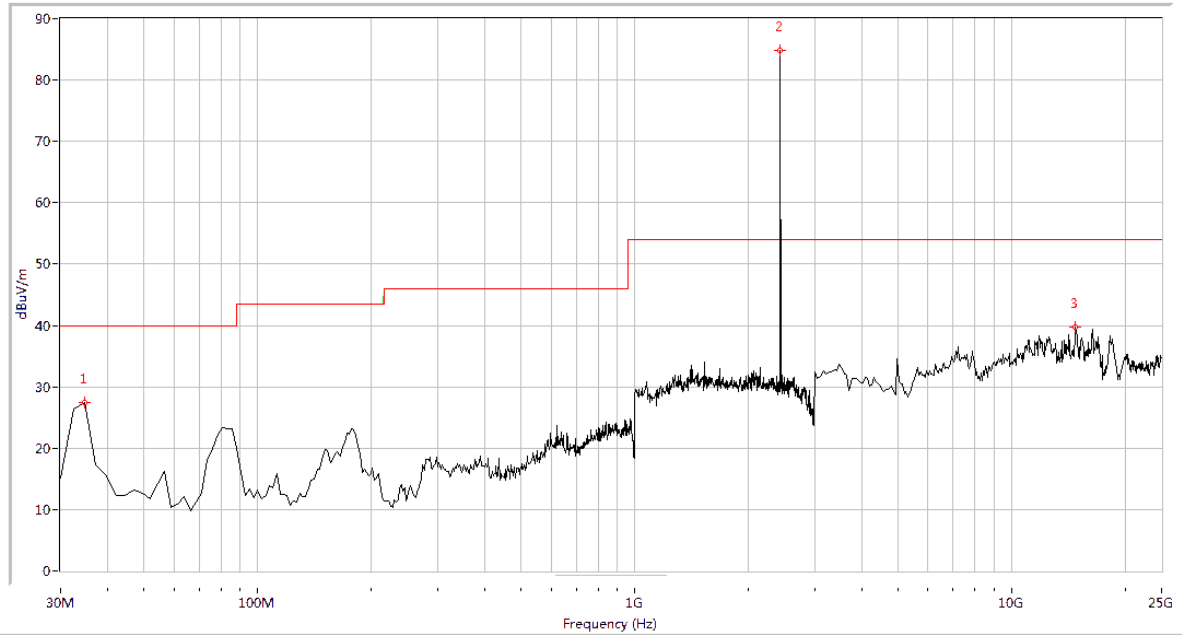

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 34.838     | 27.43 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2441.000   | 84.89 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 14795.511  | 39.81 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |


(Plot B.1: 30MHz to 25GHz, Antenna Horizontal @ 8-DPSK, channel 39)

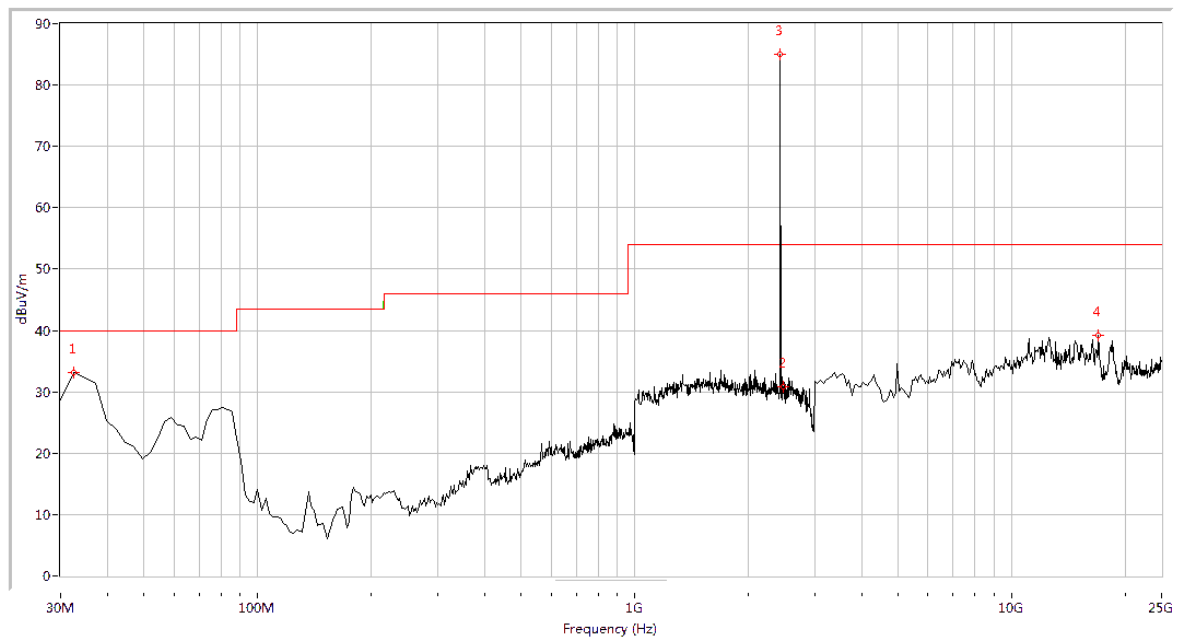


| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 32.419     | 33.22 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2476.309   | 30.75 | N.A | N.A | 54.0     | N.A      | 54.0     | Vertical | PASS    |
| 2441.000   | 84.96 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 16990.025  | 39.14 | N.A | N.A | 54.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot B.2: 30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 39)

# Plot for Channel = 78

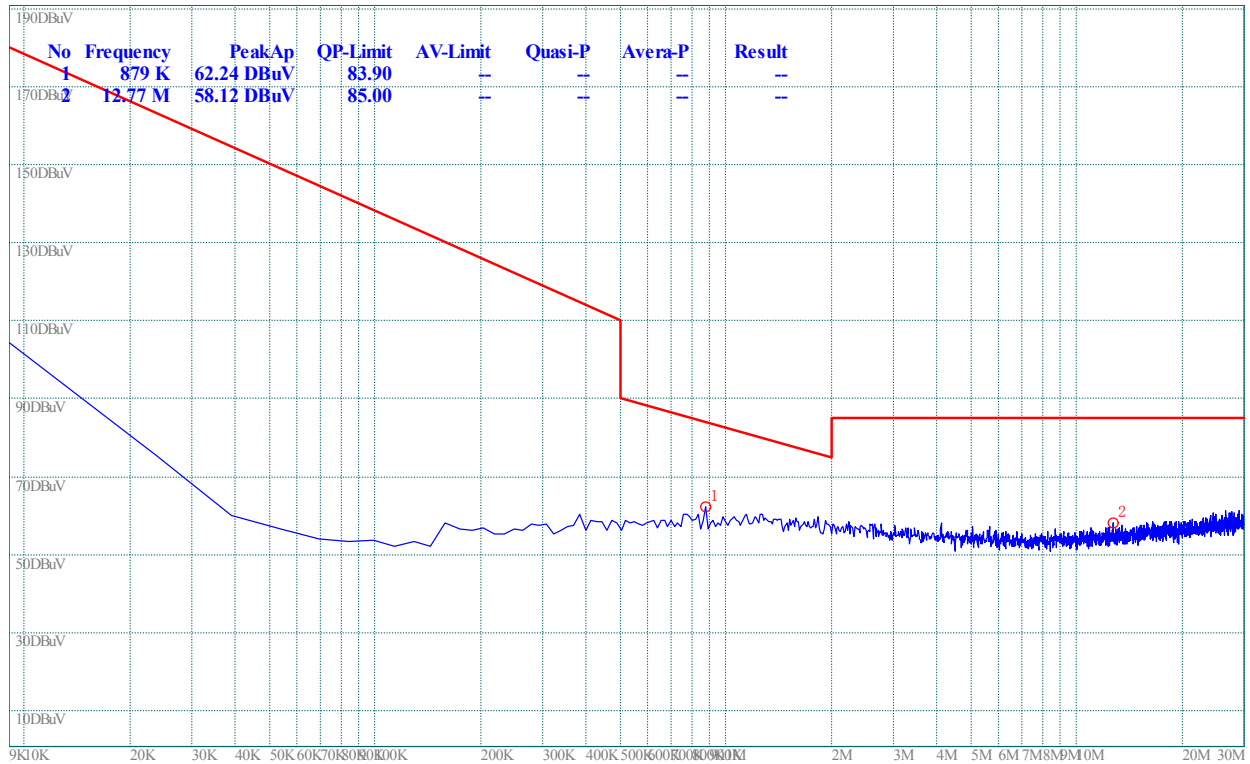


(Plot C.0: 9kHz to 30MHz @ 8-DPSK, channel 78)

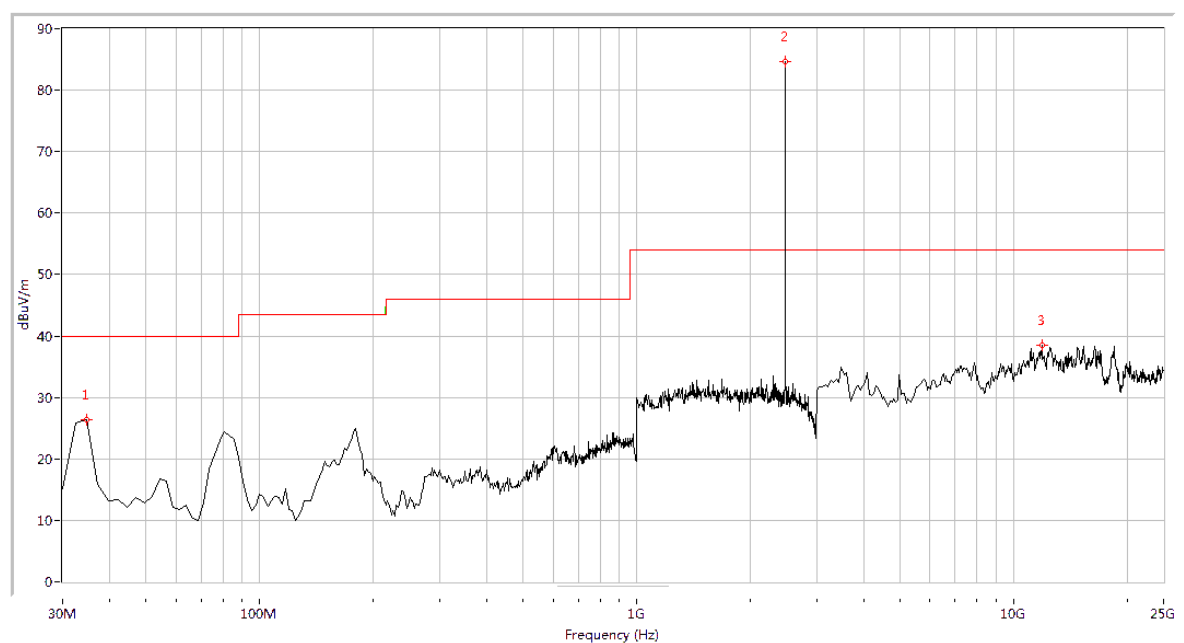

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 34.838     | 26.39 | N.A | N.A | N.A      | 40.0     | N.A      | Horizontal | PASS    |
| 2480.000   | 84.60 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 11887.781  | 38.47 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Plot C.1: 30MHz to 25GHz, Antenna Horizontal @ 8-DPSK, channel 78)

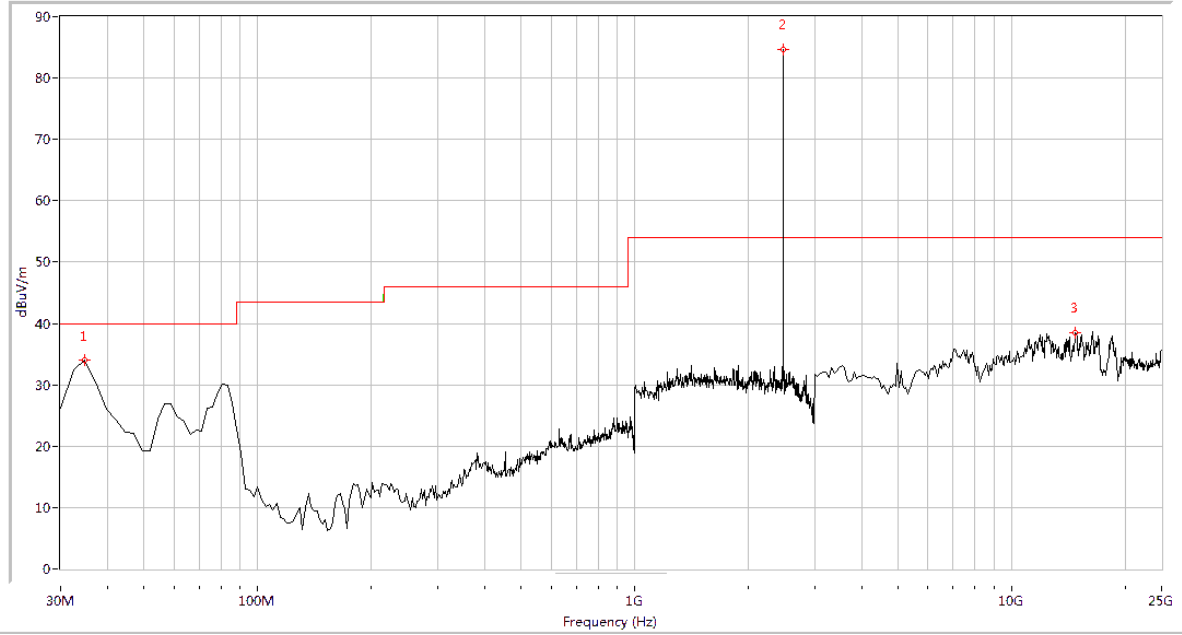

| Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838     | 33.98 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 2480.000   | 84.58 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 14795.511  | 38.55 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot C.2: 30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 78)



## 2.11. RF exposure evaluation

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

According to 447498 D01 General RF Exposure Guidance v05, exclusion threshold values at selected frequencies and distances table as following.

| MHz  | 5   | 10  | 15  | 20  | 25  | mm                                      |
|------|-----|-----|-----|-----|-----|-----------------------------------------|
| 150  | 39  | 77  | 116 | 155 | 194 | SAR Test<br>Exclusion<br>Threshold (mW) |
| 300  | 27  | 55  | 82  | 110 | 137 |                                         |
| 450  | 22  | 45  | 67  | 89  | 112 |                                         |
| 835  | 16  | 33  | 49  | 66  | 82  |                                         |
| 900  | 16  | 32  | 47  | 63  | 79  |                                         |
| 1500 | 12  | 24  | 37  | 49  | 61  |                                         |
| 1900 | 11  | 22  | 33  | 44  | 54  |                                         |
| 2450 | 10  | 19  | 29  | 38  | 48  |                                         |
| 3600 | 8   | 16  | 24  | 32  | 40  |                                         |
| 5200 | 7   | 13  | 20  | 26  | 33  |                                         |
| 5400 | 6   | 13  | 19  | 26  | 32  |                                         |
| 5800 | 6   | 12  | 19  | 25  | 31  |                                         |
|      |     |     |     |     |     |                                         |
| MHz  | 30  | 35  | 40  | 45  | 50  | mm                                      |
| 150  | 232 | 271 | 310 | 349 | 387 | SAR Test<br>Exclusion<br>Threshold (mW) |
| 300  | 164 | 192 | 219 | 246 | 274 |                                         |
| 450  | 134 | 157 | 179 | 201 | 224 |                                         |
| 835  | 98  | 115 | 131 | 148 | 164 |                                         |
| 900  | 95  | 111 | 126 | 142 | 158 |                                         |
| 1500 | 73  | 86  | 98  | 110 | 122 |                                         |
| 1900 | 65  | 76  | 87  | 98  | 109 |                                         |
| 2450 | 57  | 67  | 77  | 86  | 96  |                                         |
| 3600 | 47  | 55  | 63  | 71  | 79  |                                         |
| 5200 | 39  | 46  | 53  | 59  | 66  |                                         |
| 5400 | 39  | 45  | 52  | 58  | 65  |                                         |
| 5800 | 37  | 44  | 50  | 56  | 62  |                                         |

Routine SAR evaluation refers to the specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evolution is not required, the portable transmitters with output power greater than the applicable low threshold SAR evolution to qualify for TCB approval.

### Result:

This is portable device and the Max conducted peak output power is 3.639dBm, the maximum gain of antenna is 2.5dBi, the maximum output power is 6.139dBm (4.111mW). which is lower than the exclusion threshold 10mW, at frequency 2450MHz, and distance is 5mm.

The SAR measurement is not required.

**\*\* END OF REPORT \*\***