

Tested By:Hong, Report No.:06130911

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

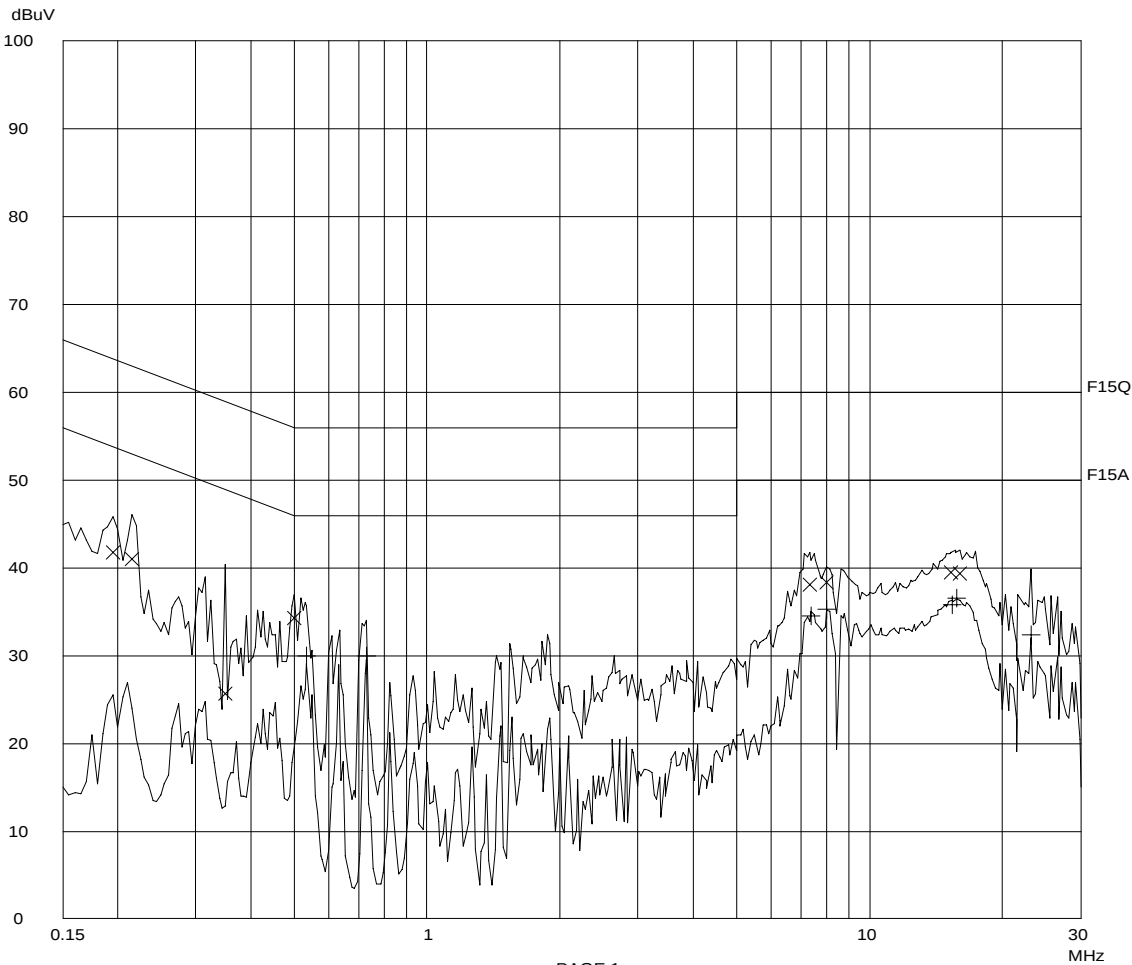

Report No.: 06130911
Talk Mode
PC's AC Port

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency QP Level QP Limit

MHz dBuV dBuV

0.19500	41.7	63.9
0.21500	41.0	63.0
0.35000	25.7	59.0
0.50000	34.2	56.0
7.32500	38.0	60.0
8.00000	38.4	60.0
15.33000	39.5	60.0
16.00000	39.3	60.0

Frequency AV Level AV Limit

MHz dBuV dBuV

0.53500	29.9	46.0
0.73000	29.9	46.0
7.39000	34.4	50.0
8.00000	35.2	50.0
15.39000	35.8	50.0
15.75500	36.5	50.0
23.13000	32.4	50.0

* limit




Tested By:Hong, Report No.:06130911

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

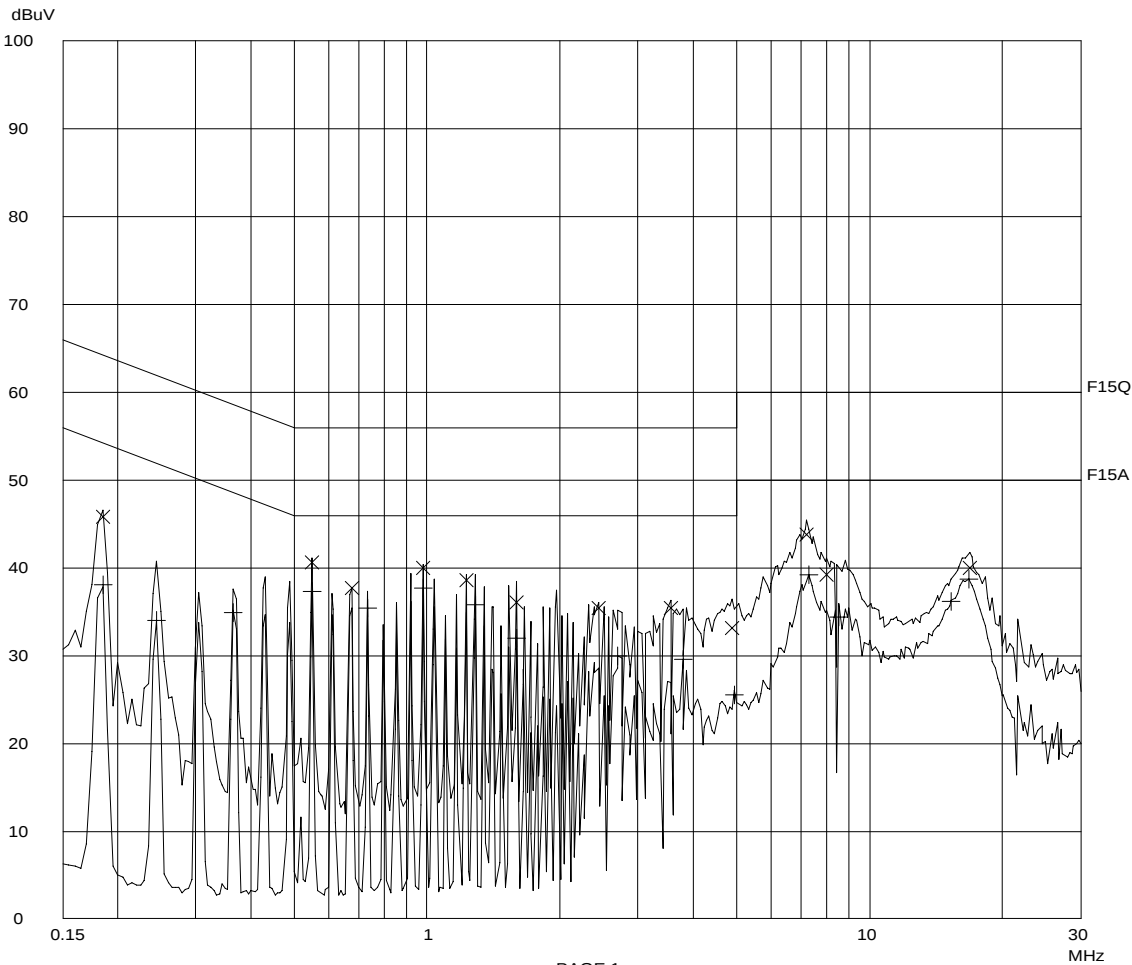

Report No.: 06130911
Talk Mode
EUT's AC Port

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.18500	45.7	64.3
0.55000	40.5	56.0
0.67500	37.6	56.0
0.98000	40.0	56.0
1.22500	38.6	56.0
1.59000	36.0	56.0
2.45000	35.4	56.0
3.55000	35.3	56.0
4.89500	33.0	56.0
7.22500	43.8	60.0
8.02000	39.2	60.0
16.83500	40.0	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.18500	38.0	54.3
0.24500	33.9	51.9
0.36500	34.9	48.6
0.55000	37.3	46.0
0.73500	35.4	46.0
0.98000	37.7	46.0
1.28500	35.8	46.0
1.59000	32.0	46.0
2.69500	29.9	46.0
3.79500	29.5	46.0
4.96000	25.5	46.0
7.28500	39.1	50.0
8.51000	34.4	50.0
15.30500	36.2	50.0
16.77500	38.6	50.0

* limit

Report No.: 06130911
 Ringing Mode
 EUT's AC Port "L"

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1	9k	30M EW0699
12	9k	30M	EW0192

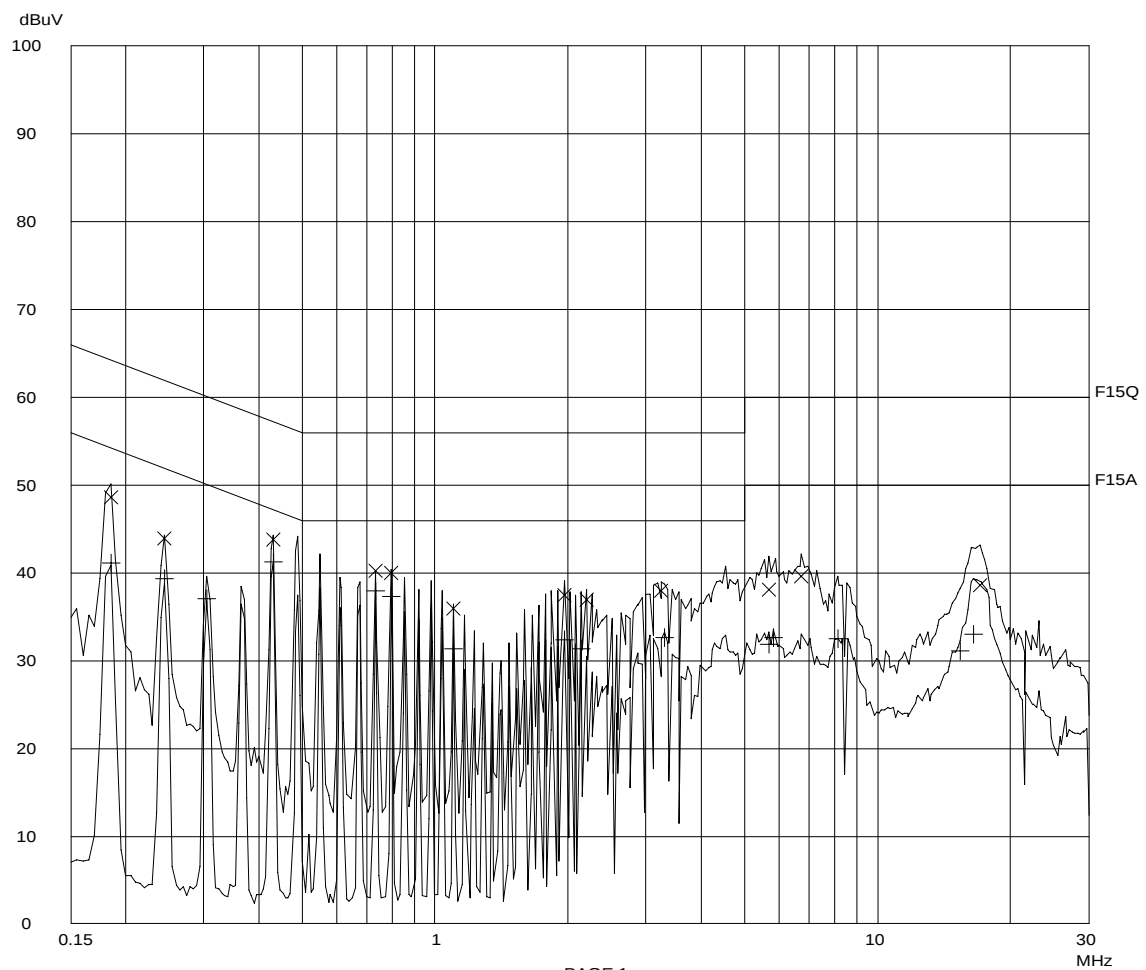

Report No.: 06130911
 Ringing Mode
 EUT's AC Port "L"

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.18500	48.6	64.3
0.24500	43.9	61.9
0.43000	43.7	57.3
0.73500	40.2	56.0
0.79500	40.0	56.0
1.10000	35.8	56.0
1.96000	37.4	56.0
2.20500	36.9	56.0
3.24500	37.9	56.0
5.69500	38.1	60.0
6.73500	39.5	60.0
17.07500	38.5	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.18500	41.0	54.3
0.24500	39.3	51.9
0.30500	37.0	50.1
0.43000	41.3	47.3
0.73500	38.0	46.0
0.79500	37.3	46.0
1.10000	31.3	46.0
1.96000	32.4	46.0
2.14000	31.3	46.0
3.30500	32.6	46.0
5.69500	31.9	50.0
5.81500	32.6	50.0
8.14000	32.5	50.0
15.42500	31.0	50.0
16.52500	33.0	50.0

* limit

Report No.: 06130911
 Ringing Mode
 EUT's AC Port "N"

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

2	1	9k	30M	EW0699
	12	9k	30M	EW0192

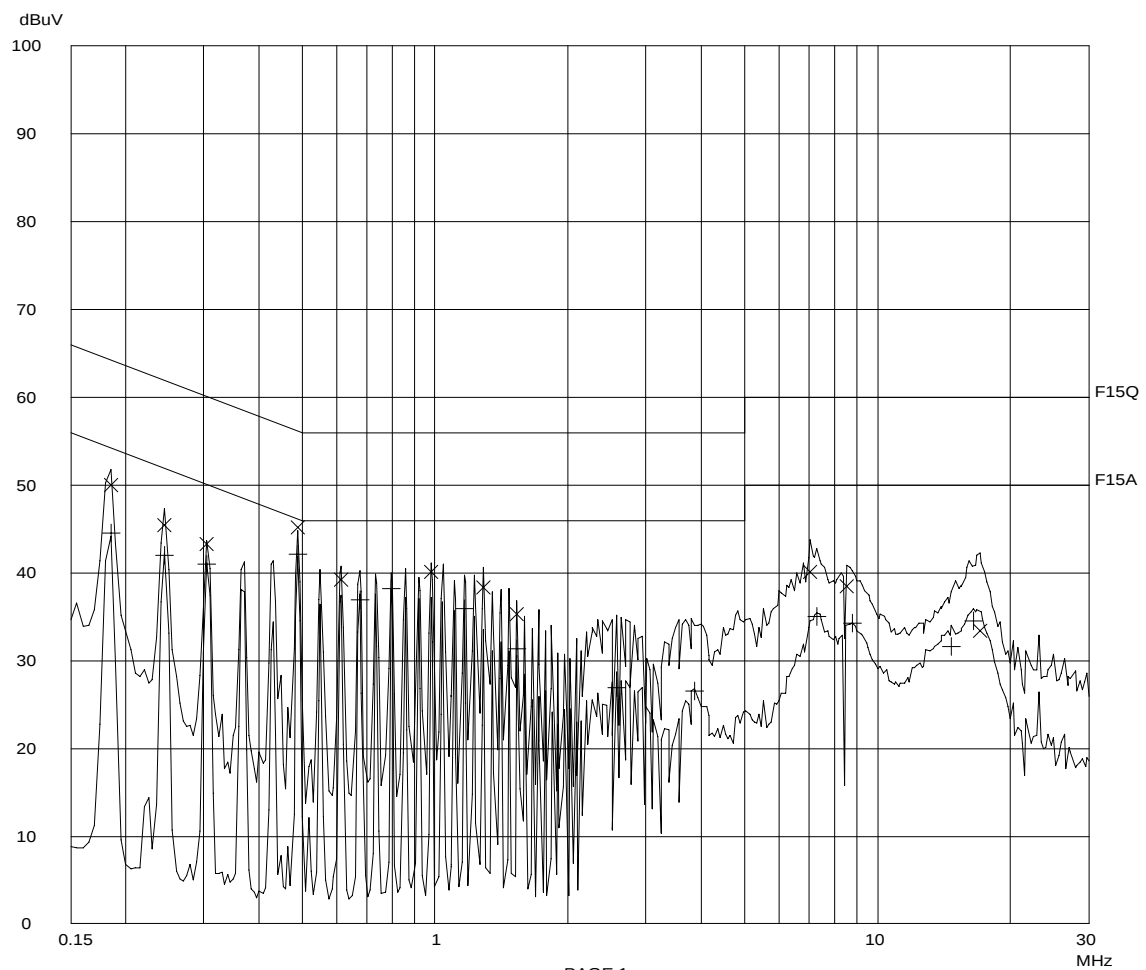

PAGE 1

Ctrl No.: N/A

Report No.: 06130911
 Ringing Mode
 EUT's AC Port "N"

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.18500	49.9	64.3
0.24500	45.4	61.9
0.30500	43.2	60.1
0.49000	45.1	56.2
0.61500	39.2	56.0
0.98000	40.1	56.0
1.28500	38.3	56.0
1.53000	35.3	56.0
7.04500	40.1	60.0
8.51500	38.4	60.0
17.09000	33.4	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.18500	44.4	54.3
0.24500	42.0	51.9
0.30500	40.9	50.1
0.49000	42.0	46.2
0.67500	36.9	46.0
0.79500	38.1	46.0
1.16500	35.9	46.0
1.53000	31.3	46.0
2.57500	26.9	46.0
3.86000	26.5	46.0
7.29000	35.0	50.0
8.76000	34.3	50.0
14.70000	31.5	50.0
16.47500	34.5	50.0

* limit


Tested By:Hong, Report No.:06130911

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

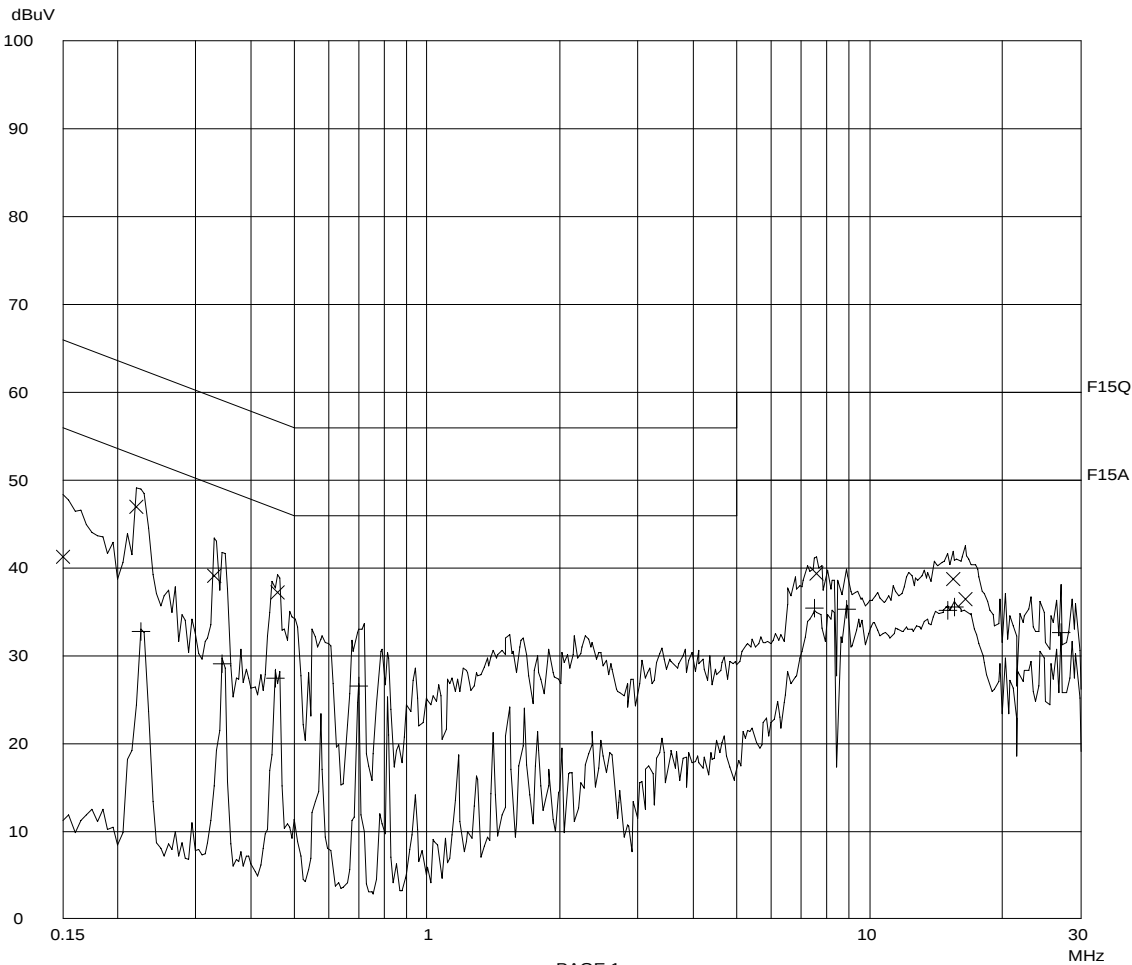

Report No.: 06130911
VoIP Online Mode
PC's AC Port

Tested By: Hong, Report No.: 06130911

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency QP Level QP Limit

MHz dBuV dBuV

0.15000	41.3	66.0
0.22000	46.9	62.9
0.33000	39.1	59.5
0.46000	37.2	56.7
7.57500	39.3	60.0
15.46000	38.6	60.0
16.44000	36.4	60.0

Frequency AV Level AV Limit

MHz dBuV dBuV

0.22500	32.8	52.7
0.34500	29.0	49.1
0.45500	27.4	46.8
0.70000	26.6	46.0
7.51500	35.3	50.0
8.86000	35.3	50.0
15.03000	35.2	50.0
15.52000	35.5	50.0
27.16000	32.6	50.0

* limit