

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Side_0mm_Ch6;Ant 1+2

Communication System: 802.11b ; Frequency: 2437.000 MHz

Medium: HSL_600-7200_251219 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(6.6, 6.84, 6.67); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2025-09-09
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238-; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (100.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.069 W/kg; SAR (10g) = 0.036 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.078 W/kg; SAR (8g) = 0.042 W/kg; SAR (10g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.065 W/kg; SAR (8g) = 0.038 W/kg; SAR (10g) = 0.035 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

TSL Correction: Positive only

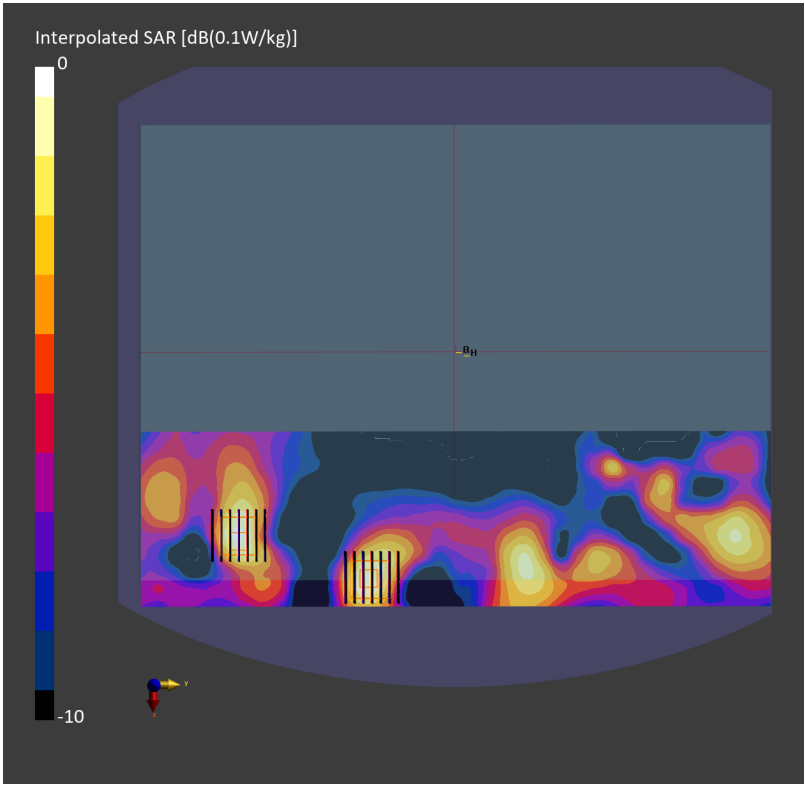

#02_WLAN5GHz_802.11n-HT40 MCS0_Bottom Side_0mm_Ch54;Ant 1+2

Communication System: 802.11n; Frequency: 5270.000 MHz

Medium: HSL_600-7200_251220 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.46$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(5.34, 5.53, 5.39); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2025-09-09
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10117-CAE

Area Scan (100.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.039 W/kg; SAR (10g) = 0.015 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.030 W/kg; SAR (8g) = 0.012 W/kg; SAR (10g) = 0.008 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 68.6 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.10 dB

SAR (1g) = 0.017 W/kg; SAR (8g) = 0.005 W/kg; SAR (10g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.5 %

TSL Correction: Positive only

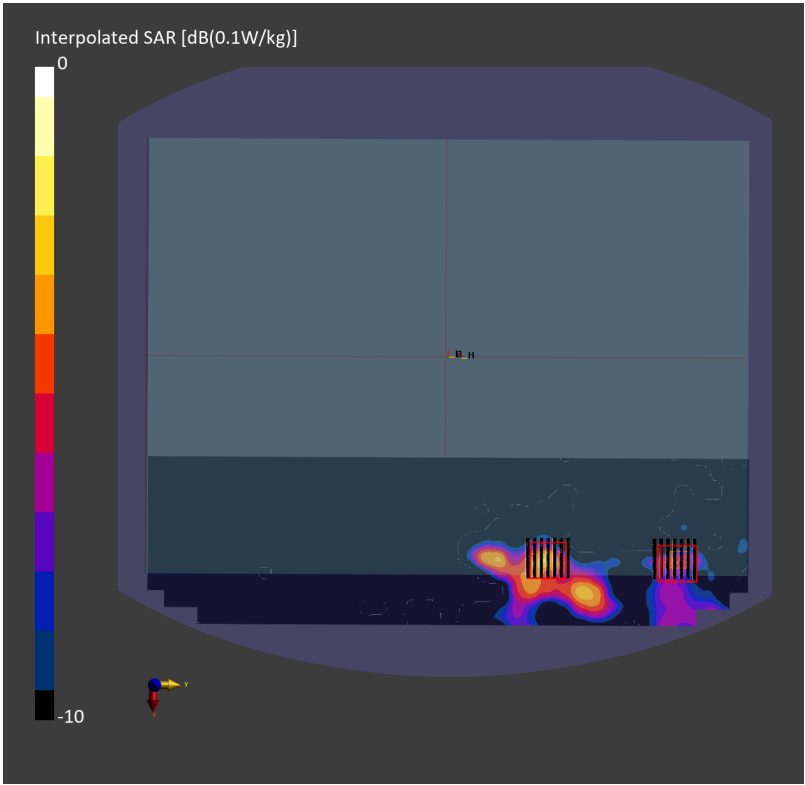

#03_WLAN5GHz_802.11n-HT40 MCS0_Bottom Side_0mm_Ch110;Ant 1+2

Communication System: 802.11n; Frequency: 5550.000 MHz

Medium: HSL_600-7200_2512220 Medium parameters used: $f=5550.000$ MHz; $\sigma=4.76$ S/m; $\epsilon_r=35.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.85, 5.02, 4.9); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2025-09-09
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10117-CAE

Area Scan (100.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.035 W/kg; SAR (10g) = 0.015 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.027 W/kg; SAR (8g) = 0.006 W/kg; SAR (10g) = 0.008 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.10 dB

SAR (1g) = 0.013 W/kg; SAR (8g) = 0.002 W/kg; SAR (10g) = 0.001 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

TSL Correction: Positive only

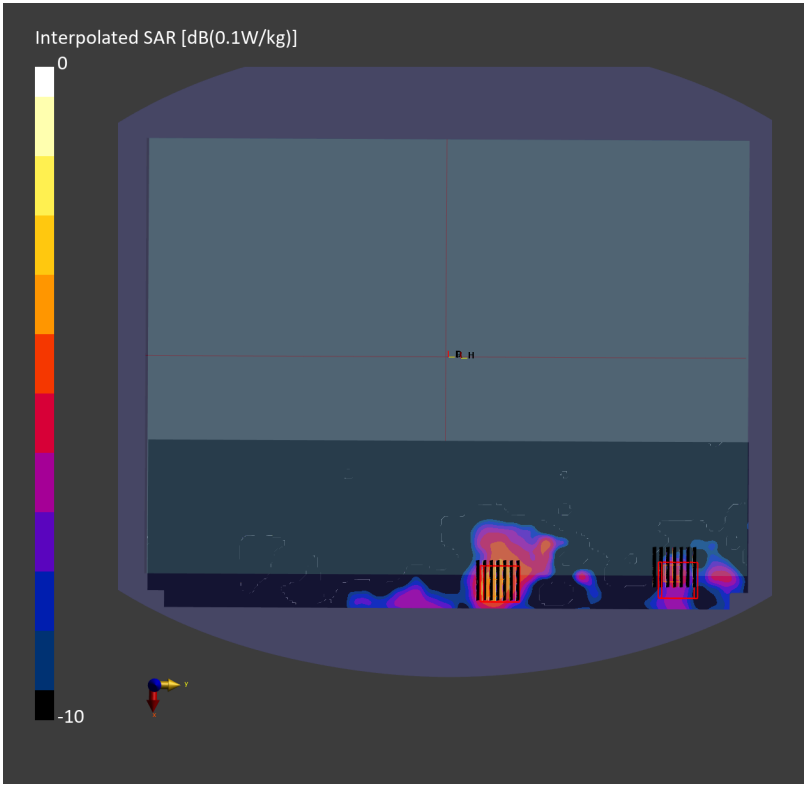

#04_WLAN5GHz_802.11n-HT40 MCS0_Bottom Side_0mm_Ch159;Ant 1+2

Communication System: 802.11n; Frequency: 5795.000 MHz

Medium: HSL_600-7200_251221 Medium parameters used: $f = 5795.000$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.82, 4.99, 4.87); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2025-09-09
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10117-CAE

Area Scan (100.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.068 W/kg; SAR (10g) = 0.028 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.12 dB

SAR (1g) = 0.060 W/kg; SAR (8g) = 0.026 W/kg; SAR (10g) = 0.021 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.7 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 0.022 W/kg; SAR (8g) = 0.005 W/kg; SAR (10g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.4 %

TSL Correction: Positive only

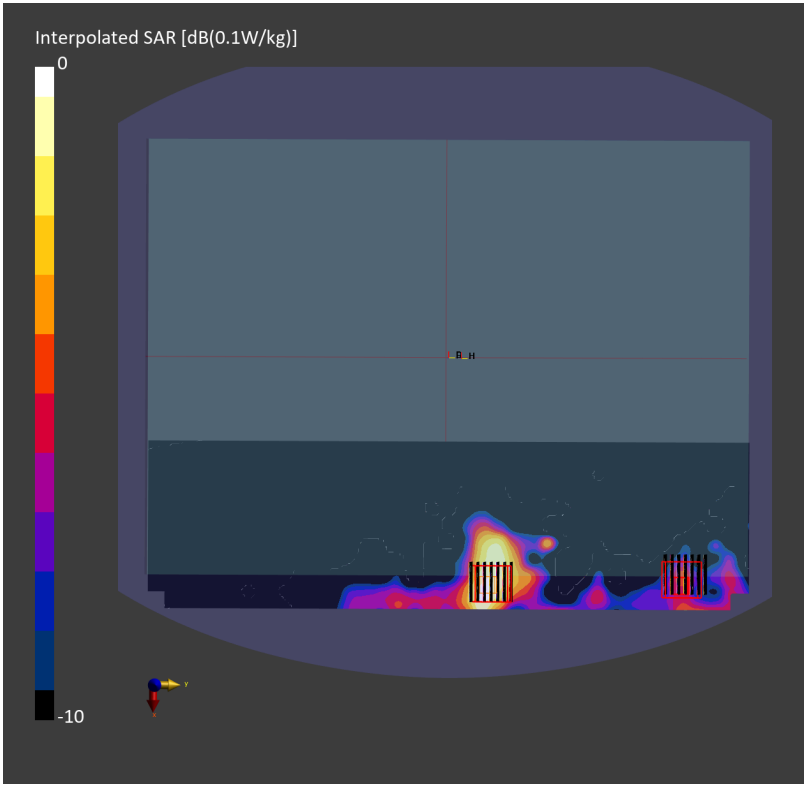

#05_WLAN5GHz_802.11n-HT40 MCS0_Bottom Side_0mm_Ch167;Ant 1+2

Communication System: 802.11n; Frequency: 5835.000 MHz

Medium: HSL_600-7200_251221 Medium parameters used: $f = 5835.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.82, 4.99, 4.87); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2025-09-09
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10117-CAE

Area Scan (100.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.054 W/kg; SAR (10g) = 0.021 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 0.038 W/kg; SAR (8g) = 0.015 W/kg; SAR (10g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.1 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.14 dB

SAR (1g) = 0.019 W/kg; SAR (8g) = 0.005 W/kg; SAR (10g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 68.1 %

TSL Correction: Positive only

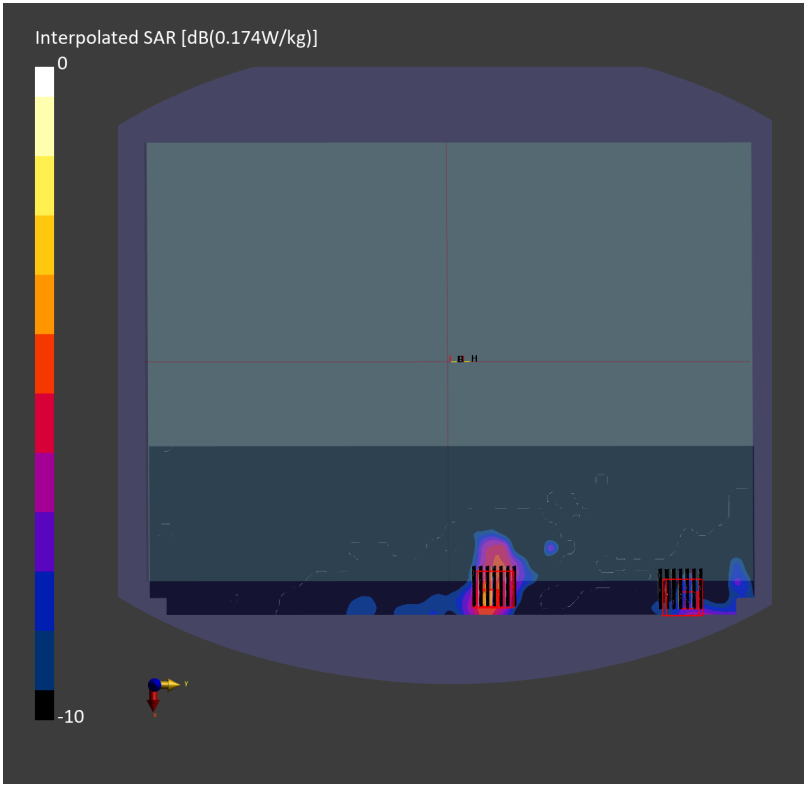

#06_Bluetooth_1Mbps_Bottom Side_0mm_Ch0;Ant 2

Communication System: Bluetooth; Frequency: 2402.000 MHz

Medium: HSL_600-7200_251219 Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(6.6, 6.84, 6.67); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn854; Calibrated: 2025-09-09
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.003 W/kg; SAR (10g) = 0.001 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.14 dB

SAR (1g) = 0.001 W/kg; SAR (8g) = 0.001 W/kg; SAR (10g) = 0.001 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

