

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Side_8mm_Ch6

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz

Medium: HSL_600~7200_260804 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.859$ S/m; $\epsilon_r = 39.78$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.55, 6.81, 6.95) @ 2437 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.975 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.82 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.615 W/kg; SAR(10 g) = 0.291 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.1%

Maximum value of SAR (measured) = 1.09 W/kg

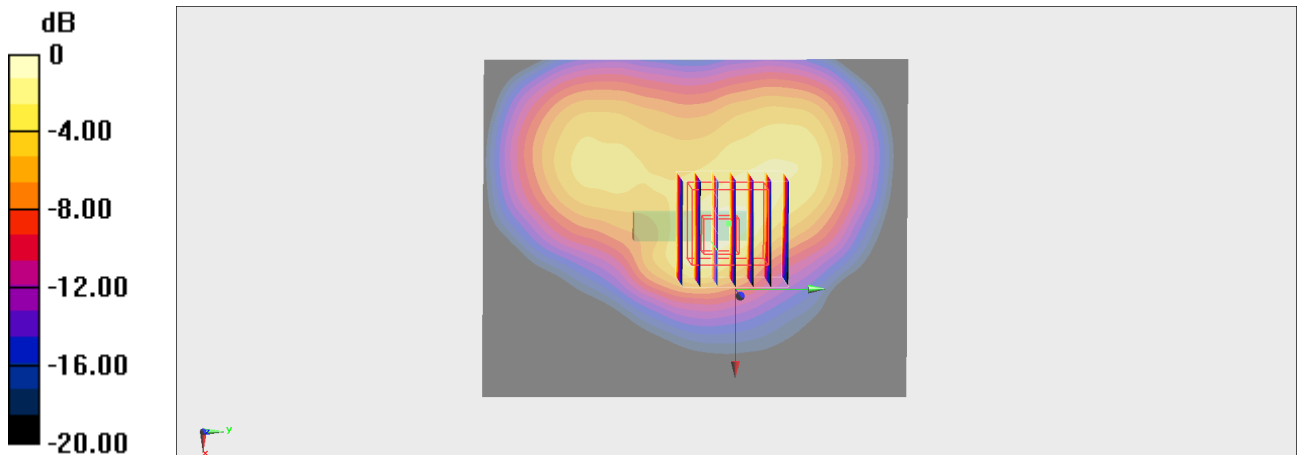

0 dB = 1.09 W/kg = 0.37 dBW/kg

#02_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_8mm_Ch58

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5290 MHz

Medium: HSL_600~7200_260804 Medium parameters used : $f = 5290$ MHz; $\sigma = 4.677$ S/m; $\epsilon_r = 34.651$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.94, 5.14, 5.24) @ 5290 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.45 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.97 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.179 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 1.41 W/kg

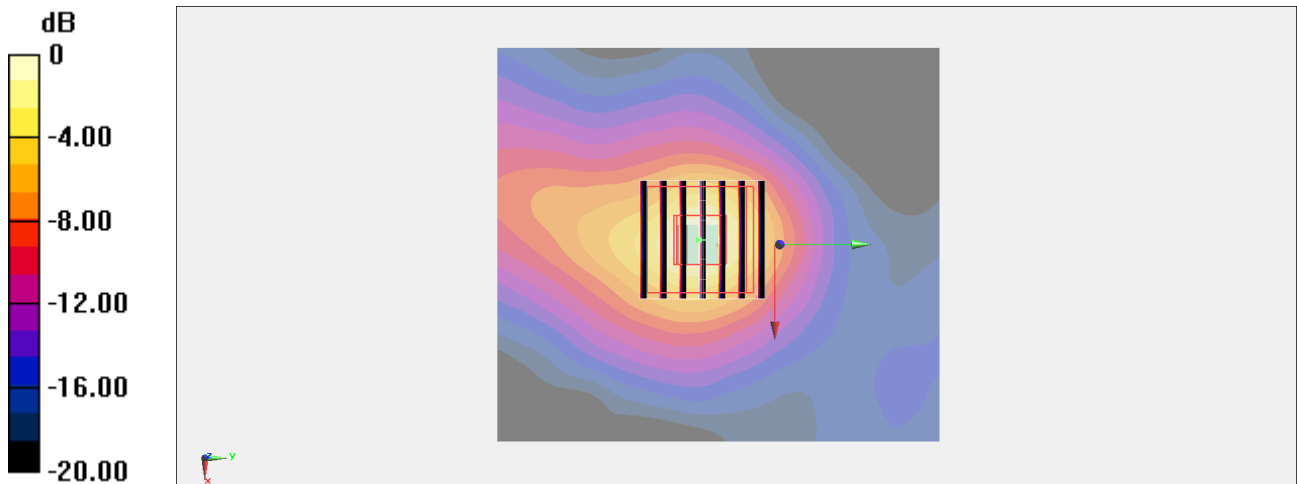

0 dB = 1.41 W/kg = 1.48 dBW/kg

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_8mm_Ch122

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5610 MHz

Medium: HSL_600~7200_260804 Medium parameters used : $f = 5610$ MHz; $\sigma = 5.009$ S/m; $\epsilon_r = 34.037$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.51, 4.68, 4.78) @ 5610 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.47 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.94 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.175 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 1.57 W/kg

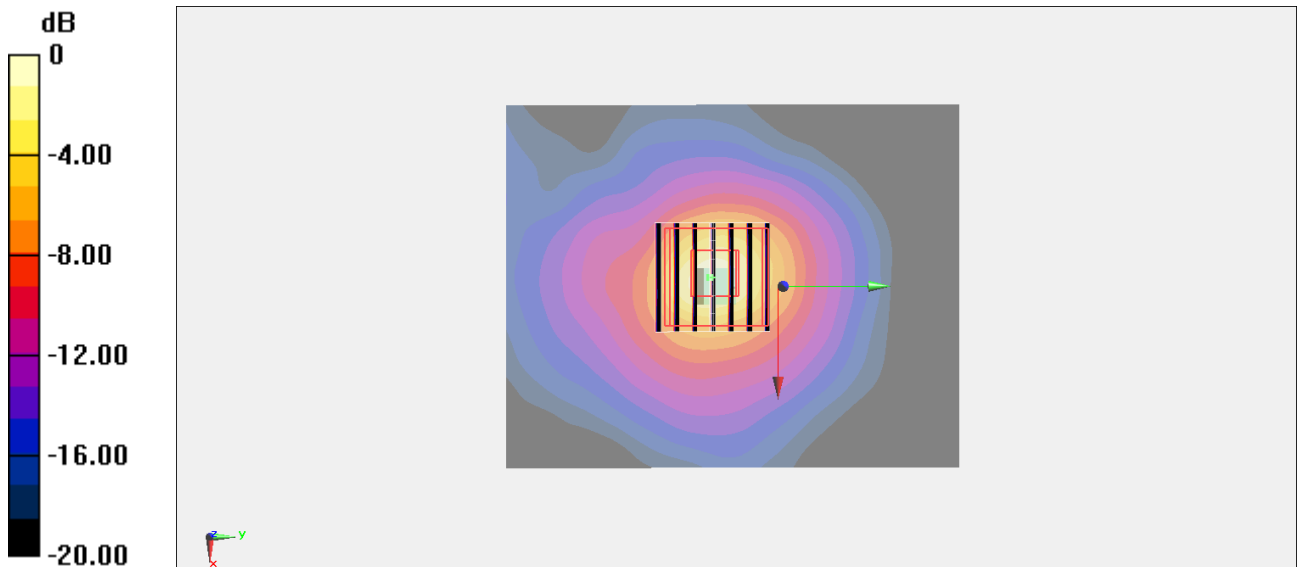

0 dB = 1.57 W/kg = 1.95 dBW/kg

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_8mm_Ch155

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5775 MHz

Medium: HSL_600~7200_260804 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.237$ S/m; $\epsilon_r = 33.784$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.42, 4.59, 4.69) @ 5775 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.33 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.173 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 1.54 W/kg

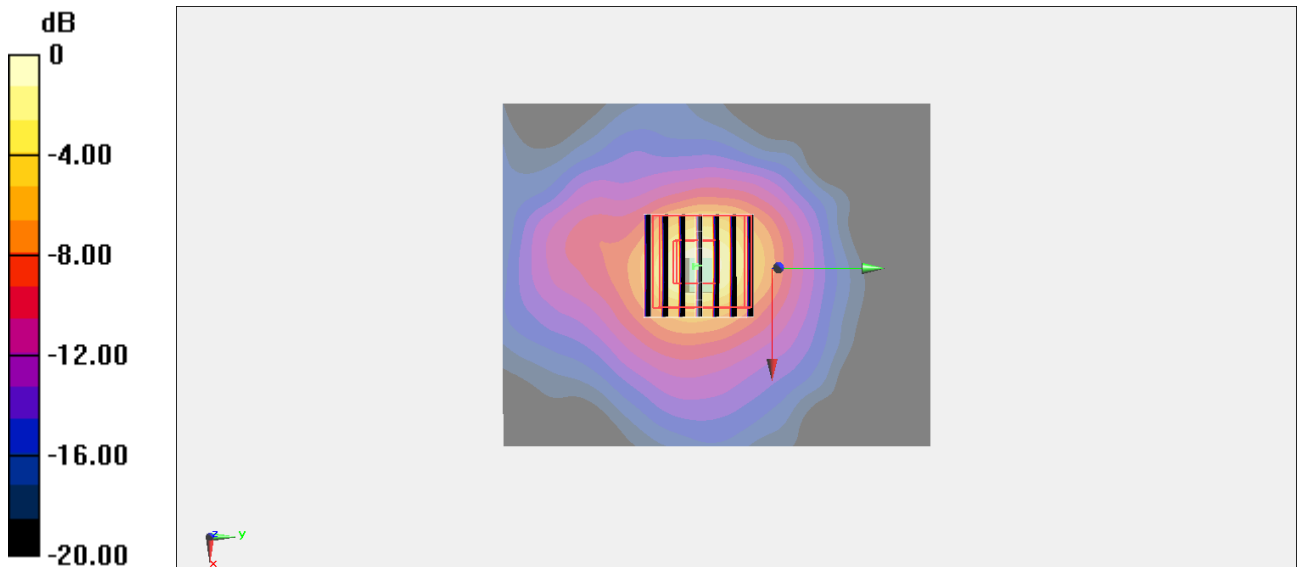

0 dB = 1.54 W/kg = 1.88 dBW/kg

#05_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_8mm_Ch171

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5855 MHz

Medium: HSL_600~7200_260804 Medium parameters used: $f = 5855$ MHz; $\sigma = 5.306$ S/m; $\epsilon_r = 33.567$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.42, 4.59, 4.69) @ 5855 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.45 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.15 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.166 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 1.50 W/kg

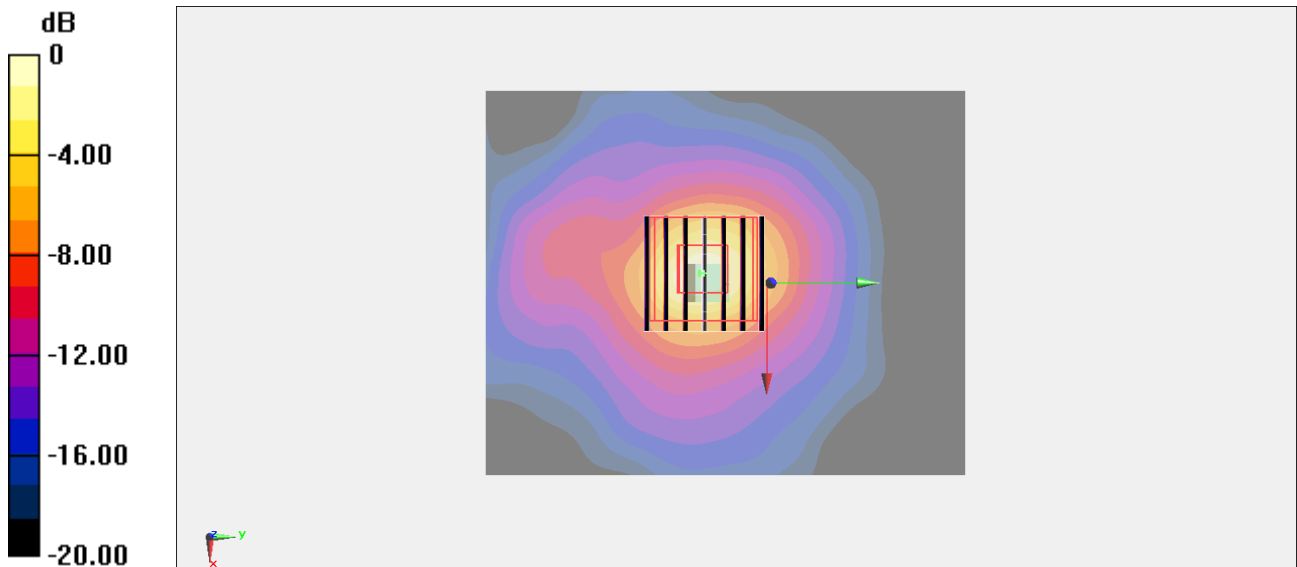

0 dB = 1.50 W/kg = 1.75 dBW/kg

#06_Bluetooth_1Mbps_Bottom Side_8mm_Ch39

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth ; Frequency: 2441 MHz

Medium: HSL_600~7200_260804 Medium parameters used : $f = 2441$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 39.77$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.55, 6.81, 6.95) @ 2441 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.435 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.99 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.130 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 0.442 W/kg

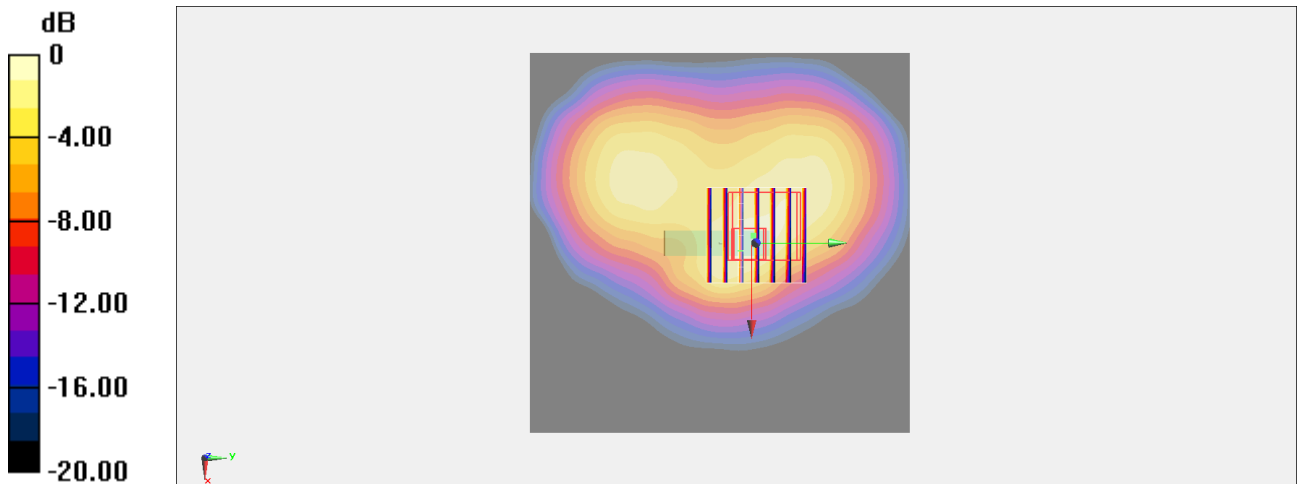

0 dB = 0.442 W/kg = -3.55 dBW/kg