

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Side_11mm_Ch6

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz

Medium: HSL_600~7200_260804 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.859$ S/m; $\epsilon_r = 39.78$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.55, 6.81, 6.95) @ 2437 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.962 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.88 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.342 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.2%

Maximum value of SAR (measured) = 0.960 W/kg

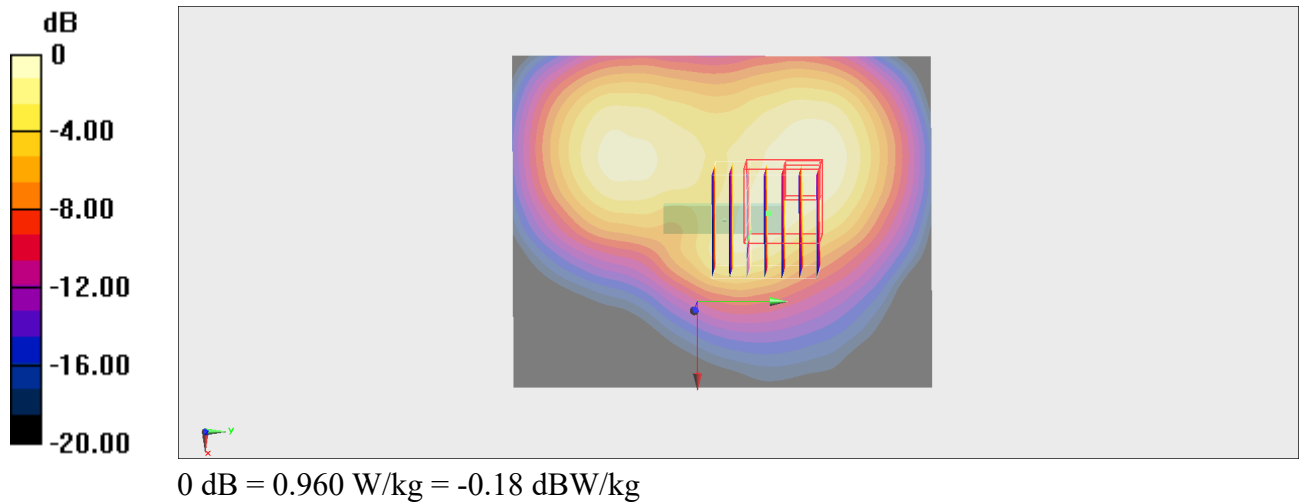

#02_WLAN5GHz_802.11n-HT40 MCS0_Left Side_11mm_Ch54

Communication System: UID 10599 - AAD, IEEE 802.11n; Frequency: 5270 MHz

Medium: HSL_600~7200_260804 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.639$ S/m; $\epsilon_r = 34.706$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.94, 5.14, 5.24) @ 5270 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.51 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.82 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.229 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 1.50 W/kg

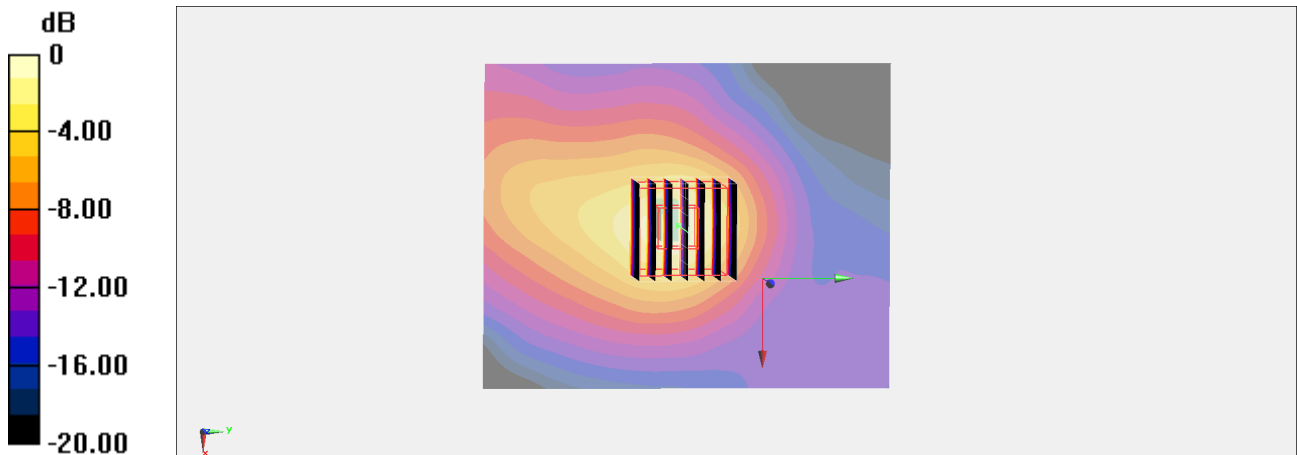

0 dB = 1.50 W/kg = 1.76 dBW/kg

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_11mm_Ch122

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5610 MHz

Medium: HSL_600~7200_260804 Medium parameters used : $f = 5610$ MHz; $\sigma = 5.009$ S/m; $\epsilon_r = 34.037$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.51, 4.68, 4.78) @ 5610 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.64 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 18.11 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 3.31 W/kg

SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.227 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 1.67 W/kg

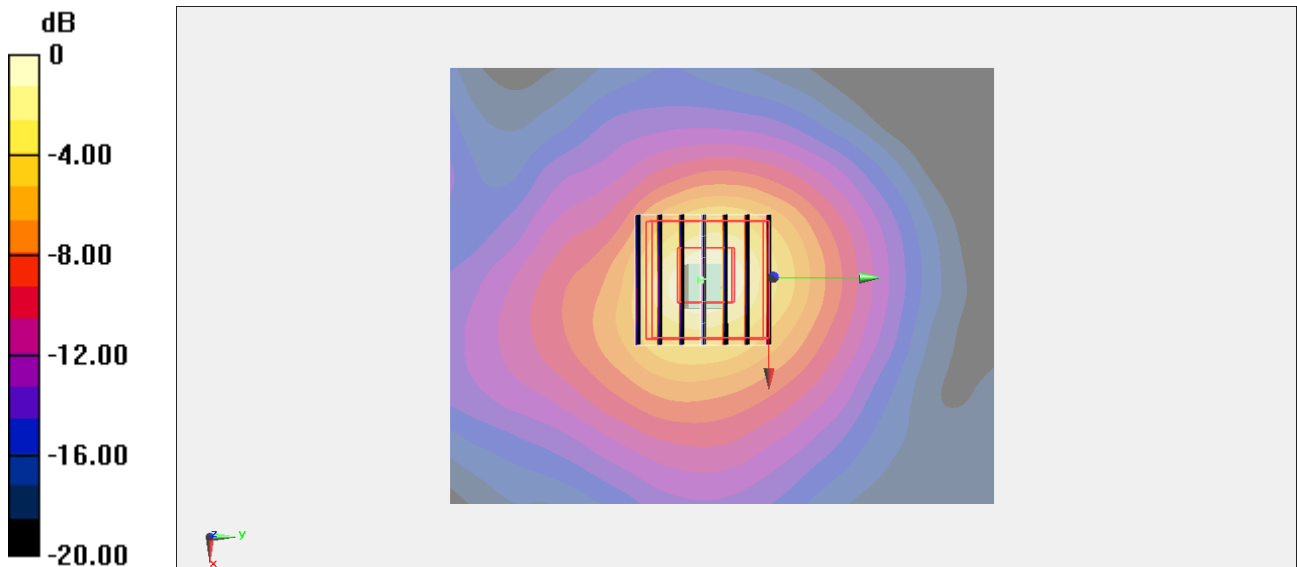

0 dB = 1.67 W/kg = 2.24 dBW/kg

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_11mm_Ch155

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5775 MHz

Medium: HSL_600~7200_260804 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.237$ S/m; $\epsilon_r = 33.784$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.42, 4.59, 4.69) @ 5775 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.92 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.211 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 1.54 W/kg

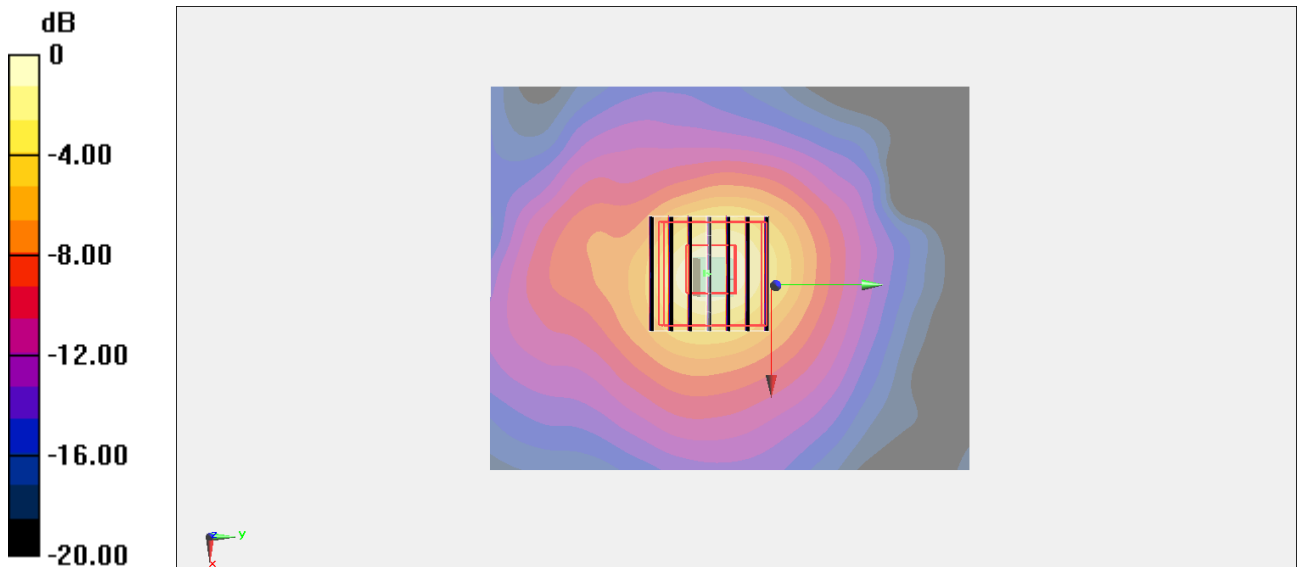

0 dB = 1.54 W/kg = 1.88 dBW/kg

#05_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_11mm_Ch171

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5855 MHz

Medium: HSL_600~7200_260804 Medium parameters used: $f = 5855$ MHz; $\sigma = 5.306$ S/m; $\epsilon_r = 33.567$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.42, 4.59, 4.69) @ 5855 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.22 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.198 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 1.46 W/kg

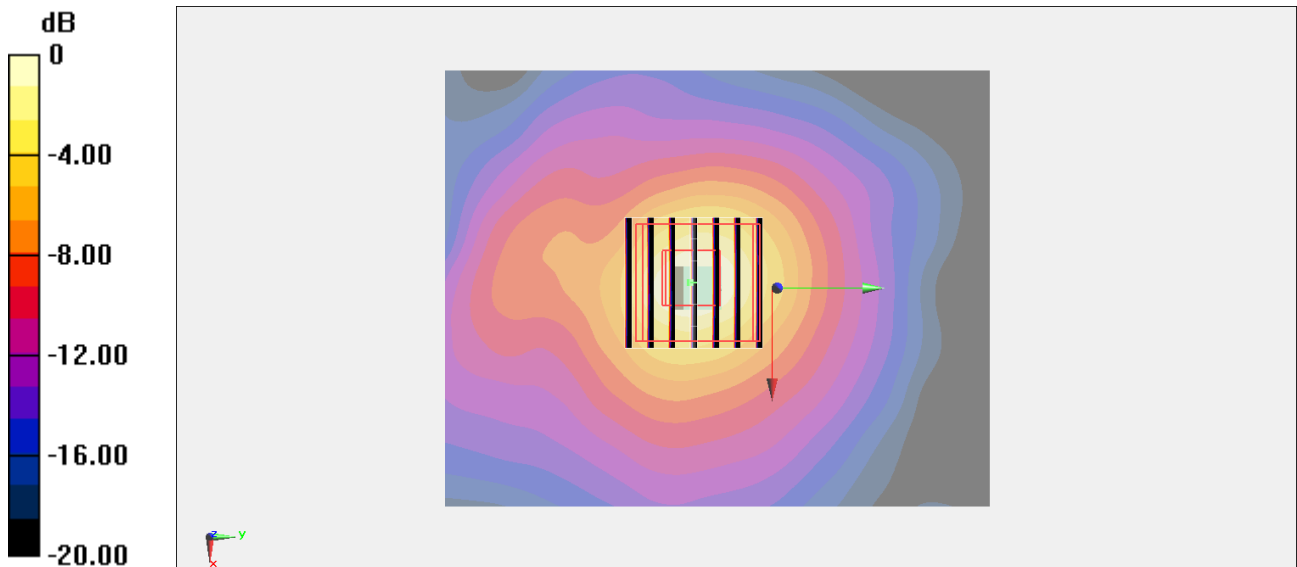

0 dB = 1.46 W/kg = 1.63 dBW/kg

#06_Bluetooth_1Mbps_Bottom Side_11mm_Ch39

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth ; Frequency: 2441 MHz

Medium: HSL_600~7200_260804 Medium parameters used : $f = 2441$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 39.77$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.55, 6.81, 6.95) @ 2441 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.238 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.80 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.084 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 0.231 W/kg

