

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Side_0mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412.000 MHz

Medium: HSL_600-7200_260318 Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.55, 6.81, 6.95); Calibrated: 2026-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2026-02-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.507 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 1.12 W/kg; SAR (8g) = 0.598 W/kg; SAR (10g) = 0.548 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

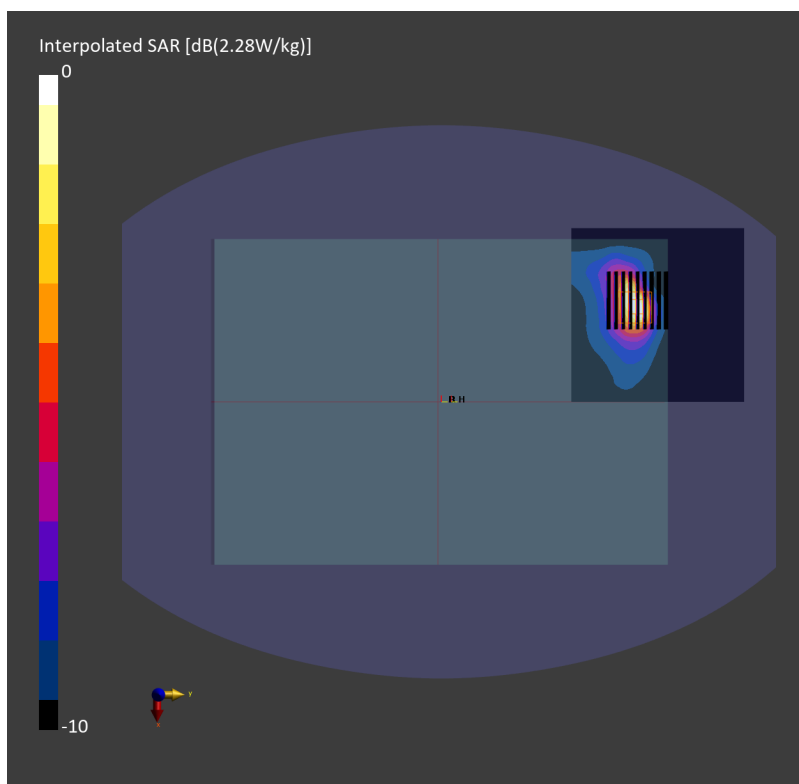

#02_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch58

Communication System: IEEE 802.11ac WiFi; Frequency: 5290.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.58$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.94, 5.14, 5.24); Calibrated: 2026-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2026-02-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.669 W/kg; SAR (10g) = 0.222 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 0.844 W/kg; SAR (8g) = 0.296 W/kg; SAR (10g) = 0.255 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 68.0 %

TSL Correction: Positive only

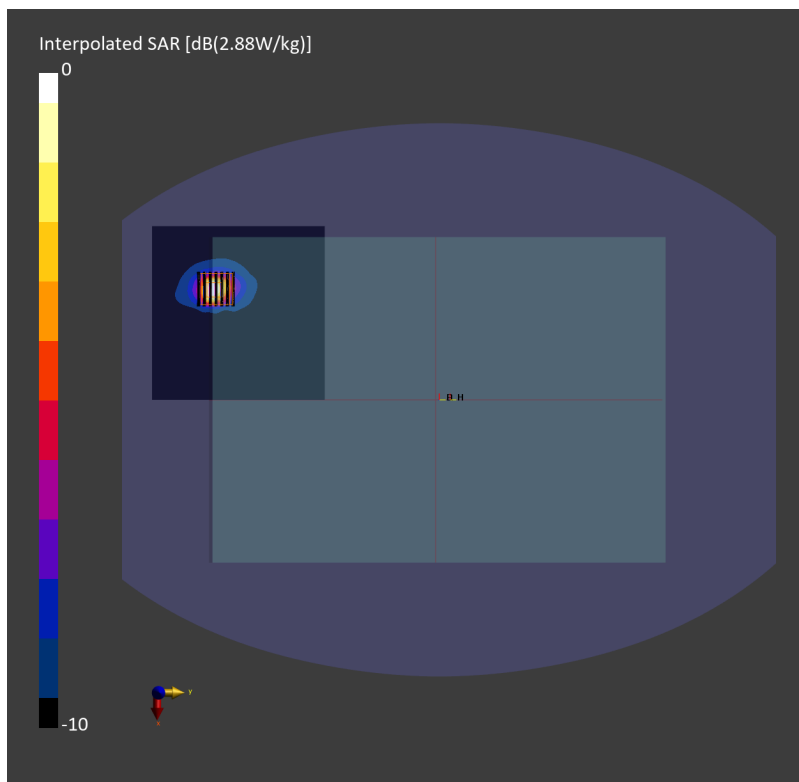

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch106

Communication System: IEEE 802.11ac WiFi; Frequency: 5530.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 5530.000$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.51, 4.68, 4.78); Calibrated: 2026-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2026-02-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.787 W/kg; SAR (10g) = 0.258 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.932 W/kg; SAR (8g) = 0.327 W/kg; SAR (10g) = 0.284 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.6 %

TSL Correction: Positive only

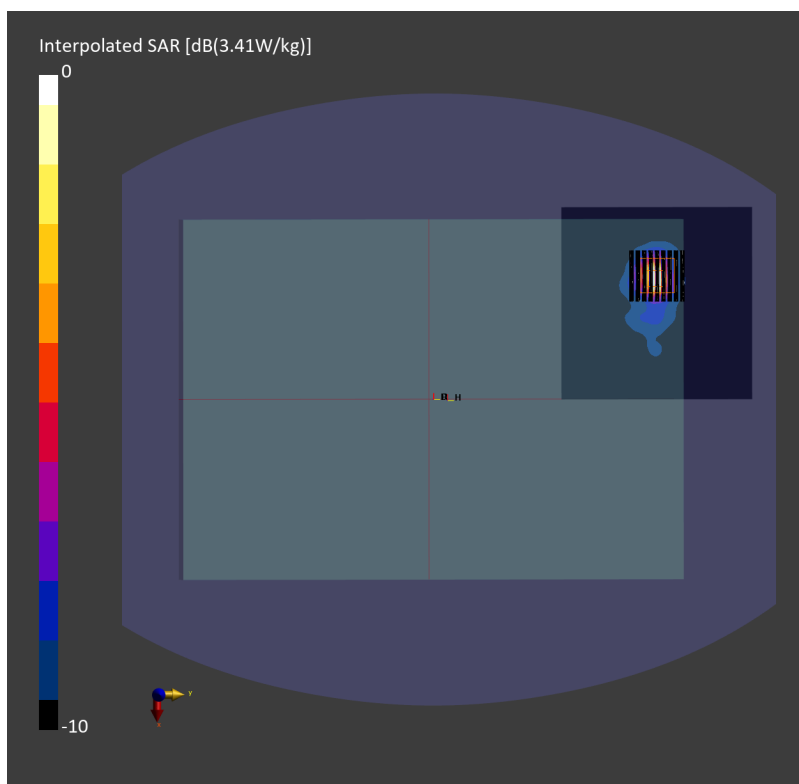

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.42, 4.59, 4.69); Calibrated: 2026-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2026-02-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.788 W/kg; SAR (10g) = 0.276 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 0.864 W/kg; SAR (8g) = 0.336 W/kg; SAR (10g) = 0.296 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 62.1 %

TSL Correction: Positive only

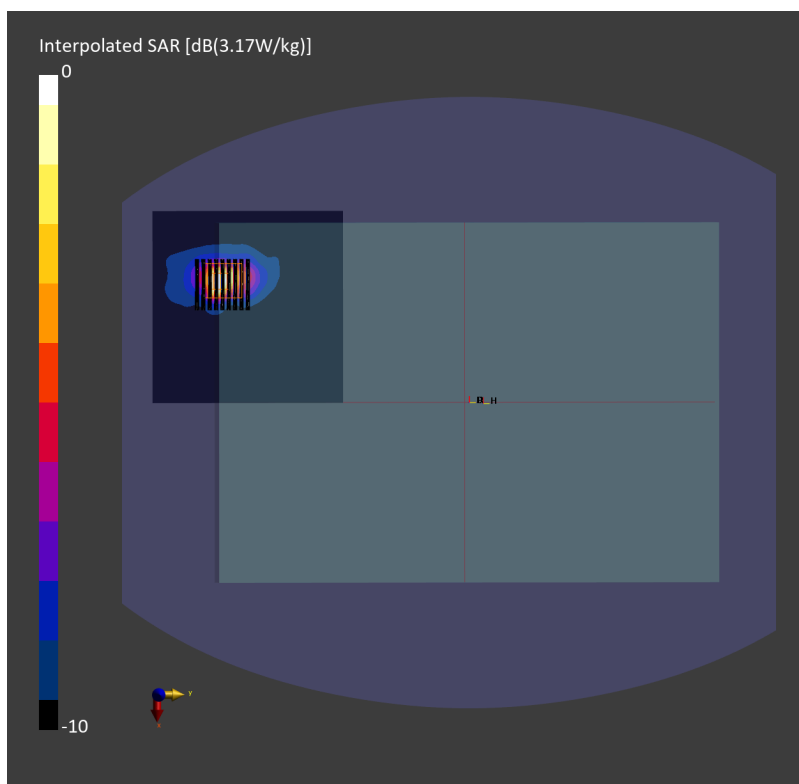

#05_Bluetooth_1Mbps_Bottom Side_0mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2402.000 MHz

Medium: HSL_600-7200_260318 Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.55, 6.81, 6.95); Calibrated: 2026-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2026-02-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.255 W/kg; SAR (10g) = 0.128 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.288 W/kg; SAR (8g) = 0.154 W/kg; SAR (10g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

TSL Correction: Positive only

