



Plots of EUT Tx waveform

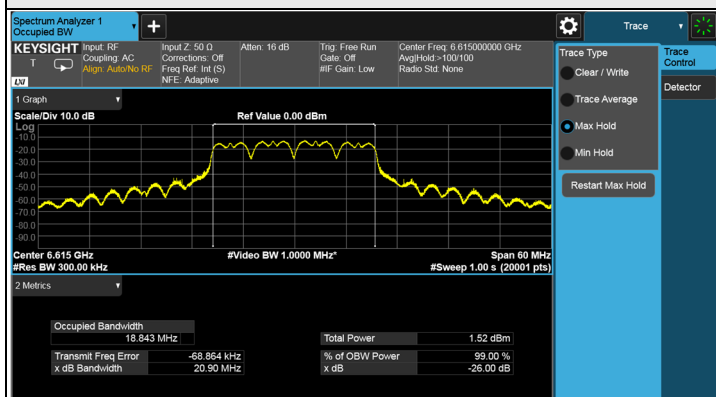


802.11ax (HE20) Full RU / CH133

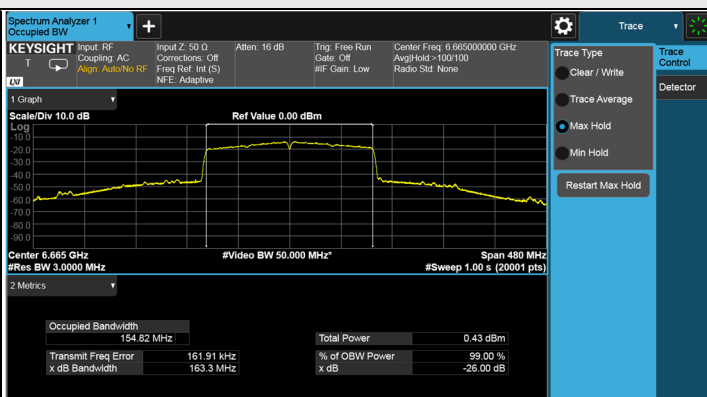


802.11ax (HE160) Full RU / CH143


Plots of Injected signal (AWGN) level

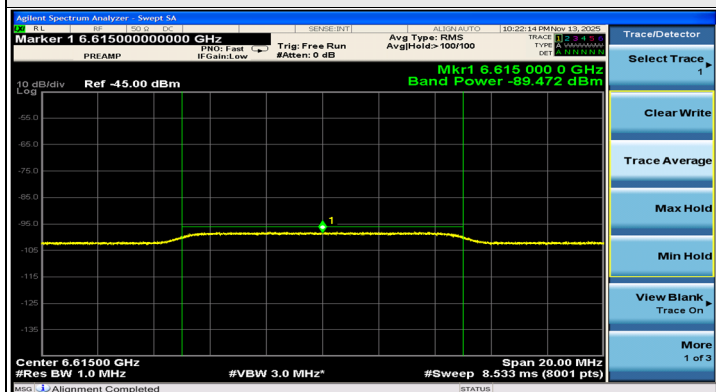


802.11ax (HE20) Full RU / CH133

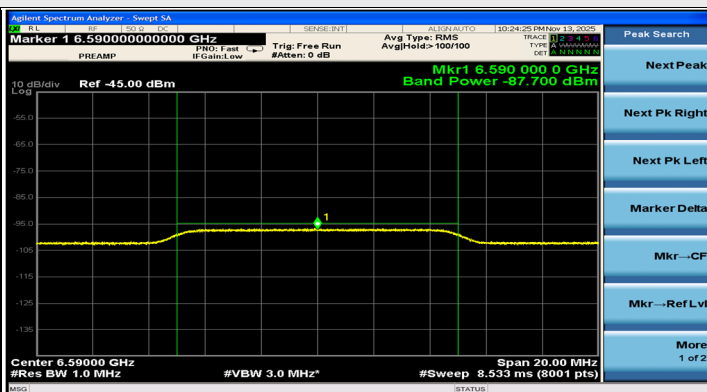

802.11ax (HE160) Full RU / CH143(Low Edge)

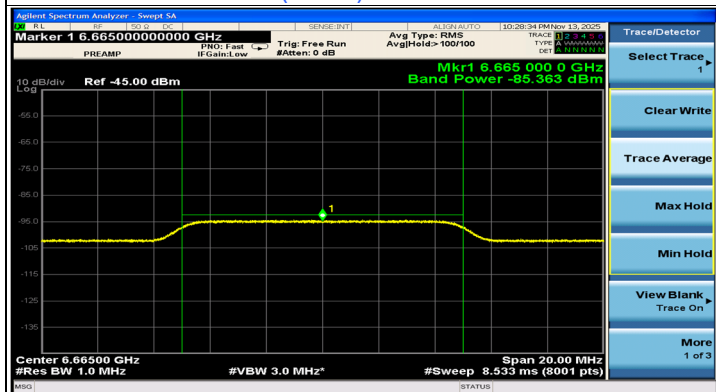


802.11ax (HE160) Full RU / CH143(Middle)

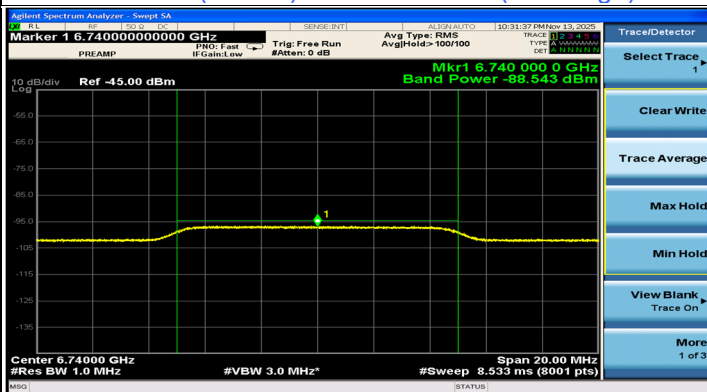

802.11ax (HE160) Full RU / CH143(High Edge)


Plots of EUT ceased transmission in the time domain

6G_UNII7_BW20_CH133_6615_TRS

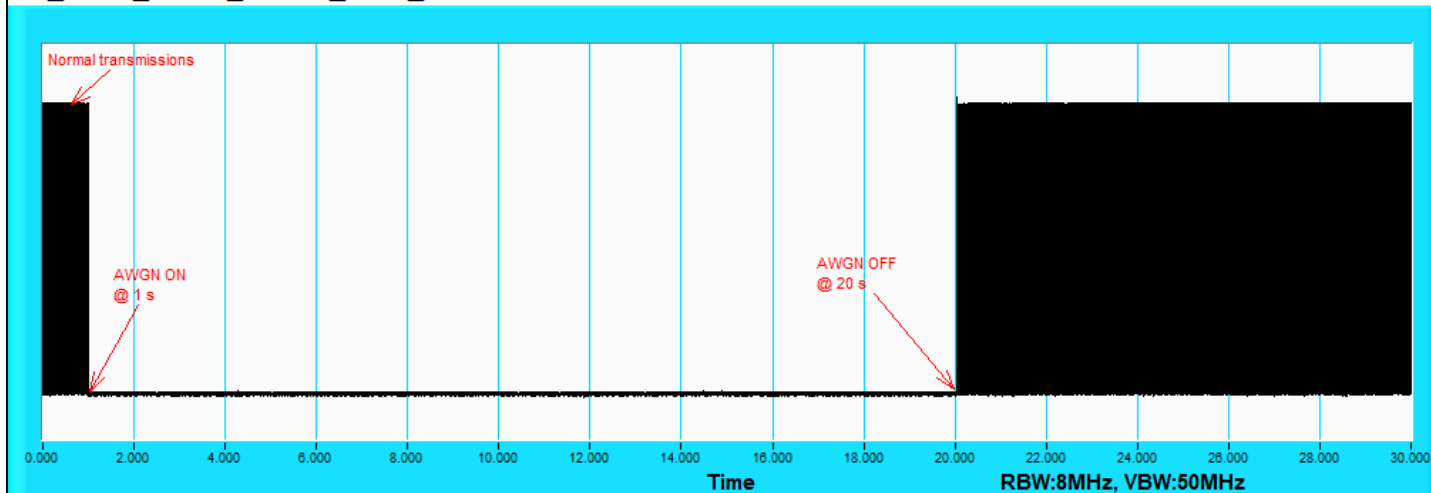


802.11ax (HE20) Full RU / CH133

6G_UNII7_BW160_CH143_6590_TRS

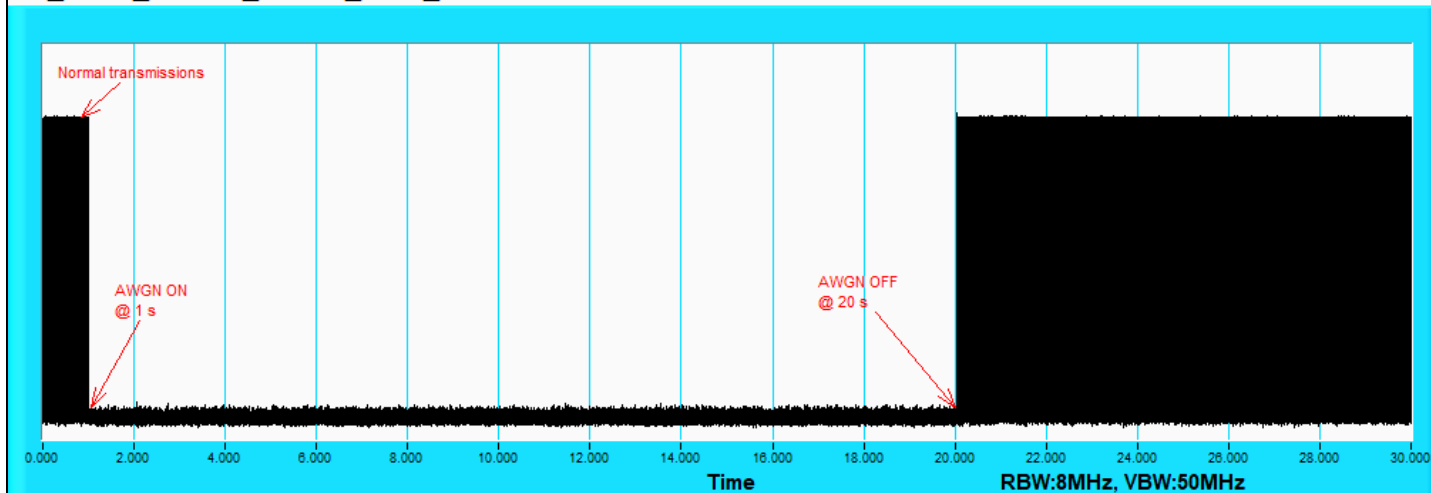

802.11ax (HE160) Full RU / CH143(Low Edge)


6G_UNII7_BW160_CH143_6665_TRS

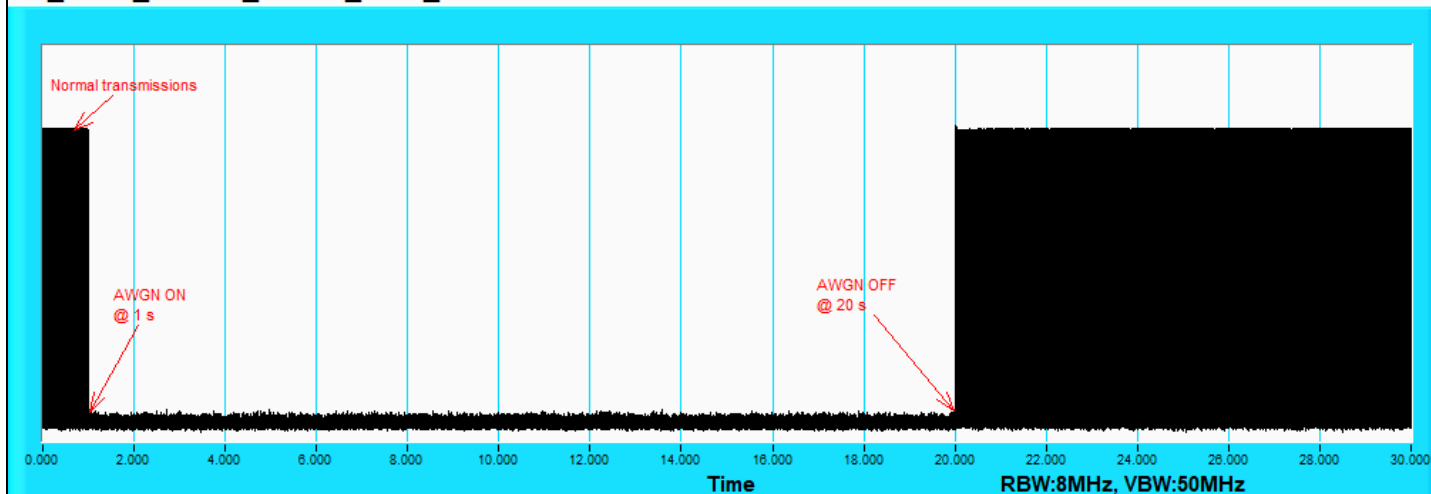

802.11ax (HE160) Full RU / CH143(Middle)

Plots of EUT ceased transmission in the time domain

6G_UNII7_BW160_CH143_6740_TRS

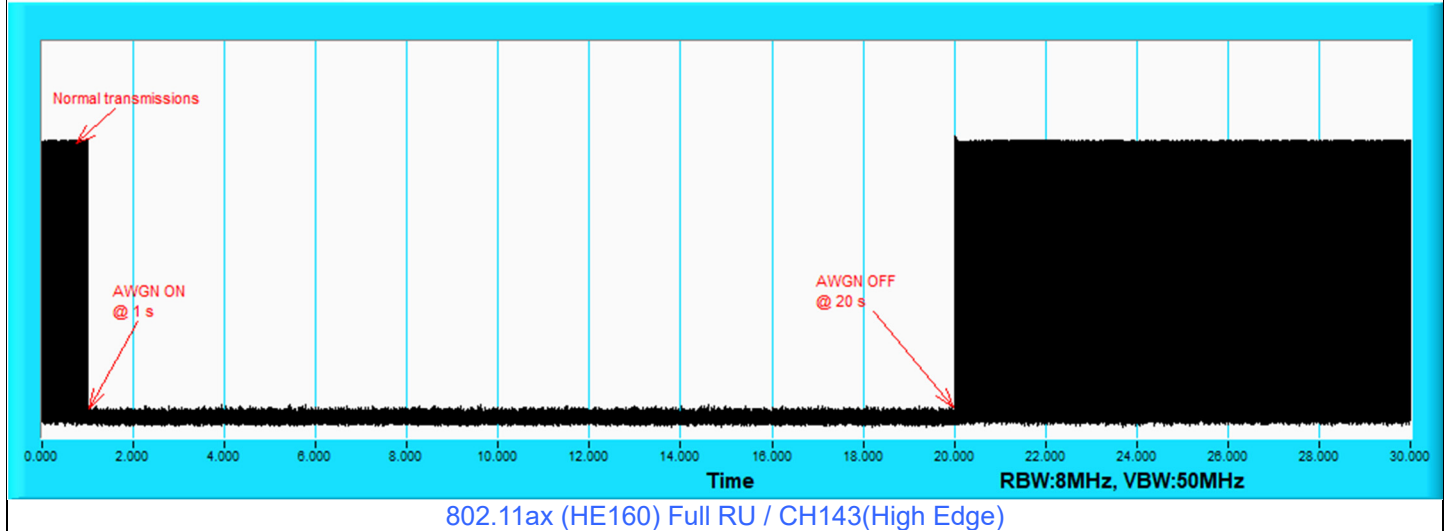

For U-NII-8



Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11ax	20	197	6935	6935	-90.21	-14.46	0	-75.75	-62	OFF
					-90.71	-14.46	0	-76.25	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
	160	207	6985	6910	-84.88	-14.46	0	-70.42	-62	OFF
					-85.38	-14.46	0	-70.92	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
				6985	-84.06	-14.46	0	-66.98	-62	OFF
					-84.56	-14.46	0	-67.48	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON
				7060	-86.55	-14.46	0	-72.09	-62	OFF
					-87.05	-14.46	0	-72.59	-62	Minimal
					-96.46	-14.46	0	-82	-62	ON

Notes:





1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11ax	20	6935	v	v	v	v	v	v	v	x	v	v	90%	90%	Pass
	160	6910	v	v	x	v	v	v	v	v	v	v	90%	90%	Pass
		6985	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

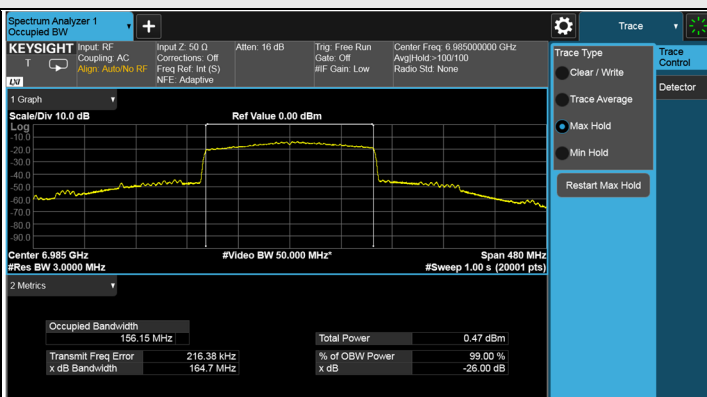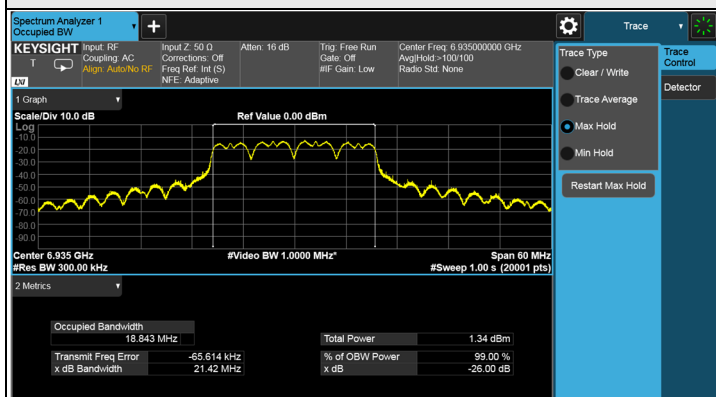


Plots of Injected signal (AWGN) level

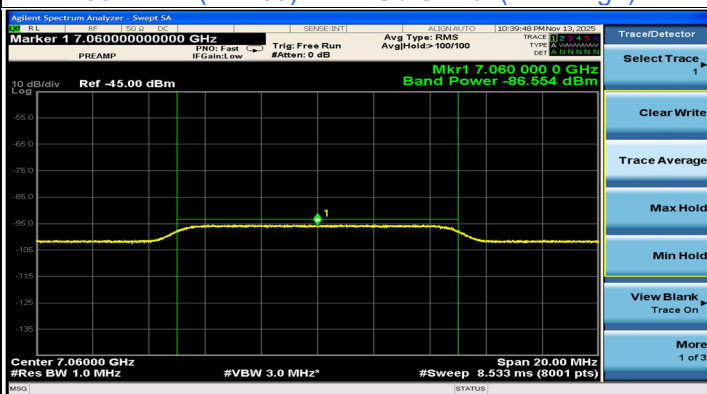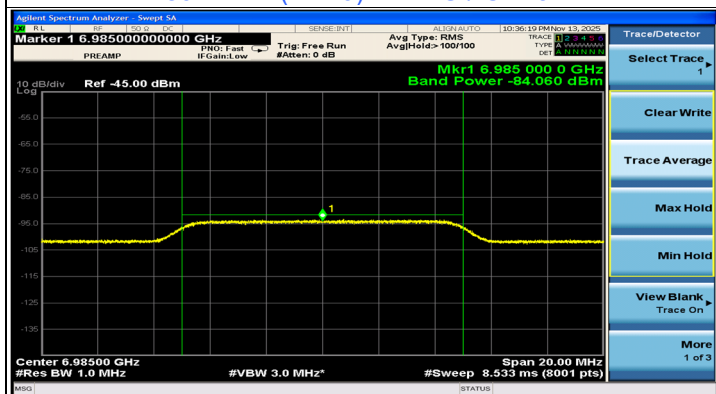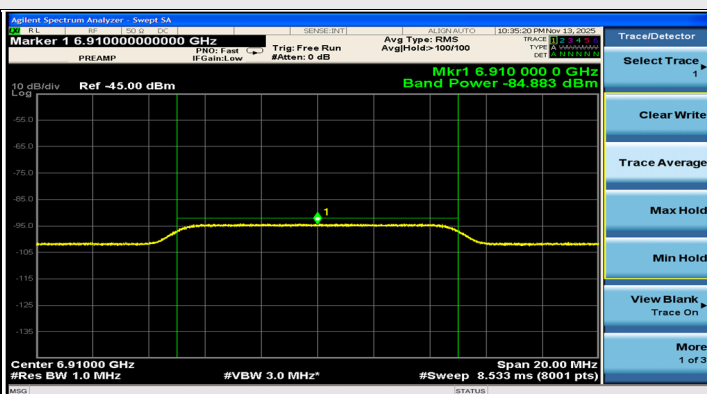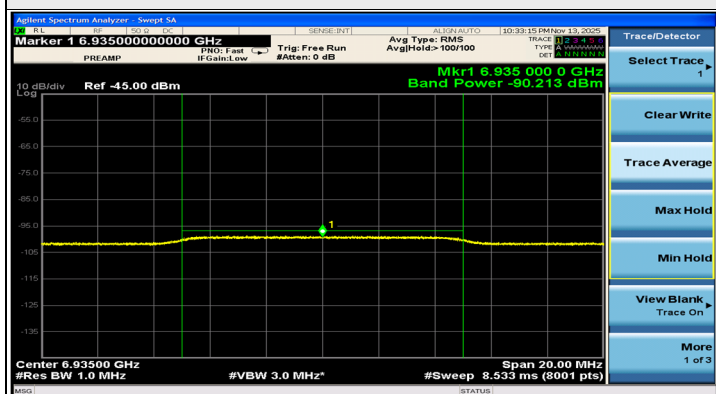


Plots of EUT ceased transmission in the time domain

6G_UNII8_BW20_CH197_6935_TRS

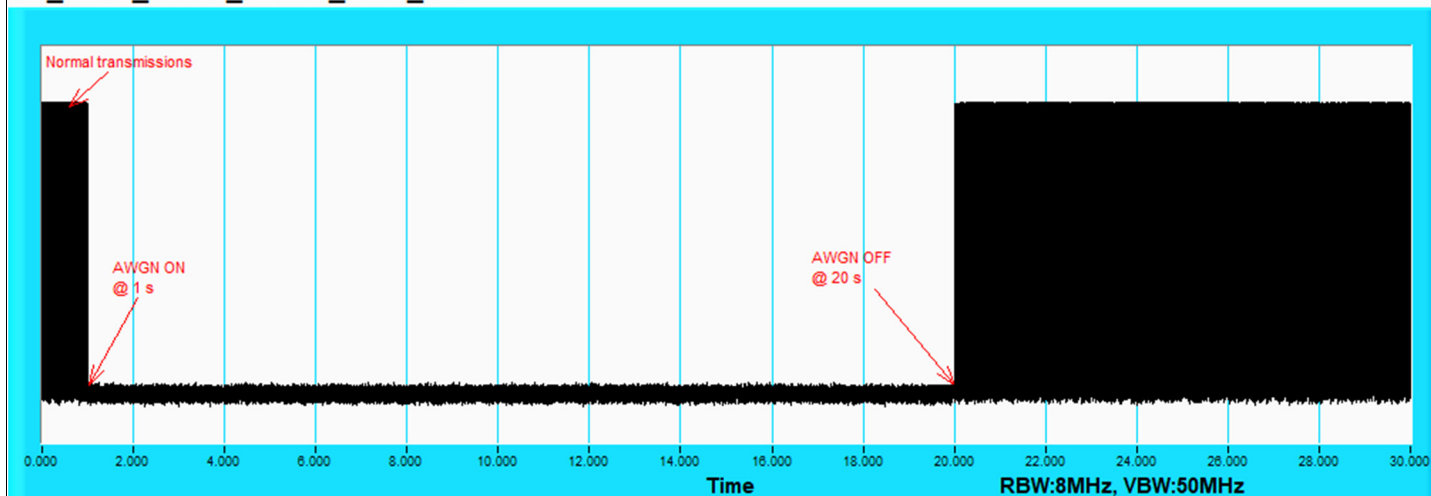


802.11ax (HE20) Full RU / CH197

6G_UNII8_BW160_CH207_6910_TRS

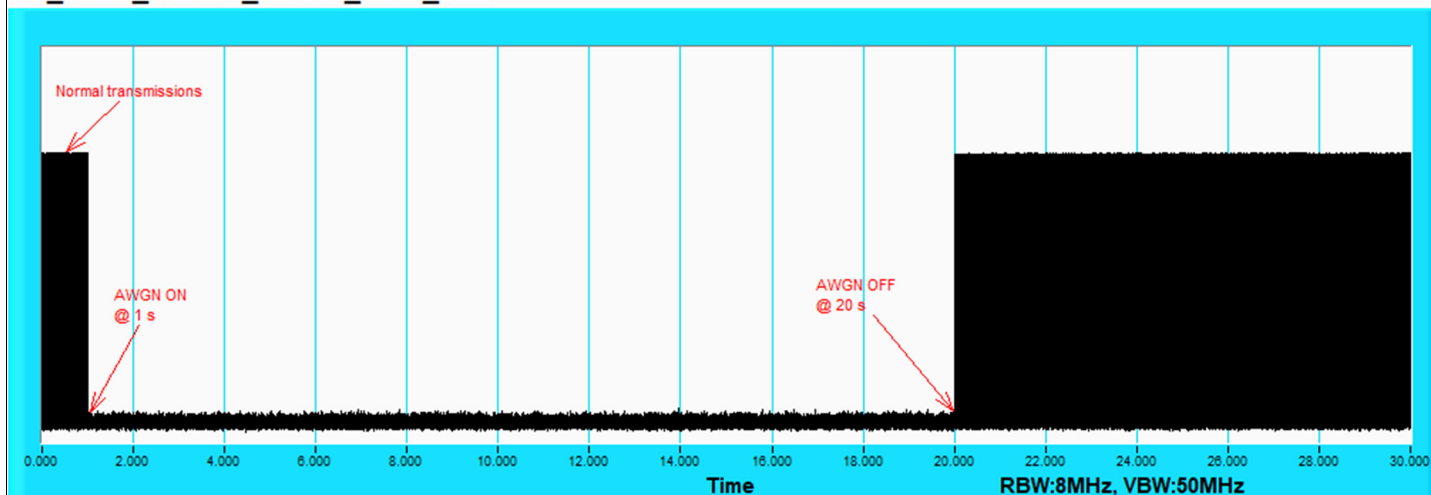


802.11ax (HE160) Full RU / CH207(Low Edge)

6G_UNII8_BW160_CH207_6985_TRS

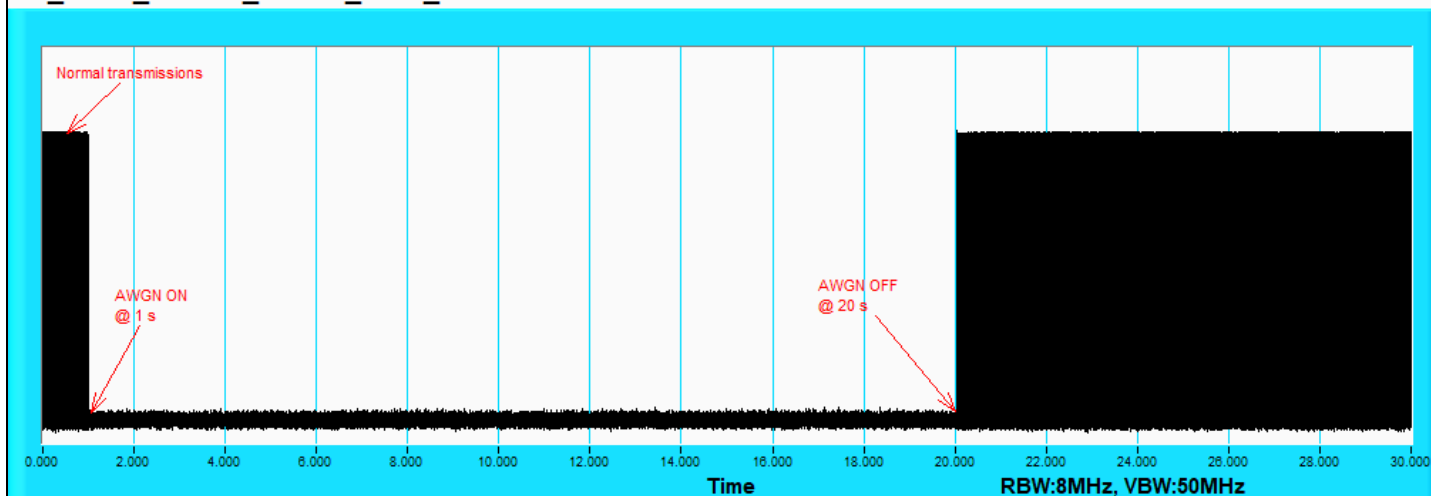

802.11ax (HE160) Full RU / CH207(Middle)

Plots of EUT ceased transmission in the time domain

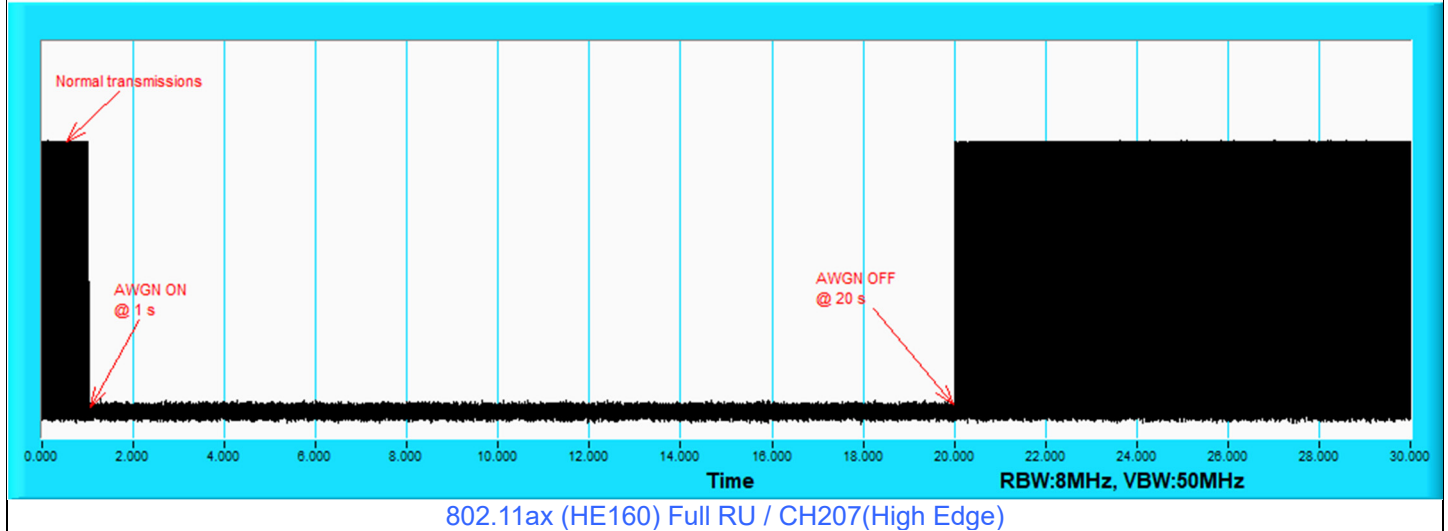6G_UNII8_BW160_CH207_7060_TRS

7.7 AC Power Conducted Emissions


Mode A

RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Thomas Cheng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	10.25	37.56	21.74	47.81	31.99	65.36	55.36	-17.55	-23.37
2	0.17400	10.26	35.57	19.28	45.83	29.54	64.77	54.77	-18.94	-25.23
3	0.26200	10.32	23.90	14.68	34.22	25.00	61.37	51.37	-27.15	-26.37
4	0.49347	10.42	30.28	21.94	40.70	32.36	56.11	46.11	-15.41	-13.75
5	3.56200	10.73	19.48	8.11	30.21	18.84	56.00	46.00	-25.79	-27.16
6	9.09800	10.86	18.80	13.51	29.66	24.37	60.00	50.00	-30.34	-25.63

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

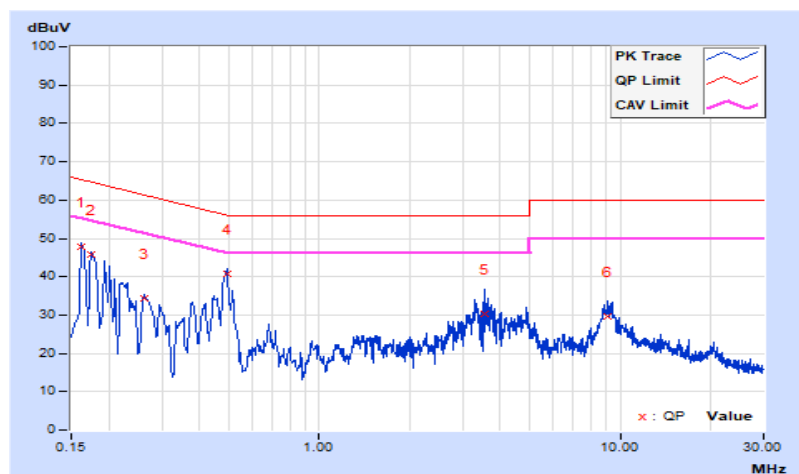


RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Thomas Cheng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	10.29	37.57	21.20	47.86	31.49	65.57	55.57	-17.71	-24.08
2	0.17755	10.30	36.68	19.24	46.98	29.54	64.60	54.60	-17.62	-25.06
3	0.19800	10.31	34.51	24.27	44.82	34.58	63.69	53.69	-18.87	-19.11
4	0.49000	10.46	26.19	19.62	36.65	30.08	56.17	46.17	-19.52	-16.09
5	3.47400	10.76	20.18	7.44	30.94	18.20	56.00	46.00	-25.06	-27.80
6	9.17800	10.95	16.43	5.71	27.38	16.66	60.00	50.00	-32.62	-33.34

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

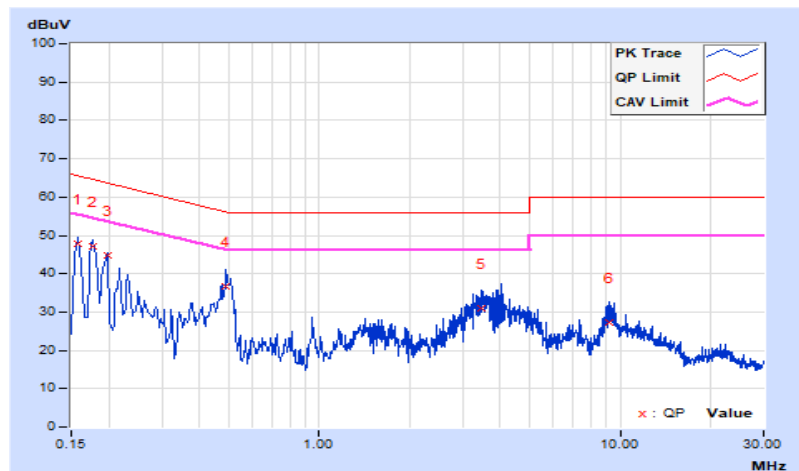


Mode B

RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15770	10.25	33.00	12.29	43.25	22.54	65.58	55.58	-22.33	-33.04
2	0.17000	10.26	39.20	25.99	49.46	36.25	64.96	54.96	-15.50	-18.71
3	0.21000	10.29	32.30	21.23	42.59	31.52	63.21	53.21	-20.62	-21.69
4	0.45400	10.41	23.17	13.16	33.58	23.57	56.80	46.80	-23.22	-23.23
5	3.65400	10.74	12.09	2.44	22.83	13.18	56.00	46.00	-33.17	-32.82
6	9.39800	10.87	16.42	6.83	27.29	17.70	60.00	50.00	-32.71	-32.30

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

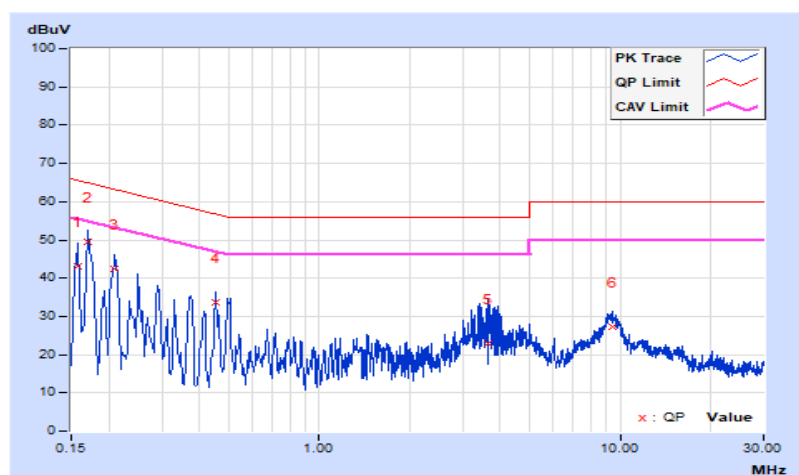


RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.29	37.74	20.41	48.03	30.70	65.78	55.78	-17.75	-25.08
2	0.16600	10.30	36.92	20.96	47.22	31.26	65.16	55.16	-17.94	-23.90
3	0.21000	10.32	28.67	11.46	38.99	21.78	63.21	53.21	-24.22	-31.43
4	0.50133	10.46	23.23	17.26	33.69	27.72	56.00	46.00	-22.31	-18.28
5	3.83000	10.79	14.04	2.97	24.83	13.76	56.00	46.00	-31.17	-32.24
6	9.22600	10.95	13.11	2.11	24.06	13.06	60.00	50.00	-35.94	-36.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

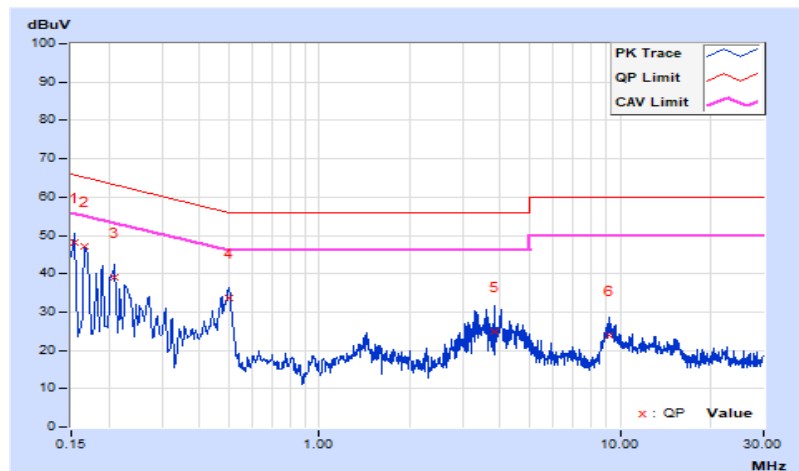

7.8 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	165.80	39.6 QP	43.5	-3.9	2.00 H	48	52.1	-12.5
2	198.78	38.0 QP	43.5	-5.5	1.50 H	199	53.3	-15.3
3	239.52	40.1 QP	46.0	-5.9	1.00 H	227	54.0	-13.9
4	298.69	44.7 QP	46.0	-1.3	1.00 H	70	56.3	-11.6
5	697.36	38.8 QP	46.0	-7.2	1.00 H	145	41.7	-2.9
6	797.27	41.0 QP	46.0	-5.0	1.50 H	182	41.8	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

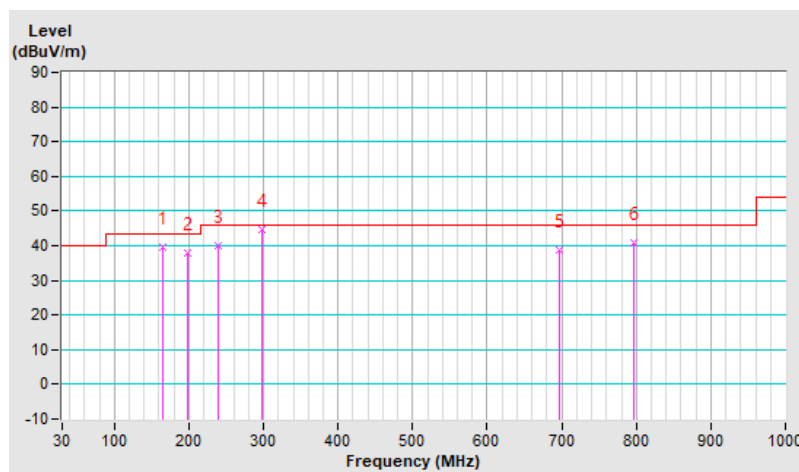


RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.31	32.2 QP	40.0	-7.8	1.00 V	193	44.5	-12.3
2	165.80	35.7 QP	43.5	-7.8	1.00 V	130	48.2	-12.5
3	239.52	31.5 QP	46.0	-14.5	2.00 V	218	45.4	-13.9
4	298.69	39.4 QP	46.0	-6.6	1.00 V	140	51.0	-11.6
5	497.54	31.8 QP	46.0	-14.2	2.00 V	300	38.4	-6.6
6	698.33	37.8 QP	46.0	-8.2	1.00 V	90	40.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

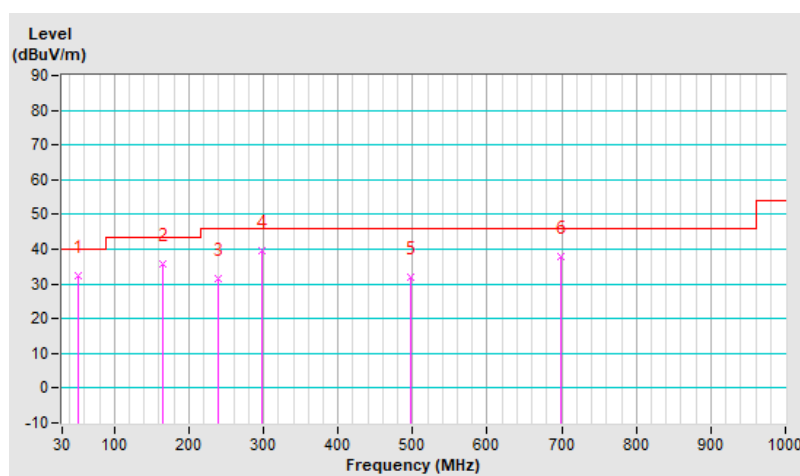


Mode B

RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	165.80	39.5 QP	43.5	-4.0	1.50 H	30	52.0	-12.5
2	198.78	38.3 QP	43.5	-5.2	1.00 H	201	53.6	-15.3
3	239.52	39.1 QP	46.0	-6.9	1.00 H	91	53.0	-13.9
4	298.69	44.6 QP	46.0	-1.4	1.00 H	71	56.2	-11.6
5	698.33	39.8 QP	46.0	-6.2	1.50 H	148	42.7	-2.9
6	797.27	41.1 QP	46.0	-4.9	2.00 H	178	41.9	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

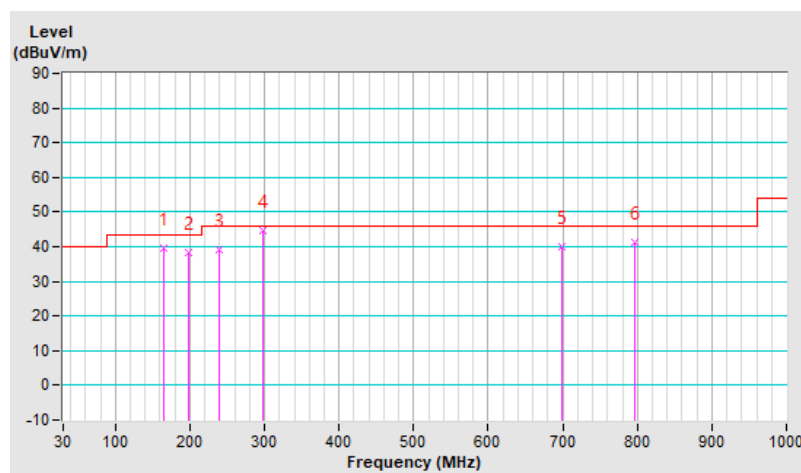


RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.31	31.0 QP	40.0	-9.0	1.00 V	258	43.3	-12.3
2	165.80	37.2 QP	43.5	-6.3	1.00 V	102	49.7	-12.5
3	232.73	30.8 QP	46.0	-15.2	1.00 V	225	45.3	-14.5
4	298.69	37.1 QP	46.0	-8.9	1.50 V	149	48.7	-11.6
5	497.54	32.3 QP	46.0	-13.7	1.50 V	280	38.9	-6.6
6	698.33	38.6 QP	46.0	-7.4	2.00 V	77	41.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

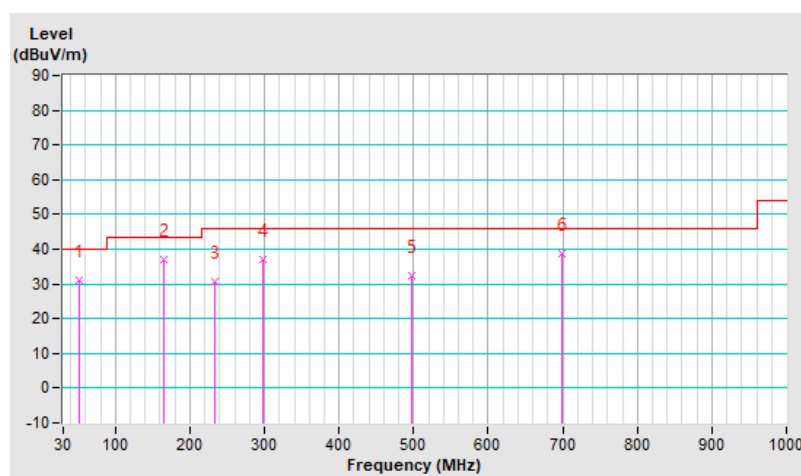

7.9 Unwanted Emissions above 1 GHz

Mode A

1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.0 PK	88.2	-39.2	3.36 H	135	42.3	6.7
2	#5925.00	35.9 AV	68.2	-32.3	3.36 H	135	29.2	6.7
3	*5955.00	88.8 PK			3.36 H	135	46.2	42.6
4	*5955.00	79.4 AV			3.36 H	135	36.8	42.6
5	11910.00	60.7 PK	74.0	-13.3	1.58 H	55	50.1	10.6
6	11910.00	48.1 AV	54.0	-5.9	1.58 H	55	37.5	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.2 PK	88.2	-39.0	2.90 V	238	42.5	6.7
2	#5925.00	36.0 AV	68.2	-32.2	2.90 V	238	29.3	6.7
3	*5955.00	89.7 PK			2.90 V	238	47.1	42.6
4	*5955.00	80.2 AV			2.90 V	238	37.6	42.6
5	11910.00	61.0 PK	74.0	-13.0	2.13 V	62	50.4	10.6
6	11910.00	48.5 AV	54.0	-5.5	2.13 V	62	37.9	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	89.3 PK			3.35 H	138	44.6	44.7
2	*6175.00	80.9 AV			3.35 H	138	36.2	44.7
3	12350.00	61.3 PK	74.0	-12.7	1.15 H	125	50.7	10.6
4	12350.00	48.2 AV	54.0	-5.8	1.15 H	125	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	90.1 PK			2.90 V	196	45.4	44.7
2	*6175.00	81.7 AV			2.90 V	196	37.0	44.7
3	12350.00	61.6 PK	74.0	-12.4	3.92 V	3	51.0	10.6
4	12350.00	48.4 AV	54.0	-5.6	3.92 V	3	37.8	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.5 PK			3.34 H	133	45.5	46.0
2	*6415.00	80.6 AV			3.34 H	133	34.6	46.0
3	#12830.00	60.8 PK	88.2	-27.4	1.90 H	120	50.2	10.6
4	#12830.00	48.0 AV	68.2	-20.2	1.90 H	120	37.4	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.3 PK			2.93 V	197	46.3	46.0
2	*6415.00	81.4 AV			2.93 V	197	35.4	46.0
3	#12830.00	61.1 PK	88.2	-27.1	2.85 V	6	50.5	10.6
4	#12830.00	48.3 AV	68.2	-19.9	2.85 V	6	37.7	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.0 PK			2.38 H	94	46.0	46.0
2	*6435.00	81.1 AV			2.38 H	94	35.1	46.0
3	#12870.00	61.2 PK	88.2	-27.0	2.10 H	316	50.6	10.6
4	#12870.00	48.1 AV	68.2	-20.1	2.10 H	316	37.5	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.8 PK			2.93 V	198	46.8	46.0
2	*6435.00	81.9 AV			2.93 V	198	35.9	46.0
3	#12870.00	61.8 PK	88.2	-26.4	1.85 V	194	51.2	10.6
4	#12870.00	48.6 AV	68.2	-19.6	1.85 V	194	38.0	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	92.2 PK			3.38 H	134	46.2	46.0
2	*6475.00	81.5 AV			3.38 H	134	35.5	46.0
3	#12950.00	60.6 PK	88.2	-27.6	2.40 H	74	50.2	10.4
4	#12950.00	47.5 AV	68.2	-20.7	2.40 H	74	37.1	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	93.0 PK			2.93 V	197	47.0	46.0
2	*6475.00	82.3 AV			2.93 V	197	36.3	46.0
3	#12950.00	61.1 PK	88.2	-27.1	2.17 V	151	50.7	10.4
4	#12950.00	47.9 AV	68.2	-20.3	2.17 V	151	37.5	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	92.9 PK			3.31 H	135	47.0	45.9
2	*6515.00	82.5 AV			3.31 H	135	36.6	45.9
3	#13030.00	60.9 PK	88.2	-27.3	3.00 H	229	50.5	10.4
4	#13030.00	48.3 AV	68.2	-19.9	3.00 H	229	37.9	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.7 PK			2.93 V	197	47.8	45.9
2	*6515.00	83.3 AV			2.93 V	197	37.4	45.9
3	#13030.00	61.5 PK	88.2	-26.7	1.97 V	69	51.1	10.4
4	#13030.00	48.7 AV	68.2	-19.5	1.97 V	69	38.3	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.0 PK			3.31 H	134	47.1	45.9
2	*6535.00	82.6 AV			3.31 H	134	36.7	45.9
3	#13070.00	61.2 PK	88.2	-27.0	1.24 H	312	51.0	10.2
4	#13070.00	48.0 AV	68.2	-20.2	1.24 H	312	37.8	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.8 PK			2.92 V	196	47.9	45.9
2	*6535.00	83.4 AV			2.92 V	196	37.5	45.9
3	#13070.00	61.5 PK	88.2	-26.7	2.02 V	20	51.3	10.2
4	#13070.00	48.4 AV	68.2	-19.8	2.02 V	20	38.2	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.3 PK			3.32 H	141	46.0	46.3
2	*6695.00	81.5 AV			3.32 H	141	35.2	46.3
3	13390.00	61.7 PK	74.0	-12.3	1.53 H	174	50.4	11.3
4	13390.00	48.3 AV	54.0	-5.7	1.53 H	174	37.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	93.1 PK			2.93 V	195	46.8	46.3
2	*6695.00	82.3 AV			2.93 V	195	36.0	46.3
3	13390.00	62.3 PK	74.0	-11.7	3.89 V	98	51.0	11.3
4	13390.00	48.8 AV	54.0	-5.2	3.89 V	98	37.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.0 PK			3.32 H	133	46.4	46.6
2	*6855.00	82.9 AV			3.32 H	133	36.3	46.6
3	#13710.00	62.4 PK	88.2	-25.8	3.97 H	338	50.2	12.2
4	#13710.00	49.5 AV	68.2	-18.7	3.97 H	338	37.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.8 PK			2.93 V	203	47.2	46.6
2	*6855.00	83.7 AV			2.93 V	203	37.1	46.6
3	#13710.00	62.6 PK	88.2	-25.6	1.96 V	80	50.4	12.2
4	#13710.00	49.8 AV	68.2	-18.4	1.96 V	80	37.6	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.2 PK			3.32 H	130	46.6	46.6
2	*6875.00	83.0 AV			3.32 H	130	36.4	46.6
3	#13750.00	62.8 PK	88.2	-25.4	1.02 H	190	50.7	12.1
4	#13750.00	49.2 AV	68.2	-19.0	1.02 H	190	37.1	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	94.0 PK			2.93 V	200	47.4	46.6
2	*6875.00	83.8 AV			2.93 V	200	37.2	46.6
3	#13750.00	63.4 PK	88.2	-24.8	2.08 V	295	51.3	12.1
4	#13750.00	49.5 AV	68.2	-18.7	2.08 V	295	37.4	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.4 PK			3.35 H	139	45.6	47.8
2	*6995.00	83.2 AV			3.35 H	139	35.4	47.8
3	#13990.00	63.0 PK	88.2	-25.2	1.96 H	331	50.6	12.4
4	#13990.00	49.8 AV	68.2	-18.4	1.96 H	331	37.4	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	94.2 PK			2.93 V	194	46.4	47.8
2	*6995.00	84.0 AV			2.93 V	194	36.2	47.8
3	#13990.00	63.4 PK	88.2	-24.8	3.40 V	191	51.0	12.4
4	#13990.00	50.1 AV	68.2	-18.1	3.40 V	191	37.7	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.0 PK			3.07 H	230	45.3	48.7
2	*7115.00	83.8 AV			3.07 H	230	35.1	48.7
3	#7125.00	73.9 PK	88.2	-14.3	3.07 H	230	61.8	12.1
4	#7125.00	47.4 AV	68.2	-20.8	3.07 H	230	35.3	12.1
5	#14230.00	63.0 PK	88.2	-25.2	1.16 H	242	50.2	12.8
6	#14230.00	50.5 AV	68.2	-17.7	1.16 H	242	37.7	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.0 PK			4.00 V	203	46.3	48.7
2	*7115.00	84.8 AV			4.00 V	203	36.1	48.7
3	#7125.00	75.5 PK	88.2	-12.7	4.00 V	203	63.4	12.1
4	#7125.00	48.9 AV	68.2	-19.3	4.00 V	203	36.8	12.1
5	#14230.00	64.0 PK	88.2	-24.2	2.99 V	97	51.2	12.8
6	#14230.00	51.1 AV	68.2	-17.1	2.99 V	97	38.3	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.8 PK	88.2	-32.4	1.37 H	275	49.1	6.7
2	#5925.00	38.6 AV	68.2	-29.6	1.37 H	275	31.9	6.7
3	*6025.00	91.9 PK			1.37 H	275	49.2	42.7
4	*6025.00	78.7 AV			1.37 H	275	36.0	42.7
5	12050.00	61.2 PK	74.0	-12.8	1.12 H	238	50.4	10.8
6	12050.00	48.1 AV	54.0	-5.9	1.12 H	238	37.3	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.0 PK	88.2	-32.2	3.78 V	227	49.3	6.7
2	#5925.00	39.2 AV	68.2	-29.0	3.78 V	227	32.5	6.7
3	*6025.00	94.8 PK			3.78 V	227	52.1	42.7
4	*6025.00	81.8 AV			3.78 V	227	39.1	42.7
5	12050.00	61.5 PK	74.0	-12.5	2.76 V	65	50.7	10.8
6	12050.00	48.4 AV	54.0	-5.6	2.76 V	65	37.6	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	94.9 PK			3.33 H	112	49.9	45.0
2	*6185.00	81.9 AV			3.33 H	112	36.9	45.0
3	12370.00	60.9 PK	74.0	-13.1	1.16 H	243	50.5	10.4
4	12370.00	47.6 AV	54.0	-6.4	1.16 H	243	37.2	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	96.0 PK			4.00 V	195	51.0	45.0
2	*6185.00	82.8 AV			4.00 V	195	37.8	45.0
3	12370.00	61.2 PK	74.0	-12.8	2.42 V	78	50.8	10.4
4	12370.00	48.1 AV	54.0	-5.9	2.42 V	78	37.7	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	95.7 PK			3.52 H	115	50.1	45.6
2	*6345.00	82.6 AV			3.52 H	115	37.0	45.6
3	12690.00	60.9 PK	74.0	-13.1	1.14 H	258	50.3	10.6
4	12690.00	47.8 AV	54.0	-6.2	1.14 H	258	37.2	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.9 PK			4.00 V	200	51.3	45.6
2	*6345.00	84.6 AV			4.00 V	200	39.0	45.6
3	12690.00	61.2 PK	74.0	-12.8	2.23 V	58	50.6	10.6
4	12690.00	48.0 AV	54.0	-6.0	2.23 V	58	37.4	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	95.7 PK			3.78 H	120	49.8	45.9
2	*6505.00	83.0 AV			3.78 H	120	37.1	45.9
3	#13010.00	60.7 PK	88.2	-27.5	1.12 H	232	50.3	10.4
4	#13010.00	47.4 AV	68.2	-20.8	1.12 H	232	37.0	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	96.9 PK			3.74 V	196	51.0	45.9
2	*6505.00	84.0 AV			3.74 V	196	38.1	45.9
3	#13010.00	60.9 PK	88.2	-27.3	2.38 V	71	50.5	10.4
4	#13010.00	47.8 AV	68.2	-20.4	2.38 V	71	37.4	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.0 PK			3.69 H	118	49.8	46.2
2	*6665.00	82.5 AV			3.69 H	118	36.3	46.2
3	13330.00	61.2 PK	74.0	-12.8	1.05 H	254	50.3	10.9
4	13330.00	48.2 AV	54.0	-5.8	1.05 H	254	37.3	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	97.3 PK			3.71 V	183	51.1	46.2
2	*6665.00	83.6 AV			3.71 V	183	37.4	46.2
3	13330.00	61.5 PK	74.0	-12.5	2.14 V	65	50.6	10.9
4	13330.00	48.3 AV	54.0	-5.7	2.14 V	65	37.4	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	95.3 PK			3.70 H	108	48.8	46.5
2	*6825.00	82.1 AV			3.70 H	108	35.6	46.5
3	#13650.00	62.5 PK	88.2	-25.7	1.15 H	248	50.3	12.2
4	#13650.00	49.3 AV	68.2	-18.9	1.15 H	248	37.1	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	98.5 PK			4.00 V	195	52.0	46.5
2	*6825.00	84.8 AV			4.00 V	195	38.3	46.5
3	#13650.00	63.0 PK	88.2	-25.2	2.24 V	72	50.8	12.2
4	#13650.00	49.7 AV	68.2	-18.5	2.24 V	72	37.5	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	94.7 PK			3.99 H	112	47.0	47.7
2	*6985.00	81.8 AV			3.99 H	112	34.1	47.7
3	#7125.00	54.9 PK	88.2	-33.3	3.99 H	112	42.8	12.1
4	#7125.00	42.0 AV	68.2	-26.2	3.99 H	112	29.9	12.1
5	#13970.00	62.5 PK	88.2	-25.7	1.13 H	235	50.2	12.3
6	#13970.00	49.3 AV	68.2	-18.9	1.13 H	235	37.0	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	99.6 PK			4.00 V	199	51.9	47.7
2	*6985.00	86.1 AV			4.00 V	199	38.4	47.7
3	#7125.00	57.1 PK	88.2	-31.1	4.00 V	199	45.0	12.1
4	#7125.00	42.7 AV	68.2	-25.5	4.00 V	199	30.6	12.1
5	#13970.00	63.0 PK	88.2	-25.2	2.18 V	81	50.7	12.3
6	#13970.00	49.6 AV	68.2	-18.6	2.18 V	81	37.3	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.0 PK	88.2	-39.2	1.02 H	188	42.3	6.7
2	#5925.00	35.6 AV	68.2	-32.6	1.02 H	188	28.9	6.7
3	*5955.00	92.5 PK			1.02 H	188	49.9	42.6
4	*5955.00	82.0 AV			1.02 H	188	39.4	42.6
5	11910.00	60.8 PK	74.0	-13.2	1.43 H	282	50.2	10.6
6	11910.00	47.7 AV	54.0	-6.3	1.43 H	282	37.1	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.8 PK	88.2	-38.4	3.64 V	184	43.1	6.7
2	#5925.00	35.9 AV	68.2	-32.3	3.64 V	184	29.2	6.7
3	*5955.00	95.7 PK			3.64 V	184	53.1	42.6
4	*5955.00	85.9 AV			3.64 V	184	43.3	42.6
5	11910.00	61.0 PK	74.0	-13.0	2.41 V	102	50.4	10.6
6	11910.00	47.9 AV	54.0	-6.1	2.41 V	102	37.3	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	94.9 PK			2.95 H	173	50.2	44.7
2	*6175.00	84.7 AV			2.95 H	173	40.0	44.7
3	12350.00	60.9 PK	74.0	-13.1	1.52 H	267	50.3	10.6
4	12350.00	47.7 AV	54.0	-6.3	1.52 H	267	37.1	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	96.3 PK			3.03 V	178	51.6	44.7
2	*6175.00	86.7 AV			3.03 V	178	42.0	44.7
3	12350.00	61.2 PK	74.0	-12.8	2.31 V	127	50.6	10.6
4	12350.00	48.1 AV	54.0	-5.9	2.31 V	127	37.5	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	94.9 PK			3.14 H	166	48.9	46.0
2	*6415.00	84.9 AV			3.14 H	166	38.9	46.0
3	#12830.00	61.0 PK	88.2	-27.2	1.46 H	258	50.4	10.6
4	#12830.00	47.9 AV	68.2	-20.3	1.46 H	258	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	98.0 PK			3.20 V	178	52.0	46.0
2	*6415.00	87.7 AV			3.20 V	178	41.7	46.0
3	#12830.00	61.2 PK	88.2	-27.0	2.48 V	136	50.6	10.6
4	#12830.00	48.2 AV	68.2	-20.0	2.48 V	136	37.6	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	95.2 PK			3.12 H	175	49.2	46.0
2	*6435.00	85.6 AV			3.12 H	175	39.6	46.0
3	#12870.00	61.0 PK	88.2	-27.2	2.07 H	46	50.4	10.6
4	#12870.00	47.9 AV	68.2	-20.3	2.07 H	46	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	97.6 PK			3.18 V	177	51.6	46.0
2	*6435.00	87.4 AV			3.18 V	177	41.4	46.0
3	#12870.00	61.3 PK	88.2	-26.9	1.52 V	241	50.7	10.6
4	#12870.00	48.1 AV	68.2	-20.1	1.52 V	241	37.5	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	94.9 PK			3.23 H	173	48.9	46.0
2	*6475.00	84.6 AV			3.23 H	173	38.6	46.0
3	#12950.00	60.7 PK	88.2	-27.5	2.14 H	59	50.3	10.4
4	#12950.00	47.5 AV	68.2	-20.7	2.14 H	59	37.1	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	97.4 PK			3.16 V	175	51.4	46.0
2	*6475.00	87.0 AV			3.16 V	175	41.0	46.0
3	#12950.00	60.9 PK	88.2	-27.3	1.58 V	231	50.5	10.4
4	#12950.00	47.6 AV	68.2	-20.6	1.58 V	231	37.2	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.0 PK			3.48 H	164	48.1	45.9
2	*6515.00	83.9 AV			3.48 H	164	38.0	45.9
3	#13030.00	61.0 PK	88.2	-27.2	2.08 H	69	50.6	10.4
4	#13030.00	47.9 AV	68.2	-20.3	2.08 H	69	37.5	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.9 PK			3.41 V	175	50.0	45.9
2	*6515.00	86.2 AV			3.41 V	175	40.3	45.9
3	#13030.00	61.1 PK	88.2	-27.1	1.47 V	228	50.7	10.4
4	#13030.00	47.8 AV	68.2	-20.4	1.47 V	228	37.4	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.7 PK			3.46 H	167	48.8	45.9
2	*6535.00	84.5 AV			3.46 H	167	38.6	45.9
3	#13070.00	60.6 PK	88.2	-27.6	2.18 H	76	50.4	10.2
4	#13070.00	47.4 AV	68.2	-20.8	2.18 H	76	37.2	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.3 PK			3.50 V	165	50.4	45.9
2	*6535.00	86.3 AV			3.50 V	165	40.4	45.9
3	#13070.00	61.0 PK	88.2	-27.2	1.58 V	221	50.8	10.2
4	#13070.00	47.8 AV	68.2	-20.4	1.58 V	221	37.6	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	94.2 PK			3.45 H	164	47.9	46.3
2	*6695.00	84.1 AV			3.45 H	164	37.8	46.3
3	13390.00	61.6 PK	74.0	-12.4	2.13 H	71	50.3	11.3
4	13390.00	48.4 AV	54.0	-5.6	2.13 H	71	37.1	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.8 PK			3.52 V	175	50.5	46.3
2	*6695.00	86.6 AV			3.52 V	175	40.3	46.3
3	13390.00	61.9 PK	74.0	-12.1	1.51 V	235	50.6	11.3
4	13390.00	48.6 AV	54.0	-5.4	1.51 V	235	37.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.2 PK			3.65 H	127	47.6	46.6
2	*6855.00	83.5 AV			3.65 H	127	36.9	46.6
3	#13710.00	62.7 PK	88.2	-25.5	2.35 H	78	50.5	12.2
4	#13710.00	49.4 AV	68.2	-18.8	2.35 H	78	37.2	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	96.6 PK			3.61 V	194	50.0	46.6
2	*6855.00	86.7 AV			3.61 V	194	40.1	46.6
3	#13710.00	62.9 PK	88.2	-25.3	1.35 V	221	50.7	12.2
4	#13710.00	49.8 AV	68.2	-18.4	1.35 V	221	37.6	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	94.0 PK			3.54 H	153	47.4	46.6
2	*6875.00	83.6 AV			3.54 H	153	37.0	46.6
3	#13750.00	62.3 PK	88.2	-25.9	2.10 H	38	50.2	12.1
4	#13750.00	49.1 AV	68.2	-19.1	2.10 H	38	37.0	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.8 PK			3.49 V	169	50.2	46.6
2	*6875.00	87.0 AV			3.49 V	169	40.4	46.6
3	#13750.00	62.6 PK	88.2	-25.6	1.32 V	228	50.5	12.1
4	#13750.00	49.3 AV	68.2	-18.9	1.32 V	228	37.2	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.7 PK			3.60 H	153	45.9	47.8
2	*6995.00	83.8 AV			3.60 H	153	36.0	47.8
3	#13990.00	62.8 PK	88.2	-25.4	1.96 H	41	50.4	12.4
4	#13990.00	49.7 AV	68.2	-18.5	1.96 H	41	37.3	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.2 PK			3.55 V	175	50.4	47.8
2	*6995.00	88.5 AV			3.55 V	175	40.7	47.8
3	#13990.00	63.1 PK	88.2	-25.1	1.48 V	215	50.7	12.4
4	#13990.00	49.8 AV	68.2	-18.4	1.48 V	215	37.4	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.6 PK			3.59 H	157	43.9	48.7
2	*7115.00	81.7 AV			3.59 H	157	33.0	48.7
3	#7125.00	71.7 PK	88.2	-16.5	3.59 H	157	59.6	12.1
4	#7125.00	53.0 AV	68.2	-15.2	3.59 H	157	40.9	12.1
5	#14230.00	63.1 PK	88.2	-25.1	1.92 H	48	50.3	12.8
6	#14230.00	49.9 AV	68.2	-18.3	1.92 H	48	37.1	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.4 PK			3.41 V	176	49.7	48.7
2	*7115.00	88.3 AV			3.41 V	176	39.6	48.7
3	#7125.00	78.1 PK	88.2	-10.1	3.41 V	176	66.0	12.1
4	#7125.00	60.9 AV	68.2	-7.3	3.41 V	176	48.8	12.1
5	#14230.00	64.1 PK	88.2	-24.1	1.42 V	228	51.3	12.8
6	#14230.00	50.9 AV	68.2	-17.3	1.42 V	228	38.1	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.0 PK	88.2	-39.2	1.00 H	189	42.3	6.7
2	#5925.00	35.8 AV	68.2	-32.4	1.00 H	189	29.1	6.7
3	*5955.00	92.1 PK			1.00 H	189	49.5	42.6
4	*5955.00	78.8 AV			1.00 H	189	36.2	42.6
5	11910.00	61.4 PK	74.0	-12.6	3.36 H	352	50.8	10.6
6	11910.00	48.2 AV	54.0	-5.8	3.36 H	352	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.2 PK	88.2	-39.0	2.90 V	187	42.5	6.7
2	#5925.00	36.1 AV	68.2	-32.1	2.90 V	187	29.4	6.7
3	*5955.00	95.5 PK			2.90 V	187	52.9	42.6
4	*5955.00	83.1 AV			2.90 V	187	40.5	42.6
5	11910.00	61.7 PK	74.0	-12.3	3.19 V	153	51.1	10.6
6	11910.00	48.6 AV	54.0	-5.4	3.19 V	153	38.0	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	93.4 PK			1.00 H	185	48.7	44.7
2	*6175.00	80.5 AV			1.00 H	185	35.8	44.7
3	12350.00	61.1 PK	74.0	-12.9	1.37 H	236	50.5	10.6
4	12350.00	47.9 AV	54.0	-6.1	1.37 H	236	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	97.2 PK			2.90 V	187	52.5	44.7
2	*6175.00	85.0 AV			2.90 V	187	40.3	44.7
3	12350.00	61.4 PK	74.0	-12.6	1.03 V	89	50.8	10.6
4	12350.00	48.3 AV	54.0	-5.7	1.03 V	89	37.7	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.7 PK			1.00 H	185	47.7	46.0
2	*6415.00	81.5 AV			1.00 H	185	35.5	46.0
3	#12830.00	61.2 PK	88.2	-27.0	2.60 H	305	50.6	10.6
4	#12830.00	48.0 AV	68.2	-20.2	2.60 H	305	37.4	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.1 PK			2.90 V	185	50.1	46.0
2	*6415.00	84.0 AV			2.90 V	185	38.0	46.0
3	#12830.00	61.7 PK	88.2	-26.5	2.88 V	193	51.1	10.6
4	#12830.00	48.4 AV	68.2	-19.8	2.88 V	193	37.8	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.8 PK			1.00 H	183	47.8	46.0
2	*6435.00	81.7 AV			1.00 H	183	35.7	46.0
3	#12870.00	61.6 PK	88.2	-26.6	2.44 H	313	51.0	10.6
4	#12870.00	48.2 AV	68.2	-20.0	2.44 H	313	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.4 PK			2.90 V	185	50.4	46.0
2	*6435.00	84.3 AV			2.90 V	185	38.3	46.0
3	#12870.00	61.9 PK	88.2	-26.3	2.68 V	302	51.3	10.6
4	#12870.00	48.6 AV	68.2	-19.6	2.68 V	302	38.0	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	93.6 PK			1.00 H	182	47.6	46.0
2	*6475.00	81.5 AV			1.00 H	182	35.5	46.0
3	#12950.00	60.6 PK	88.2	-27.6	3.51 H	112	50.2	10.4
4	#12950.00	47.7 AV	68.2	-20.5	3.51 H	112	37.3	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	96.2 PK			2.90 V	186	50.2	46.0
2	*6475.00	84.1 AV			2.90 V	186	38.1	46.0
3	#12950.00	61.1 PK	88.2	-27.1	2.14 V	78	50.7	10.4
4	#12950.00	48.4 AV	68.2	-19.8	2.14 V	78	38.0	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.7 PK			1.00 H	188	47.8	45.9
2	*6515.00	81.6 AV			1.00 H	188	35.7	45.9
3	#13030.00	60.9 PK	88.2	-27.3	2.71 H	290	50.5	10.4
4	#13030.00	47.7 AV	68.2	-20.5	2.71 H	290	37.3	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.3 PK			2.90 V	185	50.4	45.9
2	*6515.00	84.2 AV			2.90 V	185	38.3	45.9
3	#13030.00	61.2 PK	88.2	-27.0	1.03 V	248	50.8	10.4
4	#13030.00	48.0 AV	68.2	-20.2	1.03 V	248	37.6	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.5 PK			1.00 H	183	47.6	45.9
2	*6535.00	81.4 AV			1.00 H	183	35.5	45.9
3	#13070.00	60.9 PK	88.2	-27.3	1.26 H	153	50.7	10.2
4	#13070.00	47.9 AV	68.2	-20.3	1.26 H	153	37.7	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.1 PK			2.90 V	185	50.2	45.9
2	*6535.00	84.0 AV			2.90 V	185	38.1	45.9
3	#13070.00	61.3 PK	88.2	-26.9	1.90 V	65	51.1	10.2
4	#13070.00	48.3 AV	68.2	-19.9	1.90 V	65	38.1	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	93.8 PK			1.06 H	181	47.5	46.3
2	*6695.00	81.7 AV			1.06 H	181	35.4	46.3
3	13390.00	61.9 PK	74.0	-12.1	2.46 H	172	50.6	11.3
4	13390.00	48.7 AV	54.0	-5.3	2.46 H	172	37.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.4 PK			2.91 V	185	50.1	46.3
2	*6695.00	84.3 AV			2.91 V	185	38.0	46.3
3	13390.00	62.5 PK	74.0	-11.5	3.80 V	2	51.2	11.3
4	13390.00	49.2 AV	54.0	-4.8	3.80 V	2	37.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.1 PK			1.01 H	188	48.5	46.6
2	*6855.00	83.0 AV			1.01 H	188	36.4	46.6
3	#13710.00	62.8 PK	88.2	-25.4	3.65 H	143	50.6	12.2
4	#13710.00	49.9 AV	68.2	-18.3	3.65 H	143	37.7	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.7 PK			2.90 V	185	51.1	46.6
2	*6855.00	85.6 AV			2.90 V	185	39.0	46.6
3	#13710.00	63.1 PK	88.2	-25.1	1.74 V	337	50.9	12.2
4	#13710.00	50.2 AV	68.2	-18.0	1.74 V	337	38.0	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.0 PK			1.02 H	188	48.4	46.6
2	*6875.00	82.9 AV			1.02 H	188	36.3	46.6
3	#13750.00	62.3 PK	88.2	-25.9	1.39 H	232	50.2	12.1
4	#13750.00	49.2 AV	68.2	-19.0	1.39 H	232	37.1	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	97.6 PK			2.92 V	185	51.0	46.6
2	*6875.00	85.5 AV			2.92 V	185	38.9	46.6
3	#13750.00	62.8 PK	88.2	-25.4	1.55 V	63	50.7	12.1
4	#13750.00	49.5 AV	68.2	-18.7	1.55 V	63	37.4	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	95.4 PK			1.04 H	181	47.6	47.8
2	*6995.00	83.3 AV			1.04 H	181	35.5	47.8
3	#13990.00	63.2 PK	88.2	-25.0	2.98 H	107	50.8	12.4
4	#13990.00	50.0 AV	68.2	-18.2	2.98 H	107	37.6	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.0 PK			2.91 V	185	50.2	47.8
2	*6995.00	85.9 AV			2.91 V	185	38.1	47.8
3	#13990.00	63.4 PK	88.2	-24.8	2.20 V	300	51.0	12.4
4	#13990.00	50.2 AV	68.2	-18.0	2.20 V	300	37.8	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.4 PK			3.57 H	153	45.7	48.7
2	*7115.00	81.3 AV			3.57 H	153	32.6	48.7
3	#7125.00	76.5 PK	88.2	-11.7	3.57 H	153	64.4	12.1
4	#7125.00	61.4 AV	68.2	-6.8	3.57 H	153	49.3	12.1
5	#14230.00	62.9 PK	88.2	-25.3	2.92 H	97	50.1	12.8
6	#14230.00	49.8 AV	68.2	-18.4	2.92 H	97	37.0	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.9 PK			3.42 V	174	52.2	48.7
2	*7115.00	89.0 AV			3.42 V	174	40.3	48.7
3	#7125.00	83.9 PK	88.2	-4.3	3.42 V	174	71.8	12.1
4	#7125.00	67.6 AV	68.2	-0.6	3.42 V	174	55.5	12.1
5	#14230.00	63.2 PK	88.2	-25.0	1.89 V	287	50.4	12.8
6	#14230.00	50.1 AV	68.2	-18.1	1.89 V	287	37.3	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.3 PK	88.2	-38.9	3.59 H	162	42.6	6.7
2	#5925.00	35.9 AV	68.2	-32.3	3.59 H	162	29.2	6.7
3	*5965.00	93.1 PK			3.59 H	162	50.5	42.6
4	*5965.00	80.0 AV			3.59 H	162	37.4	42.6
5	11930.00	60.9 PK	74.0	-13.1	2.74 H	86	50.4	10.5
6	11930.00	47.7 AV	54.0	-6.3	2.74 H	86	37.2	10.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.1 PK	88.2	-38.1	1.00 V	187	43.4	6.7
2	#5925.00	36.0 AV	68.2	-32.2	1.00 V	187	29.3	6.7
3	*5965.00	96.8 PK			3.01 V	187	54.2	42.6
4	*5965.00	83.7 AV			3.01 V	187	41.1	42.6
5	11930.00	61.1 PK	74.0	-12.9	1.72 V	276	50.6	10.5
6	11930.00	48.0 AV	54.0	-6.0	1.72 V	276	37.5	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	93.7 PK			3.83 H	155	49.2	44.5
2	*6165.00	81.1 AV			3.83 H	155	36.6	44.5
3	12330.00	61.2 PK	74.0	-12.8	2.47 H	75	50.5	10.7
4	12330.00	48.1 AV	54.0	-5.9	2.47 H	75	37.4	10.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	97.5 PK			2.90 V	183	53.0	44.5
2	*6165.00	84.9 AV			2.90 V	183	40.4	44.5
3	12330.00	61.4 PK	74.0	-12.6	1.68 V	257	50.7	10.7
4	12330.00	48.2 AV	54.0	-5.8	1.68 V	257	37.5	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	94.2 PK			3.72 H	156	48.3	45.9
2	*6405.00	81.4 AV			3.72 H	156	35.5	45.9
3	#12810.00	60.9 PK	88.2	-27.3	2.23 H	69	50.3	10.6
4	#12810.00	47.8 AV	68.2	-20.4	2.23 H	69	37.2	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	99.0 PK			3.16 V	186	53.1	45.9
2	*6405.00	86.4 AV			3.16 V	186	40.5	45.9
3	#12810.00	61.2 PK	88.2	-27.0	1.72 V	245	50.6	10.6
4	#12810.00	48.1 AV	68.2	-20.1	1.72 V	245	37.5	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	94.1 PK			3.59 H	168	48.0	46.1
2	*6445.00	81.4 AV			3.59 H	168	35.3	46.1
3	#12890.00	61.0 PK	88.2	-27.2	2.10 H	54	50.5	10.5
4	#12890.00	47.7 AV	68.2	-20.5	2.10 H	54	37.2	10.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	98.7 PK			2.68 V	198	52.6	46.1
2	*6445.00	85.6 AV			2.68 V	198	39.5	46.1
3	#12890.00	61.2 PK	88.2	-27.0	1.64 V	238	50.7	10.5
4	#12890.00	48.1 AV	68.2	-20.1	1.64 V	238	37.6	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	93.7 PK			3.58 H	167	47.7	46.0
2	*6485.00	81.3 AV			3.58 H	167	35.3	46.0
3	#12970.00	60.6 PK	88.2	-27.6	2.38 H	39	50.3	10.3
4	#12970.00	47.4 AV	68.2	-20.8	2.38 H	39	37.1	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	98.6 PK			3.57 V	184	52.6	46.0
2	*6485.00	86.3 AV			3.57 V	184	40.3	46.0
3	#12970.00	60.9 PK	88.2	-27.3	1.52 V	248	50.6	10.3
4	#12970.00	47.7 AV	68.2	-20.5	1.52 V	248	37.4	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	94.7 PK			3.73 H	166	48.8	45.9
2	*6525.00	82.1 AV			3.73 H	166	36.2	45.9
3	#13050.00	60.9 PK	88.2	-27.3	2.21 H	48	50.6	10.3
4	#13050.00	47.6 AV	68.2	-20.6	2.21 H	48	37.3	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	98.5 PK			3.37 V	181	52.6	45.9
2	*6525.00	86.3 AV			3.37 V	181	40.4	45.9
3	#13050.00	61.1 PK	88.2	-27.1	1.48 V	235	50.8	10.3
4	#13050.00	47.9 AV	68.2	-20.3	1.48 V	235	37.6	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	94.4 PK			3.66 H	157	48.4	46.0
2	*6565.00	82.1 AV			3.66 H	157	36.1	46.0
3	#13130.00	60.7 PK	88.2	-27.5	2.35 H	77	50.4	10.3
4	#13130.00	47.5 AV	68.2	-20.7	2.35 H	77	37.2	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	99.6 PK			3.31 V	183	53.6	46.0
2	*6565.00	87.4 AV			3.31 V	183	41.4	46.0
3	#13130.00	61.1 PK	88.2	-27.1	1.55 V	210	50.8	10.3
4	#13130.00	48.0 AV	68.2	-20.2	1.55 V	210	37.7	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	92.5 PK			3.69 H	161	46.3	46.2
2	*6725.00	80.0 AV			3.69 H	161	33.8	46.2
3	#13450.00	62.2 PK	88.2	-26.0	2.21 H	68	50.2	12.0
4	#13450.00	49.0 AV	68.2	-19.2	2.21 H	68	37.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	98.2 PK			3.25 V	190	52.0	46.2
2	*6725.00	85.1 AV			3.25 V	190	38.9	46.2
3	#13450.00	62.6 PK	88.2	-25.6	1.43 V	258	50.6	12.0
4	#13450.00	49.5 AV	68.2	-18.7	1.43 V	258	37.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	94.9 PK			3.69 H	161	48.3	46.6
2	*6845.00	81.7 AV			3.69 H	161	35.1	46.6
3	#13690.00	62.6 PK	88.2	-25.6	2.43 H	75	50.5	12.1
4	#13690.00	49.5 AV	68.2	-18.7	2.43 H	75	37.4	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	99.2 PK			3.38 V	188	52.6	46.6
2	*6845.00	86.9 AV			3.38 V	188	40.3	46.6
3	#13690.00	62.8 PK	88.2	-25.4	1.40 V	243	50.7	12.1
4	#13690.00	49.7 AV	68.2	-18.5	1.40 V	243	37.6	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	94.1 PK			3.66 H	162	47.5	46.6
2	*6885.00	81.4 AV			3.66 H	162	34.8	46.6
3	#13770.00	62.5 PK	88.2	-25.7	2.41 H	66	50.2	12.3
4	#13770.00	49.3 AV	68.2	-18.9	2.41 H	66	37.0	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	99.7 PK			3.41 V	179	53.1	46.6
2	*6885.00	87.1 AV			3.41 V	179	40.5	46.6
3	#13770.00	62.8 PK	88.2	-25.4	1.46 V	251	50.5	12.3
4	#13770.00	49.5 AV	68.2	-18.7	1.46 V	251	37.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	92.5 PK			3.68 H	158	44.7	47.8
2	*7005.00	80.2 AV			3.68 H	158	32.4	47.8
3	#14010.00	63.0 PK	88.2	-25.2	2.32 H	69	50.5	12.5
4	#14010.00	49.8 AV	68.2	-18.4	2.32 H	69	37.3	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	99.2 PK			3.38 V	176	51.4	47.8
2	*7005.00	86.8 AV			3.38 V	176	39.0	47.8
3	#14010.00	63.2 PK	88.2	-25.0	1.32 V	248	50.7	12.5
4	#14010.00	50.1 AV	68.2	-18.1	1.32 V	248	37.6	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	94.4 PK			3.47 H	155	45.9	48.5
2	*7085.00	81.9 AV			3.47 H	155	33.4	48.5
3	#7125.00	54.3 PK	88.2	-33.9	3.47 H	155	42.2	12.1
4	#7125.00	41.1 AV	68.2	-27.1	3.47 H	155	29.0	12.1
5	#14170.00	62.9 PK	88.2	-25.3	2.18 H	79	50.3	12.6
6	#14170.00	49.7 AV	68.2	-18.5	2.18 H	79	37.1	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	100.5 PK			3.49 V	182	52.0	48.5
2	*7085.00	88.0 AV			3.49 V	182	39.5	48.5
3	#7125.00	54.6 PK	88.2	-33.6	3.49 V	182	42.5	12.1
4	#7125.00	41.3 AV	68.2	-26.9	3.49 V	182	29.2	12.1
5	#14170.00	63.0 PK	88.2	-25.2	1.59 V	242	50.4	12.6
6	#14170.00	49.9 AV	68.2	-18.3	1.59 V	242	37.3	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.7 PK	88.2	-38.5	3.47 H	146	43.0	6.7
2	#5925.00	36.2 AV	68.2	-32.0	3.47 H	146	29.5	6.7
3	*5985.00	91.1 PK			3.47 H	146	48.5	42.6
4	*5985.00	78.6 AV			3.47 H	146	36.0	42.6
5	11970.00	61.2 PK	74.0	-12.8	2.31 H	58	50.6	10.6
6	11970.00	48.0 AV	54.0	-6.0	2.31 H	58	37.4	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	2.98 V	189	44.8	6.7
2	#5925.00	37.9 AV	68.2	-30.3	2.98 V	189	31.2	6.7
3	*5985.00	96.5 PK			2.98 V	189	53.9	42.6
4	*5985.00	83.1 AV			2.98 V	189	40.5	42.6
5	11970.00	61.3 PK	74.0	-12.7	1.52 V	235	50.7	10.6
6	11970.00	48.2 AV	54.0	-5.8	1.52 V	235	37.6	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	93.5 PK			3.72 H	159	49.4	44.1
2	*6145.00	81.3 AV			3.72 H	159	37.2	44.1
3	12290.00	61.4 PK	74.0	-12.6	2.41 H	38	50.4	11.0
4	12290.00	48.3 AV	54.0	-5.7	2.41 H	38	37.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	98.0 PK			2.83 V	189	53.9	44.1
2	*6145.00	85.8 AV			2.83 V	189	41.7	44.1
3	12290.00	61.6 PK	74.0	-12.4	1.44 V	239	50.6	11.0
4	12290.00	48.4 AV	54.0	-5.6	1.44 V	239	37.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	95.8 PK			3.89 H	165	50.0	45.8
2	*6385.00	82.5 AV			3.89 H	165	36.7	45.8
3	#12770.00	60.8 PK	88.2	-27.4	2.32 H	45	50.3	10.5
4	#12770.00	47.5 AV	68.2	-20.7	2.32 H	45	37.0	10.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	98.9 PK			3.34 V	175	53.1	45.8
2	*6385.00	86.6 AV			3.34 V	175	40.8	45.8
3	#12770.00	61.0 PK	88.2	-27.2	1.56 V	241	50.5	10.5
4	#12770.00	47.8 AV	68.2	-20.4	1.56 V	241	37.3	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	96.3 PK			3.99 H	165	50.3	46.0
2	*6465.00	83.4 AV			3.99 H	165	37.4	46.0
3	#12930.00	61.3 PK	88.2	-26.9	2.21 H	69	50.9	10.4
4	#12930.00	48.1 AV	68.2	-20.1	2.21 H	69	37.7	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	99.8 PK			2.57 V	188	53.8	46.0
2	*6465.00	87.4 AV			2.57 V	188	41.4	46.0
3	#12930.00	61.1 PK	88.2	-27.1	1.41 V	236	50.7	10.4
4	#12930.00	48.0 AV	68.2	-20.2	1.41 V	236	37.6	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	93.2 PK			3.99 H	146	47.3	45.9
2	*6545.00	81.1 AV			3.99 H	146	35.2	45.9
3	#13090.00	60.9 PK	88.2	-27.3	2.13 H	79	50.6	10.3
4	#13090.00	47.8 AV	68.2	-20.4	2.13 H	79	37.5	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	99.1 PK			3.81 V	175	53.2	45.9
2	*6545.00	87.1 AV			3.81 V	175	41.2	45.9
3	#13090.00	60.6 PK	88.2	-27.6	1.32 V	228	50.3	10.3
4	#13090.00	47.4 AV	68.2	-20.8	1.32 V	228	37.1	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	95.2 PK			3.84 H	163	48.9	46.3
2	*6705.00	81.5 AV			3.84 H	163	35.2	46.3
3	#13410.00	61.7 PK	88.2	-26.5	2.18 H	83	50.2	11.5
4	#13410.00	48.5 AV	68.2	-19.7	2.18 H	83	37.0	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	99.5 PK			2.79 V	184	53.2	46.3
2	*6705.00	86.7 AV			2.79 V	184	40.4	46.3
3	#13410.00	61.9 PK	88.2	-26.3	1.46 V	221	50.4	11.5
4	#13410.00	48.7 AV	68.2	-19.5	1.46 V	221	37.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	94.5 PK			3.66 H	161	47.9	46.6
2	*6865.00	81.7 AV			3.66 H	161	35.1	46.6
3	#13730.00	62.5 PK	88.2	-25.7	2.34 H	95	50.3	12.2
4	#13730.00	49.4 AV	68.2	-18.8	2.34 H	95	37.2	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	99.6 PK			3.71 V	174	53.0	46.6
2	*6865.00	87.2 AV			3.71 V	174	40.6	46.6
3	#13730.00	62.2 PK	88.2	-26.0	1.32 V	228	50.0	12.2
4	#13730.00	49.3 AV	68.2	-18.9	1.32 V	228	37.1	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	94.0 PK			3.30 H	162	46.9	47.1
2	*6945.00	81.1 AV			3.30 H	162	34.0	47.1
3	#13890.00	62.2 PK	88.2	-26.0	2.24 H	93	50.2	12.0
4	#13890.00	49.1 AV	68.2	-19.1	2.24 H	93	37.1	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	100.7 PK			3.31 V	178	53.6	47.1
2	*6945.00	87.6 AV			3.31 V	178	40.5	47.1
3	#13890.00	62.6 PK	88.2	-25.6	1.48 V	210	50.6	12.0
4	#13890.00	49.5 AV	68.2	-18.7	1.48 V	210	37.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	93.6 PK			3.51 H	160	45.6	48.0
2	*7025.00	81.2 AV			3.51 H	160	33.2	48.0
3	#7125.00	54.5 PK	88.2	-33.7	3.51 H	160	42.4	12.1
4	#7125.00	41.2 AV	68.2	-27.0	3.51 H	160	29.1	12.1
5	#14050.00	62.8 PK	88.2	-25.4	2.16 H	96	50.4	12.4
6	#14050.00	49.8 AV	68.2	-18.4	2.16 H	96	37.4	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	100.1 PK			3.37 V	178	52.1	48.0
2	*7025.00	87.8 AV			3.37 V	178	39.8	48.0
3	#7125.00	54.7 PK	88.2	-33.5	3.37 V	178	42.6	12.1
4	#7125.00	41.5 AV	68.2	-26.7	3.37 V	178	29.4	12.1
5	#14050.00	63.2 PK	88.2	-25.0	1.42 V	225	50.8	12.4
6	#14050.00	50.0 AV	68.2	-18.2	1.42 V	225	37.6	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	4.00 H	161	44.5	6.7
2	#5925.00	37.5 AV	68.2	-30.7	4.00 H	161	30.8	6.7
3	*6025.00	93.9 PK			4.00 H	161	51.2	42.7
4	*6025.00	80.8 AV			4.00 H	161	38.1	42.7
5	12050.00	61.3 PK	74.0	-12.7	2.96 H	324	50.5	10.8
6	12050.00	48.3 AV	54.0	-5.7	2.96 H	324	37.5	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	3.00 V	187	44.9	6.7
2	#5925.00	38.2 AV	68.2	-30.0	3.00 V	187	31.5	6.7
3	*6025.00	95.7 PK			3.00 V	187	53.0	42.7
4	*6025.00	82.4 AV			3.00 V	187	39.7	42.7
5	12050.00	61.8 PK	74.0	-12.2	1.13 V	69	51.0	10.8
6	12050.00	48.5 AV	54.0	-5.5	1.13 V	69	37.7	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	94.4 PK			4.00 H	148	49.4	45.0
2	*6185.00	82.5 AV			4.00 H	148	37.5	45.0
3	12370.00	61.2 PK	74.0	-12.8	2.10 H	331	50.8	10.4
4	12370.00	47.8 AV	54.0	-6.2	2.10 H	331	37.4	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	95.8 PK			3.00 V	187	50.8	45.0
2	*6185.00	84.1 AV			3.00 V	187	39.1	45.0
3	12370.00	61.5 PK	74.0	-12.5	1.91 V	142	51.1	10.4
4	12370.00	48.2 AV	54.0	-5.8	1.91 V	142	37.8	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	95.0 PK			4.00 H	149	49.4	45.6
2	*6345.00	83.3 AV			4.00 H	149	37.7	45.6
3	12690.00	61.1 PK	74.0	-12.9	2.55 H	285	50.5	10.6
4	12690.00	48.6 AV	54.0	-5.4	2.55 H	285	38.0	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.6 PK			3.00 V	187	51.0	45.6
2	*6345.00	84.9 AV			3.00 V	187	39.3	45.6
3	12690.00	61.4 PK	74.0	-12.6	1.83 V	5	50.8	10.6
4	12690.00	48.9 AV	54.0	-5.1	1.83 V	5	38.3	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	93.8 PK			4.00 H	148	47.9	45.9
2	*6505.00	81.5 AV			4.00 H	148	35.6	45.9
3	#13010.00	61.1 PK	88.2	-27.1	2.52 H	97	50.7	10.4
4	#13010.00	47.7 AV	68.2	-20.5	2.52 H	97	37.3	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	95.4 PK			3.00 V	199	49.5	45.9
2	*6505.00	83.1 AV			3.00 V	199	37.2	45.9
3	#13010.00	61.4 PK	88.2	-26.8	1.49 V	142	51.0	10.4
4	#13010.00	48.1 AV	68.2	-20.1	1.49 V	142	37.7	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	94.4 PK			4.00 H	149	48.2	46.2
2	*6665.00	82.7 AV			4.00 H	149	36.5	46.2
3	13330.00	61.4 PK	74.0	-12.6	3.62 H	174	50.5	10.9
4	13330.00	48.4 AV	54.0	-5.6	3.62 H	174	37.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.0 PK			3.00 V	201	49.8	46.2
2	*6665.00	84.3 AV			3.00 V	201	38.1	46.2
3	13330.00	62.0 PK	74.0	-12.0	1.45 V	167	51.1	10.9
4	13330.00	48.8 AV	54.0	-5.2	1.45 V	167	37.9	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	96.0 PK			4.00 H	106	49.5	46.5
2	*6825.00	83.7 AV			4.00 H	106	37.2	46.5
3	#13650.00	62.6 PK	88.2	-25.6	2.95 H	24	50.4	12.2
4	#13650.00	50.0 AV	68.2	-18.2	2.95 H	24	37.8	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	97.9 PK			3.00 V	184	51.4	46.5
2	*6825.00	85.6 AV			3.00 V	184	39.1	46.5
3	#13650.00	63.2 PK	88.2	-25.0	1.31 V	337	51.0	12.2
4	#13650.00	50.5 AV	68.2	-17.7	1.31 V	337	38.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	97.2 PK			4.00 H	109	49.5	47.7
2	*6985.00	84.8 AV			4.00 H	109	37.1	47.7
3	#7125.00	54.3 PK	88.2	-33.9	4.00 H	109	42.2	12.1
4	#7125.00	42.0 AV	68.2	-26.2	4.00 H	109	29.9	12.1
5	#13970.00	62.7 PK	88.2	-25.5	2.68 H	108	50.4	12.3
6	#13970.00	49.9 AV	68.2	-18.3	2.68 H	108	37.6	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	99.5 PK			3.14 V	189	51.8	47.7
2	*6985.00	87.4 AV			3.14 V	189	39.7	47.7
3	#7125.00	55.1 PK	88.2	-33.1	3.14 V	189	43.0	12.1
4	#7125.00	42.6 AV	68.2	-25.6	3.14 V	189	30.5	12.1
5	#13970.00	63.1 PK	88.2	-25.1	2.72 V	355	50.8	12.3
6	#13970.00	50.1 AV	68.2	-18.1	2.72 V	355	37.8	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.7 PK	88.2	-38.5	3.72 H	167	43.0	6.7
2	#5925.00	35.8 AV	68.2	-32.4	3.72 H	167	29.1	6.7
3	*5955.00	94.8 PK			3.72 H	167	52.2	42.6
4	*5955.00	82.0 AV			3.72 H	167	39.4	42.6
5	11910.00	61.0 PK	74.0	-13.0	1.25 H	204	50.4	10.6
6	11910.00	47.8 AV	54.0	-6.2	1.25 H	204	37.2	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.8 PK	88.2	-38.4	3.41 V	189	43.1	6.7
2	#5925.00	36.0 AV	68.2	-32.2	3.41 V	189	29.3	6.7
3	*5955.00	95.2 PK			3.41 V	189	52.6	42.6
4	*5955.00	82.6 AV			3.41 V	189	40.0	42.6
5	11910.00	61.2 PK	74.0	-12.8	2.13 V	78	50.6	10.6
6	11910.00	48.1 AV	54.0	-5.9	2.13 V	78	37.5	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.3 PK			3.75 H	136	49.3	46.0
2	*6415.00	83.4 AV			3.75 H	136	37.4	46.0
3	#12830.00	60.9 PK	88.2	-27.3	1.15 H	201	50.3	10.6
4	#12830.00	47.7 AV	68.2	-20.5	1.15 H	201	37.1	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	100.0 PK			3.82 V	196	54.0	46.0
2	*6415.00	86.5 AV			3.82 V	196	40.5	46.0
3	#12830.00	61.1 PK	88.2	-27.1	2.25 V	65	50.5	10.6
4	#12830.00	47.9 AV	68.2	-20.3	2.25 V	65	37.3	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	95.4 PK			4.00 H	130	49.4	46.0
2	*6435.00	83.5 AV			4.00 H	130	37.5	46.0
3	#12870.00	61.1 PK	88.2	-27.1	1.21 H	215	50.5	10.6
4	#12870.00	47.9 AV	68.2	-20.3	1.21 H	215	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.0 PK			3.99 V	190	53.0	46.0
2	*6435.00	86.2 AV			3.99 V	190	40.2	46.0
3	#12870.00	61.3 PK	88.2	-26.9	2.18 V	74	50.7	10.6
4	#12870.00	48.2 AV	68.2	-20.0	2.18 V	74	37.6	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.7 PK			3.99 H	135	48.8	45.9
2	*6515.00	82.4 AV			3.99 H	135	36.5	45.9
3	#13030.00	61.0 PK	88.2	-27.2	1.26 H	225	50.6	10.4
4	#13030.00	47.8 AV	68.2	-20.4	1.26 H	225	37.4	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	98.6 PK			3.70 V	195	52.7	45.9
2	*6515.00	85.7 AV			3.70 V	195	39.8	45.9
3	#13030.00	61.2 PK	88.2	-27.0	2.27 V	58	50.8	10.4
4	#13030.00	48.0 AV	68.2	-20.2	2.27 V	58	37.6	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.1 PK			4.00 H	135	48.2	45.9
2	*6535.00	81.8 AV			4.00 H	135	35.9	45.9
3	#13070.00	60.6 PK	88.2	-27.6	1.26 H	218	50.4	10.2
4	#13070.00	47.5 AV	68.2	-20.7	1.26 H	218	37.3	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.5 PK			4.00 V	194	51.6	45.9
2	*6535.00	84.7 AV			4.00 V	194	38.8	45.9
3	#13070.00	60.8 PK	88.2	-27.4	2.13 V	61	50.6	10.2
4	#13070.00	47.7 AV	68.2	-20.5	2.13 V	61	37.5	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.2 PK			3.79 H	127	47.6	46.6
2	*6855.00	82.3 AV			3.79 H	127	35.7	46.6
3	#13710.00	62.7 PK	88.2	-25.5	1.35 H	202	50.5	12.2
4	#13710.00	49.4 AV	68.2	-18.8	1.35 H	202	37.2	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	98.6 PK			3.77 V	174	52.0	46.6
2	*6855.00	86.3 AV			3.77 V	174	39.7	46.6
3	#13710.00	63.0 PK	88.2	-25.2	2.26 V	65	50.8	12.2
4	#13710.00	49.8 AV	68.2	-18.4	2.26 V	65	37.6	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	95.2 PK			4.00 H	108	47.4	47.8
2	*6995.00	82.2 AV			4.00 H	108	34.4	47.8
3	#13990.00	62.8 PK	88.2	-25.4	1.20 H	221	50.4	12.4
4	#13990.00	49.4 AV	68.2	-18.8	1.20 H	221	37.0	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.3 PK			3.99 V	175	50.5	47.8
2	*6995.00	85.8 AV			3.99 V	175	38.0	47.8
3	#13990.00	63.0 PK	88.2	-25.2	2.13 V	71	50.6	12.4
4	#13990.00	49.9 AV	68.2	-18.3	2.13 V	71	37.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.9 PK			1.45 H	204	46.2	48.7
2	*7115.00	82.0 AV			1.45 H	204	33.3	48.7
3	#7125.00	80.8 PK	88.2	-7.4	1.45 H	204	68.7	12.1
4	#7125.00	64.2 AV	68.2	-4.0	1.45 H	204	52.1	12.1
5	#14230.00	63.3 PK	88.2	-24.9	1.26 H	235	50.5	12.8
6	#14230.00	50.1 AV	68.2	-18.1	1.26 H	235	37.3	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.6 PK			4.00 V	187	49.9	48.7
2	*7115.00	85.8 AV			4.00 V	187	37.1	48.7
3	#7125.00	84.8 PK	88.2	-3.4	4.00 V	187	72.7	12.1
4	#7125.00	68.0 AV	68.2	-0.2	4.00 V	187	55.9	12.1
5	#14230.00	63.6 PK	88.2	-24.6	2.21 V	63	50.8	12.8
6	#14230.00	50.4 AV	68.2	-17.8	2.21 V	63	37.6	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.4 PK	88.2	-38.8	3.69 H	166	42.7	6.7
2	#5925.00	38.5 AV	68.2	-29.7	3.69 H	166	31.8	6.7
3	*5955.00	94.1 PK			3.69 H	166	51.5	42.6
4	*5955.00	82.0 AV			3.69 H	166	39.4	42.6
5	11910.00	61.0 PK	74.0	-13.0	1.36 H	248	50.4	10.6
6	11910.00	47.8 AV	54.0	-6.2	1.36 H	248	37.2	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.7 PK	88.2	-38.5	3.34 V	178	43.0	6.7
2	#5925.00	35.9 AV	68.2	-32.3	3.34 V	178	29.2	6.7
3	*5955.00	94.1 PK			3.34 V	178	51.5	42.6
4	*5955.00	81.0 AV			3.34 V	178	38.4	42.6
5	11910.00	61.3 PK	74.0	-12.7	2.12 V	65	50.7	10.6
6	11910.00	48.2 AV	54.0	-5.8	2.12 V	65	37.6	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	97.3 PK			4.00 H	121	51.3	46.0
2	*6415.00	83.8 AV			4.00 H	121	37.8	46.0
3	#12830.00	60.7 PK	88.2	-27.5	1.32 H	258	50.1	10.6
4	#12830.00	47.6 AV	68.2	-20.6	1.32 H	258	37.0	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	98.9 PK			3.82 V	196	52.9	46.0
2	*6415.00	85.6 AV			3.82 V	196	39.6	46.0
3	#12830.00	61.0 PK	88.2	-27.2	2.10 V	68	50.4	10.6
4	#12830.00	47.8 AV	68.2	-20.4	2.10 V	68	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.8 PK			4.00 H	122	50.8	46.0
2	*6435.00	83.6 AV			4.00 H	122	37.6	46.0
3	#12870.00	61.0 PK	88.2	-27.2	1.21 H	241	50.4	10.6
4	#12870.00	47.9 AV	68.2	-20.3	1.21 H	241	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.6 PK			4.00 V	191	52.6	46.0
2	*6435.00	86.3 AV			4.00 V	191	40.3	46.0
3	#12870.00	61.4 PK	88.2	-26.8	2.24 V	73	50.8	10.6
4	#12870.00	48.2 AV	68.2	-20.0	2.24 V	73	37.6	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.5 PK			3.71 H	101	49.6	45.9
2	*6515.00	82.7 AV			3.71 H	101	36.8	45.9
3	#13030.00	60.9 PK	88.2	-27.3	1.26 H	232	50.5	10.4
4	#13030.00	47.7 AV	68.2	-20.5	1.26 H	232	37.3	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.5 PK			3.70 V	193	51.6	45.9
2	*6515.00	84.8 AV			3.70 V	193	38.9	45.9
3	#13030.00	61.1 PK	88.2	-27.1	2.14 V	65	50.7	10.4
4	#13030.00	47.8 AV	68.2	-20.4	2.14 V	65	37.4	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.9 PK			3.68 H	101	50.0	45.9
2	*6535.00	82.6 AV			3.68 H	101	36.7	45.9
3	#13070.00	60.6 PK	88.2	-27.6	1.35 H	238	50.4	10.2
4	#13070.00	47.4 AV	68.2	-20.8	1.35 H	238	37.2	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	98.1 PK			3.85 V	192	52.2	45.9
2	*6535.00	84.9 AV			3.85 V	192	39.0	45.9
3	#13070.00	61.0 PK	88.2	-27.2	2.16 V	72	50.8	10.2
4	#13070.00	47.9 AV	68.2	-20.3	2.16 V	72	37.7	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.9 PK			4.00 H	109	49.3	46.6
2	*6855.00	82.7 AV			4.00 H	109	36.1	46.6
3	#13710.00	62.7 PK	88.2	-25.5	2.09 H	78	50.5	12.2
4	#13710.00	49.5 AV	68.2	-18.7	2.09 H	78	37.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	98.5 PK			3.36 V	185	51.9	46.6
2	*6855.00	85.6 AV			3.36 V	185	39.0	46.6
3	#13710.00	62.8 PK	88.2	-25.4	2.02 V	76	50.6	12.2
4	#13710.00	49.7 AV	68.2	-18.5	2.02 V	76	37.5	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	95.2 PK			4.00 H	109	47.4	47.8
2	*6995.00	82.8 AV			4.00 H	109	35.0	47.8
3	#13990.00	62.9 PK	88.2	-25.3	1.45 H	233	50.5	12.4
4	#13990.00	49.8 AV	68.2	-18.4	1.45 H	233	37.4	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.0 PK			4.00 V	176	50.2	47.8
2	*6995.00	85.6 AV			4.00 V	176	37.8	47.8
3	#13990.00	63.0 PK	88.2	-25.2	2.23 V	68	50.6	12.4
4	#13990.00	49.8 AV	68.2	-18.4	2.23 V	68	37.4	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.0 PK			1.45 H	203	44.3	48.7
2	*7115.00	80.4 AV			1.45 H	203	31.7	48.7
3	#7125.00	76.4 PK	88.2	-11.8	1.45 H	203	64.3	12.1
4	#7125.00	62.4 AV	68.2	-5.8	1.45 H	203	50.3	12.1
5	#14230.00	63.1 PK	88.2	-25.1	1.38 H	232	50.3	12.8
6	#14230.00	50.0 AV	68.2	-18.2	1.38 H	232	37.2	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	96.7 PK			4.00 V	186	48.0	48.7
2	*7115.00	84.4 AV			4.00 V	186	35.7	48.7
3	#7125.00	78.0 PK	88.2	-10.2	4.00 V	186	65.9	12.1
4	#7125.00	63.2 AV	68.2	-5.0	4.00 V	186	51.1	12.1
5	#14230.00	63.6 PK	88.2	-24.6	2.16 V	76	50.8	12.8
6	#14230.00	50.5 AV	68.2	-17.7	2.16 V	76	37.7	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.7 PK	88.2	-38.5	3.72 H	165	43.0	6.7
2	#5925.00	36.0 AV	68.2	-32.2	3.72 H	165	29.3	6.7
3	*5955.00	92.9 PK			3.72 H	165	50.3	42.6
4	*5955.00	80.7 AV			3.72 H	165	38.1	42.6
5	11910.00	61.1 PK	74.0	-12.9	2.71 H	172	50.5	10.6
6	11910.00	47.7 AV	54.0	-6.3	2.71 H	172	37.1	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.9 PK	88.2	-38.3	3.41 V	189	43.2	6.7
2	#5925.00	36.2 AV	68.2	-32.0	3.41 V	189	29.5	6.7
3	*5955.00	93.7 PK			3.41 V	189	51.1	42.6
4	*5955.00	81.5 AV			3.41 V	189	38.9	42.6
5	11910.00	61.4 PK	74.0	-12.6	3.59 V	128	50.8	10.6
6	11910.00	48.0 AV	54.0	-6.0	3.59 V	128	37.4	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	97.0 PK			3.70 H	166	51.0	46.0
2	*6415.00	83.8 AV			3.70 H	166	37.8	46.0
3	#12830.00	61.1 PK	88.2	-27.1	1.60 H	271	50.5	10.6
4	#12830.00	47.9 AV	68.2	-20.3	1.60 H	271	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	97.8 PK			3.43 V	186	51.8	46.0
2	*6415.00	84.6 AV			3.43 V	186	38.6	46.0
3	#12830.00	61.6 PK	88.2	-26.6	2.24 V	220	51.0	10.6
4	#12830.00	48.1 AV	68.2	-20.1	2.24 V	220	37.5	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	97.6 PK			3.72 H	168	51.6	46.0
2	*6435.00	84.2 AV			3.72 H	168	38.2	46.0
3	#12870.00	60.8 PK	88.2	-27.4	1.52 H	104	50.2	10.6
4	#12870.00	48.4 AV	68.2	-19.8	1.52 H	104	37.8	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.4 PK			3.43 V	199	52.4	46.0
2	*6435.00	85.0 AV			3.43 V	199	39.0	46.0
3	#12870.00	61.1 PK	88.2	-27.1	3.70 V	156	50.5	10.6
4	#12870.00	48.7 AV	68.2	-19.5	3.70 V	156	38.1	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.8 PK			3.70 H	168	50.9	45.9
2	*6515.00	83.7 AV			3.70 H	168	37.8	45.9
3	#13030.00	61.1 PK	88.2	-27.1	2.94 H	126	50.7	10.4
4	#13030.00	48.0 AV	68.2	-20.2	2.94 H	126	37.6	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.6 PK			3.43 V	198	51.7	45.9
2	*6515.00	84.5 AV			3.43 V	198	38.6	45.9
3	#13030.00	61.5 PK	88.2	-26.7	2.56 V	90	51.1	10.4
4	#13030.00	48.3 AV	68.2	-19.9	2.56 V	90	37.9	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.1 PK			3.71 H	166	51.2	45.9
2	*6535.00	84.0 AV			3.71 H	166	38.1	45.9
3	#13070.00	60.8 PK	88.2	-27.4	1.54 H	339	50.6	10.2
4	#13070.00	48.2 AV	68.2	-20.0	1.54 H	339	38.0	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.9 PK			3.43 V	199	52.0	45.9
2	*6535.00	84.8 AV			3.43 V	199	38.9	45.9
3	#13070.00	61.0 PK	88.2	-27.2	3.05 V	36	50.8	10.2
4	#13070.00	48.5 AV	68.2	-19.7	3.05 V	36	38.3	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.5 PK			3.70 H	165	50.9	46.6
2	*6855.00	84.3 AV			3.70 H	165	37.7	46.6
3	#13710.00	62.9 PK	88.2	-25.3	2.53 H	186	50.7	12.2
4	#13710.00	49.4 AV	68.2	-18.8	2.53 H	186	37.2	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	98.3 PK			3.43 V	199	51.7	46.6
2	*6855.00	85.1 AV			3.43 V	199	38.5	46.6
3	#13710.00	63.3 PK	88.2	-24.9	1.29 V	109	51.1	12.2
4	#13710.00	49.8 AV	68.2	-18.4	1.29 V	109	37.6	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	97.6 PK			3.70 H	166	49.8	47.8
2	*6995.00	84.7 AV			3.70 H	166	36.9	47.8
3	#13990.00	63.4 PK	88.2	-24.8	2.51 H	115	51.0	12.4
4	#13990.00	50.3 AV	68.2	-17.9	2.51 H	115	37.9	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.4 PK			3.43 V	196	50.6	47.8
2	*6995.00	85.5 AV			3.43 V	196	37.7	47.8
3	#13990.00	63.7 PK	88.2	-24.5	1.14 V	8	51.3	12.4
4	#13990.00	50.6 AV	68.2	-17.6	1.14 V	8	38.2	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.1 PK			3.77 H	110	49.4	48.7
2	*7115.00	85.2 AV			3.77 H	110	36.5	48.7
3	#7125.00	80.5 PK	88.2	-7.7	3.77 H	110	68.4	12.1
4	#7125.00	64.8 AV	68.2	-3.4	3.77 H	110	52.7	12.1
5	#14230.00	62.9 PK	88.2	-25.3	3.85 H	224	50.1	12.8
6	#14230.00	50.0 AV	68.2	-18.2	3.85 H	224	37.2	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.9 PK			3.43 V	191	50.2	48.7
2	*7115.00	86.0 AV			3.43 V	191	37.3	48.7
3	#7125.00	82.6 PK	88.2	-5.6	3.43 V	191	70.5	12.1
4	#7125.00	67.6 AV	68.2	-0.6	3.43 V	191	55.5	12.1
5	#14230.00	63.4 PK	88.2	-24.8	1.05 V	243	50.6	12.8
6	#14230.00	50.2 AV	68.2	-18.0	1.05 V	243	37.4	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B

1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.8 PK	88.2	-38.4	1.57 H	130	43.1	6.7
2	#5925.00	36.5 AV	68.2	-31.7	1.57 H	130	29.8	6.7
3	*5955.00	95.2 PK			1.57 H	130	52.6	42.6
4	*5955.00	85.2 AV			1.57 H	130	42.6	42.6
5	11910.00	61.4 PK	74.0	-12.6	1.03 H	228	50.8	10.6
6	11910.00	48.1 AV	54.0	-5.9	1.03 H	228	37.5	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.3 PK	88.2	-38.9	2.32 V	198	42.6	6.7
2	#5925.00	36.4 AV	68.2	-31.8	2.32 V	198	29.7	6.7
3	*5955.00	94.3 PK			2.32 V	198	51.7	42.6
4	*5955.00	84.3 AV			2.32 V	198	41.7	42.6
5	11910.00	61.2 PK	74.0	-12.8	1.43 V	318	50.6	10.6
6	11910.00	48.0 AV	54.0	-6.0	1.43 V	318	37.4	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	97.5 PK			1.57 H	130	52.8	44.7
2	*6175.00	86.7 AV			1.57 H	130	42.0	44.7
3	12350.00	61.3 PK	74.0	-12.7	1.08 H	219	50.7	10.6
4	12350.00	48.0 AV	54.0	-6.0	1.08 H	219	37.4	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	96.5 PK			2.37 V	218	51.8	44.7
2	*6175.00	85.7 AV			2.37 V	218	41.0	44.7
3	12350.00	60.9 PK	74.0	-13.1	1.56 V	325	50.3	10.6
4	12350.00	47.8 AV	54.0	-6.2	1.56 V	325	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.7 PK			1.55 H	129	49.7	46.0
2	*6415.00	85.1 AV			1.55 H	129	39.1	46.0
3	#12830.00	61.2 PK	88.2	-27.0	2.74 H	193	50.6	10.6
4	#12830.00	48.1 AV	68.2	-20.1	2.74 H	193	37.5	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.0 PK			2.25 V	209	49.0	46.0
2	*6415.00	84.9 AV			2.25 V	209	38.9	46.0
3	#12830.00	61.0 PK	88.2	-27.2	1.43 V	315	50.4	10.6
4	#12830.00	48.0 AV	68.2	-20.2	1.43 V	315	37.4	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	95.7 PK			1.53 H	131	49.7	46.0
2	*6435.00	85.6 AV			1.53 H	131	39.6	46.0
3	#12870.00	61.0 PK	88.2	-27.2	2.64 H	195	50.4	10.6
4	#12870.00	47.9 AV	68.2	-20.3	2.64 H	195	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.4 PK			2.30 V	206	48.4	46.0
2	*6435.00	84.3 AV			2.30 V	206	38.3	46.0
3	#12870.00	61.0 PK	88.2	-27.2	1.06 V	65	50.4	10.6
4	#12870.00	47.7 AV	68.2	-20.5	1.06 V	65	37.1	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	96.8 PK			1.58 H	135	50.8	46.0
2	*6475.00	86.0 AV			1.58 H	135	40.0	46.0
3	#12950.00	61.2 PK	88.2	-27.0	2.47 H	188	50.8	10.4
4	#12950.00	48.0 AV	68.2	-20.2	2.47 H	188	37.6	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	95.7 PK			2.28 V	208	49.7	46.0
2	*6475.00	85.3 AV			2.28 V	208	39.3	46.0
3	#12950.00	61.0 PK	88.2	-27.2	1.16 V	78	50.6	10.4
4	#12950.00	47.8 AV	68.2	-20.4	1.16 V	78	37.4	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.7 PK			2.44 H	146	53.8	45.9
2	*6515.00	89.3 AV			2.44 H	146	43.4	45.9
3	#13030.00	61.0 PK	88.2	-27.2	2.35 H	182	50.6	10.4
4	#13030.00	47.8 AV	68.2	-20.4	2.35 H	182	37.4	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.5 PK			2.25 V	210	50.6	45.9
2	*6515.00	85.3 AV			2.25 V	210	39.4	45.9
3	#13030.00	60.8 PK	88.2	-27.4	1.26 V	68	50.4	10.4
4	#13030.00	47.5 AV	68.2	-20.7	1.26 V	68	37.1	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	100.9 PK			2.56 H	144	55.0	45.9
2	*6535.00	90.5 AV			2.56 H	144	44.6	45.9
3	#13070.00	61.0 PK	88.2	-27.2	1.65 H	204	50.8	10.2
4	#13070.00	47.7 AV	68.2	-20.5	1.65 H	204	37.5	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.6 PK			2.18 V	207	49.7	45.9
2	*6535.00	85.4 AV			2.18 V	207	39.5	45.9
3	#13070.00	60.8 PK	88.2	-27.4	1.24 V	76	50.6	10.2
4	#13070.00	47.6 AV	68.2	-20.6	1.24 V	76	37.4	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	98.7 PK			2.48 H	144	52.4	46.3
2	*6695.00	88.2 AV			2.48 H	144	41.9	46.3
3	13390.00	62.0 PK	74.0	-12.0	1.74 H	216	50.7	11.3
4	13390.00	48.6 AV	54.0	-5.4	1.74 H	216	37.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	93.6 PK			1.99 V	119	47.3	46.3
2	*6695.00	83.5 AV			1.99 V	119	37.2	46.3
3	13390.00	61.7 PK	74.0	-12.3	1.26 V	72	50.4	11.3
4	13390.00	48.4 AV	54.0	-5.6	1.26 V	72	37.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	96.3 PK			2.48 H	143	49.7	46.6
2	*6855.00	86.0 AV			2.48 H	143	39.4	46.6
3	#13710.00	63.0 PK	88.2	-25.2	1.68 H	224	50.8	12.2
4	#13710.00	49.9 AV	68.2	-18.3	1.68 H	224	37.7	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.9 PK			2.37 V	156	48.3	46.6
2	*6855.00	84.4 AV			2.37 V	156	37.8	46.6
3	#13710.00	62.8 PK	88.2	-25.4	1.23 V	67	50.6	12.2
4	#13710.00	49.6 AV	68.2	-18.6	1.23 V	67	37.4	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.3 PK			2.48 H	143	48.7	46.6
2	*6875.00	85.1 AV			2.48 H	143	38.5	46.6
3	#13750.00	62.6 PK	88.2	-25.6	1.54 H	216	50.5	12.1
4	#13750.00	49.6 AV	68.2	-18.6	1.54 H	216	37.5	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	94.6 PK			2.36 V	156	48.0	46.6
2	*6875.00	83.7 AV			2.36 V	156	37.1	46.6
3	#13750.00	62.4 PK	88.2	-25.8	1.15 V	62	50.3	12.1
4	#13750.00	49.3 AV	68.2	-18.9	1.15 V	62	37.2	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	96.2 PK			2.95 H	143	48.4	47.8
2	*6995.00	85.8 AV			2.95 H	143	38.0	47.8
3	#13990.00	63.3 PK	88.2	-24.9	1.75 H	229	50.9	12.4
4	#13990.00	50.0 AV	68.2	-18.2	1.75 H	229	37.6	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	95.2 PK			2.34 V	158	47.4	47.8
2	*6995.00	84.7 AV			2.34 V	158	36.9	47.8
3	#13990.00	63.1 PK	88.2	-25.1	1.12 V	65	50.7	12.4
4	#13990.00	49.9 AV	68.2	-18.3	1.12 V	65	37.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.5 PK			2.93 H	143	45.8	48.7
2	*7115.00	83.6 AV			2.93 H	143	34.9	48.7
3	#7125.00	73.2 PK	88.2	-15.0	2.93 H	143	61.1	12.1
4	#7125.00	47.5 AV	68.2	-20.7	2.93 H	143	35.4	12.1
5	#14230.00	64.1 PK	88.2	-24.1	1.69 H	213	51.3	12.8
6	#14230.00	50.9 AV	68.2	-17.3	1.69 H	213	38.1	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.5 PK			2.28 V	152	44.8	48.7
2	*7115.00	83.2 AV			2.28 V	152	34.5	48.7
3	#7125.00	73.2 PK	88.2	-15.0	2.28 V	152	61.1	12.1
4	#7125.00	47.8 AV	68.2	-20.4	2.28 V	152	35.7	12.1
5	#14230.00	63.7 PK	88.2	-24.5	1.09 V	59	50.9	12.8
6	#14230.00	50.6 AV	68.2	-17.6	1.09 V	59	37.8	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.2 PK	88.2	-32.0	1.51 H	131	49.5	6.7
2	#5925.00	40.2 AV	68.2	-28.0	1.51 H	131	33.5	6.7
3	*6025.00	97.5 PK			1.51 H	131	54.8	42.7
4	*6025.00	84.2 AV			1.51 H	131	41.5	42.7
5	12050.00	61.4 PK	74.0	-12.6	1.63 H	227	50.6	10.8
6	12050.00	48.3 AV	54.0	-5.7	1.63 H	227	37.5	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.3 PK	88.2	-32.9	2.39 V	208	48.6	6.7
2	#5925.00	39.1 AV	68.2	-29.1	2.39 V	208	32.4	6.7
3	*6025.00	97.2 PK			2.39 V	208	54.5	42.7
4	*6025.00	83.1 AV			2.39 V	208	40.4	42.7
5	12050.00	61.6 PK	74.0	-12.4	1.16 V	73	50.8	10.8
6	12050.00	48.4 AV	54.0	-5.6	1.16 V	73	37.6	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	99.7 PK			1.48 H	131	54.7	45.0
2	*6185.00	86.5 AV			1.48 H	131	41.5	45.0
3	12370.00	61.3 PK	74.0	-12.7	1.58 H	214	50.9	10.4
4	12370.00	48.0 AV	54.0	-6.0	1.58 H	214	37.6	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	99.2 PK			2.38 V	211	54.2	45.0
2	*6185.00	86.1 AV			2.38 V	211	41.1	45.0
3	12370.00	61.0 PK	74.0	-13.0	1.26 V	81	50.6	10.4
4	12370.00	47.8 AV	54.0	-6.2	1.26 V	81	37.4	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	99.0 PK			1.57 H	131	53.4	45.6
2	*6345.00	86.5 AV			1.57 H	131	40.9	45.6
3	12690.00	61.2 PK	74.0	-12.8	1.02 H	279	50.6	10.6
4	12690.00	48.1 AV	54.0	-5.9	1.02 H	279	37.5	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	98.8 PK			2.35 V	210	53.2	45.6
2	*6345.00	86.3 AV			2.35 V	210	40.7	45.6
3	12690.00	61.0 PK	74.0	-13.0	1.78 V	73	50.4	10.6
4	12690.00	47.8 AV	54.0	-6.2	1.78 V	73	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.7 PK			2.52 H	146	54.8	45.9
2	*6505.00	87.8 AV			2.52 H	146	41.9	45.9
3	#13010.00	60.9 PK	88.2	-27.3	1.14 H	257	50.5	10.4
4	#13010.00	47.6 AV	68.2	-20.6	1.14 H	257	37.2	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	96.5 PK			2.46 V	165	50.6	45.9
2	*6505.00	83.3 AV			2.46 V	165	37.4	45.9
3	#13010.00	60.7 PK	88.2	-27.5	1.65 V	69	50.3	10.4
4	#13010.00	47.4 AV	68.2	-20.8	1.65 V	69	37.0	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.1 PK			2.51 H	147	55.9	46.2
2	*6665.00	89.1 AV			2.51 H	147	42.9	46.2
3	13330.00	61.6 PK	74.0	-12.4	1.23 H	263	50.7	10.9
4	13330.00	48.4 AV	54.0	-5.6	1.23 H	263	37.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	98.7 PK			2.48 V	162	52.5	46.2
2	*6665.00	84.8 AV			2.48 V	162	38.6	46.2
3	13330.00	61.3 PK	74.0	-12.7	1.52 V	53	50.4	10.9
4	13330.00	48.1 AV	54.0	-5.9	1.52 V	53	37.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	96.9 PK			2.46 H	140	50.4	46.5
2	*6825.00	83.5 AV			2.46 H	140	37.0	46.5
3	#13650.00	62.6 PK	88.2	-25.6	1.13 H	258	50.4	12.2
4	#13650.00	49.5 AV	68.2	-18.7	1.13 H	258	37.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	95.1 PK			2.41 V	159	48.6	46.5
2	*6825.00	81.7 AV			2.41 V	159	35.2	46.5
3	#13650.00	62.4 PK	88.2	-25.8	1.35 V	69	50.2	12.2
4	#13650.00	49.3 AV	68.2	-18.9	1.35 V	69	37.1	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	95.9 PK			2.46 H	141	48.2	47.7
2	*6985.00	83.7 AV			2.46 H	141	36.0	47.7
3	#7125.00	56.8 PK	88.2	-31.4	2.46 H	141	44.7	12.1
4	#7125.00	42.6 AV	68.2	-25.6	2.46 H	141	30.5	12.1
5	#13970.00	62.9 PK	88.2	-25.3	1.18 H	275	50.6	12.3
6	#13970.00	49.6 AV	68.2	-18.6	1.18 H	275	37.3	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	95.4 PK			2.34 V	158	47.7	47.7
2	*6985.00	82.8 AV			2.34 V	158	35.1	47.7
3	#7125.00	56.6 PK	88.2	-31.6	2.34 V	158	44.5	12.1
4	#7125.00	42.4 AV	68.2	-25.8	2.34 V	158	30.3	12.1
5	#13970.00	62.7 PK	88.2	-25.5	1.32 V	77	50.4	12.3
6	#13970.00	49.4 AV	68.2	-18.8	1.32 V	77	37.1	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.9 PK	88.2	-39.3	2.49 H	156	42.2	6.7
2	#5925.00	36.1 AV	68.2	-32.1	2.49 H	156	29.4	6.7
3	*5955.00	96.4 PK			2.49 H	156	53.8	42.6
4	*5955.00	86.1 AV			2.49 H	156	43.5	42.6
5	11910.00	61.0 PK	74.0	-13.0	1.21 H	273	50.4	10.6
6	11910.00	48.1 AV	54.0	-5.9	1.21 H	273	37.5	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.7 PK	88.2	-39.5	1.57 V	176	42.0	6.7
2	#5925.00	35.7 AV	68.2	-32.5	1.57 V	176	29.0	6.7
3	*5955.00	88.1 PK			1.57 V	176	45.5	42.6
4	*5955.00	78.1 AV			1.57 V	176	35.5	42.6
5	11910.00	60.8 PK	74.0	-13.2	2.47 V	314	50.2	10.6
6	11910.00	47.8 AV	54.0	-6.2	2.47 V	314	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	99.1 PK			2.53 H	148	54.4	44.7
2	*6175.00	89.2 AV			2.53 H	148	44.5	44.7
3	12350.00	61.3 PK	74.0	-12.7	1.86 H	73	50.7	10.6
4	12350.00	48.2 AV	54.0	-5.8	1.86 H	73	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	91.0 PK			1.59 V	194	46.3	44.7
2	*6175.00	81.6 AV			1.59 V	194	36.9	44.7
3	12350.00	61.0 PK	74.0	-13.0	2.34 V	289	50.4	10.6
4	12350.00	47.9 AV	54.0	-6.1	2.34 V	289	37.3	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	98.4 PK			2.43 H	157	52.4	46.0
2	*6415.00	88.1 AV			2.43 H	157	42.1	46.0
3	#12830.00	61.2 PK	88.2	-27.0	1.76 H	93	50.6	10.6
4	#12830.00	48.0 AV	68.2	-20.2	1.76 H	93	37.4	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.1 PK			1.58 V	189	46.1	46.0
2	*6415.00	82.5 AV			1.58 V	189	36.5	46.0
3	#12830.00	60.8 PK	88.2	-27.4	2.74 V	123	50.2	10.6
4	#12830.00	47.7 AV	68.2	-20.5	2.74 V	123	37.1	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	97.5 PK			2.47 H	148	51.5	46.0
2	*6435.00	87.4 AV			2.47 H	148	41.4	46.0
3	#12870.00	61.1 PK	88.2	-27.1	1.13 H	289	50.5	10.6
4	#12870.00	48.8 AV	68.2	-19.4	1.13 H	289	38.2	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.3 PK			1.44 V	190	46.3	46.0
2	*6435.00	82.0 AV			1.44 V	190	36.0	46.0
3	#12870.00	60.8 PK	88.2	-27.4	2.63 V	157	50.2	10.6
4	#12870.00	48.6 AV	68.2	-19.6	2.63 V	157	38.0	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	97.2 PK			2.49 H	137	51.2	46.0
2	*6475.00	87.4 AV			2.49 H	137	41.4	46.0
3	#12950.00	60.9 PK	88.2	-27.3	1.26 H	274	50.5	10.4
4	#12950.00	48.7 AV	68.2	-19.5	1.26 H	274	38.3	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	91.3 PK			1.55 V	189	45.3	46.0
2	*6475.00	81.6 AV			1.55 V	189	35.6	46.0
3	#12950.00	60.7 PK	88.2	-27.5	2.68 V	148	50.3	10.4
4	#12950.00	48.5 AV	68.2	-19.7	2.68 V	148	38.1	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.7 PK			2.47 H	137	51.8	45.9
2	*6515.00	88.1 AV			2.47 H	137	42.2	45.9
3	#13030.00	61.2 PK	88.2	-27.0	1.35 H	261	50.8	10.4
4	#13030.00	48.9 AV	68.2	-19.3	1.35 H	261	38.5	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	92.3 PK			1.44 V	189	46.4	45.9
2	*6515.00	81.9 AV			1.44 V	189	36.0	45.9
3	#13030.00	61.0 PK	88.2	-27.2	2.54 V	143	50.6	10.4
4	#13030.00	48.8 AV	68.2	-19.4	2.54 V	143	38.4	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.5 PK			2.49 H	136	51.6	45.9
2	*6535.00	87.7 AV			2.49 H	136	41.8	45.9
3	#13070.00	60.6 PK	88.2	-27.6	1.46 H	224	50.4	10.2
4	#13070.00	48.5 AV	68.2	-19.7	1.46 H	224	38.3	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.1 PK			1.41 V	189	45.2	45.9
2	*6535.00	80.9 AV			1.41 V	189	35.0	45.9
3	#13070.00	60.3 PK	88.2	-27.9	2.21 V	148	50.1	10.2
4	#13070.00	48.2 AV	68.2	-20.0	2.21 V	148	38.0	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	97.7 PK			2.48 H	136	51.4	46.3
2	*6695.00	87.7 AV			2.48 H	136	41.4	46.3
3	13390.00	61.7 PK	74.0	-12.3	1.38 H	217	50.4	11.3
4	13390.00	49.5 AV	54.0	-4.5	1.38 H	217	38.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	90.4 PK			1.33 V	189	44.1	46.3
2	*6695.00	80.2 AV			1.33 V	189	33.9	46.3
3	13390.00	61.5 PK	74.0	-12.5	2.18 V	159	50.2	11.3
4	13390.00	49.2 AV	54.0	-4.8	2.18 V	159	37.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.6 PK			2.44 H	137	51.0	46.6
2	*6855.00	87.7 AV			2.44 H	137	41.1	46.6
3	#13710.00	62.8 PK	88.2	-25.4	1.32 H	225	50.6	12.2
4	#13710.00	50.7 AV	68.2	-17.5	1.32 H	225	38.5	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	90.5 PK			1.31 V	185	43.9	46.6
2	*6855.00	80.3 AV			1.31 V	185	33.7	46.6
3	#13710.00	62.5 PK	88.2	-25.7	2.24 V	153	50.3	12.2
4	#13710.00	50.3 AV	68.2	-17.9	2.24 V	153	38.1	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.0 PK			2.42 H	138	52.4	46.6
2	*6875.00	88.6 AV			2.42 H	138	42.0	46.6
3	#13750.00	62.7 PK	88.2	-25.5	1.48 H	219	50.6	12.1
4	#13750.00	50.5 AV	68.2	-17.7	1.48 H	219	38.4	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	91.9 PK			1.35 V	185	45.3	46.6
2	*6875.00	81.5 AV			1.35 V	185	34.9	46.6
3	#13750.00	62.5 PK	88.2	-25.7	2.27 V	142	50.4	12.1
4	#13750.00	50.4 AV	68.2	-17.8	2.27 V	142	38.3	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	97.8 PK			2.41 H	137	50.0	47.8
2	*6995.00	87.5 AV			2.41 H	137	39.7	47.8
3	#13990.00	63.1 PK	88.2	-25.1	1.42 H	229	50.7	12.4
4	#13990.00	51.0 AV	68.2	-17.2	1.42 H	229	38.6	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	90.0 PK			1.30 V	180	42.2	47.8
2	*6995.00	80.4 AV			1.30 V	180	32.6	47.8
3	#13990.00	62.7 PK	88.2	-25.5	2.14 V	156	50.3	12.4
4	#13990.00	50.6 AV	68.2	-17.6	2.14 V	156	38.2	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.7 PK			2.41 H	136	47.0	48.7
2	*7115.00	85.1 AV			2.41 H	136	36.4	48.7
3	#7125.00	74.7 PK	88.2	-13.5	2.41 H	136	62.6	12.1
4	#7125.00	56.7 AV	68.2	-11.5	2.41 H	136	44.6	12.1
5	#14230.00	65.4 PK	88.2	-22.8	1.35 H	215	52.6	12.8
6	#14230.00	52.6 AV	68.2	-15.6	1.35 H	215	39.8	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	88.5 PK			1.25 V	181	39.8	48.7
2	*7115.00	78.5 AV			1.25 V	181	29.8	48.7
3	#7125.00	66.2 PK	88.2	-22.0	1.25 V	181	54.1	12.1
4	#7125.00	50.2 AV	68.2	-18.0	1.25 V	181	38.1	12.1
5	#14230.00	65.1 PK	88.2	-23.1	2.31 V	142	52.3	12.8
6	#14230.00	52.3 AV	68.2	-15.9	2.31 V	142	39.5	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.1 PK	88.2	-38.1	2.50 H	160	43.4	6.7
2	#5925.00	36.1 AV	68.2	-32.1	2.50 H	160	29.4	6.7
3	*5955.00	98.4 PK			2.50 H	160	55.8	42.6
4	*5955.00	85.7 AV			2.50 H	160	43.1	42.6
5	11910.00	61.0 PK	74.0	-13.0	1.46 H	229	50.4	10.6
6	11910.00	47.9 AV	54.0	-6.1	1.46 H	229	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.7 PK	88.2	-38.5	1.55 V	178	43.0	6.7
2	#5925.00	36.0 AV	68.2	-32.2	1.55 V	178	29.3	6.7
3	*5955.00	90.8 PK			1.55 V	178	48.2	42.6
4	*5955.00	77.8 AV			1.55 V	178	35.2	42.6
5	11910.00	60.8 PK	74.0	-13.2	2.65 V	159	50.2	10.6
6	11910.00	47.7 AV	54.0	-6.3	2.65 V	159	37.1	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	102.6 PK			2.53 H	150	57.9	44.7
2	*6175.00	89.6 AV			2.53 H	150	44.9	44.7
3	12350.00	61.2 PK	74.0	-12.8	1.56 H	221	50.6	10.6
4	12350.00	47.9 AV	54.0	-6.1	1.56 H	221	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	95.5 PK			1.76 V	192	50.8	44.7
2	*6175.00	82.3 AV			1.76 V	192	37.6	44.7
3	12350.00	61.0 PK	74.0	-13.0	2.54 V	139	50.4	10.6
4	12350.00	47.8 AV	54.0	-6.2	2.54 V	139	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	100.7 PK			2.54 H	136	54.7	46.0
2	*6415.00	88.2 AV			2.54 H	136	42.2	46.0
3	#12830.00	61.1 PK	88.2	-27.1	1.48 H	229	50.5	10.6
4	#12830.00	47.9 AV	68.2	-20.3	1.48 H	229	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.3 PK			1.76 V	154	50.3	46.0
2	*6415.00	83.5 AV			1.76 V	154	37.5	46.0
3	#12830.00	60.9 PK	88.2	-27.3	2.48 V	149	50.3	10.6
4	#12830.00	47.6 AV	68.2	-20.6	2.48 V	149	37.0	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.4 PK			2.53 H	137	54.4	46.0
2	*6435.00	87.5 AV			2.53 H	137	41.5	46.0
3	#12870.00	61.3 PK	88.2	-26.9	1.42 H	221	50.7	10.6
4	#12870.00	48.2 AV	68.2	-20.0	1.42 H	221	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.0 PK			1.88 V	154	50.0	46.0
2	*6435.00	83.1 AV			1.88 V	154	37.1	46.0
3	#12870.00	61.0 PK	88.2	-27.2	2.32 V	157	50.4	10.6
4	#12870.00	47.8 AV	68.2	-20.4	2.32 V	157	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.4 PK			2.49 H	136	54.4	46.0
2	*6475.00	87.6 AV			2.49 H	136	41.6	46.0
3	#12950.00	61.0 PK	88.2	-27.2	1.35 H	228	50.6	10.4
4	#12950.00	47.8 AV	68.2	-20.4	1.35 H	228	37.4	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	95.6 PK			1.73 V	152	49.6	46.0
2	*6475.00	82.8 AV			1.73 V	152	36.8	46.0
3	#12950.00	60.6 PK	88.2	-27.6	2.41 V	103	50.2	10.4
4	#12950.00	47.4 AV	68.2	-20.8	2.41 V	103	37.0	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.7 PK			2.50 H	137	53.8	45.9
2	*6515.00	87.2 AV			2.50 H	137	41.3	45.9
3	#13030.00	60.9 PK	88.2	-27.3	1.56 H	210	50.5	10.4
4	#13030.00	47.7 AV	68.2	-20.5	1.56 H	210	37.3	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.7 PK			1.83 V	154	49.8	45.9
2	*6515.00	82.7 AV			1.83 V	154	36.8	45.9
3	#13030.00	60.7 PK	88.2	-27.5	2.32 V	98	50.3	10.4
4	#13030.00	47.5 AV	68.2	-20.7	2.32 V	98	37.1	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	100.3 PK			2.49 H	138	54.4	45.9
2	*6535.00	87.6 AV			2.49 H	138	41.7	45.9
3	#13070.00	60.6 PK	88.2	-27.6	1.43 H	234	50.4	10.2
4	#13070.00	47.4 AV	68.2	-20.8	1.43 H	234	37.2	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.9 PK			1.82 V	152	50.0	45.9
2	*6535.00	83.3 AV			1.82 V	152	37.4	45.9
3	#13070.00	60.4 PK	88.2	-27.8	2.24 V	193	50.2	10.2
4	#13070.00	47.3 AV	68.2	-20.9	2.24 V	193	37.1	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	99.6 PK			2.48 H	137	53.3	46.3
2	*6695.00	87.0 AV			2.48 H	137	40.7	46.3
3	13390.00	61.9 PK	74.0	-12.1	1.04 H	286	50.6	11.3
4	13390.00	48.6 AV	54.0	-5.4	1.04 H	286	37.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.7 PK			2.02 V	134	49.4	46.3
2	*6695.00	83.1 AV			2.02 V	134	36.8	46.3
3	13390.00	61.6 PK	74.0	-12.4	2.10 V	185	50.3	11.3
4	13390.00	48.5 AV	54.0	-5.5	2.10 V	185	37.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	100.6 PK			2.45 H	136	54.0	46.6
2	*6855.00	88.2 AV			2.45 H	136	41.6	46.6
3	#13710.00	62.6 PK	88.2	-25.6	1.06 H	274	50.4	12.2
4	#13710.00	49.6 AV	68.2	-18.6	1.06 H	274	37.4	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.6 PK			1.98 V	132	51.0	46.6
2	*6855.00	84.5 AV			1.98 V	132	37.9	46.6
3	#13710.00	62.3 PK	88.2	-25.9	1.53 V	317	50.1	12.2
4	#13710.00	49.1 AV	68.2	-19.1	1.53 V	317	36.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.2 PK			2.47 H	137	53.6	46.6
2	*6875.00	87.5 AV			2.47 H	137	40.9	46.6
3	#13750.00	62.8 PK	88.2	-25.4	1.09 H	254	50.7	12.1
4	#13750.00	49.6 AV	68.2	-18.6	1.09 H	254	37.5	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.0 PK			1.95 V	133	49.4	46.6
2	*6875.00	83.6 AV			1.95 V	133	37.0	46.6
3	#13750.00	62.4 PK	88.2	-25.8	1.34 V	325	50.3	12.1
4	#13750.00	49.3 AV	68.2	-18.9	1.34 V	325	37.2	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.1 PK			2.41 H	137	52.3	47.8
2	*6995.00	87.1 AV			2.41 H	137	39.3	47.8
3	#13990.00	63.0 PK	88.2	-25.2	1.13 H	265	50.6	12.4
4	#13990.00	49.9 AV	68.2	-18.3	1.13 H	265	37.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	96.7 PK			1.98 V	132	48.9	47.8
2	*6995.00	83.6 AV			1.98 V	132	35.8	47.8
3	#13990.00	62.7 PK	88.2	-25.5	1.56 V	321	50.3	12.4
4	#13990.00	49.5 AV	68.2	-18.7	1.56 V	321	37.1	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) Full RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.8 PK			2.40 H	137	50.1	48.7
2	*7115.00	86.2 AV			2.40 H	137	37.5	48.7
3	#7125.00	86.4 PK	88.2	-1.8	2.40 H	137	74.3	12.1
4	#7125.00	62.6 AV	68.2	-5.6	2.40 H	137	50.5	12.1
5	#14230.00	63.2 PK	88.2	-25.0	1.07 H	273	50.4	12.8
6	#14230.00	49.9 AV	68.2	-18.3	1.07 H	273	37.1	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.8 PK			1.91 V	132	46.1	48.7
2	*7115.00	82.7 AV			1.91 V	132	34.0	48.7
3	#7125.00	78.8 PK	88.2	-9.4	1.91 V	132	66.7	12.1
4	#7125.00	59.5 AV	68.2	-8.7	1.91 V	132	47.4	12.1
5	#14230.00	63.0 PK	88.2	-25.2	1.43 V	318	50.2	12.8
6	#14230.00	49.8 AV	68.2	-18.4	1.43 V	318	37.0	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.8 PK	88.2	-38.4	2.51 H	160	43.1	6.7
2	#5925.00	36.2 AV	68.2	-32.0	2.51 H	160	29.5	6.7
3	*5965.00	99.1 PK			2.51 H	160	56.5	42.6
4	*5965.00	87.3 AV			2.51 H	160	44.7	42.6
5	11930.00	60.9 PK	74.0	-13.1	3.55 H	238	50.4	10.5
6	11930.00	48.3 AV	54.0	-5.7	3.55 H	238	37.8	10.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.1 PK	88.2	-39.1	1.53 V	178	42.4	6.7
2	#5925.00	36.1 AV	68.2	-32.1	1.53 V	178	29.4	6.7
3	*5965.00	91.1 PK			1.53 V	178	48.5	42.6
4	*5965.00	78.9 AV			1.53 V	178	36.3	42.6
5	11930.00	60.6 PK	74.0	-13.4	1.25 V	153	50.1	10.5
6	11930.00	47.7 AV	54.0	-6.3	1.25 V	153	37.2	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	101.3 PK			2.50 H	147	56.8	44.5
2	*6165.00	89.1 AV			2.50 H	147	44.6	44.5
3	12330.00	61.6 PK	74.0	-12.4	2.65 H	342	50.9	10.7
4	12330.00	48.5 AV	54.0	-5.5	2.65 H	342	37.8	10.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	93.8 PK			1.64 V	194	49.3	44.5
2	*6165.00	81.5 AV			1.64 V	194	37.0	44.5
3	12330.00	60.8 PK	74.0	-13.2	3.80 V	54	50.1	10.7
4	12330.00	48.1 AV	54.0	-5.9	3.80 V	54	37.4	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	101.2 PK			2.44 H	150	55.3	45.9
2	*6405.00	87.6 AV			2.44 H	150	41.7	45.9
3	#12810.00	61.5 PK	88.2	-26.7	2.22 H	172	50.9	10.6
4	#12810.00	48.2 AV	68.2	-20.0	2.22 H	172	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	93.5 PK			1.64 V	197	47.6	45.9
2	*6405.00	80.7 AV			1.64 V	197	34.8	45.9
3	#12810.00	61.1 PK	88.2	-27.1	2.81 V	138	50.5	10.6
4	#12810.00	47.9 AV	68.2	-20.3	2.81 V	138	37.3	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	99.7 PK			2.41 H	148	53.6	46.1
2	*6445.00	87.5 AV			2.41 H	148	41.4	46.1
3	#12890.00	61.2 PK	88.2	-27.0	1.78 H	172	50.7	10.5
4	#12890.00	47.9 AV	68.2	-20.3	1.78 H	172	37.4	10.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	93.5 PK			1.64 V	190	47.4	46.1
2	*6445.00	81.6 AV			1.64 V	190	35.5	46.1
3	#12890.00	60.8 PK	88.2	-27.4	3.43 V	76	50.3	10.5
4	#12890.00	47.5 AV	68.2	-20.7	3.43 V	76	37.0	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	99.9 PK			2.53 H	136	53.9	46.0
2	*6485.00	87.5 AV			2.53 H	136	41.5	46.0
3	#12970.00	60.9 PK	88.2	-27.3	3.01 H	328	50.6	10.3
4	#12970.00	47.8 AV	68.2	-20.4	3.01 H	328	37.5	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	95.1 PK			1.64 V	153	49.1	46.0
2	*6485.00	82.6 AV			1.64 V	153	36.6	46.0
3	#12970.00	60.6 PK	88.2	-27.6	1.30 V	248	50.3	10.3
4	#12970.00	47.6 AV	68.2	-20.6	1.30 V	248	37.3	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	100.7 PK			2.53 H	138	54.8	45.9
2	*6525.00	88.1 AV			2.53 H	138	42.2	45.9
3	#13050.00	61.3 PK	88.2	-26.9	3.51 H	60	51.0	10.3
4	#13050.00	48.1 AV	68.2	-20.1	3.51 H	60	37.8	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	94.4 PK			1.76 V	153	48.5	45.9
2	*6525.00	82.5 AV			1.76 V	153	36.6	45.9
3	#13050.00	60.9 PK	88.2	-27.3	2.09 V	349	50.6	10.3
4	#13050.00	47.7 AV	68.2	-20.5	2.09 V	349	37.4	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	100.2 PK			2.51 H	138	54.2	46.0
2	*6565.00	87.5 AV			2.51 H	138	41.5	46.0
3	#13130.00	61.0 PK	88.2	-27.2	1.35 H	69	50.7	10.3
4	#13130.00	48.3 AV	68.2	-19.9	1.35 H	69	38.0	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	94.5 PK			1.76 V	152	48.5	46.0
2	*6565.00	81.9 AV			1.76 V	152	35.9	46.0
3	#13130.00	60.6 PK	88.2	-27.6	3.38 V	285	50.3	10.3
4	#13130.00	48.0 AV	68.2	-20.2	3.38 V	285	37.7	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	100.4 PK			2.43 H	136	54.2	46.2
2	*6725.00	87.5 AV			2.43 H	136	41.3	46.2
3	#13450.00	62.9 PK	88.2	-25.3	3.13 H	265	50.9	12.0
4	#13450.00	50.0 AV	68.2	-18.2	3.13 H	265	38.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	95.1 PK			1.98 V	135	48.9	46.2
2	*6725.00	82.3 AV			1.98 V	135	36.1	46.2
3	#13450.00	62.4 PK	88.2	-25.8	3.32 V	250	50.4	12.0
4	#13450.00	49.7 AV	68.2	-18.5	3.32 V	250	37.7	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	100.0 PK			2.48 H	136	53.4	46.6
2	*6845.00	87.0 AV			2.48 H	136	40.4	46.6
3	#13690.00	62.2 PK	88.2	-26.0	1.37 H	114	50.1	12.1
4	#13690.00	50.0 AV	68.2	-18.2	1.37 H	114	37.9	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	94.8 PK			1.85 V	138	48.2	46.6
2	*6845.00	82.4 AV			1.85 V	138	35.8	46.6
3	#13690.00	61.9 PK	88.2	-26.3	3.71 V	216	49.8	12.1
4	#13690.00	49.3 AV	68.2	-18.9	3.71 V	216	37.2	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	100.9 PK			2.40 H	138	54.3	46.6
2	*6885.00	87.9 AV			2.40 H	138	41.3	46.6
3	#13770.00	62.8 PK	88.2	-25.4	1.88 H	61	50.5	12.3
4	#13770.00	50.1 AV	68.2	-18.1	1.88 H	61	37.8	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	95.7 PK			1.83 V	139	49.1	46.6
2	*6885.00	82.8 AV			1.83 V	139	36.2	46.6
3	#13770.00	62.4 PK	88.2	-25.8	1.76 V	111	50.1	12.3
4	#13770.00	49.5 AV	68.2	-18.7	1.76 V	111	37.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	100.3 PK			2.44 H	137	52.5	47.8
2	*7005.00	87.3 AV			2.44 H	137	39.5	47.8
3	#14010.00	63.1 PK	88.2	-25.1	2.57 H	165	50.6	12.5
4	#14010.00	50.2 AV	68.2	-18.0	2.57 H	165	37.7	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	94.3 PK			1.82 V	140	46.5	47.8
2	*7005.00	81.4 AV			1.82 V	140	33.6	47.8
3	#14010.00	62.7 PK	88.2	-25.5	2.78 V	228	50.2	12.5
4	#14010.00	49.6 AV	68.2	-18.6	2.78 V	228	37.1	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40) Full RU	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	100.5 PK			2.40 H	135	52.0	48.5
2	*7085.00	87.6 AV			2.40 H	135	39.1	48.5
3	#7125.00	54.1 PK	88.2	-34.1	2.40 H	135	42.0	12.1
4	#7125.00	41.2 AV	68.2	-27.0	2.40 H	135	29.1	12.1
5	#14170.00	63.6 PK	88.2	-24.6	2.94 H	284	51.0	12.6
6	#14170.00	50.2 AV	68.2	-18.0	2.94 H	284	37.6	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	95.3 PK			1.90 V	136	46.8	48.5
2	*7085.00	82.6 AV			1.90 V	136	34.1	48.5
3	#7125.00	53.9 PK	88.2	-34.3	1.90 V	136	41.8	12.1
4	#7125.00	41.1 AV	68.2	-27.1	1.90 V	136	29.0	12.1
5	#14170.00	63.2 PK	88.2	-25.0	2.51 V	121	50.6	12.6
6	#14170.00	49.9 AV	68.2	-18.3	2.51 V	121	37.3	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	2.50 H	159	45.3	6.7
2	#5925.00	39.8 AV	68.2	-28.4	2.50 H	159	33.1	6.7
3	*5985.00	98.8 PK			2.50 H	159	56.2	42.6
4	*5985.00	86.6 AV			2.50 H	159	44.0	42.6
5	11970.00	61.5 PK	74.0	-12.5	1.47 H	269	50.9	10.6
6	11970.00	48.2 AV	54.0	-5.8	1.47 H	269	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.0 PK	88.2	-38.2	1.75 V	191	43.3	6.7
2	#5925.00	36.7 AV	68.2	-31.5	1.75 V	191	30.0	6.7
3	*5985.00	91.1 PK			1.75 V	191	48.5	42.6
4	*5985.00	78.5 AV			1.75 V	191	35.9	42.6
5	11970.00	61.2 PK	74.0	-12.8	3.42 V	341	50.6	10.6
6	11970.00	47.8 AV	54.0	-6.2	3.42 V	341	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	98.6 PK			2.50 H	160	54.5	44.1
2	*6145.00	86.3 AV			2.50 H	160	42.2	44.1
3	12290.00	61.4 PK	74.0	-12.6	2.28 H	161	50.4	11.0
4	12290.00	48.8 AV	54.0	-5.2	2.28 H	161	37.8	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	91.2 PK			1.88 V	135	47.1	44.1
2	*6145.00	78.9 AV			1.88 V	135	34.8	44.1
3	12290.00	61.0 PK	74.0	-13.0	3.37 V	207	50.0	11.0
4	12290.00	48.3 AV	54.0	-5.7	3.37 V	207	37.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	100.4 PK			2.49 H	160	54.6	45.8
2	*6385.00	87.9 AV			2.49 H	160	42.1	45.8
3	#12770.00	61.3 PK	88.2	-26.9	2.02 H	31	50.8	10.5
4	#12770.00	48.1 AV	68.2	-20.1	2.02 H	31	37.6	10.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	92.9 PK			1.89 V	136	47.1	45.8
2	*6385.00	80.3 AV			1.89 V	136	34.5	45.8
3	#12770.00	60.8 PK	88.2	-27.4	3.73 V	121	50.3	10.5
4	#12770.00	47.6 AV	68.2	-20.6	3.73 V	121	37.1	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	100.4 PK			2.50 H	136	54.4	46.0
2	*6465.00	88.0 AV			2.50 H	136	42.0	46.0
3	#12930.00	60.5 PK	88.2	-27.7	1.38 H	328	50.1	10.4
4	#12930.00	48.0 AV	68.2	-20.2	1.38 H	328	37.6	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	93.1 PK			1.91 V	139	47.1	46.0
2	*6465.00	80.7 AV			1.91 V	139	34.7	46.0
3	#12930.00	60.2 PK	88.2	-28.0	3.34 V	264	49.8	10.4
4	#12930.00	47.6 AV	68.2	-20.6	3.34 V	264	37.2	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	99.8 PK			2.51 H	135	53.9	45.9
2	*6545.00	87.4 AV			2.51 H	135	41.5	45.9
3	#13090.00	60.5 PK	88.2	-27.7	1.53 H	353	50.2	10.3
4	#13090.00	47.5 AV	68.2	-20.7	1.53 H	353	37.2	10.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	92.7 PK			1.86 V	138	46.8	45.9
2	*6545.00	80.3 AV			1.86 V	138	34.4	45.9
3	#13090.00	60.2 PK	88.2	-28.0	2.02 V	54	49.9	10.3
4	#13090.00	47.3 AV	68.2	-20.9	2.02 V	54	37.0	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	99.8 PK			2.43 H	139	53.5	46.3
2	*6705.00	87.4 AV			2.43 H	139	41.1	46.3
3	#13410.00	62.4 PK	88.2	-25.8	2.09 H	184	50.9	11.5
4	#13410.00	48.7 AV	68.2	-19.5	2.09 H	184	37.2	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	93.0 PK			1.91 V	133	46.7	46.3
2	*6705.00	80.6 AV			1.91 V	133	34.3	46.3
3	#13410.00	62.0 PK	88.2	-26.2	1.55 V	255	50.5	11.5
4	#13410.00	48.3 AV	68.2	-19.9	1.55 V	255	36.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	99.9 PK			2.46 H	137	53.3	46.6
2	*6865.00	87.5 AV			2.46 H	137	40.9	46.6
3	#13730.00	63.2 PK	88.2	-25.0	2.93 H	261	51.0	12.2
4	#13730.00	50.2 AV	68.2	-18.0	2.93 H	261	38.0	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	93.3 PK			1.94 V	135	46.7	46.6
2	*6865.00	80.9 AV			1.94 V	135	34.3	46.6
3	#13730.00	62.8 PK	88.2	-25.4	3.32 V	78	50.6	12.2
4	#13730.00	49.9 AV	68.2	-18.3	3.32 V	78	37.7	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	100.2 PK			2.38 H	137	53.1	47.1
2	*6945.00	87.6 AV			2.38 H	137	40.5	47.1
3	#13890.00	62.3 PK	88.2	-25.9	3.52 H	28	50.3	12.0
4	#13890.00	50.0 AV	68.2	-18.2	3.52 H	28	38.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	93.9 PK			1.89 V	134	46.8	47.1
2	*6945.00	81.4 AV			1.89 V	134	34.3	47.1
3	#13890.00	62.1 PK	88.2	-26.1	1.08 V	318	50.1	12.0
4	#13890.00	49.4 AV	68.2	-18.8	1.08 V	318	37.4	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80) Full RU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	99.9 PK			2.35 H	138	51.9	48.0
2	*7025.00	87.3 AV			2.35 H	138	39.3	48.0
3	#7125.00	55.0 PK	88.2	-33.2	2.35 H	138	42.9	12.1
4	#7125.00	41.5 AV	68.2	-26.7	2.35 H	138	29.4	12.1
5	#14050.00	62.9 PK	88.2	-25.3	1.65 H	321	50.5	12.4
6	#14050.00	50.4 AV	68.2	-17.8	1.65 H	321	38.0	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	94.3 PK			1.88 V	138	46.3	48.0
2	*7025.00	81.7 AV			1.88 V	138	33.7	48.0
3	#7125.00	54.7 PK	88.2	-33.5	1.88 V	138	42.6	12.1
4	#7125.00	41.3 AV	68.2	-26.9	1.88 V	138	29.2	12.1
5	#14050.00	62.6 PK	88.2	-25.6	2.40 V	183	50.2	12.4
6	#14050.00	49.9 AV	68.2	-18.3	2.40 V	183	37.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.2 PK	88.2	-33.0	2.51 H	157	48.5	6.7
2	#5925.00	40.8 AV	68.2	-27.4	2.51 H	157	34.1	6.7
3	*6025.00	101.2 PK			2.51 H	157	58.5	42.7
4	*6025.00	88.9 AV			2.51 H	157	46.2	42.7
5	12050.00	61.6 PK	74.0	-12.4	1.86 H	310	50.8	10.8
6	12050.00	48.3 AV	54.0	-5.7	1.86 H	310	37.5	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.55 V	192	44.1	6.7
2	#5925.00	37.1 AV	68.2	-31.1	1.55 V	192	30.4	6.7
3	*6025.00	92.1 PK			1.55 V	192	49.4	42.7
4	*6025.00	79.9 AV			1.55 V	192	37.2	42.7
5	12050.00	61.3 PK	74.0	-12.7	2.37 V	45	50.5	10.8
6	12050.00	48.1 AV	54.0	-5.9	2.37 V	45	37.3	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	103.1 PK			2.52 H	156	58.1	45.0
2	*6185.00	91.1 AV			2.52 H	156	46.1	45.0
3	12370.00	61.1 PK	74.0	-12.9	1.72 H	302	50.7	10.4
4	12370.00	47.7 AV	54.0	-6.3	1.72 H	302	37.3	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	95.2 PK			1.47 V	189	50.2	45.0
2	*6185.00	82.4 AV			1.47 V	189	37.4	45.0
3	12370.00	60.8 PK	74.0	-13.2	2.21 V	76	50.4	10.4
4	12370.00	47.5 AV	54.0	-6.5	2.21 V	76	37.1	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.1 PK			2.51 H	154	57.5	45.6
2	*6345.00	91.1 AV			2.51 H	154	45.5	45.6
3	12690.00	61.1 PK	74.0	-12.9	1.65 H	287	50.5	10.6
4	12690.00	48.0 AV	54.0	-6.0	1.65 H	287	37.4	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.1 PK			1.54 V	188	50.5	45.6
2	*6345.00	83.9 AV			1.54 V	188	38.3	45.6
3	12690.00	60.9 PK	74.0	-13.1	2.16 V	86	50.3	10.6
4	12690.00	47.8 AV	54.0	-6.2	2.16 V	86	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.5 PK			2.50 H	149	54.6	45.9
2	*6505.00	88.5 AV			2.50 H	149	42.6	45.9
3	#13010.00	60.9 PK	88.2	-27.3	1.68 H	296	50.5	10.4
4	#13010.00	47.8 AV	68.2	-20.4	1.68 H	296	37.4	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	94.2 PK			1.52 V	186	48.3	45.9
2	*6505.00	82.0 AV			1.52 V	186	36.1	45.9
3	#13010.00	60.5 PK	88.2	-27.7	2.14 V	69	50.1	10.4
4	#13010.00	47.4 AV	68.2	-20.8	2.14 V	69	37.0	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.1 PK			2.48 H	148	54.9	46.2
2	*6665.00	88.5 AV			2.48 H	148	42.3	46.2
3	13330.00	61.7 PK	74.0	-12.3	1.73 H	268	50.8	10.9
4	13330.00	48.4 AV	54.0	-5.6	1.73 H	268	37.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	94.2 PK			1.76 V	181	48.0	46.2
2	*6665.00	81.8 AV			1.76 V	181	35.6	46.2
3	13330.00	61.5 PK	74.0	-12.5	2.21 V	93	50.6	10.9
4	13330.00	48.3 AV	54.0	-5.7	2.21 V	93	37.4	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	97.1 PK			2.43 H	147	50.6	46.5
2	*6825.00	84.8 AV			2.43 H	147	38.3	46.5
3	#13650.00	62.8 PK	88.2	-25.4	1.69 H	257	50.6	12.2
4	#13650.00	49.5 AV	68.2	-18.7	1.69 H	257	37.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	92.4 PK			1.78 V	127	45.9	46.5
2	*6825.00	80.2 AV			1.78 V	127	33.7	46.5
3	#13650.00	62.6 PK	88.2	-25.6	2.26 V	99	50.4	12.2
4	#13650.00	49.4 AV	68.2	-18.8	2.26 V	99	37.2	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160) Full RU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	98.6 PK			2.42 H	141	50.9	47.7
2	*6985.00	85.7 AV			2.42 H	141	38.0	47.7
3	#7125.00	55.0 PK	88.2	-33.2	2.42 H	141	42.9	12.1
4	#7125.00	42.7 AV	68.2	-25.5	2.42 H	141	30.6	12.1
5	#13970.00	63.3 PK	88.2	-24.9	1.58 H	243	51.0	12.3
6	#13970.00	50.2 AV	68.2	-18.0	1.58 H	243	37.9	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	94.0 PK			1.76 V	124	46.3	47.7
2	*6985.00	81.4 AV			1.76 V	124	33.7	47.7
3	#7125.00	54.8 PK	88.2	-33.4	1.76 V	124	42.7	12.1
4	#7125.00	41.7 AV	68.2	-26.5	1.76 V	124	29.6	12.1
5	#13970.00	63.0 PK	88.2	-25.2	2.37 V	74	50.7	12.3
6	#13970.00	49.9 AV	68.2	-18.3	2.37 V	74	37.6	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.5 PK	88.2	-38.7	2.65 H	144	42.8	6.7
2	#5925.00	36.1 AV	68.2	-32.1	2.65 H	144	29.4	6.7
3	*5955.00	100.4 PK			2.65 H	144	57.8	42.6
4	*5955.00	88.4 AV			2.65 H	144	45.8	42.6
5	11910.00	61.4 PK	74.0	-12.6	1.62 H	120	50.8	10.6
6	11910.00	48.3 AV	54.0	-5.7	1.62 H	120	37.7	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.2 PK	88.2	-39.0	1.04 V	6	42.5	6.7
2	#5925.00	35.9 AV	68.2	-32.3	1.04 V	6	29.2	6.7
3	*5955.00	91.1 PK			1.04 V	6	48.5	42.6
4	*5955.00	78.9 AV			1.04 V	6	36.3	42.6
5	11910.00	60.8 PK	74.0	-13.2	1.70 V	252	50.2	10.6
6	11910.00	48.0 AV	54.0	-6.0	1.70 V	252	37.4	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	100.8 PK			2.54 H	125	54.8	46.0
2	*6415.00	88.5 AV			2.54 H	125	42.5	46.0
3	#12830.00	61.5 PK	88.2	-26.7	1.41 H	341	50.9	10.6
4	#12830.00	47.9 AV	68.2	-20.3	1.41 H	341	37.3	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.2 PK			1.08 V	4	46.2	46.0
2	*6415.00	79.9 AV			1.08 V	4	33.9	46.0
3	#12830.00	60.9 PK	88.2	-27.3	2.74 V	83	50.3	10.6
4	#12830.00	47.7 AV	68.2	-20.5	2.74 V	83	37.1	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.8 PK			2.58 H	125	54.8	46.0
2	*6435.00	88.5 AV			2.58 H	125	42.5	46.0
3	#12870.00	61.3 PK	88.2	-26.9	3.34 H	52	50.7	10.6
4	#12870.00	48.2 AV	68.2	-20.0	3.34 H	52	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.0 PK			1.09 V	4	46.0	46.0
2	*6435.00	79.7 AV			1.09 V	4	33.7	46.0
3	#12870.00	60.8 PK	88.2	-27.4	1.71 V	242	50.2	10.6
4	#12870.00	47.7 AV	68.2	-20.5	1.71 V	242	37.1	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.5 PK			2.52 H	141	54.6	45.9
2	*6515.00	88.2 AV			2.52 H	141	42.3	45.9
3	#13030.00	61.3 PK	88.2	-26.9	3.93 H	297	50.9	10.4
4	#13030.00	47.6 AV	68.2	-20.6	3.93 H	297	37.2	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	91.7 PK			1.02 V	7	45.8	45.9
2	*6515.00	79.4 AV			1.02 V	7	33.5	45.9
3	#13030.00	60.8 PK	88.2	-27.4	1.63 V	286	50.4	10.4
4	#13030.00	47.3 AV	68.2	-20.9	1.63 V	286	36.9	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	100.3 PK			2.52 H	141	54.4	45.9
2	*6535.00	88.0 AV			2.52 H	141	42.1	45.9
3	#13070.00	60.7 PK	88.2	-27.5	3.23 H	51	50.5	10.2
4	#13070.00	47.4 AV	68.2	-20.8	3.23 H	51	37.2	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.6 PK			1.07 V	3	45.7	45.9
2	*6535.00	79.3 AV			1.07 V	3	33.4	45.9
3	#13070.00	60.4 PK	88.2	-27.8	3.43 V	241	50.2	10.2
4	#13070.00	47.2 AV	68.2	-21.0	3.43 V	241	37.0	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	100.5 PK			2.56 H	140	53.9	46.6
2	*6855.00	88.2 AV			2.56 H	140	41.6	46.6
3	#13710.00	63.4 PK	88.2	-24.8	3.37 H	6	51.2	12.2
4	#13710.00	50.2 AV	68.2	-18.0	3.37 H	6	38.0	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.9 PK			1.10 V	6	45.3	46.6
2	*6855.00	79.6 AV			1.10 V	6	33.0	46.6
3	#13710.00	63.0 PK	88.2	-25.2	1.04 V	223	50.8	12.2
4	#13710.00	49.8 AV	68.2	-18.4	1.04 V	223	37.6	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.7 PK			2.55 H	144	52.9	47.8
2	*6995.00	88.4 AV			2.55 H	144	40.6	47.8
3	#13990.00	63.1 PK	88.2	-25.1	1.13 H	201	50.7	12.4
4	#13990.00	50.7 AV	68.2	-17.5	1.13 H	201	38.3	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	92.1 PK			1.08 V	5	44.3	47.8
2	*6995.00	79.8 AV			1.08 V	5	32.0	47.8
3	#13990.00	62.7 PK	88.2	-25.5	1.79 V	13	50.3	12.4
4	#13990.00	49.9 AV	68.2	-18.3	1.79 V	13	37.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.4 PK			2.45 H	128	50.7	48.7
2	*7115.00	87.3 AV			2.45 H	128	38.6	48.7
3	#7125.00	86.3 PK	88.2	-1.9	2.45 H	128	74.2	12.1
4	#7125.00	67.7 AV	68.2	-0.5	2.45 H	128	55.6	12.1
5	#14230.00	63.5 PK	88.2	-24.7	2.63 H	348	50.7	12.8
6	#14230.00	50.8 AV	68.2	-17.4	2.63 H	348	38.0	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.4 PK			1.05 V	37	43.7	48.7
2	*7115.00	79.6 AV			1.05 V	37	30.9	48.7
3	#7125.00	72.0 PK	88.2	-16.2	1.05 V	37	59.9	12.1
4	#7125.00	55.6 AV	68.2	-12.6	1.05 V	37	43.5	12.1
5	#14230.00	63.4 PK	88.2	-24.8	1.40 V	323	50.6	12.8
6	#14230.00	50.2 AV	68.2	-18.0	1.40 V	323	37.4	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.3 PK	88.2	-38.9	2.65 H	144	42.6	6.7
2	#5925.00	36.4 AV	68.2	-31.8	2.65 H	144	29.7	6.7
3	*5955.00	100.8 PK			2.65 H	144	58.2	42.6
4	*5955.00	87.8 AV			2.65 H	144	45.2	42.6
5	11910.00	61.1 PK	74.0	-12.9	2.55 H	3	50.5	10.6
6	11910.00	48.0 AV	54.0	-6.0	2.55 H	3	37.4	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	48.9 PK	88.2	-39.3	1.04 V	6	42.2	6.7
2	#5925.00	36.1 AV	68.2	-32.1	1.04 V	6	29.4	6.7
3	*5955.00	91.5 PK			1.04 V	6	48.9	42.6
4	*5955.00	78.9 AV			1.04 V	6	36.3	42.6
5	11910.00	60.7 PK	74.0	-13.3	2.80 V	166	50.1	10.6
6	11910.00	47.8 AV	54.0	-6.2	2.80 V	166	37.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	100.9 PK			2.54 H	125	54.9	46.0
2	*6415.00	88.3 AV			2.54 H	125	42.3	46.0
3	#12830.00	61.0 PK	88.2	-27.2	3.08 H	81	50.4	10.6
4	#12830.00	47.8 AV	68.2	-20.4	3.08 H	81	37.2	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.1 PK			1.02 V	9	46.1	46.0
2	*6415.00	79.5 AV			1.02 V	9	33.5	46.0
3	#12830.00	60.6 PK	88.2	-27.6	3.93 V	252	50.0	10.6
4	#12830.00	47.6 AV	68.2	-20.6	3.93 V	252	37.0	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.2 PK			2.58 H	125	55.2	46.0
2	*6435.00	88.2 AV			2.58 H	125	42.2	46.0
3	#12870.00	61.0 PK	88.2	-27.2	3.39 H	286	50.4	10.6
4	#12870.00	48.5 AV	68.2	-19.7	3.39 H	286	37.9	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.5 PK			1.02 V	6	46.5	46.0
2	*6435.00	87.7 AV			1.02 V	6	41.7	46.0
3	#12870.00	60.8 PK	88.2	-27.4	1.98 V	325	50.2	10.6
4	#12870.00	48.2 AV	68.2	-20.0	1.98 V	325	37.6	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.8 PK			2.52 H	141	54.9	45.9
2	*6515.00	87.9 AV			2.52 H	141	42.0	45.9
3	#13030.00	60.8 PK	88.2	-27.4	2.36 H	175	50.4	10.4
4	#13030.00	48.2 AV	68.2	-20.0	2.36 H	175	37.8	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	92.2 PK			1.01 V	8	46.3	45.9
2	*6515.00	79.3 AV			1.01 V	8	33.4	45.9
3	#13030.00	60.5 PK	88.2	-27.7	3.07 V	213	50.1	10.4
4	#13030.00	47.8 AV	68.2	-20.4	3.07 V	213	37.4	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	100.9 PK			2.52 H	141	55.0	45.9
2	*6535.00	88.0 AV			2.52 H	141	42.1	45.9
3	#13070.00	60.4 PK	88.2	-27.8	3.08 H	221	50.2	10.2
4	#13070.00	47.8 AV	68.2	-20.4	3.08 H	221	37.6	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.3 PK			1.04 V	9	46.4	45.9
2	*6535.00	79.4 AV			1.04 V	9	33.5	45.9
3	#13070.00	60.2 PK	88.2	-28.0	1.66 V	174	50.0	10.2
4	#13070.00	47.3 AV	68.2	-20.9	1.66 V	174	37.1	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	101.0 PK			2.52 H	141	54.4	46.6
2	*6855.00	88.1 AV			2.52 H	141	41.5	46.6
3	#13710.00	63.2 PK	88.2	-25.0	3.90 H	296	51.0	12.2
4	#13710.00	49.9 AV	68.2	-18.3	3.90 H	296	37.7	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	92.4 PK			1.06 V	8	45.8	46.6
2	*6855.00	79.5 AV			1.06 V	8	32.9	46.6
3	#13710.00	62.9 PK	88.2	-25.3	1.81 V	209	50.7	12.2
4	#13710.00	49.6 AV	68.2	-18.6	1.81 V	209	37.4	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.2 PK			2.52 H	142	53.4	47.8
2	*6995.00	88.3 AV			2.52 H	142	40.5	47.8
3	#13990.00	63.2 PK	88.2	-25.0	3.36 H	189	50.8	12.4
4	#13990.00	50.5 AV	68.2	-17.7	3.36 H	189	38.1	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	92.6 PK			1.07 V	9	44.8	47.8
2	*6995.00	79.7 AV			1.07 V	9	31.9	47.8
3	#13990.00	62.9 PK	88.2	-25.3	3.62 V	7	50.5	12.4
4	#13990.00	50.1 AV	68.2	-18.1	3.62 V	7	37.7	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.0 PK			2.45 H	128	51.3	48.7
2	*7115.00	86.3 AV			2.45 H	128	37.6	48.7
3	#7125.00	84.5 PK	88.2	-3.7	2.45 H	128	72.4	12.1
4	#7125.00	67.7 AV	68.2	-0.5	2.45 H	128	55.6	12.1
5	#14230.00	63.9 PK	88.2	-24.3	3.58 H	68	51.1	12.8
6	#14230.00	50.8 AV	68.2	-17.4	3.58 H	68	38.0	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.0 PK			1.05 V	37	43.3	48.7
2	*7115.00	79.4 AV			1.05 V	37	30.7	48.7
3	#7125.00	71.3 PK	88.2	-16.9	1.05 V	37	59.2	12.1
4	#7125.00	55.0 AV	68.2	-13.2	1.05 V	37	42.9	12.1
5	#14230.00	63.6 PK	88.2	-24.6	1.40 V	202	50.8	12.8
6	#14230.00	50.2 AV	68.2	-18.0	1.40 V	202	37.4	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.4 PK	88.2	-38.8	2.65 H	144	42.7	6.7
2	#5925.00	36.1 AV	68.2	-32.1	2.65 H	144	29.4	6.7
3	*5955.00	99.7 PK			2.65 H	144	57.1	42.6
4	*5955.00	87.2 AV			2.65 H	144	44.6	42.6
5	11910.00	61.2 PK	74.0	-12.8	3.65 H	255	50.6	10.6
6	11910.00	48.6 AV	54.0	-5.4	3.65 H	255	38.0	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.0 PK	88.2	-39.2	1.04 V	6	42.3	6.7
2	#5925.00	36.0 AV	68.2	-32.2	1.04 V	6	29.3	6.7
3	*5955.00	91.3 PK			1.04 V	6	48.7	42.6
4	*5955.00	78.5 AV			1.04 V	6	35.9	42.6
5	11910.00	61.0 PK	74.0	-13.0	1.45 V	179	50.4	10.6
6	11910.00	47.9 AV	54.0	-6.1	1.45 V	179	37.3	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	101.5 PK			2.54 H	125	55.5	46.0
2	*6415.00	88.1 AV			2.54 H	125	42.1	46.0
3	#12830.00	60.9 PK	88.2	-27.3	2.87 H	170	50.3	10.6
4	#12830.00	48.2 AV	68.2	-20.0	2.87 H	170	37.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.1 PK			1.08 V	4	47.1	46.0
2	*6415.00	79.7 AV			1.08 V	4	33.7	46.0
3	#12830.00	60.7 PK	88.2	-27.5	3.49 V	287	50.1	10.6
4	#12830.00	47.9 AV	68.2	-20.3	3.49 V	287	37.3	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.4 PK			2.58 H	125	55.4	46.0
2	*6435.00	88.0 AV			2.58 H	125	42.0	46.0
3	#12870.00	61.7 PK	88.2	-26.5	1.07 H	162	51.1	10.6
4	#12870.00	48.4 AV	68.2	-19.8	1.07 H	162	37.8	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.8 PK			1.08 V	11	46.8	46.0
2	*6435.00	79.4 AV			1.08 V	11	33.4	46.0
3	#12870.00	61.1 PK	88.2	-27.1	3.75 V	75	50.5	10.6
4	#12870.00	48.0 AV	68.2	-20.2	3.75 V	75	37.4	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.5 PK			2.52 H	141	55.6	45.9
2	*6515.00	88.1 AV			2.52 H	141	42.2	45.9
3	#13030.00	61.0 PK	88.2	-27.2	3.71 H	219	50.6	10.4
4	#13030.00	48.1 AV	68.2	-20.1	3.71 H	219	37.7	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	92.9 PK			1.02 V	10	47.0	45.9
2	*6515.00	79.5 AV			1.02 V	10	33.6	45.9
3	#13030.00	60.5 PK	88.2	-27.7	1.80 V	244	50.1	10.4
4	#13030.00	47.7 AV	68.2	-20.5	1.80 V	244	37.3	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	101.4 PK			2.52 H	141	55.5	45.9
2	*6535.00	88.0 AV			2.52 H	141	42.1	45.9
3	#13070.00	61.1 PK	88.2	-27.1	3.63 H	181	50.9	10.2
4	#13070.00	47.4 AV	68.2	-20.8	3.63 H	181	37.2	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.8 PK			1.08 V	6	46.9	45.9
2	*6535.00	79.4 AV			1.08 V	6	33.5	45.9
3	#13070.00	60.8 PK	88.2	-27.4	1.88 V	284	50.6	10.2
4	#13070.00	47.3 AV	68.2	-20.9	1.88 V	284	37.1	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	101.6 PK			2.52 H	141	55.0	46.6
2	*6855.00	88.2 AV			2.52 H	141	41.6	46.6
3	#13710.00	61.3 PK	88.2	-26.9	3.37 H	247	49.1	12.2
4	#13710.00	48.5 AV	68.2	-19.7	3.37 H	247	36.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.0 PK			2.54 V	144	46.4	46.6
2	*6855.00	79.6 AV			2.54 V	144	33.0	46.6
3	#13710.00	61.1 PK	88.2	-27.1	2.33 V	358	48.9	12.2
4	#13710.00	48.2 AV	68.2	-20.0	2.33 V	358	36.0	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.6 PK			2.52 H	141	53.8	47.8
2	*6995.00	88.2 AV			2.52 H	141	40.4	47.8
3	#13990.00	63.6 PK	88.2	-24.6	2.10 H	154	51.2	12.4
4	#13990.00	49.9 AV	68.2	-18.3	2.10 H	154	37.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.0 PK			1.05 V	6	45.2	47.8
2	*6995.00	79.6 AV			1.05 V	6	31.8	47.8
3	#13990.00	63.2 PK	88.2	-25.0	2.28 V	25	50.8	12.4
4	#13990.00	49.3 AV	68.2	-18.9	2.28 V	25	36.9	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.7 PK			2.24 H	140	50.0	48.7
2	*7115.00	85.5 AV			2.24 H	140	36.8	48.7
3	#7125.00	79.4 PK	88.2	-8.8	2.24 H	140	67.3	12.1
4	#7125.00	65.2 AV	68.2	-3.0	2.24 H	140	53.1	12.1
5	#14230.00	63.1 PK	88.2	-25.1	1.78 H	56	50.3	12.8
6	#14230.00	50.1 AV	68.2	-18.1	1.78 H	56	37.3	12.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.9 PK			1.23 V	24	47.2	48.7
2	*7115.00	83.0 AV			1.23 V	24	34.3	48.7
3	#7125.00	79.1 PK	88.2	-9.1	1.23 V	24	67.0	12.1
4	#7125.00	61.4 AV	68.2	-6.8	1.23 V	24	49.3	12.1
5	#14230.00	62.8 PK	88.2	-25.4	3.15 V	125	50.0	12.8
6	#14230.00	49.9 AV	68.2	-18.3	3.15 V	125	37.1	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge

Mode A


1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

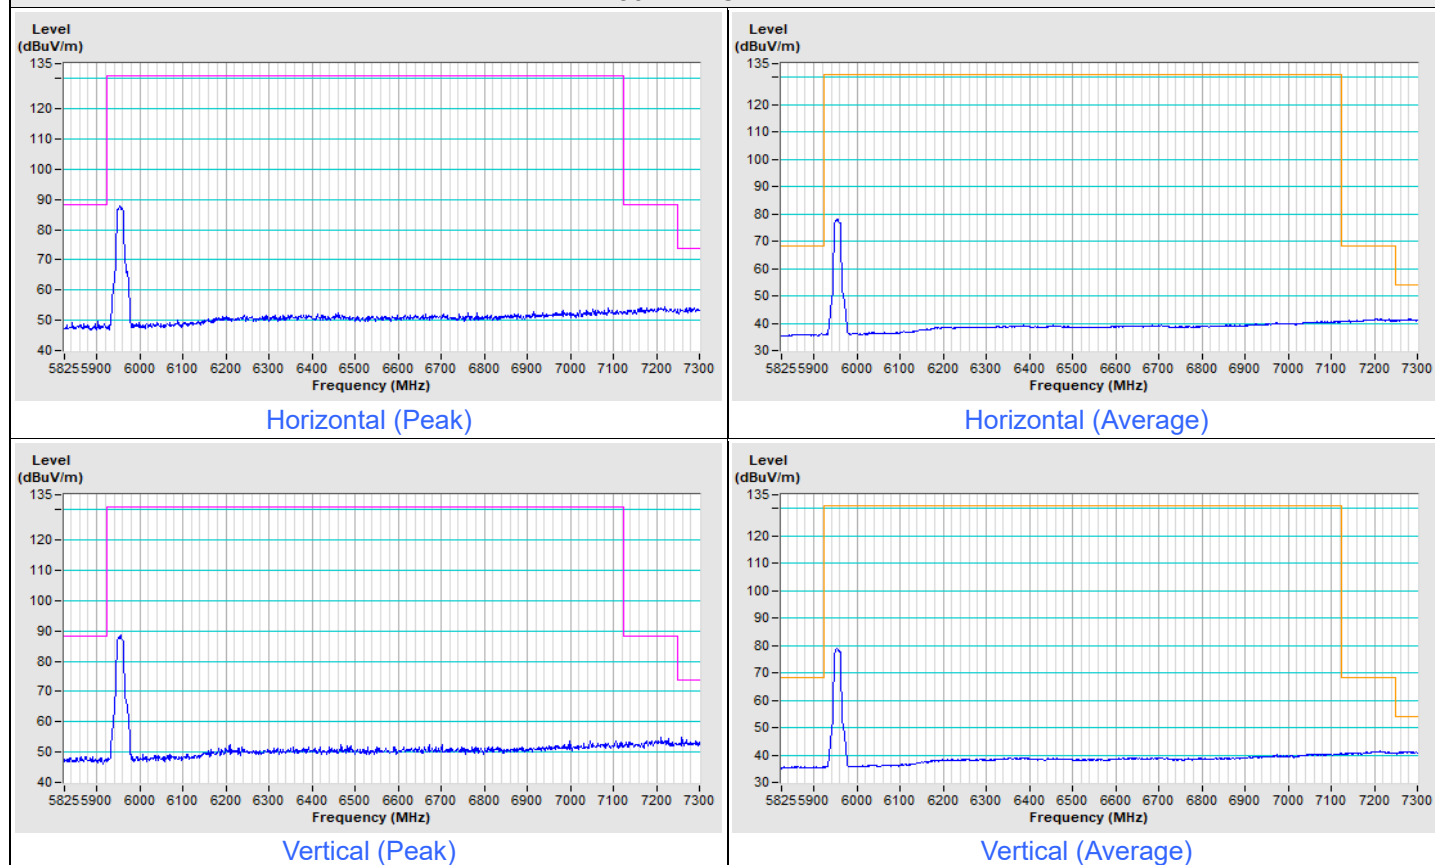


802.11a Channel 233

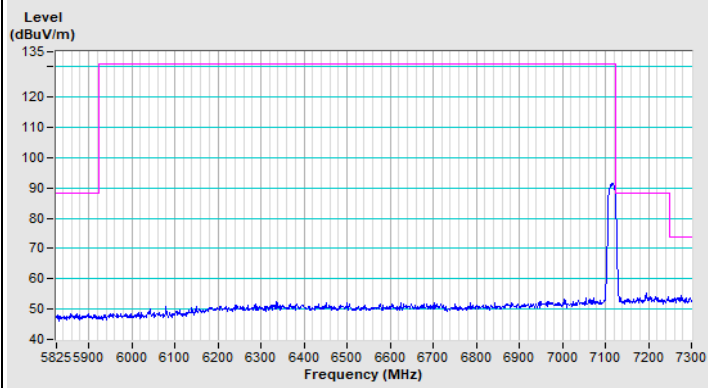


Horizontal (Peak)

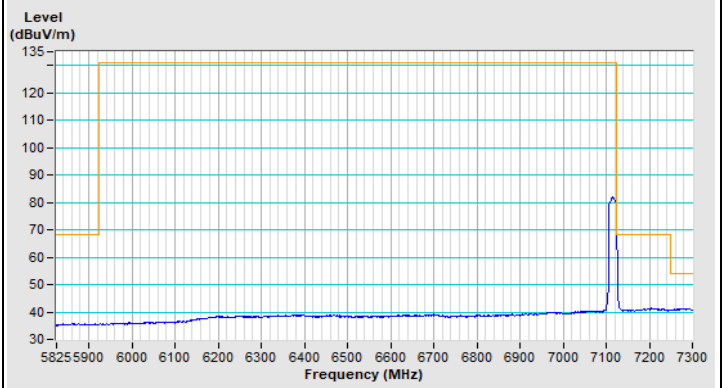

Horizontal (Average)

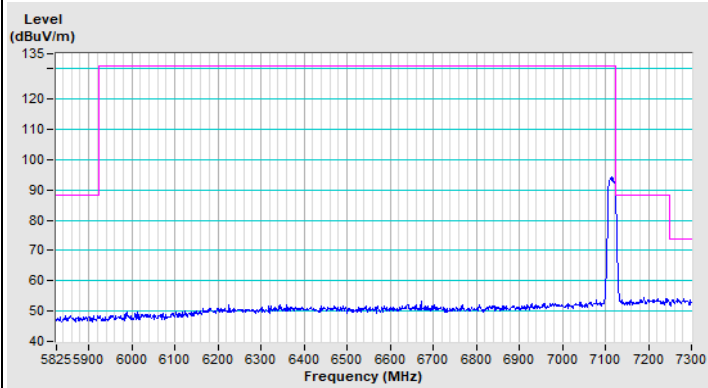


Vertical (Peak)

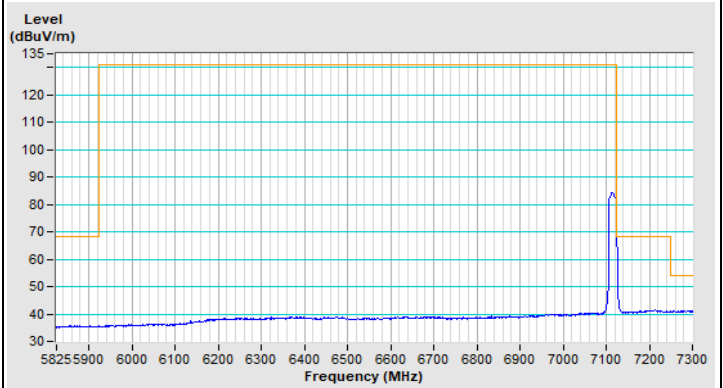


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE160) Full RU Channel 15

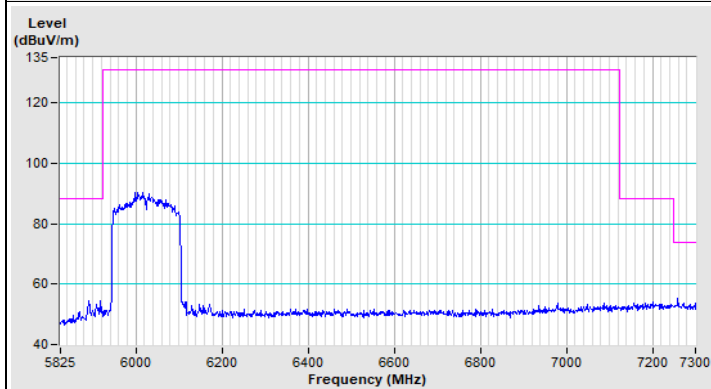


Horizontal (Peak)

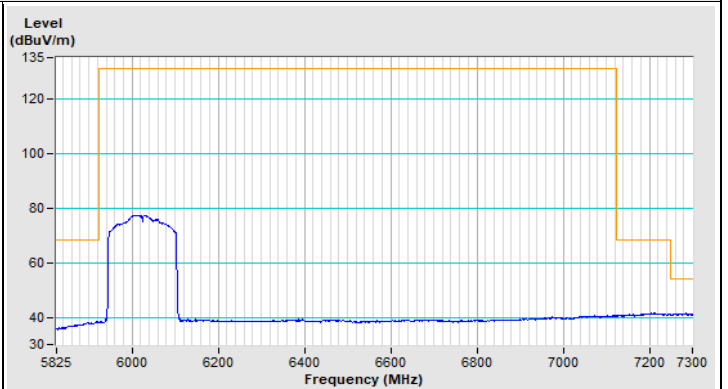

Horizontal (Average)

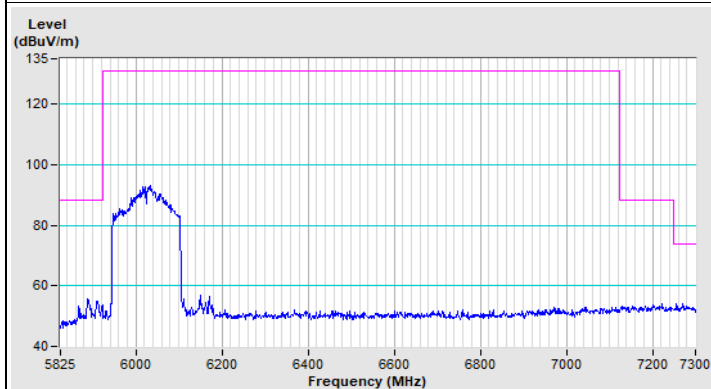


Vertical (Peak)

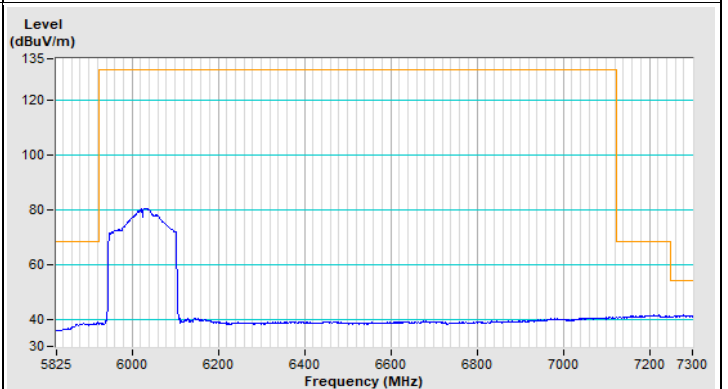


Vertical (Average)


802.11ax (HE160) Full RU Channel 207

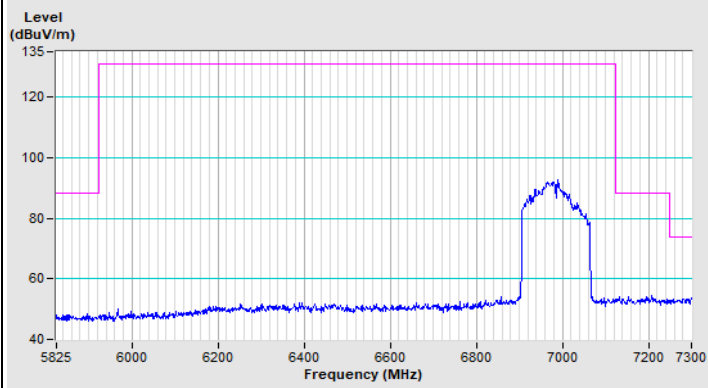


Horizontal (Peak)

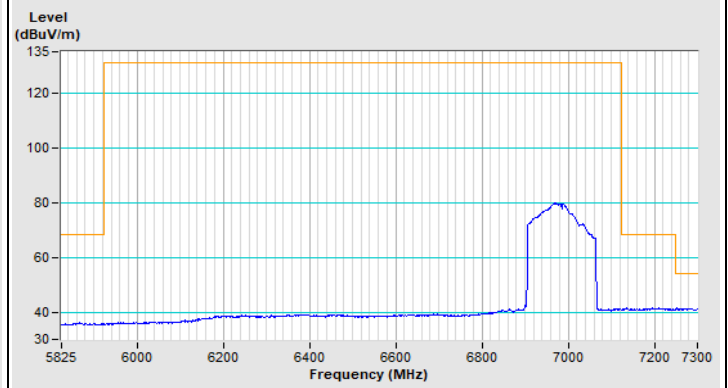

Horizontal (Average)

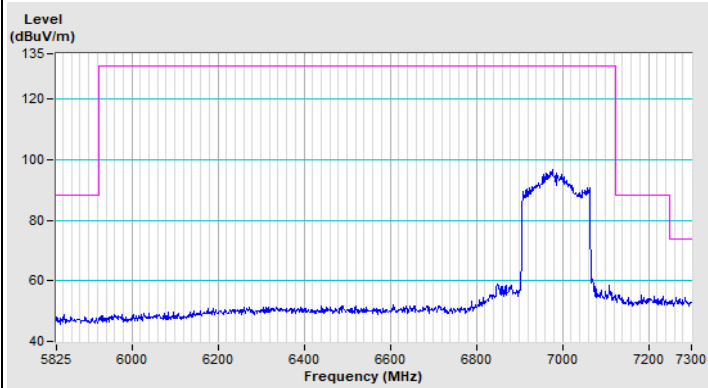


Vertical (Peak)

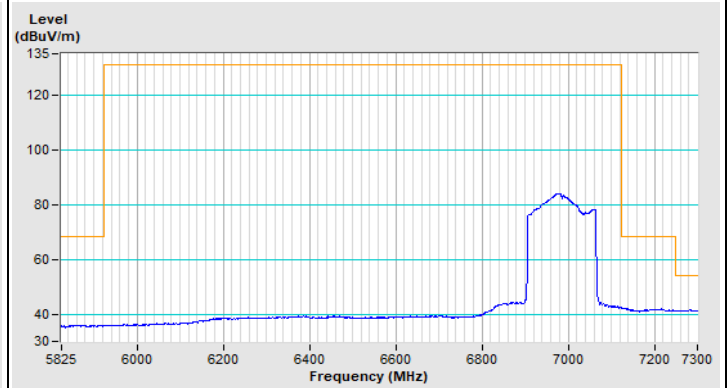


Vertical (Average)

2TX


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

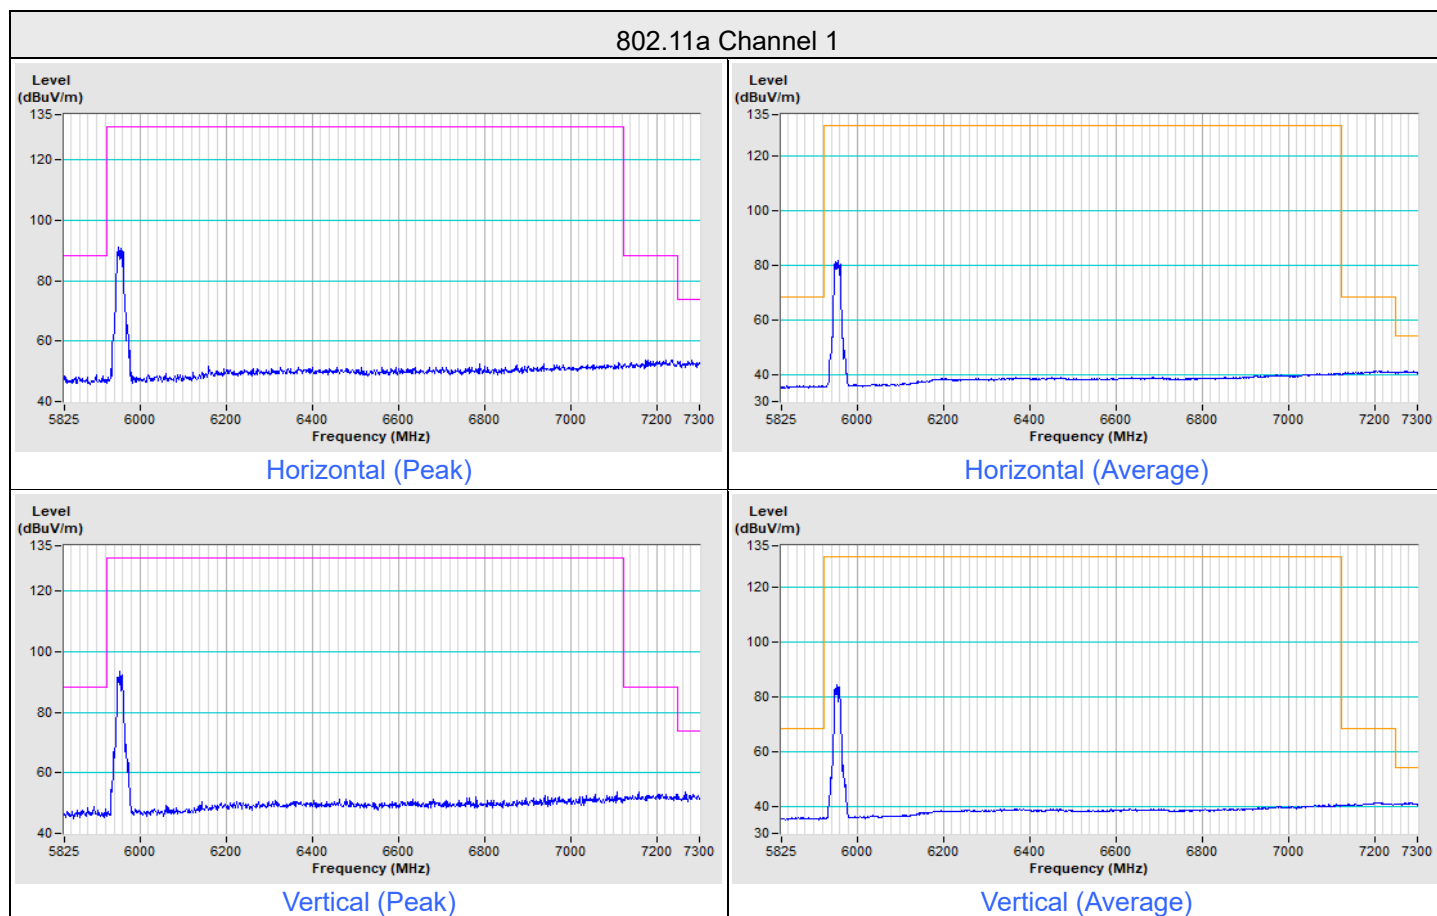


802.11a Channel 233

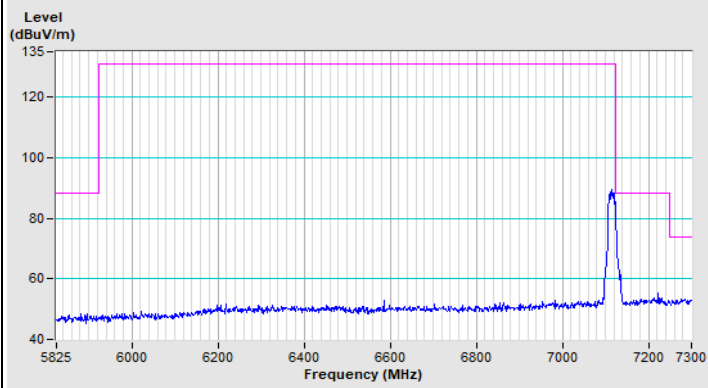


Horizontal (Peak)

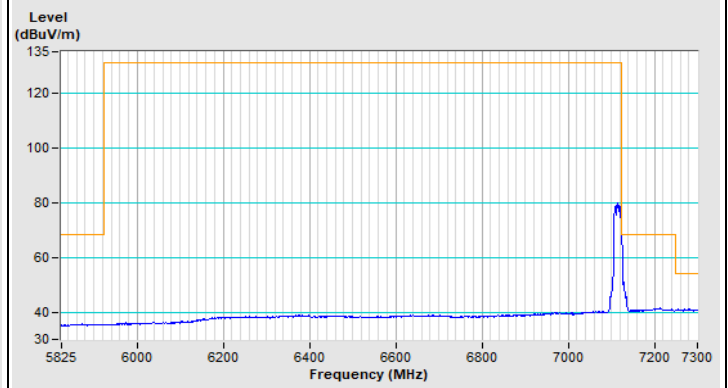

Horizontal (Average)

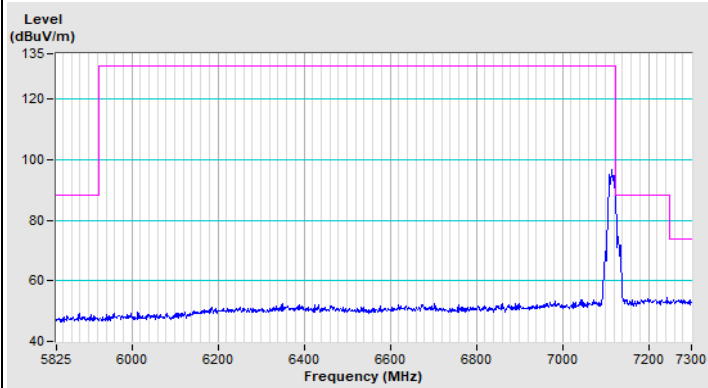


Vertical (Peak)

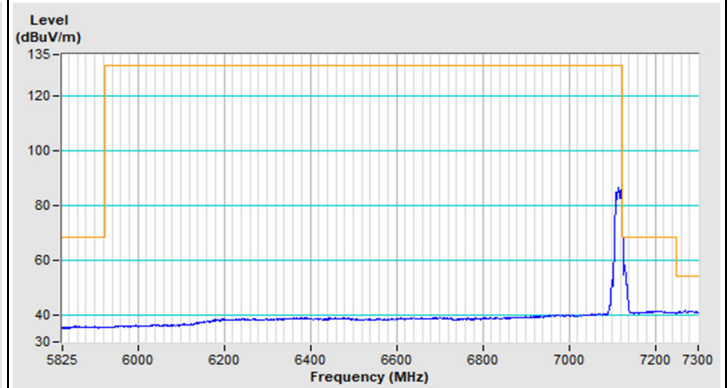


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE20) Full RU Channel 1

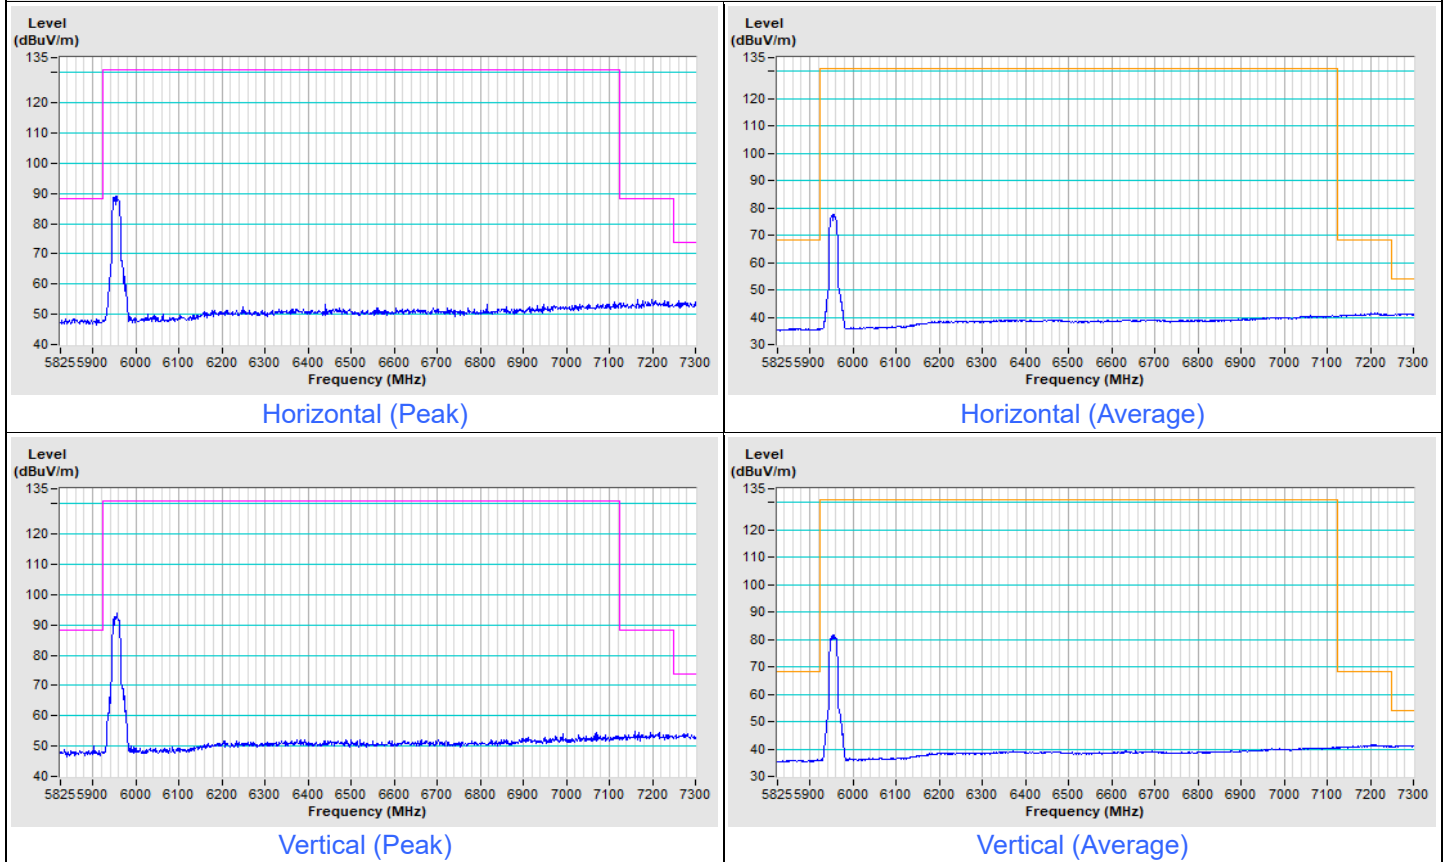


802.11ax (HE20) Full RU Channel 233

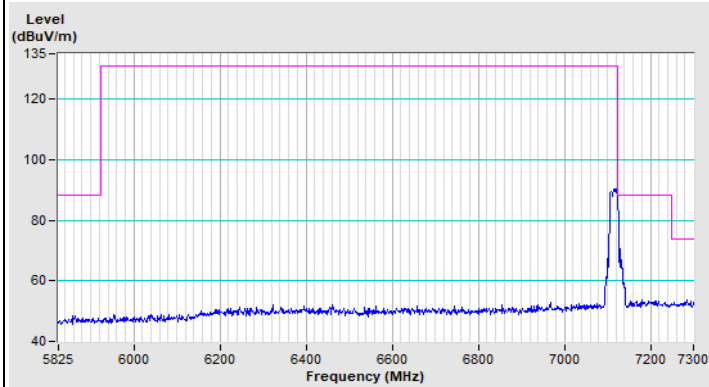


Horizontal (Peak)

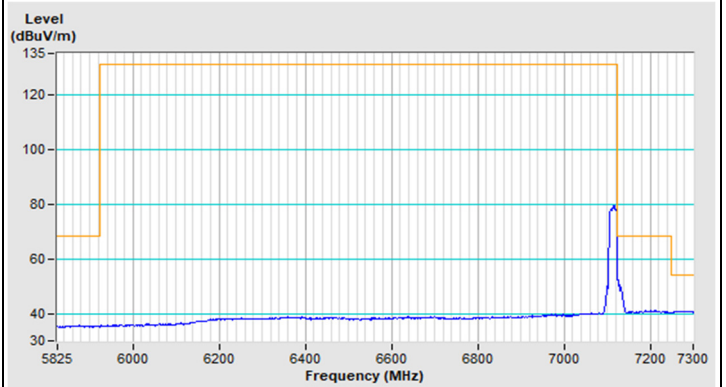

Horizontal (Average)

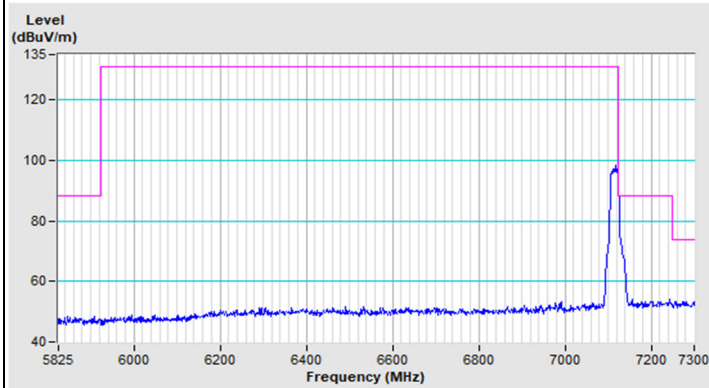


Vertical (Peak)

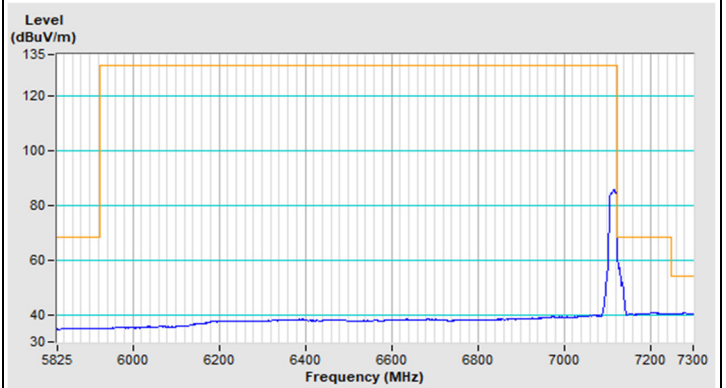


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE40) Full RU Channel 3

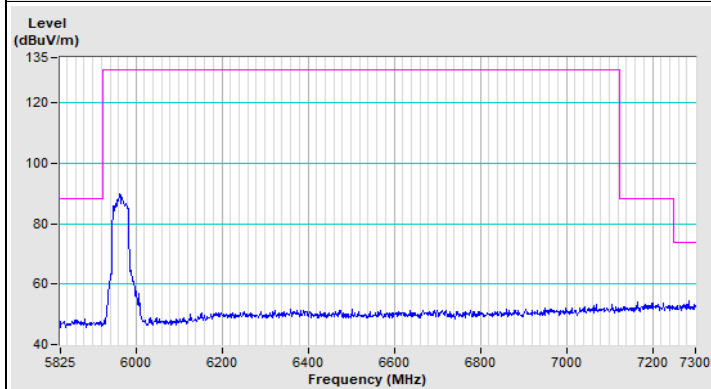


Horizontal (Peak)

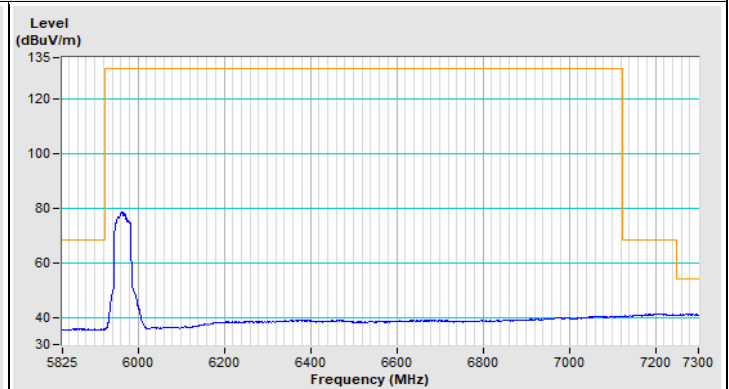

Horizontal (Average)

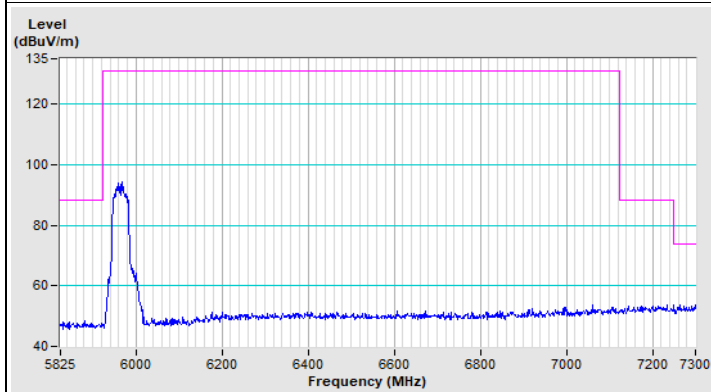


Vertical (Peak)

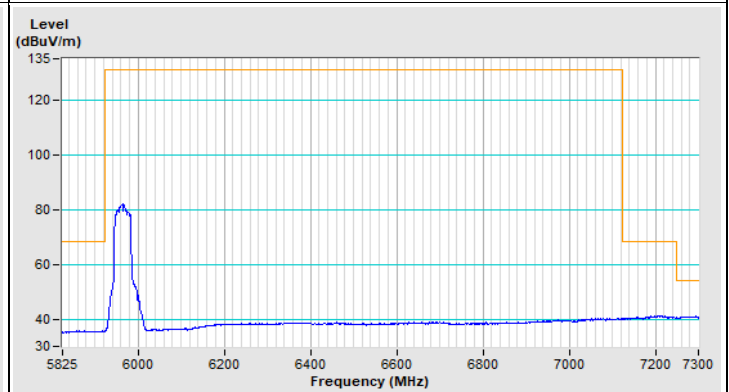


Vertical (Average)


802.11ax (HE40) Full RU Channel 227

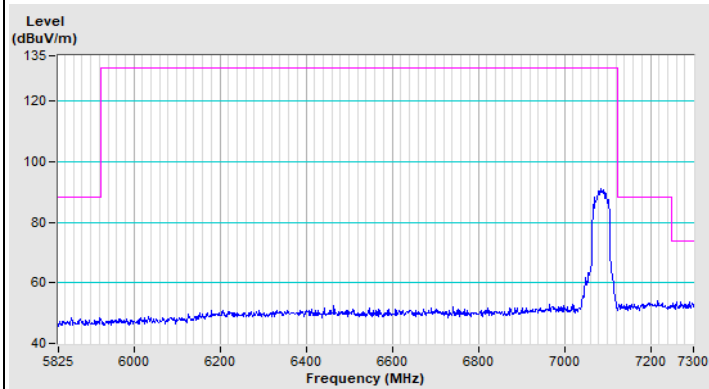


Horizontal (Peak)

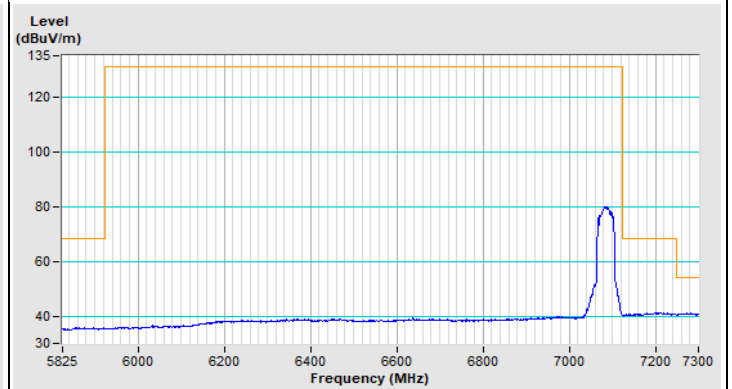

Horizontal (Average)

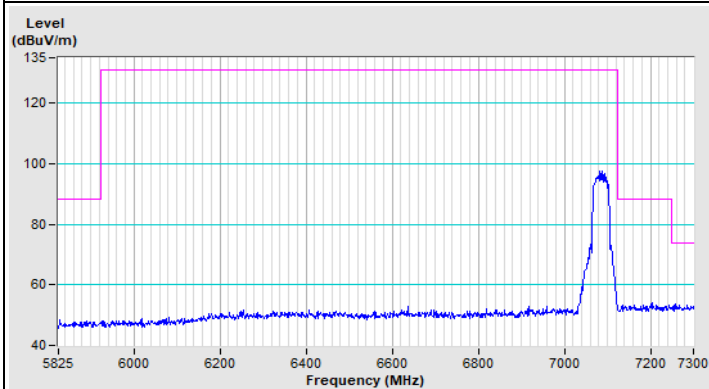


Vertical (Peak)

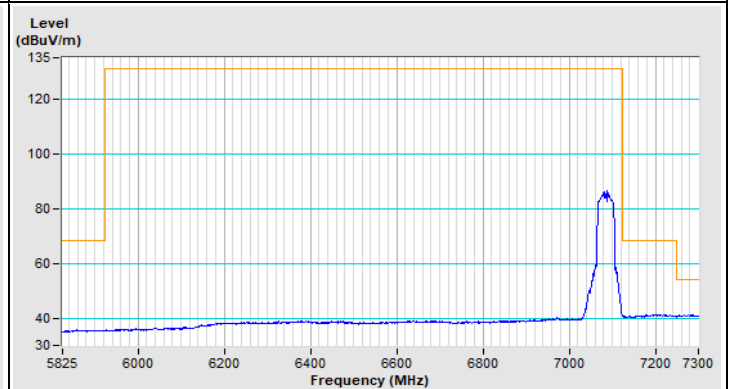


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE80) Full RU Channel 7

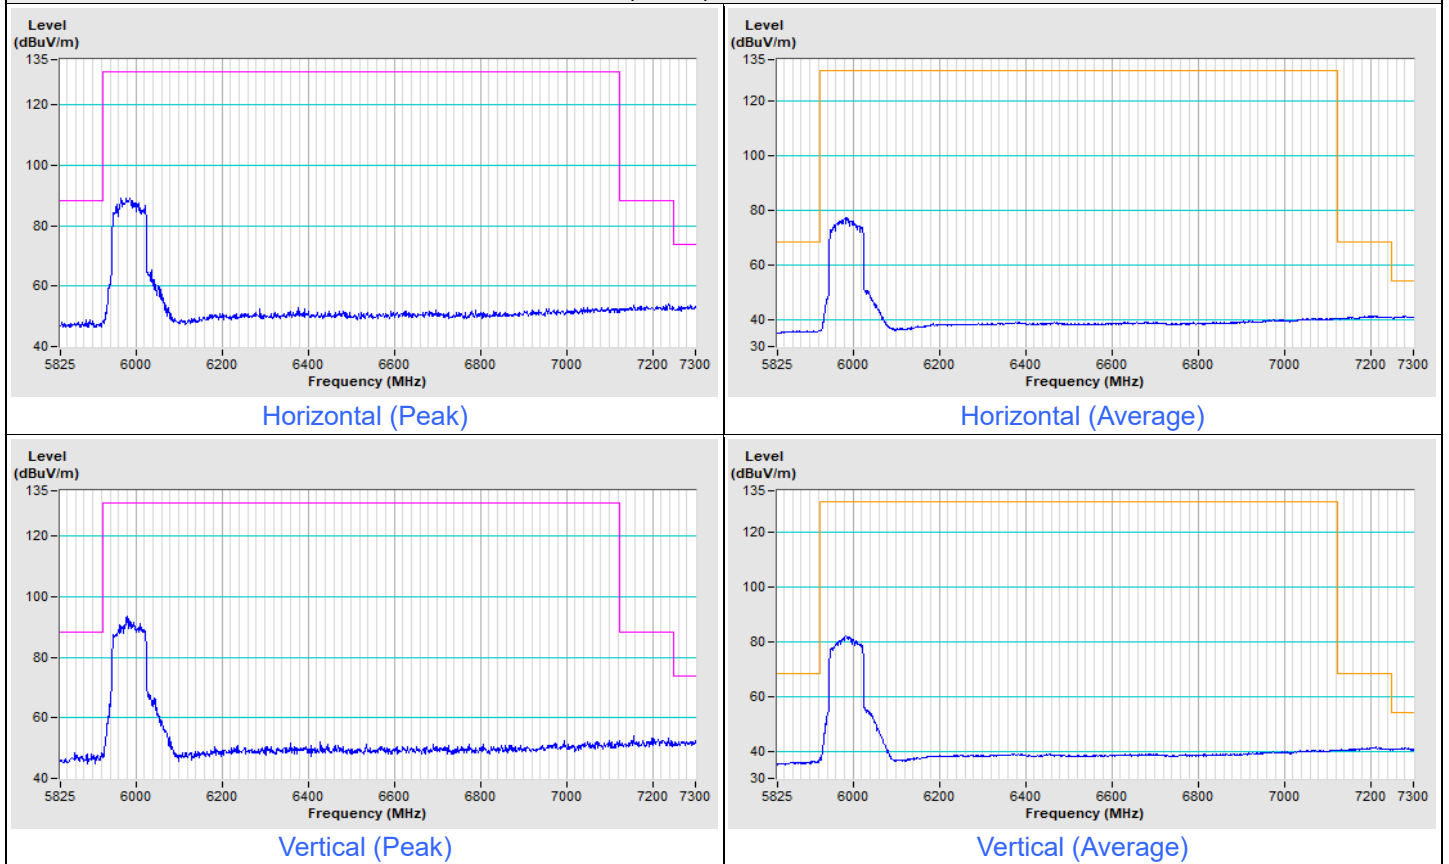


802.11ax (HE80) Full RU Channel 215

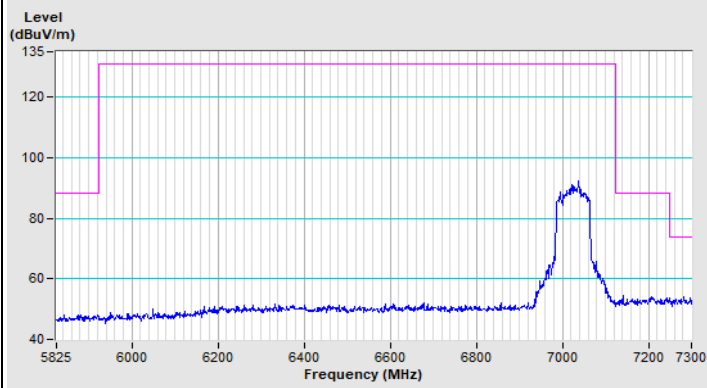


Horizontal (Peak)

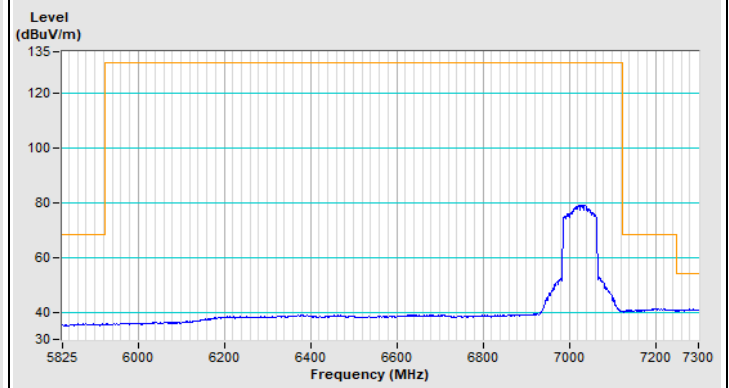

Horizontal (Average)

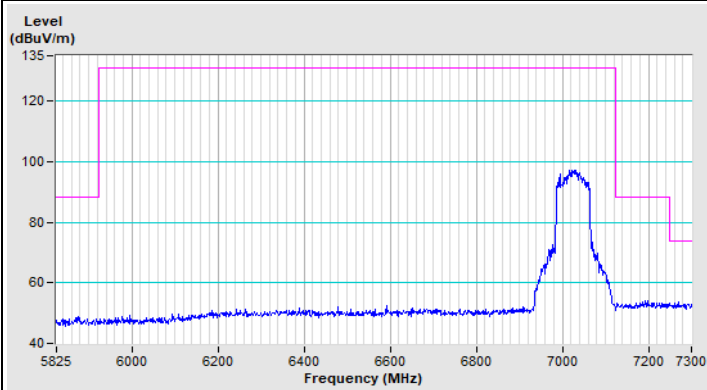


Vertical (Peak)

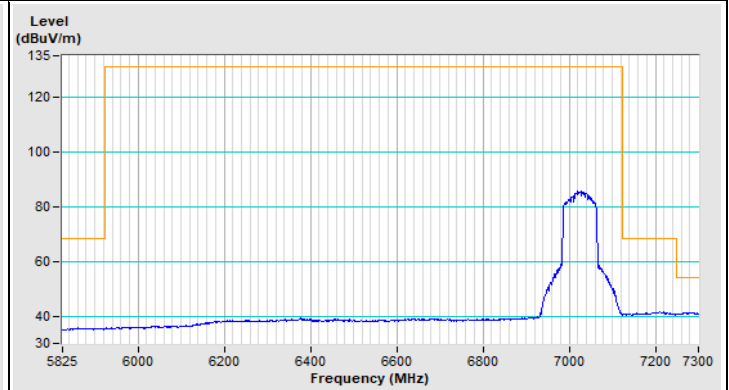


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE160) Full RU Channel 15

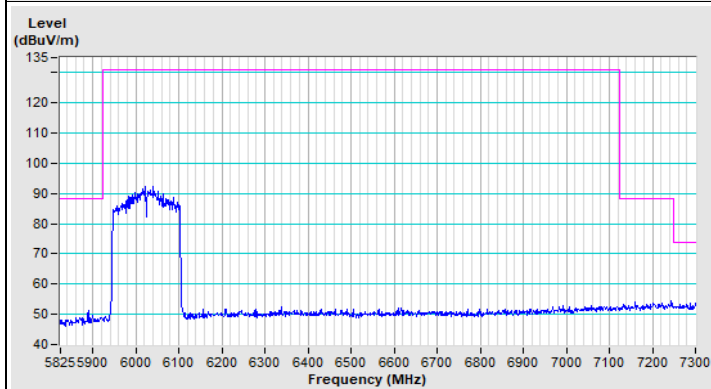


Horizontal (Peak)

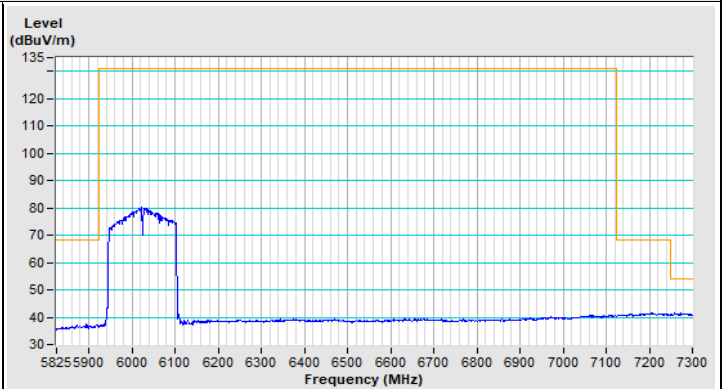

Horizontal (Average)

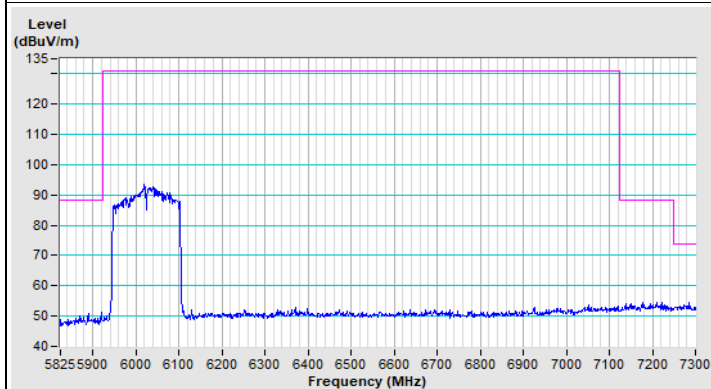


Vertical (Peak)

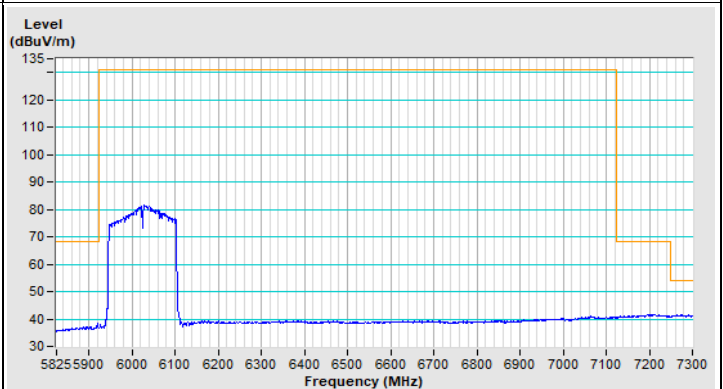


Vertical (Average)


802.11ax (HE160) Full RU Channel 207

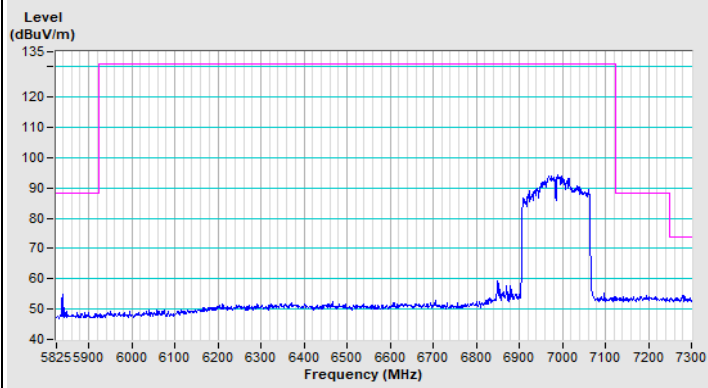


Horizontal (Peak)

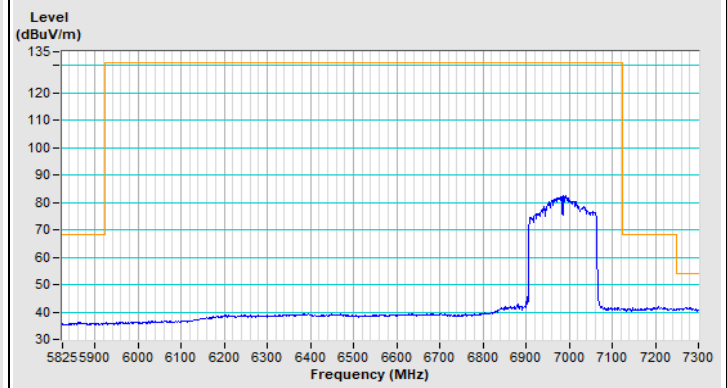

Horizontal (Average)

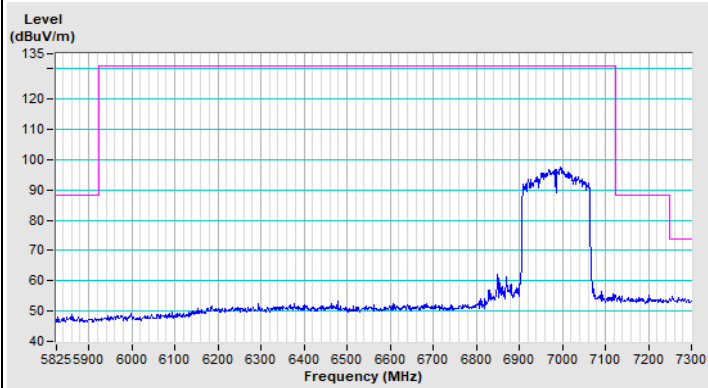


Vertical (Peak)

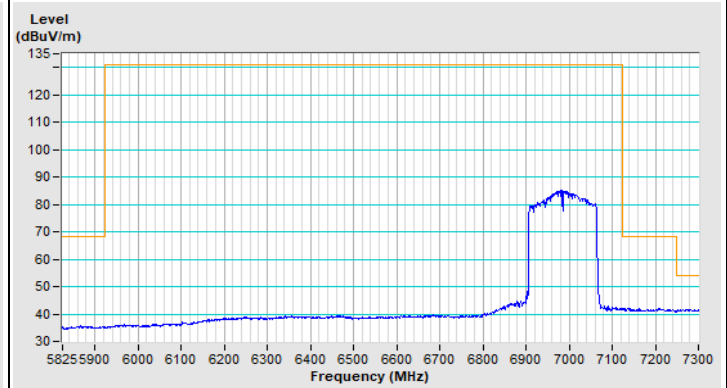


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE20) 26-tone RU Channel 1

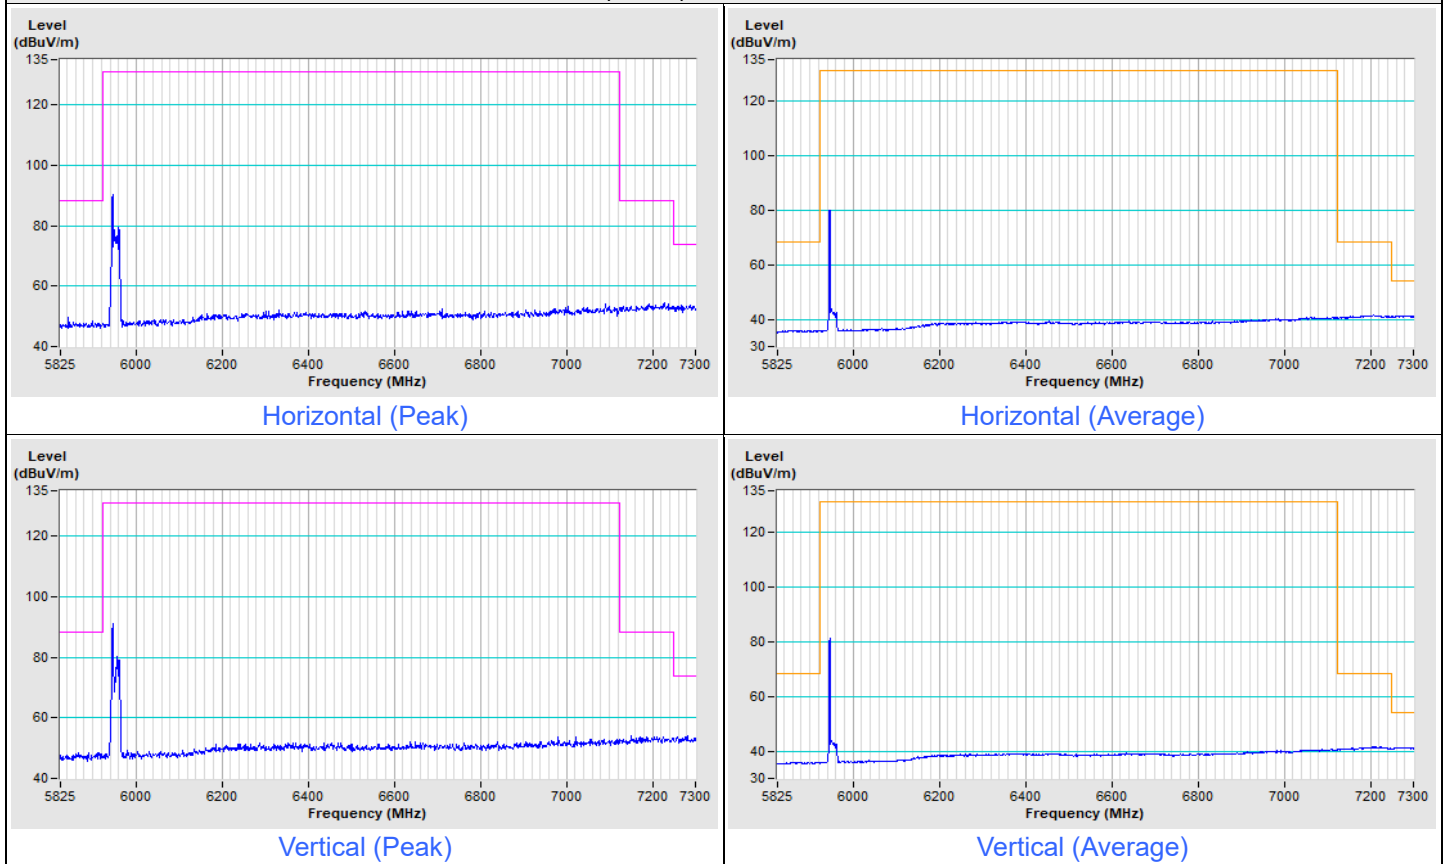


802.11ax (HE20) 26-tone RU Channel 233

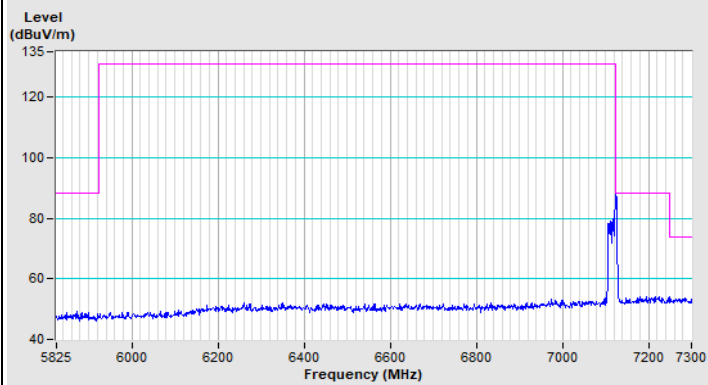


Horizontal (Peak)

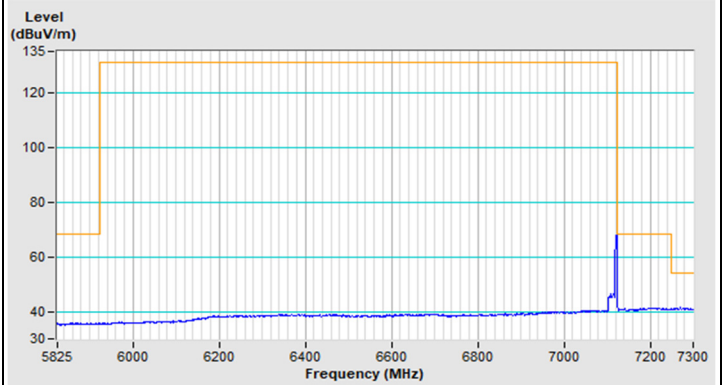

Horizontal (Average)

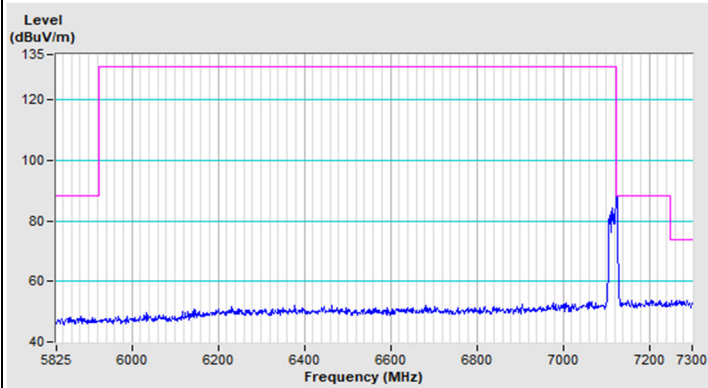


Vertical (Peak)

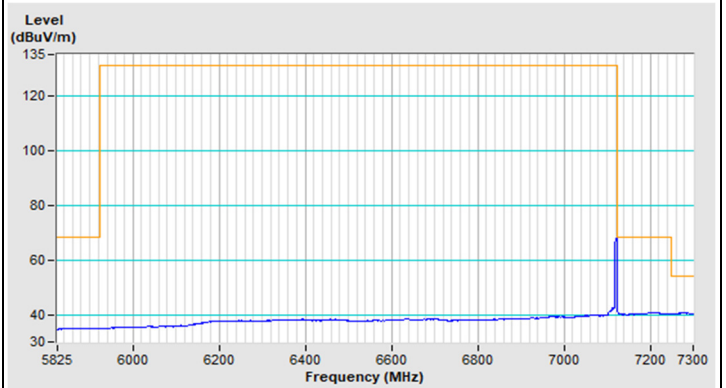


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE20) 52-tone RU Channel 1

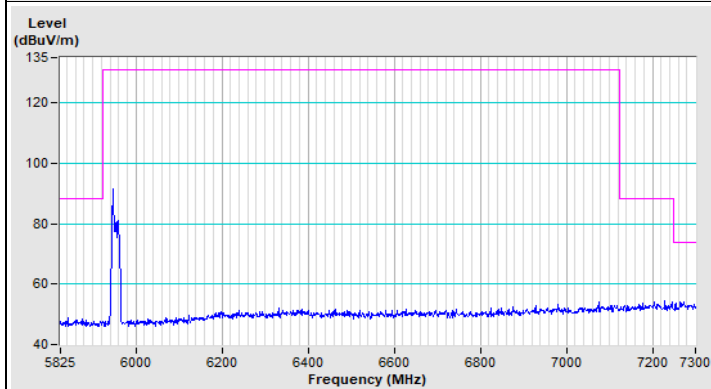


Horizontal (Peak)

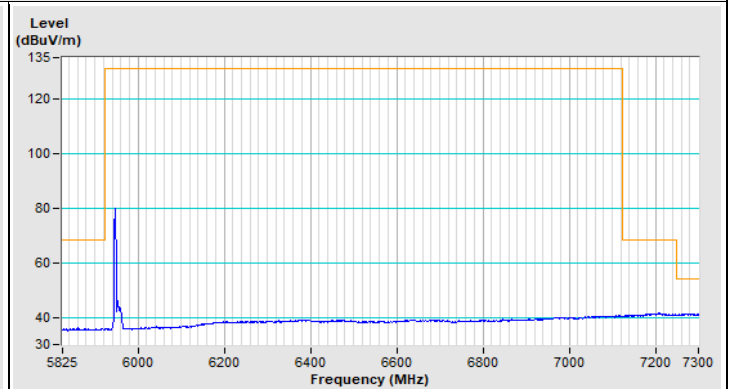

Horizontal (Average)

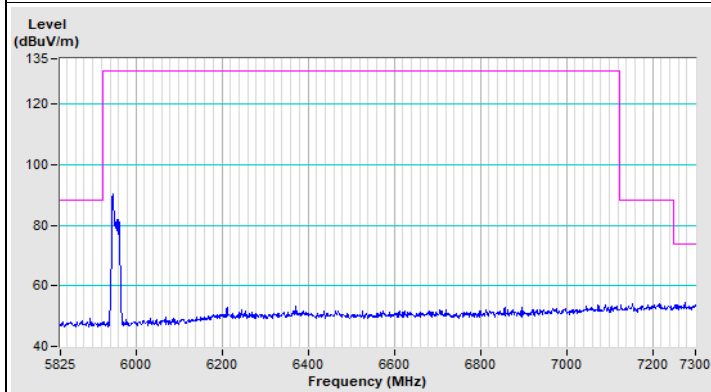

Vertical (Peak)

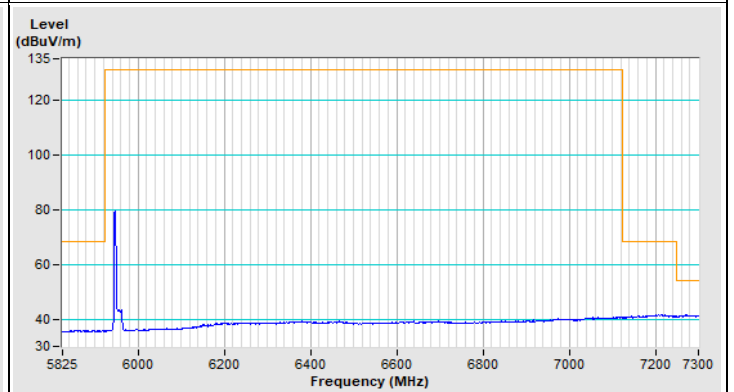

Vertical (Average)