



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#1746.67	43.58 PK	88.26	-44.68	-71.9	-60.35	8.37	-51.68
2	#1746.67	41.68 AV	68.26	-26.58	-85.61	-61.96	8.37	-53.58
3	7275.42	38.27 PK	74	-35.73	-68.84	-67.95	8.37	-56.99
4	7275.42	26.31 AV	54	-27.69	-82.61	-78.85	8.37	-68.95
5	19054.3	39.45 PK	74	-34.55	-68.69	-66.07	8.37	-55.81
6	19054.3	28.67 AV	54	-25.33	-76.74	-79.7	8.37	-66.59
7	23849.2	41.04 PK	74	-32.96	-65.84	-65.38	8.37	-54.22
8	23849.2	30.38 AV	54	-23.62	-75.39	-77.36	8.37	-64.88
9	39558.4	36.02 PK	74	-37.98	-71.1	-70.19	8.37	-59.24
10	39558.4	25.01 AV	54	-28.99	-83.63	-80.26	8.37	-70.25

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

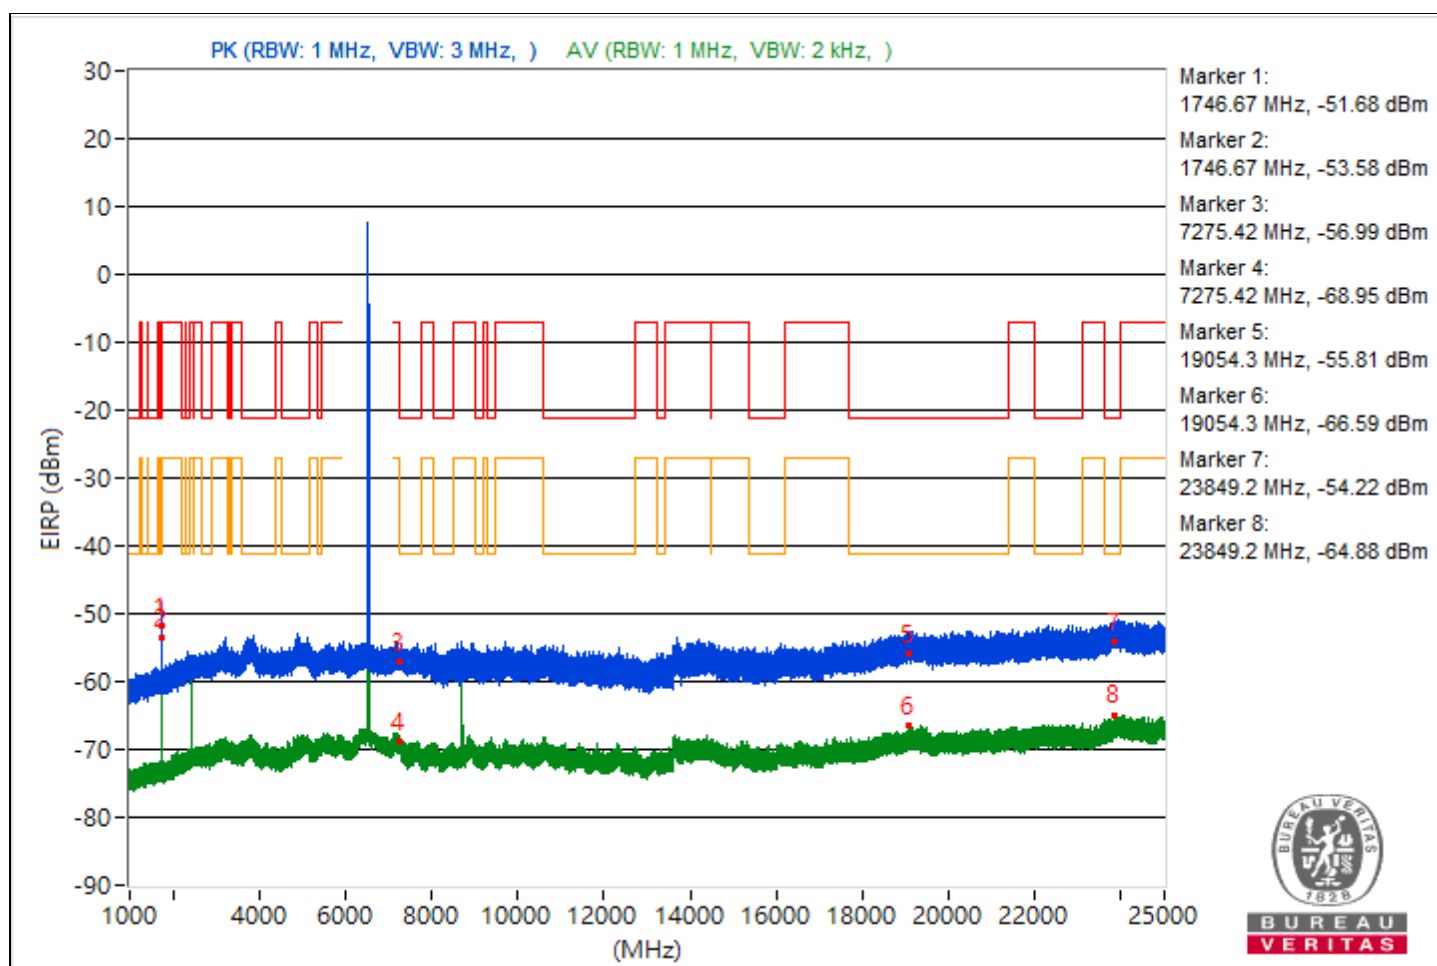

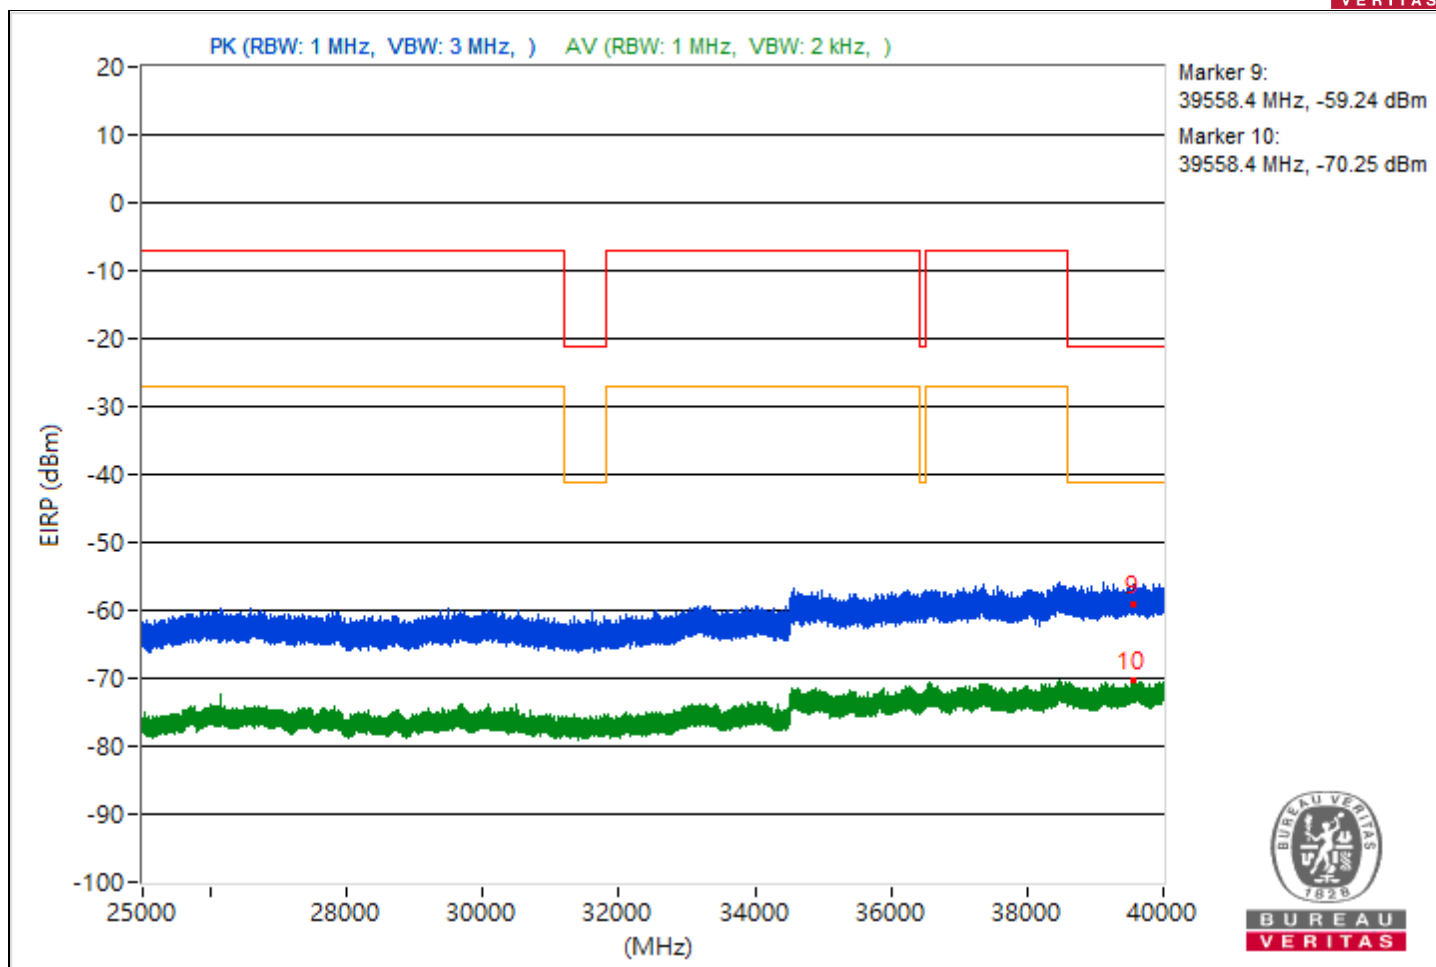



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5787.38	37.95 PK	88.26	-50.31	-68.85	-68.54	8.37	-57.31
2	#5787.38	40.28 AV	68.26	-27.98	-63.41	-81.72	8.37	-54.98
3	9166.67	44 PK	74	-30	-60.22	-68.57	8.37	-51.26
4	9166.67	34.23 AV	54	-19.77	-69.95	-78.65	8.37	-61.03
5	19093.6	41.09 PK	74	-32.91	-65.67	-65.44	8.37	-54.17
6	19093.6	28.1 AV	54	-25.9	-77.24	-80.39	8.37	-67.16
7	23936.8	43.1 PK	74	-30.9	-63.28	-63.82	8.37	-52.16
8	23936.8	29.8 AV	54	-24.2	-75.64	-78.52	8.37	-65.46
9	39752.09	35.63 PK	74	-38.37	-70.78	-71.25	8.37	-59.63
10	39752.09	24.59 AV	54	-29.41	-80.74	-83.92	8.37	-70.67

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

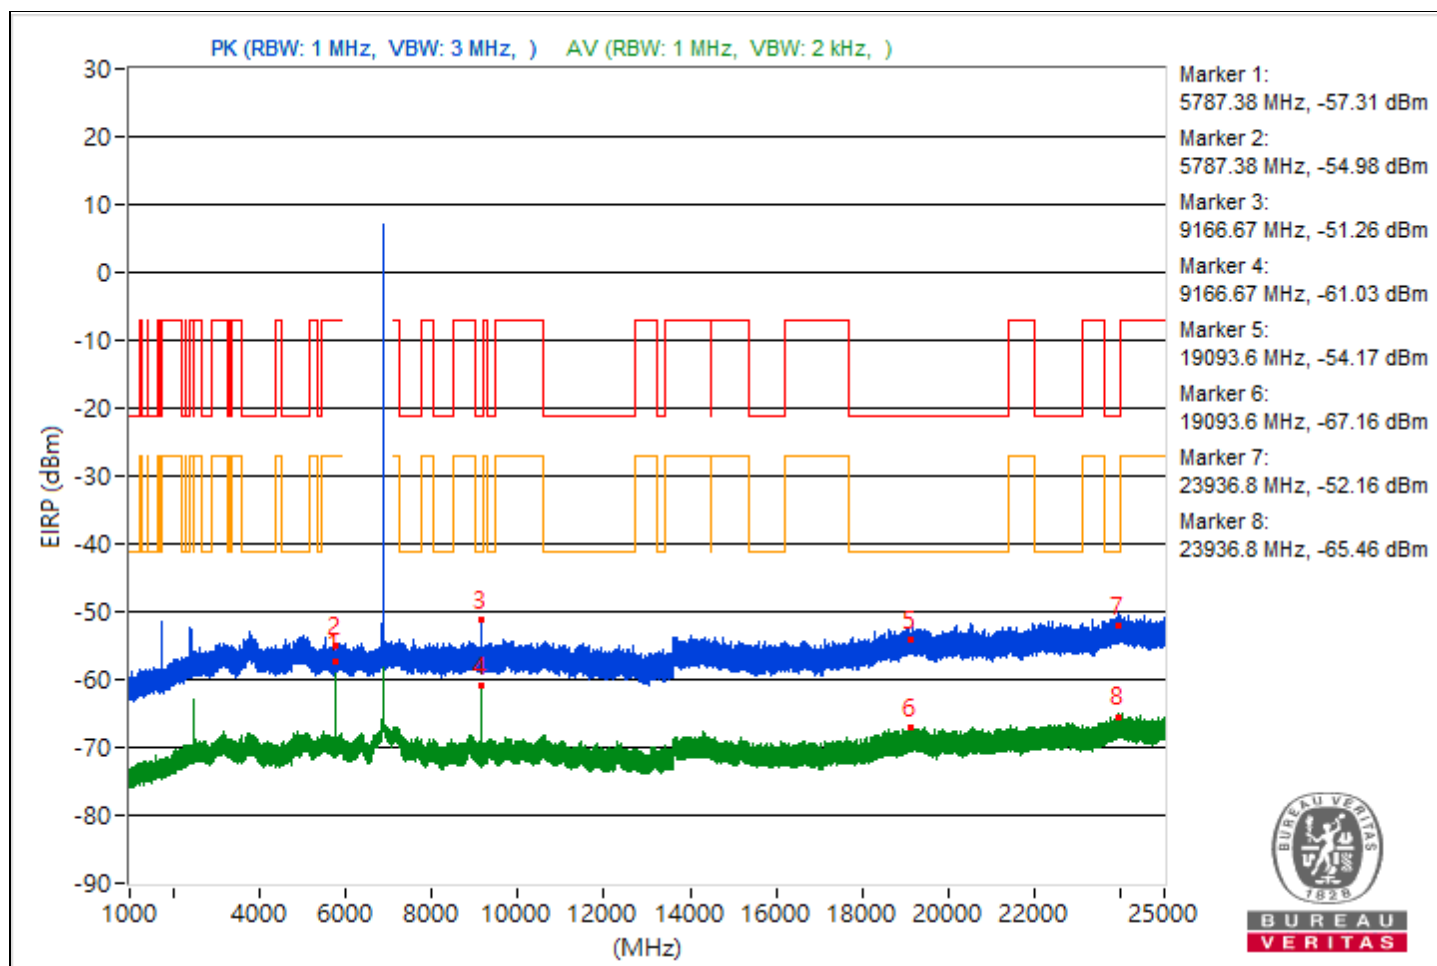


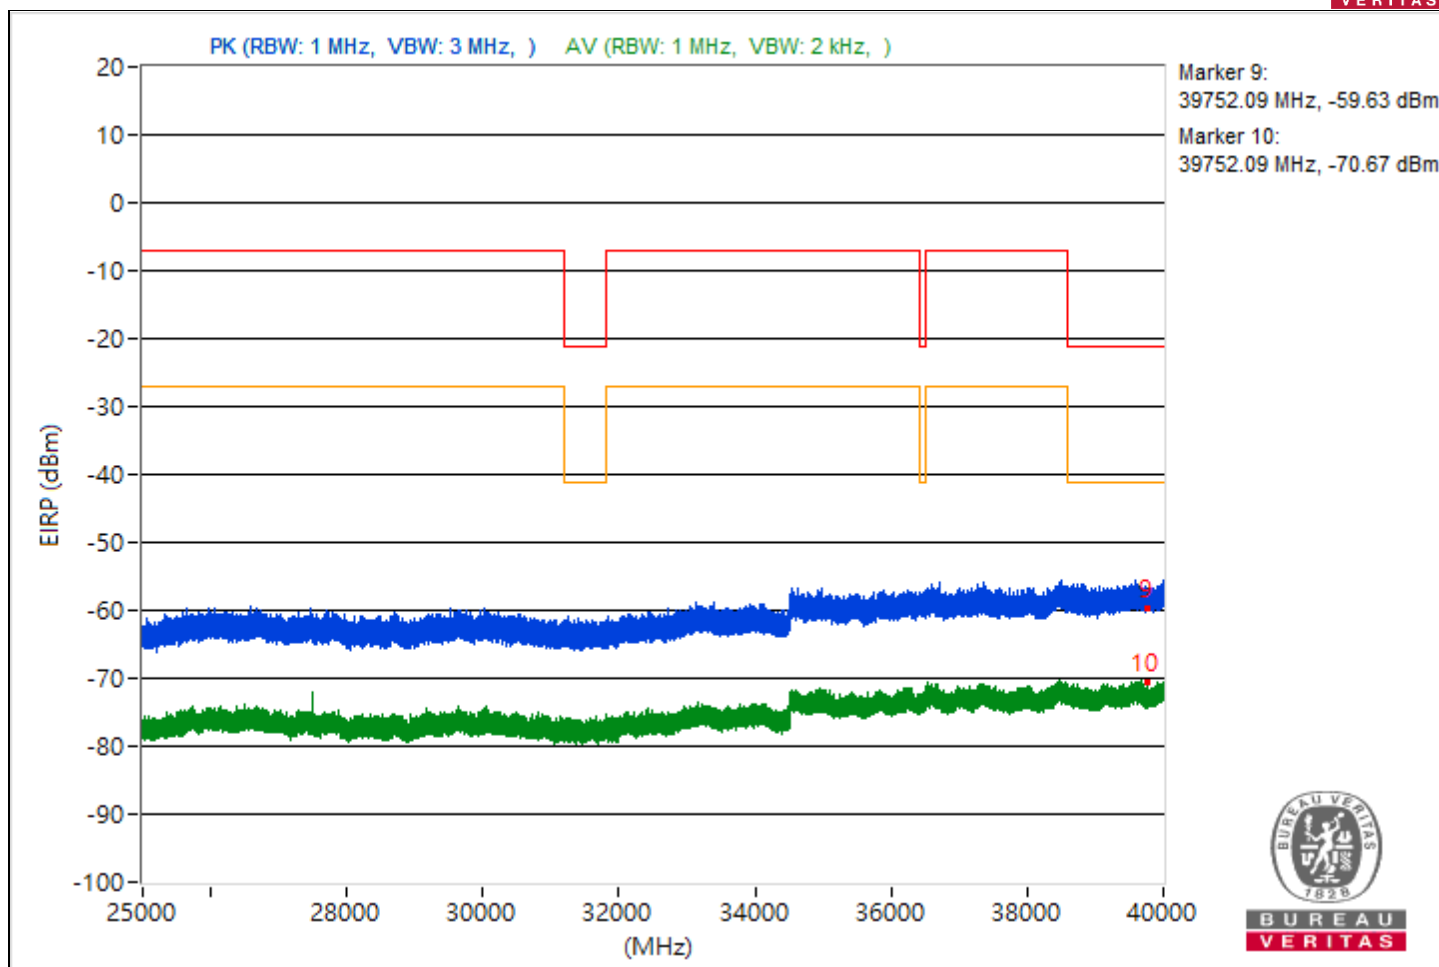


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.57	39.85 PK	74	-34.15	-67.61	-66.11	8.37	-55.41
2	3795.57	27.35 AV	54	-26.65	-78.46	-80.32	8.37	-67.91
3	9326.58	40.79 PK	74	-33.21	-64.38	-68.1	8.37	-54.47
4	9326.58	33.77 AV	54	-20.23	-70.53	-78.26	8.37	-61.49
5	18446.6	40.92 PK	74	-33.08	-67.04	-64.71	8.37	-54.34
6	18446.6	28.27 AV	54	-25.73	-80.39	-77	8.37	-66.99
7	23931.7	42.27 PK	74	-31.73	-65.44	-63.51	8.37	-52.99
8	23931.7	30.38 AV	54	-23.62	-78.96	-74.61	8.37	-64.88
9	39169.42	36.39 PK	74	-37.61	-70.02	-70.49	8.37	-58.87
10	39169.42	25.16 AV	54	-28.84	-80.67	-82.47	8.37	-70.1

Note: Margin value = Emission Level - Limit value

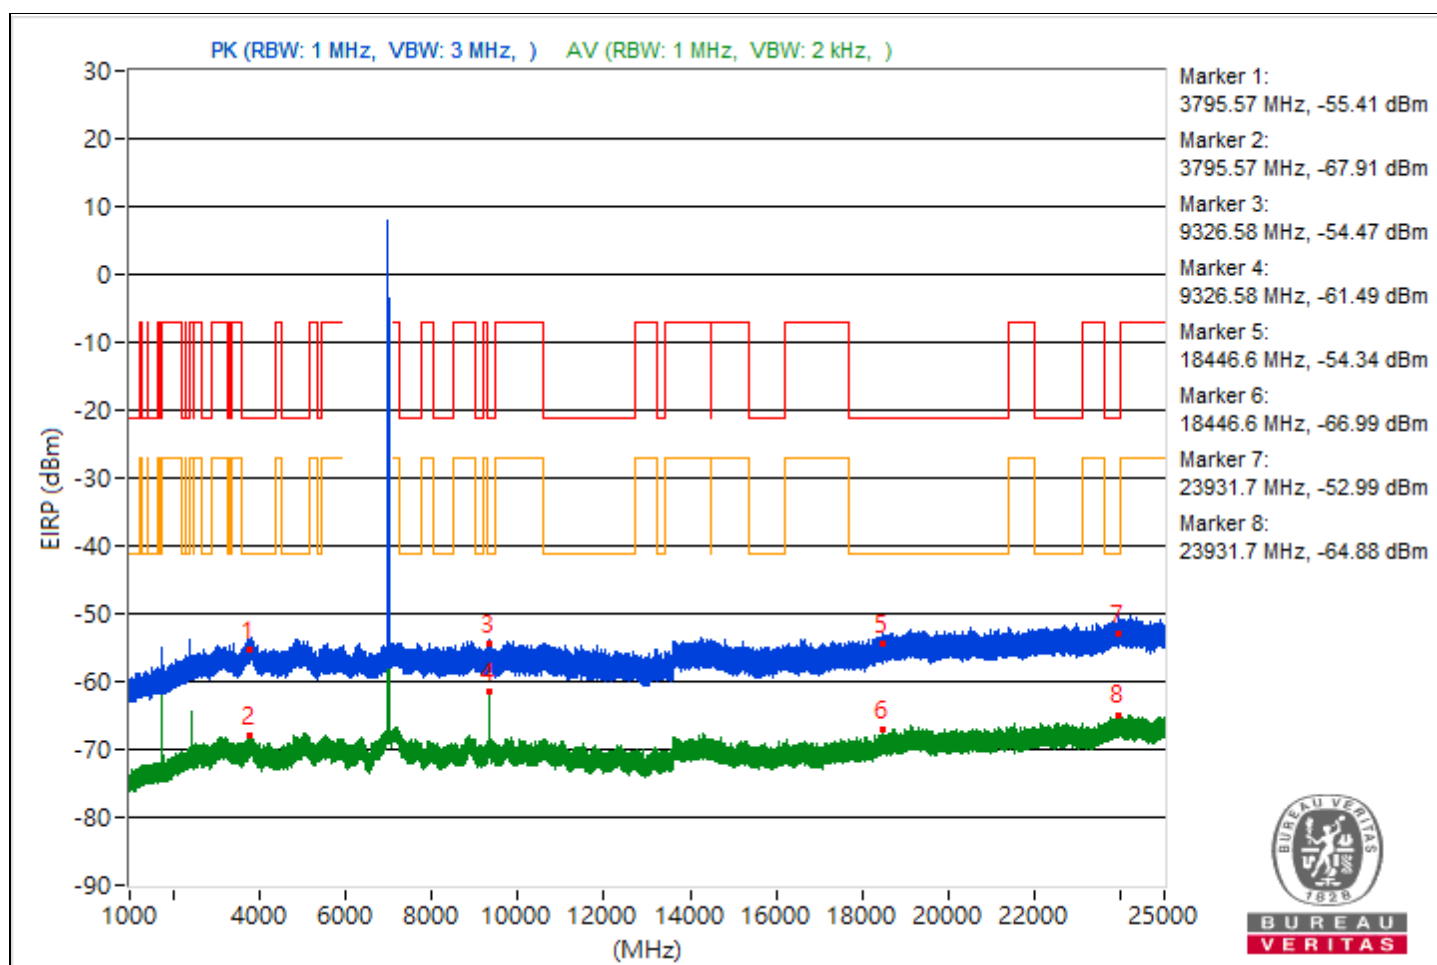

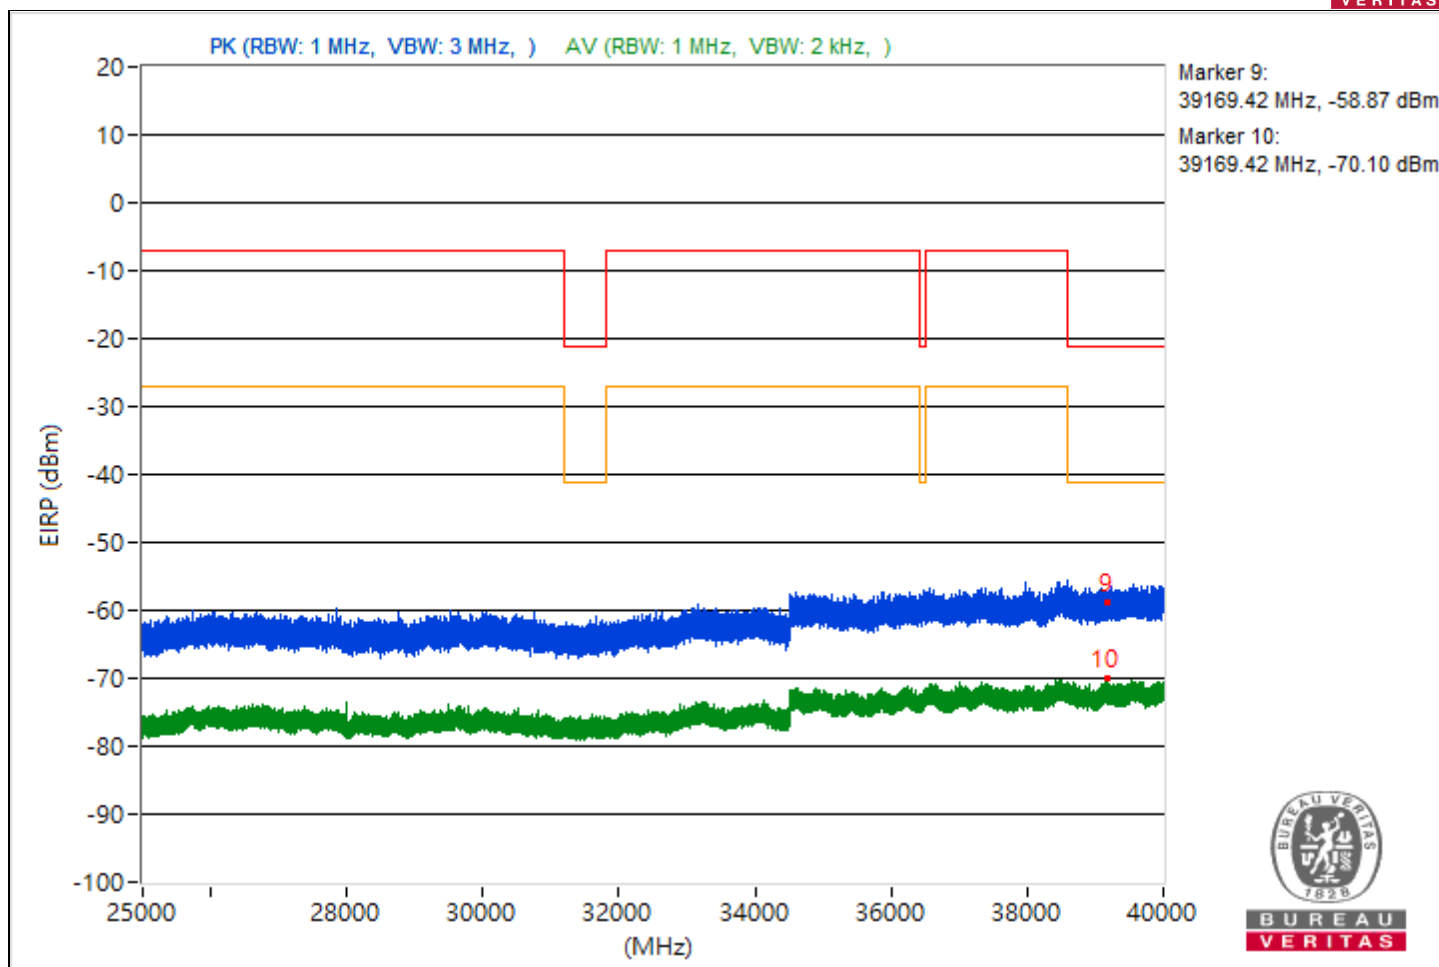



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#1752.89	36.31 PK	88.26	-51.95	-72.03	-69.11	8.37	-58.95
2	#1752.89	40.24 AV	68.26	-28.02	-84.66	-63.43	8.37	-55.02
3	9486.31	39.64 PK	74	-34.36	-65.97	-68.34	8.37	-55.62
4	9486.31	30.36 AV	54	-23.64	-73.9	-82.01	8.37	-64.9
5	20879.8	38.71 PK	74	-35.29	-67.55	-68.34	8.37	-56.55
6	20879.8	28.16 AV	54	-25.84	-79.69	-77.53	8.37	-67.1
7	23995.9	41.33 PK	74	-32.67	-64.69	-66.03	8.37	-53.93
8	23995.9	29.71 AV	54	-24.29	-78.62	-75.71	8.37	-65.55
9	39579.82	37.18 PK	74	-36.82	-68.32	-71.03	8.37	-58.08
10	39579.82	24.63 AV	54	-29.37	-84.4	-80.48	8.37	-70.63

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

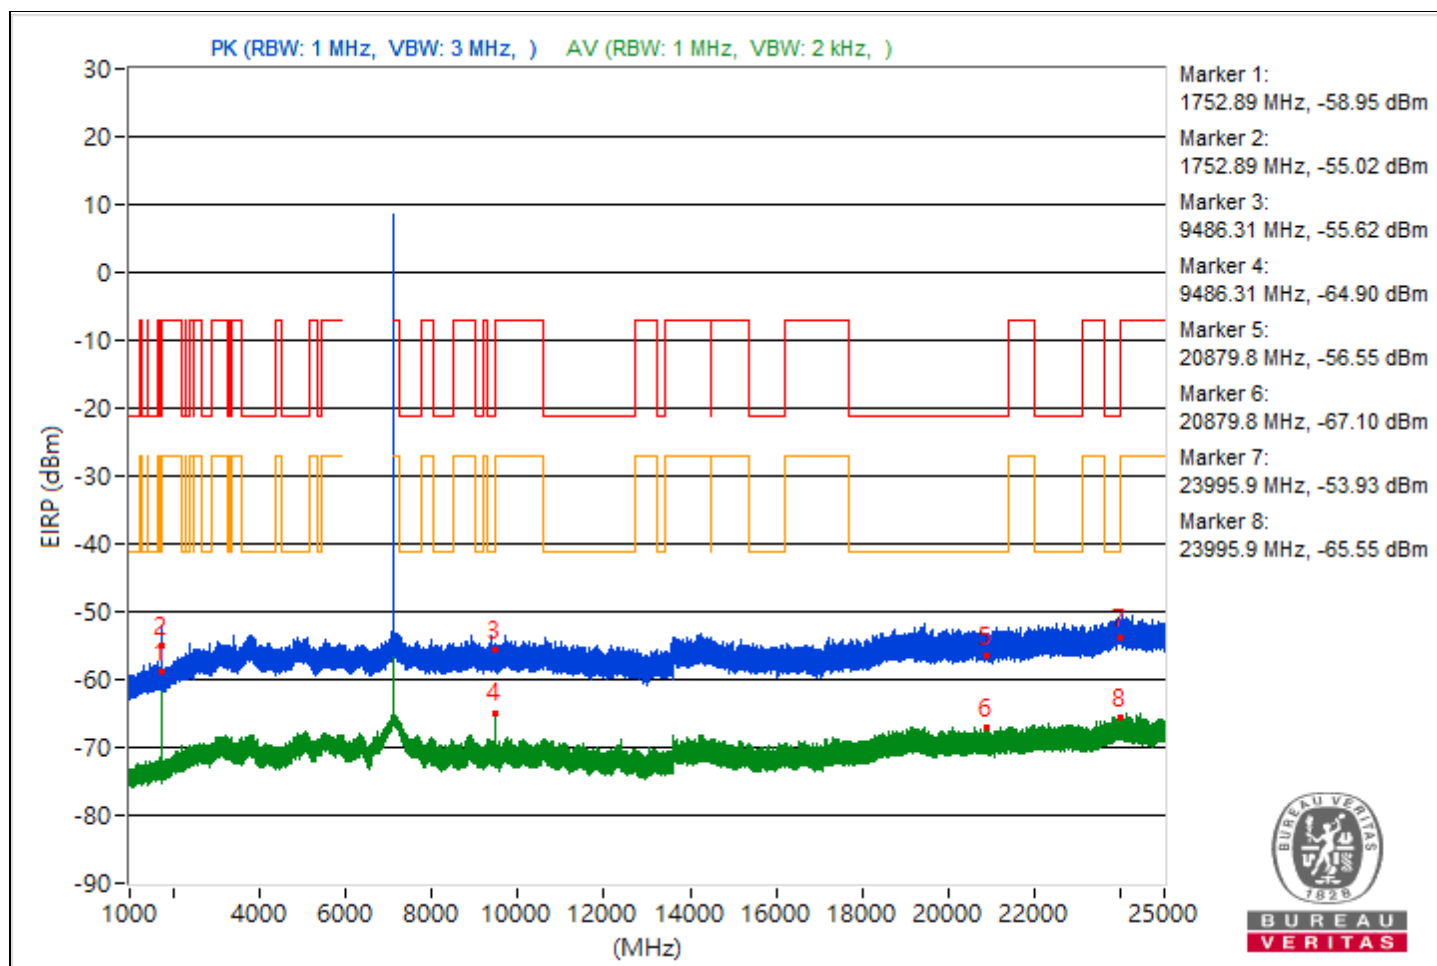

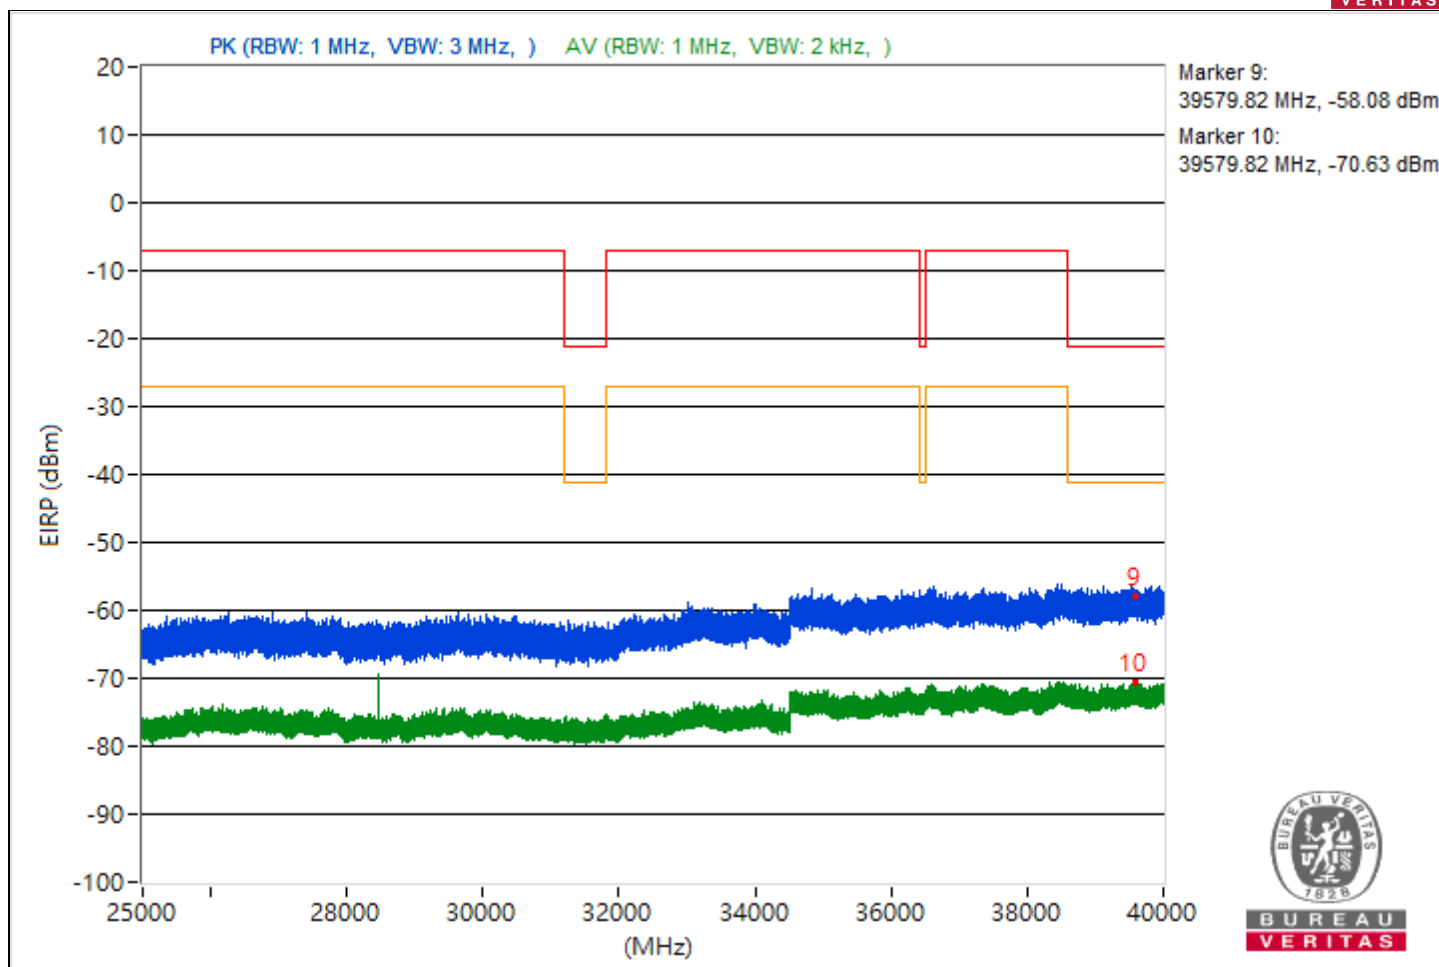



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.29	37.52 PK	74	-36.48	-69.1	-69.14	8.37	-57.74
2	5457.29	29.25 AV	54	-24.75	-77.68	-77.13	8.37	-66.01
3	#7940.03	44.38 PK	88.26	-43.88	-59.64	-69.92	8.37	-50.88
4	#7940.03	42.87 AV	68.26	-25.39	-60.84	-78.13	8.37	-52.39
5	19181.8	39.35 PK	74	-34.65	-66.4	-68.41	8.37	-55.91
6	19181.8	28.61 AV	54	-25.39	-75.96	-82.12	8.37	-66.65
7	23986.4	41.53 PK	74	-32.47	-65.26	-64.96	8.37	-53.73
8	23986.4	29.92 AV	54	-24.08	-77.74	-75.9	8.37	-65.34
9	39999.82	38.12 PK	74	-35.88	-67.73	-69.48	8.37	-57.14
10	39999.82	25.31 AV	54	-28.69	-80.2	-82.87	8.37	-69.95

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

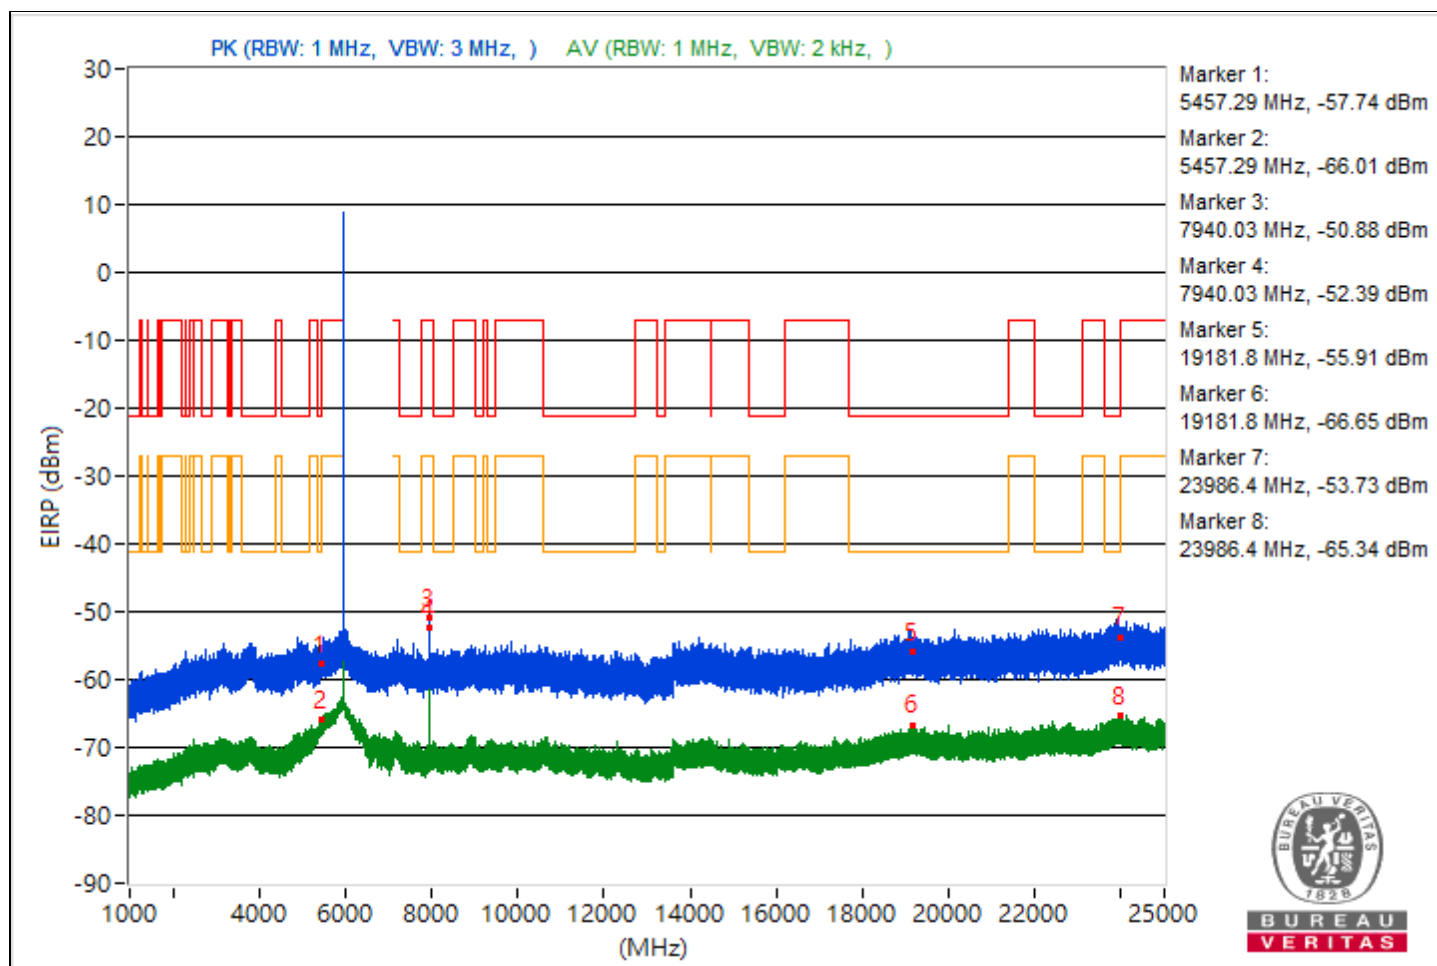


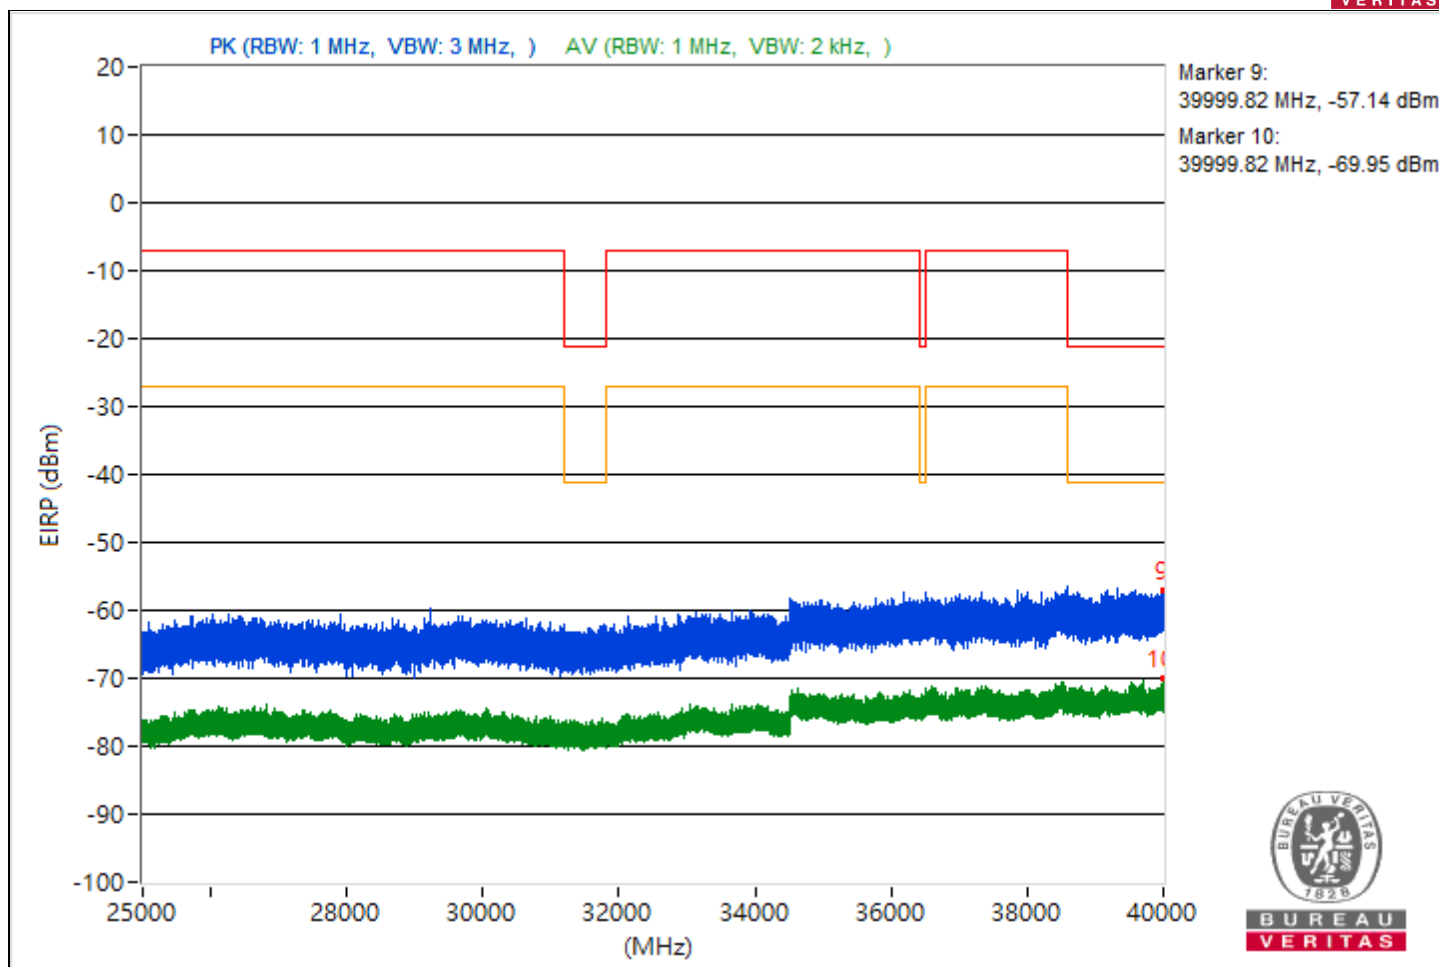


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5437.46	38.43 PK	74	-35.57	-68.12	-68.32	8.37	-56.83
2	5437.46	27.41 AV	54	-26.59	-77.87	-81.22	8.37	-67.85
3	7260.88	37.5 PK	74	-36.5	-70.2	-68.29	8.37	-57.76
4	7260.88	26.71 AV	54	-27.29	-78.65	-81.75	8.37	-68.55
5	20531.8	38.72 PK	74	-35.28	-69.3	-66.87	8.37	-56.54
6	20531.8	27.9 AV	54	-26.1	-81.35	-77.12	8.37	-67.36
7	23938.5	41.73 PK	74	-32.27	-65.23	-64.6	8.37	-53.53
8	23938.5	29.56 AV	54	-24.44	-76.13	-78.29	8.37	-65.7
9	39585.51	36.86 PK	74	-37.14	-70.24	-69.37	8.37	-58.4
10	39585.51	24.48 AV	54	-29.52	-85.2	-80.39	8.37	-70.78

Note: Margin value = Emission Level - Limit value

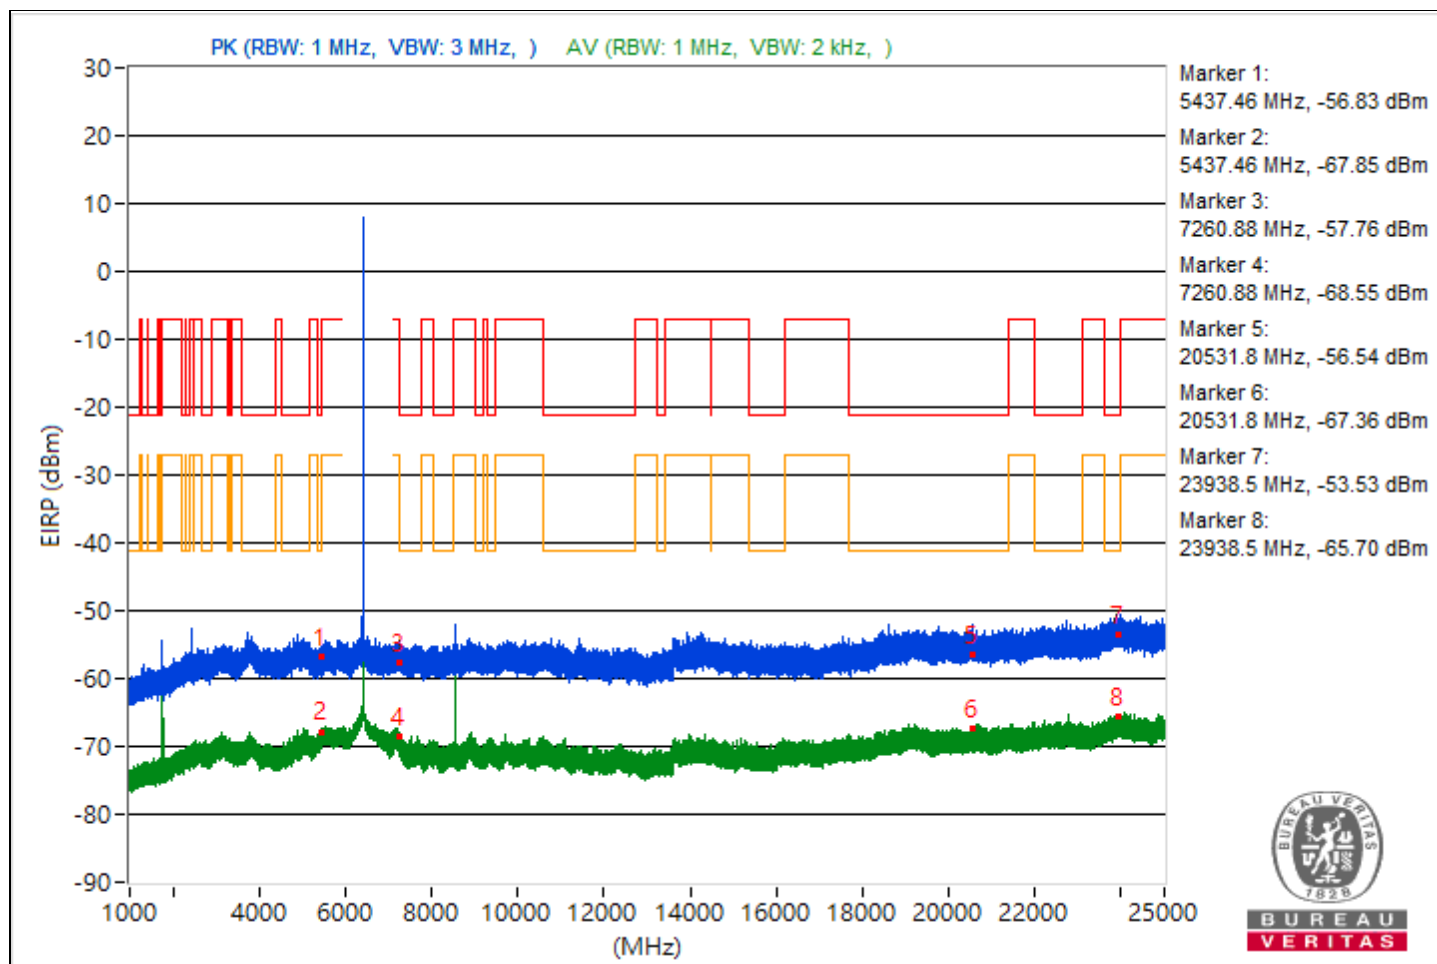


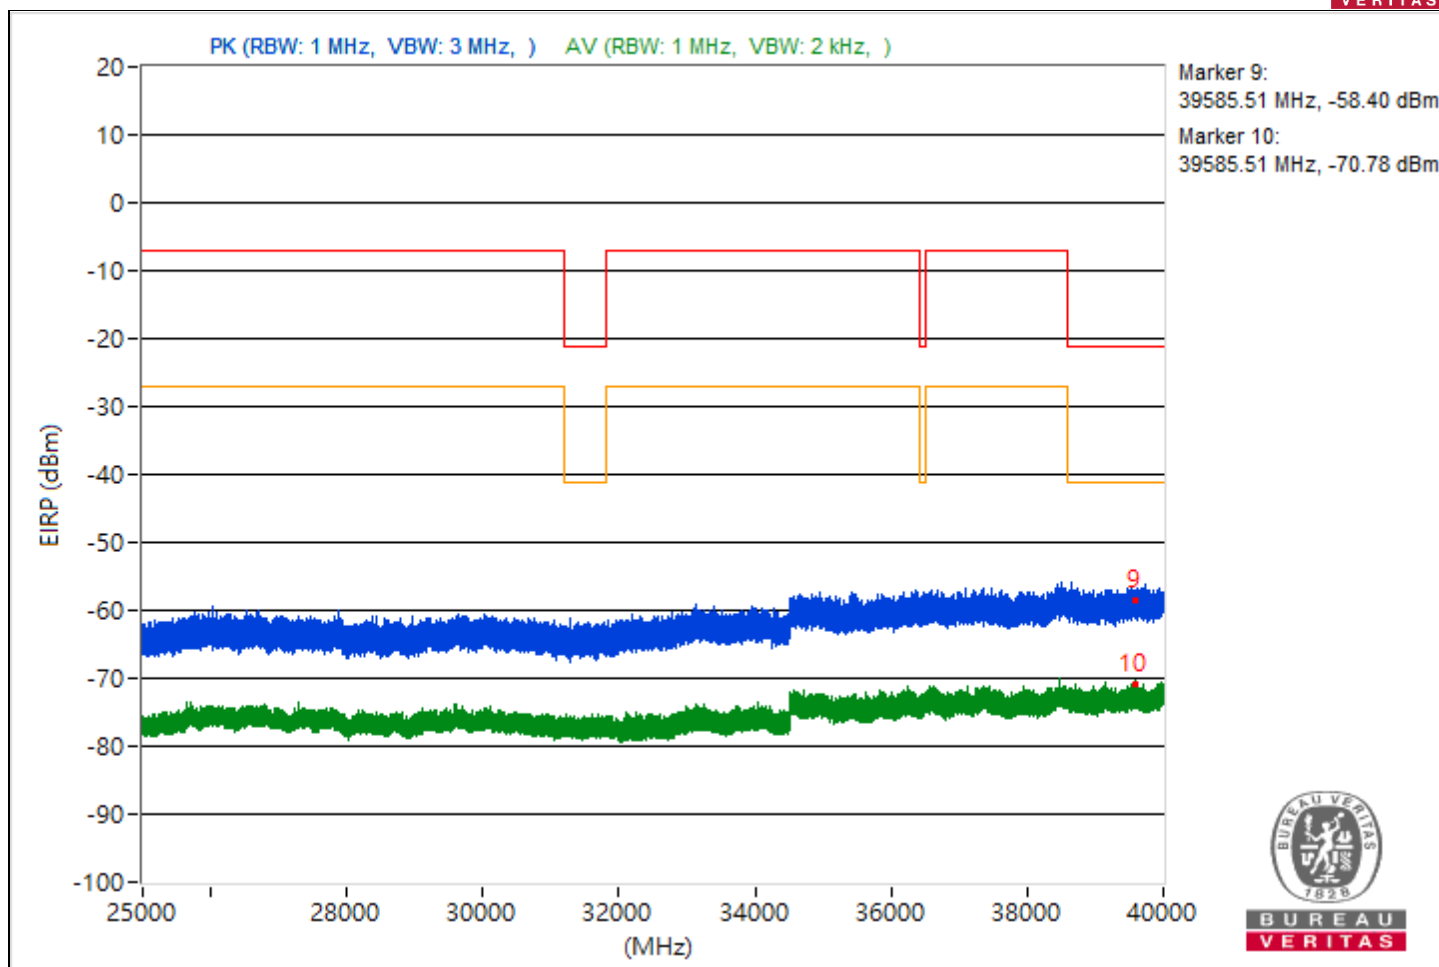


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.91	36.74 PK	74	-37.26	-69.75	-70.06	8.37	-58.52
2	5450.91	28.23 AV	54	-25.77	-79.35	-77.63	8.37	-67.03
3	7259.94	36.54 PK	74	-37.46	-69.9	-70.31	8.37	-58.72
4	7259.94	27.6 AV	54	-26.4	-79.69	-78.47	8.37	-67.66
5	19224.9	39.45 PK	74	-34.55	-67.23	-67.15	8.37	-55.81
6	19224.9	28.76 AV	54	-25.24	-78.56	-77.29	8.37	-66.5
7	23984.4	40.48 PK	74	-33.52	-64.96	-67.84	8.37	-54.78
8	23984.4	30.09 AV	54	-23.91	-75.96	-77.24	8.37	-65.17
9	39641.07	36.23 PK	74	-37.77	-70.36	-70.46	8.37	-59.03
10	39641.07	24.06 AV	54	-29.94	-80.99	-85.09	8.37	-71.2

Note: Margin value = Emission Level - Limit value

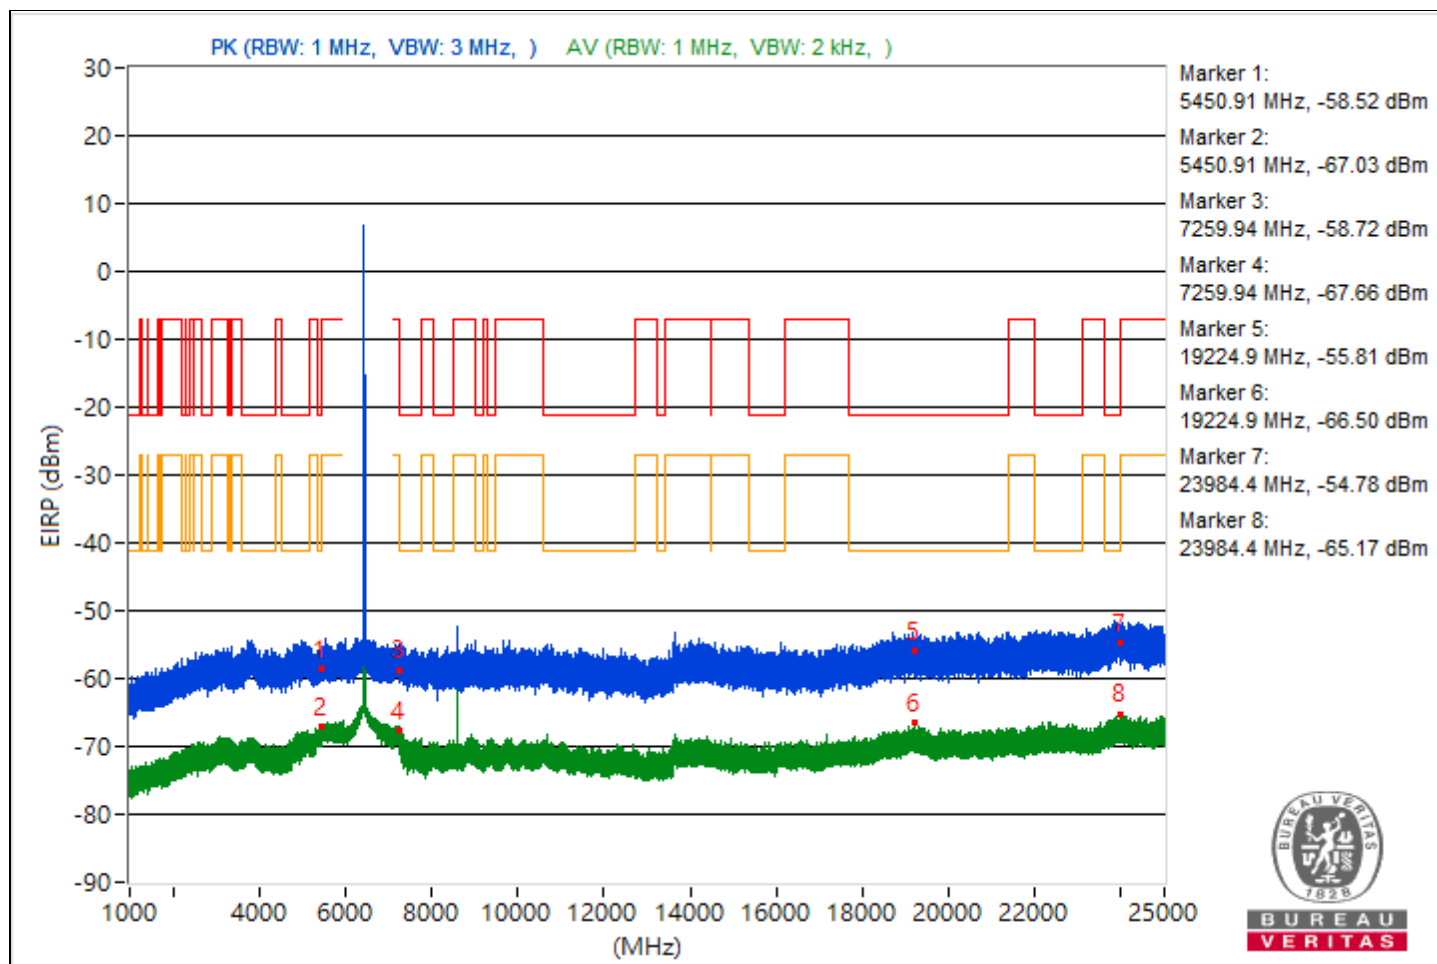


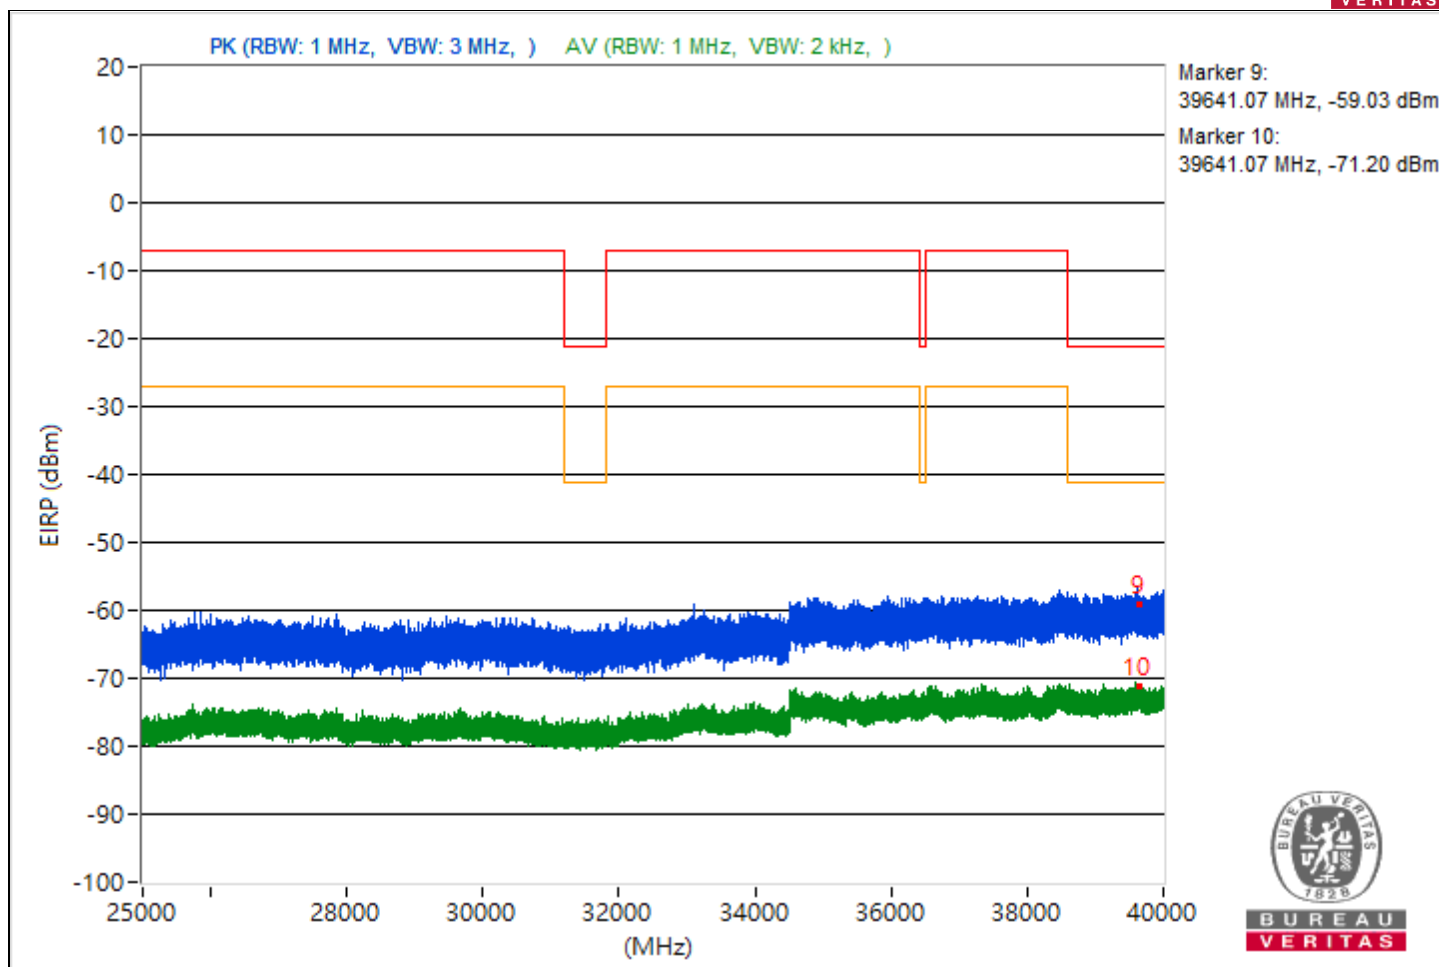


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.61	38.01 PK	74	-35.99	-70.44	-67.36	8.37	-57.25
2	5451.61	28.1 AV	54	-25.9	-77.34	-80.2	8.37	-67.16
3	7260.02	39.49 PK	74	-34.51	-68.79	-65.96	8.37	-55.77
4	7260.02	27.66 AV	54	-26.34	-77.75	-80.72	8.37	-67.6
5	19015.9	38.8 PK	74	-35.2	-68.77	-67.08	8.37	-56.46
6	19015.9	28.38 AV	54	-25.62	-77.25	-79.59	8.37	-66.88
7	24000	41.45 PK	74	-32.55	-66.46	-64.2	8.37	-53.81
8	24000	29.43 AV	54	-24.57	-79.7	-75.64	8.37	-65.83
9	39635.47	36.19 PK	74	-37.81	-71.94	-69.34	8.37	-59.07
10	39635.47	24.45 AV	54	-29.55	-85.03	-80.48	8.37	-70.81

Note: Margin value = Emission Level - Limit value

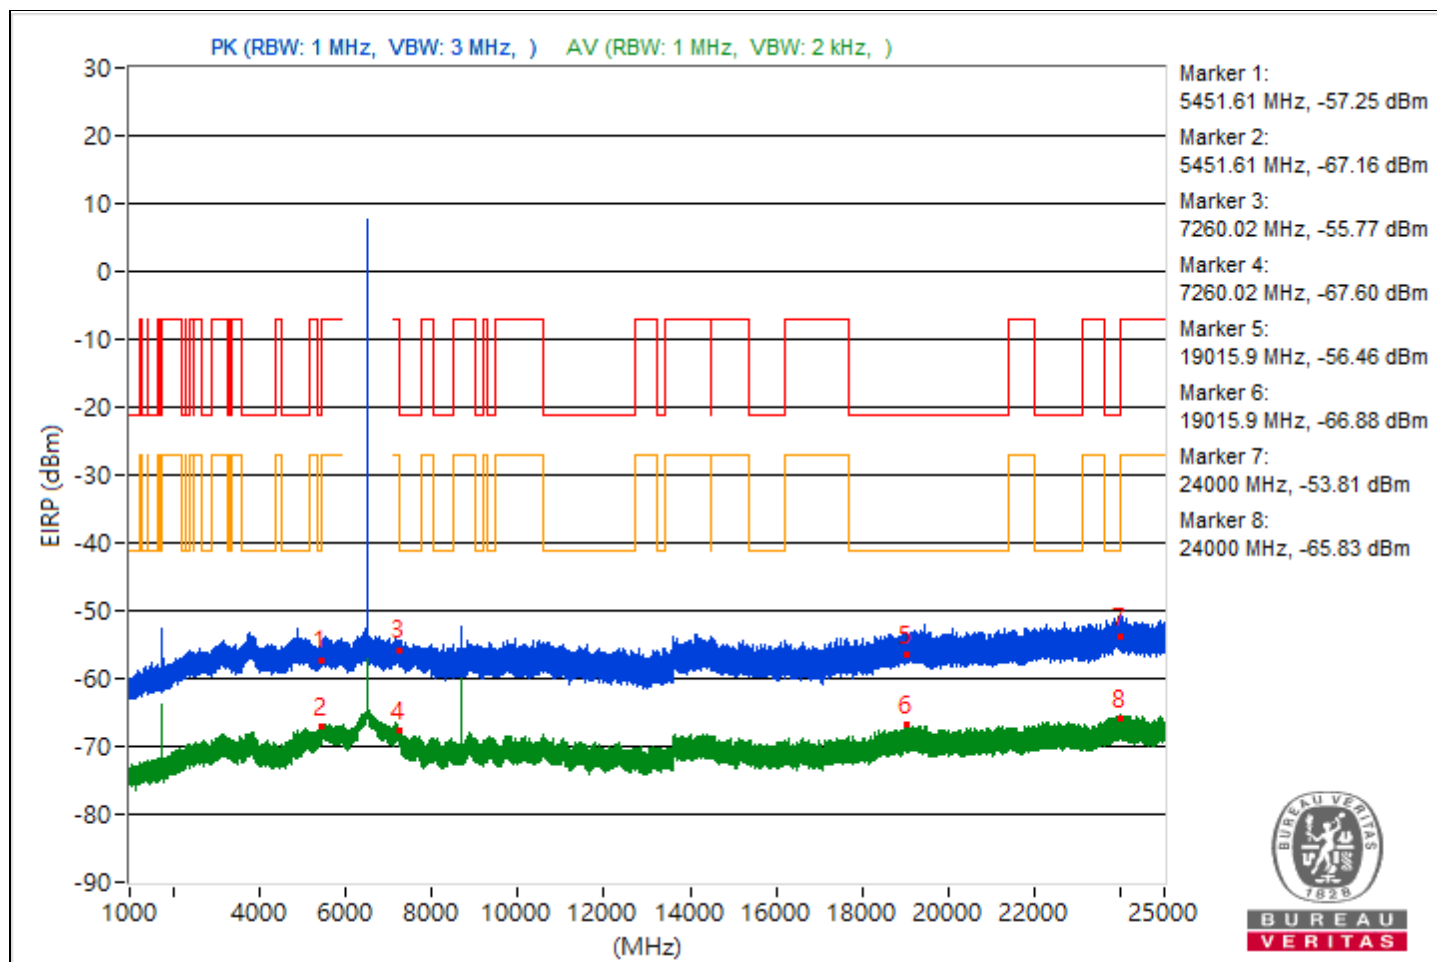


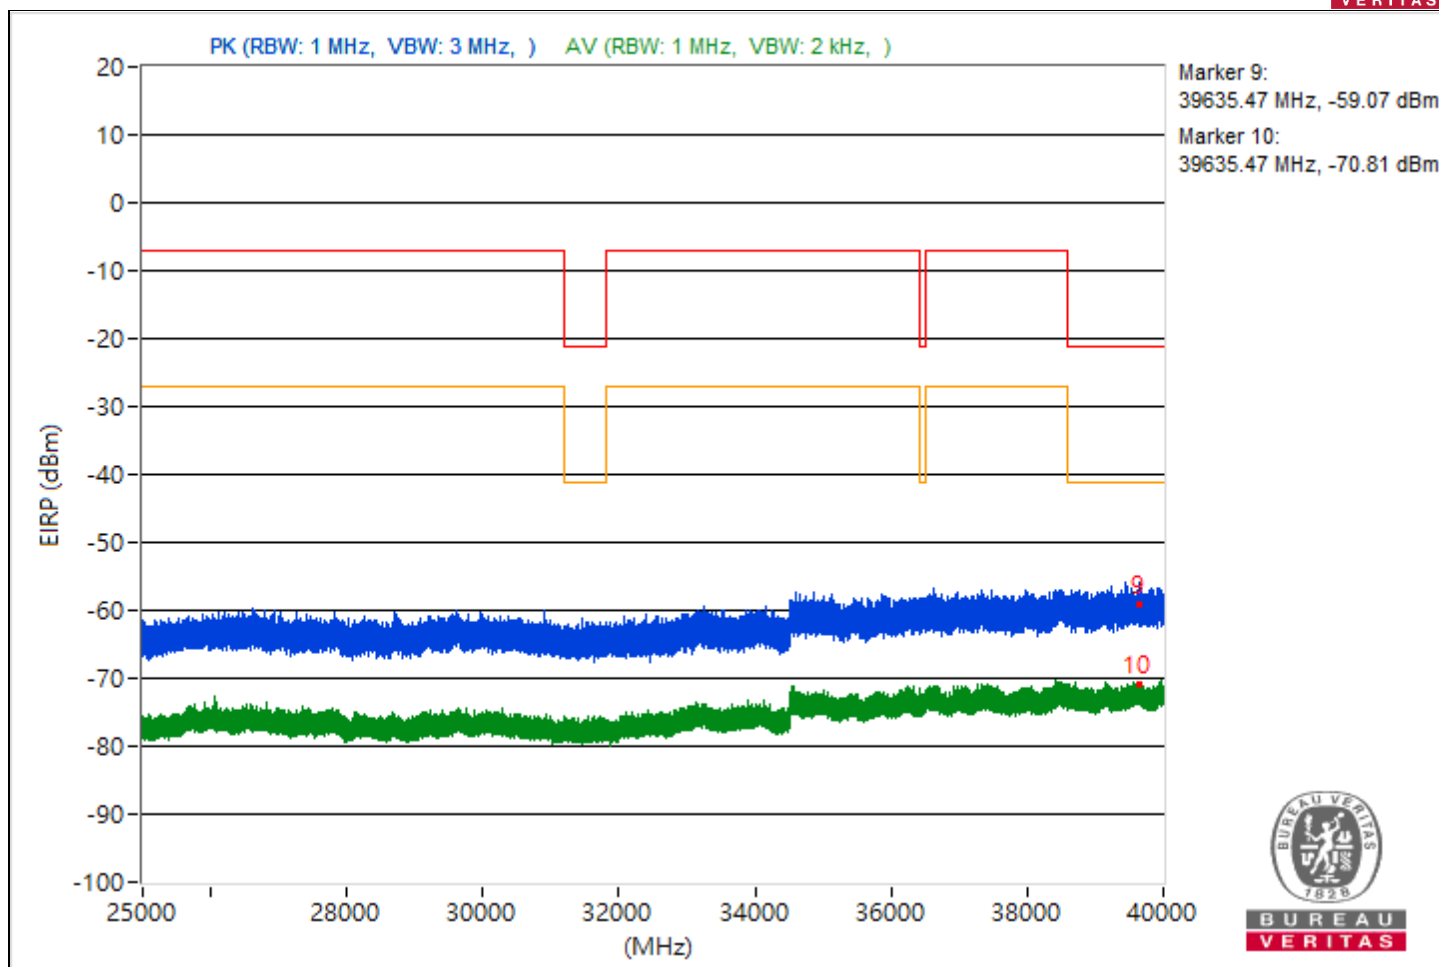


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.34	37.86 PK	74	-36.14	-68.69	-68.87	8.37	-57.4
2	5455.34	28.59 AV	54	-25.41	-77.44	-78.77	8.37	-66.67
3	7257.84	36.78 PK	74	-37.22	-70.35	-69.42	8.37	-58.48
4	7257.84	28.09 AV	54	-25.91	-79.33	-77.89	8.37	-67.17
5	20687.3	38.9 PK	74	-35.1	-68.11	-67.4	8.37	-56.36
6	20687.3	27.64 AV	54	-26.36	-82.47	-77.1	8.37	-67.62
7	23951	39.76 PK	74	-34.24	-68.12	-65.92	8.37	-55.5
8	23951	29.41 AV	54	-24.59	-78.93	-76.01	8.37	-65.85
9	39699.73	34.5 PK	74	-39.5	-70.37	-75.15	8.37	-60.76
10	39699.73	24.33 AV	54	-29.67	-81.11	-83.97	8.37	-70.93

Note: Margin value = Emission Level - Limit value

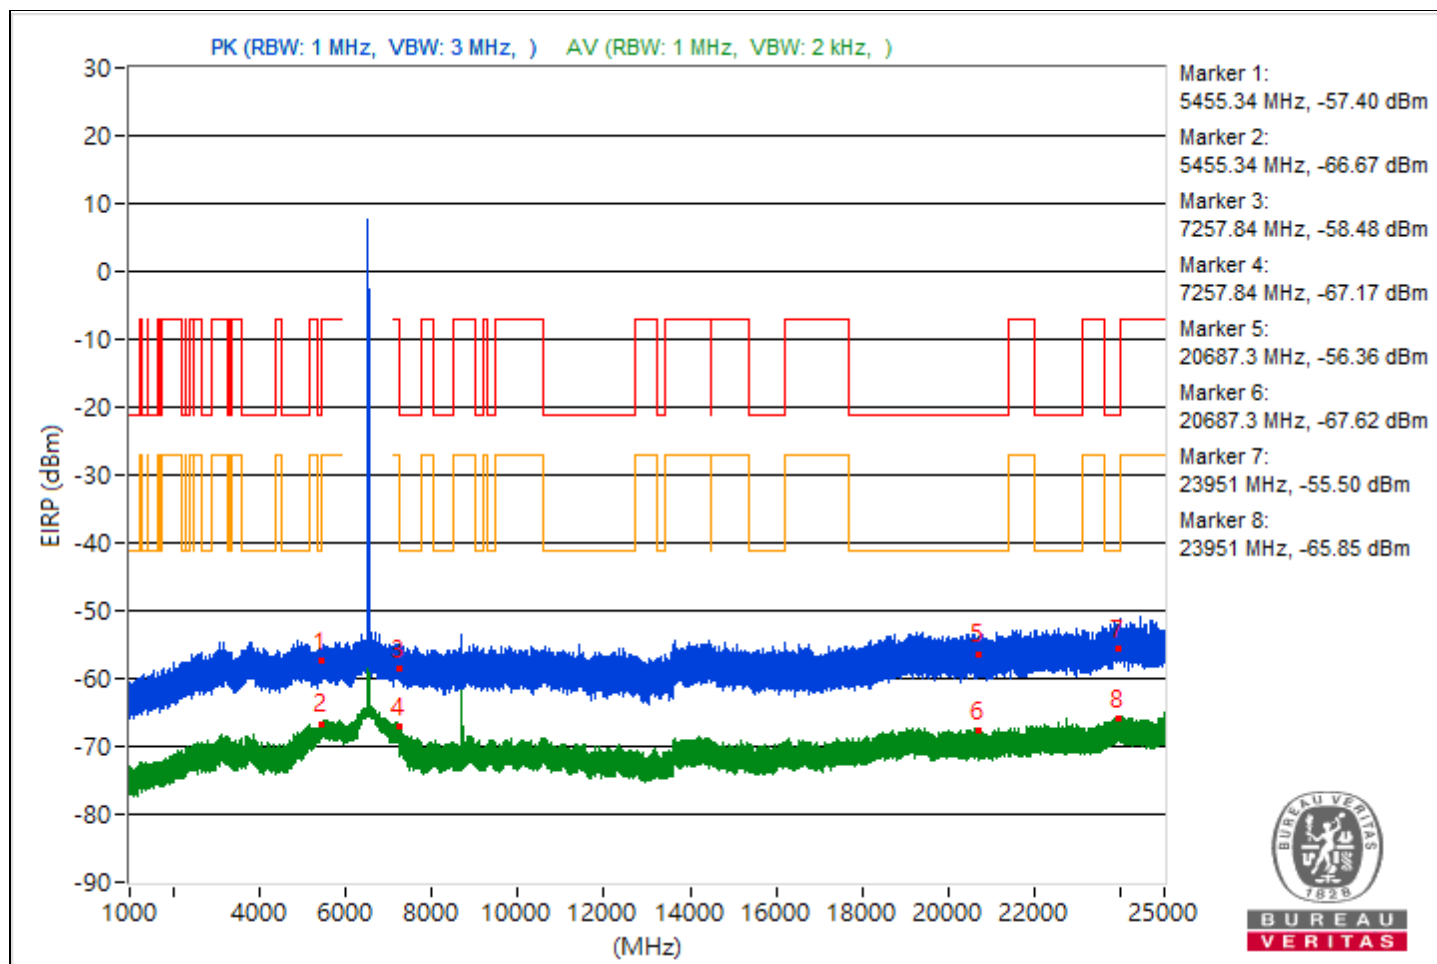


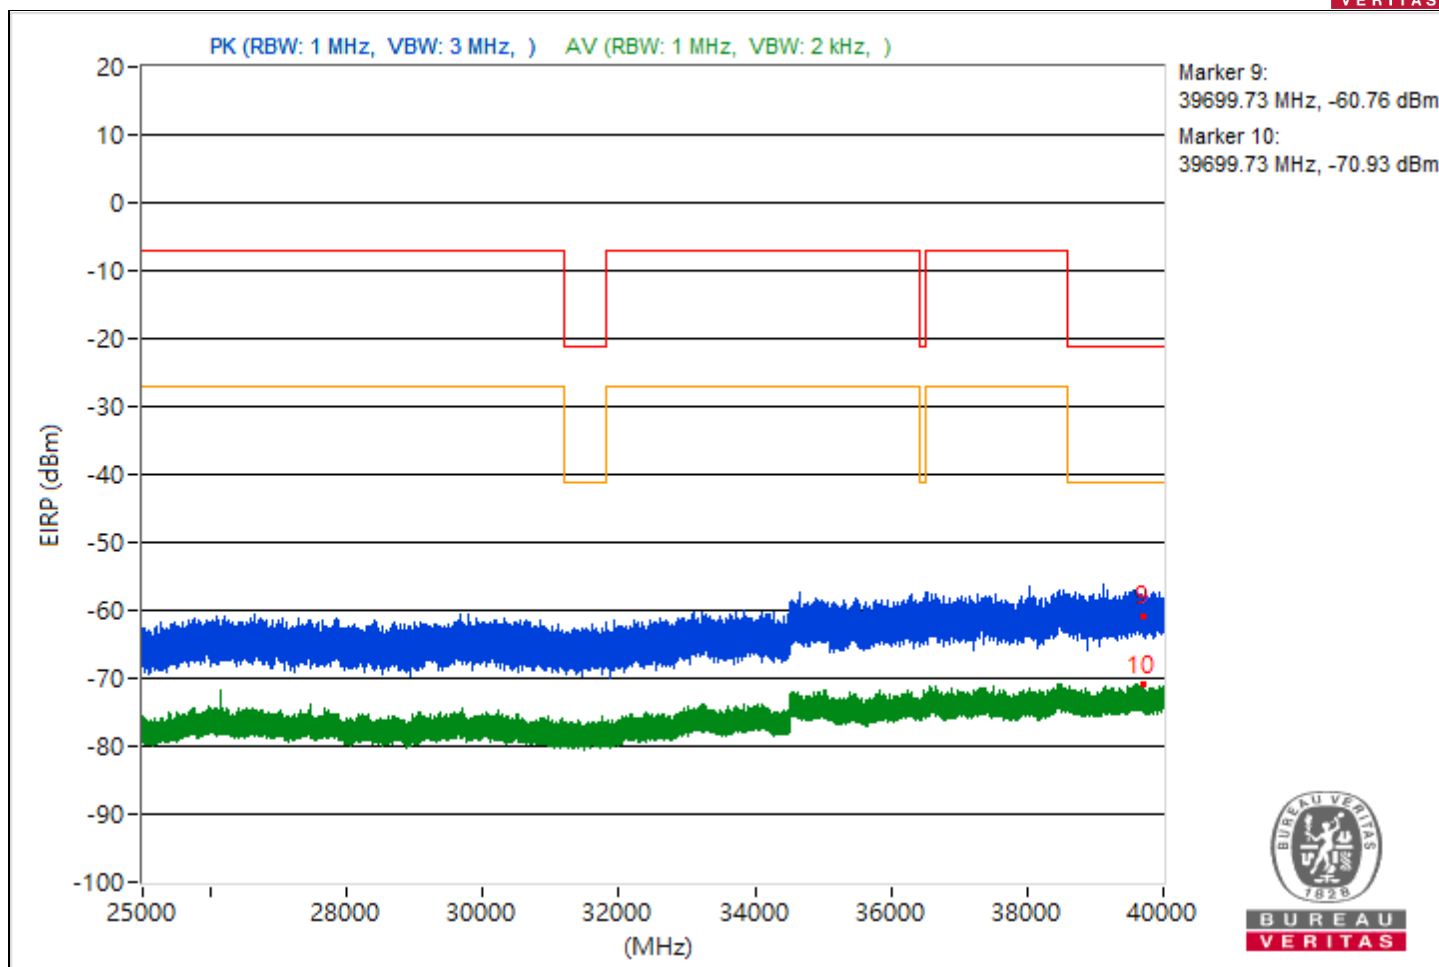


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.97	37.62 PK	74	-36.38	-70.02	-68.21	8.37	-57.64
2	5455.97	27.62 AV	54	-26.38	-77.6	-81.15	8.37	-67.64
3	9166.49	42.32 PK	74	-31.68	-62.33	-68.11	8.37	-52.94
4	9166.49	34.54 AV	54	-19.46	-69.57	-78.95	8.37	-60.72
5	19076.5	40.9 PK	74	-33.1	-66.77	-64.9	8.37	-54.36
6	19076.5	27.96 AV	54	-26.04	-77.28	-80.77	8.37	-67.3
7	23777.5	40.57 PK	74	-33.43	-67.42	-65.04	8.37	-54.69
8	23777.5	29.73 AV	54	-24.27	-75.58	-78.82	8.37	-65.53
9	39996.98	37.43 PK	74	-36.57	-71.23	-67.84	8.37	-57.83
10	39996.98	24.56 AV	54	-29.44	-80.87	-83.76	8.37	-70.7

Note: Margin value = Emission Level - Limit value

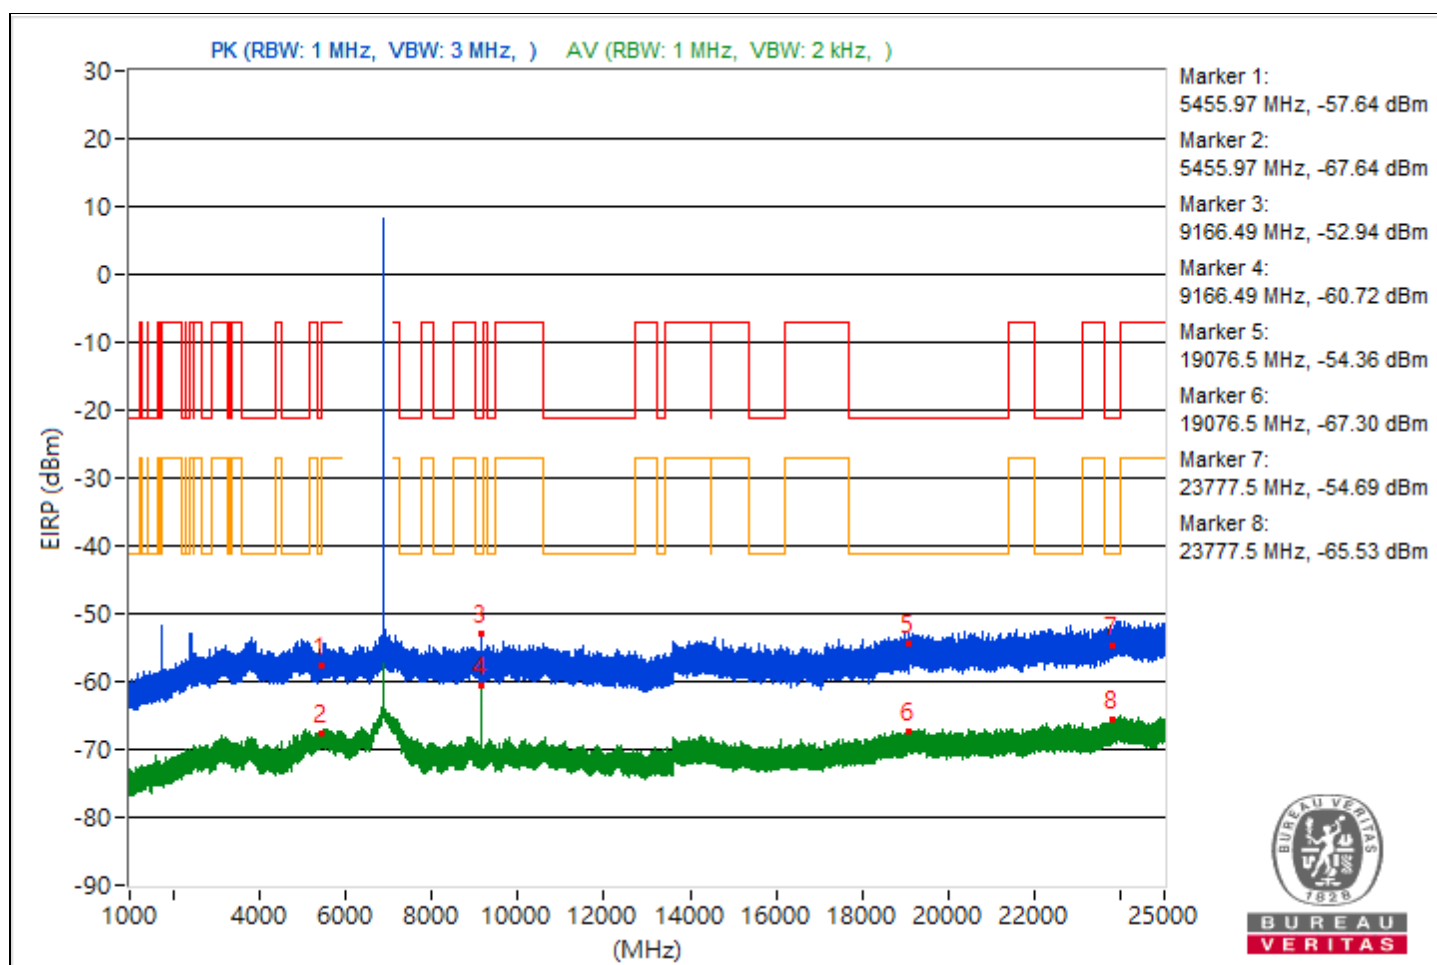


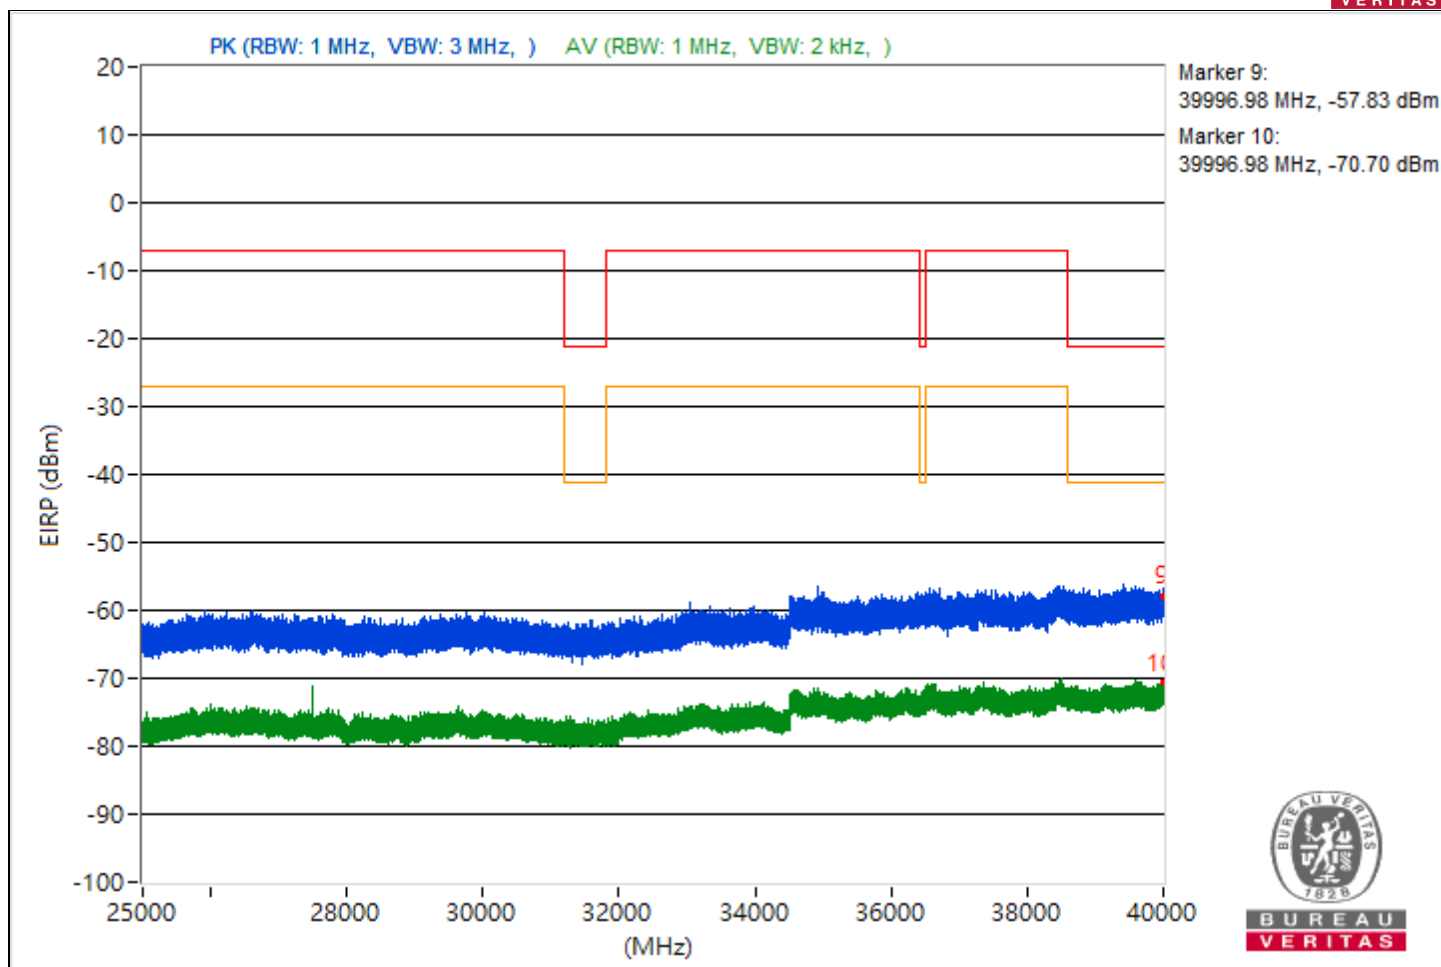


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.51	36.33 PK	74	-37.67	-69.34	-71.55	8.37	-58.93
2	5449.51	28.47 AV	54	-25.53	-77.48	-78.99	8.37	-66.79
3	9326.84	37.67 PK	74	-36.33	-67.85	-70.5	8.37	-57.59
4	9326.84	33.27 AV	54	-20.73	-71	-78.96	8.37	-61.99
5	21148.4	38.2 PK	74	-35.8	-67.43	-69.77	8.37	-57.06
6	21148.4	28.13 AV	54	-25.87	-80.87	-77	8.37	-67.13
7	24000	41.06 PK	74	-32.94	-65.47	-65.7	8.37	-54.2
8	24000	30.11 AV	54	-23.89	-77.4	-75.81	8.37	-65.15
9	39559.11	36.16 PK	74	-37.84	-70.81	-70.17	8.37	-59.1
10	39559.11	24.41 AV	54	-29.59	-84.06	-80.95	8.37	-70.85

Note: Margin value = Emission Level - Limit value

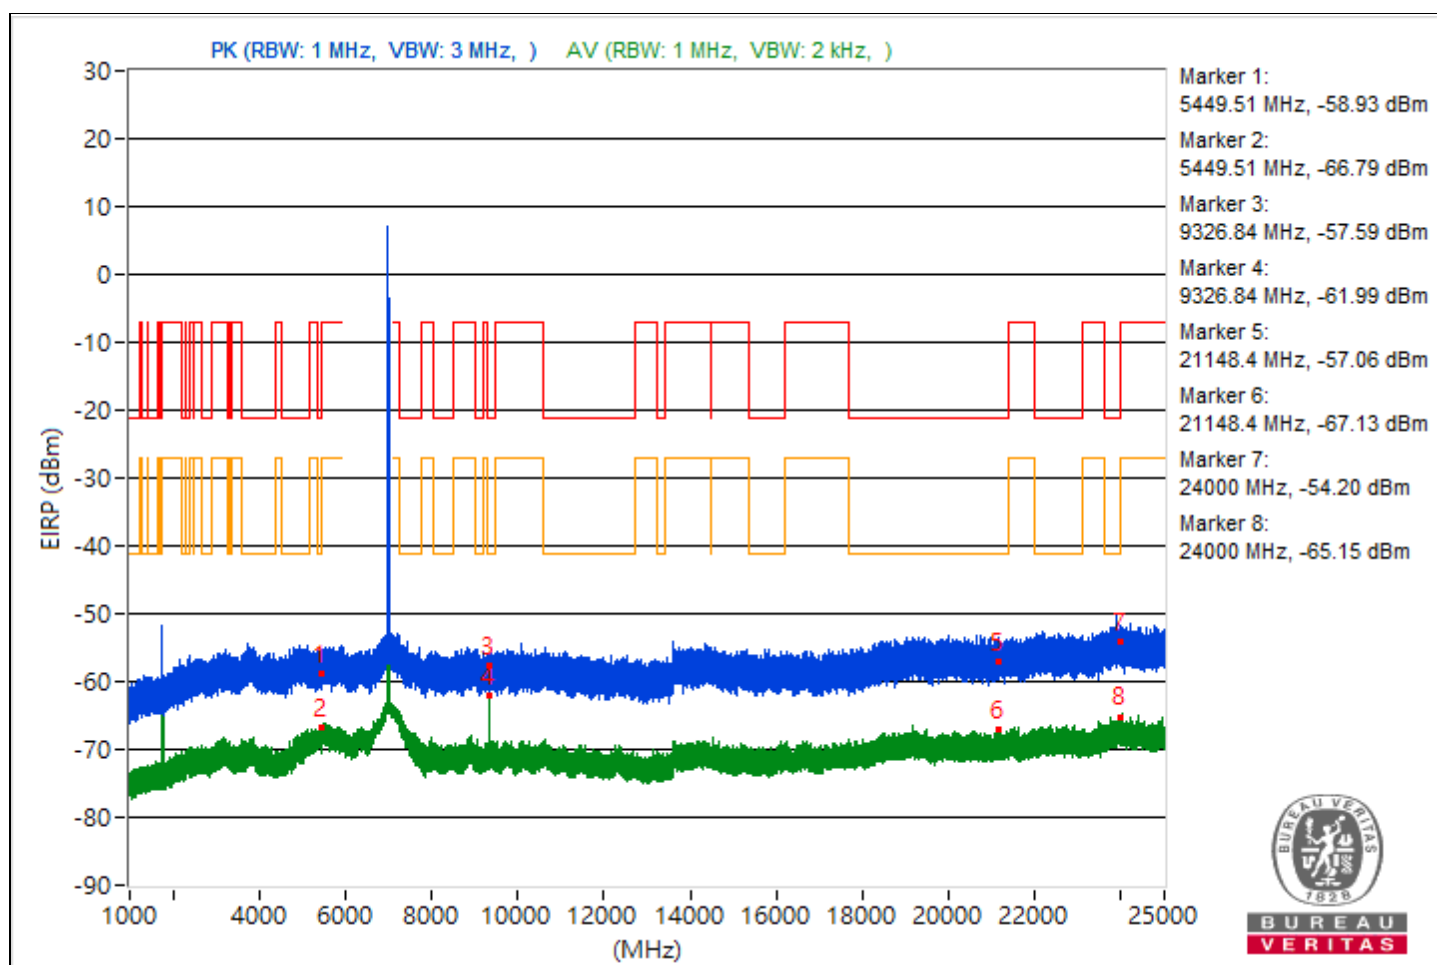


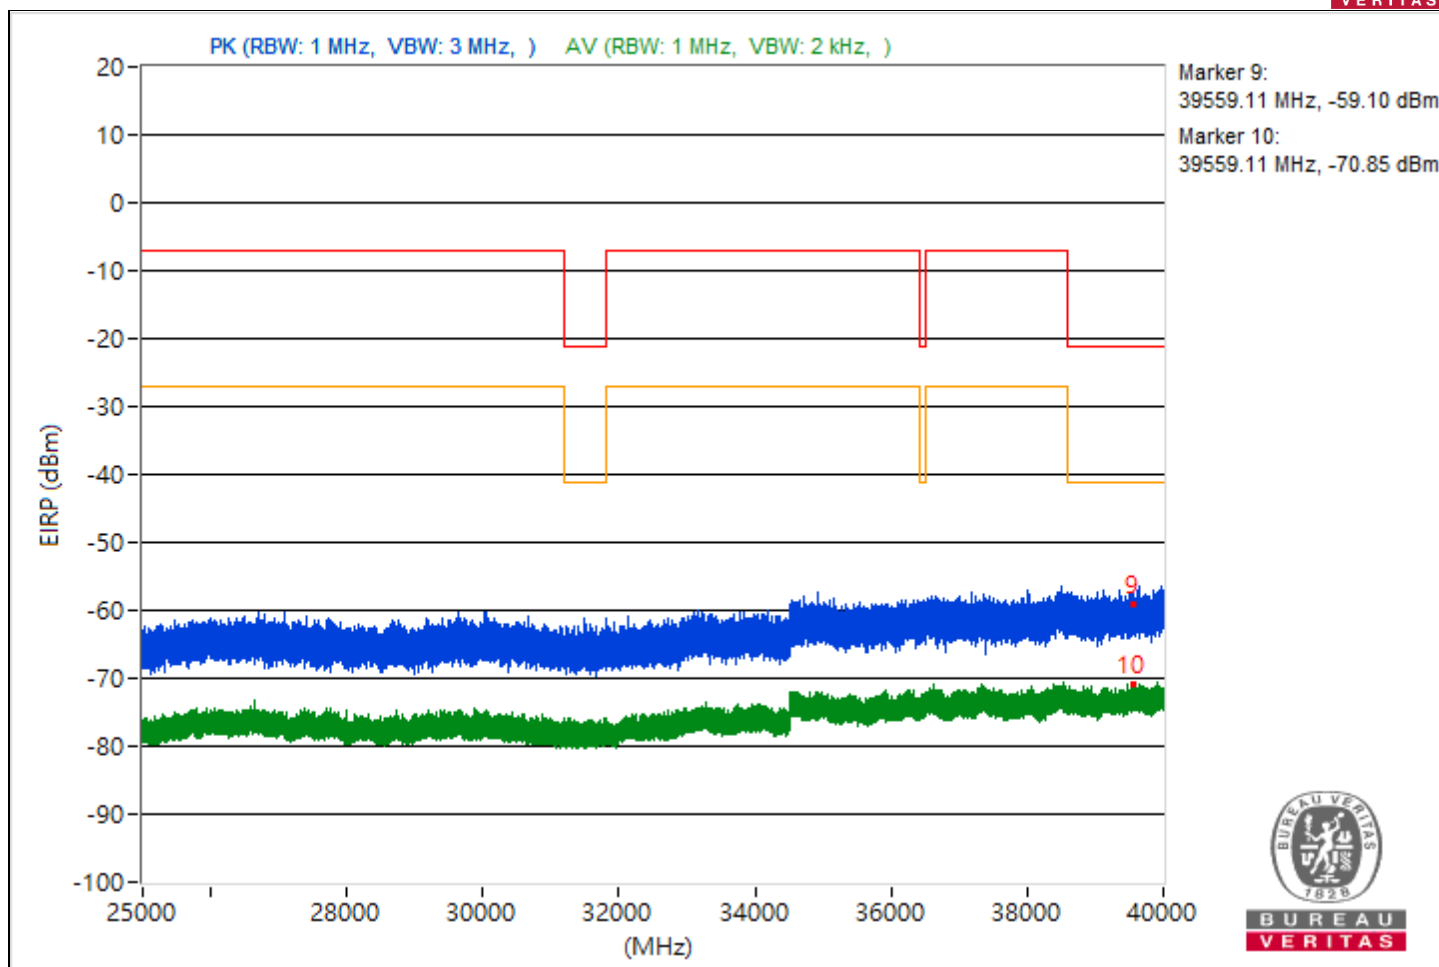


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5417.78	36.89 PK	74	-37.11	-70.46	-69.15	8.37	-58.37
2	5417.78	28.96 AV	54	-25.04	-78.25	-77.18	8.37	-66.3
3	7253.64	40.59 PK	74	-33.41	-65.92	-66.19	8.37	-54.67
4	7253.64	32.72 AV	54	-21.28	-73.59	-74.28	8.37	-62.54
5	21137.1	36.43 PK	74	-37.57	-69.74	-70.73	8.37	-58.83
6	21137.1	27.81 AV	54	-26.19	-77.08	-81.8	8.37	-67.45
7	23923.6	41.56 PK	74	-32.44	-66.37	-64.08	8.37	-53.7
8	23923.6	29.43 AV	54	-24.57	-75.65	-79.68	8.37	-65.83
9	39434.84	34.98 PK	74	-39.02	-72	-71.34	8.37	-60.28
10	39434.84	24.38 AV	54	-29.62	-82.47	-82.06	8.37	-70.88

Note: Margin value = Emission Level - Limit value

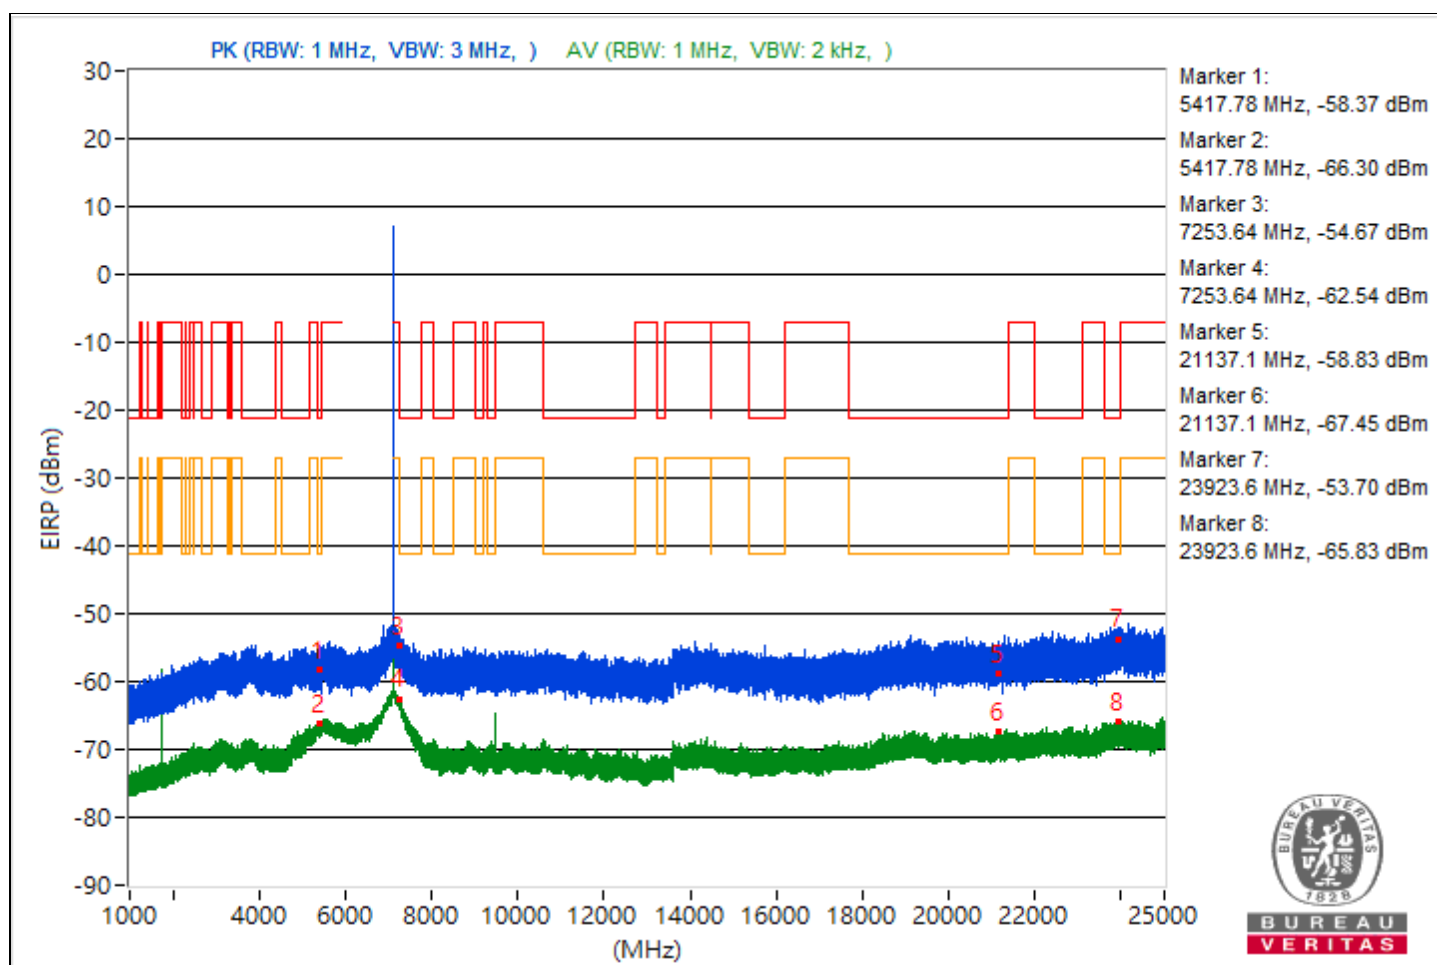

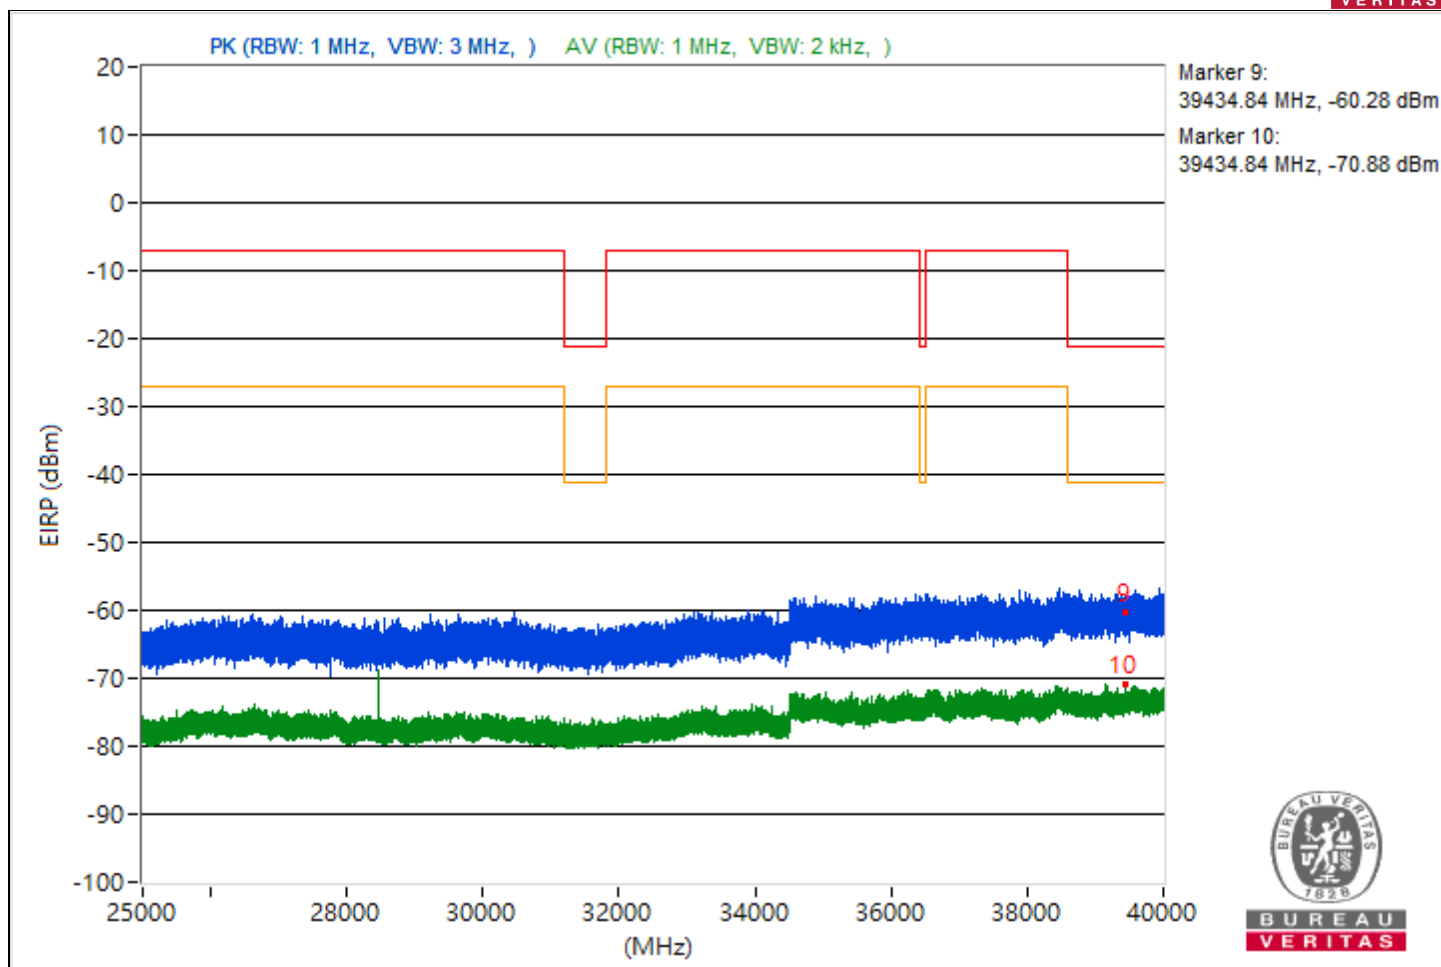



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.77	36.76 PK	74	-37.24	-69.22	-70.66	8.37	-58.5
2	5458.77	28.98 AV	54	-25.02	-76.95	-78.51	8.37	-66.28
3	#7940.03	44.74 PK	88.26	-43.52	-59.58	-67.23	8.37	-50.52
4	#7940.03	42.53 AV	68.26	-25.73	-61.21	-77.08	8.37	-52.73
5	19141.9	39.19 PK	74	-34.81	-67.97	-66.98	8.37	-56.07
6	19141.9	27.75 AV	54	-26.25	-81.12	-77.43	8.37	-67.51
7	23903.2	38.44 PK	74	-35.56	-71.09	-66.48	8.37	-56.82
8	23903.2	29.27 AV	54	-24.73	-75.61	-80.37	8.37	-65.99
9	39699.82	34.97 PK	74	-39.03	-71.1	-72.34	8.37	-60.29
10	39699.82	24.29 AV	54	-29.71	-80.55	-85.48	8.37	-70.97

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

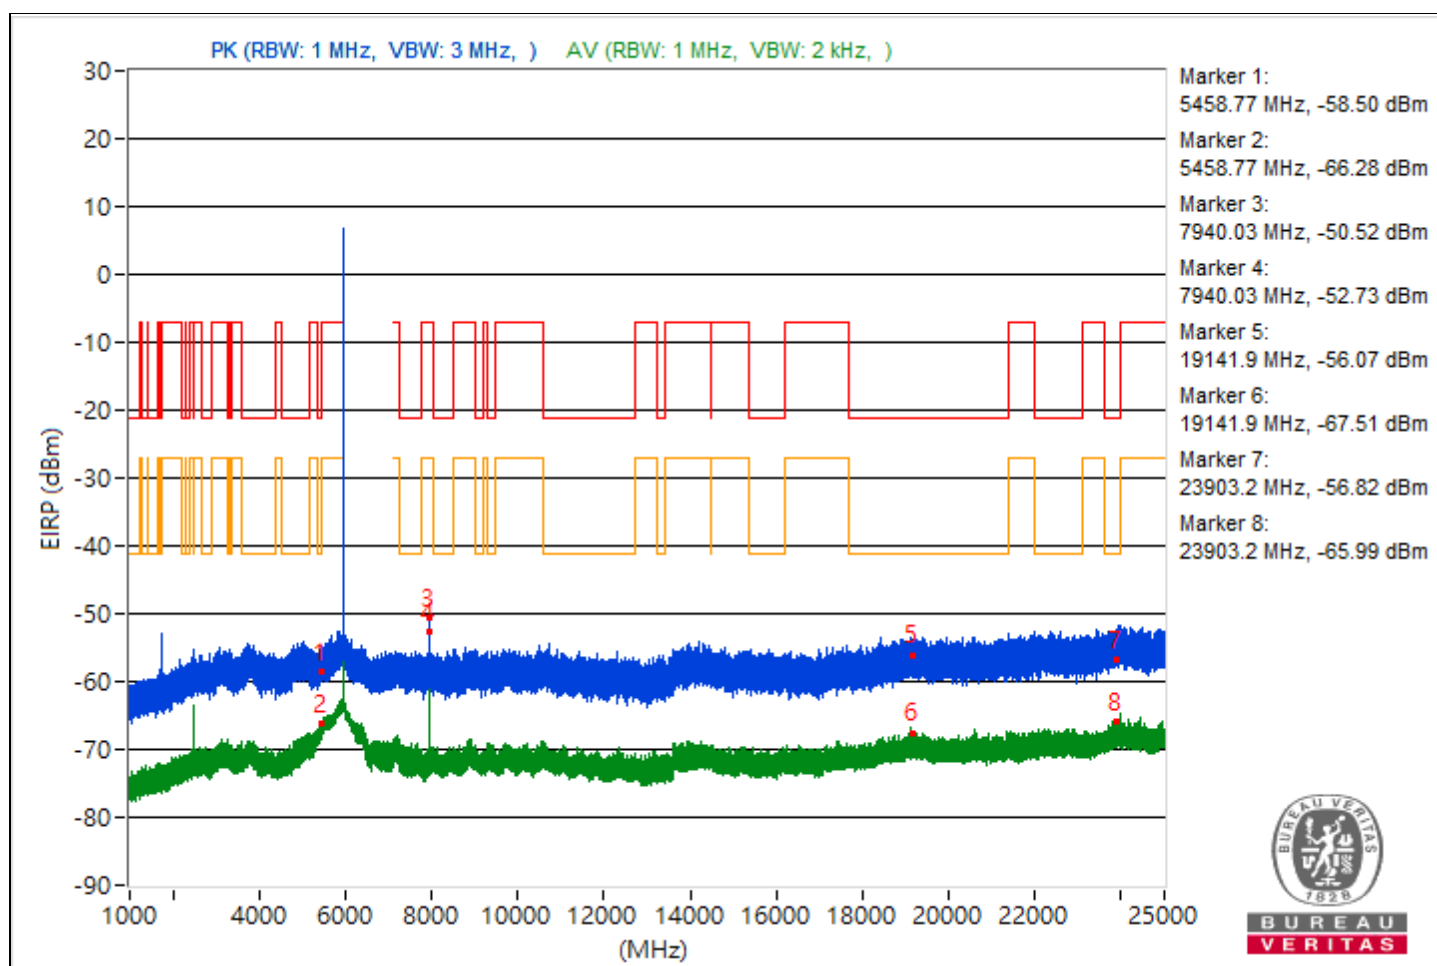


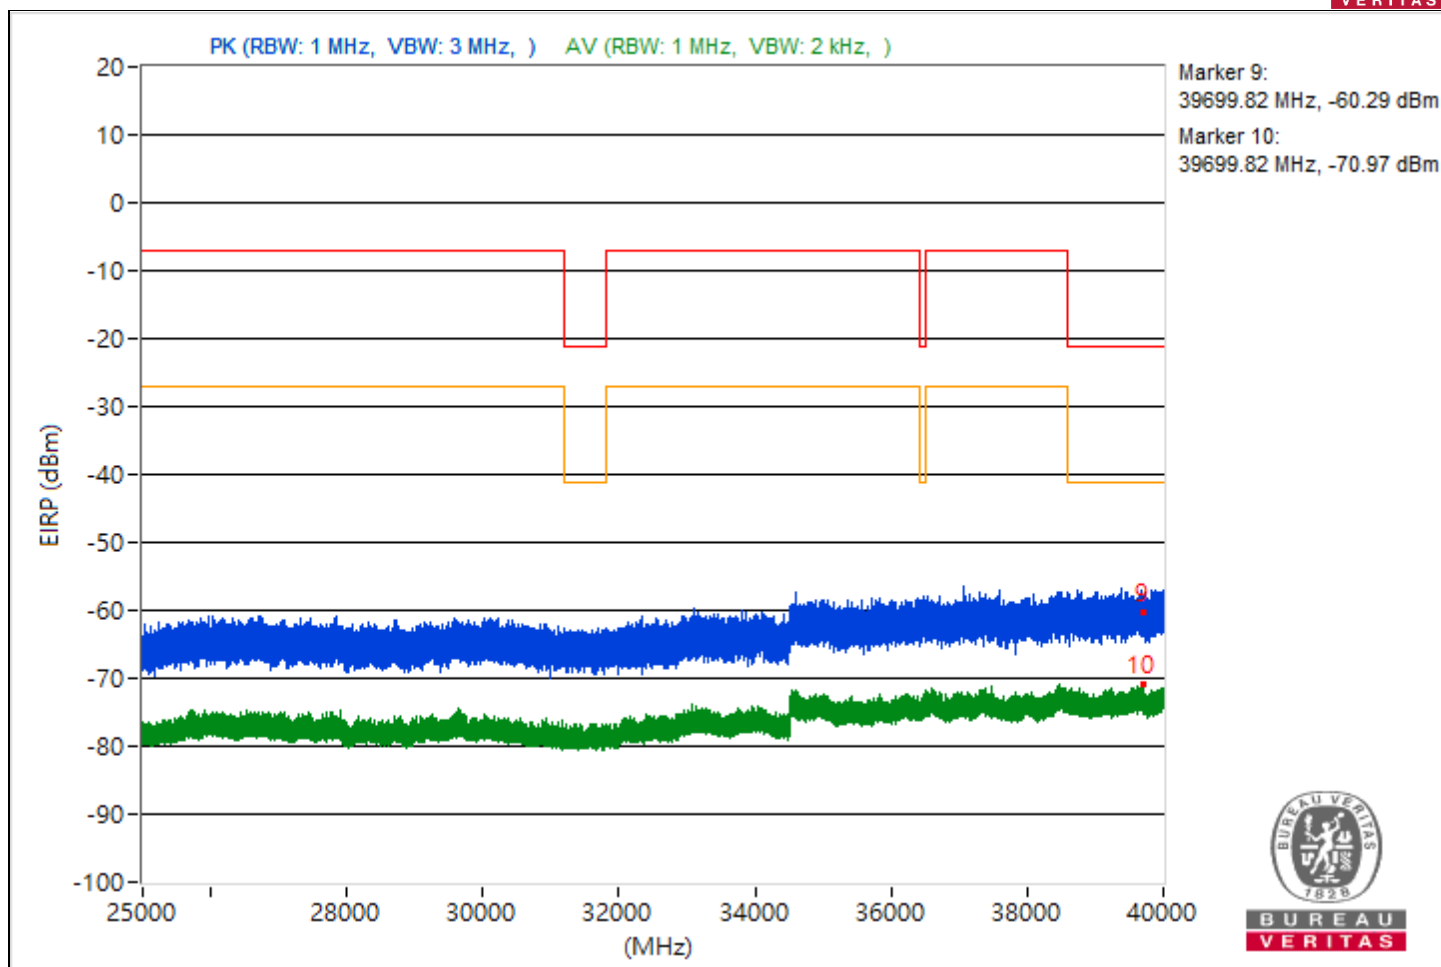


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5435.98	35.84 PK	74	-38.16	-70.65	-70.95	8.37	-59.42
2	5435.98	27.88 AV	54	-26.12	-77.54	-80.45	8.37	-67.38
3	7267.02	38.32 PK	74	-35.68	-69.69	-67.28	8.37	-56.94
4	7267.02	27.38 AV	54	-26.62	-78.01	-81.01	8.37	-67.88
5	19114.4	38.08 PK	74	-35.92	-68.19	-68.97	8.37	-57.18
6	19114.4	27.86 AV	54	-26.14	-77.11	-81.53	8.37	-67.4
7	23949.9	39.96 PK	74	-34.04	-66.41	-66.98	8.37	-55.3
8	23949.9	29.4 AV	54	-24.6	-79.21	-75.89	8.37	-65.86
9	39971.82	34.53 PK	74	-39.47	-70.67	-74.27	8.37	-60.73
10	39971.82	24.16 AV	54	-29.84	-84.53	-81.1	8.37	-71.1

Note: Margin value = Emission Level - Limit value

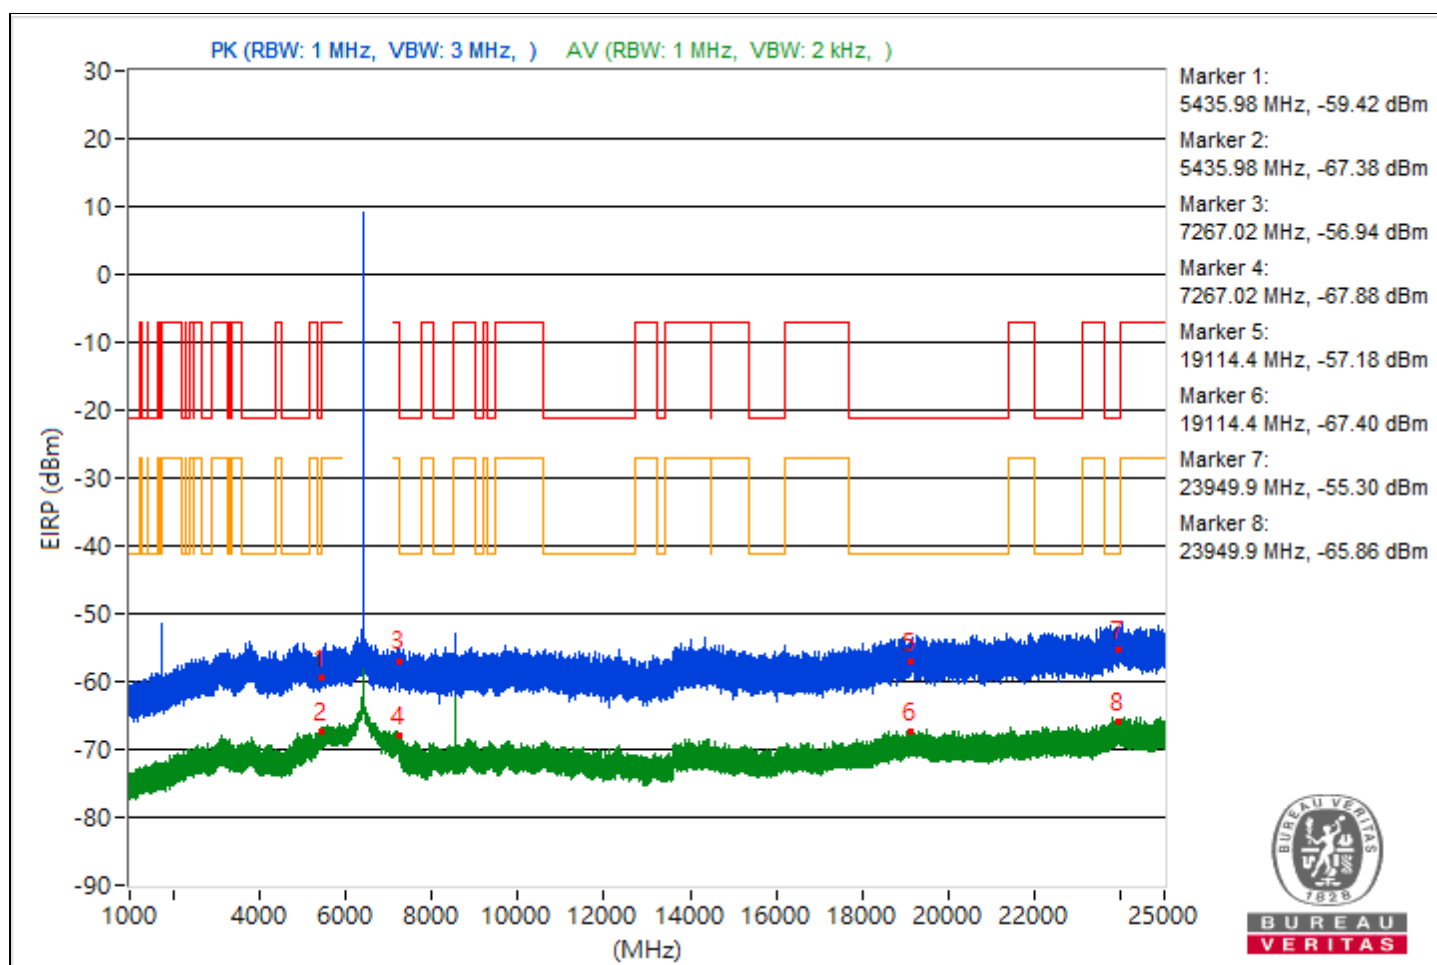


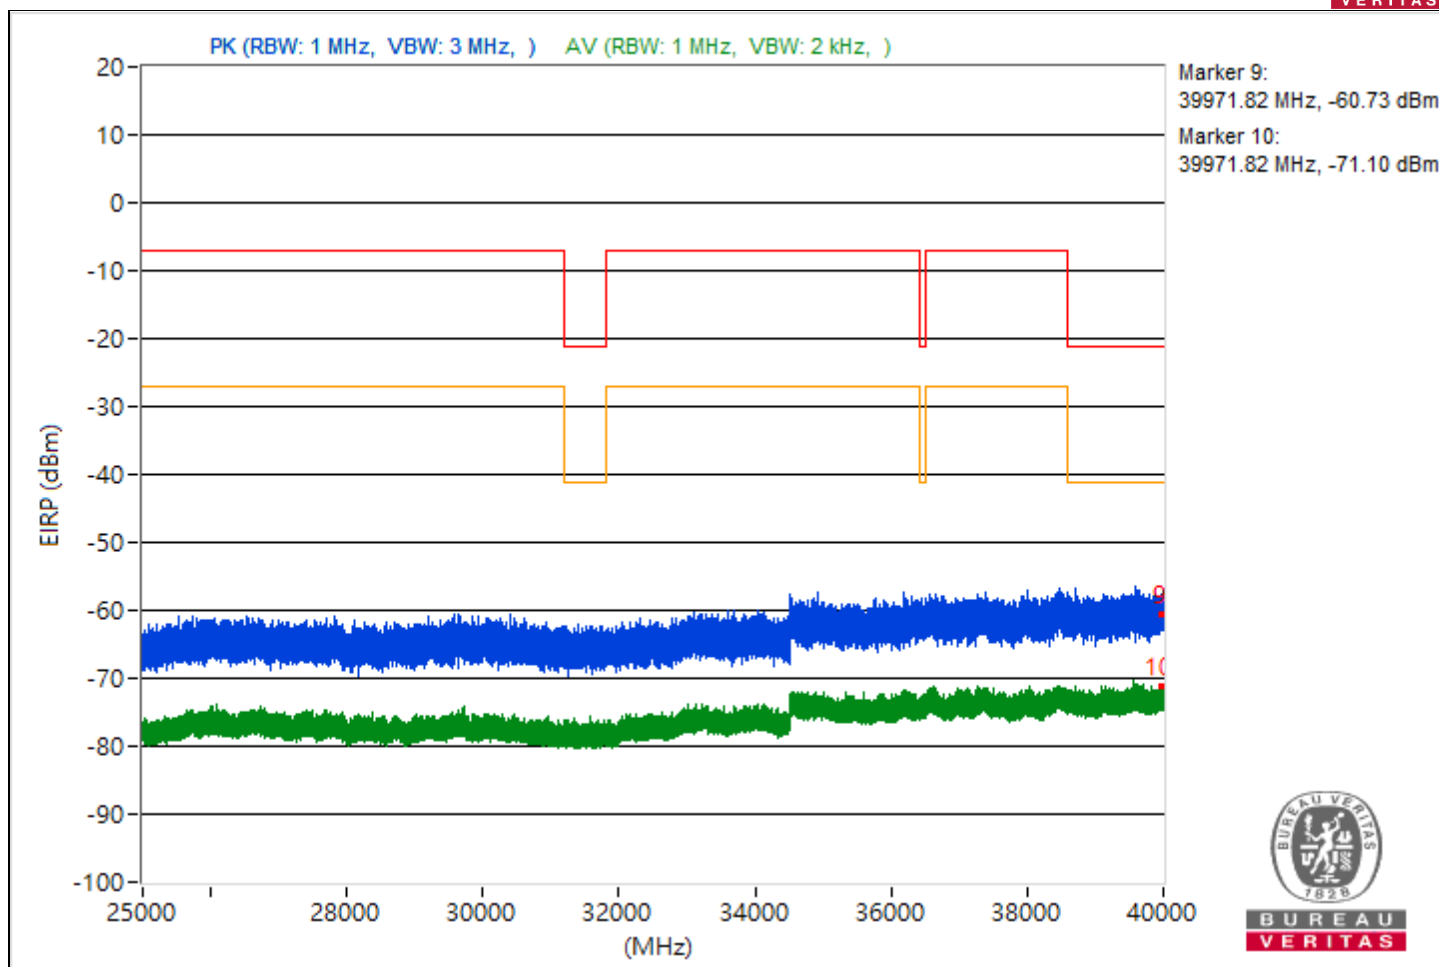


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.72	37.52 PK	74	-36.48	-69.3	-68.94	8.37	-57.74
2	5454.72	28.49 AV	54	-25.51	-78.12	-78.19	8.37	-66.77
3	7283.51	35.6 PK	74	-38.4	-71.68	-70.49	8.37	-59.66
4	7283.51	27.28 AV	54	-26.72	-78.46	-80.5	8.37	-67.98
5	19833.8	39.49 PK	74	-34.51	-66.24	-68.3	8.37	-55.77
6	19833.8	27.62 AV	54	-26.38	-77.14	-82.42	8.37	-67.64
7	23926.3	41.56 PK	74	-32.44	-65.85	-64.43	8.37	-53.7
8	23926.3	29.83 AV	54	-24.17	-78.37	-75.67	8.37	-65.43
9	39631.11	35.27 PK	74	-38.73	-70.55	-72.38	8.37	-59.99
10	39631.11	24.3 AV	54	-29.7	-83.73	-81.29	8.37	-70.96

Note: Margin value = Emission Level - Limit value

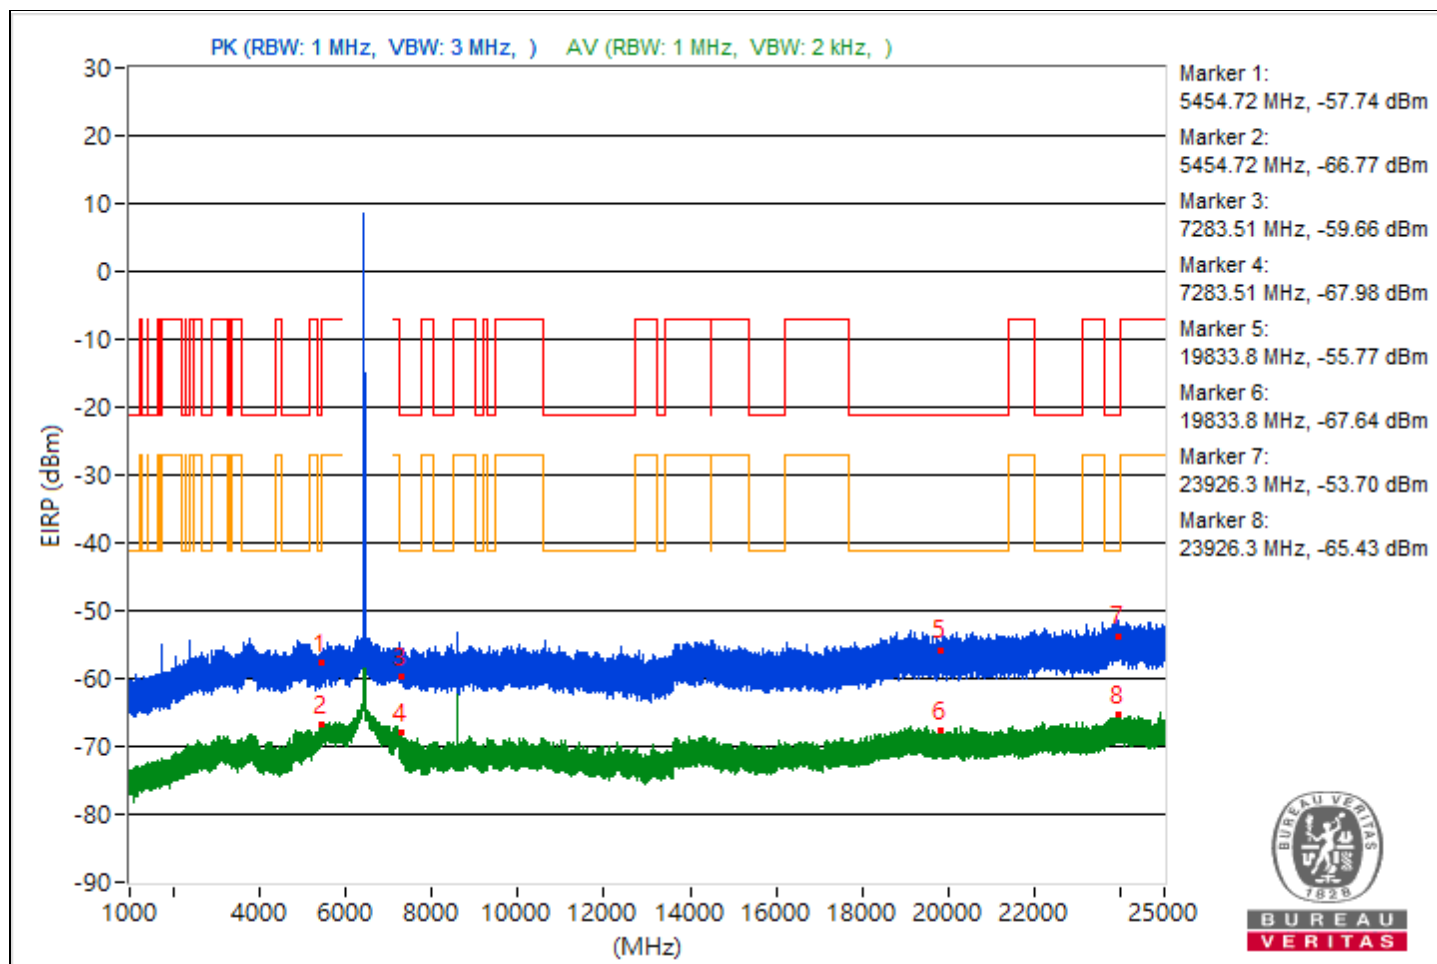


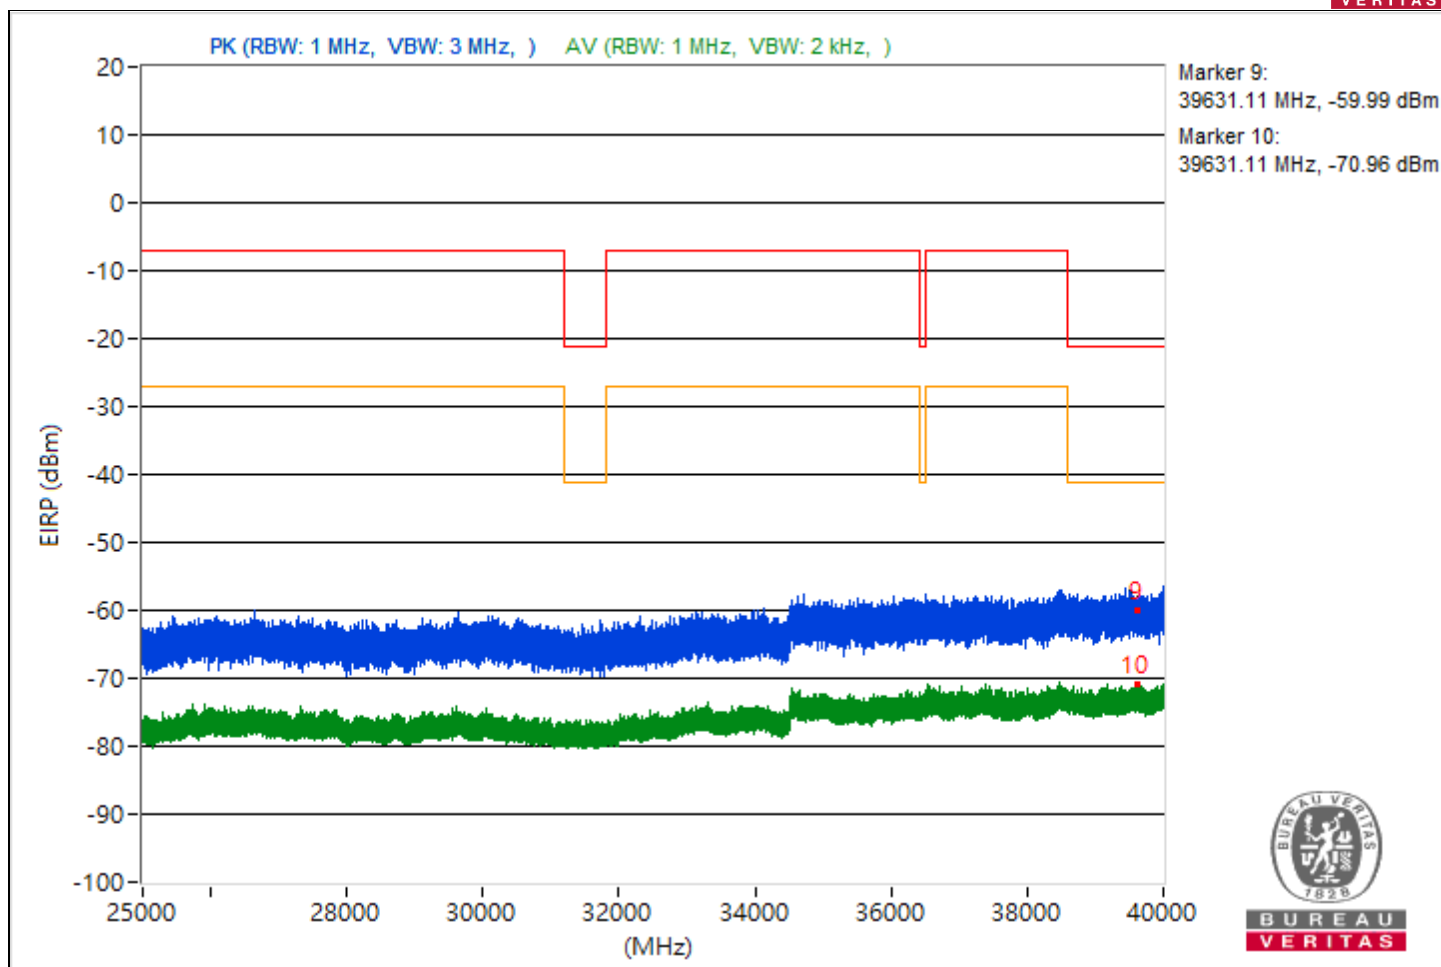


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5419.72	35.6 PK	74	-38.4	-70.42	-71.75	8.37	-59.66
2	5419.72	28.17 AV	54	-25.83	-77.3	-80.07	8.37	-67.09
3	7252.32	37.35 PK	74	-36.65	-68.77	-69.89	8.37	-57.91
4	7252.32	27.5 AV	54	-26.5	-80.13	-78.33	8.37	-67.76
5	19356.2	37.45 PK	74	-36.55	-69.36	-69.02	8.37	-57.81
6	19356.2	27.84 AV	54	-26.16	-77.12	-81.59	8.37	-67.42
7	23925.1	41.15 PK	74	-32.85	-65.92	-65.09	8.37	-54.11
8	23925.1	29.58 AV	54	-24.42	-75.84	-78.77	8.37	-65.68
9	39122.67	34.92 PK	74	-39.08	-72.44	-71.1	8.37	-60.34
10	39122.67	24.19 AV	54	-29.81	-81.07	-84.48	8.37	-71.07

Note: Margin value = Emission Level - Limit value

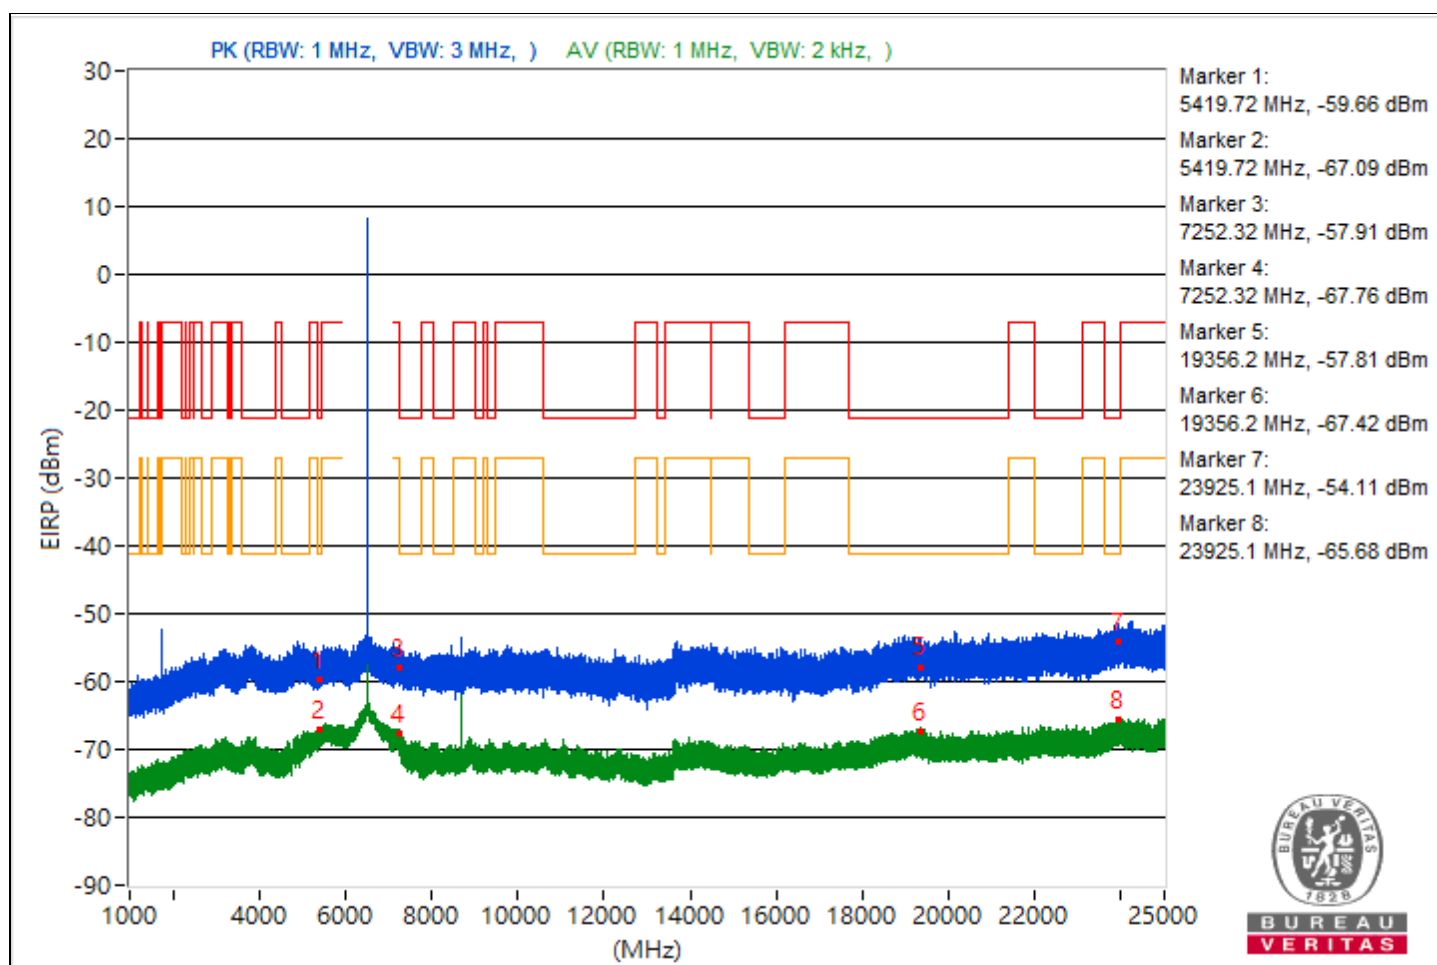


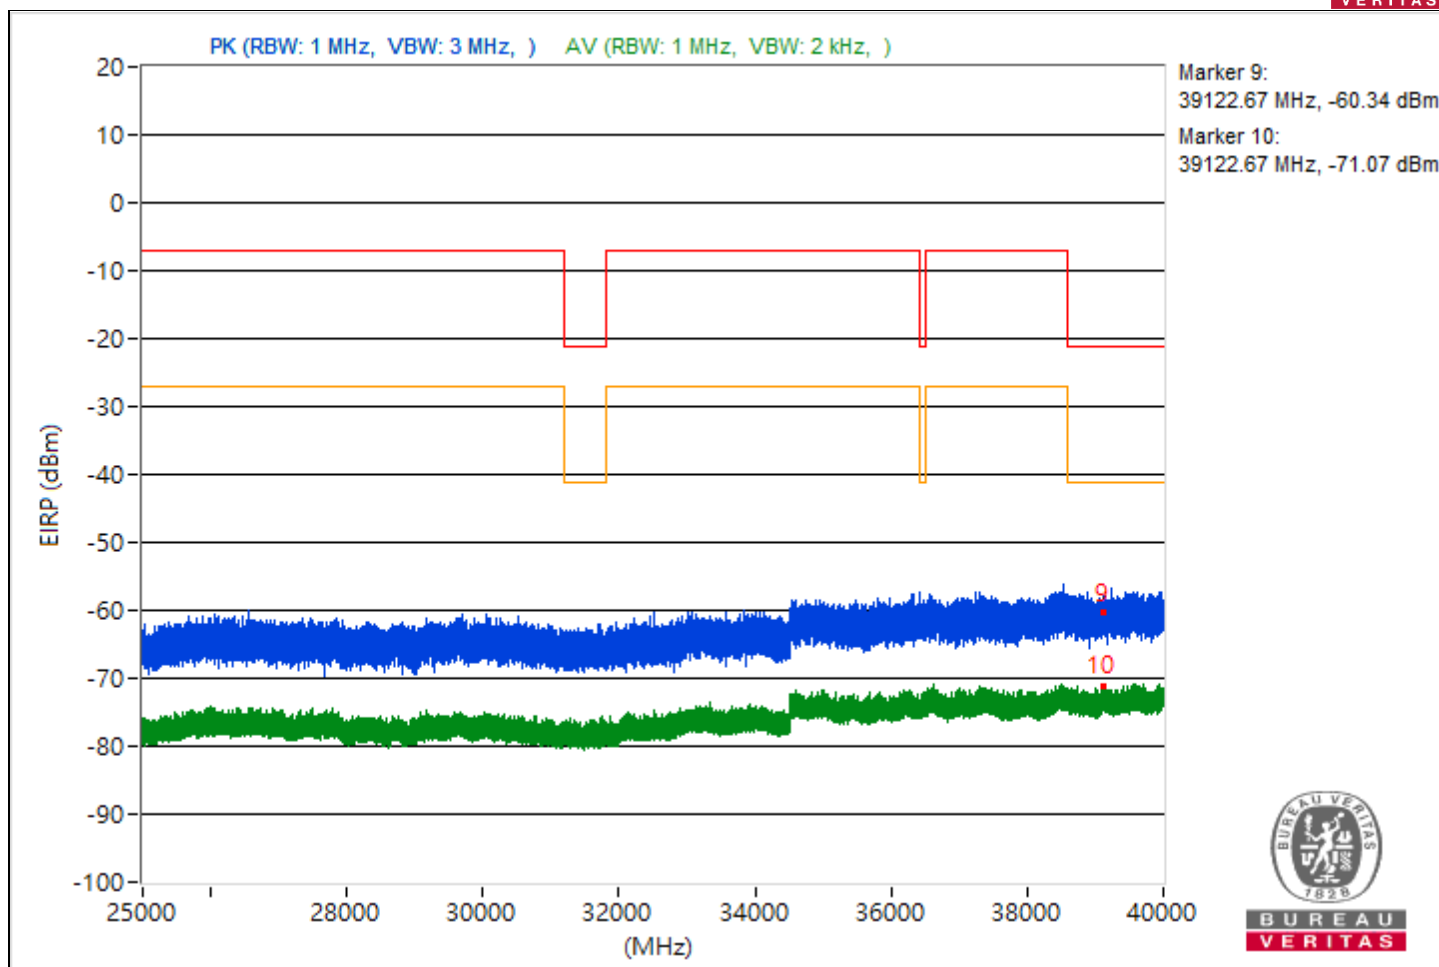


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.69	35.82 PK	74	-38.18	-70.57	-71.09	8.37	-59.44
2	5458.69	28.2 AV	54	-25.8	-77.4	-79.82	8.37	-67.06
3	7256.13	36.49 PK	74	-37.51	-71.25	-69.27	8.37	-58.77
4	7256.13	28.09 AV	54	-25.91	-79.13	-78.03	8.37	-67.17
5	20481.6	38.93 PK	74	-35.07	-67.25	-68.23	8.37	-56.33
6	20481.6	28 AV	54	-26	-76.86	-81.73	8.37	-67.26
7	23915.5	41.56 PK	74	-32.44	-64.93	-65.23	8.37	-53.7
8	23915.5	29.44 AV	54	-24.56	-79.07	-75.9	8.37	-65.82
9	39973.24	33.78 PK	74	-40.22	-71.39	-75.1	8.37	-61.48
10	39973.24	24.01 AV	54	-29.99	-81.34	-84.47	8.37	-71.25

Note: Margin value = Emission Level - Limit value

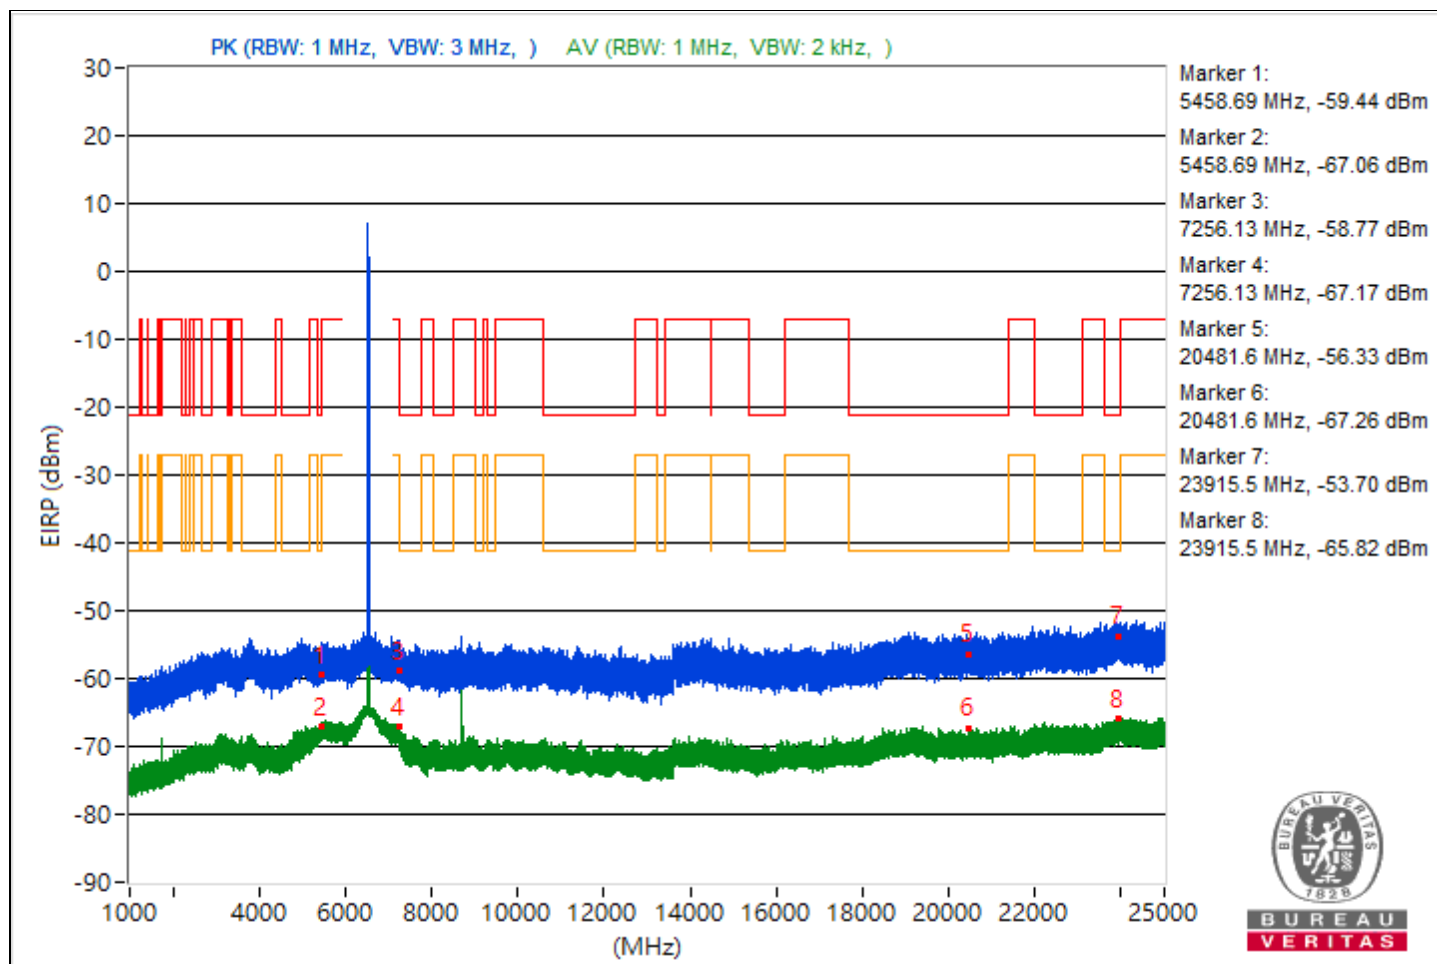


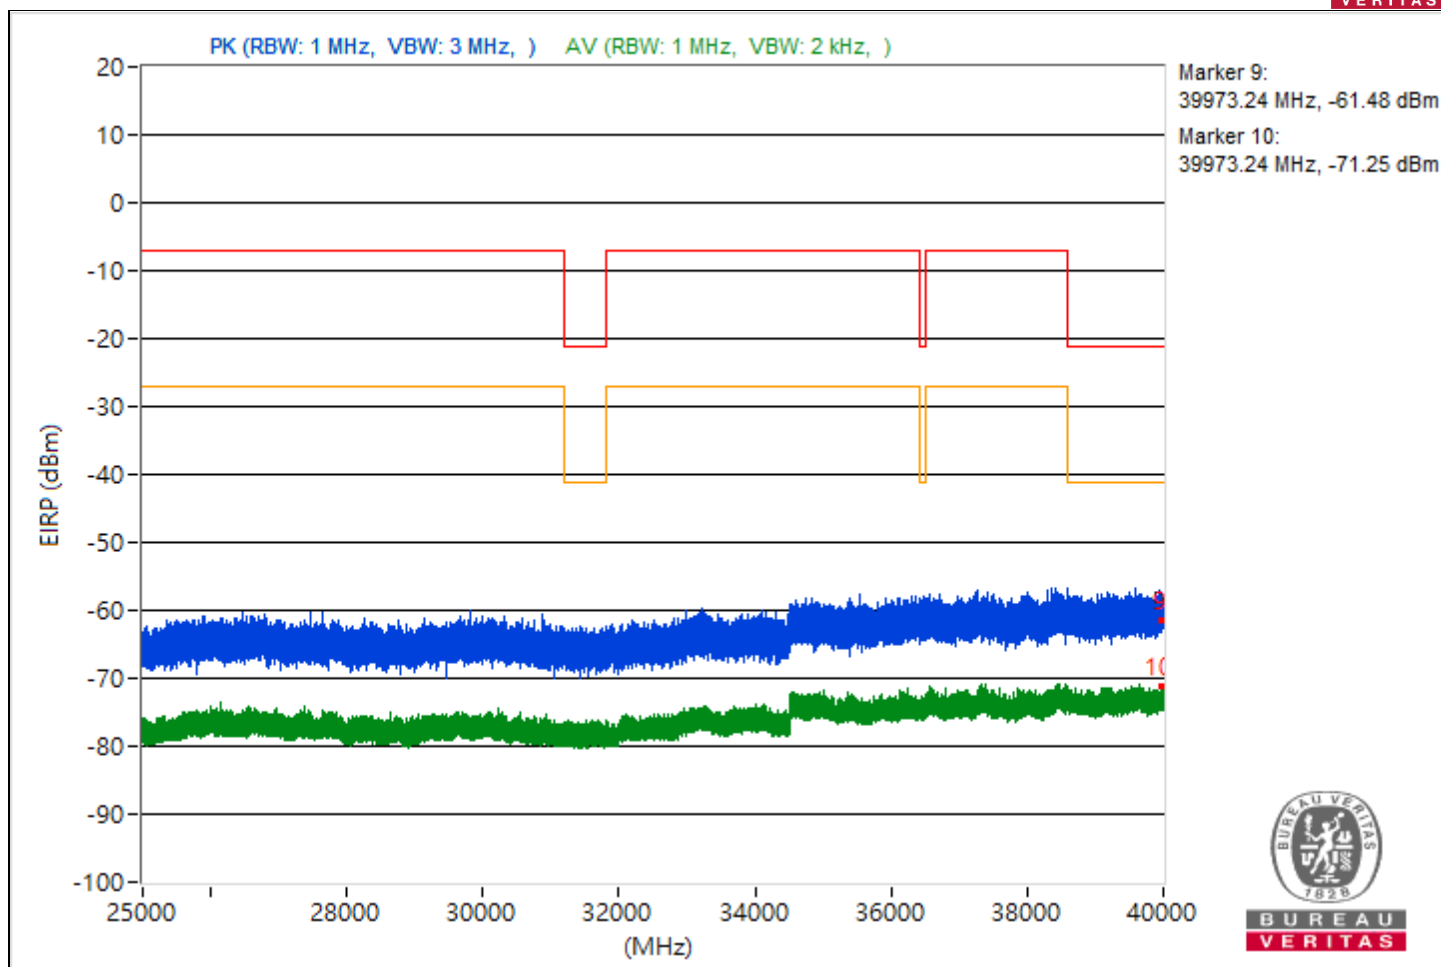


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.78	36.54 PK	74	-37.46	-69.56	-70.73	8.37	-58.72
2	5459.78	28.33 AV	54	-25.67	-77.42	-79.43	8.37	-66.93
3	9166.67	41.74 PK	74	-32.26	-62.68	-69.65	8.37	-53.52
4	9166.67	34.61 AV	54	-19.39	-69.53	-78.56	8.37	-60.65
5	19473.4	39.47 PK	74	-34.53	-65.12	-71.16	8.37	-55.79
6	19473.4	27.61 AV	54	-26.39	-77.79	-80.79	8.37	-67.65
7	23939.9	41.2 PK	74	-32.8	-64.46	-66.71	8.37	-54.06
8	23939.9	29.68 AV	54	-24.32	-75.23	-79.88	8.37	-65.58
9	38641.07	34.77 PK	74	-39.23	-72.46	-71.35	8.37	-60.49
10	38641.07	24.1 AV	54	-29.9	-85.3	-80.87	8.37	-71.16

Note: Margin value = Emission Level - Limit value

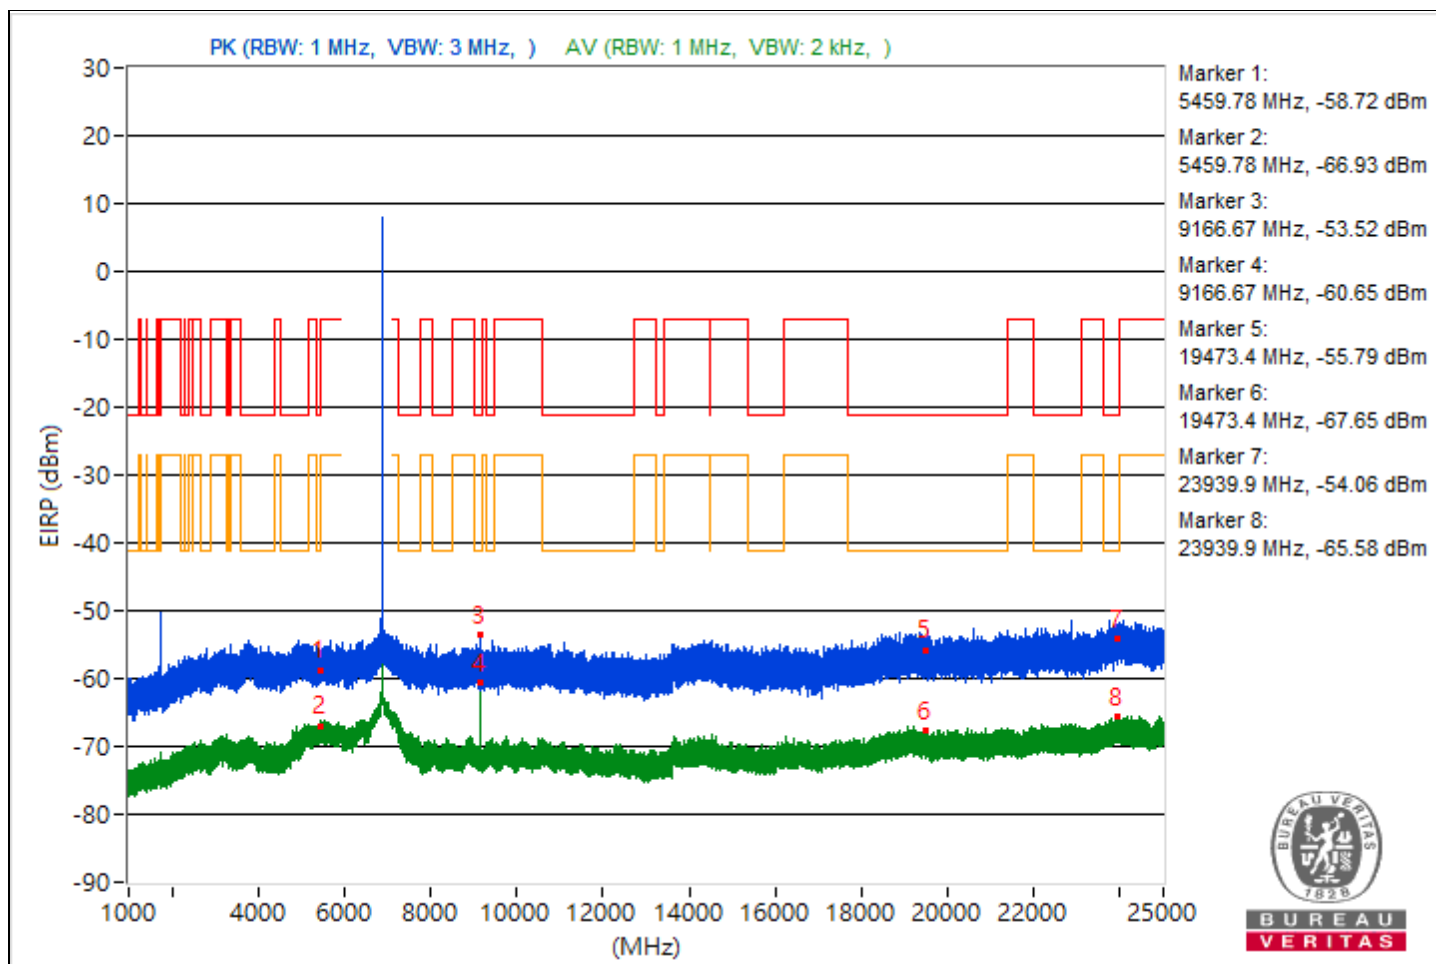


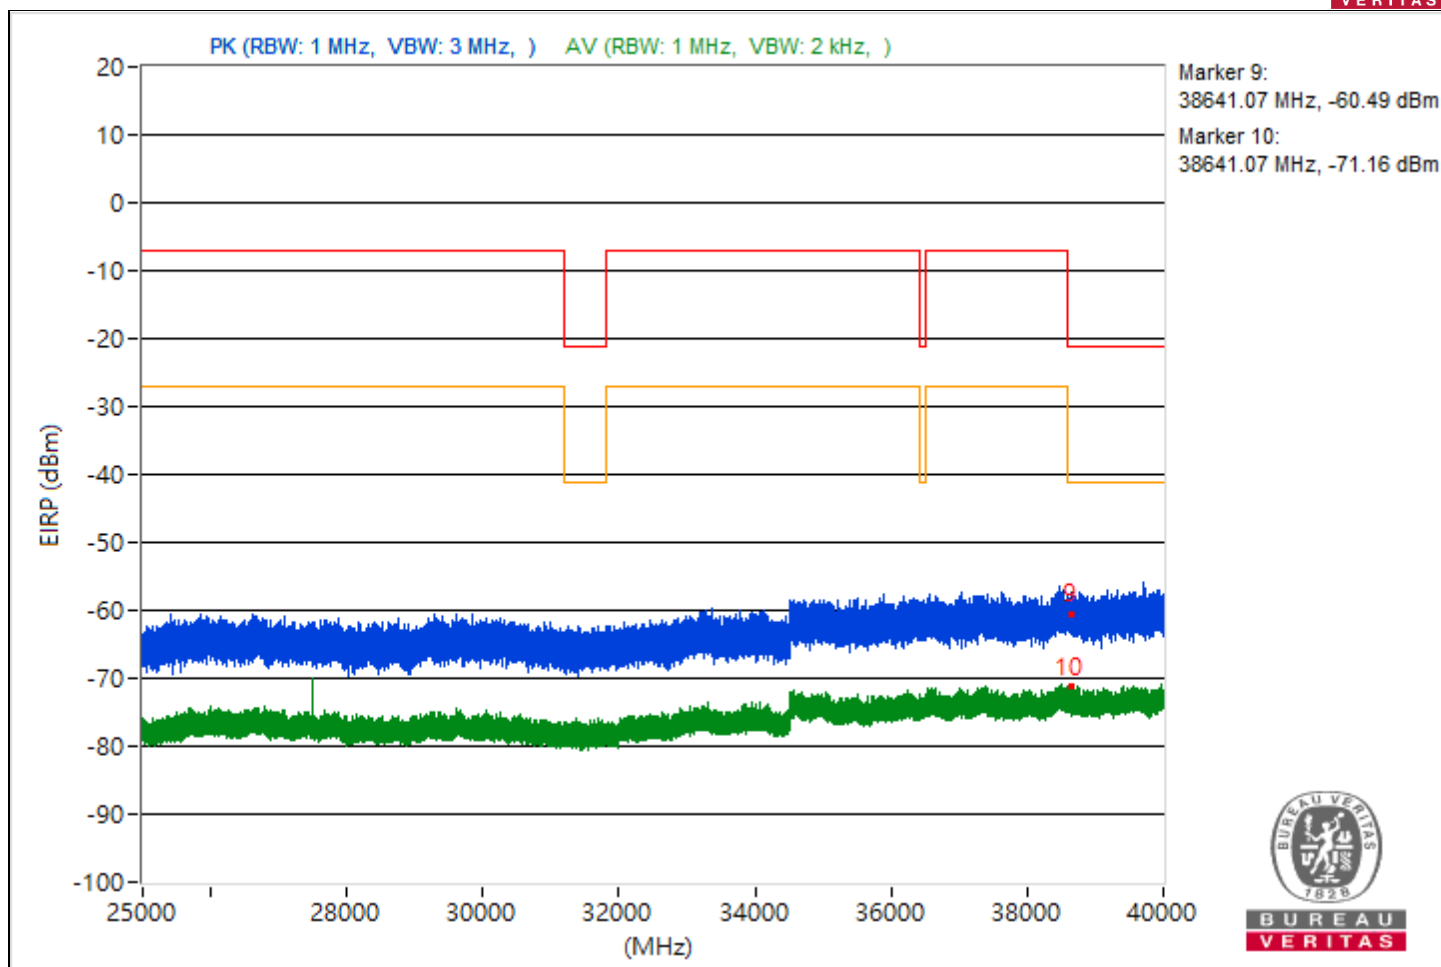

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5426.18	36.89 PK	74	-37.11	-69.61	-69.9	8.37	-58.37
2	5426.18	28.48 AV	54	-25.52	-79.03	-77.43	8.37	-66.78
3	9140.27	42.72 PK	74	-31.28	-61.35	-71.02	8.37	-52.54
4	9140.27	33.91 AV	54	-20.09	-70.15	-80.03	8.37	-61.35
5	19298.9	39.14 PK	74	-34.86	-69.3	-66.24	8.37	-56.12
6	19298.9	27.85 AV	54	-26.15	-77.42	-80.81	8.37	-67.41
7	23898.2	41.89 PK	74	-32.11	-65.61	-64.03	8.37	-53.37
8	23898.2	29.61 AV	54	-24.39	-75.09	-80.64	8.37	-65.65
9	39614.84	34.96 PK	74	-39.04	-70.92	-72.6	8.37	-60.3
10	39614.84	23.64 AV	54	-30.36	-85.73	-81.33	8.37	-71.62

Note: Margin value = Emission Level - Limit value

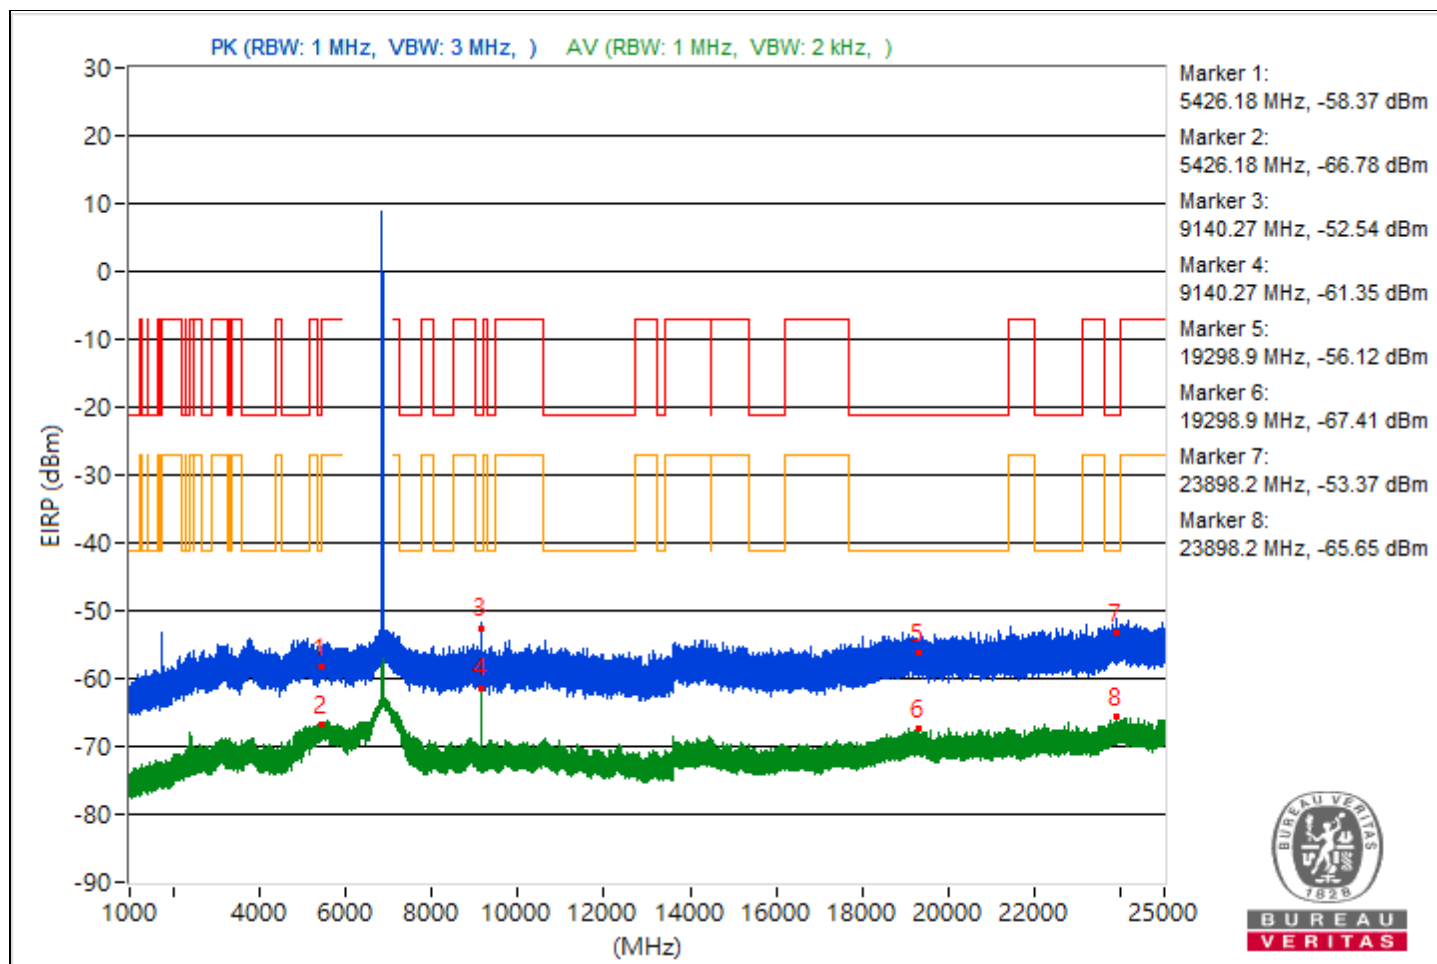





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.49	37.86 PK	74	-36.14	-67.32	-70.97	8.37	-57.4
2	5454.49	28.83 AV	54	-25.17	-76.96	-78.87	8.37	-66.43
3	9486.49	39.54 PK	74	-34.46	-64.97	-71.49	8.37	-55.72
4	9486.49	31.29 AV	54	-22.71	-73.06	-80.51	8.37	-63.97
5	19175.2	38.33 PK	74	-35.67	-68.09	-68.55	8.37	-56.93
6	19175.2	27.94 AV	54	-26.06	-77.02	-81.47	8.37	-67.32
7	23943.1	42.61 PK	74	-31.39	-66.48	-62.47	8.37	-52.65
8	23943.1	29.52 AV	54	-24.48	-75.94	-78.77	8.37	-65.74
9	39593.51	34.88 PK	74	-39.12	-71.74	-71.77	8.37	-60.38
10	39593.51	24.46 AV	54	-29.54	-80.61	-84.68	8.37	-70.8

Note: Margin value = Emission Level - Limit value

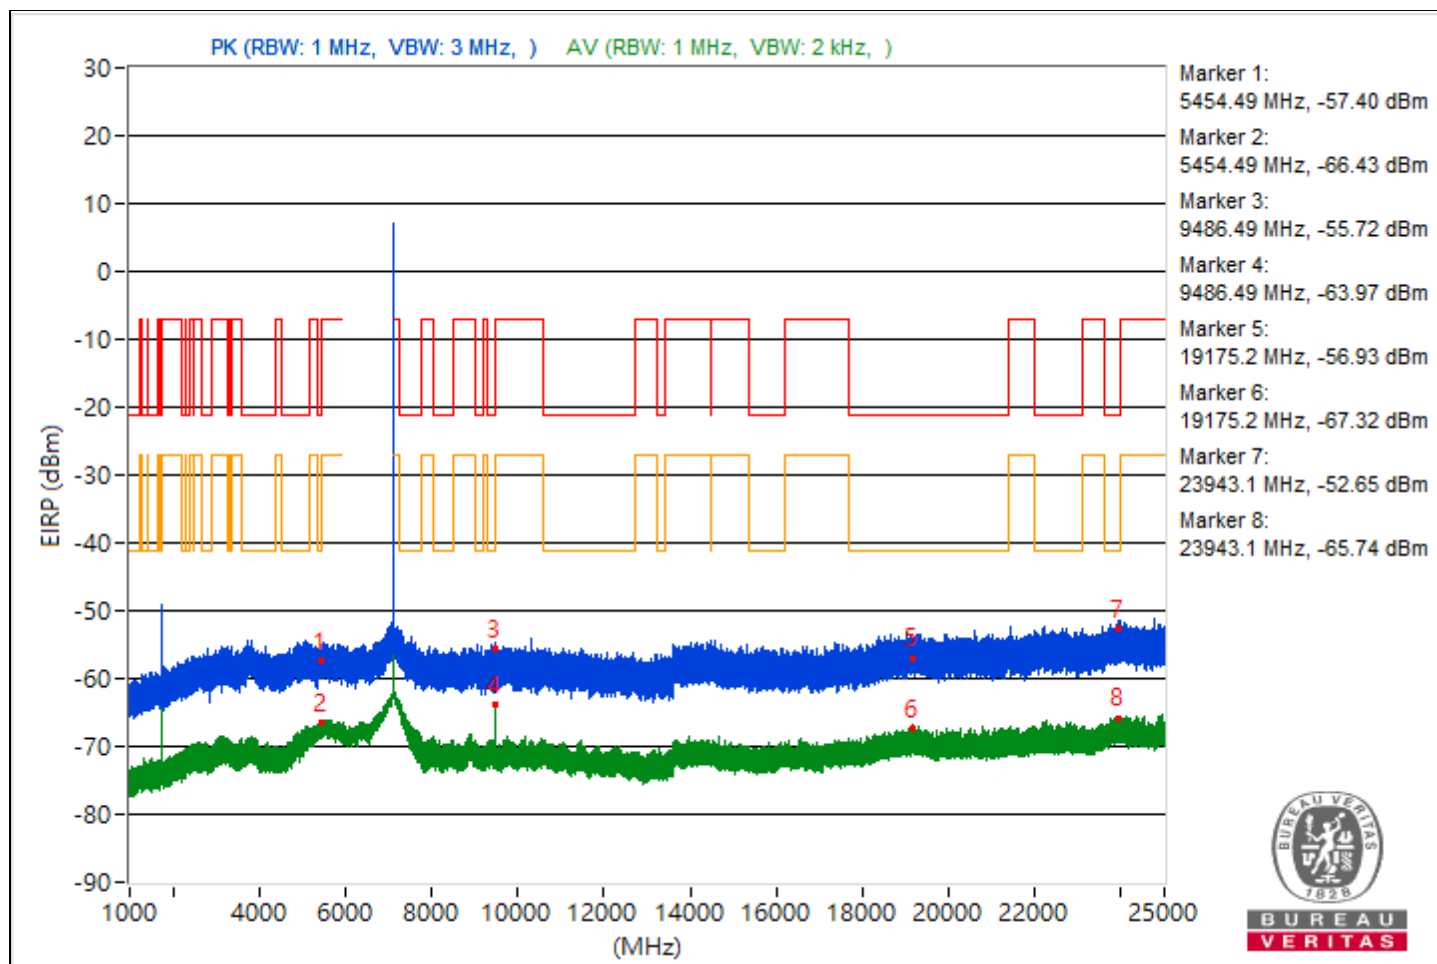

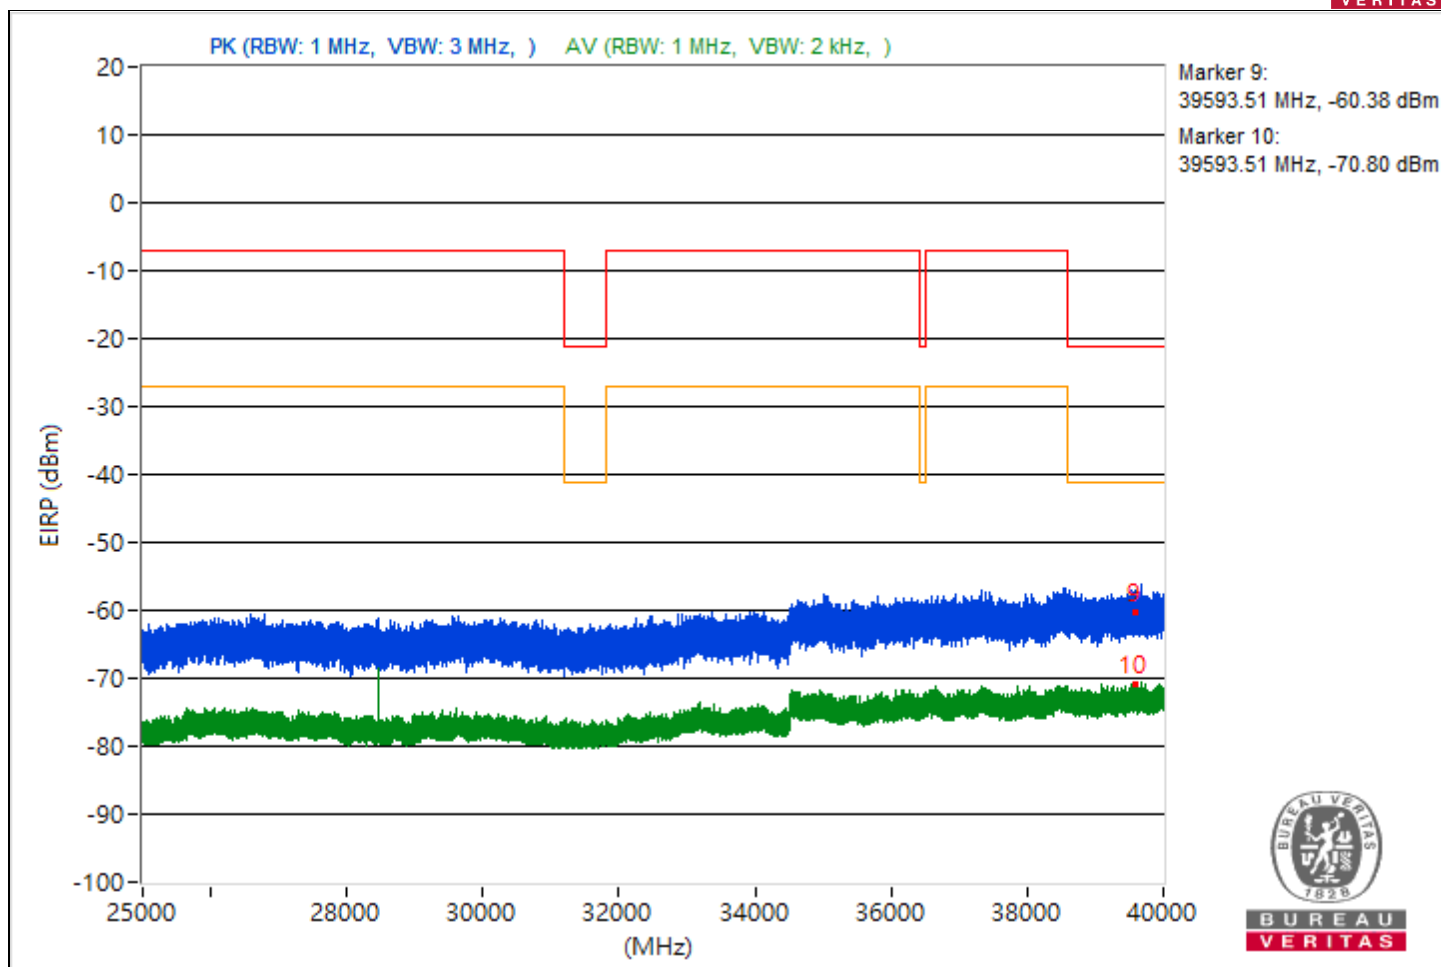



RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.83	36.99 PK	74	-37.01	-70.13	-69.22	8.37	-58.27
2	5457.83	29.2 AV	54	-24.8	-77.24	-77.65	8.37	-66.06
3	#7940.03	44.24 PK	88.26	-44.02	-59.96	-68.5	8.37	-51.02
4	#7940.03	42.2 AV	68.26	-26.06	-61.52	-78.34	8.37	-53.06
5	19171.8	38.87 PK	74	-35.13	-66.58	-69.42	8.37	-56.39
6	19171.8	28.21 AV	54	-25.79	-77.41	-79.77	8.37	-67.05
7	23909.2	40.43 PK	74	-33.57	-65.92	-66.53	8.37	-54.83
8	23909.2	29.55 AV	54	-24.45	-75.67	-79.21	8.37	-65.71
9	39699.56	36.73 PK	74	-37.27	-70.62	-69.31	8.37	-58.53
10	39699.56	24.94 AV	54	-29.06	-80.89	-82.71	8.37	-70.32

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

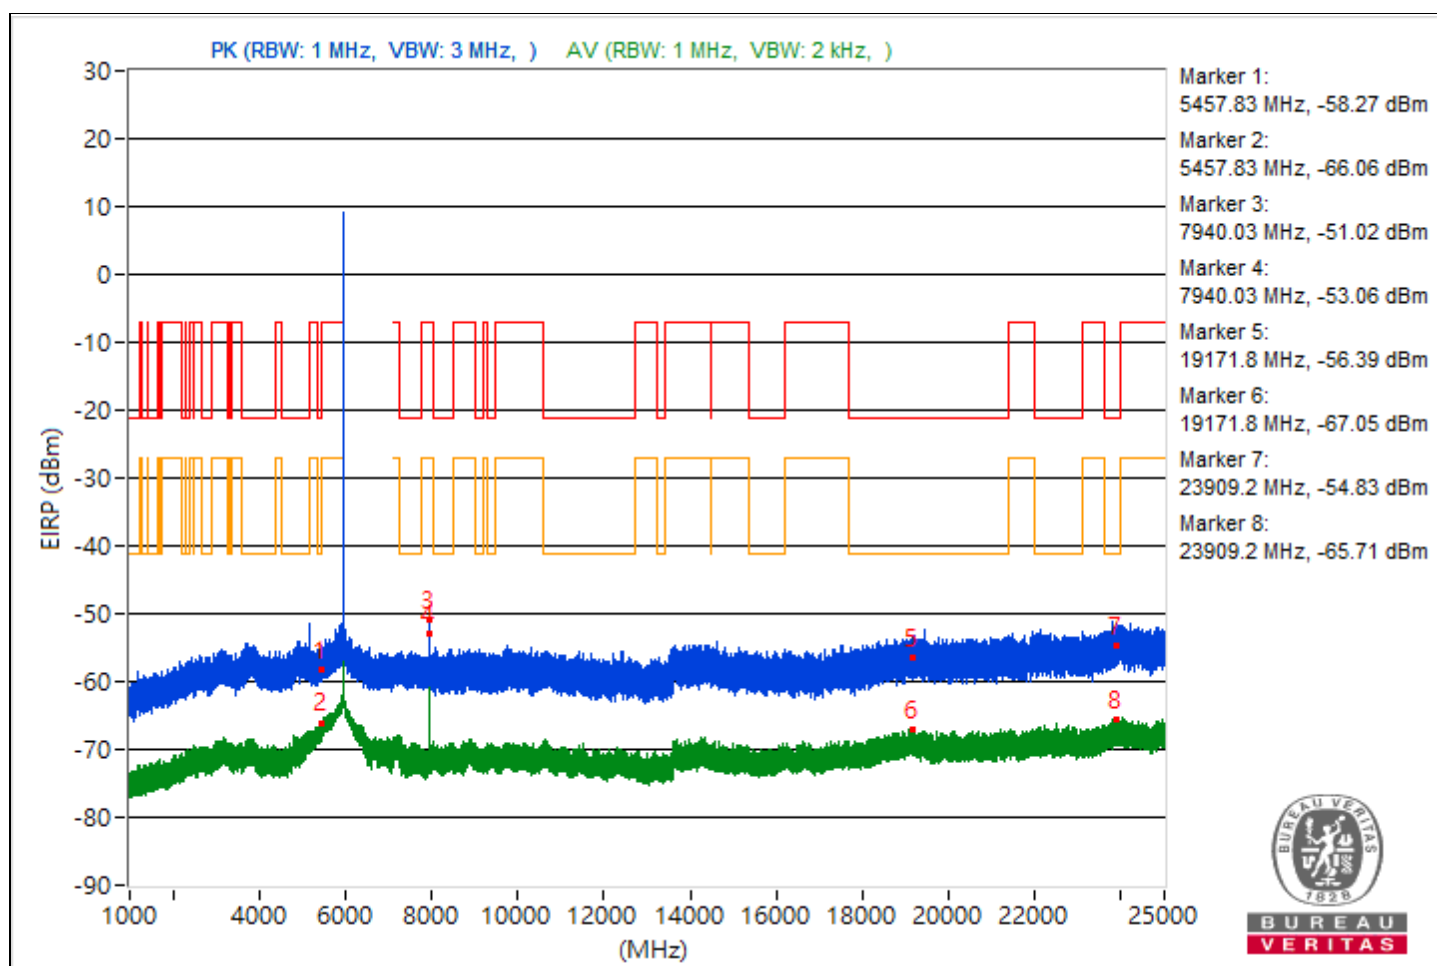


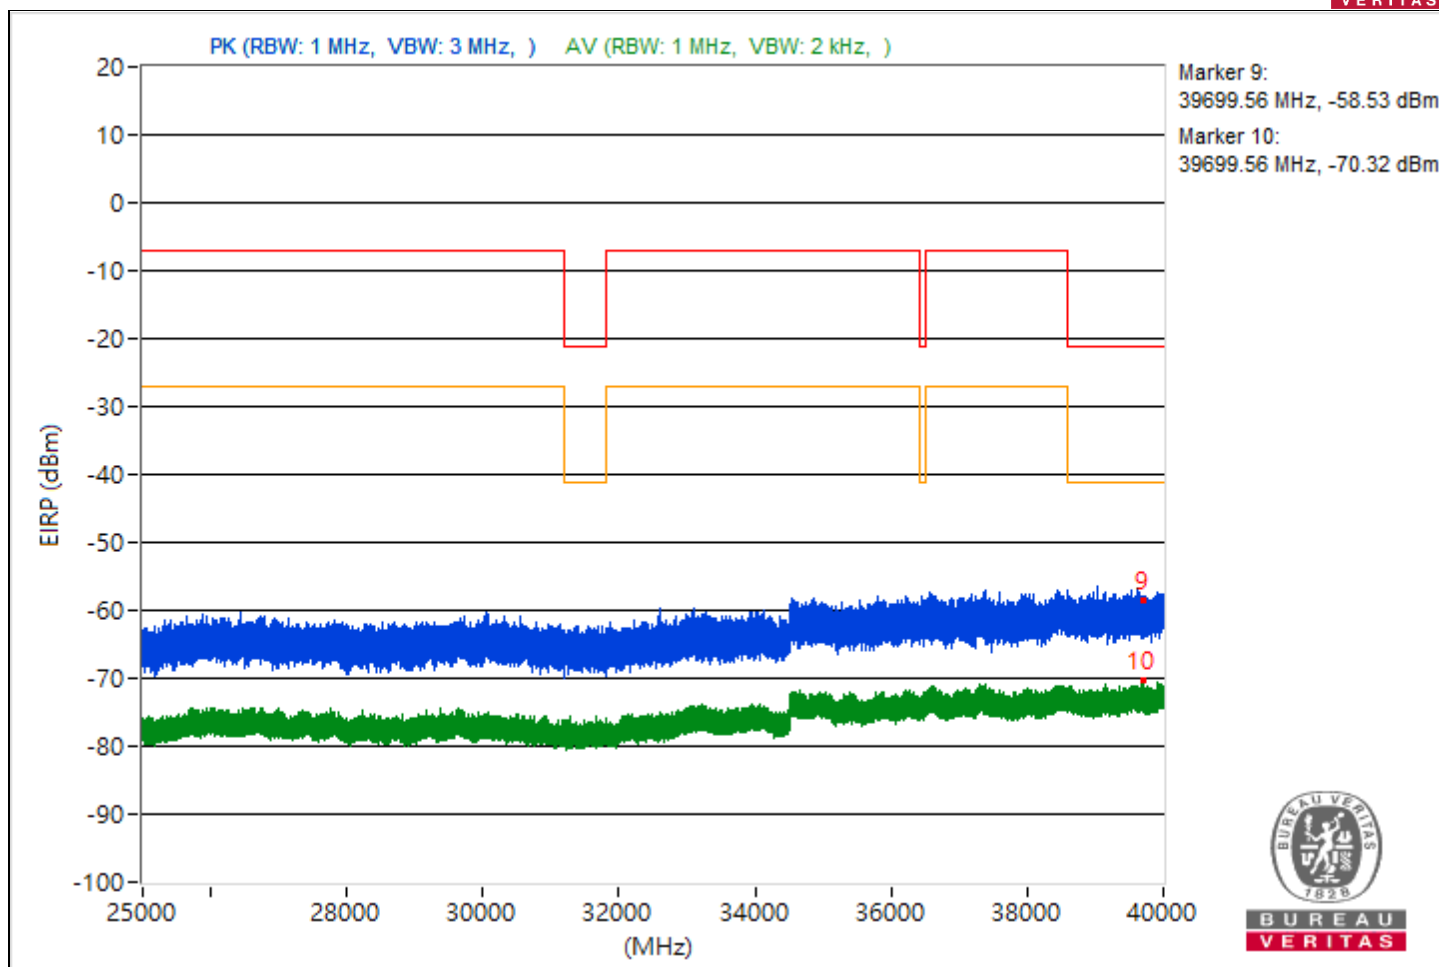


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.79	36.49 PK	74	-37.51	-70.71	-69.65	8.37	-58.77
2	5439.79	28.08 AV	54	-25.92	-78.04	-79.15	8.37	-67.18
3	7276.51	36.1 PK	74	-37.9	-70.32	-70.78	8.37	-59.16
4	7276.51	27.04 AV	54	-26.96	-81.15	-78.47	8.37	-68.22
5	19152.2	37.56 PK	74	-36.44	-68.77	-69.41	8.37	-57.7
6	19152.2	27.7 AV	54	-26.3	-80.94	-77.57	8.37	-67.56
7	23917.9	41.49 PK	74	-32.51	-64.21	-66.36	8.37	-53.77
8	23917.9	29.75 AV	54	-24.25	-75.65	-78.62	8.37	-65.51
9	39882.4	34.03 PK	74	-39.97	-73.29	-72.02	8.37	-61.23
10	39882.4	23.88 AV	54	-30.12	-81.02	-85.71	8.37	-71.38

Note: Margin value = Emission Level - Limit value

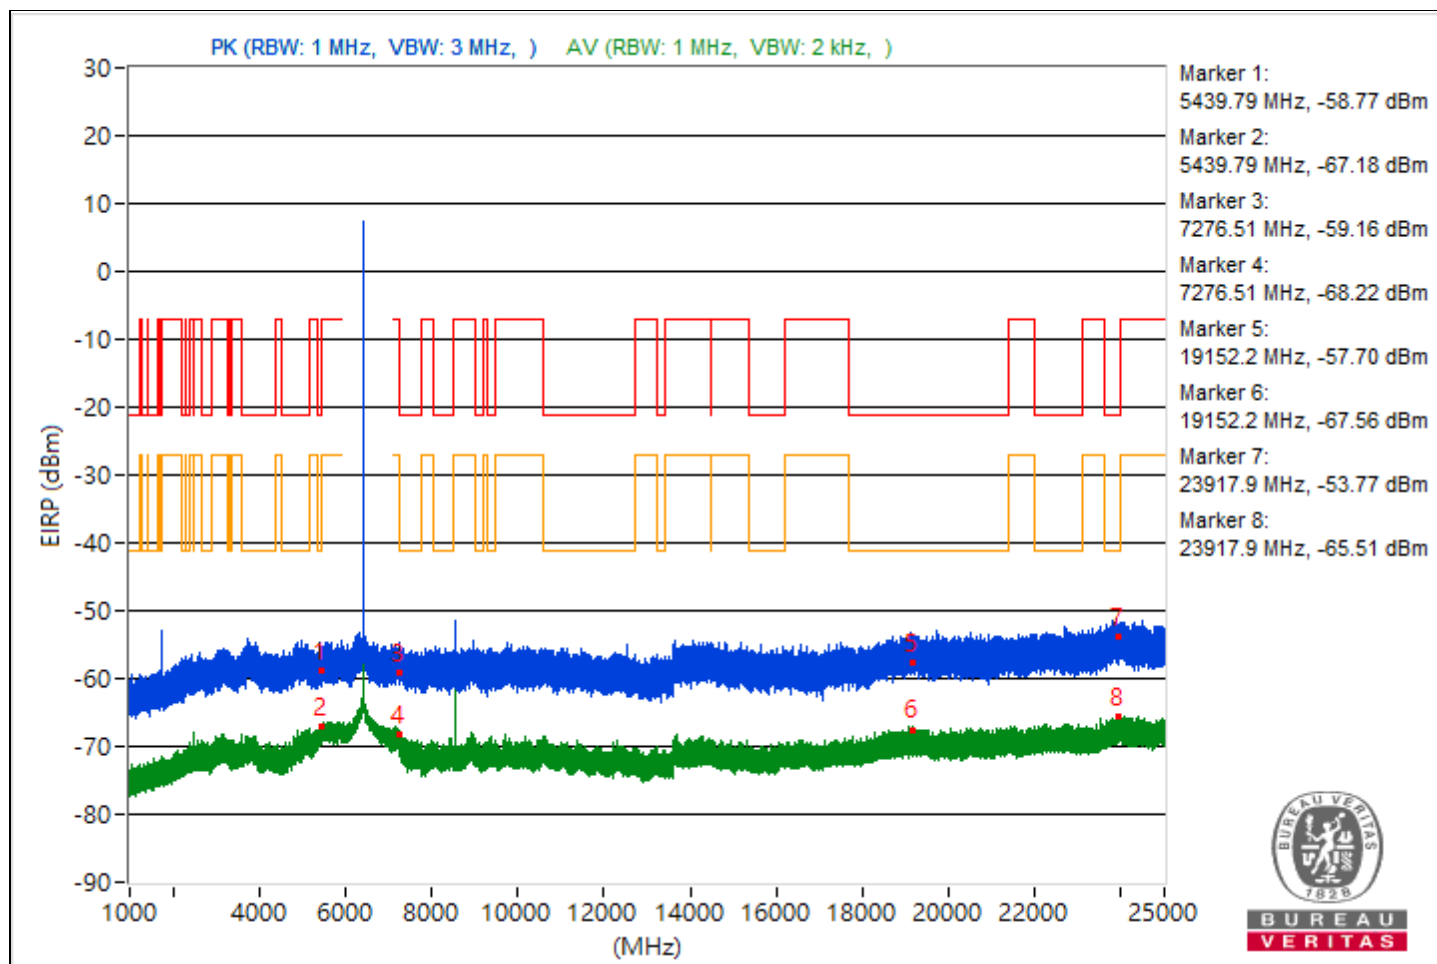


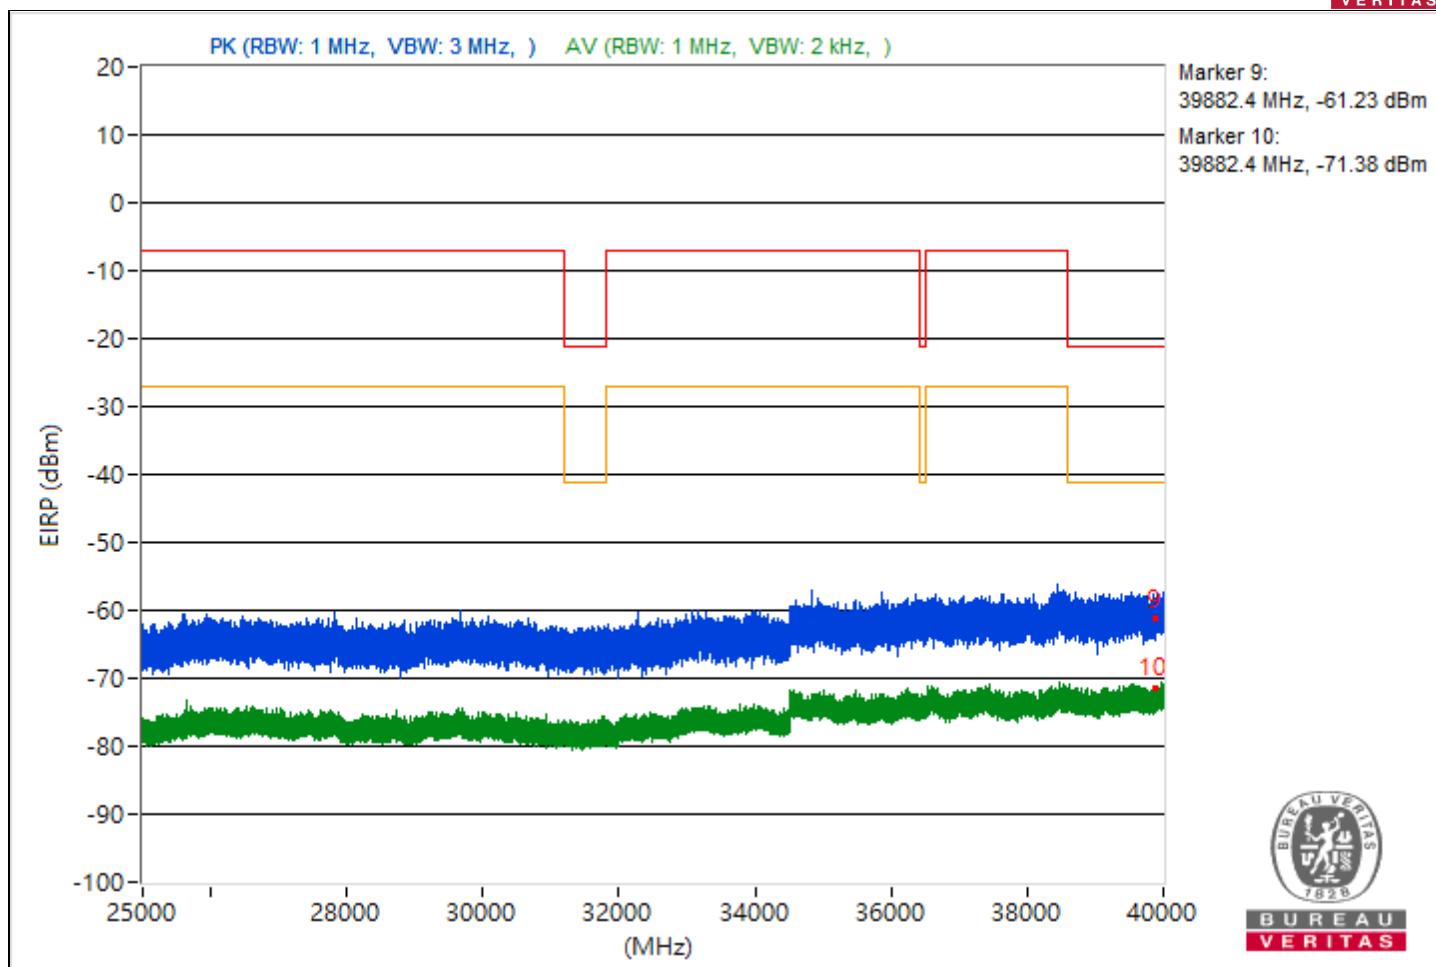


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5375	37.15 PK	74	-36.85	-70.19	-68.88	8.37	-58.11
2	5375	27.68 AV	54	-26.32	-80.15	-78.02	8.37	-67.58
3	7269.74	36.38 PK	74	-37.62	-70.69	-69.87	8.37	-58.88
4	7269.74	26.82 AV	54	-27.18	-78.47	-81.8	8.37	-68.44
5	19117.8	38.83 PK	74	-35.17	-69.97	-66.38	8.37	-56.43
6	19117.8	28.31 AV	54	-25.69	-81.02	-76.69	8.37	-66.95
7	23822.9	40.14 PK	74	-33.86	-66.88	-66.15	8.37	-55.12
8	23822.9	29.34 AV	54	-24.66	-75.71	-79.85	8.37	-65.92
9	39923.56	35.05 PK	74	-38.95	-72.74	-70.69	8.37	-60.21
10	39923.56	24.24 AV	54	-29.76	-85.31	-80.68	8.37	-71.02

Note: Margin value = Emission Level - Limit value

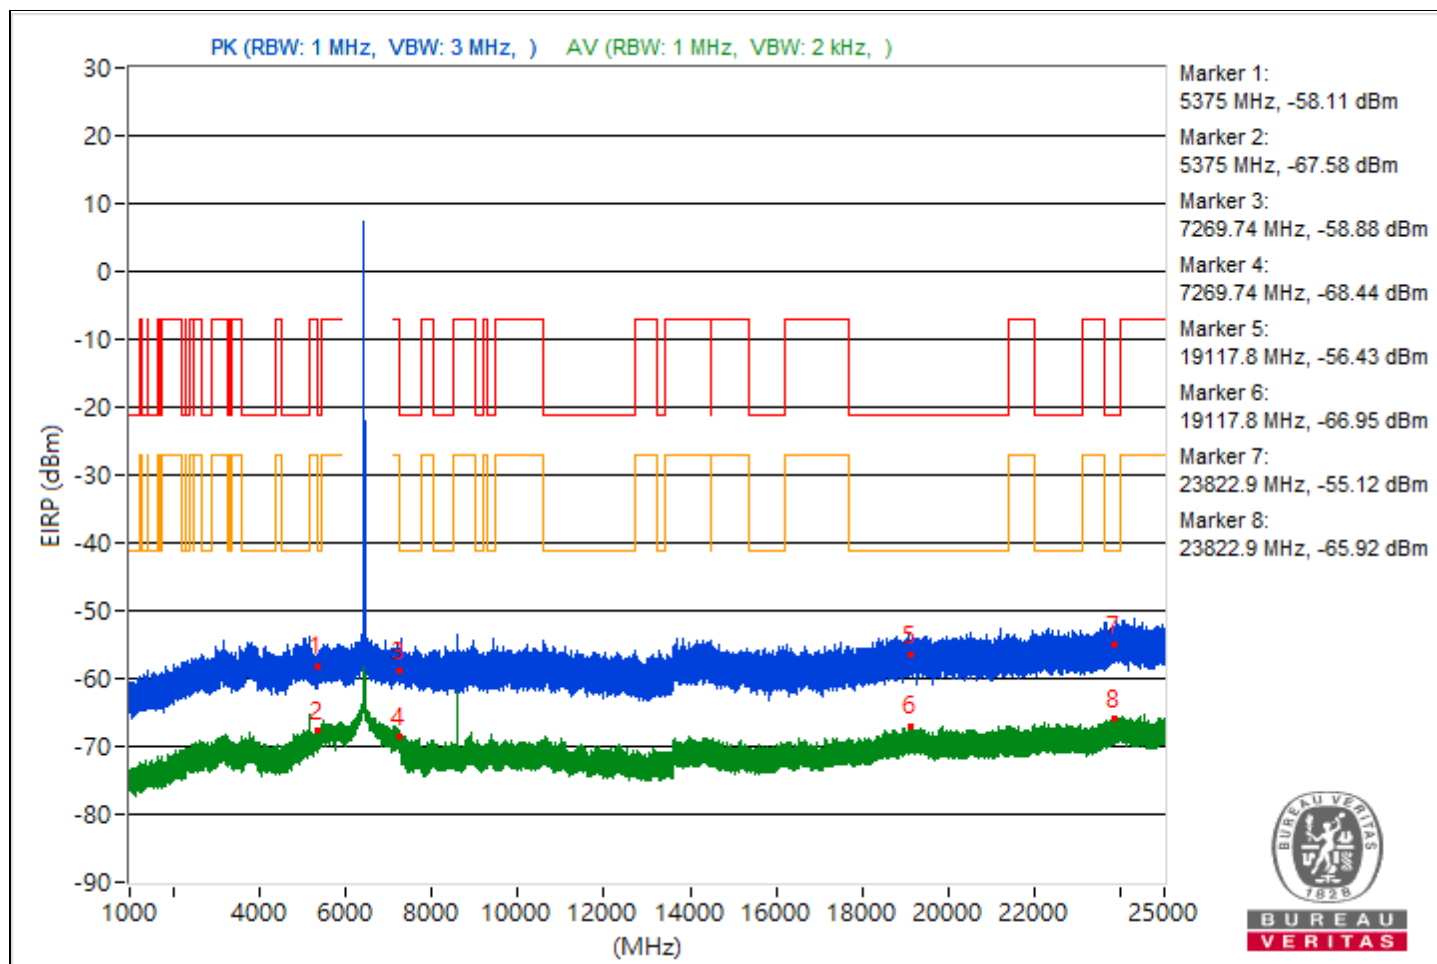


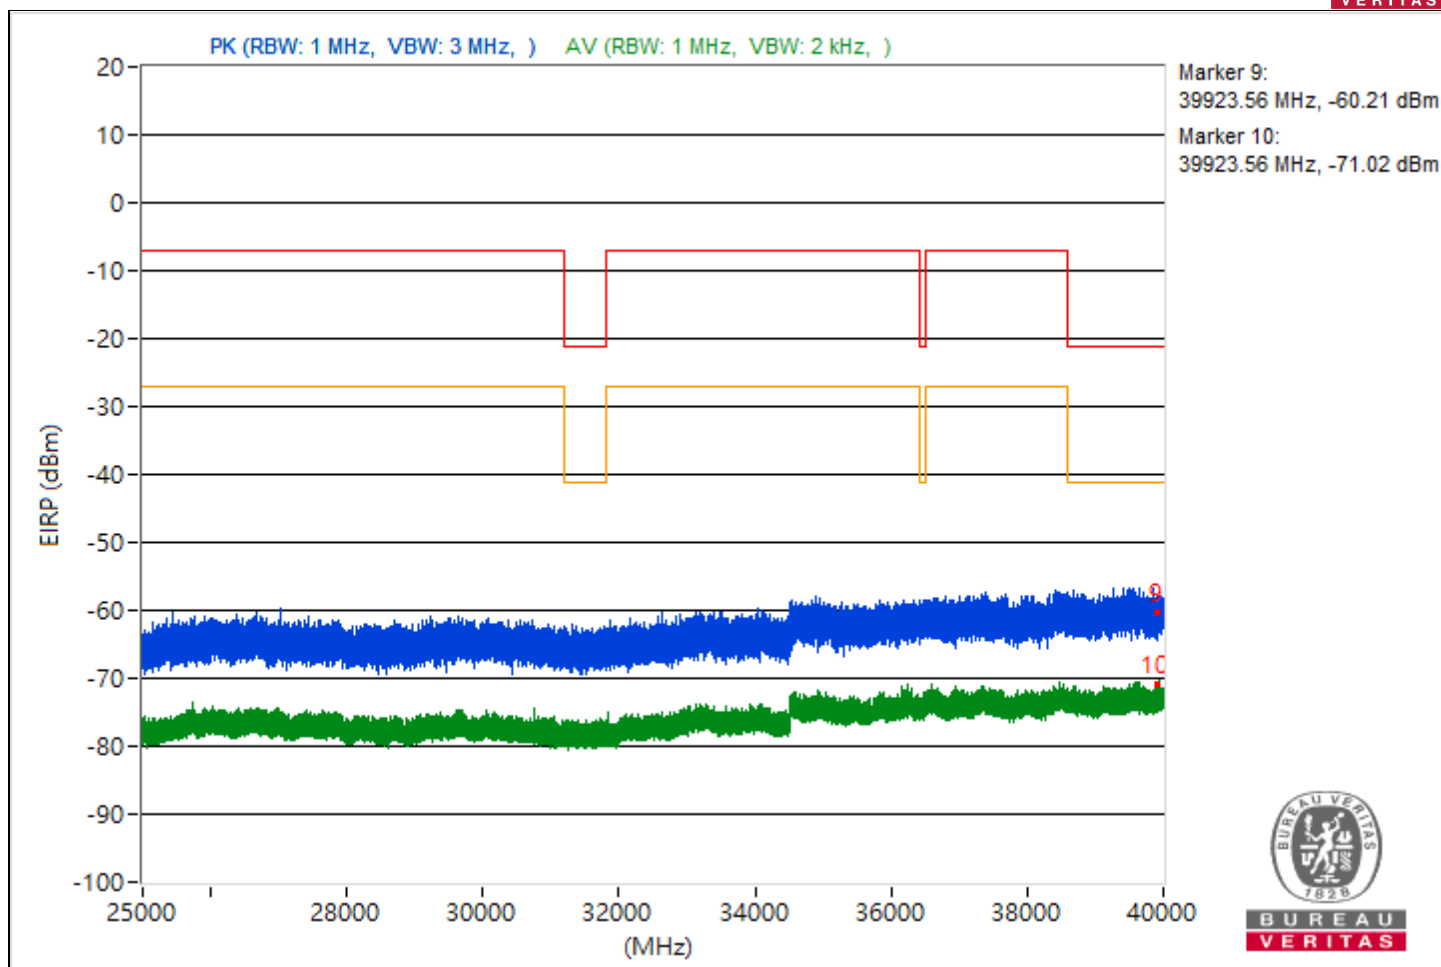


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5402.84	37.56 PK	74	-36.44	-67.65	-71.23	8.37	-57.7
2	5402.84	28.23 AV	54	-25.77	-77.7	-79.26	8.37	-67.03
3	7274.02	38.71 PK	74	-35.29	-68.03	-67.84	8.37	-56.55
4	7274.02	28.27 AV	54	-25.73	-77.82	-79.01	8.37	-66.99
5	19203.1	38.18 PK	74	-35.82	-68.68	-68.26	8.37	-57.08
6	19203.1	27.84 AV	54	-26.16	-77.29	-81.14	8.37	-67.42
7	23797.7	39.07 PK	74	-34.93	-66.85	-68.42	8.37	-56.19
8	23797.7	29.59 AV	54	-24.41	-75.93	-78.54	8.37	-65.67
9	39689.87	32.71 PK	74	-41.29	-74.52	-73.41	8.37	-62.55
10	39689.87	24.34 AV	54	-29.66	-84.14	-81.02	8.37	-70.92

Note: Margin value = Emission Level - Limit value

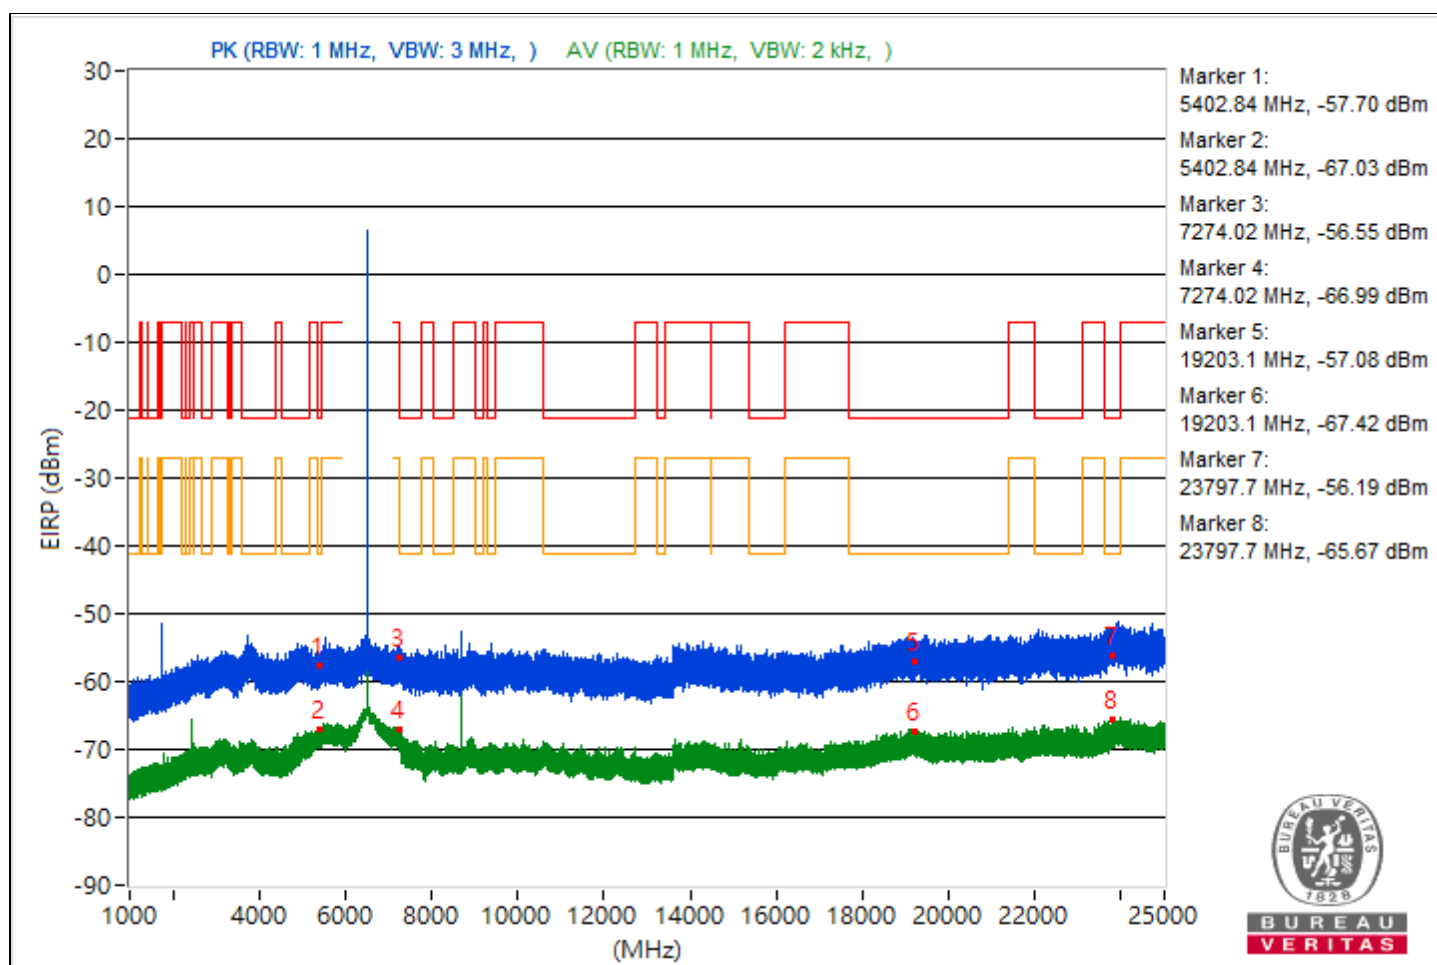


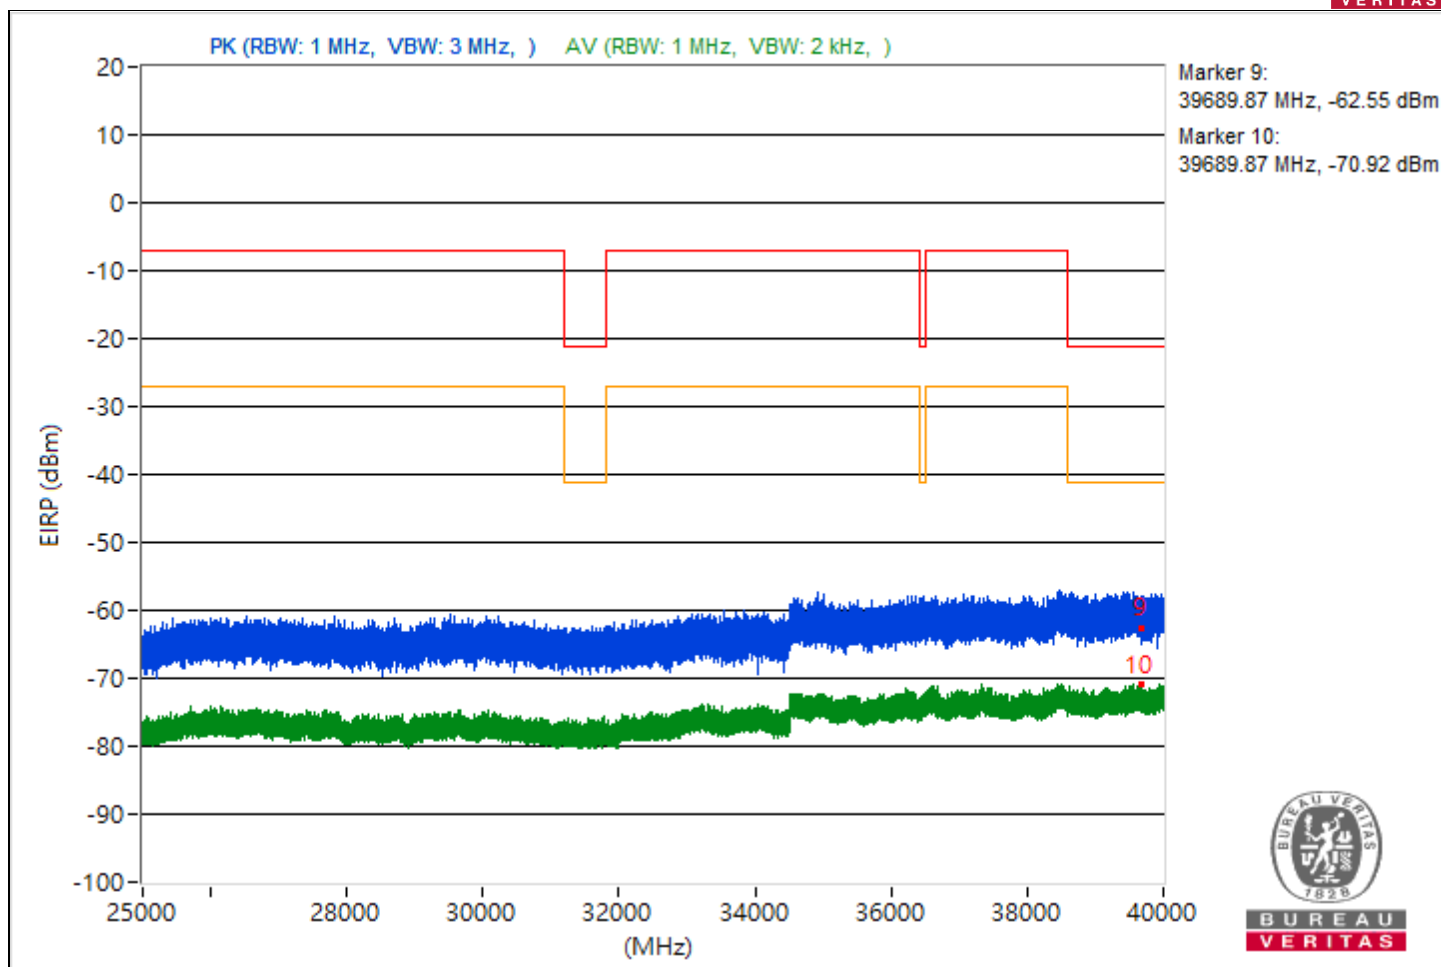


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5443.76	36.49 PK	74	-37.51	-69.8	-70.53	8.37	-58.77
2	5443.76	28.71 AV	54	-25.29	-77.48	-78.44	8.37	-66.55
3	7267.49	37.15 PK	74	-36.85	-69.58	-69.41	8.37	-58.11
4	7267.49	27.37 AV	54	-26.63	-80.08	-78.58	8.37	-67.89
5	21360.5	39.61 PK	74	-34.39	-65.65	-69.07	8.37	-55.65
6	21360.5	28.14 AV	54	-25.86	-77.33	-80.1	8.37	-67.12
7	23931	40.2 PK	74	-33.8	-66.09	-66.83	8.37	-55.06
8	23931	29.38 AV	54	-24.62	-79.8	-75.67	8.37	-65.88
9	39559.47	34.16 PK	74	-39.84	-71.56	-73.65	8.37	-61.1
10	39559.47	24.4 AV	54	-29.6	-81.31	-83.42	8.37	-70.86

Note: Margin value = Emission Level - Limit value

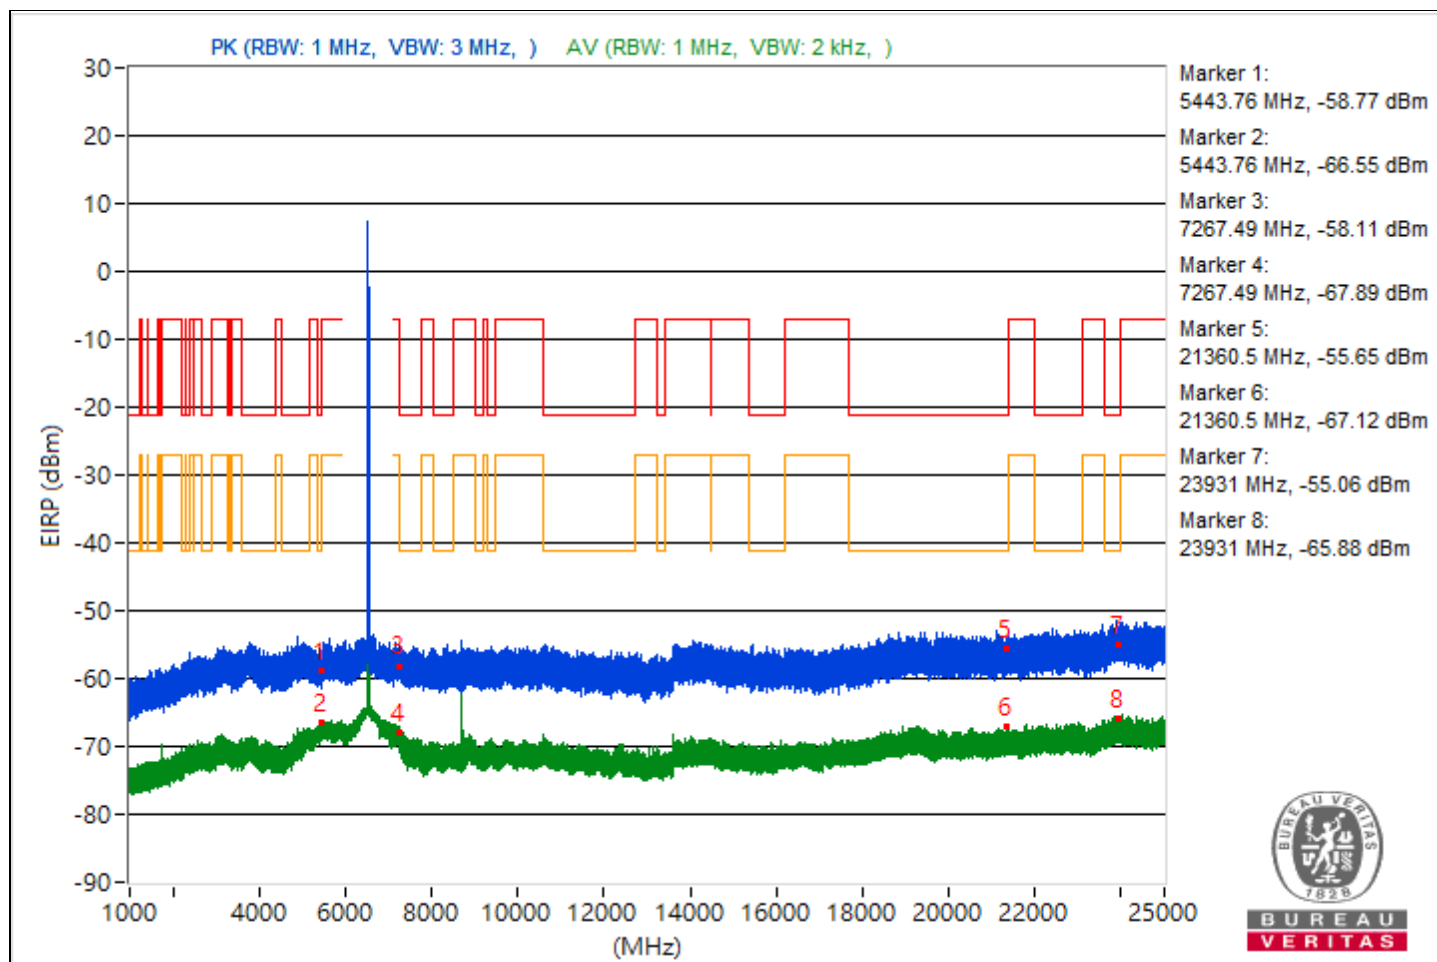


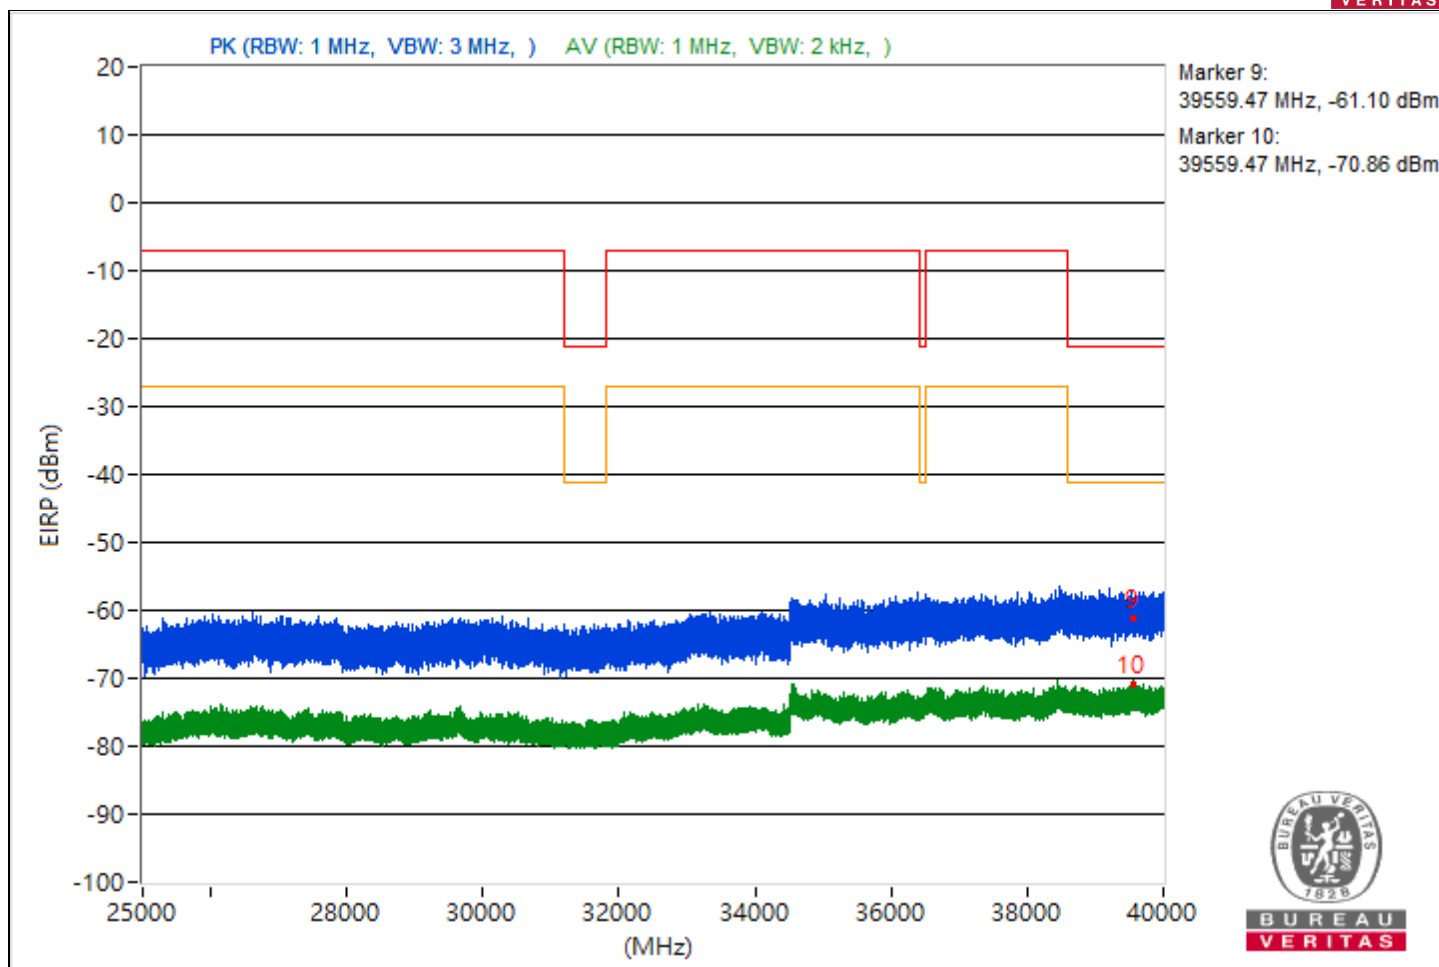


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5412.33	36.09 PK	74	-37.91	-70.81	-70.31	8.37	-59.17
2	5412.33	28.72 AV	54	-25.28	-78.62	-77.31	8.37	-66.54
3	9166.76	38.96 PK	74	-35.04	-67.62	-67.74	8.37	-56.3
4	9166.76	34.73 AV	54	-19.27	-69.38	-78.71	8.37	-60.53
5	21274.5	38.38 PK	74	-35.62	-67.82	-68.75	8.37	-56.88
6	21274.5	27.75 AV	54	-26.25	-81.11	-77.43	8.37	-67.51
7	23856.4	39.99 PK	74	-34.01	-66.87	-66.44	8.37	-55.27
8	23856.4	30.47 AV	54	-23.53	-75.21	-77.4	8.37	-64.79
9	39693.42	35.6 PK	74	-38.4	-71.11	-70.97	8.37	-59.66
10	39693.42	24.29 AV	54	-29.71	-80.71	-85.02	8.37	-70.97

Note: Margin value = Emission Level - Limit value

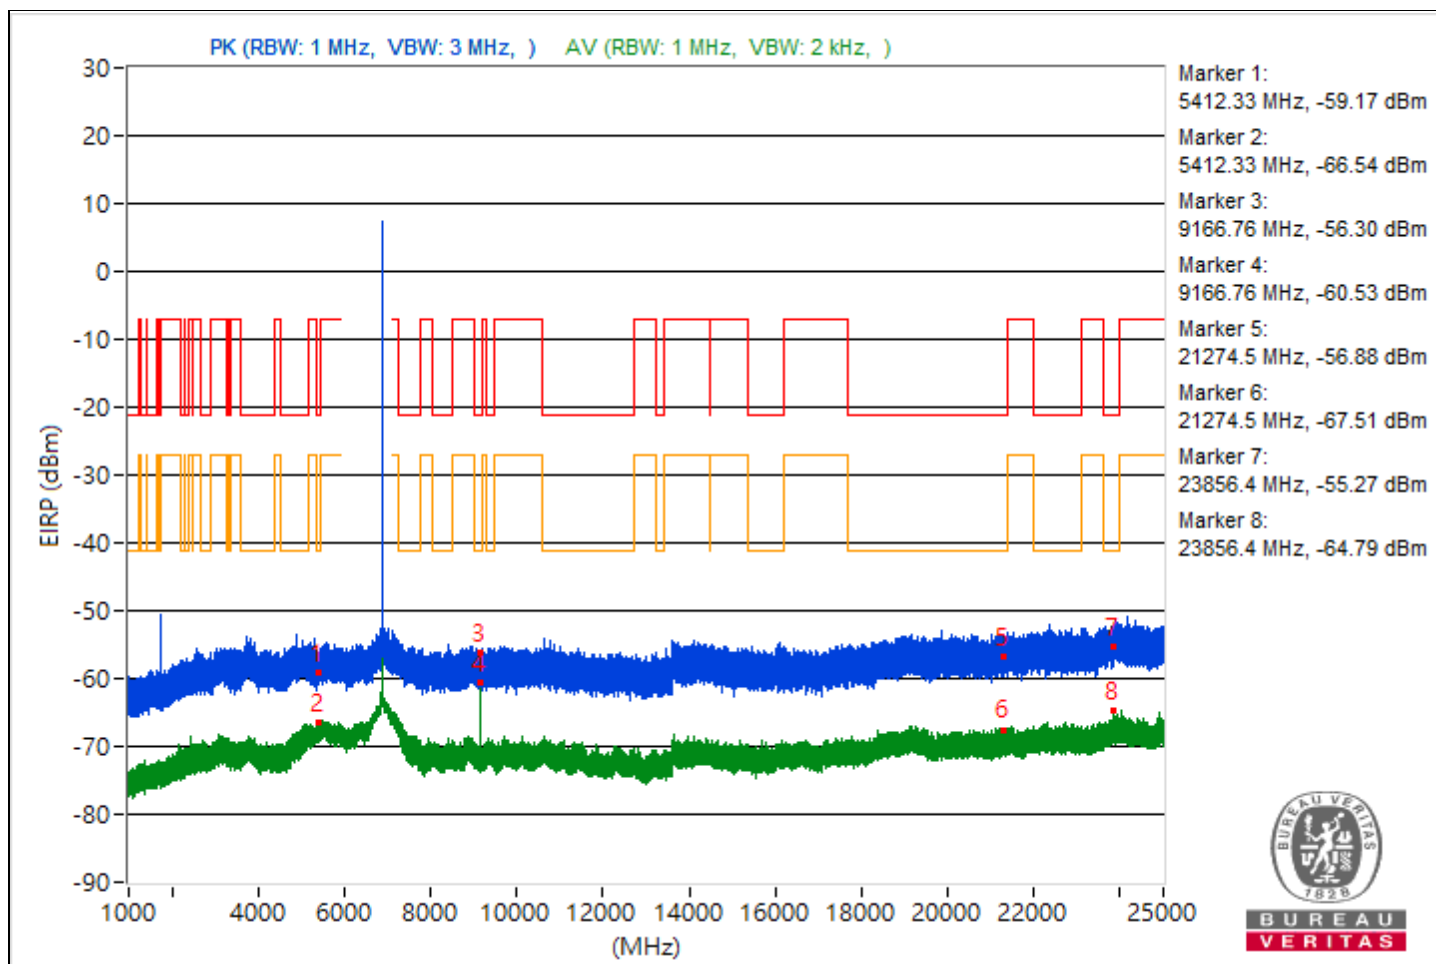


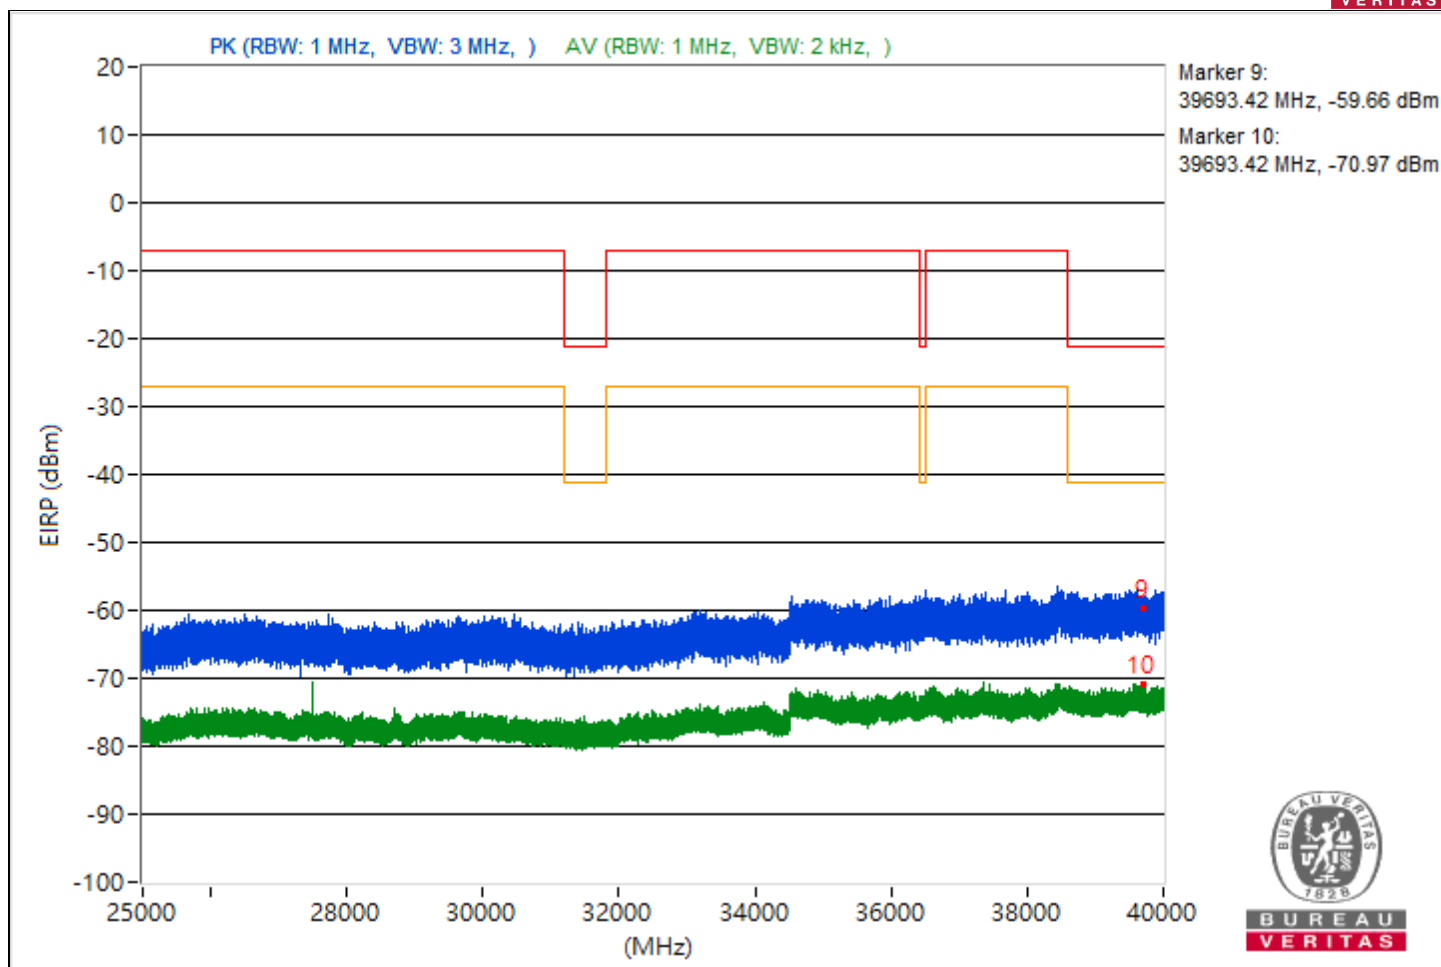


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5407.98	35.83 PK	74	-38.17	-71.36	-70.32	8.37	-59.43
2	5407.98	28.46 AV	54	-25.54	-79.35	-77.26	8.37	-66.8
3	9326.22	40.35 PK	74	-33.65	-65.49	-67.28	8.37	-54.91
4	9326.22	32.1 AV	54	-21.9	-71.94	-81.97	8.37	-63.16
5	19202.4	37.93 PK	74	-36.07	-68.56	-68.86	8.37	-57.33
6	19202.4	27.86 AV	54	-26.14	-81.29	-77.2	8.37	-67.4
7	23933.2	40.55 PK	74	-33.45	-67.64	-64.95	8.37	-54.71
8	23933.2	29.4 AV	54	-24.6	-79.7	-75.68	8.37	-65.86
9	39493.24	35.17 PK	74	-38.83	-70.26	-73.16	8.37	-60.09
10	39493.24	24.04 AV	54	-29.96	-85.04	-81.04	8.37	-71.22

Note: Margin value = Emission Level - Limit value

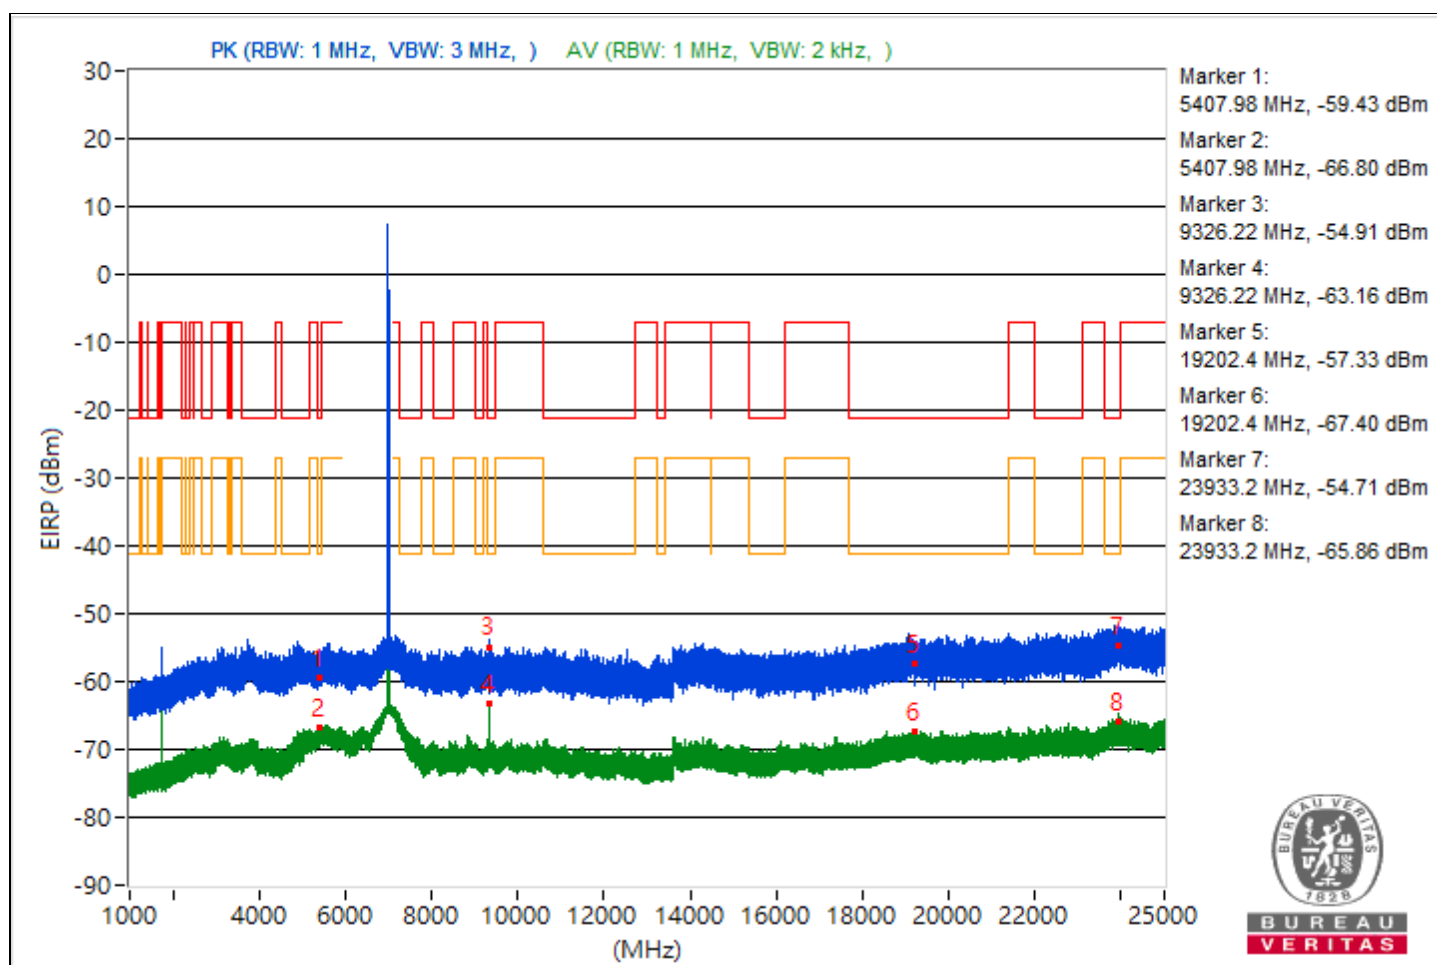


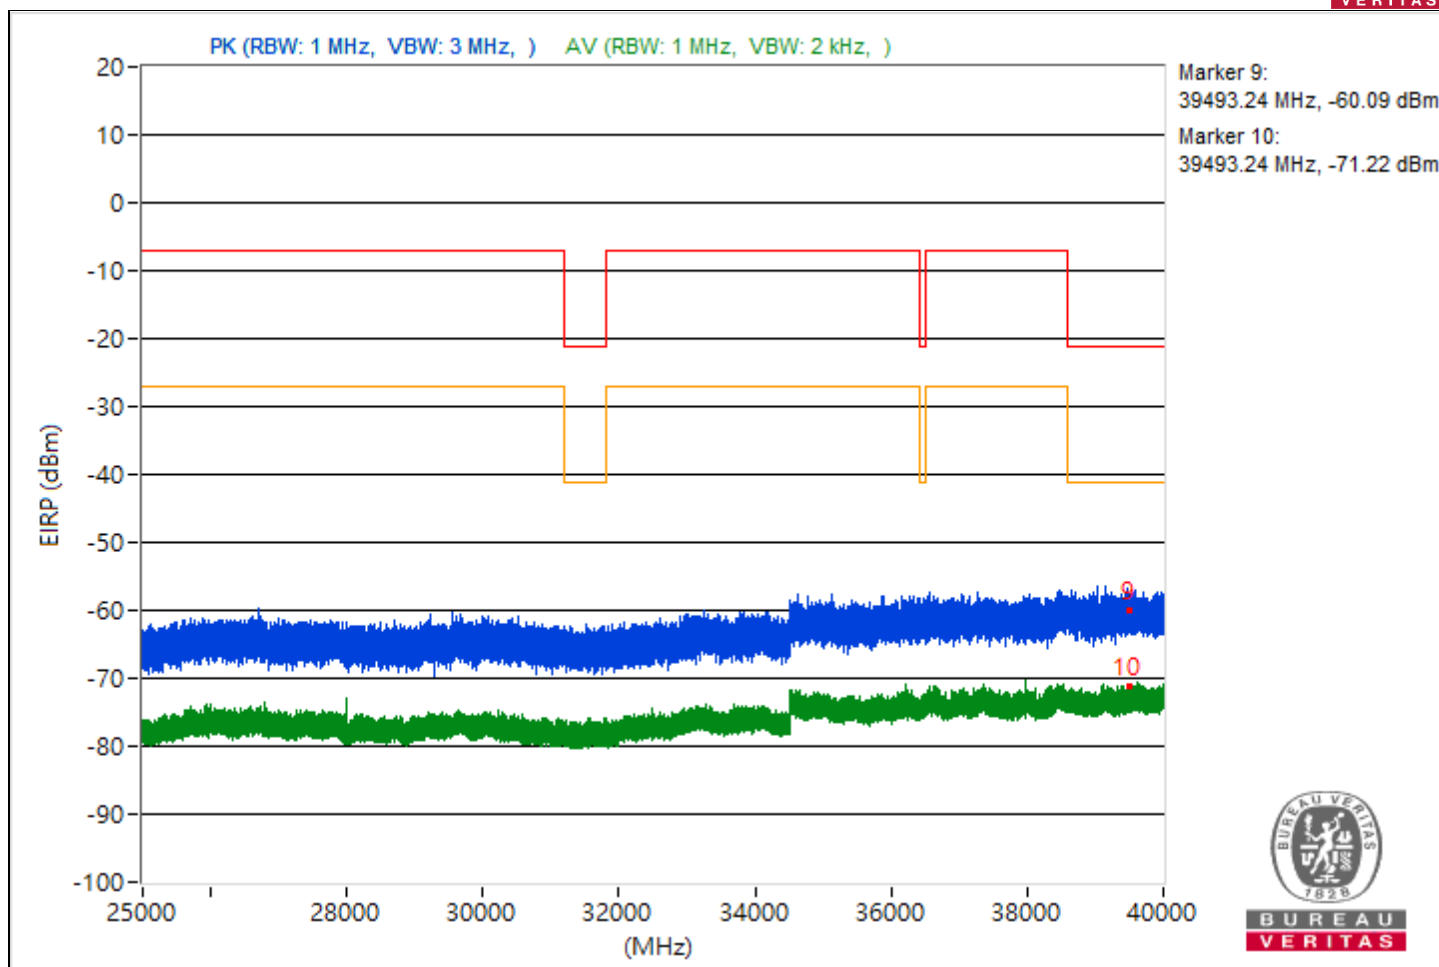


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.54	36.01 PK	74	-37.99	-71.9	-69.66	8.37	-59.25
2	5452.54	27.12 AV	54	-26.88	-84.18	-77.32	8.37	-68.14
3	9166.76	43.68 PK	74	-30.32	-60.29	-71.16	8.37	-51.58
4	9166.76	41.29 AV	54	-12.71	-62.37	-83.81	8.37	-53.97
5	20154.9	38.02 PK	74	-35.98	-69.05	-68.23	8.37	-57.24
6	20154.9	28.22 AV	54	-25.78	-76.82	-80.99	8.37	-67.04
7	23927.1	40.34 PK	74	-33.66	-67.04	-65.68	8.37	-54.92
8	23927.1	29.88 AV	54	-24.12	-75.78	-78.03	8.37	-65.38
9	39705.69	35.27 PK	74	-38.73	-70.86	-71.96	8.37	-59.99
10	39705.69	24 AV	54	-30	-80.96	-85.42	8.37	-71.26

Note: Margin value = Emission Level - Limit value

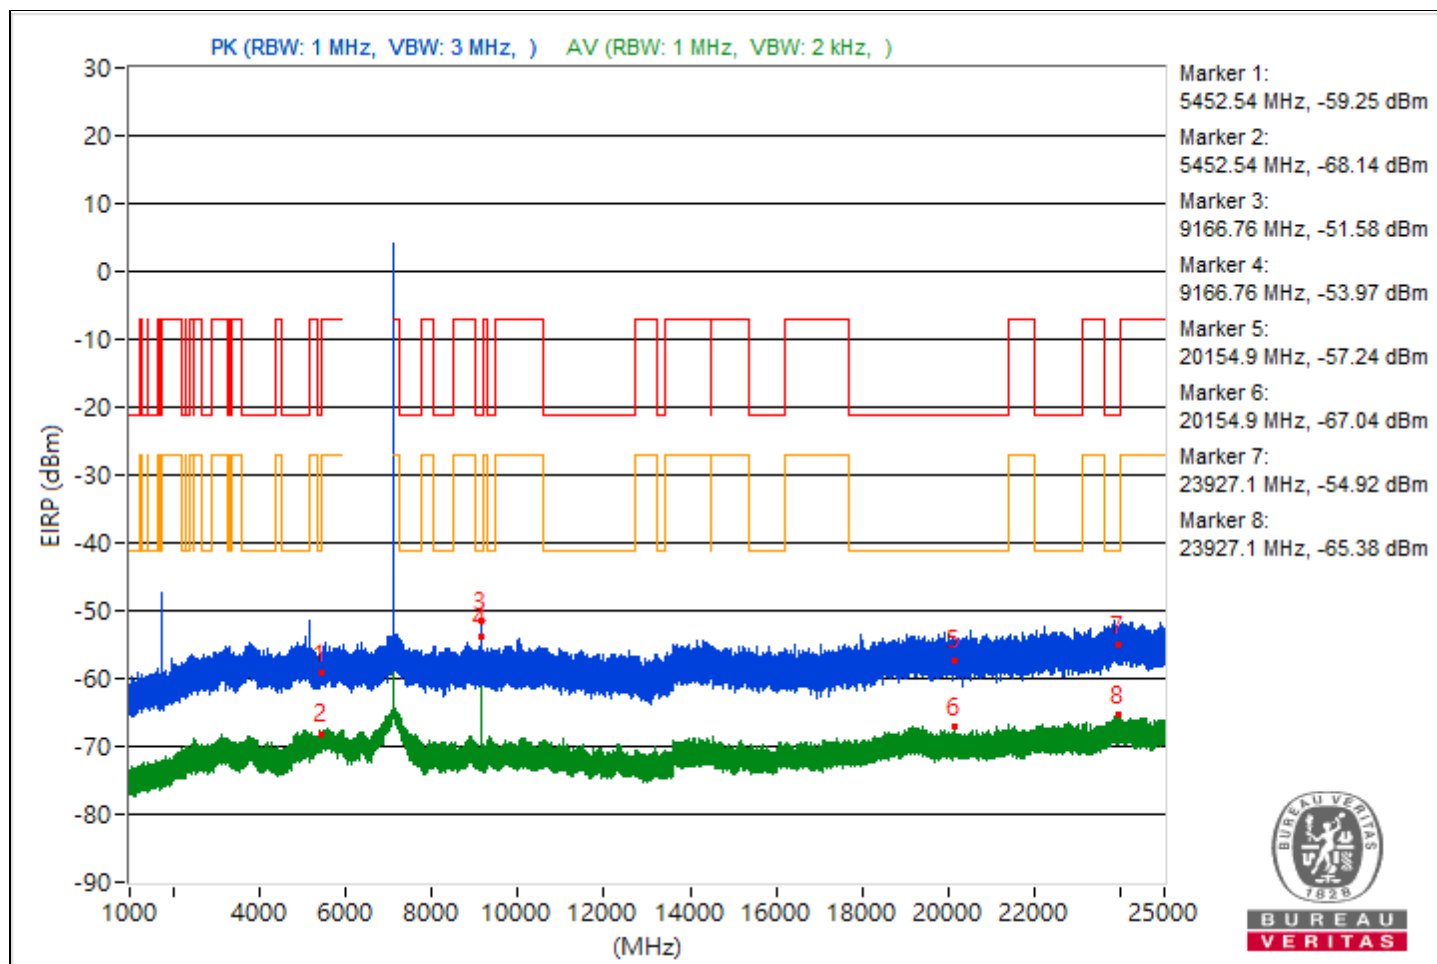


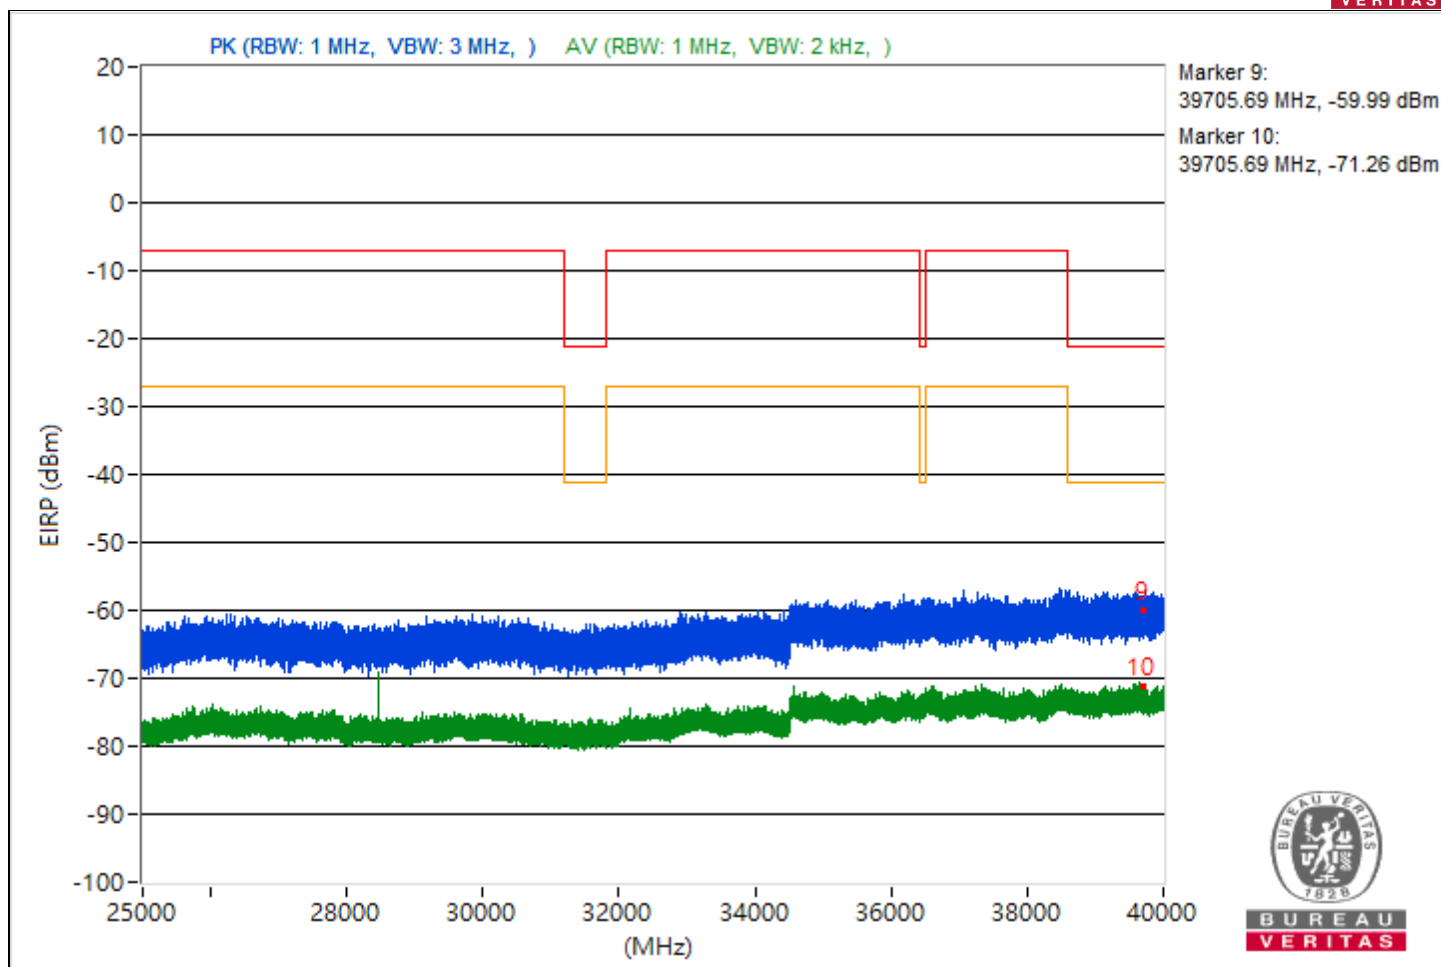


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.58	37.29 PK	74	-36.71	-69.35	-69.35	8.37	-57.97
2	5455.58	29.55 AV	54	-24.45	-77.09	-77.09	8.37	-65.71
3	7282.58	35.27 PK	74	-38.73	-71.37	-71.37	8.37	-59.99
4	7282.58	27.1 AV	54	-26.9	-79.54	-79.54	8.37	-68.16
5	20629.2	38.62 PK	74	-35.38	-68.02	-68.02	8.37	-56.64
6	20629.2	28.95 AV	54	-25.05	-77.69	-77.69	8.37	-66.31
7	23949.5	40.21 PK	74	-33.79	-66.43	-66.43	8.37	-55.05
8	23949.5	30.21 AV	54	-23.79	-76.43	-76.43	8.37	-65.05
9	39081.87	34.97 PK	74	-39.03	-71.67	-71.67	8.37	-60.29
10	39081.87	25.17 AV	54	-28.83	-81.47	-81.47	8.37	-70.09

Note: Margin value = Emission Level - Limit value

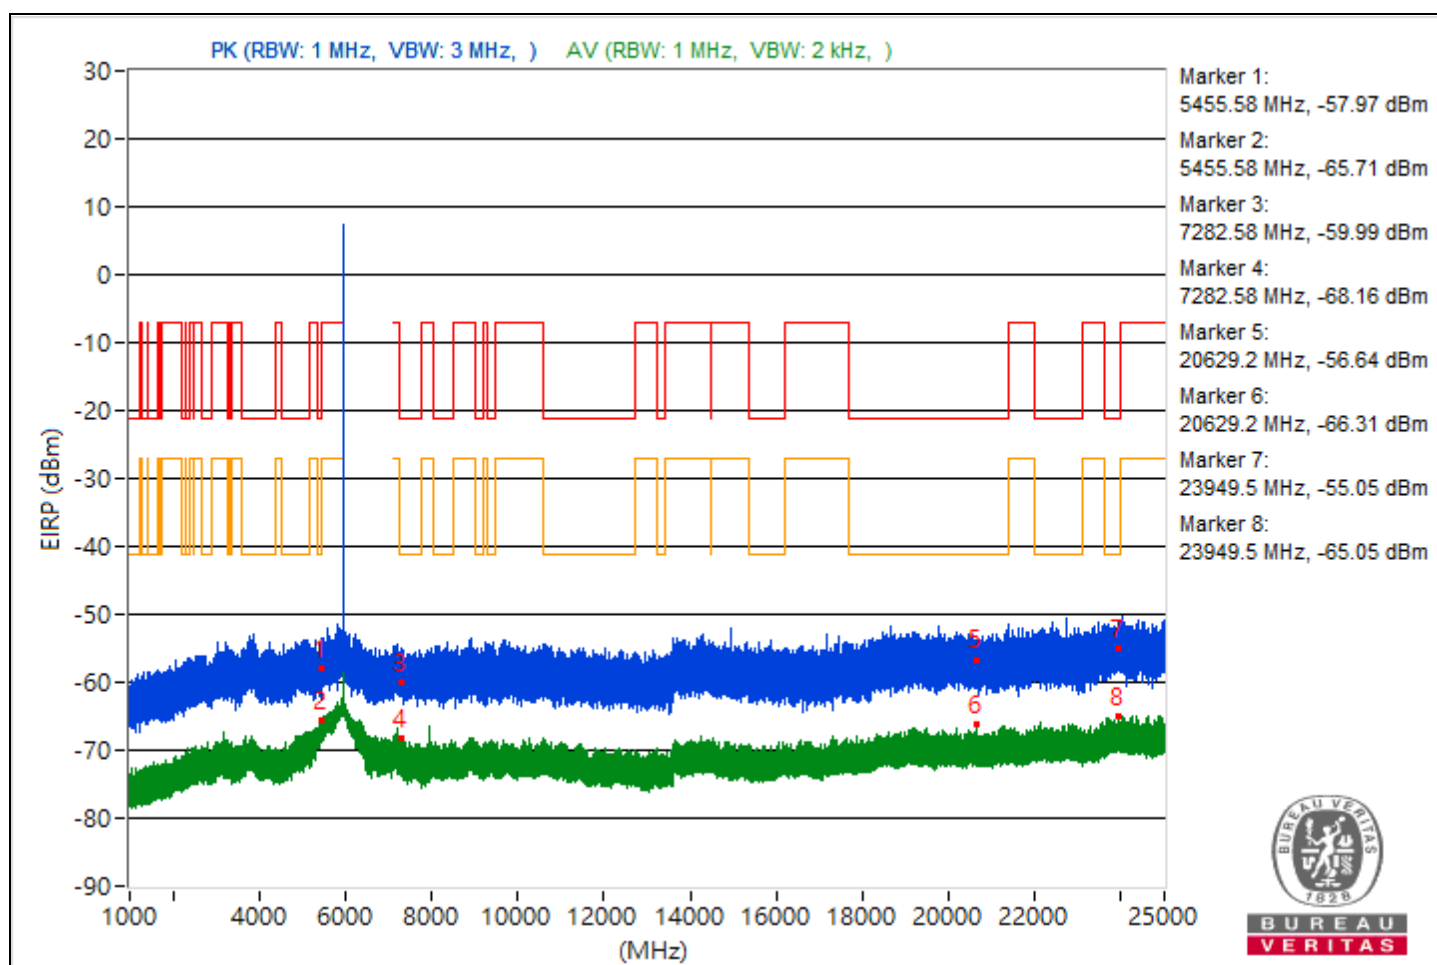


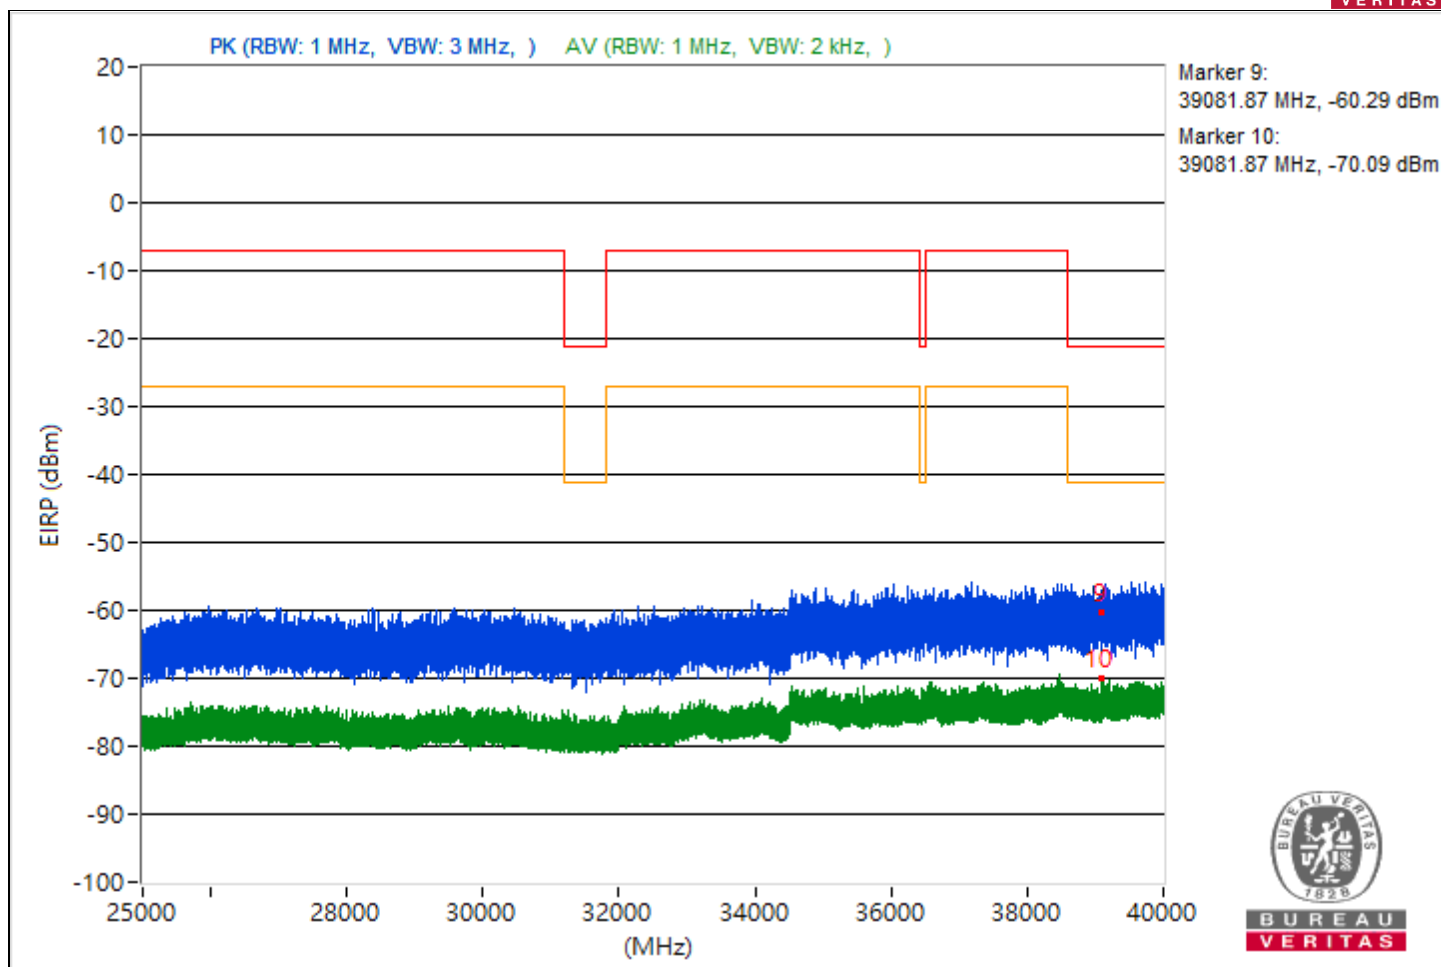


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5436.13	37.24 PK	74	-36.76	-70.81	-68.34	8.37	-58.02
2	5436.13	27.42 AV	54	-26.58	-78.32	-80.35	8.37	-67.84
3	7264.07	36.26 PK	74	-37.74	-70.1	-70.68	8.37	-59
4	7264.07	25.87 AV	54	-28.13	-79.14	-83.4	8.37	-69.39
5	21248.4	37.89 PK	74	-36.11	-68.42	-69.1	8.37	-57.37
6	21248.4	27.9 AV	54	-26.1	-80.55	-77.47	8.37	-67.36
7	23968.2	40.25 PK	74	-33.75	-66.75	-66.06	8.37	-55.01
8	23968.2	29.75 AV	54	-24.25	-74.9	-80.7	8.37	-65.51
9	39428.36	35.28 PK	74	-38.72	-70.42	-72.57	8.37	-59.98
10	39428.36	24.13 AV	54	-29.87	-80.77	-85.47	8.37	-71.13

Note: Margin value = Emission Level - Limit value

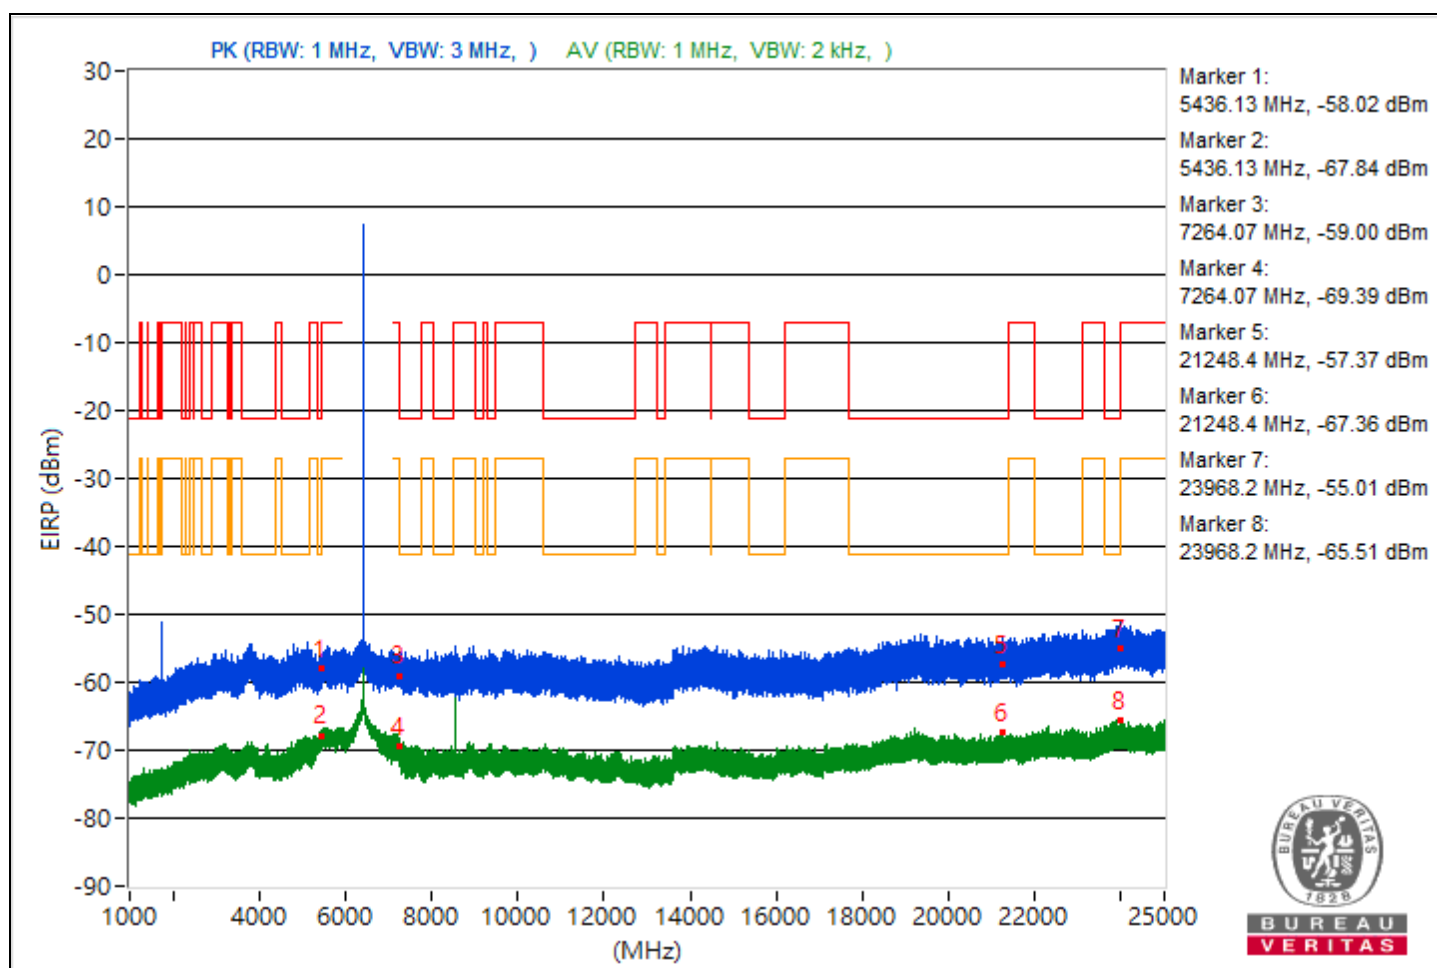


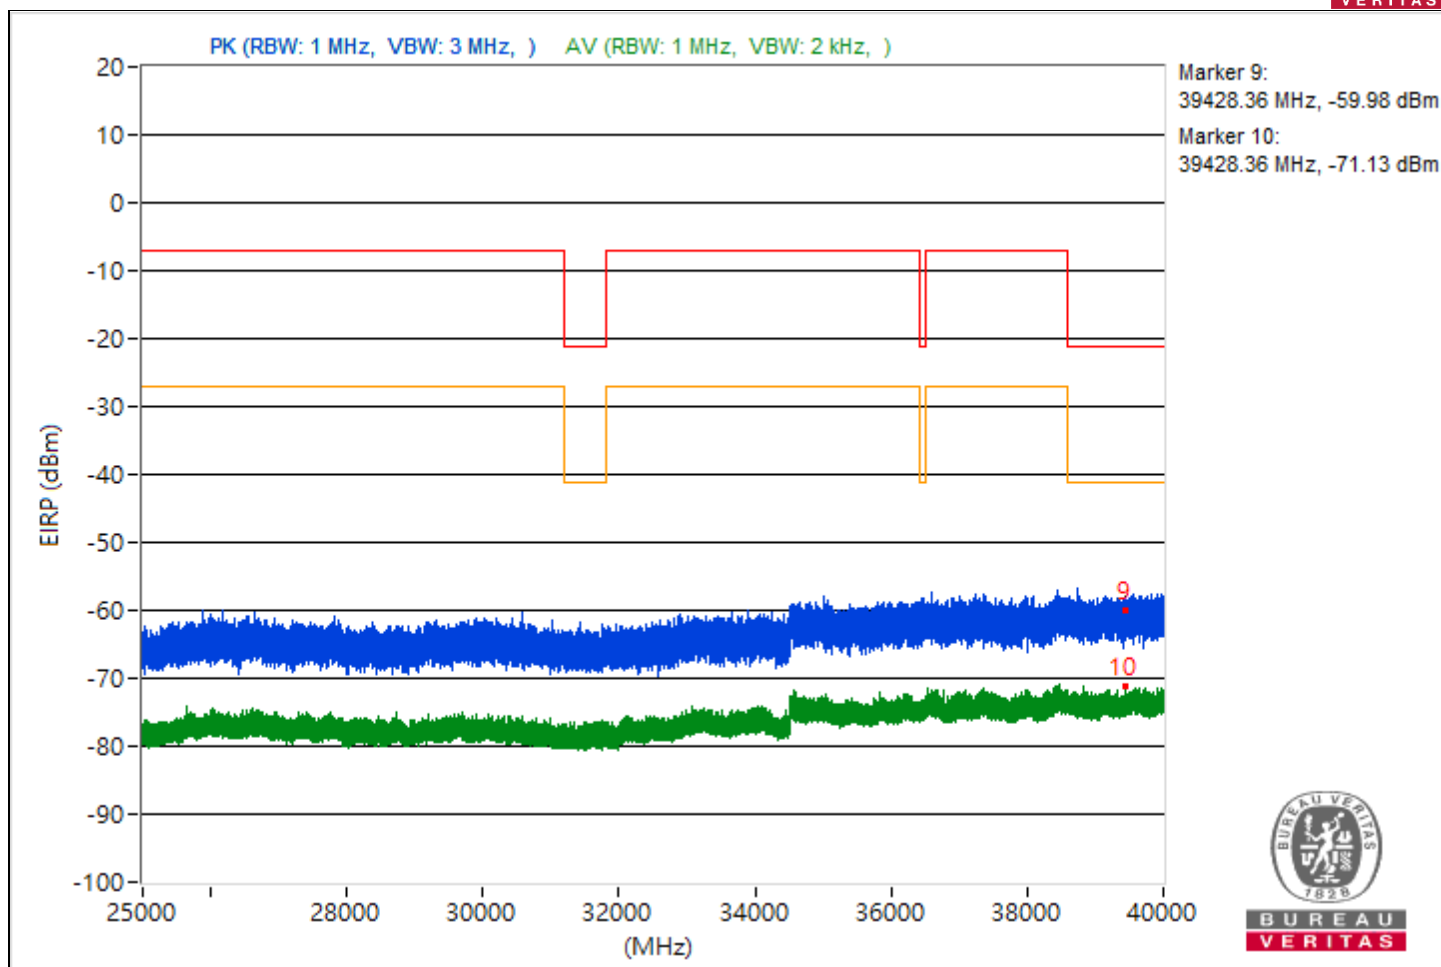


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.4	38 PK	74	-36	-68.64	-68.64	8.37	-57.26
2	5453.4	28.65 AV	54	-25.35	-77.99	-77.99	8.37	-66.61
3	7256.6	37.72 PK	74	-36.28	-68.92	-68.92	8.37	-57.54
4	7256.6	28.22 AV	54	-25.78	-78.42	-78.42	8.37	-67.04
5	19859.5	40.68 PK	74	-33.32	-65.96	-65.96	8.37	-54.58
6	19859.5	28.86 AV	54	-25.14	-77.78	-77.78	8.37	-66.4
7	23995.4	39.35 PK	74	-34.65	-67.29	-67.29	8.37	-55.91
8	23995.4	30.03 AV	54	-23.97	-76.61	-76.61	8.37	-65.23
9	39976.8	34.09 PK	74	-39.91	-72.55	-72.55	8.37	-61.17
10	39976.8	25.21 AV	54	-28.79	-81.43	-81.43	8.37	-70.05

Note: Margin value = Emission Level - Limit value

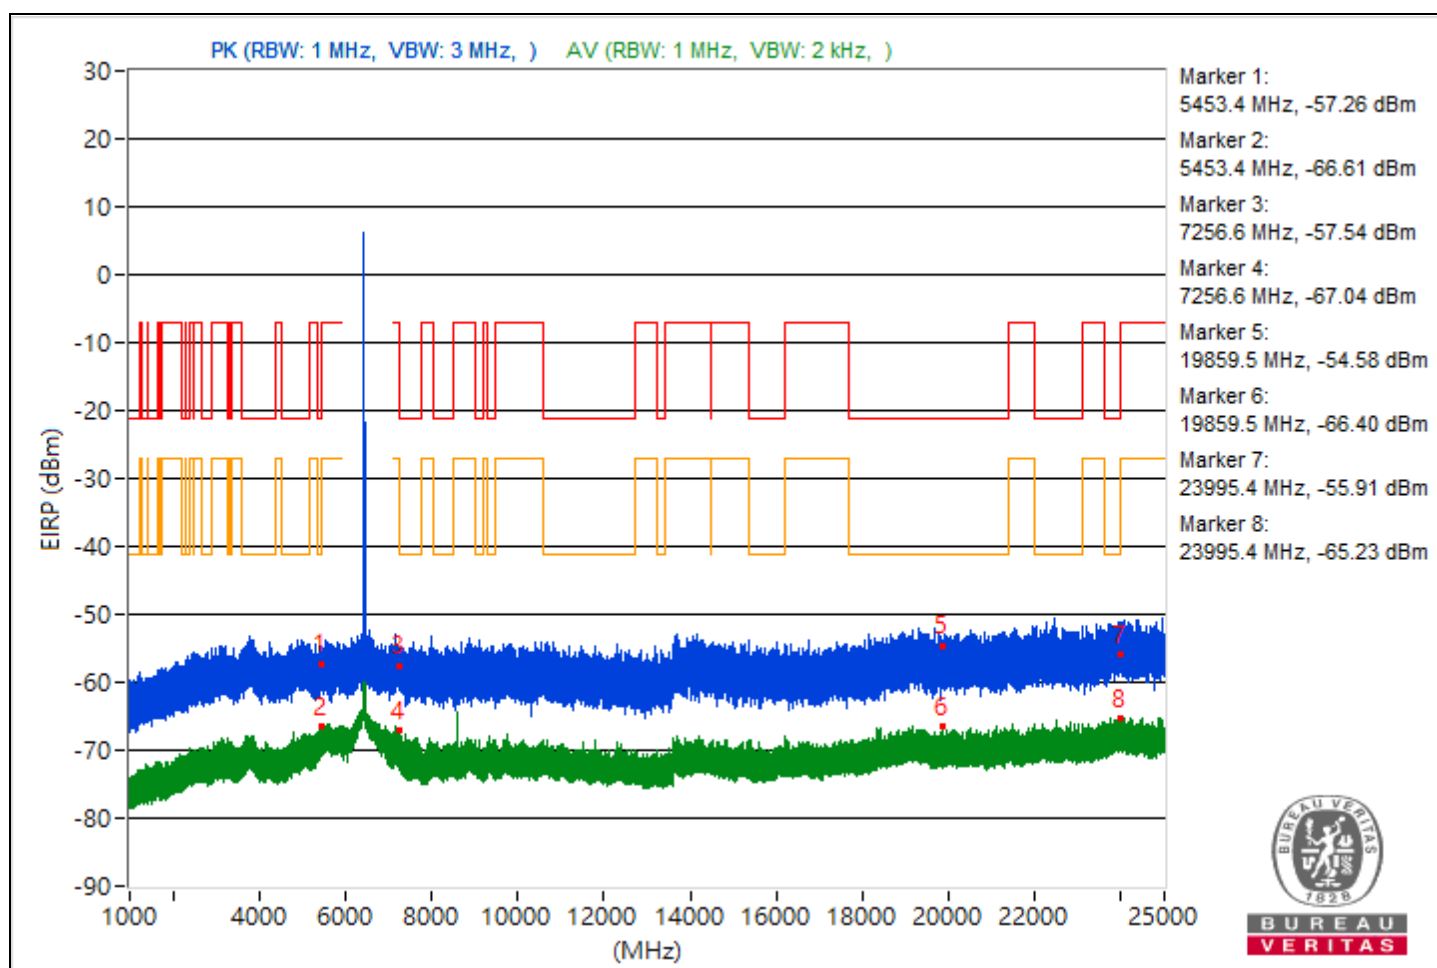


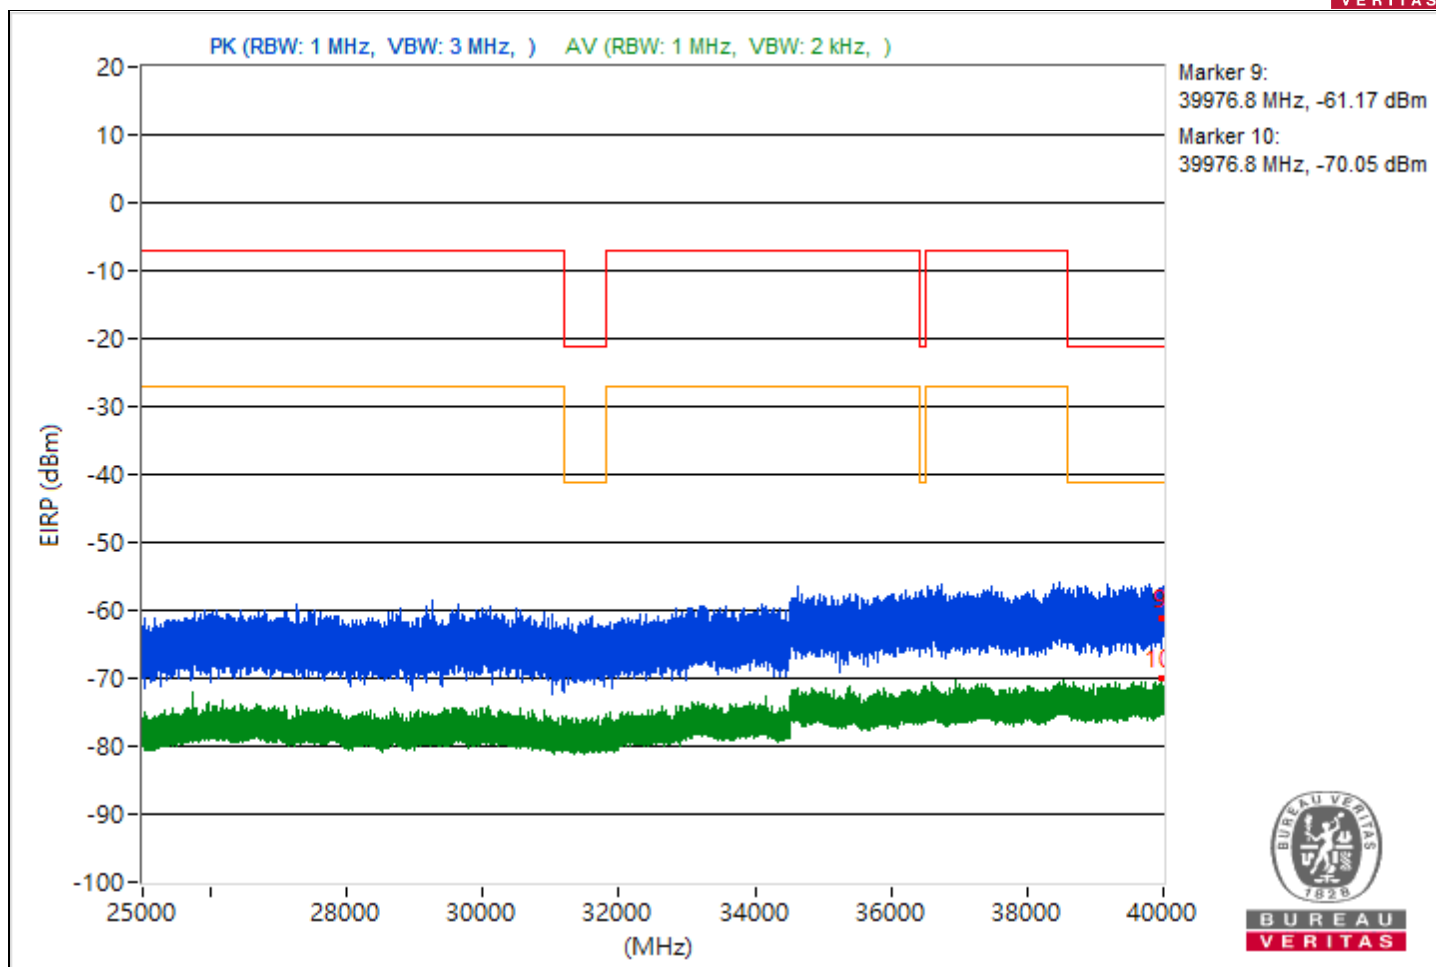


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.3	37.07 PK	74	-36.93	-68.51	-70.97	8.37	-58.19
2	5451.3	28.84 AV	54	-25.16	-76.85	-79.01	8.37	-66.42
3	7265.93	37.59 PK	74	-36.41	-68.45	-69.75	8.37	-57.67
4	7265.93	28.22 AV	54	-25.78	-78.67	-78.18	8.37	-67.04
5	21125.8	37.7 PK	74	-36.3	-68.61	-69.29	8.37	-57.56
6	21125.8	27.86 AV	54	-26.14	-80.83	-77.39	8.37	-67.4
7	23960.4	41.08 PK	74	-32.92	-65.18	-65.97	8.37	-54.18
8	23960.4	29.4 AV	54	-24.6	-76.04	-78.88	8.37	-65.86
9	39938.84	35.56 PK	74	-38.44	-70.02	-72.47	8.37	-59.7
10	39938.84	23.97 AV	54	-30.03	-81.79	-83.79	8.37	-71.29

Note: Margin value = Emission Level - Limit value

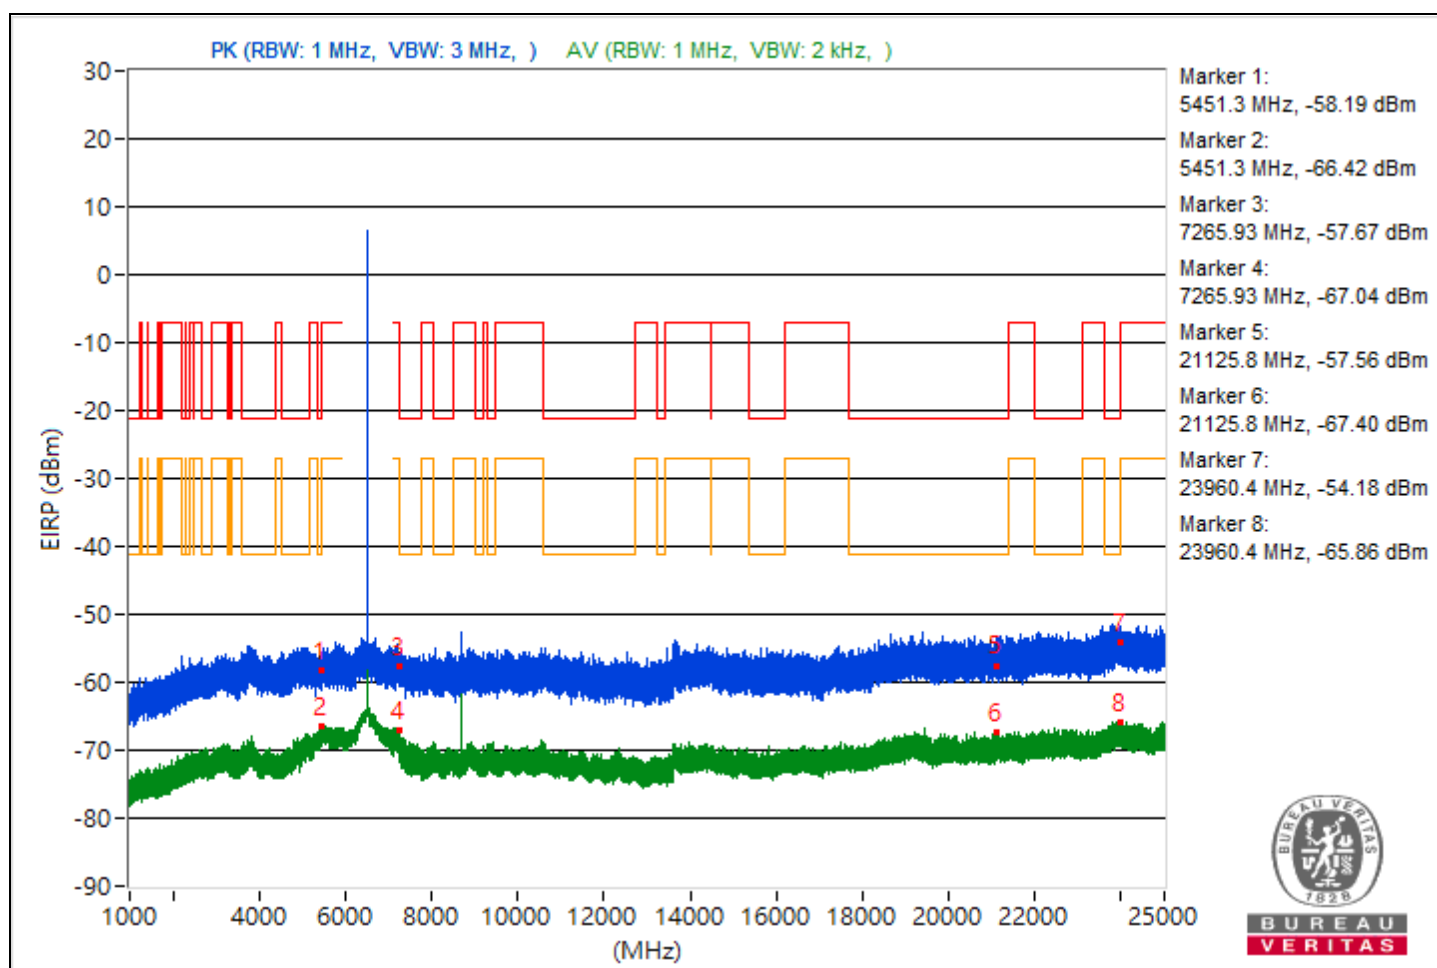


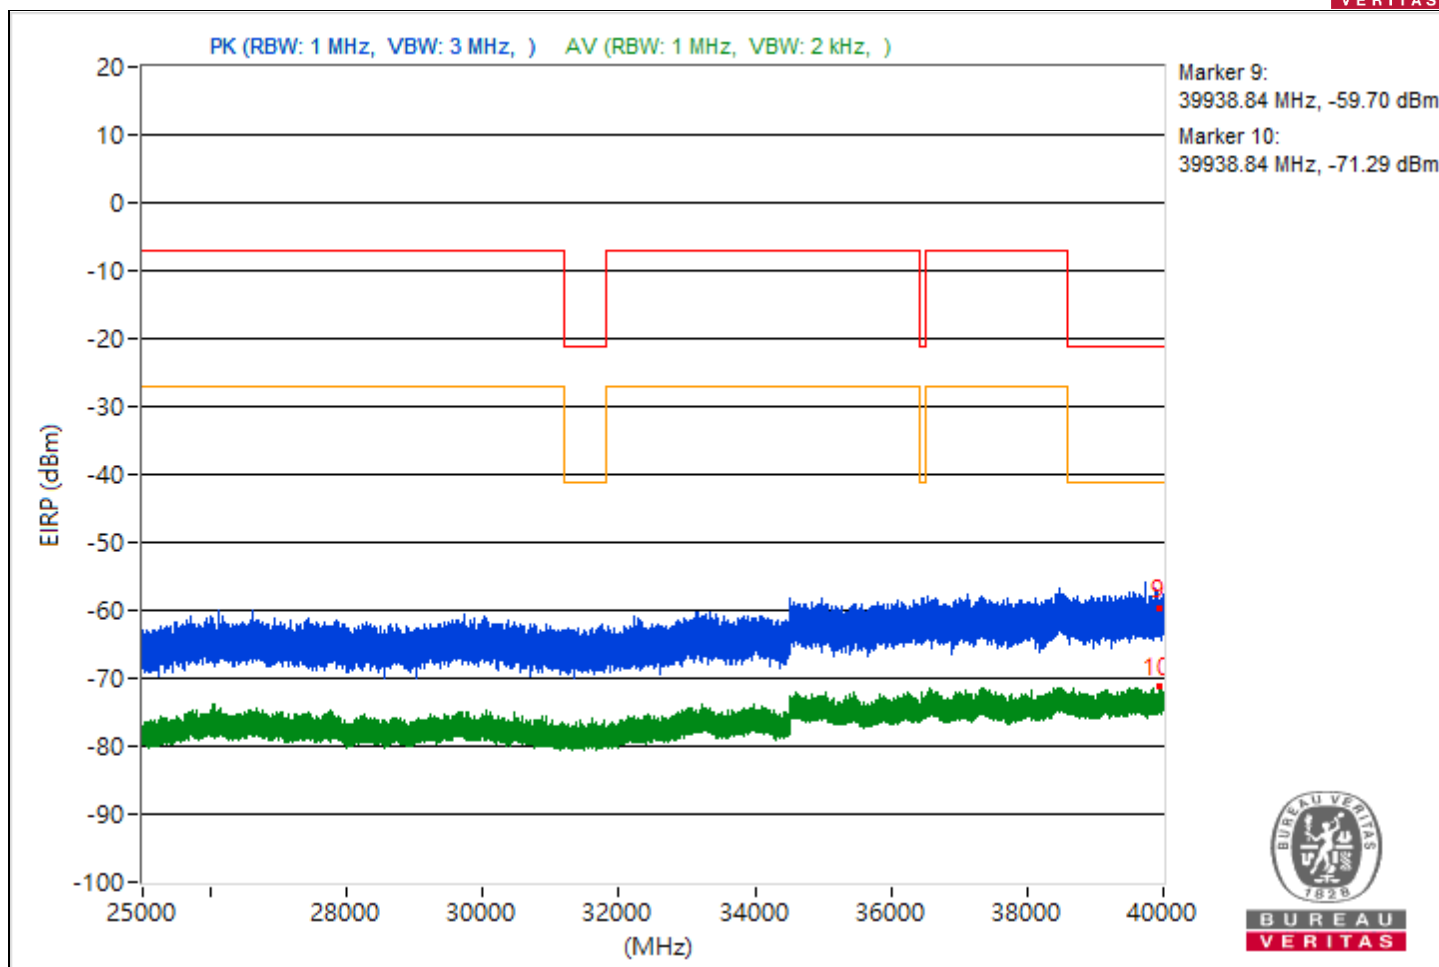

RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.43	36.87 PK	74	-37.13	-69.77	-69.77	8.37	-58.39
2	5456.43	28.71 AV	54	-25.29	-77.93	-77.93	8.37	-66.55
3	7257.22	36.33 PK	74	-37.67	-70.31	-70.31	8.37	-58.93
4	7257.22	28.61 AV	54	-25.39	-78.03	-78.03	8.37	-66.65
5	18709.7	38.56 PK	74	-35.44	-68.08	-68.08	8.37	-56.7
6	18709.7	28.84 AV	54	-25.16	-77.8	-77.8	8.37	-66.42
7	23939.7	39.37 PK	74	-34.63	-67.27	-67.27	8.37	-55.89
8	23939.7	30.56 AV	54	-23.44	-76.08	-76.08	8.37	-64.7
9	39545.87	33.47 PK	74	-40.53	-73.17	-73.17	8.37	-61.79
10	39545.87	25.05 AV	54	-28.95	-81.59	-81.59	8.37	-70.21

Note: Margin value = Emission Level - Limit value

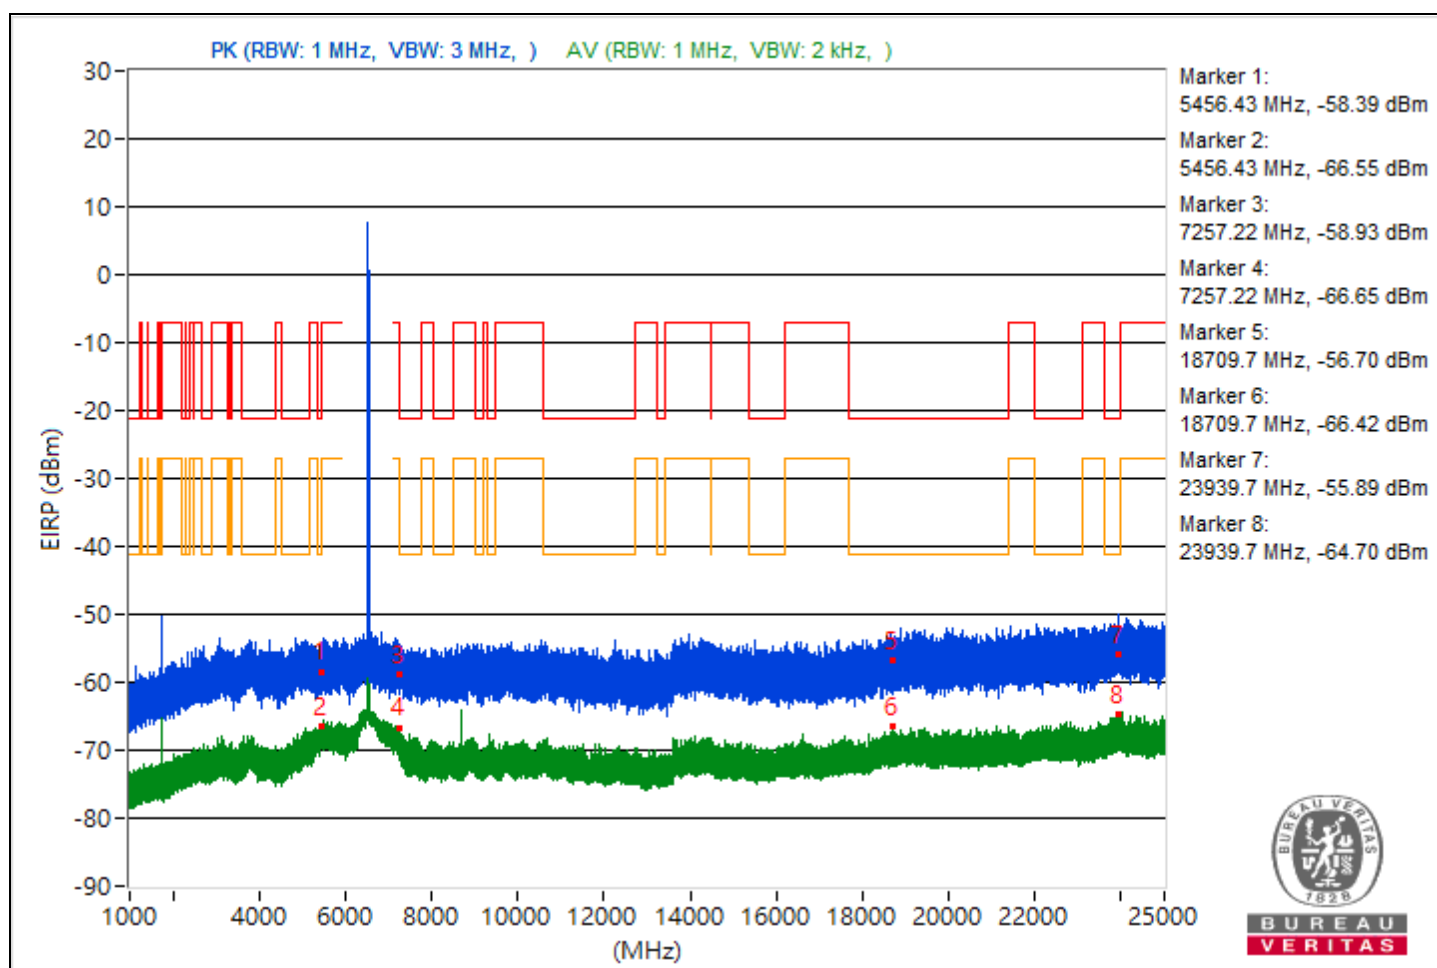





RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.14	38.3 PK	74	-35.7	-69.13	-67.68	8.37	-56.96
2	5458.14	28.75 AV	54	-25.25	-78.38	-77.44	8.37	-66.51
3	9166.67	42.29 PK	74	-31.71	-62.21	-68.73	8.37	-52.97
4	9166.67	34.66 AV	54	-19.34	-69.43	-78.98	8.37	-60.6
5	20335.4	37.94 PK	74	-36.06	-70.4	-67.48	8.37	-57.32
6	20335.4	27.68 AV	54	-26.32	-77.55	-81.06	8.37	-67.58
7	23870.4	39.35 PK	74	-34.65	-66.85	-67.78	8.37	-55.91
8	23870.4	29.2 AV	54	-24.8	-75.67	-80.46	8.37	-66.06
9	39612.71	34.04 PK	74	-39.96	-71.36	-74.33	8.37	-61.22
10	39612.71	23.69 AV	54	-30.31	-85.73	-81.27	8.37	-71.57

Note: Margin value = Emission Level - Limit value

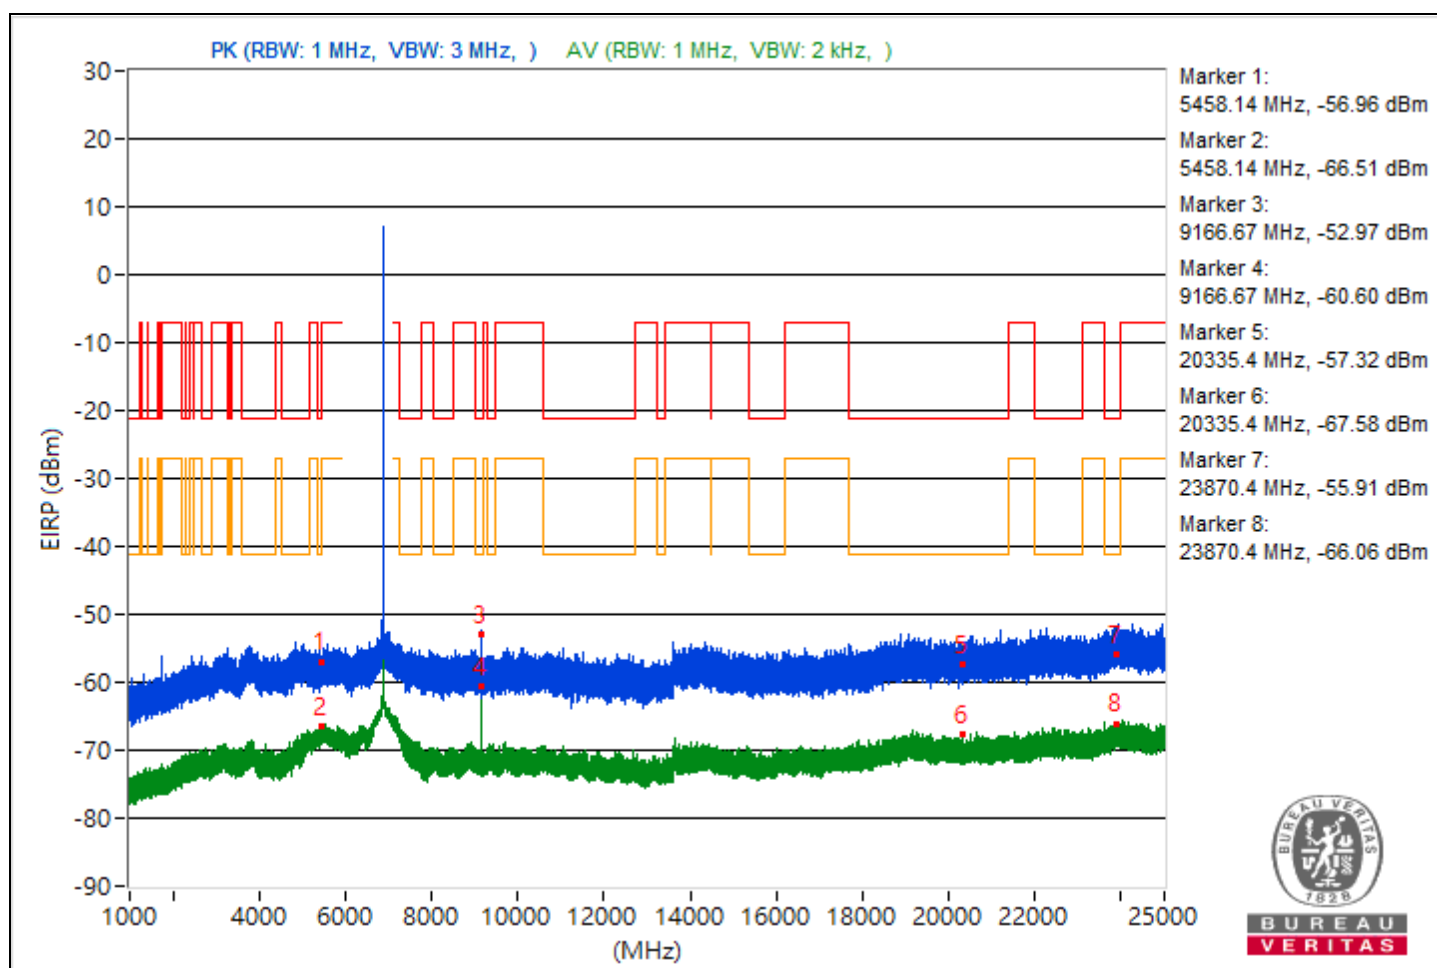


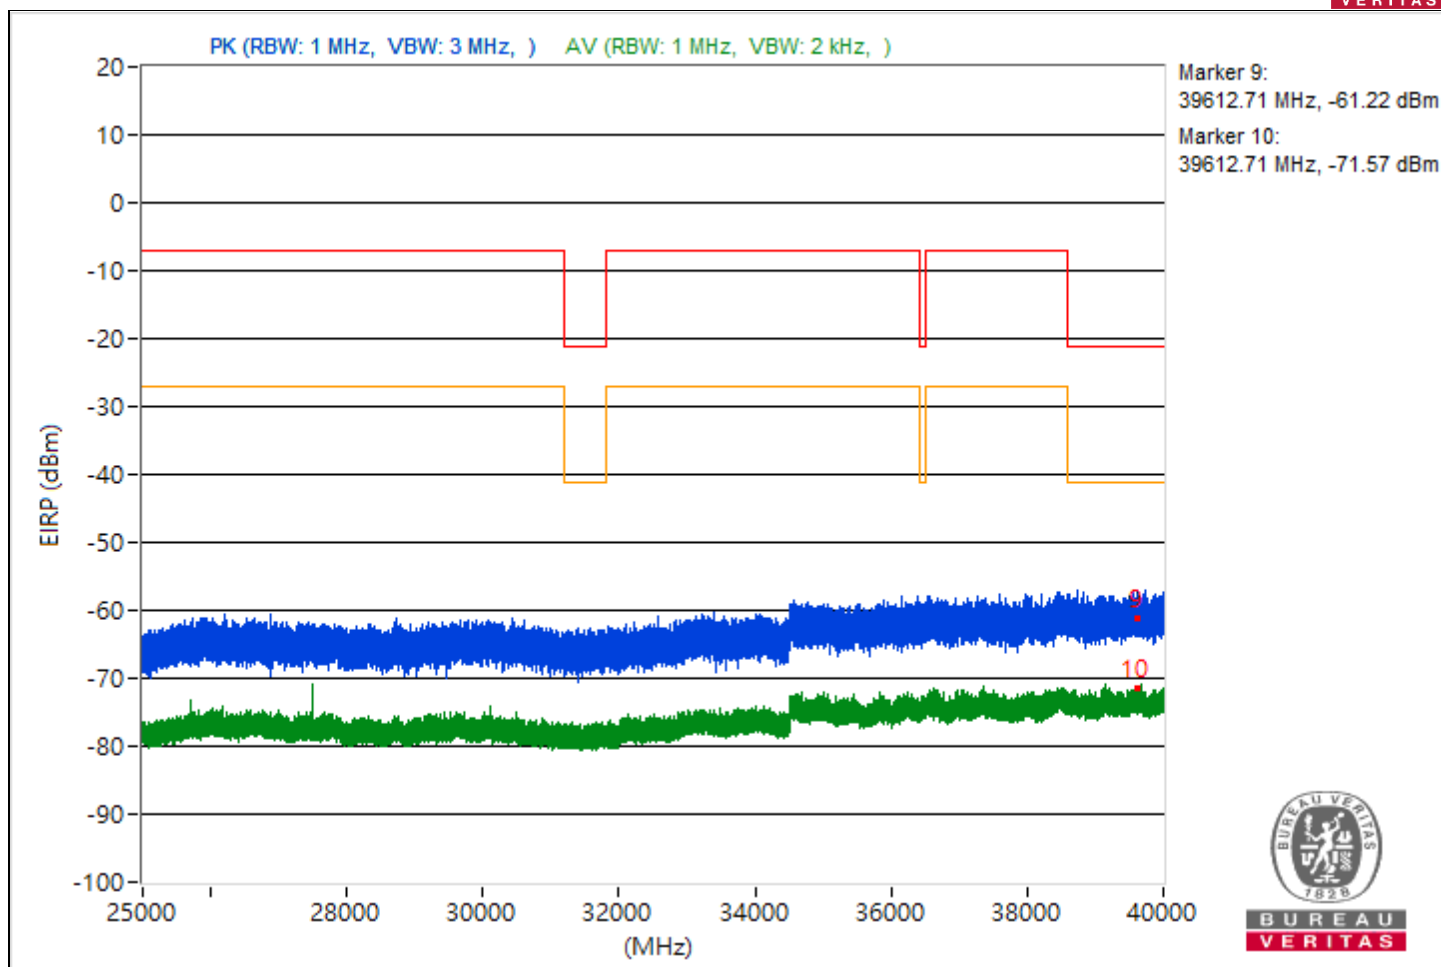


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5437.22	35.91 PK	74	-38.09	-70.73	-70.73	8.37	-59.35
2	5437.22	28.51 AV	54	-25.49	-78.13	-78.13	8.37	-66.75
3	7250.84	40.95 PK	74	-33.05	-65.69	-65.69	8.37	-54.31
4	7250.84	30.41 AV	54	-23.59	-76.23	-76.23	8.37	-64.85
5	20246	39.14 PK	74	-34.86	-67.5	-67.5	8.37	-56.12
6	20246	28.98 AV	54	-25.02	-77.66	-77.66	8.37	-66.28
7	23976.7	41.14 PK	74	-32.86	-65.5	-65.5	8.37	-54.12
8	23976.7	30.46 AV	54	-23.54	-76.18	-76.18	8.37	-64.8
9	39159.56	32.18 PK	74	-41.82	-74.46	-74.46	8.37	-63.08
10	39159.56	25.22 AV	54	-28.78	-81.42	-81.42	8.37	-70.04

Note: Margin value = Emission Level - Limit value

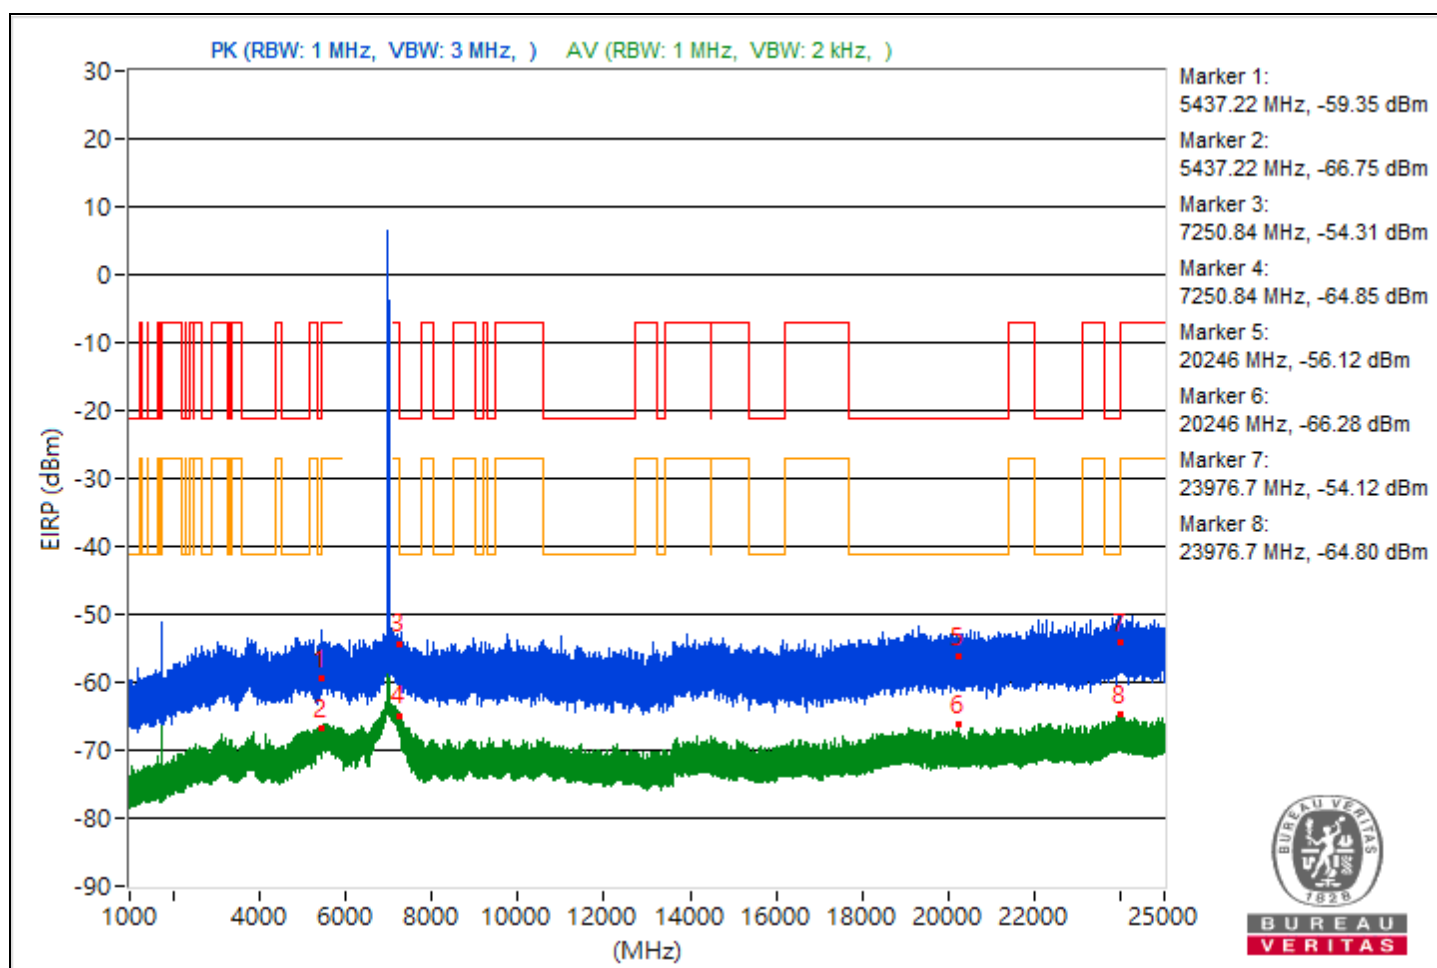


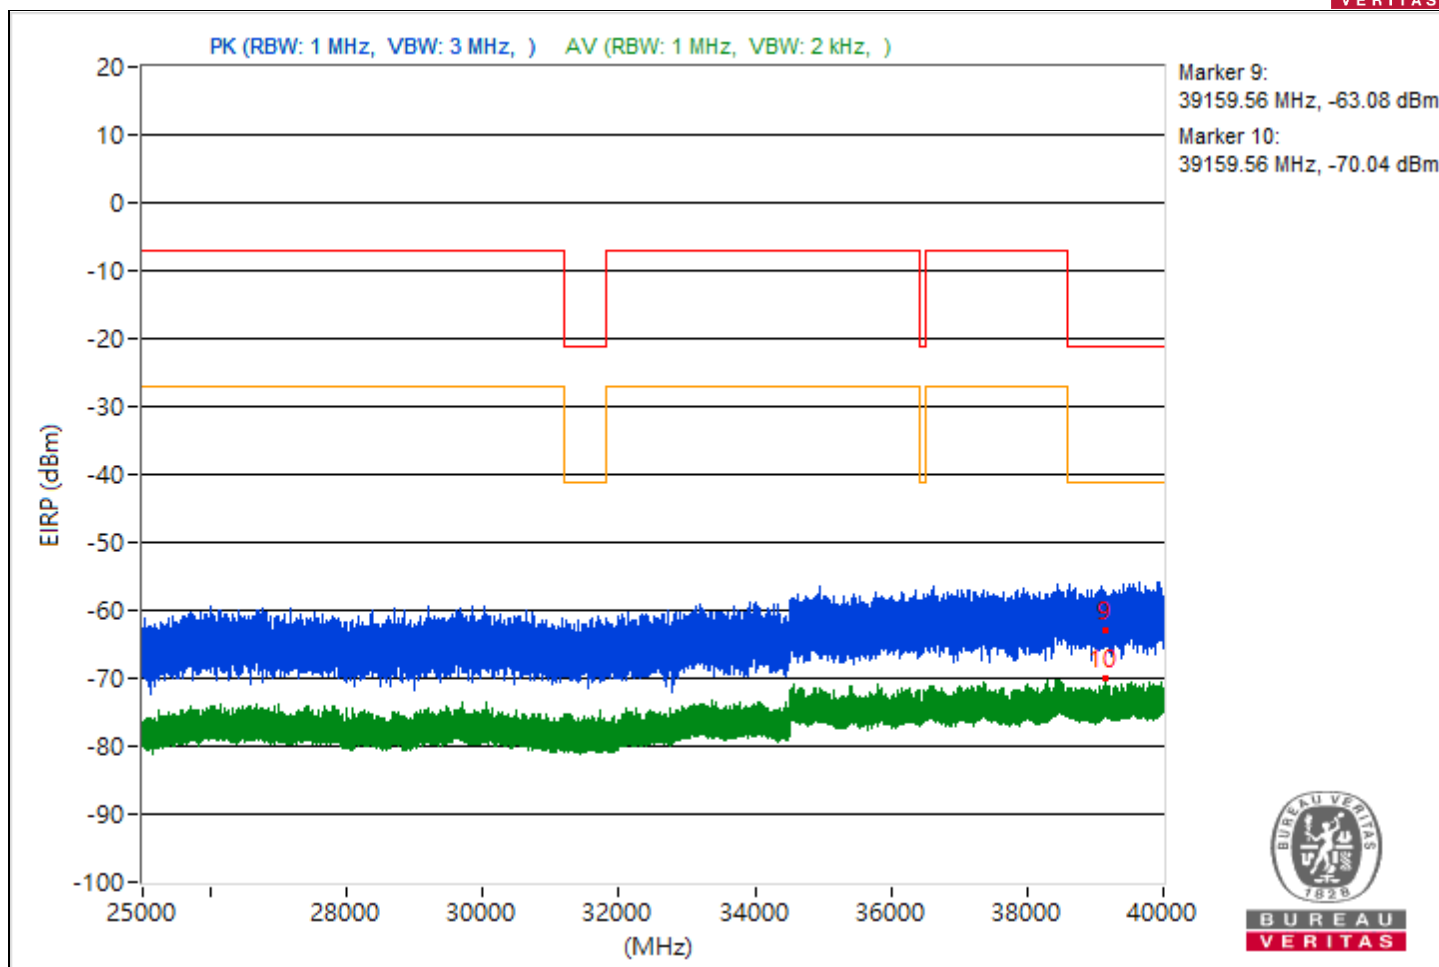


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5394.21	37.18 PK	74	-36.82	-69.73	-69.2	8.37	-58.08
2	5394.21	28.68 AV	54	-25.32	-77.68	-78.26	8.37	-66.58
3	7260.88	38.94 PK	74	-35.06	-68.25	-67.22	8.37	-56.32
4	7260.88	31.62 AV	54	-22.38	-76.08	-74.17	8.37	-63.64
5	20924.5	37.53 PK	74	-36.47	-67.86	-70.86	8.37	-57.73
6	20924.5	27.71 AV	54	-26.29	-77.65	-80.74	8.37	-67.55
7	23937	42.22 PK	74	-31.78	-64.49	-64.35	8.37	-53.04
8	23937	29.44 AV	54	-24.56	-78.93	-75.97	8.37	-65.82
9	38600.18	34.73 PK	74	-39.27	-71.97	-71.84	8.37	-60.53
10	38600.18	23.51 AV	54	-30.49	-81.52	-85.72	8.37	-71.75

Note: Margin value = Emission Level - Limit value

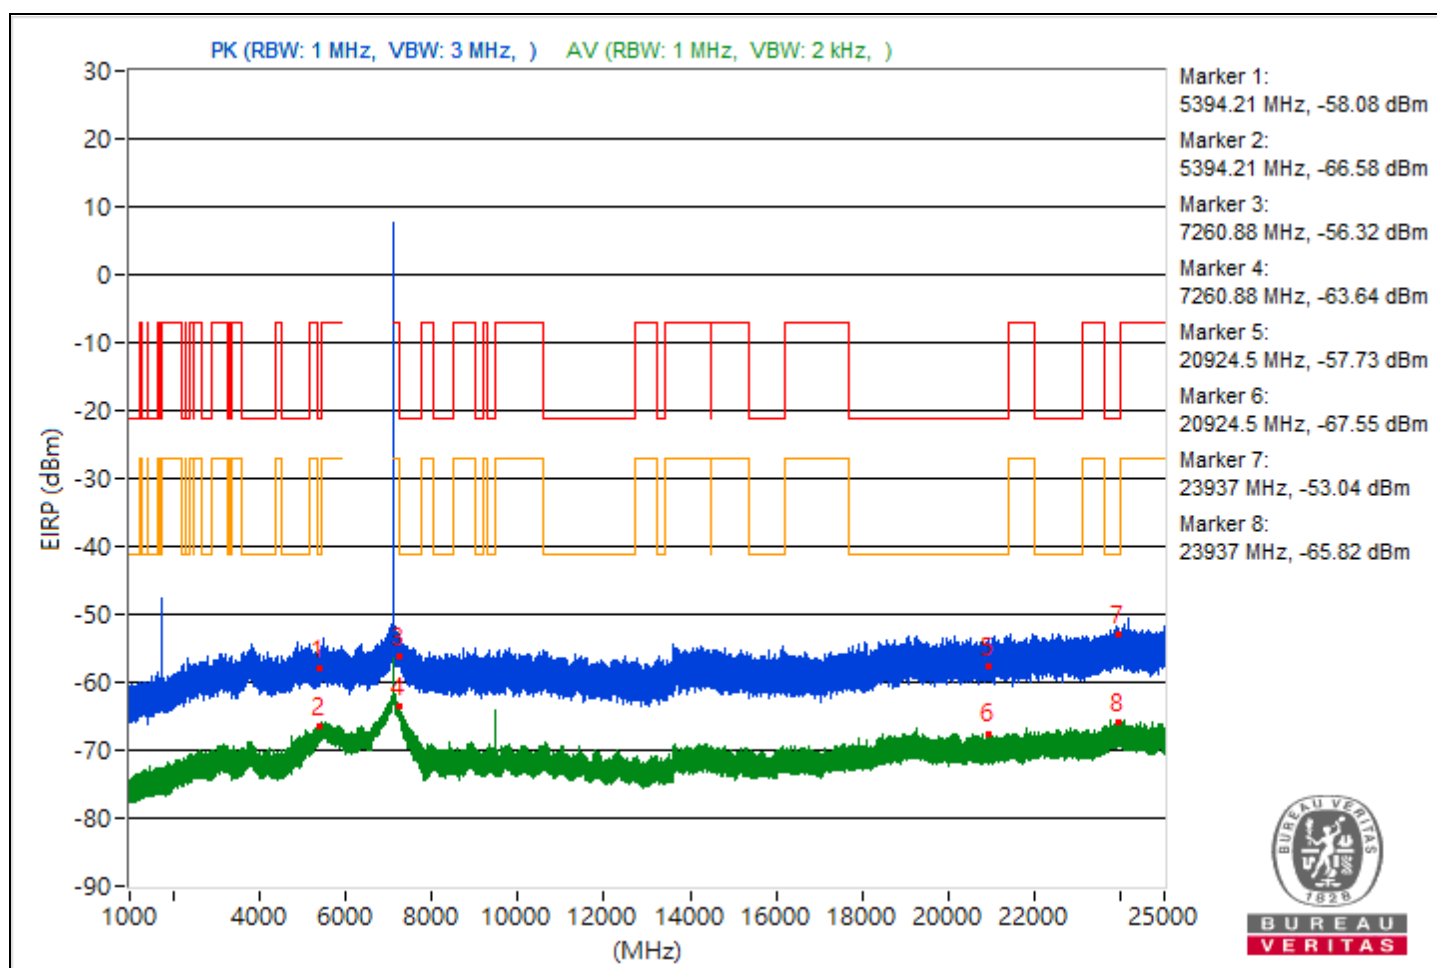

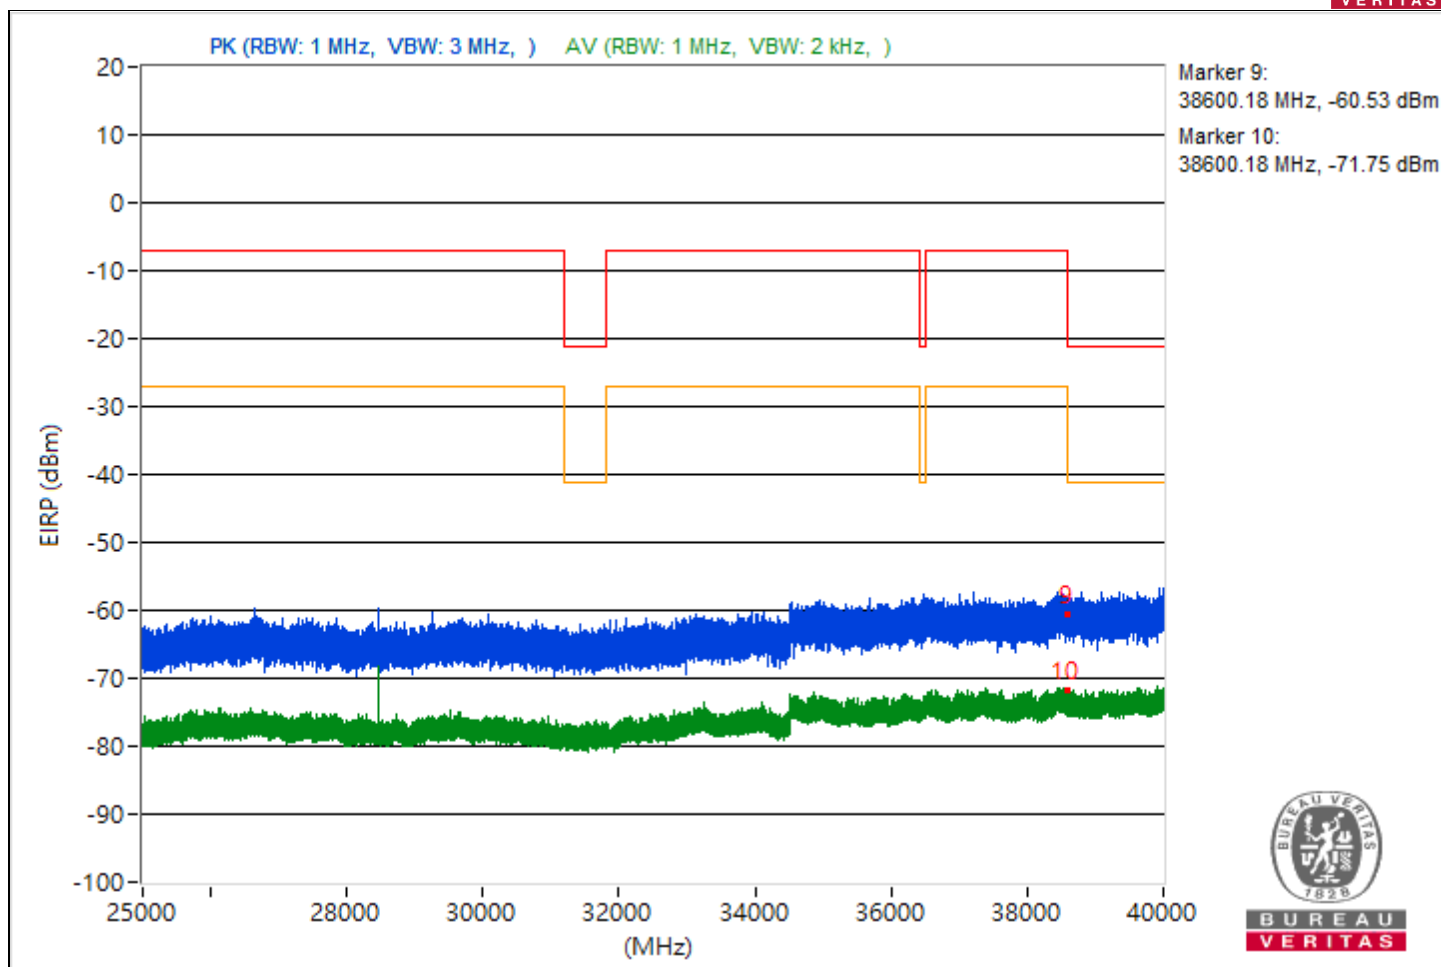



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.58	44.2 PK	74	-29.8	-62.03	-62.9	8.37	-51.06
2	5455.58	36.03 AV	54	-17.97	-70.9	-70.33	8.37	-59.23
3	#7980.01	49.47 PK	88.26	-38.79	-54.48	-65.64	8.37	-45.79
4	#7980.01	48.3 AV	68.26	-19.96	-55.42	-72.28	8.37	-46.96
5	21347.1	39.49 PK	74	-34.51	-66.67	-67.69	8.37	-55.77
6	21347.1	28.07 AV	54	-25.93	-77.64	-79.75	8.37	-67.19
7	23868.4	40.89 PK	74	-33.11	-66.94	-64.81	8.37	-54.37
8	23868.4	29.55 AV	54	-24.45	-77.84	-76.45	8.37	-65.71
9	39899.91	34.13 PK	74	-39.87	-71.32	-74.14	8.37	-61.13
10	39899.91	25.7 AV	54	-28.3	-79.61	-82.86	8.37	-69.56

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

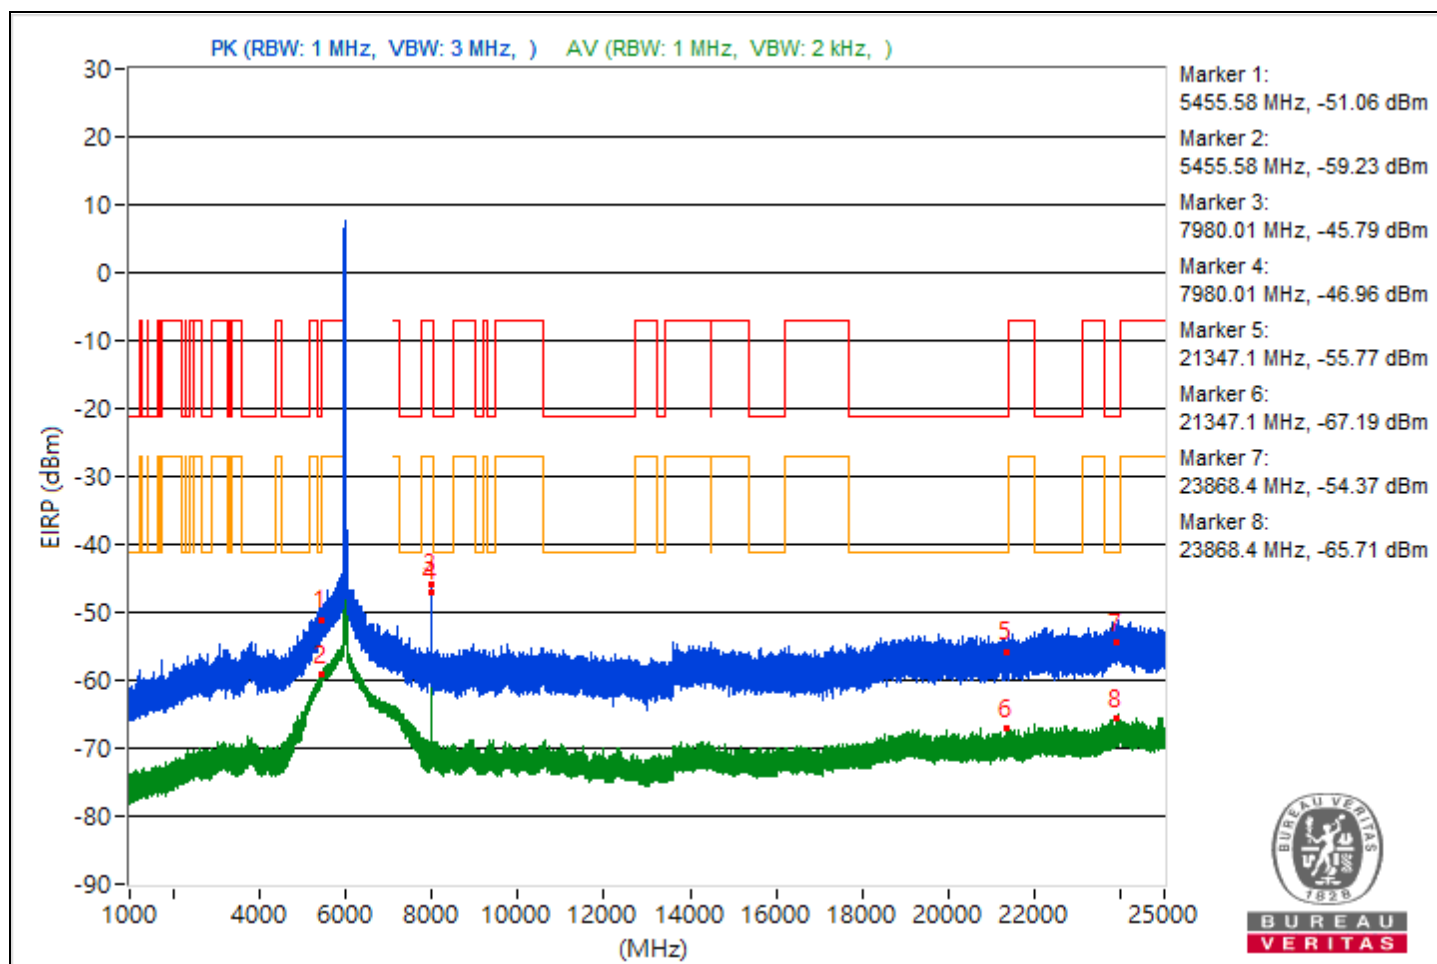

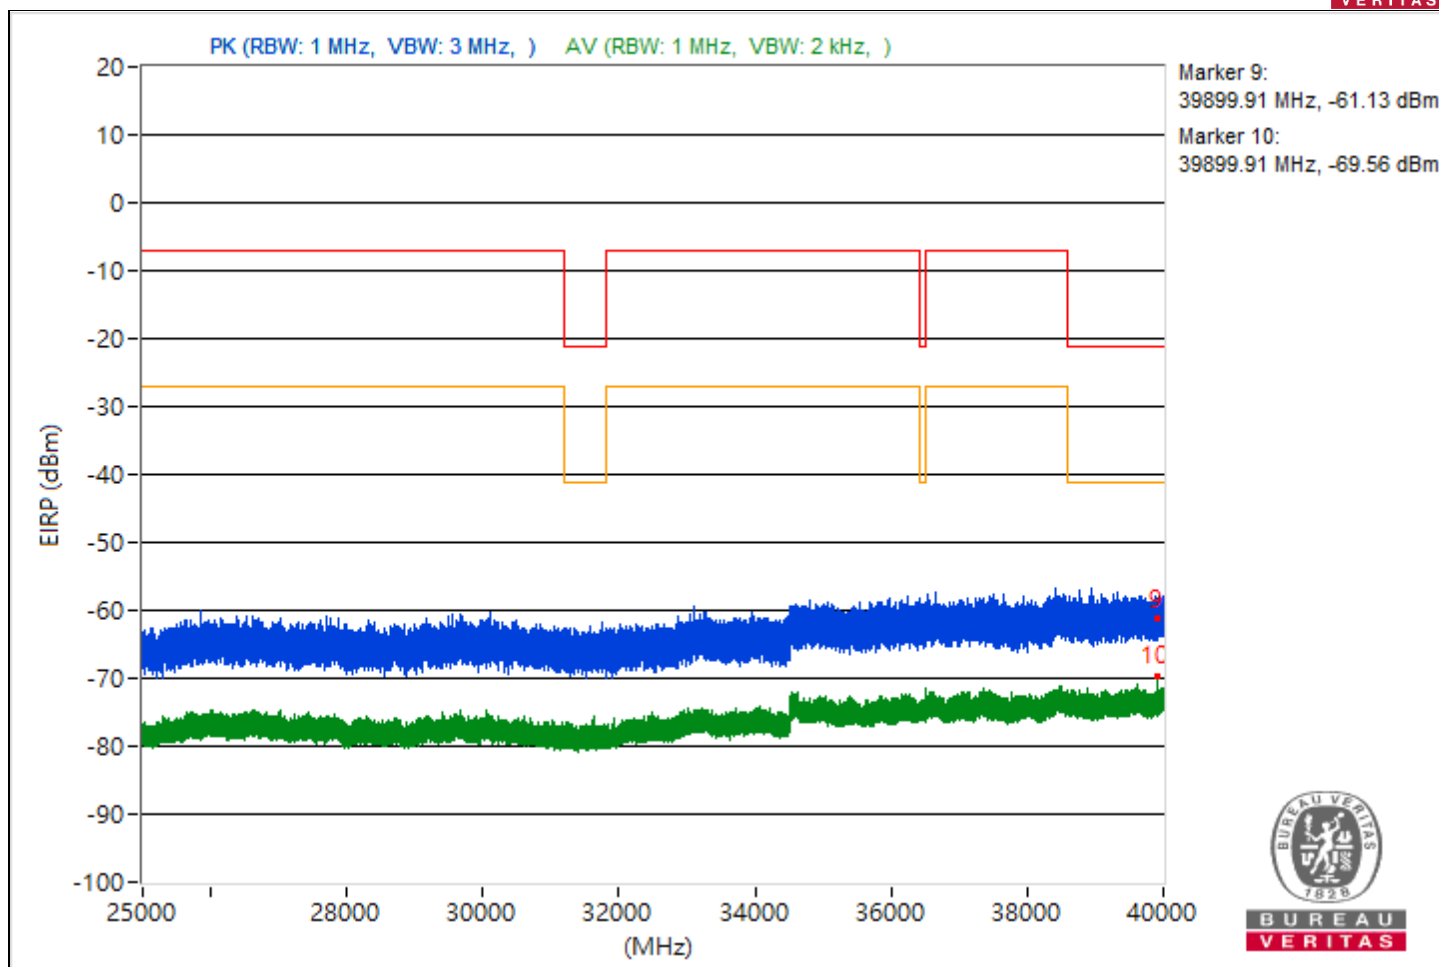



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.17	41.63 PK	74	-32.37	-64.86	-65.16	8.37	-53.63
2	5446.17	34.54 AV	54	-19.46	-72.89	-71.44	8.37	-60.72
3	7256.13	40.84 PK	74	-33.16	-67.05	-64.83	8.37	-54.42
4	7256.13	33.28 AV	54	-20.72	-73.21	-73.51	8.37	-61.98
5	21359	37.62 PK	74	-36.38	-69.26	-68.8	8.37	-57.64
6	21359	27.37 AV	54	-26.63	-77.76	-81.61	8.37	-67.89
7	23911.8	40.88 PK	74	-33.12	-67.5	-64.52	8.37	-54.38
8	23911.8	29.29 AV	54	-24.71	-75.68	-80.11	8.37	-65.97
9	39064	34.06 PK	74	-39.94	-71.41	-74.18	8.37	-61.2
10	39064	23.35 AV	54	-30.65	-81.83	-85.49	8.37	-71.91

Note: Margin value = Emission Level - Limit value

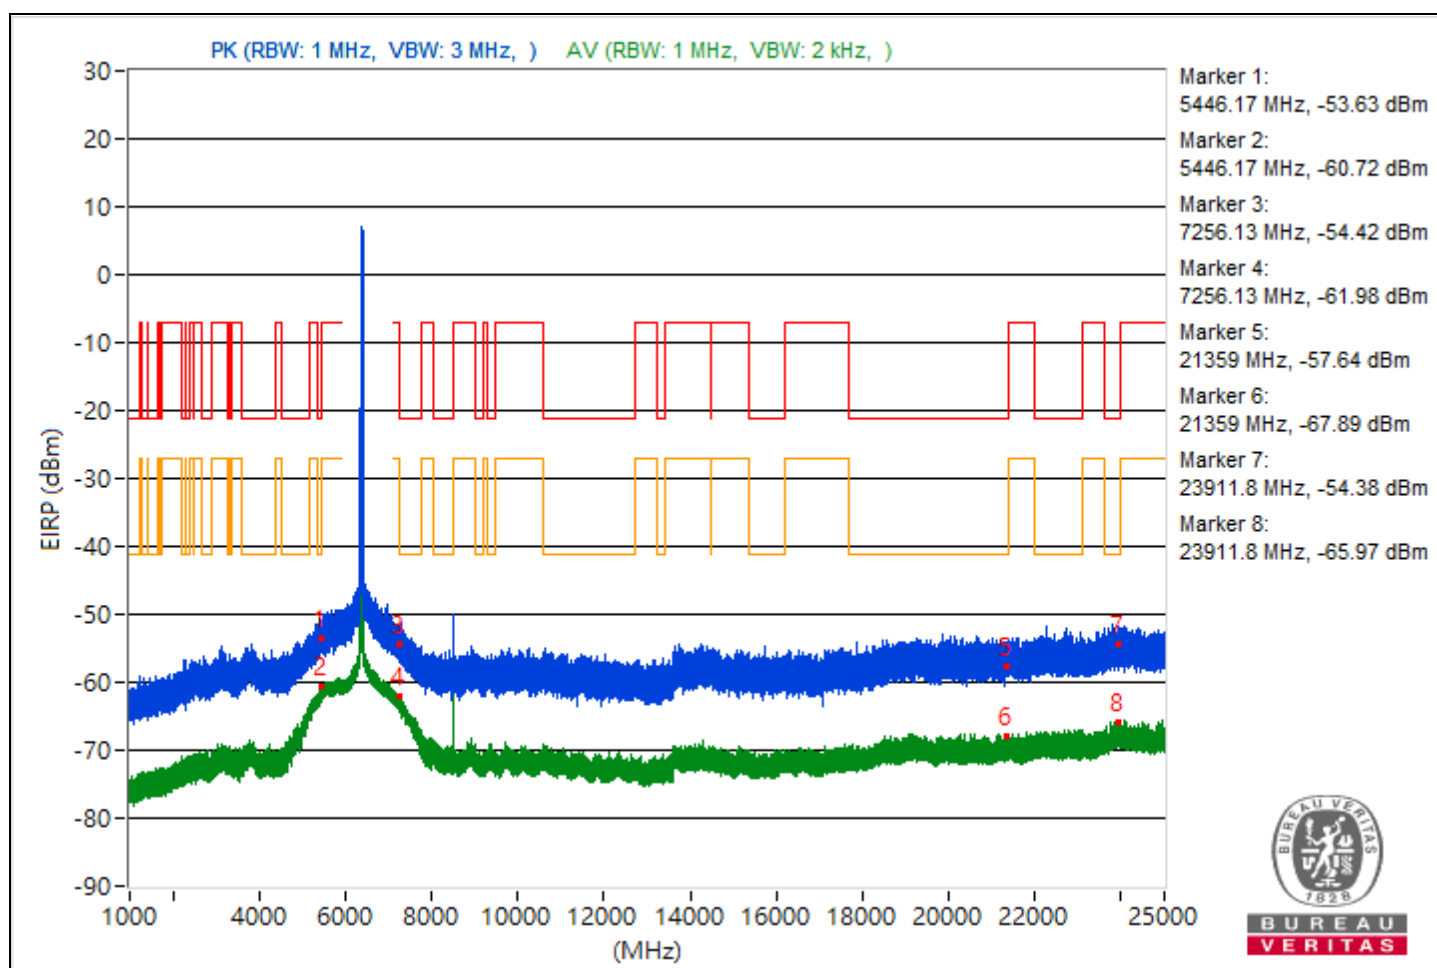


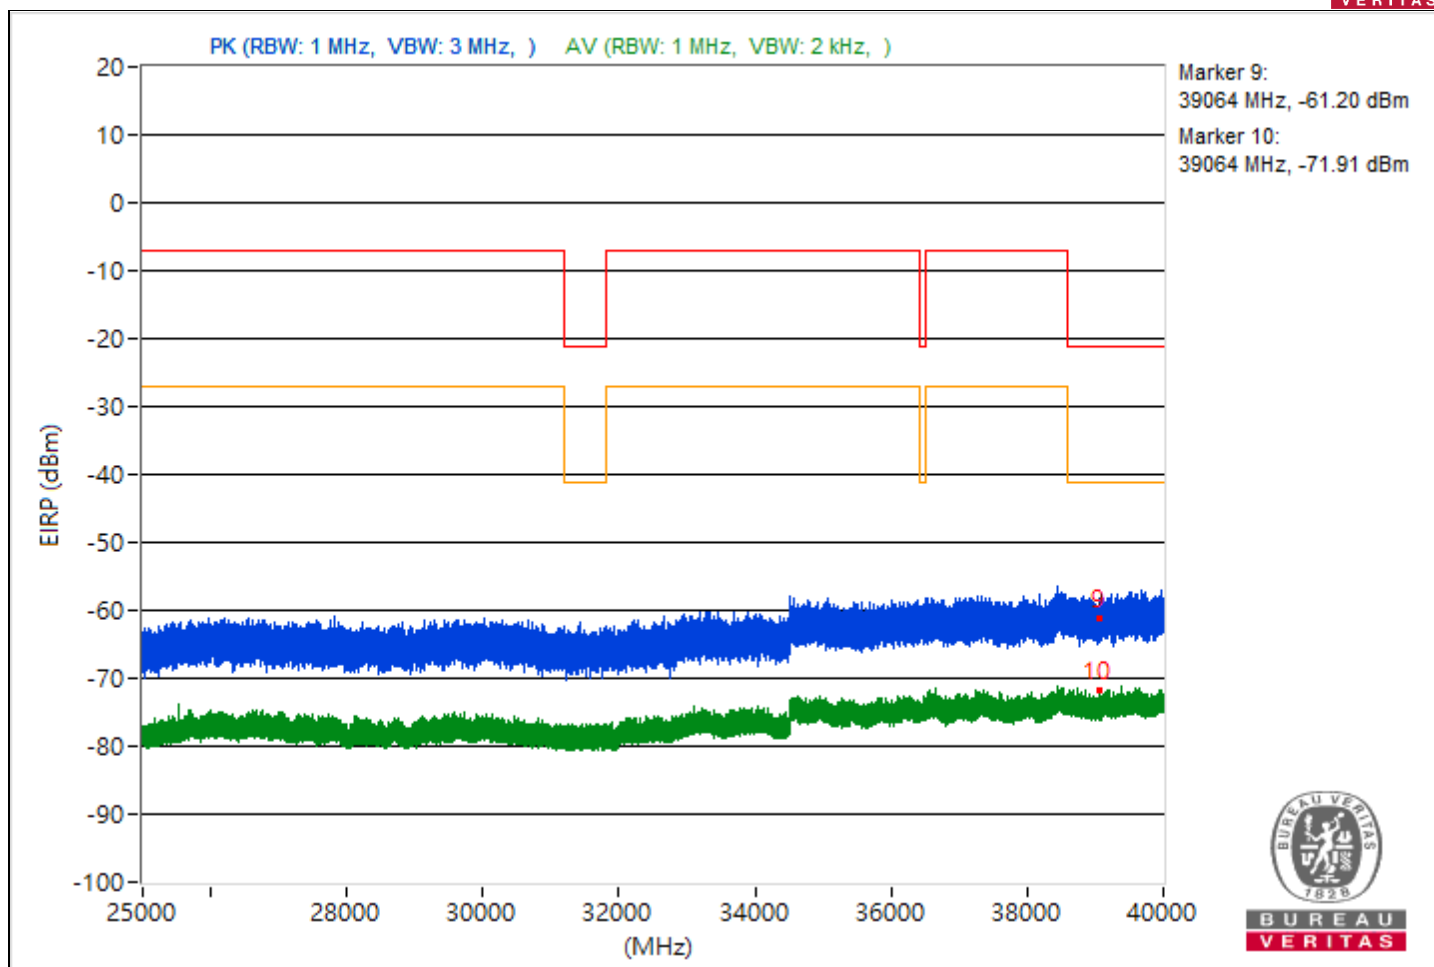


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5442.43	40.71 PK	74	-33.29	-65.05	-67.03	8.37	-54.55
2	5442.43	34.21 AV	54	-19.79	-72.7	-72.19	8.37	-61.05
3	7255.74	42.98 PK	74	-31.02	-63.51	-63.82	8.37	-52.28
4	7255.74	33.28 AV	54	-20.72	-72.69	-74.15	8.37	-61.98
5	21195	38.35 PK	74	-35.65	-67.71	-68.96	8.37	-56.91
6	21195	27.83 AV	54	-26.17	-77.31	-81.11	8.37	-67.43
7	23957.8	40.59 PK	74	-33.41	-66.64	-65.54	8.37	-54.67
8	23957.8	29.12 AV	54	-24.88	-75.92	-80.06	8.37	-66.14
9	39995.56	33.28 PK	74	-40.72	-72.25	-74.86	8.37	-61.98
10	39995.56	24.05 AV	54	-29.95	-85	-81.05	8.37	-71.21

Note: Margin value = Emission Level - Limit value

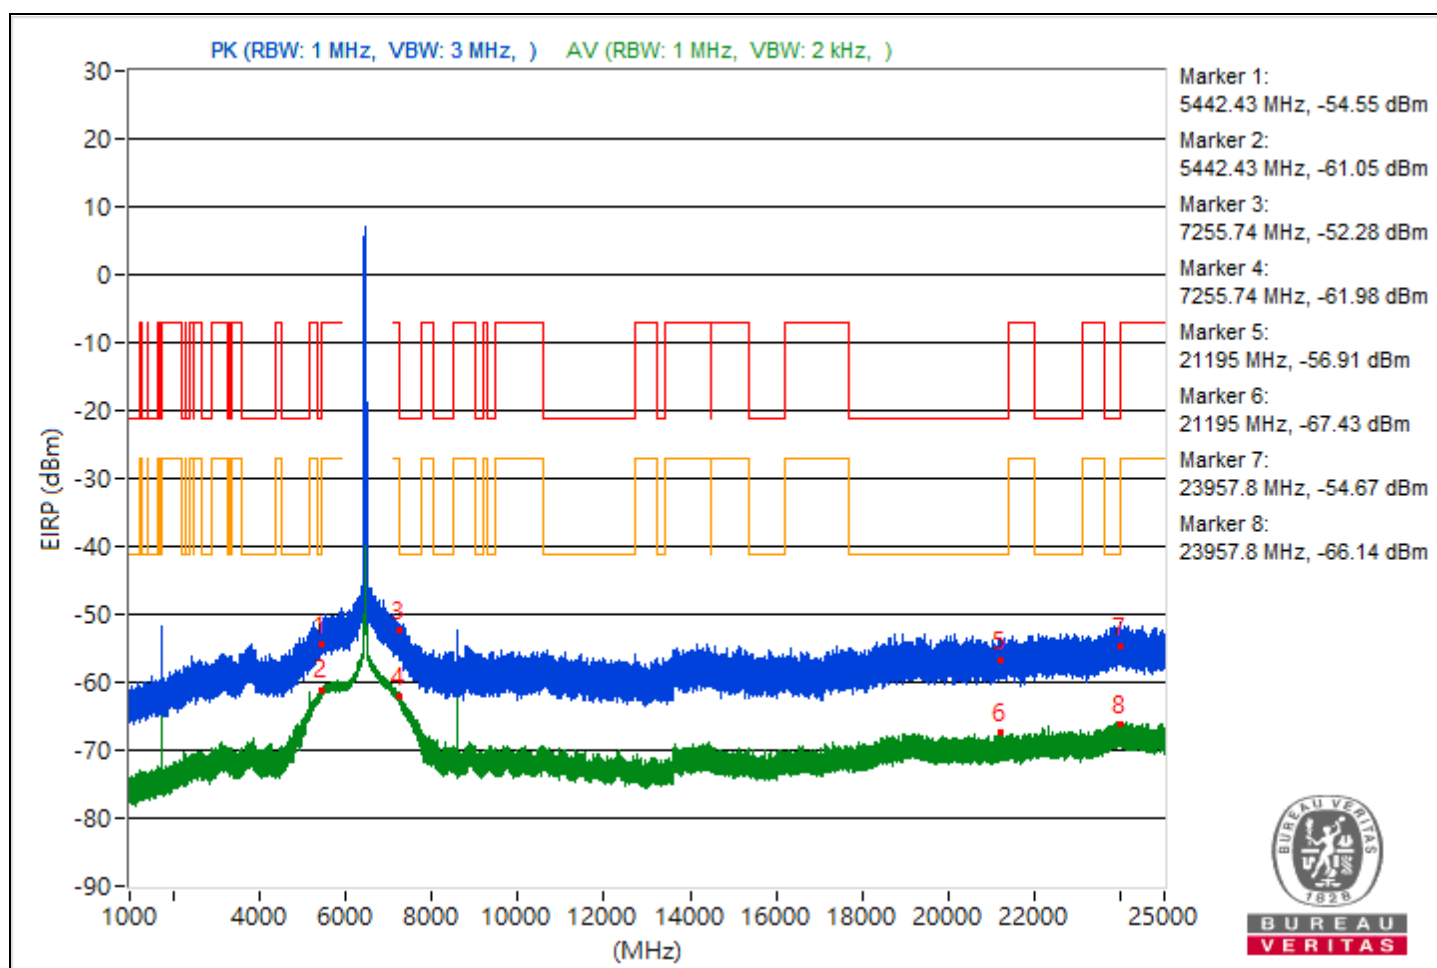


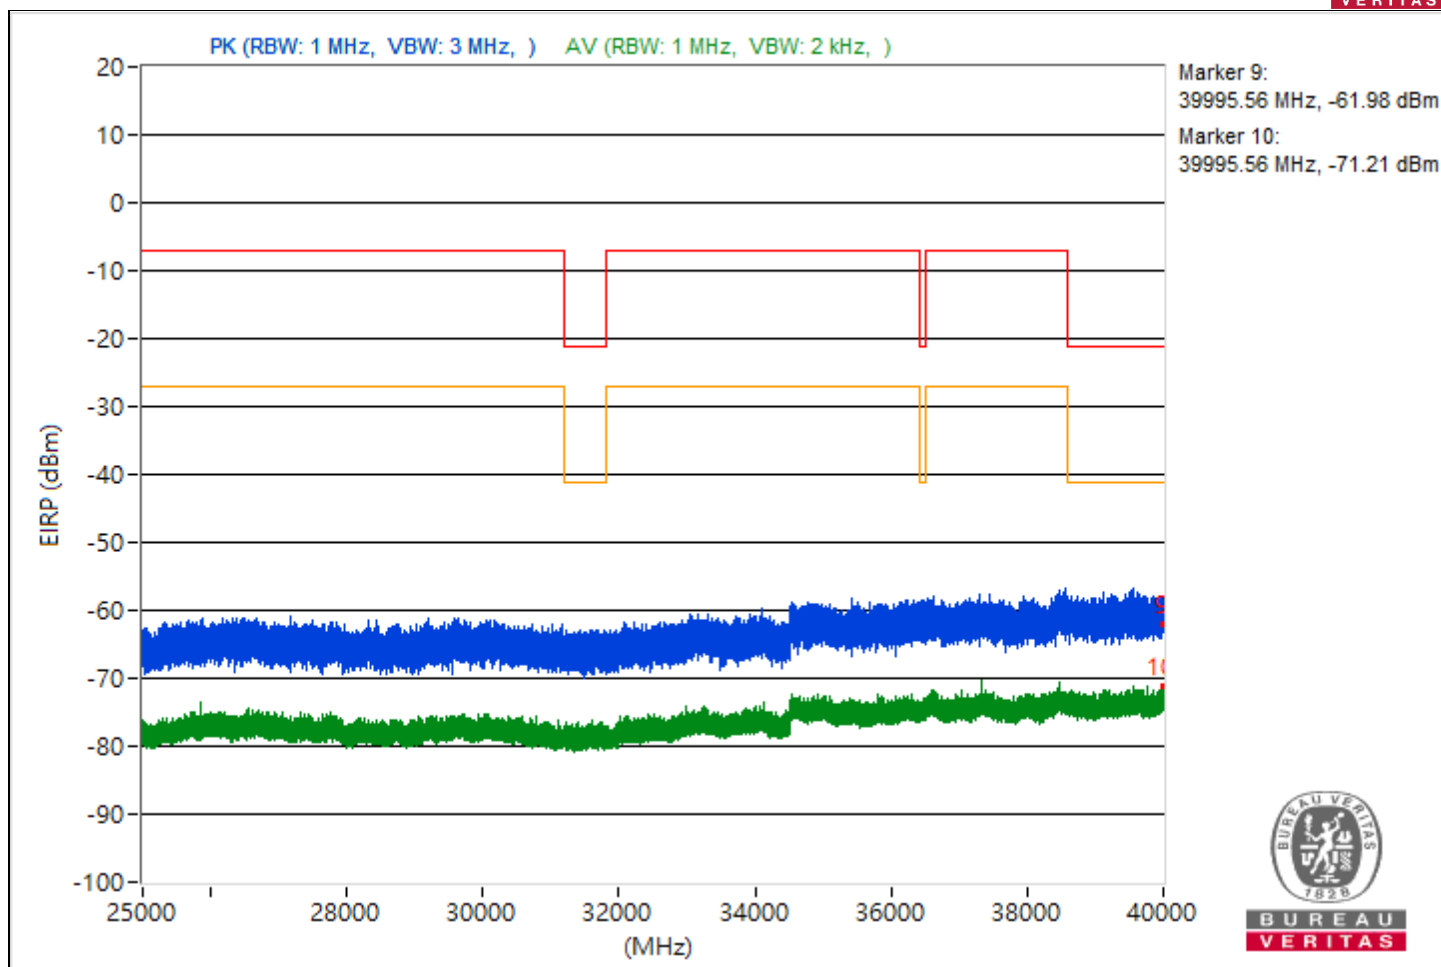


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.99	42.27 PK	74	-31.73	-66.08	-63.14	8.37	-52.99
2	5457.99	34.04 AV	54	-19.96	-72.37	-72.84	8.37	-61.22
3	7257.14	42.1 PK	74	-31.9	-63.04	-66.87	8.37	-53.16
4	7257.14	33.48 AV	54	-20.52	-72.38	-74.12	8.37	-61.78
5	21108.6	38.87 PK	74	-35.13	-68.54	-67.12	8.37	-56.39
6	21108.6	27.8 AV	54	-26.2	-76.98	-82.17	8.37	-67.46
7	23883.1	41.59 PK	74	-32.41	-66.39	-64.03	8.37	-53.67
8	23883.1	29.29 AV	54	-24.71	-79.77	-75.81	8.37	-65.97
9	39606.31	36.2 PK	74	-37.8	-74.34	-68.42	8.37	-59.06
10	39606.31	23.7 AV	54	-30.3	-85.89	-81.21	8.37	-71.56

Note: Margin value = Emission Level - Limit value

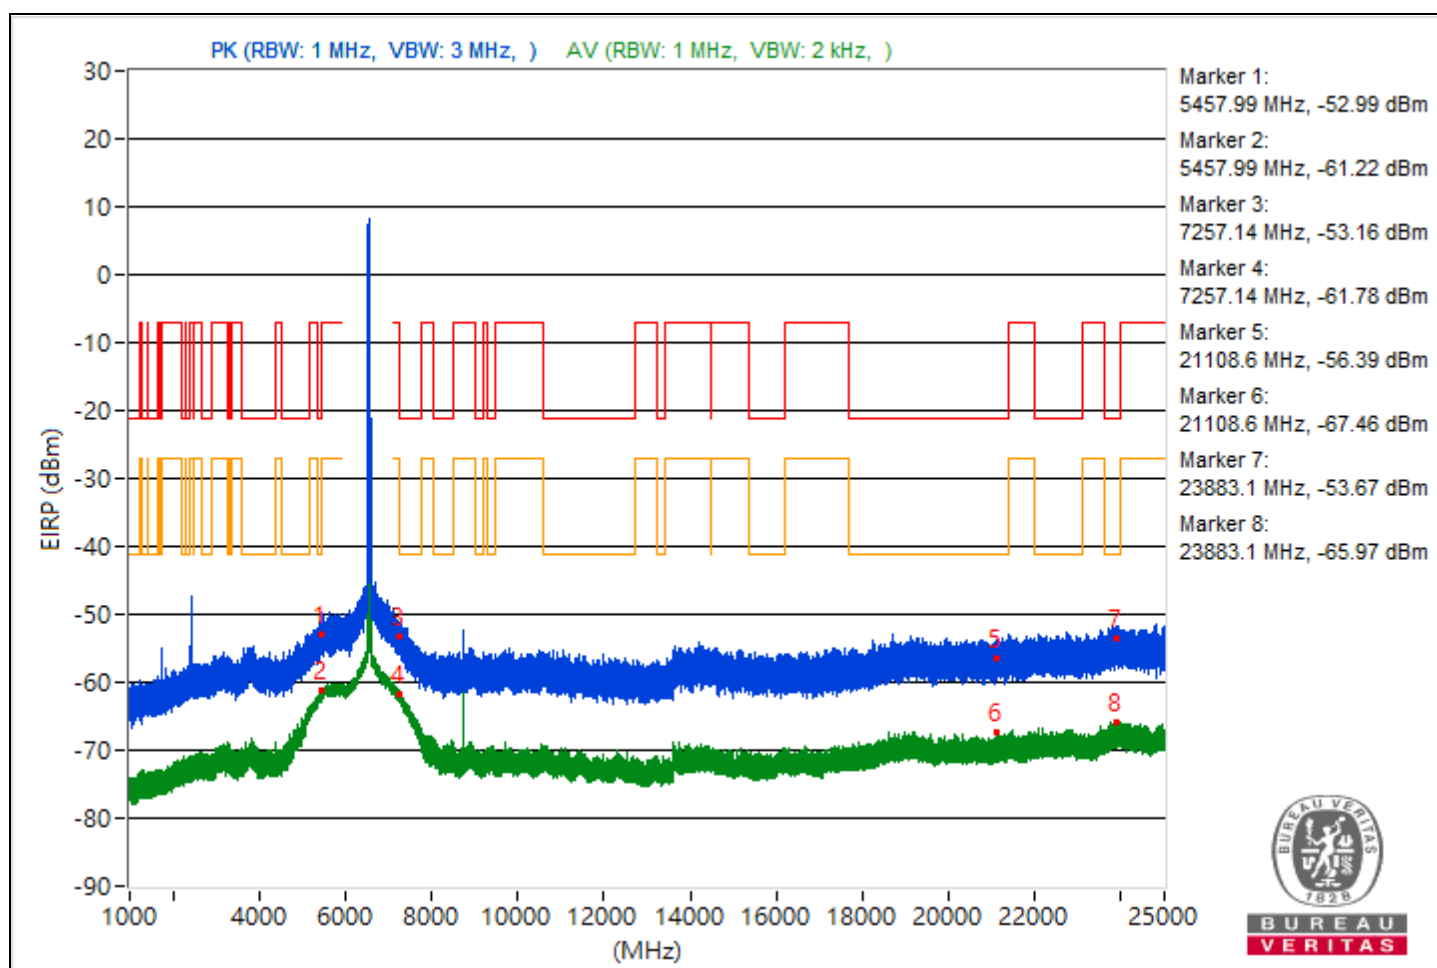


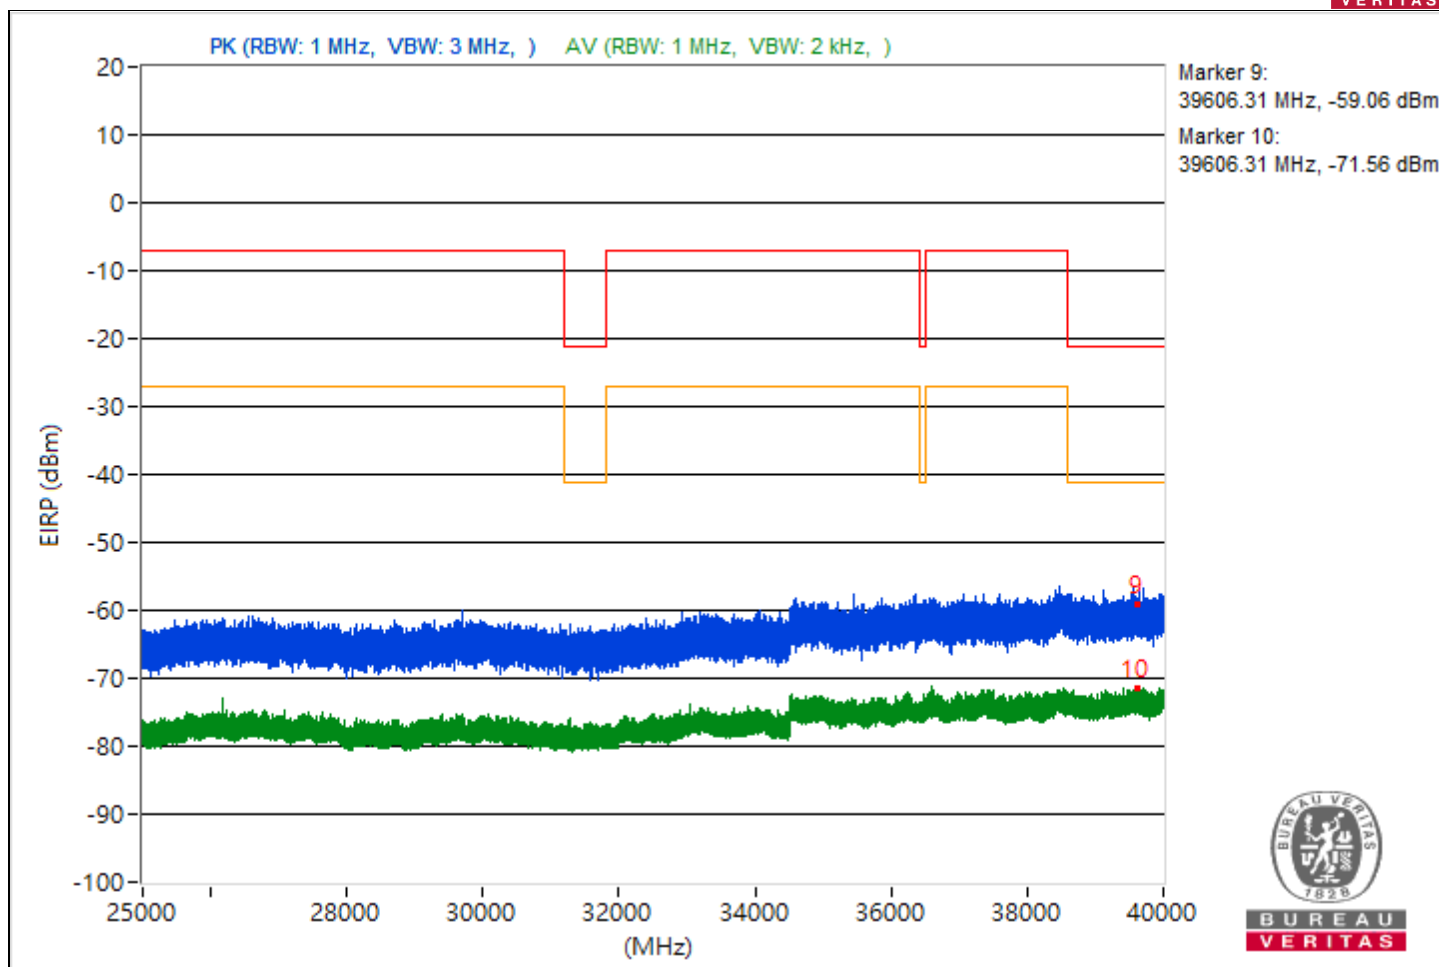


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.86	41.37 PK	74	-32.63	-65.98	-64.66	8.37	-53.89
2	5459.86	33.12 AV	54	-20.88	-73.29	-73.77	8.37	-62.14
3	7273.4	43.05 PK	74	-30.95	-62.4	-65.24	8.37	-52.21
4	7273.4	36.23 AV	54	-17.77	-70.66	-70.18	8.37	-59.03
5	21383.8	38.37 PK	74	-35.63	-69.78	-67.16	8.37	-56.89
6	21383.8	28.03 AV	54	-25.97	-77.63	-79.89	8.37	-67.23
7	23887.1	40.47 PK	74	-33.53	-66.38	-65.98	8.37	-54.79
8	23887.1	28.83 AV	54	-25.17	-79.42	-76.65	8.37	-66.43
9	39600.53	32.47 PK	74	-41.53	-73.33	-75.2	8.37	-62.79
10	39600.53	23.66 AV	54	-30.34	-81.63	-84.96	8.37	-71.6

Note: Margin value = Emission Level - Limit value

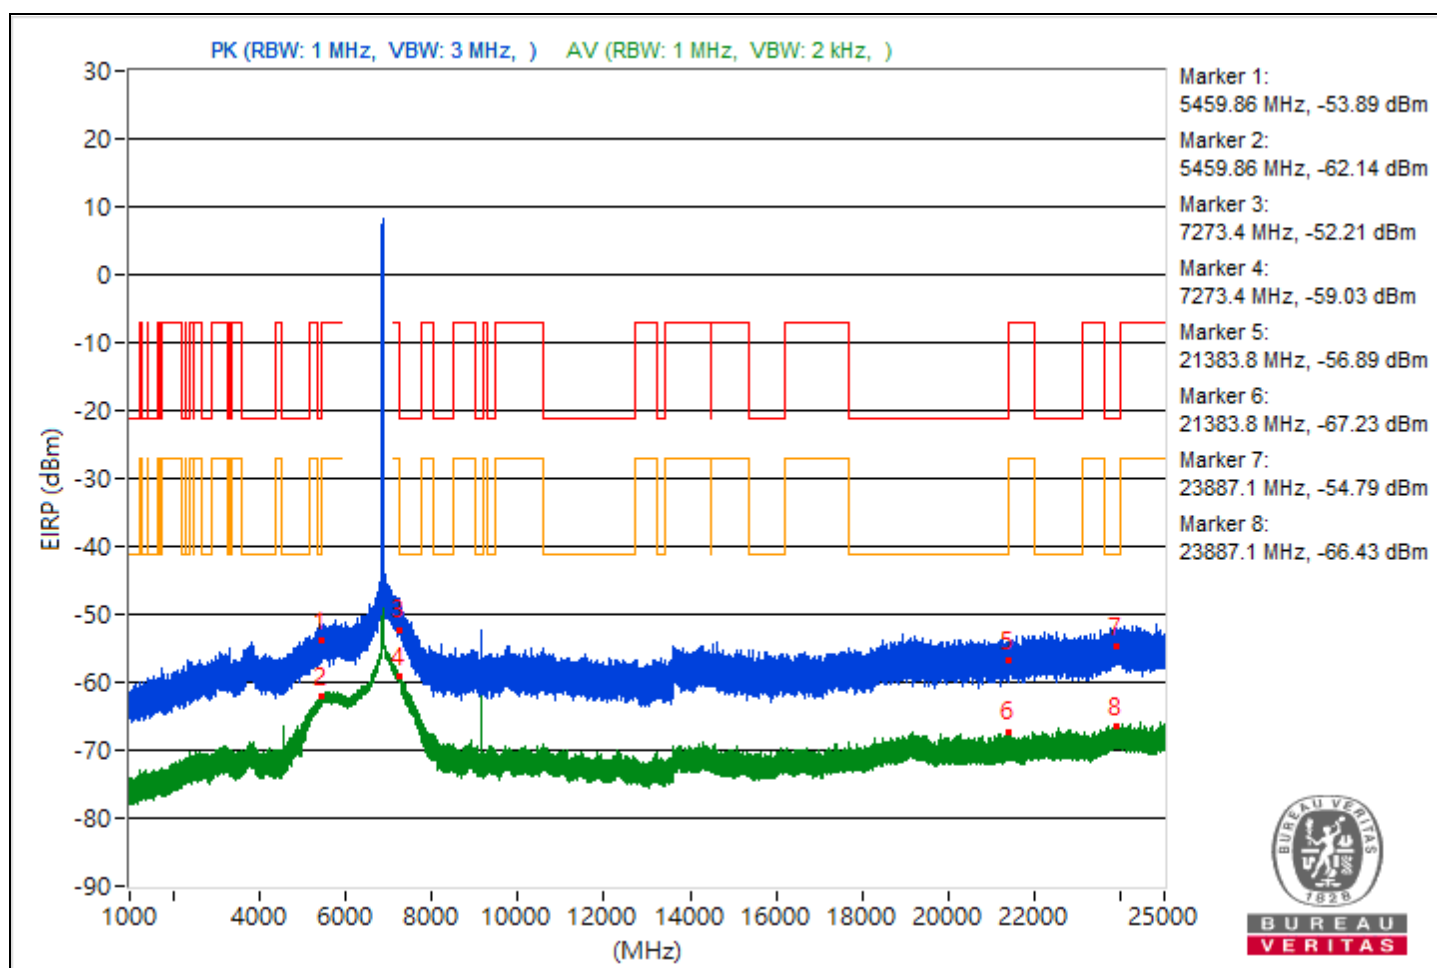

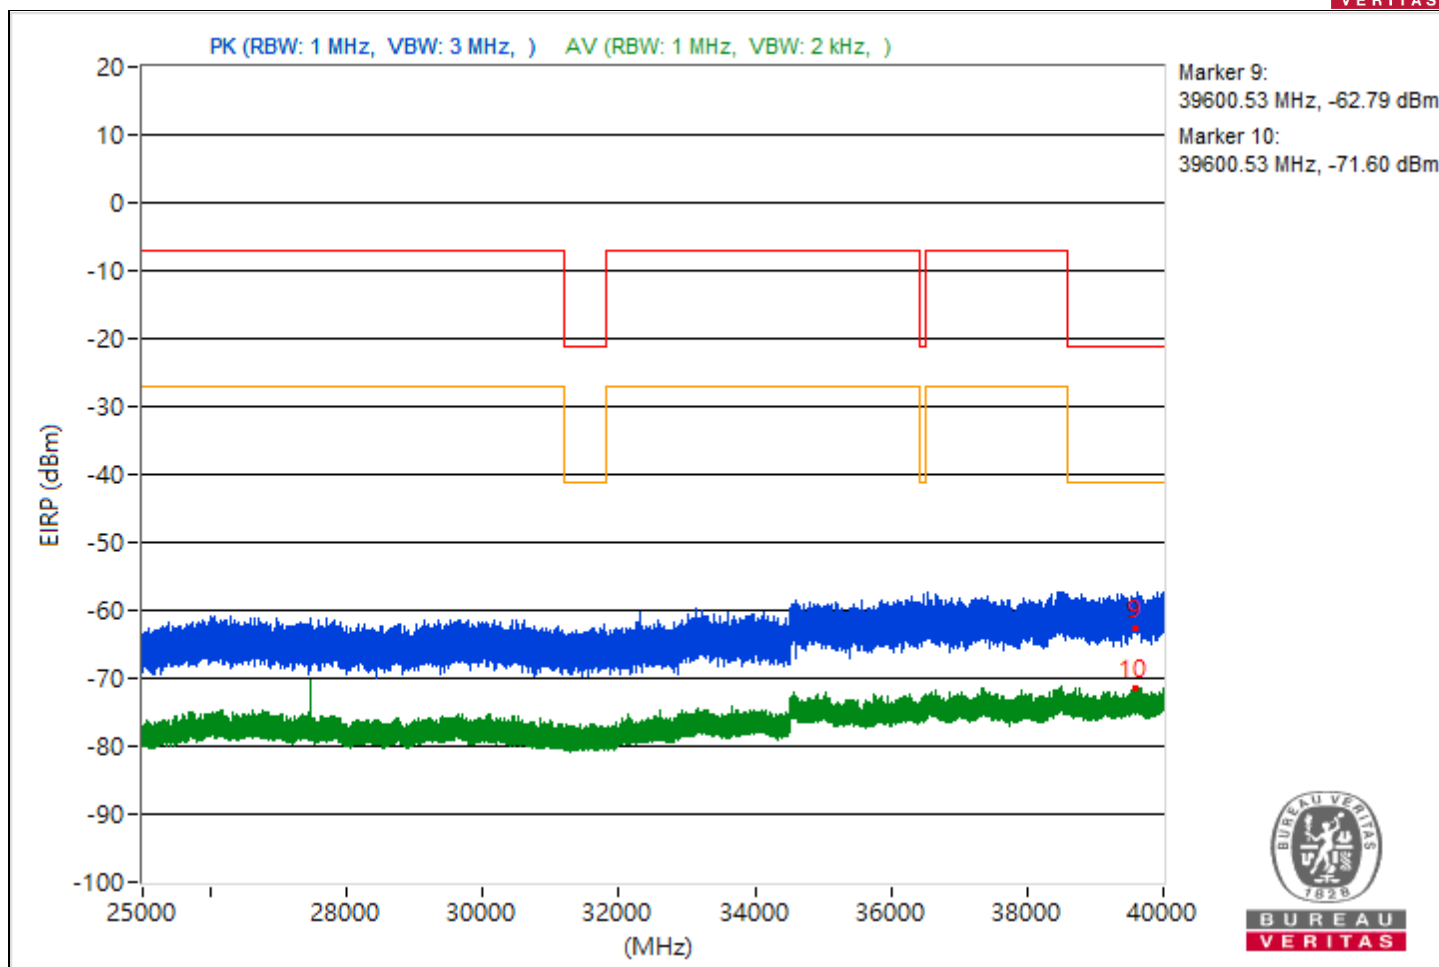


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.41	42.21 PK	74	-31.79	-64.2	-64.68	8.37	-53.05
2	5447.41	33.6 AV	54	-20.4	-73.52	-72.61	8.37	-61.66
3	7250.14	46.62 PK	74	-27.38	-60.87	-59.31	8.37	-48.64
4	7250.14	38.03 AV	54	-15.97	-68.01	-69.29	8.37	-57.23
5	21380.1	38.98 PK	74	-35.02	-67.46	-67.86	8.37	-56.28
6	21380.1	27.9 AV	54	-26.1	-81.06	-77.24	8.37	-67.36
7	23968.6	39.92 PK	74	-34.08	-66.61	-66.83	8.37	-55.34
8	23968.6	29.28 AV	54	-24.72	-79.97	-75.74	8.37	-65.98
9	39573.16	34.61 PK	74	-39.39	-73.66	-70.85	8.37	-60.65
10	39573.16	24.12 AV	54	-29.88	-85.96	-80.62	8.37	-71.14

Note: Margin value = Emission Level - Limit value

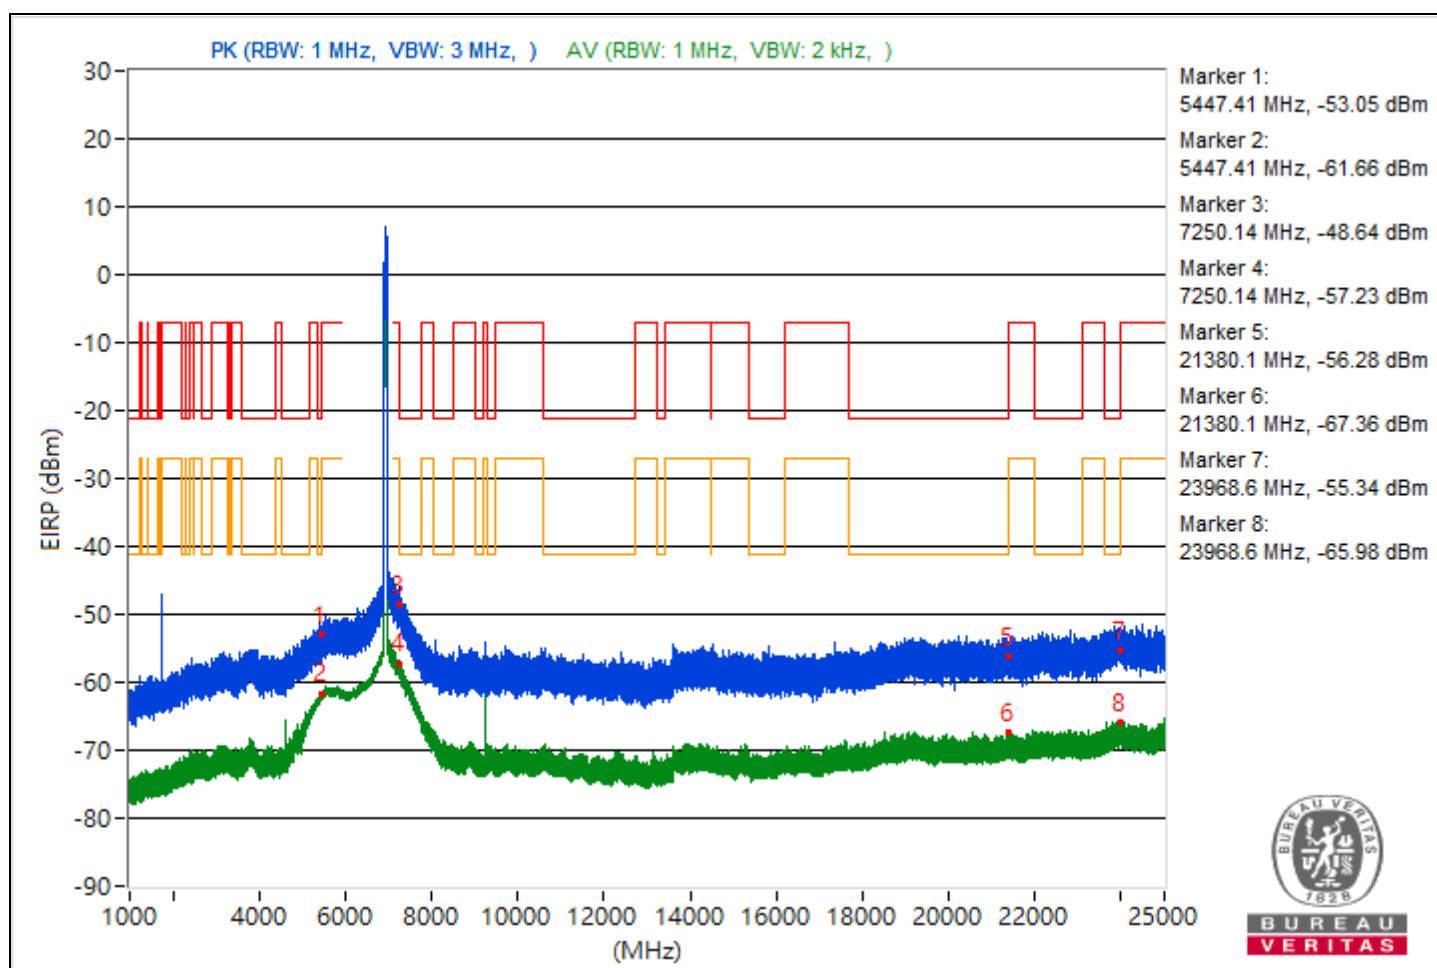





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.3	40.93 PK	74	-33.07	-66.62	-64.96	8.37	-54.33
2	5451.3	33.23 AV	54	-20.77	-73.73	-73.11	8.37	-62.03
3	7258.16	45.55 PK	74	-28.45	-61.39	-60.8	8.37	-49.71
4	7258.16	38.7 AV	54	-15.3	-68.18	-67.72	8.37	-56.56
5	19205.2	38.19 PK	74	-35.81	-68.82	-68.11	8.37	-57.07
6	19205.2	27.7 AV	54	-26.3	-78.21	-79.82	8.37	-67.56
7	23993.8	39.62 PK	74	-34.38	-65.87	-68.59	8.37	-55.64
8	23993.8	29.75 AV	54	-24.25	-76.12	-77.84	8.37	-65.51
9	39553.69	33.64 PK	74	-40.36	-74.46	-71.92	8.37	-61.62
10	39553.69	23.54 AV	54	-30.46	-86.32	-81.27	8.37	-71.72

Note: Margin value = Emission Level - Limit value

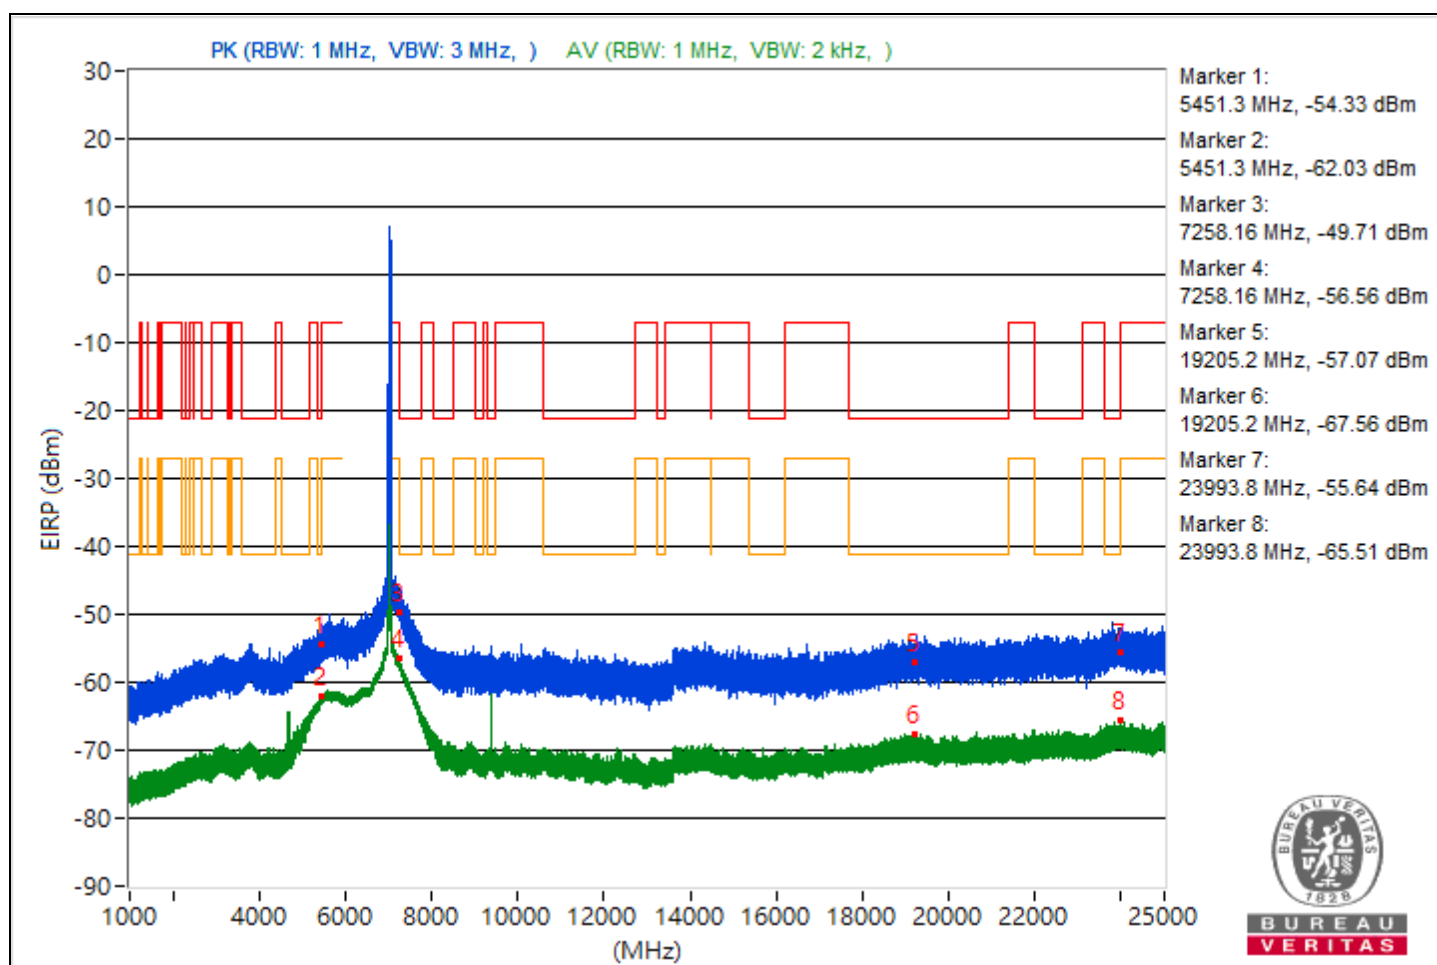


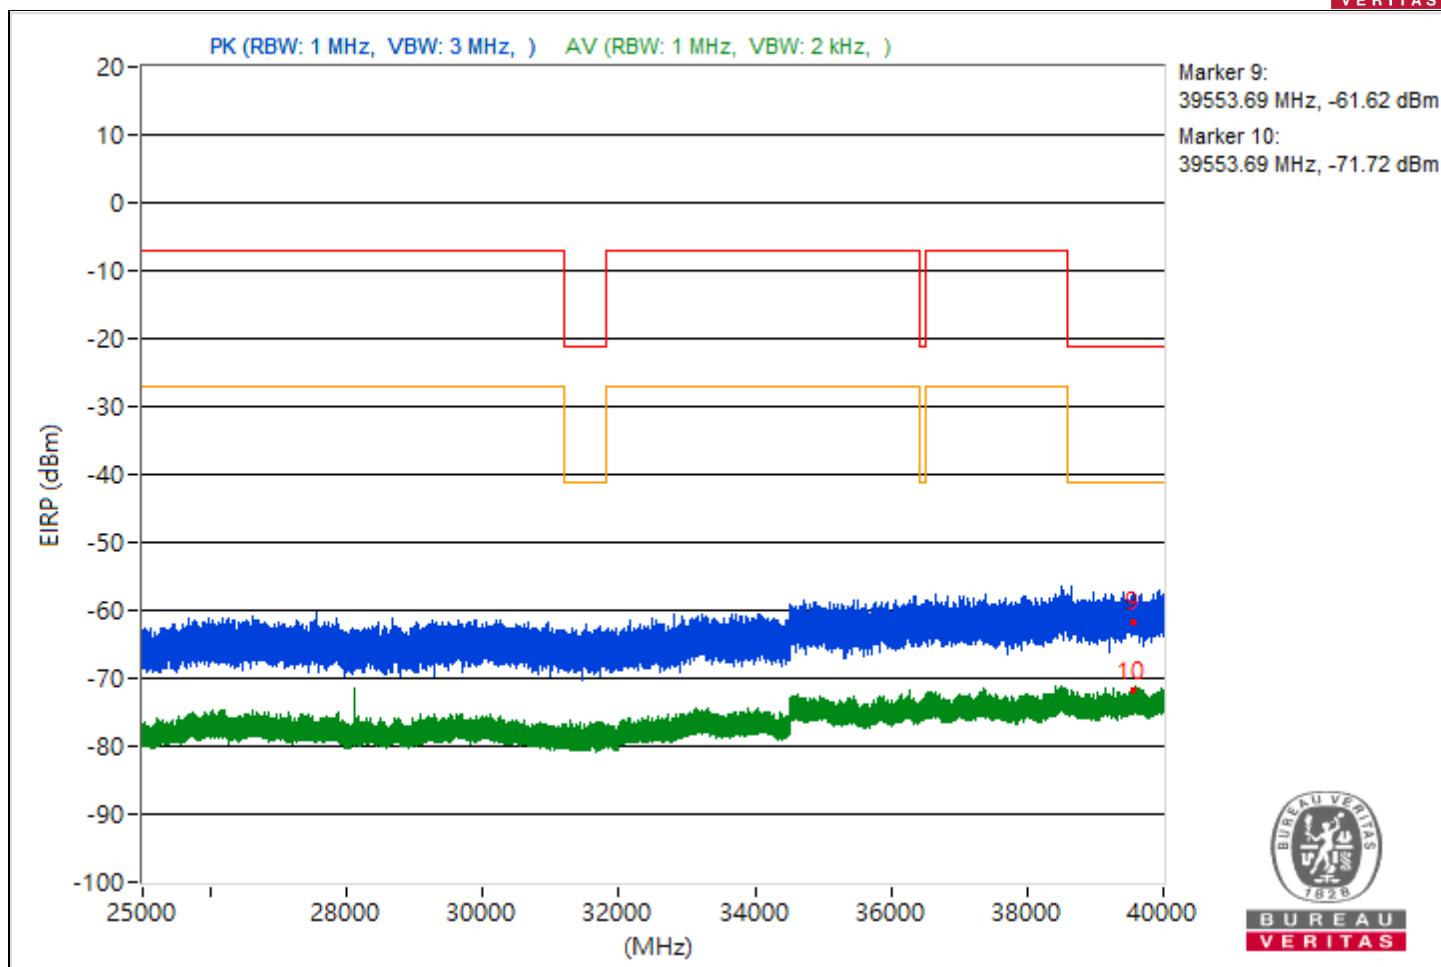


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.44	43.14 PK	74	-30.86	-63.51	-63.49	8.37	-52.12
2	5457.44	35.8 AV	54	-18.2	-70.79	-70.9	8.37	-59.46
3	8033.33	48 PK	74	-26	-66.16	-56.03	8.37	-47.26
4	8033.33	47.39 AV	54	-6.61	-71.77	-56.36	8.37	-47.87
5	19098.6	39.62 PK	74	-34.38	-66.74	-67.31	8.37	-55.64
6	19098.6	26.44 AV	54	-27.56	-79.07	-81.72	8.37	-68.82
7	23907.6	39.46 PK	74	-34.54	-69.44	-65.71	8.37	-55.8
8	23907.6	27.59 AV	54	-26.41	-77.63	-81.18	8.37	-67.67
9	39668	32.15 PK	74	-41.85	-74.05	-74.99	8.37	-63.11
10	39668	21.33 AV	54	-32.67	-84.35	-86.55	8.37	-73.93

Note: Margin value = Emission Level - Limit value

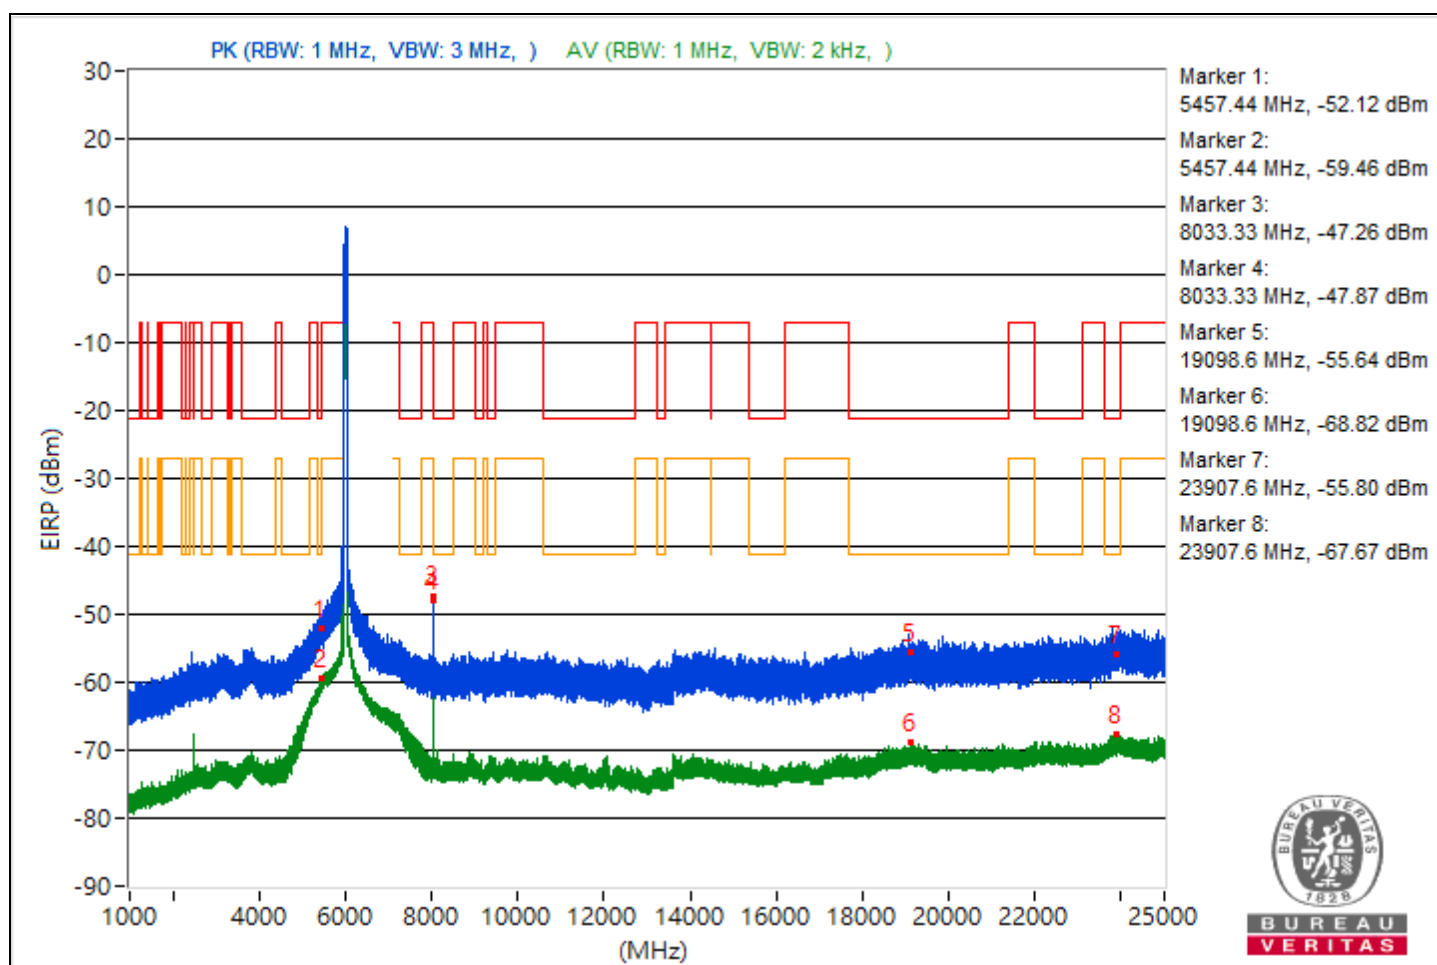

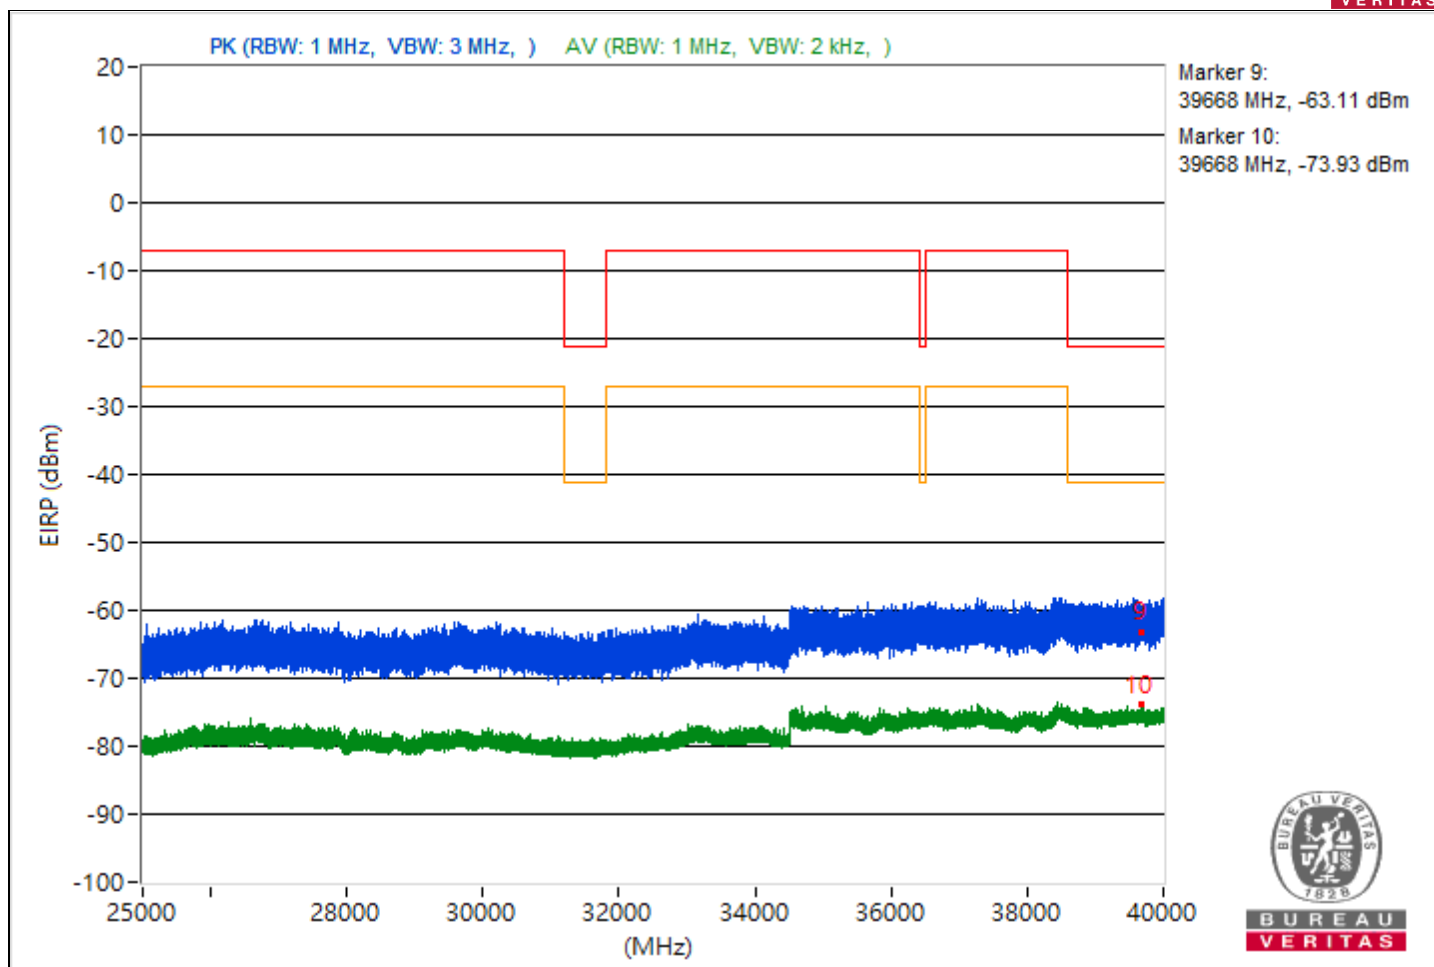



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.29	41.91 PK	74	-32.09	-64.34	-65.16	8.37	-53.35
2	5450.29	33.56 AV	54	-20.44	-73.86	-72.42	8.37	-61.7
3	8460.09	43.46 PK	74	-30.54	-67.52	-61.05	8.37	-51.8
4	8460.09	40.91 AV	54	-13.09	-72.35	-63.22	8.37	-54.35
5	21066.3	38.71 PK	74	-35.29	-68	-67.85	8.37	-56.55
6	21066.3	26.2 AV	54	-27.8	-78.66	-83.52	8.37	-69.06
7	23772.9	38.84 PK	74	-35.16	-69.45	-66.6	8.37	-56.42
8	23772.9	27.16 AV	54	-26.84	-78.41	-80.89	8.37	-68.1
9	39589.96	35.14 PK	74	-38.86	-71.85	-71.17	8.37	-60.12
10	39589.96	21.08 AV	54	-32.92	-87.53	-84.21	8.37	-74.18

Note: Margin value = Emission Level - Limit value

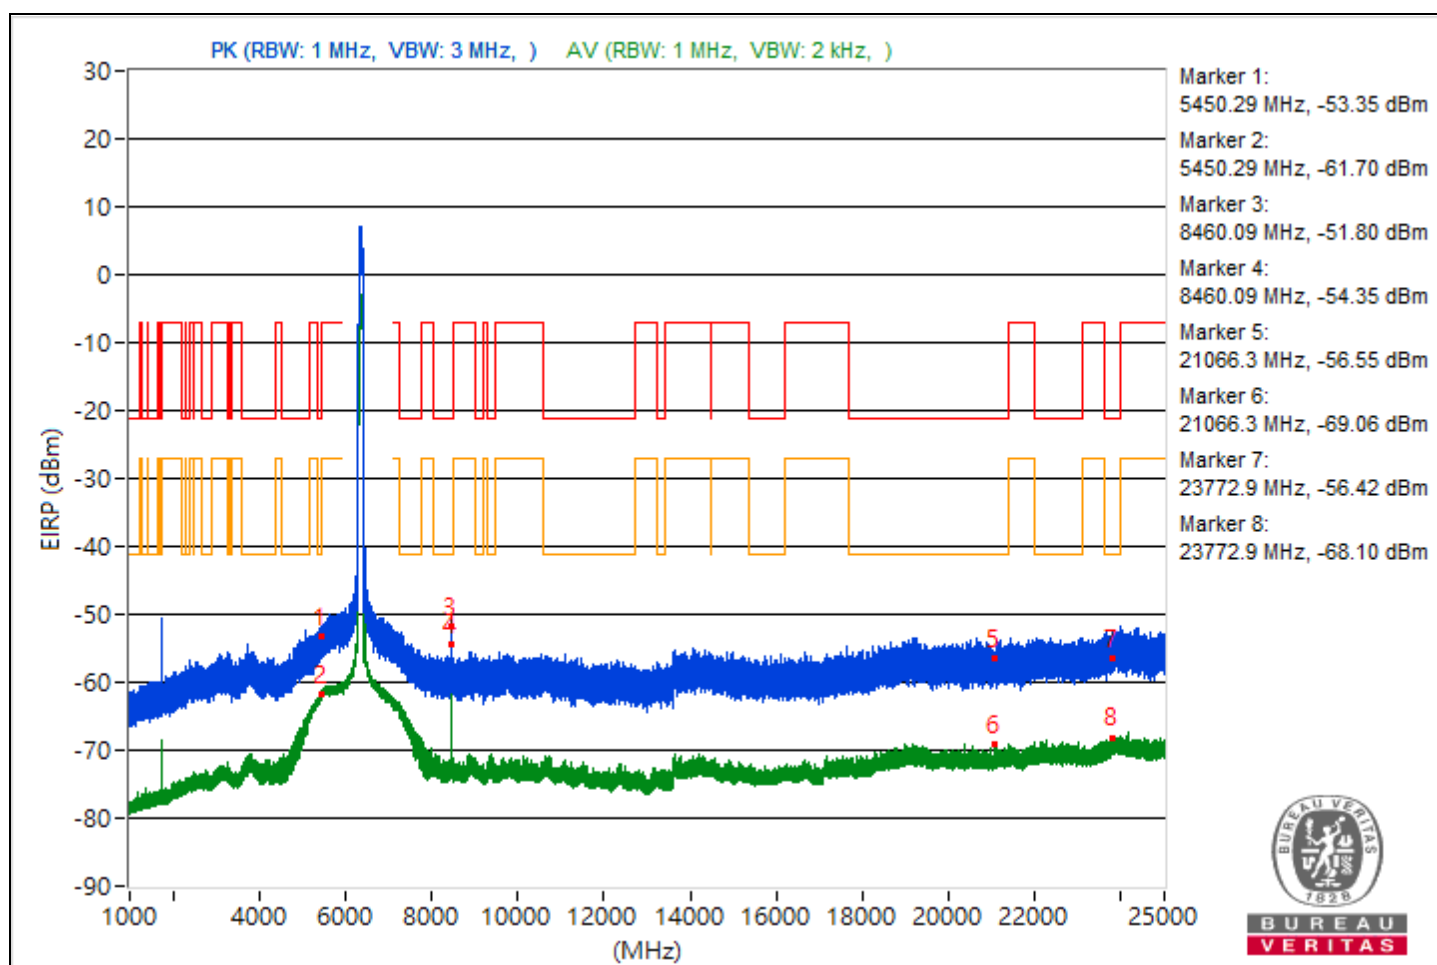

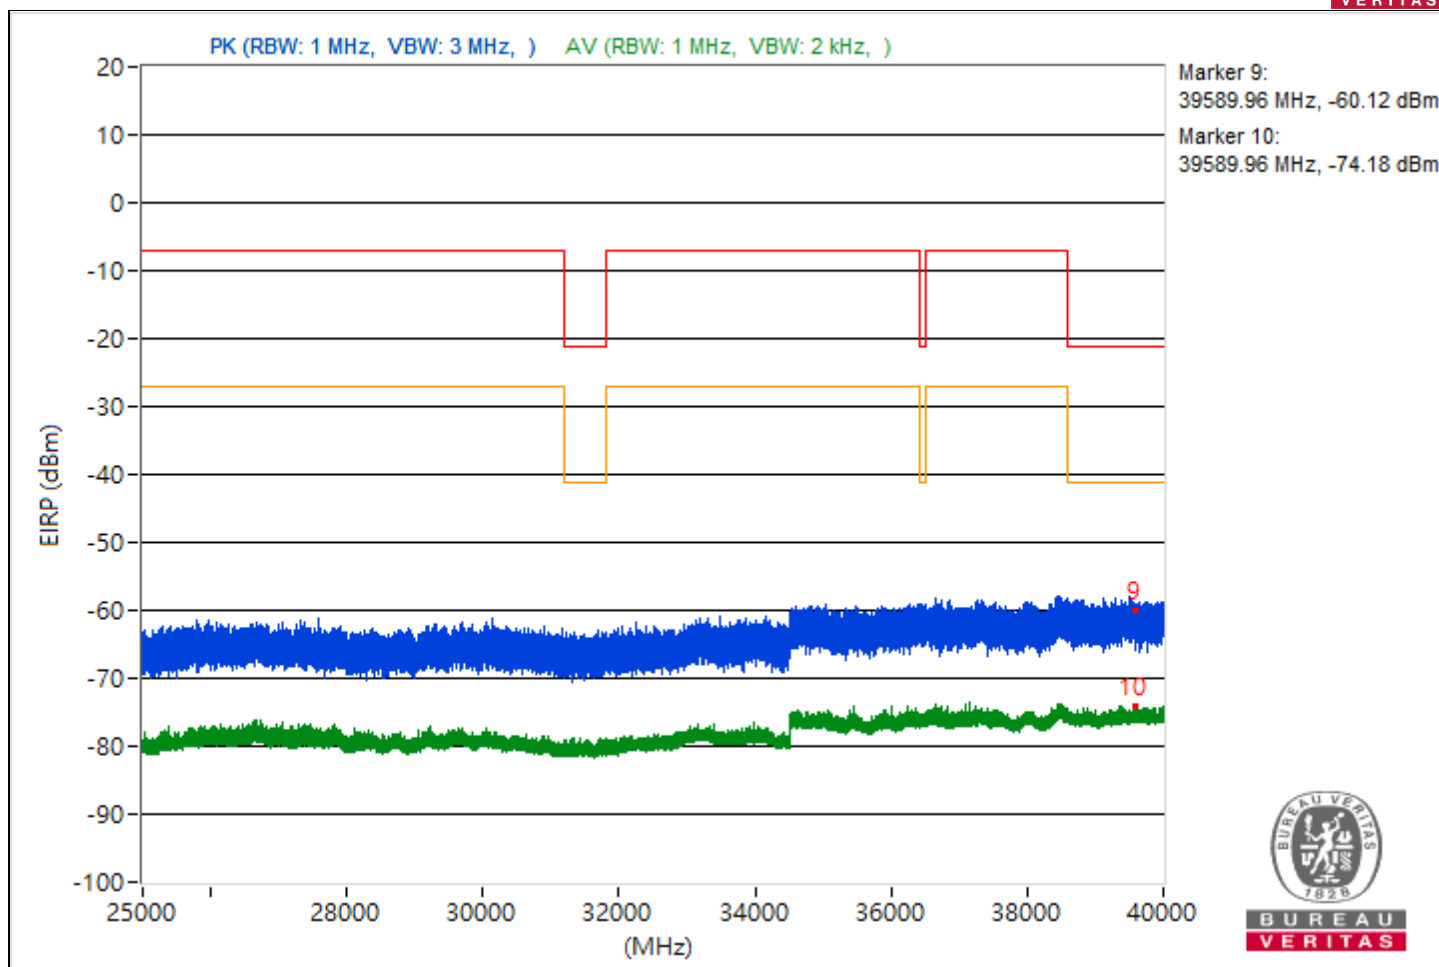



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.21	41.72 PK	74	-32.28	-66.1	-64	8.37	-53.54
2	5457.21	33.59 AV	54	-20.41	-72.67	-73.46	8.37	-61.67
3	7254.19	41.34 PK	74	-32.66	-64.15	-66.86	8.37	-53.92
4	7254.19	32.61 AV	54	-21.39	-74.36	-73.72	8.37	-62.65
5	19031.1	38.42 PK	74	-35.58	-68.37	-68.08	8.37	-56.84
6	19031.1	26.93 AV	54	-27.07	-78.65	-81.11	8.37	-68.33
7	23814	40.03 PK	74	-33.97	-66.67	-66.55	8.37	-55.23
8	23814	28.18 AV	54	-25.82	-76.84	-81.08	8.37	-67.08
9	39831.82	33.08 PK	74	-40.92	-73.12	-74.05	8.37	-62.18
10	39831.82	22.14 AV	54	-31.86	-86.48	-83.15	8.37	-73.12

Note: Margin value = Emission Level - Limit value

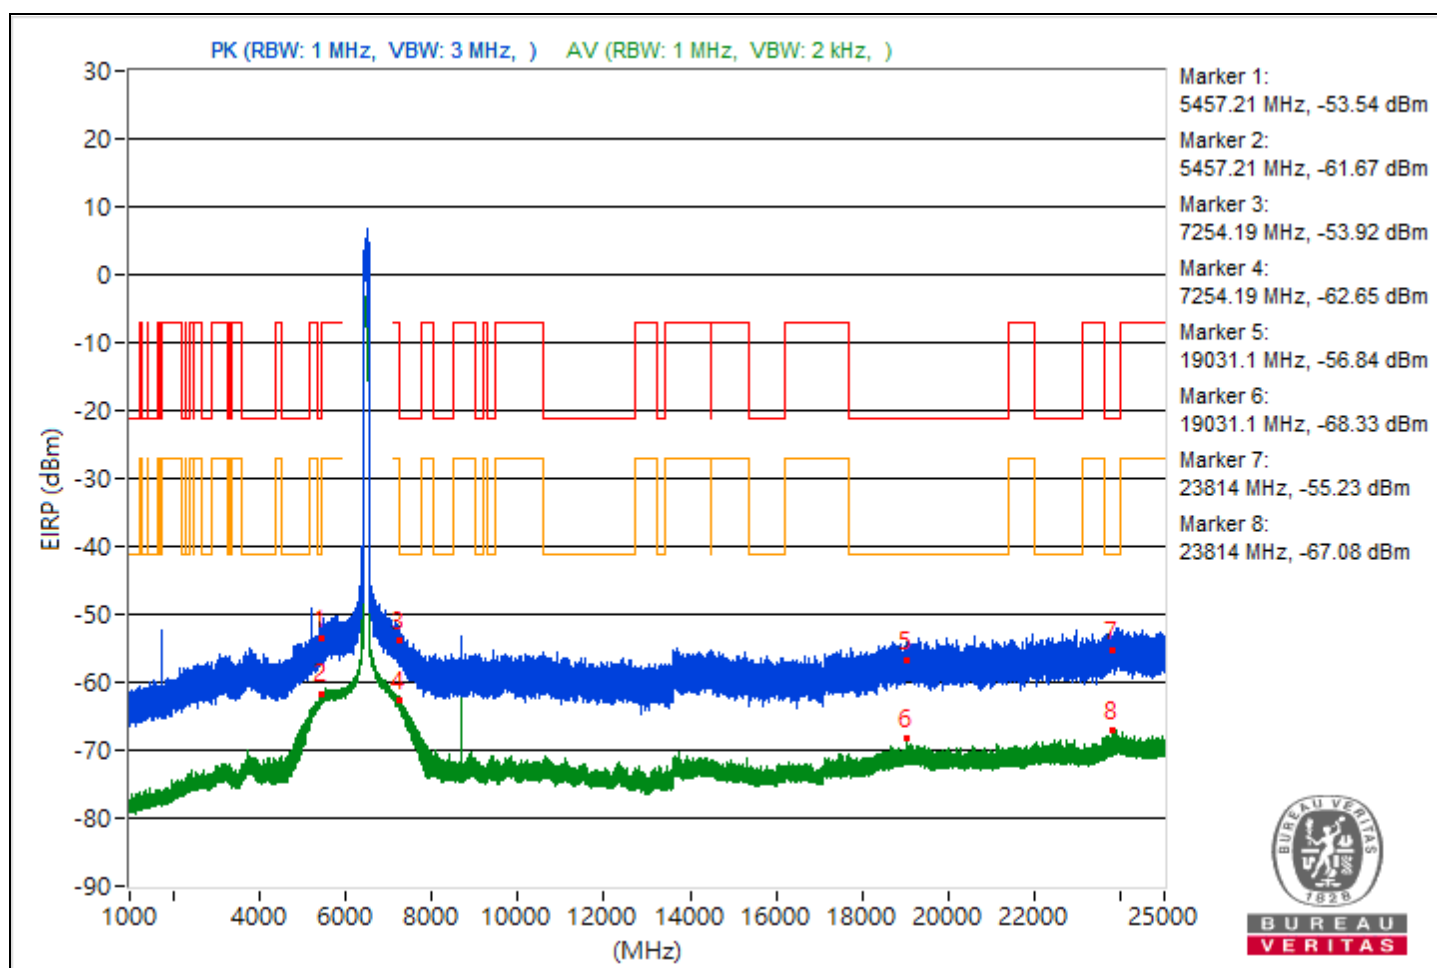

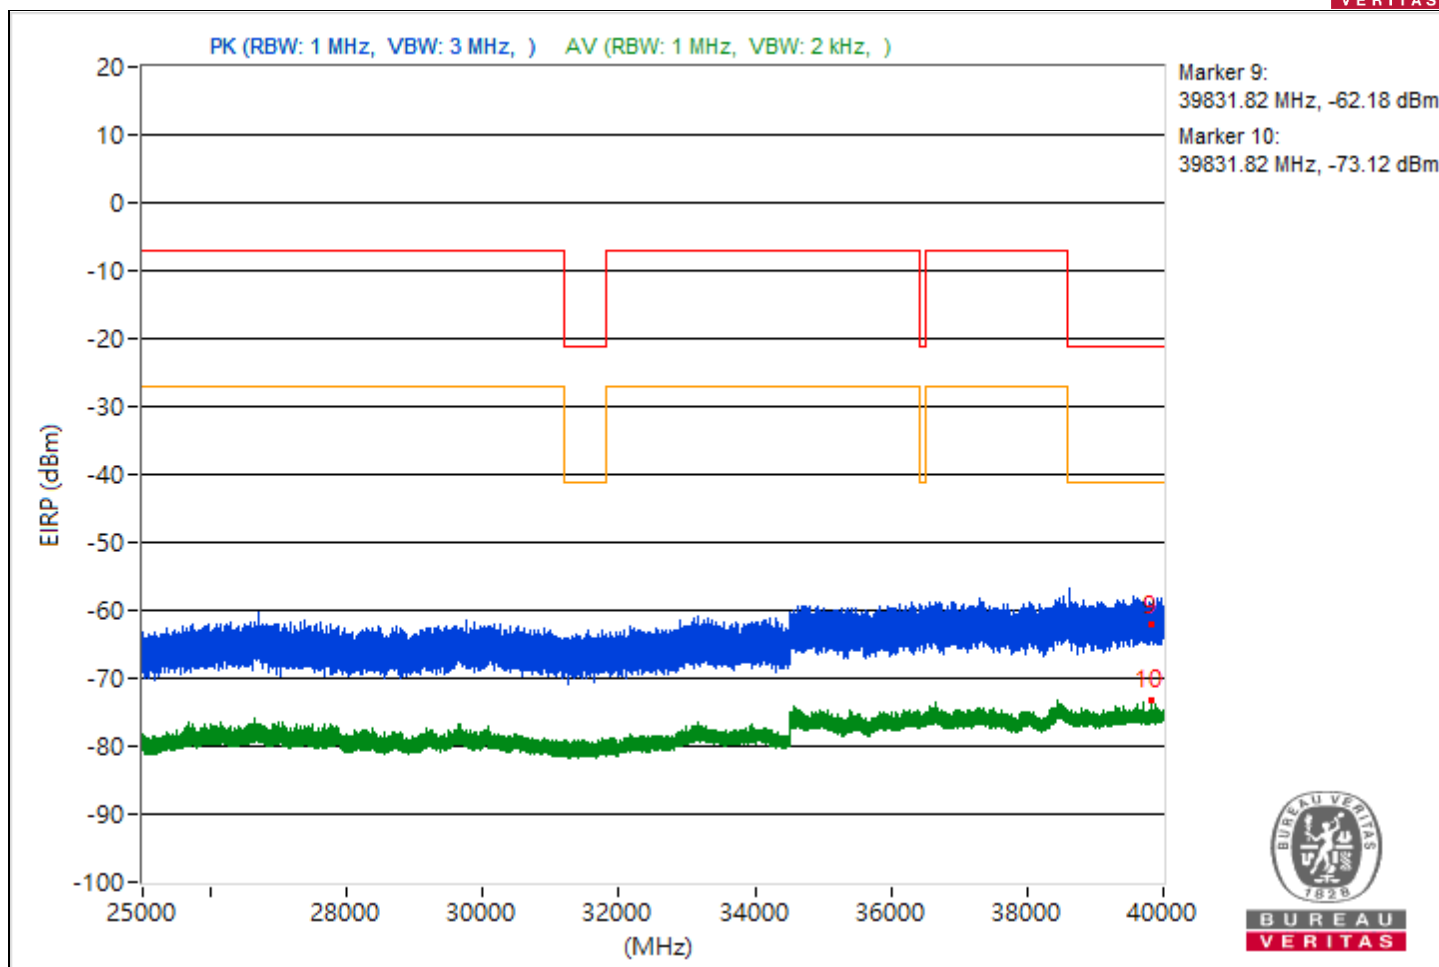



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.56	40.23 PK	74	-33.77	-66.7	-66.14	8.37	-55.03
2	5439.56	32.9 AV	54	-21.1	-73.15	-74.42	8.37	-62.36
3	7254.89	40.16 PK	74	-33.84	-65.52	-67.71	8.37	-55.1
4	7254.89	33.59 AV	54	-20.41	-72.73	-73.4	8.37	-61.67
5	21041.9	36.73 PK	74	-37.27	-71.55	-68.71	8.37	-58.53
6	21041.9	26.28 AV	54	-27.72	-82.64	-78.87	8.37	-68.98
7	23781.1	39.02 PK	74	-34.98	-66.24	-69.67	8.37	-56.24
8	23781.1	27.76 AV	54	-26.24	-81.12	-77.41	8.37	-67.5
9	38679.47	32.53 PK	74	-41.47	-77.09	-72.36	8.37	-62.73
10	38679.47	21.4 AV	54	-32.6	-83.94	-87.09	8.37	-73.86

Note: Margin value = Emission Level - Limit value

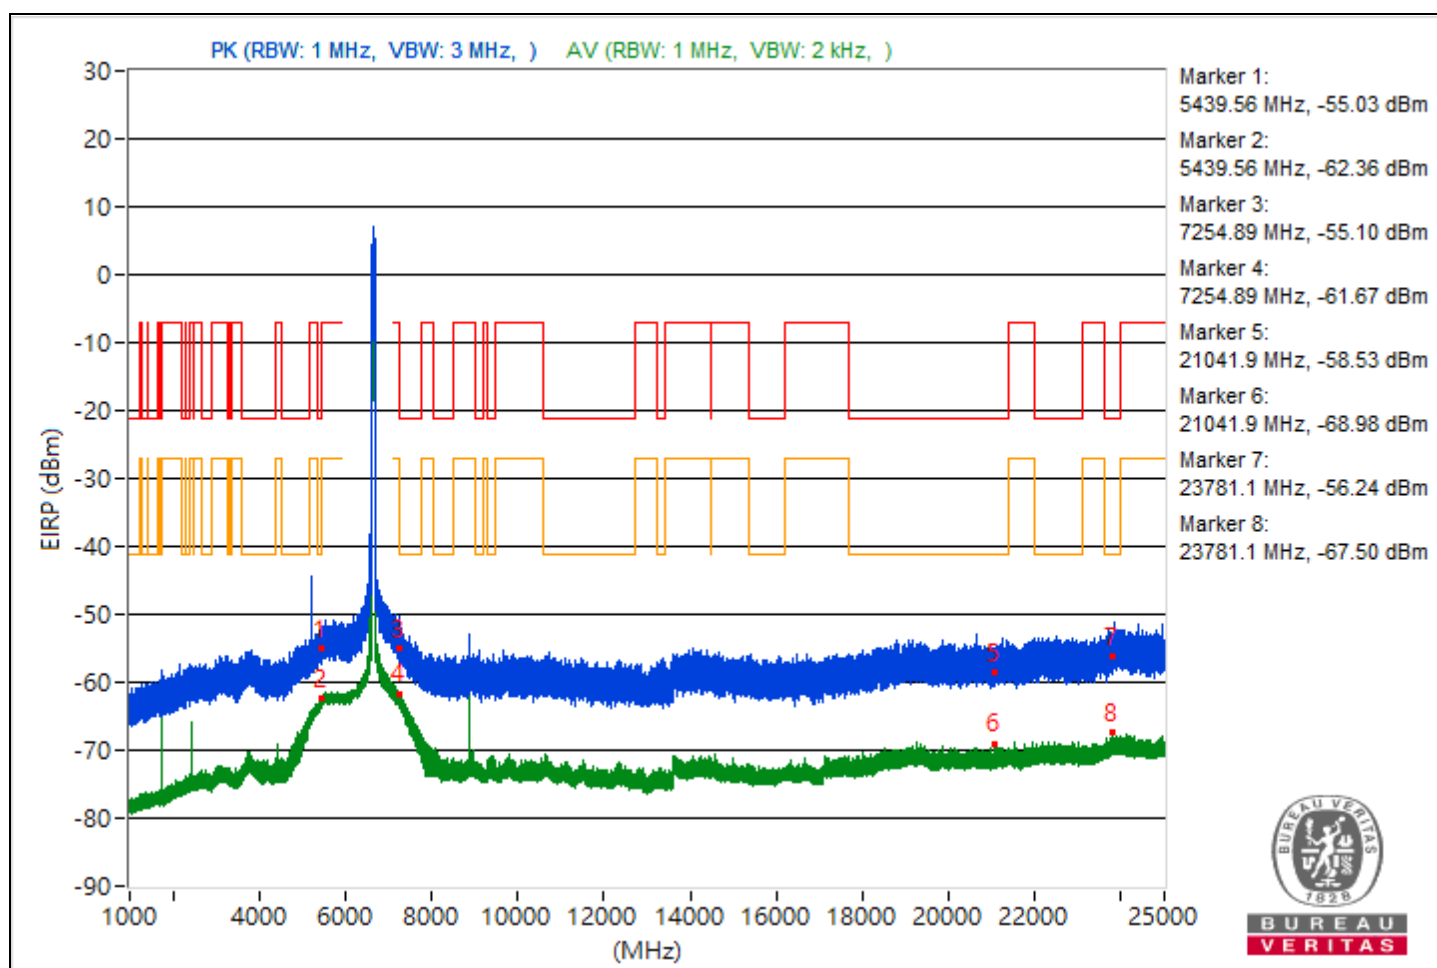


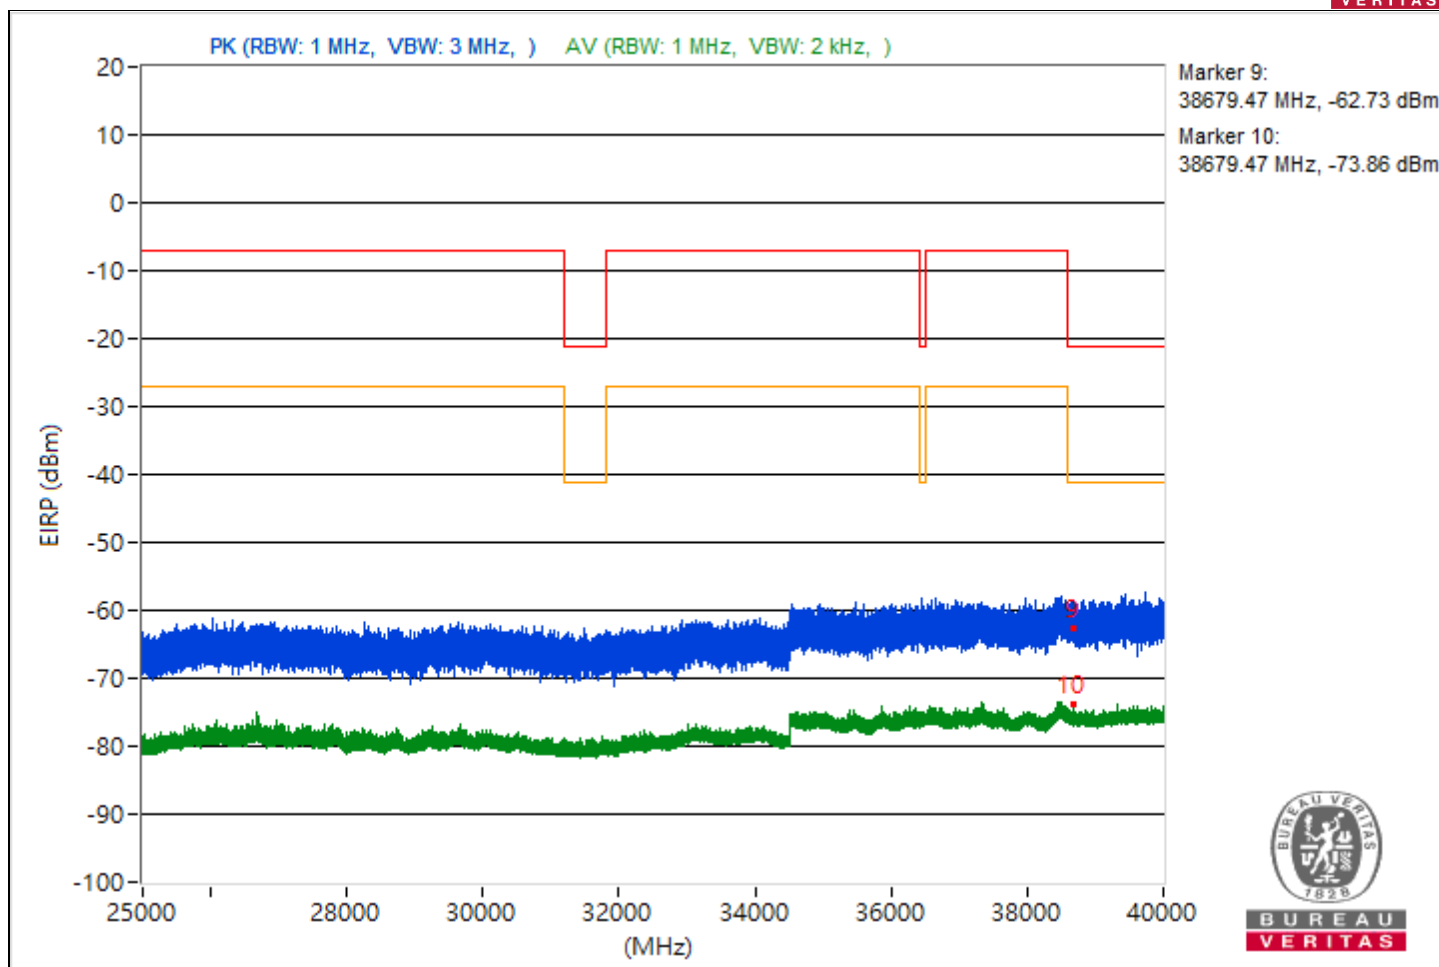


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.48	42.68 PK	74	-31.32	-63.48	-64.49	8.37	-52.58
2	5446.48	33.88 AV	54	-20.12	-72.87	-72.65	8.37	-61.38
3	7258.93	43.69 PK	74	-30.31	-63.31	-62.63	8.37	-51.57
4	7258.93	36.22 AV	54	-17.78	-70.07	-70.79	8.37	-59.04
5	19259.6	37.17 PK	74	-36.83	-69.91	-69.07	8.37	-58.09
6	19259.6	26.78 AV	54	-27.22	-82.66	-78.17	8.37	-68.48
7	23939.3	40.52 PK	74	-33.48	-66.67	-65.63	8.37	-54.74
8	23939.3	27.92 AV	54	-26.08	-77.14	-81.23	8.37	-67.34
9	39698.84	33.14 PK	74	-40.86	-73.37	-73.64	8.37	-62.12
10	39698.84	20.93 AV	54	-33.07	-84.49	-87.41	8.37	-74.33

Note: Margin value = Emission Level - Limit value

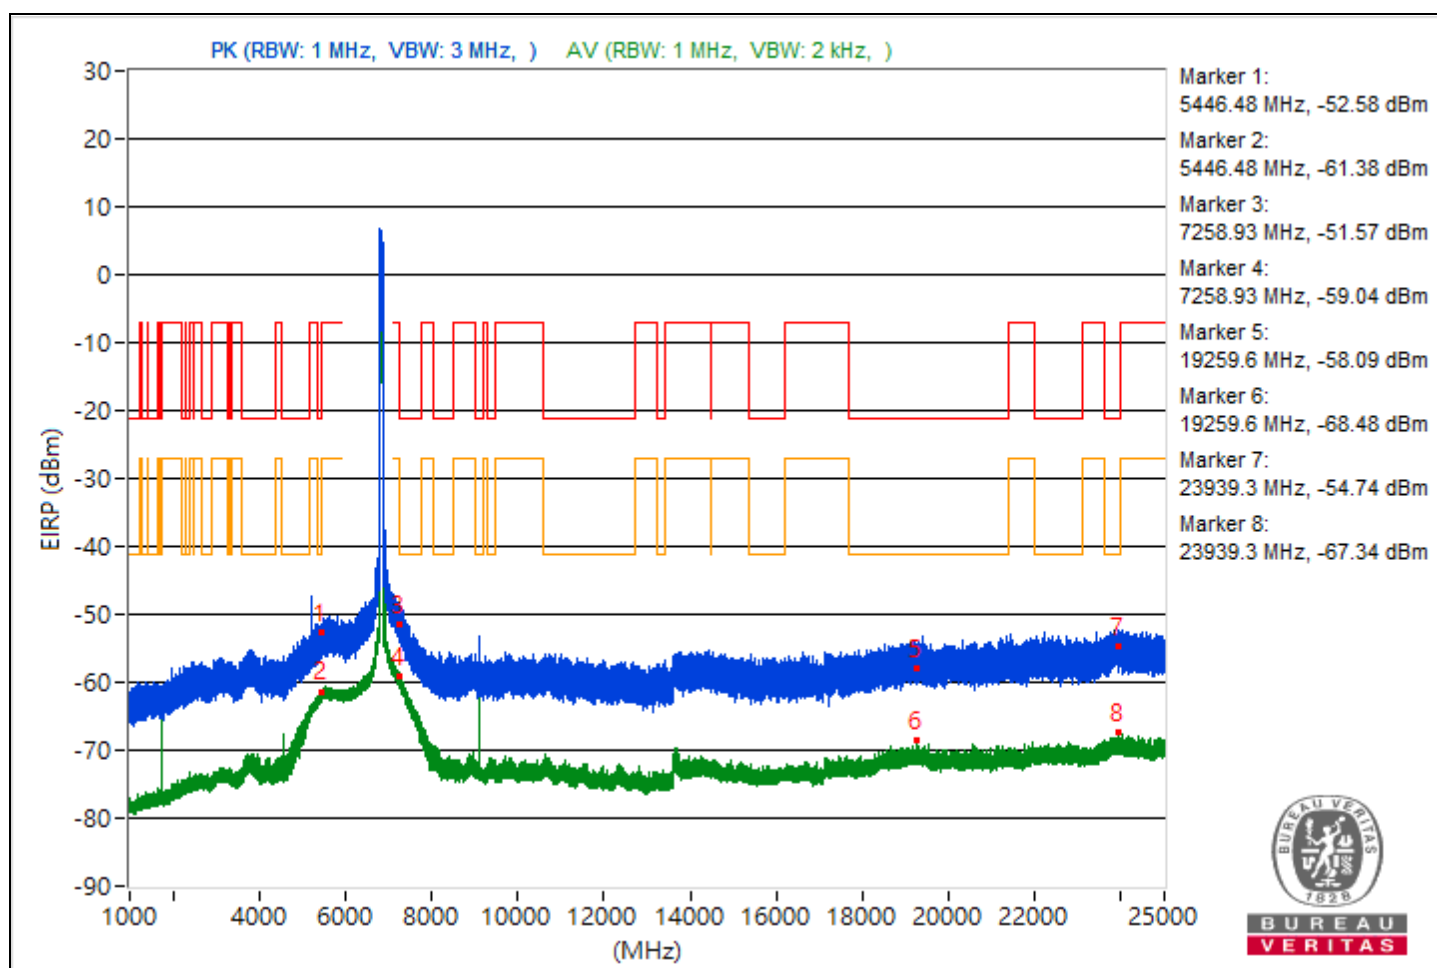


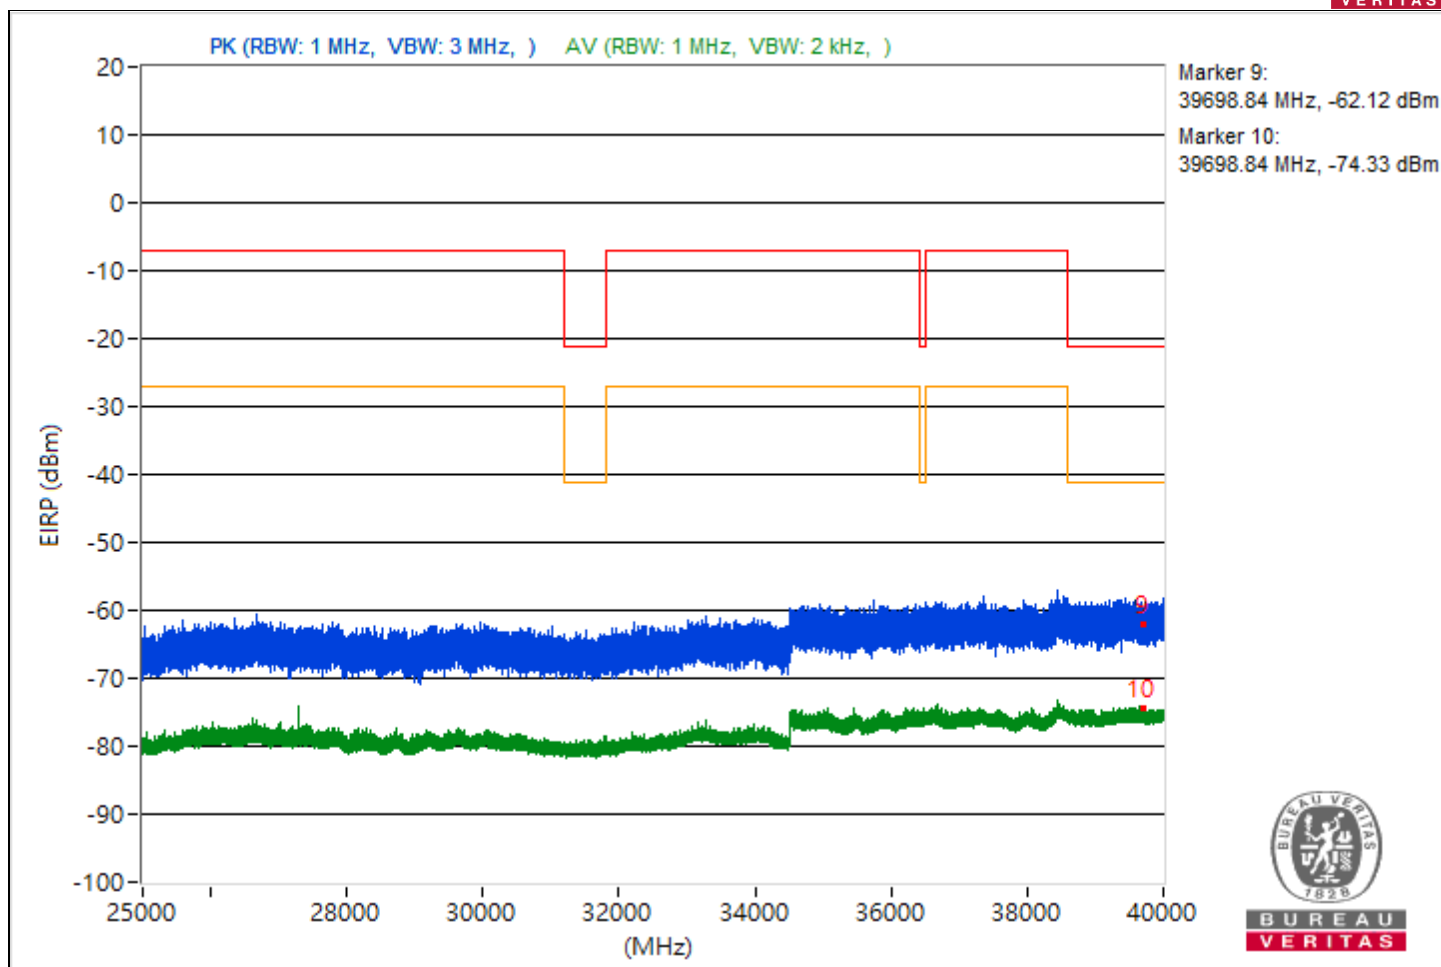


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4656.57	39.46 PK	74	-34.54	-69.6	-65.64	8.37	-55.8
2	4656.57	31.3 AV	54	-22.7	-83.27	-72.69	8.37	-63.96
3	7253.1	43.33 PK	74	-30.67	-62.11	-64.96	8.37	-51.93
4	7253.1	35.93 AV	54	-18.07	-70.4	-71.03	8.37	-59.33
5	19315.1	38.44 PK	74	-35.56	-69.1	-67.46	8.37	-56.82
6	19315.1	26.05 AV	54	-27.95	-79.19	-82.69	8.37	-69.21
7	23963	40.75 PK	74	-33.25	-64.85	-67.25	8.37	-54.51
8	23963	27.39 AV	54	-26.61	-78.1	-80.82	8.37	-67.87
9	39708.98	34.76 PK	74	-39.24	-72.53	-71.32	8.37	-60.5
10	39708.98	21.52 AV	54	-32.48	-86.95	-83.84	8.37	-73.74

Note: Margin value = Emission Level - Limit value

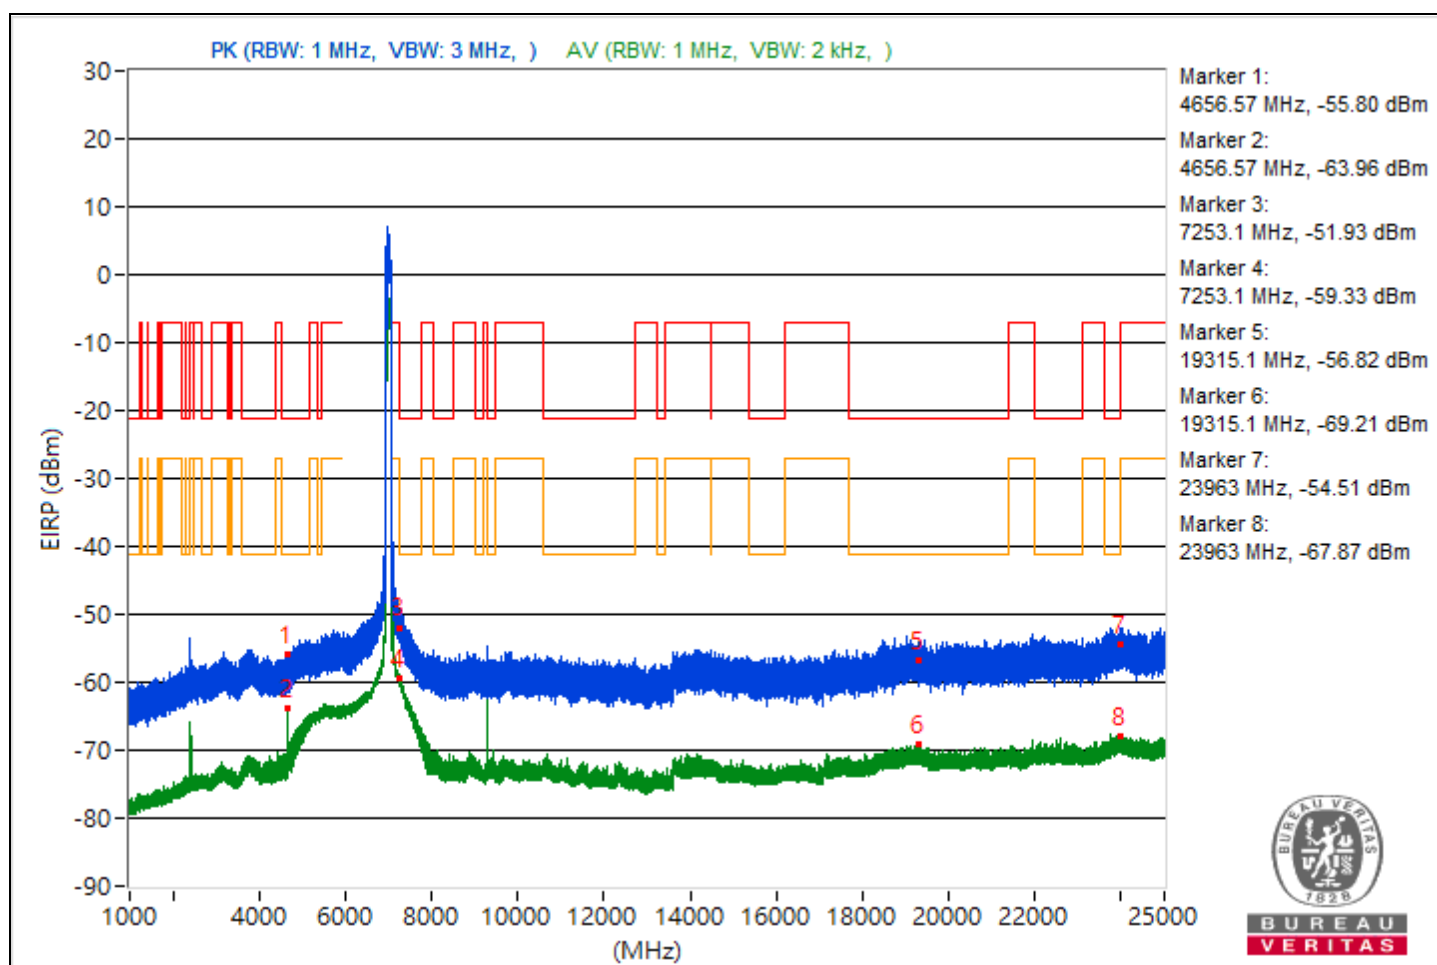


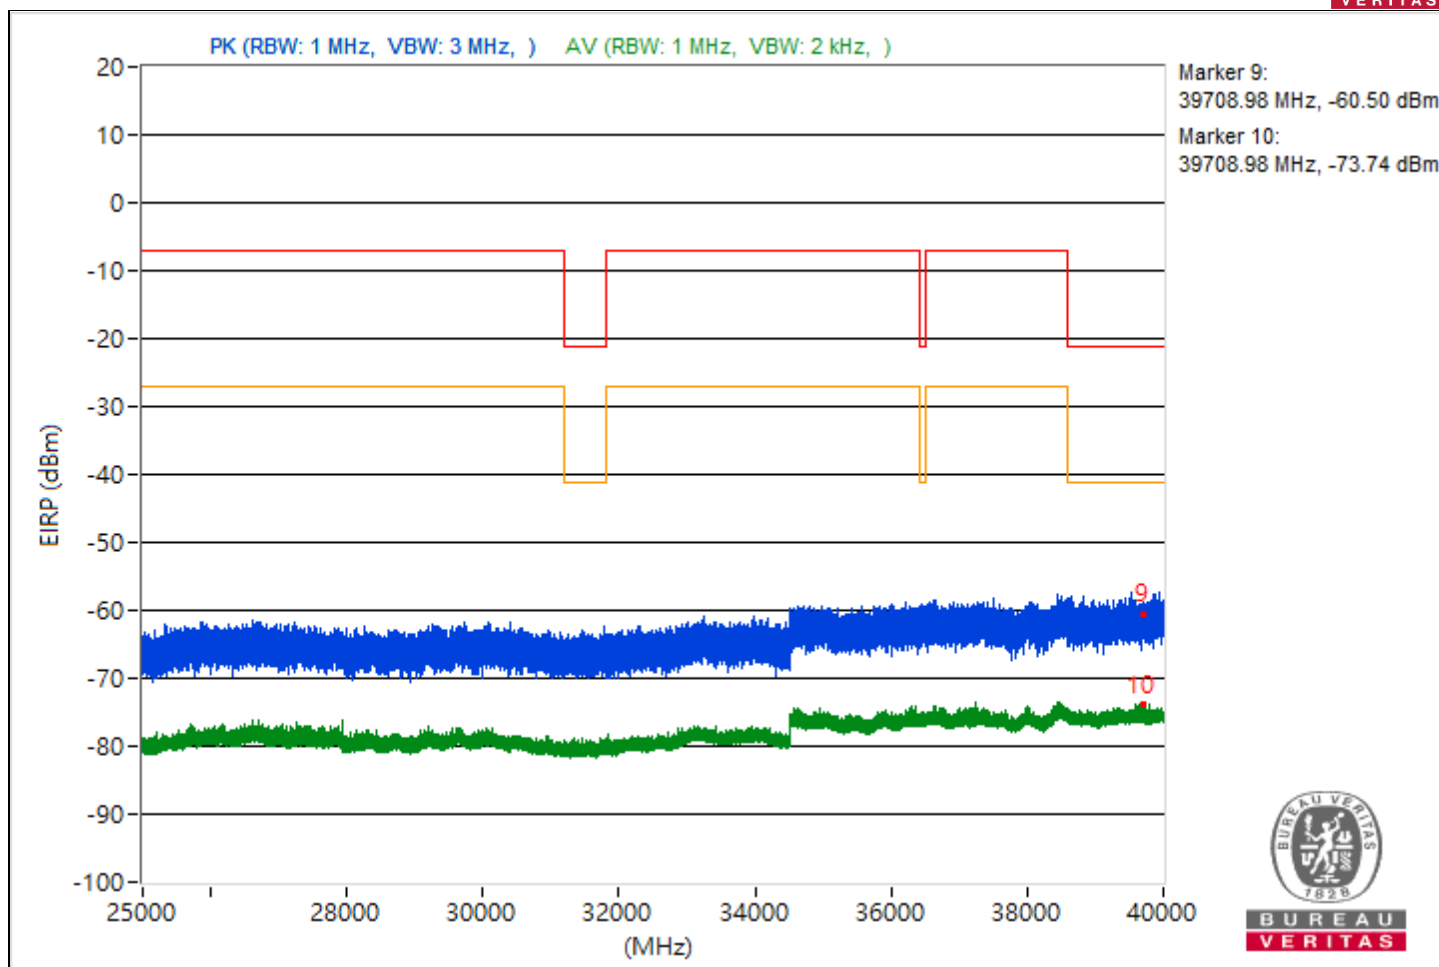


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.4	42.36 PK	74	-31.64	-64.25	-64.31	8.37	-52.9
2	5453.4	35.46 AV	54	-18.54	-71.08	-71.29	8.37	-59.8
3	8033.33	47.24 PK	74	-26.76	-68.2	-56.69	8.37	-48.02
4	8033.33	46.45 AV	54	-7.55	-72.71	-57.3	8.37	-48.81
5	21279.8	38.35 PK	74	-35.65	-67.93	-68.69	8.37	-56.91
6	21279.8	25.67 AV	54	-28.33	-83.09	-79.55	8.37	-69.59
7	23937.6	39.27 PK	74	-34.73	-69.01	-66.19	8.37	-55.99
8	23937.6	27.16 AV	54	-26.84	-78.52	-80.73	8.37	-68.1
9	39309.51	34.17 PK	74	-39.83	-74	-71.34	8.37	-61.09
10	39309.51	20.91 AV	54	-33.09	-86.77	-84.9	8.37	-74.35

Note: Margin value = Emission Level - Limit value

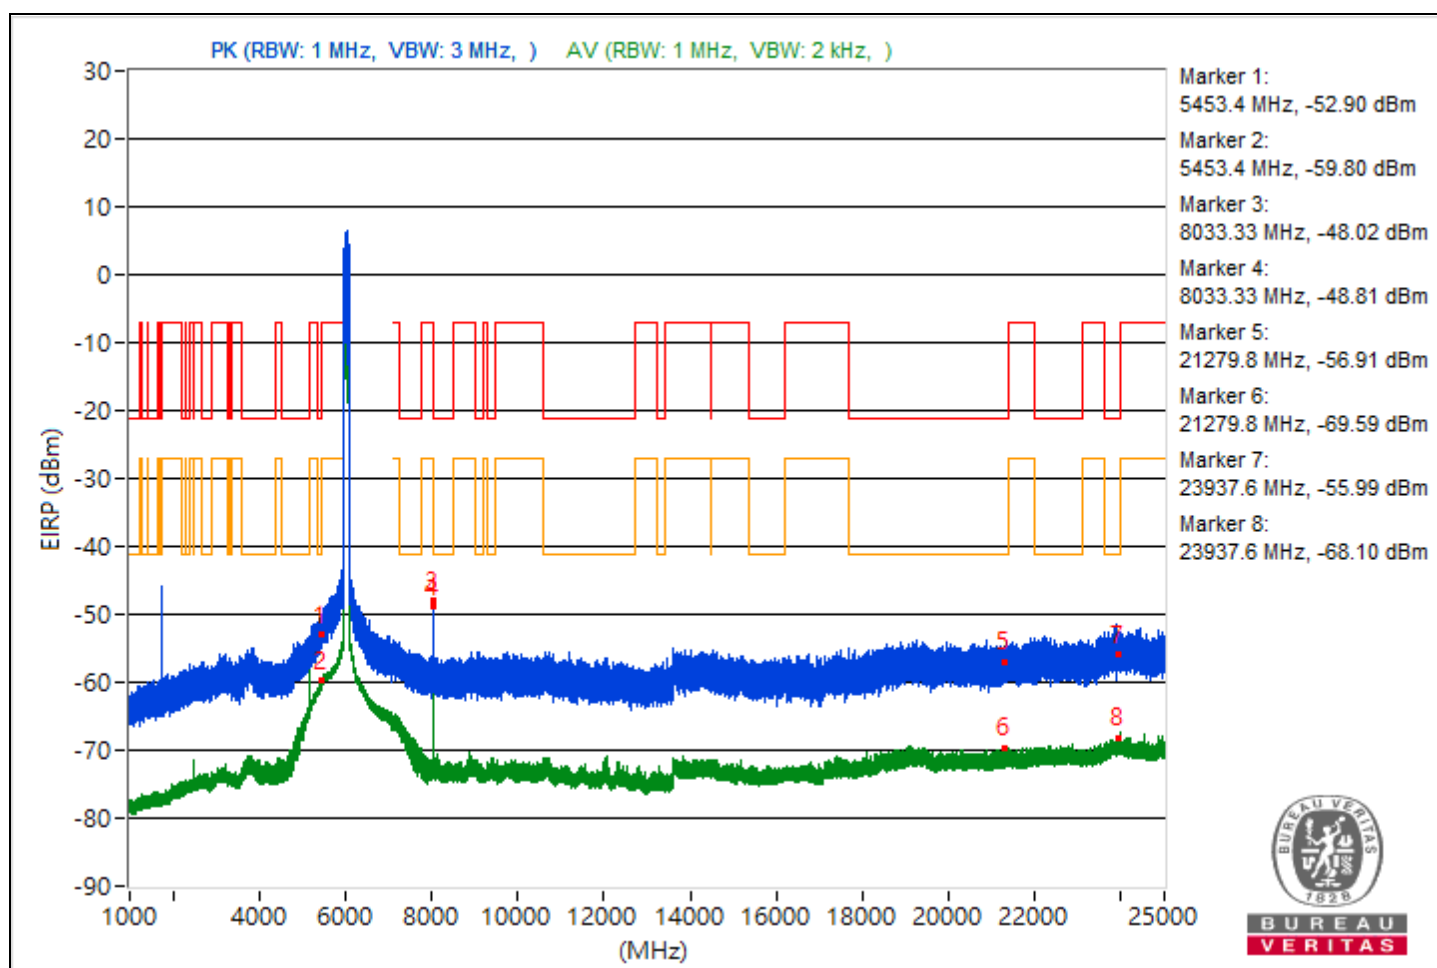


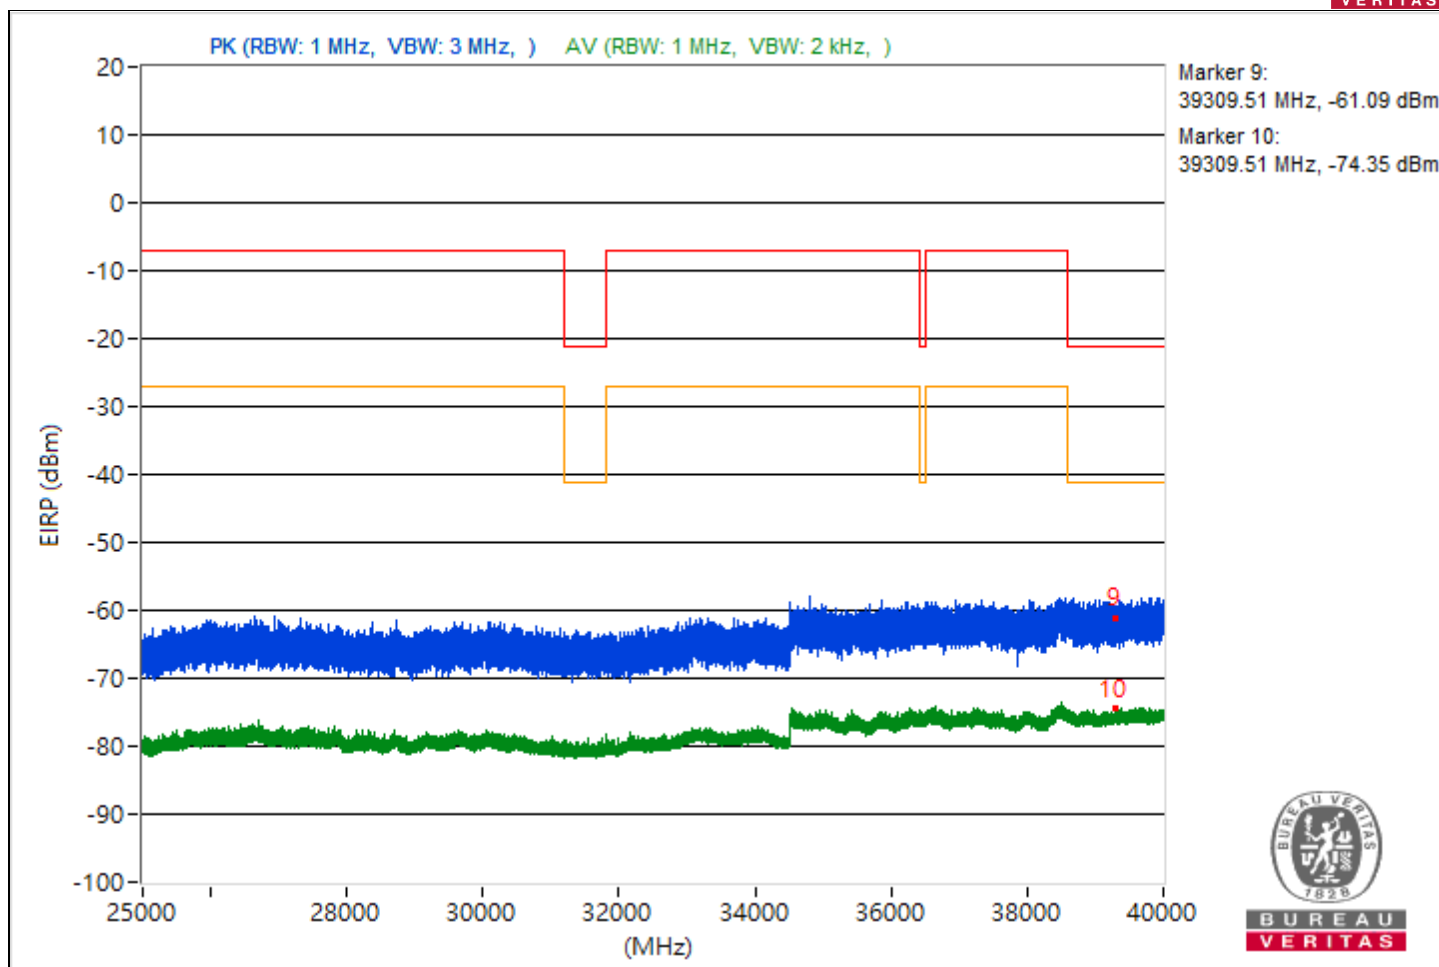


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5443.6	40.9 PK	74	-33.1	-65.91	-65.58	8.37	-54.36
2	5443.6	33.79 AV	54	-20.21	-72.7	-73	8.37	-61.47
3	8460	43.95 PK	74	-30.05	-68.77	-60.25	8.37	-51.31
4	8460	40.82 AV	54	-13.18	-72.7	-63.28	8.37	-54.44
5	19482.5	38.04 PK	74	-35.96	-67	-71.16	8.37	-57.22
6	19482.5	25.92 AV	54	-28.08	-83.15	-79.17	8.37	-69.34
7	23976.5	40.94 PK	74	-33.06	-64.51	-67.33	8.37	-54.32
8	23976.5	27.14 AV	54	-26.86	-81	-78.38	8.37	-68.12
9	38622.13	33.07 PK	74	-40.93	-73.13	-74.06	8.37	-62.19
10	38622.13	21.11 AV	54	-32.89	-84.35	-87.16	8.37	-74.15

Note: Margin value = Emission Level - Limit value

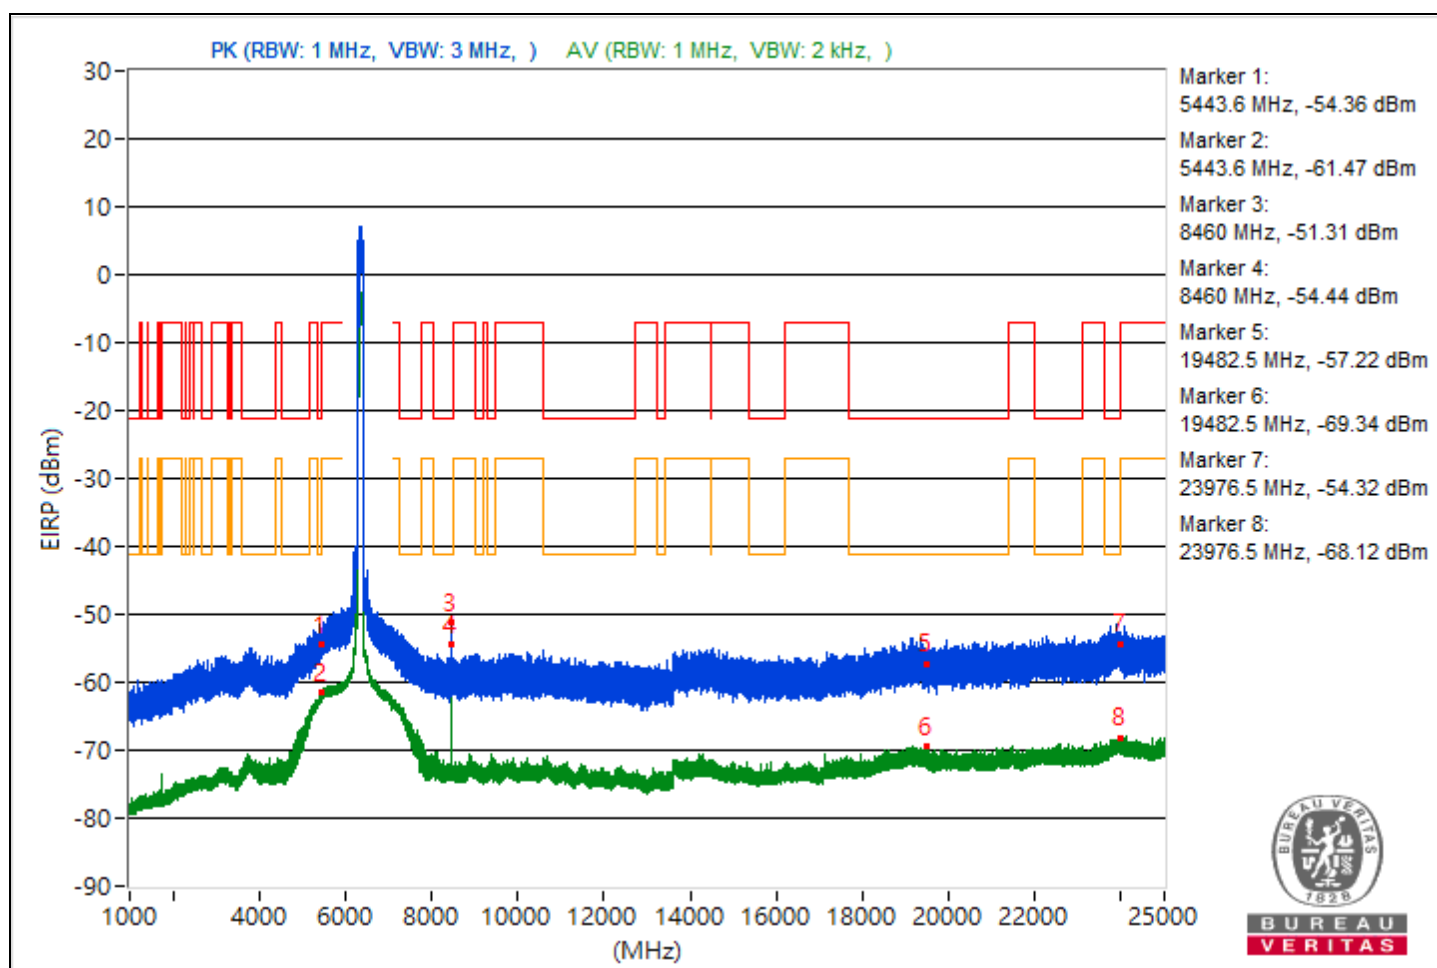


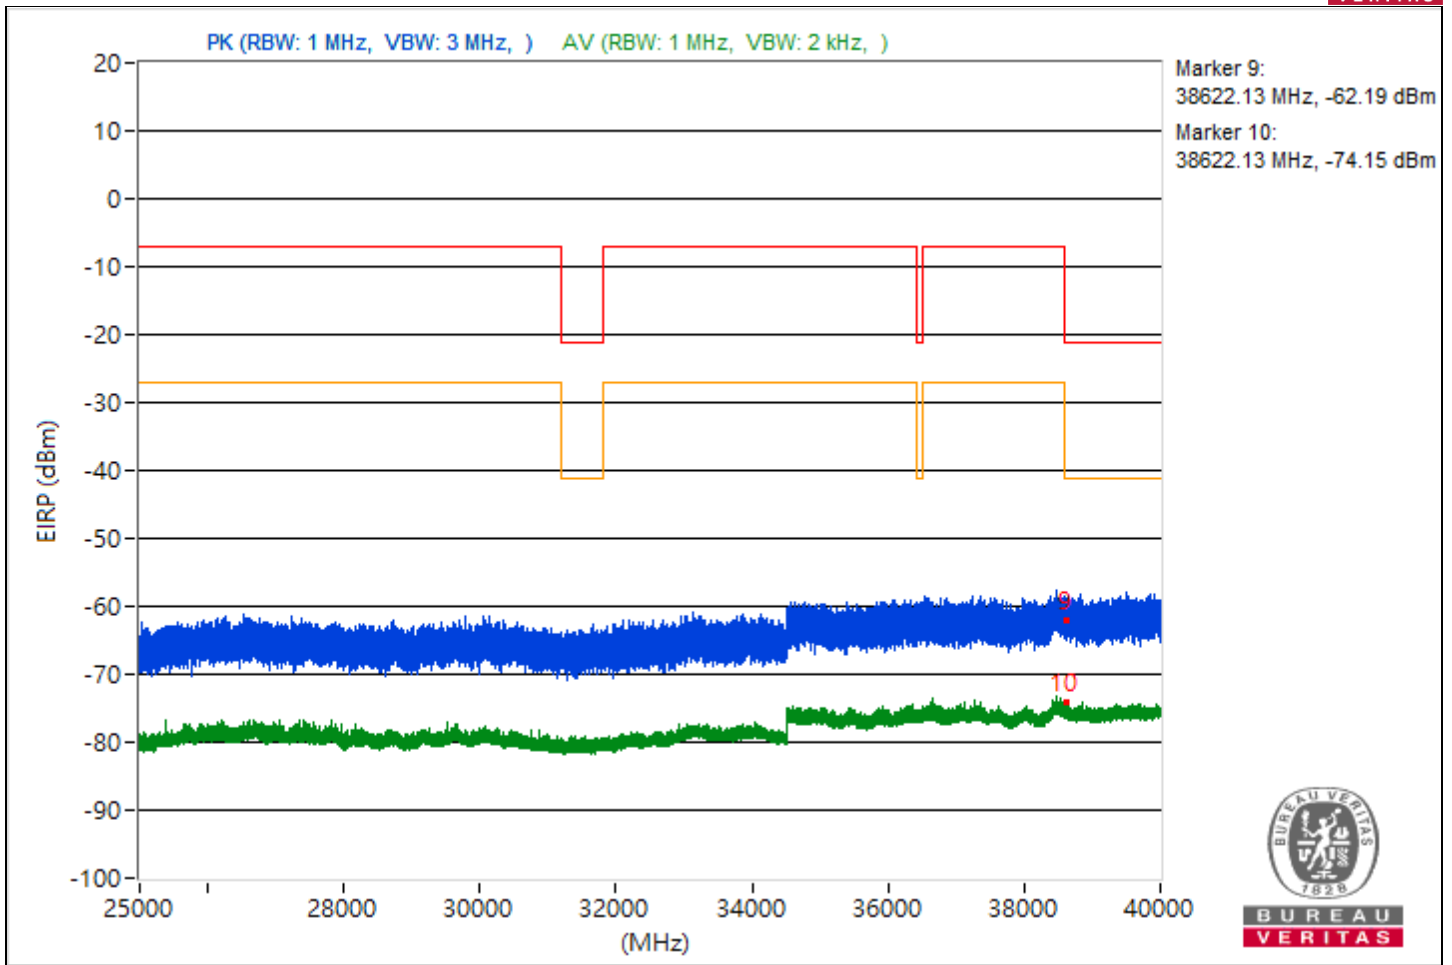


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.91	39.42 PK	74	-34.58	-67.72	-66.77	8.37	-55.84
2	5450.91	33.08 AV	54	-20.92	-74.07	-73.11	8.37	-62.18
3	7250.77	40.03 PK	74	-33.97	-65.76	-67.68	8.37	-55.23
4	7250.77	32.7 AV	54	-21.3	-74.59	-73.38	8.37	-62.56
5	21229.6	38.92 PK	74	-35.08	-69.98	-66.24	8.37	-56.34
6	21229.6	25.64 AV	54	-28.36	-83.27	-79.51	8.37	-69.62
7	23927	39.82 PK	74	-34.18	-65.99	-67.84	8.37	-55.44
8	23927	27.21 AV	54	-26.79	-81.38	-78.09	8.37	-68.05
9	39484.98	32.99 PK	74	-41.01	-73.11	-74.26	8.37	-62.27
10	39484.98	20.89 AV	54	-33.11	-87.42	-84.55	8.37	-74.37

Note: Margin value = Emission Level - Limit value

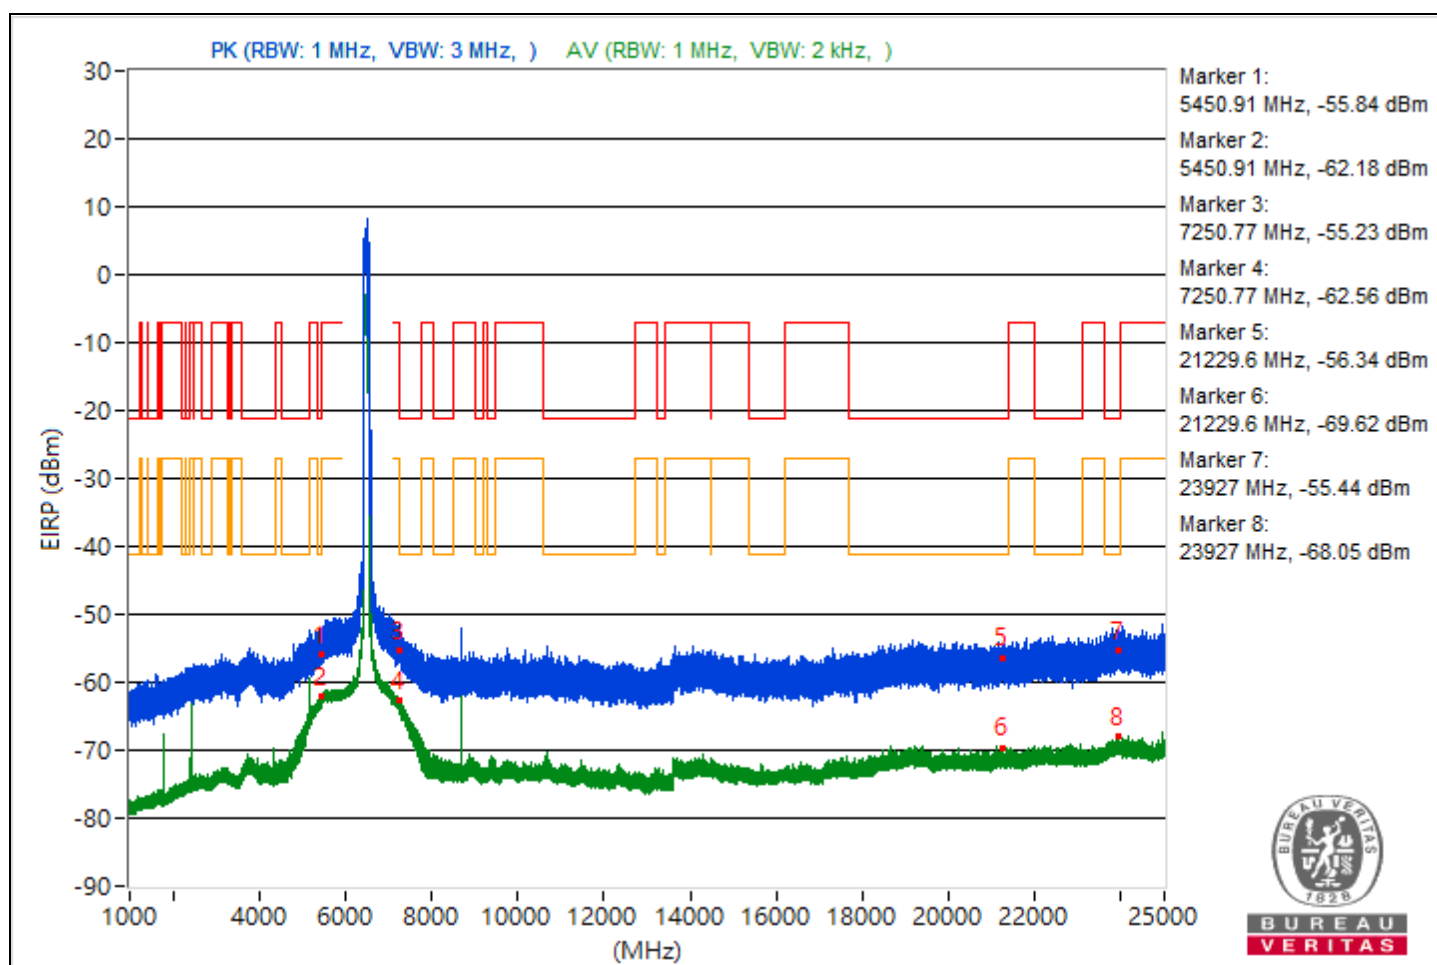


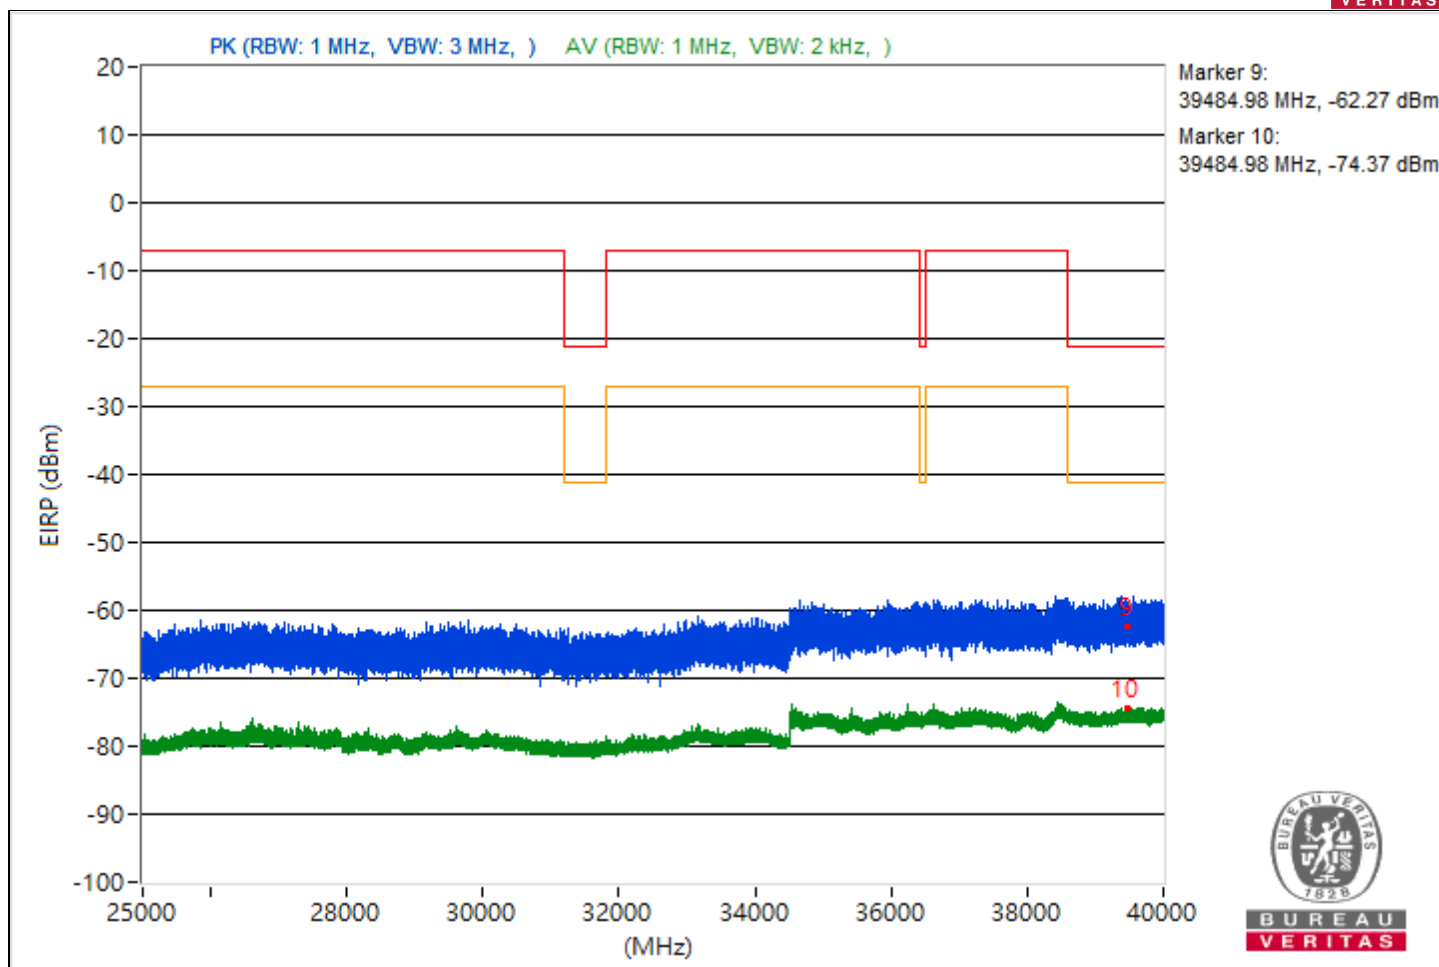


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.97	40.33 PK	74	-33.67	-67.02	-65.71	8.37	-54.93
2	5455.97	32.91 AV	54	-21.09	-73.26	-74.26	8.37	-62.35
3	7251	42.31 PK	74	-31.69	-64.61	-64.07	8.37	-52.95
4	7251	33.51 AV	54	-20.49	-74.01	-72.4	8.37	-61.75
5	19122.9	37.32 PK	74	-36.68	-68.3	-70.66	8.37	-57.94
6	19122.9	25.43 AV	54	-28.57	-79.86	-83.19	8.37	-69.83
7	23901.6	39.7 PK	74	-34.3	-68.7	-65.69	8.37	-55.56
8	23901.6	27.99 AV	54	-26.01	-80.18	-77.53	8.37	-67.27
9	39715.91	34.09 PK	74	-39.91	-71.36	-74.18	8.37	-61.17
10	39715.91	21.12 AV	54	-32.88	-86.71	-84.58	8.37	-74.14

Note: Margin value = Emission Level - Limit value

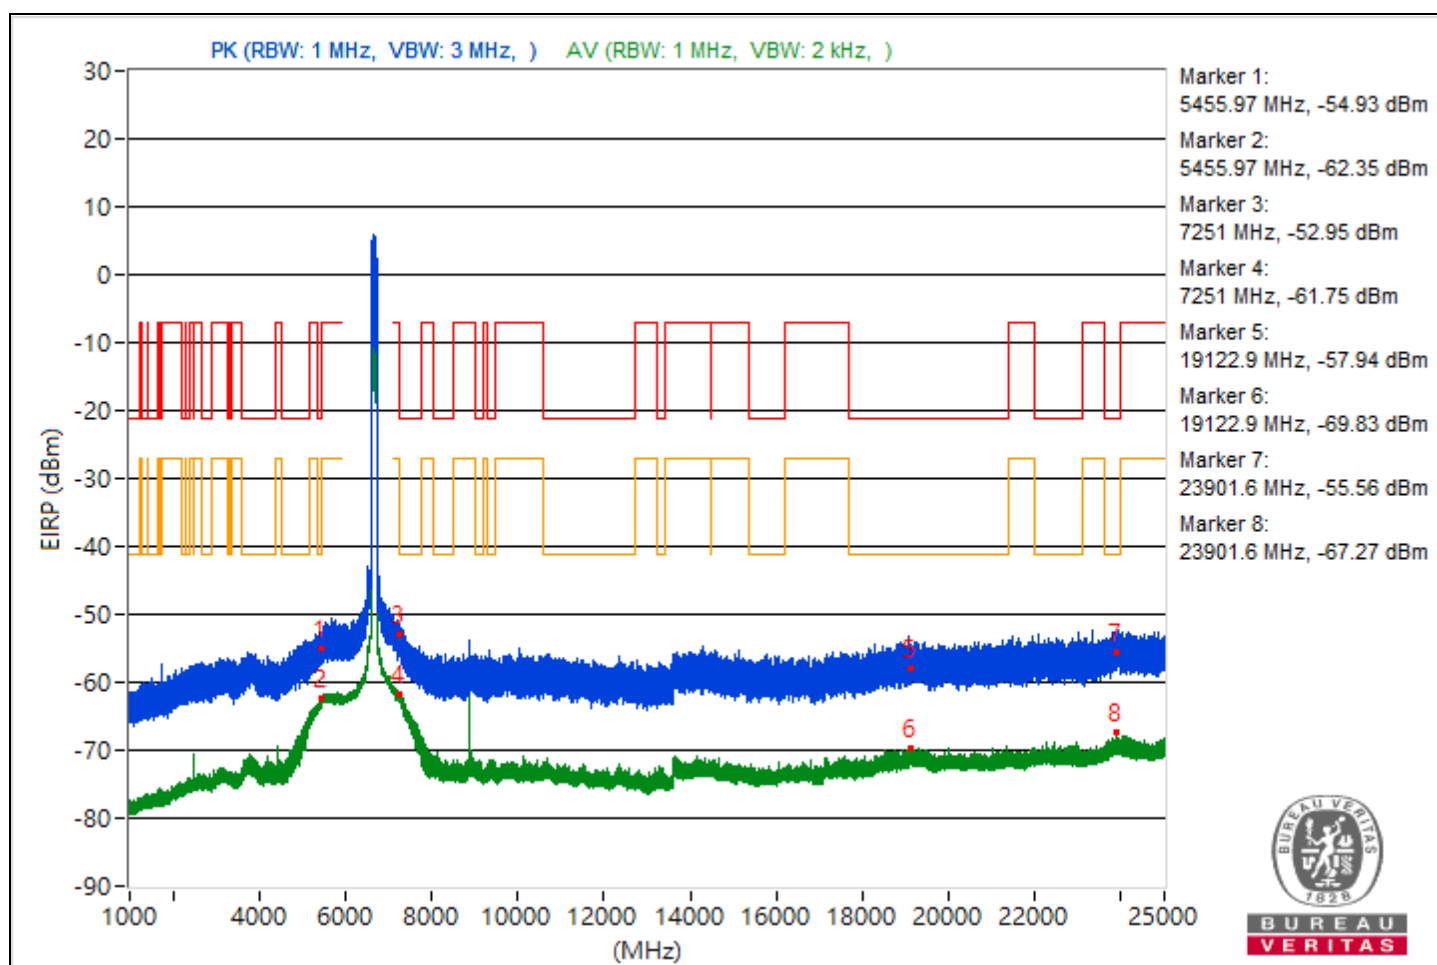


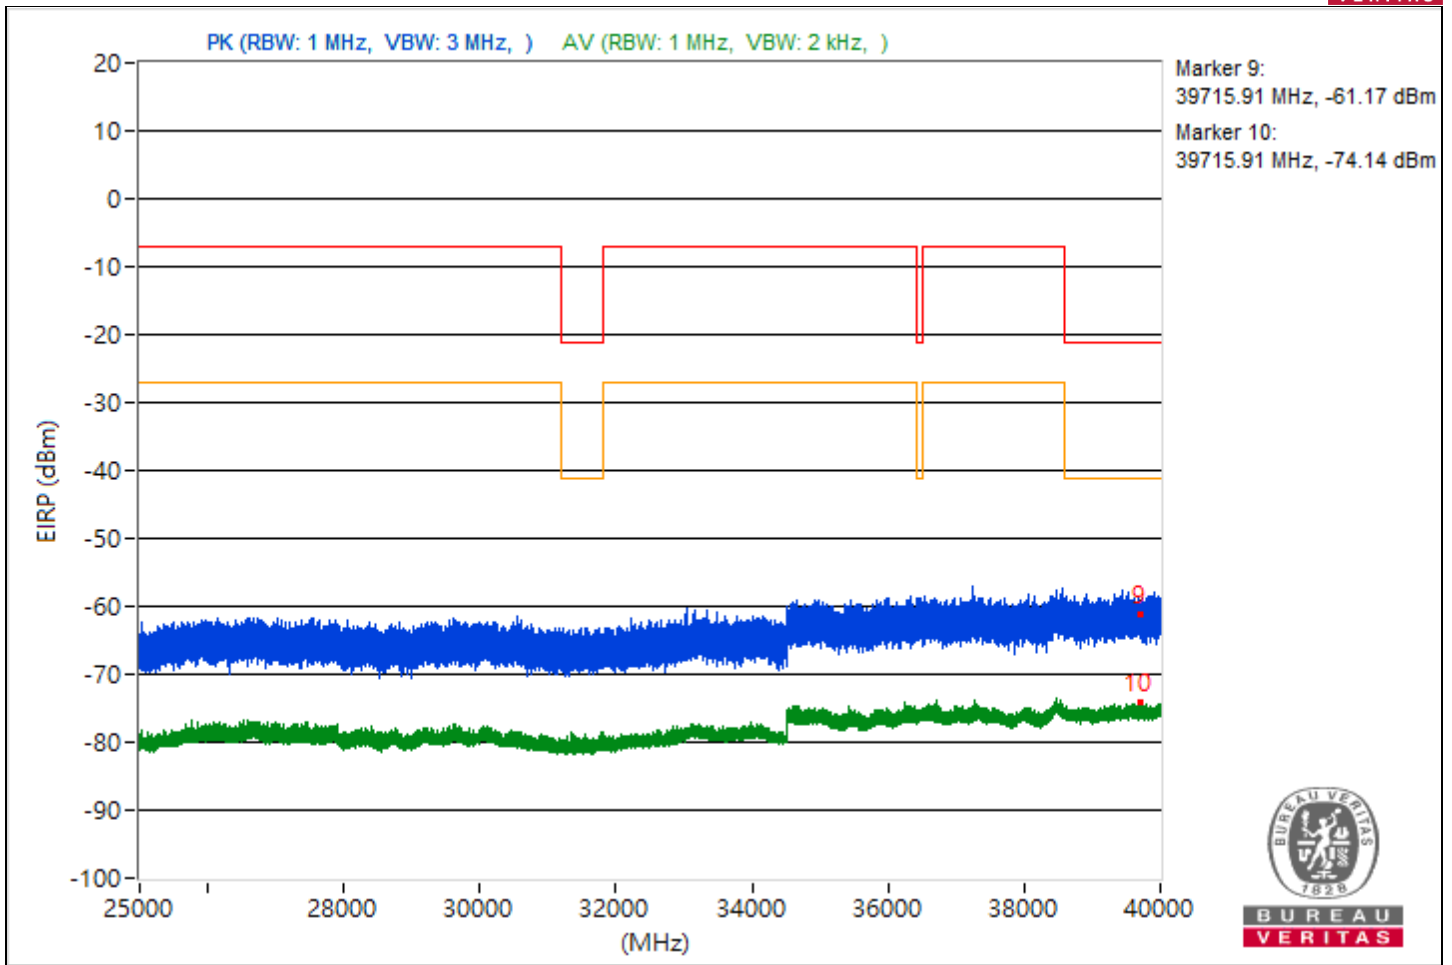


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.34	40.63 PK	74	-33.37	-66.8	-65.35	8.37	-54.63
2	5455.34	33.97 AV	54	-20.03	-72.51	-72.85	8.37	-61.29
3	7255.9	42.87 PK	74	-31.13	-63.4	-64.17	8.37	-52.39
4	7255.9	36.27 AV	54	-17.73	-70.28	-70.47	8.37	-58.99
5	18838.8	37.06 PK	74	-36.94	-71.44	-68.29	8.37	-58.2
6	18838.8	25.58 AV	54	-28.42	-83.18	-79.64	8.37	-69.68
7	23889.7	39.37 PK	74	-34.63	-66.69	-67.96	8.37	-55.89
8	23889.7	27.52 AV	54	-26.48	-77.8	-81.02	8.37	-67.74
9	39761.69	34.56 PK	74	-39.44	-71.52	-72.73	8.37	-60.7
10	39761.69	21.1 AV	54	-32.9	-87.71	-84.1	8.37	-74.16

Note: Margin value = Emission Level - Limit value

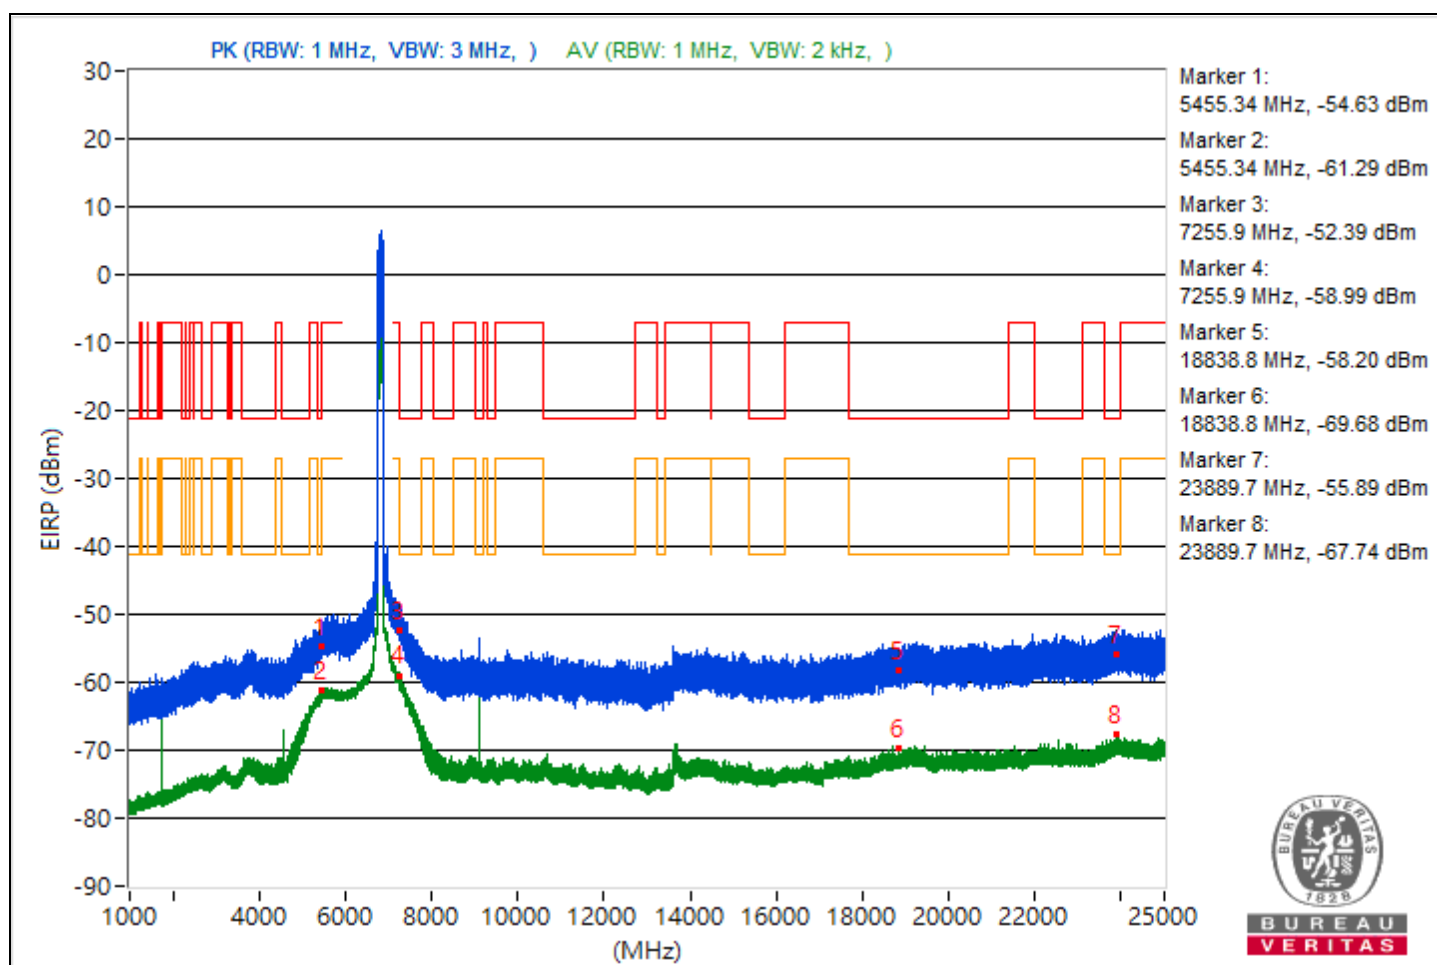

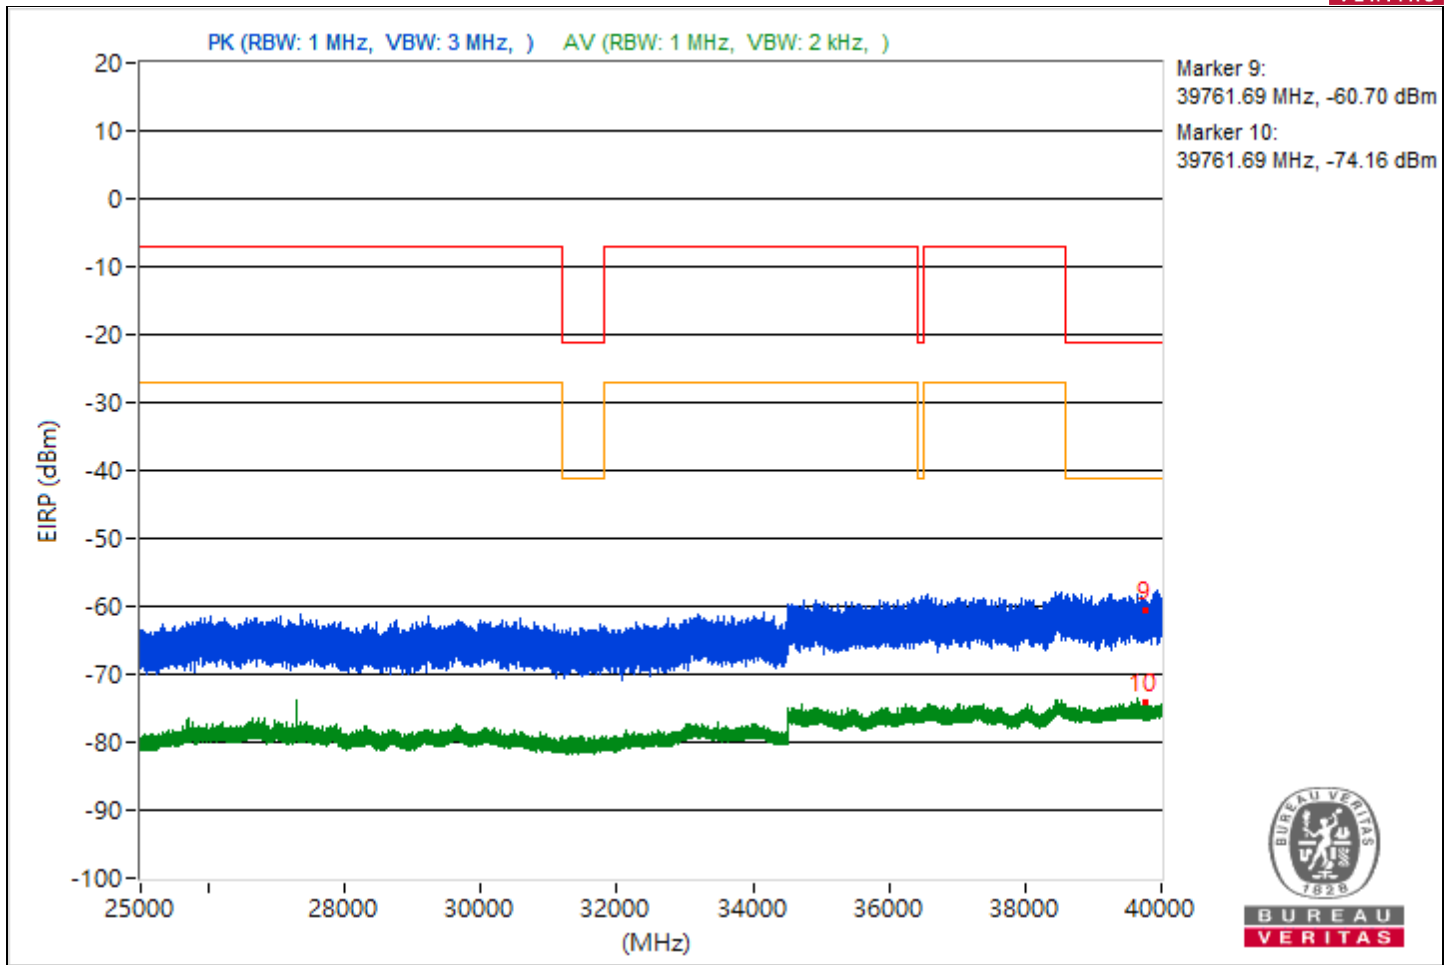



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5414.82	38.89 PK	74	-35.11	-66.82	-68.95	8.37	-56.37
2	5414.82	31.14 AV	54	-22.86	-75.1	-75.95	8.37	-64.12
3	7254.27	42.56 PK	74	-31.44	-63.18	-65.21	8.37	-52.7
4	7254.27	36 AV	54	-18	-70.4	-70.9	8.37	-59.26
5	19133.5	37.85 PK	74	-36.15	-68.17	-69.52	8.37	-57.41
6	19133.5	26.33 AV	54	-27.67	-82.44	-78.89	8.37	-68.93
7	22078.8	39.7 PK	74	-34.3	-69.78	-65.24	8.37	-55.56
8	22078.8	27.1 AV	54	-26.9	-78.08	-81.76	8.37	-68.16
9	39713.16	32.88 PK	74	-41.12	-74.25	-73.33	8.37	-62.38
10	39713.16	21.19 AV	54	-32.81	-85.84	-85.09	8.37	-74.07

Note: Margin value = Emission Level - Limit value

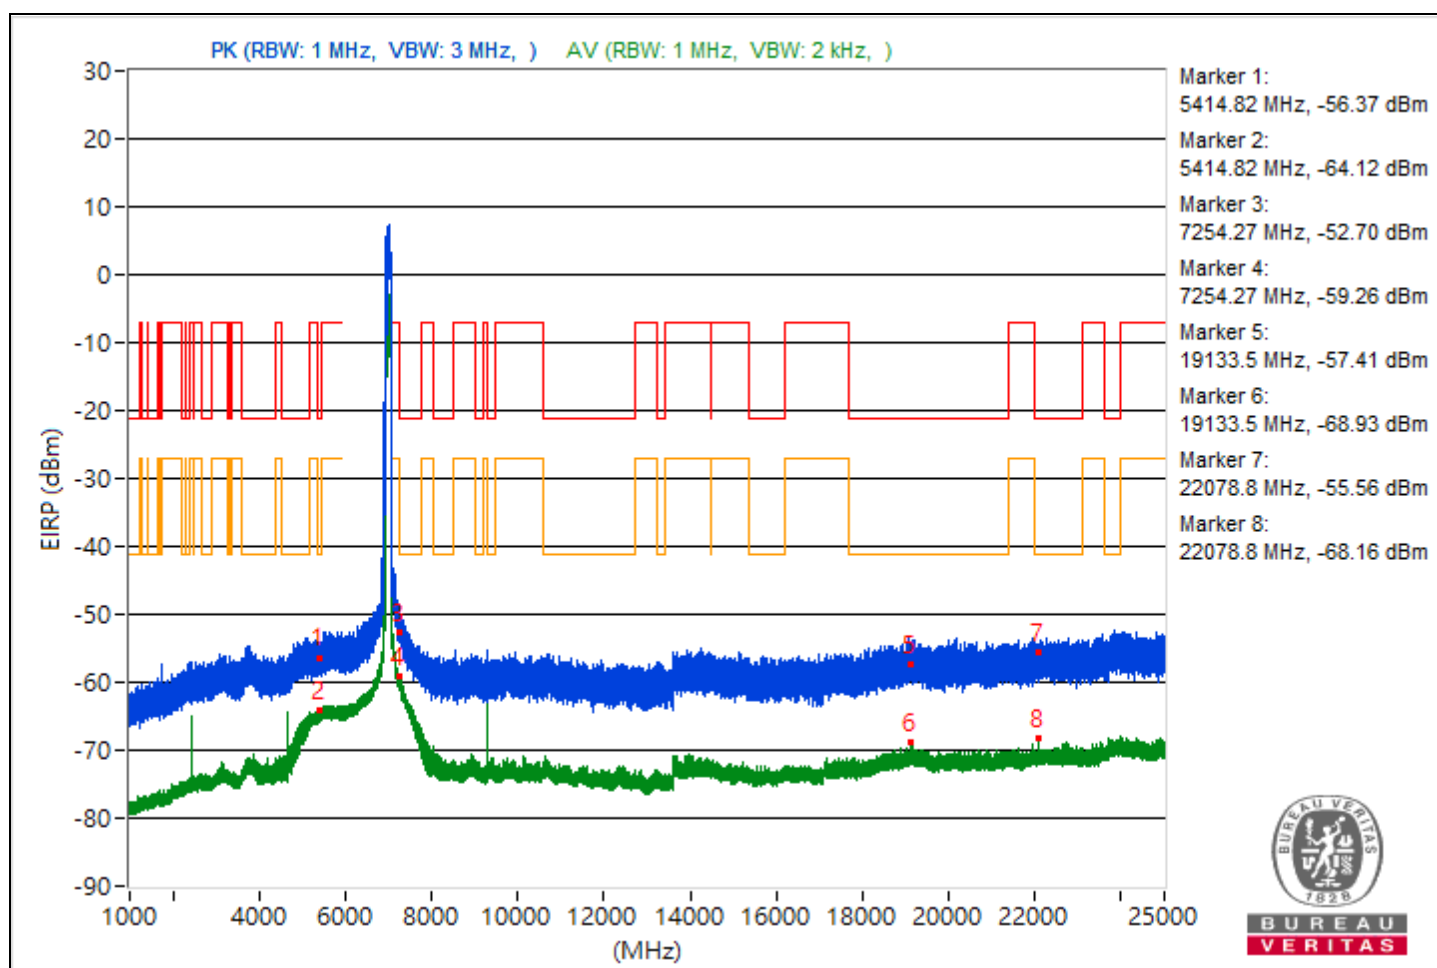

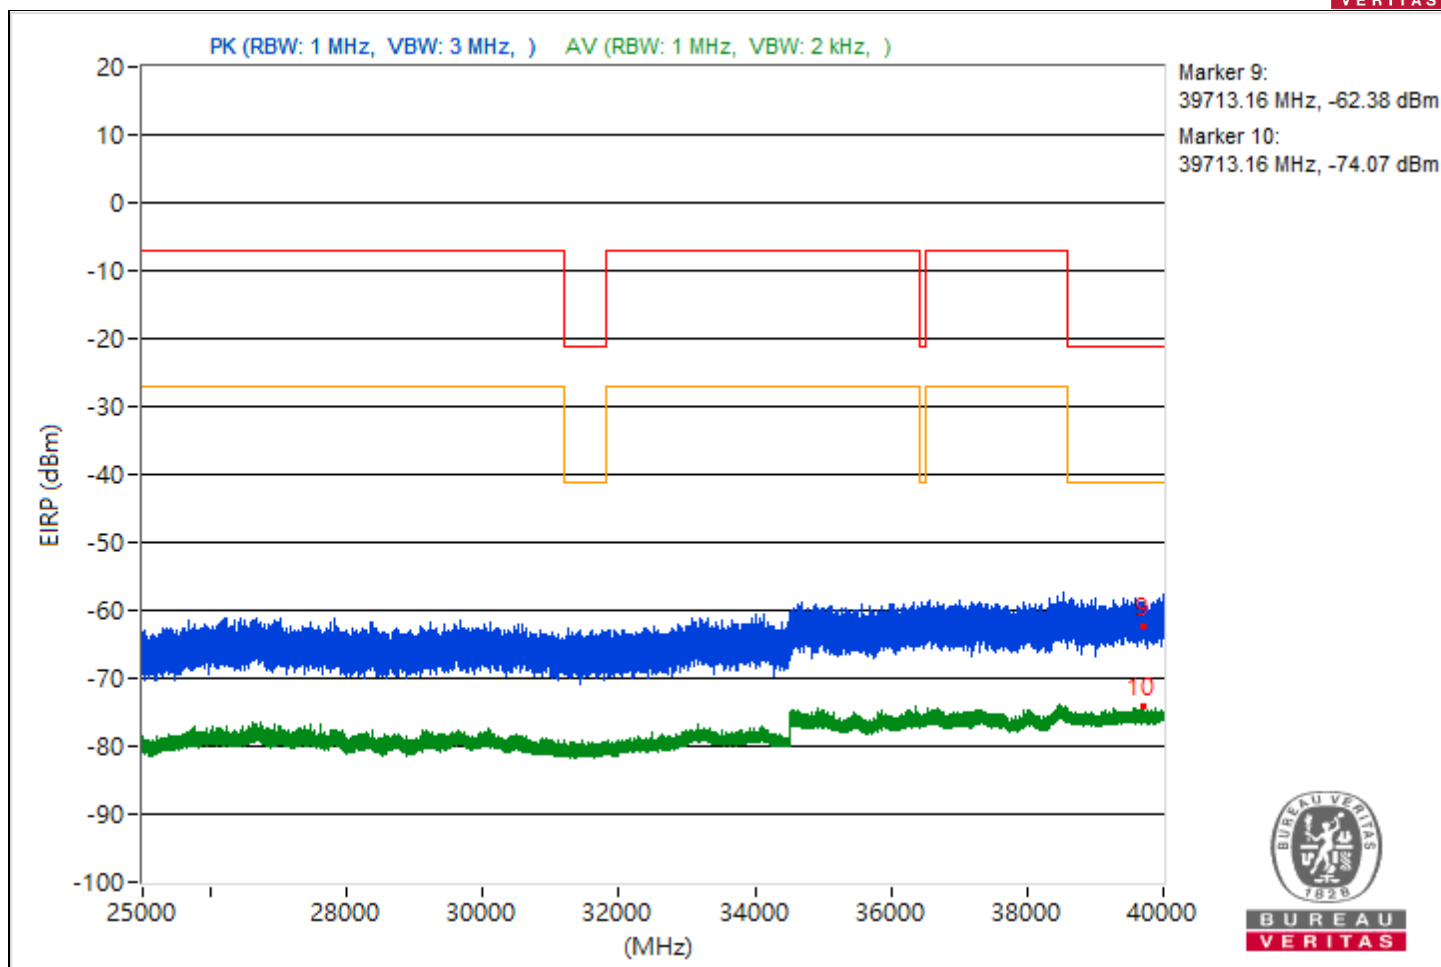

Conducted Band Edges


2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.15	98.97 PK			-10.52	-10.84	11.38	3.71
2	*5954.15	91.22 AV			-18.38	-18.48	11.38	-4.04
3	#5914.35	49.11 PK	88.26	-39.15	-59.55	-61.81	11.38	-46.15
4	#5914.35	36.24 AV	68.26	-32.02	-72.58	-74.43	11.38	-59.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

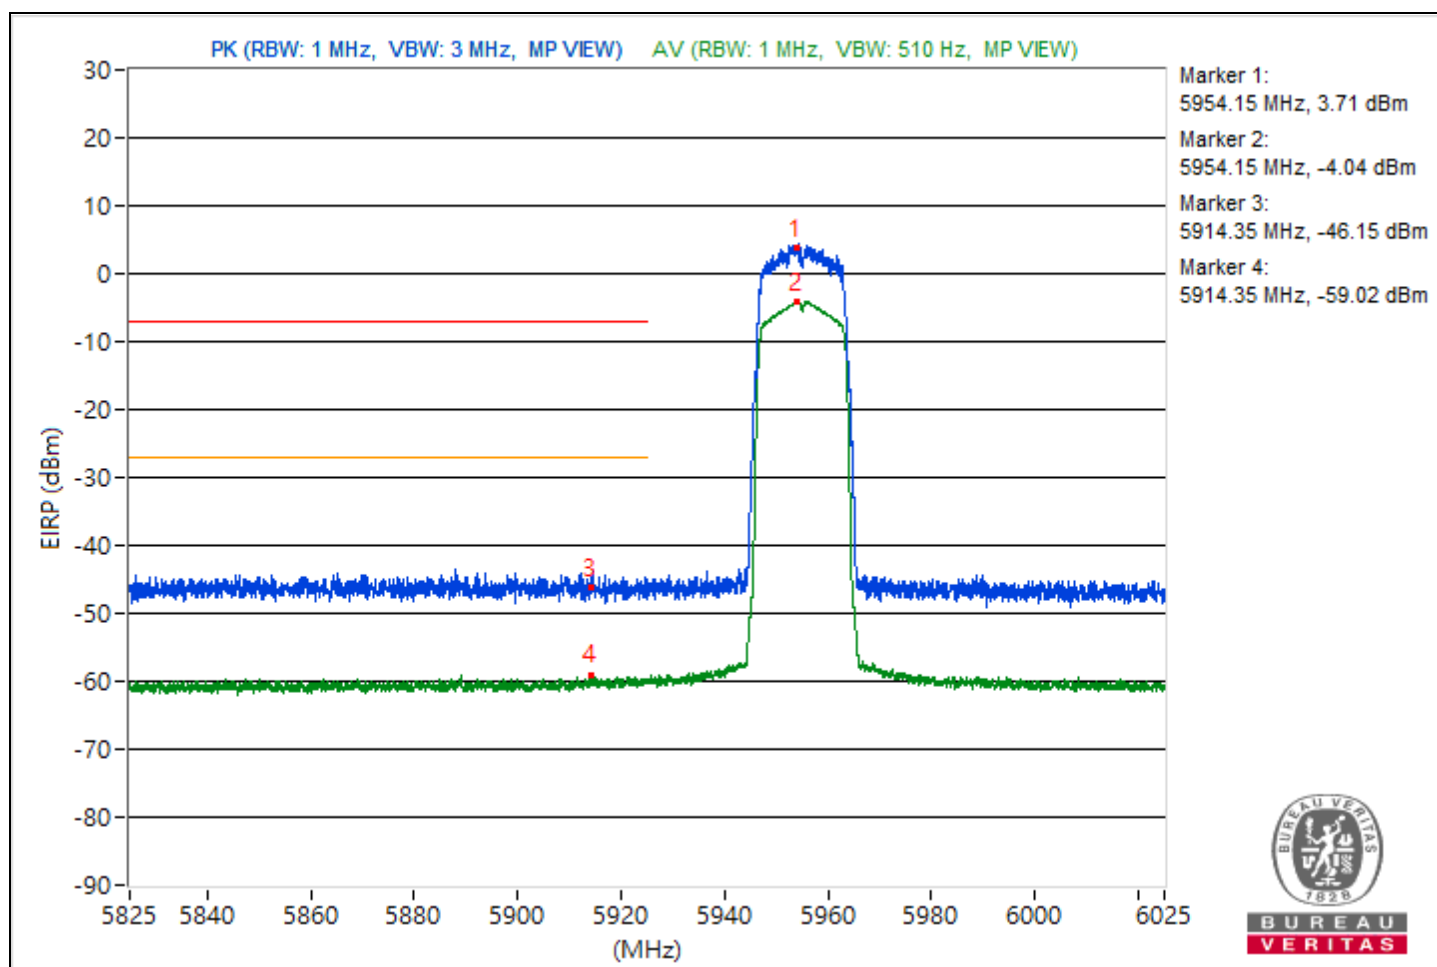


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.02	100.05 PK			-9.88	-9.34	11.38	4.79
2	*7116.02	91.47 AV			-17.65	-18.78	11.38	-3.79
3	#7125	61.05 PK	88.26	-27.21	-48.56	-48.64	11.38	-34.21
4	#7125	46.33 AV	68.26	-21.93	-63.08	-63.56	11.38	-48.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

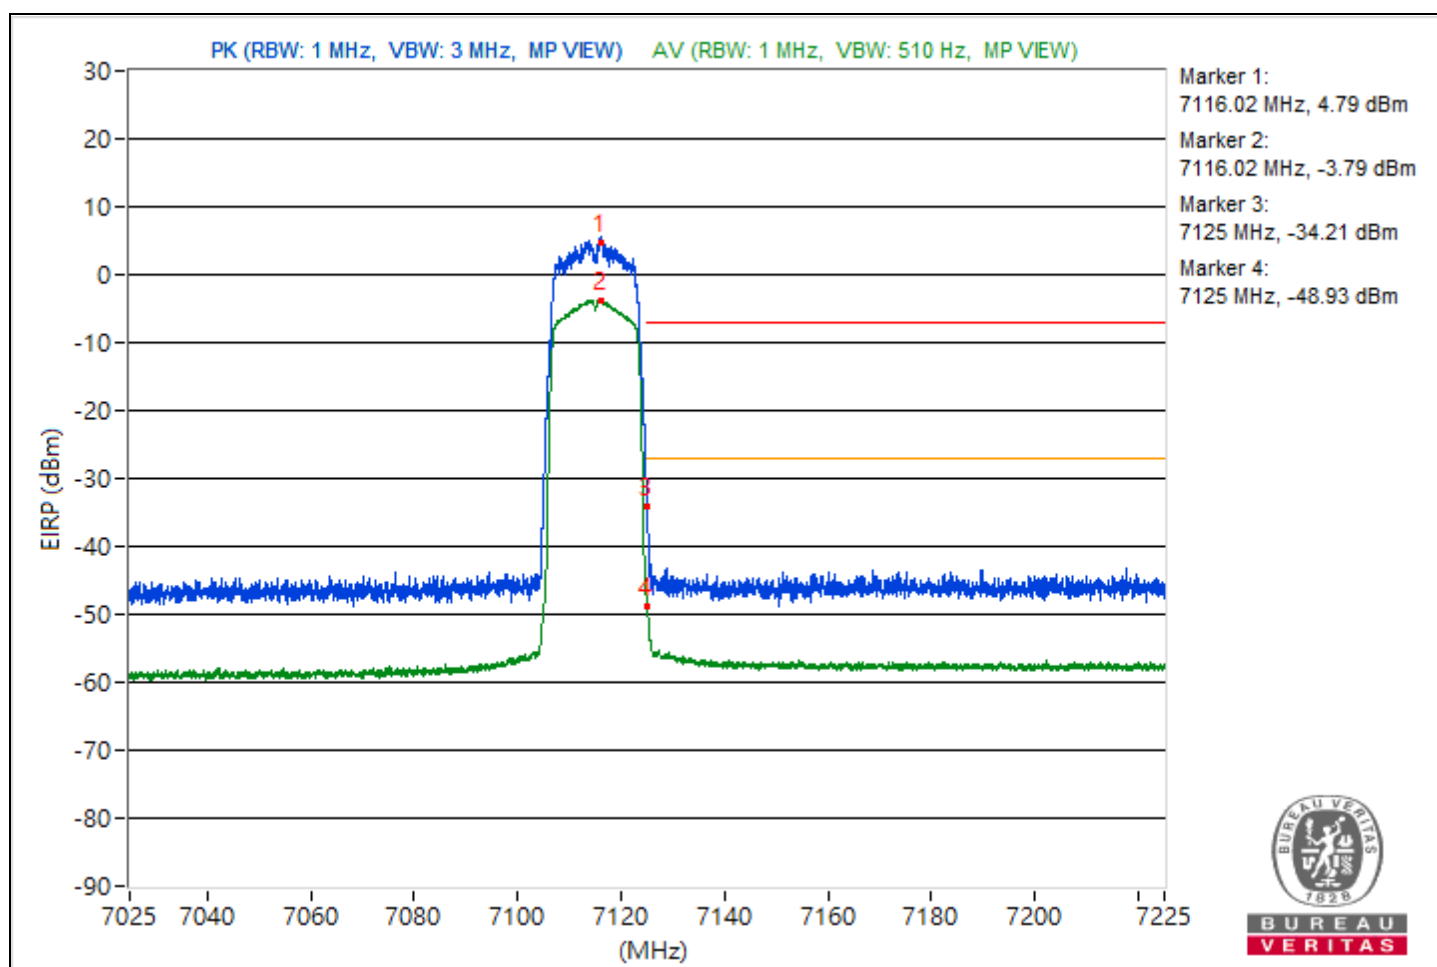


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.3	99.85 PK			-7.22	-6.41	8.37	4.59
2	*5954.3	91.54 AV			-15.03	-15.18	8.37	-3.72
3	#5922.98	46.96 PK	88.26	-41.3	-59.03	-60.45	8.37	-48.3
4	#5922.98	33.91 AV	68.26	-34.35	-72.54	-72.94	8.37	-61.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

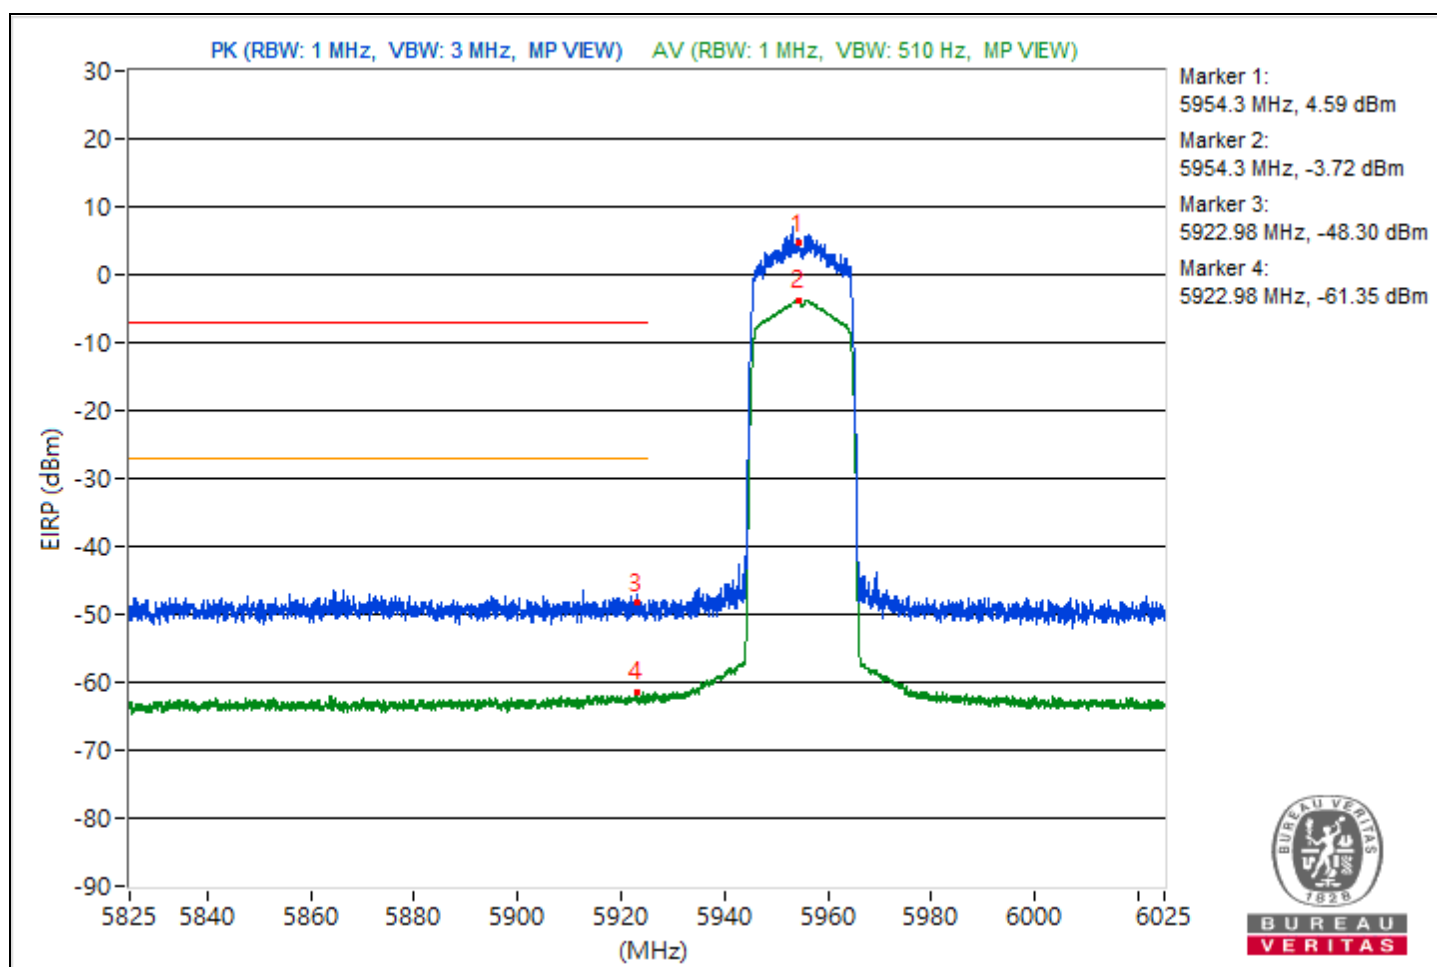

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	57.76 PK	88.26	-30.5	-48.81	-48.96	8.37	-37.5
2	#7125	44.87 AV	68.26	-23.39	-62	-61.56	8.37	-50.39

Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

For Integration method:

Chain 0

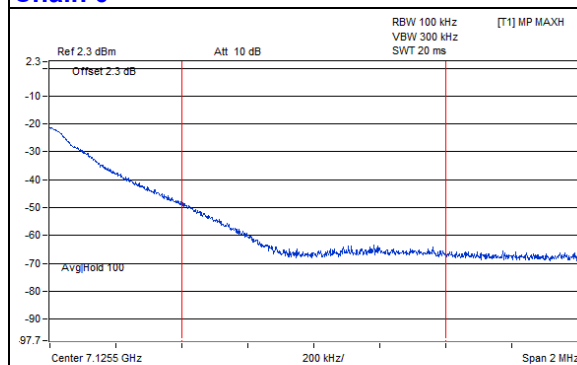


Peak

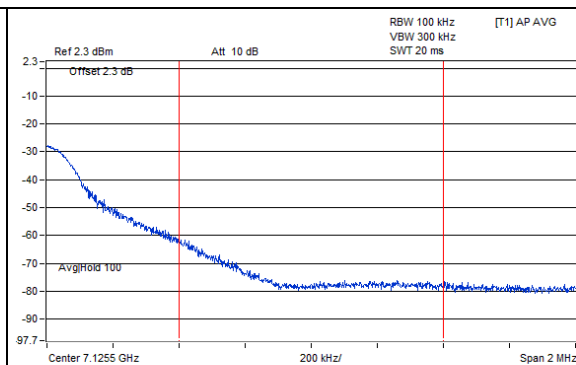


Average

Chain 1

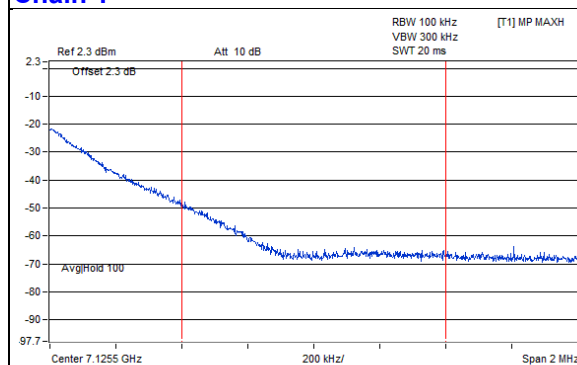

Peak

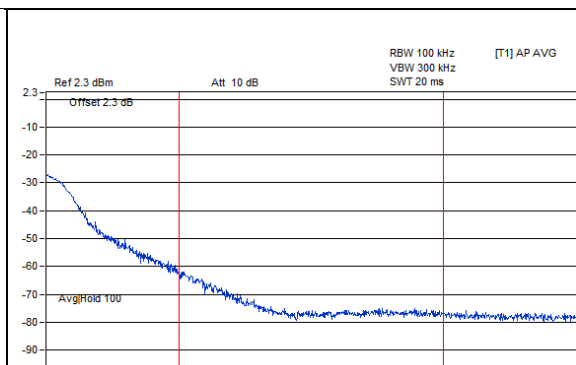


Average

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5964.12	99.26 PK			-7.49	-7.27	8.37	4
2	*5964.12	91.42 AV			-15.44	-15.02	8.37	-3.84
3	#5924.77	47.07 PK	88.26	-41.19	-59.43	-59.72	8.37	-48.19
4	#5924.77	37.12 AV	68.26	-31.14	-69.45	-69.59	8.37	-58.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

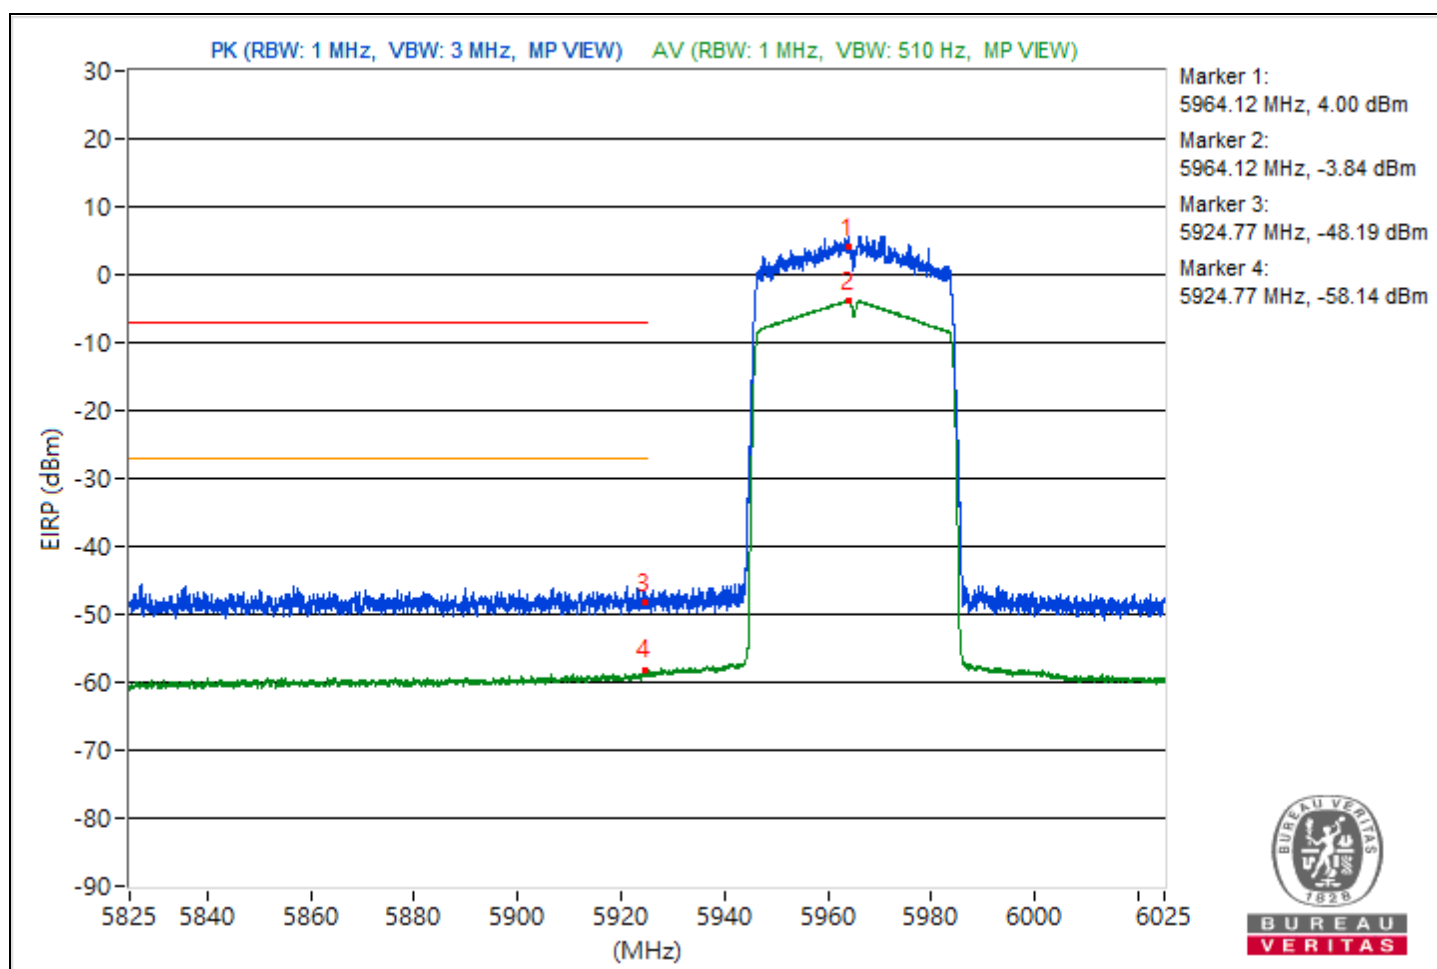


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7083.87	100.34 PK			-7.1	-5.62	8.37	5.08
2	*7083.87	91.8 AV			-14.7	-14.98	8.37	-3.46
3	#7125.02	48.95 PK	88.26	-39.31	-58.19	-57.24	8.37	-46.31
4	#7125.02	38.24 AV	68.26	-30.02	-68.62	-68.19	8.37	-57.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

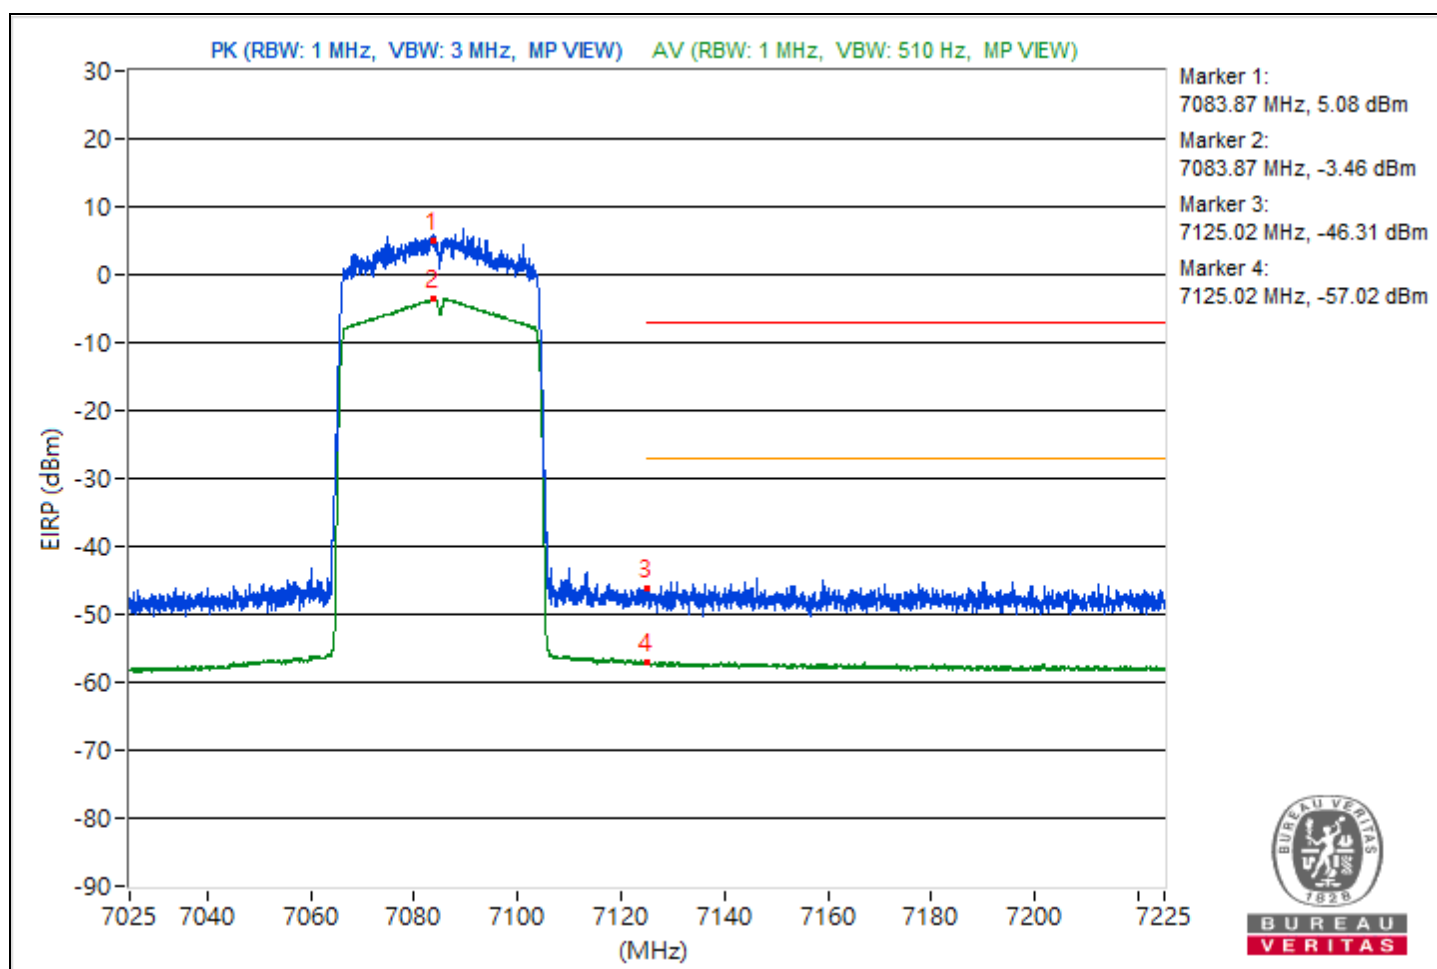


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5986.87	99.87 PK			-6.26	-7.34	8.37	4.61
2	*5986.87	92.25 AV			-14.43	-14.36	8.37	-3.01
3	#5924.45	49.18 PK	88.26	-39.08	-56.68	-58.42	8.37	-46.08
4	#5924.45	40.74 AV	68.26	-27.52	-65.51	-66.32	8.37	-54.52

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

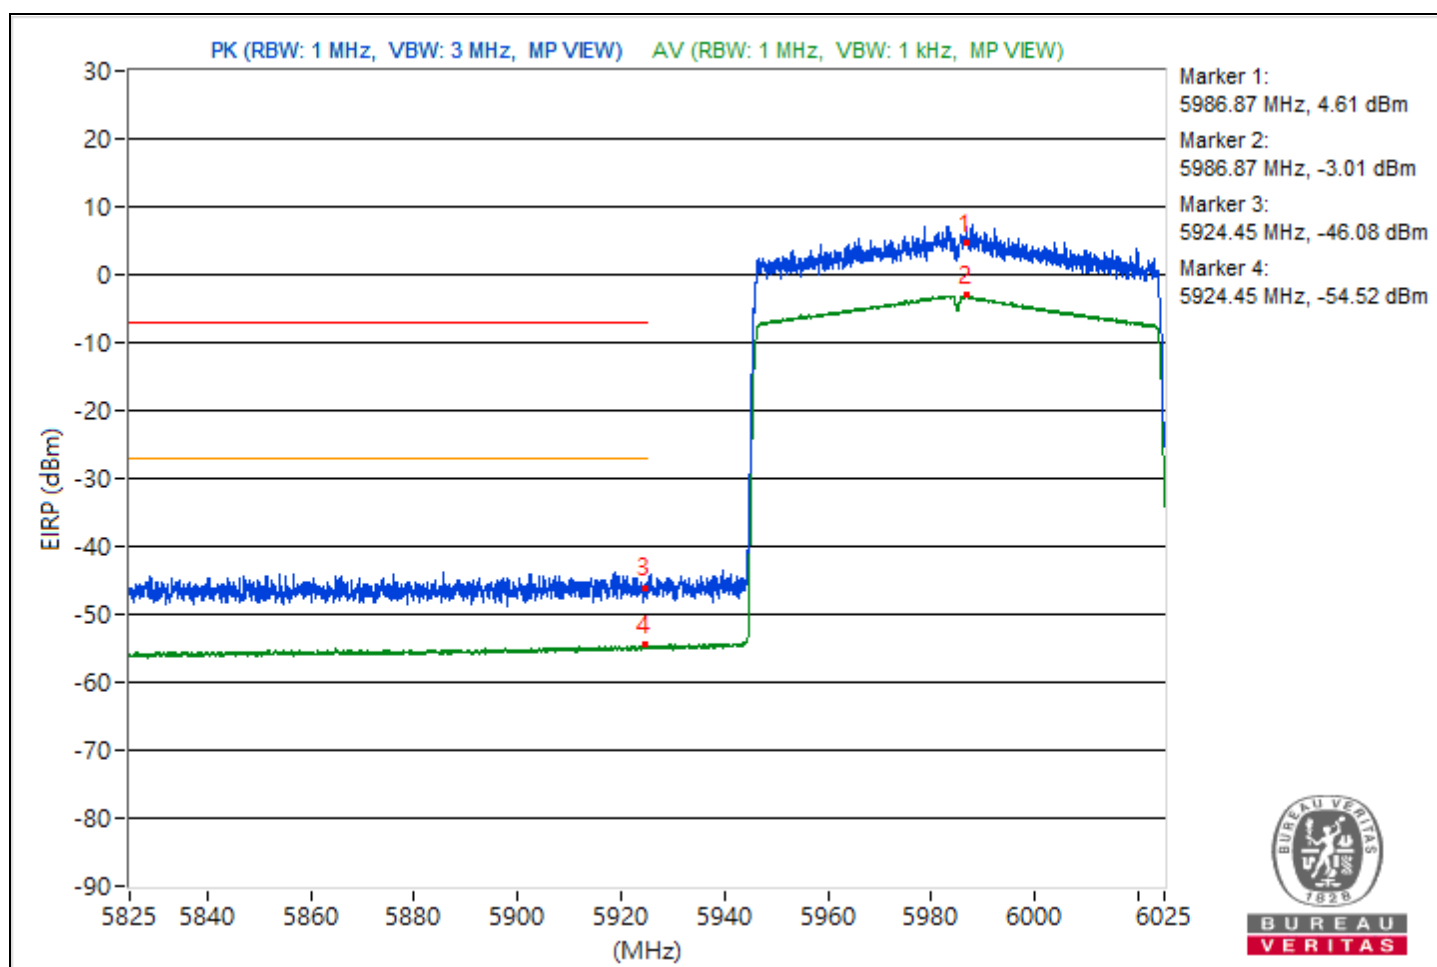


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.98	100.54 PK			-4.63	-8.34	8.37	5.28
2	*7026.98	91.92 AV			-14.63	-14.82	8.37	-3.34
3	#7126.85	49.17 PK	88.26	-39.09	-58.83	-56.43	8.37	-46.09
4	#7126.85	40.78 AV	68.26	-27.48	-65.86	-65.86	8.37	-54.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

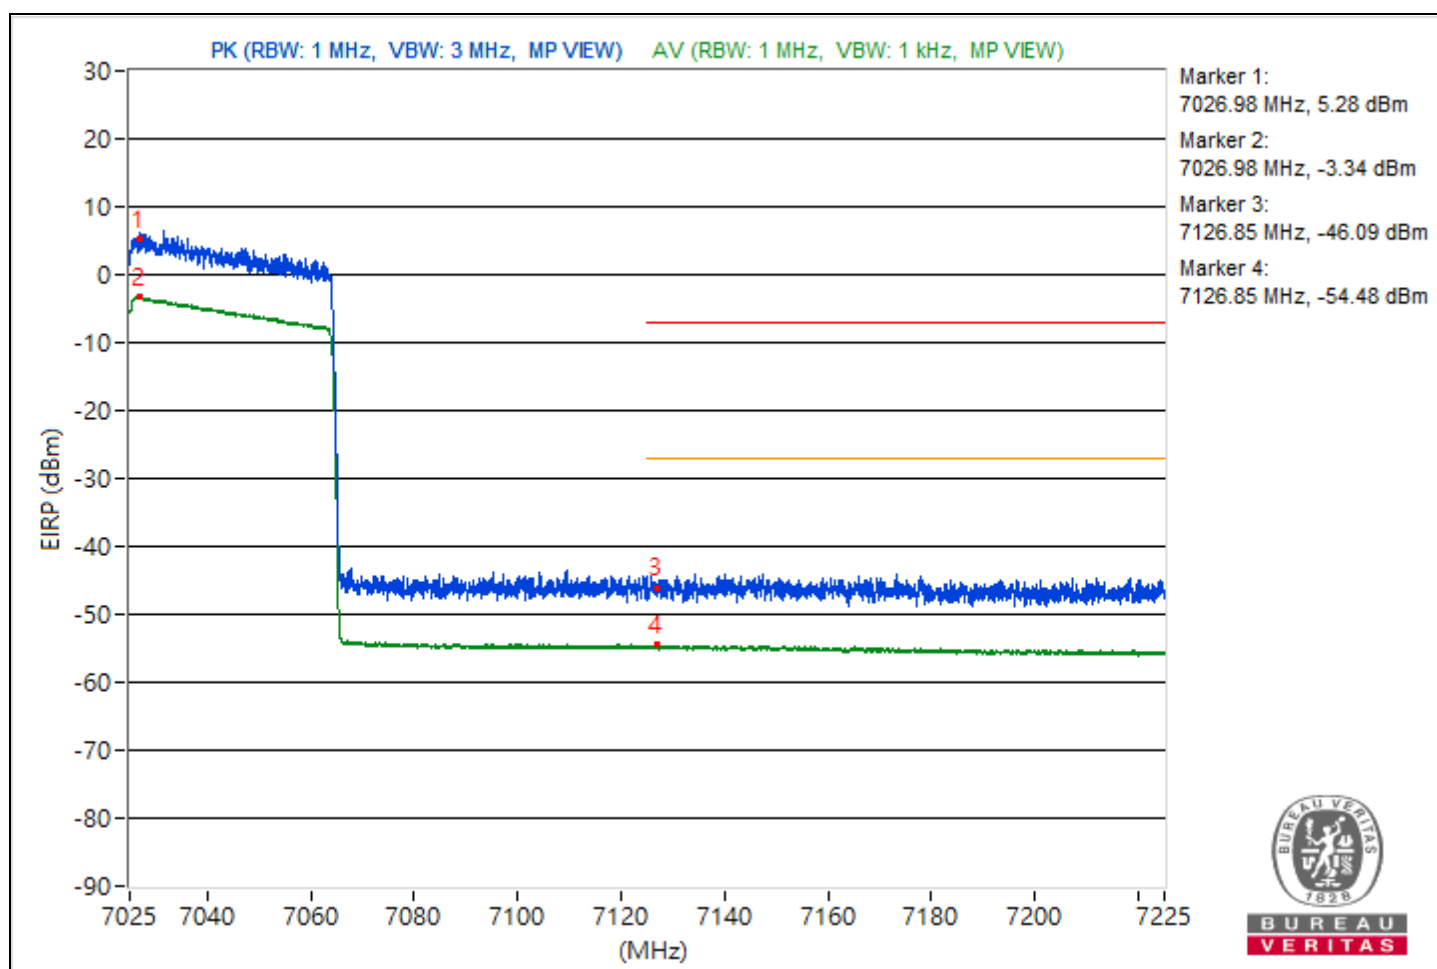


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.62	99.09 PK			-7.51	-7.6	8.37	3.83
2	*6022.62	91.47 AV			-15.11	-15.22	8.37	-3.79
3	#5923.4	50.47 PK	88.26	-37.79	-56.03	-56.33	8.37	-44.79
4	#5923.4	41.79 AV	68.26	-26.47	-64.46	-65.29	8.37	-53.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

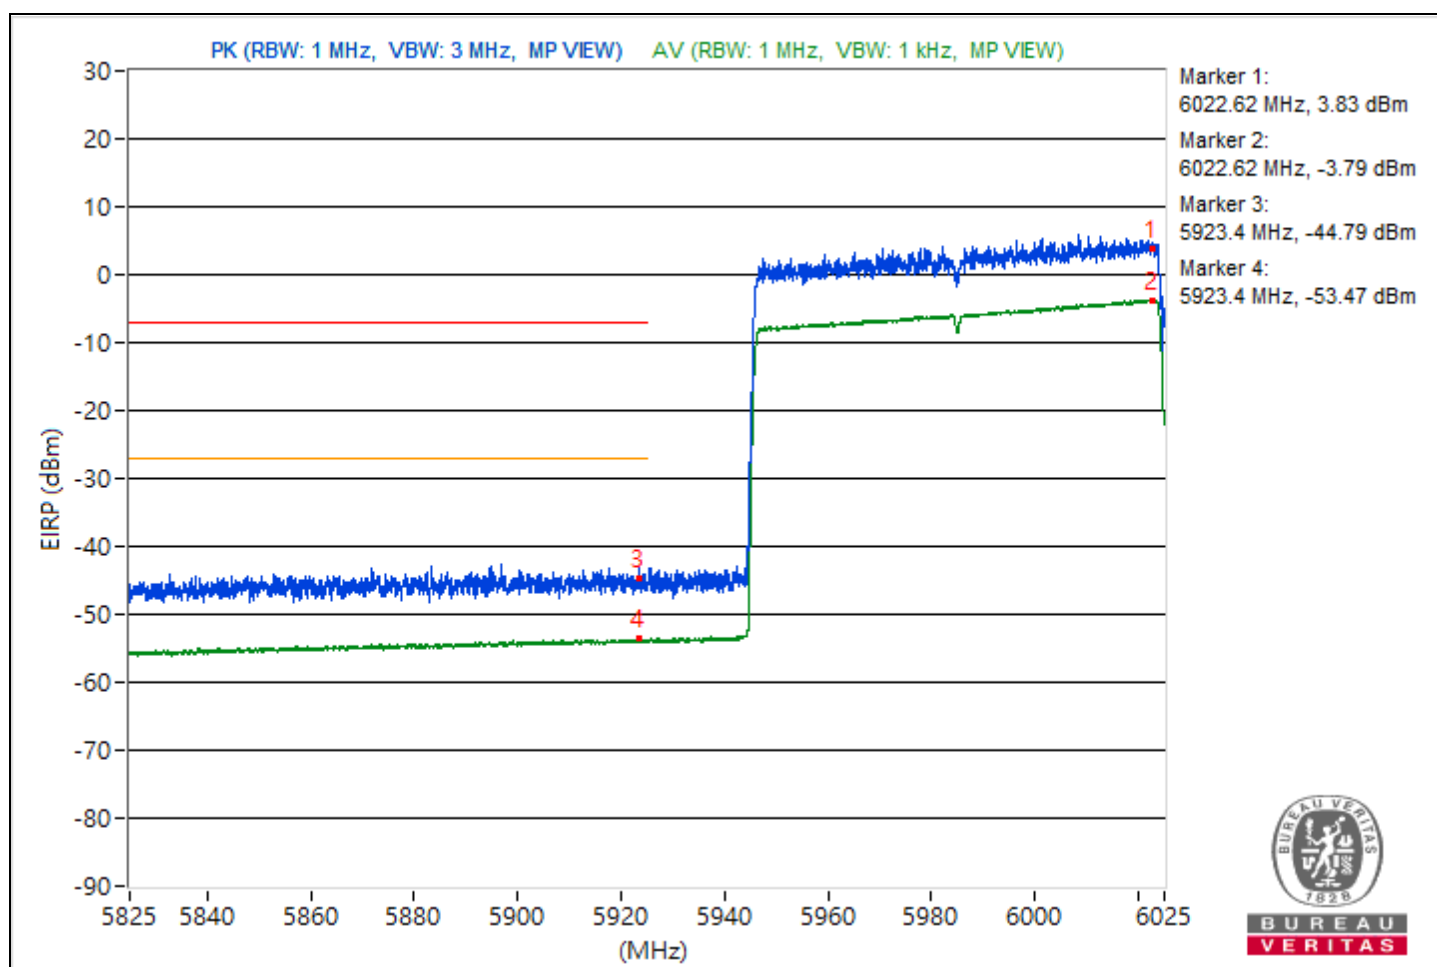


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.48	97.24 PK			-9.39	-9.42	8.37	1.98
2	*7026.48	89.66 AV			-16.62	-17.37	8.37	-5.6
3	#7125.05	51.97 PK	88.26	-36.29	-53.59	-56.11	8.37	-43.29
4	#7125.05	42.59 AV	68.26	-25.67	-63.84	-64.27	8.37	-52.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

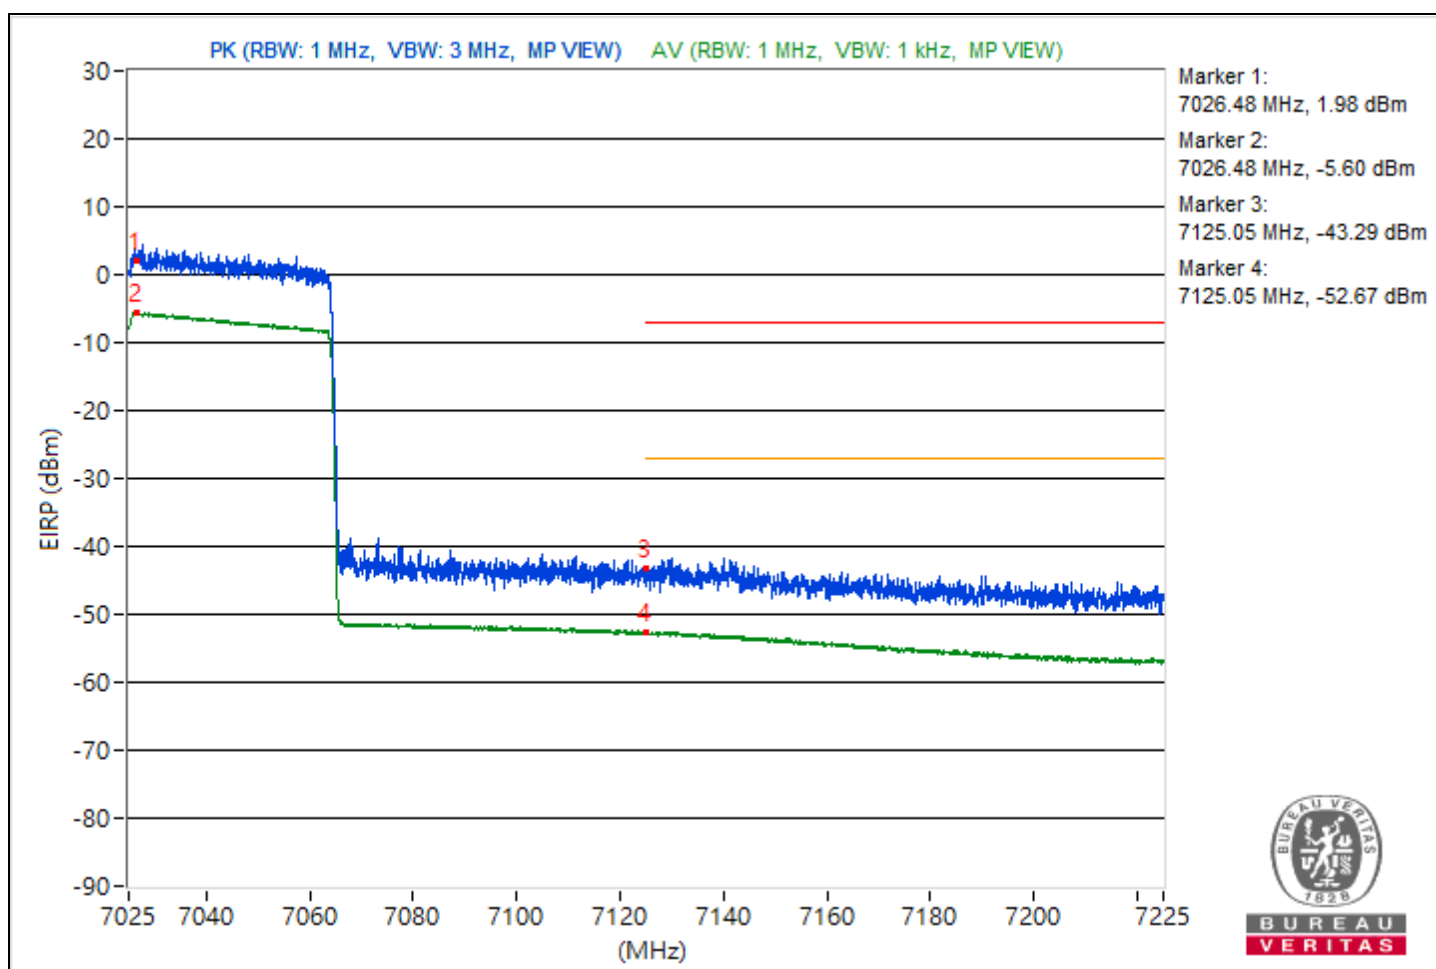


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.48	102.76 PK			-4.79	-3.13	8.37	7.5
2	*5946.48	93.16 AV			-14.27	-12.81	8.37	-2.1
3	#5875.3	58.84 PK	88.26	-29.42	-48.54	-47.17	8.37	-36.42
4	#5875.3	46.61 AV	68.26	-21.65	-60.97	-59.26	8.37	-48.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

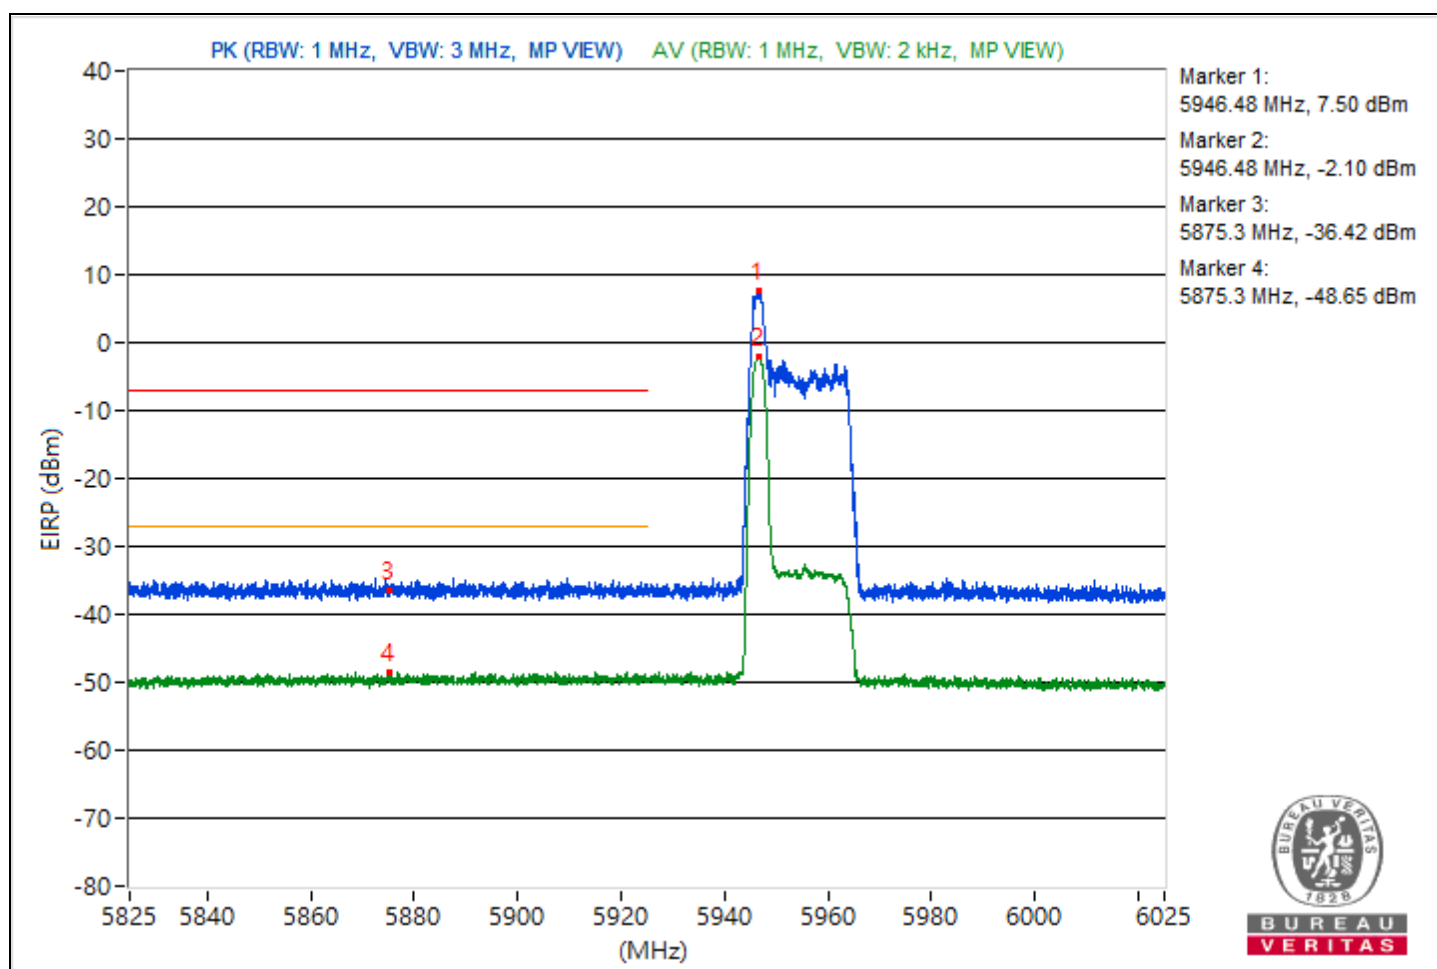

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	73.51 PK	88.26	-14.75	-32.77	-33.53	8.37	-21.75
2	#7125	58.24 AV	68.26	-10.02	-48.38	-48.42	8.37	-37.02

Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

For Integration method:

Chain 0

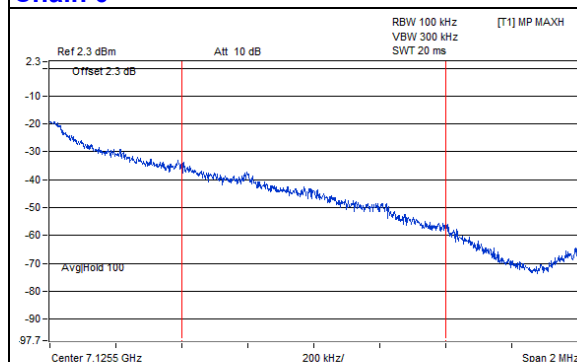


Peak

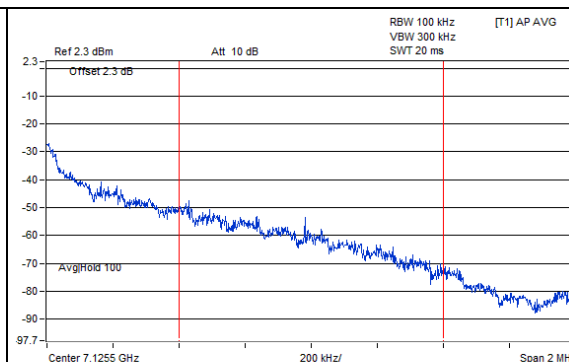


Average

Chain 1

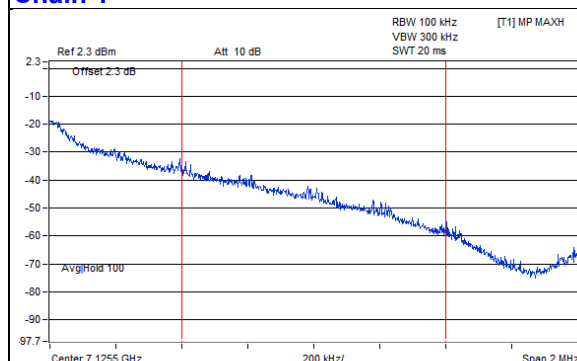

Peak

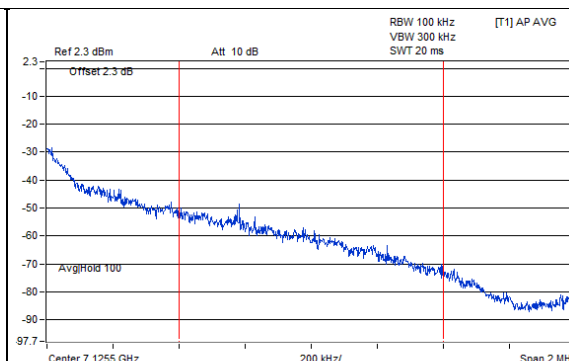


Average

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.18	103.02 PK			-3.29	-3.98	8.37	7.76
2	*5947.18	94.2 AV			-12.33	-12.54	8.37	-1.06
3	#5887.6	59.14 PK	88.26	-29.12	-46.49	-48.83	8.37	-36.12
4	#5887.6	46.75 AV	68.26	-21.51	-58.94	-61.1	8.37	-48.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

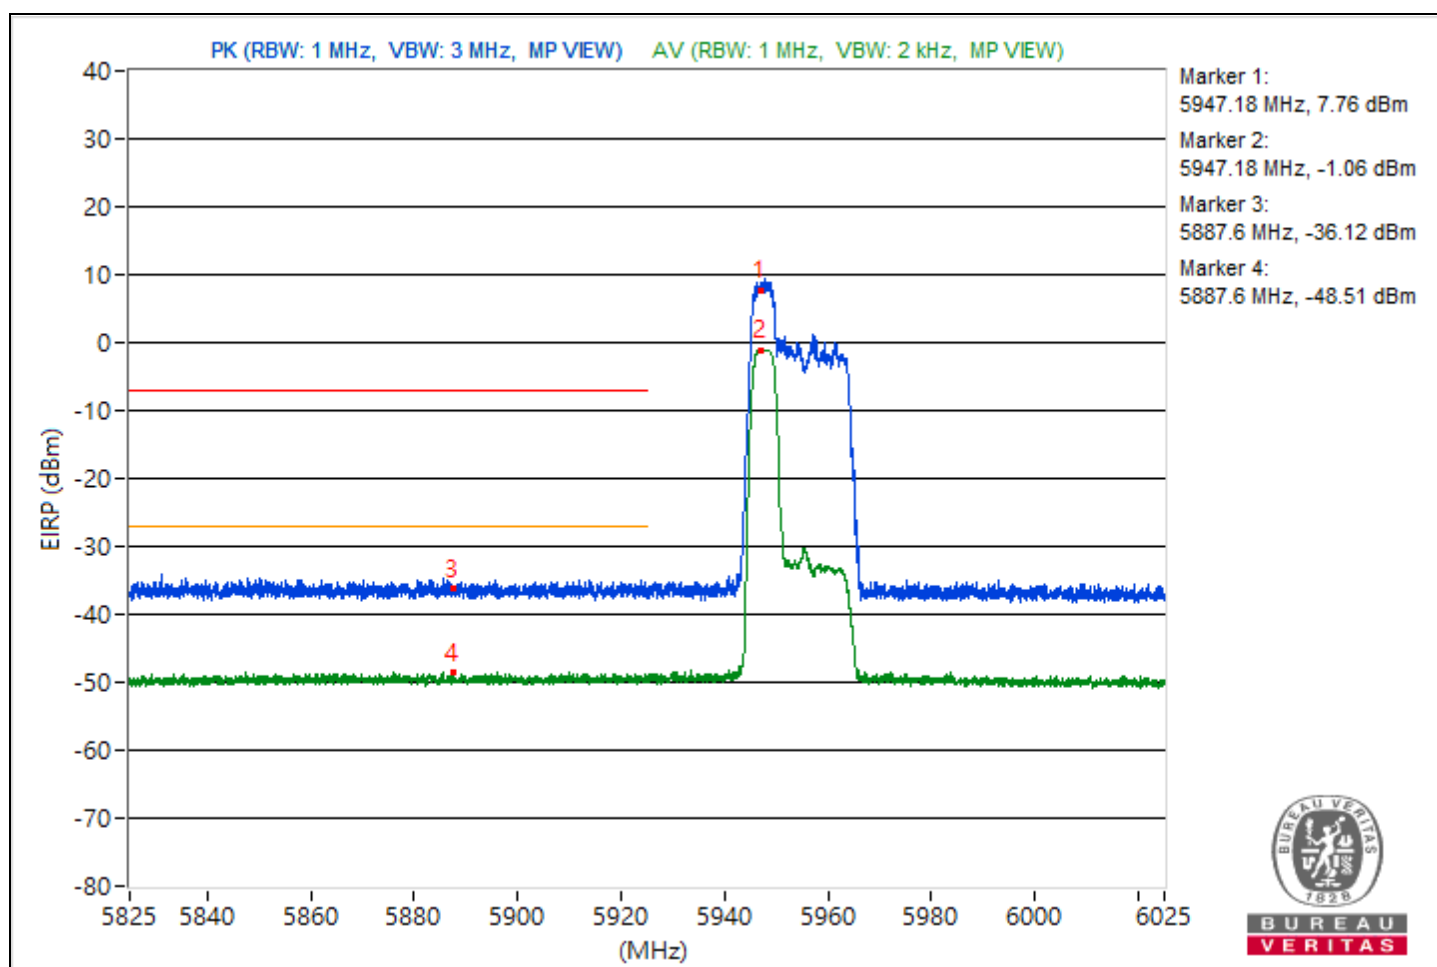

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	73.71 PK	88.26	-14.55	-32.59	-33.31	8.37	-21.55
2	#7125	58.44 AV	68.26	-9.82	-48.19	-48.22	8.37	-36.82

Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

For Integration method:

Chain 0

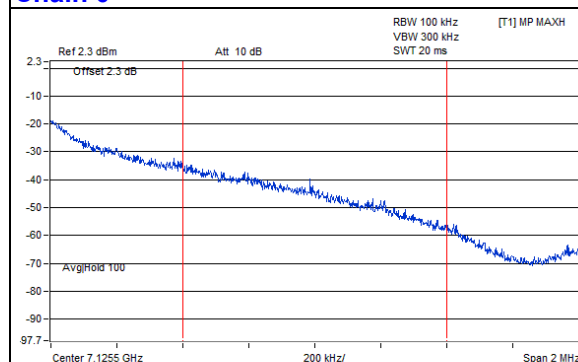


Peak

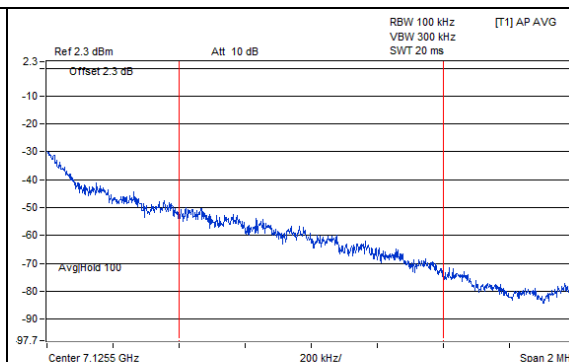


Average



Chain 1

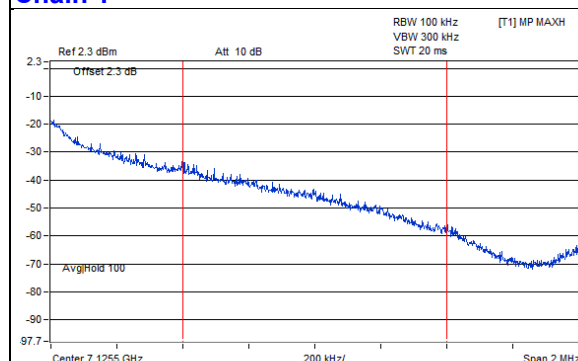

Peak

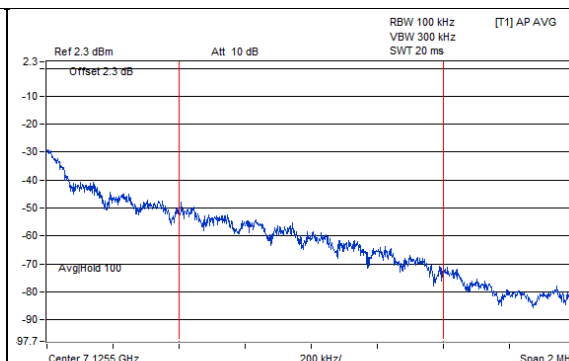

Average




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5949.95	102.58 PK			-3.07	-5.33	8.37	7.32
2	*5949.95	93.76 AV			-12.87	-12.88	8.37	-1.5
3	#5924.32	58.39 PK	88.26	-29.87	-48.03	-48.48	8.37	-36.87
4	#5924.32	46.22 AV	68.26	-22.04	-61.21	-59.76	8.37	-49.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

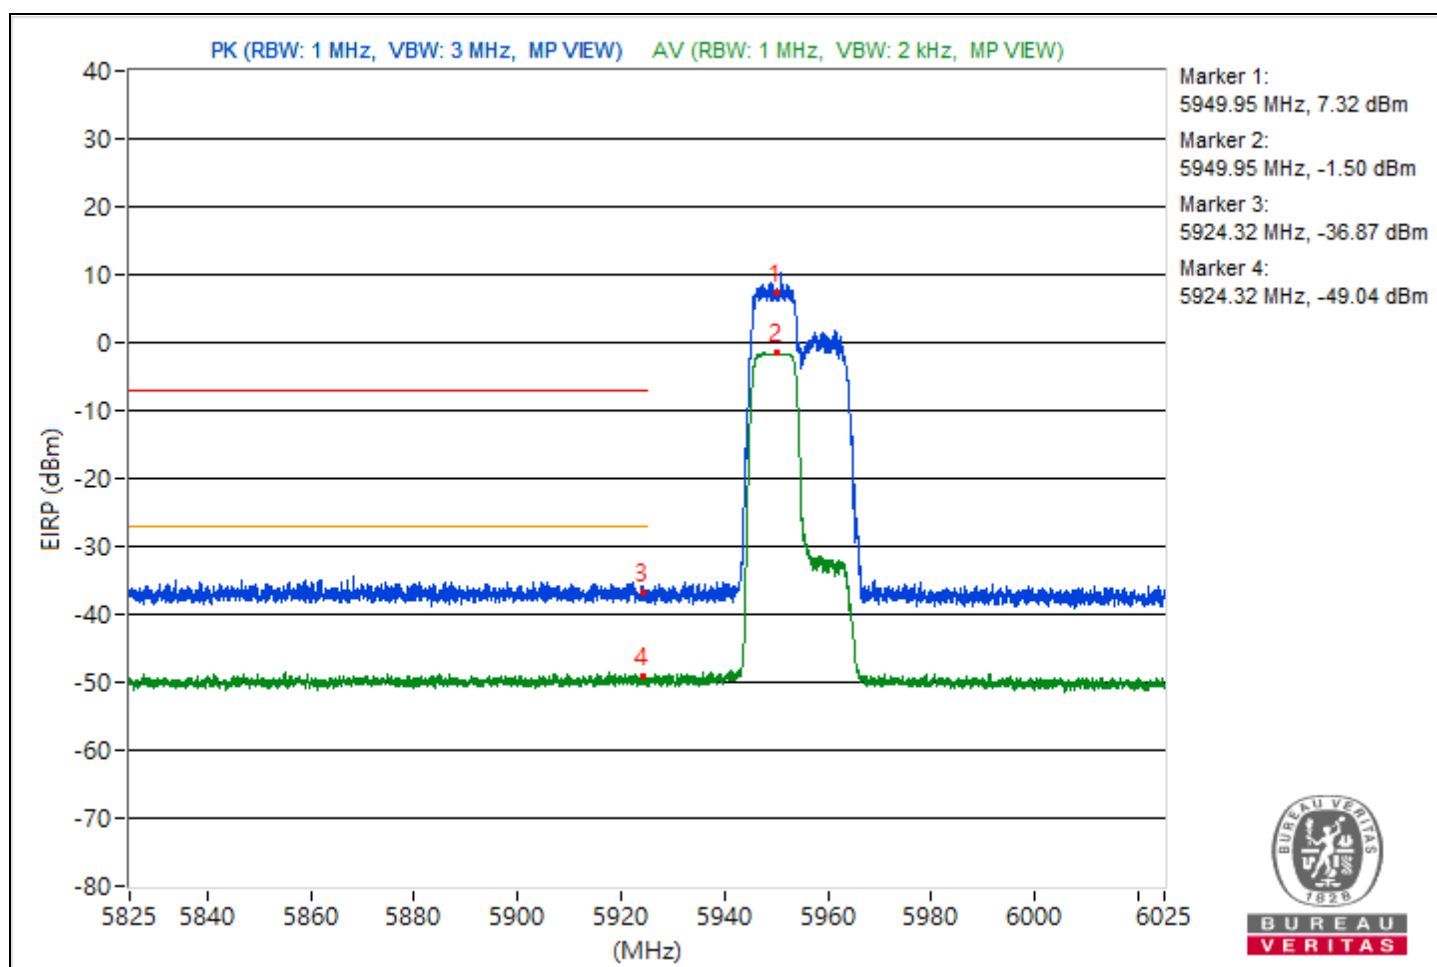

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	74.8 PK	88.26	-13.46	-31.32	-32.44	8.37	-20.46
2	#7125	59.47 AV	68.26	-8.79	-47.18	-47.16	8.37	-35.79

Notes:


1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

For Integration method:

Chain 0

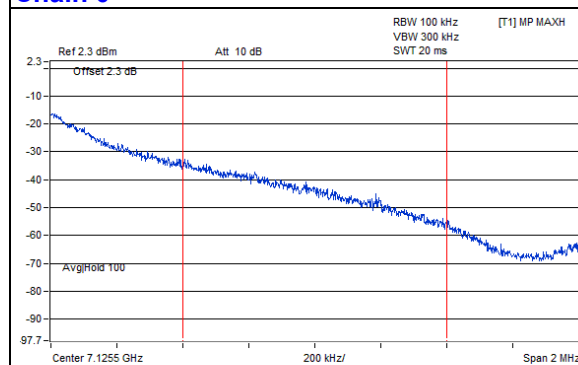


Peak

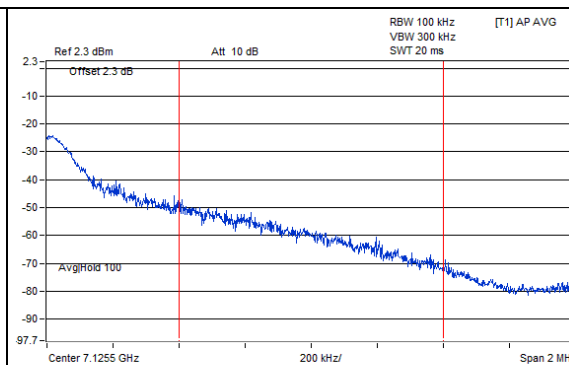


Average

Chain 1

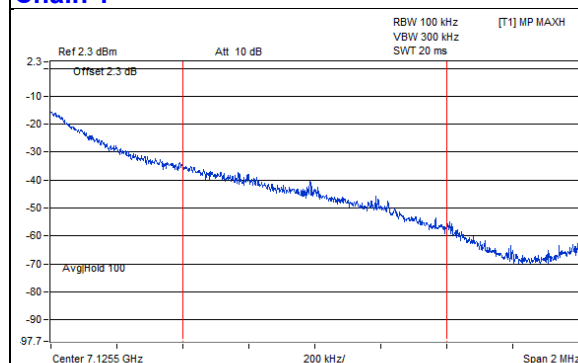

Peak

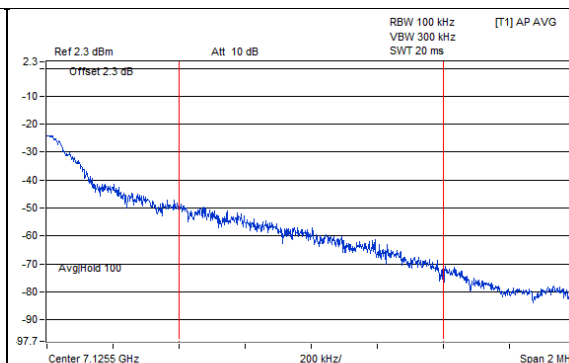


Average

RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5950.87	106.67 PK			-1.73	1.28	8.37	11.41
2	*5950.87	95.74 AV			-12.31	-9.83	8.37	0.48
3	#5834.62	58.72 PK	88.26	-29.54	-48.03	-47.81	8.37	-36.54
4	#5834.62	46.73 AV	68.26	-21.53	-59.1	-60.89	8.37	-48.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

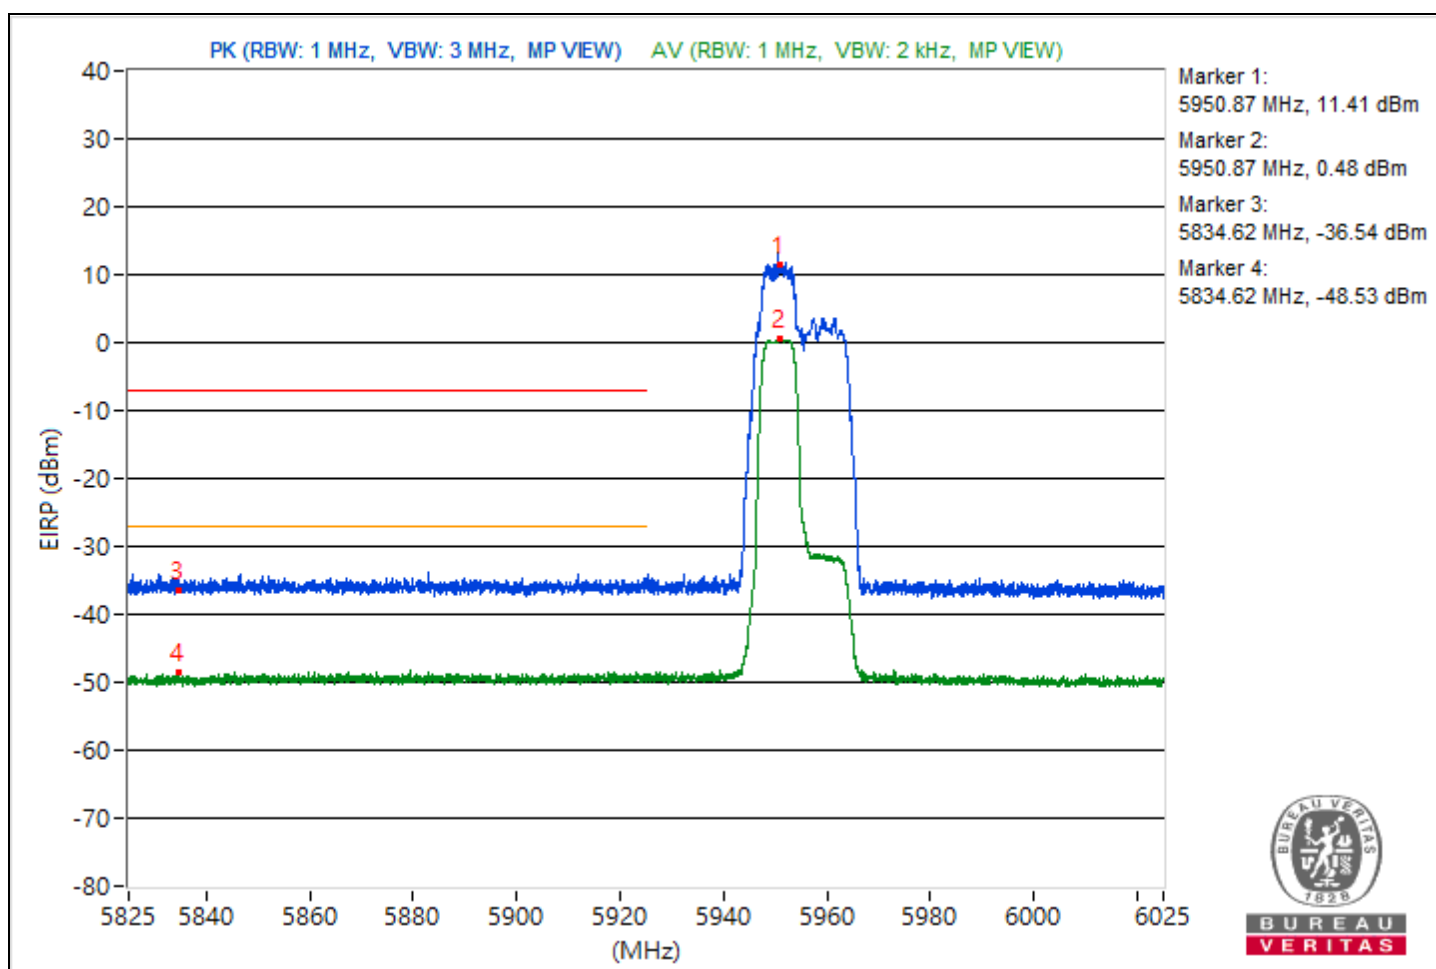


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7118.62	102.69 PK			-3.18	-4.89	8.37	7.43
2	*7118.62	93.54 AV			-12.85	-13.36	8.37	-1.72
3	#7125.05	76.11 PK	88.26	-12.15	-29.45	-31.98	8.37	-19.15
4	#7125.05	50.65 AV	68.26	-17.61	-55.87	-56.11	8.37	-44.61

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

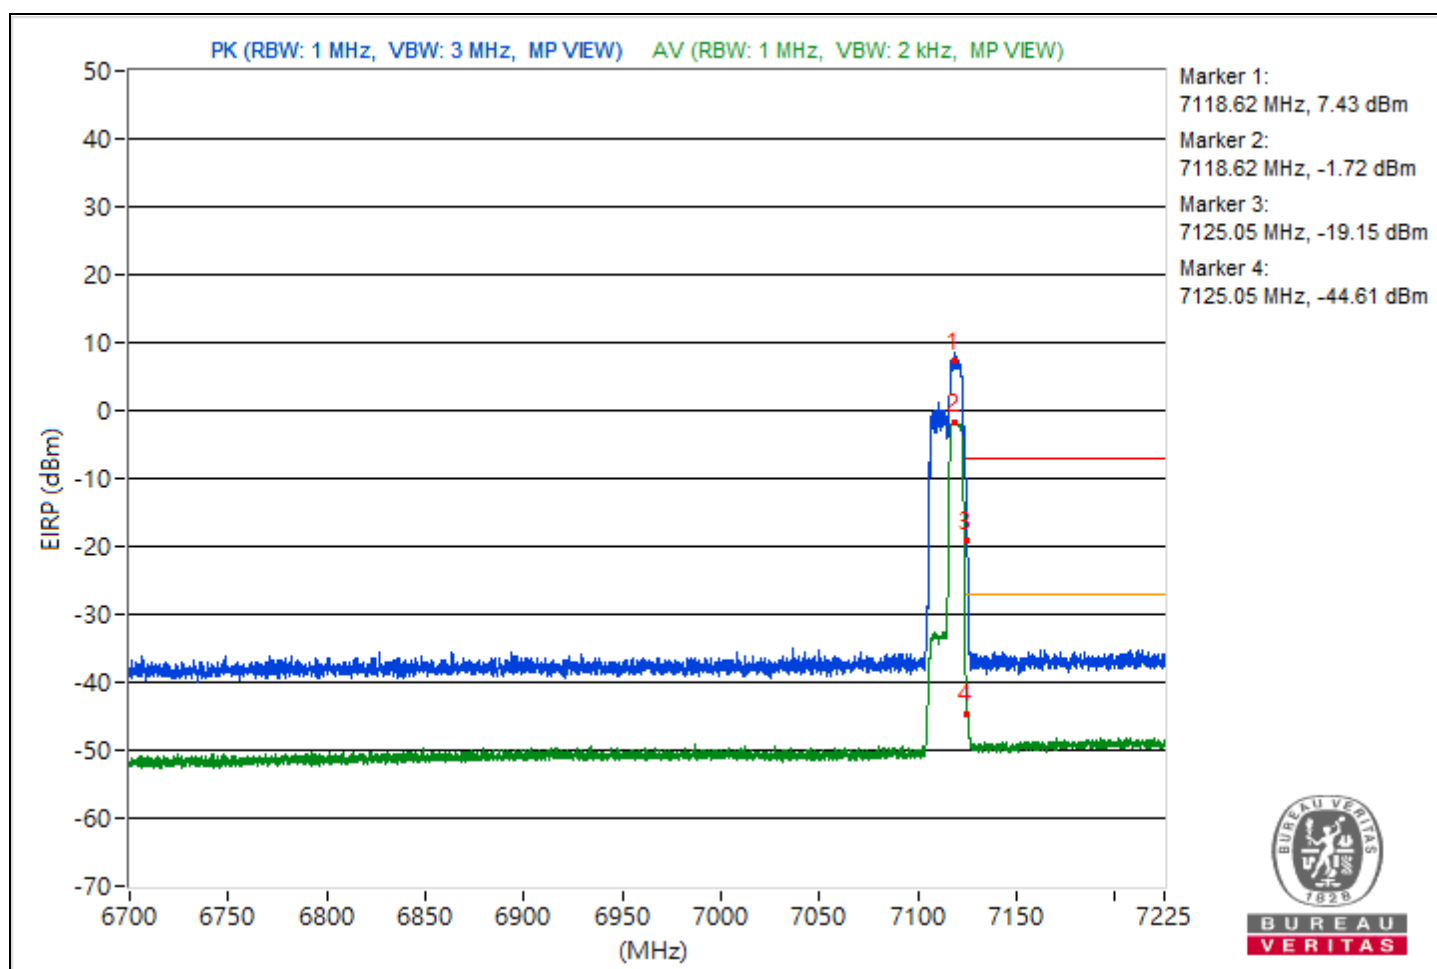


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.9	102.2 PK			-3.87	-5.1	8.37	6.94
2	*5953.9	93.85 AV			-12.53	-13.07	8.37	-1.41
3	#5913.68	58.6 PK	88.26	-29.66	-48.64	-47.51	8.37	-36.66
4	#5913.68	46.86 AV	68.26	-21.4	-59.34	-60.28	8.37	-48.4

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

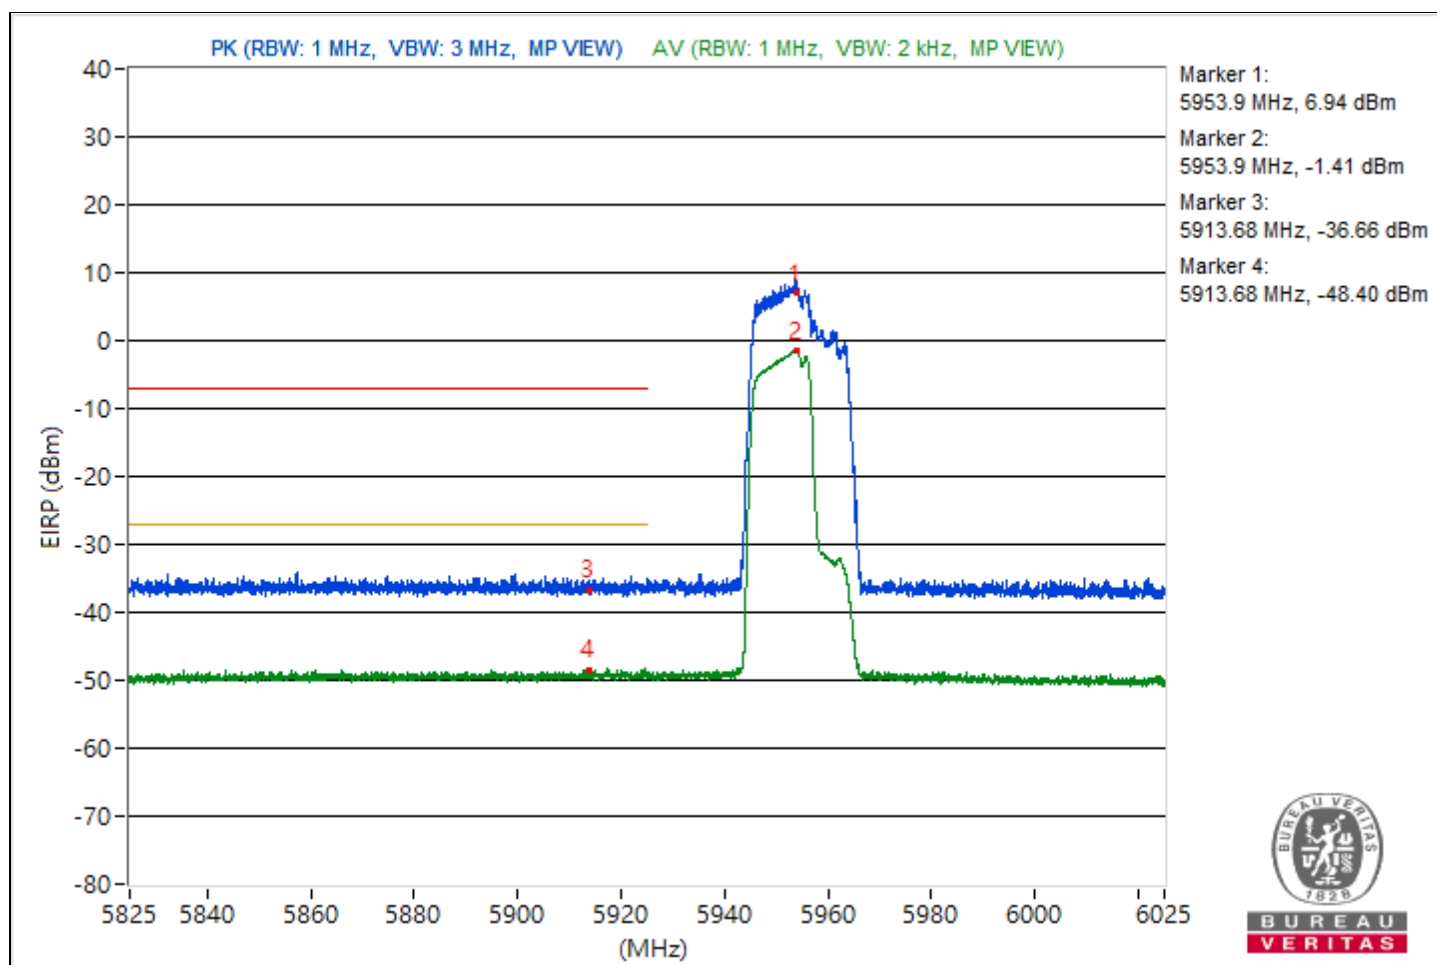

RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung



Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	71.09 PK	88.26	-17.17	-34.99	-36.2	8.37	-24.17
2	#7125	55.79 AV	68.26	-12.47	-50.72	-50.98	8.37	-39.47

Notes:



1. Margin value = Emission Level - Limit value.
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

For Integration method:

Chain 0

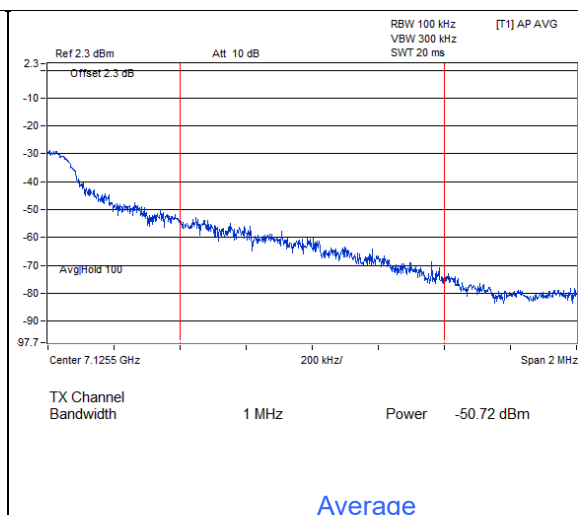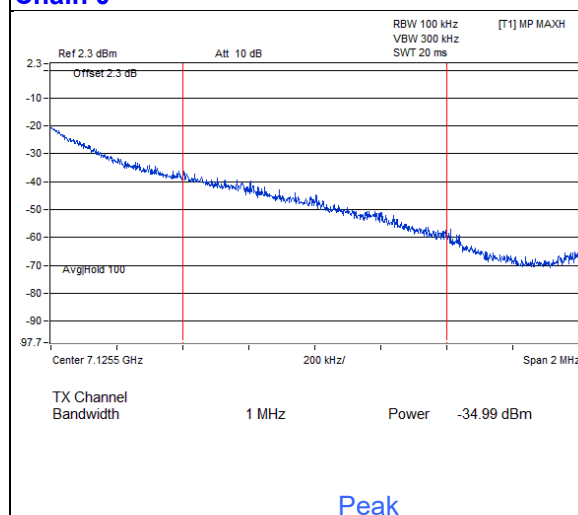

Chain 1

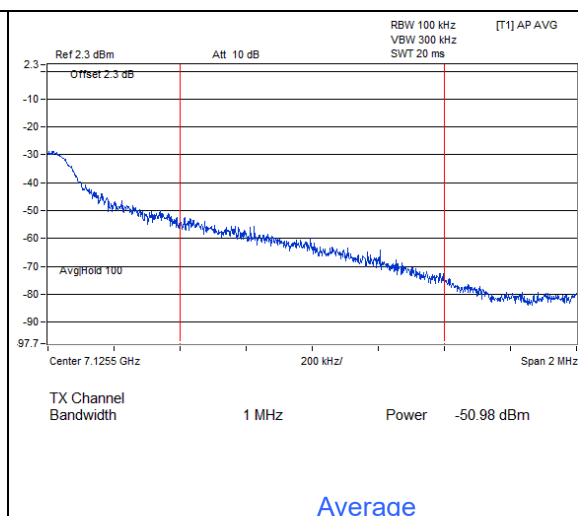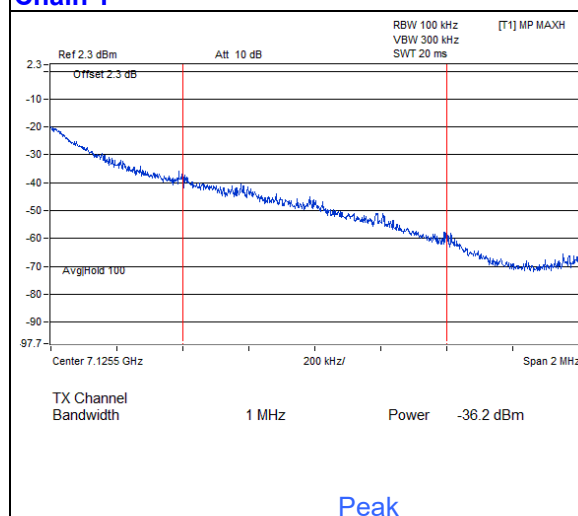


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982	102.23 PK			-4.52	-4.3	8.37	6.97
2	*5982	93.44 AV			-13.55	-12.87	8.37	-1.82
3	#5891.75	58.58 PK	88.26	-29.68	-49.21	-47.15	8.37	-36.68
4	#5891.75	47.54 AV	68.26	-20.72	-58.62	-59.65	8.37	-47.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

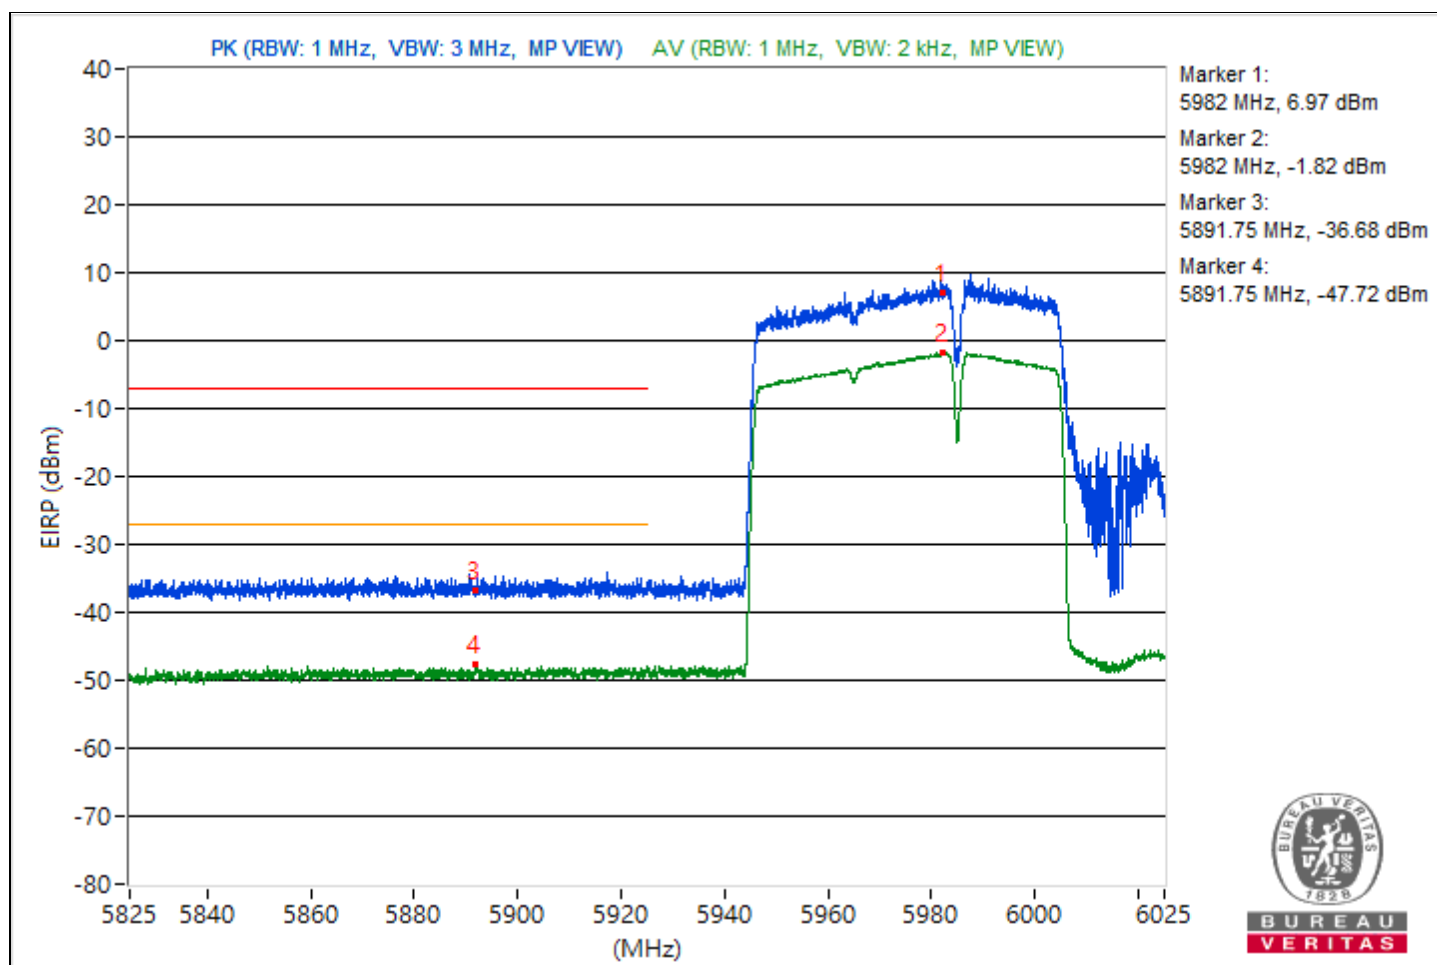


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7027.07	103.62 PK			-2.71	-3.36	8.37	8.36
2	*7027.07	93.76 AV			-12.98	-12.78	8.37	-1.5
3	#7201.11	59.64 PK	88.26	-28.62	-46.63	-47.4	8.37	-35.62
4	#7201.11	48 AV	68.26	-20.26	-58.21	-59.12	8.37	-47.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

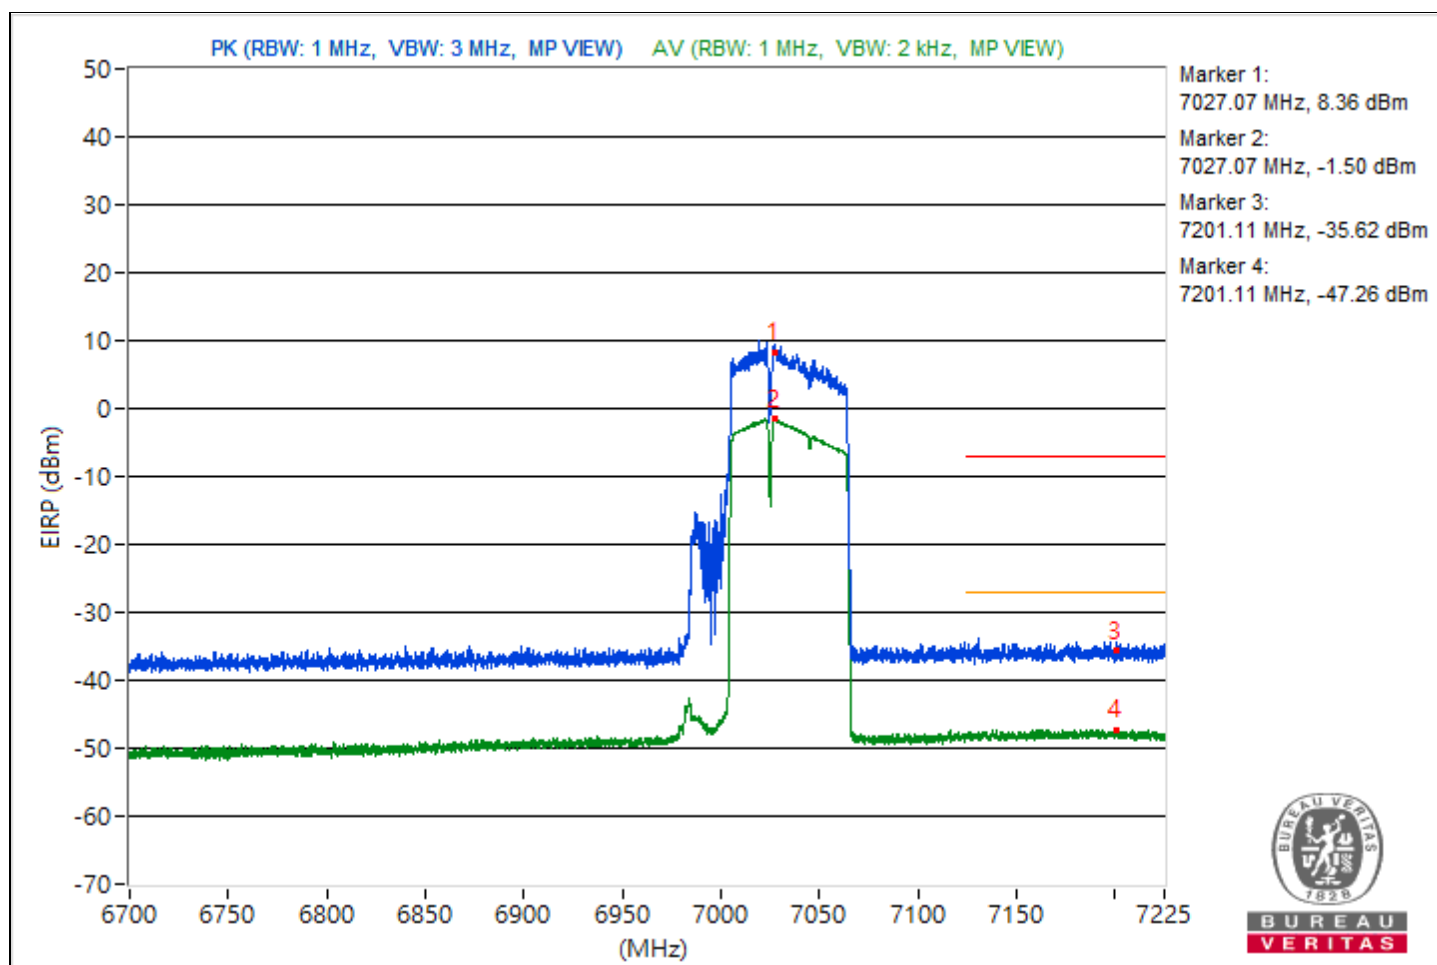


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.98	100.14 PK			-6.92	-6.11	8.37	4.88
2	*6022.98	92.97 AV			-13.45	-13.89	8.37	-2.29
3	#5902.27	58.08 PK	88.26	-30.18	-48.99	-48.16	8.37	-37.18
4	#5902.27	50.06 AV	68.26	-18.2	-56.28	-56.9	8.37	-45.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

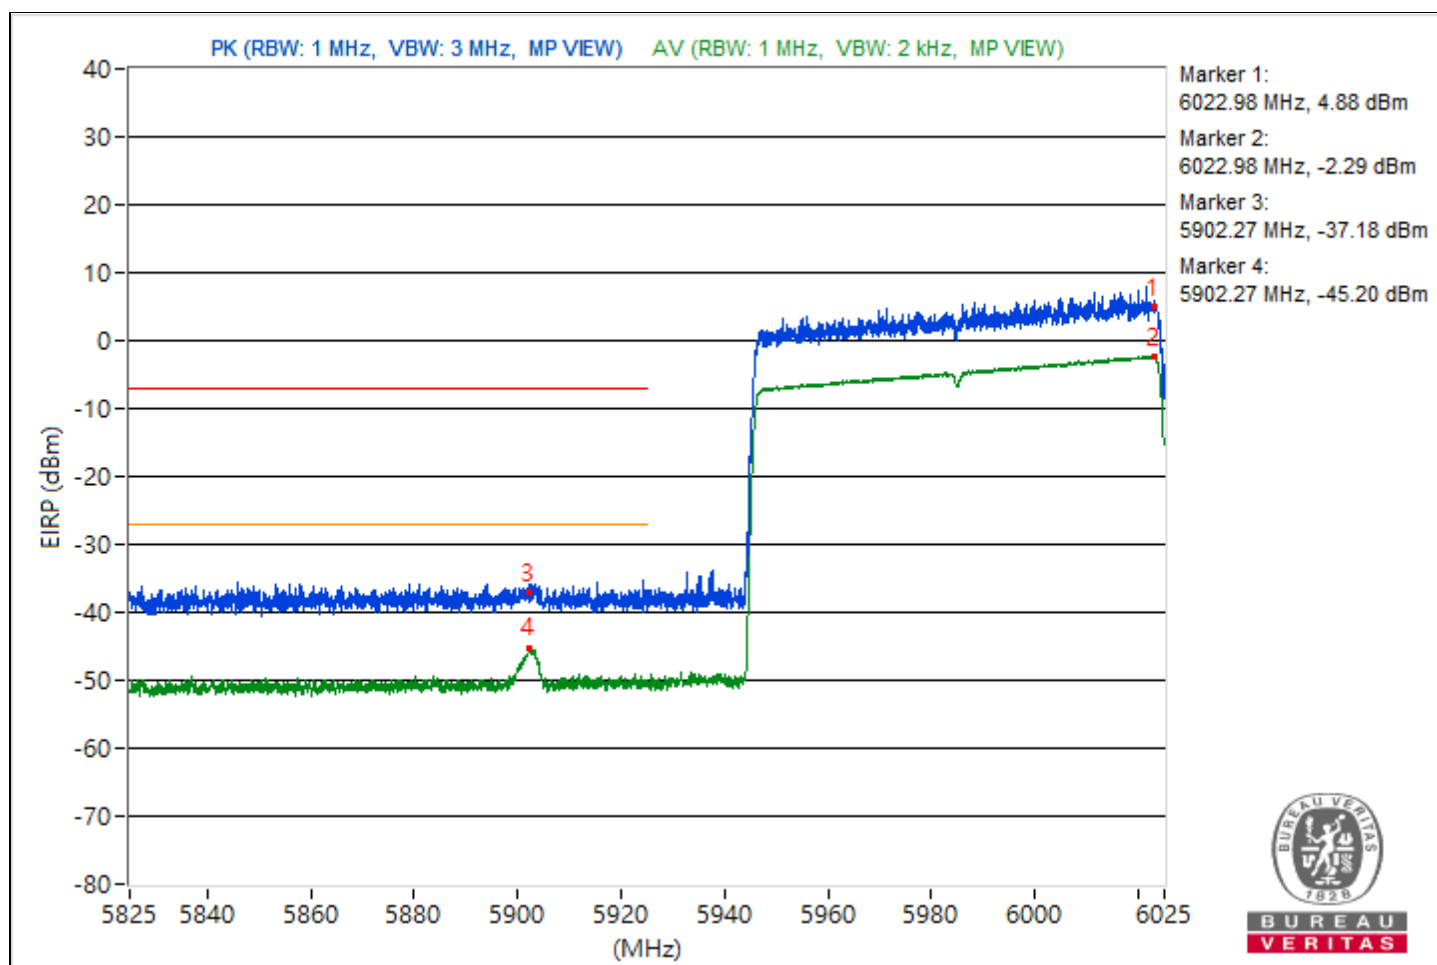


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6987.44	100.15 PK			-7.04	-6	8.37	4.89
2	*6987.44	92.72 AV			-14.1	-13.76	8.37	-2.54
3	#7158.98	55.87 PK	88.26	-32.39	-51.12	-50.45	8.37	-39.39
4	#7158.98	45.87 AV	68.26	-22.39	-62.45	-59.56	8.37	-49.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

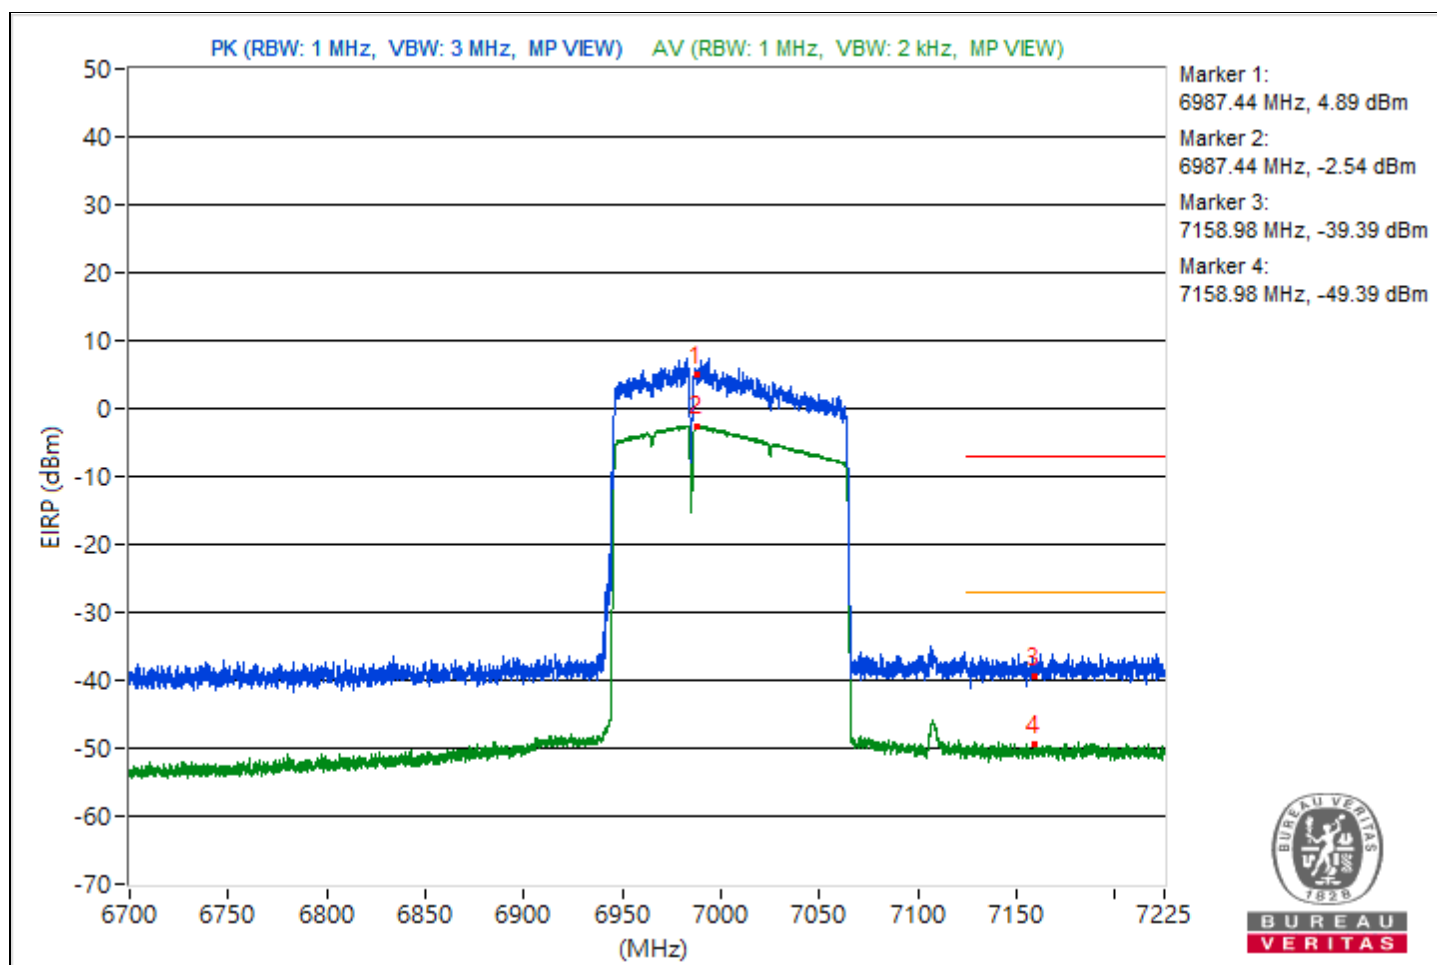


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.8	99.46 PK			-7.51	-6.88	8.37	4.2
2	*6022.8	92.69 AV			-14.02	-13.89	8.37	-2.57
3	#5921.5	59.83 PK	88.26	-28.43	-47.93	-45.92	8.37	-35.43
4	#5921.5	45.81 AV	68.26	-22.45	-61.97	-59.93	8.37	-49.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

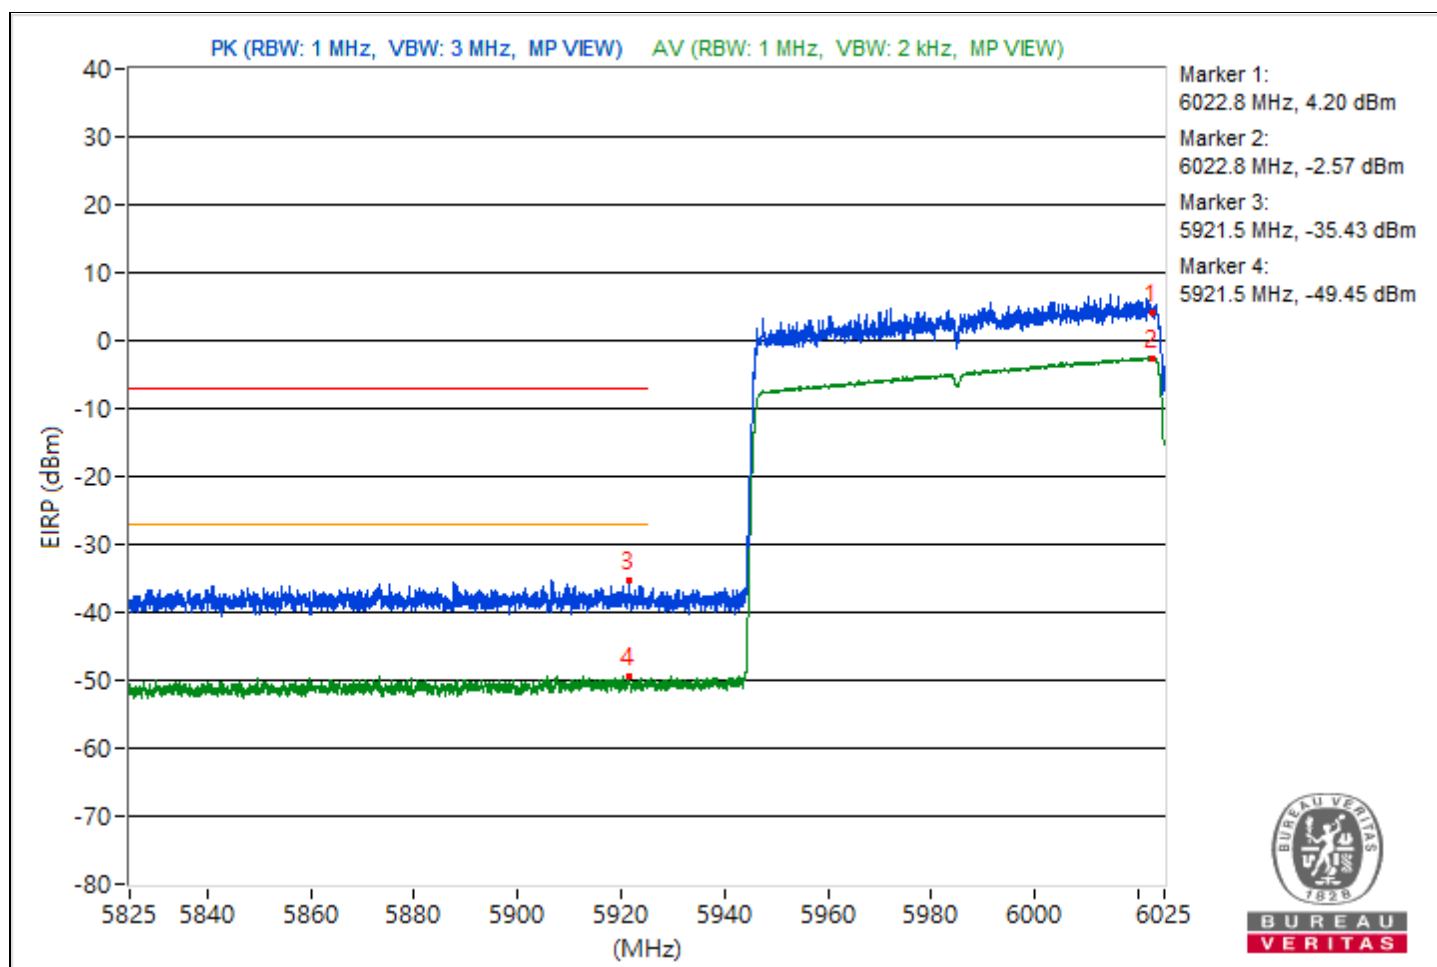


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6986.85	100.74 PK			-5.99	-5.82	8.37	5.48
2	*6986.85	93.29 AV			-13.25	-13.45	8.37	-1.97
3	#7146.97	56.7 PK	88.26	-31.56	-50.71	-49.28	8.37	-38.56
4	#7146.97	46.47 AV	68.26	-21.79	-59.58	-60.85	8.37	-48.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

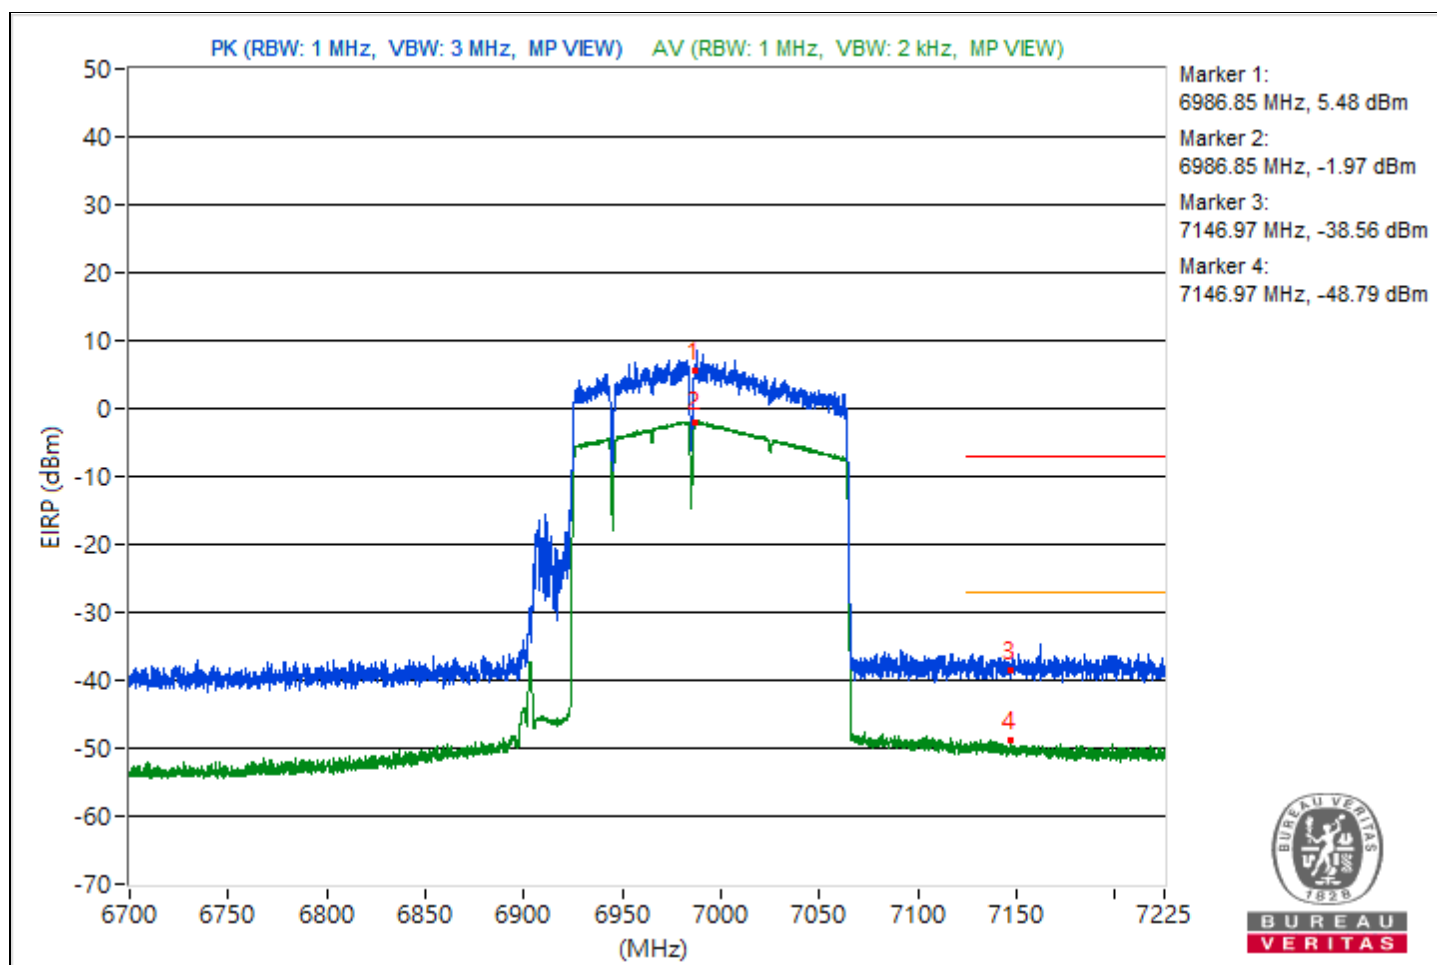

Mode B

1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.8 PK	74.0	-24.2	2.85 H	85	37.6	12.2
2	11910.00	39.1 AV	54.0	-14.9	2.85 H	85	26.9	12.2
3	17865.00	54.6 PK	74.0	-19.4	1.42 H	235	32.8	21.8
4	17865.00	43.9 AV	54.0	-10.1	1.42 H	235	22.1	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.1 PK	74.0	-26.9	1.97 V	211	34.9	12.2
2	11910.00	37.8 AV	54.0	-16.2	1.97 V	211	25.6	12.2
3	17865.00	55.1 PK	74.0	-18.9	1.74 V	58	33.3	21.8
4	17865.00	41.6 AV	54.0	-12.4	1.74 V	58	19.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.0 PK	74.0	-24.0	2.88 H	87	37.6	12.4
2	12350.00	39.5 AV	54.0	-14.5	2.88 H	87	27.1	12.4
3	18525.00	54.5 PK	74.0	-19.5	1.45 H	229	59.2	-4.7
4	18525.00	43.9 AV	54.0	-10.1	1.45 H	229	48.6	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.3 PK	74.0	-26.7	1.99 V	225	34.9	12.4
2	12350.00	38.0 AV	54.0	-16.0	1.99 V	225	25.6	12.4
3	18525.00	54.6 PK	74.0	-19.4	1.75 V	59	59.3	-4.7
4	18525.00	41.2 AV	54.0	-12.8	1.75 V	59	45.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.7 PK	88.2	-38.5	2.89 H	91	36.6	13.1
2	#12830.00	39.2 AV	68.2	-29.0	2.89 H	91	26.1	13.1
3	19245.00	55.3 PK	74.0	-18.7	1.47 H	240	59.3	-4.0
4	19245.00	44.3 AV	54.0	-9.7	1.47 H	240	48.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.5 PK	88.2	-40.7	2.00 V	217	34.4	13.1
2	#12830.00	38.2 AV	68.2	-30.0	2.00 V	217	25.1	13.1
3	19245.00	54.5 PK	74.0	-19.5	1.77 V	49	58.5	-4.0
4	19245.00	41.2 AV	54.0	-12.8	1.77 V	49	45.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.2 PK	88.2	-39.0	2.84 H	85	35.9	13.3
2	#12870.00	38.7 AV	68.2	-29.5	2.84 H	85	25.4	13.3
3	19305.00	54.9 PK	74.0	-19.1	1.46 H	227	58.8	-3.9
4	19305.00	44.1 AV	54.0	-9.9	1.46 H	227	48.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.8 PK	88.2	-41.4	1.94 V	203	33.5	13.3
2	#12870.00	37.3 AV	68.2	-30.9	1.94 V	203	24.0	13.3
3	19305.00	55.1 PK	74.0	-18.9	1.79 V	43	59.0	-3.9
4	19305.00	41.7 AV	54.0	-12.3	1.79 V	43	45.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	50.1 PK	88.2	-38.1	2.80 H	92	36.8	13.3
2	#12950.00	39.1 AV	68.2	-29.1	2.80 H	92	25.8	13.3
3	19425.00	54.6 PK	74.0	-19.4	1.46 H	246	58.1	-3.5
4	19425.00	43.9 AV	54.0	-10.1	1.46 H	246	47.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	47.4 PK	88.2	-40.8	1.98 V	208	34.1	13.3
2	#12950.00	38.3 AV	68.2	-29.9	1.98 V	208	25.0	13.3
3	19425.00	54.9 PK	74.0	-19.1	1.75 V	57	58.4	-3.5
4	19425.00	41.5 AV	54.0	-12.5	1.75 V	57	45.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.3 PK	88.2	-38.9	2.84 H	79	36.0	13.3
2	#13030.00	38.8 AV	68.2	-29.4	2.84 H	79	25.5	13.3
3	19545.00	54.6 PK	74.0	-19.4	1.42 H	249	58.3	-3.7
4	19545.00	43.8 AV	54.0	-10.2	1.42 H	249	47.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.0 PK	88.2	-41.2	2.03 V	219	33.7	13.3
2	#13030.00	37.9 AV	68.2	-30.3	2.03 V	219	24.6	13.3
3	19545.00	55.6 PK	74.0	-18.4	1.79 V	58	59.3	-3.7
4	19545.00	41.9 AV	54.0	-12.1	1.79 V	58	45.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.1 PK	88.2	-38.1	2.87 H	99	36.8	13.3
2	#13070.00	39.3 AV	68.2	-28.9	2.87 H	99	26.0	13.3
3	19605.00	54.8 PK	74.0	-19.2	1.43 H	248	58.8	-4.0
4	19605.00	44.3 AV	54.0	-9.7	1.43 H	248	48.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.1 PK	88.2	-41.1	2.03 V	226	33.8	13.3
2	#13070.00	37.6 AV	68.2	-30.6	2.03 V	226	24.3	13.3
3	19605.00	55.6 PK	74.0	-18.4	1.70 V	43	59.6	-4.0
4	19605.00	42.1 AV	54.0	-11.9	1.70 V	43	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	50.2 PK	74.0	-23.8	2.81 H	94	36.1	14.1
2	13390.00	39.5 AV	54.0	-14.5	2.81 H	94	25.4	14.1
3	20085.00	54.2 PK	74.0	-19.8	1.36 H	227	57.6	-3.4
4	20085.00	43.7 AV	54.0	-10.3	1.36 H	227	47.1	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.8 PK	74.0	-27.2	2.01 V	204	32.7	14.1
2	13390.00	37.4 AV	54.0	-16.6	2.01 V	204	23.3	14.1
3	20085.00	55.1 PK	74.0	-18.9	1.75 V	71	58.5	-3.4
4	20085.00	41.5 AV	54.0	-12.5	1.75 V	71	44.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.6 PK	88.2	-38.6	2.83 H	84	34.4	15.2
2	#13710.00	39.2 AV	68.2	-29.0	2.83 H	84	24.0	15.2
3	20565.00	54.4 PK	74.0	-19.6	1.38 H	227	57.6	-3.2
4	20565.00	43.9 AV	54.0	-10.1	1.38 H	227	47.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.3 PK	88.2	-40.9	1.94 V	220	32.1	15.2
2	#13710.00	37.9 AV	68.2	-30.3	1.94 V	220	22.7	15.2
3	20565.00	54.5 PK	74.0	-19.5	1.80 V	72	57.7	-3.2
4	20565.00	41.2 AV	54.0	-12.8	1.80 V	72	44.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.5 PK	88.2	-38.7	2.83 H	100	34.3	15.2
2	#13750.00	38.9 AV	68.2	-29.3	2.83 H	100	23.7	15.2
3	20625.00	54.6 PK	74.0	-19.4	1.43 H	242	57.9	-3.3
4	20625.00	43.8 AV	54.0	-10.2	1.43 H	242	47.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.3 PK	88.2	-40.9	1.97 V	215	32.1	15.2
2	#13750.00	38.1 AV	68.2	-30.1	1.97 V	215	22.9	15.2
3	20625.00	55.0 PK	74.0	-19.0	1.70 V	50	58.3	-3.3
4	20625.00	41.7 AV	54.0	-12.3	1.70 V	50	45.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.9 PK	88.2	-38.3	2.87 H	103	34.5	15.4
2	#13990.00	39.1 AV	68.2	-29.1	2.87 H	103	23.7	15.4
3	20985.00	54.7 PK	74.0	-19.3	1.50 H	262	57.4	-2.7
4	20985.00	43.7 AV	54.0	-10.3	1.50 H	262	46.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.4 PK	88.2	-40.8	1.94 V	218	32.0	15.4
2	#13990.00	38.2 AV	68.2	-30.0	1.94 V	218	22.8	15.4
3	20985.00	55.0 PK	74.0	-19.0	1.75 V	61	57.7	-2.7
4	20985.00	41.7 AV	54.0	-12.3	1.75 V	61	44.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.6 PK	88.2	-38.6	2.88 H	78	34.3	15.3
2	#14230.00	38.7 AV	68.2	-29.5	2.88 H	78	23.4	15.3
3	21345.00	54.8 PK	74.0	-19.2	1.45 H	245	57.0	-2.2
4	21345.00	43.9 AV	54.0	-10.1	1.45 H	245	46.1	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.1 PK	88.2	-41.1	1.95 V	216	31.8	15.3
2	#14230.00	37.9 AV	68.2	-30.3	1.95 V	216	22.6	15.3
3	21345.00	54.9 PK	74.0	-19.1	1.79 V	65	57.1	-2.2
4	21345.00	41.4 AV	54.0	-12.6	1.79 V	65	43.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.6 PK	74.0	-24.4	2.84 H	86	37.4	12.2
2	11910.00	38.6 AV	54.0	-15.4	2.84 H	86	26.4	12.2
3	17865.00	53.7 PK	74.0	-20.3	1.40 H	262	31.9	21.8
4	17865.00	43.4 AV	54.0	-10.6	1.40 H	262	21.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.0 PK	74.0	-27.0	1.98 V	193	34.8	12.2
2	11910.00	38.0 AV	54.0	-16.0	1.98 V	193	25.8	12.2
3	17865.00	54.8 PK	74.0	-19.2	1.66 V	55	33.0	21.8
4	17865.00	41.0 AV	54.0	-13.0	1.66 V	55	19.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.8 PK	74.0	-24.2	2.85 H	82	37.4	12.4
2	12350.00	39.0 AV	54.0	-15.0	2.85 H	82	26.6	12.4
3	18525.00	53.7 PK	74.0	-20.3	1.46 H	269	58.4	-4.7
4	18525.00	43.5 AV	54.0	-10.5	1.46 H	269	48.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.4 PK	74.0	-26.6	2.00 V	189	35.0	12.4
2	12350.00	38.4 AV	54.0	-15.6	2.00 V	189	26.0	12.4
3	18525.00	54.5 PK	74.0	-19.5	1.75 V	70	59.2	-4.7
4	18525.00	40.9 AV	54.0	-13.1	1.75 V	70	45.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.4 PK	88.2	-38.8	2.84 H	87	36.3	13.1
2	#12830.00	38.4 AV	68.2	-29.8	2.84 H	87	25.3	13.1
3	19245.00	54.1 PK	74.0	-19.9	1.45 H	271	58.1	-4.0
4	19245.00	43.9 AV	54.0	-10.1	1.45 H	271	47.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.1 PK	88.2	-40.1	1.96 V	194	35.0	13.1
2	#12830.00	38.9 AV	68.2	-29.3	1.96 V	194	25.8	13.1
3	19245.00	55.3 PK	74.0	-18.7	1.64 V	61	59.3	-4.0
4	19245.00	41.6 AV	54.0	-12.4	1.64 V	61	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.4 PK	88.2	-38.8	2.92 H	66	36.1	13.3
2	#12870.00	38.5 AV	68.2	-29.7	2.92 H	66	25.2	13.3
3	19305.00	54.9 PK	74.0	-19.1	1.46 H	263	58.8	-3.9
4	19305.00	44.4 AV	54.0	-9.6	1.46 H	263	48.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.2 PK	88.2	-41.0	1.97 V	205	33.9	13.3
2	#12870.00	38.2 AV	68.2	-30.0	1.97 V	205	24.9	13.3
3	19305.00	55.0 PK	74.0	-19.0	1.64 V	57	58.9	-3.9
4	19305.00	41.6 AV	54.0	-12.4	1.64 V	57	45.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	50.3 PK	88.2	-37.9	2.89 H	60	37.0	13.3
2	#12950.00	39.1 AV	68.2	-29.1	2.89 H	60	25.8	13.3
3	19425.00	54.5 PK	74.0	-19.5	1.45 H	264	58.0	-3.5
4	19425.00	44.2 AV	54.0	-9.8	1.45 H	264	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.9 PK	88.2	-41.3	1.96 V	200	33.6	13.3
2	#12950.00	38.1 AV	68.2	-30.1	1.96 V	200	24.8	13.3
3	19425.00	54.6 PK	74.0	-19.4	1.69 V	64	58.1	-3.5
4	19425.00	40.8 AV	54.0	-13.2	1.69 V	64	44.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.5 PK	88.2	-38.7	2.90 H	77	36.2	13.3
2	#13030.00	38.6 AV	68.2	-29.6	2.90 H	77	25.3	13.3
3	19545.00	54.3 PK	74.0	-19.7	1.45 H	250	58.0	-3.7
4	19545.00	43.6 AV	54.0	-10.4	1.45 H	250	47.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.8 PK	88.2	-40.4	1.96 V	211	34.5	13.3
2	#13030.00	38.9 AV	68.2	-29.3	1.96 V	211	25.6	13.3
3	19545.00	54.9 PK	74.0	-19.1	1.73 V	50	58.6	-3.7
4	19545.00	41.2 AV	54.0	-12.8	1.73 V	50	44.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.1 PK	88.2	-38.1	2.89 H	63	36.8	13.3
2	#13070.00	38.8 AV	68.2	-29.4	2.89 H	63	25.5	13.3
3	19605.00	54.6 PK	74.0	-19.4	1.39 H	251	58.6	-4.0
4	19605.00	44.3 AV	54.0	-9.7	1.39 H	251	48.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.8 PK	88.2	-40.4	1.97 V	203	34.5	13.3
2	#13070.00	38.9 AV	68.2	-29.3	1.97 V	203	25.6	13.3
3	19605.00	55.2 PK	74.0	-18.8	1.69 V	49	59.2	-4.0
4	19605.00	41.5 AV	54.0	-12.5	1.69 V	49	45.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.4 PK	74.0	-24.6	2.92 H	67	35.3	14.1
2	13390.00	38.5 AV	54.0	-15.5	2.92 H	67	24.4	14.1
3	20085.00	54.0 PK	74.0	-20.0	1.44 H	264	57.4	-3.4
4	20085.00	43.9 AV	54.0	-10.1	1.44 H	264	47.3	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.8 PK	74.0	-26.2	2.06 V	215	33.7	14.1
2	13390.00	38.9 AV	54.0	-15.1	2.06 V	215	24.8	14.1
3	20085.00	55.2 PK	74.0	-18.8	1.64 V	70	58.6	-3.4
4	20085.00	41.6 AV	54.0	-12.4	1.64 V	70	45.0	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.0 PK	88.2	-39.2	2.92 H	65	33.8	15.2
2	#13710.00	38.3 AV	68.2	-29.9	2.92 H	65	23.1	15.2
3	20565.00	54.4 PK	74.0	-19.6	1.47 H	259	57.6	-3.2
4	20565.00	44.2 AV	54.0	-9.8	1.47 H	259	47.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.7 PK	88.2	-40.5	2.05 V	213	32.5	15.2
2	#13710.00	38.9 AV	68.2	-29.3	2.05 V	213	23.7	15.2
3	20565.00	54.5 PK	74.0	-19.5	1.72 V	50	57.7	-3.2
4	20565.00	41.1 AV	54.0	-12.9	1.72 V	50	44.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	50.2 PK	88.2	-38.0	2.82 H	80	35.0	15.2
2	#13750.00	39.0 AV	68.2	-29.2	2.82 H	80	23.8	15.2
3	20625.00	53.7 PK	74.0	-20.3	1.40 H	273	57.0	-3.3
4	20625.00	43.5 AV	54.0	-10.5	1.40 H	273	46.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.9 PK	88.2	-40.3	2.06 V	208	32.7	15.2
2	#13750.00	39.0 AV	68.2	-29.2	2.06 V	208	23.8	15.2
3	20625.00	54.8 PK	74.0	-19.2	1.73 V	47	58.1	-3.3
4	20625.00	40.9 AV	54.0	-13.1	1.73 V	47	44.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.4 PK	88.2	-38.8	2.88 H	90	34.0	15.4
2	#13990.00	38.4 AV	68.2	-29.8	2.88 H	90	23.0	15.4
3	20985.00	53.9 PK	74.0	-20.1	1.49 H	262	56.6	-2.7
4	20985.00	43.7 AV	54.0	-10.3	1.49 H	262	46.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.0 PK	88.2	-40.2	1.96 V	217	32.6	15.4
2	#13990.00	38.7 AV	68.2	-29.5	1.96 V	217	23.3	15.4
3	20985.00	55.0 PK	74.0	-19.0	1.66 V	56	57.7	-2.7
4	20985.00	41.4 AV	54.0	-12.6	1.66 V	56	44.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	50.1 PK	88.2	-38.1	2.82 H	64	34.8	15.3
2	#14230.00	39.0 AV	68.2	-29.2	2.82 H	64	23.7	15.3
3	21345.00	54.1 PK	74.0	-19.9	1.45 H	257	56.3	-2.2
4	21345.00	43.7 AV	54.0	-10.3	1.45 H	257	45.9	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.4 PK	88.2	-40.8	2.04 V	208	32.1	15.3
2	#14230.00	38.7 AV	68.2	-29.5	2.04 V	208	23.4	15.3
3	21345.00	54.2 PK	74.0	-19.8	1.69 V	46	56.4	-2.2
4	21345.00	40.9 AV	54.0	-13.1	1.69 V	46	43.1	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.3 PK	74.0	-24.7	2.90 H	84	37.1	12.2
2	11930.00	38.5 AV	54.0	-15.5	2.90 H	84	26.3	12.2
3	17895.00	54.6 PK	74.0	-19.4	1.39 H	276	32.3	22.3
4	17895.00	43.9 AV	54.0	-10.1	1.39 H	276	21.6	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	46.9 PK	74.0	-27.1	2.00 V	212	34.7	12.2
2	11930.00	38.0 AV	54.0	-16.0	2.00 V	212	25.8	12.2
3	17895.00	55.0 PK	74.0	-19.0	1.71 V	58	32.7	22.3
4	17895.00	41.3 AV	54.0	-12.7	1.71 V	58	19.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	49.8 PK	74.0	-24.2	2.84 H	78	37.4	12.4
2	12330.00	38.9 AV	54.0	-15.1	2.84 H	78	26.5	12.4
3	18495.00	54.2 PK	74.0	-19.8	1.43 H	263	58.9	-4.7
4	18495.00	44.0 AV	54.0	-10.0	1.43 H	263	48.7	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	47.4 PK	74.0	-26.6	2.05 V	202	35.0	12.4
2	12330.00	38.6 AV	54.0	-15.4	2.05 V	202	26.2	12.4
3	18495.00	54.6 PK	74.0	-19.4	1.71 V	47	59.3	-4.7
4	18495.00	40.9 AV	54.0	-13.1	1.71 V	47	45.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	50.4 PK	88.2	-37.8	2.88 H	75	37.3	13.1
2	#12810.00	39.1 AV	68.2	-29.1	2.88 H	75	26.0	13.1
3	19215.00	54.5 PK	74.0	-19.5	1.47 H	277	58.7	-4.2
4	19215.00	44.3 AV	54.0	-9.7	1.47 H	277	48.5	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	47.3 PK	88.2	-40.9	2.01 V	199	34.2	13.1
2	#12810.00	38.5 AV	68.2	-29.7	2.01 V	199	25.4	13.1
3	19215.00	55.1 PK	74.0	-18.9	1.72 V	52	59.3	-4.2
4	19215.00	41.5 AV	54.0	-12.5	1.72 V	52	45.7	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	50.1 PK	88.2	-38.1	2.86 H	63	36.7	13.4
2	#12890.00	39.1 AV	68.2	-29.1	2.86 H	63	25.7	13.4
3	19335.00	53.6 PK	74.0	-20.4	1.38 H	268	57.3	-3.7
4	19335.00	43.4 AV	54.0	-10.6	1.38 H	268	47.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	47.9 PK	88.2	-40.3	2.04 V	218	34.5	13.4
2	#12890.00	39.0 AV	68.2	-29.2	2.04 V	218	25.6	13.4
3	19335.00	54.6 PK	74.0	-19.4	1.69 V	66	58.3	-3.7
4	19335.00	40.8 AV	54.0	-13.2	1.69 V	66	44.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	49.4 PK	88.2	-38.8	2.81 H	74	36.1	13.3
2	#12970.00	38.5 AV	68.2	-29.7	2.81 H	74	25.2	13.3
3	19455.00	54.0 PK	74.0	-20.0	1.46 H	278	57.4	-3.4
4	19455.00	43.4 AV	54.0	-10.6	1.46 H	278	46.8	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	46.9 PK	88.2	-41.3	2.03 V	192	33.6	13.3
2	#12970.00	38.2 AV	68.2	-30.0	2.03 V	192	24.9	13.3
3	19455.00	54.4 PK	74.0	-19.6	1.75 V	59	57.8	-3.4
4	19455.00	40.8 AV	54.0	-13.2	1.75 V	59	44.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	49.9 PK	88.2	-38.3	2.84 H	70	36.6	13.3
2	#13050.00	39.0 AV	68.2	-29.2	2.84 H	70	25.7	13.3
3	19575.00	54.7 PK	74.0	-19.3	1.47 H	279	58.5	-3.8
4	19575.00	44.1 AV	54.0	-9.9	1.47 H	279	47.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	47.1 PK	88.2	-41.1	1.98 V	189	33.8	13.3
2	#13050.00	38.0 AV	68.2	-30.2	1.98 V	189	24.7	13.3
3	19575.00	54.5 PK	74.0	-19.5	1.66 V	53	58.3	-3.8
4	19575.00	40.9 AV	54.0	-13.1	1.66 V	53	44.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	50.3 PK	88.2	-37.9	2.87 H	68	36.9	13.4
2	#13130.00	39.0 AV	68.2	-29.2	2.87 H	68	25.6	13.4
3	19695.00	54.2 PK	74.0	-19.8	1.46 H	269	58.2	-4.0
4	19695.00	43.8 AV	54.0	-10.2	1.46 H	269	47.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	47.1 PK	88.2	-41.1	1.97 V	214	33.7	13.4
2	#13130.00	38.0 AV	68.2	-30.2	1.97 V	214	24.6	13.4
3	19695.00	55.1 PK	74.0	-18.9	1.71 V	65	59.1	-4.0
4	19695.00	41.6 AV	54.0	-12.4	1.71 V	65	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	50.2 PK	88.2	-38.0	2.88 H	67	35.8	14.4
2	#13450.00	39.0 AV	68.2	-29.2	2.88 H	67	24.6	14.4
3	20175.00	54.4 PK	74.0	-19.6	1.43 H	269	57.6	-3.2
4	20175.00	44.2 AV	54.0	-9.8	1.43 H	269	47.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	47.2 PK	88.2	-41.0	2.06 V	188	32.8	14.4
2	#13450.00	38.4 AV	68.2	-29.8	2.06 V	188	24.0	14.4
3	20175.00	55.4 PK	74.0	-18.6	1.65 V	45	58.6	-3.2
4	20175.00	41.6 AV	54.0	-12.4	1.65 V	45	44.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	49.3 PK	88.2	-38.9	2.85 H	81	34.0	15.3
2	#13690.00	38.5 AV	68.2	-29.7	2.85 H	81	23.2	15.3
3	20535.00	54.4 PK	74.0	-19.6	1.50 H	260	57.6	-3.2
4	20535.00	44.0 AV	54.0	-10.0	1.50 H	260	47.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	47.8 PK	88.2	-40.4	2.05 V	199	32.5	15.3
2	#13690.00	38.9 AV	68.2	-29.3	2.05 V	199	23.6	15.3
3	20535.00	55.1 PK	74.0	-18.9	1.71 V	70	58.3	-3.2
4	20535.00	41.5 AV	54.0	-12.5	1.71 V	70	44.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	49.8 PK	88.2	-38.4	2.86 H	69	34.7	15.1
2	#13770.00	38.5 AV	68.2	-29.7	2.86 H	69	23.4	15.1
3	20655.00	54.2 PK	74.0	-19.8	1.49 H	253	57.4	-3.2
4	20655.00	43.9 AV	54.0	-10.1	1.49 H	253	47.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	47.9 PK	88.2	-40.3	1.98 V	198	32.8	15.1
2	#13770.00	38.8 AV	68.2	-29.4	1.98 V	198	23.7	15.1
3	20655.00	54.5 PK	74.0	-19.5	1.65 V	58	57.7	-3.2
4	20655.00	40.7 AV	54.0	-13.3	1.65 V	58	43.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	50.2 PK	88.2	-38.0	2.88 H	90	34.7	15.5
2	#14010.00	39.0 AV	68.2	-29.2	2.88 H	90	23.5	15.5
3	21015.00	54.7 PK	74.0	-19.3	1.48 H	255	57.4	-2.7
4	21015.00	44.4 AV	54.0	-9.6	1.48 H	255	47.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.0 PK	88.2	-40.2	2.03 V	206	32.5	15.5
2	#14010.00	38.9 AV	68.2	-29.3	2.03 V	206	23.4	15.5
3	21015.00	54.7 PK	74.0	-19.3	1.64 V	59	57.4	-2.7
4	21015.00	41.2 AV	54.0	-12.8	1.64 V	59	43.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	50.0 PK	88.2	-38.2	2.91 H	83	34.8	15.2
2	#14170.00	39.0 AV	68.2	-29.2	2.91 H	83	23.8	15.2
3	21255.00	54.1 PK	74.0	-19.9	1.38 H	269	56.5	-2.4
4	21255.00	43.8 AV	54.0	-10.2	1.38 H	269	46.2	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	47.0 PK	88.2	-41.2	1.95 V	188	31.8	15.2
2	#14170.00	38.0 AV	68.2	-30.2	1.95 V	188	22.8	15.2
3	21255.00	54.6 PK	74.0	-19.4	1.66 V	72	57.0	-2.4
4	21255.00	41.2 AV	54.0	-12.8	1.66 V	72	43.6	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	49.7 PK	74.0	-24.3	2.88 H	87	37.5	12.2
2	11970.00	38.7 AV	54.0	-15.3	2.88 H	87	26.5	12.2
3	17955.00	54.8 PK	74.0	-19.2	1.48 H	271	31.6	23.2
4	17955.00	44.2 AV	54.0	-9.8	1.48 H	271	21.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.9 PK	74.0	-26.1	1.96 V	202	35.7	12.2
2	11970.00	38.7 AV	54.0	-15.3	1.96 V	202	26.5	12.2
3	17955.00	55.2 PK	74.0	-18.8	1.65 V	57	32.0	23.2
4	17955.00	41.5 AV	54.0	-12.5	1.65 V	57	18.3	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	49.7 PK	74.0	-24.3	2.82 H	89	37.2	12.5
2	12290.00	38.7 AV	54.0	-15.3	2.82 H	89	26.2	12.5
3	18435.00	54.0 PK	74.0	-20.0	1.44 H	259	58.9	-4.9
4	18435.00	43.6 AV	54.0	-10.4	1.44 H	259	48.5	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	47.5 PK	74.0	-26.5	2.00 V	193	35.0	12.5
2	12290.00	38.5 AV	54.0	-15.5	2.00 V	193	26.0	12.5
3	18435.00	54.7 PK	74.0	-19.3	1.72 V	63	59.6	-4.9
4	18435.00	41.0 AV	54.0	-13.0	1.72 V	63	45.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.1 PK	88.2	-39.1	2.84 H	88	36.0	13.1
2	#12770.00	38.2 AV	68.2	-30.0	2.84 H	88	25.1	13.1
3	19155.00	54.4 PK	74.0	-19.6	1.41 H	261	58.6	-4.2
4	19155.00	44.3 AV	54.0	-9.7	1.41 H	261	48.5	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.2 PK	88.2	-41.0	2.01 V	194	34.1	13.1
2	#12770.00	38.4 AV	68.2	-29.8	2.01 V	194	25.3	13.1
3	19155.00	54.2 PK	74.0	-19.8	1.67 V	48	58.4	-4.2
4	19155.00	40.8 AV	54.0	-13.2	1.67 V	48	45.0	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	49.3 PK	88.2	-38.9	2.87 H	67	35.9	13.4
2	#12930.00	38.2 AV	68.2	-30.0	2.87 H	67	24.8	13.4
3	19395.00	54.7 PK	74.0	-19.3	1.50 H	260	58.2	-3.5
4	19395.00	44.2 AV	54.0	-9.8	1.50 H	260	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.4 PK	88.2	-40.8	1.97 V	202	34.0	13.4
2	#12930.00	38.1 AV	68.2	-30.1	1.97 V	202	24.7	13.4
3	19395.00	55.0 PK	74.0	-19.0	1.74 V	73	58.5	-3.5
4	19395.00	41.4 AV	54.0	-12.6	1.74 V	73	44.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	50.1 PK	88.2	-38.1	2.87 H	62	36.6	13.5
2	#13090.00	38.9 AV	68.2	-29.3	2.87 H	62	25.4	13.5
3	19635.00	54.1 PK	74.0	-19.9	1.48 H	260	58.1	-4.0
4	19635.00	43.6 AV	54.0	-10.4	1.48 H	260	47.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	47.2 PK	88.2	-41.0	2.05 V	197	33.7	13.5
2	#13090.00	38.4 AV	68.2	-29.8	2.05 V	197	24.9	13.5
3	19635.00	54.9 PK	74.0	-19.1	1.65 V	47	58.9	-4.0
4	19635.00	41.2 AV	54.0	-12.8	1.65 V	47	45.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	49.7 PK	88.2	-38.5	2.88 H	74	35.5	14.2
2	#13410.00	38.8 AV	68.2	-29.4	2.88 H	74	24.6	14.2
3	20115.00	54.5 PK	74.0	-19.5	1.50 H	261	57.7	-3.2
4	20115.00	44.0 AV	54.0	-10.0	1.50 H	261	47.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.1 PK	88.2	-40.1	2.00 V	215	33.9	14.2
2	#13410.00	38.8 AV	68.2	-29.4	2.00 V	215	24.6	14.2
3	20115.00	54.7 PK	74.0	-19.3	1.74 V	53	57.9	-3.2
4	20115.00	41.0 AV	54.0	-13.0	1.74 V	53	44.2	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	49.8 PK	88.2	-38.4	2.87 H	90	34.7	15.1
2	#13730.00	38.6 AV	68.2	-29.6	2.87 H	90	23.5	15.1
3	20595.00	54.2 PK	74.0	-19.8	1.45 H	277	57.6	-3.4
4	20595.00	43.9 AV	54.0	-10.1	1.45 H	277	47.3	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	47.3 PK	88.2	-40.9	1.99 V	200	32.2	15.1
2	#13730.00	38.5 AV	68.2	-29.7	1.99 V	200	23.4	15.1
3	20595.00	54.5 PK	74.0	-19.5	1.74 V	74	57.9	-3.4
4	20595.00	40.8 AV	54.0	-13.2	1.74 V	74	44.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	49.2 PK	88.2	-39.0	2.83 H	63	34.3	14.9
2	#13890.00	38.3 AV	68.2	-29.9	2.83 H	63	23.4	14.9
3	20835.00	54.1 PK	74.0	-19.9	1.42 H	265	56.8	-2.7
4	20835.00	43.5 AV	54.0	-10.5	1.42 H	265	46.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	47.3 PK	88.2	-40.9	2.02 V	217	32.4	14.9
2	#13890.00	38.5 AV	68.2	-29.7	2.02 V	217	23.6	14.9
3	20835.00	54.5 PK	74.0	-19.5	1.67 V	46	57.2	-2.7
4	20835.00	41.1 AV	54.0	-12.9	1.67 V	46	43.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	49.6 PK	88.2	-38.6	2.84 H	86	34.2	15.4
2	#14050.00	38.9 AV	68.2	-29.3	2.84 H	86	23.5	15.4
3	21075.00	54.0 PK	74.0	-20.0	1.45 H	259	56.7	-2.7
4	21075.00	43.6 AV	54.0	-10.4	1.45 H	259	46.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	47.4 PK	88.2	-40.8	1.96 V	205	32.0	15.4
2	#14050.00	38.7 AV	68.2	-29.5	1.96 V	205	23.3	15.4
3	21075.00	54.7 PK	74.0	-19.3	1.70 V	75	57.4	-2.7
4	21075.00	40.9 AV	54.0	-13.1	1.70 V	75	43.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	50.1 PK	74.0	-23.9	2.83 H	71	37.6	12.5
2	12050.00	39.1 AV	54.0	-14.9	2.83 H	71	26.6	12.5
3	18075.00	54.4 PK	74.0	-19.6	1.49 H	255	58.9	-4.5
4	18075.00	44.1 AV	54.0	-9.9	1.49 H	255	48.6	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.3 PK	74.0	-26.7	1.96 V	218	34.8	12.5
2	12050.00	38.2 AV	54.0	-15.8	1.96 V	218	25.7	12.5
3	18075.00	54.7 PK	74.0	-19.3	1.65 V	62	59.2	-4.5
4	18075.00	41.1 AV	54.0	-12.9	1.65 V	62	45.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	50.2 PK	74.0	-23.8	2.84 H	81	37.8	12.4
2	12370.00	39.1 AV	54.0	-14.9	2.84 H	81	26.7	12.4
3	18555.00	54.4 PK	74.0	-19.6	1.40 H	270	58.9	-4.5
4	18555.00	43.9 AV	54.0	-10.1	1.40 H	270	48.4	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	47.3 PK	74.0	-26.7	1.99 V	194	34.9	12.4
2	12370.00	38.3 AV	54.0	-15.7	1.99 V	194	25.9	12.4
3	18555.00	55.5 PK	74.0	-18.5	1.66 V	69	60.0	-4.5
4	18555.00	41.6 AV	54.0	-12.4	1.66 V	69	46.1	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.5 PK	74.0	-24.5	2.89 H	68	36.5	13.0
2	12690.00	38.8 AV	54.0	-15.2	2.89 H	68	25.8	13.0
3	19035.00	54.3 PK	74.0	-19.7	1.44 H	253	58.4	-4.1
4	19035.00	43.7 AV	54.0	-10.3	1.44 H	253	47.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.1 PK	74.0	-25.9	2.06 V	193	35.1	13.0
2	12690.00	38.9 AV	54.0	-15.1	2.06 V	193	25.9	13.0
3	19035.00	55.0 PK	74.0	-19.0	1.68 V	48	59.1	-4.1
4	19035.00	41.4 AV	54.0	-12.6	1.68 V	48	45.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	49.3 PK	88.2	-38.9	2.82 H	75	36.1	13.2
2	#13010.00	38.6 AV	68.2	-29.6	2.82 H	75	25.4	13.2
3	19515.00	54.5 PK	74.0	-19.5	1.38 H	279	58.0	-3.5
4	19515.00	44.4 AV	54.0	-9.6	1.38 H	279	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	47.8 PK	88.2	-40.4	2.01 V	196	34.6	13.2
2	#13010.00	39.0 AV	68.2	-29.2	2.01 V	196	25.8	13.2
3	19515.00	54.7 PK	74.0	-19.3	1.66 V	53	58.2	-3.5
4	19515.00	41.2 AV	54.0	-12.8	1.66 V	53	44.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	50.3 PK	74.0	-23.7	2.87 H	89	36.5	13.8
2	13330.00	39.1 AV	54.0	-14.9	2.87 H	89	25.3	13.8
3	19995.00	54.4 PK	74.0	-19.6	1.42 H	266	58.2	-3.8
4	19995.00	43.8 AV	54.0	-10.2	1.42 H	266	47.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.2 PK	74.0	-26.8	1.97 V	190	33.4	13.8
2	13330.00	38.1 AV	54.0	-15.9	1.97 V	190	24.3	13.8
3	19995.00	54.1 PK	74.0	-19.9	1.67 V	56	57.9	-3.8
4	19995.00	40.8 AV	54.0	-13.2	1.67 V	56	44.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.4 PK	88.2	-38.8	2.81 H	64	34.3	15.1
2	#13650.00	38.3 AV	68.2	-29.9	2.81 H	64	23.2	15.1
3	20475.00	54.2 PK	74.0	-19.8	1.48 H	250	57.1	-2.9
4	20475.00	43.5 AV	54.0	-10.5	1.48 H	250	46.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	47.4 PK	88.2	-40.8	2.04 V	191	32.3	15.1
2	#13650.00	38.2 AV	68.2	-30.0	2.04 V	191	23.1	15.1
3	20475.00	54.2 PK	74.0	-19.8	1.69 V	49	57.1	-2.9
4	20475.00	40.9 AV	54.0	-13.1	1.69 V	49	43.8	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	50.1 PK	88.2	-38.1	2.82 H	73	34.8	15.3
2	#13970.00	38.9 AV	68.2	-29.3	2.82 H	73	23.6	15.3
3	20955.00	54.2 PK	74.0	-19.8	1.40 H	266	56.8	-2.6
4	20955.00	44.0 AV	54.0	-10.0	1.40 H	266	46.6	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.1 PK	88.2	-40.1	2.04 V	192	32.8	15.3
2	#13970.00	39.0 AV	68.2	-29.2	2.04 V	192	23.7	15.3
3	20955.00	54.5 PK	74.0	-19.5	1.69 V	66	57.1	-2.6
4	20955.00	40.9 AV	54.0	-13.1	1.69 V	66	43.5	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	3.11 H	80	35.7	12.2
2	11910.00	37.4 AV	54.0	-16.6	3.11 H	80	25.2	12.2
3	17865.00	52.0 PK	74.0	-22.0	1.61 H	222	30.2	21.8
4	17865.00	41.2 AV	54.0	-12.8	1.61 H	222	19.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.3 PK	74.0	-24.7	2.09 V	227	37.1	12.2
2	11910.00	37.6 AV	54.0	-16.4	2.09 V	227	25.4	12.2
3	17865.00	51.8 PK	74.0	-22.2	1.86 V	74	30.0	21.8
4	17865.00	41.9 AV	54.0	-12.1	1.86 V	74	20.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.9 PK	88.2	-40.3	3.13 H	86	34.8	13.1
2	#12830.00	37.5 AV	68.2	-30.7	3.13 H	86	24.4	13.1
3	19245.00	52.0 PK	74.0	-22.0	1.65 H	205	56.0	-4.0
4	19245.00	41.1 AV	54.0	-12.9	1.65 H	205	45.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.3 PK	88.2	-38.9	2.04 V	236	36.2	13.1
2	#12830.00	37.7 AV	68.2	-30.5	2.04 V	236	24.6	13.1
3	19245.00	52.0 PK	74.0	-22.0	1.87 V	79	56.0	-4.0
4	19245.00	41.9 AV	54.0	-12.1	1.87 V	79	45.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.9 PK	88.2	-40.3	3.16 H	92	34.6	13.3
2	#12870.00	37.3 AV	68.2	-30.9	3.16 H	92	24.0	13.3
3	19305.00	51.5 PK	74.0	-22.5	1.68 H	223	55.4	-3.9
4	19305.00	40.5 AV	54.0	-13.5	1.68 H	223	44.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.1 PK	88.2	-39.1	2.04 V	214	35.8	13.3
2	#12870.00	37.8 AV	68.2	-30.4	2.04 V	214	24.5	13.3
3	19305.00	52.1 PK	74.0	-21.9	1.90 V	66	56.0	-3.9
4	19305.00	42.0 AV	54.0	-12.0	1.90 V	66	45.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.3 PK	88.2	-40.9	3.13 H	75	34.0	13.3
2	#13030.00	37.0 AV	68.2	-31.2	3.13 H	75	23.7	13.3
3	19545.00	51.5 PK	74.0	-22.5	1.68 H	219	55.2	-3.7
4	19545.00	40.6 AV	54.0	-13.4	1.68 H	219	44.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.0 PK	88.2	-39.2	2.13 V	231	35.7	13.3
2	#13030.00	37.5 AV	68.2	-30.7	2.13 V	231	24.2	13.3
3	19545.00	51.1 PK	74.0	-22.9	1.91 V	76	54.8	-3.7
4	19545.00	41.3 AV	54.0	-12.7	1.91 V	76	45.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	3.18 H	71	34.6	13.3
2	#13070.00	37.6 AV	68.2	-30.6	3.18 H	71	24.3	13.3
3	19605.00	51.6 PK	74.0	-22.4	1.67 H	212	55.6	-4.0
4	19605.00	40.7 AV	54.0	-13.3	1.67 H	212	44.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.4 PK	88.2	-38.8	2.07 V	215	36.1	13.3
2	#13070.00	38.0 AV	68.2	-30.2	2.07 V	215	24.7	13.3
3	19605.00	51.5 PK	74.0	-22.5	1.83 V	84	55.5	-4.0
4	19605.00	41.9 AV	54.0	-12.1	1.83 V	84	45.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.0 PK	88.2	-40.2	3.20 H	78	32.8	15.2
2	#13750.00	37.6 AV	68.2	-30.6	3.20 H	78	22.4	15.2
3	20625.00	52.2 PK	74.0	-21.8	1.67 H	197	55.5	-3.3
4	20625.00	41.0 AV	54.0	-13.0	1.67 H	197	44.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.7 PK	88.2	-38.5	2.09 V	246	34.5	15.2
2	#13750.00	38.0 AV	68.2	-30.2	2.09 V	246	22.8	15.2
3	20625.00	51.7 PK	74.0	-22.3	1.89 V	54	55.0	-3.3
4	20625.00	42.0 AV	54.0	-12.0	1.89 V	54	45.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.1 PK	88.2	-40.1	3.09 H	99	32.7	15.4
2	#13990.00	37.8 AV	68.2	-30.4	3.09 H	99	22.4	15.4
3	20985.00	52.4 PK	74.0	-21.6	1.63 H	212	55.1	-2.7
4	20985.00	41.2 AV	54.0	-12.8	1.63 H	212	43.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.2 PK	88.2	-39.0	2.05 V	233	33.8	15.4
2	#13990.00	37.8 AV	68.2	-30.4	2.05 V	233	22.4	15.4
3	20985.00	51.4 PK	74.0	-22.6	1.87 V	78	54.1	-2.7
4	20985.00	41.4 AV	54.0	-12.6	1.87 V	78	44.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.9 PK	88.2	-40.3	3.14 H	91	32.6	15.3
2	#14230.00	37.5 AV	68.2	-30.7	3.14 H	91	22.2	15.3
3	21345.00	52.1 PK	74.0	-21.9	1.62 H	221	54.3	-2.2
4	21345.00	41.1 AV	54.0	-12.9	1.62 H	221	43.3	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.3 PK	88.2	-38.9	2.05 V	217	34.0	15.3
2	#14230.00	38.0 AV	68.2	-30.2	2.05 V	217	22.7	15.3
3	21345.00	51.9 PK	74.0	-22.1	1.86 V	57	54.1	-2.2
4	21345.00	41.9 AV	54.0	-12.1	1.86 V	57	44.1	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.8 PK	74.0	-26.2	2.94 H	101	35.6	12.2
2	11910.00	37.9 AV	54.0	-16.1	2.94 H	101	25.7	12.2
3	17865.00	52.0 PK	74.0	-22.0	1.61 H	175	30.2	21.8
4	17865.00	42.2 AV	54.0	-11.8	1.61 H	175	20.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.2 PK	74.0	-26.8	2.04 V	132	35.0	12.2
2	11910.00	37.2 AV	54.0	-16.8	2.04 V	132	25.0	12.2
3	17865.00	52.7 PK	74.0	-21.3	1.51 V	52	30.9	21.8
4	17865.00	42.2 AV	54.0	-11.8	1.51 V	52	20.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.9 PK	88.2	-40.3	2.92 H	86	34.8	13.1
2	#12830.00	37.8 AV	68.2	-30.4	2.92 H	86	24.7	13.1
3	19245.00	51.8 PK	74.0	-22.2	1.58 H	190	55.8	-4.0
4	19245.00	42.1 AV	54.0	-11.9	1.58 H	190	46.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.4 PK	88.2	-40.8	1.97 V	155	34.3	13.1
2	#12830.00	37.1 AV	68.2	-31.1	1.97 V	155	24.0	13.1
3	19245.00	52.1 PK	74.0	-21.9	1.60 V	43	56.1	-4.0
4	19245.00	41.9 AV	54.0	-12.1	1.60 V	43	45.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.2 PK	88.2	-41.0	2.91 H	85	33.9	13.3
2	#12870.00	37.4 AV	68.2	-30.8	2.91 H	85	24.1	13.3
3	19305.00	52.0 PK	74.0	-22.0	1.63 H	175	55.9	-3.9
4	19305.00	42.5 AV	54.0	-11.5	1.63 H	175	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.8 PK	88.2	-41.4	2.02 V	143	33.5	13.3
2	#12870.00	36.9 AV	68.2	-31.3	2.02 V	143	23.6	13.3
3	19305.00	53.1 PK	74.0	-20.9	1.55 V	45	57.0	-3.9
4	19305.00	42.3 AV	54.0	-11.7	1.55 V	45	46.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.3 PK	88.2	-39.9	2.99 H	89	35.0	13.3
2	#13030.00	38.3 AV	68.2	-29.9	2.99 H	89	25.0	13.3
3	19545.00	52.6 PK	74.0	-21.4	1.61 H	191	56.3	-3.7
4	19545.00	42.7 AV	54.0	-11.3	1.61 H	191	46.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.9 PK	88.2	-41.3	2.10 V	124	33.6	13.3
2	#13030.00	36.8 AV	68.2	-31.4	2.10 V	124	23.5	13.3
3	19545.00	53.3 PK	74.0	-20.7	1.56 V	56	57.0	-3.7
4	19545.00	42.7 AV	54.0	-11.3	1.56 V	56	46.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.2 PK	88.2	-41.0	2.98 H	111	33.9	13.3
2	#13070.00	37.6 AV	68.2	-30.6	2.98 H	111	24.3	13.3
3	19605.00	52.6 PK	74.0	-21.4	1.60 H	174	56.6	-4.0
4	19605.00	42.7 AV	54.0	-11.3	1.60 H	174	46.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.5 PK	88.2	-41.7	2.06 V	136	33.2	13.3
2	#13070.00	36.7 AV	68.2	-31.5	2.06 V	136	23.4	13.3
3	19605.00	52.4 PK	74.0	-21.6	1.54 V	62	56.4	-4.0
4	19605.00	42.0 AV	54.0	-12.0	1.54 V	62	46.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.0 PK	88.2	-40.2	2.98 H	103	32.8	15.2
2	#13750.00	38.0 AV	68.2	-30.2	2.98 H	103	22.8	15.2
3	20625.00	52.5 PK	74.0	-21.5	1.59 H	188	55.8	-3.3
4	20625.00	42.6 AV	54.0	-11.4	1.59 H	188	45.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.8 PK	88.2	-41.4	2.03 V	125	31.6	15.2
2	#13750.00	37.0 AV	68.2	-31.2	2.03 V	125	21.8	15.2
3	20625.00	53.2 PK	74.0	-20.8	1.55 V	47	56.5	-3.3
4	20625.00	42.7 AV	54.0	-11.3	1.55 V	47	46.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.6 PK	88.2	-40.6	2.92 H	86	32.2	15.4
2	#13990.00	37.9 AV	68.2	-30.3	2.92 H	86	22.5	15.4
3	20985.00	52.1 PK	74.0	-21.9	1.62 H	183	54.8	-2.7
4	20985.00	42.1 AV	54.0	-11.9	1.62 H	183	44.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.2 PK	88.2	-41.0	2.10 V	137	31.8	15.4
2	#13990.00	37.2 AV	68.2	-31.0	2.10 V	137	21.8	15.4
3	20985.00	52.8 PK	74.0	-21.2	1.47 V	60	55.5	-2.7
4	20985.00	42.4 AV	54.0	-11.6	1.47 V	60	45.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.4 PK	88.2	-40.8	2.91 H	90	32.1	15.3
2	#14230.00	37.8 AV	68.2	-30.4	2.91 H	90	22.5	15.3
3	21345.00	51.4 PK	74.0	-22.6	1.63 H	160	53.6	-2.2
4	21345.00	41.8 AV	54.0	-12.2	1.63 H	160	44.0	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.0 PK	88.2	-41.2	2.00 V	147	31.7	15.3
2	#14230.00	36.8 AV	68.2	-31.4	2.00 V	147	21.5	15.3
3	21345.00	52.6 PK	74.0	-21.4	1.57 V	59	54.8	-2.2
4	21345.00	42.4 AV	54.0	-11.6	1.57 V	59	44.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	2.99 H	102	35.1	12.2
2	11910.00	37.6 AV	54.0	-16.4	2.99 H	102	25.4	12.2
3	17865.00	51.6 PK	74.0	-22.4	1.59 H	169	29.8	21.8
4	17865.00	41.8 AV	54.0	-12.2	1.59 H	169	20.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.7 PK	74.0	-27.3	1.93 V	179	34.5	12.2
2	11910.00	36.5 AV	54.0	-17.5	1.93 V	179	24.3	12.2
3	17865.00	52.1 PK	74.0	-21.9	1.63 V	48	30.3	21.8
4	17865.00	41.8 AV	54.0	-12.2	1.63 V	48	20.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	2.98 H	89	34.6	13.1
2	#12830.00	37.7 AV	68.2	-30.5	2.98 H	89	24.6	13.1
3	19245.00	52.3 PK	74.0	-21.7	1.64 H	173	56.3	-4.0
4	19245.00	42.2 AV	54.0	-11.8	1.64 H	173	46.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.5 PK	88.2	-41.7	1.90 V	175	33.4	13.1
2	#12830.00	36.4 AV	68.2	-31.8	1.90 V	175	23.3	13.1
3	19245.00	52.2 PK	74.0	-21.8	1.64 V	47	56.2	-4.0
4	19245.00	41.9 AV	54.0	-12.1	1.64 V	47	45.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.2 PK	88.2	-40.0	2.90 H	107	34.9	13.3
2	#12870.00	38.2 AV	68.2	-30.0	2.90 H	107	24.9	13.3
3	19305.00	52.1 PK	74.0	-21.9	1.57 H	163	56.0	-3.9
4	19305.00	42.5 AV	54.0	-11.5	1.57 H	163	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.6 PK	88.2	-41.6	1.92 V	164	33.3	13.3
2	#12870.00	36.1 AV	68.2	-32.1	1.92 V	164	22.8	13.3
3	19305.00	52.7 PK	74.0	-21.3	1.61 V	41	56.6	-3.9
4	19305.00	42.2 AV	54.0	-11.8	1.61 V	41	46.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.4 PK	88.2	-40.8	2.90 H	115	34.1	13.3
2	#13030.00	37.5 AV	68.2	-30.7	2.90 H	115	24.2	13.3
3	19545.00	52.0 PK	74.0	-22.0	1.56 H	190	55.7	-3.7
4	19545.00	42.0 AV	54.0	-12.0	1.56 H	190	45.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.4 PK	88.2	-41.8	1.99 V	178	33.1	13.3
2	#13030.00	36.0 AV	68.2	-32.2	1.99 V	178	22.7	13.3
3	19545.00	52.7 PK	74.0	-21.3	1.59 V	42	56.4	-3.7
4	19545.00	42.3 AV	54.0	-11.7	1.59 V	42	46.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.6 PK	88.2	-40.6	2.92 H	91	34.3	13.3
2	#13070.00	37.9 AV	68.2	-30.3	2.92 H	91	24.6	13.3
3	19605.00	51.8 PK	74.0	-22.2	1.63 H	175	55.8	-4.0
4	19605.00	42.0 AV	54.0	-12.0	1.63 H	175	46.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.5 PK	88.2	-41.7	1.98 V	189	33.2	13.3
2	#13070.00	36.5 AV	68.2	-31.7	1.98 V	189	23.2	13.3
3	19605.00	52.2 PK	74.0	-21.8	1.63 V	36	56.2	-4.0
4	19605.00	42.1 AV	54.0	-11.9	1.63 V	36	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.4 PK	88.2	-39.8	2.91 H	105	33.2	15.2
2	#13750.00	38.3 AV	68.2	-29.9	2.91 H	105	23.1	15.2
3	20625.00	52.0 PK	74.0	-22.0	1.64 H	186	55.3	-3.3
4	20625.00	42.1 AV	54.0	-11.9	1.64 H	186	45.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.3 PK	88.2	-41.9	1.90 V	168	31.1	15.2
2	#13750.00	36.3 AV	68.2	-31.9	1.90 V	168	21.1	15.2
3	20625.00	52.2 PK	74.0	-21.8	1.57 V	43	55.5	-3.3
4	20625.00	41.9 AV	54.0	-12.1	1.57 V	43	45.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.7 PK	88.2	-40.5	2.99 H	98	32.3	15.4
2	#13990.00	38.1 AV	68.2	-30.1	2.99 H	98	22.7	15.4
3	20985.00	51.6 PK	74.0	-22.4	1.57 H	184	54.3	-2.7
4	20985.00	42.0 AV	54.0	-12.0	1.57 H	184	44.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.1 PK	88.2	-42.1	1.90 V	171	30.7	15.4
2	#13990.00	36.1 AV	68.2	-32.1	1.90 V	171	20.7	15.4
3	20985.00	52.1 PK	74.0	-21.9	1.65 V	47	54.8	-2.7
4	20985.00	41.5 AV	54.0	-12.5	1.65 V	47	44.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.3 PK	88.2	-39.9	2.93 H	115	33.0	15.3
2	#14230.00	38.1 AV	68.2	-30.1	2.93 H	115	22.8	15.3
3	21345.00	51.6 PK	74.0	-22.4	1.64 H	184	53.8	-2.2
4	21345.00	41.8 AV	54.0	-12.2	1.64 H	184	44.0	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.7 PK	88.2	-41.5	1.90 V	172	31.4	15.3
2	#14230.00	36.7 AV	68.2	-31.5	1.90 V	172	21.4	15.3
3	21345.00	51.8 PK	74.0	-22.2	1.67 V	57	54.0	-2.2
4	21345.00	41.7 AV	54.0	-12.3	1.67 V	57	43.9	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.8 PK	74.0	-26.2	2.96 H	87	35.6	12.2
2	11910.00	37.9 AV	54.0	-16.1	2.96 H	87	25.7	12.2
3	17865.00	52.2 PK	74.0	-21.8	1.63 H	161	30.4	21.8
4	17865.00	42.3 AV	54.0	-11.7	1.63 H	161	20.5	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.2 PK	74.0	-26.8	1.89 V	169	35.0	12.2
2	11910.00	36.8 AV	54.0	-17.2	1.89 V	169	24.6	12.2
3	17865.00	52.0 PK	74.0	-22.0	1.68 V	38	30.2	21.8
4	17865.00	41.8 AV	54.0	-12.2	1.68 V	38	20.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.6 PK	88.2	-40.6	3.00 H	116	34.5	13.1
2	#12830.00	37.9 AV	68.2	-30.3	3.00 H	116	24.8	13.1
3	19245.00	51.2 PK	74.0	-22.8	1.57 H	187	55.2	-4.0
4	19245.00	41.7 AV	54.0	-12.3	1.57 H	187	45.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.8 PK	88.2	-41.4	1.96 V	190	33.7	13.1
2	#12830.00	36.7 AV	68.2	-31.5	1.96 V	190	23.6	13.1
3	19245.00	52.2 PK	74.0	-21.8	1.57 V	40	56.2	-4.0
4	19245.00	41.7 AV	54.0	-12.3	1.57 V	40	45.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.4 PK	88.2	-39.8	2.94 H	99	35.1	13.3
2	#12870.00	38.3 AV	68.2	-29.9	2.94 H	99	25.0	13.3
3	19305.00	51.6 PK	74.0	-22.4	1.56 H	171	55.5	-3.9
4	19305.00	41.8 AV	54.0	-12.2	1.56 H	171	45.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.0 PK	88.2	-41.2	1.93 V	193	33.7	13.3
2	#12870.00	36.8 AV	68.2	-31.4	1.93 V	193	23.5	13.3
3	19305.00	52.6 PK	74.0	-21.4	1.60 V	36	56.5	-3.9
4	19305.00	42.0 AV	54.0	-12.0	1.60 V	36	45.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.7 PK	88.2	-40.5	2.92 H	100	34.4	13.3
2	#13030.00	37.9 AV	68.2	-30.3	2.92 H	100	24.6	13.3
3	19545.00	52.5 PK	74.0	-21.5	1.56 H	185	56.2	-3.7
4	19545.00	42.6 AV	54.0	-11.4	1.56 H	185	46.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.9 PK	88.2	-41.3	1.89 V	176	33.6	13.3
2	#13030.00	36.5 AV	68.2	-31.7	1.89 V	176	23.2	13.3
3	19545.00	52.0 PK	74.0	-22.0	1.63 V	50	55.7	-3.7
4	19545.00	41.5 AV	54.0	-12.5	1.63 V	50	45.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.7 PK	88.2	-40.5	2.97 H	110	34.4	13.3
2	#13070.00	37.9 AV	68.2	-30.3	2.97 H	110	24.6	13.3
3	19605.00	52.1 PK	74.0	-21.9	1.60 H	180	56.1	-4.0
4	19605.00	42.5 AV	54.0	-11.5	1.60 H	180	46.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.0 PK	88.2	-41.2	1.94 V	182	33.7	13.3
2	#13070.00	36.6 AV	68.2	-31.6	1.94 V	182	23.3	13.3
3	19605.00	52.3 PK	74.0	-21.7	1.68 V	37	56.3	-4.0
4	19605.00	42.0 AV	54.0	-12.0	1.68 V	37	46.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.3 PK	88.2	-40.9	2.94 H	104	32.1	15.2
2	#13750.00	37.6 AV	68.2	-30.6	2.94 H	104	22.4	15.2
3	20625.00	51.5 PK	74.0	-22.5	1.59 H	167	54.8	-3.3
4	20625.00	41.8 AV	54.0	-12.2	1.59 H	167	45.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.7 PK	88.2	-41.5	1.91 V	175	31.5	15.2
2	#13750.00	36.7 AV	68.2	-31.5	1.91 V	175	21.5	15.2
3	20625.00	51.7 PK	74.0	-22.3	1.59 V	57	55.0	-3.3
4	20625.00	41.4 AV	54.0	-12.6	1.59 V	57	44.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.9 PK	88.2	-40.3	2.99 H	113	32.5	15.4
2	#13990.00	38.3 AV	68.2	-29.9	2.99 H	113	22.9	15.4
3	20985.00	52.5 PK	74.0	-21.5	1.57 H	177	55.2	-2.7
4	20985.00	42.6 AV	54.0	-11.4	1.57 H	177	45.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.6 PK	88.2	-41.6	1.91 V	190	31.2	15.4
2	#13990.00	36.4 AV	68.2	-31.8	1.91 V	190	21.0	15.4
3	20985.00	52.5 PK	74.0	-21.5	1.66 V	48	55.2	-2.7
4	20985.00	42.1 AV	54.0	-11.9	1.66 V	48	44.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.3 PK	88.2	-39.9	2.96 H	85	33.0	15.3
2	#14230.00	38.4 AV	68.2	-29.8	2.96 H	85	23.1	15.3
3	21345.00	52.5 PK	74.0	-21.5	1.66 H	177	54.7	-2.2
4	21345.00	42.5 AV	54.0	-11.5	1.66 H	177	44.7	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.6 PK	88.2	-41.6	1.96 V	194	31.3	15.3
2	#14230.00	36.5 AV	68.2	-31.7	1.96 V	194	21.2	15.3
3	21345.00	51.9 PK	74.0	-22.1	1.67 V	42	54.1	-2.2
4	21345.00	41.7 AV	54.0	-12.3	1.67 V	42	43.9	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.3 PK	74.0	-25.7	2.89 H	85	36.1	12.2
2	11910.00	38.1 AV	54.0	-15.9	2.89 H	85	25.9	12.2
3	17865.00	51.7 PK	74.0	-22.3	1.60 H	189	29.9	21.8
4	17865.00	42.1 AV	54.0	-11.9	1.60 H	189	20.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.5 PK	74.0	-27.5	1.98 V	172	34.3	12.2
2	11910.00	36.1 AV	54.0	-17.9	1.98 V	172	23.9	12.2
3	17865.00	52.6 PK	74.0	-21.4	1.62 V	57	30.8	21.8
4	17865.00	42.1 AV	54.0	-11.9	1.62 V	57	20.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.8 PK	88.2	-40.4	2.89 H	108	34.7	13.1
2	#12830.00	37.8 AV	68.2	-30.4	2.89 H	108	24.7	13.1
3	19245.00	52.5 PK	74.0	-21.5	1.64 H	191	56.5	-4.0
4	19245.00	42.6 AV	54.0	-11.4	1.64 H	191	46.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.2 PK	88.2	-42.0	1.88 V	172	33.1	13.1
2	#12830.00	36.2 AV	68.2	-32.0	1.88 V	172	23.1	13.1
3	19245.00	52.6 PK	74.0	-21.4	1.67 V	56	56.6	-4.0
4	19245.00	42.1 AV	54.0	-11.9	1.67 V	56	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.1 PK	88.2	-40.1	2.92 H	112	34.8	13.3
2	#12870.00	38.1 AV	68.2	-30.1	2.92 H	112	24.8	13.3
3	19305.00	52.0 PK	74.0	-22.0	1.63 H	188	55.9	-3.9
4	19305.00	42.1 AV	54.0	-11.9	1.63 H	188	46.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.0 PK	88.2	-42.2	1.93 V	179	32.7	13.3
2	#12870.00	36.0 AV	68.2	-32.2	1.93 V	179	22.7	13.3
3	19305.00	51.9 PK	74.0	-22.1	1.60 V	54	55.8	-3.9
4	19305.00	41.6 AV	54.0	-12.4	1.60 V	54	45.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.6 PK	88.2	-40.6	2.94 H	95	34.3	13.3
2	#13030.00	37.9 AV	68.2	-30.3	2.94 H	95	24.6	13.3
3	19545.00	51.5 PK	74.0	-22.5	1.57 H	183	55.2	-3.7
4	19545.00	41.8 AV	54.0	-12.2	1.57 H	183	45.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.3 PK	88.2	-41.9	1.88 V	172	33.0	13.3
2	#13030.00	36.0 AV	68.2	-32.2	1.88 V	172	22.7	13.3
3	19545.00	51.9 PK	74.0	-22.1	1.68 V	34	55.6	-3.7
4	19545.00	41.6 AV	54.0	-12.4	1.68 V	34	45.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.9 PK	88.2	-39.3	2.95 H	128	35.6	13.3
2	#13070.00	38.1 AV	68.2	-30.1	2.95 H	128	24.8	13.3
3	19605.00	50.4 PK	74.0	-23.6	1.46 H	163	54.4	-4.0
4	19605.00	41.4 AV	54.0	-12.6	1.46 H	163	45.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.9 PK	88.2	-41.3	1.91 V	192	33.6	13.3
2	#13070.00	36.4 AV	68.2	-31.8	1.91 V	192	23.1	13.3
3	19605.00	52.4 PK	74.0	-21.6	1.68 V	54	56.4	-4.0
4	19605.00	42.0 AV	54.0	-12.0	1.68 V	54	46.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.0 PK	88.2	-40.2	2.92 H	97	32.8	15.2
2	#13750.00	38.0 AV	68.2	-30.2	2.92 H	97	22.8	15.2
3	20625.00	51.5 PK	74.0	-22.5	1.58 H	178	54.8	-3.3
4	20625.00	41.9 AV	54.0	-12.1	1.58 H	178	45.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.1 PK	88.2	-41.1	1.97 V	173	31.9	15.2
2	#13750.00	36.7 AV	68.2	-31.5	1.97 V	173	21.5	15.2
3	20625.00	52.2 PK	74.0	-21.8	1.66 V	61	55.5	-3.3
4	20625.00	41.8 AV	54.0	-12.2	1.66 V	61	45.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.7 PK	88.2	-40.5	3.00 H	87	32.3	15.4
2	#13990.00	38.0 AV	68.2	-30.2	3.00 H	87	22.6	15.4
3	20985.00	52.1 PK	74.0	-21.9	1.65 H	177	54.8	-2.7
4	20985.00	42.3 AV	54.0	-11.7	1.65 H	177	45.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.6 PK	88.2	-41.6	1.97 V	167	31.2	15.4
2	#13990.00	36.5 AV	68.2	-31.7	1.97 V	167	21.1	15.4
3	20985.00	51.9 PK	74.0	-22.1	1.57 V	59	54.6	-2.7
4	20985.00	41.5 AV	54.0	-12.5	1.57 V	59	44.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.9 PK	88.2	-40.3	2.97 H	115	32.6	15.3
2	#14230.00	37.8 AV	68.2	-30.4	2.97 H	115	22.5	15.3
3	21345.00	52.0 PK	74.0	-22.0	1.64 H	177	54.2	-2.2
4	21345.00	42.4 AV	54.0	-11.6	1.64 H	177	44.6	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.9 PK	88.2	-41.3	1.92 V	171	31.6	15.3
2	#14230.00	36.6 AV	68.2	-31.6	1.92 V	171	21.3	15.3
3	21345.00	51.5 PK	74.0	-22.5	1.60 V	53	53.7	-2.2
4	21345.00	41.5 AV	54.0	-12.5	1.60 V	53	43.7	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.7 PK	74.0	-26.3	2.93 H	112	35.5	12.2
2	11970.00	37.9 AV	54.0	-16.1	2.93 H	112	25.7	12.2
3	17955.00	52.1 PK	74.0	-21.9	1.60 H	172	28.9	23.2
4	17955.00	42.2 AV	54.0	-11.8	1.60 H	172	19.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	46.6 PK	74.0	-27.4	1.96 V	183	34.4	12.2
2	11970.00	36.3 AV	54.0	-17.7	1.96 V	183	24.1	12.2
3	17955.00	51.6 PK	74.0	-22.4	1.64 V	53	28.4	23.2
4	17955.00	41.4 AV	54.0	-12.6	1.64 V	53	18.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.8 PK	88.2	-40.4	2.89 H	93	34.7	13.1
2	#12770.00	38.1 AV	68.2	-30.1	2.89 H	93	25.0	13.1
3	19155.00	51.5 PK	74.0	-22.5	1.59 H	162	55.7	-4.2
4	19155.00	41.9 AV	54.0	-12.1	1.59 H	162	46.1	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.2 PK	88.2	-41.0	1.93 V	181	34.1	13.1
2	#12770.00	36.9 AV	68.2	-31.3	1.93 V	181	23.8	13.1
3	19155.00	52.0 PK	74.0	-22.0	1.62 V	43	56.2	-4.2
4	19155.00	41.7 AV	54.0	-12.3	1.62 V	43	45.9	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.7 PK	88.2	-40.5	2.94 H	99	34.3	13.4
2	#12930.00	37.9 AV	68.2	-30.3	2.94 H	99	24.5	13.4
3	19395.00	52.1 PK	74.0	-21.9	1.63 H	184	55.6	-3.5
4	19395.00	42.6 AV	54.0	-11.4	1.63 H	184	46.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.2 PK	88.2	-41.0	1.94 V	178	33.8	13.4
2	#12930.00	36.7 AV	68.2	-31.5	1.94 V	178	23.3	13.4
3	19395.00	52.2 PK	74.0	-21.8	1.68 V	47	55.7	-3.5
4	19395.00	42.2 AV	54.0	-11.8	1.68 V	47	45.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.9 PK	88.2	-39.3	2.94 H	104	35.4	13.5
2	#13090.00	38.3 AV	68.2	-29.9	2.94 H	104	24.8	13.5
3	19635.00	50.5 PK	74.0	-23.5	1.53 H	176	54.5	-4.0
4	19635.00	41.5 AV	54.0	-12.5	1.53 H	176	45.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	47.1 PK	88.2	-41.1	1.94 V	169	33.6	13.5
2	#13090.00	36.8 AV	68.2	-31.4	1.94 V	169	23.3	13.5
3	19635.00	52.4 PK	74.0	-21.6	1.67 V	50	56.4	-4.0
4	19635.00	42.1 AV	54.0	-11.9	1.67 V	50	46.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	49.4 PK	88.2	-38.8	2.93 H	95	34.3	15.1
2	#13730.00	38.5 AV	68.2	-29.7	2.93 H	95	23.4	15.1
3	20595.00	50.8 PK	74.0	-23.2	1.51 H	166	54.2	-3.4
4	20595.00	41.8 AV	54.0	-12.2	1.51 H	166	45.2	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	47.4 PK	88.2	-40.8	1.87 V	181	32.3	15.1
2	#13730.00	37.0 AV	68.2	-31.2	1.87 V	181	21.9	15.1
3	20595.00	52.1 PK	74.0	-21.9	1.62 V	62	55.5	-3.4
4	20595.00	42.1 AV	54.0	-11.9	1.62 V	62	45.5	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.1 PK	88.2	-40.1	2.93 H	126	33.2	14.9
2	#13890.00	37.4 AV	68.2	-30.8	2.93 H	126	22.5	14.9
3	20835.00	50.4 PK	74.0	-23.6	1.52 H	169	53.1	-2.7
4	20835.00	41.1 AV	54.0	-12.9	1.52 H	169	43.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	46.9 PK	88.2	-41.3	1.90 V	193	32.0	14.9
2	#13890.00	36.6 AV	68.2	-31.6	1.90 V	193	21.7	14.9
3	20835.00	52.3 PK	74.0	-21.7	1.67 V	52	55.0	-2.7
4	20835.00	41.8 AV	54.0	-12.2	1.67 V	52	44.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	49.0 PK	88.2	-39.2	3.00 H	112	33.6	15.4
2	#14050.00	38.2 AV	68.2	-30.0	3.00 H	112	22.8	15.4
3	21075.00	50.6 PK	74.0	-23.4	1.59 H	185	53.3	-2.7
4	21075.00	41.4 AV	54.0	-12.6	1.59 H	185	44.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	46.1 PK	88.2	-42.1	1.90 V	183	30.7	15.4
2	#14050.00	36.1 AV	68.2	-32.1	1.90 V	183	20.7	15.4
3	21075.00	52.4 PK	74.0	-21.6	1.61 V	55	55.1	-2.7
4	21075.00	42.2 AV	54.0	-11.8	1.61 V	55	44.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.0 PK	74.0	-25.0	2.91 H	114	36.5	12.5
2	12050.00	38.2 AV	54.0	-15.8	2.91 H	114	25.7	12.5
3	18075.00	50.9 PK	74.0	-23.1	1.50 H	187	55.4	-4.5
4	18075.00	42.0 AV	54.0	-12.0	1.50 H	187	46.5	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.8 PK	74.0	-27.2	1.96 V	182	34.3	12.5
2	12050.00	36.6 AV	54.0	-17.4	1.96 V	182	24.1	12.5
3	18075.00	52.0 PK	74.0	-22.0	1.58 V	46	56.5	-4.5
4	18075.00	41.6 AV	54.0	-12.4	1.58 V	46	46.1	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.4 PK	74.0	-24.6	2.92 H	92	36.4	13.0
2	12690.00	38.7 AV	54.0	-15.3	2.92 H	92	25.7	13.0
3	19035.00	50.1 PK	74.0	-23.9	1.53 H	163	54.2	-4.1
4	19035.00	41.0 AV	54.0	-13.0	1.53 H	163	45.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.0 PK	74.0	-27.0	1.91 V	187	34.0	13.0
2	12690.00	37.0 AV	54.0	-17.0	1.91 V	187	24.0	13.0
3	19035.00	51.9 PK	74.0	-22.1	1.58 V	48	56.0	-4.1
4	19035.00	41.5 AV	54.0	-12.5	1.58 V	48	45.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.5 PK	88.2	-39.7	2.95 H	92	35.3	13.2
2	#13010.00	38.2 AV	68.2	-30.0	2.95 H	92	25.0	13.2
3	19515.00	50.7 PK	74.0	-23.3	1.56 H	181	54.2	-3.5
4	19515.00	41.4 AV	54.0	-12.6	1.56 H	181	44.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	47.1 PK	88.2	-41.1	1.96 V	163	33.9	13.2
2	#13010.00	36.7 AV	68.2	-31.5	1.96 V	163	23.5	13.2
3	19515.00	52.2 PK	74.0	-21.8	1.59 V	38	55.7	-3.5
4	19515.00	42.0 AV	54.0	-12.0	1.59 V	38	45.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.3 PK	74.0	-24.7	2.98 H	101	35.5	13.8
2	13330.00	38.7 AV	54.0	-15.3	2.98 H	101	24.9	13.8
3	19995.00	50.0 PK	74.0	-24.0	1.47 H	161	53.8	-3.8
4	19995.00	41.1 AV	54.0	-12.9	1.47 H	161	44.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.1 PK	74.0	-26.9	1.91 V	174	33.3	13.8
2	13330.00	36.7 AV	54.0	-17.3	1.91 V	174	22.9	13.8
3	19995.00	52.5 PK	74.0	-21.5	1.62 V	43	56.3	-3.8
4	19995.00	42.2 AV	54.0	-11.8	1.62 V	43	46.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.7 PK	88.2	-39.5	2.90 H	90	33.6	15.1
2	#13650.00	38.1 AV	68.2	-30.1	2.90 H	90	23.0	15.1
3	20475.00	50.8 PK	74.0	-23.2	1.56 H	175	53.7	-2.9
4	20475.00	41.6 AV	54.0	-12.4	1.56 H	175	44.5	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.6 PK	88.2	-41.6	1.87 V	178	31.5	15.1
2	#13650.00	36.7 AV	68.2	-31.5	1.87 V	178	21.6	15.1
3	20475.00	51.9 PK	74.0	-22.1	1.57 V	41	54.8	-2.9
4	20475.00	41.5 AV	54.0	-12.5	1.57 V	41	44.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.3 PK	88.2	-39.9	2.89 H	95	33.0	15.3
2	#13970.00	37.8 AV	68.2	-30.4	2.89 H	95	22.5	15.3
3	20955.00	50.8 PK	74.0	-23.2	1.56 H	180	53.4	-2.6
4	20955.00	41.6 AV	54.0	-12.4	1.56 H	180	44.2	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.6 PK	88.2	-41.6	1.95 V	191	31.3	15.3
2	#13970.00	36.6 AV	68.2	-31.6	1.95 V	191	21.3	15.3
3	20955.00	51.9 PK	74.0	-22.1	1.58 V	45	54.5	-2.6
4	20955.00	41.9 AV	54.0	-12.1	1.58 V	45	44.5	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.7 PK	74.0	-25.3	3.00 H	106	36.2	12.5
2	12050.00	37.8 AV	54.0	-16.2	3.00 H	106	25.3	12.5
3	18075.00	50.8 PK	74.0	-23.2	1.58 H	170	55.3	-4.5
4	18075.00	41.7 AV	54.0	-12.3	1.58 H	170	46.2	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.6 PK	74.0	-27.4	1.98 V	190	34.1	12.5
2	12050.00	36.5 AV	54.0	-17.5	1.98 V	190	24.0	12.5
3	18075.00	51.9 PK	74.0	-22.1	1.69 V	61	56.4	-4.5
4	18075.00	41.8 AV	54.0	-12.2	1.69 V	61	46.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.7 PK	74.0	-25.3	2.98 H	105	35.7	13.0
2	12690.00	38.1 AV	54.0	-15.9	2.98 H	105	25.1	13.0
3	19035.00	50.3 PK	74.0	-23.7	1.58 H	168	54.4	-4.1
4	19035.00	41.4 AV	54.0	-12.6	1.58 H	168	45.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.0 PK	74.0	-27.0	1.96 V	175	34.0	13.0
2	12690.00	36.8 AV	54.0	-17.2	1.96 V	175	23.8	13.0
3	19035.00	52.0 PK	74.0	-22.0	1.62 V	47	56.1	-4.1
4	19035.00	41.5 AV	54.0	-12.5	1.62 V	47	45.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.4 PK	88.2	-39.8	2.97 H	103	35.2	13.2
2	#13010.00	38.0 AV	68.2	-30.2	2.97 H	103	24.8	13.2
3	19515.00	50.5 PK	74.0	-23.5	1.57 H	180	54.0	-3.5
4	19515.00	41.6 AV	54.0	-12.4	1.57 H	180	45.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	46.8 PK	88.2	-41.4	1.93 V	180	33.6	13.2
2	#13010.00	36.7 AV	68.2	-31.5	1.93 V	180	23.5	13.2
3	19515.00	51.5 PK	74.0	-22.5	1.63 V	36	55.0	-3.5
4	19515.00	41.4 AV	54.0	-12.6	1.63 V	36	44.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.4 PK	74.0	-24.6	2.93 H	107	35.6	13.8
2	13330.00	38.6 AV	54.0	-15.4	2.93 H	107	24.8	13.8
3	19995.00	50.8 PK	74.0	-23.2	1.54 H	174	54.6	-3.8
4	19995.00	41.8 AV	54.0	-12.2	1.54 H	174	45.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.1 PK	74.0	-26.9	1.95 V	167	33.3	13.8
2	13330.00	36.8 AV	54.0	-17.2	1.95 V	167	23.0	13.8
3	19995.00	51.4 PK	74.0	-22.6	1.66 V	41	55.2	-3.8
4	19995.00	41.4 AV	54.0	-12.6	1.66 V	41	45.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.5 PK	88.2	-39.7	2.96 H	90	33.4	15.1
2	#13650.00	37.9 AV	68.2	-30.3	2.96 H	90	22.8	15.1
3	20475.00	50.8 PK	74.0	-23.2	1.58 H	187	53.7	-2.9
4	20475.00	42.0 AV	54.0	-12.0	1.58 H	187	44.9	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.3 PK	88.2	-41.9	1.99 V	165	31.2	15.1
2	#13650.00	36.3 AV	68.2	-31.9	1.99 V	165	21.2	15.1
3	20475.00	52.7 PK	74.0	-21.3	1.59 V	52	55.6	-2.9
4	20475.00	42.2 AV	54.0	-11.8	1.59 V	52	45.1	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.5 PK	88.2	-38.7	2.89 H	115	34.2	15.3
2	#13970.00	38.8 AV	68.2	-29.4	2.89 H	115	23.5	15.3
3	20955.00	50.9 PK	74.0	-23.1	1.48 H	161	53.5	-2.6
4	20955.00	41.7 AV	54.0	-12.3	1.48 H	161	44.3	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.6 PK	88.2	-41.6	1.96 V	164	31.3	15.3
2	#13970.00	36.7 AV	68.2	-31.5	1.96 V	164	21.4	15.3
3	20955.00	51.9 PK	74.0	-22.1	1.59 V	33	54.5	-2.6
4	20955.00	41.7 AV	54.0	-12.3	1.59 V	33	44.3	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	50.3 PK	74.0	-23.7	2.94 H	98	38.1	12.2
2	11910.00	39.5 AV	54.0	-14.5	2.94 H	98	27.3	12.2
3	17865.00	54.3 PK	74.0	-19.7	1.44 H	217	32.5	21.8
4	17865.00	43.8 AV	54.0	-10.2	1.44 H	217	22.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.7 PK	74.0	-26.3	2.00 V	206	35.5	12.2
2	11910.00	39.1 AV	54.0	-14.9	2.00 V	206	26.9	12.2
3	17865.00	54.8 PK	74.0	-19.2	1.84 V	83	33.0	21.8
4	17865.00	43.4 AV	54.0	-10.6	1.84 V	83	21.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.6 PK	74.0	-23.4	2.94 H	100	38.2	12.4
2	12350.00	39.7 AV	54.0	-14.3	2.94 H	100	27.3	12.4
3	18525.00	53.9 PK	74.0	-20.1	1.41 H	222	58.6	-4.7
4	18525.00	43.3 AV	54.0	-10.7	1.41 H	222	48.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.5 PK	74.0	-26.5	2.04 V	199	35.1	12.4
2	12350.00	38.8 AV	54.0	-15.2	2.04 V	199	26.4	12.4
3	18525.00	54.9 PK	74.0	-19.1	1.83 V	85	59.6	-4.7
4	18525.00	43.3 AV	54.0	-10.7	1.83 V	85	48.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	50.1 PK	88.2	-38.1	2.91 H	88	37.0	13.1
2	#12830.00	39.2 AV	68.2	-29.0	2.91 H	88	26.1	13.1
3	19245.00	54.8 PK	74.0	-19.2	1.41 H	229	58.8	-4.0
4	19245.00	44.1 AV	54.0	-9.9	1.41 H	229	48.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.6 PK	88.2	-40.6	1.96 V	198	34.5	13.1
2	#12830.00	38.8 AV	68.2	-29.4	1.96 V	198	25.7	13.1
3	19245.00	54.7 PK	74.0	-19.3	1.83 V	76	58.7	-4.0
4	19245.00	43.2 AV	54.0	-10.8	1.83 V	76	47.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	50.8 PK	88.2	-37.4	2.91 H	92	37.5	13.3
2	#12870.00	39.7 AV	68.2	-28.5	2.91 H	92	26.4	13.3
3	19305.00	54.5 PK	74.0	-19.5	1.38 H	208	58.4	-3.9
4	19305.00	43.8 AV	54.0	-10.2	1.38 H	208	47.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.8 PK	88.2	-40.4	1.99 V	199	34.5	13.3
2	#12870.00	39.4 AV	68.2	-28.8	1.99 V	199	26.1	13.3
3	19305.00	54.8 PK	74.0	-19.2	1.82 V	94	58.7	-3.9
4	19305.00	43.5 AV	54.0	-10.5	1.82 V	94	47.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.6 PK	88.2	-38.6	2.99 H	84	36.3	13.3
2	#12950.00	39.1 AV	68.2	-29.1	2.99 H	84	25.8	13.3
3	19425.00	53.8 PK	74.0	-20.2	1.39 H	230	57.3	-3.5
4	19425.00	43.3 AV	54.0	-10.7	1.39 H	230	46.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	47.8 PK	88.2	-40.4	2.03 V	209	34.5	13.3
2	#12950.00	39.1 AV	68.2	-29.1	2.03 V	209	25.8	13.3
3	19425.00	54.6 PK	74.0	-19.4	1.85 V	77	58.1	-3.5
4	19425.00	43.2 AV	54.0	-10.8	1.85 V	77	46.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	50.4 PK	88.2	-37.8	2.88 H	104	37.1	13.3
2	#13030.00	39.7 AV	68.2	-28.5	2.88 H	104	26.4	13.3
3	19545.00	54.0 PK	74.0	-20.0	1.42 H	206	57.7	-3.7
4	19545.00	43.6 AV	54.0	-10.4	1.42 H	206	47.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.7 PK	88.2	-40.5	1.97 V	212	34.4	13.3
2	#13030.00	39.3 AV	68.2	-28.9	1.97 V	212	26.0	13.3
3	19545.00	55.1 PK	74.0	-18.9	1.81 V	97	58.8	-3.7
4	19545.00	43.5 AV	54.0	-10.5	1.81 V	97	47.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.3 PK	88.2	-37.9	2.93 H	95	37.0	13.3
2	#13070.00	39.3 AV	68.2	-28.9	2.93 H	95	26.0	13.3
3	19605.00	53.9 PK	74.0	-20.1	1.49 H	224	57.9	-4.0
4	19605.00	43.3 AV	54.0	-10.7	1.49 H	224	47.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	2.02 V	205	35.0	13.3
2	#13070.00	39.6 AV	68.2	-28.6	2.02 V	205	26.3	13.3
3	19605.00	54.7 PK	74.0	-19.3	1.84 V	89	58.7	-4.0
4	19605.00	43.0 AV	54.0	-11.0	1.84 V	89	47.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	50.0 PK	74.0	-24.0	2.96 H	109	35.9	14.1
2	13390.00	39.4 AV	54.0	-14.6	2.96 H	109	25.3	14.1
3	20085.00	54.9 PK	74.0	-19.1	1.44 H	231	58.3	-3.4
4	20085.00	44.3 AV	54.0	-9.7	1.44 H	231	47.7	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.7 PK	74.0	-26.3	1.95 V	192	33.6	14.1
2	13390.00	38.8 AV	54.0	-15.2	1.95 V	192	24.7	14.1
3	20085.00	54.2 PK	74.0	-19.8	1.81 V	91	57.6	-3.4
4	20085.00	43.1 AV	54.0	-10.9	1.81 V	91	46.5	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.4 PK	88.2	-37.8	2.93 H	93	35.2	15.2
2	#13710.00	39.4 AV	68.2	-28.8	2.93 H	93	24.2	15.2
3	20565.00	54.7 PK	74.0	-19.3	1.40 H	226	57.9	-3.2
4	20565.00	43.9 AV	54.0	-10.1	1.40 H	226	47.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.5 PK	88.2	-40.7	1.98 V	216	32.3	15.2
2	#13710.00	38.8 AV	68.2	-29.4	1.98 V	216	23.6	15.2
3	20565.00	54.5 PK	74.0	-19.5	1.87 V	69	57.7	-3.2
4	20565.00	43.0 AV	54.0	-11.0	1.87 V	69	46.2	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	50.9 PK	88.2	-37.3	2.93 H	113	35.7	15.2
2	#13750.00	39.9 AV	68.2	-28.3	2.93 H	113	24.7	15.2
3	20625.00	54.2 PK	74.0	-19.8	1.41 H	202	57.5	-3.3
4	20625.00	43.7 AV	54.0	-10.3	1.41 H	202	47.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.8 PK	88.2	-40.4	1.99 V	199	32.6	15.2
2	#13750.00	39.1 AV	68.2	-29.1	1.99 V	199	23.9	15.2
3	20625.00	54.7 PK	74.0	-19.3	1.87 V	84	58.0	-3.3
4	20625.00	43.5 AV	54.0	-10.5	1.87 V	84	46.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	50.0 PK	88.2	-38.2	3.00 H	109	34.6	15.4
2	#13990.00	39.3 AV	68.2	-28.9	3.00 H	109	23.9	15.4
3	20985.00	54.1 PK	74.0	-19.9	1.41 H	230	56.8	-2.7
4	20985.00	43.6 AV	54.0	-10.4	1.41 H	230	46.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.7 PK	88.2	-40.5	1.96 V	192	32.3	15.4
2	#13990.00	38.9 AV	68.2	-29.3	1.96 V	192	23.5	15.4
3	20985.00	55.1 PK	74.0	-18.9	1.79 V	80	57.8	-2.7
4	20985.00	43.9 AV	54.0	-10.1	1.79 V	80	46.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	50.6 PK	88.2	-37.6	2.97 H	103	35.3	15.3
2	#14230.00	39.8 AV	68.2	-28.4	2.97 H	103	24.5	15.3
3	21345.00	54.0 PK	74.0	-20.0	1.40 H	214	56.2	-2.2
4	21345.00	43.4 AV	54.0	-10.6	1.40 H	214	45.6	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.0 PK	88.2	-41.2	1.98 V	211	31.7	15.3
2	#14230.00	38.7 AV	68.2	-29.5	1.98 V	211	23.4	15.3
3	21345.00	54.6 PK	74.0	-19.4	1.88 V	86	56.8	-2.2
4	21345.00	43.3 AV	54.0	-10.7	1.88 V	86	45.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.8 PK	74.0	-24.2	2.94 H	95	37.6	12.2
2	11910.00	39.2 AV	54.0	-14.8	2.94 H	95	27.0	12.2
3	17865.00	54.7 PK	74.0	-19.3	1.43 H	231	32.9	21.8
4	17865.00	43.9 AV	54.0	-10.1	1.43 H	231	22.1	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.8 PK	74.0	-27.2	1.94 V	183	34.6	12.2
2	11910.00	37.8 AV	54.0	-16.2	1.94 V	183	25.6	12.2
3	17865.00	55.0 PK	74.0	-19.0	1.71 V	103	33.2	21.8
4	17865.00	44.1 AV	54.0	-9.9	1.71 V	103	22.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.1 PK	74.0	-23.9	3.00 H	114	37.7	12.4
2	12350.00	39.1 AV	54.0	-14.9	3.00 H	114	26.7	12.4
3	18525.00	54.0 PK	74.0	-20.0	1.48 H	215	58.7	-4.7
4	18525.00	43.6 AV	54.0	-10.4	1.48 H	215	48.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.5 PK	74.0	-26.5	1.80 V	153	35.1	12.4
2	12350.00	37.4 AV	54.0	-16.6	1.80 V	153	25.0	12.4
3	18525.00	54.1 PK	74.0	-19.9	1.70 V	36	58.8	-4.7
4	18525.00	44.2 AV	54.0	-9.8	1.70 V	36	48.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	50.4 PK	88.2	-37.8	2.97 H	88	37.3	13.1
2	#12830.00	39.5 AV	68.2	-28.7	2.97 H	88	26.4	13.1
3	19245.00	54.4 PK	74.0	-19.6	1.50 H	202	58.4	-4.0
4	19245.00	44.1 AV	54.0	-9.9	1.50 H	202	48.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.9 PK	88.2	-41.3	1.83 V	160	33.8	13.1
2	#12830.00	37.1 AV	68.2	-31.1	1.83 V	160	24.0	13.1
3	19245.00	54.3 PK	74.0	-19.7	1.68 V	37	58.3	-4.0
4	19245.00	44.6 AV	54.0	-9.4	1.68 V	37	48.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.9 PK	88.2	-38.3	2.92 H	106	36.6	13.3
2	#12870.00	39.2 AV	68.2	-29.0	2.92 H	106	25.9	13.3
3	19305.00	54.3 PK	74.0	-19.7	1.42 H	210	58.2	-3.9
4	19305.00	43.9 AV	54.0	-10.1	1.42 H	210	47.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.4 PK	88.2	-40.8	1.84 V	138	34.1	13.3
2	#12870.00	37.2 AV	68.2	-31.0	1.84 V	138	23.9	13.3
3	19305.00	54.3 PK	74.0	-19.7	1.67 V	49	58.2	-3.9
4	19305.00	44.5 AV	54.0	-9.5	1.67 V	49	48.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	50.1 PK	88.2	-38.1	2.94 H	104	36.8	13.3
2	#12950.00	39.4 AV	68.2	-28.8	2.94 H	104	26.1	13.3
3	19425.00	54.4 PK	74.0	-19.6	1.47 H	208	57.9	-3.5
4	19425.00	43.9 AV	54.0	-10.1	1.47 H	208	47.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	47.3 PK	88.2	-40.9	1.80 V	160	34.0	13.3
2	#12950.00	37.4 AV	68.2	-30.8	1.80 V	160	24.1	13.3
3	19425.00	54.2 PK	74.0	-19.8	1.71 V	21	57.7	-3.5
4	19425.00	44.5 AV	54.0	-9.5	1.71 V	21	48.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	50.3 PK	88.2	-37.9	2.96 H	112	37.0	13.3
2	#13030.00	39.7 AV	68.2	-28.5	2.96 H	112	26.4	13.3
3	19545.00	54.0 PK	74.0	-20.0	1.49 H	231	57.7	-3.7
4	19545.00	43.8 AV	54.0	-10.2	1.49 H	231	47.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.7 PK	88.2	-40.5	1.76 V	154	34.4	13.3
2	#13030.00	37.6 AV	68.2	-30.6	1.76 V	154	24.3	13.3
3	19545.00	54.6 PK	74.0	-19.4	1.68 V	22	58.3	-3.7
4	19545.00	44.6 AV	54.0	-9.4	1.68 V	22	48.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.2 PK	88.2	-38.0	2.94 H	92	36.9	13.3
2	#13070.00	39.7 AV	68.2	-28.5	2.94 H	92	26.4	13.3
3	19605.00	55.0 PK	74.0	-19.0	1.39 H	208	59.0	-4.0
4	19605.00	44.2 AV	54.0	-9.8	1.39 H	208	48.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.3 PK	88.2	-40.9	1.79 V	163	34.0	13.3
2	#13070.00	37.3 AV	68.2	-30.9	1.79 V	163	24.0	13.3
3	19605.00	54.0 PK	74.0	-20.0	1.67 V	49	58.0	-4.0
4	19605.00	43.9 AV	54.0	-10.1	1.67 V	49	47.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	51.0 PK	74.0	-23.0	2.90 H	101	36.9	14.1
2	13390.00	39.9 AV	54.0	-14.1	2.90 H	101	25.8	14.1
3	20085.00	53.5 PK	74.0	-20.5	1.44 H	223	56.9	-3.4
4	20085.00	43.3 AV	54.0	-10.7	1.44 H	223	46.7	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.2 PK	74.0	-25.8	1.78 V	145	34.1	14.1
2	13390.00	37.9 AV	54.0	-16.1	1.78 V	145	23.8	14.1
3	20085.00	53.8 PK	74.0	-20.2	1.65 V	43	57.2	-3.4
4	20085.00	43.9 AV	54.0	-10.1	1.65 V	43	47.3	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.5 PK	88.2	-37.7	3.00 H	84	35.3	15.2
2	#13710.00	39.7 AV	68.2	-28.5	3.00 H	84	24.5	15.2
3	20565.00	54.4 PK	74.0	-19.6	1.46 H	214	57.6	-3.2
4	20565.00	44.2 AV	54.0	-9.8	1.46 H	214	47.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.9 PK	88.2	-40.3	1.77 V	158	32.7	15.2
2	#13710.00	37.7 AV	68.2	-30.5	1.77 V	158	22.5	15.2
3	20565.00	53.7 PK	74.0	-20.3	1.74 V	33	56.9	-3.2
4	20565.00	44.1 AV	54.0	-9.9	1.74 V	33	47.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	50.2 PK	88.2	-38.0	2.95 H	110	35.0	15.2
2	#13750.00	39.3 AV	68.2	-28.9	2.95 H	110	24.1	15.2
3	20625.00	54.3 PK	74.0	-19.7	1.50 H	219	57.6	-3.3
4	20625.00	43.9 AV	54.0	-10.1	1.50 H	219	47.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.8 PK	88.2	-40.4	1.75 V	147	32.6	15.2
2	#13750.00	37.6 AV	68.2	-30.6	1.75 V	147	22.4	15.2
3	20625.00	53.9 PK	74.0	-20.1	1.65 V	46	57.2	-3.3
4	20625.00	43.9 AV	54.0	-10.1	1.65 V	46	47.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.8 PK	88.2	-38.4	2.93 H	114	34.4	15.4
2	#13990.00	39.2 AV	68.2	-29.0	2.93 H	114	23.8	15.4
3	20985.00	54.1 PK	74.0	-19.9	1.43 H	211	56.8	-2.7
4	20985.00	43.4 AV	54.0	-10.6	1.43 H	211	46.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.3 PK	88.2	-40.9	1.84 V	162	31.9	15.4
2	#13990.00	37.5 AV	68.2	-30.7	1.84 V	162	22.1	15.4
3	20985.00	54.1 PK	74.0	-19.9	1.73 V	40	56.8	-2.7
4	20985.00	44.4 AV	54.0	-9.6	1.73 V	40	47.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.9 PK	88.2	-38.3	2.93 H	110	34.6	15.3
2	#14230.00	39.3 AV	68.2	-28.9	2.93 H	110	24.0	15.3
3	21345.00	54.6 PK	74.0	-19.4	1.43 H	205	56.8	-2.2
4	21345.00	44.0 AV	54.0	-10.0	1.43 H	205	46.2	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.4 PK	88.2	-40.8	1.77 V	143	32.1	15.3
2	#14230.00	37.2 AV	68.2	-31.0	1.77 V	143	21.9	15.3
3	21345.00	53.9 PK	74.0	-20.1	1.67 V	40	56.1	-2.2
4	21345.00	44.3 AV	54.0	-9.7	1.67 V	40	46.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.7 PK	74.0	-24.3	2.99 H	107	37.5	12.2
2	11930.00	39.2 AV	54.0	-14.8	2.99 H	107	27.0	12.2
3	17895.00	54.3 PK	74.0	-19.7	1.42 H	217	32.0	22.3
4	17895.00	43.6 AV	54.0	-10.4	1.42 H	217	21.3	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.8 PK	74.0	-25.2	1.91 V	209	36.6	12.2
2	11930.00	38.0 AV	54.0	-16.0	1.91 V	209	25.8	12.2
3	17895.00	54.6 PK	74.0	-19.4	1.65 V	118	32.3	22.3
4	17895.00	42.1 AV	54.0	-11.9	1.65 V	118	19.8	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	50.2 PK	74.0	-23.8	2.89 H	109	37.8	12.4
2	12330.00	39.4 AV	54.0	-14.6	2.89 H	109	27.0	12.4
3	18495.00	54.2 PK	74.0	-19.8	1.42 H	232	58.9	-4.7
4	18495.00	43.5 AV	54.0	-10.5	1.42 H	232	48.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.3 PK	74.0	-25.7	1.90 V	198	35.9	12.4
2	12330.00	37.6 AV	54.0	-16.4	1.90 V	198	25.2	12.4
3	18495.00	55.0 PK	74.0	-19.0	1.63 V	116	59.7	-4.7
4	18495.00	42.3 AV	54.0	-11.7	1.63 V	116	47.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	49.7 PK	88.2	-38.5	2.96 H	95	36.6	13.1
2	#12810.00	39.1 AV	68.2	-29.1	2.96 H	95	26.0	13.1
3	19215.00	54.7 PK	74.0	-19.3	1.38 H	225	58.9	-4.2
4	19215.00	44.1 AV	54.0	-9.9	1.38 H	225	48.3	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.7 PK	88.2	-39.5	1.87 V	217	35.6	13.1
2	#12810.00	38.2 AV	68.2	-30.0	1.87 V	217	25.1	13.1
3	19215.00	54.8 PK	74.0	-19.2	1.61 V	127	59.0	-4.2
4	19215.00	42.1 AV	54.0	-11.9	1.61 V	127	46.3	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	50.3 PK	88.2	-37.9	2.91 H	100	36.9	13.4
2	#12890.00	39.5 AV	68.2	-28.7	2.91 H	100	26.1	13.4
3	19335.00	54.1 PK	74.0	-19.9	1.46 H	217	57.8	-3.7
4	19335.00	43.6 AV	54.0	-10.4	1.46 H	217	47.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.8 PK	88.2	-39.4	1.90 V	224	35.4	13.4
2	#12890.00	38.2 AV	68.2	-30.0	1.90 V	224	24.8	13.4
3	19335.00	54.6 PK	74.0	-19.4	1.59 V	109	58.3	-3.7
4	19335.00	42.0 AV	54.0	-12.0	1.59 V	109	45.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	49.9 PK	88.2	-38.3	2.94 H	109	36.6	13.3
2	#12970.00	39.4 AV	68.2	-28.8	2.94 H	109	26.1	13.3
3	19455.00	54.1 PK	74.0	-19.9	1.40 H	220	57.5	-3.4
4	19455.00	43.8 AV	54.0	-10.2	1.40 H	220	47.2	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	48.8 PK	88.2	-39.4	1.95 V	201	35.5	13.3
2	#12970.00	38.2 AV	68.2	-30.0	1.95 V	201	24.9	13.3
3	19455.00	54.2 PK	74.0	-19.8	1.63 V	107	57.6	-3.4
4	19455.00	41.9 AV	54.0	-12.1	1.63 V	107	45.3	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	50.6 PK	88.2	-37.6	2.94 H	95	37.3	13.3
2	#13050.00	39.9 AV	68.2	-28.3	2.94 H	95	26.6	13.3
3	19575.00	54.0 PK	74.0	-20.0	1.48 H	214	57.8	-3.8
4	19575.00	43.5 AV	54.0	-10.5	1.48 H	214	47.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	48.7 PK	88.2	-39.5	1.92 V	217	35.4	13.3
2	#13050.00	37.9 AV	68.2	-30.3	1.92 V	217	24.6	13.3
3	19575.00	54.5 PK	74.0	-19.5	1.69 V	121	58.3	-3.8
4	19575.00	41.8 AV	54.0	-12.2	1.69 V	121	45.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.6 PK	88.2	-39.6	2.98 H	66	35.2	13.4
2	#13130.00	37.5 AV	68.2	-30.7	2.98 H	66	24.1	13.4
3	19695.00	53.0 PK	74.0	-21.0	1.56 H	217	57.0	-4.0
4	19695.00	42.4 AV	54.0	-11.6	1.56 H	217	46.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	49.4 PK	88.2	-38.8	1.96 V	203	36.0	13.4
2	#13130.00	38.4 AV	68.2	-29.8	1.96 V	203	25.0	13.4
3	19695.00	54.3 PK	74.0	-19.7	1.61 V	125	58.3	-4.0
4	19695.00	41.8 AV	54.0	-12.2	1.61 V	125	45.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.6 PK	88.2	-39.6	2.98 H	66	34.2	14.4
2	#13450.00	37.6 AV	68.2	-30.6	2.98 H	66	23.2	14.4
3	20175.00	52.8 PK	74.0	-21.2	1.56 H	216	56.0	-3.2
4	20175.00	42.2 AV	54.0	-11.8	1.56 H	216	45.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.8 PK	88.2	-39.4	1.94 V	206	34.4	14.4
2	#13450.00	38.3 AV	68.2	-29.9	1.94 V	206	23.9	14.4
3	20175.00	54.5 PK	74.0	-19.5	1.68 V	115	57.7	-3.2
4	20175.00	41.8 AV	54.0	-12.2	1.68 V	115	45.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.6 PK	88.2	-39.6	3.00 H	50	33.3	15.3
2	#13690.00	37.2 AV	68.2	-31.0	3.00 H	50	21.9	15.3
3	20535.00	53.6 PK	74.0	-20.4	1.56 H	218	56.8	-3.2
4	20535.00	42.8 AV	54.0	-11.2	1.56 H	218	46.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	49.2 PK	88.2	-39.0	1.96 V	215	33.9	15.3
2	#13690.00	38.3 AV	68.2	-29.9	1.96 V	215	23.0	15.3
3	20535.00	54.6 PK	74.0	-19.4	1.61 V	111	57.8	-3.2
4	20535.00	42.2 AV	54.0	-11.8	1.61 V	111	45.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.3 PK	88.2	-39.9	2.96 H	68	33.2	15.1
2	#13770.00	37.1 AV	68.2	-31.1	2.96 H	68	22.0	15.1
3	20655.00	52.5 PK	74.0	-21.5	1.56 H	207	55.7	-3.2
4	20655.00	42.2 AV	54.0	-11.8	1.56 H	207	45.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.6 PK	88.2	-39.6	1.85 V	211	33.5	15.1
2	#13770.00	38.0 AV	68.2	-30.2	1.85 V	211	22.9	15.1
3	20655.00	54.7 PK	74.0	-19.3	1.62 V	125	57.9	-3.2
4	20655.00	42.1 AV	54.0	-11.9	1.62 V	125	45.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.5 PK	88.2	-39.7	2.94 H	81	33.0	15.5
2	#14010.00	37.4 AV	68.2	-30.8	2.94 H	81	21.9	15.5
3	21015.00	53.2 PK	74.0	-20.8	1.50 H	203	55.9	-2.7
4	21015.00	42.7 AV	54.0	-11.3	1.50 H	203	45.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.7 PK	88.2	-39.5	1.92 V	208	33.2	15.5
2	#14010.00	38.0 AV	68.2	-30.2	1.92 V	208	22.5	15.5
3	21015.00	54.9 PK	74.0	-19.1	1.62 V	131	57.6	-2.7
4	21015.00	42.6 AV	54.0	-11.4	1.62 V	131	45.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.7 PK	88.2	-39.5	2.94 H	70	33.5	15.2
2	#14170.00	37.8 AV	68.2	-30.4	2.94 H	70	22.6	15.2
3	21255.00	53.0 PK	74.0	-21.0	1.55 H	230	55.4	-2.4
4	21255.00	42.3 AV	54.0	-11.7	1.55 H	230	44.7	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.8 PK	88.2	-39.4	1.95 V	204	33.6	15.2
2	#14170.00	37.9 AV	68.2	-30.3	1.95 V	204	22.7	15.2
3	21255.00	54.9 PK	74.0	-19.1	1.65 V	133	57.3	-2.4
4	21255.00	42.5 AV	54.0	-11.5	1.65 V	133	44.9	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.8 PK	74.0	-26.2	2.98 H	109	35.6	12.2
2	11970.00	37.2 AV	54.0	-16.8	2.98 H	109	25.0	12.2
3	17955.00	53.8 PK	74.0	-20.2	1.70 H	210	30.6	23.2
4	17955.00	42.5 AV	54.0	-11.5	1.70 H	210	19.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	49.0 PK	74.0	-25.0	1.90 V	205	36.8	12.2
2	11970.00	38.1 AV	54.0	-15.9	1.90 V	205	25.9	12.2
3	17955.00	54.7 PK	74.0	-19.3	1.68 V	128	31.5	23.2
4	17955.00	42.0 AV	54.0	-12.0	1.68 V	128	18.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	47.9 PK	74.0	-26.1	2.96 H	99	35.4	12.5
2	12290.00	37.5 AV	54.0	-16.5	2.96 H	99	25.0	12.5
3	18435.00	54.0 PK	74.0	-20.0	1.74 H	226	58.9	-4.9
4	18435.00	42.6 AV	54.0	-11.4	1.74 H	226	47.5	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.4 PK	74.0	-25.6	1.85 V	224	35.9	12.5
2	12290.00	37.6 AV	54.0	-16.4	1.85 V	224	25.1	12.5
3	18435.00	54.1 PK	74.0	-19.9	1.63 V	107	59.0	-4.9
4	18435.00	41.8 AV	54.0	-12.2	1.63 V	107	46.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.6 PK	88.2	-39.6	3.01 H	121	35.5	13.1
2	#12770.00	37.7 AV	68.2	-30.5	3.01 H	121	24.6	13.1
3	19155.00	53.7 PK	74.0	-20.3	1.71 H	196	57.9	-4.2
4	19155.00	42.3 AV	54.0	-11.7	1.71 H	196	46.5	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.5 PK	88.2	-39.7	1.87 V	204	35.4	13.1
2	#12770.00	37.6 AV	68.2	-30.6	1.87 V	204	24.5	13.1
3	19155.00	54.3 PK	74.0	-19.7	1.59 V	108	58.5	-4.2
4	19155.00	41.7 AV	54.0	-12.3	1.59 V	108	45.9	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.5 PK	88.2	-40.7	2.95 H	105	34.1	13.4
2	#12930.00	37.1 AV	68.2	-31.1	2.95 H	105	23.7	13.4
3	19395.00	53.5 PK	74.0	-20.5	1.68 H	211	57.0	-3.5
4	19395.00	42.2 AV	54.0	-11.8	1.68 H	211	45.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	49.2 PK	88.2	-39.0	1.88 V	213	35.8	13.4
2	#12930.00	38.3 AV	68.2	-29.9	1.88 V	213	24.9	13.4
3	19395.00	55.3 PK	74.0	-18.7	1.68 V	109	58.8	-3.5
4	19395.00	42.5 AV	54.0	-11.5	1.68 V	109	46.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.2 PK	88.2	-40.0	3.02 H	113	34.7	13.5
2	#13090.00	37.3 AV	68.2	-30.9	3.02 H	113	23.8	13.5
3	19635.00	54.0 PK	74.0	-20.0	1.74 H	220	58.0	-4.0
4	19635.00	42.9 AV	54.0	-11.1	1.74 H	220	46.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.9 PK	88.2	-39.3	1.89 V	205	35.4	13.5
2	#13090.00	38.2 AV	68.2	-30.0	1.89 V	205	24.7	13.5
3	19635.00	55.0 PK	74.0	-19.0	1.61 V	120	59.0	-4.0
4	19635.00	42.3 AV	54.0	-11.7	1.61 V	120	46.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	47.9 PK	88.2	-40.3	2.98 H	107	33.7	14.2
2	#13410.00	37.1 AV	68.2	-31.1	2.98 H	107	22.9	14.2
3	20115.00	54.0 PK	74.0	-20.0	1.66 H	211	57.2	-3.2
4	20115.00	42.6 AV	54.0	-11.4	1.66 H	211	45.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.8 PK	88.2	-39.4	1.87 V	218	34.6	14.2
2	#13410.00	38.0 AV	68.2	-30.2	1.87 V	218	23.8	14.2
3	20115.00	54.9 PK	74.0	-19.1	1.68 V	125	58.1	-3.2
4	20115.00	42.6 AV	54.0	-11.4	1.68 V	125	45.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	47.3 PK	88.2	-40.9	3.00 H	110	32.2	15.1
2	#13730.00	36.7 AV	68.2	-31.5	3.00 H	110	21.6	15.1
3	20595.00	53.7 PK	74.0	-20.3	1.72 H	205	57.1	-3.4
4	20595.00	42.5 AV	54.0	-11.5	1.72 H	205	45.9	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.8 PK	88.2	-39.4	1.87 V	196	33.7	15.1
2	#13730.00	37.8 AV	68.2	-30.4	1.87 V	196	22.7	15.1
3	20595.00	54.5 PK	74.0	-19.5	1.61 V	109	57.9	-3.4
4	20595.00	42.2 AV	54.0	-11.8	1.61 V	109	45.6	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	47.5 PK	88.2	-40.7	2.94 H	119	32.6	14.9
2	#13890.00	36.9 AV	68.2	-31.3	2.94 H	119	22.0	14.9
3	20835.00	54.0 PK	74.0	-20.0	1.72 H	214	56.7	-2.7
4	20835.00	42.6 AV	54.0	-11.4	1.72 H	214	45.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.5 PK	88.2	-39.7	1.86 V	195	33.6	14.9
2	#13890.00	37.5 AV	68.2	-30.7	1.86 V	195	22.6	14.9
3	20835.00	55.0 PK	74.0	-19.0	1.61 V	128	57.7	-2.7
4	20835.00	42.3 AV	54.0	-11.7	1.61 V	128	45.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	47.6 PK	88.2	-40.6	2.97 H	109	32.2	15.4
2	#14050.00	37.0 AV	68.2	-31.2	2.97 H	109	21.6	15.4
3	21075.00	53.9 PK	74.0	-20.1	1.64 H	219	56.6	-2.7
4	21075.00	42.3 AV	54.0	-11.7	1.64 H	219	45.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.7 PK	88.2	-39.5	1.94 V	200	33.3	15.4
2	#14050.00	38.1 AV	68.2	-30.1	1.94 V	200	22.7	15.4
3	21075.00	54.2 PK	74.0	-19.8	1.63 V	120	56.9	-2.7
4	21075.00	41.9 AV	54.0	-12.1	1.63 V	120	44.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.7 PK	74.0	-26.3	3.04 H	113	35.2	12.5
2	12050.00	37.0 AV	54.0	-17.0	3.04 H	113	24.5	12.5
3	18075.00	53.6 PK	74.0	-20.4	1.71 H	219	58.1	-4.5
4	18075.00	42.1 AV	54.0	-11.9	1.71 H	219	46.6	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.9 PK	74.0	-25.1	1.92 V	209	36.4	12.5
2	12050.00	38.1 AV	54.0	-15.9	1.92 V	209	25.6	12.5
3	18075.00	54.1 PK	74.0	-19.9	1.69 V	114	58.6	-4.5
4	18075.00	41.9 AV	54.0	-12.1	1.69 V	114	46.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.2 PK	74.0	-25.8	2.97 H	121	35.8	12.4
2	12370.00	37.6 AV	54.0	-16.4	2.97 H	121	25.2	12.4
3	18555.00	53.1 PK	74.0	-20.9	1.73 H	207	57.6	-4.5
4	18555.00	42.0 AV	54.0	-12.0	1.73 H	207	46.5	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.1 PK	74.0	-25.9	1.88 V	212	35.7	12.4
2	12370.00	37.6 AV	54.0	-16.4	1.88 V	212	25.2	12.4
3	18555.00	54.8 PK	74.0	-19.2	1.63 V	131	59.3	-4.5
4	18555.00	42.3 AV	54.0	-11.7	1.63 V	131	46.8	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.0 PK	74.0	-26.0	2.98 H	101	35.0	13.0
2	12690.00	37.3 AV	54.0	-16.7	2.98 H	101	24.3	13.0
3	19035.00	53.9 PK	74.0	-20.1	1.69 H	198	58.0	-4.1
4	19035.00	42.8 AV	54.0	-11.2	1.69 H	198	46.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.5 PK	74.0	-25.5	1.90 V	207	35.5	13.0
2	12690.00	37.9 AV	54.0	-16.1	1.90 V	207	24.9	13.0
3	19035.00	54.3 PK	74.0	-19.7	1.65 V	127	58.4	-4.1
4	19035.00	41.6 AV	54.0	-12.4	1.65 V	127	45.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	47.5 PK	88.2	-40.7	2.93 H	118	34.3	13.2
2	#13010.00	37.0 AV	68.2	-31.2	2.93 H	118	23.8	13.2
3	19515.00	54.0 PK	74.0	-20.0	1.74 H	201	57.5	-3.5
4	19515.00	42.9 AV	54.0	-11.1	1.74 H	201	46.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.8 PK	88.2	-39.4	1.94 V	204	35.6	13.2
2	#13010.00	37.8 AV	68.2	-30.4	1.94 V	204	24.6	13.2
3	19515.00	54.6 PK	74.0	-19.4	1.62 V	105	58.1	-3.5
4	19515.00	42.0 AV	54.0	-12.0	1.62 V	105	45.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.9 PK	74.0	-26.1	2.97 H	122	34.1	13.8
2	13330.00	37.2 AV	54.0	-16.8	2.97 H	122	23.4	13.8
3	19995.00	53.5 PK	74.0	-20.5	1.75 H	211	57.3	-3.8
4	19995.00	42.5 AV	54.0	-11.5	1.75 H	211	46.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.6 PK	74.0	-25.4	1.95 V	202	34.8	13.8
2	13330.00	37.9 AV	54.0	-16.1	1.95 V	202	24.1	13.8
3	19995.00	55.0 PK	74.0	-19.0	1.66 V	106	58.8	-3.8
4	19995.00	42.3 AV	54.0	-11.7	1.66 V	106	46.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.2 PK	88.2	-40.0	2.95 H	119	33.1	15.1
2	#13650.00	37.5 AV	68.2	-30.7	2.95 H	119	22.4	15.1
3	20475.00	53.5 PK	74.0	-20.5	1.67 H	220	56.4	-2.9
4	20475.00	42.4 AV	54.0	-11.6	1.67 H	220	45.3	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.7 PK	88.2	-39.5	1.91 V	197	33.6	15.1
2	#13650.00	38.1 AV	68.2	-30.1	1.91 V	197	23.0	15.1
3	20475.00	54.6 PK	74.0	-19.4	1.62 V	111	57.5	-2.9
4	20475.00	41.9 AV	54.0	-12.1	1.62 V	111	44.8	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	47.9 PK	88.2	-40.3	2.93 H	96	32.6	15.3
2	#13970.00	37.3 AV	68.2	-30.9	2.93 H	96	22.0	15.3
3	20955.00	54.0 PK	74.0	-20.0	1.73 H	214	56.6	-2.6
4	20955.00	42.4 AV	54.0	-11.6	1.73 H	214	45.0	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.1 PK	88.2	-39.1	1.92 V	221	33.8	15.3
2	#13970.00	38.1 AV	68.2	-30.1	1.92 V	221	22.8	15.3
3	20955.00	54.9 PK	74.0	-19.1	1.64 V	123	57.5	-2.6
4	20955.00	42.1 AV	54.0	-11.9	1.64 V	123	44.7	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.9 PK	74.0	-25.1	3.06 H	65	36.7	12.2
2	11910.00	38.2 AV	54.0	-15.8	3.06 H	65	26.0	12.2
3	17865.00	51.5 PK	74.0	-22.5	1.67 H	189	29.7	21.8
4	17865.00	42.6 AV	54.0	-11.4	1.67 H	189	20.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.1 PK	74.0	-25.9	2.13 V	157	35.9	12.2
2	11910.00	38.3 AV	54.0	-15.7	2.13 V	157	26.1	12.2
3	17865.00	52.6 PK	74.0	-21.4	1.66 V	55	30.8	21.8
4	17865.00	41.4 AV	54.0	-12.6	1.66 V	55	19.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.5 PK	88.2	-38.7	3.09 H	65	36.4	13.1
2	#12830.00	38.7 AV	68.2	-29.5	3.09 H	65	25.6	13.1
3	19245.00	51.9 PK	74.0	-22.1	1.55 H	209	55.9	-4.0
4	19245.00	42.8 AV	54.0	-11.2	1.55 H	209	46.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.5 PK	88.2	-39.7	2.04 V	141	35.4	13.1
2	#12830.00	38.8 AV	68.2	-29.4	2.04 V	141	25.7	13.1
3	19245.00	51.9 PK	74.0	-22.1	1.60 V	46	55.9	-4.0
4	19245.00	40.9 AV	54.0	-13.1	1.60 V	46	44.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.6 PK	88.2	-38.6	3.09 H	48	36.3	13.3
2	#12870.00	38.8 AV	68.2	-29.4	3.09 H	48	25.5	13.3
3	19305.00	51.5 PK	74.0	-22.5	1.57 H	192	55.4	-3.9
4	19305.00	42.6 AV	54.0	-11.4	1.57 H	192	46.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.9 PK	88.2	-40.3	2.13 V	140	34.6	13.3
2	#12870.00	38.3 AV	68.2	-29.9	2.13 V	140	25.0	13.3
3	19305.00	52.4 PK	74.0	-21.6	1.71 V	55	56.3	-3.9
4	19305.00	41.1 AV	54.0	-12.9	1.71 V	55	45.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.9 PK	88.2	-38.3	3.07 H	70	36.6	13.3
2	#13030.00	38.7 AV	68.2	-29.5	3.07 H	70	25.4	13.3
3	19545.00	51.5 PK	74.0	-22.5	1.66 H	200	55.2	-3.7
4	19545.00	42.9 AV	54.0	-11.1	1.66 H	200	46.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.6 PK	88.2	-39.6	2.14 V	143	35.3	13.3
2	#13030.00	38.6 AV	68.2	-29.6	2.14 V	143	25.3	13.3
3	19545.00	52.1 PK	74.0	-21.9	1.72 V	44	55.8	-3.7
4	19545.00	41.2 AV	54.0	-12.8	1.72 V	44	44.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.9 PK	88.2	-39.3	3.04 H	58	35.6	13.3
2	#13070.00	38.2 AV	68.2	-30.0	3.04 H	58	24.9	13.3
3	19605.00	51.0 PK	74.0	-23.0	1.57 H	201	55.0	-4.0
4	19605.00	42.3 AV	54.0	-11.7	1.57 H	201	46.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.5 PK	88.2	-39.7	2.14 V	147	35.2	13.3
2	#13070.00	38.8 AV	68.2	-29.4	2.14 V	147	25.5	13.3
3	19605.00	52.7 PK	74.0	-21.3	1.67 V	38	56.7	-4.0
4	19605.00	41.5 AV	54.0	-12.5	1.67 V	38	45.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.5 PK	88.2	-38.7	3.10 H	48	34.3	15.2
2	#13750.00	38.8 AV	68.2	-29.4	3.10 H	48	23.6	15.2
3	20625.00	51.5 PK	74.0	-22.5	1.64 H	187	54.8	-3.3
4	20625.00	43.0 AV	54.0	-11.0	1.64 H	187	46.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.5 PK	88.2	-39.7	2.14 V	135	33.3	15.2
2	#13750.00	38.8 AV	68.2	-29.4	2.14 V	135	23.6	15.2
3	20625.00	52.0 PK	74.0	-22.0	1.62 V	43	55.3	-3.3
4	20625.00	41.1 AV	54.0	-12.9	1.62 V	43	44.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.8 PK	88.2	-38.4	3.02 H	61	34.4	15.4
2	#13990.00	38.7 AV	68.2	-29.5	3.02 H	61	23.3	15.4
3	20985.00	51.5 PK	74.0	-22.5	1.61 H	183	54.2	-2.7
4	20985.00	42.9 AV	54.0	-11.1	1.61 H	183	45.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.6 PK	88.2	-39.6	2.06 V	149	33.2	15.4
2	#13990.00	38.7 AV	68.2	-29.5	2.06 V	149	23.3	15.4
3	20985.00	52.6 PK	74.0	-21.4	1.61 V	45	55.3	-2.7
4	20985.00	41.4 AV	54.0	-12.6	1.61 V	45	44.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.9 PK	88.2	-39.3	3.11 H	74	33.6	15.3
2	#14230.00	38.2 AV	68.2	-30.0	3.11 H	74	22.9	15.3
3	21345.00	51.2 PK	74.0	-22.8	1.66 H	203	53.4	-2.2
4	21345.00	42.6 AV	54.0	-11.4	1.66 H	203	44.8	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.4 PK	88.2	-40.8	2.08 V	152	32.1	15.3
2	#14230.00	37.9 AV	68.2	-30.3	2.08 V	152	22.6	15.3
3	21345.00	52.4 PK	74.0	-21.6	1.61 V	56	54.6	-2.2
4	21345.00	41.6 AV	54.0	-12.4	1.61 V	56	43.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.6 PK	74.0	-24.4	3.11 H	70	37.4	12.2
2	11910.00	38.6 AV	54.0	-15.4	3.11 H	70	26.4	12.2
3	17865.00	51.3 PK	74.0	-22.7	1.61 H	202	29.5	21.8
4	17865.00	42.7 AV	54.0	-11.3	1.61 H	202	20.9	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	2.03 V	131	35.7	12.2
2	11910.00	38.2 AV	54.0	-15.8	2.03 V	131	26.0	12.2
3	17865.00	52.7 PK	74.0	-21.3	1.67 V	29	30.9	21.8
4	17865.00	41.7 AV	54.0	-12.3	1.67 V	29	19.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.8 PK	88.2	-38.4	3.06 H	68	36.7	13.1
2	#12830.00	38.8 AV	68.2	-29.4	3.06 H	68	25.7	13.1
3	19245.00	51.5 PK	74.0	-22.5	1.66 H	191	55.5	-4.0
4	19245.00	43.0 AV	54.0	-11.0	1.66 H	191	47.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.4 PK	88.2	-39.8	2.12 V	146	35.3	13.1
2	#12830.00	38.8 AV	68.2	-29.4	2.12 V	146	25.7	13.1
3	19245.00	52.1 PK	74.0	-21.9	1.61 V	56	56.1	-4.0
4	19245.00	41.1 AV	54.0	-12.9	1.61 V	56	45.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.9 PK	88.2	-39.3	3.05 H	49	35.6	13.3
2	#12870.00	38.2 AV	68.2	-30.0	3.05 H	49	24.9	13.3
3	19305.00	51.5 PK	74.0	-22.5	1.65 H	188	55.4	-3.9
4	19305.00	43.0 AV	54.0	-11.0	1.65 H	188	46.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.1 PK	88.2	-40.1	2.10 V	157	34.8	13.3
2	#12870.00	38.6 AV	68.2	-29.6	2.10 V	157	25.3	13.3
3	19305.00	52.8 PK	74.0	-21.2	1.62 V	54	56.7	-3.9
4	19305.00	41.6 AV	54.0	-12.4	1.62 V	54	45.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.3 PK	88.2	-38.9	3.11 H	57	36.0	13.3
2	#13030.00	38.5 AV	68.2	-29.7	3.11 H	57	25.2	13.3
3	19545.00	51.1 PK	74.0	-22.9	1.55 H	203	54.8	-3.7
4	19545.00	42.5 AV	54.0	-11.5	1.55 H	203	46.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.5 PK	88.2	-39.7	2.05 V	131	35.2	13.3
2	#13030.00	38.7 AV	68.2	-29.5	2.05 V	131	25.4	13.3
3	19545.00	52.4 PK	74.0	-21.6	1.65 V	55	56.1	-3.7
4	19545.00	41.4 AV	54.0	-12.6	1.65 V	55	45.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.7 PK	88.2	-38.5	3.04 H	78	36.4	13.3
2	#13070.00	38.7 AV	68.2	-29.5	3.04 H	78	25.4	13.3
3	19605.00	51.2 PK	74.0	-22.8	1.62 H	207	55.2	-4.0
4	19605.00	42.3 AV	54.0	-11.7	1.62 H	207	46.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	2.13 V	134	35.0	13.3
2	#13070.00	38.5 AV	68.2	-29.7	2.13 V	134	25.2	13.3
3	19605.00	52.7 PK	74.0	-21.3	1.68 V	35	56.7	-4.0
4	19605.00	41.7 AV	54.0	-12.3	1.68 V	35	45.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	50.0 PK	88.2	-38.2	3.10 H	53	34.8	15.2
2	#13750.00	39.0 AV	68.2	-29.2	3.10 H	53	23.8	15.2
3	20625.00	52.1 PK	74.0	-21.9	1.59 H	211	55.4	-3.3
4	20625.00	43.0 AV	54.0	-11.0	1.59 H	211	46.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.3 PK	88.2	-39.9	2.13 V	135	33.1	15.2
2	#13750.00	38.8 AV	68.2	-29.4	2.13 V	135	23.6	15.2
3	20625.00	52.2 PK	74.0	-21.8	1.60 V	29	55.5	-3.3
4	20625.00	41.2 AV	54.0	-12.8	1.60 V	29	44.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.5 PK	88.2	-38.7	3.01 H	78	34.1	15.4
2	#13990.00	38.8 AV	68.2	-29.4	3.01 H	78	23.4	15.4
3	20985.00	51.5 PK	74.0	-22.5	1.58 H	211	54.2	-2.7
4	20985.00	43.0 AV	54.0	-11.0	1.58 H	211	45.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.3 PK	88.2	-39.9	2.05 V	145	32.9	15.4
2	#13990.00	38.7 AV	68.2	-29.5	2.05 V	145	23.3	15.4
3	20985.00	52.3 PK	74.0	-21.7	1.68 V	59	55.0	-2.7
4	20985.00	41.4 AV	54.0	-12.6	1.68 V	59	44.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.6 PK	88.2	-38.6	3.07 H	79	34.3	15.3
2	#14230.00	38.8 AV	68.2	-29.4	3.07 H	79	23.5	15.3
3	21345.00	51.1 PK	74.0	-22.9	1.57 H	211	53.3	-2.2
4	21345.00	42.3 AV	54.0	-11.7	1.57 H	211	44.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.3 PK	88.2	-39.9	2.14 V	155	33.0	15.3
2	#14230.00	38.8 AV	68.2	-29.4	2.14 V	155	23.5	15.3
3	21345.00	52.5 PK	74.0	-21.5	1.70 V	30	54.7	-2.2
4	21345.00	41.5 AV	54.0	-12.5	1.70 V	30	43.7	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	50.1 PK	74.0	-23.9	3.06 H	56	37.9	12.2
2	11910.00	39.0 AV	54.0	-15.0	3.06 H	56	26.8	12.2
3	17865.00	51.3 PK	74.0	-22.7	1.56 H	199	29.5	21.8
4	17865.00	42.4 AV	54.0	-11.6	1.56 H	199	20.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.2 PK	74.0	-25.8	2.02 V	132	36.0	12.2
2	11910.00	38.2 AV	54.0	-15.8	2.02 V	132	26.0	12.2
3	17865.00	52.1 PK	74.0	-21.9	1.68 V	53	30.3	21.8
4	17865.00	41.3 AV	54.0	-12.7	1.68 V	53	19.5	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.9 PK	88.2	-38.3	3.08 H	63	36.8	13.1
2	#12830.00	39.1 AV	68.2	-29.1	3.08 H	63	26.0	13.1
3	19245.00	51.4 PK	74.0	-22.6	1.66 H	208	55.4	-4.0
4	19245.00	42.4 AV	54.0	-11.6	1.66 H	208	46.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.5 PK	88.2	-39.7	2.07 V	145	35.4	13.1
2	#12830.00	38.7 AV	68.2	-29.5	2.07 V	145	25.6	13.1
3	19245.00	52.2 PK	74.0	-21.8	1.67 V	46	56.2	-4.0
4	19245.00	40.8 AV	54.0	-13.2	1.67 V	46	44.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.9 PK	88.2	-38.3	3.01 H	66	36.6	13.3
2	#12870.00	38.8 AV	68.2	-29.4	3.01 H	66	25.5	13.3
3	19305.00	51.6 PK	74.0	-22.4	1.59 H	196	55.5	-3.9
4	19305.00	43.0 AV	54.0	-11.0	1.59 H	196	46.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.6 PK	88.2	-40.6	2.03 V	160	34.3	13.3
2	#12870.00	38.2 AV	68.2	-30.0	2.03 V	160	24.9	13.3
3	19305.00	52.6 PK	74.0	-21.4	1.69 V	59	56.5	-3.9
4	19305.00	41.5 AV	54.0	-12.5	1.69 V	59	45.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.9 PK	88.2	-39.3	3.03 H	60	35.6	13.3
2	#13030.00	38.3 AV	68.2	-29.9	3.03 H	60	25.0	13.3
3	19545.00	51.2 PK	74.0	-22.8	1.59 H	206	54.9	-3.7
4	19545.00	42.6 AV	54.0	-11.4	1.59 H	206	46.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.2 PK	88.2	-40.0	2.08 V	137	34.9	13.3
2	#13030.00	38.7 AV	68.2	-29.5	2.08 V	137	25.4	13.3
3	19545.00	53.0 PK	74.0	-21.0	1.68 V	50	56.7	-3.7
4	19545.00	41.6 AV	54.0	-12.4	1.68 V	50	45.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.3 PK	88.2	-38.9	3.00 H	74	36.0	13.3
2	#13070.00	38.2 AV	68.2	-30.0	3.00 H	74	24.9	13.3
3	19605.00	51.7 PK	74.0	-22.3	1.60 H	181	55.7	-4.0
4	19605.00	42.8 AV	54.0	-11.2	1.60 H	181	46.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	2.08 V	134	35.0	13.3
2	#13070.00	38.4 AV	68.2	-29.8	2.08 V	134	25.1	13.3
3	19605.00	52.0 PK	74.0	-22.0	1.63 V	55	56.0	-4.0
4	19605.00	40.8 AV	54.0	-13.2	1.63 V	55	44.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.6 PK	88.2	-38.6	3.10 H	53	34.4	15.2
2	#13750.00	38.7 AV	68.2	-29.5	3.10 H	53	23.5	15.2
3	20625.00	50.8 PK	74.0	-23.2	1.67 H	181	54.1	-3.3
4	20625.00	42.2 AV	54.0	-11.8	1.67 H	181	45.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.3 PK	88.2	-40.9	2.10 V	147	32.1	15.2
2	#13750.00	37.9 AV	68.2	-30.3	2.10 V	147	22.7	15.2
3	20625.00	51.8 PK	74.0	-22.2	1.67 V	57	55.1	-3.3
4	20625.00	40.9 AV	54.0	-13.1	1.67 V	57	44.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.1 PK	88.2	-39.1	3.11 H	51	33.7	15.4
2	#13990.00	38.4 AV	68.2	-29.8	3.11 H	51	23.0	15.4
3	20985.00	51.3 PK	74.0	-22.7	1.58 H	196	54.0	-2.7
4	20985.00	42.5 AV	54.0	-11.5	1.58 H	196	45.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.8 PK	88.2	-40.4	2.09 V	137	32.4	15.4
2	#13990.00	38.3 AV	68.2	-29.9	2.09 V	137	22.9	15.4
3	20985.00	52.3 PK	74.0	-21.7	1.71 V	47	55.0	-2.7
4	20985.00	41.3 AV	54.0	-12.7	1.71 V	47	44.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.8 PK	88.2	-38.4	3.12 H	74	34.5	15.3
2	#14230.00	38.9 AV	68.2	-29.3	3.12 H	74	23.6	15.3
3	21345.00	51.4 PK	74.0	-22.6	1.59 H	182	53.6	-2.2
4	21345.00	42.7 AV	54.0	-11.3	1.59 H	182	44.9	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.8 PK	88.2	-40.4	2.03 V	147	32.5	15.3
2	#14230.00	38.0 AV	68.2	-30.2	2.03 V	147	22.7	15.3
3	21345.00	52.3 PK	74.0	-21.7	1.72 V	29	54.5	-2.2
4	21345.00	41.1 AV	54.0	-12.9	1.72 V	29	43.3	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.8 PK	74.0	-24.2	3.06 H	57	37.6	12.2
2	11910.00	38.9 AV	54.0	-15.1	3.06 H	57	26.7	12.2
3	17865.00	51.3 PK	74.0	-22.7	1.64 H	206	29.5	21.8
4	17865.00	42.4 AV	54.0	-11.6	1.64 H	206	20.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.8 PK	74.0	-26.2	2.07 V	143	35.6	12.2
2	11910.00	38.2 AV	54.0	-15.8	2.07 V	143	26.0	12.2
3	17865.00	52.4 PK	74.0	-21.6	1.69 V	43	30.6	21.8
4	17865.00	41.5 AV	54.0	-12.5	1.69 V	43	19.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.2 PK	88.2	-39.0	3.08 H	50	36.1	13.1
2	#12830.00	38.2 AV	68.2	-30.0	3.08 H	50	25.1	13.1
3	19245.00	51.2 PK	74.0	-22.8	1.65 H	211	55.2	-4.0
4	19245.00	42.2 AV	54.0	-11.8	1.65 H	211	46.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.8 PK	88.2	-40.4	2.14 V	150	34.7	13.1
2	#12830.00	38.2 AV	68.2	-30.0	2.14 V	150	25.1	13.1
3	19245.00	52.5 PK	74.0	-21.5	1.61 V	54	56.5	-4.0
4	19245.00	41.2 AV	54.0	-12.8	1.61 V	54	45.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.0 PK	88.2	-39.2	3.00 H	51	35.7	13.3
2	#12870.00	38.3 AV	68.2	-29.9	3.00 H	51	25.0	13.3
3	19305.00	51.5 PK	74.0	-22.5	1.58 H	210	55.4	-3.9
4	19305.00	42.8 AV	54.0	-11.2	1.58 H	210	46.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	2.07 V	157	35.2	13.3
2	#12870.00	38.6 AV	68.2	-29.6	2.07 V	157	25.3	13.3
3	19305.00	52.6 PK	74.0	-21.4	1.70 V	43	56.5	-3.9
4	19305.00	41.7 AV	54.0	-12.3	1.70 V	43	45.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.5 PK	88.2	-38.7	3.04 H	59	36.2	13.3
2	#13030.00	38.5 AV	68.2	-29.7	3.04 H	59	25.2	13.3
3	19545.00	52.2 PK	74.0	-21.8	1.62 H	204	55.9	-3.7
4	19545.00	43.1 AV	54.0	-10.9	1.62 H	204	46.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.5 PK	88.2	-39.7	2.14 V	144	35.2	13.3
2	#13030.00	38.7 AV	68.2	-29.5	2.14 V	144	25.4	13.3
3	19545.00	52.5 PK	74.0	-21.5	1.67 V	43	56.2	-3.7
4	19545.00	41.7 AV	54.0	-12.3	1.67 V	43	45.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.3 PK	88.2	-38.9	3.01 H	60	36.0	13.3
2	#13070.00	38.7 AV	68.2	-29.5	3.01 H	60	25.4	13.3
3	19605.00	51.4 PK	74.0	-22.6	1.63 H	206	55.4	-4.0
4	19605.00	42.3 AV	54.0	-11.7	1.63 H	206	46.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.5 PK	88.2	-39.7	2.13 V	150	35.2	13.3
2	#13070.00	38.8 AV	68.2	-29.4	2.13 V	150	25.5	13.3
3	19605.00	52.8 PK	74.0	-21.2	1.61 V	45	56.8	-4.0
4	19605.00	41.8 AV	54.0	-12.2	1.61 V	45	45.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	50.0 PK	88.2	-38.2	3.10 H	50	34.8	15.2
2	#13750.00	39.0 AV	68.2	-29.2	3.10 H	50	23.8	15.2
3	20625.00	51.5 PK	74.0	-22.5	1.57 H	199	54.8	-3.3
4	20625.00	42.9 AV	54.0	-11.1	1.57 H	199	46.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.9 PK	88.2	-40.3	2.06 V	137	32.7	15.2
2	#13750.00	37.9 AV	68.2	-30.3	2.06 V	137	22.7	15.2
3	20625.00	51.9 PK	74.0	-22.1	1.62 V	50	55.2	-3.3
4	20625.00	40.9 AV	54.0	-13.1	1.62 V	50	44.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.3 PK	88.2	-38.9	3.08 H	57	33.9	15.4
2	#13990.00	38.2 AV	68.2	-30.0	3.08 H	57	22.8	15.4
3	20985.00	51.9 PK	74.0	-22.1	1.67 H	184	54.6	-2.7
4	20985.00	43.1 AV	54.0	-10.9	1.67 H	184	45.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.2 PK	88.2	-40.0	2.08 V	132	32.8	15.4
2	#13990.00	38.5 AV	68.2	-29.7	2.08 V	132	23.1	15.4
3	20985.00	52.3 PK	74.0	-21.7	1.61 V	40	55.0	-2.7
4	20985.00	41.1 AV	54.0	-12.9	1.61 V	40	43.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.2 PK	88.2	-39.0	3.11 H	56	33.9	15.3
2	#14230.00	38.5 AV	68.2	-29.7	3.11 H	56	23.2	15.3
3	21345.00	51.8 PK	74.0	-22.2	1.62 H	198	54.0	-2.2
4	21345.00	43.1 AV	54.0	-10.9	1.62 H	198	45.3	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	2.09 V	141	33.5	15.3
2	#14230.00	38.8 AV	68.2	-29.4	2.09 V	141	23.5	15.3
3	21345.00	53.1 PK	74.0	-20.9	1.63 V	32	55.3	-2.2
4	21345.00	41.8 AV	54.0	-12.2	1.63 V	32	44.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	50.1 PK	74.0	-23.9	3.11 H	68	37.9	12.2
2	11910.00	39.0 AV	54.0	-15.0	3.11 H	68	26.8	12.2
3	17865.00	52.2 PK	74.0	-21.8	1.61 H	193	30.4	21.8
4	17865.00	43.1 AV	54.0	-10.9	1.61 H	193	21.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.1 PK	74.0	-25.9	2.07 V	143	35.9	12.2
2	11910.00	38.4 AV	54.0	-15.6	2.07 V	143	26.2	12.2
3	17865.00	52.5 PK	74.0	-21.5	1.68 V	54	30.7	21.8
4	17865.00	41.6 AV	54.0	-12.4	1.68 V	54	19.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.2 PK	88.2	-39.0	3.03 H	67	36.1	13.1
2	#12830.00	38.6 AV	68.2	-29.6	3.03 H	67	25.5	13.1
3	19245.00	51.1 PK	74.0	-22.9	1.61 H	207	55.1	-4.0
4	19245.00	42.1 AV	54.0	-11.9	1.61 H	207	46.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.2 PK	88.2	-40.0	2.12 V	159	35.1	13.1
2	#12830.00	38.7 AV	68.2	-29.5	2.12 V	159	25.6	13.1
3	19245.00	52.2 PK	74.0	-21.8	1.63 V	37	56.2	-4.0
4	19245.00	40.9 AV	54.0	-13.1	1.63 V	37	44.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.9 PK	88.2	-39.3	3.10 H	52	35.6	13.3
2	#12870.00	38.3 AV	68.2	-29.9	3.10 H	52	25.0	13.3
3	19305.00	51.1 PK	74.0	-22.9	1.60 H	194	55.0	-3.9
4	19305.00	42.3 AV	54.0	-11.7	1.60 H	194	46.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.9 PK	88.2	-40.3	2.09 V	156	34.6	13.3
2	#12870.00	38.2 AV	68.2	-30.0	2.09 V	156	24.9	13.3
3	19305.00	52.6 PK	74.0	-21.4	1.67 V	53	56.5	-3.9
4	19305.00	41.7 AV	54.0	-12.3	1.67 V	53	45.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.9 PK	88.2	-38.3	3.11 H	64	36.6	13.3
2	#13030.00	39.1 AV	68.2	-29.1	3.11 H	64	25.8	13.3
3	19545.00	51.3 PK	74.0	-22.7	1.62 H	181	55.0	-3.7
4	19545.00	42.3 AV	54.0	-11.7	1.62 H	181	46.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.1 PK	88.2	-40.1	2.06 V	141	34.8	13.3
2	#13030.00	38.4 AV	68.2	-29.8	2.06 V	141	25.1	13.3
3	19545.00	52.9 PK	74.0	-21.1	1.71 V	50	56.6	-3.7
4	19545.00	41.6 AV	54.0	-12.4	1.71 V	50	45.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.3 PK	88.2	-38.9	3.06 H	53	36.0	13.3
2	#13070.00	38.3 AV	68.2	-29.9	3.06 H	53	25.0	13.3
3	19605.00	51.5 PK	74.0	-22.5	1.67 H	202	55.5	-4.0
4	19605.00	42.4 AV	54.0	-11.6	1.67 H	202	46.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	2.06 V	130	34.6	13.3
2	#13070.00	38.2 AV	68.2	-30.0	2.06 V	130	24.9	13.3
3	19605.00	52.7 PK	74.0	-21.3	1.70 V	32	56.7	-4.0
4	19605.00	41.6 AV	54.0	-12.4	1.70 V	32	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.3 PK	88.2	-38.9	3.02 H	66	34.1	15.2
2	#13750.00	38.6 AV	68.2	-29.6	3.02 H	66	23.4	15.2
3	20625.00	52.0 PK	74.0	-22.0	1.65 H	193	55.3	-3.3
4	20625.00	43.1 AV	54.0	-10.9	1.65 H	193	46.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.8 PK	88.2	-40.4	2.06 V	154	32.6	15.2
2	#13750.00	38.0 AV	68.2	-30.2	2.06 V	154	22.8	15.2
3	20625.00	52.9 PK	74.0	-21.1	1.65 V	54	56.2	-3.3
4	20625.00	41.6 AV	54.0	-12.4	1.65 V	54	44.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.3 PK	88.2	-38.9	3.04 H	59	33.9	15.4
2	#13990.00	38.4 AV	68.2	-29.8	3.04 H	59	23.0	15.4
3	20985.00	50.8 PK	74.0	-23.2	1.62 H	184	53.5	-2.7
4	20985.00	42.2 AV	54.0	-11.8	1.62 H	184	44.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.5 PK	88.2	-39.7	2.13 V	150	33.1	15.4
2	#13990.00	38.6 AV	68.2	-29.6	2.13 V	150	23.2	15.4
3	20985.00	52.1 PK	74.0	-21.9	1.71 V	57	54.8	-2.7
4	20985.00	41.2 AV	54.0	-12.8	1.71 V	57	43.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.8 PK	88.2	-38.4	3.07 H	75	34.5	15.3
2	#14230.00	38.6 AV	68.2	-29.6	3.07 H	75	23.3	15.3
3	21345.00	51.4 PK	74.0	-22.6	1.65 H	201	53.6	-2.2
4	21345.00	42.6 AV	54.0	-11.4	1.65 H	201	44.8	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.7 PK	88.2	-40.5	2.09 V	143	32.4	15.3
2	#14230.00	38.2 AV	68.2	-30.0	2.09 V	143	22.9	15.3
3	21345.00	52.2 PK	74.0	-21.8	1.62 V	55	54.4	-2.2
4	21345.00	41.1 AV	54.0	-12.9	1.62 V	55	43.3	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	49.8 PK	74.0	-24.2	3.09 H	53	37.6	12.2
2	11970.00	38.7 AV	54.0	-15.3	3.09 H	53	26.5	12.2
3	17955.00	51.6 PK	74.0	-22.4	1.55 H	199	28.4	23.2
4	17955.00	43.0 AV	54.0	-11.0	1.55 H	199	19.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.0 PK	74.0	-26.0	2.07 V	158	35.8	12.2
2	11970.00	38.0 AV	54.0	-16.0	2.07 V	158	25.8	12.2
3	17955.00	53.1 PK	74.0	-20.9	1.61 V	59	29.9	23.2
4	17955.00	41.8 AV	54.0	-12.2	1.61 V	59	18.6	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.7 PK	88.2	-38.5	3.10 H	63	36.6	13.1
2	#12770.00	38.6 AV	68.2	-29.6	3.10 H	63	25.5	13.1
3	19155.00	52.0 PK	74.0	-22.0	1.58 H	187	56.2	-4.2
4	19155.00	43.0 AV	54.0	-11.0	1.58 H	187	47.2	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.5 PK	88.2	-39.7	2.06 V	129	35.4	13.1
2	#12770.00	38.6 AV	68.2	-29.6	2.06 V	129	25.5	13.1
3	19155.00	53.1 PK	74.0	-20.9	1.64 V	51	57.3	-4.2
4	19155.00	41.7 AV	54.0	-12.3	1.64 V	51	45.9	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	49.2 PK	88.2	-39.0	3.06 H	49	35.8	13.4
2	#12930.00	38.1 AV	68.2	-30.1	3.06 H	49	24.7	13.4
3	19395.00	50.9 PK	74.0	-23.1	1.61 H	187	54.4	-3.5
4	19395.00	42.2 AV	54.0	-11.8	1.61 H	187	45.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.0 PK	88.2	-40.2	2.09 V	153	34.6	13.4
2	#12930.00	38.2 AV	68.2	-30.0	2.09 V	153	24.8	13.4
3	19395.00	52.5 PK	74.0	-21.5	1.71 V	42	56.0	-3.5
4	19395.00	41.6 AV	54.0	-12.4	1.71 V	42	45.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	49.2 PK	88.2	-39.0	3.07 H	73	35.7	13.5
2	#13090.00	38.2 AV	68.2	-30.0	3.07 H	73	24.7	13.5
3	19635.00	51.8 PK	74.0	-22.2	1.56 H	210	55.8	-4.0
4	19635.00	43.1 AV	54.0	-10.9	1.56 H	210	47.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.0 PK	88.2	-40.2	2.14 V	140	34.5	13.5
2	#13090.00	38.3 AV	68.2	-29.9	2.14 V	140	24.8	13.5
3	19635.00	52.1 PK	74.0	-21.9	1.62 V	53	56.1	-4.0
4	19635.00	41.0 AV	54.0	-13.0	1.62 V	53	45.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	49.4 PK	88.2	-38.8	3.10 H	49	34.3	15.1
2	#13730.00	38.5 AV	68.2	-29.7	3.10 H	49	23.4	15.1
3	20595.00	51.6 PK	74.0	-22.4	1.62 H	194	55.0	-3.4
4	20595.00	42.9 AV	54.0	-11.1	1.62 H	194	46.3	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.1 PK	88.2	-40.1	2.10 V	138	33.0	15.1
2	#13730.00	38.5 AV	68.2	-29.7	2.10 V	138	23.4	15.1
3	20595.00	52.6 PK	74.0	-21.4	1.66 V	55	56.0	-3.4
4	20595.00	41.8 AV	54.0	-12.2	1.66 V	55	45.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	49.5 PK	88.2	-38.7	3.06 H	77	34.6	14.9
2	#13890.00	38.6 AV	68.2	-29.6	3.06 H	77	23.7	14.9
3	20835.00	51.9 PK	74.0	-22.1	1.55 H	187	54.6	-2.7
4	20835.00	43.0 AV	54.0	-11.0	1.55 H	187	45.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.1 PK	88.2	-40.1	2.10 V	133	33.2	14.9
2	#13890.00	38.2 AV	68.2	-30.0	2.10 V	133	23.3	14.9
3	20835.00	52.0 PK	74.0	-22.0	1.63 V	45	54.7	-2.7
4	20835.00	41.2 AV	54.0	-12.8	1.63 V	45	43.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	49.6 PK	88.2	-38.6	3.04 H	52	34.2	15.4
2	#14050.00	38.7 AV	68.2	-29.5	3.04 H	52	23.3	15.4
3	21075.00	51.4 PK	74.0	-22.6	1.64 H	183	54.1	-2.7
4	21075.00	42.8 AV	54.0	-11.2	1.64 H	183	45.5	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.0 PK	88.2	-40.2	2.04 V	154	32.6	15.4
2	#14050.00	38.1 AV	68.2	-30.1	2.04 V	154	22.7	15.4
3	21075.00	52.3 PK	74.0	-21.7	1.61 V	59	55.0	-2.7
4	21075.00	41.0 AV	54.0	-13.0	1.61 V	59	43.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.6 PK	74.0	-24.4	3.11 H	63	37.1	12.5
2	12050.00	38.6 AV	54.0	-15.4	3.11 H	63	26.1	12.5
3	18075.00	51.8 PK	74.0	-22.2	1.66 H	187	56.3	-4.5
4	18075.00	42.7 AV	54.0	-11.3	1.66 H	187	47.2	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.6 PK	74.0	-25.4	2.03 V	133	36.1	12.5
2	12050.00	38.7 AV	54.0	-15.3	2.03 V	133	26.2	12.5
3	18075.00	52.4 PK	74.0	-21.6	1.64 V	58	56.9	-4.5
4	18075.00	41.1 AV	54.0	-12.9	1.64 V	58	45.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.8 PK	74.0	-24.2	3.09 H	71	36.8	13.0
2	12690.00	38.6 AV	54.0	-15.4	3.09 H	71	25.6	13.0
3	19035.00	51.8 PK	74.0	-22.2	1.63 H	200	55.9	-4.1
4	19035.00	42.8 AV	54.0	-11.2	1.63 H	200	46.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.1 PK	74.0	-25.9	2.12 V	146	35.1	13.0
2	12690.00	38.5 AV	54.0	-15.5	2.12 V	146	25.5	13.0
3	19035.00	52.9 PK	74.0	-21.1	1.63 V	42	57.0	-4.1
4	19035.00	41.7 AV	54.0	-12.3	1.63 V	42	45.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	49.7 PK	88.2	-38.5	3.10 H	53	36.5	13.2
2	#13010.00	39.0 AV	68.2	-29.2	3.10 H	53	25.8	13.2
3	19515.00	51.5 PK	74.0	-22.5	1.64 H	206	55.0	-3.5
4	19515.00	42.5 AV	54.0	-11.5	1.64 H	206	46.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.1 PK	88.2	-40.1	2.02 V	135	34.9	13.2
2	#13010.00	38.4 AV	68.2	-29.8	2.02 V	135	25.2	13.2
3	19515.00	52.0 PK	74.0	-22.0	1.62 V	31	55.5	-3.5
4	19515.00	41.1 AV	54.0	-12.9	1.62 V	31	44.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.5 PK	74.0	-24.5	3.12 H	68	35.7	13.8
2	13330.00	38.4 AV	54.0	-15.6	3.12 H	68	24.6	13.8
3	19995.00	51.5 PK	74.0	-22.5	1.62 H	189	55.3	-3.8
4	19995.00	42.5 AV	54.0	-11.5	1.62 H	189	46.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.4 PK	74.0	-25.6	2.14 V	129	34.6	13.8
2	13330.00	38.7 AV	54.0	-15.3	2.14 V	129	24.9	13.8
3	19995.00	52.2 PK	74.0	-21.8	1.71 V	49	56.0	-3.8
4	19995.00	41.1 AV	54.0	-12.9	1.71 V	49	44.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.5 PK	88.2	-38.7	3.05 H	50	34.4	15.1
2	#13650.00	38.5 AV	68.2	-29.7	3.05 H	50	23.4	15.1
3	20475.00	51.1 PK	74.0	-22.9	1.55 H	205	54.0	-2.9
4	20475.00	42.2 AV	54.0	-11.8	1.55 H	205	45.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.1 PK	88.2	-40.1	2.09 V	147	33.0	15.1
2	#13650.00	38.5 AV	68.2	-29.7	2.09 V	147	23.4	15.1
3	20475.00	52.2 PK	74.0	-21.8	1.72 V	59	55.1	-2.9
4	20475.00	41.1 AV	54.0	-12.9	1.72 V	59	44.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	50.0 PK	88.2	-38.2	3.09 H	70	34.7	15.3
2	#13970.00	39.0 AV	68.2	-29.2	3.09 H	70	23.7	15.3
3	20955.00	52.0 PK	74.0	-22.0	1.65 H	187	54.6	-2.6
4	20955.00	43.0 AV	54.0	-11.0	1.65 H	187	45.6	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	48.3 PK	88.2	-39.9	2.14 V	152	33.0	15.3
2	#13970.00	38.6 AV	68.2	-29.6	2.14 V	152	23.3	15.3
3	20955.00	52.7 PK	74.0	-21.3	1.65 V	43	55.3	-2.6
4	20955.00	41.5 AV	54.0	-12.5	1.65 V	43	44.1	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.2 PK	74.0	-24.8	3.08 H	79	36.7	12.5
2	12050.00	38.3 AV	54.0	-15.7	3.08 H	79	25.8	12.5
3	18075.00	51.0 PK	74.0	-23.0	1.67 H	193	55.5	-4.5
4	18075.00	42.3 AV	54.0	-11.7	1.67 H	193	46.8	-4.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.0 PK	74.0	-26.0	2.11 V	157	35.5	12.5
2	12050.00	38.6 AV	54.0	-15.4	2.11 V	157	26.1	12.5
3	18075.00	52.3 PK	74.0	-21.7	1.66 V	36	56.8	-4.5
4	18075.00	41.0 AV	54.0	-13.0	1.66 V	36	45.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.8 PK	74.0	-24.2	3.06 H	71	36.8	13.0
2	12690.00	38.6 AV	54.0	-15.4	3.06 H	71	25.6	13.0
3	19035.00	51.4 PK	74.0	-22.6	1.61 H	199	55.5	-4.1
4	19035.00	42.6 AV	54.0	-11.4	1.61 H	199	46.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.0 PK	74.0	-26.0	2.08 V	150	35.0	13.0
2	12690.00	38.2 AV	54.0	-15.8	2.08 V	150	25.2	13.0
3	19035.00	51.9 PK	74.0	-22.1	1.69 V	51	56.0	-4.1
4	19035.00	41.0 AV	54.0	-13.0	1.69 V	51	45.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	50.2 PK	88.2	-38.0	3.08 H	71	37.0	13.2
2	#13010.00	39.1 AV	68.2	-29.1	3.08 H	71	25.9	13.2
3	19515.00	51.5 PK	74.0	-22.5	1.64 H	206	55.0	-3.5
4	19515.00	42.9 AV	54.0	-11.1	1.64 H	206	46.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	47.8 PK	88.2	-40.4	2.03 V	139	34.6	13.2
2	#13010.00	38.0 AV	68.2	-30.2	2.03 V	139	24.8	13.2
3	19515.00	52.2 PK	74.0	-21.8	1.64 V	58	55.7	-3.5
4	19515.00	41.1 AV	54.0	-12.9	1.64 V	58	44.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.5 PK	74.0	-24.5	3.09 H	65	35.7	13.8
2	13330.00	38.5 AV	54.0	-15.5	3.09 H	65	24.7	13.8
3	19995.00	51.1 PK	74.0	-22.9	1.56 H	211	54.9	-3.8
4	19995.00	42.4 AV	54.0	-11.6	1.56 H	211	46.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.8 PK	74.0	-25.2	2.04 V	140	35.0	13.8
2	13330.00	38.8 AV	54.0	-15.2	2.04 V	140	25.0	13.8
3	19995.00	52.2 PK	74.0	-21.8	1.66 V	35	56.0	-3.8
4	19995.00	41.1 AV	54.0	-12.9	1.66 V	35	44.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.1 PK	88.2	-39.1	3.05 H	61	34.0	15.1
2	#13650.00	38.4 AV	68.2	-29.8	3.05 H	61	23.3	15.1
3	20475.00	50.8 PK	74.0	-23.2	1.61 H	193	53.7	-2.9
4	20475.00	42.3 AV	54.0	-11.7	1.61 H	193	45.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	47.4 PK	88.2	-40.8	2.13 V	139	32.3	15.1
2	#13650.00	37.9 AV	68.2	-30.3	2.13 V	139	22.8	15.1
3	20475.00	51.9 PK	74.0	-22.1	1.69 V	35	54.8	-2.9
4	20475.00	41.0 AV	54.0	-13.0	1.69 V	35	43.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.5 PK	88.2	-38.7	3.07 H	56	34.2	15.3
2	#13970.00	38.3 AV	68.2	-29.9	3.07 H	56	23.0	15.3
3	20955.00	51.7 PK	74.0	-22.3	1.67 H	196	54.3	-2.6
4	20955.00	42.9 AV	54.0	-11.1	1.67 H	196	45.5	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	47.8 PK	88.2	-40.4	2.09 V	146	32.5	15.3
2	#13970.00	38.0 AV	68.2	-30.2	2.09 V	146	22.7	15.3
3	20955.00	53.0 PK	74.0	-21.0	1.67 V	28	55.6	-2.6
4	20955.00	41.8 AV	54.0	-12.2	1.67 V	28	44.4	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

under control of a Standard Power AP

Mode A


Conducted Unwanted Emissions

1TX


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.76	46.08 PK	74	-27.92	-57.55	8.37	-49.18
2	5457.76	40.33 AV	54	-13.67	-63.3	8.37	-54.93
3	11908.44	50.2 PK	74	-23.8	-53.43	8.37	-45.06
4	11908.44	44.64 AV	54	-9.36	-58.99	8.37	-50.62
5	21091.8	42.66 PK	74	-31.34	-60.97	8.37	-52.6
6	21091.8	34.65 AV	54	-19.35	-68.98	8.37	-60.61
7	23907.2	46.3 PK	74	-27.7	-57.33	8.37	-48.96
8	23907.2	36.29 AV	54	-17.71	-67.34	8.37	-58.97
9	39595.11	44.47 PK	74	-29.53	-59.16	8.37	-50.79
10	39595.11	30.97 AV	54	-23.03	-72.66	8.37	-64.29

Note: Margin value = Emission Level - Limit value

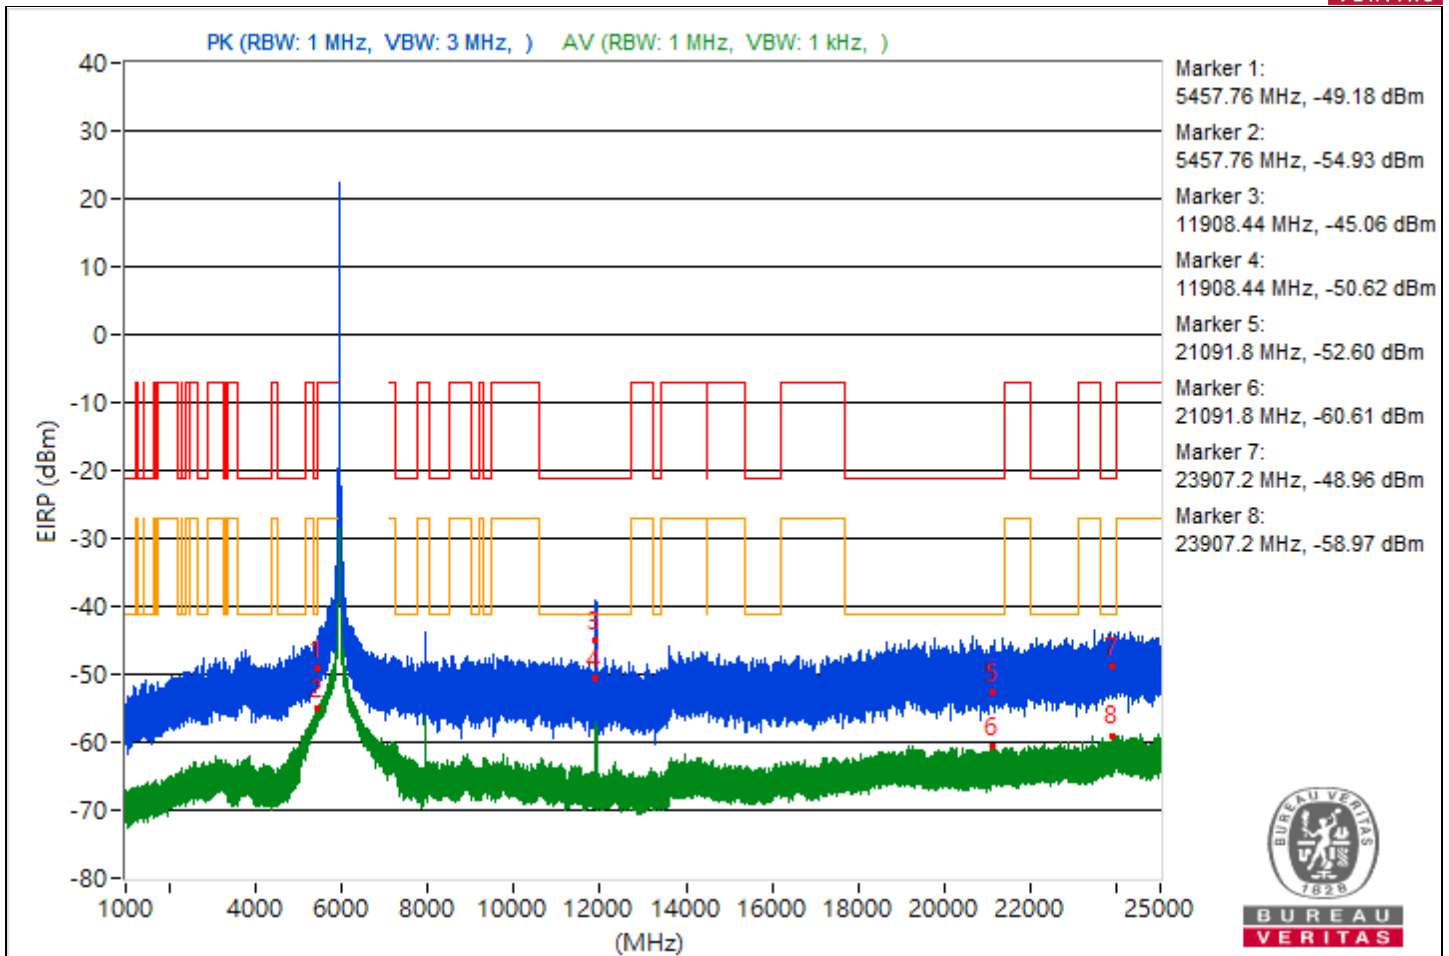

BUREAU
VERITAS

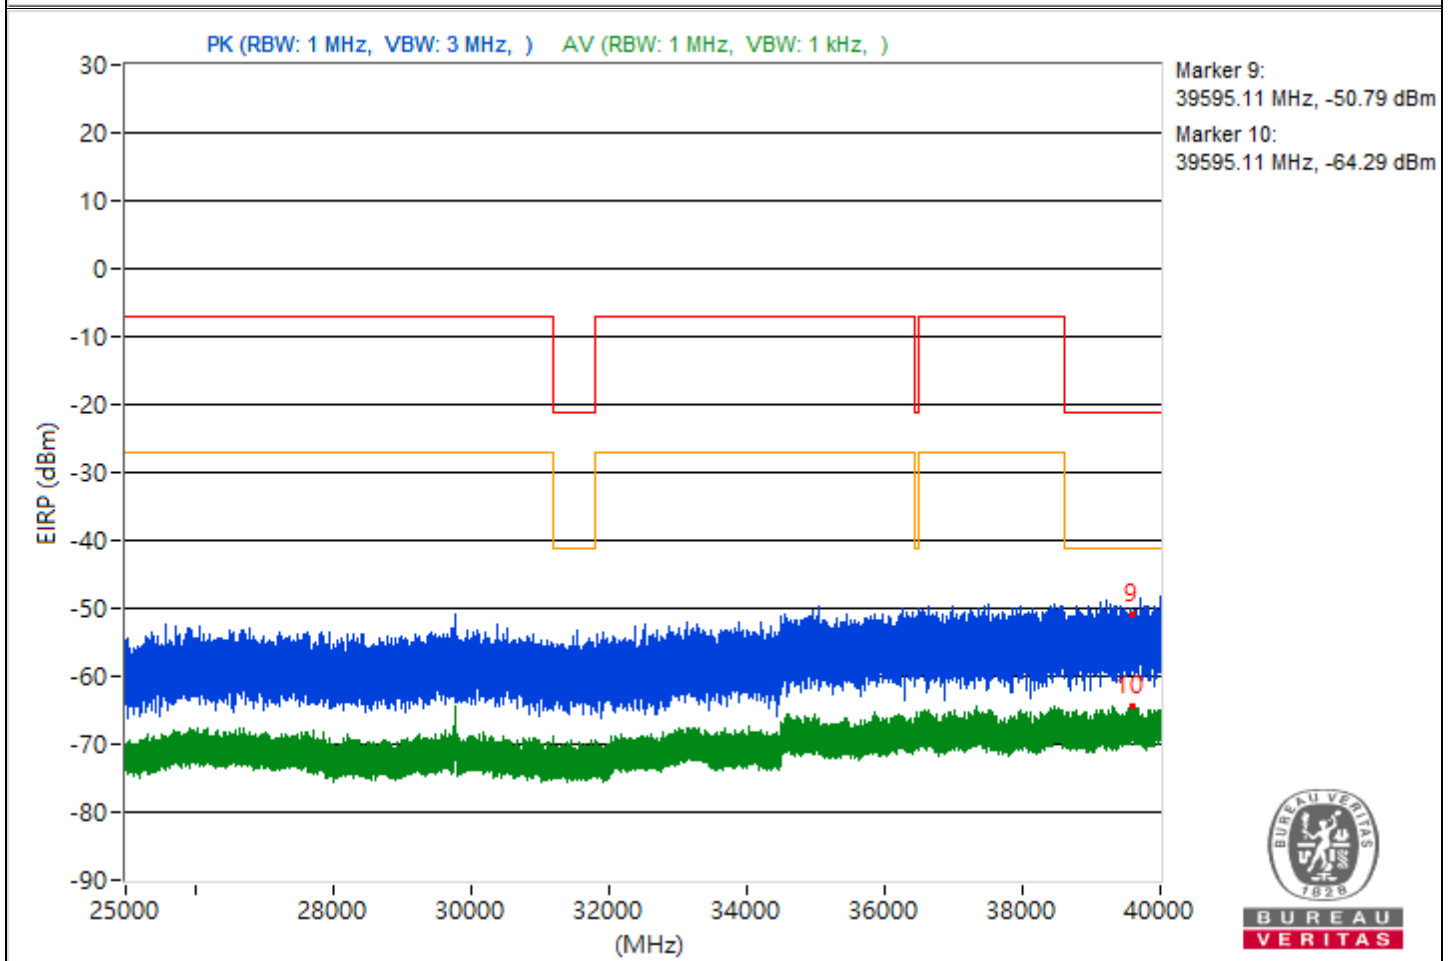



BUREAU
VERITAS

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.42	46.49 PK	74	-27.51	-57.14	8.37	-48.77
2	5455.42	38.7 AV	54	-15.3	-64.93	8.37	-56.56
3	12350.4	45.07 PK	74	-28.93	-58.56	8.37	-50.19
4	12350.4	38.45 AV	54	-15.55	-65.18	8.37	-56.81
5	19154	46.09 PK	74	-27.91	-57.54	8.37	-49.17
6	19154	34.88 AV	54	-19.12	-68.75	8.37	-60.38
7	23967.8	46.21 PK	74	-27.79	-57.42	8.37	-49.05
8	23967.8	36.31 AV	54	-17.69	-67.32	8.37	-58.95
9	39138.58	41.01 PK	74	-32.99	-62.62	8.37	-54.25
10	39138.58	30.99 AV	54	-23.01	-72.64	8.37	-64.27

Note: Margin value = Emission Level - Limit value

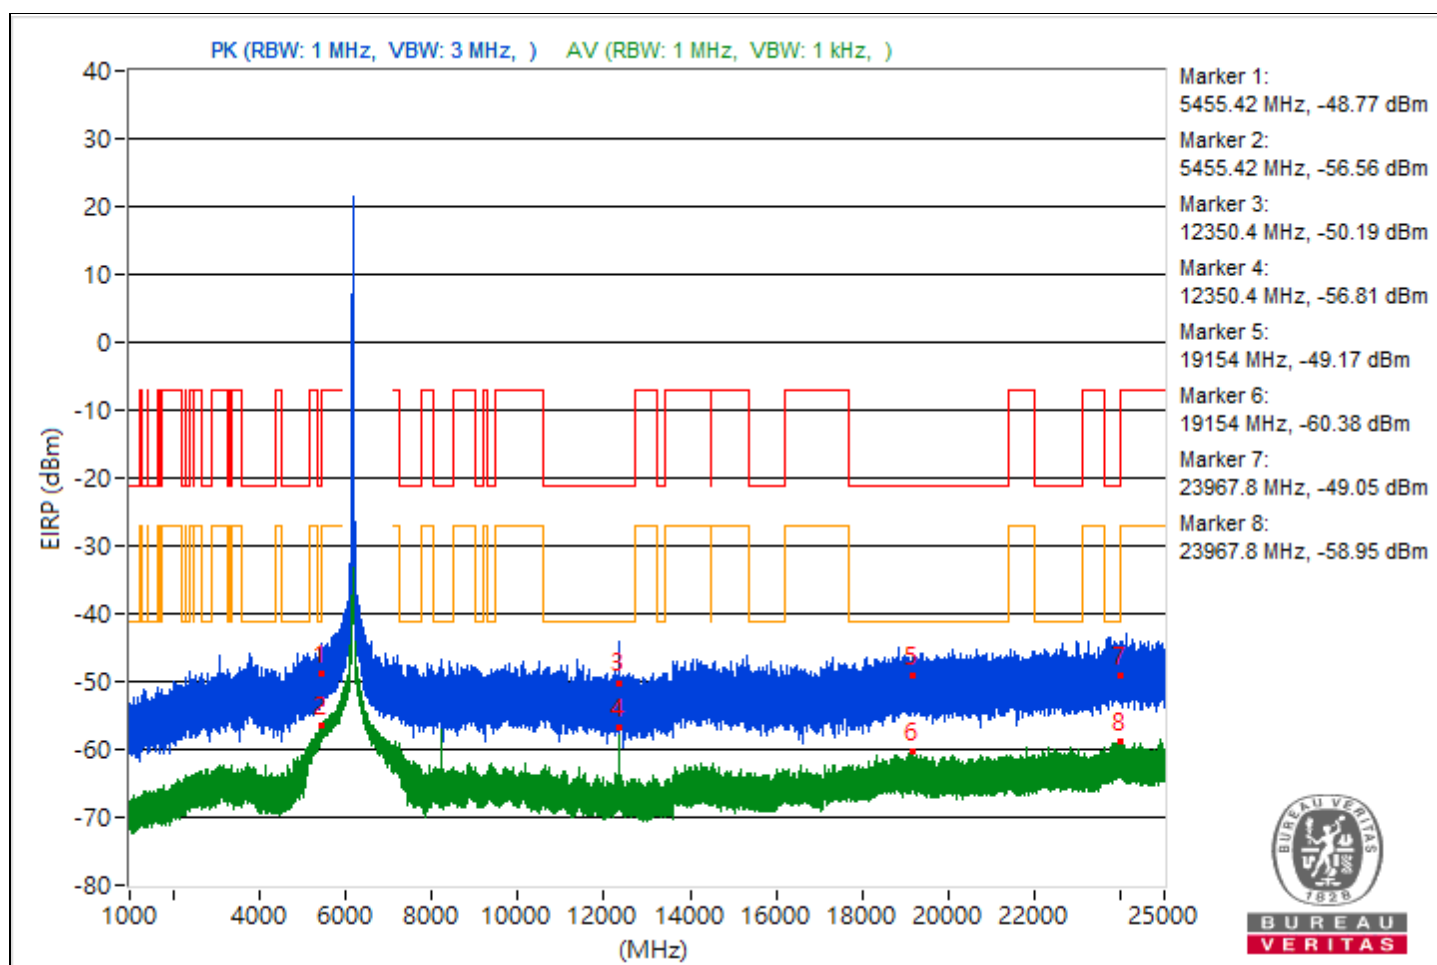


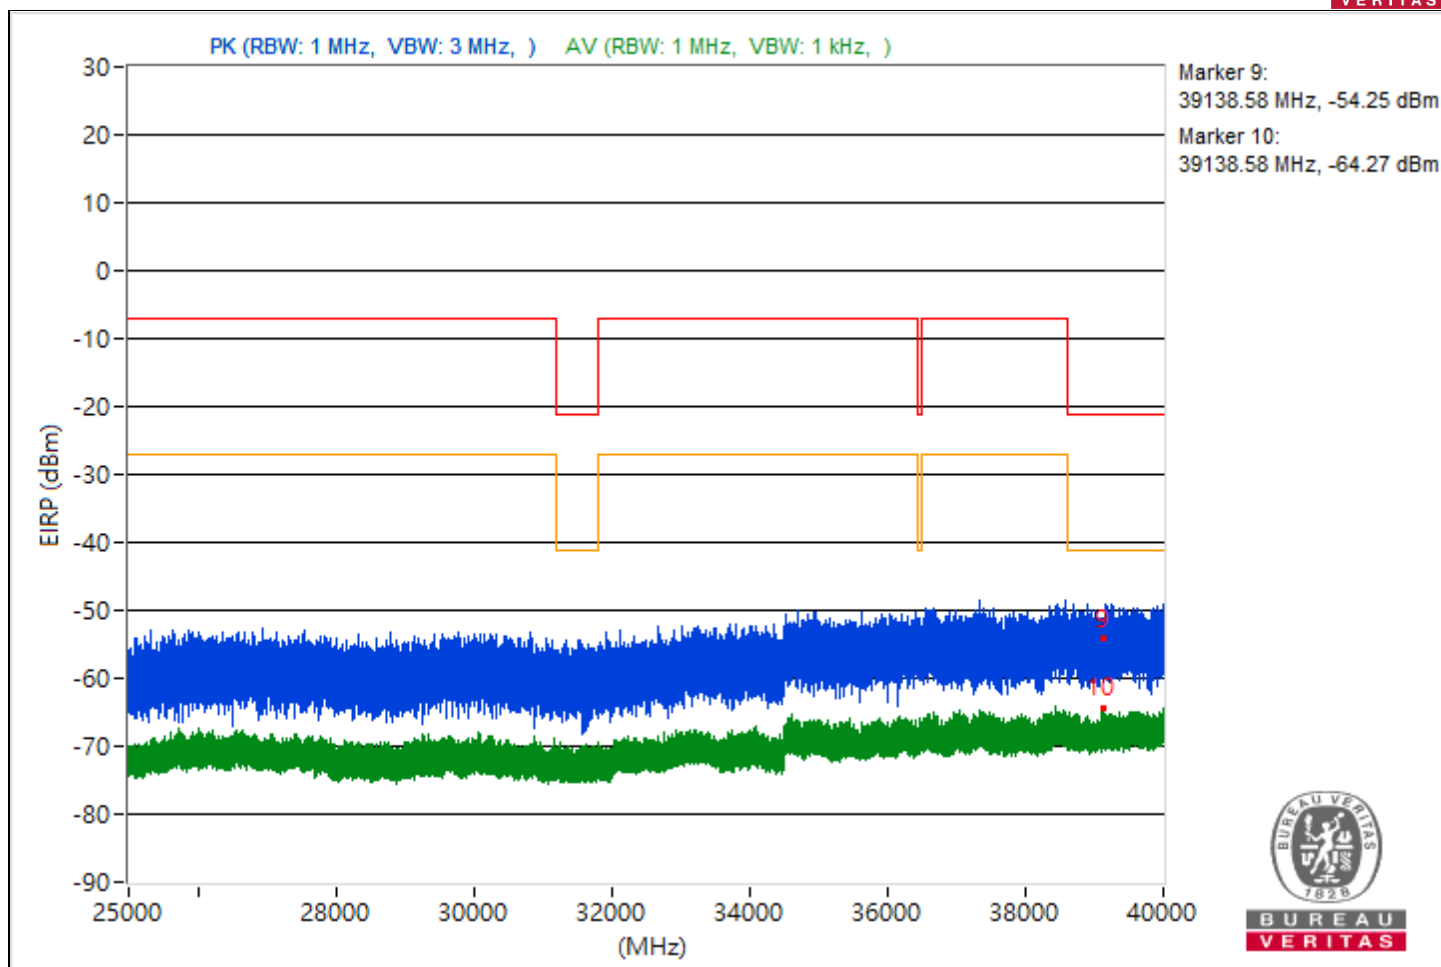


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.31	43.49 PK	74	-30.51	-60.14	8.37	-51.77
2	5459.31	37.82 AV	54	-16.18	-65.81	8.37	-57.44
3	7260.88	45.55 PK	74	-28.45	-58.08	8.37	-49.71
4	7260.88	36.53 AV	54	-17.47	-67.1	8.37	-58.73
5	19278.3	43.08 PK	74	-30.92	-60.55	8.37	-52.18
6	19278.3	34.96 AV	54	-19.04	-68.67	8.37	-60.3
7	23904.2	46.7 PK	74	-27.3	-56.93	8.37	-48.56
8	23904.2	36.22 AV	54	-17.78	-67.41	8.37	-59.04
9	39639.73	42.44 PK	74	-31.56	-61.19	8.37	-52.82
10	39639.73	30.89 AV	54	-23.11	-72.74	8.37	-64.37

Note: Margin value = Emission Level - Limit value

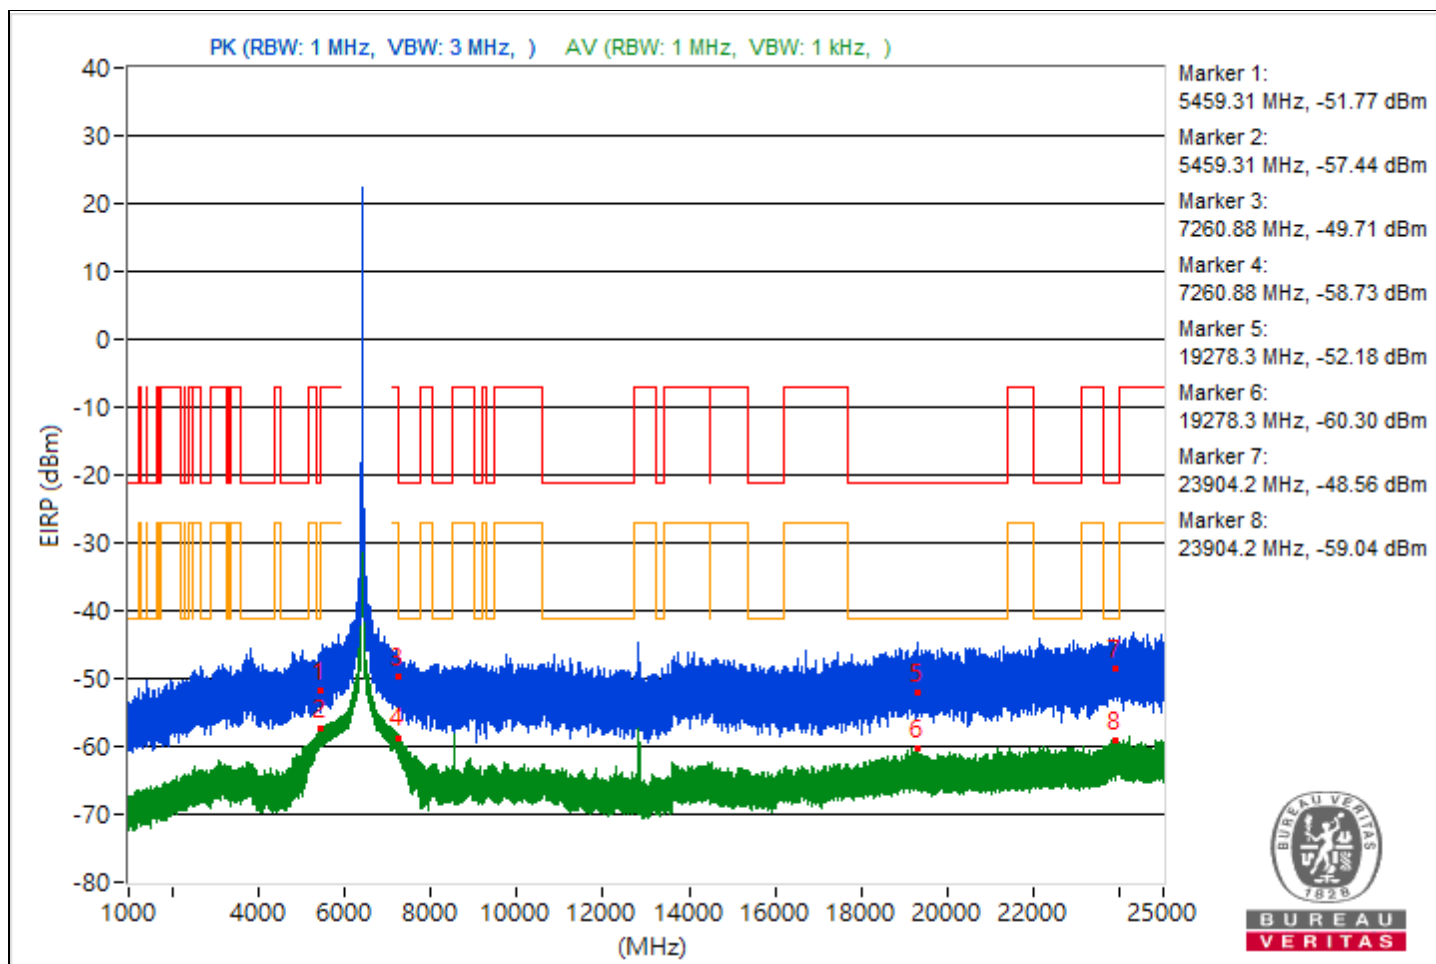


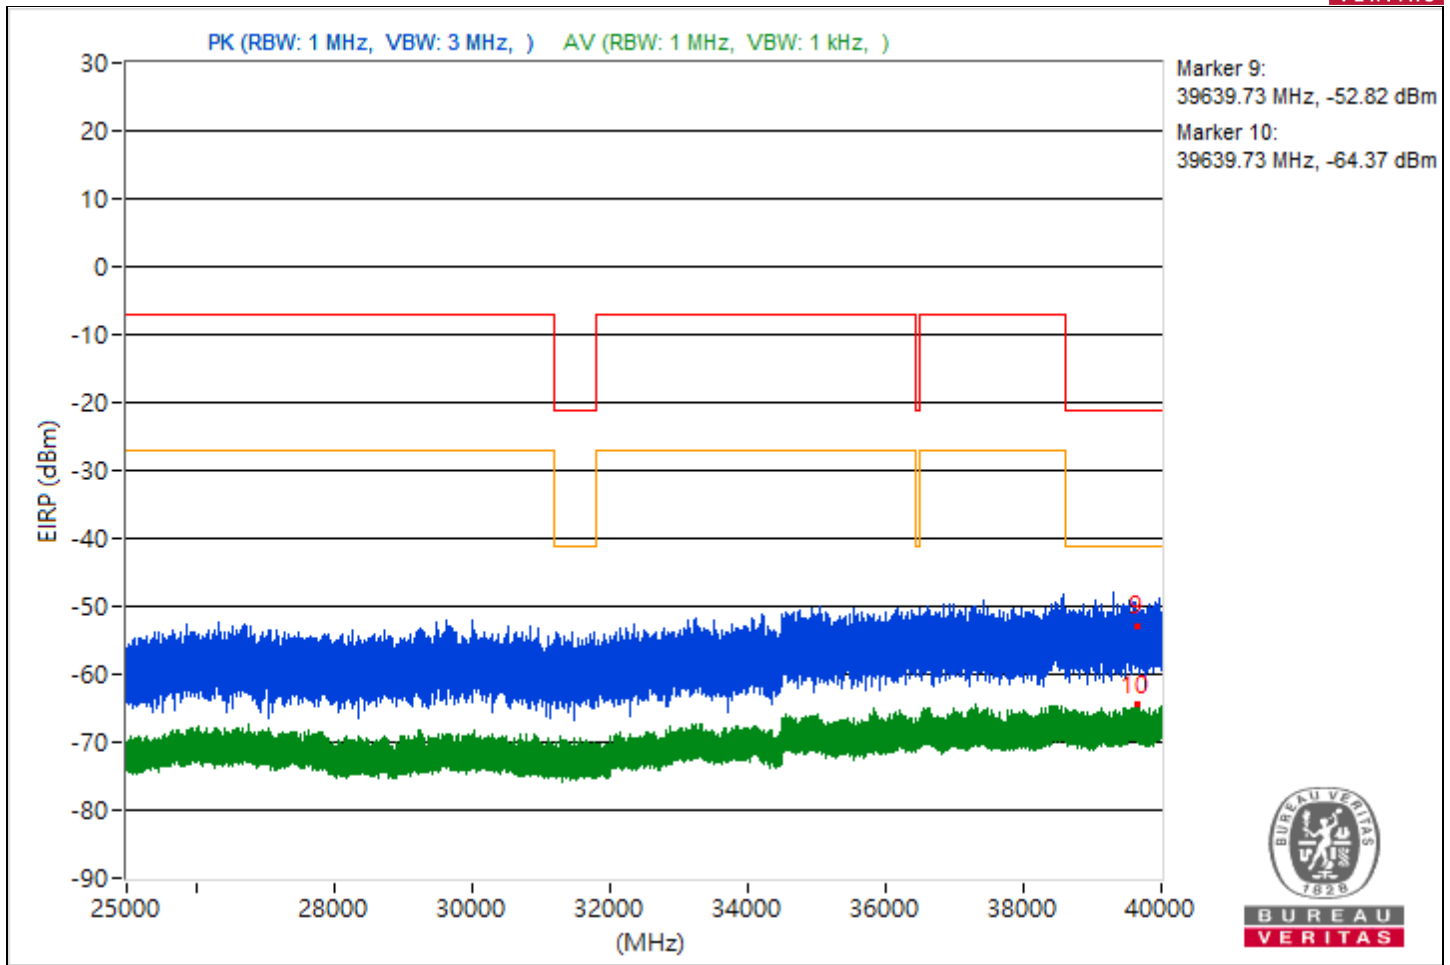


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.87	44.56 PK	74	-29.44	-59.07	8.37	-50.7
2	5446.87	37.68 AV	54	-16.32	-65.95	8.37	-57.58
3	7258.93	45.88 PK	74	-28.12	-57.75	8.37	-49.38
4	7258.93	37.46 AV	54	-16.54	-66.17	8.37	-57.8
5	20227.4	44.83 PK	74	-29.17	-58.8	8.37	-50.43
6	20227.4	35.05 AV	54	-18.95	-68.58	8.37	-60.21
7	23999.6	47.32 PK	74	-26.68	-56.31	8.37	-47.94
8	23999.6	37.27 AV	54	-16.73	-66.36	8.37	-57.99
9	39540.09	42.93 PK	74	-31.07	-60.7	8.37	-52.33
10	39540.09	31.04 AV	54	-22.96	-72.59	8.37	-64.22

Note: Margin value = Emission Level - Limit value

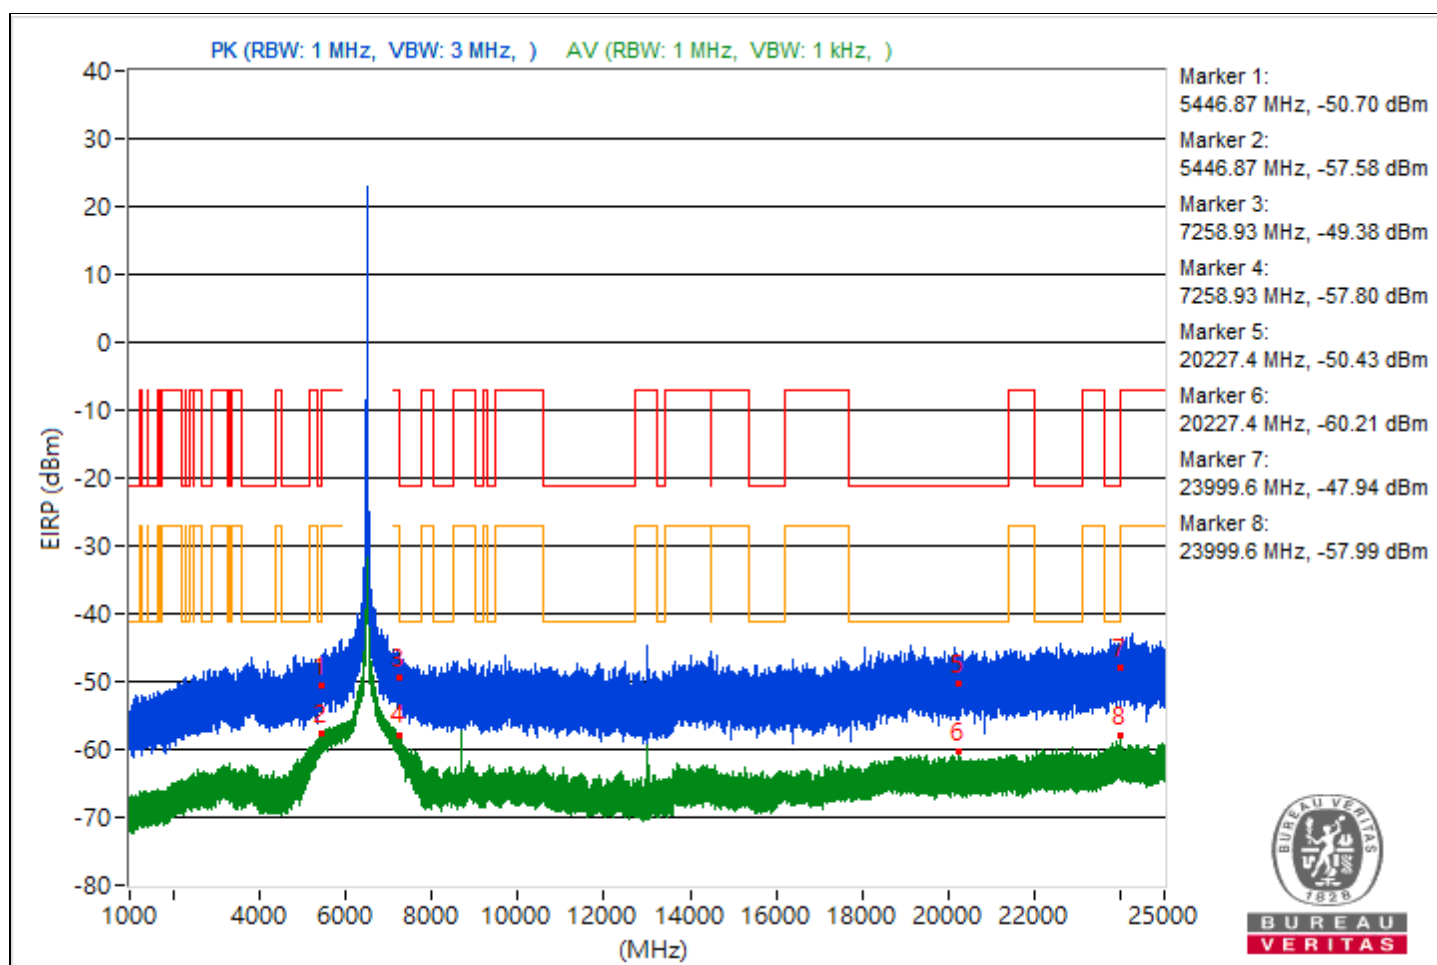

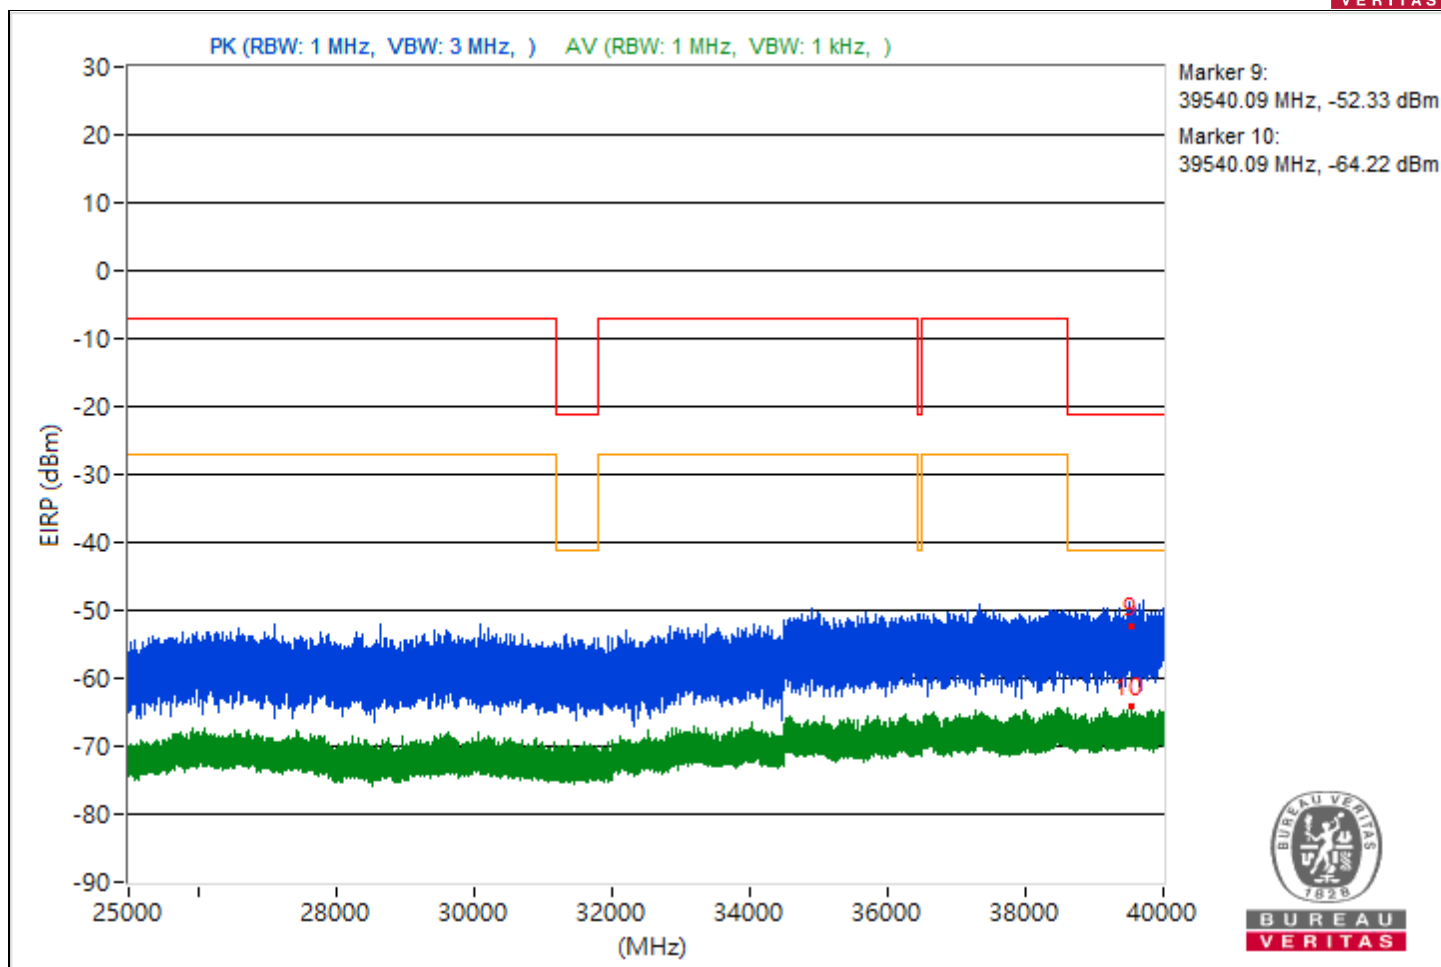



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5437.14	48.64 PK	74	-25.36	-54.99	8.37	-46.62
2	5437.14	36.61 AV	54	-17.39	-67.02	8.37	-58.65
3	13390.58	52.84 PK	74	-21.16	-50.79	8.37	-42.42
4	13390.58	43.98 AV	54	-10.02	-59.65	8.37	-51.28
5	20090	46.54 PK	74	-27.46	-57.09	8.37	-48.72
6	20090	37.15 AV	54	-16.85	-66.48	8.37	-58.11
7	23845.9	47.87 PK	74	-26.13	-55.76	8.37	-47.39
8	23845.9	35.84 AV	54	-18.16	-67.79	8.37	-59.42
9	39639.11	40.15 PK	74	-33.85	-63.48	8.37	-55.11
10	39639.11	30.81 AV	54	-23.19	-72.82	8.37	-64.45

Note: Margin value = Emission Level - Limit value

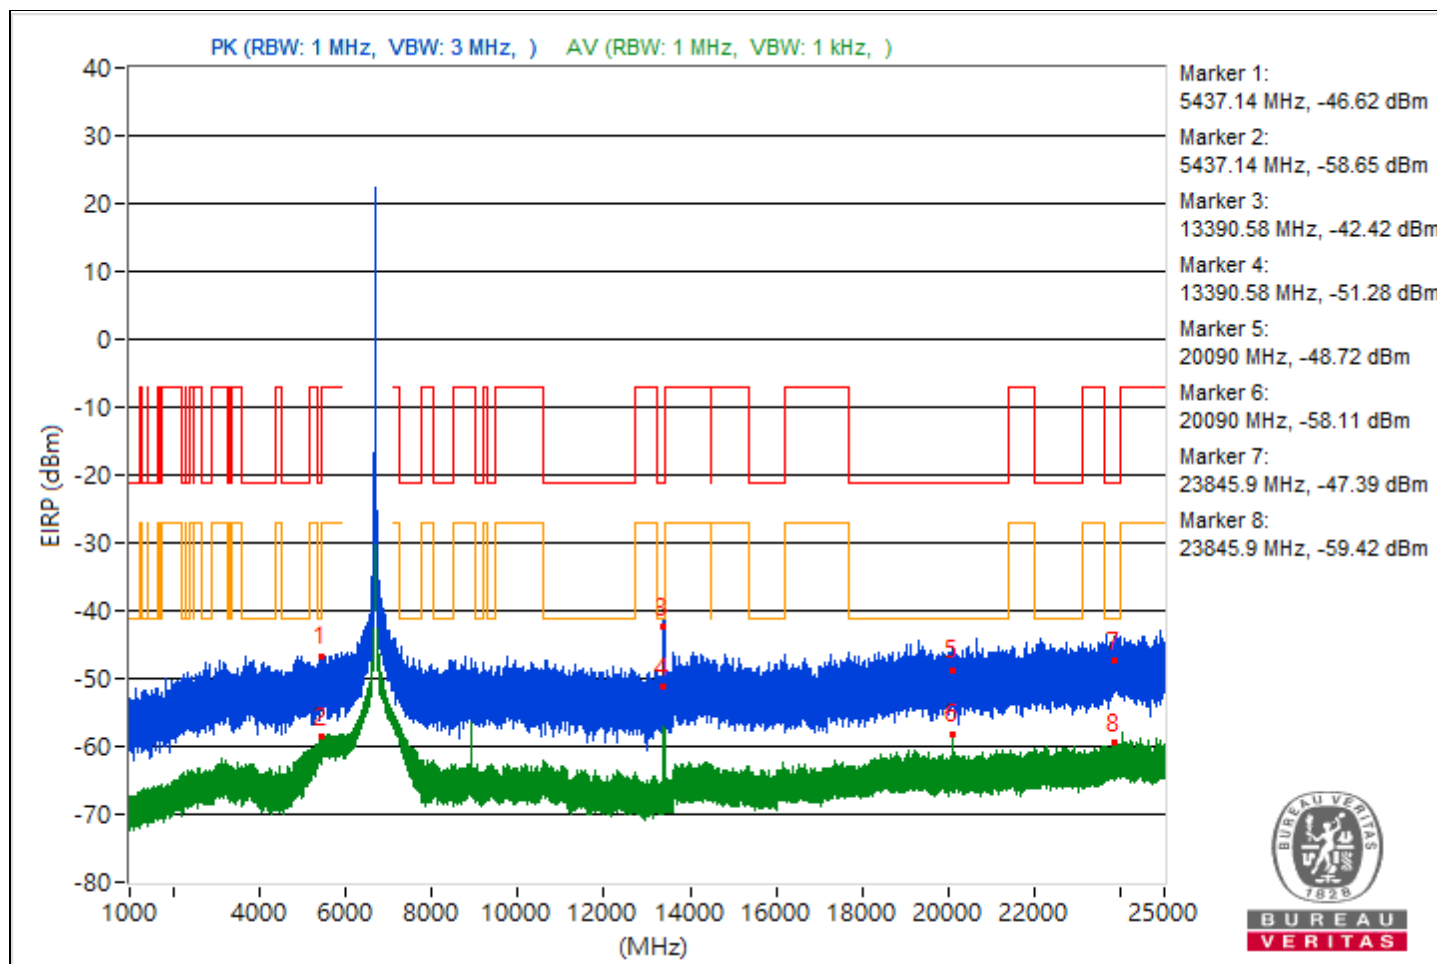


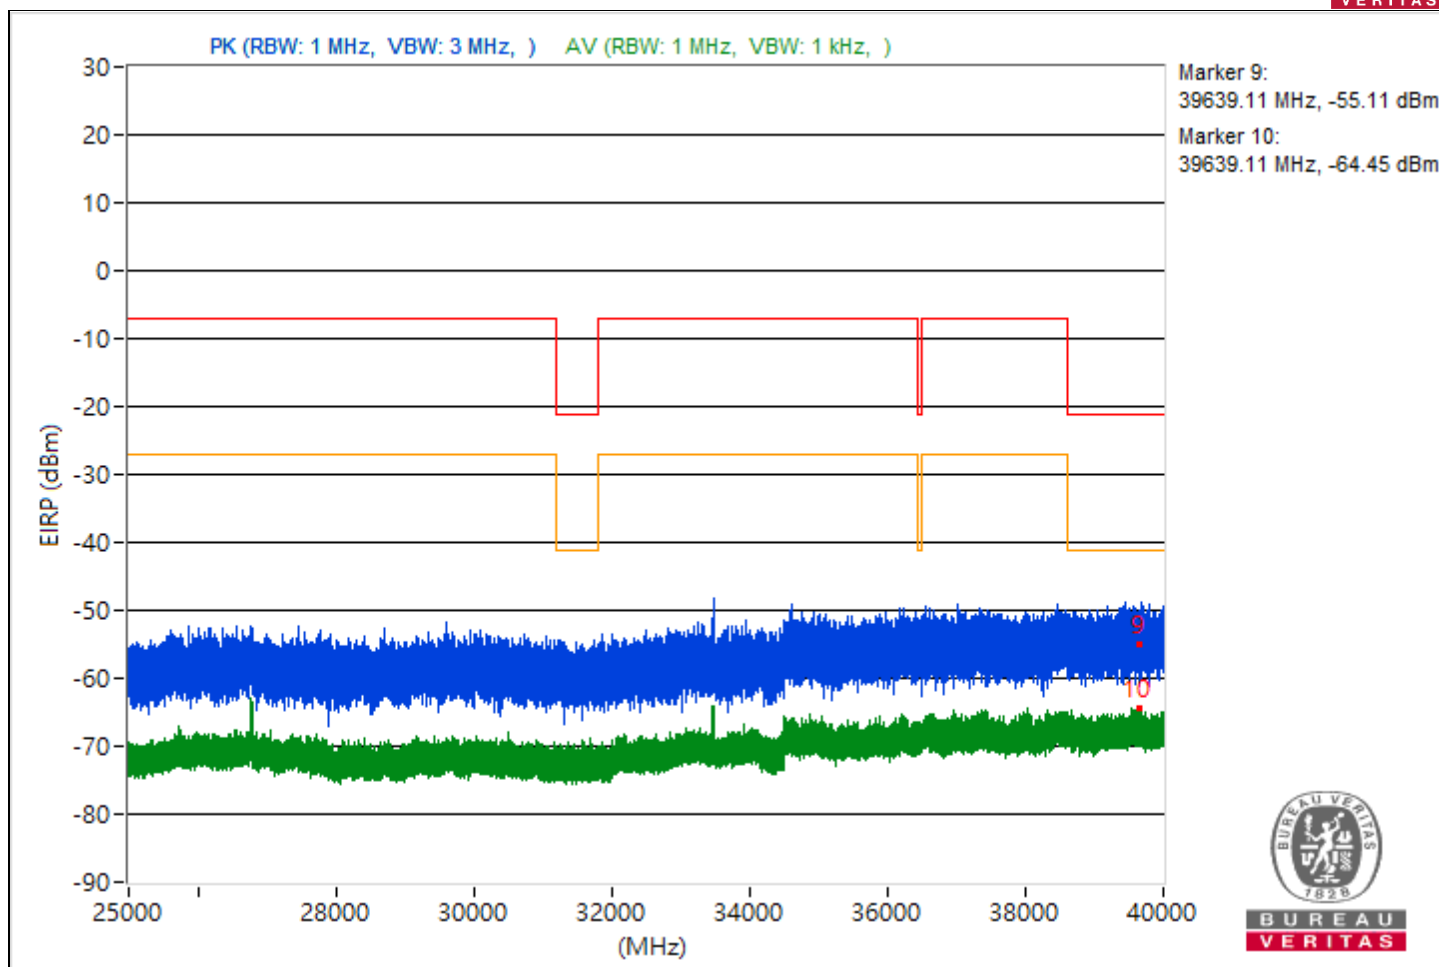


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.77	43.66 PK	74	-30.34	-59.97	8.37	-51.6
2	5458.77	35.85 AV	54	-18.15	-67.78	8.37	-59.41
3	7258.7	48.62 PK	74	-25.38	-55.01	8.37	-46.64
4	7258.7	39.84 AV	54	-14.16	-63.79	8.37	-55.42
5	20569.4	46.7 PK	74	-27.3	-56.93	8.37	-48.56
6	20569.4	36.81 AV	54	-17.19	-66.82	8.37	-58.45
7	23928.7	48.52 PK	74	-25.48	-55.11	8.37	-46.74
8	23928.7	36.11 AV	54	-17.89	-67.52	8.37	-59.15
9	39881.87	42.05 PK	74	-31.95	-61.58	8.37	-53.21
10	39881.87	31.28 AV	54	-22.72	-72.35	8.37	-63.98

Note: Margin value = Emission Level - Limit value

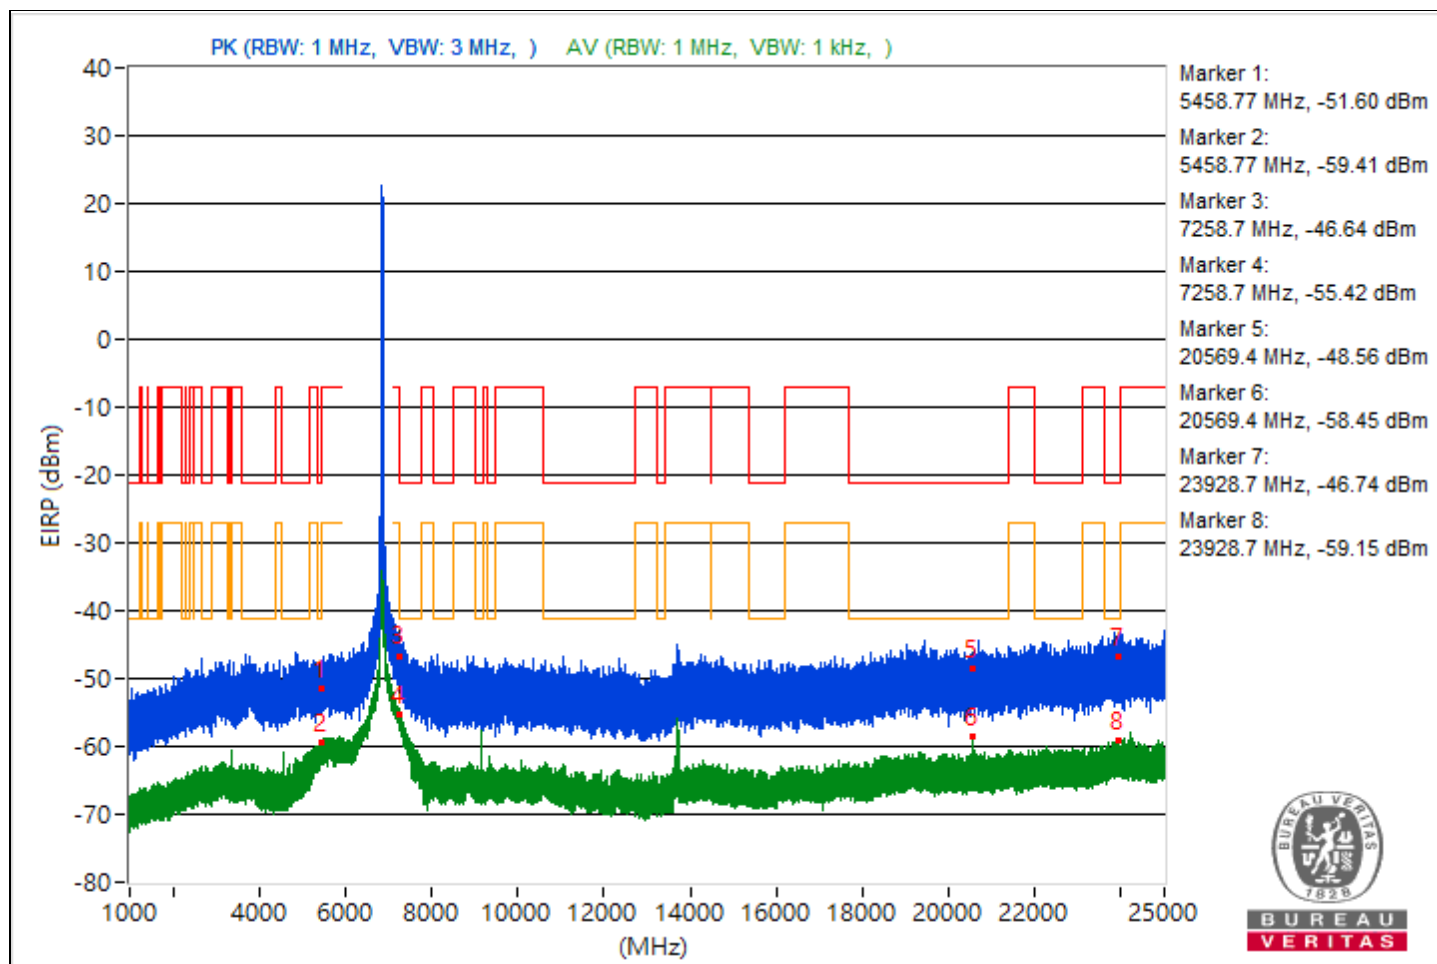

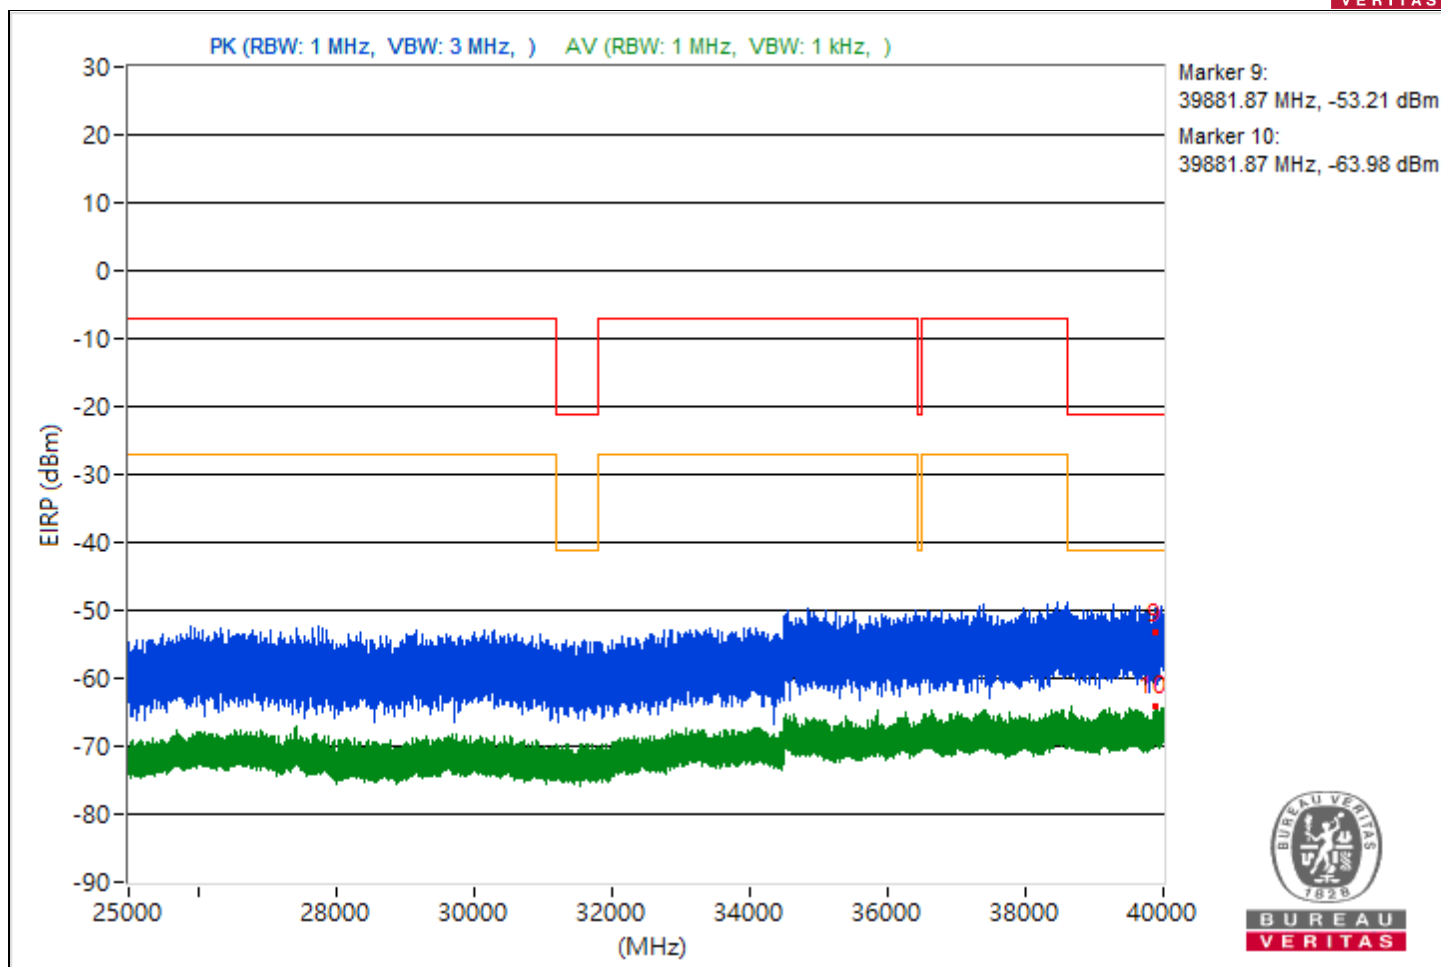



1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.84	47.68 PK	74	-26.32	-55.95	8.37	-47.58
2	5458.84	39.98 AV	54	-14.02	-63.65	8.37	-55.28
3	11909.96	48.85 PK	74	-25.15	-54.78	8.37	-46.41
4	11909.96	44.18 AV	54	-9.82	-59.45	8.37	-51.08
5	19870.1	43.93 PK	74	-30.07	-59.7	8.37	-51.33
6	19870.1	34.91 AV	54	-19.09	-68.72	8.37	-60.35
7	23974.7	48.26 PK	74	-25.74	-55.37	8.37	-47
8	23974.7	36.37 AV	54	-17.63	-67.26	8.37	-58.89
9	39553.69	39.68 PK	74	-34.32	-63.95	8.37	-55.58
10	39553.69	30.66 AV	54	-23.34	-72.97	8.37	-64.6

Note: Margin value = Emission Level - Limit value

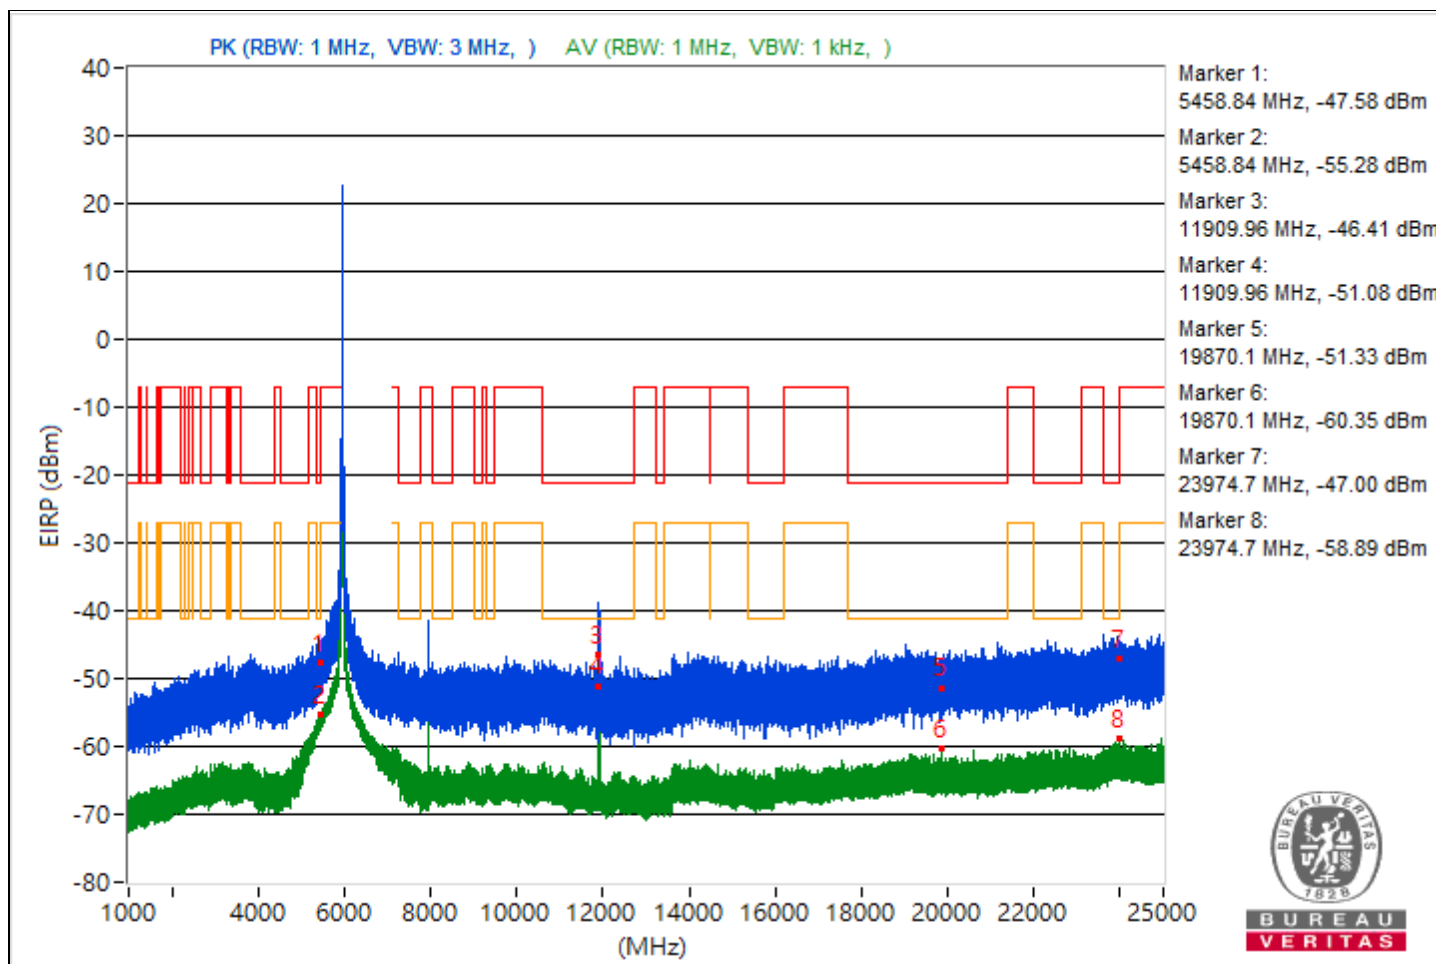


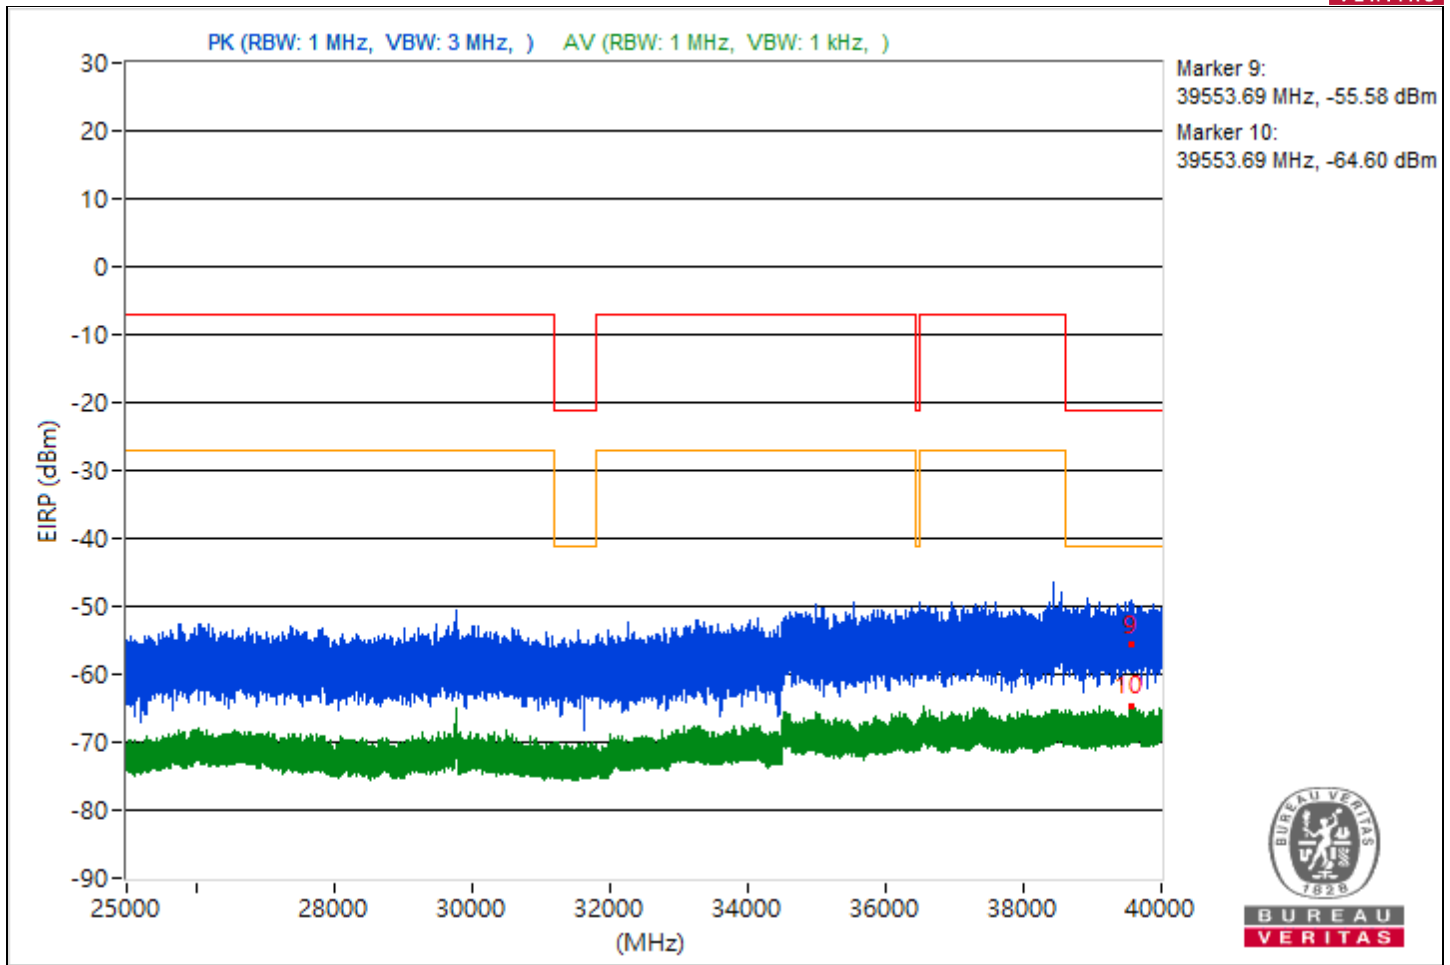


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.16	45.13 PK	74	-28.87	-58.5	8.37	-50.13
2	5459.16	38.41 AV	54	-15.59	-65.22	8.37	-56.85
3	8233.24	50.22 PK	74	-23.78	-53.41	8.37	-45.04
4	8233.24	47.78 AV	54	-6.22	-55.85	8.37	-47.48
5	19358	46.99 PK	74	-27.01	-56.64	8.37	-48.27
6	19358	34.72 AV	54	-19.28	-68.91	8.37	-60.54
7	23965.1	45.27 PK	74	-28.73	-58.36	8.37	-49.99
8	23965.1	36.45 AV	54	-17.55	-67.18	8.37	-58.81
9	39729.33	40.29 PK	74	-33.71	-63.34	8.37	-54.97
10	39729.33	30.52 AV	54	-23.48	-73.11	8.37	-64.74

Note: Margin value = Emission Level - Limit value

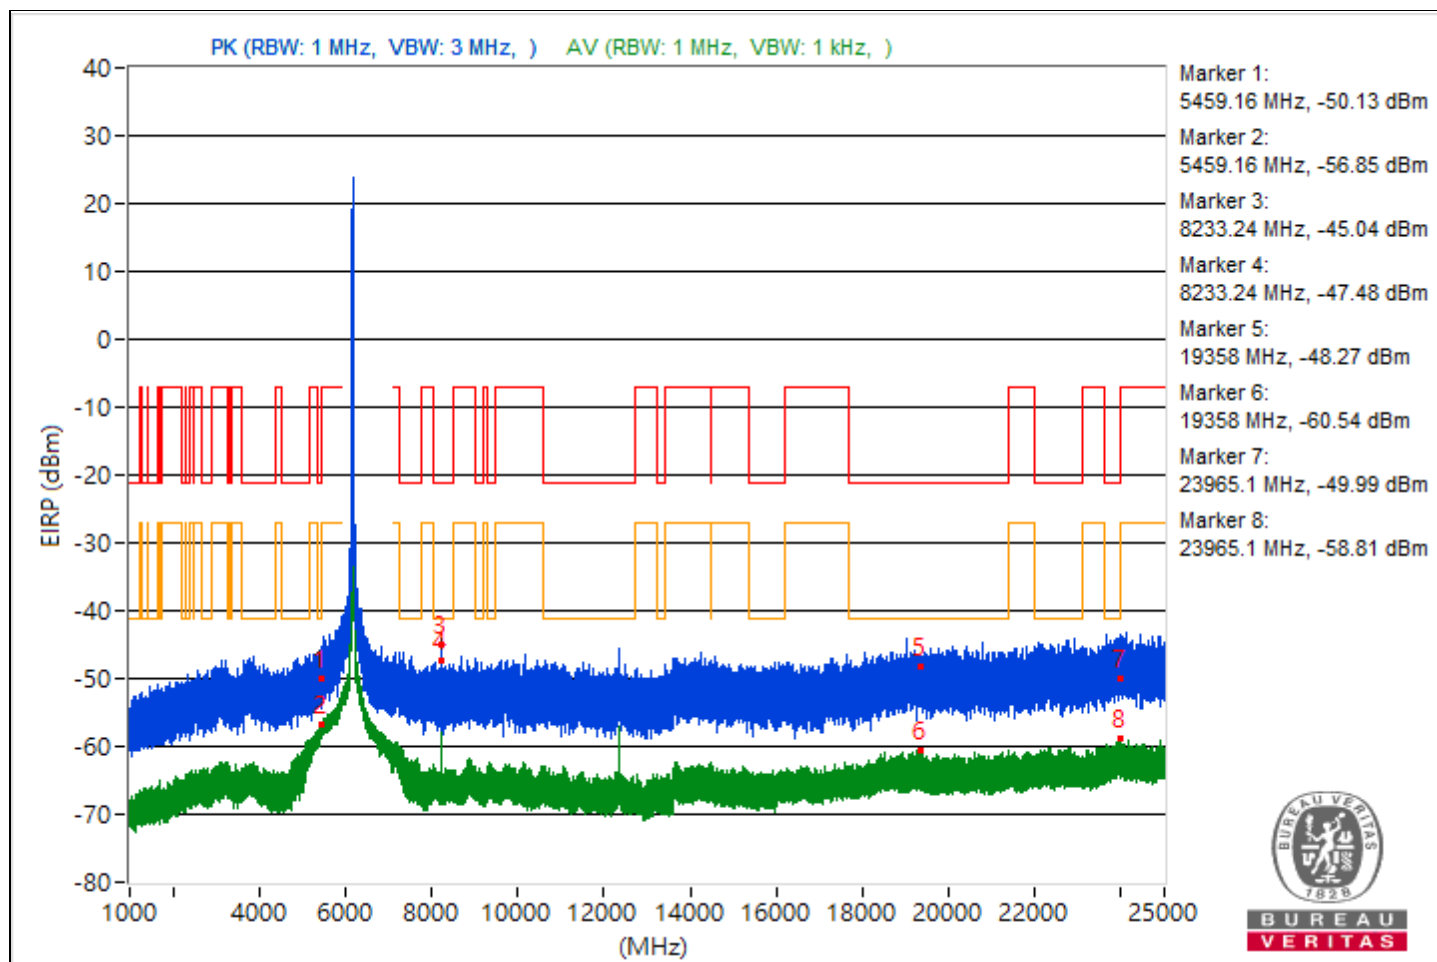


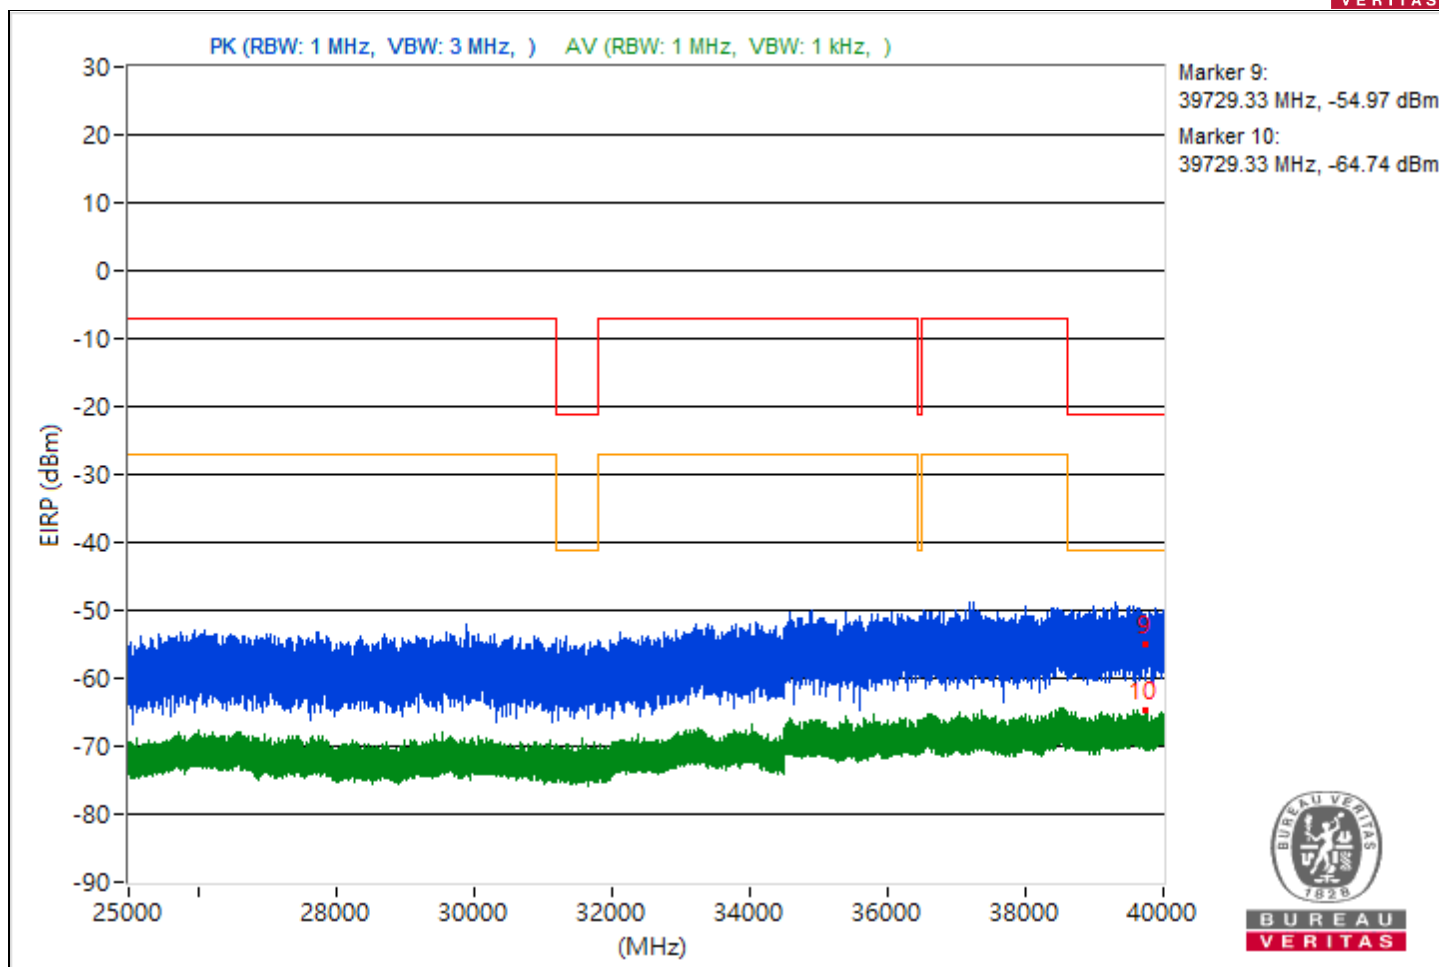


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.79	46.04 PK	74	-27.96	-57.59	8.37	-49.22
2	5446.79	37.63 AV	54	-16.37	-66	8.37	-57.63
3	7263.83	46.13 PK	74	-27.87	-57.5	8.37	-49.13
4	7263.83	36.29 AV	54	-17.71	-67.34	8.37	-58.97
5	18786.2	42.72 PK	74	-31.28	-60.91	8.37	-52.54
6	18786.2	34.39 AV	54	-19.61	-69.24	8.37	-60.87
7	23908.5	48.19 PK	74	-25.81	-55.44	8.37	-47.07
8	23908.5	36.03 AV	54	-17.97	-67.6	8.37	-59.23
9	39941.33	38.06 PK	74	-35.94	-65.57	8.37	-57.2
10	39941.33	30.67 AV	54	-23.33	-72.96	8.37	-64.59

Note: Margin value = Emission Level - Limit value

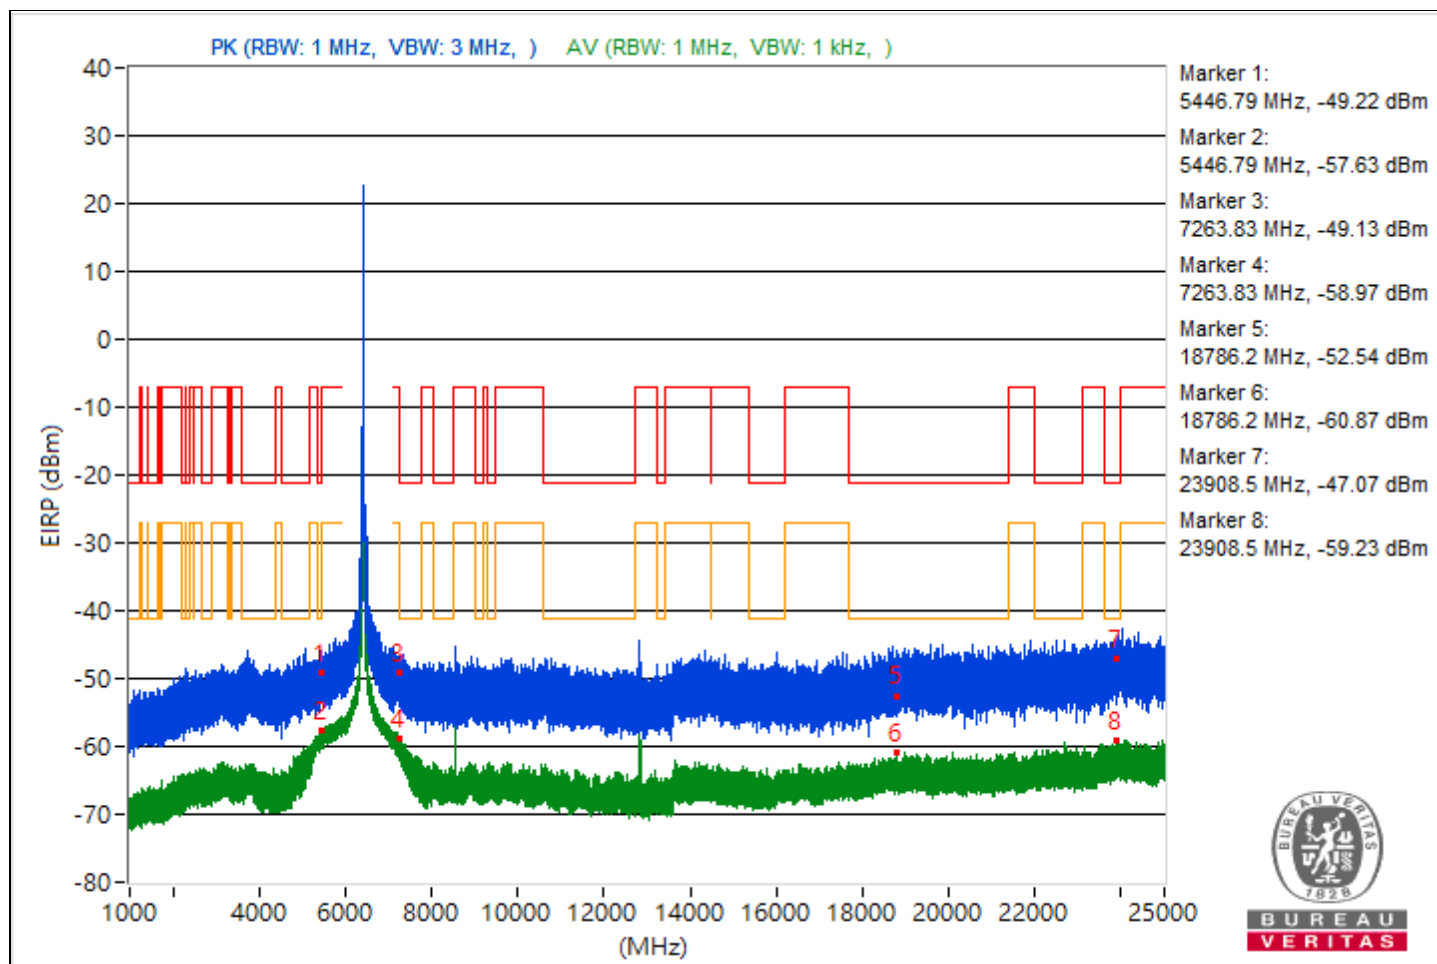


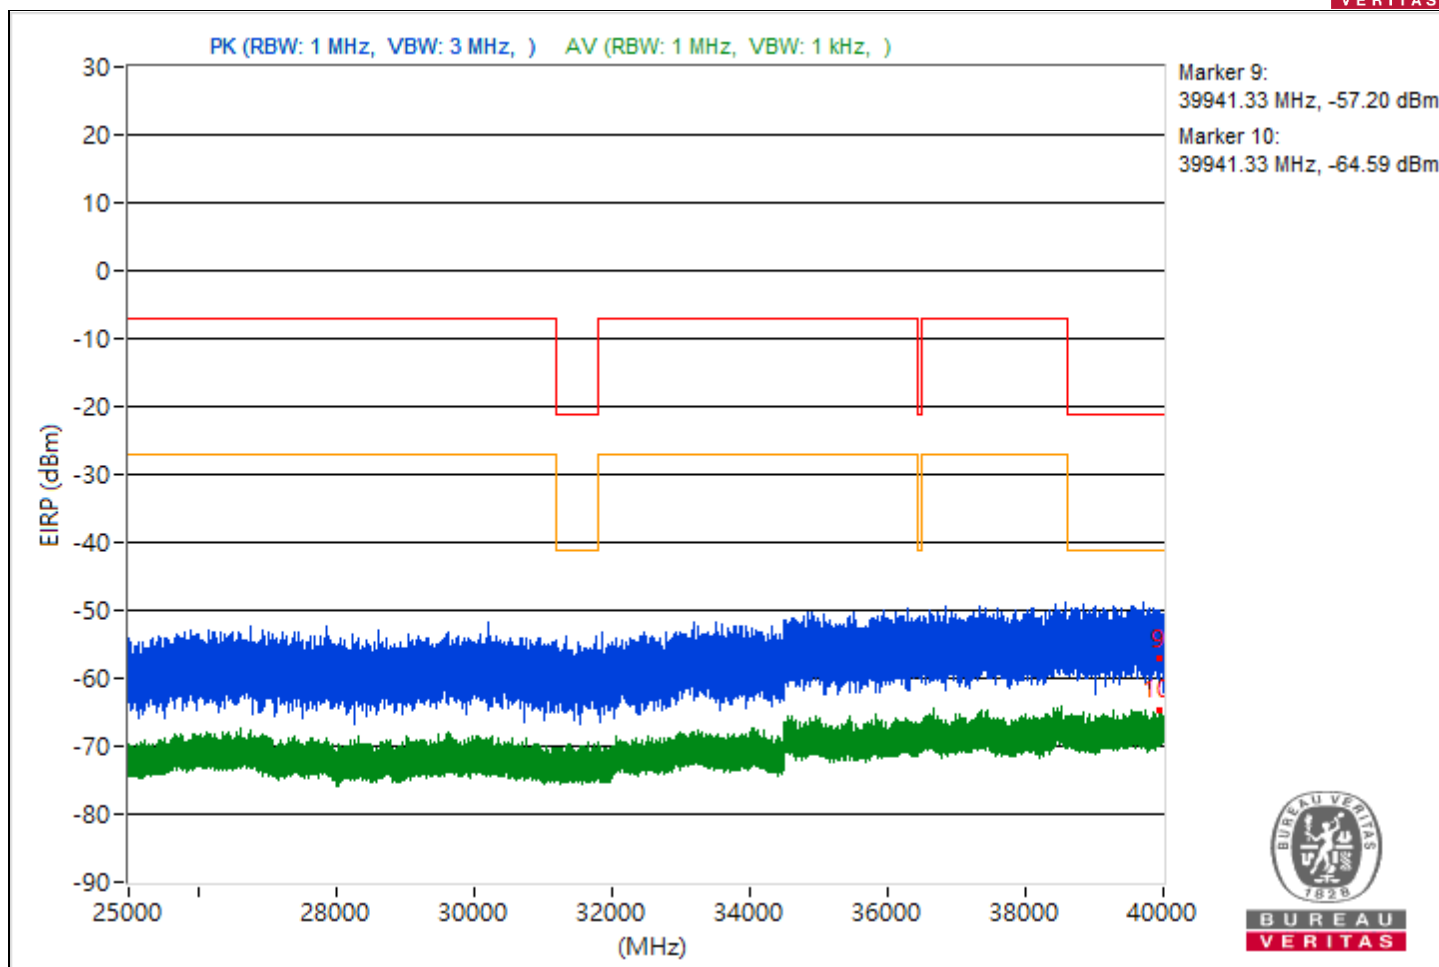


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5448.42	45.76 PK	74	-28.24	-57.87	8.37	-49.5
2	5448.42	36.69 AV	54	-17.31	-66.94	8.37	-58.57
3	7254.19	44.35 PK	74	-29.65	-59.28	8.37	-50.91
4	7254.19	36.6 AV	54	-17.4	-67.03	8.37	-58.66
5	19041	45.35 PK	74	-28.65	-58.28	8.37	-49.91
6	19041	34.51 AV	54	-19.49	-69.12	8.37	-60.75
7	23998	47.14 PK	74	-26.86	-56.49	8.37	-48.12
8	23998	35.99 AV	54	-18.01	-67.64	8.37	-59.27
9	39597.78	38.14 PK	74	-35.86	-65.49	8.37	-57.12
10	39597.78	30.75 AV	54	-23.25	-72.88	8.37	-64.51

Note: Margin value = Emission Level - Limit value

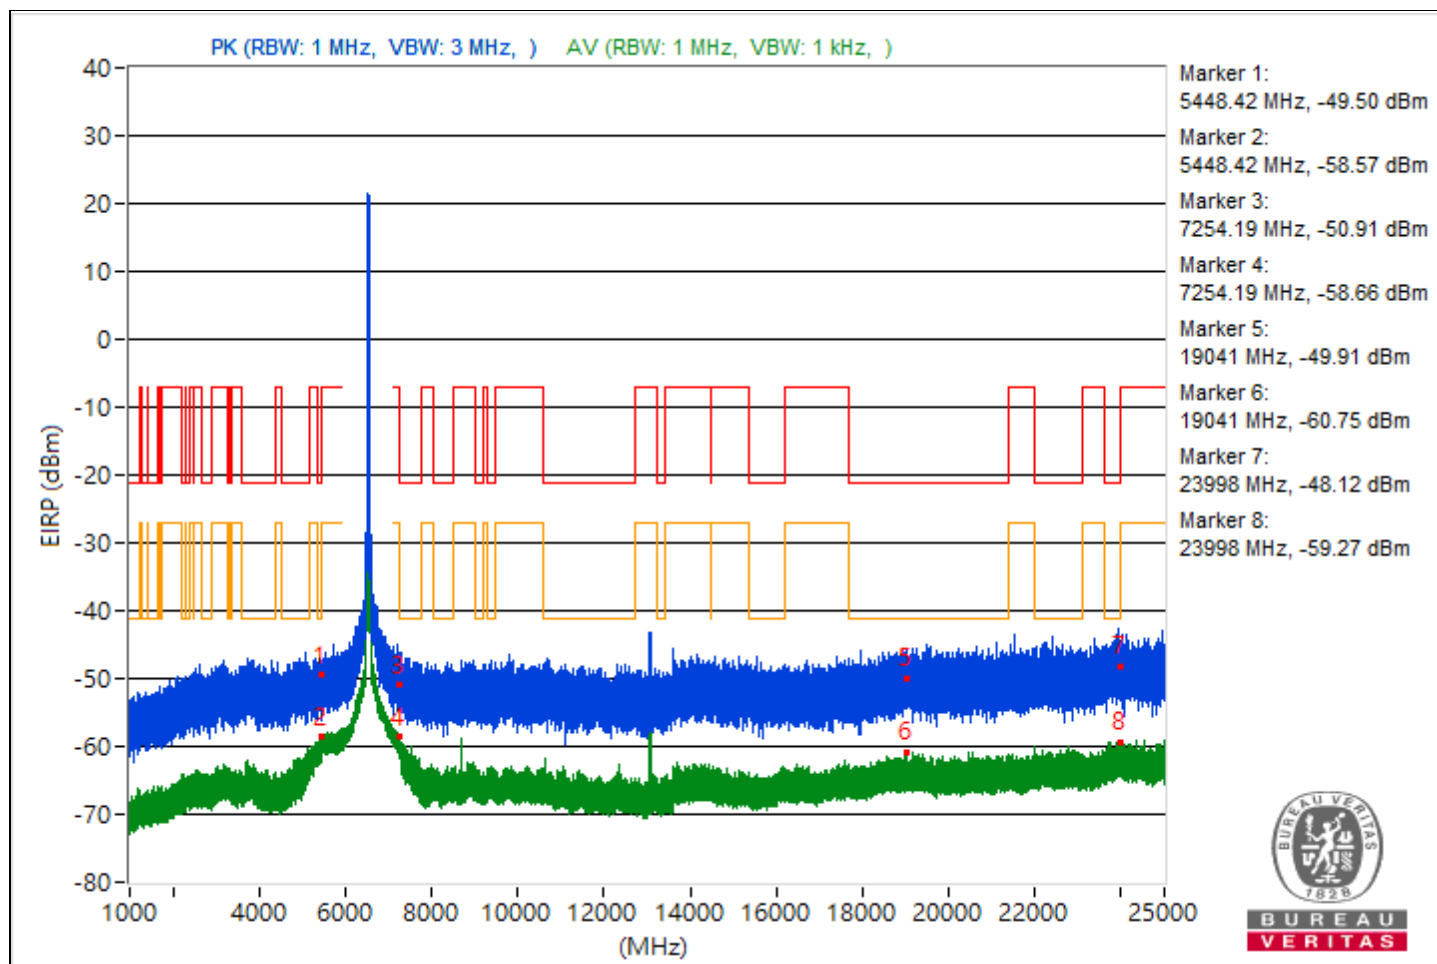


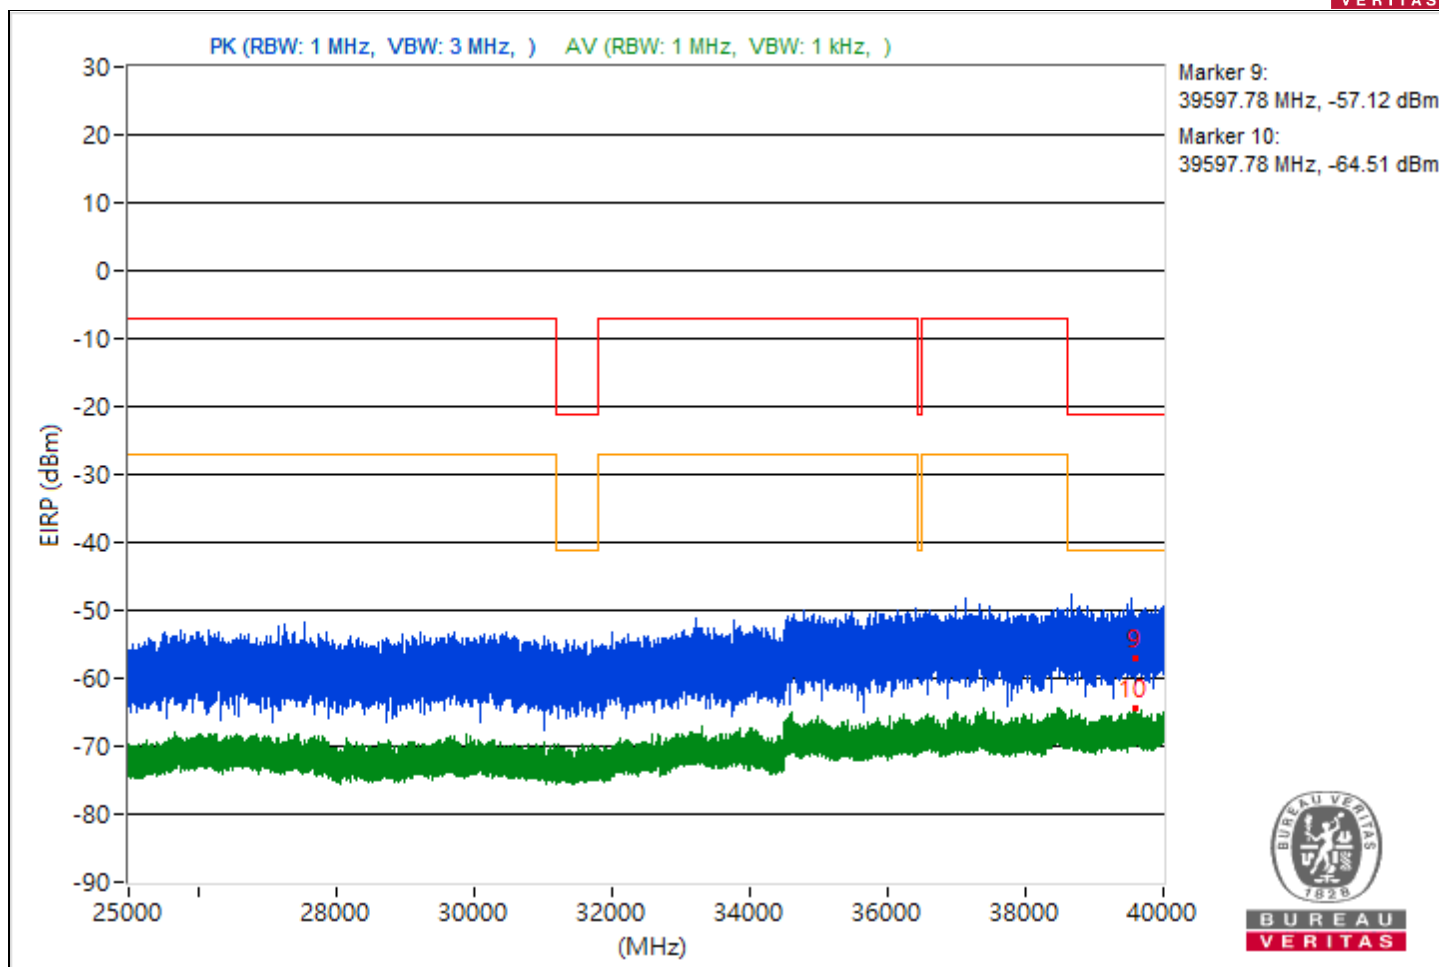


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.13	45.45 PK	74	-28.55	-58.18	8.37	-49.81
2	5450.13	36.08 AV	54	-17.92	-67.55	8.37	-59.18
3	13388.09	49.69 PK	74	-24.31	-53.94	8.37	-45.57
4	13388.09	43.65 AV	54	-10.35	-59.98	8.37	-51.61
5	20084.4	47.74 PK	74	-26.26	-55.89	8.37	-47.52
6	20084.4	37.33 AV	54	-16.67	-66.3	8.37	-57.93
7	23934.1	49.07 PK	74	-24.93	-54.56	8.37	-46.19
8	23934.1	35.87 AV	54	-18.13	-67.76	8.37	-59.39
9	39668.44	41.08 PK	74	-32.92	-62.55	8.37	-54.18
10	39668.44	30.99 AV	54	-23.01	-72.64	8.37	-64.27

Note: Margin value = Emission Level - Limit value

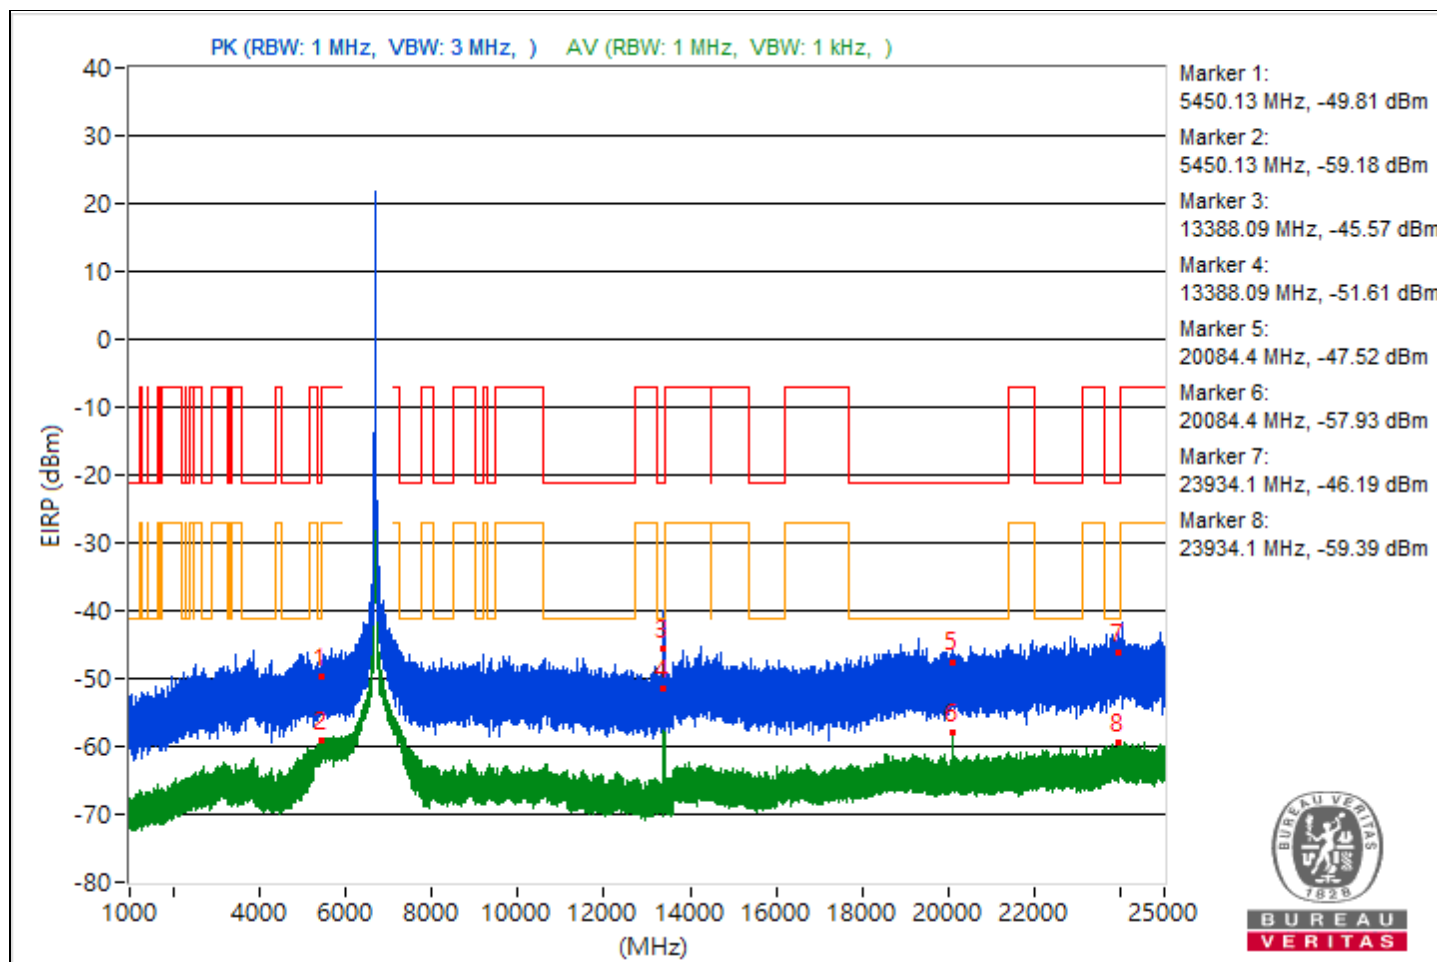


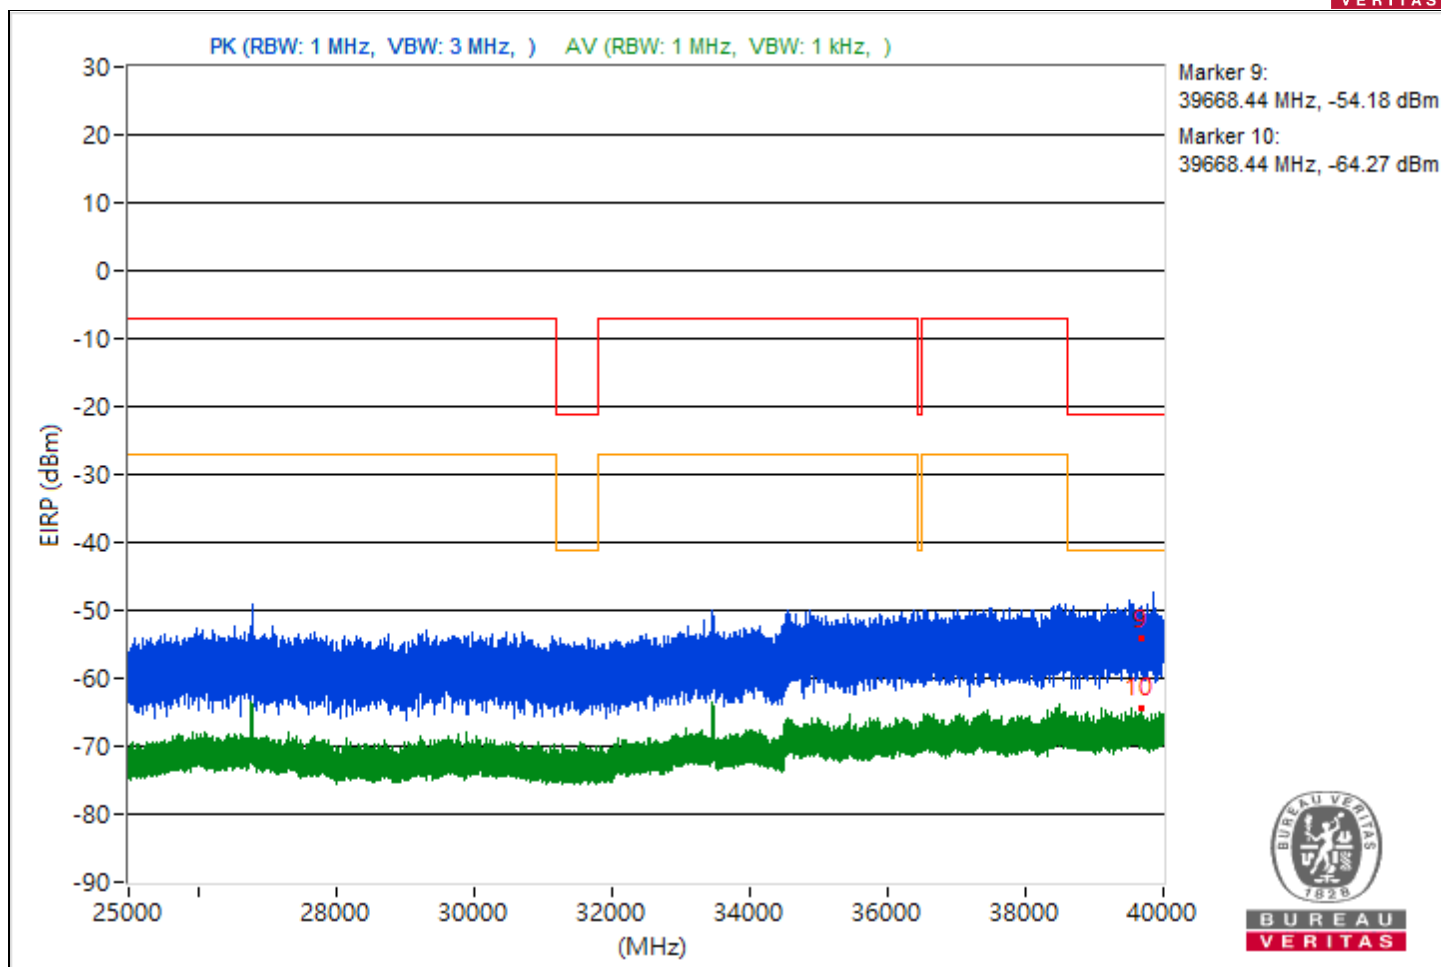


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5434.89	44.17 PK	74	-29.83	-59.46	8.37	-51.09
2	5434.89	35.74 AV	54	-18.26	-67.89	8.37	-59.52
3	7250.07	47.05 PK	74	-26.95	-56.58	8.37	-48.21
4	7250.07	40.03 AV	54	-13.97	-63.6	8.37	-55.23
5	20569.8	45.06 PK	74	-28.94	-58.57	8.37	-50.2
6	20569.8	36.85 AV	54	-17.15	-66.78	8.37	-58.41
7	23731.1	47.58 PK	74	-26.42	-56.05	8.37	-47.68
8	23731.1	36.12 AV	54	-17.88	-67.51	8.37	-59.14
9	39192	40.45 PK	74	-33.55	-63.18	8.37	-54.81
10	39192	30.86 AV	54	-23.14	-72.77	8.37	-64.4

Note: Margin value = Emission Level - Limit value

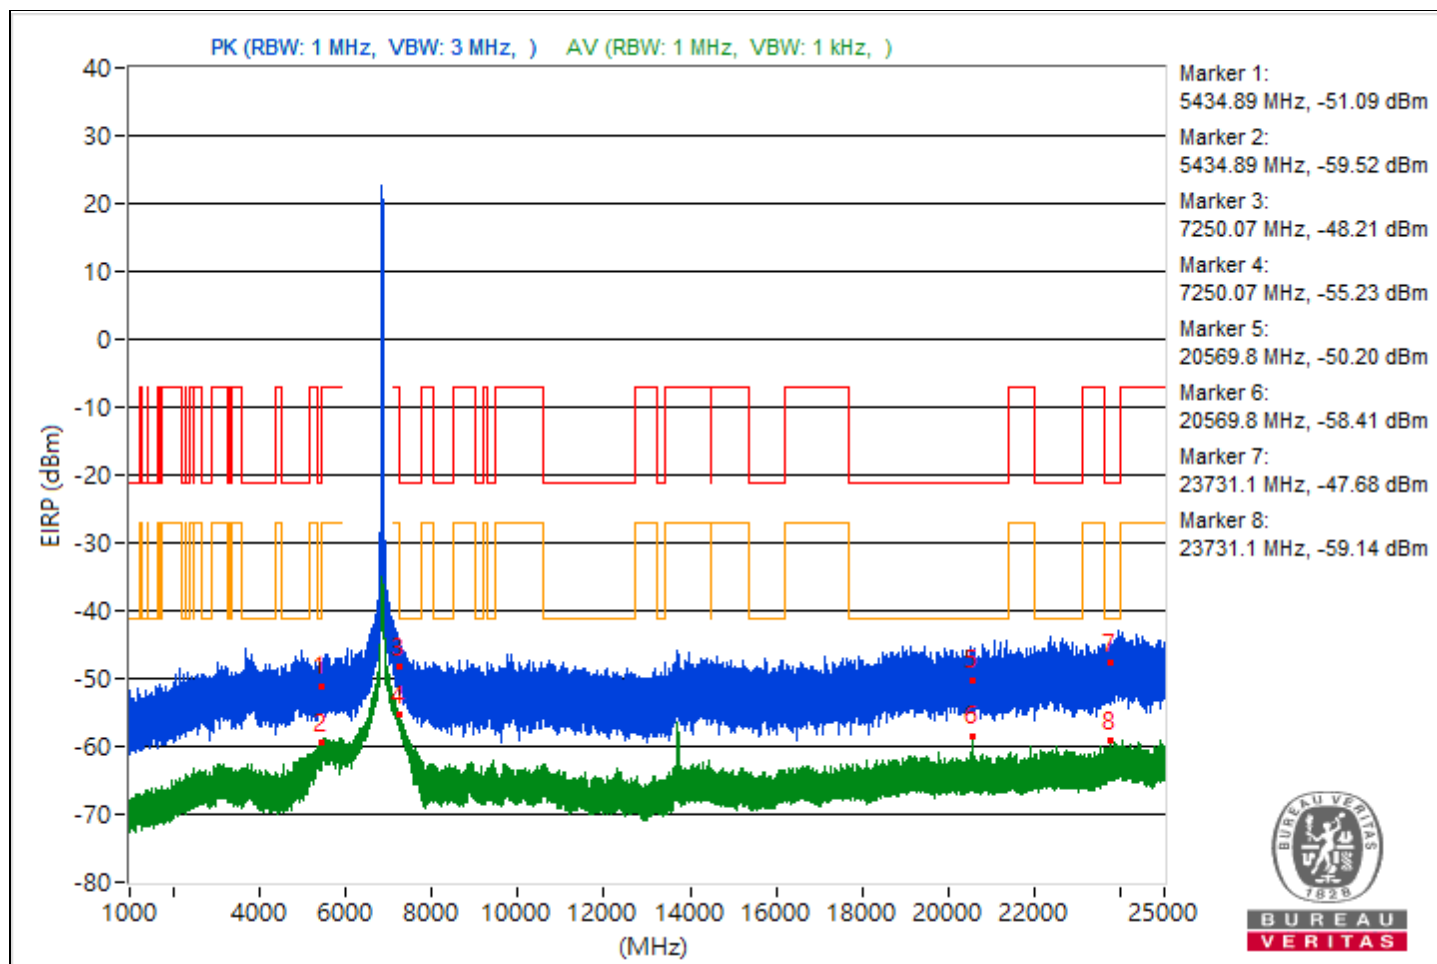


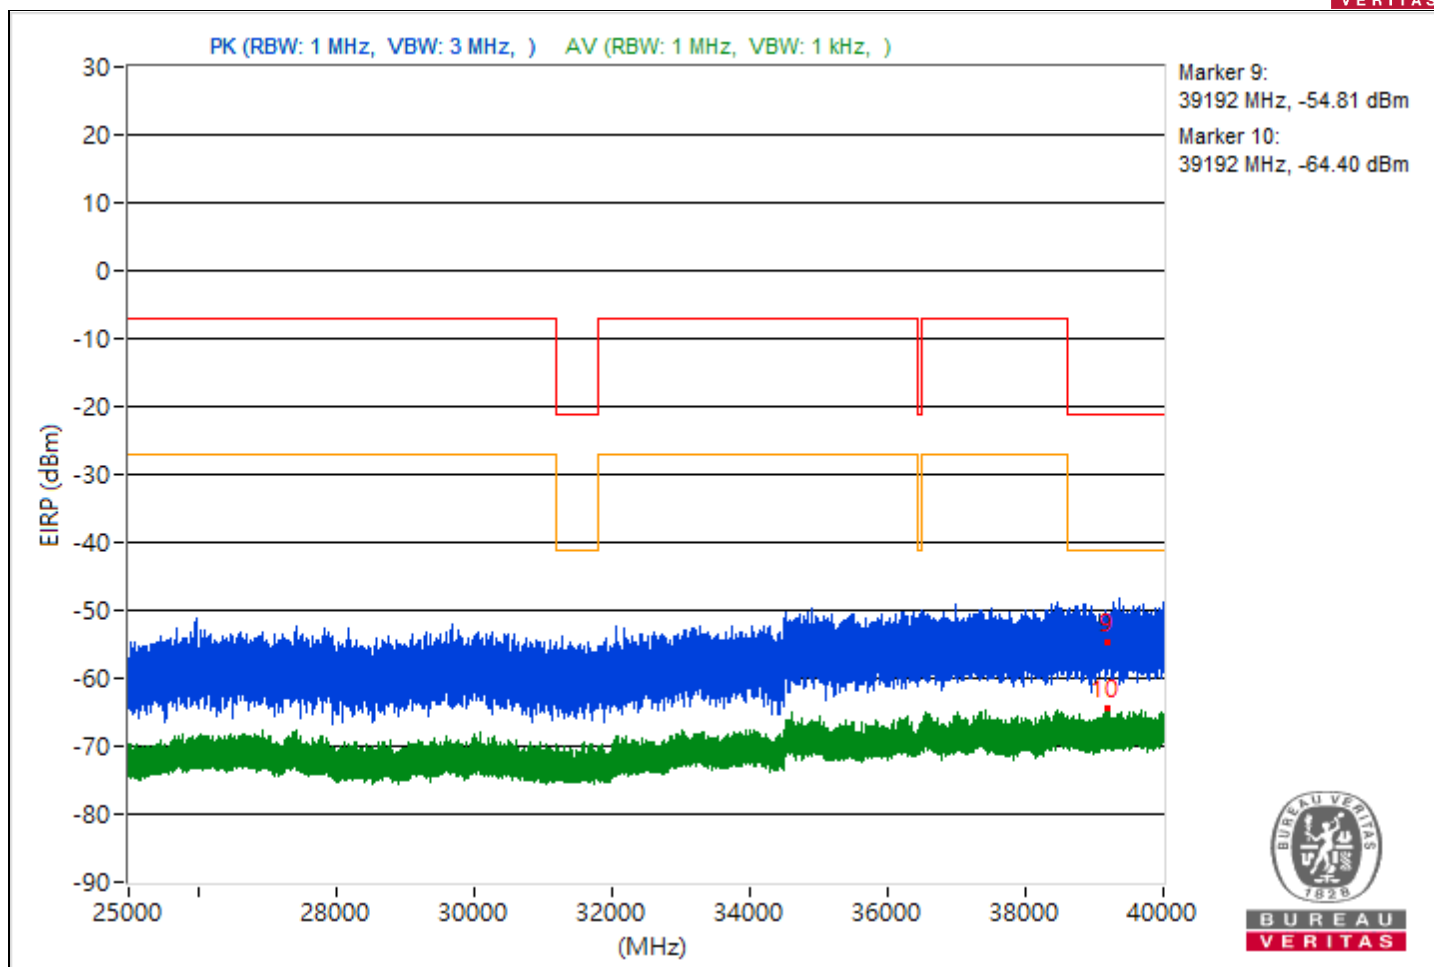


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.27	46.94 PK	74	-27.06	-56.69	8.37	-48.32
2	5455.27	39.95 AV	54	-14.05	-63.68	8.37	-55.31
3	11930.4	48.44 PK	74	-25.56	-55.19	8.37	-46.82
4	11930.4	42.78 AV	54	-11.22	-60.85	8.37	-52.48
5	19303	45.9 PK	74	-28.1	-57.73	8.37	-49.36
6	19303	34.3 AV	54	-19.7	-69.33	8.37	-60.96
7	23954.4	46.77 PK	74	-27.23	-56.86	8.37	-48.49
8	23954.4	36.76 AV	54	-17.24	-66.87	8.37	-58.5
9	39592.8	40.61 PK	74	-33.39	-63.02	8.37	-54.65
10	39592.8	30.93 AV	54	-23.07	-72.7	8.37	-64.33

Note: Margin value = Emission Level - Limit value

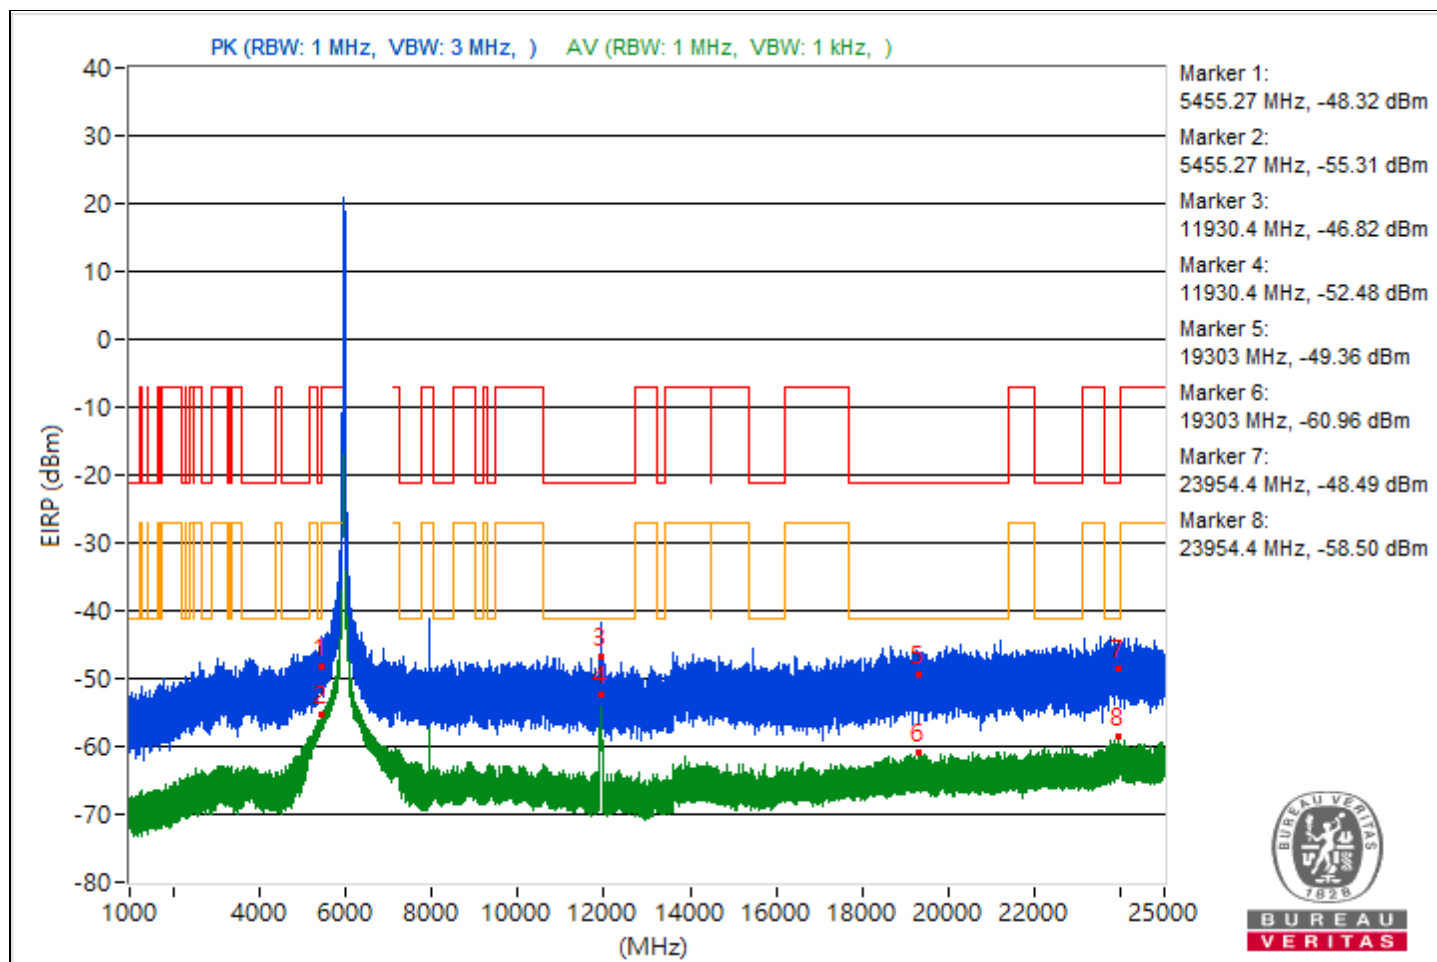


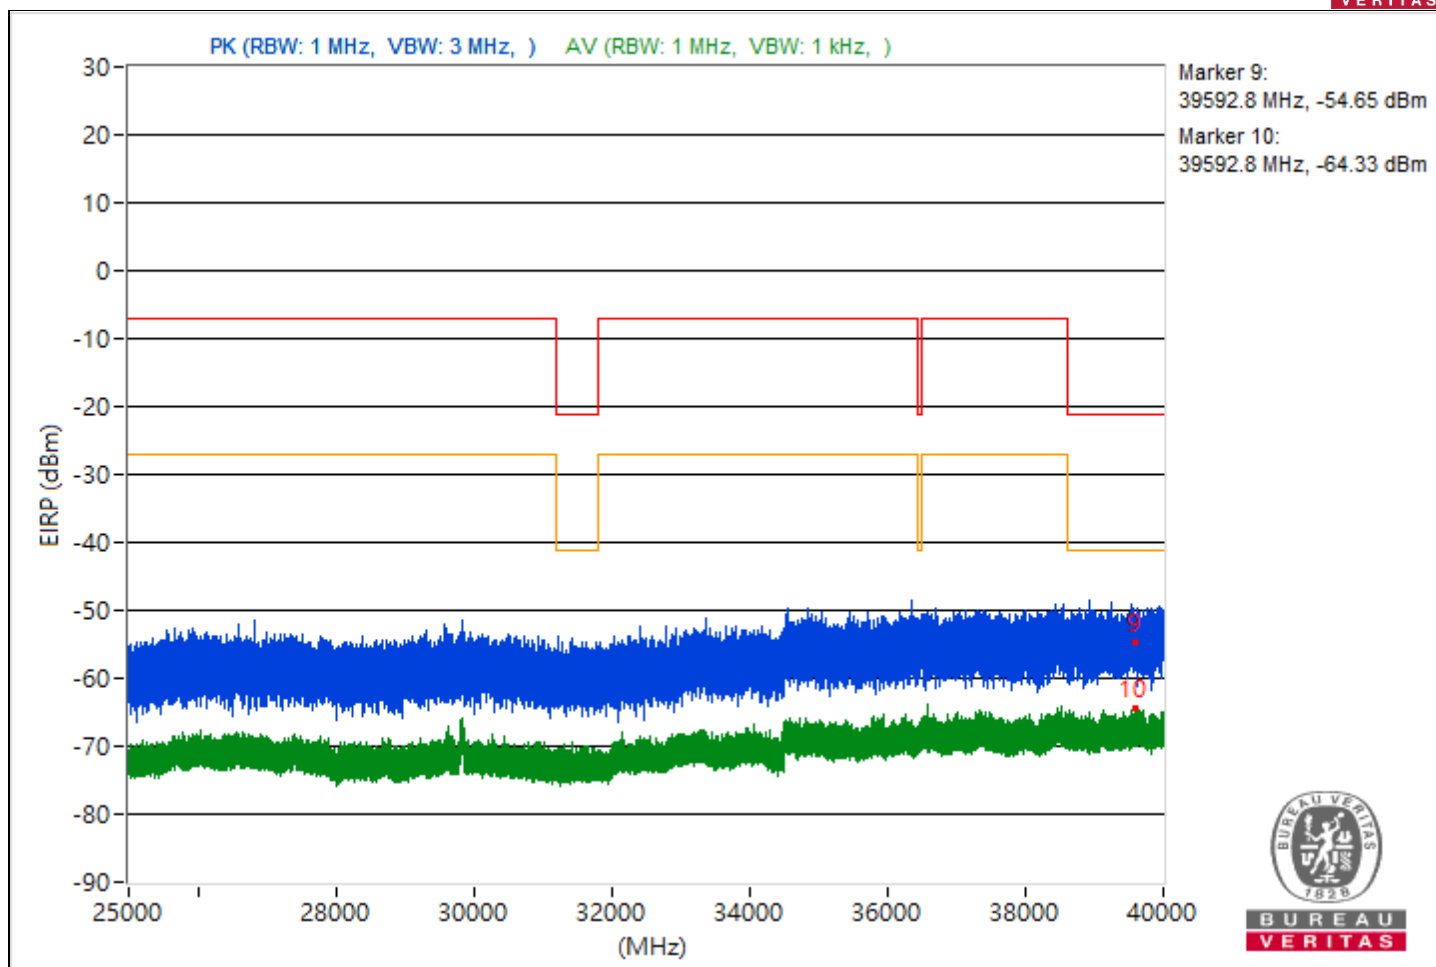


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5444.92	45.16 PK	74	-28.84	-58.47	8.37	-50.1
2	5444.92	38.67 AV	54	-15.33	-64.96	8.37	-56.59
3	8220	50.77 PK	74	-23.23	-52.86	8.37	-44.49
4	8220	48.38 AV	54	-5.62	-55.25	8.37	-46.88
5	20498.5	45.93 PK	74	-28.07	-57.7	8.37	-49.33
6	20498.5	34.91 AV	54	-19.09	-68.72	8.37	-60.35
7	23913.2	48.42 PK	74	-25.58	-55.21	8.37	-46.84
8	23913.2	35.85 AV	54	-18.15	-67.78	8.37	-59.41
9	39096.53	42.15 PK	74	-31.85	-61.48	8.37	-53.11
10	39096.53	30.82 AV	54	-23.18	-72.81	8.37	-64.44

Note: Margin value = Emission Level - Limit value

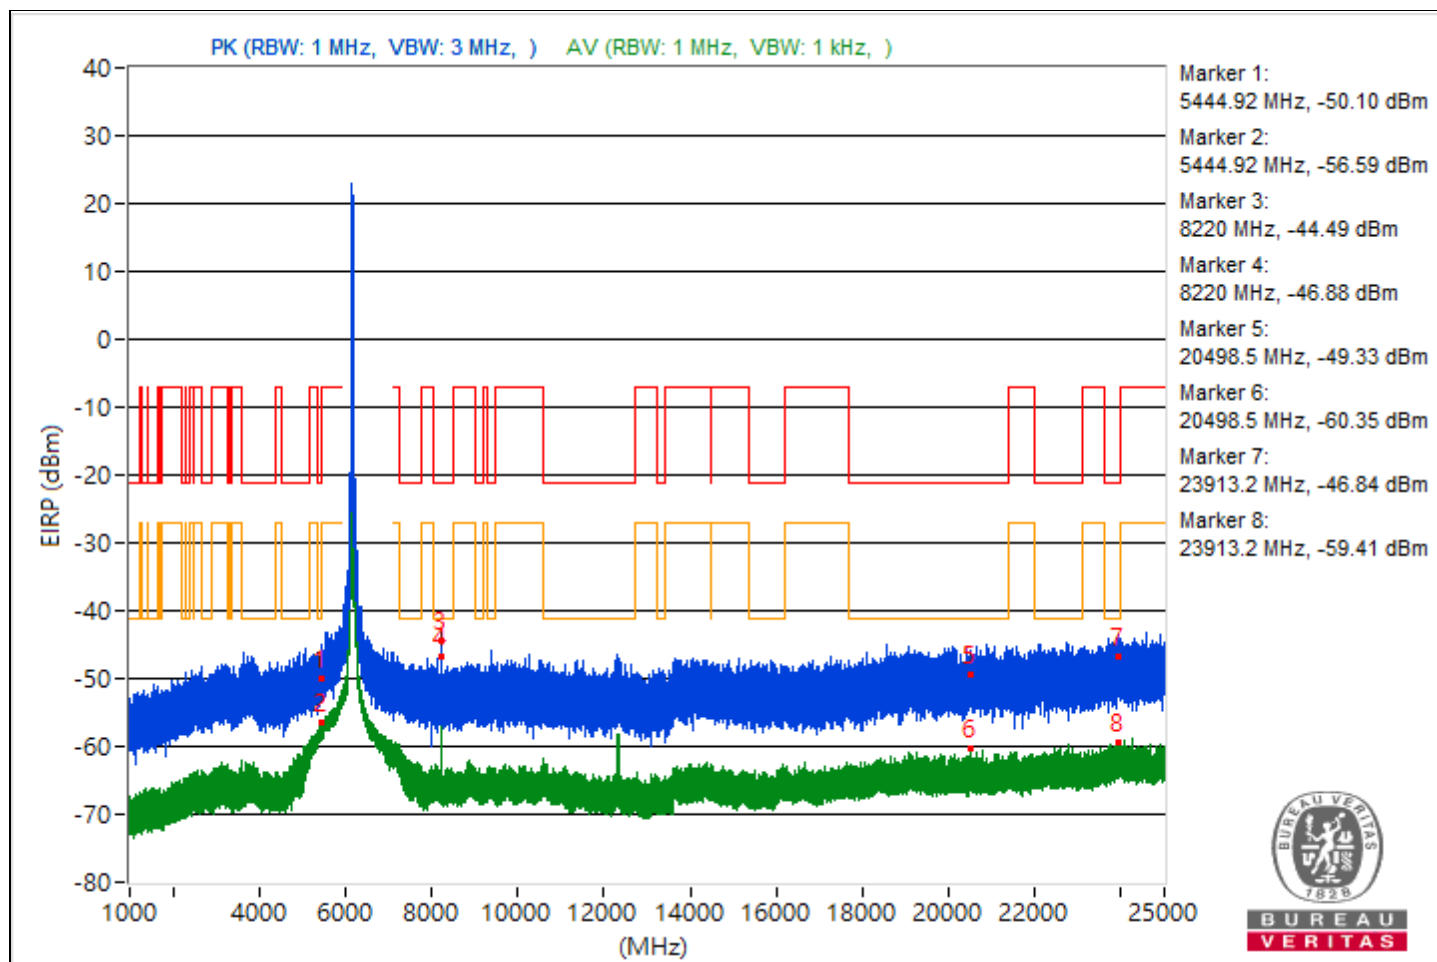


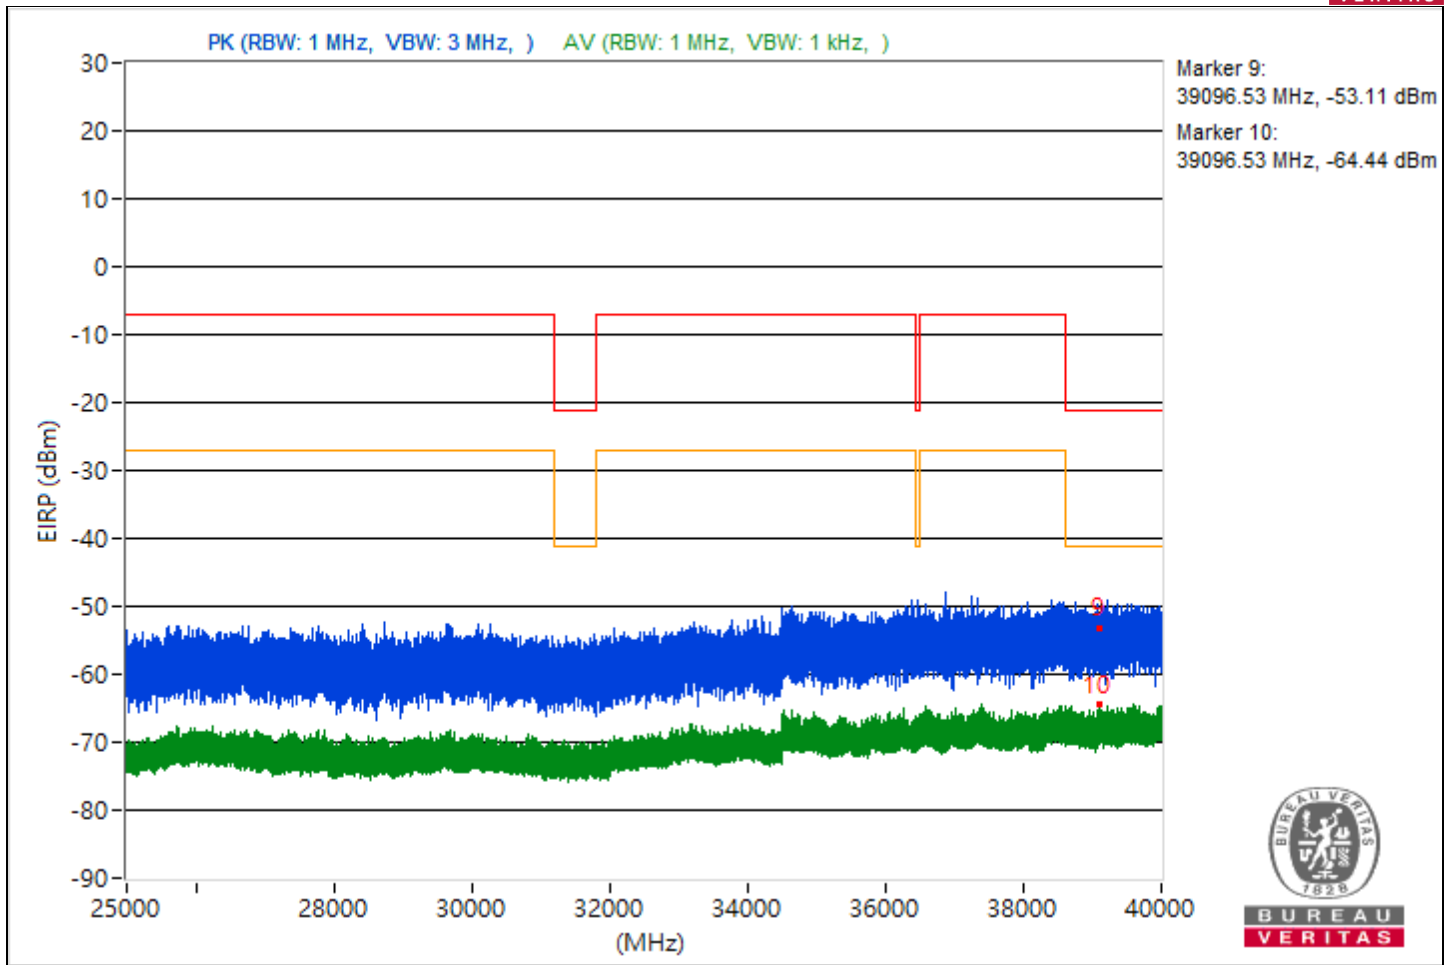


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.12	45.8 PK	74	-28.2	-57.83	8.37	-49.46
2	5456.12	38.05 AV	54	-15.95	-65.58	8.37	-57.21
3	7250.22	44.2 PK	74	-29.8	-59.43	8.37	-51.06
4	7250.22	36.37 AV	54	-17.63	-67.26	8.37	-58.89
5	19033.2	44.44 PK	74	-29.56	-59.19	8.37	-50.82
6	19033.2	35 AV	54	-19	-68.63	8.37	-60.26
7	23975.3	46.61 PK	74	-27.39	-57.02	8.37	-48.65
8	23975.3	36.55 AV	54	-17.45	-67.08	8.37	-58.71
9	39586.31	44.24 PK	74	-29.76	-59.39	8.37	-51.02
10	39586.31	30.89 AV	54	-23.11	-72.74	8.37	-64.37

Note: Margin value = Emission Level - Limit value

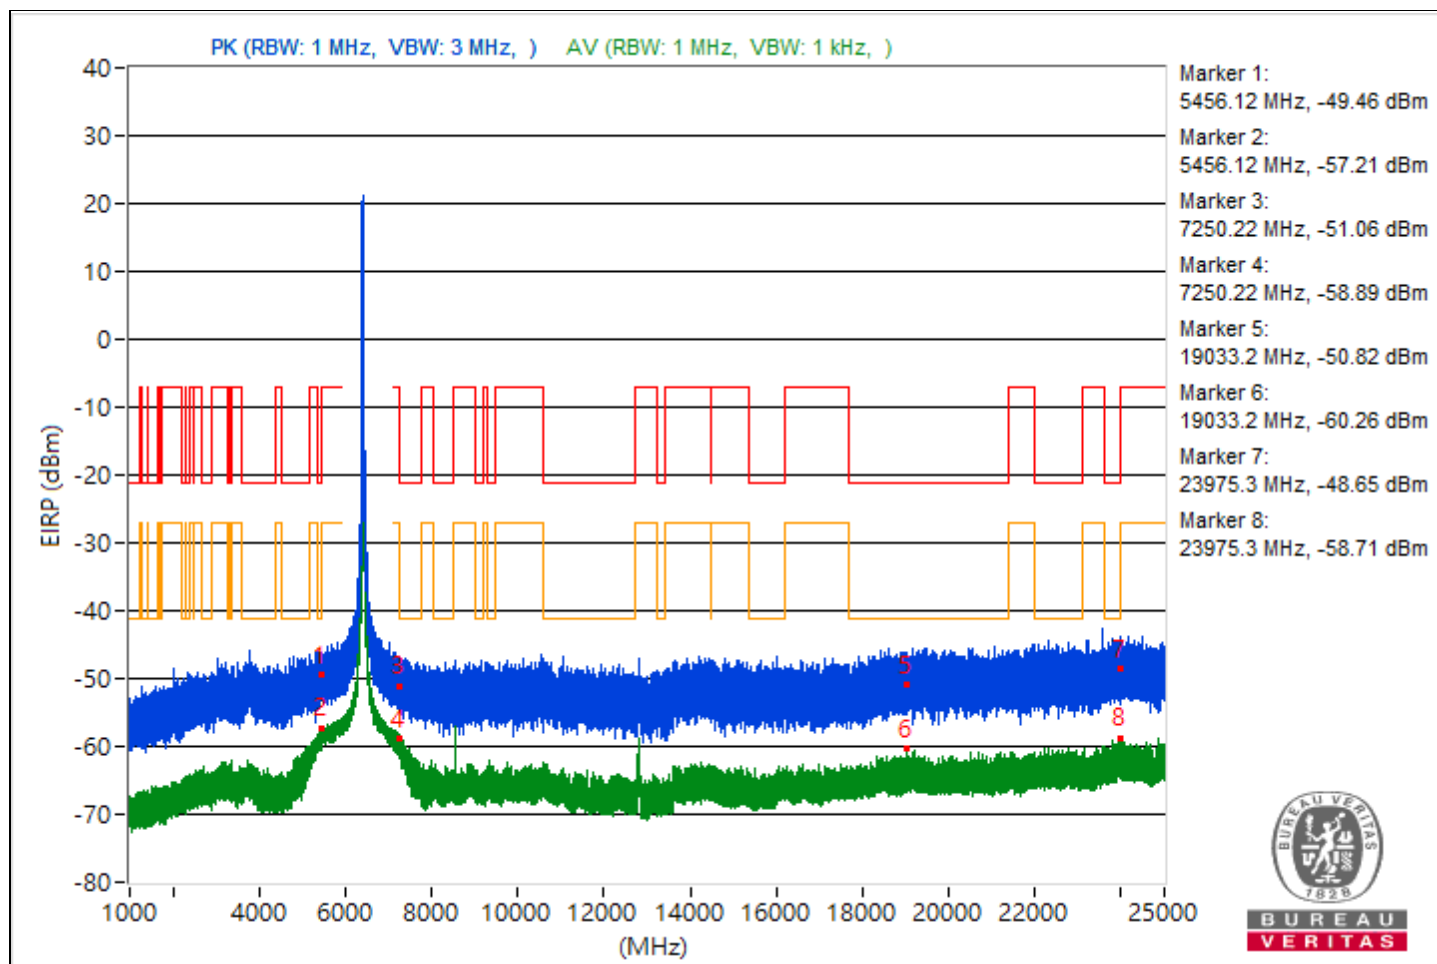


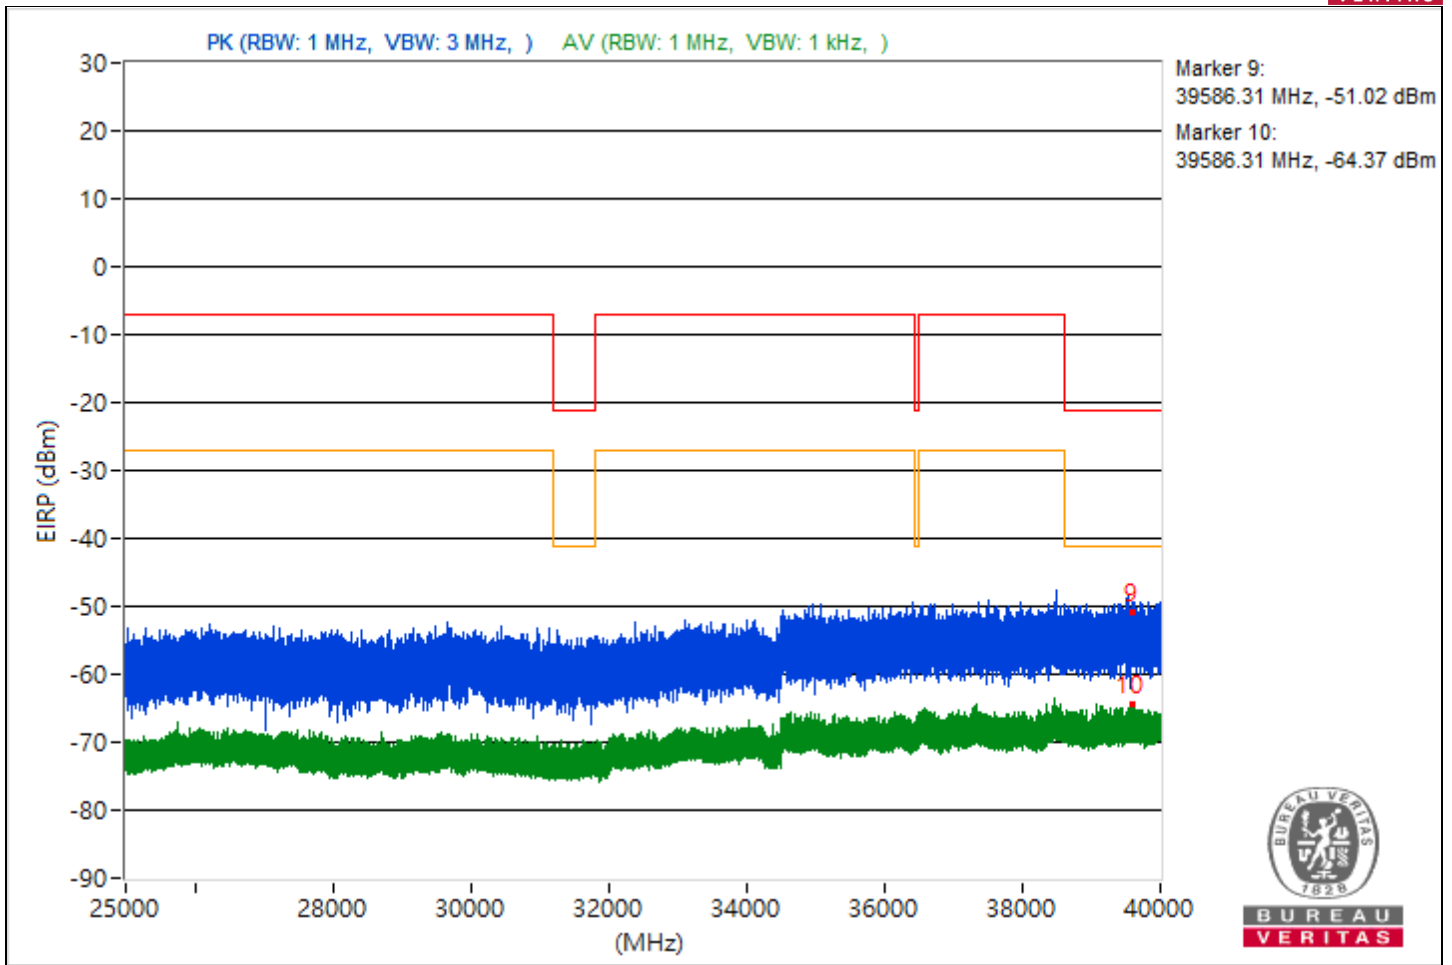


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.39	45.67 PK	74	-28.33	-57.96	8.37	-49.59
2	5459.39	36.54 AV	54	-17.46	-67.09	8.37	-58.72
3	7254.66	44.45 PK	74	-29.55	-59.18	8.37	-50.81
4	7254.66	36.51 AV	54	-17.49	-67.12	8.37	-58.75
5	21165.5	44.8 PK	74	-29.2	-58.83	8.37	-50.46
6	21165.5	34.74 AV	54	-19.26	-68.89	8.37	-60.52
7	23799.9	47.54 PK	74	-26.46	-56.09	8.37	-47.72
8	23799.9	35.83 AV	54	-18.17	-67.8	8.37	-59.43
9	39571.47	38.31 PK	74	-35.69	-65.32	8.37	-56.95
10	39571.47	30.82 AV	54	-23.18	-72.81	8.37	-64.44

Note: Margin value = Emission Level - Limit value

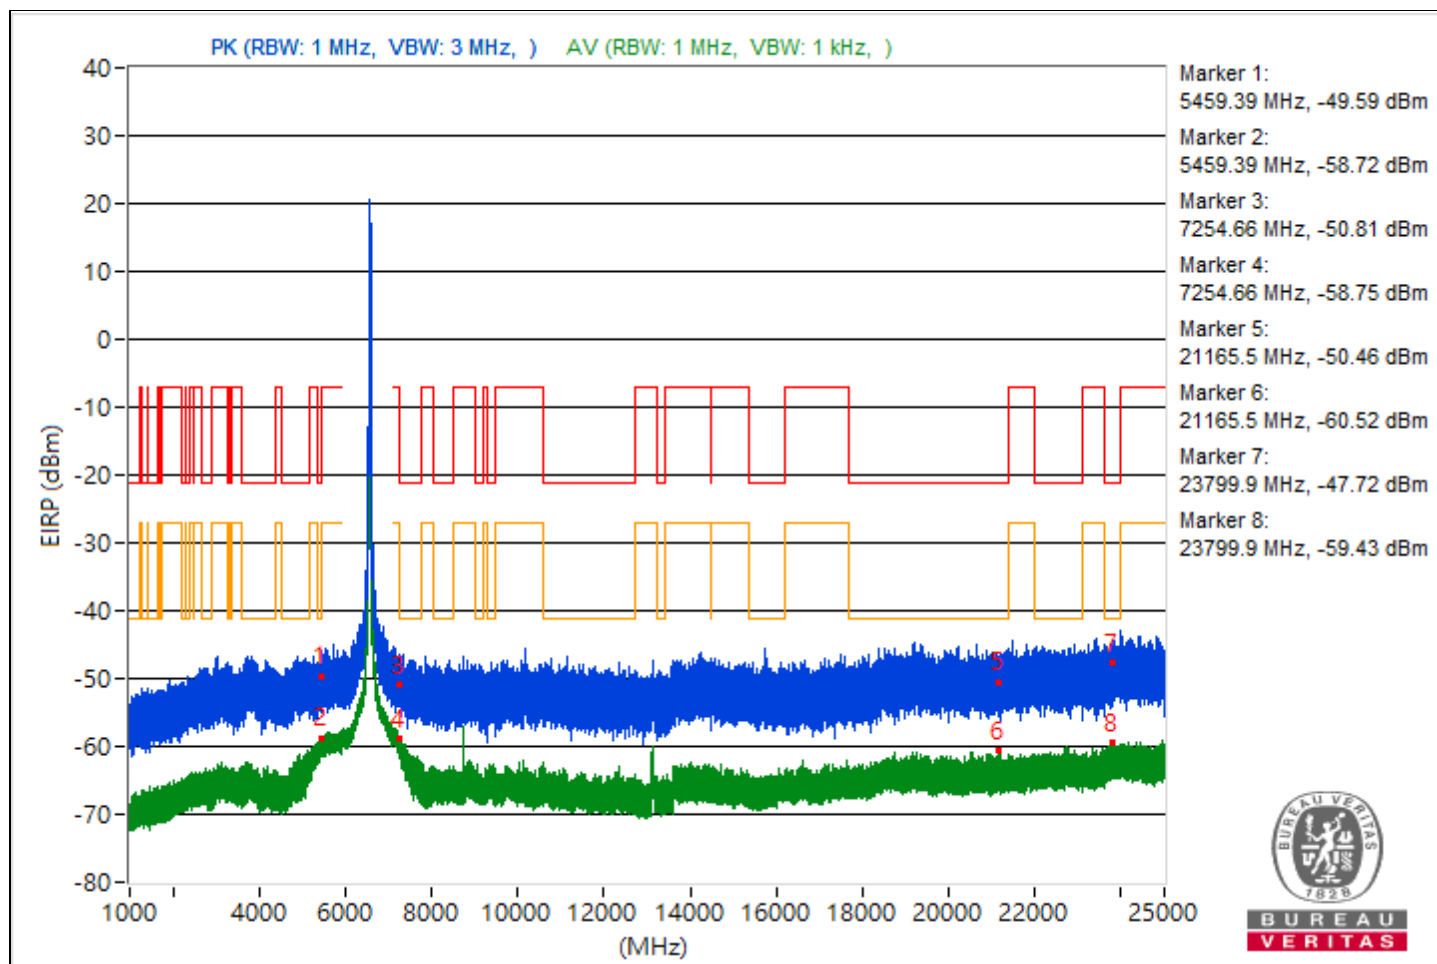


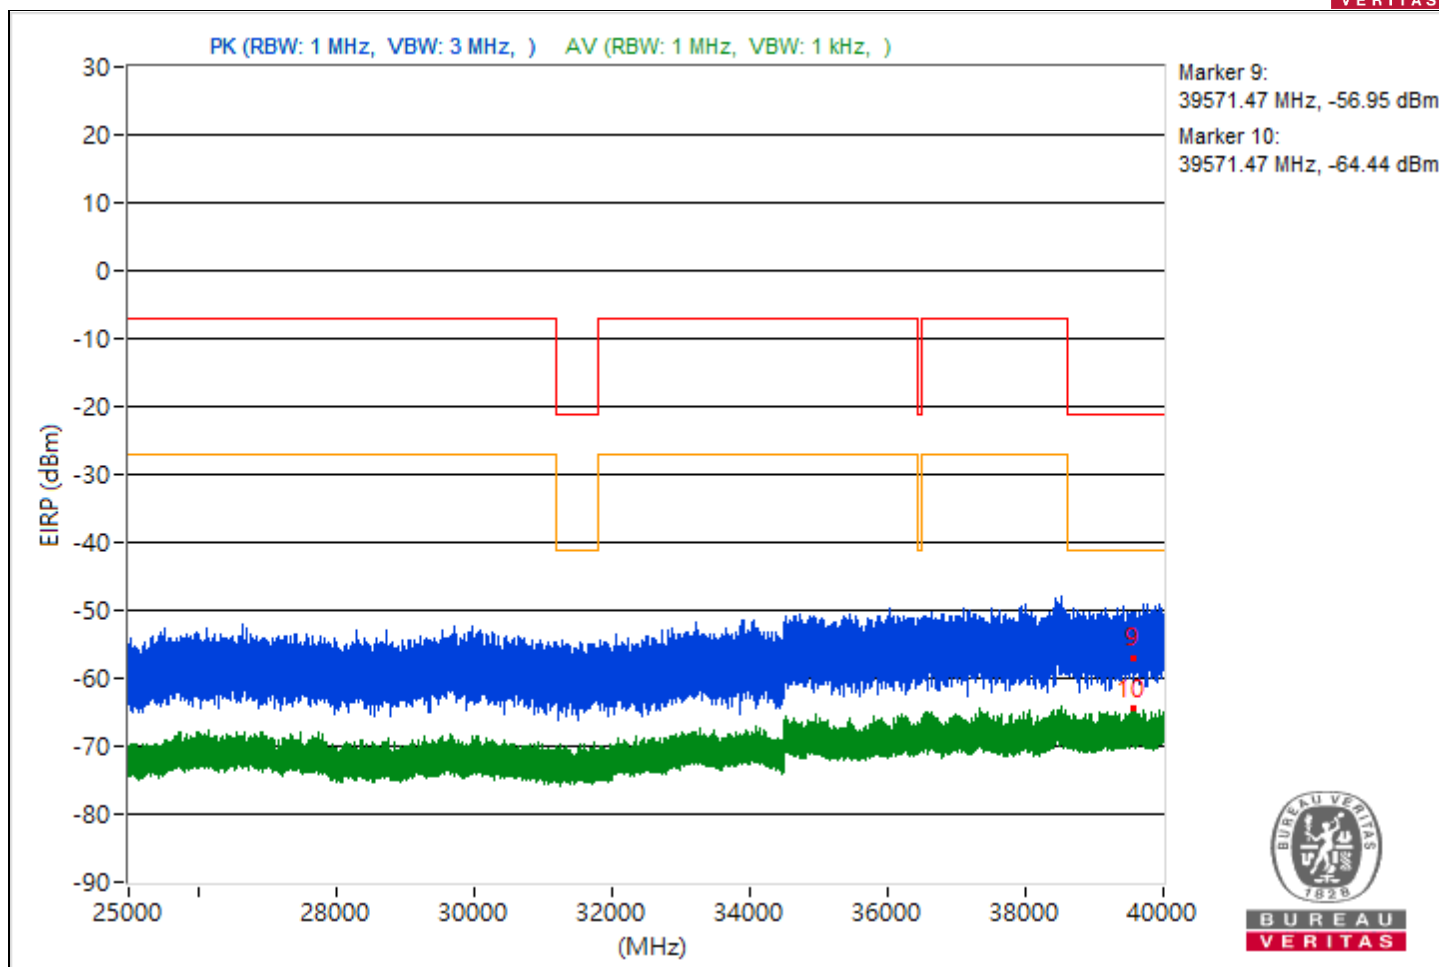


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.34	43.22 PK	74	-30.78	-60.41	8.37	-52.04
2	5455.34	36.34 AV	54	-17.66	-67.29	8.37	-58.92
3	7255.2	46.76 PK	74	-27.24	-56.87	8.37	-48.5
4	7255.2	38.57 AV	54	-15.43	-65.06	8.37	-56.69
5	19041.2	43.51 PK	74	-30.49	-60.12	8.37	-51.75
6	19041.2	35.01 AV	54	-18.99	-68.62	8.37	-60.25
7	23959	45.05 PK	74	-28.95	-58.58	8.37	-50.21
8	23959	35.97 AV	54	-18.03	-67.66	8.37	-59.29
9	39391.2	39.73 PK	74	-34.27	-63.9	8.37	-55.53
10	39391.2	30.97 AV	54	-23.03	-72.66	8.37	-64.29

Note: Margin value = Emission Level - Limit value

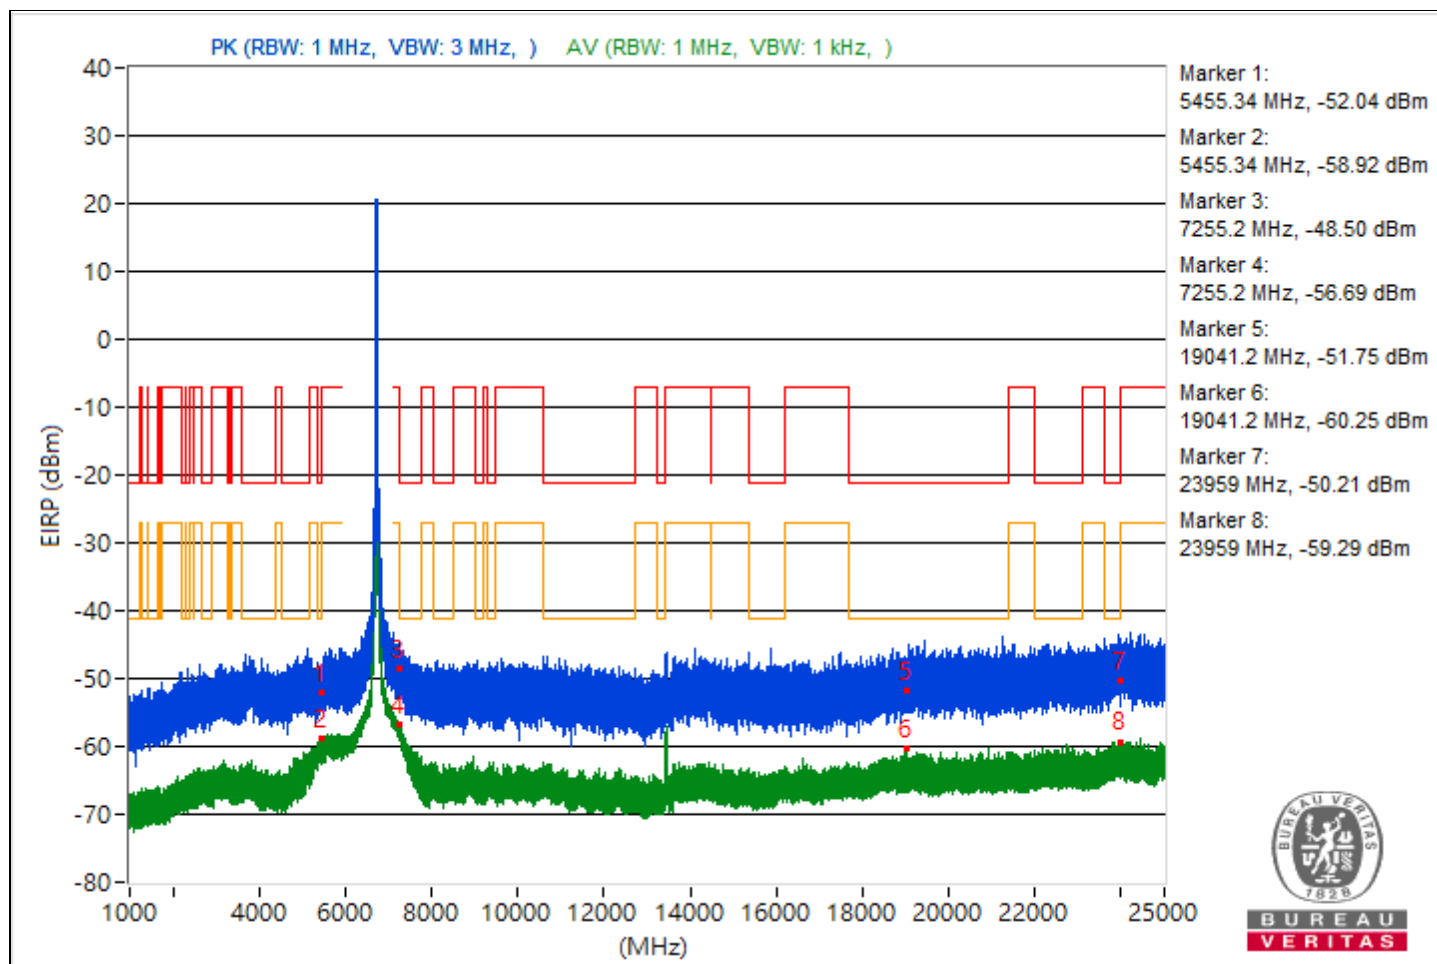


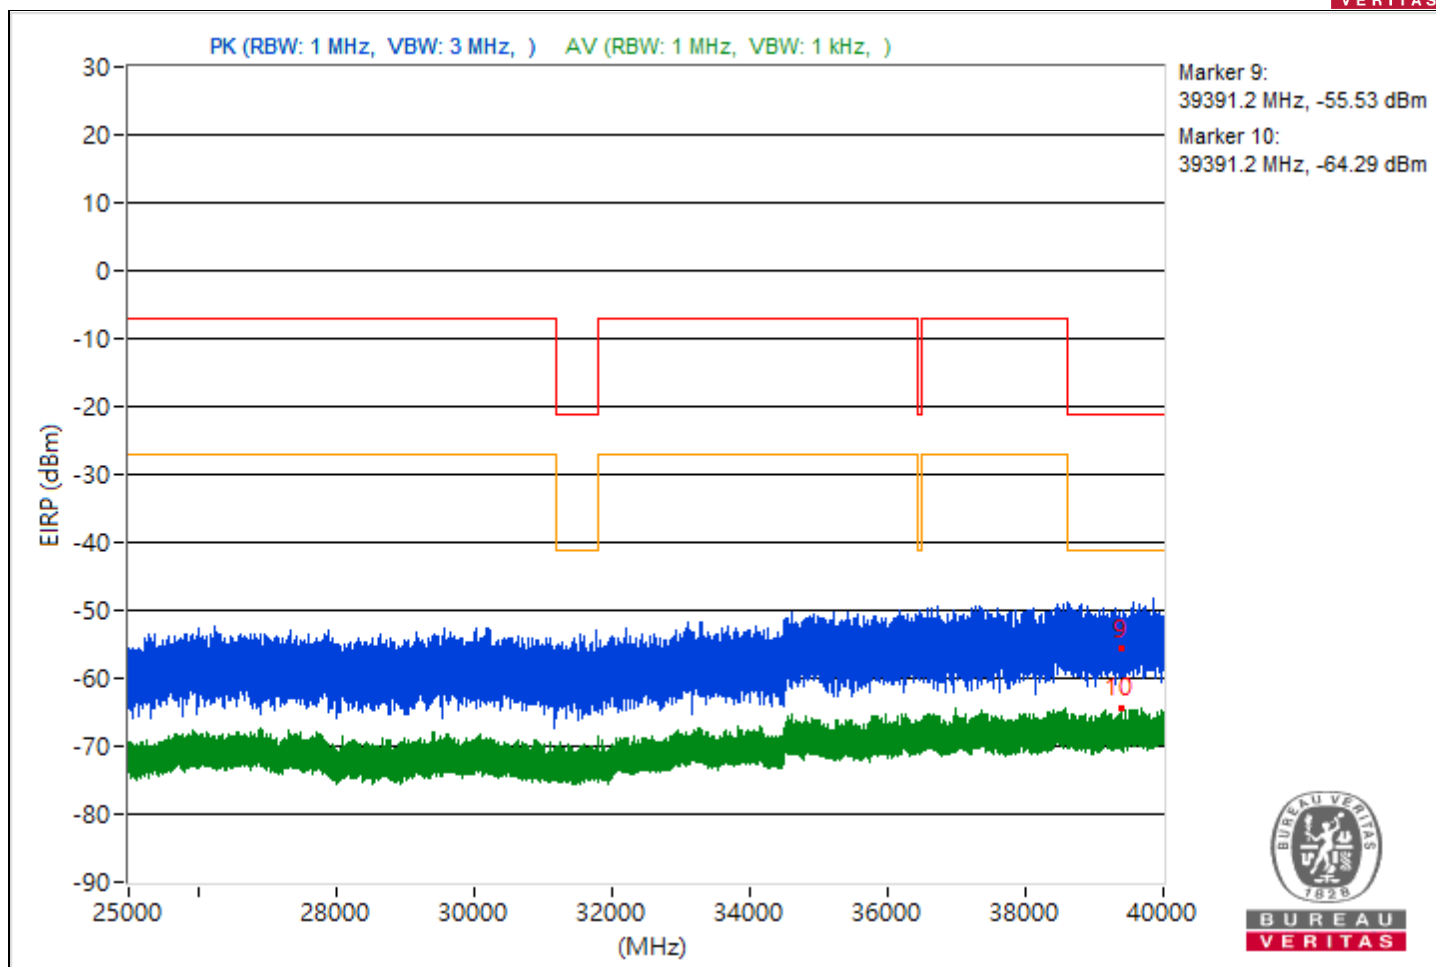


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.09	46.13 PK	74	-27.87	-57.5	8.37	-49.13
2	5453.09	35.73 AV	54	-18.27	-67.9	8.37	-59.53
3	7253.49	44.2 PK	74	-29.8	-59.43	8.37	-51.06
4	7253.49	39.63 AV	54	-14.37	-64	8.37	-55.63
5	20527.6	46.95 PK	74	-27.05	-56.68	8.37	-48.31
6	20527.6	34.84 AV	54	-19.16	-68.79	8.37	-60.42
7	23981.1	43.4 PK	74	-30.6	-60.23	8.37	-51.86
8	23981.1	36.1 AV	54	-17.9	-67.53	8.37	-59.16
9	39652.98	38.92 PK	74	-35.08	-64.71	8.37	-56.34
10	39652.98	30.64 AV	54	-23.36	-72.99	8.37	-64.62

Note: Margin value = Emission Level - Limit value

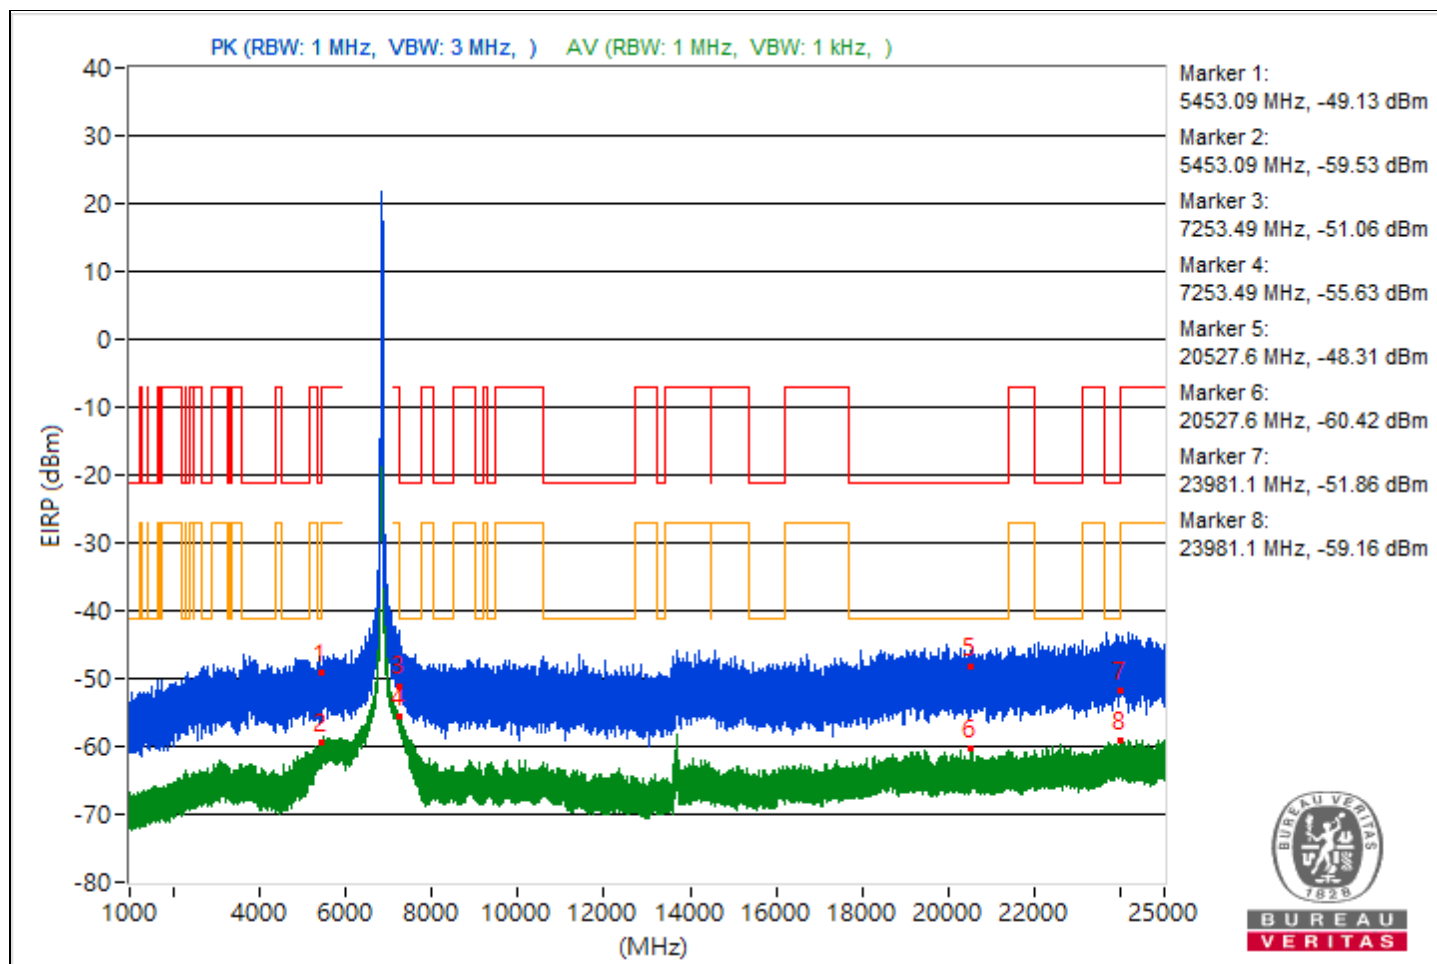


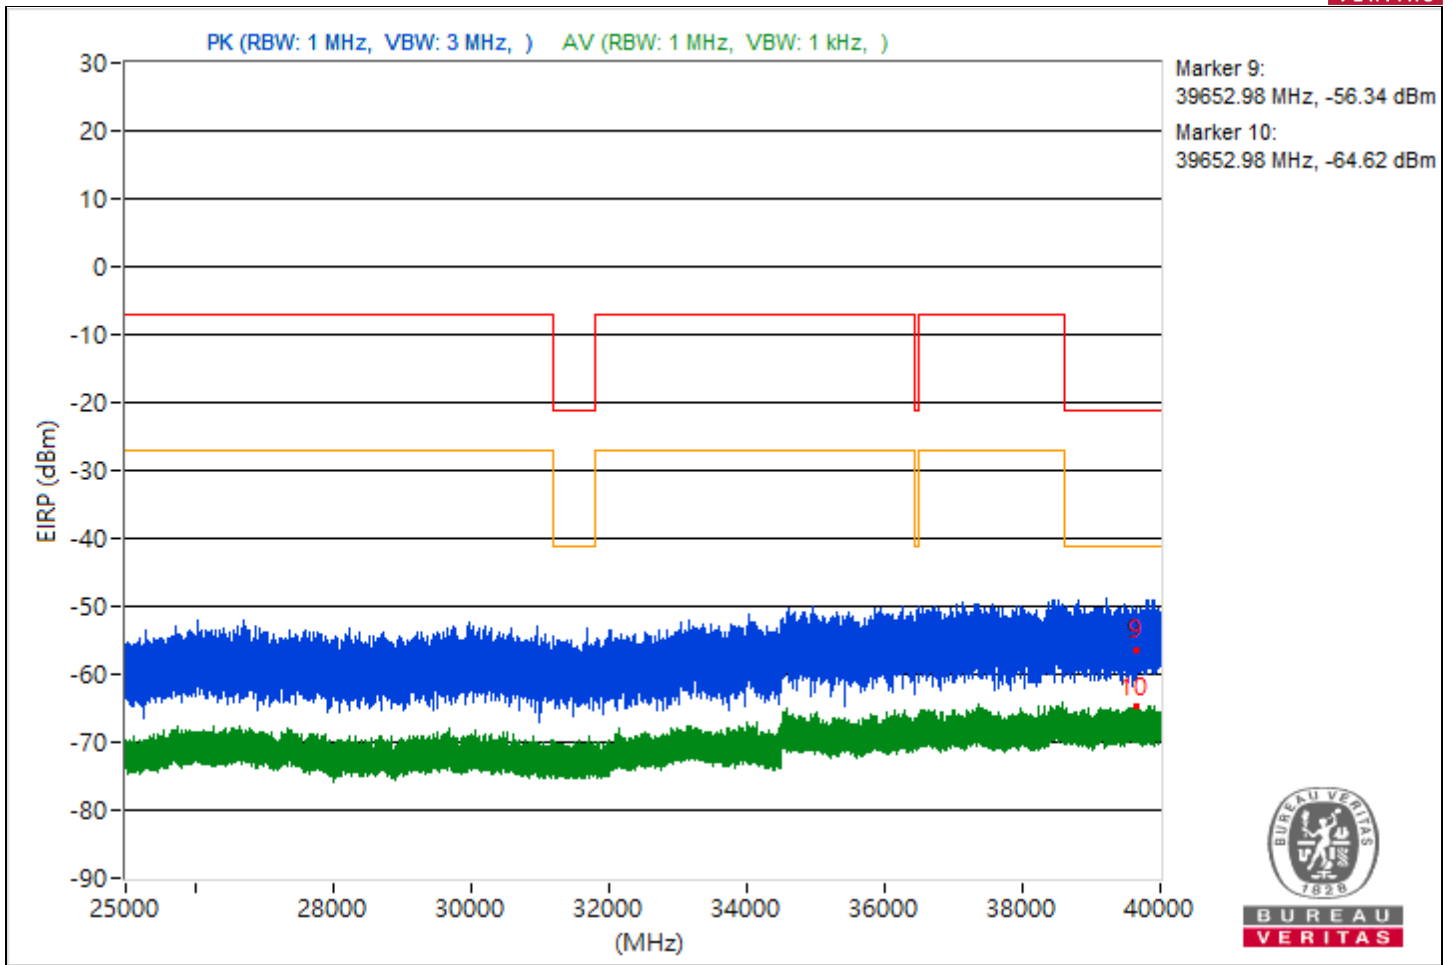


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.71	46.53 PK	74	-27.47	-57.1	8.37	-48.73
2	5453.71	40.01 AV	54	-13.99	-63.62	8.37	-55.25
3	11971.38	45.65 PK	74	-28.35	-57.98	8.37	-49.61
4	11971.38	39.85 AV	54	-14.15	-63.78	8.37	-55.41
5	19144.2	43.71 PK	74	-30.29	-59.92	8.37	-51.55
6	19144.2	34.68 AV	54	-19.32	-68.95	8.37	-60.58
7	23973.4	45.75 PK	74	-28.25	-57.88	8.37	-49.51
8	23973.4	36.27 AV	54	-17.73	-67.36	8.37	-58.99
9	39834.22	38.01 PK	74	-35.99	-65.62	8.37	-57.25
10	39834.22	30.46 AV	54	-23.54	-73.17	8.37	-64.8

Note: Margin value = Emission Level - Limit value

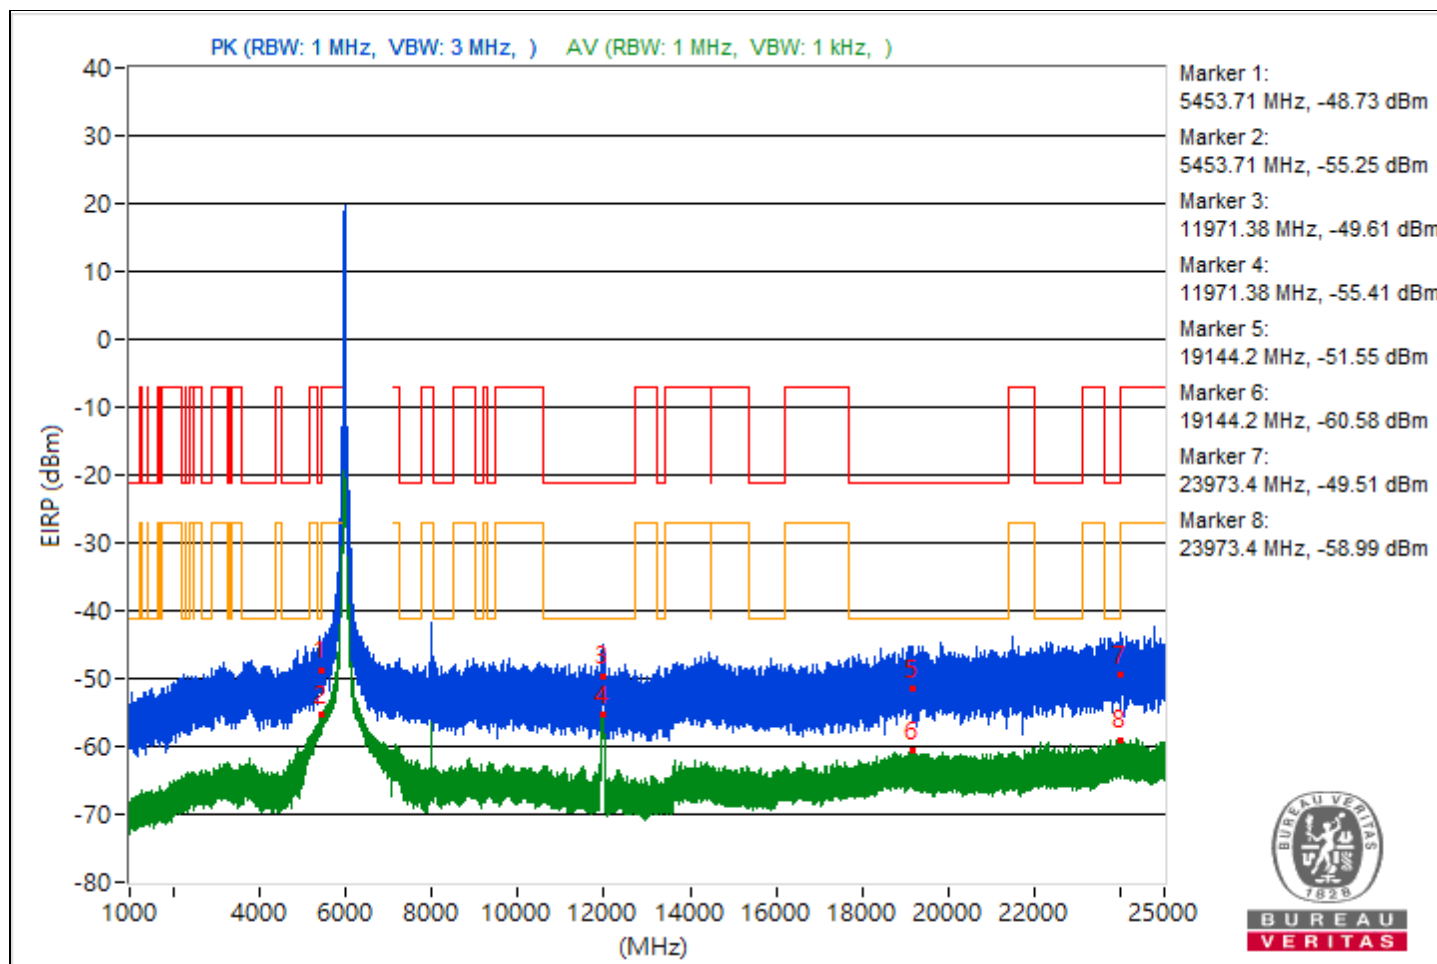


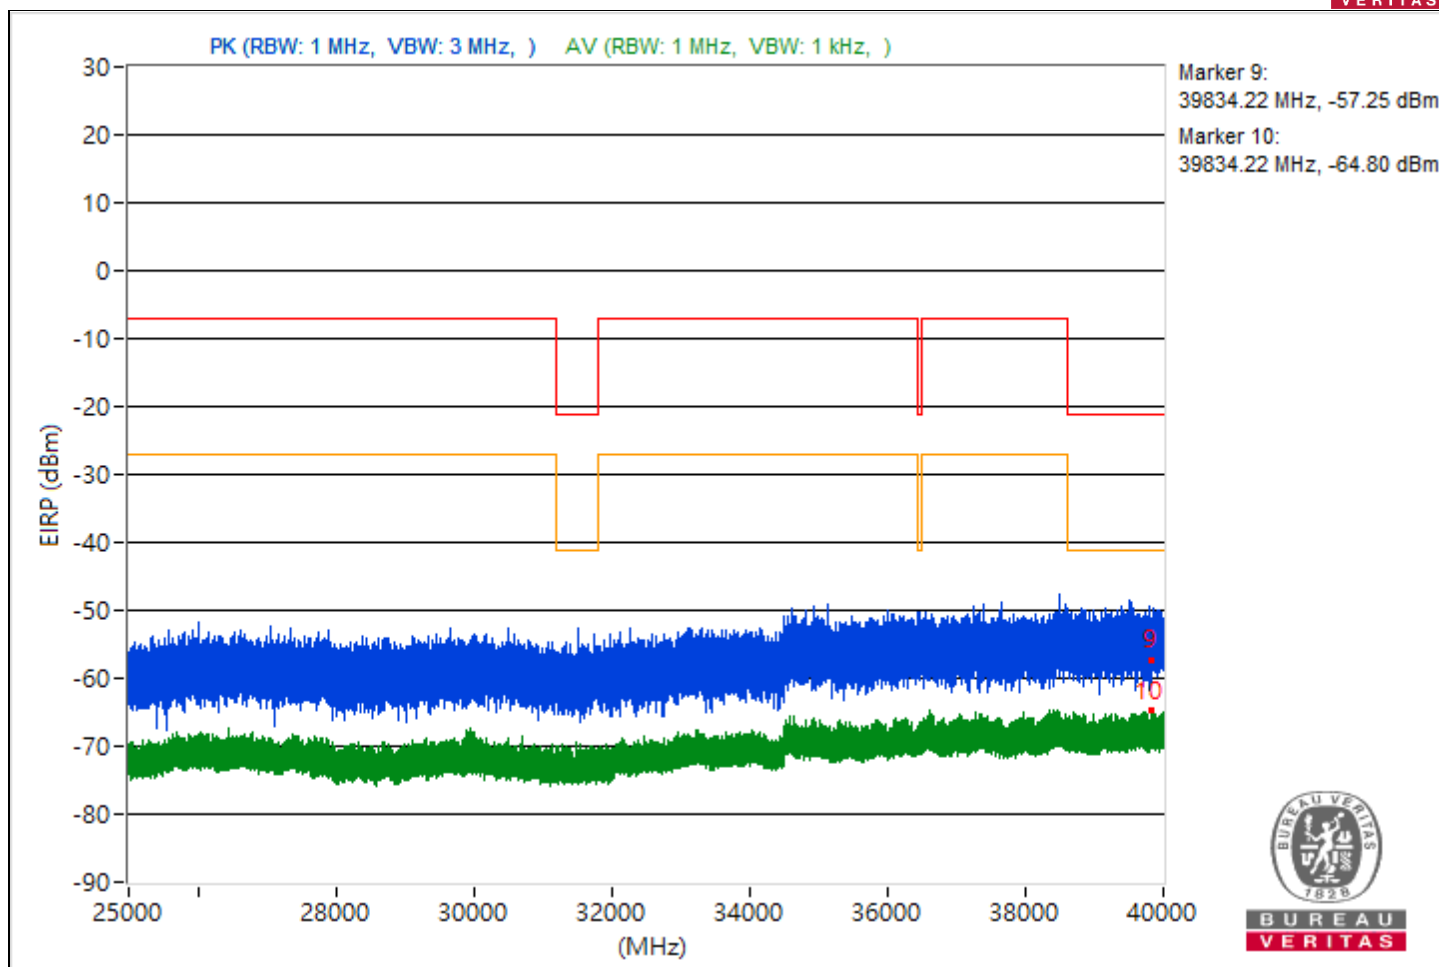


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.47	43.98 PK	74	-30.02	-59.65	8.37	-51.28
2	5459.47	38.8 AV	54	-15.2	-64.83	8.37	-56.46
3	8193.33	52.07 PK	74	-21.93	-51.56	8.37	-43.19
4	8193.33	49.65 AV	54	-4.35	-53.98	8.37	-45.61
5	19078.2	44.71 PK	74	-29.29	-58.92	8.37	-50.55
6	19078.2	34.78 AV	54	-19.22	-68.85	8.37	-60.48
7	23937	47.52 PK	74	-26.48	-56.11	8.37	-47.74
8	23937	36.24 AV	54	-17.76	-67.39	8.37	-59.02
9	39980.89	41.15 PK	74	-32.85	-62.48	8.37	-54.11
10	39980.89	31.23 AV	54	-22.77	-72.4	8.37	-64.03

Note: Margin value = Emission Level - Limit value

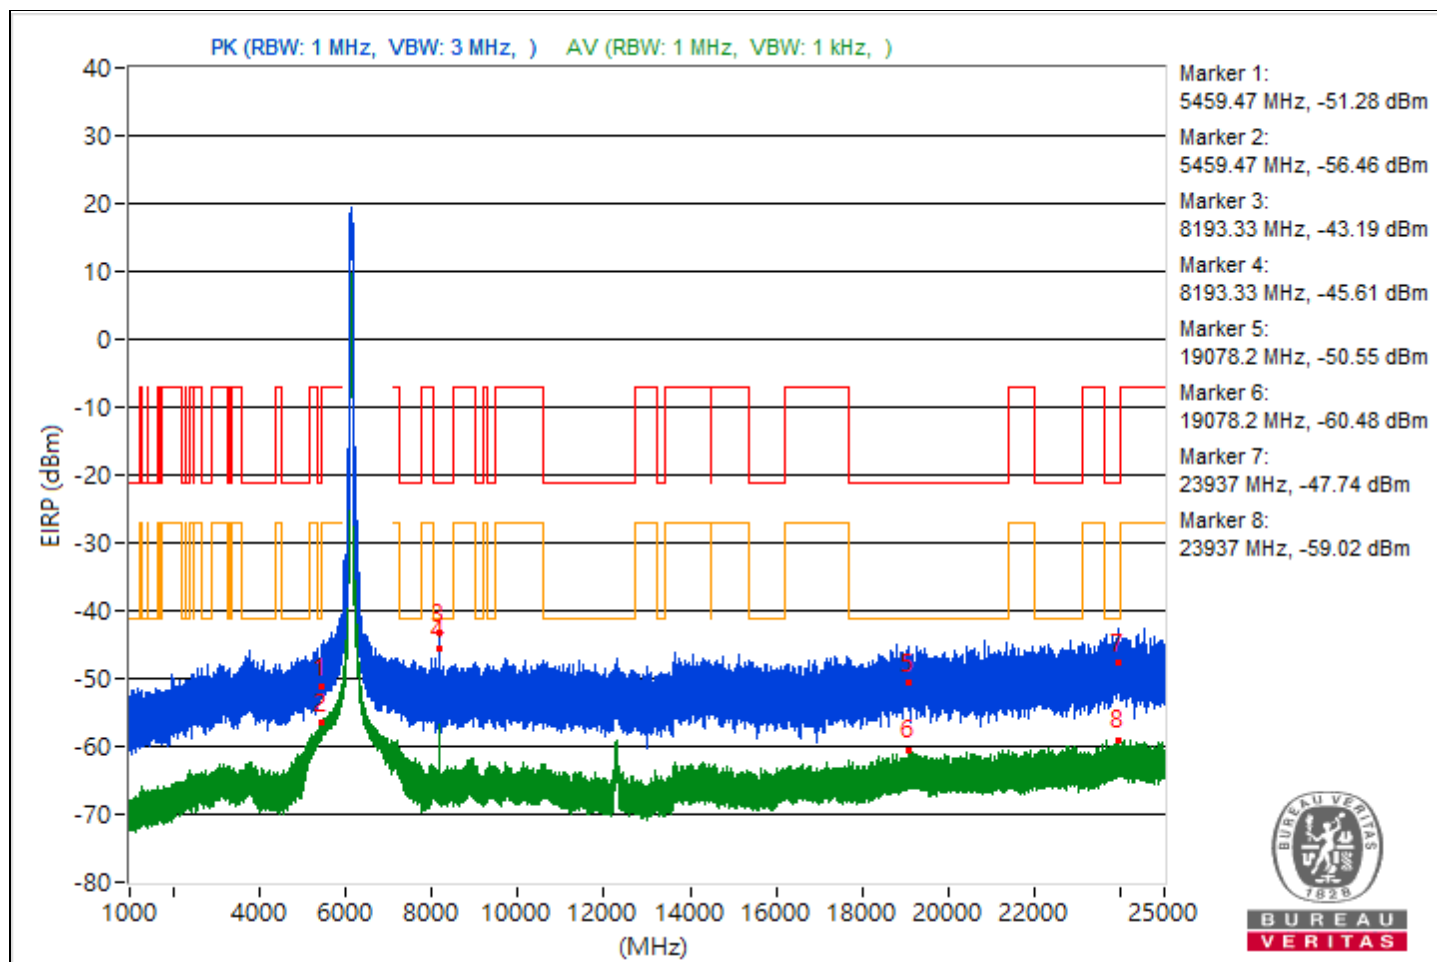


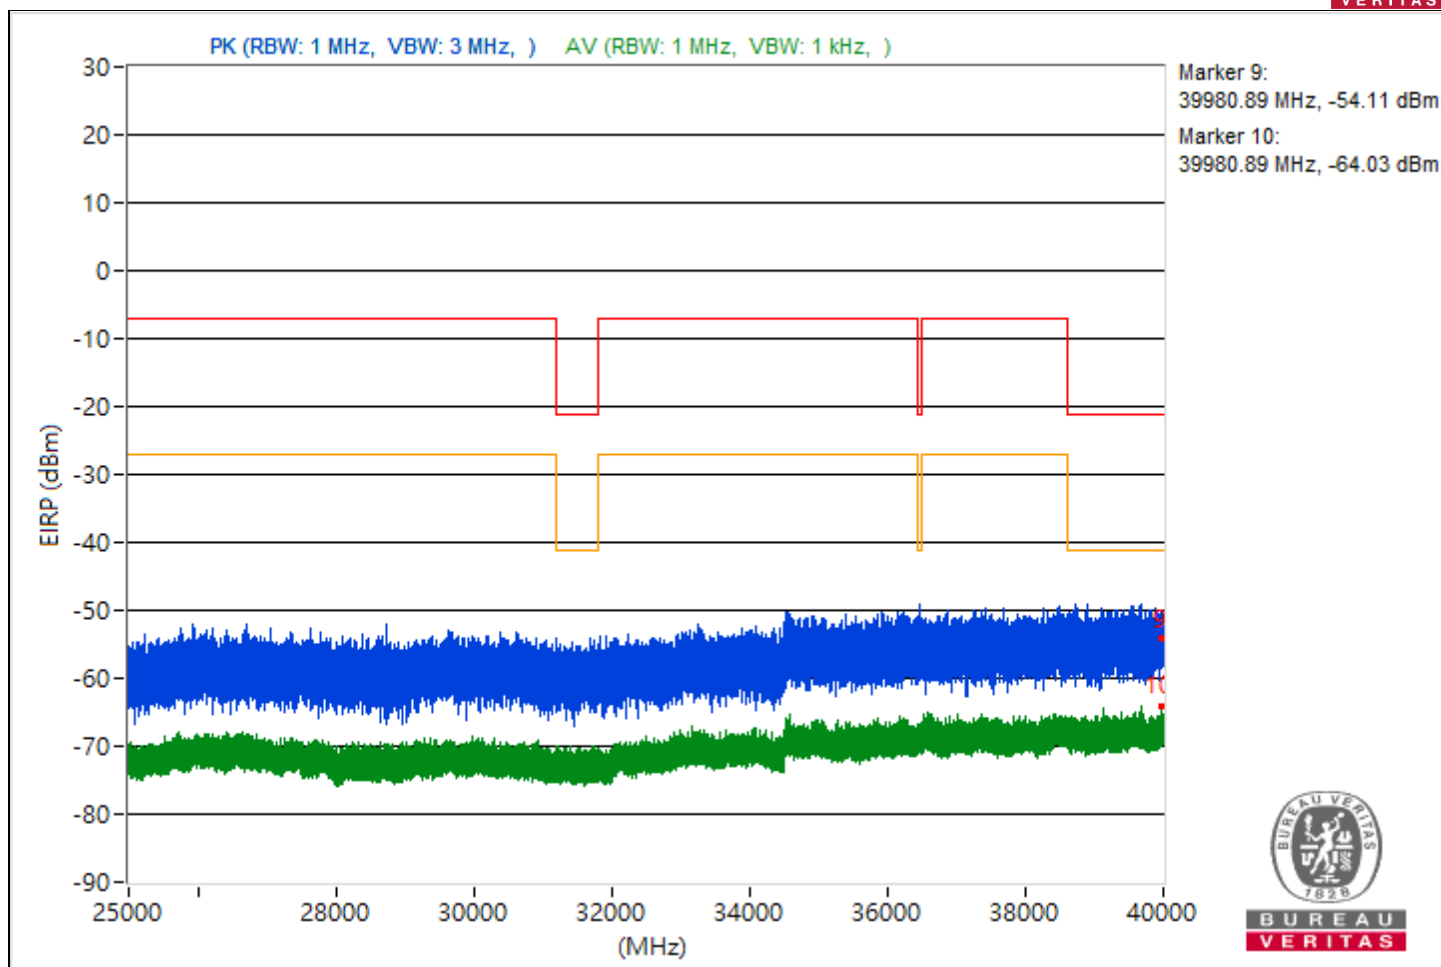


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.08	45.18 PK	74	-28.82	-58.45	8.37	-50.08
2	5459.08	38.36 AV	54	-15.64	-65.27	8.37	-56.9
3	7254.11	44.42 PK	74	-29.58	-59.21	8.37	-50.84
4	7254.11	36.7 AV	54	-17.3	-66.93	8.37	-58.56
5	19114	43.88 PK	74	-30.12	-59.75	8.37	-51.38
6	19114	34.96 AV	54	-19.04	-68.67	8.37	-60.3
7	23892.1	46.89 PK	74	-27.11	-56.74	8.37	-48.37
8	23892.1	36.34 AV	54	-17.66	-67.29	8.37	-58.92
9	39681.69	42.71 PK	74	-31.29	-60.92	8.37	-52.55
10	39681.69	30.76 AV	54	-23.24	-72.87	8.37	-64.5

Note: Margin value = Emission Level - Limit value

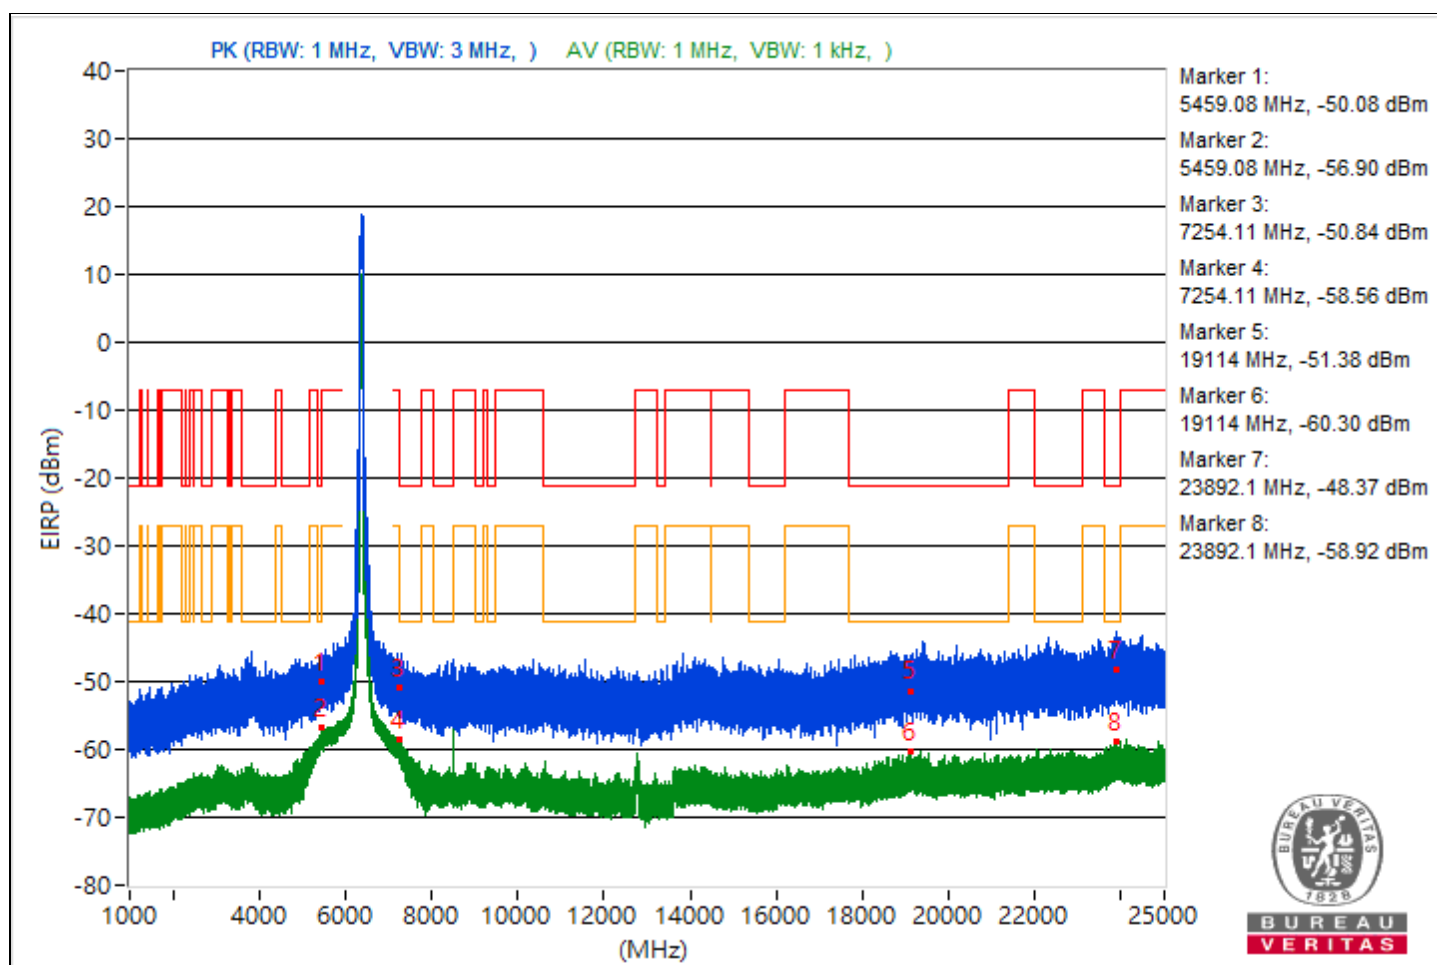


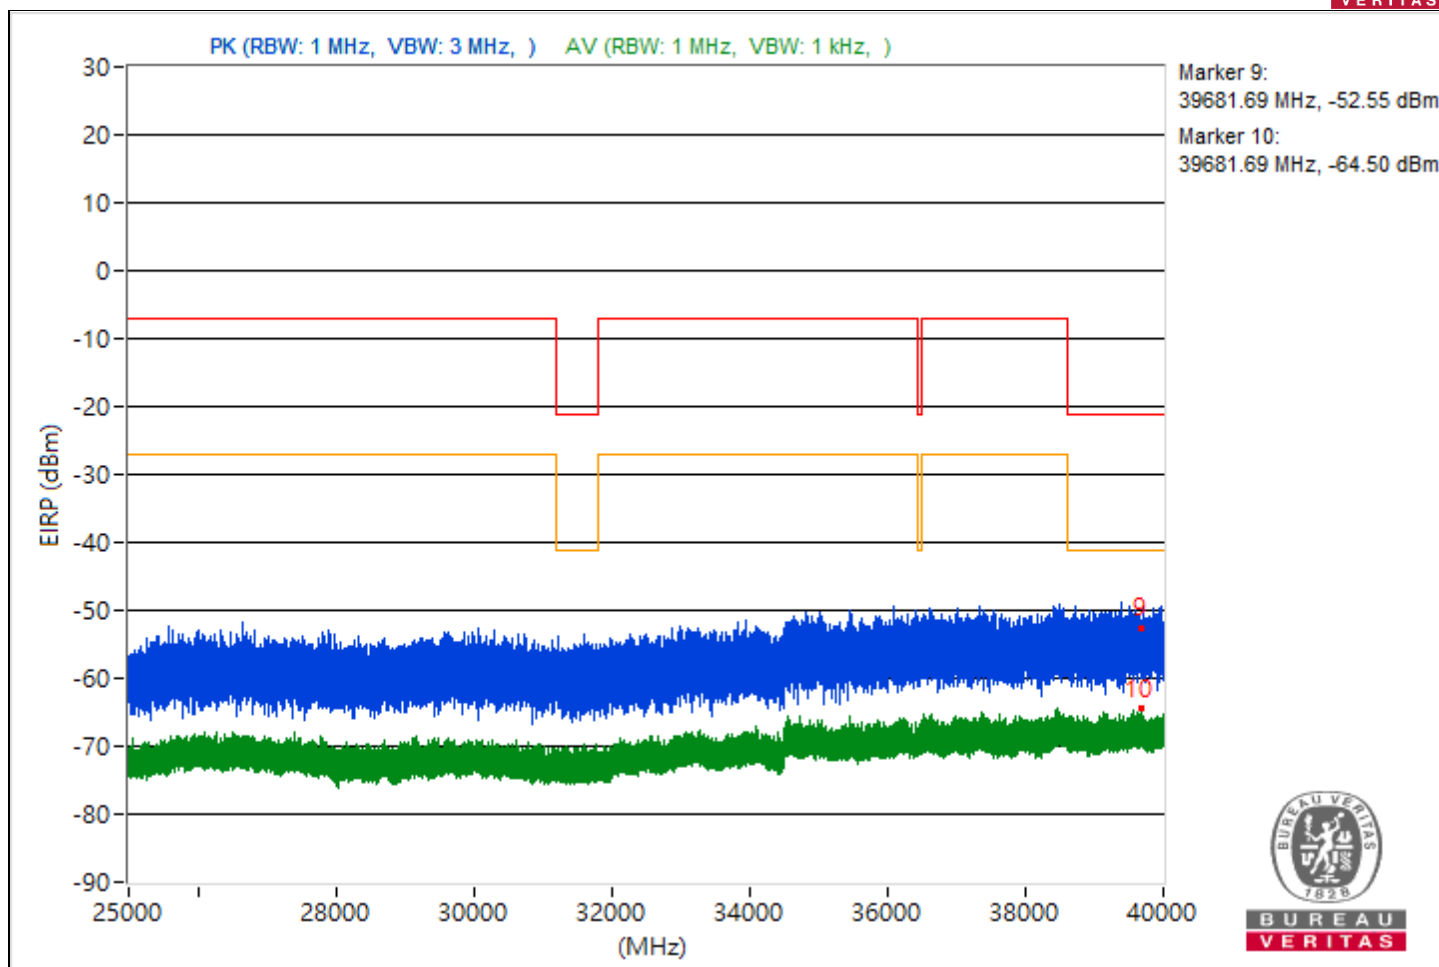


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5434.97	44.26 PK	74	-29.74	-59.37	8.37	-51
2	5434.97	36.57 AV	54	-17.43	-67.06	8.37	-58.69
3	7251.16	44.88 PK	74	-29.12	-58.75	8.37	-50.38
4	7251.16	36.55 AV	54	-17.45	-67.08	8.37	-58.71
5	21376.8	44.72 PK	74	-29.28	-58.91	8.37	-50.54
6	21376.8	35.17 AV	54	-18.83	-68.46	8.37	-60.09
7	23983	46.86 PK	74	-27.14	-56.77	8.37	-48.4
8	23983	36.98 AV	54	-17.02	-66.65	8.37	-58.28
9	39592.36	40.82 PK	74	-33.18	-62.81	8.37	-54.44
10	39592.36	31.03 AV	54	-22.97	-72.6	8.37	-64.23

Note: Margin value = Emission Level - Limit value

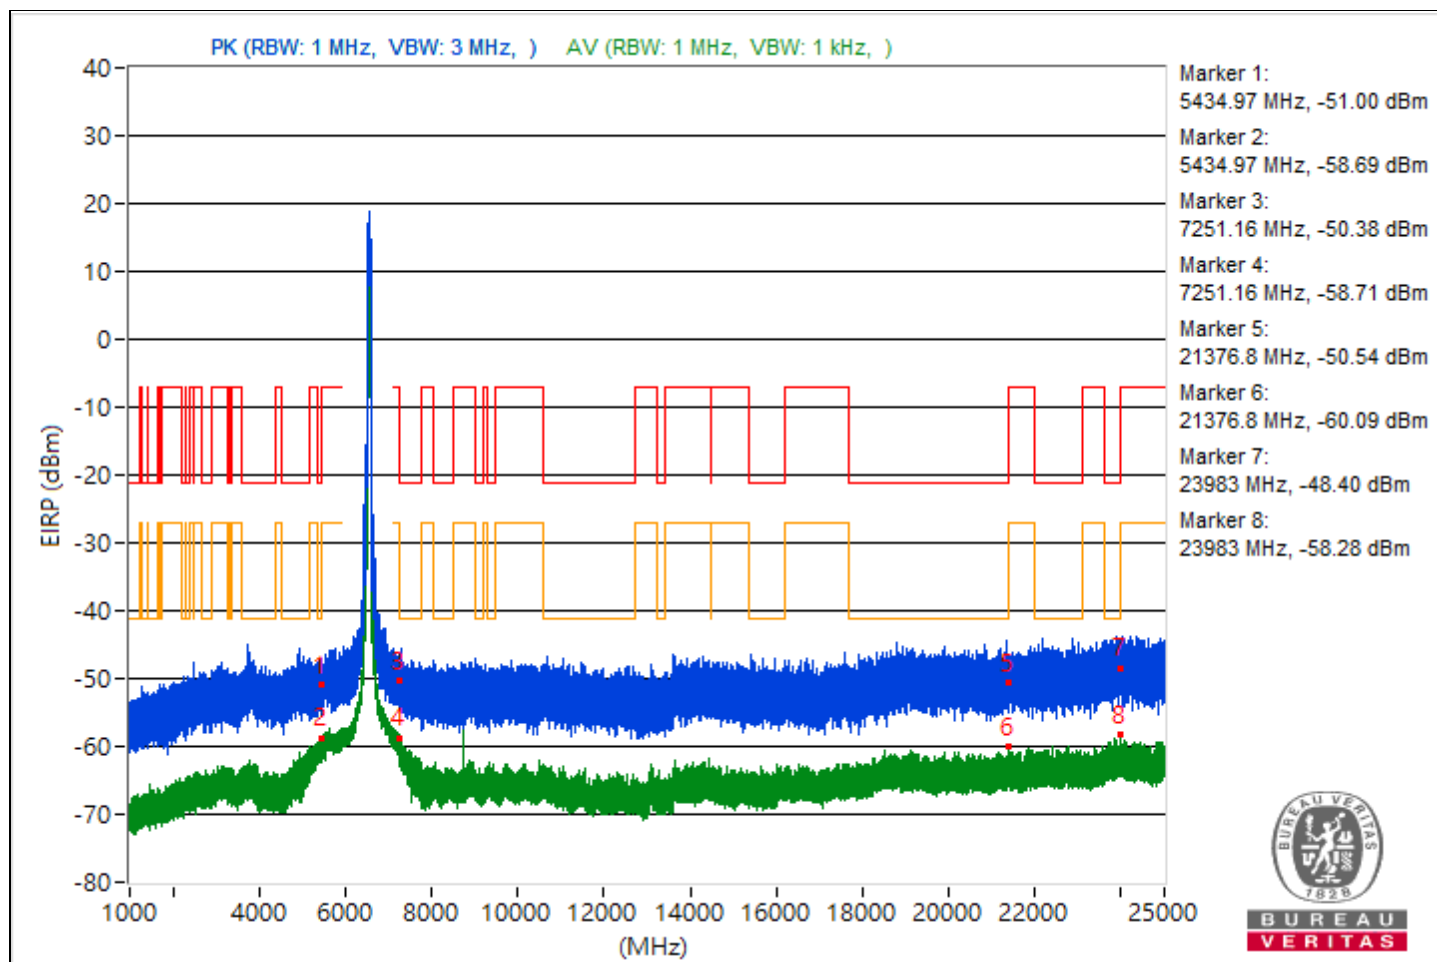


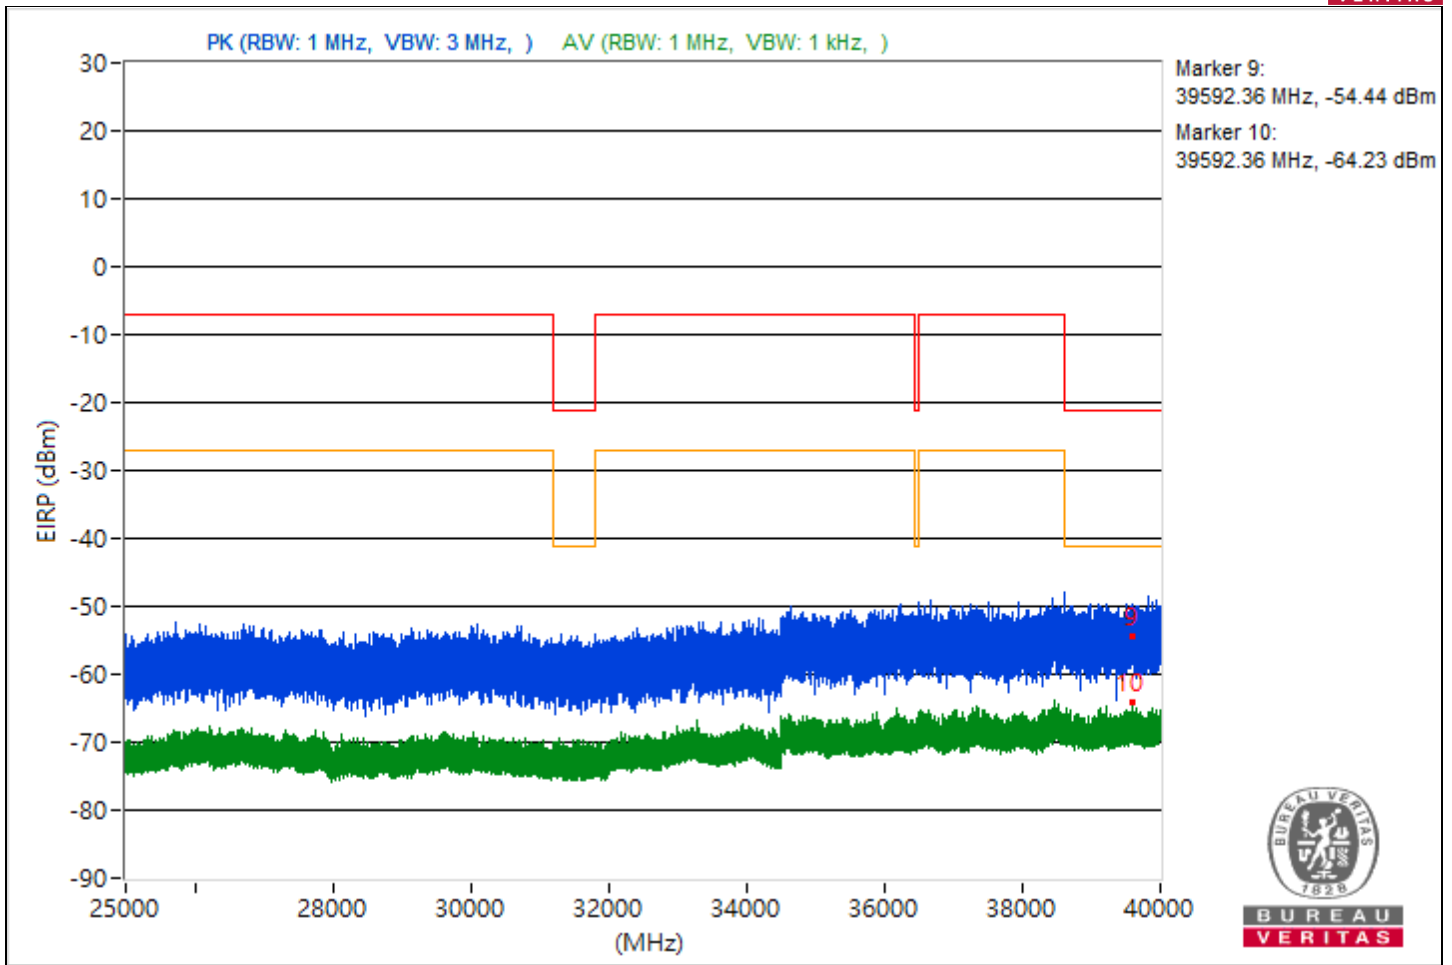


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5404.56	42.75 PK	74	-31.25	-60.88	8.37	-52.51
2	5404.56	35.96 AV	54	-18.04	-67.67	8.37	-59.3
3	7254.34	43.79 PK	74	-30.21	-59.84	8.37	-51.47
4	7254.34	38.12 AV	54	-15.88	-65.51	8.37	-57.14
5	21356.6	46.19 PK	74	-27.81	-57.44	8.37	-49.07
6	21356.6	35.03 AV	54	-18.97	-68.6	8.37	-60.23
7	23974.5	47.82 PK	74	-26.18	-55.81	8.37	-47.44
8	23974.5	36.19 AV	54	-17.81	-67.44	8.37	-59.07
9	39194.84	40.66 PK	74	-33.34	-62.97	8.37	-54.6
10	39194.84	30.43 AV	54	-23.57	-73.2	8.37	-64.83

Note: Margin value = Emission Level - Limit value

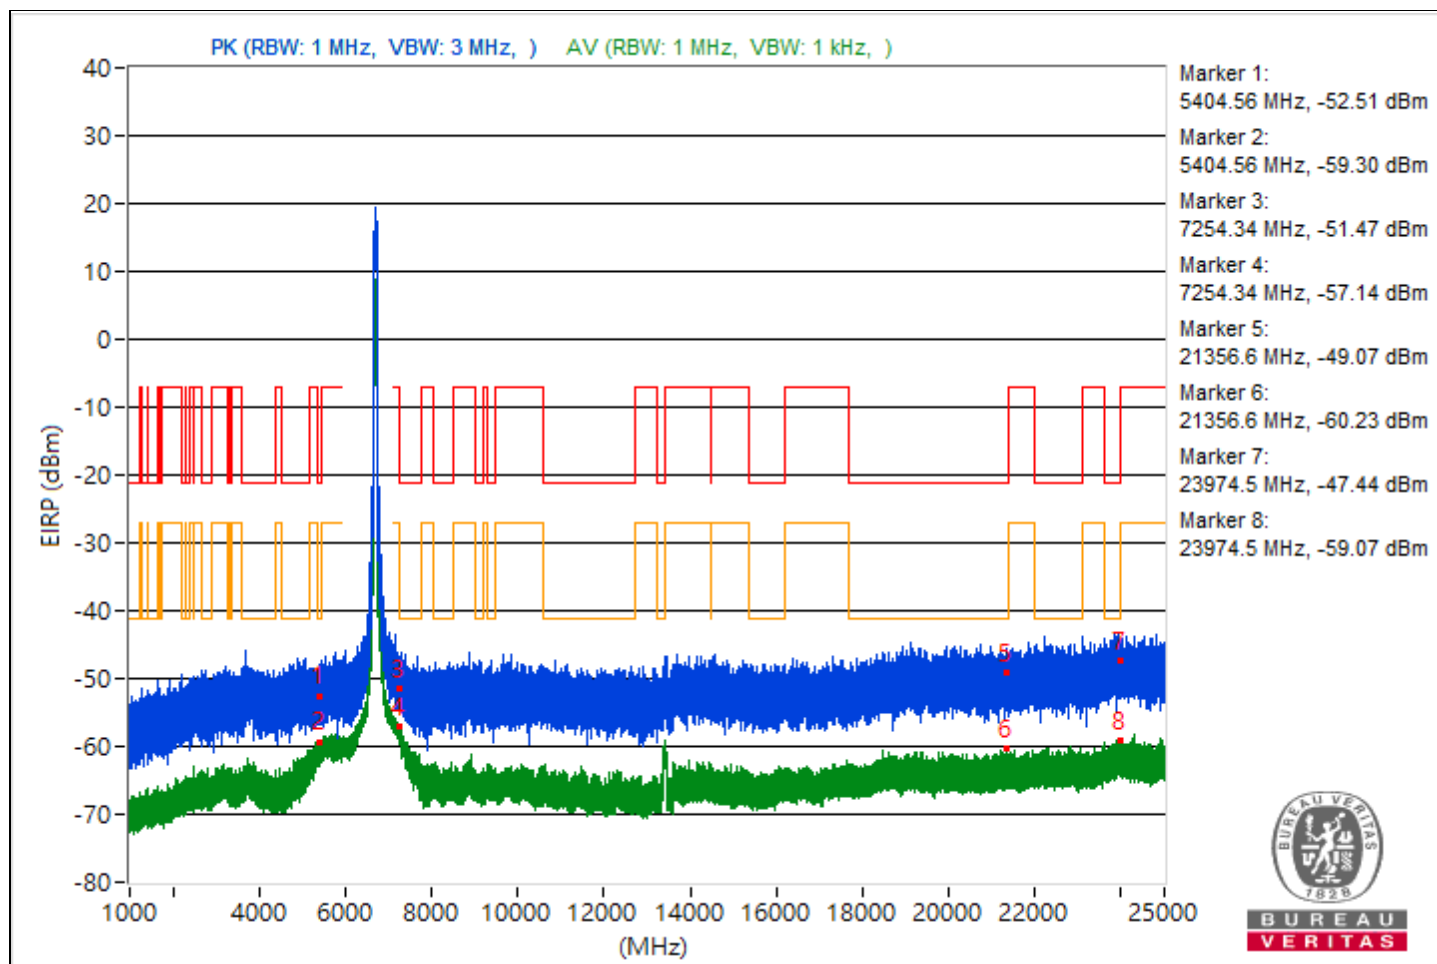


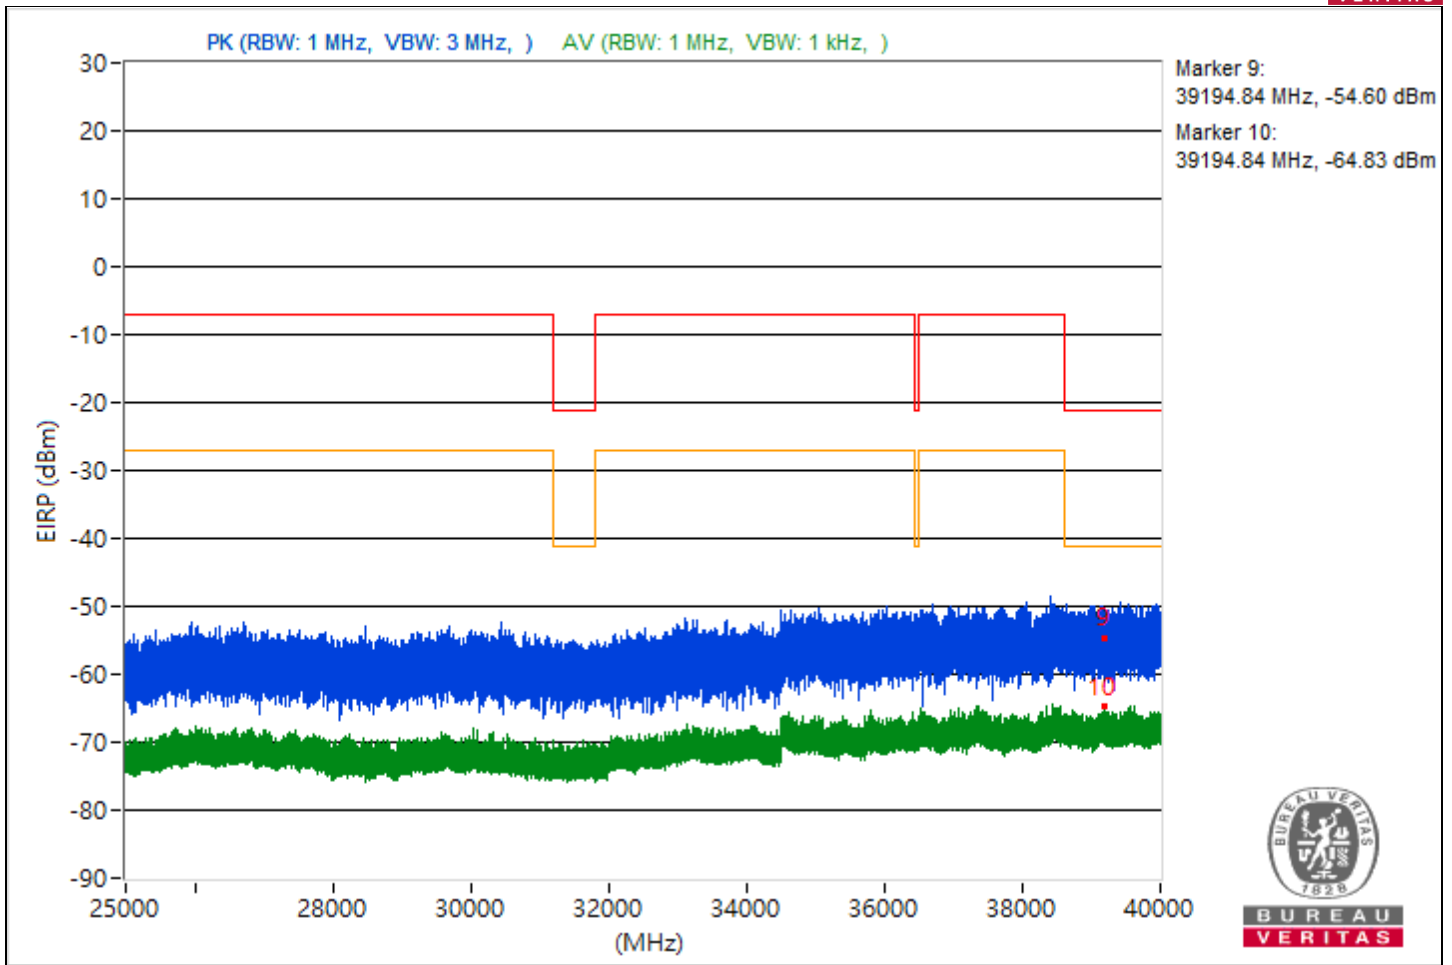


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5413.34	43.25 PK	74	-30.75	-60.38	8.37	-52.01
2	5413.34	35.64 AV	54	-18.36	-67.99	8.37	-59.62
3	7250.07	47.06 PK	74	-26.94	-56.57	8.37	-48.2
4	7250.07	39.6 AV	54	-14.4	-64.03	8.37	-55.66
5	19066	46 PK	74	-28	-57.63	8.37	-49.26
6	19066	35.15 AV	54	-18.85	-68.48	8.37	-60.11
7	23873.9	46.17 PK	74	-27.83	-57.46	8.37	-49.09
8	23873.9	35.94 AV	54	-18.06	-67.69	8.37	-59.32
9	39998.84	40.83 PK	74	-33.17	-62.8	8.37	-54.43
10	39998.84	30.89 AV	54	-23.11	-72.74	8.37	-64.37

Note: Margin value = Emission Level - Limit value

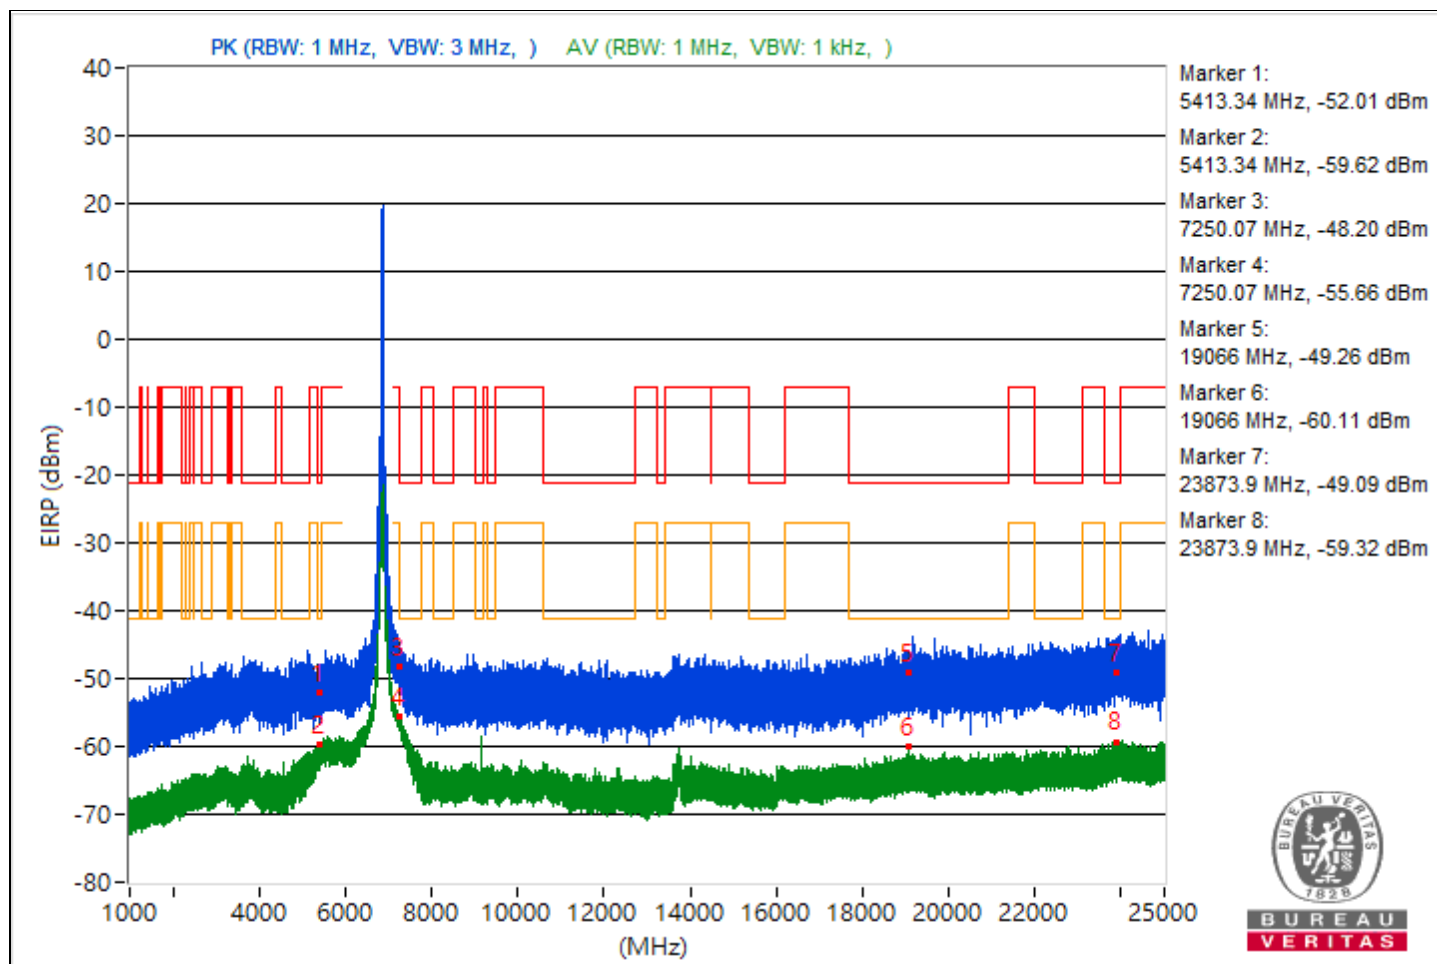

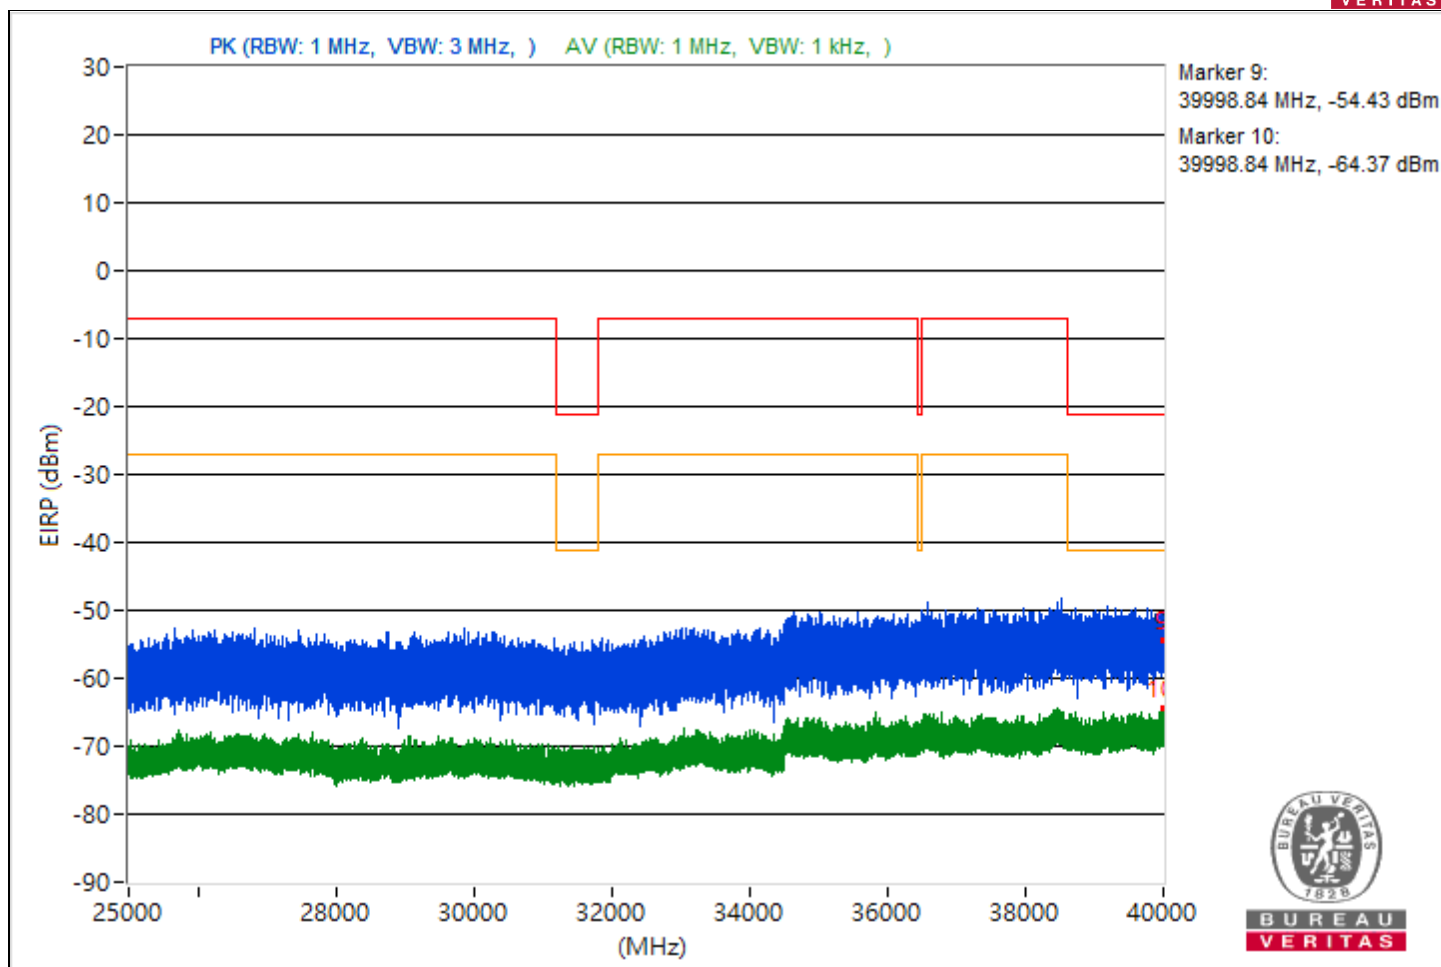



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.64	65.25 PK	88.26	-23.01	-38.38	8.37	-30.01
2	#5874.64	56.84 AV	68.26	-11.42	-46.79	8.37	-38.42
3	8033.42	53.95 PK	74	-20.05	-49.68	8.37	-41.31
4	8033.42	51.22 AV	54	-2.78	-52.41	8.37	-44.04
5	20715.6	42.06 PK	74	-31.94	-61.57	8.37	-53.2
6	20715.6	34.76 AV	54	-19.24	-68.87	8.37	-60.5
7	23960.4	46.74 PK	74	-27.26	-56.89	8.37	-48.52
8	23960.4	36.07 AV	54	-17.93	-67.56	8.37	-59.19
9	39680.98	40.84 PK	74	-33.16	-62.79	8.37	-54.42
10	39680.98	30.49 AV	54	-23.51	-73.14	8.37	-64.77

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

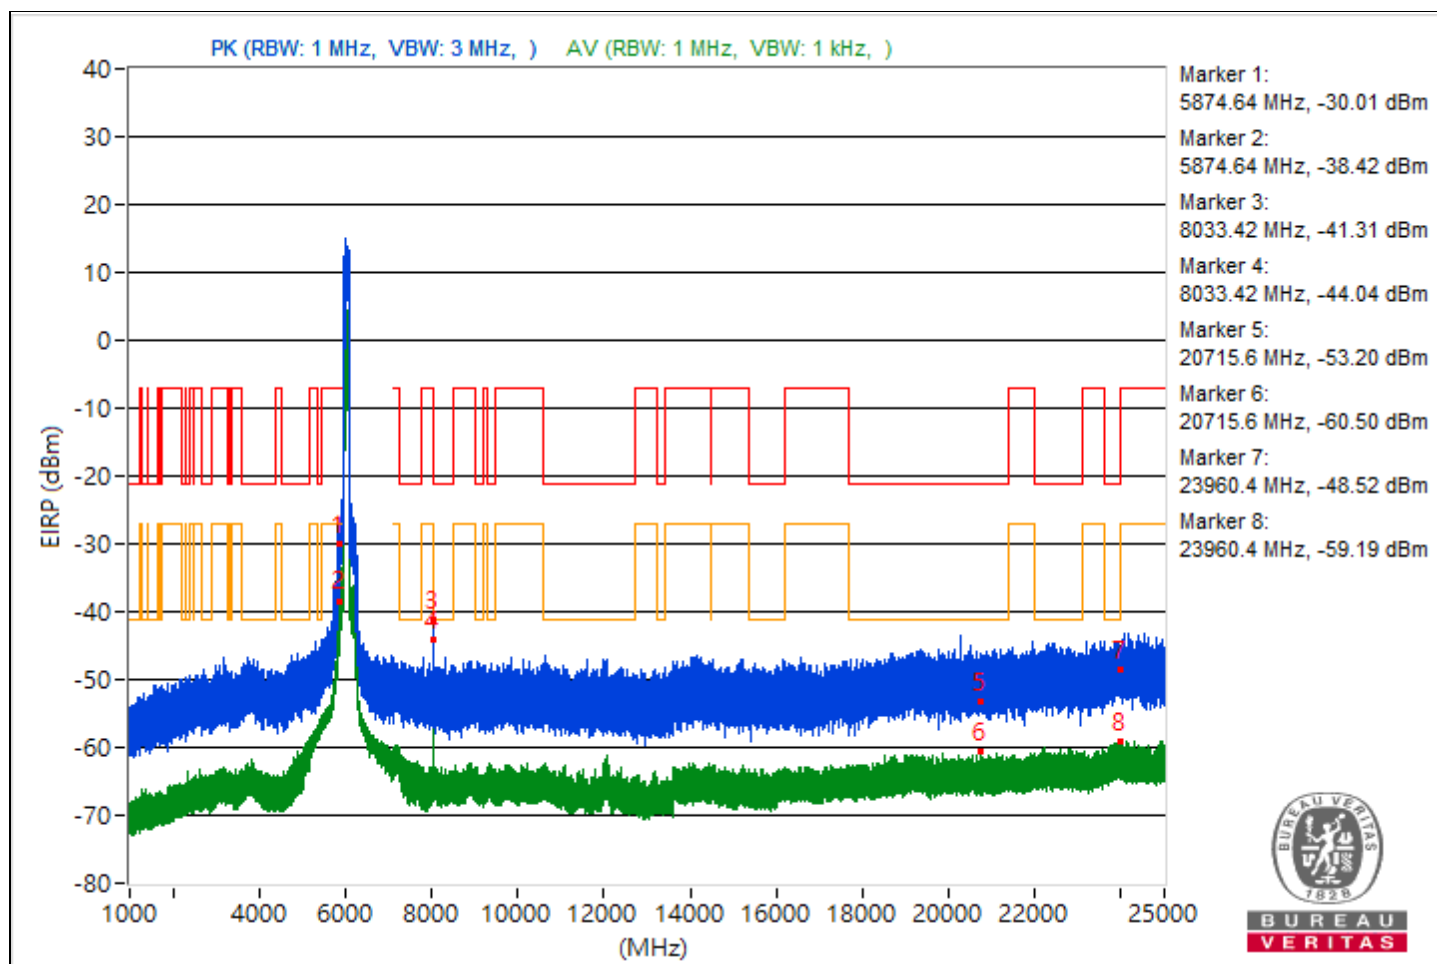


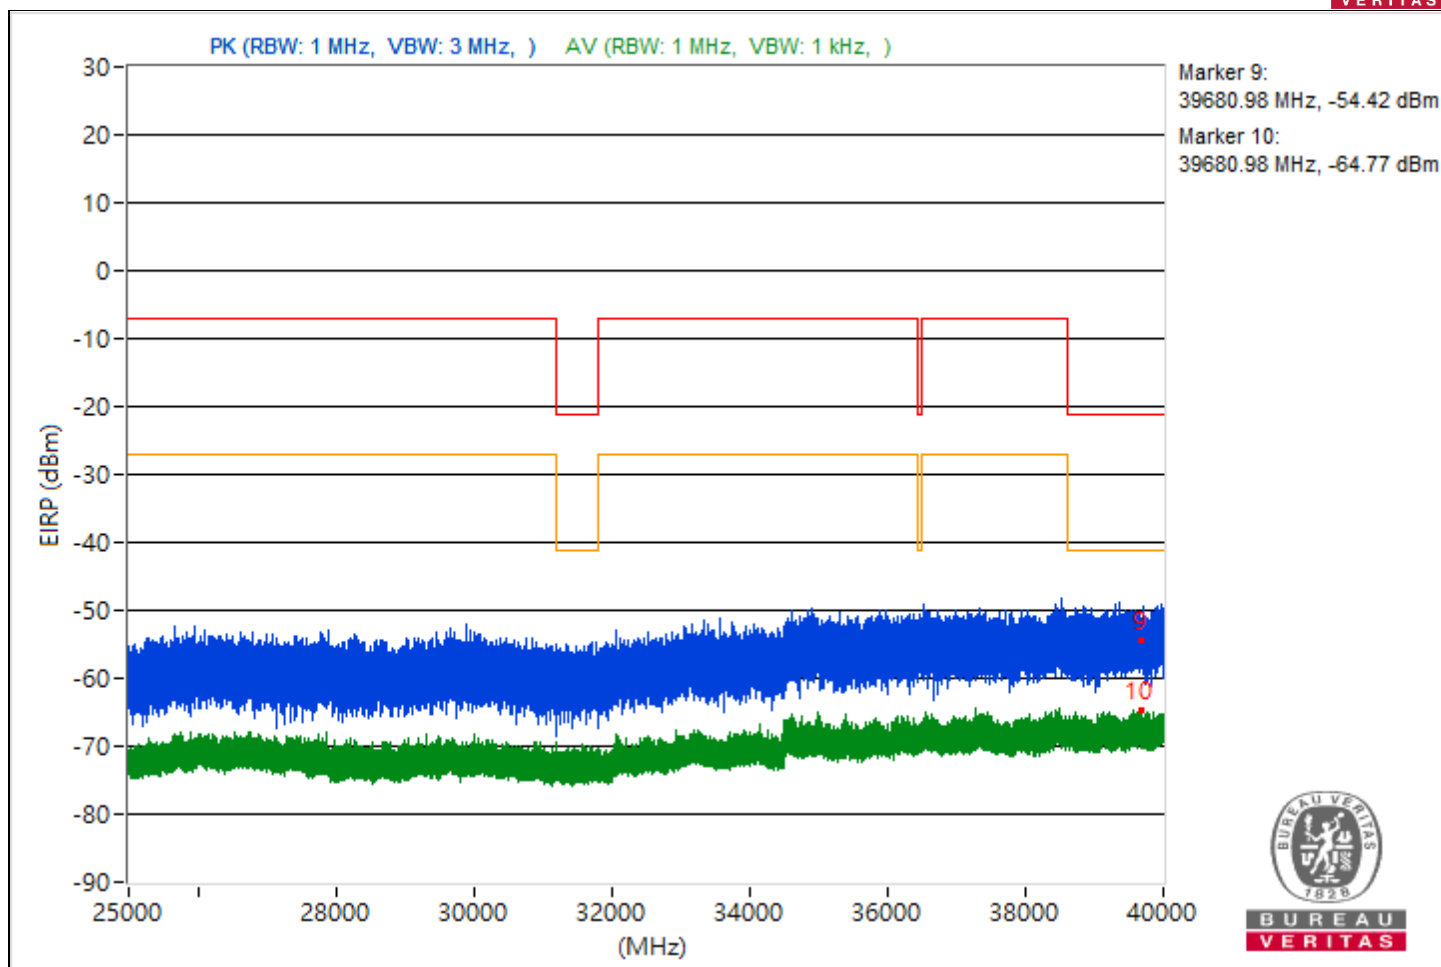


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5445	48.35 PK	74	-25.65	-55.28	8.37	-46.91
2	5445	38.66 AV	54	-15.34	-64.97	8.37	-56.6
3	8246.76	50.89 PK	74	-23.11	-52.74	8.37	-44.37
4	8246.76	48.32 AV	54	-5.68	-55.31	8.37	-46.94
5	20570.2	45.94 PK	74	-28.06	-57.69	8.37	-49.32
6	20570.2	35.21 AV	54	-18.79	-68.42	8.37	-60.05
7	23975.6	45.99 PK	74	-28.01	-57.64	8.37	-49.27
8	23975.6	35.99 AV	54	-18.01	-67.64	8.37	-59.27
9	38821.87	40.95 PK	74	-33.05	-62.68	8.37	-54.31
10	38821.87	30.42 AV	54	-23.58	-73.21	8.37	-64.84

Note: Margin value = Emission Level - Limit value

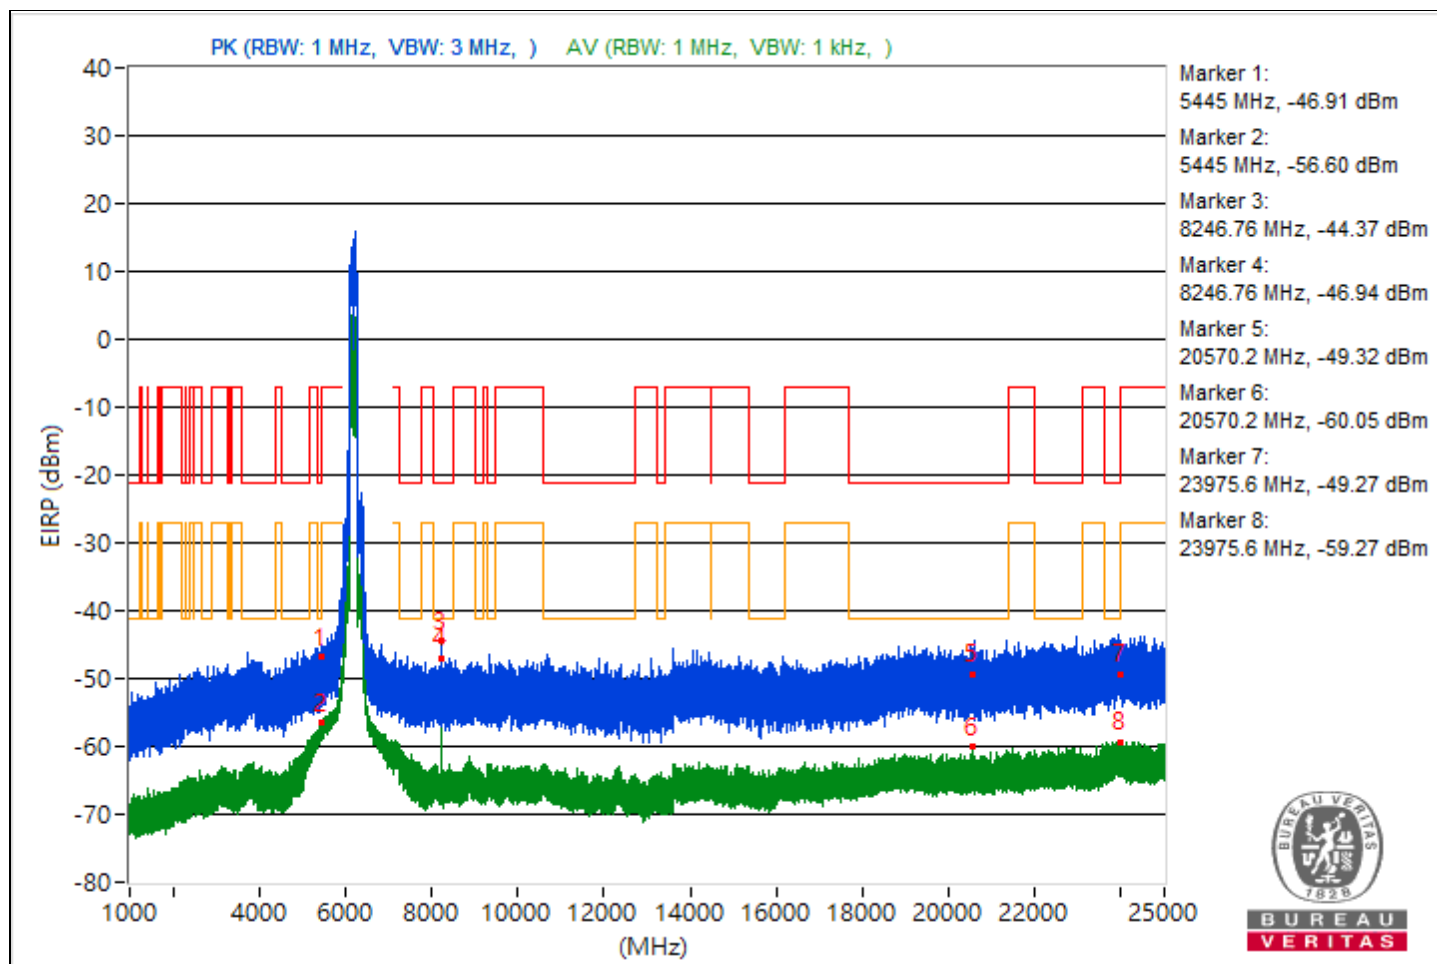


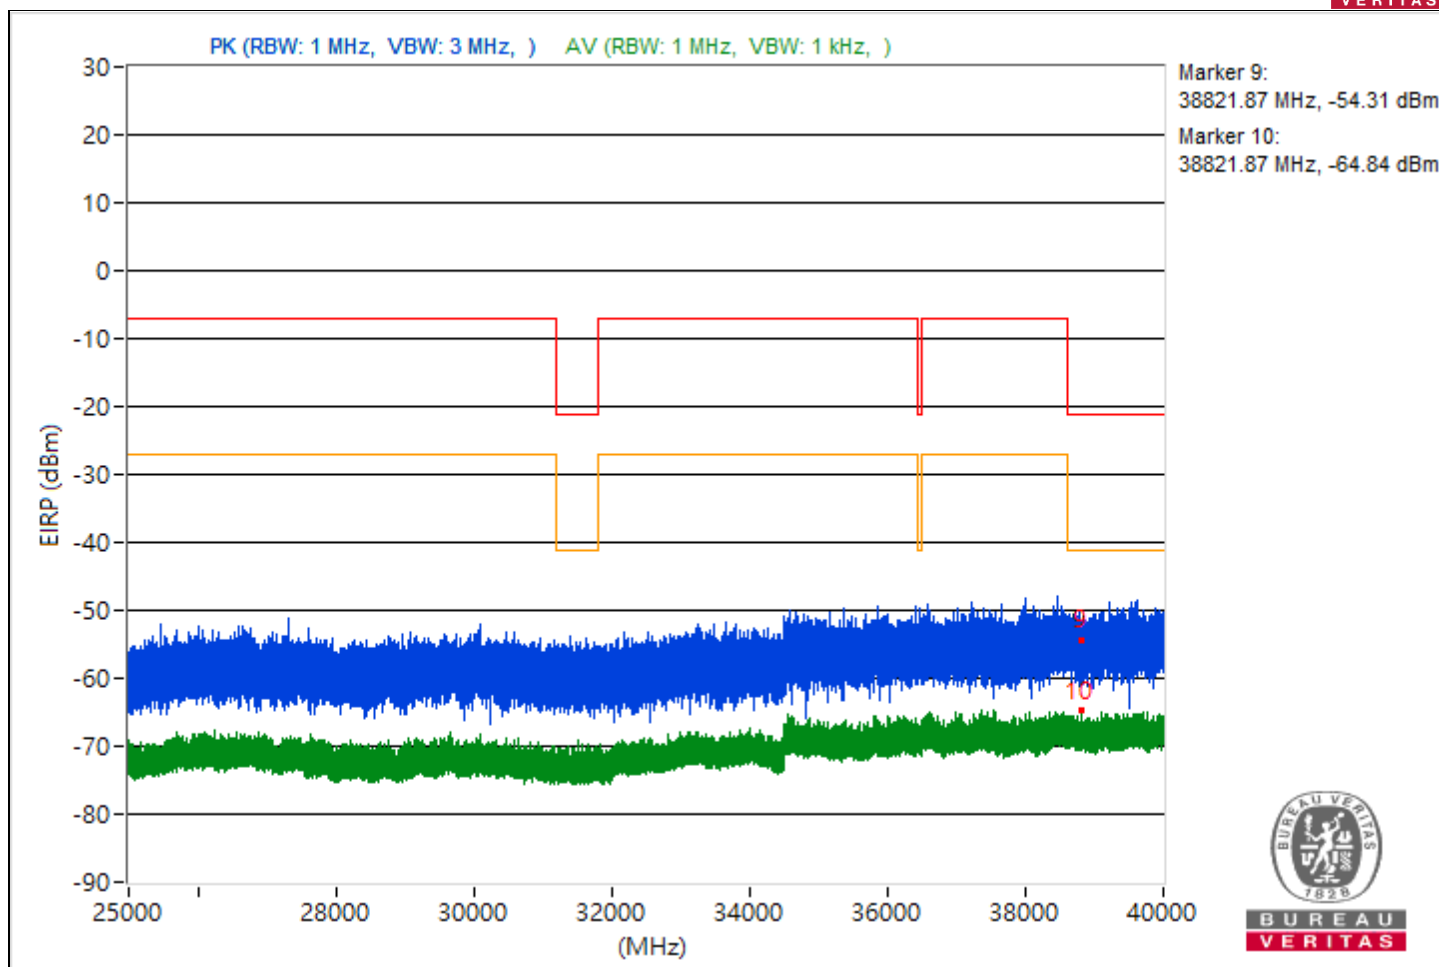


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.09	45.42 PK	74	-28.58	-58.21	8.37	-49.84
2	5446.09	38.02 AV	54	-15.98	-65.61	8.37	-57.24
3	8460.09	48.46 PK	74	-25.54	-55.17	8.37	-46.8
4	8460.09	45.74 AV	54	-8.26	-57.89	8.37	-49.52
5	21136.4	44.23 PK	74	-29.77	-59.4	8.37	-51.03
6	21136.4	34.71 AV	54	-19.29	-68.92	8.37	-60.55
7	23770.4	48.87 PK	74	-25.13	-54.76	8.37	-46.39
8	23770.4	35.95 AV	54	-18.05	-67.68	8.37	-59.31
9	39964.62	41.63 PK	74	-32.37	-62	8.37	-53.63
10	39964.62	31.62 AV	54	-22.38	-72.01	8.37	-63.64

Note: Margin value = Emission Level - Limit value

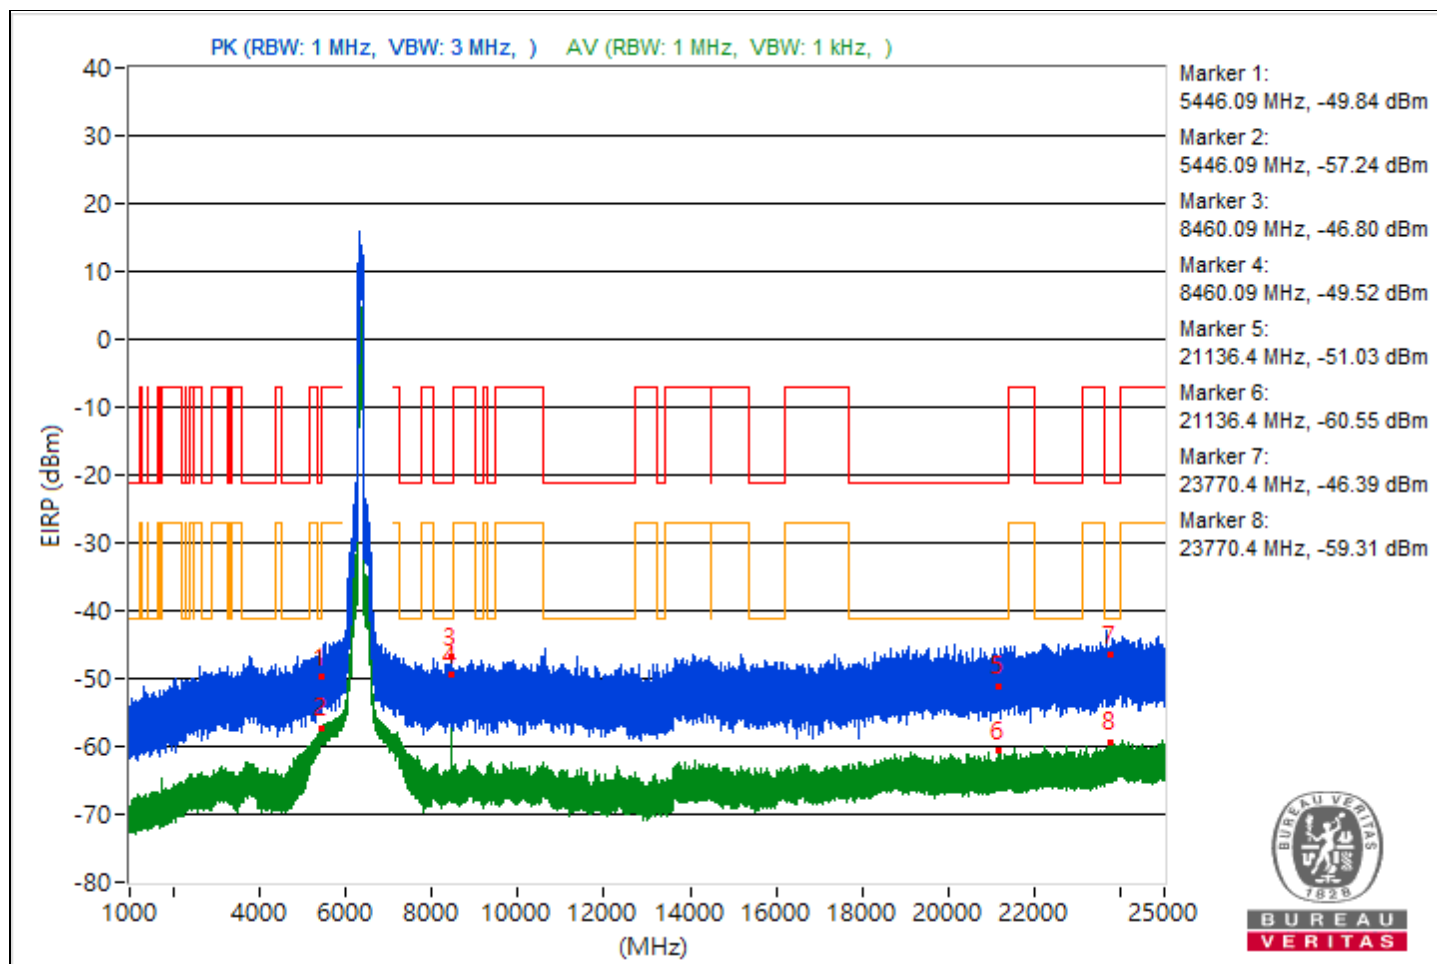


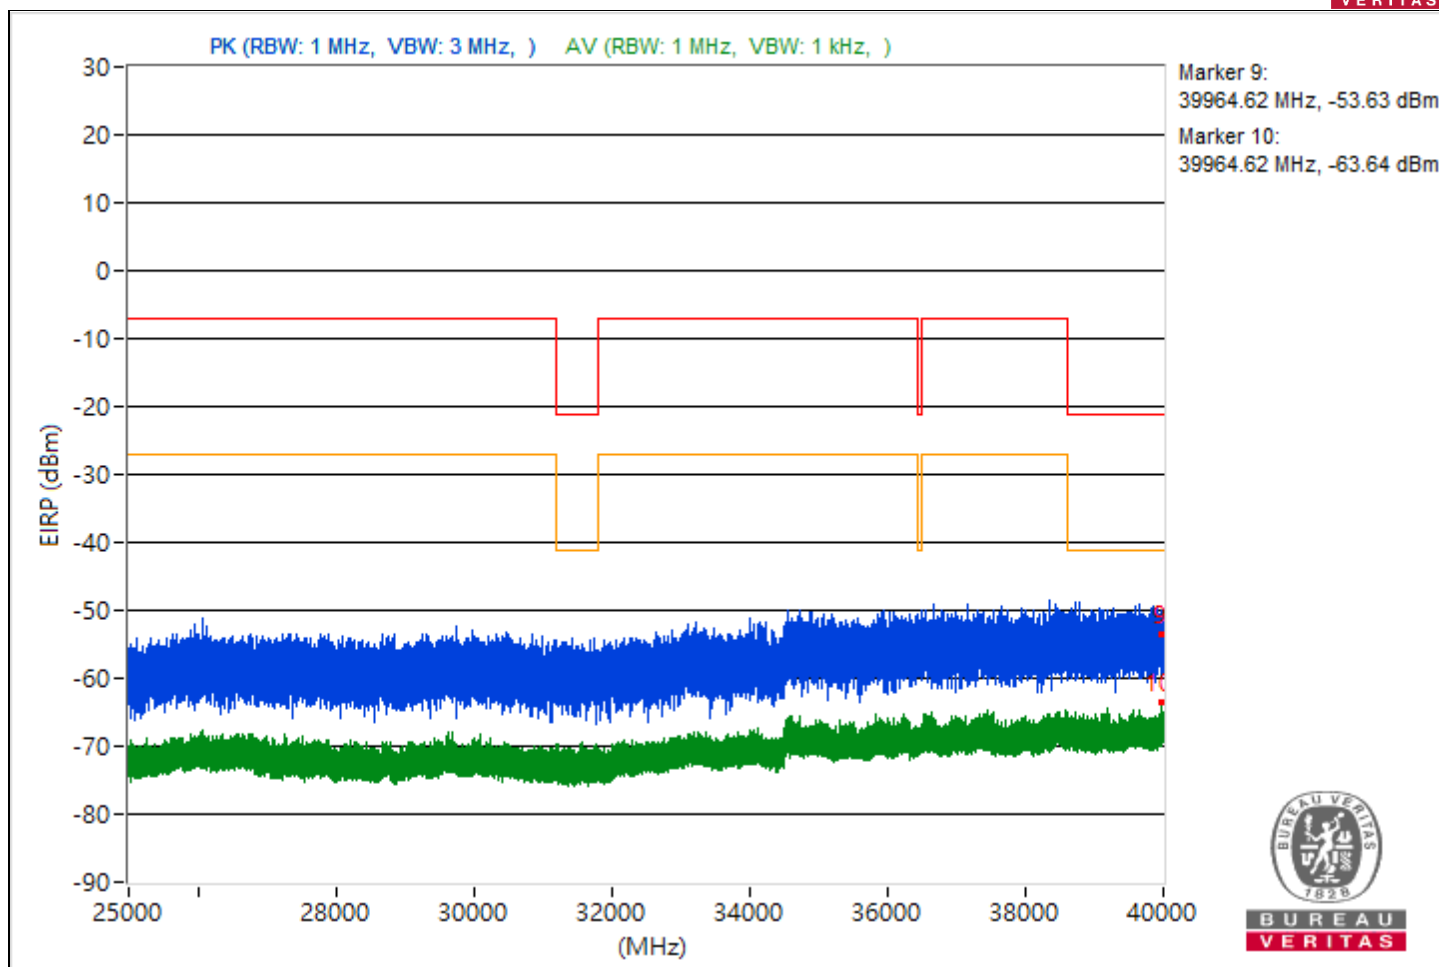


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.87	44.29 PK	74	-29.71	-59.34	8.37	-50.97
2	5446.87	36.7 AV	54	-17.3	-66.93	8.37	-58.56
3	7254.66	44.28 PK	74	-29.72	-59.35	8.37	-50.98
4	7254.66	37.09 AV	54	-16.91	-66.54	8.37	-58.17
5	20504.7	44.04 PK	74	-29.96	-59.59	8.37	-51.22
6	20504.7	34.73 AV	54	-19.27	-68.9	8.37	-60.53
7	23955.8	47.81 PK	74	-26.19	-55.82	8.37	-47.45
8	23955.8	36.22 AV	54	-17.78	-67.41	8.37	-59.04
9	39674.4	39.44 PK	74	-34.56	-64.19	8.37	-55.82
10	39674.4	30.58 AV	54	-23.42	-73.05	8.37	-64.68

Note: Margin value = Emission Level - Limit value

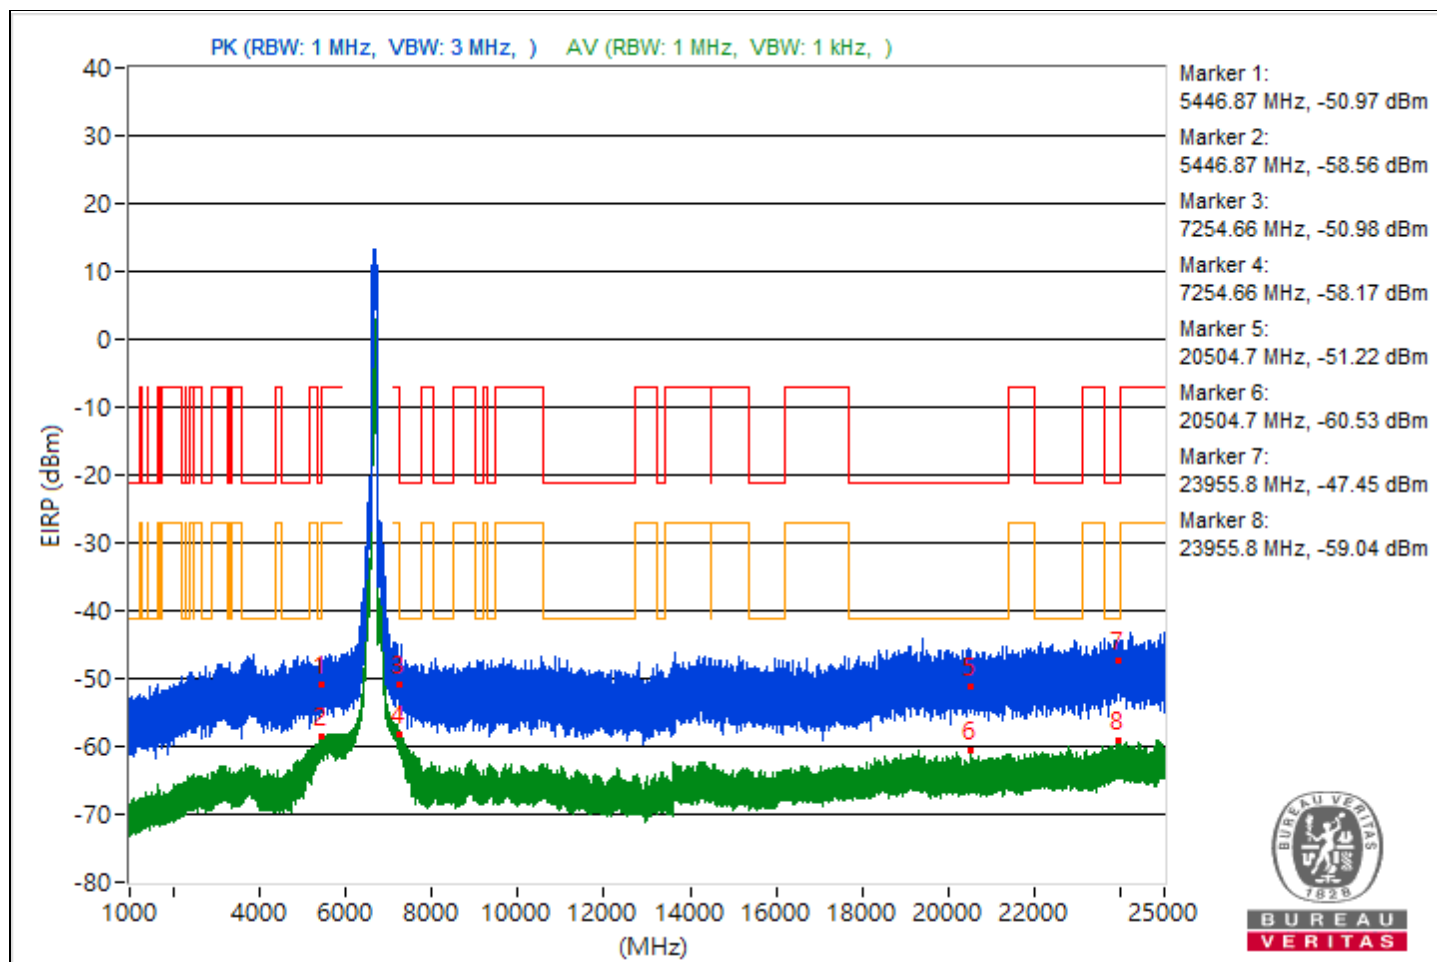

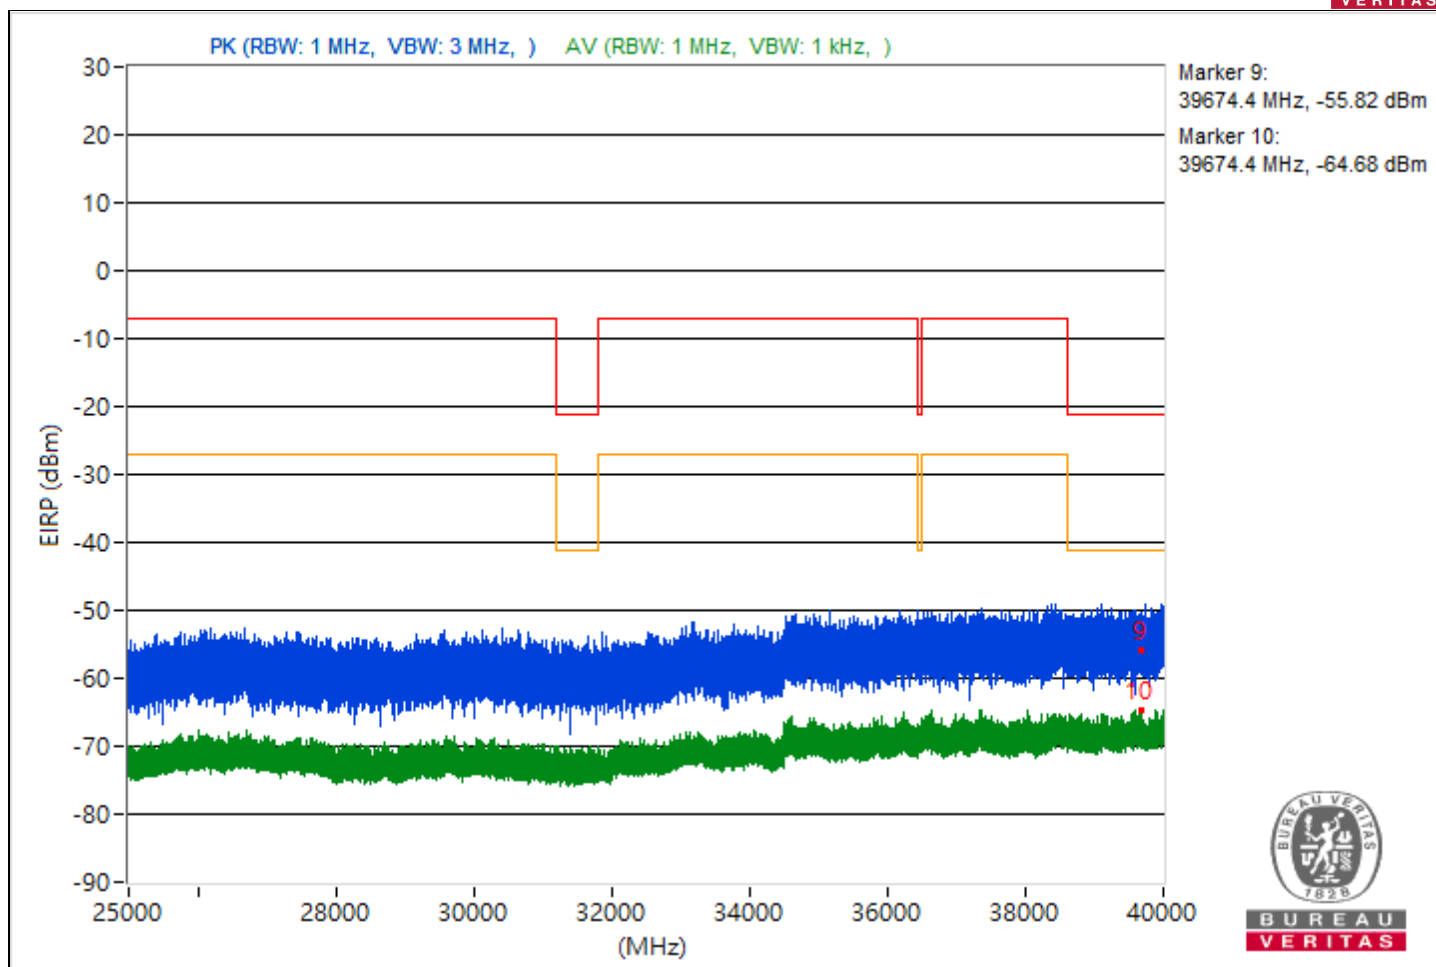



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.53	49.79 PK	74	-24.21	-53.84	8.37	-45.47
2	5458.53	40.19 AV	54	-13.81	-63.44	8.37	-55.07
3	#7940.03	55.16 PK	88.26	-33.1	-48.47	8.37	-40.1
4	#7940.03	52.8 AV	68.26	-15.46	-50.83	8.37	-42.46
5	19086.8	47.18 PK	74	-26.82	-56.45	8.37	-48.08
6	19086.8	34.94 AV	54	-19.06	-68.69	8.37	-60.32
7	23924.6	47.16 PK	74	-26.84	-56.47	8.37	-48.1
8	23924.6	36.36 AV	54	-17.64	-67.27	8.37	-58.9
9	39656.71	40.89 PK	74	-33.11	-62.74	8.37	-54.37
10	39656.71	31.34 AV	54	-22.66	-72.29	8.37	-63.92

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

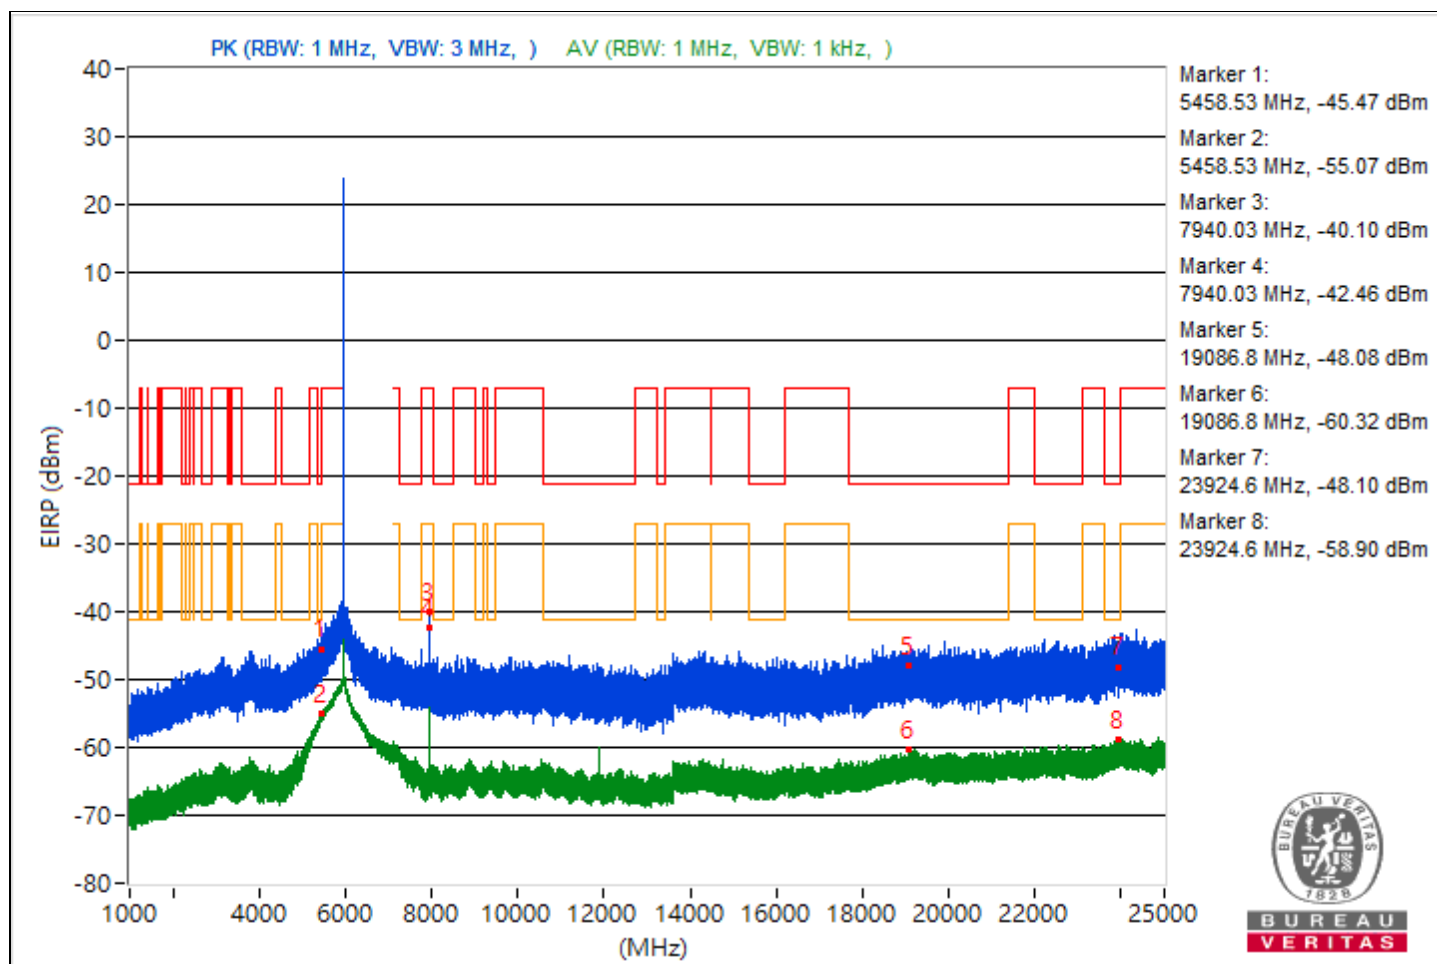


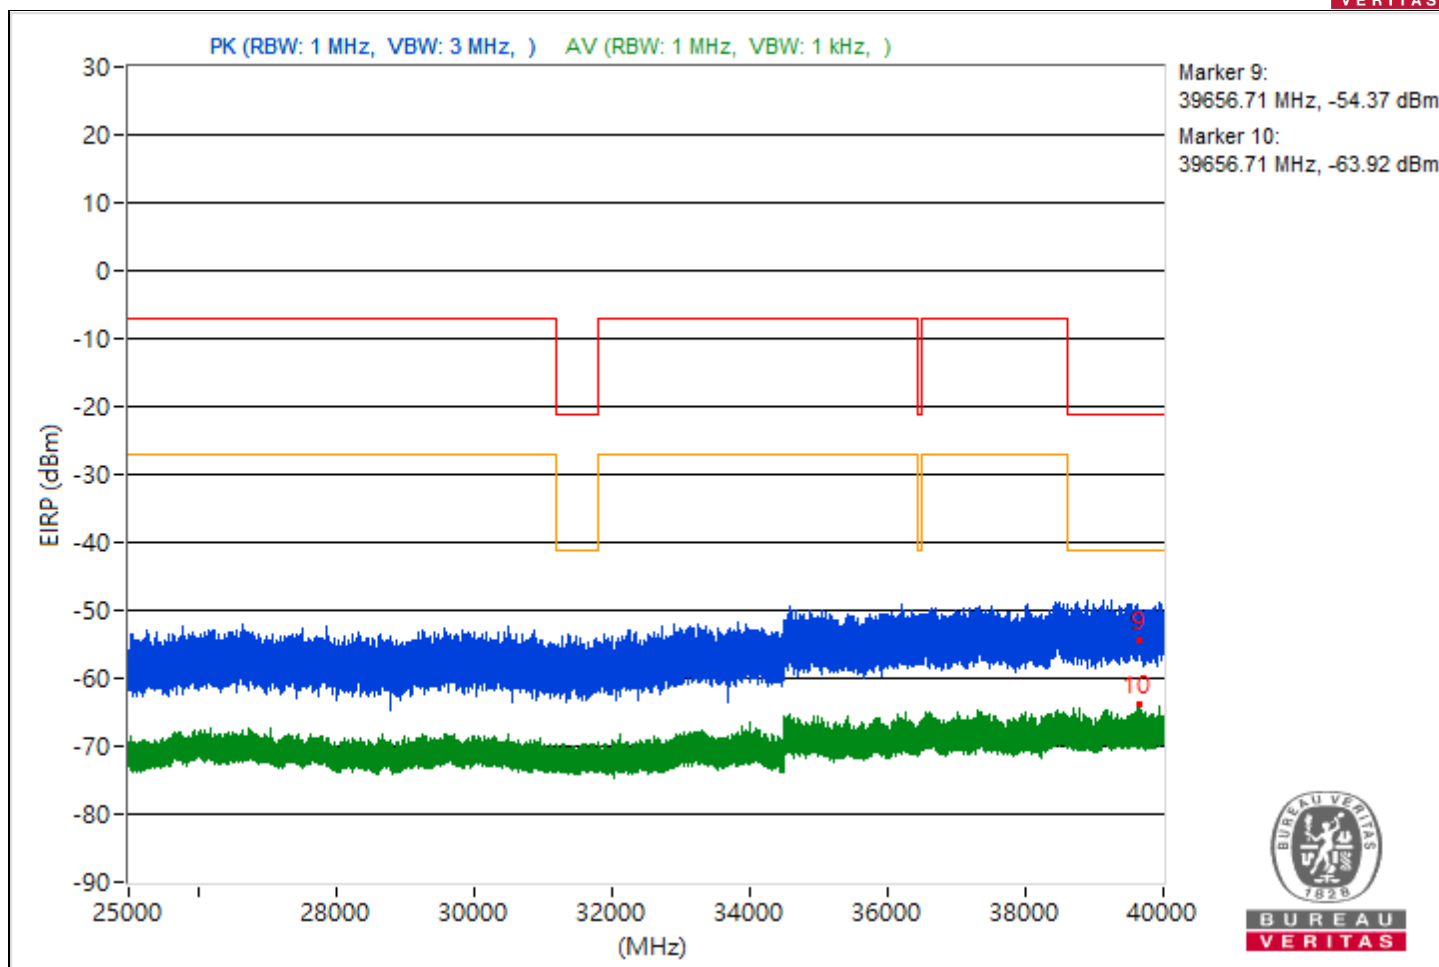

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.16	47.95 PK	74	-26.05	-55.68	8.37	-47.31
2	5459.16	38.07 AV	54	-15.93	-65.56	8.37	-57.19
3	7311.28	45.5 PK	74	-28.5	-58.13	8.37	-49.76
4	7311.28	36.87 AV	54	-17.13	-66.76	8.37	-58.39
5	21068.1	48.03 PK	74	-25.97	-55.6	8.37	-47.23
6	21068.1	34.79 AV	54	-19.21	-68.84	8.37	-60.47
7	23956.5	49.72 PK	74	-24.28	-53.91	8.37	-45.54
8	23956.5	36.36 AV	54	-17.64	-67.27	8.37	-58.9
9	39540.27	44.26 PK	74	-29.74	-59.37	8.37	-51
10	39540.27	31.06 AV	54	-22.94	-72.57	8.37	-64.2

Note: Margin value = Emission Level - Limit value

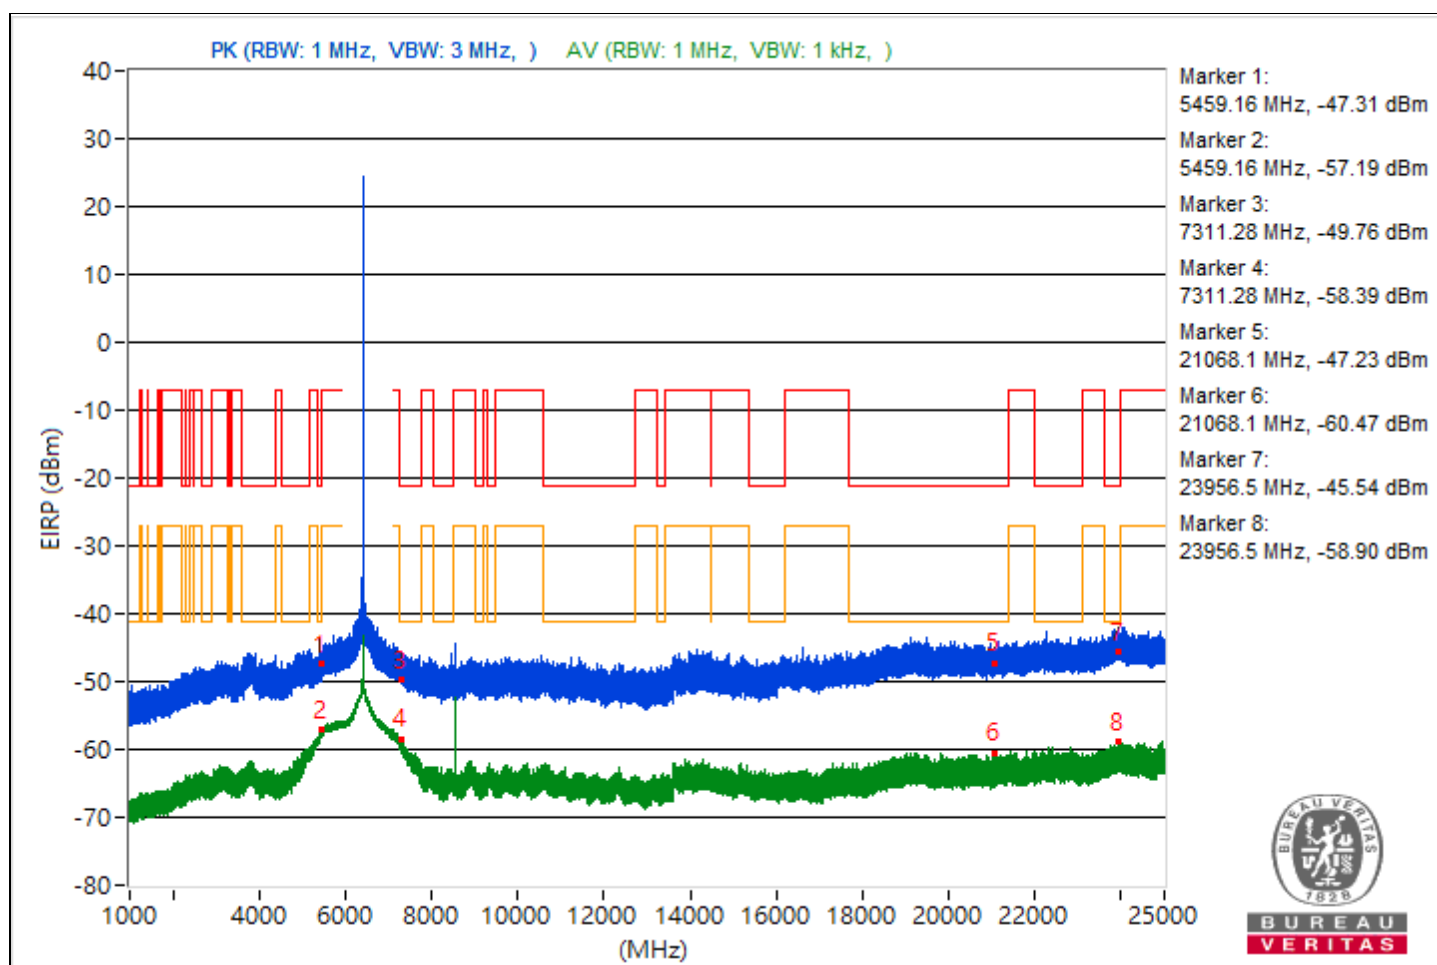





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.16	48.44 PK	74	-25.56	-55.19	8.37	-46.82
2	5452.16	36.79 AV	54	-17.21	-66.84	8.37	-58.47
3	7256.44	47.52 PK	74	-26.48	-56.11	8.37	-47.74
4	7256.44	36.62 AV	54	-17.38	-67.01	8.37	-58.64
5	20173	46.23 PK	74	-27.77	-57.4	8.37	-49.03
6	20173	34.91 AV	54	-19.09	-68.72	8.37	-60.35
7	23998	49.07 PK	74	-24.93	-54.56	8.37	-46.19
8	23998	36.58 AV	54	-17.42	-67.05	8.37	-58.68
9	39994.76	41.12 PK	74	-32.88	-62.51	8.37	-54.14
10	39994.76	31.38 AV	54	-22.62	-72.25	8.37	-63.88

Note: Margin value = Emission Level - Limit value

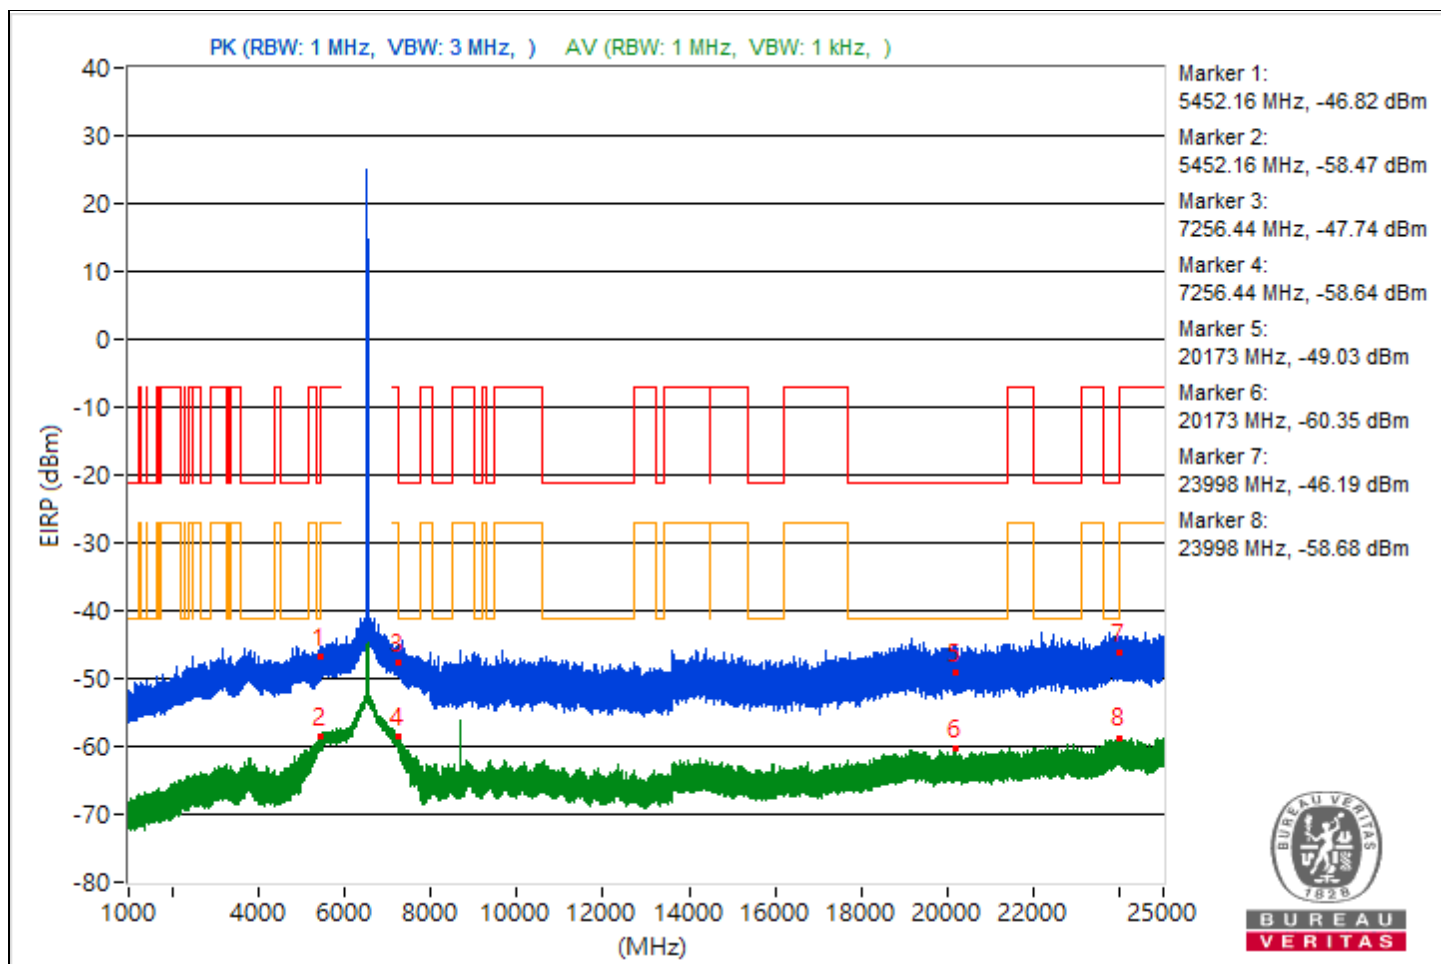

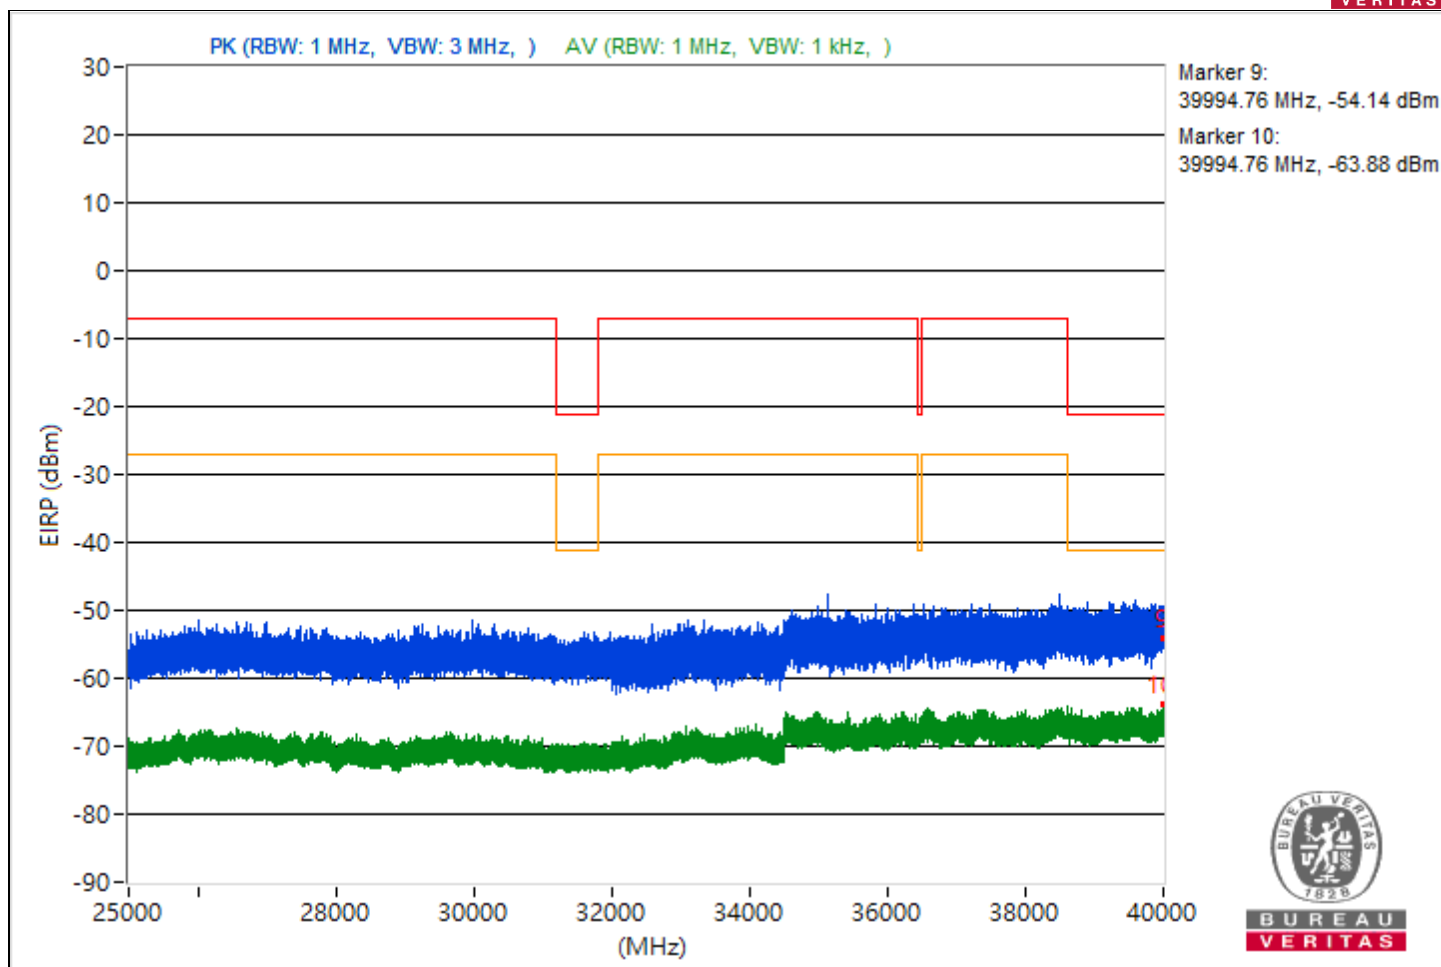



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.36	45.48 PK	74	-28.52	-58.15	8.37	-49.78
2	5449.36	35.93 AV	54	-18.07	-67.7	8.37	-59.33
3	7259.63	48.97 PK	74	-25.03	-54.66	8.37	-46.29
4	7259.63	39.4 AV	54	-14.6	-64.23	8.37	-55.86
5	21370.9	47.06 PK	74	-26.94	-56.57	8.37	-48.2
6	21370.9	34.99 AV	54	-19.01	-68.64	8.37	-60.27
7	23776.6	49.73 PK	74	-24.27	-53.9	8.37	-45.53
8	23776.6	36.49 AV	54	-17.51	-67.14	8.37	-58.77
9	39984.36	42.15 PK	74	-31.85	-61.48	8.37	-53.11
10	39984.36	31.23 AV	54	-22.77	-72.4	8.37	-64.03

Note: Margin value = Emission Level - Limit value

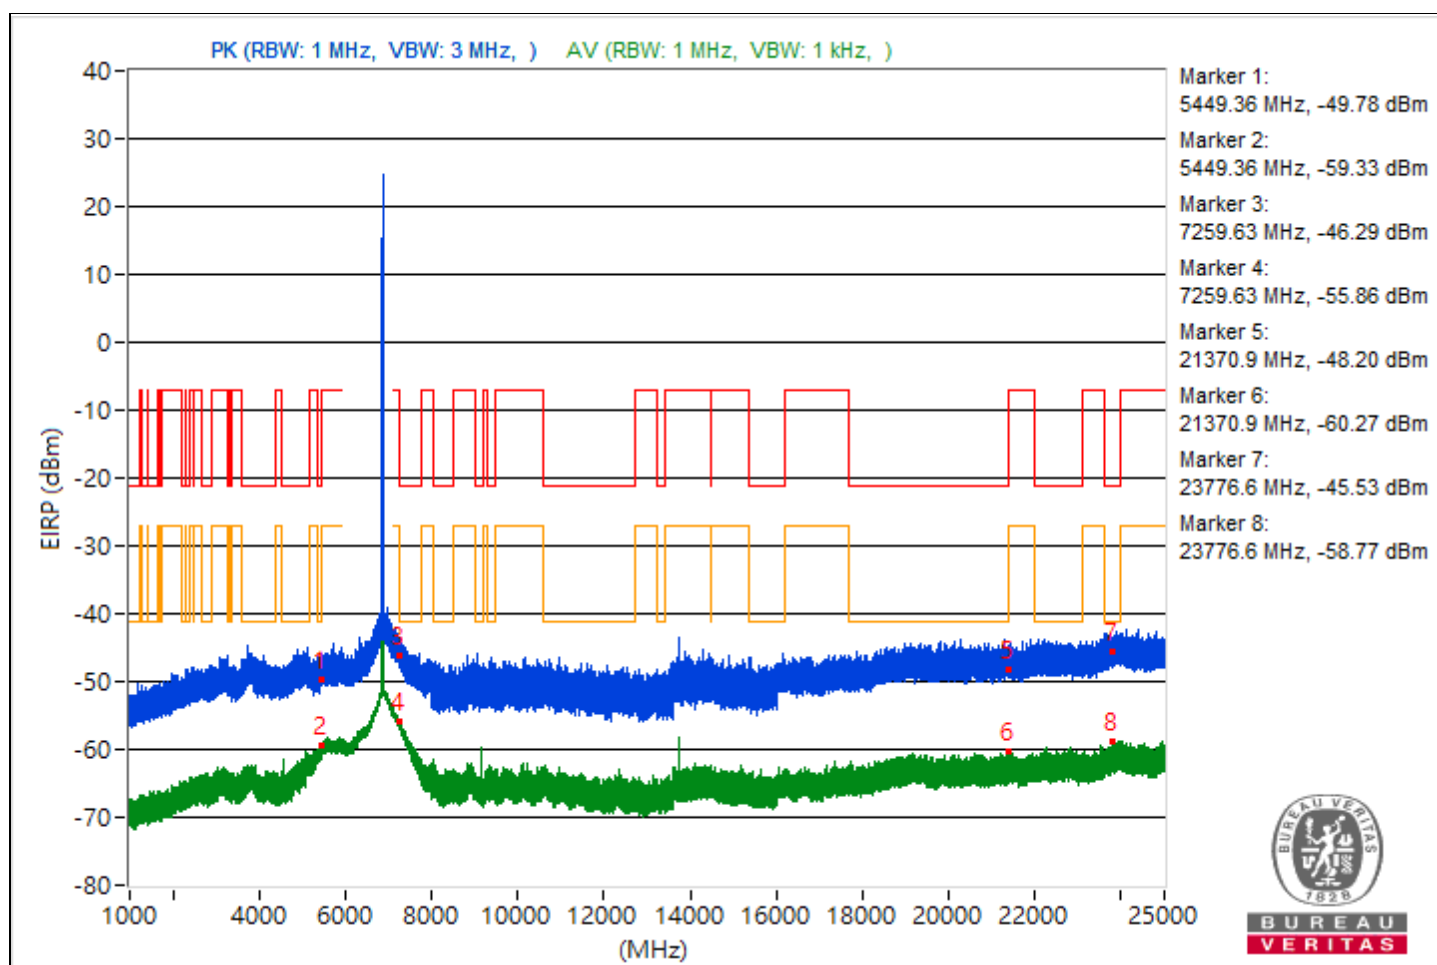

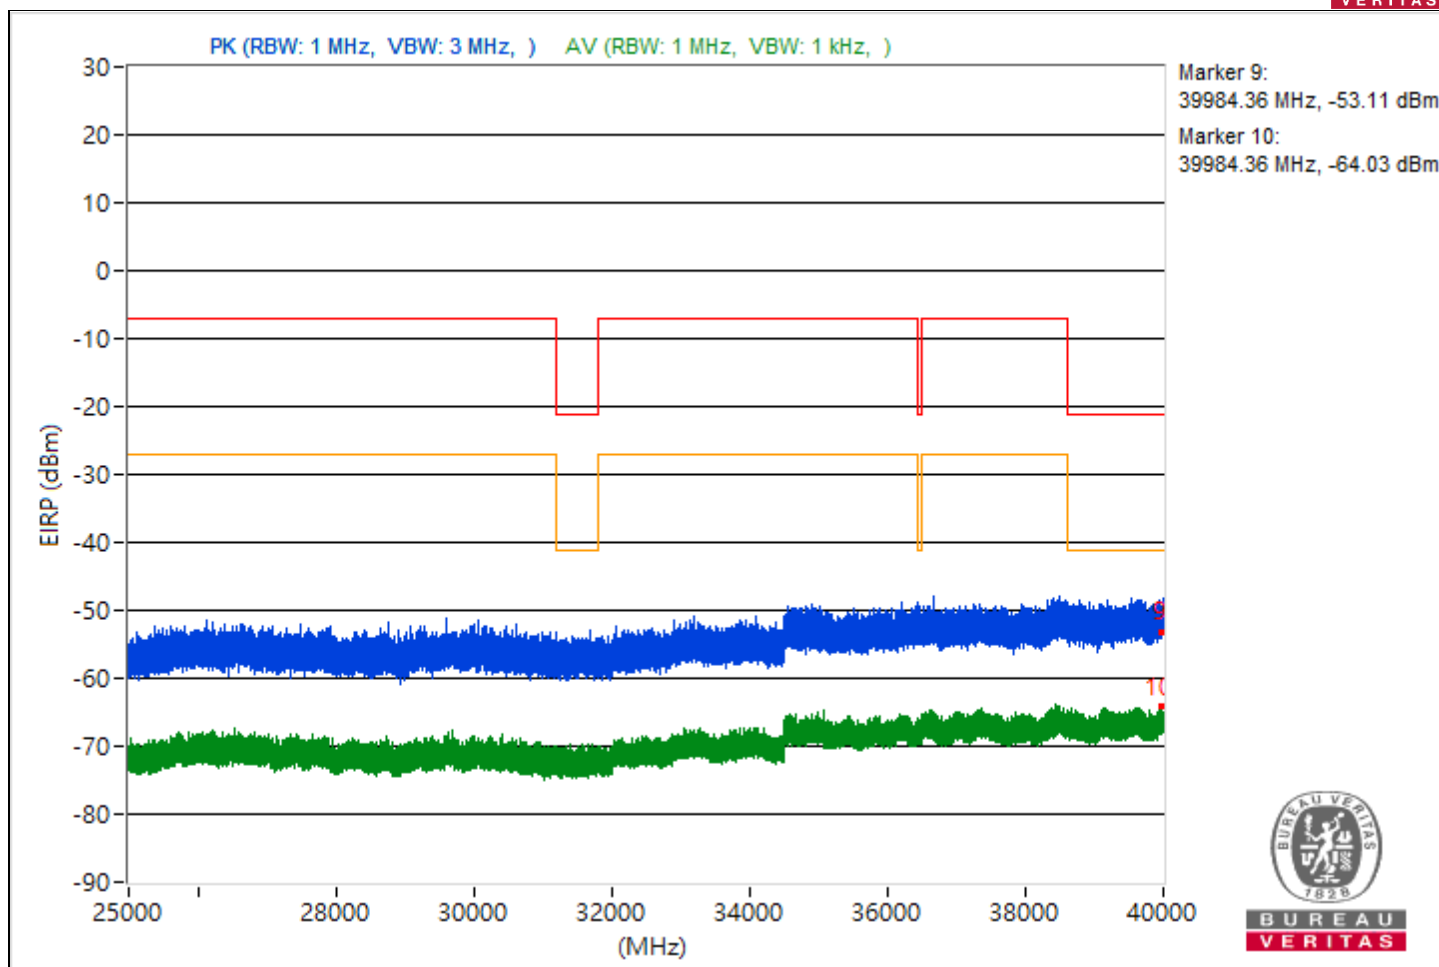



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5441.11	46.36 PK	74	-27.64	-57.27	8.37	-48.9
2	5441.11	39.77 AV	54	-14.23	-63.86	8.37	-55.49
3	#7940.03	53.85 PK	88.26	-34.41	-49.78	8.37	-41.41
4	#7940.03	52.63 AV	68.26	-15.63	-51	8.37	-42.63
5	21330.2	42.79 PK	74	-31.21	-60.84	8.37	-52.47
6	21330.2	34.17 AV	54	-19.83	-69.46	8.37	-61.09
7	23912.1	46.52 PK	74	-27.48	-57.11	8.37	-48.74
8	23912.1	35.97 AV	54	-18.03	-67.66	8.37	-59.29
9	39807.29	36.97 PK	74	-37.03	-66.66	8.37	-58.29
10	39807.29	30.41 AV	54	-23.59	-73.22	8.37	-64.85

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

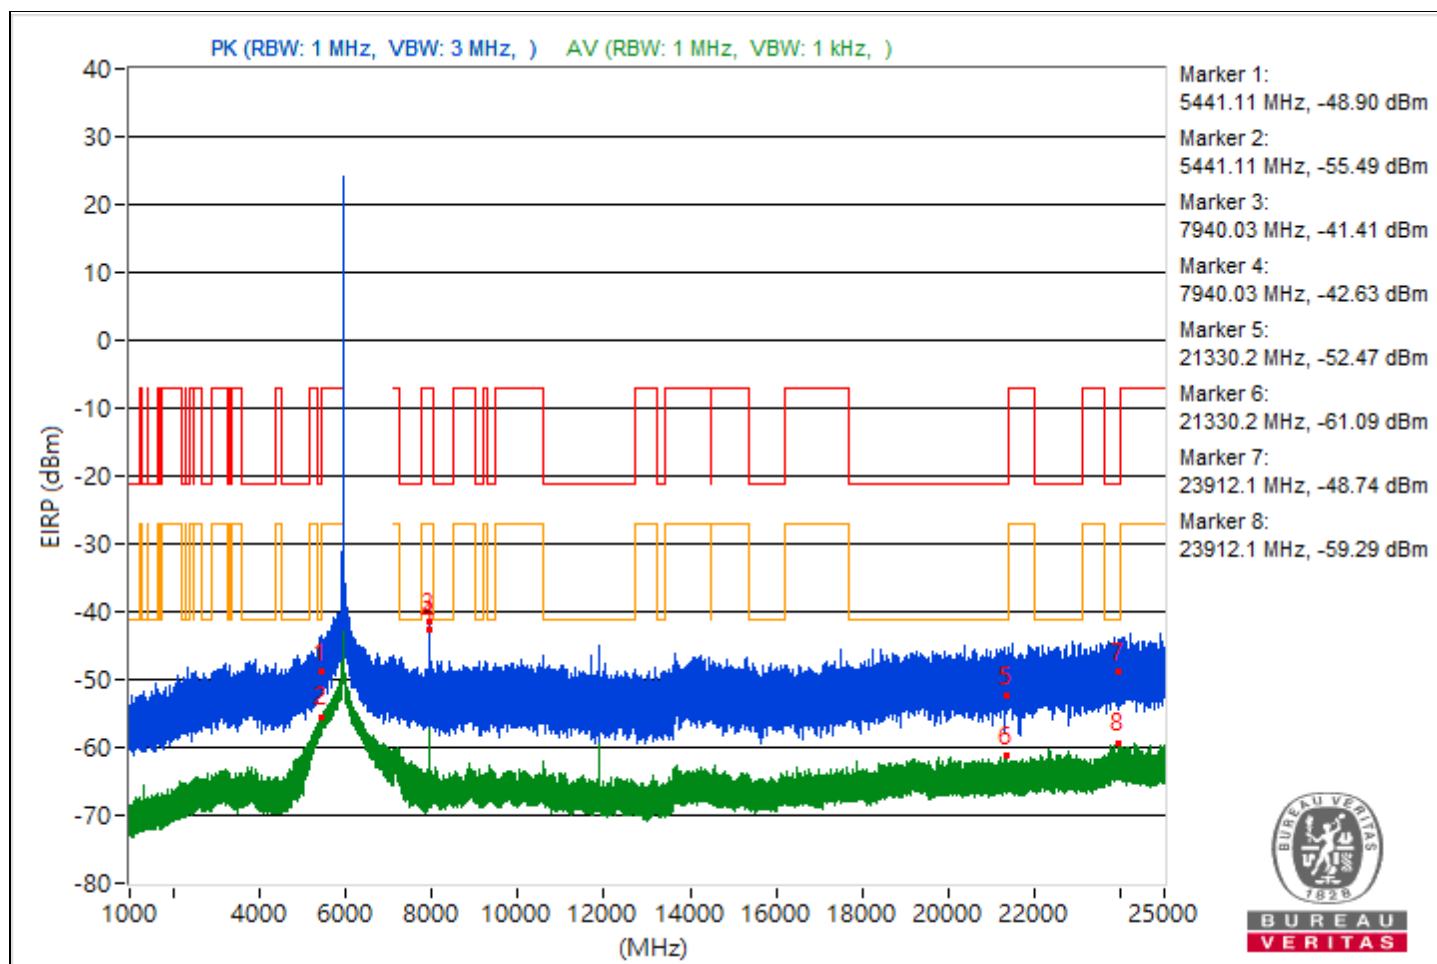


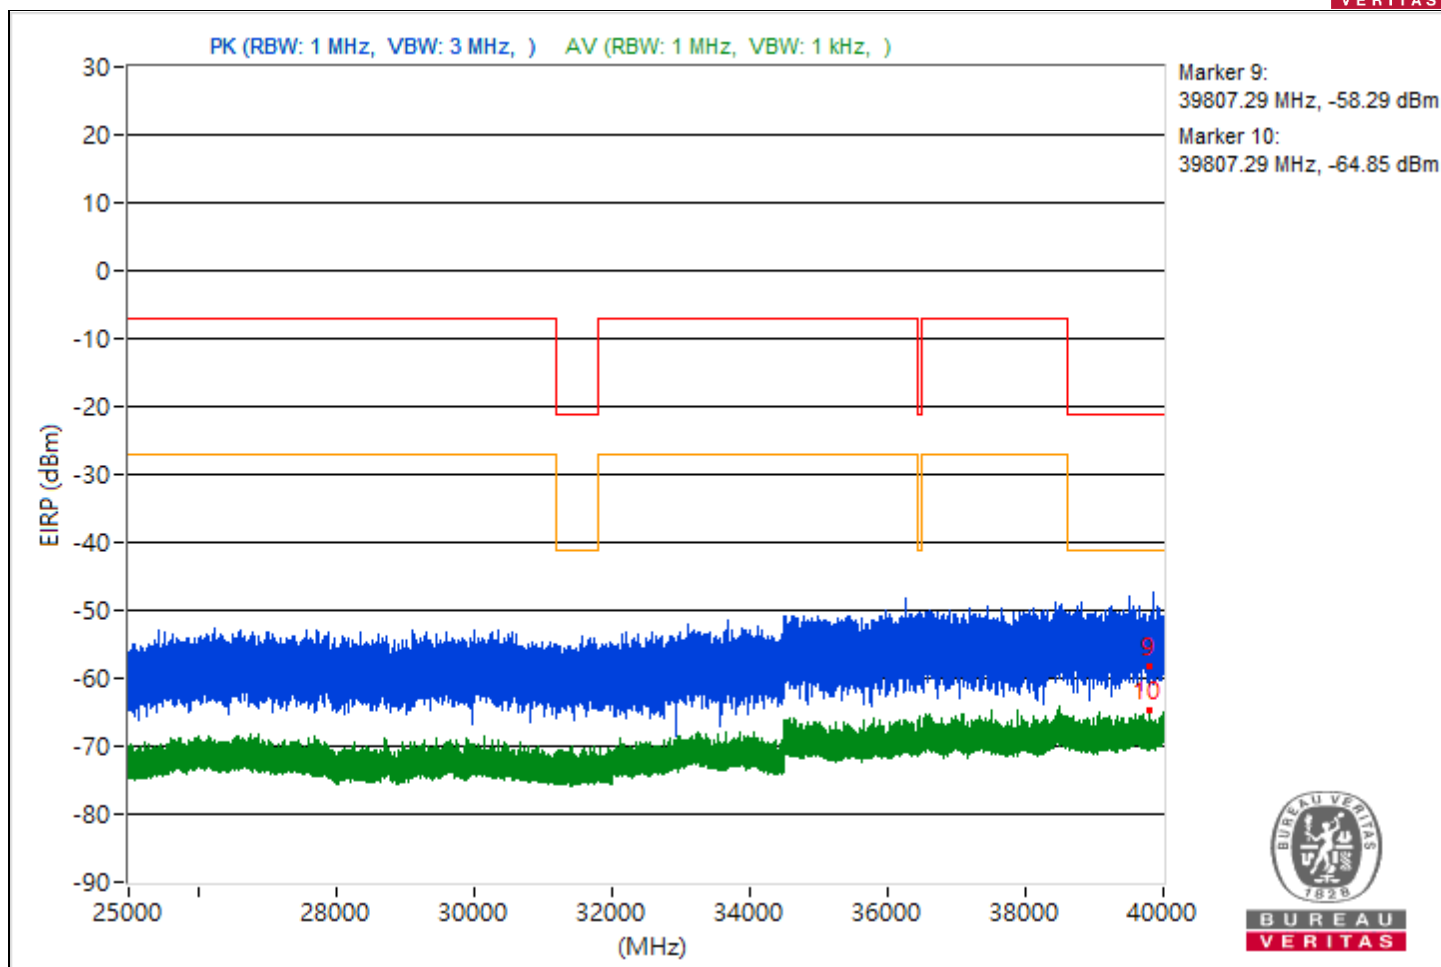

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.7	47.49 PK	74	-26.51	-56.14	8.37	-47.77
2	5459.7	37.94 AV	54	-16.06	-65.69	8.37	-57.32
3	7251.54	45.67 PK	74	-28.33	-57.96	8.37	-49.59
4	7251.54	36.72 AV	54	-17.28	-66.91	8.37	-58.54
5	20177.3	44.26 PK	74	-29.74	-59.37	8.37	-51.00
6	20177.3	34.6 AV	54	-19.4	-69.03	8.37	-60.66
7	23948.9	47.49 PK	74	-26.51	-56.14	8.37	-47.77
8	23948.9	35.88 AV	54	-18.12	-67.75	8.37	-59.38
9	39650.76	43.82 PK	74	-30.18	-59.81	8.37	-51.44
10	39650.76	30.76 AV	54	-23.24	-72.87	8.37	-64.5

Note: Margin value = Emission Level - Limit value

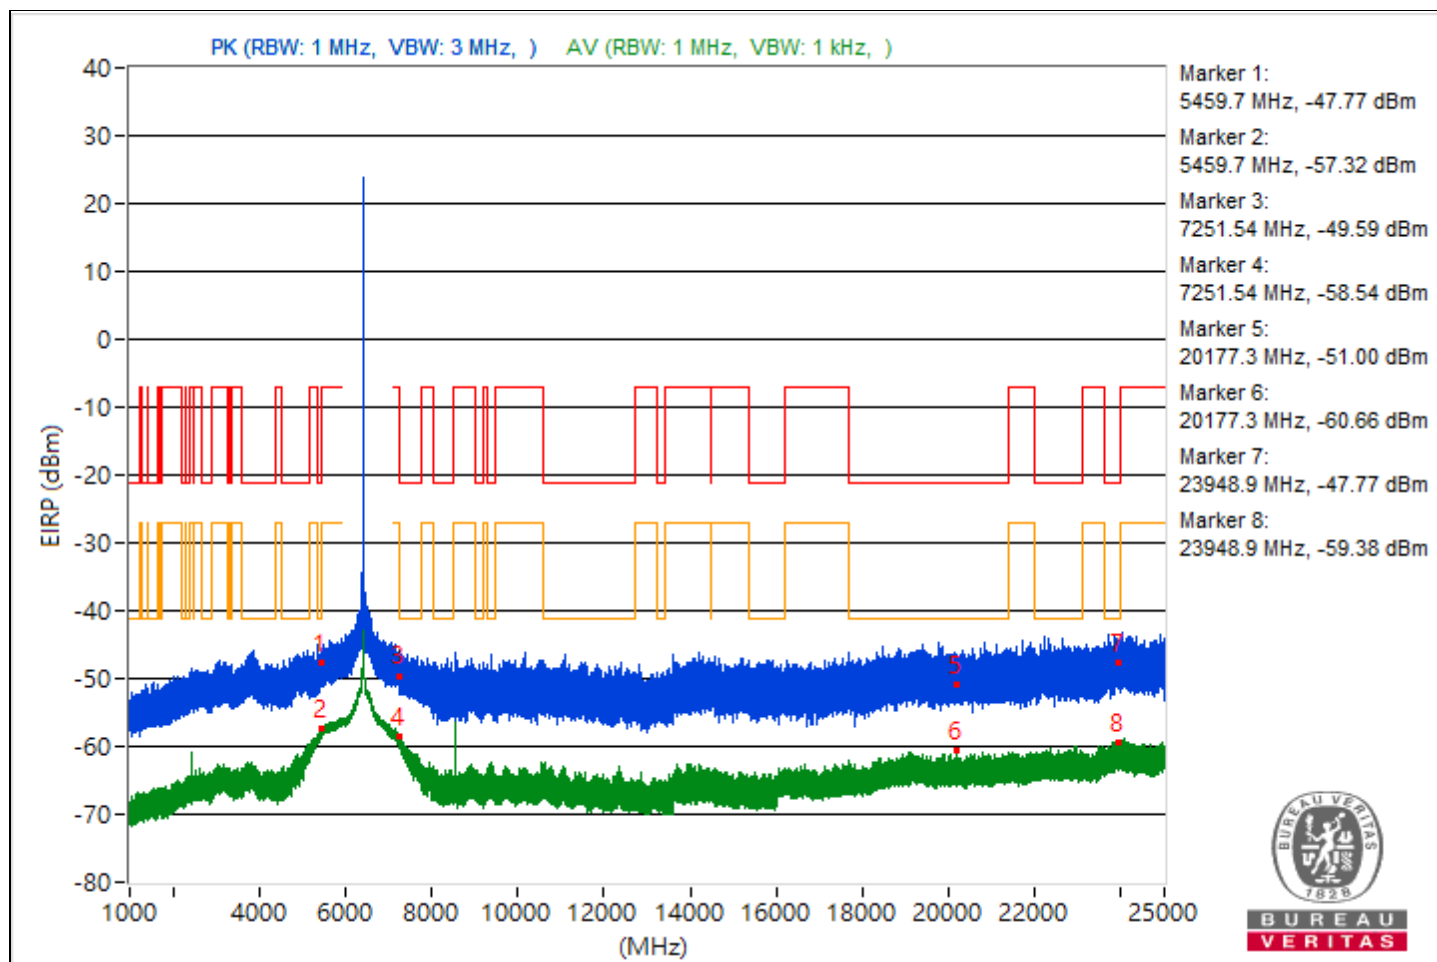





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5427.66	47.32 PK	74	-26.68	-56.31	8.37	-47.94
2	5427.66	36.84 AV	54	-17.16	-66.79	8.37	-58.42
3	7253.33	49.33 PK	74	-24.67	-54.3	8.37	-45.93
4	7253.33	36.65 AV	54	-17.35	-66.98	8.37	-58.61
5	19193.2	48.05 PK	74	-25.95	-55.58	8.37	-47.21
6	19193.2	35.66 AV	54	-18.34	-67.97	8.37	-59.6
7	23930.3	46.38 PK	74	-27.62	-57.25	8.37	-48.88
8	23930.3	36.75 AV	54	-17.25	-66.88	8.37	-58.51
9	39969.42	42.24 PK	74	-31.76	-61.39	8.37	-53.02
10	39969.42	32.02 AV	54	-21.98	-71.61	8.37	-63.24

Note: Margin value = Emission Level - Limit value

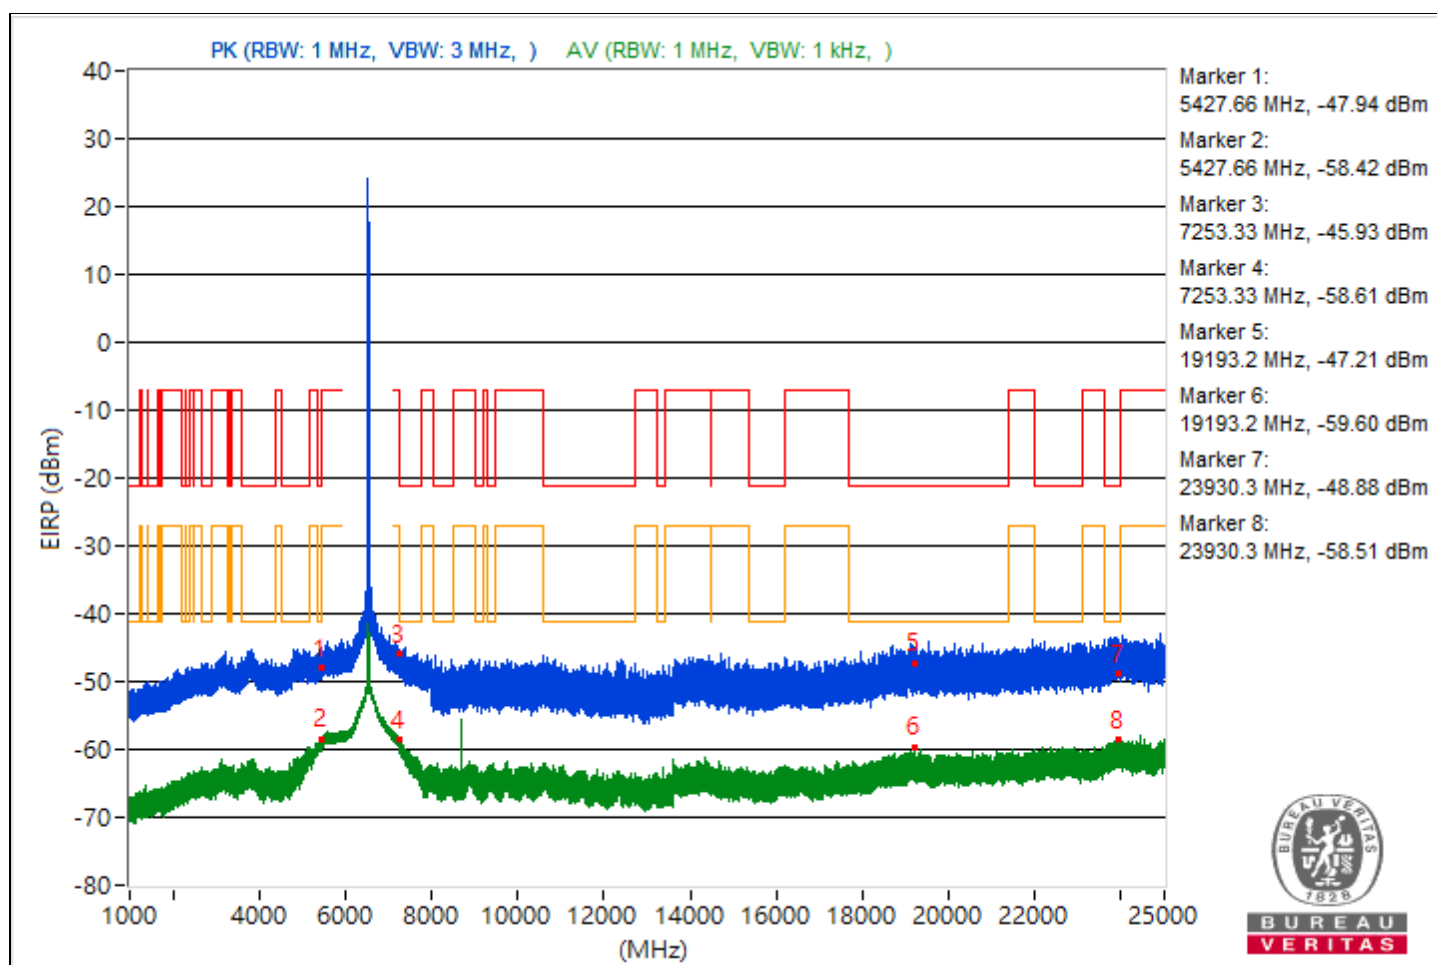


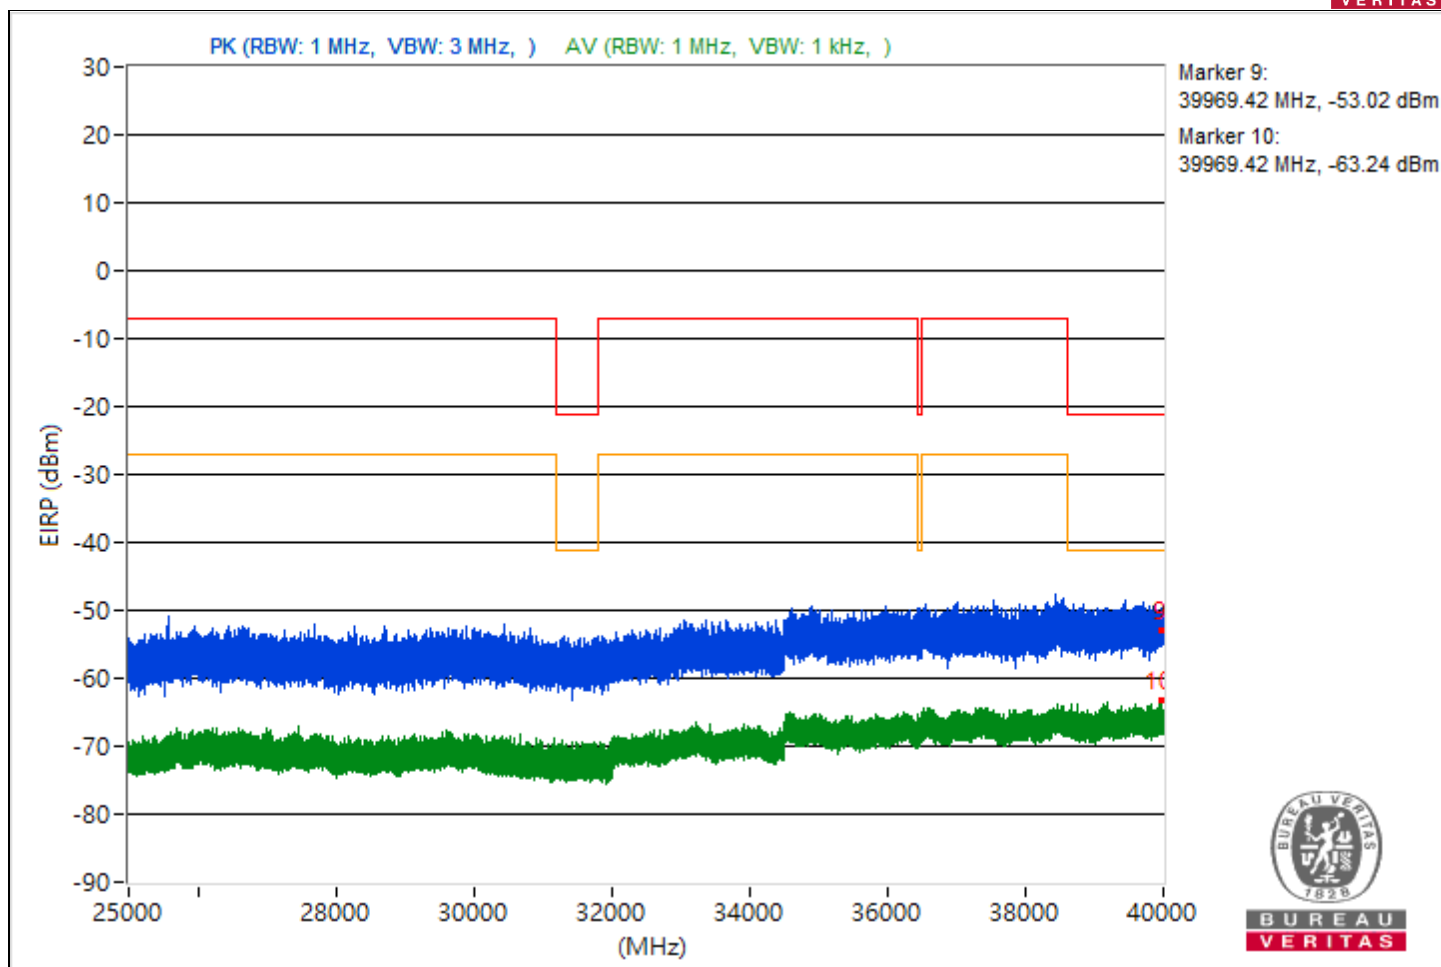


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.71	43.35 PK	74	-30.65	-60.28	8.37	-51.91
2	5453.71	35.59 AV	54	-18.41	-68.04	8.37	-59.67
3	7250.22	44.98 PK	74	-29.02	-58.65	8.37	-50.28
4	7250.22	39.25 AV	54	-14.75	-64.38	8.37	-56.01
5	21102.4	42.67 PK	74	-31.33	-60.96	8.37	-52.59
6	21102.4	34.08 AV	54	-19.92	-69.55	8.37	-61.18
7	23899.4	46.02 PK	74	-27.98	-57.61	8.37	-49.24
8	23899.4	35.63 AV	54	-18.37	-68	8.37	-59.63
9	39383.56	41.12 PK	74	-32.88	-62.51	8.37	-54.14
10	39383.56	30.74 AV	54	-23.26	-72.89	8.37	-64.52

Note: Margin value = Emission Level - Limit value

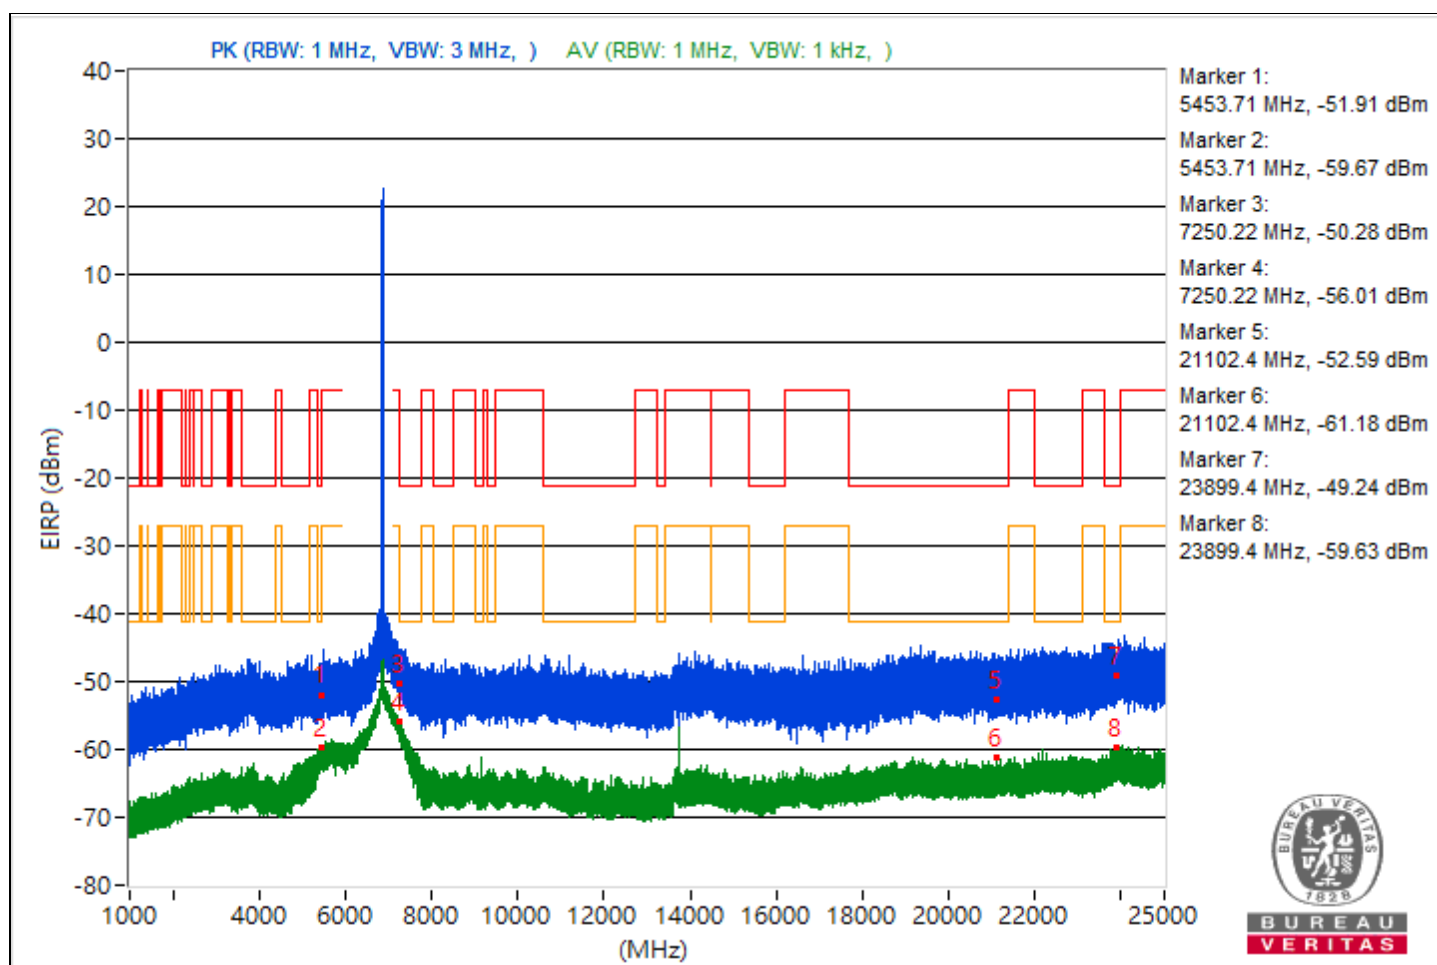


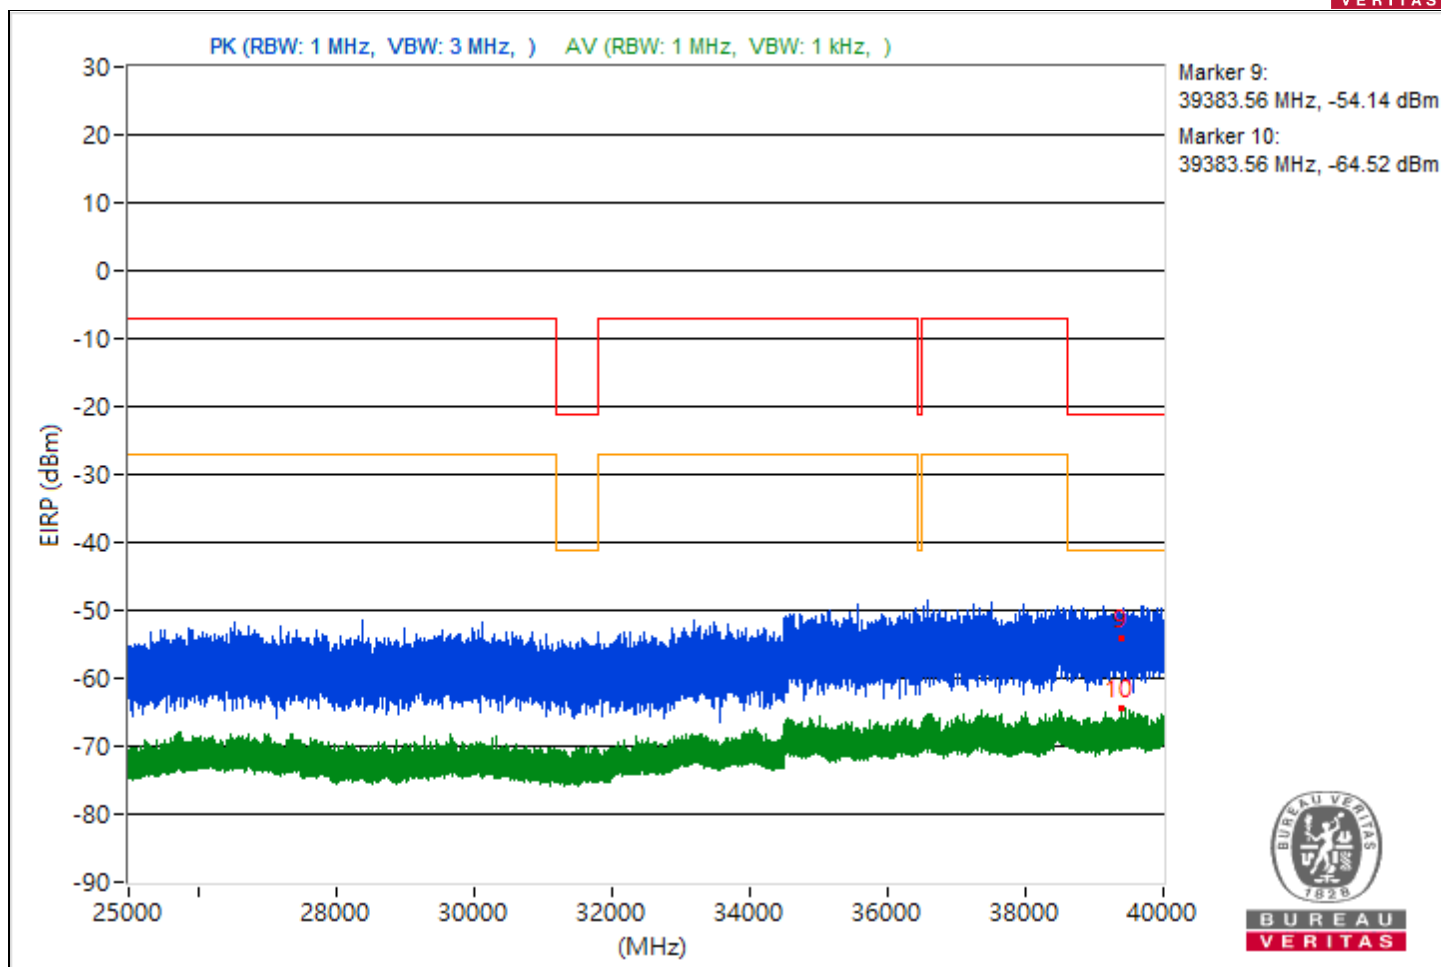


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.3	44.55 PK	74	-29.45	-59.08	8.37	-50.71
2	5458.3	39.84 AV	54	-14.16	-63.79	8.37	-55.42
3	11898.67	48.42 PK	74	-25.58	-55.21	8.37	-46.84
4	11898.67	40.96 AV	54	-13.04	-62.67	8.37	-54.3
5	21392.6	45.86 PK	74	-28.14	-57.77	8.37	-49.4
6	21392.6	34.19 AV	54	-19.81	-69.44	8.37	-61.07
7	23980.6	48.96 PK	74	-25.04	-54.67	8.37	-46.3
8	23980.6	35.64 AV	54	-18.36	-67.99	8.37	-59.62
9	39677.6	38.16 PK	74	-35.84	-65.47	8.37	-57.1
10	39677.6	30.87 AV	54	-23.13	-72.76	8.37	-64.39

Note: Margin value = Emission Level - Limit value

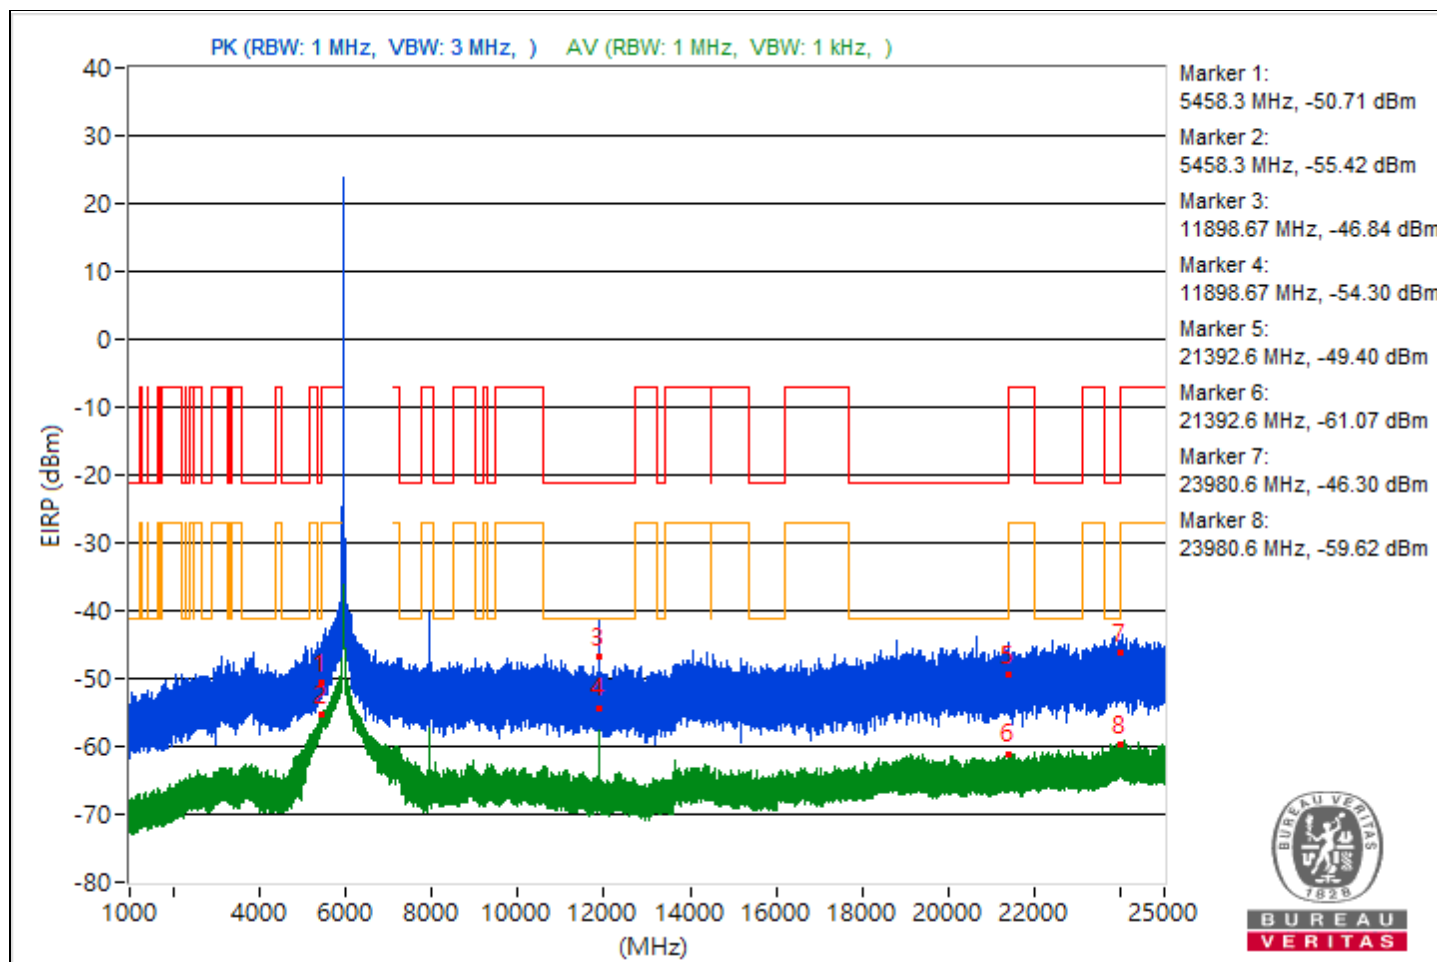


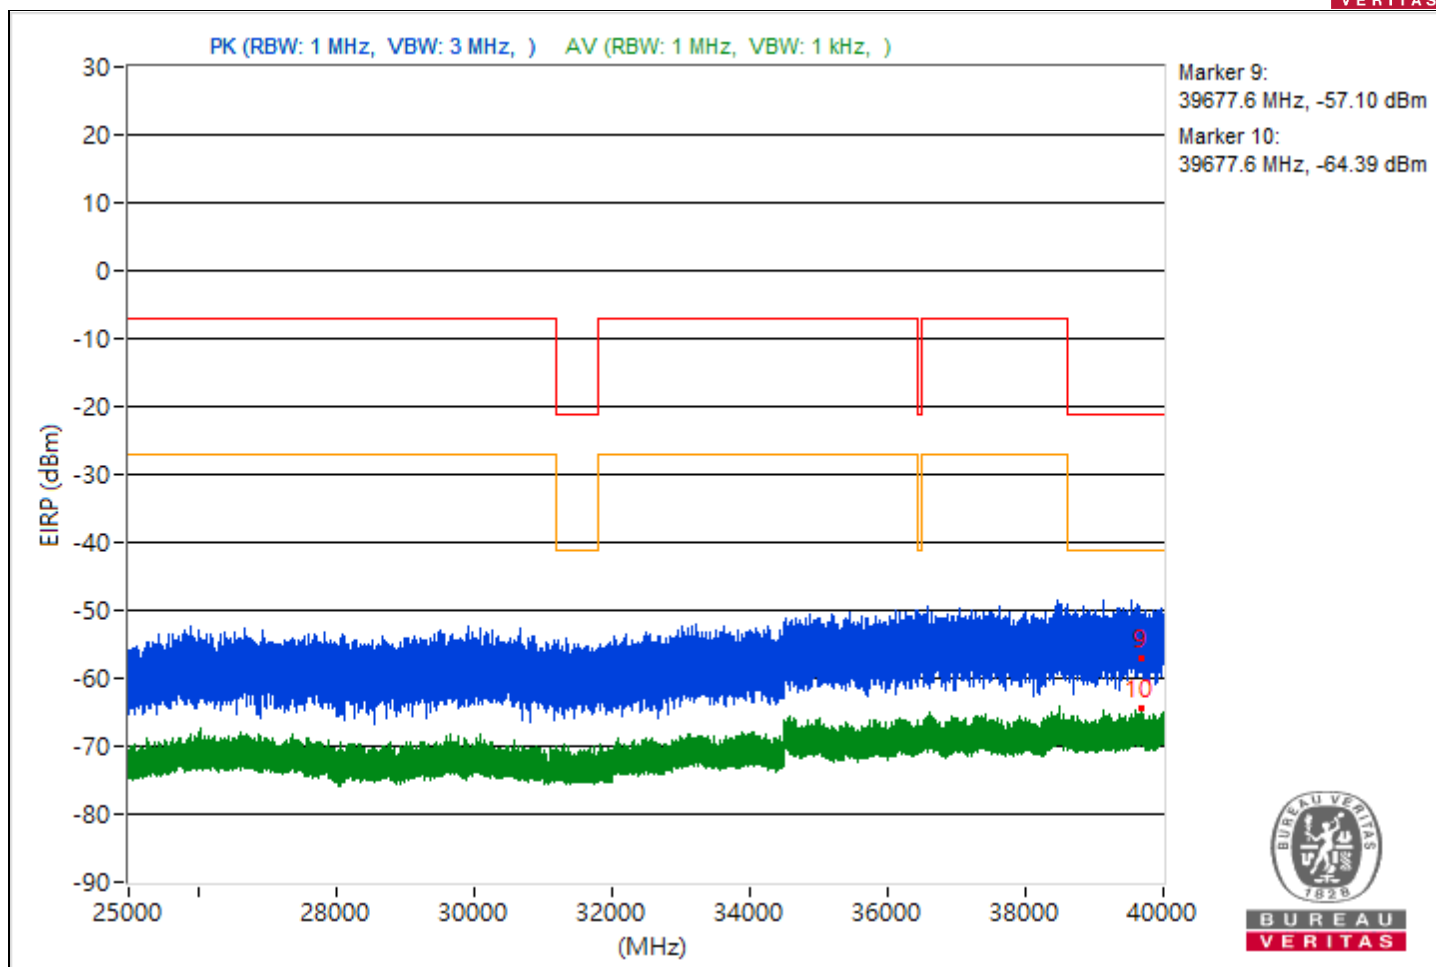


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.28	46.11 PK	74	-27.89	-57.52	8.37	-49.15
2	5456.28	37.45 AV	54	-16.55	-66.18	8.37	-57.81
3	7257.92	48.23 PK	74	-25.77	-55.4	8.37	-47.03
4	7257.92	36.41 AV	54	-17.59	-67.22	8.37	-58.85
5	21220.8	45.88 PK	74	-28.12	-57.75	8.37	-49.38
6	21220.8	34.65 AV	54	-19.35	-68.98	8.37	-60.61
7	23925.6	48.76 PK	74	-25.24	-54.87	8.37	-46.5
8	23925.6	35.54 AV	54	-18.46	-68.09	8.37	-59.72
9	39563.82	41.83 PK	74	-32.17	-61.8	8.37	-53.43
10	39563.82	31.02 AV	54	-22.98	-72.61	8.37	-64.24

Note: Margin value = Emission Level - Limit value

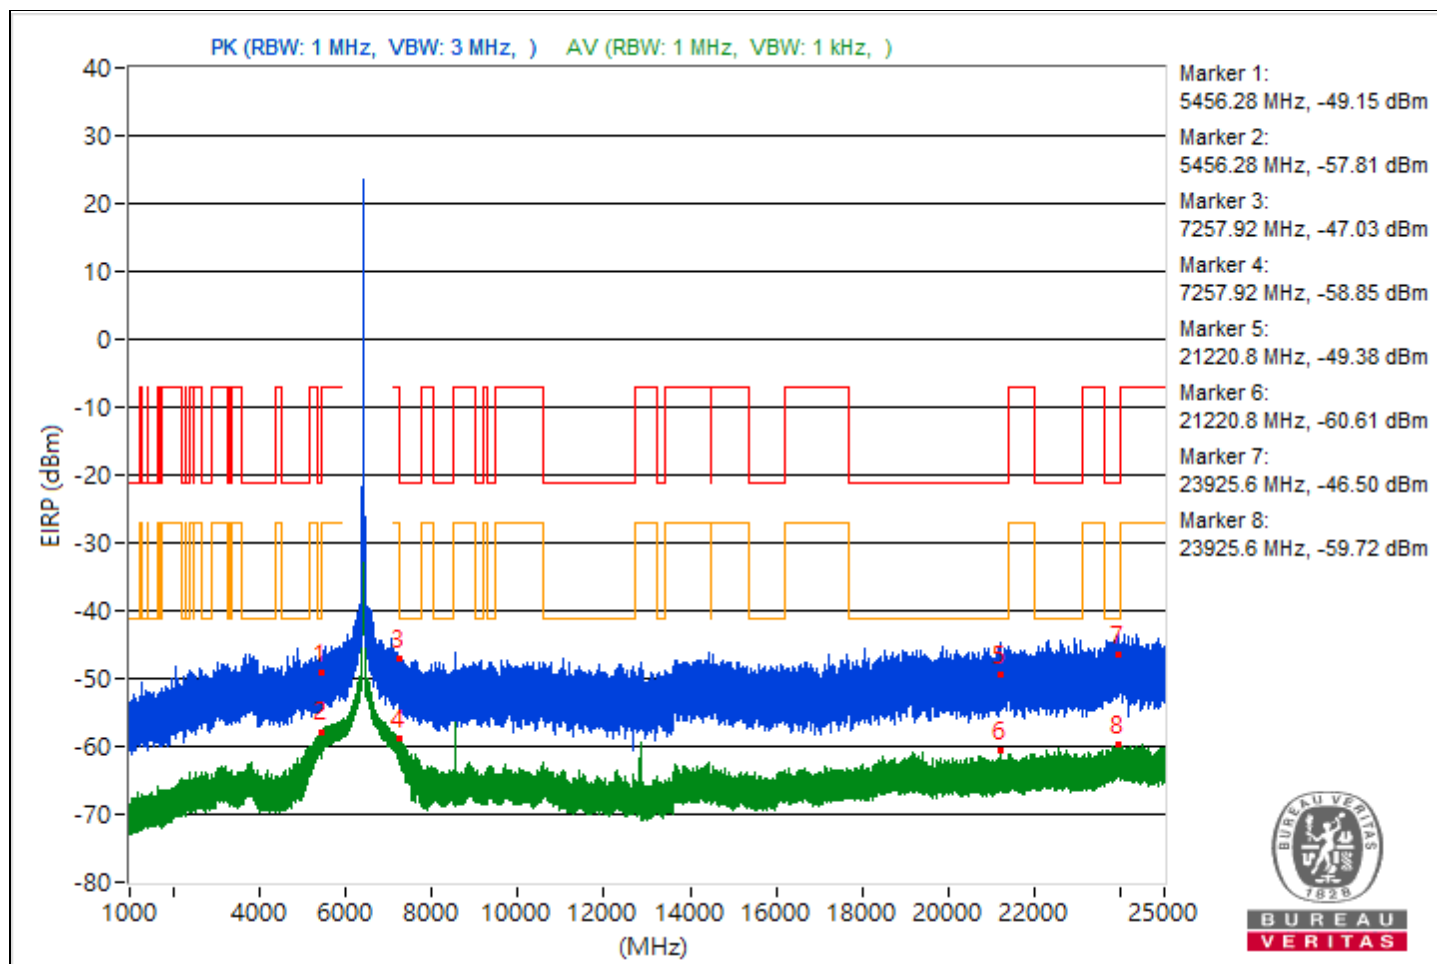


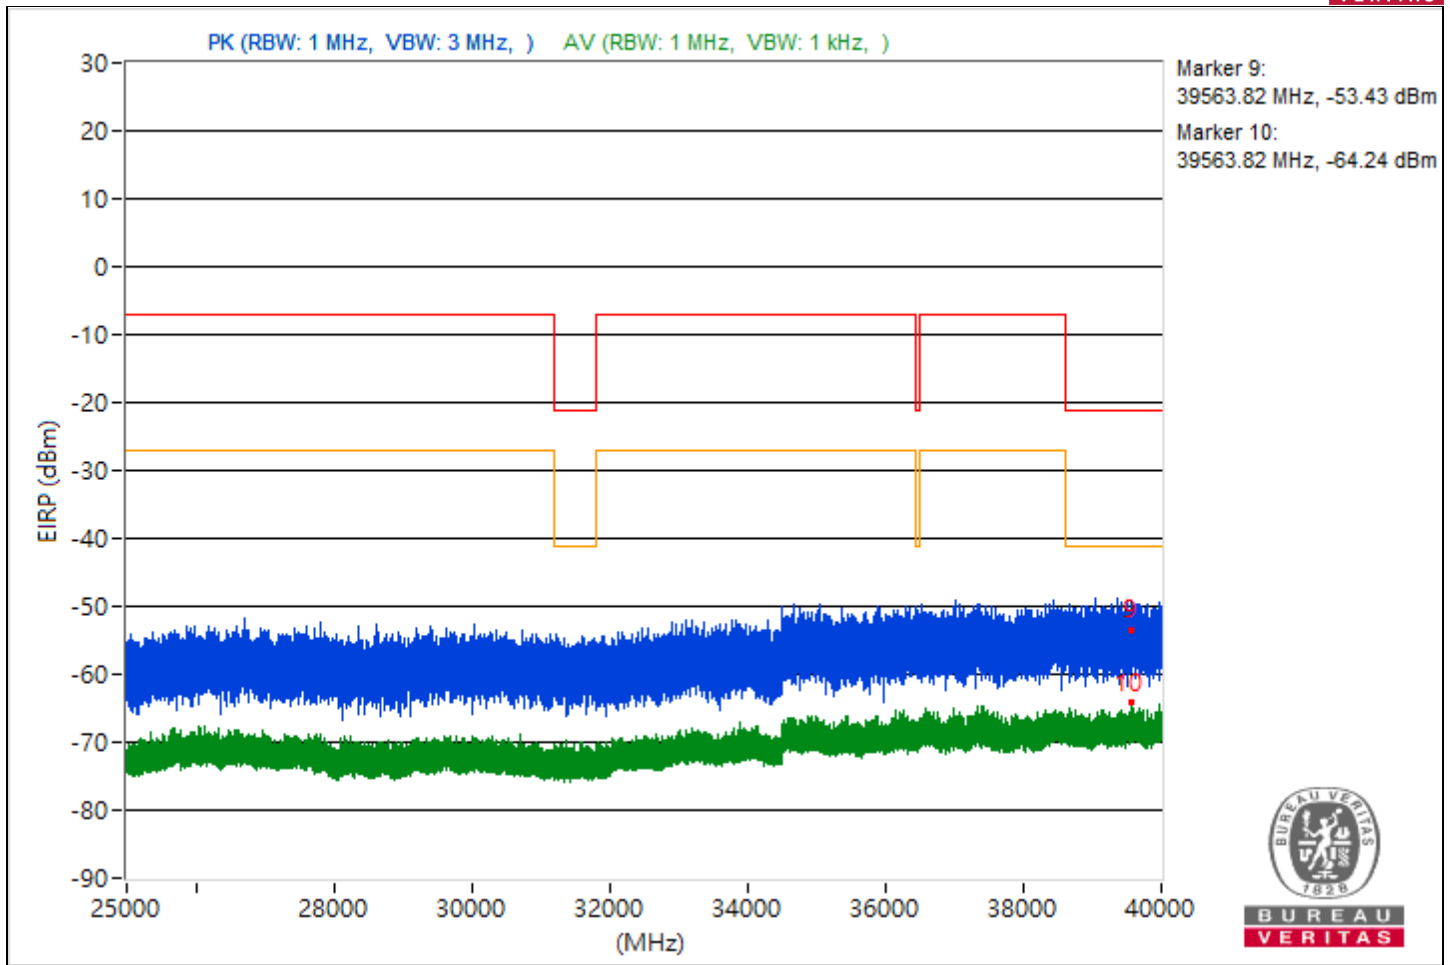

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.57	47.81 PK	74	-26.19	-55.82	8.37	-47.45
2	5454.57	36.67 AV	54	-17.33	-66.96	8.37	-58.59
3	7252.71	46.48 PK	74	-27.52	-57.15	8.37	-48.78
4	7252.71	36.59 AV	54	-17.41	-67.04	8.37	-58.67
5	20648.1	43.21 PK	74	-30.79	-60.42	8.37	-52.05
6	20648.1	34.39 AV	54	-19.61	-69.24	8.37	-60.87
7	23999	45.62 PK	74	-28.38	-58.01	8.37	-49.64
8	23999	36.22 AV	54	-17.78	-67.41	8.37	-59.04
9	39546.58	36.11 PK	74	-37.89	-67.52	8.37	-59.15
10	39546.58	30.3 AV	54	-23.7	-73.33	8.37	-64.96

Note: Margin value = Emission Level - Limit value

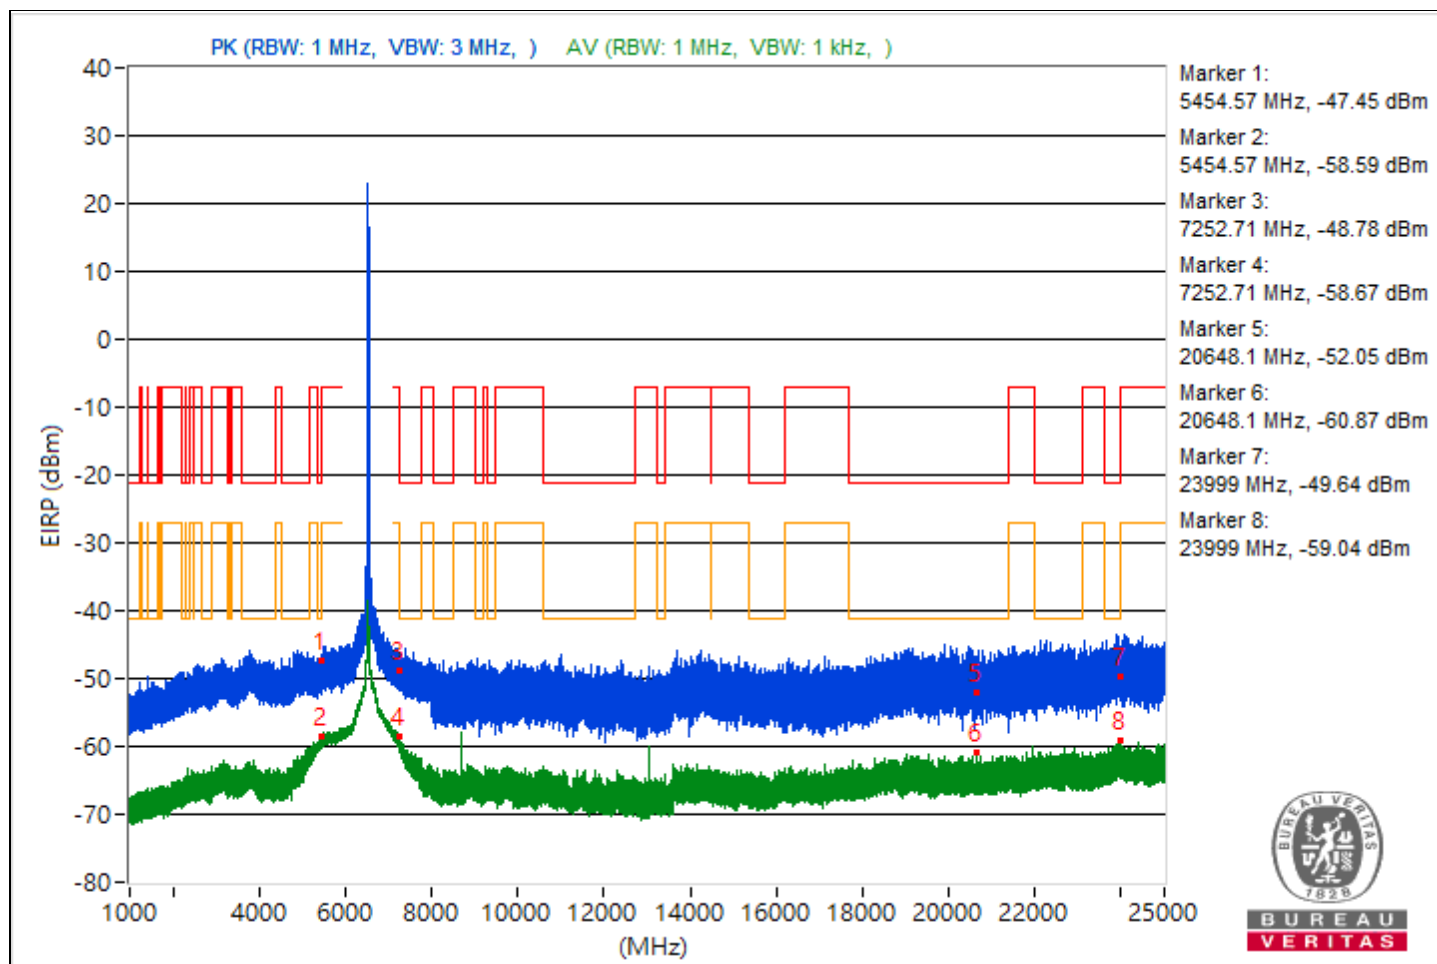





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5441.81	43.28 PK	74	-30.72	-60.35	8.37	-51.98
2	5441.81	35.54 AV	54	-18.46	-68.09	8.37	-59.72
3	7256.99	45.92 PK	74	-28.08	-57.71	8.37	-49.34
4	7256.99	39.59 AV	54	-14.41	-64.04	8.37	-55.67
5	21117.9	45.75 PK	74	-28.25	-57.88	8.37	-49.51
6	21117.9	34.12 AV	54	-19.88	-69.51	8.37	-61.14
7	23966.3	51.32 PK	74	-22.68	-52.31	8.37	-43.94
8	23966.3	35.48 AV	54	-18.52	-68.15	8.37	-59.78
9	39591.64	40.17 PK	74	-33.83	-63.46	8.37	-55.09
10	39591.64	30.67 AV	54	-23.33	-72.96	8.37	-64.59

Note: Margin value = Emission Level - Limit value

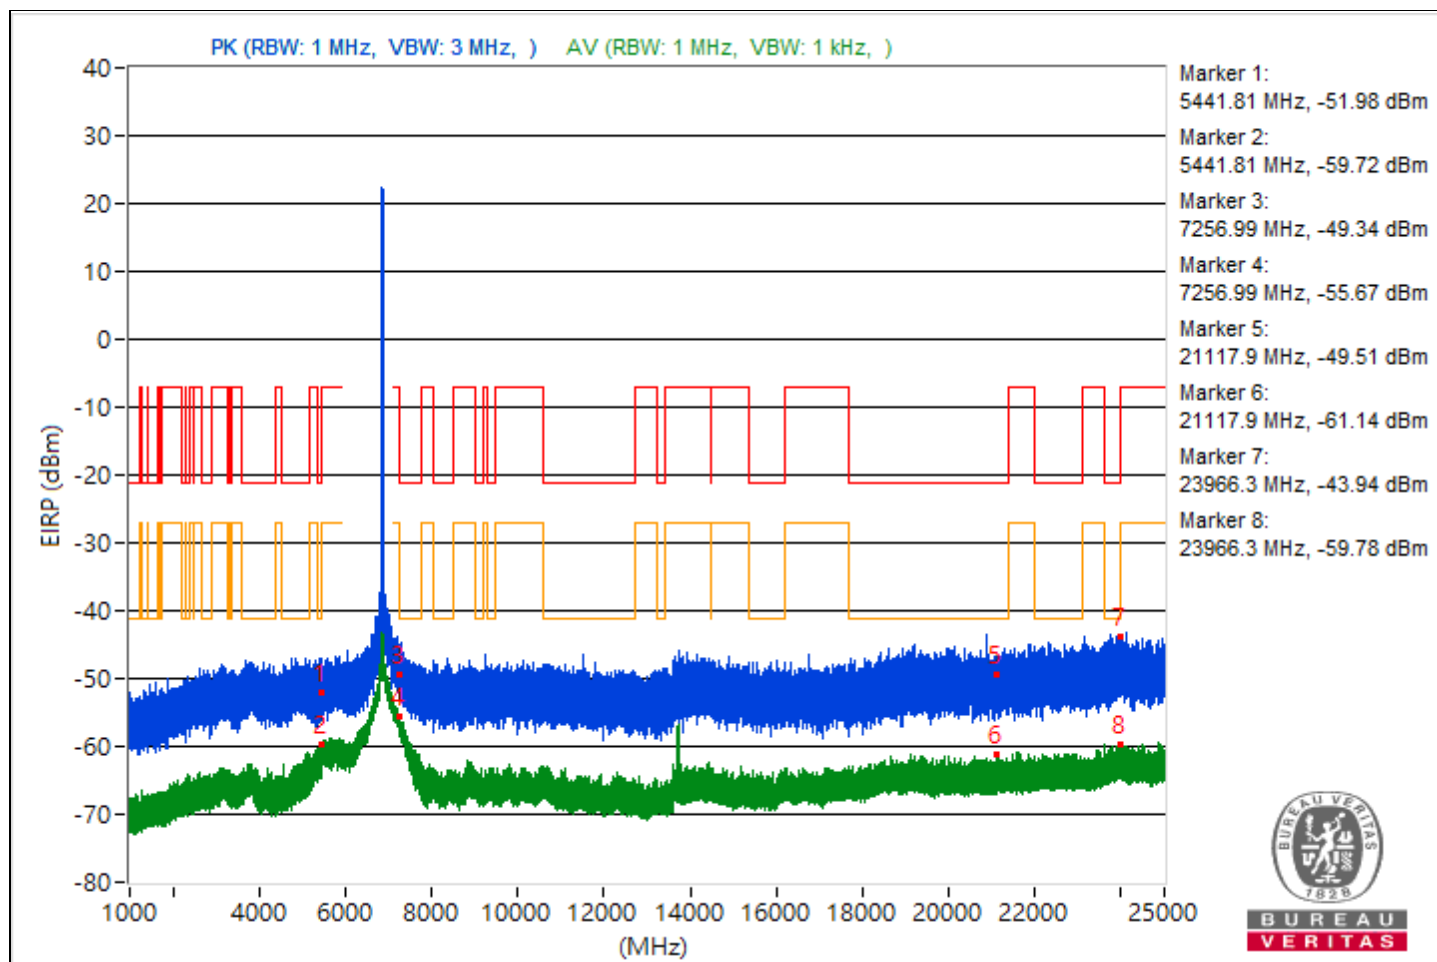


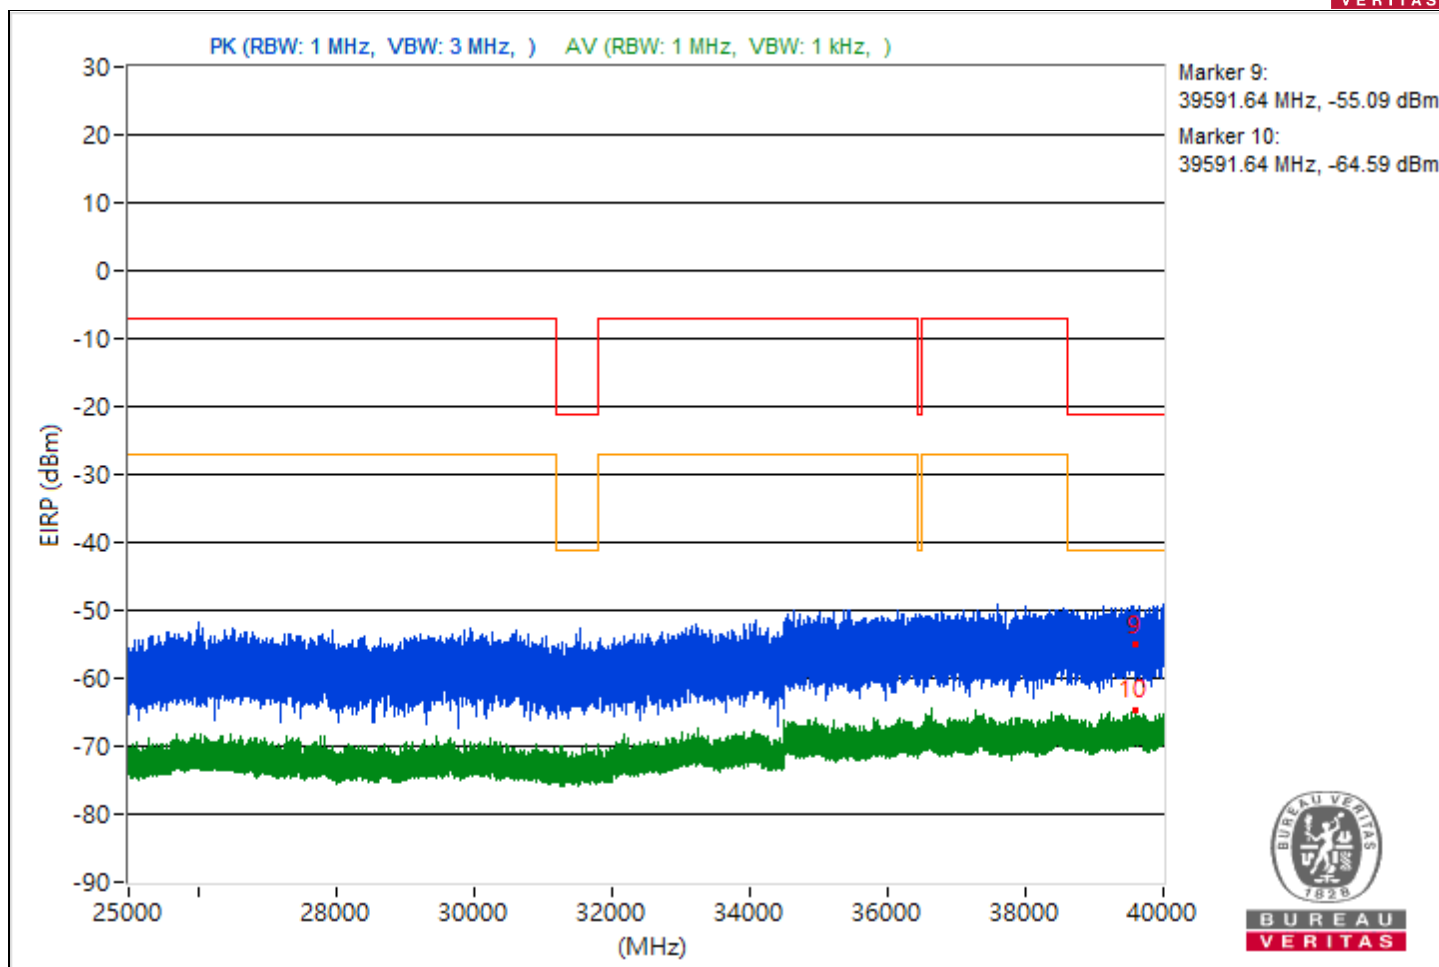


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.32	49.63 PK	74	-24.37	-54	8.37	-45.63
2	5453.32	39.78 AV	54	-14.22	-63.85	8.37	-55.48
3	11900.71	49.59 PK	74	-24.41	-54.04	8.37	-45.67
4	11900.71	40.6 AV	54	-13.4	-63.03	8.37	-54.66
5	21177	44.49 PK	74	-29.51	-59.14	8.37	-50.77
6	21177	34.19 AV	54	-19.81	-69.44	8.37	-61.07
7	23736.6	45.81 PK	74	-28.19	-57.82	8.37	-49.45
8	23736.6	36.24 AV	54	-17.76	-67.39	8.37	-59.02
9	39637.87	40.67 PK	74	-33.33	-62.96	8.37	-54.59
10	39637.87	30.7 AV	54	-23.3	-72.93	8.37	-64.56

Note: Margin value = Emission Level - Limit value

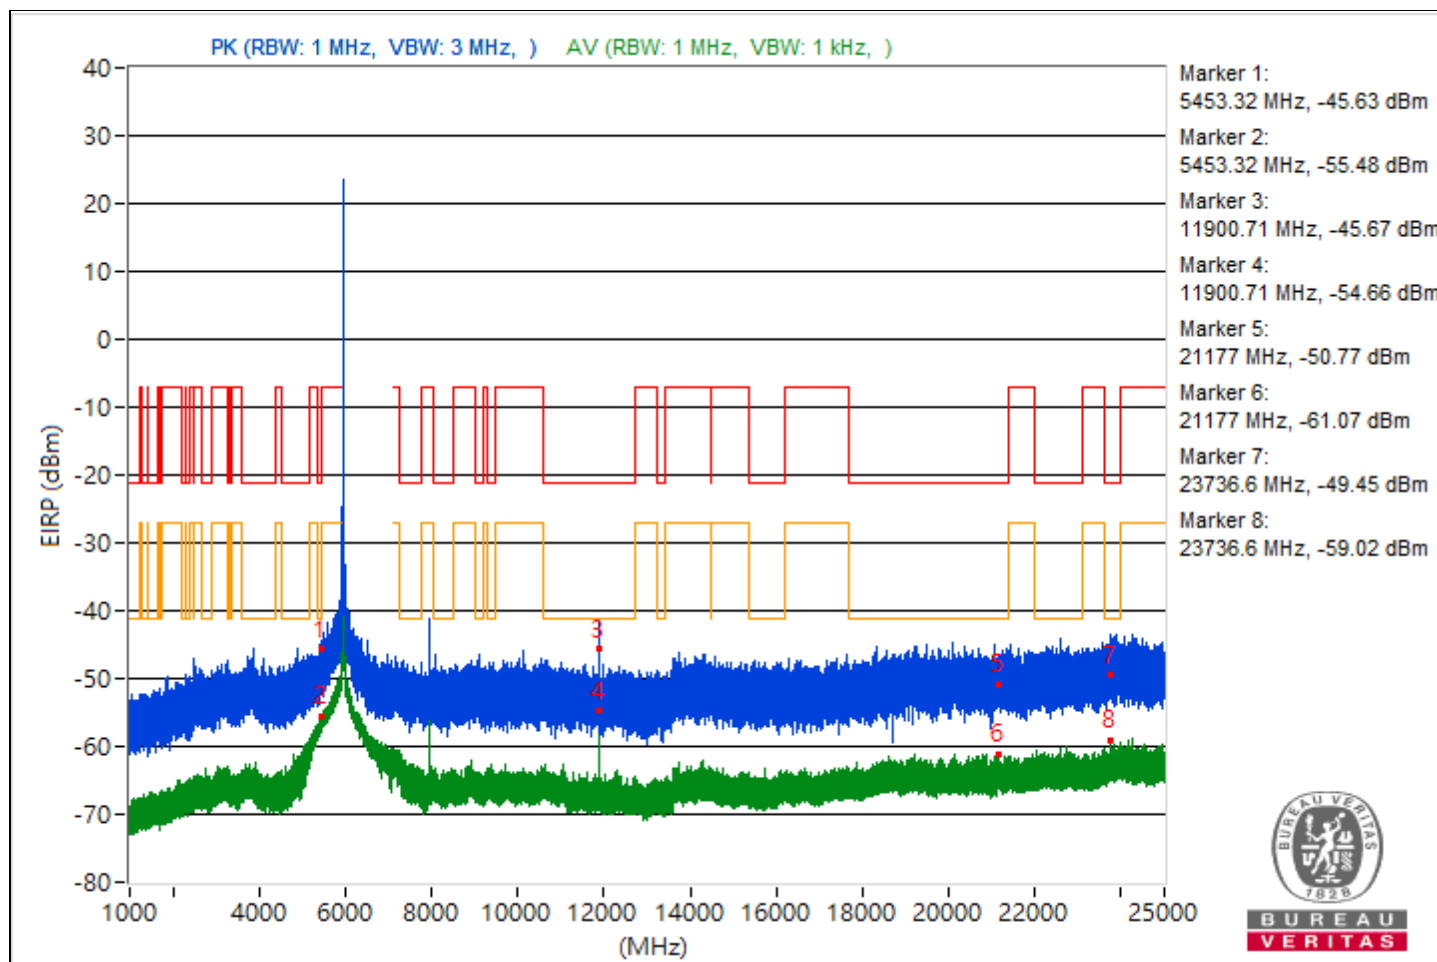


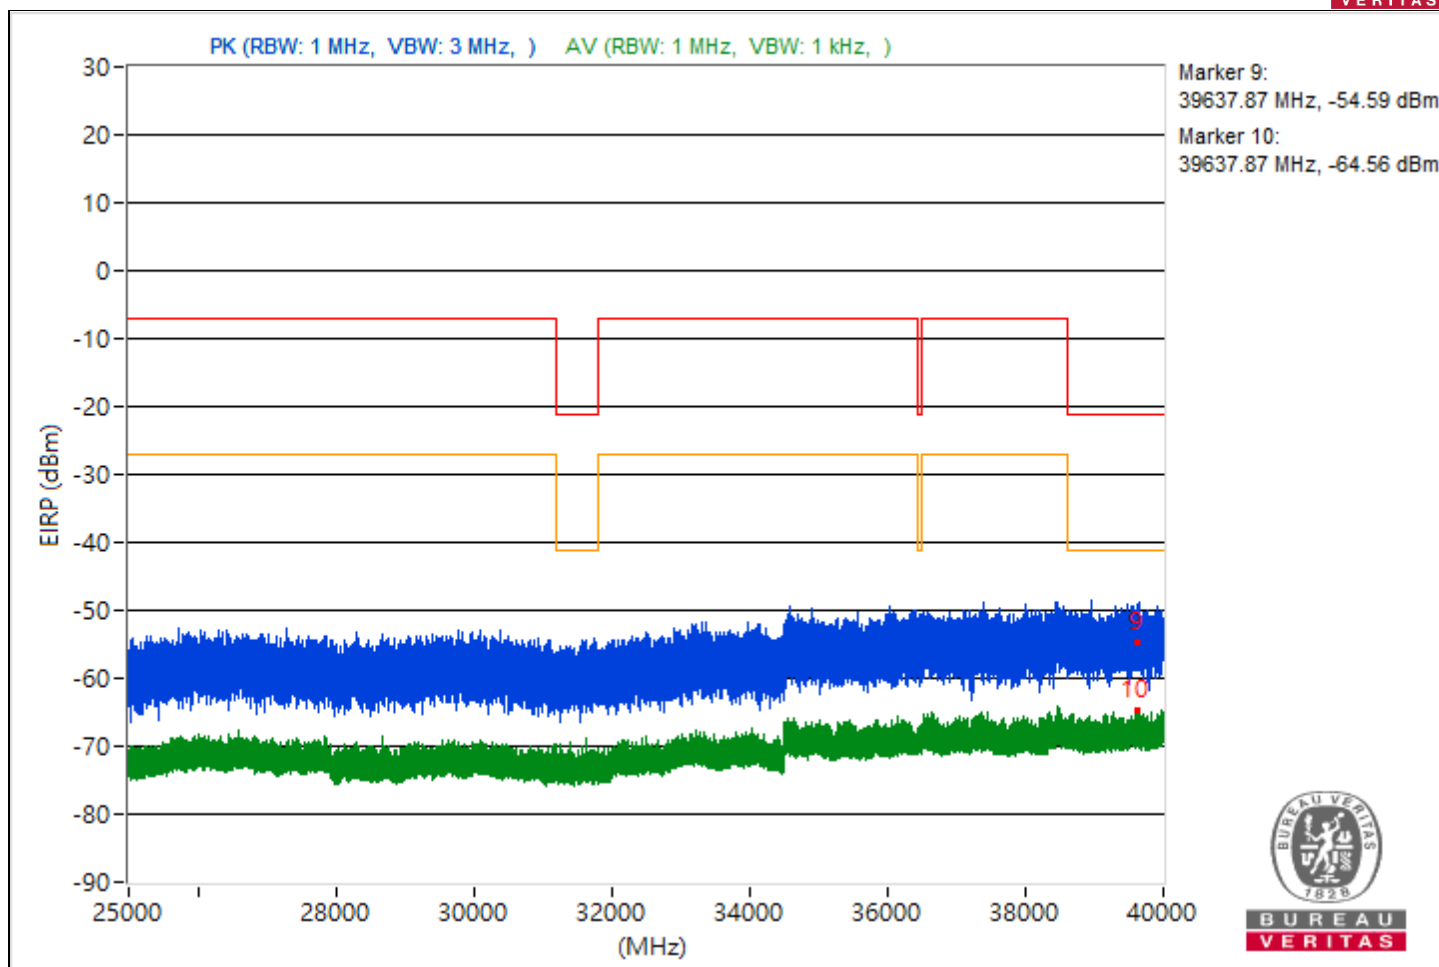


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.83	46.82 PK	74	-27.18	-56.81	8.37	-48.44
2	5457.83	37.66 AV	54	-16.34	-65.97	8.37	-57.6
3	7276.67	44.07 PK	74	-29.93	-59.56	8.37	-51.19
4	7276.67	36.47 AV	54	-17.53	-67.16	8.37	-58.79
5	20775.2	44.04 PK	74	-29.96	-59.59	8.37	-51.22
6	20775.2	33.99 AV	54	-20.01	-69.64	8.37	-61.27
7	22754.2	44.55 PK	74	-29.45	-59.08	8.37	-50.71
8	22754.2	35.3 AV	54	-18.7	-68.33	8.37	-59.96
9	39609.42	45.08 PK	74	-28.92	-58.55	8.37	-50.18
10	39609.42	31.16 AV	54	-22.84	-72.47	8.37	-64.1

Note: Margin value = Emission Level - Limit value

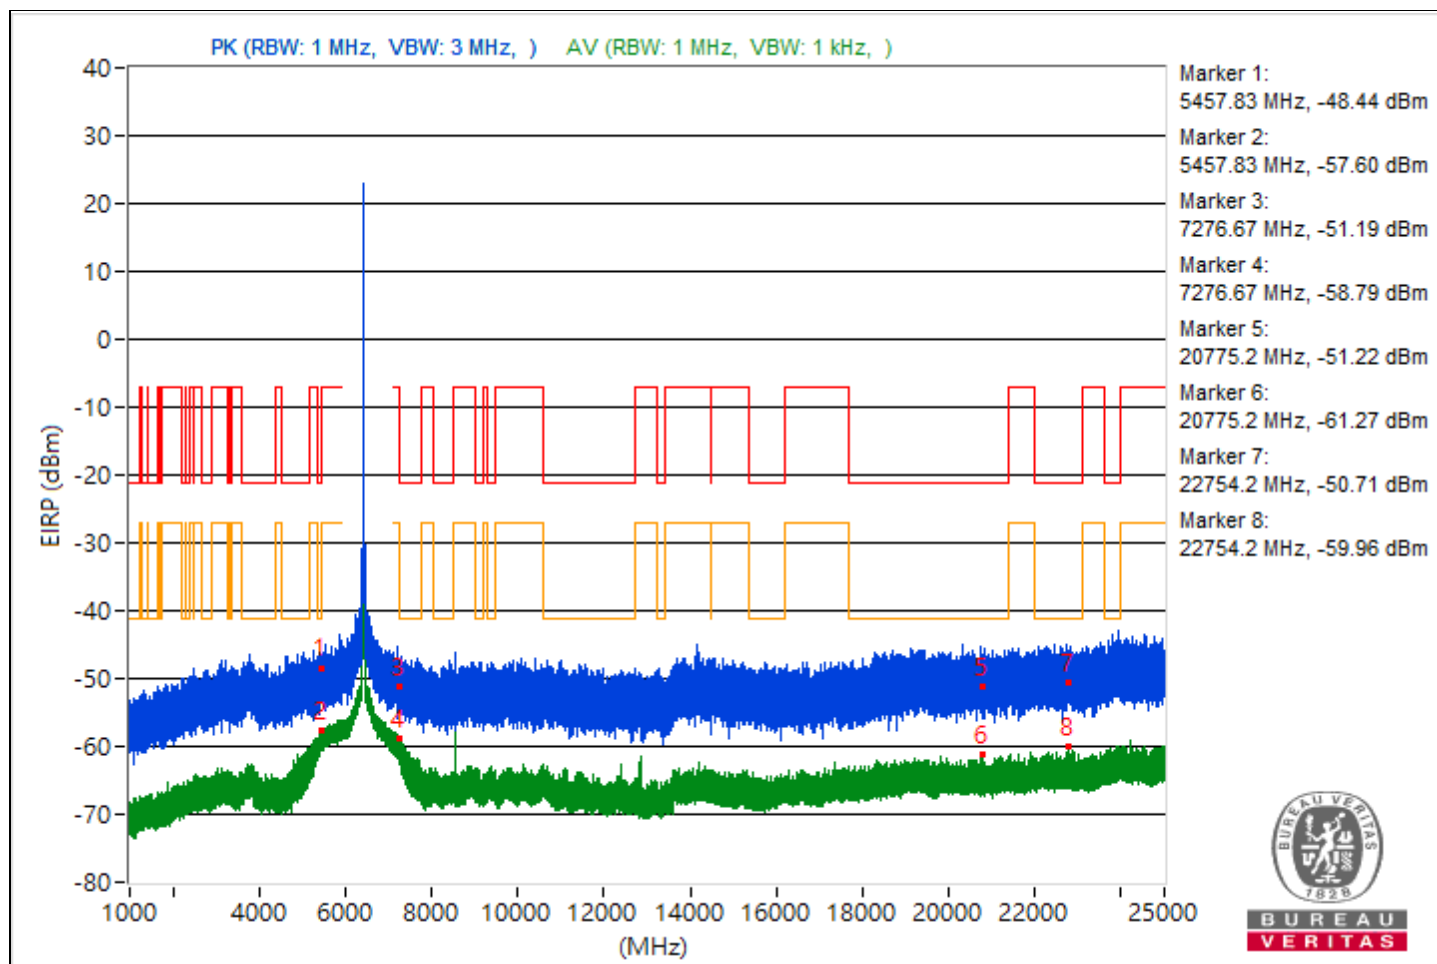


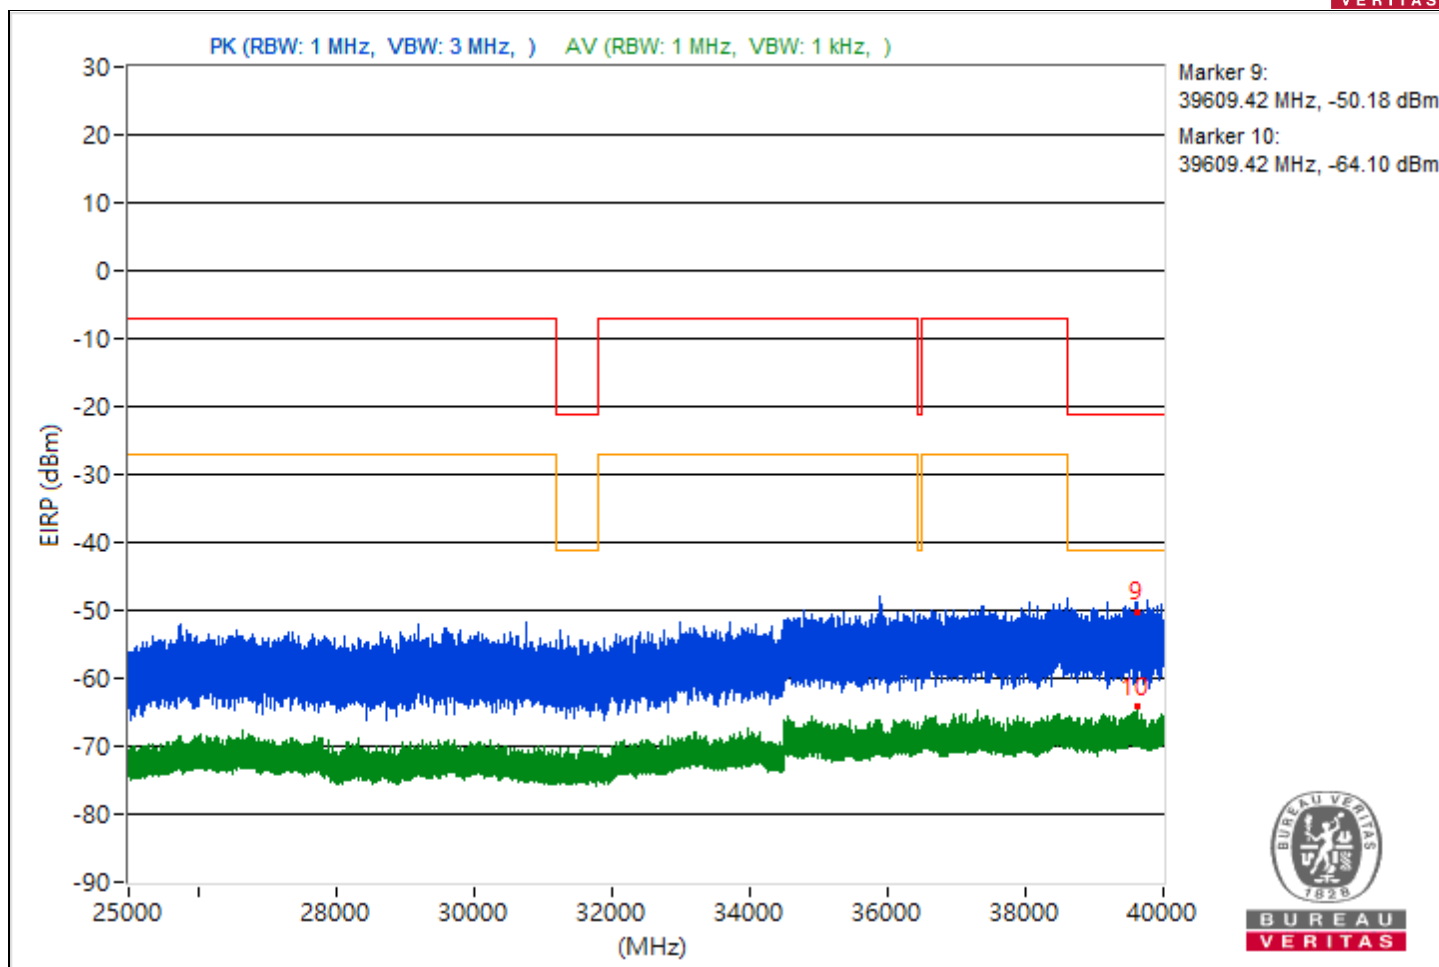

RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.12	44.25 PK	74	-29.75	-59.38	8.37	-51.01
2	5456.12	36.33 AV	54	-17.67	-67.3	8.37	-58.93
3	7262.12	45.38 PK	74	-28.62	-58.25	8.37	-49.88
4	7262.12	36.1 AV	54	-17.9	-67.53	8.37	-59.16
5	19152.4	43.68 PK	74	-30.32	-59.95	8.37	-51.58
6	19152.4	34.4 AV	54	-19.6	-69.23	8.37	-60.86
7	23936.8	46.34 PK	74	-27.66	-57.29	8.37	-48.92
8	23936.8	36.75 AV	54	-17.25	-66.88	8.37	-58.51
9	39084.18	38.72 PK	74	-35.28	-64.91	8.37	-56.54
10	39084.18	30.29 AV	54	-23.71	-73.34	8.37	-64.97

Note: Margin value = Emission Level - Limit value

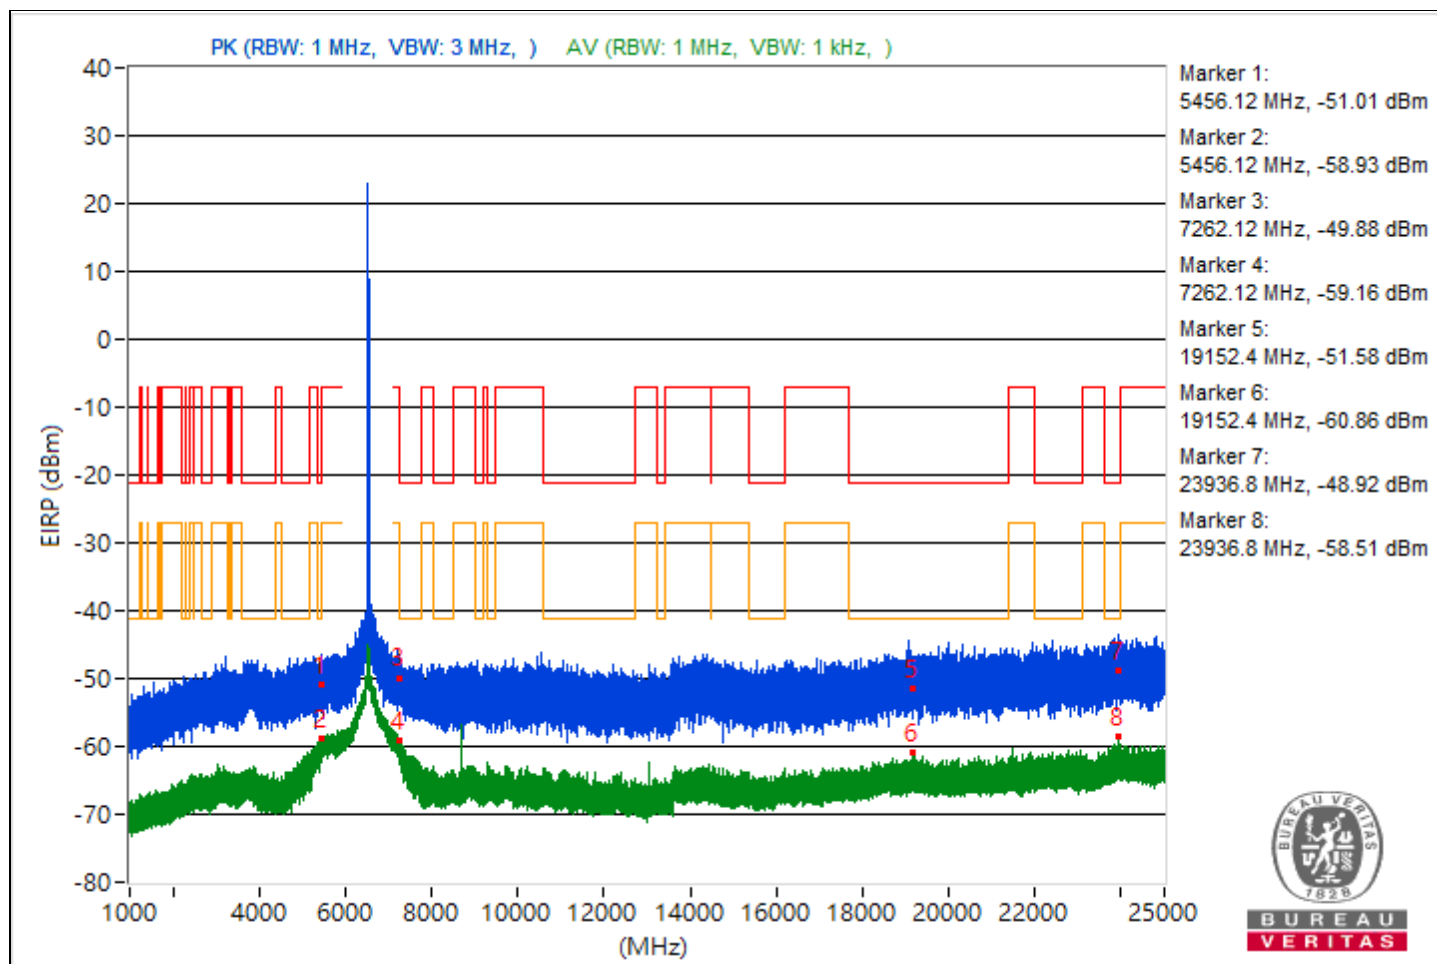





RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5438.54	43.41 PK	74	-30.59	-60.22	8.37	-51.85
2	5438.54	35.72 AV	54	-18.28	-67.91	8.37	-59.54
3	7258.78	45.73 PK	74	-28.27	-57.9	8.37	-49.53
4	7258.78	39.08 AV	54	-14.92	-64.55	8.37	-56.18
5	19391.6	46.77 PK	74	-27.23	-56.86	8.37	-48.49
6	19391.6	34.2 AV	54	-19.8	-69.43	8.37	-61.06
7	23972.4	48.8 PK	74	-25.2	-54.83	8.37	-46.46
8	23972.4	35.38 AV	54	-18.62	-68.25	8.37	-59.88
9	40000	37.71 PK	74	-36.29	-65.92	8.37	-57.55
10	40000	30.14 AV	54	-23.86	-73.49	8.37	-65.12

Note: Margin value = Emission Level - Limit value

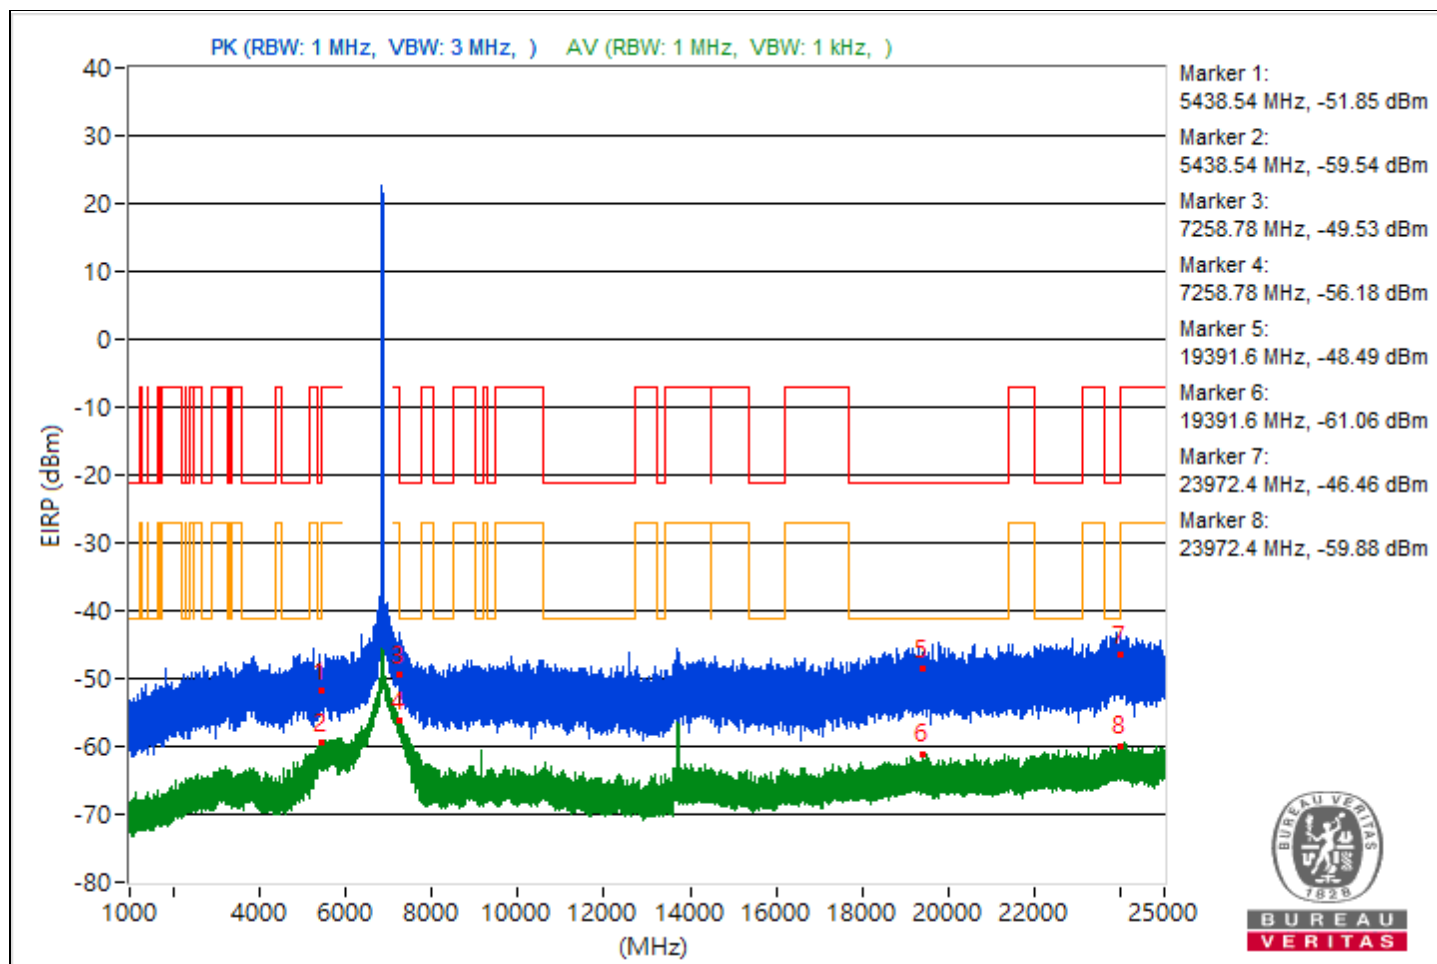

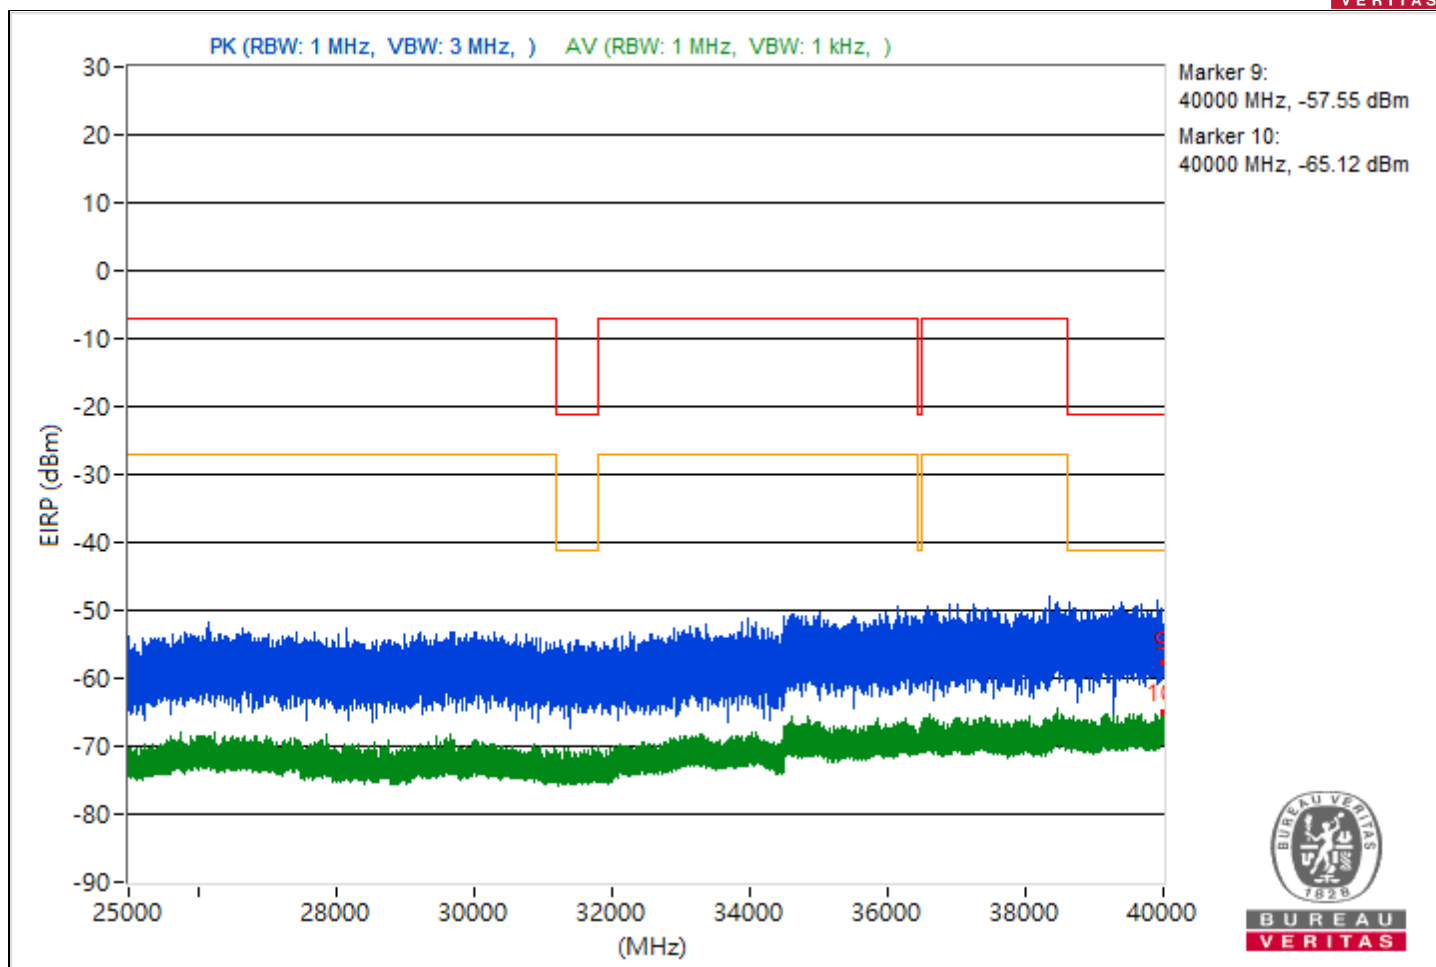



RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.74	45.97 PK	74	-28.03	-57.66	8.37	-49.29
2	5449.74	39.76 AV	54	-14.24	-63.87	8.37	-55.5
3	11903.2	50.44 PK	74	-23.56	-53.19	8.37	-44.82
4	11903.2	40.88 AV	54	-13.12	-62.75	8.37	-54.38
5	21348.9	45.31 PK	74	-28.69	-58.32	8.37	-49.95
6	21348.9	34.16 AV	54	-19.84	-69.47	8.37	-61.1
7	23983.1	49.25 PK	74	-24.75	-54.38	8.37	-46.01
8	23983.1	35.91 AV	54	-18.09	-67.72	8.37	-59.35
9	39687.38	37.63 PK	74	-36.37	-66	8.37	-57.63
10	39687.38	30.33 AV	54	-23.67	-73.3	8.37	-64.93

Note: Margin value = Emission Level - Limit value

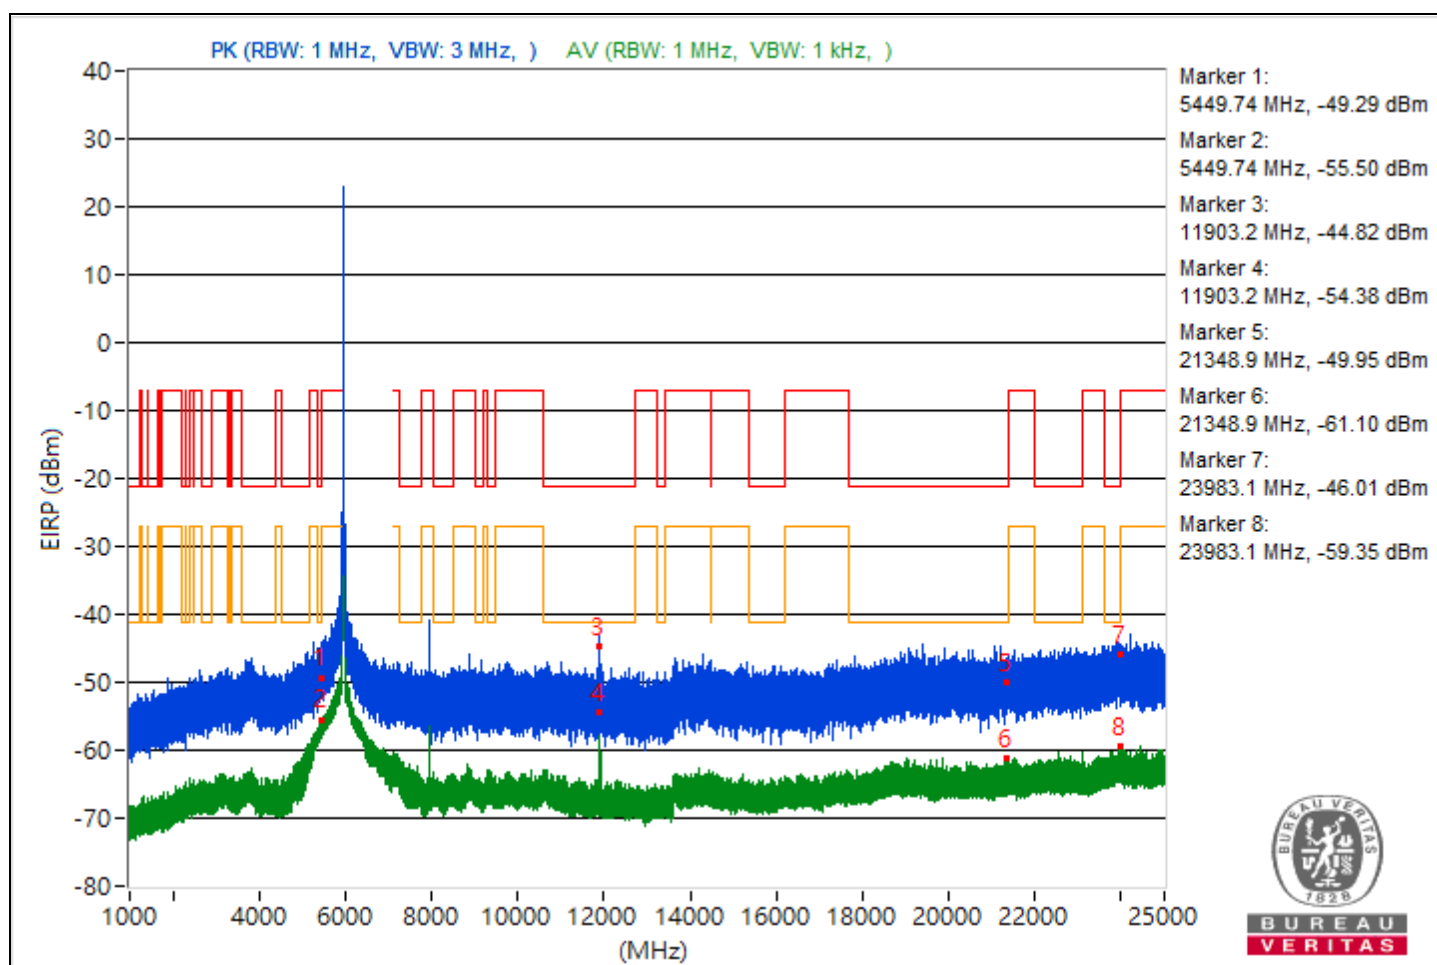


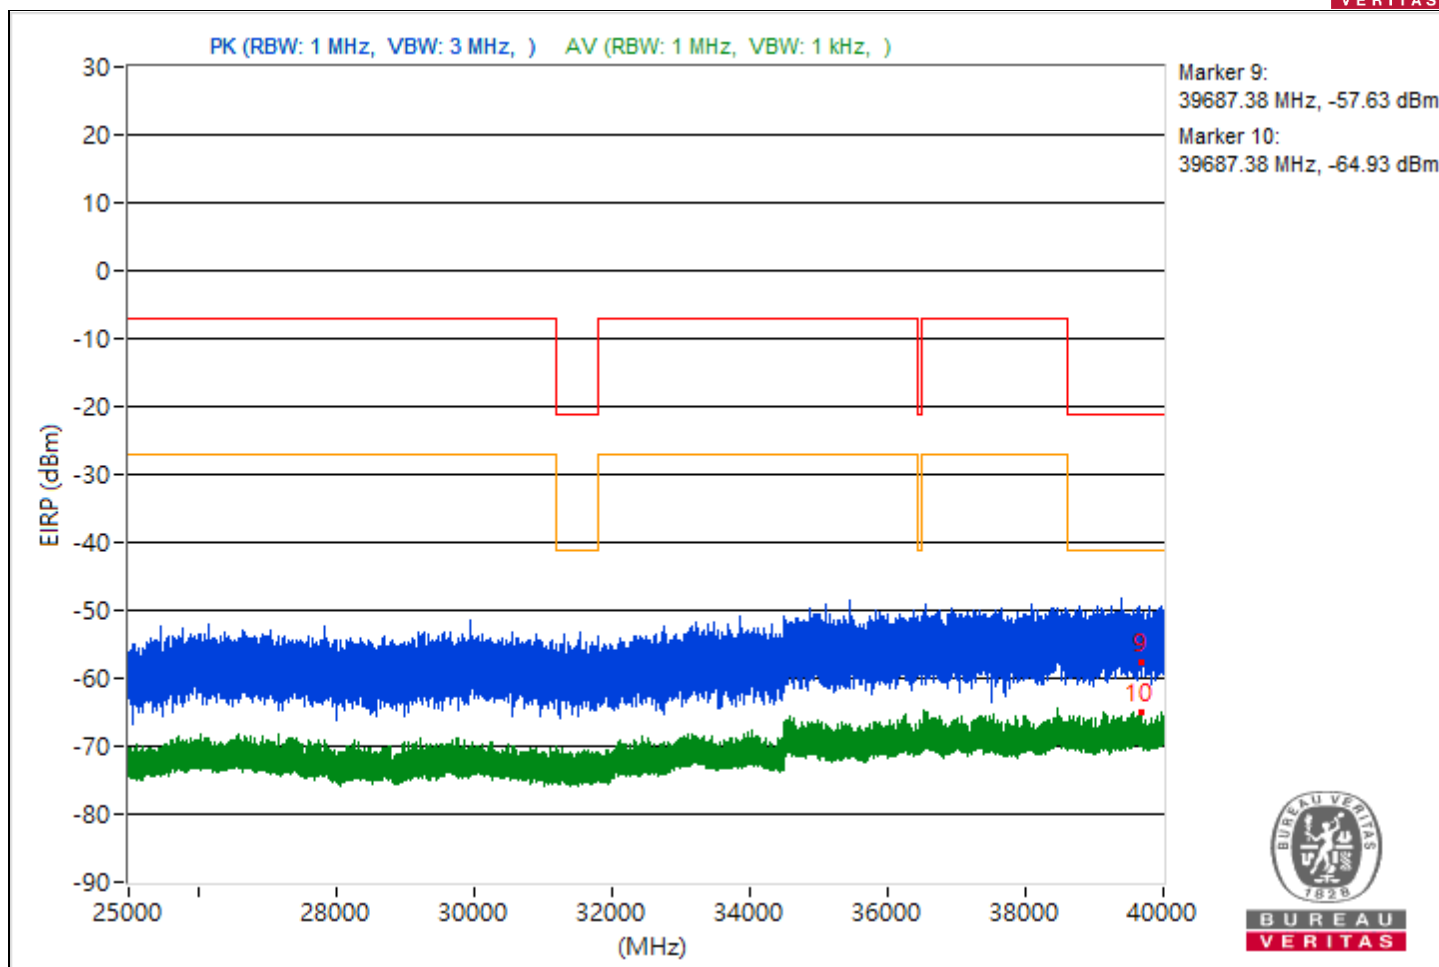


RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.41	43.73 PK	74	-30.27	-59.9	8.37	-51.53
2	5454.41	37.44 AV	54	-16.56	-66.19	8.37	-57.82
3	7251.31	46.55 PK	74	-27.45	-57.08	8.37	-48.71
4	7251.31	36.23 AV	54	-17.77	-67.4	8.37	-59.03
5	19220.6	47.05 PK	74	-26.95	-56.58	8.37	-48.21
6	19220.6	34.61 AV	54	-19.39	-69.02	8.37	-60.65
7	23944.3	46.95 PK	74	-27.05	-56.68	8.37	-48.31
8	23944.3	35.26 AV	54	-18.74	-68.37	8.37	-60
9	39655.82	38.15 PK	74	-35.85	-65.48	8.37	-57.11
10	39655.82	31.03 AV	54	-22.97	-72.6	8.37	-64.23

Note: Margin value = Emission Level - Limit value

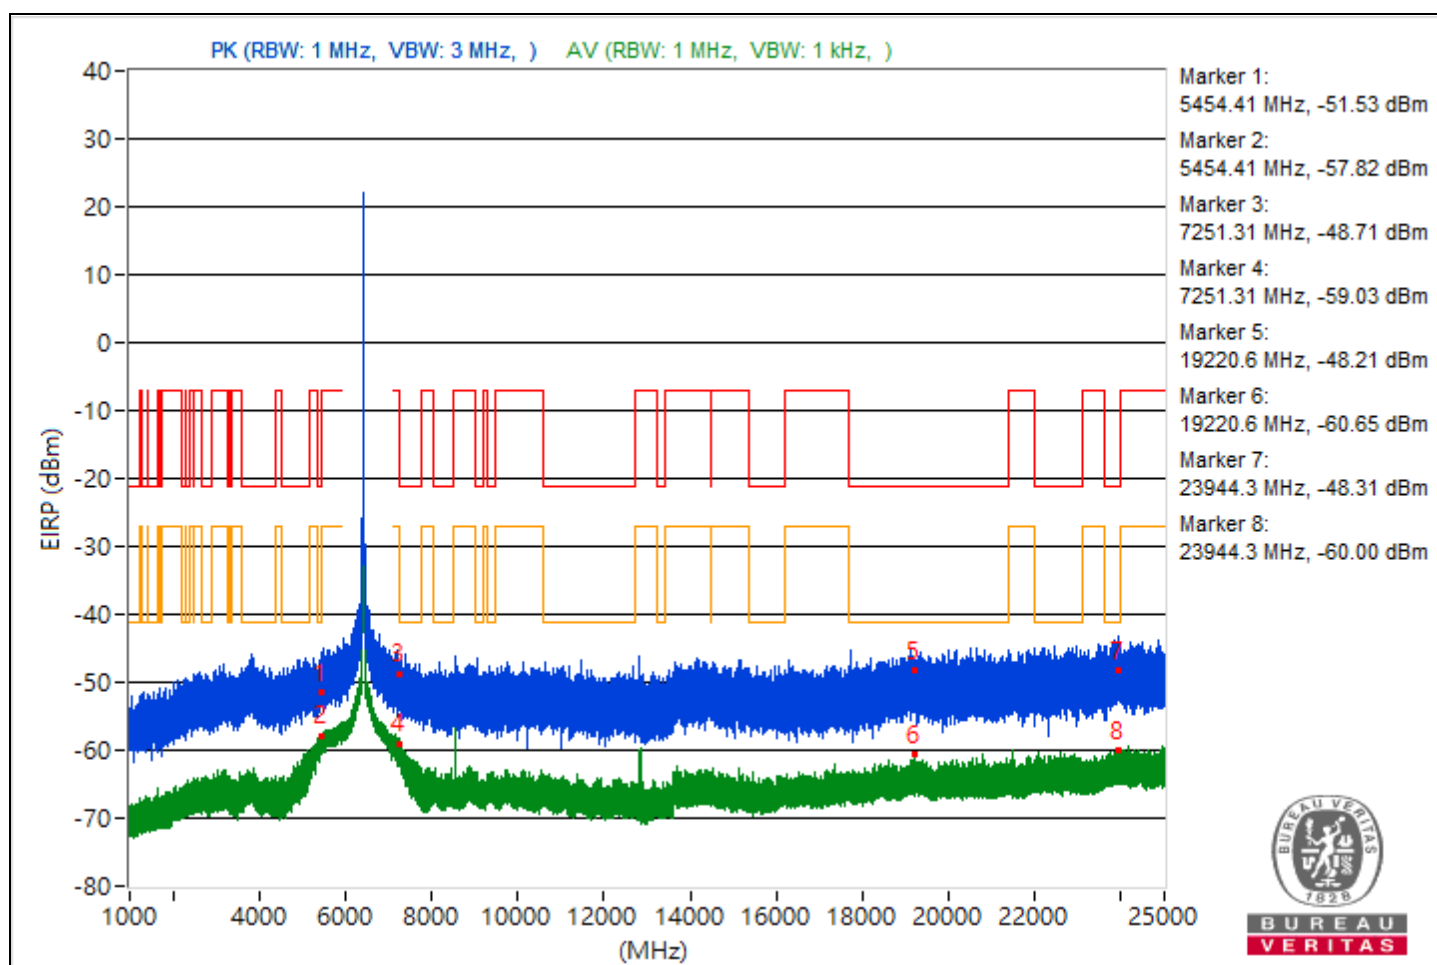

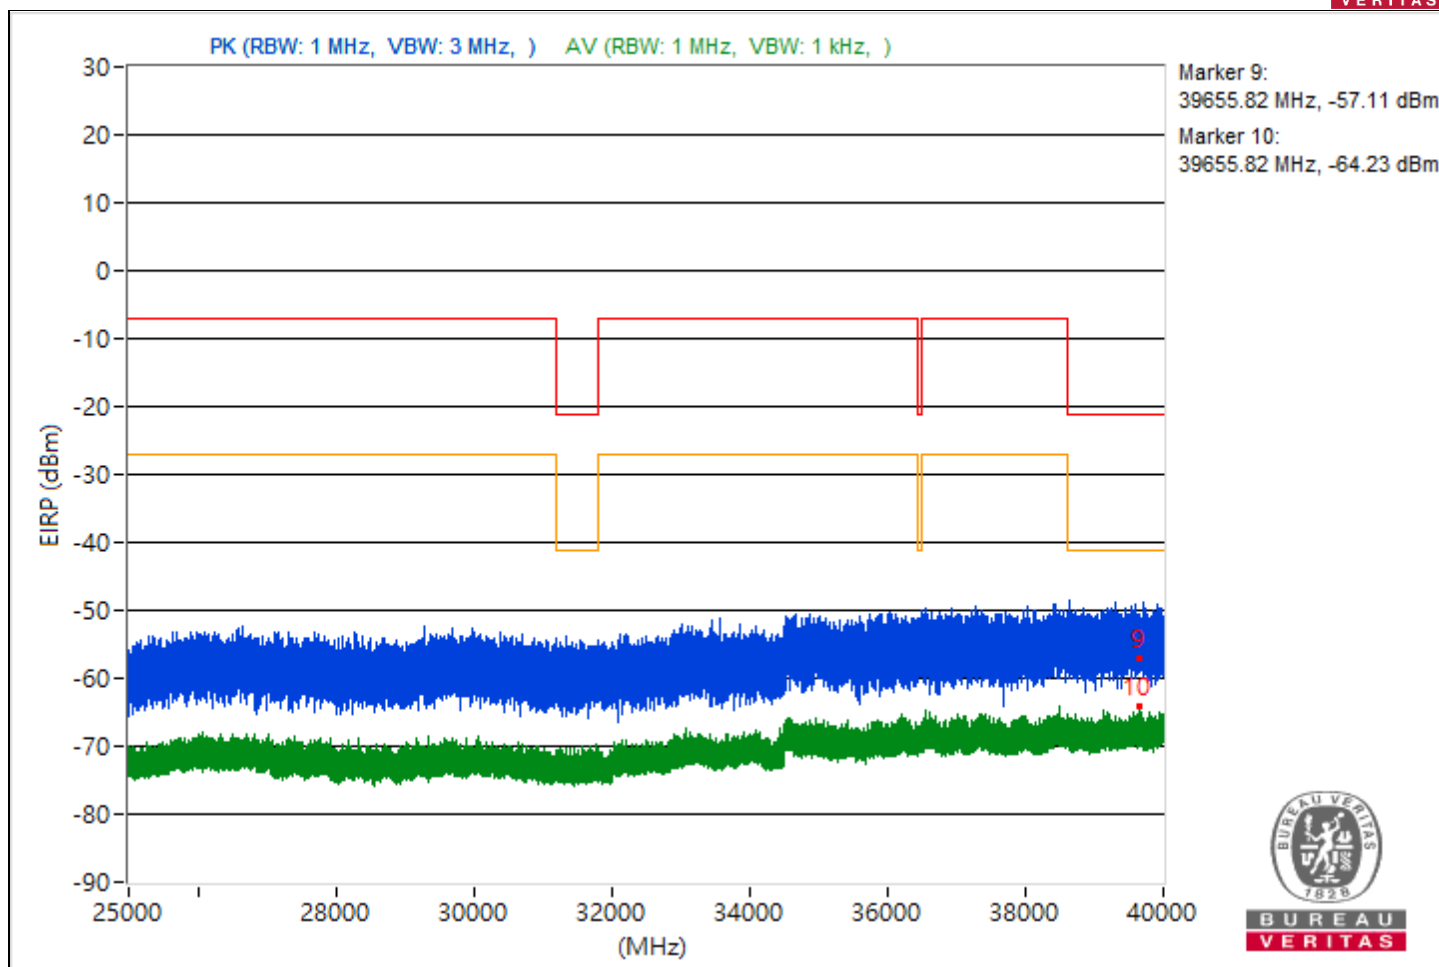



RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5445.39	44.91 PK	74	-29.09	-58.72	8.37	-50.35
2	5445.39	36.55 AV	54	-17.45	-67.08	8.37	-58.71
3	7260.18	44.78 PK	74	-29.22	-58.85	8.37	-50.48
4	7260.18	36.32 AV	54	-17.68	-67.31	8.37	-58.94
5	19836.1	45.58 PK	74	-28.42	-58.05	8.37	-49.68
6	19836.1	34.61 AV	54	-19.39	-69.02	8.37	-60.65
7	23960.8	44.96 PK	74	-29.04	-58.67	8.37	-50.3
8	23960.8	36.24 AV	54	-17.76	-67.39	8.37	-59.02
9	39619.82	40.7 PK	74	-33.3	-62.93	8.37	-54.56
10	39619.82	31.23 AV	54	-22.77	-72.4	8.37	-64.03

Note: Margin value = Emission Level - Limit value

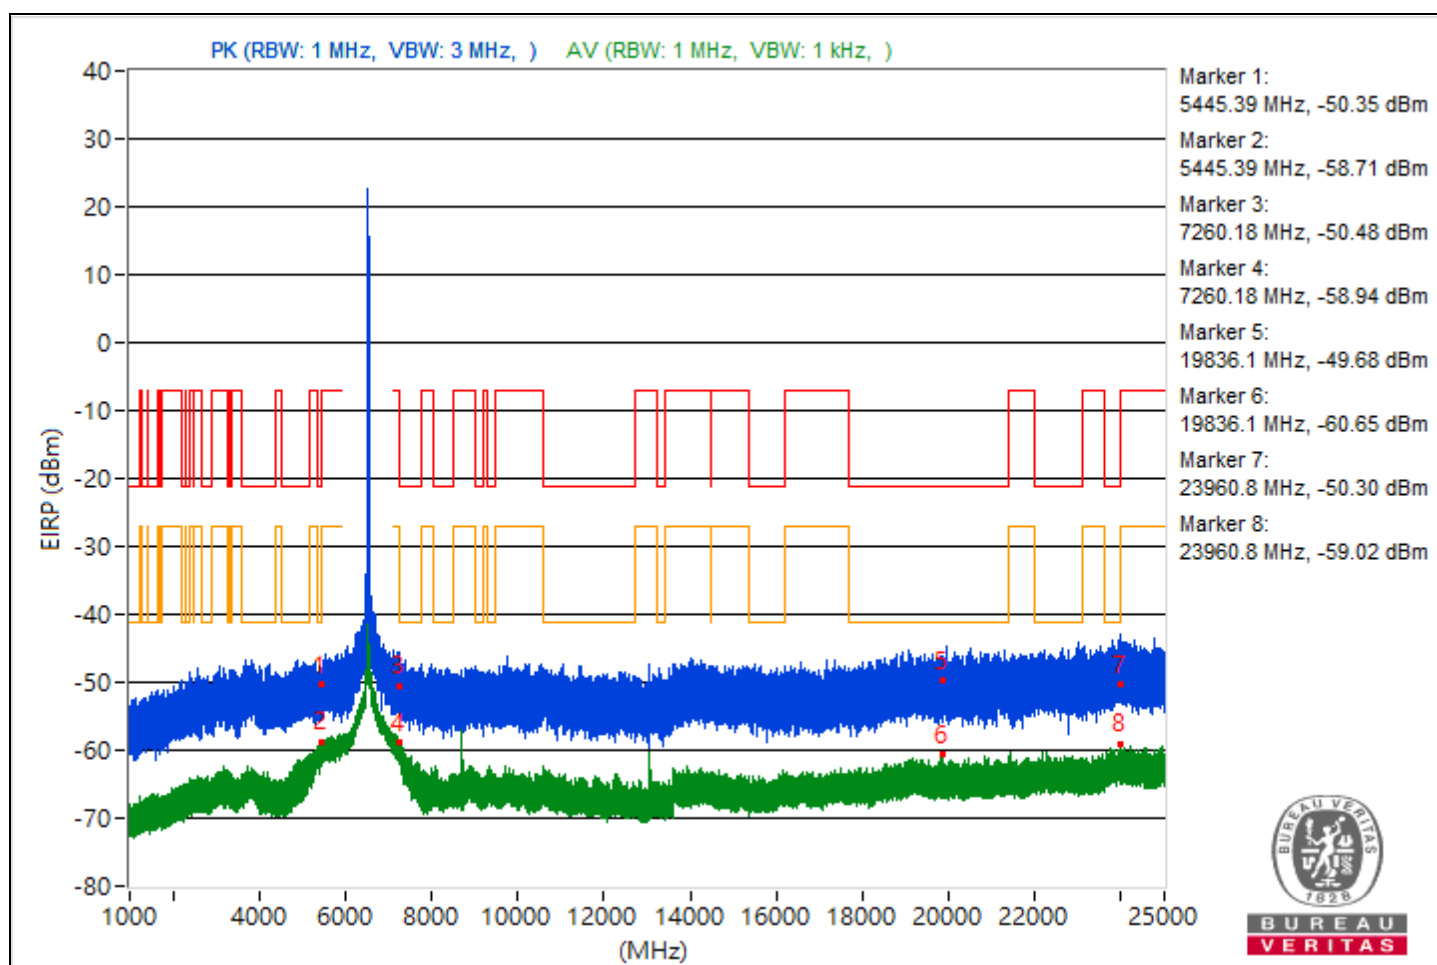

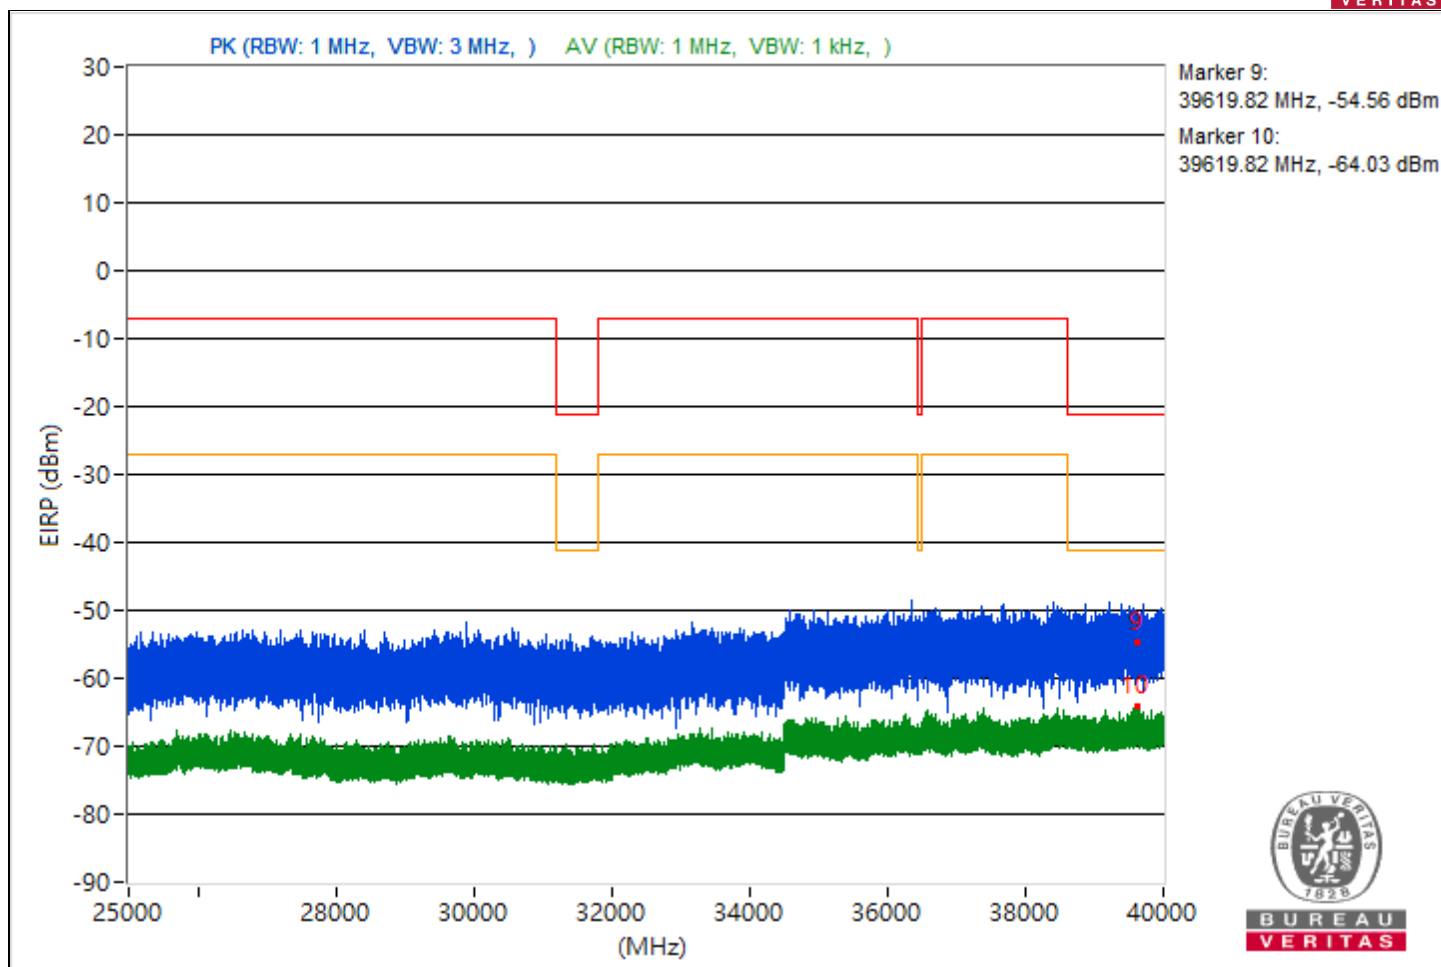



RF Mode	802.11be (EHT20) 106+26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.98	45.51 PK	74	-28.49	-58.12	8.37	-49.75
2	5449.98	35.46 AV	54	-18.54	-68.17	8.37	-59.8
3	7261.5	47.06 PK	74	-26.94	-56.57	8.37	-48.2
4	7261.5	39.27 AV	54	-14.73	-64.36	8.37	-55.99
5	20624.9	45.48 PK	74	-28.52	-58.15	8.37	-49.78
6	20624.9	34.05 AV	54	-19.95	-69.58	8.37	-61.21
7	23997.6	47.1 PK	74	-26.9	-56.53	8.37	-48.16
8	23997.6	35.56 AV	54	-18.44	-68.07	8.37	-59.7
9	39953.87	45.26 PK	74	-28.74	-58.37	8.37	-50
10	39953.87	30.9 AV	54	-23.1	-72.73	8.37	-64.36

Note: Margin value = Emission Level - Limit value

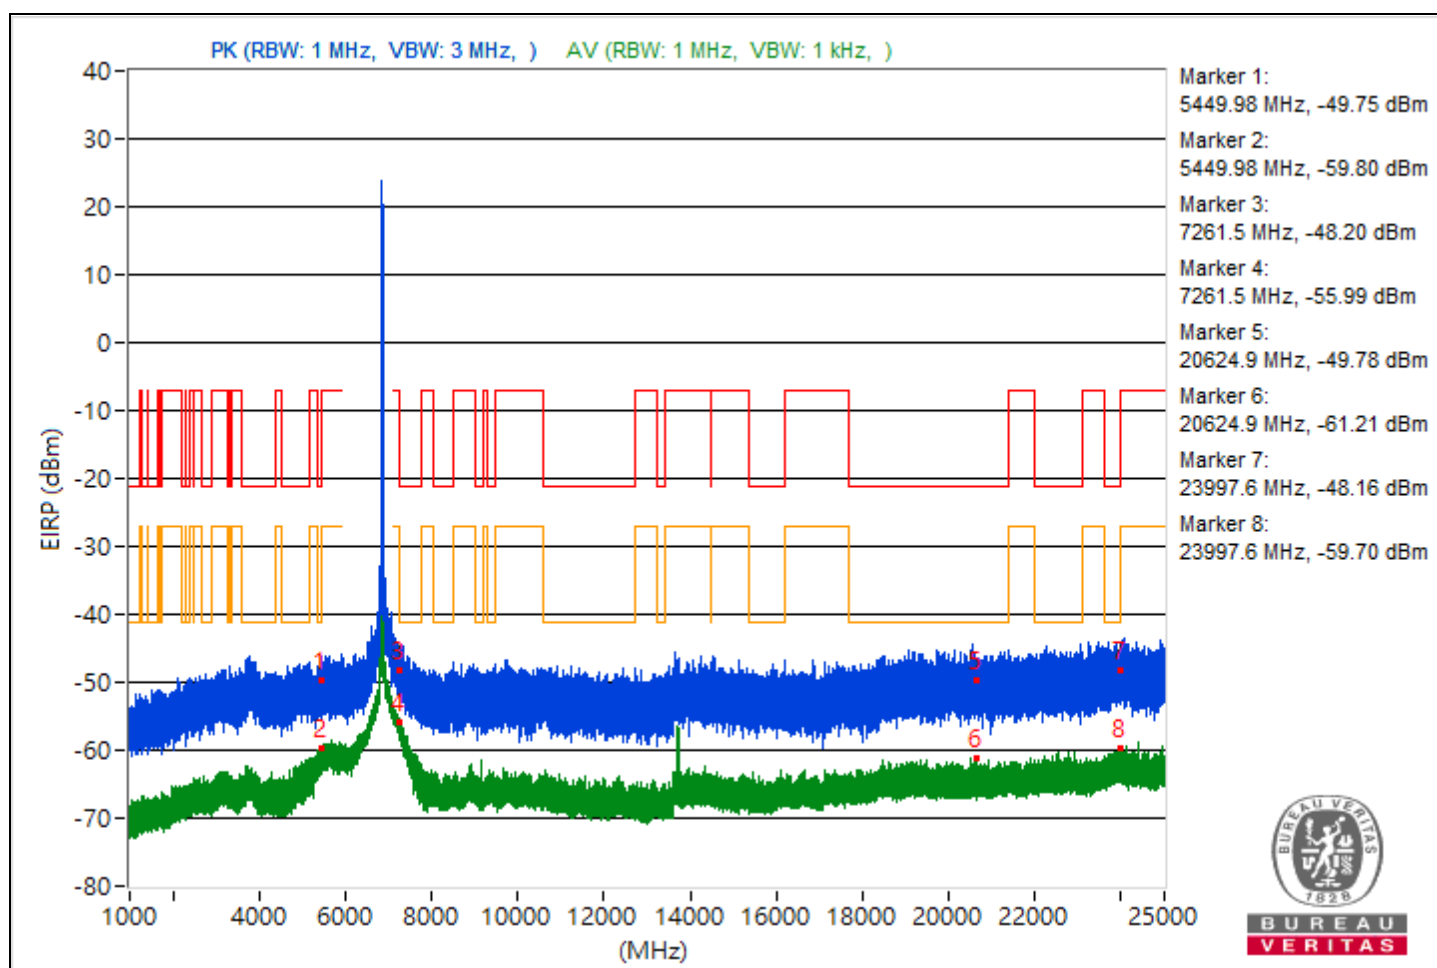

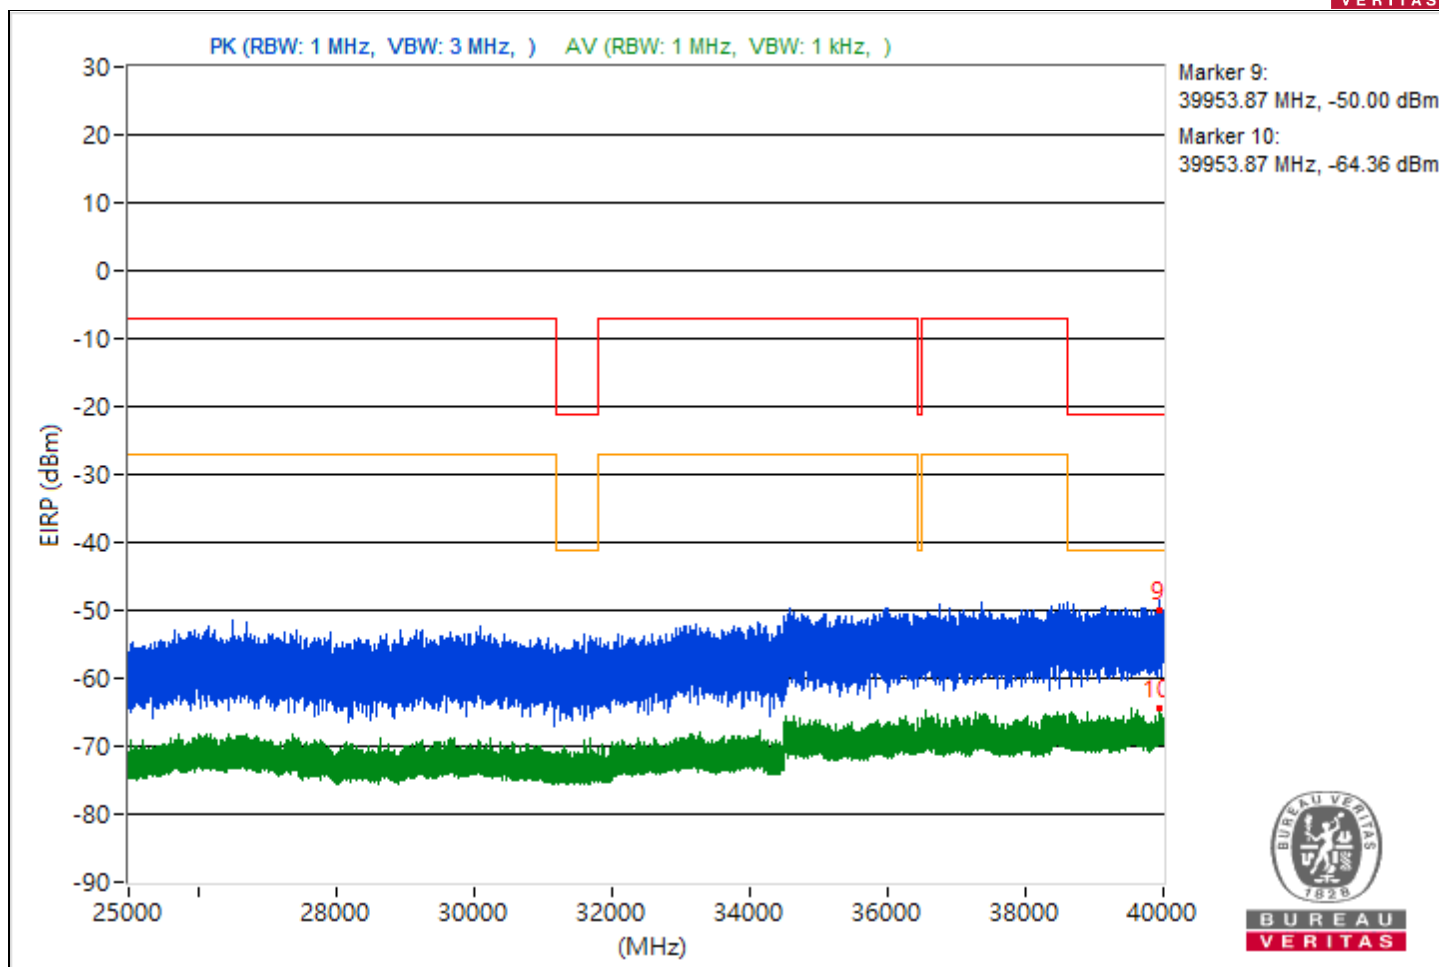



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5445.47	48.16 PK	74	-25.84	-55.47	8.37	-47.1
2	5445.47	39.67 AV	54	-14.33	-63.96	8.37	-55.59
3	11953.69	46.35 PK	74	-27.65	-57.28	8.37	-48.91
4	11953.69	39.28 AV	54	-14.72	-64.35	8.37	-55.98
5	19455.6	44.07 PK	74	-29.93	-59.56	8.37	-51.19
6	19455.6	34.55 AV	54	-19.45	-69.08	8.37	-60.71
7	23886.2	48.1 PK	74	-25.9	-55.53	8.37	-47.16
8	23886.2	35.4 AV	54	-18.6	-68.23	8.37	-59.86
9	39994.22	41.99 PK	74	-32.01	-61.64	8.37	-53.27
10	39994.22	30.81 AV	54	-23.19	-72.82	8.37	-64.45

Note: Margin value = Emission Level - Limit value

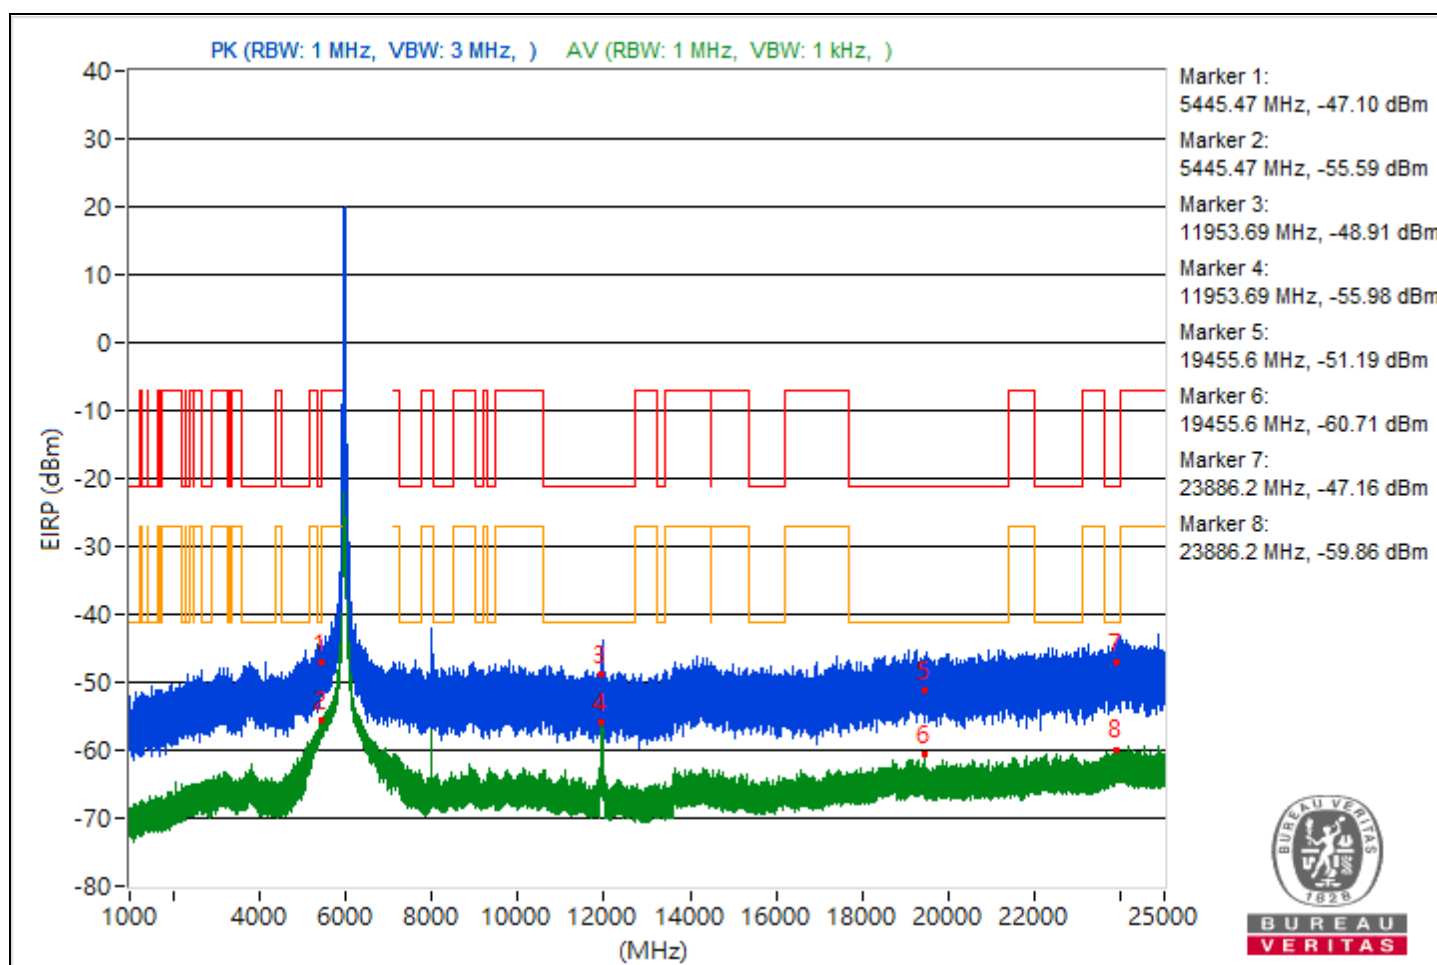

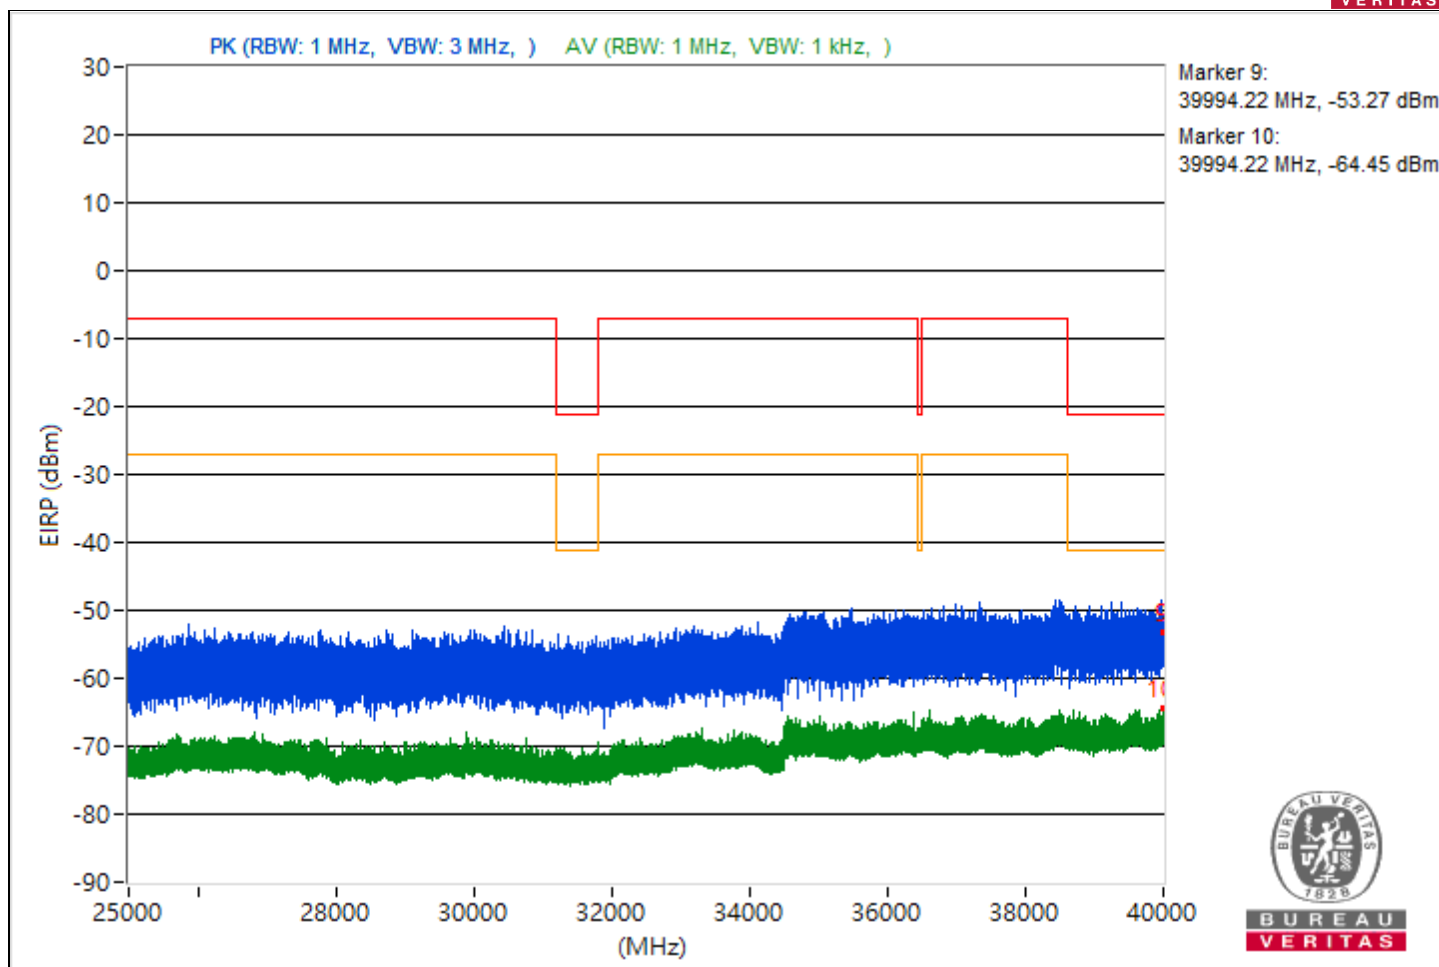



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.64	45.97 PK	74	-28.03	-57.66	8.37	-49.29
2	5454.64	38.15 AV	54	-15.85	-65.48	8.37	-57.11
3	7266.94	43.56 PK	74	-30.44	-60.07	8.37	-51.7
4	7266.94	36.08 AV	54	-17.92	-67.55	8.37	-59.18
5	19197.5	43.31 PK	74	-30.69	-60.32	8.37	-51.95
6	19197.5	34.38 AV	54	-19.62	-69.25	8.37	-60.88
7	23844	48.08 PK	74	-25.92	-55.55	8.37	-47.18
8	23844	35.42 AV	54	-18.58	-68.21	8.37	-59.84
9	39433.78	40.25 PK	74	-33.75	-63.38	8.37	-55.01
10	39433.78	30.45 AV	54	-23.55	-73.18	8.37	-64.81

Note: Margin value = Emission Level - Limit value

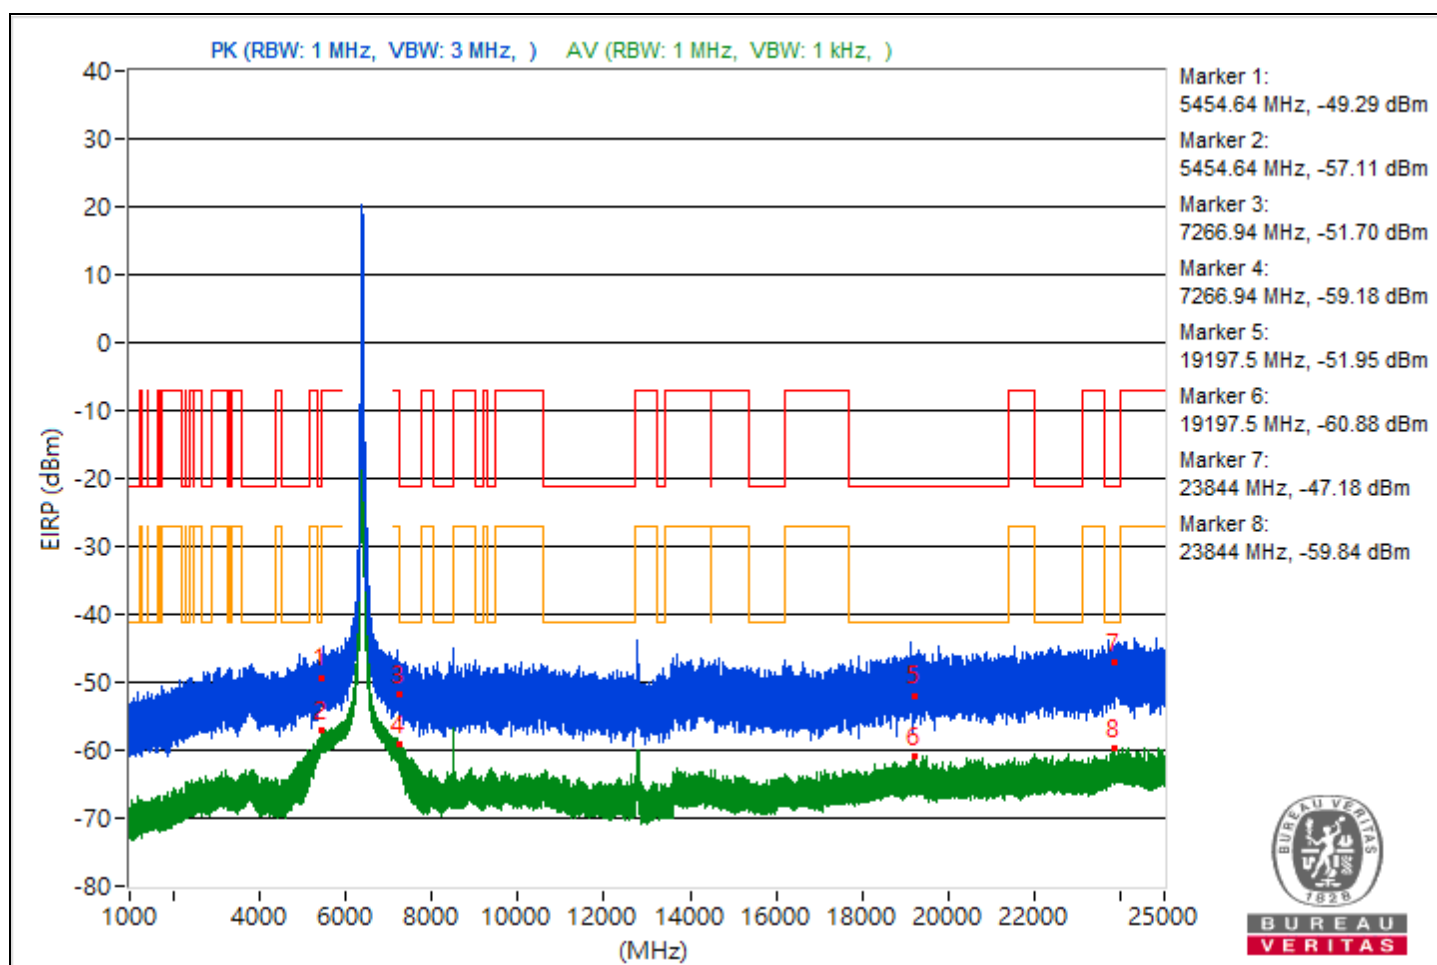

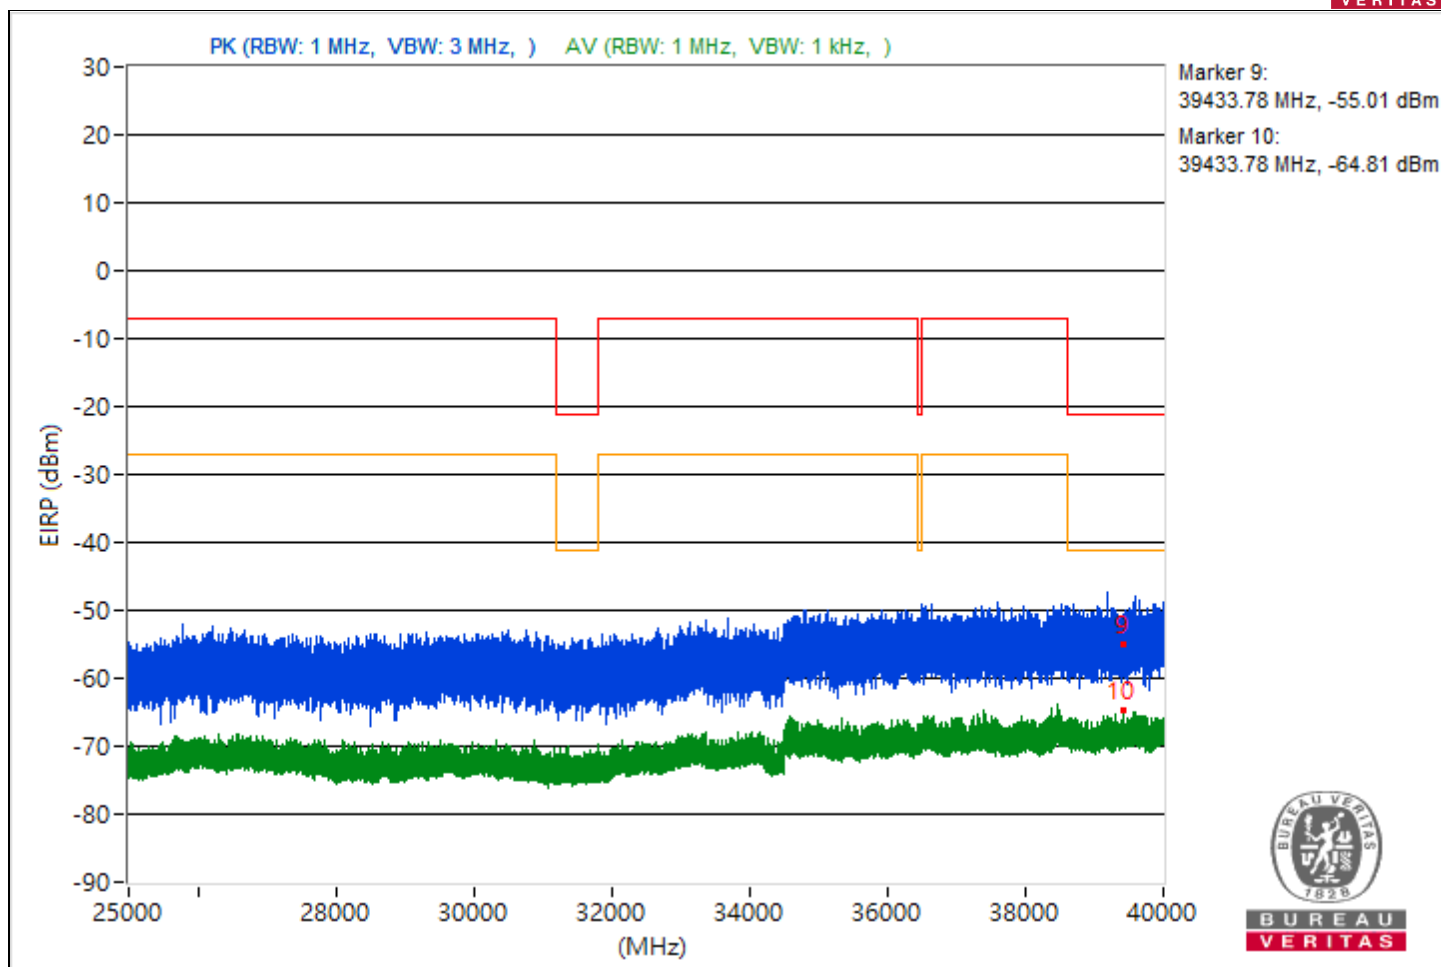



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.18	47.08 PK	74	-26.92	-56.55	8.37	-48.18
2	5454.18	36.38 AV	54	-17.62	-67.25	8.37	-58.88
3	7263.44	46.47 PK	74	-27.53	-57.16	8.37	-48.79
4	7263.44	36.98 AV	54	-17.02	-66.65	8.37	-58.28
5	20599.8	45.11 PK	74	-28.89	-58.52	8.37	-50.15
6	20599.8	34.46 AV	54	-19.54	-69.17	8.37	-60.8
7	23927.5	47.26 PK	74	-26.74	-56.37	8.37	-48
8	23927.5	35.71 AV	54	-18.29	-67.92	8.37	-59.55
9	39996.36	41.04 PK	74	-32.96	-62.59	8.37	-54.22
10	39996.36	30.94 AV	54	-23.06	-72.69	8.37	-64.32

Note: Margin value = Emission Level - Limit value

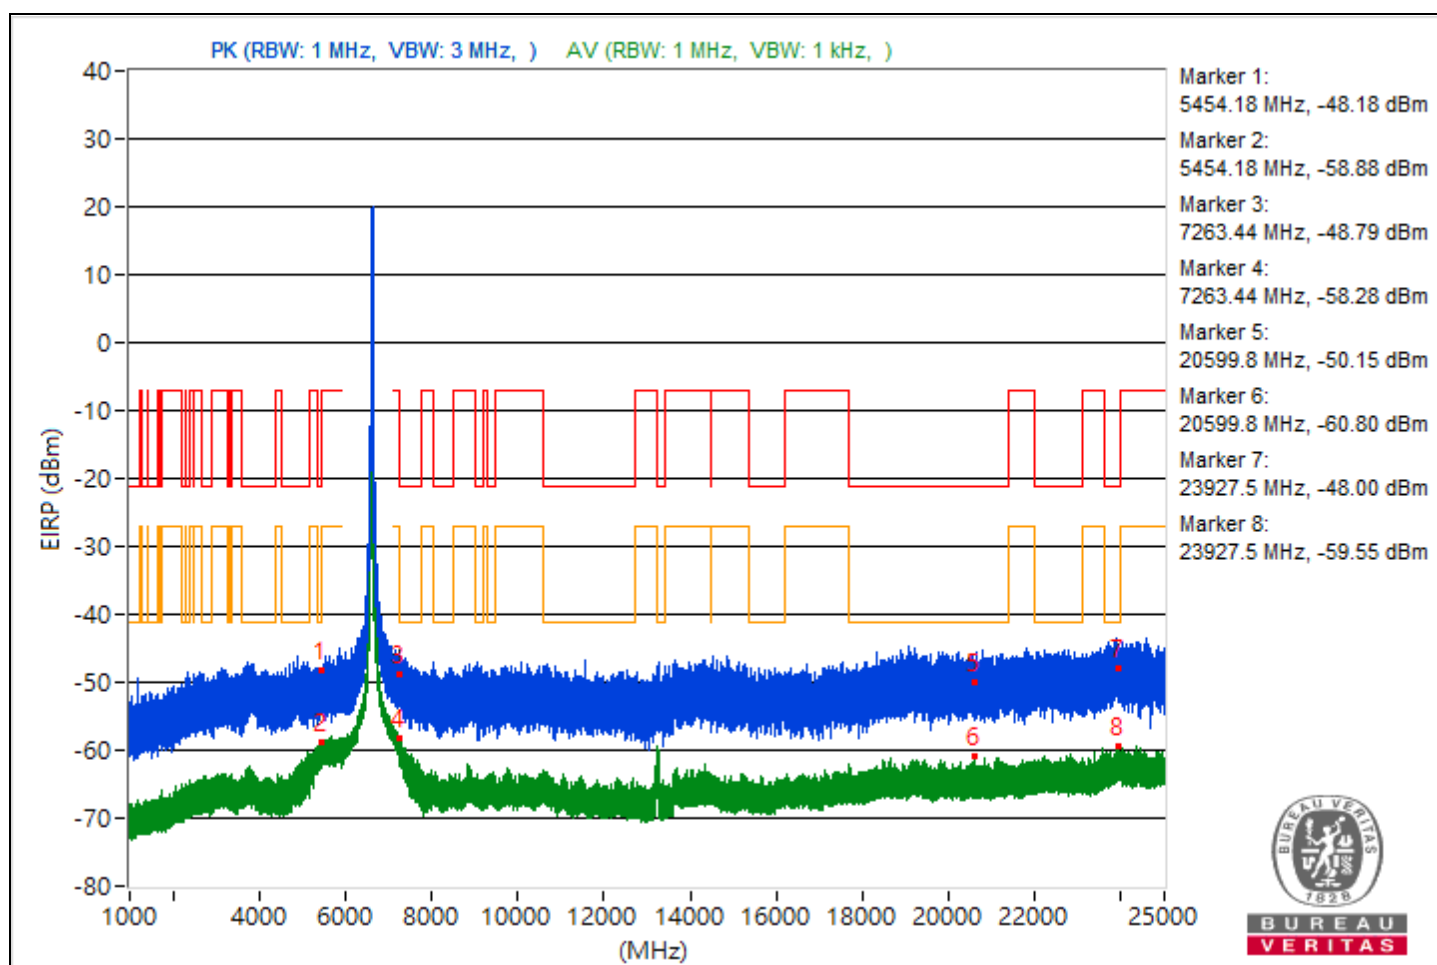

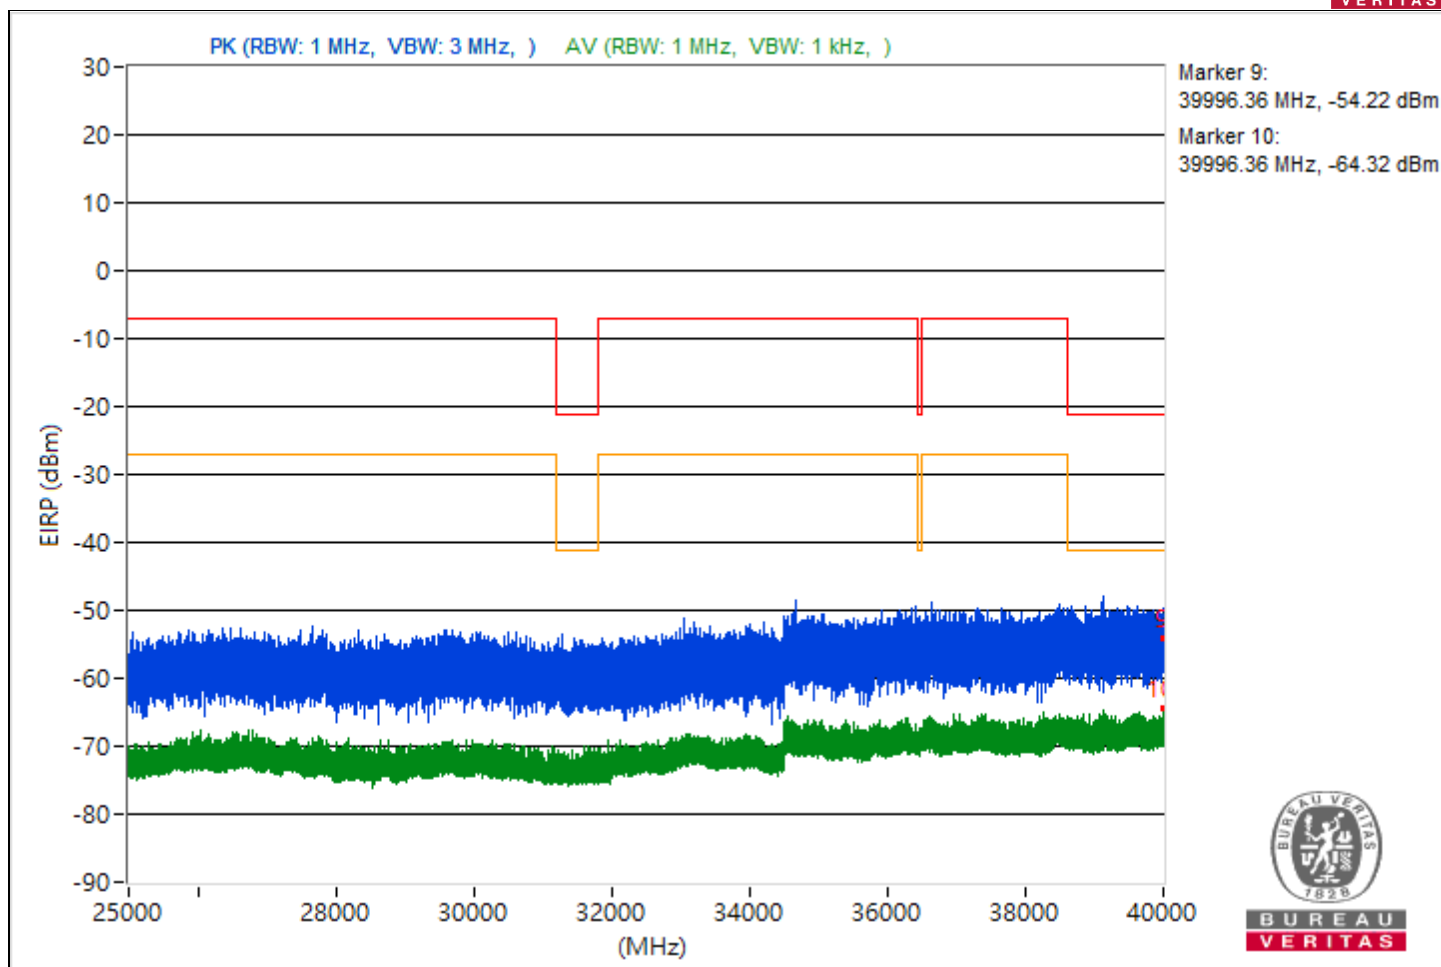



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5415.83	44.07 PK	74	-29.93	-59.56	8.37	-51.19
2	5415.83	35.58 AV	54	-18.42	-68.05	8.37	-59.68
3	7258.78	46.3 PK	74	-27.7	-57.33	8.37	-48.96
4	7258.78	38.67 AV	54	-15.33	-64.96	8.37	-56.59
5	20377	45.9 PK	74	-28.1	-57.73	8.37	-49.36
6	20377	34.23 AV	54	-19.77	-69.4	8.37	-61.03
7	23904.3	47.45 PK	74	-26.55	-56.18	8.37	-47.81
8	23904.3	35.15 AV	54	-18.85	-68.48	8.37	-60.11
9	39992.62	42.29 PK	74	-31.71	-61.34	8.37	-52.97
10	39992.62	31.46 AV	54	-22.54	-72.17	8.37	-63.8

Note: Margin value = Emission Level - Limit value

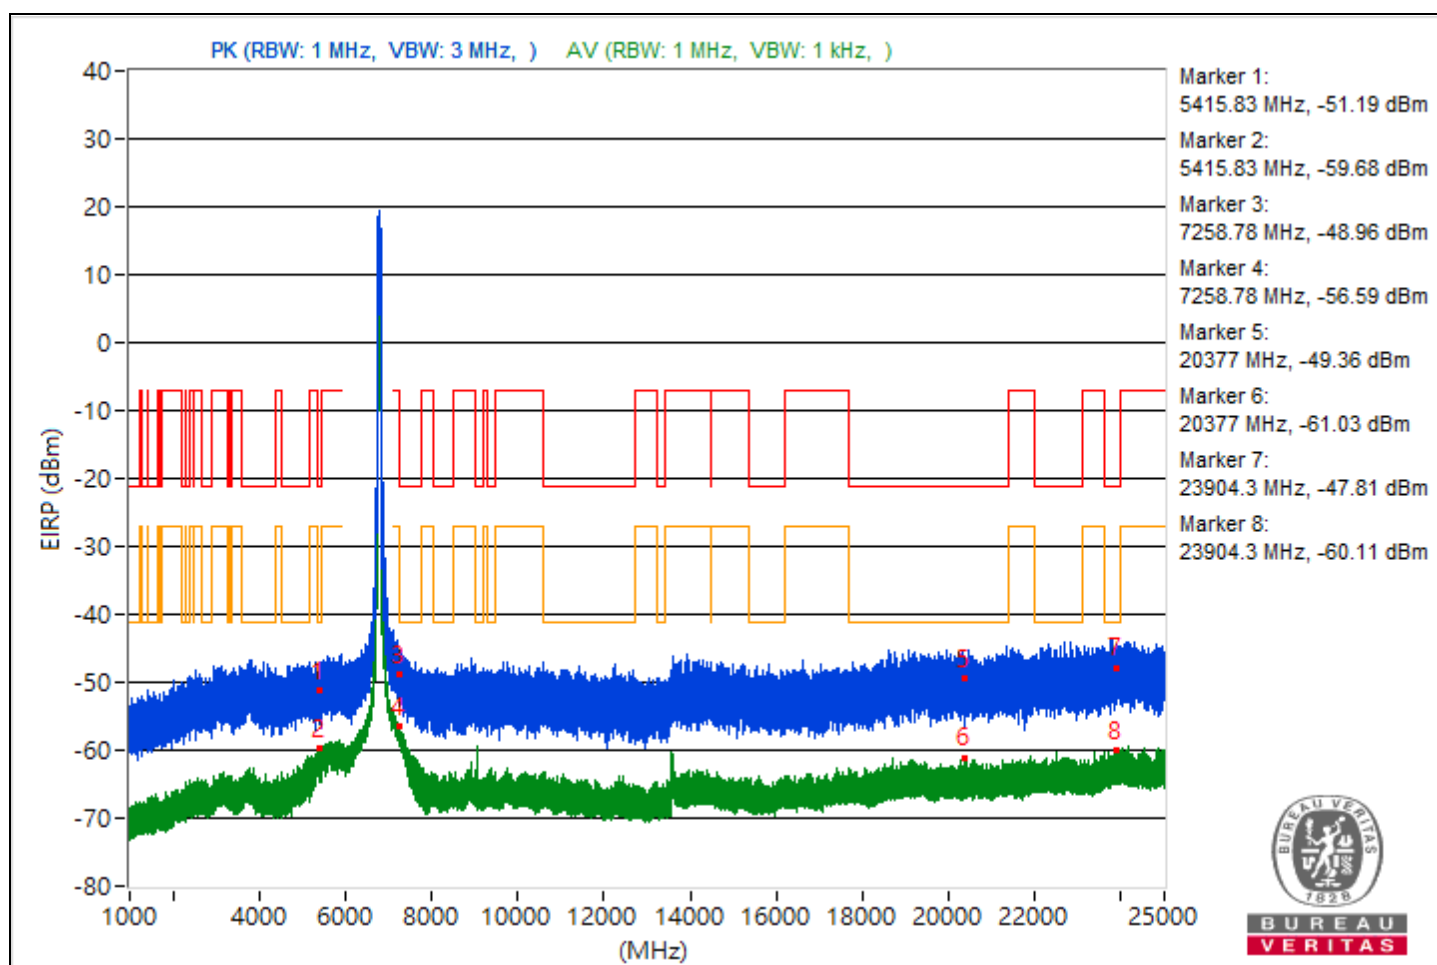


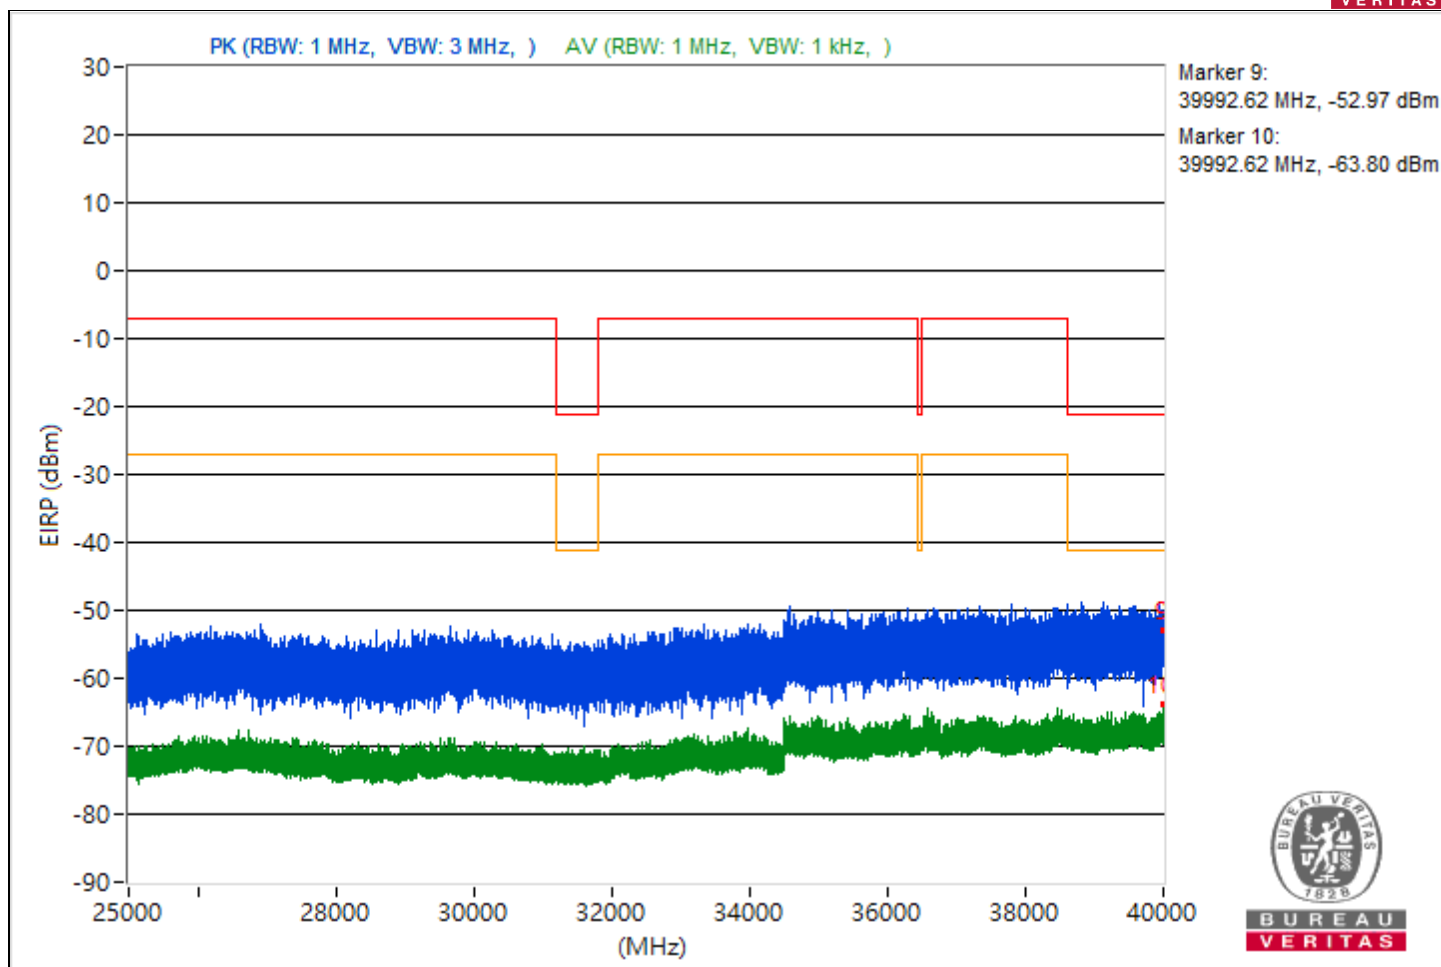


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.41	47.26 PK	74	-26.74	-56.37	8.37	-48
2	5454.41	39.62 AV	54	-14.38	-64.01	8.37	-55.64
3	8033.33	52.82 PK	74	-21.18	-50.81	8.37	-42.44
4	8033.33	51.08 AV	54	-2.92	-52.55	8.37	-44.18
5	21243.3	44.78 PK	74	-29.22	-58.85	8.37	-50.48
6	21243.3	34.3 AV	54	-19.7	-69.33	8.37	-60.96
7	23981.5	44.07 PK	74	-29.93	-59.56	8.37	-51.19
8	23981.5	35.71 AV	54	-18.29	-67.92	8.37	-59.55
9	39138.13	38.74 PK	74	-35.26	-64.89	8.37	-56.52
10	39138.13	30.98 AV	54	-23.02	-72.65	8.37	-64.28

Note: Margin value = Emission Level - Limit value

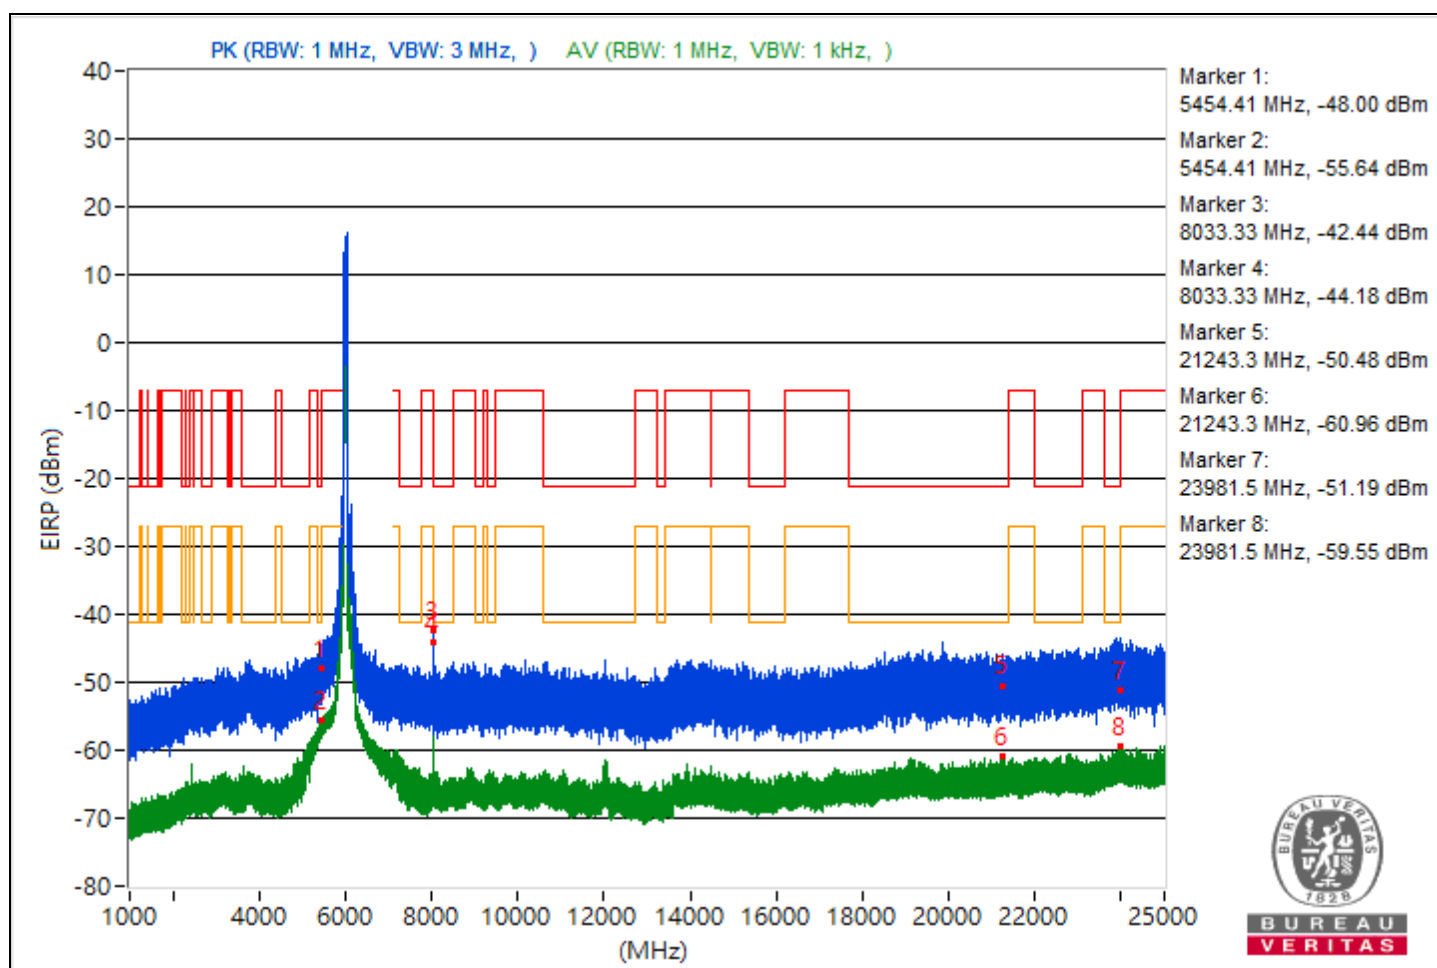


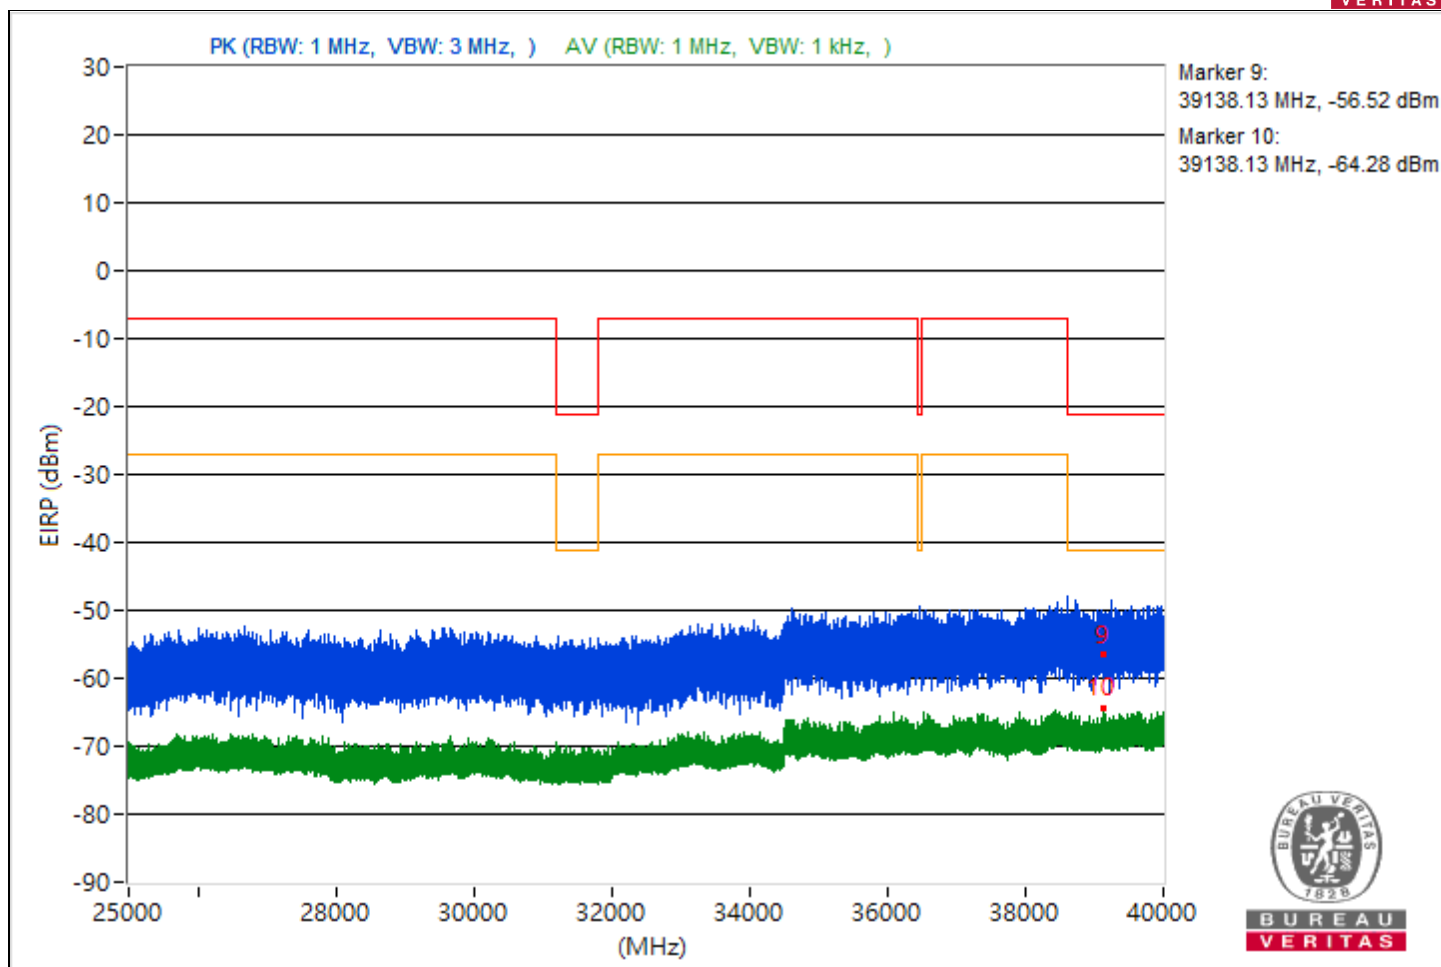


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.54	44.71 PK	74	-29.29	-58.92	8.37	-50.55
2	5459.54	37.92 AV	54	-16.08	-65.71	8.37	-57.34
3	8460	47.42 PK	74	-26.58	-56.21	8.37	-47.84
4	8460	45.06 AV	54	-8.94	-58.57	8.37	-50.2
5	19128.1	45.31 PK	74	-28.69	-58.32	8.37	-49.95
6	19128.1	33.99 AV	54	-20.01	-69.64	8.37	-61.27
7	23932.8	51.98 PK	74	-22.02	-51.65	8.37	-43.28
8	23932.8	35.63 AV	54	-18.37	-68	8.37	-59.63
9	39387.02	40.61 PK	74	-33.39	-63.02	8.37	-54.65
10	39387.02	30.4 AV	54	-23.6	-73.23	8.37	-64.86

Note: Margin value = Emission Level - Limit value

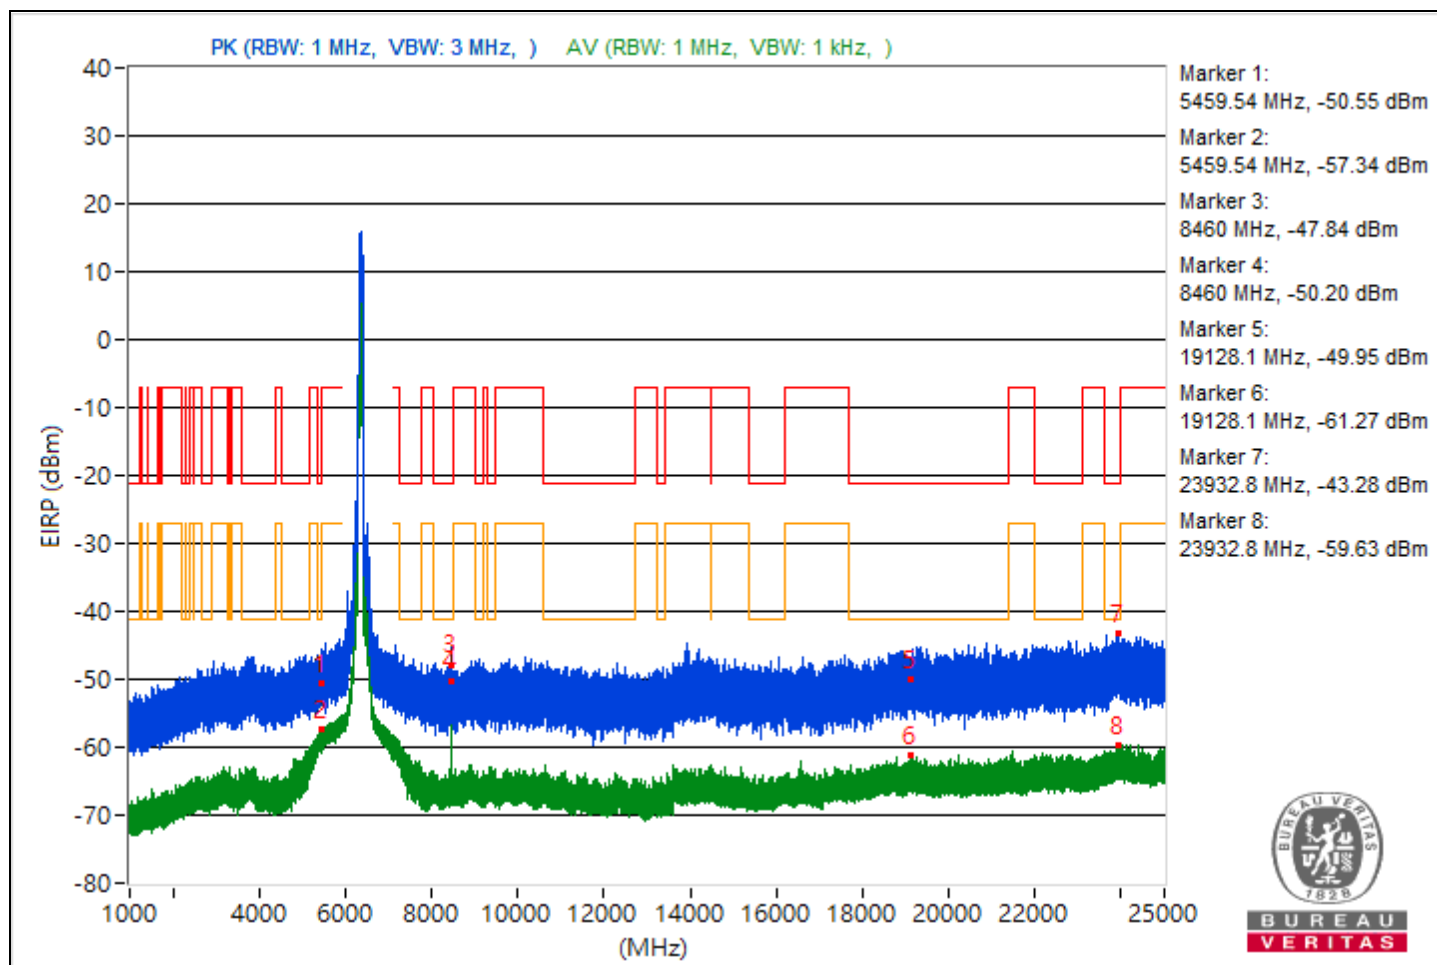


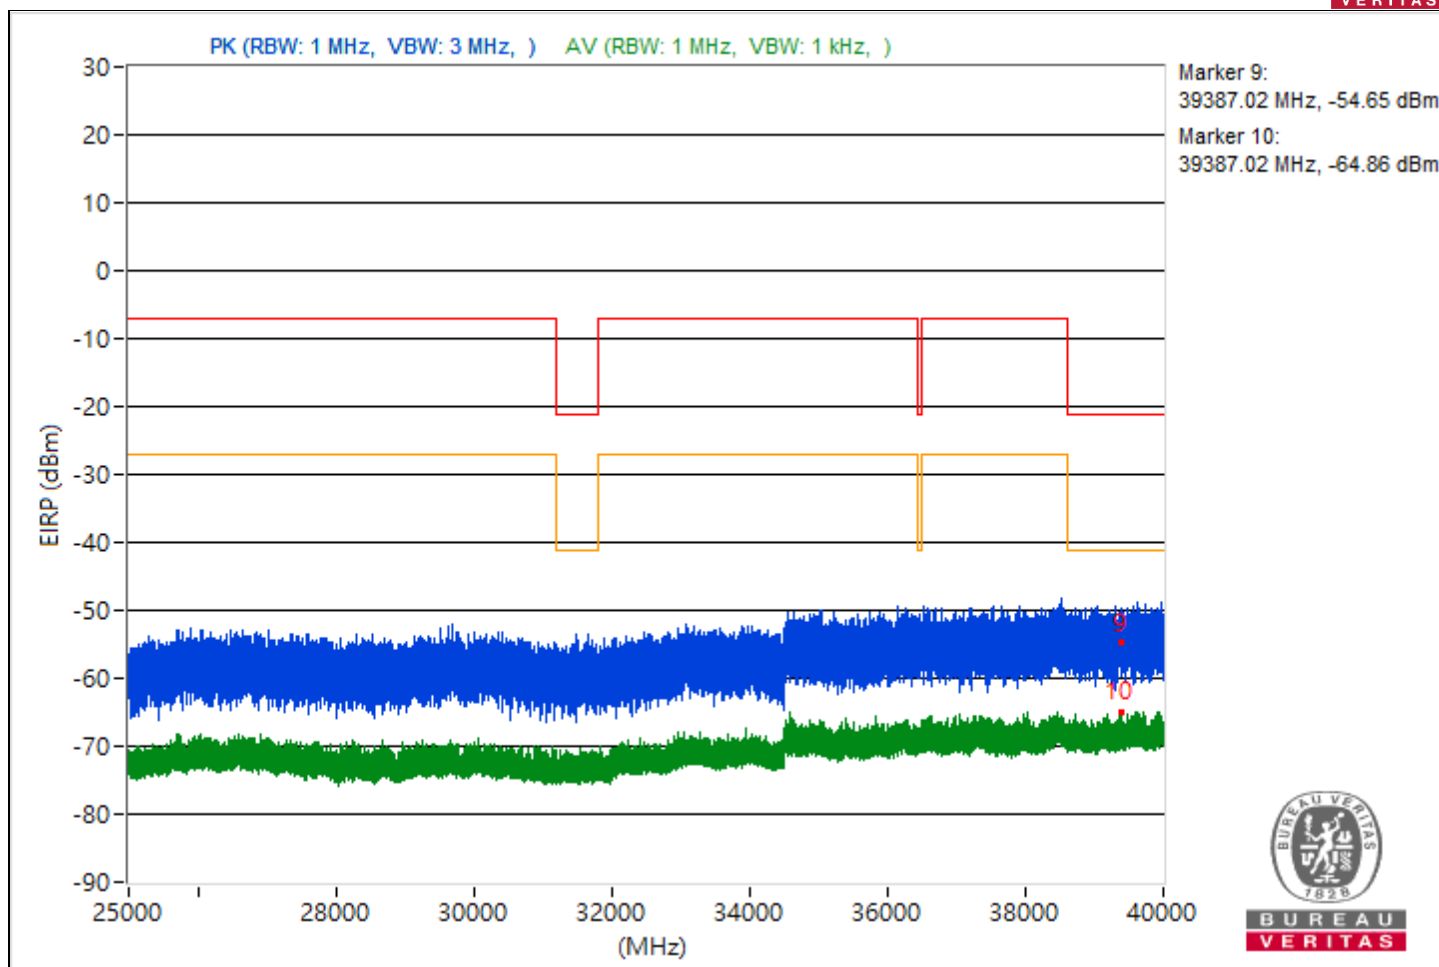


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.51	44.81 PK	74	-29.19	-58.82	8.37	-50.45
2	5449.51	36.22 AV	54	-17.78	-67.41	8.37	-59.04
3	7263.06	45.14 PK	74	-28.86	-58.49	8.37	-50.12
4	7263.06	37.09 AV	54	-16.91	-66.54	8.37	-58.17
5	19159.4	42.57 PK	74	-31.43	-61.06	8.37	-52.69
6	19159.4	34.25 AV	54	-19.75	-69.38	8.37	-61.01
7	23801.3	47.27 PK	74	-26.73	-56.36	8.37	-47.99
8	23801.3	35.95 AV	54	-18.05	-67.68	8.37	-59.31
9	39182.58	39.4 PK	74	-34.6	-64.23	8.37	-55.86
10	39182.58	30.4 AV	54	-23.6	-73.23	8.37	-64.86

Note: Margin value = Emission Level - Limit value

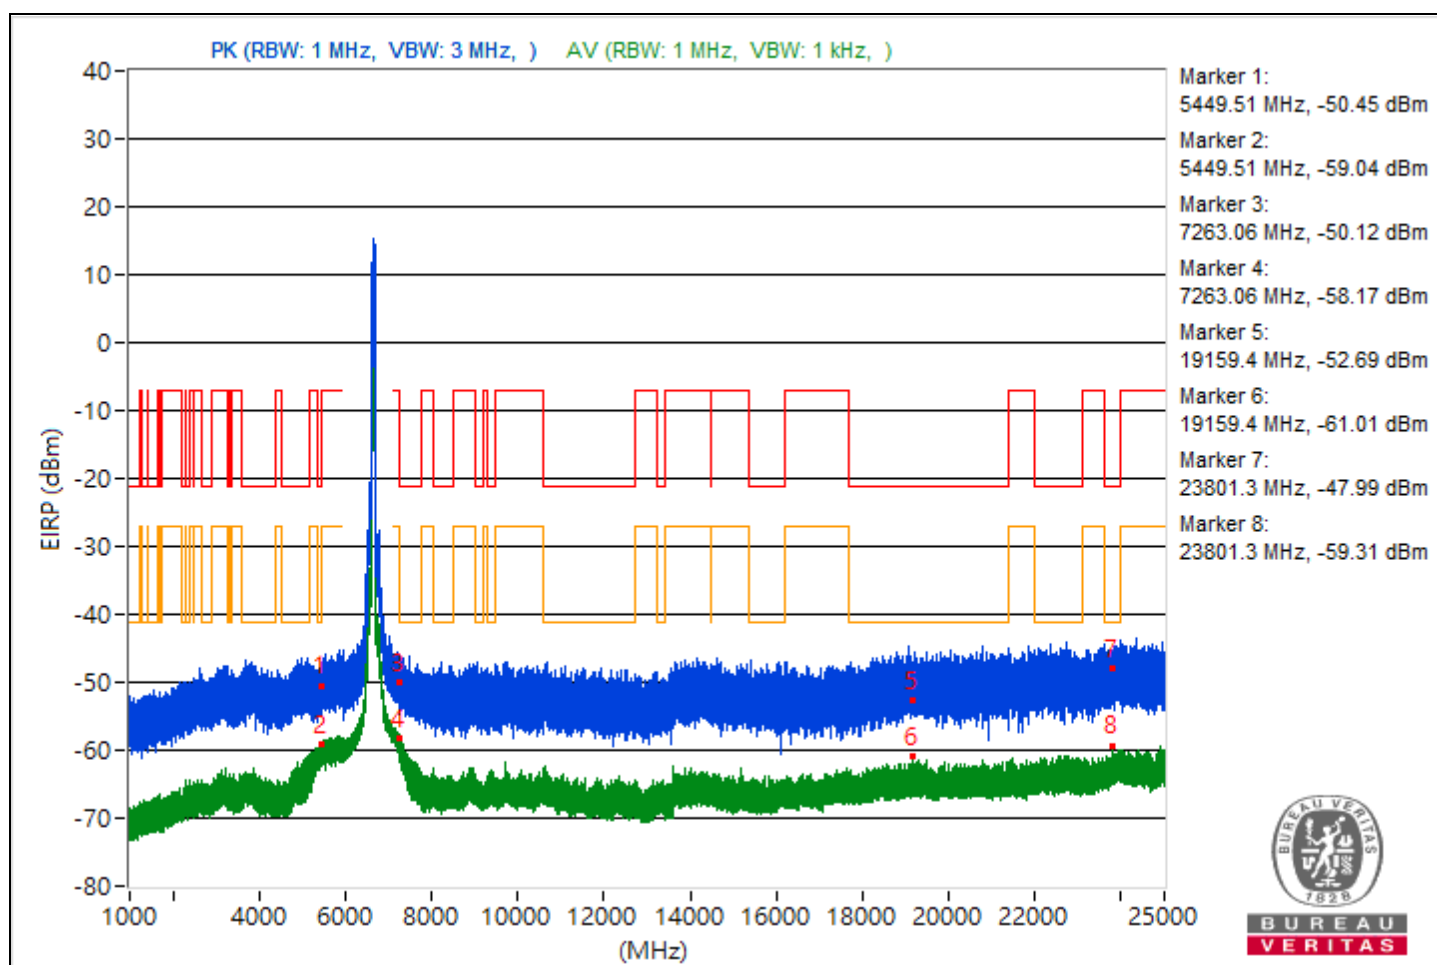

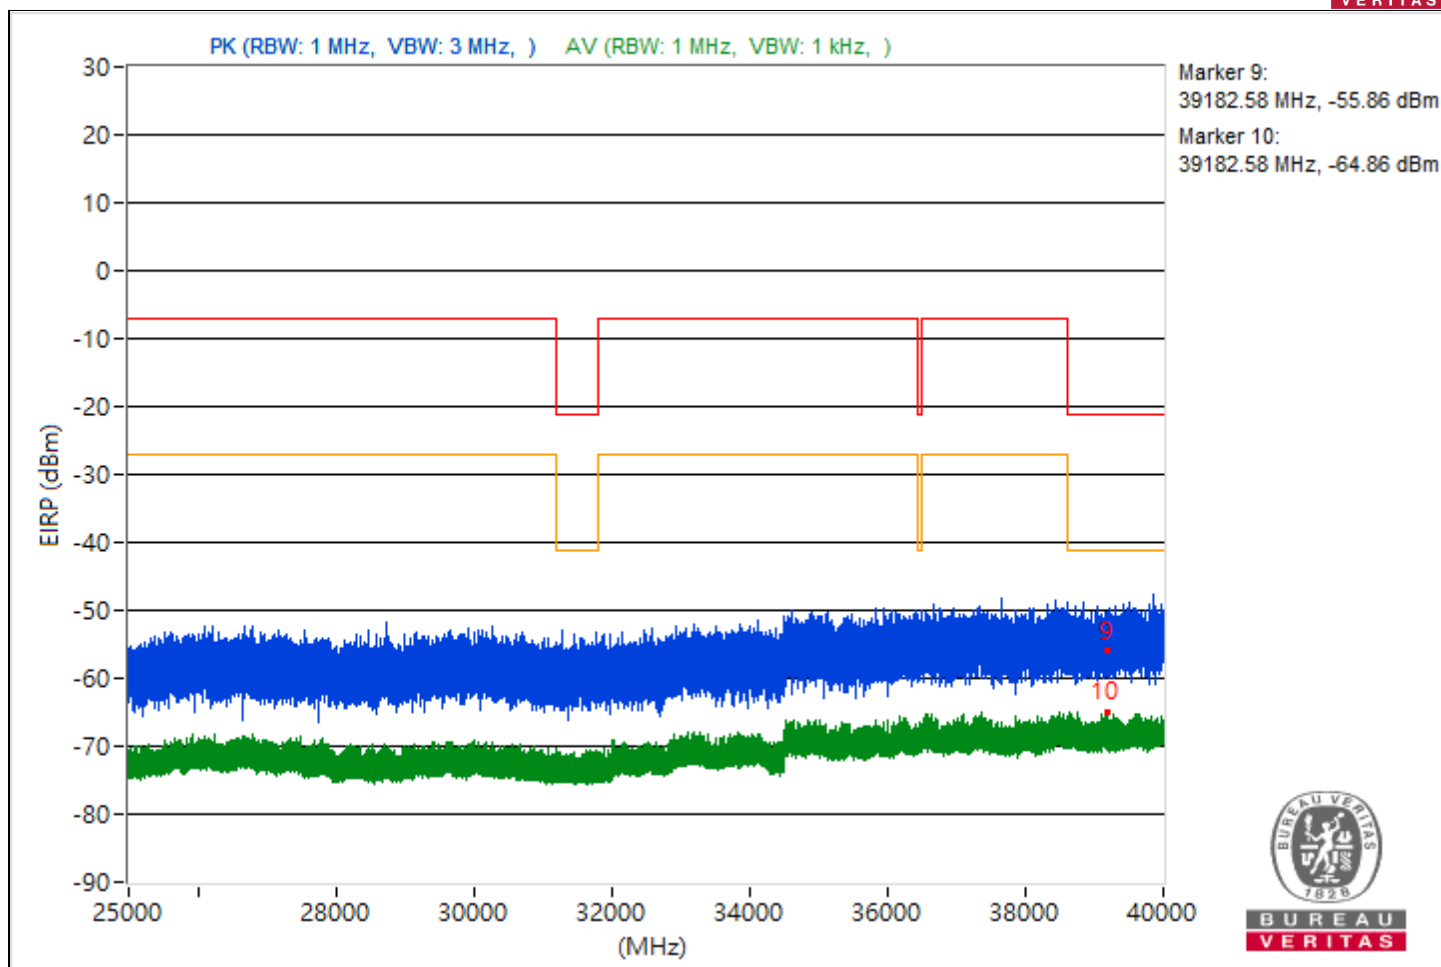


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5873.63	61.76 PK	88.26	-26.5	-41.87	8.37	-33.5
2	#5873.63	54.11 AV	68.26	-14.15	-49.52	8.37	-41.15
3	8033.33	52.87 PK	74	-21.13	-50.76	8.37	-42.39
4	8033.33	51.32 AV	54	-2.68	-52.31	8.37	-43.94
5	19261.2	45.69 PK	74	-28.31	-57.94	8.37	-49.57
6	19261.2	34.56 AV	54	-19.44	-69.07	8.37	-60.7
7	23925.4	47.42 PK	74	-26.58	-56.21	8.37	-47.84
8	23925.4	36.18 AV	54	-17.82	-67.45	8.37	-59.08
9	39136.36	40.57 PK	74	-33.43	-63.06	8.37	-54.69
10	39136.36	30.67 AV	54	-23.33	-72.96	8.37	-64.59

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

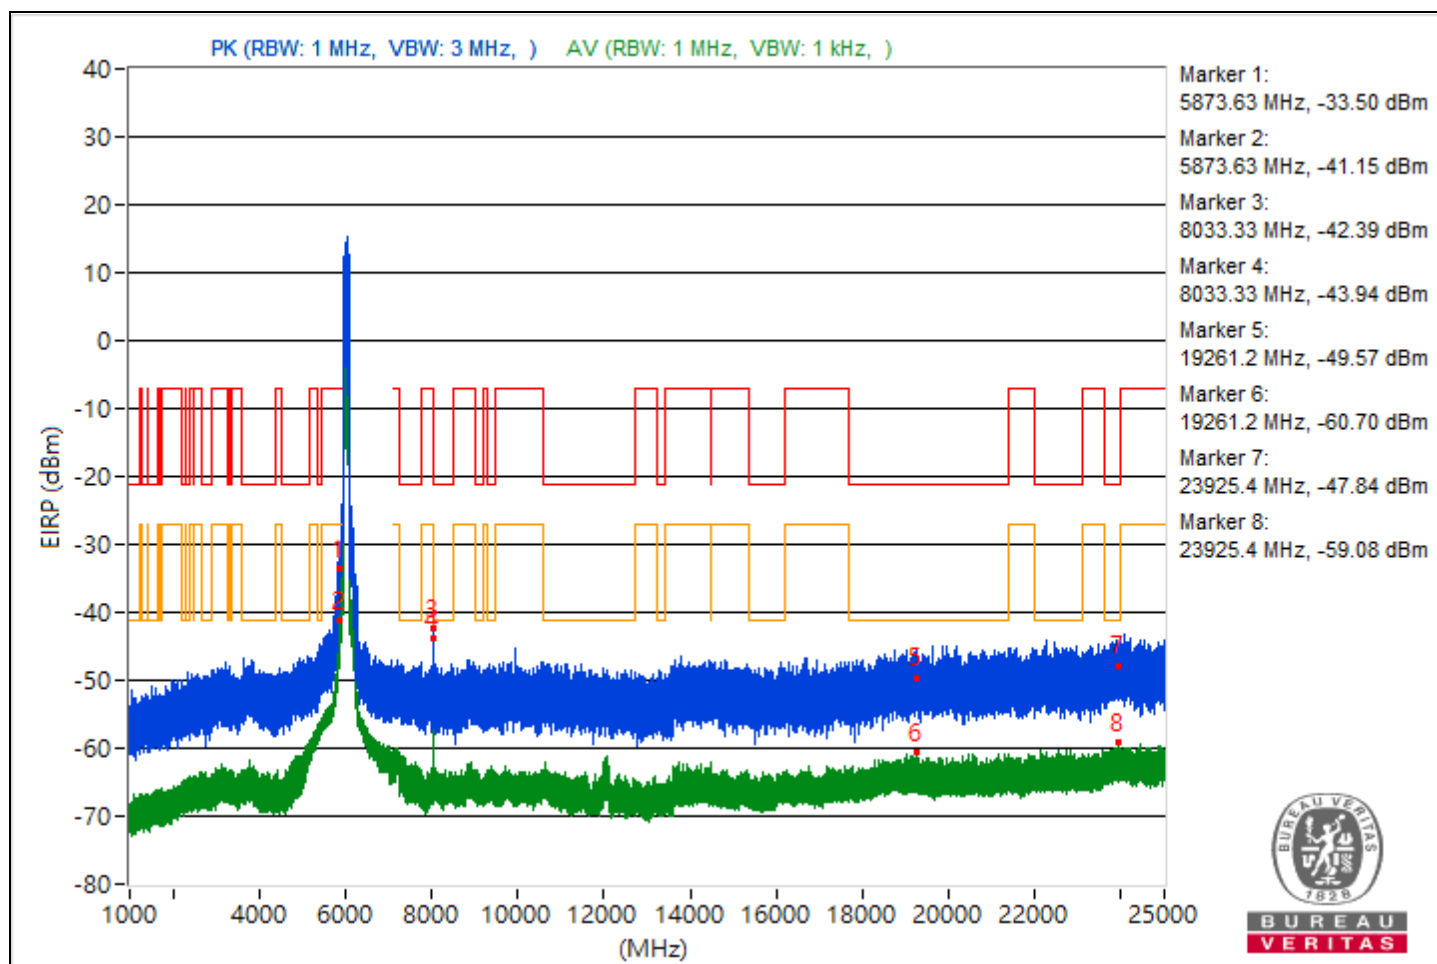





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.57	44.47 PK	74	-29.53	-59.16	8.37	-50.79
2	5447.57	37.56 AV	54	-16.44	-66.07	8.37	-57.7
3	8460	48.89 PK	74	-25.11	-54.74	8.37	-46.37
4	8460	45.57 AV	54	-8.43	-58.06	8.37	-49.69
5	19880.3	44.95 PK	74	-29.05	-58.68	8.37	-50.31
6	19880.3	34.38 AV	54	-19.62	-69.25	8.37	-60.88
7	23931.2	48.45 PK	74	-25.55	-55.18	8.37	-46.81
8	23931.2	35.79 AV	54	-18.21	-67.84	8.37	-59.47
9	39994.76	41.58 PK	74	-32.42	-62.05	8.37	-53.68
10	39994.76	30.7 AV	54	-23.3	-72.93	8.37	-64.56

Note: Margin value = Emission Level - Limit value

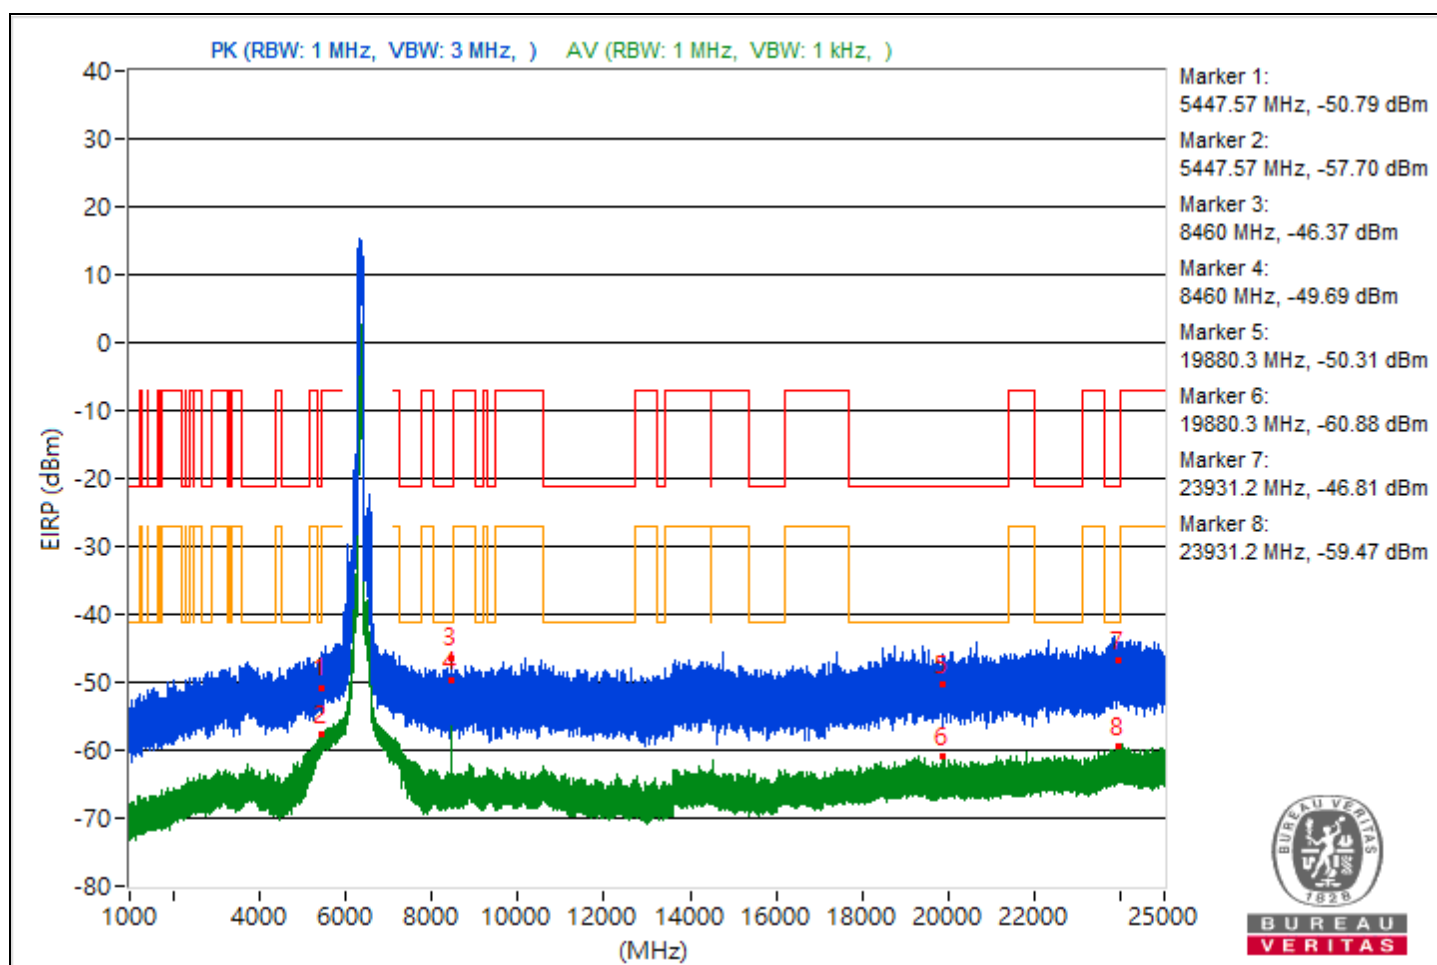


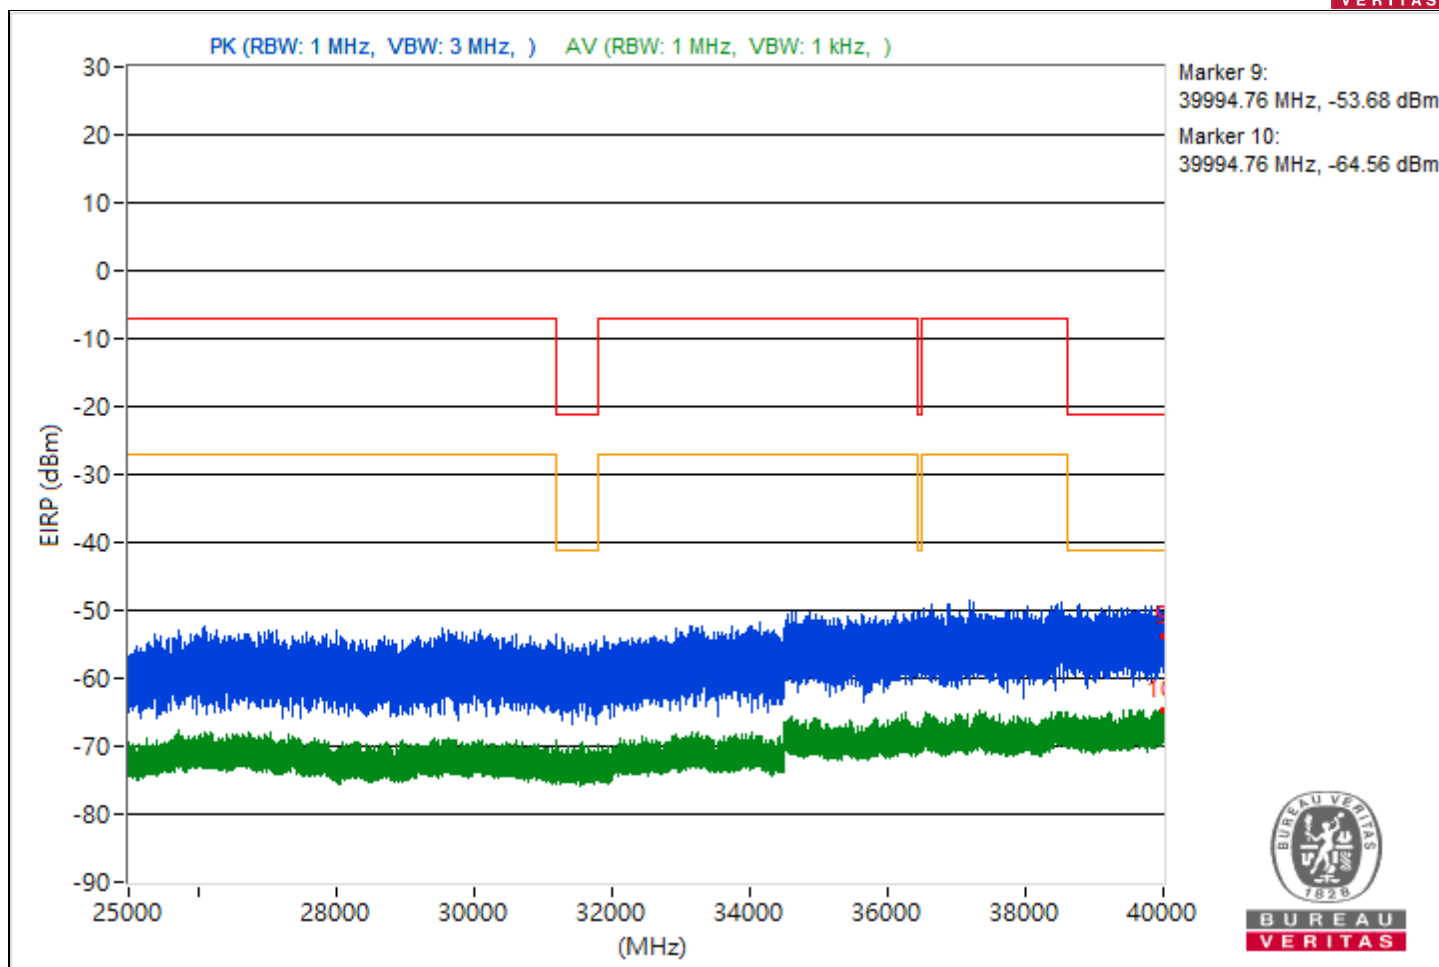


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.28	44.75 PK	74	-29.25	-58.88	8.37	-50.51
2	5449.28	36.51 AV	54	-17.49	-67.12	8.37	-58.75
3	7286.86	45.6 PK	74	-28.4	-58.03	8.37	-49.66
4	7286.86	37.2 AV	54	-16.8	-66.43	8.37	-58.06
5	21374.4	46.96 PK	74	-27.04	-56.67	8.37	-48.3
6	21374.4	34.57 AV	54	-19.43	-69.06	8.37	-60.69
7	23655.5	45.03 PK	74	-28.97	-58.6	8.37	-50.23
8	23655.5	35.91 AV	54	-18.09	-67.72	8.37	-59.35
9	39618.84	42.06 PK	74	-31.94	-61.57	8.37	-53.2
10	39618.84	31.07 AV	54	-22.93	-72.56	8.37	-64.19

Note: Margin value = Emission Level - Limit value

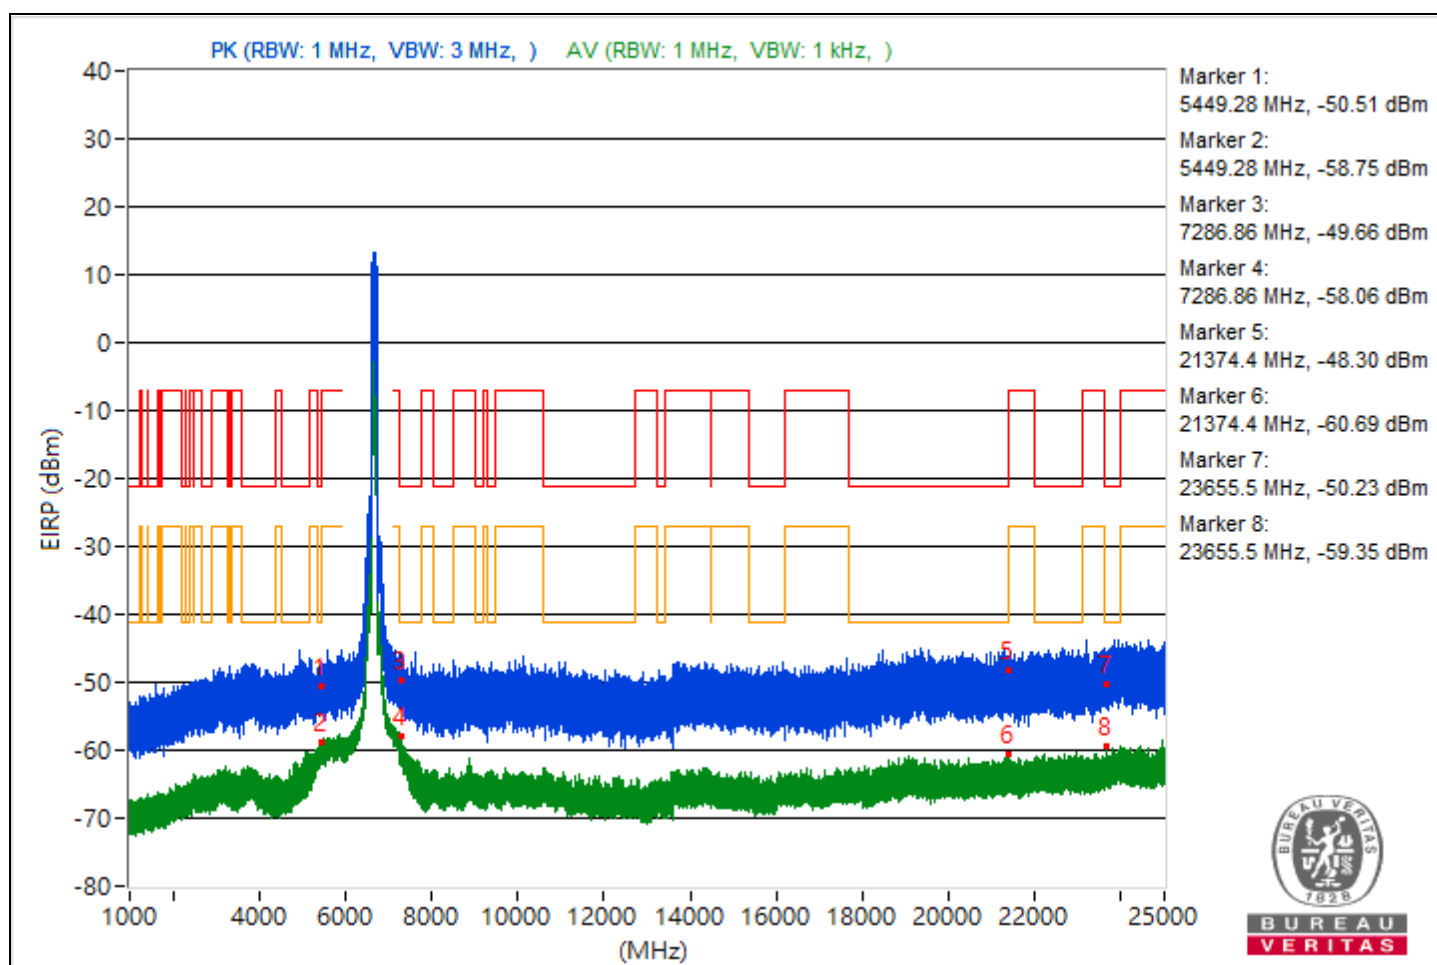

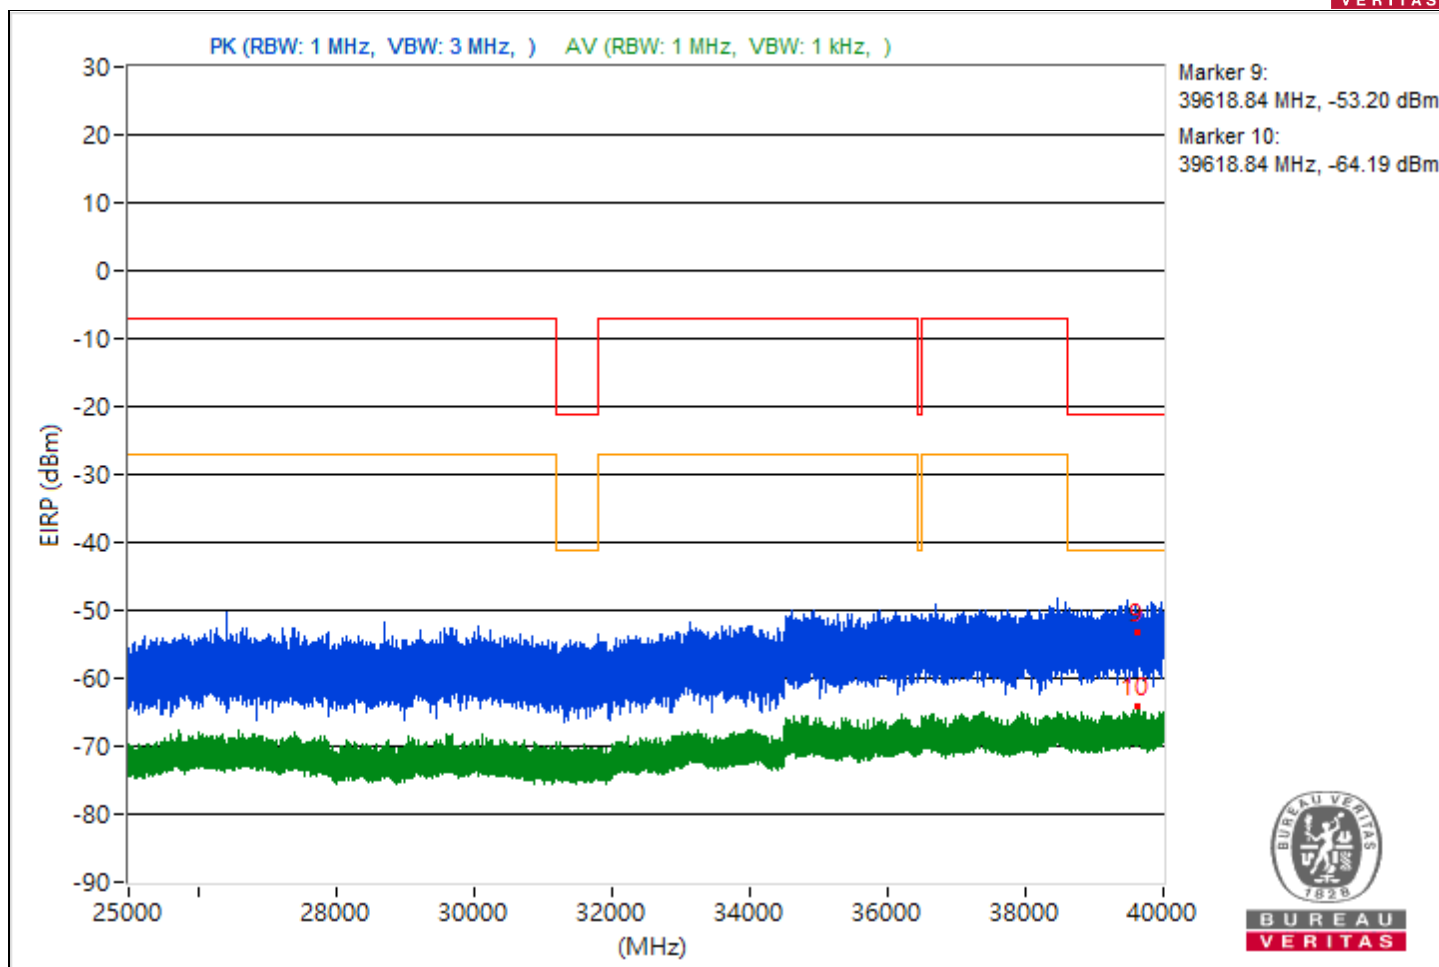

Conducted Band Edges


1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.85	119.84 PK			16.21	8.37	24.58
2	*5955.85	111.89 AV			8.26	8.37	16.63
3	#5924.73	69.85 PK	88.26	-18.41	-33.78	8.37	-25.41
4	#5924.73	60.84 AV	68.26	-7.42	-42.79	8.37	-34.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

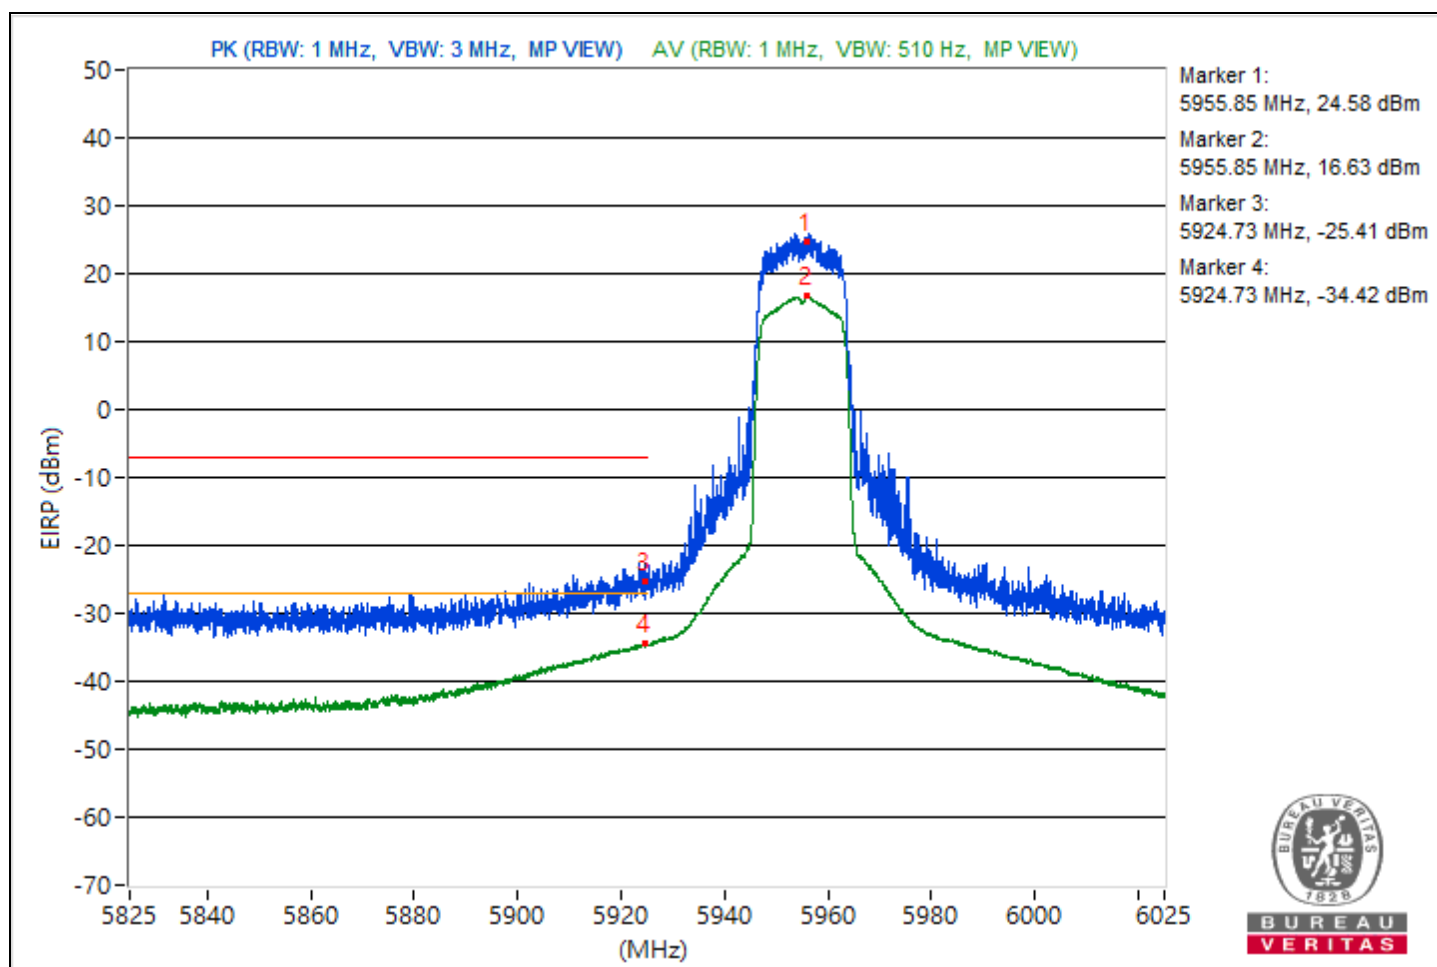


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6854.09	121.02 PK			17.39	8.37	25.76
2	*6854.09	112.27 AV			8.64	8.37	17.01
3	#7203.61	64.81 PK	88.26	-23.45	-38.82	8.37	-30.45
4	#7203.61	52.78 AV	68.26	-15.48	-50.85	8.37	-42.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

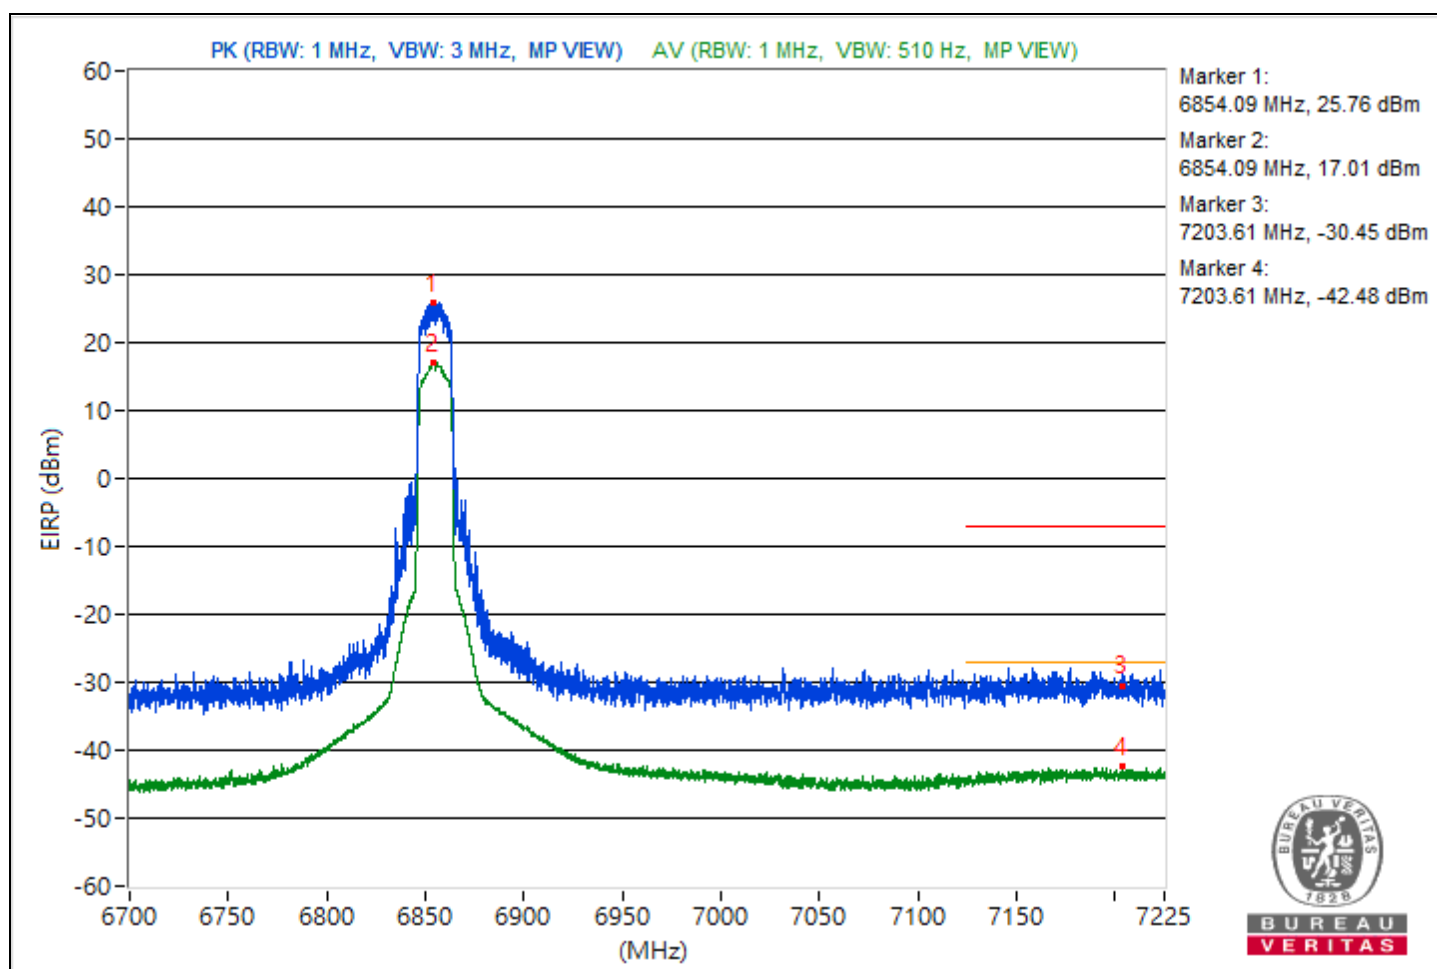


1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.05	120.15 PK			16.52	8.37	24.89
2	*5956.05	110.67 AV			7.04	8.37	15.41
3	#5924.82	66.97 PK	88.26	-21.29	-36.66	8.37	-28.29
4	#5924.82	60.17 AV	68.26	-8.09	-43.46	8.37	-35.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

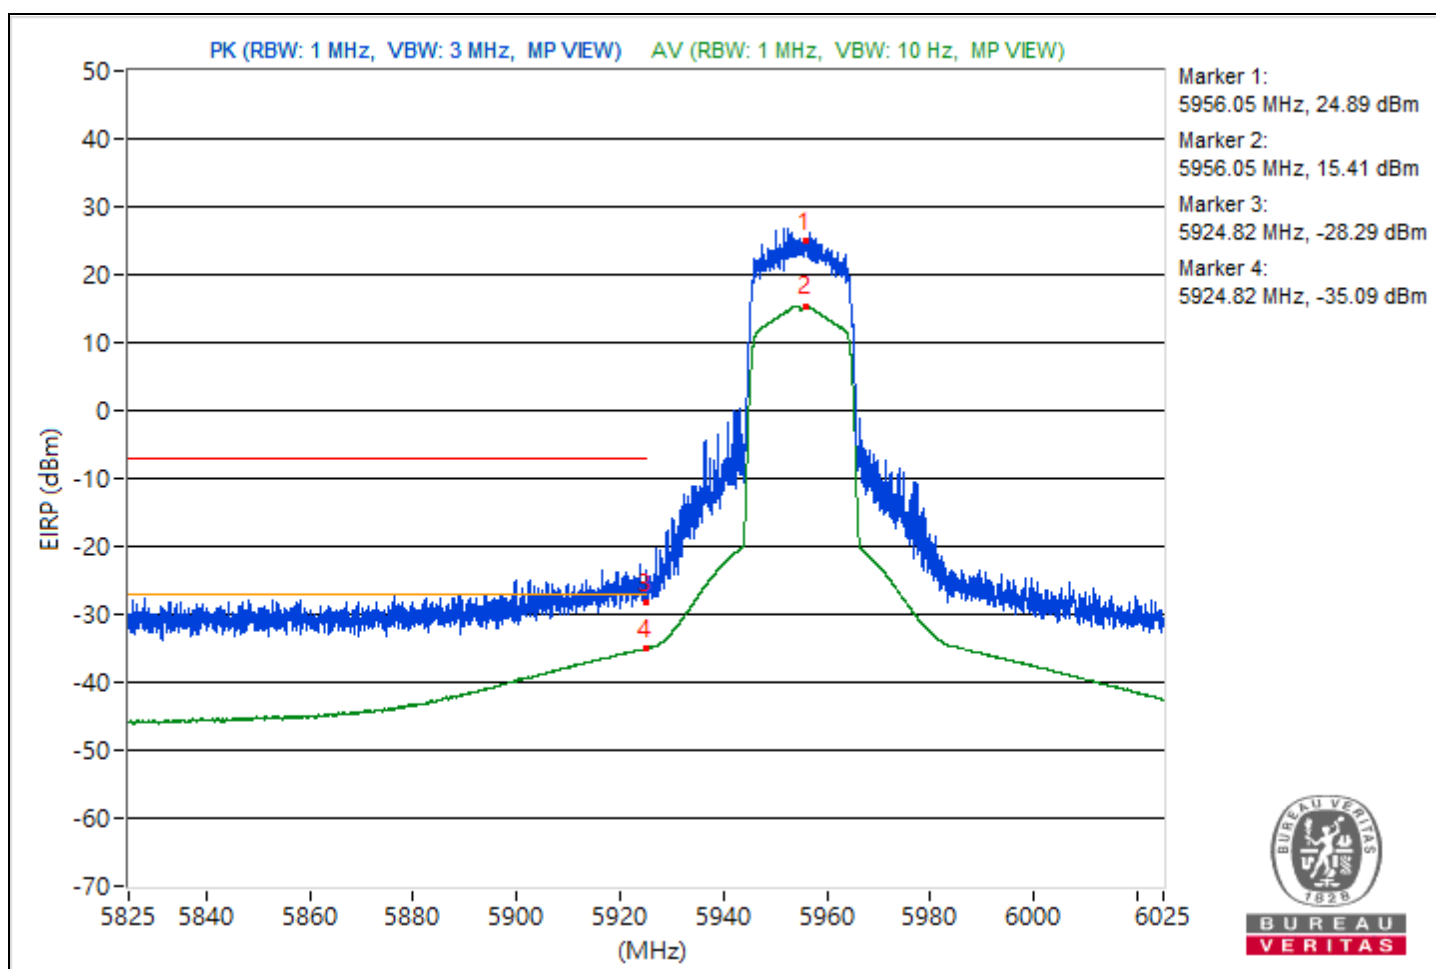


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6854.09	120.54 PK			16.91	8.37	25.28
2	*6854.09	110.66 AV			7.03	8.37	15.4
3	#7205.64	64.74 PK	88.26	-23.52	-38.89	8.37	-30.52
4	#7205.64	49.99 AV	68.26	-18.27	-53.64	8.37	-45.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

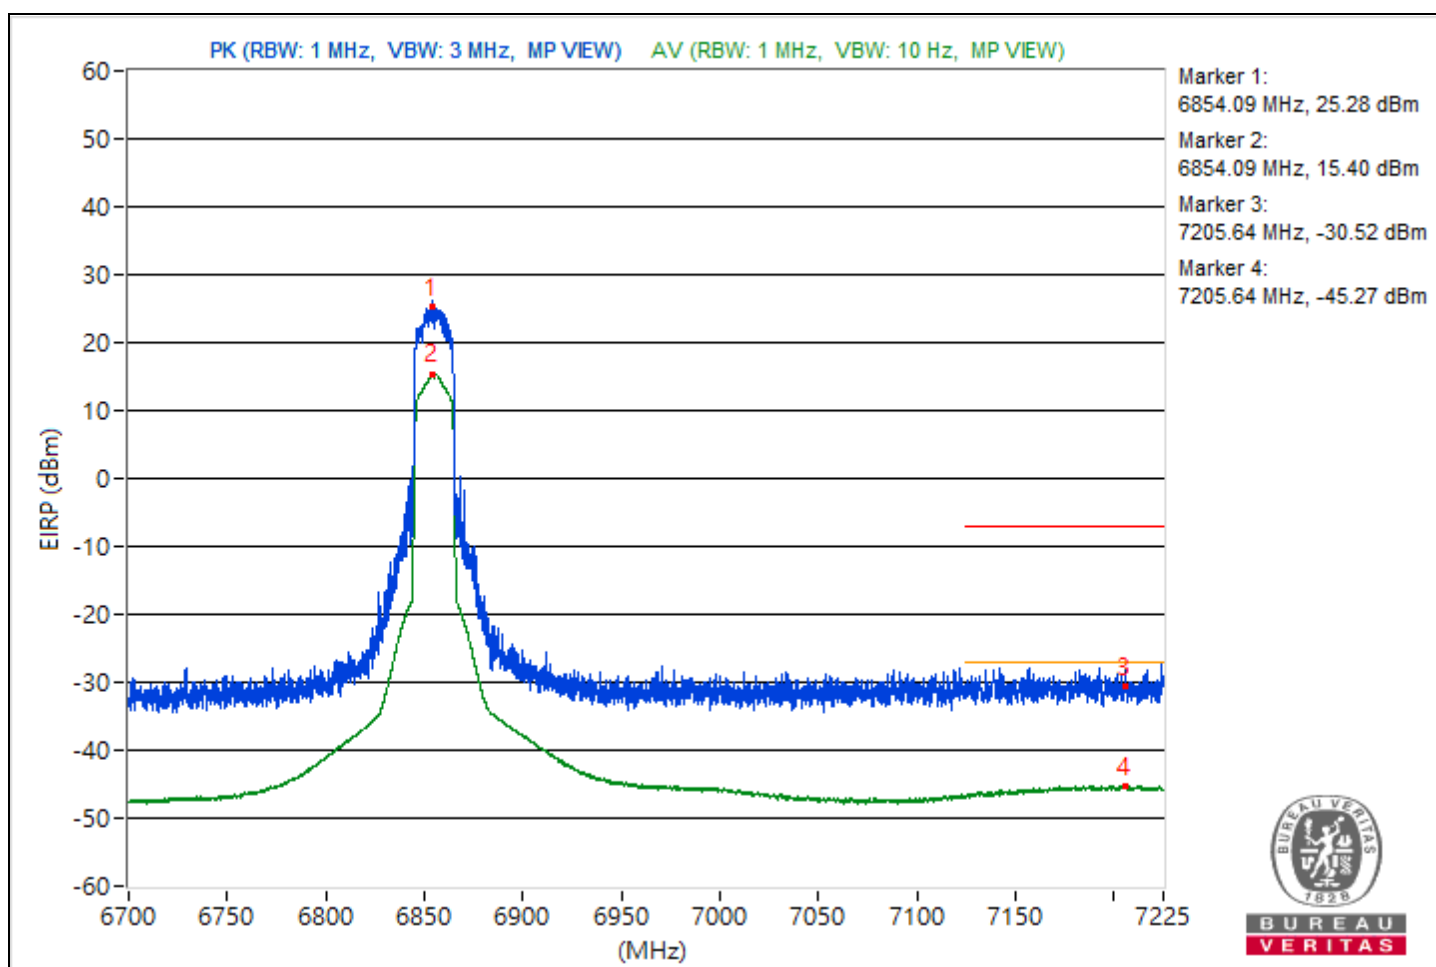


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5963.62	117.16 PK			13.53	8.37	21.9
2	*5963.62	108.01 AV			4.38	8.37	12.75
3	#5924.98	78.82 PK	88.26	-9.44	-24.81	8.37	-16.44
4	#5924.98	66.16 AV	68.26	-2.1	-37.47	8.37	-29.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

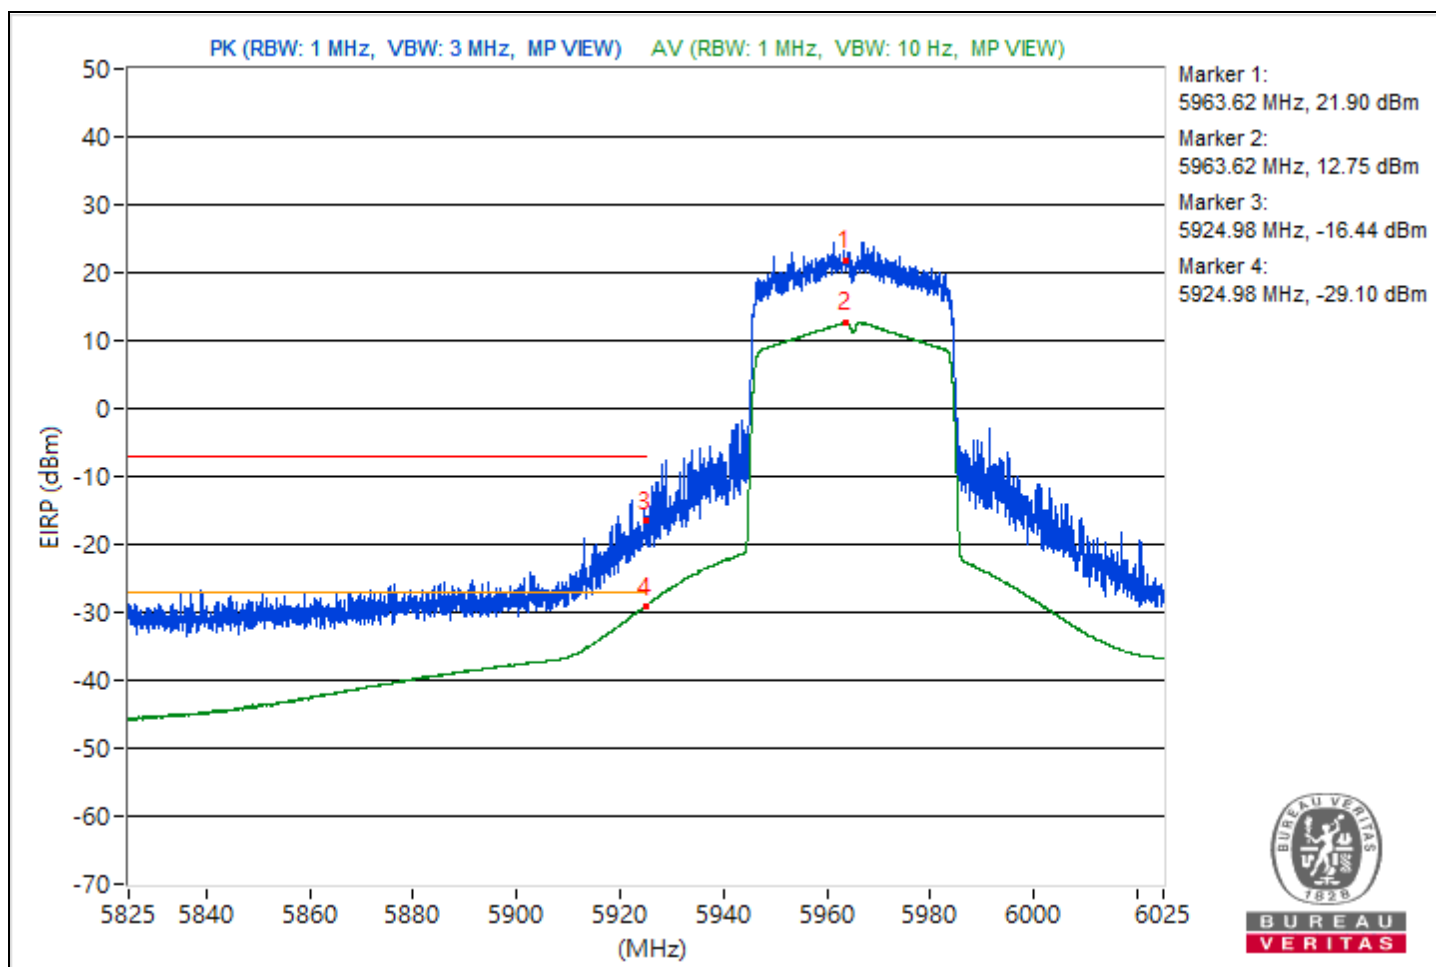


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6843.65	116.22 PK			12.59	8.37	20.96
2	*6843.65	106.98 AV			3.35	8.37	11.72
3	#7193.63	63.67 PK	88.26	-24.59	-39.96	8.37	-31.59
4	#7193.63	50.2 AV	68.26	-18.06	-53.43	8.37	-45.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

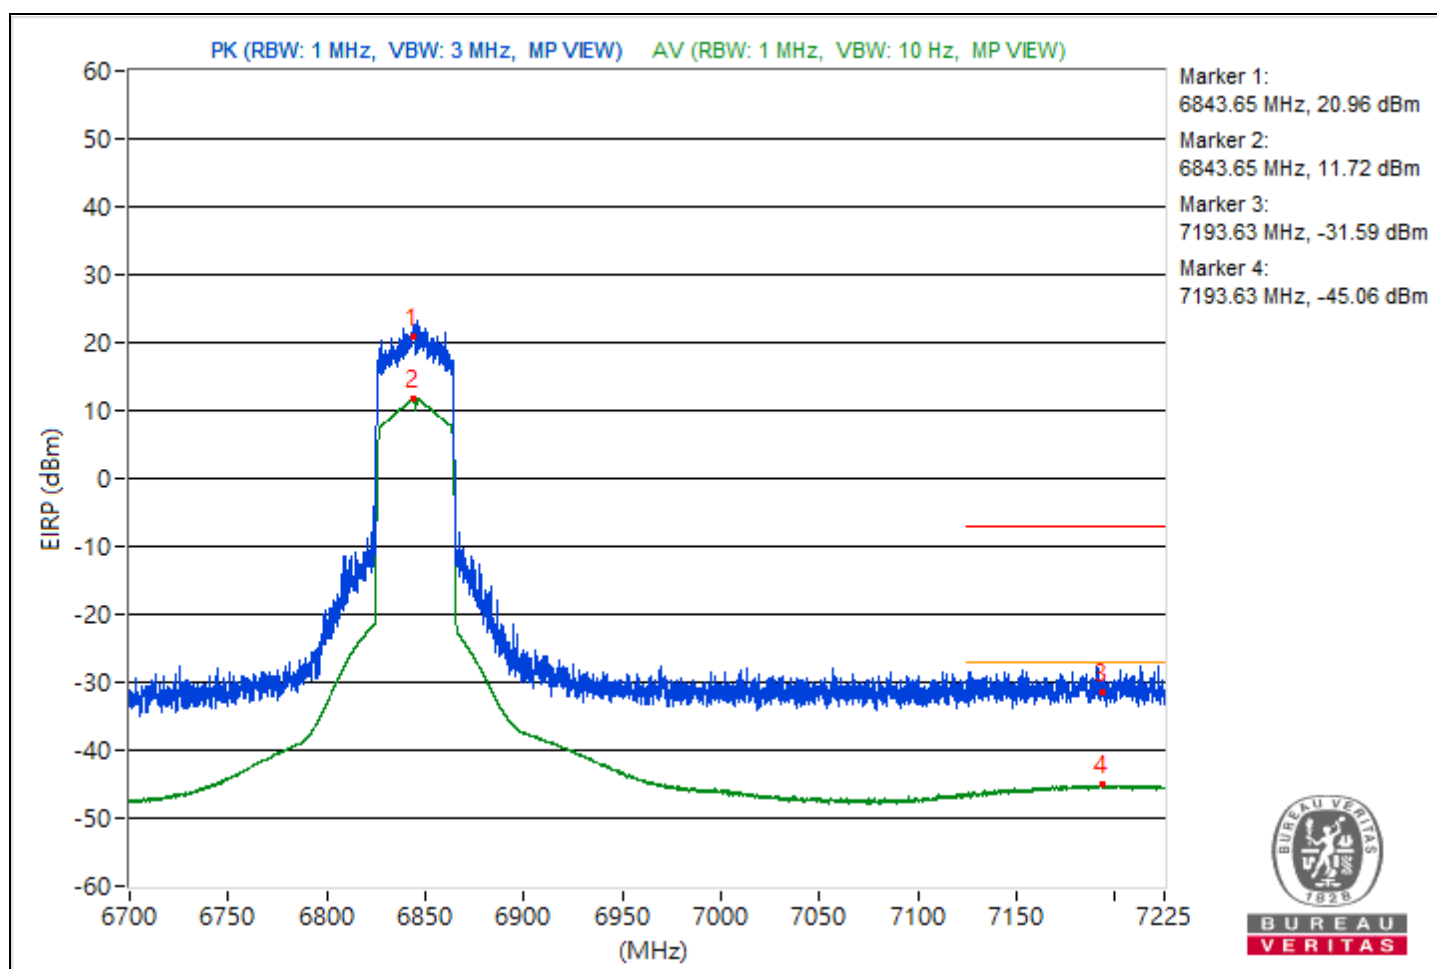


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5983.4	112.85 PK			9.22	8.37	17.59
2	*5983.4	104.89 AV			1.26	8.37	9.63
3	#5924.87	77.3 PK	88.26	-10.96	-26.33	8.37	-17.96
4	#5924.87	67.11 AV	68.26	-1.15	-36.52	8.37	-28.15

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

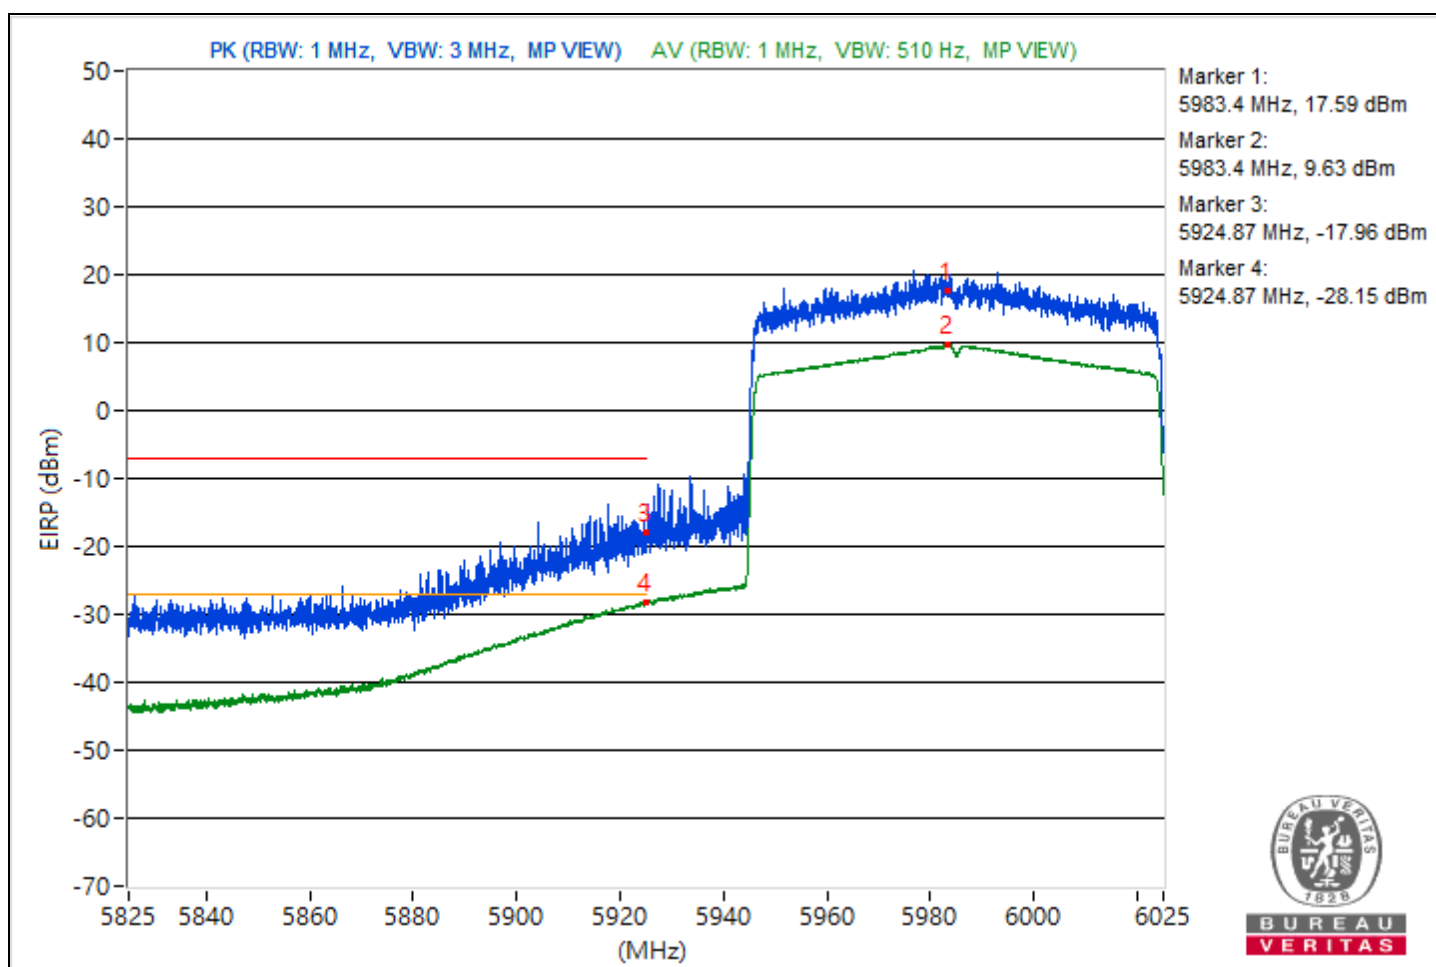


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#6866.69	112.66 PK			9.03	8.37	17.4
2	#6866.69	104.31 AV			0.68	8.37	9.05
3	#7207.61	64.26 PK	88.26	-24	-39.37	8.37	-31
4	#7207.61	52.8 AV	68.26	-15.46	-50.83	8.37	-42.46

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band, the limit was restricted at the Conducted Out of Band Emissions.
3. " # ": The radiated frequency is out of the restricted band.

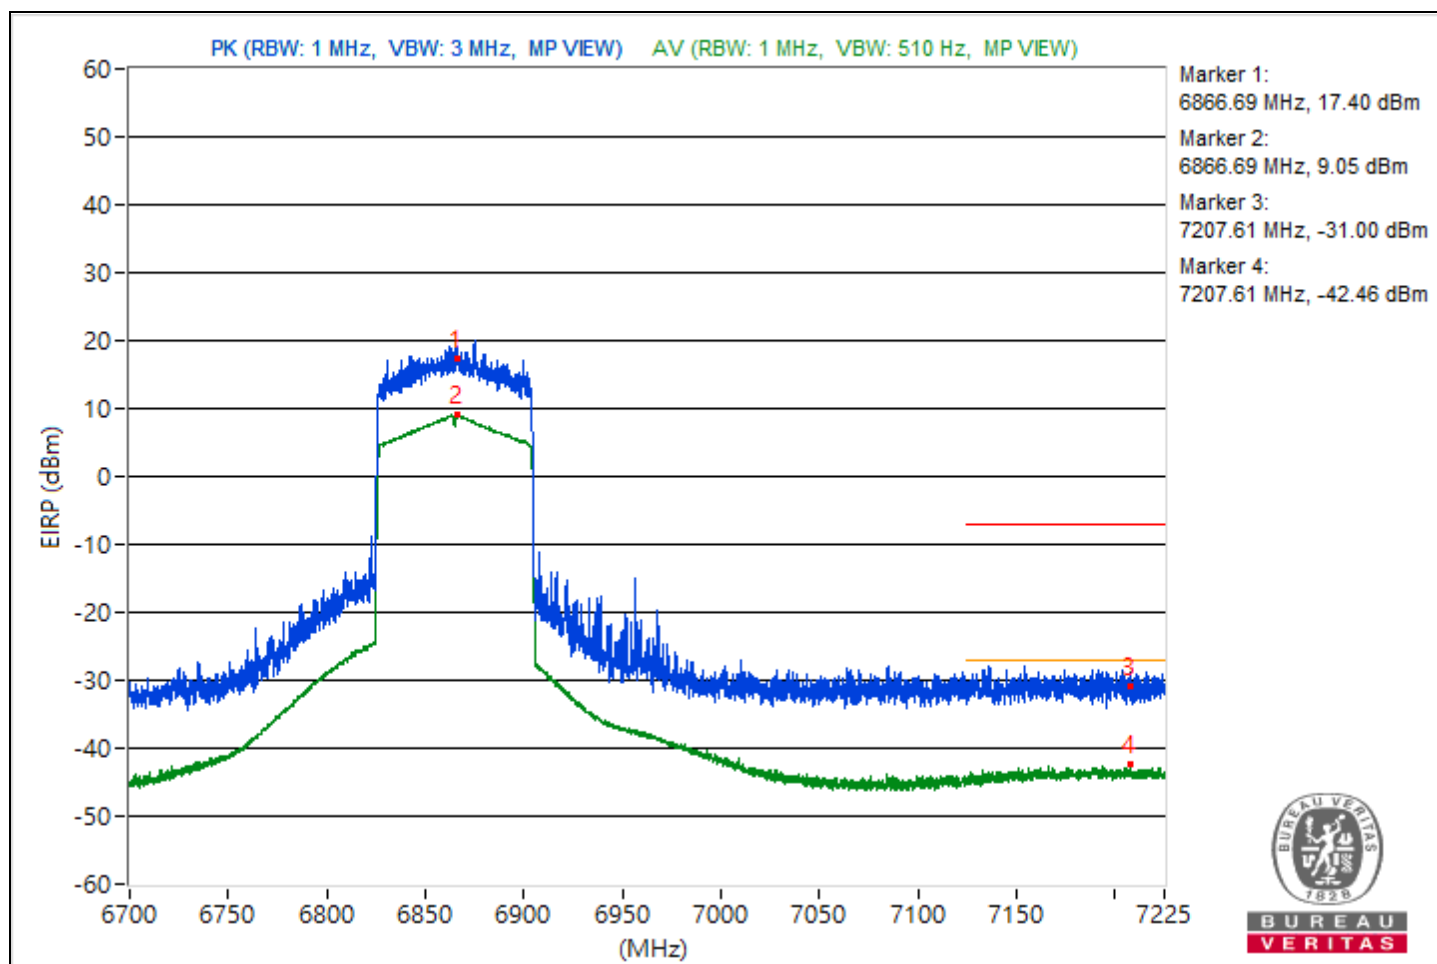


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6021.8	109.66 PK			6.03	8.37	14.4
2	*6021.8	99.88 AV			-3.75	8.37	4.62
3	#5921.05	69.69 PK	88.26	-18.57	-33.94	8.37	-25.57
4	#5921.05	62.03 AV	68.26	-6.23	-41.6	8.37	-33.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

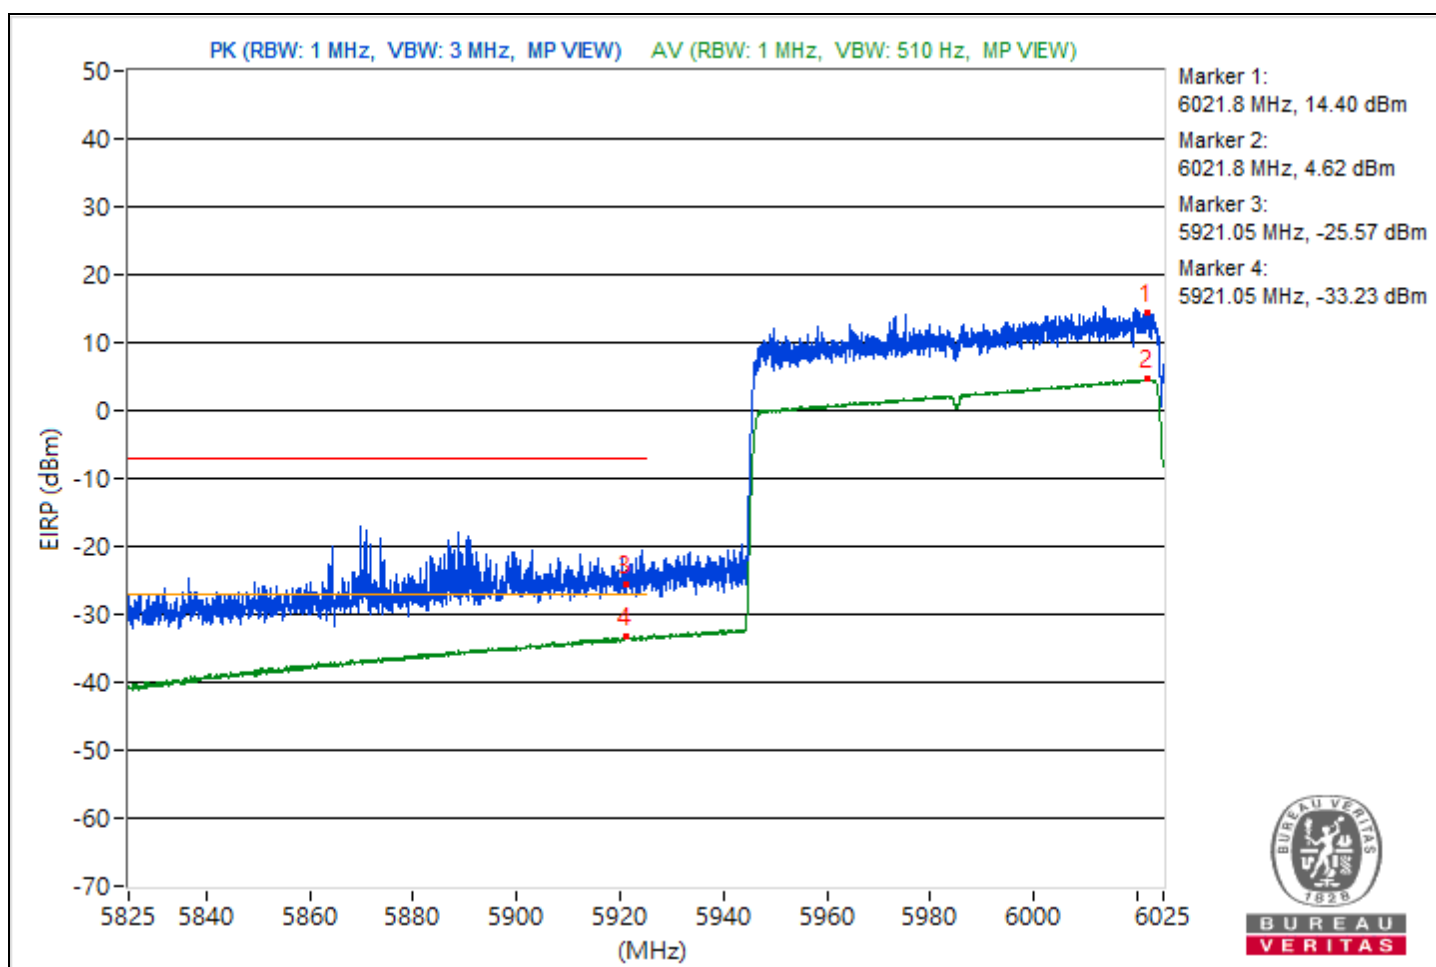


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700.72	104.52 PK			0.89	8.37	9.26
2	*6700.72	96.89 AV			-6.74	8.37	1.63
3	#7216.01	64.04 PK	88.26	-24.22	-39.59	8.37	-31.22
4	#7216.01	52.84 AV	68.26	-15.42	-50.79	8.37	-42.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

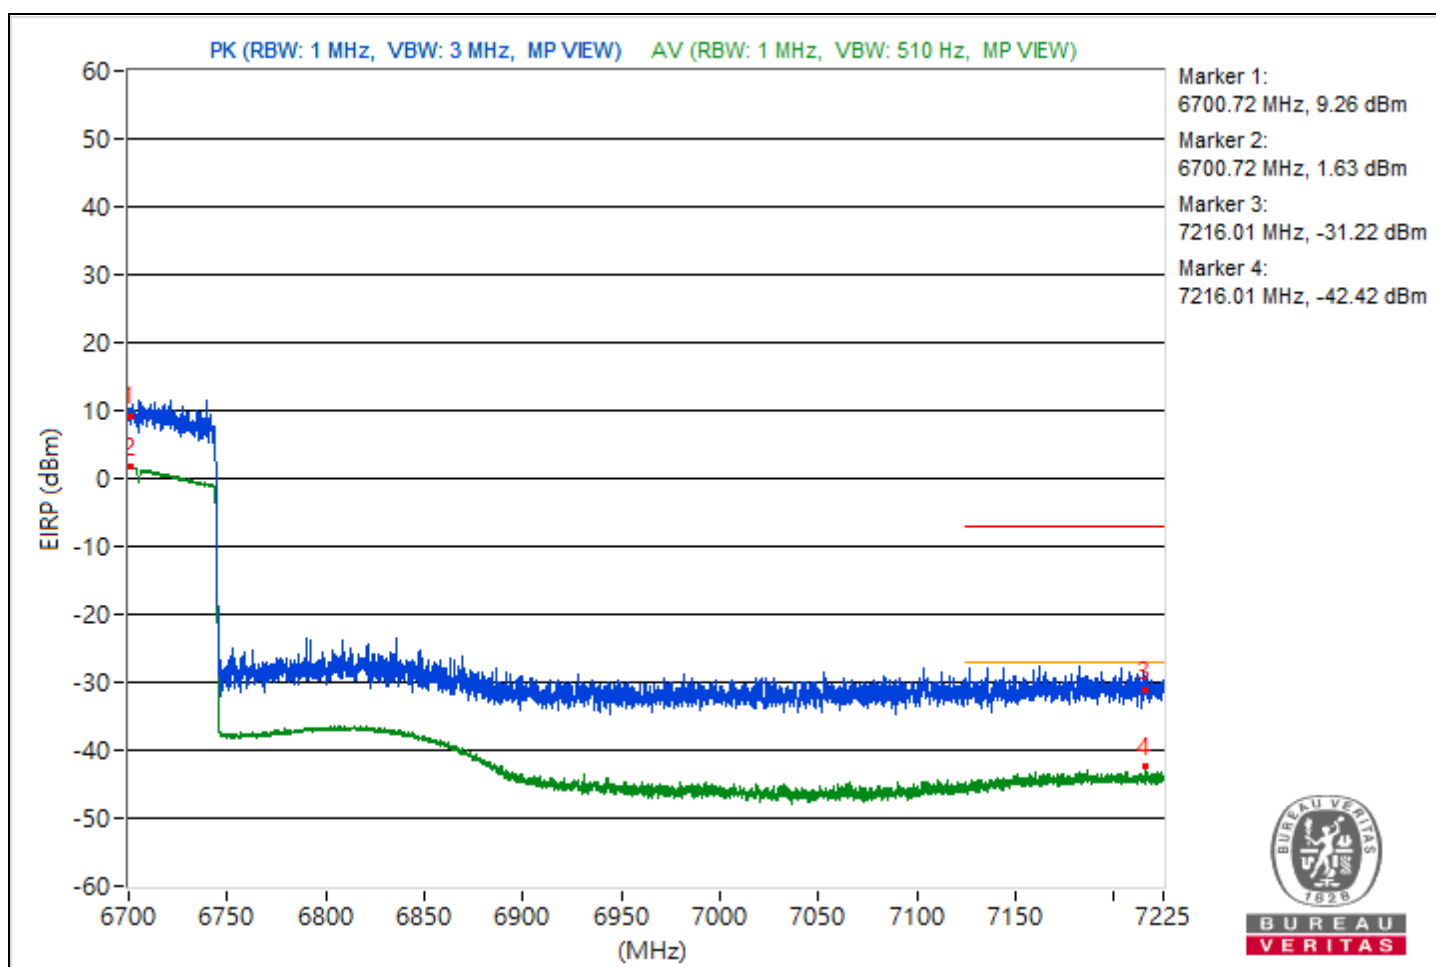


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.52	120.33 PK			16.7	8.37	25.07
2	*5946.52	111.71 AV			8.08	8.37	16.45
3	#5912.57	65.75 PK	88.26	-22.51	-37.88	8.37	-29.51
4	#5912.57	53.95 AV	68.26	-14.31	-49.68	8.37	-41.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

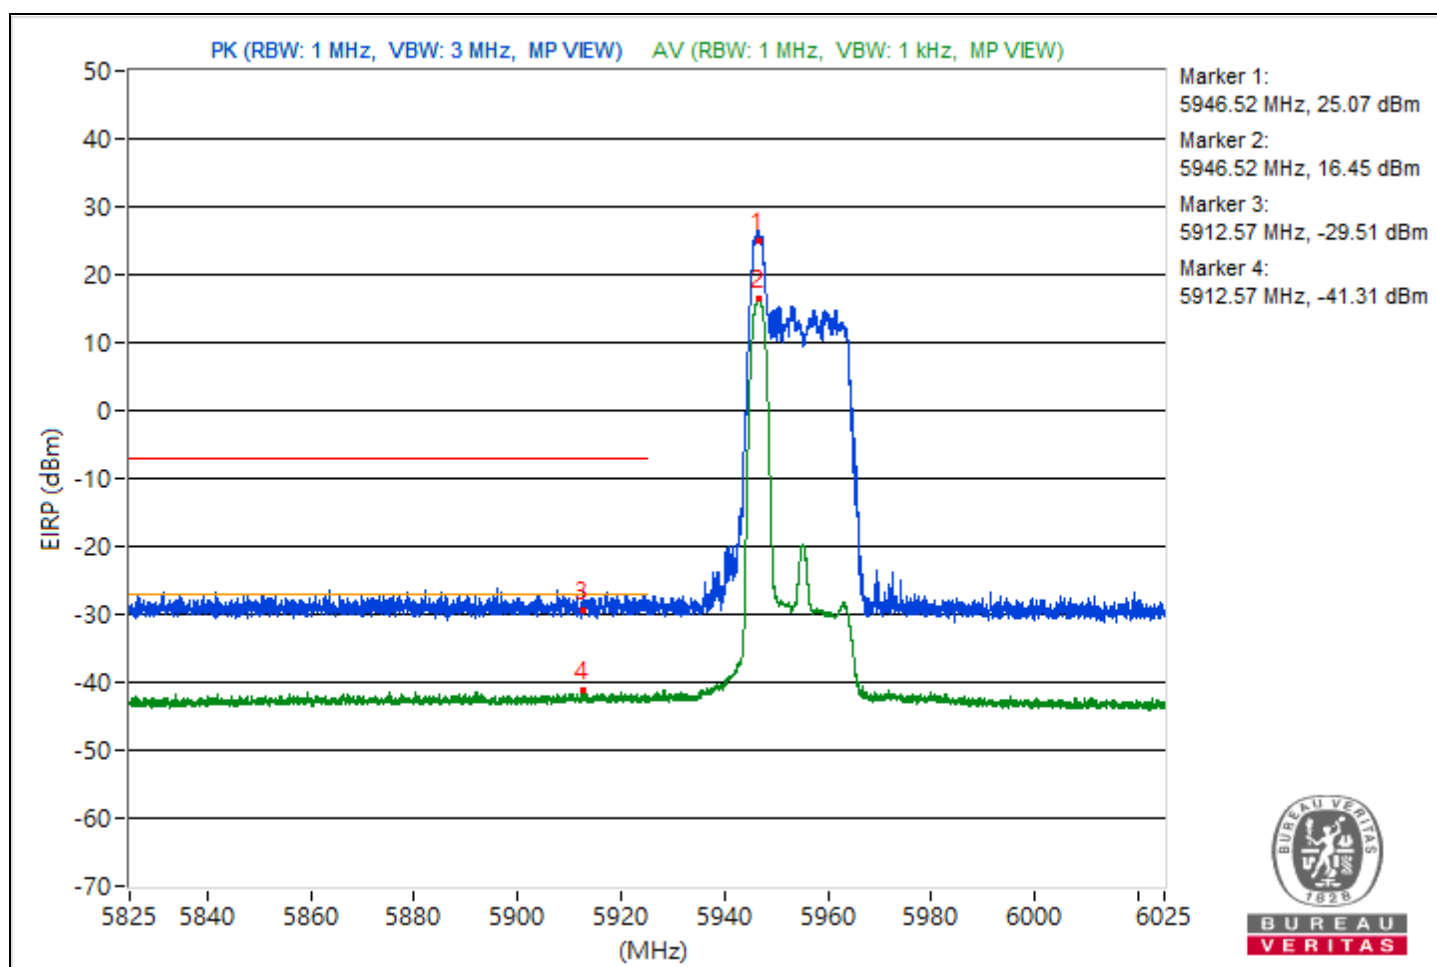


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6863.54	120.12 PK			16.49	8.37	24.86
2	*6863.54	111.39 AV			7.76	8.37	16.13
3	#7164.56	65.84 PK	88.26	-22.42	-37.79	8.37	-29.42
4	#7164.56	54.08 AV	68.26	-14.18	-49.55	8.37	-41.18

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

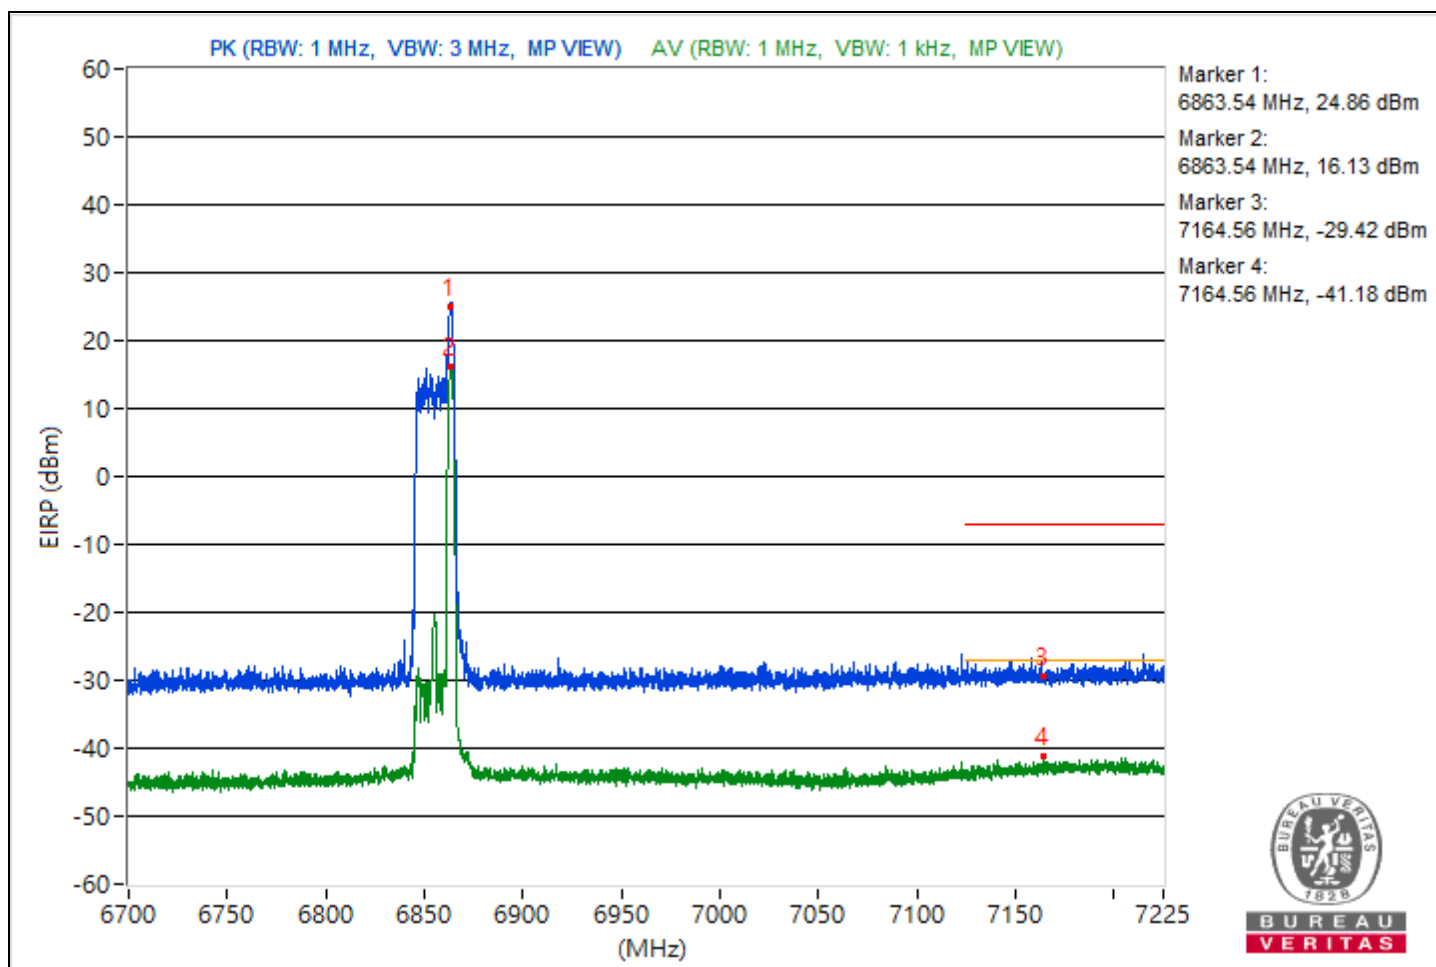


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.87	121.32 PK			17.69	8.37	26.06
2	*5947.87	111.95 AV			8.32	8.37	16.69
3	#5884.3	66.08 PK	88.26	-22.18	-37.55	8.37	-29.18
4	#5884.3	54.09 AV	68.26	-14.17	-49.54	8.37	-41.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

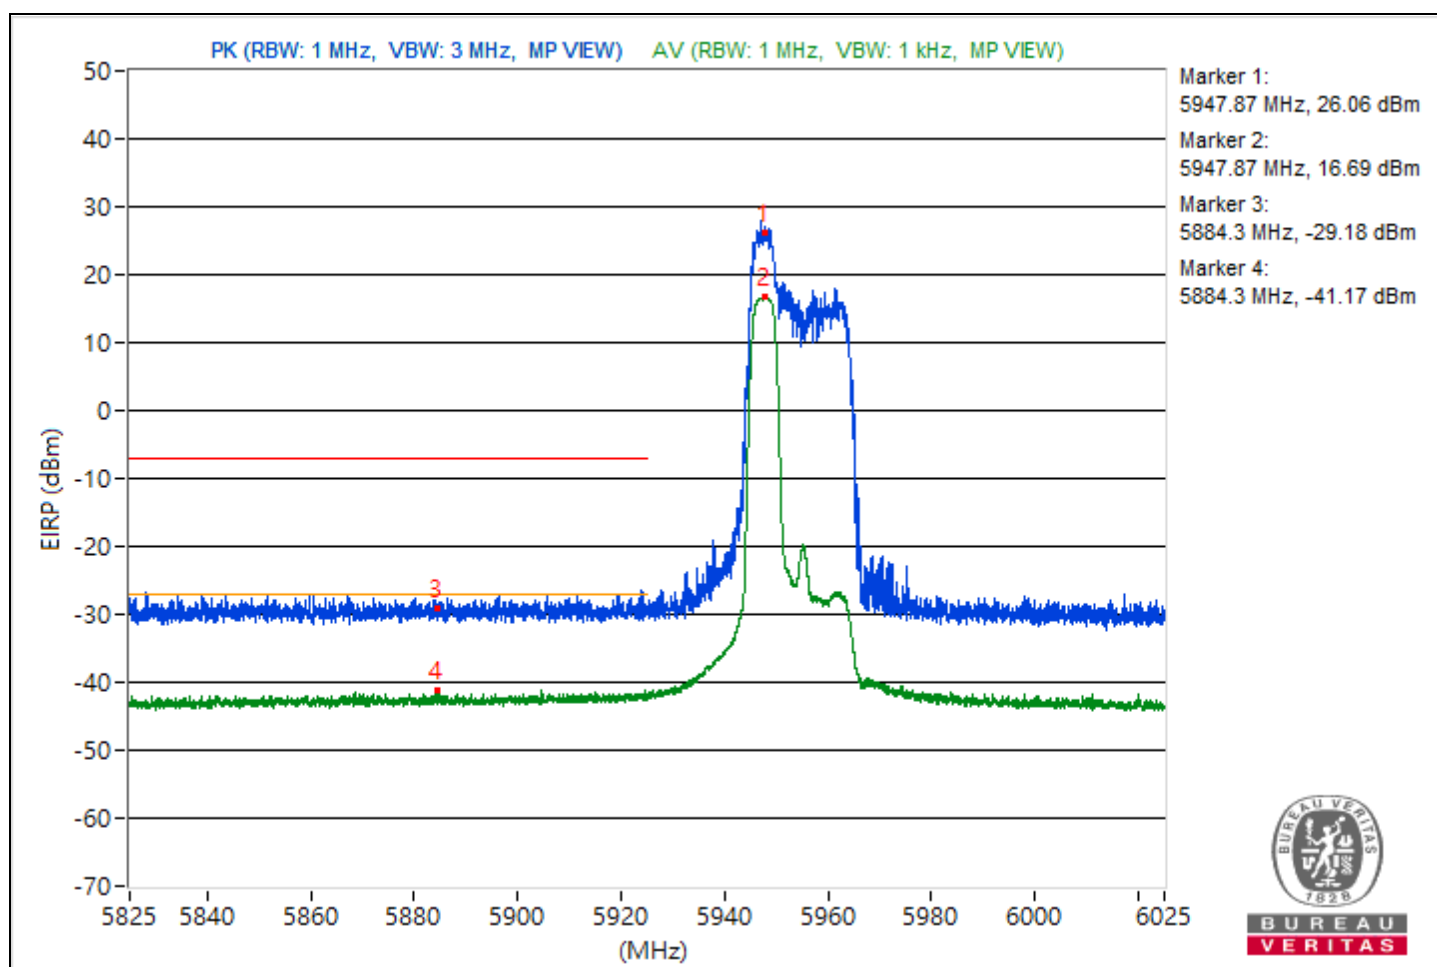


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6863.21	119.94 PK			16.31	8.37	24.68
2	*6863.21	111.52 AV			7.89	8.37	16.26
3	#7194.35	65.56 PK	88.26	-22.7	-38.07	8.37	-29.7
4	#7194.35	53.54 AV	68.26	-14.72	-50.09	8.37	-41.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

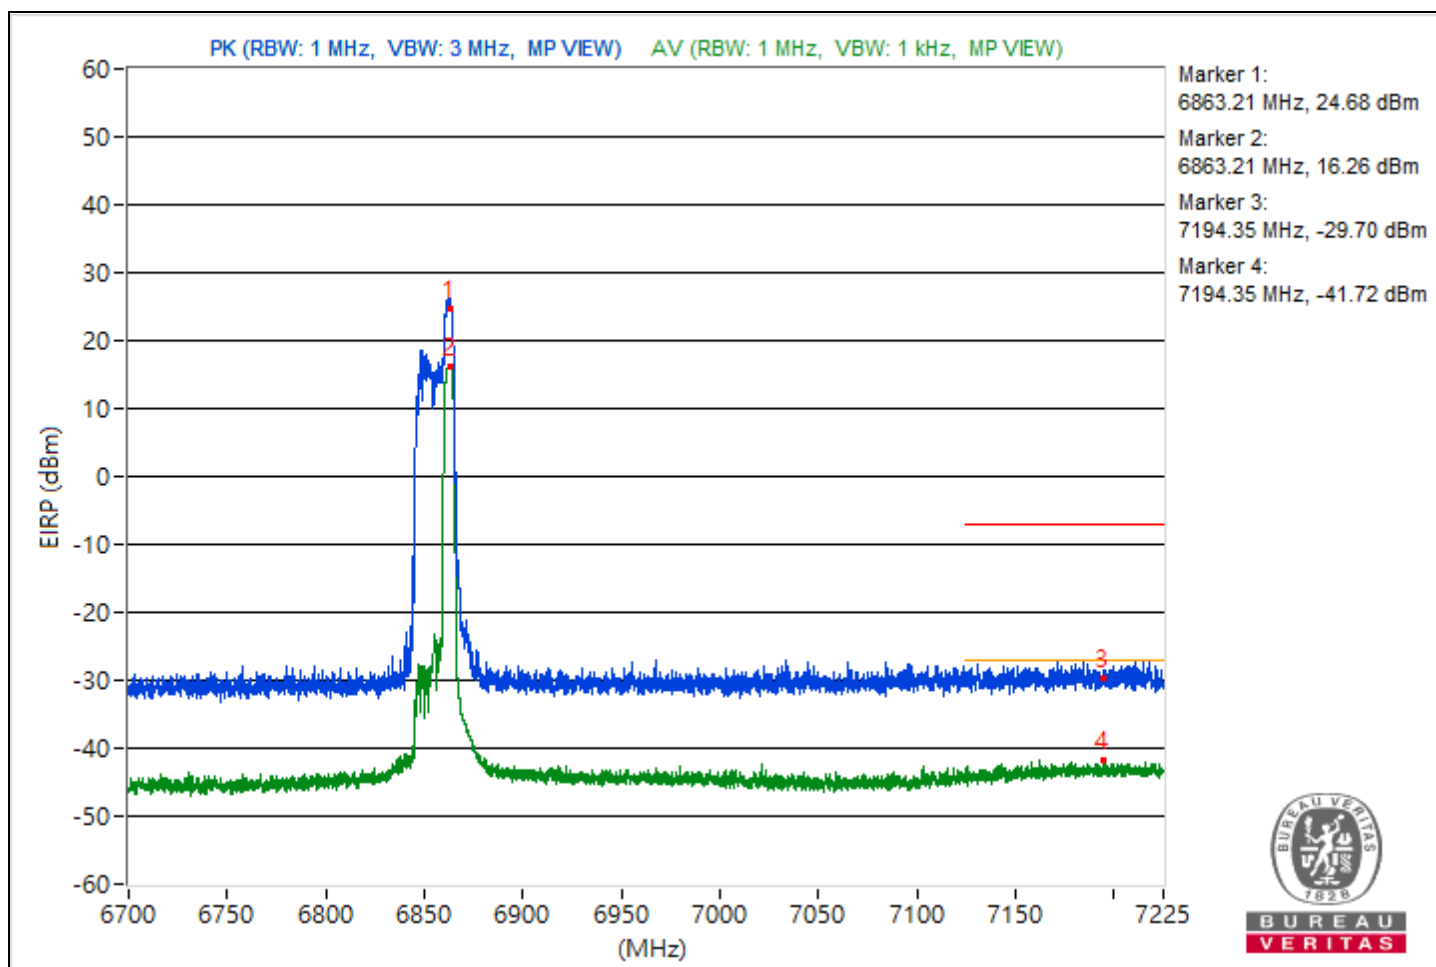


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.87	121.51 PK			17.88	8.37	26.25
2	*5948.87	111.33 AV			7.7	8.37	16.07
3	#5924.65	70.37 PK	88.26	-17.89	-33.26	8.37	-24.89
4	#5924.65	57.85 AV	68.26	-10.41	-45.78	8.37	-37.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

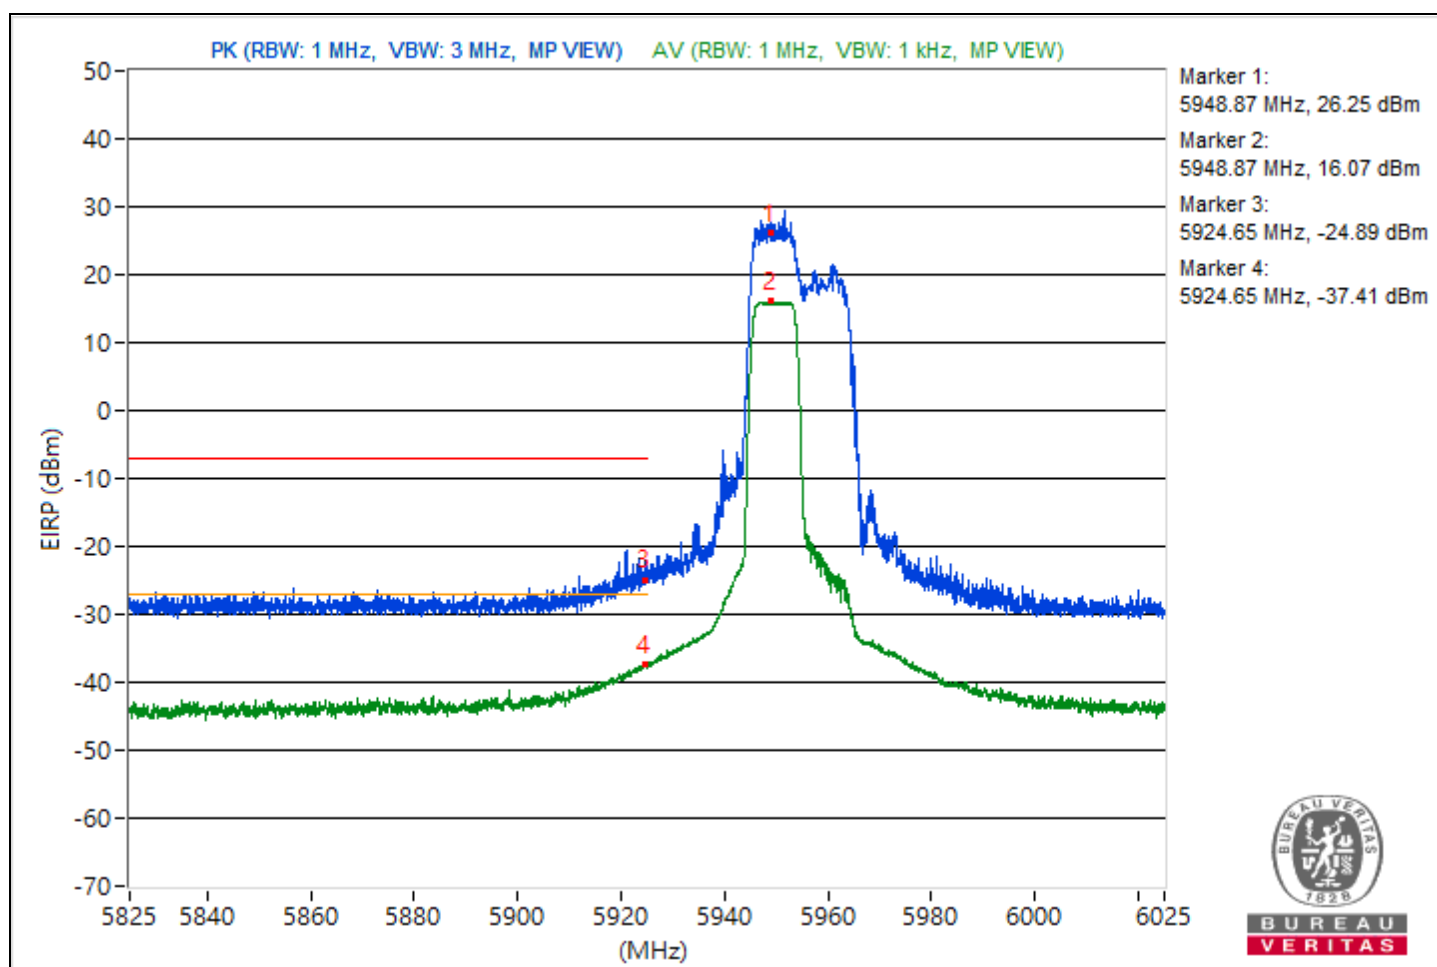


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6860.19	118.6 PK			14.97	8.37	23.34
2	*6860.19	111.39 AV			7.76	8.37	16.13
3	#7190.74	65.83 PK	88.26	-22.43	-37.8	8.37	-29.43
4	#7190.74	53.09 AV	68.26	-15.17	-50.54	8.37	-42.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

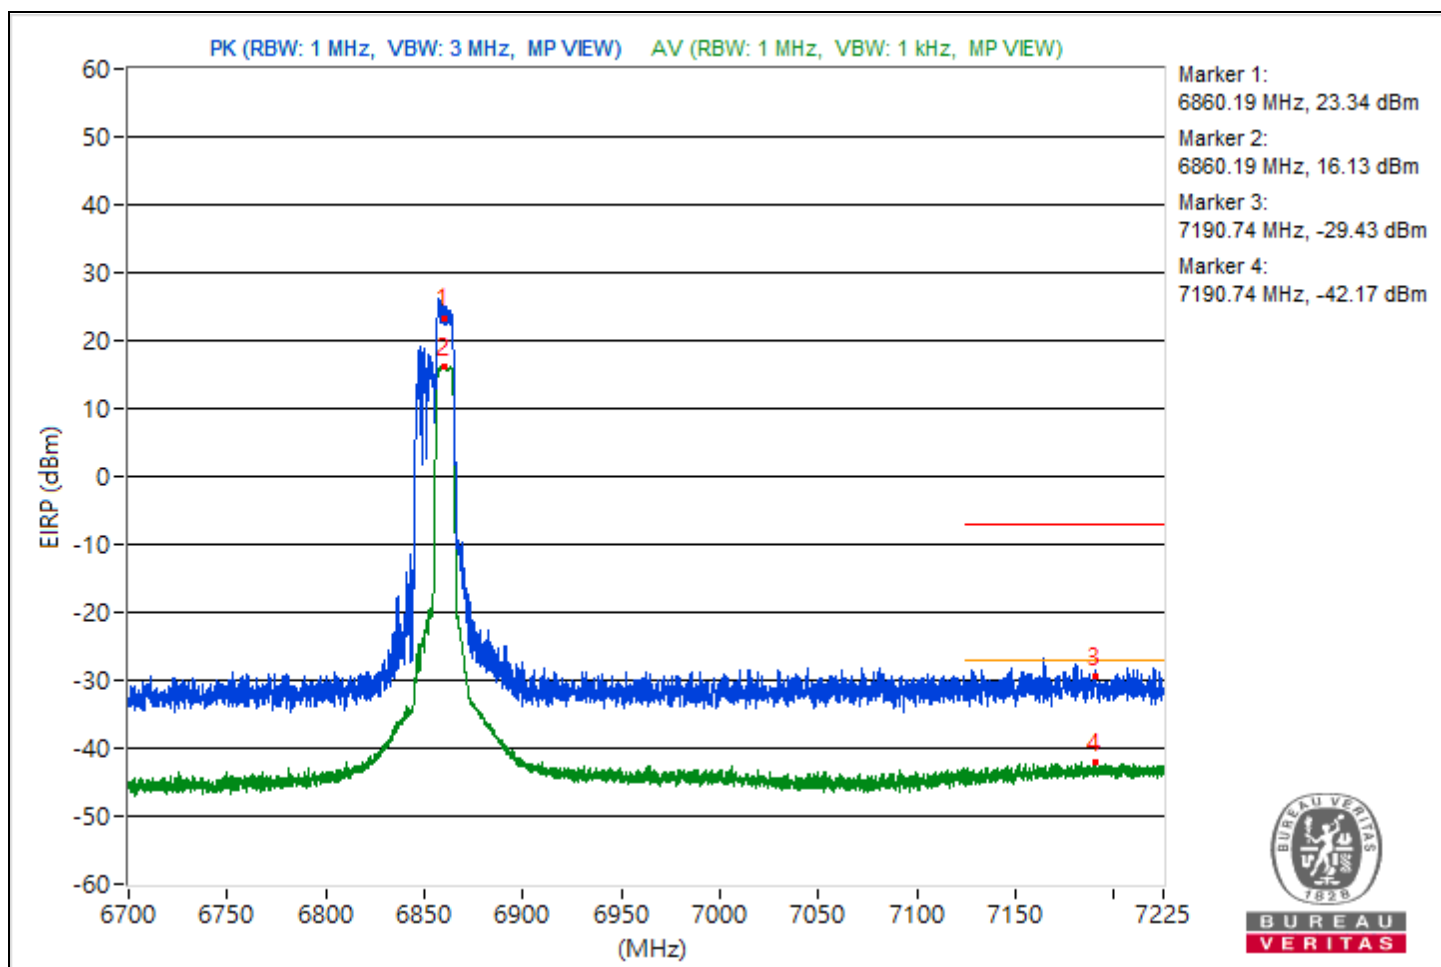


RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.12	120.1 PK			16.47	8.37	24.84
2	*5952.12	111.56 AV			7.93	8.37	16.3
3	#5922.62	67.79 PK	88.26	-20.47	-35.84	8.37	-27.47
4	#5922.62	54.96 AV	68.26	-13.3	-48.67	8.37	-40.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

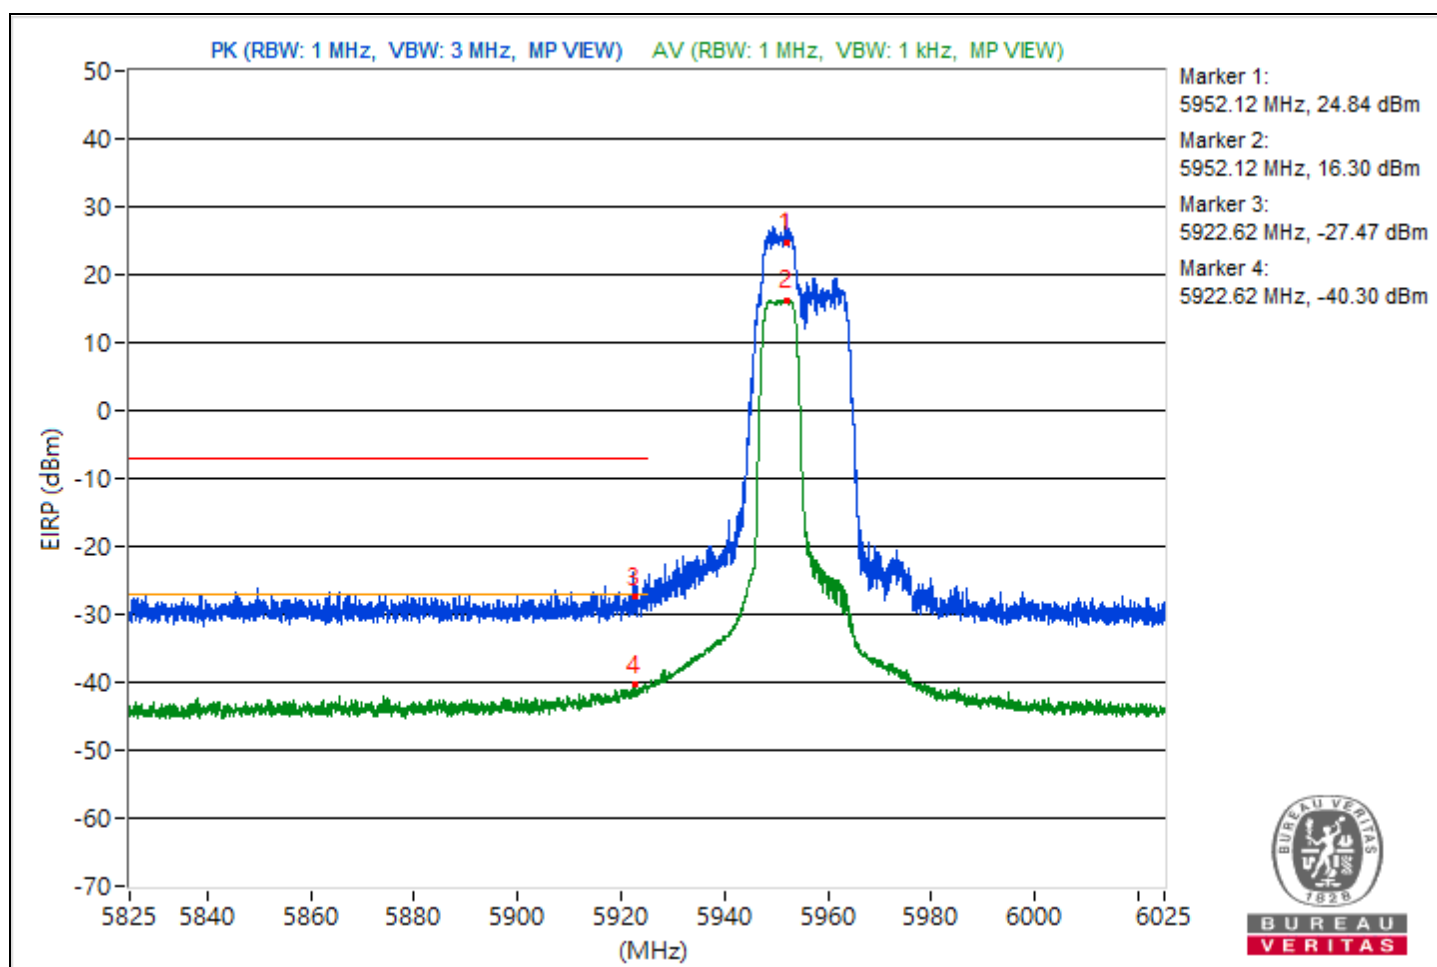

RF Mode	802.11be (EHT20) 52+26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6858.42	120.26 PK			16.63	8.37	25
2	*6858.42	111.62 AV			7.99	8.37	16.36
3	#7203.61	62.96 PK	88.26	-25.3	-40.67	8.37	-32.3
4	#7203.61	53.4 AV	68.26	-14.86	-50.23	8.37	-41.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

