




Plots of EUT Tx waveform

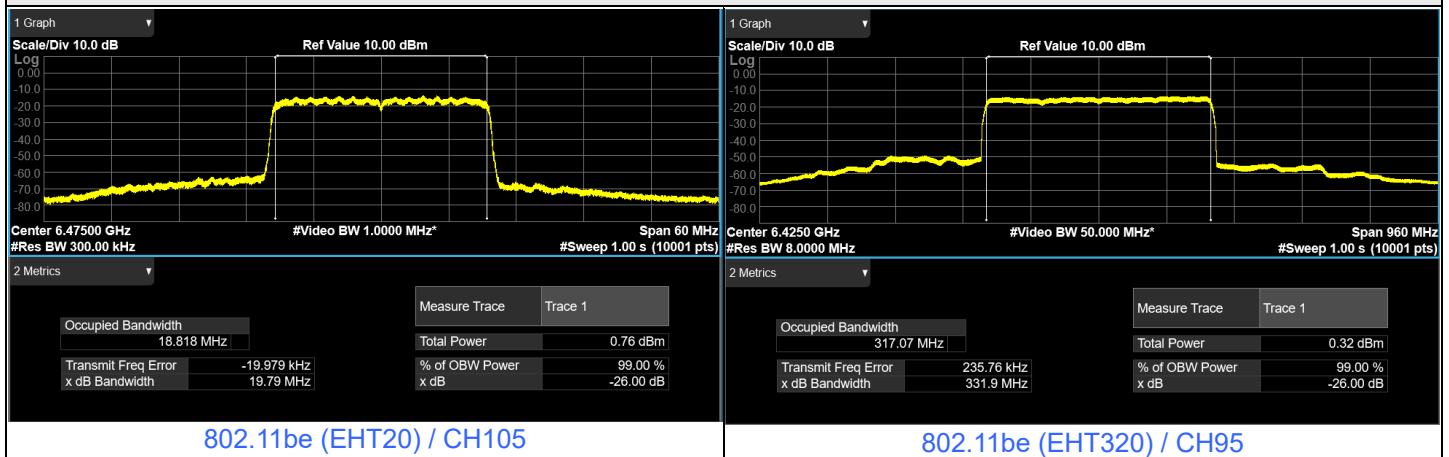

Plots of Injected signal (AWGN) level

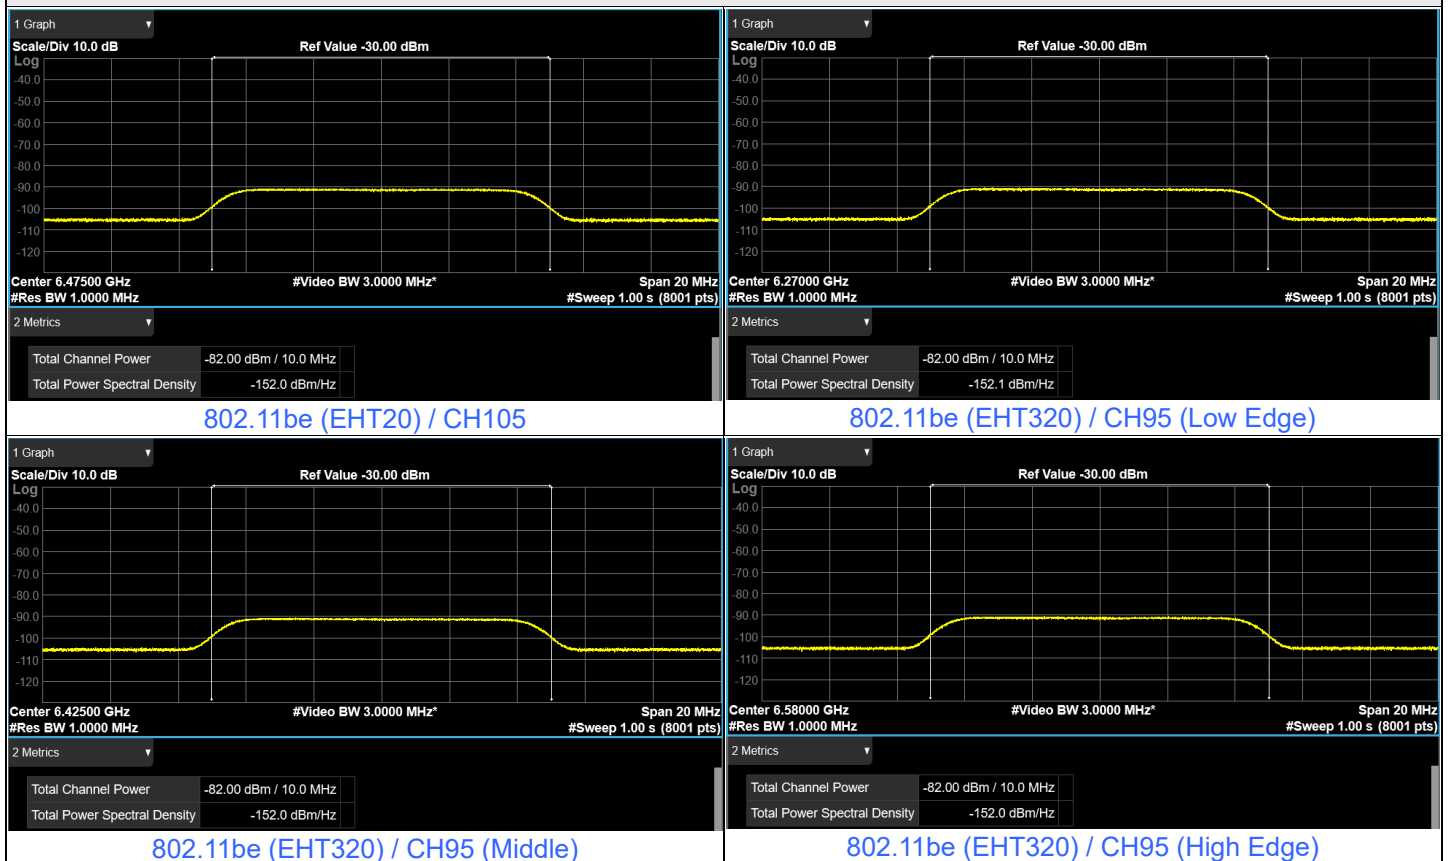

Plots of EUT ceased transmission in the time domain

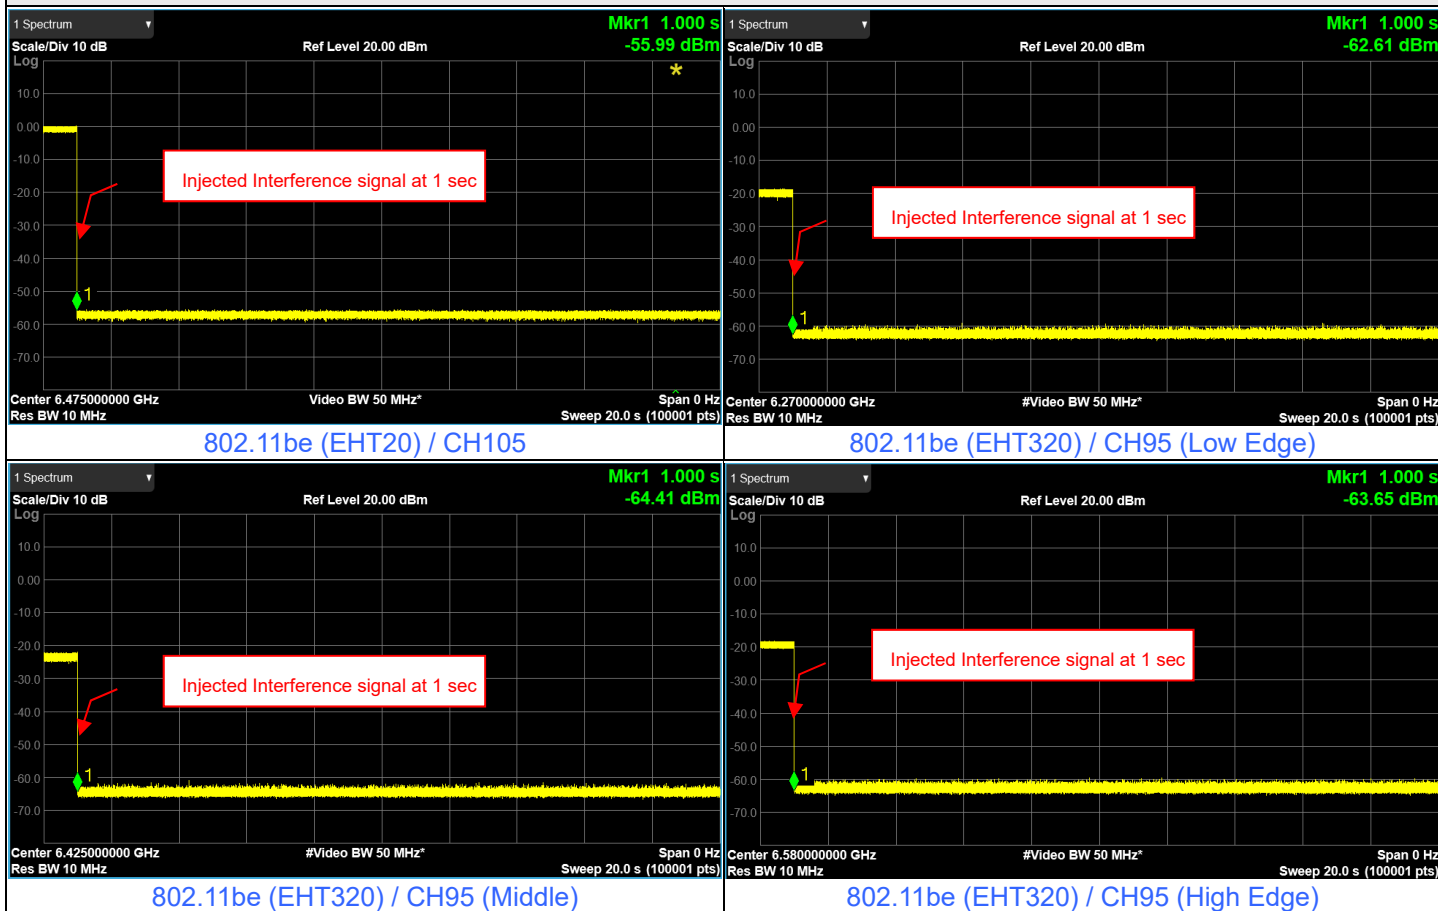

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	159	6745	6590	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6745	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6900	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:


- Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
- Antenna gain values include all the applicable path losses.
- After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6745	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

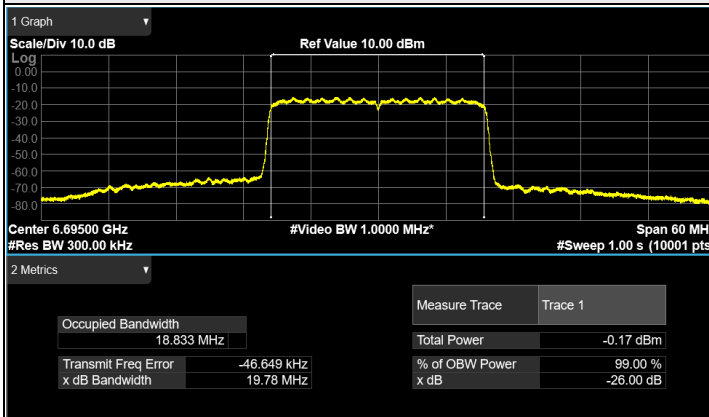


802.11be (EHT20) / CH149

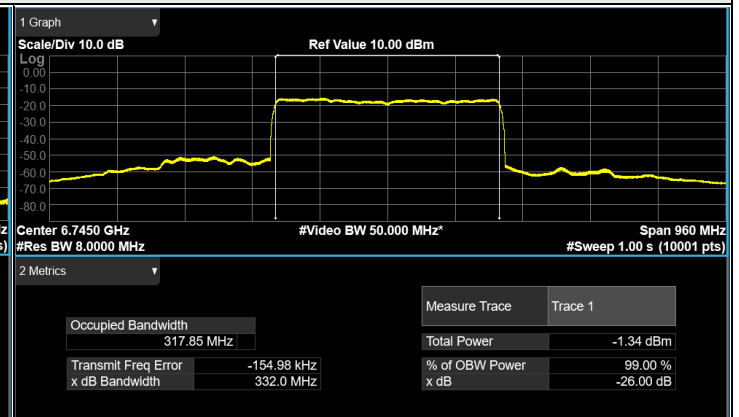


802.11be (EHT320) / CH159


Plots of Injected signal (AWGN) level

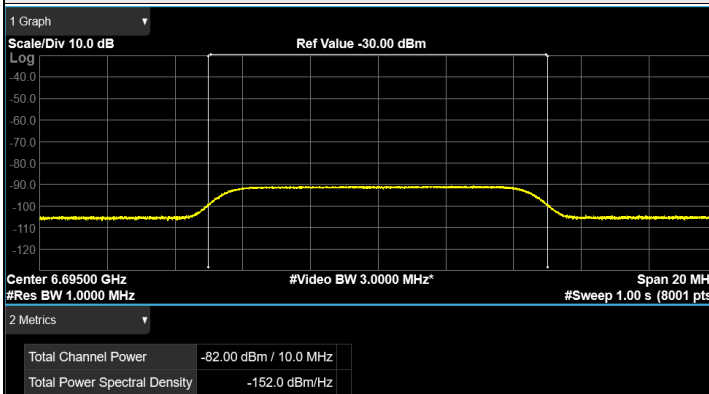


802.11be (EHT20) / CH149

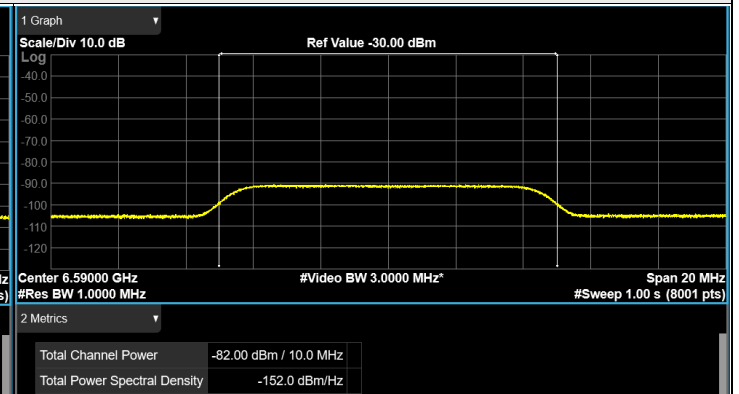

802.11be (EHT320) / CH159 (Low Edge)

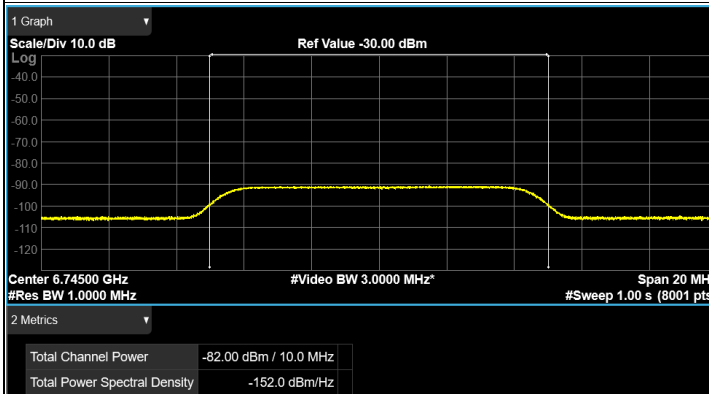


802.11be (EHT320) / CH159 (Middle)

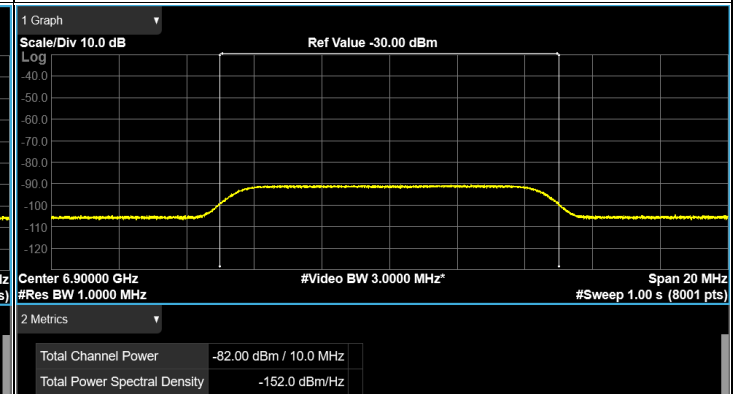

802.11be (EHT320) / CH159 (High Edge)

Plots of EUT ceased transmission in the time domain

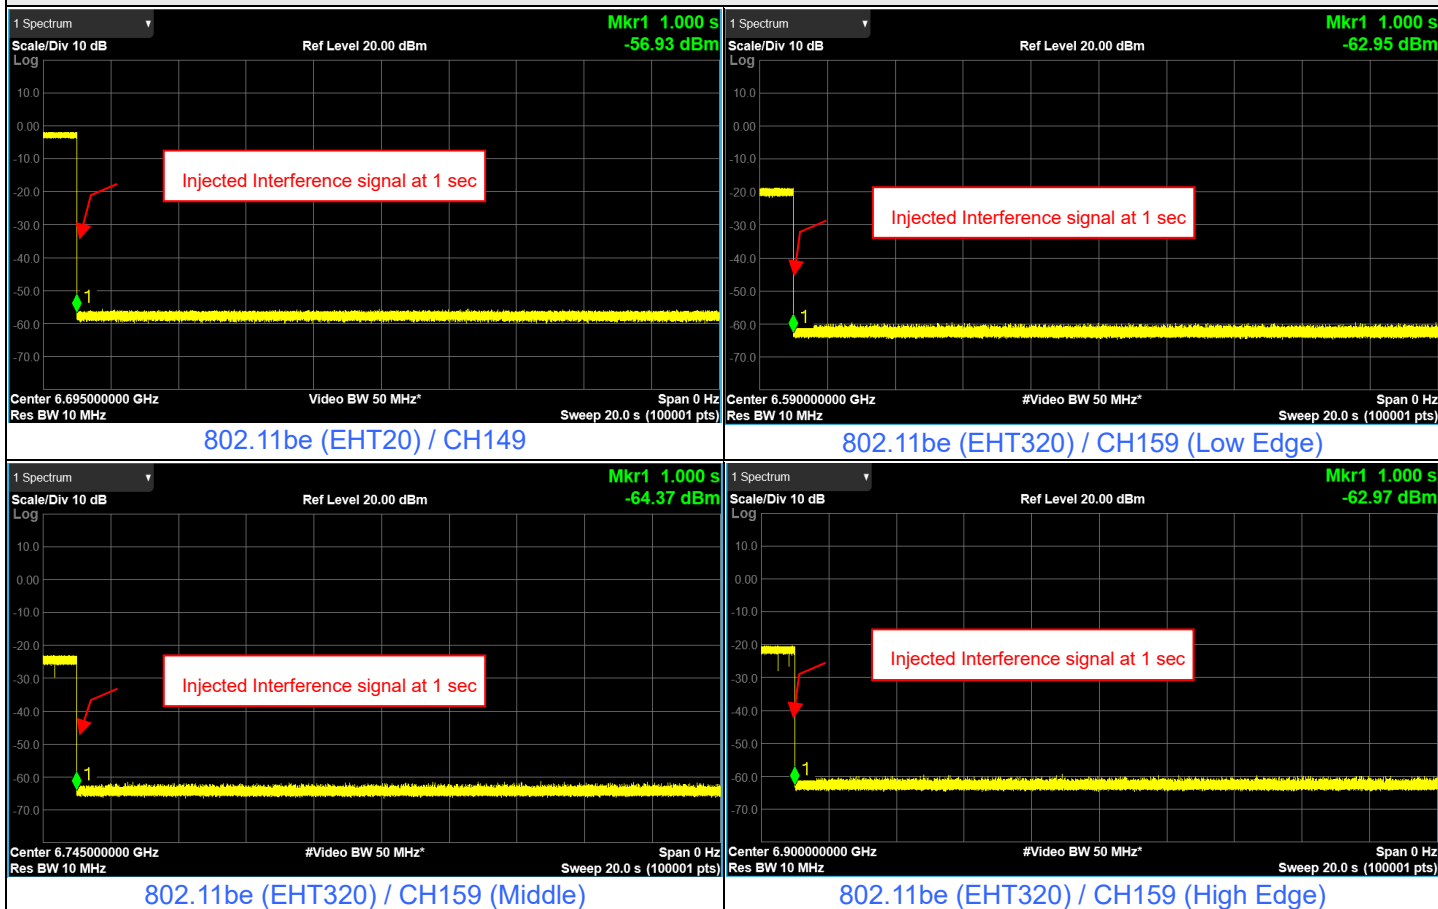

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	191	6905	6750	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6905	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				7060	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:


- Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
- Antenna gain values include all the applicable path losses.
- After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

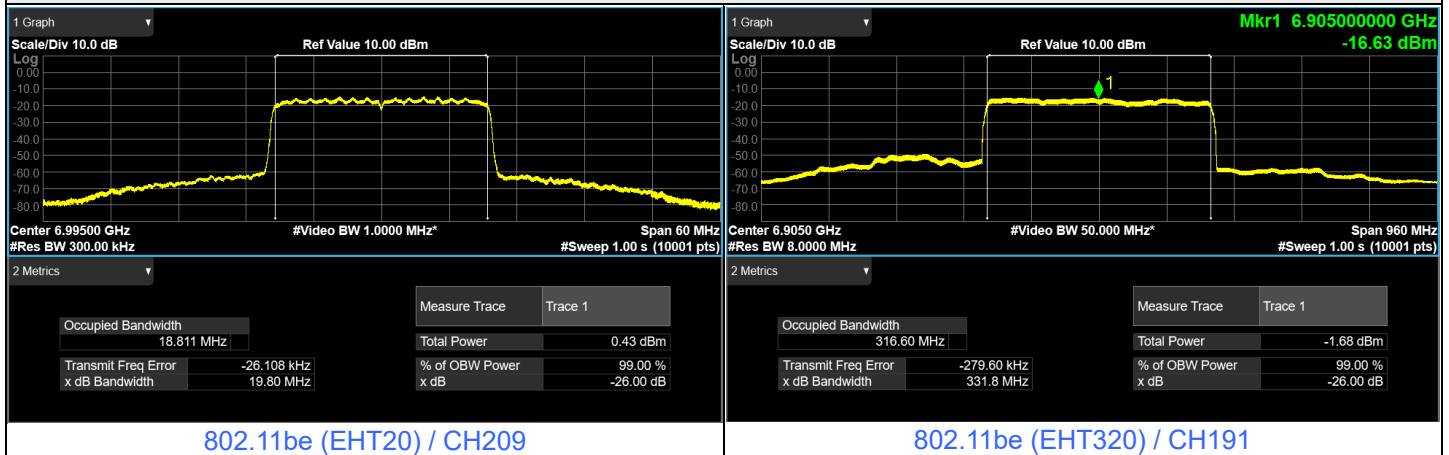

Plots of Injected signal (AWGN) level

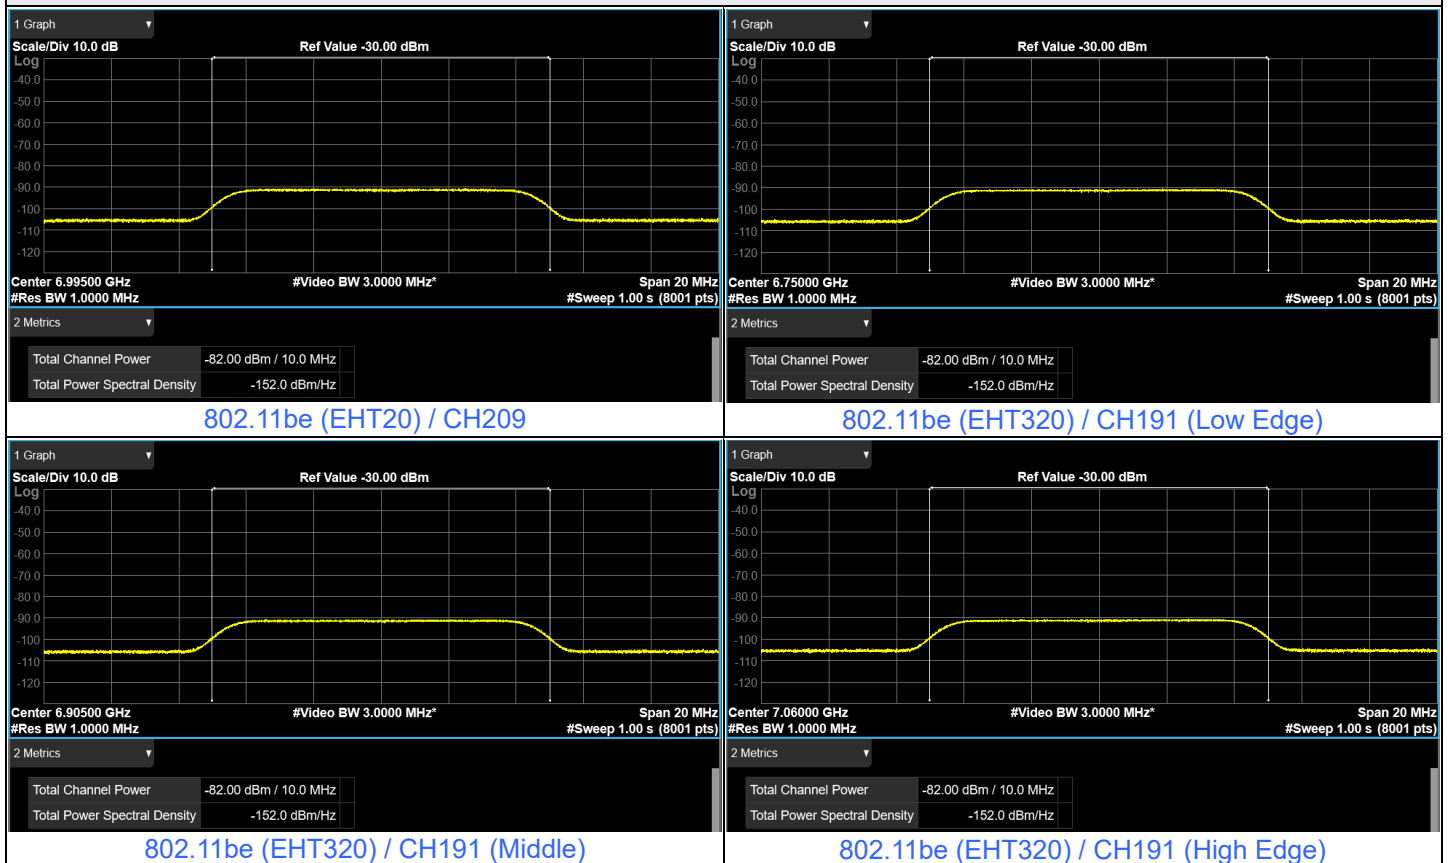

Plots of EUT ceased transmission in the time domain

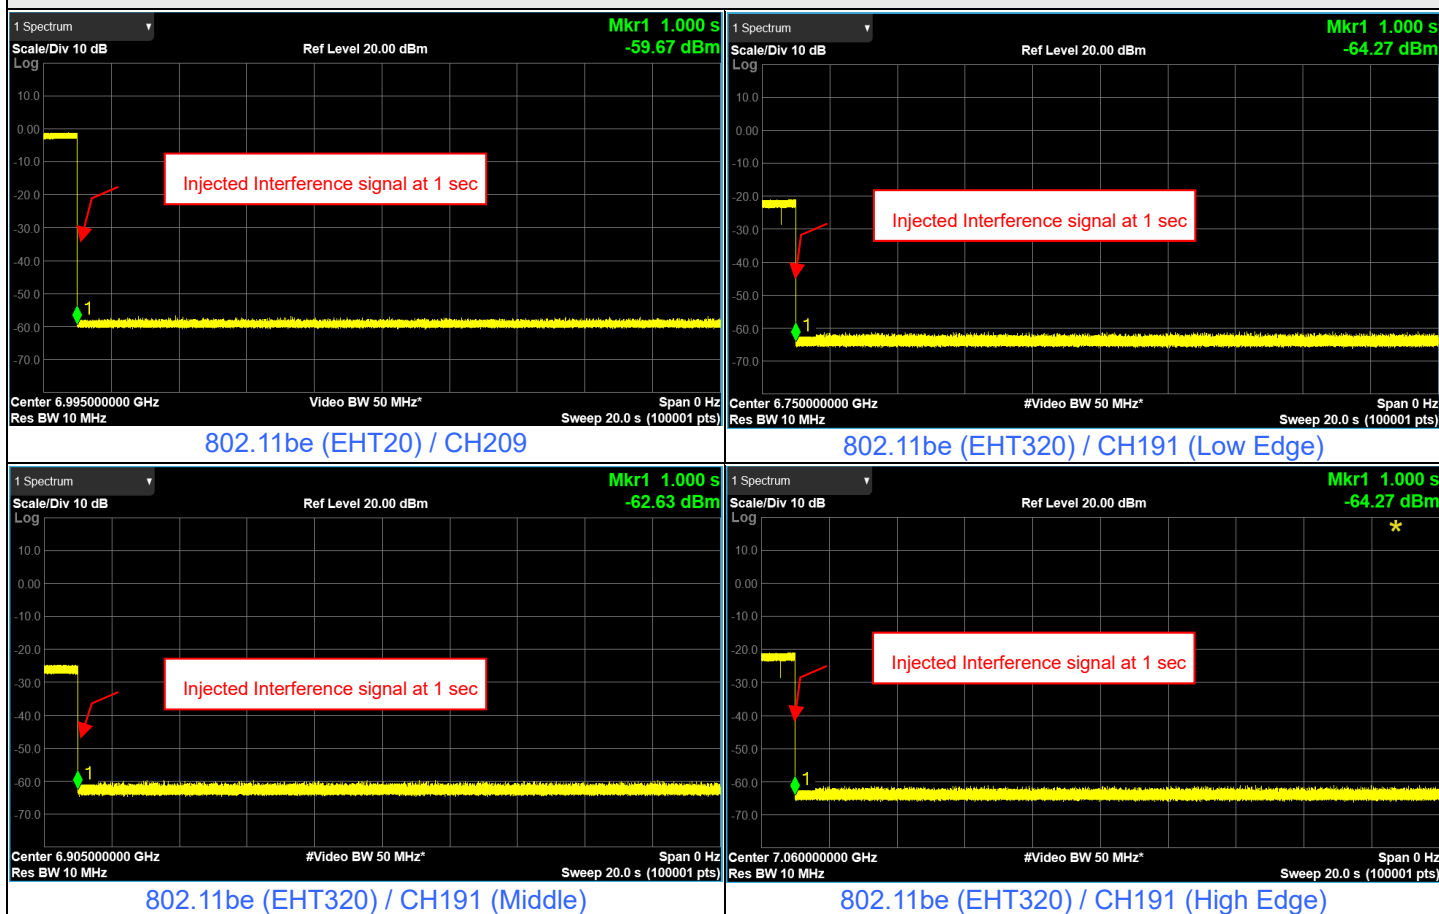

2T2S

For U-NII-5


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	45	6175	6175	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	31	6105	5950	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6105	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6260	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:


- Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
- Antenna gain values include all the applicable path losses.
- After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6175	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	5950	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6105	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6260	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

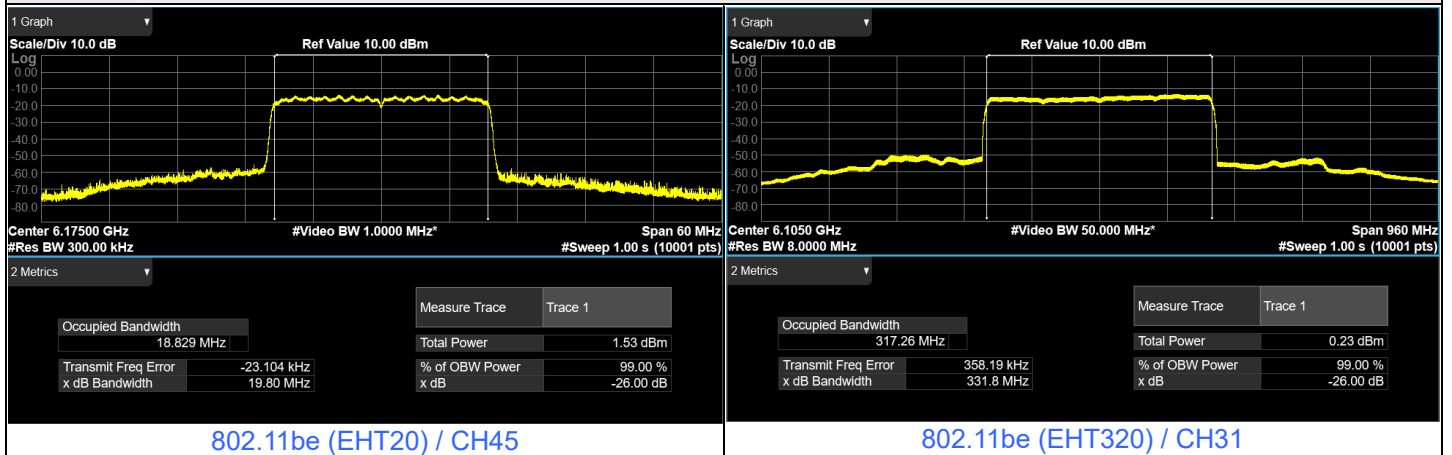

Plots of Injected signal (AWGN) level

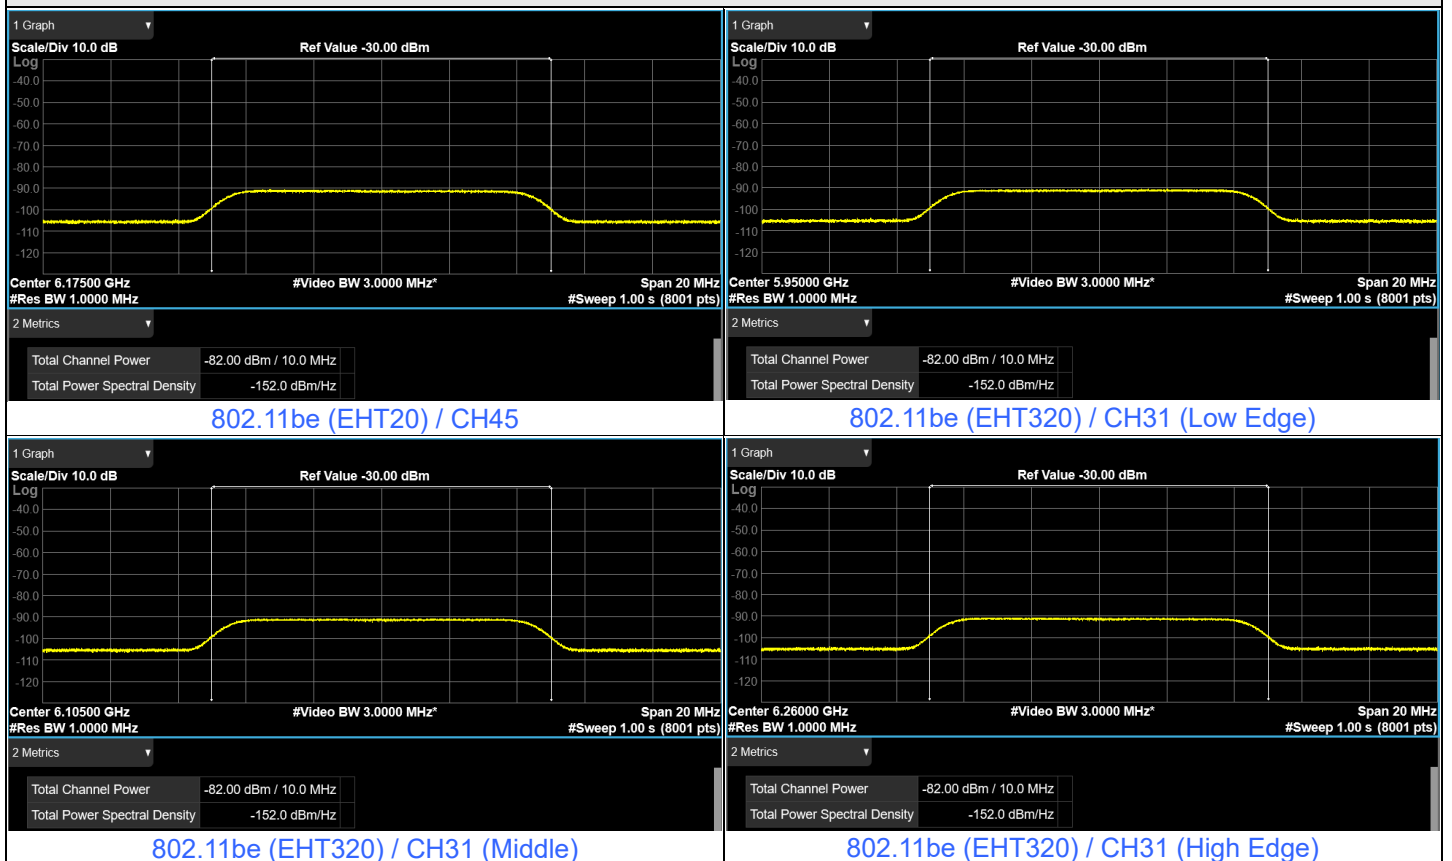

Plots of EUT ceased transmission in the time domain

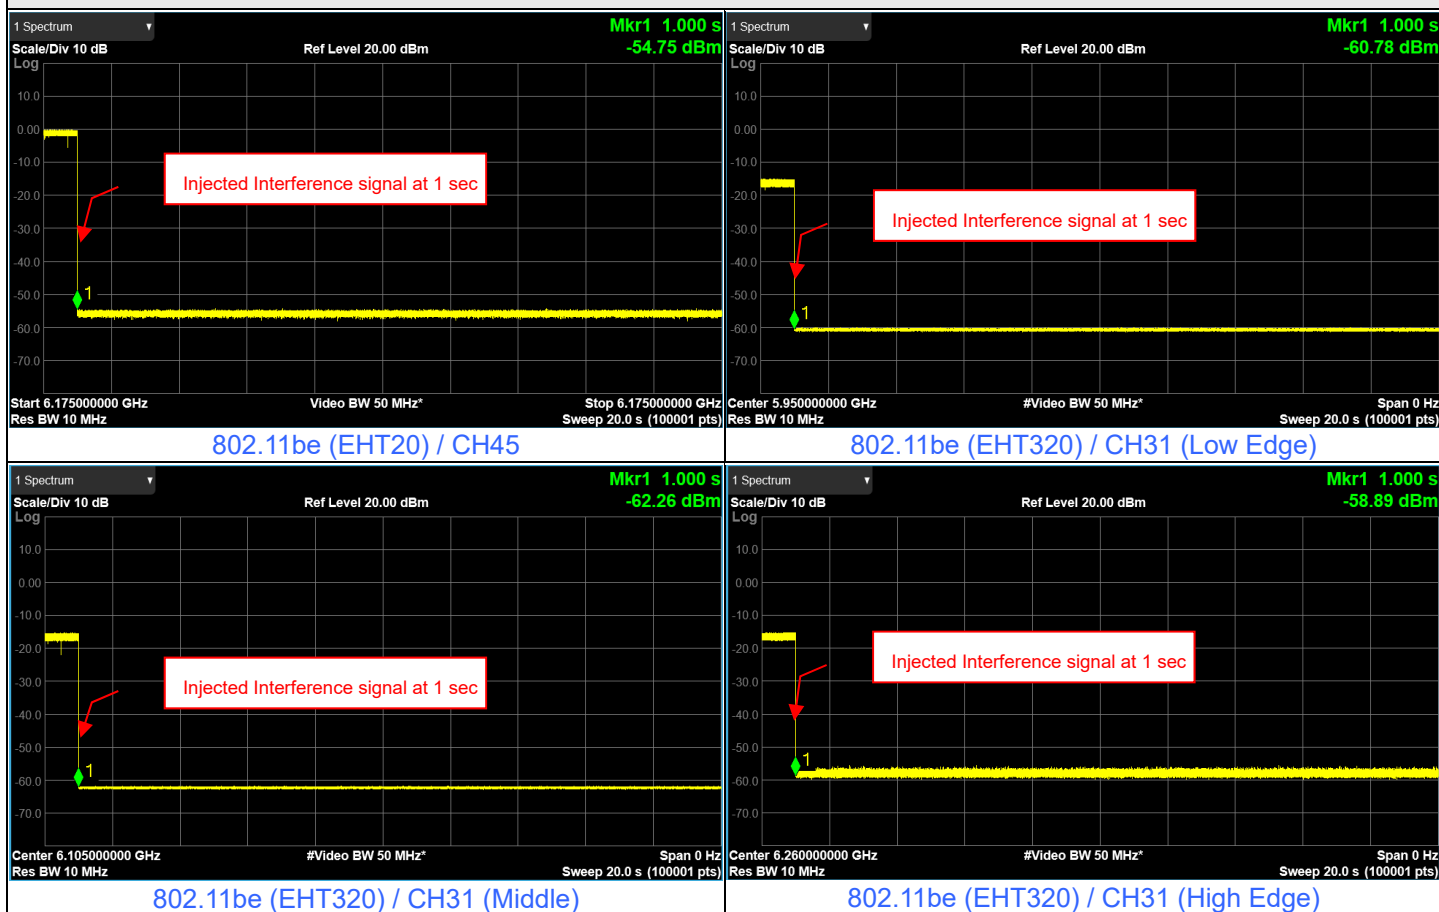

For U-NII-6


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	105	6475	6475	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	95	6425	6270	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6425	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6580	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:


- Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
- Antenna gain values include all the applicable path losses.
- After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6475	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6270	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6425	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

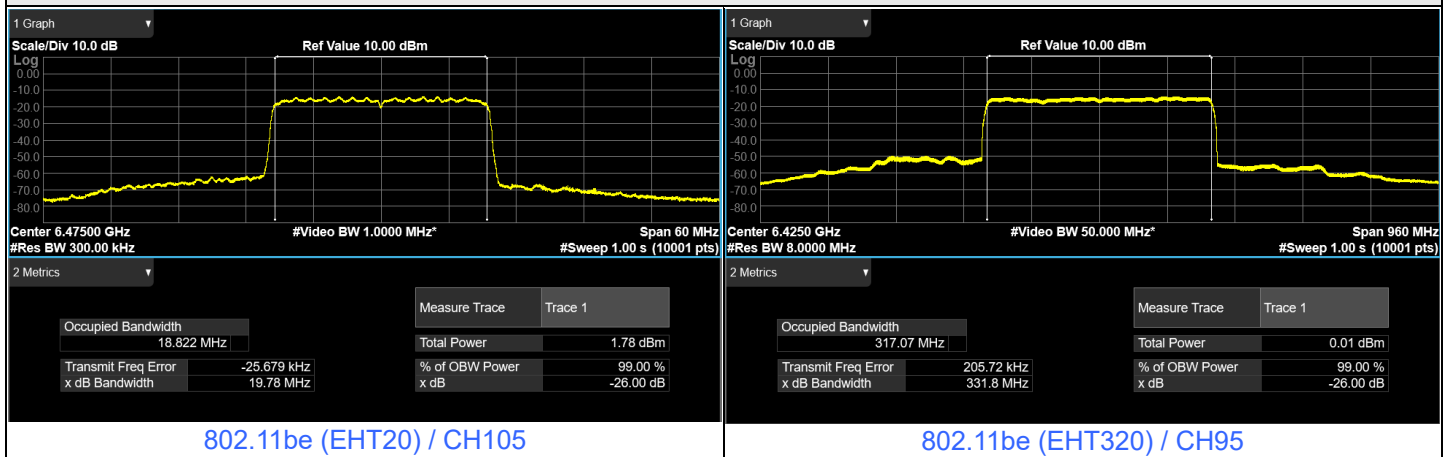

Plots of Injected signal (AWGN) level

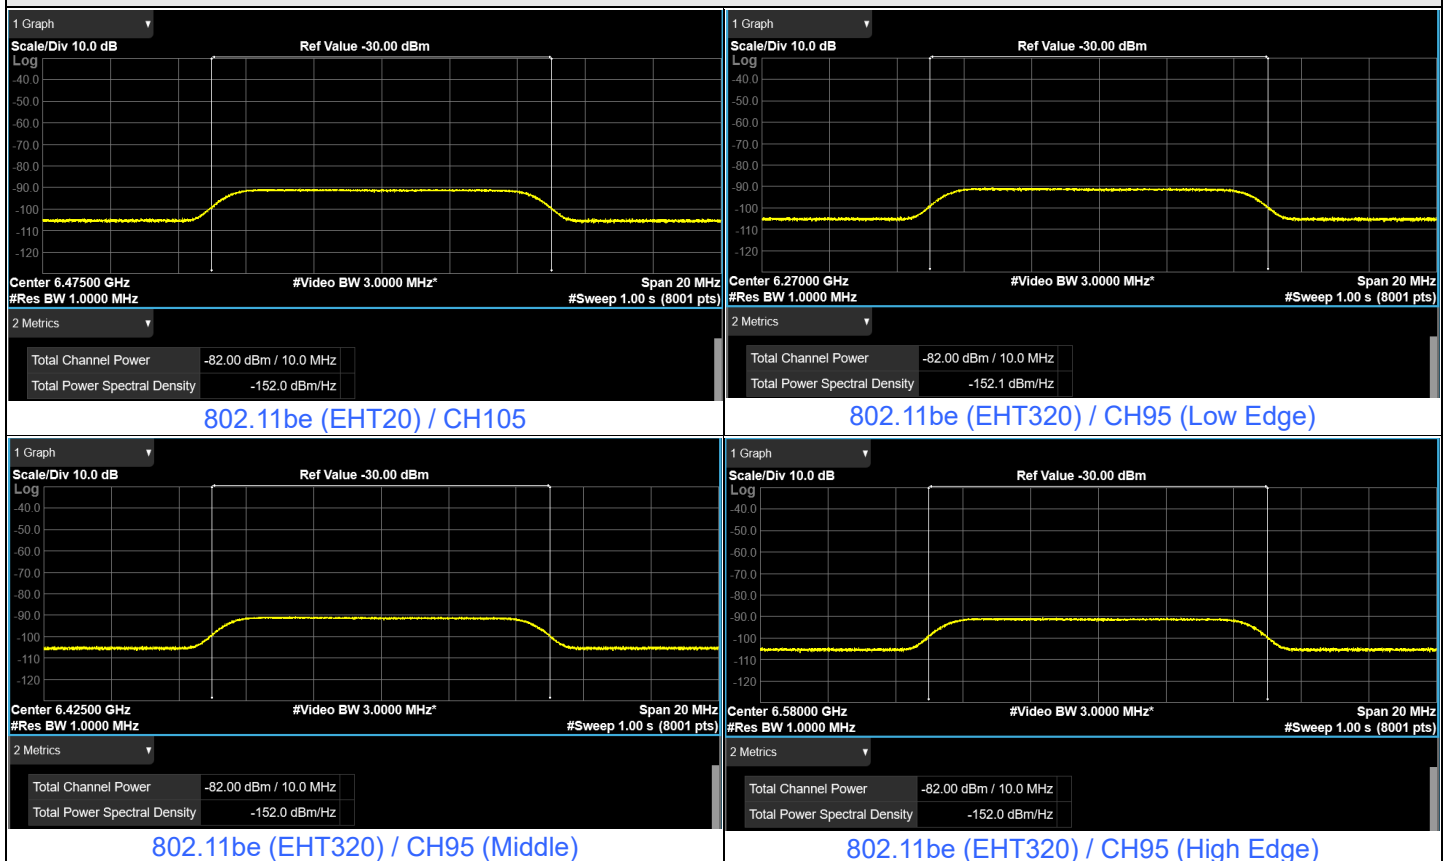

Plots of EUT ceased transmission in the time domain

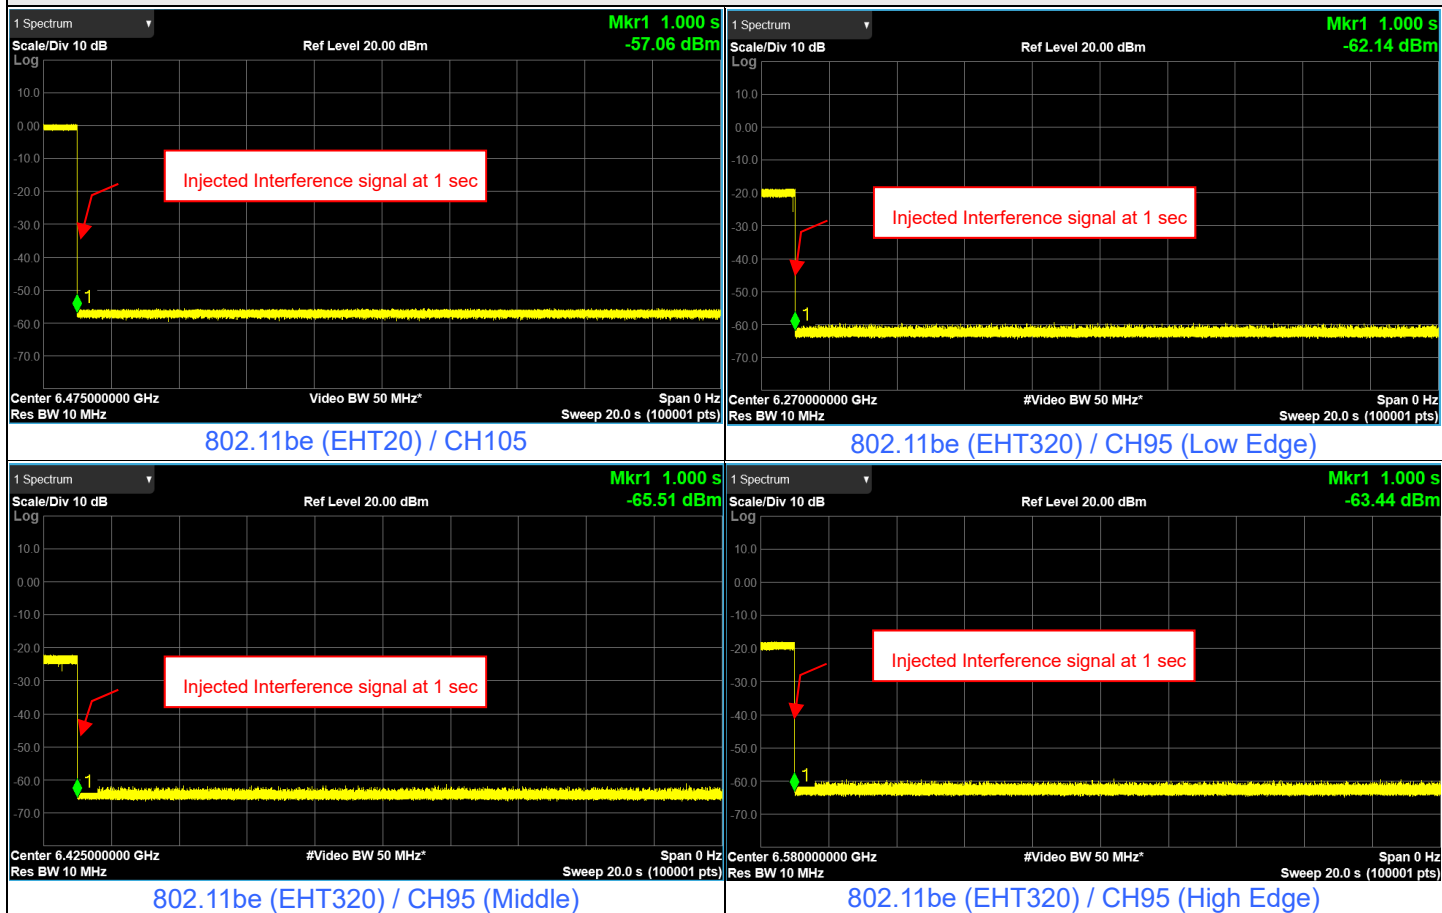

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	159	6745	6590	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6745	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6900	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:


- Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
- Antenna gain values include all the applicable path losses.
- After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6745	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

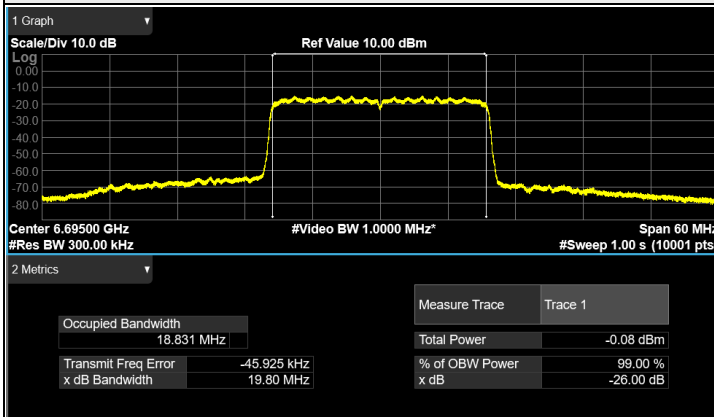


802.11be (EHT20) / CH149

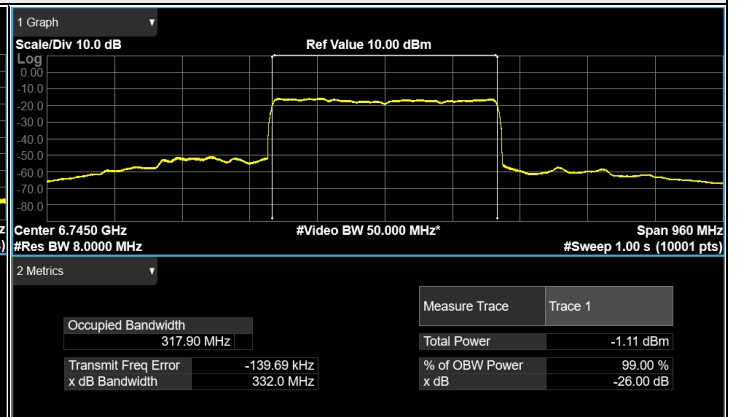


802.11be (EHT320) / CH159


Plots of Injected signal (AWGN) level

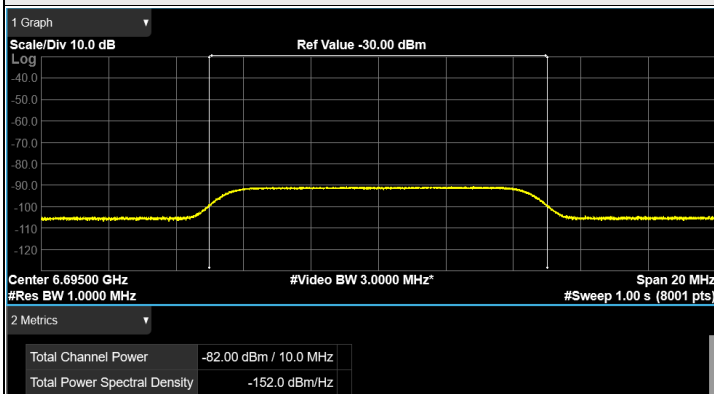


802.11be (EHT20) / CH149

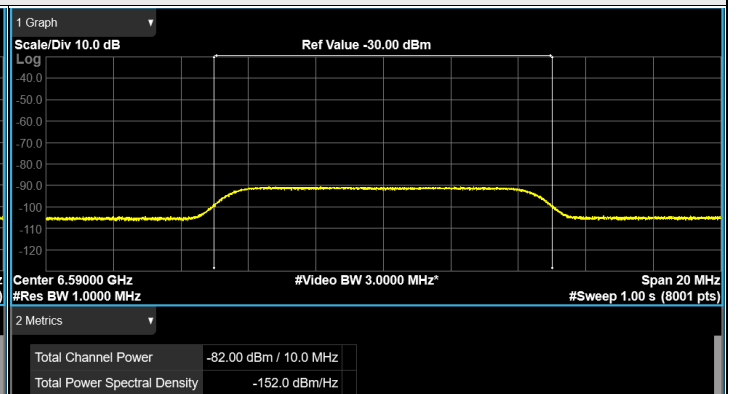

802.11be (EHT320) / CH159 (Low Edge)

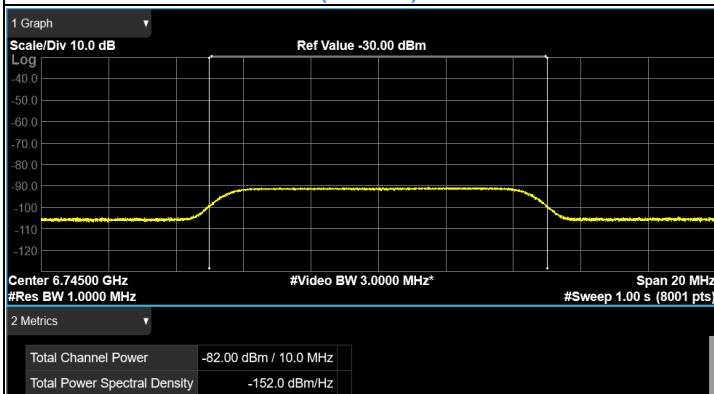


802.11be (EHT320) / CH159 (Middle)

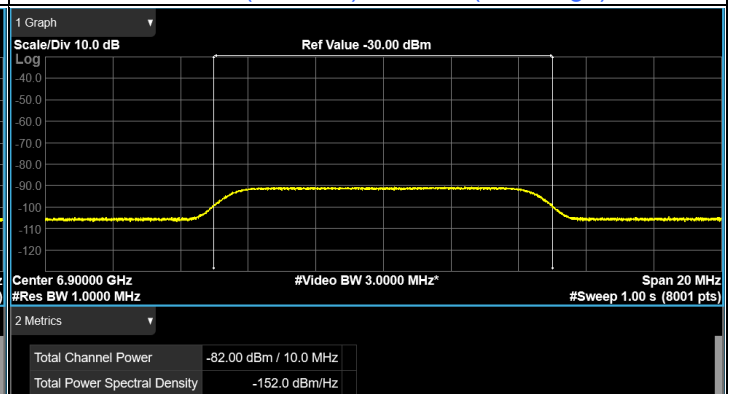

802.11be (EHT320) / CH159 (High Edge)

Plots of EUT ceased transmission in the time domain

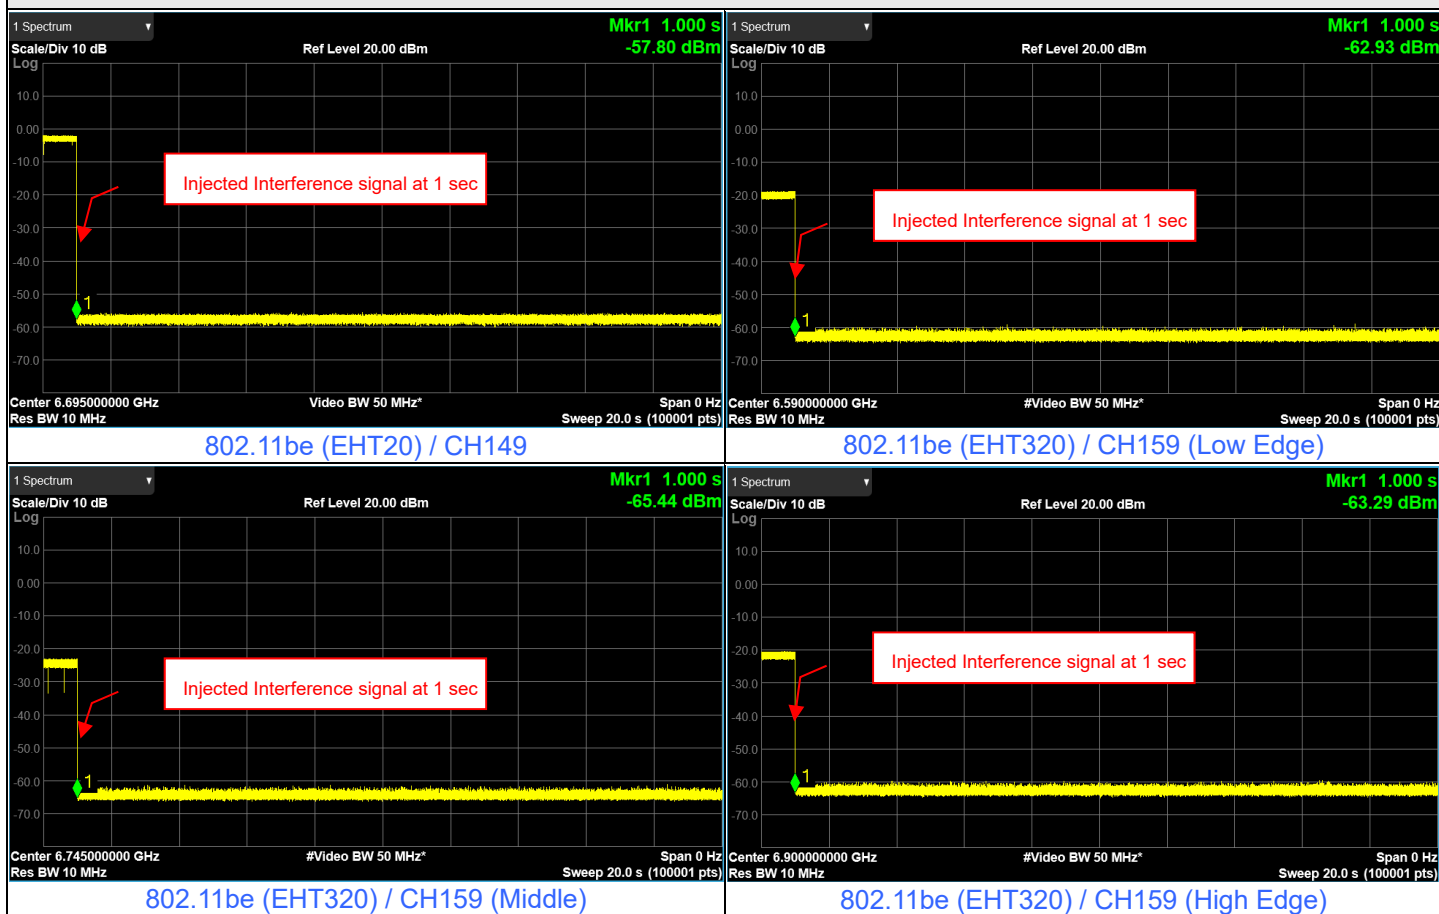

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	191	6905	6750	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6905	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				7060	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:


- Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
- Antenna gain values include all the applicable path losses.
- After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

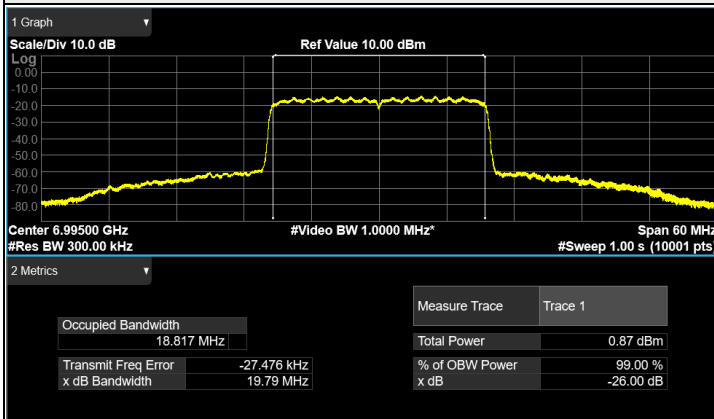


802.11be (EHT20) / CH209

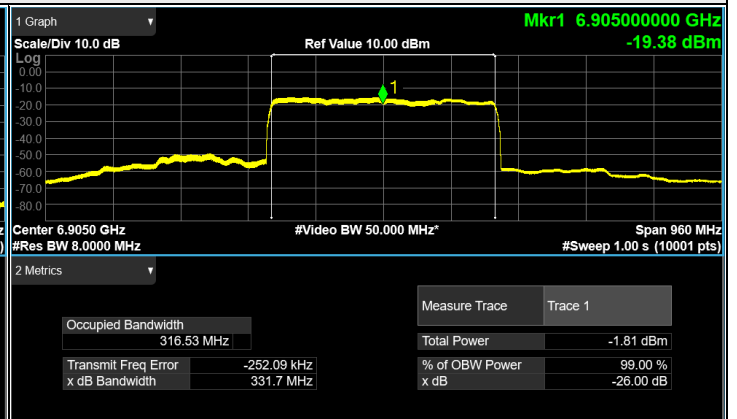


802.11be (EHT320) / CH191


Plots of Injected signal (AWGN) level

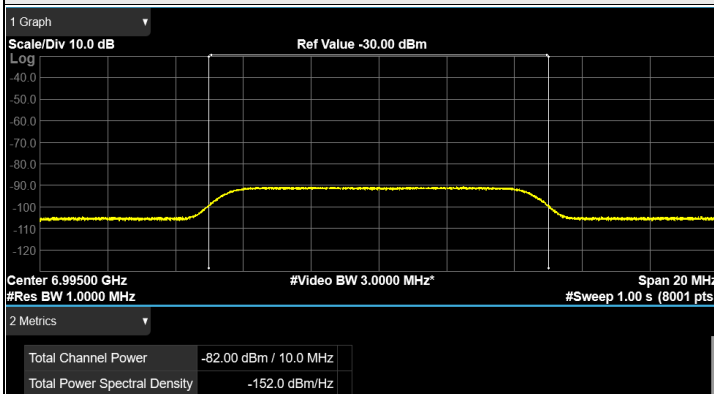


802.11be (EHT20) / CH209

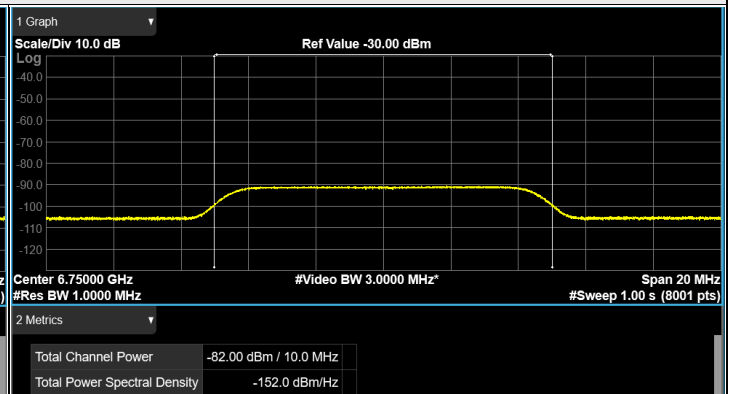

802.11be (EHT320) / CH191 (Low Edge)

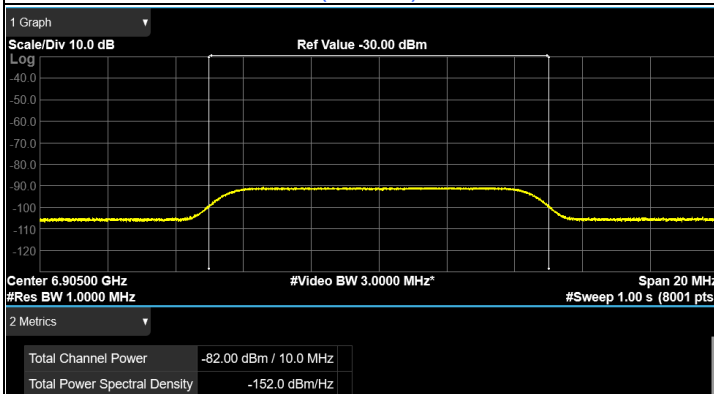


802.11be (EHT320) / CH191 (Middle)

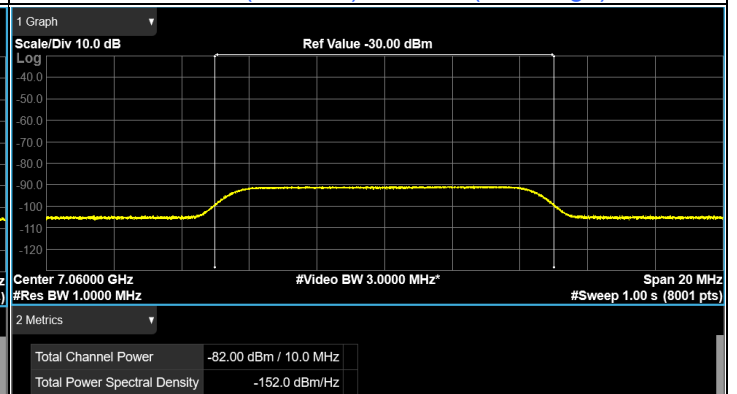


802.11be (EHT320) / CH191 (High Edge)

Plots of EUT ceased transmission in the time domain

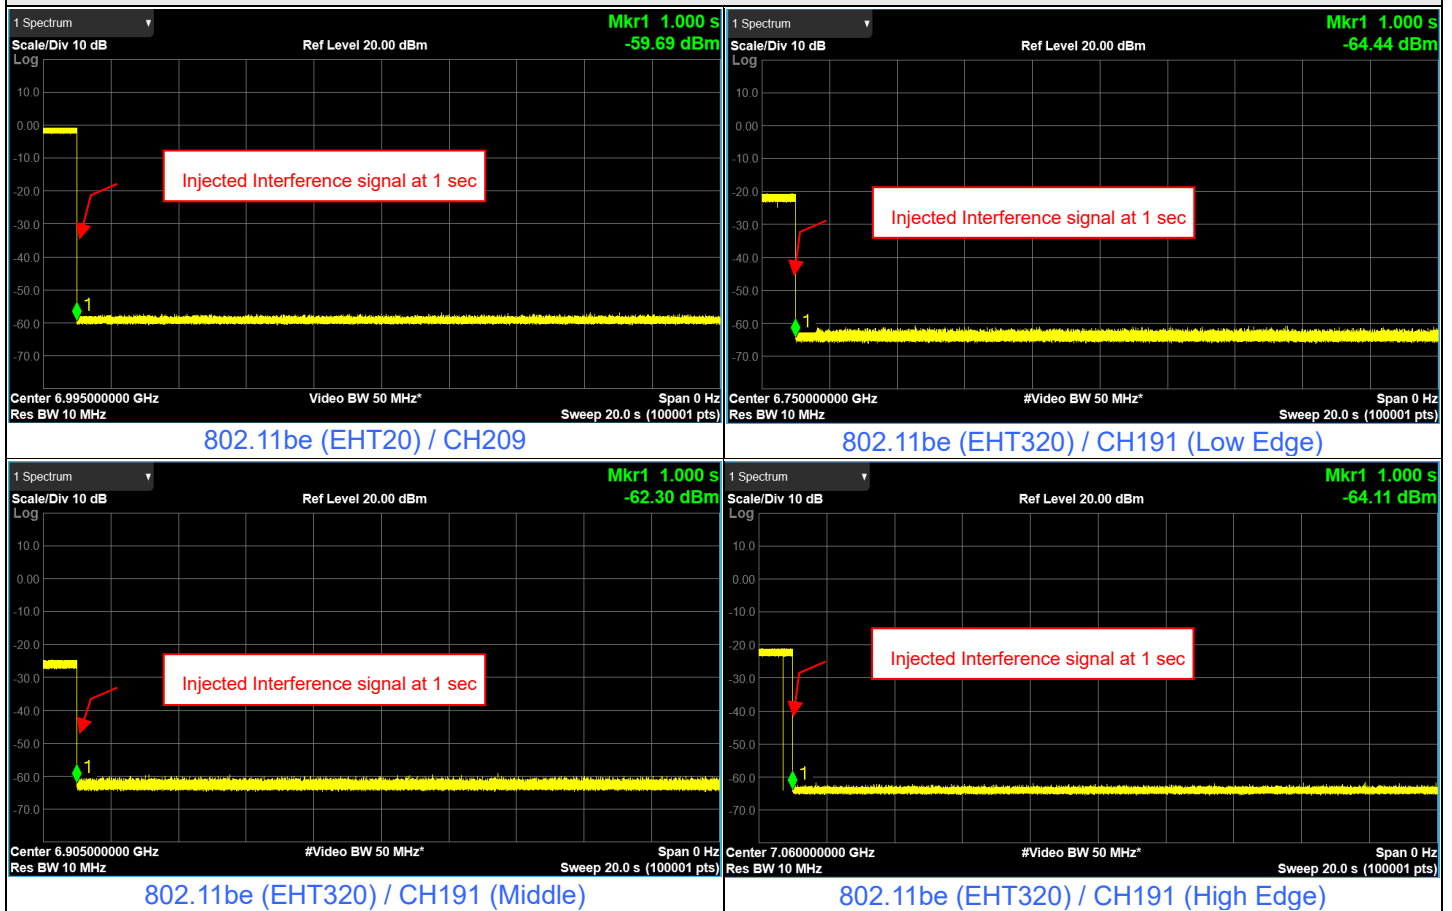

Verify Channel Puncturing

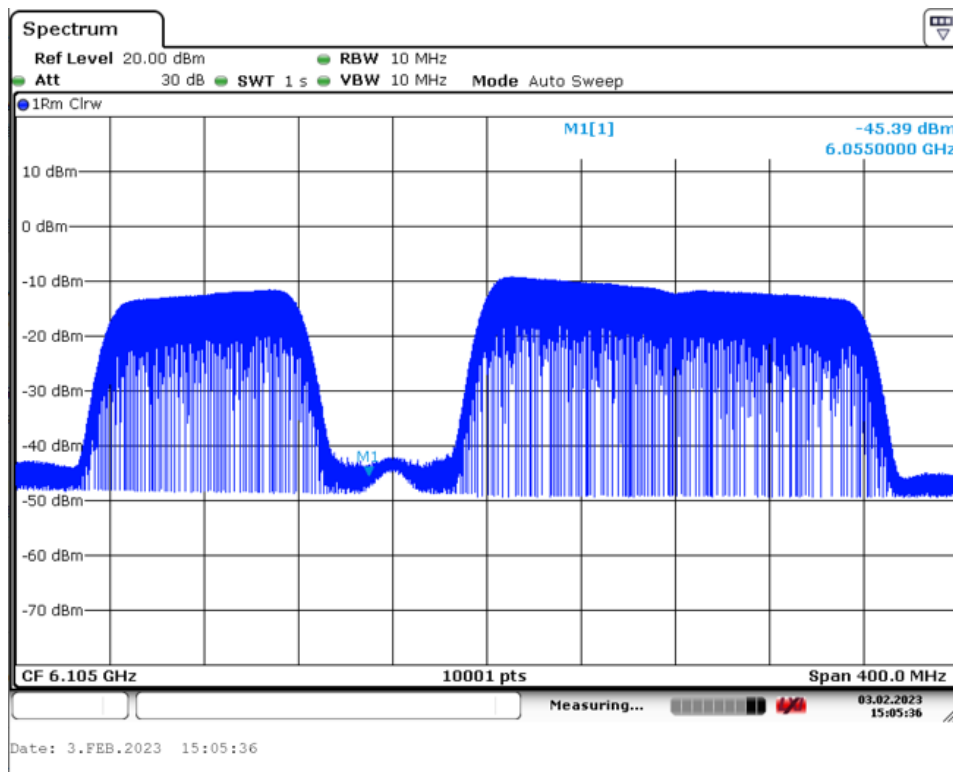

7.7 AC Power Conducted Emissions


1T1S

RF Mode	802.11be (EHT) 2x996+484-tone MRU	Channel	CH 63 : 6265 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 63% RH
Tested By	Tom Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15538	9.96	39.76	20.23	49.72	30.19	65.71	55.71	-15.99	-25.52
2	0.22494	9.96	39.15	22.76	49.11	32.72	62.63	52.63	-13.52	-19.91
3	0.42143	9.97	16.56	2.79	26.53	12.76	57.42	47.42	-30.89	-34.66
4	3.49072	10.12	21.83	15.32	31.95	25.44	56.00	46.00	-24.05	-20.56
5	15.31529	10.82	15.73	5.46	26.55	16.28	60.00	50.00	-33.45	-33.72
6	23.61055	11.16	29.63	27.57	40.79	38.73	60.00	50.00	-19.21	-11.27

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

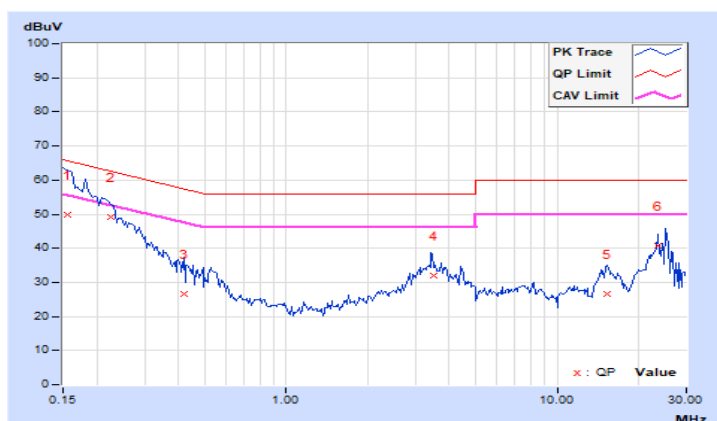


RF Mode	802.11be (EHT) 2x996+484-tone MRU	Channel	CH 63 : 6265 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 68% RH
Tested By	Tom Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15199	9.93	49.61	27.07	59.54	37.00	65.89	55.89	-6.35	-18.89
2	0.20195	9.94	41.82	20.43	51.76	30.37	63.53	53.53	-11.77	-23.16
3	0.46792	9.94	17.37	1.59	27.31	11.53	56.55	46.55	-29.24	-35.02
4	3.46299	10.08	22.53	15.54	32.61	25.62	56.00	46.00	-23.39	-20.38
5	14.92896	10.60	17.37	8.11	27.97	18.71	60.00	50.00	-32.03	-31.29
6	25.12353	10.86	31.47	27.96	42.33	38.82	60.00	50.00	-17.67	-11.18

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

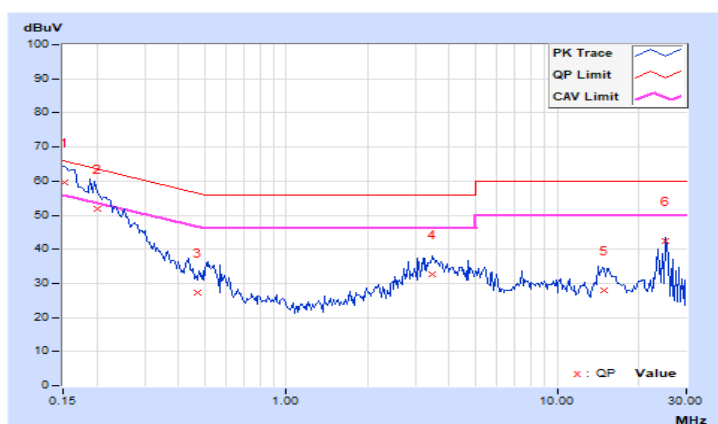


RF Mode	802.11be (EHT) 3x996+484-tone MRU	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24°C, 63% RH
Tested By	Tom Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15033	9.96	48.62	28.71	58.58	38.67	65.98	55.98	-7.40	-17.31
2	0.24092	9.96	35.45	13.37	45.41	23.33	62.06	52.06	-16.65	-28.73
3	0.53719	9.98	18.82	3.54	28.80	13.52	56.00	46.00	-27.20	-32.48
4	3.67699	10.13	22.64	14.52	32.77	24.65	56.00	46.00	-23.23	-21.35
5	15.45271	10.83	16.55	5.68	27.38	16.51	60.00	50.00	-32.62	-33.49
6	24.99015	11.18	23.26	14.58	34.44	25.76	60.00	50.00	-25.56	-24.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

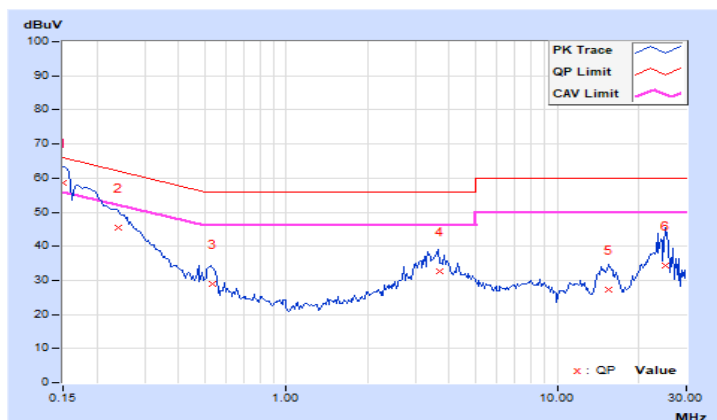


RF Mode	802.11be (EHT) 3x996+484-tone MRU	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24°C, 63% RH
Tested By	Tom Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.93	41.53	18.72	51.46	28.65	66.00	56.00	-14.54	-27.35
2	0.25762	9.94	32.51	12.93	42.45	22.87	61.51	51.51	-19.06	-28.64
3	0.53154	9.95	16.43	2.99	26.38	12.94	56.00	46.00	-29.62	-33.06
4	3.50197	10.08	21.52	15.19	31.60	25.27	56.00	46.00	-24.40	-20.73
5	14.70154	10.59	17.61	7.83	28.20	18.42	60.00	50.00	-31.80	-31.58
6	25.13411	10.86	30.79	27.43	41.65	38.29	60.00	50.00	-18.35	-11.71

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

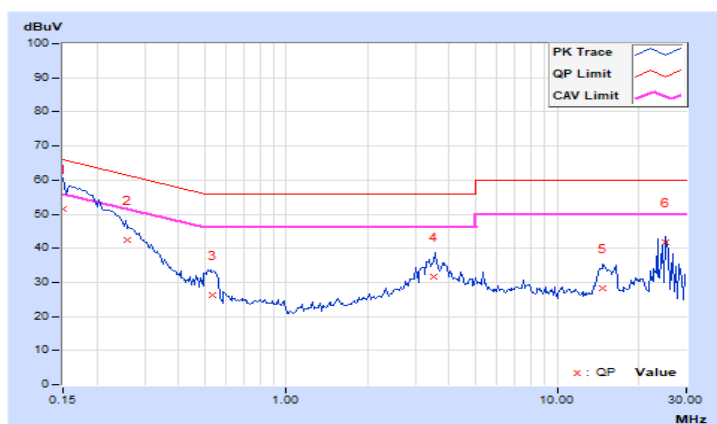

7.8 Unwanted Emissions below 1 GHz

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Emission Convert Formula

- a. $\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$
 $d = \text{measurement distance in 3 meters.}$
- b. $\text{EIRP Level (dBm)} = \text{Raw Value (dBm)} + \text{Correction Factor (dB)}$
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal
 For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.
 For the band edge the gain for the specific band may have been used.

Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:
 For $f = 30 - 1000 \text{ MHz}$, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.

1T1S

Mode A


320 MHz Preamble 802.11be (RU996*2+484) - Channel 63

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	30.36	24.82	40	-15.18	-75.2	4.76	-70.44
2	150.4	23.42	43.5	-20.08	-76.6	4.76	-71.84
3	231.03	22.61	46	-23.39	-77.41	4.76	-72.65
4	531	23.55	46	-22.45	-76.47	4.76	-71.71
5	752.77	23.72	46	-22.28	-76.3	4.76	-71.54
6	895.48	24.37	46	-21.63	-75.65	4.76	-70.89

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

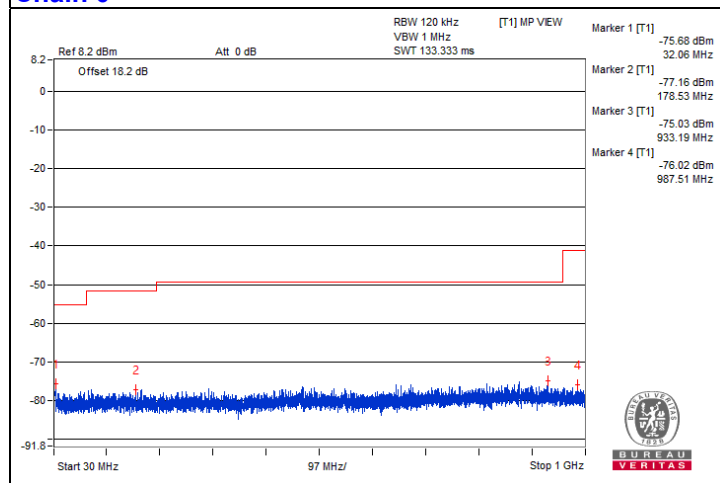


Mode B

RF Mode	802.11be (EHT) 2x996+484-tone MRU	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.04	22.6 QP	40.0	-17.4	1.00 H	253	35.1	-12.5
2	198.71	39.3 QP	43.5	-4.2	1.00 H	154	54.3	-15.0
3	299.17	42.3 QP	46.0	-3.7	1.50 H	319	53.1	-10.8
4	398.53	33.1 QP	46.0	-12.9	1.50 H	199	41.0	-7.9
5	698.14	40.0 QP	46.0	-6.0	2.00 H	134	40.7	-0.7
6	897.89	43.0 QP	46.0	-3.0	1.50 H	98	39.8	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

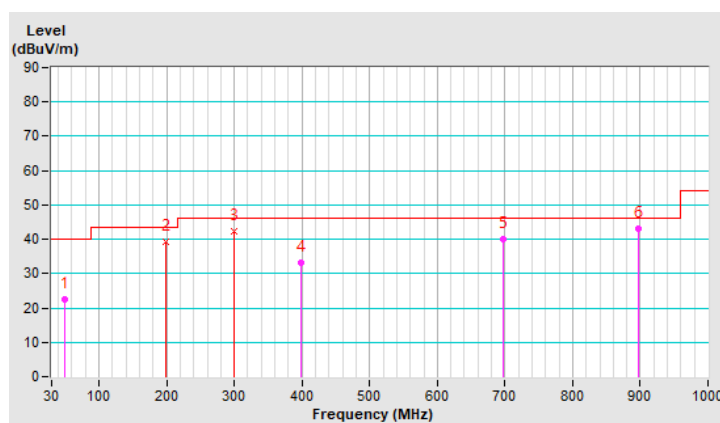


RF Mode	802.11be (EHT) 2x996+484-tone MRU	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	199.97	34.7 QP	43.5	-8.8	1.00 V	118	49.7	-15.0
2	298.21	38.9 QP	46.0	-7.1	1.00 V	82	49.7	-10.8
3	400.02	29.9 QP	46.0	-16.1	1.50 V	157	37.8	-7.9
4	533.14	27.8 QP	46.0	-18.2	1.00 V	168	32.2	-4.4
5	697.94	33.3 QP	46.0	-12.7	2.00 V	35	34.0	-0.7
6	898.57	39.9 QP	46.0	-6.1	1.00 V	96	36.7	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

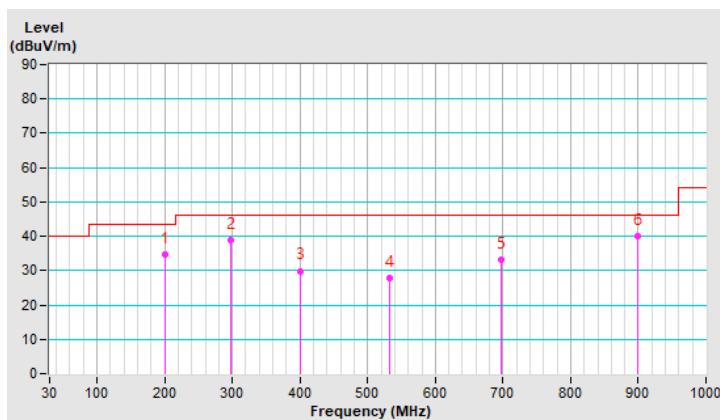

2T2S


Mode A

320 MHz Preamble 802.11be (RU996*3+484) - Channel 31

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	32.06	26.64	40	-13.36	-76.75	-76.06	4.76	-68.62
2	137.79	25.09	43.5	-18.41	-77.83	-78.05	4.76	-70.17
3	298.69	25.01	46	-20.99	-78.35	-77.71	4.76	-70.25
4	495.96	26.08	46	-19.92	-78.49	-75.82	4.76	-69.18
5	786.23	26	46	-20	-77.32	-76.76	4.76	-69.26
6	955.98	26.68	46	-19.32	-78.32	-75	4.76	-68.58

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

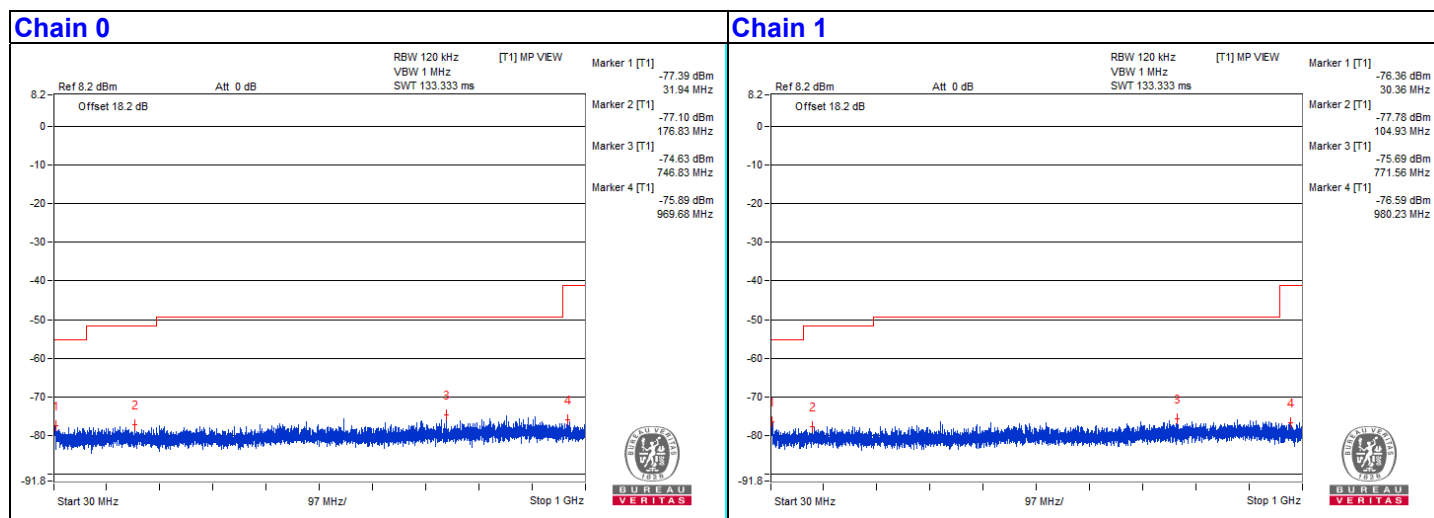


Mode B

RF Mode	802.11be (EHT) 3x996+484-tone MRU	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.47	24.5 QP	43.5	-19.0	1.50 H	131	41.2	-16.7
2	199.53	40.2 QP	43.5	-3.3	1.50 H	192	55.2	-15.0
3	299.00	42.2 QP	46.0	-3.8	1.00 H	9	53.0	-10.8
4	398.74	32.3 QP	46.0	-13.7	1.00 H	214	40.2	-7.9
5	698.95	40.3 QP	46.0	-5.7	1.00 H	55	41.0	-0.7
6	898.54	42.4 QP	46.0	-3.6	1.50 H	153	39.2	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

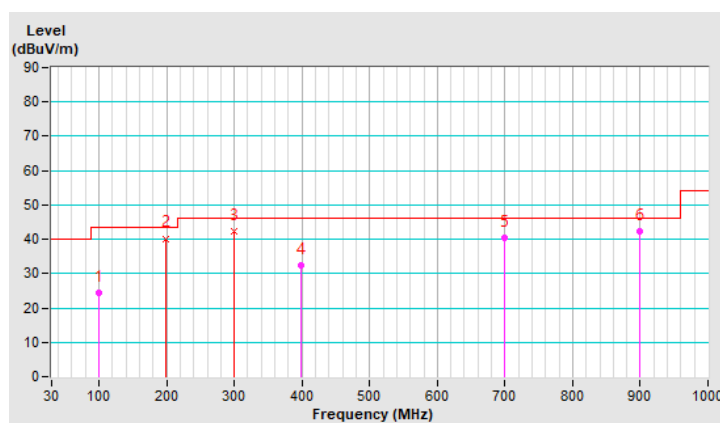


RF Mode	802.11be (EHT) 3x996+484-tone MRU	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.71	23.2 QP	40.0	-16.8	1.00 V	339	36.2	-13.0
2	199.37	34.5 QP	43.5	-9.0	1.50 V	132	49.5	-15.0
3	299.00	39.2 QP	46.0	-6.8	2.00 V	69	50.0	-10.8
4	398.64	30.3 QP	46.0	-15.7	1.50 V	184	38.2	-7.9
5	698.12	34.7 QP	46.0	-11.3	1.00 V	11	35.4	-0.7
6	898.33	40.3 QP	46.0	-5.7	1.50 V	154	37.1	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

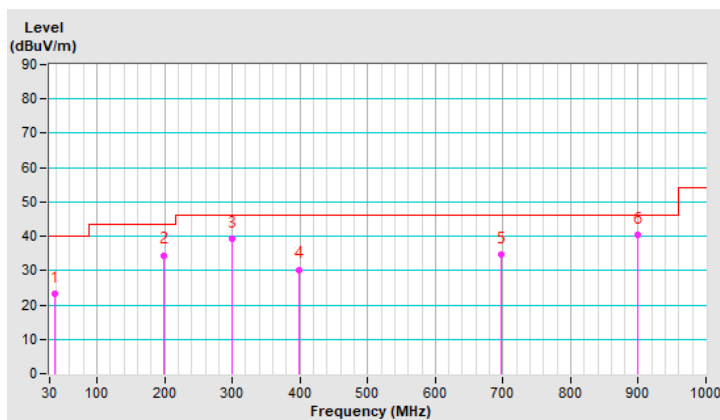

7.9 Unwanted Emissions above 1 GHz

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Emission Convert Formula

- a. $\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$
 $d = \text{measurement distance in 3 meters.}$
- b. $\text{EIRP Level (dBm)} = \text{Raw Value(dBm)} + \text{Correction Factor(dB)}$
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal
 For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.
 For the band edge the gain for the specific band may have been used.

Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:
 For $f = 30 - 1000 \text{ MHz}$, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.

Mode A

1T1S


20 MHz Preamble 802.11ax (RU26) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11901.56	43.33 PK	74	-30.67	-56.69	4.76	-51.93
2	11901.56	32.62 AV	54	-21.38	-67.4	4.76	-62.64
3	17871.43	43.78 PK	74	-30.22	-56.24	4.76	-51.48
4	17859.93	33.58 AV	54	-20.42	-66.44	4.76	-61.68

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

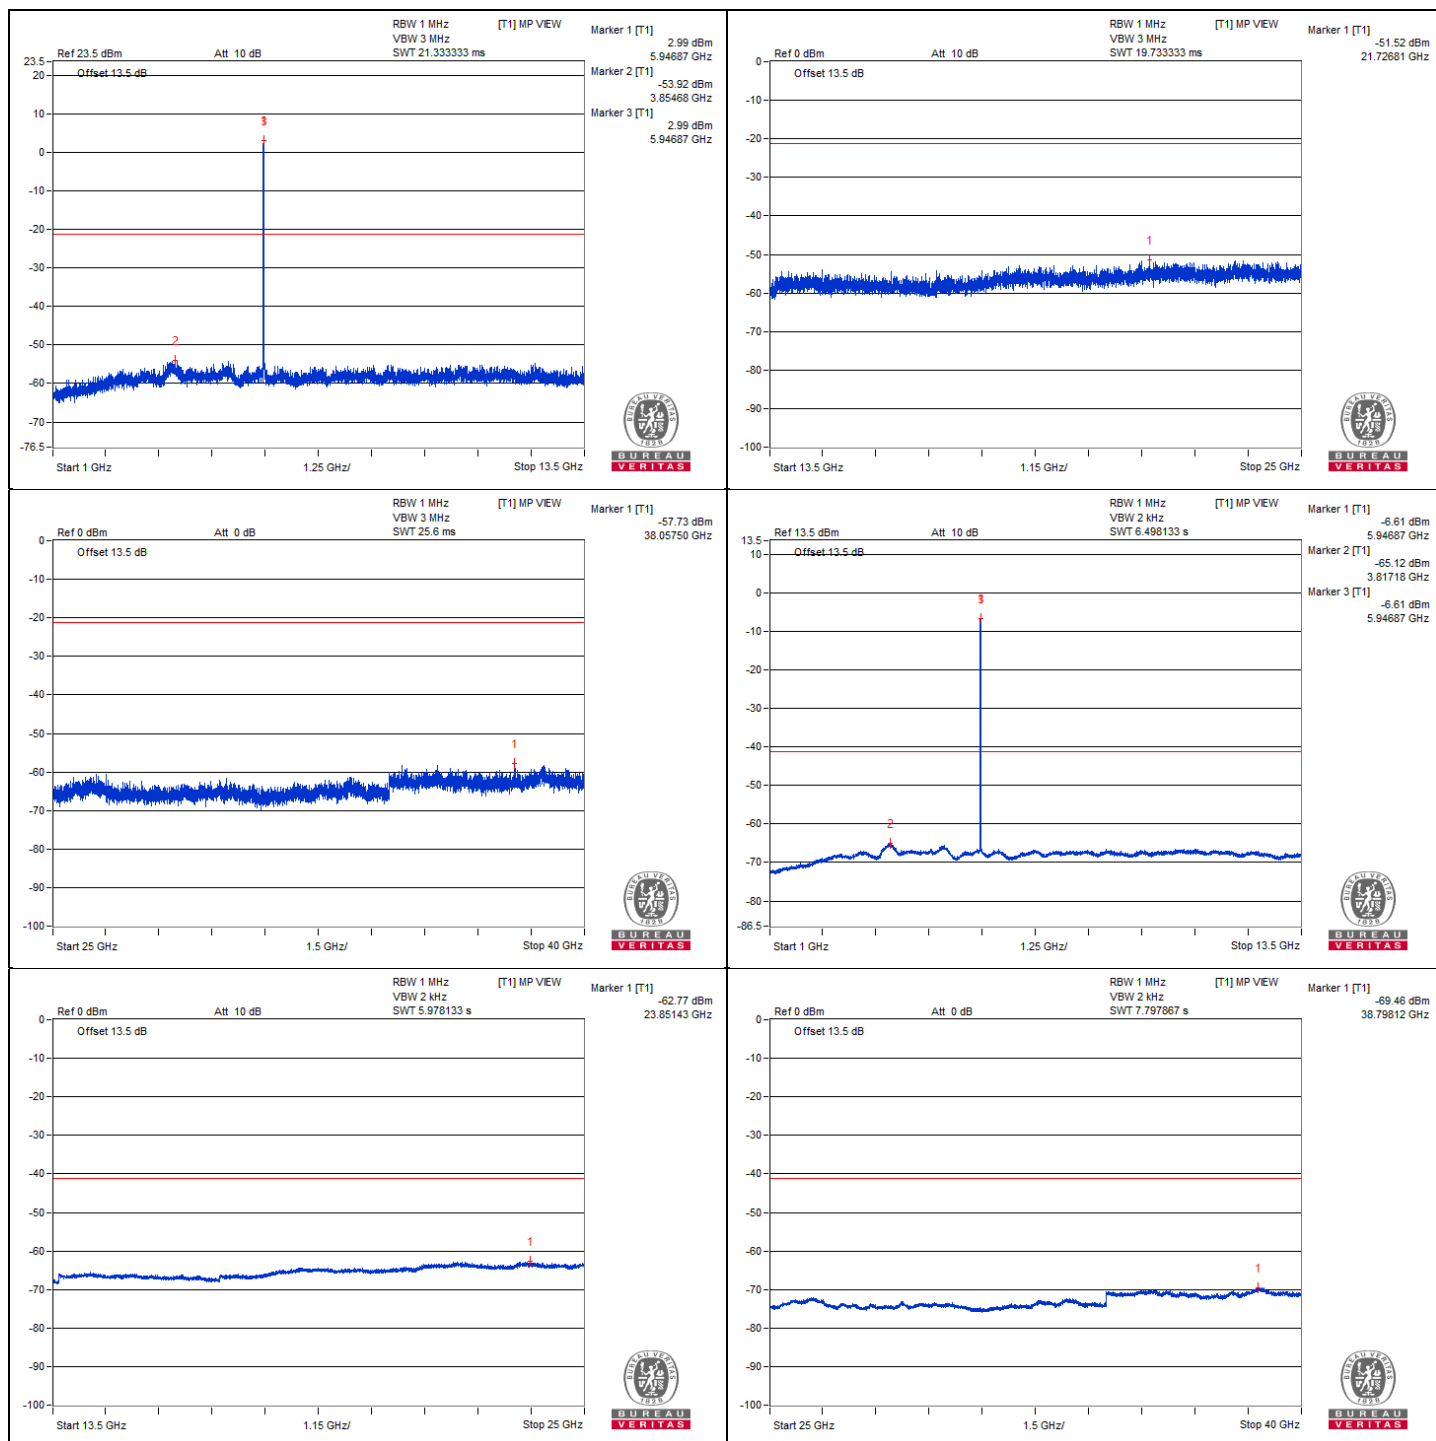


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5867.77	54.45 PK	88.2	-33.75	-45.57	4.76	-40.81
2	#5913.25	43.21 AV	68.2	-24.99	-56.81	4.76	-52.05

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

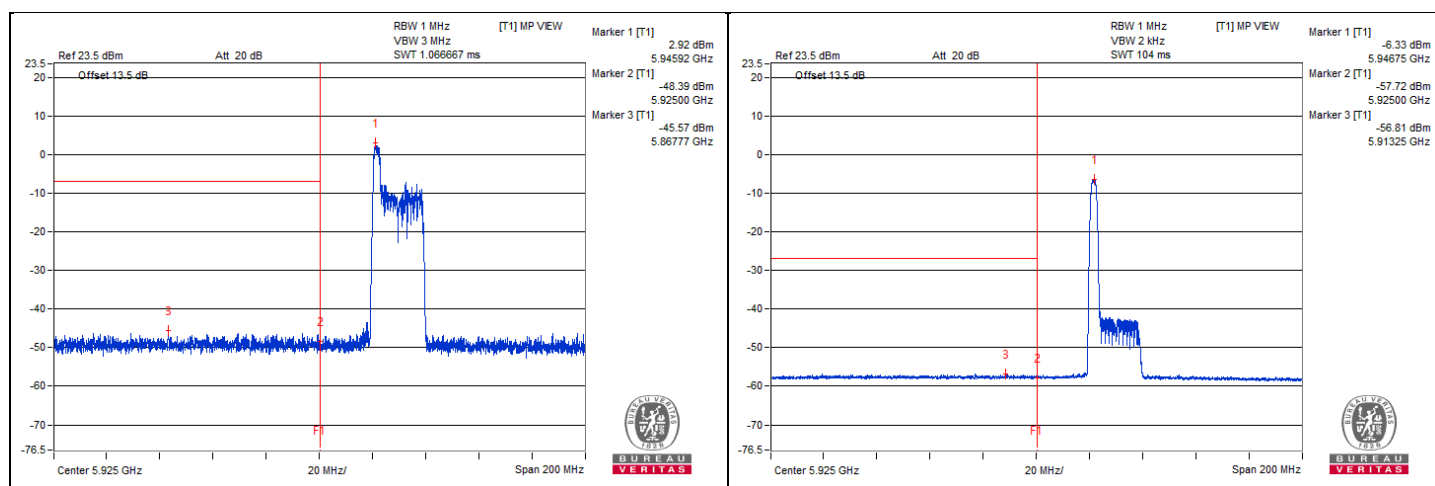


20 MHz Preamble 802.11ax (RU26) - Channel 45

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12345.31	43.8 PK	74	-30.2	-56.22	4.76	-51.46
2	12350	32.55 AV	54	-21.45	-67.47	4.76	-62.71
3	18516.87	46.07 PK	74	-27.93	-53.95	4.76	-49.19
4	18524.06	34.94 AV	54	-19.06	-65.08	4.76	-60.32

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

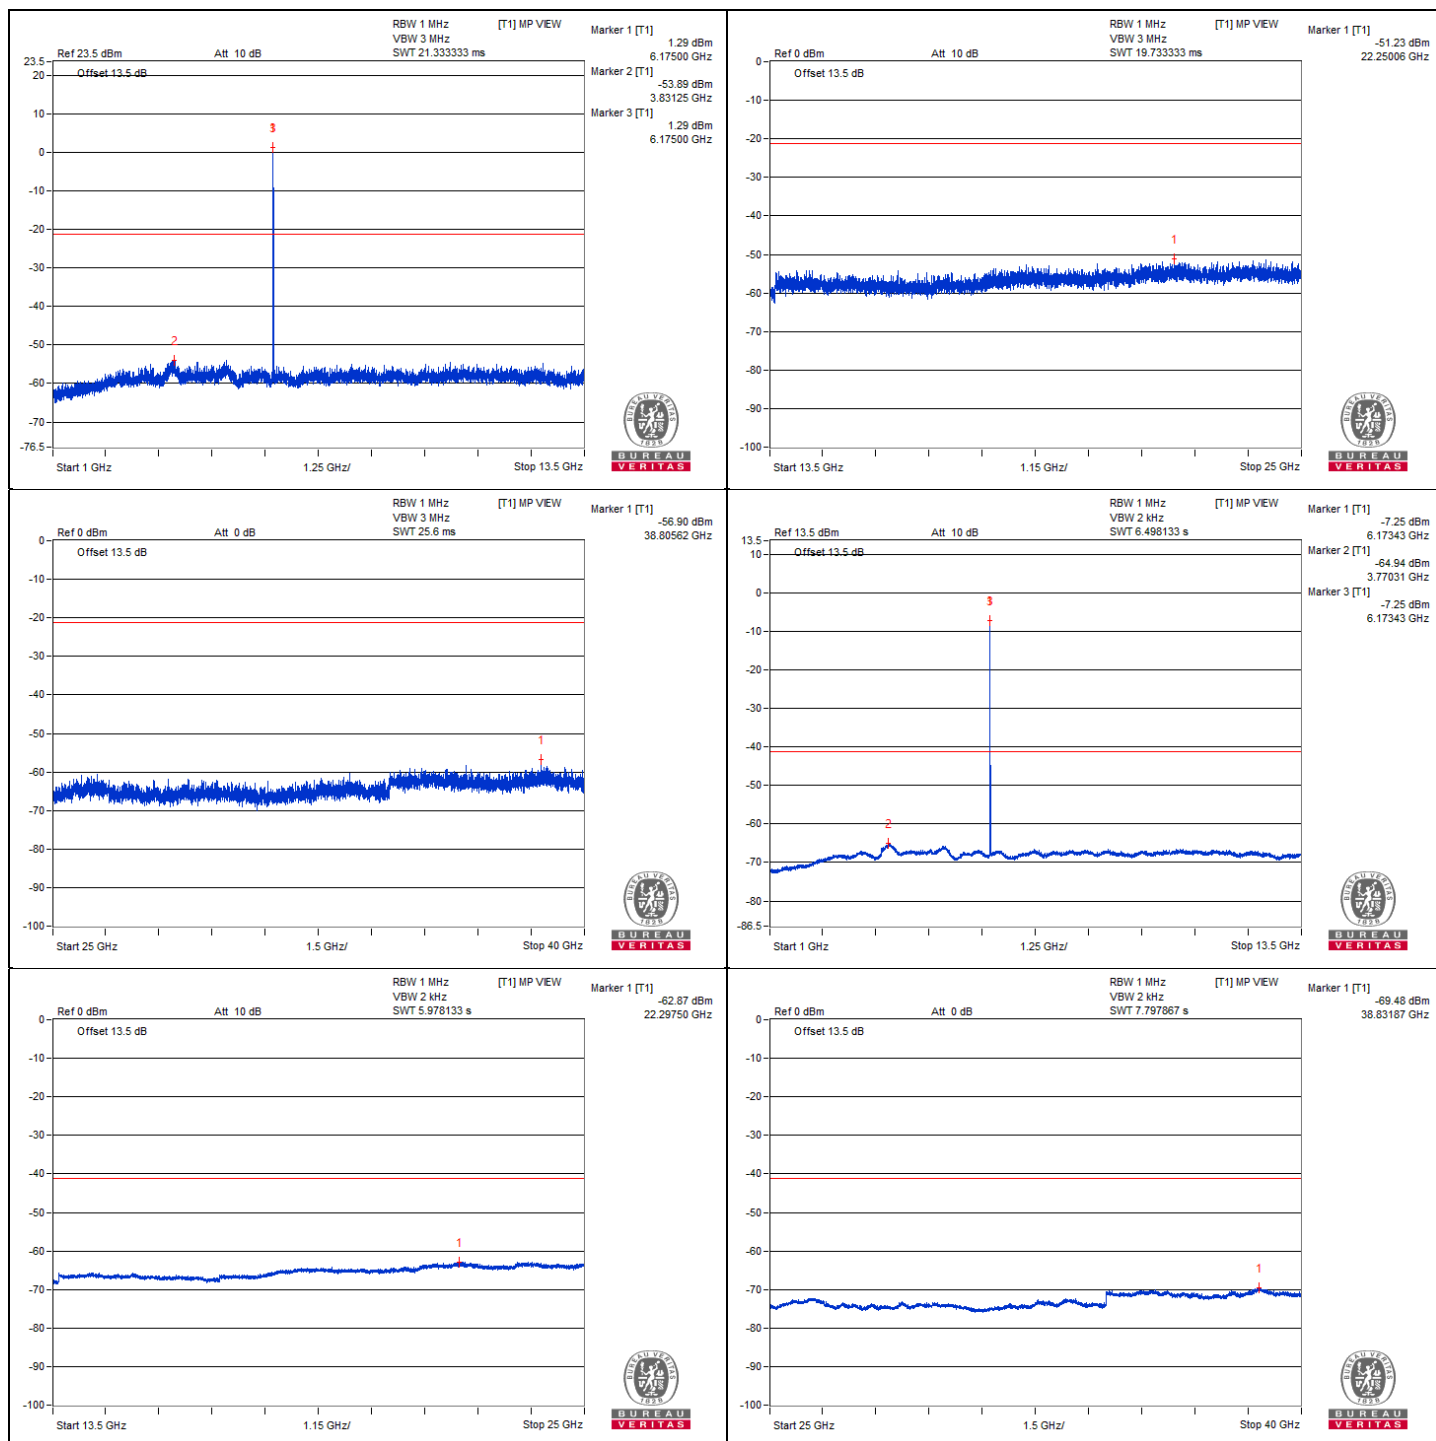


20 MHz Preamble 802.11ax (RU26) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12820.31	41.66 PK	88.2	-46.54	-58.36	4.76	-53.60
2	#12820.31	31.84 AV	68.2	-36.36	-68.18	4.76	-63.42
3	19252.87	45.89 PK	74	-28.11	-54.13	4.76	-49.37
4	19245.68	35.3 AV	54	-18.7	-64.72	4.76	-59.96

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

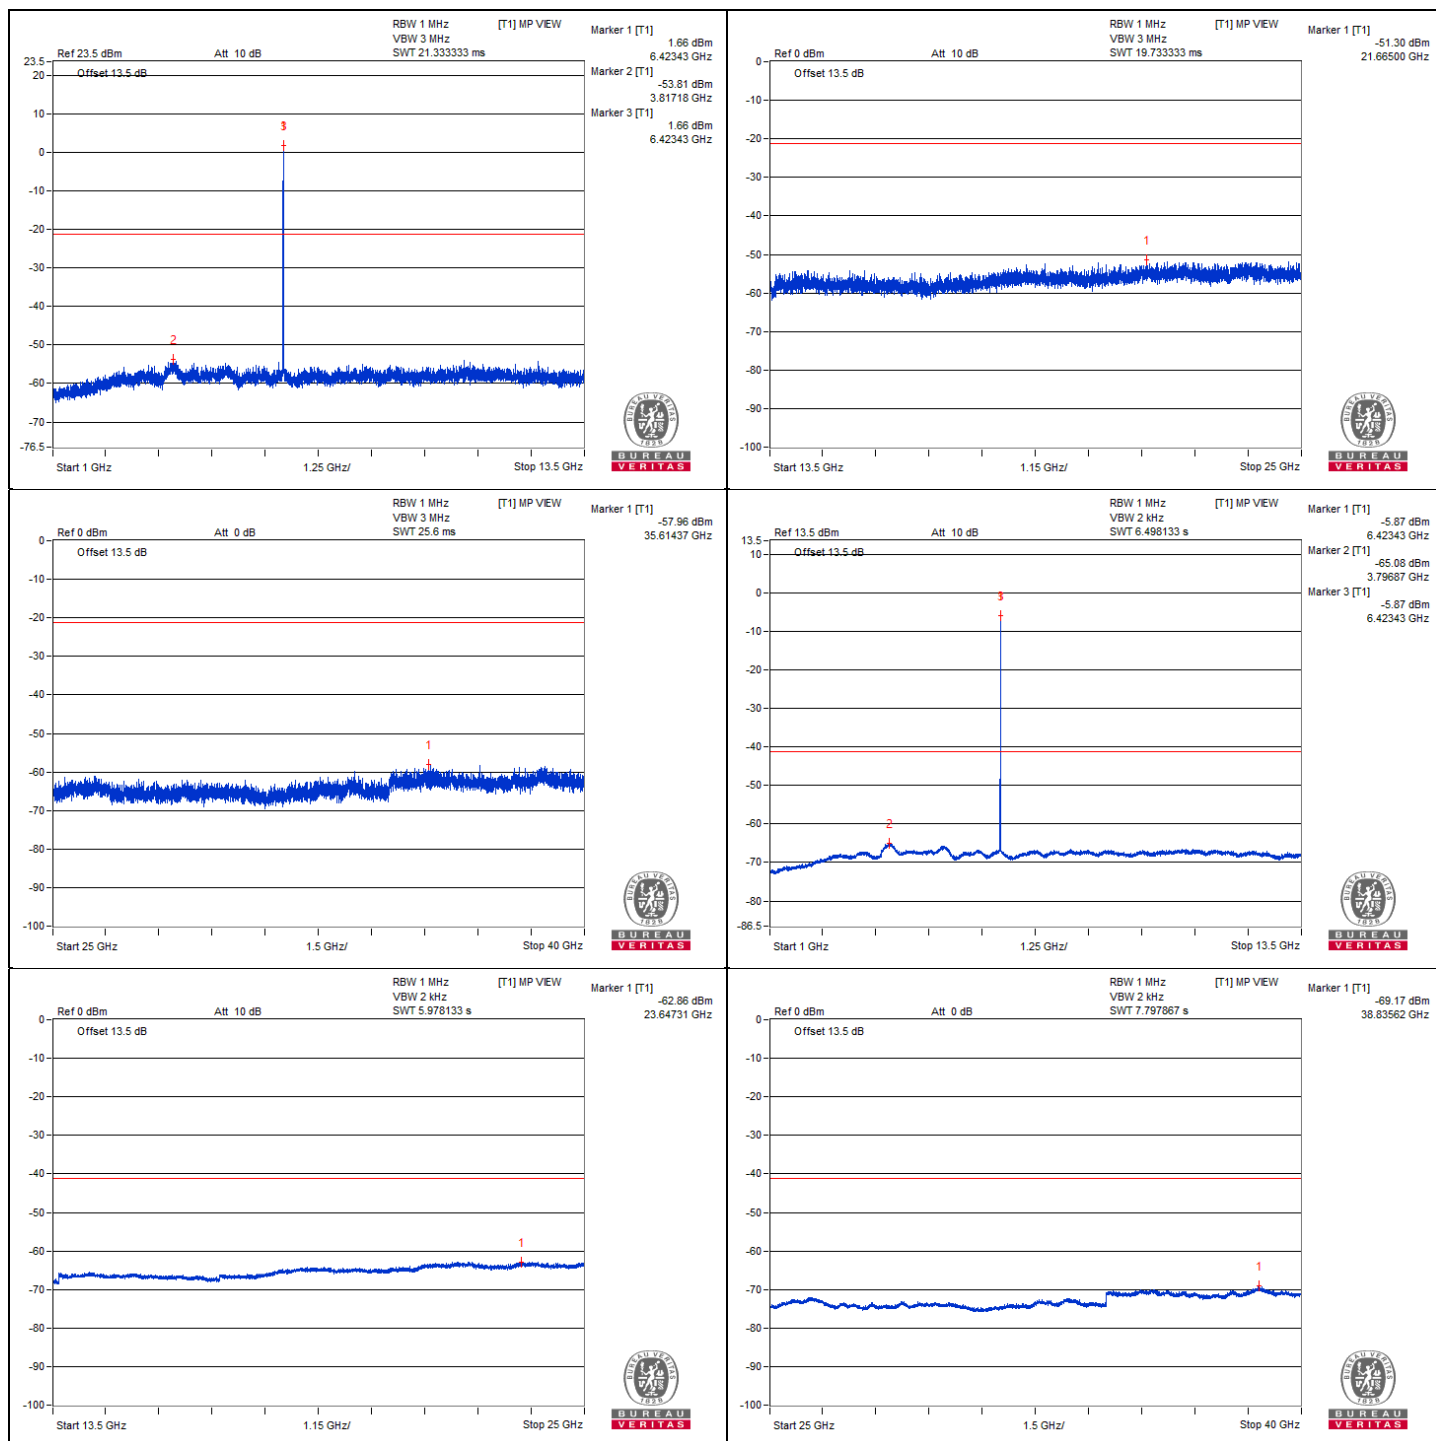


20 MHz Preamble 802.11ax (RU26) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12865.62	42.74 PK	88.2	-45.46	-57.28	4.76	-52.52
2	#12860.93	31.64 AV	68.2	-36.56	-68.38	4.76	-63.62
3	19300.31	45.68 PK	74	-28.32	-54.34	4.76	-49.58
4	19304.62	35.4 AV	54	-18.6	-64.62	4.76	-59.86

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

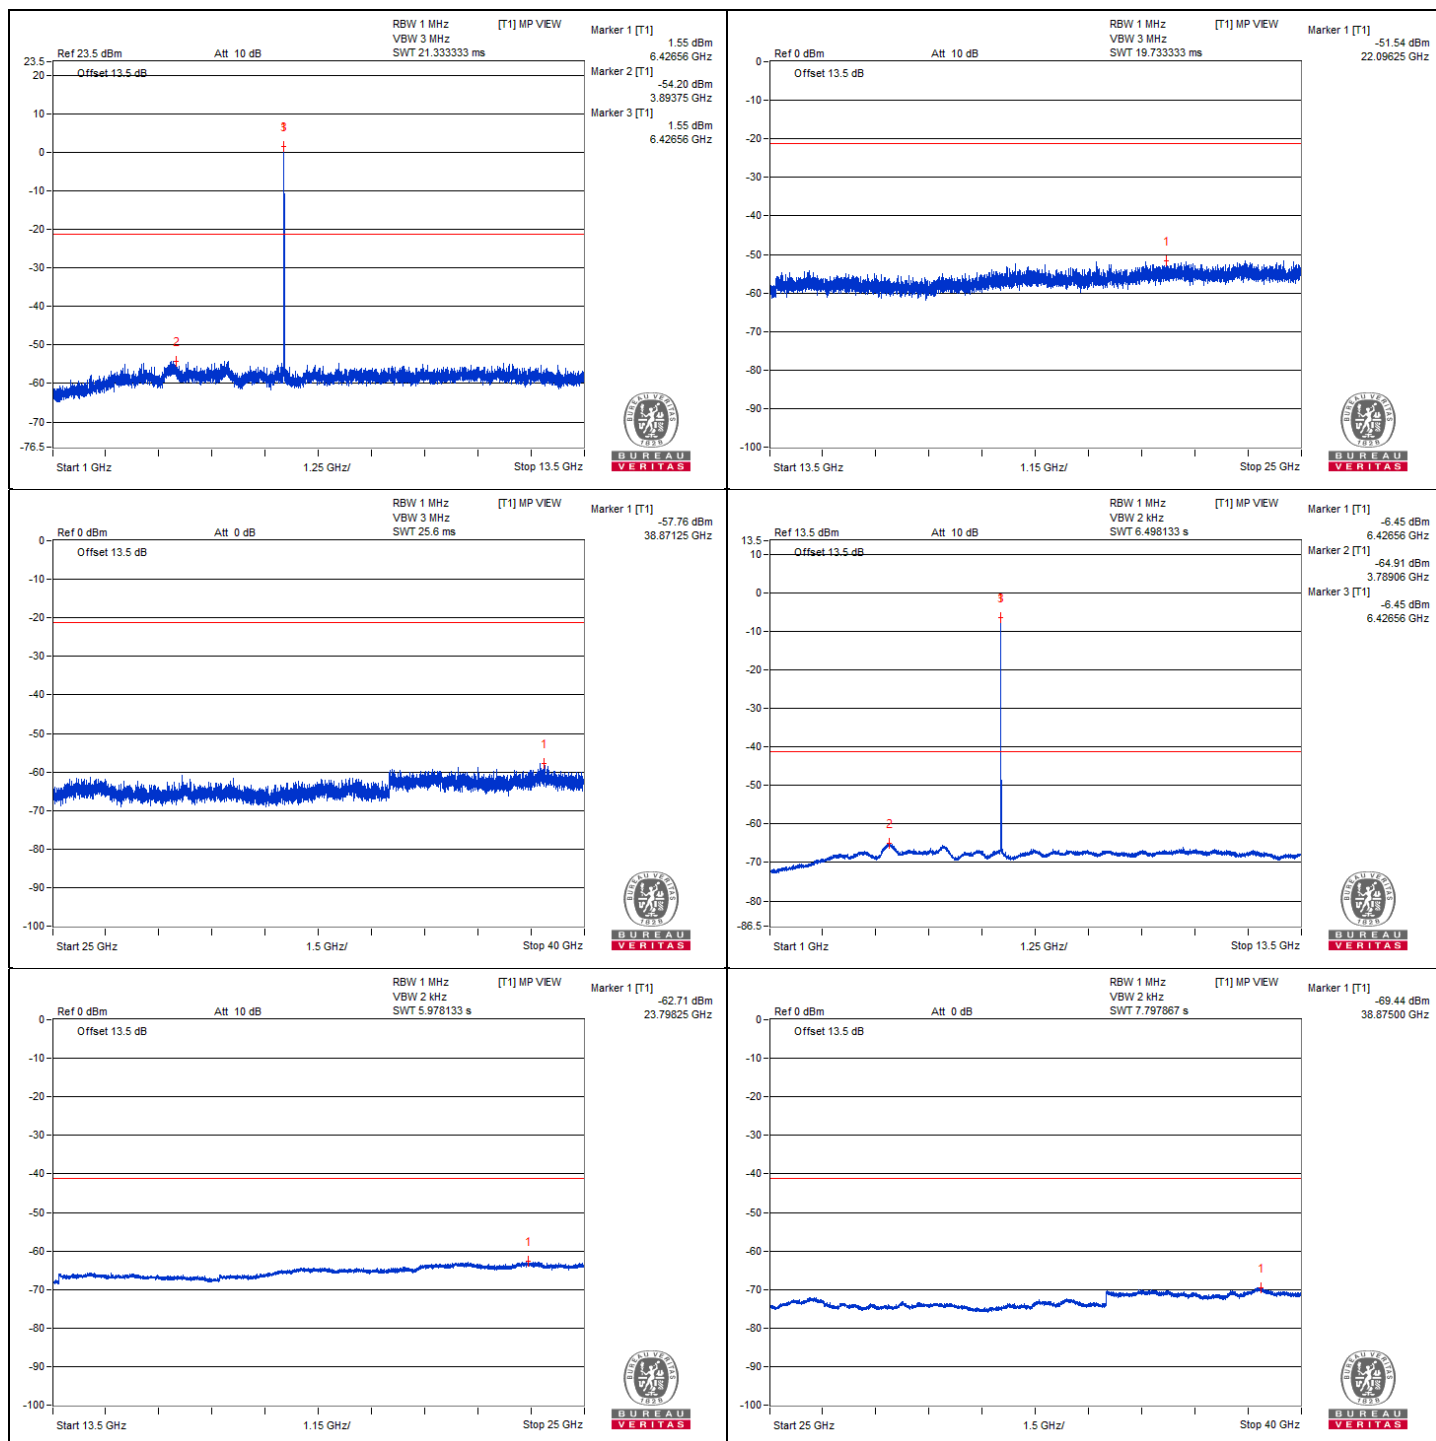


20 MHz Preamble 802.11ax (RU26) - Channel 105

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12954.68	42.74 PK	88.2	-45.46	-57.28	4.76	-52.52
2	#12959.37	31.35 AV	68.2	-36.85	-68.67	4.76	-63.91
3	19422.5	45.71 PK	74	-28.29	-54.31	4.76	-49.55
4	19416.75	35.41 AV	54	-18.59	-64.61	4.76	-59.85

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

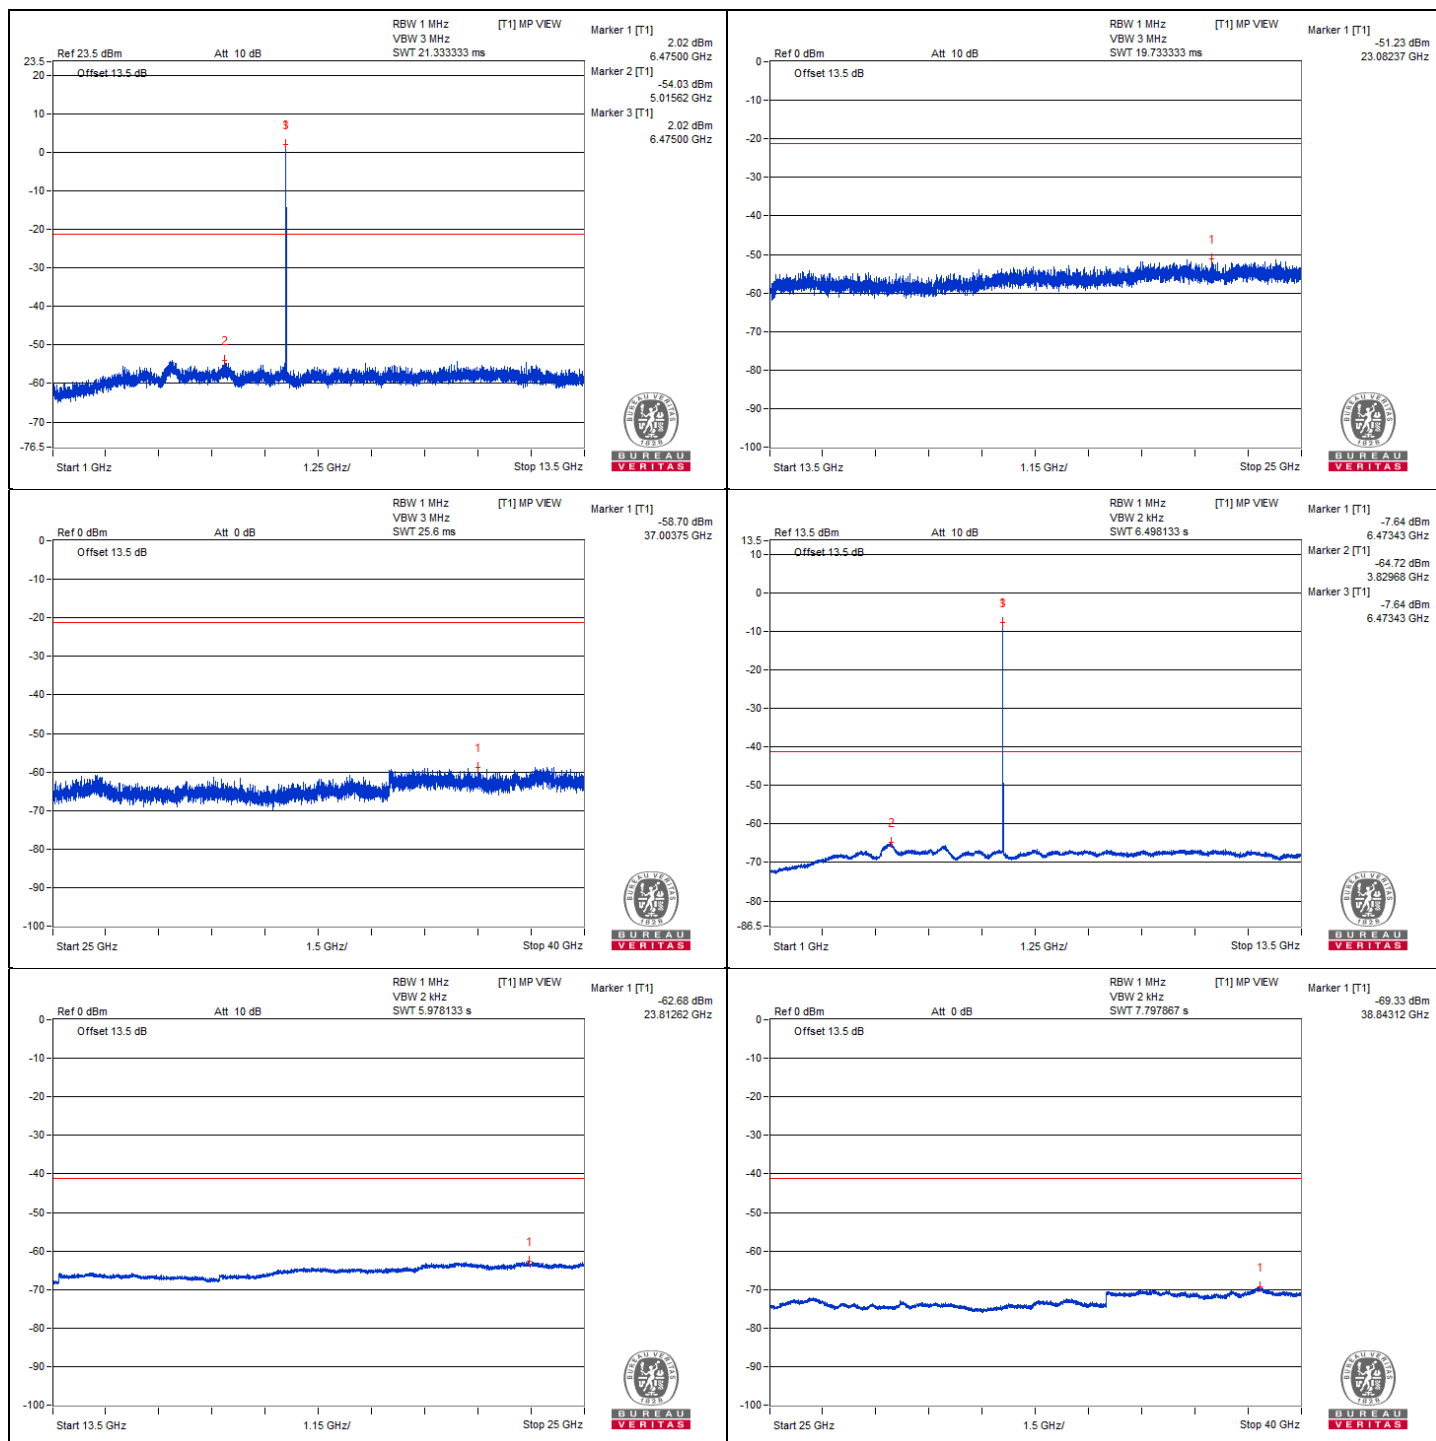


20 MHz Preamble 802.11ax (RU26) - Channel 113

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13026.56	42.79 PK	88.2	-45.41	-57.23	4.76	-52.47
2	#13034.37	31.71 AV	68.2	-36.49	-68.31	4.76	-63.55
3	19547.56	45.61 PK	74	-28.39	-54.41	4.76	-49.65
4	19547.56	35.27 AV	54	-18.73	-64.75	4.76	-59.99

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

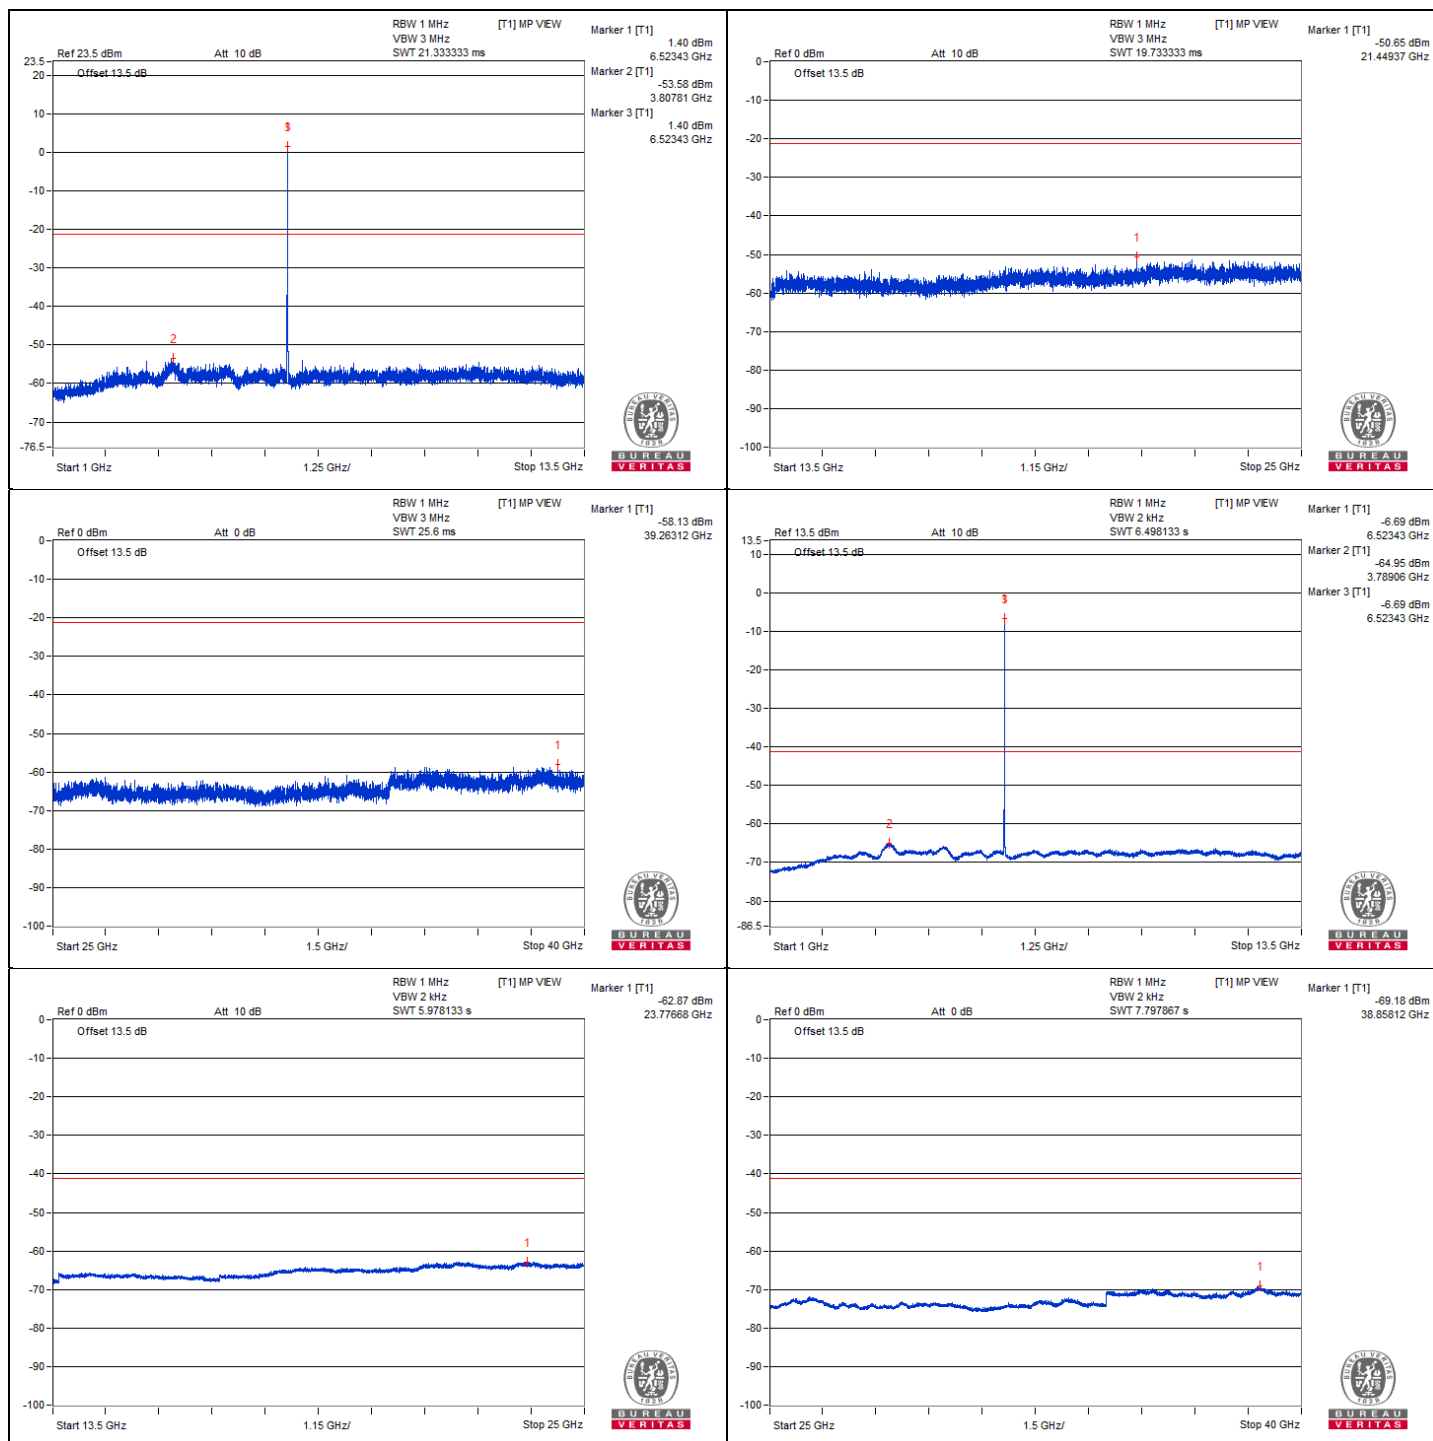


20 MHz Preamble 802.11ax (RU26) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13071.87	43.25 PK	88.2	-44.95	-56.77	4.76	-52.01
2	#13064.06	31.83 AV	68.2	-36.37	-68.19	4.76	-63.43
3	19612.25	44.43 PK	74	-29.57	-55.59	4.76	-50.83
4	19600.75	34.86 AV	54	-19.14	-65.16	4.76	-60.40

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

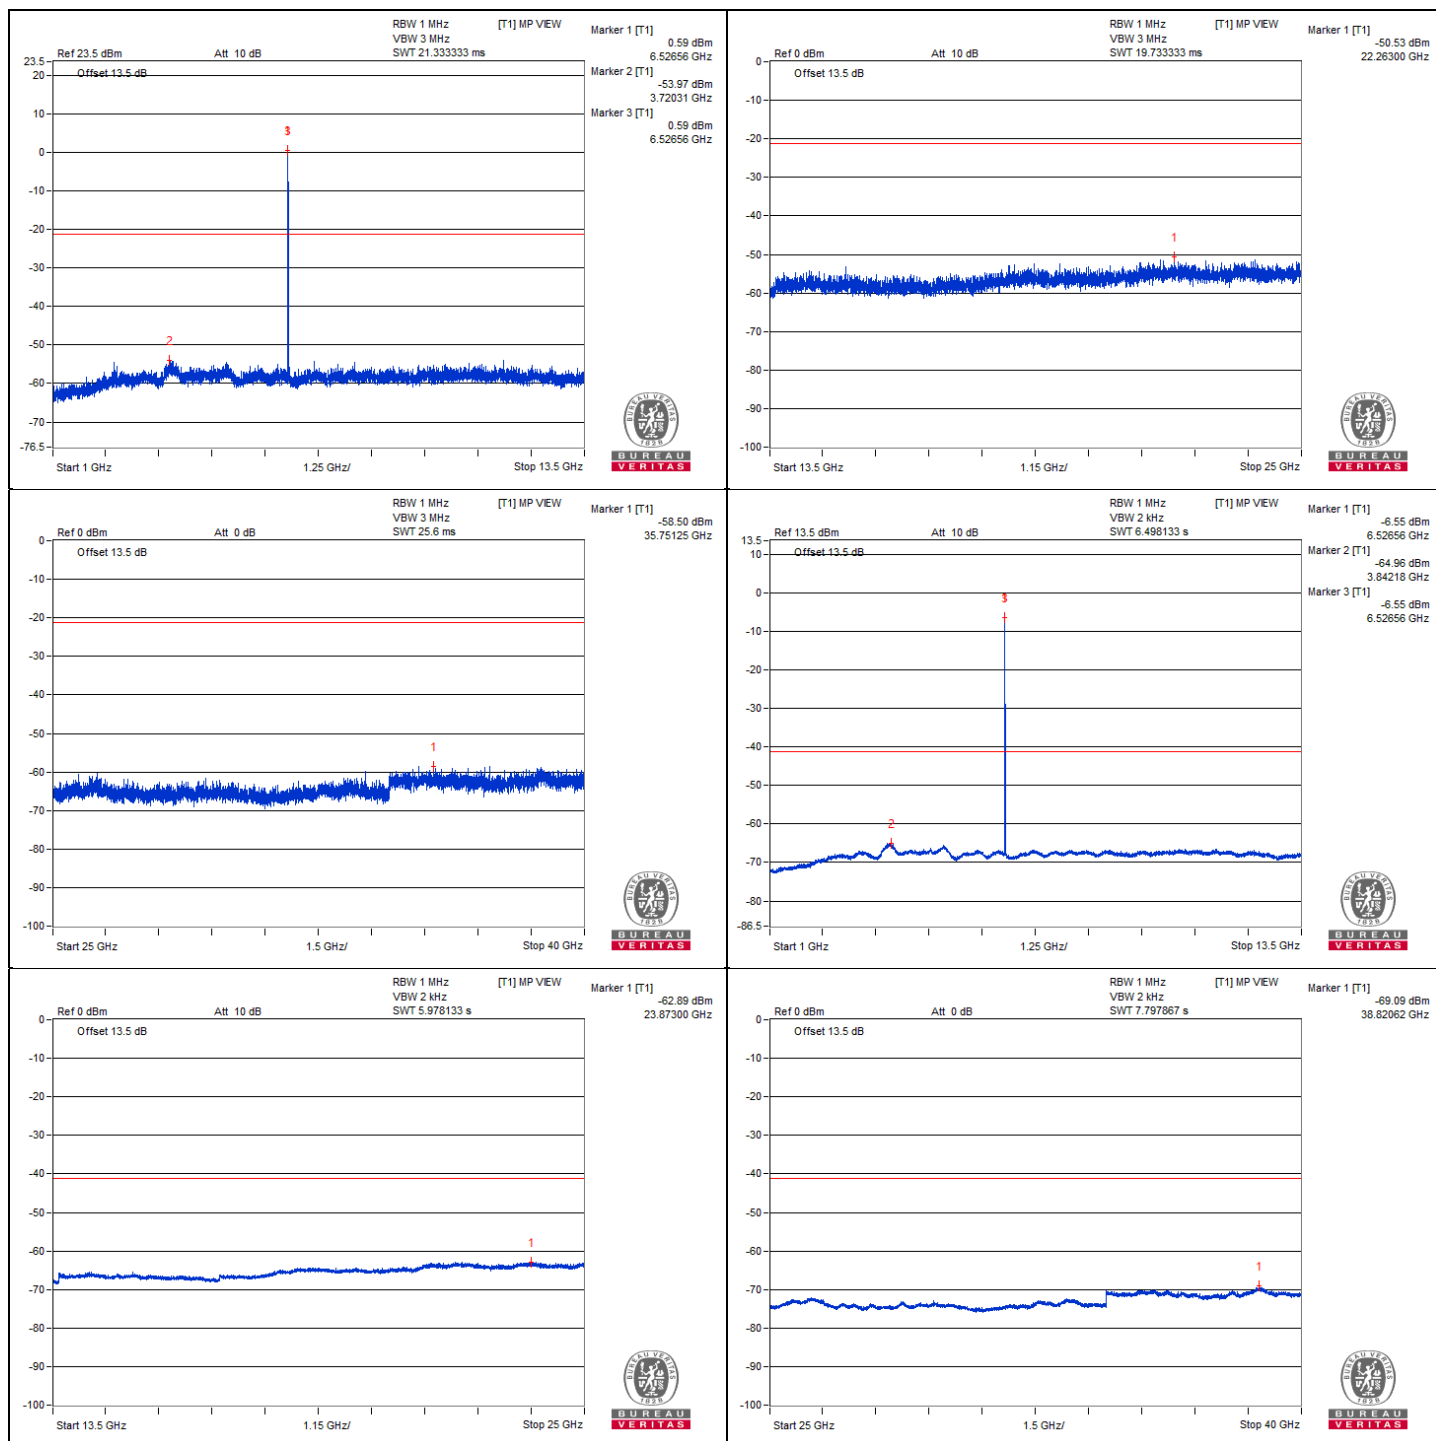


20 MHz Preamble 802.11ax (RU26) - Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13381.25	44.54 PK	74	-29.46	-55.48	4.76	-50.72
2	13396.87	31.97 AV	54	-22.03	-68.05	4.76	-63.29
3	20085.18	45.91 PK	74	-28.09	-54.11	4.76	-49.35
4	20088.06	35.49 AV	54	-18.51	-64.53	4.76	-59.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

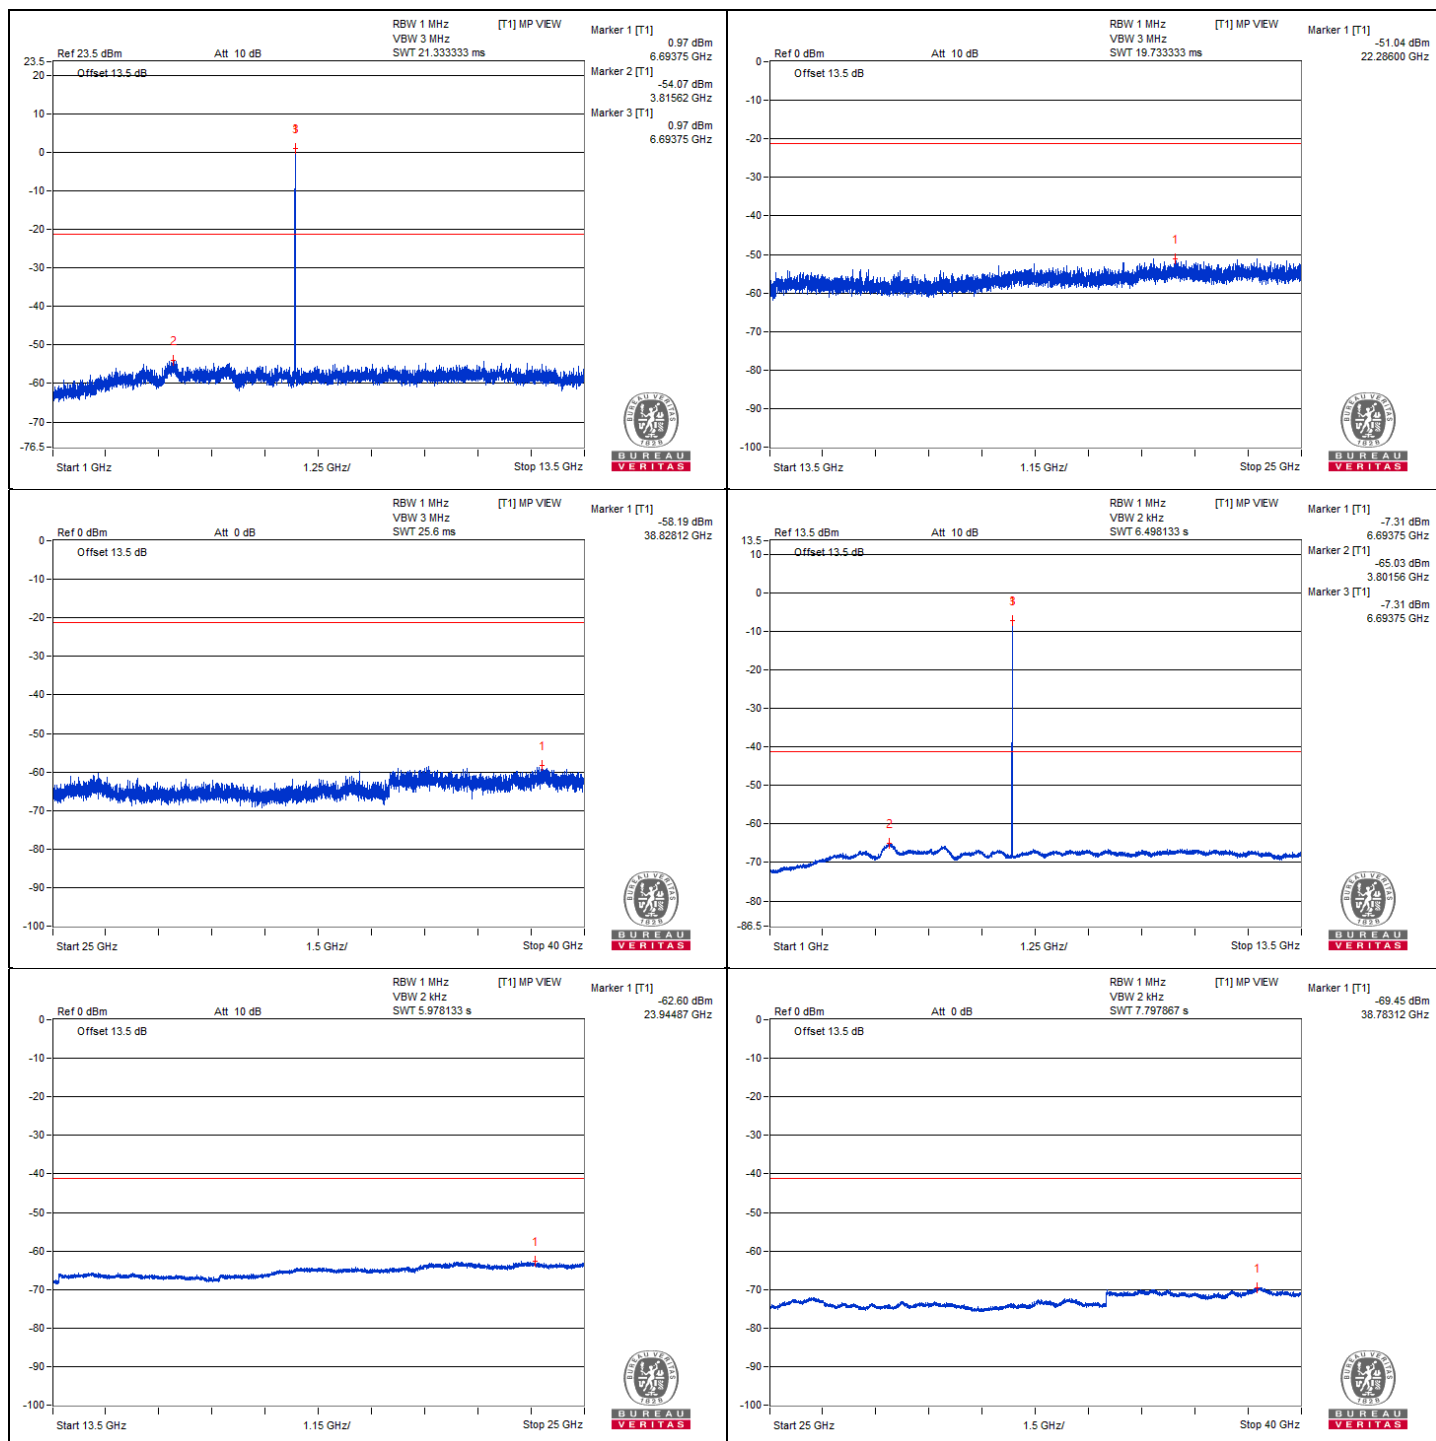


20 MHz Preamble 802.11ax (RU26) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13705.56	43.29 PK	88.2	-44.91	-56.73	4.76	-51.97
2	#13708.43	33.75 AV	68.2	-34.45	-66.27	4.76	-61.51
3	20561	45.49 PK	74	-28.51	-54.53	4.76	-49.77
4	20558.12	35.33 AV	54	-18.67	-64.69	4.76	-59.93

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

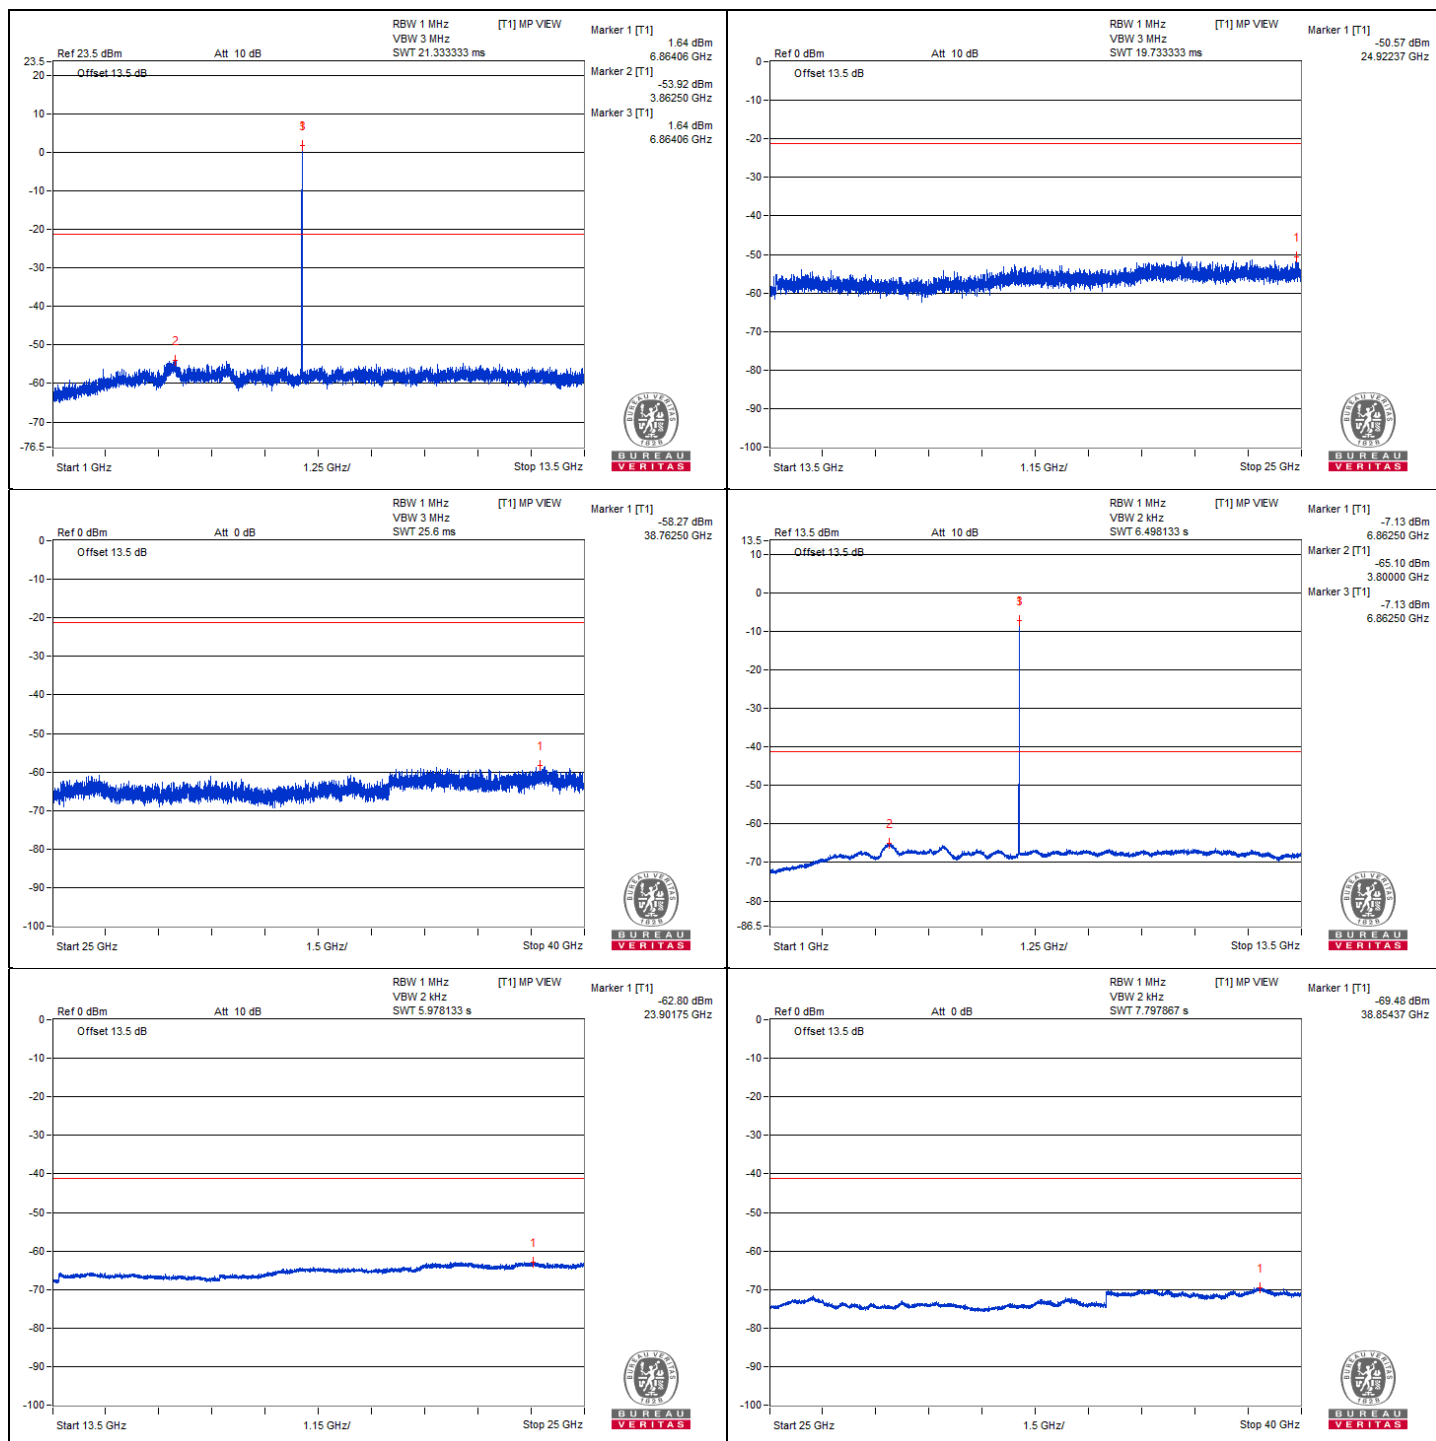


20 MHz Preamble 802.11ax (RU26) - Channel 185

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13755.87	42.66 PK	88.2	-45.54	-57.36	4.76	-52.60
2	#13758.75	33.59 AV	68.2	-34.61	-66.43	4.76	-61.67
3	20617.06	46.1 PK	74	-27.9	-53.92	4.76	-49.16
4	20615.62	35.05 AV	54	-18.95	-64.97	4.76	-60.21

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

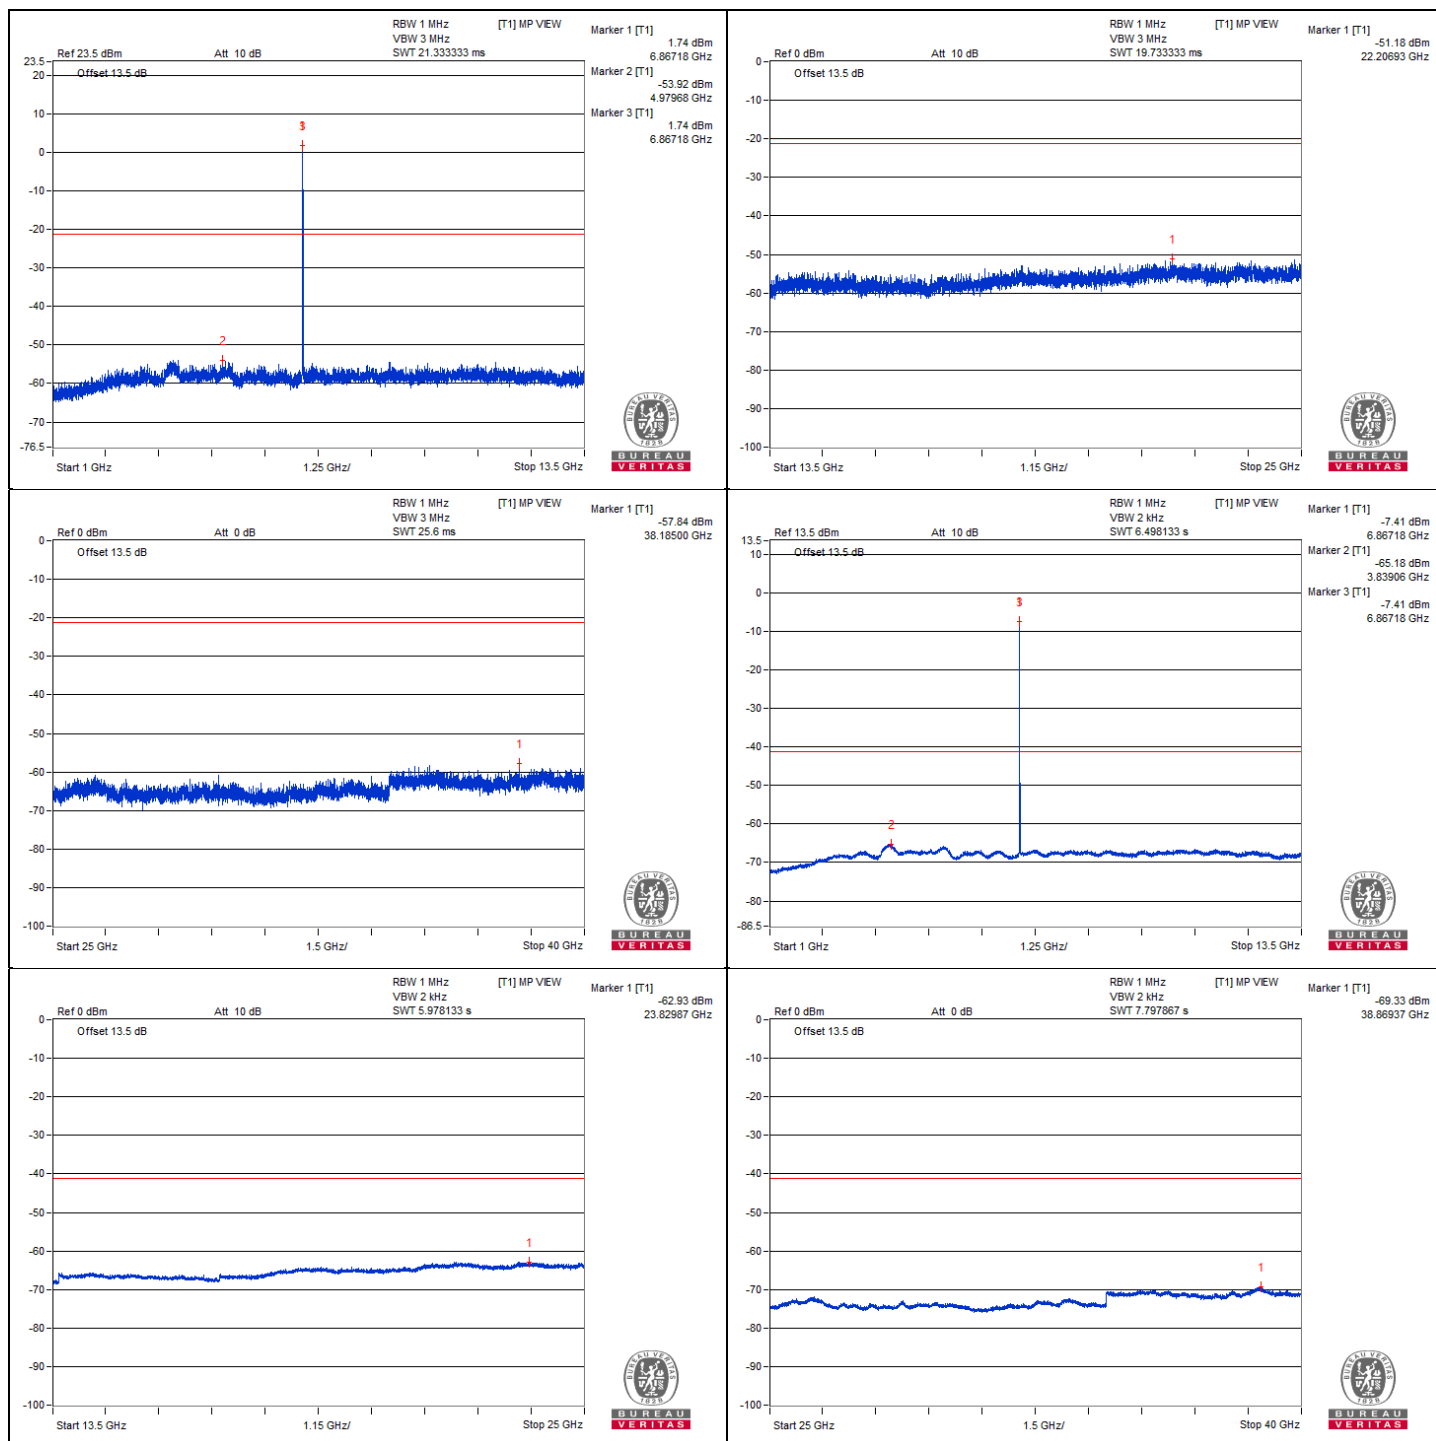


20 MHz Preamble 802.11ax (RU26) - Channel 209

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13988.75	43.35 PK	88.2	-44.85	-56.67	4.76	-51.91
2	#13988.75	33.86 AV	68.2	-34.34	-66.16	4.76	-61.40
3	20985.06	45.8 PK	74	-28.2	-54.22	4.76	-49.46
4	20987.93	35.29 AV	54	-18.71	-64.73	4.76	-59.97

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

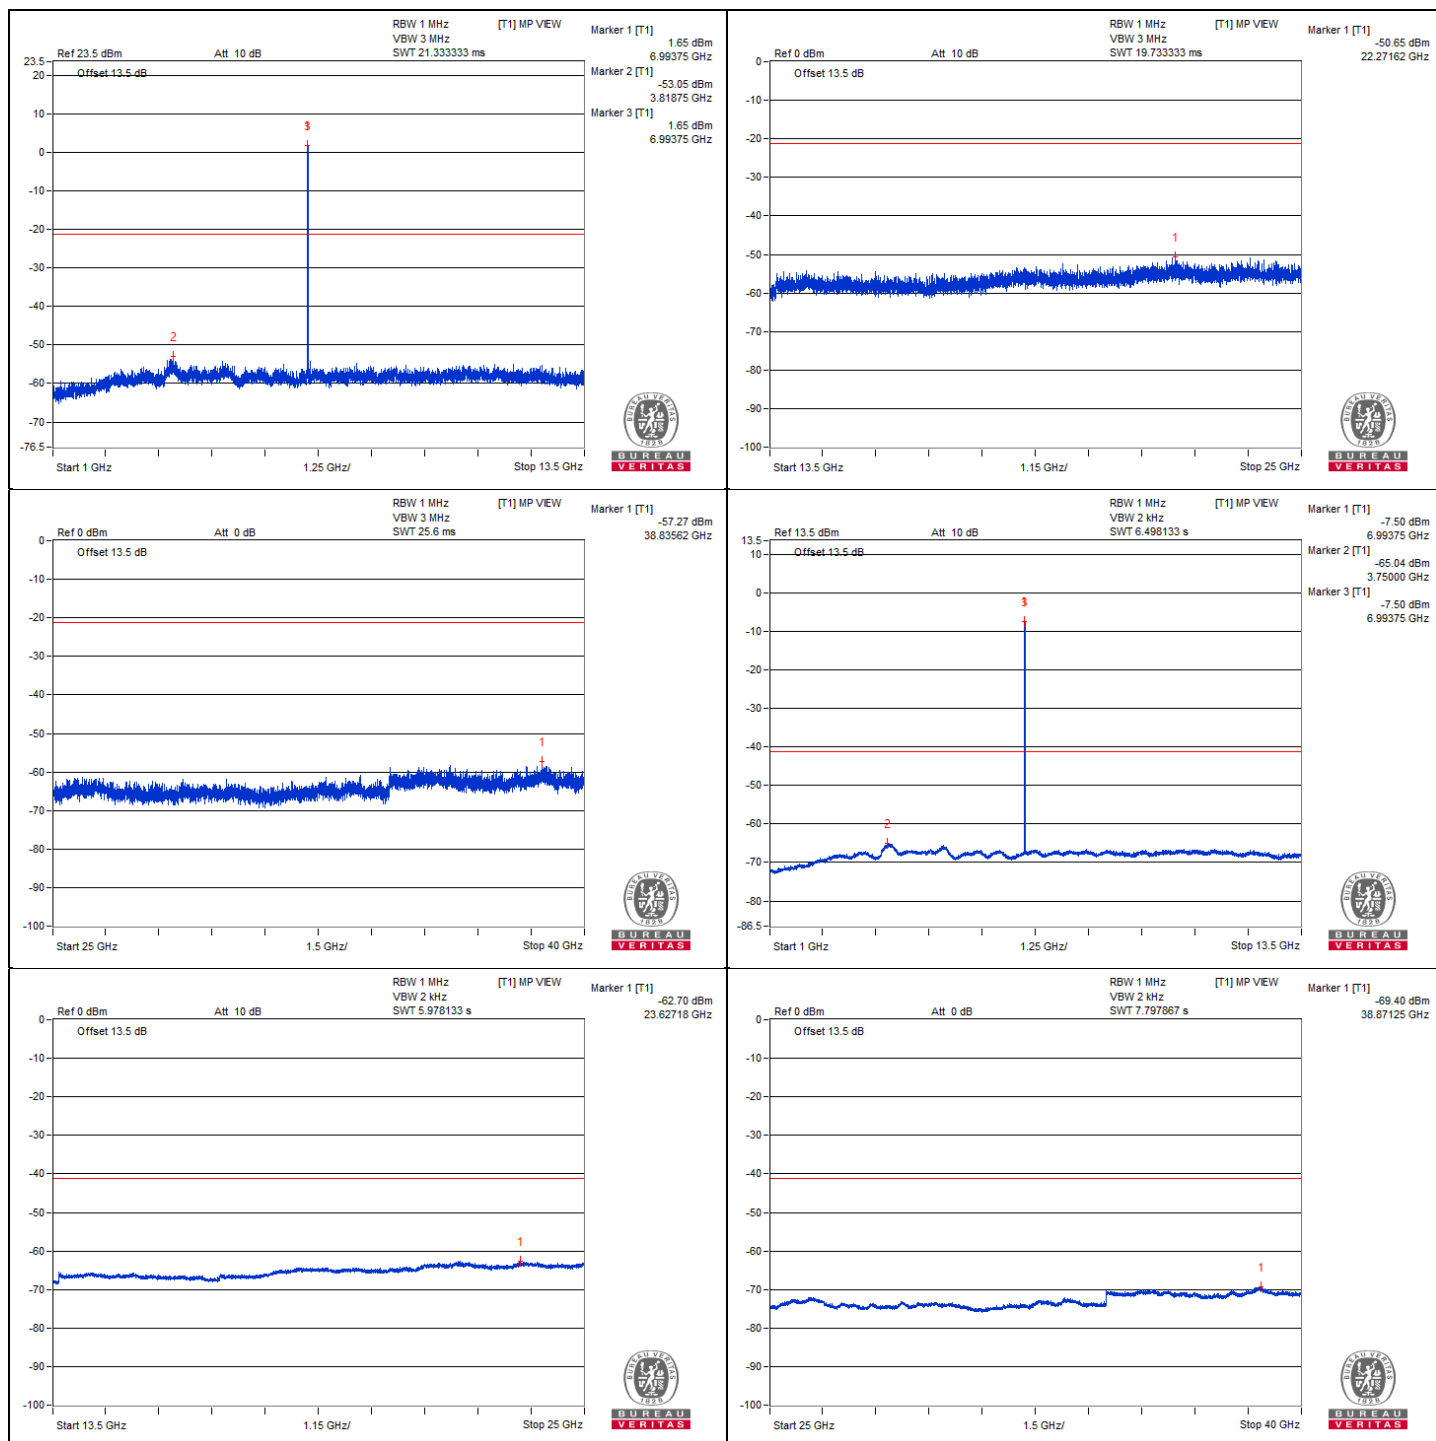


20 MHz Preamble 802.11ax (RU26) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14246.06	44.61 PK	88.2	-43.59	-55.41	4.76	-50.65
2	#14238.87	34.08 AV	68.2	-34.12	-65.94	4.76	-61.18
3	21343	45.93 PK	74	-28.07	-54.09	4.76	-49.33
4	21347.31	35.32 AV	54	-18.68	-64.7	4.76	-59.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

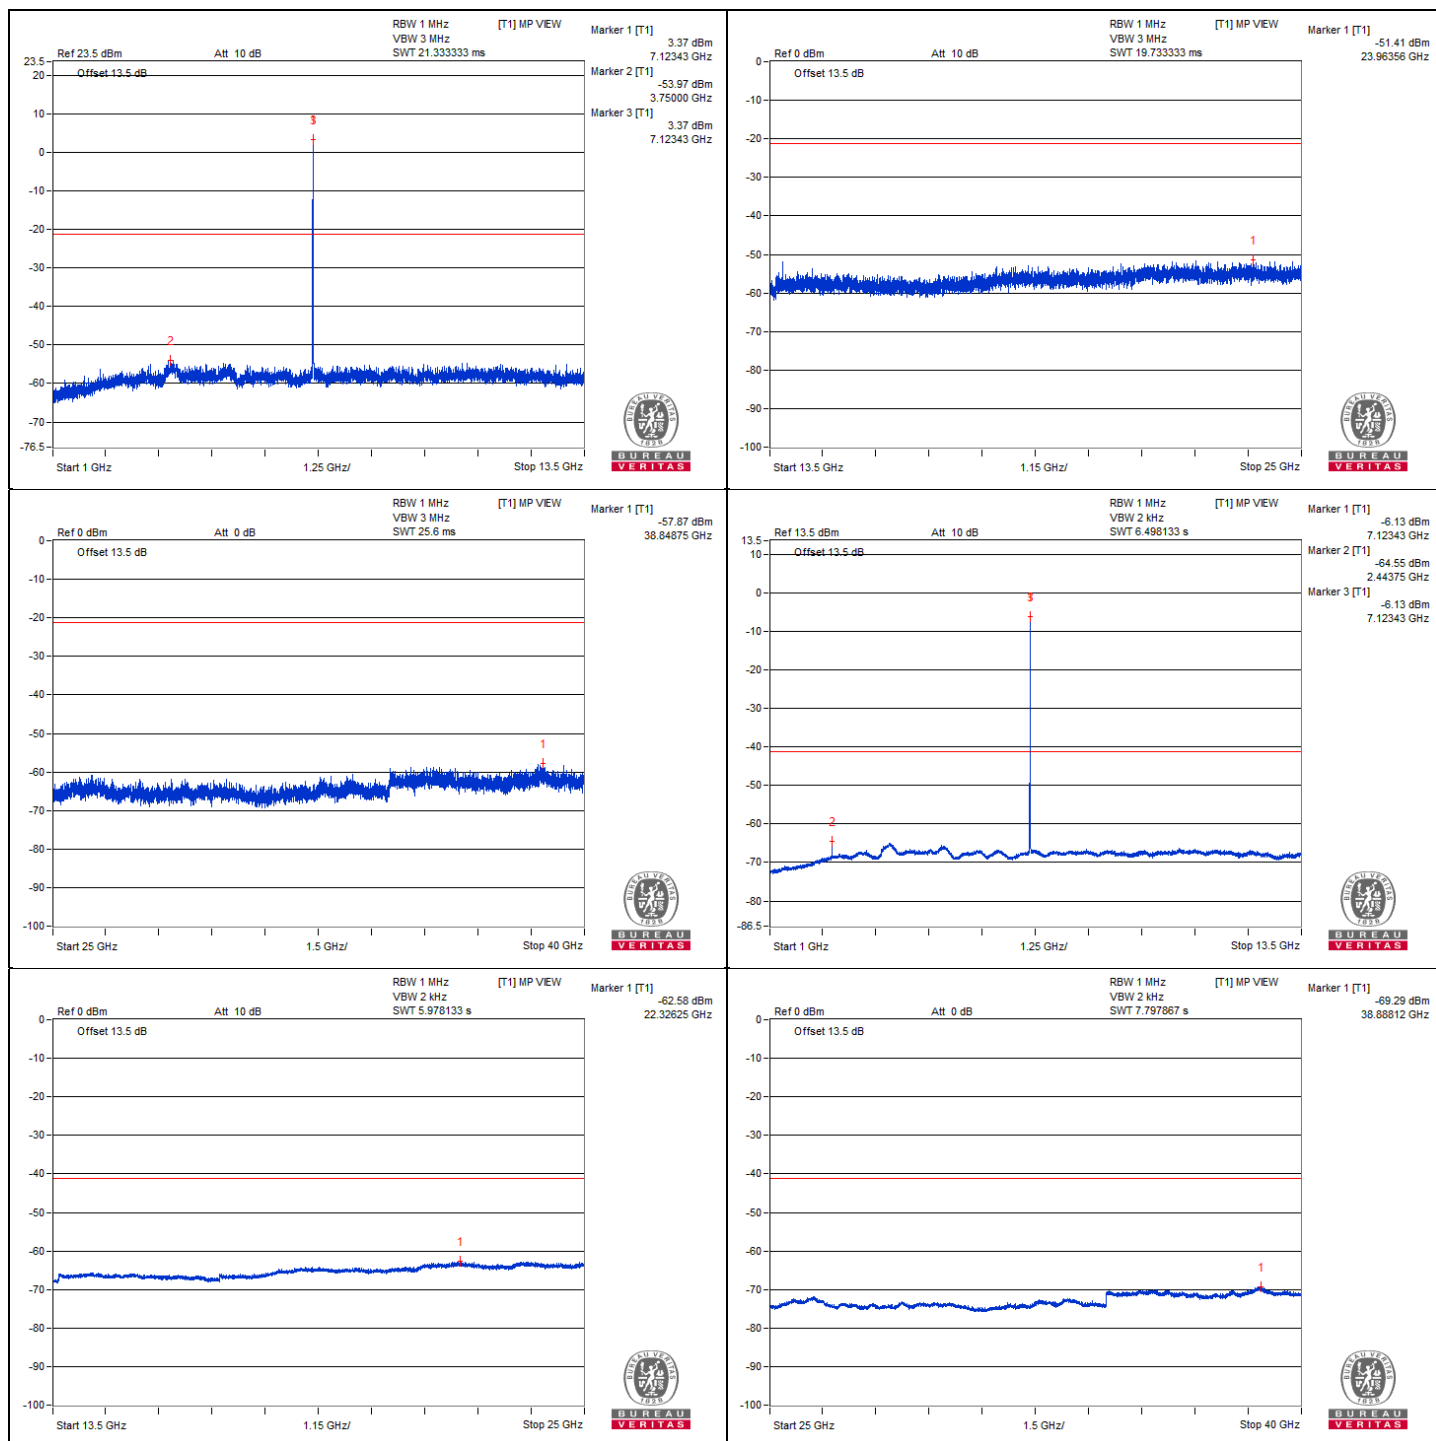


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	60.13 PK	88.2	-28.07	-39.22	4.09	-35.13
2	#7125	48.63 AV	68.2	-19.57	-50.72	4.09	-46.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

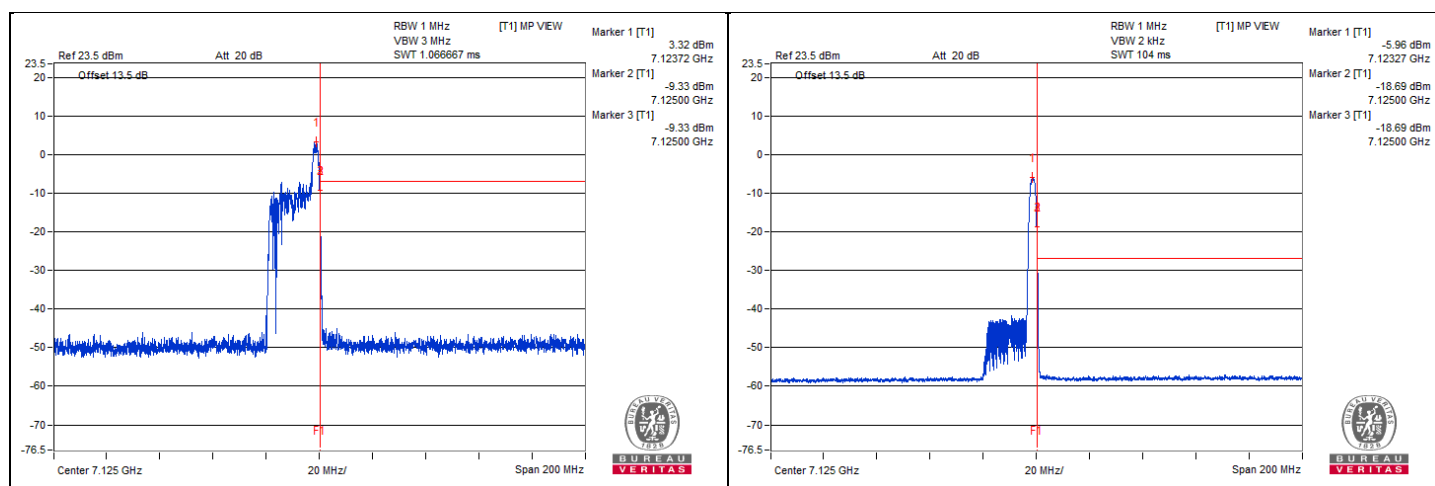







20 MHz Preamble 802.11ax (RU52) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11903.12	43.39 PK	74	-30.61	-56.63	4.76	-51.87
2	11901.56	32.95 AV	54	-21.05	-67.07	4.76	-62.31
3	17867.12	44.28 PK	74	-29.72	-55.74	4.76	-50.98
4	17862.81	33.73 AV	54	-20.27	-66.29	4.76	-61.53

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

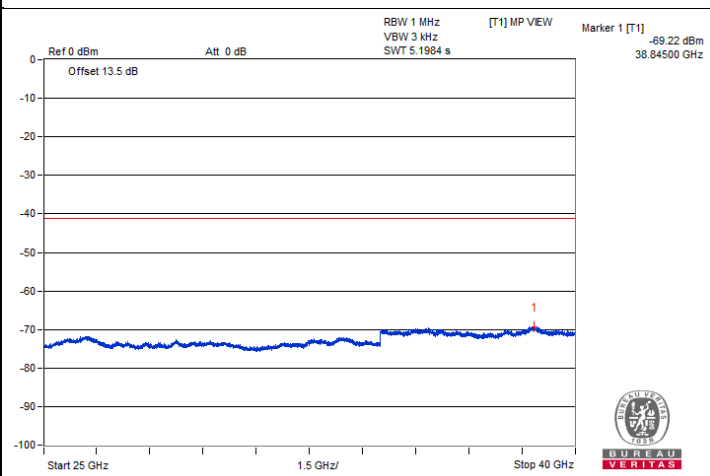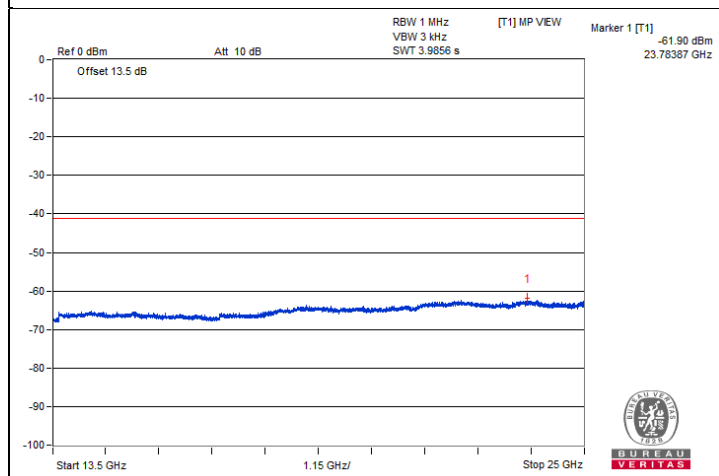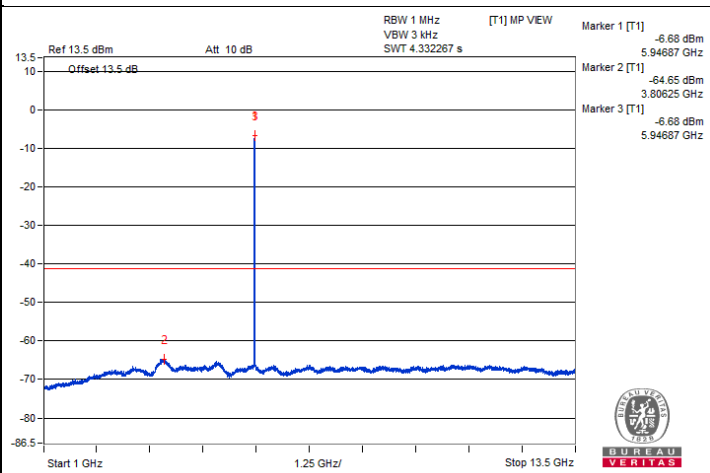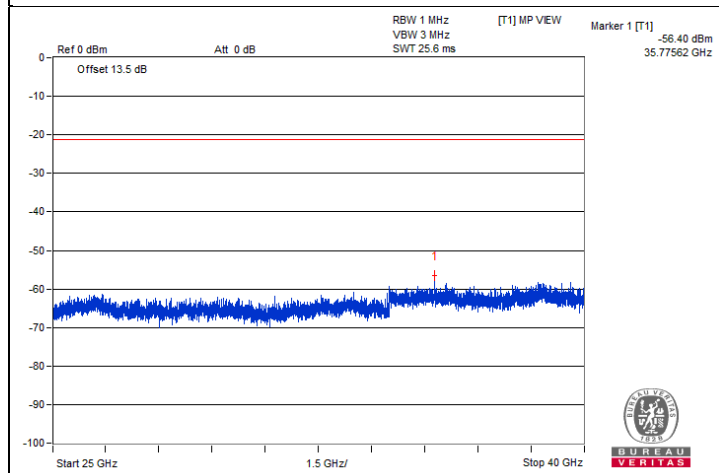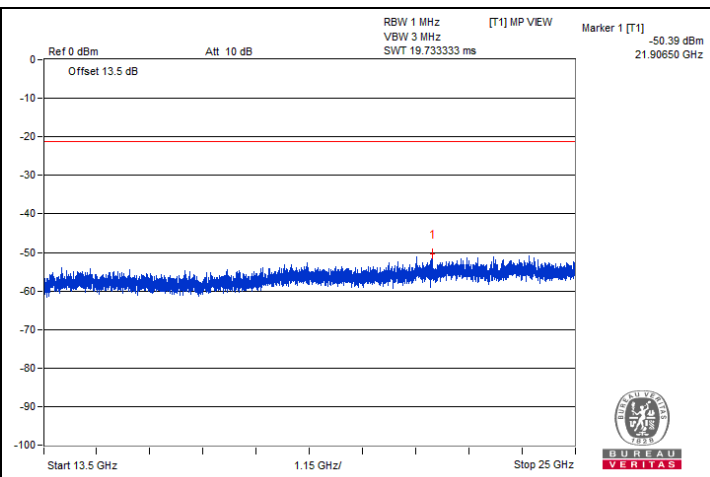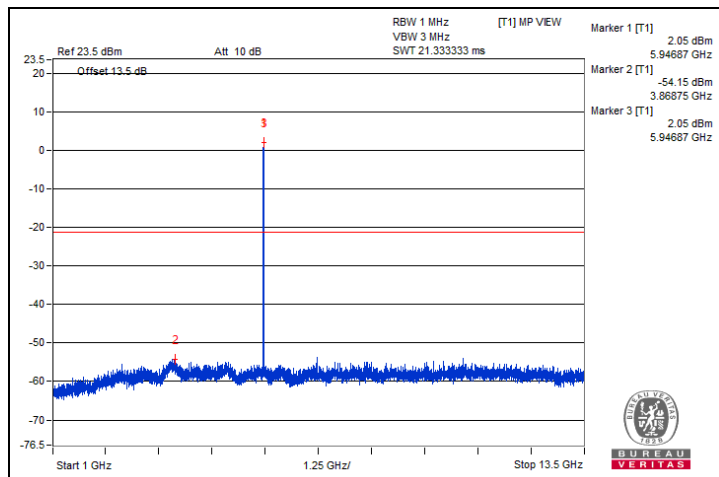


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5899.52	54.65 PK	88.2	-33.55	-45.37	4.76	-40.61
2	#5837.52	43.39 AV	68.2	-24.81	-56.63	4.76	-51.87

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

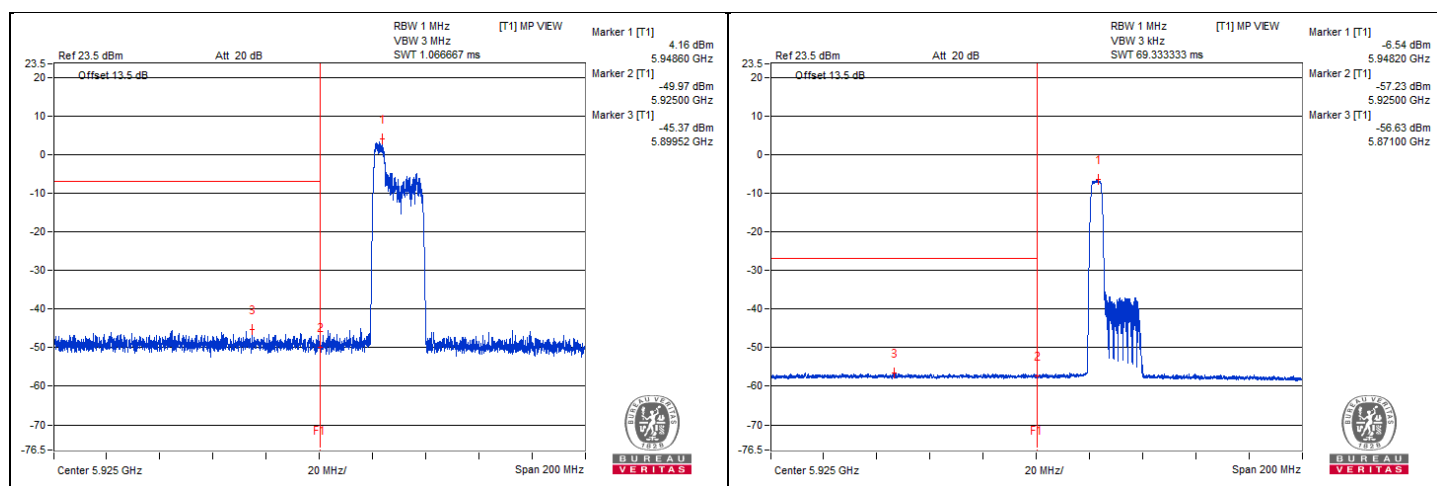


20 MHz Preamble 802.11ax (RU52) - Channel 45

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12343.75	44.17 PK	74	-29.83	-55.85	4.76	-51.09
2	12348.43	33.23 AV	54	-20.77	-66.79	4.76	-62.03
3	18521.18	46.76 PK	74	-27.24	-53.26	4.76	-48.50
4	18532.68	35.27 AV	54	-18.73	-64.75	4.76	-59.99

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

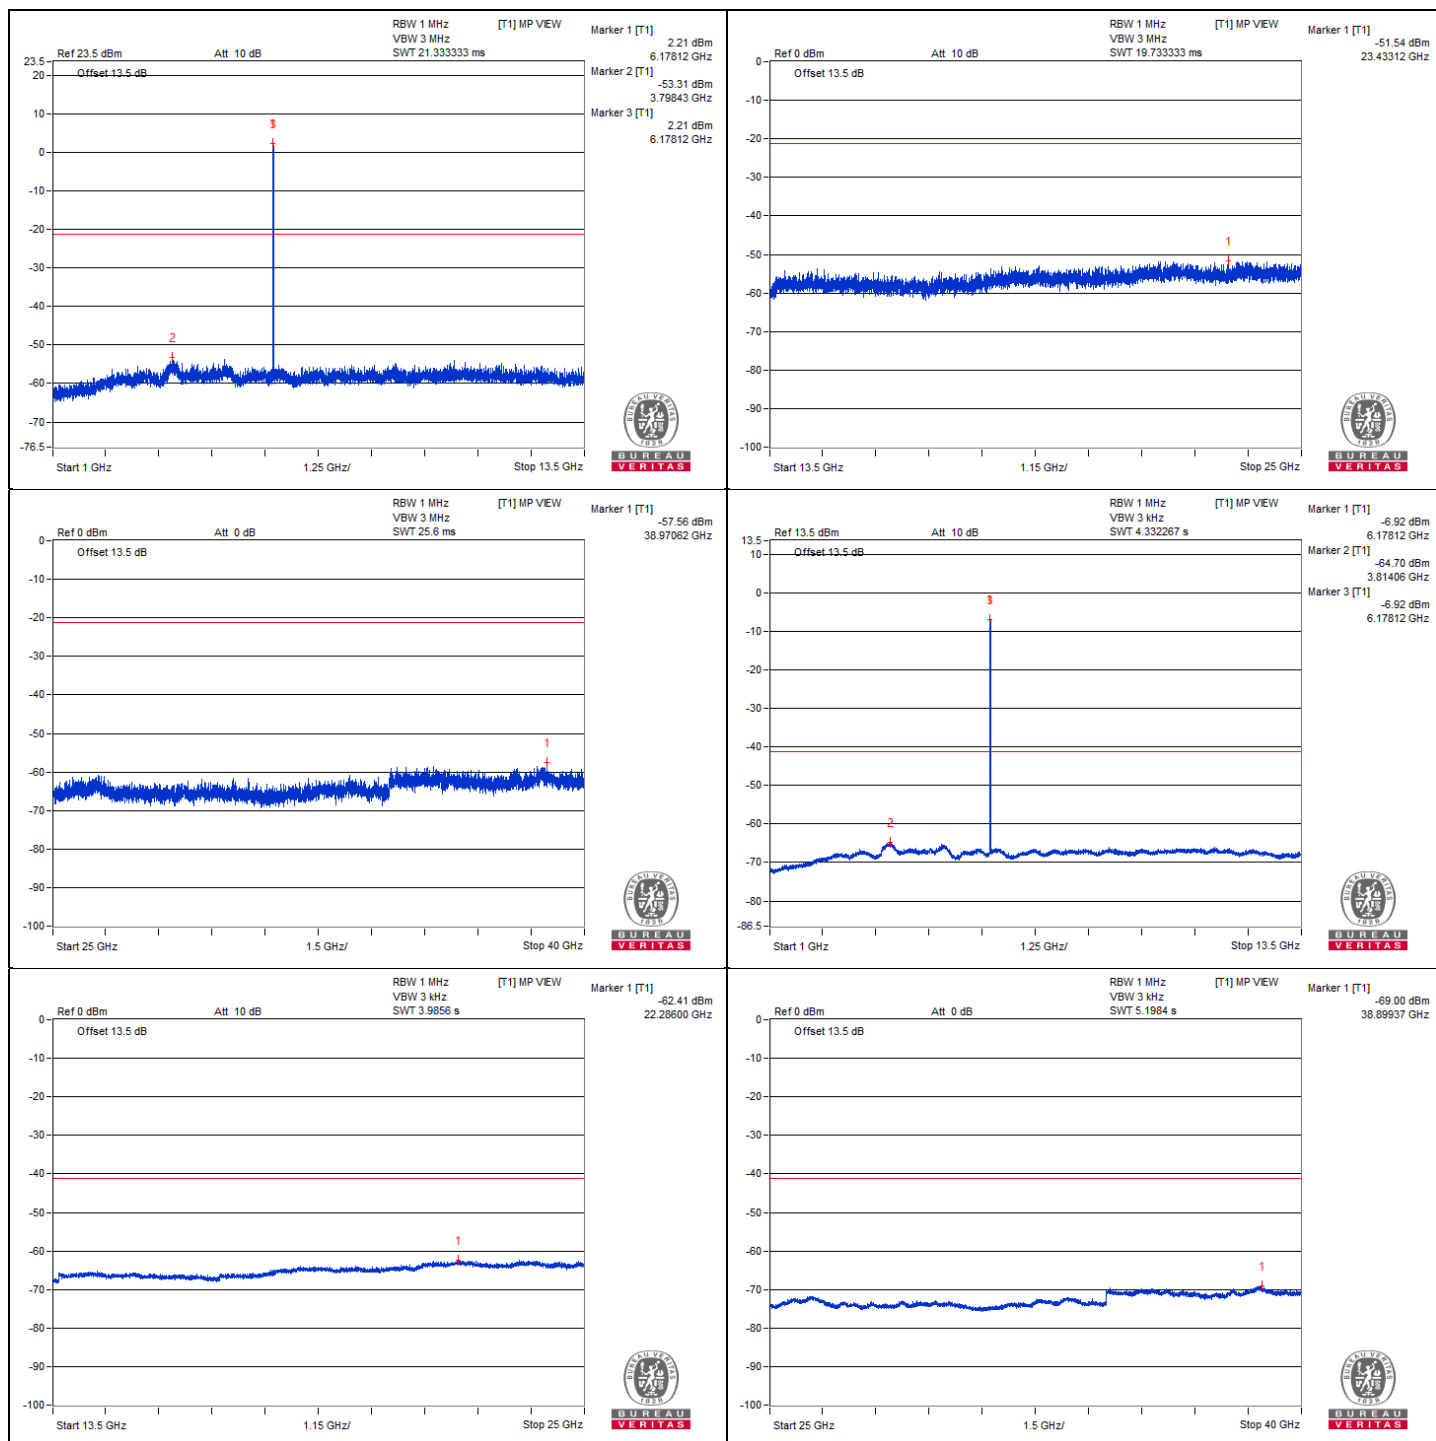


20 MHz Preamble 802.11ax (RU52) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12835.93	42.64 PK	88.2	-45.56	-57.38	4.76	-52.62
2	#12839.06	32.41 AV	68.2	-35.79	-67.61	4.76	-62.85
3	19244.25	45.64 PK	74	-28.36	-54.38	4.76	-49.62
4	19239.93	35.92 AV	54	-18.08	-64.1	4.76	-59.34

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

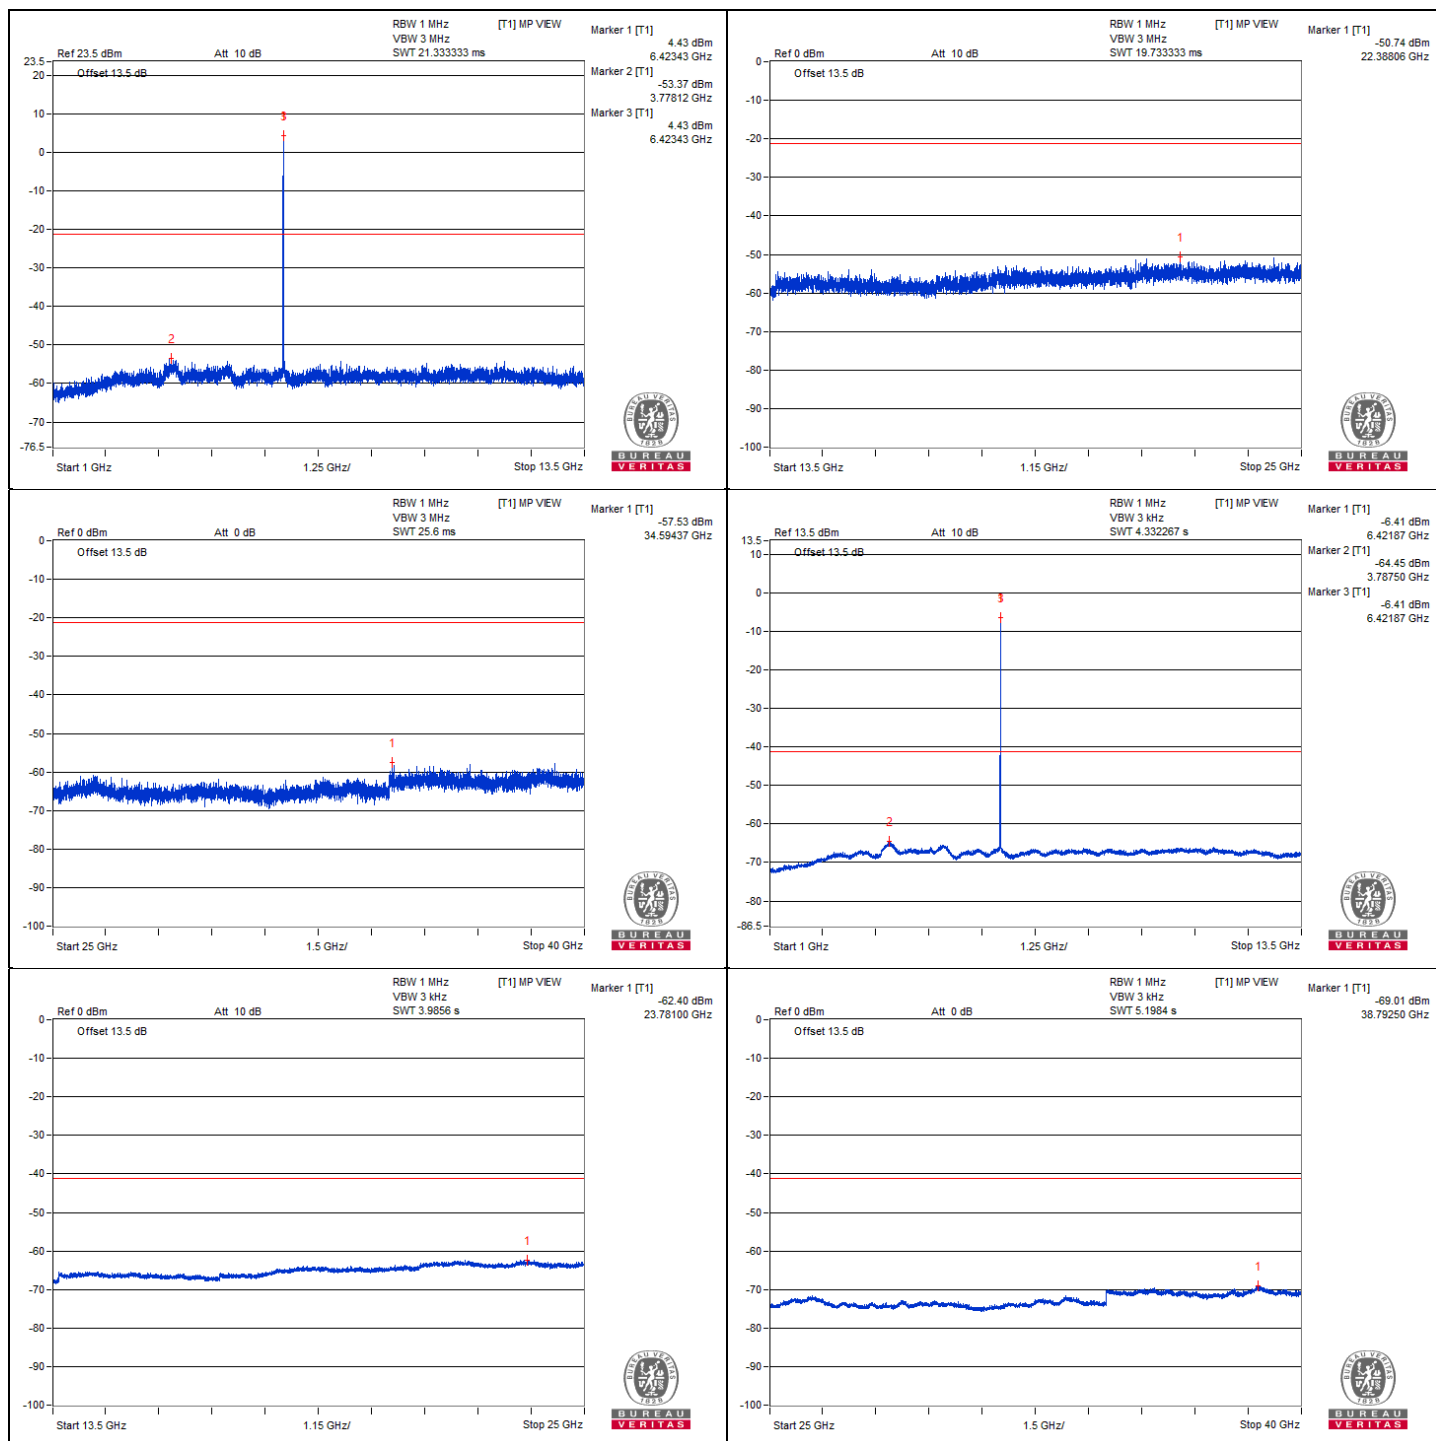


20 MHz Preamble 802.11ax (RU52) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12878.12	44.12 PK	88.2	-44.08	-55.9	4.76	-51.14
2	#12865.62	32.05 AV	68.2	-36.15	-67.97	4.76	-63.21
3	19296	45.14 PK	74	-28.86	-54.88	4.76	-50.12
4	19308.93	35.97 AV	54	-18.03	-64.05	4.76	-59.29

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

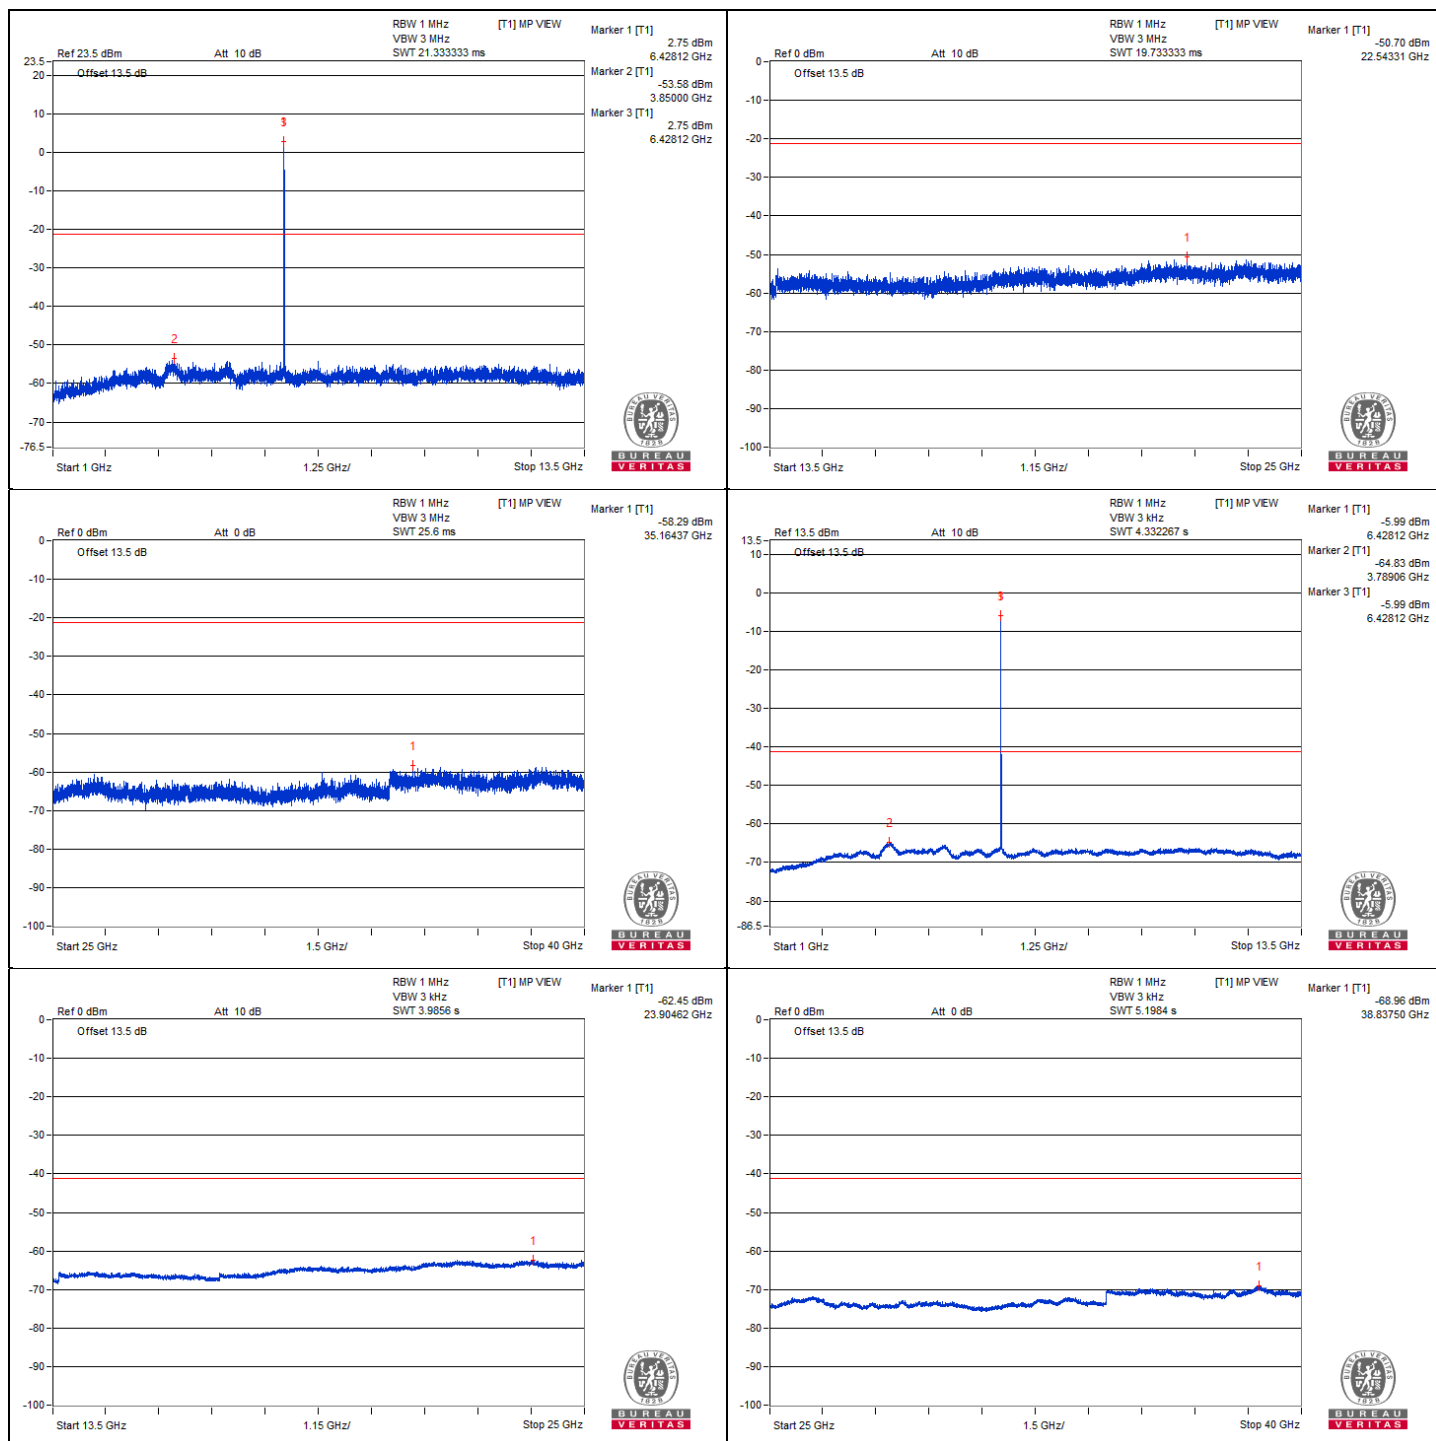







20 MHz Preamble 802.11ax (RU52) - Channel 105

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12951.56	42.9 PK	88.2	-45.3	-57.12	4.76	-52.36
2	#12945.31	31.69 AV	68.2	-36.51	-68.33	4.76	-63.57
3	19416.75	45.5 PK	74	-28.5	-54.52	4.76	-49.76
4	19431.12	35.56 AV	54	-18.44	-64.46	4.76	-59.70

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

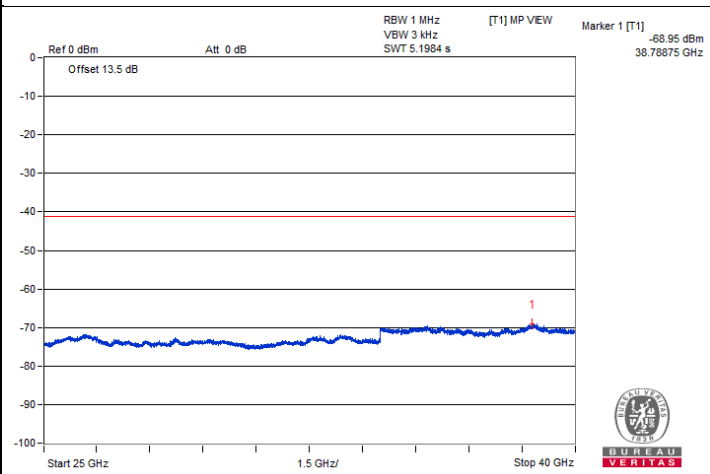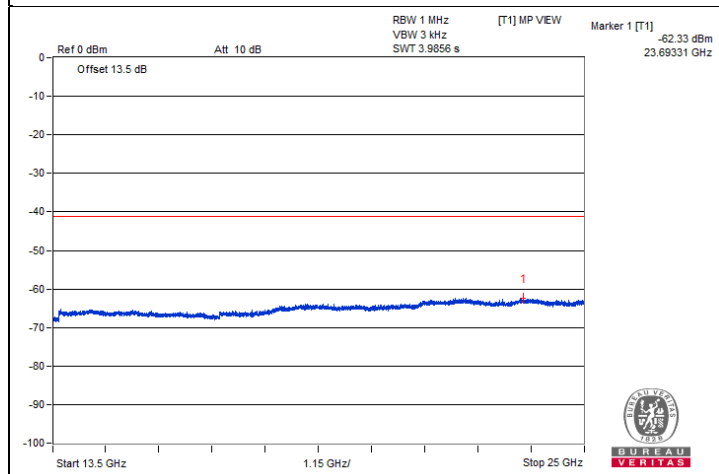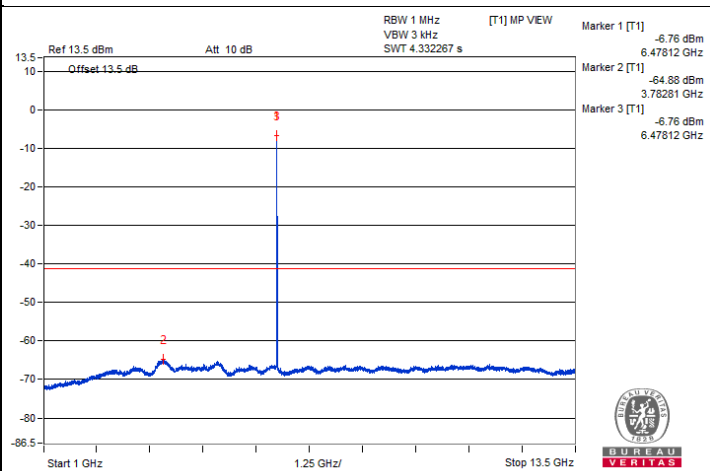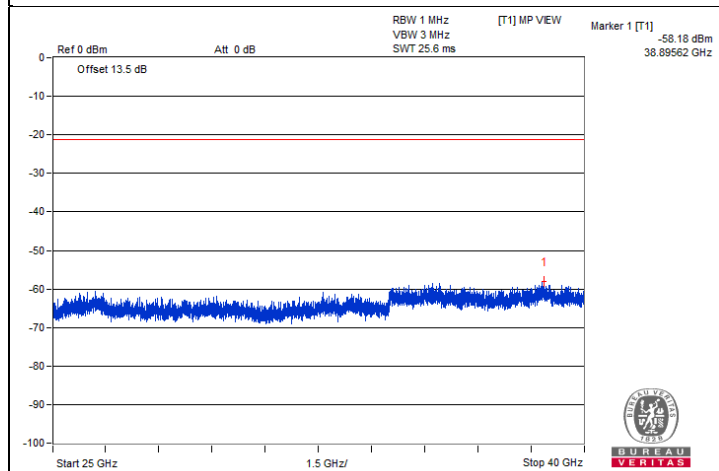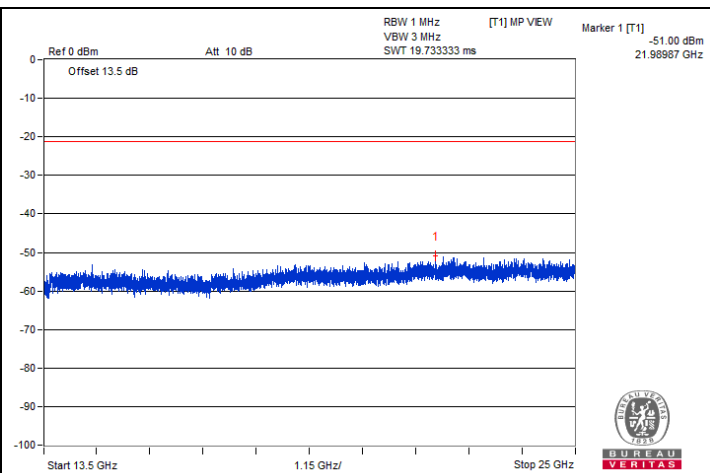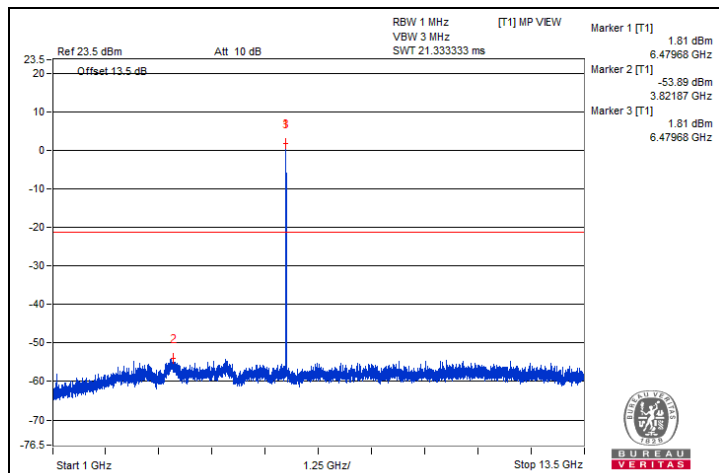


20 MHz Preamble 802.11ax (RU52) - Channel 113

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13023.43	41.75 PK	88.2	-46.45	-58.27	4.76	-53.51
2	#13032.81	32.05 AV	68.2	-36.15	-67.97	4.76	-63.21
3	19543.25	46.08 PK	74	-27.92	-53.94	4.76	-49.18
4	19550.43	35.42 AV	54	-18.58	-64.6	4.76	-59.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

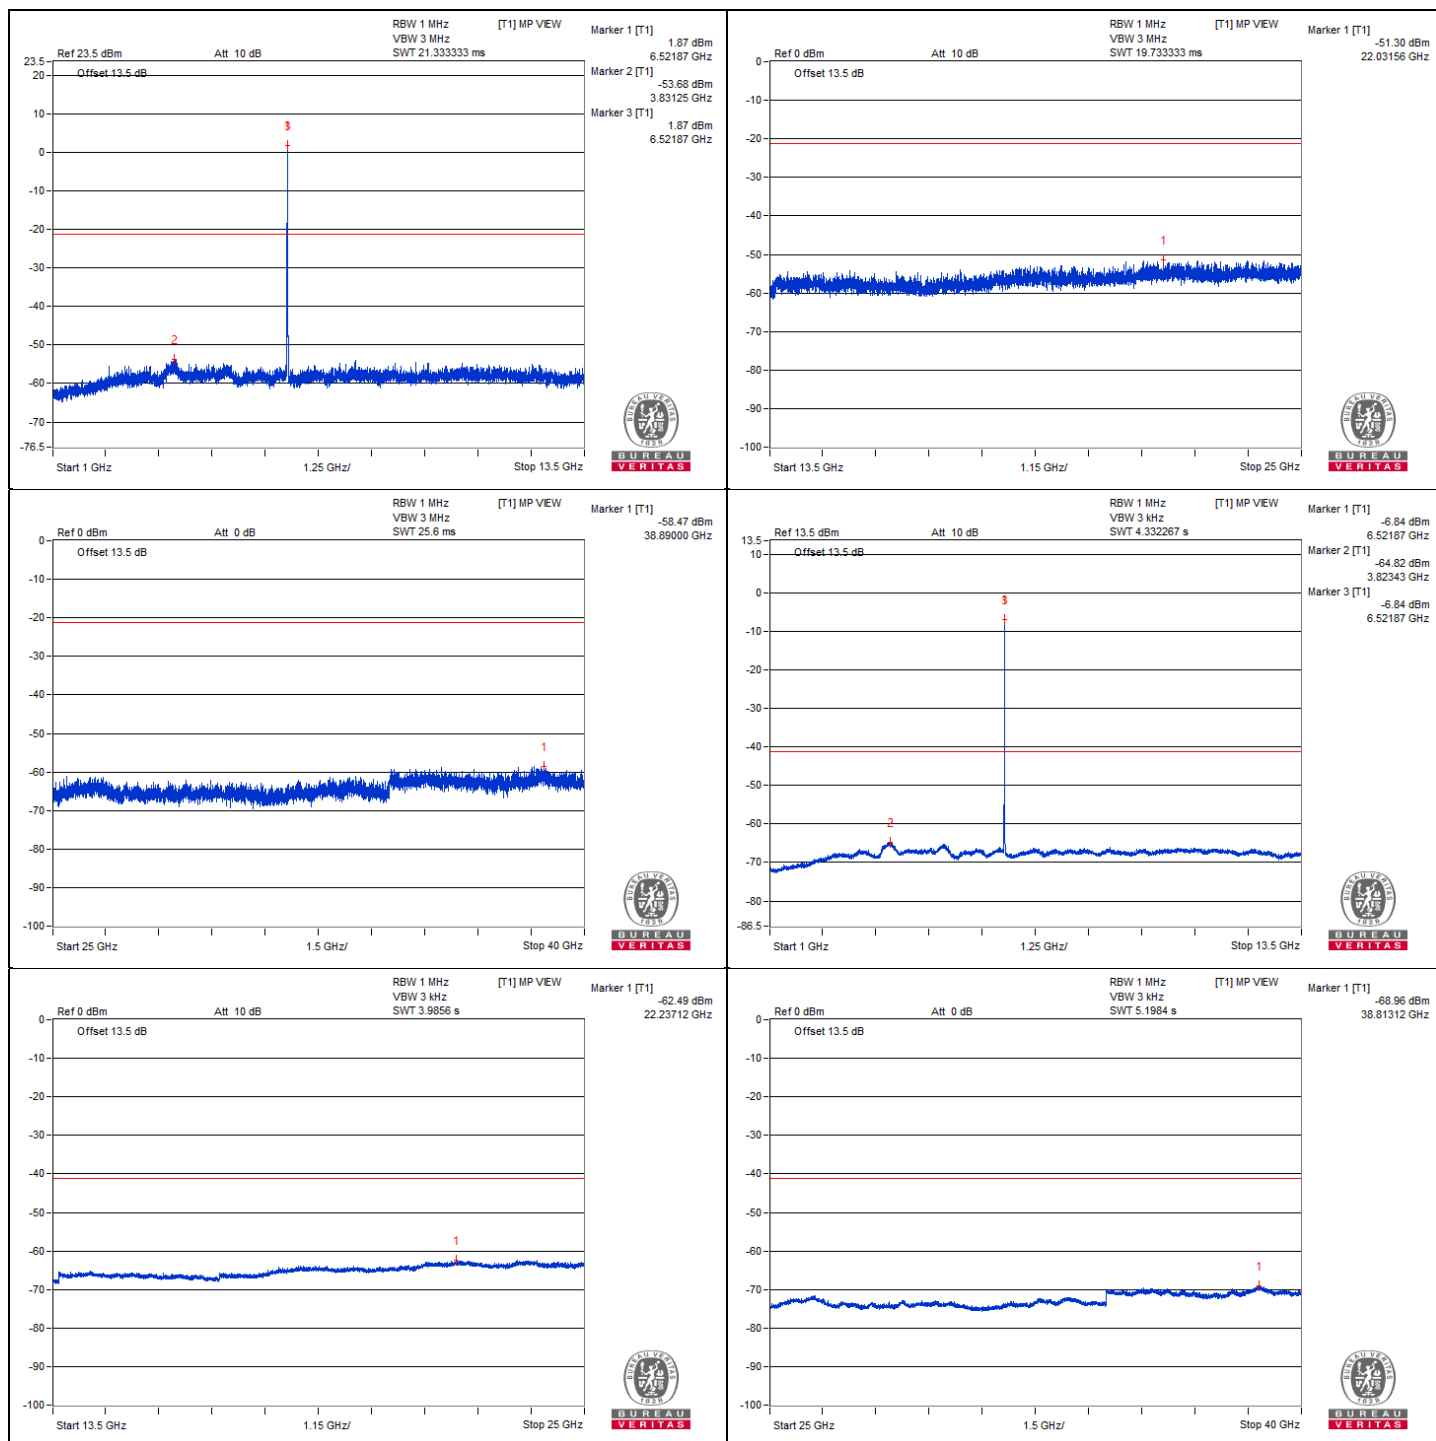


20 MHz Preamble 802.11ax (RU52) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13067.18	42.88 PK	88.2	-45.32	-57.14	4.76	-52.38
2	#13078.12	31.95 AV	68.2	-36.25	-68.07	4.76	-63.31
3	19599.31	44.92 PK	74	-29.08	-55.1	4.76	-50.34
4	19606.5	34.81 AV	54	-19.19	-65.21	4.76	-60.45

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

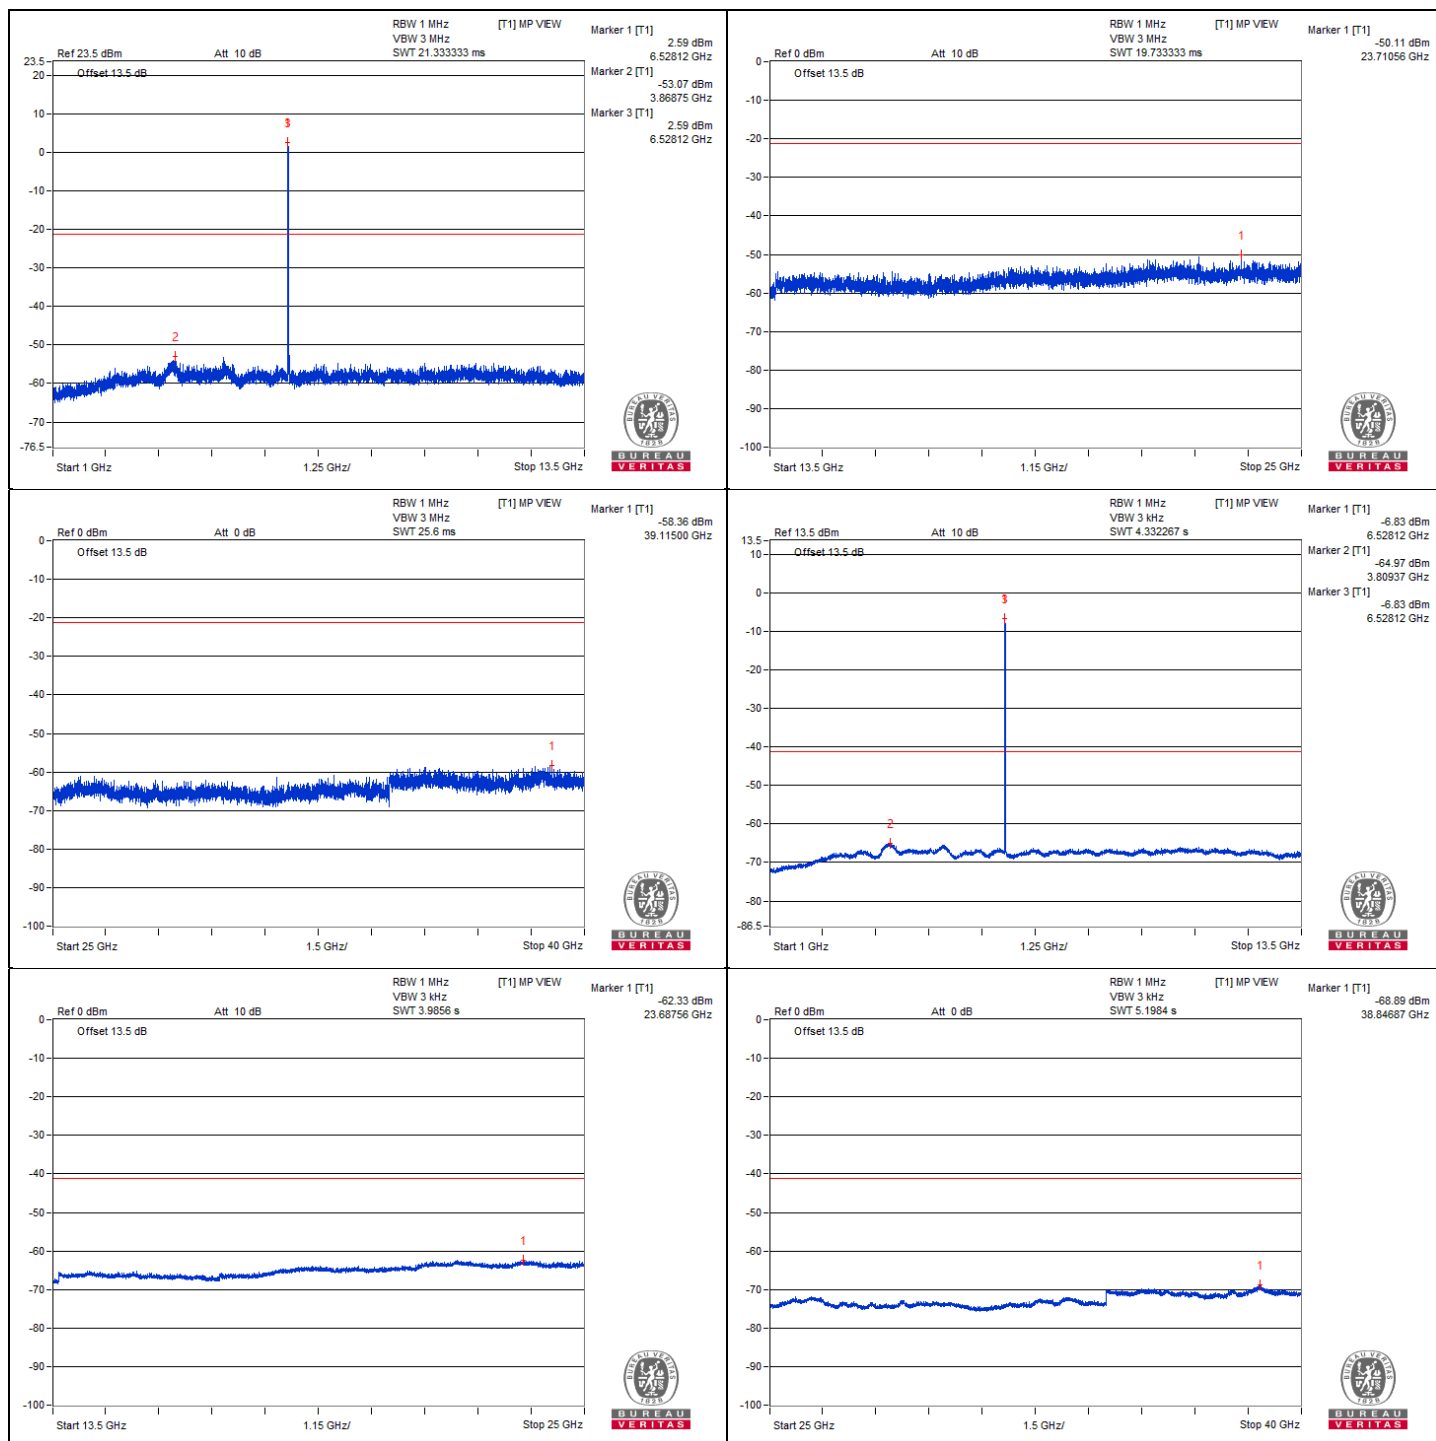


20 MHz Preamble 802.11ax (RU52) - Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13385.93	41.99 PK	74	-32.01	-58.03	4.76	-53.27
2	13400	32.09 AV	54	-21.91	-67.93	4.76	-63.17
3	20078	45.13 PK	74	-28.87	-54.89	4.76	-50.13
4	20093.81	35.57 AV	54	-18.43	-64.45	4.76	-59.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

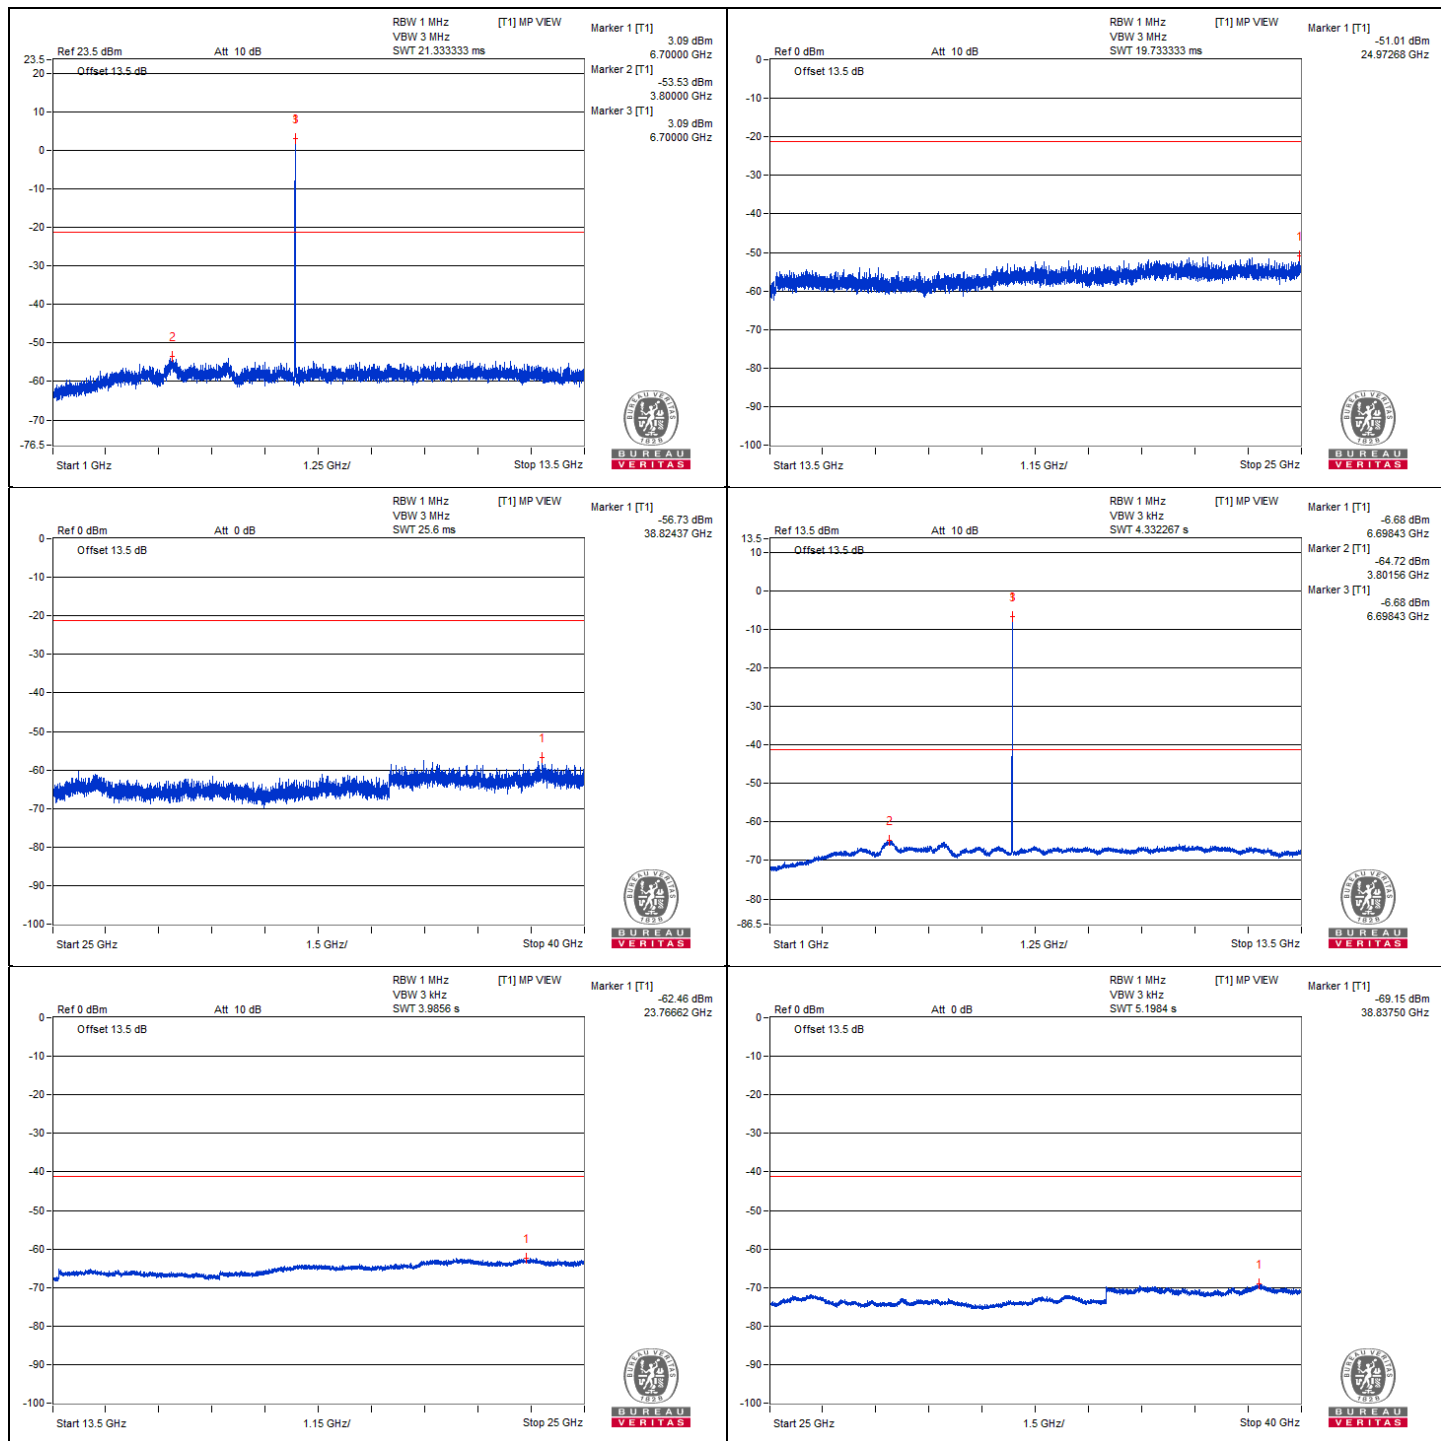


20 MHz Preamble 802.11ax (RU52) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13705.56	44 PK	88.2	-44.2	-56.02	4.76	-51.26
2	#13708.43	34.2 AV	68.2	-34	-65.82	4.76	-61.06
3	20566.75	45.82 PK	74	-28.18	-54.2	4.76	-49.44
4	20562.43	35.67 AV	54	-18.33	-64.35	4.76	-59.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

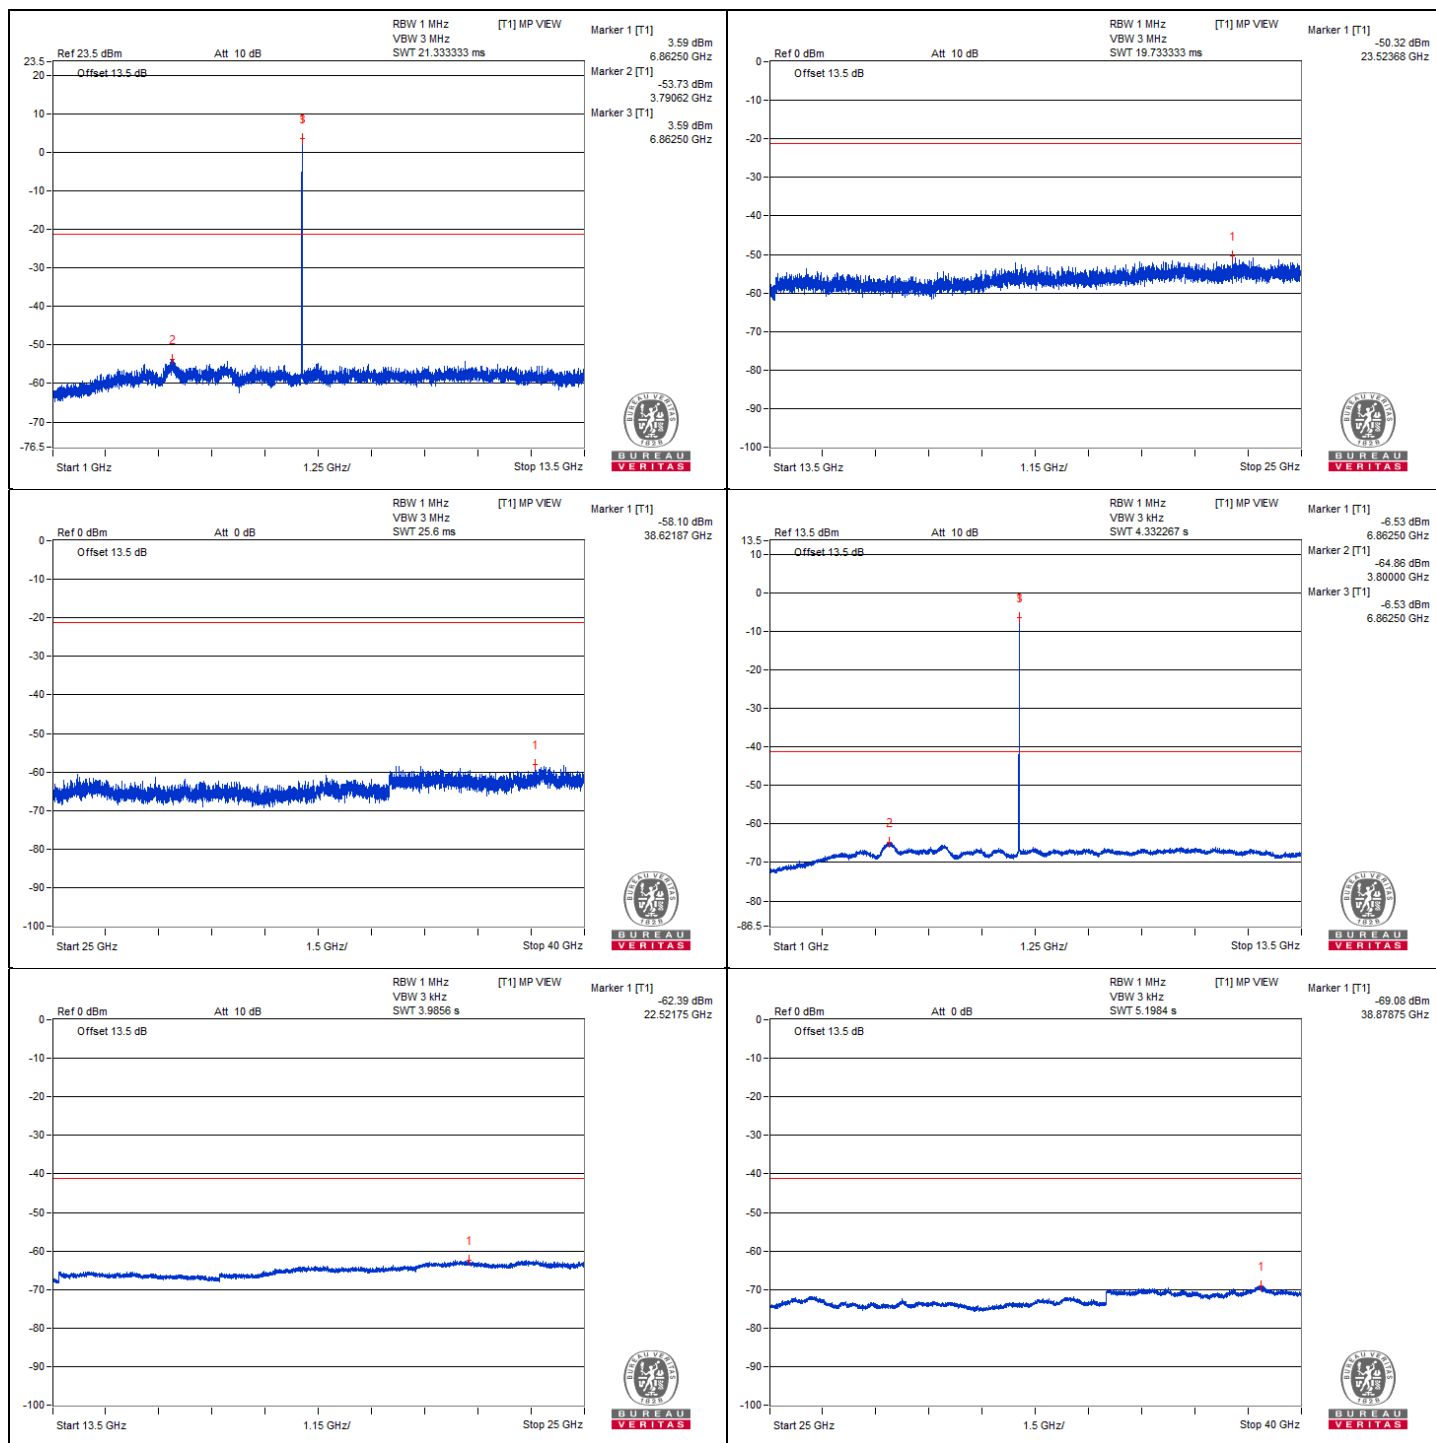


20 MHz Preamble 802.11ax (RU52) - Channel 185

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13758.75	43.76 PK	88.2	-44.44	-56.26	4.76	-51.50
2	#13754.43	34.12 AV	68.2	-34.08	-65.9	4.76	-61.14
3	20625.68	45.41 PK	74	-28.59	-54.61	4.76	-49.85
4	20621.37	35.45 AV	54	-18.55	-64.57	4.76	-59.81

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

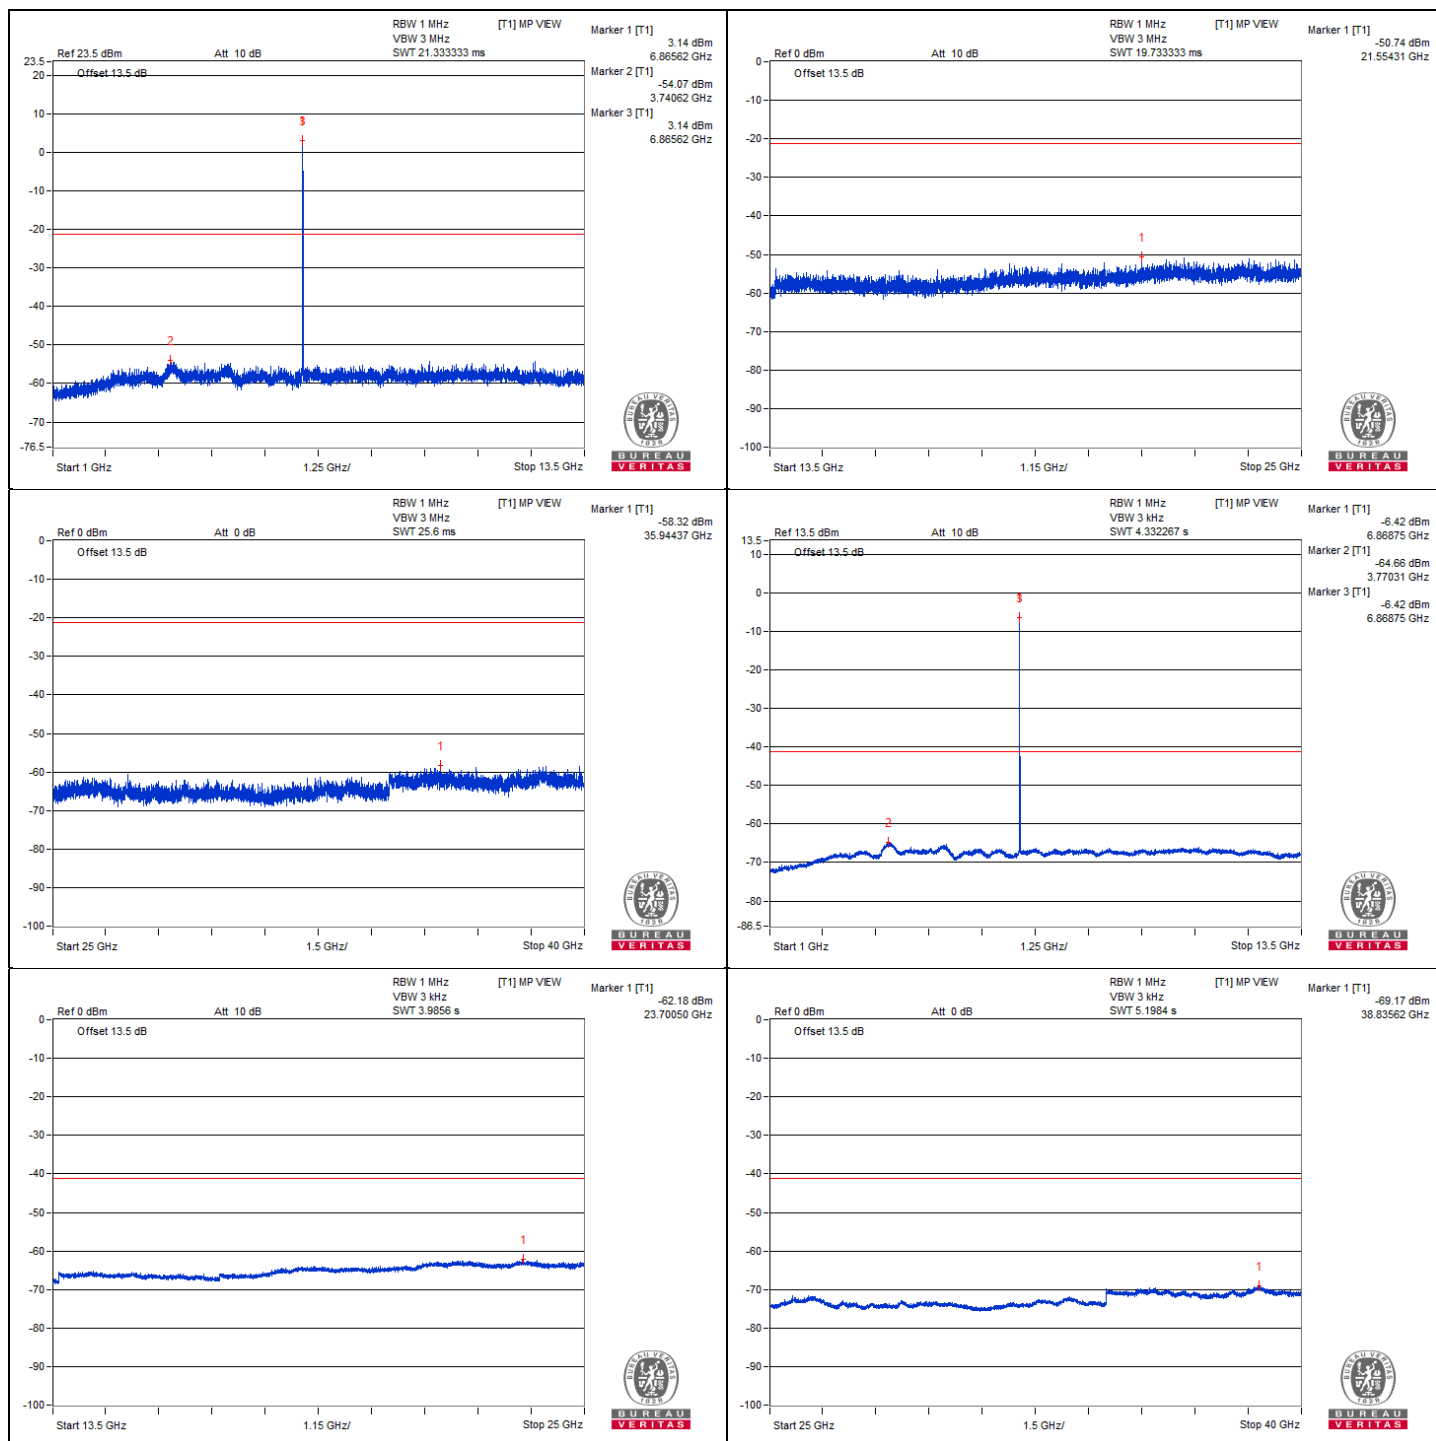


20 MHz Preamble 802.11ax (RU52) - Channel 209

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13998.81	42.83 PK	88.2	-45.37	-57.19	4.76	-52.43
2	#13987.31	33.84 AV	68.2	-34.36	-66.18	4.76	-61.42
3	20985.06	46 PK	74	-28	-54.02	4.76	-49.26
4	20986.5	35.85 AV	54	-18.15	-64.17	4.76	-59.41

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

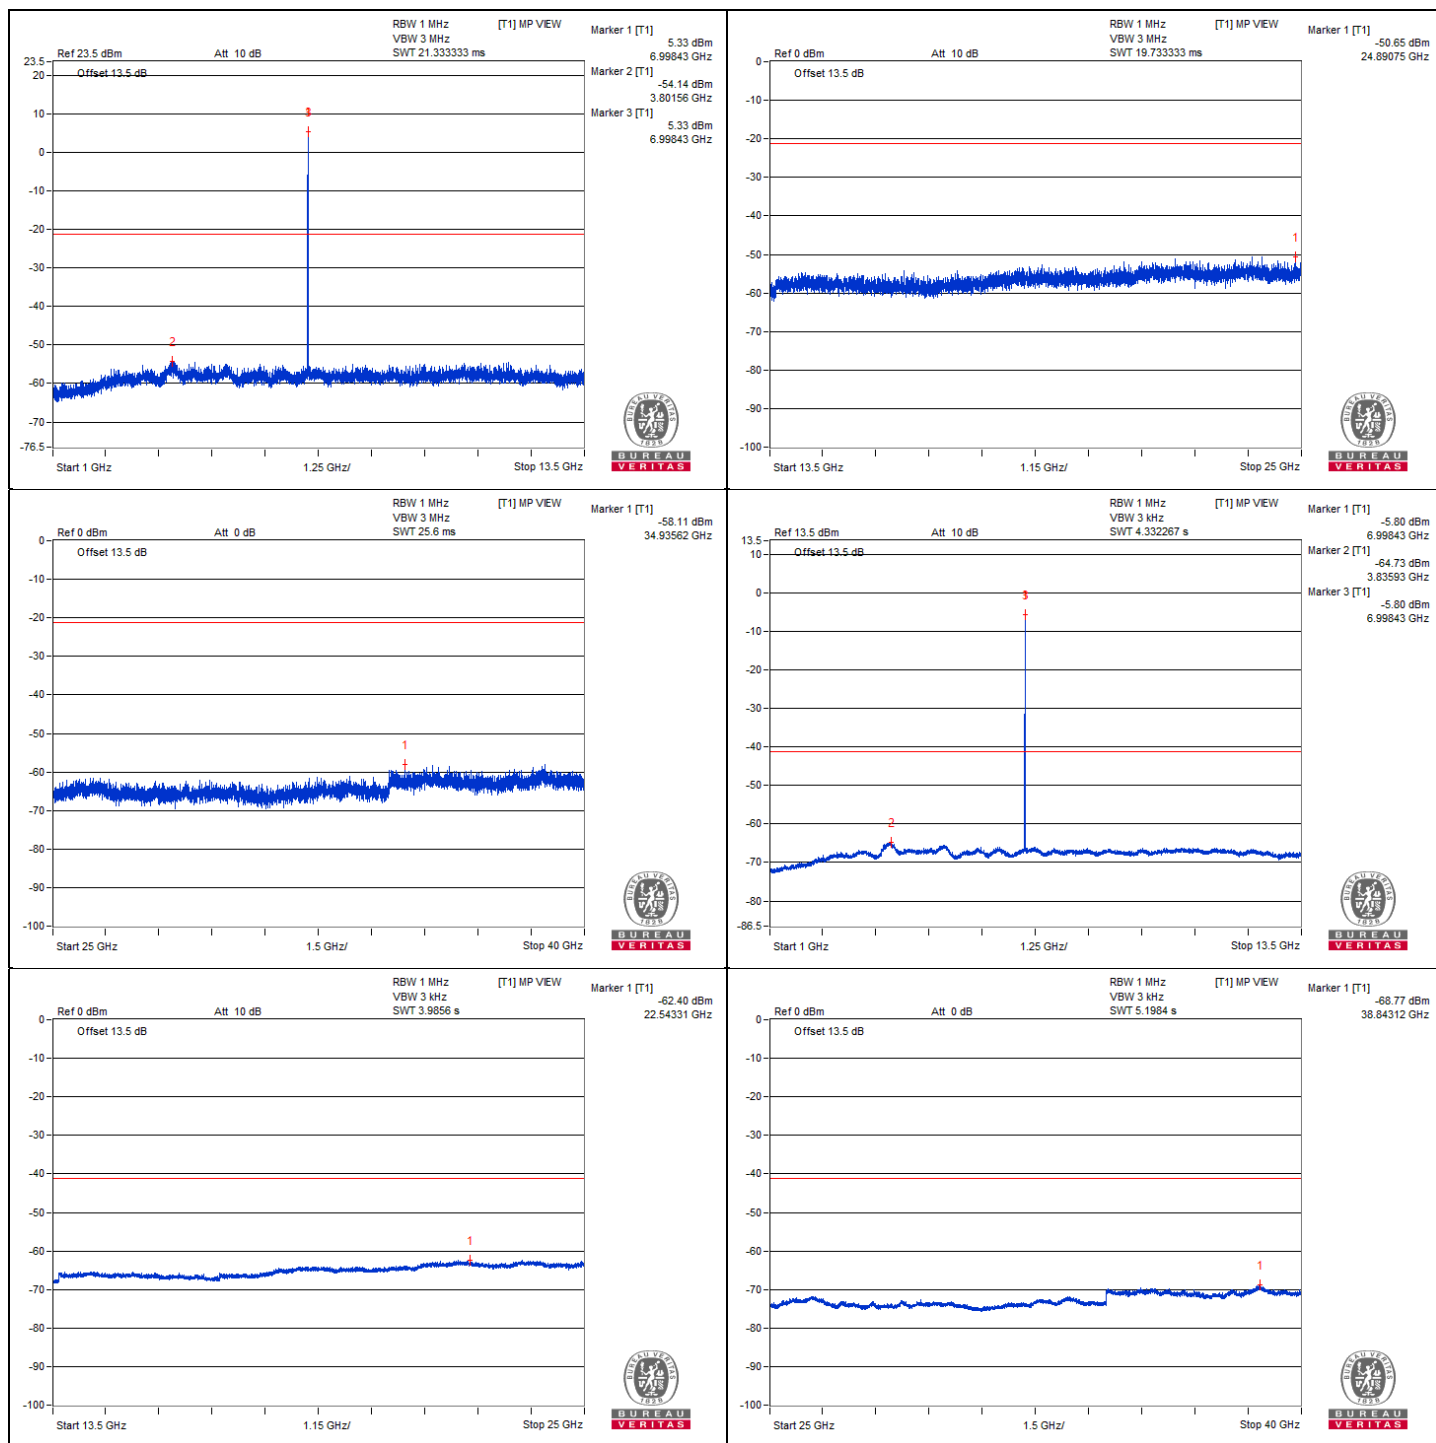


20 MHz Preamble 802.11ax (RU52) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14243.18	44.6 PK	88.2	-43.6	-55.42	4.76	-50.66
2	#14244.62	34.94 AV	68.2	-33.26	-65.08	4.76	-60.32
3	21327.18	45.72 PK	74	-28.28	-54.3	4.76	-49.54
4	21354.5	35.67 AV	54	-18.33	-64.35	4.76	-59.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

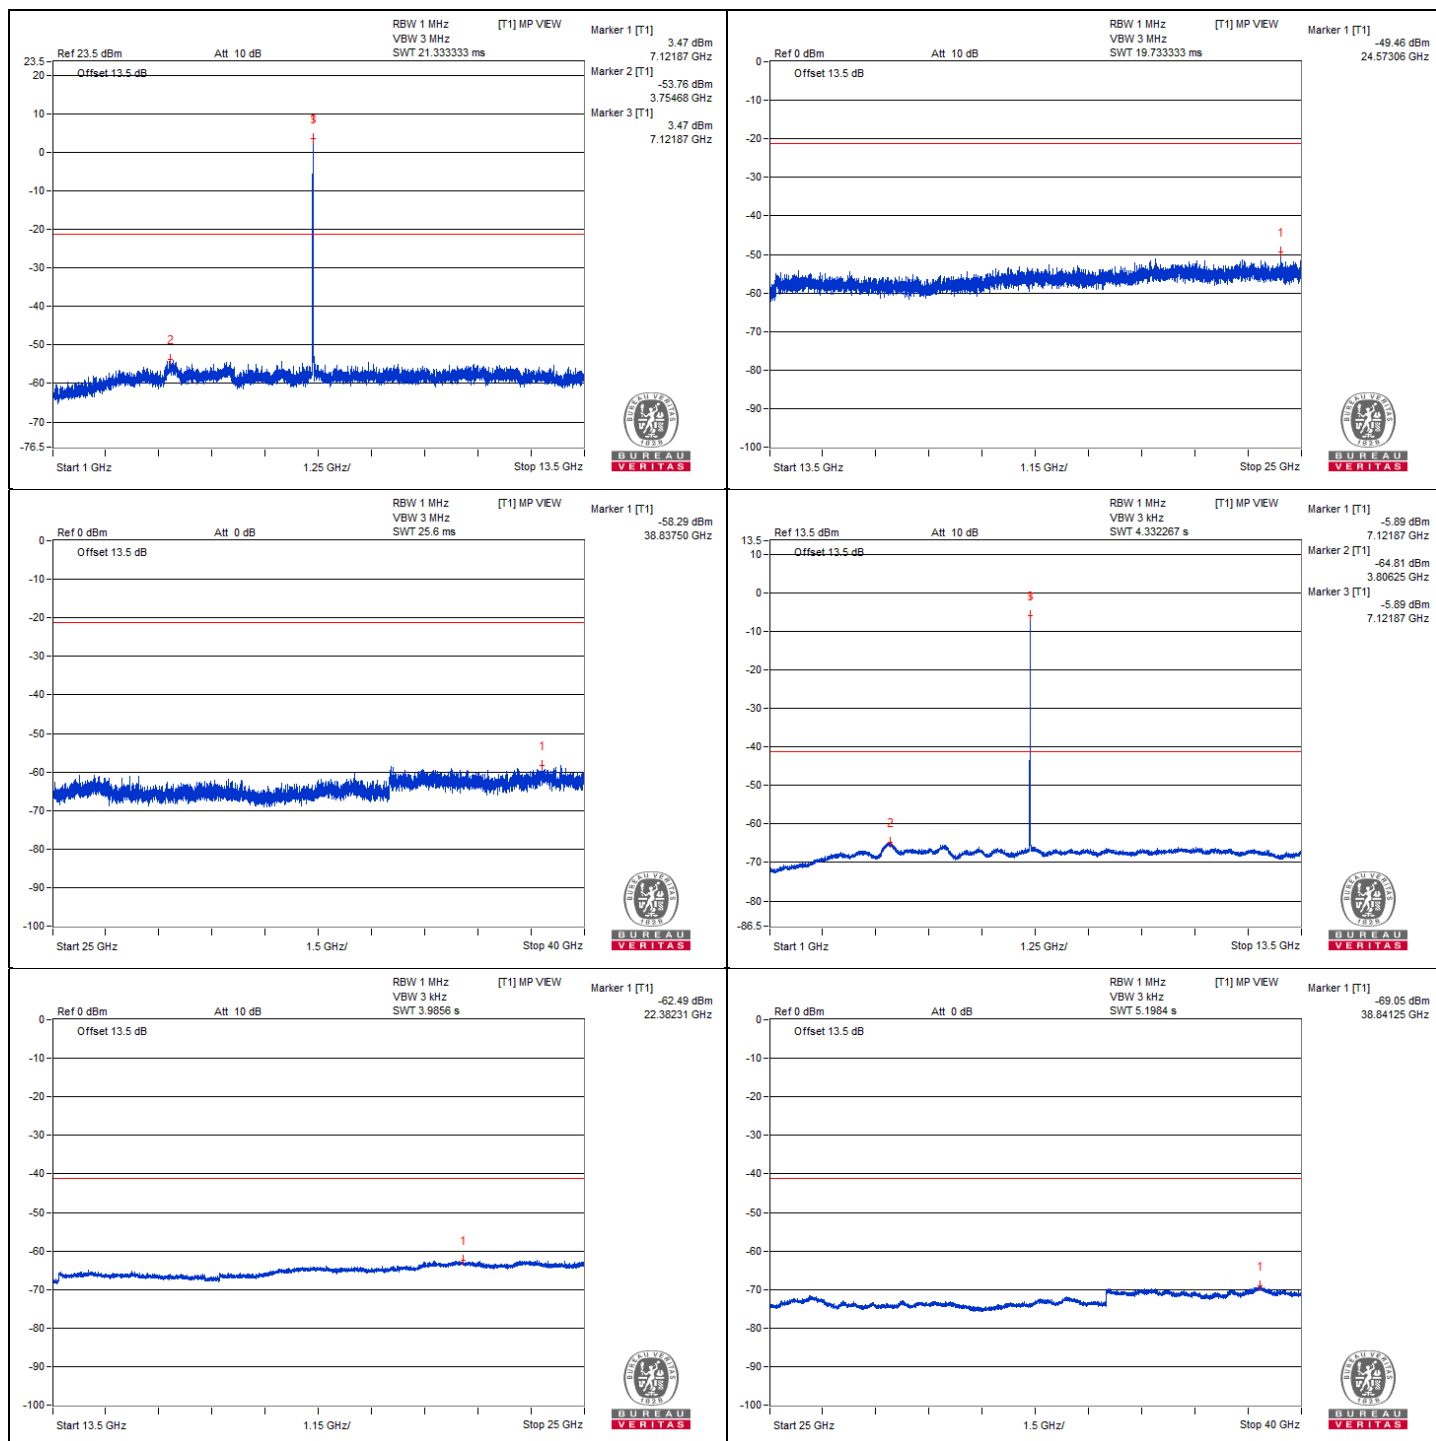


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	62.99 PK	88.2	-25.21	-36.36	4.09	-32.27
2	#7125	48.54 AV	68.2	-19.66	-50.81	4.09	-46.72

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

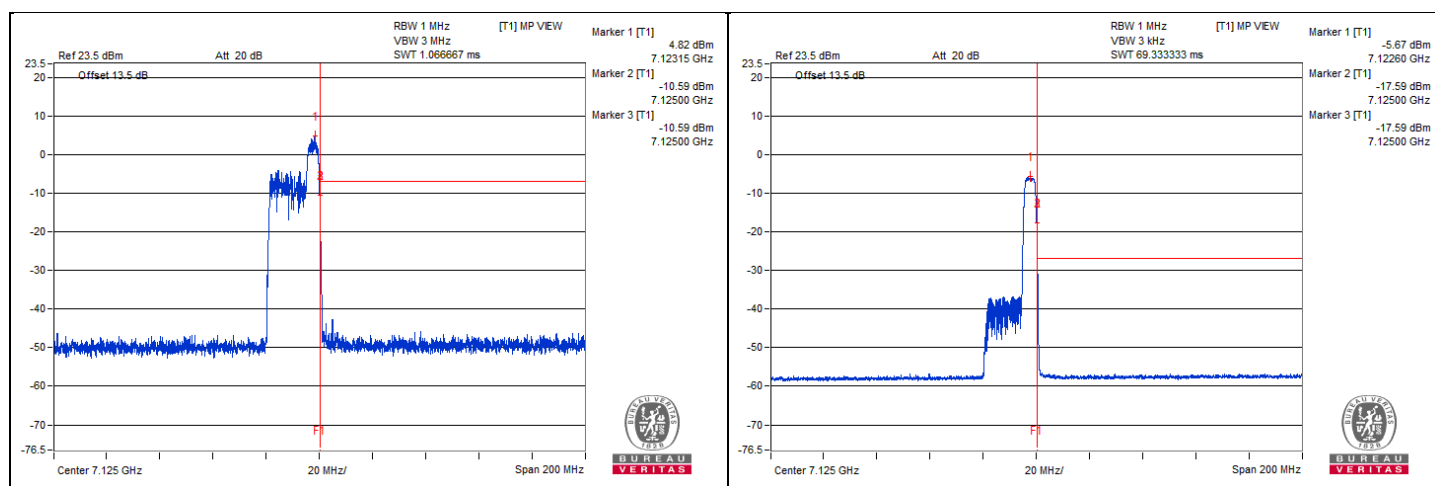







20 MHz Preamble 802.11ax (RU106) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11904.68	43.97 PK	74	-30.03	-56.05	4.76	-51.29
2	11903.12	33.18 AV	54	-20.82	-66.84	4.76	-62.08
3	17872.87	43.69 PK	74	-30.31	-56.33	4.76	-51.57
4	17868.56	33.78 AV	54	-20.22	-66.24	4.76	-61.48

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

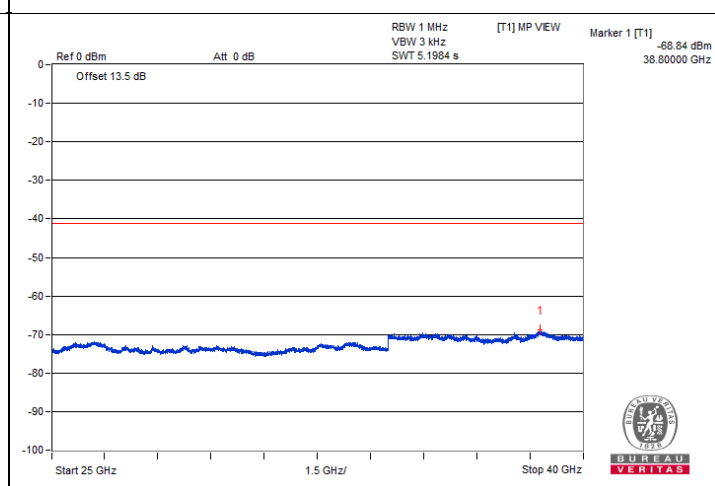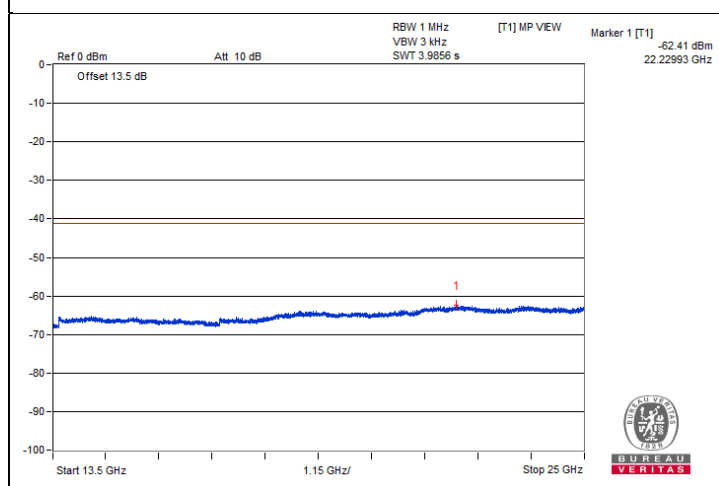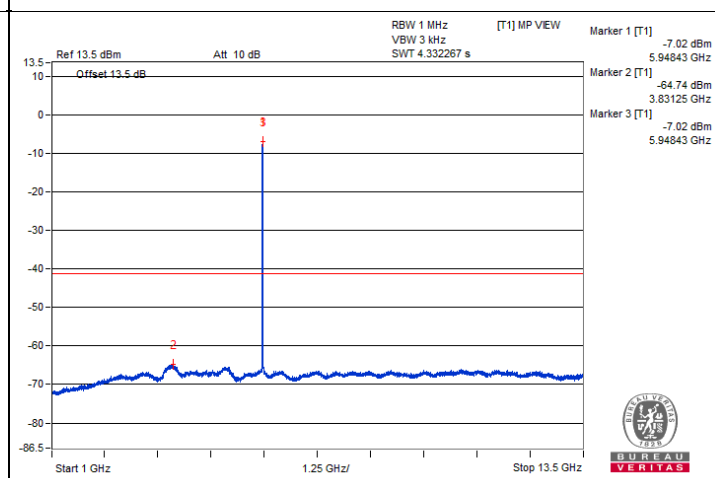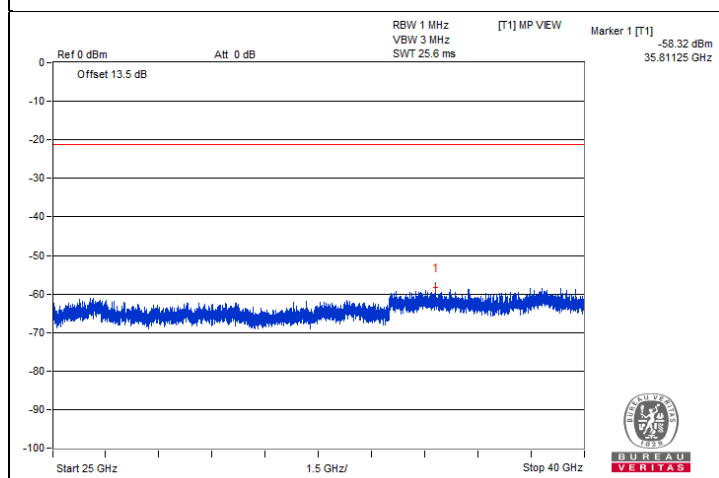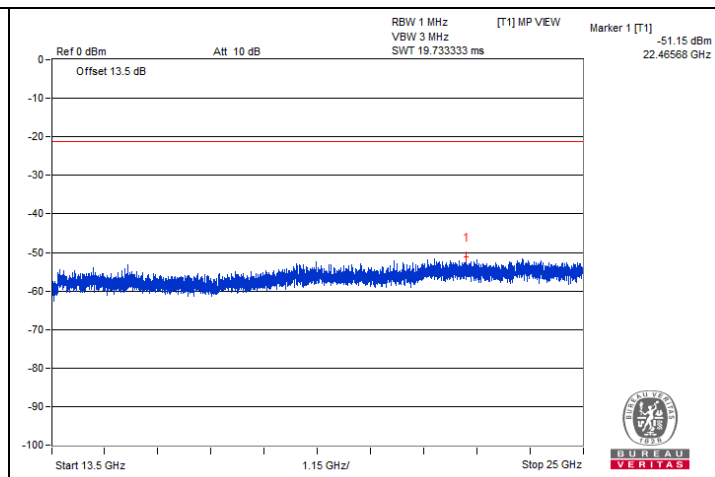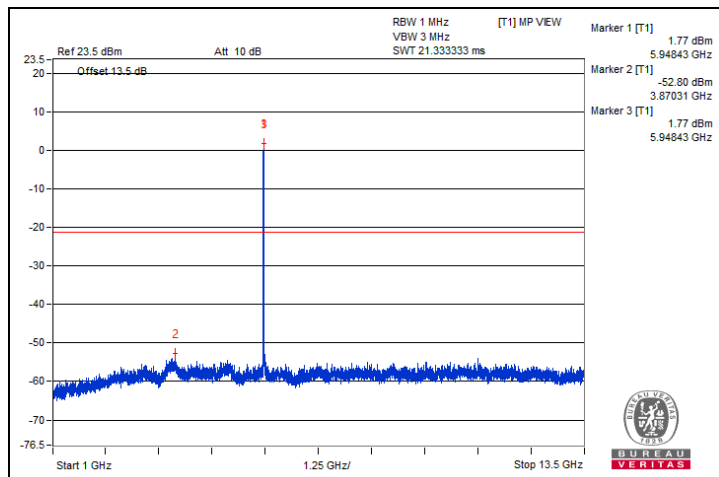


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5924.65	54.85 PK	88.2	-33.35	-45.17	4.76	-40.41
2	#5885.9	43.43 AV	68.2	-24.77	-56.59	4.76	-51.83

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

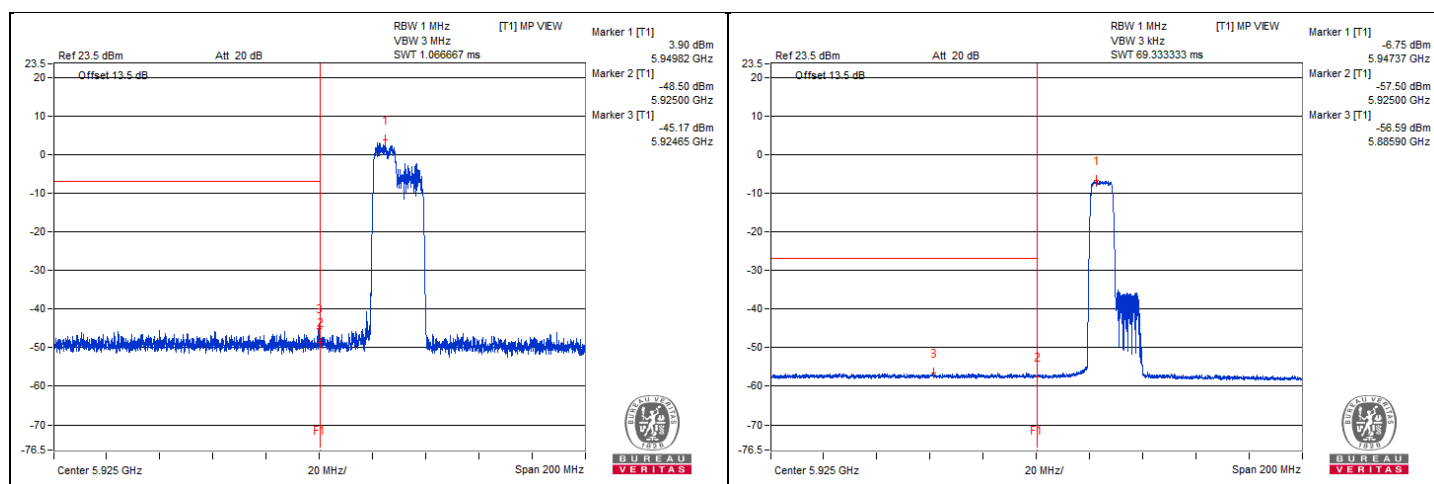


20 MHz Preamble 802.11ax (RU106) - Channel 45

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12350	43.27 PK	74	-30.73	-56.75	4.76	-51.99
2	12346.87	33.66 AV	54	-20.34	-66.36	4.76	-61.60
3	18534.12	44.27 PK	74	-29.73	-55.75	4.76	-50.99
4	18518.31	34.97 AV	54	-19.03	-65.05	4.76	-60.29

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

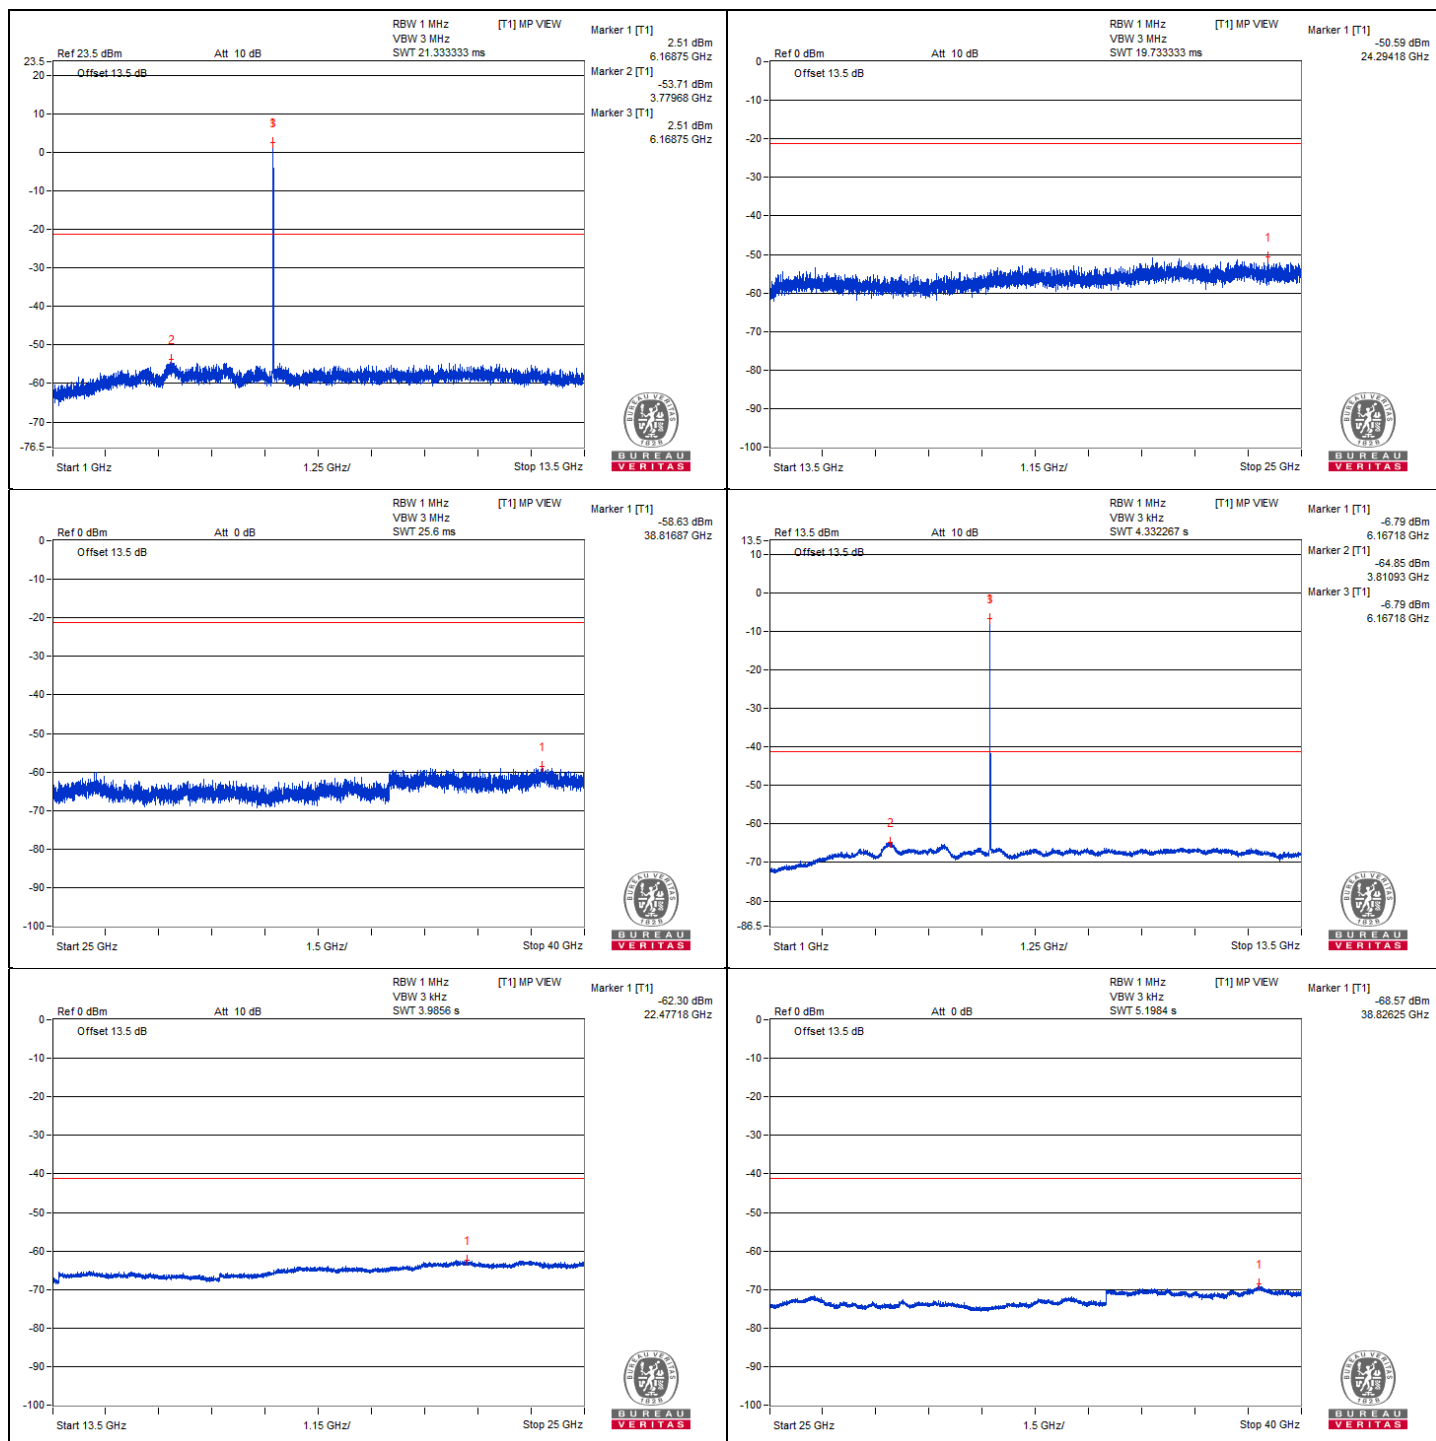


20 MHz Preamble 802.11ax (RU106) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12832.81	43.76 PK	88.2	-44.44	-56.26	4.76	-51.50
2	#12820.31	32.24 AV	68.2	-35.96	-67.78	4.76	-63.02
3	19242.81	46.56 PK	74	-27.44	-53.46	4.76	-48.70
4	19247.12	35.85 AV	54	-18.15	-64.17	4.76	-59.41

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

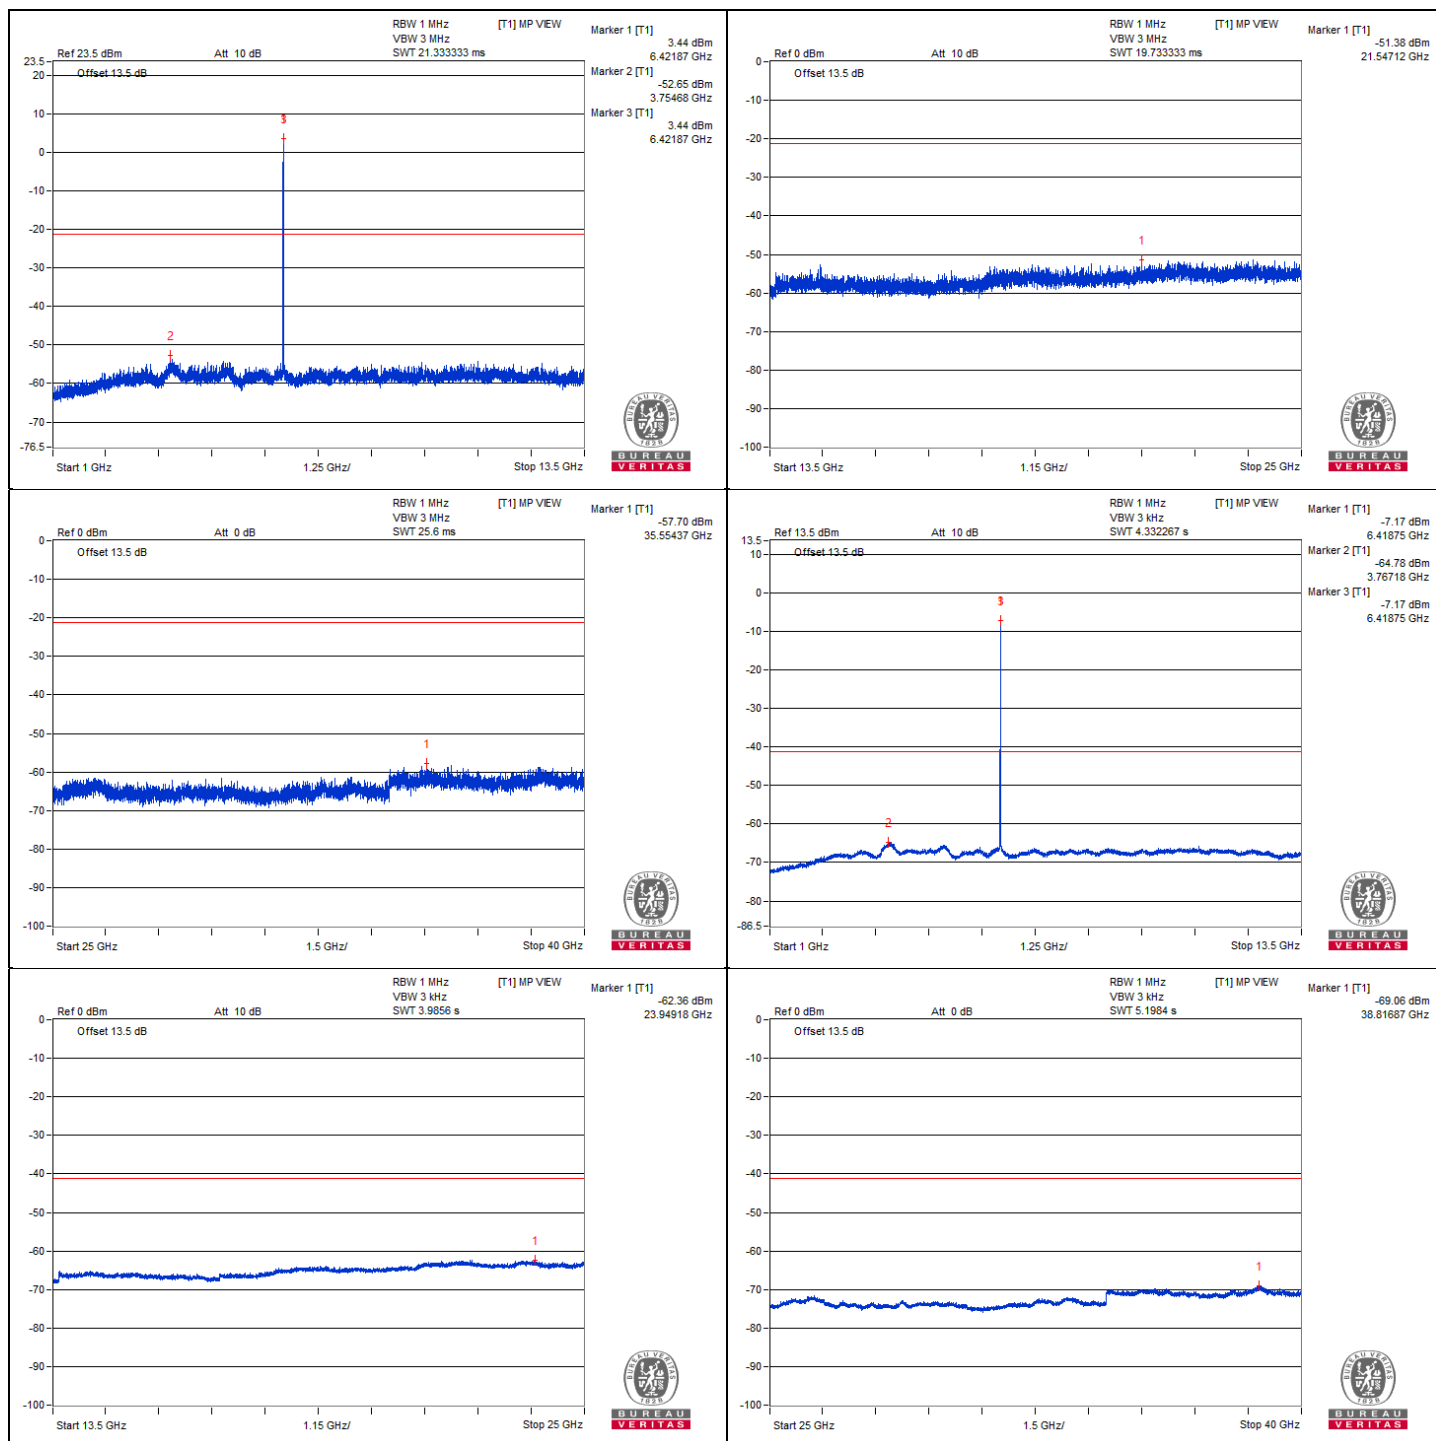


20 MHz Preamble 802.11ax (RU106) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12873.43	43.63 PK	88.2	-44.57	-56.39	4.76	-51.63
2	#12860.93	32.41 AV	68.2	-35.79	-67.61	4.76	-62.85
3	19314.68	47.29 PK	74	-26.71	-52.73	4.76	-47.97
4	19313.25	35.8 AV	54	-18.2	-64.22	4.76	-59.46

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

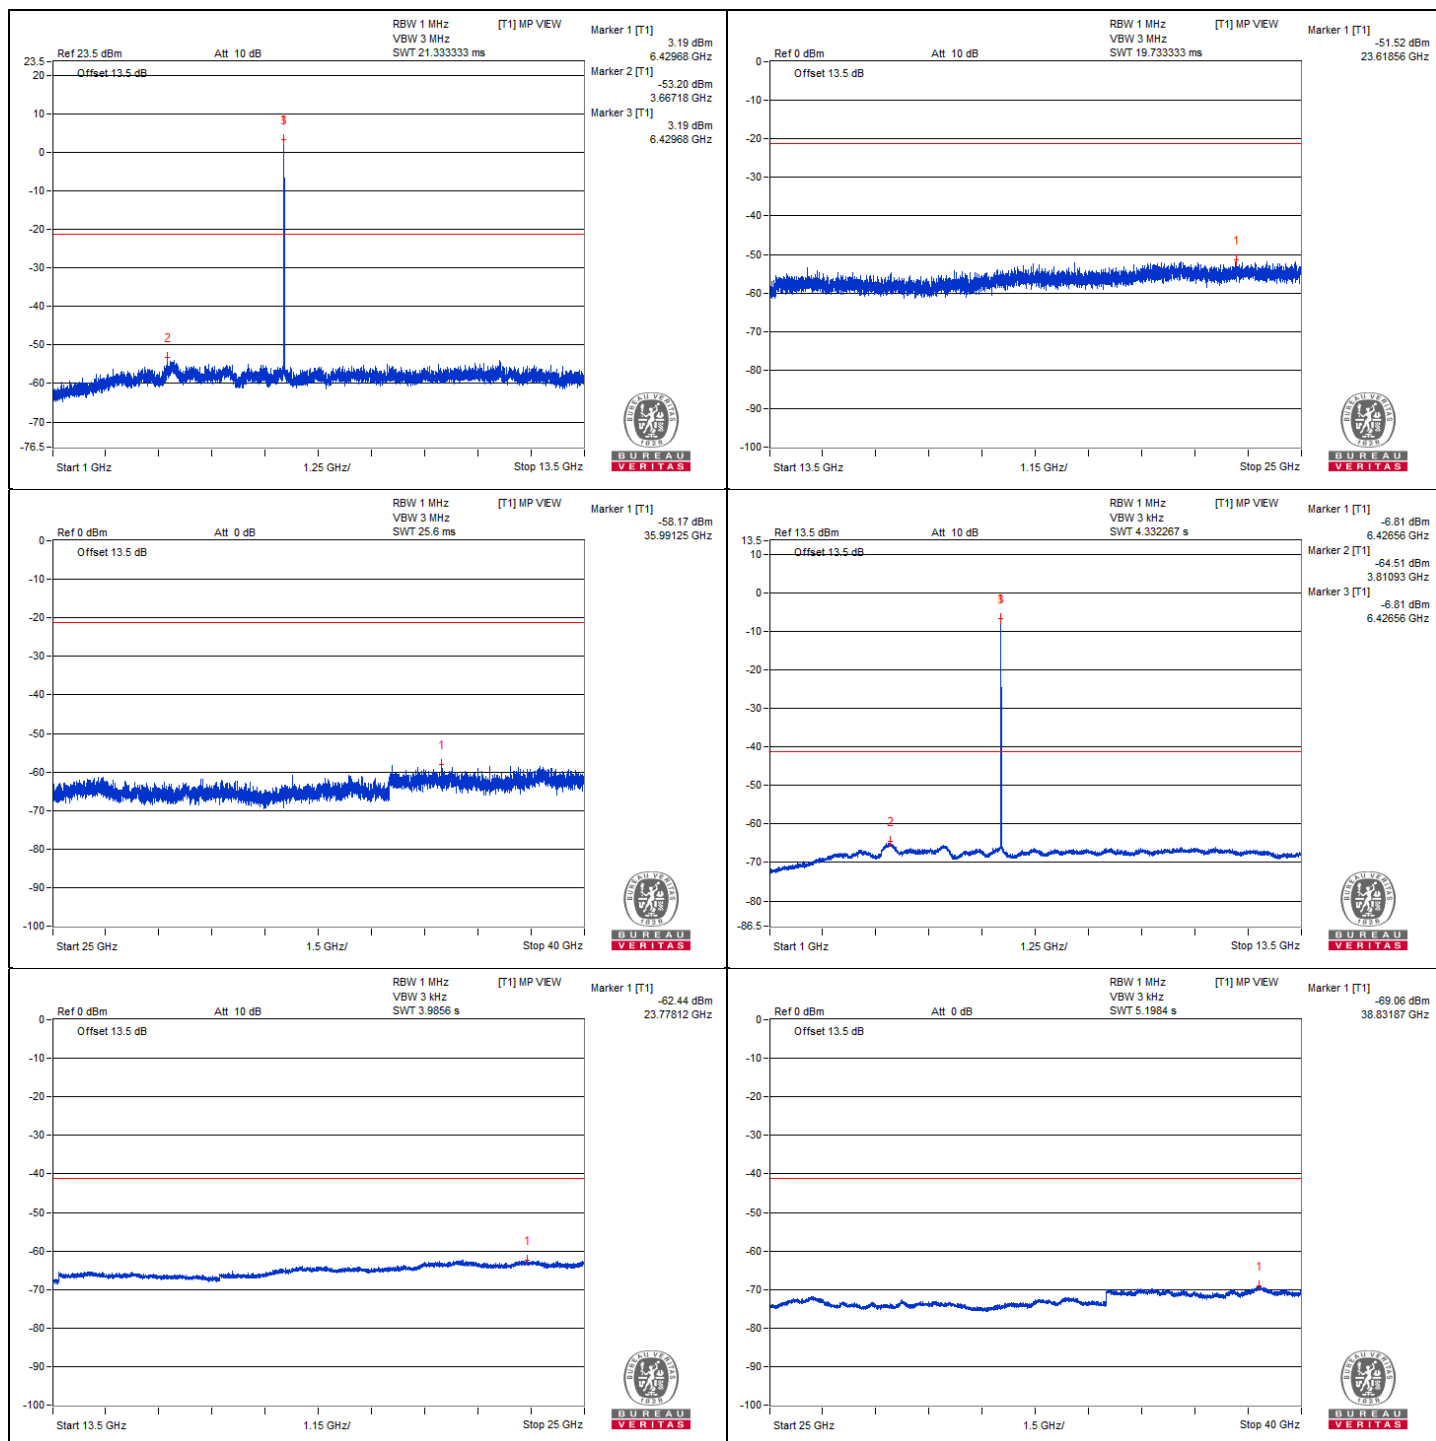


20 MHz Preamble 802.11ax (RU106) - Channel 105

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12951.56	43.04 PK	88.2	-45.16	-56.98	4.76	-52.22
2	#12946.87	31.96 AV	68.2	-36.24	-68.06	4.76	-63.30
3	19421.06	44.49 PK	74	-29.51	-55.53	4.76	-50.77
4	19428.25	35.35 AV	54	-18.65	-64.67	4.76	-59.91

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

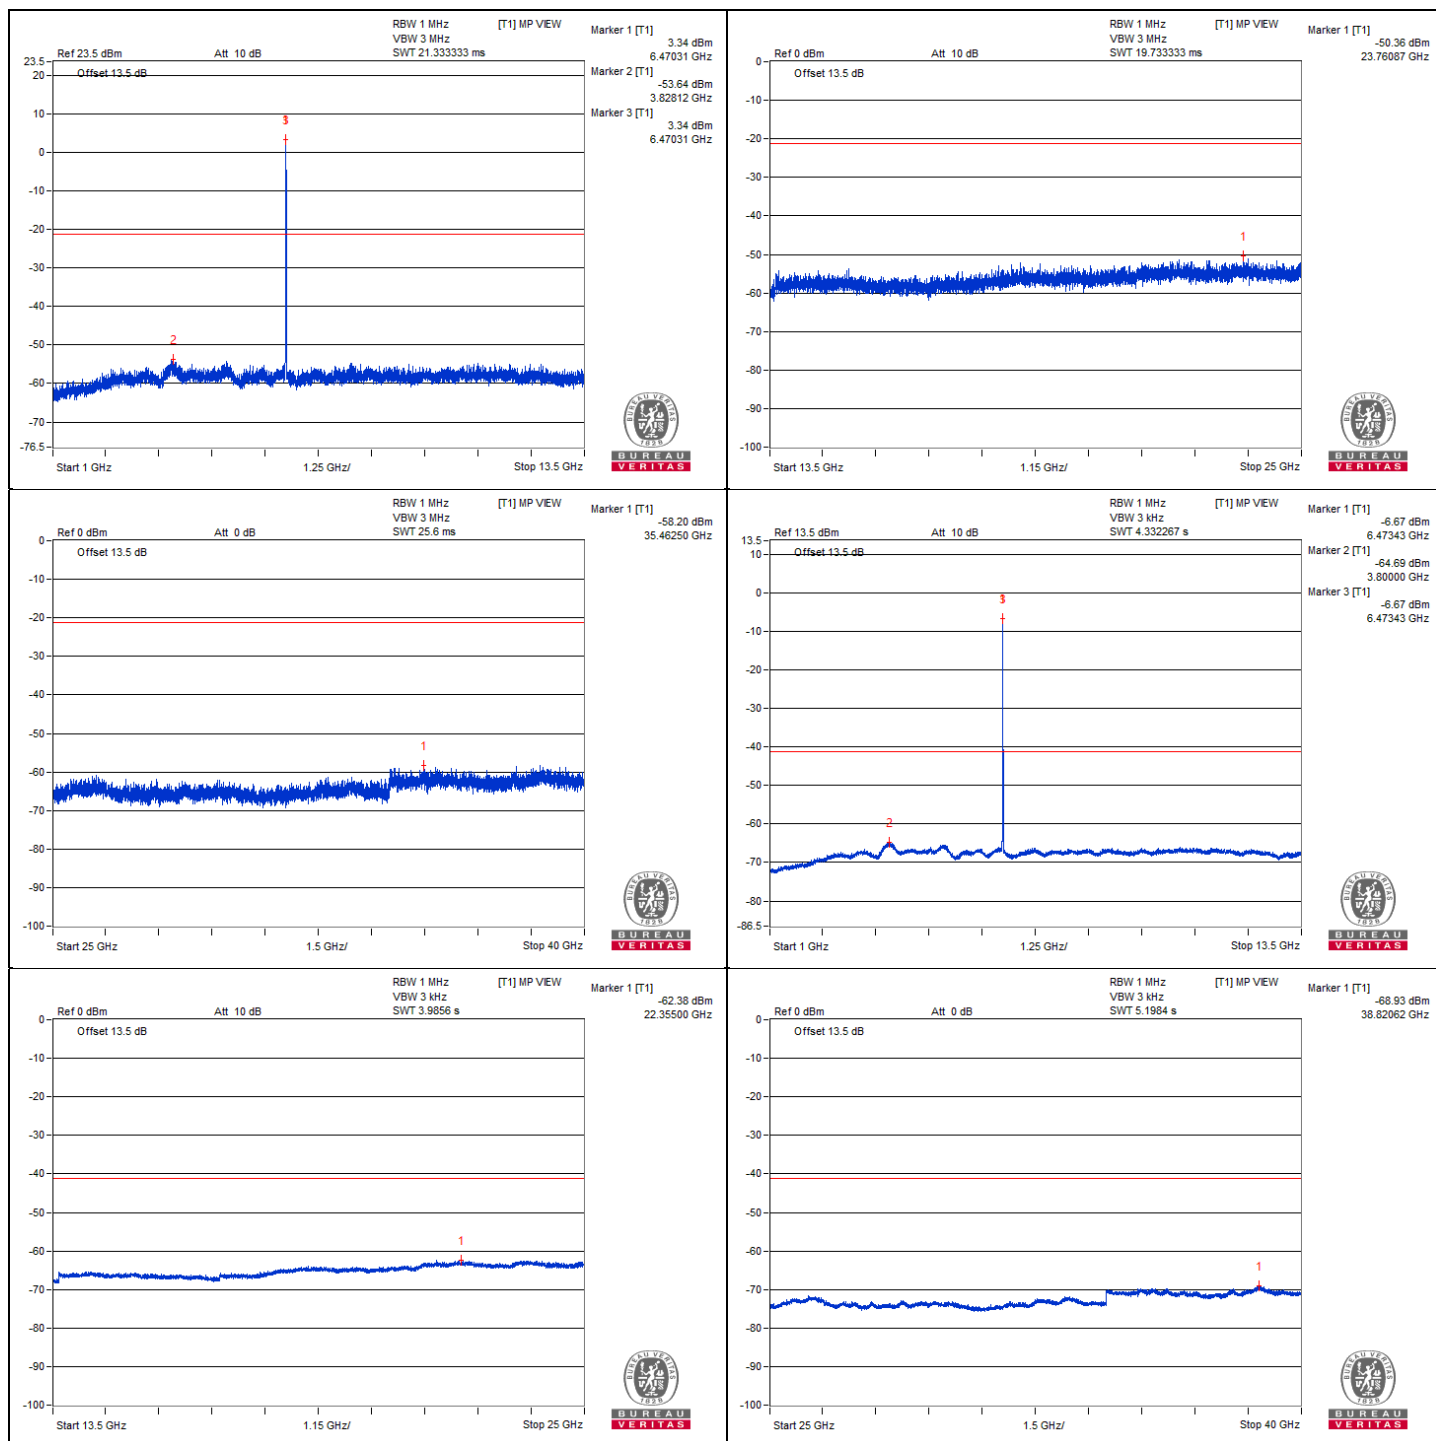


20 MHz Preamble 802.11ax (RU106) - Channel 113

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13031.25	41.93 PK	88.2	-46.27	-58.09	4.76	-53.33
2	#13039.06	31.89 AV	68.2	-36.31	-68.13	4.76	-63.37
3	19547.56	44.28 PK	74	-29.72	-55.74	4.76	-50.98
4	19537.5	35.46 AV	54	-18.54	-64.56	4.76	-59.80

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

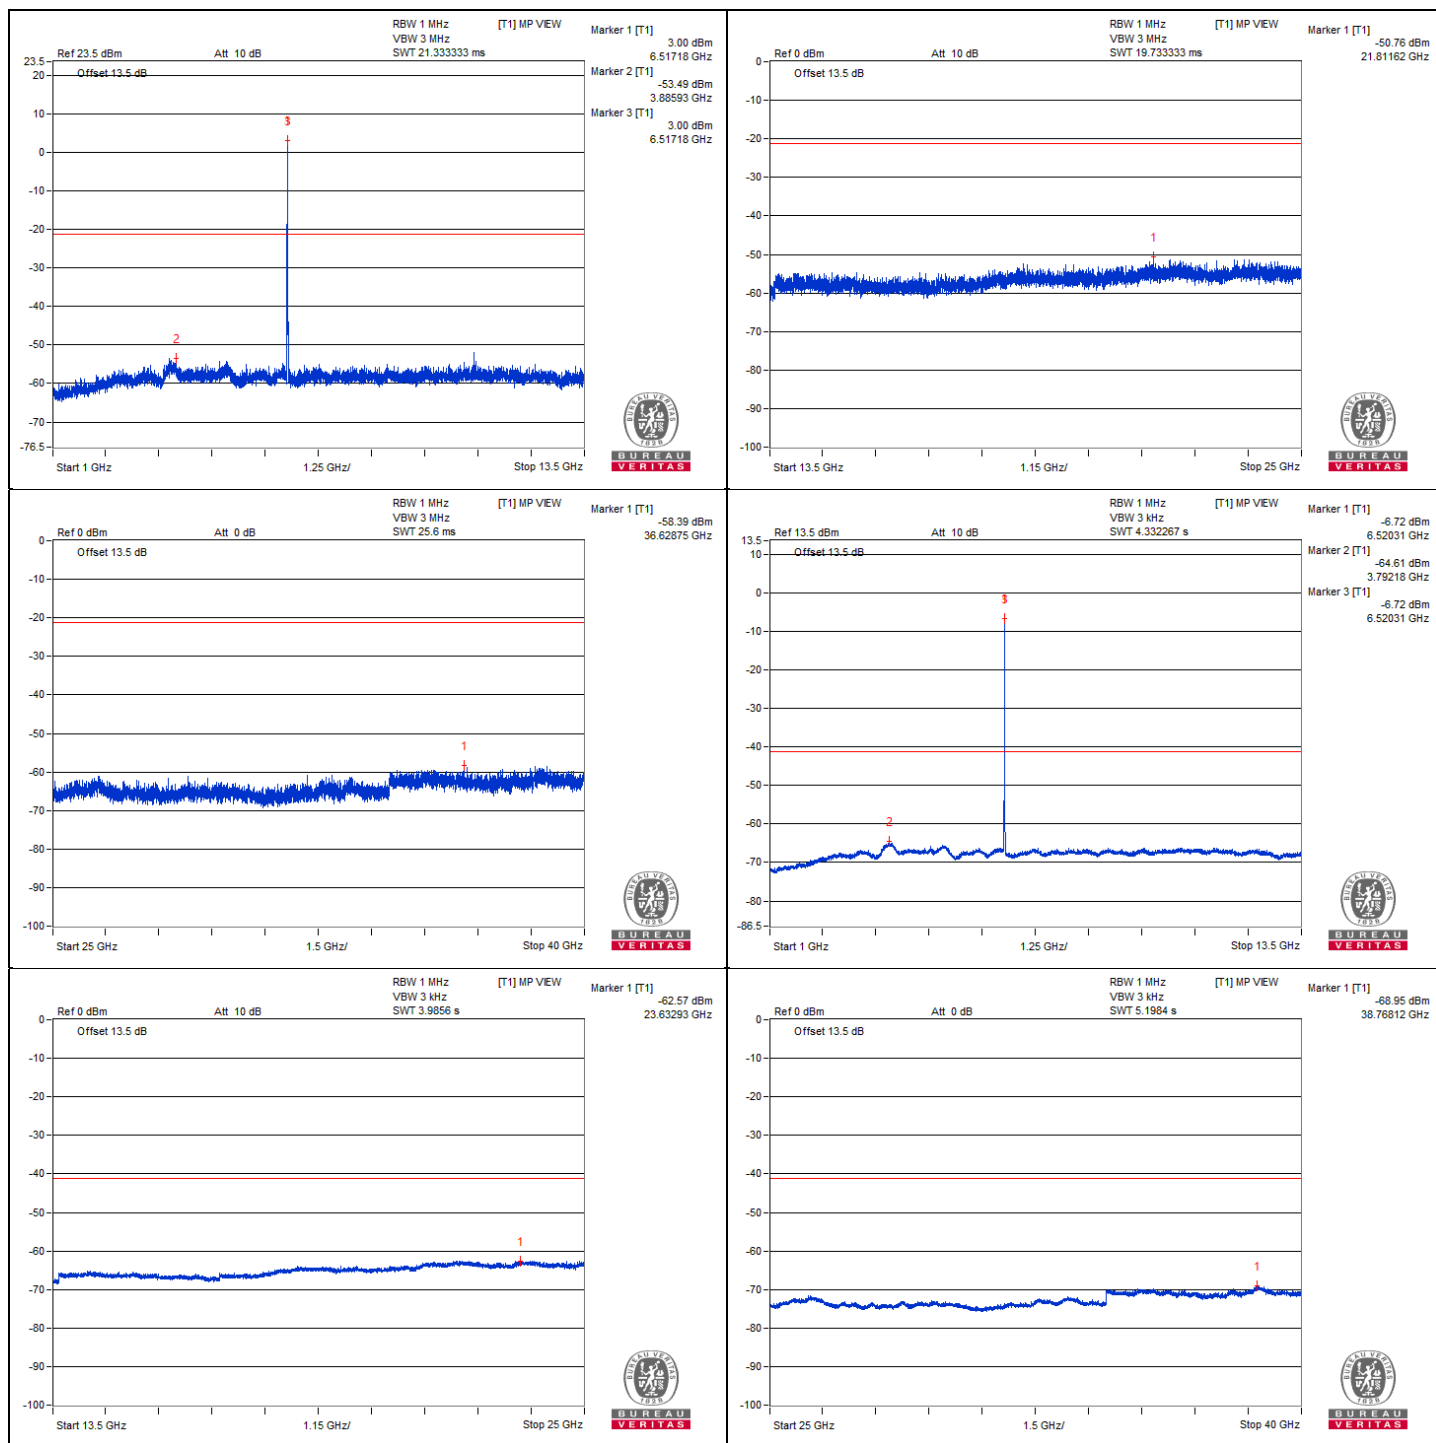


20 MHz Preamble 802.11ax (RU106) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13076.56	42.53 PK	88.2	-45.67	-57.49	4.76	-52.73
2	#13068.75	32.09 AV	68.2	-36.11	-67.93	4.76	-63.17
3	19599.31	44.75 PK	74	-29.25	-55.27	4.76	-50.51
4	19597.87	35.34 AV	54	-18.66	-64.68	4.76	-59.92

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

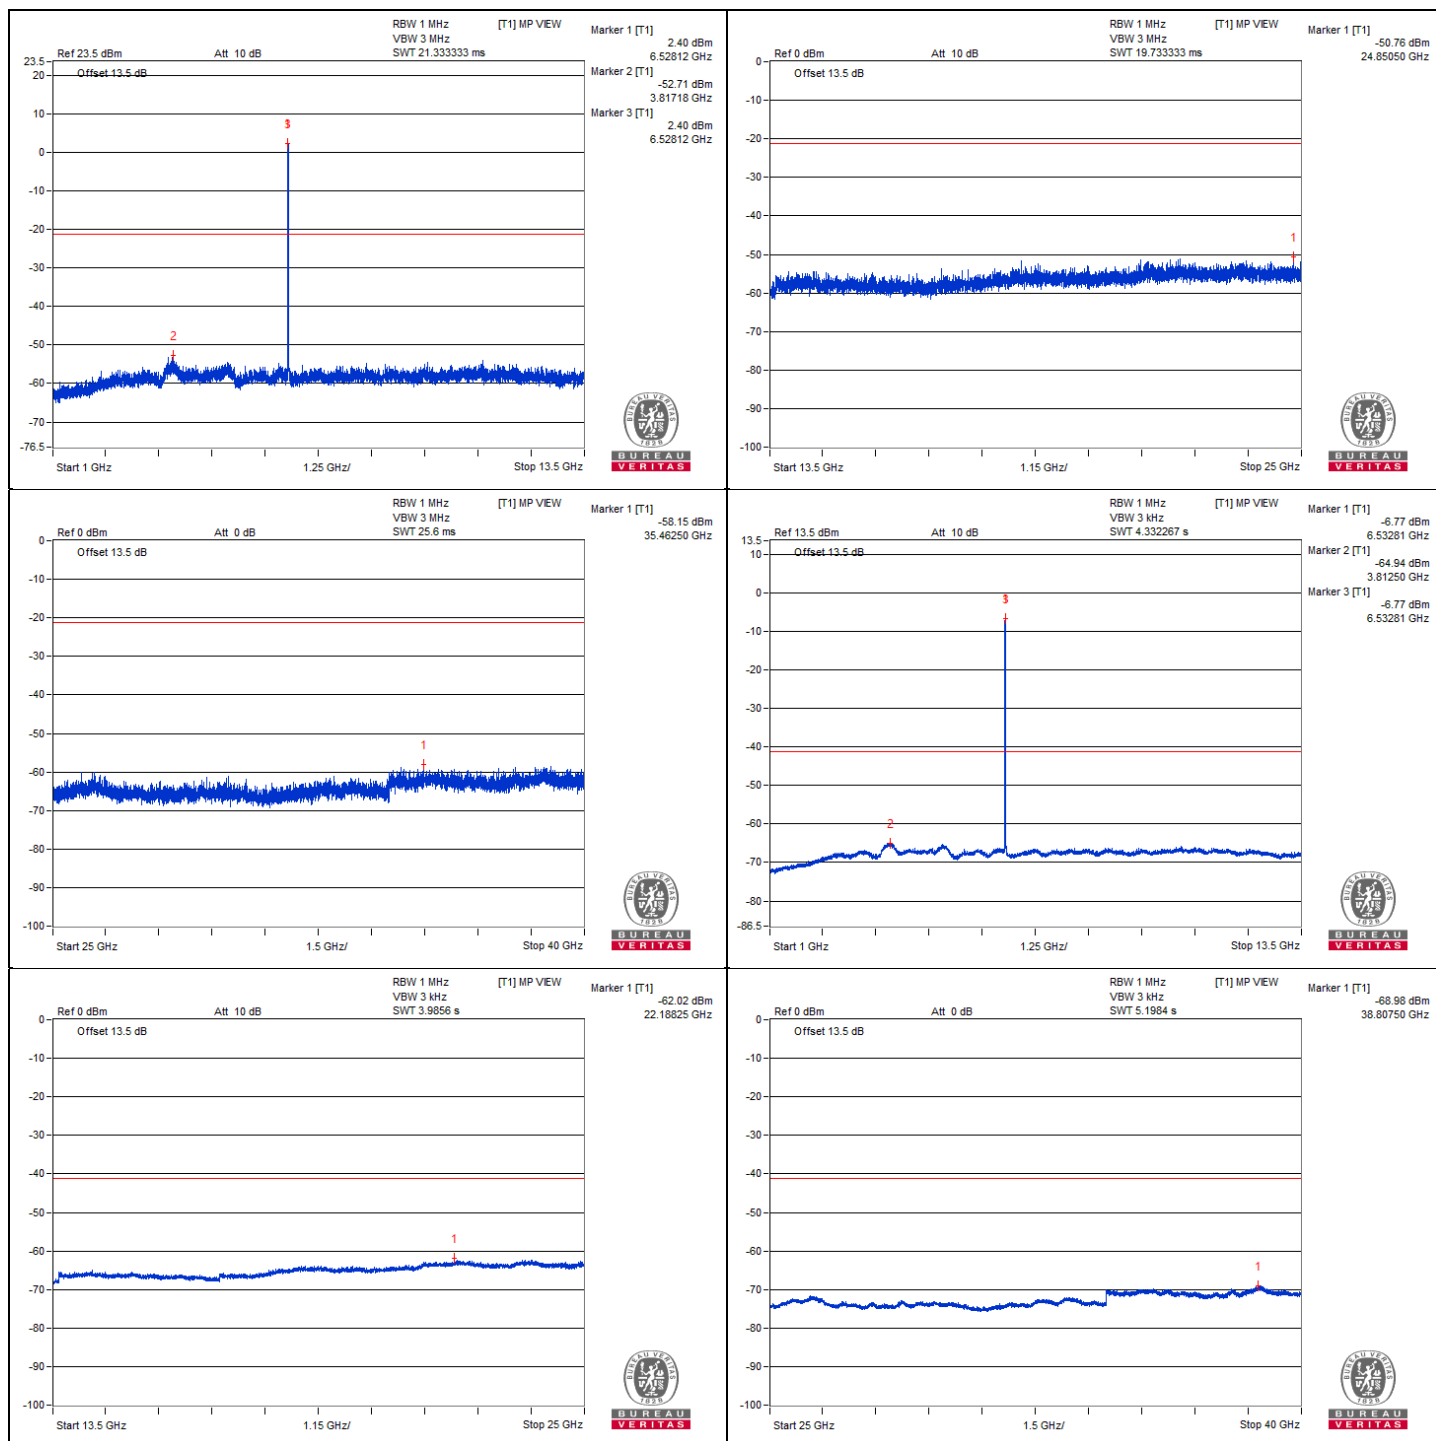


20 MHz Preamble 802.11ax (RU106) - Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13389.06	42.23 PK	74	-31.77	-57.79	4.76	-53.03
2	13382.81	32.31 AV	54	-21.69	-67.71	4.76	-62.95
3	20088.06	45.3 PK	74	-28.7	-54.72	4.76	-49.96
4	20085.18	35.66 AV	54	-18.34	-64.36	4.76	-59.60

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

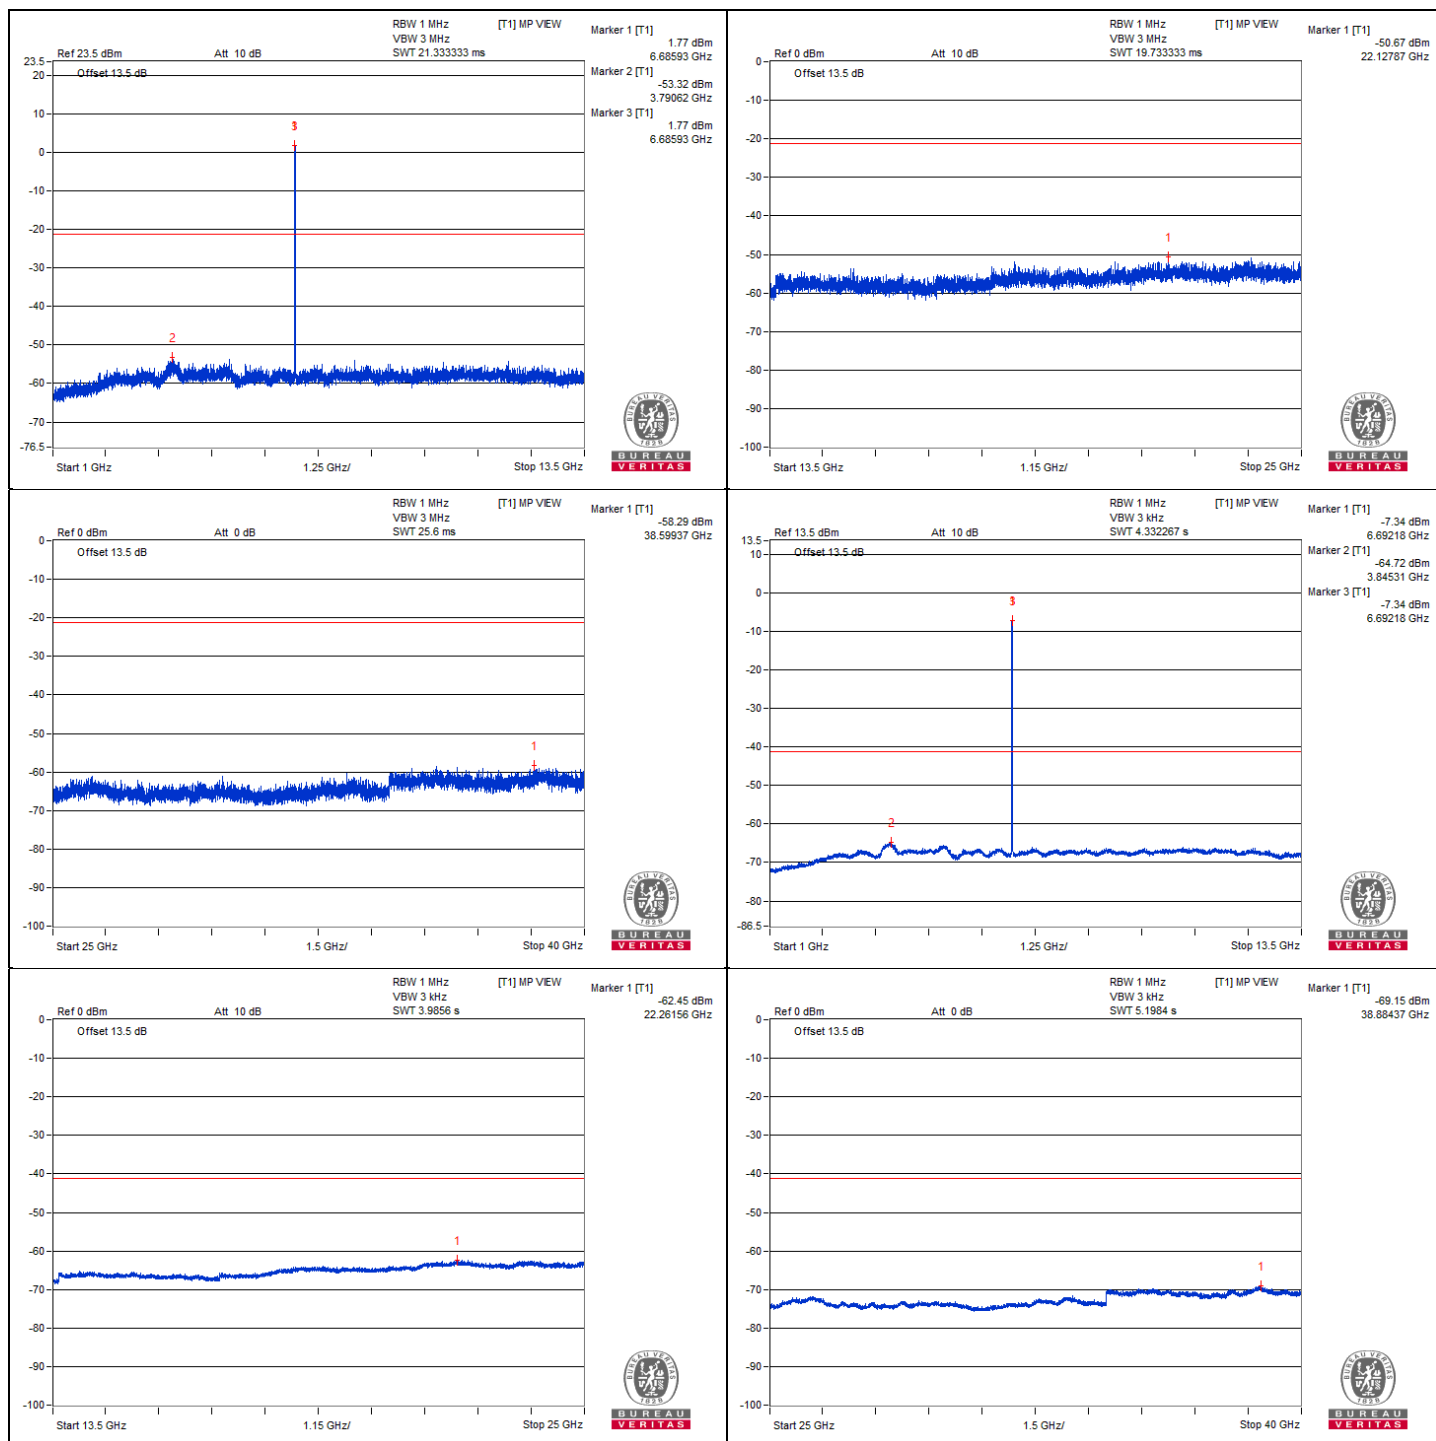


20 MHz Preamble 802.11ax (RU106) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13702.68	43.01 PK	88.2	-45.19	-57.01	4.76	-52.25
2	#13718.5	34.29 AV	68.2	-33.91	-65.73	4.76	-60.97
3	20559.56	45.84 PK	74	-28.16	-54.18	4.76	-49.42
4	20562.43	35.36 AV	54	-18.64	-64.66	4.76	-59.90

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

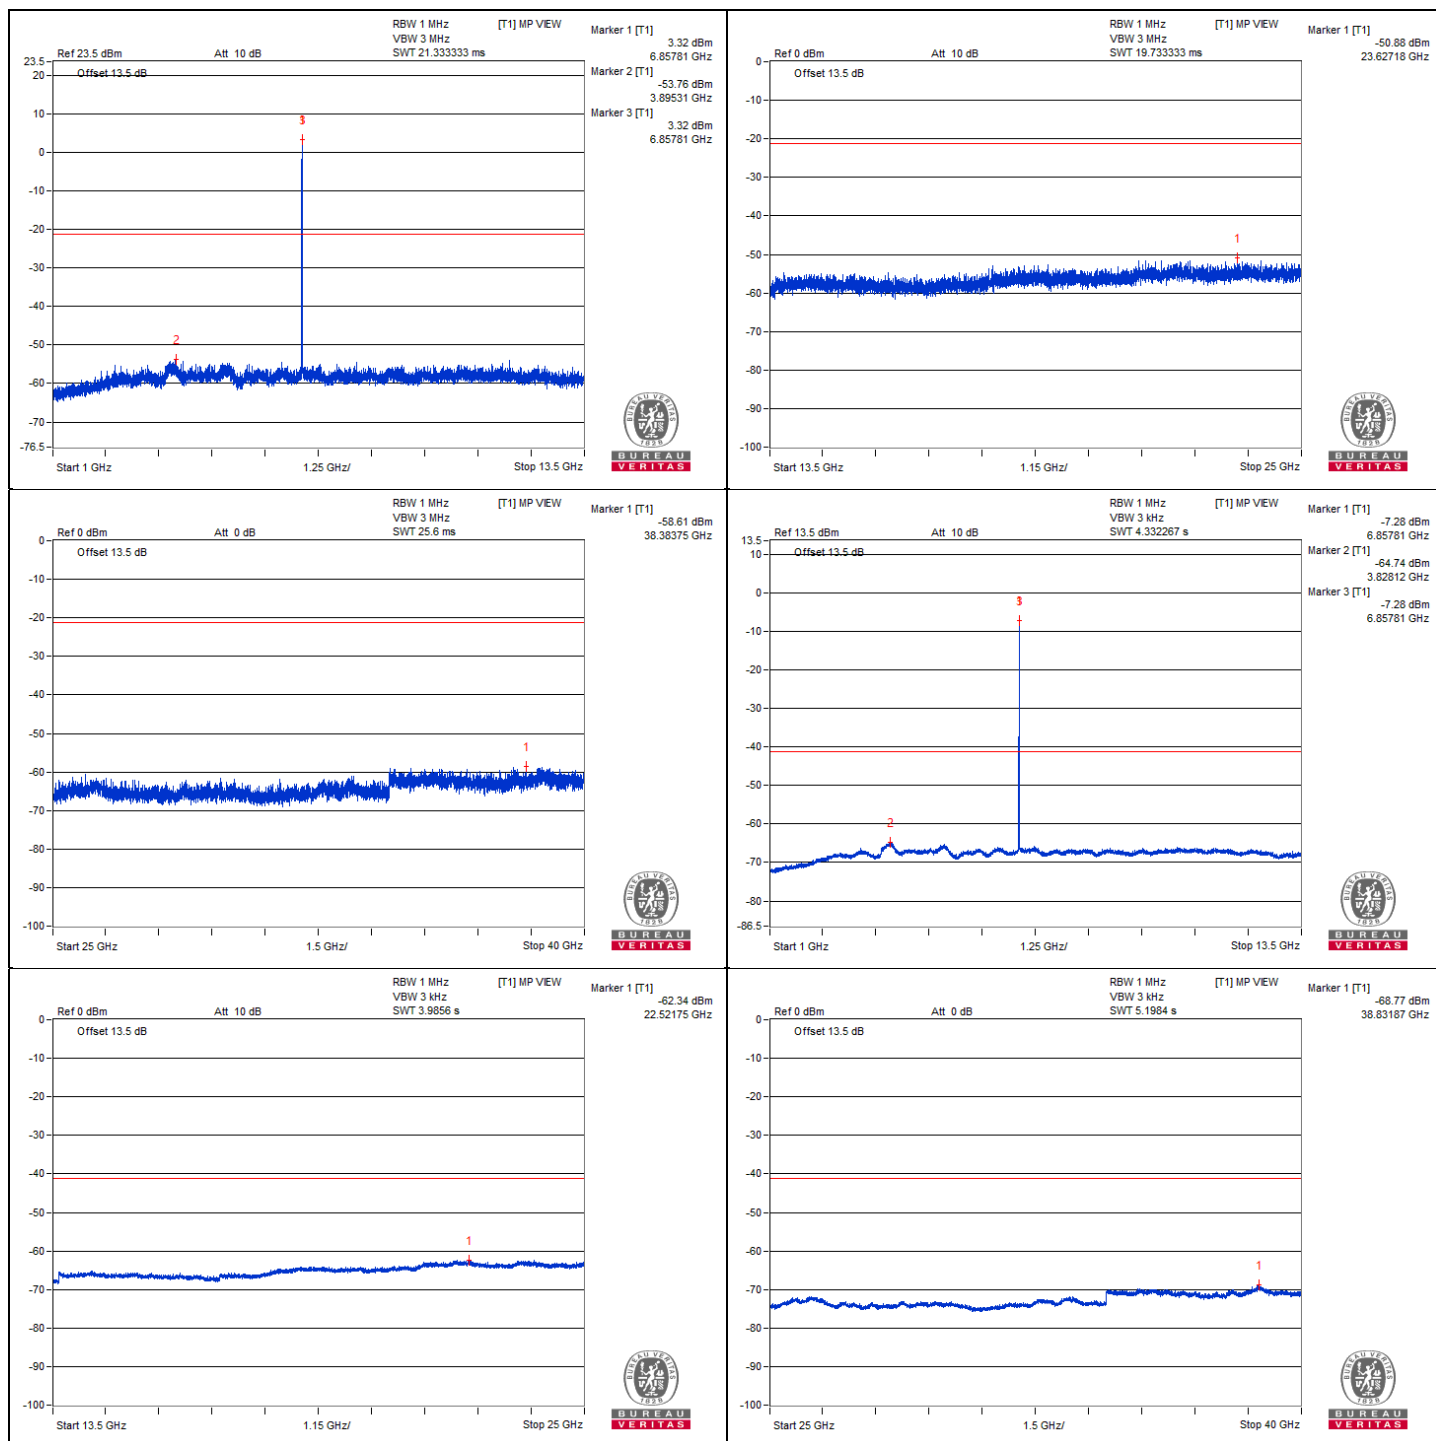


20 MHz Preamble 802.11ax (RU106) - Channel 185

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13744.37	43.95 PK	88.2	-44.25	-56.07	4.76	-51.31
2	#13757.31	34.03 AV	68.2	-34.17	-65.99	4.76	-61.23
3	20617.06	45.36 PK	74	-28.64	-54.66	4.76	-49.90
4	20624.25	35.22 AV	54	-18.78	-64.8	4.76	-60.04

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

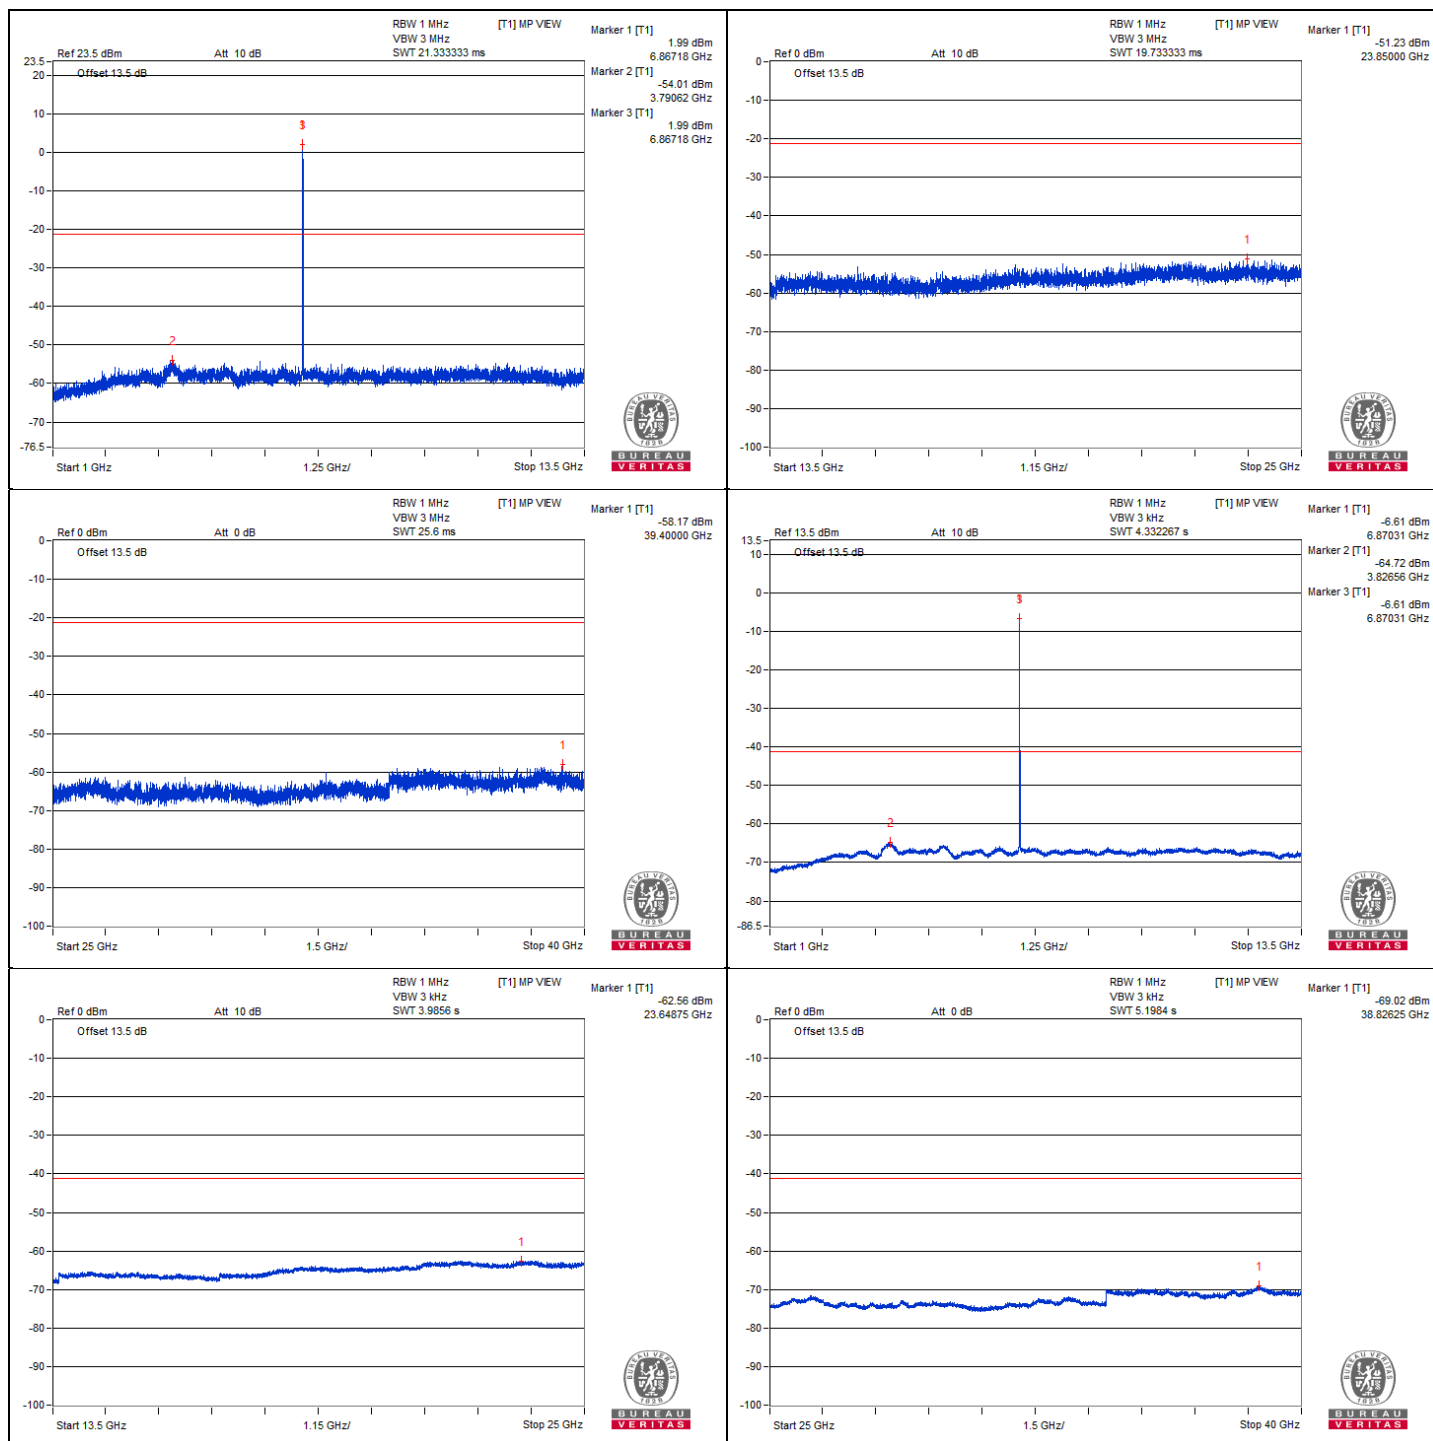


20 MHz Preamble 802.11ax (RU106) - Channel 209

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13995.93	44.29 PK	88.2	-43.91	-55.73	4.76	-50.97
2	#13984.43	33.91 AV	68.2	-34.29	-66.11	4.76	-61.35
3	20989.37	46.2 PK	74	-27.8	-53.82	4.76	-49.06
4	20990.81	36.04 AV	54	-17.96	-63.98	4.76	-59.22

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

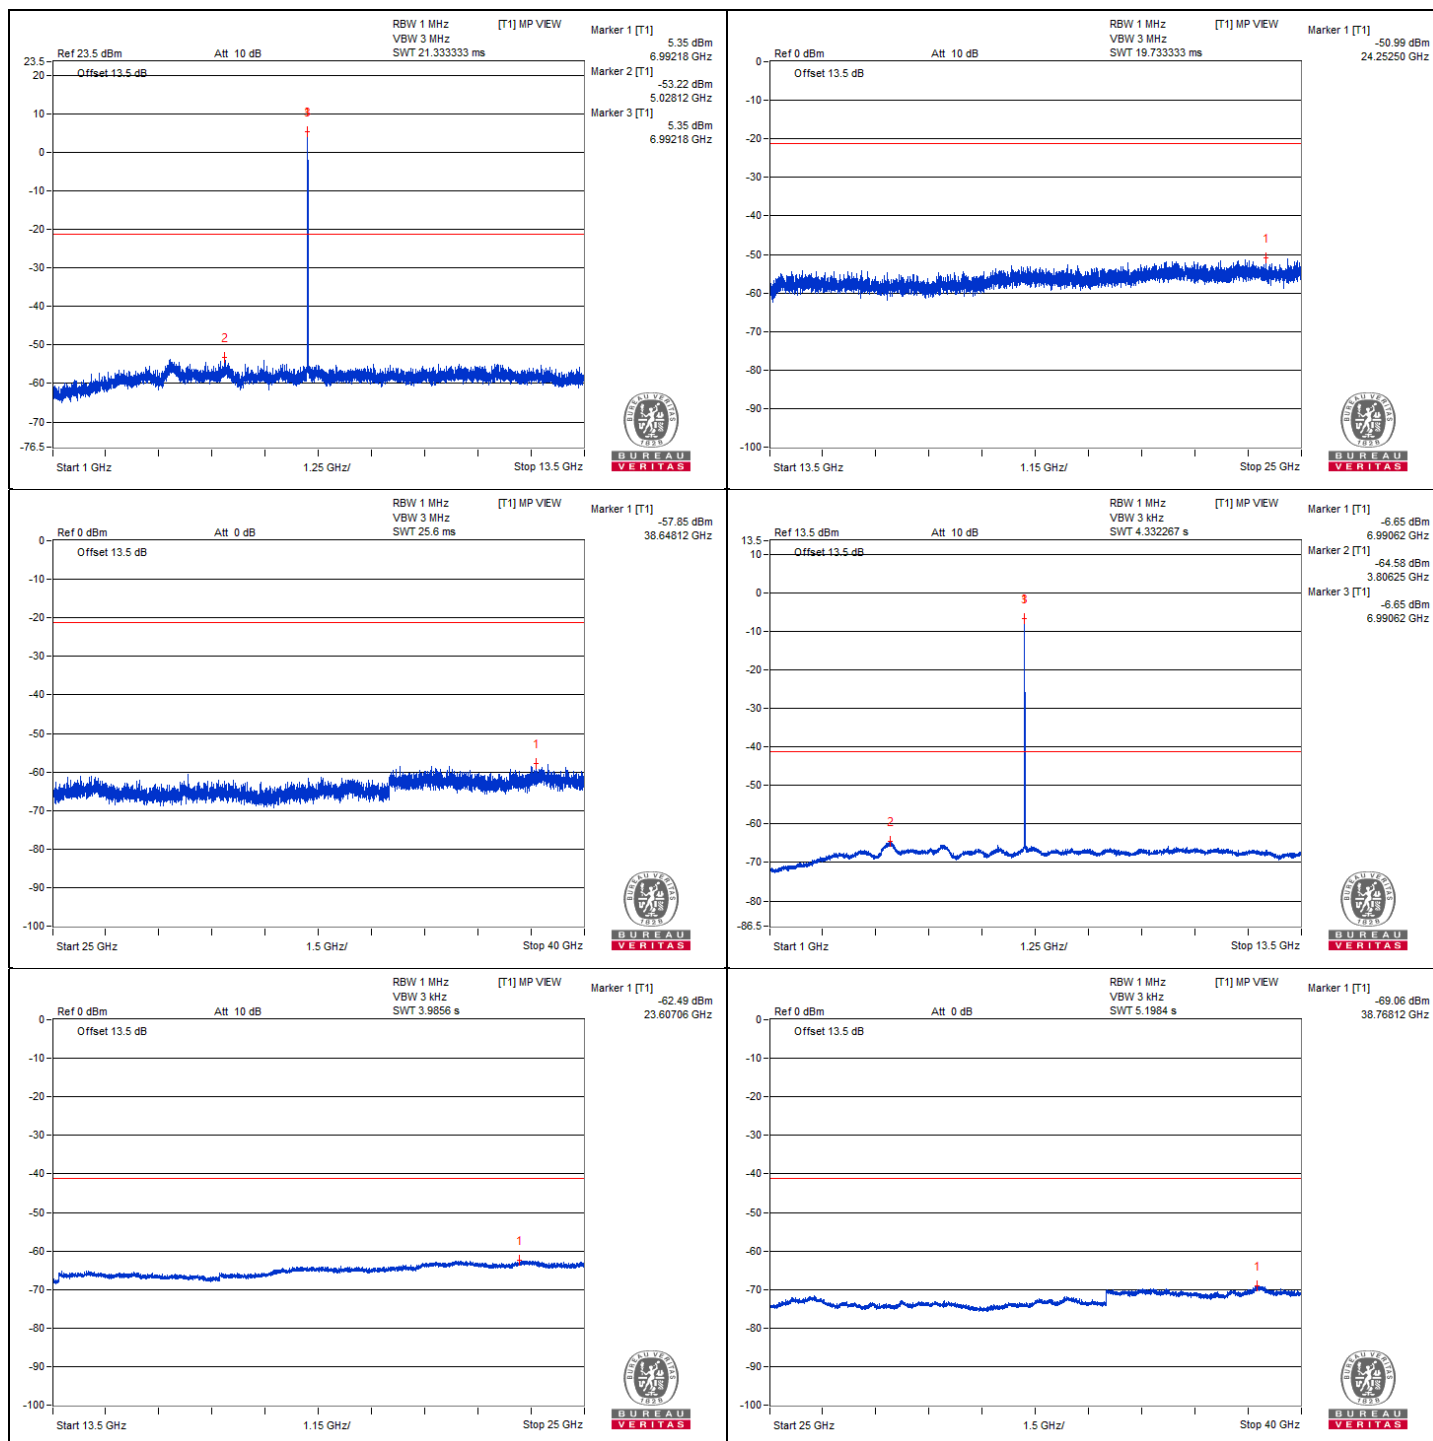


20 MHz Preamble 802.11ax (RU106) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14227.37	45.15 PK	88.2	-43.05	-54.87	4.76	-50.11
2	#14244.62	34.31 AV	68.2	-33.89	-65.71	4.76	-60.95
3	21348.75	45.47 PK	74	-28.53	-54.55	4.76	-49.79
4	21354.5	35.77 AV	54	-18.23	-64.25	4.76	-59.49

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

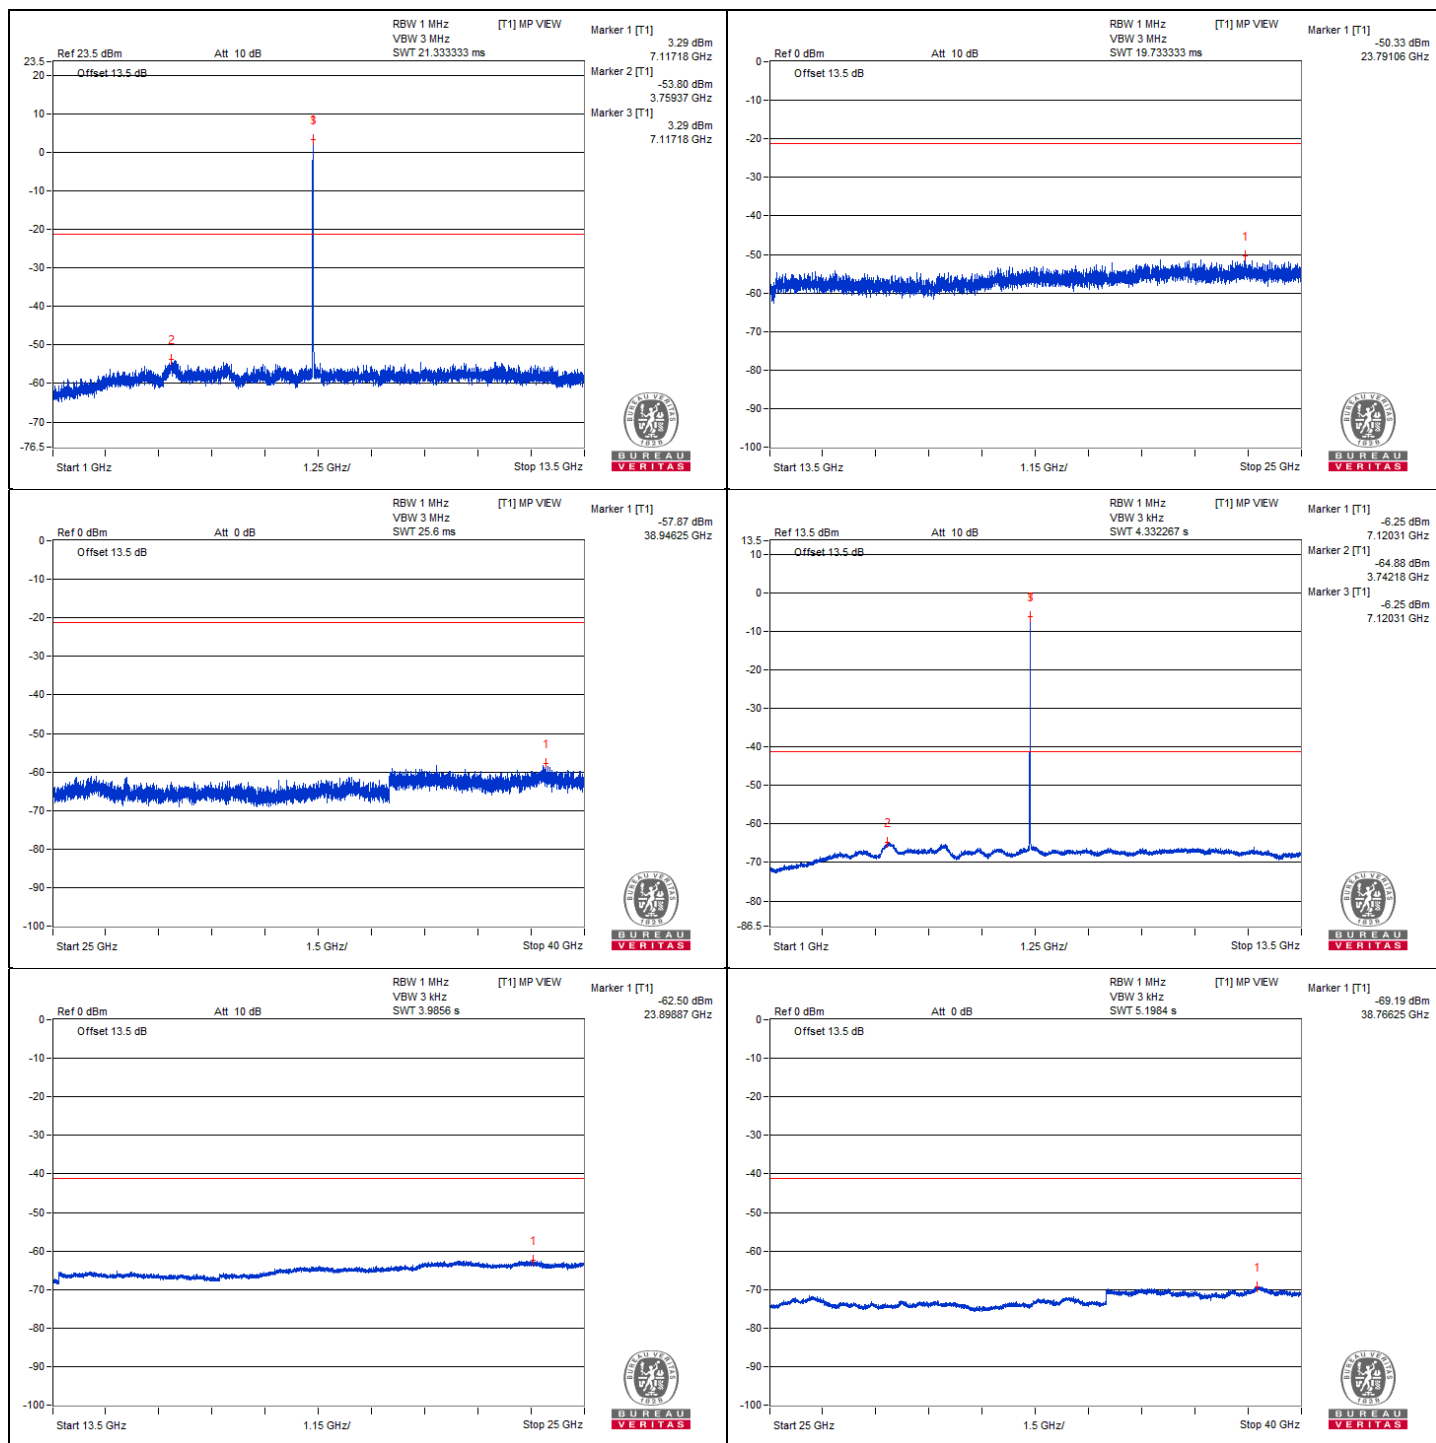


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	61.34 PK	88.2	-26.86	-38.01	4.09	-33.92
2	#7125	50.76 AV	68.2	-17.44	-48.59	4.09	-44.50

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

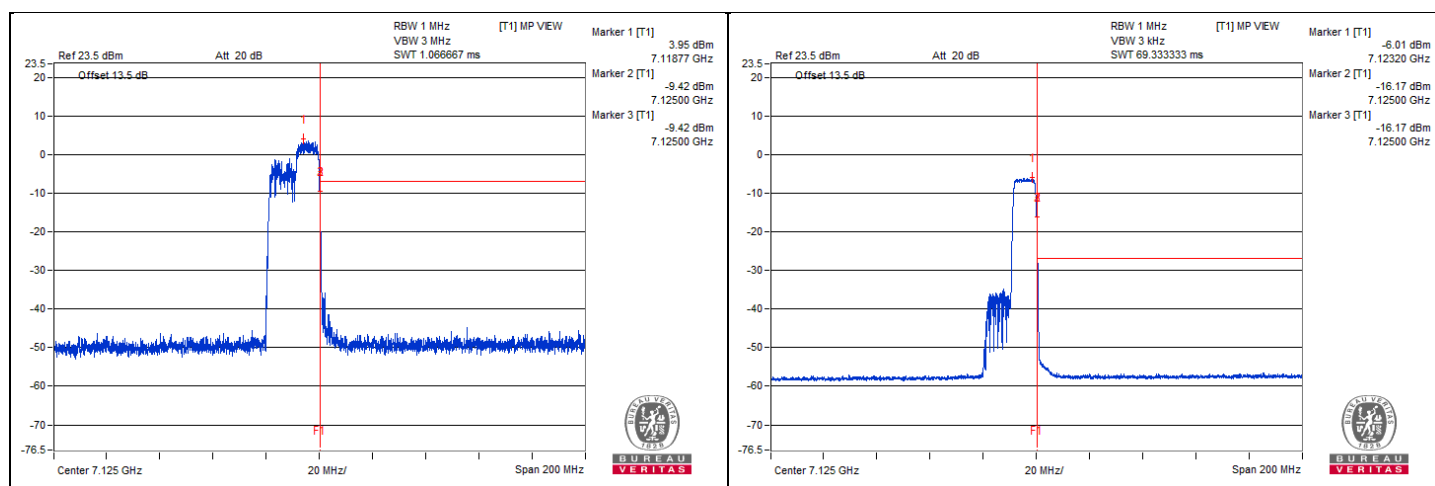







20 MHz Preamble 802.11be (RU52+26) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11914.06	54.14 PK	74	-19.86	-45.88	4.76	-41.12
2	11907.81	42.8 AV	54	-11.2	-57.22	4.76	-52.46
3	17861.37	44.04 PK	74	-29.96	-55.98	4.76	-51.22
4	17855.62	33.86 AV	54	-20.14	-66.16	4.76	-61.40

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

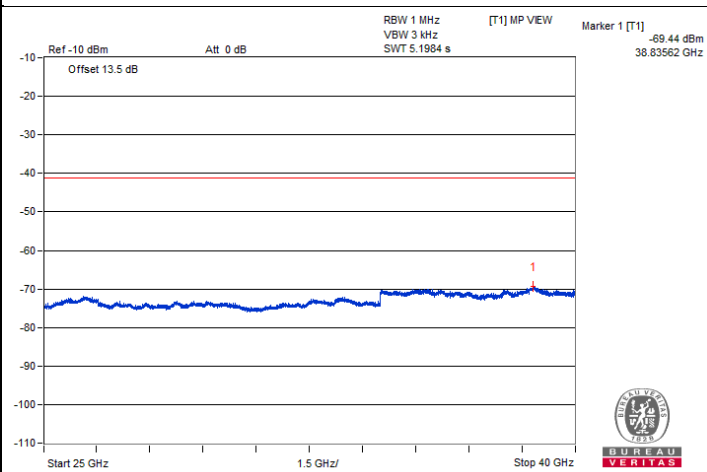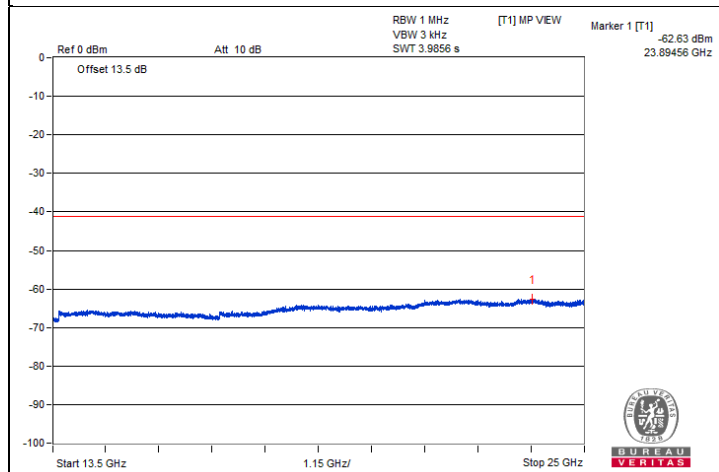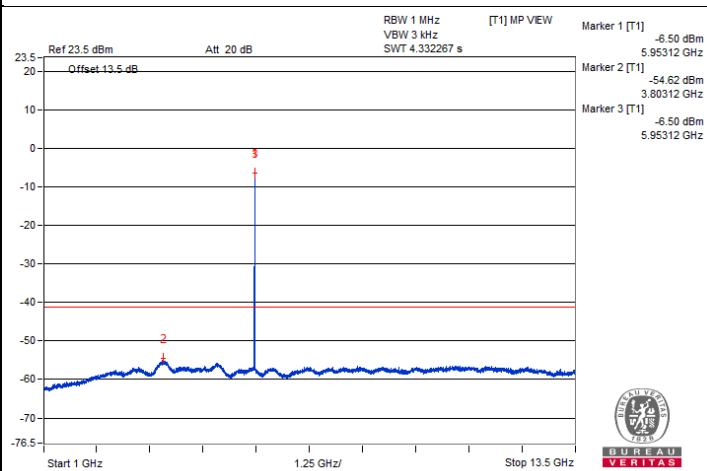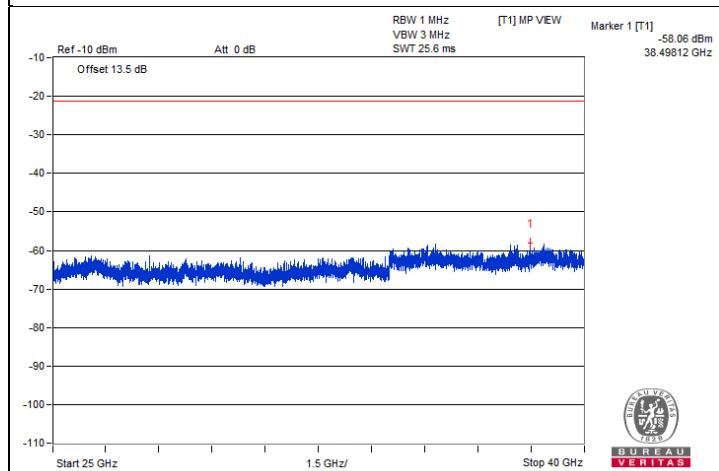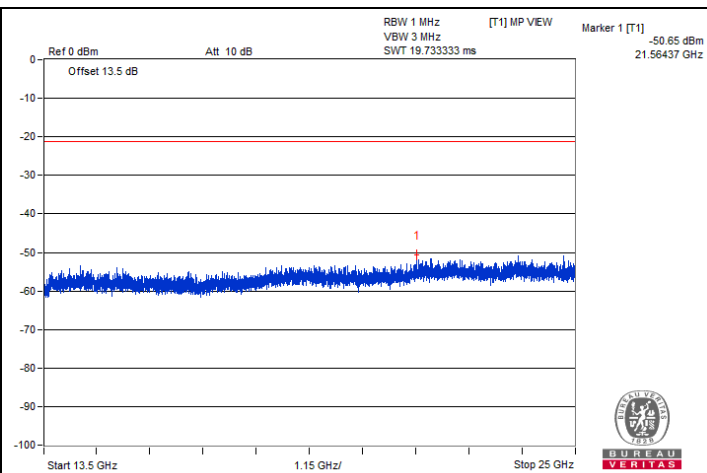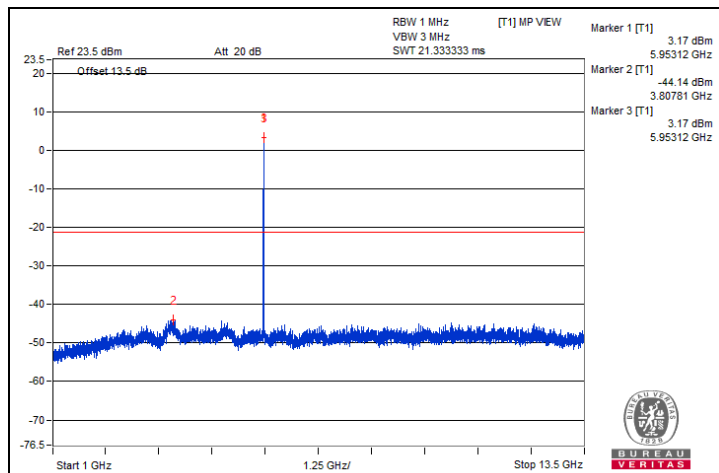


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5916.02	54.92 PK	88.2	-33.28	-45.1	4.76	-40.34
2	#5856.52	43.32 AV	68.2	-24.88	-56.7	4.76	-51.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

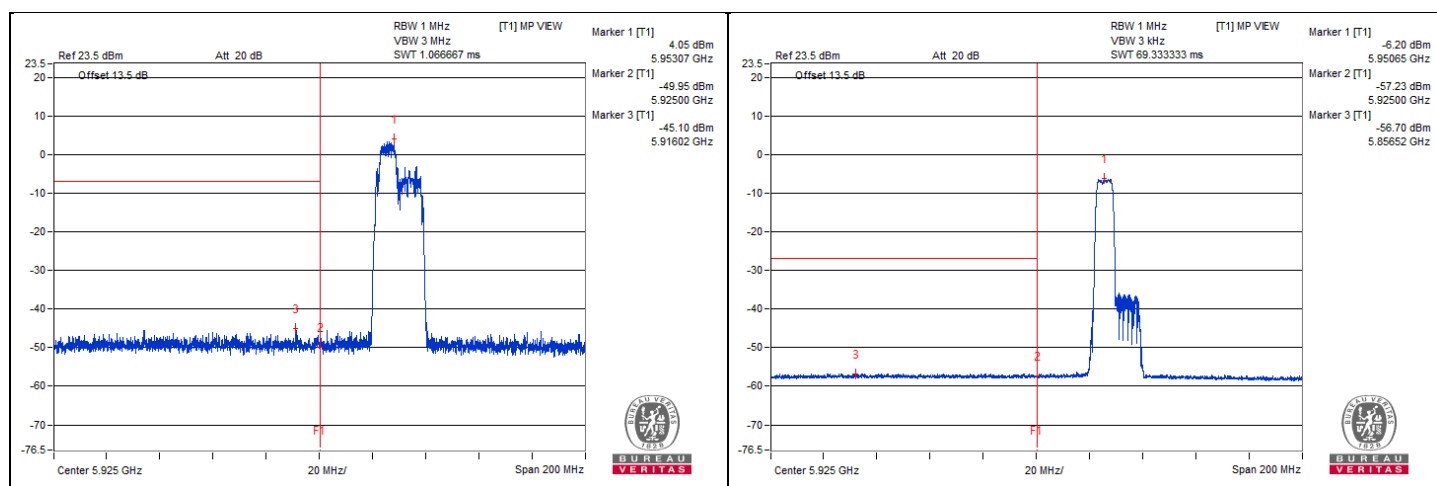


20 MHz Preamble 802.11be (RU52+26) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12839.06	51.95 PK	88.2	-36.25	-48.07	4.76	-43.31
2	#12831.25	42.31 AV	68.2	-25.89	-57.71	4.76	-52.95
3	19254.31	45.56 PK	74	-28.44	-54.46	4.76	-49.70
4	19251.43	35.67 AV	54	-18.33	-64.35	4.76	-59.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

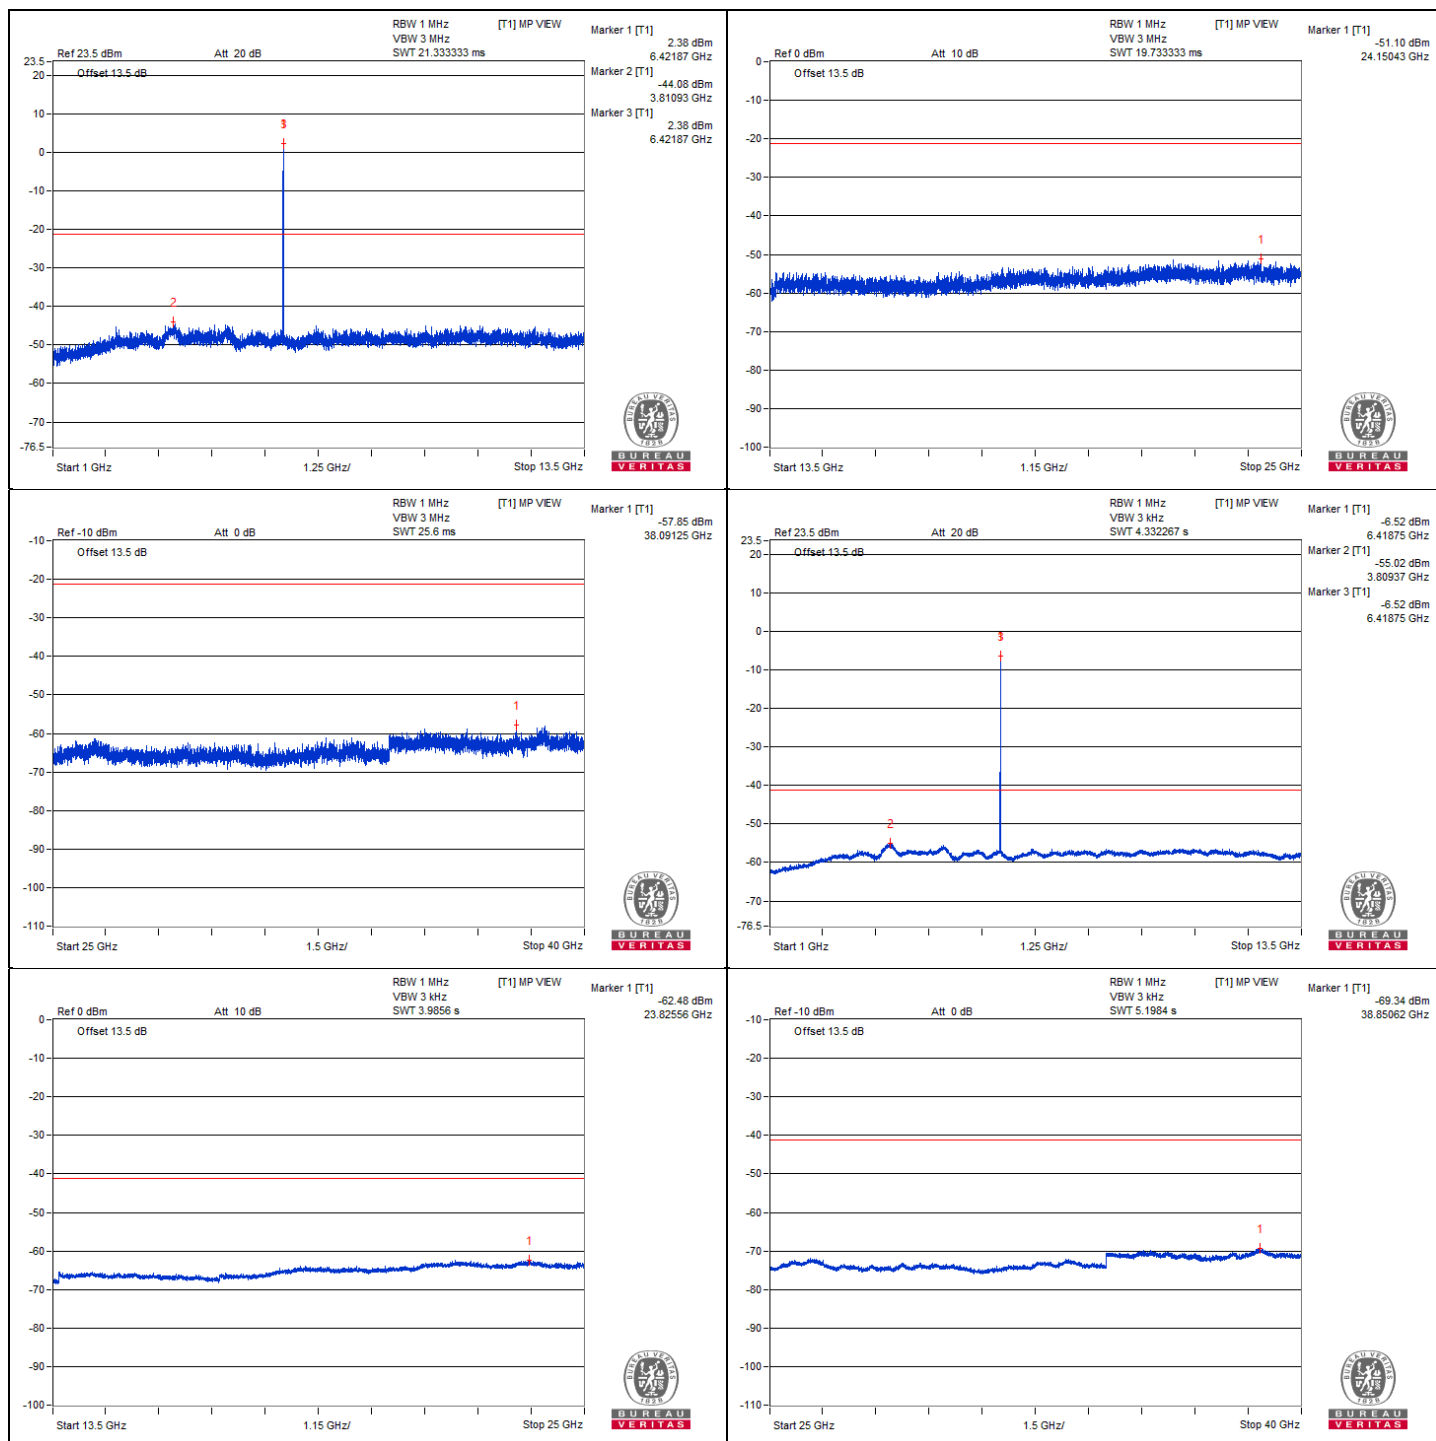


20 MHz Preamble 802.11be (RU52+26) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12865.62	51.74 PK	88.2	-36.46	-48.28	4.76	-43.52
2	#12879.68	41.7 AV	68.2	-26.5	-58.32	4.76	-53.56
3	19310.37	44.85 PK	74	-29.15	-55.17	4.76	-50.41
4	19300.31	35.36 AV	54	-18.64	-64.66	4.76	-59.90

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

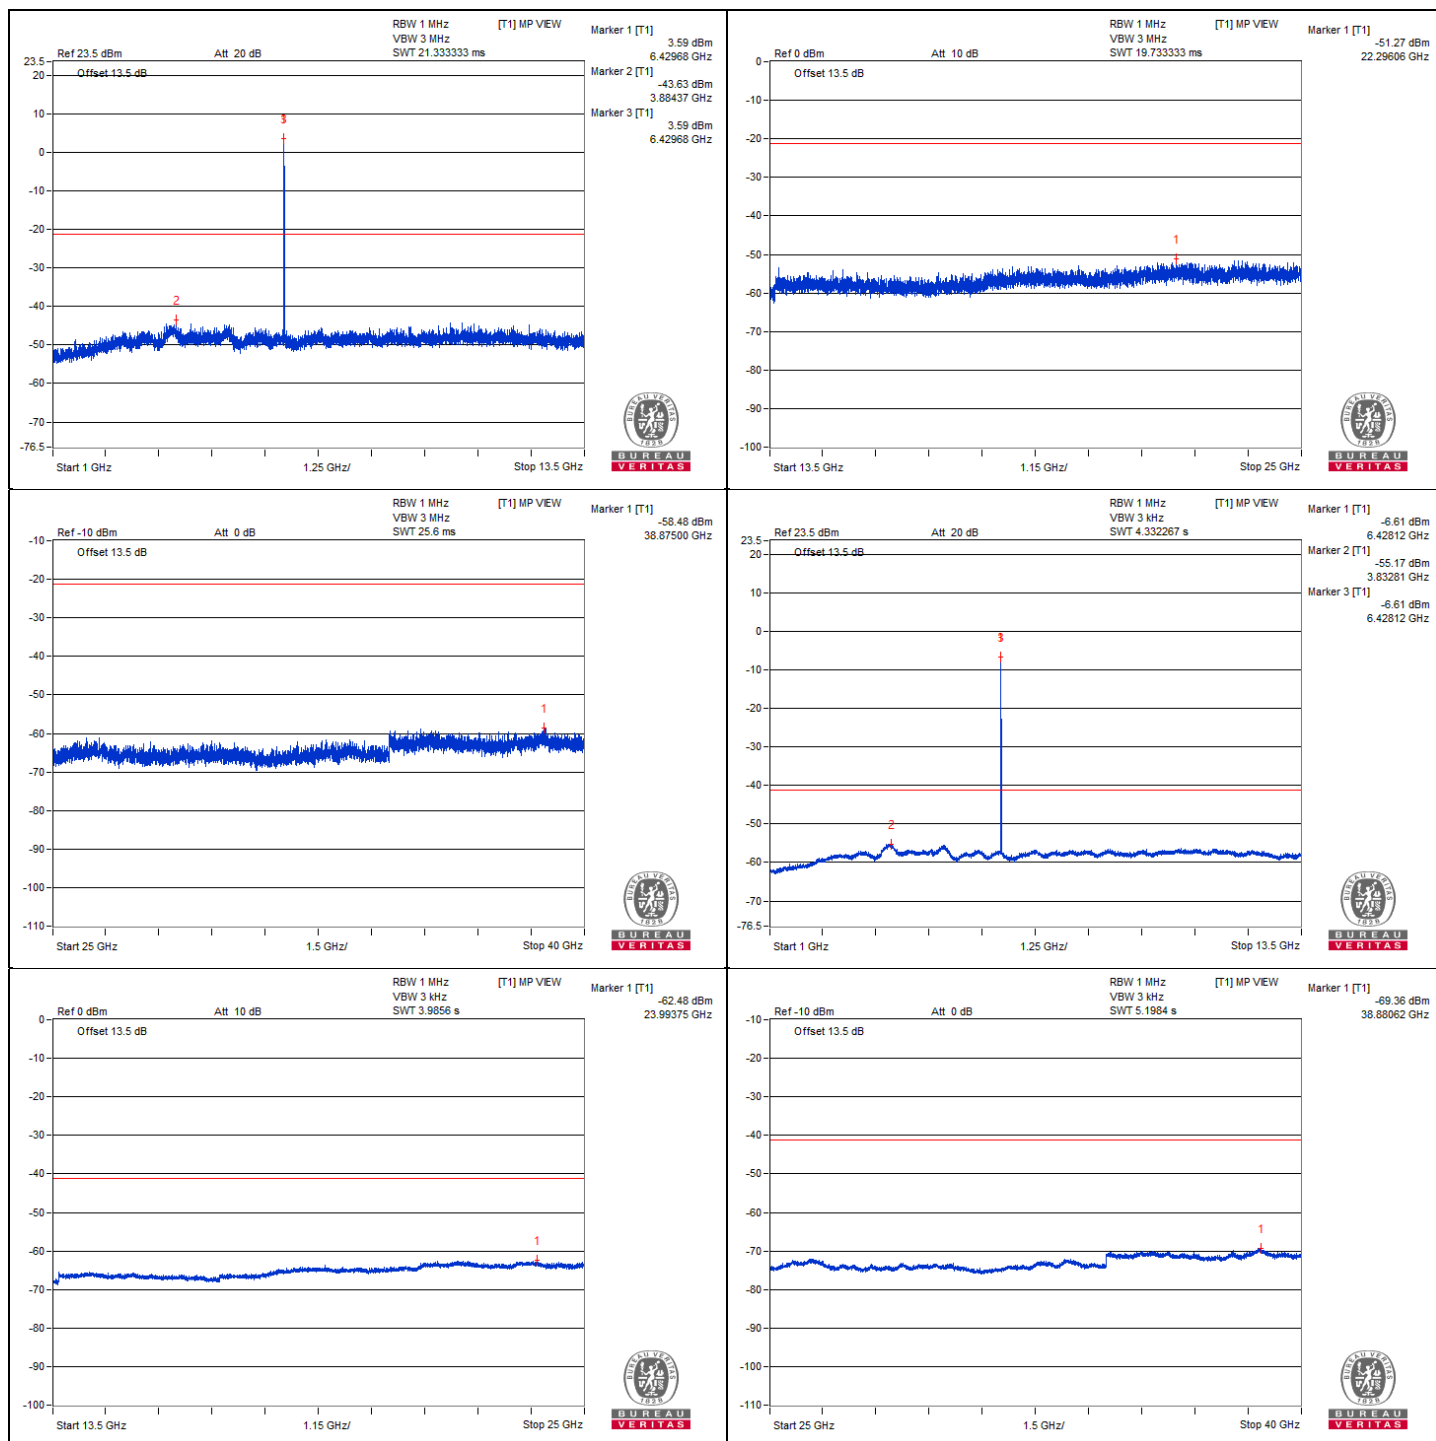


20 MHz Preamble 802.11be (RU52+26) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13075	51.09 PK	88.2	-37.11	-48.93	4.76	-44.17
2	#13071.87	41.87 AV	68.2	-26.33	-58.15	4.76	-53.39
3	19596.43	44.81 PK	74	-29.19	-55.21	4.76	-50.45
4	19603.62	35.16 AV	54	-18.84	-64.86	4.76	-60.10

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

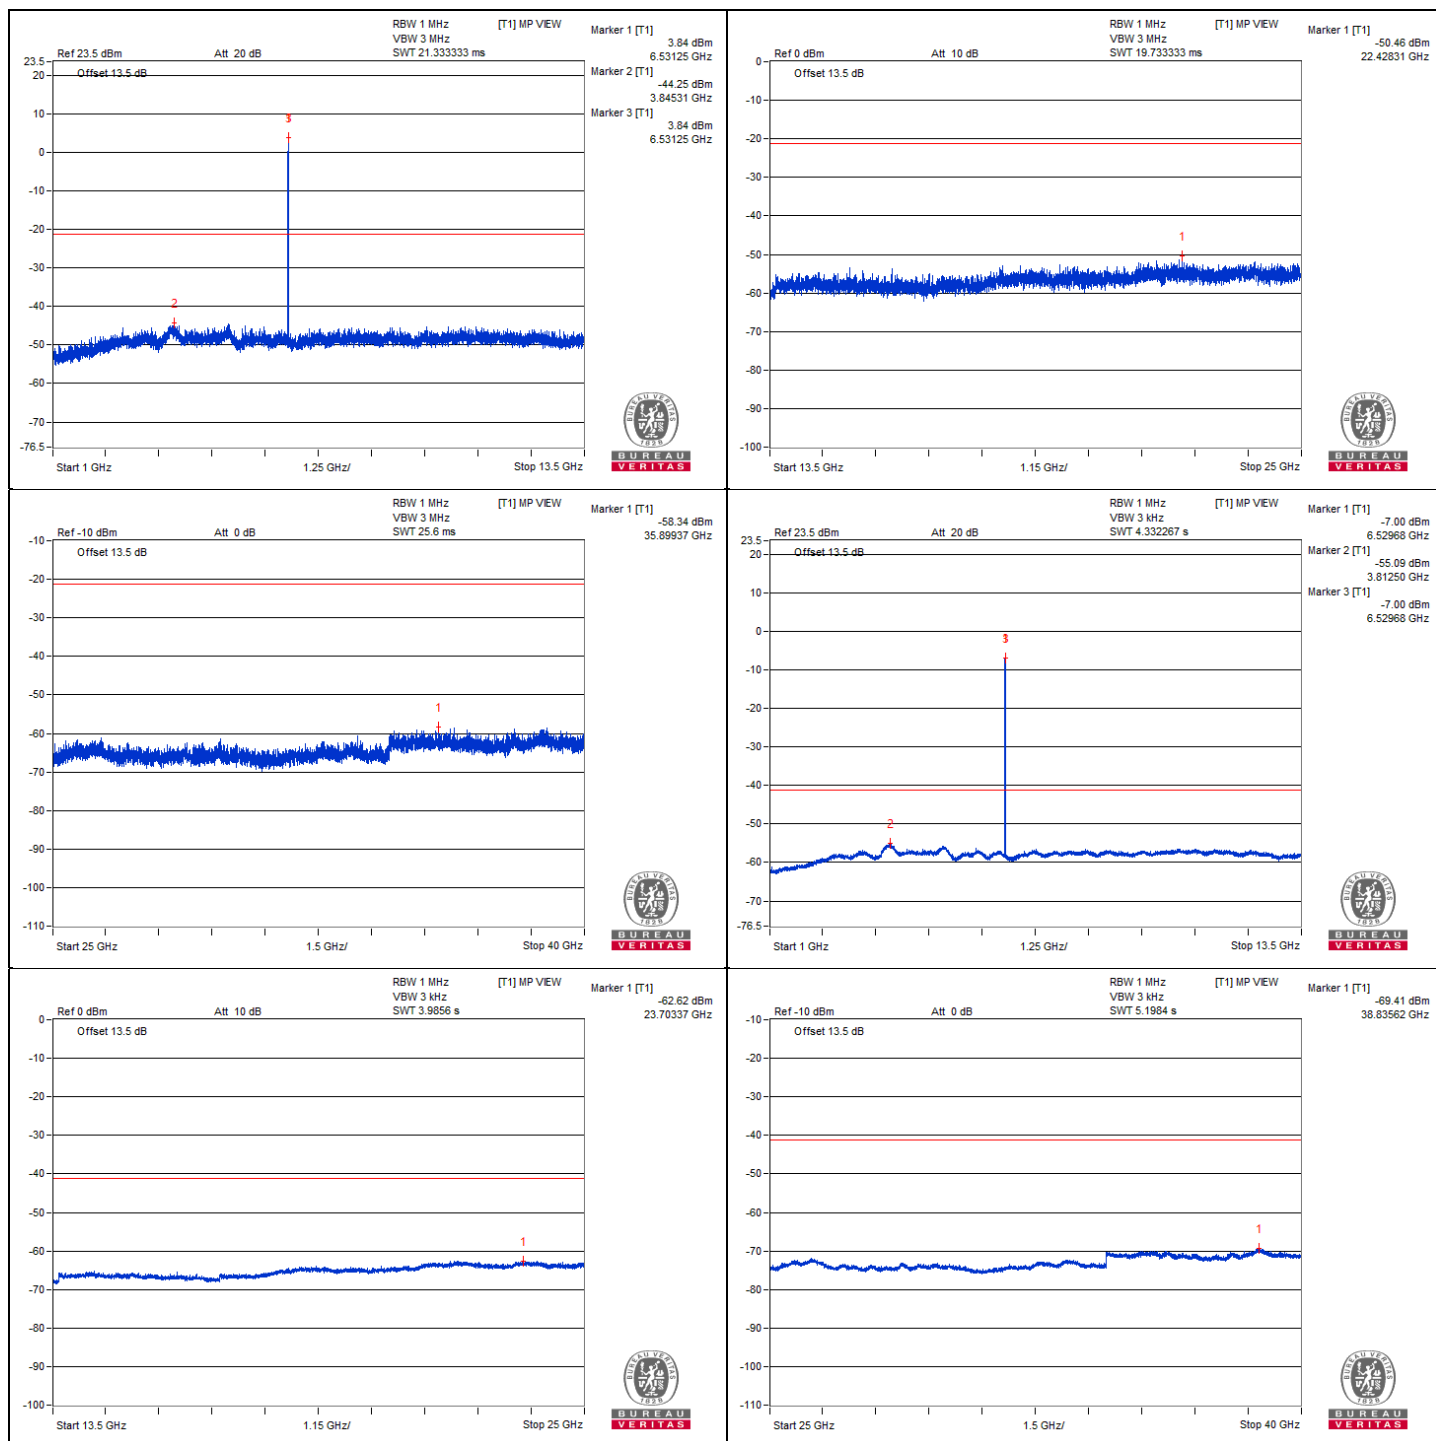







20 MHz Preamble 802.11be (RU52+26) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13705.56	42.68 PK	88.2	-45.52	-57.34	4.76	-52.58
2	#13719.93	33.73 AV	68.2	-34.47	-66.29	4.76	-61.53
3	20558.12	45.94 PK	74	-28.06	-54.08	4.76	-49.32
4	20562.43	35.18 AV	54	-18.82	-64.84	4.76	-60.08

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

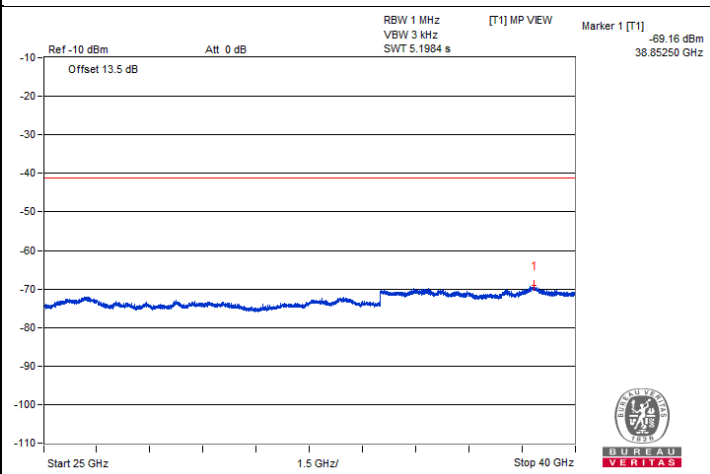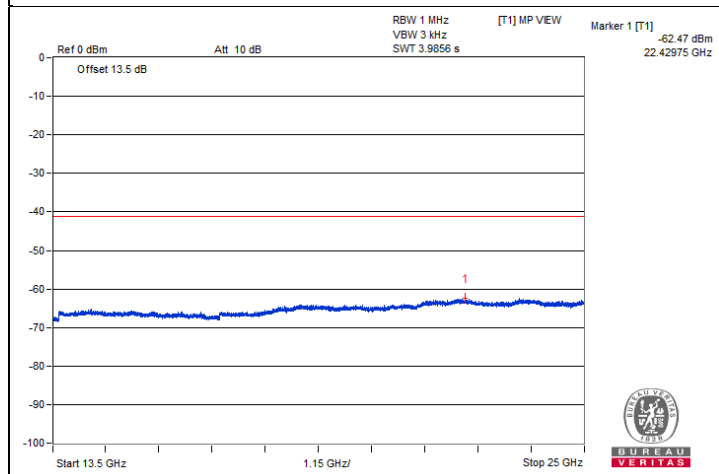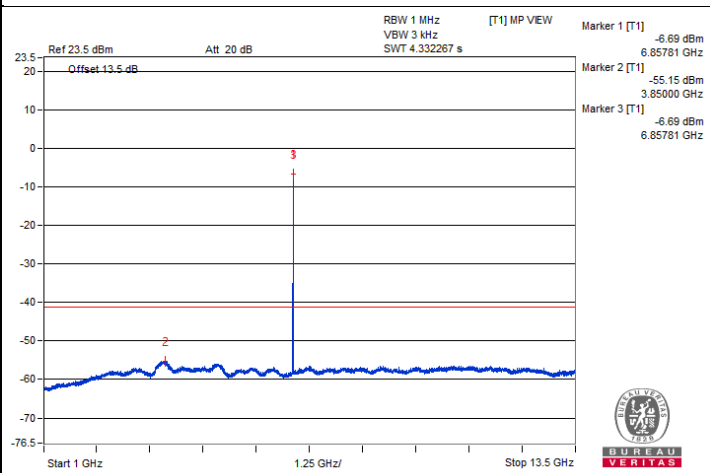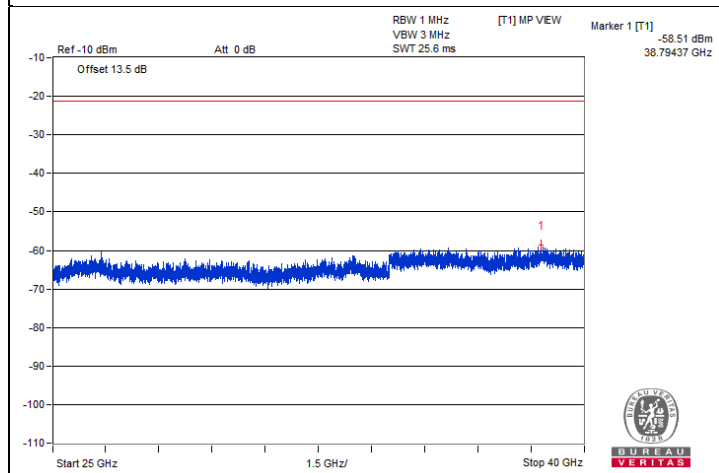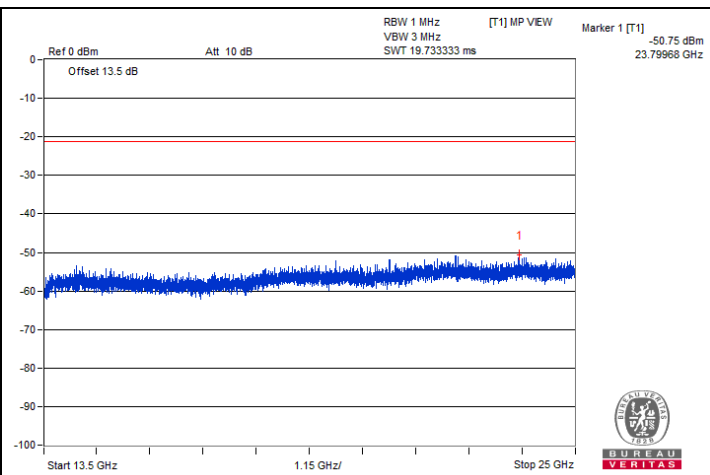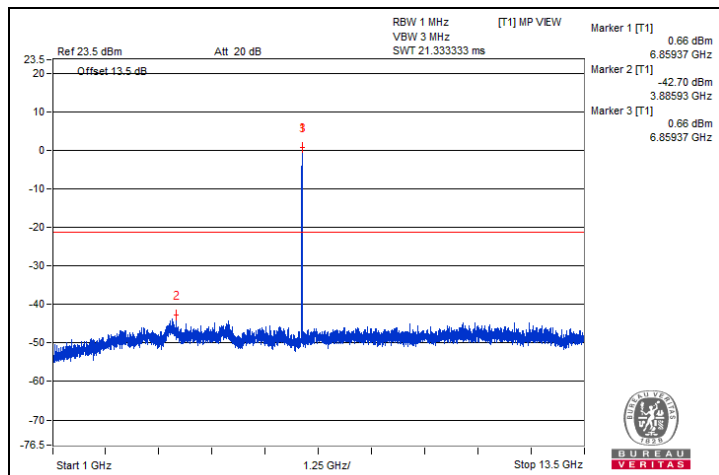







20 MHz Preamble 802.11be (RU52+26) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14246.06	44.95 PK	88.2	-43.25	-55.07	4.76	-50.31
2	#14241.75	33.95 AV	68.2	-34.25	-66.07	4.76	-61.31
3	21345.87	46.44 PK	74	-27.56	-53.58	4.76	-48.82
4	21330.06	34.97 AV	54	-19.03	-65.05	4.76	-60.29

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

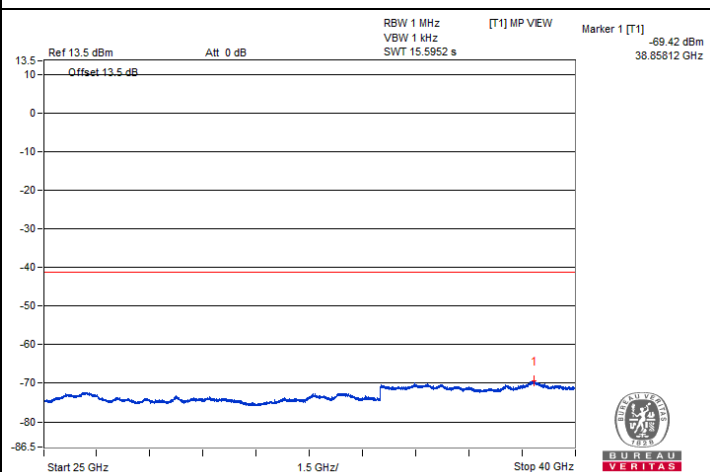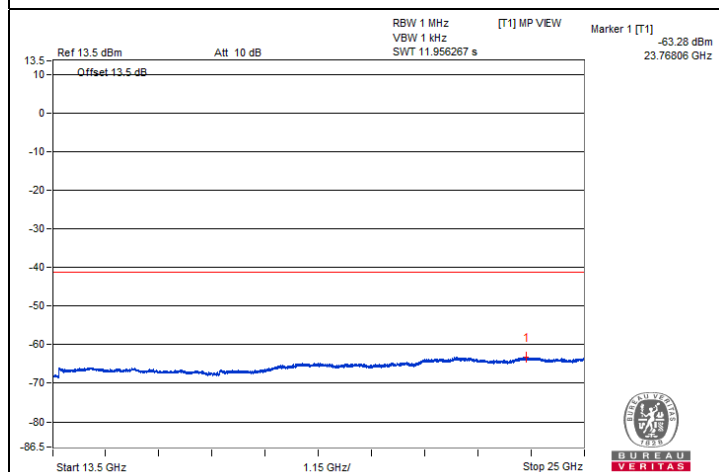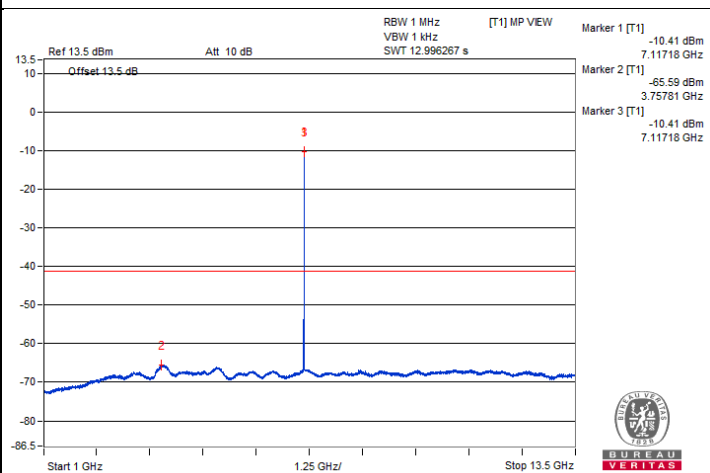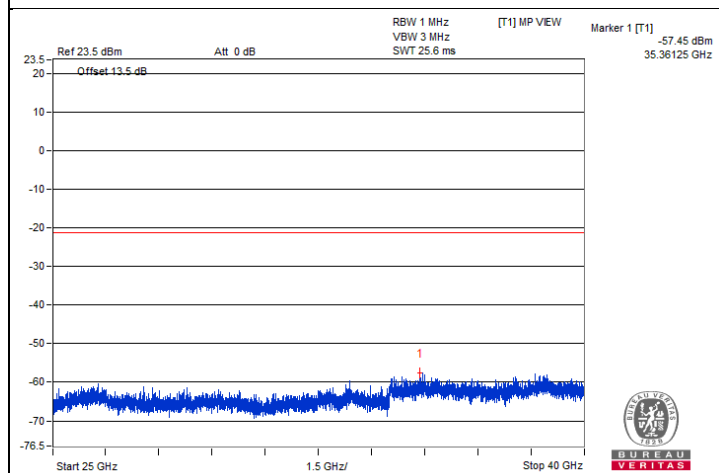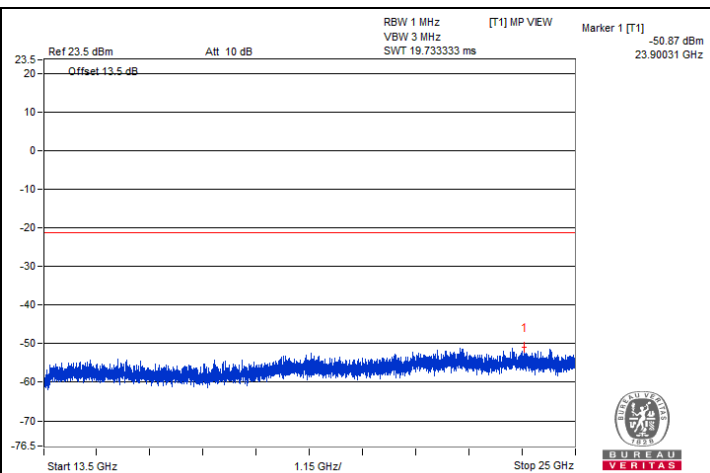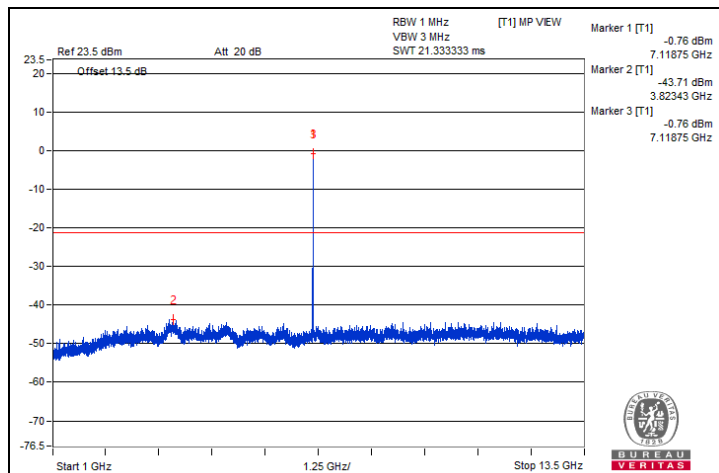


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	70.64 PK	88.2	-17.56	-28.71	4.09	-24.62
2	#7125	44.44 AV	68.2	-23.76	-54.91	4.09	-50.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

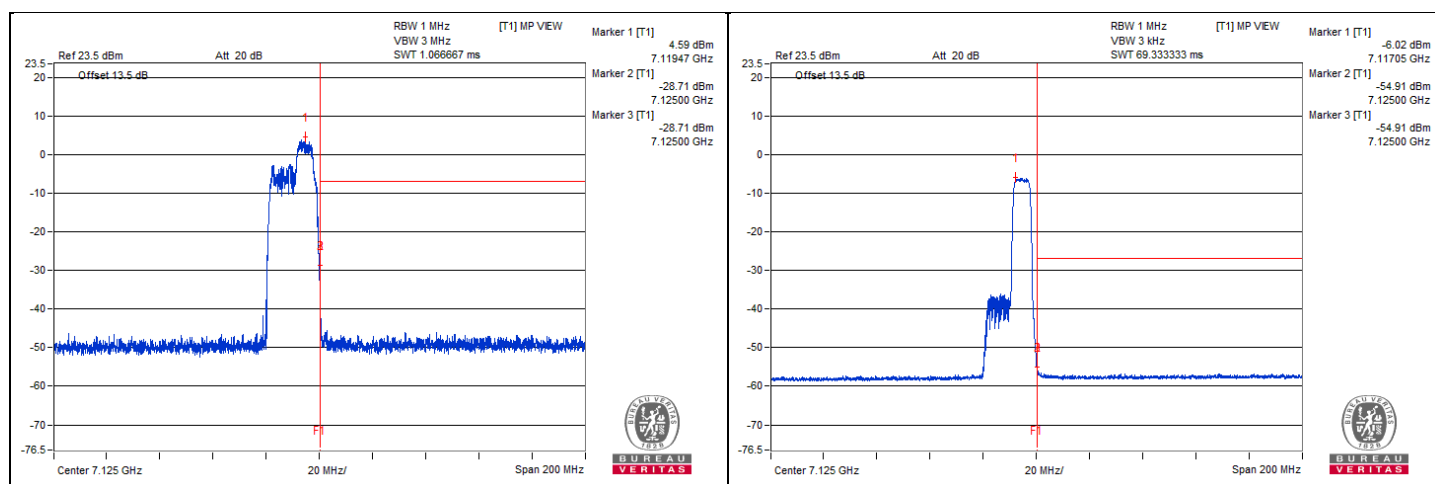


20 MHz Preamble 802.11be (RU26+106) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11906.25	52.2 PK	74	-21.8	-47.82	4.76	-43.06
2	11903.12	42.75 AV	54	-11.25	-57.27	4.76	-52.51
3	17857.06	45.04 PK	74	-28.96	-54.98	4.76	-50.22
4	17871.43	33.47 AV	54	-20.53	-66.55	4.76	-61.79

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

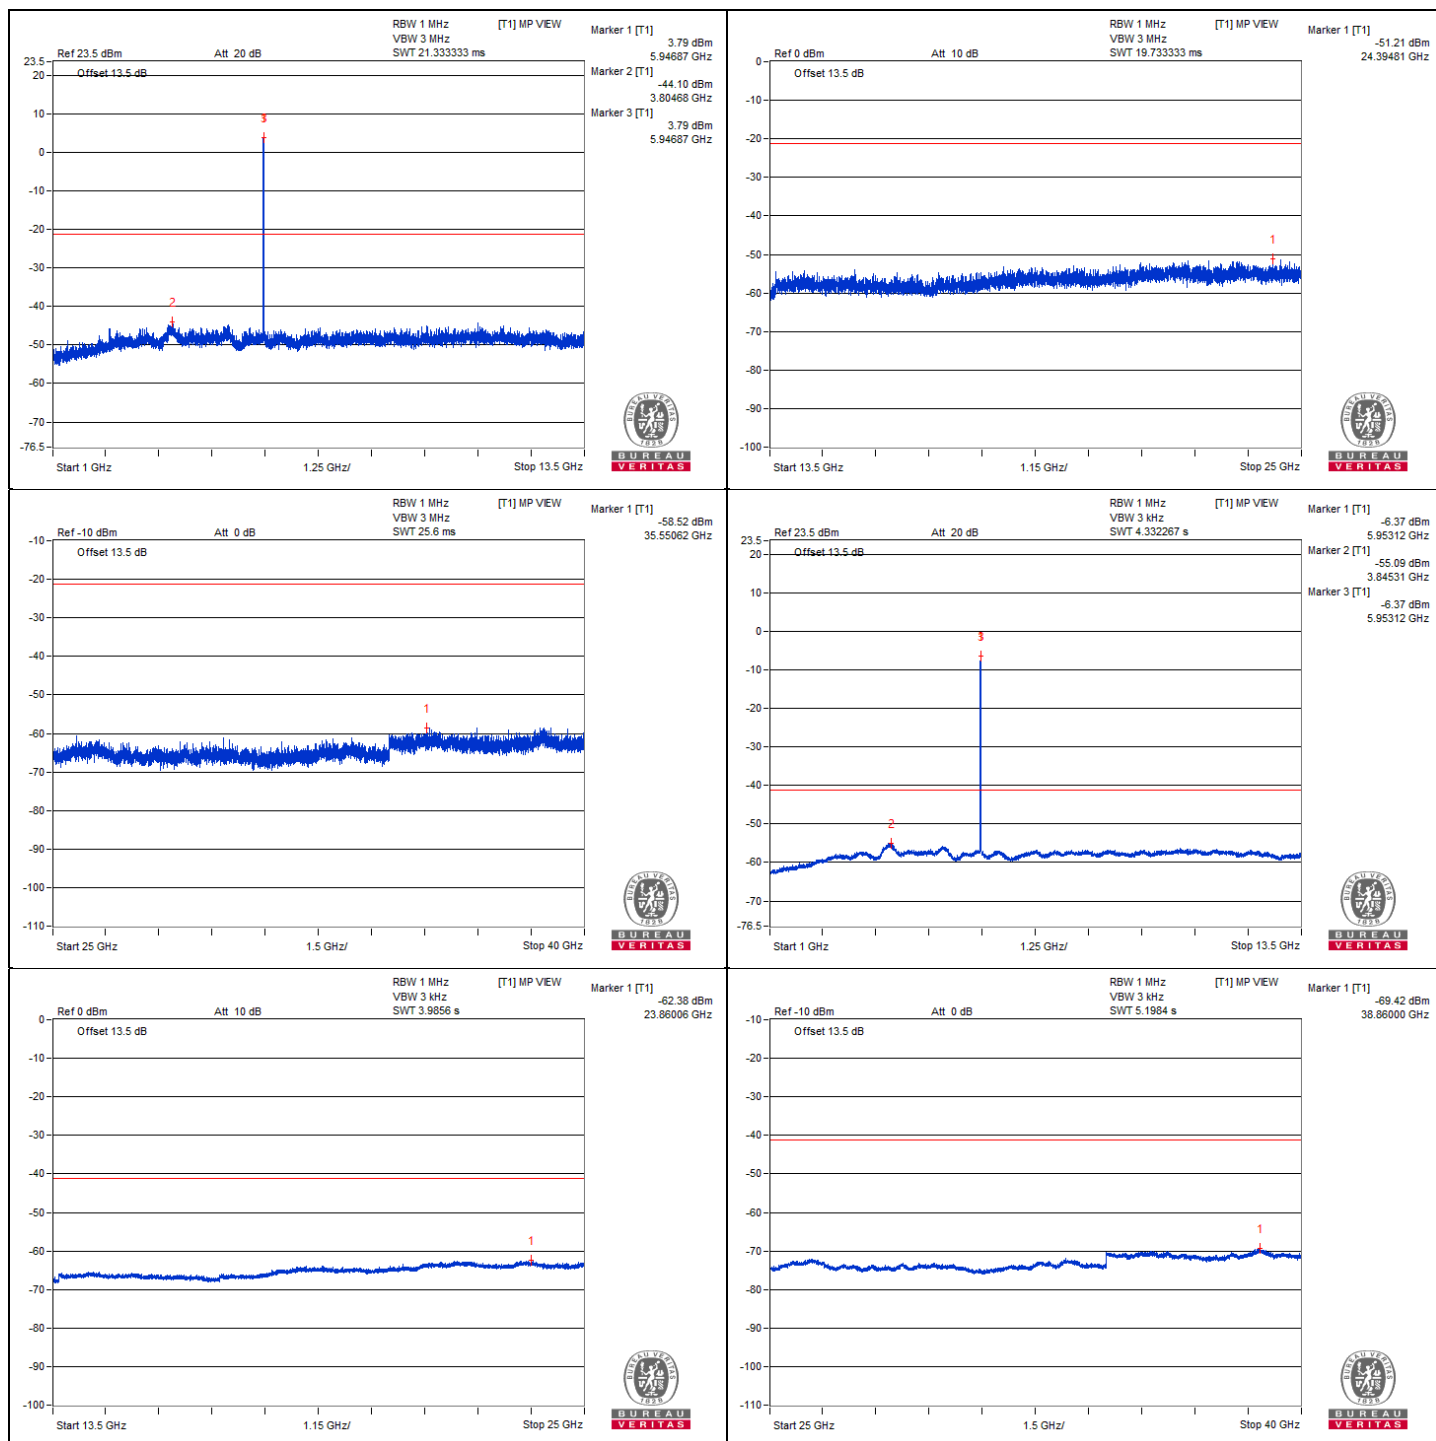


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5854.15	56.12 PK	88.2	-32.08	-43.9	4.76	-39.14
2	#5860.17	43.85 AV	68.2	-24.35	-56.17	4.76	-51.41

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

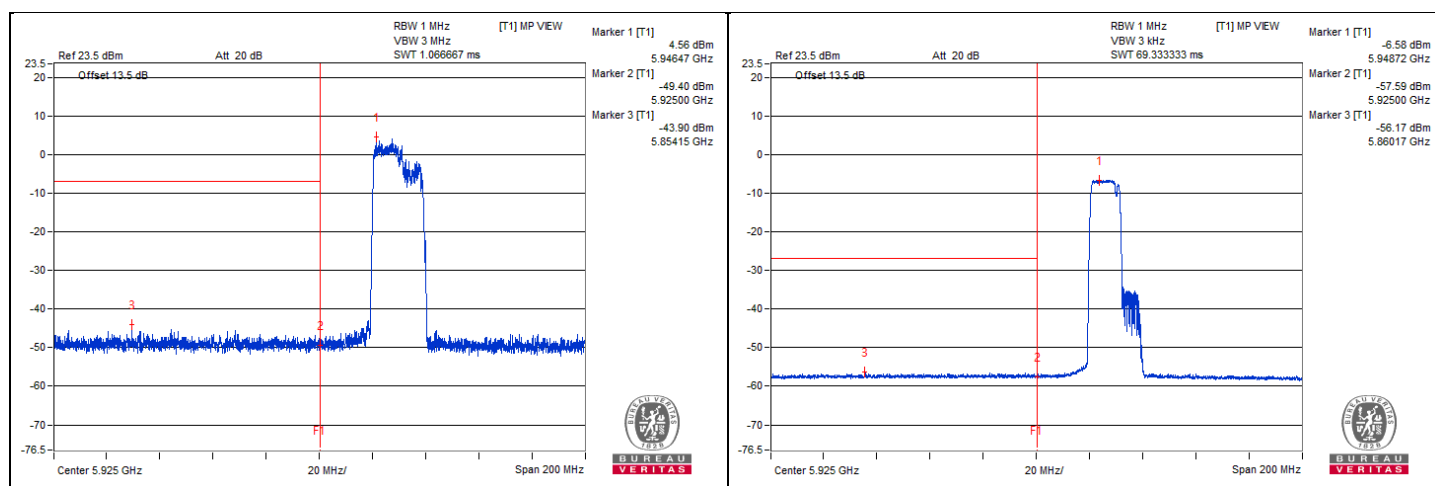


20 MHz Preamble 802.11be (RU26+106) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12820.31	52.05 PK	88.2	-36.15	-47.97	4.76	-43.21
2	#12832.81	42.18 AV	68.2	-26.02	-57.84	4.76	-53.08
3	19235.62	45.69 PK	74	-28.31	-54.33	4.76	-49.57
4	19254.31	35.39 AV	54	-18.61	-64.63	4.76	-59.87

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

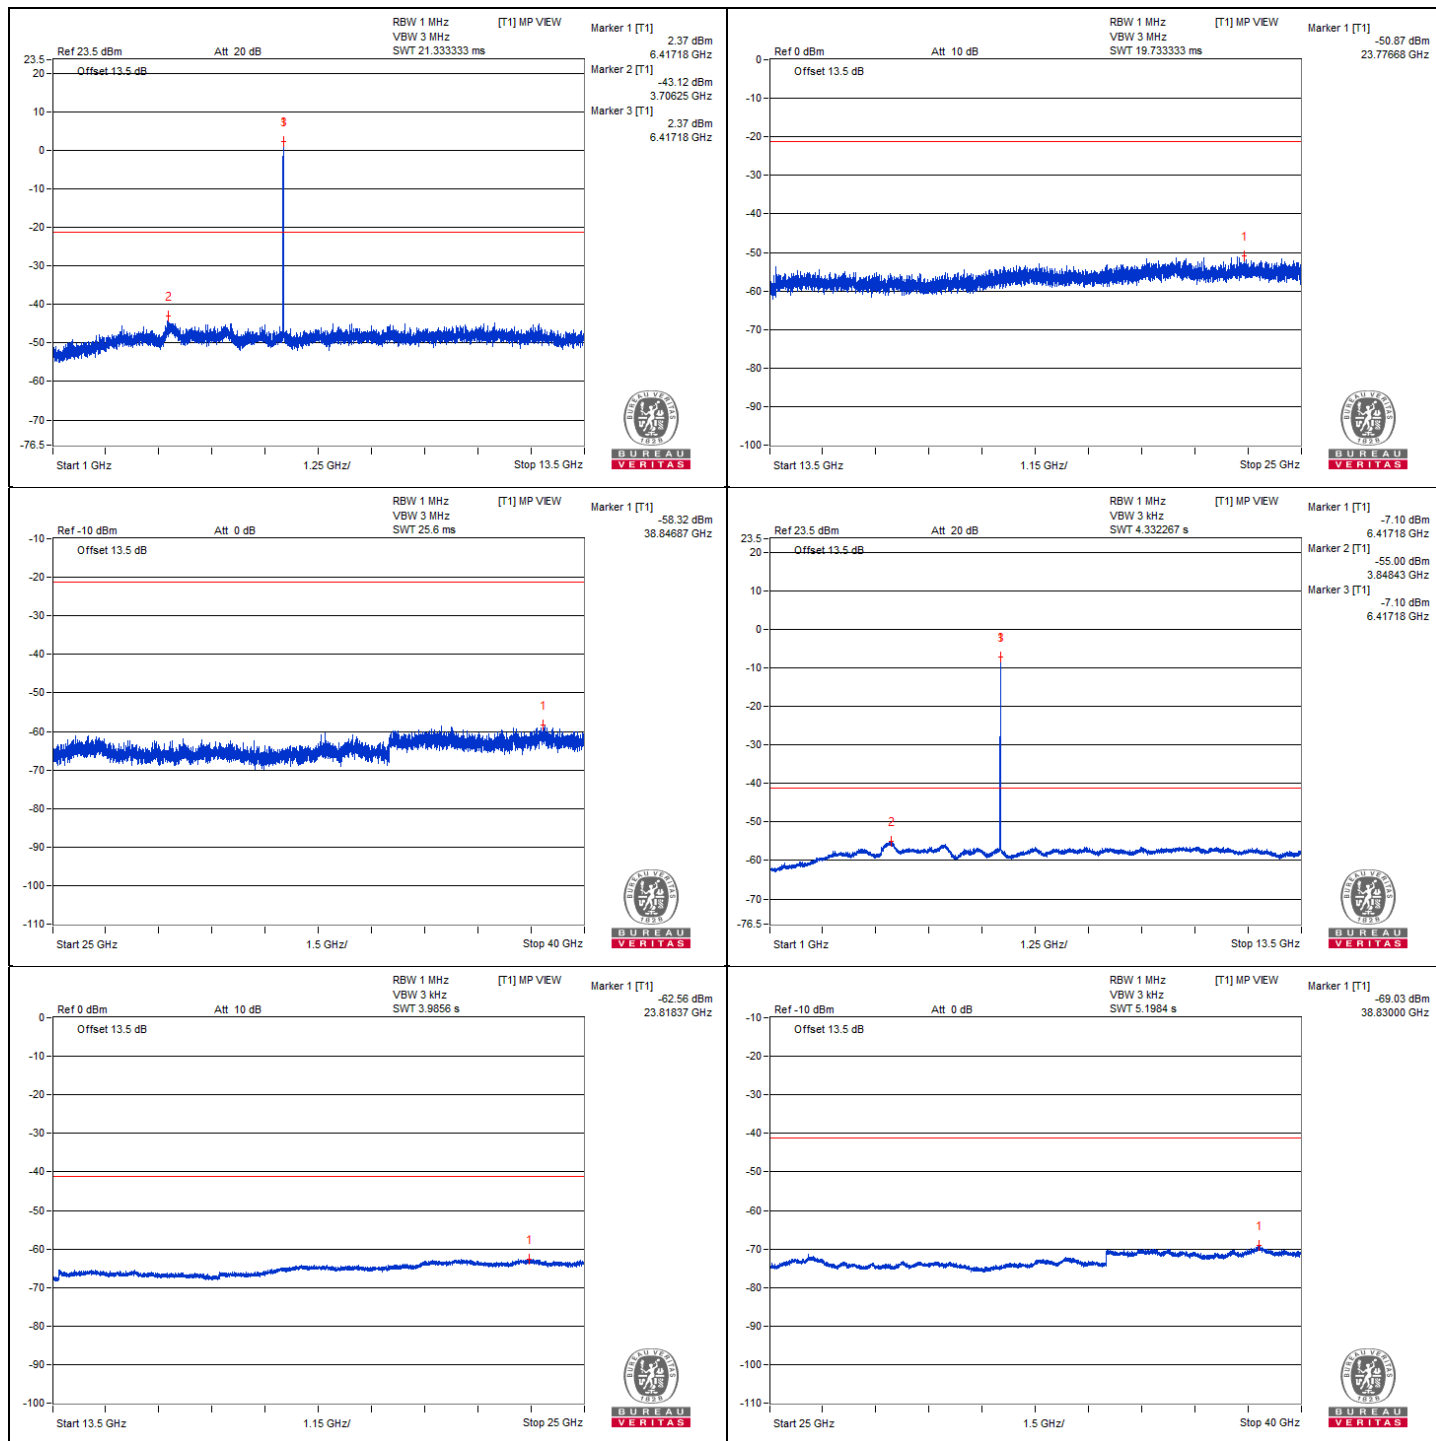


20 MHz Preamble 802.11be (RU26+106) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12871.87	52.64 PK	88.2	-35.56	-47.38	4.76	-42.62
2	#12871.87	41.9 AV	68.2	-26.3	-58.12	4.76	-53.36
3	19306.06	45.29 PK	74	-28.71	-54.73	4.76	-49.97
4	19314.68	35.5 AV	54	-18.5	-64.52	4.76	-59.76

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

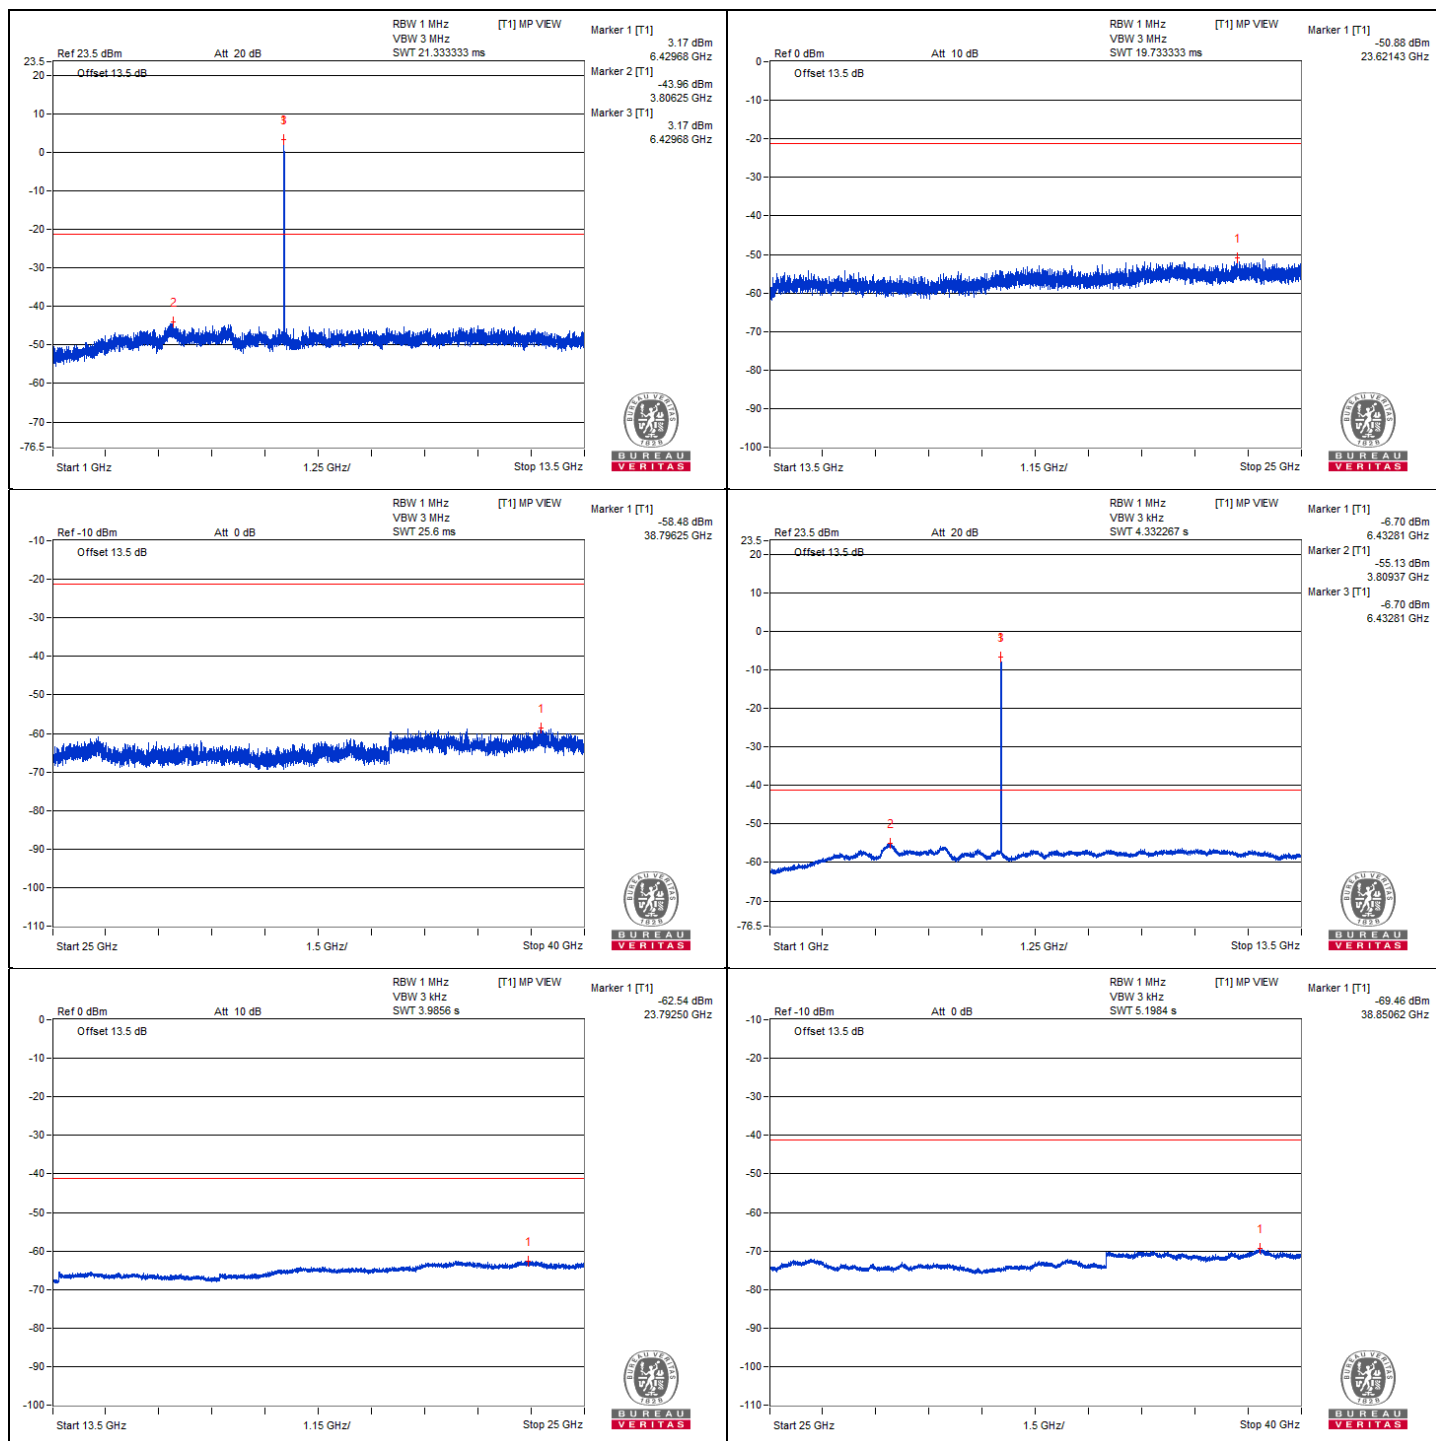







20 MHz Preamble 802.11be (RU26+106) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13075	51.97 PK	88.2	-36.23	-48.05	4.76	-43.29
2	#13062.5	42.07 AV	68.2	-26.13	-57.95	4.76	-53.19
3	19613.68	45.35 PK	74	-28.65	-54.67	4.76	-49.91
4	19610.81	34.99 AV	54	-19.01	-65.03	4.76	-60.27

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

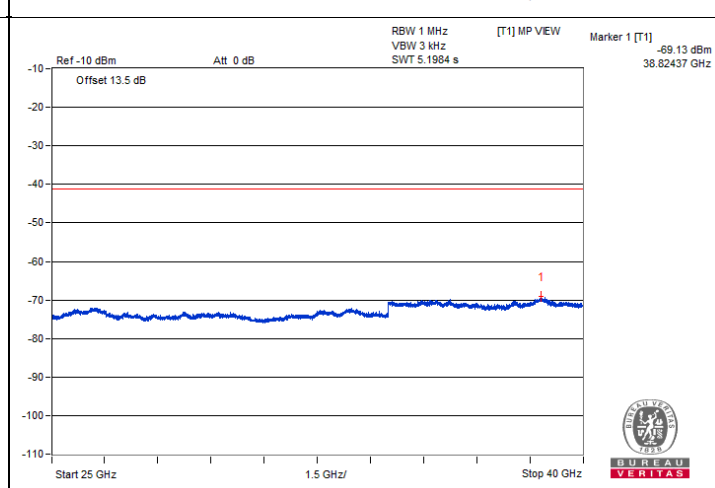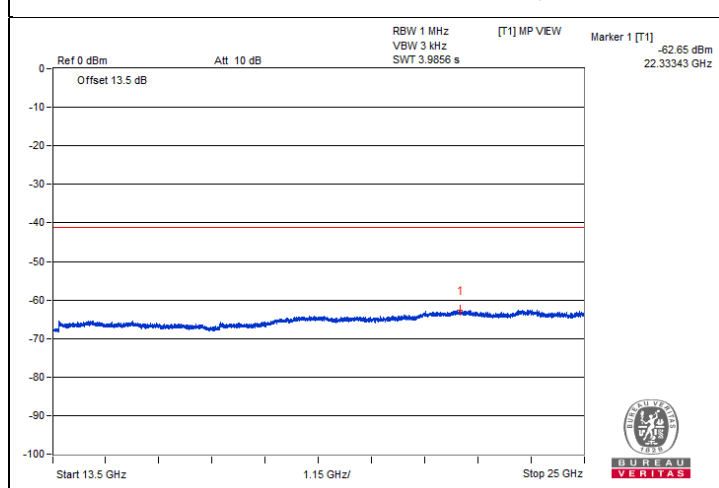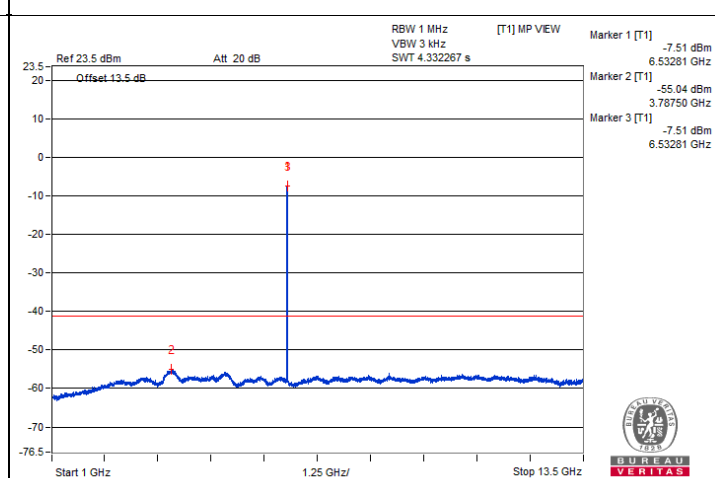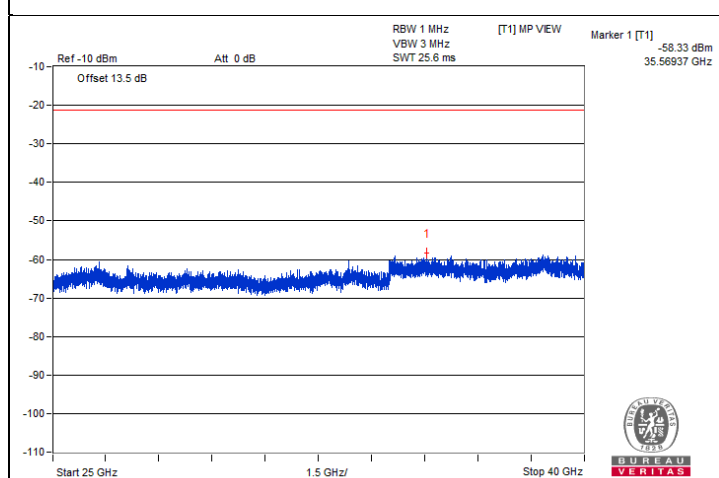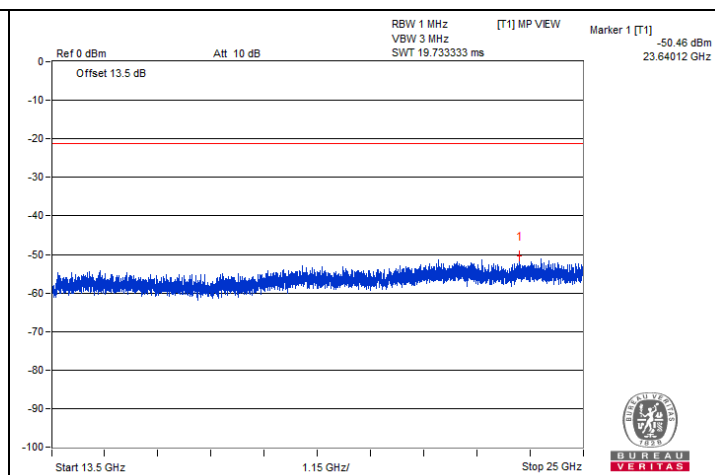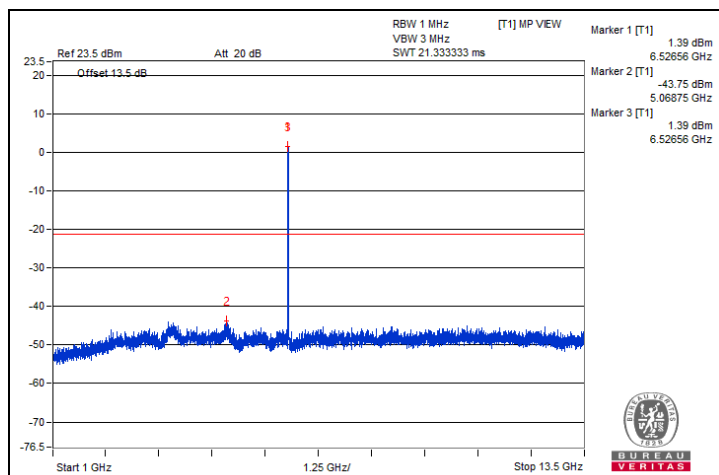


20 MHz Preamble 802.11be (RU26+106) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13708.43	43.99 PK	88.2	-44.21	-56.03	4.76	-51.27
2	#13702.68	33.83 AV	68.2	-34.37	-66.19	4.76	-61.43
3	20558.12	44.96 PK	74	-29.04	-55.06	4.76	-50.30
4	20572.5	35.26 AV	54	-18.74	-64.76	4.76	-60.00

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

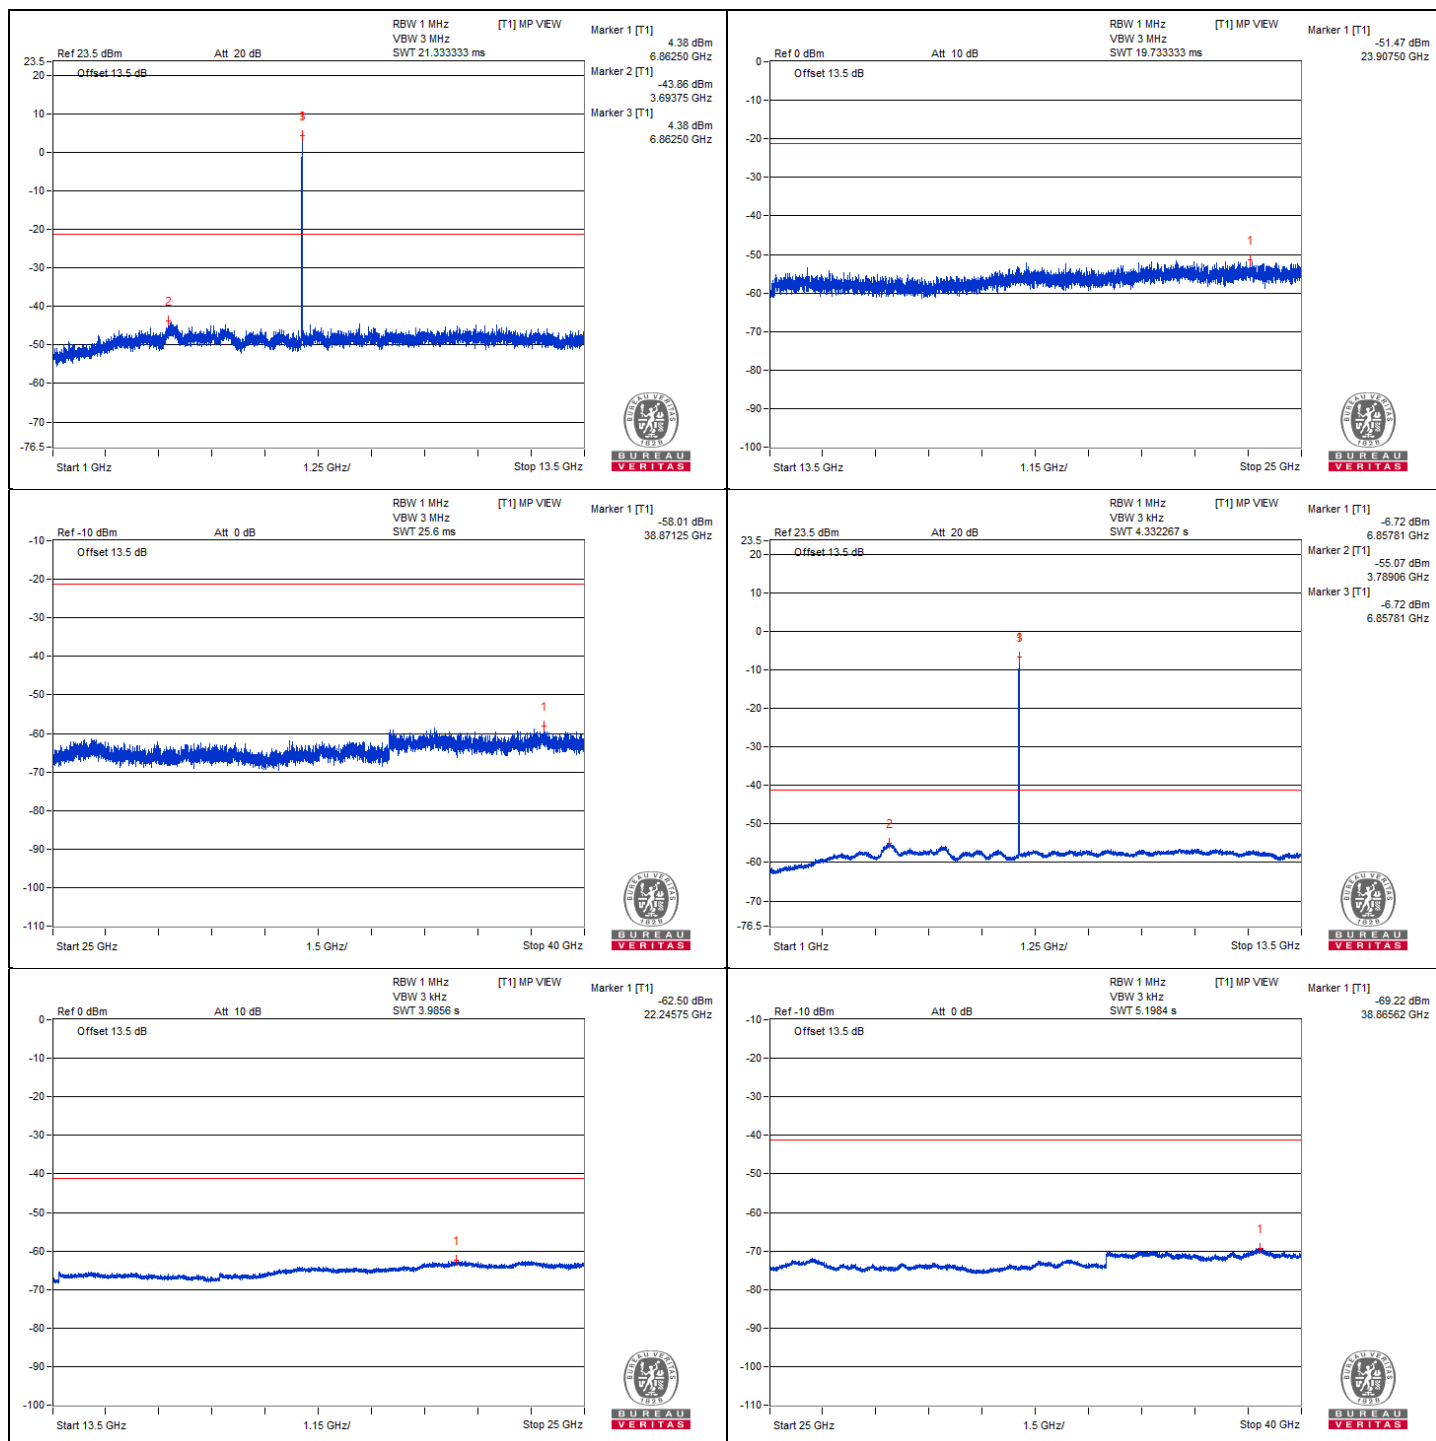


20 MHz Preamble 802.11be (RU26+106) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14246.06	45.31 PK	88.2	-42.89	-54.71	4.76	-49.95
2	#14225.93	34.42 AV	68.2	-33.78	-65.6	4.76	-60.84
3	21345.87	45.43 PK	74	-28.57	-54.59	4.76	-49.83
4	21341.56	35.57 AV	54	-18.43	-64.45	4.76	-59.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

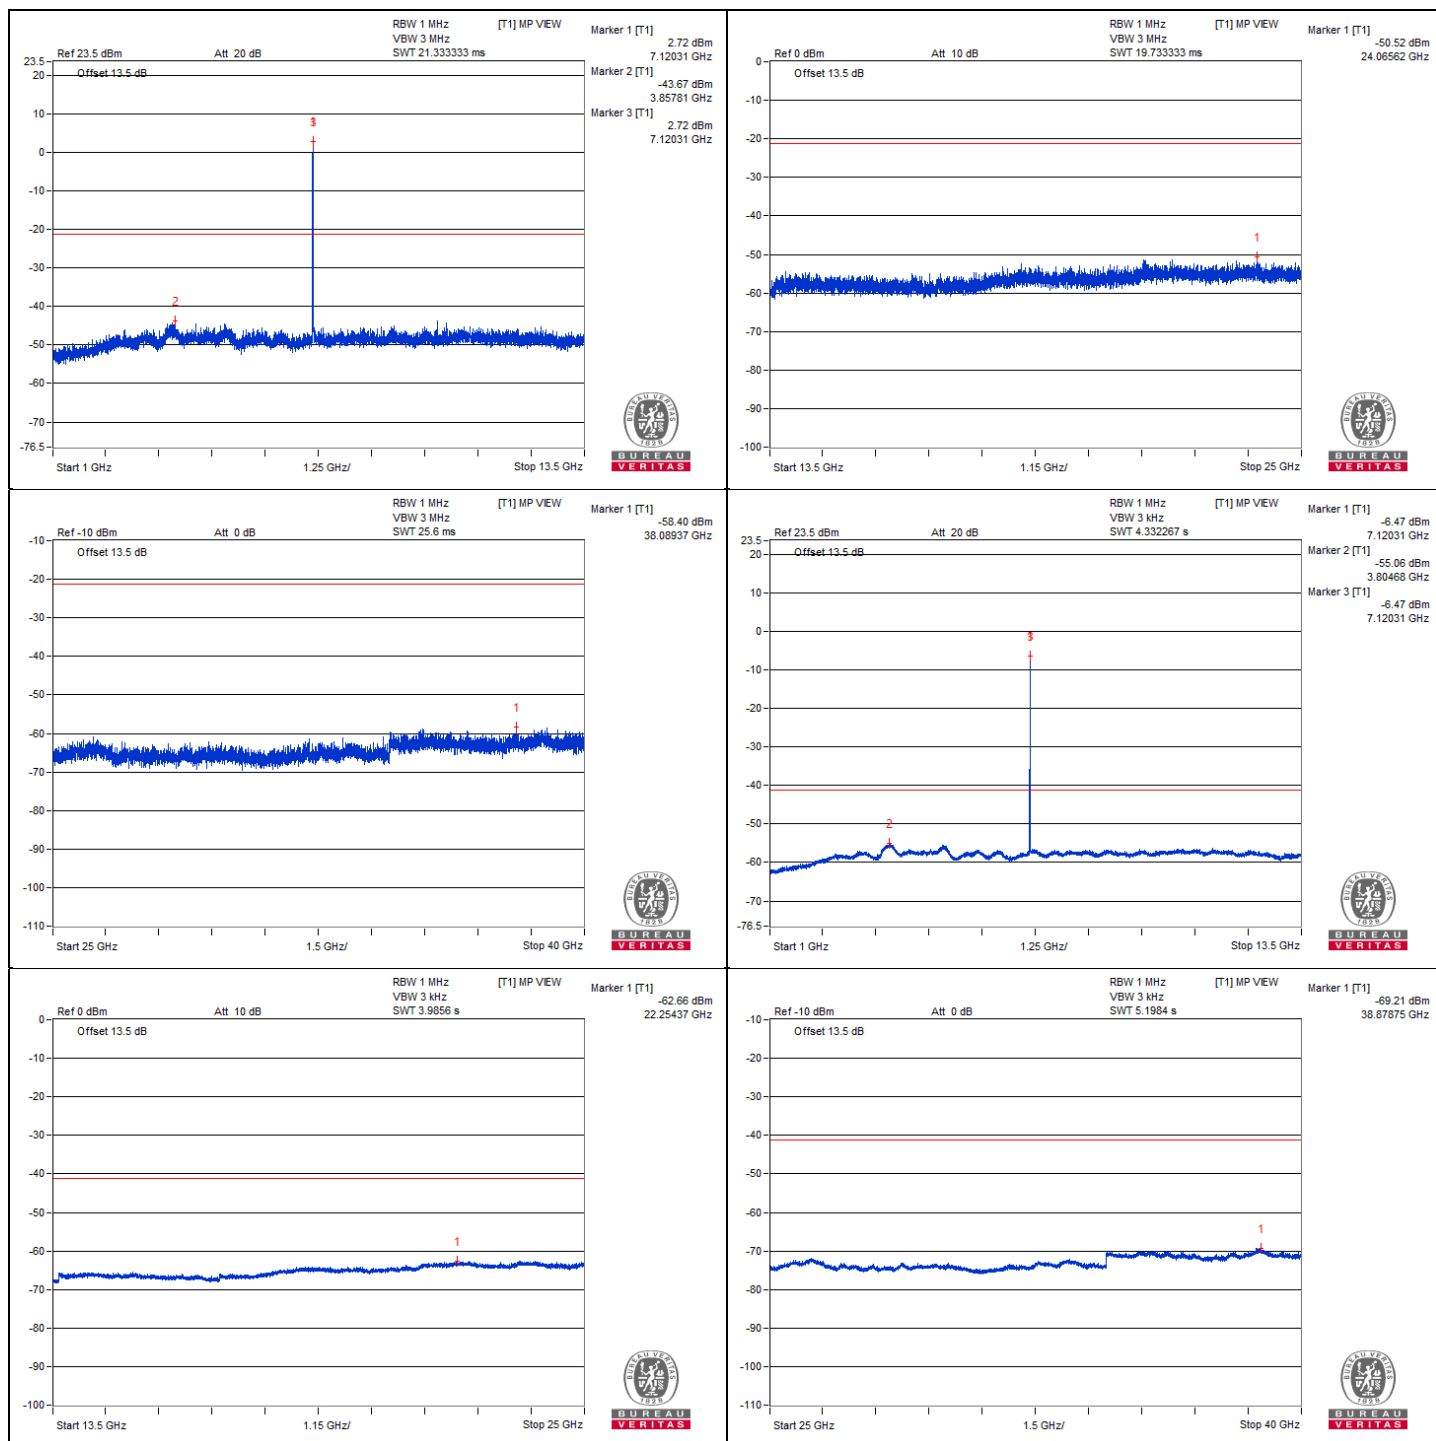


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	62.45 PK	88.2	-25.75	-36.9	4.09	-32.81
2	#7125	44.44 AV	68.2	-23.76	-54.91	4.09	-50.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

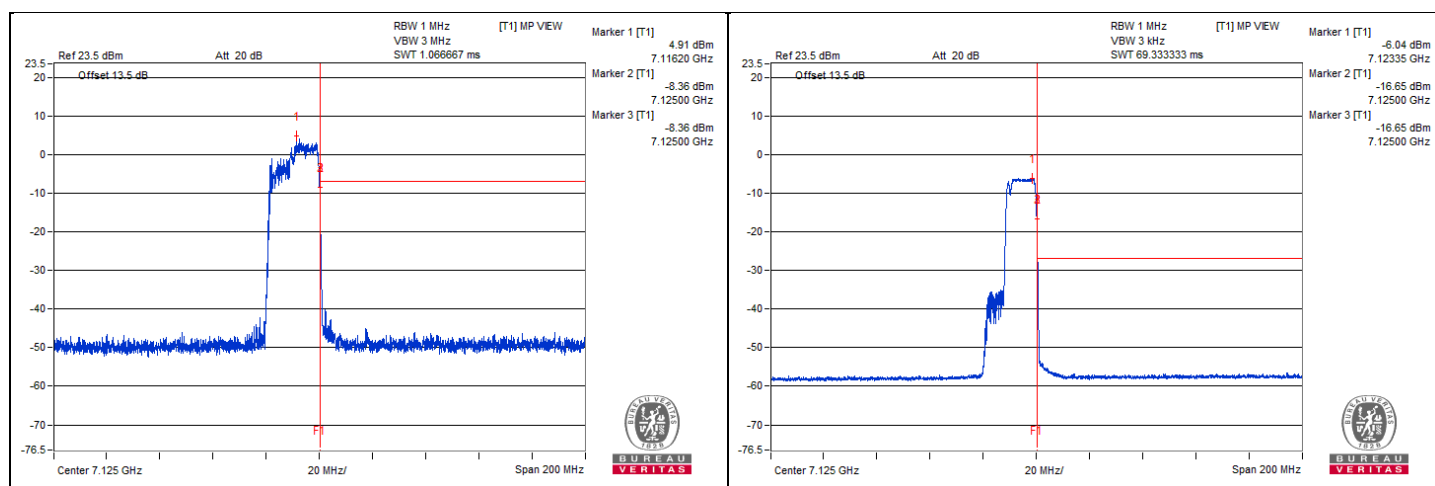







80 MHz Preamble 802.11be (RU484+242) - Channel 7

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11973.43	52 PK	74	-22	-48.02	4.76	-43.26
2	11968.75	42.66 AV	54	-11.34	-57.36	4.76	-52.60
3	17962	42.65 PK	74	-31.35	-57.37	4.76	-52.61
4	17954.81	33.93 AV	54	-20.07	-66.09	4.76	-61.33

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

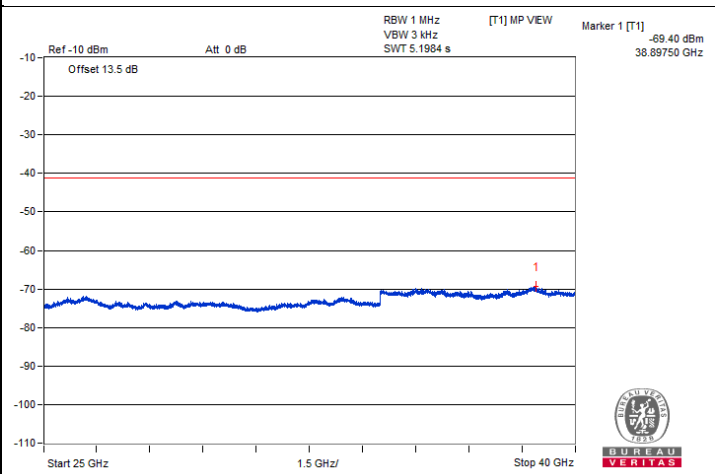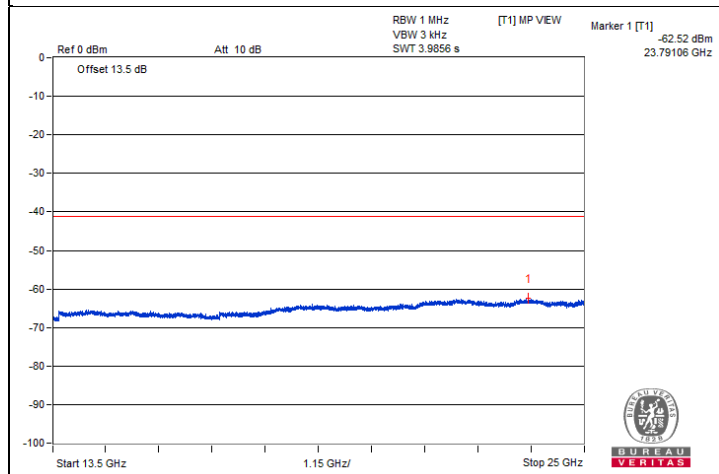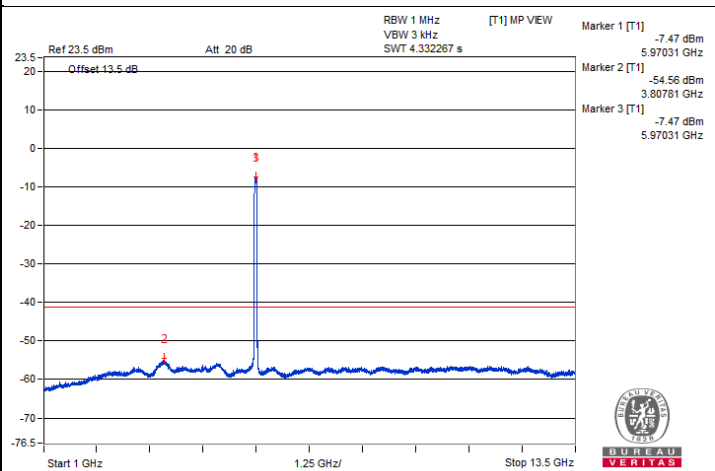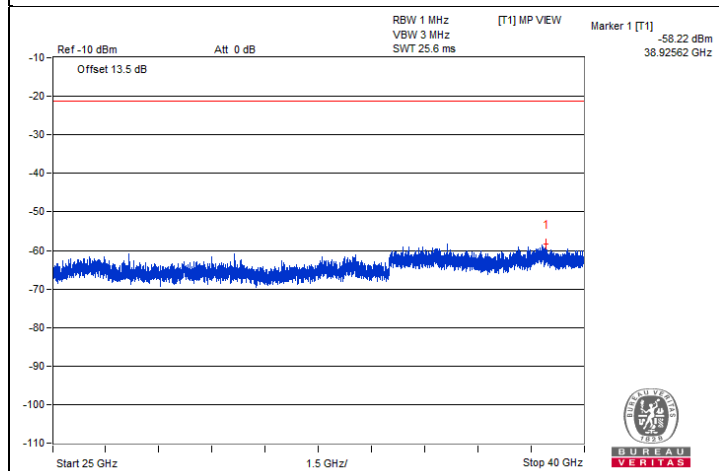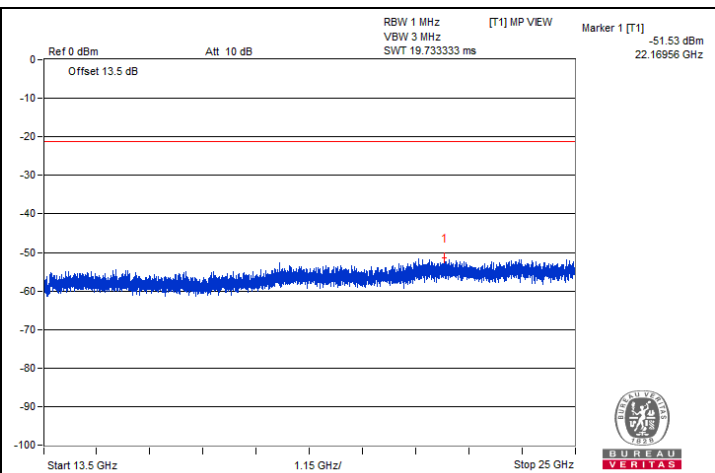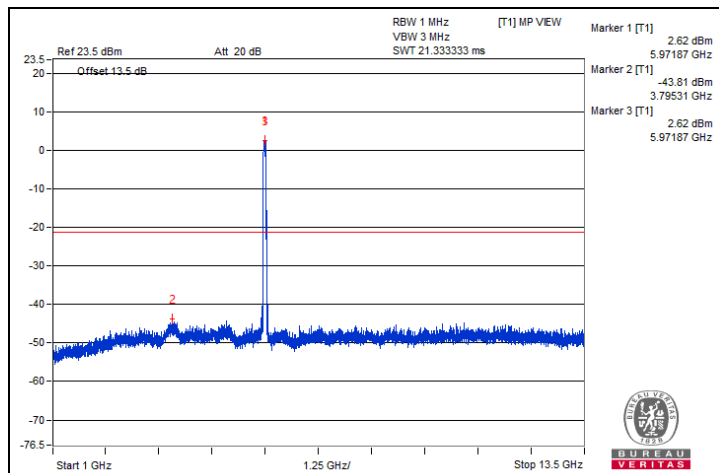


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5922.97	61.27 PK	88.2	-26.93	-38.75	4.76	-33.99
2	#5924.62	45.8 AV	68.2	-22.4	-54.22	4.76	-49.46

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

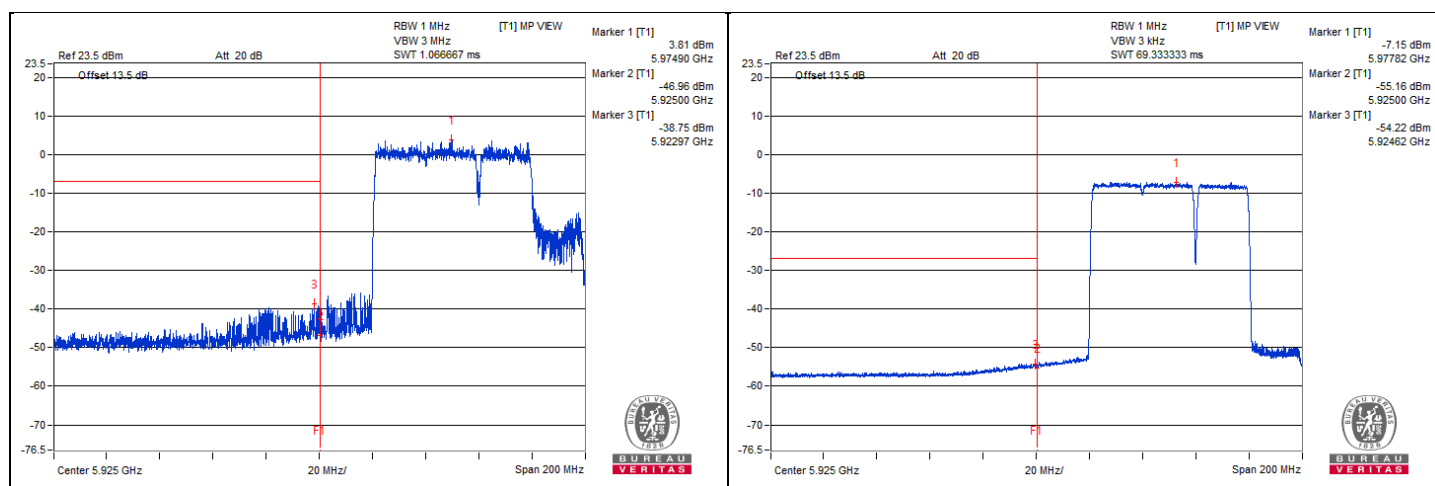


80 MHz Preamble 802.11be (RU484+242) - Channel 87

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12764.06	52.93 PK	88.2	-35.27	-47.09	4.76	-42.33
2	#12760.93	42.46 AV	68.2	-25.74	-57.56	4.76	-52.80
3	19150.81	45.29 PK	74	-28.71	-54.73	4.76	-49.97
4	19152.25	35.55 AV	54	-18.45	-64.47	4.76	-59.71

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

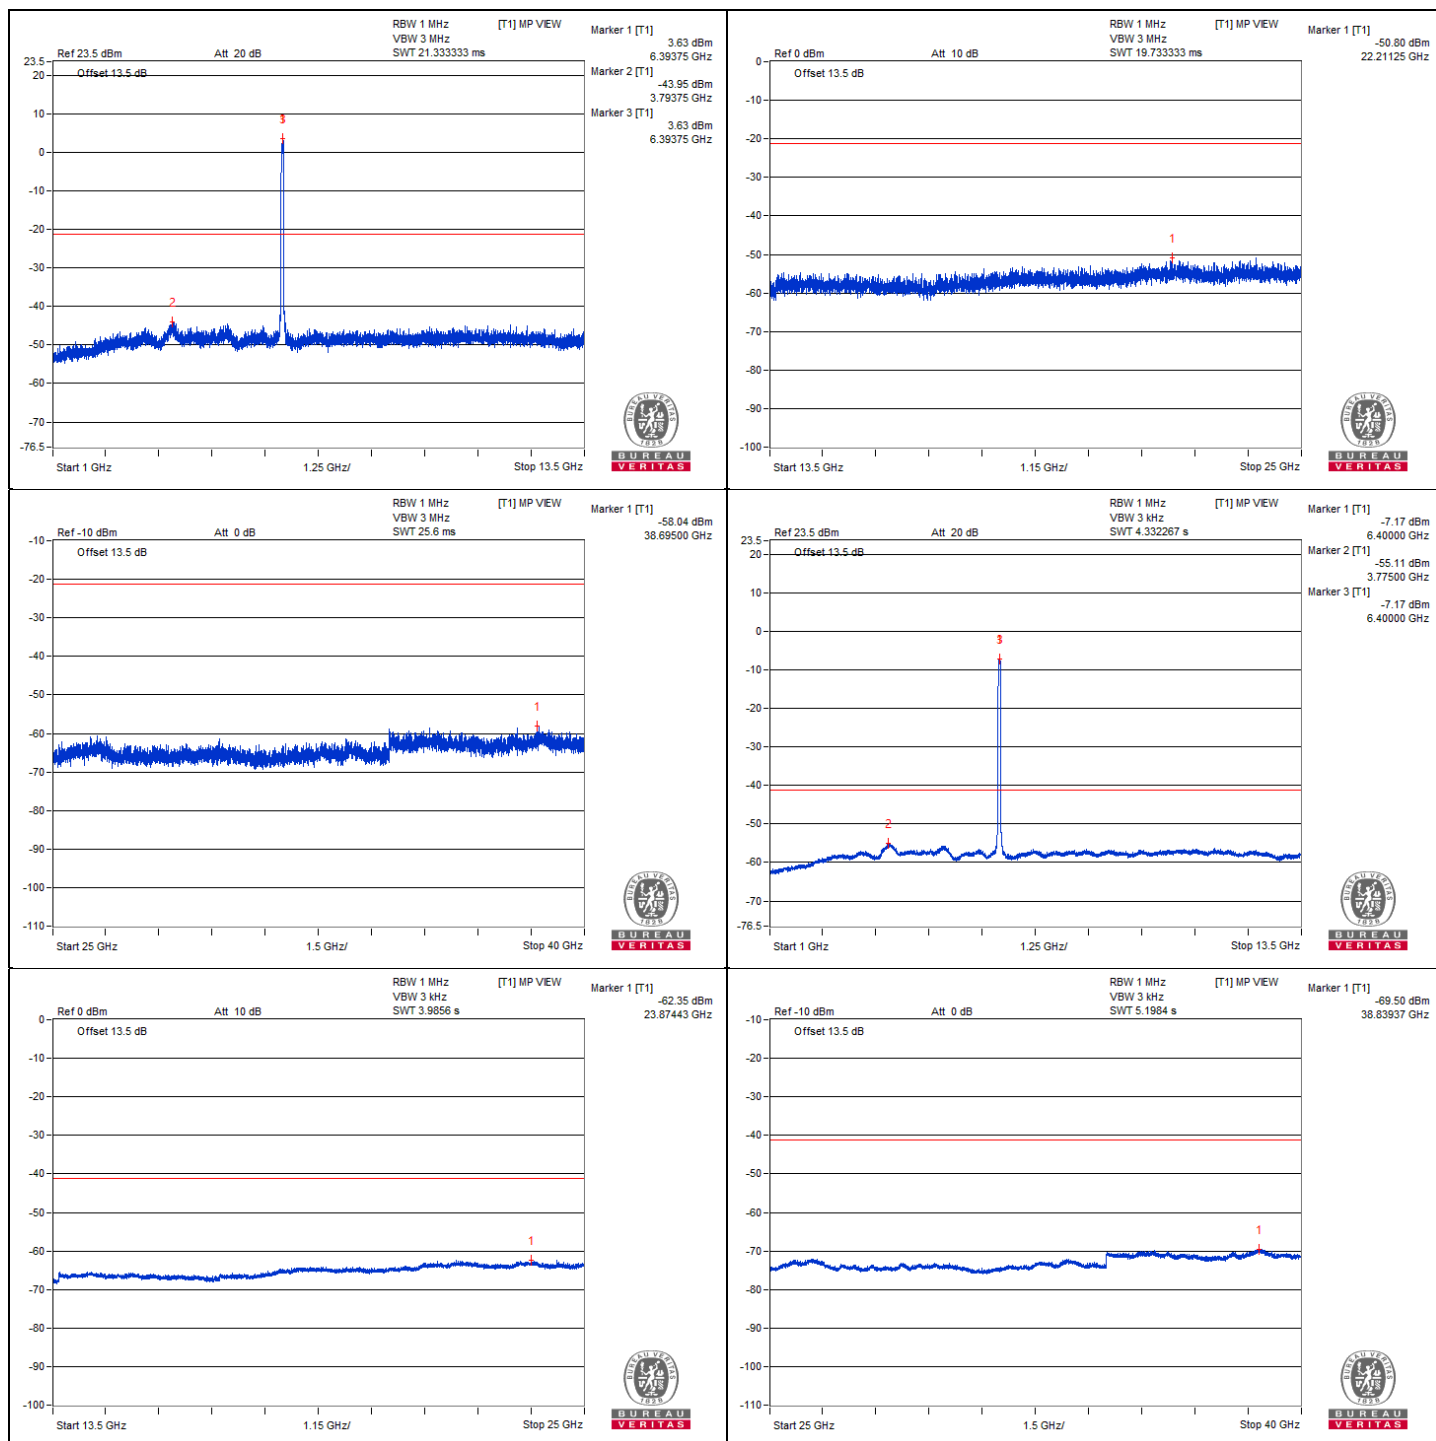







80 MHz Preamble 802.11be (RU484+242) - Channel 103

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12928.12	52.12 PK	88.2	-36.08	-47.9	4.76	-43.14
2	#12931.25	41.51 AV	68.2	-26.69	-58.51	4.76	-53.75
3	19395.18	45.5 PK	74	-28.5	-54.52	4.76	-49.76
4	19392.31	35.31 AV	54	-18.69	-64.71	4.76	-59.95

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

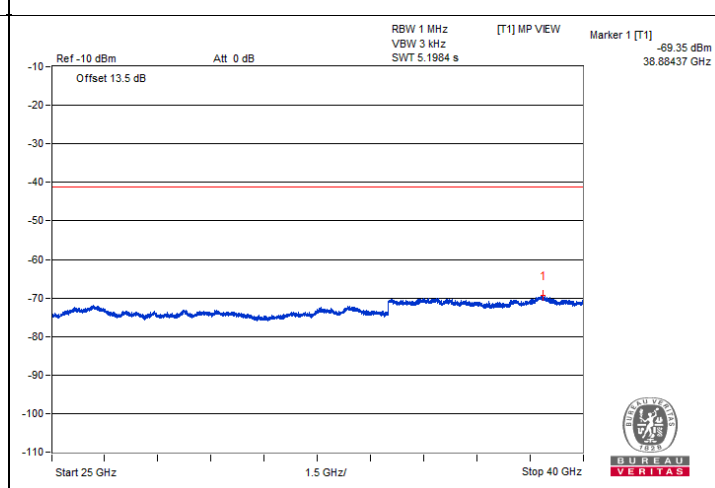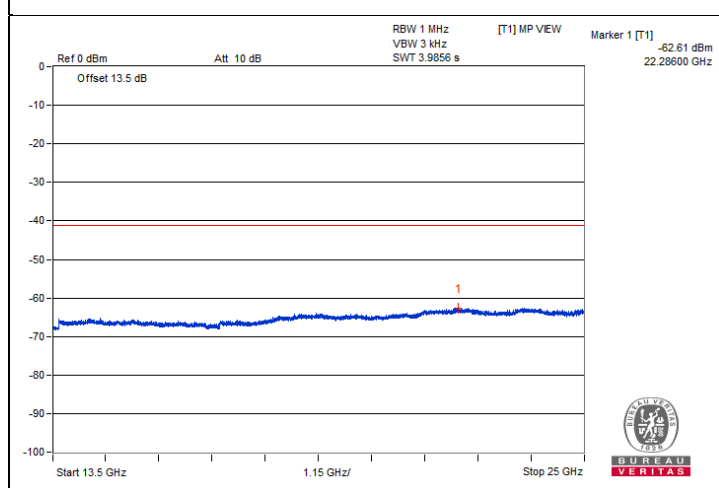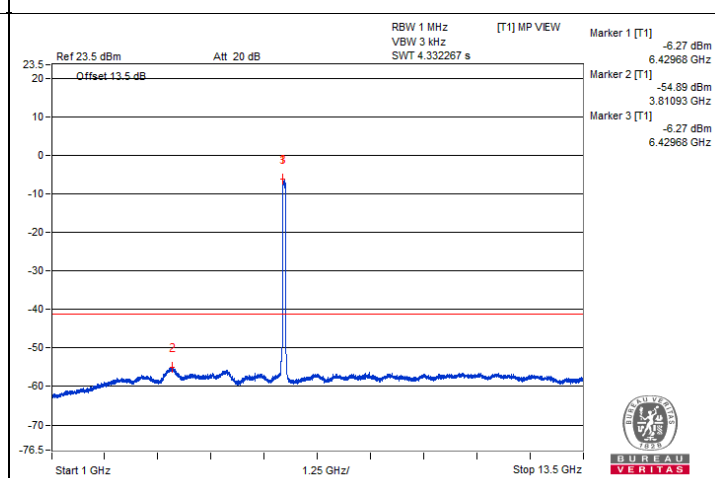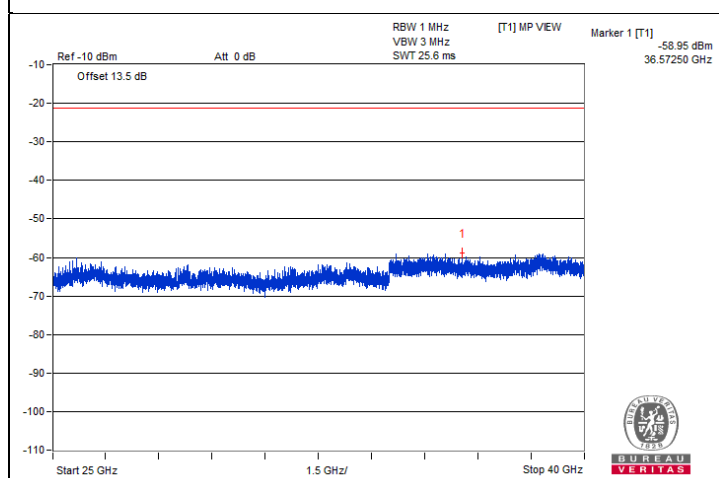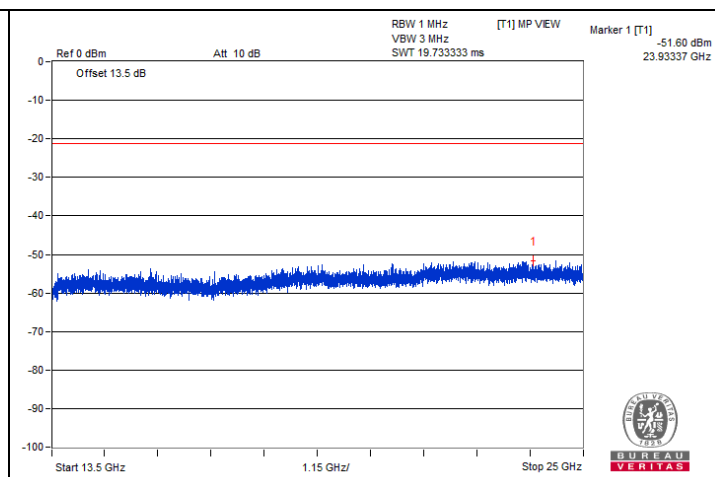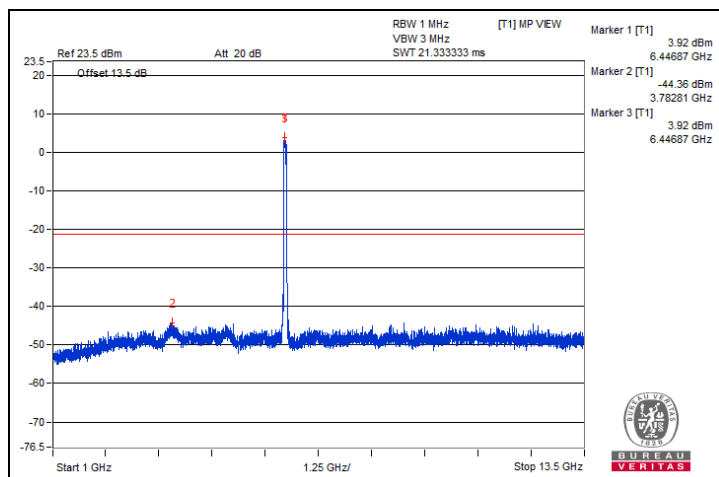


80 MHz Preamble 802.11be (RU484+242) - Channel 135

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13254.68	53.6 PK	74	-20.4	-46.42	4.76	-41.66
2	#13248.43	42.23 AV	68.2	-25.97	-57.79	4.76	-53.03
3	19865.25	44.23 PK	74	-29.77	-55.79	4.76	-51.03
4	19871	35.32 AV	54	-18.68	-64.7	4.76	-59.94

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

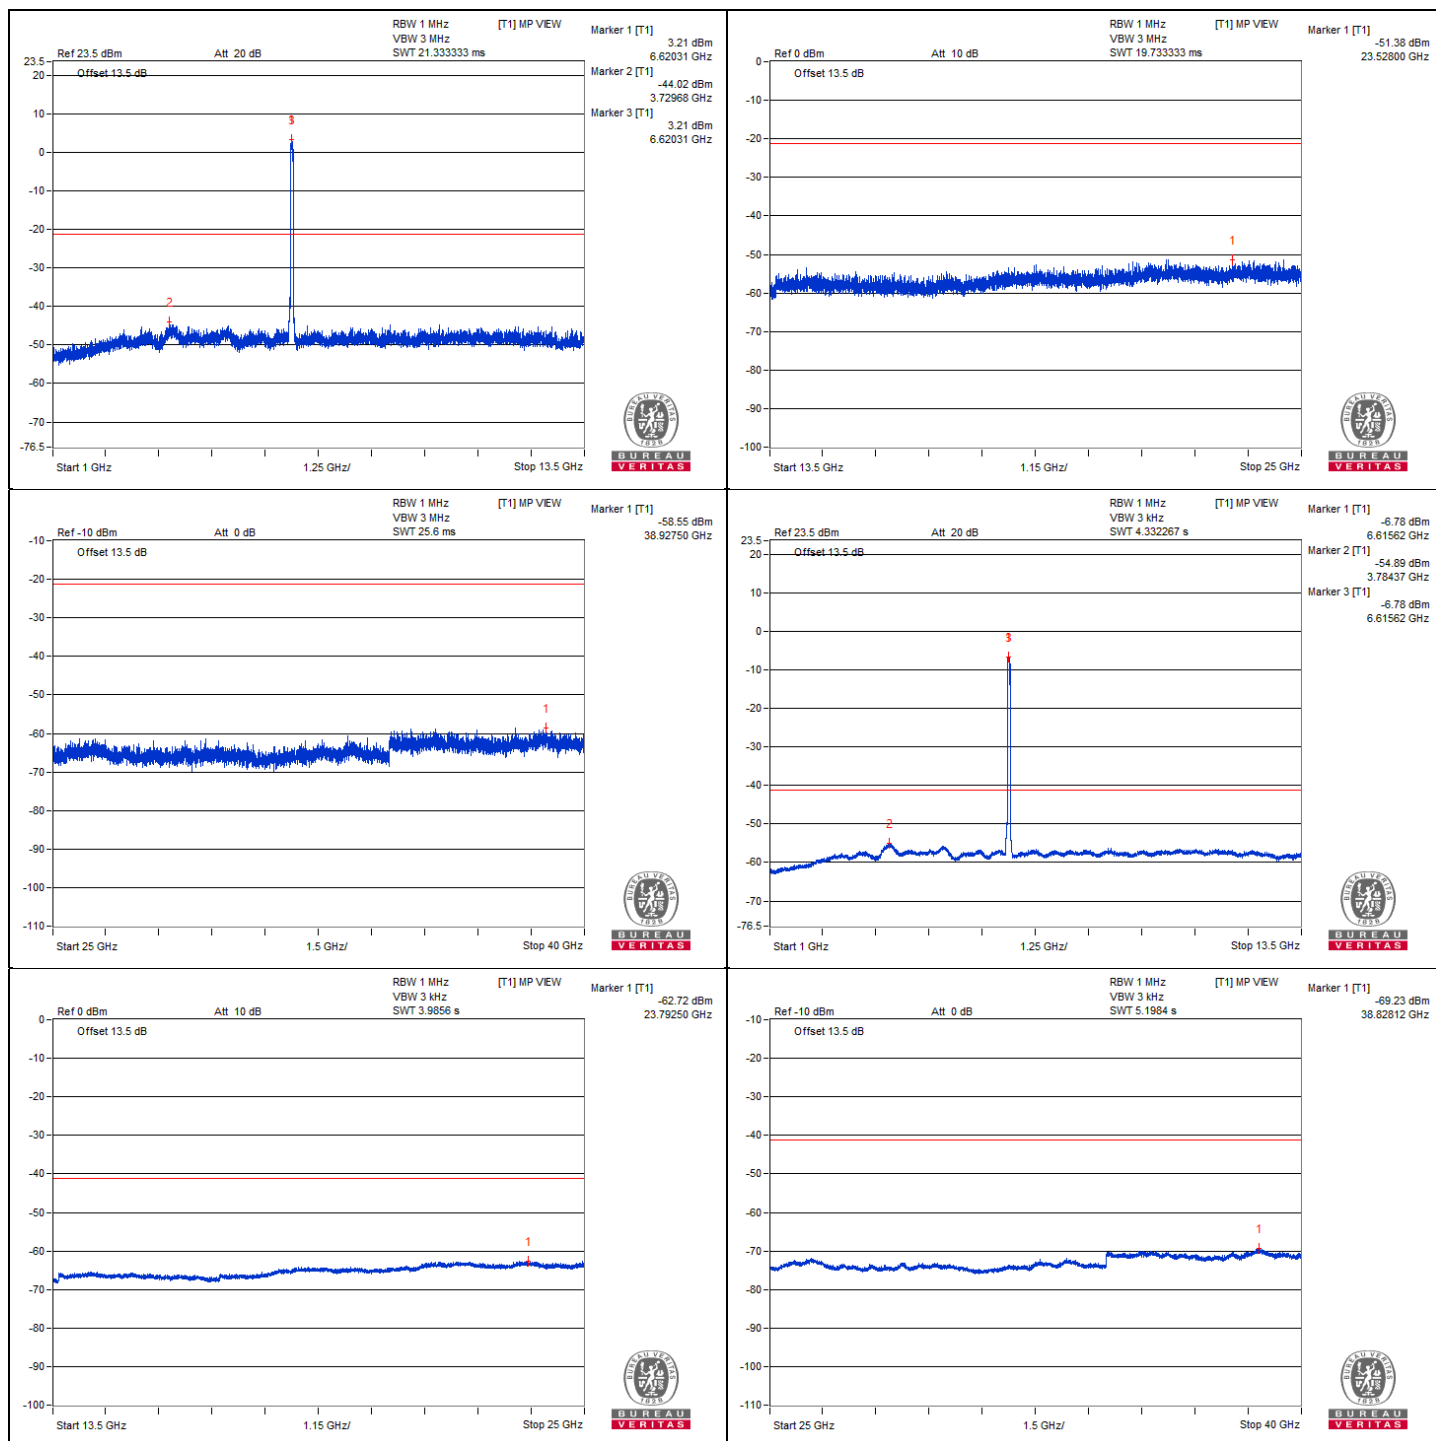


80 MHz Preamble 802.11be (RU484+242) - Channel 215

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14053.43	43.25 PK	88.2	-44.95	-56.77	4.76	-52.01
2	#14044.81	34.03 AV	68.2	-34.17	-65.99	4.76	-61.23
3	21072.75	46.21 PK	74	-27.79	-53.81	4.76	-49.05
4	21075.62	35.71 AV	54	-18.29	-64.31	4.76	-59.55

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

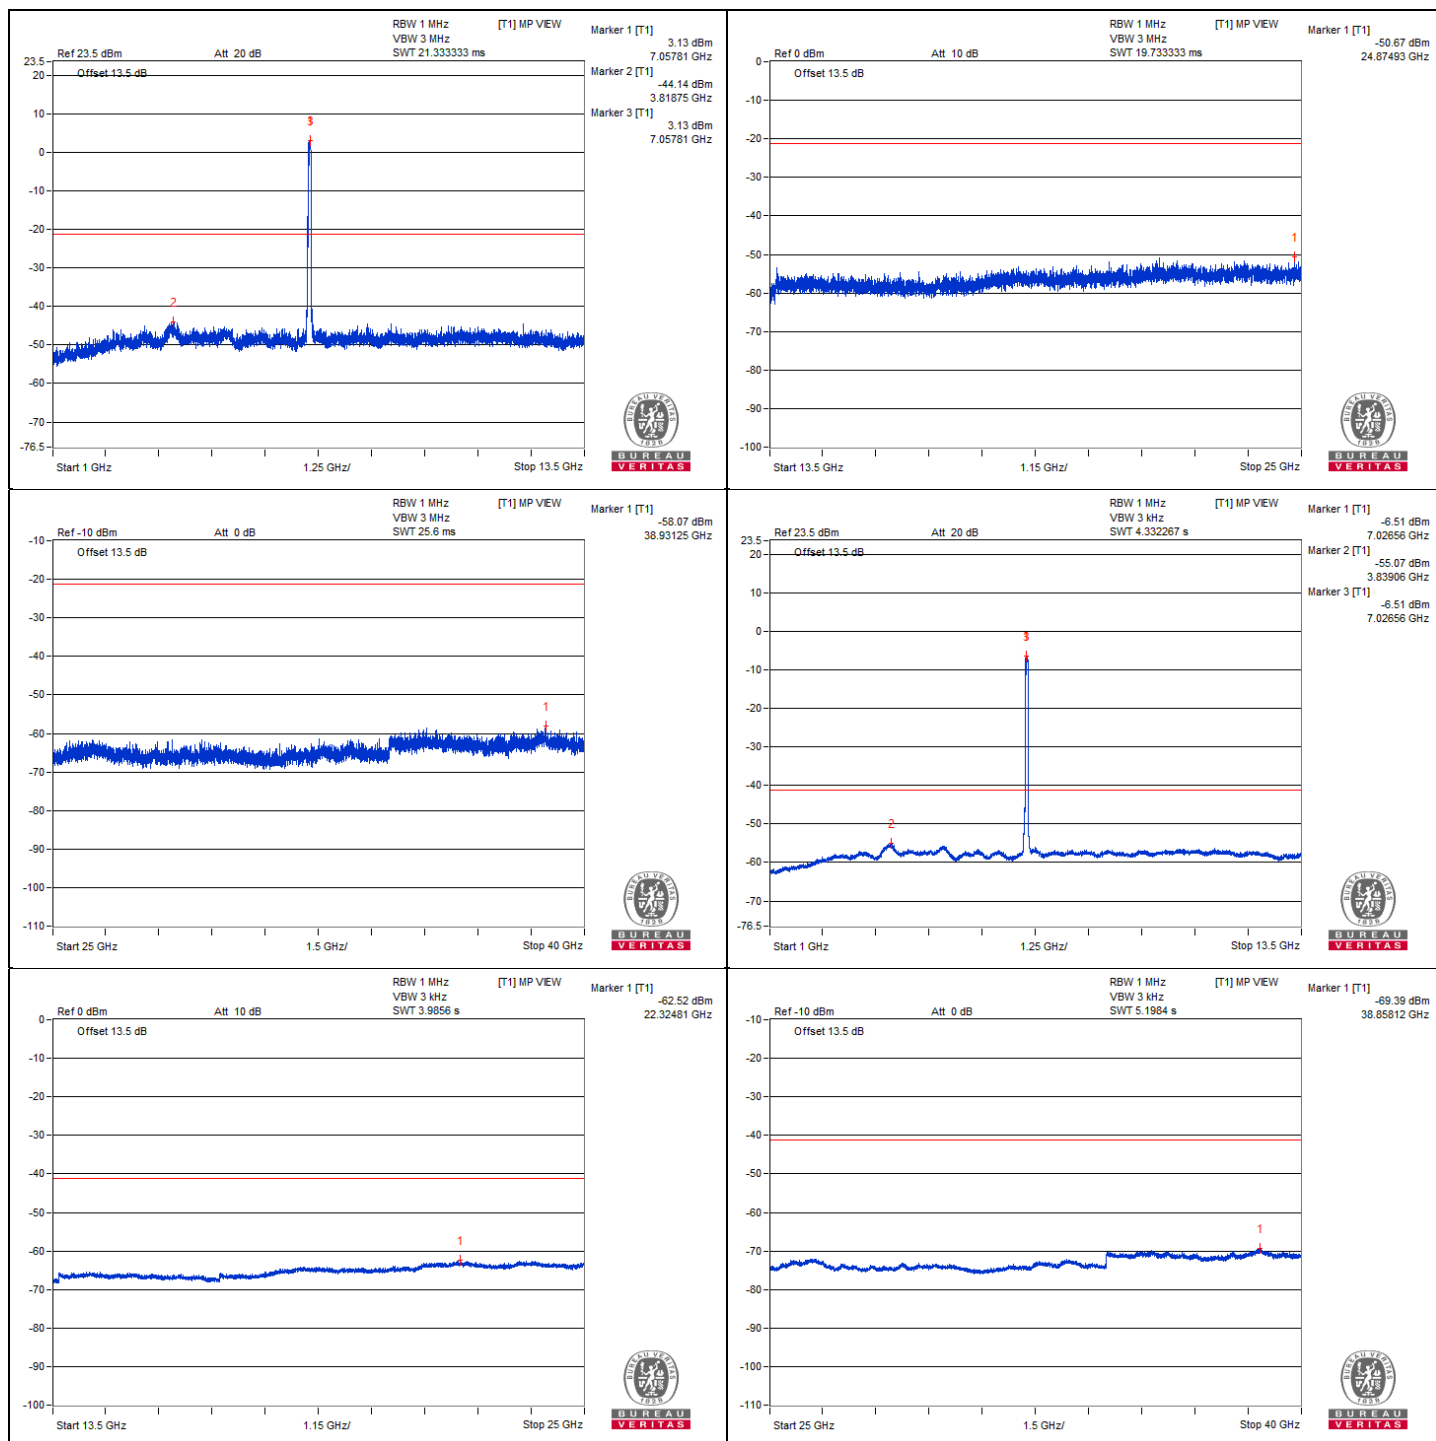


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7165.1	54.37 PK	88.2	-33.83	-44.98	4.09	-40.89
2	#7185.25	42.96 AV	68.2	-25.24	-56.39	4.09	-52.30

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

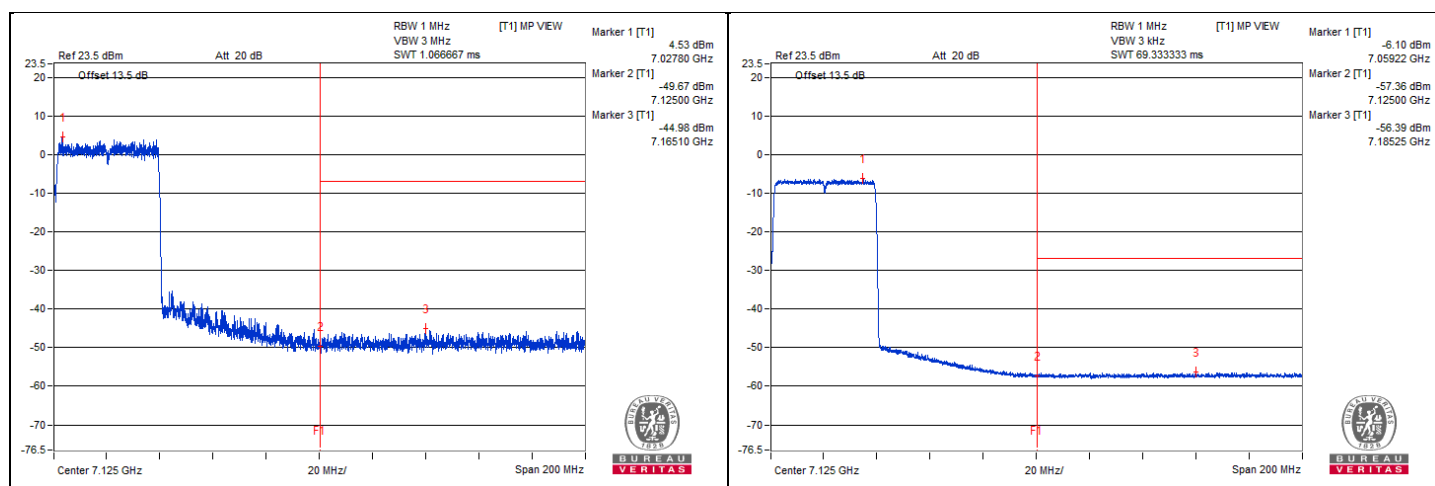







160 MHz Preamble 802.11be (RU996+484) - Channel 15

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12043.75	53.32 PK	74	-20.68	-46.7	4.76	-41.94
2	12043.75	42.05 AV	54	-11.95	-57.97	4.76	-53.21
3	18078.43	44.65 PK	74	-29.35	-55.37	4.76	-50.61
4	18075.56	34.29 AV	54	-19.71	-65.73	4.76	-60.97

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

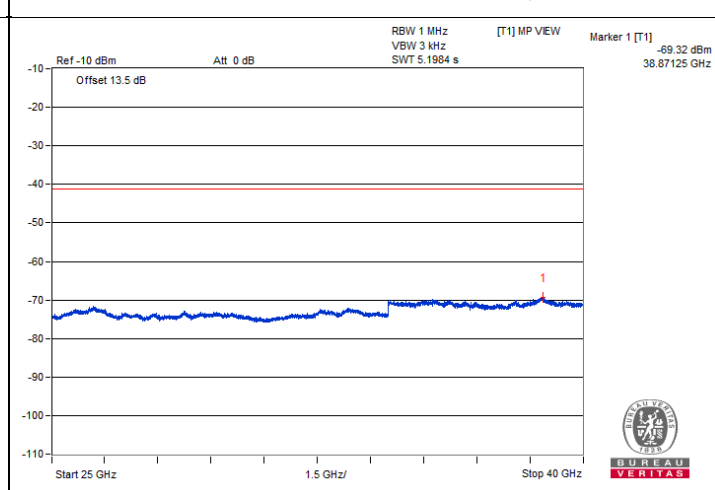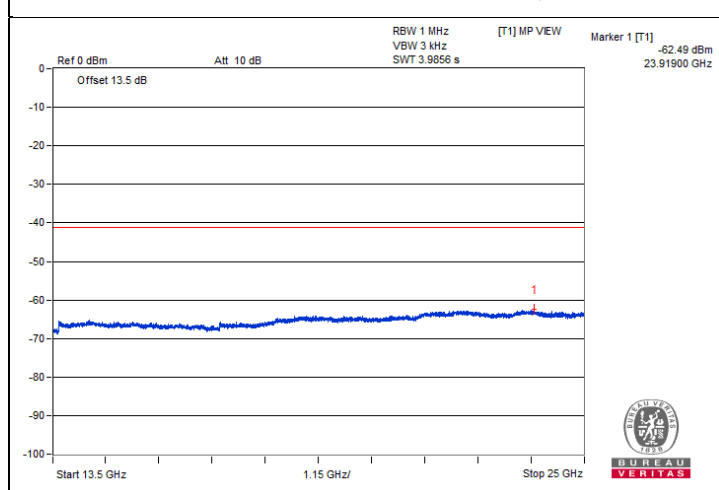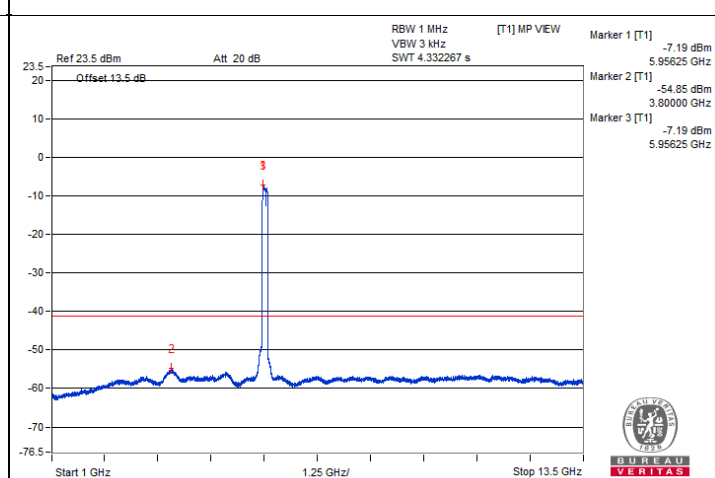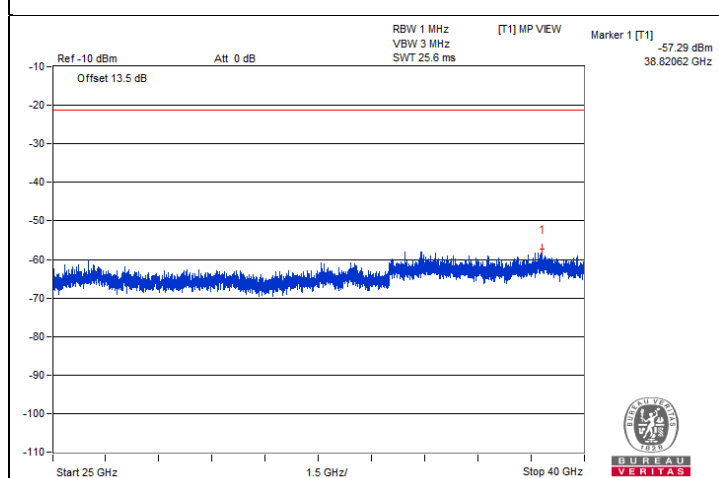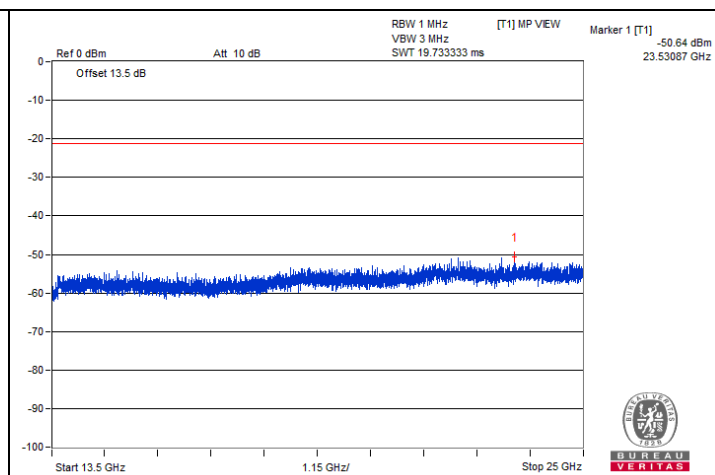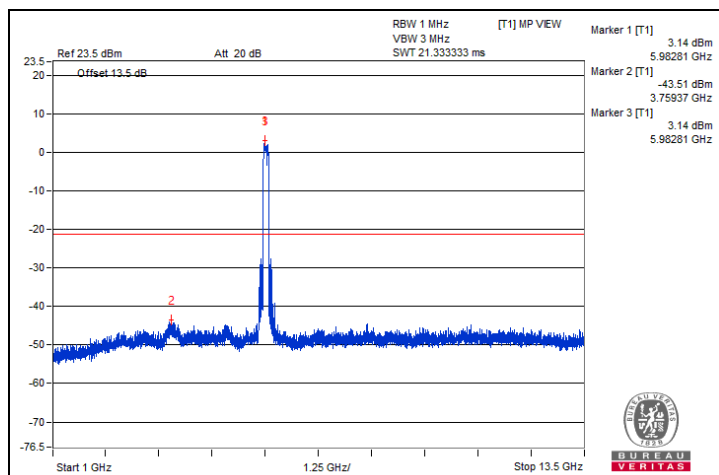


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.62	73.44 PK	88.2	-14.76	-26.58	4.76	-21.82
2	#5923.12	51.1 AV	68.2	-17.1	-48.92	4.76	-44.16

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

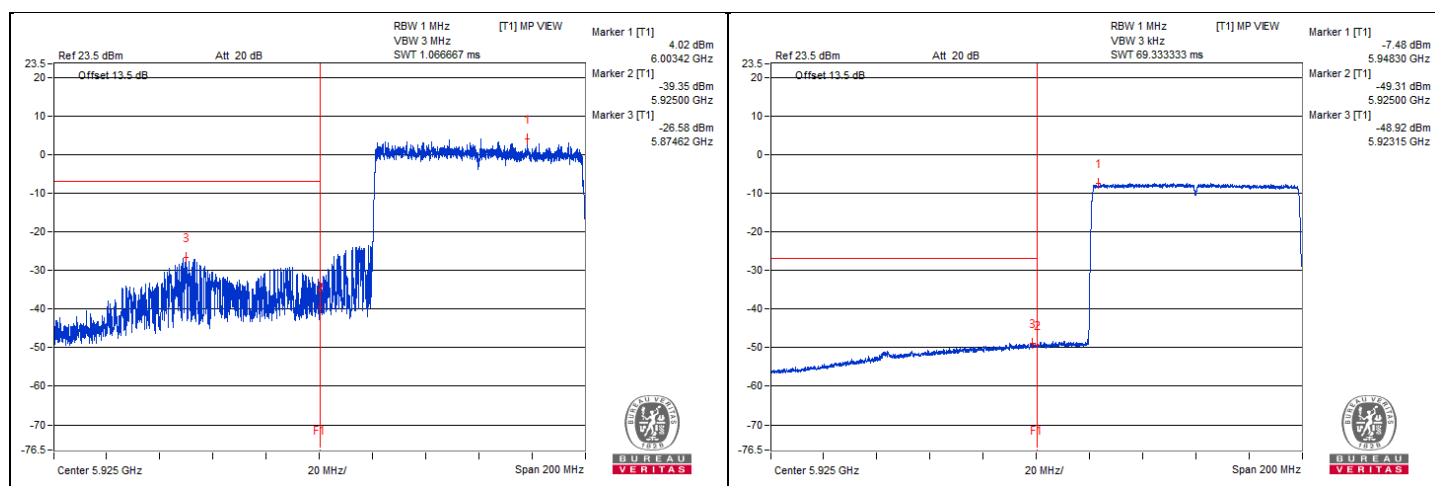







160 MHz Preamble 802.11be (RU996+484) - Channel 79

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12695.31	52.3 PK	74	-21.7	-47.72	4.76	-42.96
2	12685.93	42.45 AV	54	-11.55	-57.57	4.76	-52.81
3	19040.12	45.16 PK	74	-28.84	-54.86	4.76	-50.10
4	19028.62	35.24 AV	54	-18.76	-64.78	4.76	-60.02

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

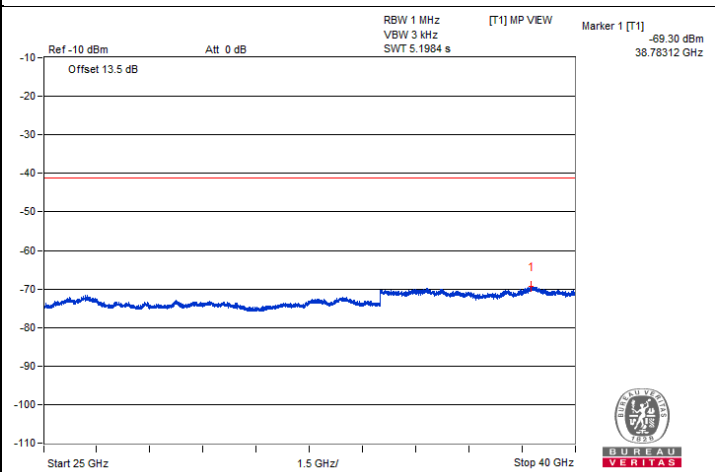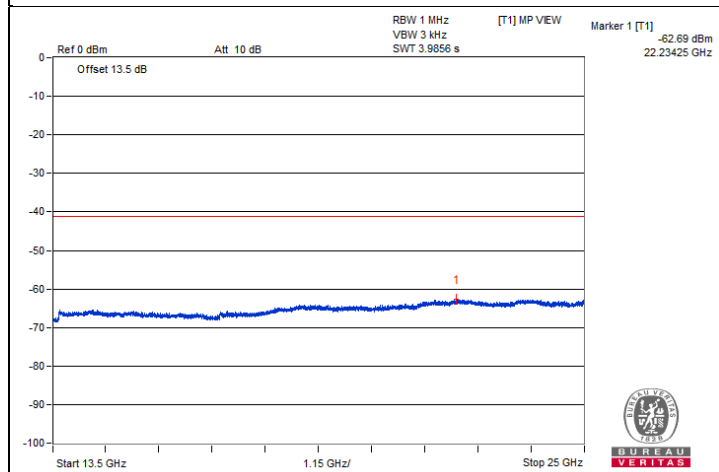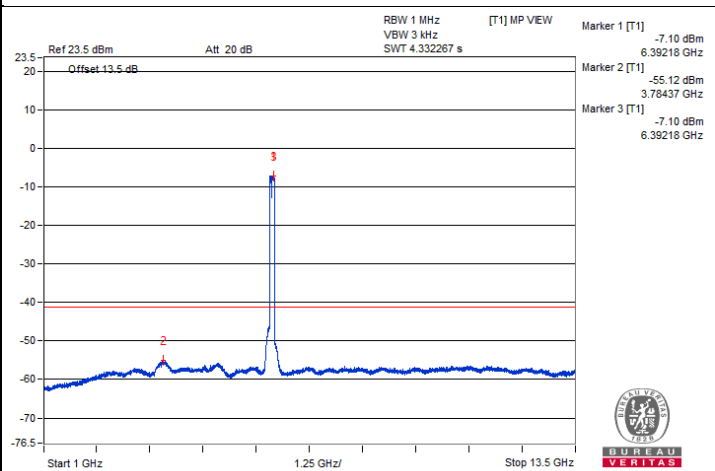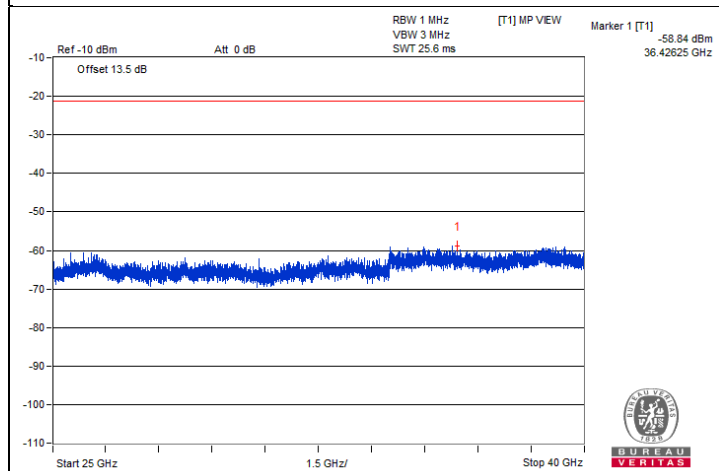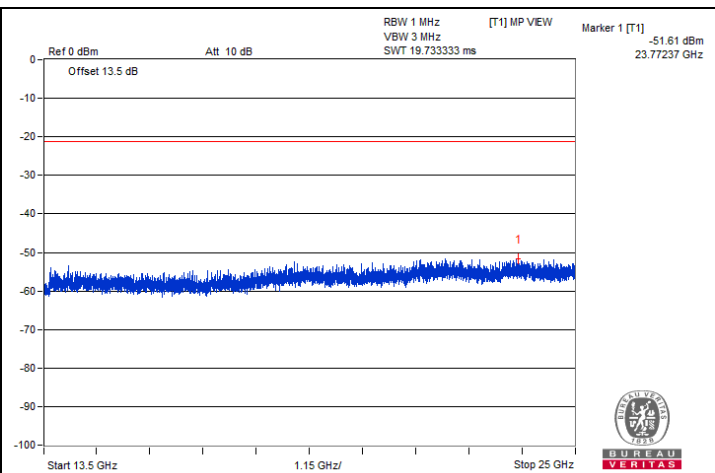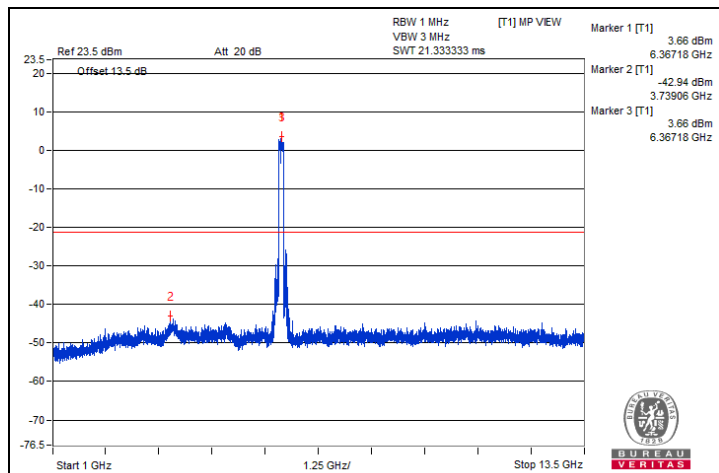







160 MHz Preamble 802.11be (RU996+484) - Channel 143

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13320.31	52.58 PK	74	-21.42	-47.44	4.76	-42.68
2	13332.81	42.16 AV	54	-11.84	-57.86	4.76	-53.10
3	19988.87	46.04 PK	74	-27.96	-53.98	4.76	-49.22
4	19997.5	35.14 AV	54	-18.86	-64.88	4.76	-60.12

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

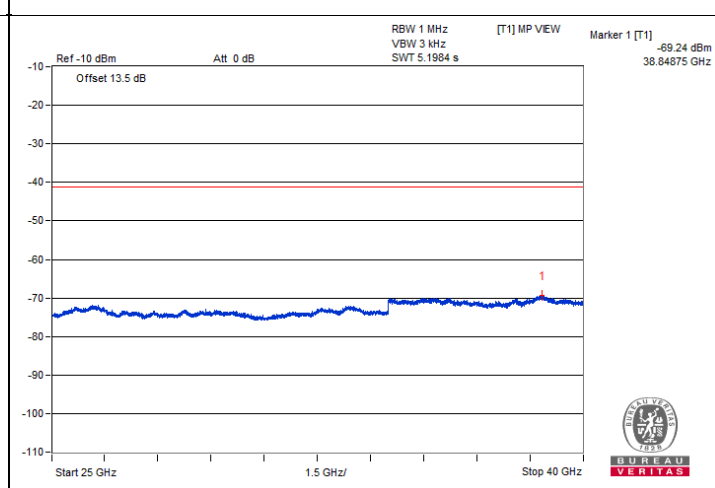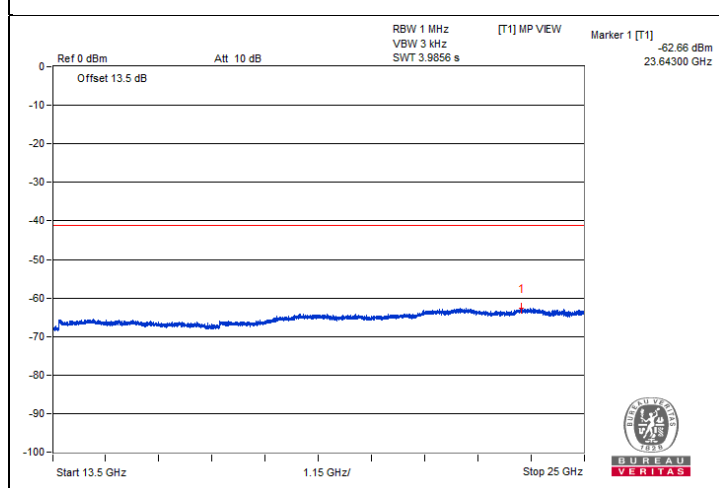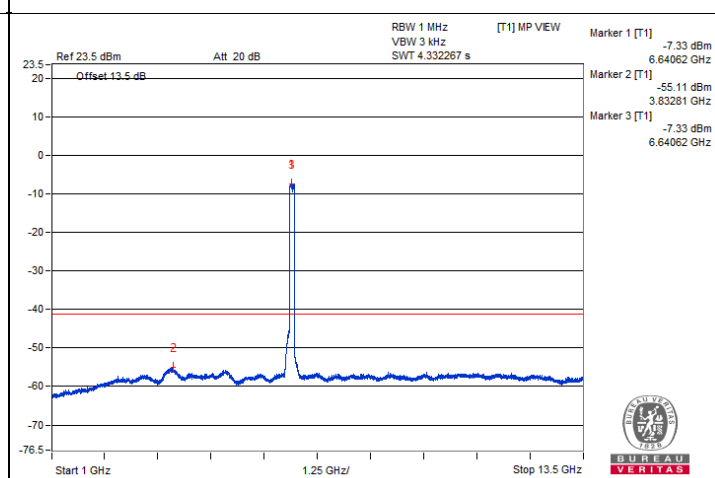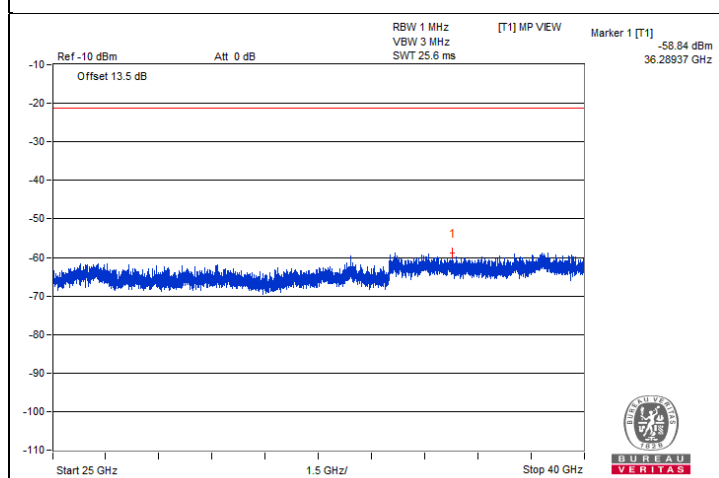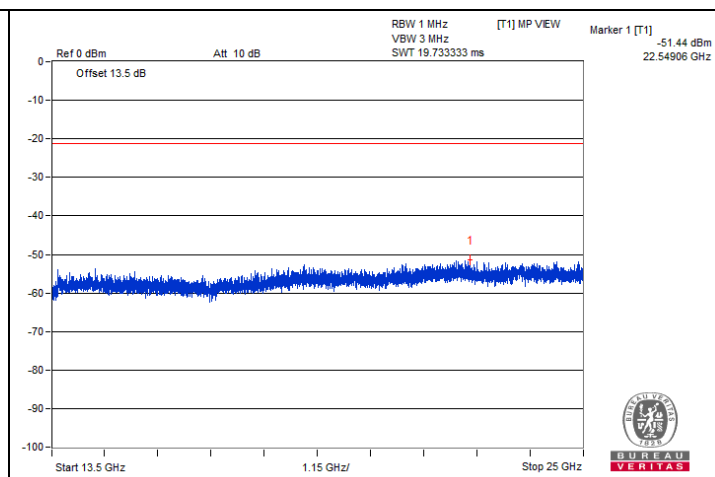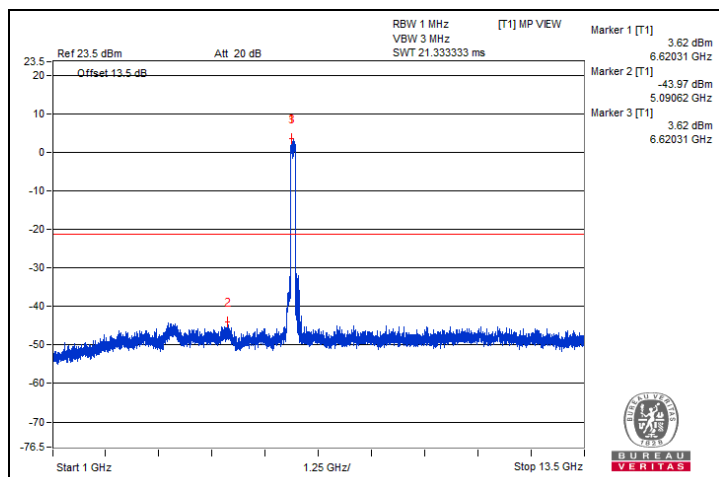







160 MHz Preamble 802.11be (RU996+484) - Channel 207

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13975.81	44.59 PK	88.2	-43.61	-55.43	4.76	-50.67
2	#13970.06	33.93 AV	68.2	-34.27	-66.09	4.76	-61.33
3	20963.5	44.38 PK	74	-29.62	-55.64	4.76	-50.88
4	20964.93	35.53 AV	54	-18.47	-64.49	4.76	-59.73

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

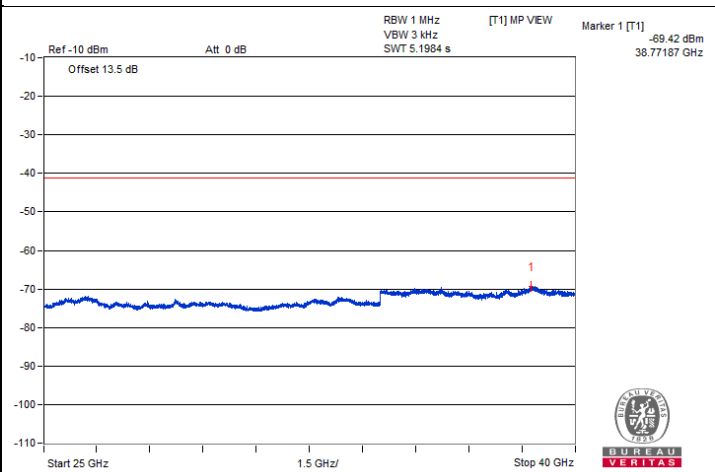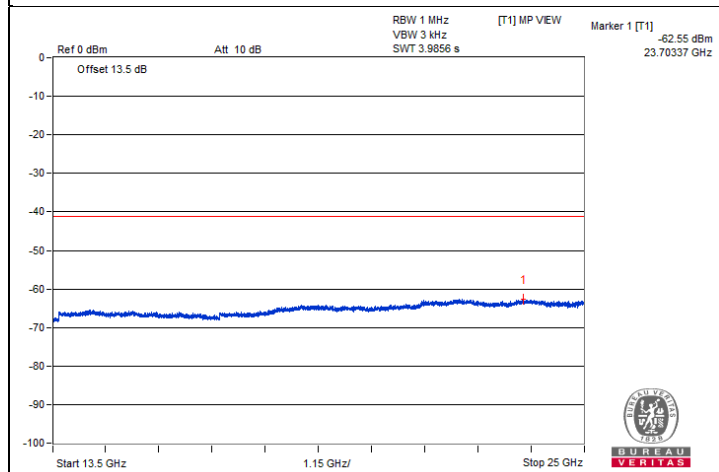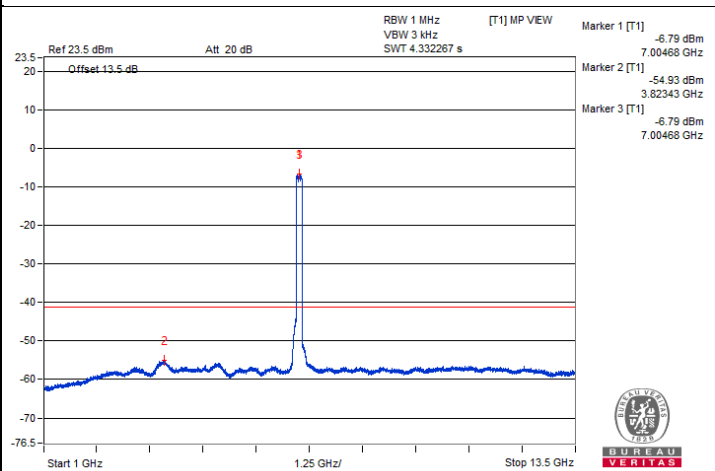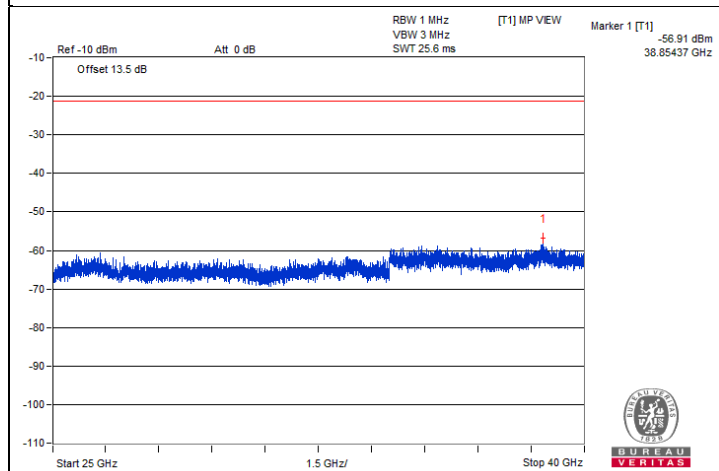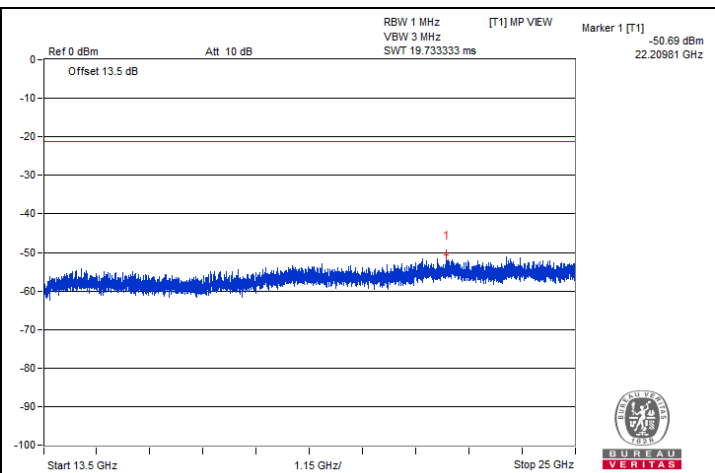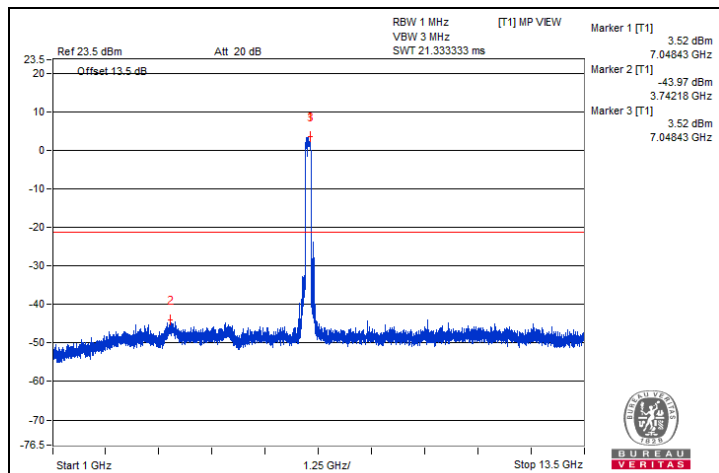


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125.82	73.9 PK	88.2	-14.3	-25.45	4.09	-21.36
2	#7127.2	48.19 AV	68.2	-20.01	-51.16	4.09	-47.07

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

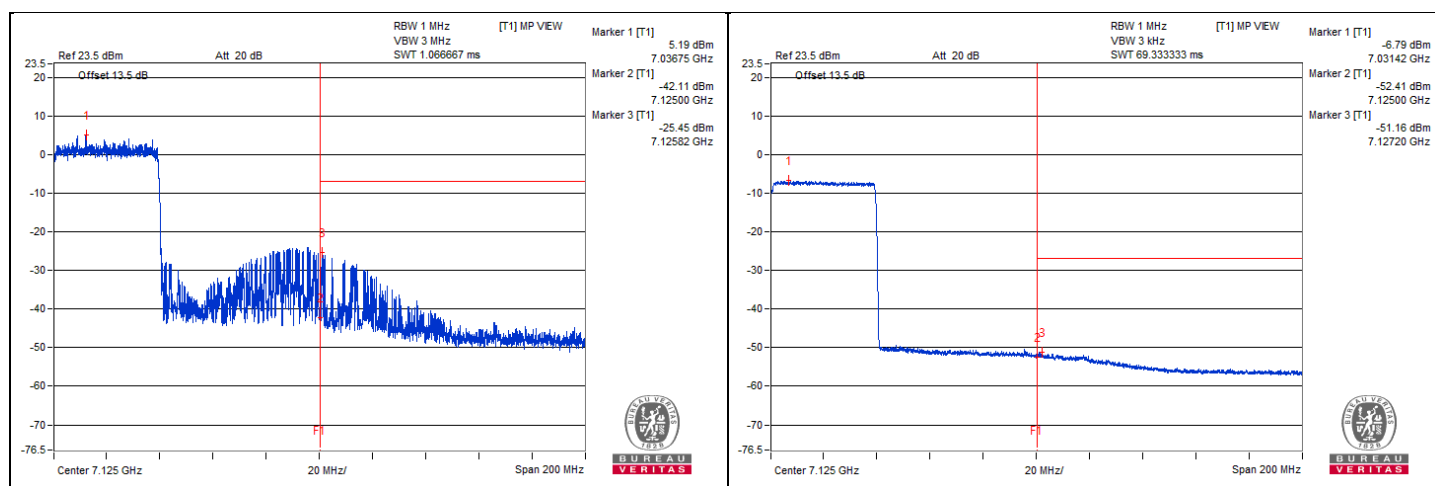


160 MHz Preamble 802.11be (RU996+484+242) - Channel 15

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12048.43	53.36 PK	74	-20.64	-46.66	4.76	-41.90
2	12040.62	42.51 AV	54	-11.49	-57.51	4.76	-52.75
3	18065.5	42.74 PK	74	-31.26	-57.28	4.76	-52.52
4	18068.37	34.28 AV	54	-19.72	-65.74	4.76	-60.98

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

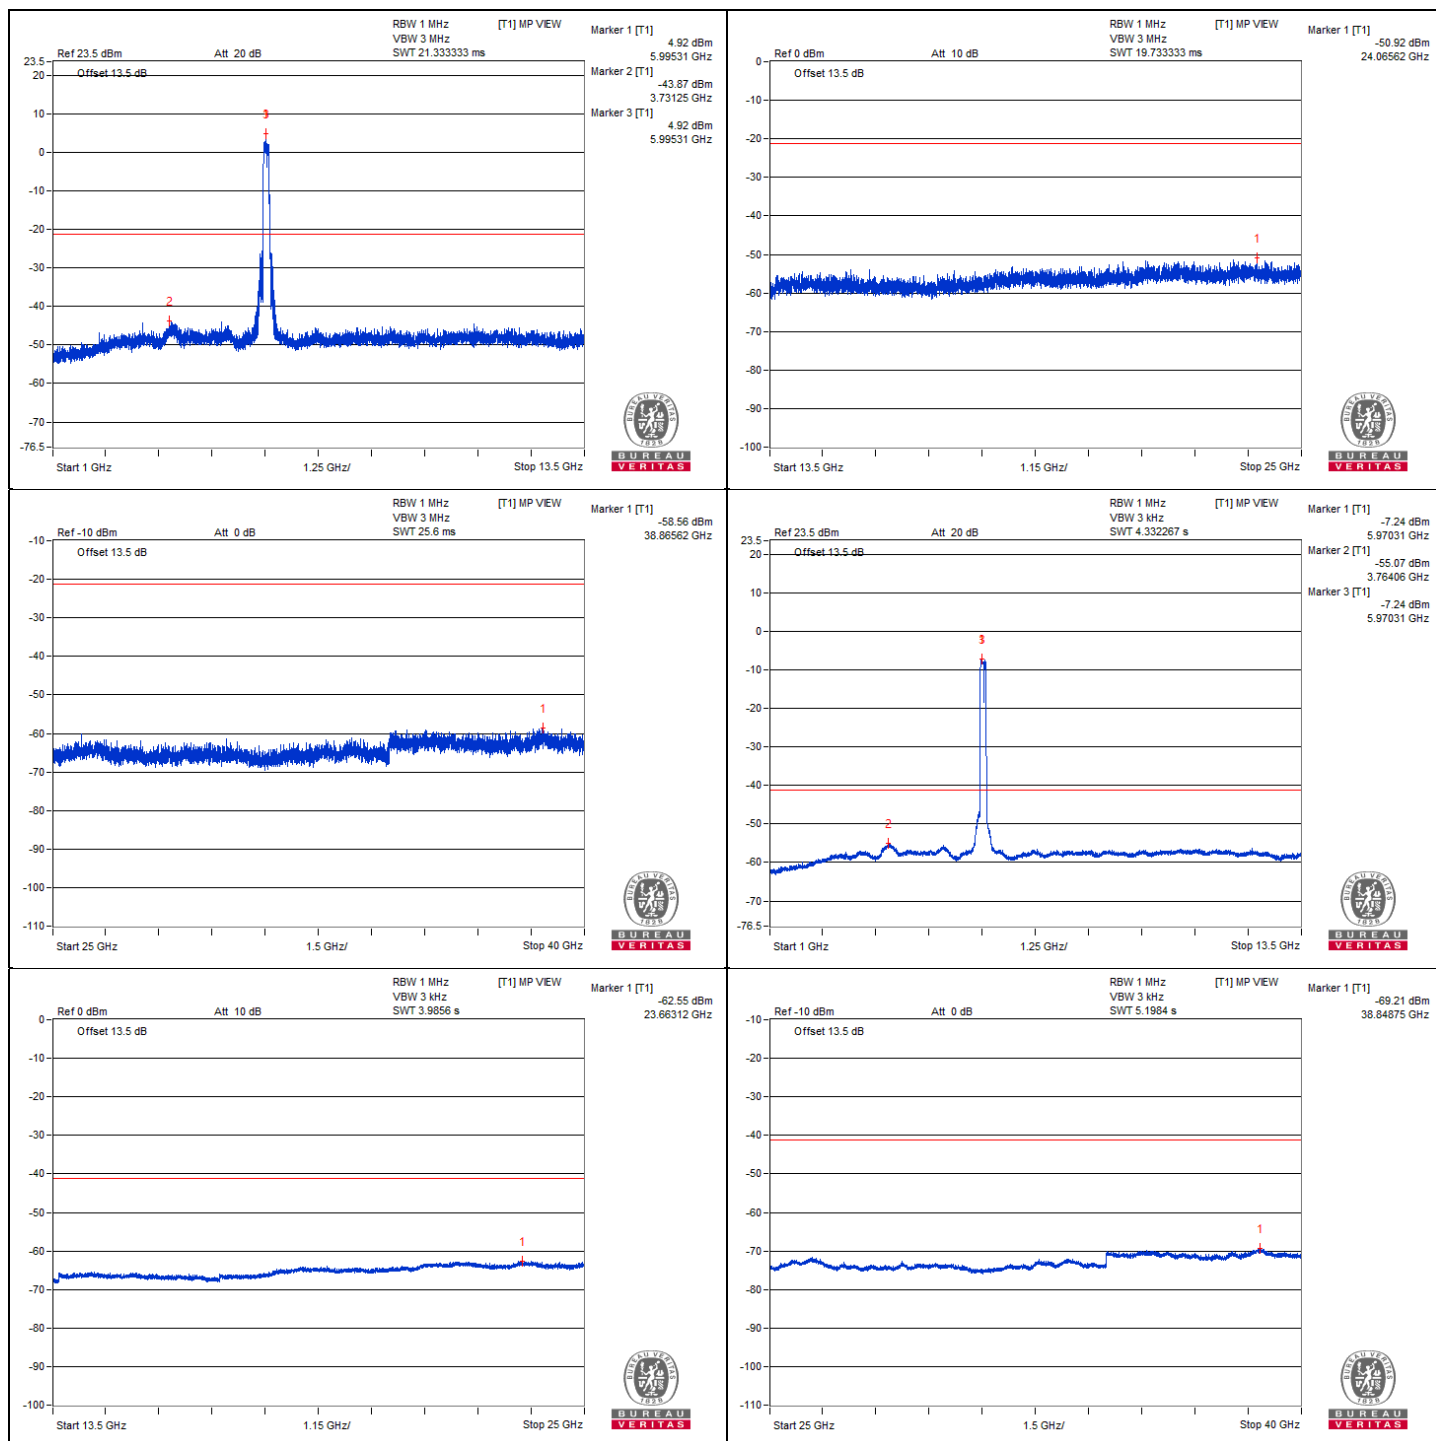


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5917.45	77.46 PK	88.2	-10.74	-22.56	4.76	-17.80
2	#5919.1	53.14 AV	68.2	-15.06	-46.88	4.76	-42.12

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

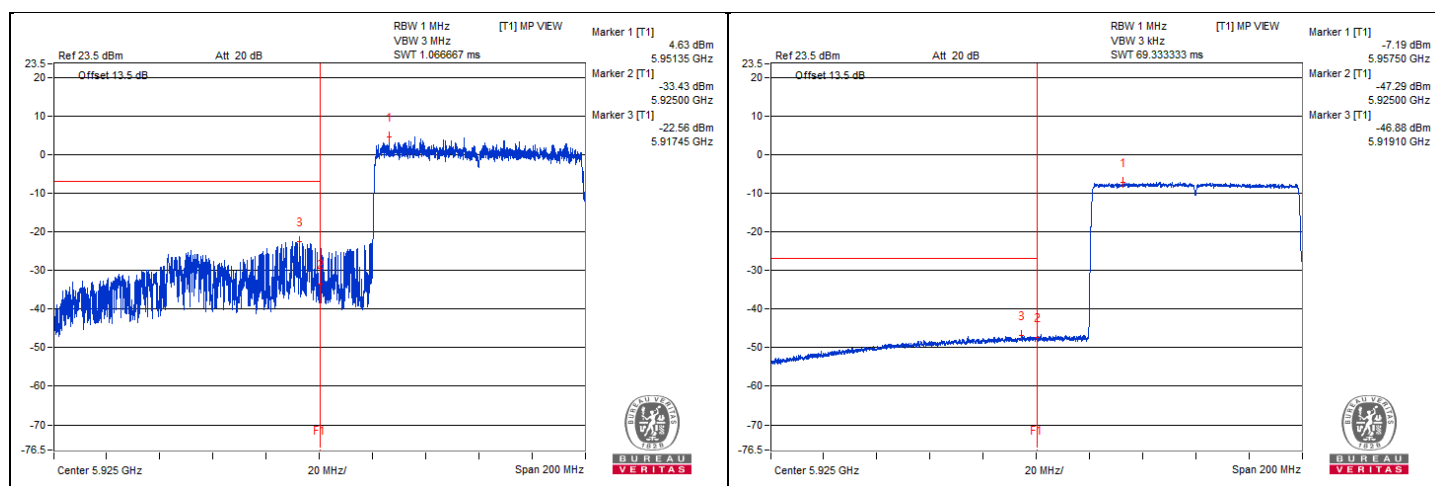


160 MHz Preamble 802.11be (RU996+484+242) - Channel 79

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12693.75	53.26 PK	74	-20.74	-46.76	4.76	-42.00
2	12693.75	43.35 AV	54	-10.65	-56.67	4.76	-51.91
3	19027.18	46.07 PK	74	-27.93	-53.95	4.76	-49.19
4	19035.81	35.91 AV	54	-18.09	-64.11	4.76	-59.35

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

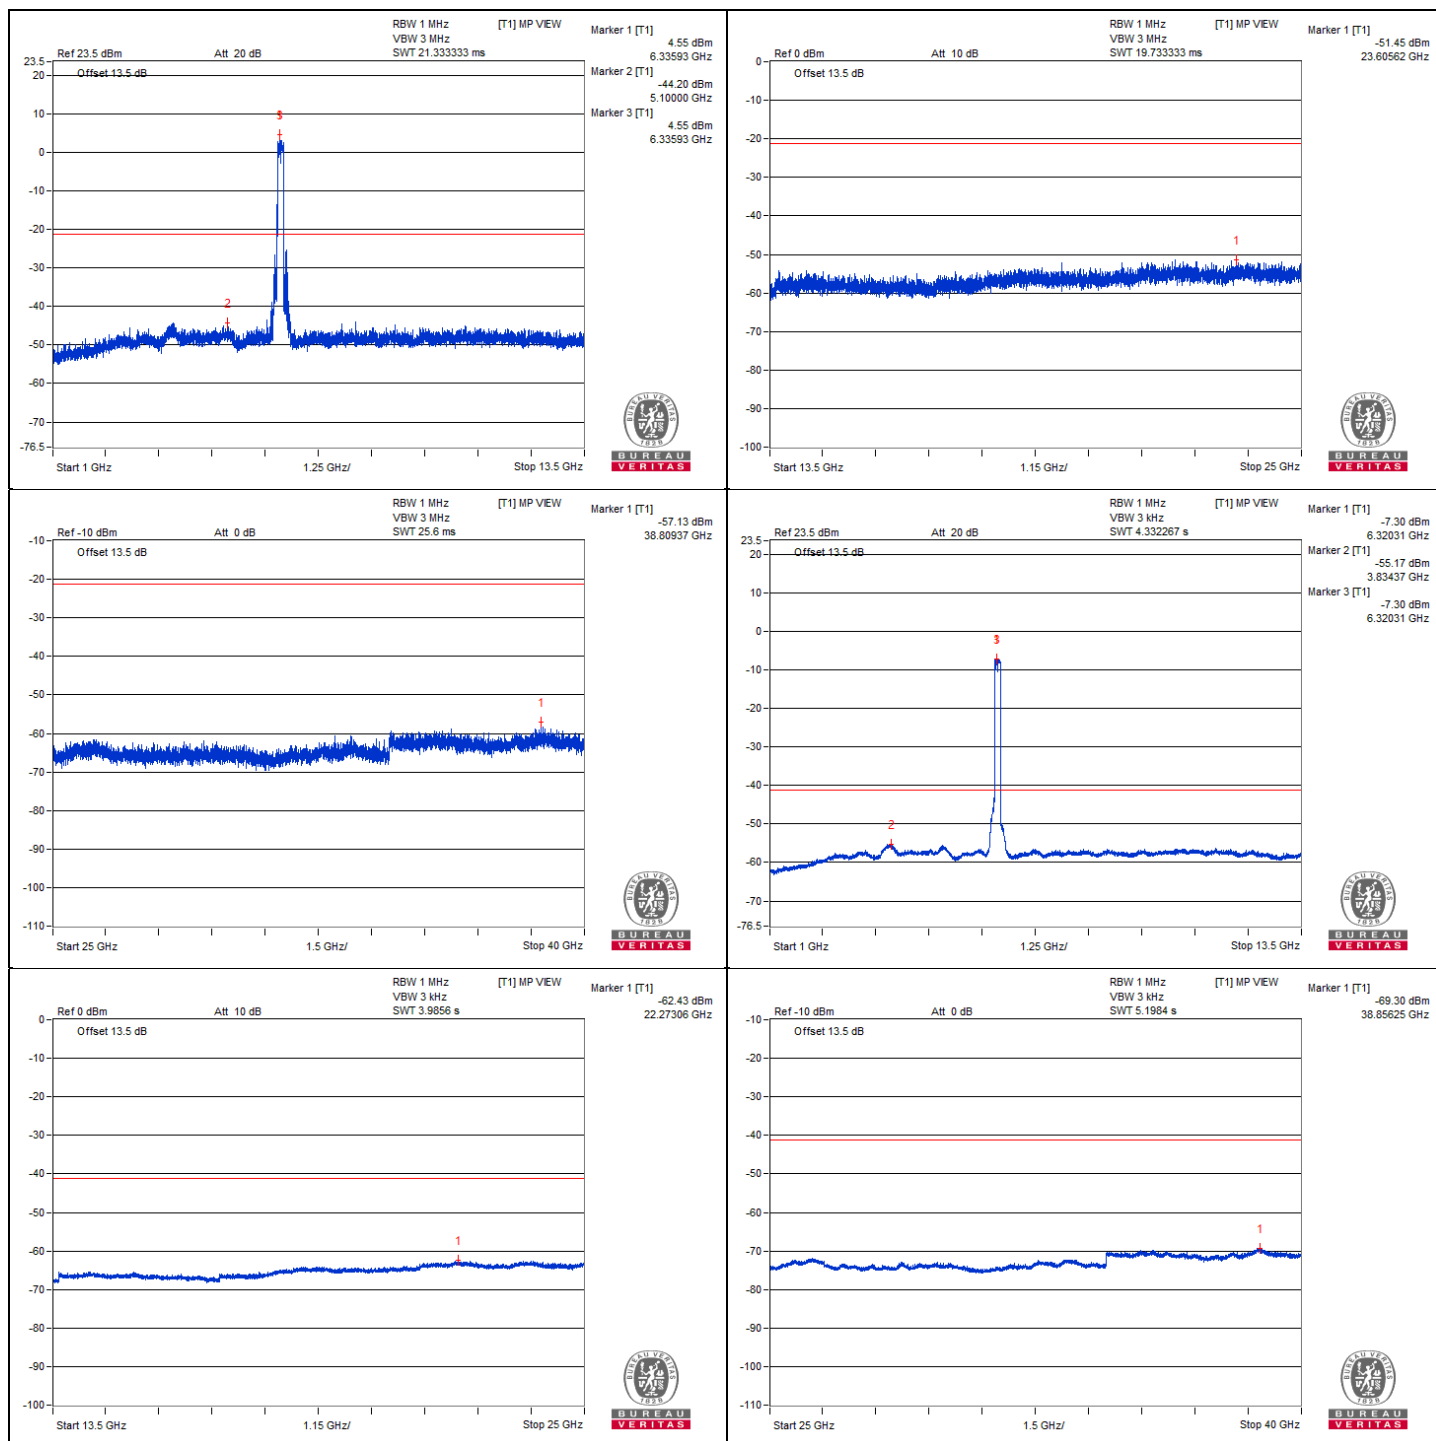







160 MHz Preamble 802.11be (RU996+484+242) - Channel 143

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13331.25	52.71 PK	74	-21.29	-47.31	4.76	-42.55
2	13328.12	42.9 AV	54	-11.1	-57.12	4.76	-52.36
3	20003.25	46.34 PK	74	-27.66	-53.68	4.76	-48.92
4	19993.18	36.09 AV	54	-17.91	-63.93	4.76	-59.17

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

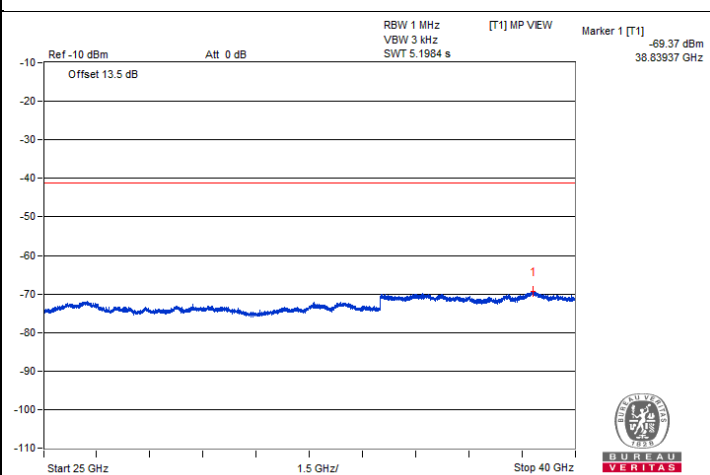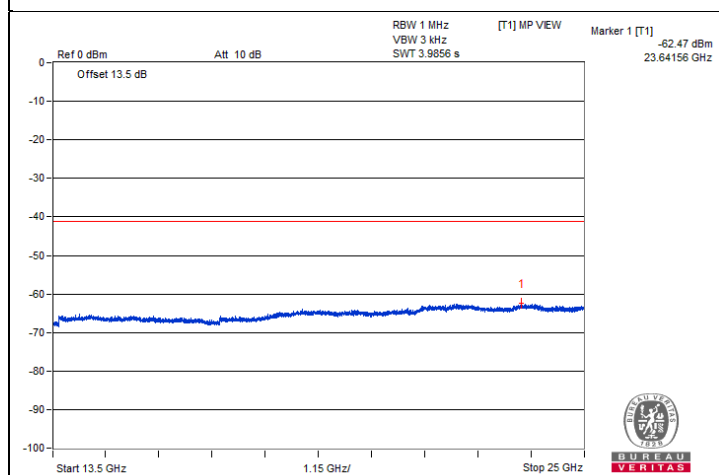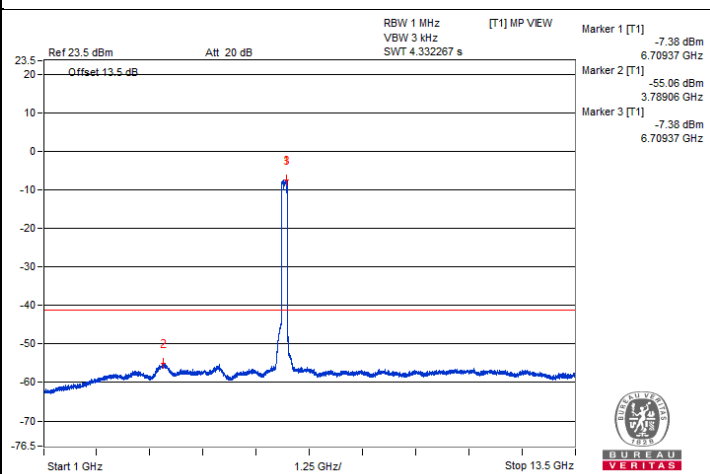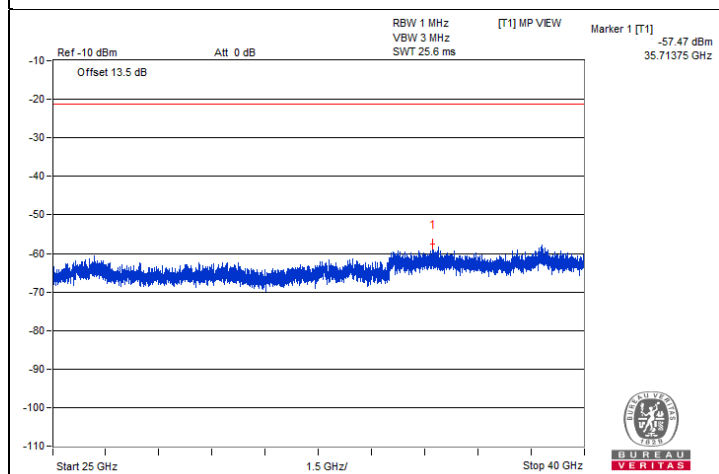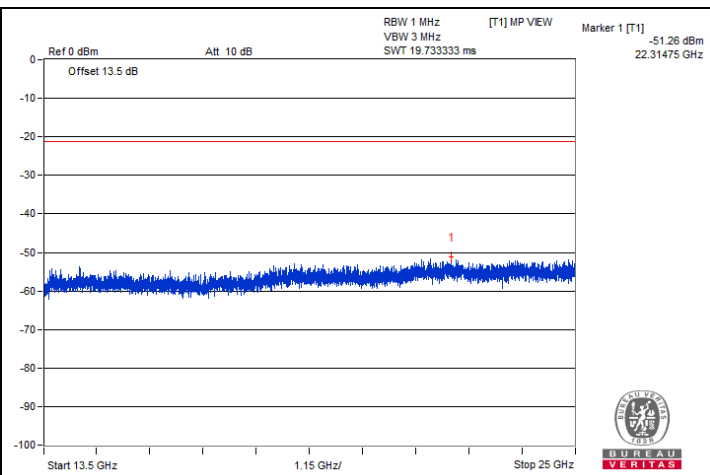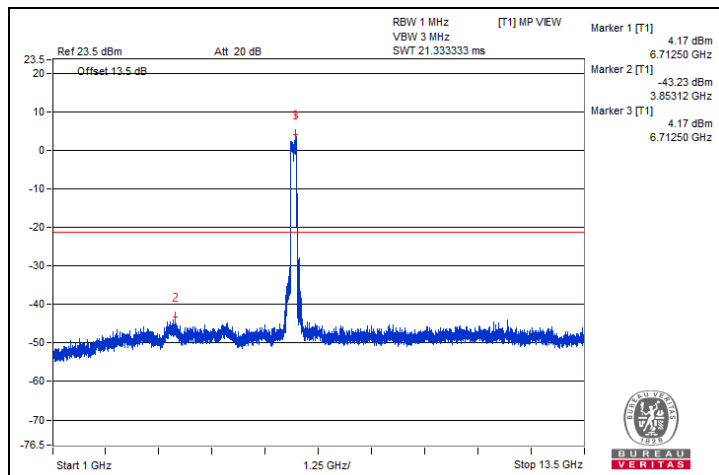







160 MHz Preamble 802.11be (RU996+484+242) - Channel 207

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13978.68	43.46 PK	88.2	-44.74	-56.56	4.76	-51.80
2	#13960	34.38 AV	68.2	-33.82	-65.64	4.76	-60.88
3	20953.43	46.53 PK	74	-27.47	-53.49	4.76	-48.73
4	20952	36.43 AV	54	-17.57	-63.59	4.76	-58.83

Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

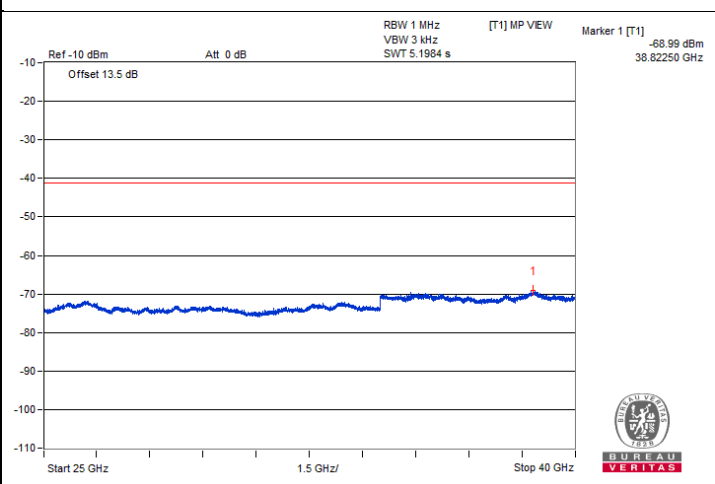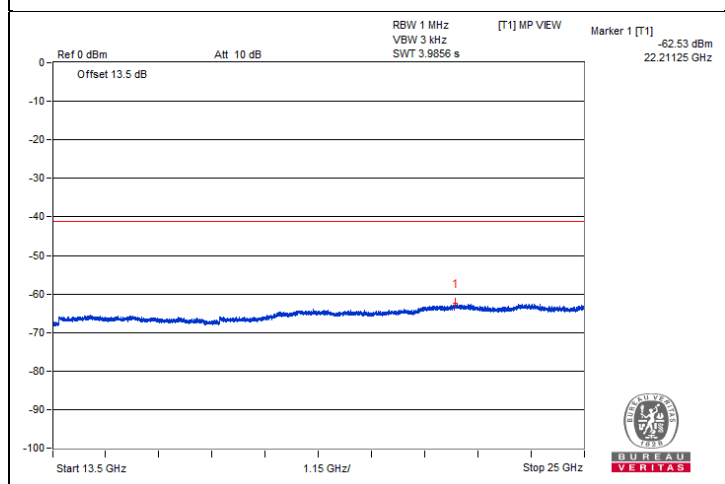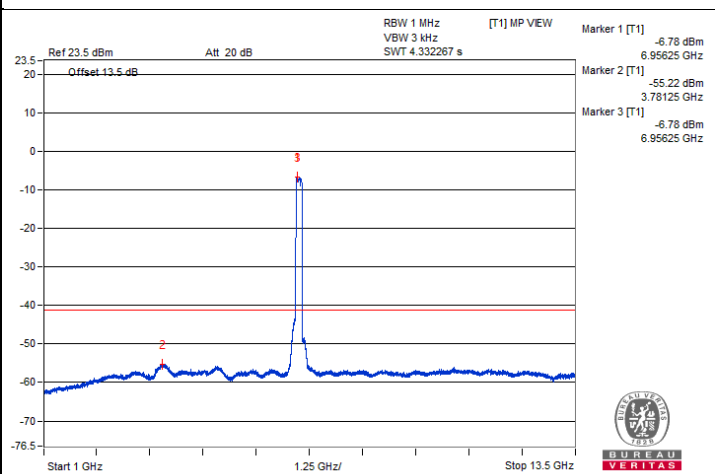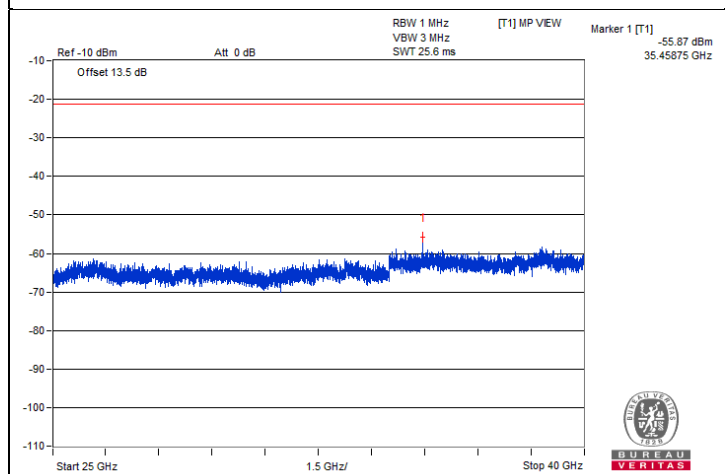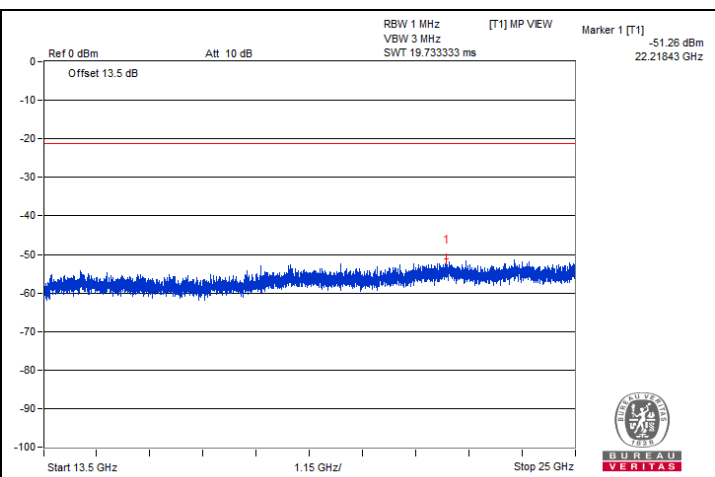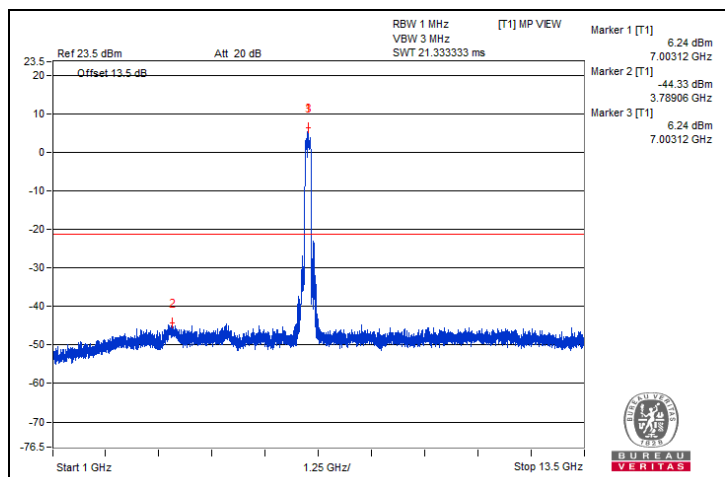


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7132.02	76.3 PK	88.2	-11.9	-23.05	4.09	-18.96
2	#7125.95	51.12 AV	68.2	-17.08	-48.23	4.09	-44.14

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

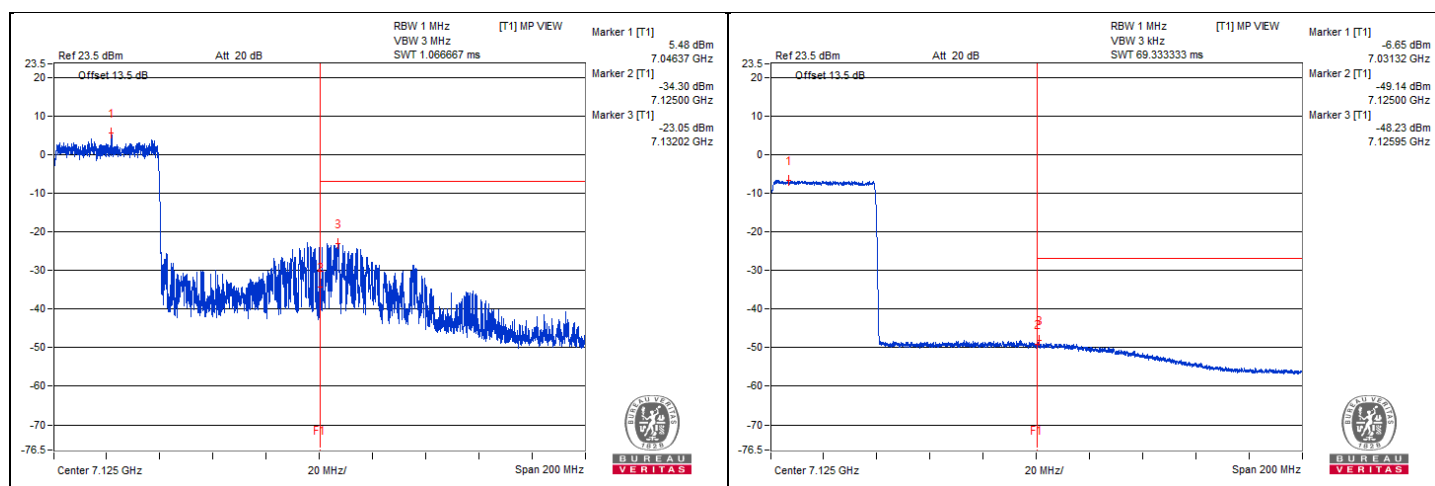







320 MHz Preamble 802.11be (RU996*2+484) - Channel 31

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12201.56	52.53 PK	74	-21.47	-47.49	4.76	-42.73
2	12201.56	42.43 AV	54	-11.57	-57.59	4.76	-52.83
3	18314.18	44.45 PK	74	-29.55	-55.57	4.76	-50.81
4	18309.87	34.68 AV	54	-19.32	-65.34	4.76	-60.58

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

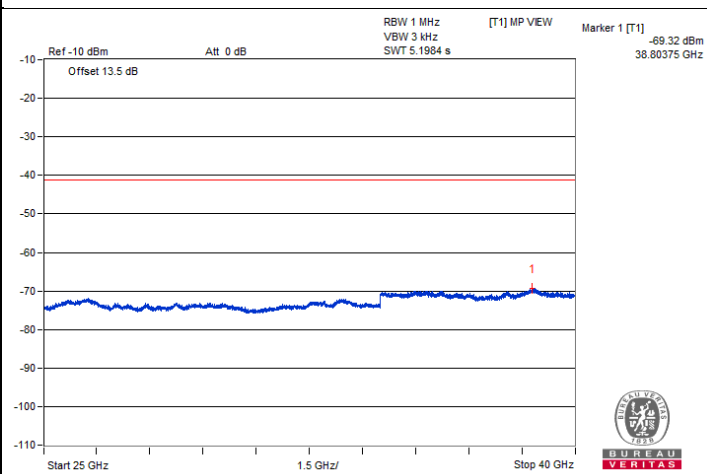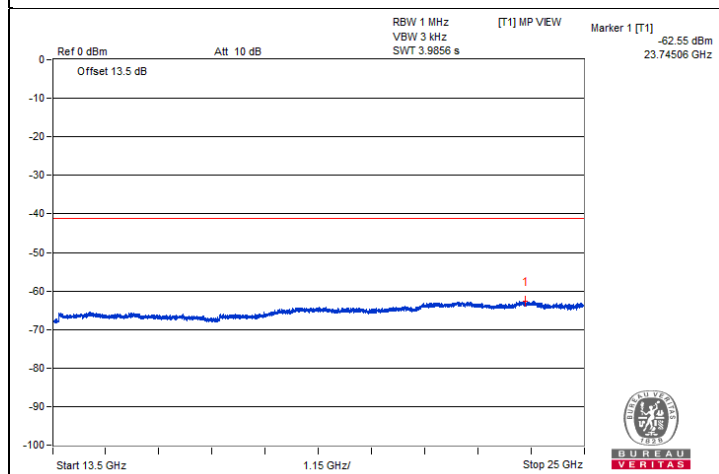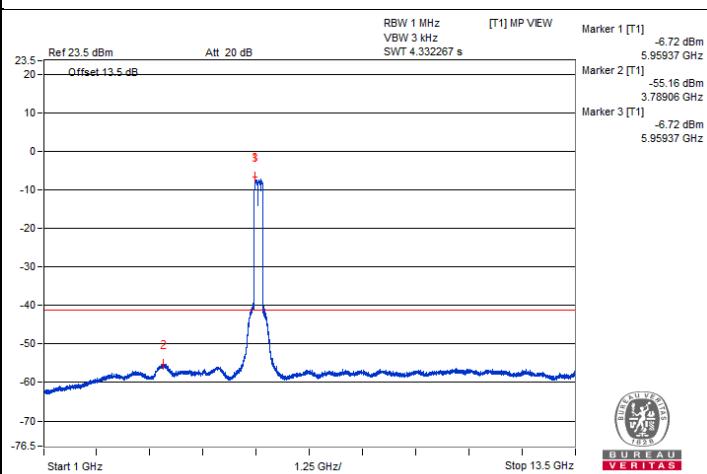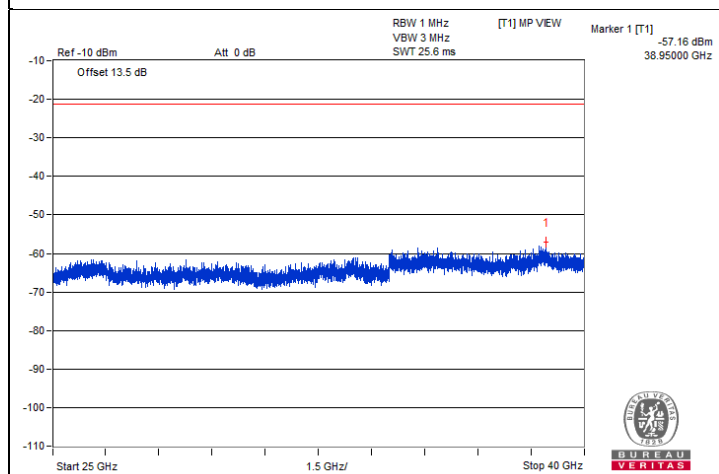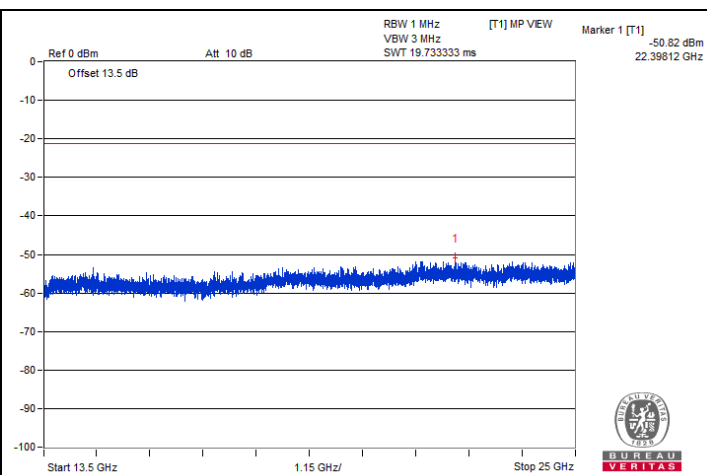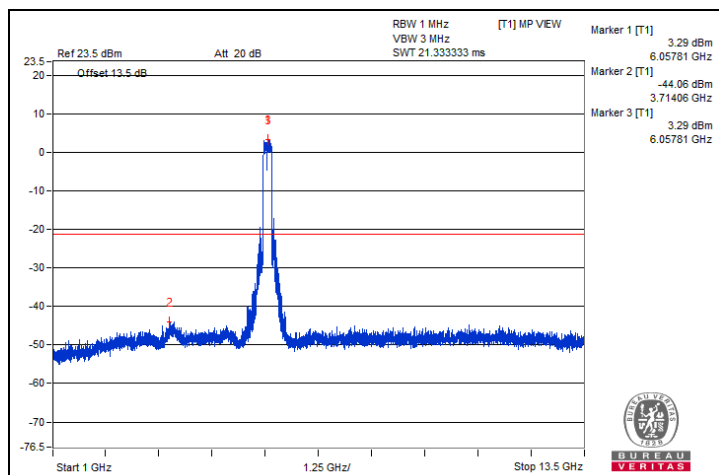


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.47	81.27 PK	88.2	-6.93	-18.75	4.76	-13.99
2	#5923.15	60.89 AV	68.2	-7.31	-39.13	4.76	-34.37

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

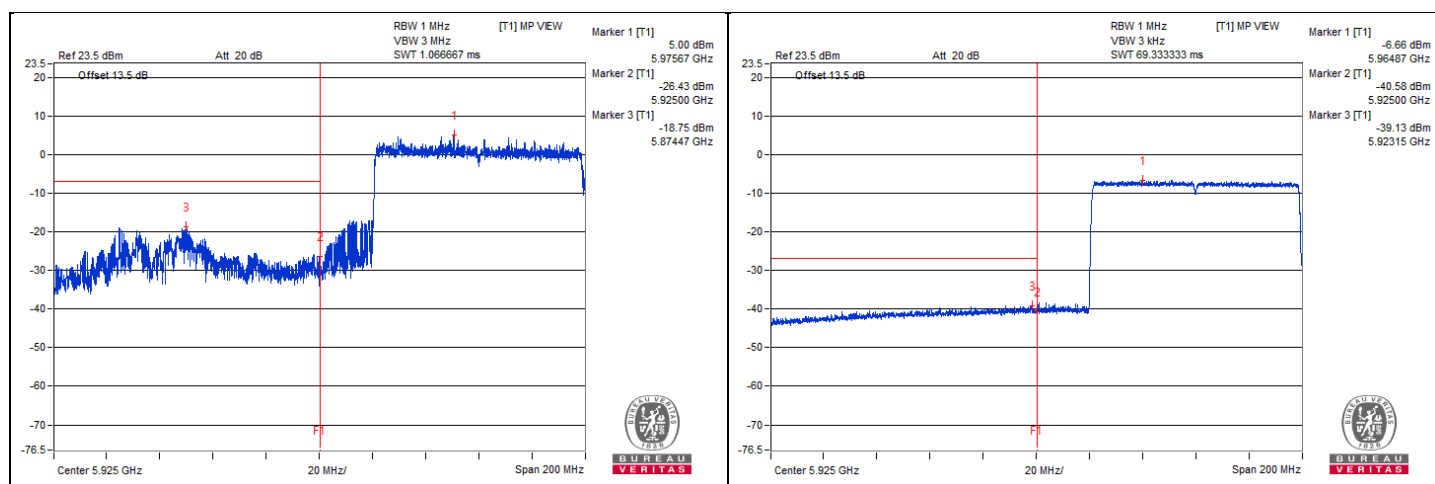


320 MHz Preamble 802.11be (RU996*2+484) - Channel 63

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12532.81	52.22 PK	74	-21.78	-47.8	4.76	-43.04
2	12539.06	42.52 AV	54	-11.48	-57.5	4.76	-52.74
3	18795.75	45.26 PK	74	-28.74	-54.76	4.76	-50.00
4	18797.18	35.12 AV	54	-18.88	-64.9	4.76	-60.14

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

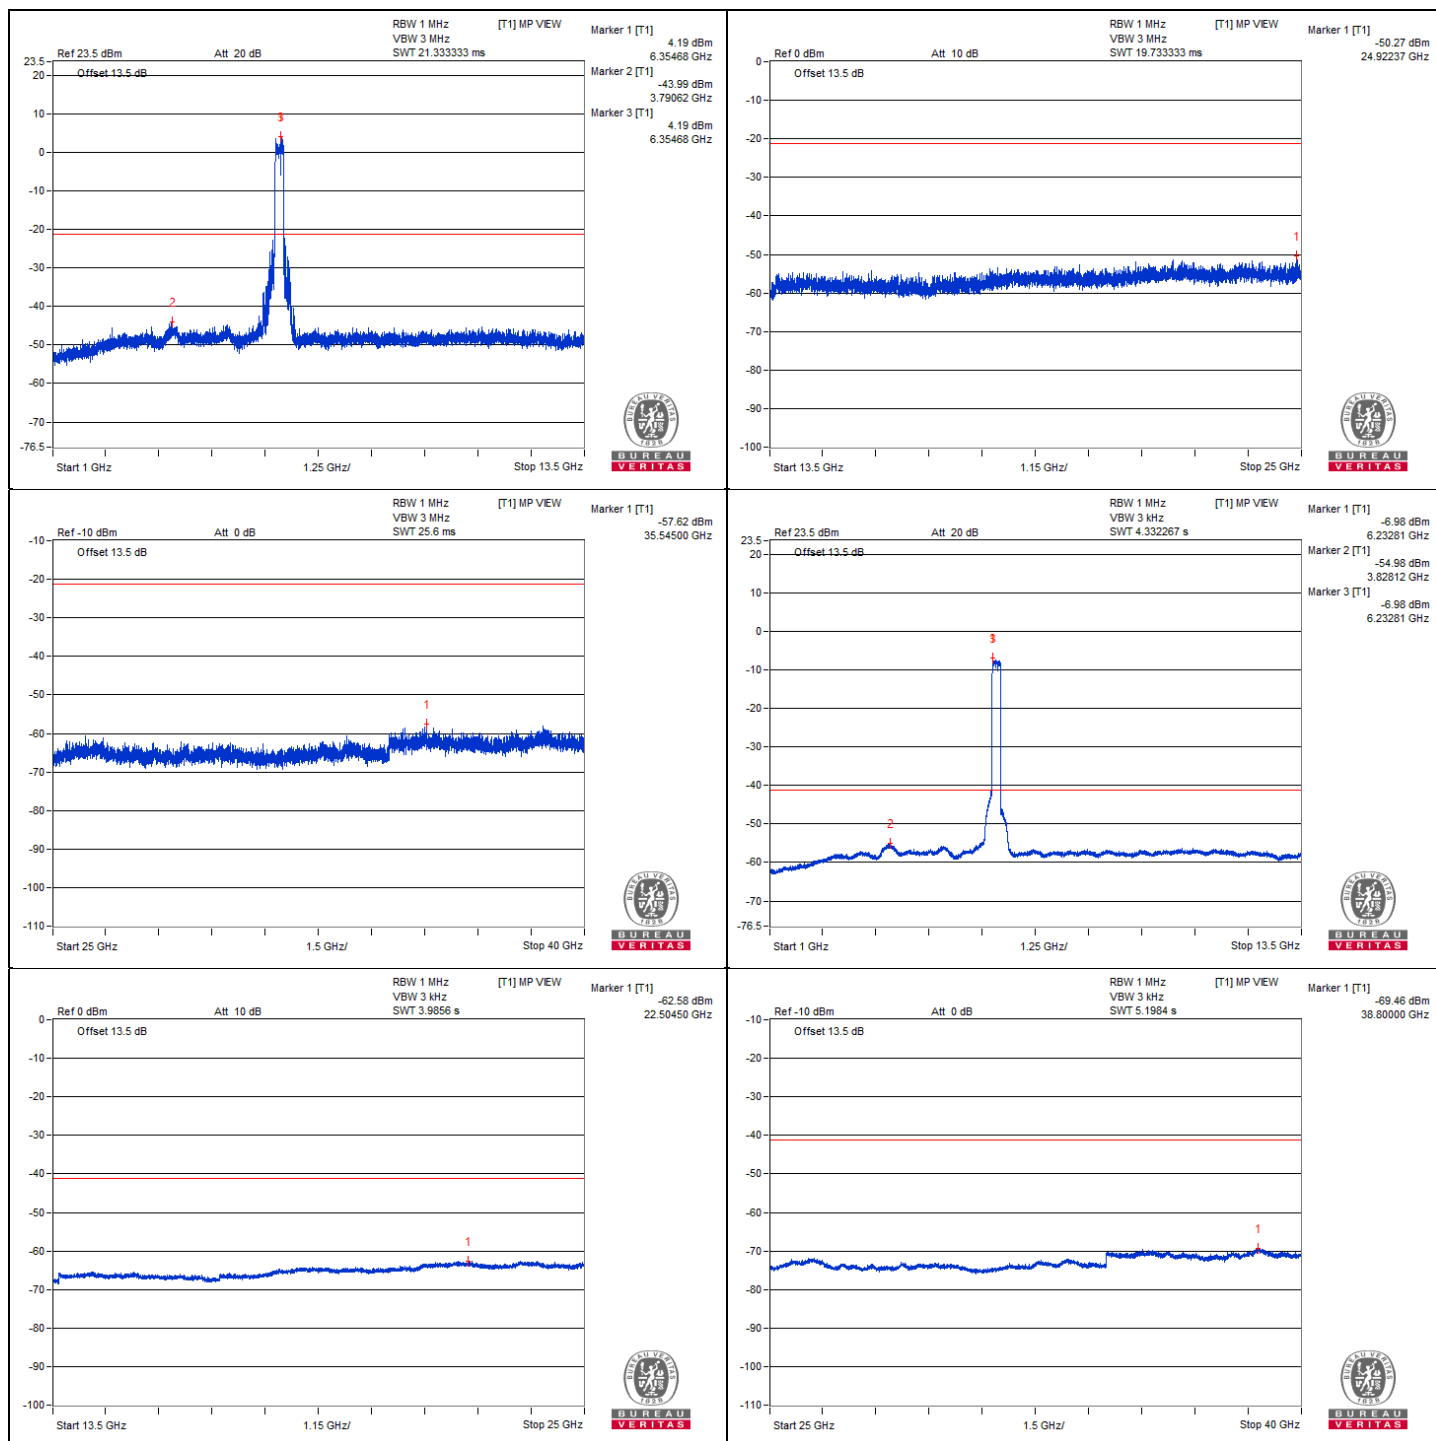







320 MHz Preamble 802.11be (RU996*2+484) - Channel 127

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13162.5	53.07 PK	88.2	-35.13	-46.95	4.76	-42.19
2	#13176.56	42.2 AV	68.2	-26	-57.82	4.76	-53.06
3	19756	45.88 PK	74	-28.12	-54.14	4.76	-49.38
4	19763.18	35.47 AV	54	-18.53	-64.55	4.76	-59.79

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

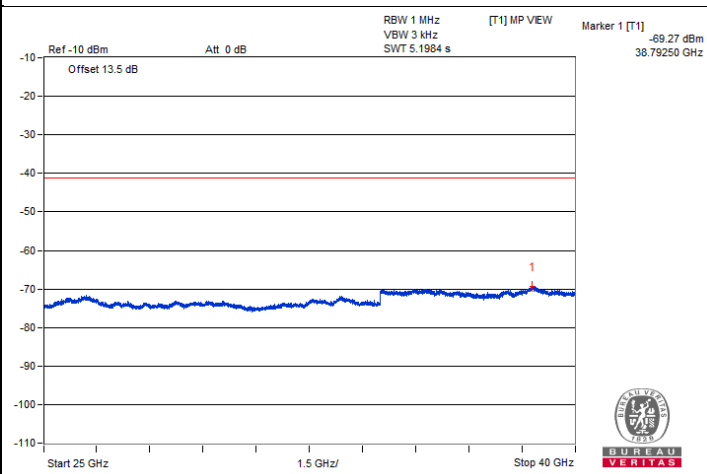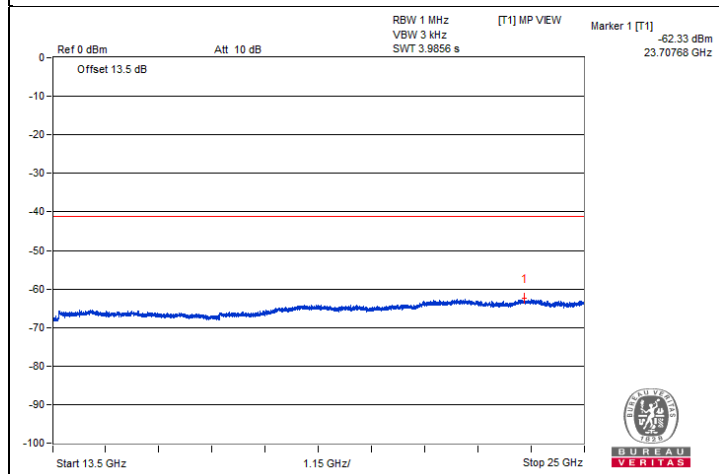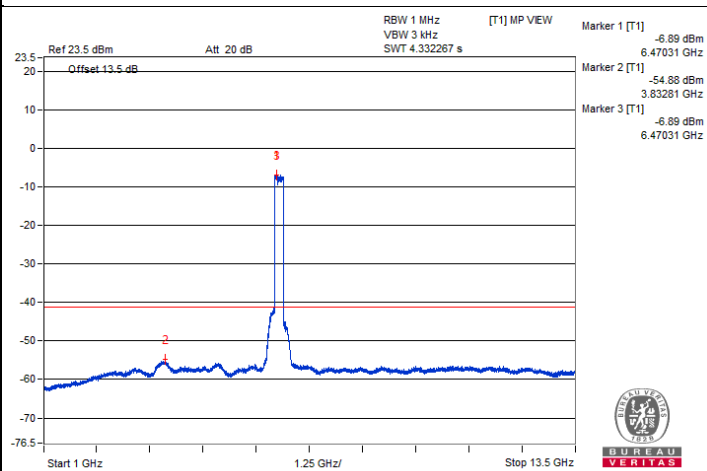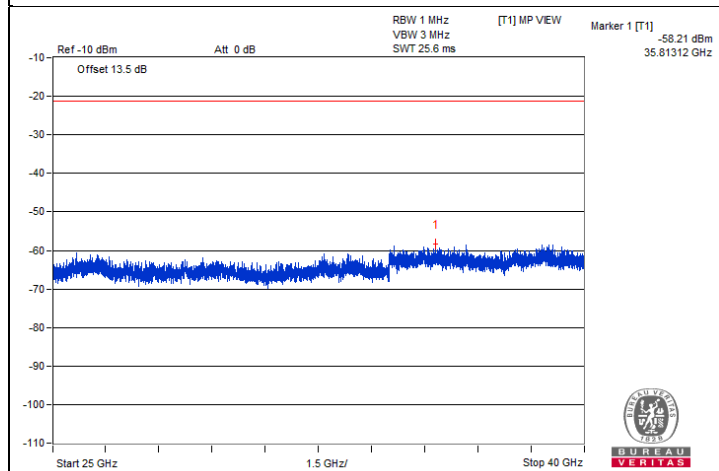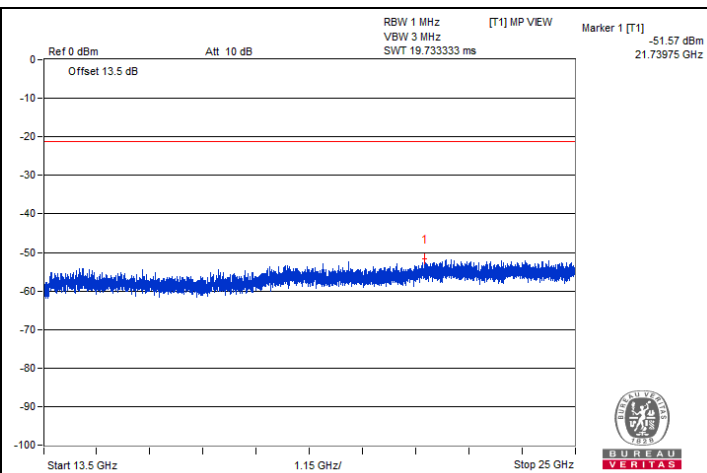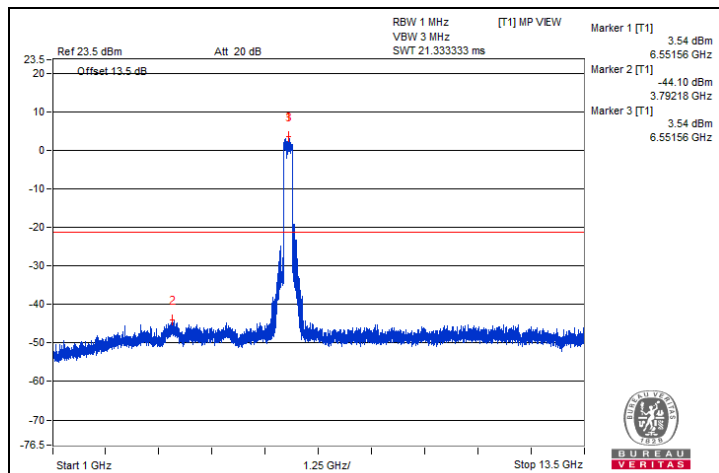


320 MHz Preamble 802.11be (RU996*2+484) - Channel 191

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13817.68	43.46 PK	88.2	-44.74	-56.56	4.76	-51.80
2	#13817.68	33.6 AV	68.2	-34.6	-66.42	4.76	-61.66
3	20724.87	46.8 PK	74	-27.2	-53.22	4.76	-48.46
4	20707.62	35.32 AV	54	-18.68	-64.7	4.76	-59.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

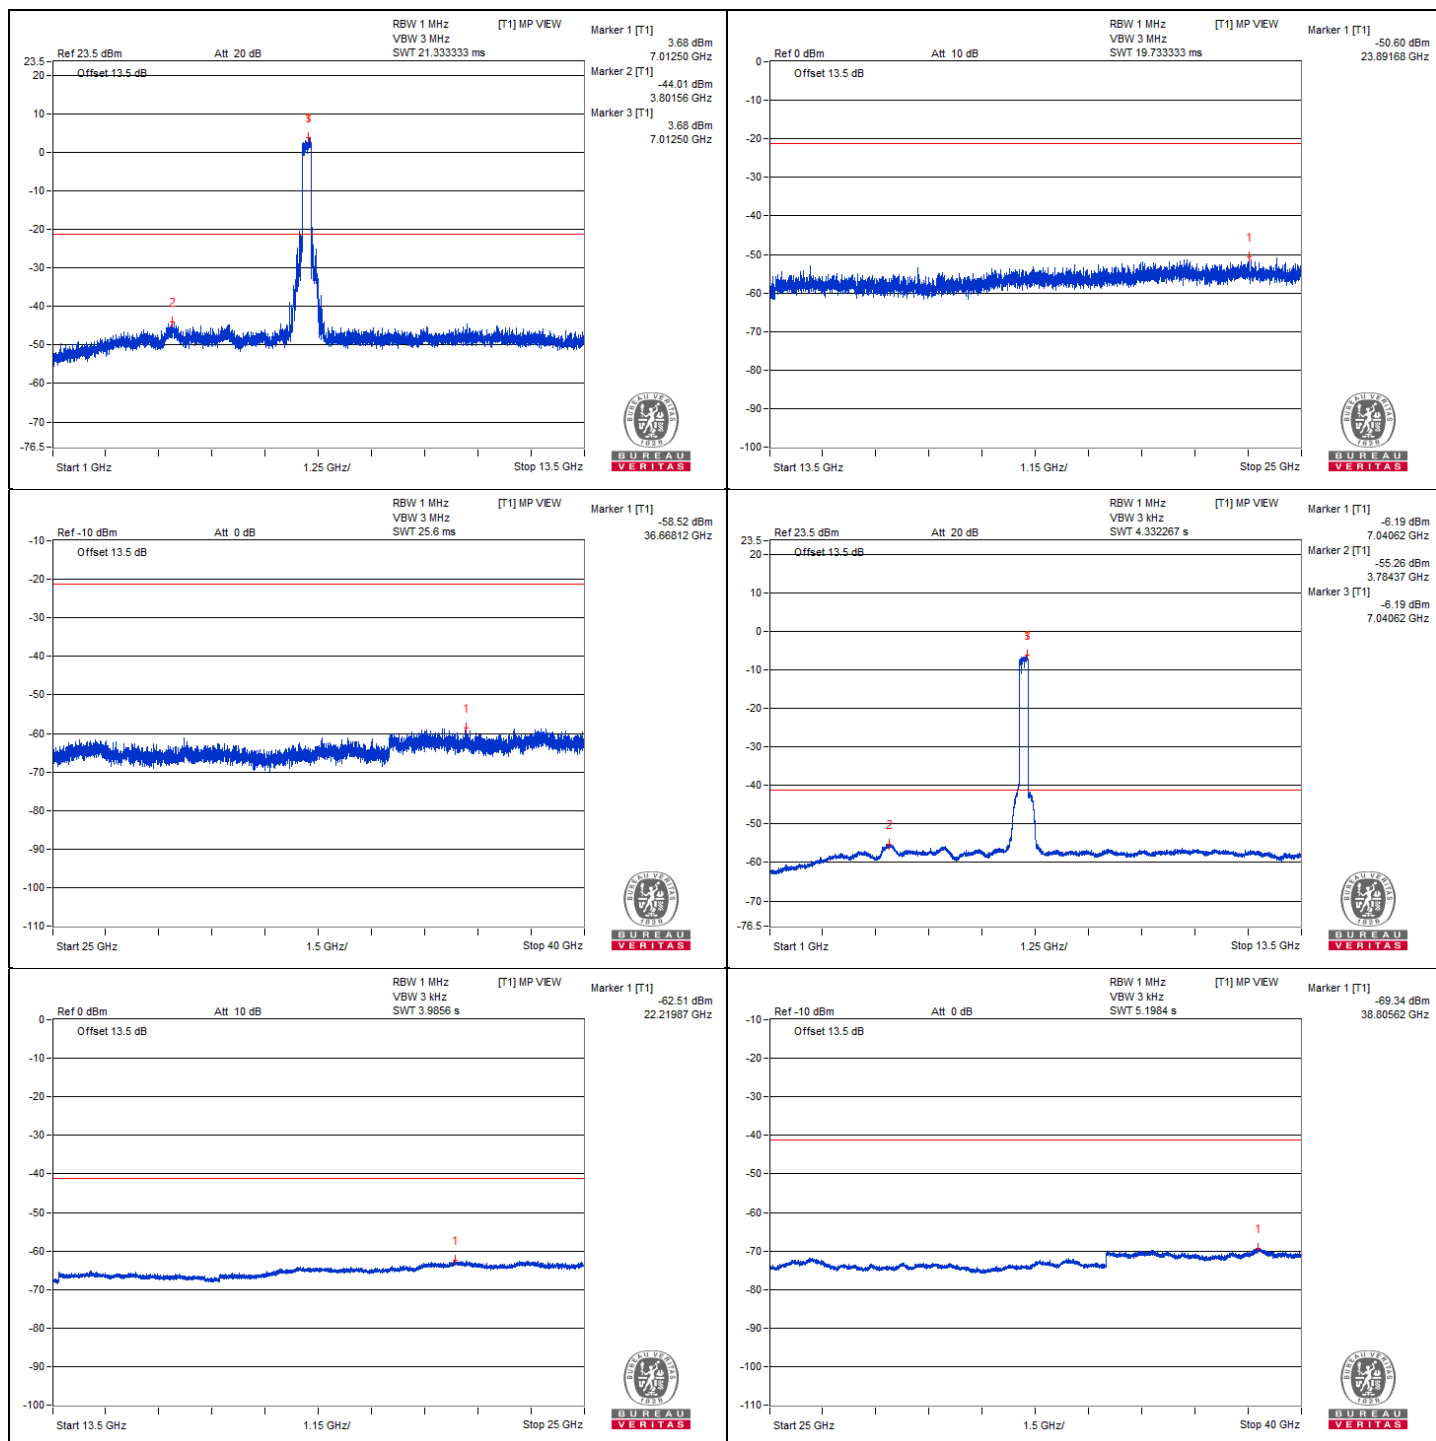


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7148.92	75.55 PK	88.2	-12.65	-23.8	4.09	-19.71
2	#7131.4	58.69 AV	68.2	-9.51	-40.66	4.09	-36.57

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

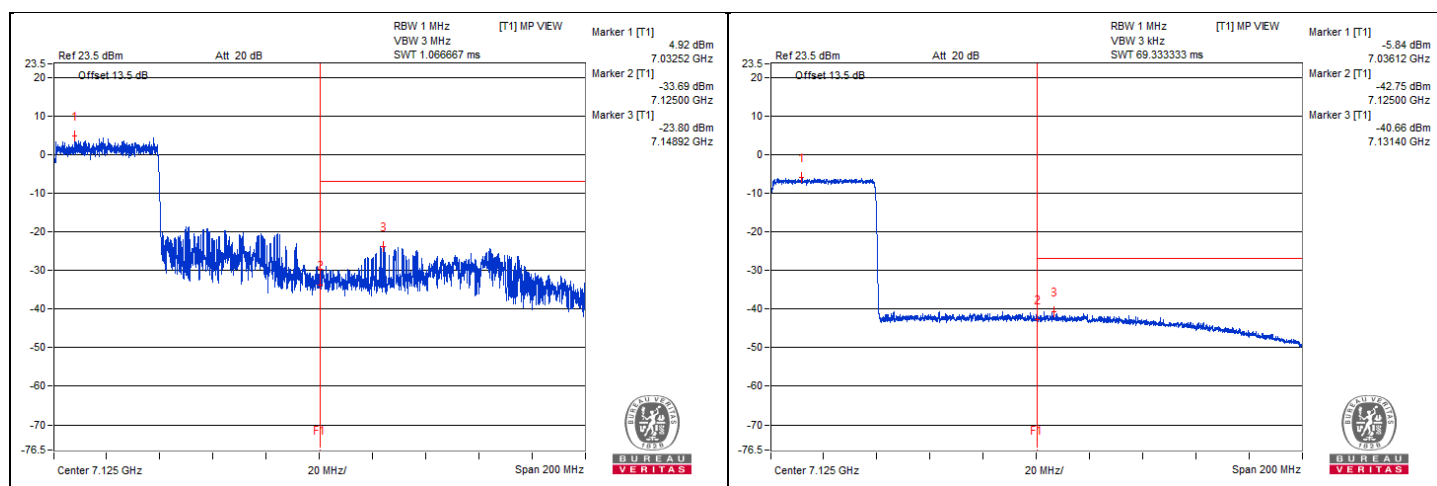

320 MHz Preamble 802.11be (RU996*3) - Channel 31

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12201.56	52.38 PK	74	-21.62	-47.64	4.76	-42.88
2	12206.25	42.53 AV	54	-11.47	-57.49	4.76	-52.73
3	18318.5	44.89 PK	74	-29.11	-55.13	4.76	-50.37
4	18318.5	34.63 AV	54	-19.37	-65.39	4.76	-60.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.