


Plots of EUT Tx waveform




802.11be (EHT20) / CH105

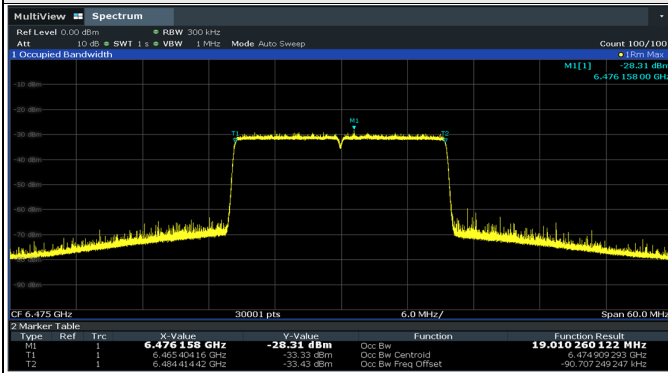


802.11be (EHT160) / CH111


Plots of Injected signal (AWGN) level

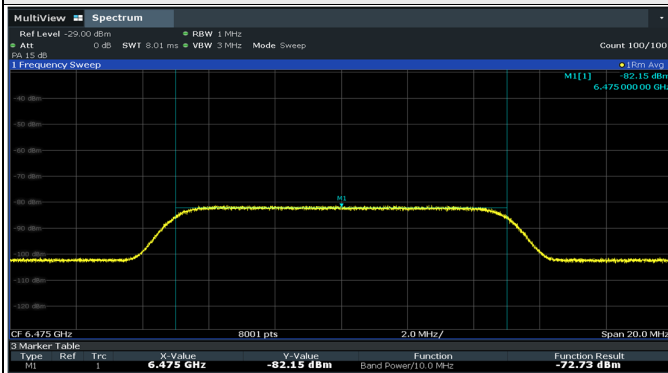


802.11be (EHT20) / CH105

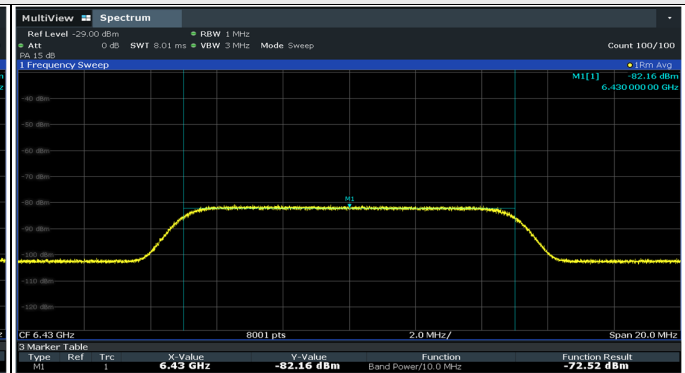

802.11be (EHT160) / CH111(Low Edge)

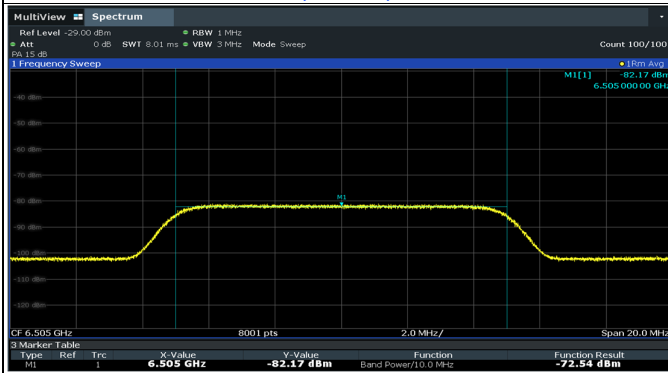


802.11be (EHT160) / CH111(Middle)

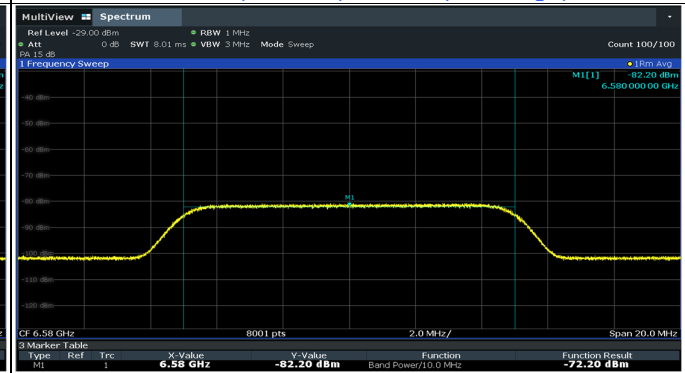

802.11be (EHT160) / CH111(High Edge)


Plots of EUT ceased transmission in the time domain

UNI6_BW20_CH105_6475_TRS

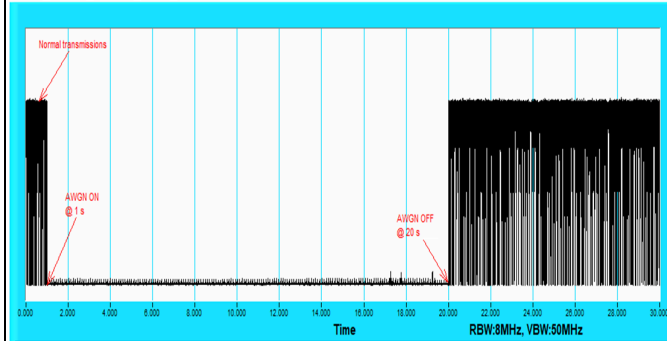


802.11be (EHT20) / CH105

UNI6_BW160_CH111_6430_TRS

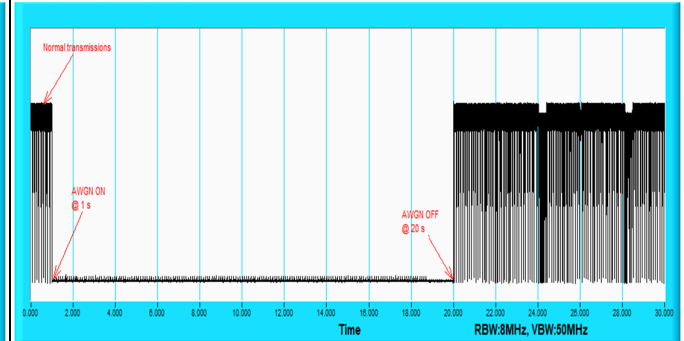


802.11be (EHT160) / CH111(Low Edge)

UNI6_BW160_CH111_6505_TRS

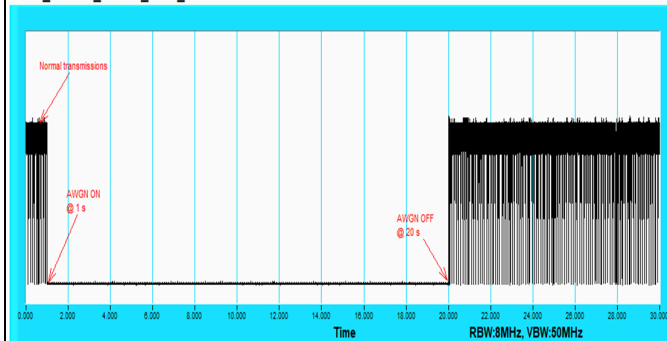

802.11be (EHT160) / CH111(Middle)

UNI6_BW160_CH111_6580_TRS

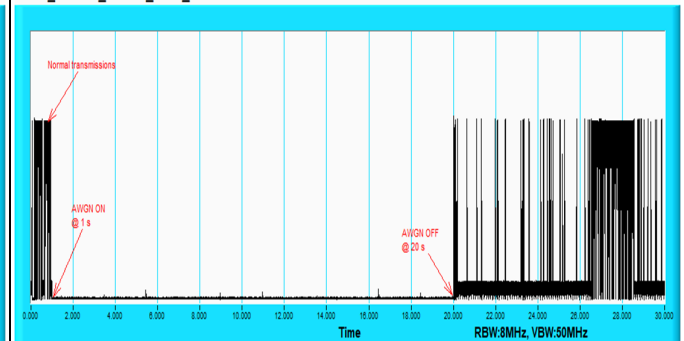

802.11be (EHT160) / CH111(High Edge)

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-82.3	-20	0	-62.3	-62	OFF
					-82.8	-20	0	-62.8	-62	Minimal
					-102	-20	0	-82	-62	ON
	160	143	6665	6590	-82.22	-20	0	-62.22	-62	OFF
					-82.72	-20	0	-62.72	-62	Minimal
					-102	-20	0	-82	-62	ON
				6665	-82.13	-20	0	-62.13	-62	OFF
					-82.63	-20	0	-62.63	-62	Minimal
					-102	-20	0	-82	-62	ON
				6740	-82.23	-20	0	-62.23	-62	OFF
					-82.73	-20	0	-62.73	-62	Minimal
					-102	-20	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6665	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

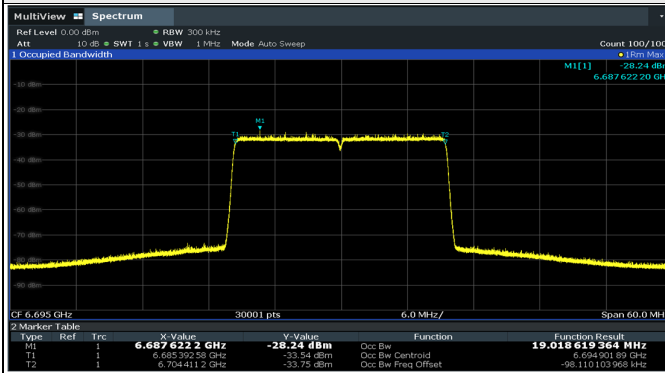


802.11be (EHT20) / CH149




802.11be (EHT160) / CH143


Plots of Injected signal (AWGN) level

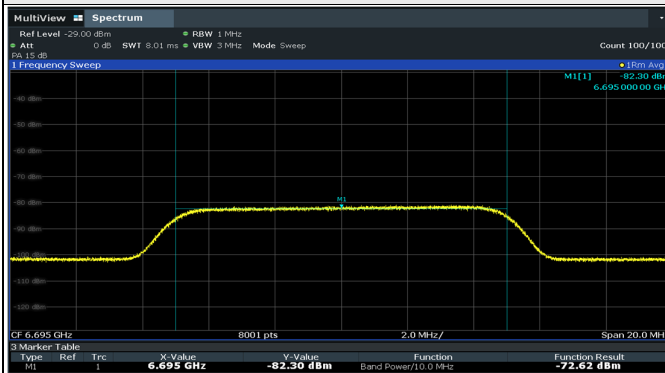


802.11be (EHT20) / CH149

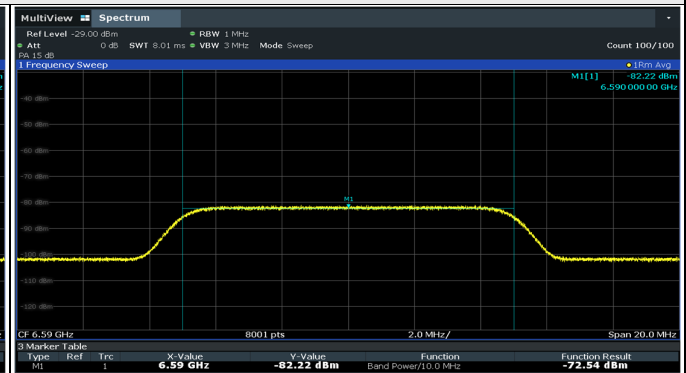

802.11be (EHT160) / CH143(Low Edge)

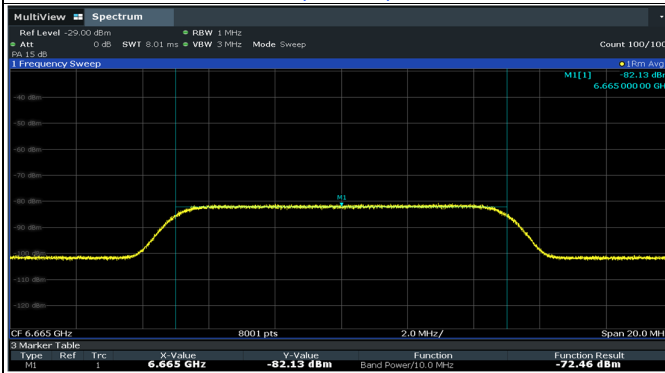


802.11be (EHT160) / CH143(Middle)

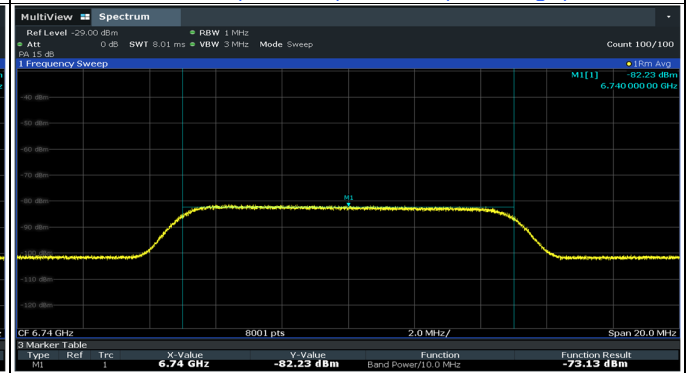

802.11be (EHT160) / CH143(High Edge)


Plots of EUT ceased transmission in the time domain

UNI17_BW20_CH149_6695_TRS

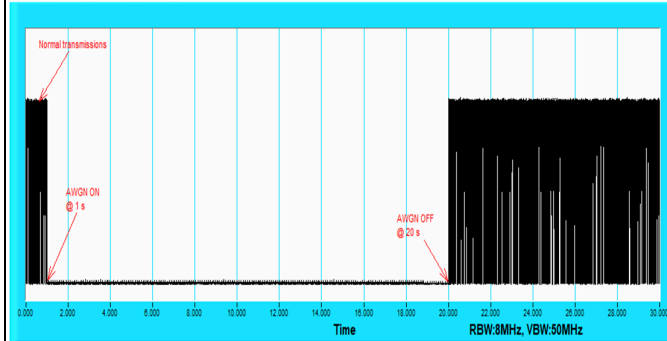


802.11be (EHT20) / CH149

UNI17_BW160_CH143_6590_TRS

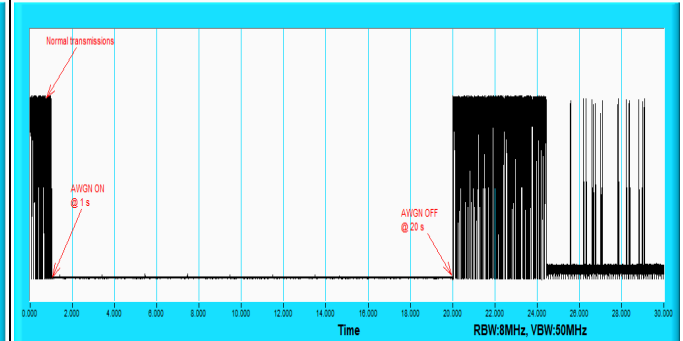


802.11be (EHT160) / CH143(Low Edge)

UNI17_BW160_CH143_6665_TRS

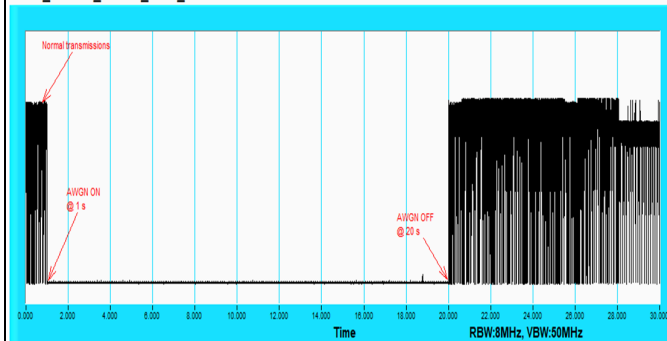

802.11be (EHT160) / CH143(Middle)

UNI17_BW160_CH143_6740_TRS

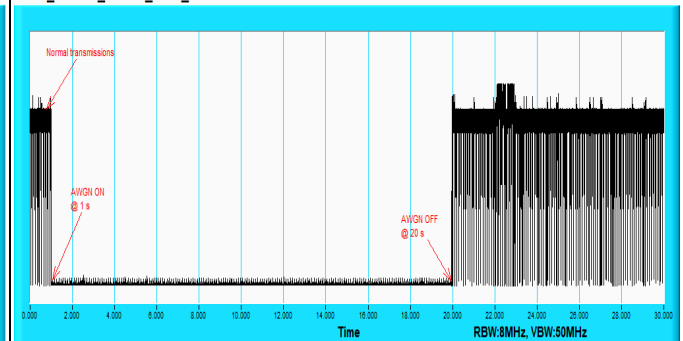

802.11be (EHT160) / CH143(High Edge)

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-82.14	-20	0	-62.14	-62	OFF
					-82.64	-20	0	-62.64	-62	Minimal
					-102	-20	0	-82	-62	ON
	160	207	6985	6910	-82.22	-20	0	-62.22	-62	OFF
					-82.72	-20	0	-62.72	-62	Minimal
					-102	-20	0	-82	-62	ON
				6985	-82.13	-20	0	-62.13	-62	OFF
					-82.63	-20	0	-62.63	-62	Minimal
					-102	-20	0	-82	-62	ON
				7060	-82.12	-20	0	-62.12	-62	OFF
					-82.62	-20	0	-62.62	-62	Minimal
					-102	-20	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
	160	6910	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6985	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

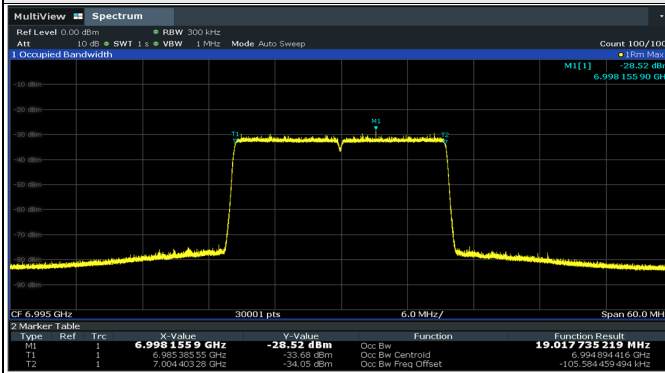


802.11be (EHT20) / CH209




802.11be (EHT160) / CH207


Plots of Injected signal (AWGN) level

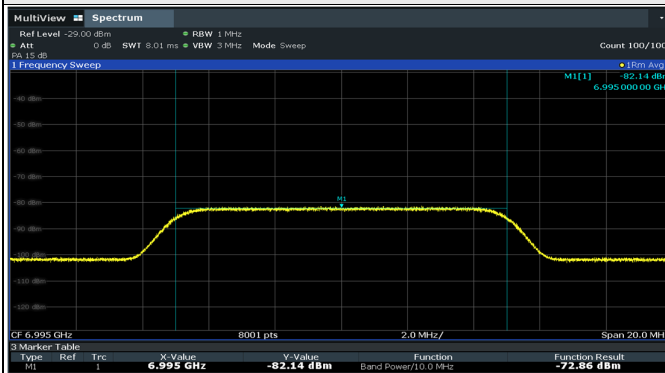


802.11be (EHT20) / CH209

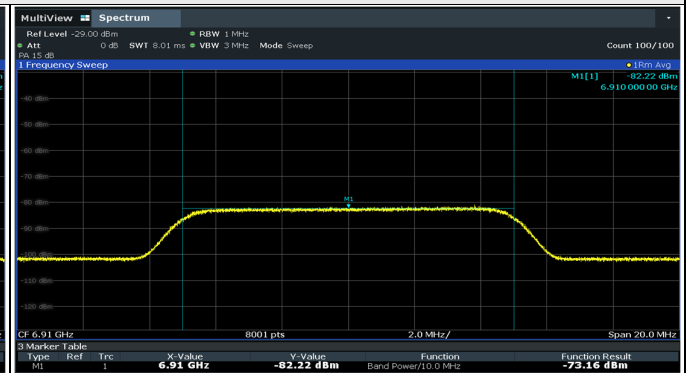

802.11be (EHT160) / CH207(Low Edge)

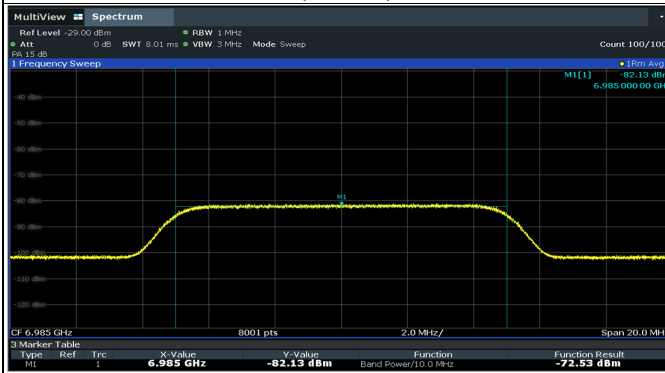


802.11be (EHT160) / CH207(Middle)

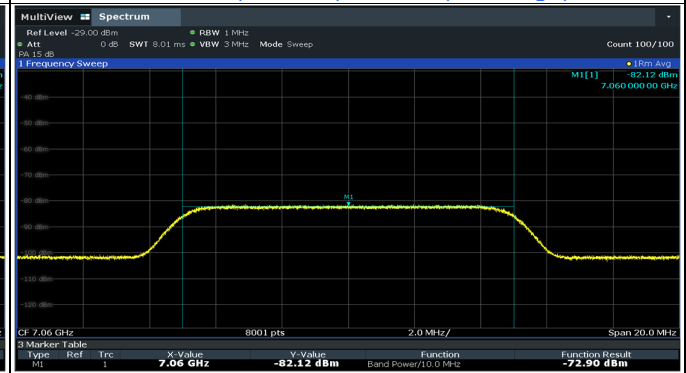

802.11be (EHT160) / CH207(High Edge)


Plots of EUT ceased transmission in the time domain

UNII8_BW20_CH209_6995_TRS

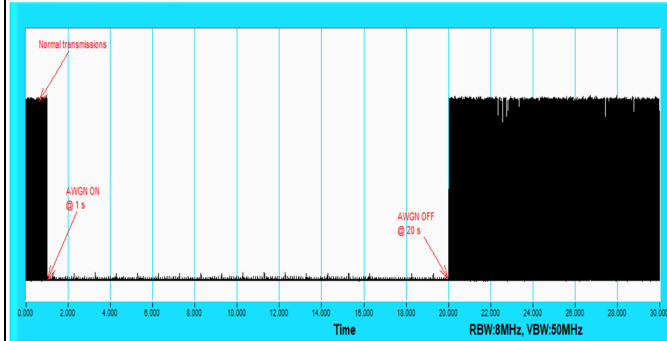


802.11be (EHT20) / CH209

UNII8_BW160_CH207_6910_TRS

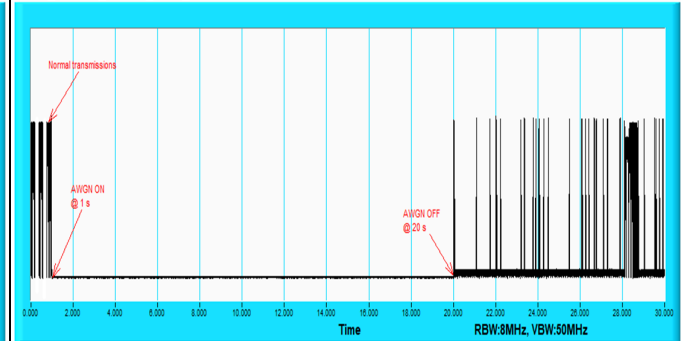


802.11be (EHT160) / CH207(Low Edge)

UNII8_BW160_CH207_6985_TRS

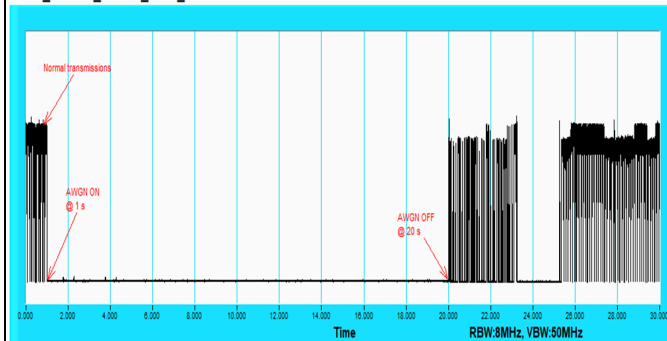

802.11be (EHT160) / CH207(Middle)

UNII8_BW160_CH207_7060_TRS

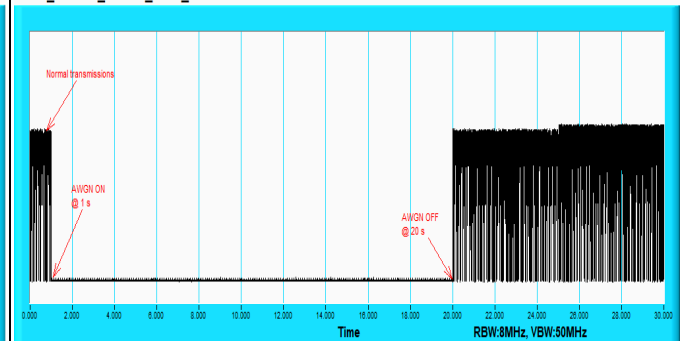

802.11be (EHT160) / CH207(High Edge)

7.7 AC Power Conducted Emissions

under control of a low-power indoor AP

Mode C


1Tx

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29 °C, 50% RH
Tested By	Roy Mai		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	9.97	36.41	24.09	46.38	34.06	63.91	53.91	-17.53	-19.85
2	0.25547	9.98	27.93	18.08	37.91	28.06	61.58	51.58	-23.67	-23.52
3	0.32578	9.99	25.37	19.66	35.36	29.65	59.56	49.56	-24.20	-19.91
4	0.47422	10.01	16.86	5.54	26.87	15.55	56.44	46.44	-29.57	-30.89
5	3.20703	10.18	12.19	5.89	22.37	16.07	56.00	46.00	-33.63	-29.93
6	17.93750	11.15	28.02	24.20	39.17	35.35	60.00	50.00	-20.83	-14.65

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

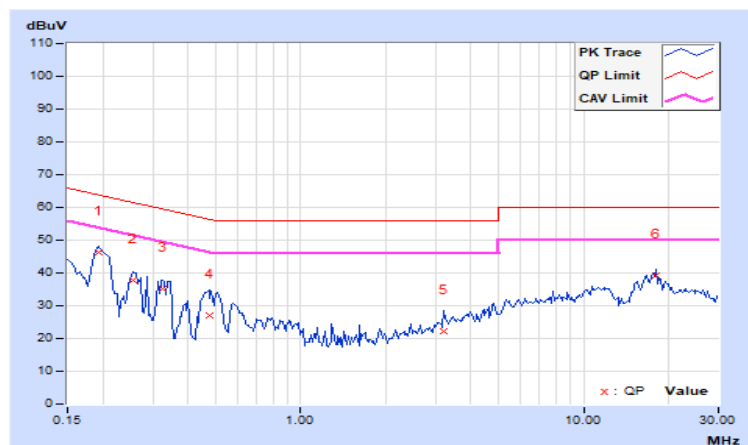


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29 °C, 50% RH
Tested By	Roy Mai		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	9.98	36.05	24.39	46.03	34.37	63.91	53.91	-17.88	-19.54
2	0.33359	9.95	22.84	11.15	32.79	21.10	59.36	49.36	-26.57	-28.26
3	0.50547	9.95	23.01	13.61	32.96	23.56	56.00	46.00	-23.04	-22.44
4	0.58359	9.96	20.97	16.64	30.93	26.60	56.00	46.00	-25.07	-19.40
5	10.94141	10.51	21.77	16.36	32.28	26.87	60.00	50.00	-27.72	-23.13
6	17.75000	10.86	28.01	23.49	38.87	34.35	60.00	50.00	-21.13	-15.65

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

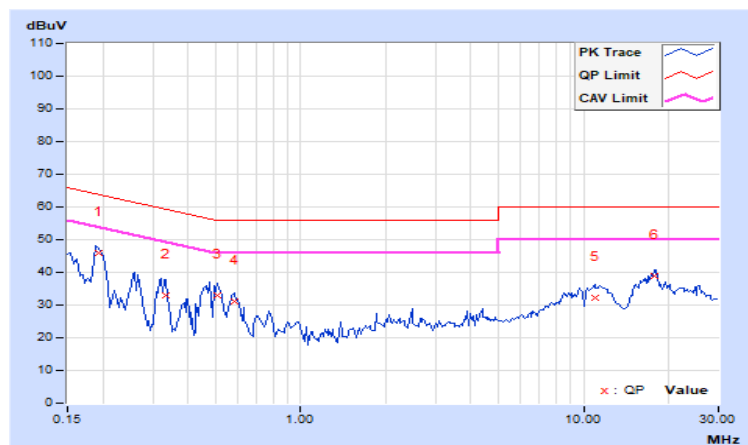

under control of a Standard Power AP

Mode C


2Tx

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29 °C, 50% RH
Tested By	Roy Mai		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	26.57	9.90	36.54	19.87	66.00	56.00	-29.46	-36.13
2	0.19297	9.97	36.05	24.09	46.02	34.06	63.91	53.91	-17.89	-19.85
3	0.26328	9.98	27.50	18.23	37.48	28.21	61.33	51.33	-23.85	-23.12
4	0.51328	10.01	21.31	15.85	31.32	25.86	56.00	46.00	-24.68	-20.14
5	4.66406	10.28	15.28	9.39	25.56	19.67	56.00	46.00	-30.44	-26.33
6	17.74609	11.14	27.83	23.33	38.97	34.47	60.00	50.00	-21.03	-15.53

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

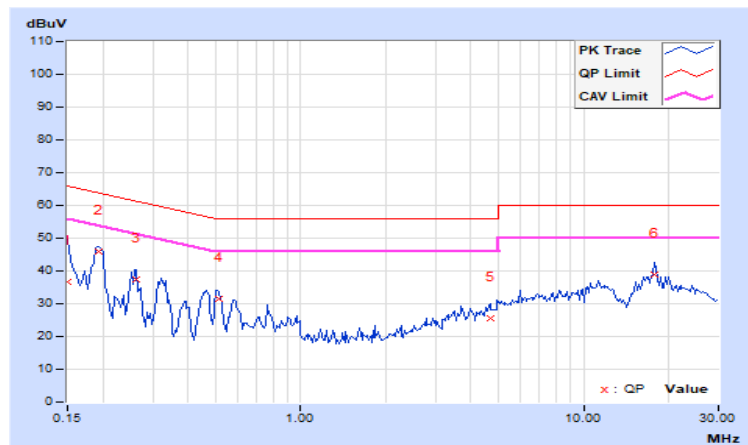


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29 °C, 50% RH
Tested By	Roy Mai		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.99	26.52	9.89	36.51	19.88	66.00	56.00	-29.49	-36.12
2	0.19297	9.98	36.14	23.67	46.12	33.65	63.91	53.91	-17.79	-20.26
3	0.49375	9.95	20.11	5.74	30.06	15.69	56.10	46.10	-26.04	-30.41
4	0.58359	9.96	20.99	16.70	30.95	26.66	56.00	46.00	-25.05	-19.34
5	1.85547	10.06	12.04	6.61	22.10	16.67	56.00	46.00	-33.90	-29.33
6	11.42969	10.54	21.92	16.59	32.46	27.13	60.00	50.00	-27.54	-22.87
7	17.93750	10.87	28.28	24.40	39.15	35.27	60.00	50.00	-20.85	-14.73

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

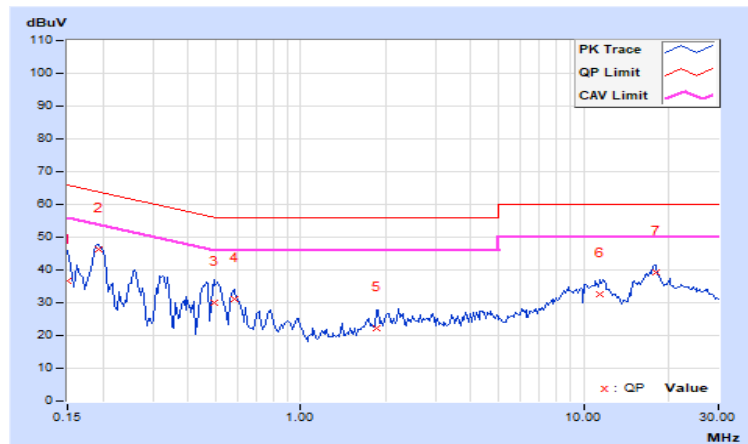

7.8 Unwanted Emissions below 1 GHz

under control of a low-power indoor AP

Mode A


1Tx

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	52.92	28 PK	40	-12	-76.88	9.62	-67.26
2	127.73	29.24 PK	43.5	-14.26	-75.64	9.62	-66.02
3	281.23	28.48 PK	46	-17.52	-76.4	9.62	-66.78
4	454.25	29.67 PK	46	-16.33	-75.21	9.62	-65.59
5	768.29	29.48 PK	46	-16.52	-75.4	9.62	-65.78
6	807.09	30.81 PK	46	-15.19	-74.07	9.62	-64.45

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

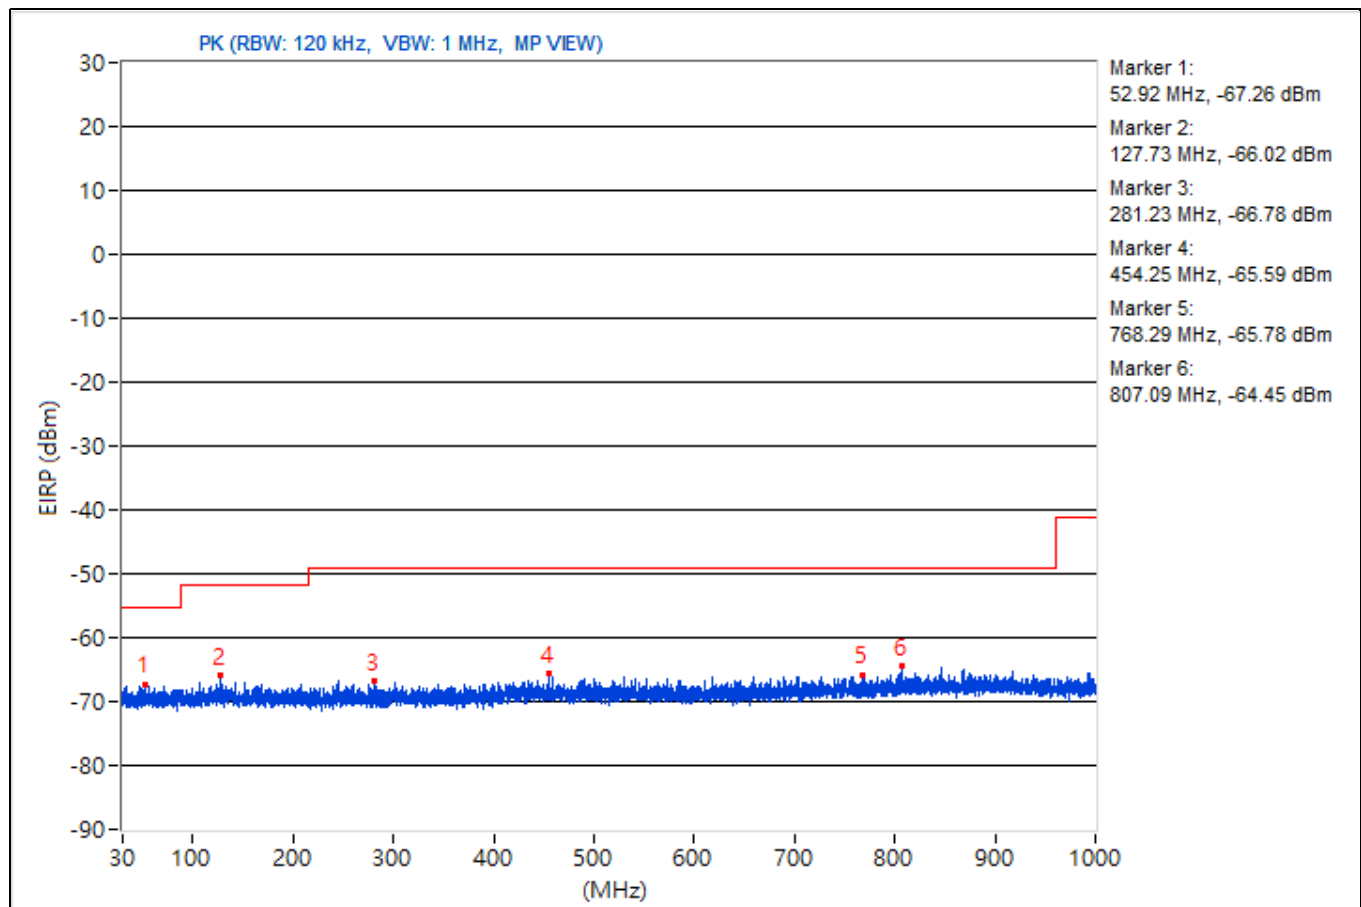


2Tx

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	46.98	30.3 PK	40	-9.7	-79.38	-76.32	9.62	-64.96
2	123.36	31.04 PK	43.5	-12.46	-78.16	-75.84	9.62	-64.22
3	251.52	30.53 PK	46	-15.47	-78.12	-76.71	9.62	-64.73
4	519	31.17 PK	46	-14.83	-78.2	-75.63	9.62	-64.09
5	781.14	32 PK	46	-14	-75.12	-76.83	9.62	-63.26
6	903.85	33.22 PK	46	-12.78	-74.73	-74.61	9.62	-62.04

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

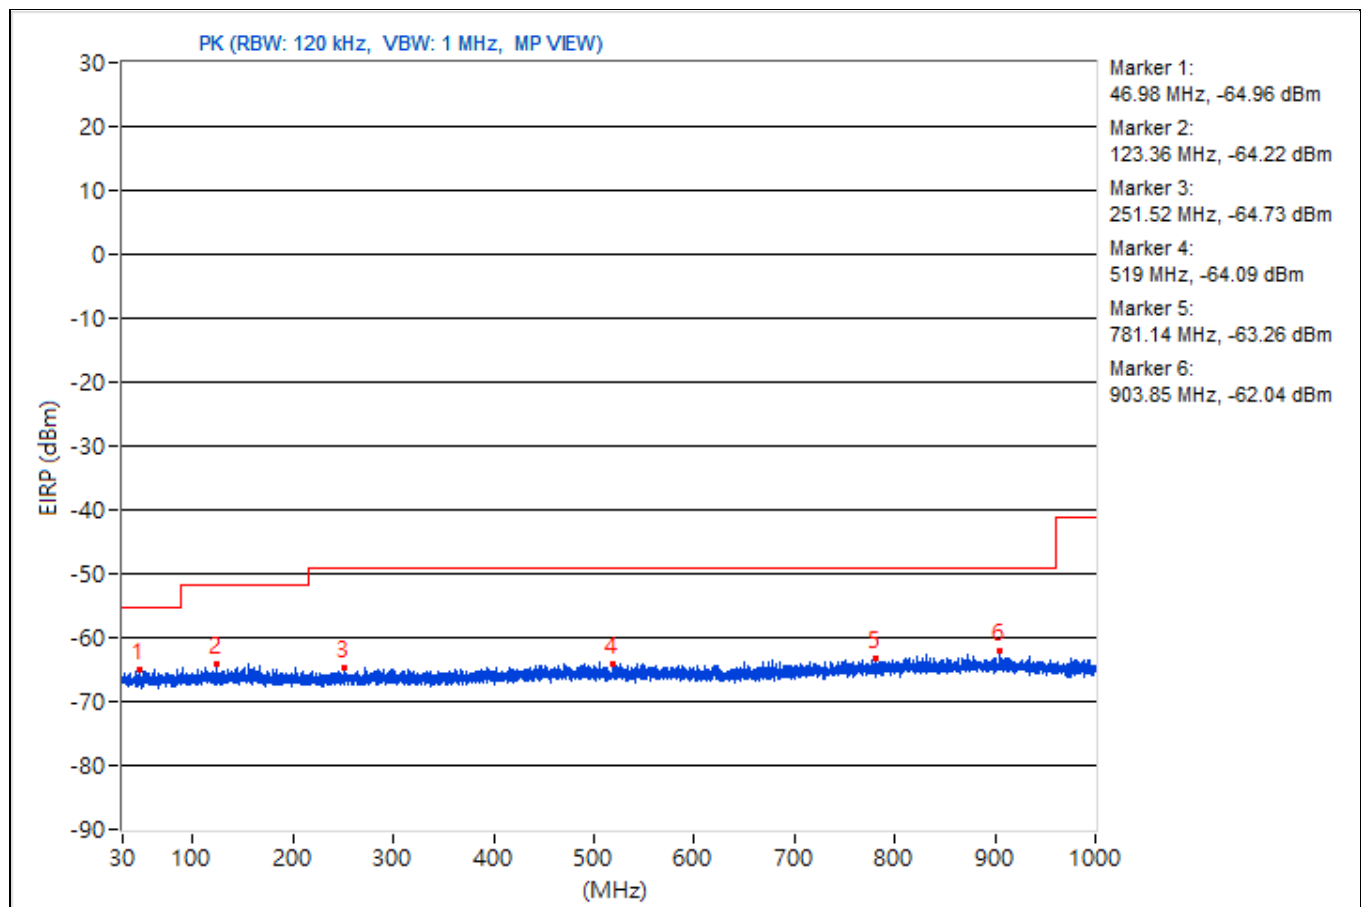

Mode B


1Tx

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.71	14.3 PK	40.0	-25.7	1.50 H	75	33.0	-18.7
2	199.19	32.2 PK	43.5	-11.3	1.00 H	1	53.2	-21.0
3	344.93	31.0 PK	46.0	-15.0	1.00 H	360	47.3	-16.3
4	498.90	36.8 PK	46.0	-9.2	2.00 H	355	49.5	-12.7
5	551.93	28.8 PK	46.0	-17.2	2.00 H	301	40.4	-11.6
6	981.93	24.5 PK	54.0	-29.5	1.00 H	320	29.7	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

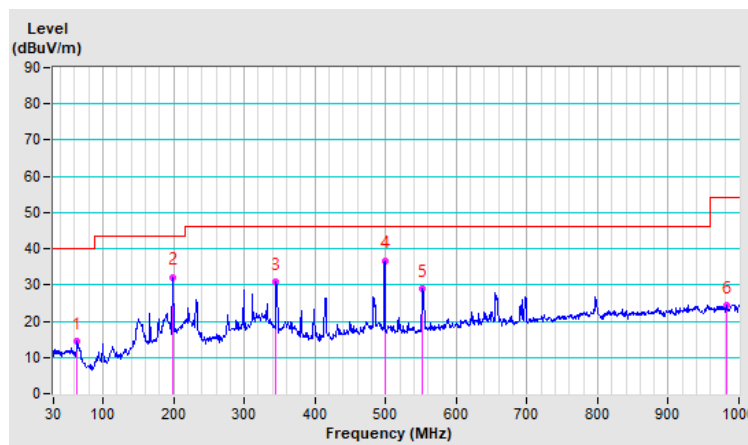


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.57	29.3 PK	40.0	-10.7	1.50 V	1	47.4	-18.1
2	66.52	28.4 PK	40.0	-11.6	1.50 V	1	47.6	-19.2
3	199.17	27.1 PK	43.5	-16.4	2.00 V	276	48.1	-21.0
4	344.96	35.0 PK	46.0	-11.0	2.00 V	360	51.3	-16.3
5	413.93	33.8 PK	46.0	-12.2	2.00 V	171	48.2	-14.4
6	497.88	34.3 PK	46.0	-11.7	1.50 V	120	47.0	-12.7
7	554.09	32.6 PK	46.0	-13.4	2.00 V	352	44.2	-11.6
8	657.98	32.5 PK	46.0	-13.5	1.50 V	319	41.9	-9.4
9	982.78	25.3 PK	54.0	-28.7	1.00 V	156	30.5	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

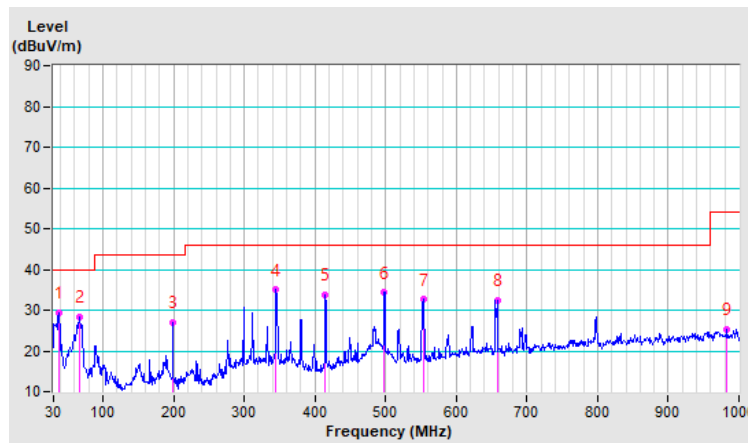


2Tx

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.32	14.0 PK	40.0	-26.0	1.00 H	79	32.7	-18.7
2	150.50	21.6 PK	43.5	-21.9	2.00 H	360	39.1	-17.5
3	199.22	32.2 PK	43.5	-11.3	1.50 H	148	53.2	-21.0
4	310.50	29.1 PK	46.0	-16.9	1.50 H	360	45.9	-16.8
5	344.93	31.2 PK	46.0	-14.8	1.50 H	360	47.5	-16.3
6	498.85	37.1 PK	46.0	-8.9	2.00 H	350	49.8	-12.7
7	972.99	24.4 PK	54.0	-29.6	4.00 H	214	29.6	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

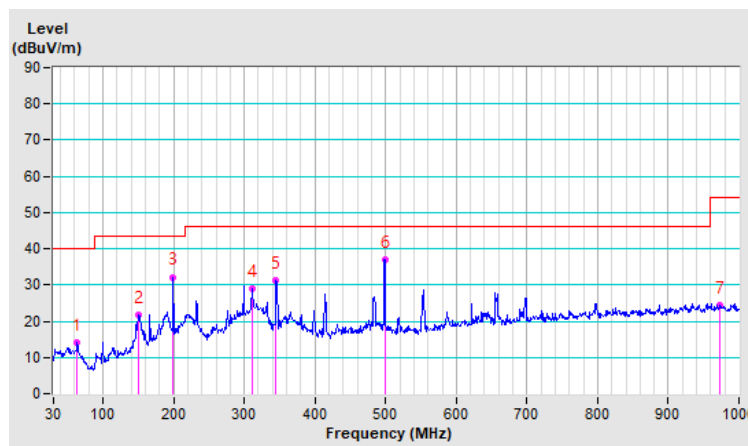


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.85	27.1 PK	40.0	-12.9	1.50 V	172	46.3	-19.2
2	199.53	25.9 PK	43.5	-17.6	2.00 V	297	47.0	-21.1
3	346.27	35.6 PK	46.0	-10.4	1.50 V	8	51.9	-16.3
4	413.90	34.0 PK	46.0	-12.0	1.00 V	30	48.4	-14.4
5	498.87	34.2 PK	46.0	-11.8	1.50 V	114	46.9	-12.7
6	554.12	34.4 PK	46.0	-11.6	1.00 V	2	46.0	-11.6
7	658.00	32.9 PK	46.0	-13.1	1.50 V	315	42.3	-9.4
8	970.71	25.0 PK	54.0	-29.0	2.00 V	301	30.1	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

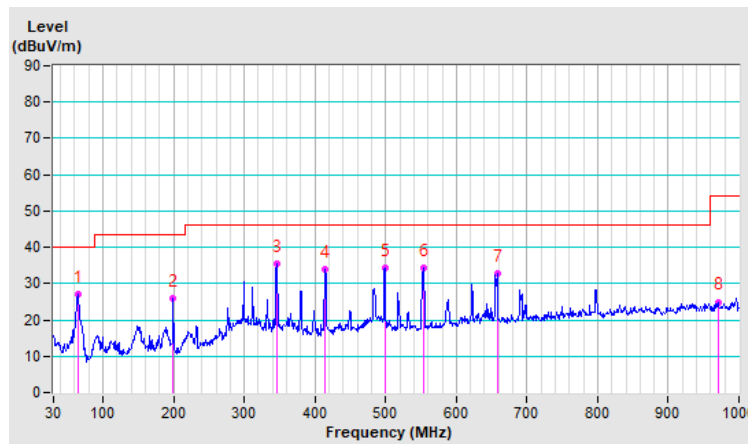

under control of a Standard Power AP

Mode A


1Tx

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	54.37	28.21 PK	40	-11.79	-76.67	9.62	-67.05
2	166.04	28.22 PK	43.5	-15.28	-76.66	9.62	-67.04
3	372.41	28.75 PK	46	-17.25	-76.13	9.62	-66.51
4	457.65	29.23 PK	46	-16.77	-75.65	9.62	-66.03
5	703.18	30.09 PK	46	-15.91	-74.79	9.62	-65.17
6	924.1	30.23 PK	46	-15.77	-74.65	9.62	-65.03

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

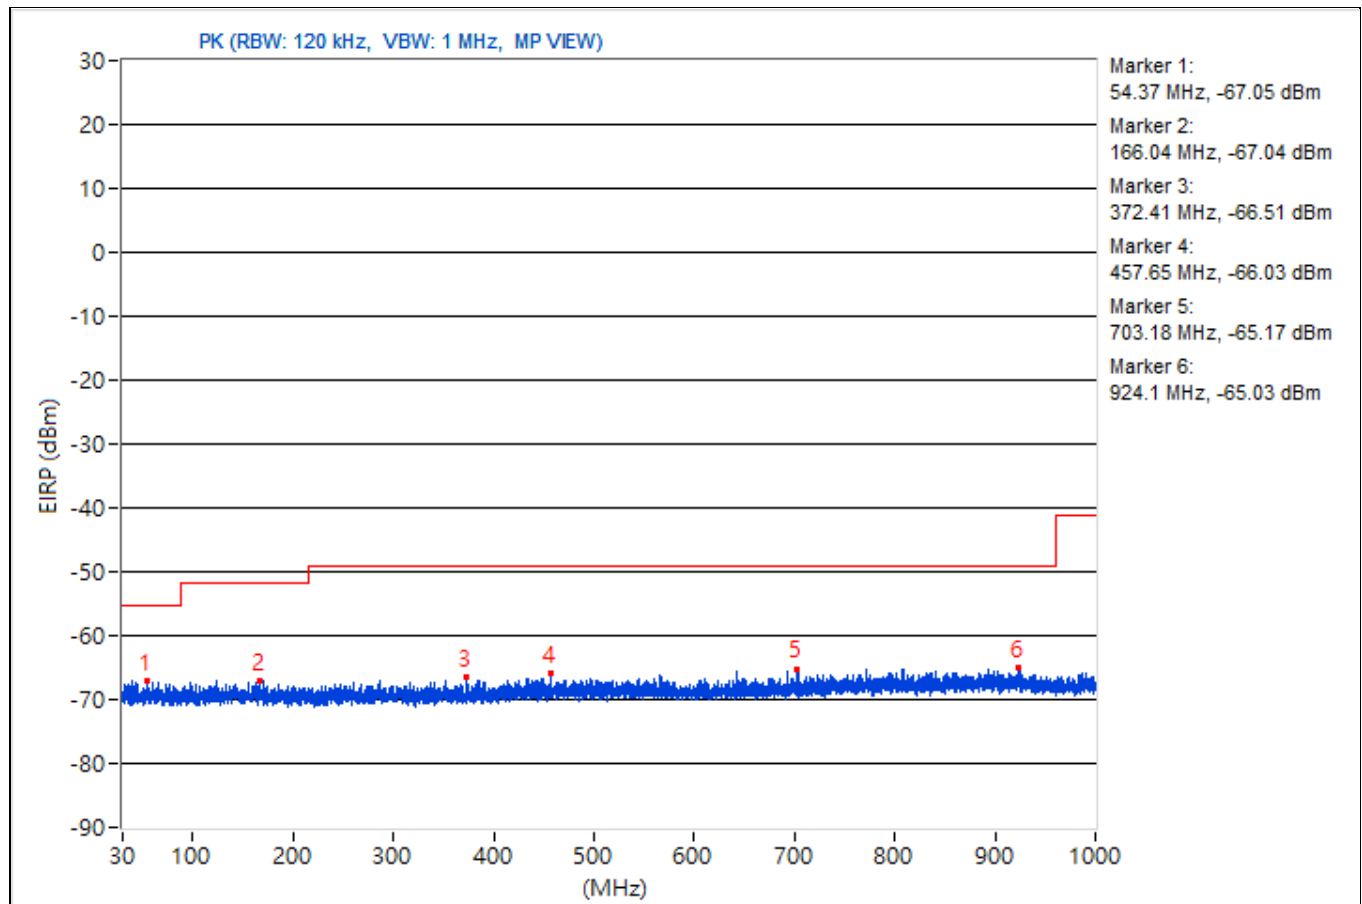


2Tx

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	83.47	30.69 PK	40	-9.31	-79.65	-75.64	9.62	-64.57
2	140.34	30.45 PK	43.5	-13.05	-76.32	-78.95	9.62	-64.81
3	286.08	30.78 PK	46	-15.22	-78.83	-75.88	9.62	-64.48
4	551.01	31.72 PK	46	-14.28	-78.12	-74.83	9.62	-63.54
5	710.09	31.78 PK	46	-14.22	-74.47	-78.78	9.62	-63.48
6	928.34	32.36 PK	46	-13.64	-76.72	-74.6	9.62	-62.9

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

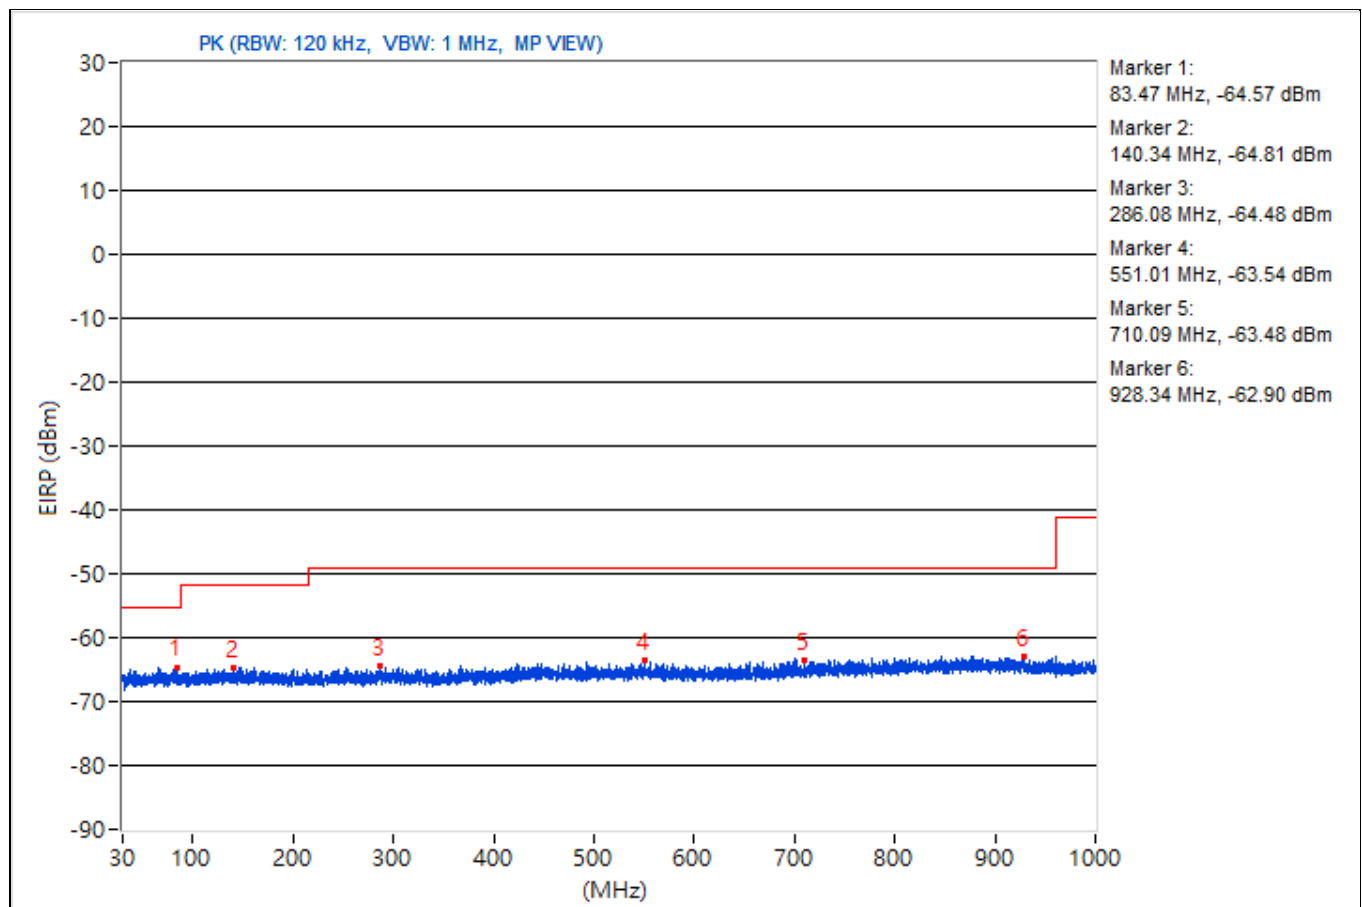

Mode B


1Tx

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.32	14.8 PK	40.0	-25.2	1.00 H	100	33.5	-18.7
2	199.53	31.7 PK	43.5	-11.8	1.50 H	162	52.8	-21.1
3	344.98	31.1 PK	46.0	-14.9	1.00 H	360	47.4	-16.3
4	497.88	36.5 PK	46.0	-9.5	2.00 H	349	49.2	-12.7
5	655.33	27.9 PK	46.0	-18.1	1.50 H	222	37.3	-9.4
6	972.40	24.4 PK	54.0	-29.6	1.50 H	311	29.5	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

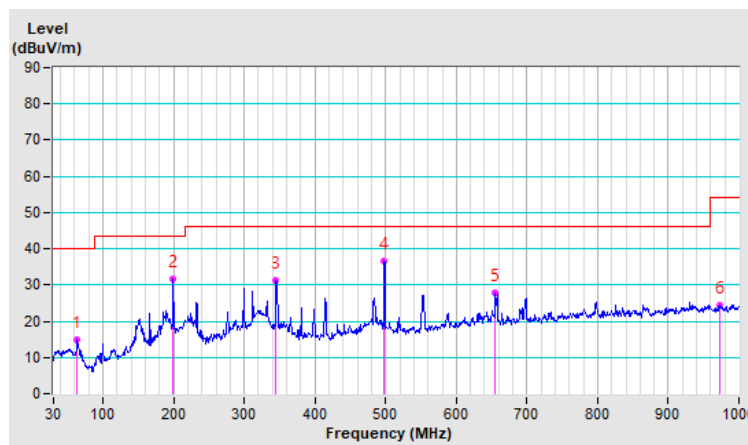


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.44	27.9 PK	40.0	-12.1	1.00 V	154	46.8	-18.9
2	199.22	28.2 PK	43.5	-15.3	1.50 V	280	49.2	-21.0
3	346.29	36.2 PK	46.0	-9.8	1.50 V	45	52.5	-16.3
4	379.49	33.1 PK	46.0	-12.9	1.00 V	1	48.3	-15.2
5	415.55	33.8 PK	46.0	-12.2	1.00 V	128	48.1	-14.3
6	497.86	33.9 PK	46.0	-12.1	1.50 V	108	46.6	-12.7
7	551.88	33.0 PK	46.0	-13.0	1.00 V	1	44.6	-11.6
8	658.00	33.6 PK	46.0	-12.4	1.50 V	192	43.0	-9.4
9	992.09	24.5 PK	54.0	-29.5	2.00 V	141	29.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

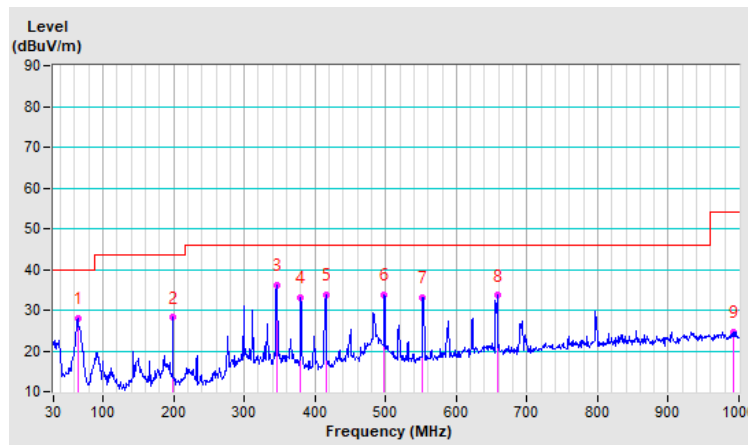


2Tx

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.88	13.5 PK	40.0	-26.5	3.00 H	142	31.4	-17.9
2	199.19	32.4 PK	43.5	-11.1	1.50 H	145	53.4	-21.0
3	298.76	29.5 PK	46.0	-16.5	1.00 H	205	46.7	-17.2
4	346.27	30.8 PK	46.0	-15.2	1.00 H	360	47.1	-16.3
5	413.97	28.5 PK	46.0	-17.5	2.00 H	121	42.9	-14.4
6	498.90	36.6 PK	46.0	-9.4	2.00 H	350	49.3	-12.7
7	554.09	28.1 PK	46.0	-17.9	2.00 H	303	39.7	-11.6
8	655.36	28.3 PK	46.0	-17.7	1.50 H	227	37.7	-9.4
9	959.65	24.6 PK	46.0	-21.4	1.50 H	40	29.8	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

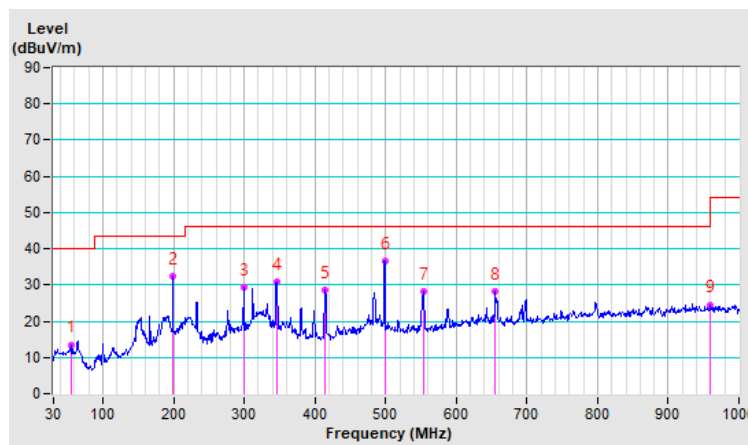


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.17	25.9 PK	40.0	-14.1	2.00 V	360	44.7	-18.8
2	199.19	26.1 PK	43.5	-17.4	2.00 V	270	47.1	-21.0
3	346.32	35.1 PK	46.0	-10.9	1.50 V	11	51.4	-16.3
4	380.87	32.4 PK	46.0	-13.6	1.50 V	360	47.6	-15.2
5	415.55	34.7 PK	46.0	-11.3	1.50 V	1	49.0	-14.3
6	498.90	34.2 PK	46.0	-11.8	1.50 V	113	46.9	-12.7
7	554.07	34.0 PK	46.0	-12.0	1.50 V	1	45.6	-11.6
8	655.41	33.3 PK	46.0	-12.7	1.50 V	1	42.7	-9.4
9	967.55	25.1 PK	54.0	-28.9	1.00 V	322	30.2	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

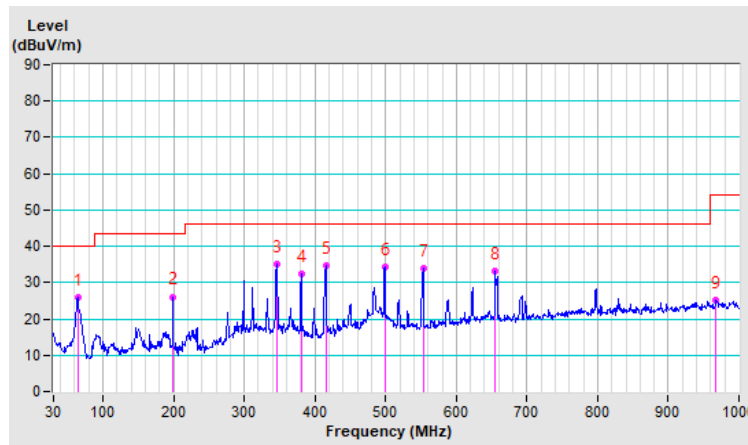

7.9 Unwanted Emissions above 1 GHz

under control of a low-power indoor AP

Mode A



1Tx

Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3712.27	46.3 PK	74	-27.7	-53.88	4.92	-48.96
2	3712.27	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	8066.13	41.46 PK	74	-32.54	-58.72	4.92	-53.8
4	8066.13	34.7 AV	54	-19.3	-65.48	4.92	-60.56
5	20730	44.09 PK	74	-29.91	-56.09	4.92	-51.17
6	20730	35.88 AV	54	-18.12	-64.3	4.92	-59.38
7	23796.5	47.28 PK	74	-26.72	-52.9	4.92	-47.98
8	23796.5	36.97 AV	54	-17.03	-63.21	4.92	-58.29
9	38669.69	43.59 PK	74	-30.41	-56.59	4.92	-51.67
10	38669.69	33.3 AV	54	-20.7	-66.88	4.92	-61.96


Note: Margin value = Emission Level - Limit value

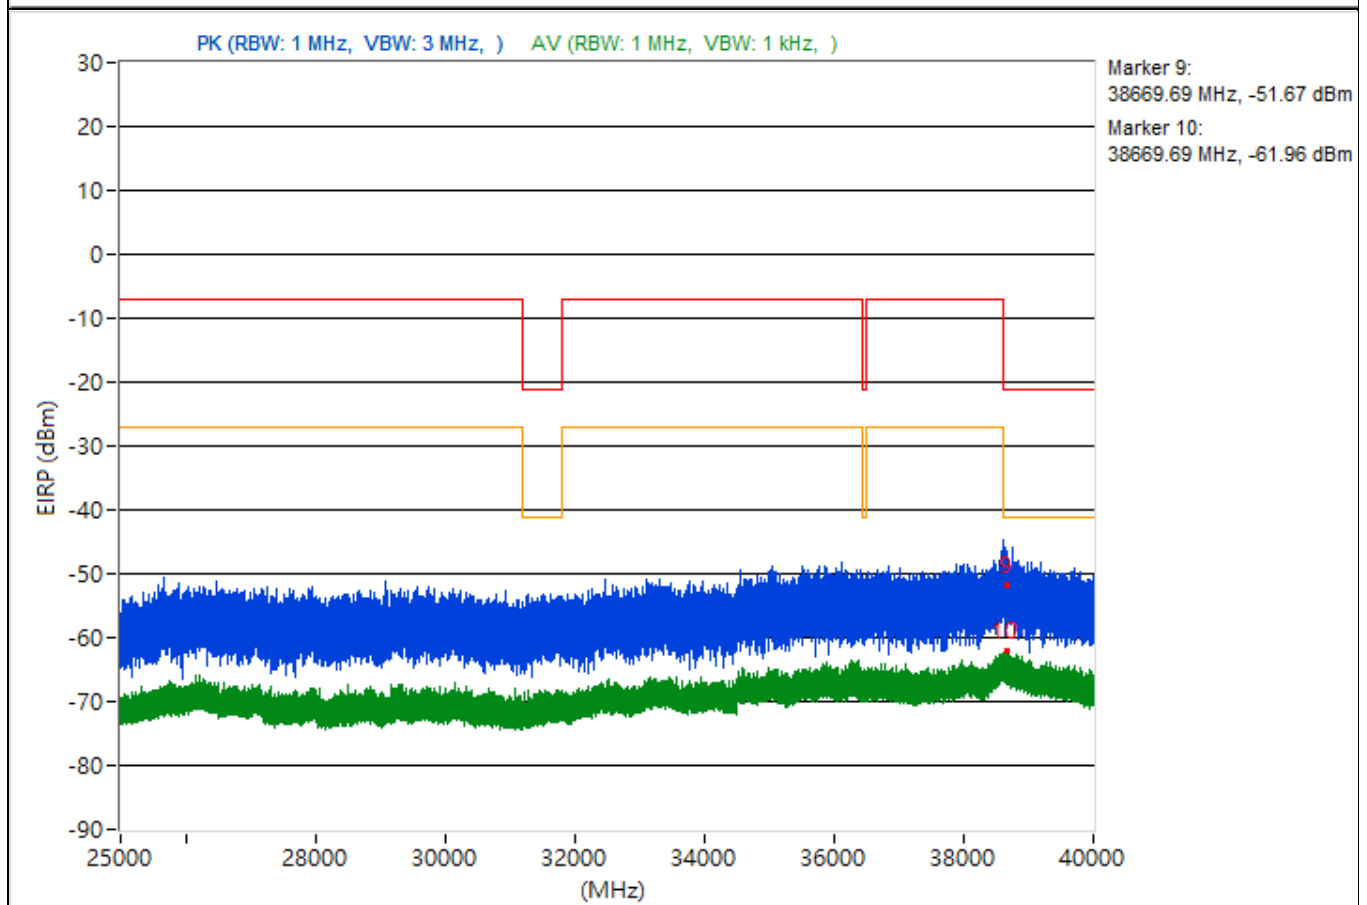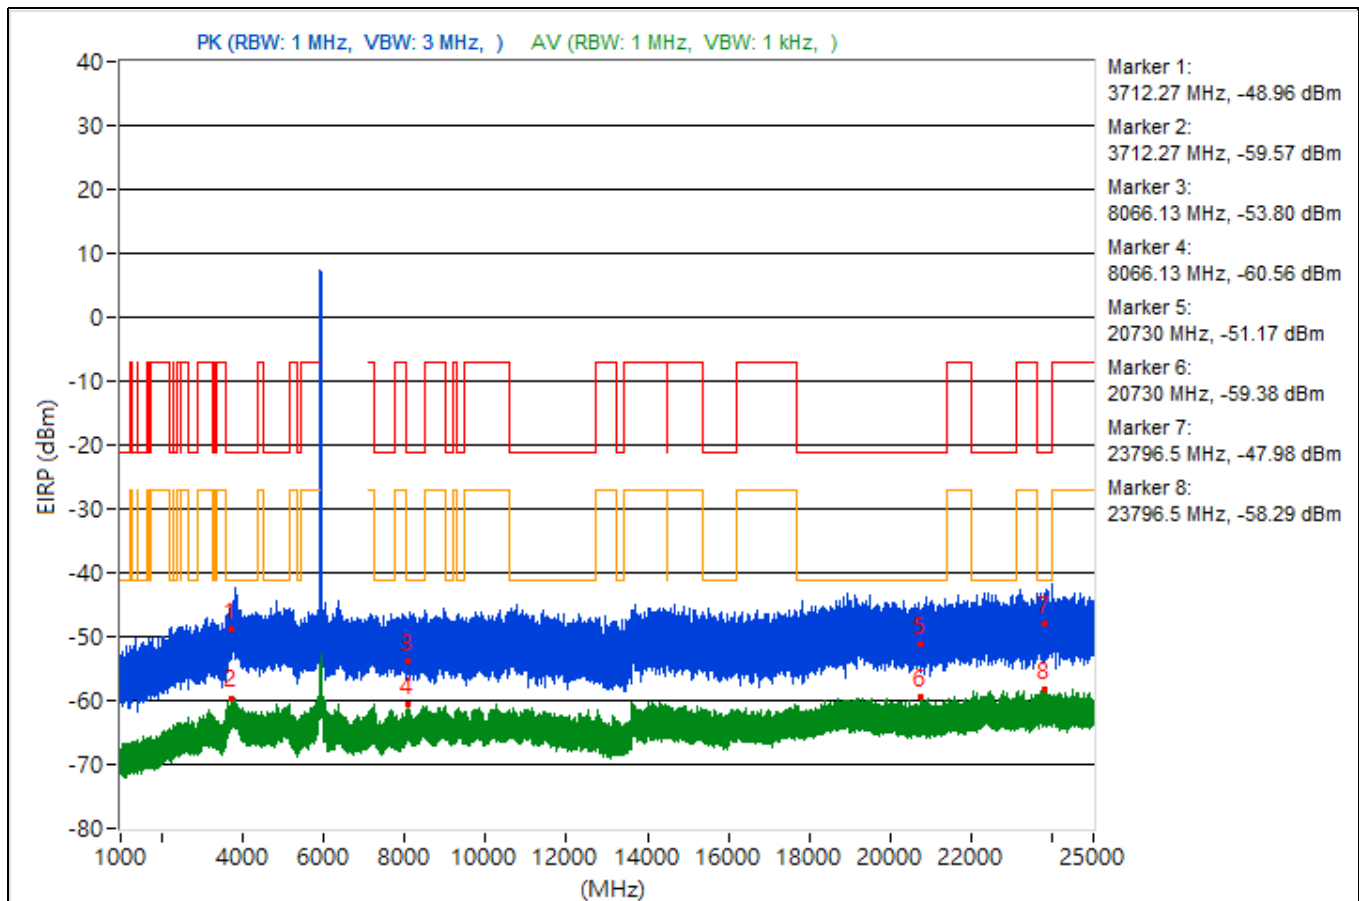


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3836.01	48.43 PK	74	-25.57	-51.75	4.92	-46.83
2	3836.01	35.87 AV	54	-18.13	-64.31	4.92	-59.39
3	10636.18	44.6 PK	74	-29.4	-55.58	4.92	-50.66
4	10636.18	34.52 AV	54	-19.48	-65.66	4.92	-60.74
5	20116.2	43.16 PK	74	-30.84	-57.02	4.92	-52.1
6	20116.2	36.07 AV	54	-17.93	-64.11	4.92	-59.19
7	23704.8	46.02 PK	74	-27.98	-54.16	4.92	-49.24
8	23704.8	37.07 AV	54	-16.93	-63.11	4.92	-58.19
9	38613.51	45.7 PK	74	-28.3	-54.48	4.92	-49.56
10	38613.51	33.16 AV	54	-20.84	-67.02	4.92	-62.1

Note: Margin value = Emission Level - Limit value

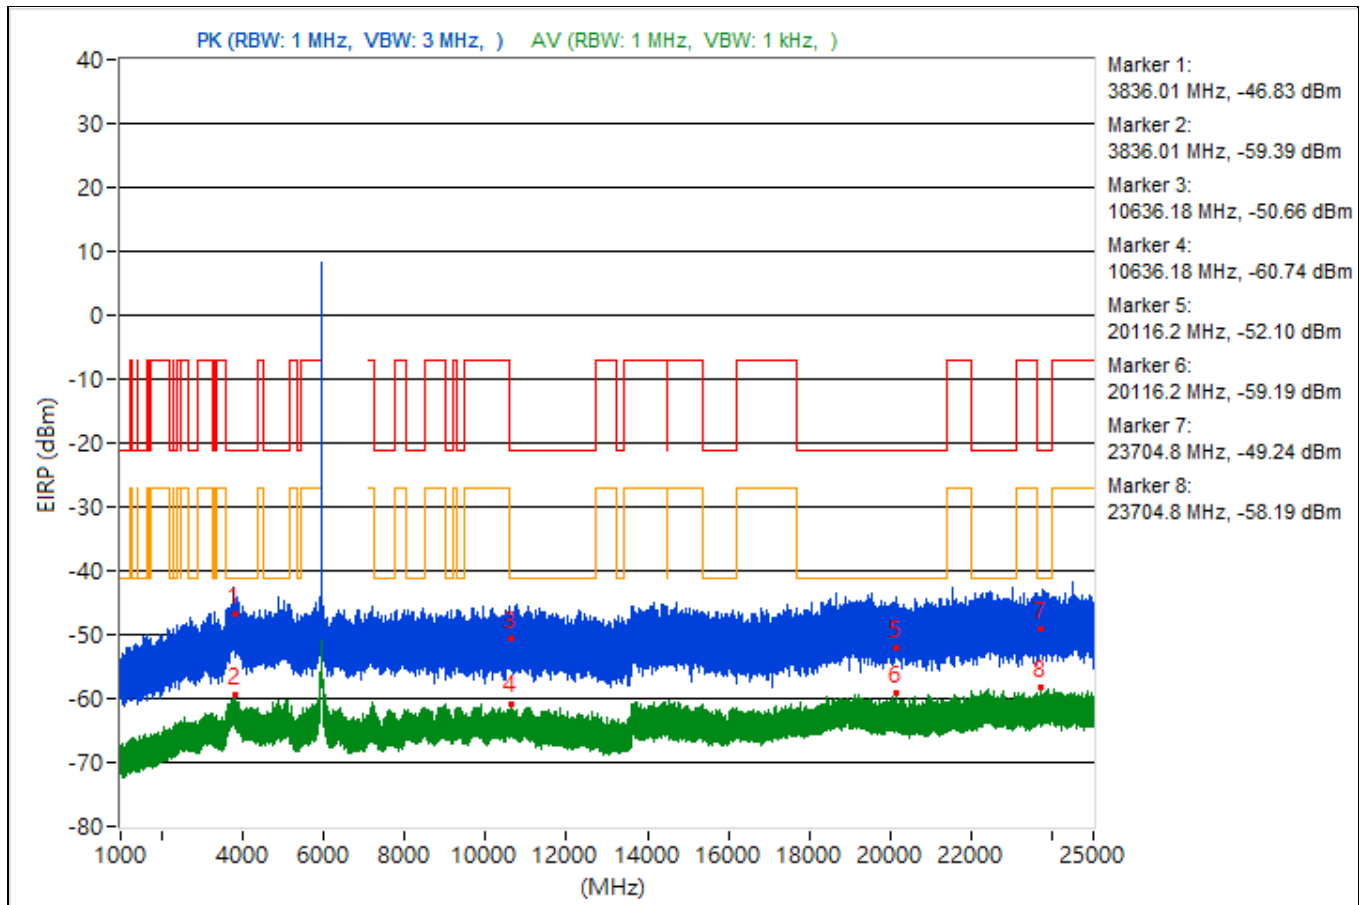


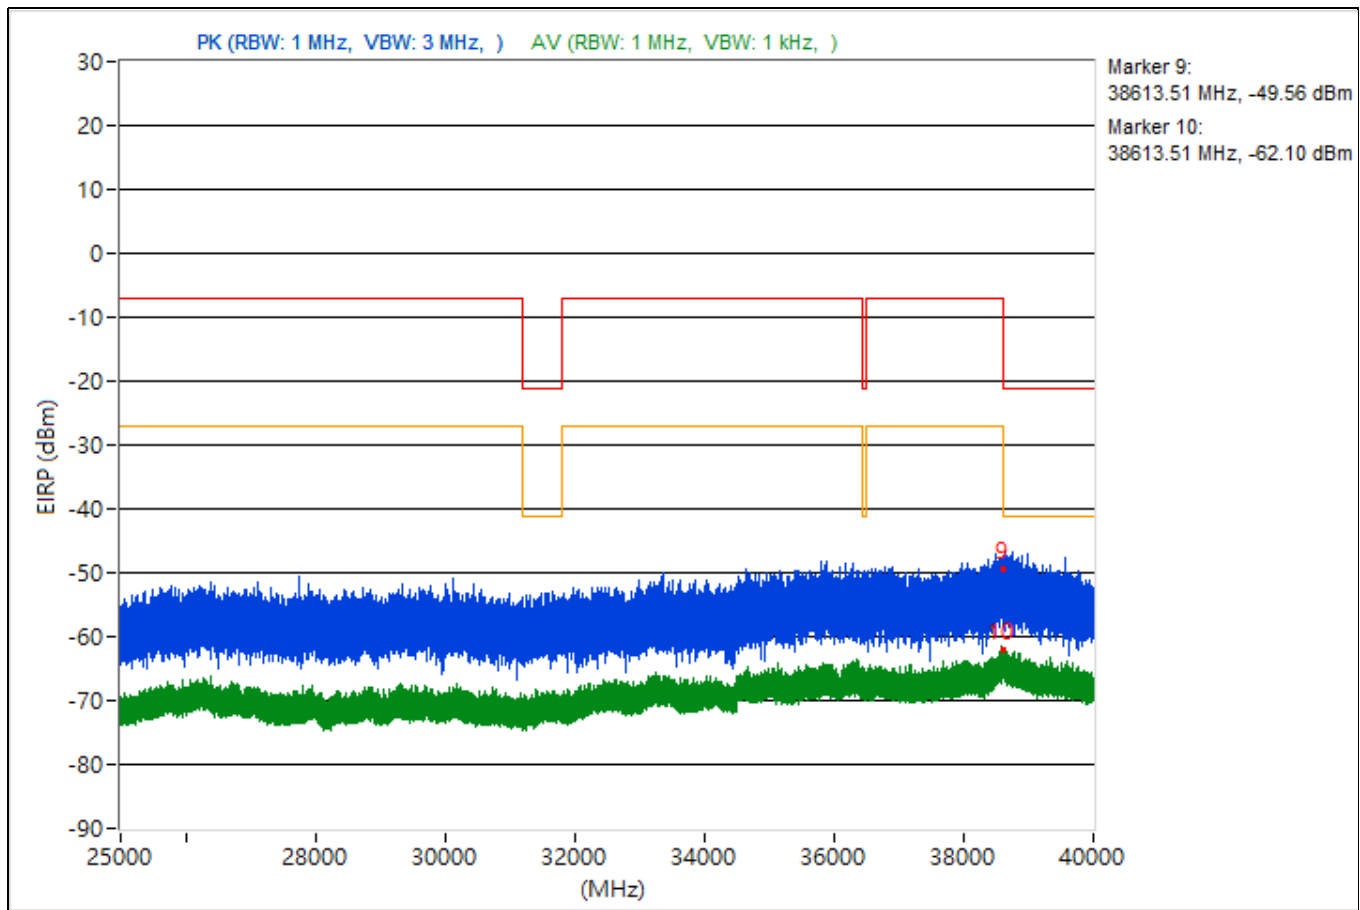


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3755.51	46.57 PK	74	-27.43	-53.61	4.92	-48.69
2	3755.51	35.92 AV	54	-18.08	-64.26	4.92	-59.34
3	9327.02	40.56 PK	74	-33.44	-59.62	4.92	-54.7
4	9327.02	34.68 AV	54	-19.32	-65.5	4.92	-60.58
5	19399.9	44.25 PK	74	-29.75	-55.93	4.92	-51.01
6	19399.9	36.23 AV	54	-17.77	-63.95	4.92	-59.03
7	23623.2	47.47 PK	74	-26.53	-52.71	4.92	-47.79
8	23623.2	36.84 AV	54	-17.16	-63.34	4.92	-58.42
9	38610.84	40.71 PK	74	-33.29	-59.47	4.92	-54.55
10	38610.84	33.59 AV	54	-20.41	-66.59	4.92	-61.67

Note: Margin value = Emission Level - Limit value

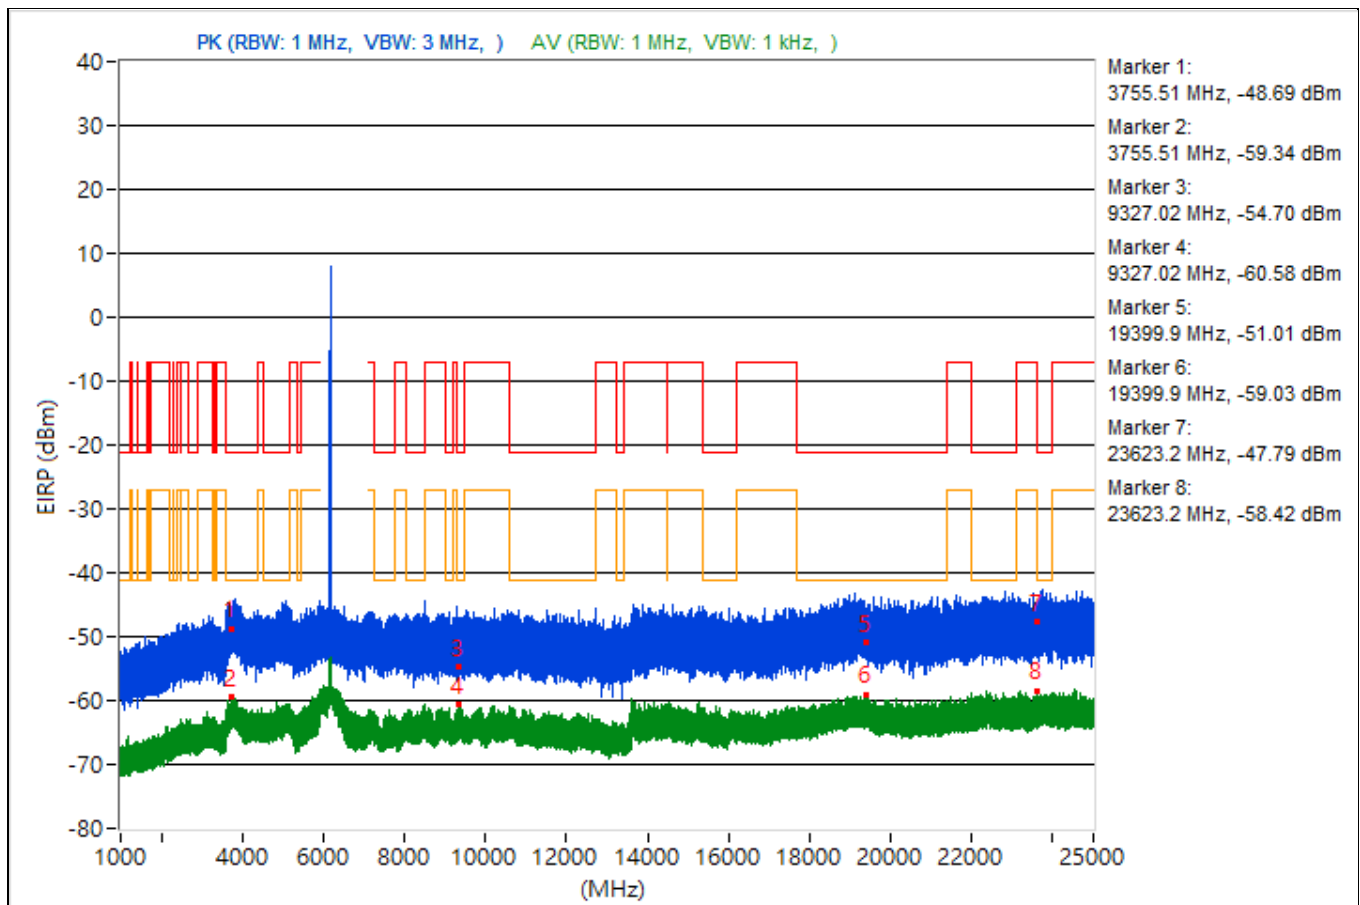


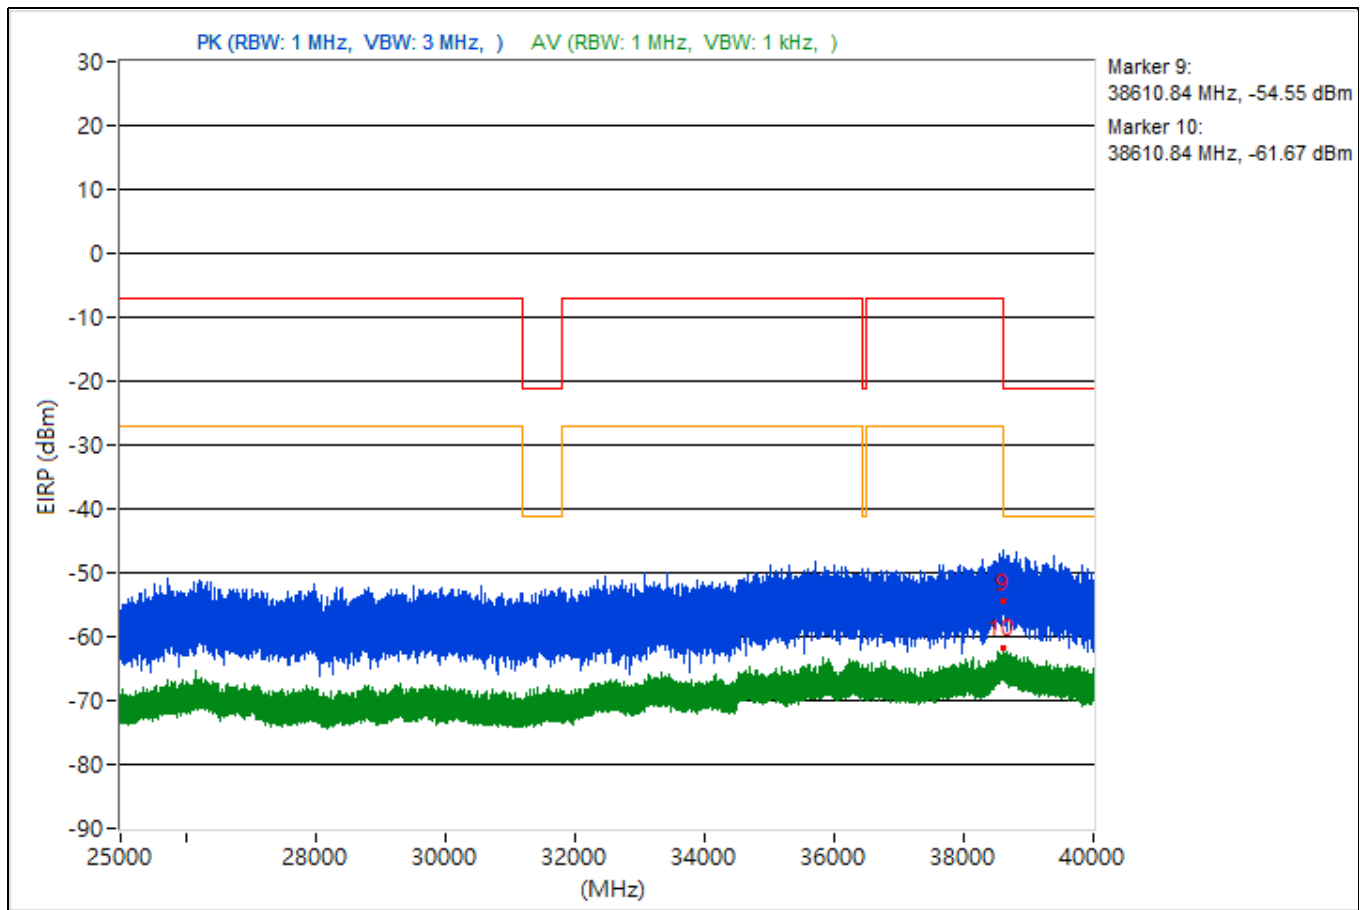


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.18	47.01 PK	74	-26.99	-53.17	4.92	-48.25
2	3809.18	35.66 AV	54	-18.34	-64.52	4.92	-59.6
3	8442.4	43.55 PK	74	-30.45	-56.63	4.92	-51.71
4	8442.4	34.4 AV	54	-19.6	-65.78	4.92	-60.86
5	19155.1	44.46 PK	74	-29.54	-55.72	4.92	-50.8
6	19155.1	36.88 AV	54	-17.12	-63.3	4.92	-58.38
7	23630.9	46.81 PK	74	-27.19	-53.37	4.92	-48.45
8	23630.9	37.14 AV	54	-16.86	-63.04	4.92	-58.12
9	38620	45.7 PK	74	-28.3	-54.48	4.92	-49.56
10	38620	33.17 AV	54	-20.83	-67.01	4.92	-62.09

Note: Margin value = Emission Level - Limit value

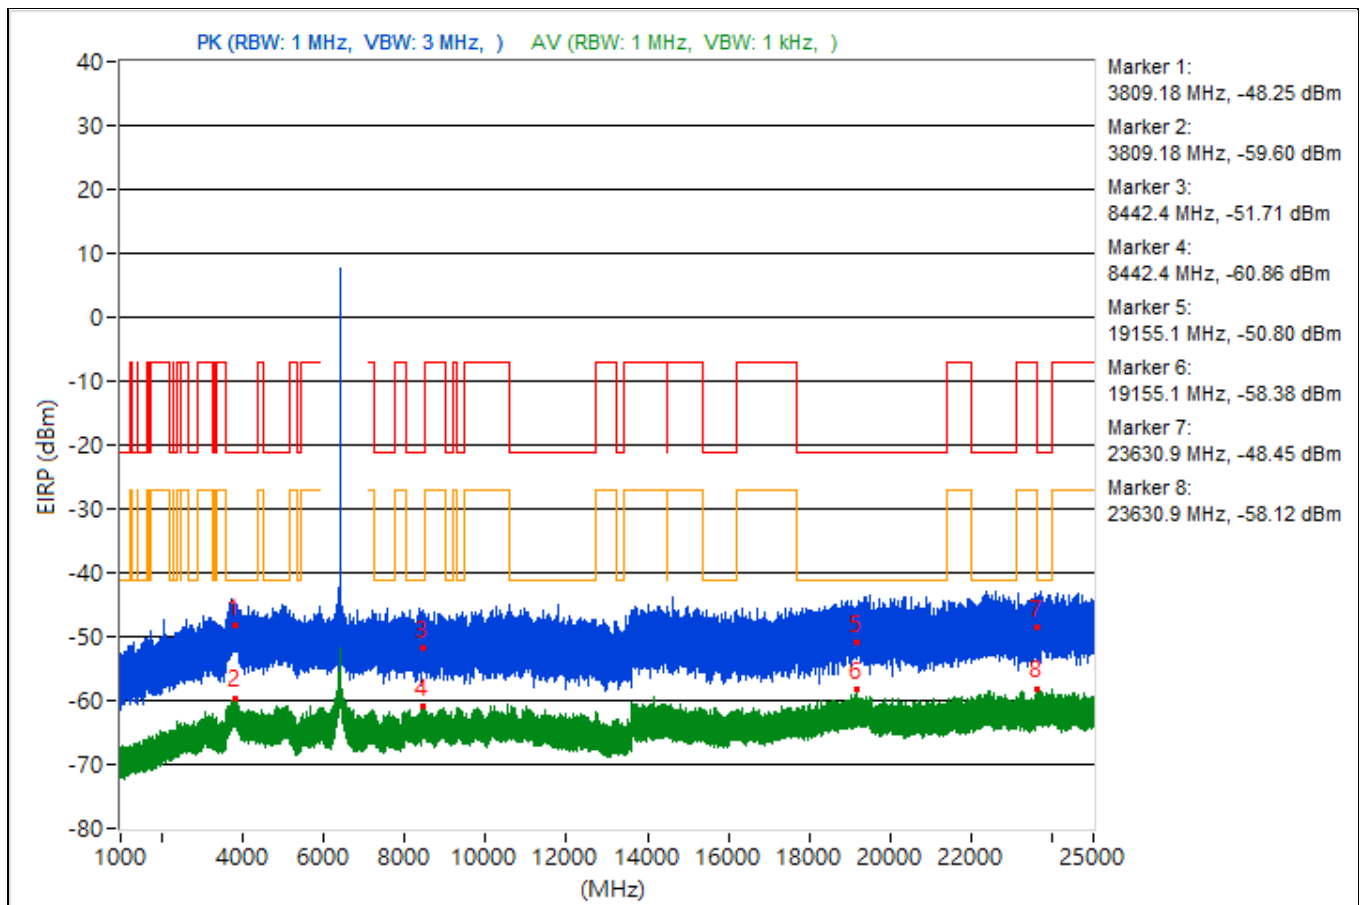


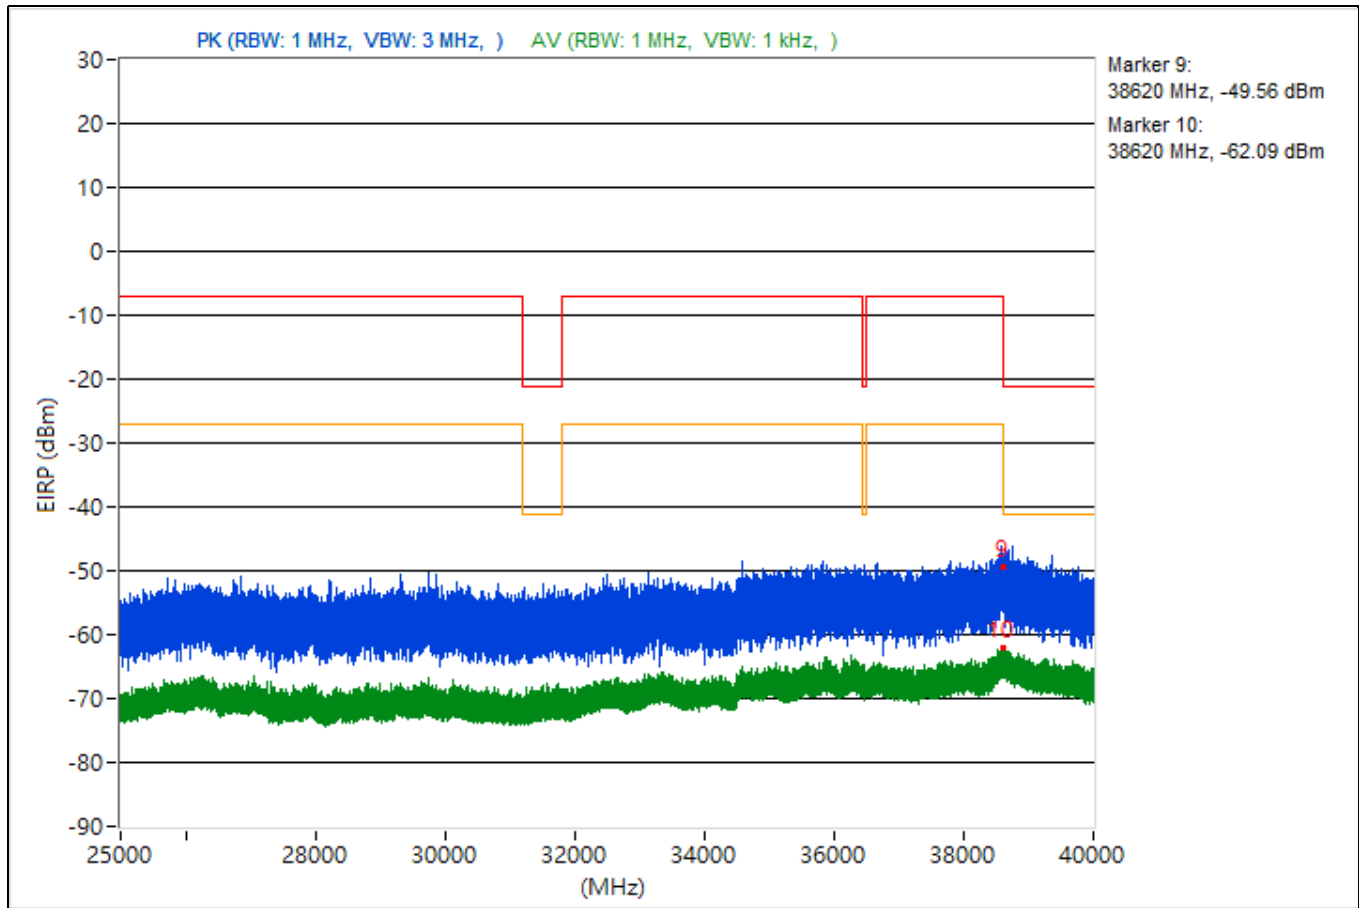


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3783.98	47.69 PK	74	-26.31	-52.49	4.92	-47.57
2	3783.98	35.4 AV	54	-18.6	-64.78	4.92	-59.86
3	10940.71	44.56 PK	74	-29.44	-55.62	4.92	-50.7
4	10940.71	34.42 AV	54	-19.58	-65.76	4.92	-60.84
5	19296.6	47.23 PK	74	-26.77	-52.95	4.92	-48.03
6	19296.6	35.97 AV	54	-18.03	-64.21	4.92	-59.29
7	22790.5	46.08 PK	74	-27.92	-54.1	4.92	-49.18
8	22790.5	36.59 AV	54	-17.41	-63.59	4.92	-58.67
9	38637.96	44.14 PK	74	-29.86	-56.04	4.92	-51.12
10	38637.96	33.62 AV	54	-20.38	-66.56	4.92	-61.64

Note: Margin value = Emission Level - Limit value

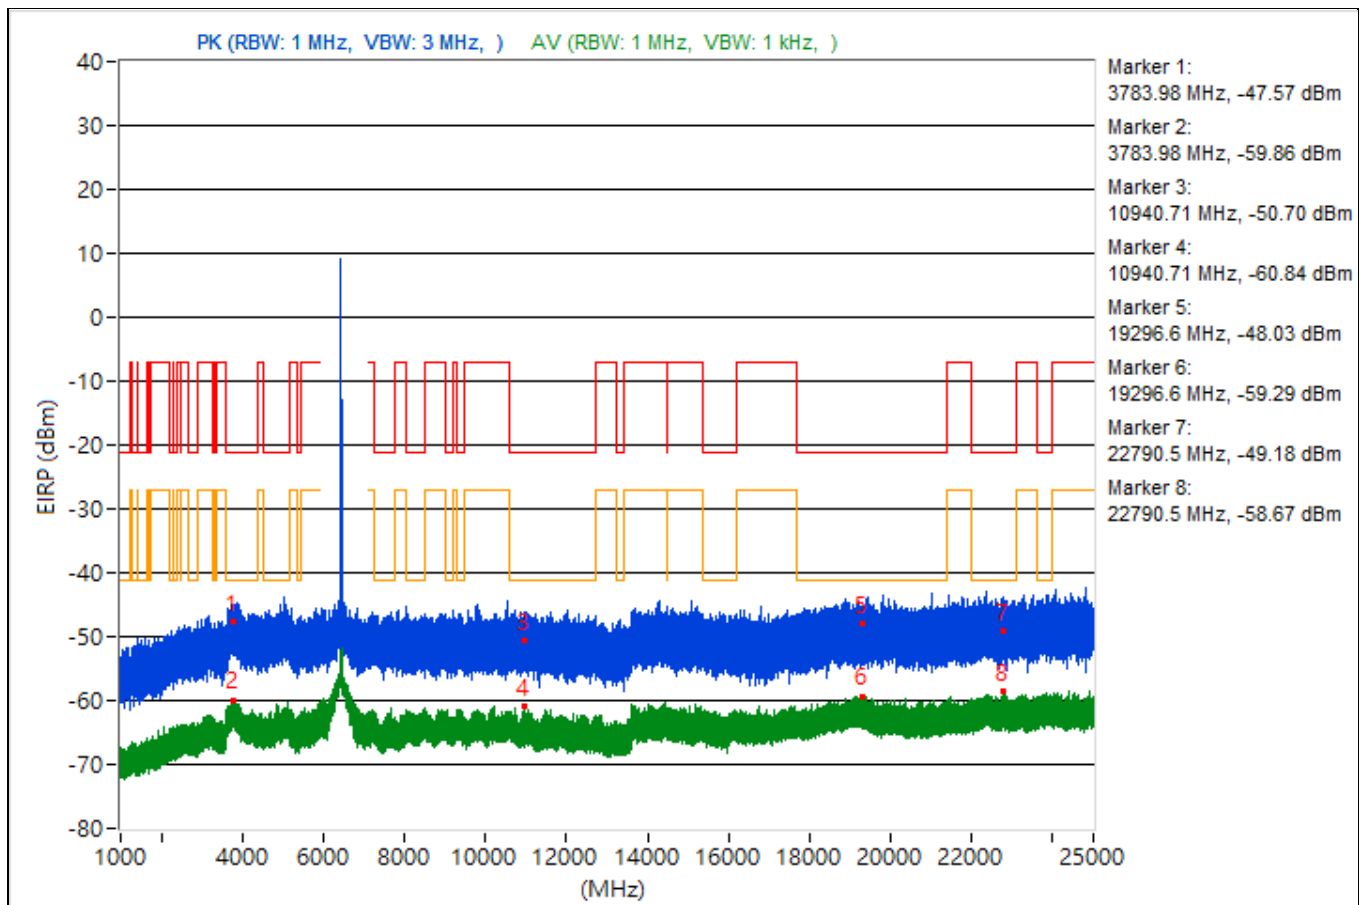


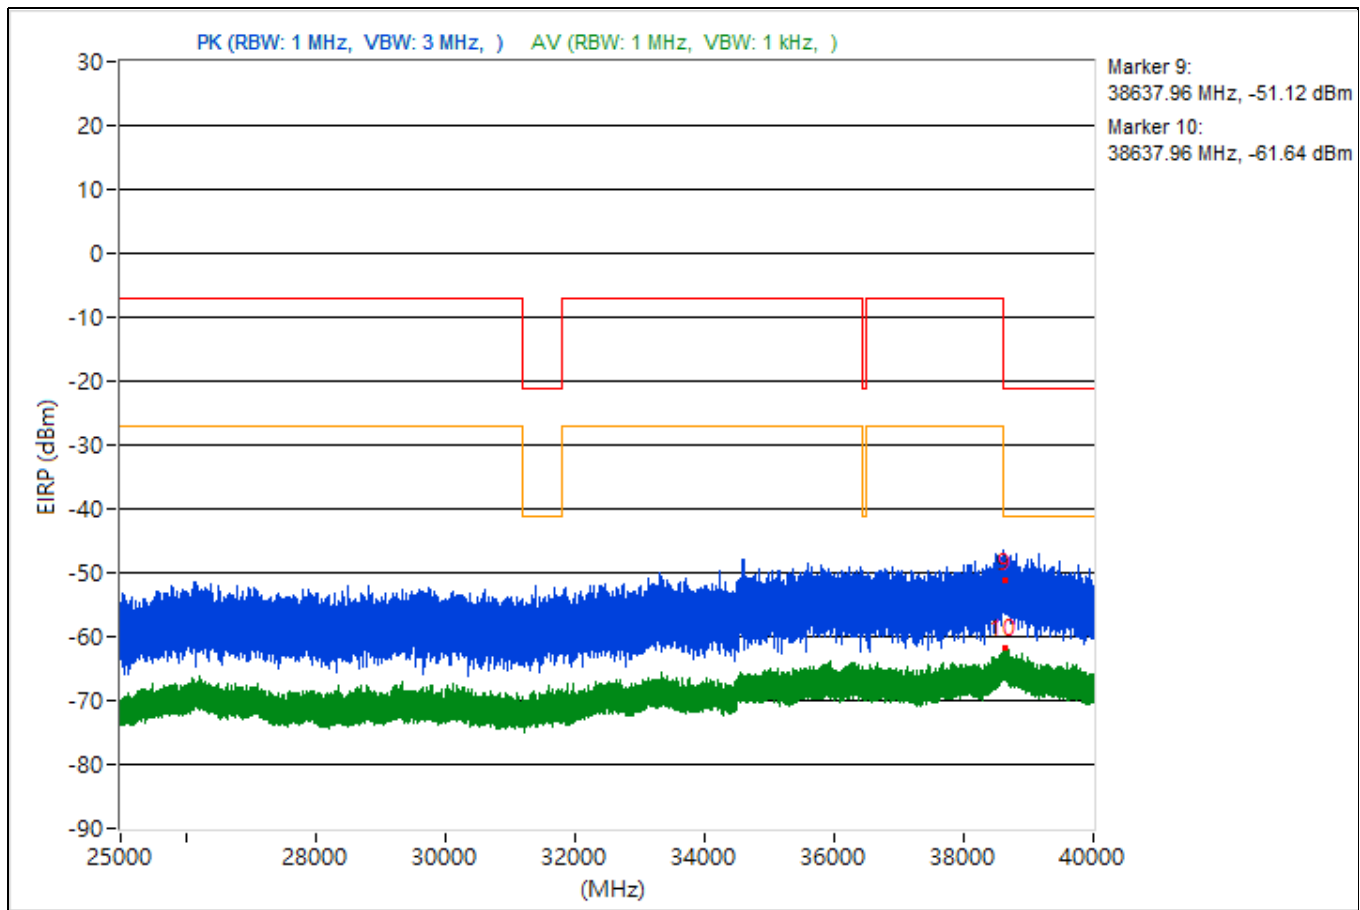


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.71	49.35 PK	74	-24.65	-50.83	4.92	-45.91
2	3815.71	35.22 AV	54	-18.78	-64.96	4.92	-60.04
3	15358.67	42.72 PK	74	-31.28	-57.46	4.92	-52.54
4	15358.67	35.11 AV	54	-18.89	-65.07	4.92	-60.15
5	19143.2	43.6 PK	74	-30.4	-56.58	4.92	-51.66
6	19143.2	35.92 AV	54	-18.08	-64.26	4.92	-59.34
7	23884.6	42.56 PK	74	-31.44	-57.62	4.92	-52.7
8	23884.6	36.74 AV	54	-17.26	-63.44	4.92	-58.52
9	38656.44	42.33 PK	74	-31.67	-57.85	4.92	-52.93
10	38656.44	32.77 AV	54	-21.23	-67.41	4.92	-62.49

Note: Margin value = Emission Level - Limit value

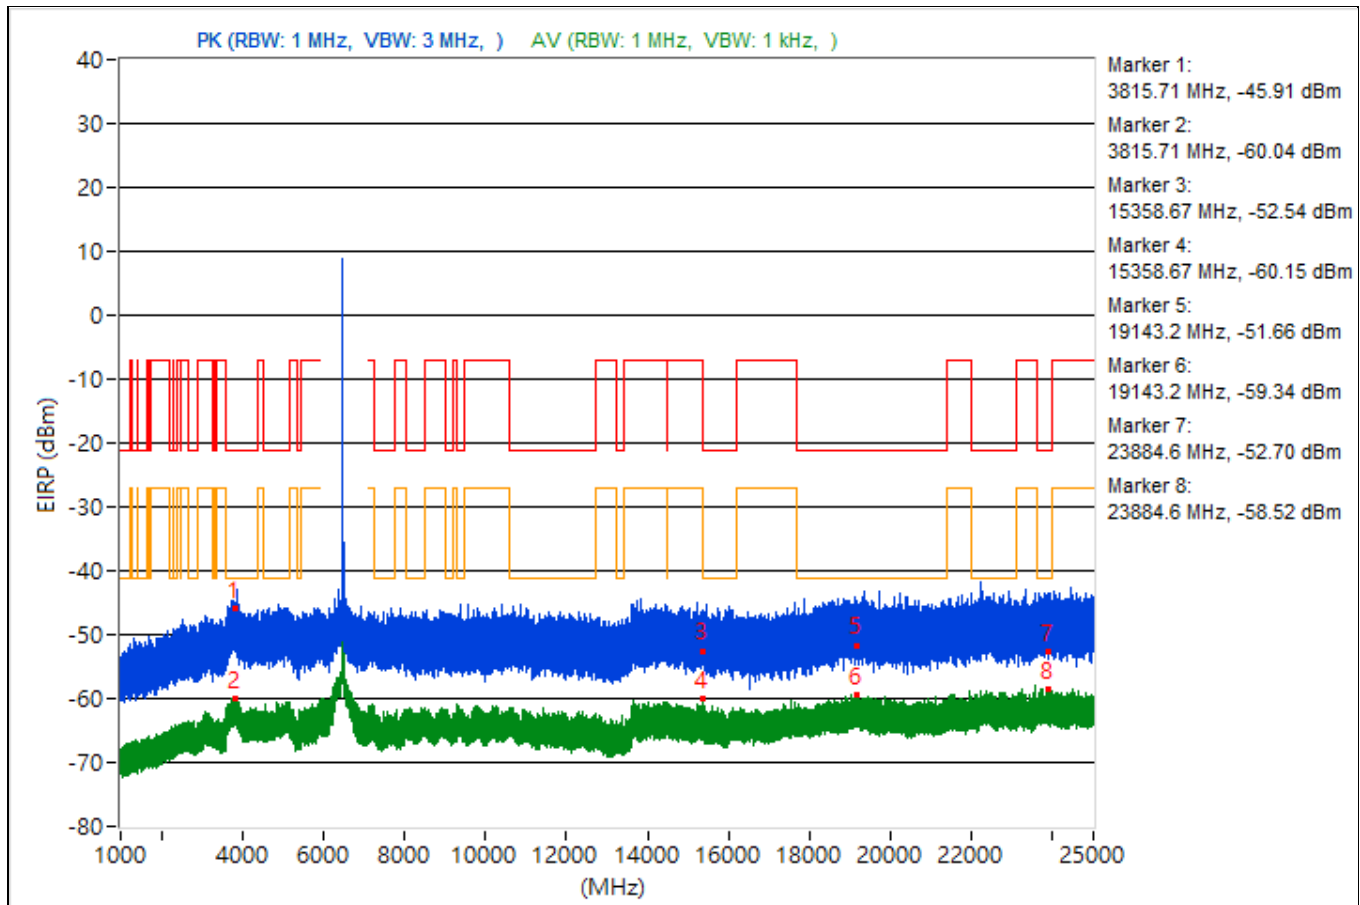


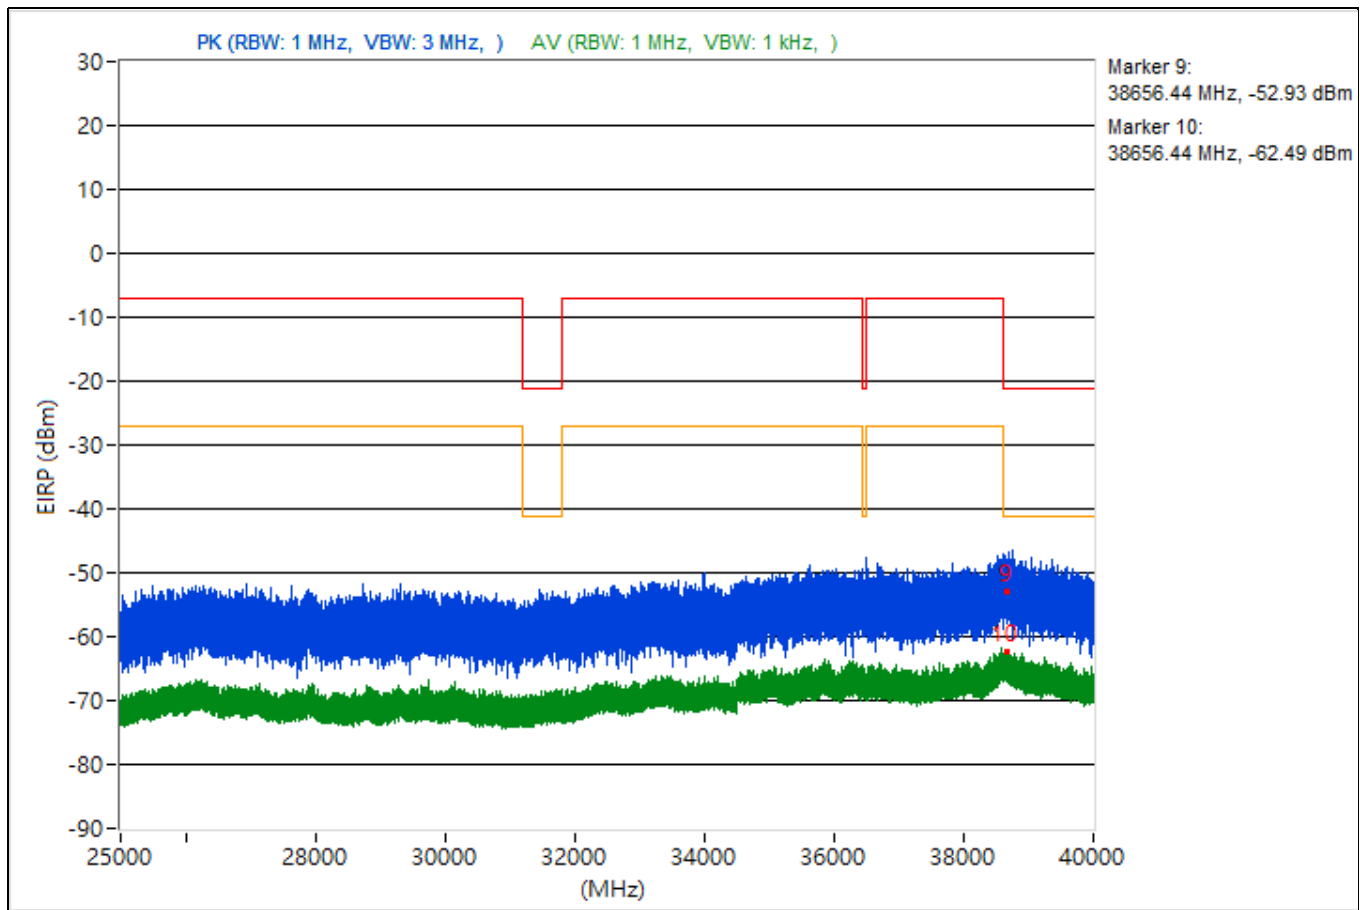


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.82	45 PK	74	-29	-55.18	4.92	-50.26
2	3776.82	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	14483.47	44.19 PK	74	-29.81	-55.99	4.92	-51.07
4	14483.47	34.74 AV	54	-19.26	-65.44	4.92	-60.52
5	19320.1	45.22 PK	74	-28.78	-54.96	4.92	-50.04
6	19320.1	35.85 AV	54	-18.15	-64.33	4.92	-59.41
7	23713.2	48.87 PK	74	-25.13	-51.31	4.92	-46.39
8	23713.2	36.88 AV	54	-17.12	-63.3	4.92	-58.38
9	38670.04	43.37 PK	74	-30.63	-56.81	4.92	-51.89
10	38670.04	32.85 AV	54	-21.15	-67.33	4.92	-62.41

Note: Margin value = Emission Level - Limit value

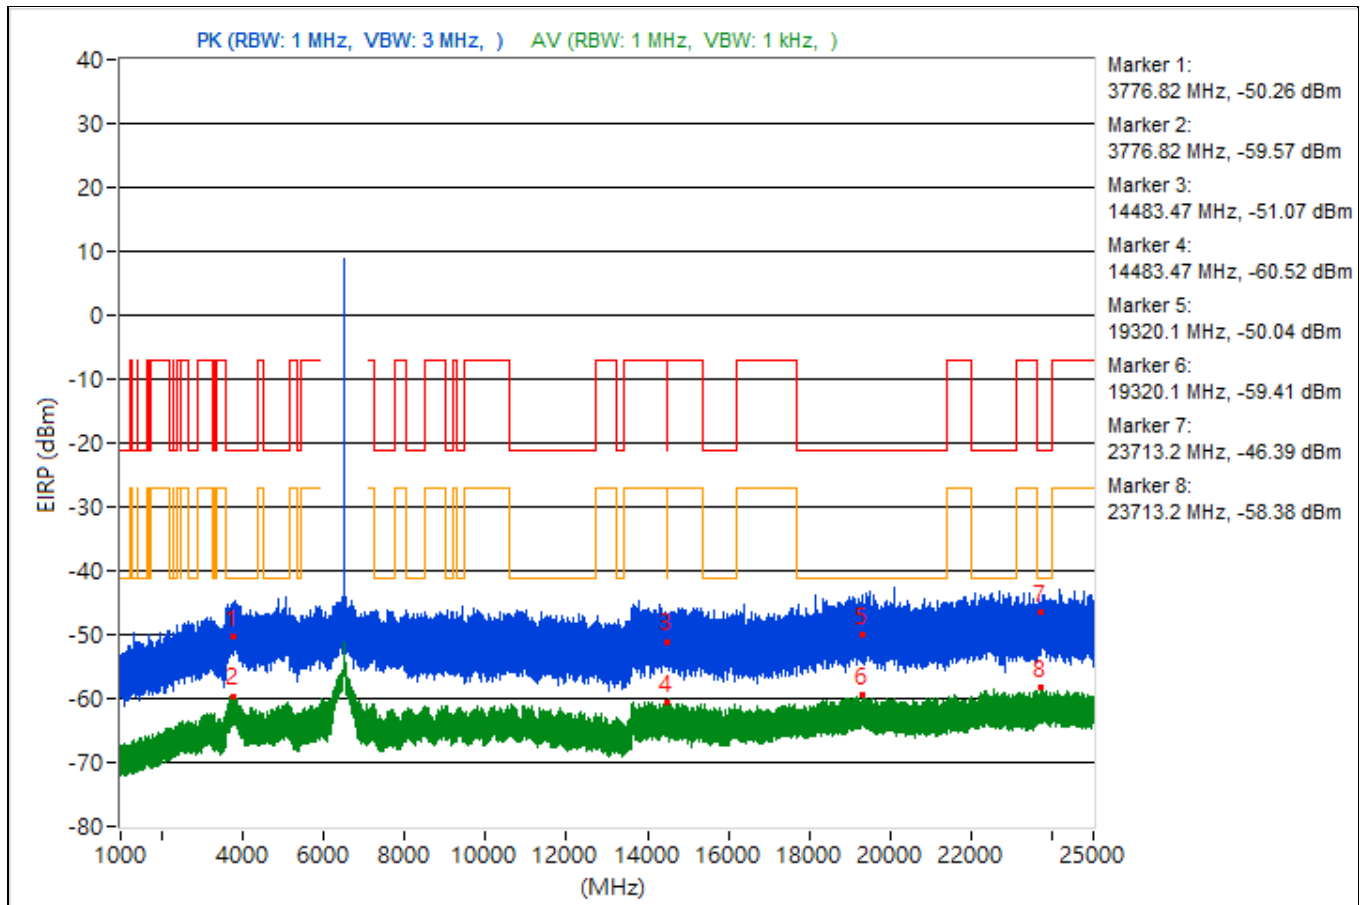


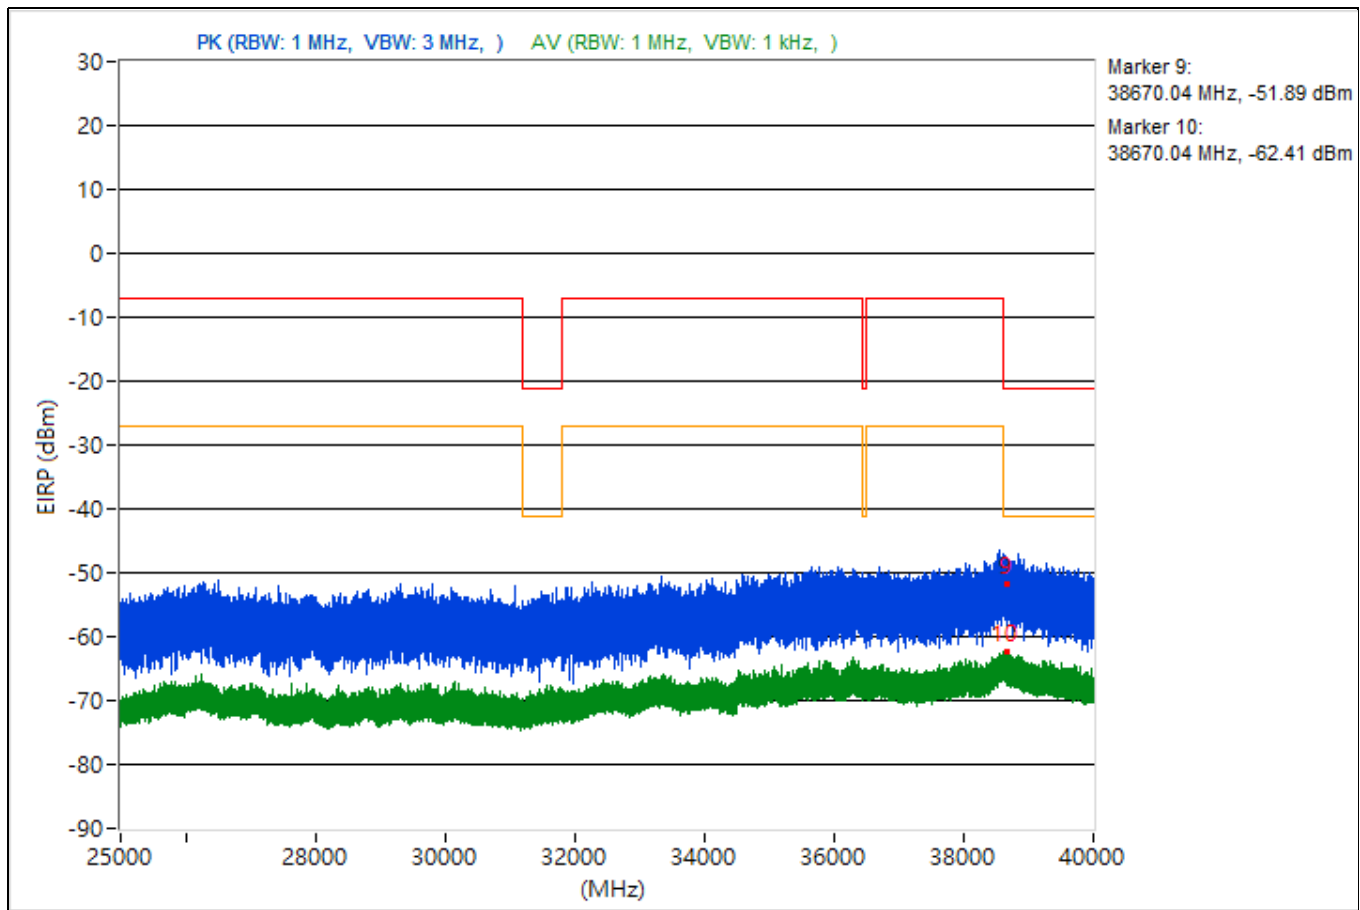


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3739.1	48.1 PK	74	-25.9	-52.08	4.92	-47.16
2	3739.1	35.91 AV	54	-18.09	-64.27	4.92	-59.35
3	14491.82	46.29 PK	74	-27.71	-53.89	4.92	-48.97
4	14491.82	35.26 AV	54	-18.74	-64.92	4.92	-60
5	19247.5	45.42 PK	74	-28.58	-54.76	4.92	-49.84
6	19247.5	36.32 AV	54	-17.68	-63.86	4.92	-58.94
7	22384.8	48.23 PK	74	-25.77	-51.95	4.92	-47.03
8	22384.8	36.8 AV	54	-17.2	-63.38	4.92	-58.46
9	38640	45.16 PK	74	-28.84	-55.02	4.92	-50.1
10	38640	33.72 AV	54	-20.28	-66.46	4.92	-61.54

Note: Margin value = Emission Level - Limit value

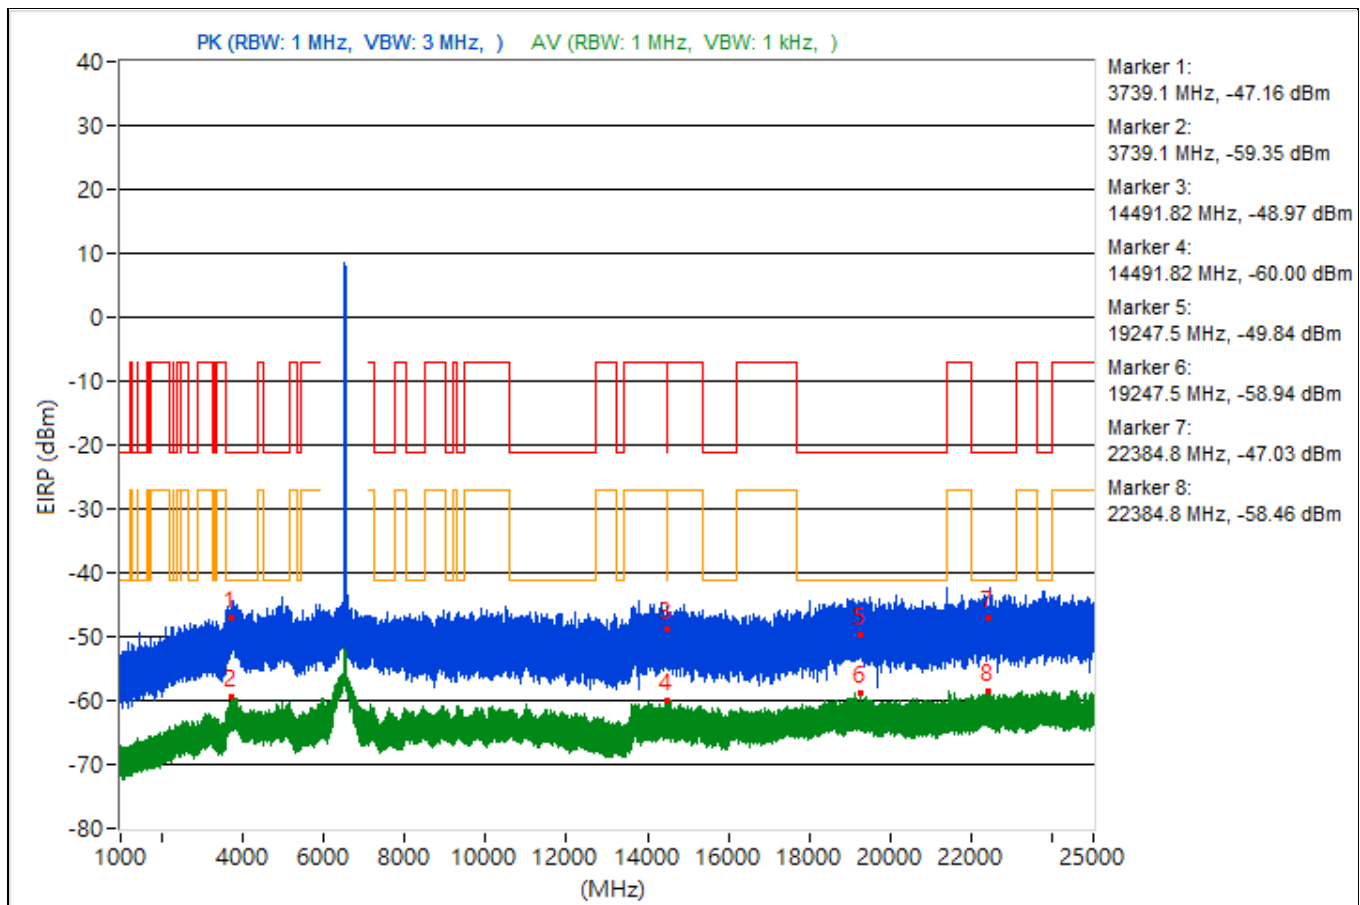


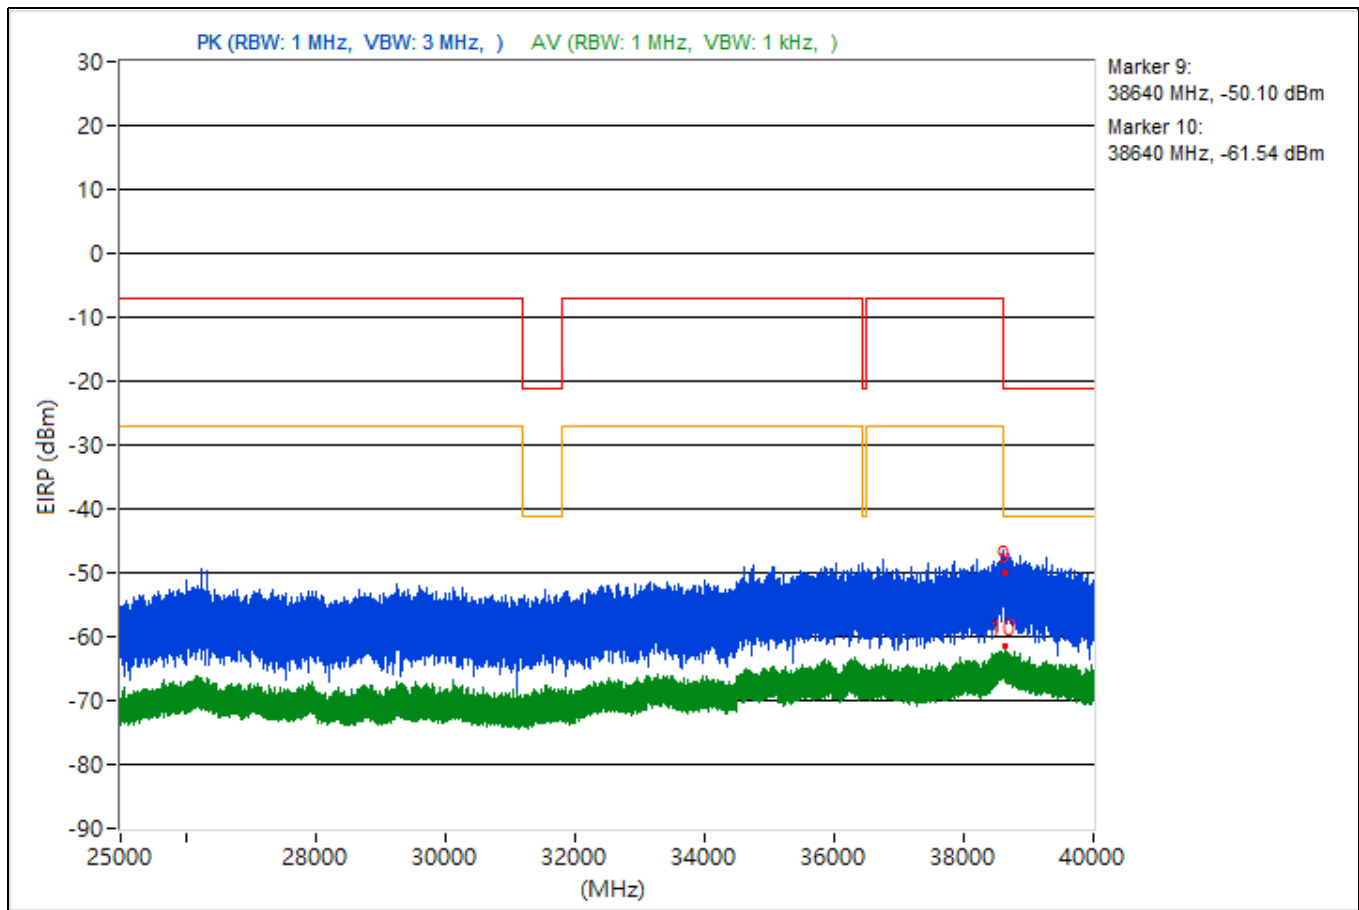


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.88	46.21 PK	74	-27.79	-53.97	4.92	-49.05
2	3809.88	36.09 AV	54	-17.91	-64.09	4.92	-59.17
3	14470.04	45.58 PK	74	-28.42	-54.6	4.92	-49.68
4	14470.04	35.45 AV	54	-18.55	-64.73	4.92	-59.81
5	19105.2	44.07 PK	74	-29.93	-56.11	4.92	-51.19
6	19105.2	36.27 AV	54	-17.73	-63.91	4.92	-58.99
7	23751.1	46.87 PK	74	-27.13	-53.31	4.92	-48.39
8	23751.1	36.94 AV	54	-17.06	-63.24	4.92	-58.32
9	38626.22	44.27 PK	74	-29.73	-55.91	4.92	-50.99
10	38626.22	33.46 AV	54	-20.54	-66.72	4.92	-61.8

Note: Margin value = Emission Level - Limit value

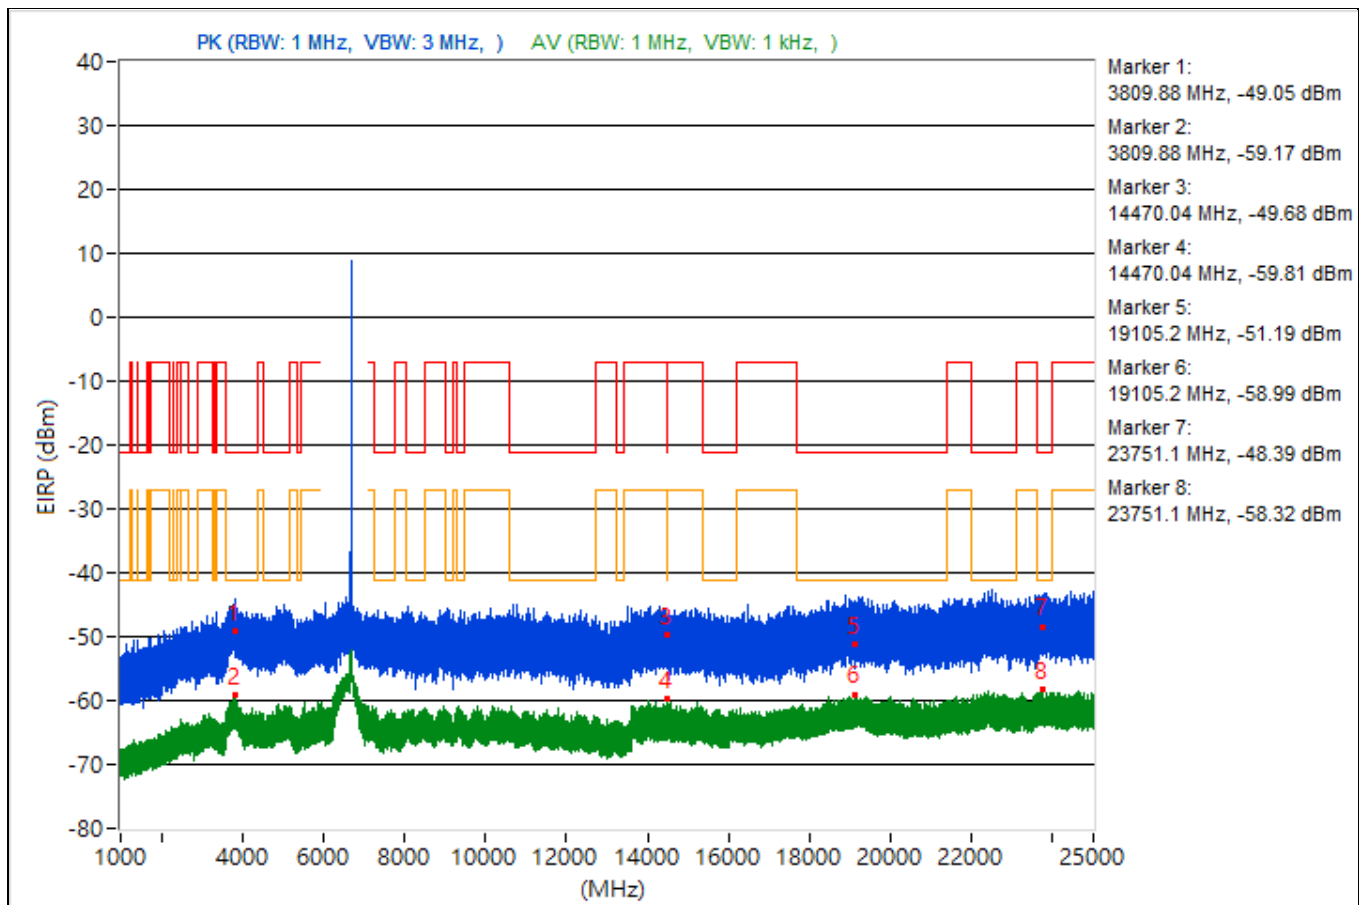


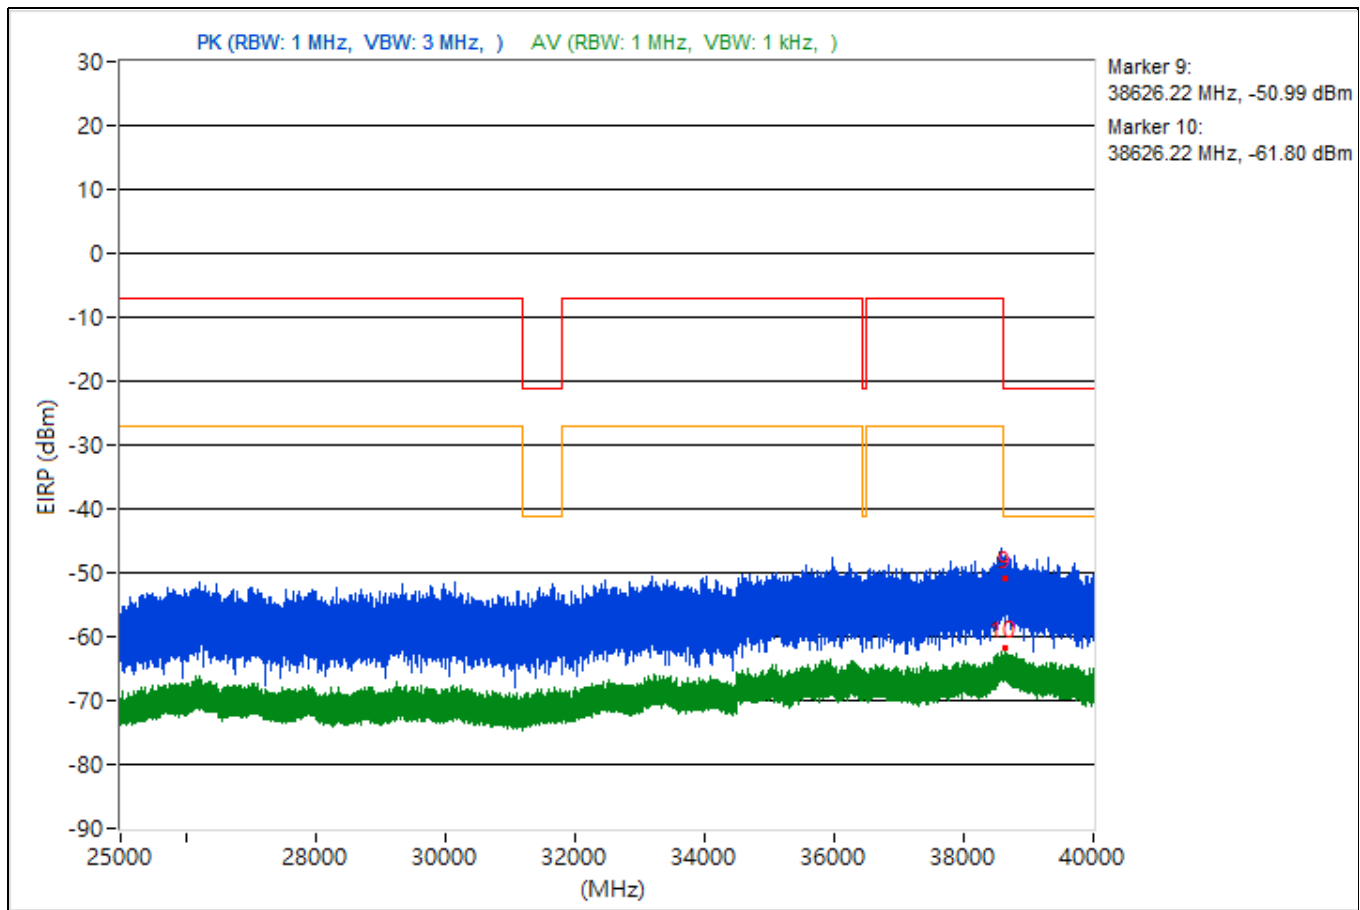


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3755.98	46.45 PK	74	-27.55	-53.73	4.92	-48.81
2	3755.98	34.94 AV	54	-19.06	-65.24	4.92	-60.32
3	14499.29	44.13 PK	74	-29.87	-56.05	4.92	-51.13
4	14499.29	35.05 AV	54	-18.95	-65.13	4.92	-60.21
5	19482.8	44.11 PK	74	-29.89	-56.07	4.92	-51.15
6	19482.8	36.43 AV	54	-17.57	-63.75	4.92	-58.83
7	23688.6	53.95 PK	74	-20.05	-46.23	4.92	-41.31
8	23688.6	36.95 AV	54	-17.05	-63.23	4.92	-58.31
9	38606.04	47.52 PK	74	-26.48	-52.66	4.92	-47.74
10	38606.04	33.63 AV	54	-20.37	-66.55	4.92	-61.63

Note: Margin value = Emission Level - Limit value

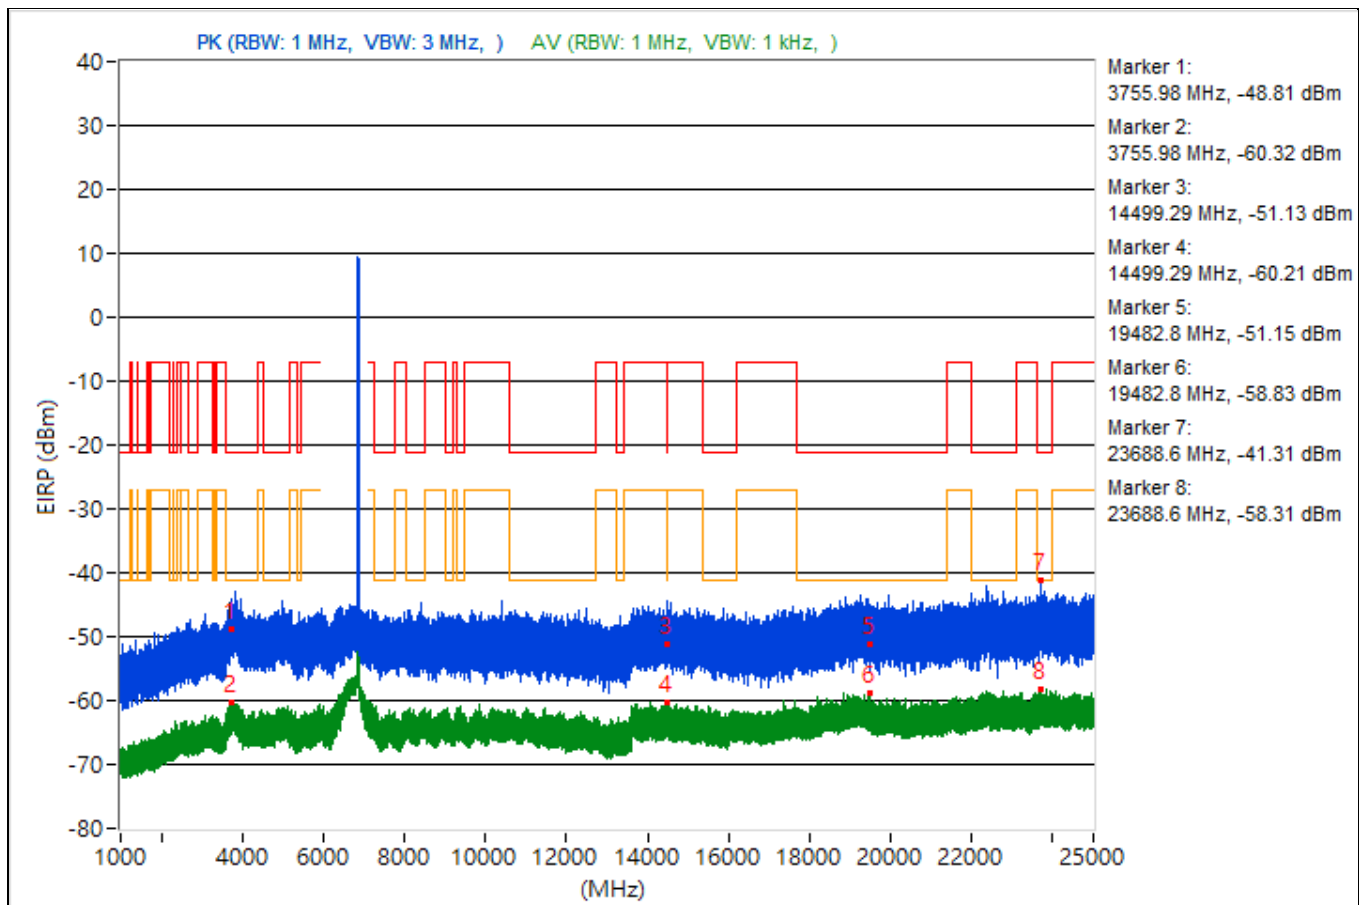


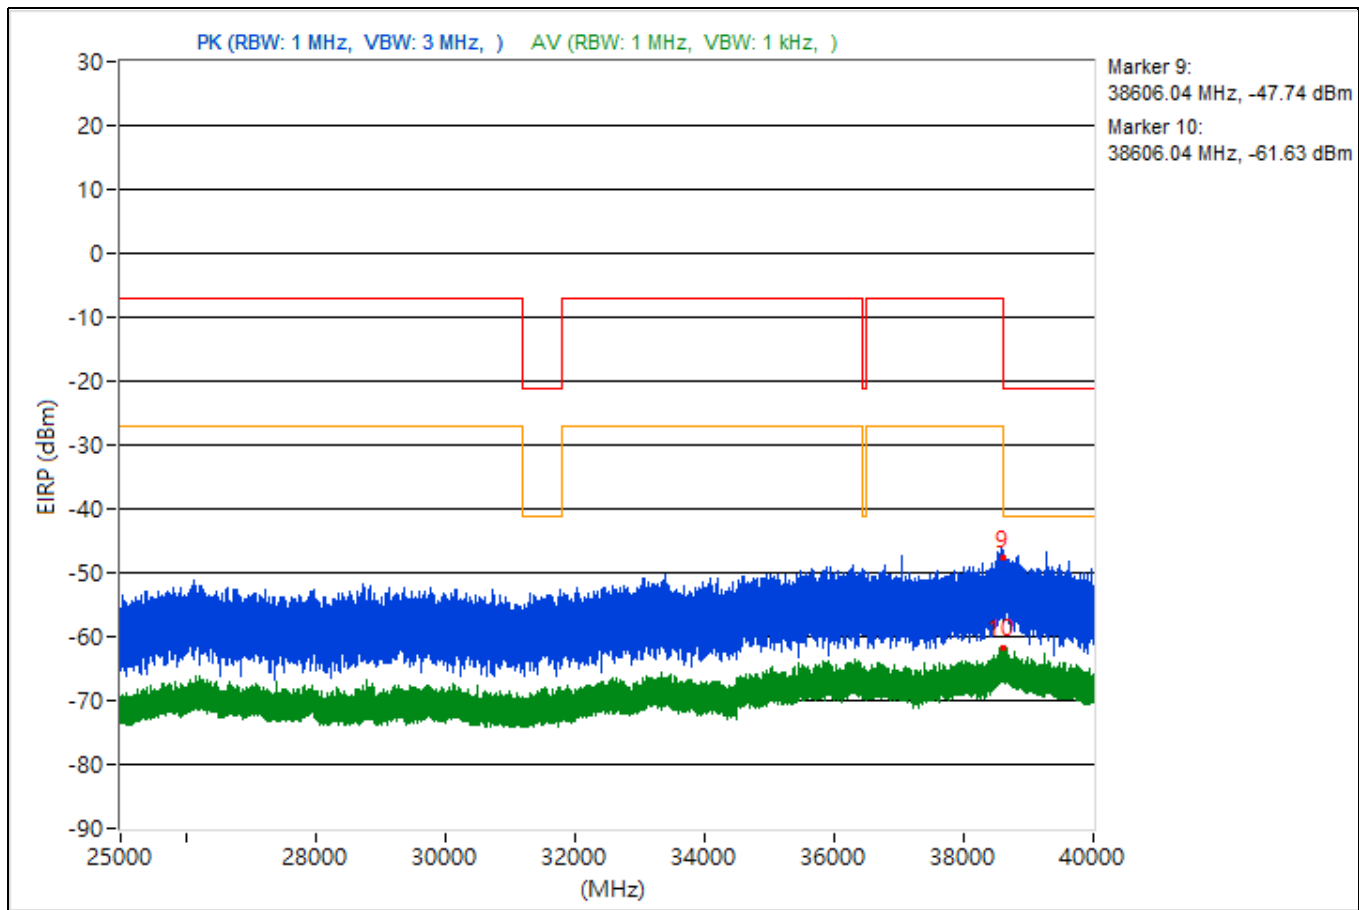


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.21	47.52 PK	74	-26.48	-52.66	4.92	-47.74
2	3812.21	35.73 AV	54	-18.27	-64.45	4.92	-59.53
3	14483.38	46.12 PK	74	-27.88	-54.06	4.92	-49.14
4	14483.38	34.46 AV	54	-19.54	-65.72	4.92	-60.8
5	19168.8	46.09 PK	74	-27.91	-54.09	4.92	-49.17
6	19168.8	36.17 AV	54	-17.83	-64.01	4.92	-59.09
7	22805.7	48.69 PK	74	-25.31	-51.49	4.92	-46.57
8	22805.7	36.58 AV	54	-17.42	-63.6	4.92	-58.68
9	38644.89	41.58 PK	74	-32.42	-58.6	4.92	-53.68
10	38644.89	33.05 AV	54	-20.95	-67.13	4.92	-62.21

Note: Margin value = Emission Level - Limit value

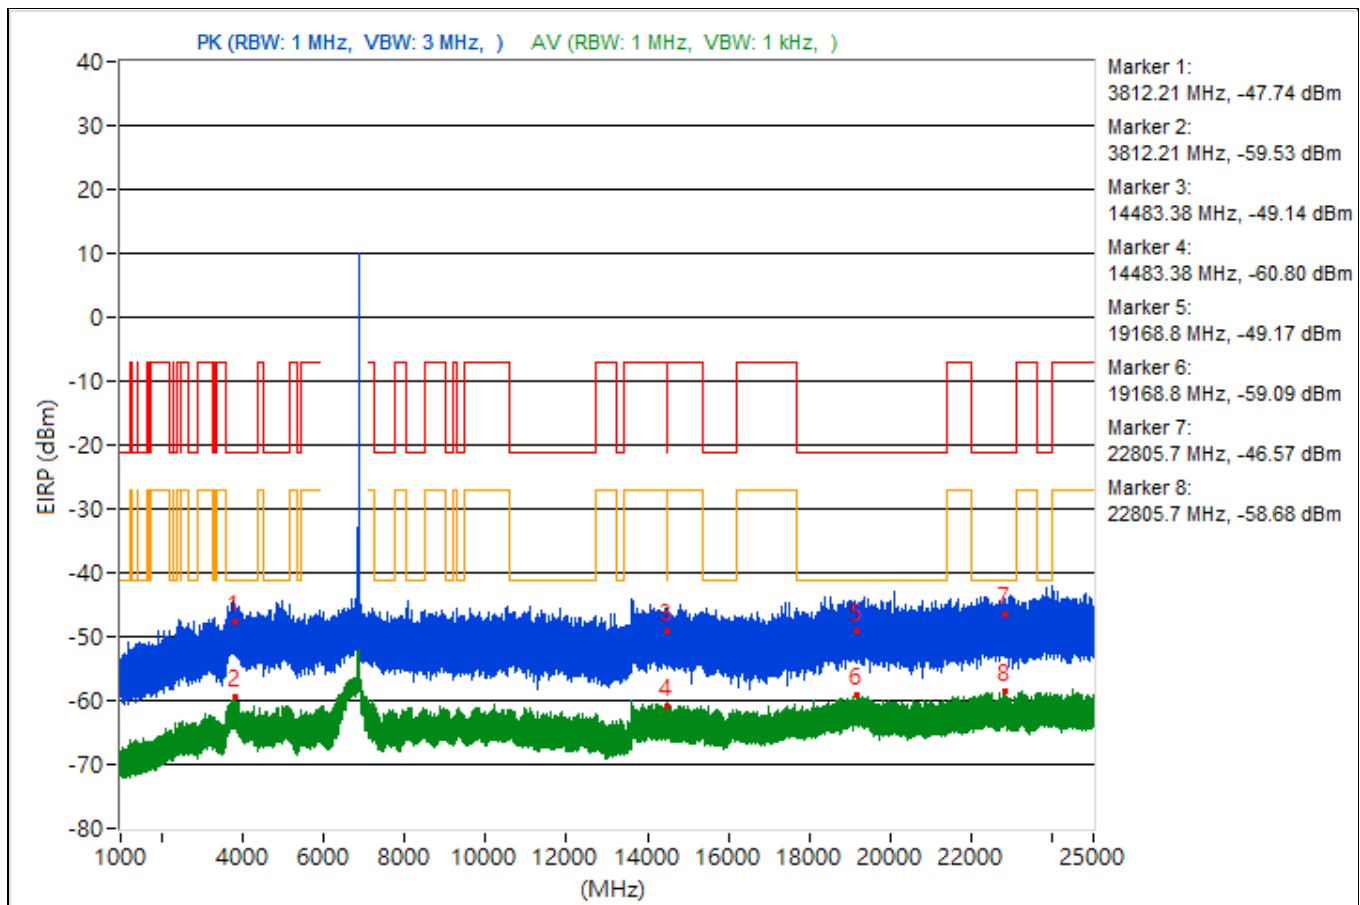


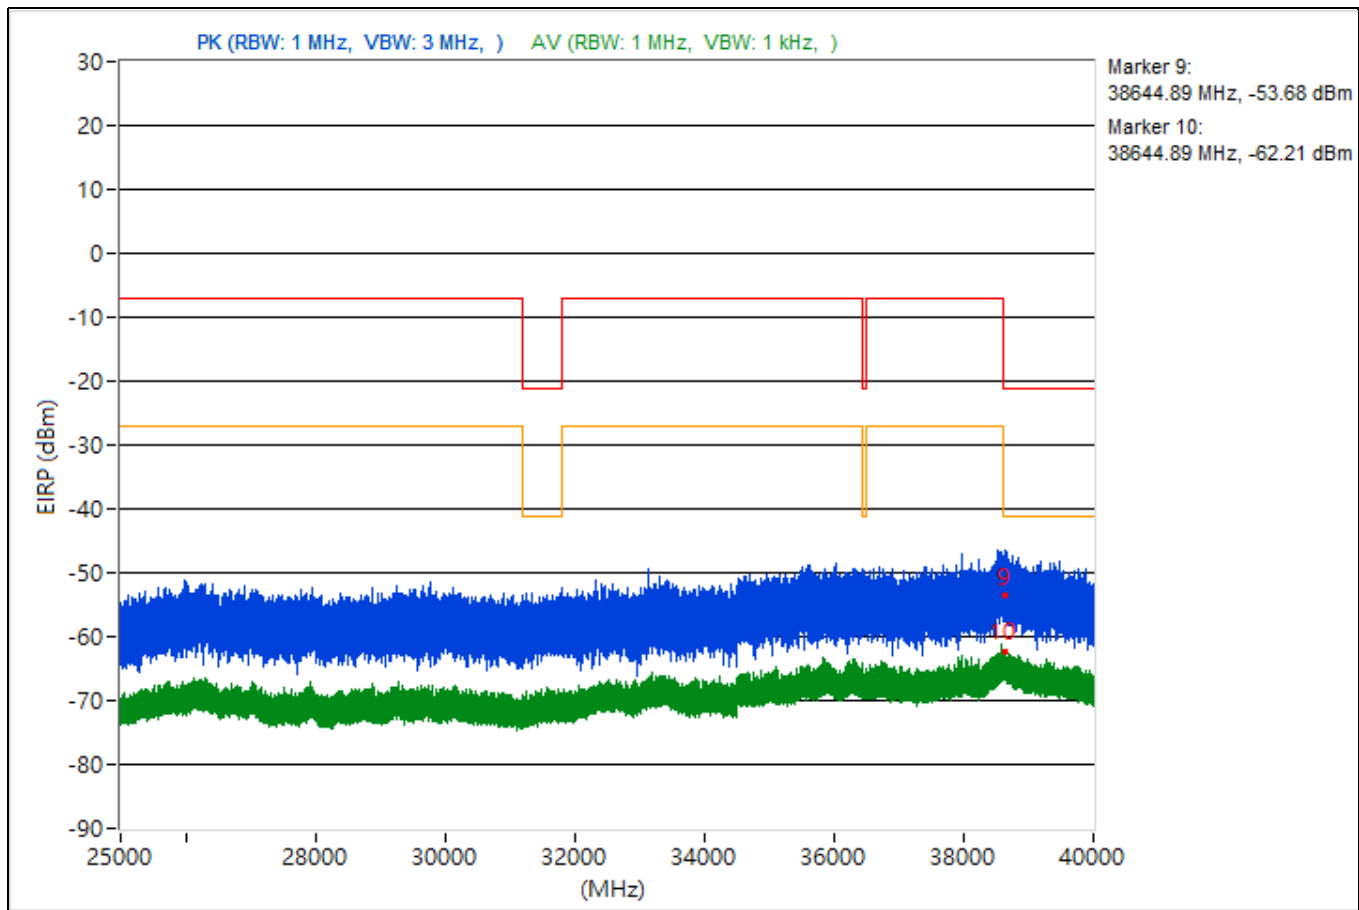


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3783.74	47.31 PK	74	-26.69	-52.87	4.92	-47.95
2	3783.74	36.3 AV	54	-17.7	-63.88	4.92	-58.96
3	7270.68	45.11 PK	74	-28.89	-55.07	4.92	-50.15
4	7270.68	35.03 AV	54	-18.97	-65.15	4.92	-60.23
5	19069.4	46.01 PK	74	-27.99	-54.17	4.92	-49.25
6	19069.4	36.16 AV	54	-17.84	-64.02	4.92	-59.1
7	23632.3	47.7 PK	74	-26.3	-52.48	4.92	-47.56
8	23632.3	37.12 AV	54	-16.88	-63.06	4.92	-58.14
9	38623.47	43.83 PK	74	-30.17	-56.35	4.92	-51.43
10	38623.47	33.17 AV	54	-20.83	-67.01	4.92	-62.09

Note: Margin value = Emission Level - Limit value

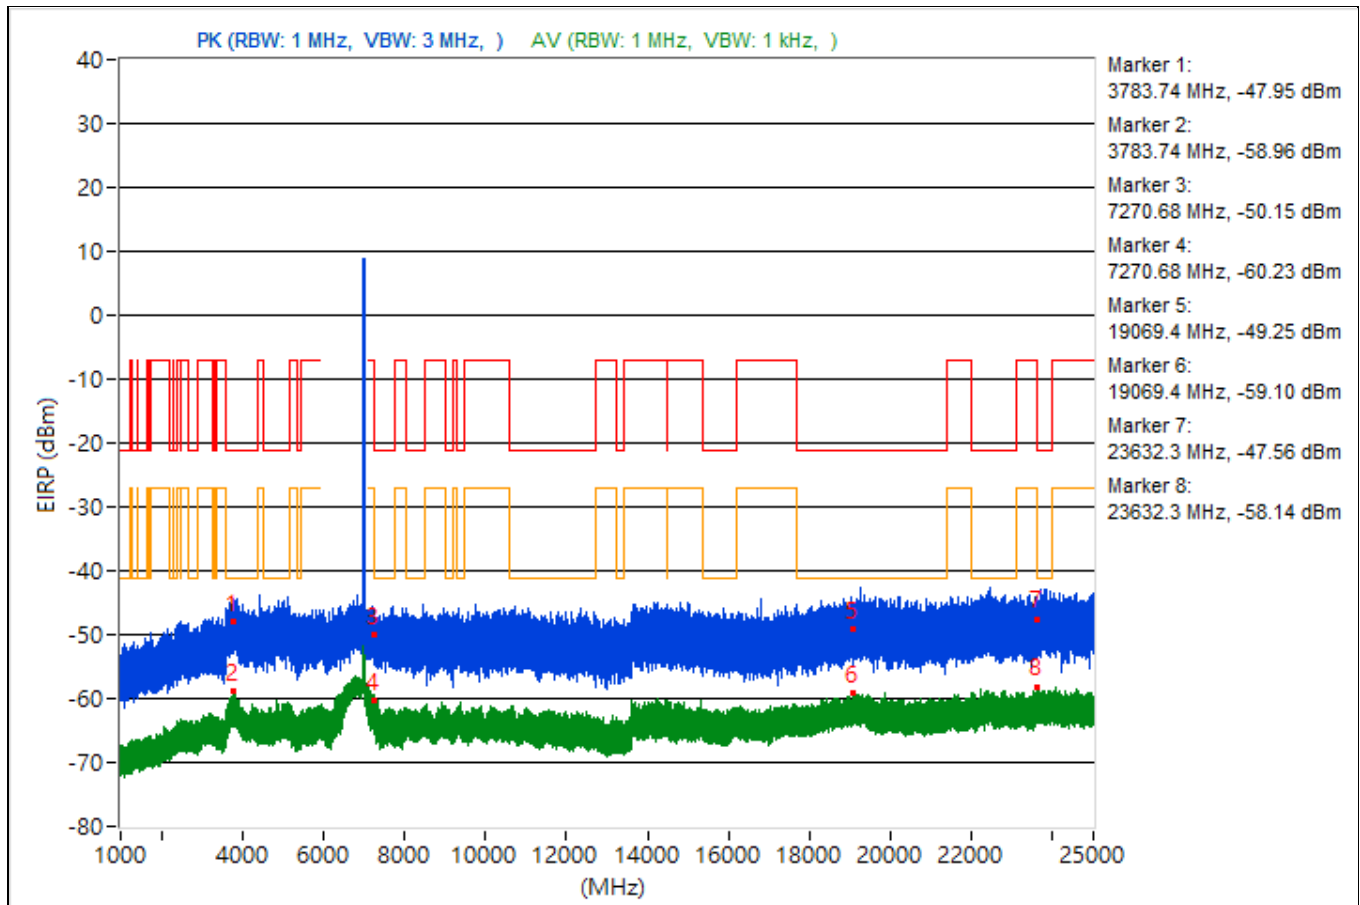


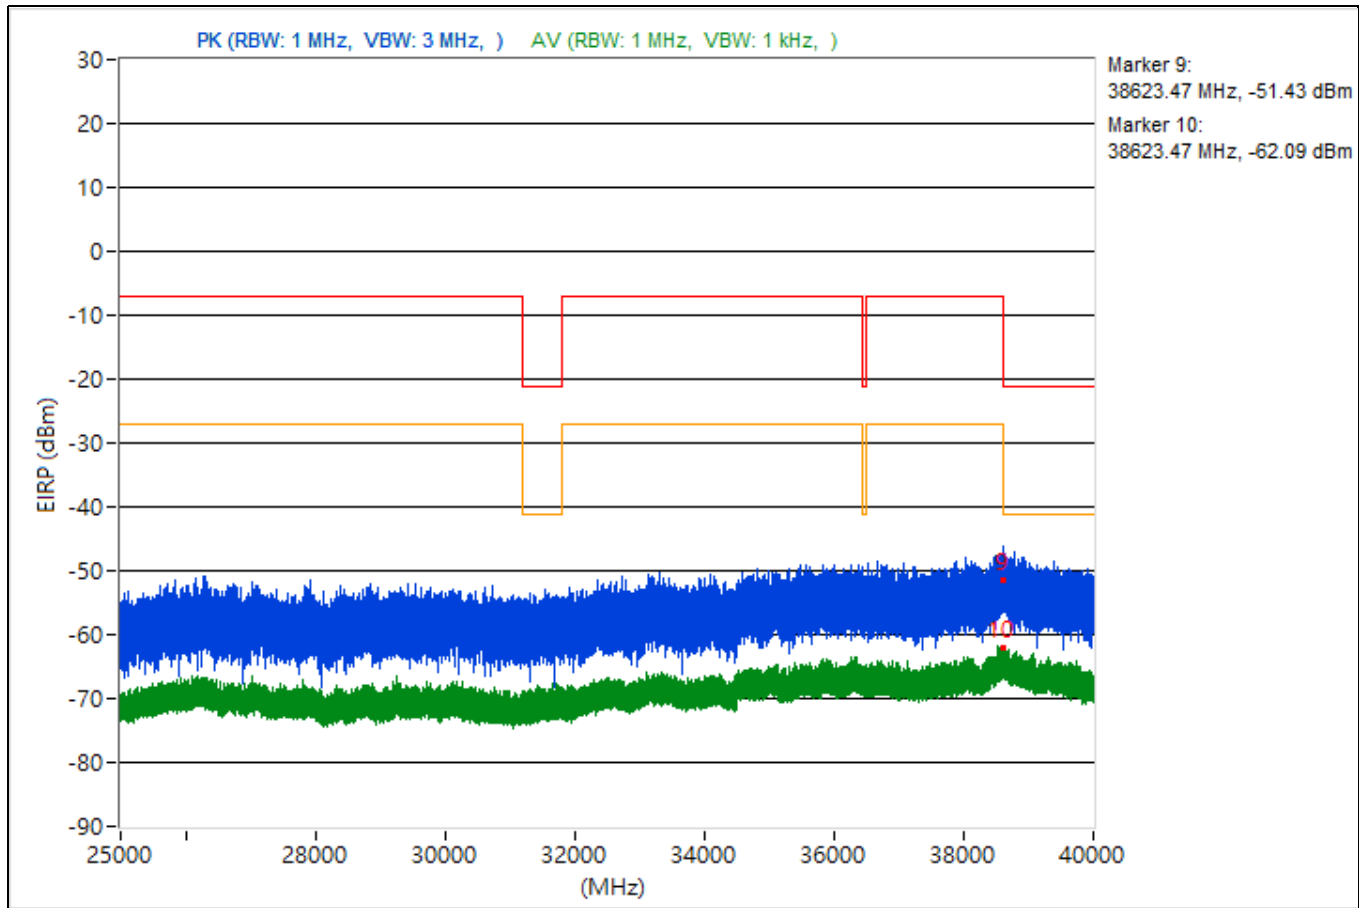


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.23	44.66 PK	74	-29.34	-55.52	4.92	-50.6
2	3821.23	35.88 AV	54	-18.12	-64.3	4.92	-59.38
3	7252.17	45.64 PK	74	-28.36	-54.54	4.92	-49.62
4	7252.17	36.31 AV	54	-17.69	-63.87	4.92	-58.95
5	19167.6	47.66 PK	74	-26.34	-52.52	4.92	-47.6
6	19167.6	36.07 AV	54	-17.93	-64.11	4.92	-59.19
7	22908.8	48.56 PK	74	-25.44	-51.62	4.92	-46.7
8	22908.8	36.56 AV	54	-17.44	-63.62	4.92	-58.7
9	38628.98	43.03 PK	74	-30.97	-57.15	4.92	-52.23
10	38628.98	33.74 AV	54	-20.26	-66.44	4.92	-61.52

Note: Margin value = Emission Level - Limit value

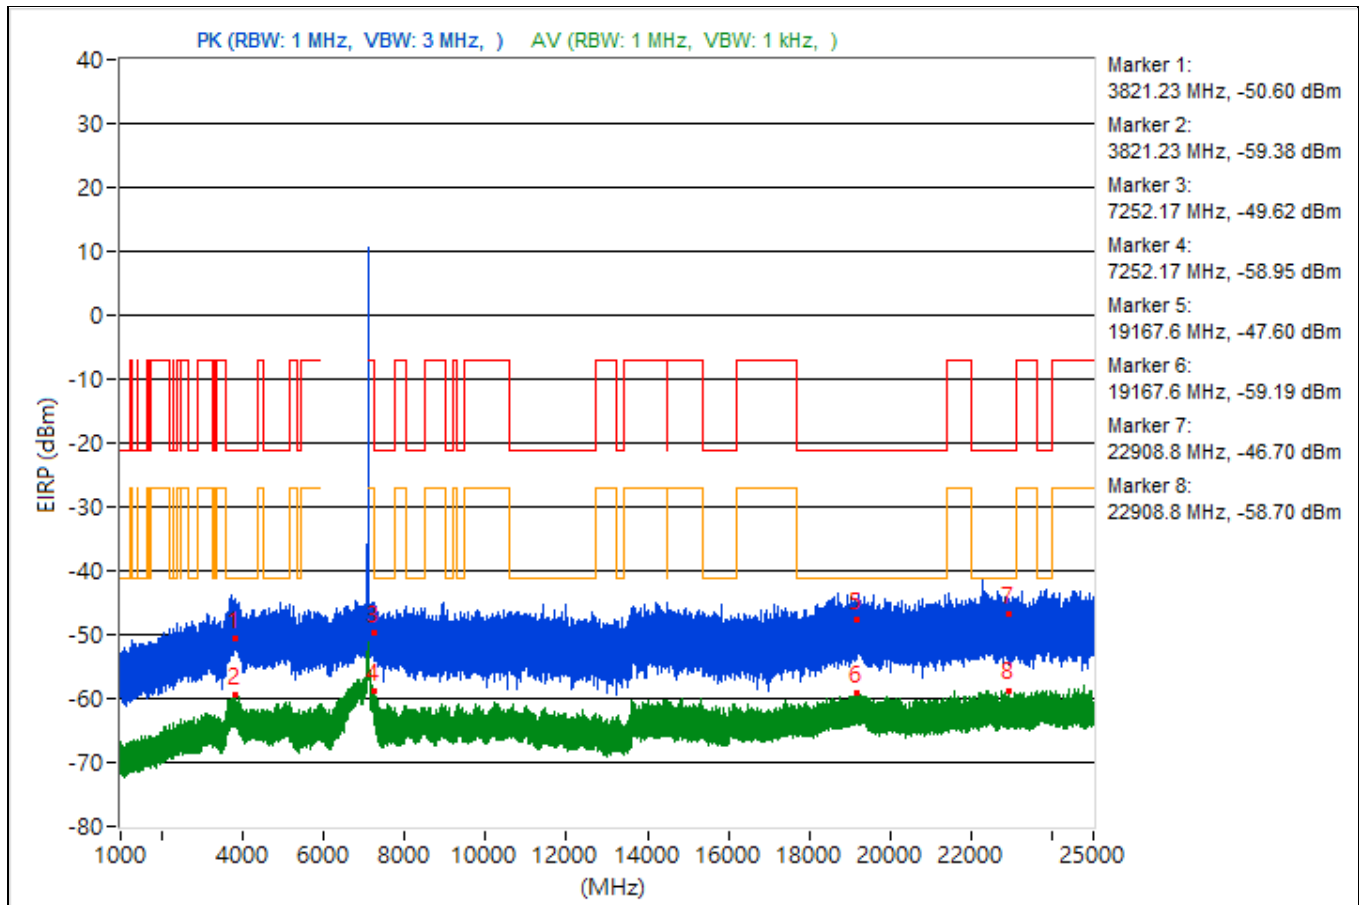


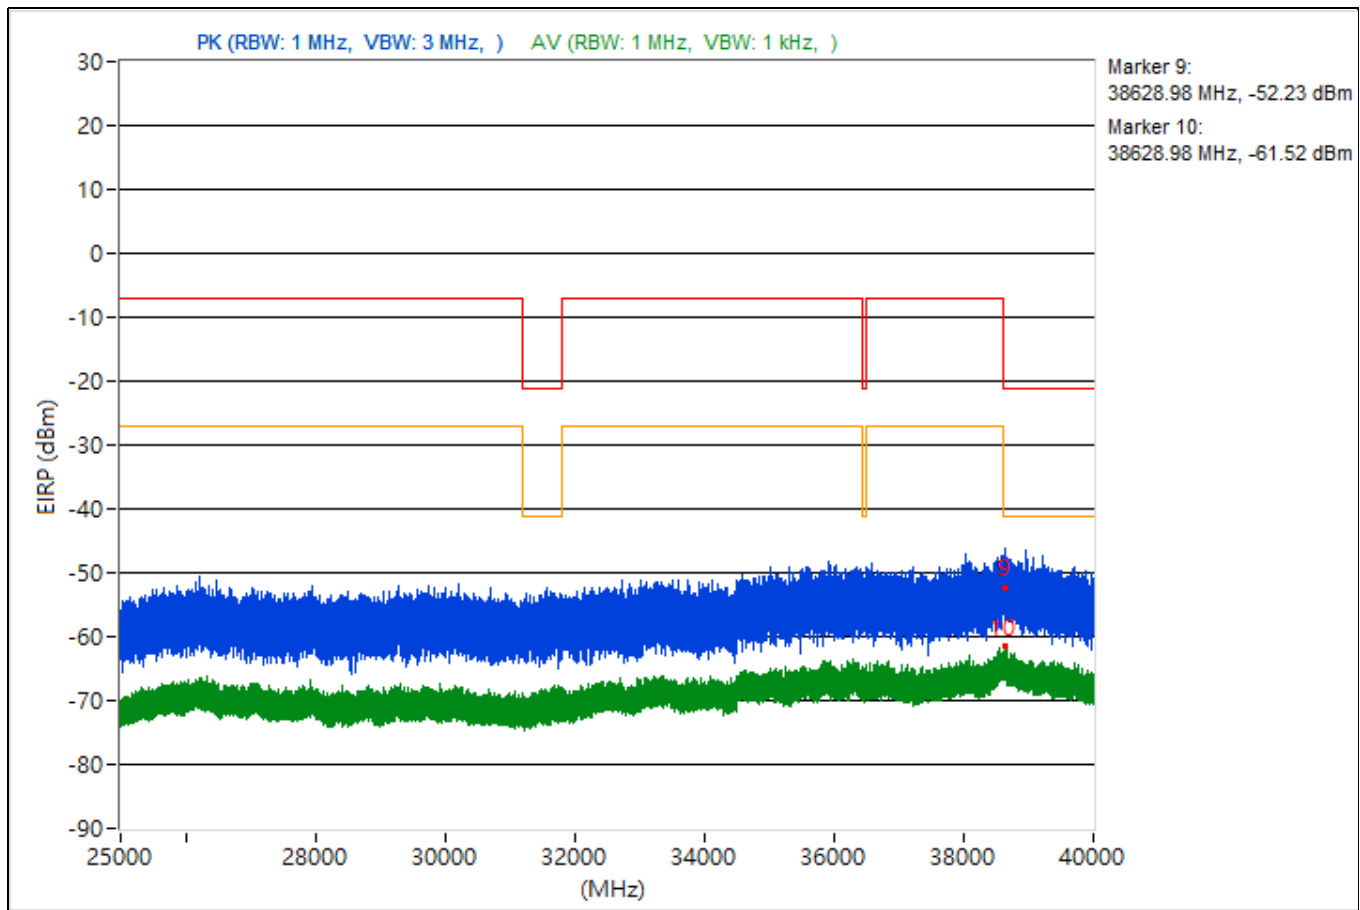


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.94	44.62 PK	74	-29.38	-55.56	4.92	-50.64
2	3822.94	35.6 AV	54	-18.4	-64.58	4.92	-59.66
3	14478.31	47.72 PK	74	-26.28	-52.46	4.92	-47.54
4	14478.31	34.74 AV	54	-19.26	-65.44	4.92	-60.52
5	19557.7	46.07 PK	74	-27.93	-54.11	4.92	-49.19
6	19557.7	36.32 AV	54	-17.68	-63.86	4.92	-58.94
7	23639.9	46.09 PK	74	-27.91	-54.09	4.92	-49.17
8	23639.9	37.15 AV	54	-16.85	-63.03	4.92	-58.11
9	38604.62	38.81 PK	74	-35.19	-61.37	4.92	-56.45
10	38604.62	33.81 AV	54	-20.19	-66.37	4.92	-61.45

Note: Margin value = Emission Level - Limit value

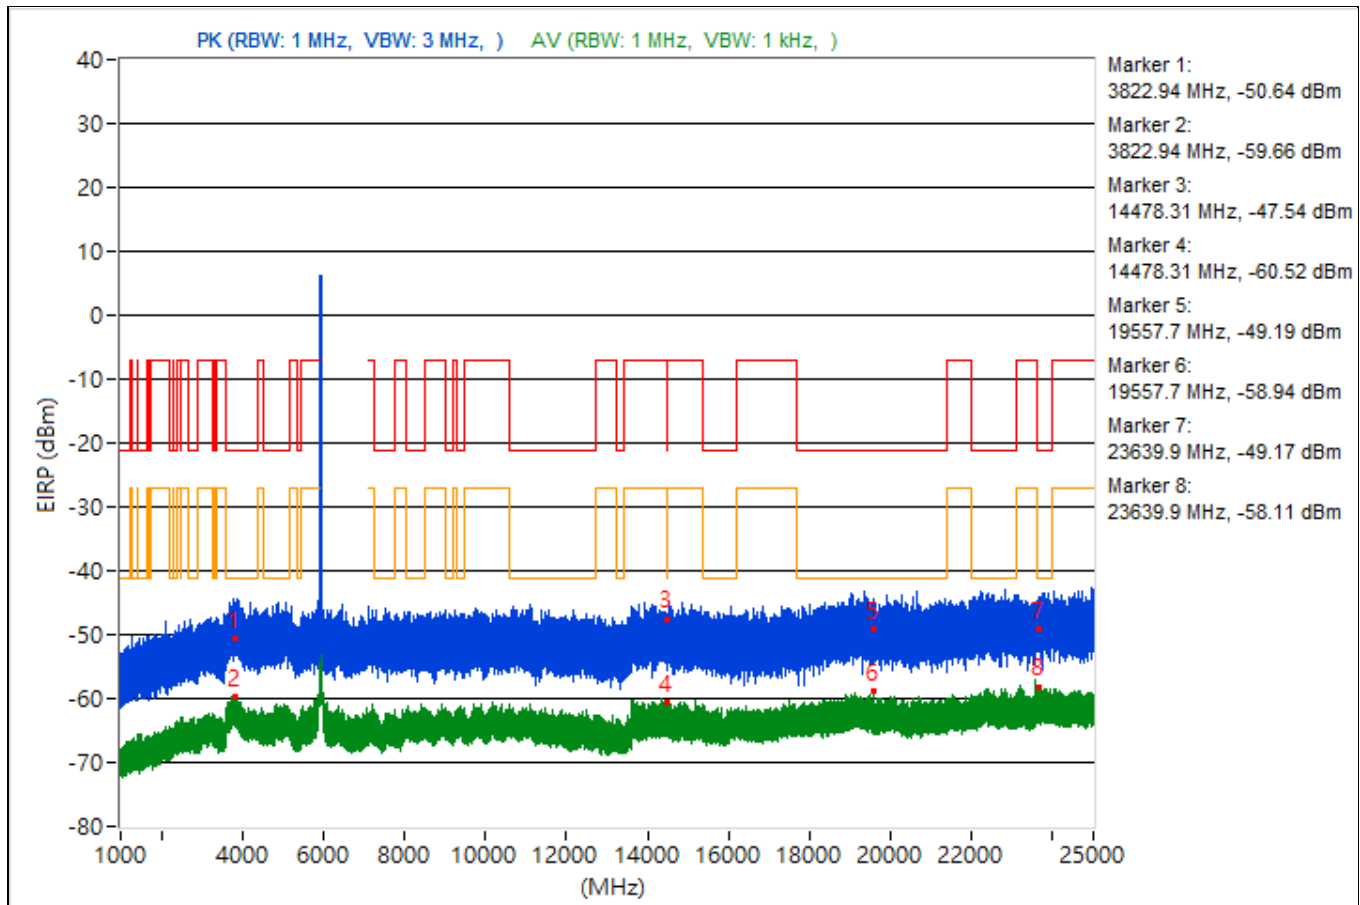


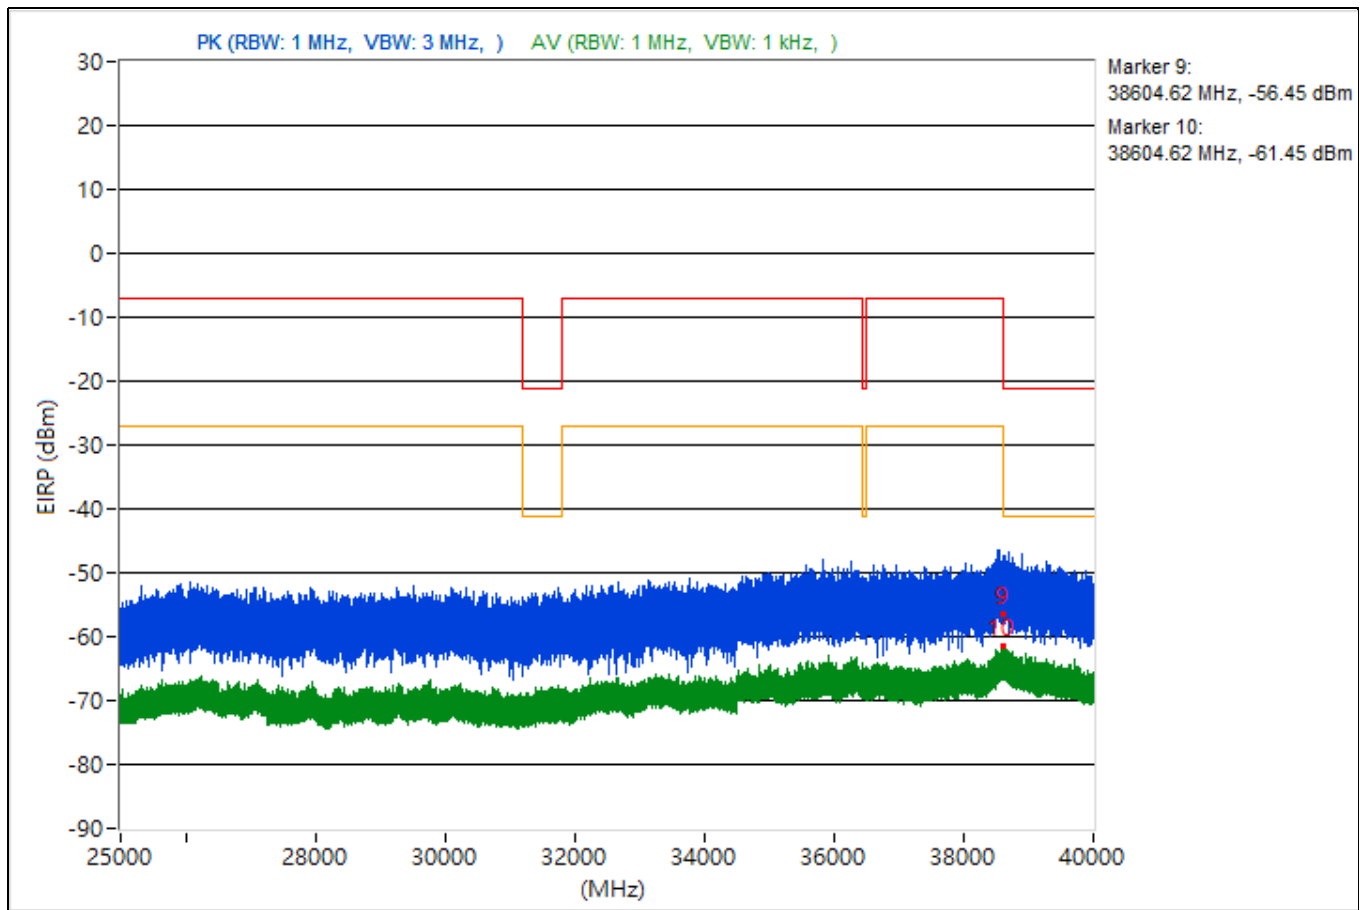


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3773.87	48.87 PK	74	-25.13	-51.31	4.92	-46.39
2	3773.87	35.7 AV	54	-18.3	-64.48	4.92	-59.56
3	14495.38	45.16 PK	74	-28.84	-55.02	4.92	-50.1
4	14495.38	34.47 AV	54	-19.53	-65.71	4.92	-60.79
5	19290.3	46.23 PK	74	-27.77	-53.95	4.92	-49.03
6	19290.3	36.03 AV	54	-17.97	-64.15	4.92	-59.23
7	22720.6	47.14 PK	74	-26.86	-53.04	4.92	-48.12
8	22720.6	37.26 AV	54	-16.74	-62.92	4.92	-58
9	38629.6	45.53 PK	74	-28.47	-54.65	4.92	-49.73
10	38629.6	33.26 AV	54	-20.74	-66.92	4.92	-62

Note: Margin value = Emission Level - Limit value

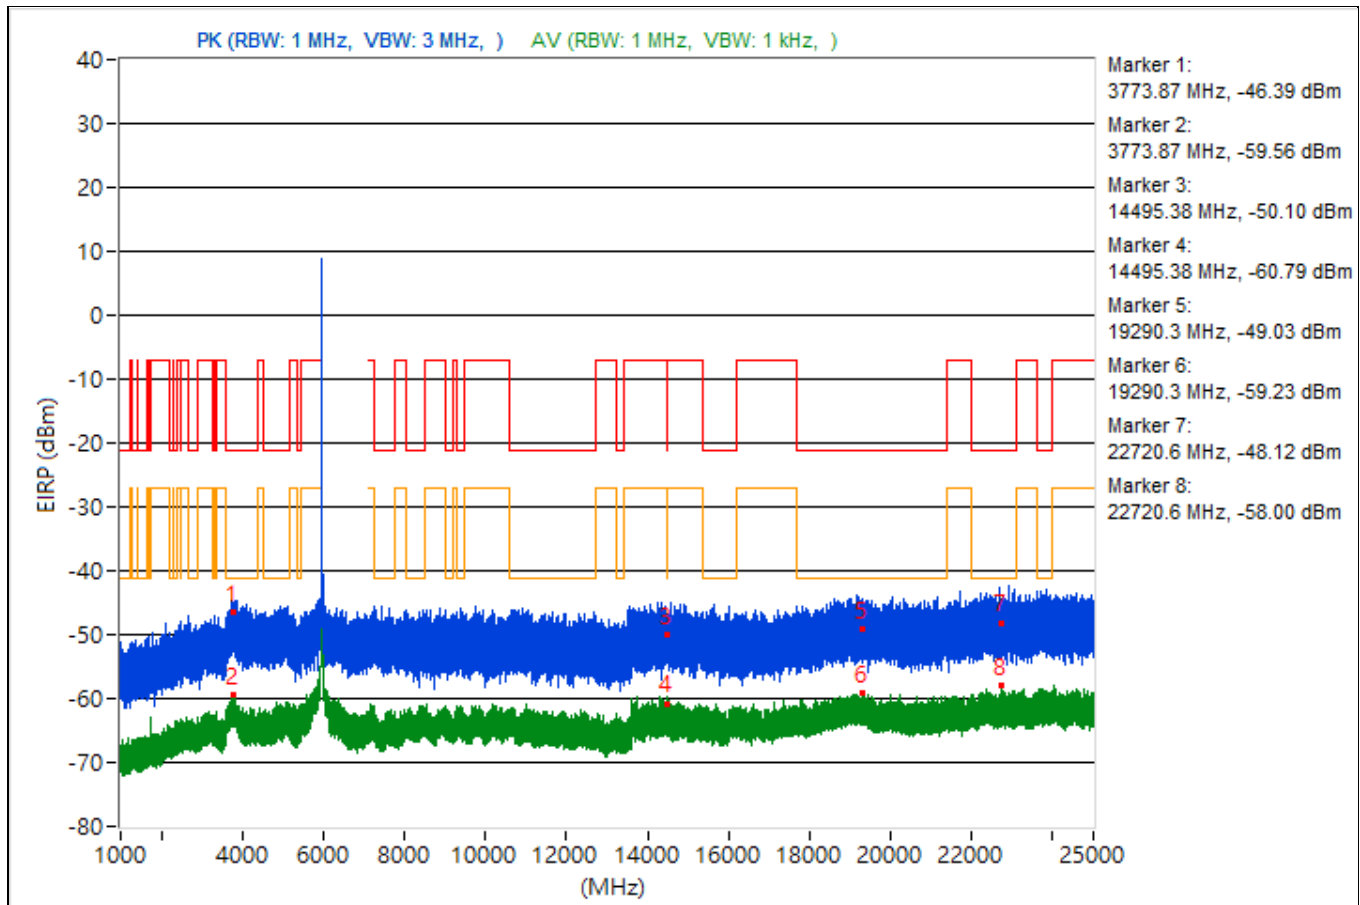


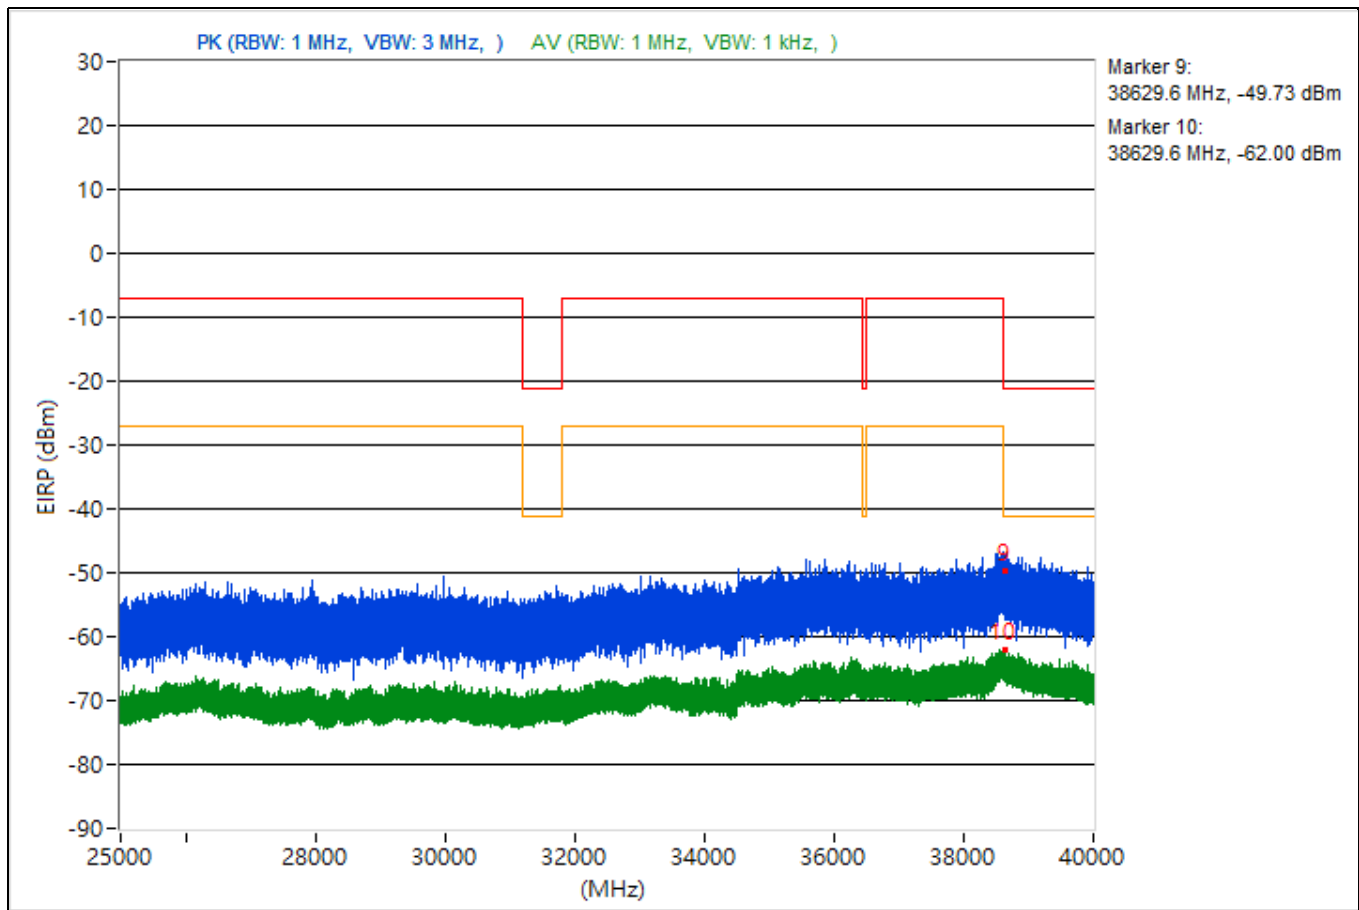


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.19	47.33 PK	74	-26.67	-52.85	4.92	-47.93
2	3782.19	35.48 AV	54	-18.52	-64.7	4.92	-59.78
3	14494.67	43.85 PK	74	-30.15	-56.33	4.92	-51.41
4	14494.67	35.03 AV	54	-18.97	-65.15	4.92	-60.23
5	19384.4	45.64 PK	74	-28.36	-54.54	4.92	-49.62
6	19384.4	36.25 AV	54	-17.75	-63.93	4.92	-59.01
7	23726.3	45.33 PK	74	-28.67	-54.85	4.92	-49.93
8	23726.3	37.18 AV	54	-16.82	-63	4.92	-58.08
9	38621.78	42.96 PK	74	-31.04	-57.22	4.92	-52.3
10	38621.78	33.43 AV	54	-20.57	-66.75	4.92	-61.83

Note: Margin value = Emission Level - Limit value

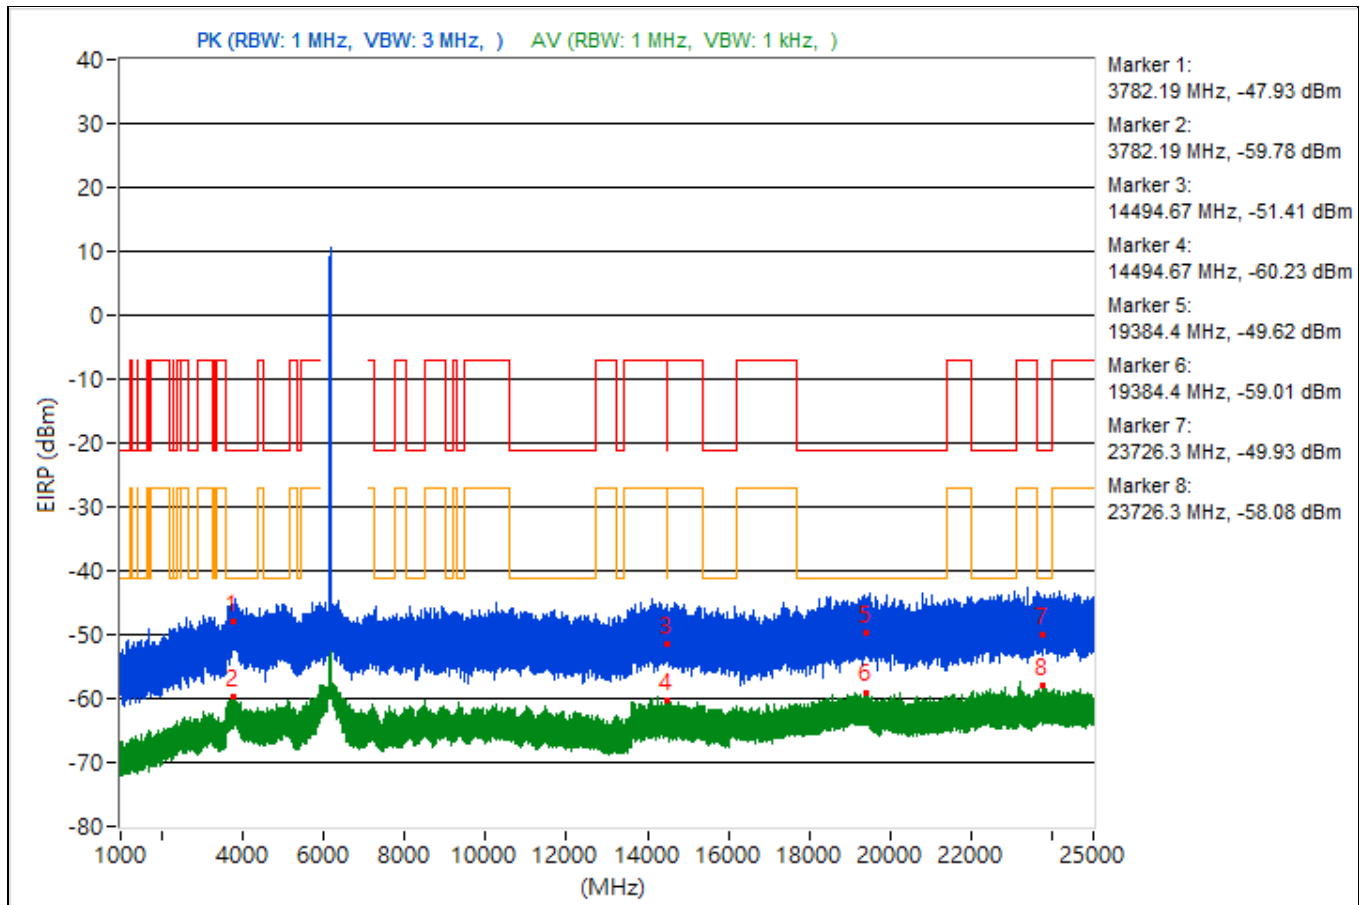


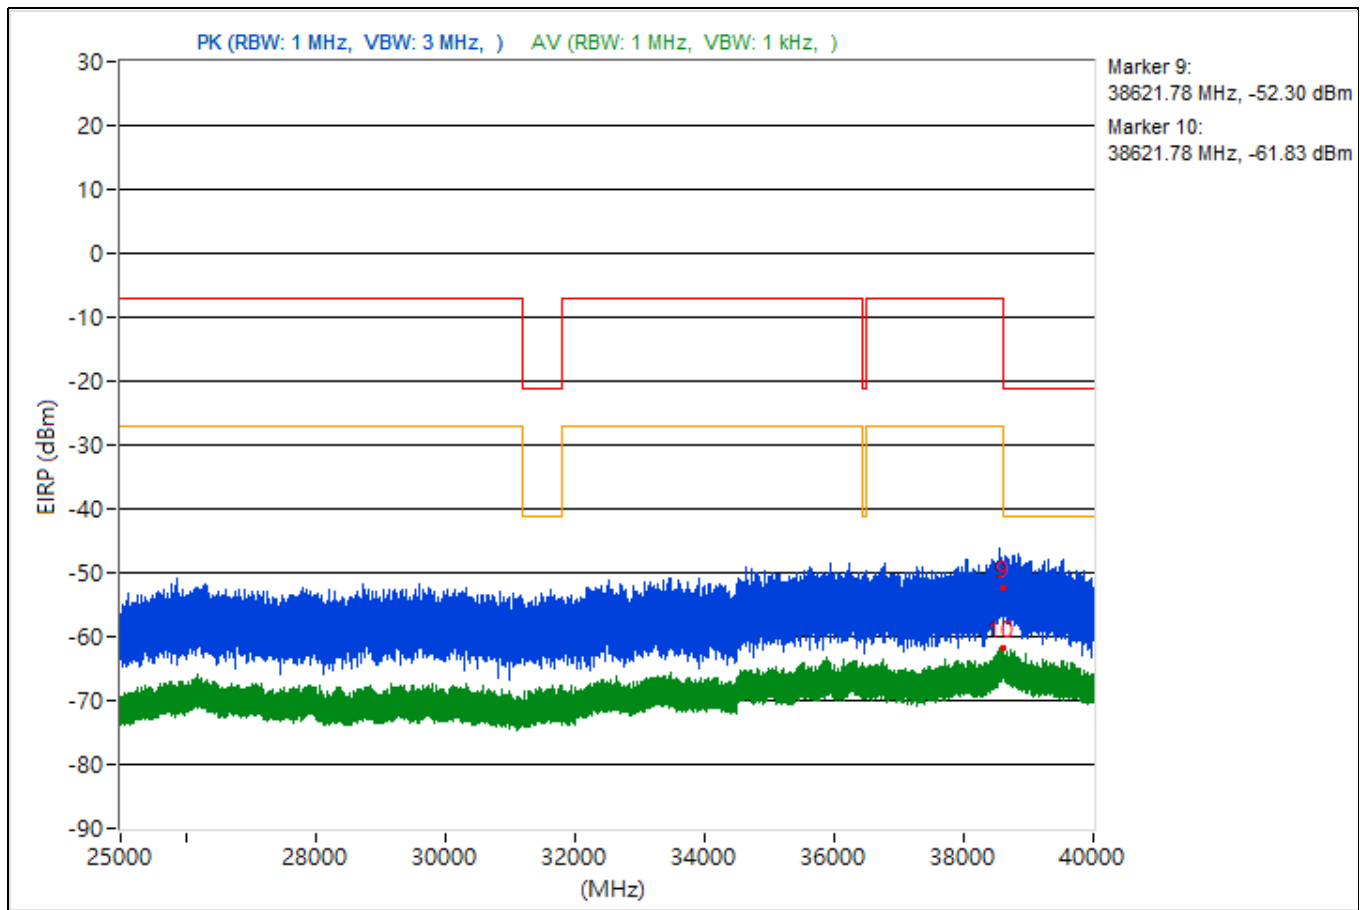


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.91	47.1 PK	74	-26.9	-53.08	4.92	-48.16
2	3777.91	35.81 AV	54	-18.19	-64.37	4.92	-59.45
3	14480.53	43.9 PK	74	-30.1	-56.28	4.92	-51.36
4	14480.53	34.61 AV	54	-19.39	-65.57	4.92	-60.65
5	19211	47.4 PK	74	-26.6	-52.78	4.92	-47.86
6	19211	36.05 AV	54	-17.95	-64.13	4.92	-59.21
7	22388.2	45.34 PK	74	-28.66	-54.84	4.92	-49.92
8	22388.2	37.36 AV	54	-16.64	-62.82	4.92	-57.9
9	38655.91	40.89 PK	74	-33.11	-59.29	4.92	-54.37
10	38655.91	34.08 AV	54	-19.92	-66.1	4.92	-61.18

Note: Margin value = Emission Level - Limit value

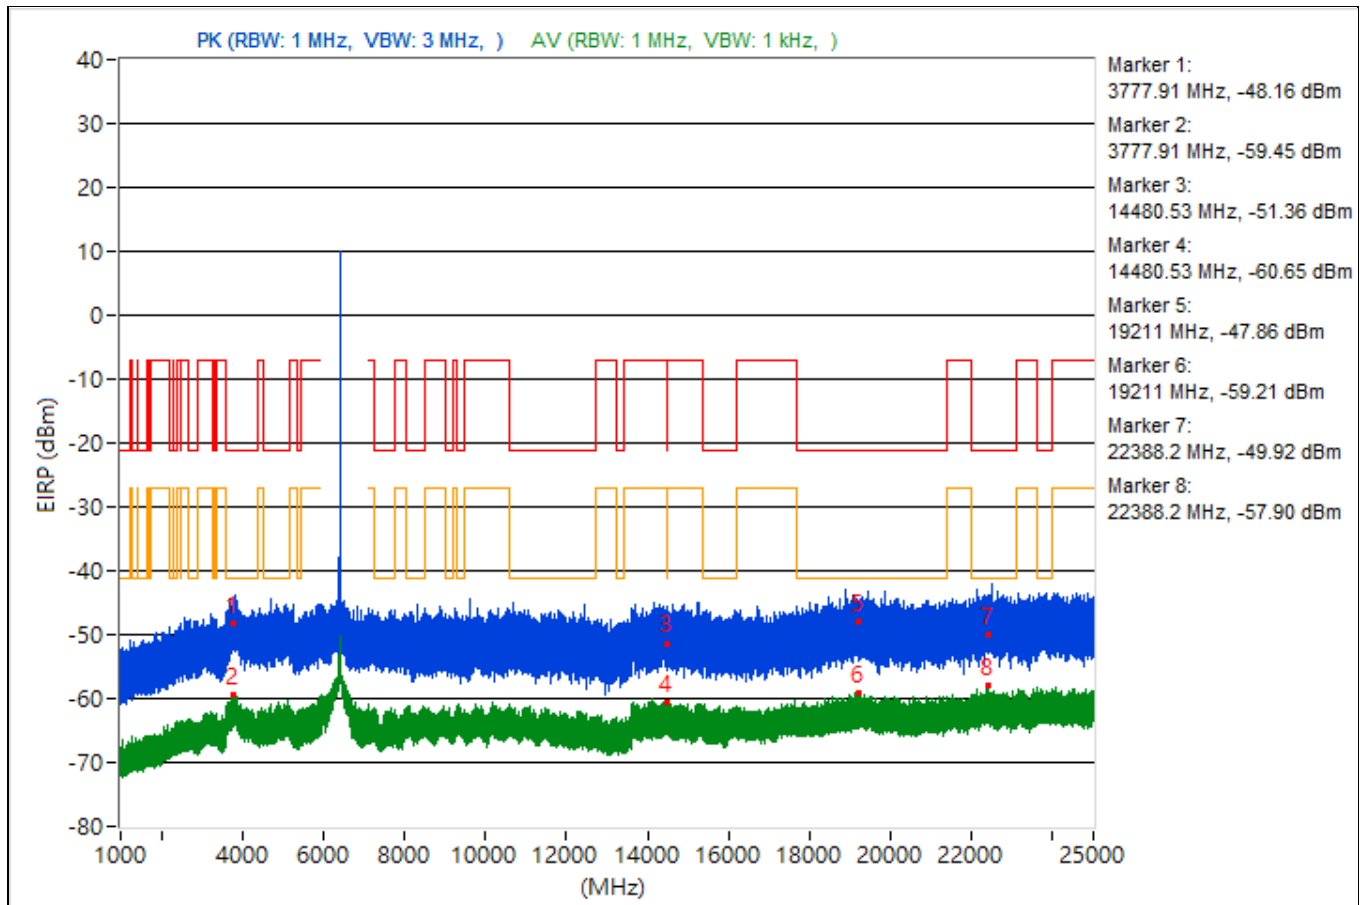


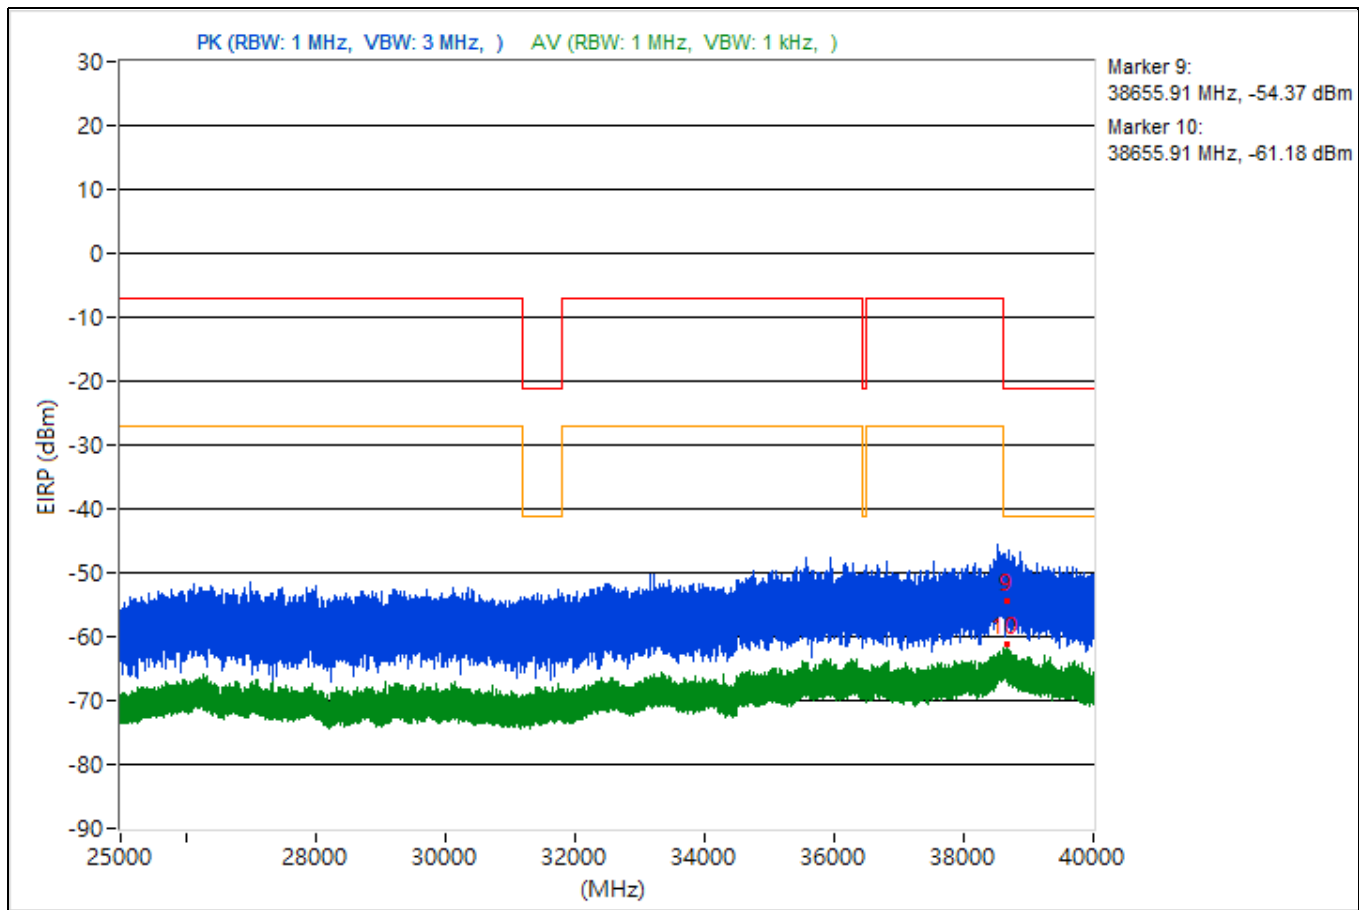


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3866.81	46.92 PK	74	-27.08	-53.26	4.92	-48.34
2	3866.81	35.83 AV	54	-18.17	-64.35	4.92	-59.43
3	8473.42	42.93 PK	74	-31.07	-57.25	4.92	-52.33
4	8473.42	34.82 AV	54	-19.18	-65.36	4.92	-60.44
5	19017.1	43.88 PK	74	-30.12	-56.3	4.92	-51.38
6	19017.1	36.09 AV	54	-17.91	-64.09	4.92	-59.17
7	23880.6	46.7 PK	74	-27.3	-53.48	4.92	-48.56
8	23880.6	37.32 AV	54	-16.68	-62.86	4.92	-57.94
9	38627.29	41.9 PK	74	-32.1	-58.28	4.92	-53.36
10	38627.29	33.34 AV	54	-20.66	-66.84	4.92	-61.92

Note: Margin value = Emission Level - Limit value

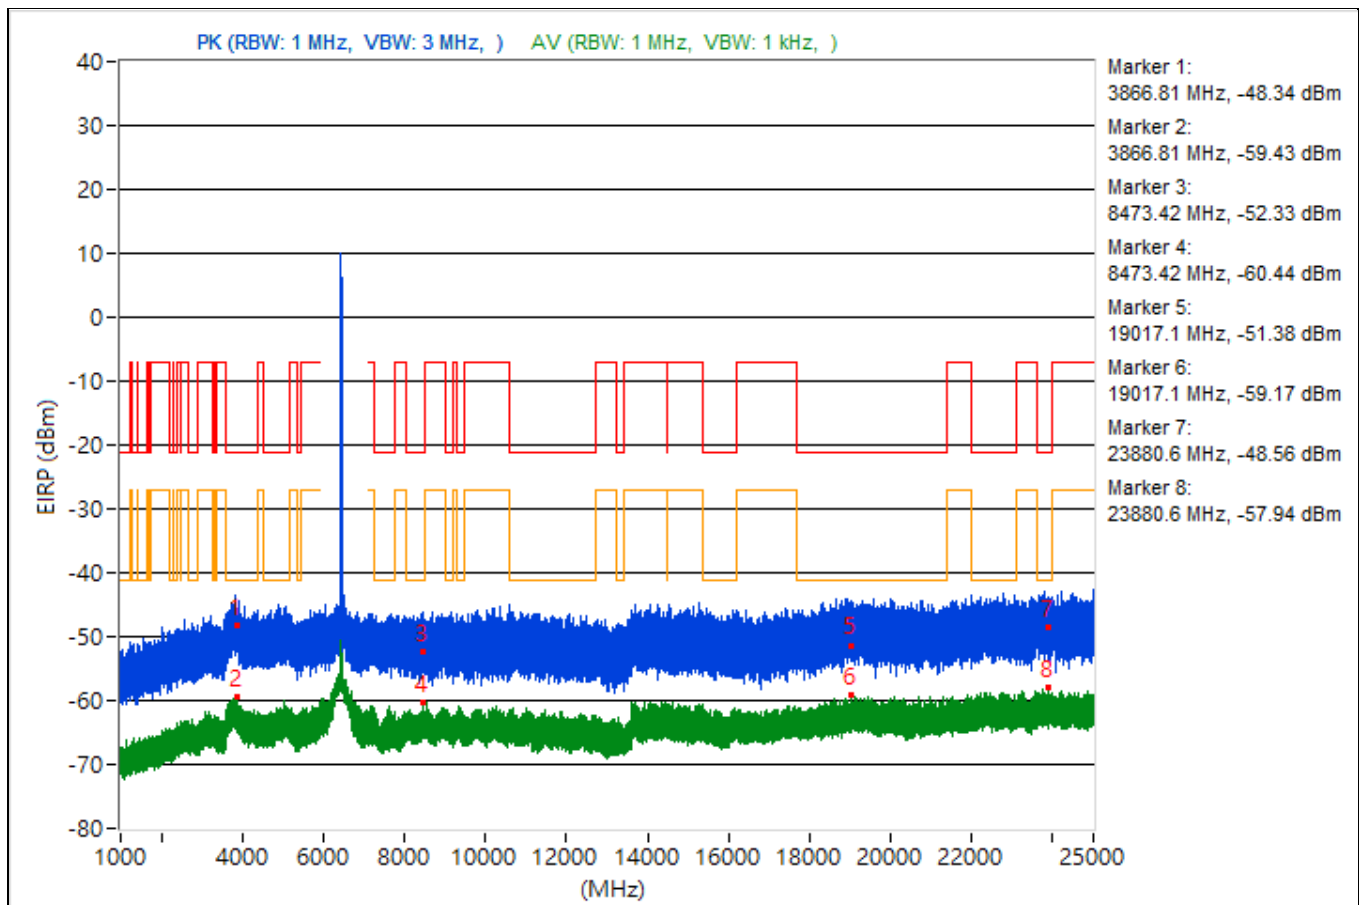


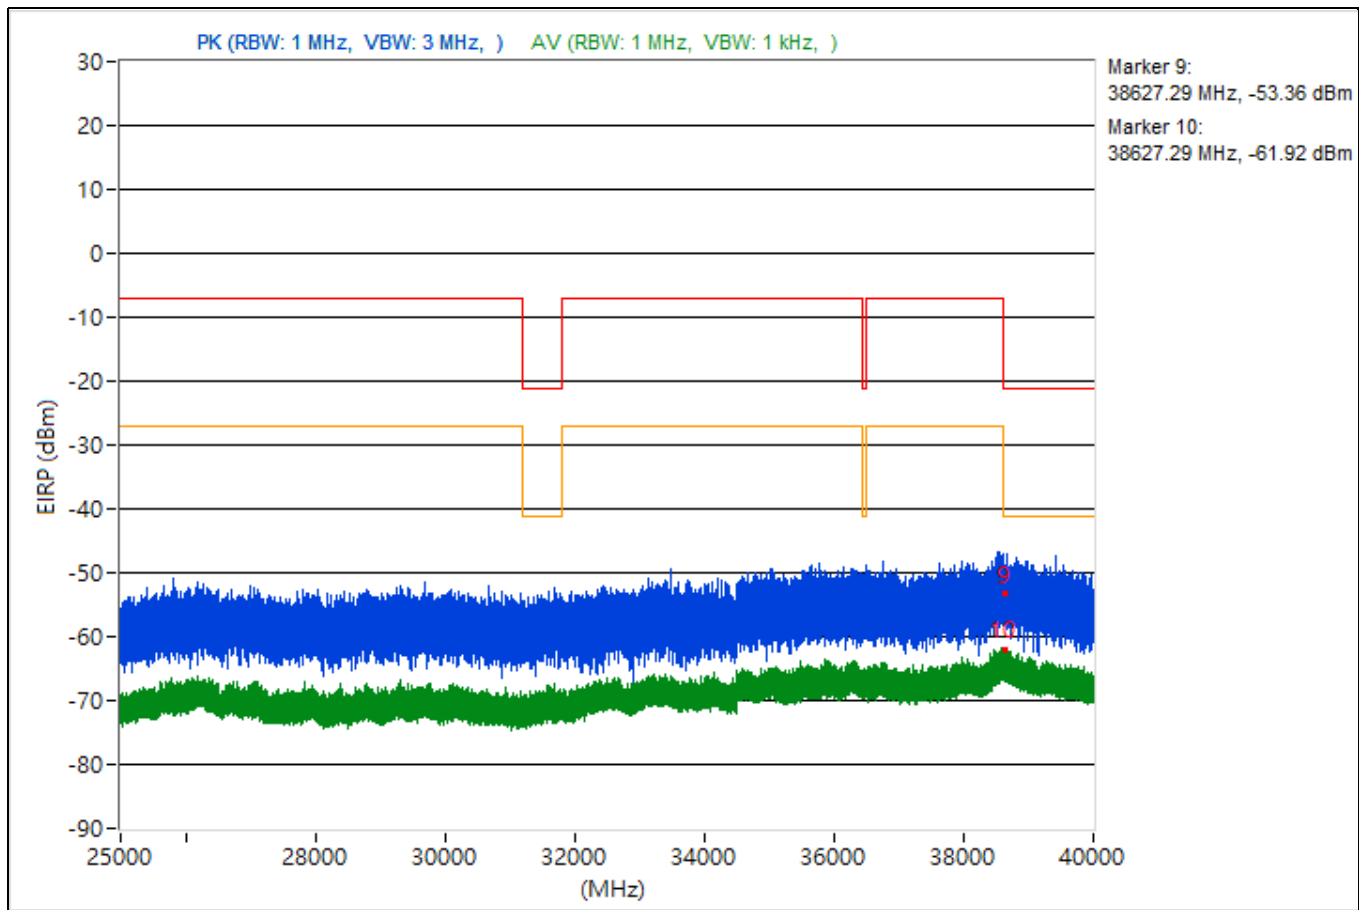


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.26	50.17 PK	74	-23.83	-50.01	4.92	-45.09
2	3809.26	36.06 AV	54	-17.94	-64.12	4.92	-59.2
3	14471.73	46.24 PK	74	-27.76	-53.94	4.92	-49.02
4	14471.73	34.91 AV	54	-19.09	-65.27	4.92	-60.35
5	19340.5	46.41 PK	74	-27.59	-53.77	4.92	-48.85
6	19340.5	36.04 AV	54	-17.96	-64.14	4.92	-59.22
7	23889.9	48.16 PK	74	-25.84	-52.02	4.92	-47.1
8	23889.9	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38620.09	42.8 PK	74	-31.2	-57.38	4.92	-52.46
10	38620.09	33.43 AV	54	-20.57	-66.75	4.92	-61.83

Note: Margin value = Emission Level - Limit value

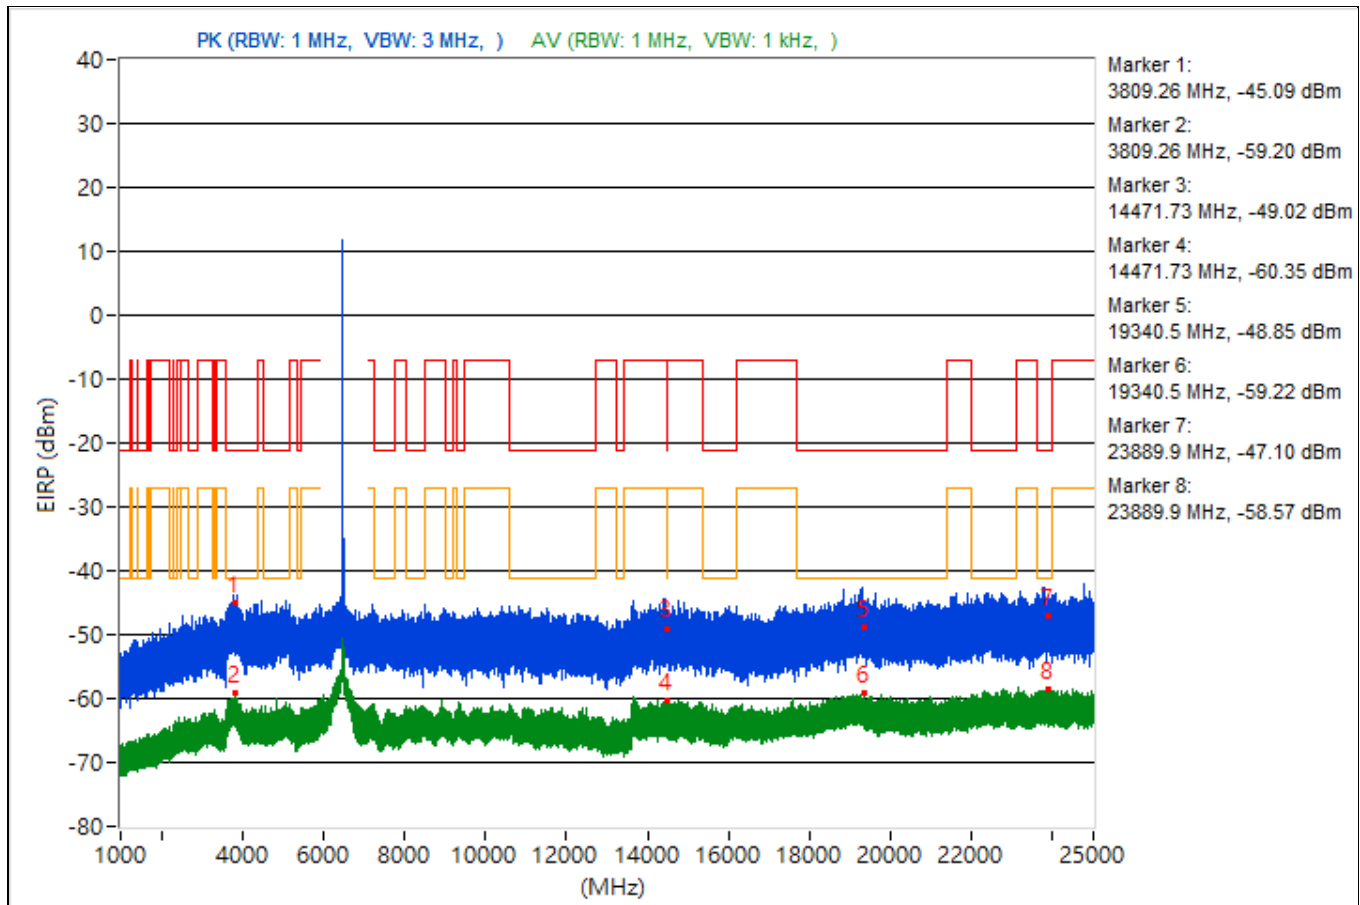


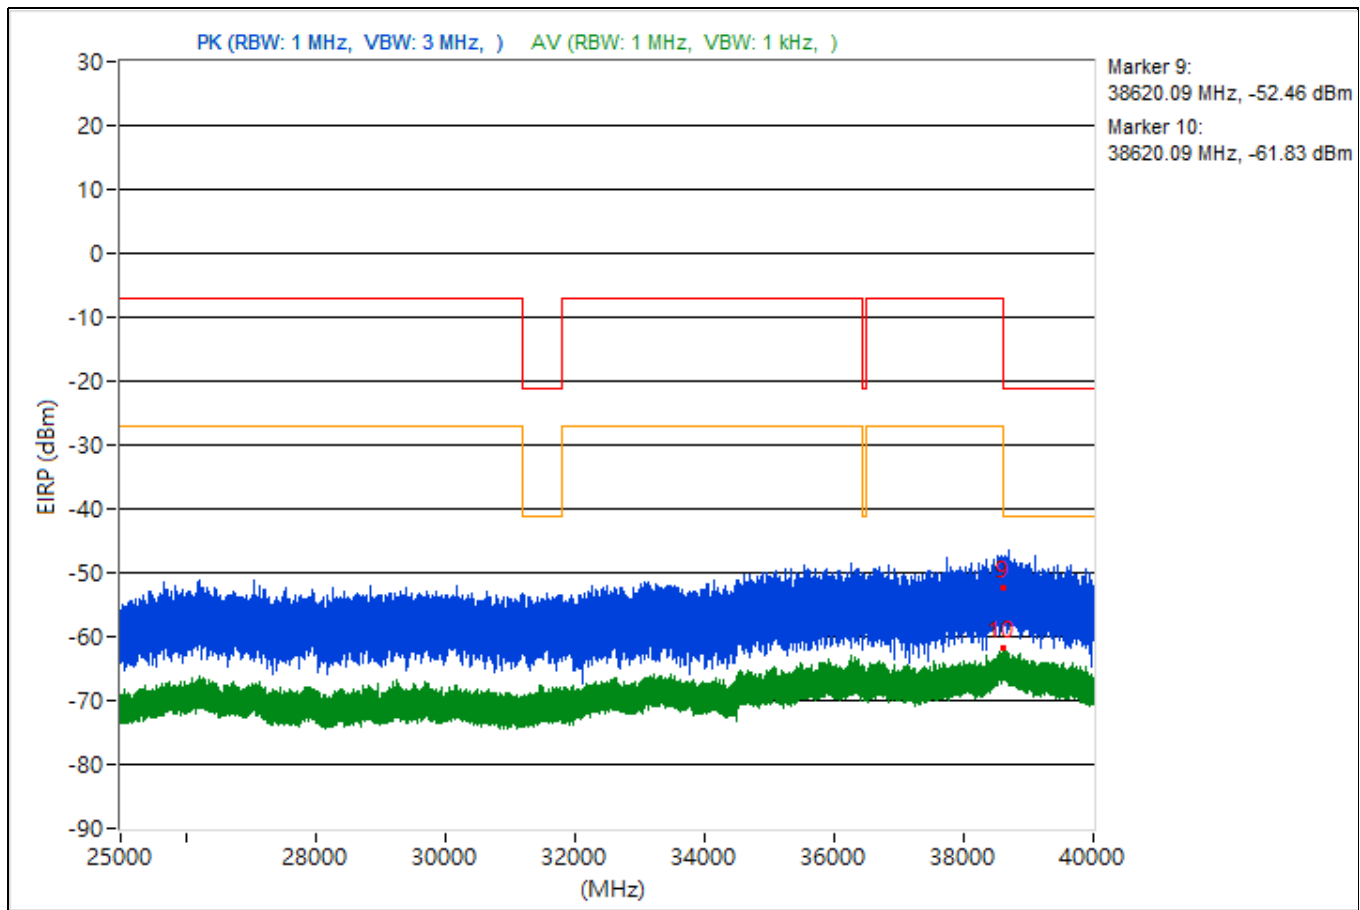


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3769.51	45.68 PK	74	-28.32	-54.5	4.92	-49.58
2	3769.51	35.47 AV	54	-18.53	-64.71	4.92	-59.79
3	14483.64	44.96 PK	74	-29.04	-55.22	4.92	-50.3
4	14483.64	34.85 AV	54	-19.15	-65.33	4.92	-60.41
5	19188.9	46.71 PK	74	-27.29	-53.47	4.92	-48.55
6	19188.9	36.62 AV	54	-17.38	-63.56	4.92	-58.64
7	23799.1	48.41 PK	74	-25.59	-51.77	4.92	-46.85
8	23799.1	37.1 AV	54	-16.9	-63.08	4.92	-58.16
9	38644.27	44.97 PK	74	-29.03	-55.21	4.92	-50.29
10	38644.27	34.06 AV	54	-19.94	-66.12	4.92	-61.2

Note: Margin value = Emission Level - Limit value

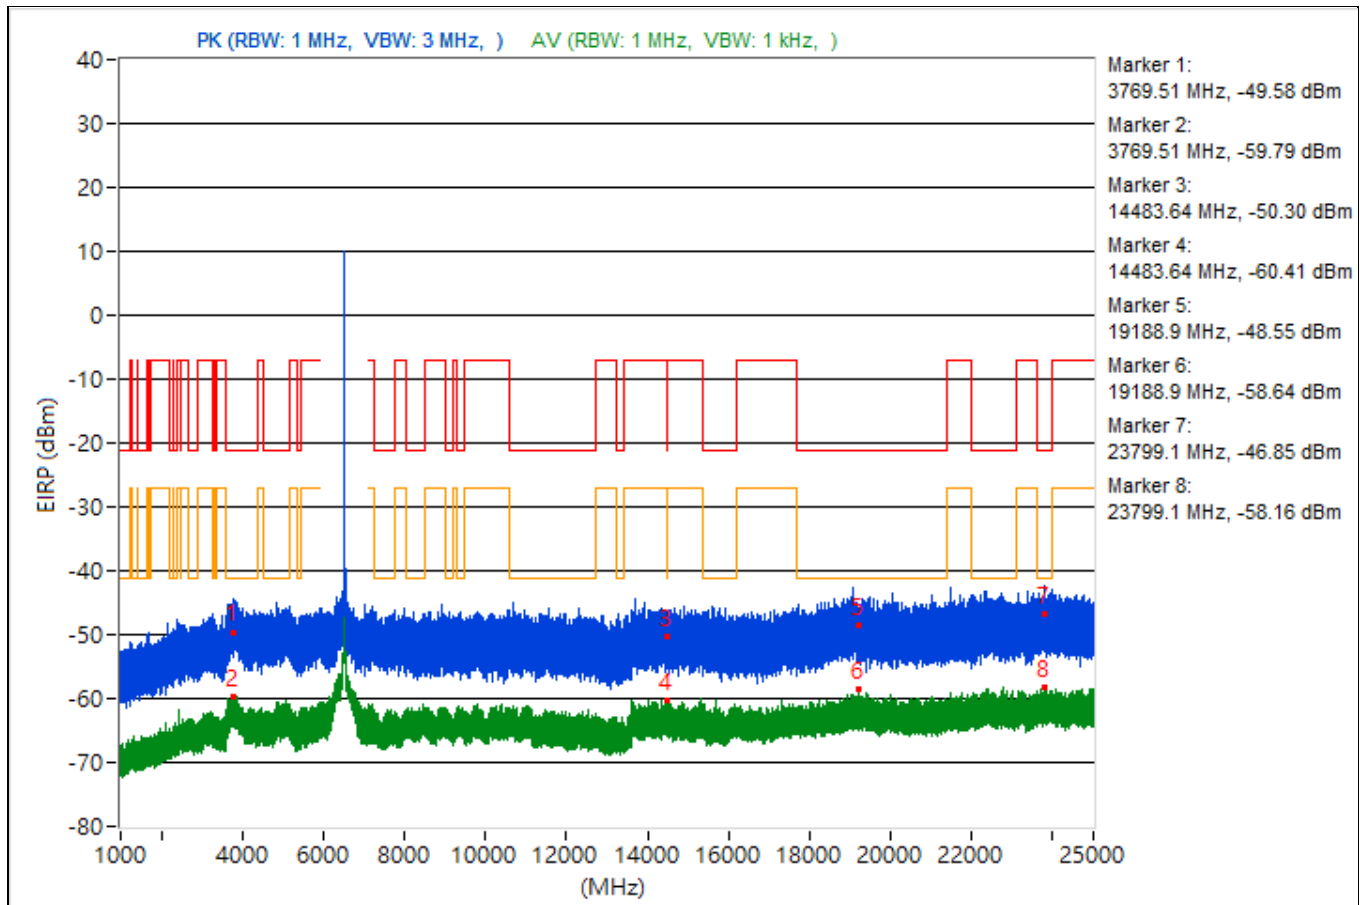


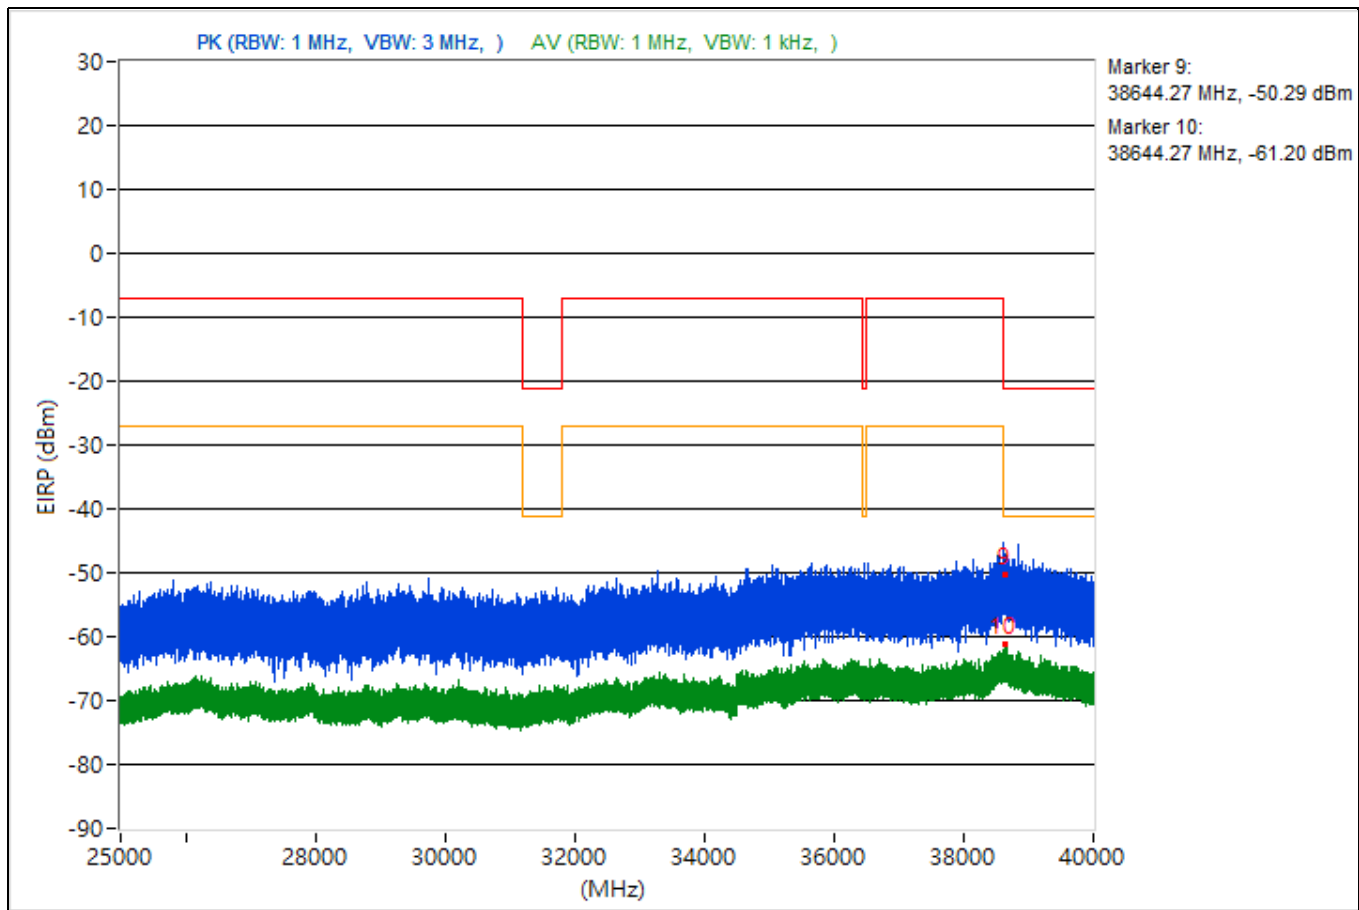


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.5	47.74 PK	74	-26.26	-52.44	4.92	-47.52
2	3782.5	35.31 AV	54	-18.69	-64.87	4.92	-59.95
3	8432.18	45.73 PK	74	-28.27	-54.45	4.92	-49.53
4	8432.18	34.82 AV	54	-19.18	-65.36	4.92	-60.44
5	18900.6	43.51 PK	74	-30.49	-56.67	4.92	-51.75
6	18900.6	36.15 AV	54	-17.85	-64.03	4.92	-59.11
7	23724.3	47.32 PK	74	-26.68	-52.86	4.92	-47.94
8	23724.3	36.89 AV	54	-17.11	-63.29	4.92	-58.37
9	38611.38	41.16 PK	74	-32.84	-59.02	4.92	-54.1
10	38611.38	31.96 AV	54	-22.04	-68.22	4.92	-63.3

Note: Margin value = Emission Level - Limit value

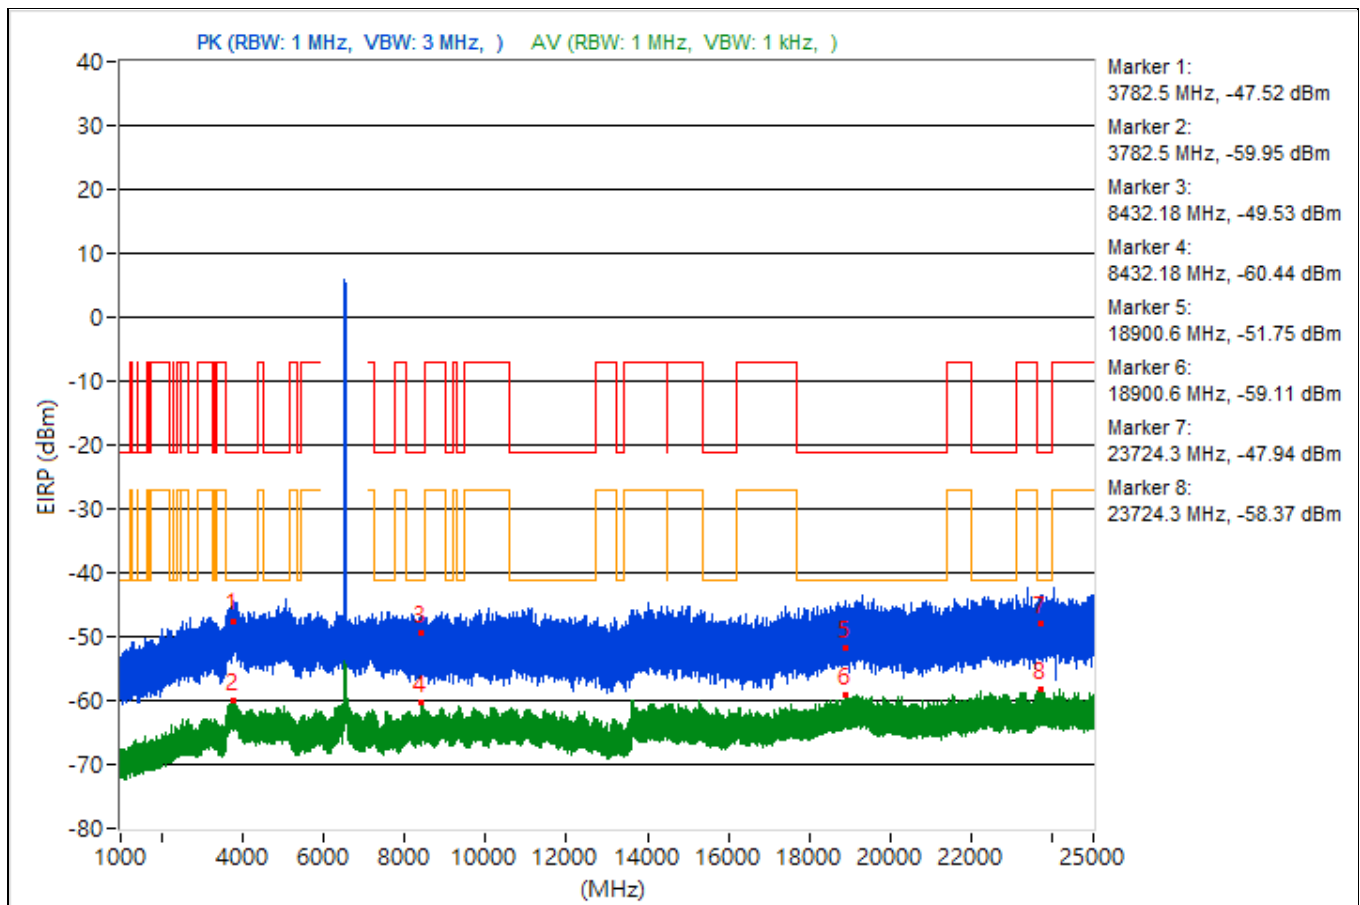


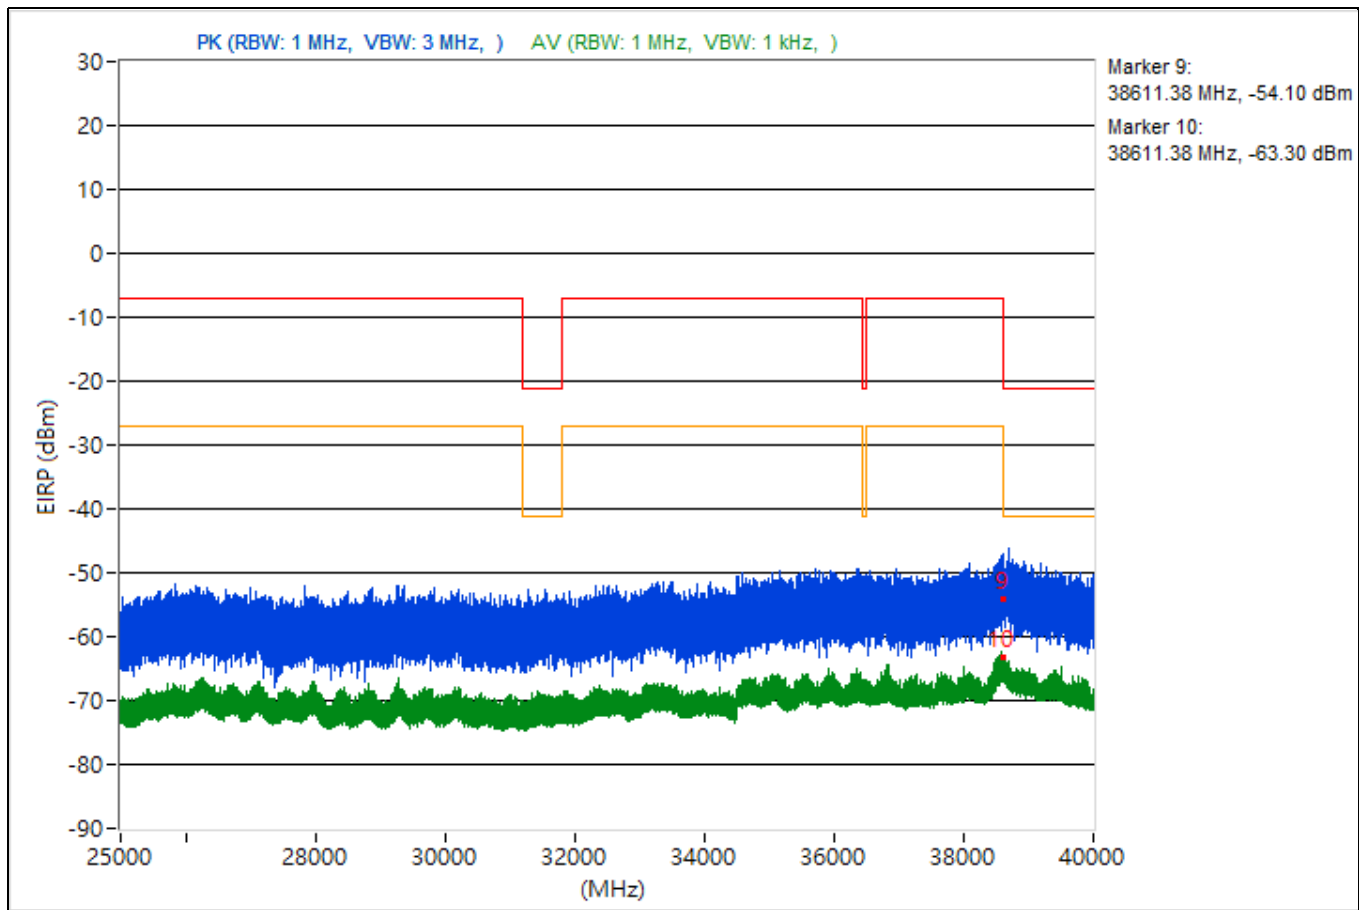


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.03	48.46 PK	74	-25.54	-51.72	4.92	-46.8
2	3810.03	35.65 AV	54	-18.35	-64.53	4.92	-59.61
3	9009.6	44.13 PK	74	-29.87	-56.05	4.92	-51.13
4	9009.6	34.84 AV	54	-19.16	-65.34	4.92	-60.42
5	18963.4	44.34 PK	74	-29.66	-55.84	4.92	-50.92
6	18963.4	36.23 AV	54	-17.77	-63.95	4.92	-59.03
7	23684.7	43.44 PK	74	-30.56	-56.74	4.92	-51.82
8	23684.7	36.87 AV	54	-17.13	-63.31	4.92	-58.39
9	38606.76	45.64 PK	74	-28.36	-54.54	4.92	-49.62
10	38606.76	33.62 AV	54	-20.38	-66.56	4.92	-61.64

Note: Margin value = Emission Level - Limit value

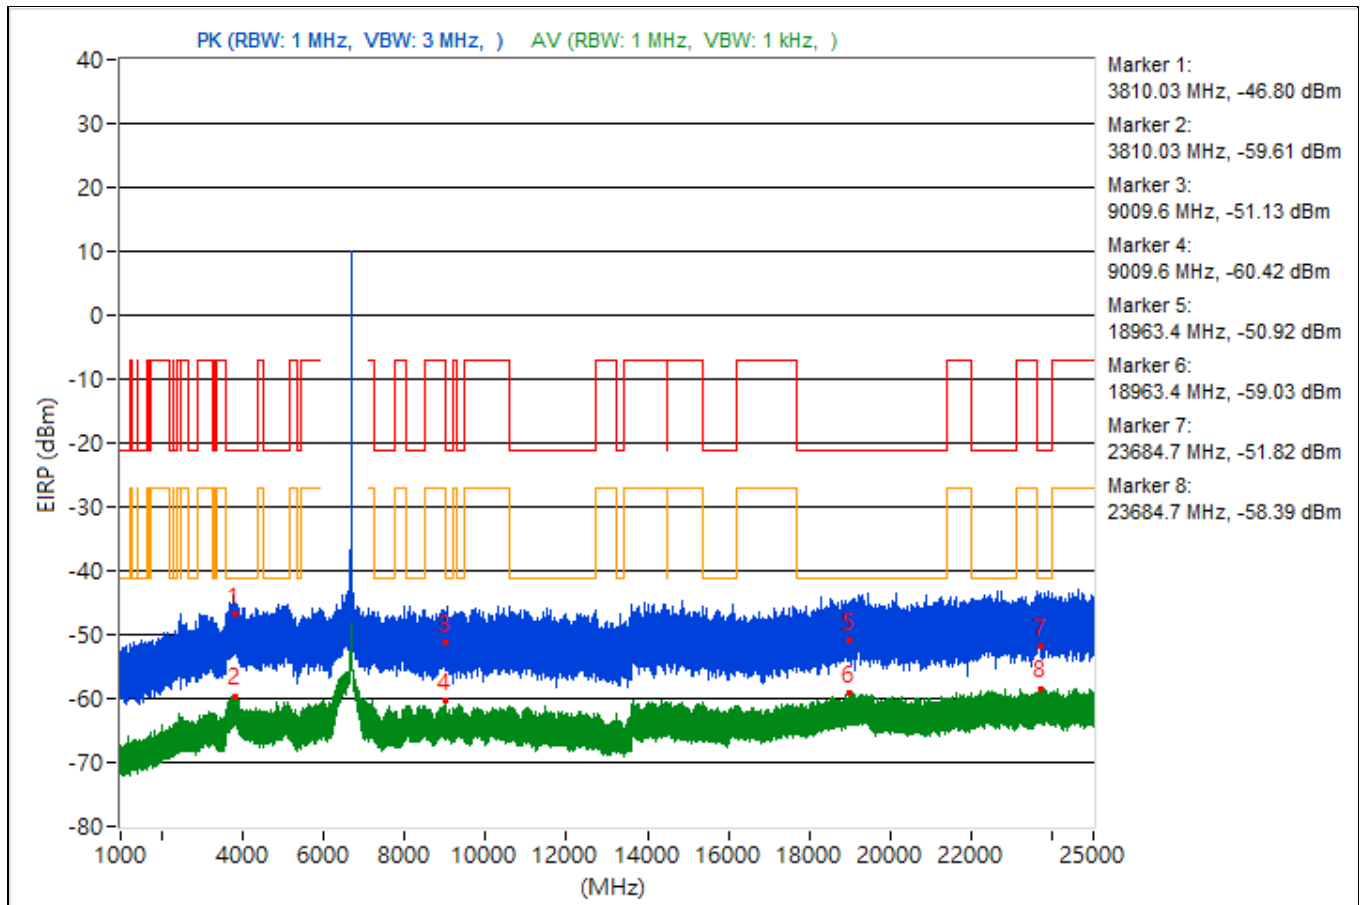


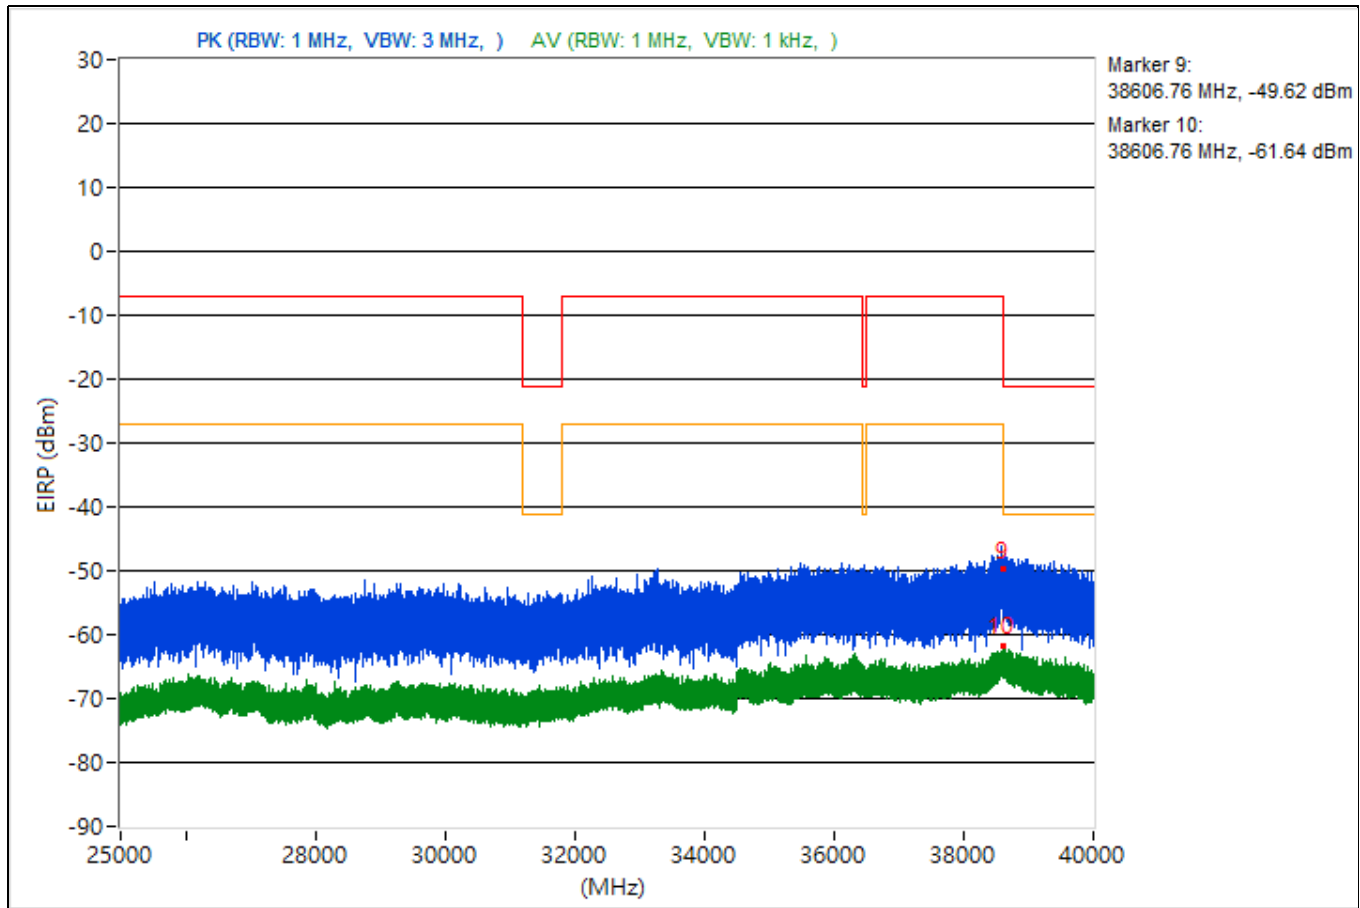


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.97	45.84 PK	74	-28.16	-54.34	4.92	-49.42
2	3782.97	35.74 AV	54	-18.26	-64.44	4.92	-59.52
3	7260.96	45.9 PK	74	-28.1	-54.28	4.92	-49.36
4	7260.96	35.23 AV	54	-18.77	-64.95	4.92	-60.03
5	19180.6	46.07 PK	74	-27.93	-54.11	4.92	-49.19
6	19180.6	36.27 AV	54	-17.73	-63.91	4.92	-58.99
7	23609.7	47.23 PK	74	-26.77	-52.95	4.92	-48.03
8	23609.7	37.18 AV	54	-16.82	-63	4.92	-58.08
9	38602.31	42.29 PK	74	-31.71	-57.89	4.92	-52.97
10	38602.31	34.11 AV	54	-19.89	-66.07	4.92	-61.15

Note: Margin value = Emission Level - Limit value

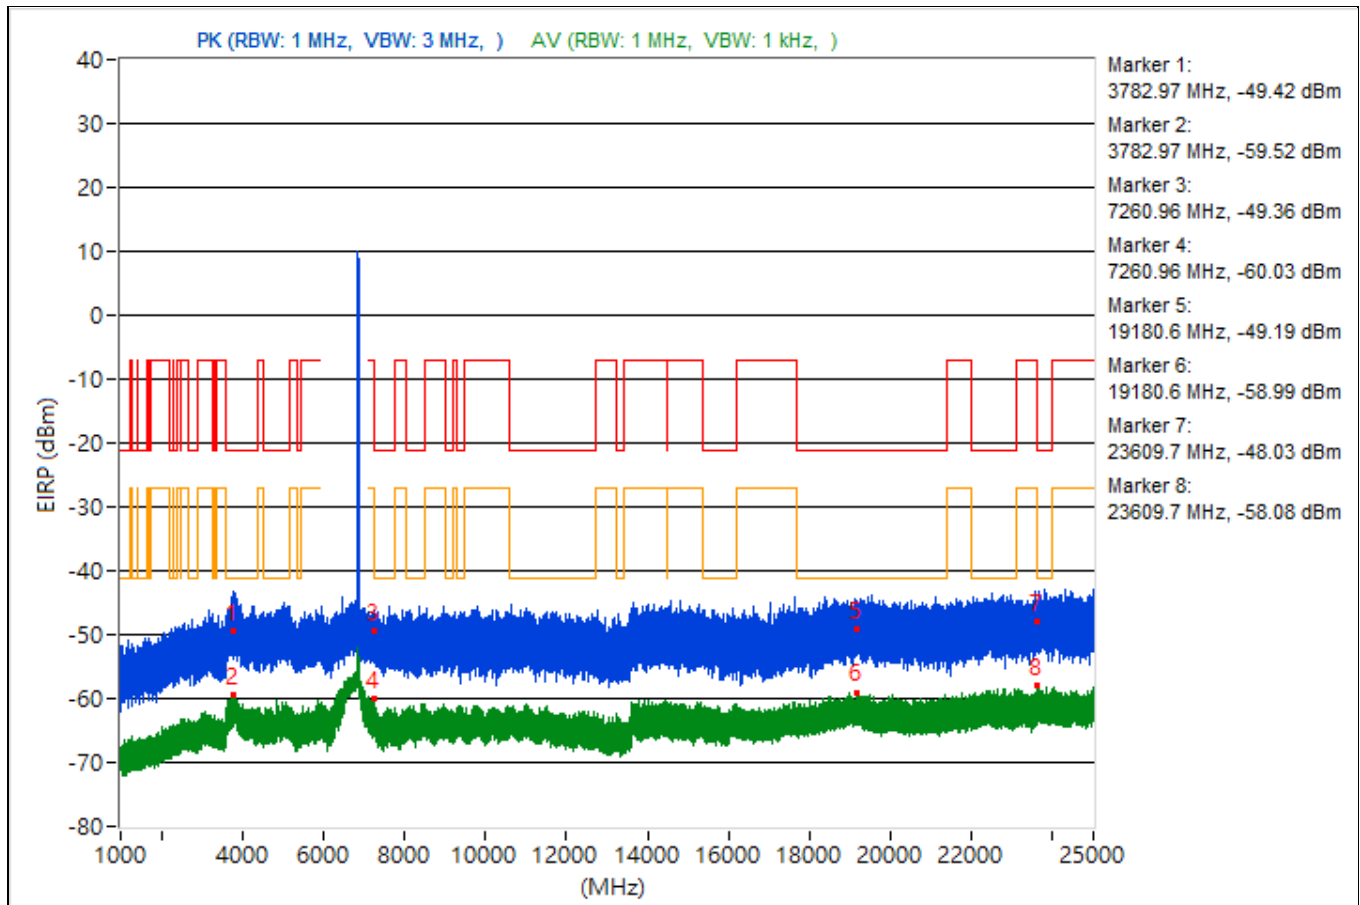


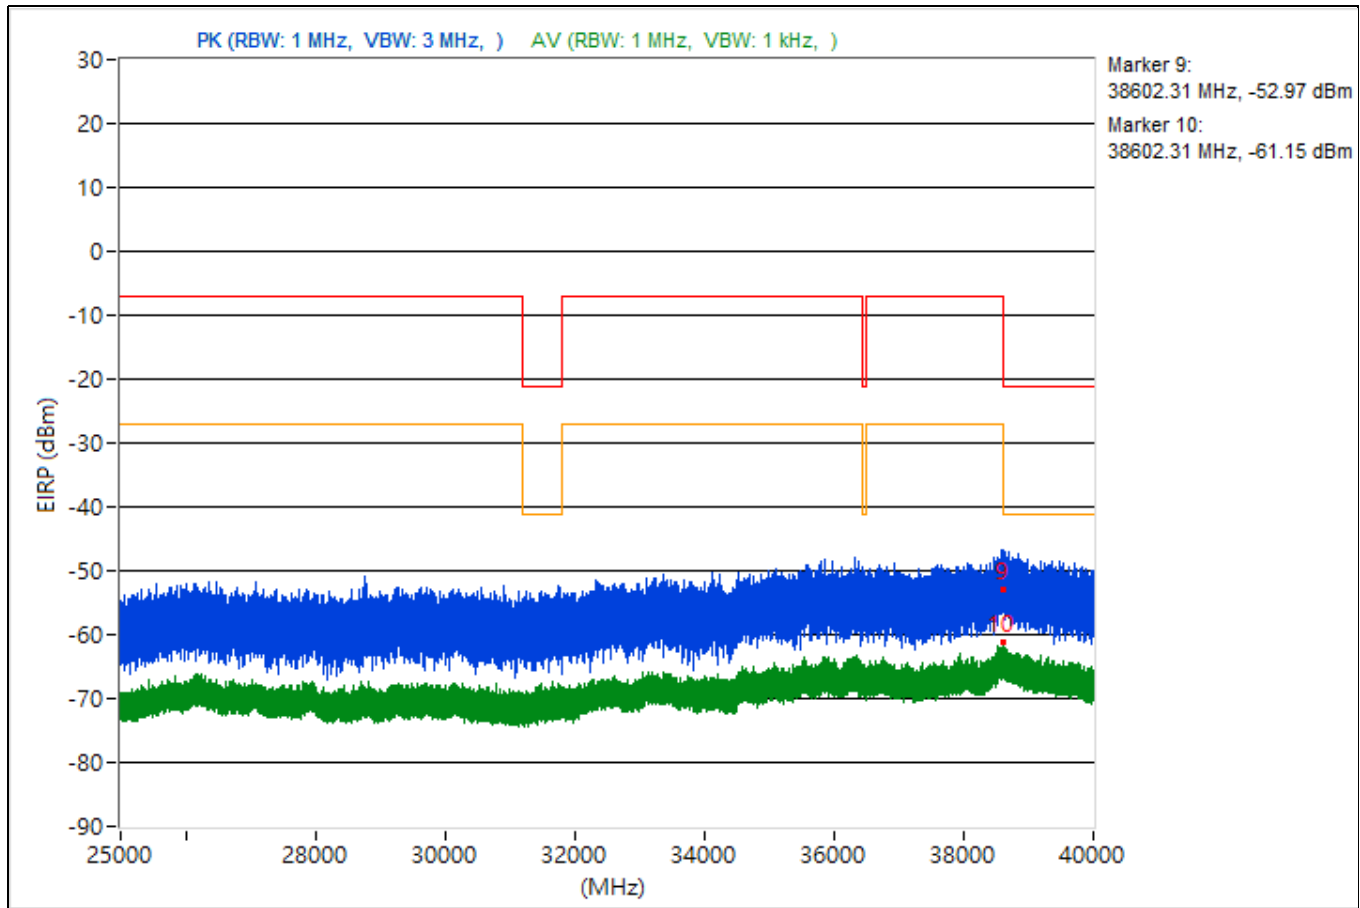


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3839.51	46.14 PK	74	-27.86	-54.04	4.92	-49.12
2	3839.51	35.39 AV	54	-18.61	-64.79	4.92	-59.87
3	14481.96	42.51 PK	74	-31.49	-57.67	4.92	-52.75
4	14481.96	34.82 AV	54	-19.18	-65.36	4.92	-60.44
5	19130.8	49.16 PK	74	-24.84	-51.02	4.92	-46.1
6	19130.8	36.55 AV	54	-17.45	-63.63	4.92	-58.71
7	23624.2	49.28 PK	74	-24.72	-50.9	4.92	-45.98
8	23624.2	37.44 AV	54	-16.56	-62.74	4.92	-57.82
9	38637.78	44.92 PK	74	-29.08	-55.26	4.92	-50.34
10	38637.78	34.05 AV	54	-19.95	-66.13	4.92	-61.21

Note: Margin value = Emission Level - Limit value

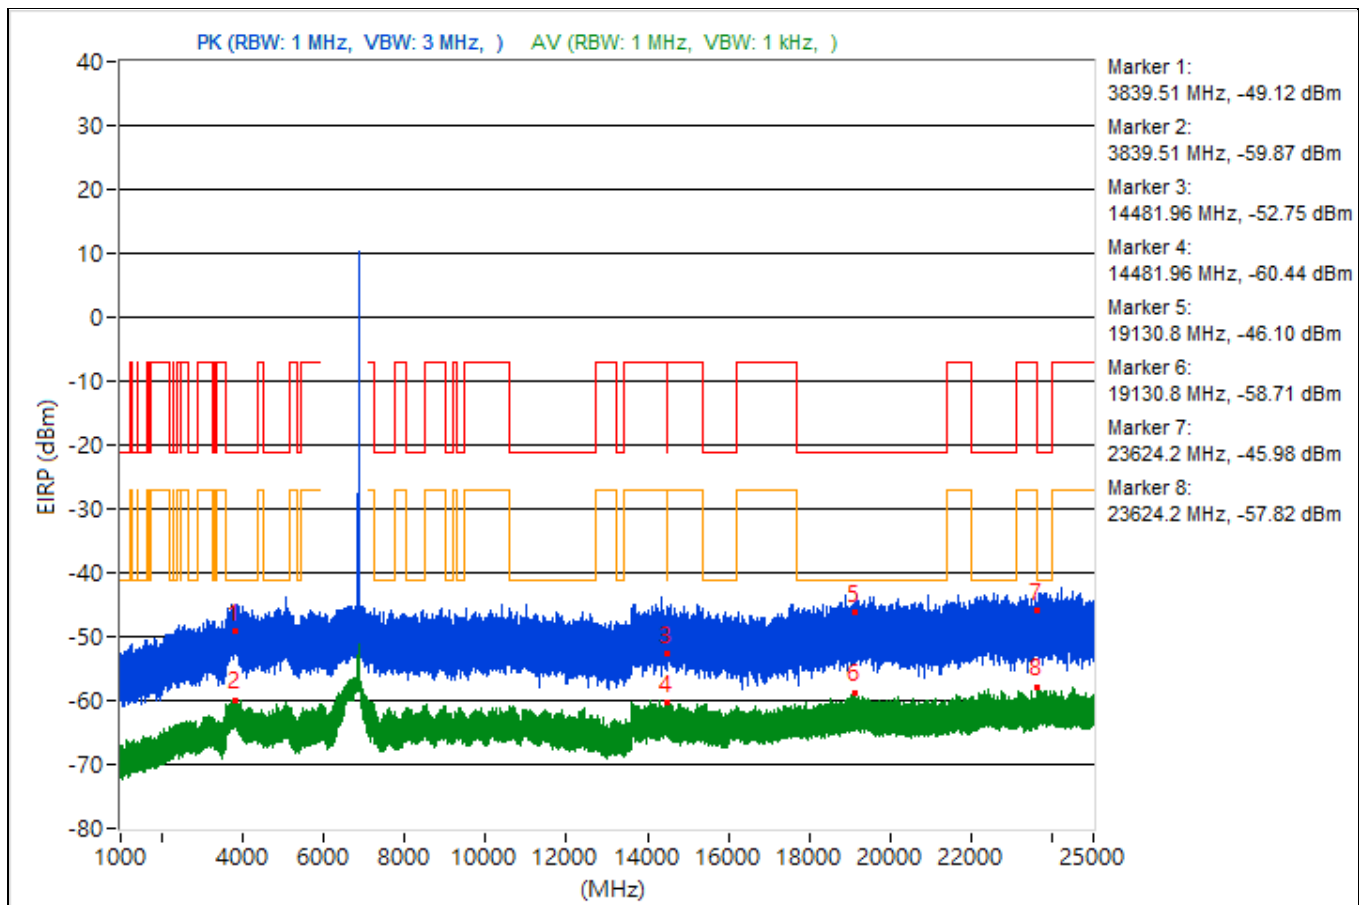


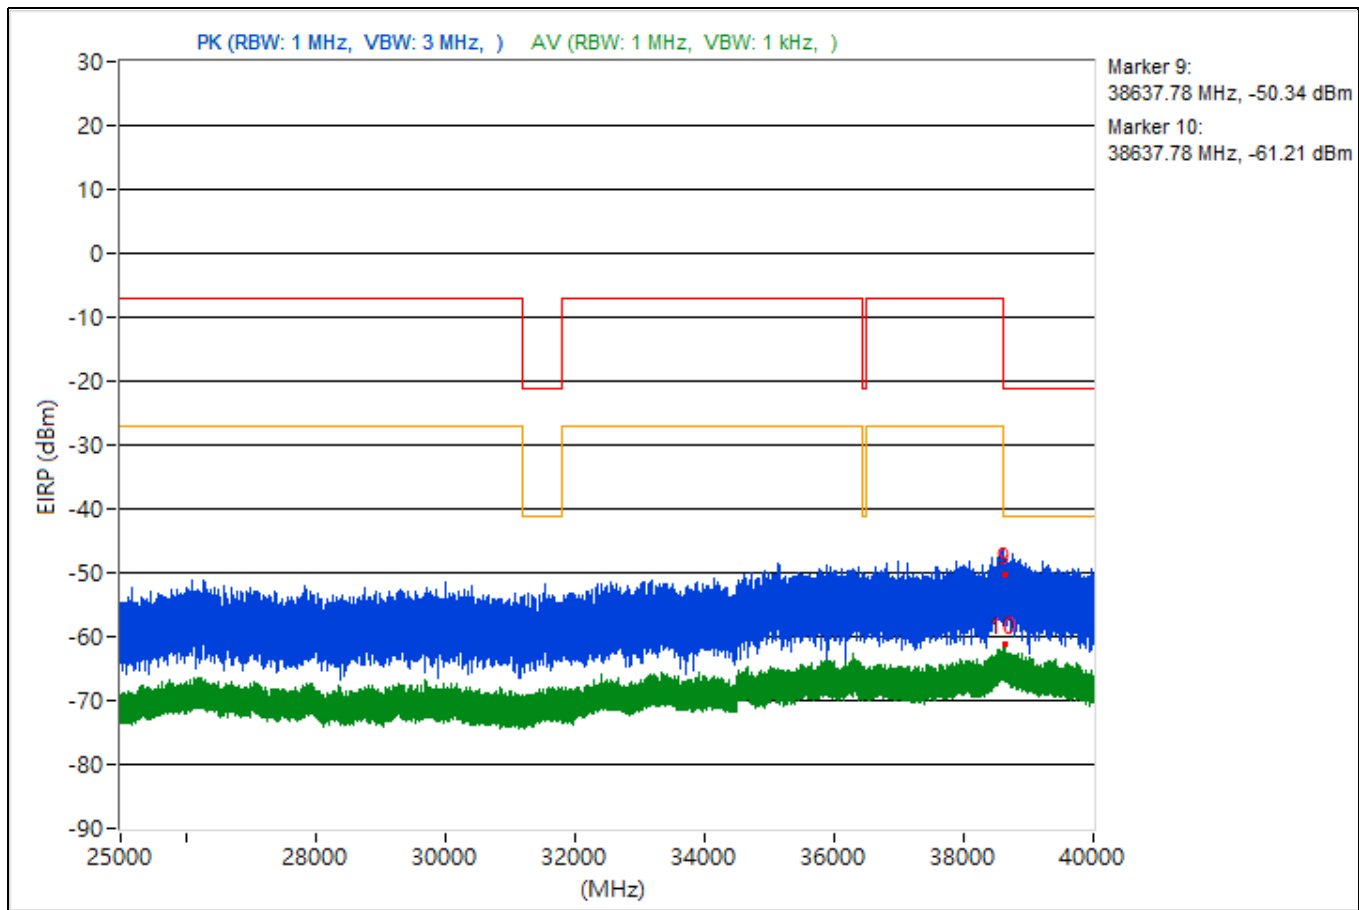


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.99	47.1 PK	74	-26.9	-53.08	4.92	-48.16
2	3770.99	36.02 AV	54	-17.98	-64.16	4.92	-59.24
3	7257.46	47.96 PK	74	-26.04	-52.22	4.92	-47.3
4	7257.46	35.29 AV	54	-18.71	-64.89	4.92	-59.97
5	19586.3	43.67 PK	74	-30.33	-56.51	4.92	-51.59
6	19586.3	36.68 AV	54	-17.32	-63.5	4.92	-58.58
7	22450.5	47.65 PK	74	-26.35	-52.53	4.92	-47.61
8	22450.5	36.88 AV	54	-17.12	-63.3	4.92	-58.38
9	38631.11	43.87 PK	74	-30.13	-56.31	4.92	-51.39
10	38631.11	33.22 AV	54	-20.78	-66.96	4.92	-62.04

Note: Margin value = Emission Level - Limit value

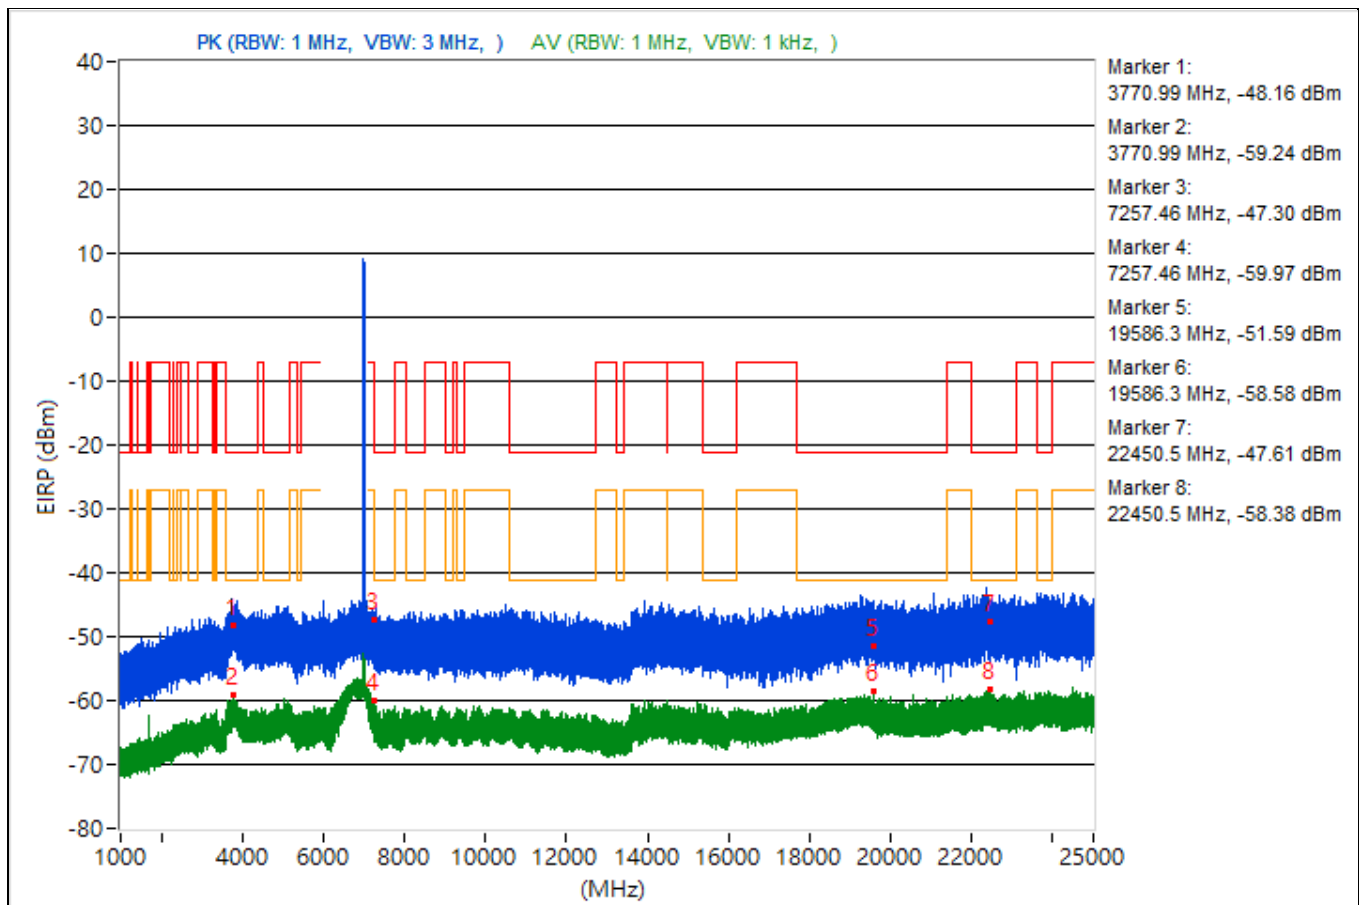


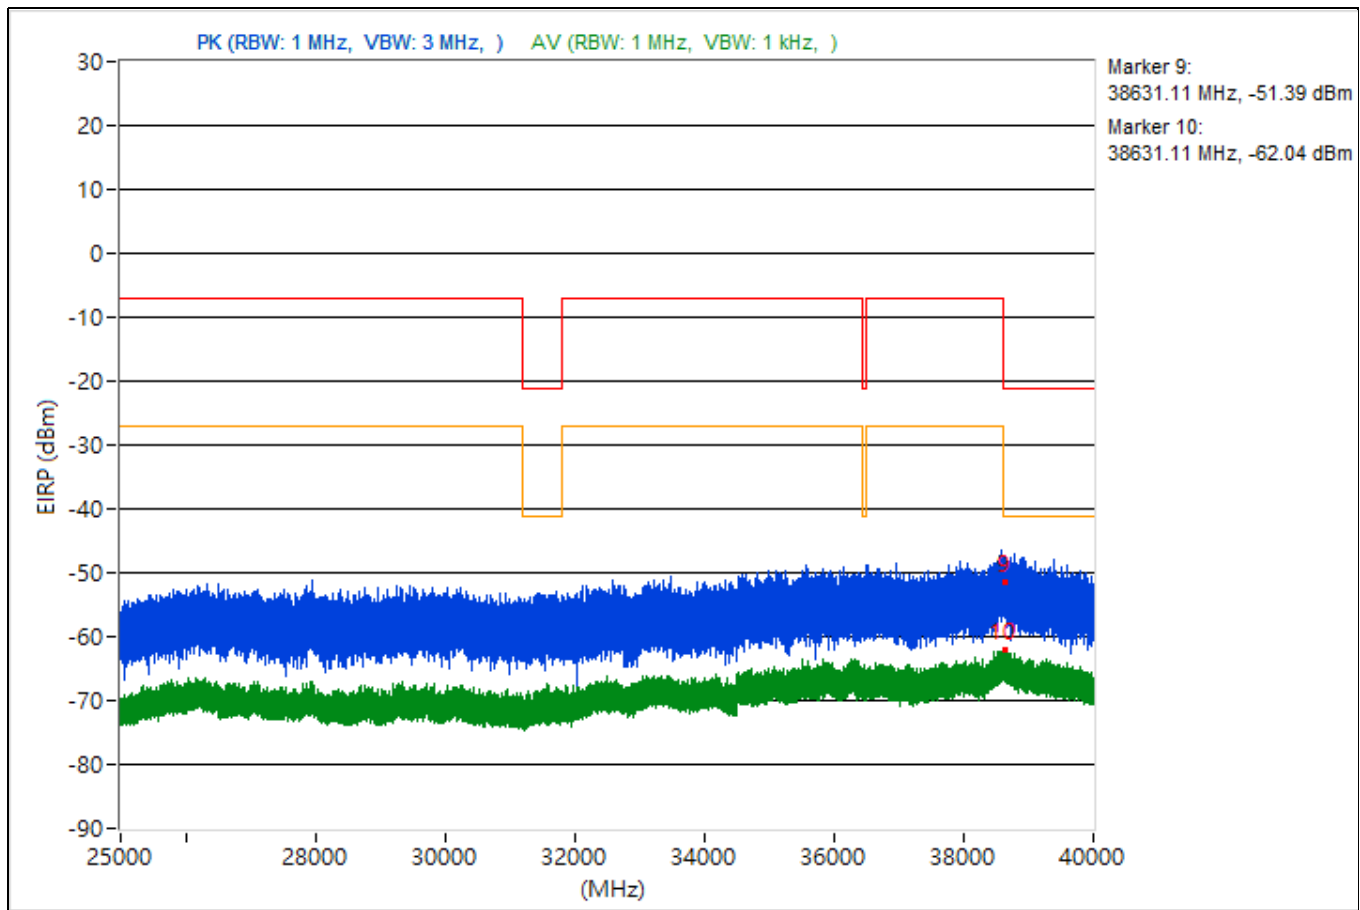


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3745.87	46.86 PK	74	-27.14	-53.32	4.92	-48.4
2	3745.87	36.12 AV	54	-17.88	-64.06	4.92	-59.14
3	7251.62	45.32 PK	74	-28.68	-54.86	4.92	-49.94
4	7251.62	35.24 AV	54	-18.76	-64.94	4.92	-60.02
5	19365.3	48.14 PK	74	-25.86	-52.04	4.92	-47.12
6	19365.3	36.77 AV	54	-17.23	-63.41	4.92	-58.49
7	23903.6	46.42 PK	74	-27.58	-53.76	4.92	-48.84
8	23903.6	37.17 AV	54	-16.83	-63.01	4.92	-58.09
9	38602.58	43.5 PK	74	-30.5	-56.68	4.92	-51.76
10	38602.58	34.05 AV	54	-19.95	-66.13	4.92	-61.21

Note: Margin value = Emission Level - Limit value

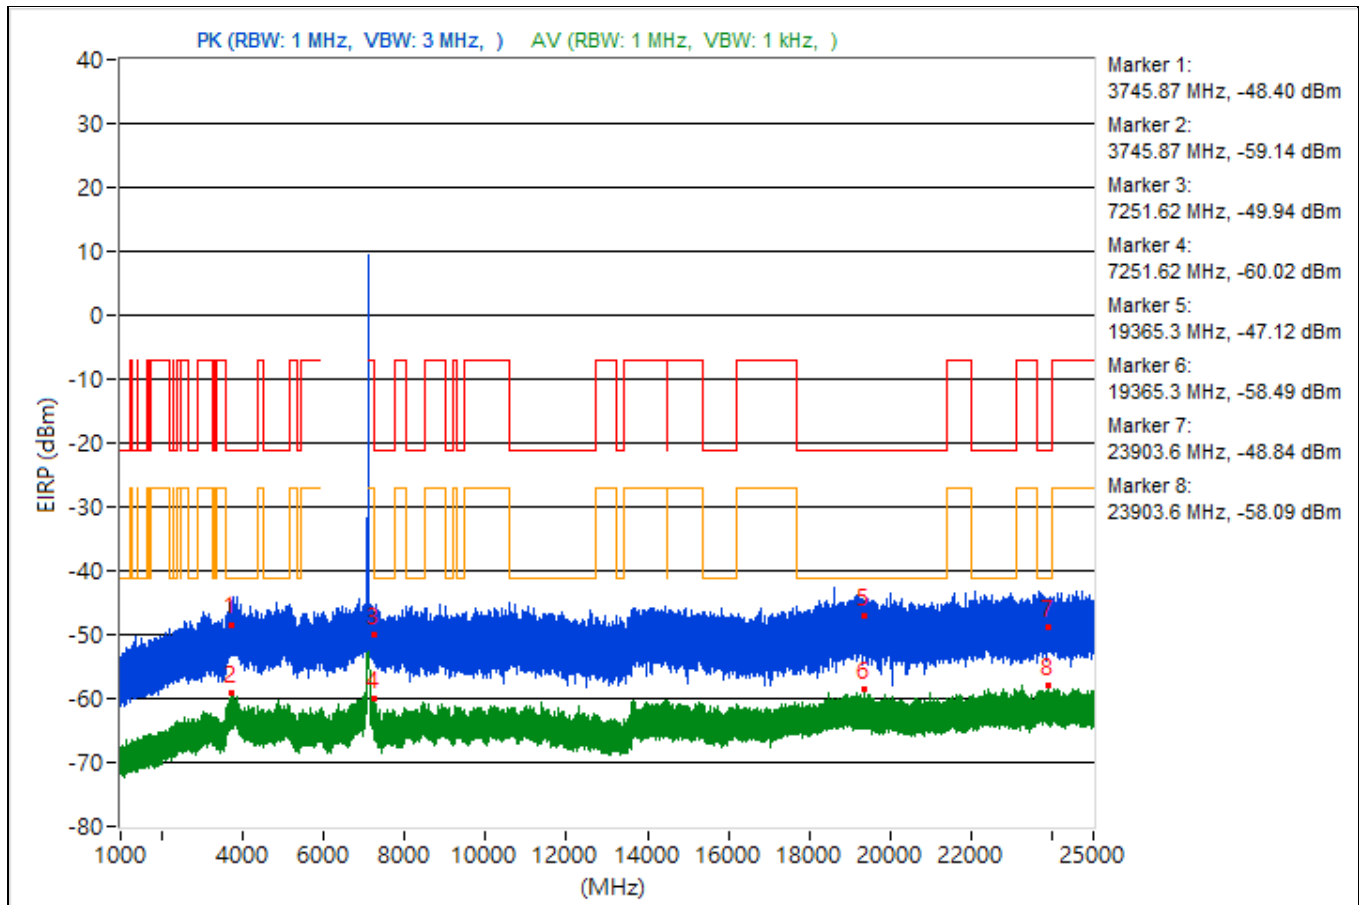


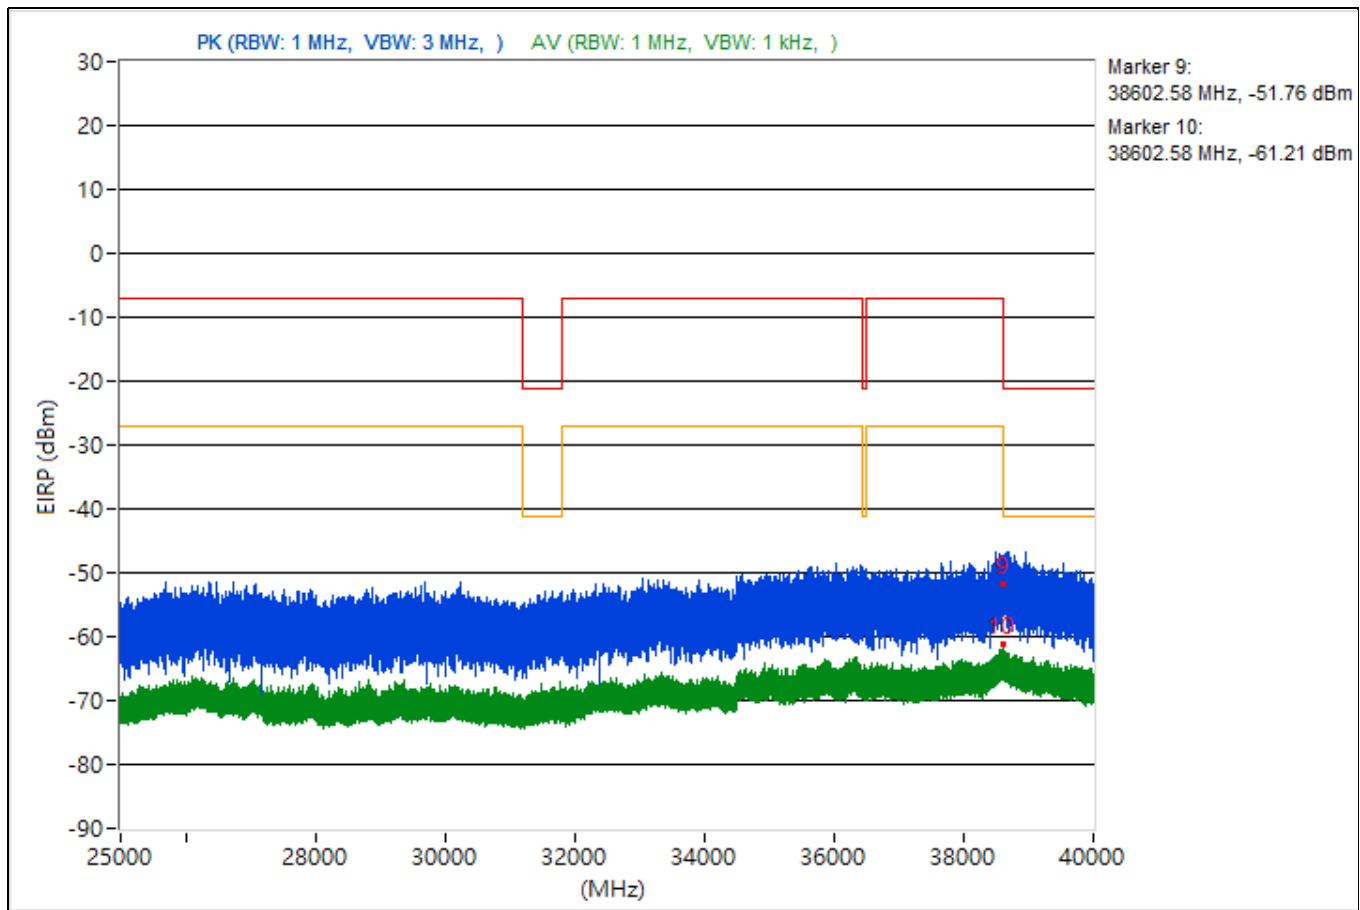


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3698.81	43.84 PK	74	-30.16	-56.34	4.92	-51.42
2	3698.81	36.1 AV	54	-17.9	-64.08	4.92	-59.16
3	14486.04	49.41 PK	74	-24.59	-50.77	4.92	-45.85
4	14486.04	34.62 AV	54	-19.38	-65.56	4.92	-60.64
5	19176.7	46.77 PK	74	-27.23	-53.41	4.92	-48.49
6	19176.7	35.9 AV	54	-18.1	-64.28	4.92	-59.36
7	22184.8	45.65 PK	74	-28.35	-54.53	4.92	-49.61
8	22184.8	37.16 AV	54	-16.84	-63.02	4.92	-58.1
9	38625.51	45.03 PK	74	-28.97	-55.15	4.92	-50.23
10	38625.51	33.32 AV	54	-20.68	-66.86	4.92	-61.94

Note: Margin value = Emission Level - Limit value

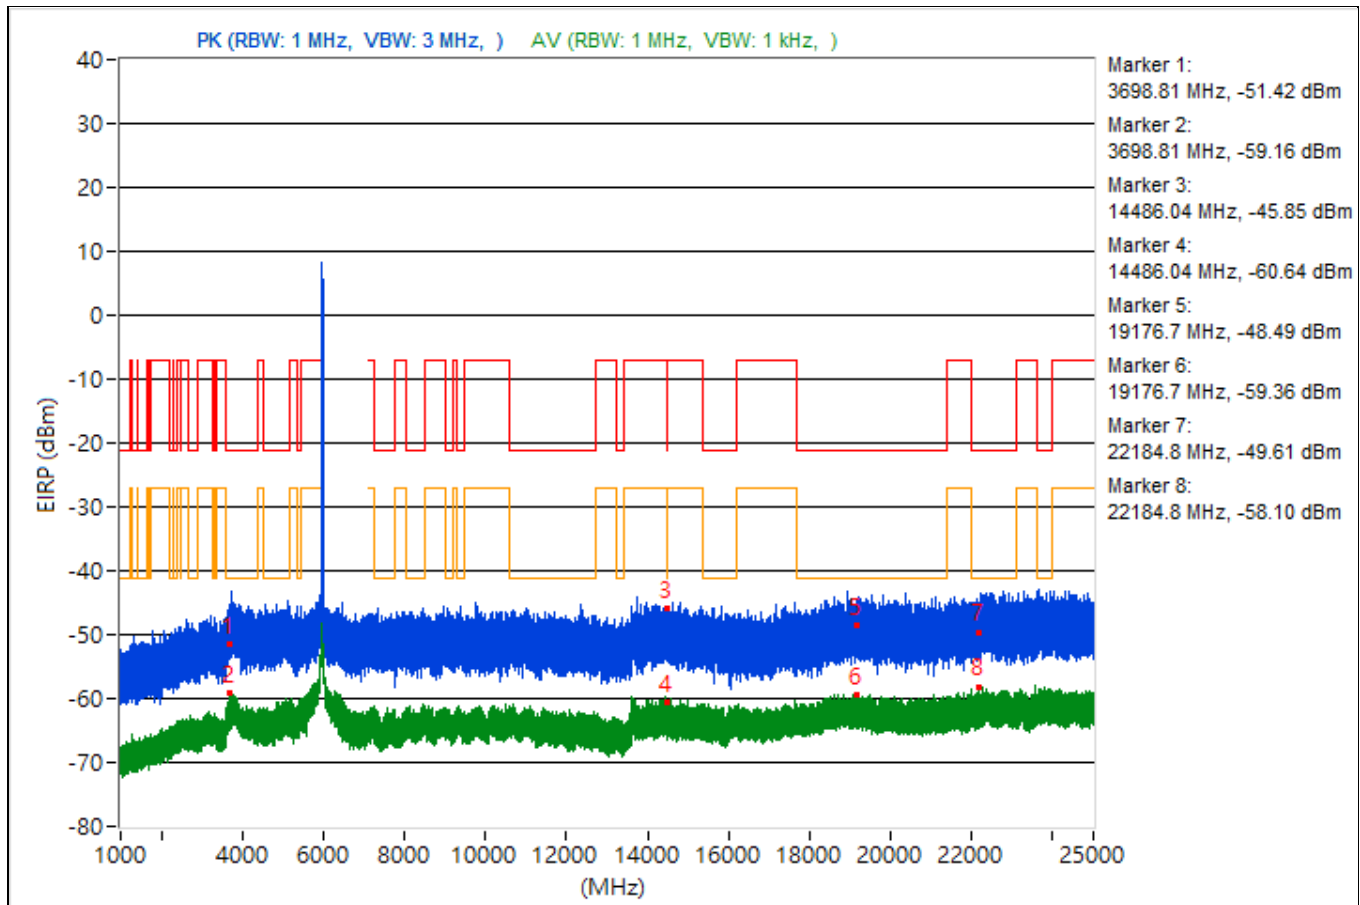


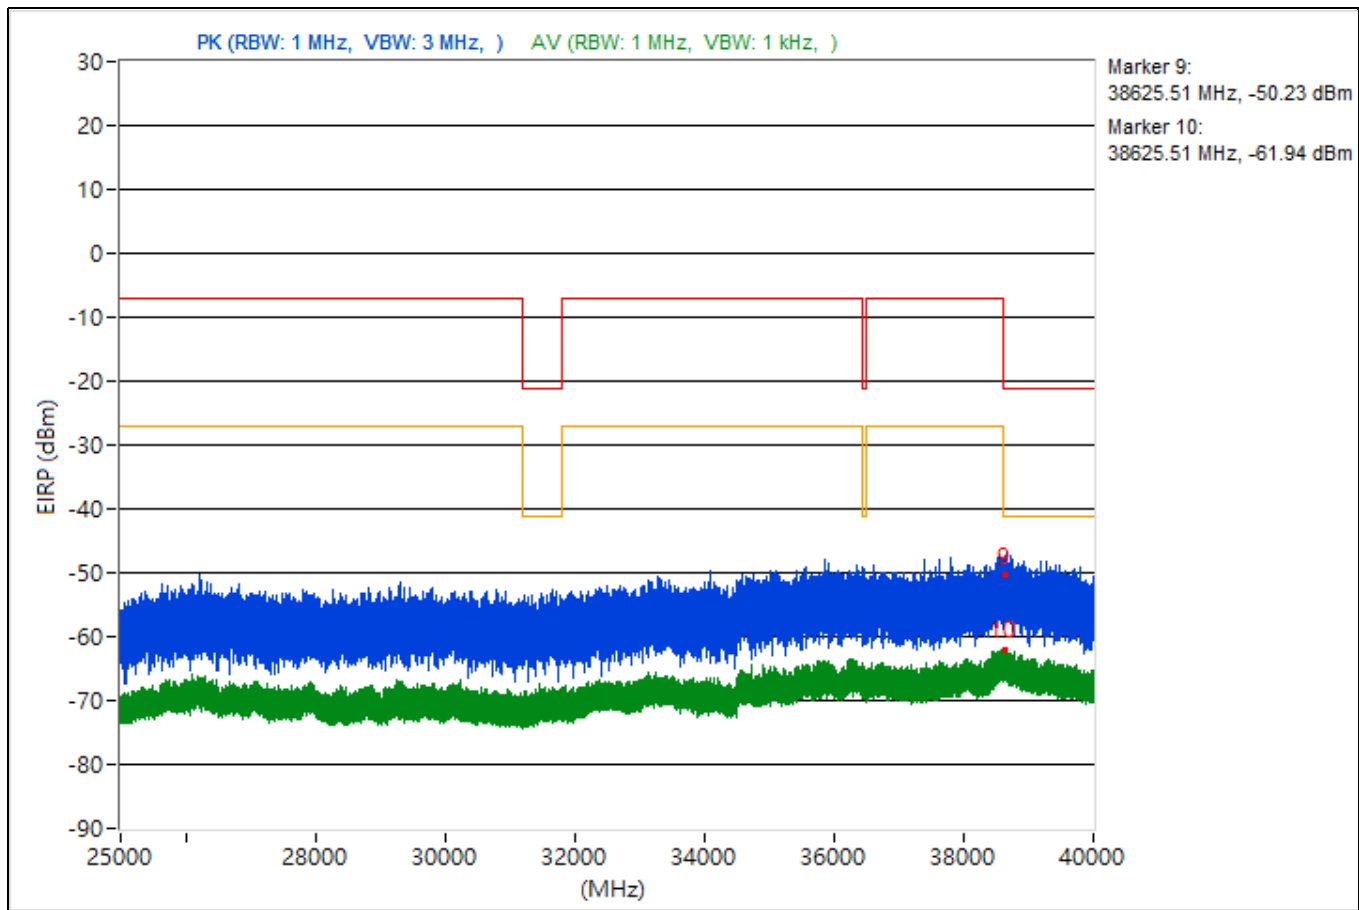


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4847.98	47.44 PK	74	-26.56	-52.74	4.92	-47.82
2	4847.98	35.74 AV	54	-18.26	-64.44	4.92	-59.52
3	15382.93	46.6 PK	74	-27.4	-53.58	4.92	-48.66
4	15382.93	34.72 AV	54	-19.28	-65.46	4.92	-60.54
5	19175.5	45.95 PK	74	-28.05	-54.23	4.92	-49.31
6	19175.5	36.56 AV	54	-17.44	-63.62	4.92	-58.7
7	22767.3	43.84 PK	74	-30.16	-56.34	4.92	-51.42
8	22767.3	36.64 AV	54	-17.36	-63.54	4.92	-58.62
9	38700	46.49 PK	74	-27.51	-53.69	4.92	-48.77
10	38700	33.9 AV	54	-20.1	-66.28	4.92	-61.36

Note: Margin value = Emission Level - Limit value

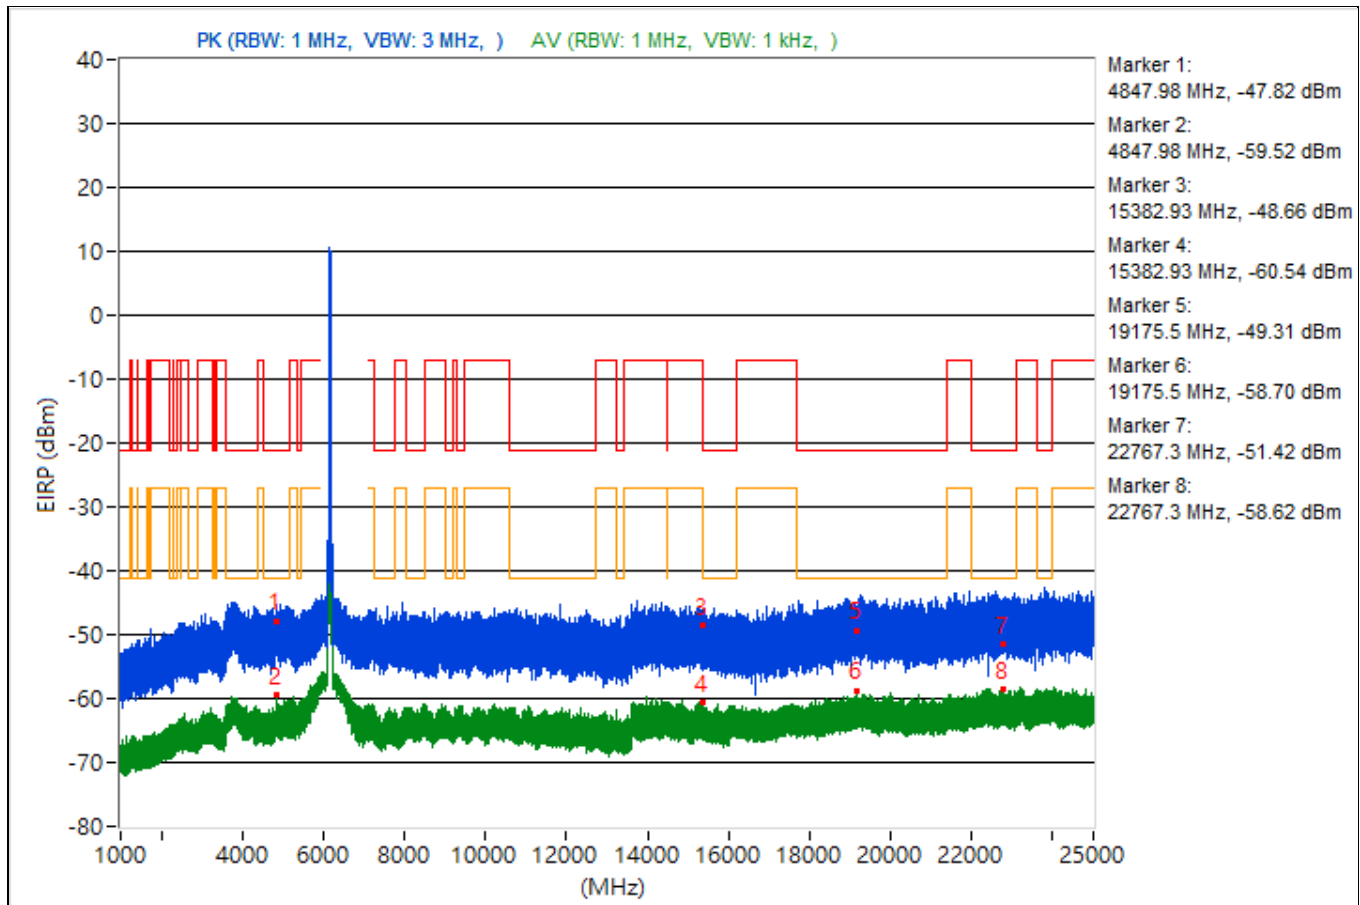


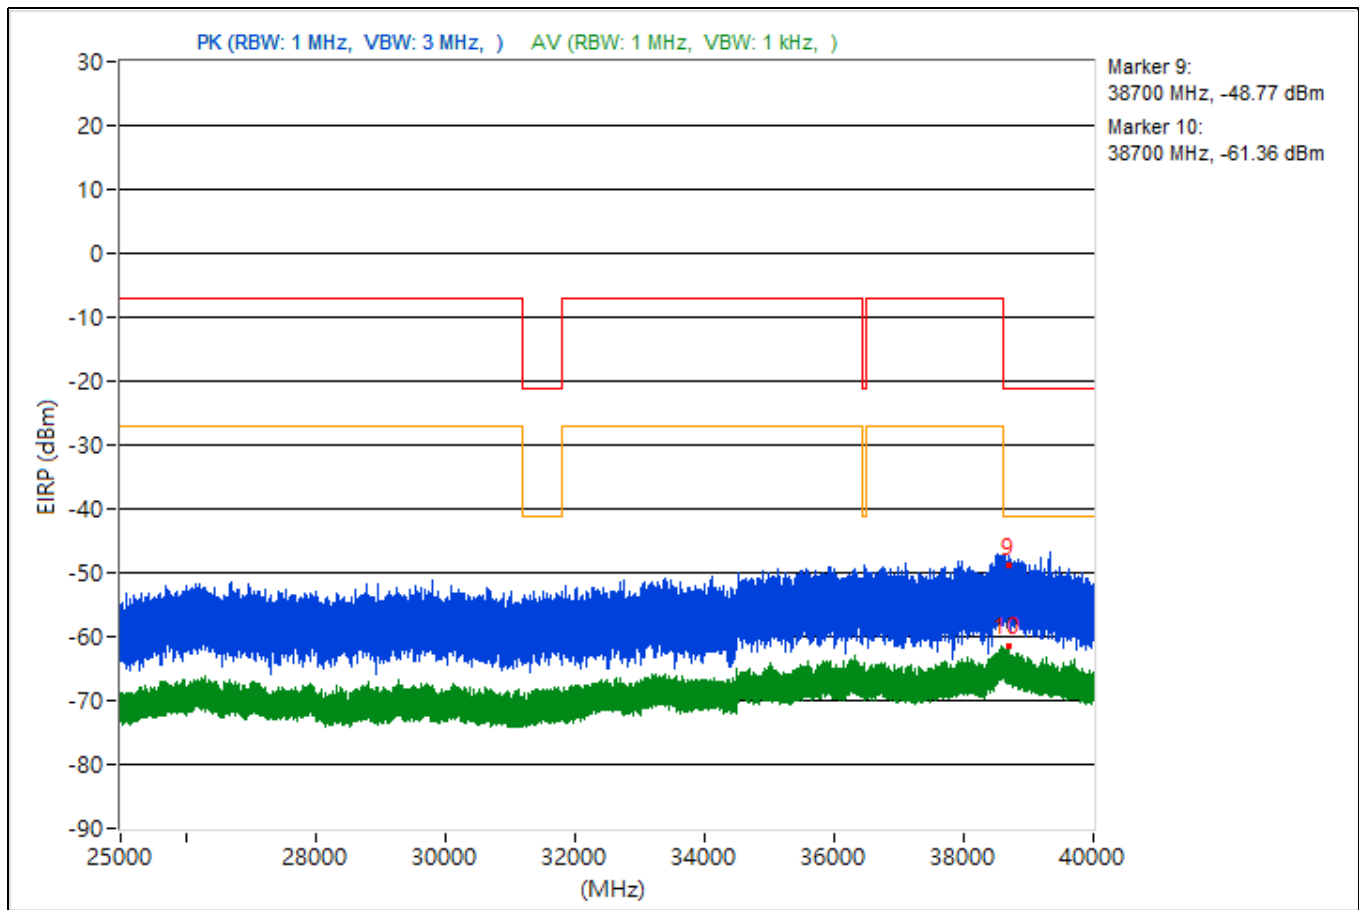


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3766.32	47.92 PK	74	-26.08	-52.26	4.92	-47.34
2	3766.32	35.96 AV	54	-18.04	-64.22	4.92	-59.3
3	14481.42	44.51 PK	74	-29.49	-55.67	4.92	-50.75
4	14481.42	34.67 AV	54	-19.33	-65.51	4.92	-60.59
5	18913.2	43.23 PK	74	-30.77	-56.95	4.92	-52.03
6	18913.2	36.15 AV	54	-17.85	-64.03	4.92	-59.11
7	23789.6	47.86 PK	74	-26.14	-52.32	4.92	-47.4
8	23789.6	37.09 AV	54	-16.91	-63.09	4.92	-58.17
9	38613.07	48.04 PK	74	-25.96	-52.14	4.92	-47.22
10	38613.07	33.41 AV	54	-20.59	-66.77	4.92	-61.85

Note: Margin value = Emission Level - Limit value

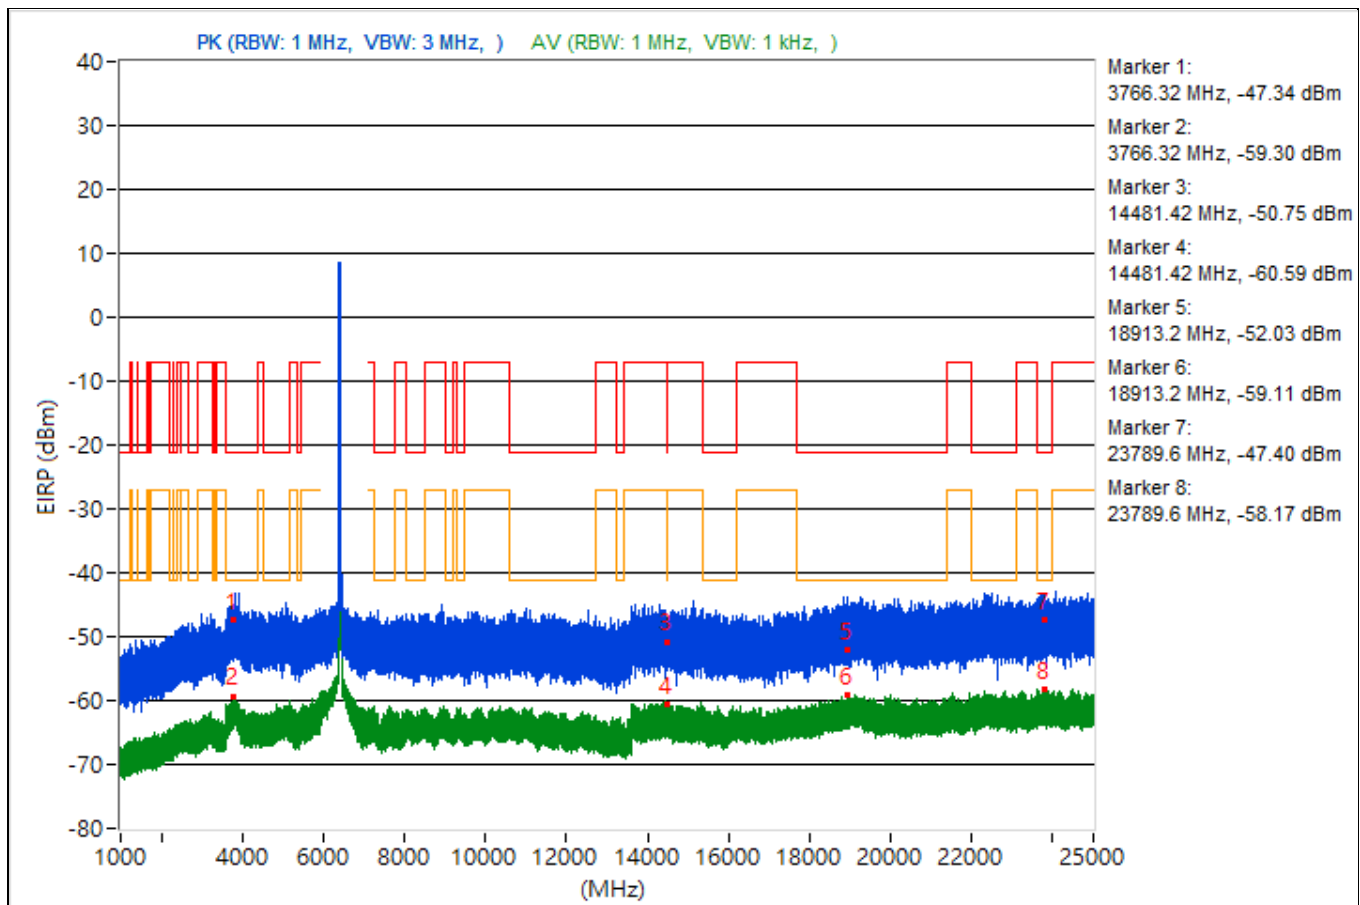


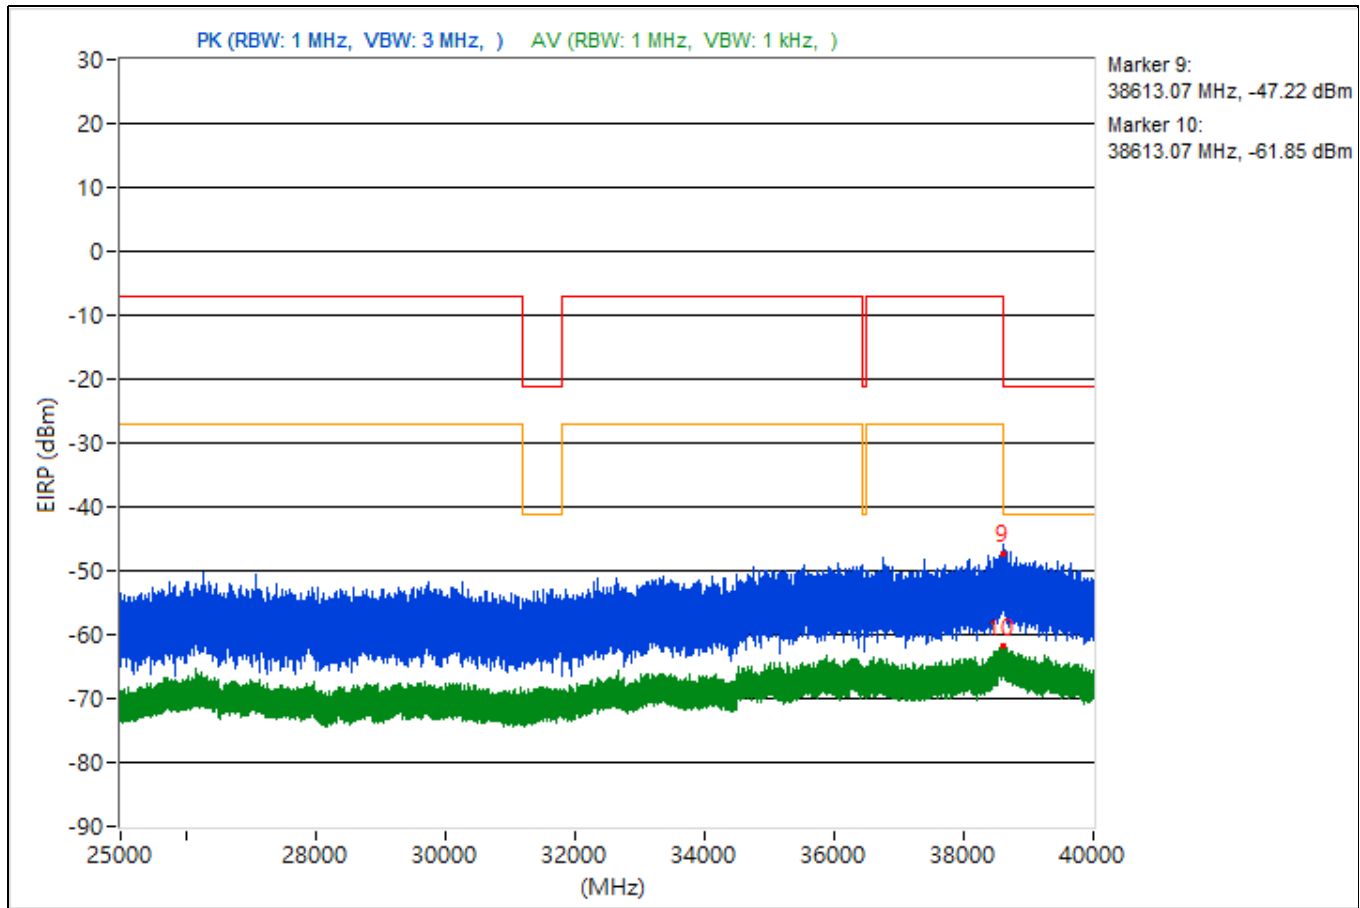


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3751.78	45.76 PK	74	-28.24	-54.42	4.92	-49.5
2	3751.78	35.91 AV	54	-18.09	-64.27	4.92	-59.35
3	14475.91	45.68 PK	74	-28.32	-54.5	4.92	-49.58
4	14475.91	34.63 AV	54	-19.37	-65.55	4.92	-60.63
5	19210.1	45.35 PK	74	-28.65	-54.83	4.92	-49.91
6	19210.1	35.79 AV	54	-18.21	-64.39	4.92	-59.47
7	22344.2	49.16 PK	74	-24.84	-51.02	4.92	-46.1
8	22344.2	37.22 AV	54	-16.78	-62.96	4.92	-58.04
9	38637.33	43.64 PK	74	-30.36	-56.54	4.92	-51.62
10	38637.33	33.11 AV	54	-20.89	-67.07	4.92	-62.15

Note: Margin value = Emission Level - Limit value

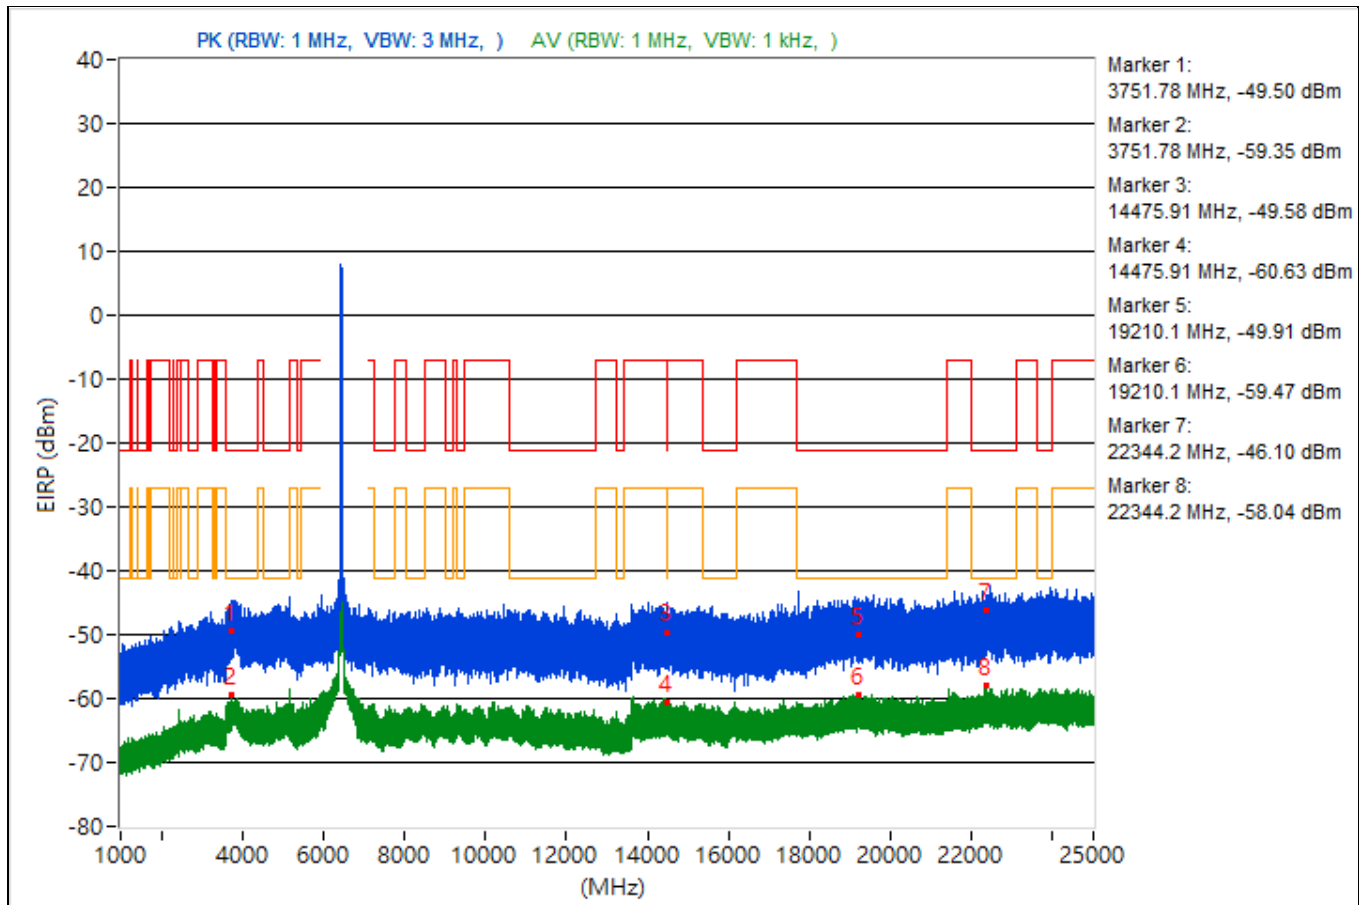


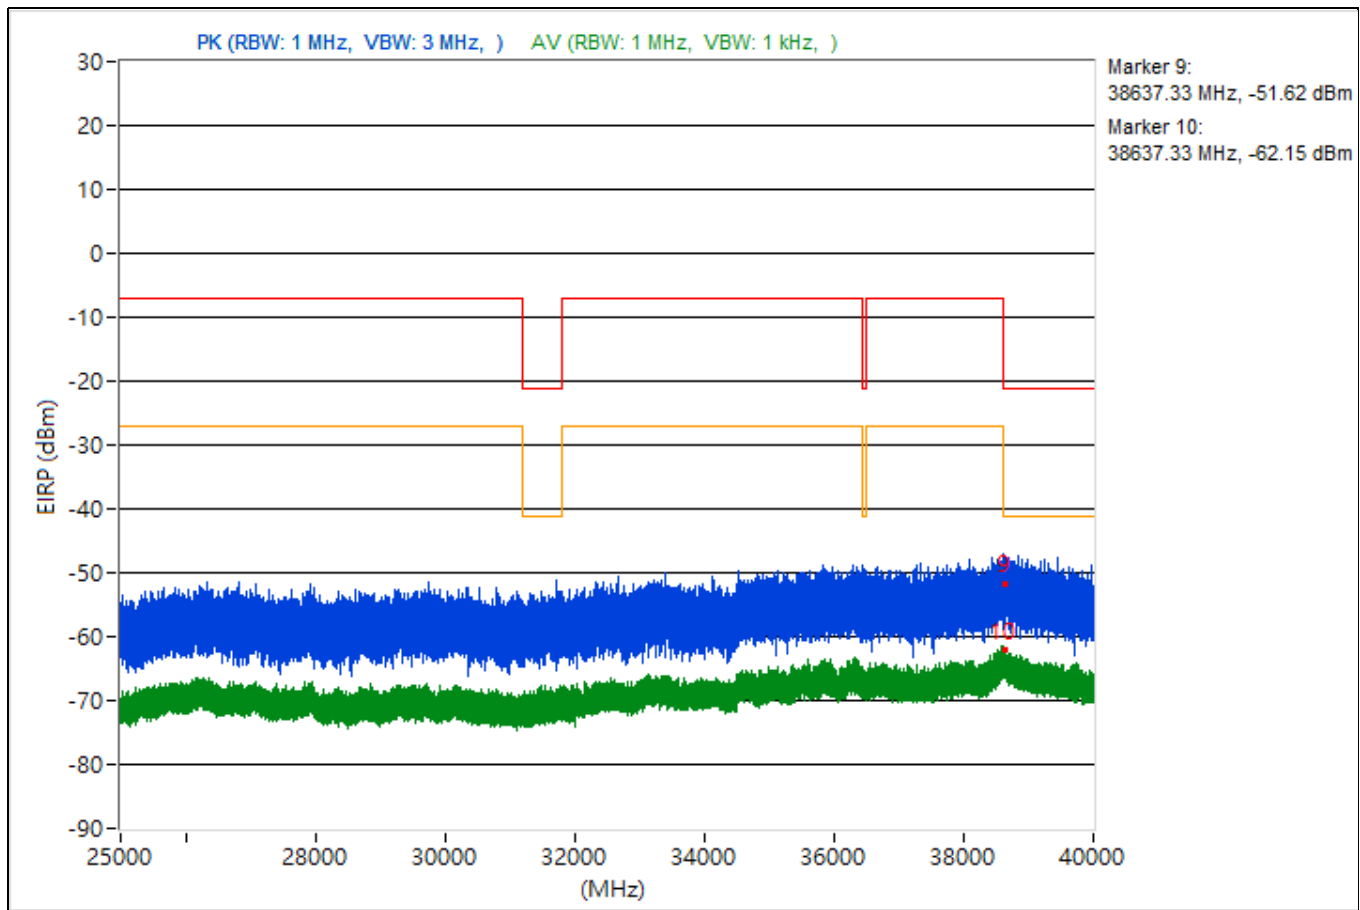


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.03	47.26 PK	74	-26.74	-52.92	4.92	-48
2	3803.03	35.57 AV	54	-18.43	-64.61	4.92	-59.69
3	14478.04	47.34 PK	74	-26.66	-52.84	4.92	-47.92
4	14478.04	34.97 AV	54	-19.03	-65.21	4.92	-60.29
5	20131.7	44.91 PK	74	-29.09	-55.27	4.92	-50.35
6	20131.7	36.59 AV	54	-17.41	-63.59	4.92	-58.67
7	23998.3	50.4 PK	74	-23.6	-49.78	4.92	-44.86
8	23998.3	37.22 AV	54	-16.78	-62.96	4.92	-58.04
9	38659.11	43.91 PK	74	-30.09	-56.27	4.92	-51.35
10	38659.11	33.38 AV	54	-20.62	-66.8	4.92	-61.88

Note: Margin value = Emission Level - Limit value

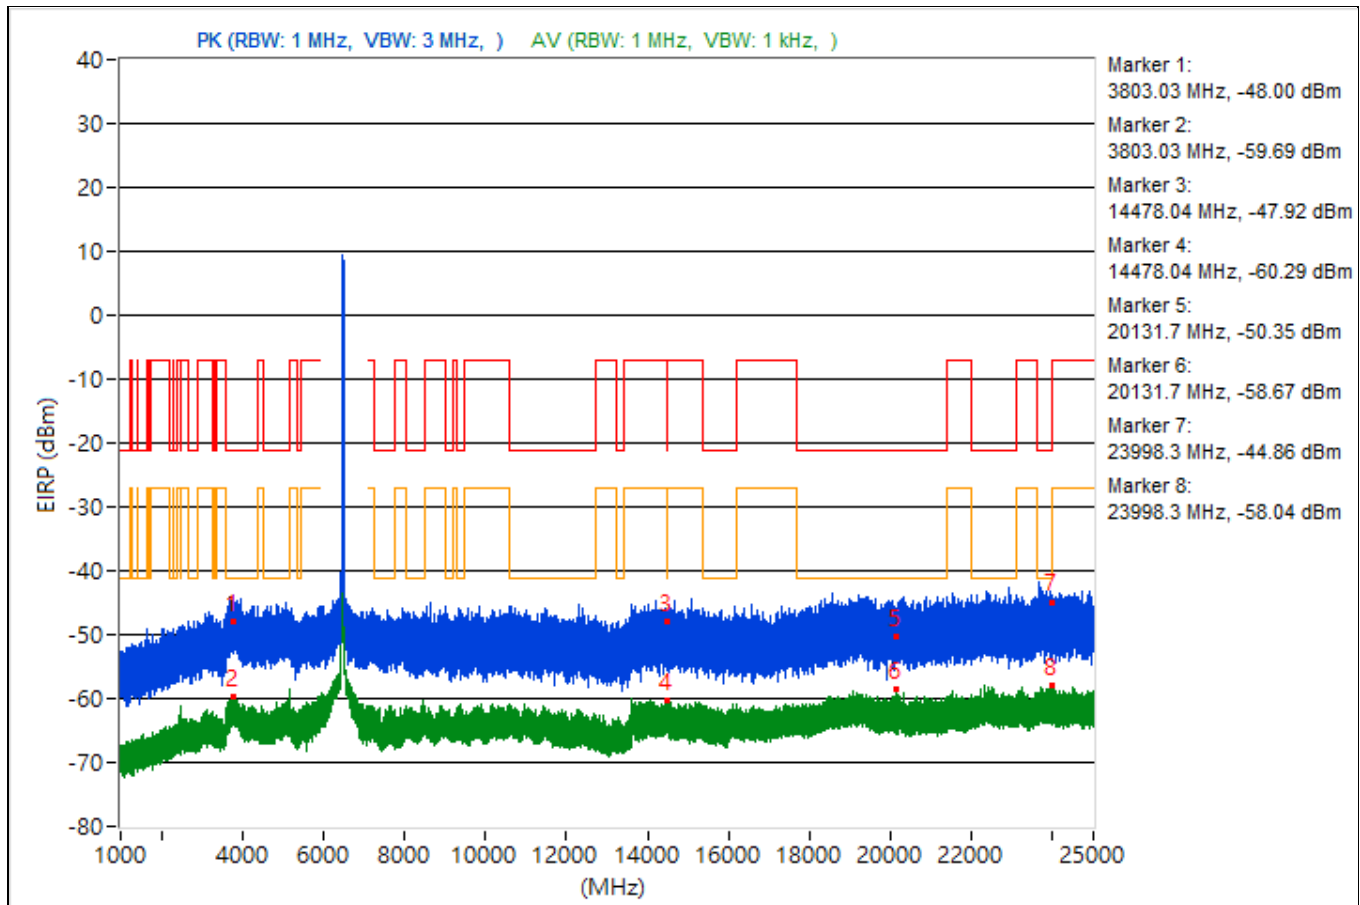


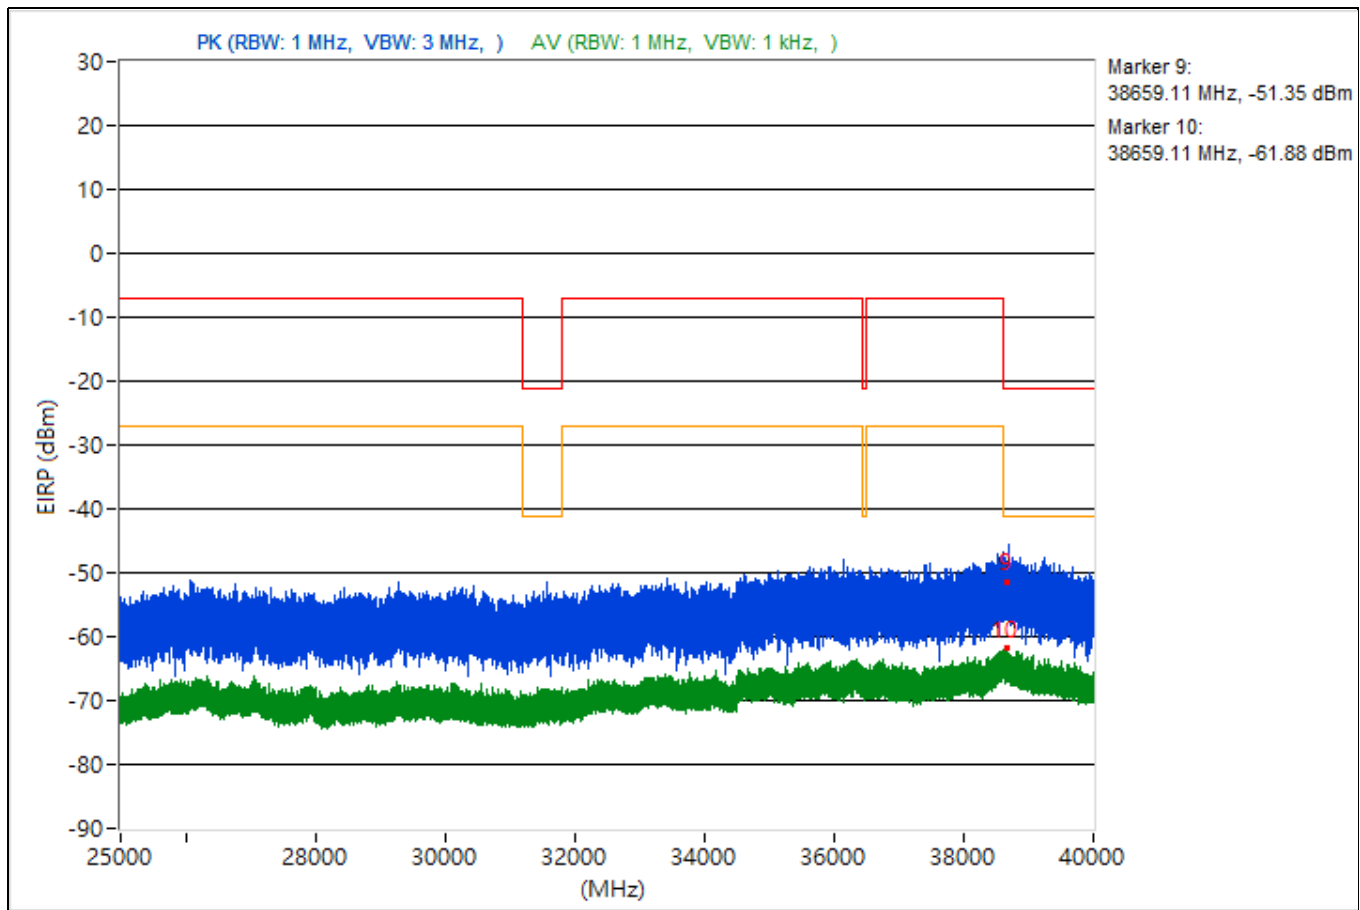


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.92	45.74 PK	74	-28.26	-54.44	4.92	-49.52
2	3785.92	36.06 AV	54	-17.94	-64.12	4.92	-59.2
3	15392.53	45.04 PK	74	-28.96	-55.14	4.92	-50.22
4	15392.53	34.94 AV	54	-19.06	-65.24	4.92	-60.32
5	19045.5	45.5 PK	74	-28.5	-54.68	4.92	-49.76
6	19045.5	36.15 AV	54	-17.85	-64.03	4.92	-59.11
7	23847.2	43.81 PK	74	-30.19	-56.37	4.92	-51.45
8	23847.2	37.14 AV	54	-16.86	-63.04	4.92	-58.12
9	38619.64	43.34 PK	74	-30.66	-56.84	4.92	-51.92
10	38619.64	33.6 AV	54	-20.4	-66.58	4.92	-61.66

Note: Margin value = Emission Level - Limit value

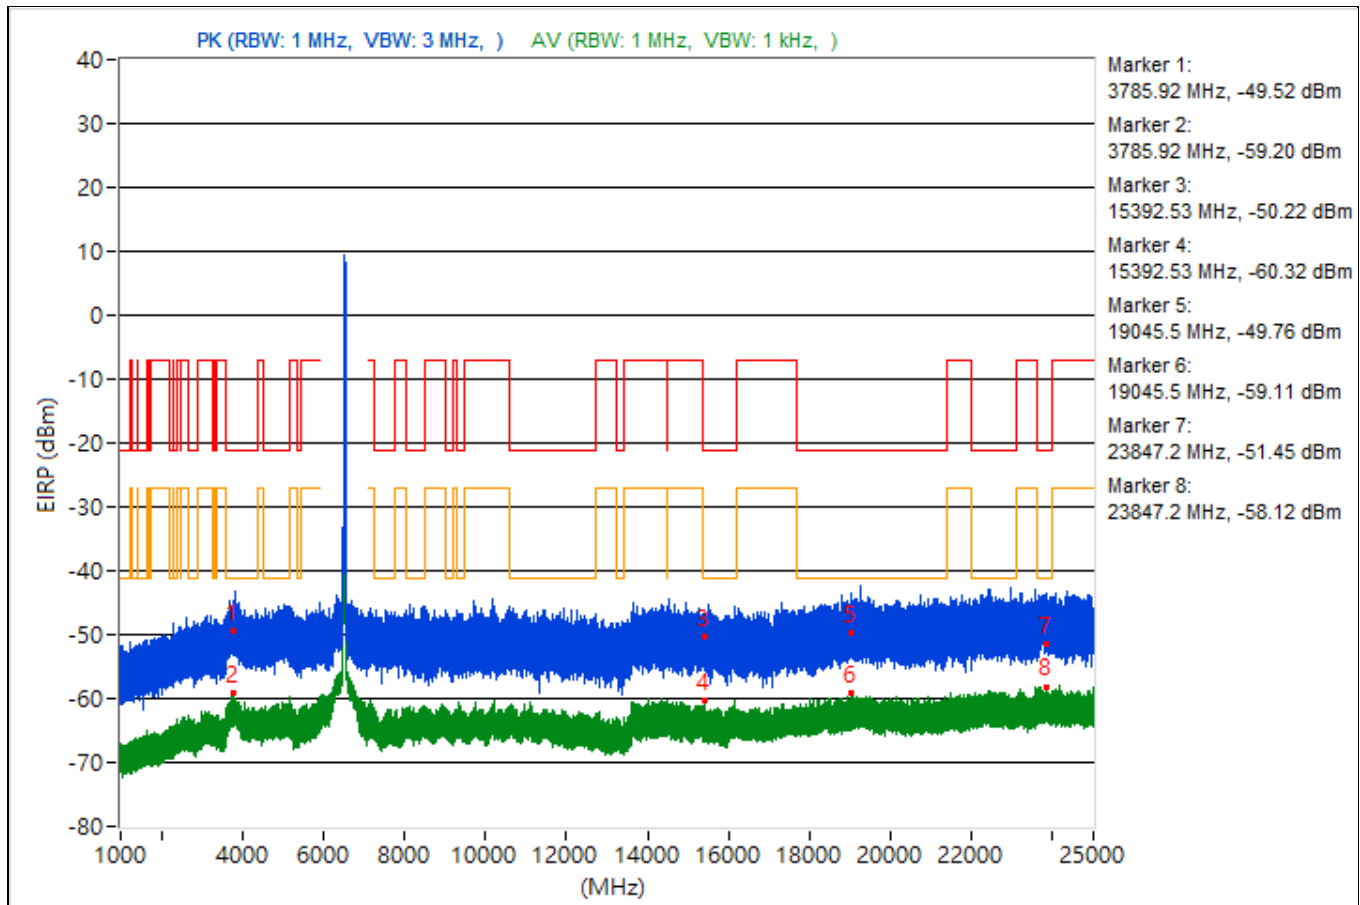


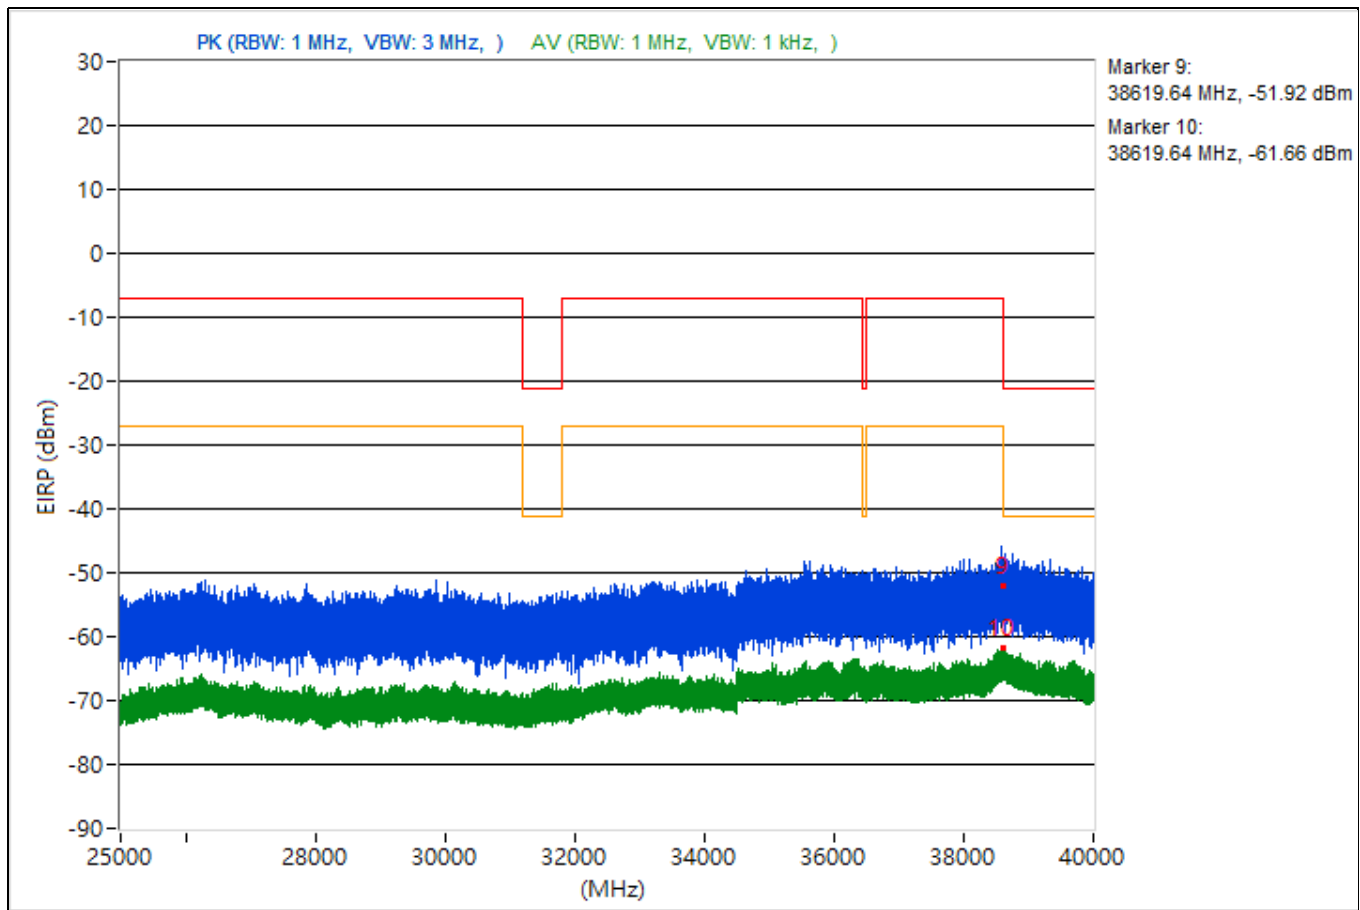


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.83	45.29 PK	74	-28.71	-54.89	4.92	-49.97
2	3791.83	35.52 AV	54	-18.48	-64.66	4.92	-59.74
3	14496.09	44.43 PK	74	-29.57	-55.75	4.92	-50.83
4	14496.09	34.89 AV	54	-19.11	-65.29	4.92	-60.37
5	19184.2	47.92 PK	74	-26.08	-52.26	4.92	-47.34
6	19184.2	36.31 AV	54	-17.69	-63.87	4.92	-58.95
7	23644.5	49.13 PK	74	-24.87	-51.05	4.92	-46.13
8	23644.5	37.54 AV	54	-16.46	-62.64	4.92	-57.72
9	38617.87	46.24 PK	74	-27.76	-53.94	4.92	-49.02
10	38617.87	33.66 AV	54	-20.34	-66.52	4.92	-61.6

Note: Margin value = Emission Level - Limit value

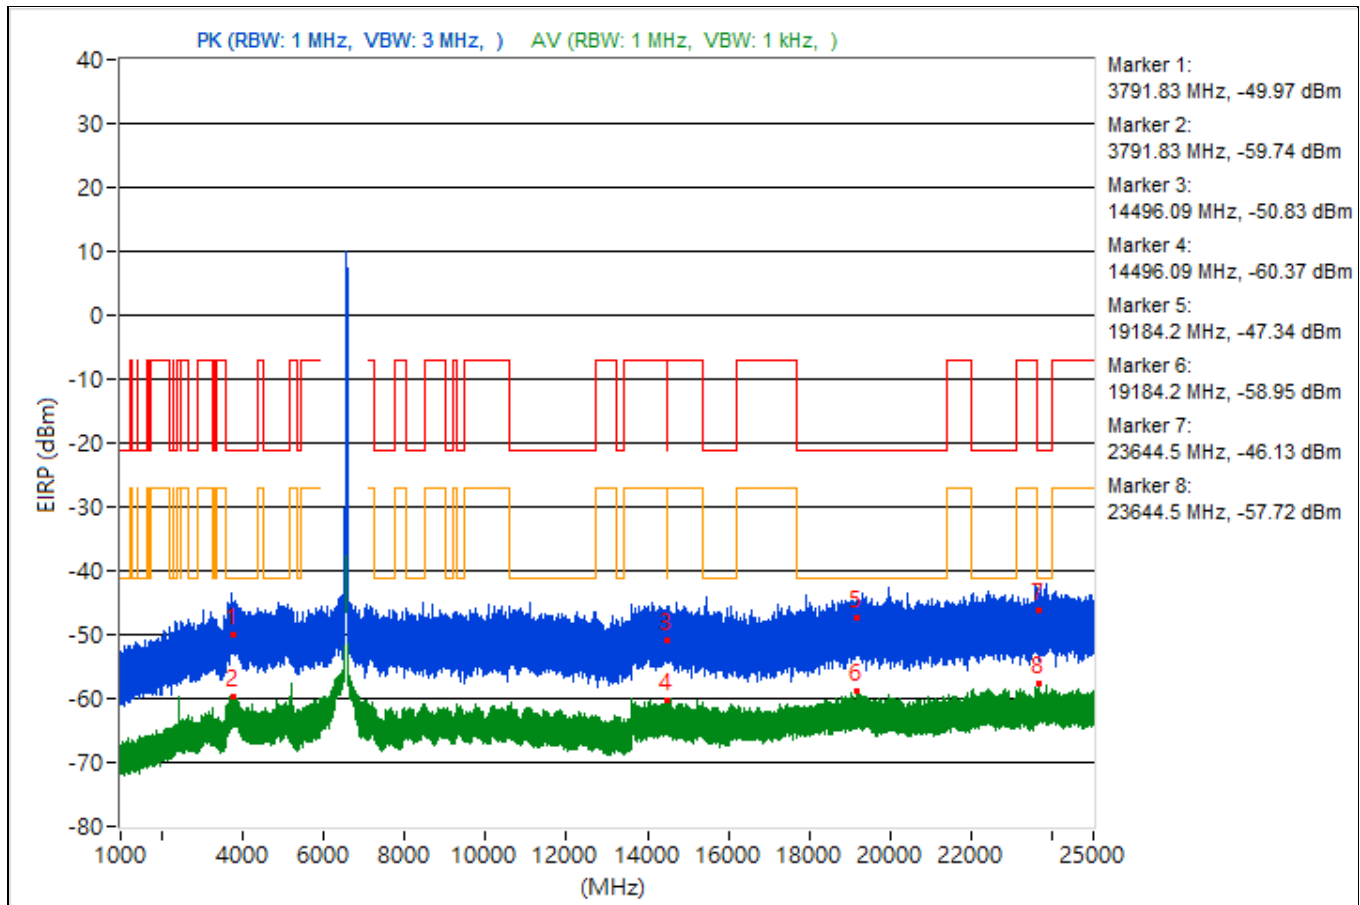


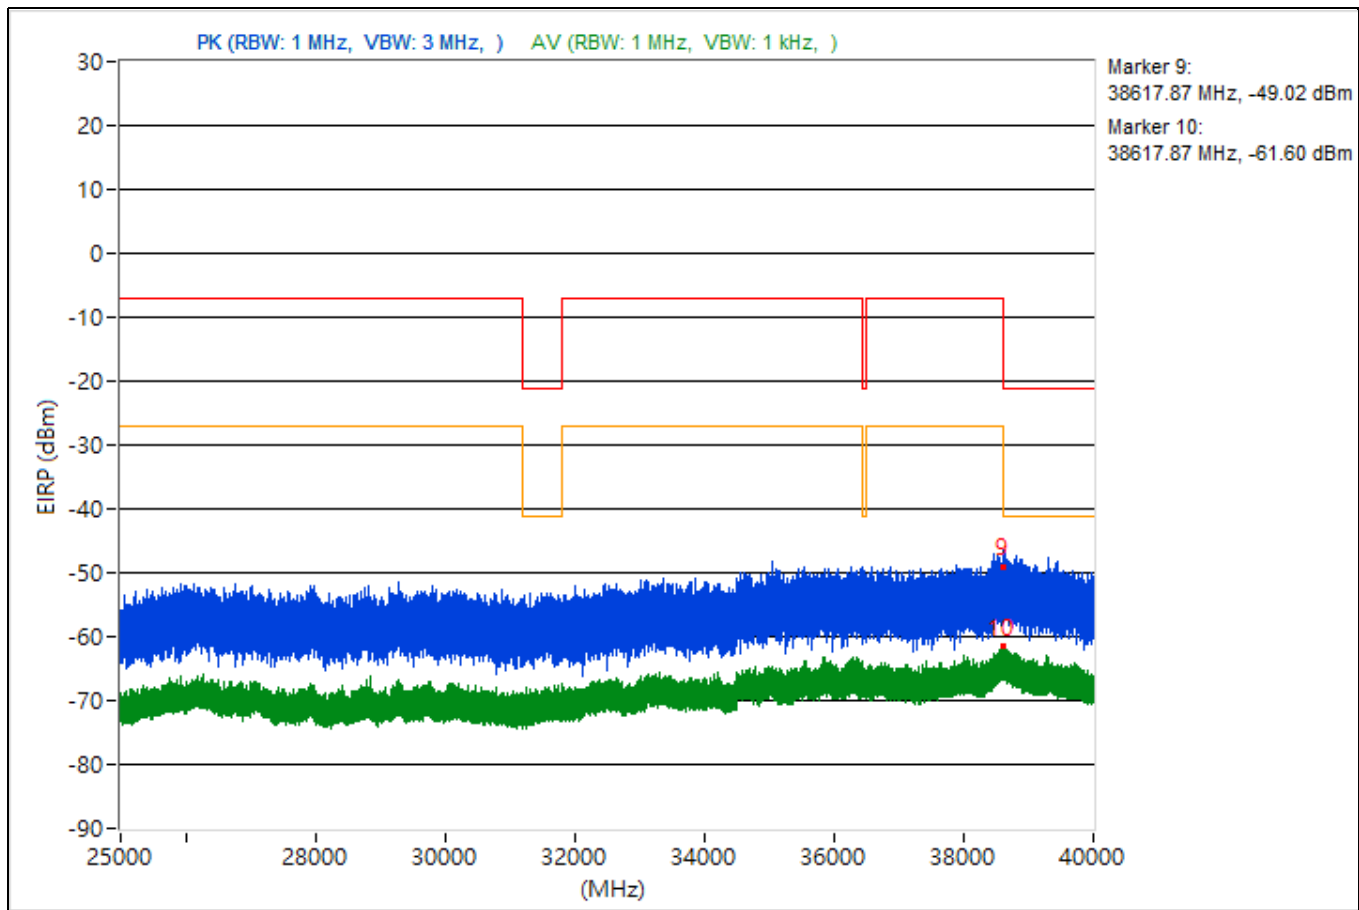


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.91	43.8 PK	74	-30.2	-56.38	4.92	-51.46
2	3777.91	35.82 AV	54	-18.18	-64.36	4.92	-59.44
3	14489.51	40.64 PK	74	-33.36	-59.54	4.92	-54.62
4	14489.51	35.01 AV	54	-18.99	-65.17	4.92	-60.25
5	21025.8	43.55 PK	74	-30.45	-56.63	4.92	-51.71
6	21025.8	36.14 AV	54	-17.86	-64.04	4.92	-59.12
7	23913.6	45.83 PK	74	-28.17	-54.35	4.92	-49.43
8	23913.6	37.06 AV	54	-16.94	-63.12	4.92	-58.2
9	38609.87	43.28 PK	74	-30.72	-56.9	4.92	-51.98
10	38609.87	33.88 AV	54	-20.12	-66.3	4.92	-61.38

Note: Margin value = Emission Level - Limit value

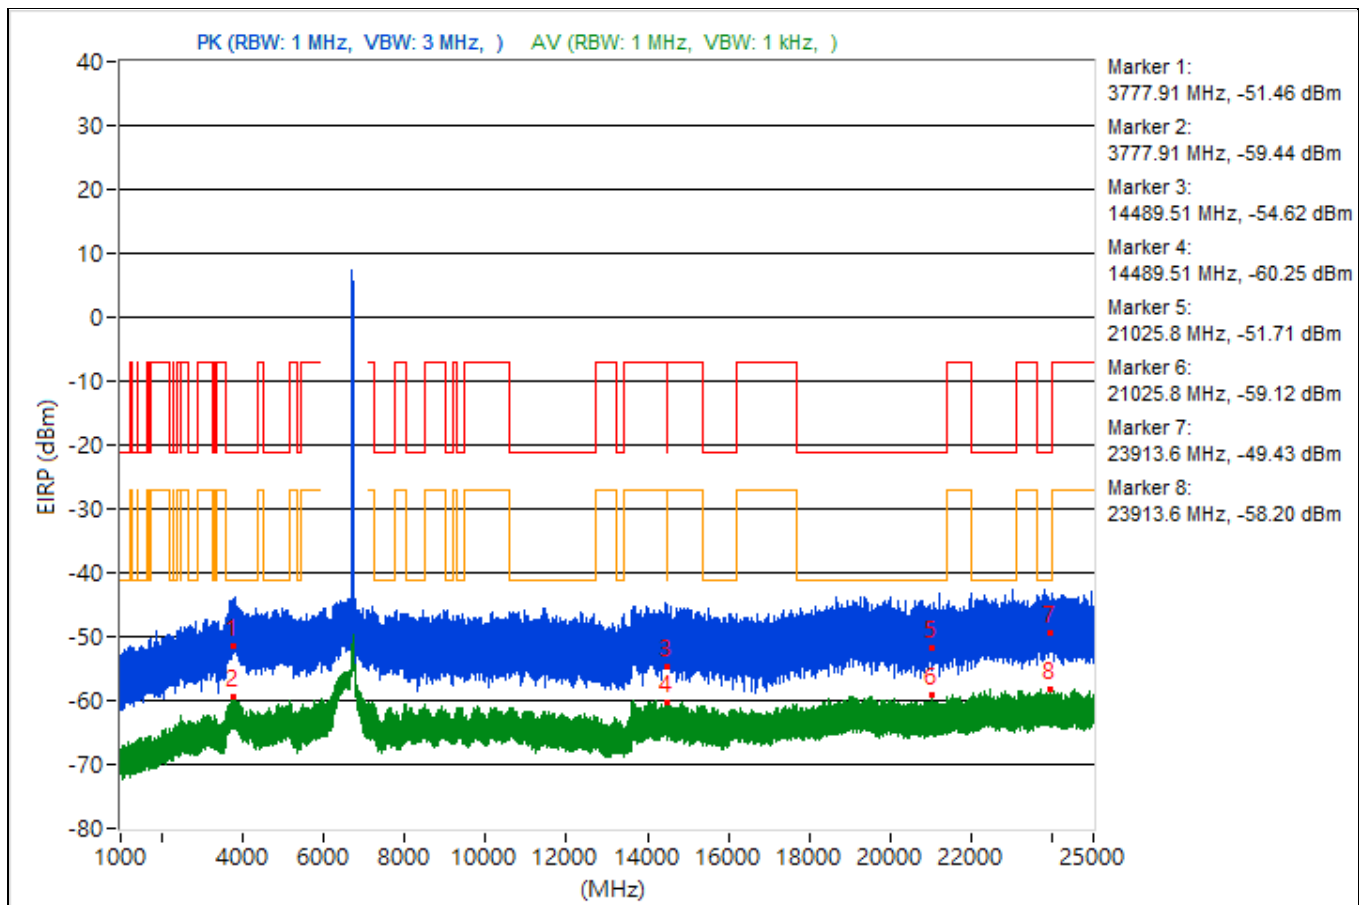


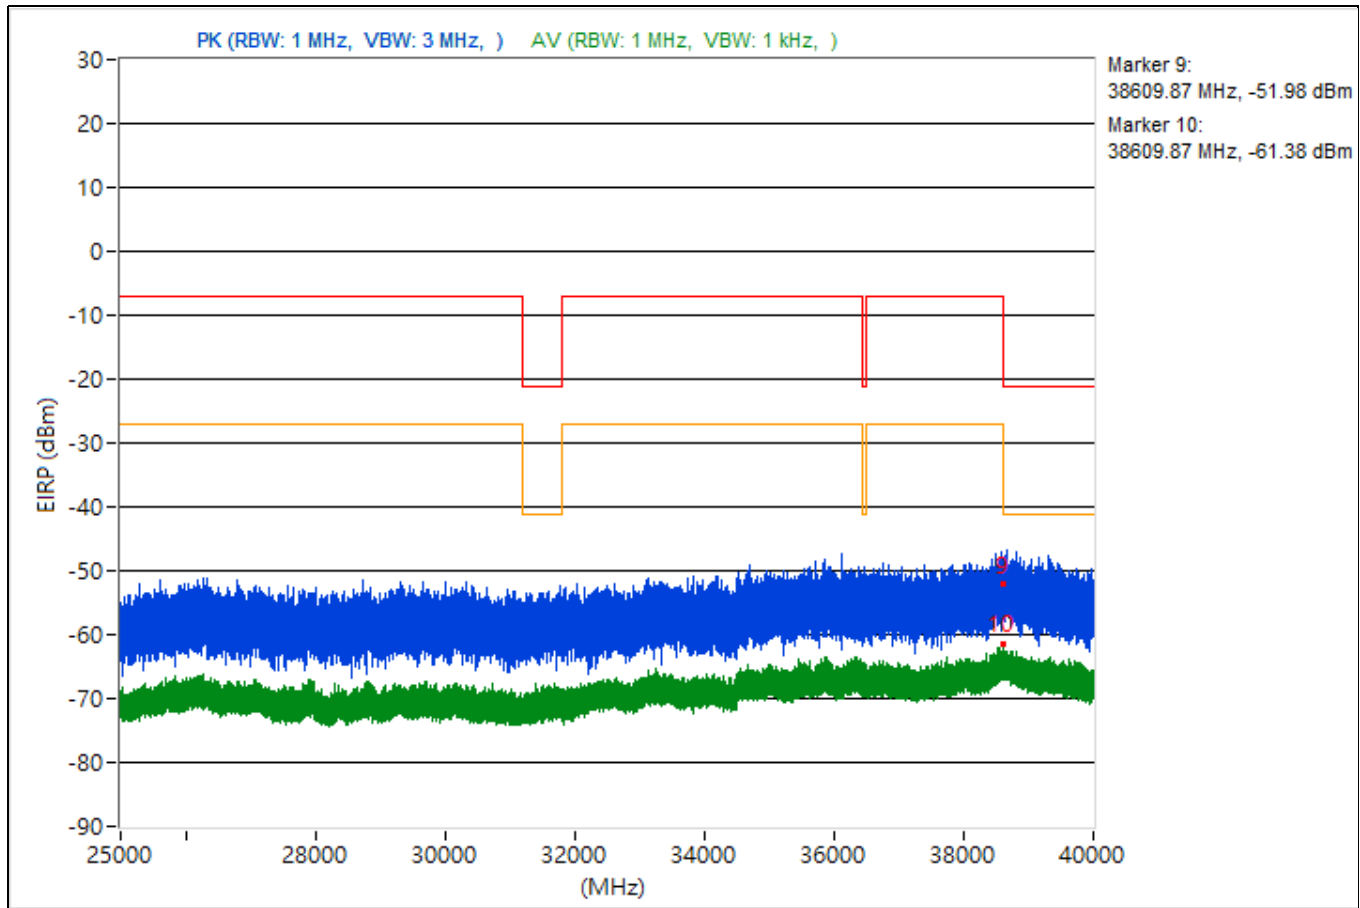


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.36	46.36 PK	74	-27.64	-53.82	4.92	-48.9
2	3790.36	36.38 AV	54	-17.62	-63.8	4.92	-58.88
3	7288.41	46.63 PK	74	-27.37	-53.55	4.92	-48.63
4	7288.41	35.4 AV	54	-18.6	-64.78	4.92	-59.86
5	18980.7	42.83 PK	74	-31.17	-57.35	4.92	-52.43
6	18980.7	36.26 AV	54	-17.74	-63.92	4.92	-59
7	22405.5	47.2 PK	74	-26.8	-52.98	4.92	-48.06
8	22405.5	37.03 AV	54	-16.97	-63.15	4.92	-58.23
9	38701.69	41.25 PK	74	-32.75	-58.93	4.92	-54.01
10	38701.69	33.4 AV	54	-20.6	-66.78	4.92	-61.86

Note: Margin value = Emission Level - Limit value

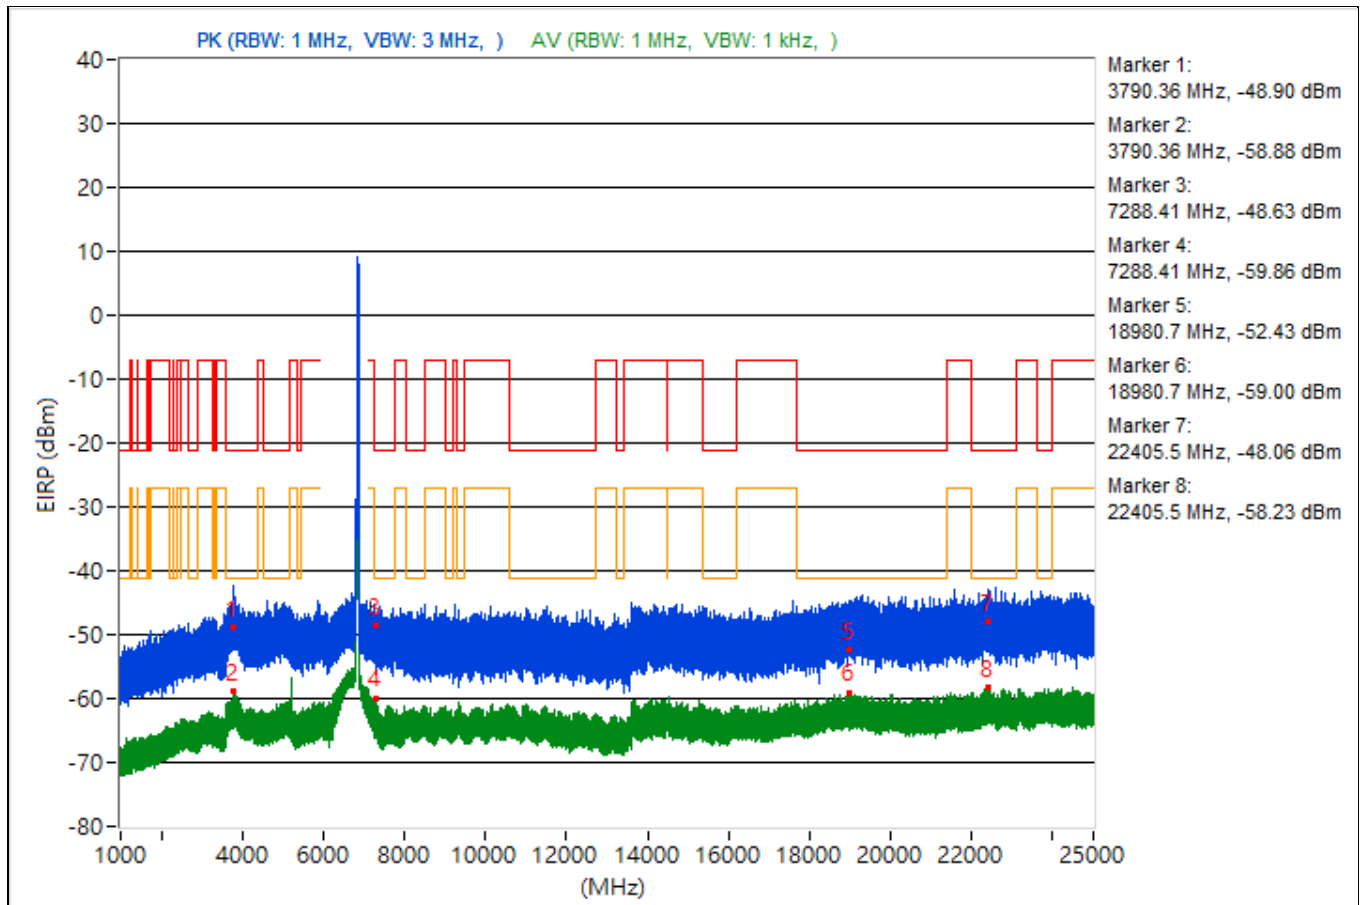


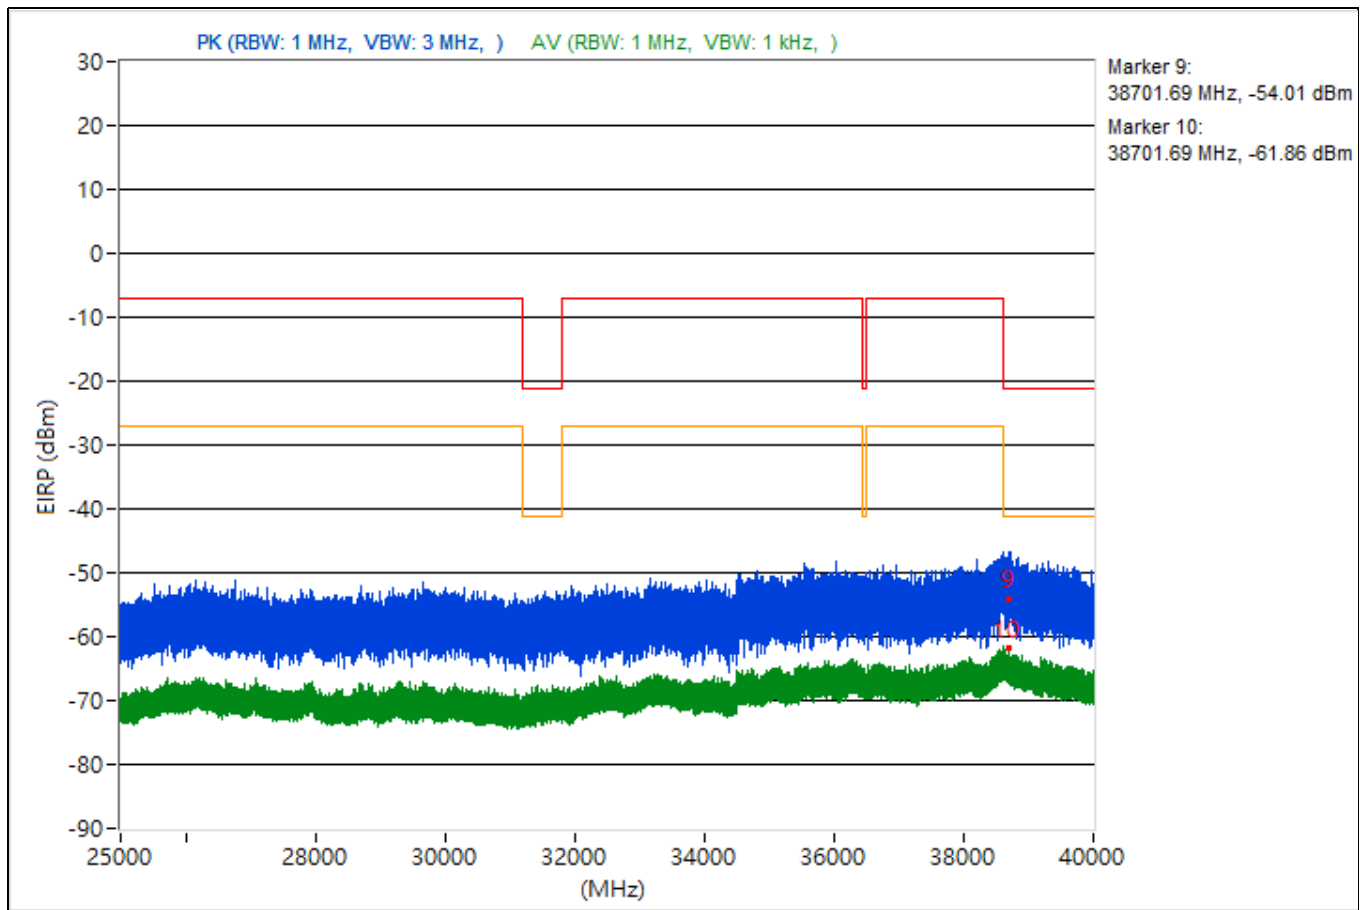


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.77	47.27 PK	74	-26.73	-52.91	4.92	-47.99
2	3806.77	36.16 AV	54	-17.84	-64.02	4.92	-59.1
3	7277.06	44.74 PK	74	-29.26	-55.44	4.92	-50.52
4	7277.06	36.2 AV	54	-17.8	-63.98	4.92	-59.06
5	18988.9	44.72 PK	74	-29.28	-55.46	4.92	-50.54
6	18988.9	36.3 AV	54	-17.7	-63.88	4.92	-58.96
7	22361.7	42.12 PK	74	-31.88	-58.06	4.92	-53.14
8	22361.7	36.91 AV	54	-17.09	-63.27	4.92	-58.35
9	38663.64	43.99 PK	74	-30.01	-56.19	4.92	-51.27
10	38663.64	33.35 AV	54	-20.65	-66.83	4.92	-61.91

Note: Margin value = Emission Level - Limit value

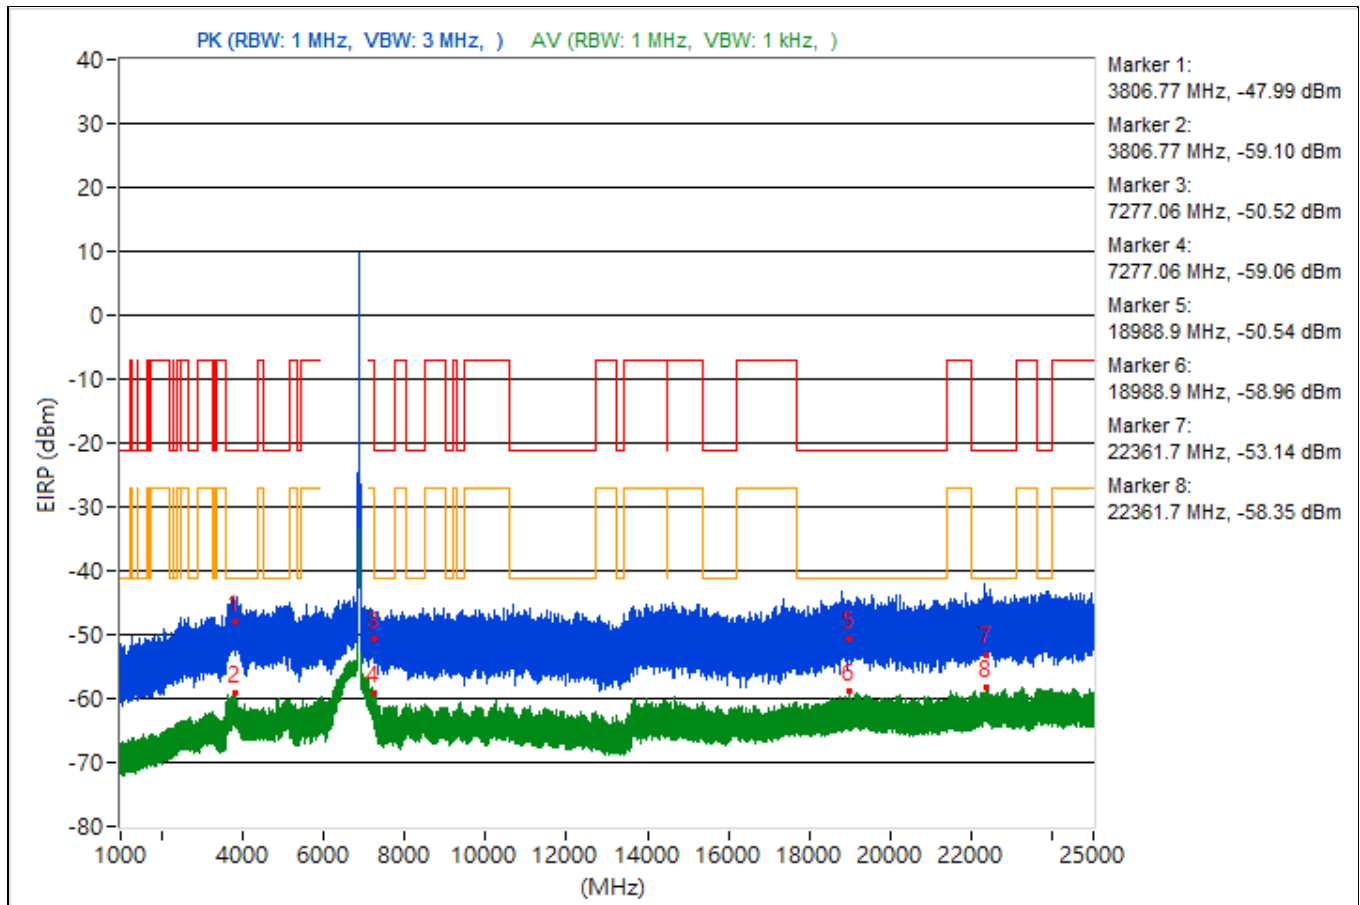


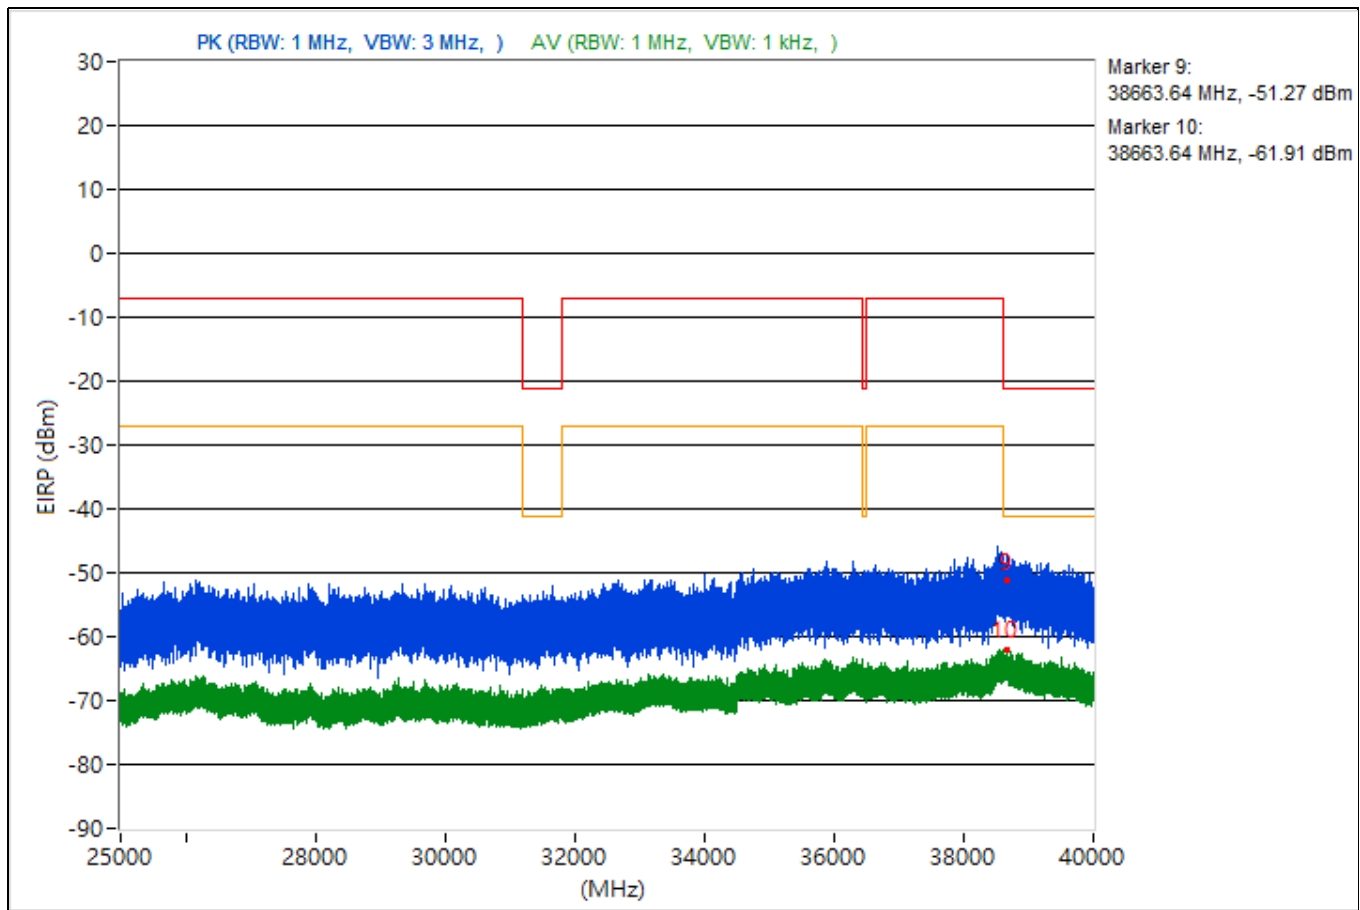


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.31	46.75 PK	74	-27.25	-53.43	4.92	-48.51
2	3842.31	35.75 AV	54	-18.25	-64.43	4.92	-59.51
3	7267.49	45.54 PK	74	-28.46	-54.64	4.92	-49.72
4	7267.49	36.71 AV	54	-17.29	-63.47	4.92	-58.55
5	18992.3	46.4 PK	74	-27.6	-53.78	4.92	-48.86
6	18992.3	36.35 AV	54	-17.65	-63.83	4.92	-58.91
7	22376.7	45.47 PK	74	-28.53	-54.71	4.92	-49.79
8	22376.7	36.89 AV	54	-17.11	-63.29	4.92	-58.37
9	38603.64	41.58 PK	74	-32.42	-58.6	4.92	-53.68
10	38603.64	33.23 AV	54	-20.77	-66.95	4.92	-62.03

Note: Margin value = Emission Level - Limit value

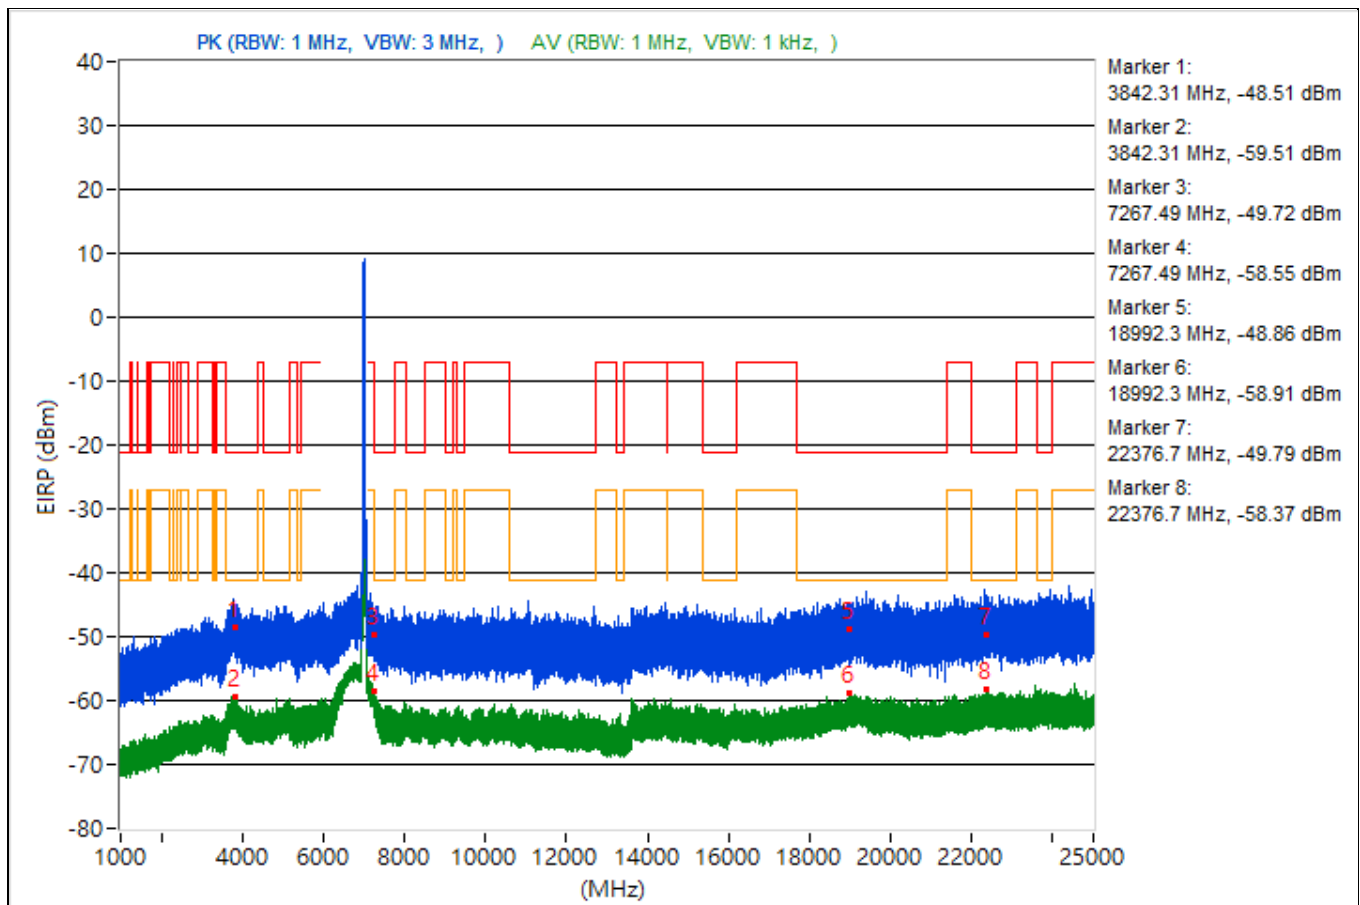


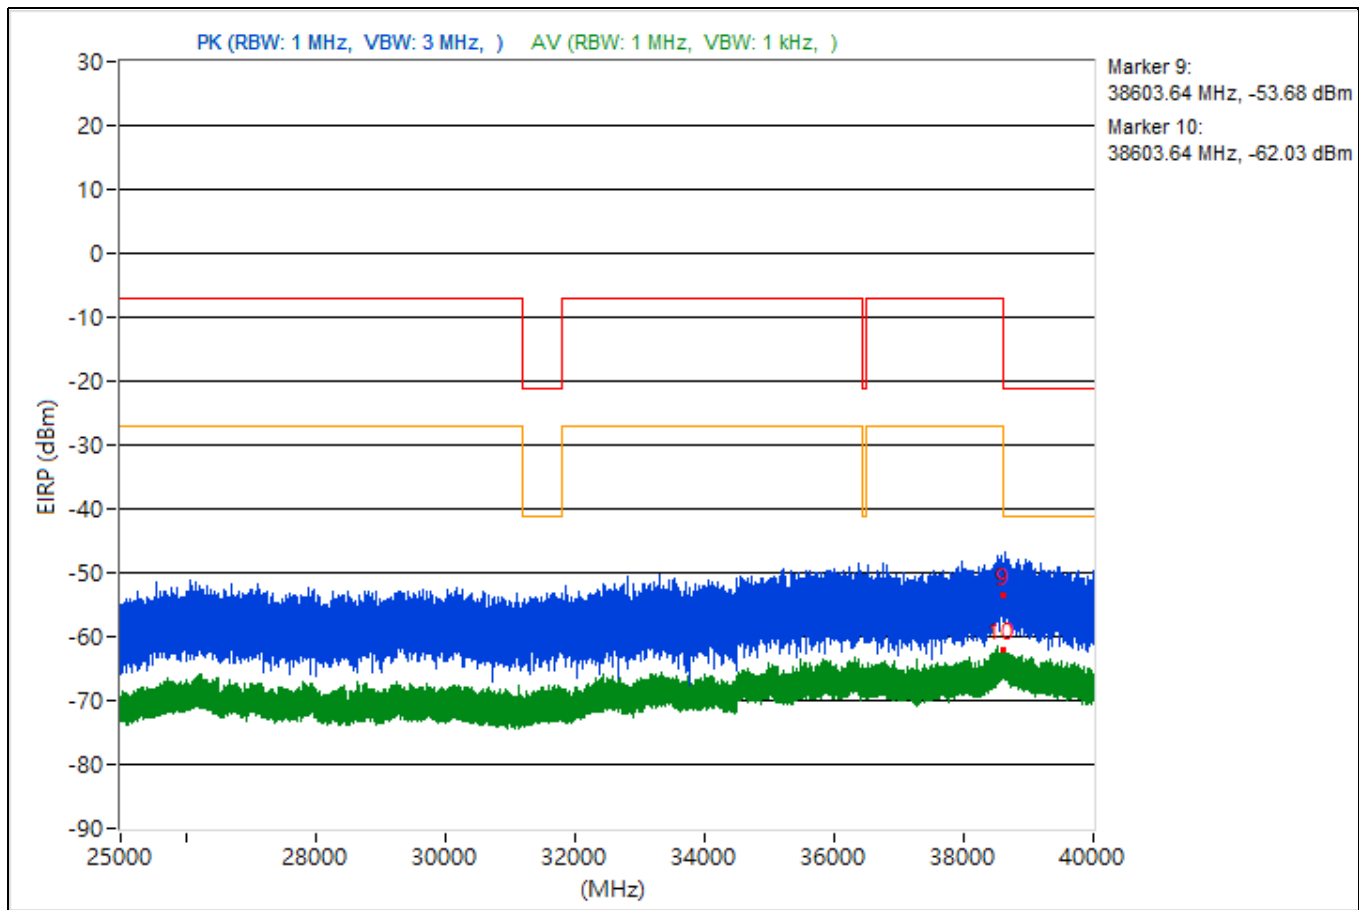


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3740.27	47.67 PK	74	-26.33	-52.51	4.92	-47.59
2	3740.27	35.79 AV	54	-18.21	-64.39	4.92	-59.47
3	7255.36	45.63 PK	74	-28.37	-54.55	4.92	-49.63
4	7255.36	37.58 AV	54	-16.42	-62.6	4.92	-57.68
5	19100.6	43.04 PK	74	-30.96	-57.14	4.92	-52.22
6	19100.6	36.31 AV	54	-17.69	-63.87	4.92	-58.95
7	23851.2	46.87 PK	74	-27.13	-53.31	4.92	-48.39
8	23851.2	37.62 AV	54	-16.38	-62.56	4.92	-57.64
9	38600.89	42.85 PK	74	-31.15	-57.33	4.92	-52.41
10	38600.89	33.56 AV	54	-20.44	-66.62	4.92	-61.7

Note: Margin value = Emission Level - Limit value

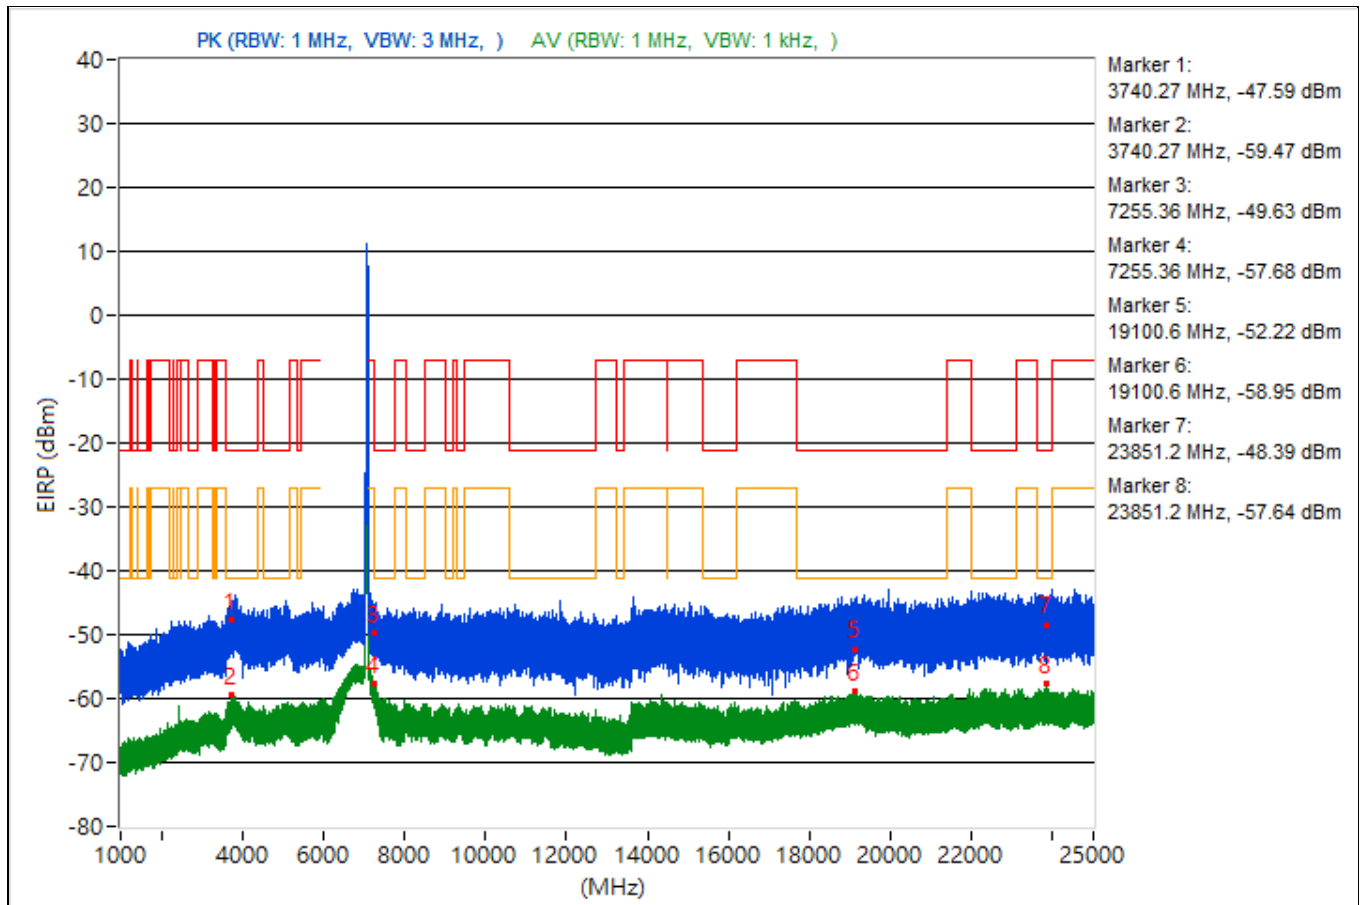


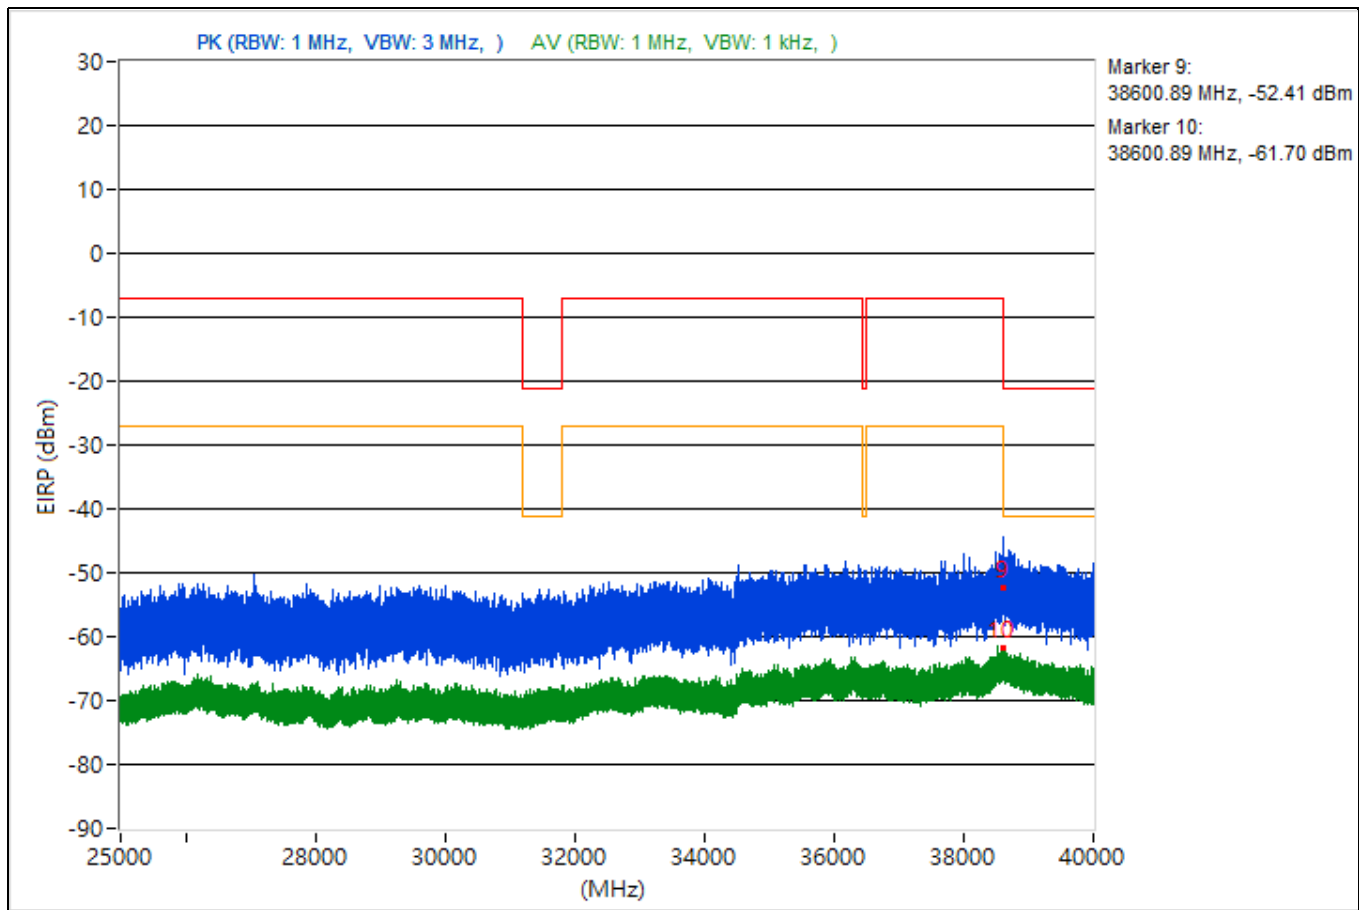


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.23	50.09 PK	74	-23.91	-50.09	4.92	-45.17
2	3821.23	35.5 AV	54	-18.5	-64.68	4.92	-59.76
3	14474.31	43.61 PK	74	-30.39	-56.57	4.92	-51.65
4	14474.31	35.32 AV	54	-18.68	-64.86	4.92	-59.94
5	19229	46.25 PK	74	-27.75	-53.93	4.92	-49.01
6	19229	36.13 AV	54	-17.87	-64.05	4.92	-59.13
7	23634.3	45.79 PK	74	-28.21	-54.39	4.92	-49.47
8	23634.3	36.98 AV	54	-17.02	-63.2	4.92	-58.28
9	38606.13	44.58 PK	74	-29.42	-55.6	4.92	-50.68
10	38606.13	33.46 AV	54	-20.54	-66.72	4.92	-61.8

Note: Margin value = Emission Level - Limit value

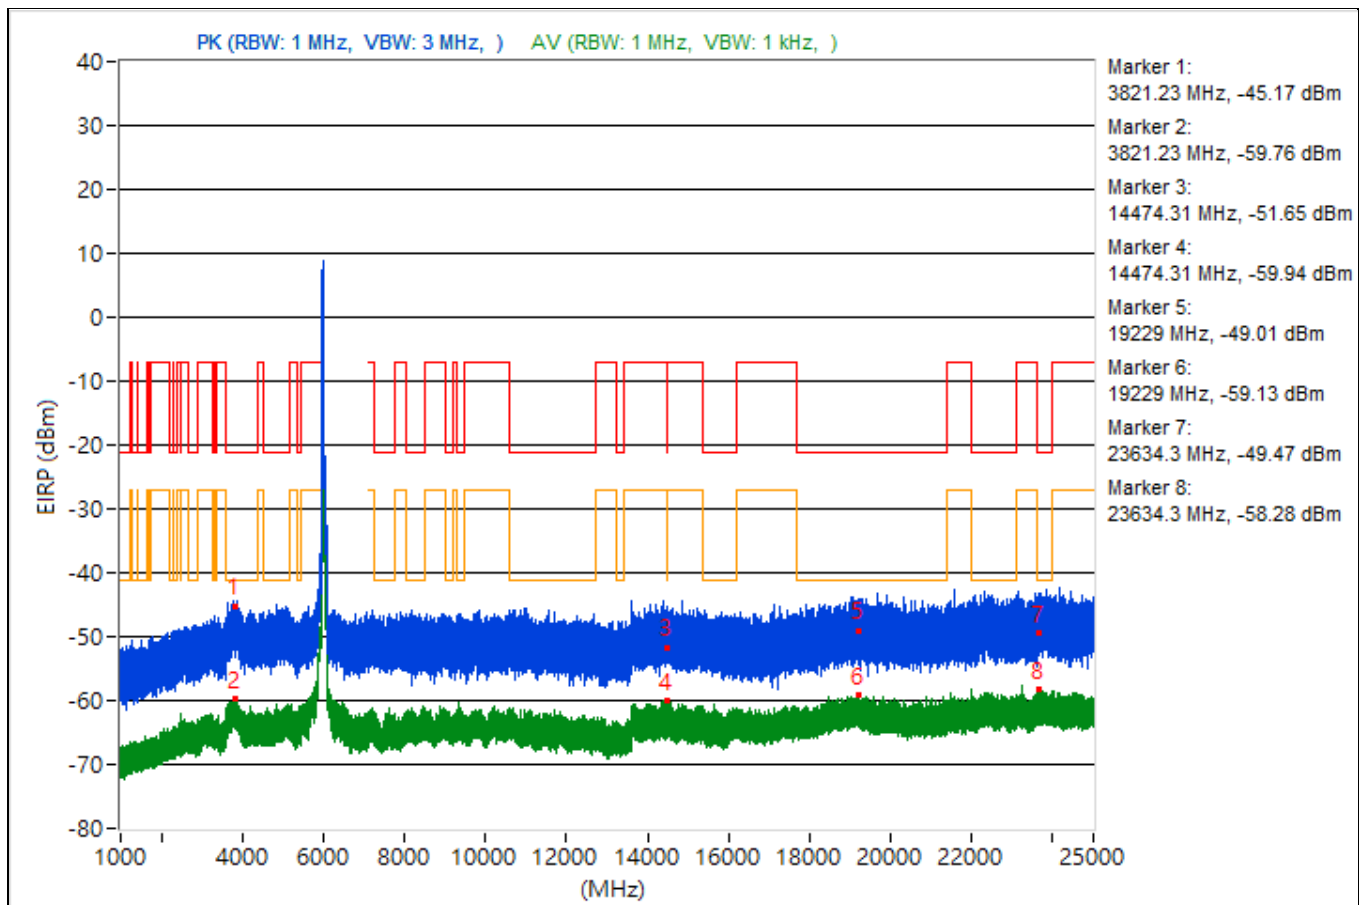


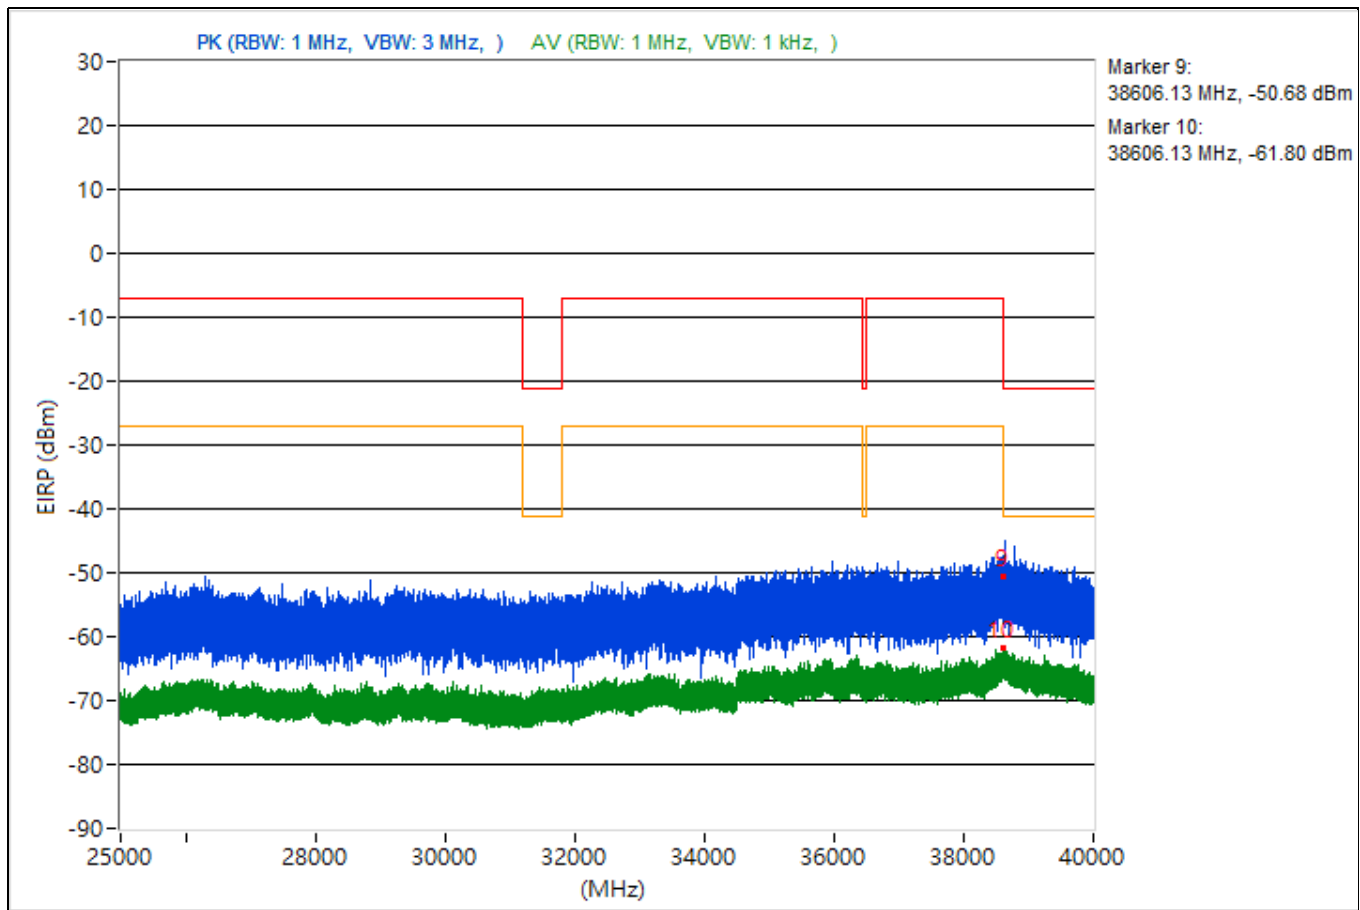


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.67	48.08 PK	74	-25.92	-52.1	4.92	-47.18
2	3832.67	36.31 AV	54	-17.69	-63.87	4.92	-58.95
3	14473.42	44.84 PK	74	-29.16	-55.34	4.92	-50.42
4	14473.42	35.31 AV	54	-18.69	-64.87	4.92	-59.95
5	19354.1	47.52 PK	74	-26.48	-52.66	4.92	-47.74
6	19354.1	35.99 AV	54	-18.01	-64.19	4.92	-59.27
7	23683.3	49.34 PK	74	-24.66	-50.84	4.92	-45.92
8	23683.3	37.54 AV	54	-16.46	-62.64	4.92	-57.72
9	38623.38	41.83 PK	74	-32.17	-58.35	4.92	-53.43
10	38623.38	33.75 AV	54	-20.25	-66.43	4.92	-61.51

Note: Margin value = Emission Level - Limit value

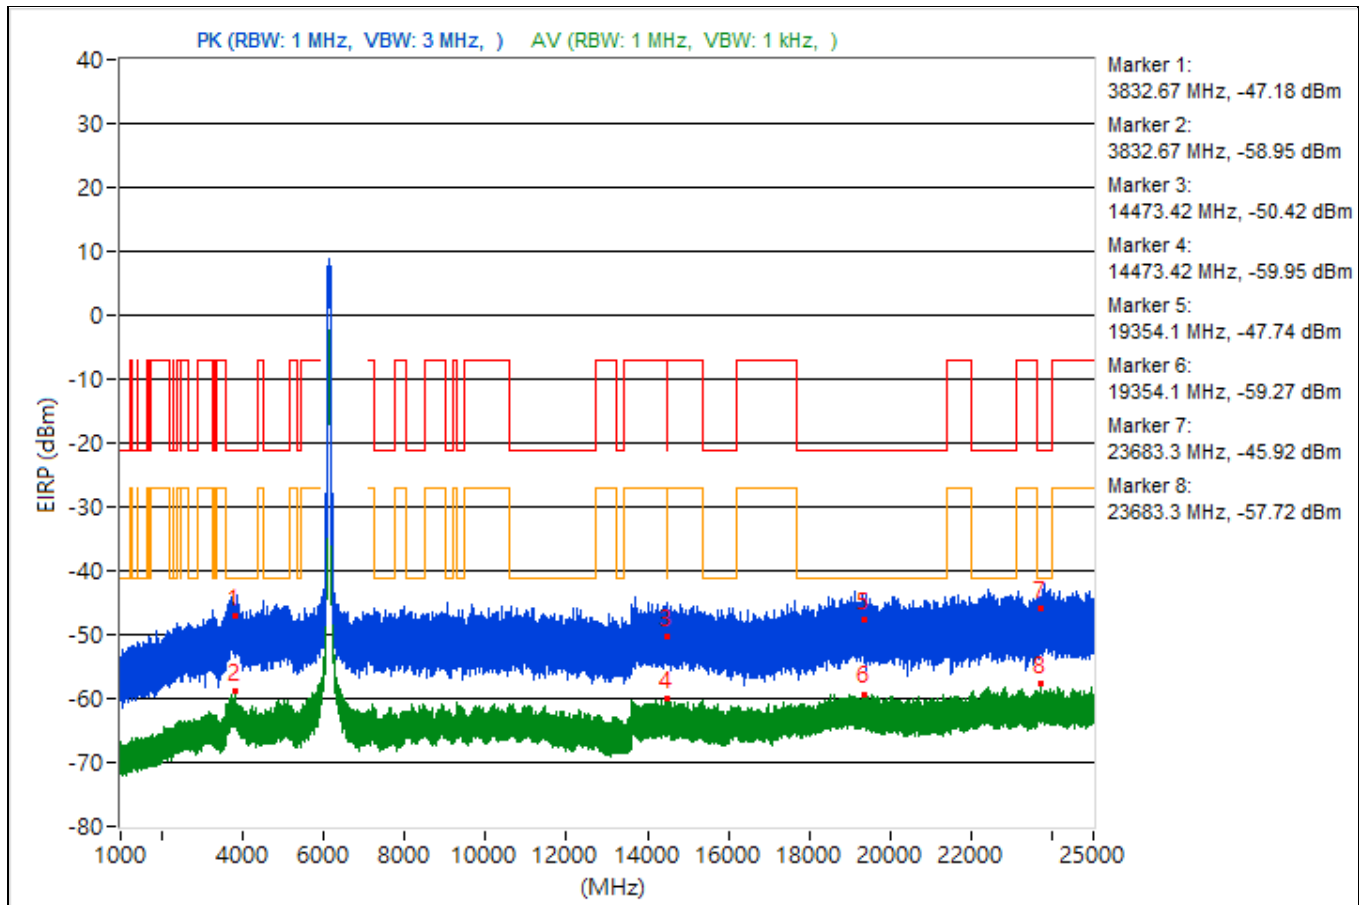


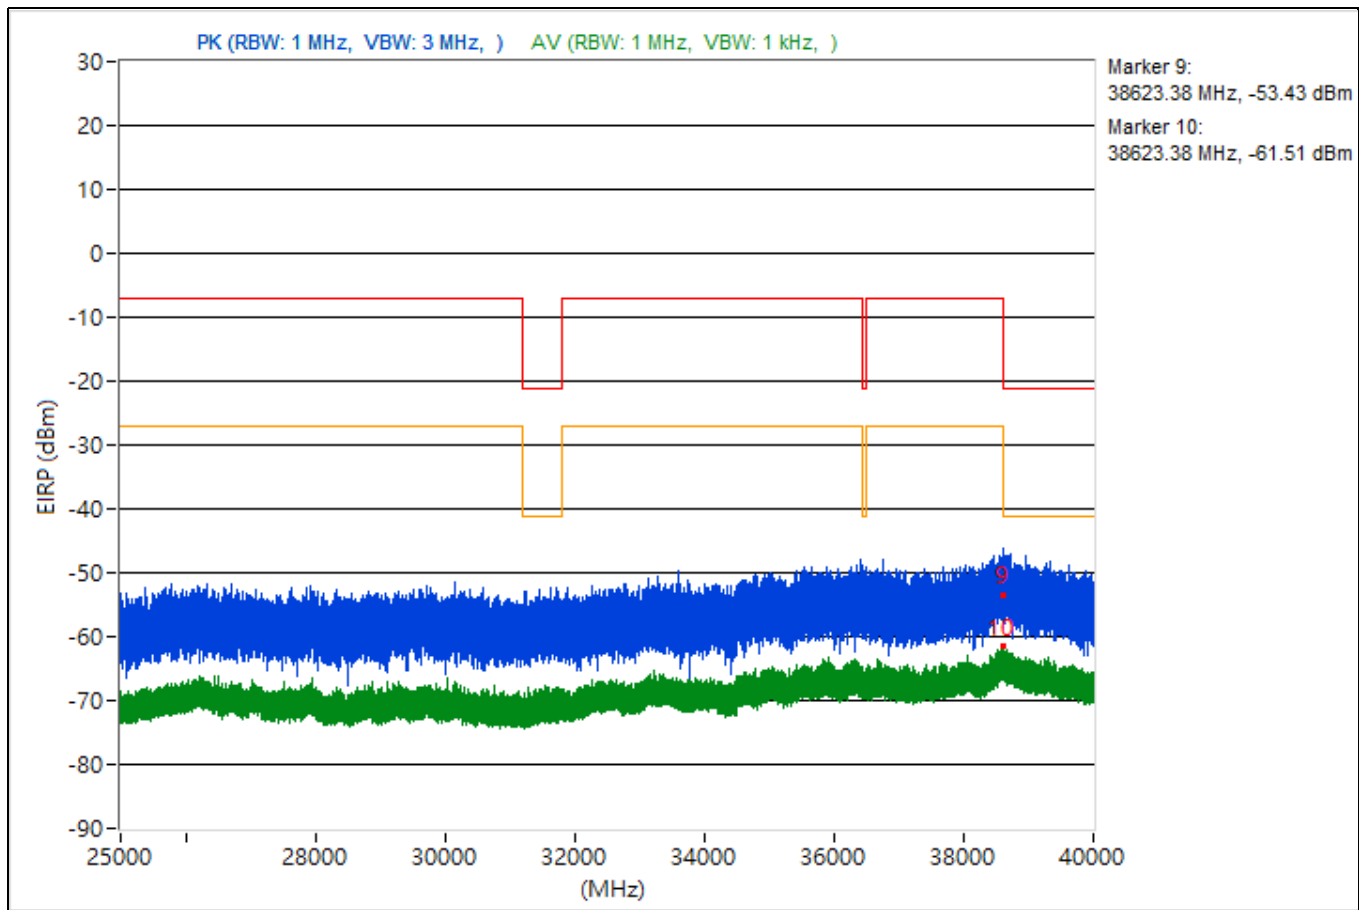


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3835.16	47.51 PK	74	-26.49	-52.67	4.92	-47.75
2	3835.16	35.71 AV	54	-18.29	-64.47	4.92	-59.55
3	15350.58	41.68 PK	74	-32.32	-58.5	4.92	-53.58
4	15350.58	35.37 AV	54	-18.63	-64.81	4.92	-59.89
5	19861.3	47.58 PK	74	-26.42	-52.6	4.92	-47.68
6	19861.3	36.17 AV	54	-17.83	-64.01	4.92	-59.09
7	22355.1	47.04 PK	74	-26.96	-53.14	4.92	-48.22
8	22355.1	36.83 AV	54	-17.17	-63.35	4.92	-58.43
9	38607.56	43.17 PK	74	-30.83	-57.01	4.92	-52.09
10	38607.56	34.01 AV	54	-19.99	-66.17	4.92	-61.25

Note: Margin value = Emission Level - Limit value

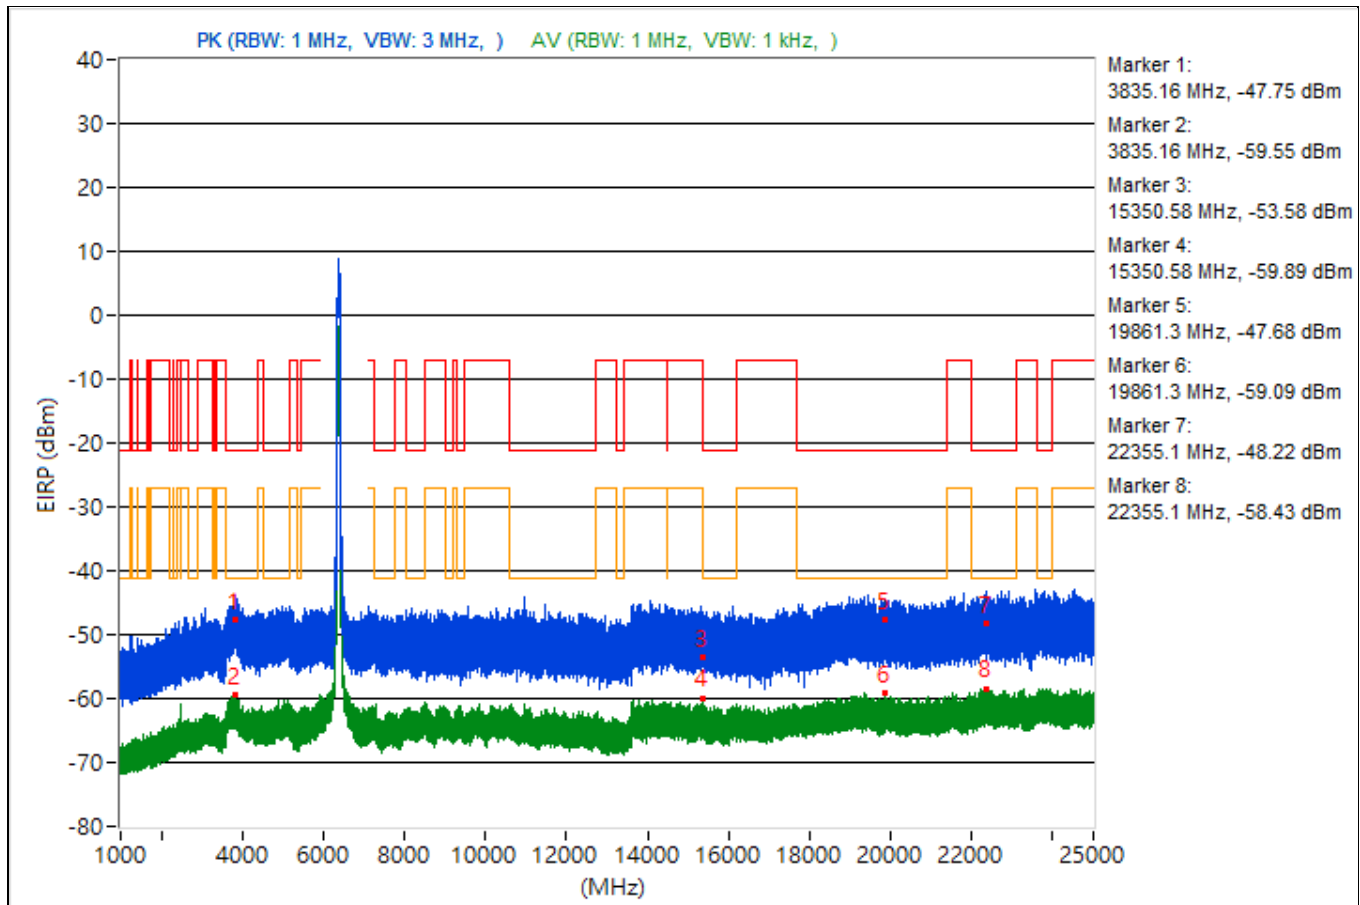


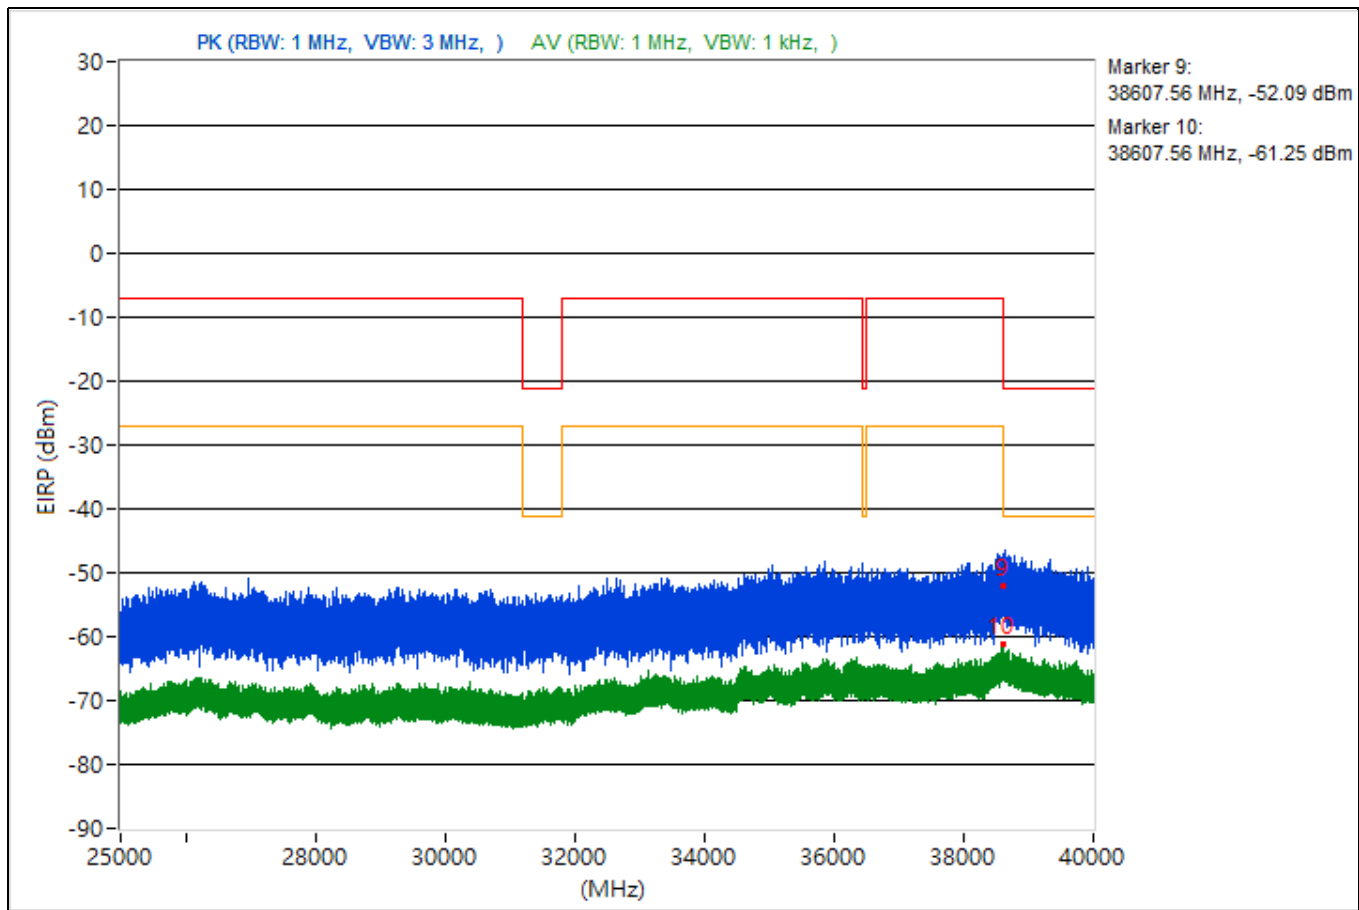


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3724.09	47.01 PK	74	-26.99	-53.17	4.92	-48.25
2	3724.09	35.66 AV	54	-18.34	-64.52	4.92	-59.6
3	14475.82	44.42 PK	74	-29.58	-55.76	4.92	-50.84
4	14475.82	35.05 AV	54	-18.95	-65.13	4.92	-60.21
5	19198.8	45.46 PK	74	-28.54	-54.72	4.92	-49.8
6	19198.8	36.3 AV	54	-17.7	-63.88	4.92	-58.96
7	23649.2	46.07 PK	74	-27.93	-54.11	4.92	-49.19
8	23649.2	37.17 AV	54	-16.83	-63.01	4.92	-58.09
9	38633.51	44.27 PK	74	-29.73	-55.91	4.92	-50.99
10	38633.51	33.05 AV	54	-20.95	-67.13	4.92	-62.21

Note: Margin value = Emission Level - Limit value

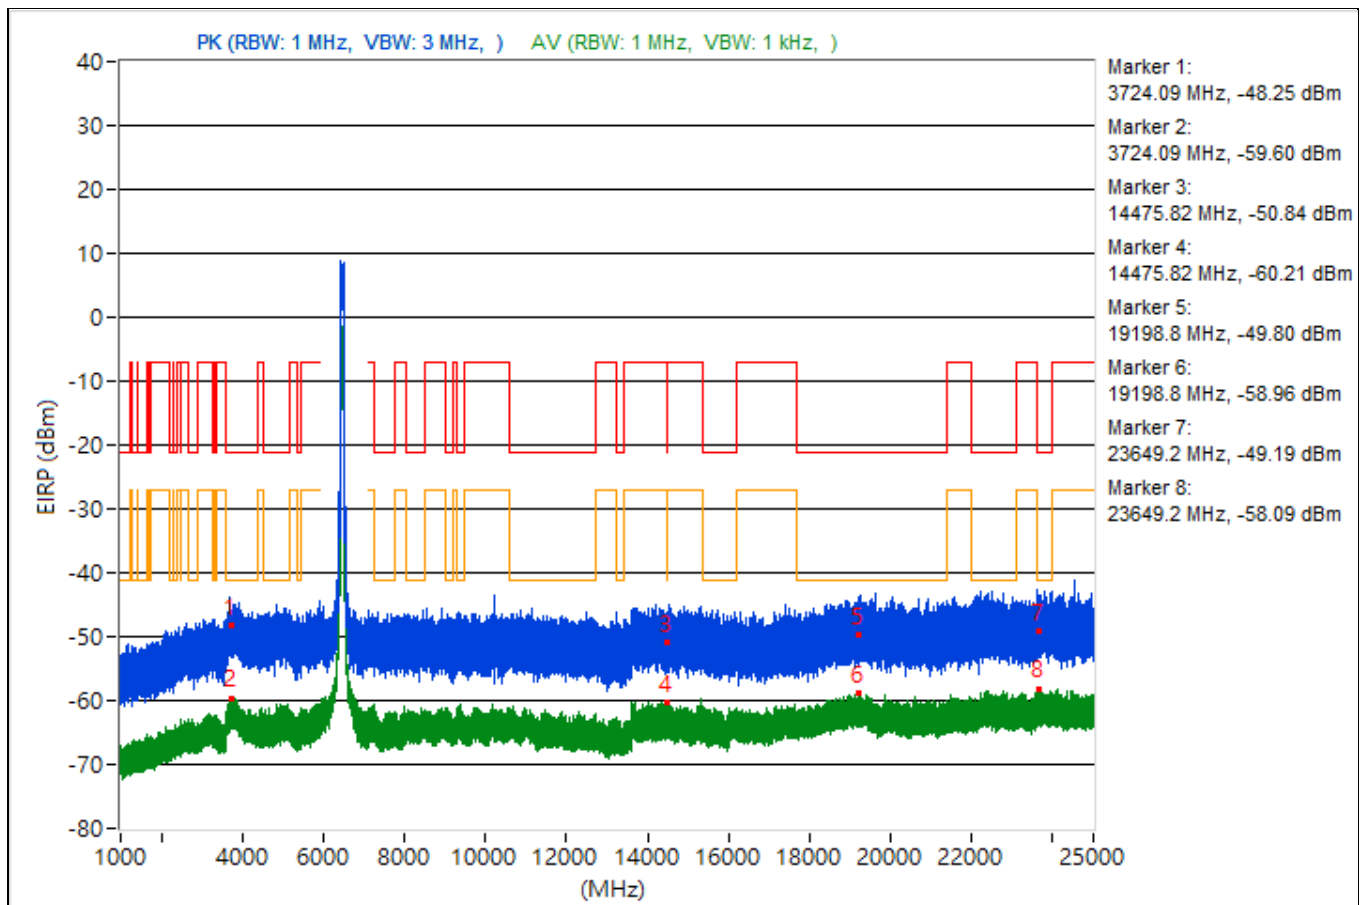


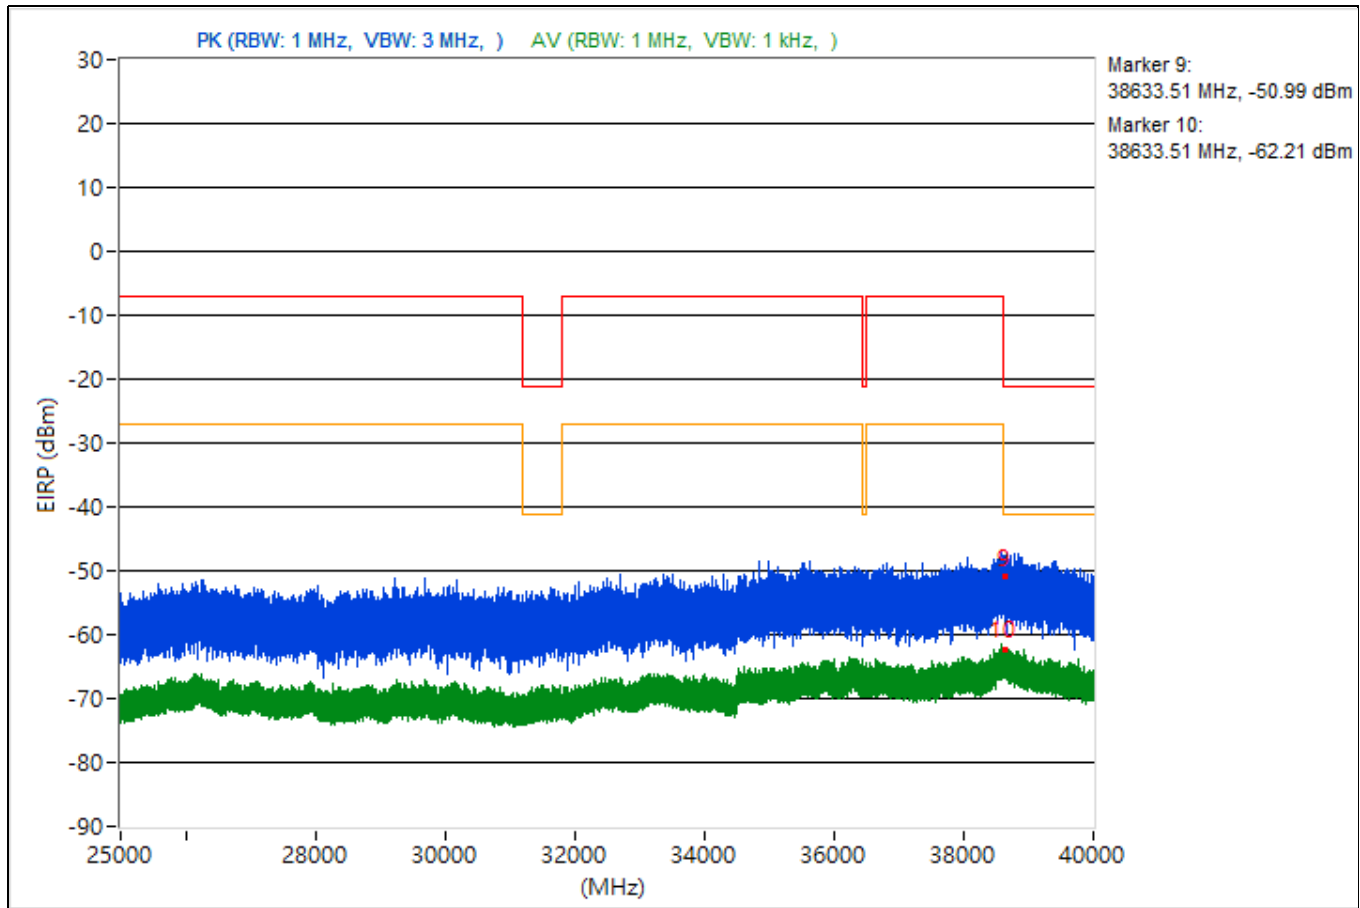


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.78	46.07 PK	74	-27.93	-54.11	4.92	-49.19
2	3821.78	36.3 AV	54	-17.7	-63.88	4.92	-58.96
3	14484.62	45.06 PK	74	-28.94	-55.12	4.92	-50.2
4	14484.62	34.87 AV	54	-19.13	-65.31	4.92	-60.39
5	18818	47.19 PK	74	-26.81	-52.99	4.92	-48.07
6	18818	36.01 AV	54	-17.99	-64.17	4.92	-59.25
7	23970.8	47.77 PK	74	-26.23	-52.41	4.92	-47.49
8	23970.8	36.9 AV	54	-17.1	-63.28	4.92	-58.36
9	38635.02	44.47 PK	74	-29.53	-55.71	4.92	-50.79
10	38635.02	33.03 AV	54	-20.97	-67.15	4.92	-62.23

Note: Margin value = Emission Level - Limit value

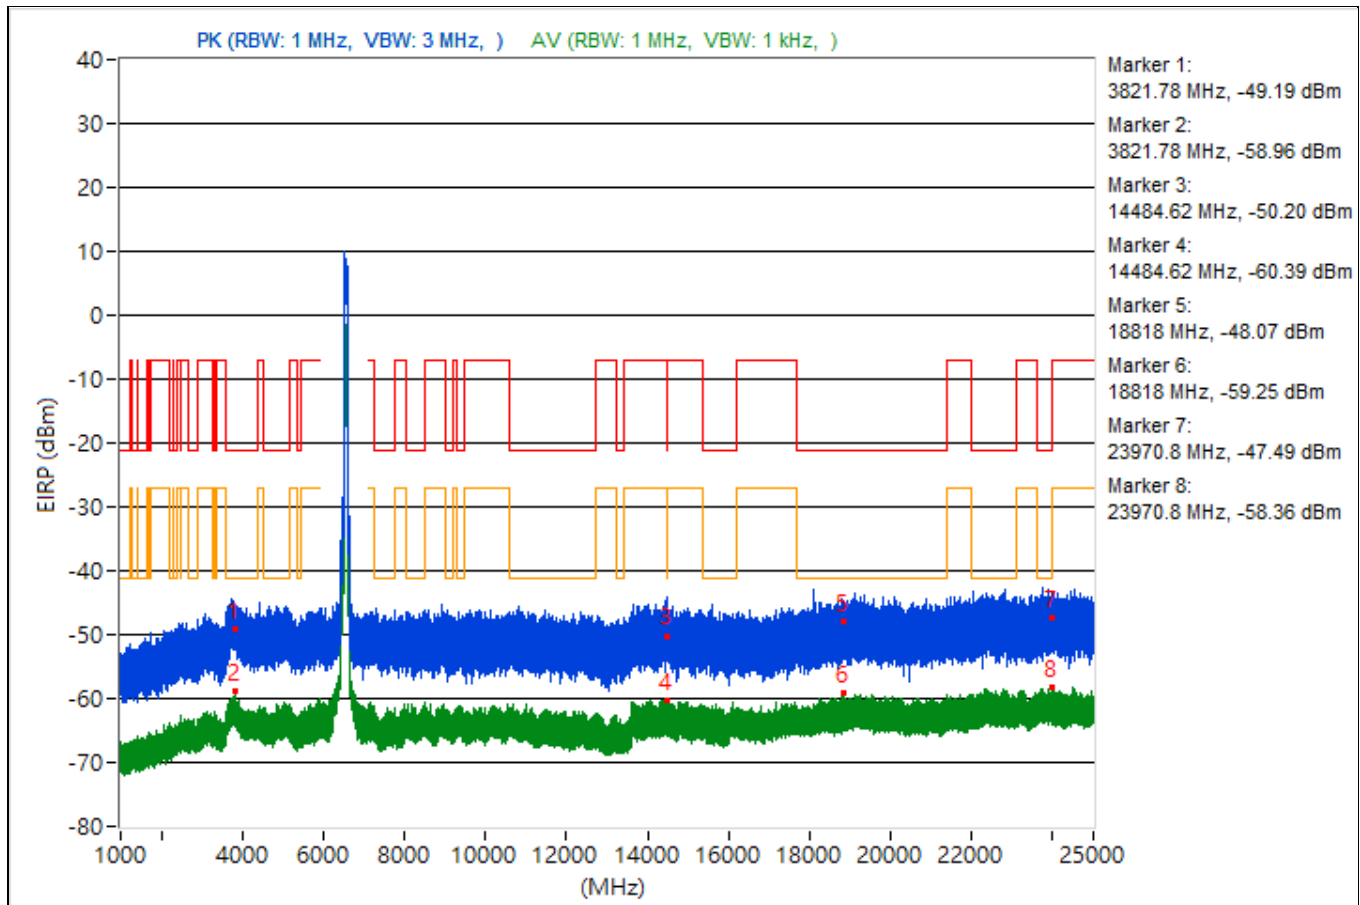


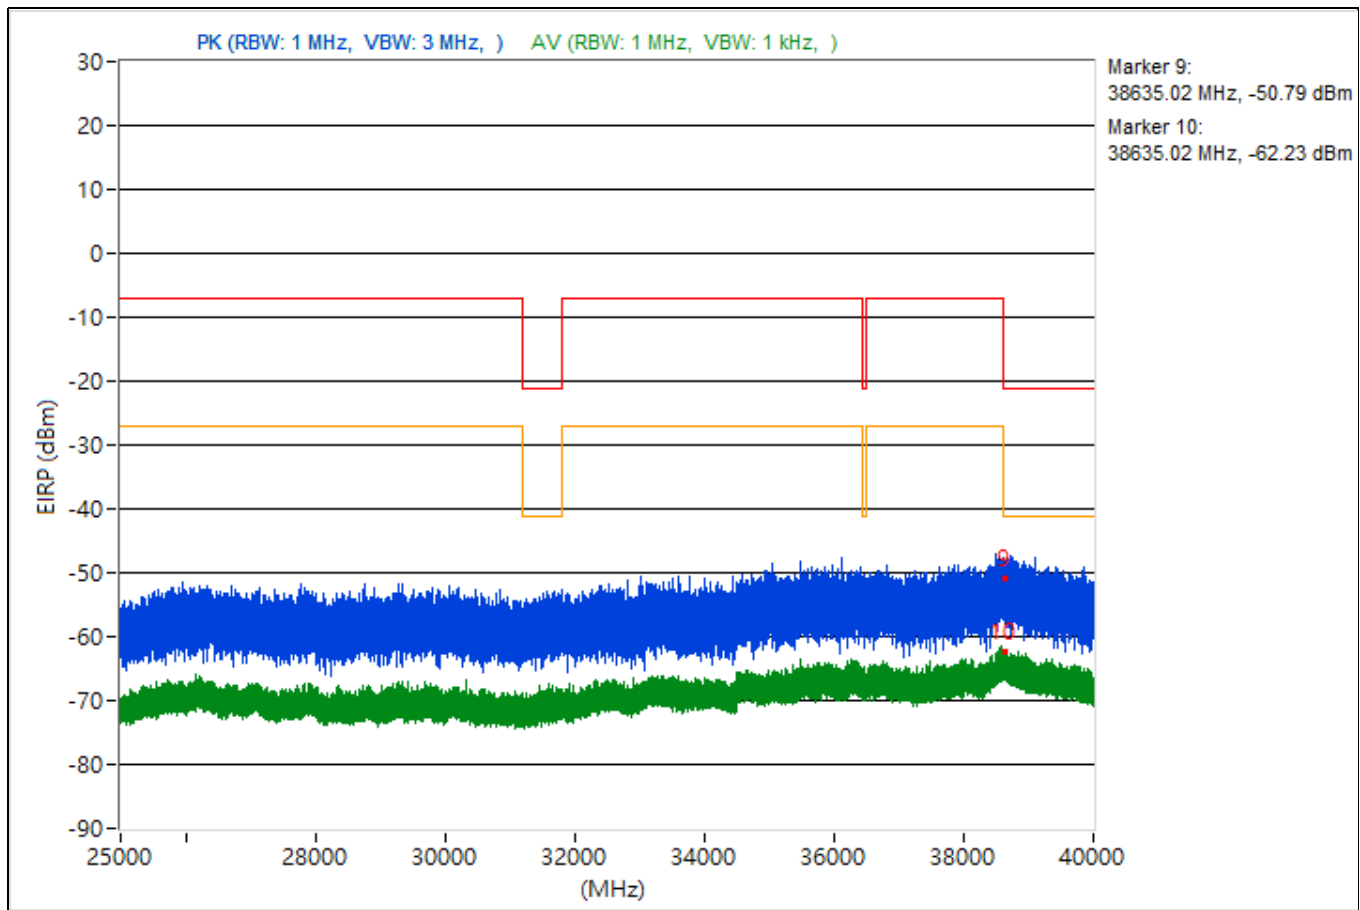


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.03	44.65 PK	74	-29.35	-55.53	4.92	-50.61
2	3810.03	35.94 AV	54	-18.06	-64.24	4.92	-59.32
3	14481.78	44.04 PK	74	-29.96	-56.14	4.92	-51.22
4	14481.78	35.52 AV	54	-18.48	-64.66	4.92	-59.74
5	21369.5	45.08 PK	74	-28.92	-55.1	4.92	-50.18
6	21369.5	36.11 AV	54	-17.89	-64.07	4.92	-59.15
7	23679	46.74 PK	74	-27.26	-53.44	4.92	-48.52
8	23679	37.07 AV	54	-16.93	-63.11	4.92	-58.19
9	38626.4	44.33 PK	74	-29.67	-55.85	4.92	-50.93
10	38626.4	33.37 AV	54	-20.63	-66.81	4.92	-61.89

Note: Margin value = Emission Level - Limit value

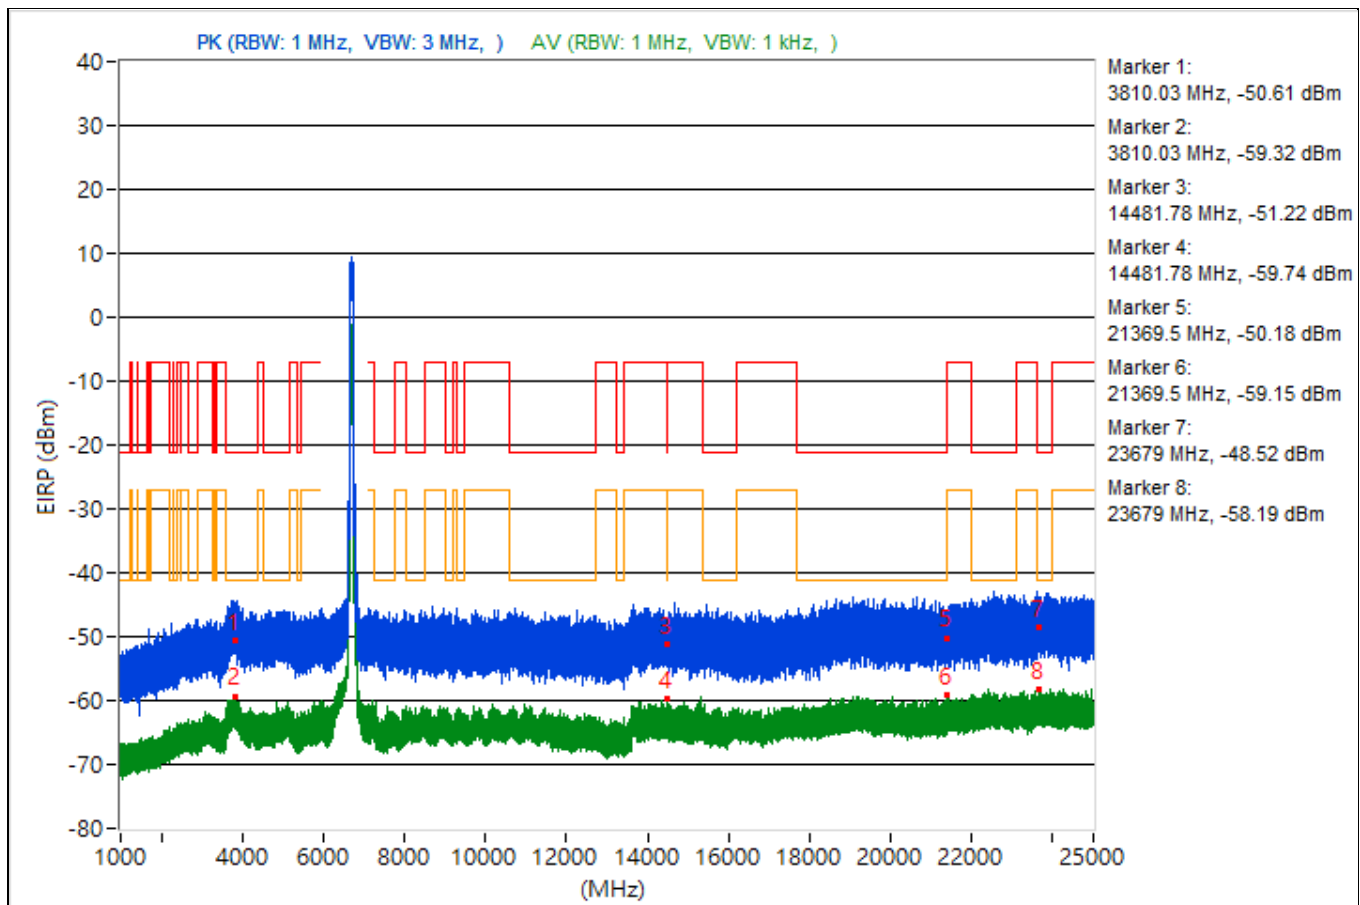


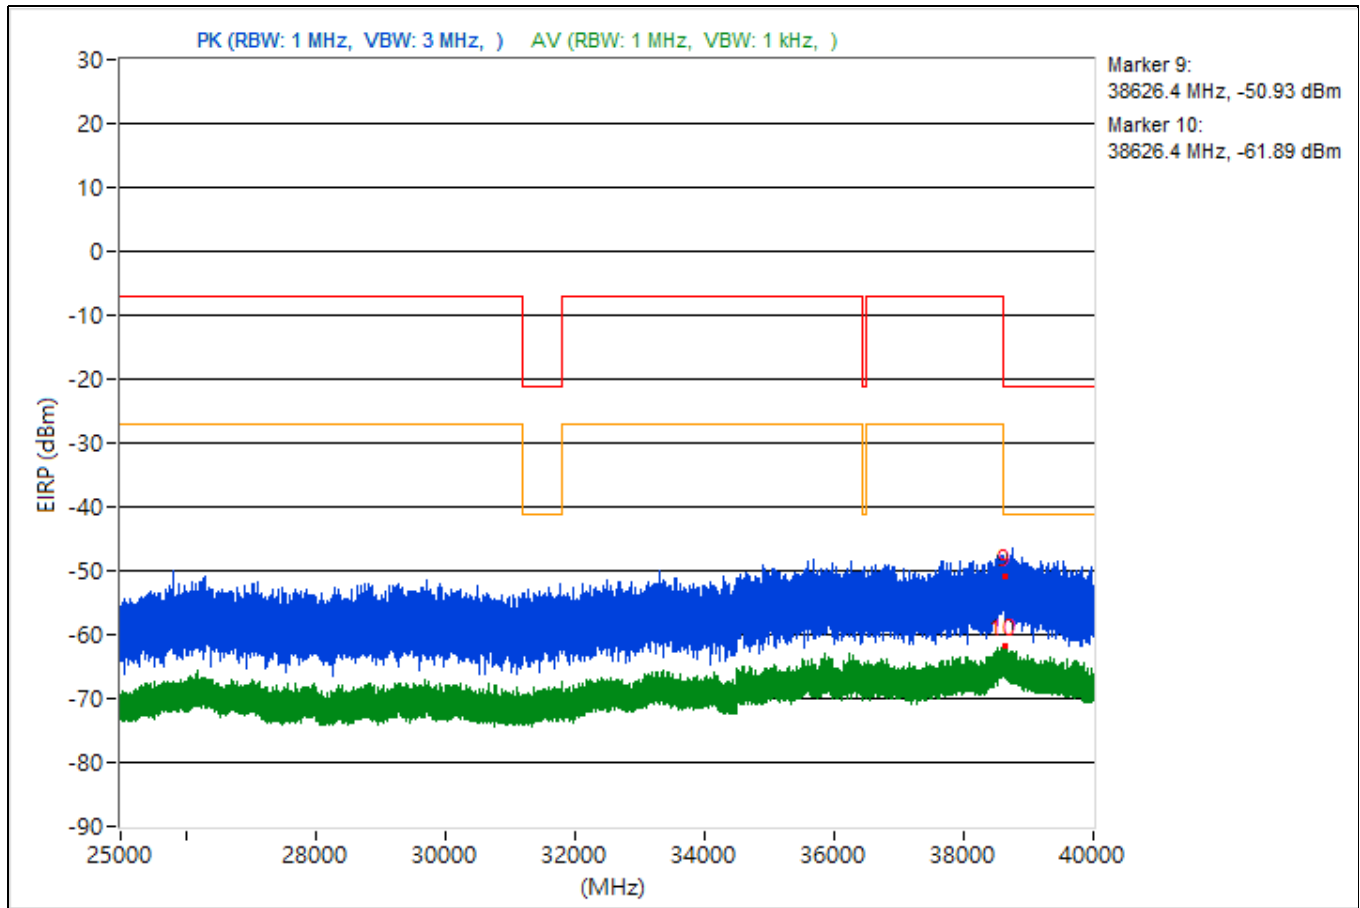


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.62	45.98 PK	74	-28.02	-54.2	4.92	-49.28
2	3807.62	36.26 AV	54	-17.74	-63.92	4.92	-59
3	14499.56	45.87 PK	74	-28.13	-54.31	4.92	-49.39
4	14499.56	34.86 AV	54	-19.14	-65.32	4.92	-60.4
5	19346.9	48.16 PK	74	-25.84	-52.02	4.92	-47.1
6	19346.9	36.16 AV	54	-17.84	-64.02	4.92	-59.1
7	22333.3	45 PK	74	-29	-55.18	4.92	-50.26
8	22333.3	37.42 AV	54	-16.58	-62.76	4.92	-57.84
9	38612.8	43.07 PK	74	-30.93	-57.11	4.92	-52.19
10	38612.8	33.61 AV	54	-20.39	-66.57	4.92	-61.65

Note: Margin value = Emission Level - Limit value

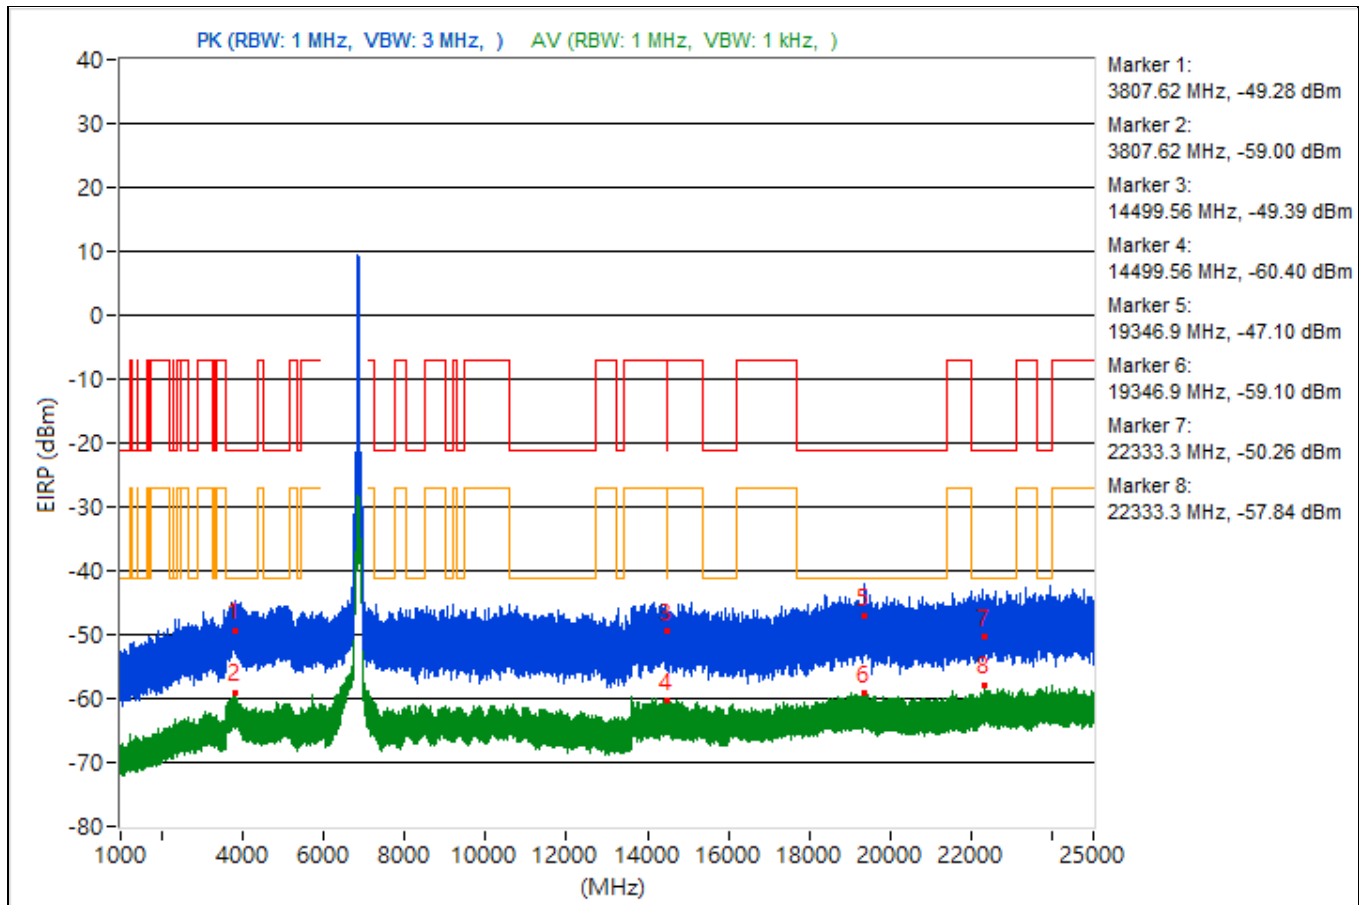


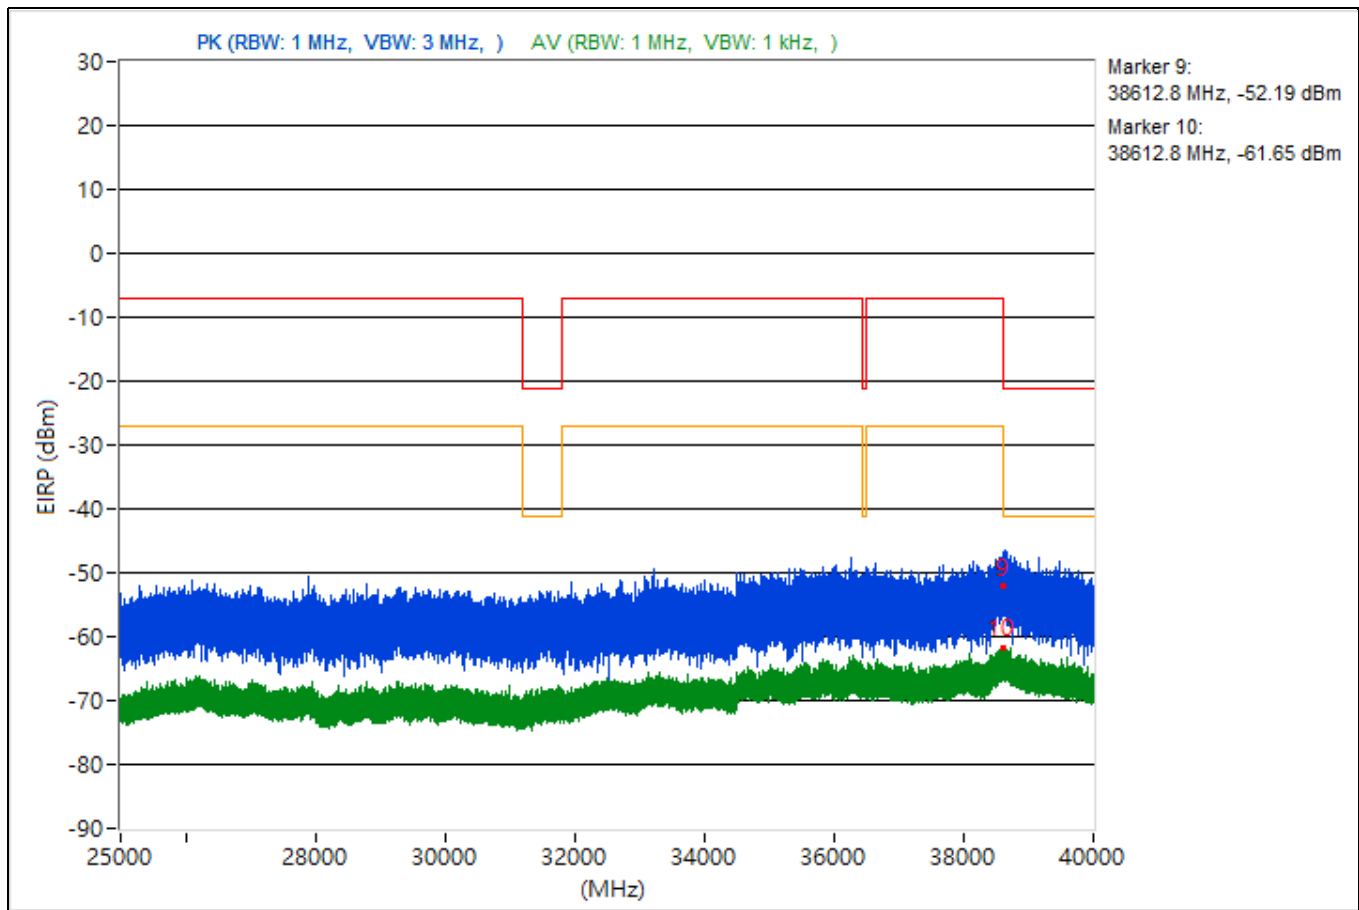


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.77	44.56 PK	74	-29.44	-55.62	4.92	-50.7
2	3792.77	36 AV	54	-18	-64.18	4.92	-59.26
3	7259.32	44.42 PK	74	-29.58	-55.76	4.92	-50.84
4	7259.32	35 AV	54	-19	-65.18	4.92	-60.26
5	18670.3	42.87 PK	74	-31.13	-57.31	4.92	-52.39
6	18670.3	36.23 AV	54	-17.77	-63.95	4.92	-59.03
7	22651.9	46.51 PK	74	-27.49	-53.67	4.92	-48.75
8	22651.9	37.22 AV	54	-16.78	-62.96	4.92	-58.04
9	38654.13	42.72 PK	74	-31.28	-57.46	4.92	-52.54
10	38654.13	33.48 AV	54	-20.52	-66.7	4.92	-61.78

Note: Margin value = Emission Level - Limit value

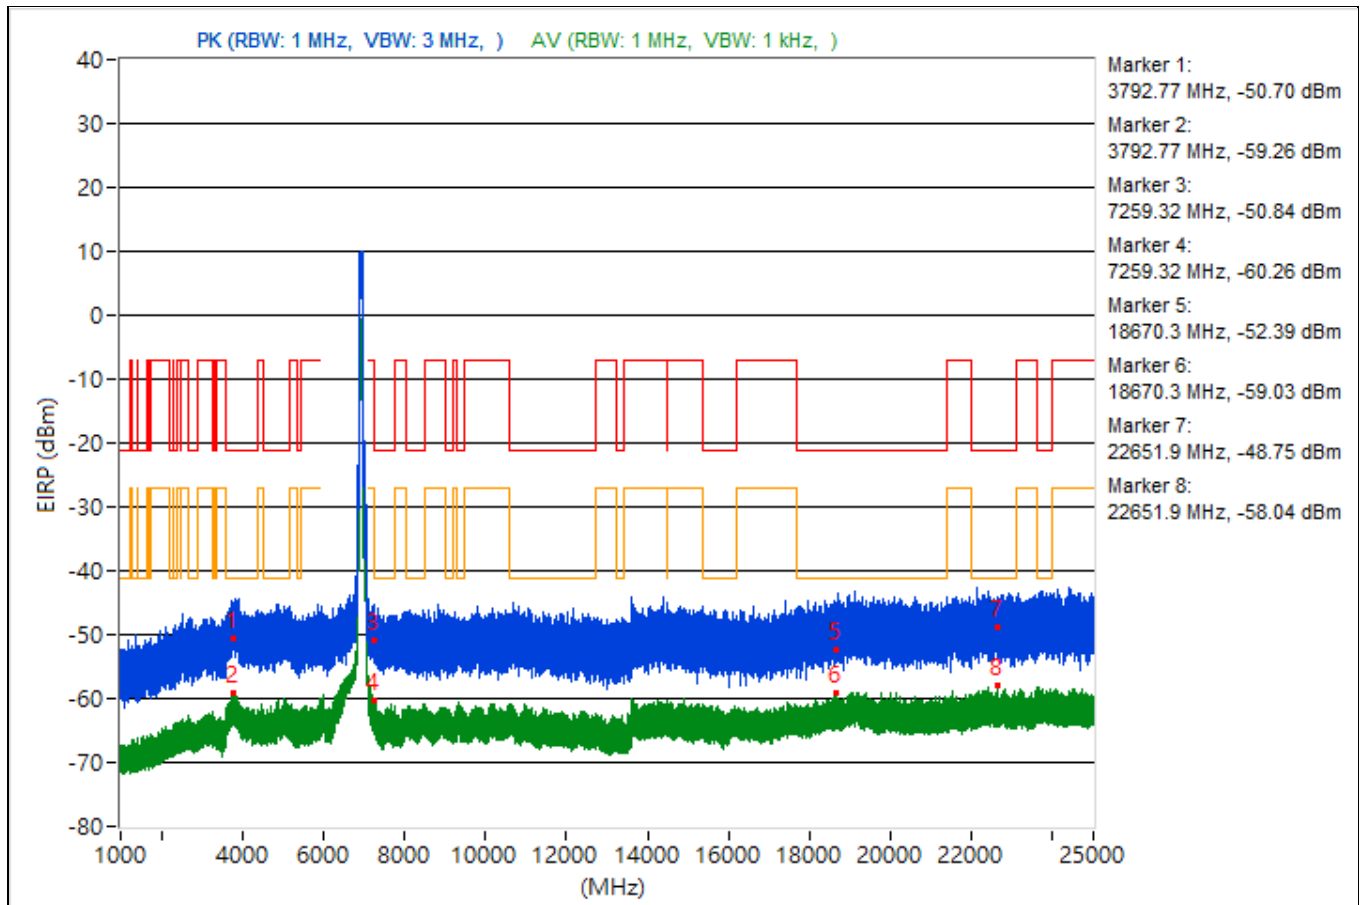


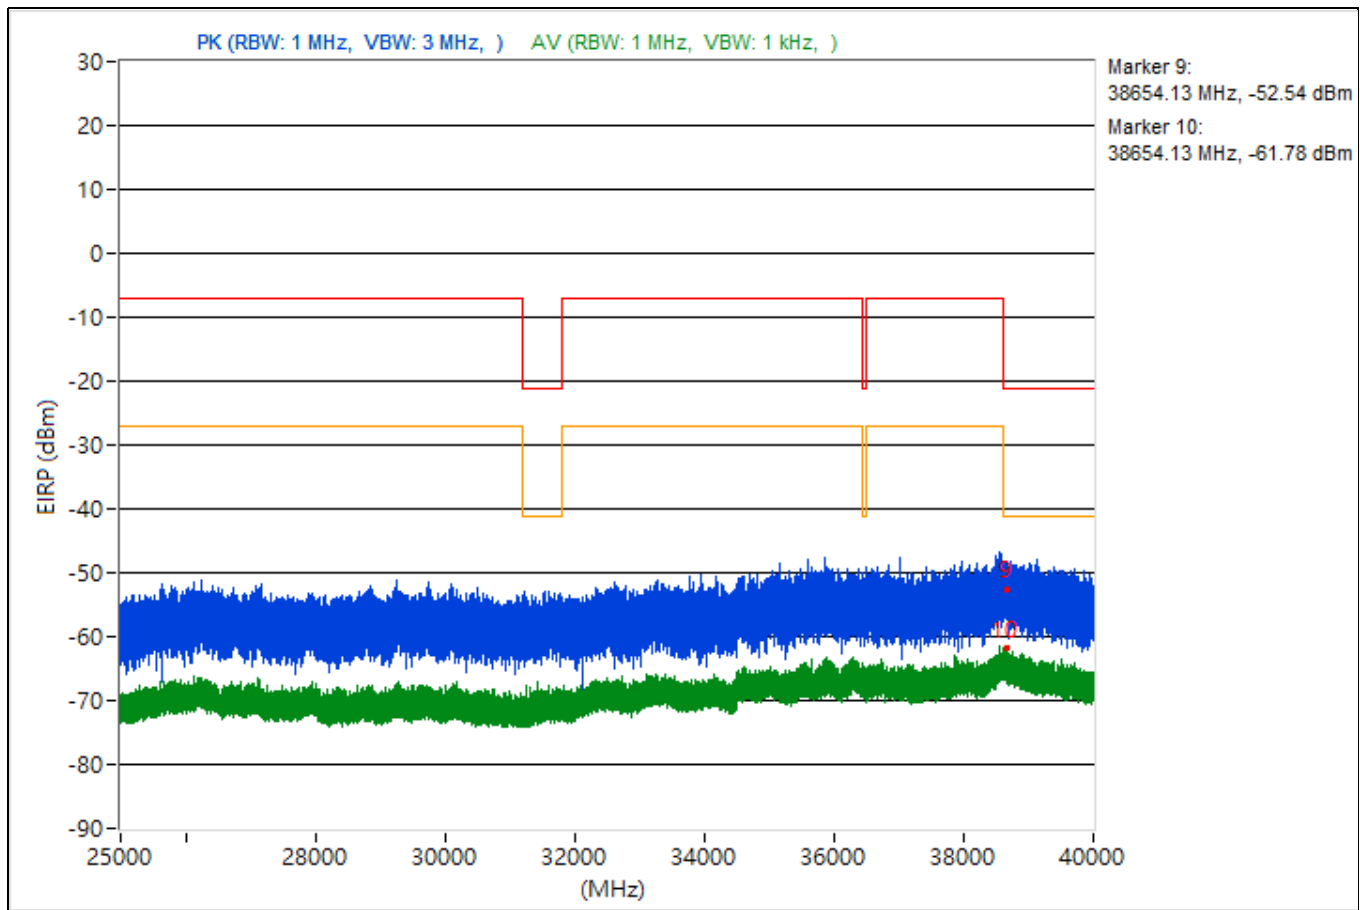


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.43	50.46 PK	74	-23.54	-49.72	4.92	-44.8
2	3776.43	36.01 AV	54	-17.99	-64.17	4.92	-59.25
3	7267.72	44.27 PK	74	-29.73	-55.91	4.92	-50.99
4	7267.72	35.82 AV	54	-18.18	-64.36	4.92	-59.44
5	18857.8	48.86 PK	74	-25.14	-51.32	4.92	-46.4
6	18857.8	36.32 AV	54	-17.68	-63.86	4.92	-58.94
7	23913.6	46.04 PK	74	-27.96	-54.14	4.92	-49.22
8	23913.6	37 AV	54	-17	-63.18	4.92	-58.26
9	38602.84	41.87 PK	74	-32.13	-58.31	4.92	-53.39
10	38602.84	33.55 AV	54	-20.45	-66.63	4.92	-61.71

Note: Margin value = Emission Level - Limit value

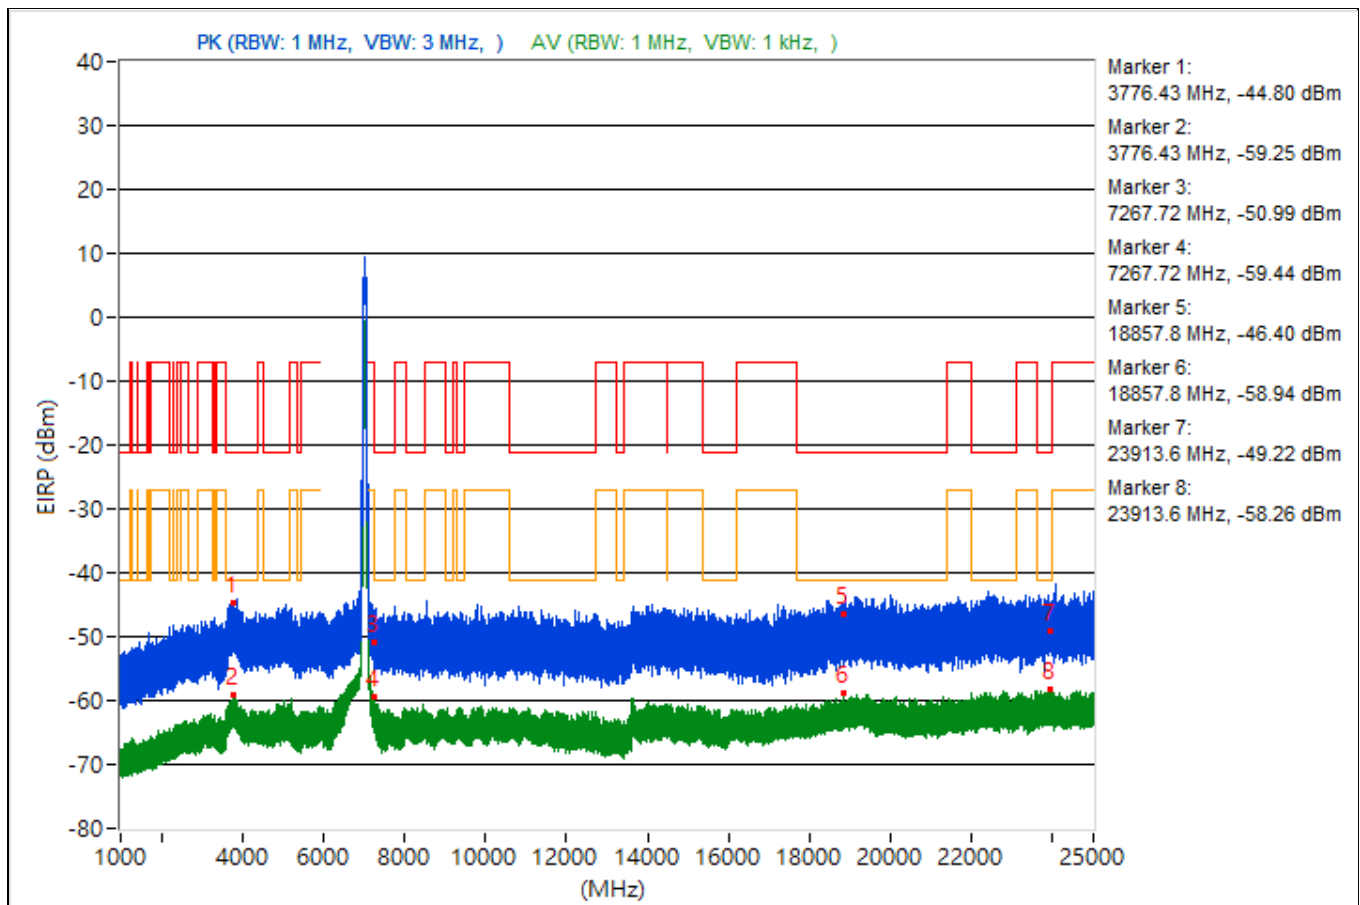

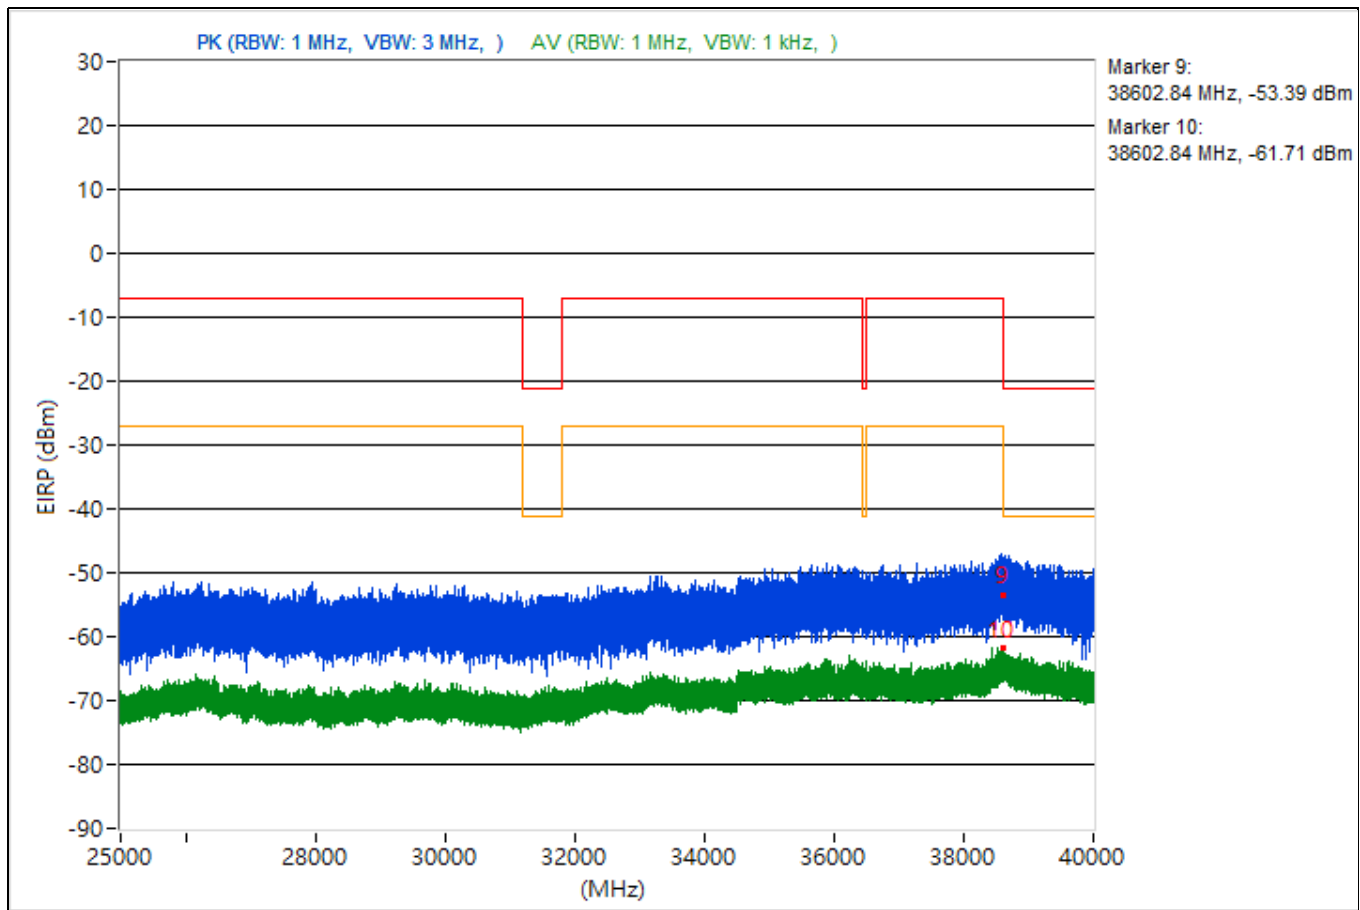



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.72	58.96 PK	88.26	-29.3	-41.22	4.92	-36.3
2	#5874.72	50.22 AV	68.26	-18.04	-49.96	4.92	-45.04
3	8447.11	44.24 PK	74	-29.76	-55.94	4.92	-51.02
4	8447.11	35.31 AV	54	-18.69	-64.87	4.92	-59.95
5	18679.6	46.48 PK	74	-27.52	-53.7	4.92	-48.78
6	18679.6	36.06 AV	54	-17.94	-64.12	4.92	-59.2
7	23718.3	49.21 PK	74	-24.79	-50.97	4.92	-46.05
8	23718.3	37.75 AV	54	-16.25	-62.43	4.92	-57.51
9	38621.42	44.7 PK	74	-29.3	-55.48	4.92	-50.56
10	38621.42	33.37 AV	54	-20.63	-66.81	4.92	-61.89

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

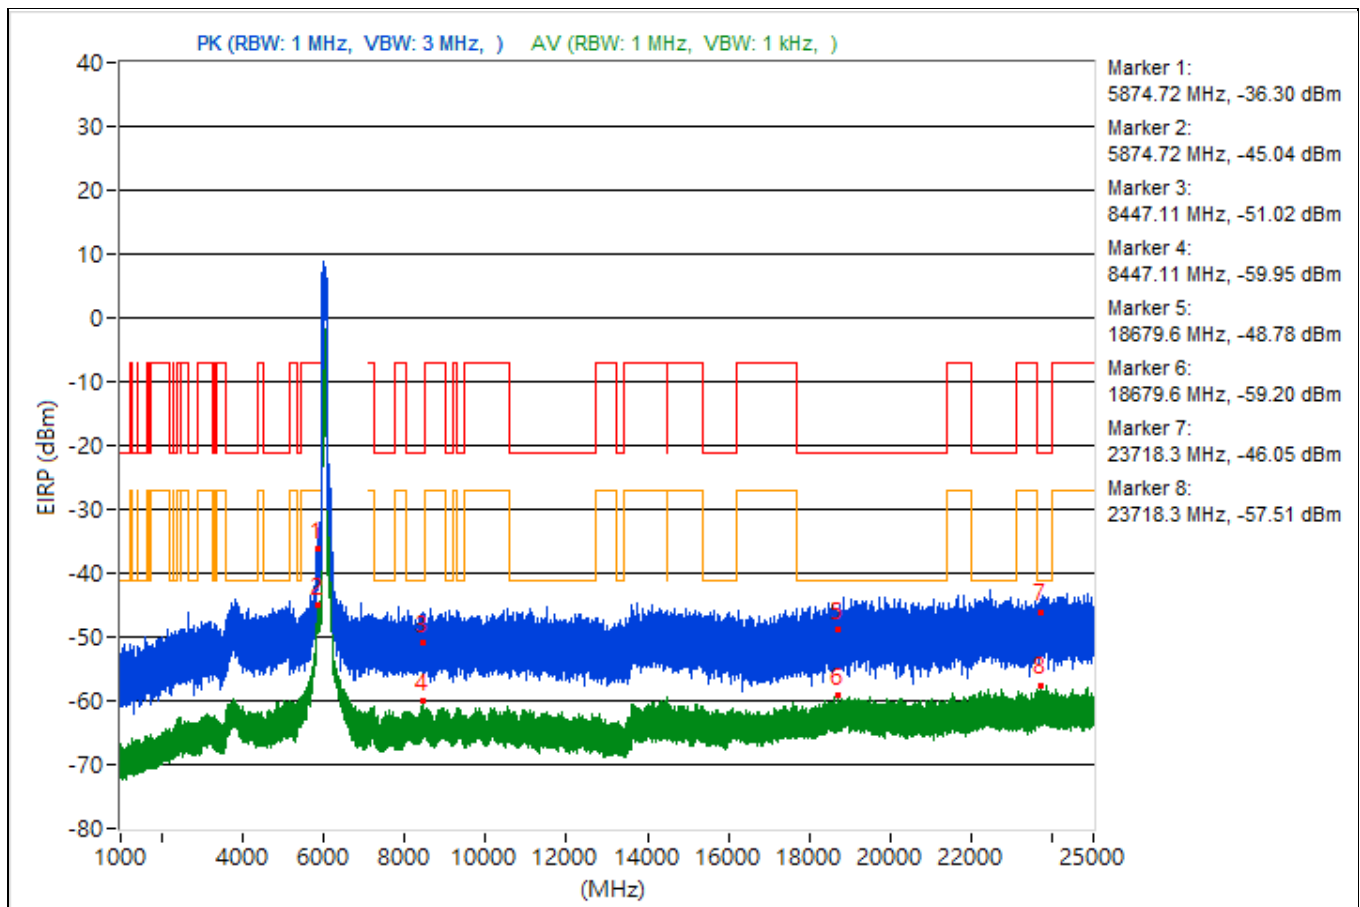


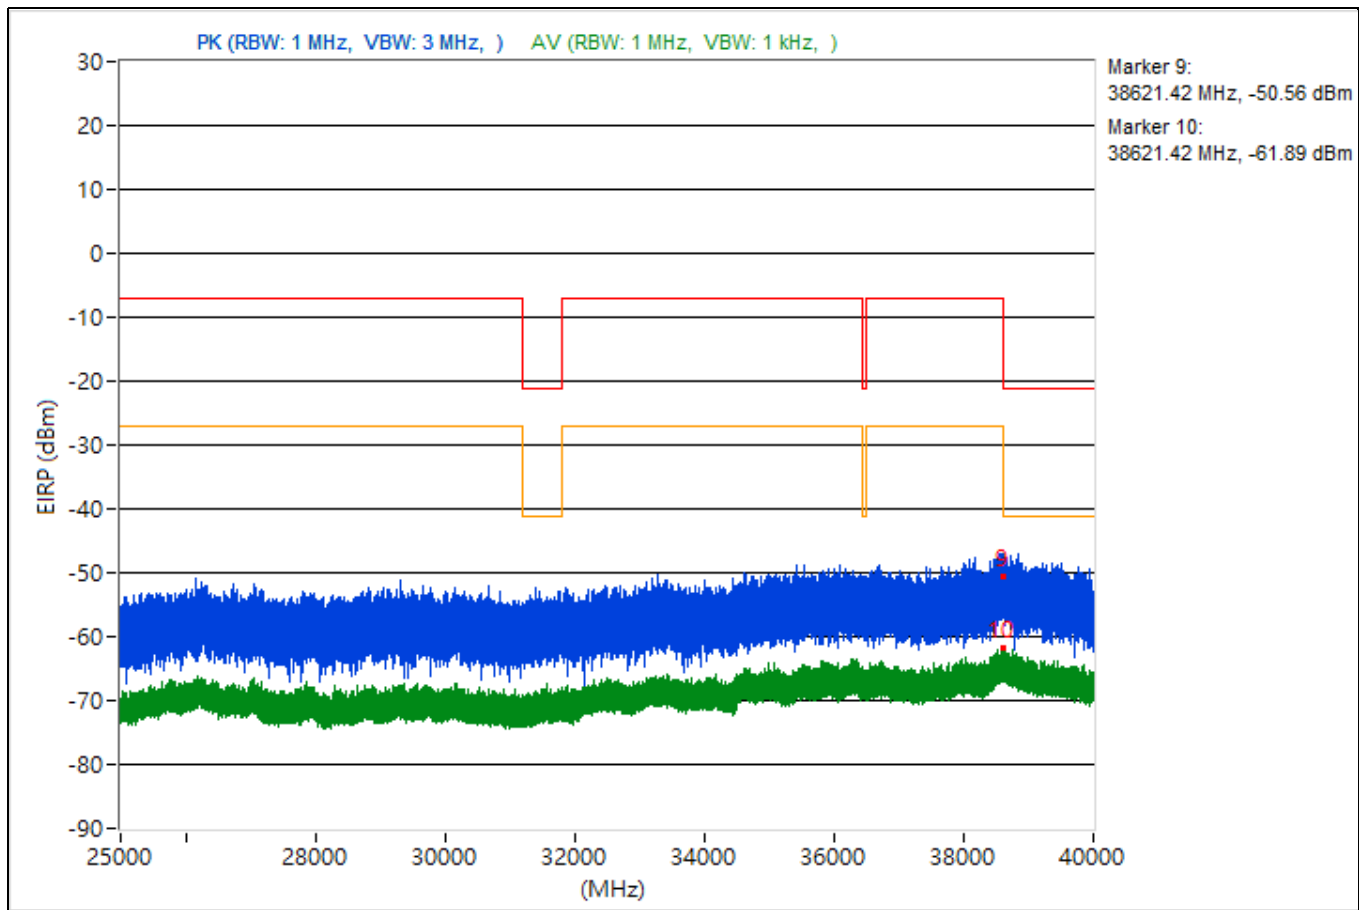


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5144.86	44.98 PK	74	-29.02	-55.2	4.92	-50.28
2	5144.86	35.82 AV	54	-18.18	-64.36	4.92	-59.44
3	11903.47	43.57 PK	74	-30.43	-56.61	4.92	-51.69
4	11903.47	34.79 AV	54	-19.21	-65.39	4.92	-60.47
5	19339.8	46.21 PK	74	-27.79	-53.97	4.92	-49.05
6	19339.8	36.1 AV	54	-17.9	-64.08	4.92	-59.16
7	23903.1	44.53 PK	74	-29.47	-55.65	4.92	-50.73
8	23903.1	37.25 AV	54	-16.75	-62.93	4.92	-58.01
9	38607.82	42.22 PK	74	-31.78	-57.96	4.92	-53.04
10	38607.82	33.36 AV	54	-20.64	-66.82	4.92	-61.9

Note: Margin value = Emission Level - Limit value

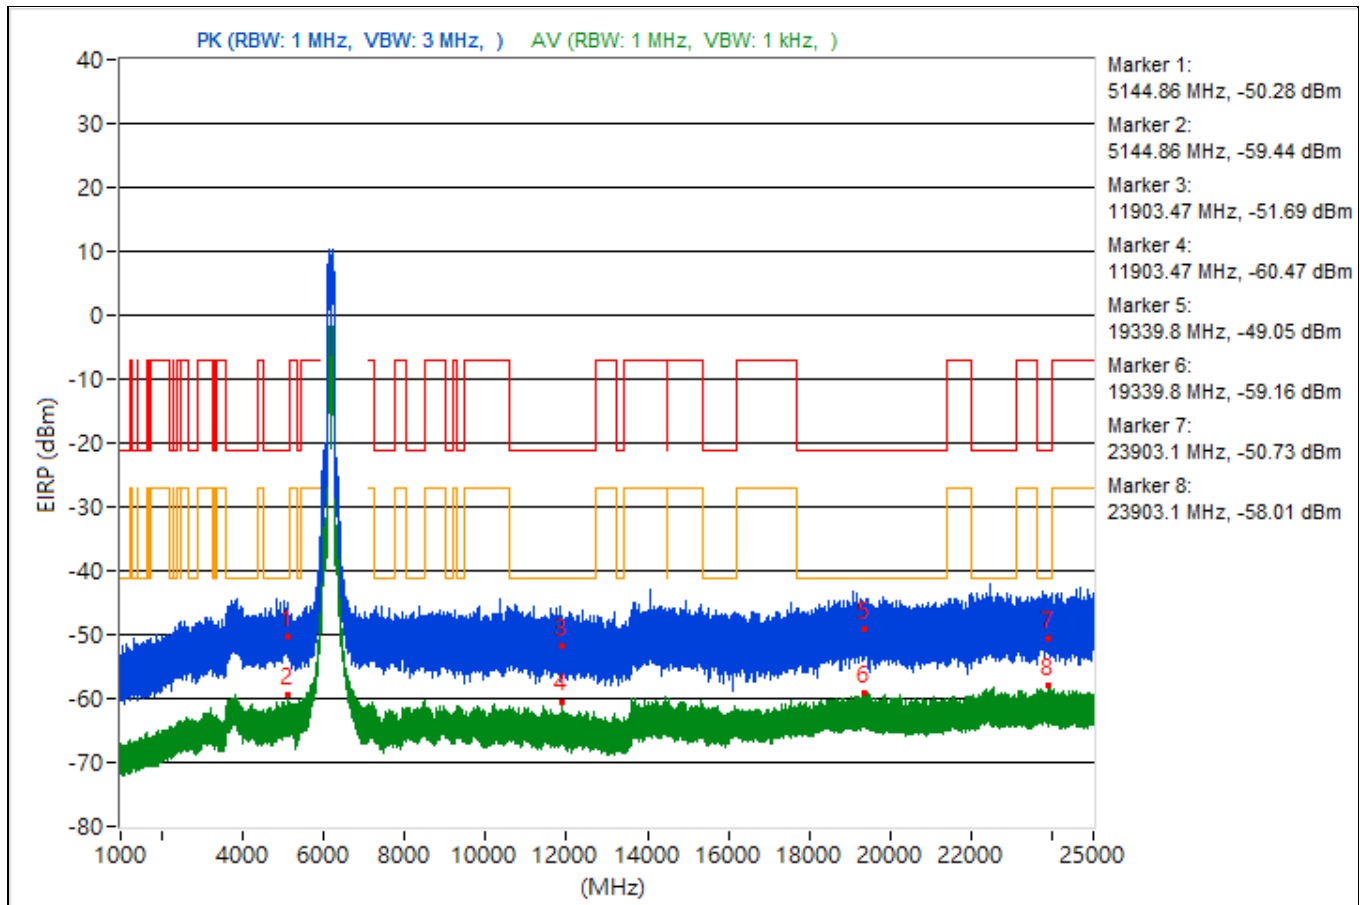


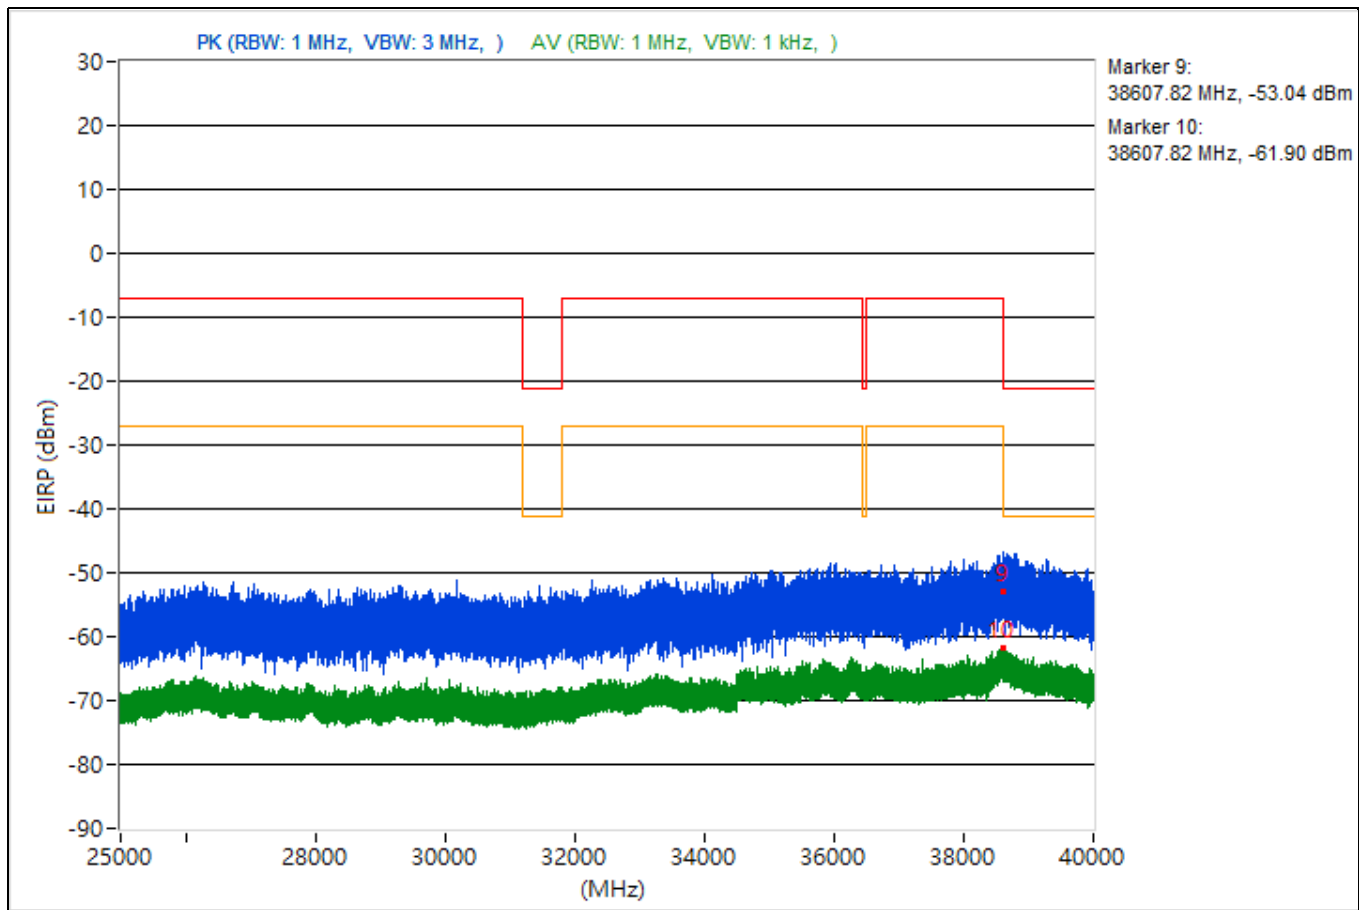


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.12	46.32 PK	74	-27.68	-53.86	4.92	-48.94
2	3790.12	36.03 AV	54	-17.97	-64.15	4.92	-59.23
3	15355.38	47.14 PK	74	-26.86	-53.04	4.92	-48.12
4	15355.38	34.64 AV	54	-19.36	-65.54	4.92	-60.62
5	19071	43.14 PK	74	-30.86	-57.04	4.92	-52.12
6	19071	36.93 AV	54	-17.07	-63.25	4.92	-58.33
7	23761.5	46.2 PK	74	-27.8	-53.98	4.92	-49.06
8	23761.5	36.78 AV	54	-17.22	-63.4	4.92	-58.48
9	38648.8	41.41 PK	74	-32.59	-58.77	4.92	-53.85
10	38648.8	33.82 AV	54	-20.18	-66.36	4.92	-61.44

Note: Margin value = Emission Level - Limit value

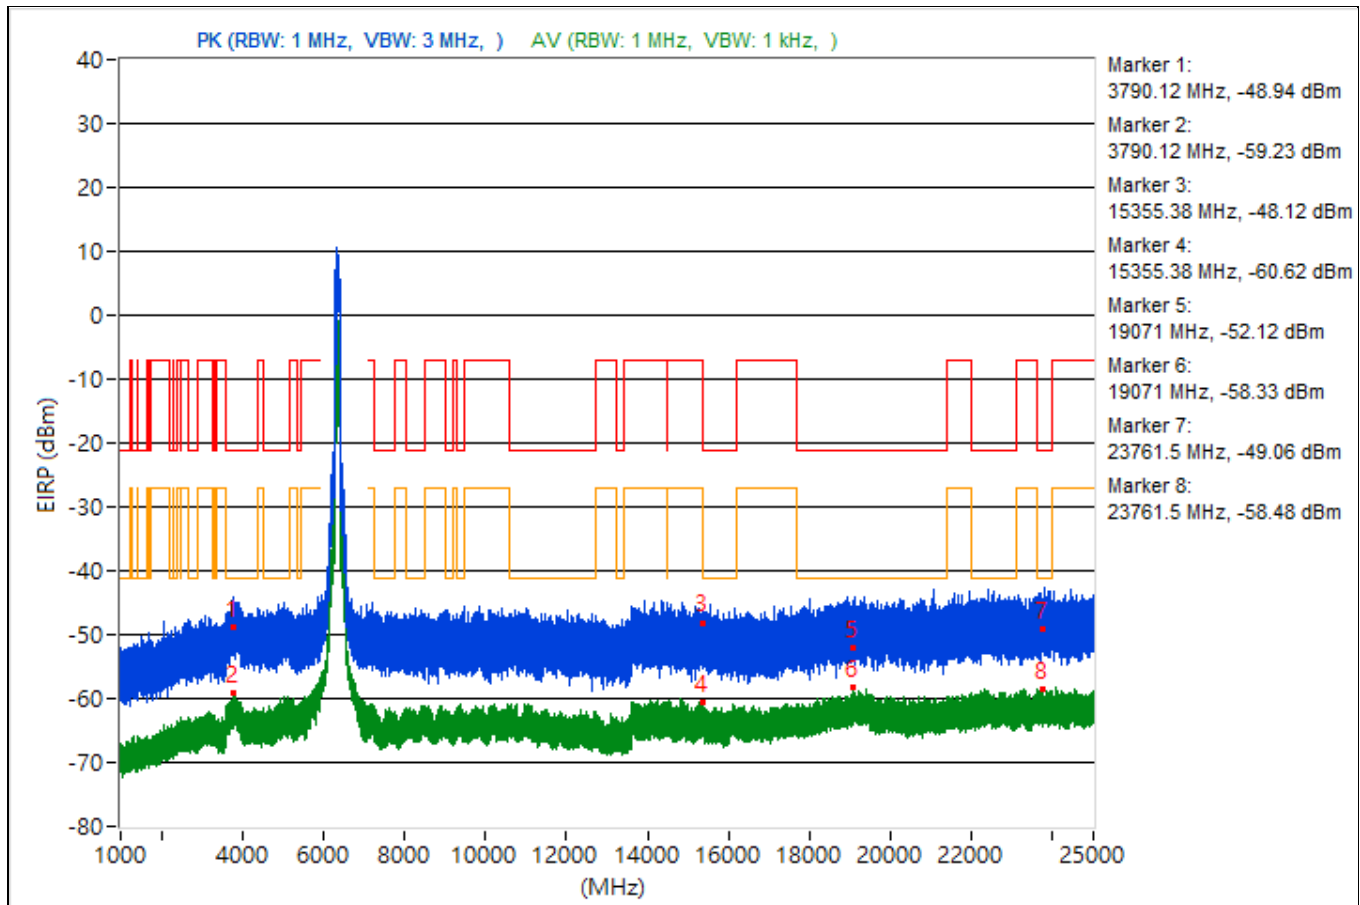


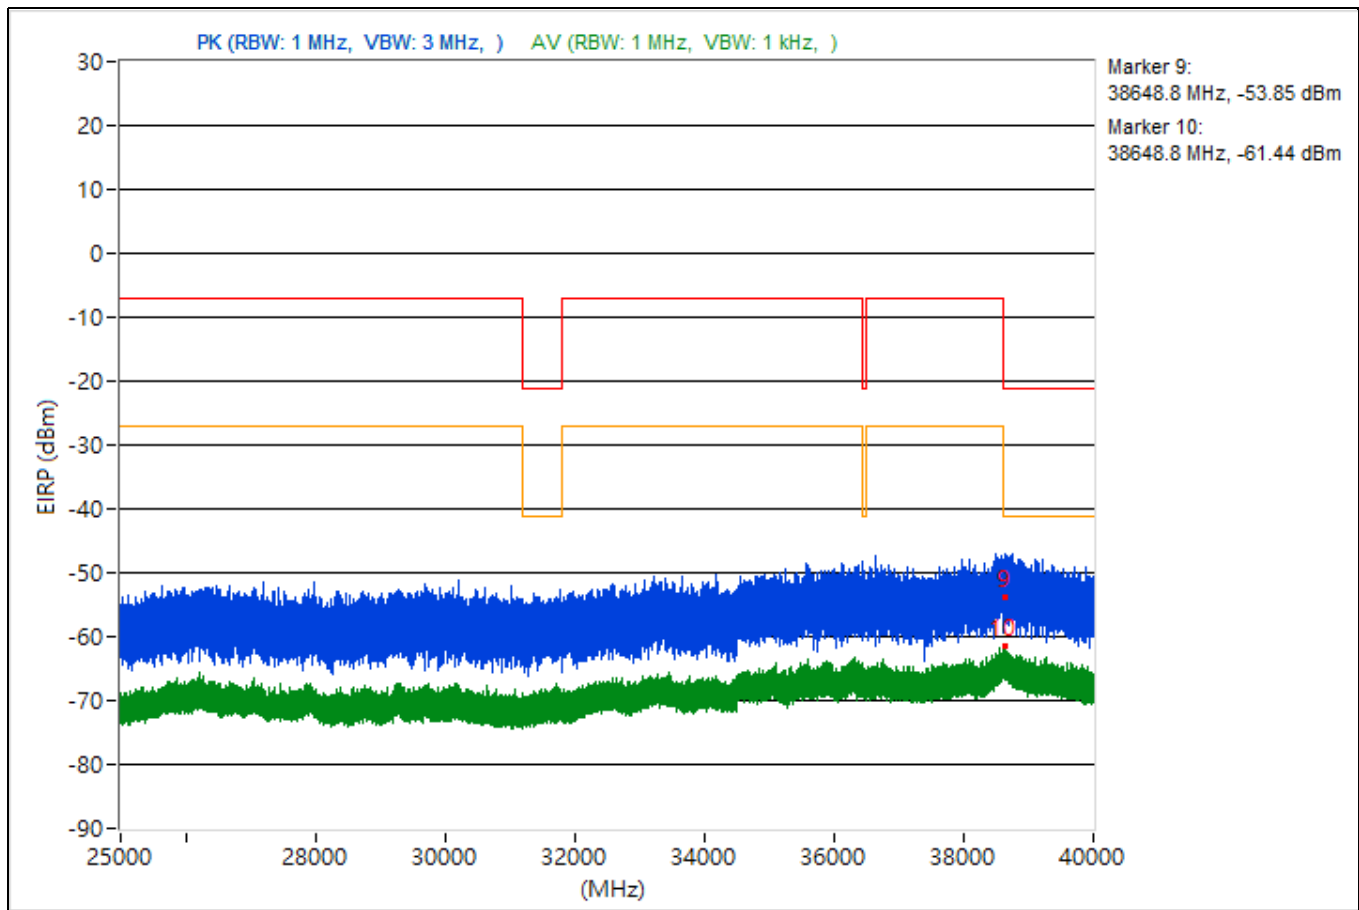


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4849.22	45.51 PK	74	-28.49	-54.67	4.92	-49.75
2	4849.22	35.93 AV	54	-18.07	-64.25	4.92	-59.33
3	14476.98	40.98 PK	74	-33.02	-59.2	4.92	-54.28
4	14476.98	34.78 AV	54	-19.22	-65.4	4.92	-60.48
5	19172.2	46.07 PK	74	-27.93	-54.11	4.92	-49.19
6	19172.2	35.79 AV	54	-18.21	-64.39	4.92	-59.47
7	23911.8	48.53 PK	74	-25.47	-51.65	4.92	-46.73
8	23911.8	37.18 AV	54	-16.82	-63	4.92	-58.08
9	38601.69	42.08 PK	74	-31.92	-58.1	4.92	-53.18
10	38601.69	33.33 AV	54	-20.67	-66.85	4.92	-61.93

Note: Margin value = Emission Level - Limit value

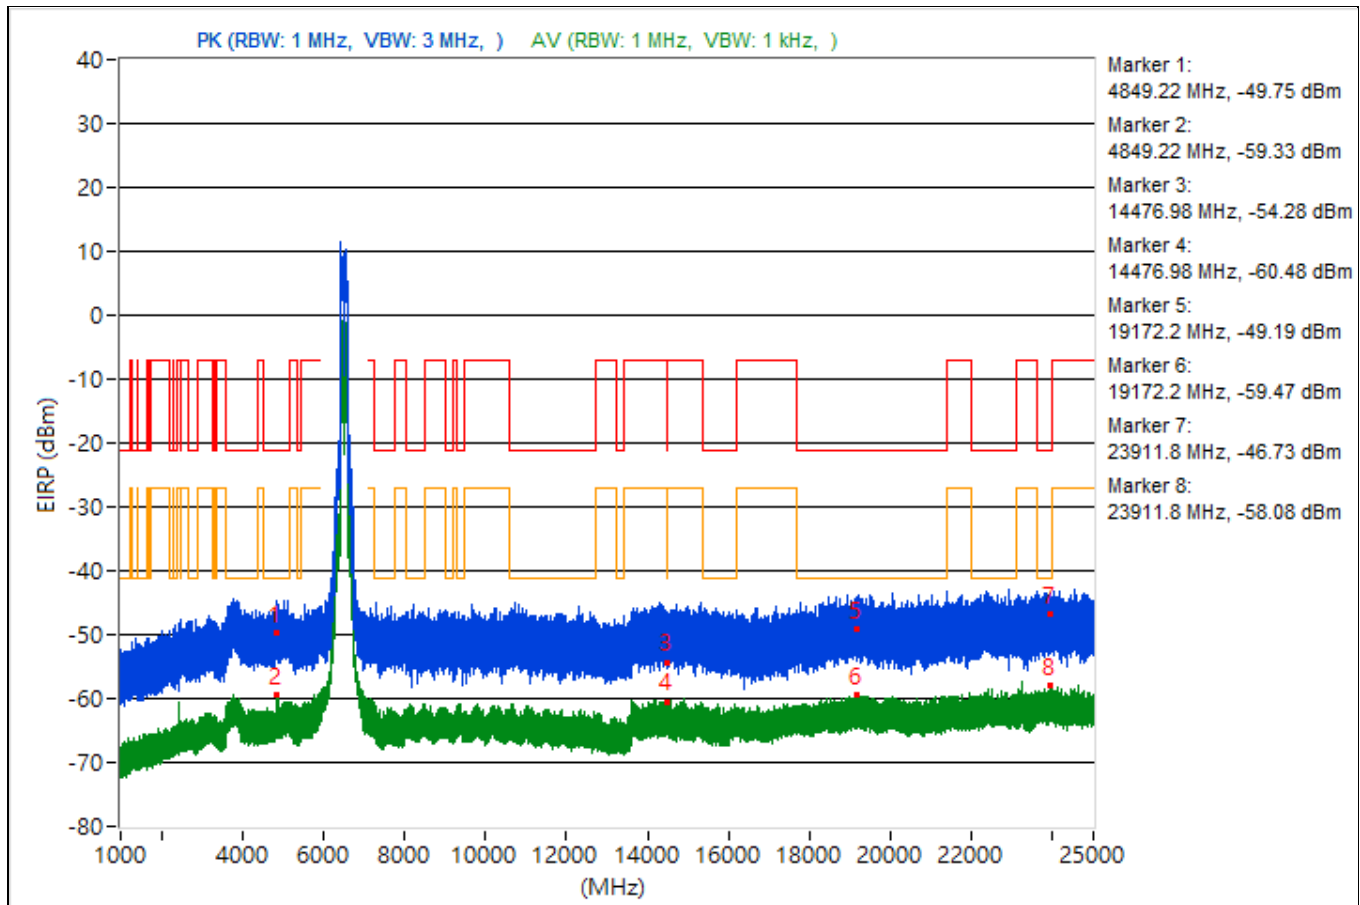


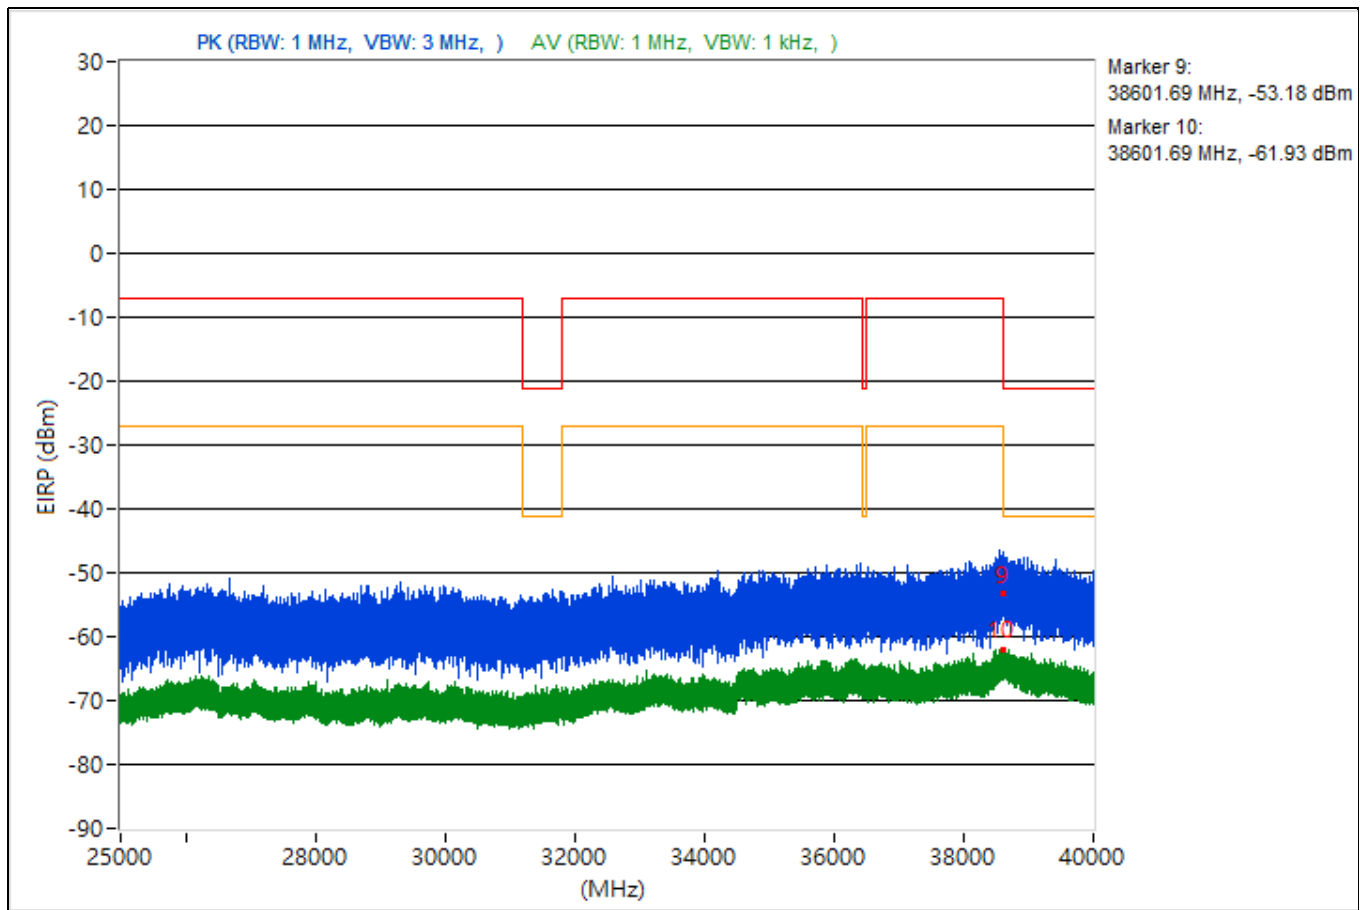


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.91	45.72 PK	74	-28.28	-54.46	4.92	-49.54
2	3777.91	35.37 AV	54	-18.63	-64.81	4.92	-59.89
3	14480.09	45.25 PK	74	-28.75	-54.93	4.92	-50.01
4	14480.09	35.01 AV	54	-18.99	-65.17	4.92	-60.25
5	19206.8	45.32 PK	74	-28.68	-54.86	4.92	-49.94
6	19206.8	36.39 AV	54	-17.61	-63.79	4.92	-58.87
7	22408.1	47.28 PK	74	-26.72	-52.9	4.92	-47.98
8	22408.1	37.23 AV	54	-16.77	-62.95	4.92	-58.03
9	38610.49	40.36 PK	74	-33.64	-59.82	4.92	-54.9
10	38610.49	33.74 AV	54	-20.26	-66.44	4.92	-61.52

Note: Margin value = Emission Level - Limit value

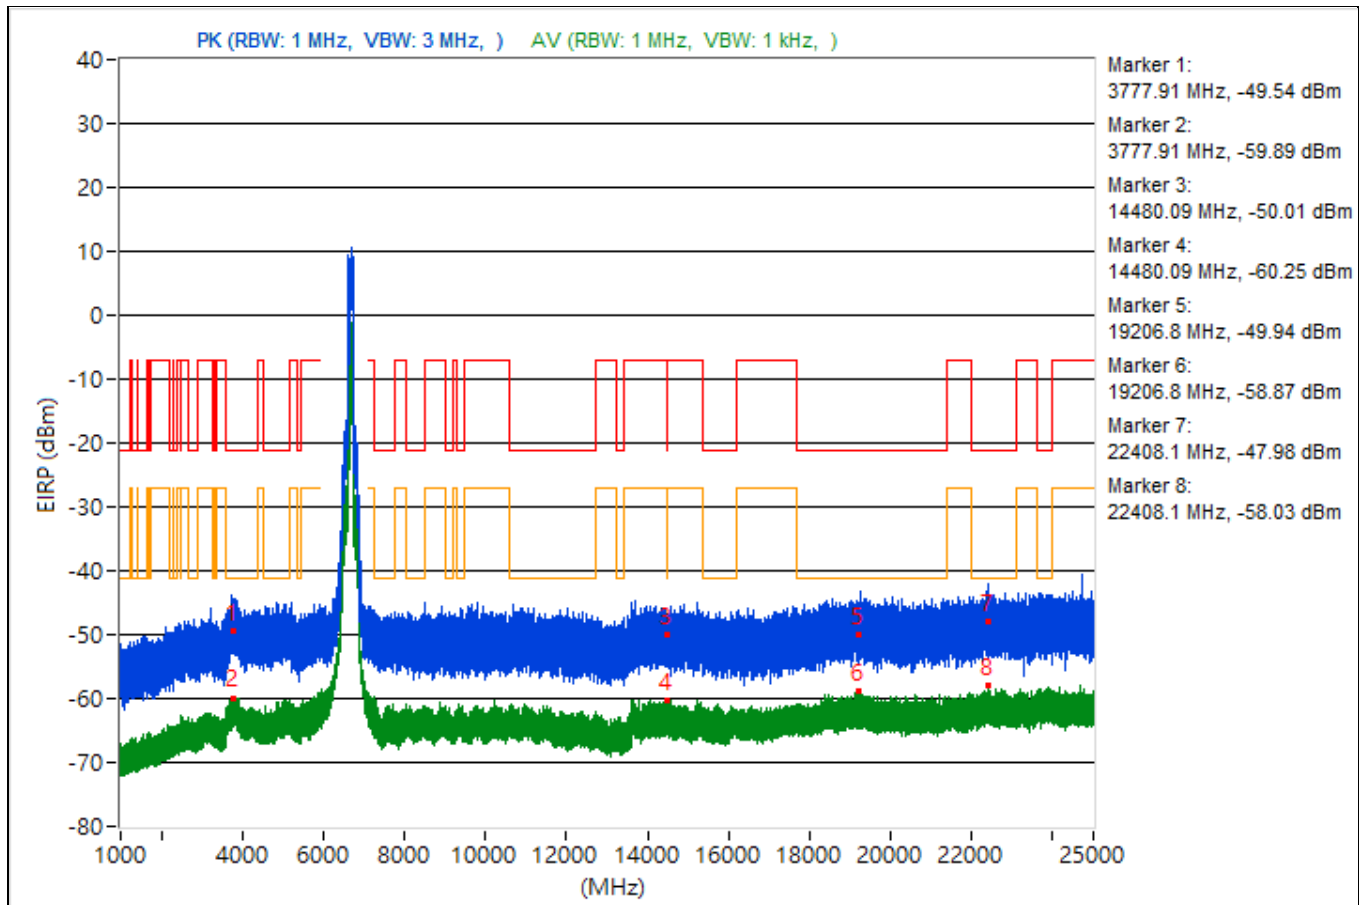


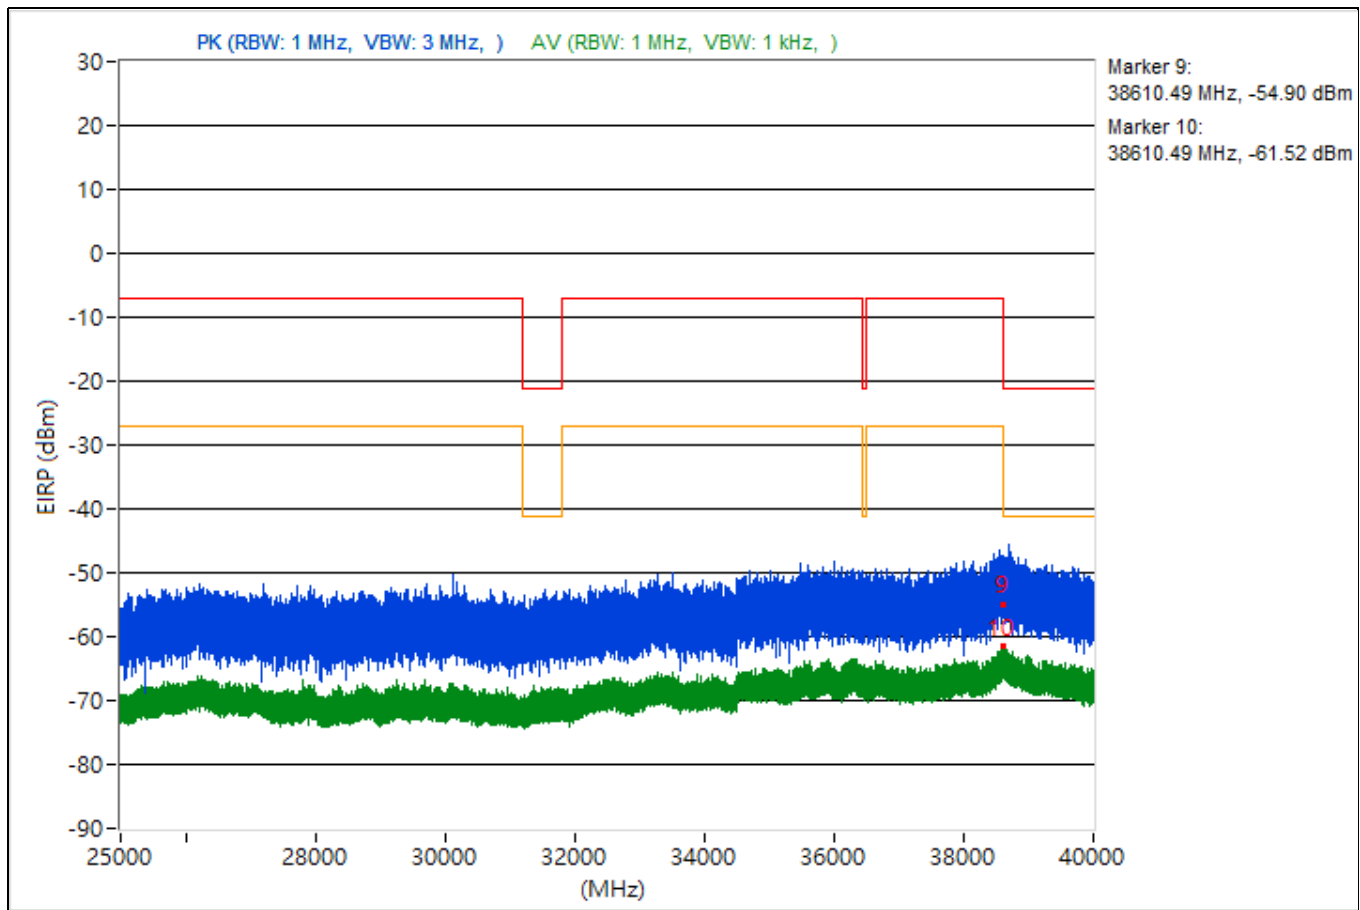


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.36	48.11 PK	74	-25.89	-52.07	4.92	-47.15
2	3797.36	35.66 AV	54	-18.34	-64.52	4.92	-59.6
3	7261.58	42.9 PK	74	-31.1	-57.28	4.92	-52.36
4	7261.58	35.96 AV	54	-18.04	-64.22	4.92	-59.3
5	19442.6	47.28 PK	74	-26.72	-52.9	4.92	-47.98
6	19442.6	36.25 AV	54	-17.75	-63.93	4.92	-59.01
7	23683.1	45.16 PK	74	-28.84	-55.02	4.92	-50.1
8	23683.1	37.5 AV	54	-16.5	-62.68	4.92	-57.76
9	38660.8	46.29 PK	74	-27.71	-53.89	4.92	-48.97
10	38660.8	33.6 AV	54	-20.4	-66.58	4.92	-61.66

Note: Margin value = Emission Level - Limit value

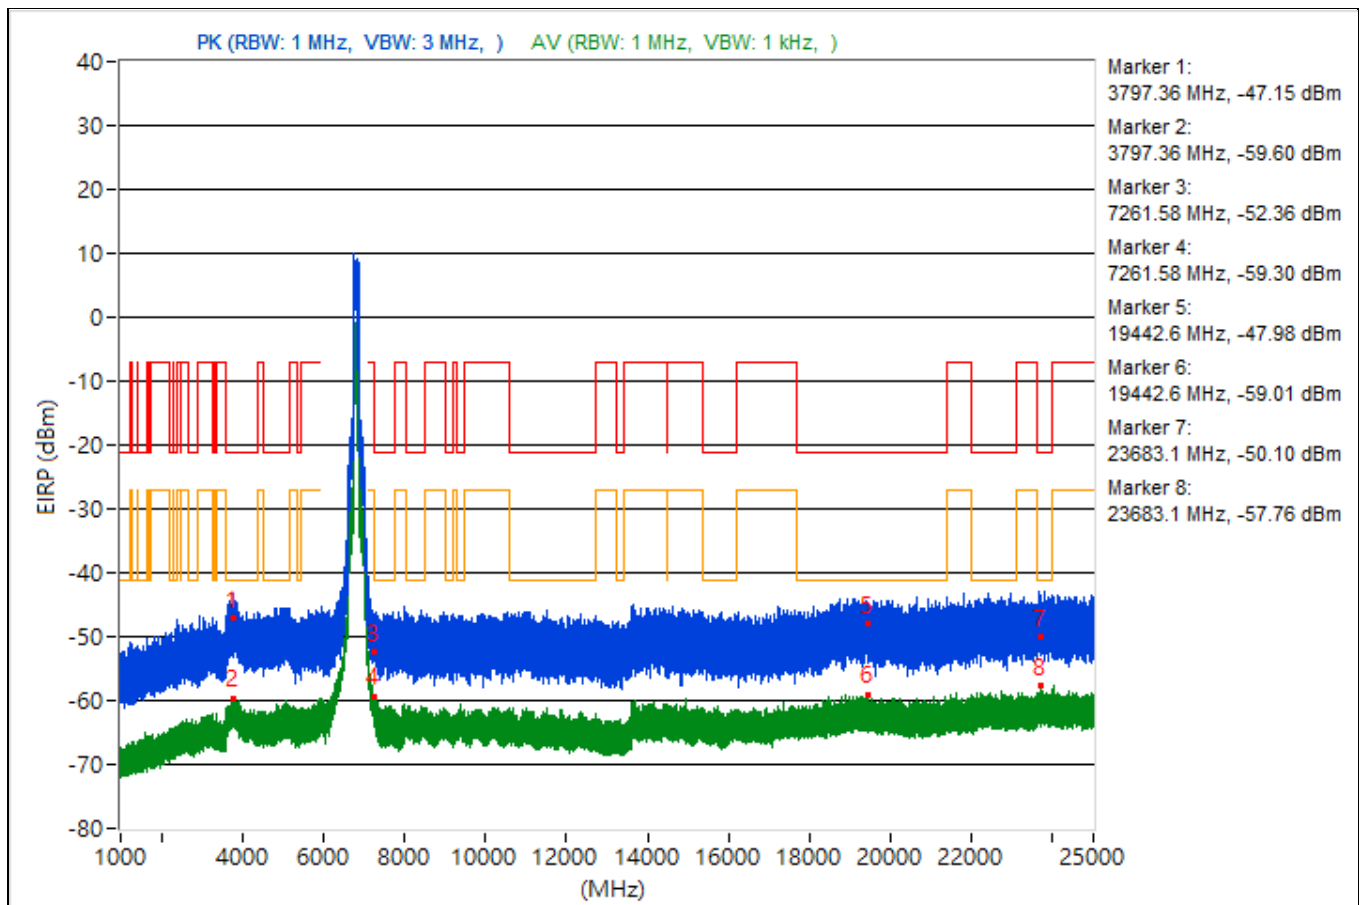


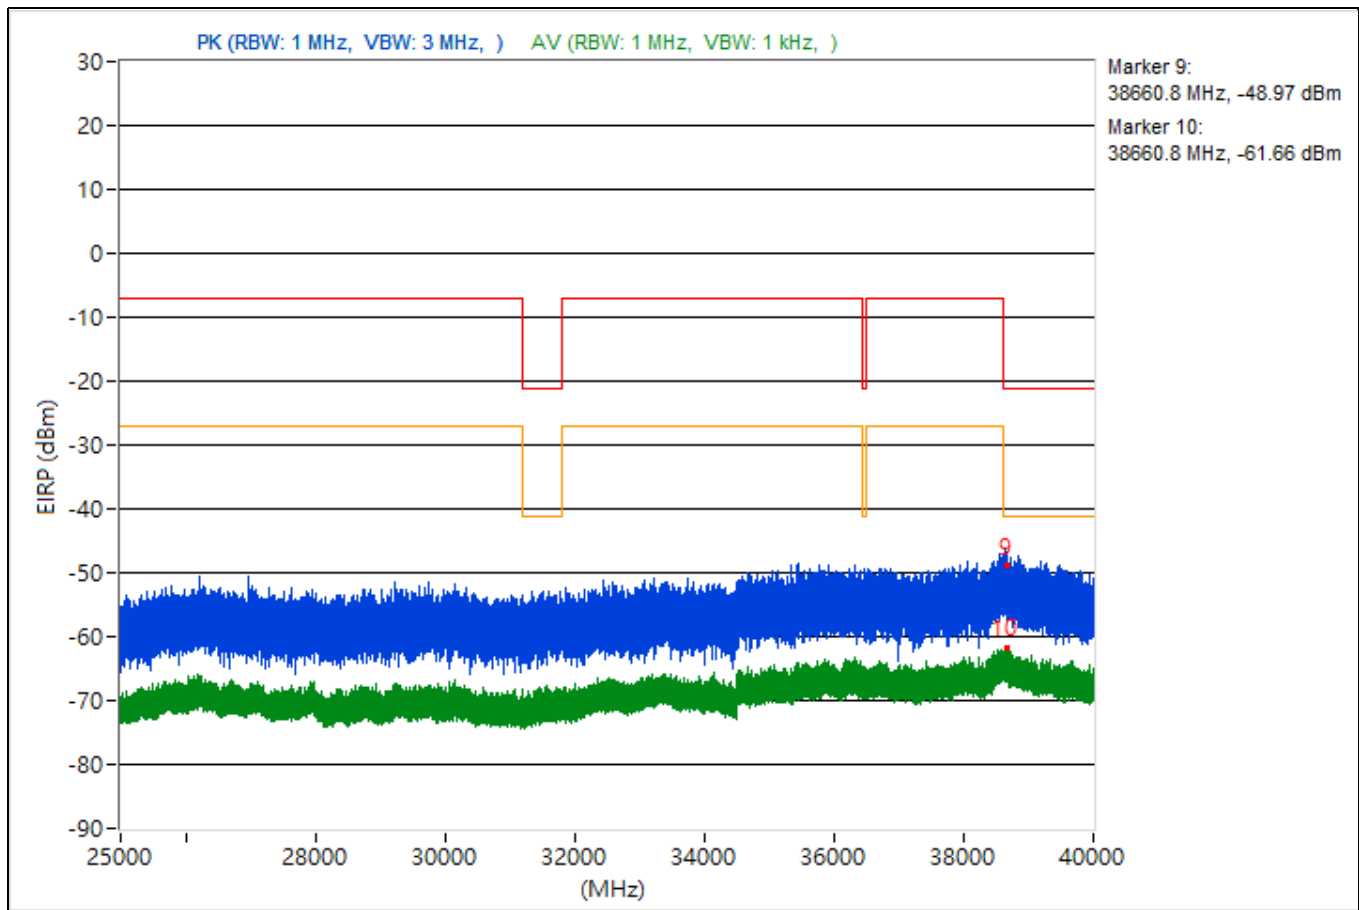


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.31	46.73 PK	74	-27.27	-53.45	4.92	-48.53
2	3814.31	35.59 AV	54	-18.41	-64.59	4.92	-59.67
3	7259.09	47.04 PK	74	-26.96	-53.14	4.92	-48.22
4	7259.09	39.65 AV	54	-14.35	-60.53	4.92	-55.61
5	18978.3	47.59 PK	74	-26.41	-52.59	4.92	-47.67
6	18978.3	36.11 AV	54	-17.89	-64.07	4.92	-59.15
7	23927.8	44.93 PK	74	-29.07	-55.25	4.92	-50.33
8	23927.8	37.14 AV	54	-16.86	-63.04	4.92	-58.12
9	38629.87	42.5 PK	74	-31.5	-57.68	4.92	-52.76
10	38629.87	33.31 AV	54	-20.69	-66.87	4.92	-61.95

Note: Margin value = Emission Level - Limit value

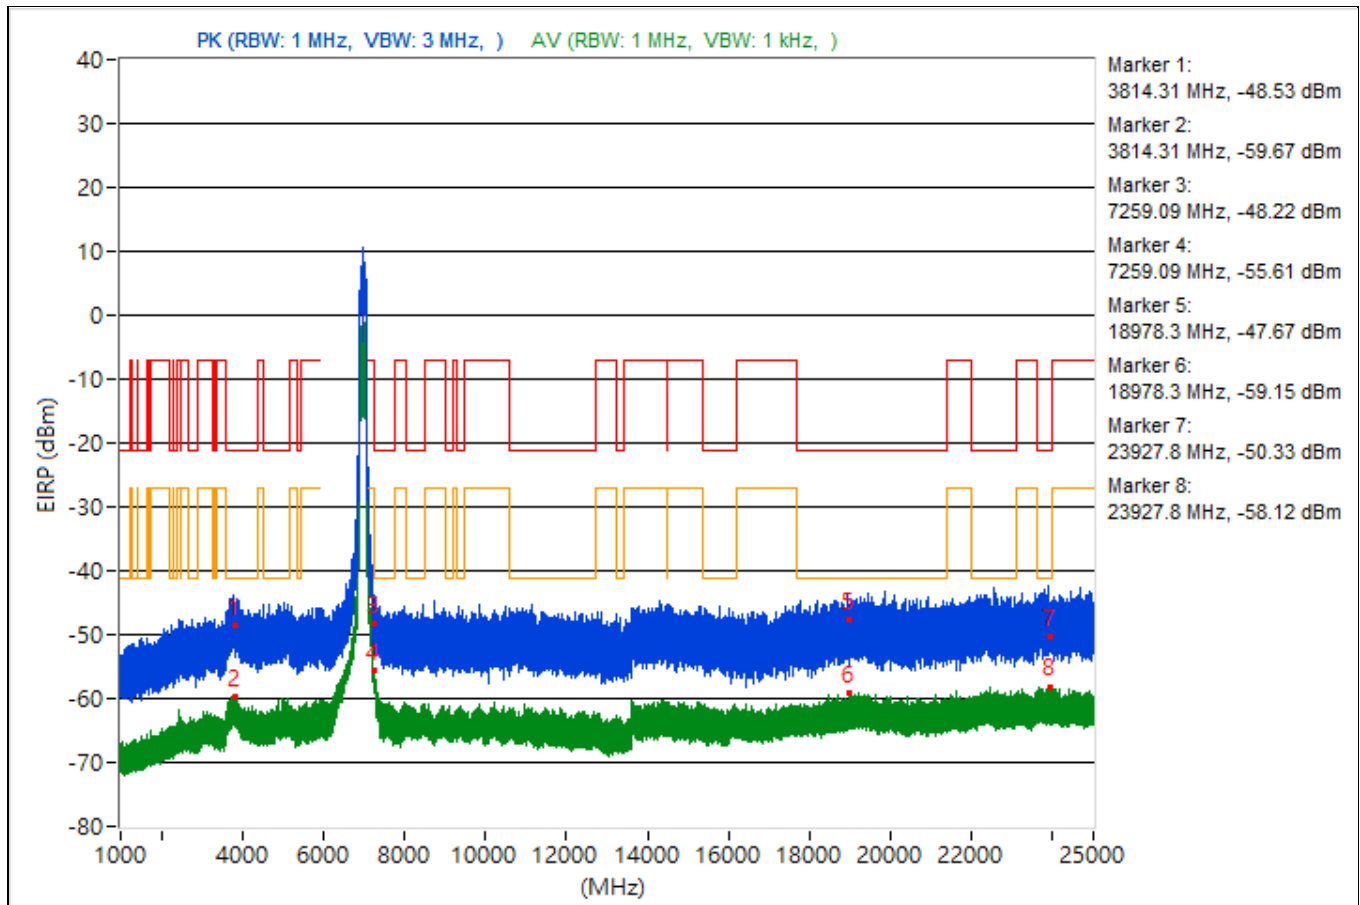


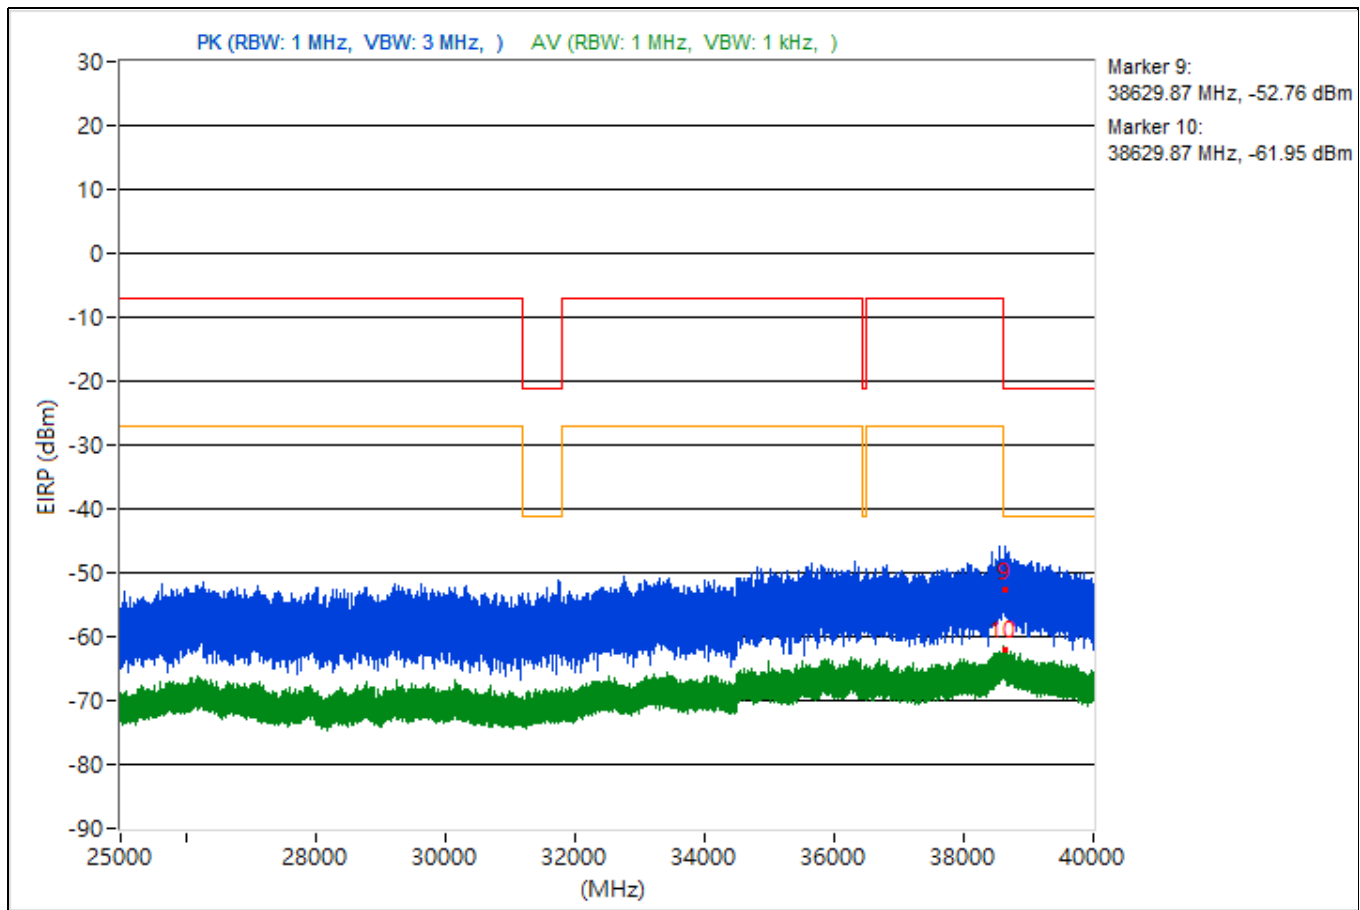


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3748.04	48.39 PK	74	-25.61	-51.79	4.92	-46.87
2	3748.04	37.35 AV	54	-16.65	-62.83	4.92	-57.91
3	8477.24	47.19 PK	74	-26.81	-52.99	4.92	-48.07
4	8477.24	35.83 AV	54	-18.17	-64.35	4.92	-59.43
5	19246.7	43.05 PK	74	-30.95	-57.13	4.92	-52.21
6	19246.7	37.18 AV	54	-16.82	-63	4.92	-58.08
7	22465	49.16 PK	74	-24.84	-51.02	4.92	-46.1
8	22465	38.22 AV	54	-15.78	-61.96	4.92	-57.04
9	38610.13	45.98 PK	74	-28.02	-54.2	4.92	-49.28
10	38610.13	35 AV	54	-19	-65.18	4.92	-60.26

Note: Margin value = Emission Level - Limit value

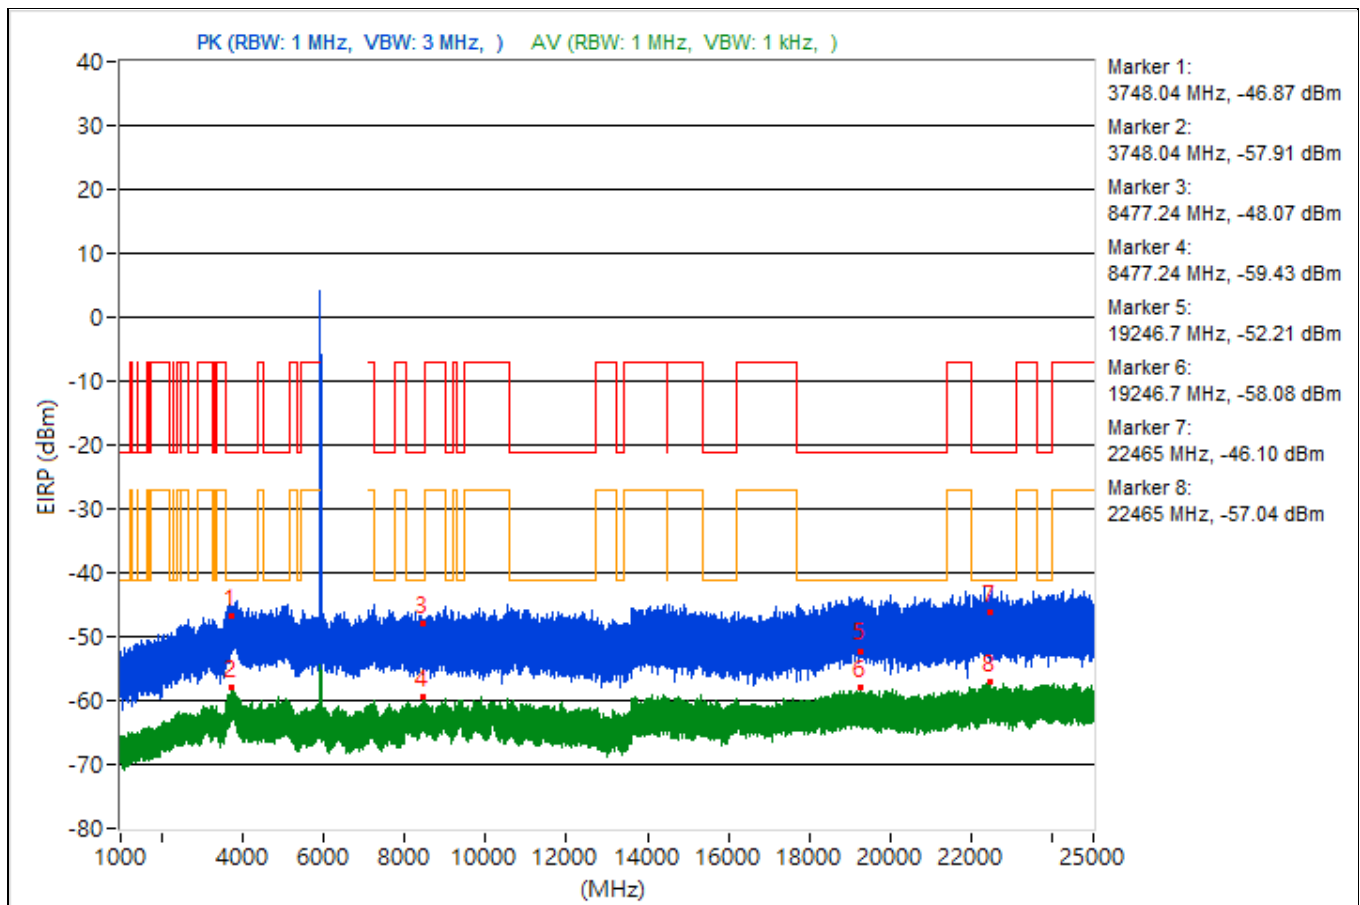


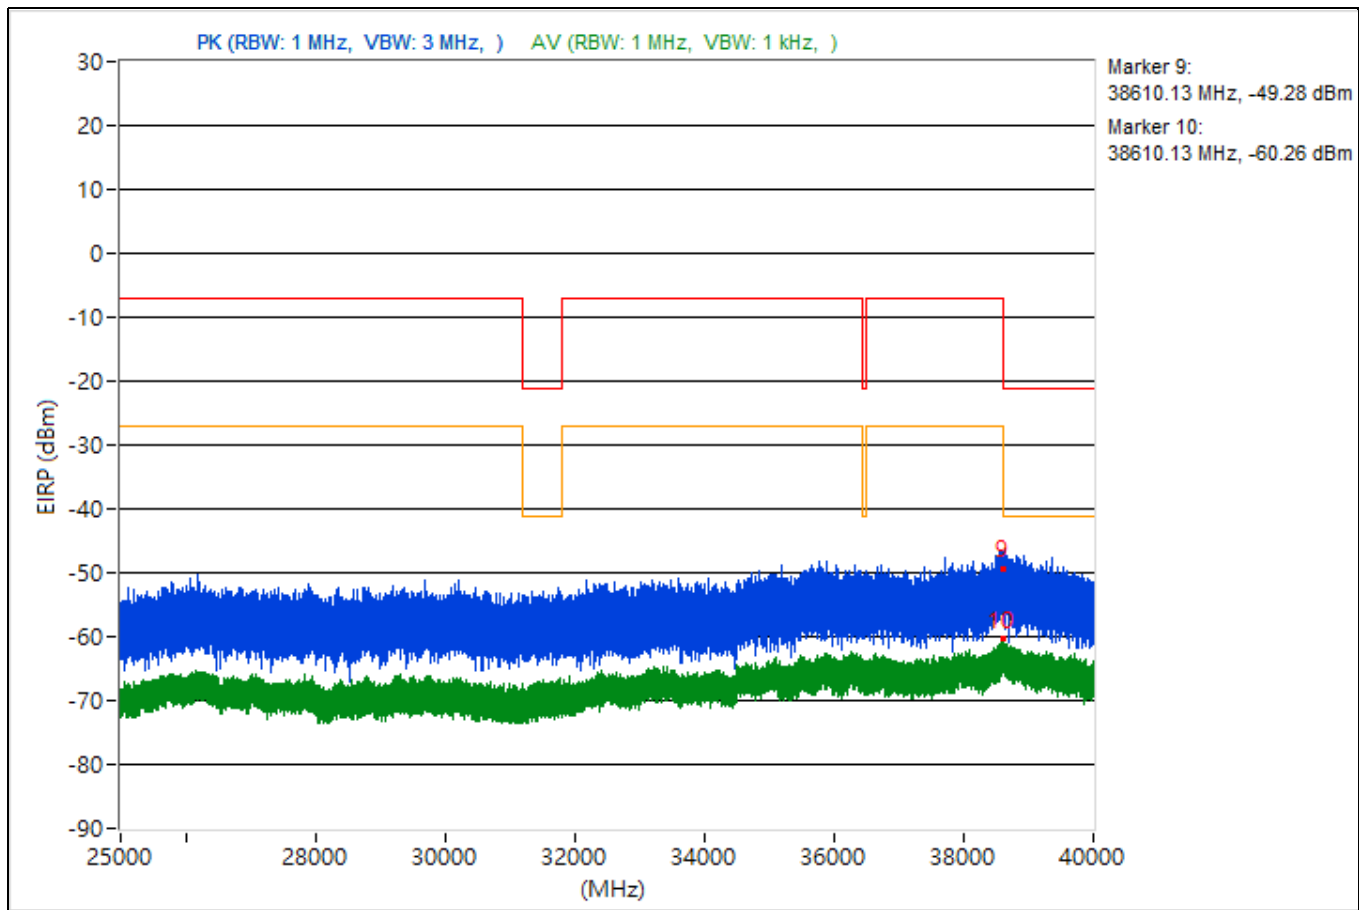


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.88	46.43 PK	74	-27.57	-53.75	4.92	-48.83
2	3809.88	37.06 AV	54	-16.94	-63.12	4.92	-58.2
3	14474.31	44.2 PK	74	-29.8	-55.98	4.92	-51.06
4	14474.31	35.73 AV	54	-18.27	-64.45	4.92	-59.53
5	19428	45.54 PK	74	-28.46	-54.64	4.92	-49.72
6	19428	37.43 AV	54	-16.57	-62.75	4.92	-57.83
7	23740.5	50.59 PK	74	-23.41	-49.59	4.92	-44.67
8	23740.5	38.33 AV	54	-15.67	-61.85	4.92	-56.93
9	38613.78	45.03 PK	74	-28.97	-55.15	4.92	-50.23
10	38613.78	34.59 AV	54	-19.41	-65.59	4.92	-60.67

Note: Margin value = Emission Level - Limit value

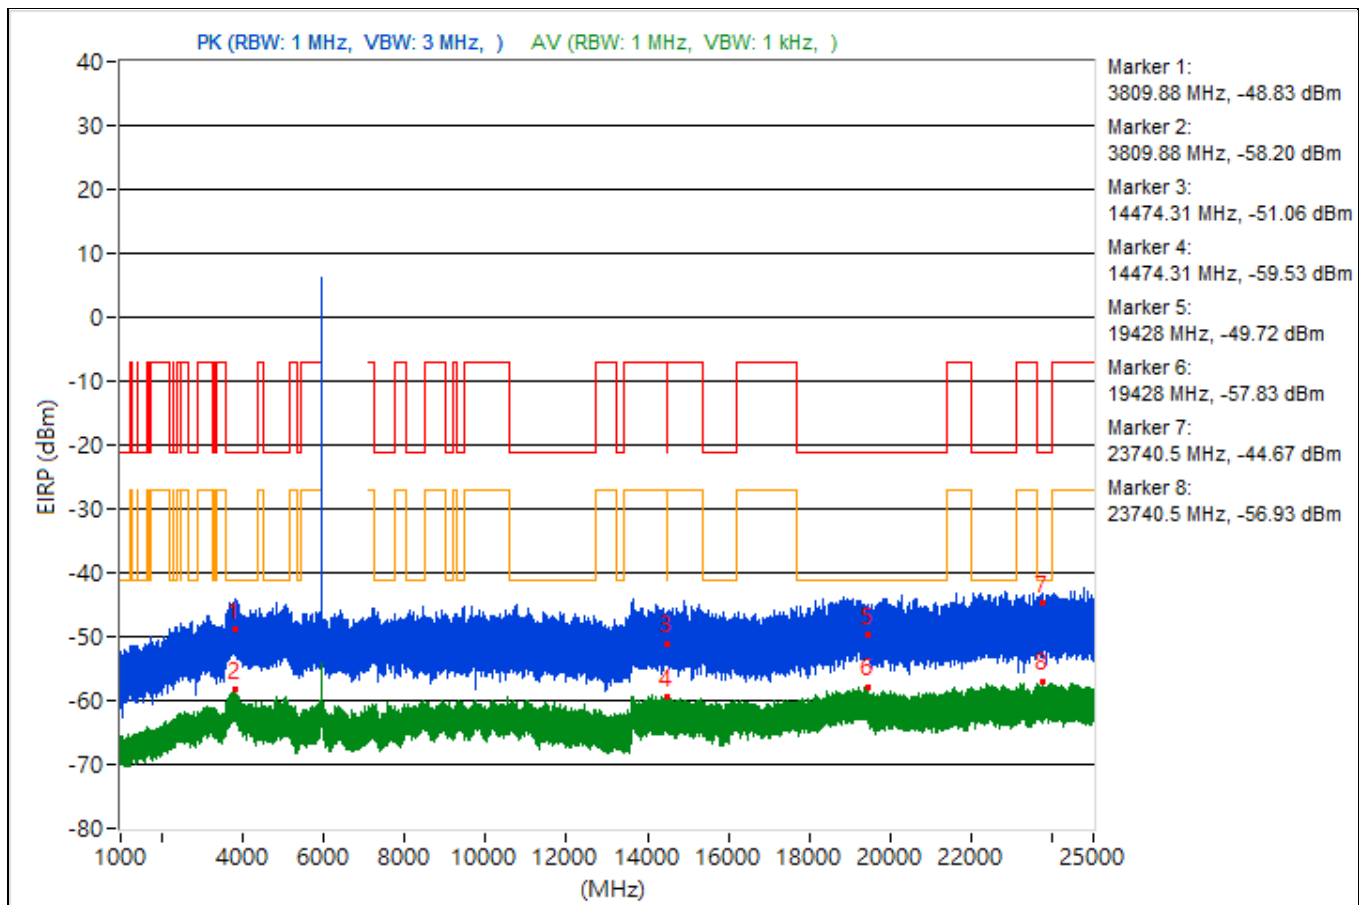


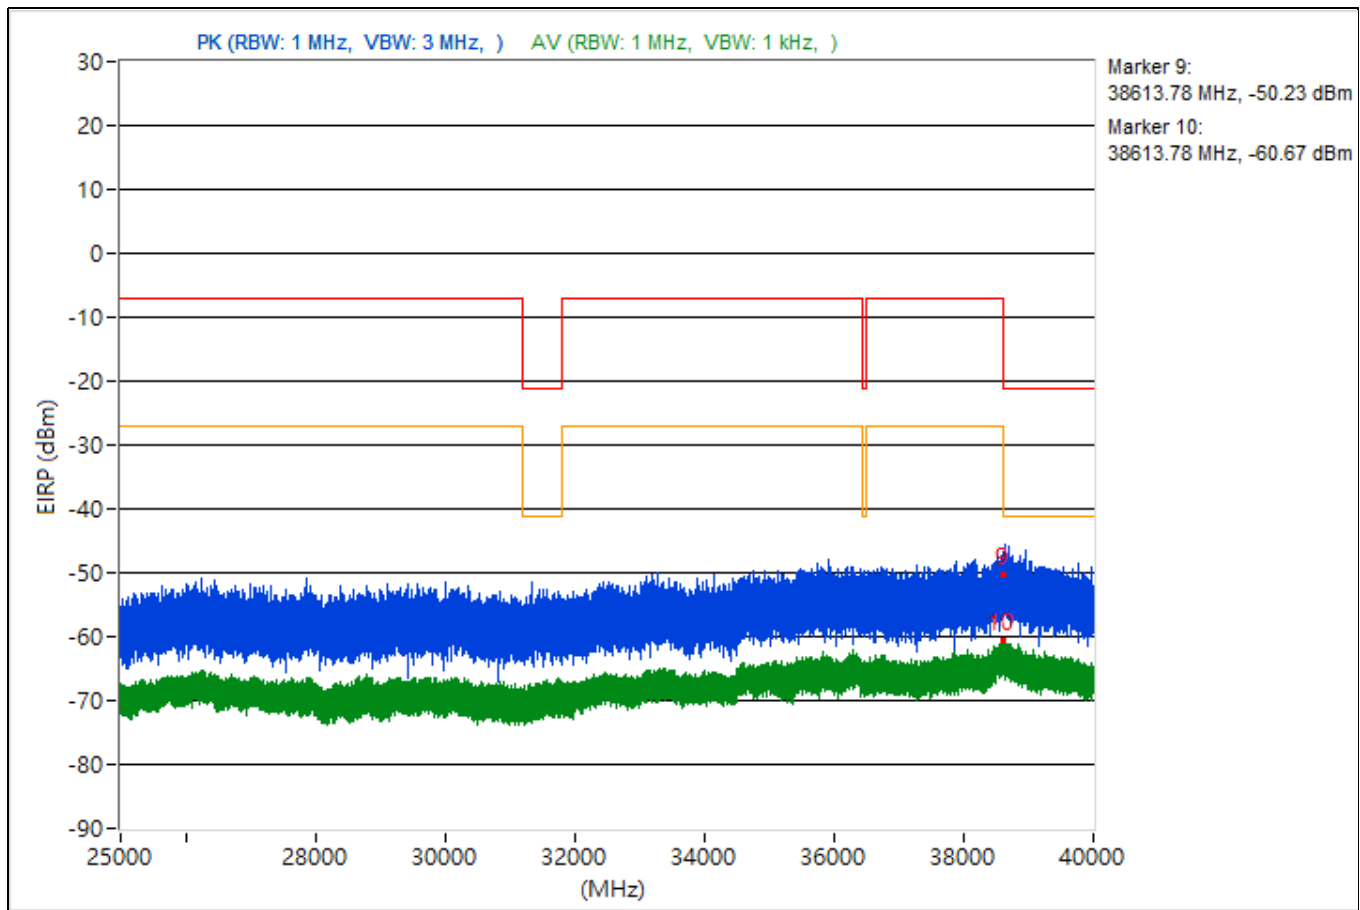


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.37	48.94 PK	74	-25.06	-51.24	4.92	-46.32
2	3812.37	36.94 AV	54	-17.06	-63.24	4.92	-58.32
3	14478.13	44.27 PK	74	-29.73	-55.91	4.92	-50.99
4	14478.13	35.86 AV	54	-18.14	-64.32	4.92	-59.4
5	20008.5	44.87 PK	74	-29.13	-55.31	4.92	-50.39
6	20008.5	37.26 AV	54	-16.74	-62.92	4.92	-58
7	23804.1	46.39 PK	74	-27.61	-53.79	4.92	-48.87
8	23804.1	38.54 AV	54	-15.46	-61.64	4.92	-56.72
9	38627.2	41.63 PK	74	-32.37	-58.55	4.92	-53.63
10	38627.2	34.59 AV	54	-19.41	-65.59	4.92	-60.67

Note: Margin value = Emission Level - Limit value

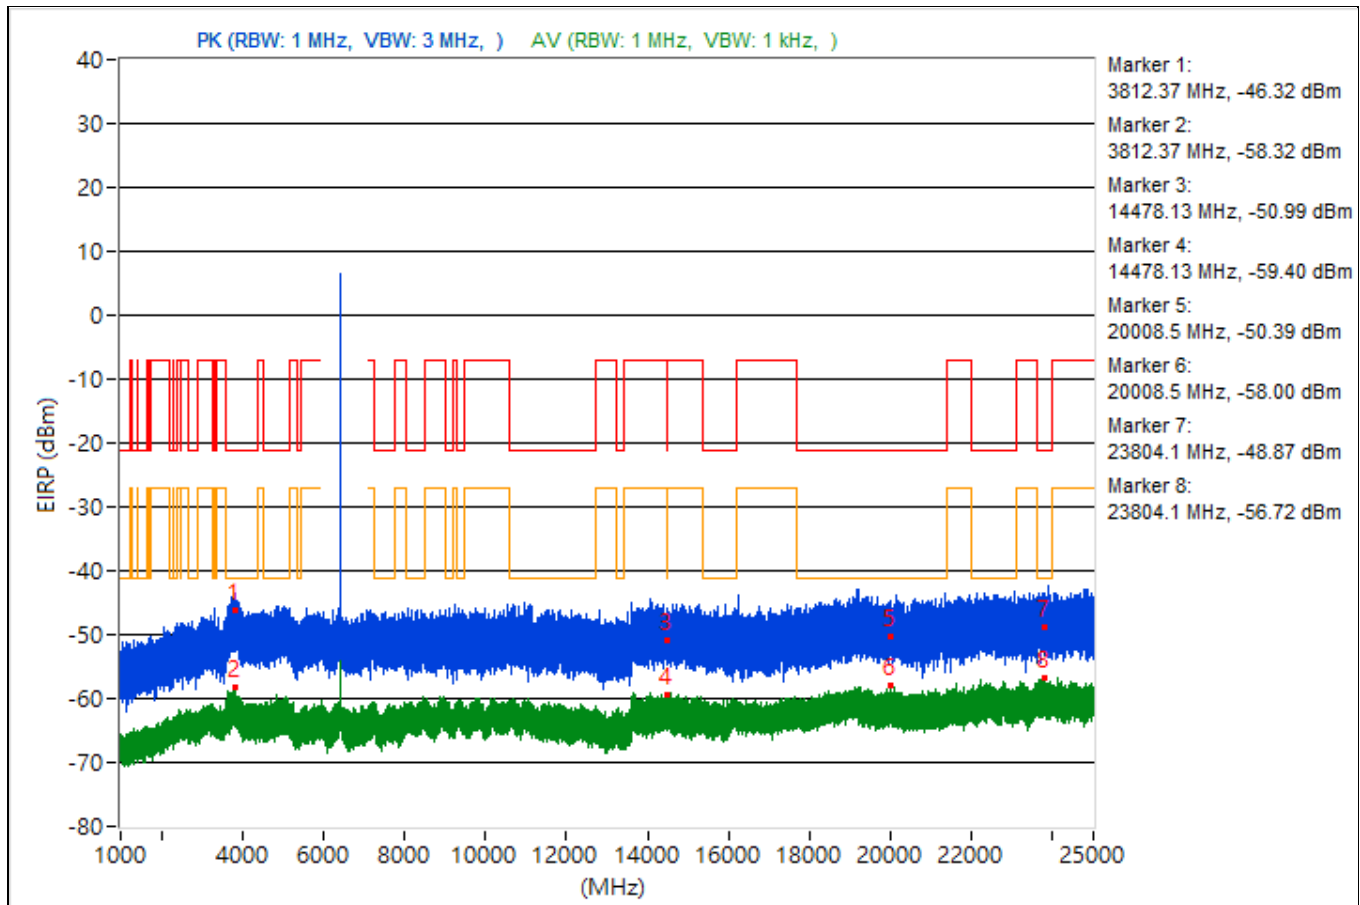


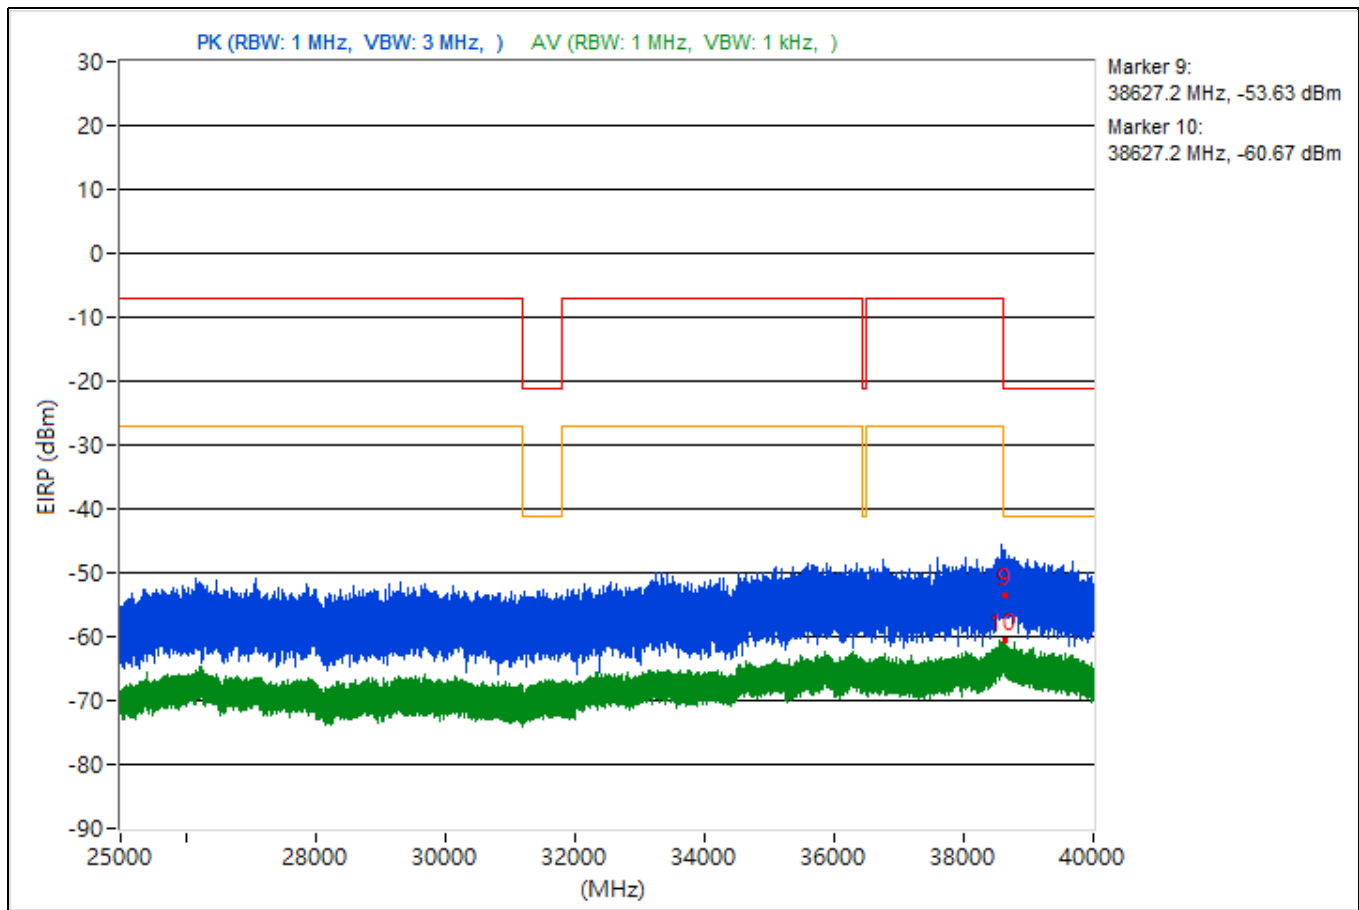


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.23	46.59 PK	74	-27.41	-53.59	4.92	-48.67
2	3772.23	36.94 AV	54	-17.06	-63.24	4.92	-58.32
3	7261.81	44.47 PK	74	-29.53	-55.71	4.92	-50.79
4	7261.81	35.36 AV	54	-18.64	-64.82	4.92	-59.9
5	19296.6	49.82 PK	74	-24.18	-50.36	4.92	-45.44
6	19296.6	37.06 AV	54	-16.94	-63.12	4.92	-58.2
7	23790.6	48.18 PK	74	-25.82	-52	4.92	-47.08
8	23790.6	38.01 AV	54	-15.99	-62.17	4.92	-57.25
9	38641.24	40.72 PK	74	-33.28	-59.46	4.92	-54.54
10	38641.24	34.28 AV	54	-19.72	-65.9	4.92	-60.98

Note: Margin value = Emission Level - Limit value

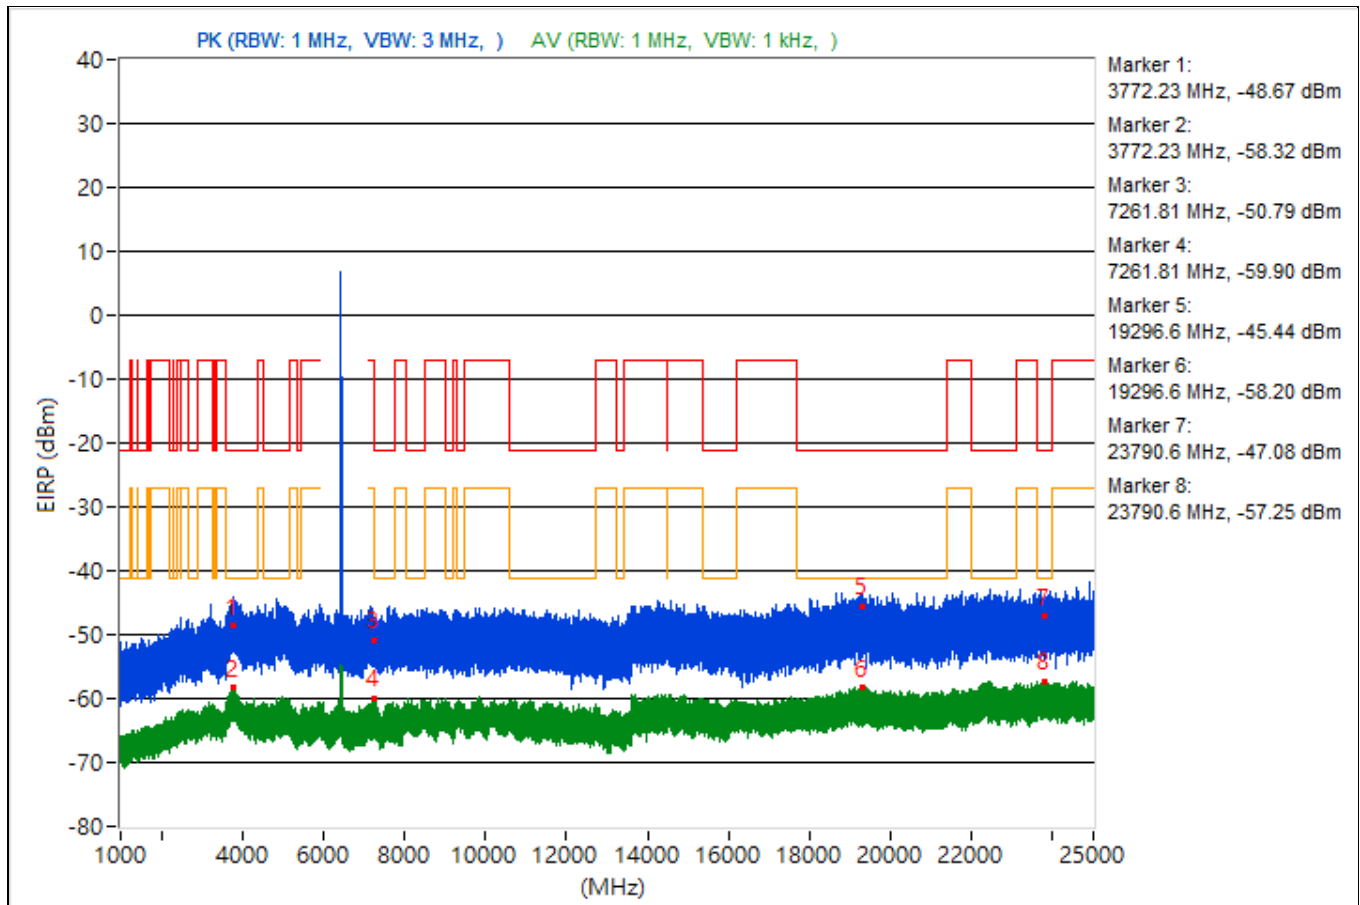


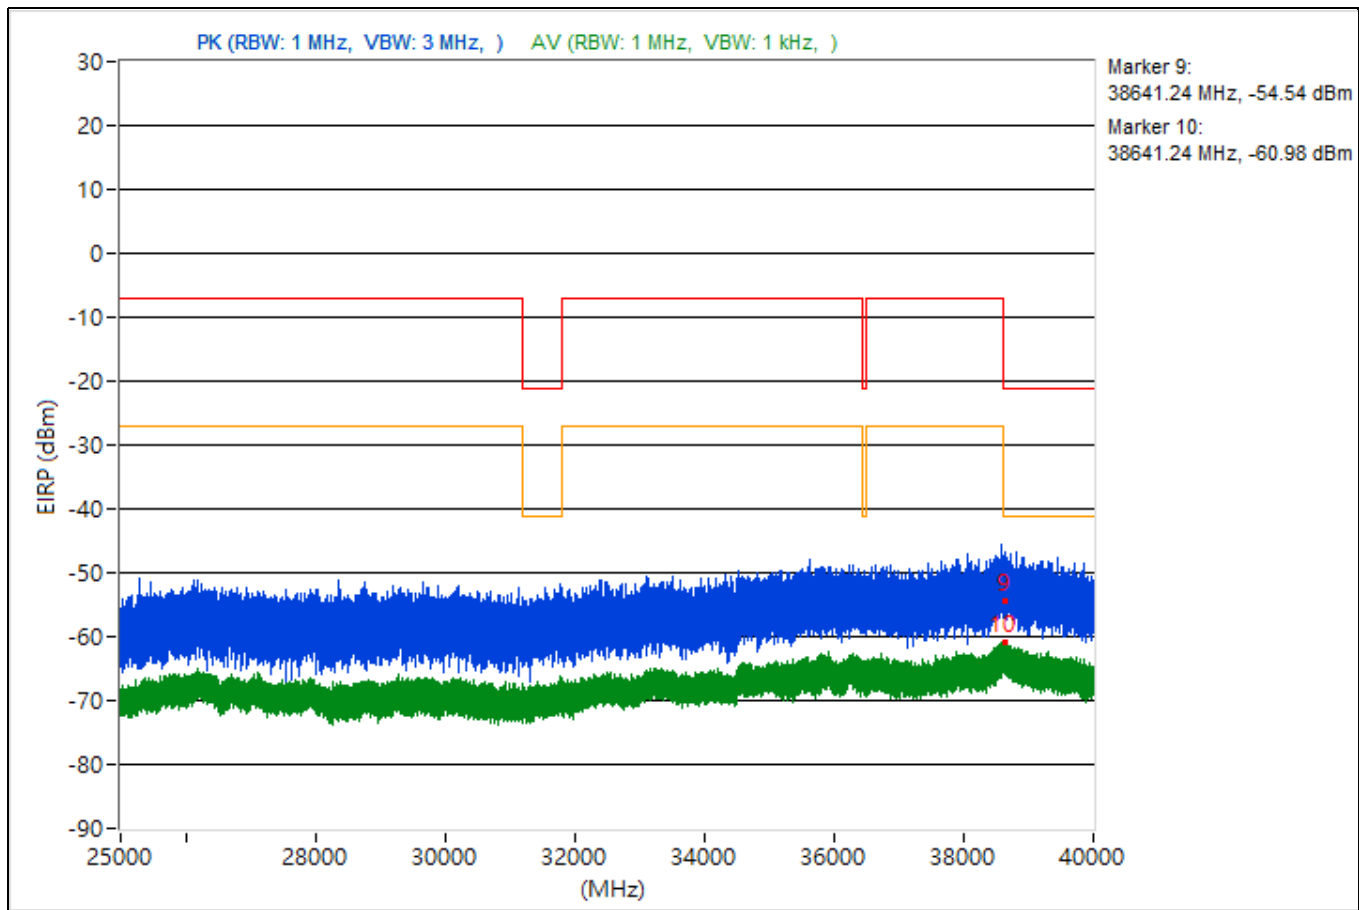


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.37	48.13 PK	74	-25.87	-52.05	4.92	-47.13
2	3742.37	37.12 AV	54	-16.88	-63.06	4.92	-58.14
3	14490.84	46.28 PK	74	-27.72	-53.9	4.92	-48.98
4	14490.84	35.82 AV	54	-18.18	-64.36	4.92	-59.44
5	18986.4	46.8 PK	74	-27.2	-53.38	4.92	-48.46
6	18986.4	37.19 AV	54	-16.81	-62.99	4.92	-58.07
7	23676.2	47.33 PK	74	-26.67	-52.85	4.92	-47.93
8	23676.2	38.54 AV	54	-15.46	-61.64	4.92	-56.72
9	38636.98	43.56 PK	74	-30.44	-56.62	4.92	-51.7
10	38636.98	34.37 AV	54	-19.63	-65.81	4.92	-60.89

Note: Margin value = Emission Level - Limit value

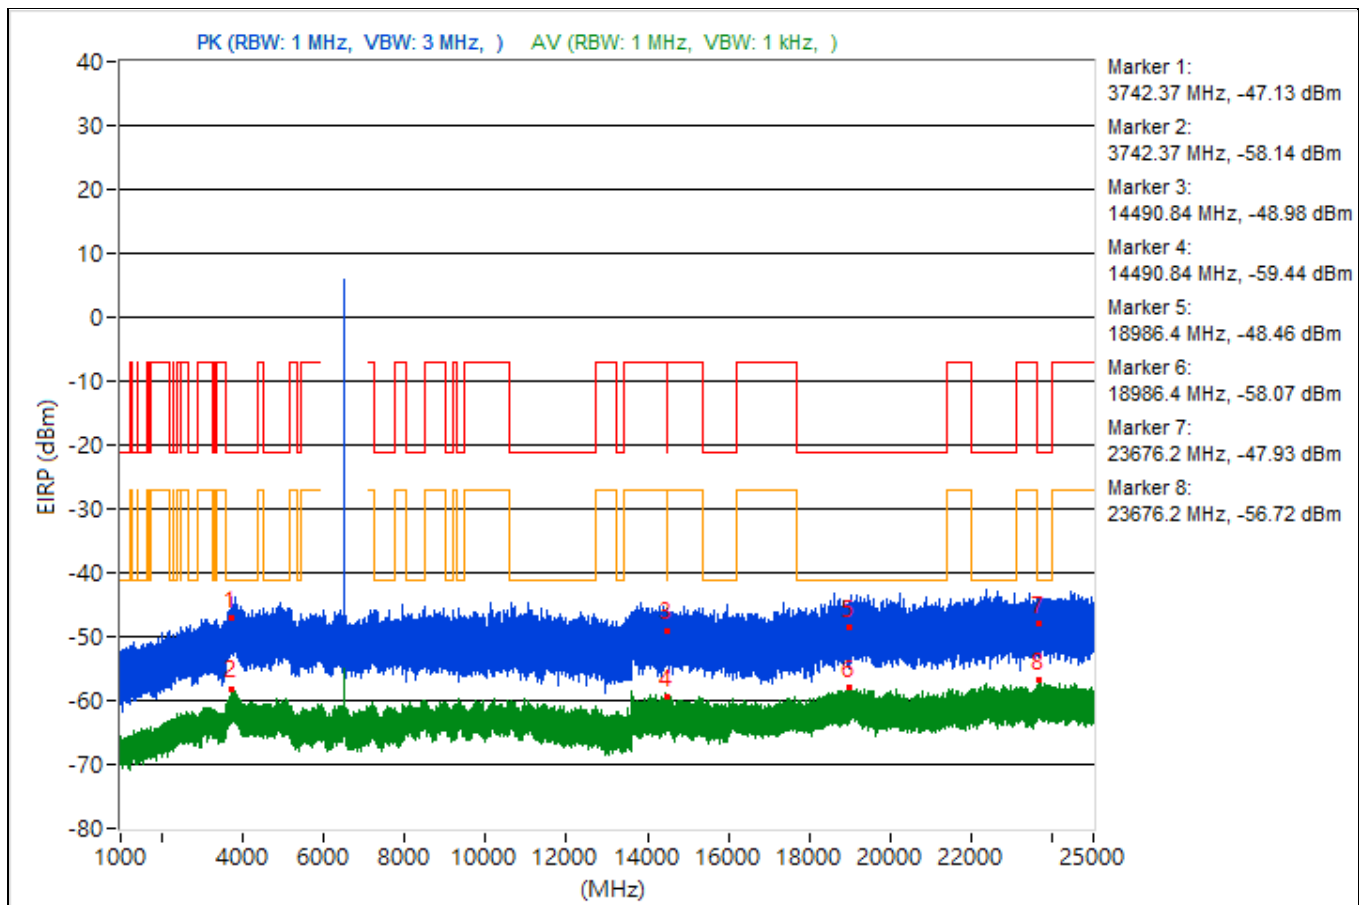


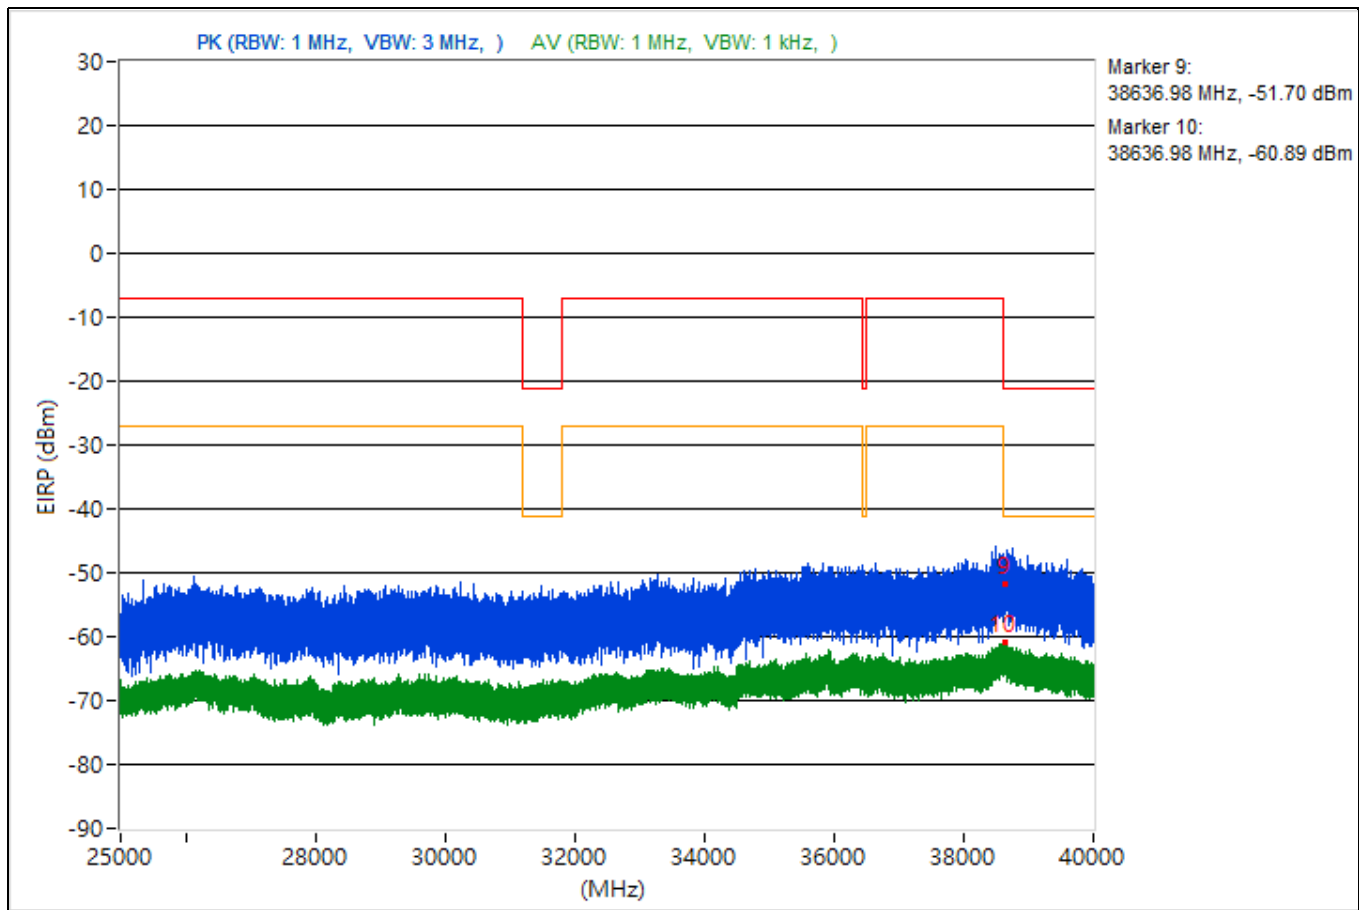


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3788.57	45.87 PK	74	-28.13	-54.31	4.92	-49.39
2	3788.57	36.79 AV	54	-17.21	-63.39	4.92	-58.47
3	14491.64	45.29 PK	74	-28.71	-54.89	4.92	-49.97
4	14491.64	35.61 AV	54	-18.39	-64.57	4.92	-59.65
5	19579.4	53.6 PK	74	-20.4	-46.58	4.92	-41.66
6	19579.4	44.92 AV	54	-9.08	-55.26	4.92	-50.34
7	22420.1	46.32 PK	74	-27.68	-53.86	4.92	-48.94
8	22420.1	38.2 AV	54	-15.8	-61.98	4.92	-57.06
9	38736.71	39.44 PK	74	-34.56	-60.74	4.92	-55.82
10	38736.71	34.48 AV	54	-19.52	-65.7	4.92	-60.78

Note: Margin value = Emission Level - Limit value

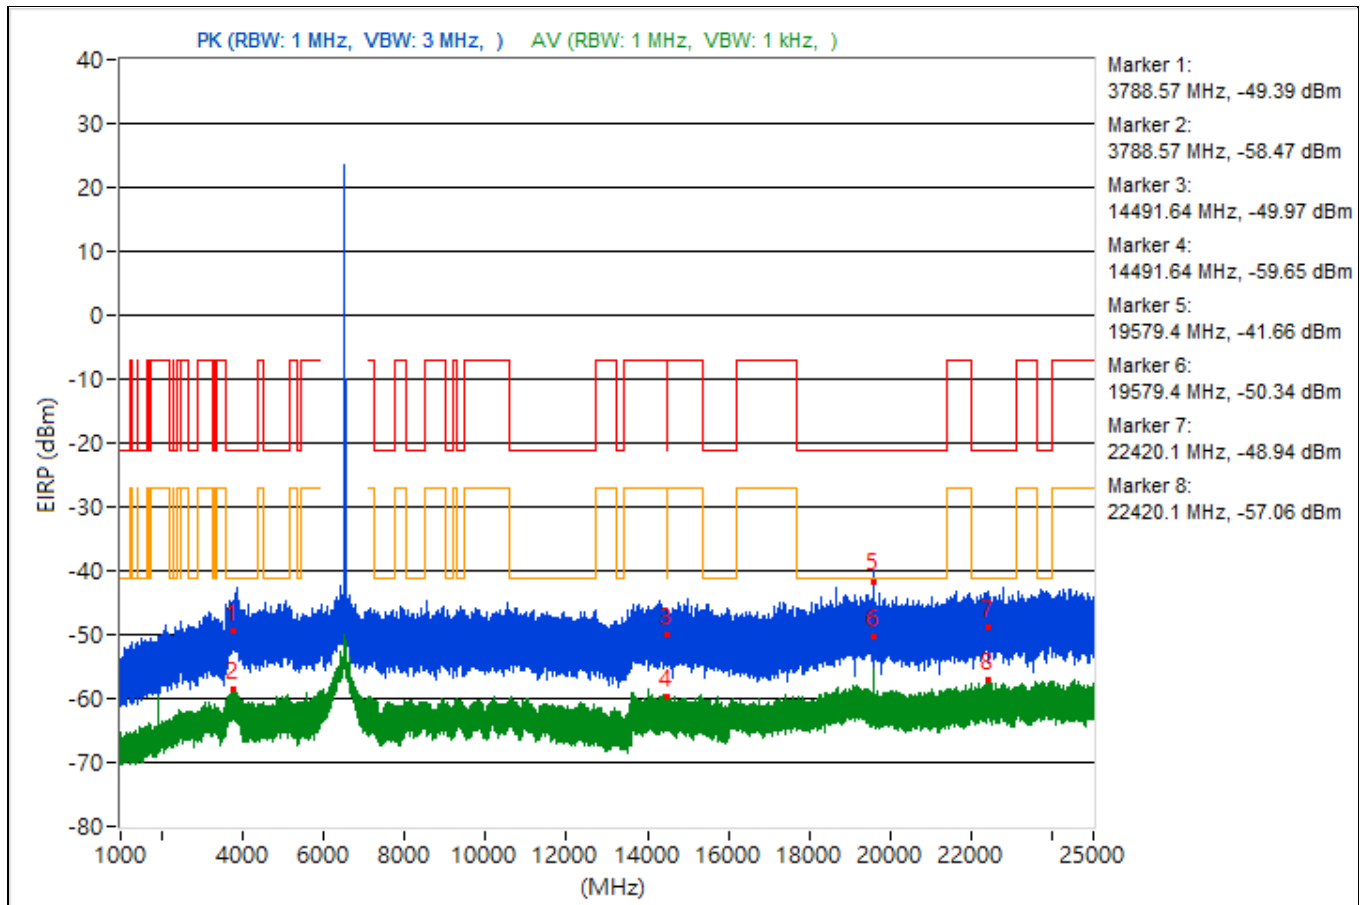


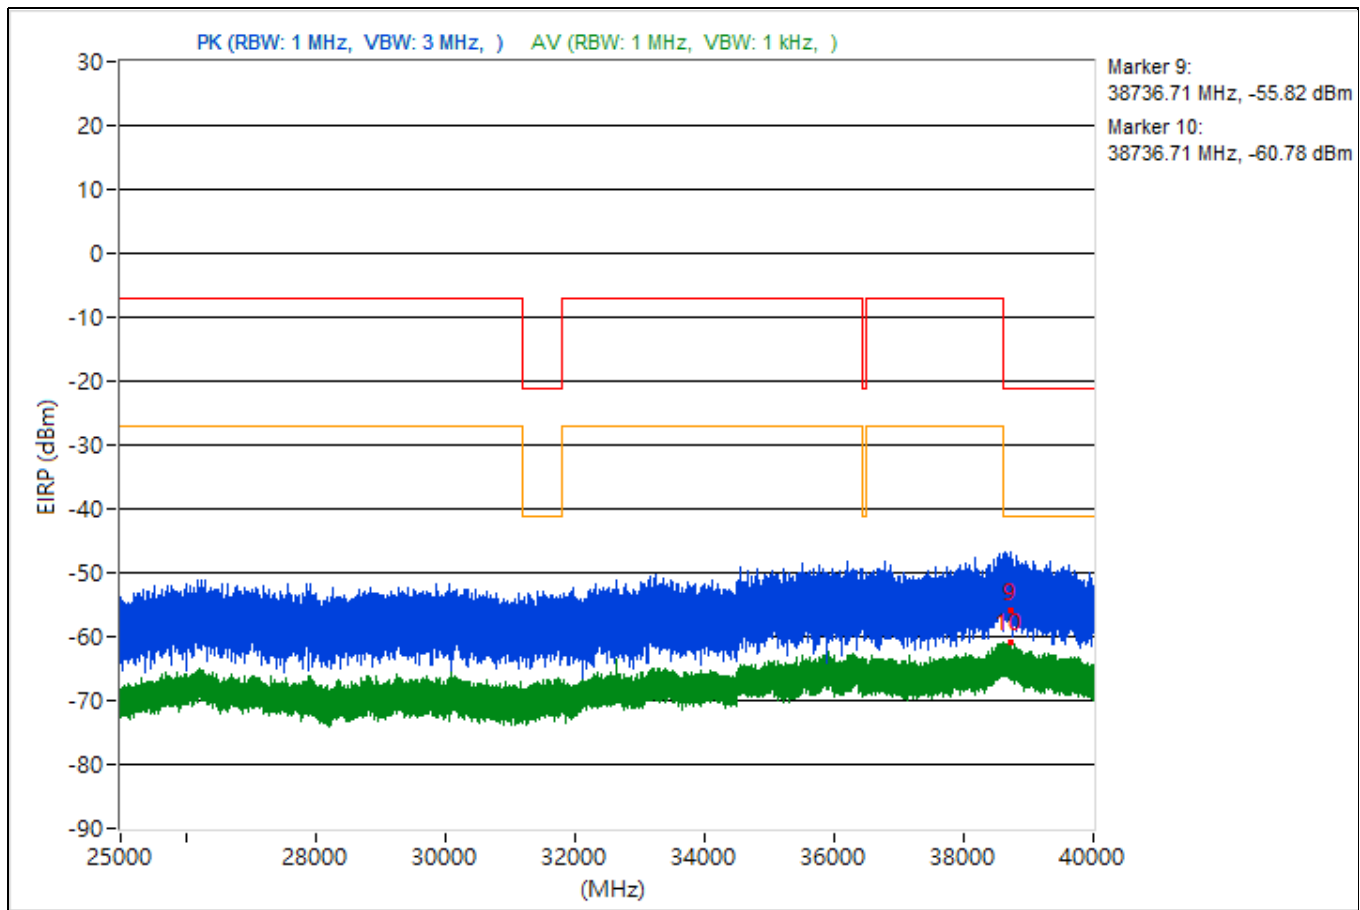


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3760.72	47.93 PK	74	-26.07	-52.25	4.92	-47.33
2	3760.72	37.36 AV	54	-16.64	-62.82	4.92	-57.9
3	14485.87	45.91 PK	74	-28.09	-54.27	4.92	-49.35
4	14485.87	35.86 AV	54	-18.14	-64.32	4.92	-59.4
5	19109.7	49.15 PK	74	-24.85	-51.03	4.92	-46.11
6	19109.7	37.62 AV	54	-16.38	-62.56	4.92	-57.64
7	22409.6	48.1 PK	74	-25.9	-52.08	4.92	-47.16
8	22409.6	38.08 AV	54	-15.92	-62.1	4.92	-57.18
9	38781.78	41.57 PK	74	-32.43	-58.61	4.92	-53.69
10	38781.78	34.54 AV	54	-19.46	-65.64	4.92	-60.72

Note: Margin value = Emission Level - Limit value

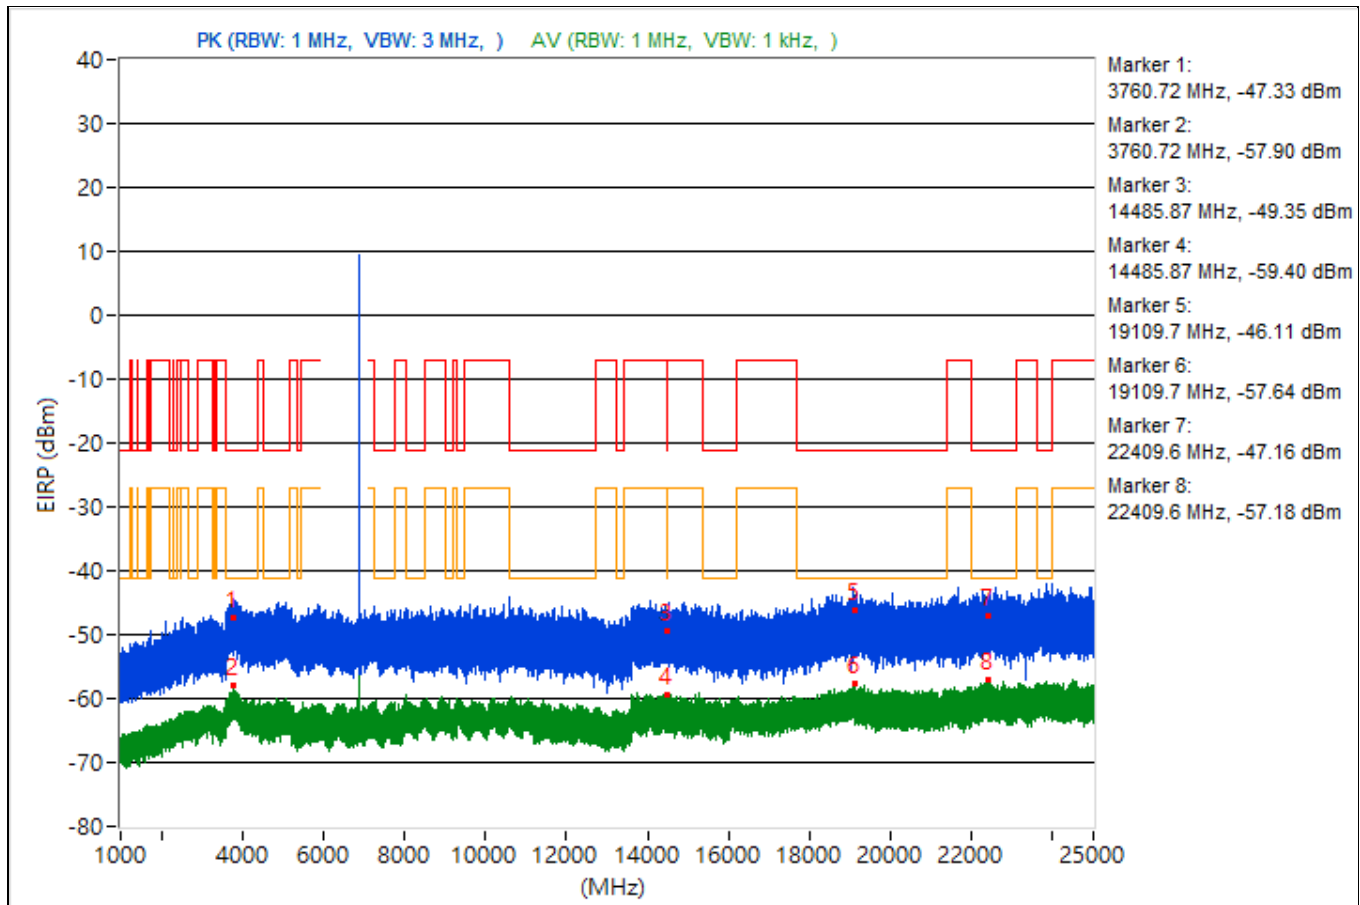


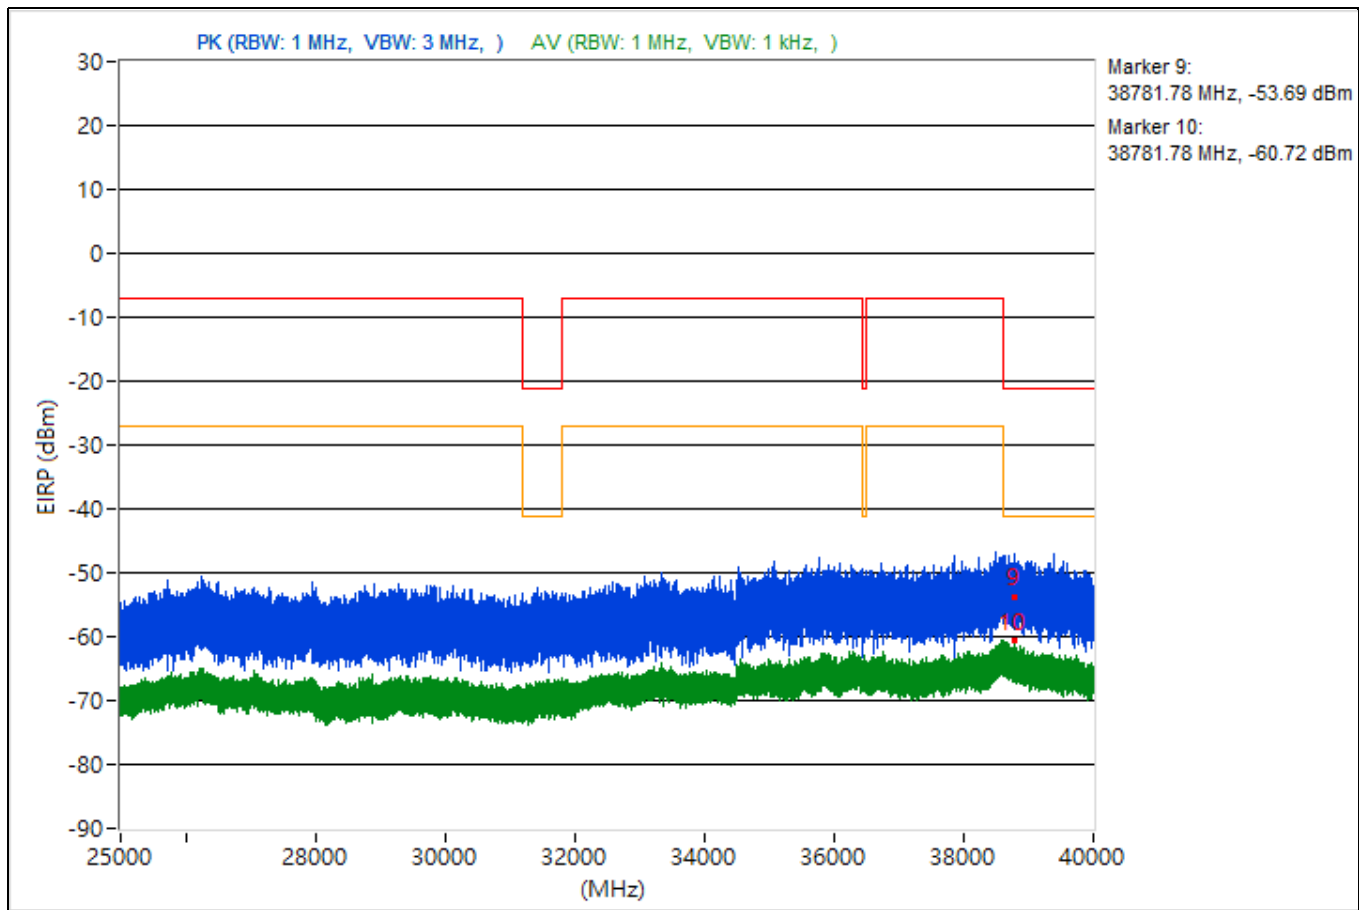


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3783.51	46.85 PK	74	-27.15	-53.33	4.92	-48.41
2	3783.51	37.37 AV	54	-16.63	-62.81	4.92	-57.89
3	7261.81	42.14 PK	74	-31.86	-58.04	4.92	-53.12
4	7261.81	36.18 AV	54	-17.82	-64	4.92	-59.08
5	20959.4	47.54 PK	74	-26.46	-52.64	4.92	-47.72
6	20959.4	39.84 AV	54	-14.16	-60.34	4.92	-55.42
7	23663.4	45.42 PK	74	-28.58	-54.76	4.92	-49.84
8	23663.4	38.09 AV	54	-15.91	-62.09	4.92	-57.17
9	38656.71	42.08 PK	74	-31.92	-58.1	4.92	-53.18
10	38656.71	34.49 AV	54	-19.51	-65.69	4.92	-60.77

Note: Margin value = Emission Level - Limit value

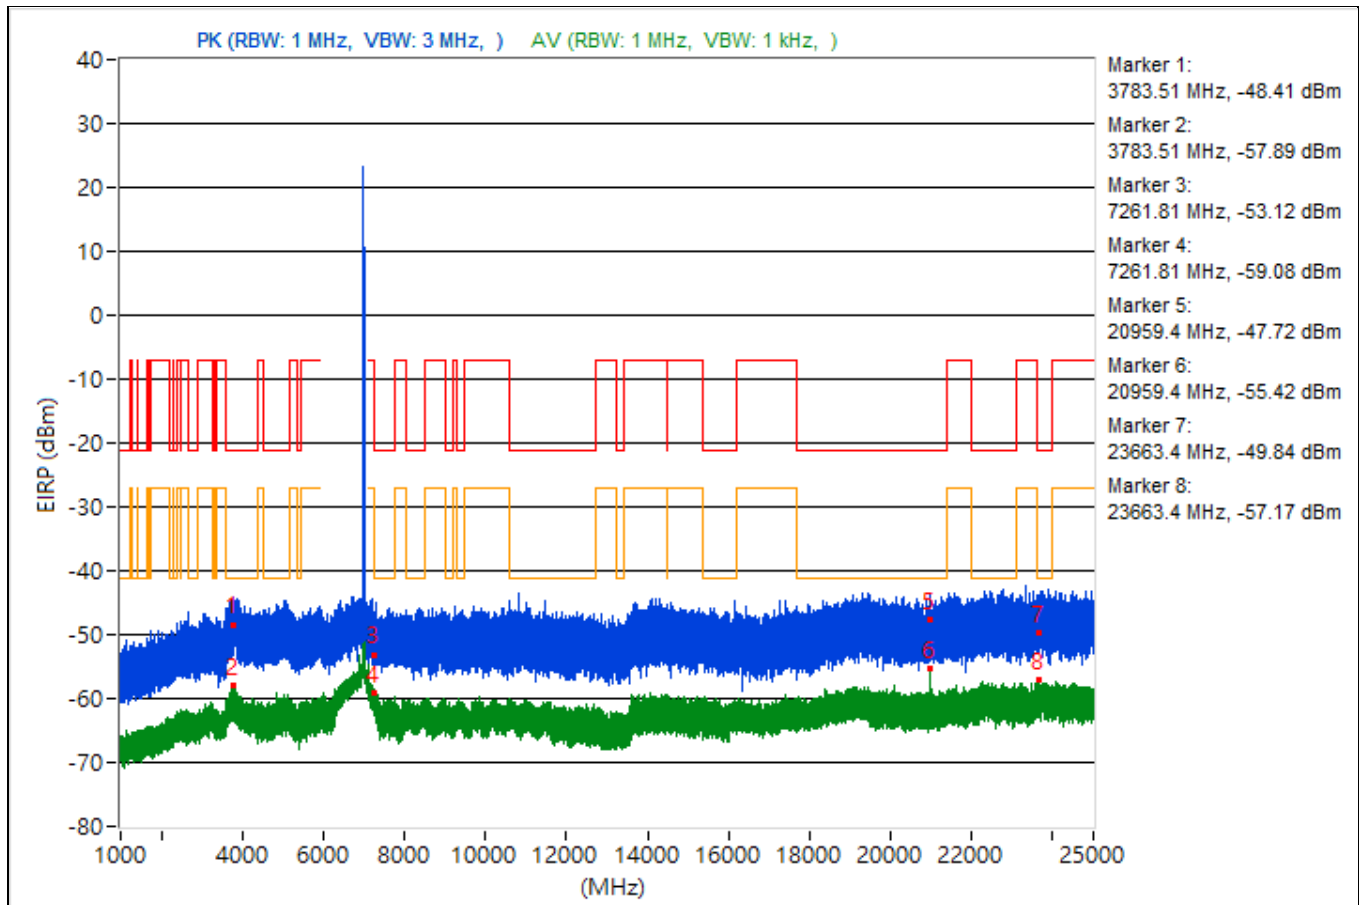


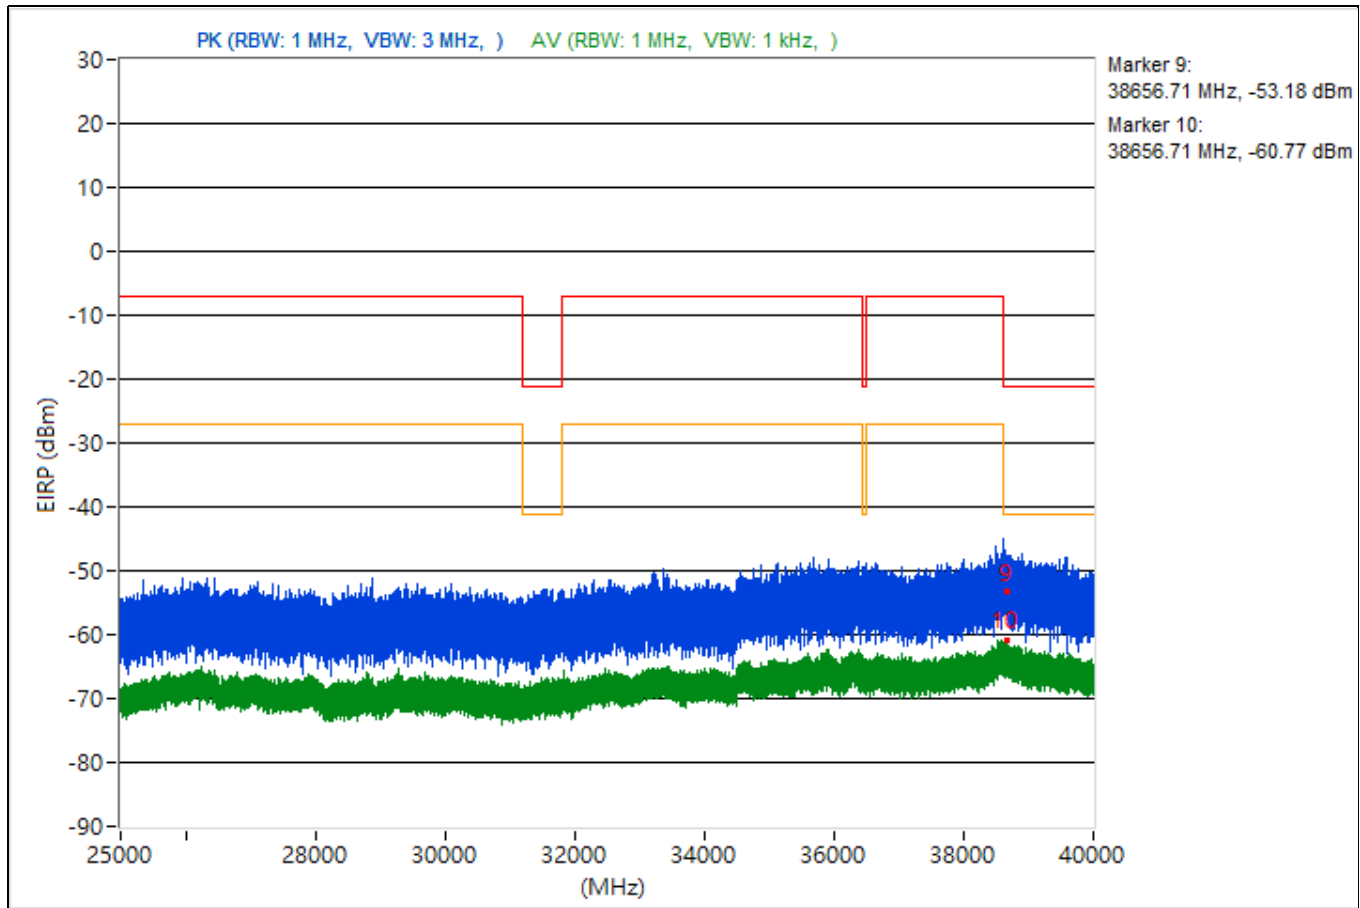


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.58	46.62 PK	74	-27.38	-53.56	4.92	-48.64
2	3810.58	36.77 AV	54	-17.23	-63.41	4.92	-58.49
3	14479.82	46.44 PK	74	-27.56	-53.74	4.92	-48.82
4	14479.82	36.18 AV	54	-17.82	-64	4.92	-59.08
5	19177.7	49.05 PK	74	-24.95	-51.13	4.92	-46.21
6	19177.7	37.52 AV	54	-16.48	-62.66	4.92	-57.74
7	23648.8	44.94 PK	74	-29.06	-55.24	4.92	-50.32
8	23648.8	38.11 AV	54	-15.89	-62.07	4.92	-57.15
9	38650.4	42.57 PK	74	-31.43	-57.61	4.92	-52.69
10	38650.4	34.93 AV	54	-19.07	-65.25	4.92	-60.33

Note: Margin value = Emission Level - Limit value

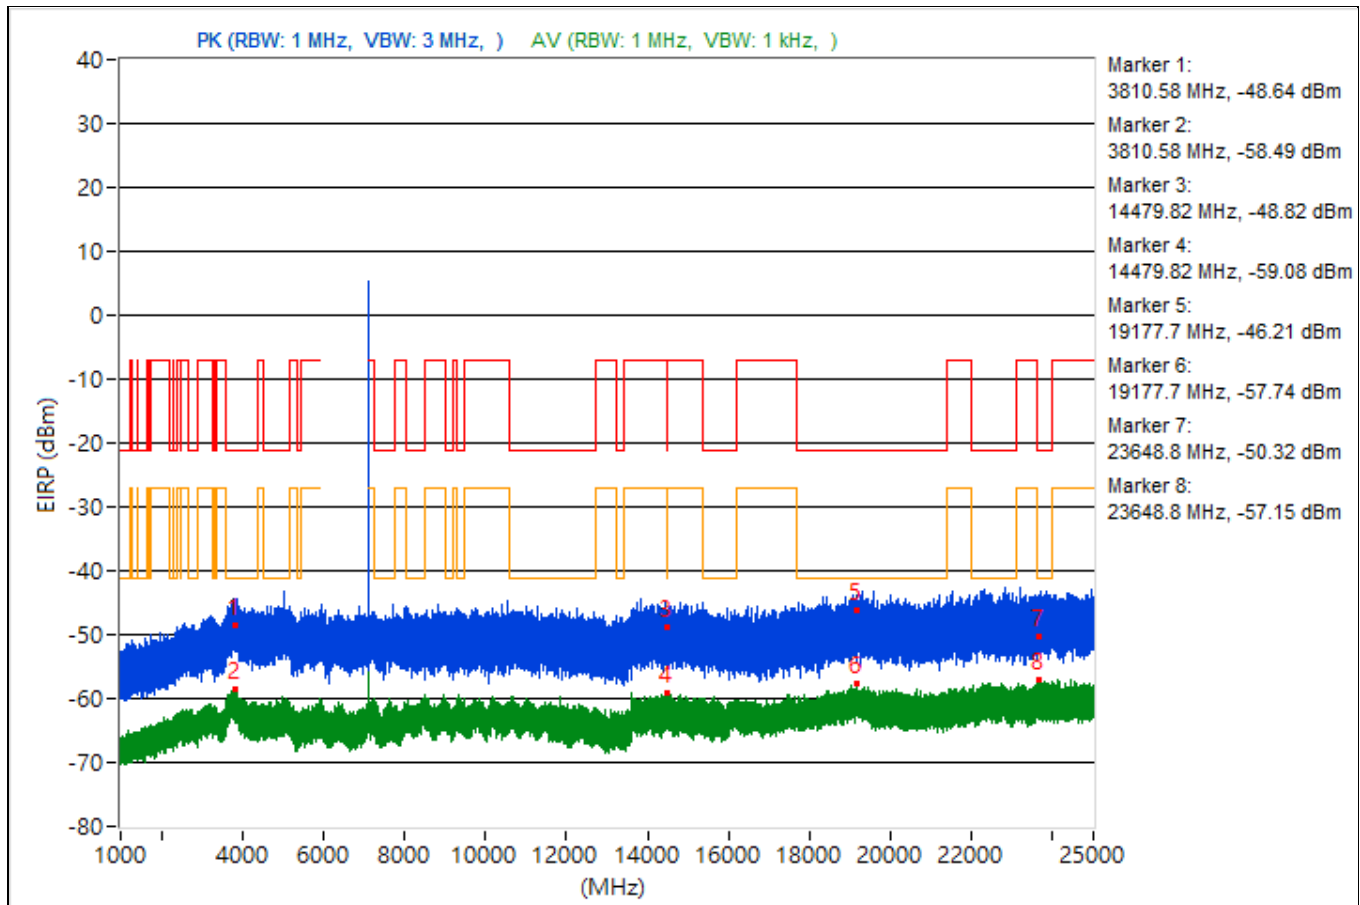


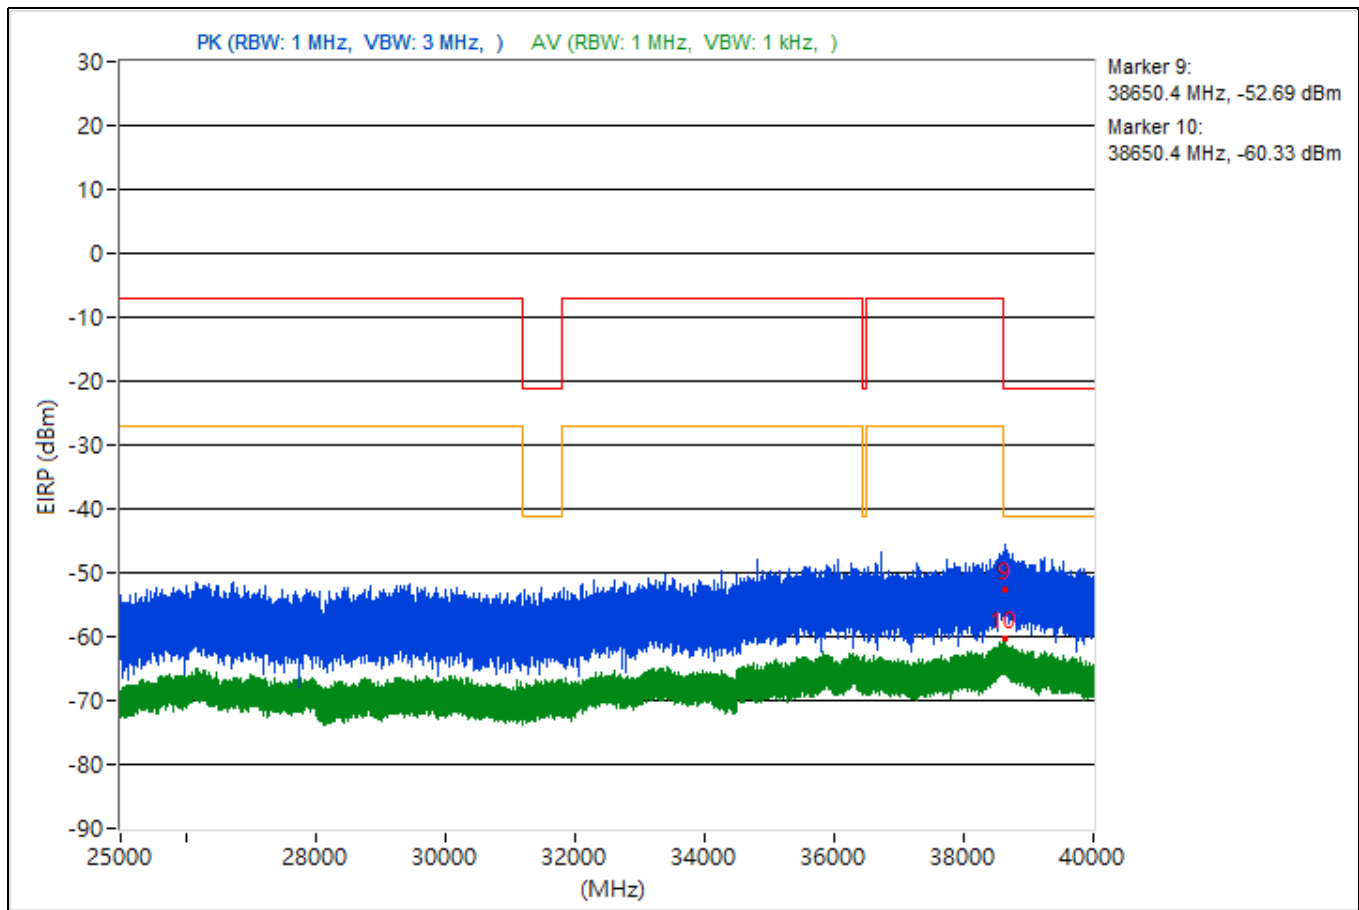


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.91	48.74 PK	74	-25.26	-51.44	4.92	-46.52
2	3777.91	37.07 AV	54	-16.93	-63.11	4.92	-58.19
3	8479.38	44.09 PK	74	-29.91	-56.09	4.92	-51.17
4	8479.38	35.85 AV	54	-18.15	-64.33	4.92	-59.41
5	19131.8	46.48 PK	74	-27.52	-53.7	4.92	-48.78
6	19131.8	37.47 AV	54	-16.53	-62.71	4.92	-57.79
7	23901	45.72 PK	74	-28.28	-54.46	4.92	-49.54
8	23901	38.22 AV	54	-15.78	-61.96	4.92	-57.04
9	38612.98	43.93 PK	74	-30.07	-56.25	4.92	-51.33
10	38612.98	34.25 AV	54	-19.75	-65.93	4.92	-61.01

Note: Margin value = Emission Level - Limit value

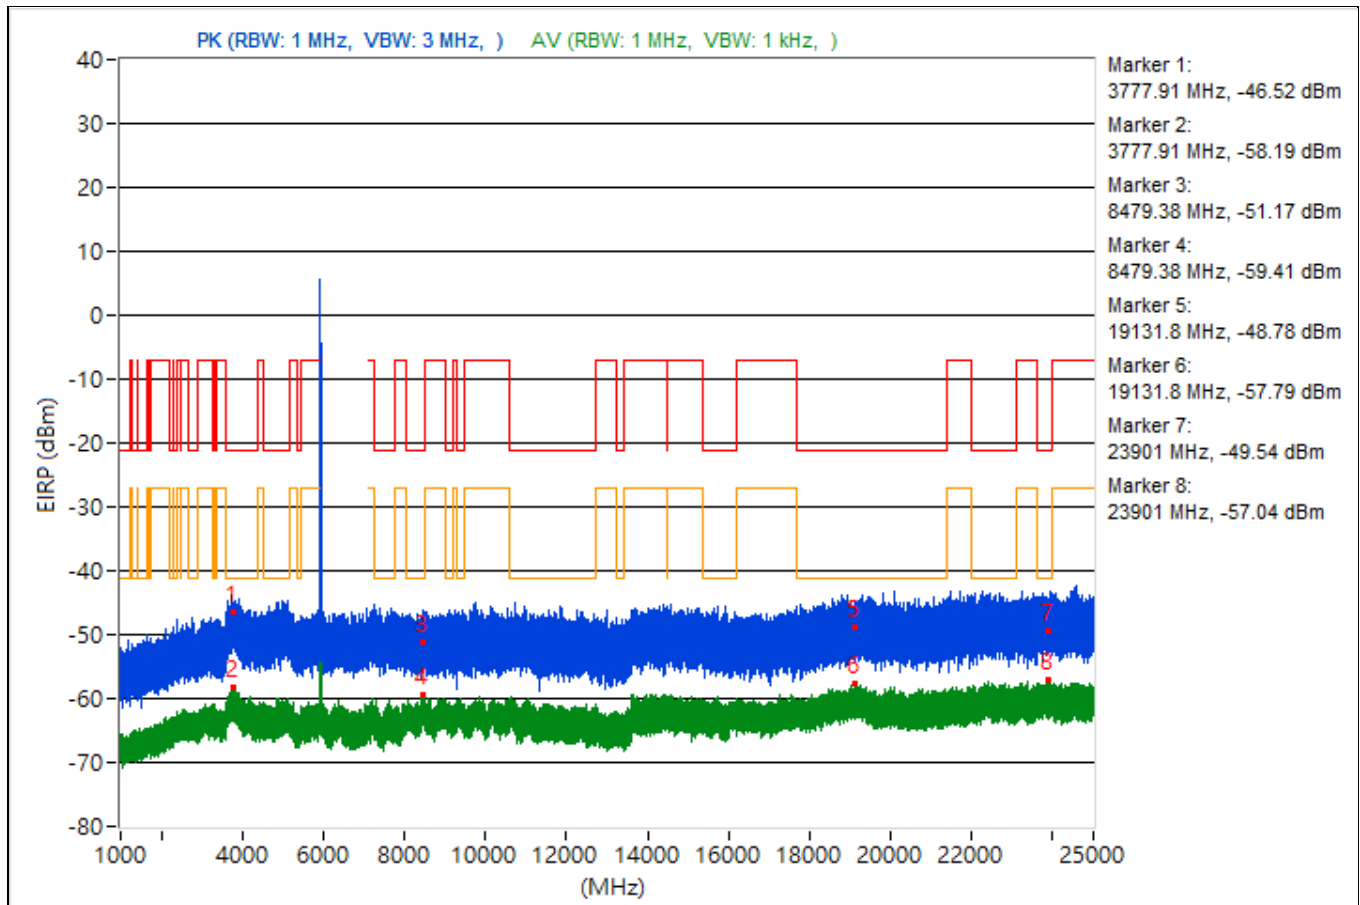


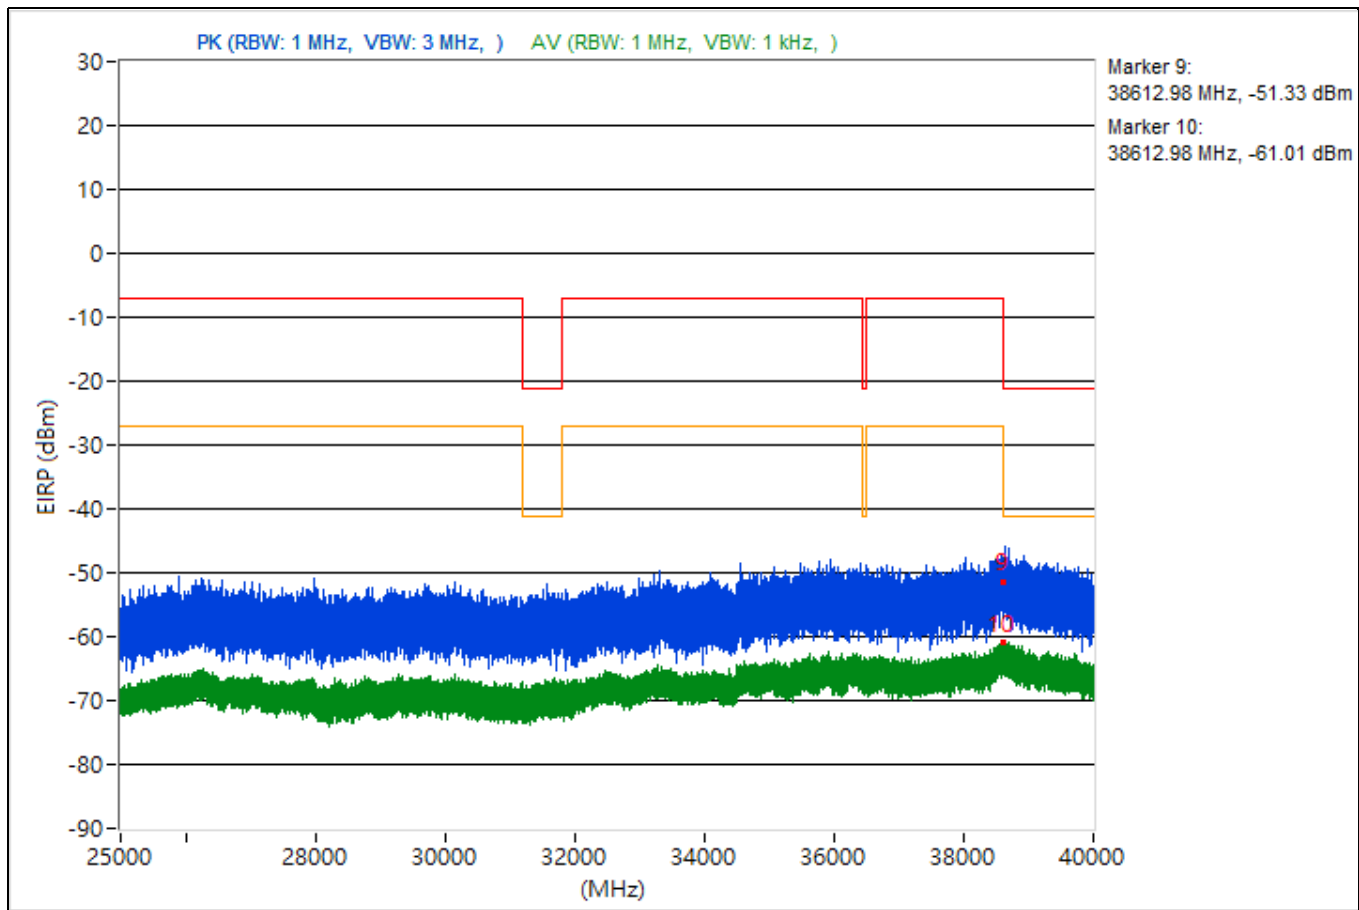


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.26	48.55 PK	74	-25.45	-51.63	4.92	-46.71
2	3830.26	36.87 AV	54	-17.13	-63.31	4.92	-58.39
3	14497.07	44.52 PK	74	-29.48	-55.66	4.92	-50.74
4	14497.07	36.01 AV	54	-17.99	-64.17	4.92	-59.25
5	19177	46.4 PK	74	-27.6	-53.78	4.92	-48.86
6	19177	37.06 AV	54	-16.94	-63.12	4.92	-58.2
7	22436.2	48.22 PK	74	-25.78	-51.96	4.92	-47.04
8	22436.2	37.98 AV	54	-16.02	-62.2	4.92	-57.28
9	38635.91	42.33 PK	74	-31.67	-57.85	4.92	-52.93
10	38635.91	34.13 AV	54	-19.87	-66.05	4.92	-61.13

Note: Margin value = Emission Level - Limit value

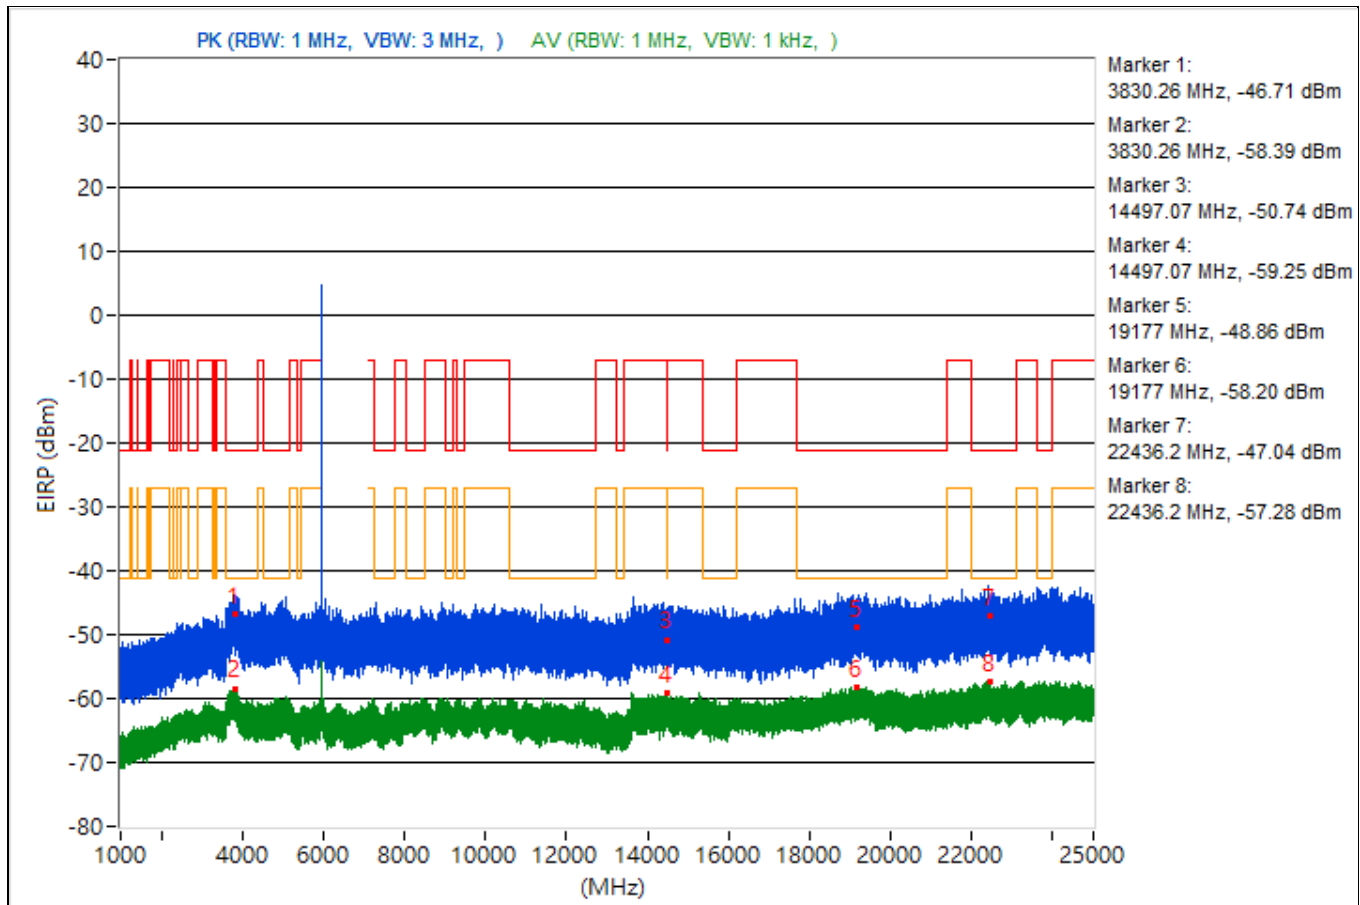


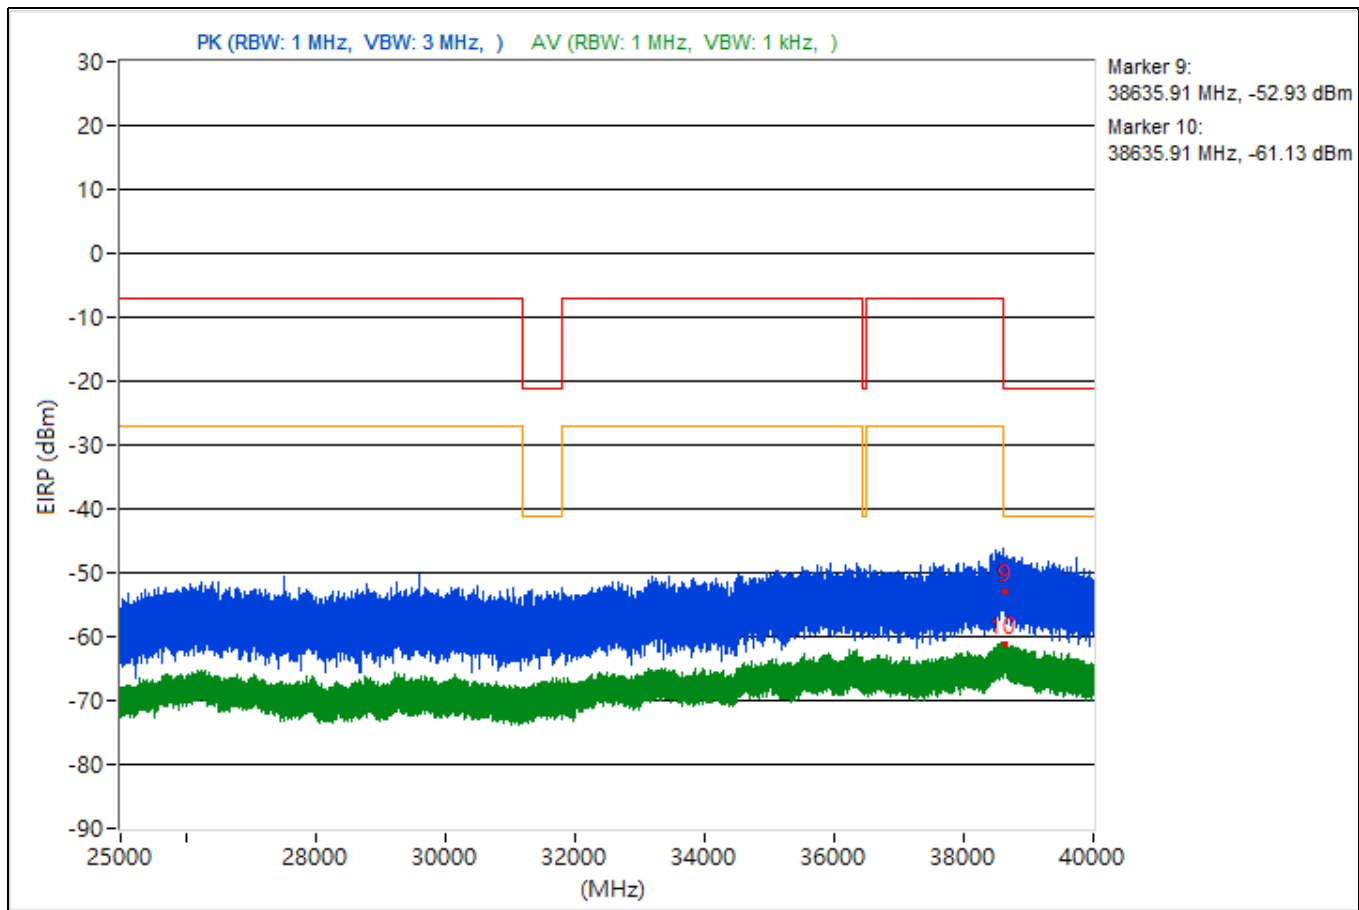


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3745.71	46.98 PK	74	-27.02	-53.2	4.92	-48.28
2	3745.71	37.32 AV	54	-16.68	-62.86	4.92	-57.94
3	14471.2	43.41 PK	74	-30.59	-56.77	4.92	-51.85
4	14471.2	35.54 AV	54	-18.46	-64.64	4.92	-59.72
5	20087.9	43.84 PK	74	-30.16	-56.34	4.92	-51.42
6	20087.9	37.26 AV	54	-16.74	-62.92	4.92	-58.00
7	22358.3	44.69 PK	74	-29.31	-55.49	4.92	-50.57
8	22358.3	38.86 AV	54	-15.14	-61.32	4.92	-56.40
9	38621.16	46.01 PK	74	-27.99	-54.17	4.92	-49.25
10	38621.16	35.12 AV	54	-18.88	-65.06	4.92	-60.14

Note: Margin value = Emission Level - Limit value

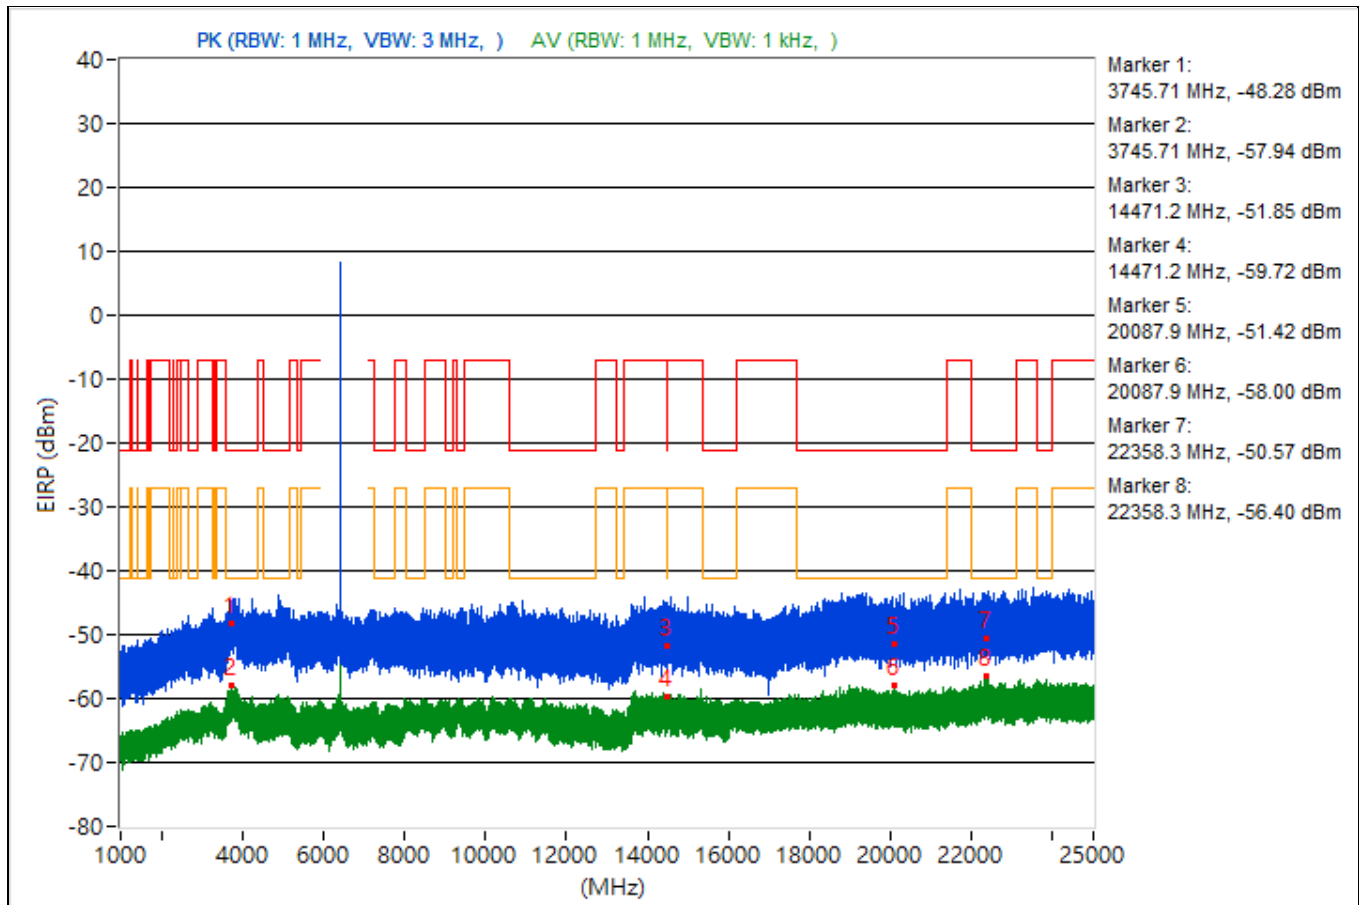


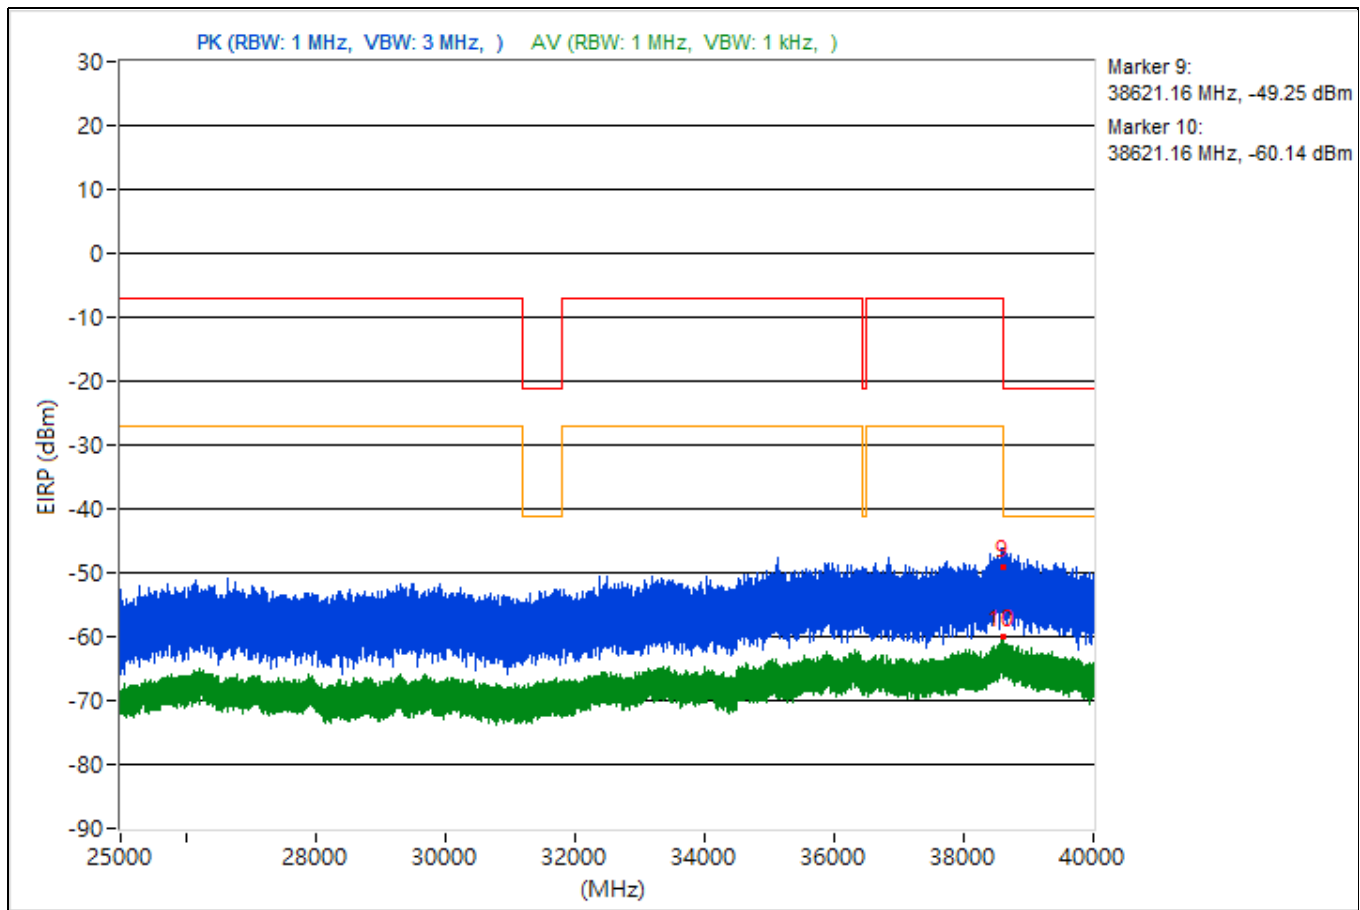


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.59	47.14 PK	74	-26.86	-53.04	4.92	-48.12
2	3804.59	37.02 AV	54	-16.98	-63.16	4.92	-58.24
3	14476.89	45.81 PK	74	-28.19	-54.37	4.92	-49.45
4	14476.89	36.15 AV	54	-17.85	-64.03	4.92	-59.11
5	19213.9	44.77 PK	74	-29.23	-55.41	4.92	-50.49
6	19213.9	37.61 AV	54	-16.39	-62.57	4.92	-57.65
7	22398	49.17 PK	74	-24.83	-51.01	4.92	-46.09
8	22398	38.15 AV	54	-15.85	-62.03	4.92	-57.11
9	38607.38	43.72 PK	74	-30.28	-56.46	4.92	-51.54
10	38607.38	35.25 AV	54	-18.75	-64.93	4.92	-60.01

Note: Margin value = Emission Level - Limit value

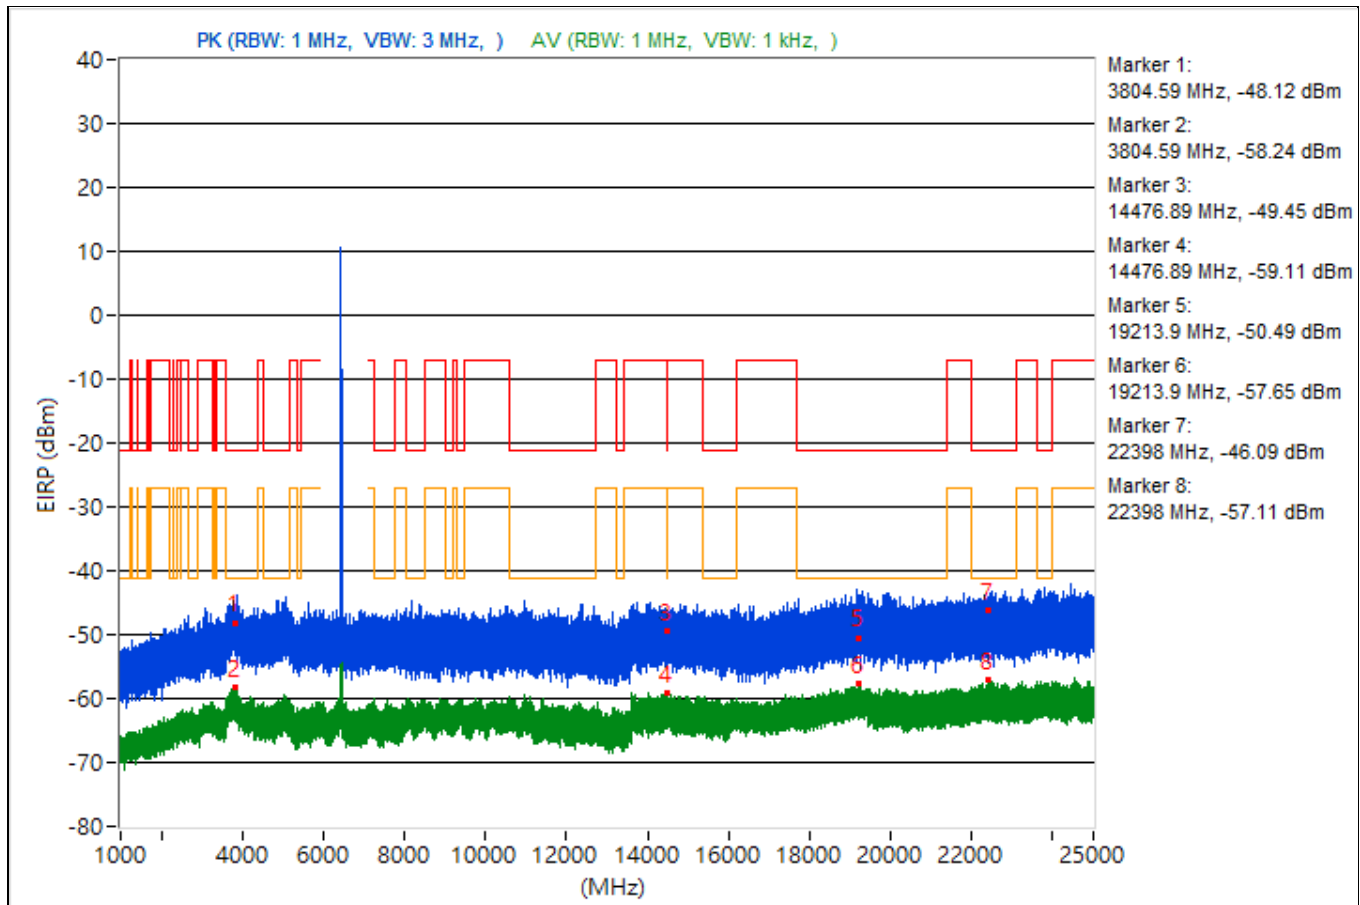


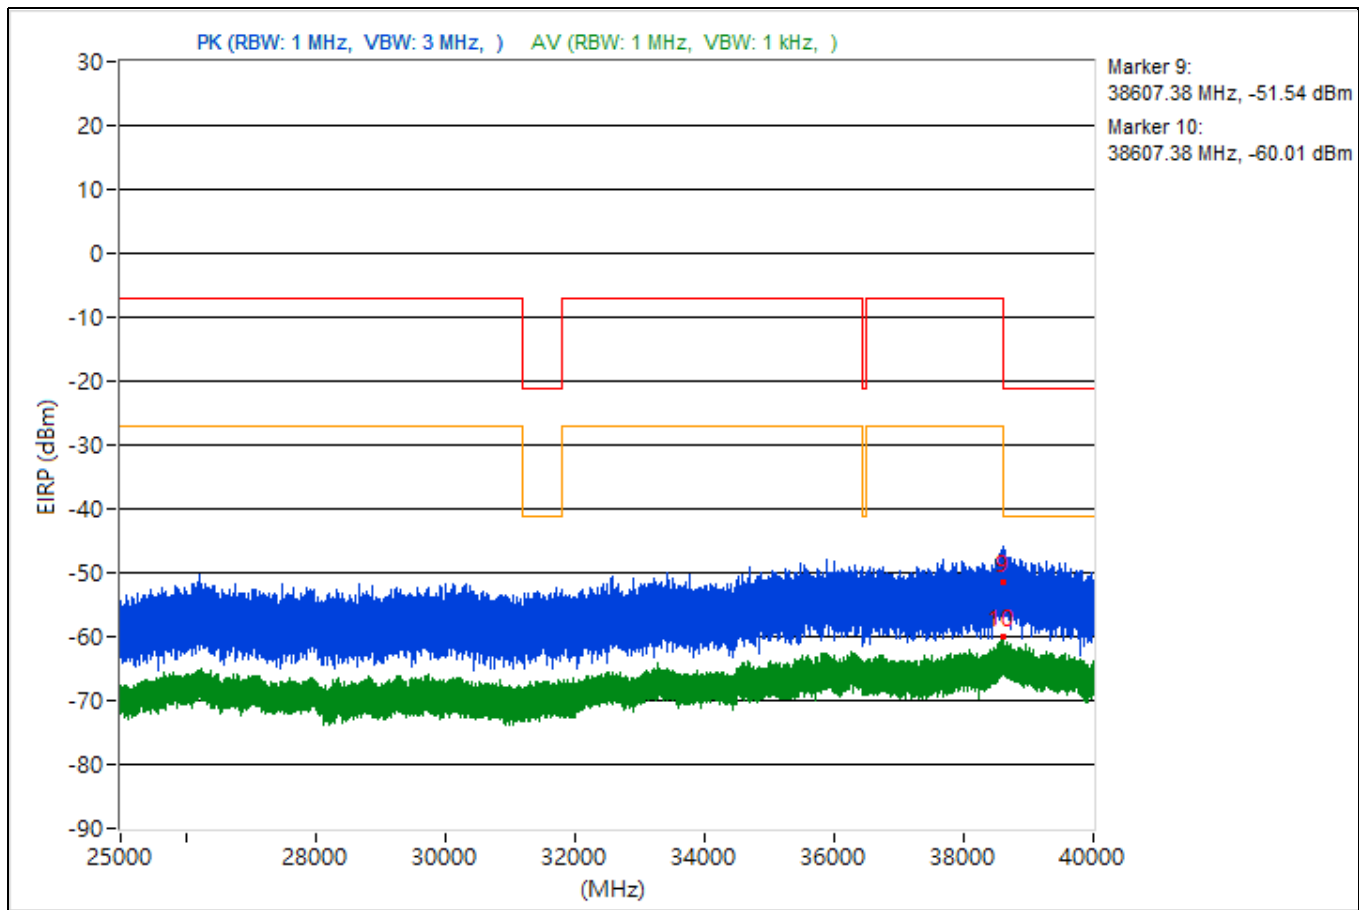


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.69	47.77 PK	74	-26.23	-52.41	4.92	-47.49
2	3771.69	36.88 AV	54	-17.12	-63.3	4.92	-58.38
3	14490.76	45.18 PK	74	-28.82	-55	4.92	-50.08
4	14490.76	36.1 AV	54	-17.9	-64.08	4.92	-59.16
5	18730.3	42.11 PK	74	-31.89	-58.07	4.92	-53.15
6	18730.3	36.96 AV	54	-17.04	-63.22	4.92	-58.3
7	23677.6	46.51 PK	74	-27.49	-53.67	4.92	-48.75
8	23677.6	38.75 AV	54	-15.25	-61.43	4.92	-56.51
9	38609.33	44.3 PK	74	-29.7	-55.88	4.92	-50.96
10	38609.33	34.7 AV	54	-19.3	-65.48	4.92	-60.56

Note: Margin value = Emission Level - Limit value

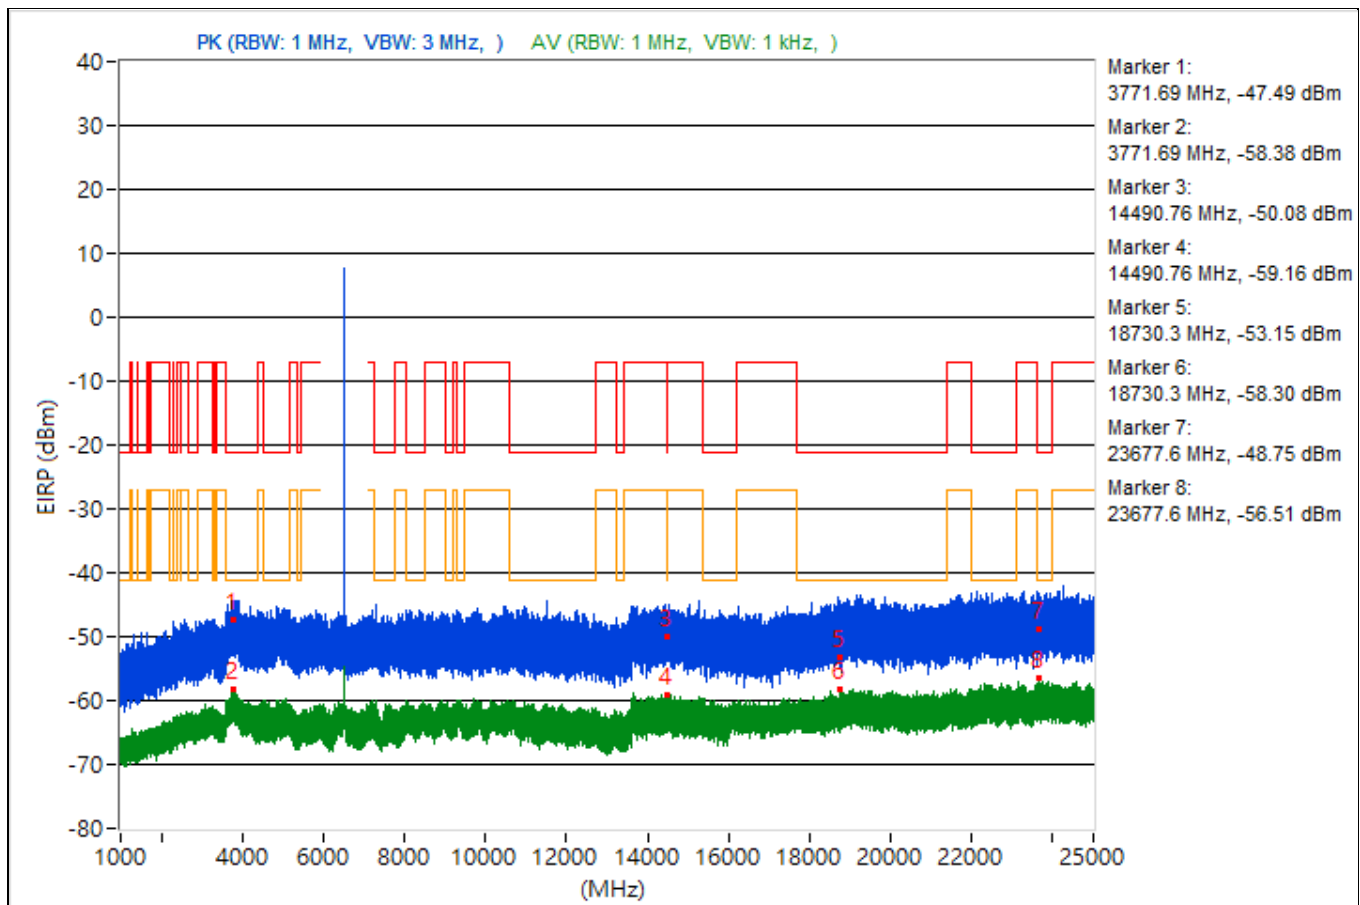


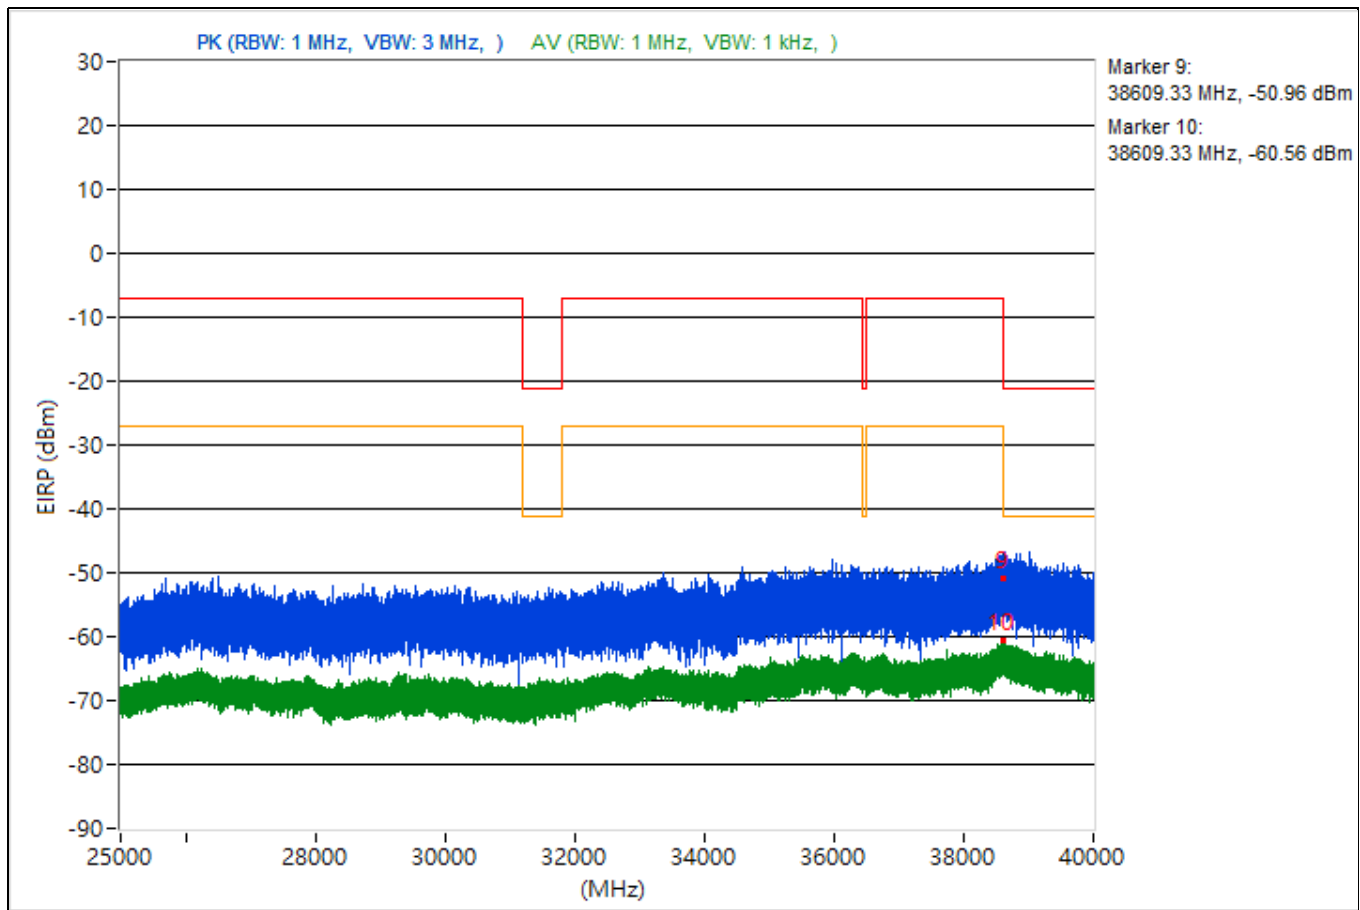


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.81	46.99 PK	74	-27.01	-53.19	4.92	-48.27
2	3768.81	37.08 AV	54	-16.92	-63.1	4.92	-58.18
3	14492.09	44.86 PK	74	-29.14	-55.32	4.92	-50.4
4	14492.09	35.59 AV	54	-18.41	-64.59	4.92	-59.67
5	19257.2	44.37 PK	74	-29.63	-55.81	4.92	-50.89
6	19257.2	38.14 AV	54	-15.86	-62.04	4.92	-57.12
7	23776.8	45.77 PK	74	-28.23	-54.41	4.92	-49.49
8	23776.8	38.21 AV	54	-15.79	-61.97	4.92	-57.05
9	38658.31	42.78 PK	74	-31.22	-57.4	4.92	-52.48
10	38658.31	34.72 AV	54	-19.28	-65.46	4.92	-60.54

Note: Margin value = Emission Level - Limit value

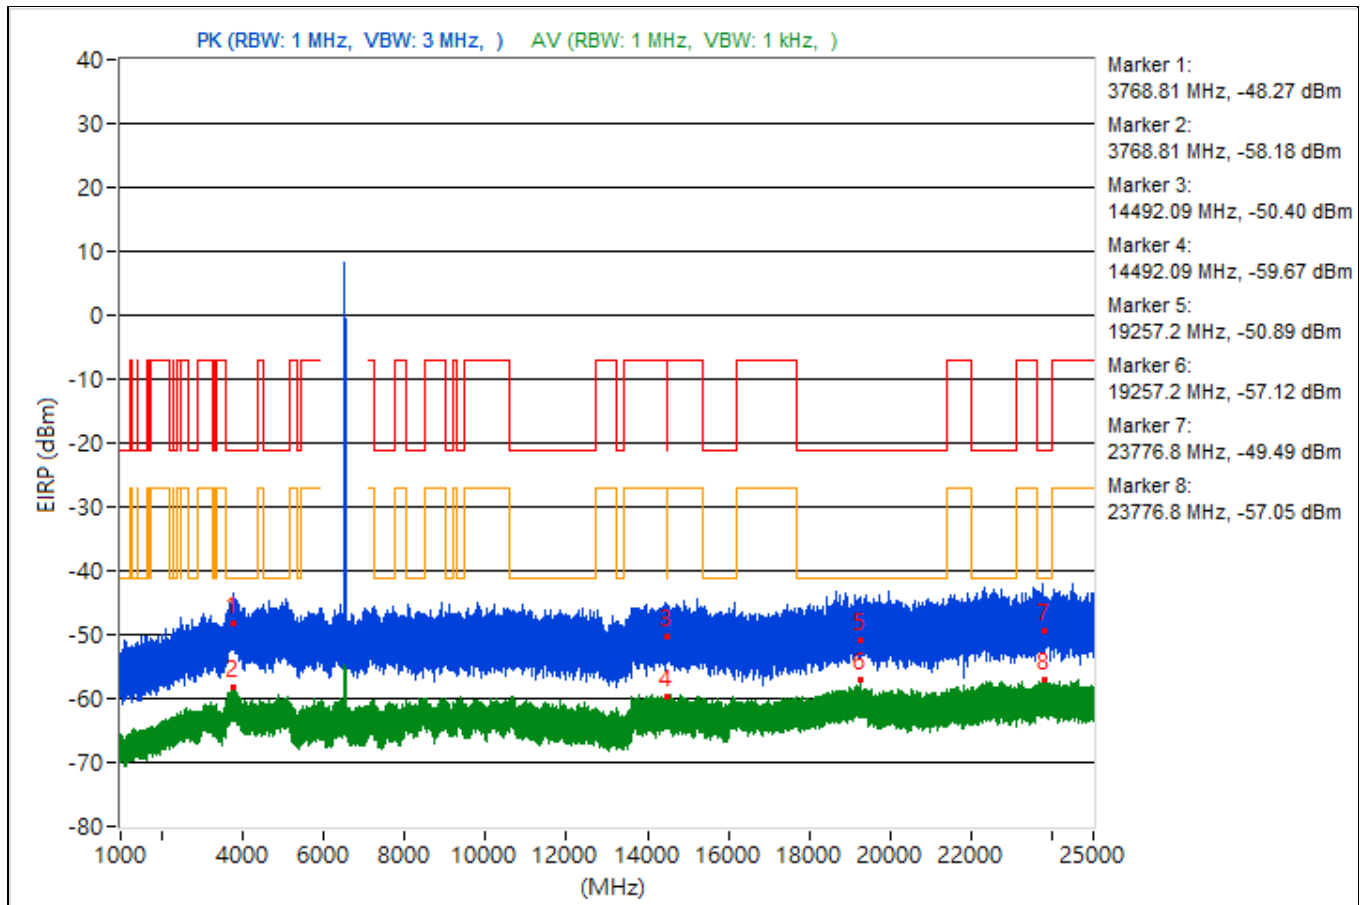


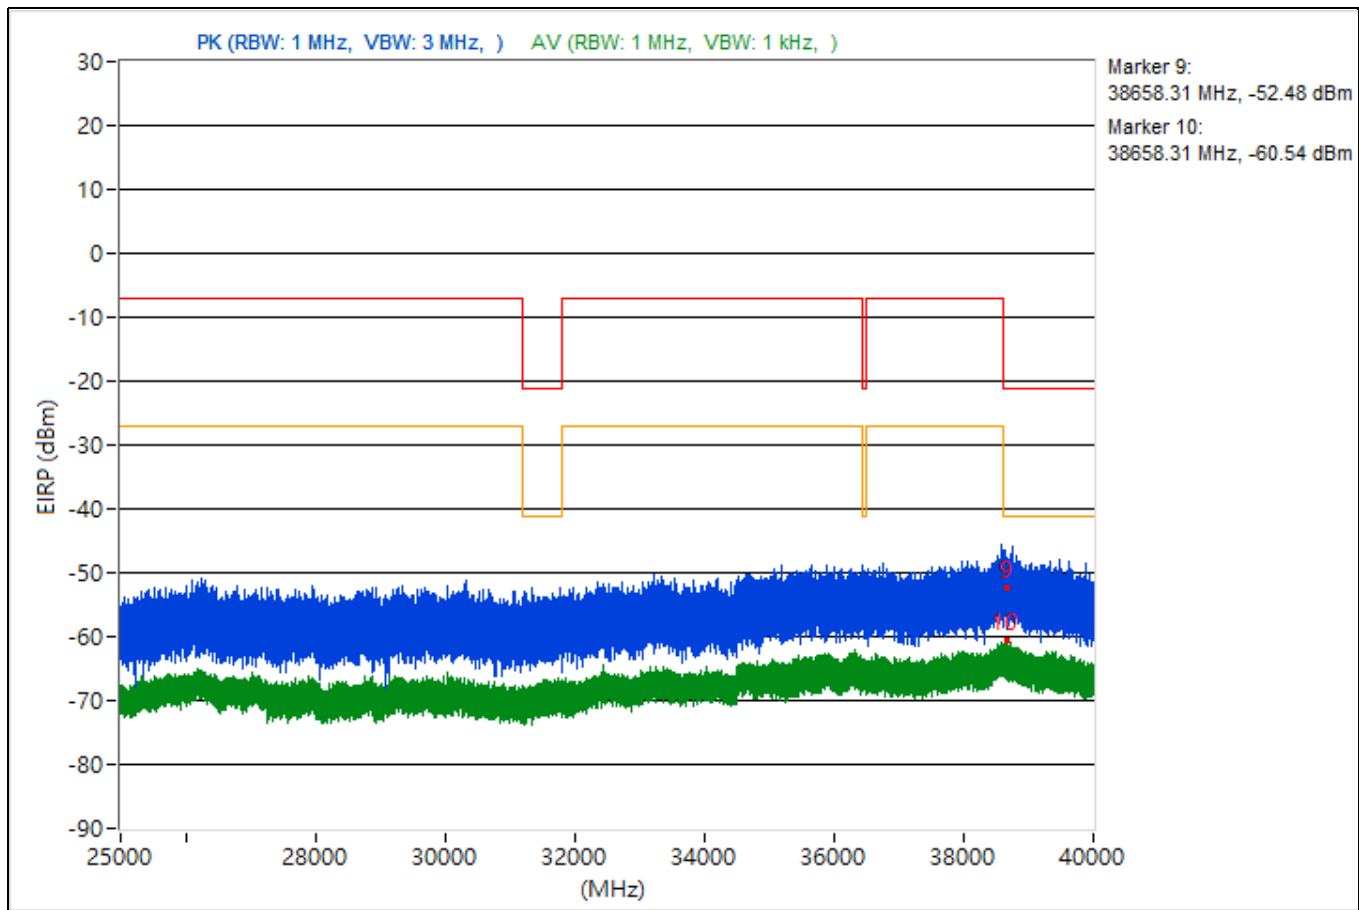


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3761.27	47.89 PK	74	-26.11	-52.29	4.92	-47.37
2	3761.27	36.74 AV	54	-17.26	-63.44	4.92	-58.52
3	14493.96	46.5 PK	74	-27.5	-53.68	4.92	-48.76
4	14493.96	36.19 AV	54	-17.81	-63.99	4.92	-59.07
5	19196.8	45.12 PK	74	-28.88	-55.06	4.92	-50.14
6	19196.8	37.73 AV	54	-16.27	-62.45	4.92	-57.53
7	23645.1	46.77 PK	74	-27.23	-53.41	4.92	-48.49
8	23645.1	38.68 AV	54	-15.32	-61.5	4.92	-56.58
9	38634.22	42.16 PK	74	-31.84	-58.02	4.92	-53.1
10	38634.22	34.28 AV	54	-19.72	-65.9	4.92	-60.98

Note: Margin value = Emission Level - Limit value

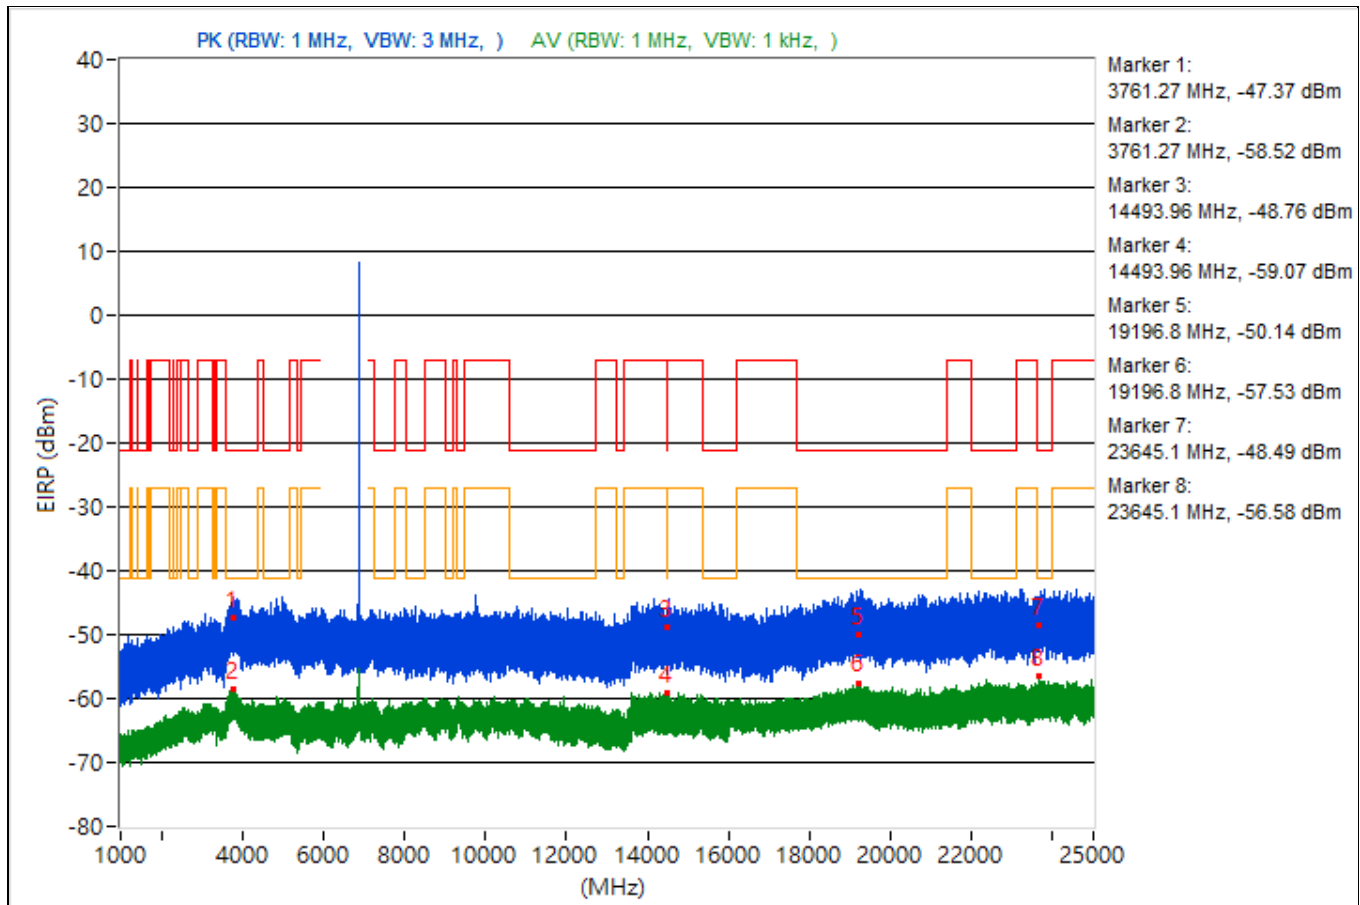


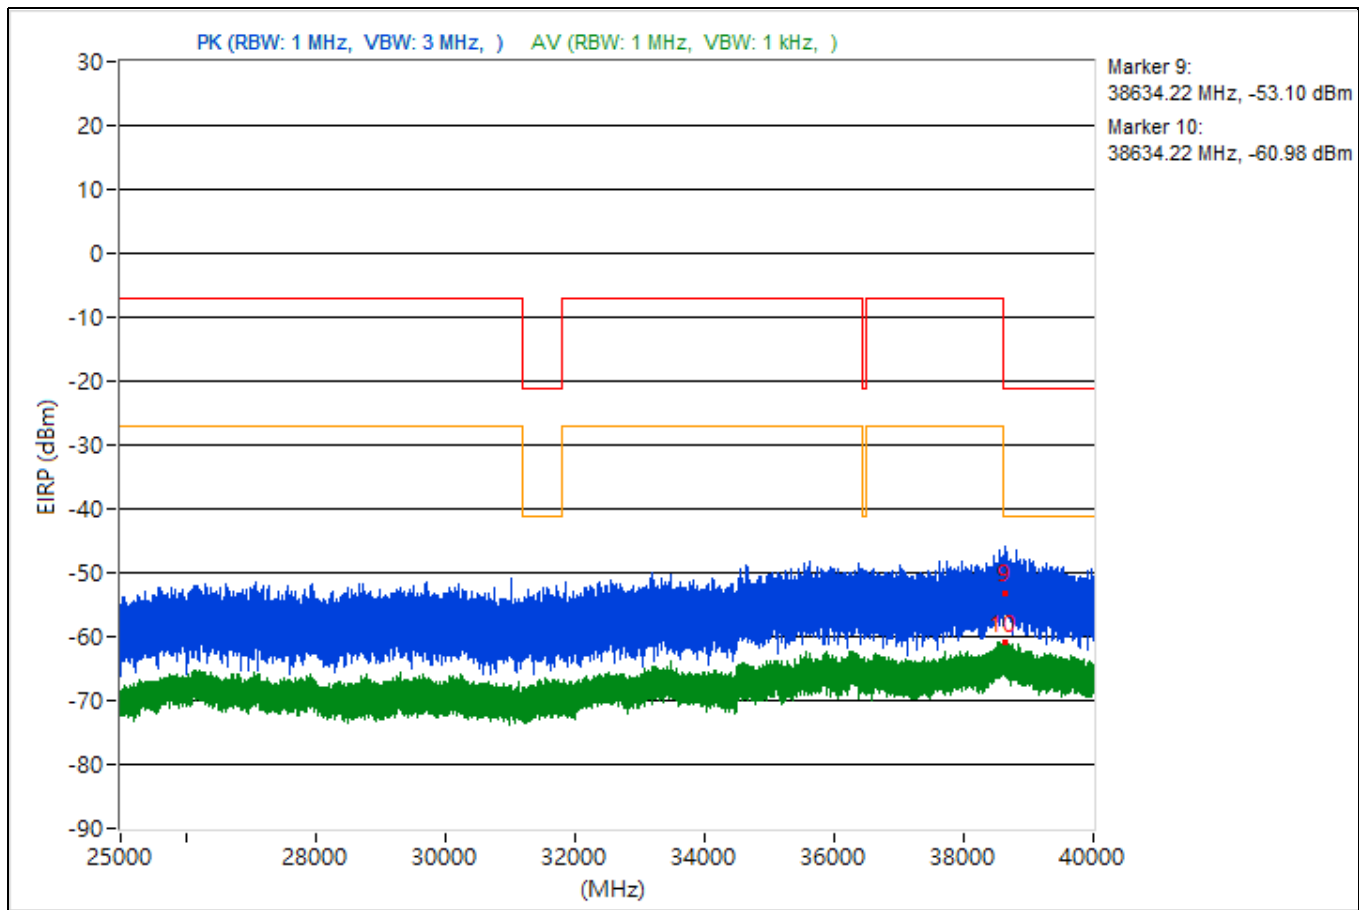


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3839.36	46.25 PK	74	-27.75	-53.93	4.92	-49.01
2	3839.36	37.41 AV	54	-16.59	-62.77	4.92	-57.85
3	8497.51	45.58 PK	74	-28.42	-54.6	4.92	-49.68
4	8497.51	35.93 AV	54	-18.07	-64.25	4.92	-59.33
5	19140.5	44.58 PK	74	-29.42	-55.6	4.92	-50.68
6	19140.5	37.51 AV	54	-16.49	-62.67	4.92	-57.75
7	23820.4	48.28 PK	74	-25.72	-51.9	4.92	-46.98
8	23820.4	38.53 AV	54	-15.47	-61.65	4.92	-56.73
9	38620	43.69 PK	74	-30.31	-56.49	4.92	-51.57
10	38620	34.87 AV	54	-19.13	-65.31	4.92	-60.39

Note: Margin value = Emission Level - Limit value

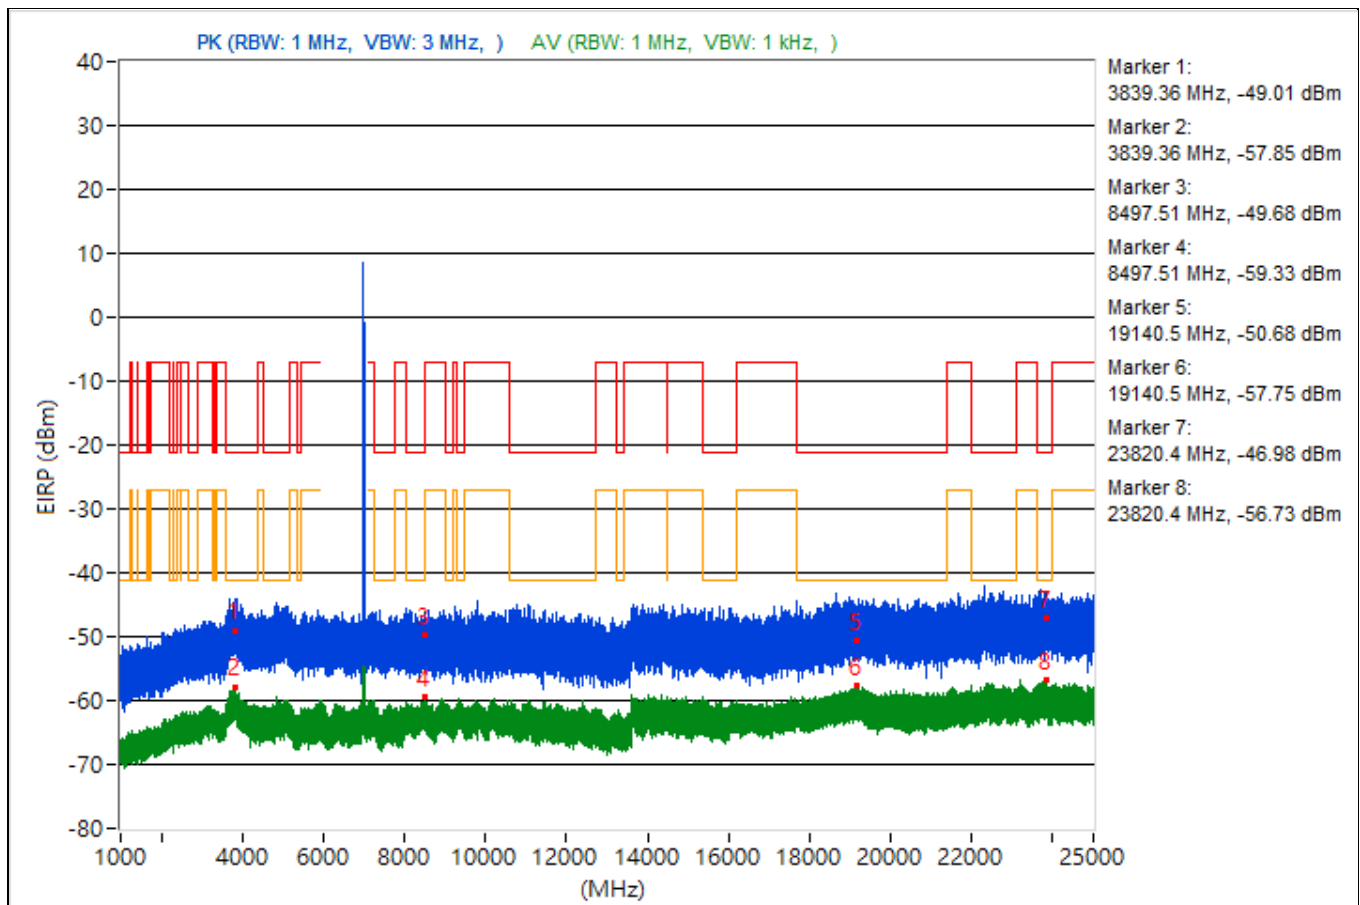


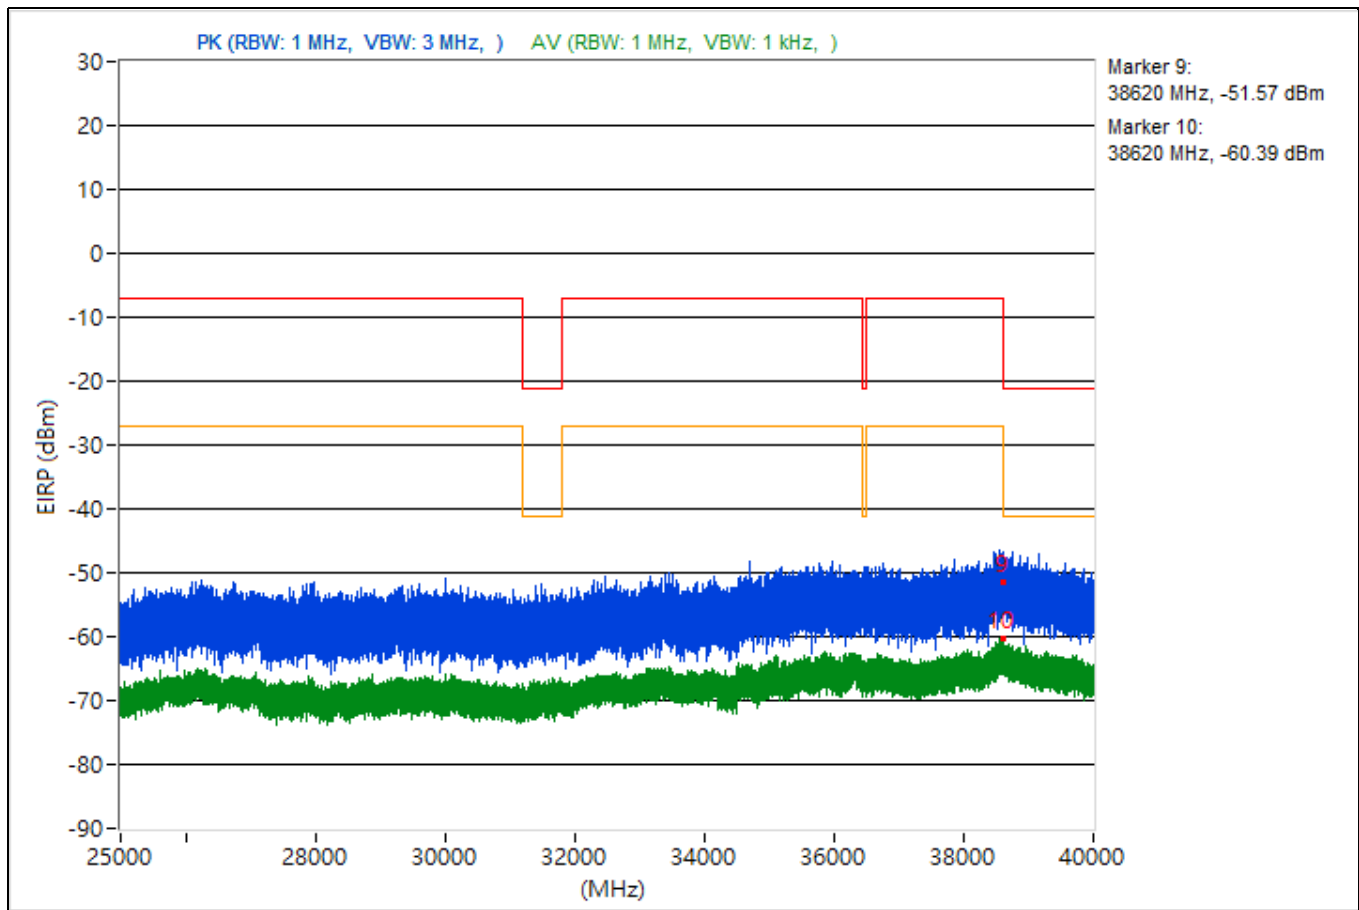


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3784.83	46.94 PK	74	-27.06	-53.24	4.92	-48.32
2	3784.83	36.66 AV	54	-17.34	-63.52	4.92	-58.6
3	14488	47.86 PK	74	-26.14	-52.32	4.92	-47.4
4	14488	35.65 AV	54	-18.35	-64.53	4.92	-59.61
5	19006.8	43.91 PK	74	-30.09	-56.27	4.92	-51.35
6	19006.8	37.47 AV	54	-16.53	-62.71	4.92	-57.79
7	23696.7	46.82 PK	74	-27.18	-53.36	4.92	-48.44
8	23696.7	38.6 AV	54	-15.4	-61.58	4.92	-56.66
9	38602.93	46.18 PK	74	-27.82	-54	4.92	-49.08
10	38602.93	35 AV	54	-19	-65.18	4.92	-60.26

Note: Margin value = Emission Level - Limit value

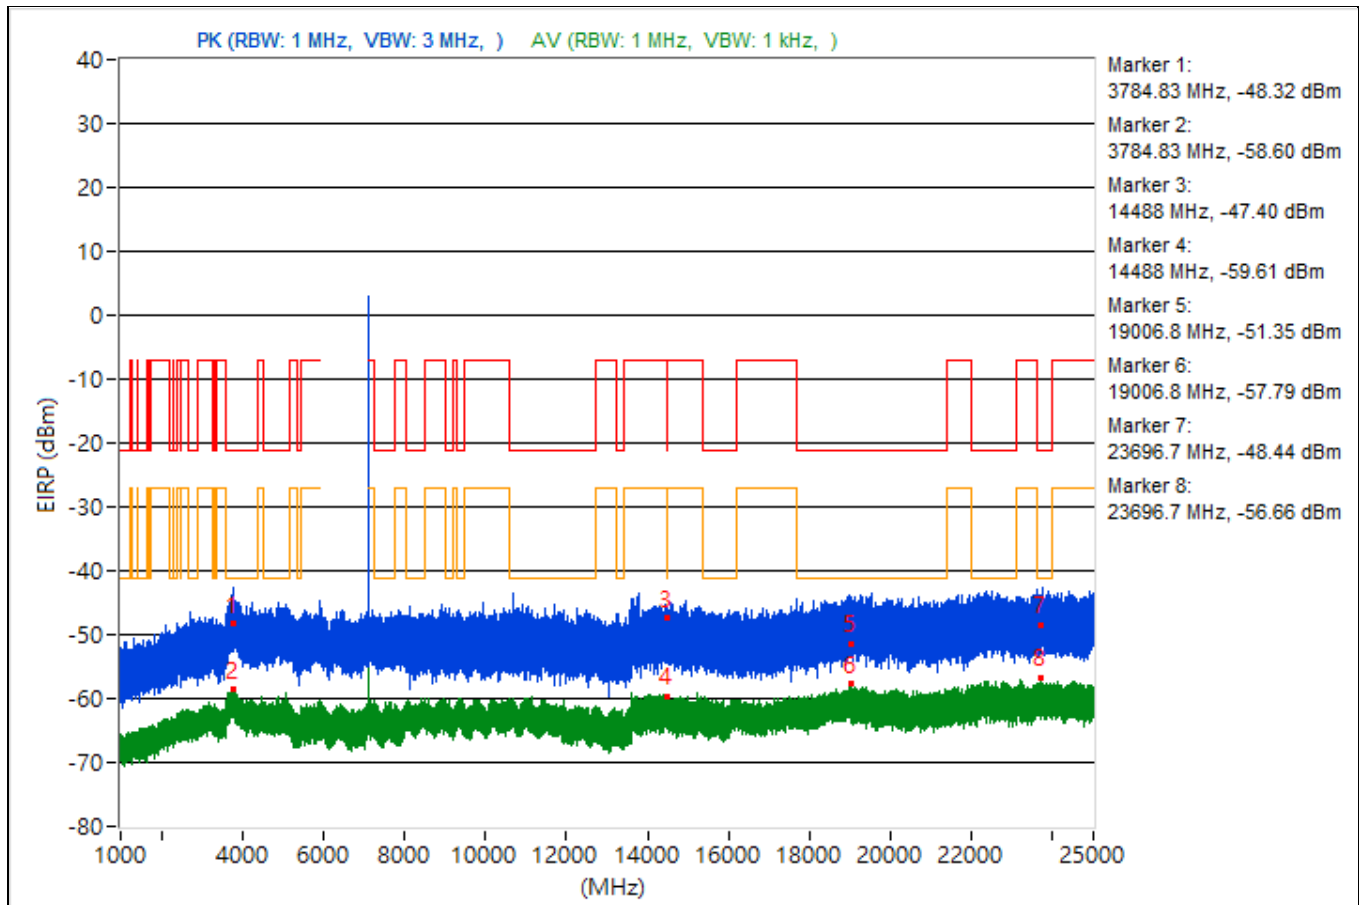


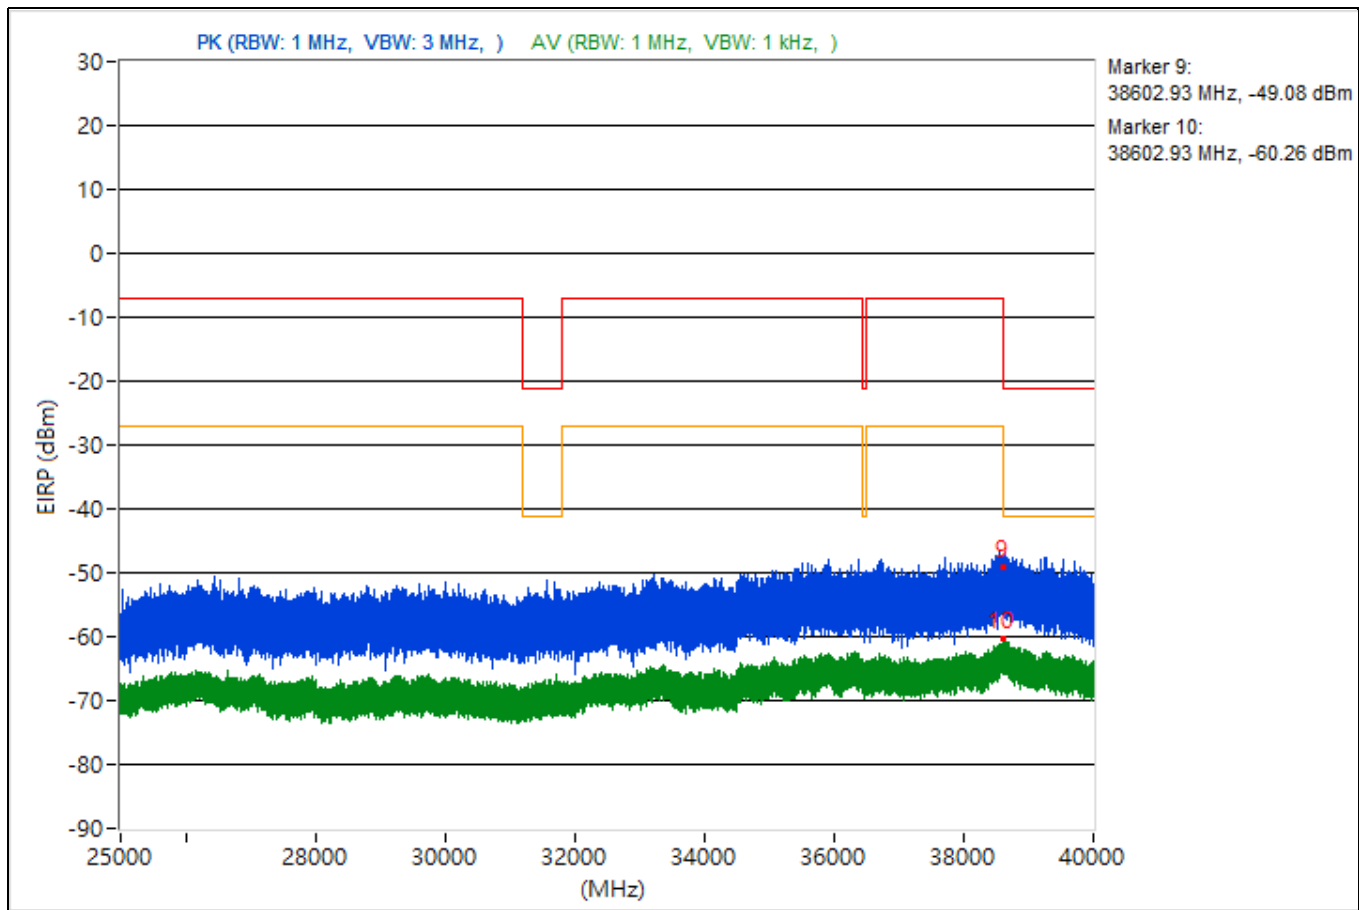


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3735.99	46.54 PK	74	-27.46	-53.64	4.92	-48.72
2	3735.99	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	14496.53	46.83 PK	74	-27.17	-53.35	4.92	-48.43
4	14496.53	34.45 AV	54	-19.55	-65.73	4.92	-60.81
5	19091.2	46.23 PK	74	-27.77	-53.95	4.92	-49.03
6	19091.2	36.79 AV	54	-17.21	-63.39	4.92	-58.47
7	23819.7	43.98 PK	74	-30.02	-56.2	4.92	-51.28
8	23819.7	36.99 AV	54	-17.01	-63.19	4.92	-58.27
9	38602.4	41.8 PK	74	-32.2	-58.38	4.92	-53.46
10	38602.4	33.04 AV	54	-20.96	-67.14	4.92	-62.22

Note: Margin value = Emission Level - Limit value

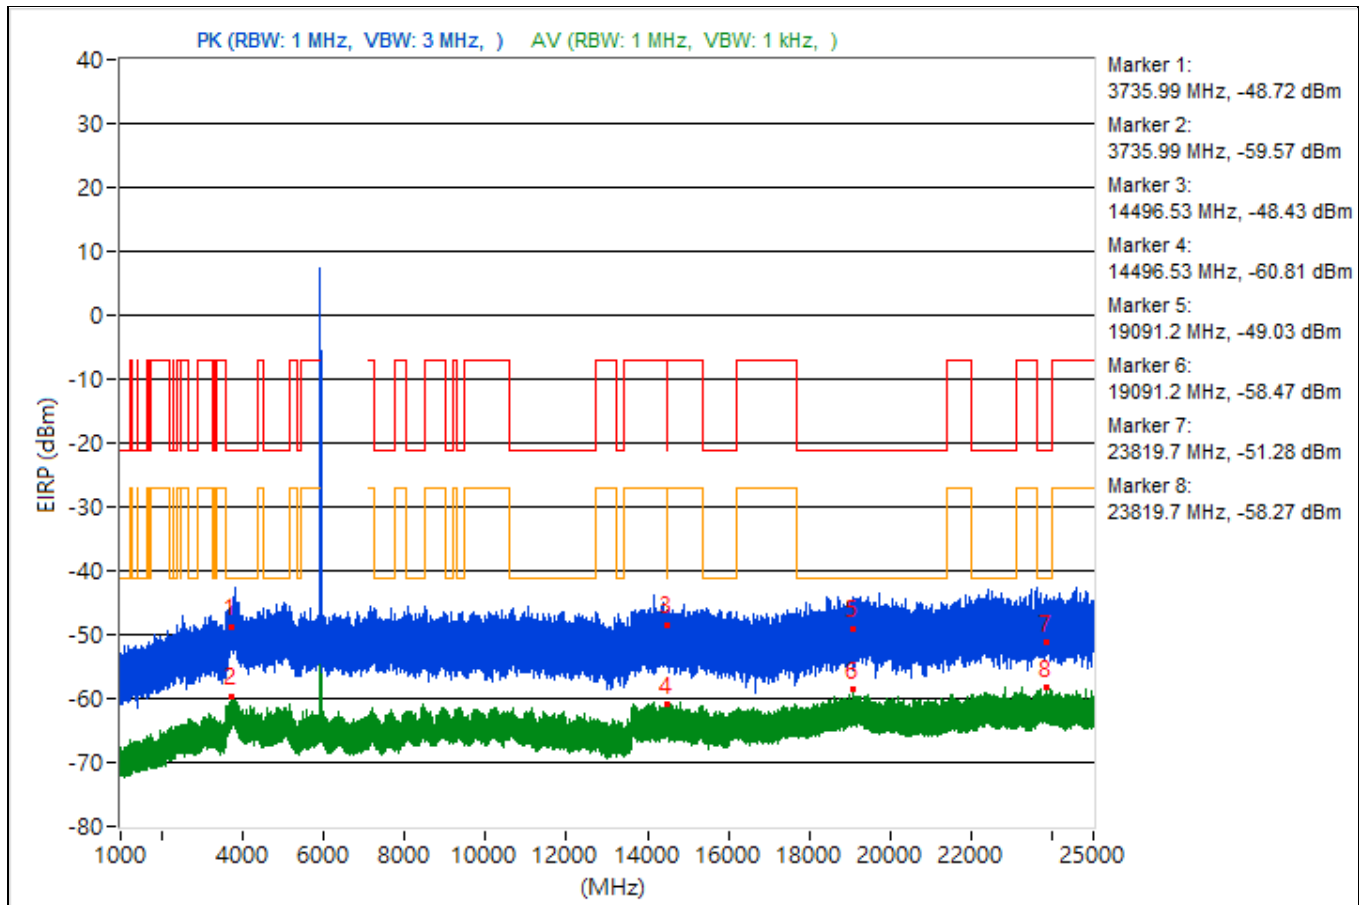


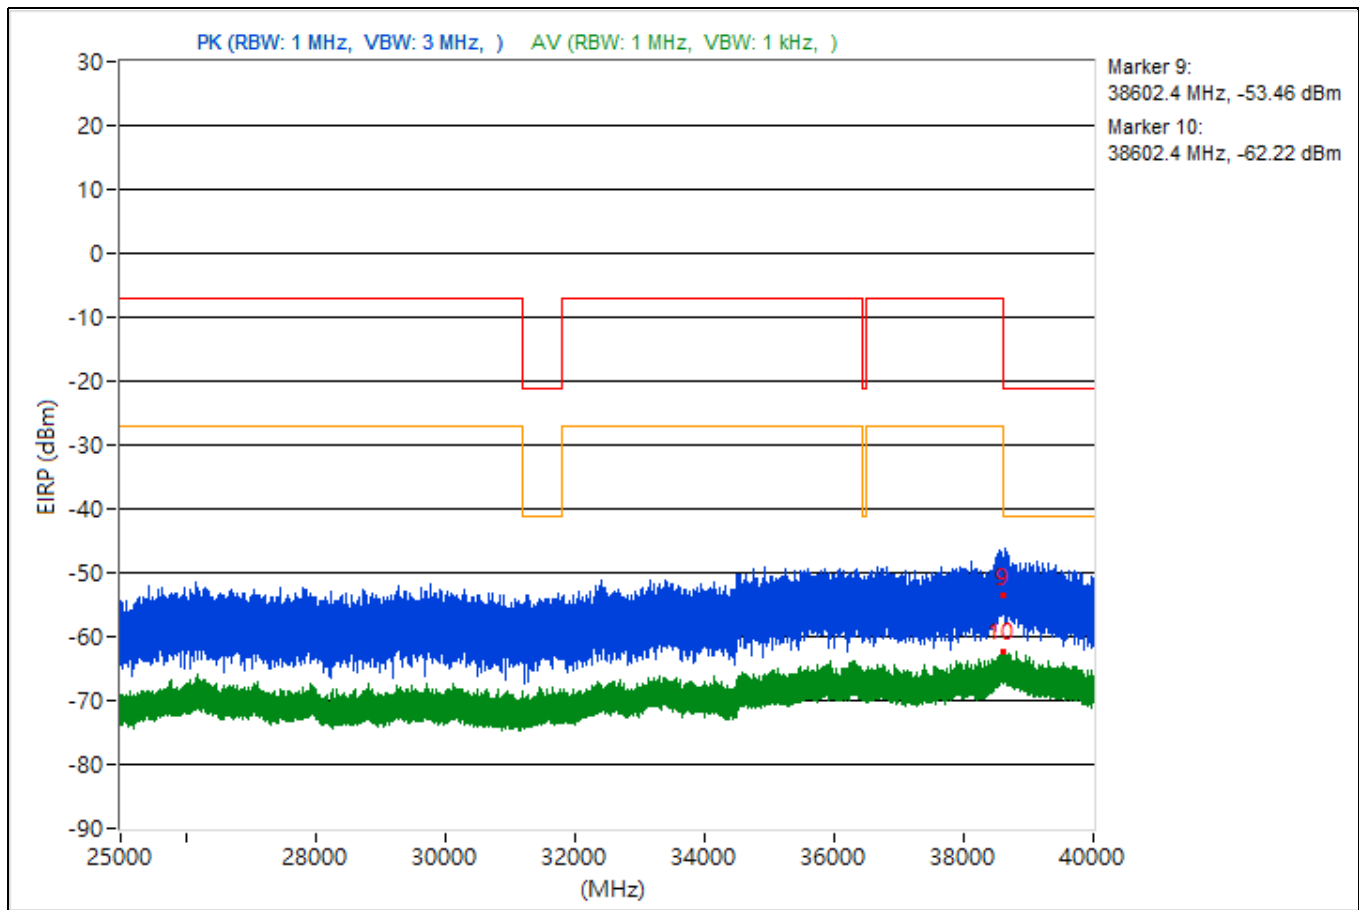


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.13	47.37 PK	74	-26.63	-52.81	4.92	-47.89
2	3770.13	36.14 AV	54	-17.86	-64.04	4.92	-59.12
3	8473.07	41.3 PK	74	-32.7	-58.88	4.92	-53.96
4	8473.07	34.7 AV	54	-19.3	-65.48	4.92	-60.56
5	19209.9	46.79 PK	74	-27.21	-53.39	4.92	-48.47
6	19209.9	36.07 AV	54	-17.93	-64.11	4.92	-59.19
7	22803.2	43.12 PK	74	-30.88	-57.06	4.92	-52.14
8	22803.2	36.89 AV	54	-17.11	-63.29	4.92	-58.37
9	38825.51	39.89 PK	74	-34.11	-60.29	4.92	-55.37
10	38825.51	33.41 AV	54	-20.59	-66.77	4.92	-61.85

Note: Margin value = Emission Level - Limit value

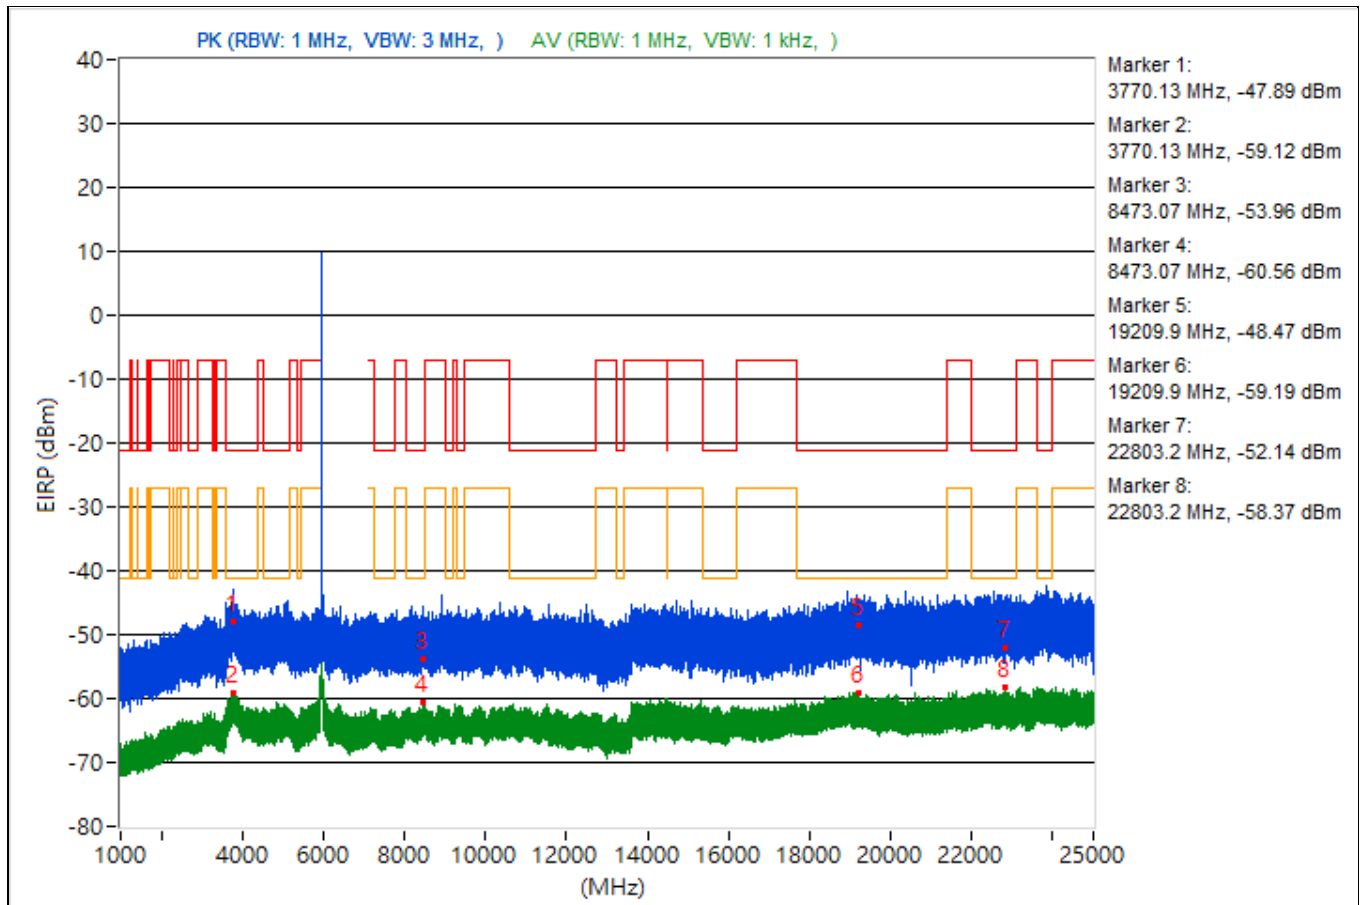


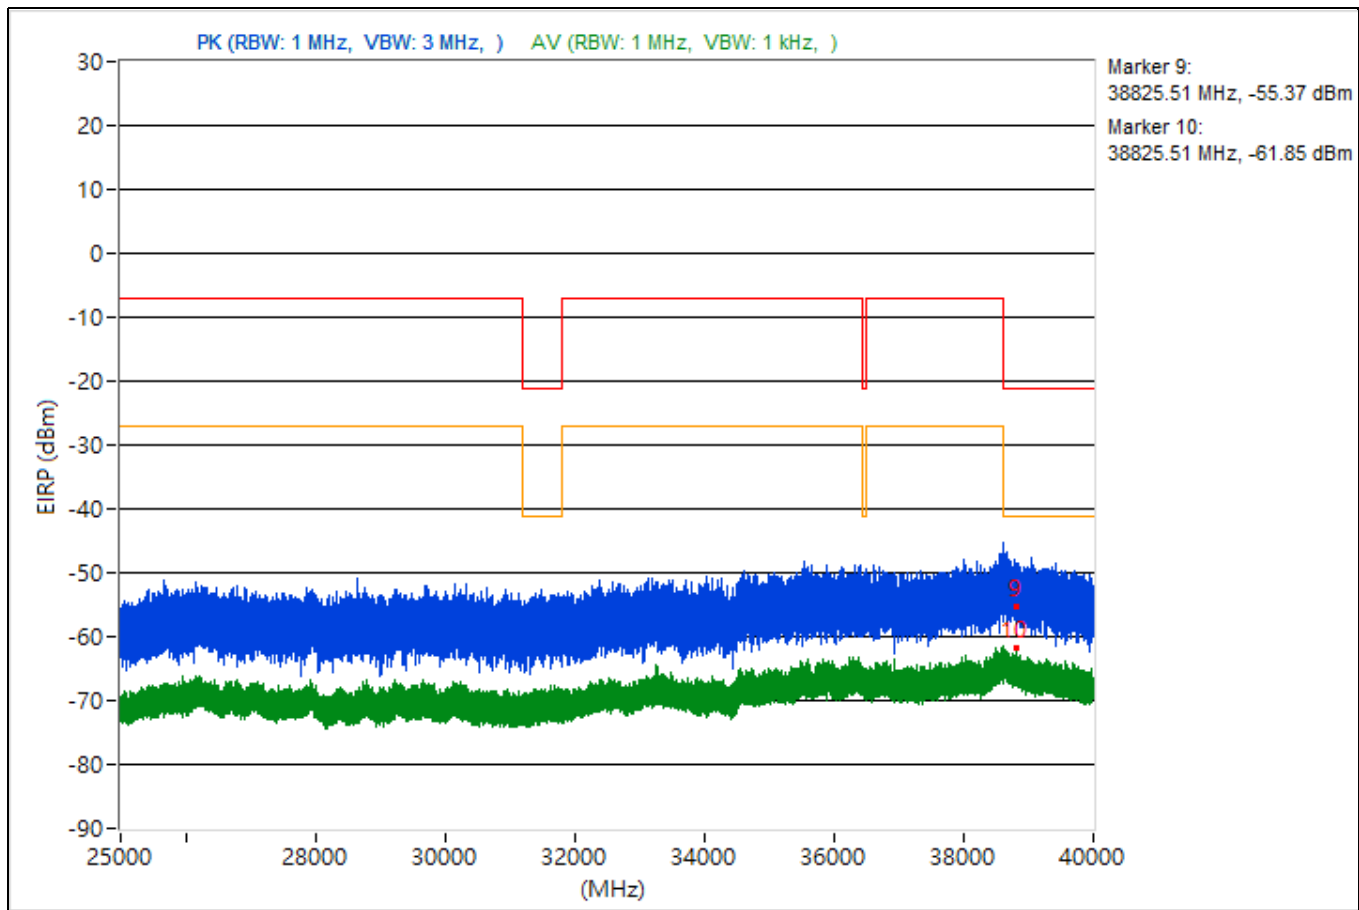


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3800.47	47.14 PK	74	-26.86	-53.04	4.92	-48.12
2	3800.47	35.72 AV	54	-18.28	-64.46	4.92	-59.54
3	14492.36	44.31 PK	74	-29.69	-55.87	4.92	-50.95
4	14492.36	35.23 AV	54	-18.77	-64.95	4.92	-60.03
5	19341.6	49.28 PK	74	-24.72	-50.9	4.92	-45.98
6	19341.6	36.85 AV	54	-17.15	-63.33	4.92	-58.41
7	23829.4	45.47 PK	74	-28.53	-54.71	4.92	-49.79
8	23829.4	37 AV	54	-17	-63.18	4.92	-58.26
9	38635.56	42.97 PK	74	-31.03	-57.21	4.92	-52.29
10	38635.56	33.47 AV	54	-20.53	-66.71	4.92	-61.79

Note: Margin value = Emission Level - Limit value

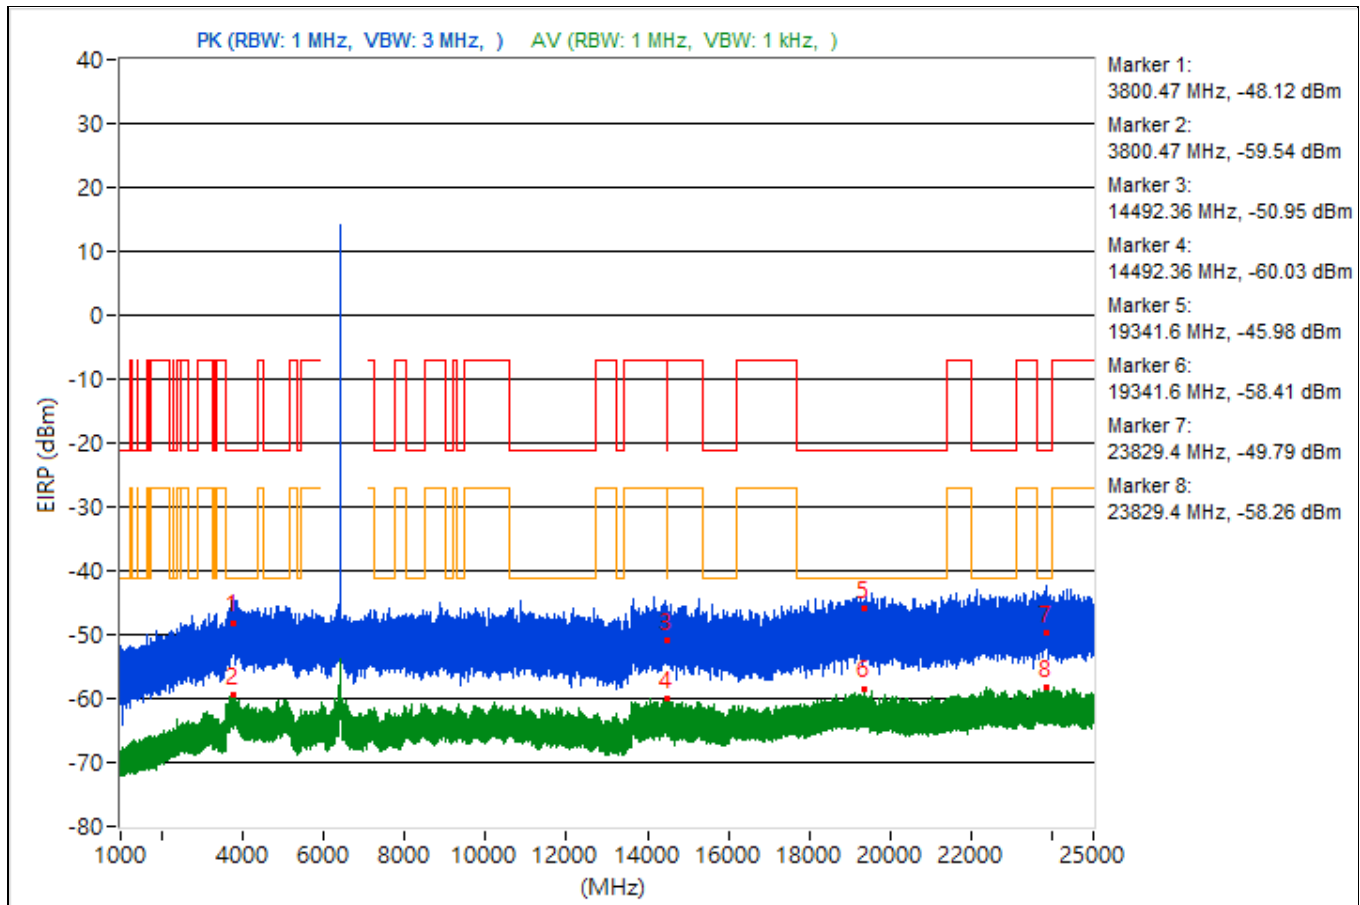


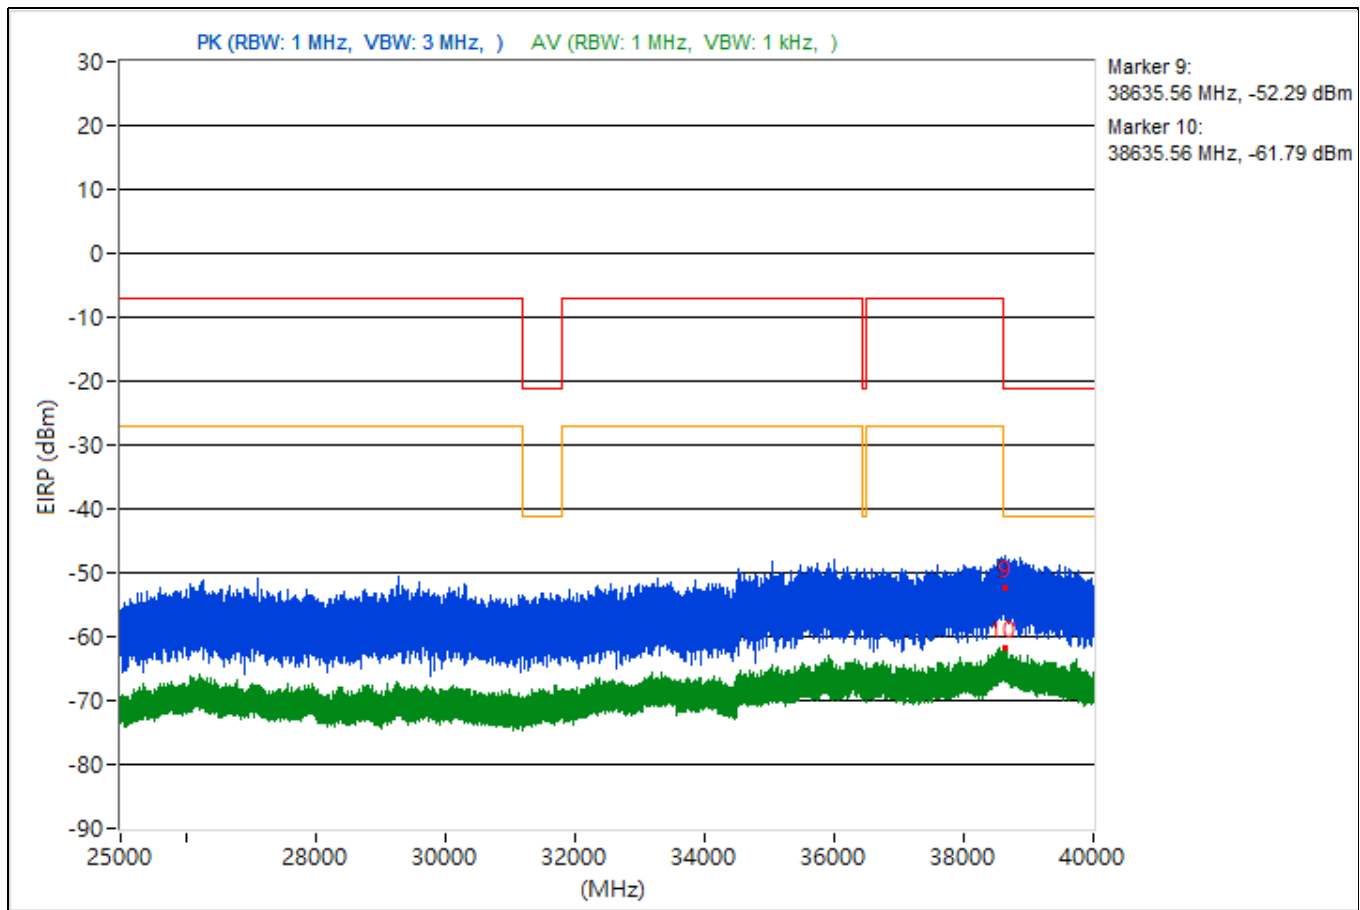


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3855.53	45.94 PK	74	-28.06	-54.24	4.92	-49.32
2	3855.53	35.4 AV	54	-18.6	-64.78	4.92	-59.86
3	14489.51	43.92 PK	74	-30.08	-56.26	4.92	-51.34
4	14489.51	35.43 AV	54	-18.57	-64.75	4.92	-59.83
5	19220.7	45.5 PK	74	-28.5	-54.68	4.92	-49.76
6	19220.7	36.19 AV	54	-17.81	-63.99	4.92	-59.07
7	22829.9	45.06 PK	74	-28.94	-55.12	4.92	-50.2
8	22829.9	36.84 AV	54	-17.16	-63.34	4.92	-58.42
9	38877.96	41.25 PK	74	-32.75	-58.93	4.92	-54.01
10	38877.96	33.16 AV	54	-20.84	-67.02	4.92	-62.1

Note: Margin value = Emission Level - Limit value

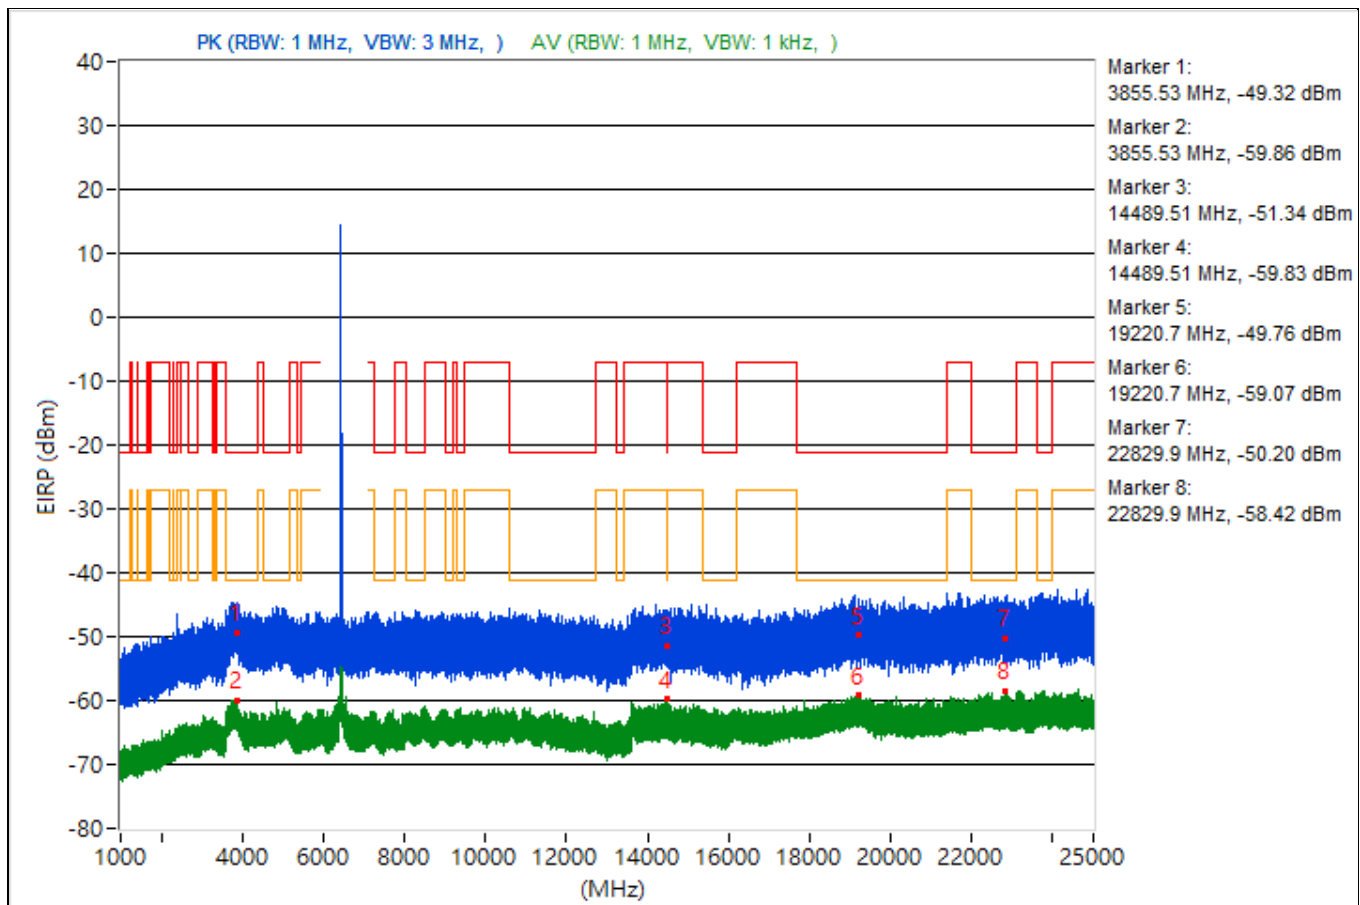


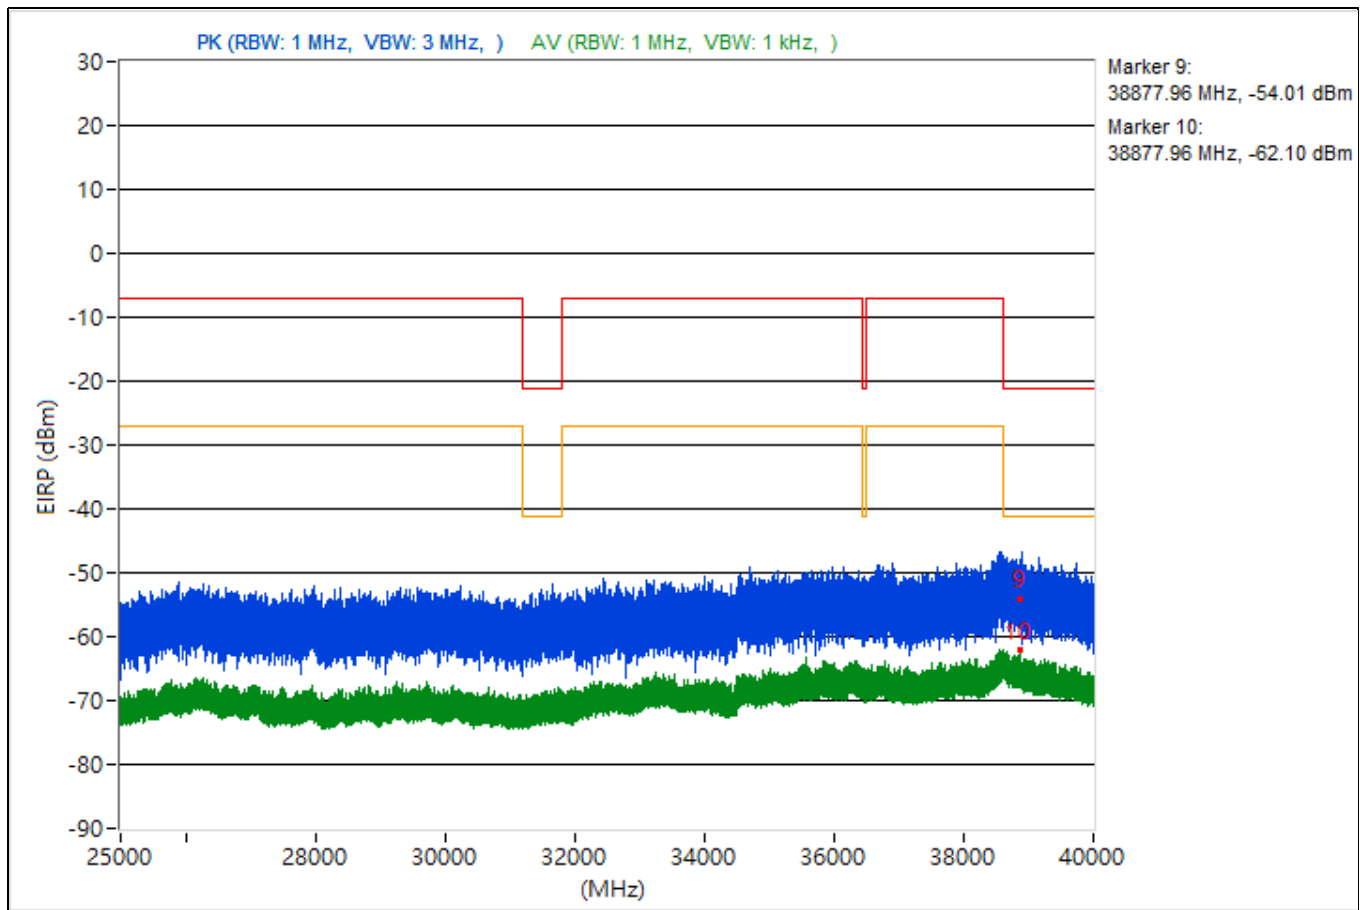


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3753.02	47.28 PK	74	-26.72	-52.9	4.92	-47.98
2	3753.02	35.95 AV	54	-18.05	-64.23	4.92	-59.31
3	14480.89	43.81 PK	74	-30.19	-56.37	4.92	-51.45
4	14480.89	34.74 AV	54	-19.26	-65.44	4.92	-60.52
5	19123	48.58 PK	74	-25.42	-51.6	4.92	-46.68
6	19123	36.59 AV	54	-17.41	-63.59	4.92	-58.67
7	22343.1	47.94 PK	74	-26.06	-52.24	4.92	-47.32
8	22343.1	37.01 AV	54	-16.99	-63.17	4.92	-58.25
9	38609.6	41.74 PK	74	-32.26	-58.44	4.92	-53.52
10	38609.6	33.79 AV	54	-20.21	-66.39	4.92	-61.47

Note: Margin value = Emission Level - Limit value

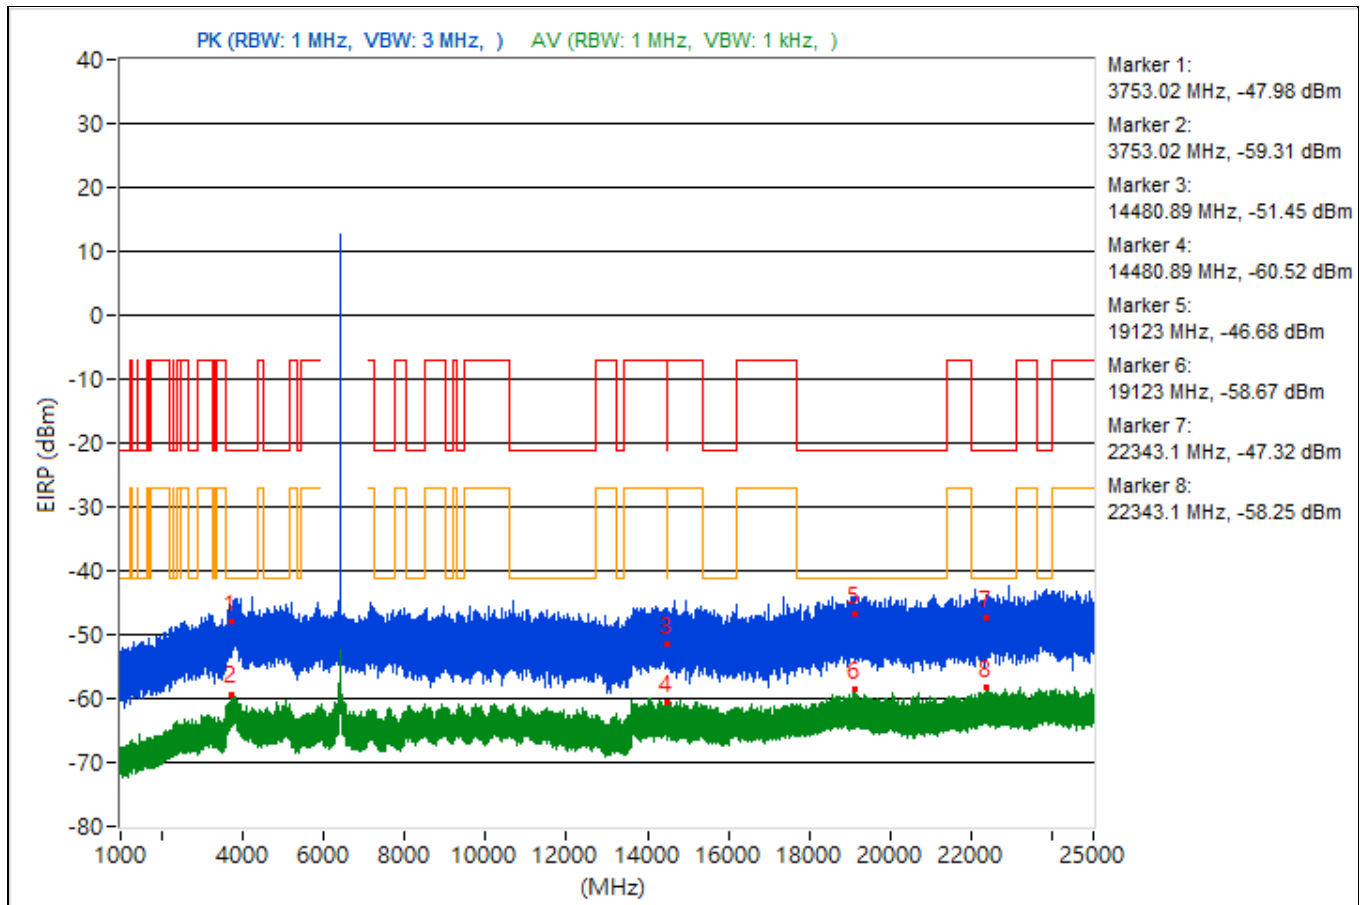


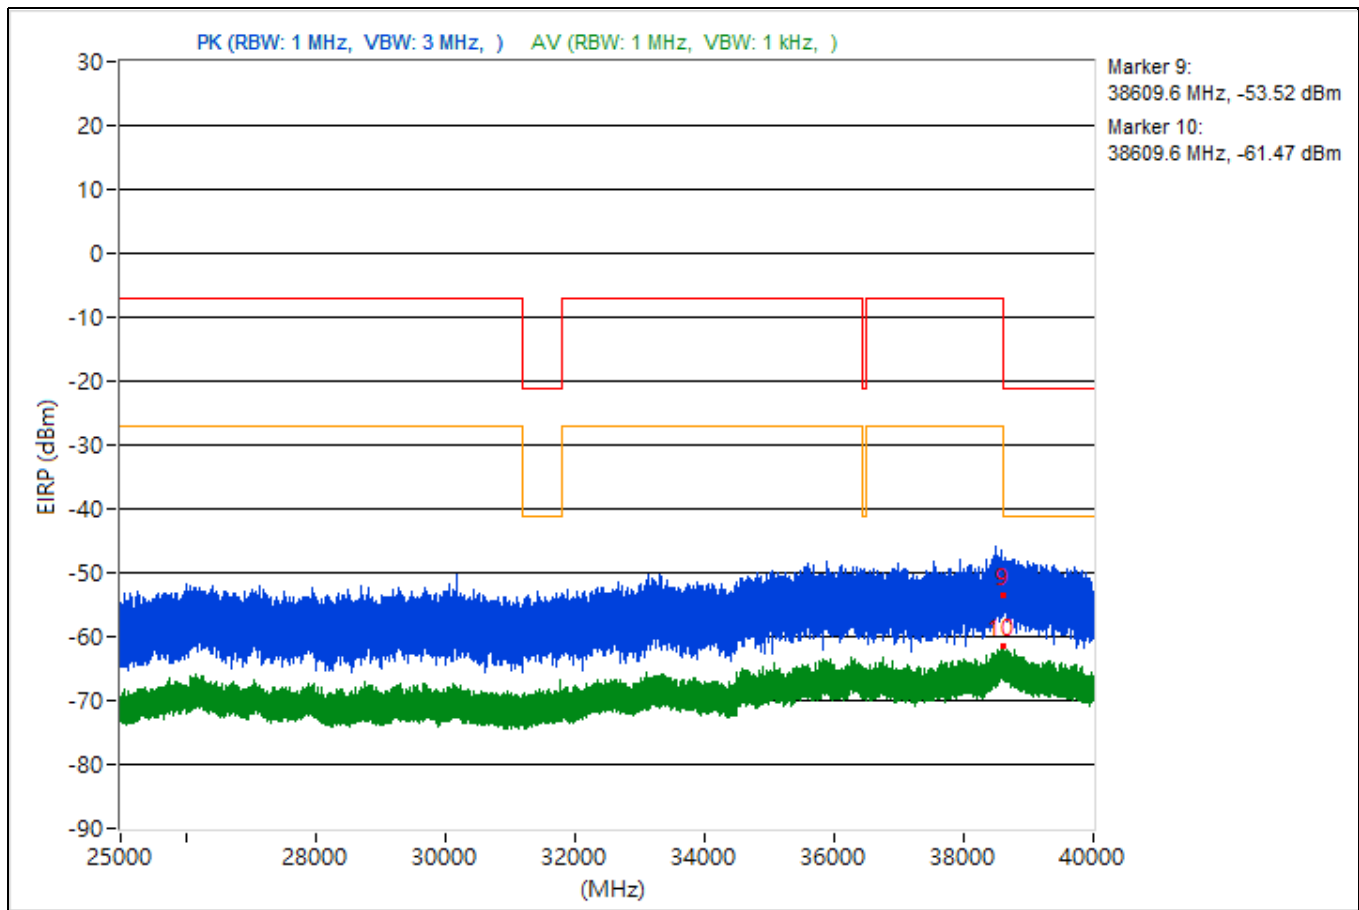


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.47	48.24 PK	74	-25.76	-51.94	4.92	-47.02
2	3814.47	35.53 AV	54	-18.47	-64.65	4.92	-59.73
3	15359.73	47.27 PK	74	-26.73	-52.91	4.92	-47.99
4	15359.73	34.5 AV	54	-19.5	-65.68	4.92	-60.76
5	19075.5	47.02 PK	74	-26.98	-53.16	4.92	-48.24
6	19075.5	36.55 AV	54	-17.45	-63.63	4.92	-58.71
7	23872.3	46.7 PK	74	-27.3	-53.48	4.92	-48.56
8	23872.3	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38609.33	41.62 PK	74	-32.38	-58.56	4.92	-53.64
10	38609.33	33.1 AV	54	-20.9	-67.08	4.92	-62.16

Note: Margin value = Emission Level - Limit value

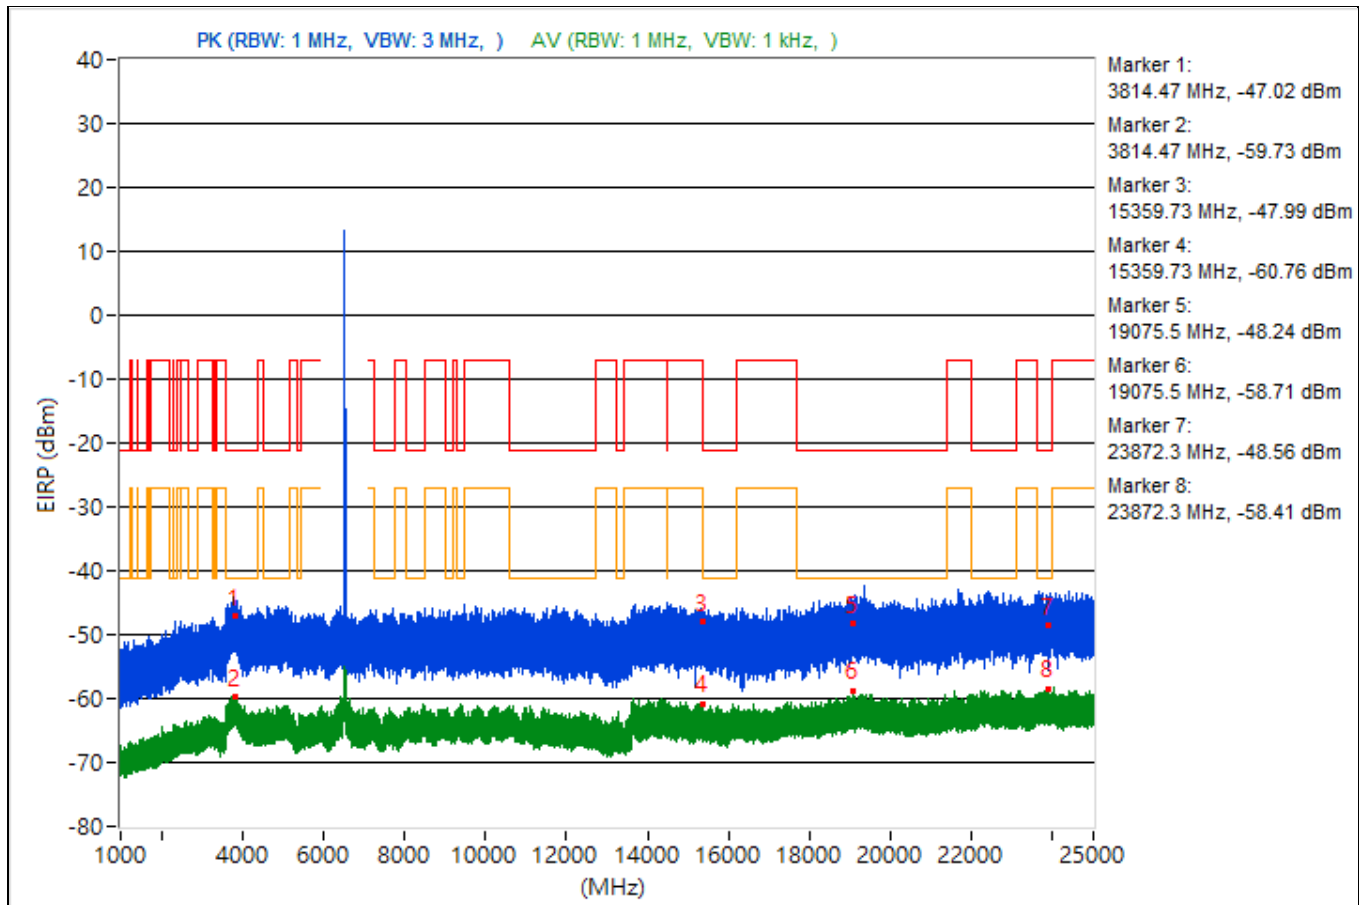


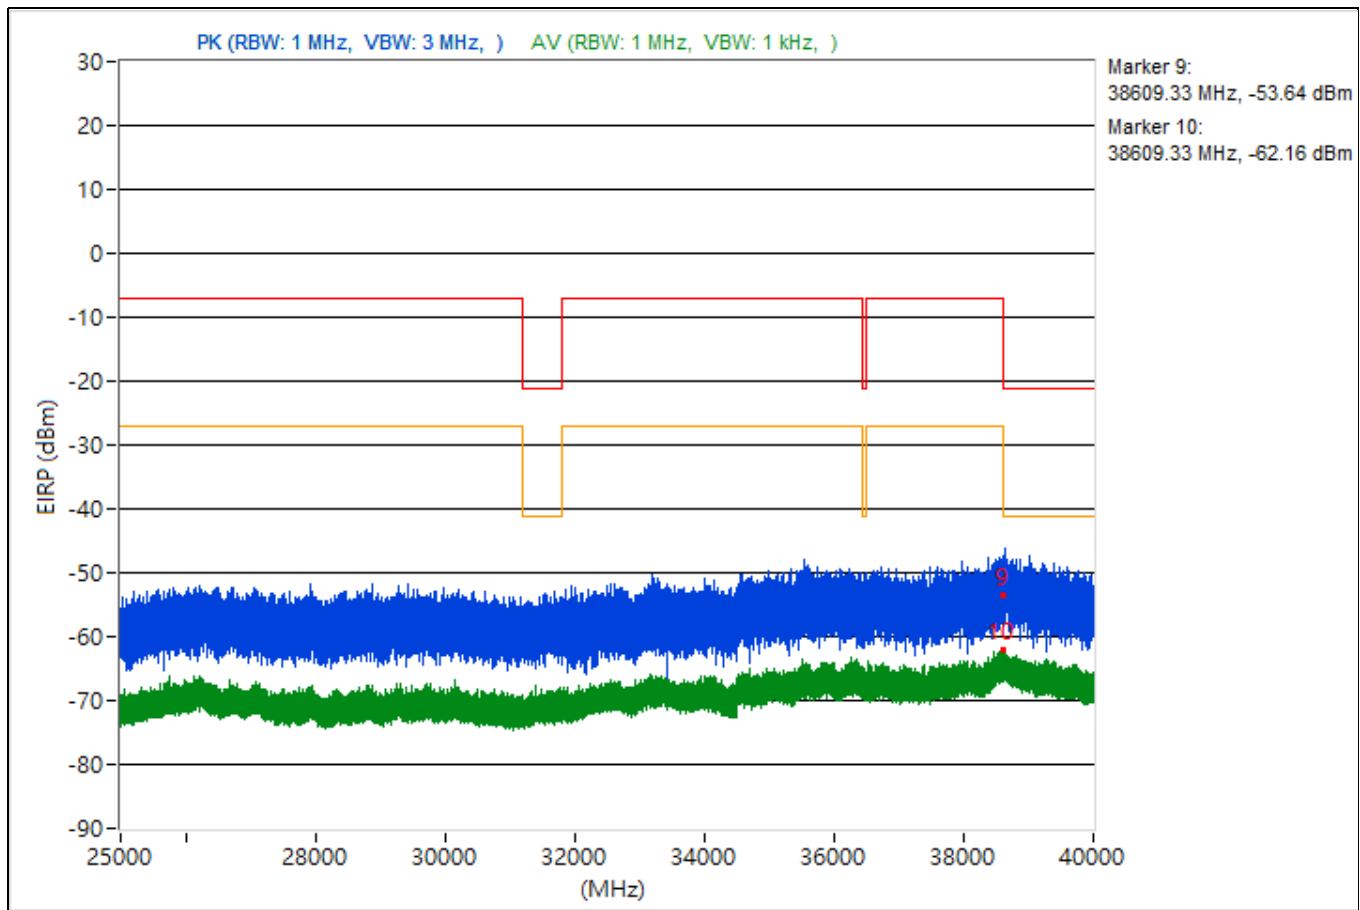


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3868.13	46.25 PK	74	-27.75	-53.93	4.92	-49.01
2	3868.13	35.92 AV	54	-18.08	-64.26	4.92	-59.34
3	9009.87	44.91 PK	74	-29.09	-55.27	4.92	-50.35
4	9009.87	34.71 AV	54	-19.29	-65.47	4.92	-60.55
5	19357.5	43.01 PK	74	-30.99	-57.17	4.92	-52.25
6	19357.5	36.67 AV	54	-17.33	-63.51	4.92	-58.59
7	23957.4	48.13 PK	74	-25.87	-52.05	4.92	-47.13
8	23957.4	37.22 AV	54	-16.78	-62.96	4.92	-58.04
9	38632.98	34.7 PK	74	-39.3	-65.48	4.92	-60.56
10	38632.98	33.11 AV	54	-20.89	-67.07	4.92	-62.15

Note: Margin value = Emission Level - Limit value

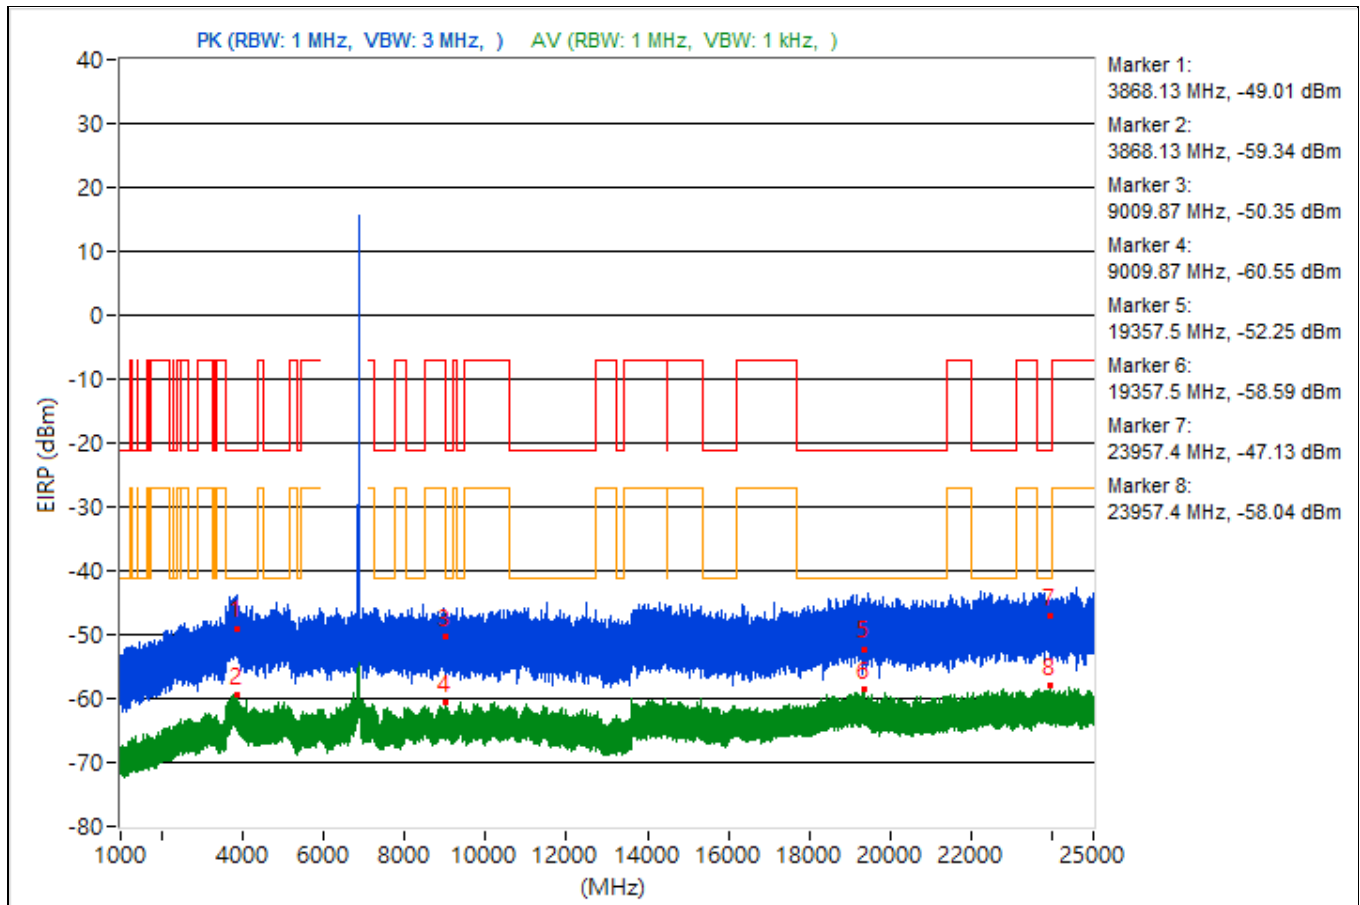


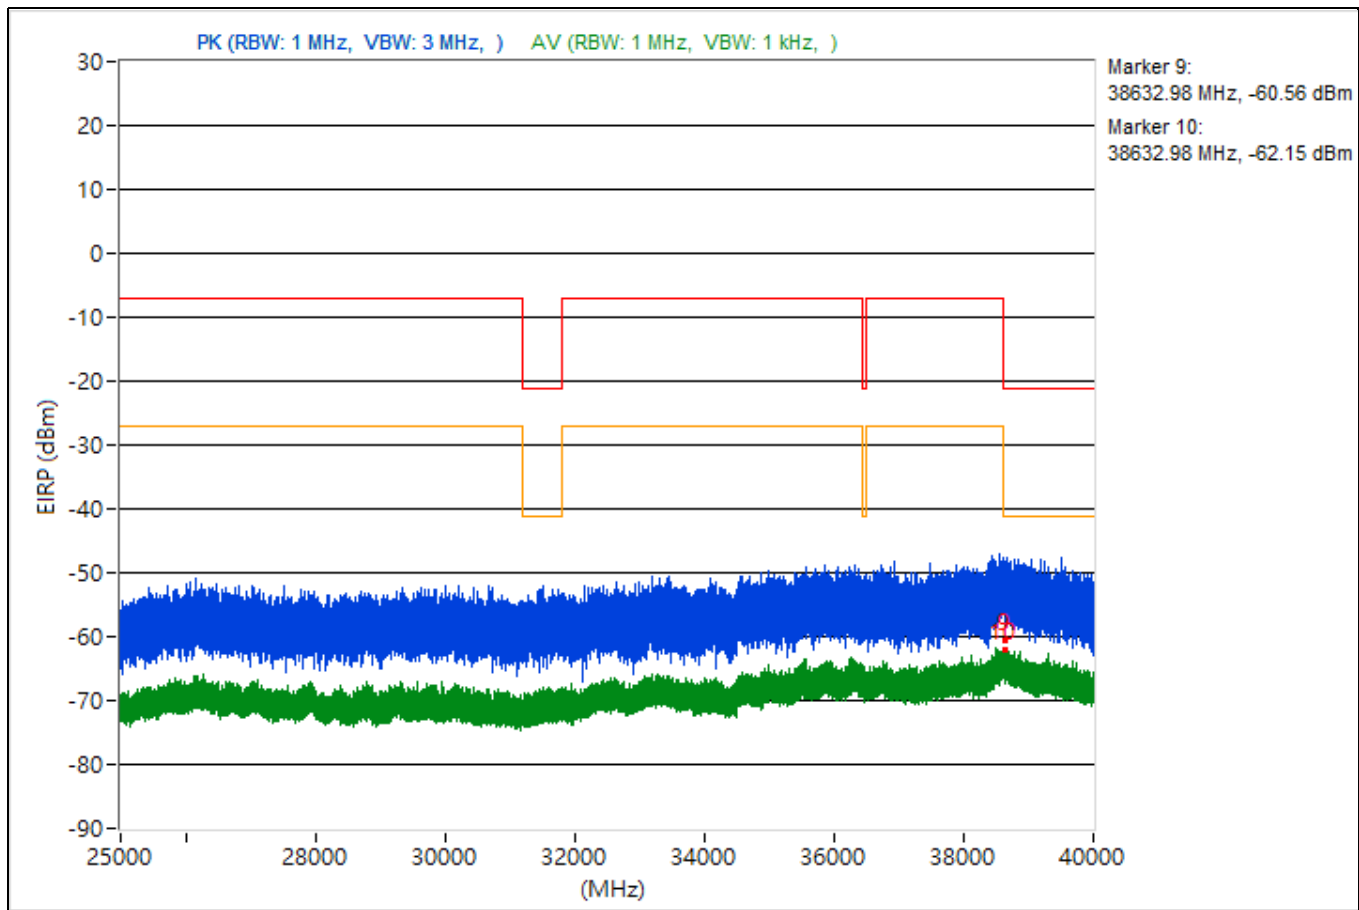


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.83	44.78 PK	74	-29.22	-55.4	4.92	-50.48
2	3770.83	35.61 AV	54	-18.39	-64.57	4.92	-59.65
3	14496.44	44.77 PK	74	-29.23	-55.41	4.92	-50.49
4	14496.44	35.2 AV	54	-18.8	-64.98	4.92	-60.06
5	19205.7	47.55 PK	74	-26.45	-52.63	4.92	-47.71
6	19205.7	35.81 AV	54	-18.19	-64.37	4.92	-59.45
7	23626.5	46.22 PK	74	-27.78	-53.96	4.92	-49.04
8	23626.5	36.91 AV	54	-17.09	-63.27	4.92	-58.35
9	38775.11	40.58 PK	74	-33.42	-59.6	4.92	-54.68
10	38775.11	33.15 AV	54	-20.85	-67.03	4.92	-62.11

Note: Margin value = Emission Level - Limit value

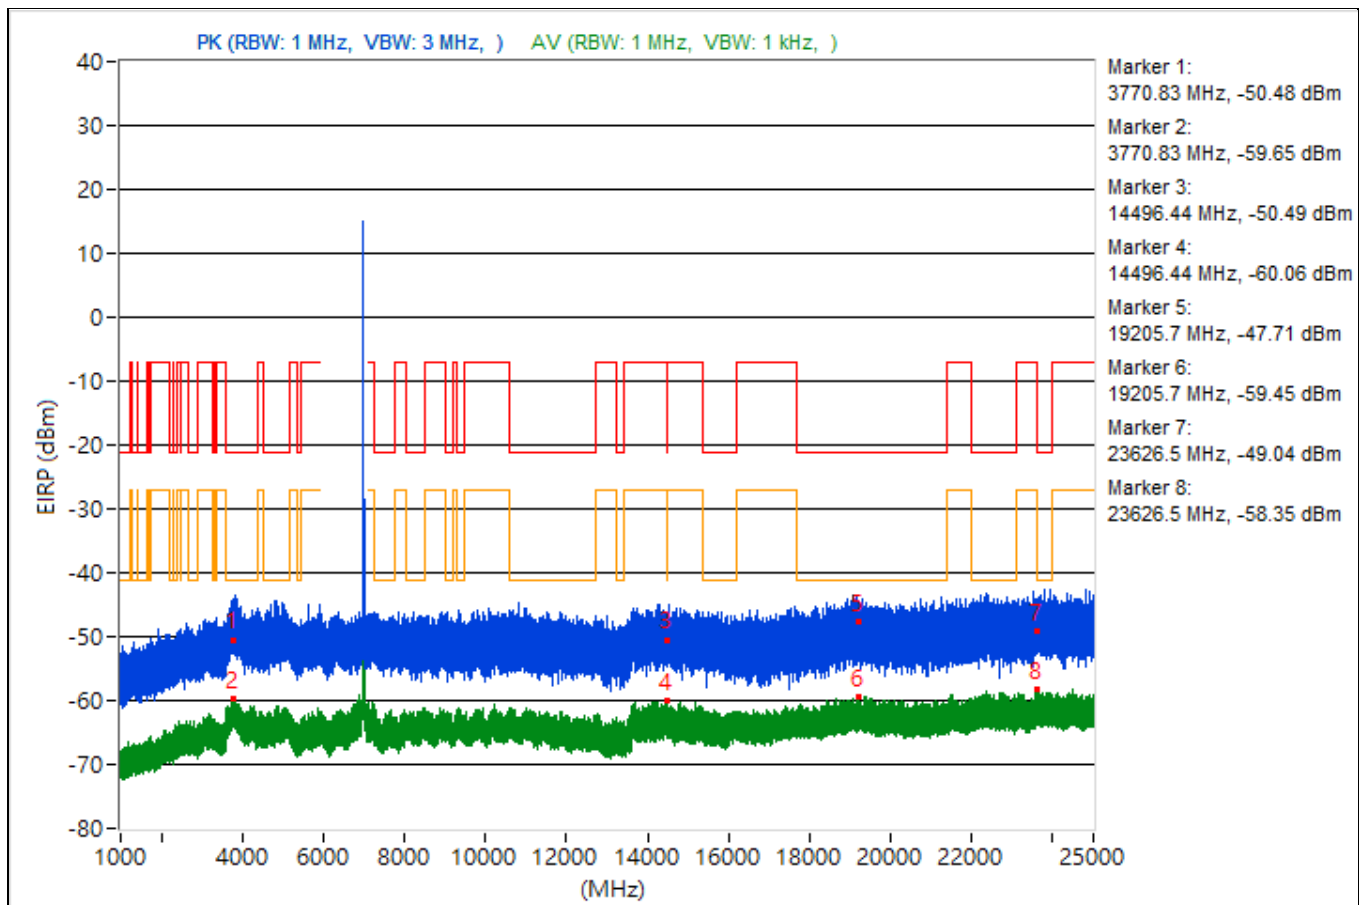


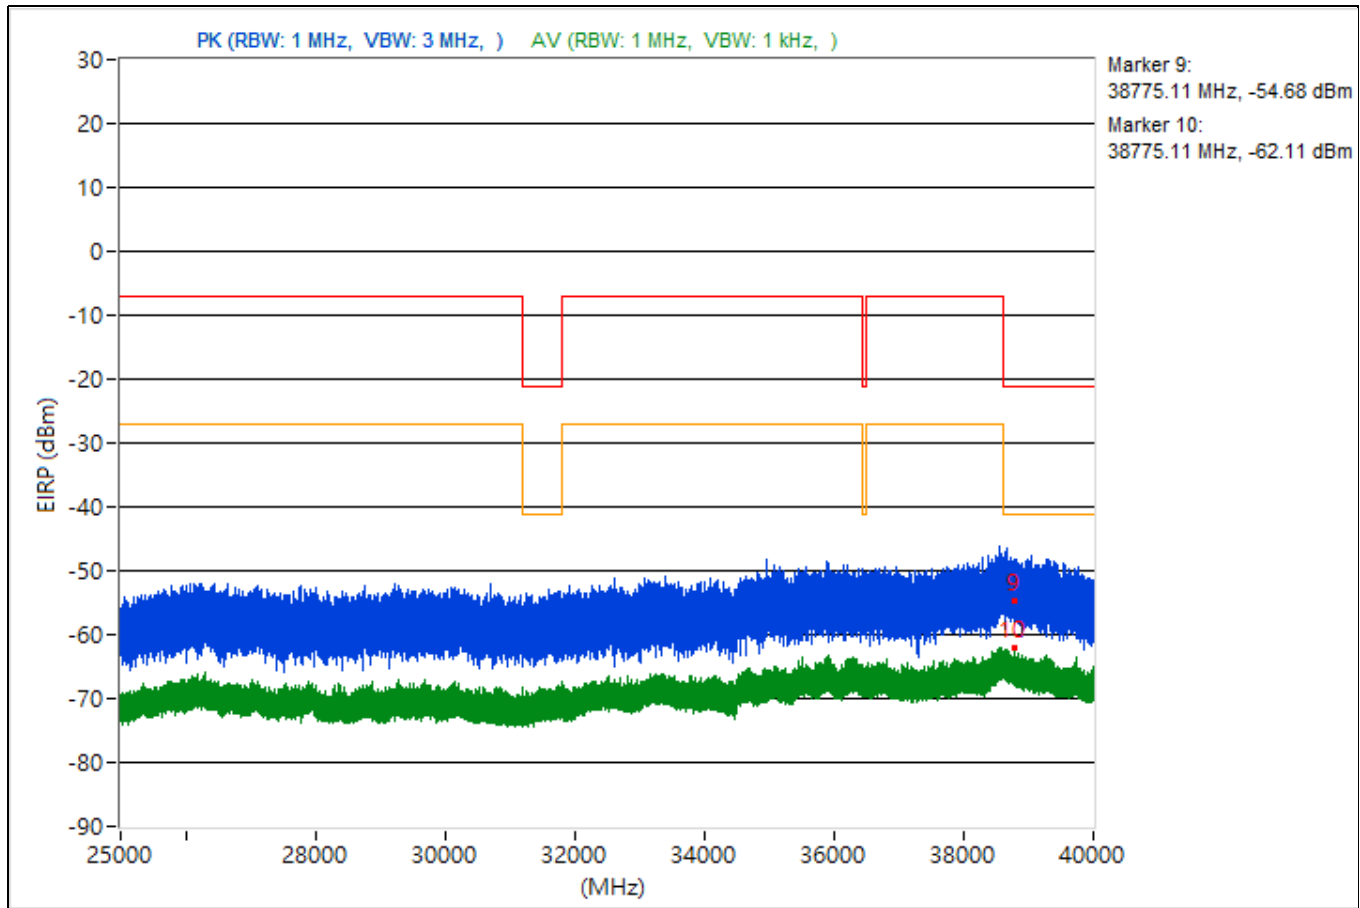


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3733.19	44.99 PK	74	-29.01	-55.19	4.92	-50.27
2	3733.19	35.93 AV	54	-18.07	-64.25	4.92	-59.33
3	15394.67	43.74 PK	74	-30.26	-56.44	4.92	-51.52
4	15394.67	34.79 AV	54	-19.21	-65.39	4.92	-60.47
5	19165.8	47.02 PK	74	-26.98	-53.16	4.92	-48.24
6	19165.8	36.35 AV	54	-17.65	-63.83	4.92	-58.91
7	22317.3	48.59 PK	74	-25.41	-51.59	4.92	-46.67
8	22317.3	37.59 AV	54	-16.41	-62.59	4.92	-57.67
9	38652.98	43.46 PK	74	-30.54	-56.72	4.92	-51.8
10	38652.98	34.7 AV	54	-19.3	-65.48	4.92	-60.56

Note: Margin value = Emission Level - Limit value

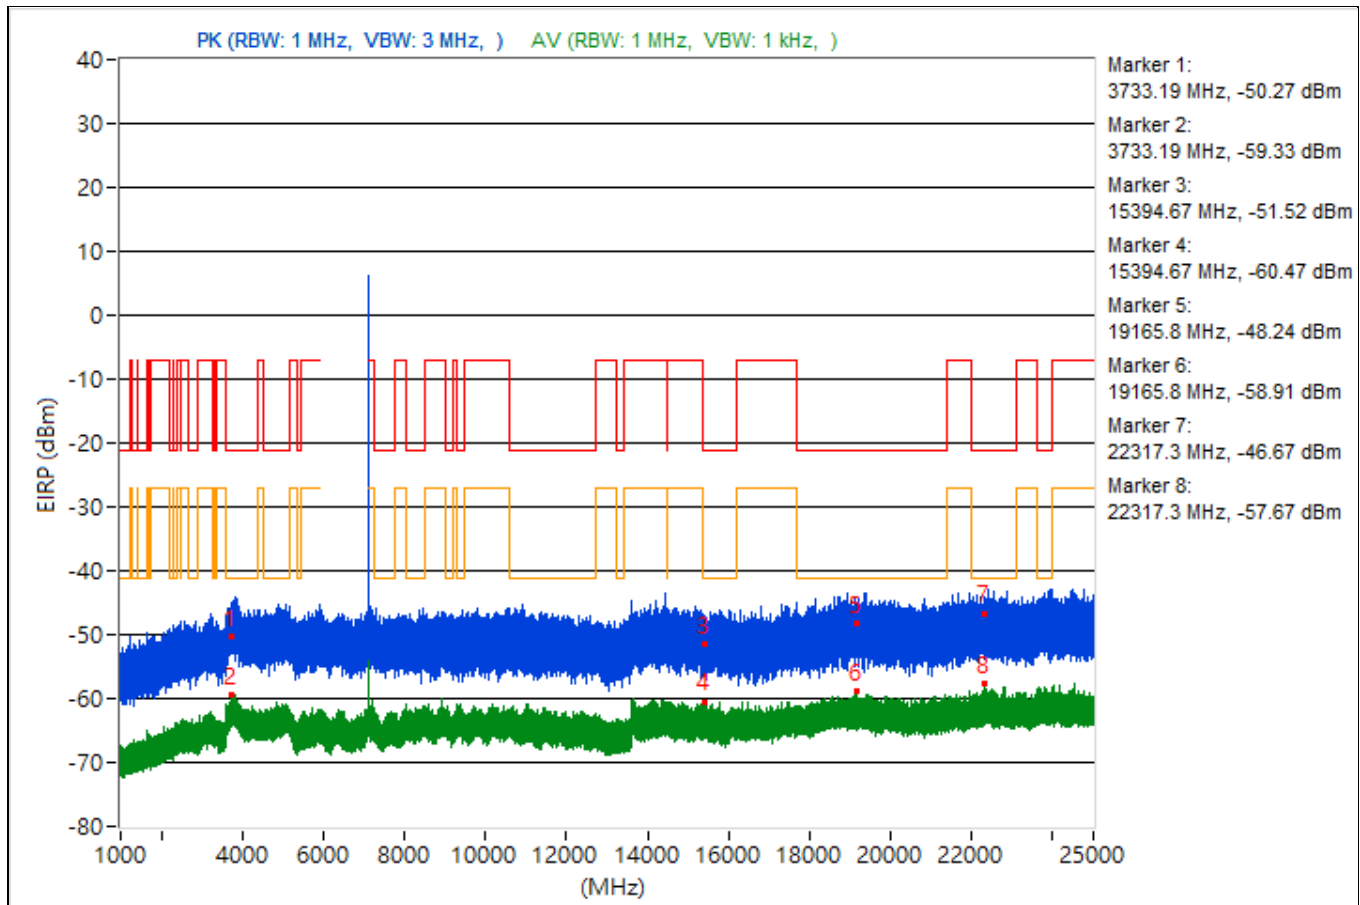


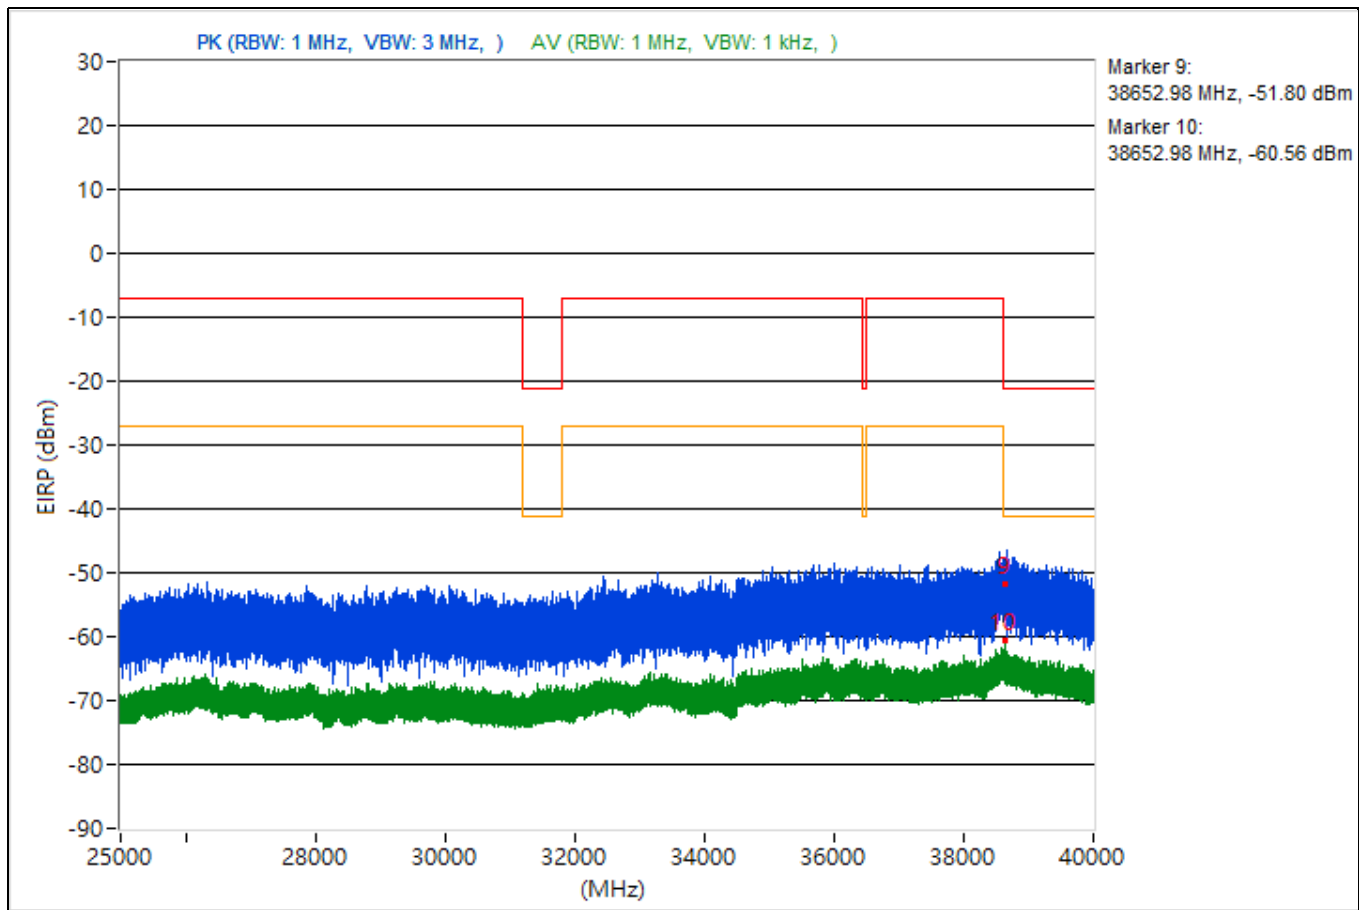


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.68	47.09 PK	74	-26.91	-53.09	4.92	-48.17
2	3756.68	36.1 AV	54	-17.9	-64.08	4.92	-59.16
3	14482.58	41.35 PK	74	-32.65	-58.83	4.92	-53.91
4	14482.58	34.85 AV	54	-19.15	-65.33	4.92	-60.41
5	19230.1	43.56 PK	74	-30.44	-56.62	4.92	-51.7
6	19230.1	36.2 AV	54	-17.8	-63.98	4.92	-59.06
7	23884.9	44.31 PK	74	-29.69	-55.87	4.92	-50.95
8	23884.9	37.32 AV	54	-16.68	-62.86	4.92	-57.94
9	38624.62	46.15 PK	74	-27.85	-54.03	4.92	-49.11
10	38624.62	33.49 AV	54	-20.51	-66.69	4.92	-61.77

Note: Margin value = Emission Level - Limit value

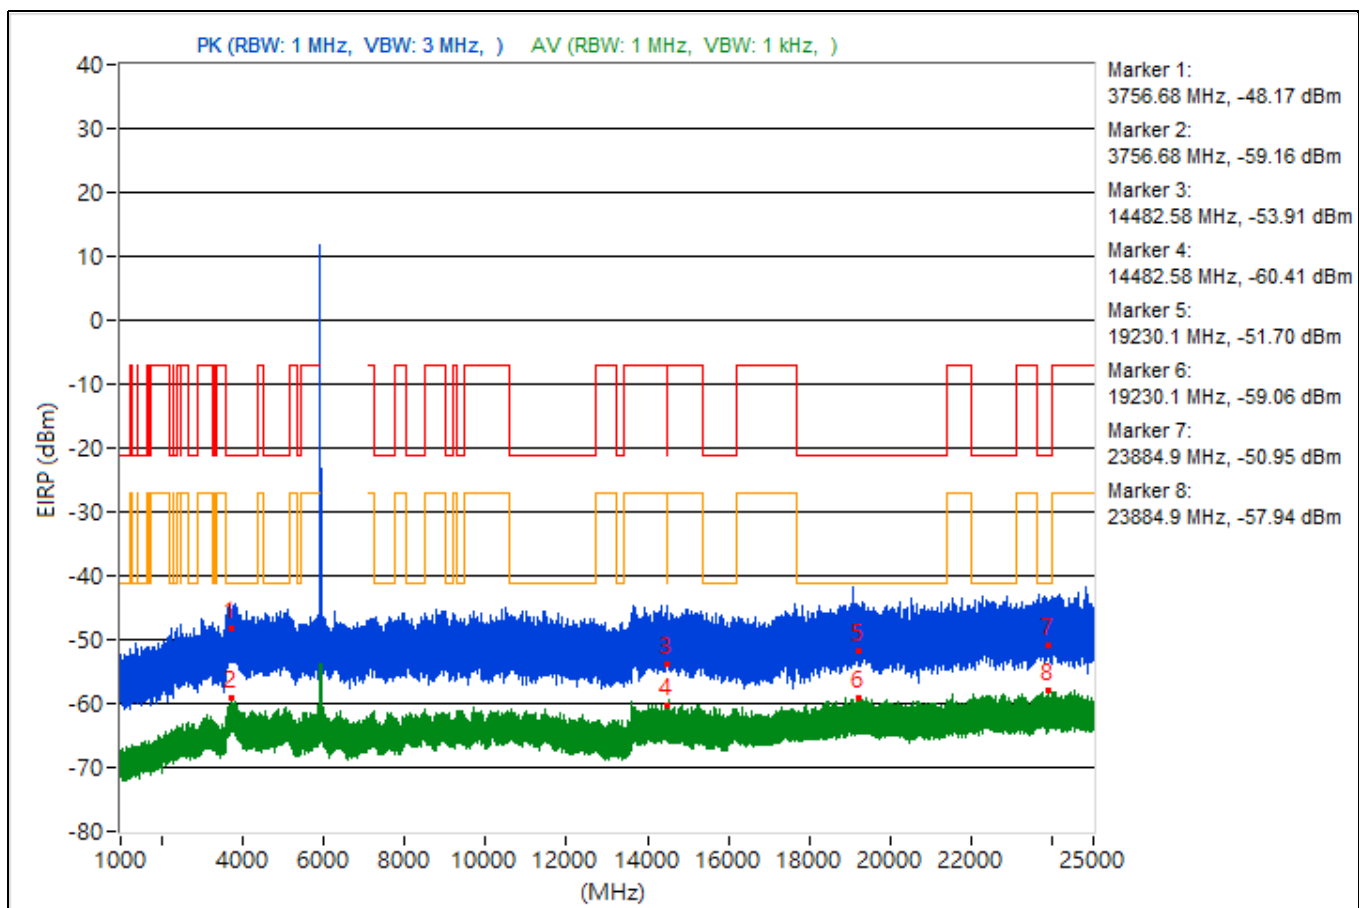


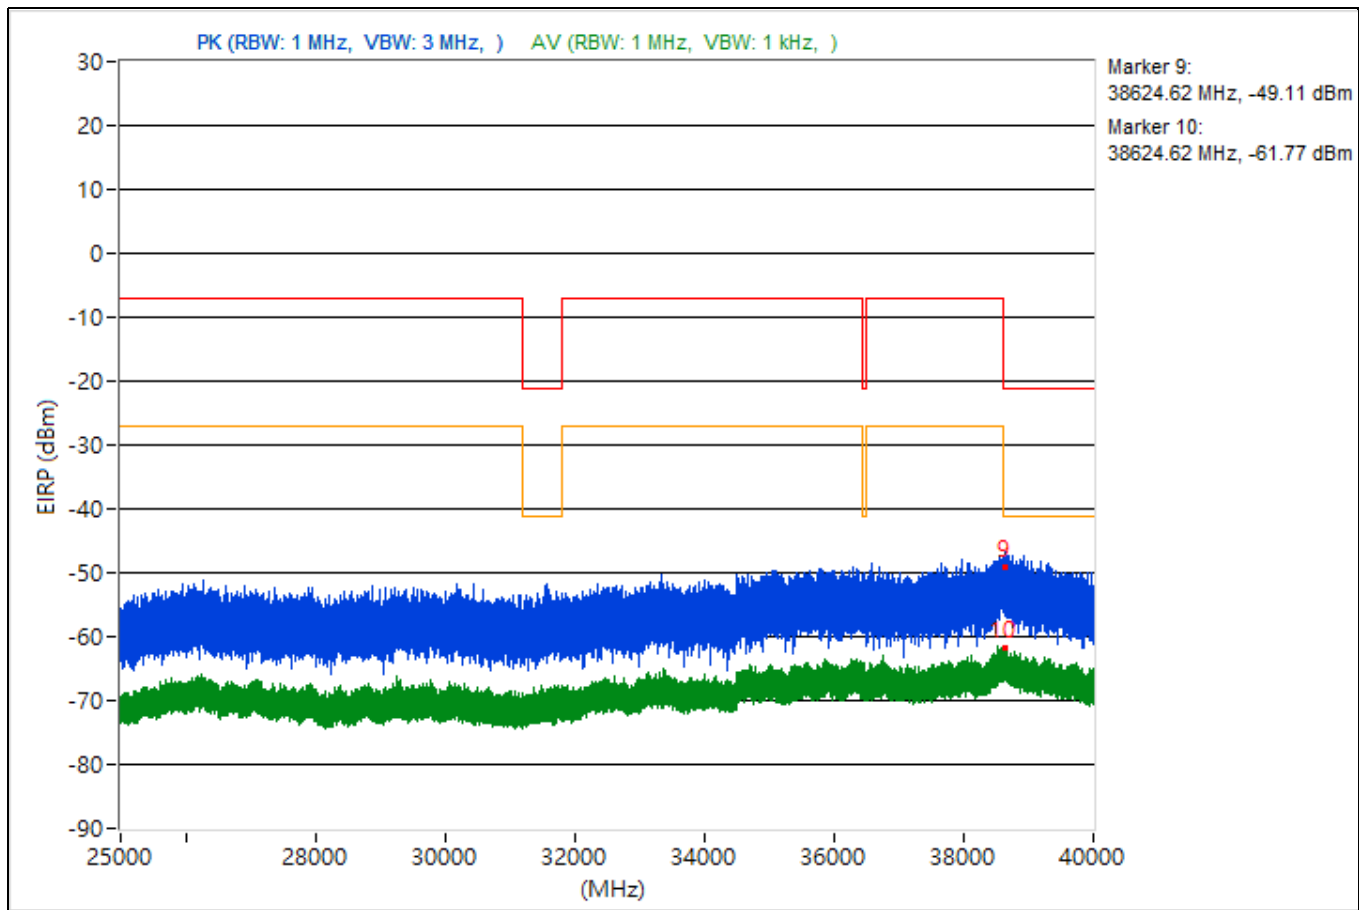


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.59	47.56 PK	74	-26.44	-52.62	4.92	-47.7
2	3811.59	35.89 AV	54	-18.11	-64.29	4.92	-59.37
3	15352.89	45 PK	74	-29	-55.18	4.92	-50.26
4	15352.89	34.58 AV	54	-19.42	-65.6	4.92	-60.68
5	20004.7	45.5 PK	74	-28.5	-54.68	4.92	-49.76
6	20004.7	36.08 AV	54	-17.92	-64.1	4.92	-59.18
7	23944.5	45.13 PK	74	-28.87	-55.05	4.92	-50.13
8	23944.5	36.97 AV	54	-17.03	-63.21	4.92	-58.29
9	38650.93	42.43 PK	74	-31.57	-57.75	4.92	-52.83
10	38650.93	34.16 AV	54	-19.84	-66.02	4.92	-61.1

Note: Margin value = Emission Level - Limit value

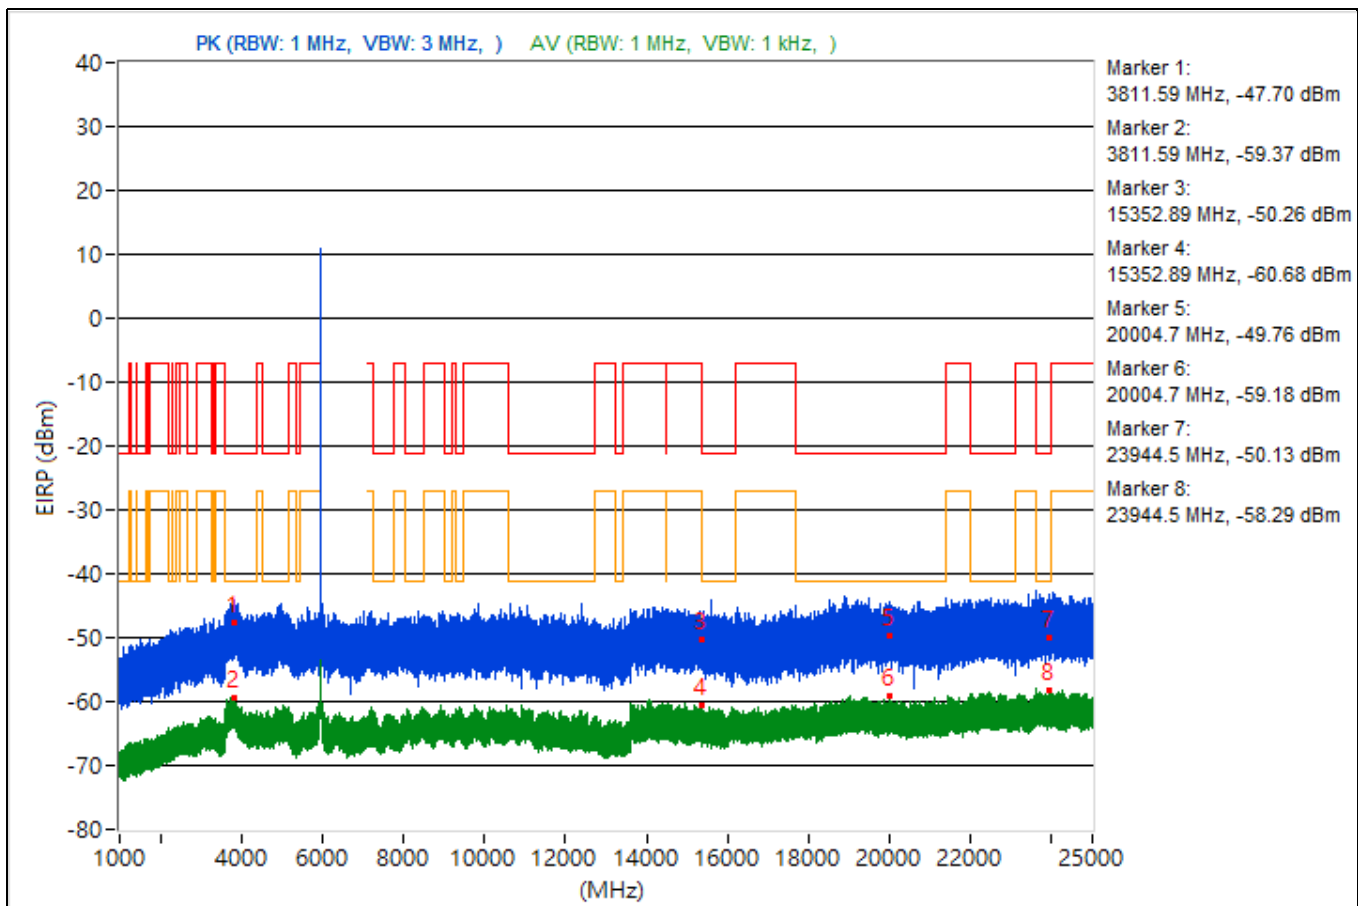


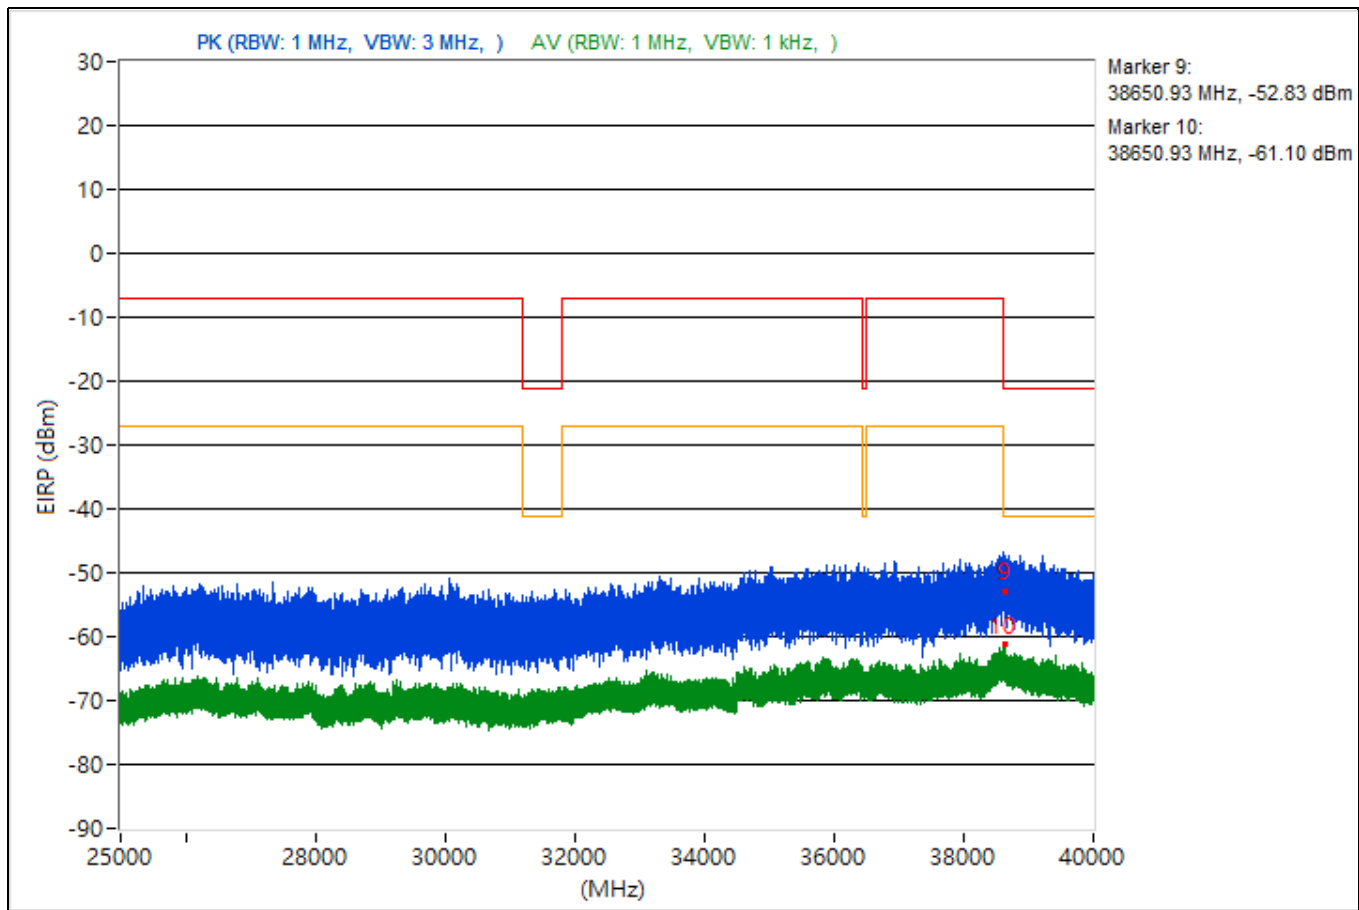


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.53	47.86 PK	74	-26.14	-52.32	4.92	-47.4
2	3806.53	35.87 AV	54	-18.13	-64.31	4.92	-59.39
3	8465.51	46.95 PK	74	-27.05	-53.23	4.92	-48.31
4	8465.51	35.17 AV	54	-18.83	-65.01	4.92	-60.09
5	19416.5	44.12 PK	74	-29.88	-56.06	4.92	-51.14
6	19416.5	36.97 AV	54	-17.03	-63.21	4.92	-58.29
7	22755.4	43.69 PK	74	-30.31	-56.49	4.92	-51.57
8	22755.4	37.43 AV	54	-16.57	-62.75	4.92	-57.83
9	38737.78	44.86 PK	74	-29.14	-55.32	4.92	-50.4
10	38737.78	33.85 AV	54	-20.15	-66.33	4.92	-61.41

Note: Margin value = Emission Level - Limit value

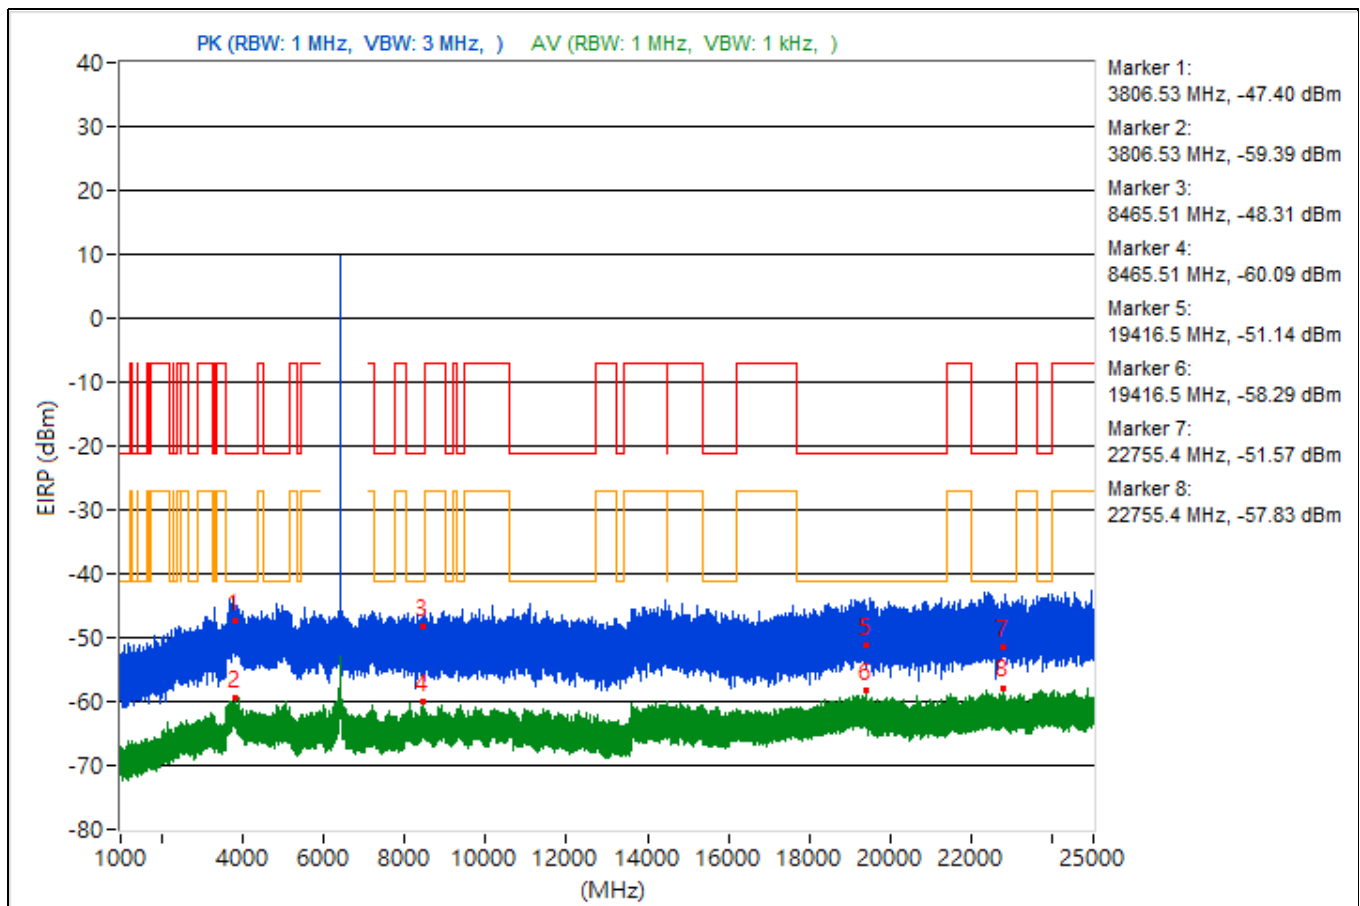


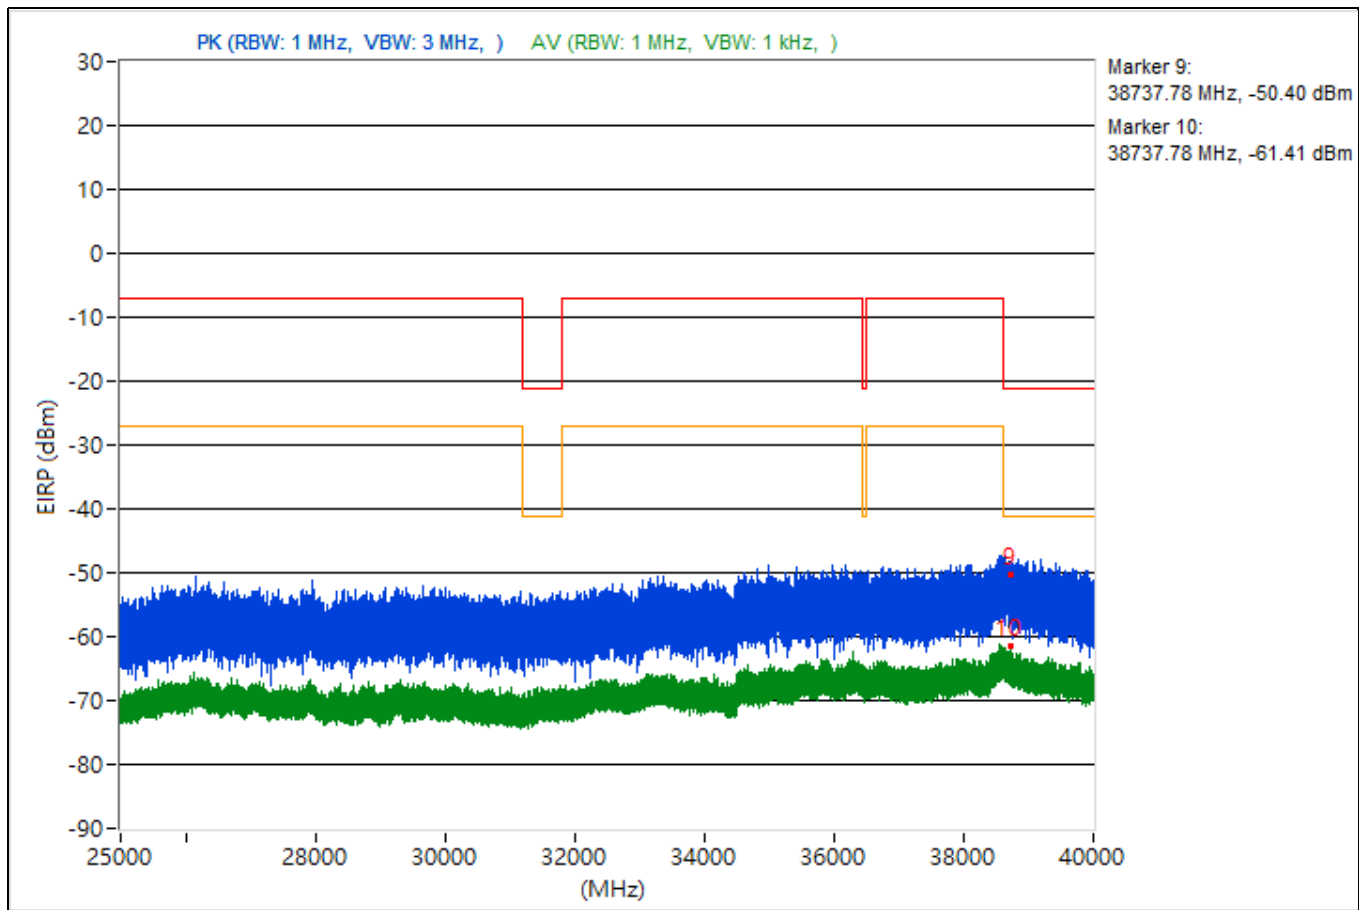


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.74	42.27 PK	74	-31.73	-57.91	4.92	-52.99
2	3832.74	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	9418.4	43.2 PK	74	-30.8	-56.98	4.92	-52.06
4	9418.4	34.55 AV	54	-19.45	-65.63	4.92	-60.71
5	19204.3	46.21 PK	74	-27.79	-53.97	4.92	-49.05
6	19204.3	36.48 AV	54	-17.52	-63.7	4.92	-58.78
7	22750.9	47.49 PK	74	-26.51	-52.69	4.92	-47.77
8	22750.9	37.56 AV	54	-16.44	-62.62	4.92	-57.7
9	38626.84	43.8 PK	74	-30.2	-56.38	4.92	-51.46
10	38626.84	34.32 AV	54	-19.68	-65.86	4.92	-60.94

Note: Margin value = Emission Level - Limit value

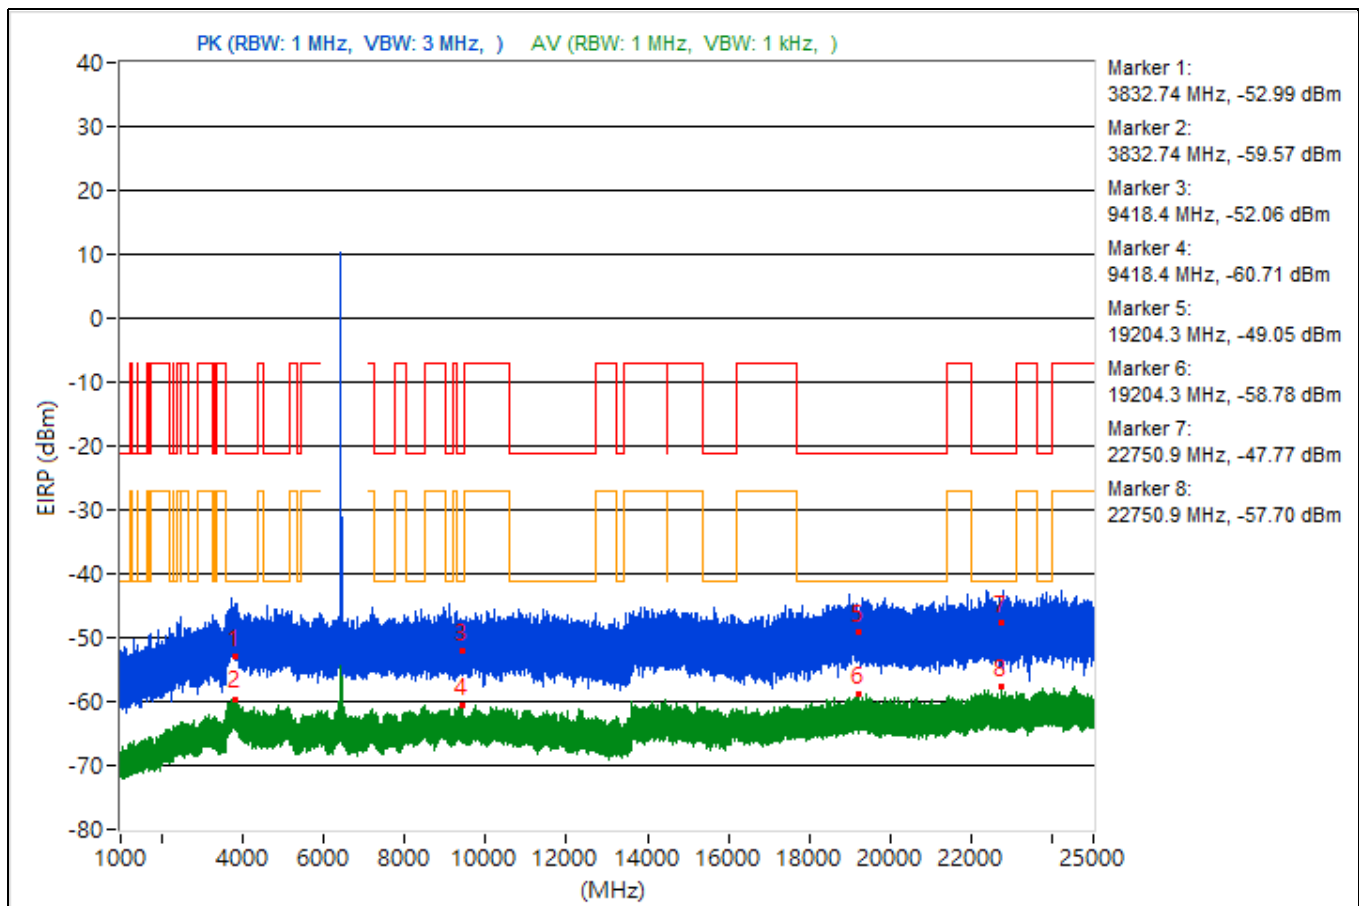


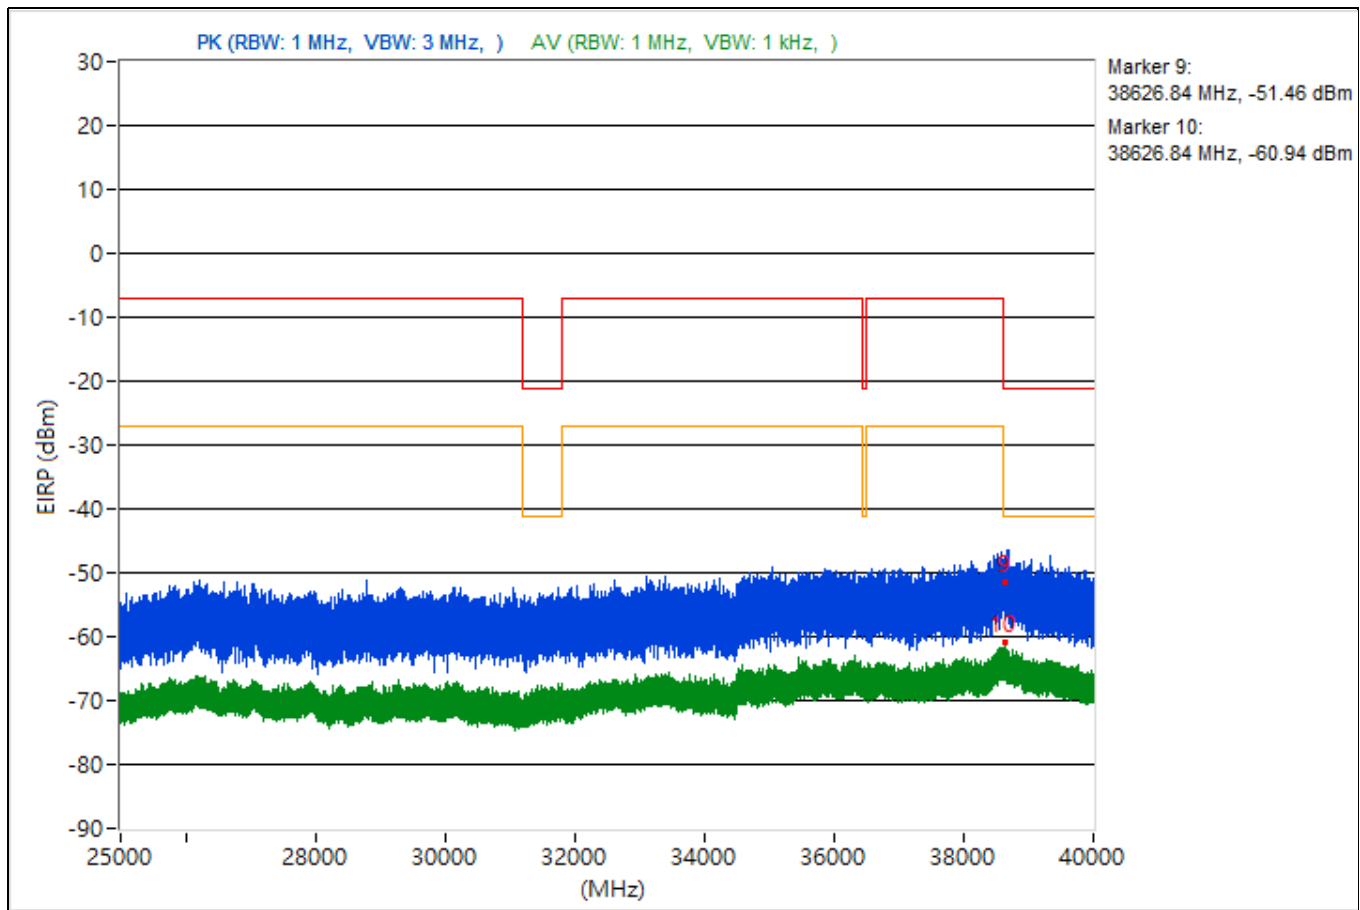


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.89	48.88 PK	74	-25.12	-51.3	4.92	-46.38
2	3796.89	35.46 AV	54	-18.54	-64.72	4.92	-59.8
3	15389.87	47.12 PK	74	-26.88	-53.06	4.92	-48.14
4	15389.87	34.39 AV	54	-19.61	-65.79	4.92	-60.87
5	19203.7	45.1 PK	74	-28.9	-55.08	4.92	-50.16
6	19203.7	36.09 AV	54	-17.91	-64.09	4.92	-59.17
7	23668.9	45.53 PK	74	-28.47	-54.65	4.92	-49.73
8	23668.9	37.4 AV	54	-16.6	-62.78	4.92	-57.86
9	38609.78	42.07 PK	74	-31.93	-58.11	4.92	-53.19
10	38609.78	33.64 AV	54	-20.36	-66.54	4.92	-61.62

Note: Margin value = Emission Level - Limit value

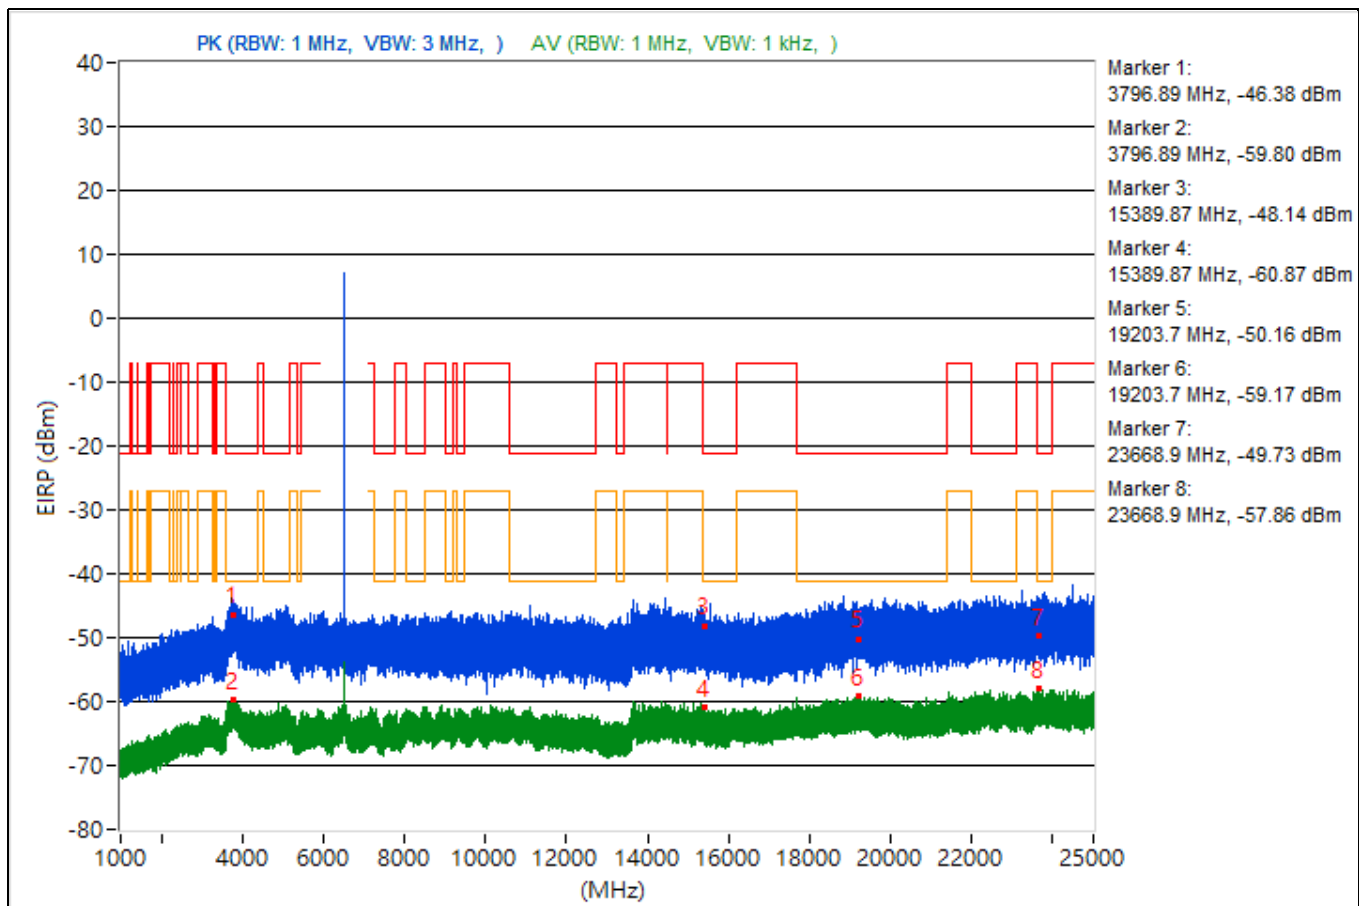

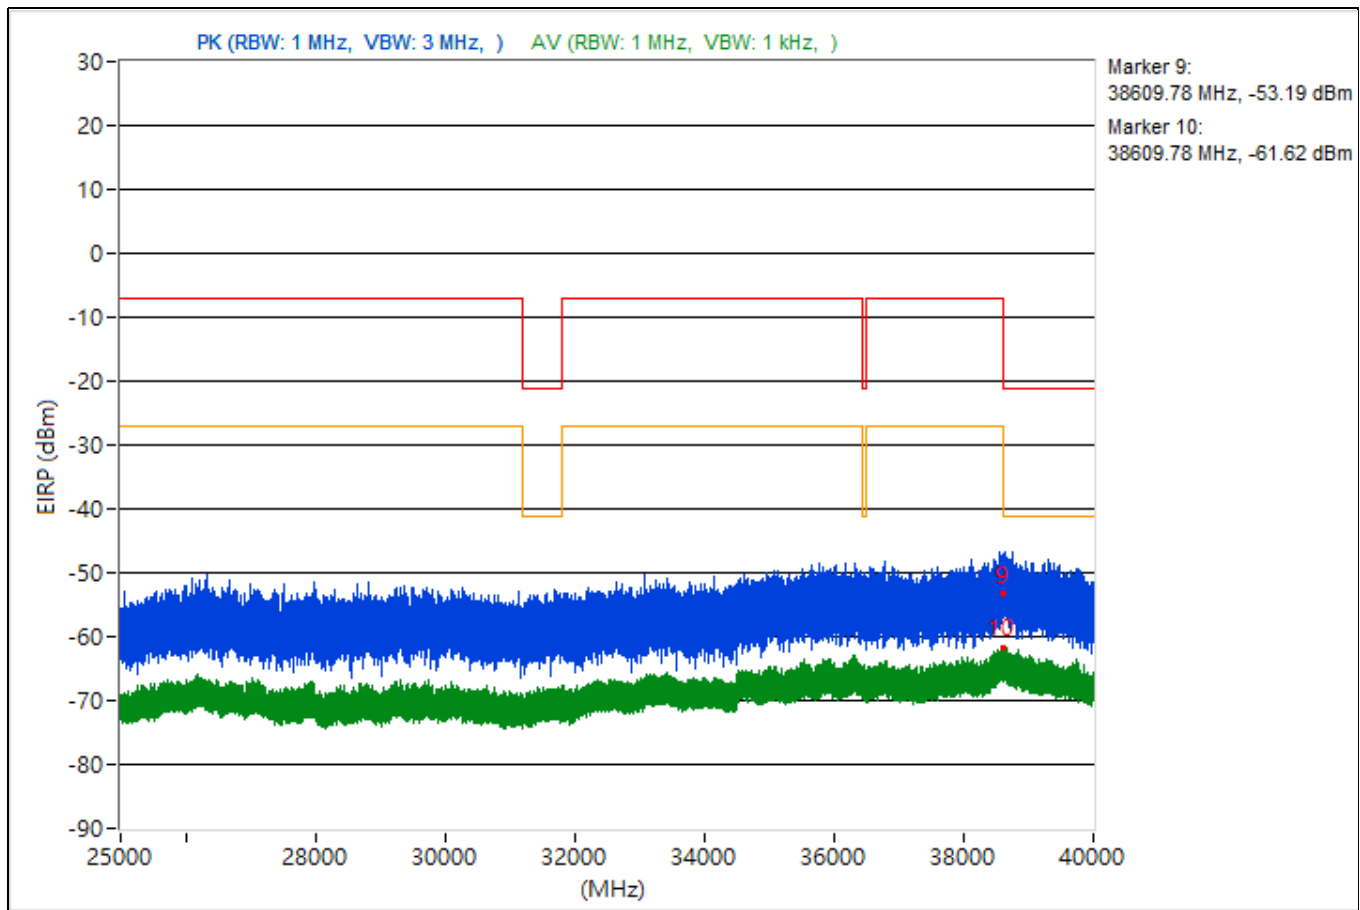

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3872.8	45.9 PK	74	-28.1	-54.28	4.92	-49.36
2	3872.8	35.82 AV	54	-18.18	-64.36	4.92	-59.44
3	8449.16	43.21 PK	74	-30.79	-56.97	4.92	-52.05
4	8449.16	34.98 AV	54	-19.02	-65.2	4.92	-60.28
5	19140.9	46.65 PK	74	-27.35	-53.53	4.92	-48.61
6	19140.9	36.67 AV	54	-17.33	-63.51	4.92	-58.59
7	22464.3	44.12 PK	74	-29.88	-56.06	4.92	-51.14
8	22464.3	37.73 AV	54	-16.27	-62.45	4.92	-57.53
9	38622.93	43.59 PK	74	-30.41	-56.59	4.92	-51.67
10	38622.93	33.73 AV	54	-20.27	-66.45	4.92	-61.53

Note: Margin value = Emission Level - Limit value

