



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.44	46.81 PK	74	-27.19	-53.37	4.92	-48.45
2	3756.44	35.75 AV	54	-18.25	-64.43	4.92	-59.51
3	14489.87	47.81 PK	74	-26.19	-52.37	4.92	-47.45
4	14489.87	35.24 AV	54	-18.76	-64.94	4.92	-60.02
5	19487.5	44.82 PK	74	-29.18	-55.36	4.92	-50.44
6	19487.5	36.65 AV	54	-17.35	-63.53	4.92	-58.61
7	23622.9	47.39 PK	74	-26.61	-52.79	4.92	-47.87
8	23622.9	37.15 AV	54	-16.85	-63.03	4.92	-58.11
9	38668.36	43.68 PK	74	-30.32	-56.5	4.92	-51.58
10	38668.36	33.69 AV	54	-20.31	-66.49	4.92	-61.57

Note: Margin value = Emission Level - Limit value

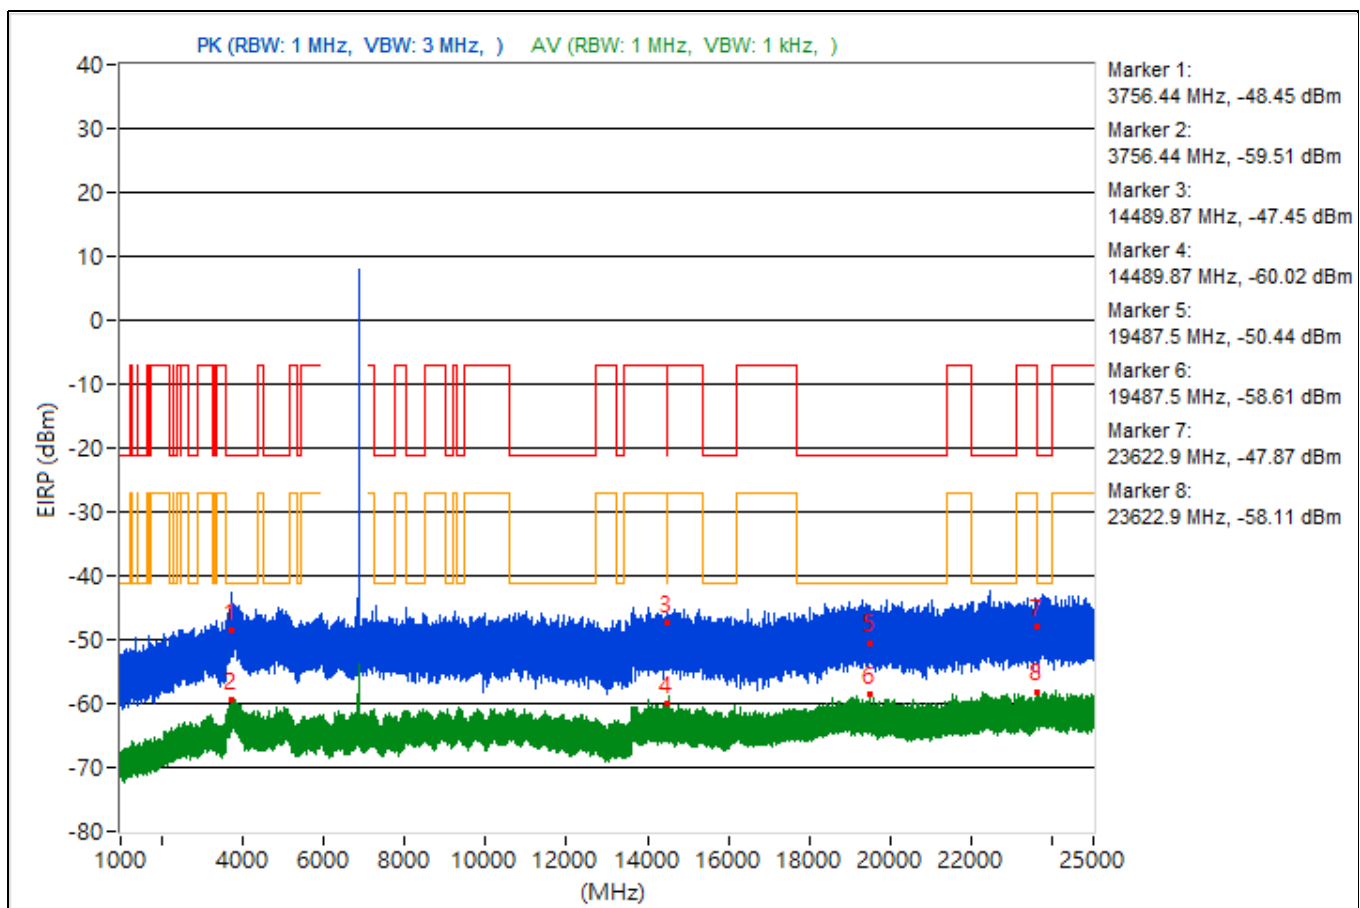


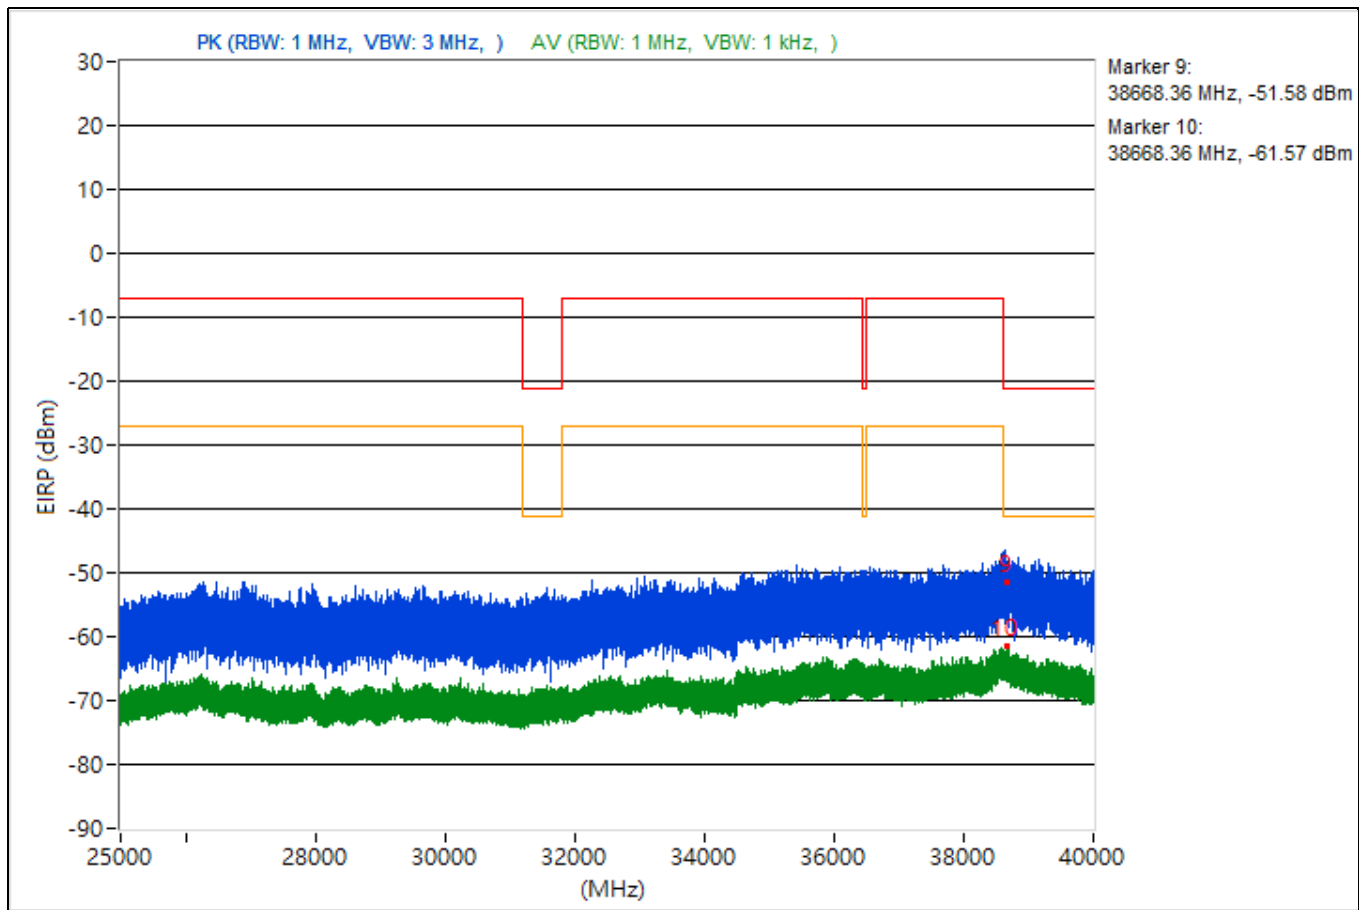


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.8	48.79 PK	74	-25.21	-51.39	4.92	-46.47
2	3809.8	36.25 AV	54	-17.75	-63.93	4.92	-59.01
3	14496.8	47.24 PK	74	-26.76	-52.94	4.92	-48.02
4	14496.8	34.71 AV	54	-19.29	-65.47	4.92	-60.55
5	19481.9	44.83 PK	74	-29.17	-55.35	4.92	-50.43
6	19481.9	36.38 AV	54	-17.62	-63.8	4.92	-58.88
7	22364.9	45.28 PK	74	-28.72	-54.9	4.92	-49.98
8	22364.9	36.99 AV	54	-17.01	-63.19	4.92	-58.27
9	38635.2	42.4 PK	74	-31.6	-57.78	4.92	-52.86
10	38635.2	33.48 AV	54	-20.52	-66.7	4.92	-61.78

Note: Margin value = Emission Level - Limit value

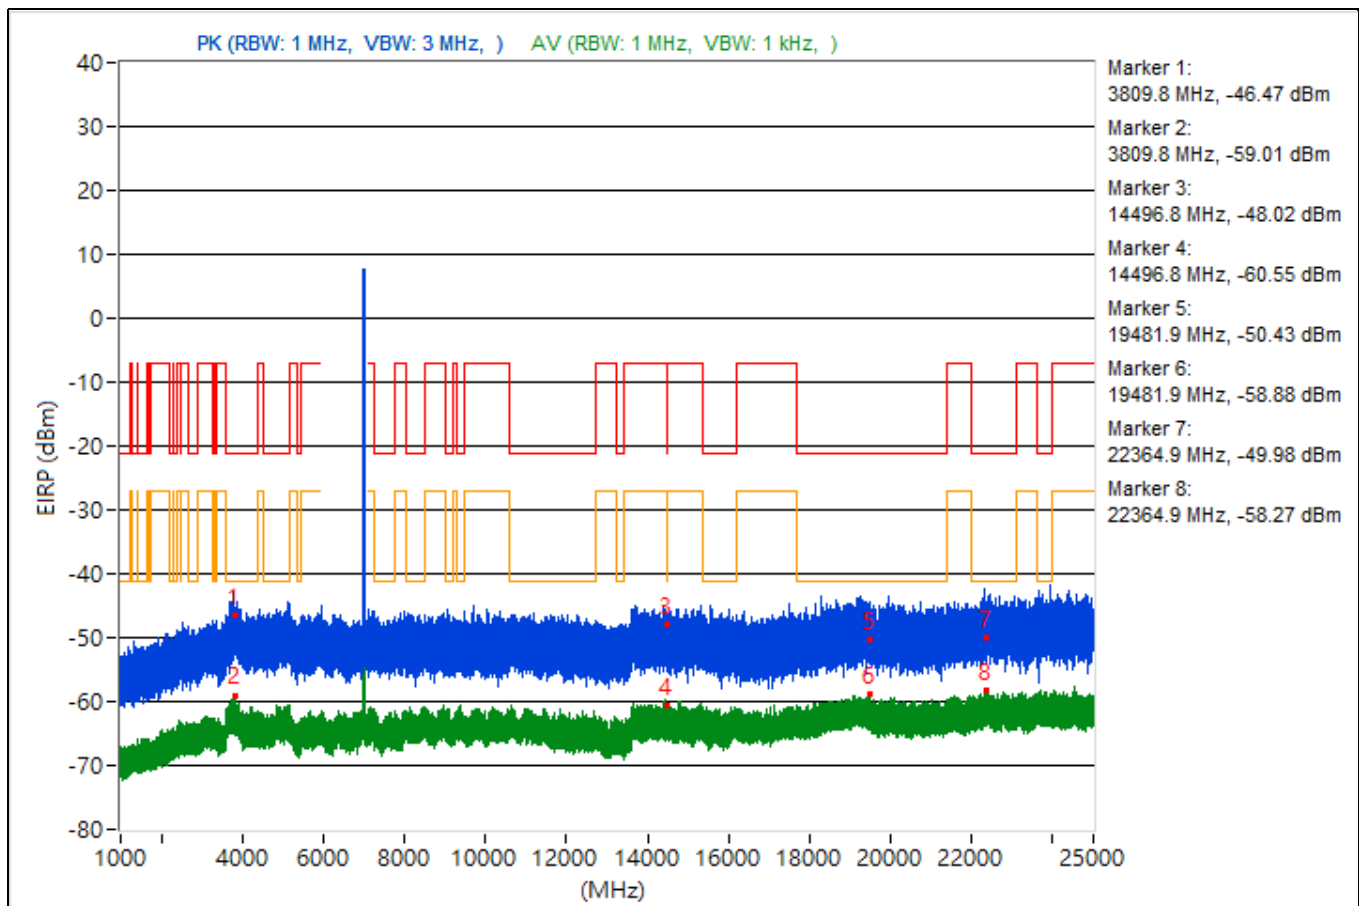


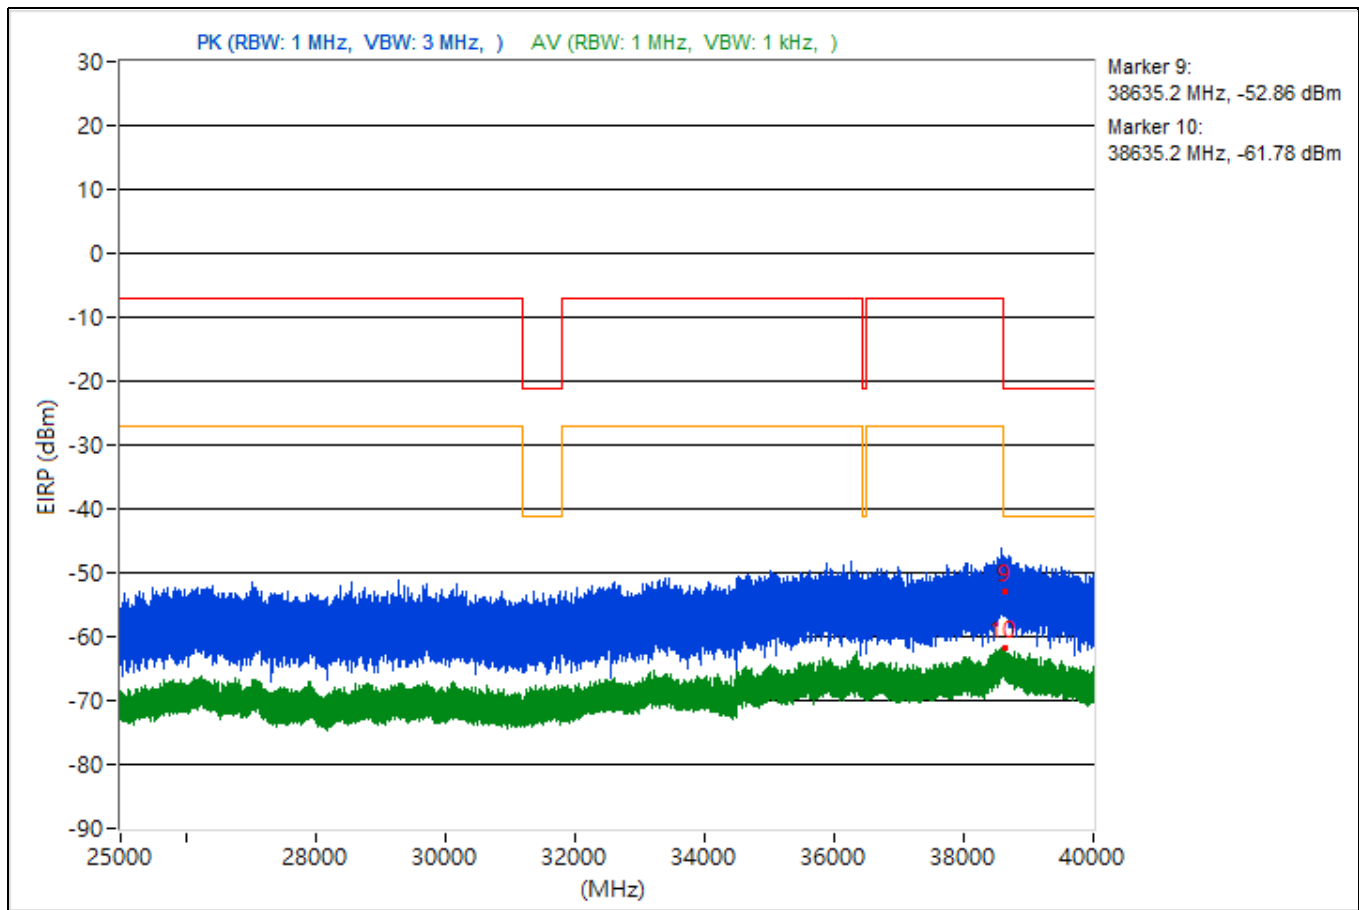


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3678.51	44.91 PK	74	-29.09	-55.27	4.92	-50.35
2	3678.51	35.88 AV	54	-18.12	-64.3	4.92	-59.38
3	14486.04	41.38 PK	74	-32.62	-58.8	4.92	-53.88
4	14486.04	35.08 AV	54	-18.92	-65.1	4.92	-60.18
5	19159.2	45.43 PK	74	-28.57	-54.75	4.92	-49.83
6	19159.2	36.57 AV	54	-17.43	-63.61	4.92	-58.69
7	22428.4	47.08 PK	74	-26.92	-53.1	4.92	-48.18
8	22428.4	37.58 AV	54	-16.42	-62.6	4.92	-57.68
9	38629.07	41.84 PK	74	-32.16	-58.34	4.92	-53.42
10	38629.07	33.55 AV	54	-20.45	-66.63	4.92	-61.71

Note: Margin value = Emission Level - Limit value

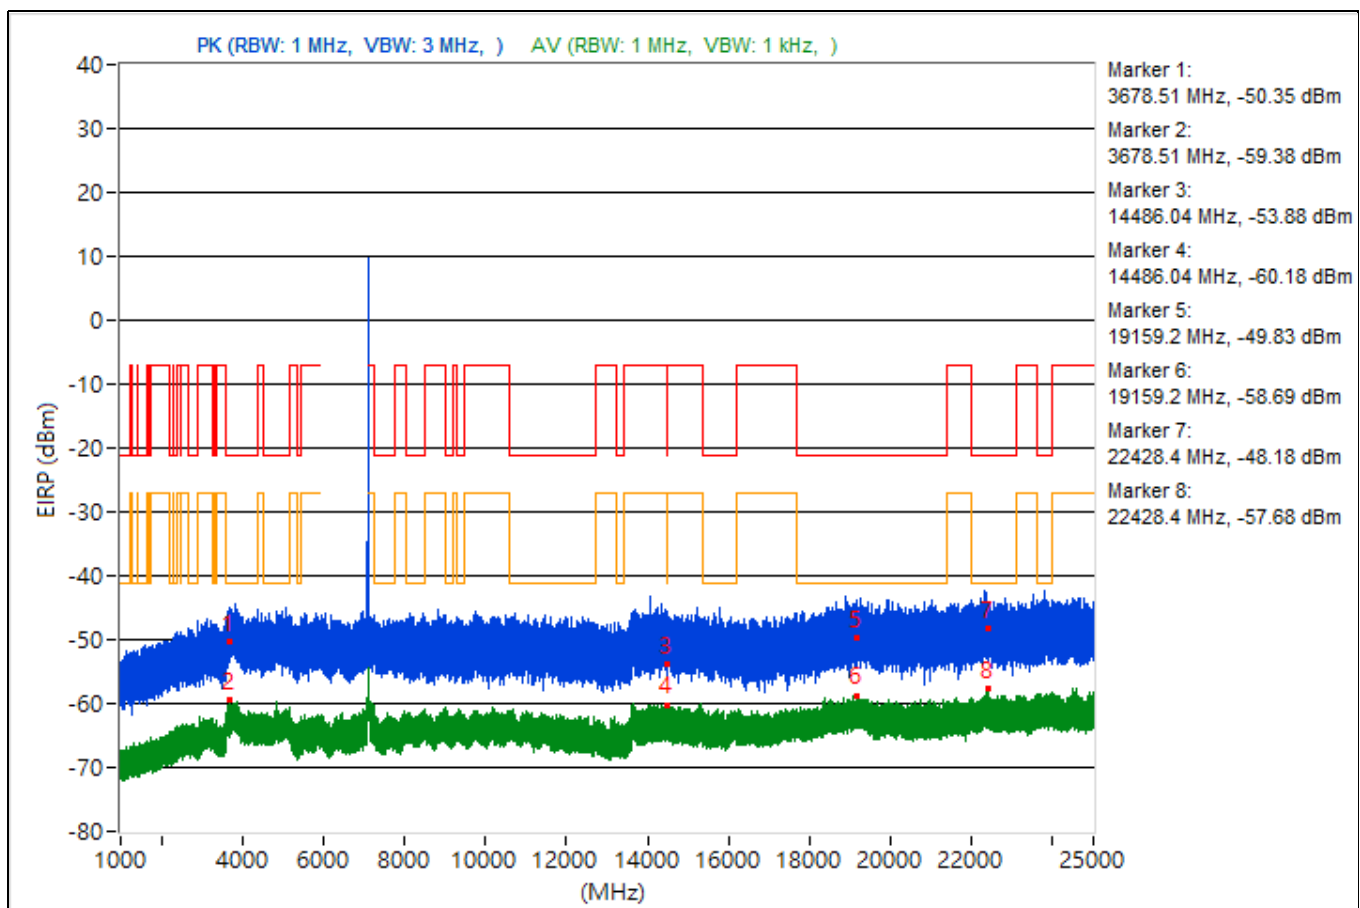


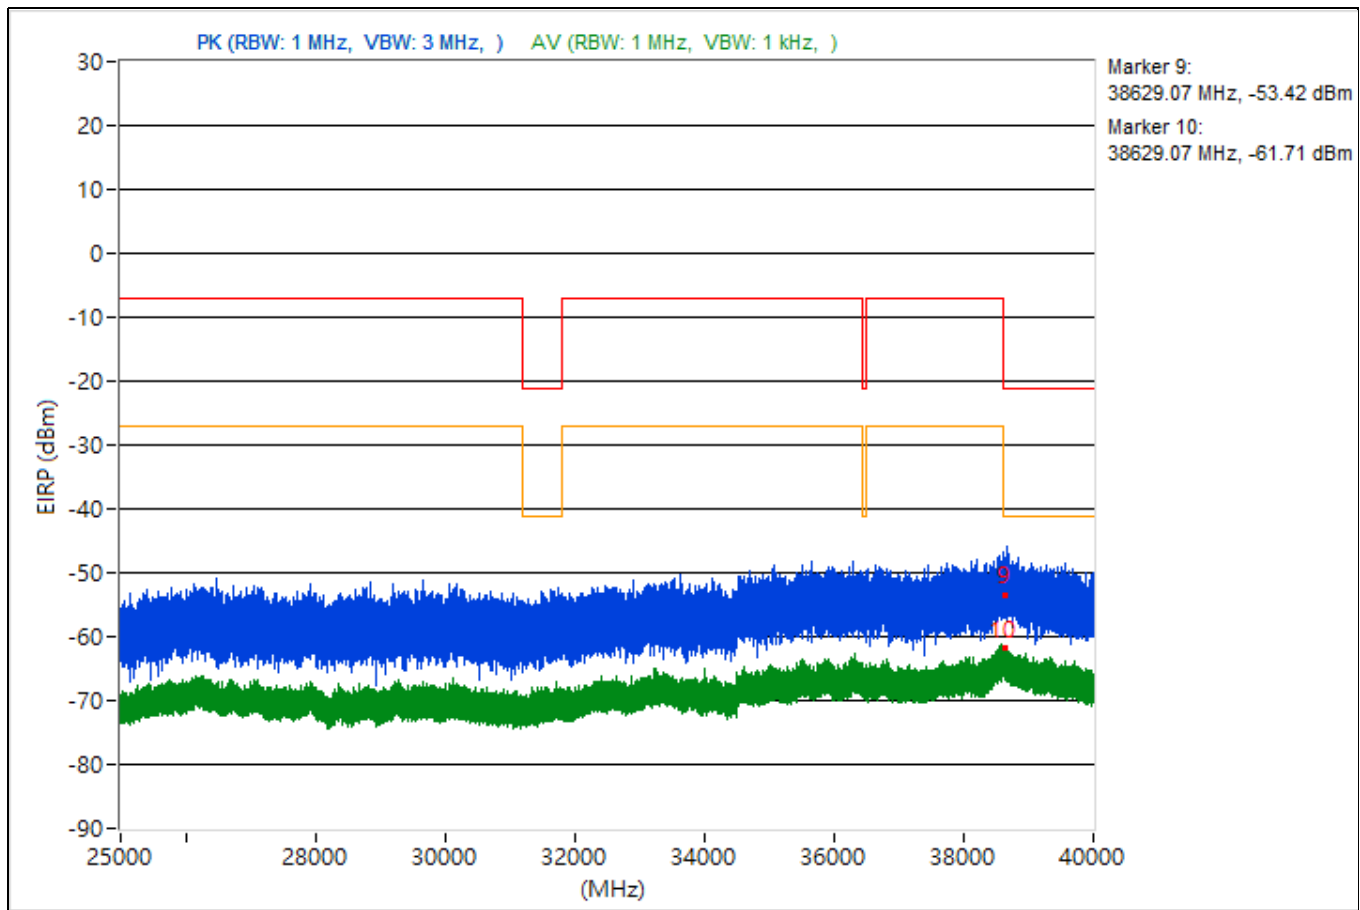


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.01	49.84 PK	74	-24.16	-50.34	4.92	-45.42
2	3822.01	35.91 AV	54	-18.09	-64.27	4.92	-59.35
3	15451.56	44.58 PK	74	-29.42	-55.6	4.92	-50.68
4	15451.56	34.7 AV	54	-19.3	-65.48	4.92	-60.56
5	19303.8	44.24 PK	74	-29.76	-55.94	4.92	-51.02
6	19303.8	36.58 AV	54	-17.42	-63.6	4.92	-58.68
7	23776.7	44.5 PK	74	-29.5	-55.68	4.92	-50.76
8	23776.7	37.91 AV	54	-16.09	-62.27	4.92	-57.35
9	38651.82	43.7 PK	74	-30.3	-56.48	4.92	-51.56
10	38651.82	34.16 AV	54	-19.84	-66.02	4.92	-61.1

Note: Margin value = Emission Level - Limit value

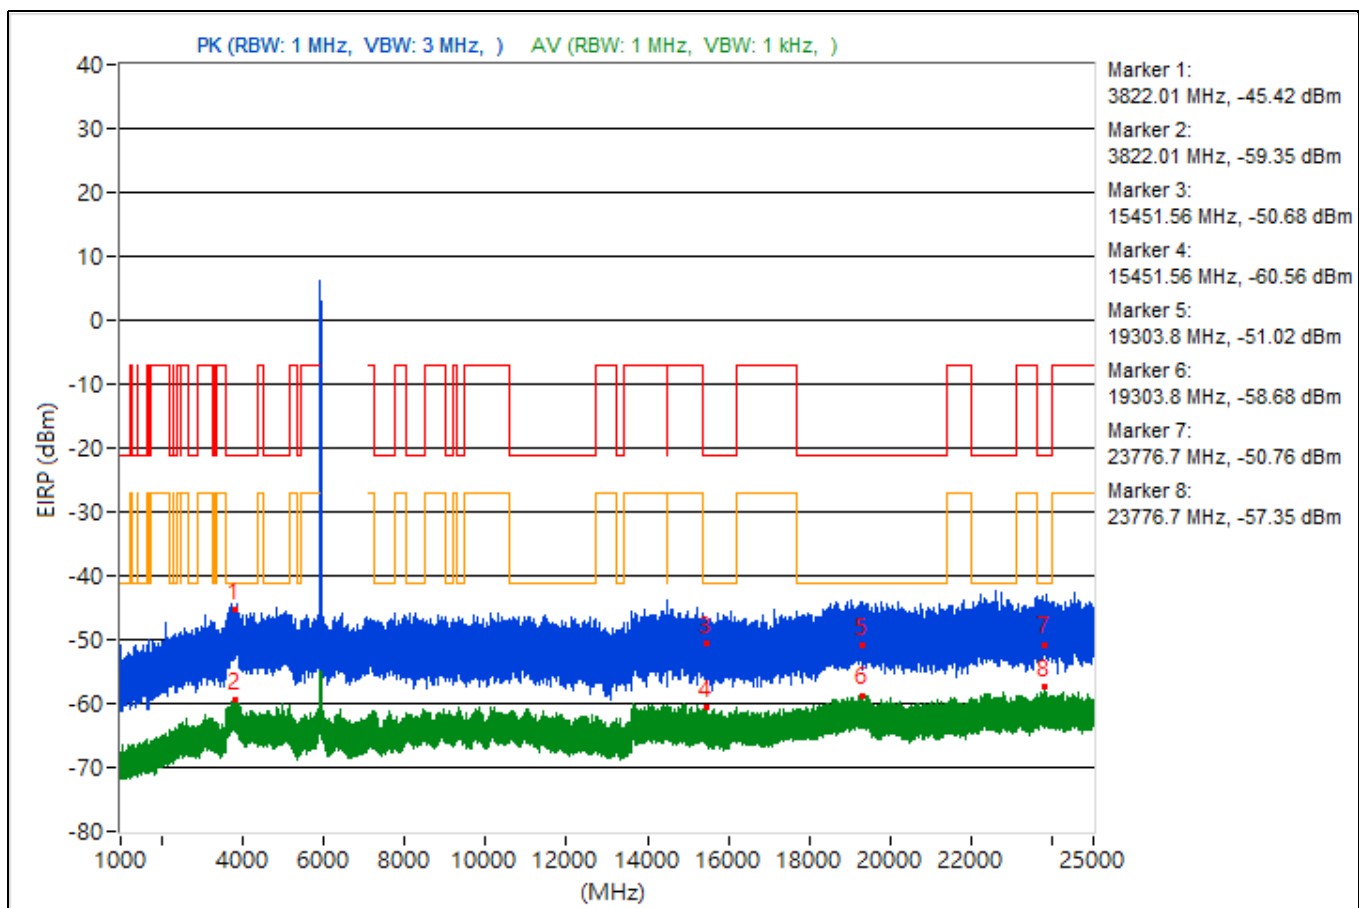


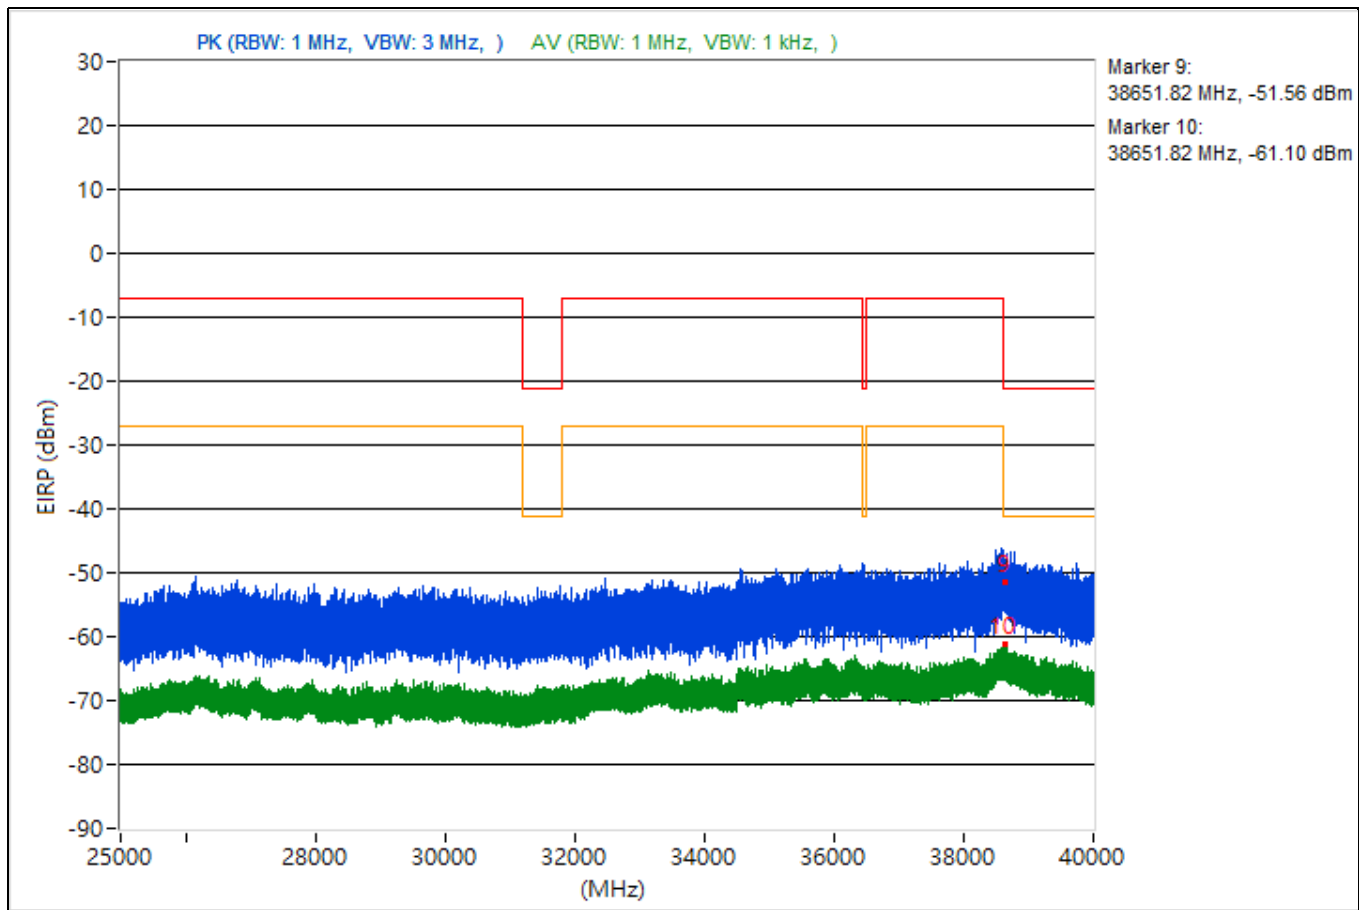


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3741.74	48.84 PK	74	-25.16	-51.34	4.92	-46.42
2	3741.74	36.09 AV	54	-17.91	-64.09	4.92	-59.17
3	14473.78	45.82 PK	74	-28.18	-54.36	4.92	-49.44
4	14473.78	34.74 AV	54	-19.26	-65.44	4.92	-60.52
5	19209.1	44.53 PK	74	-29.47	-55.65	4.92	-50.73
6	19209.1	37.01 AV	54	-16.99	-63.17	4.92	-58.25
7	23606.6	47.9 PK	74	-26.1	-52.28	4.92	-47.36
8	23606.6	37.3 AV	54	-16.7	-62.88	4.92	-57.96
9	38634.58	44.73 PK	74	-29.27	-55.45	4.92	-50.53
10	38634.58	33.41 AV	54	-20.59	-66.77	4.92	-61.85

Note: Margin value = Emission Level - Limit value

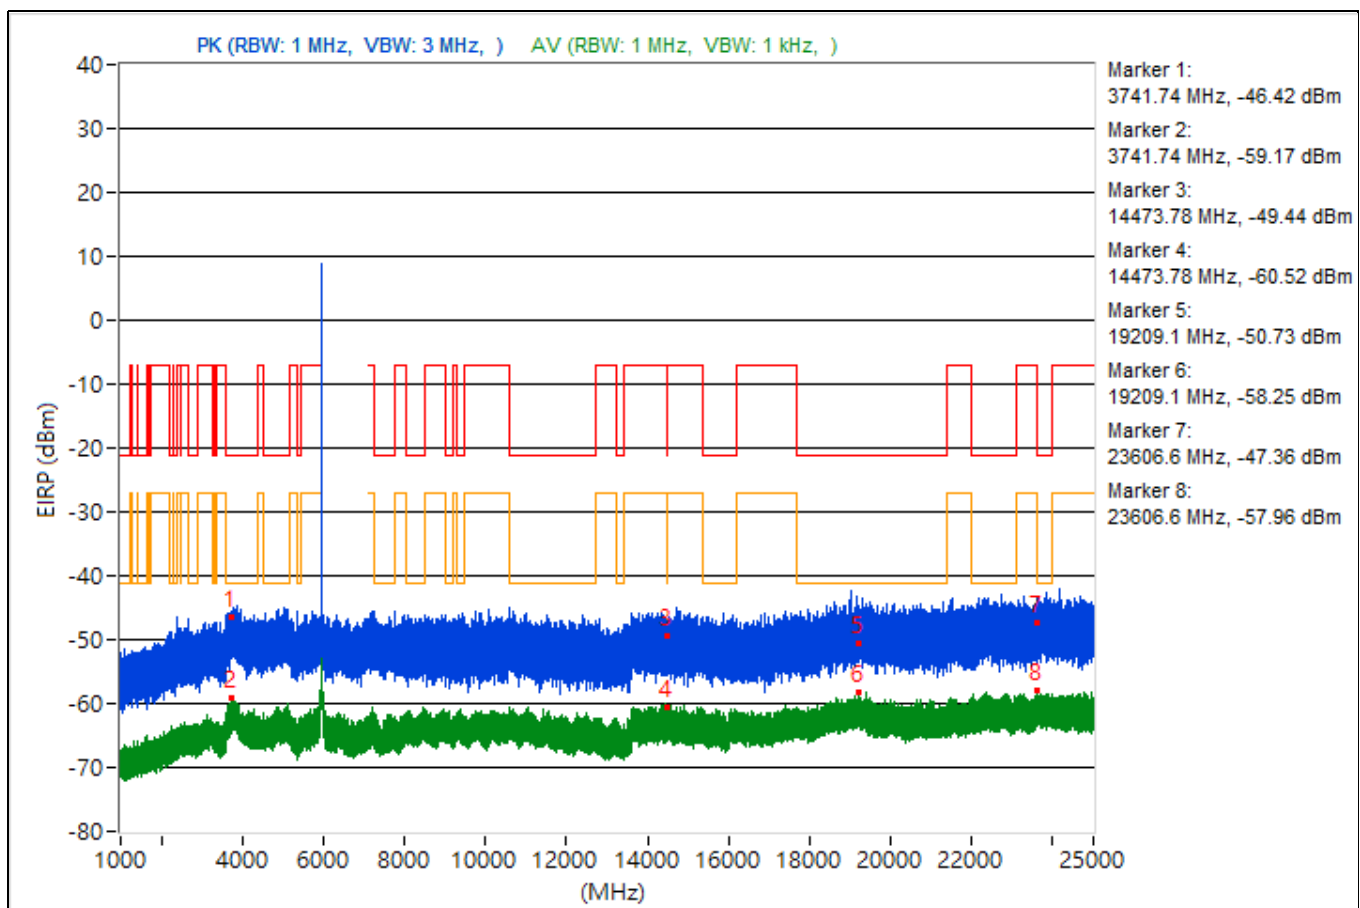


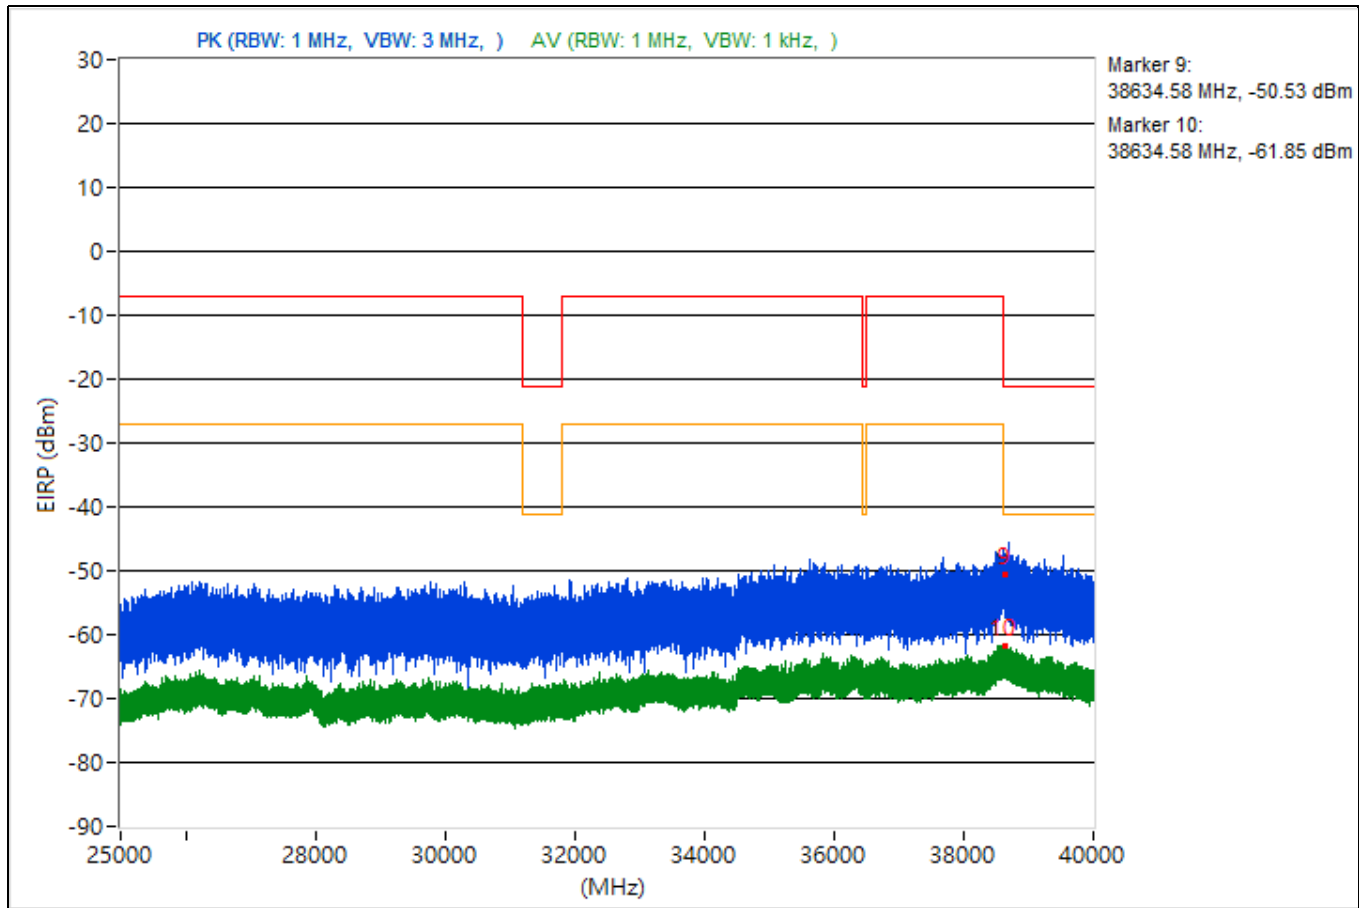


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.96	48.47 PK	74	-25.53	-51.71	4.92	-46.79
2	3809.96	36.09 AV	54	-17.91	-64.09	4.92	-59.17
3	14478.31	48.25 PK	74	-25.75	-51.93	4.92	-47.01
4	14478.31	34.7 AV	54	-19.3	-65.48	4.92	-60.56
5	19462.3	45.32 PK	74	-28.68	-54.86	4.92	-49.94
6	19462.3	36.27 AV	54	-17.73	-63.91	4.92	-58.99
7	23804.5	46.36 PK	74	-27.64	-53.82	4.92	-48.9
8	23804.5	37.86 AV	54	-16.14	-62.32	4.92	-57.4
9	38657.07	40.89 PK	74	-33.11	-59.29	4.92	-54.37
10	38657.07	33.96 AV	54	-20.04	-66.22	4.92	-61.3

Note: Margin value = Emission Level - Limit value

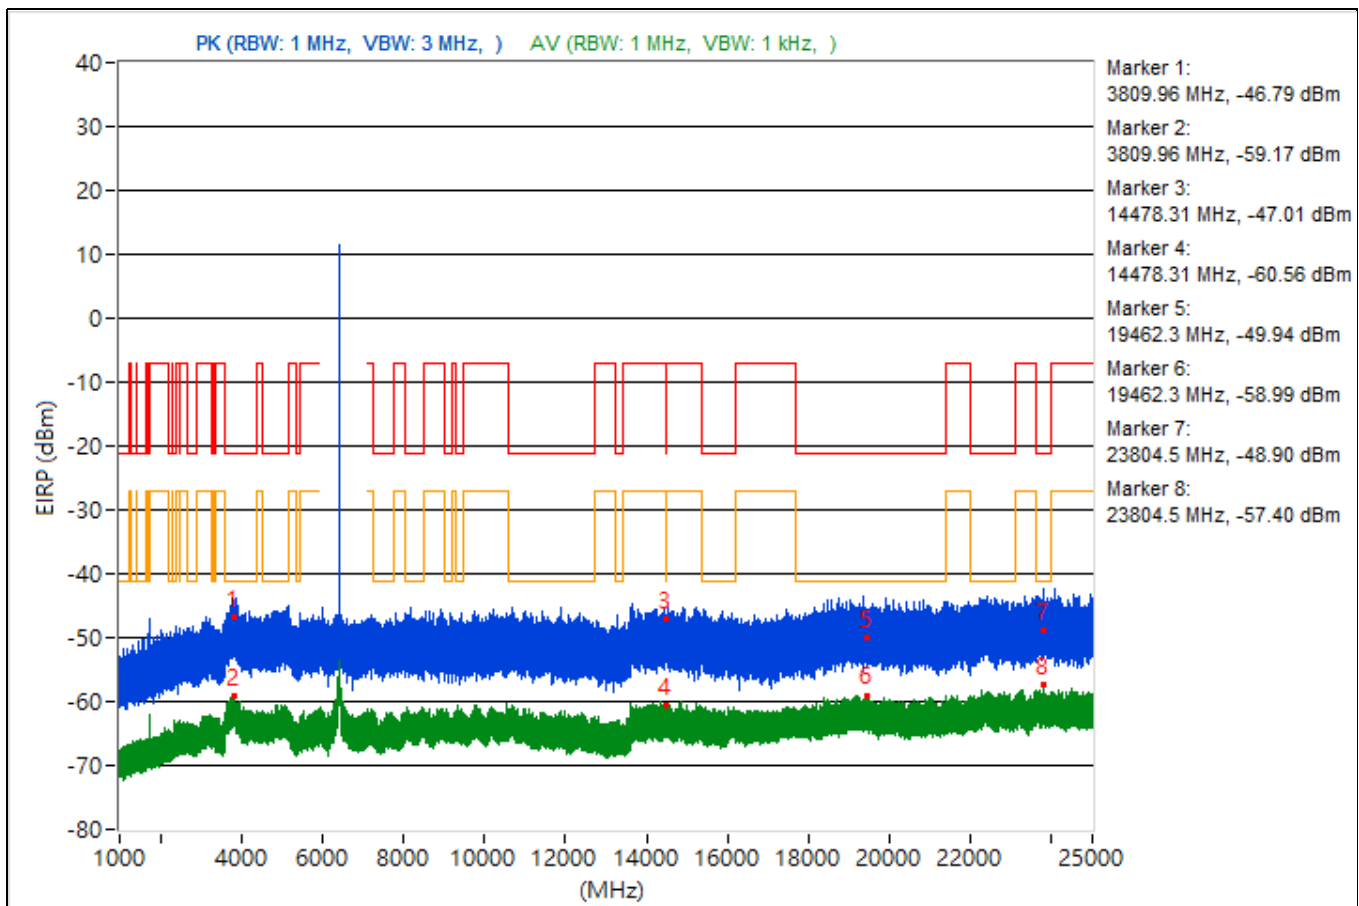


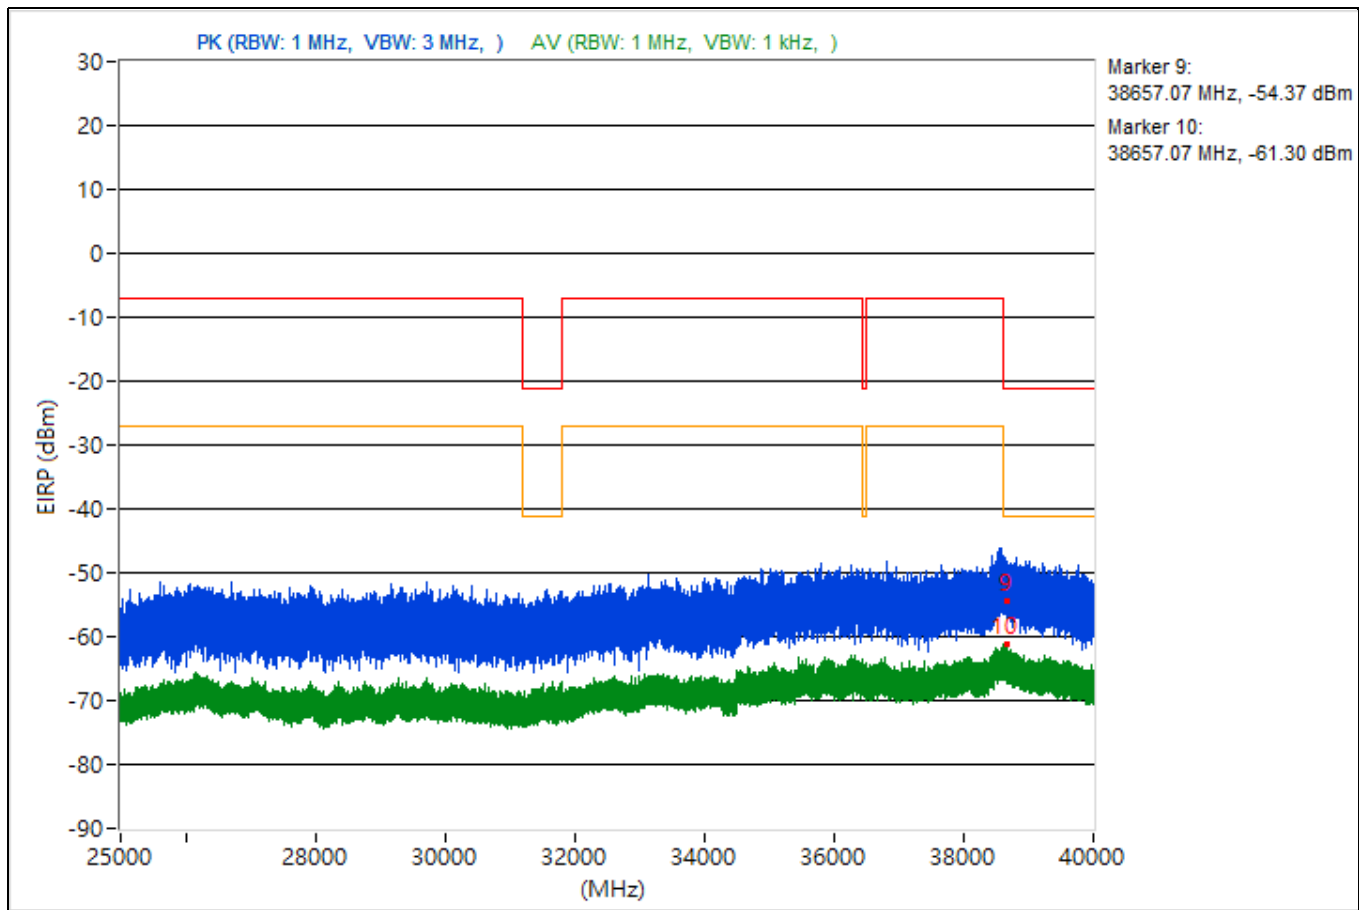


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.88	44.94 PK	74	-29.06	-55.24	4.92	-50.32
2	3802.88	35.58 AV	54	-18.42	-64.6	4.92	-59.68
3	14473.51	45.44 PK	74	-28.56	-54.74	4.92	-49.82
4	14473.51	35.45 AV	54	-18.55	-64.73	4.92	-59.81
5	19940.6	45.87 PK	74	-28.13	-54.31	4.92	-49.39
6	19940.6	36.31 AV	54	-17.69	-63.87	4.92	-58.95
7	23610.2	44.56 PK	74	-29.44	-55.62	4.92	-50.7
8	23610.2	36.95 AV	54	-17.05	-63.23	4.92	-58.31
9	38634.4	43.83 PK	74	-30.17	-56.35	4.92	-51.43
10	38634.4	33.97 AV	54	-20.03	-66.21	4.92	-61.29

Note: Margin value = Emission Level - Limit value

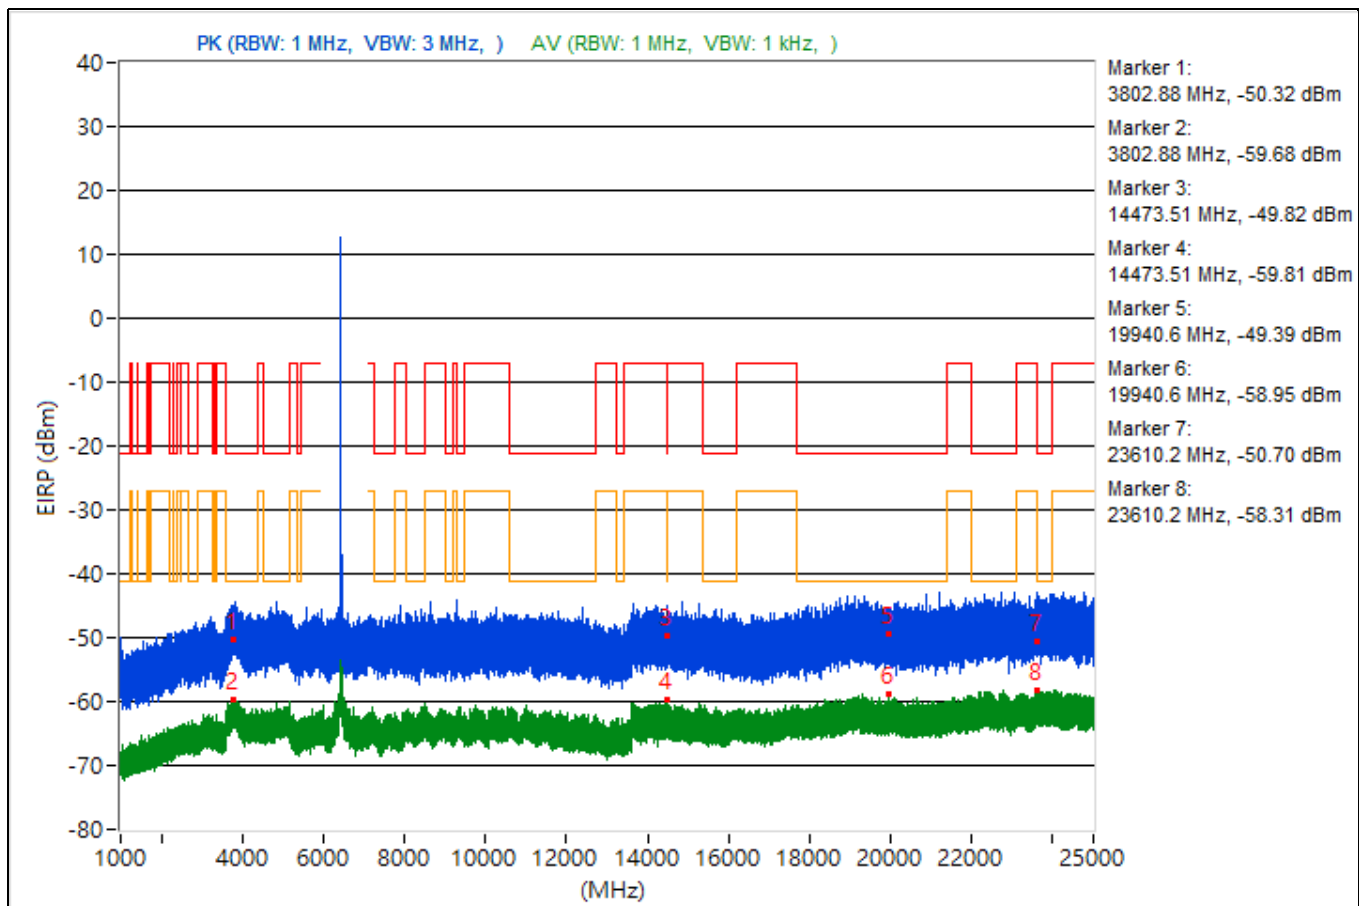


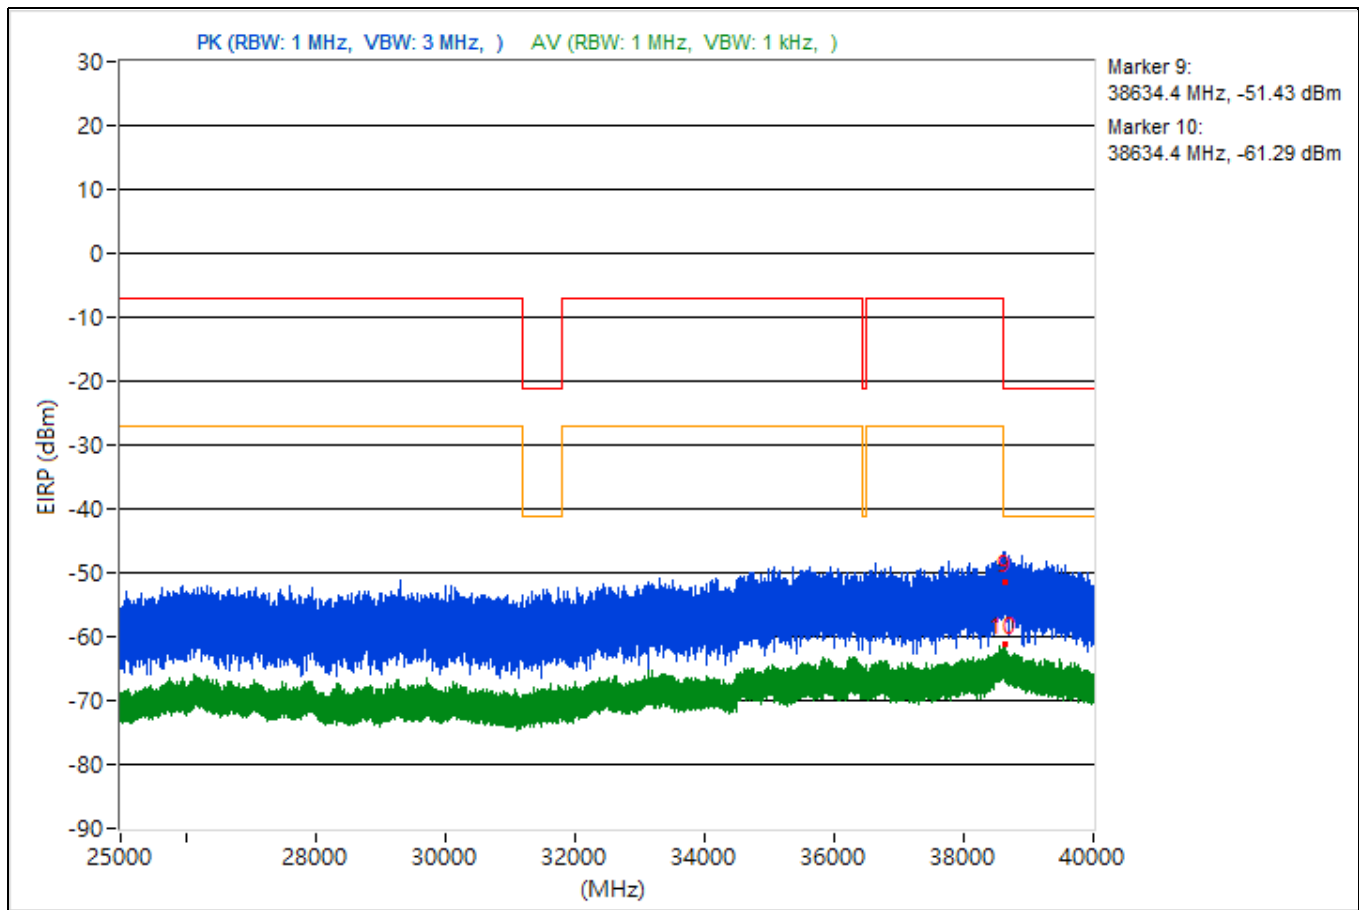


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.81	47.3 PK	74	-26.7	-52.88	4.92	-47.96
2	3810.81	36.27 AV	54	-17.73	-63.91	4.92	-58.99
3	14499.02	44.12 PK	74	-29.88	-56.06	4.92	-51.14
4	14499.02	35.31 AV	54	-18.69	-64.87	4.92	-59.95
5	20001.4	45.28 PK	74	-28.72	-54.9	4.92	-49.98
6	20001.4	36.67 AV	54	-17.33	-63.51	4.92	-58.59
7	23660.7	45.44 PK	74	-28.56	-54.74	4.92	-49.82
8	23660.7	37.42 AV	54	-16.58	-62.76	4.92	-57.84
9	38740.53	39.52 PK	74	-34.48	-60.66	4.92	-55.74
10	38740.53	33.64 AV	54	-20.36	-66.54	4.92	-61.62

Note: Margin value = Emission Level - Limit value

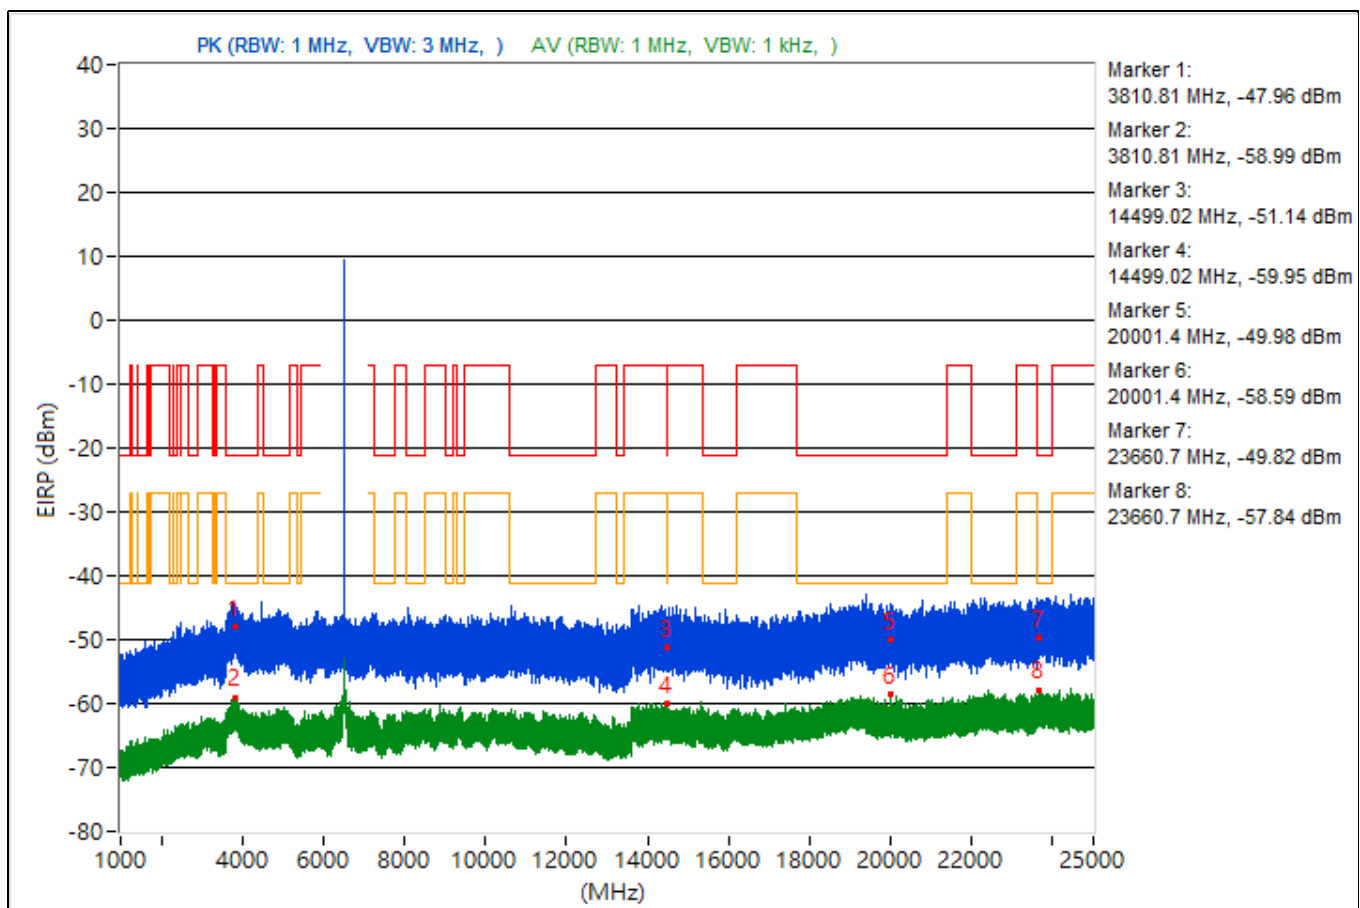


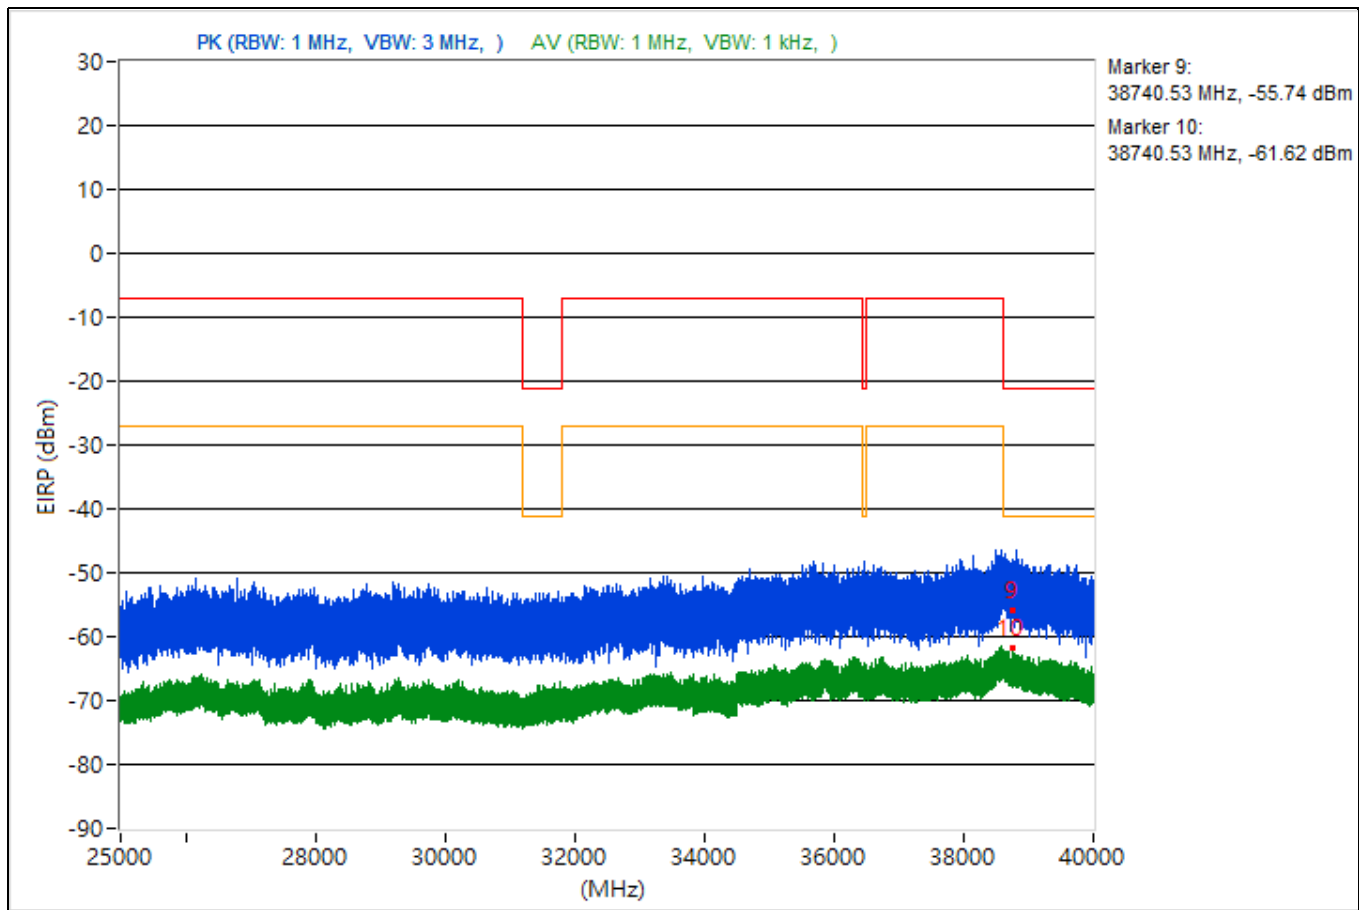


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.3	43.64 PK	74	-30.36	-56.54	4.92	-51.62
2	3785.3	35.98 AV	54	-18.02	-64.2	4.92	-59.28
3	14485.24	46.17 PK	74	-27.83	-54.01	4.92	-49.09
4	14485.24	35.28 AV	54	-18.72	-64.9	4.92	-59.98
5	19262.4	46.97 PK	74	-27.03	-53.21	4.92	-48.29
6	19262.4	36.5 AV	54	-17.5	-63.68	4.92	-58.76
7	23710	42.78 PK	74	-31.22	-57.4	4.92	-52.48
8	23710	37.19 AV	54	-16.81	-62.99	4.92	-58.07
9	38674.84	43.63 PK	74	-30.37	-56.55	4.92	-51.63
10	38674.84	33.96 AV	54	-20.04	-66.22	4.92	-61.3

Note: Margin value = Emission Level - Limit value

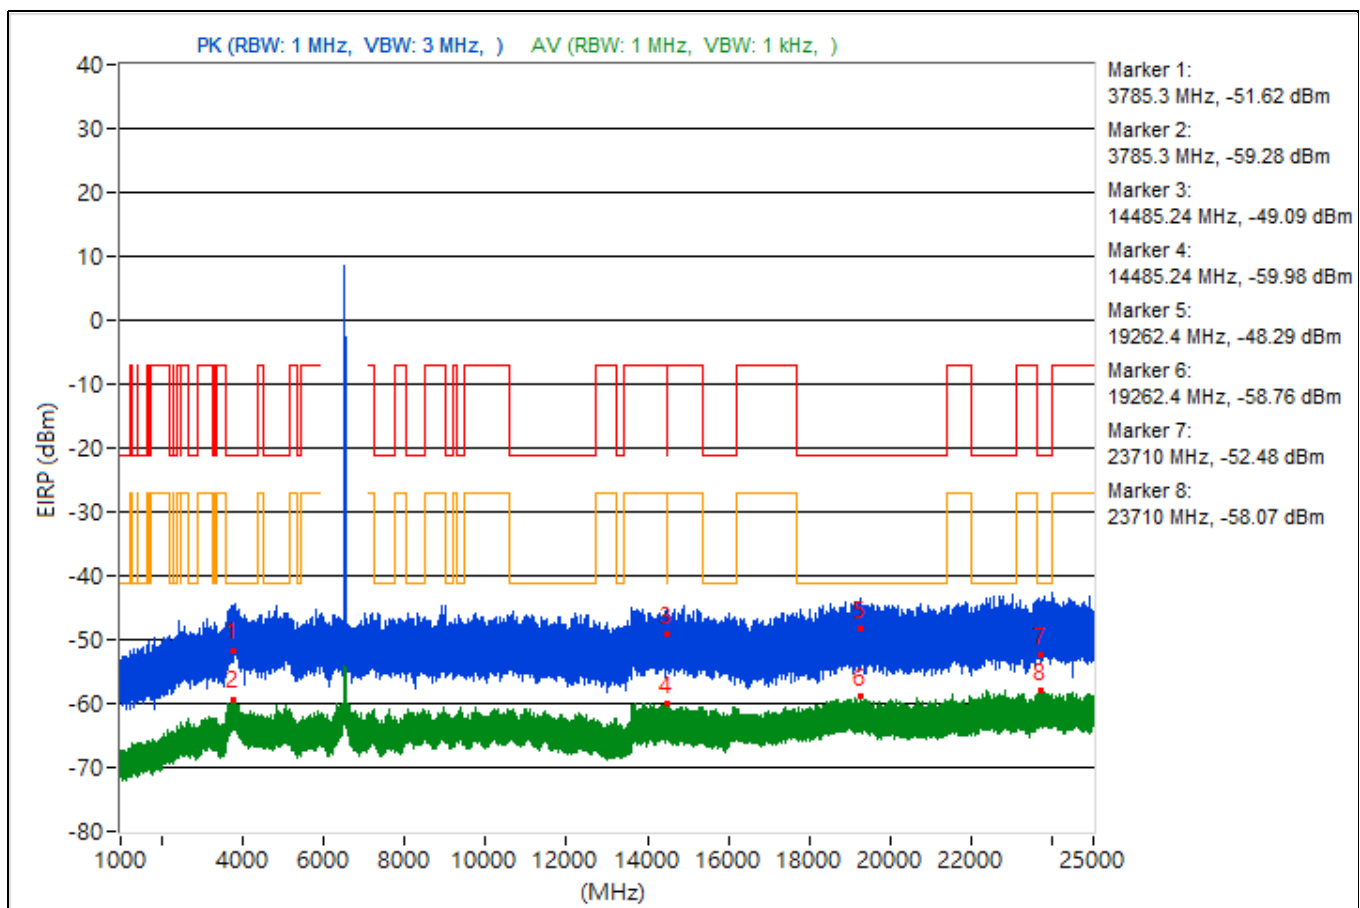


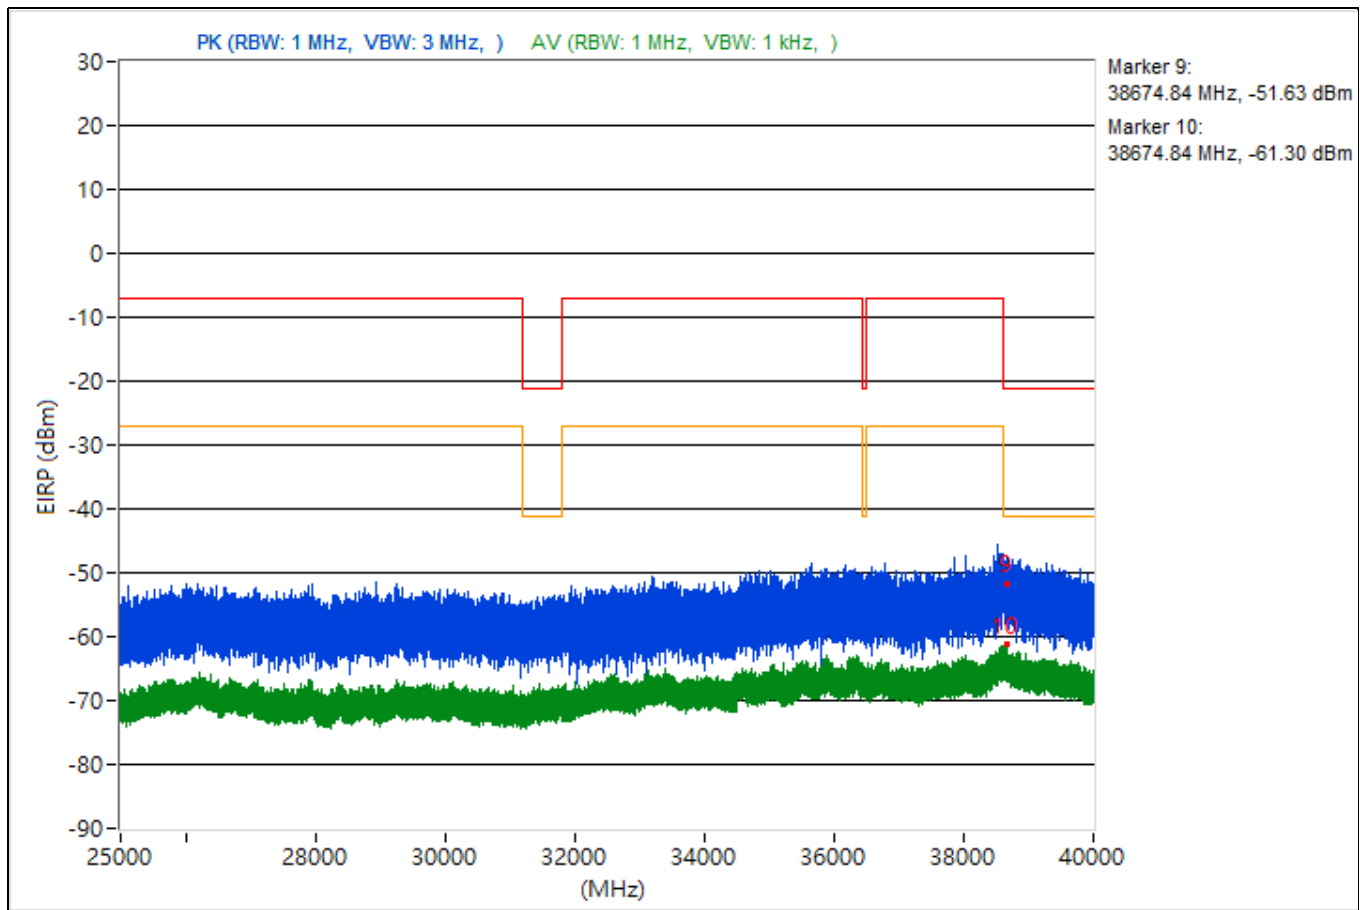


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.82	46.46 PK	74	-27.54	-53.72	4.92	-48.8
2	3811.82	35.75 AV	54	-18.25	-64.43	4.92	-59.51
3	14471.38	45.76 PK	74	-28.24	-54.42	4.92	-49.5
4	14471.38	34.97 AV	54	-19.03	-65.21	4.92	-60.29
5	18943.8	45.5 PK	74	-28.5	-54.68	4.92	-49.76
6	18943.8	36.79 AV	54	-17.21	-63.39	4.92	-58.47
7	22724.8	43.85 PK	74	-30.15	-56.33	4.92	-51.41
8	22724.8	37.01 AV	54	-16.99	-63.17	4.92	-58.25
9	38731.2	44.75 PK	74	-29.25	-55.43	4.92	-50.51
10	38731.2	33.15 AV	54	-20.85	-67.03	4.92	-62.11

Note: Margin value = Emission Level - Limit value

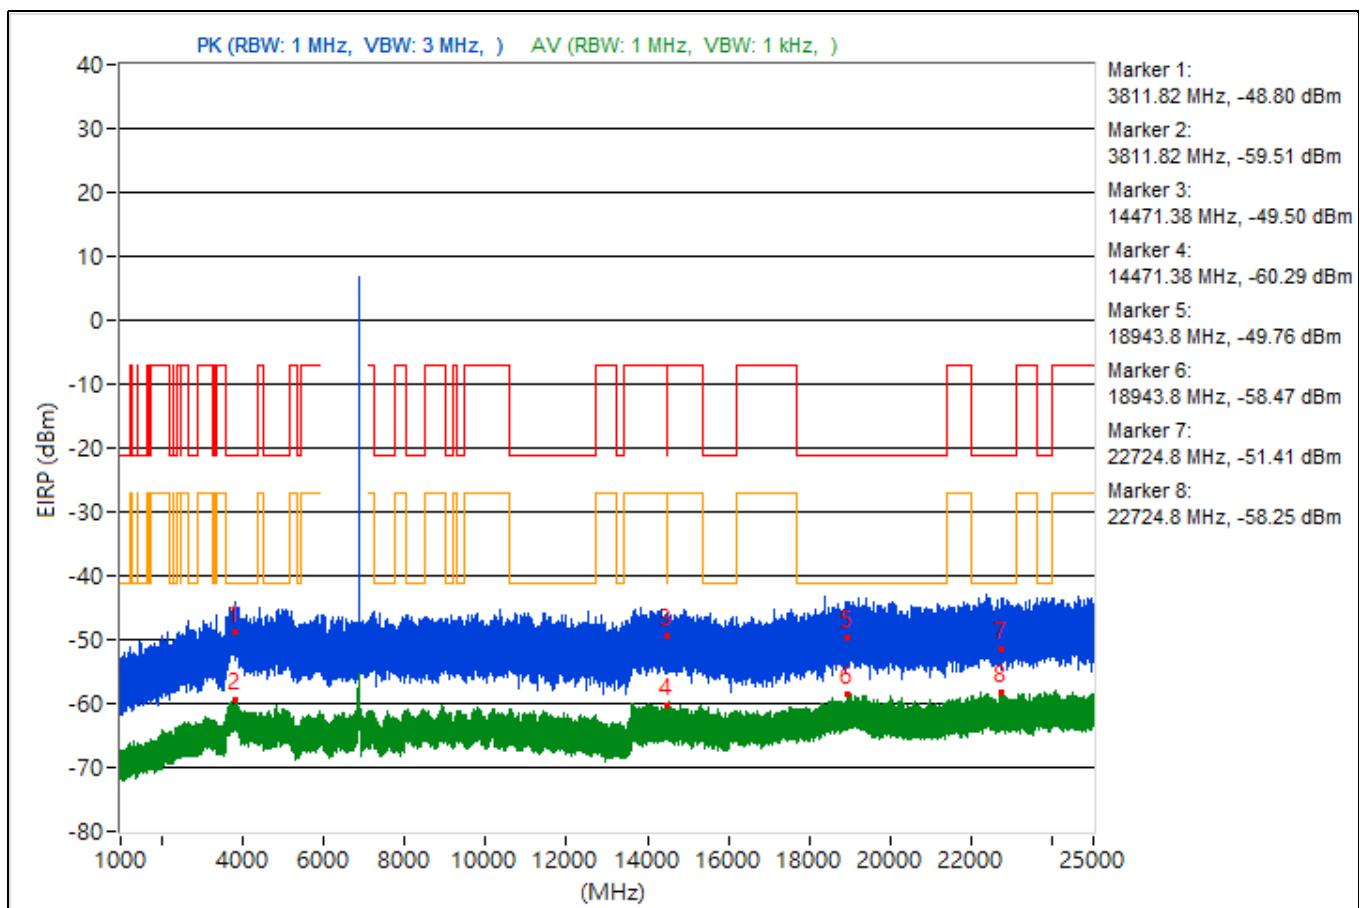


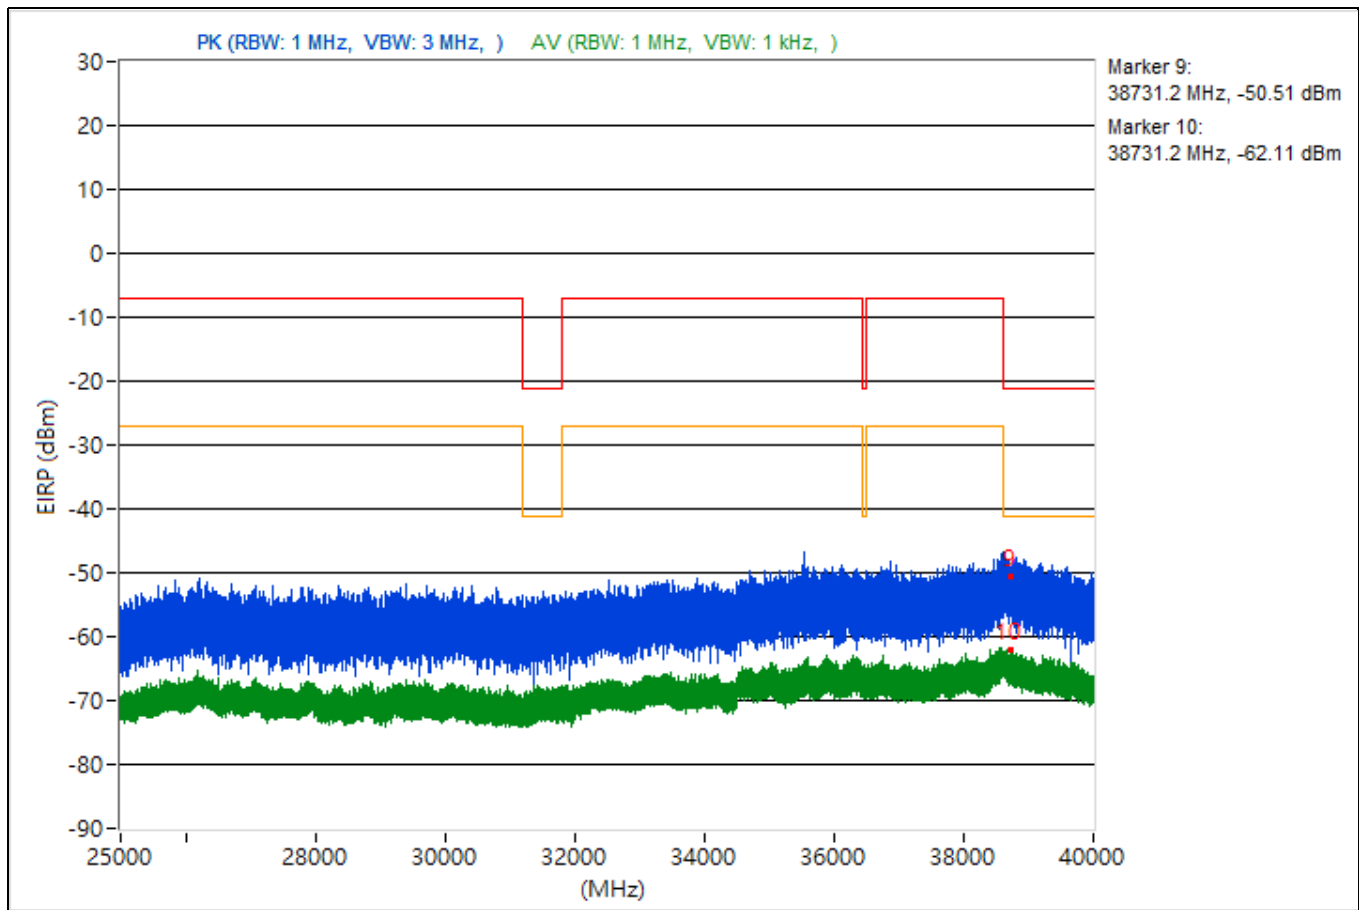


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.58	47.13 PK	74	-26.87	-53.05	4.92	-48.13
2	3796.58	35.94 AV	54	-18.06	-64.24	4.92	-59.32
3	14480.8	46.59 PK	74	-27.41	-53.59	4.92	-48.67
4	14480.8	34.82 AV	54	-19.18	-65.36	4.92	-60.44
5	19178.3	42.87 PK	74	-31.13	-57.31	4.92	-52.39
6	19178.3	37.17 AV	54	-16.83	-63.01	4.92	-58.09
7	22372.1	49.35 PK	74	-24.65	-50.83	4.92	-45.91
8	22372.1	37.86 AV	54	-16.14	-62.32	4.92	-57.4
9	38647.56	43.61 PK	74	-30.39	-56.57	4.92	-51.65
10	38647.56	34.03 AV	54	-19.97	-66.15	4.92	-61.23

Note: Margin value = Emission Level - Limit value

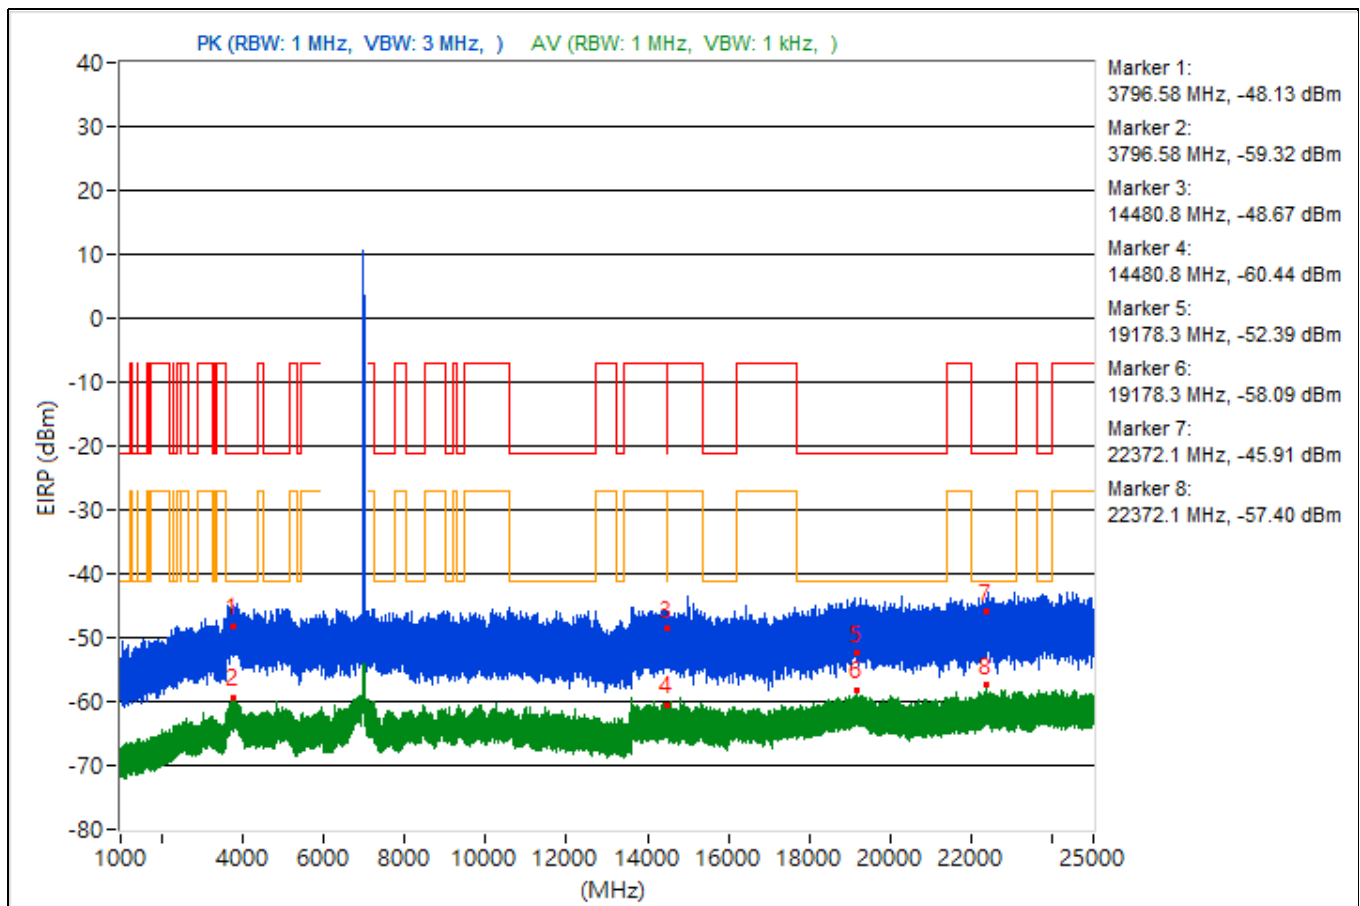


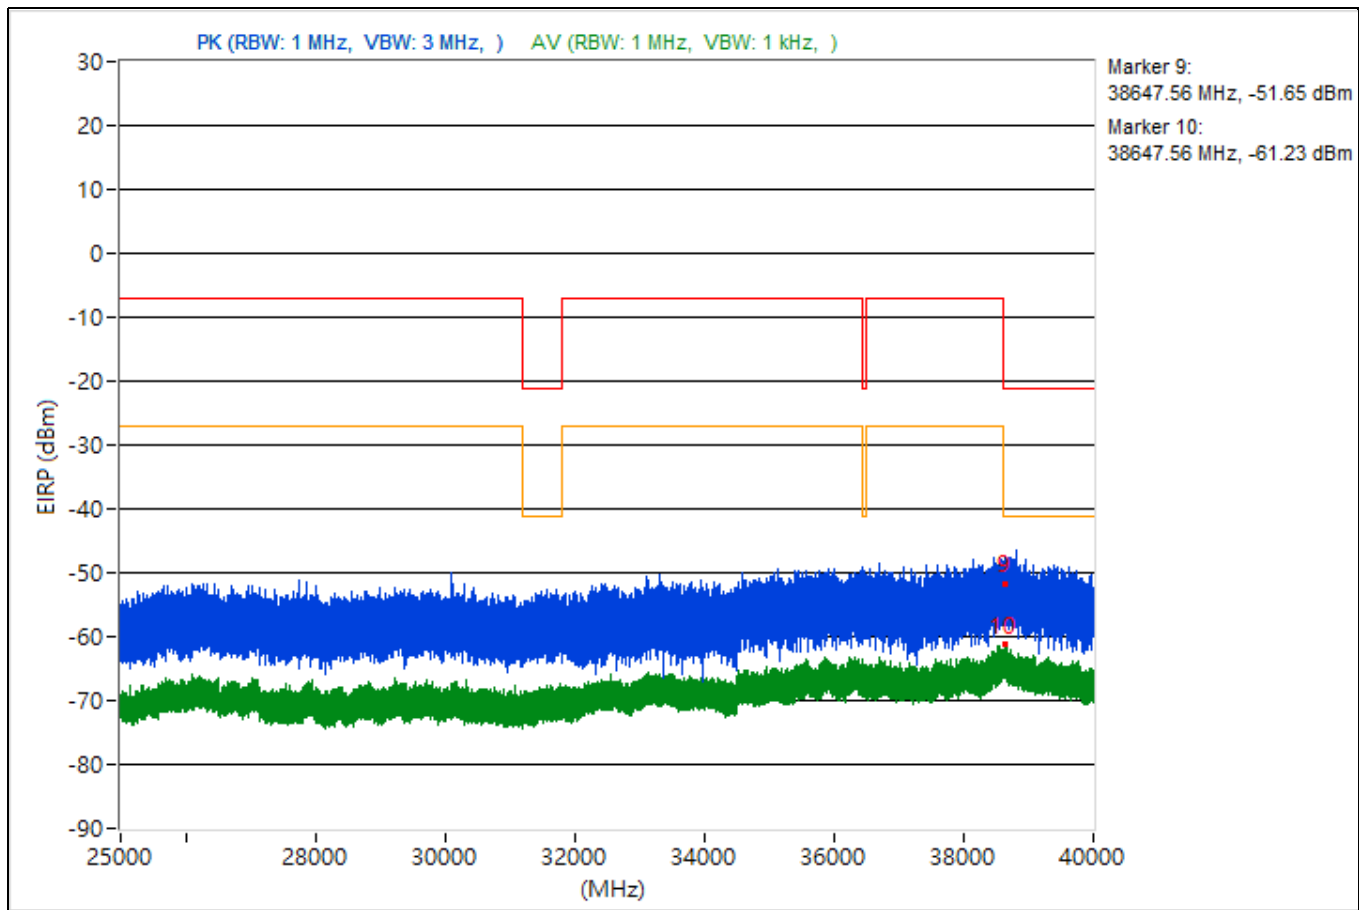


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.84	47.28 PK	74	-26.72	-52.9	4.92	-47.98
2	3785.84	36.1 AV	54	-17.9	-64.08	4.92	-59.16
3	11509.78	46.76 PK	74	-27.24	-53.42	4.92	-48.5
4	11509.78	34.63 AV	54	-19.37	-65.55	4.92	-60.63
5	19148.8	44.53 PK	74	-29.47	-55.65	4.92	-50.73
6	19148.8	36.3 AV	54	-17.7	-63.88	4.92	-58.96
7	23656.6	45.85 PK	74	-28.15	-54.33	4.92	-49.41
8	23656.6	37.56 AV	54	-16.44	-62.62	4.92	-57.7
9	38609.33	45.38 PK	74	-28.62	-54.8	4.92	-49.88
10	38609.33	33.66 AV	54	-20.34	-66.52	4.92	-61.6

Note: Margin value = Emission Level - Limit value

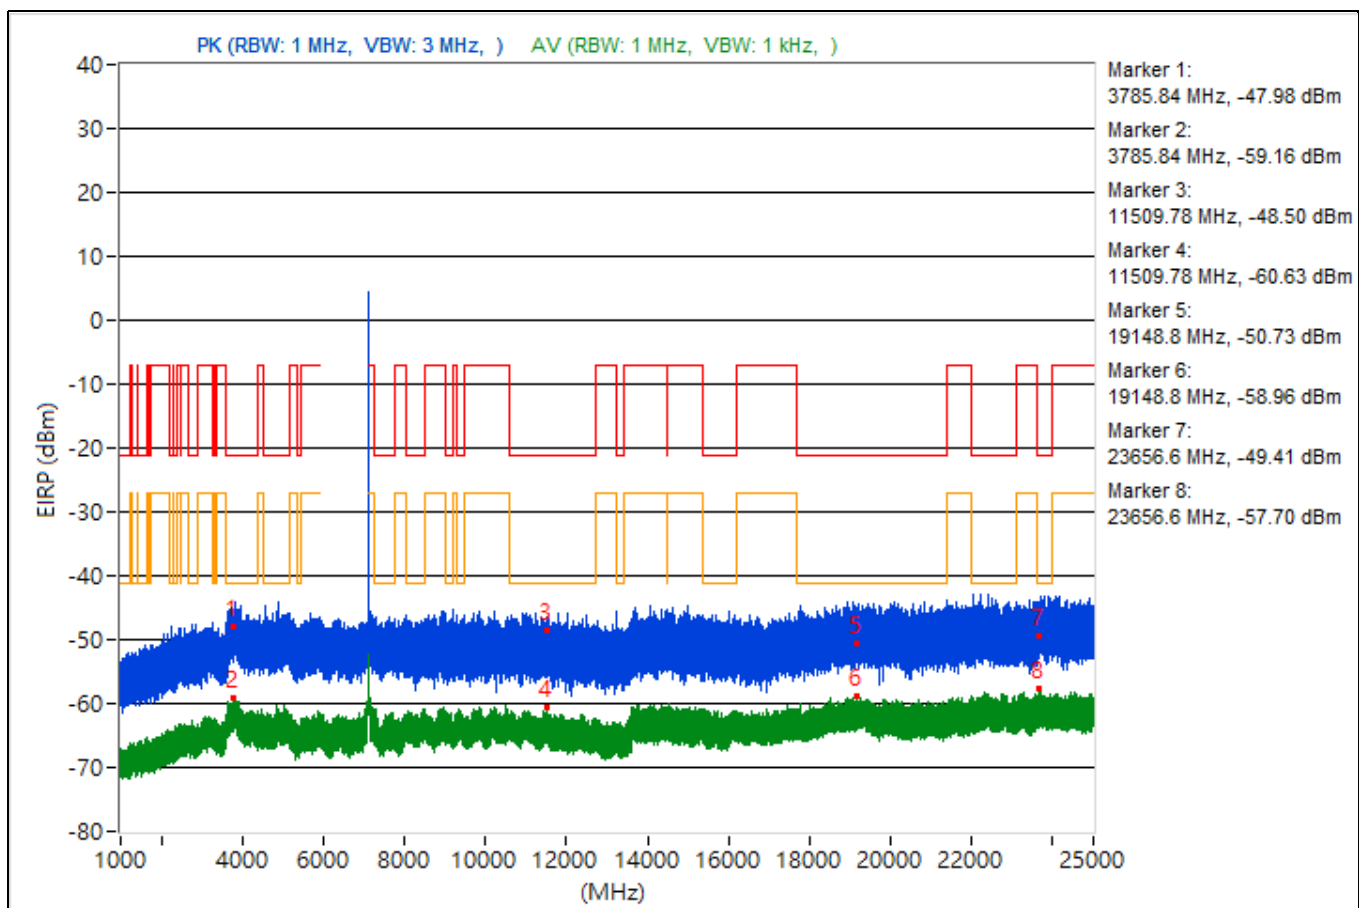


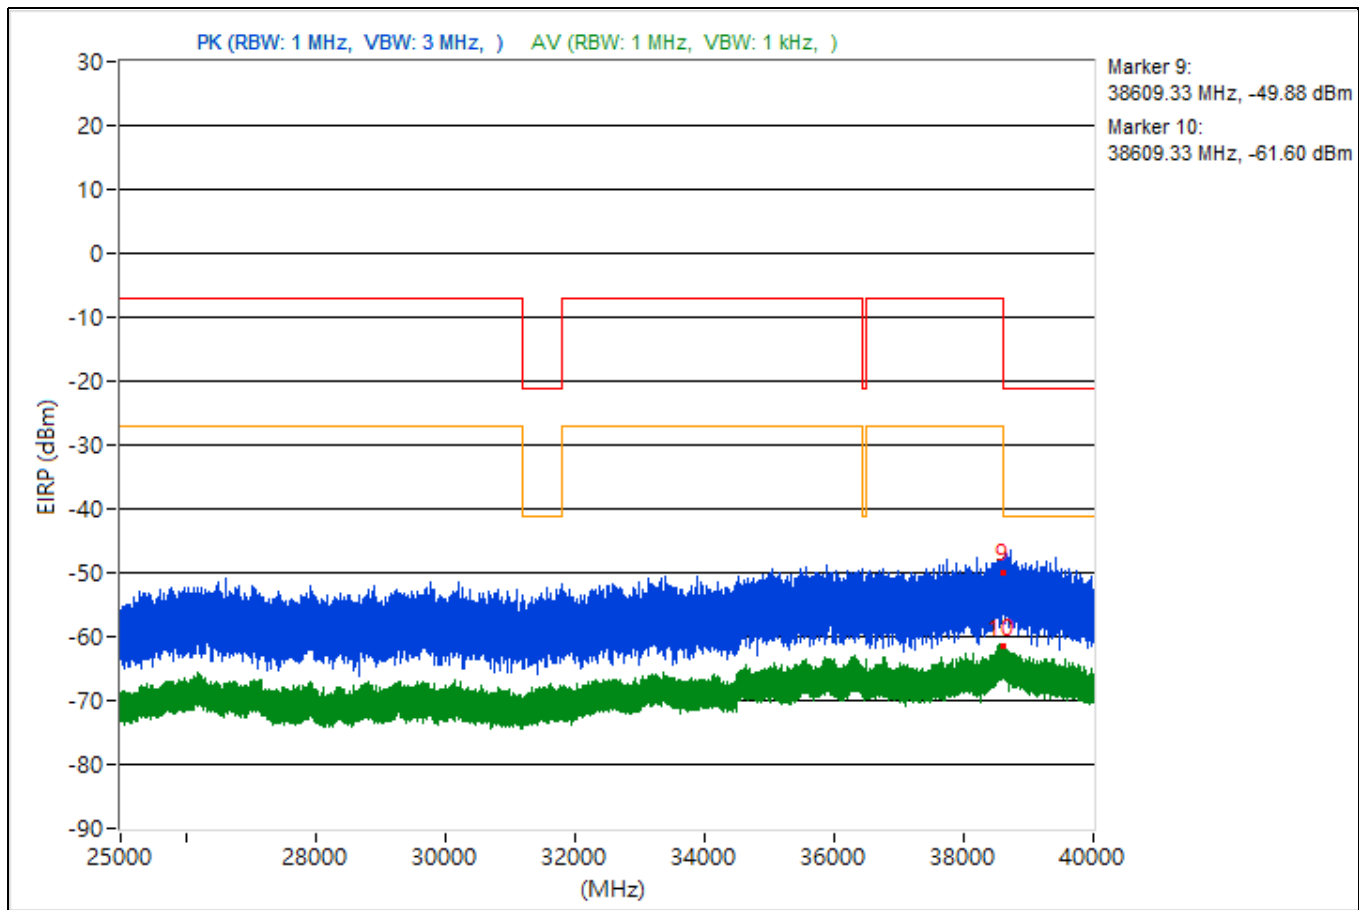


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3838.11	45.17 PK	74	-28.83	-55.01	4.92	-50.09
2	3838.11	36.7 AV	54	-17.3	-63.48	4.92	-58.56
3	15672.44	46.47 PK	74	-27.53	-53.71	4.92	-48.79
4	15672.44	35.53 AV	54	-18.47	-64.65	4.92	-59.73
5	19490	43.27 PK	74	-30.73	-56.91	4.92	-51.99
6	19490	37.66 AV	54	-16.34	-62.52	4.92	-57.6
7	23958.1	47.9 PK	74	-26.1	-52.28	4.92	-47.36
8	23958.1	37.94 AV	54	-16.06	-62.24	4.92	-57.32
9	38607.73	41.83 PK	74	-32.17	-58.35	4.92	-53.43
10	38607.73	34.34 AV	54	-19.66	-65.84	4.92	-60.92

Note: Margin value = Emission Level - Limit value

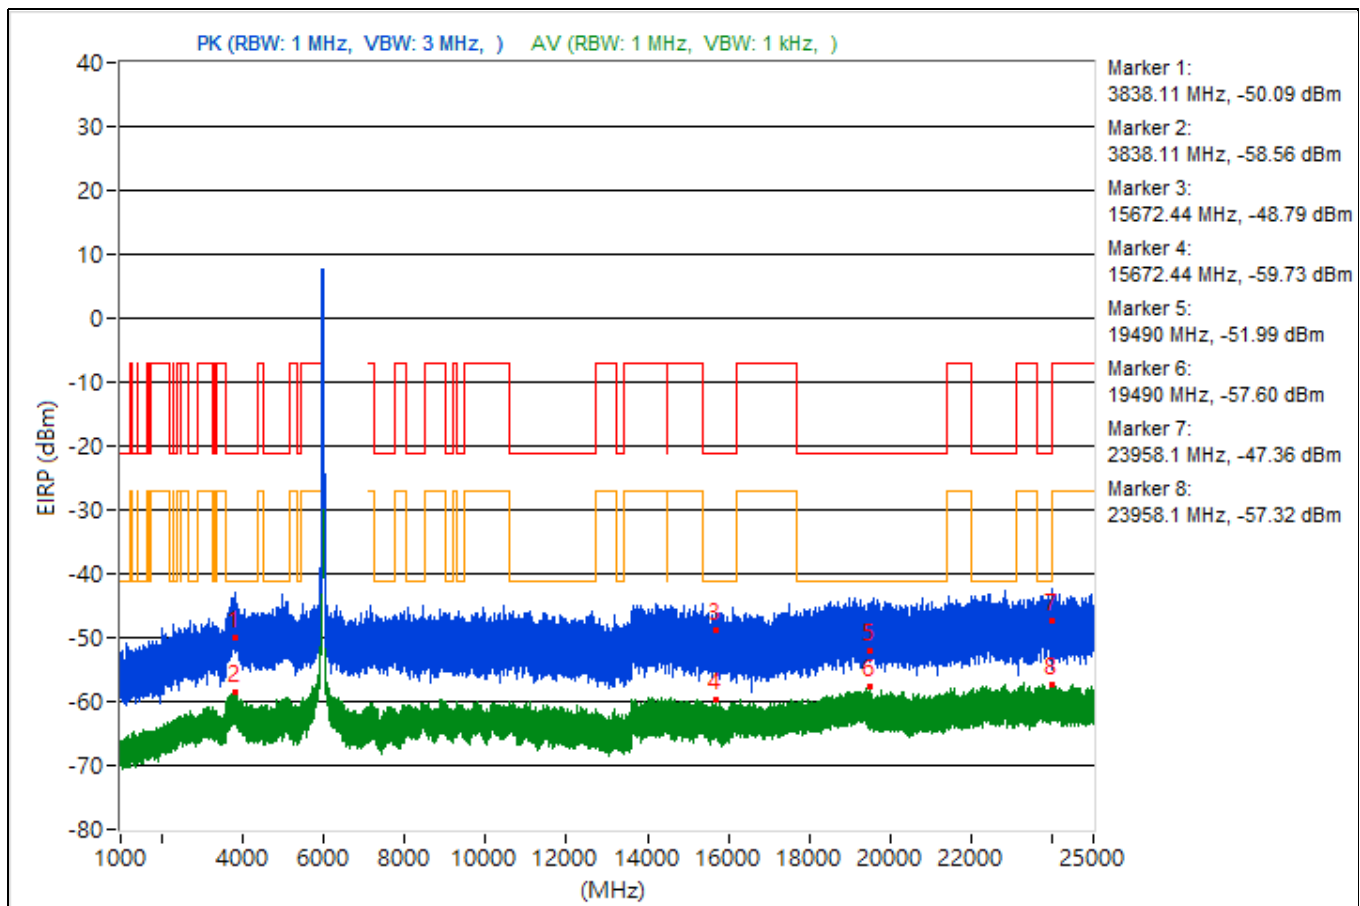


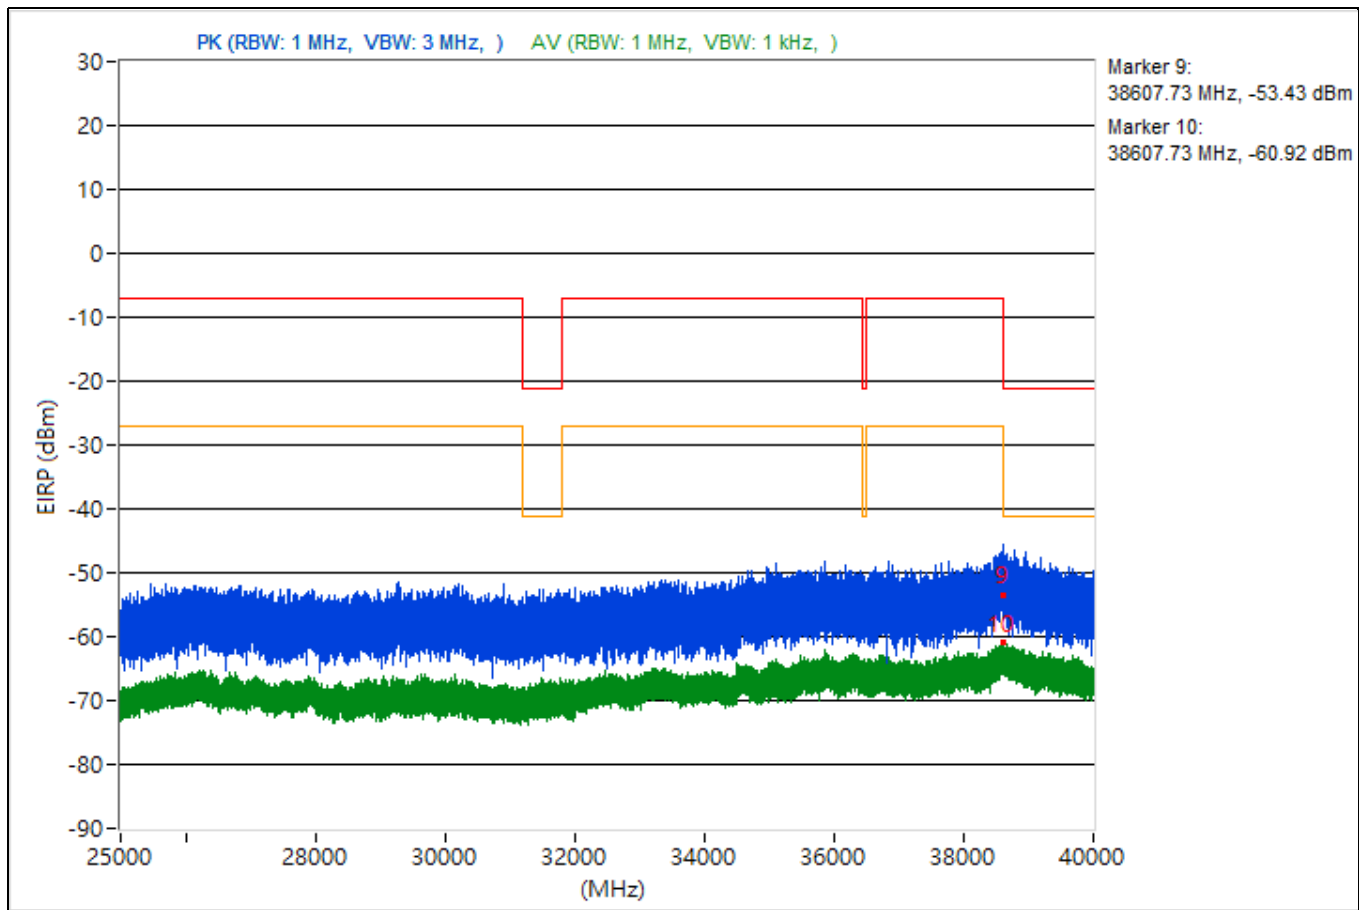


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.52	45.73 PK	74	-28.27	-54.45	4.92	-49.53
2	3819.52	37.2 AV	54	-16.8	-62.98	4.92	-58.06
3	15375.82	44.24 PK	74	-29.76	-55.94	4.92	-51.02
4	15375.82	35.45 AV	54	-18.55	-64.73	4.92	-59.81
5	19175.1	45.84 PK	74	-28.16	-54.34	4.92	-49.42
6	19175.1	36.99 AV	54	-17.01	-63.19	4.92	-58.27
7	22762.5	47.86 PK	74	-26.14	-52.32	4.92	-47.4
8	22762.5	38.22 AV	54	-15.78	-61.96	4.92	-57.04
9	38635.82	43.3 PK	74	-30.7	-56.88	4.92	-51.96
10	38635.82	35.01 AV	54	-18.99	-65.17	4.92	-60.25

Note: Margin value = Emission Level - Limit value

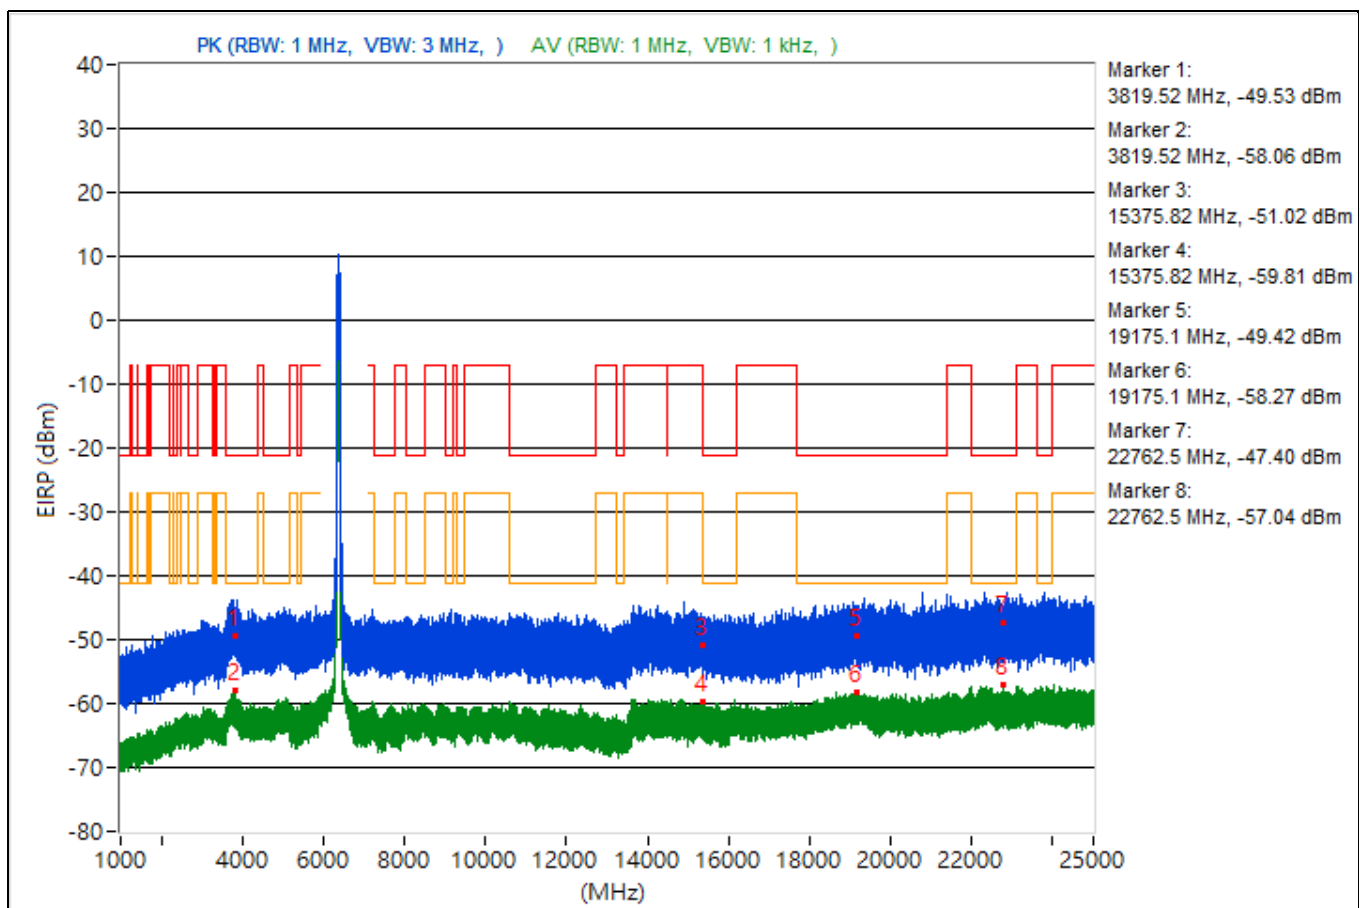


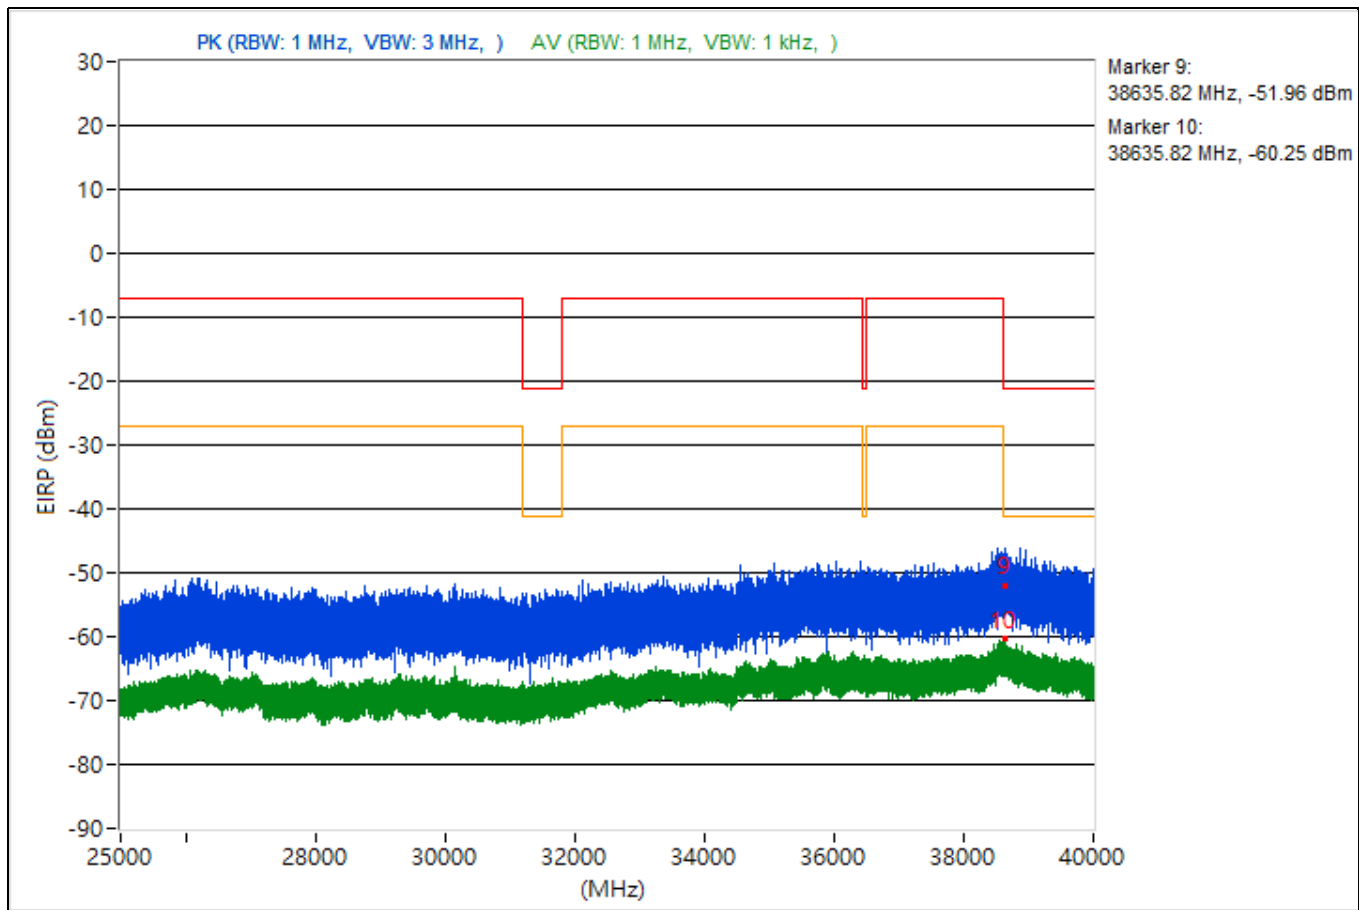


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3755.12	47.78 PK	74	-26.22	-52.4	4.92	-47.48
2	3755.12	36.75 AV	54	-17.25	-63.43	4.92	-58.51
3	8484.18	41.33 PK	74	-32.67	-58.85	4.92	-53.93
4	8484.18	35.95 AV	54	-18.05	-64.23	4.92	-59.31
5	19343.8	47.56 PK	74	-26.44	-52.62	4.92	-47.7
6	19343.8	37.5 AV	54	-16.5	-62.68	4.92	-57.76
7	22475.7	49.73 PK	74	-24.27	-50.45	4.92	-45.53
8	22475.7	37.99 AV	54	-16.01	-62.19	4.92	-57.27
9	38610.49	44 PK	74	-30	-56.18	4.92	-51.26
10	38610.49	34.2 AV	54	-19.8	-65.98	4.92	-61.06

Note: Margin value = Emission Level - Limit value

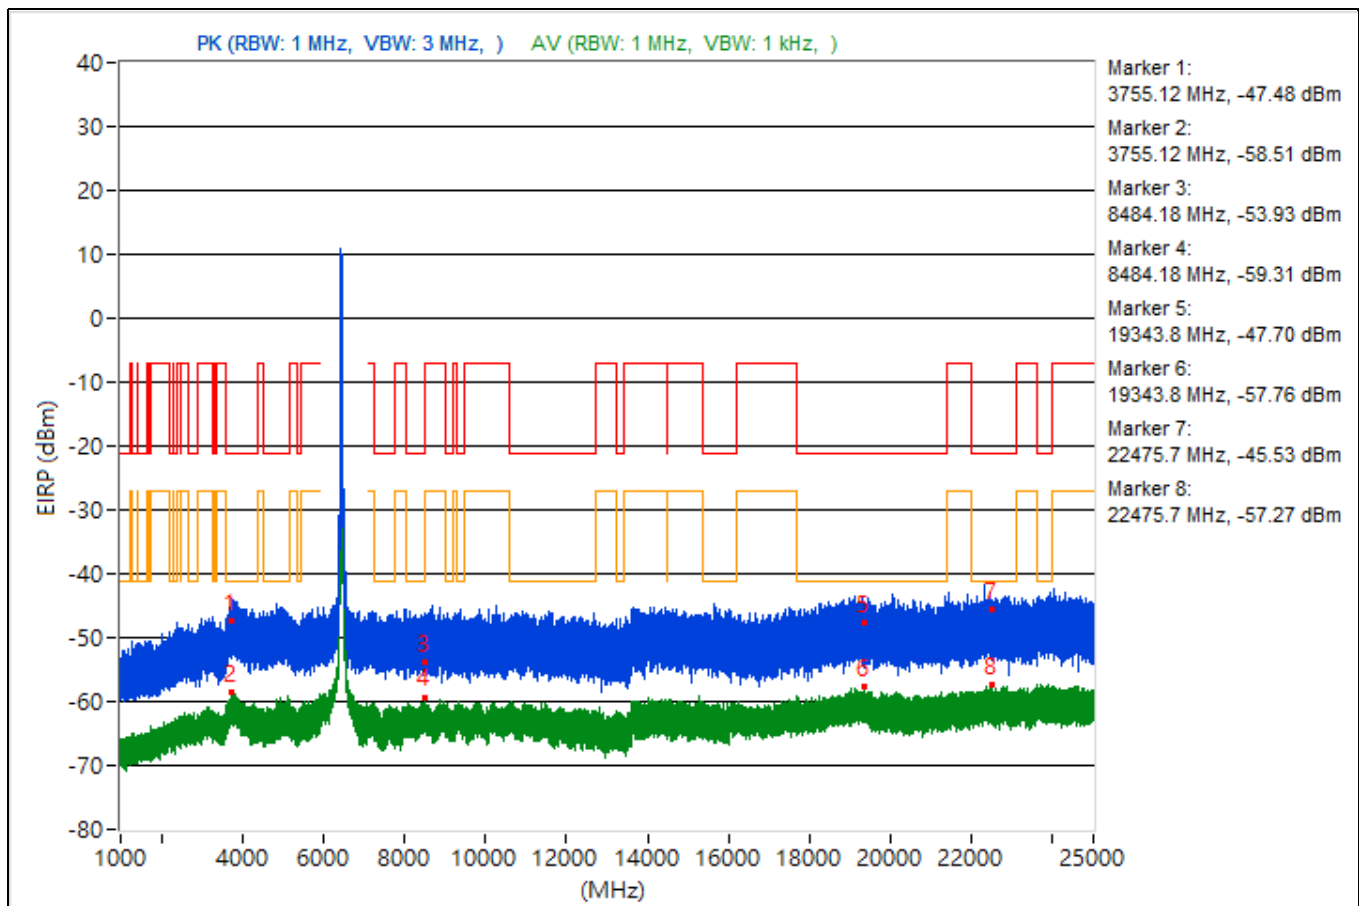


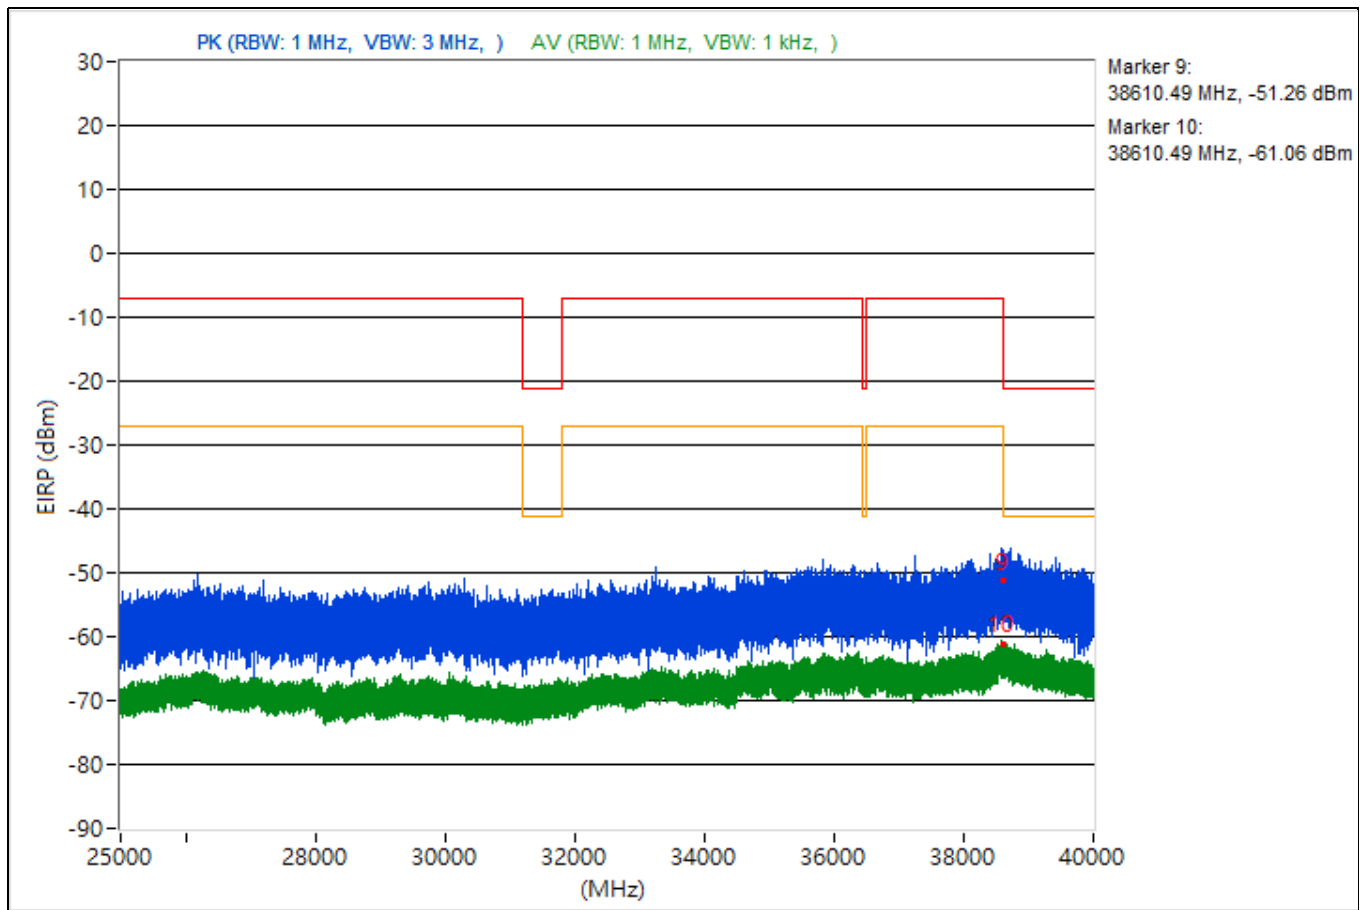


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.64	47.65 PK	74	-26.35	-52.53	4.92	-47.61
2	3830.64	36.78 AV	54	-17.22	-63.4	4.92	-58.48
3	14492.98	43.85 PK	74	-30.15	-56.33	4.92	-51.41
4	14492.98	35.52 AV	54	-18.48	-64.66	4.92	-59.74
5	19592.9	48.5 PK	74	-25.5	-51.68	4.92	-46.76
6	19592.9	37.7 AV	54	-16.3	-62.48	4.92	-57.56
7	23706.3	46.42 PK	74	-27.58	-53.76	4.92	-48.84
8	23706.3	37.88 AV	54	-16.12	-62.3	4.92	-57.38
9	38637.42	40.45 PK	74	-33.55	-59.73	4.92	-54.81
10	38637.42	34.65 AV	54	-19.35	-65.53	4.92	-60.61

Note: Margin value = Emission Level - Limit value

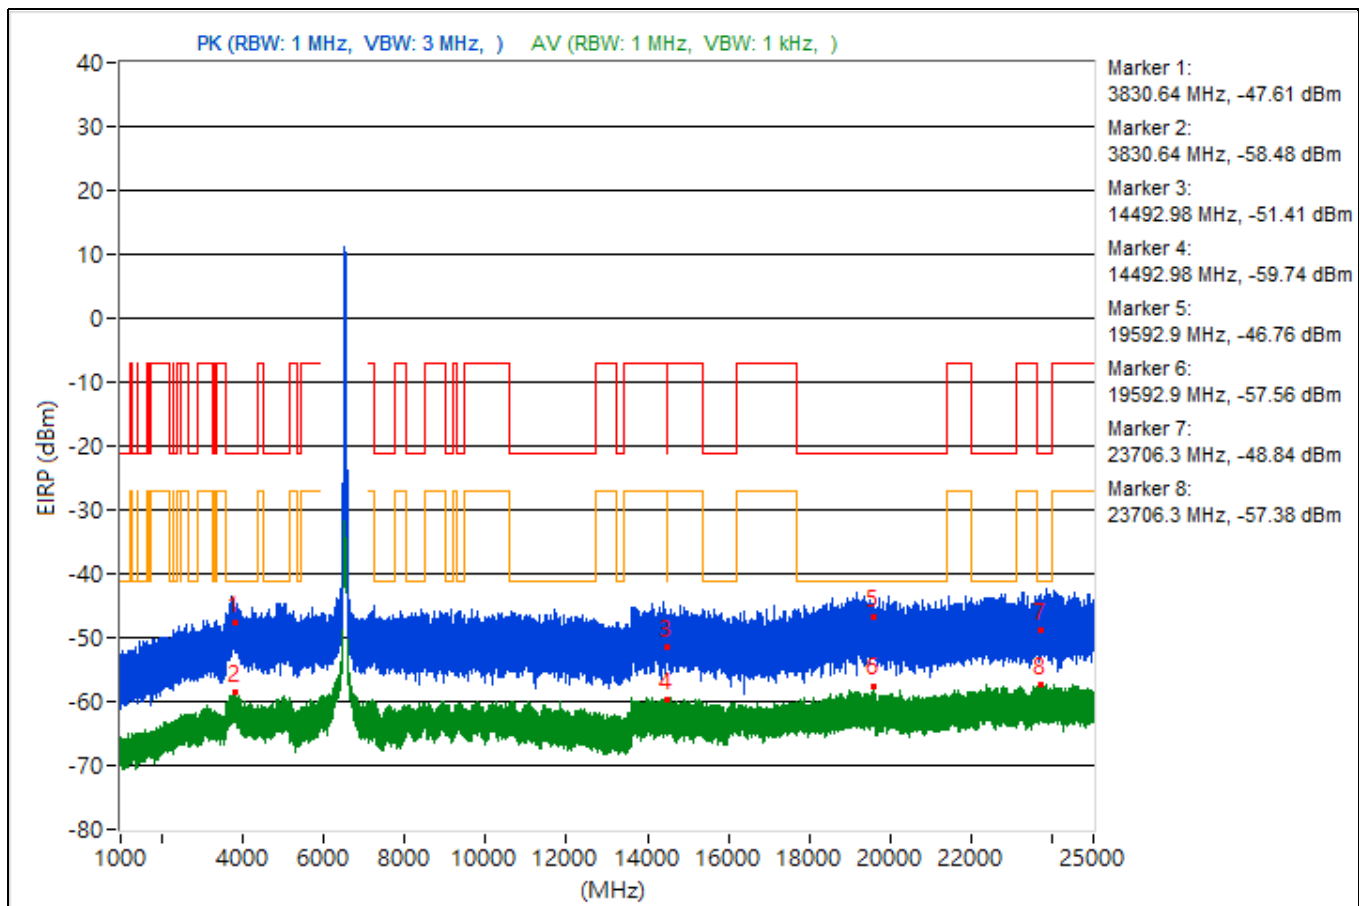


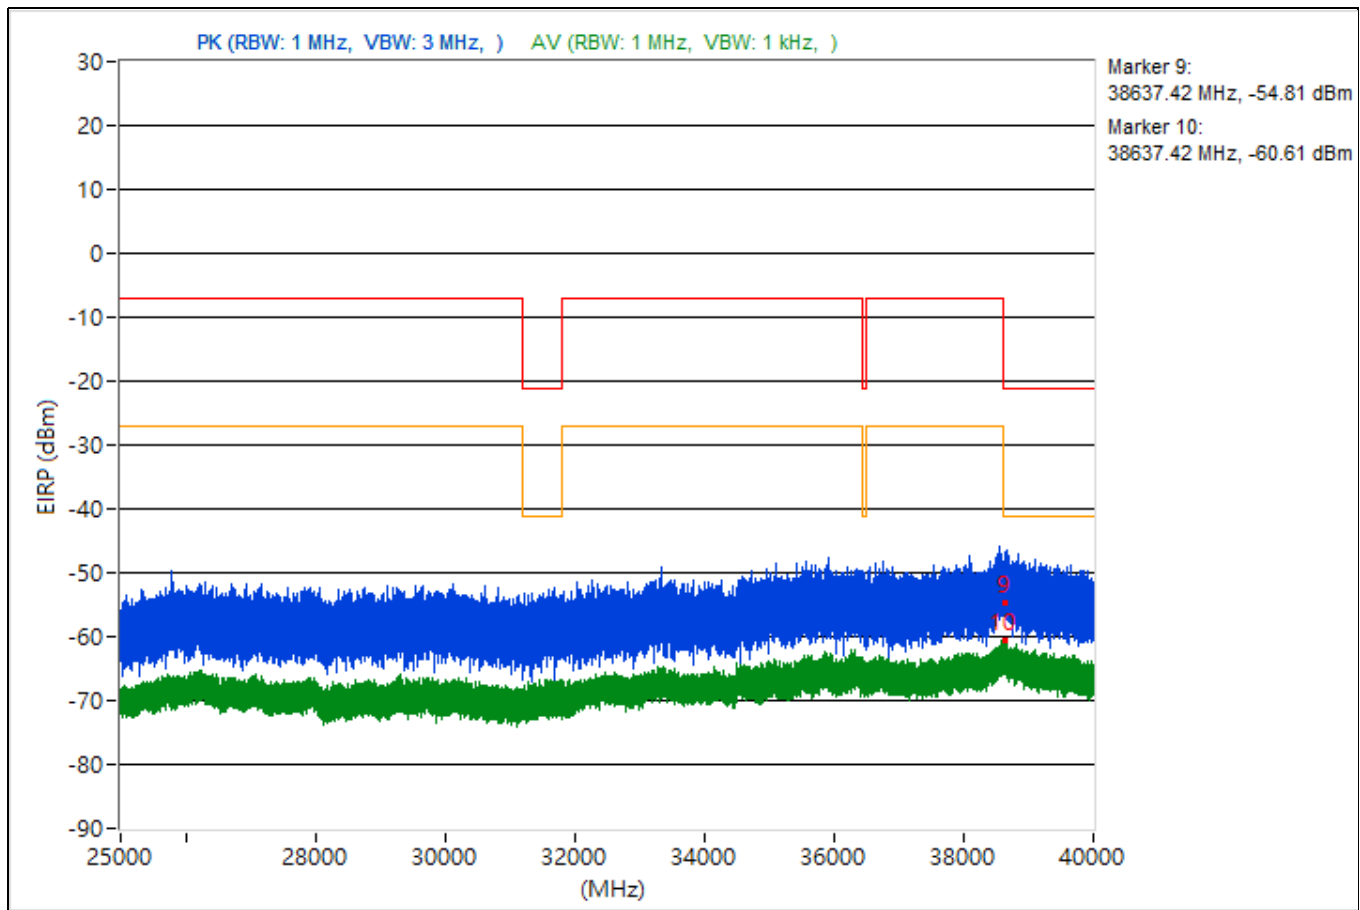


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.14	45.84 PK	74	-28.16	-54.34	4.92	-49.42
2	3785.14	36.77 AV	54	-17.23	-63.41	4.92	-58.49
3	14484.18	44.3 PK	74	-29.7	-55.88	4.92	-50.96
4	14484.18	35.72 AV	54	-18.28	-64.46	4.92	-59.54
5	19414.6	49.17 PK	74	-24.83	-51.01	4.92	-46.09
6	19414.6	37.56 AV	54	-16.44	-62.62	4.92	-57.7
7	22335.2	45.61 PK	74	-28.39	-54.57	4.92	-49.65
8	22335.2	38.06 AV	54	-15.94	-62.12	4.92	-57.2
9	38613.24	41.07 PK	74	-32.93	-59.11	4.92	-54.19
10	38613.24	34.83 AV	54	-19.17	-65.35	4.92	-60.43

Note: Margin value = Emission Level - Limit value

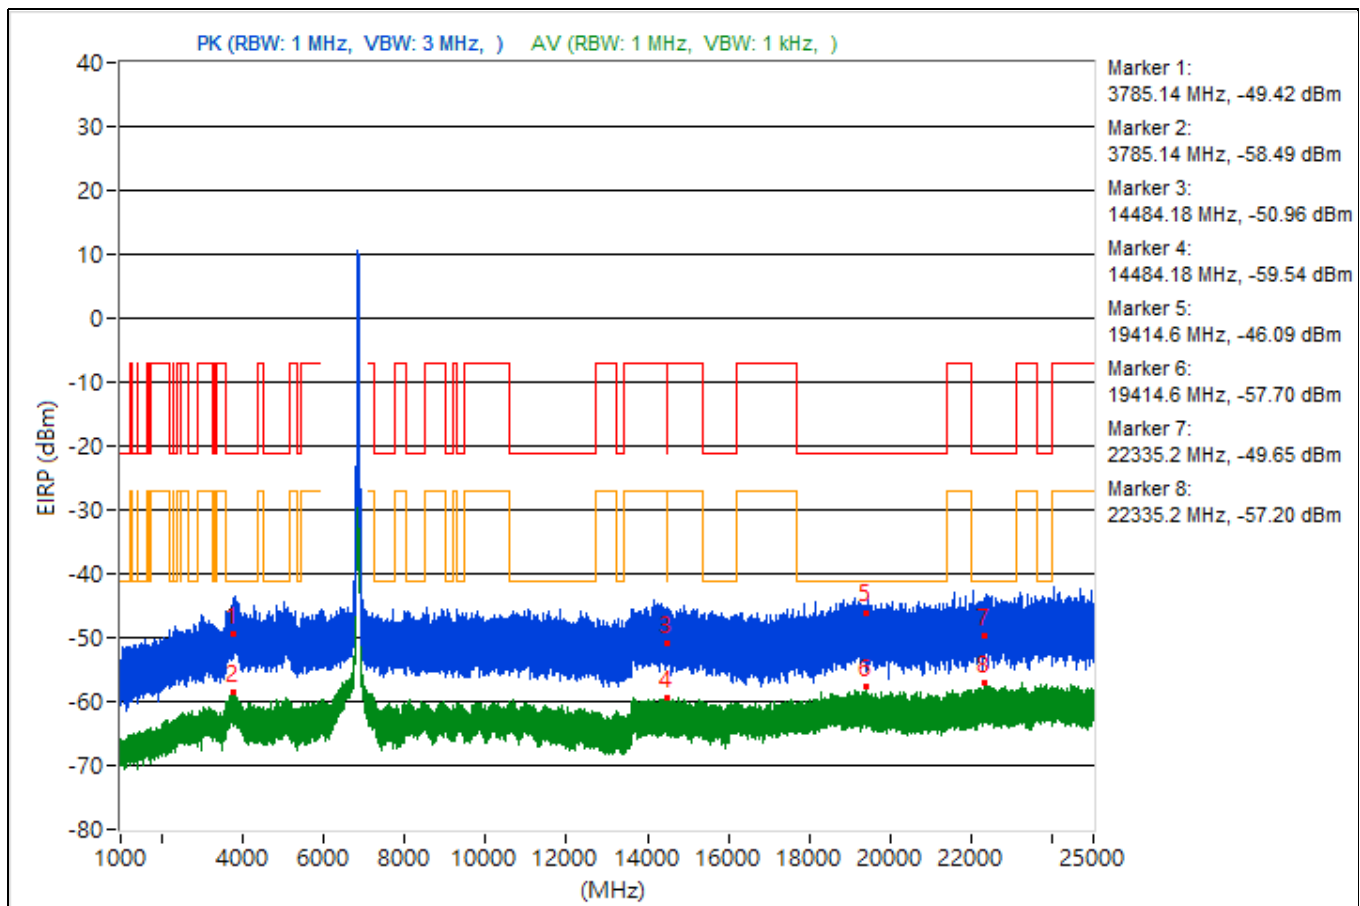


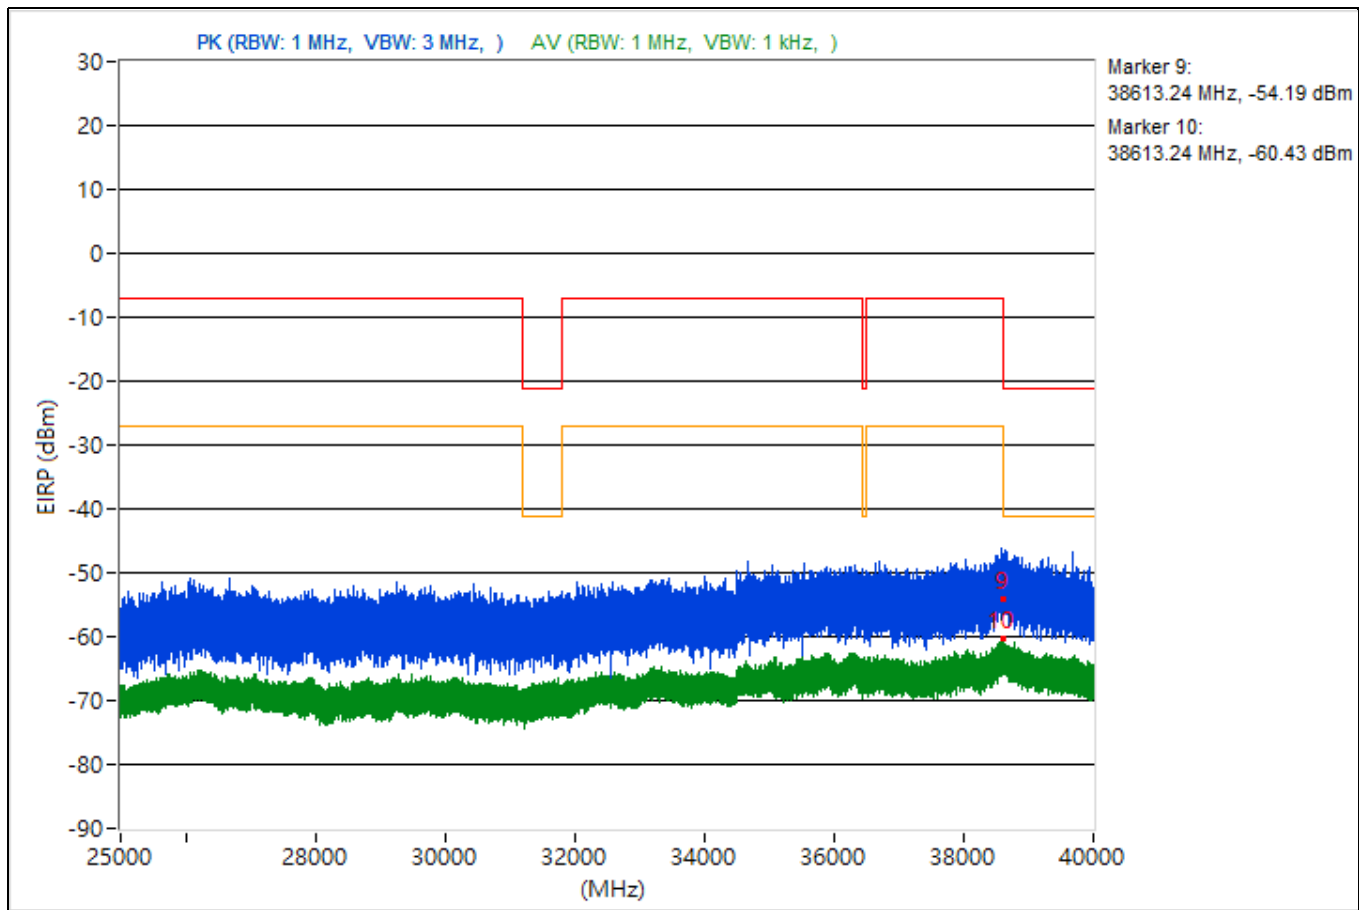


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.81	47.24 PK	74	-26.76	-52.94	4.92	-48.02
2	3782.81	36.85 AV	54	-17.15	-63.33	4.92	-58.41
3	7251.93	42.91 PK	74	-31.09	-57.27	4.92	-52.35
4	7251.93	36.71 AV	54	-17.29	-63.47	4.92	-58.55
5	18792	43.3 PK	74	-30.7	-56.88	4.92	-51.96
6	18792	37.14 AV	54	-16.86	-63.04	4.92	-58.12
7	23960.5	46.7 PK	74	-27.3	-53.48	4.92	-48.56
8	23960.5	38.24 AV	54	-15.76	-61.94	4.92	-57.02
9	38621.6	45.67 PK	74	-28.33	-54.51	4.92	-49.59
10	38621.6	34.57 AV	54	-19.43	-65.61	4.92	-60.69

Note: Margin value = Emission Level - Limit value

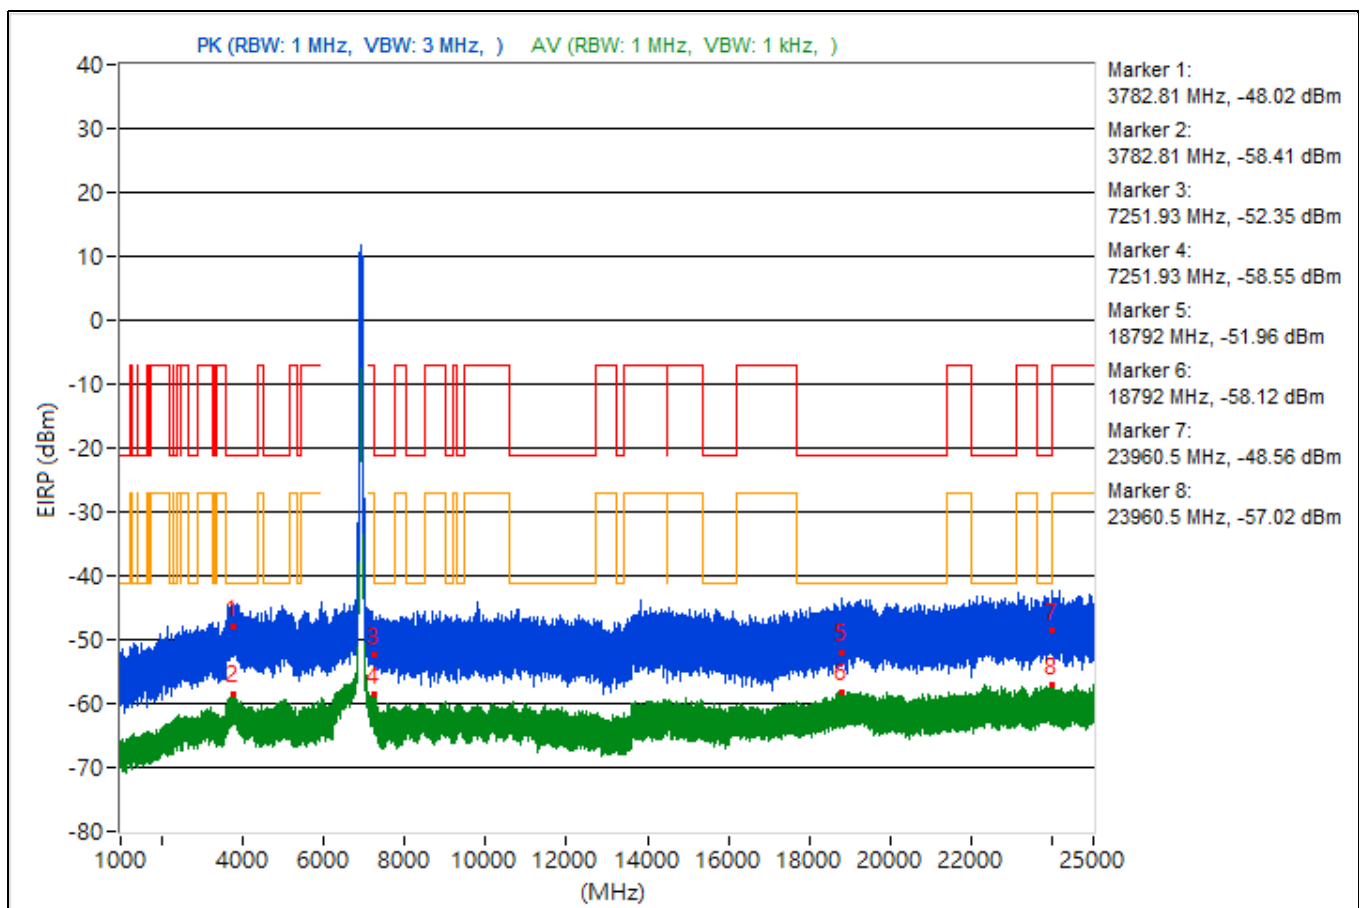


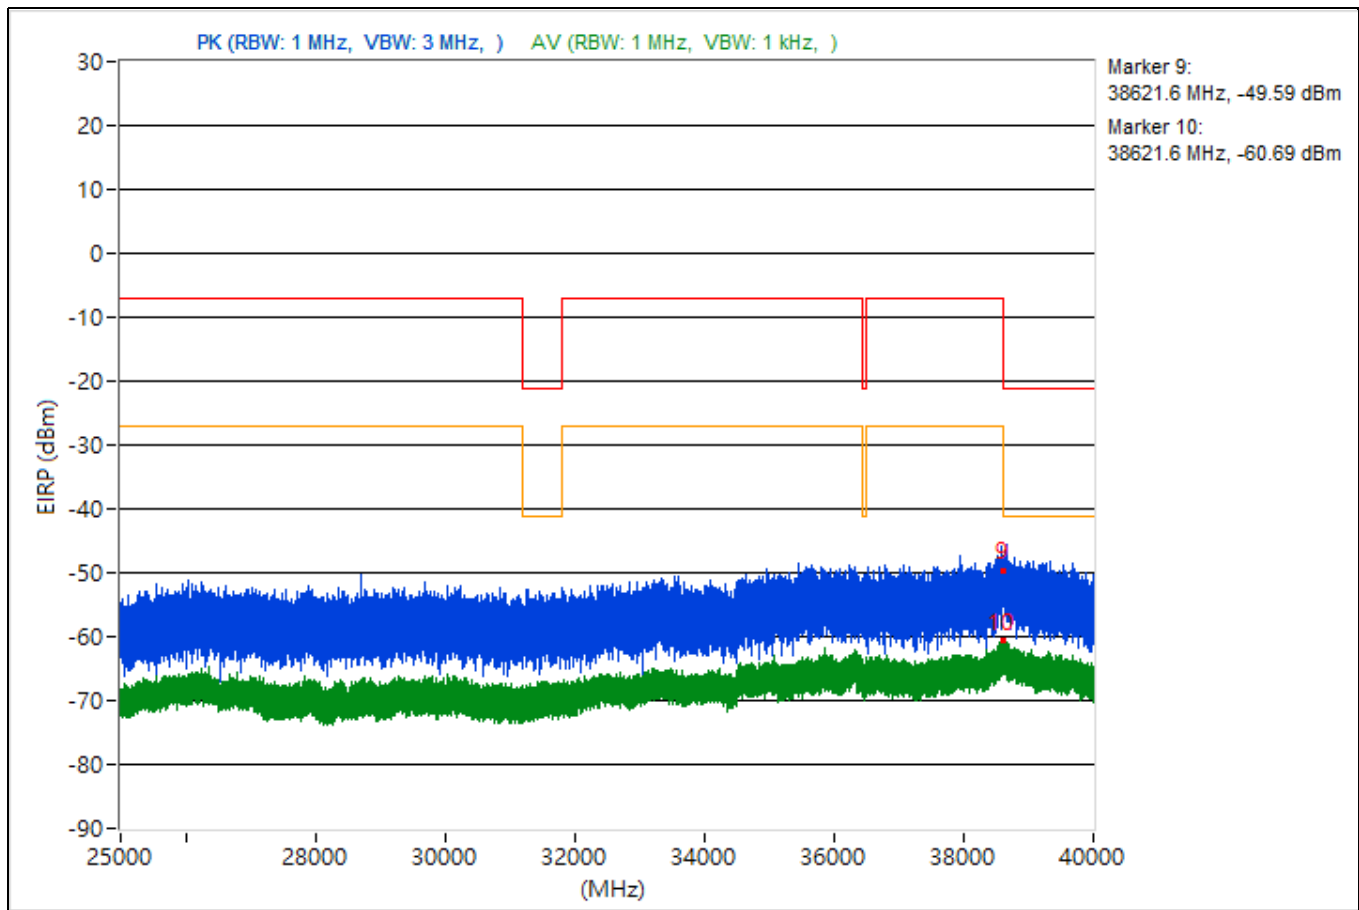


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.22	45.99 PK	74	-28.01	-54.19	4.92	-49.27
2	3813.22	36.82 AV	54	-17.18	-63.36	4.92	-58.44
3	7280.63	45.14 PK	74	-28.86	-55.04	4.92	-50.12
4	7280.63	36.13 AV	54	-17.87	-64.05	4.92	-59.13
5	18915.7	45.86 PK	74	-28.14	-54.32	4.92	-49.4
6	18915.7	37.25 AV	54	-16.75	-62.93	4.92	-58.01
7	23765.4	48.77 PK	74	-25.23	-51.41	4.92	-46.49
8	23765.4	38.03 AV	54	-15.97	-62.15	4.92	-57.23
9	38630.04	45.12 PK	74	-28.88	-55.06	4.92	-50.14
10	38630.04	34.6 AV	54	-19.4	-65.58	4.92	-60.66

Note: Margin value = Emission Level - Limit value

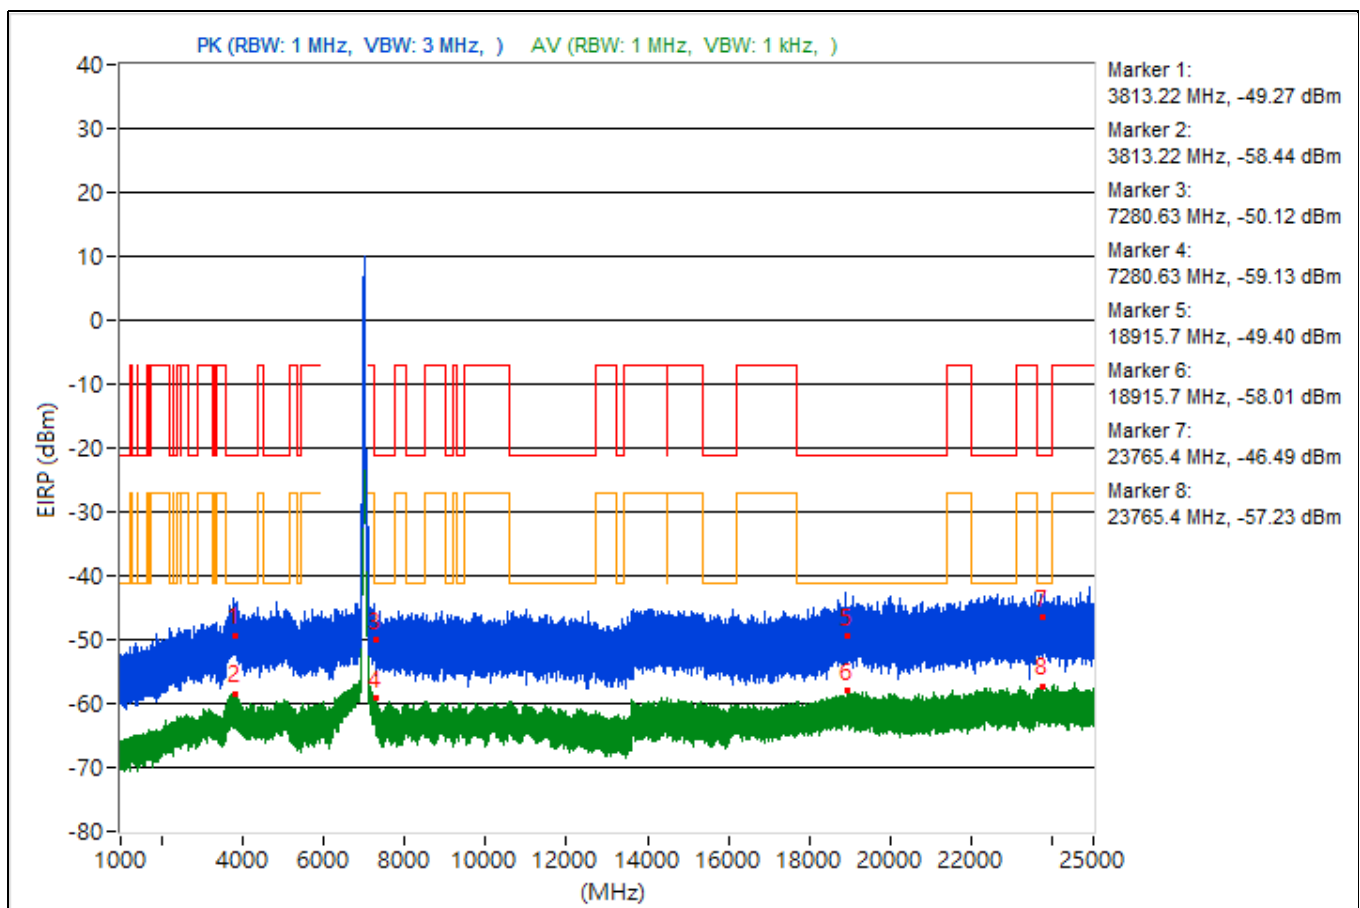


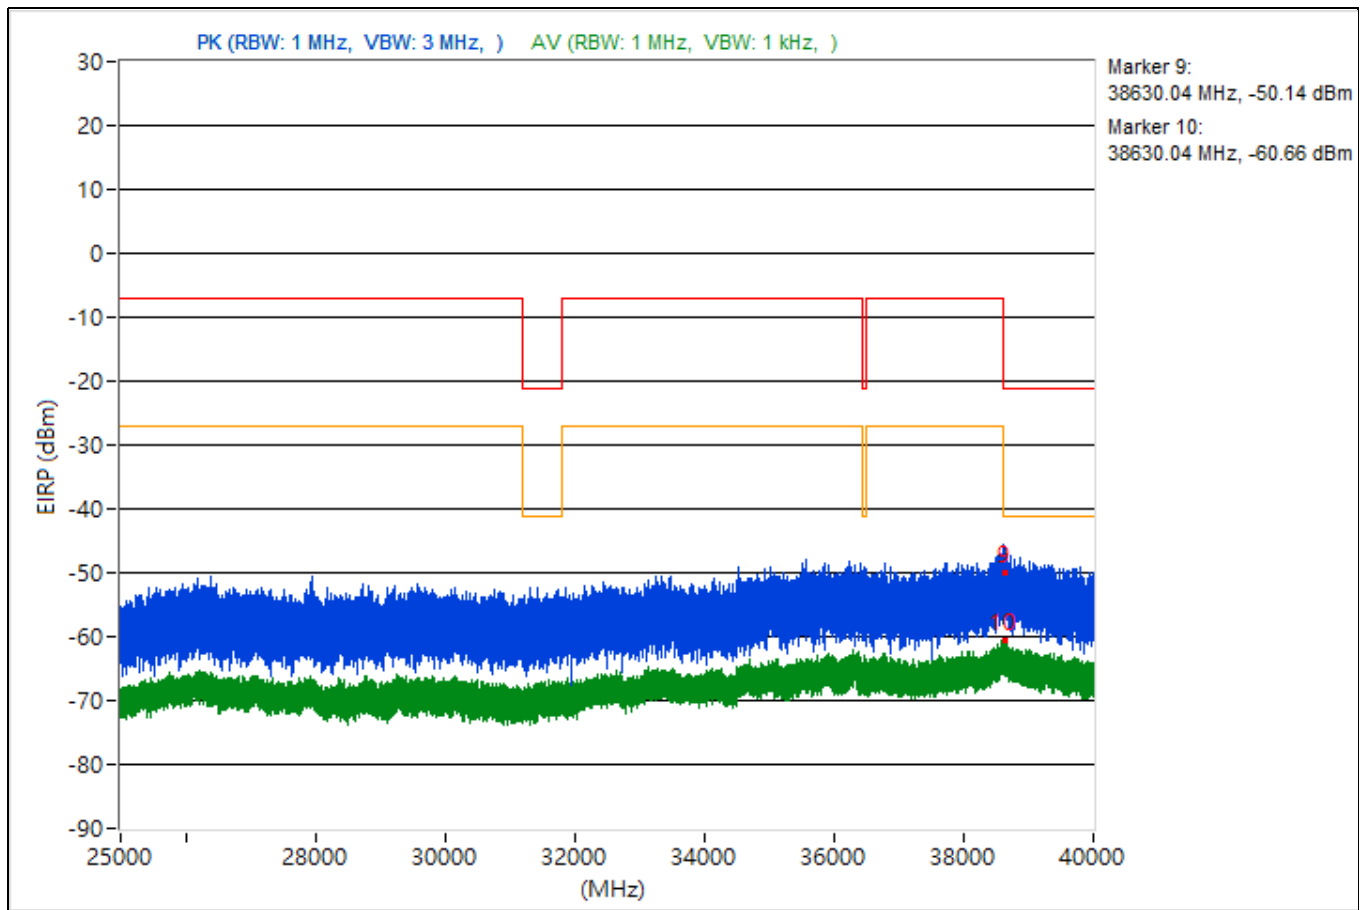


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.07	43.55 PK	74	-30.45	-56.63	4.92	-51.71
2	3806.07	36.74 AV	54	-17.26	-63.44	4.92	-58.52
3	14475.56	42.14 PK	74	-31.86	-58.04	4.92	-53.12
4	14475.56	35.58 AV	54	-18.42	-64.6	4.92	-59.68
5	18997.6	46.86 PK	74	-27.14	-53.32	4.92	-48.4
6	18997.6	37.33 AV	54	-16.67	-62.85	4.92	-57.93
7	23661.9	48.16 PK	74	-25.84	-52.02	4.92	-47.1
8	23661.9	38.03 AV	54	-15.97	-62.15	4.92	-57.23
9	38620.36	42.84 PK	74	-31.16	-57.34	4.92	-52.42
10	38620.36	34.88 AV	54	-19.12	-65.3	4.92	-60.38

Note: Margin value = Emission Level - Limit value

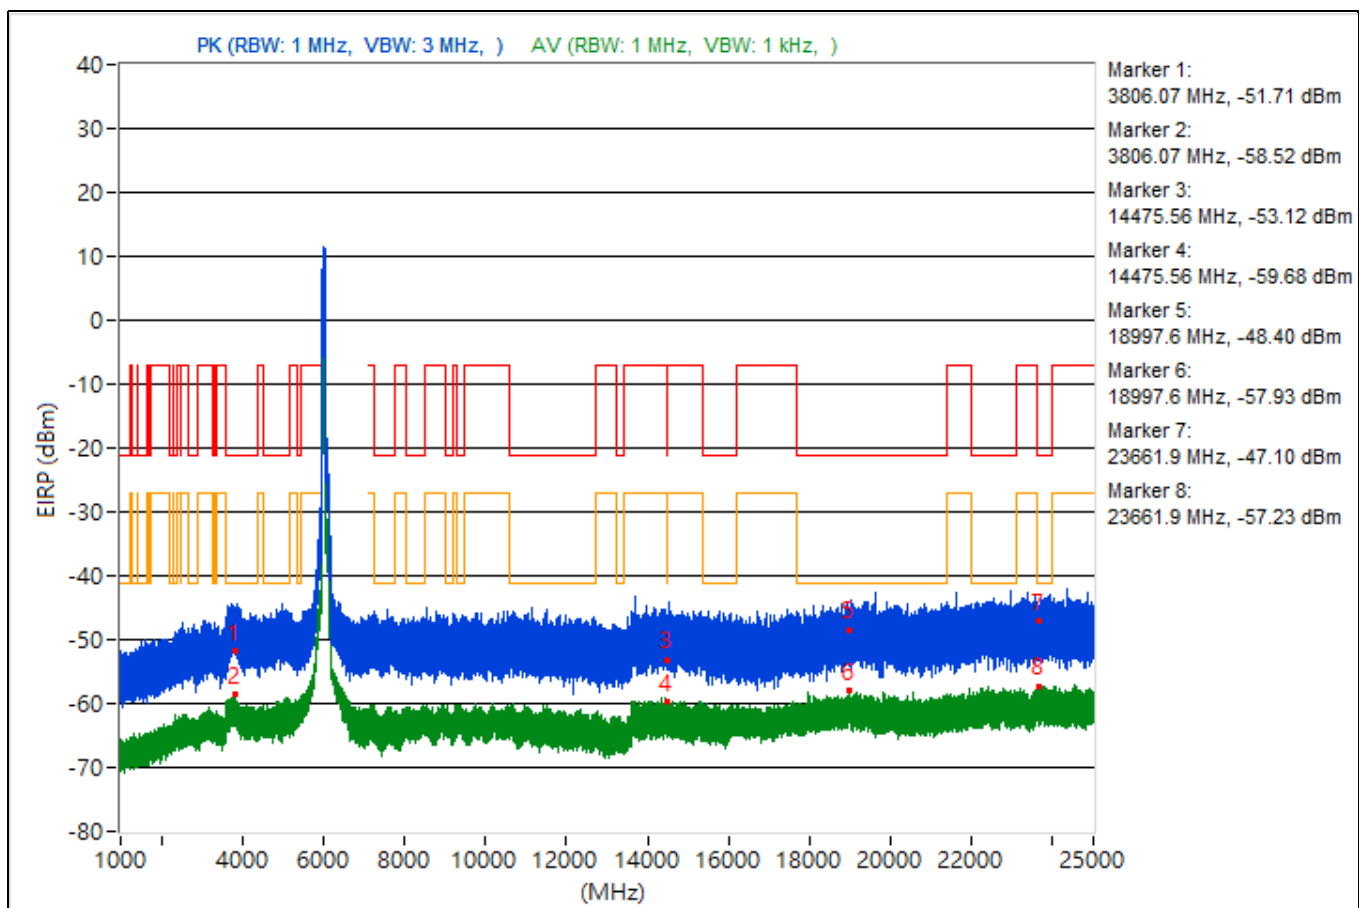


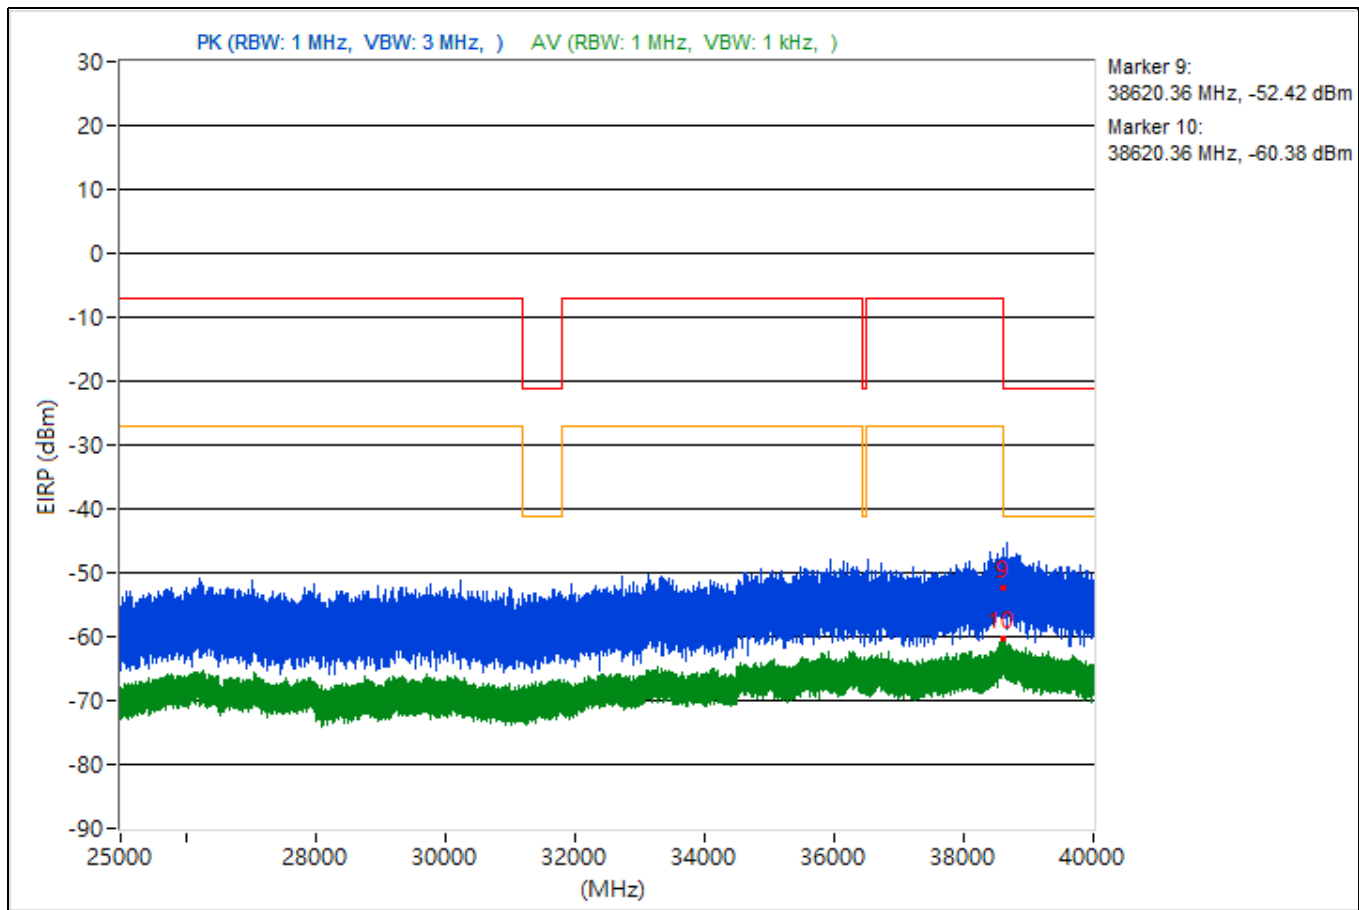


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3831.27	47.84 PK	74	-26.16	-52.34	4.92	-47.42
2	3831.27	37.46 AV	54	-16.54	-62.72	4.92	-57.8
3	15377.51	44.96 PK	74	-29.04	-55.22	4.92	-50.3
4	15377.51	35.86 AV	54	-18.14	-64.32	4.92	-59.4
5	19078	44.35 PK	74	-29.65	-55.83	4.92	-50.91
6	19078	37.26 AV	54	-16.74	-62.92	4.92	-58
7	23771.2	48.5 PK	74	-25.5	-51.68	4.92	-46.76
8	23771.2	37.92 AV	54	-16.08	-62.26	4.92	-57.34
9	38602.67	45.1 PK	74	-28.9	-55.08	4.92	-50.16
10	38602.67	34.37 AV	54	-19.63	-65.81	4.92	-60.89

Note: Margin value = Emission Level - Limit value

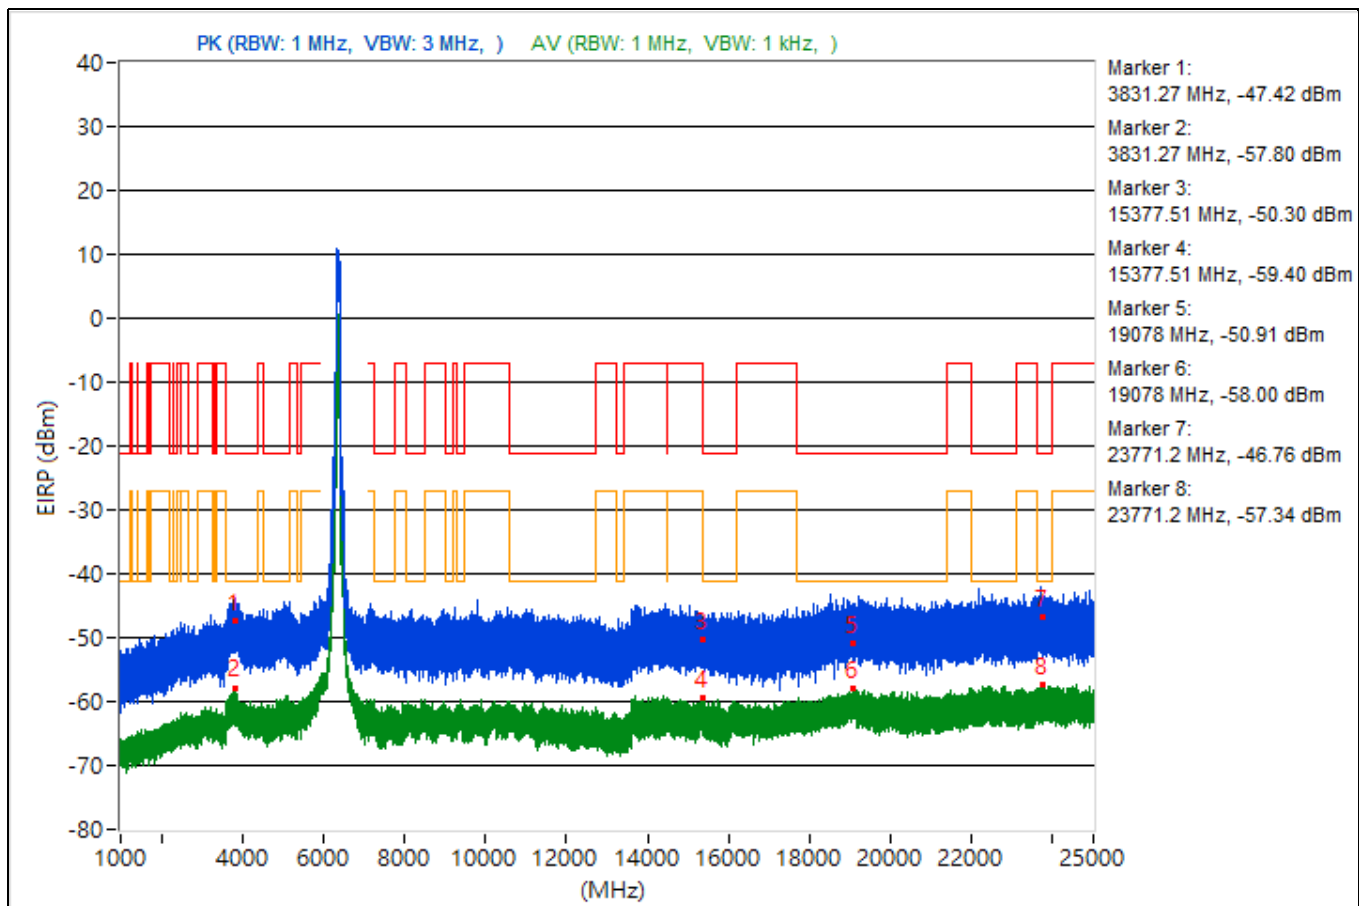


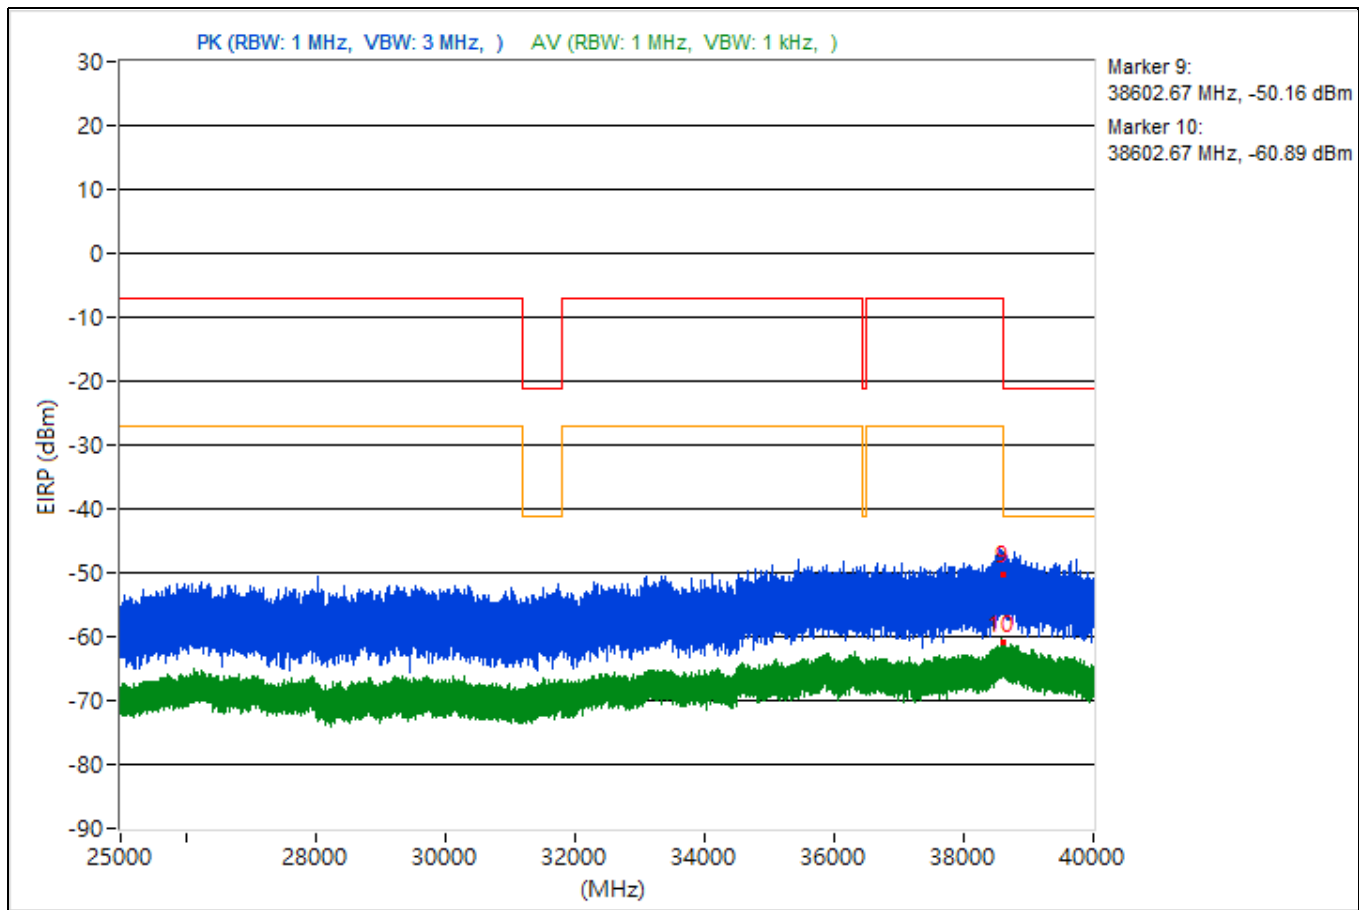


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.99	45.55 PK	74	-28.45	-54.63	4.92	-49.71
2	3805.99	37.05 AV	54	-16.95	-63.13	4.92	-58.21
3	9318.31	42.71 PK	74	-31.29	-57.47	4.92	-52.55
4	9318.31	35.68 AV	54	-18.32	-64.5	4.92	-59.58
5	19443.1	45.43 PK	74	-28.57	-54.75	4.92	-49.83
6	19443.1	37.78 AV	54	-16.22	-62.4	4.92	-57.48
7	23724.3	44.7 PK	74	-29.3	-55.48	4.92	-50.56
8	23724.3	38.65 AV	54	-15.35	-61.53	4.92	-56.61
9	38607.56	43.35 PK	74	-30.65	-56.83	4.92	-51.91
10	38607.56	34.99 AV	54	-19.01	-65.19	4.92	-60.27

Note: Margin value = Emission Level - Limit value

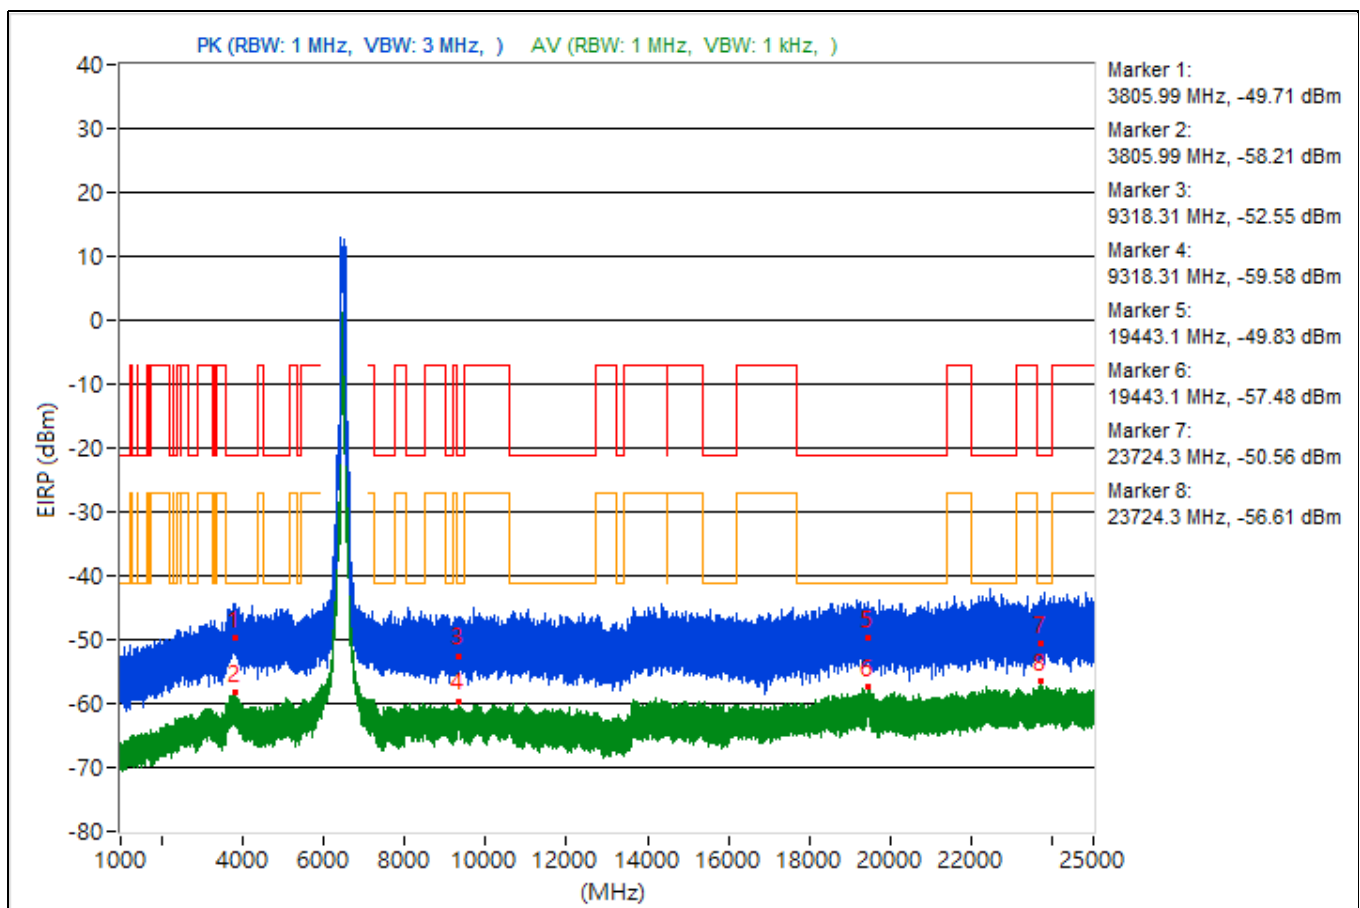


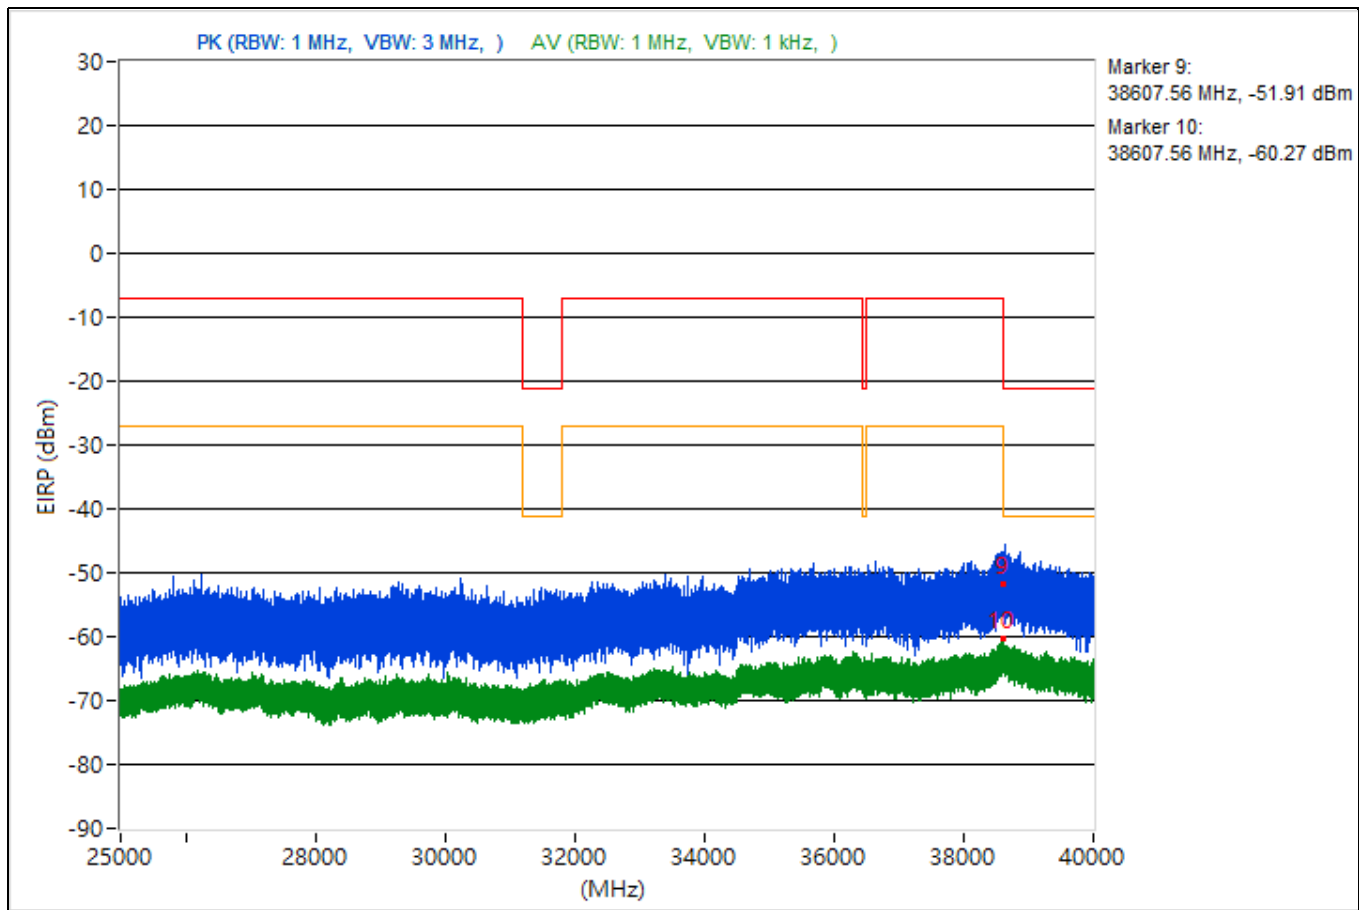


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3710.87	45.09 PK	74	-28.91	-55.09	4.92	-50.17
2	3710.87	37.42 AV	54	-16.58	-62.76	4.92	-57.84
3	10651.91	46.4 PK	74	-27.6	-53.78	4.92	-48.86
4	10651.91	35.64 AV	54	-18.36	-64.54	4.92	-59.62
5	19952.5	44.74 PK	74	-29.26	-55.44	4.92	-50.52
6	19952.5	38.22 AV	54	-15.78	-61.96	4.92	-57.04
7	23775.6	47.79 PK	74	-26.21	-52.39	4.92	-47.47
8	23775.6	38.32 AV	54	-15.68	-61.86	4.92	-56.94
9	38602.67	44.46 PK	74	-29.54	-55.72	4.92	-50.8
10	38602.67	34.24 AV	54	-19.76	-65.94	4.92	-61.02

Note: Margin value = Emission Level - Limit value

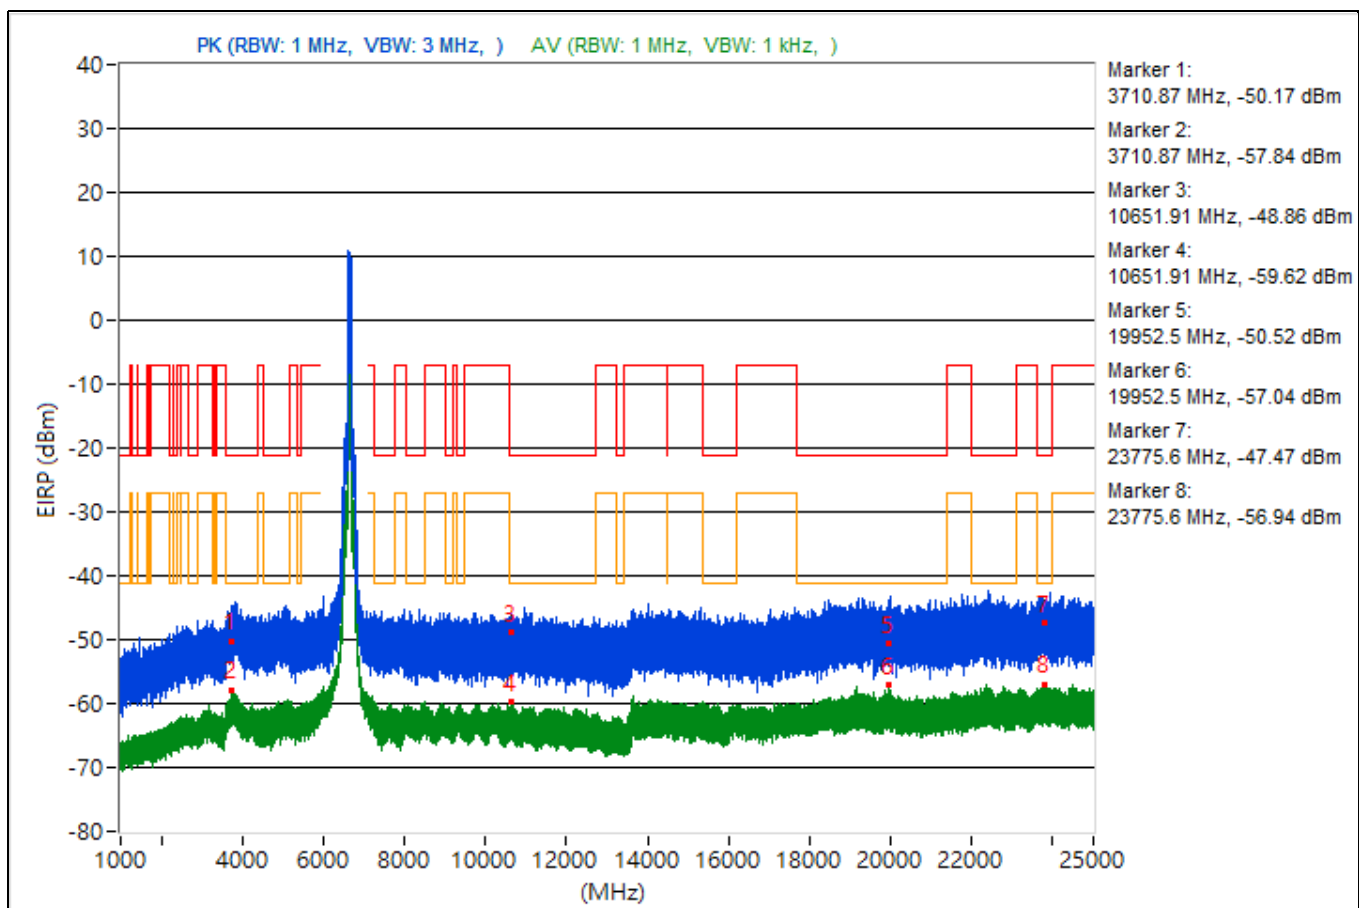


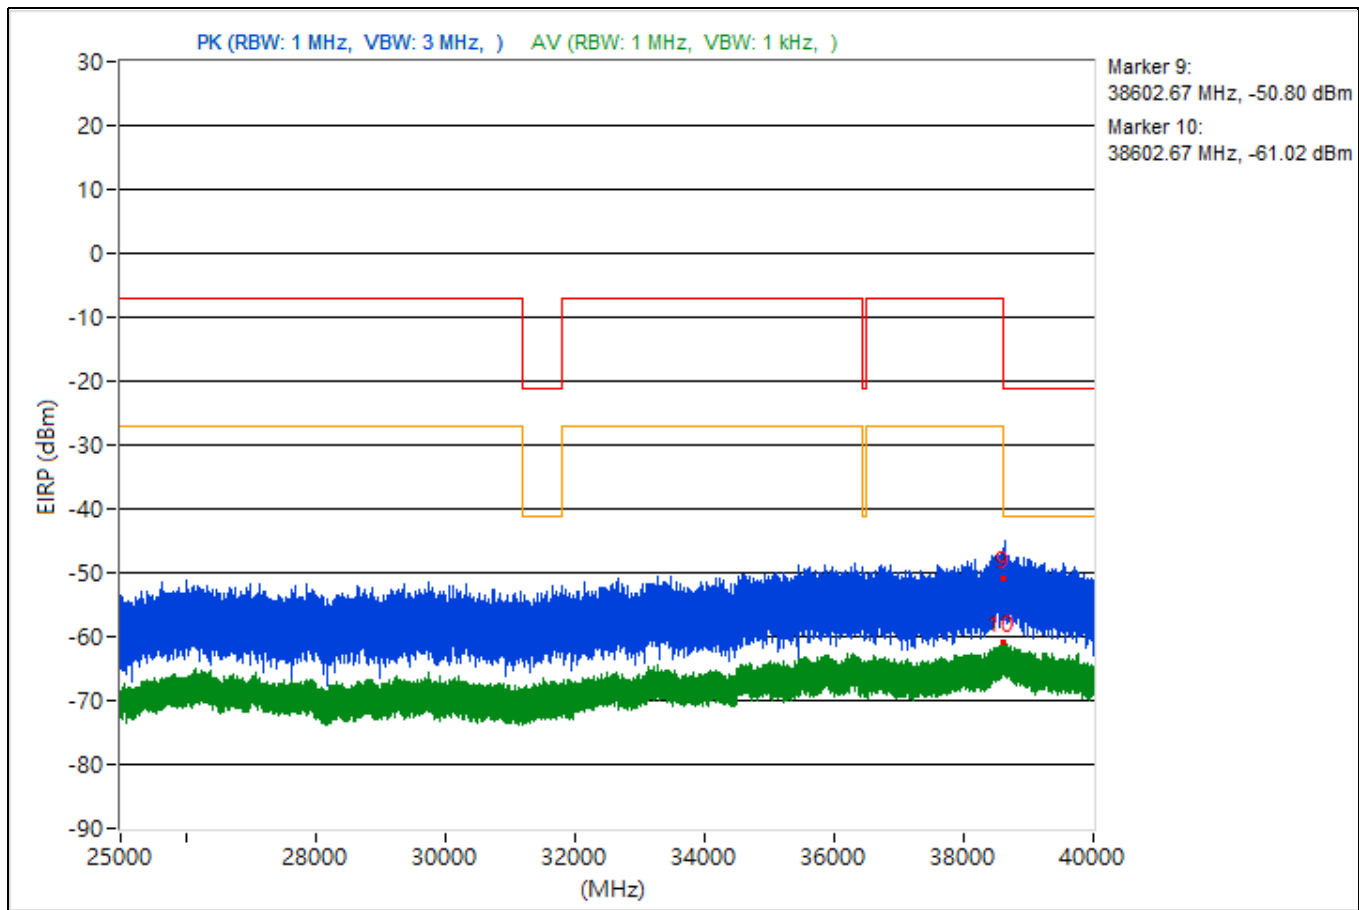


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3778.92	46.1 PK	74	-27.9	-54.08	4.92	-49.16
2	3778.92	36.78 AV	54	-17.22	-63.4	4.92	-58.48
3	7274.1	46.94 PK	74	-27.06	-53.24	4.92	-48.32
4	7274.1	37.06 AV	54	-16.94	-63.12	4.92	-58.2
5	18674.1	48.03 PK	74	-25.97	-52.15	4.92	-47.23
6	18674.1	37.19 AV	54	-16.81	-62.99	4.92	-58.07
7	23914.9	47.03 PK	74	-26.97	-53.15	4.92	-48.23
8	23914.9	37.89 AV	54	-16.11	-62.29	4.92	-57.37
9	38625.42	46.65 PK	74	-27.35	-53.53	4.92	-48.61
10	38625.42	34.49 AV	54	-19.51	-65.69	4.92	-60.77

Note: Margin value = Emission Level - Limit value

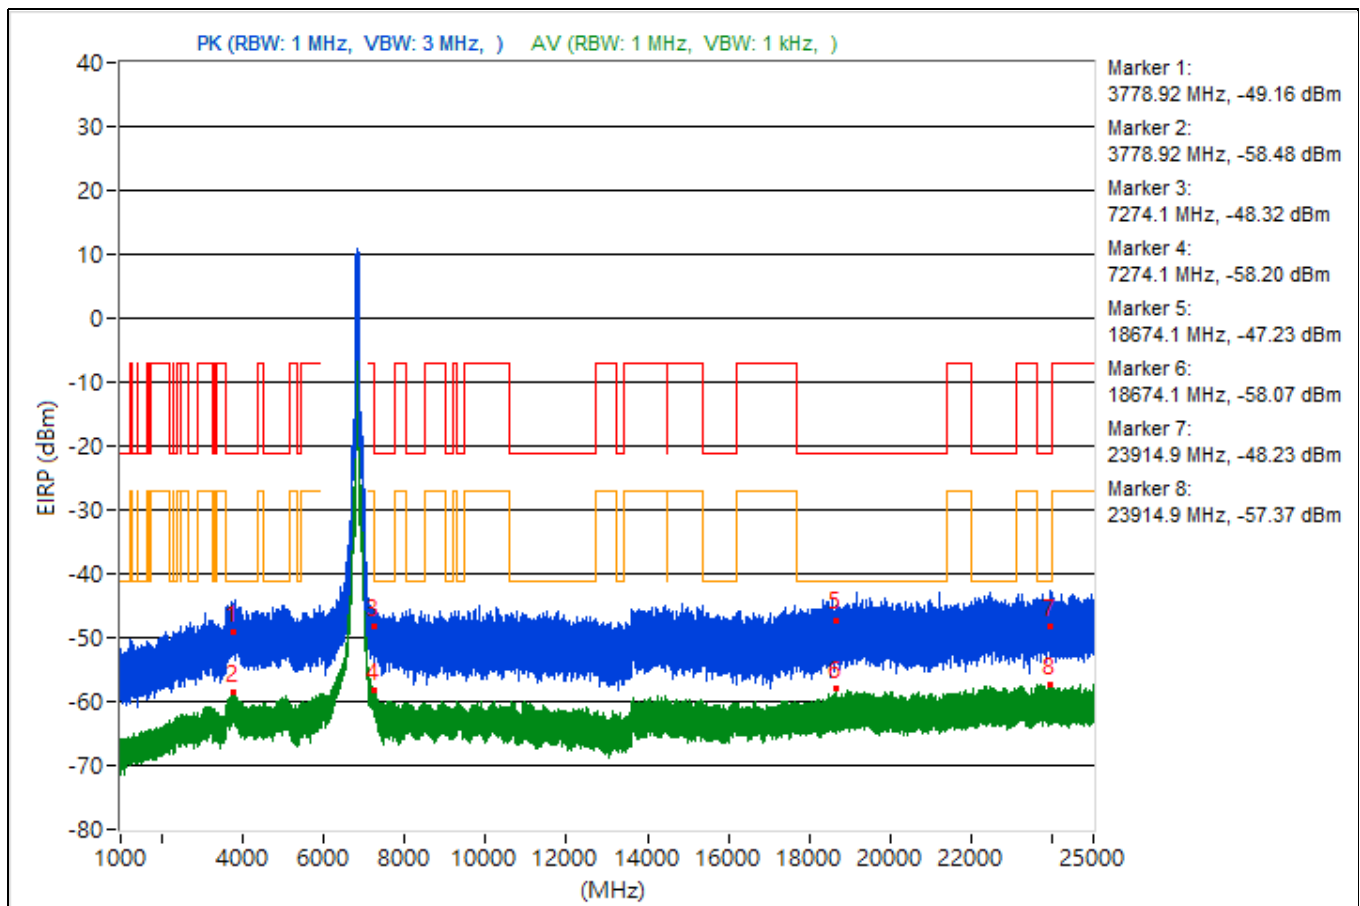


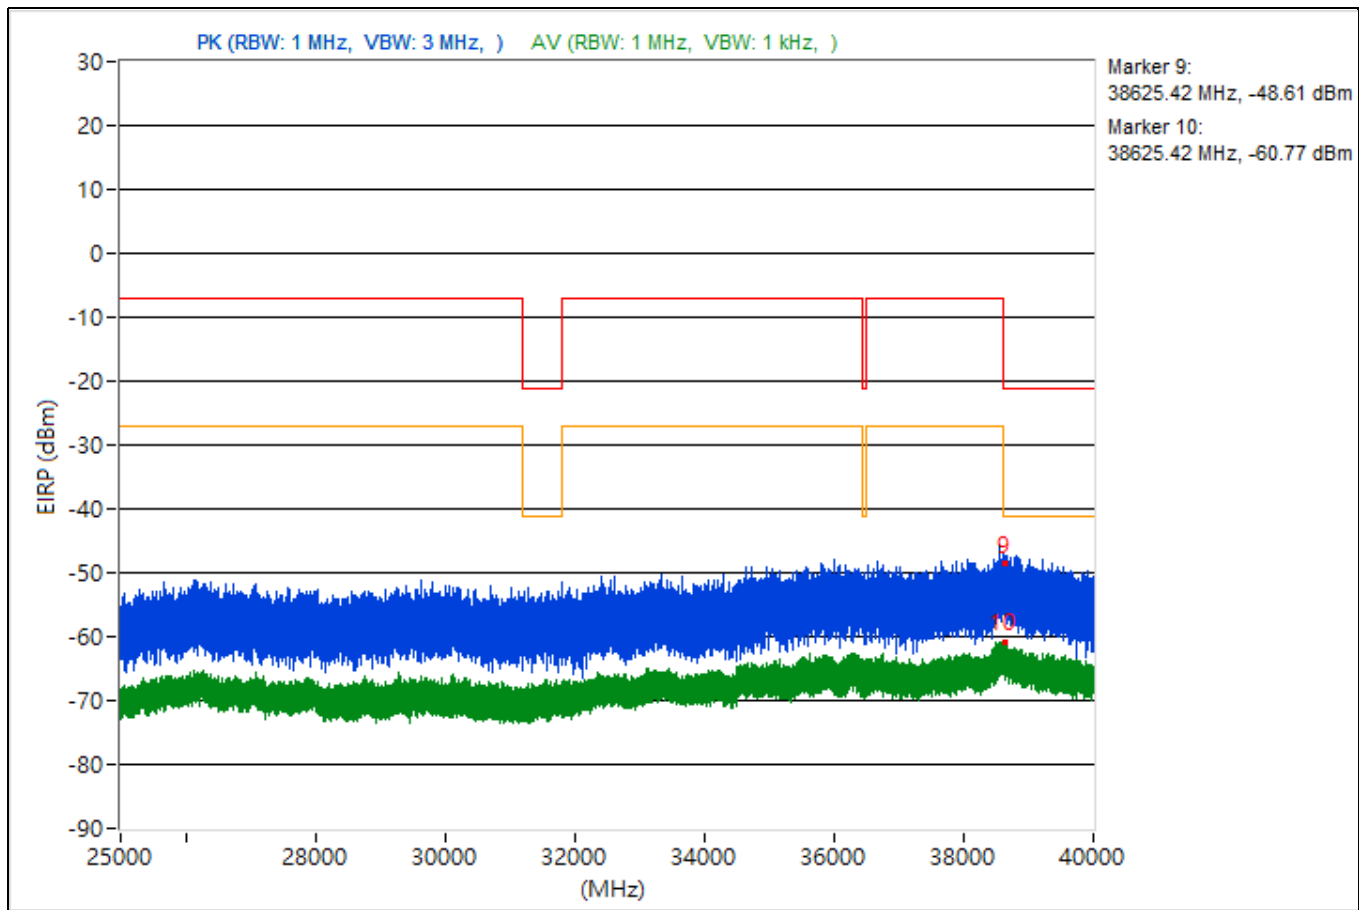


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.16	48.25 PK	74	-25.75	-51.93	4.92	-47.01
2	3828.16	37.17 AV	54	-16.83	-63.01	4.92	-58.09
3	7267.8	48.81 PK	74	-25.19	-51.37	4.92	-46.45
4	7267.8	38.01 AV	54	-15.99	-62.17	4.92	-57.25
5	21047	45.69 PK	74	-28.31	-54.49	4.92	-49.57
6	21047	37.35 AV	54	-16.65	-62.83	4.92	-57.91
7	23699.4	50.11 PK	74	-23.89	-50.07	4.92	-45.15
8	23699.4	37.98 AV	54	-16.02	-62.2	4.92	-57.28
9	38623.02	44.34 PK	74	-29.66	-55.84	4.92	-50.92
10	38623.02	34.51 AV	54	-19.49	-65.67	4.92	-60.75

Note: Margin value = Emission Level - Limit value

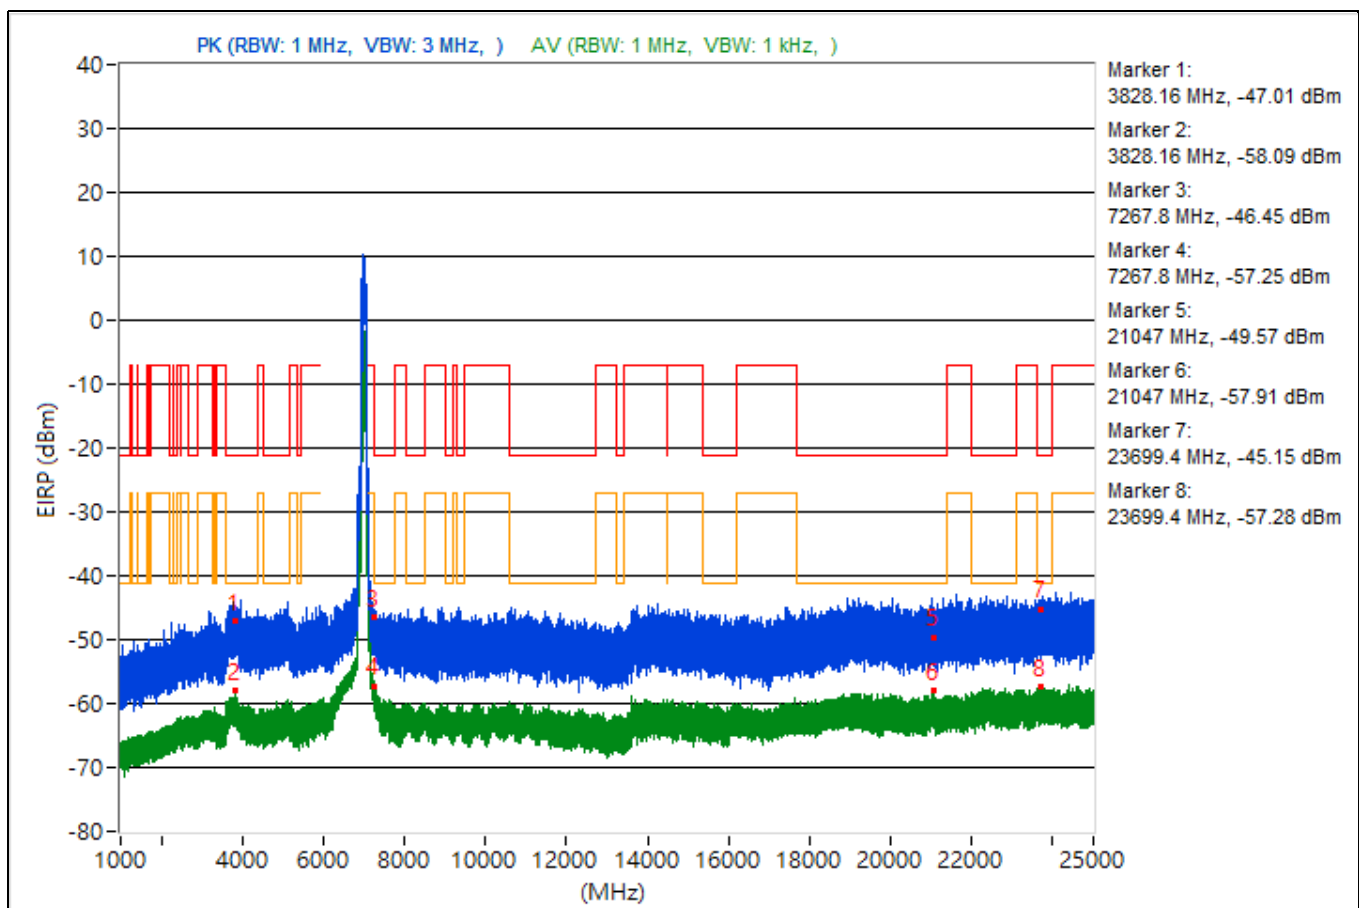


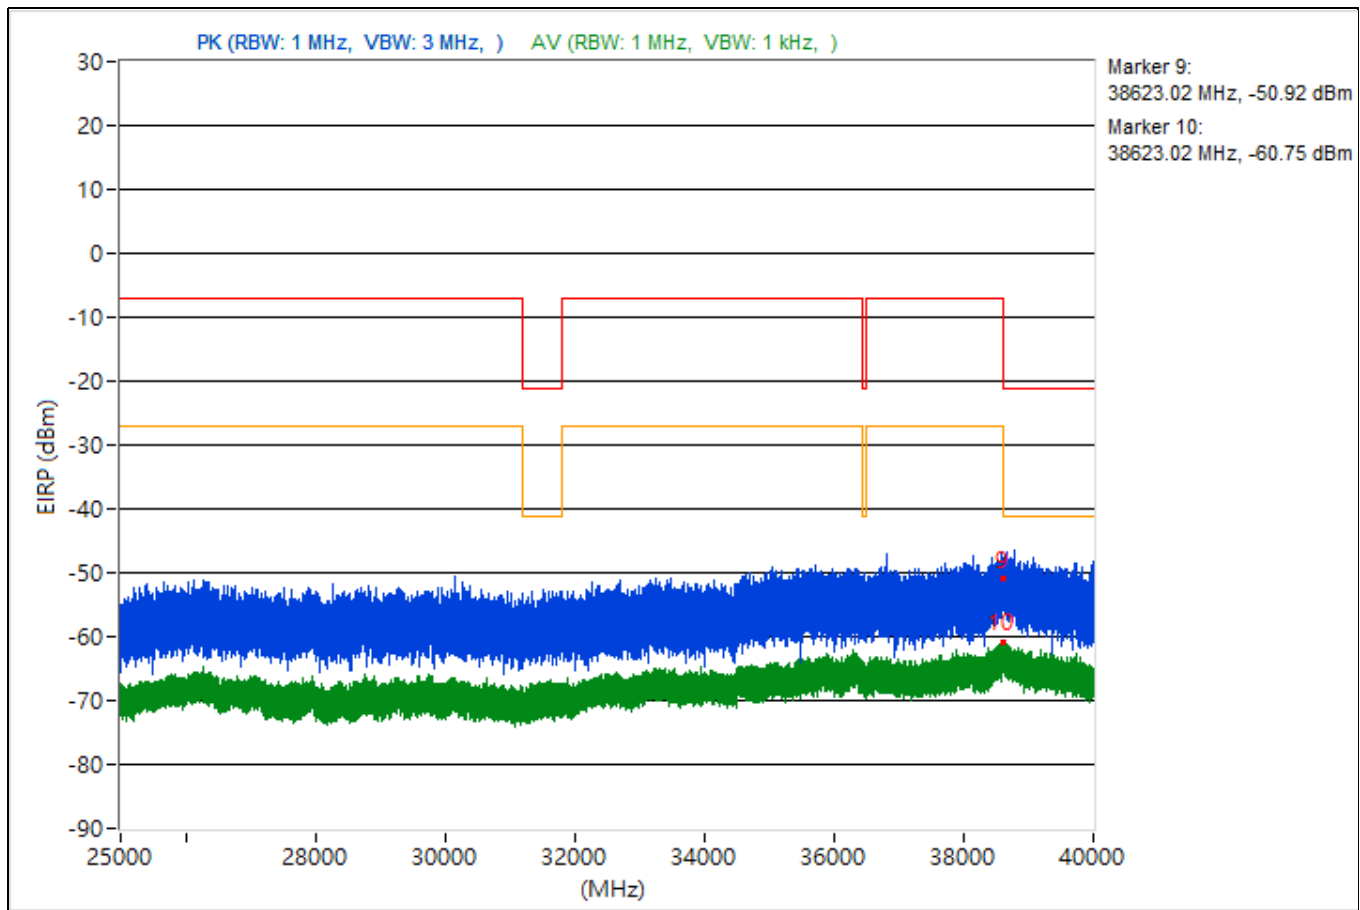


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.97	46.63 PK	74	-27.37	-53.55	4.92	-48.63
2	3810.97	36.82 AV	54	-17.18	-63.36	4.92	-58.44
3	14481.16	43.61 PK	74	-30.39	-56.57	4.92	-51.65
4	14481.16	35.77 AV	54	-18.23	-64.41	4.92	-59.49
5	19104.2	47.09 PK	74	-26.91	-53.09	4.92	-48.17
6	19104.2	37.37 AV	54	-16.63	-62.81	4.92	-57.89
7	23931.3	48.43 PK	74	-25.57	-51.75	4.92	-46.83
8	23931.3	38.1 AV	54	-15.9	-62.08	4.92	-57.16
9	38613.24	44.37 PK	74	-29.63	-55.81	4.92	-50.89
10	38613.24	34.76 AV	54	-19.24	-65.42	4.92	-60.5

Note: Margin value = Emission Level - Limit value

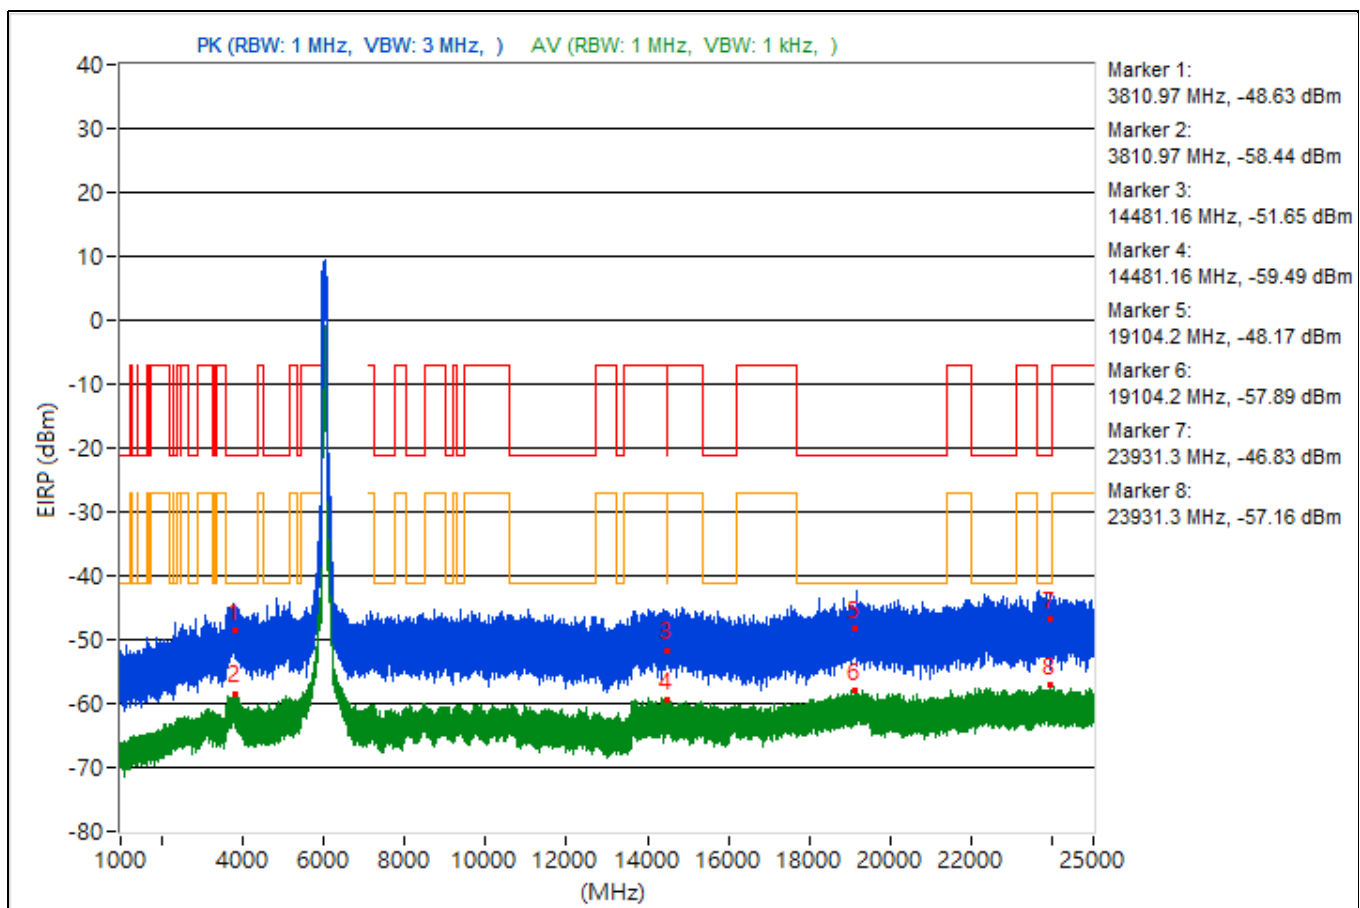


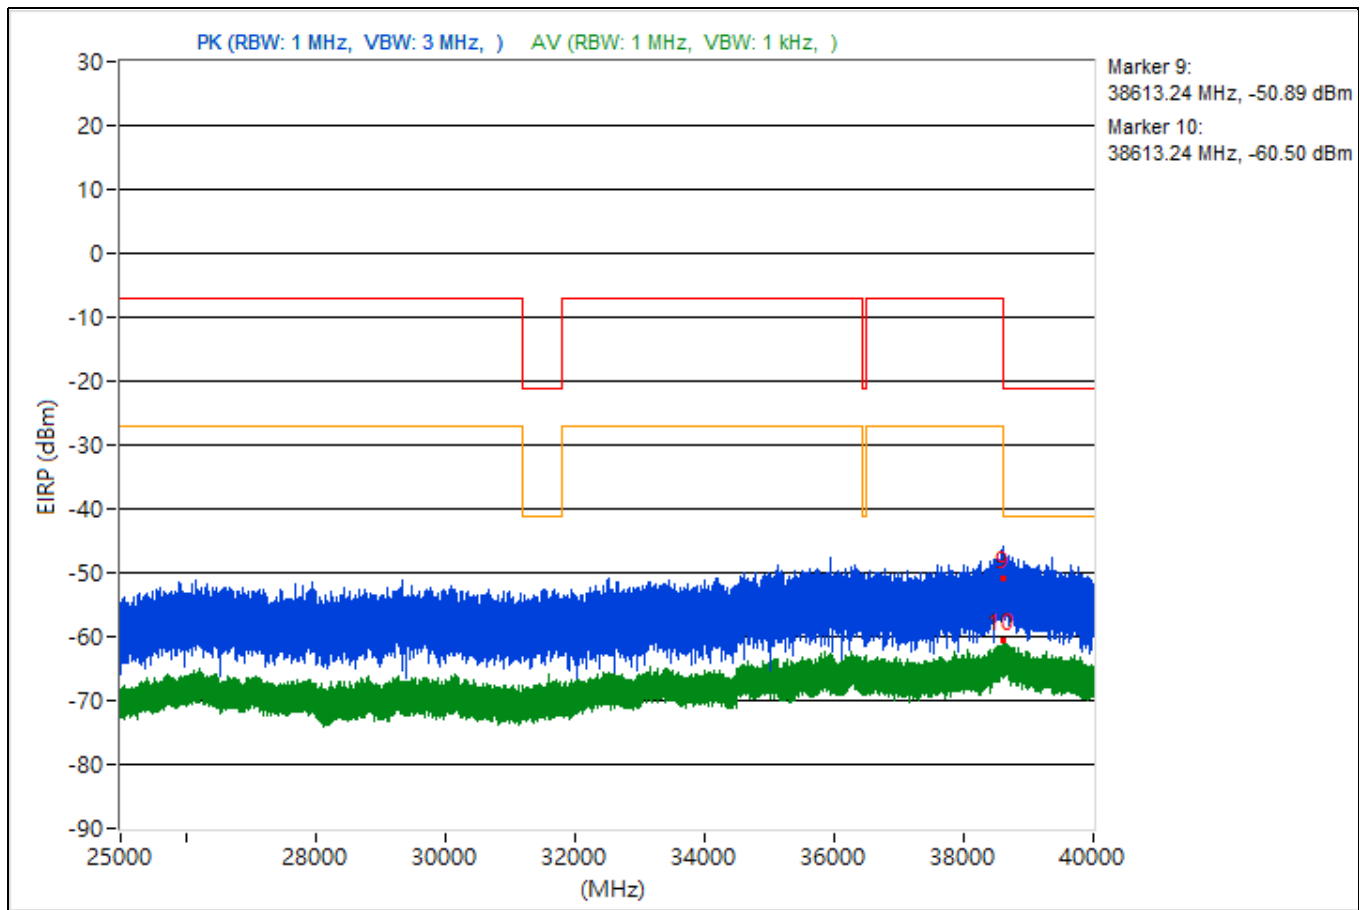


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.62	49.49 PK	74	-24.51	-50.69	4.92	-45.77
2	3772.62	36.89 AV	54	-17.11	-63.29	4.92	-58.37
3	14479.47	43.7 PK	74	-30.3	-56.48	4.92	-51.56
4	14479.47	35.78 AV	54	-18.22	-64.4	4.92	-59.48
5	19075.7	46.49 PK	74	-27.51	-53.69	4.92	-48.77
6	19075.7	37.18 AV	54	-16.82	-63	4.92	-58.08
7	22365.3	50.03 PK	74	-23.97	-50.15	4.92	-45.23
8	22365.3	38.12 AV	54	-15.88	-62.06	4.92	-57.14
9	38724.36	43.23 PK	74	-30.77	-56.95	4.92	-52.03
10	38724.36	34.29 AV	54	-19.71	-65.89	4.92	-60.97

Note: Margin value = Emission Level - Limit value

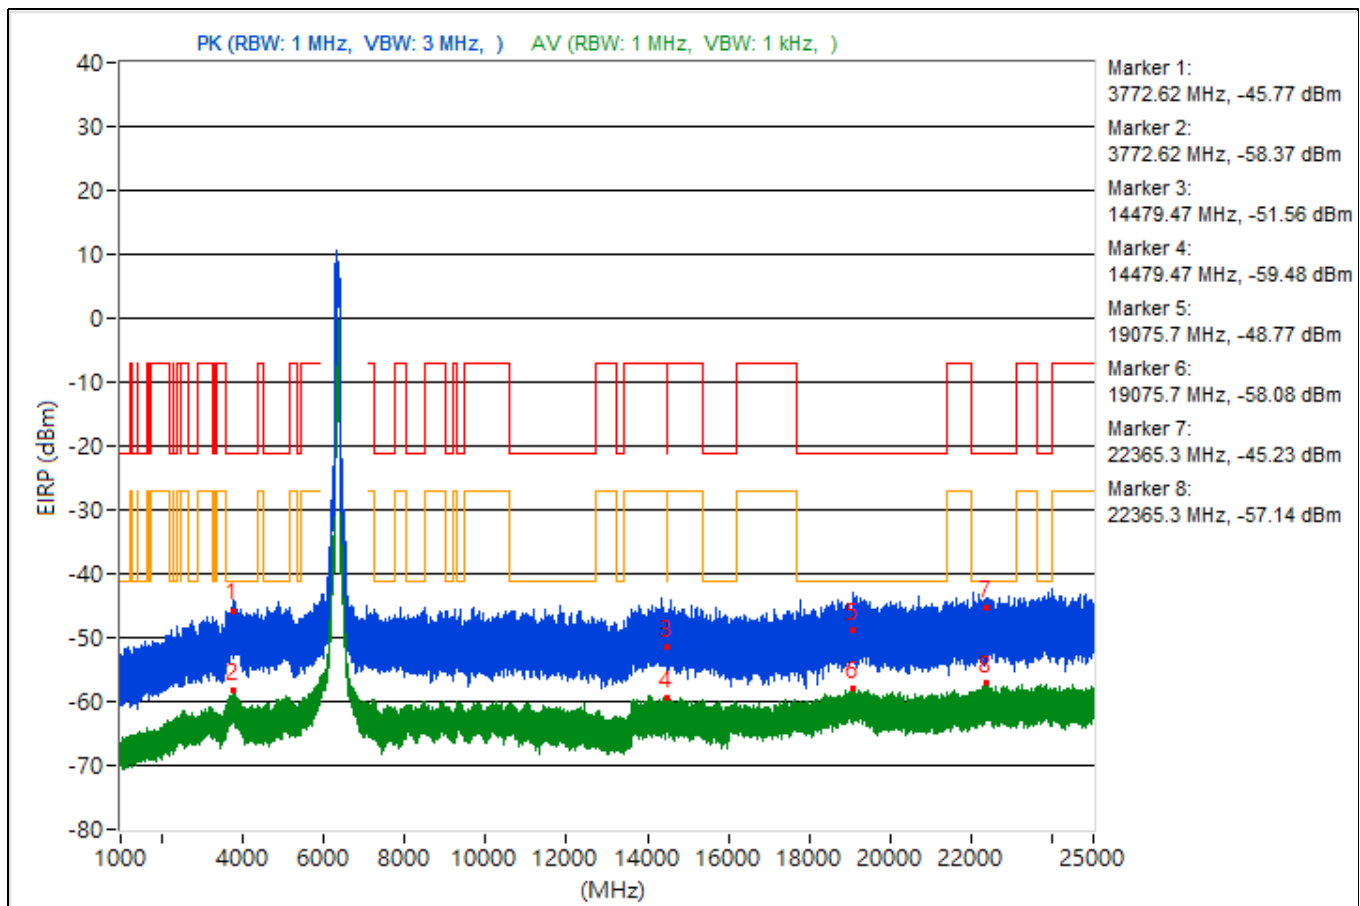


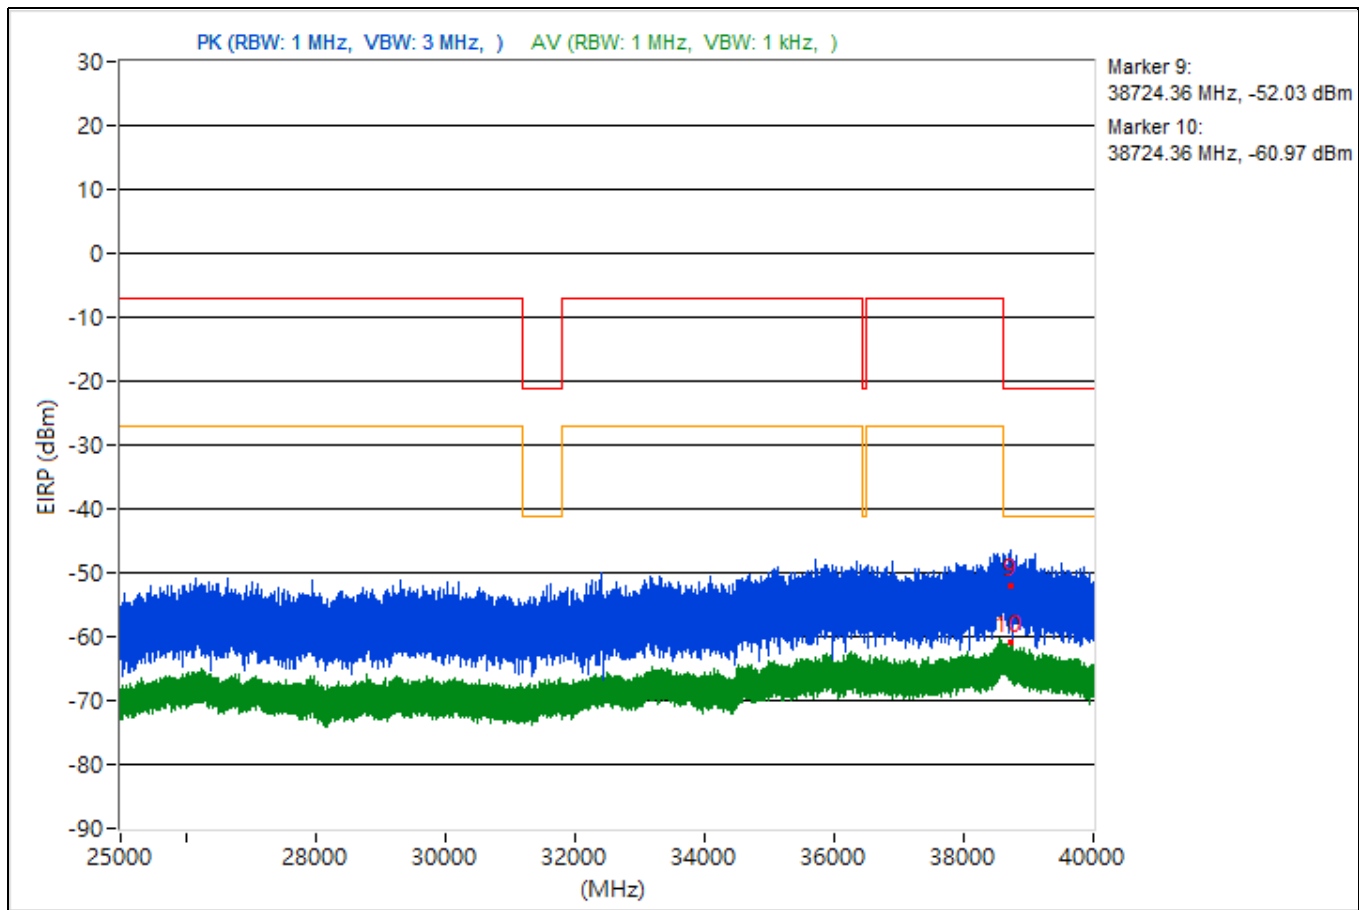


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3753.96	45.95 PK	74	-28.05	-54.23	4.92	-49.31
2	3753.96	37.14 AV	54	-16.86	-63.04	4.92	-58.12
3	14471.38	46.86 PK	74	-27.14	-53.32	4.92	-48.4
4	14471.38	35.73 AV	54	-18.27	-64.45	4.92	-59.53
5	19243	48.03 PK	74	-25.97	-52.15	4.92	-47.23
6	19243	37.02 AV	54	-16.98	-63.16	4.92	-58.24
7	22468.6	44.31 PK	74	-29.69	-55.87	4.92	-50.95
8	22468.6	38.27 AV	54	-15.73	-61.91	4.92	-56.99
9	38662.93	44.58 PK	74	-29.42	-55.6	4.92	-50.68
10	38662.93	34.3 AV	54	-19.7	-65.88	4.92	-60.96

Note: Margin value = Emission Level - Limit value

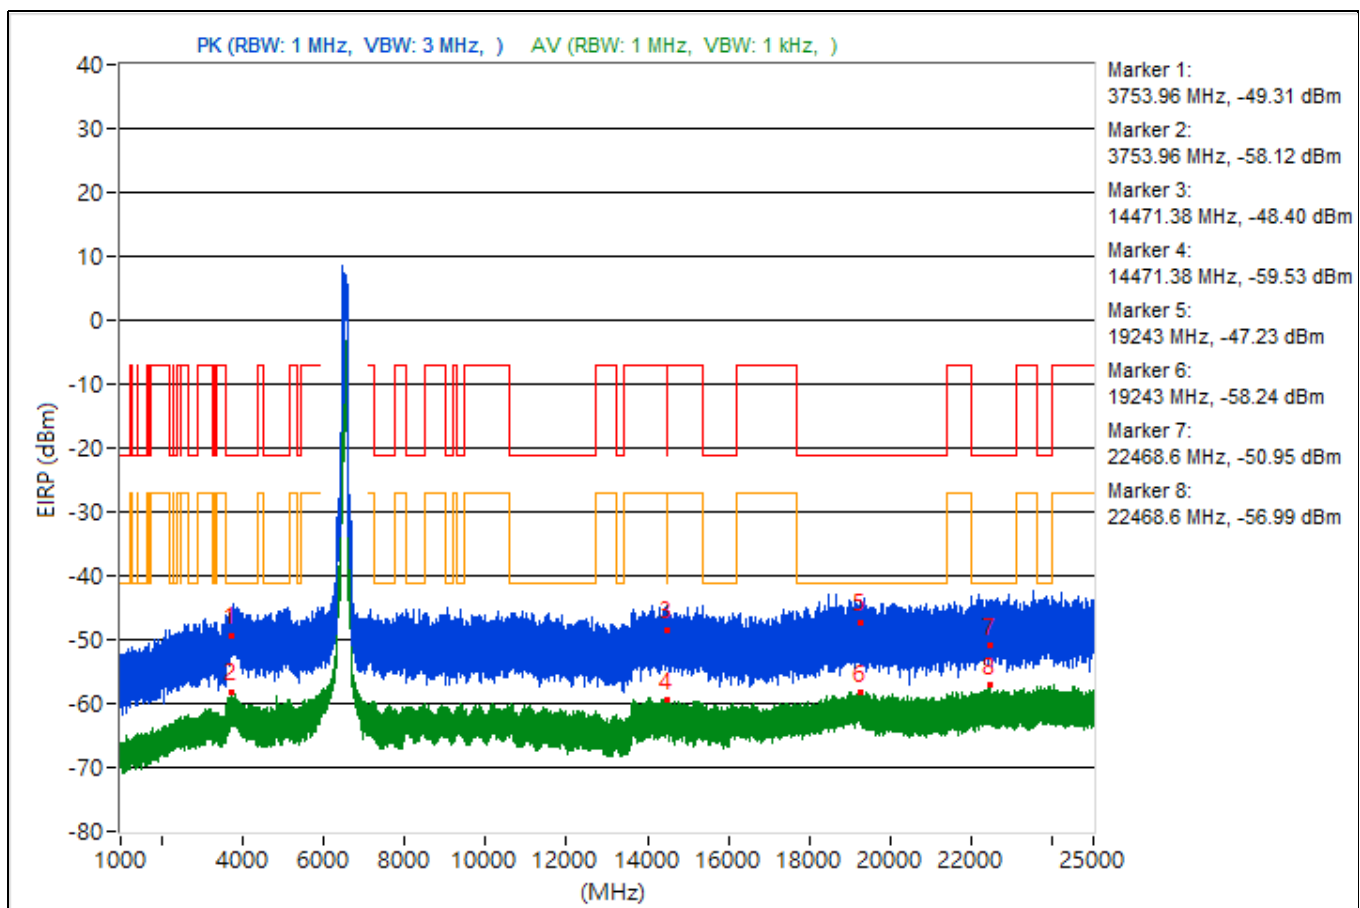


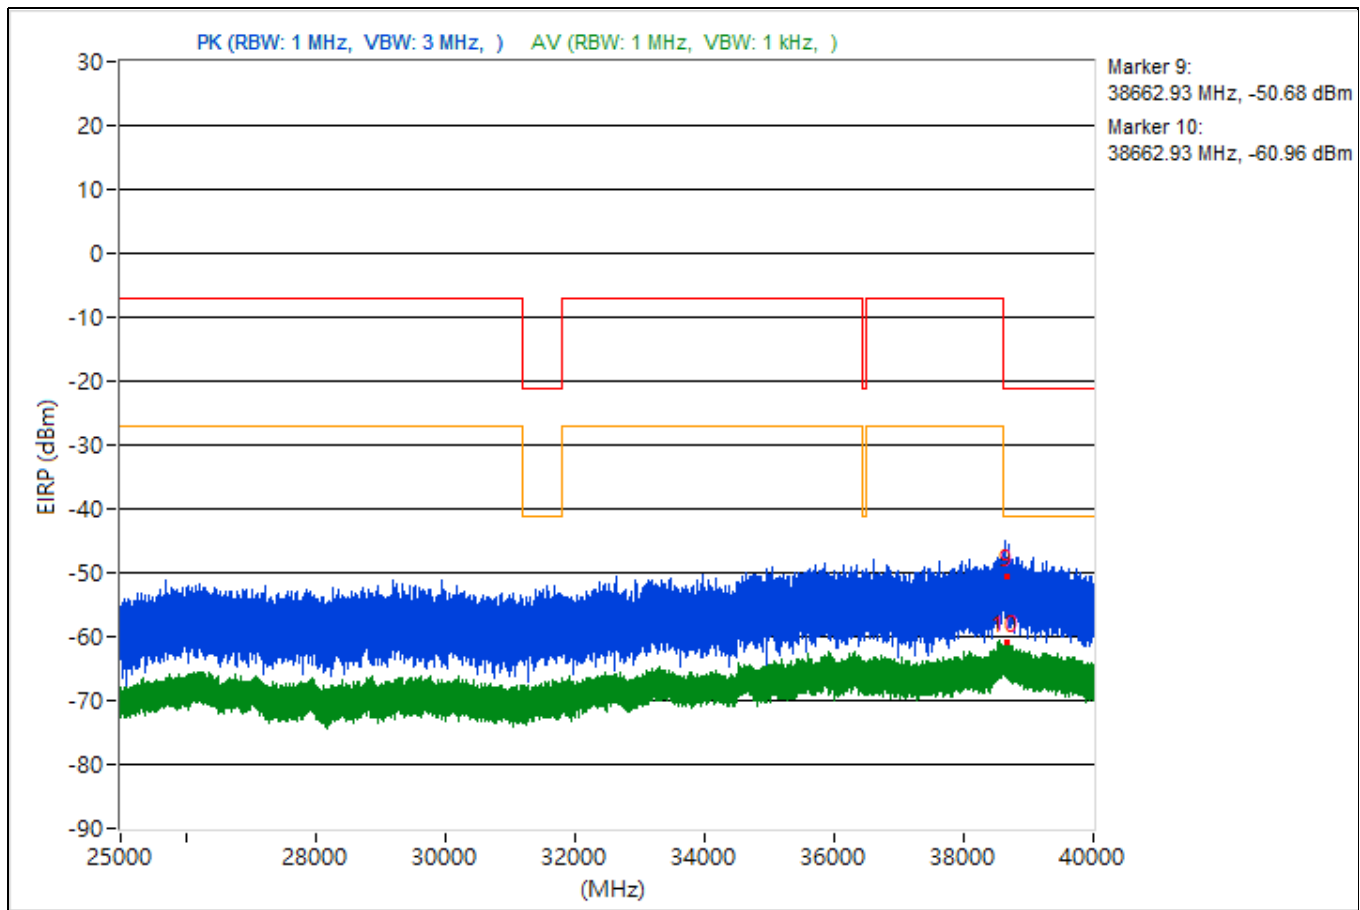


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.97	45.33 PK	74	-28.67	-54.85	4.92	-49.93
2	3817.97	37.21 AV	54	-16.79	-62.97	4.92	-58.05
3	7275.5	45.28 PK	74	-28.72	-54.9	4.92	-49.98
4	7275.5	35.68 AV	54	-18.32	-64.5	4.92	-59.58
5	19339.4	49.84 PK	74	-24.16	-50.34	4.92	-45.42
6	19339.4	37.22 AV	54	-16.78	-62.96	4.92	-58.04
7	23607	47.36 PK	74	-26.64	-52.82	4.92	-47.9
8	23607	37.87 AV	54	-16.13	-62.31	4.92	-57.39
9	38602.13	45.13 PK	74	-28.87	-55.05	4.92	-50.13
10	38602.13	34.43 AV	54	-19.57	-65.75	4.92	-60.83

Note: Margin value = Emission Level - Limit value

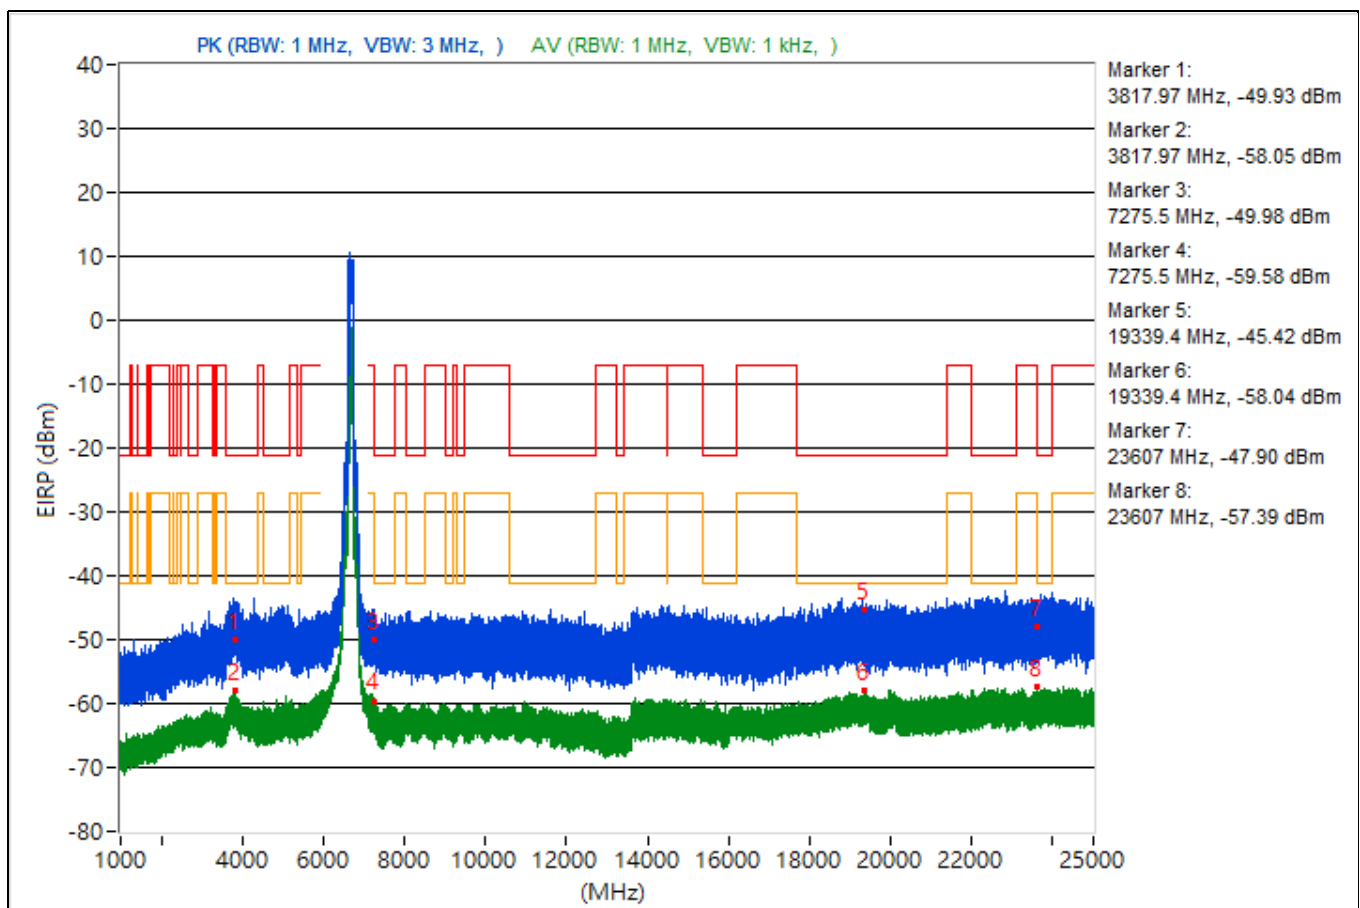


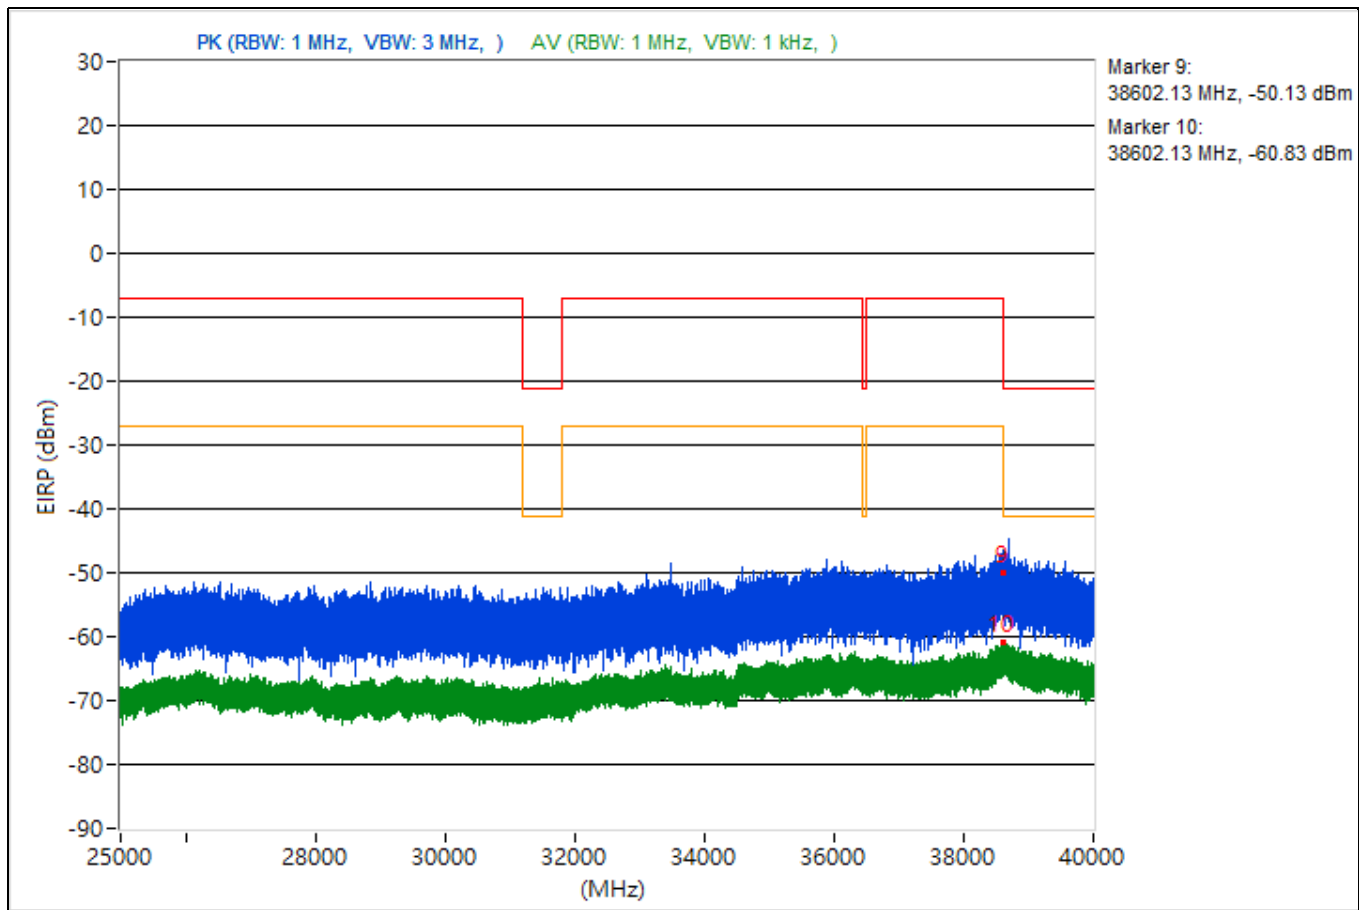


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.28	46.74 PK	74	-27.26	-53.44	4.92	-48.52
2	3825.28	36.93 AV	54	-17.07	-63.25	4.92	-58.33
3	7284.21	42.73 PK	74	-31.27	-57.45	4.92	-52.53
4	7284.21	36.86 AV	54	-17.14	-63.32	4.92	-58.4
5	19243.8	47.57 PK	74	-26.43	-52.61	4.92	-47.69
6	19243.8	37.38 AV	54	-16.62	-62.8	4.92	-57.88
7	23795.6	44.41 PK	74	-29.59	-55.77	4.92	-50.85
8	23795.6	38.95 AV	54	-15.05	-61.23	4.92	-56.31
9	38615.2	46.56 PK	74	-27.44	-53.62	4.92	-48.7
10	38615.2	34.68 AV	54	-19.32	-65.5	4.92	-60.58

Note: Margin value = Emission Level - Limit value

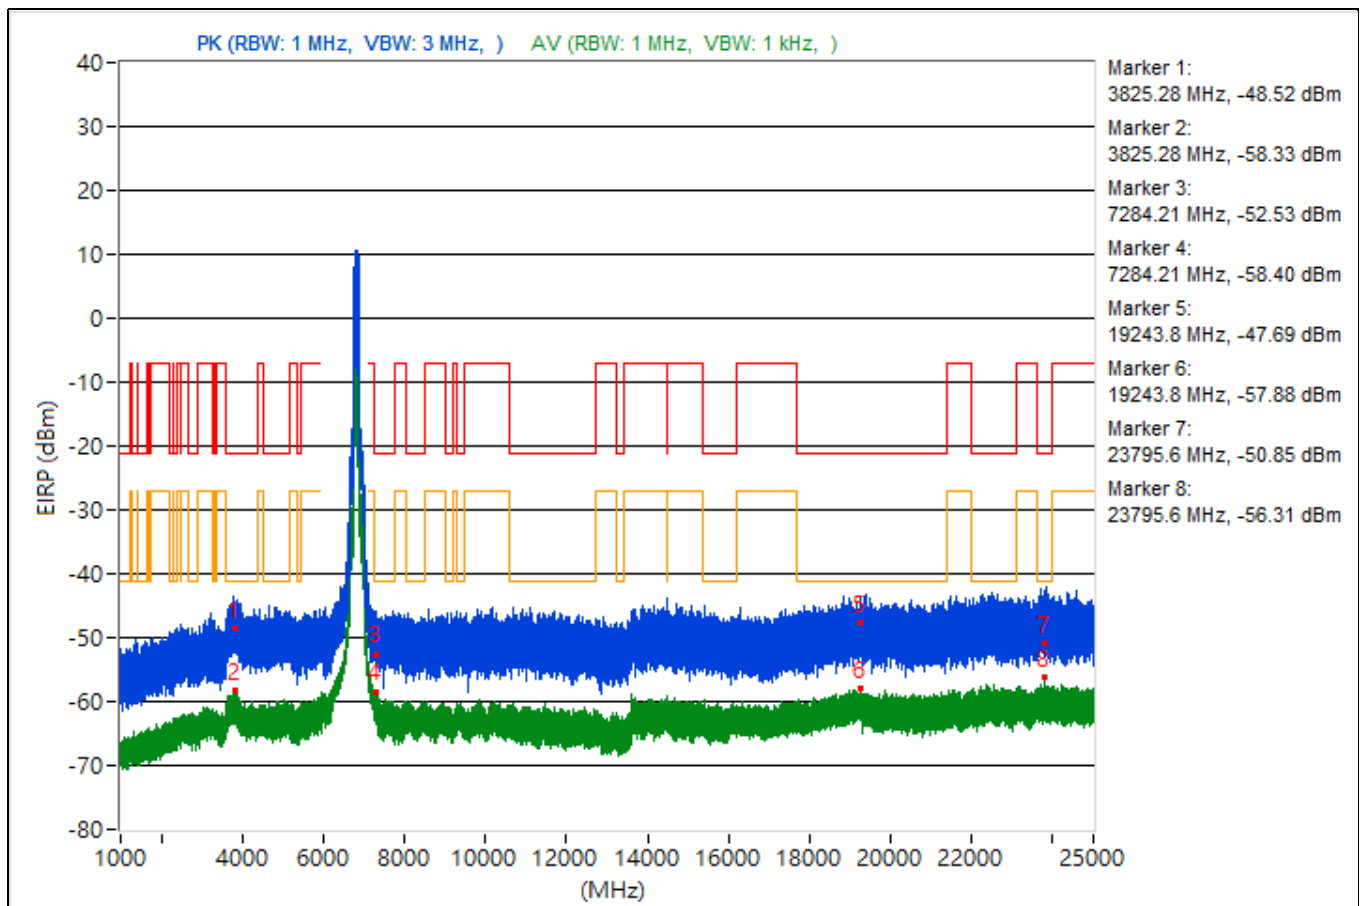


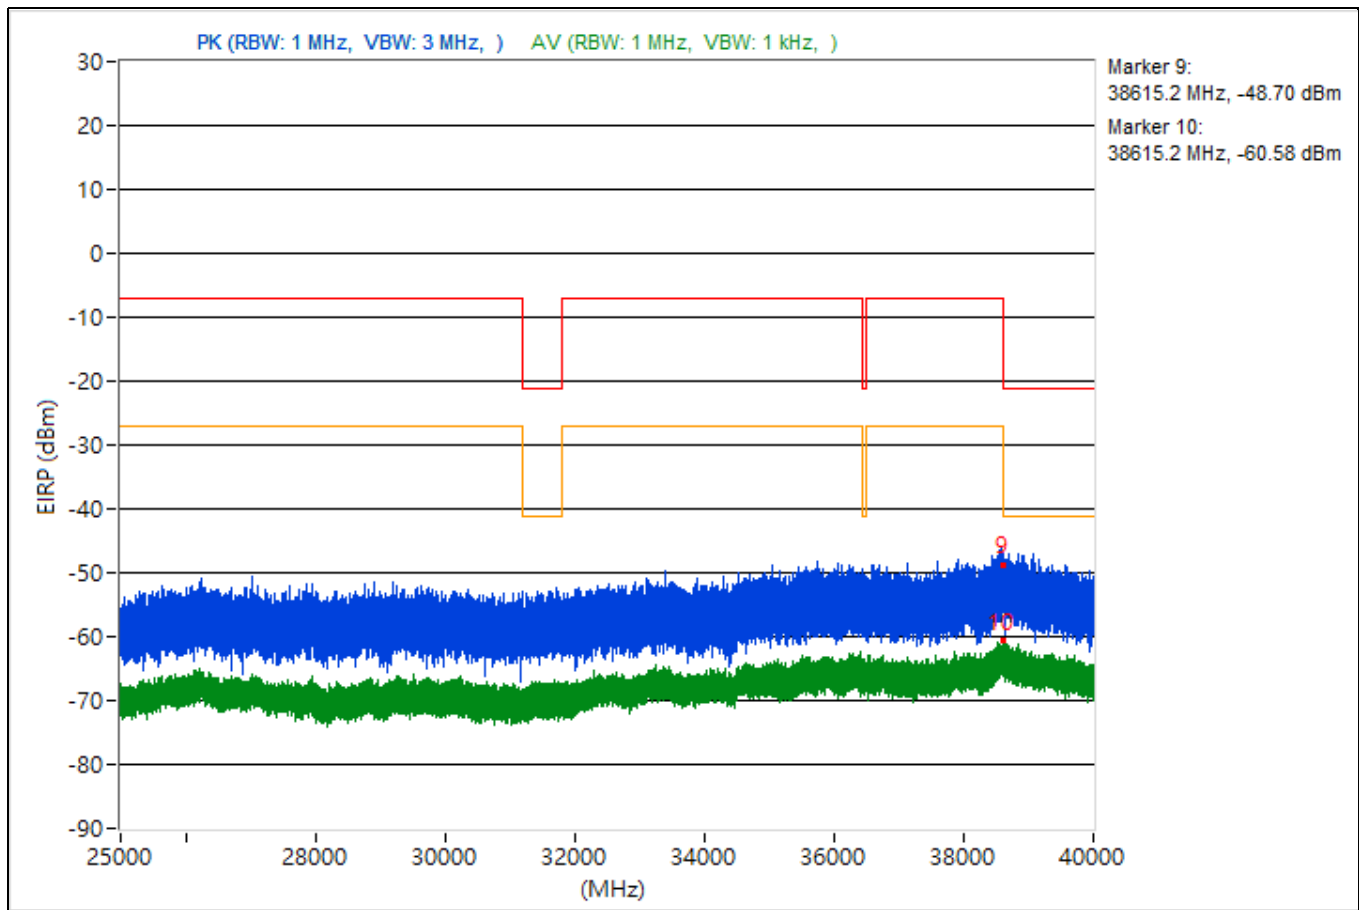


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.48	47.22 PK	74	-26.78	-52.96	4.92	-48.04
2	3787.48	36.74 AV	54	-17.26	-63.44	4.92	-58.52
3	7252.71	49.4 PK	74	-24.6	-50.78	4.92	-45.86
4	7252.71	38.96 AV	54	-15.04	-61.22	4.92	-56.3
5	19170.2	45.38 PK	74	-28.62	-54.8	4.92	-49.88
6	19170.2	37.54 AV	54	-16.46	-62.64	4.92	-57.72
7	23706.3	43.64 PK	74	-30.36	-56.54	4.92	-51.62
8	23706.3	38.31 AV	54	-15.69	-61.87	4.92	-56.95
9	38622.93	40.58 PK	74	-33.42	-59.6	4.92	-54.68
10	38622.93	34.16 AV	54	-19.84	-66.02	4.92	-61.1

Note: Margin value = Emission Level - Limit value

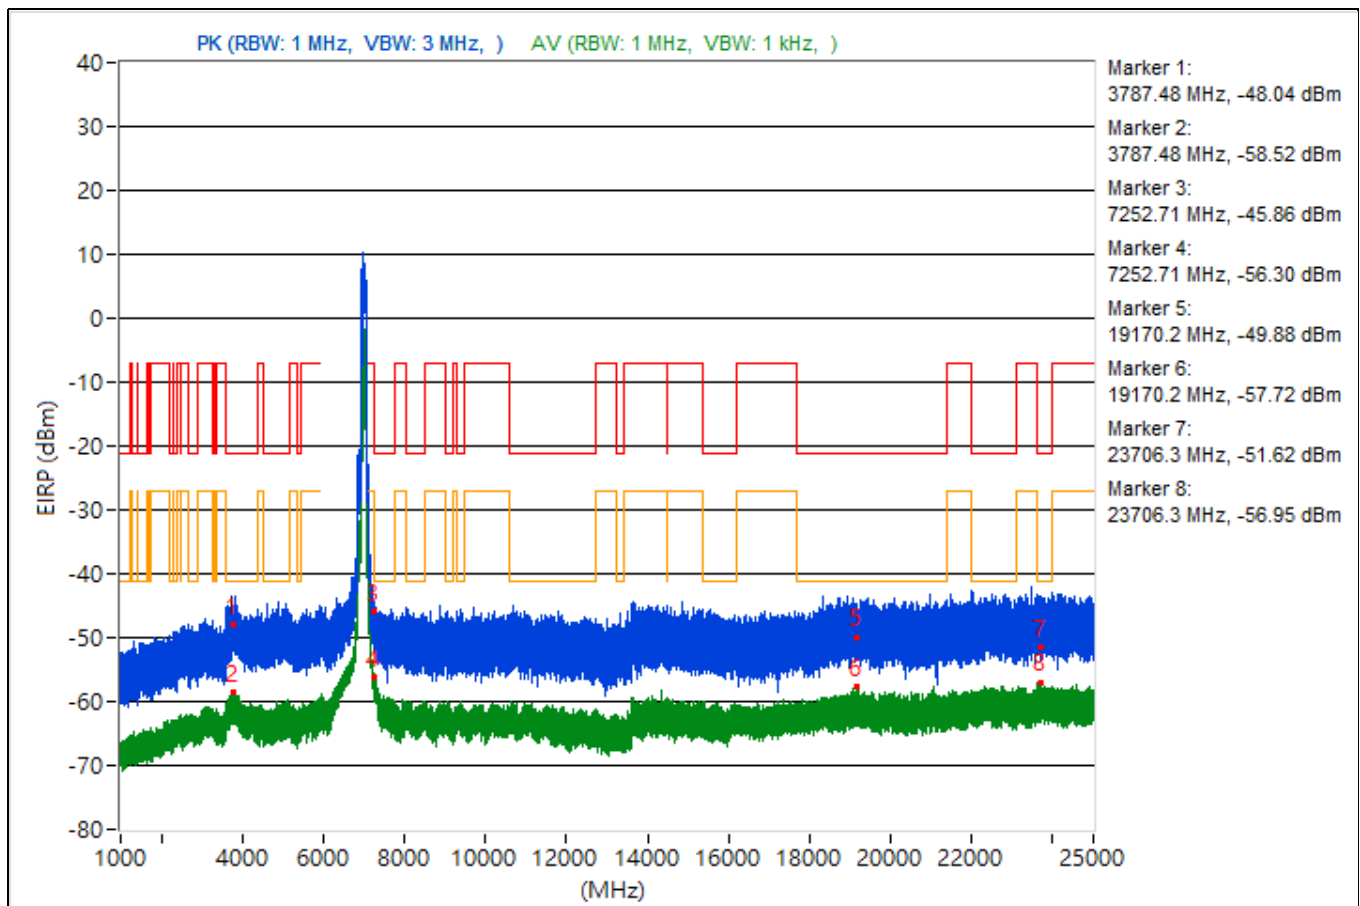

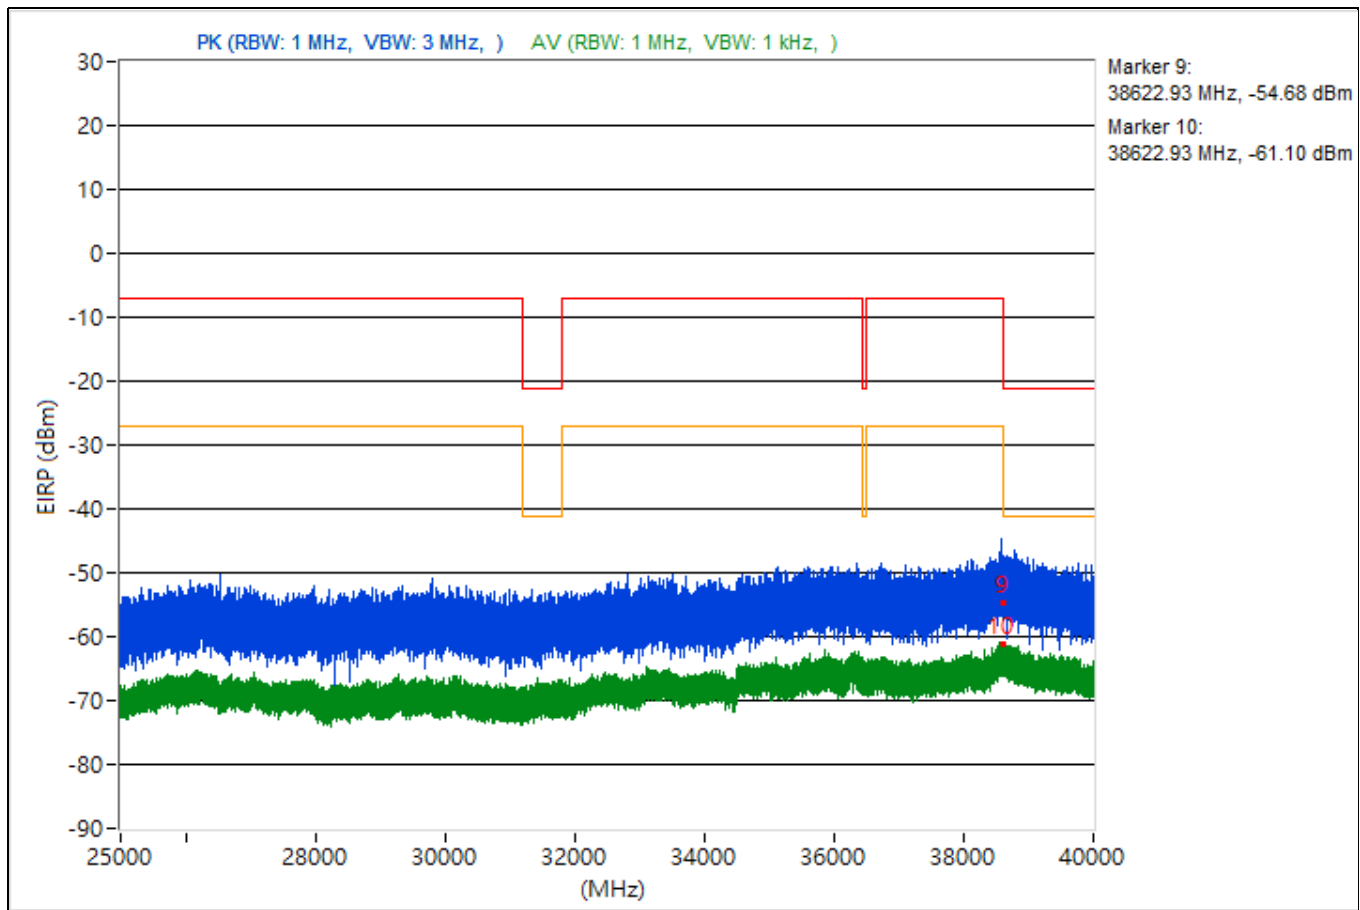


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.5	100.79 PK			0.77	4.76	5.53
2	*5933.5	93.22 AV			-6.8	4.76	-2.04
3	#5924.98	73.22 PK	88.26	-15.04	-26.8	4.76	-22.04
4	#5924.98	53.96 AV	68.26	-14.3	-46.06	4.76	-41.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

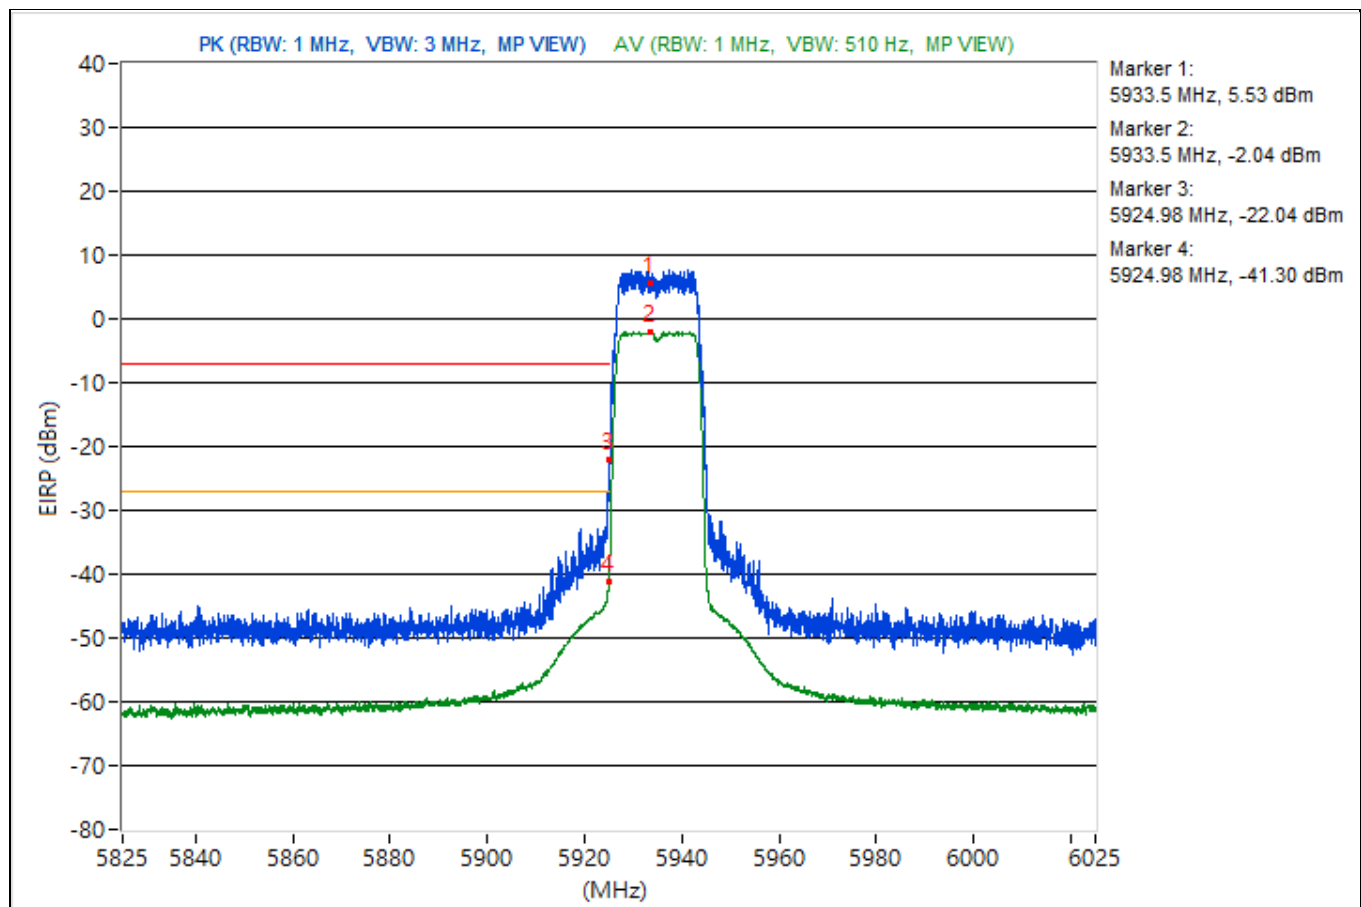


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.1	102.06 PK			2.04	4.76	6.8
2	*5956.1	94.58 AV			-5.44	4.76	-0.68
3	#5922.93	53.71 PK	88.26	-34.55	-46.31	4.76	-41.55
4	#5922.93	44.57 AV	68.26	-23.69	-55.45	4.76	-50.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

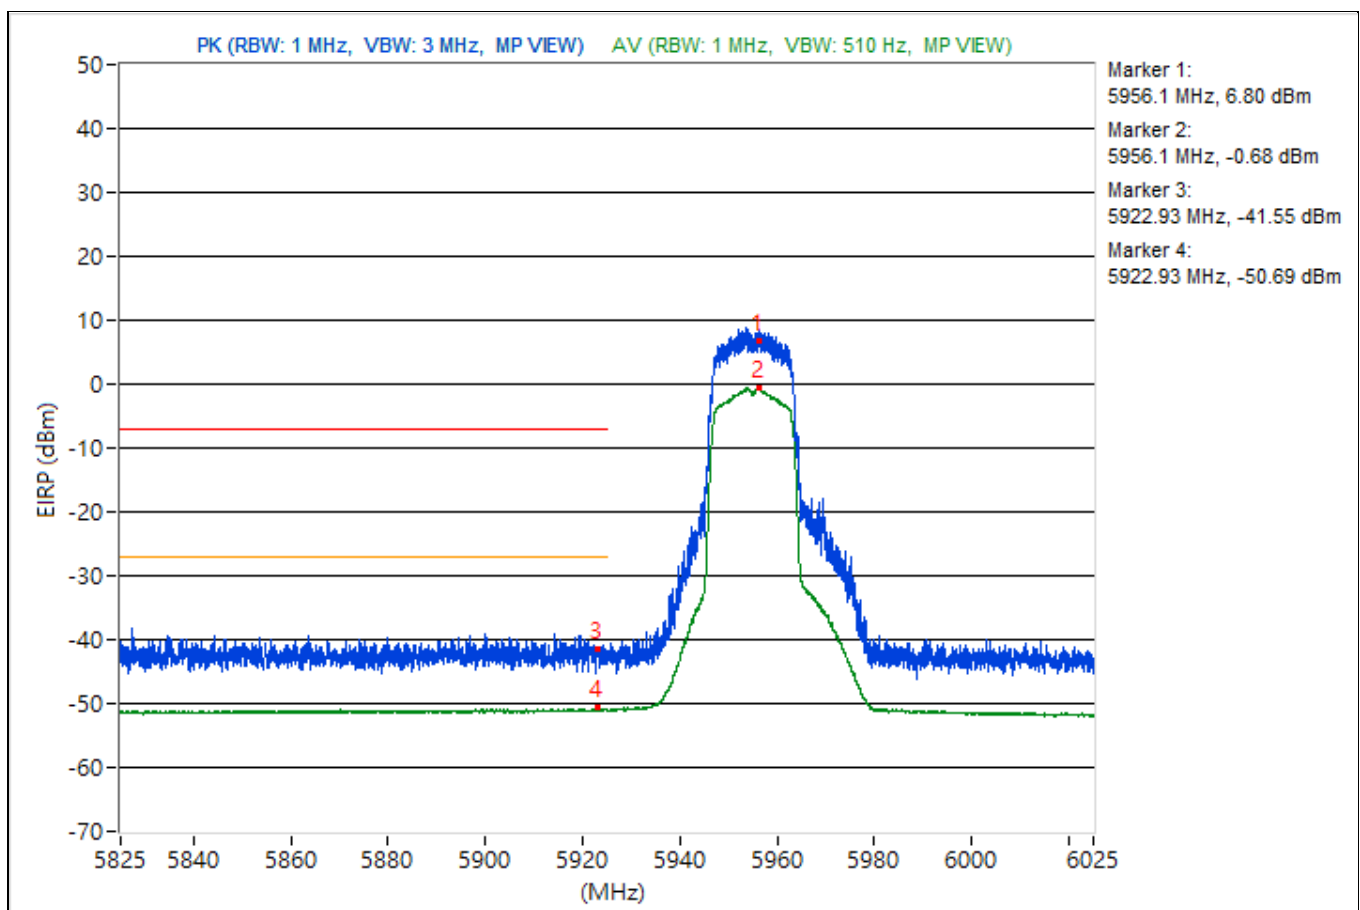


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.2	102.78 PK			3.43	4.09	7.52
2	*7116.2	94.11 AV			-5.24	4.09	-1.15
3	#7125	68.03 PK	88.26	-20.23	-31.32	4.09	-27.23
4	#7125	55.69 AV	68.26	-12.57	-43.66	4.09	-39.57

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

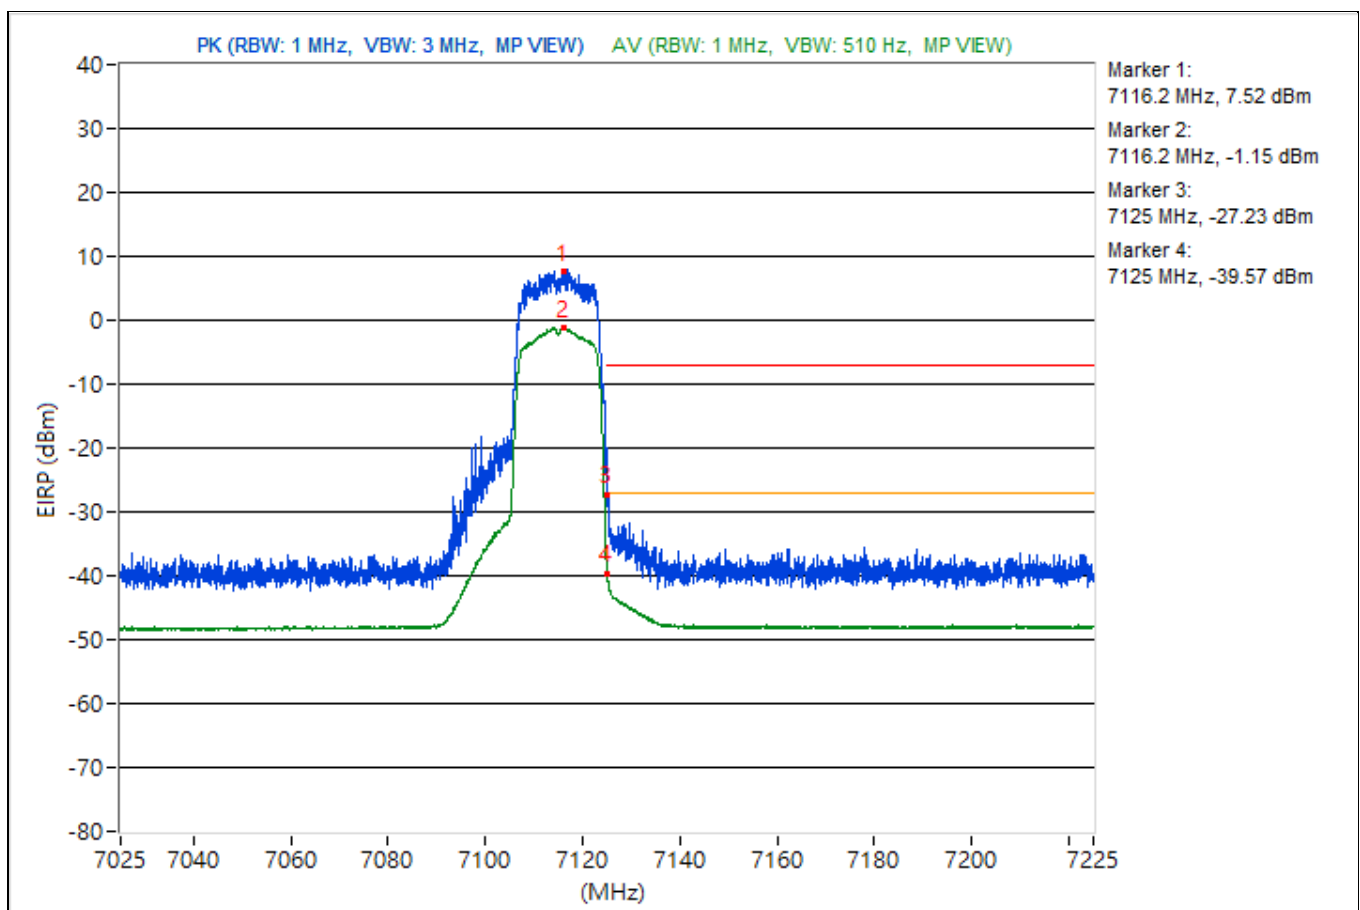


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.82	88.14 PK			-11.88	4.76	-7.12
2	*5935.82	80.91 AV			-19.11	4.76	-14.35
3	#5924.98	77.45 PK	88.26	-10.81	-22.57	4.76	-17.81
4	#5924.98	67.84 AV	68.26	-0.42	-32.18	4.76	-27.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

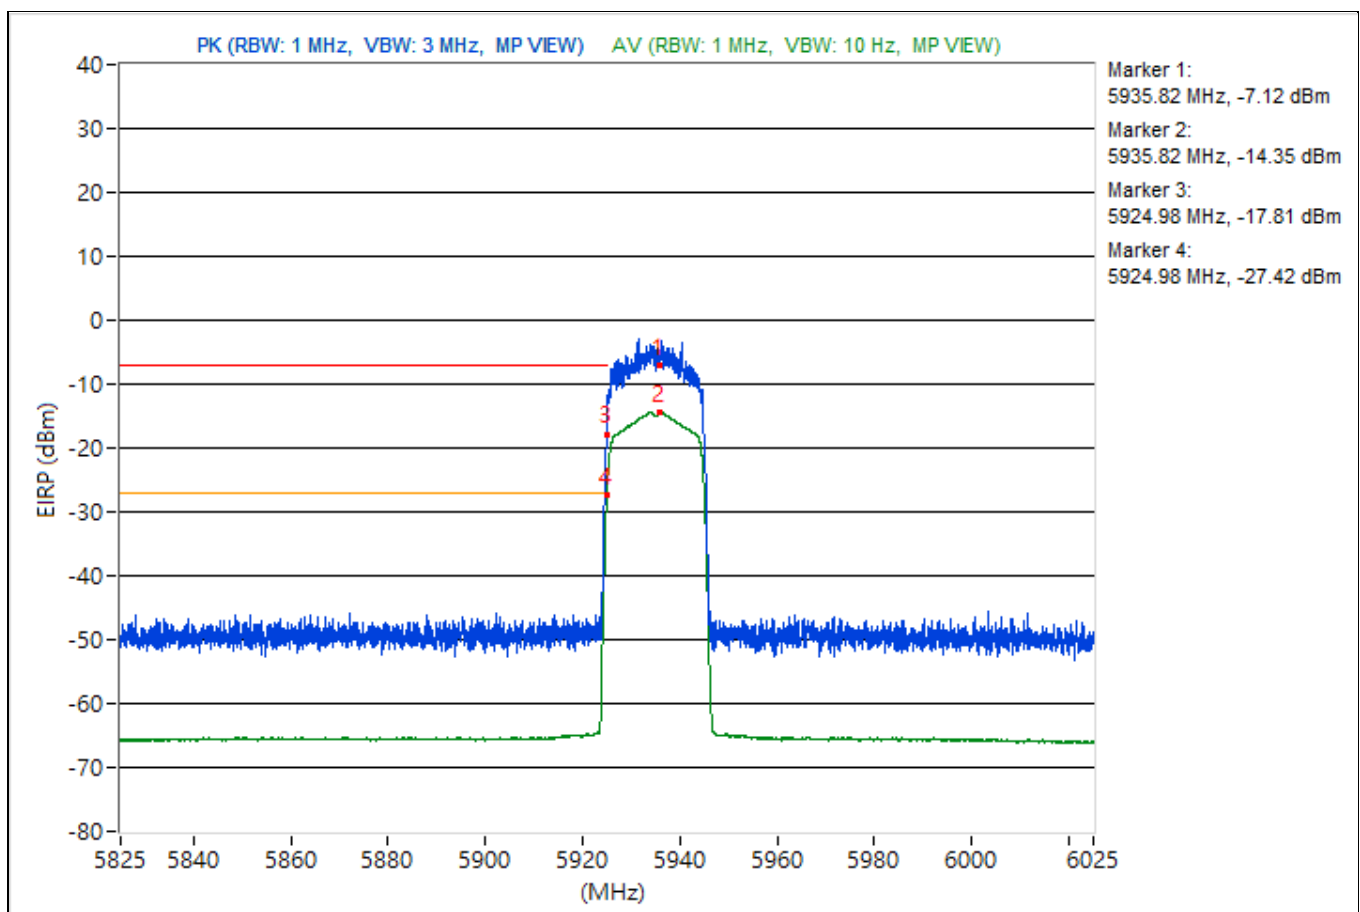


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.9	101.68 PK			1.66	4.76	6.42
2	*5953.9	93.69 AV			-6.33	4.76	-1.57
3	#5924.98	51.37 PK	88.26	-36.89	-48.65	4.76	-43.89
4	#5924.98	43.97 AV	68.26	-24.29	-56.05	4.76	-51.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

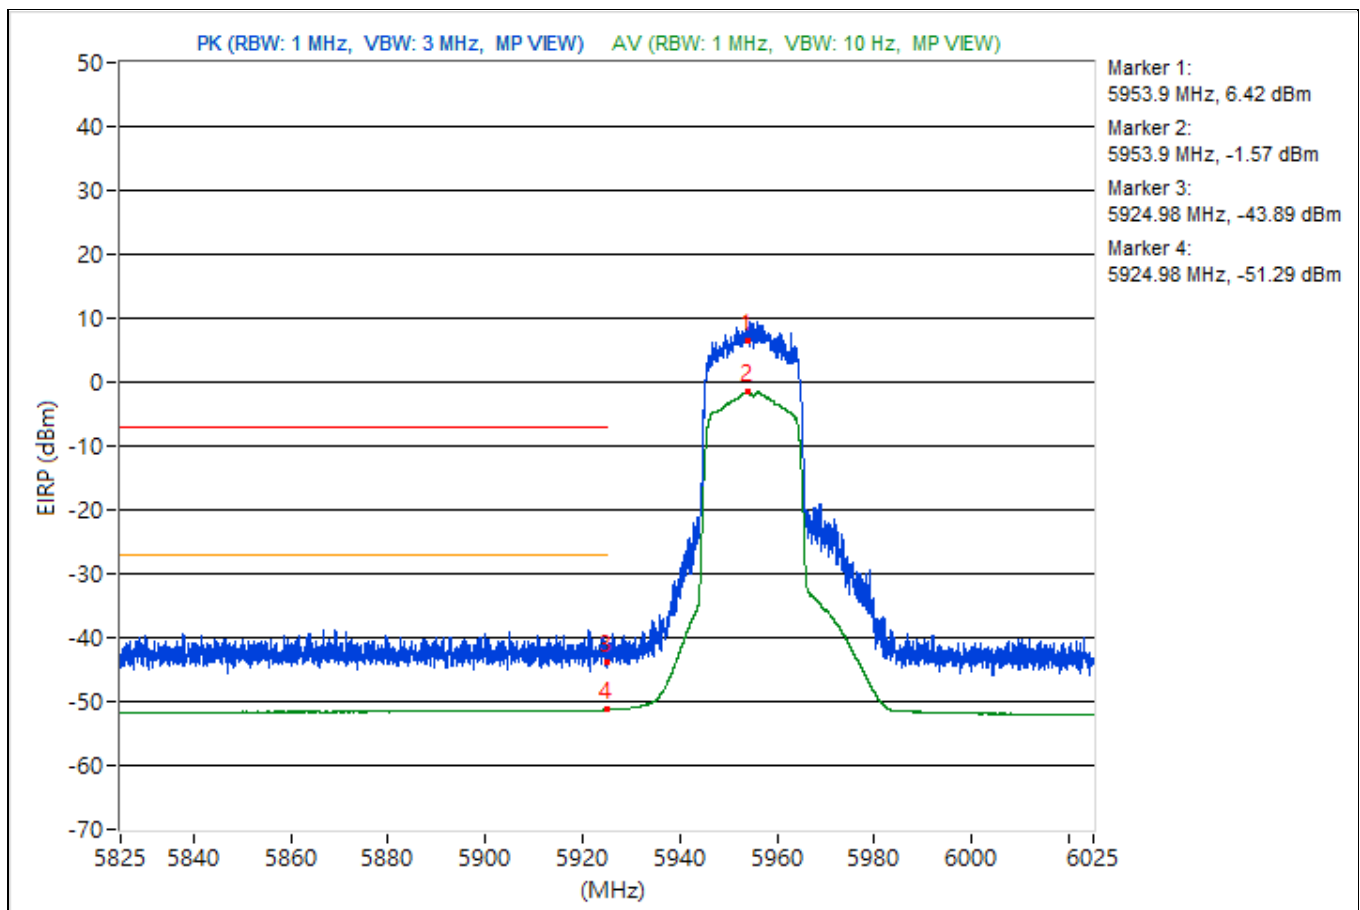


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7115.87	100.71 PK			1.36	4.09	5.45
2	*7115.87	91.74 AV			-7.61	4.09	-3.52
3	#7125	88.07 PK	88.26	-0.19	-11.28	4.09	-7.19
4	!#7125	78.55 AV	68.26	10.29	-20.8	4.09	-16.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

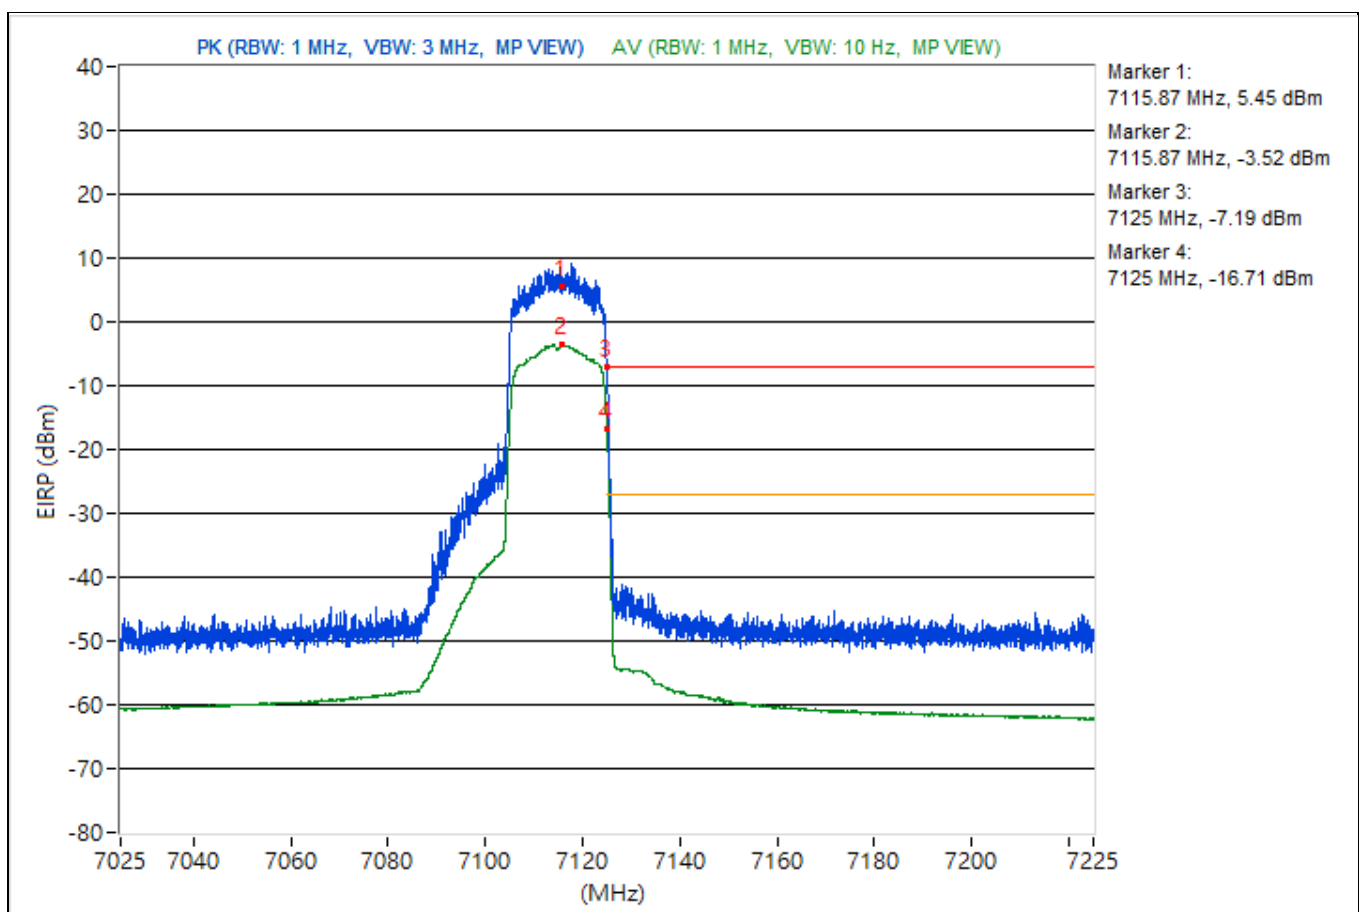


For Integration method:

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	52.07 AV	68.2	-16.13	-47.28	4.09	-43.19

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

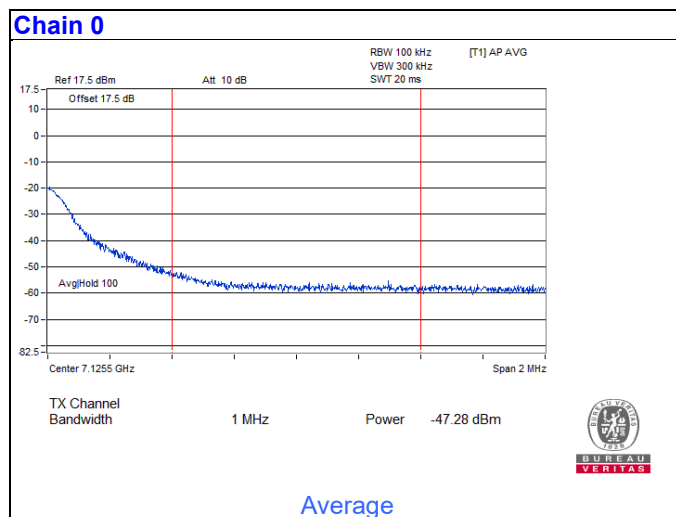


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5963.8	103.2 PK			3.18	4.76	7.94
2	*5963.8	93.35 AV			-6.67	4.76	-1.91
3	#5924.95	54.32 PK	88.26	-33.94	-45.7	4.76	-40.94
4	#5924.95	44.77 AV	68.26	-23.49	-55.25	4.76	-50.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

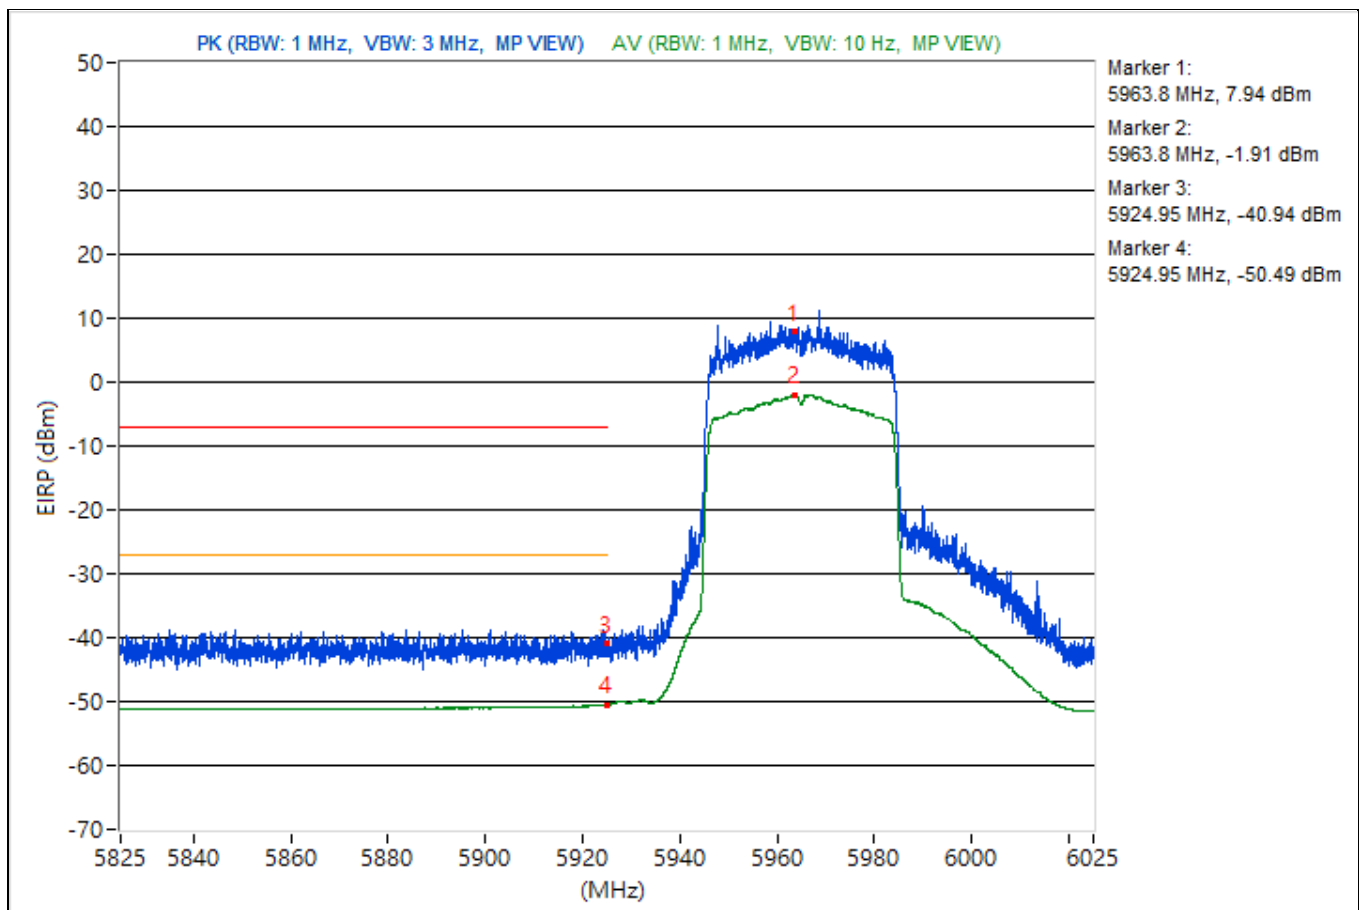


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7083.48	100.5 PK			1.15	4.09	5.24
2	*7083.48	93.19 AV			-6.16	4.09	-2.07
3	#7125.02	48.03 PK	88.26	-40.23	-51.32	4.09	-47.23
4	#7125.02	39.64 AV	68.26	-28.62	-59.71	4.09	-55.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

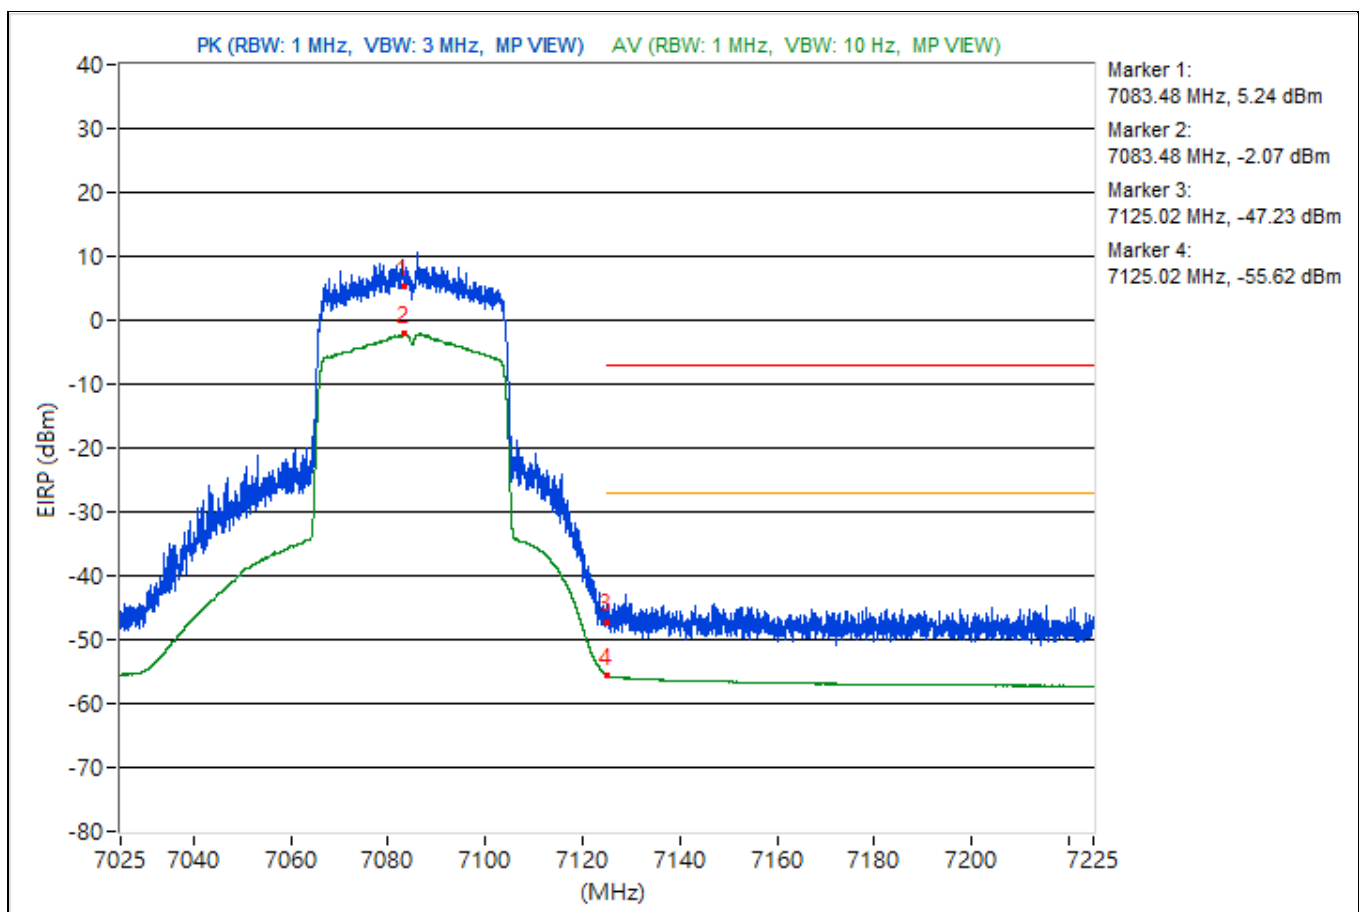


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.52	102.39 PK			2.37	4.76	7.13
2	*5982.52	94.6 AV			-5.42	4.76	-0.66
3	#5919.87	56.32 PK	88.26	-31.94	-43.7	4.76	-38.94
4	#5919.87	48.61 AV	68.26	-19.65	-51.41	4.76	-46.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

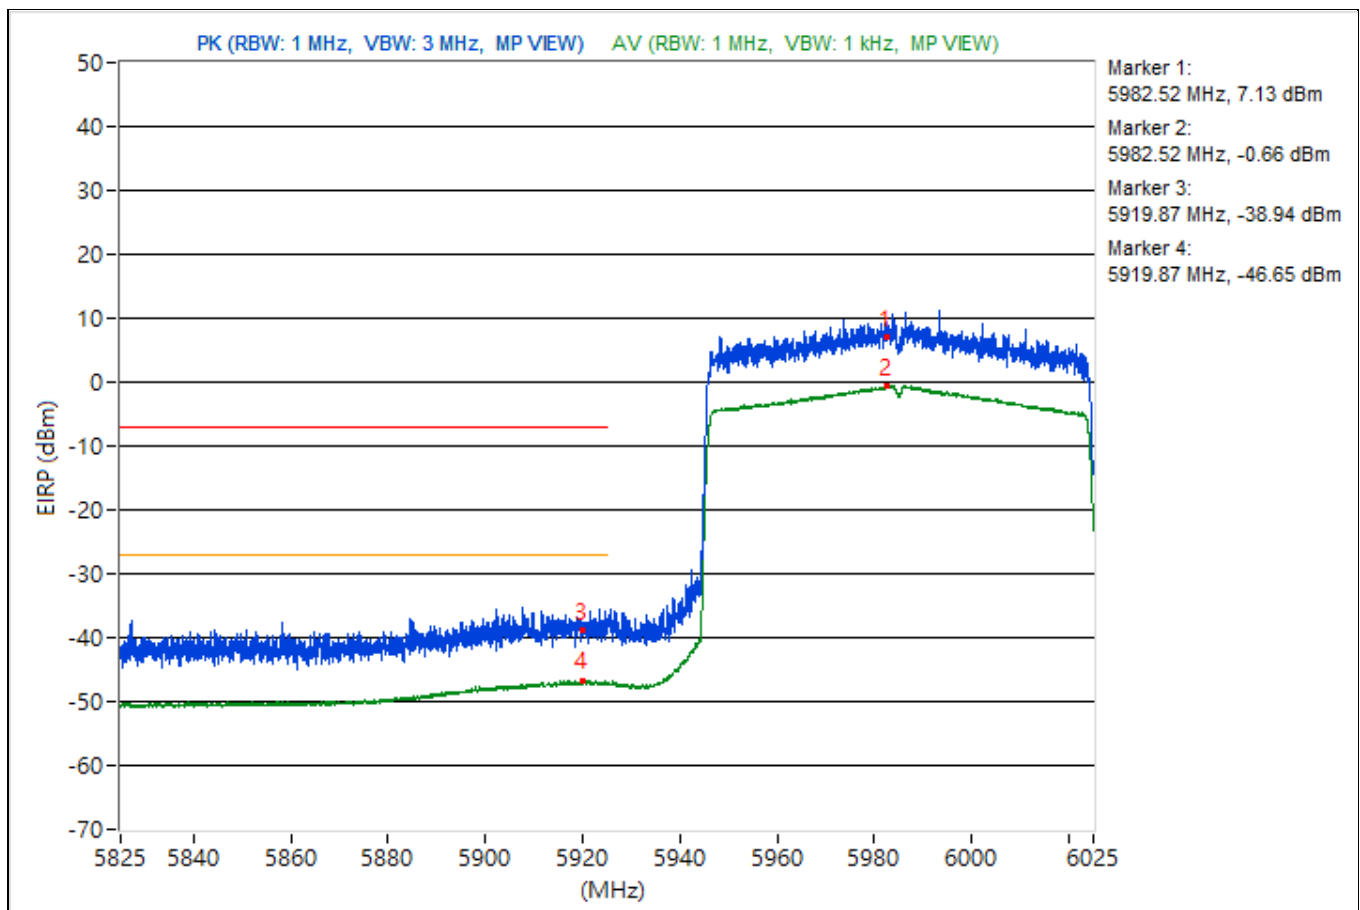


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	6.925 GHz ~ 7.325 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7023.25	101.19 PK			1.84	4.09	5.93
2	*7023.25	93.89 AV			-5.46	4.09	-1.37
3	#7126.85	49.5 PK	88.26	-38.76	-49.85	4.09	-45.76
4	#7126.85	40.43 AV	68.26	-27.83	-58.92	4.09	-54.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

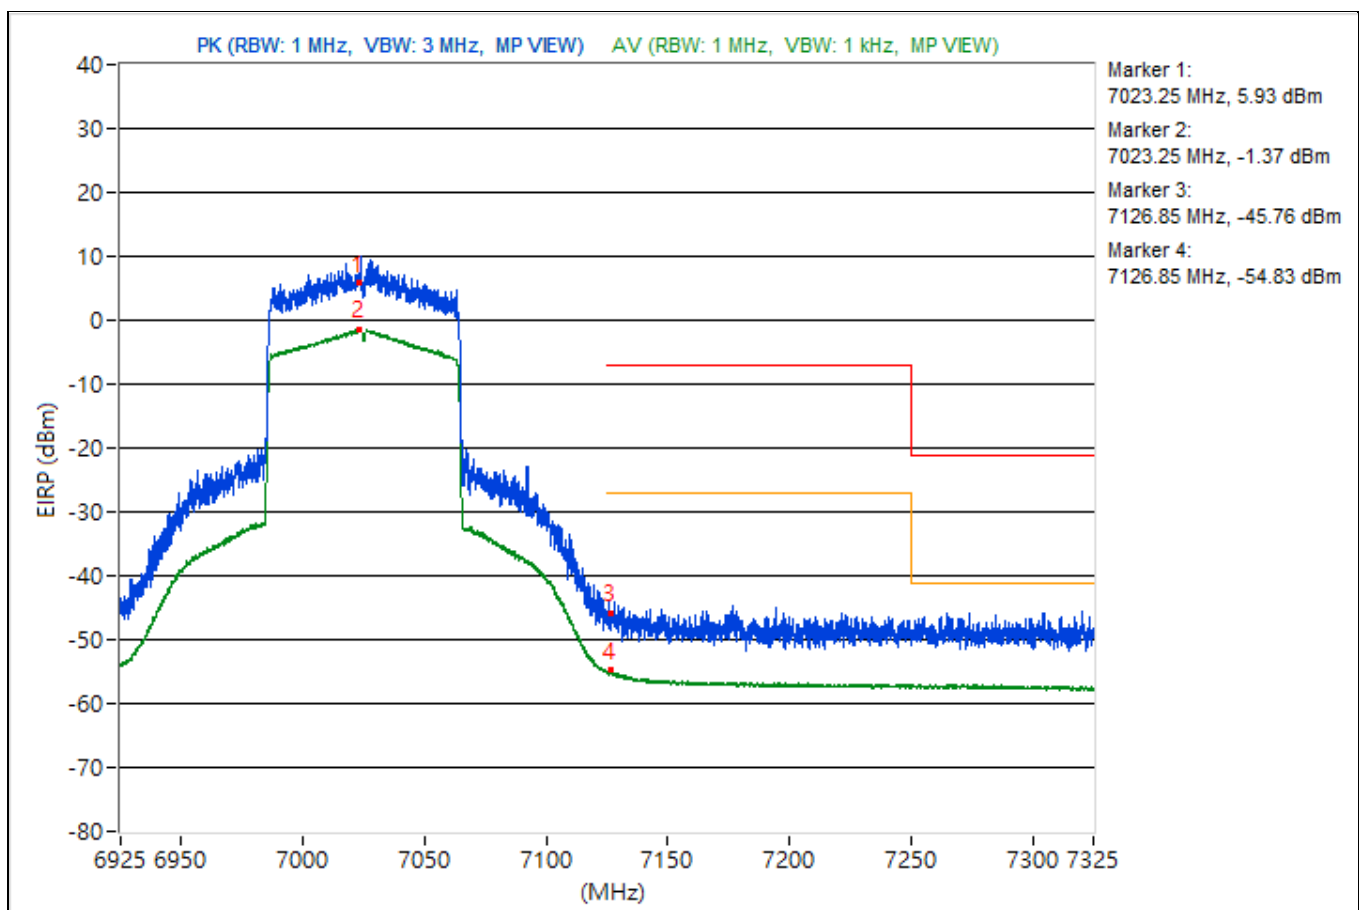


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.9	102.67 PK			2.65	4.76	7.41
2	*6022.9	89.88 AV			-10.14	4.76	-5.38
3	#5923.35	62.98 PK	88.26	-25.28	-37.04	4.76	-32.28
4	#5923.35	52.63 AV	68.26	-15.63	-47.39	4.76	-42.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

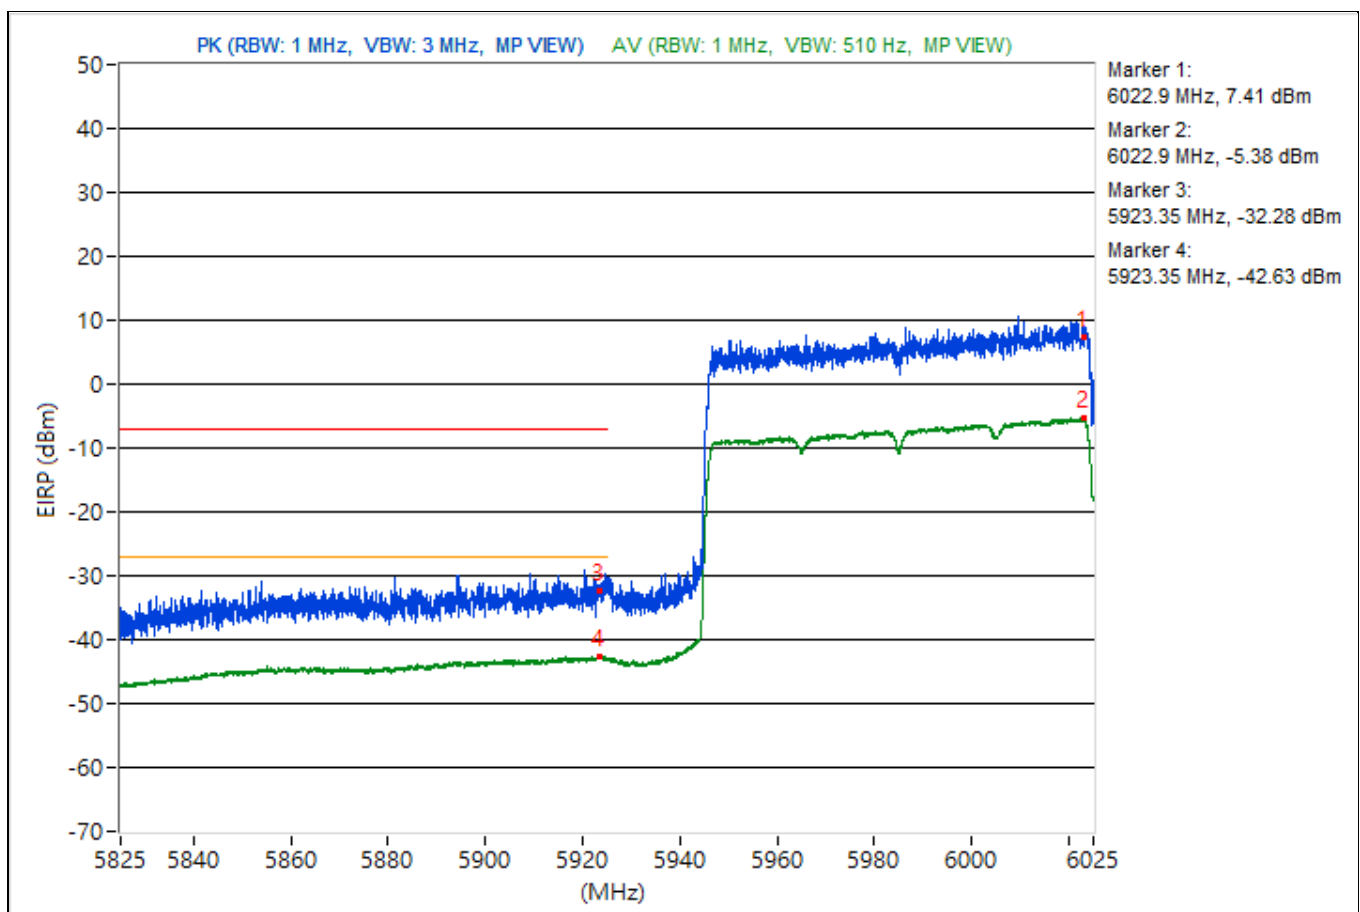


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6981.69	101.59 PK			2.24	4.09	6.33
2	*6981.69	93.55 AV			-5.8	4.09	-1.71
3	#7125	62.29 PK	88.26	-25.97	-37.06	4.09	-32.97
4	#7125	54.42 AV	68.26	-13.84	-44.93	4.09	-40.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

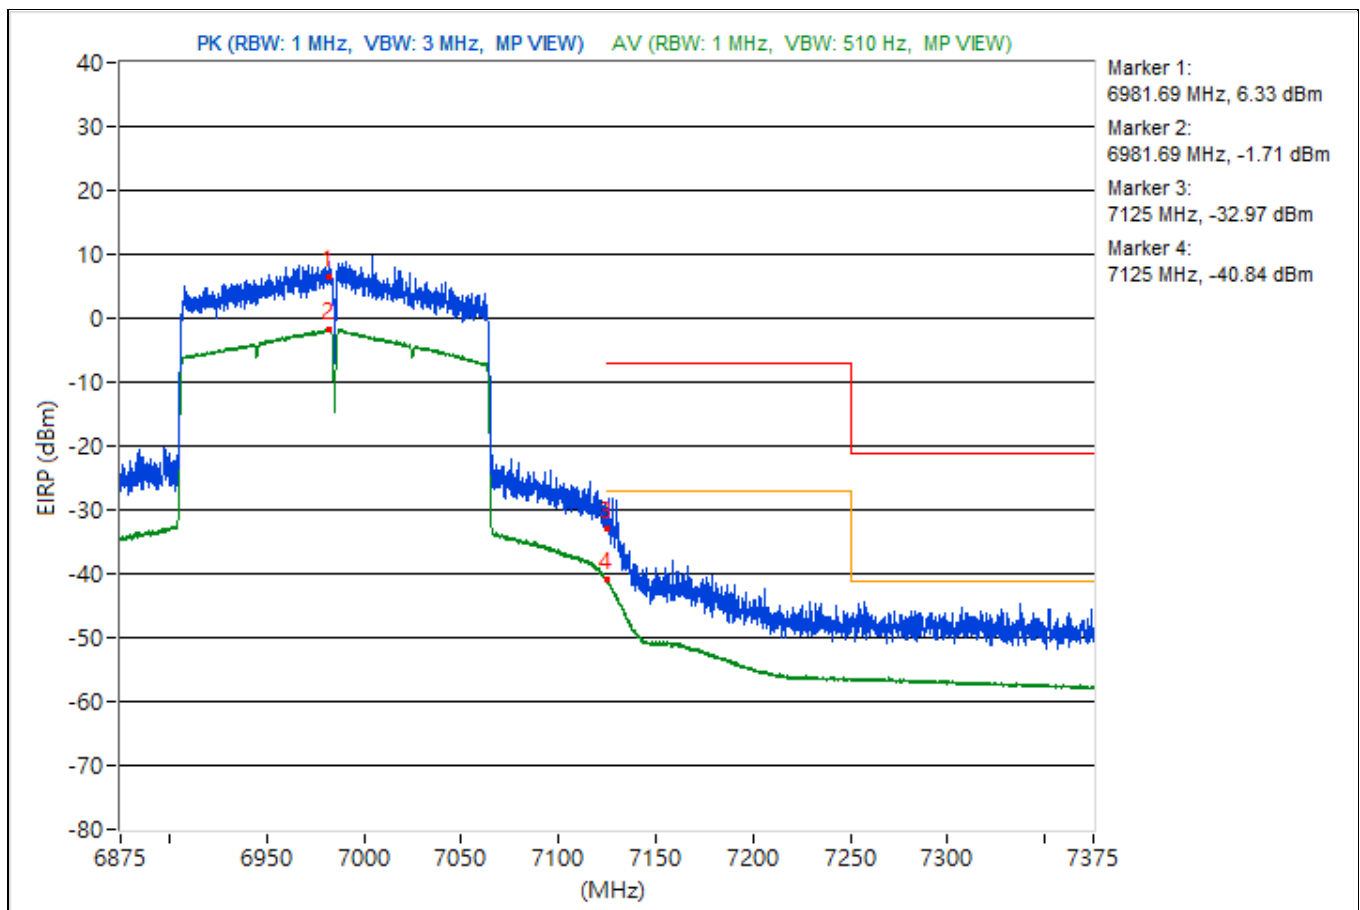


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.2	95.31 PK			-4.71	4.76	0.05
2	*5926.2	89.14 AV			-10.88	4.76	-6.12
3	#5924.98	87.88 PK	88.26	-0.38	-12.14	4.76	-7.38
4	!#5924.98	79.23 AV	68.26	10.97	-20.79	4.76	-16.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

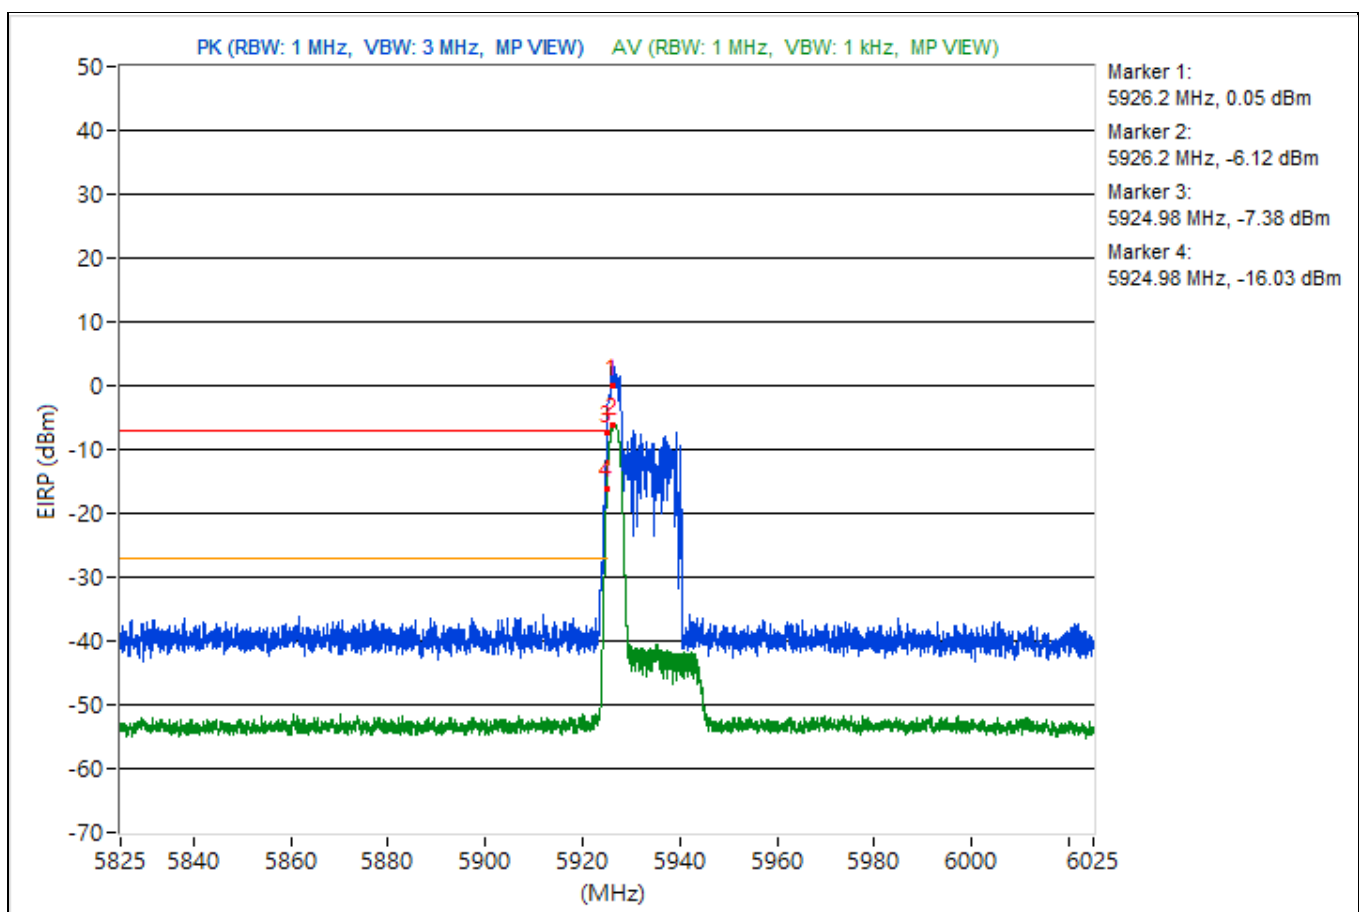


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	56.67 AV	68.2	-11.53	-43.35	4.76	-38.59

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

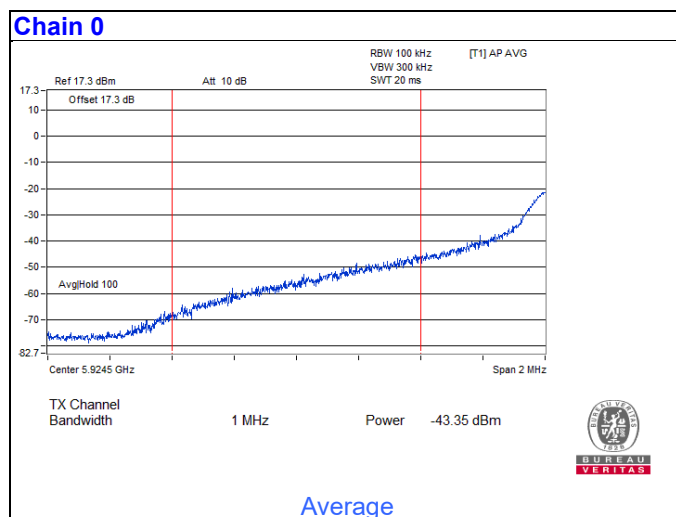


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.4	104.94 PK			4.92	4.76	9.68
2	*5946.4	94.7 AV			-5.32	4.76	-0.56
3	#5885.3	46.87 PK	88.26	-41.39	-53.15	4.76	-48.39
4	#5885.3	34.64 AV	68.26	-33.62	-65.38	4.76	-60.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

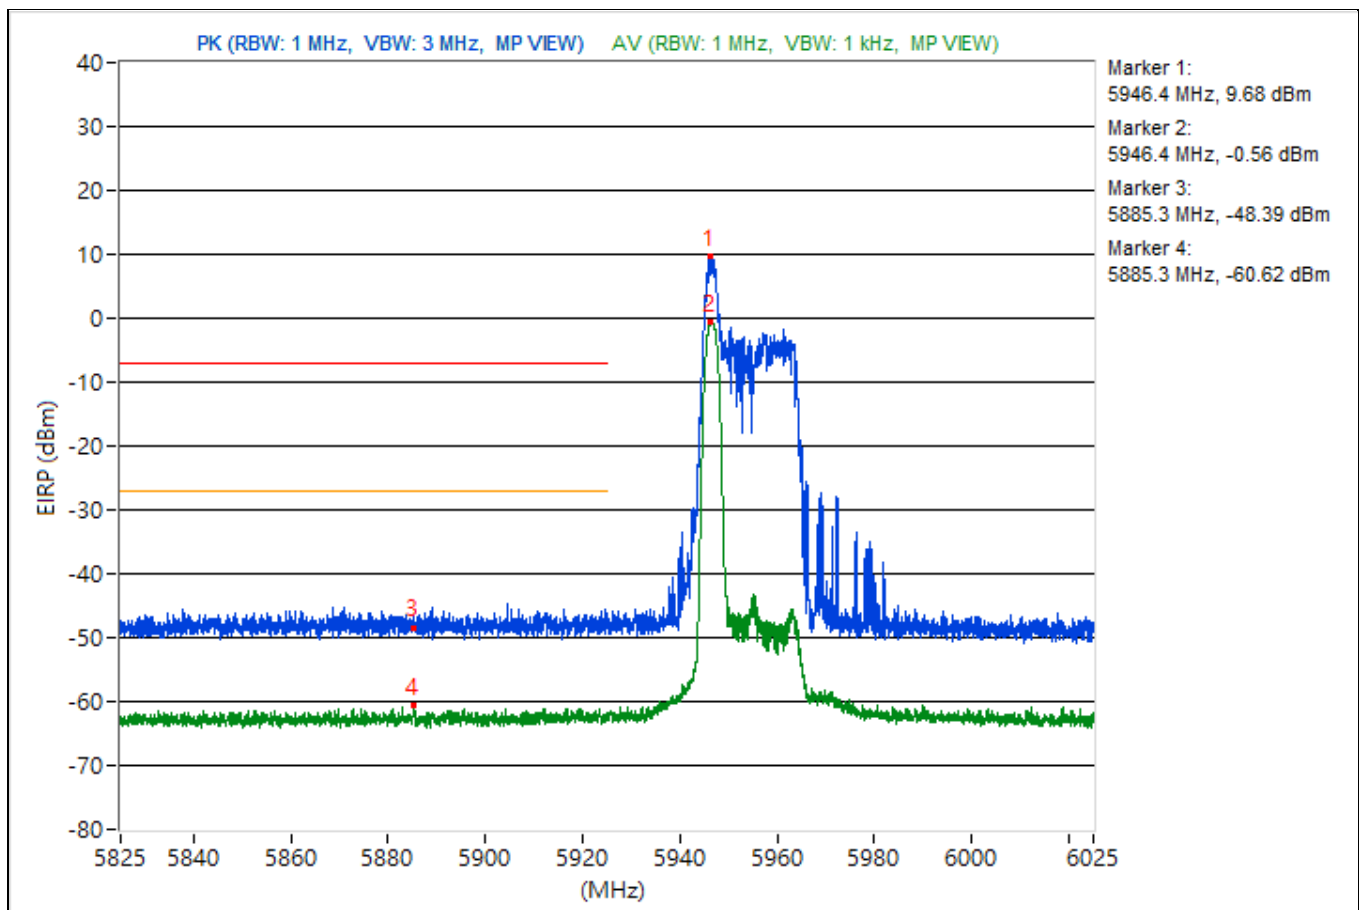


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7123.57	99.08 PK			-0.27	4.09	3.82
2	*7123.57	89.7 AV			-9.65	4.09	-5.56
3	#7125	88.05 PK	88.26	-0.21	-11.3	4.09	-7.21
4	!#7125	80.33 AV	68.26	12.07	-19.02	4.09	-14.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

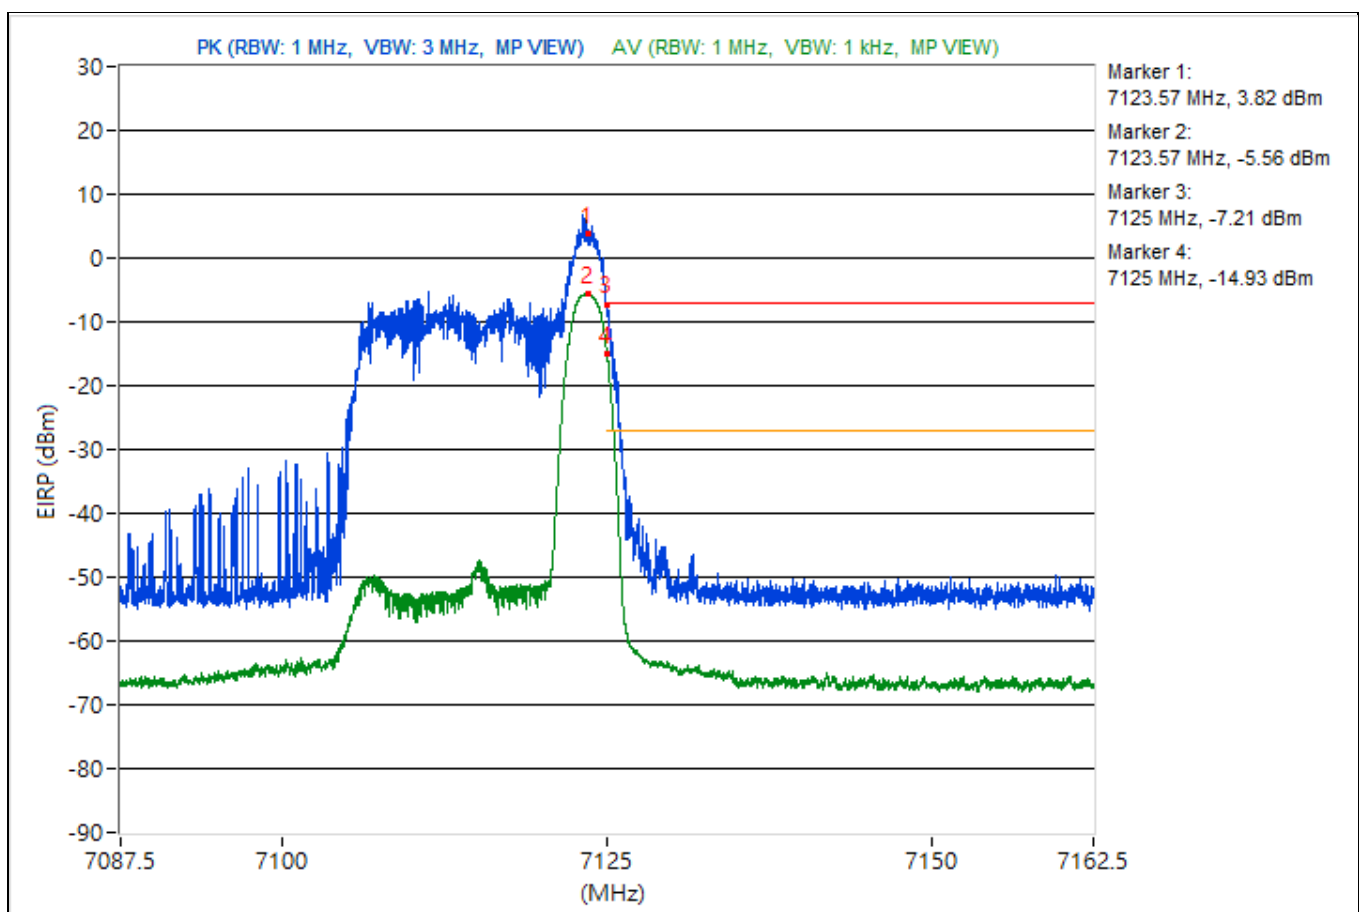


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	55.39 AV	68.2	-12.81	-43.96	4.09	-39.87

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

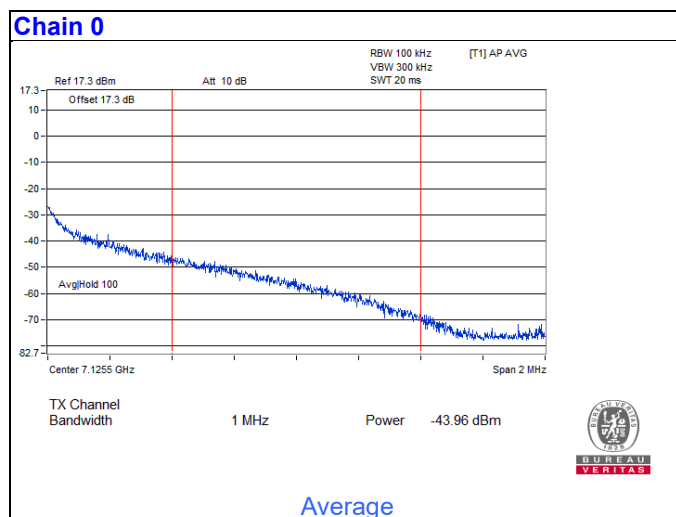


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5928.23	96.01 PK			-4.01	4.76	0.75
2	*5928.23	88.43 AV			-11.59	4.76	-6.83
3	#5924.98	88.05 PK	88.26	-0.21	-11.97	4.76	-7.21
4	!#5924.98	78.23 AV	68.26	9.97	-21.79	4.76	-17.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

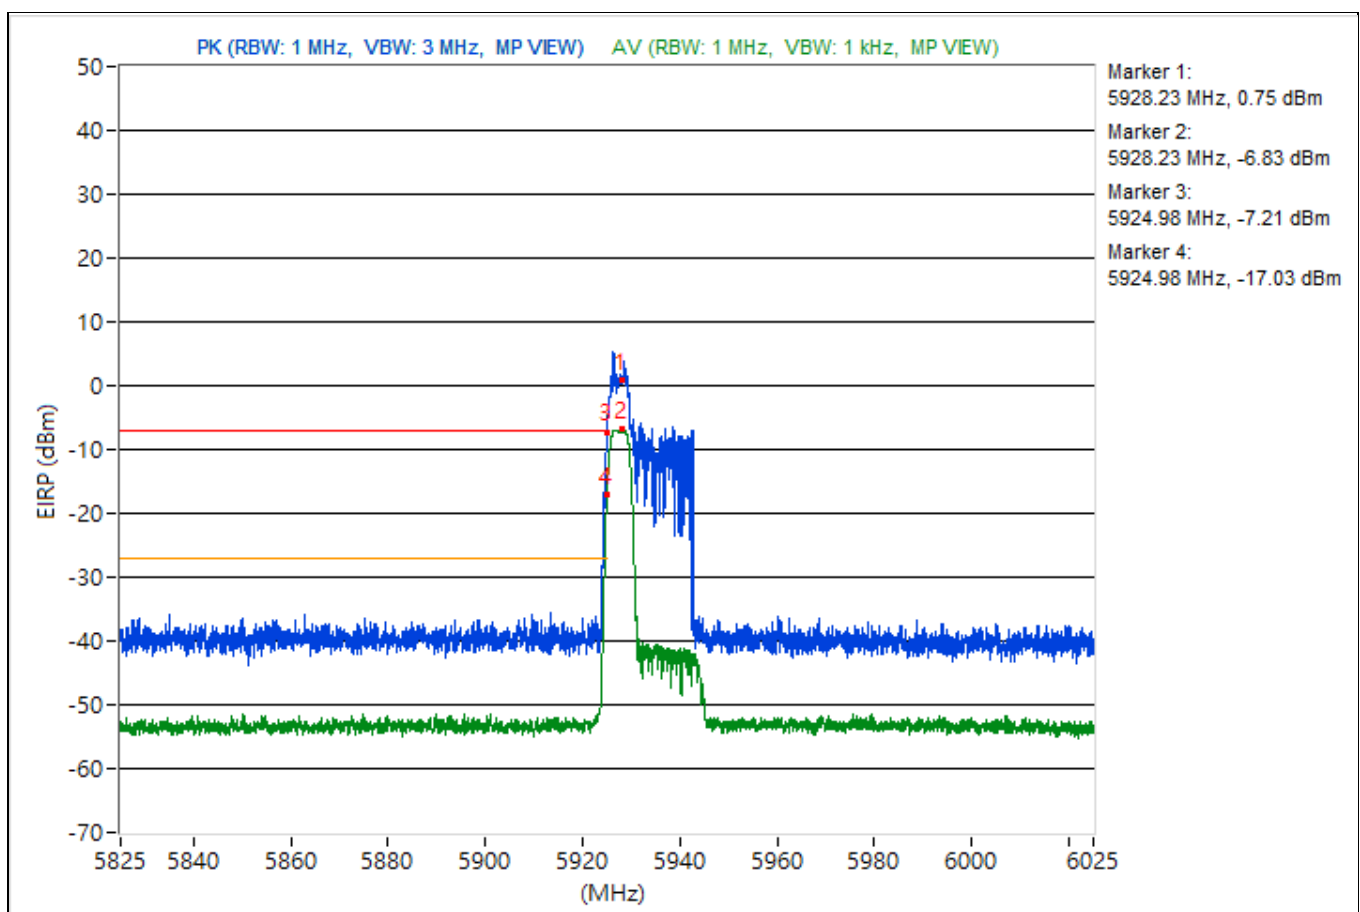


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	55.88 AV	68.2	-12.32	-44.14	4.76	-39.38

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

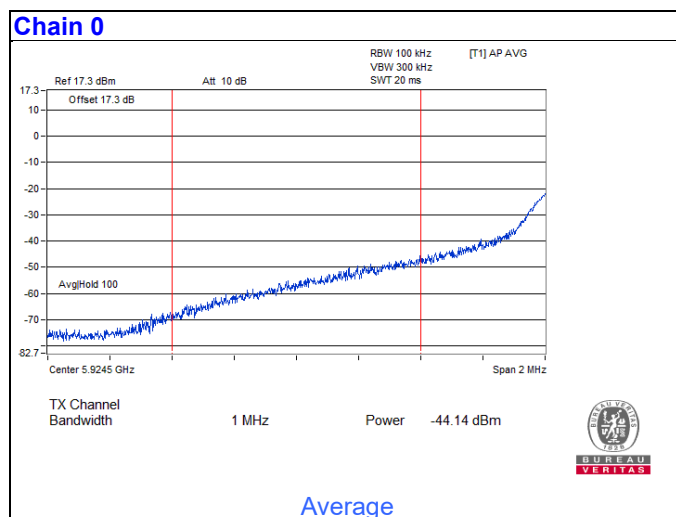


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.43	103.12 PK			3.1	4.76	7.86
2	*5947.43	95.04 AV			-4.98	4.76	-0.22
3	#5923.77	46.66 PK	88.26	-41.6	-53.36	4.76	-48.6
4	#5923.77	35.24 AV	68.26	-33.02	-64.78	4.76	-60.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

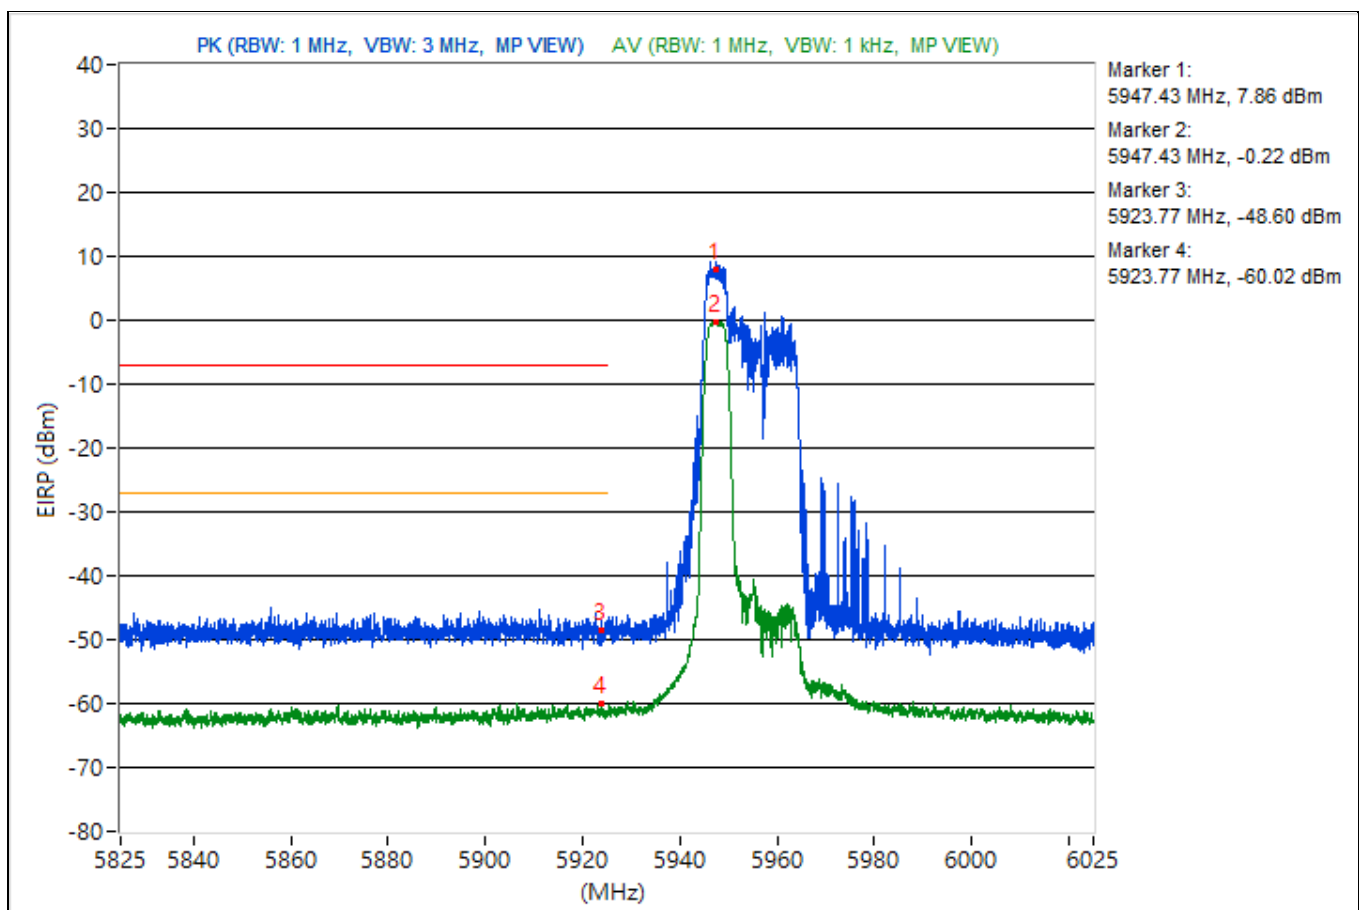


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7122.66	98.23 PK			-1.12	4.09	2.97
2	*7122.66	89.07 AV			-10.28	4.09	-6.19
3	#7125	87.96 PK	88.26	-0.3	-11.39	4.09	-7.3
4	!#7125	79.31 AV	68.26	11.05	-20.04	4.09	-15.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

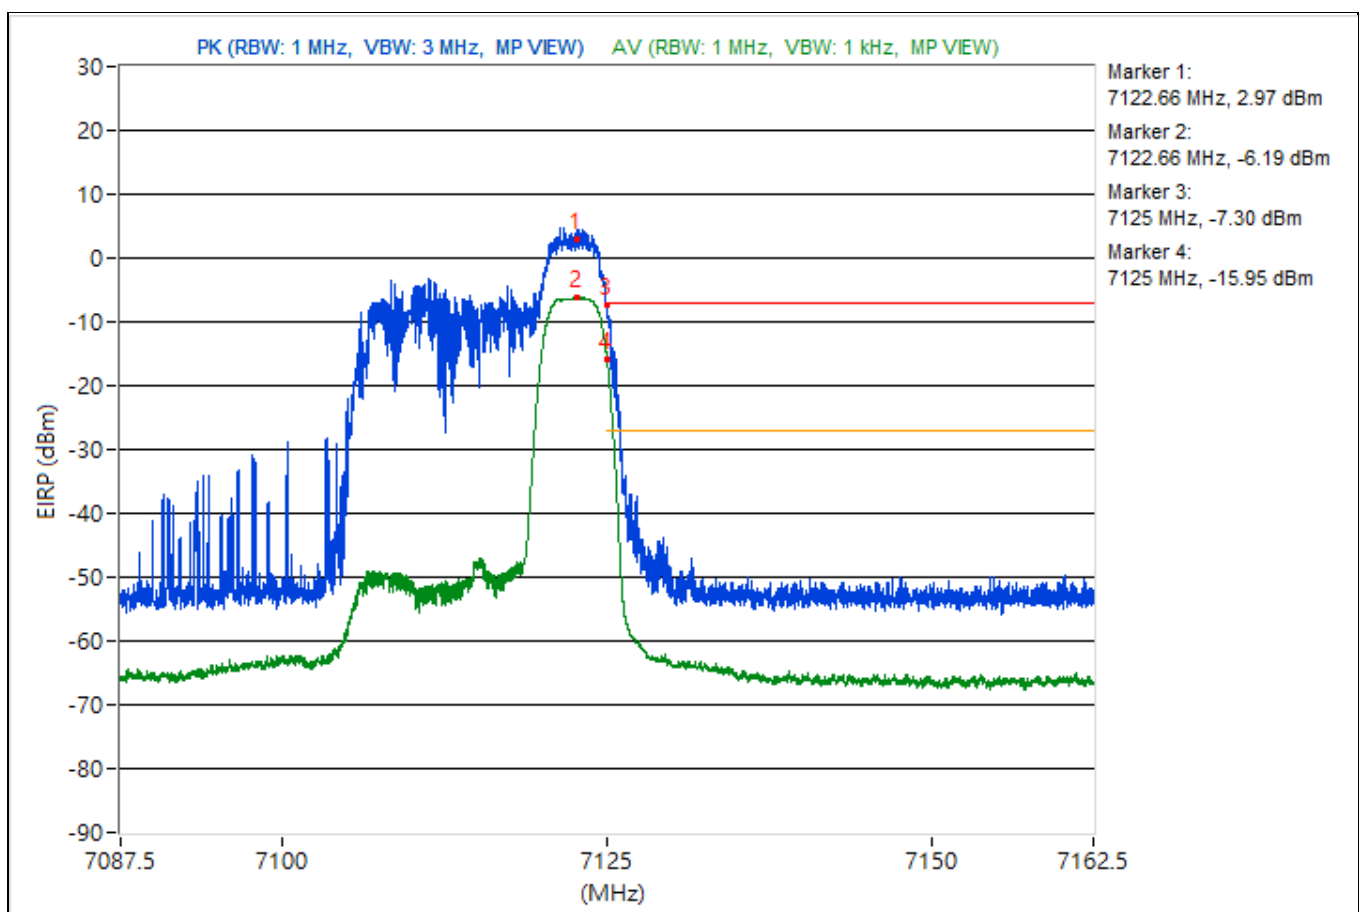


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	54.83 AV	68.2	-13.37	-44.52	4.09	-40.43

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

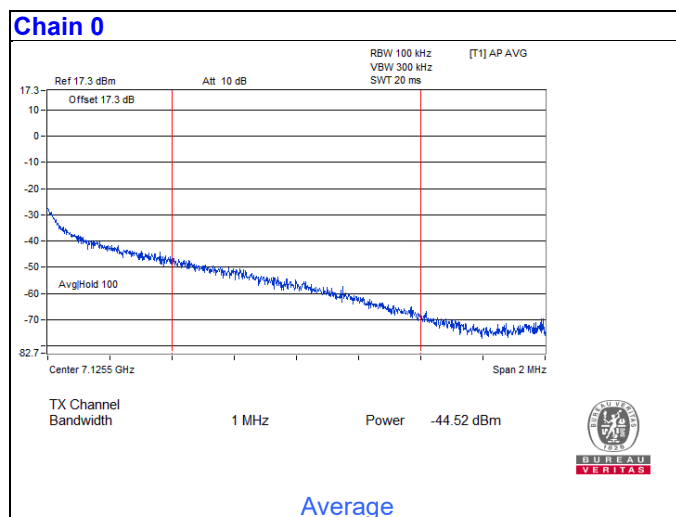


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5931.35	95.88 PK			-4.14	4.76	0.62
2	*5931.35	87.84 AV			-12.18	4.76	-7.42
3	#5924.98	88.11 PK	88.26	-0.15	-11.91	4.76	-7.15
4	!5924.98	78.84 AV	68.26	10.58	-21.18	4.76	-16.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

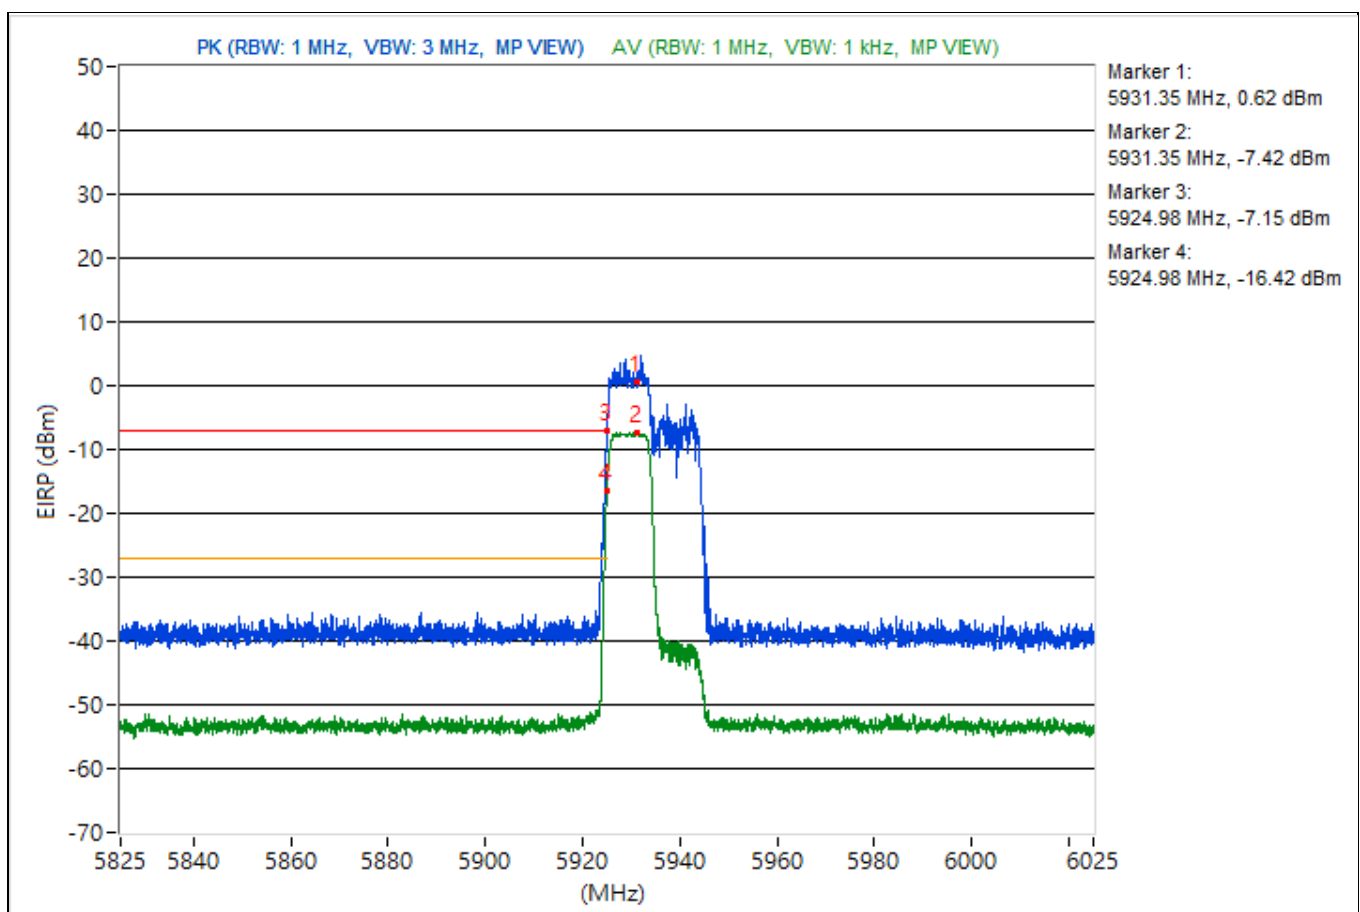


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	56.5 AV	68.2	-11.7	-43.52	4.76	-38.76

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

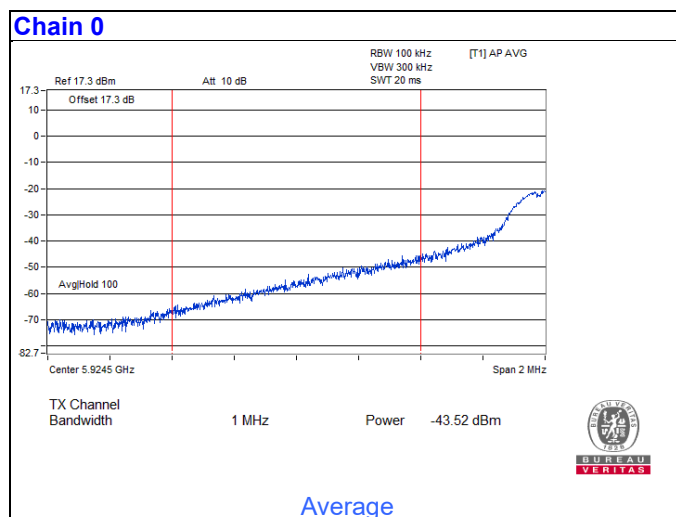


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.62	104.64 PK			4.62	4.76	9.38
2	*5948.62	95.43 AV			-4.59	4.76	0.17
3	#5919.9	57.34 PK	88.26	-30.92	-42.68	4.76	-37.92
4	#5919.9	44.48 AV	68.26	-23.78	-55.54	4.76	-50.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

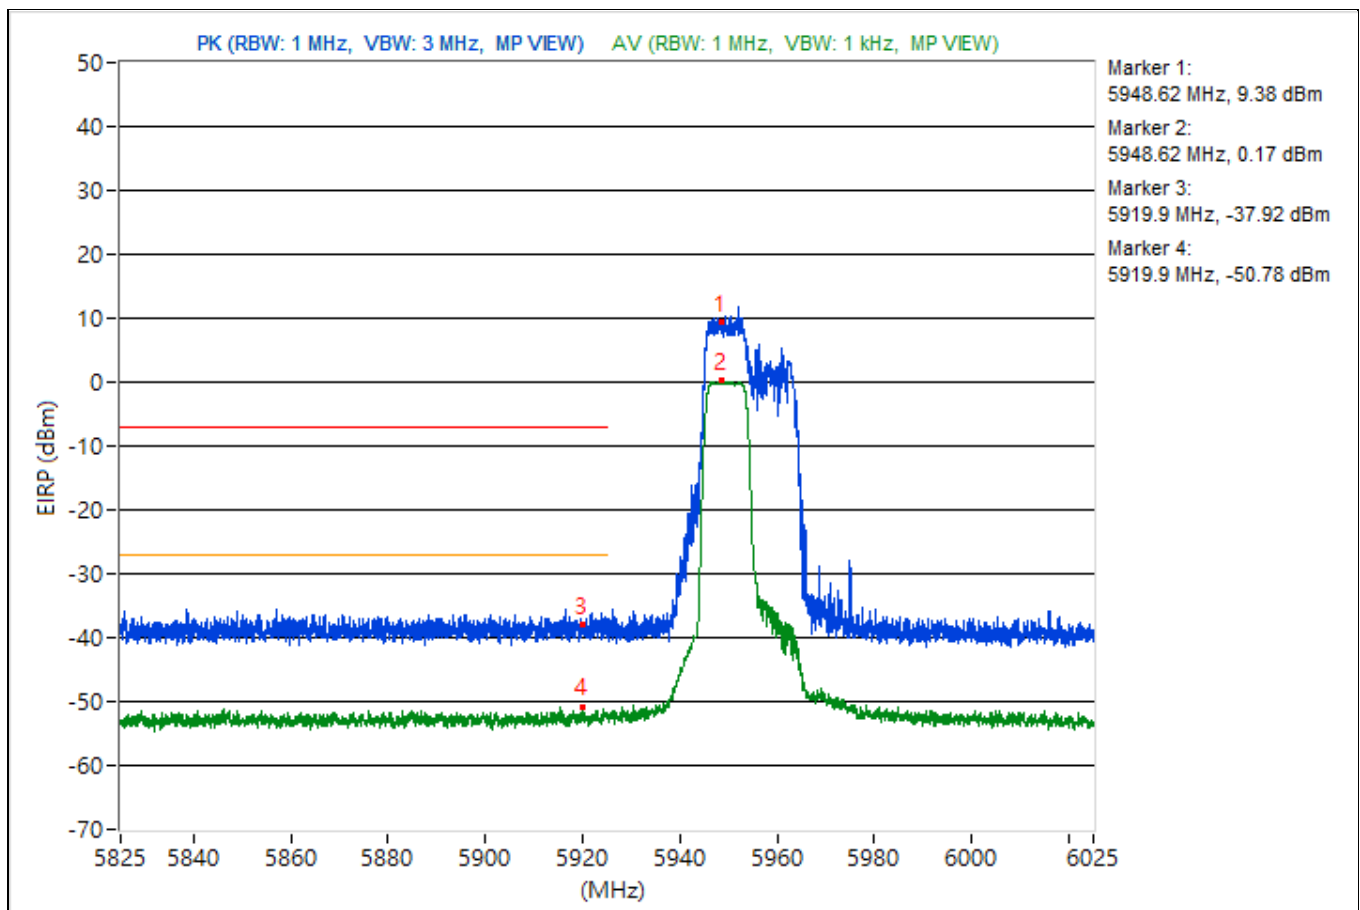


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7120.83	96.78 PK			-2.57	4.09	1.52
2	*7120.83	88.18 AV			-11.17	4.09	-7.08
3	#7125	87.79 PK	88.26	-0.47	-11.56	4.09	-7.47
4	!#7125	79.68 AV	68.26	11.42	-19.67	4.09	-15.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

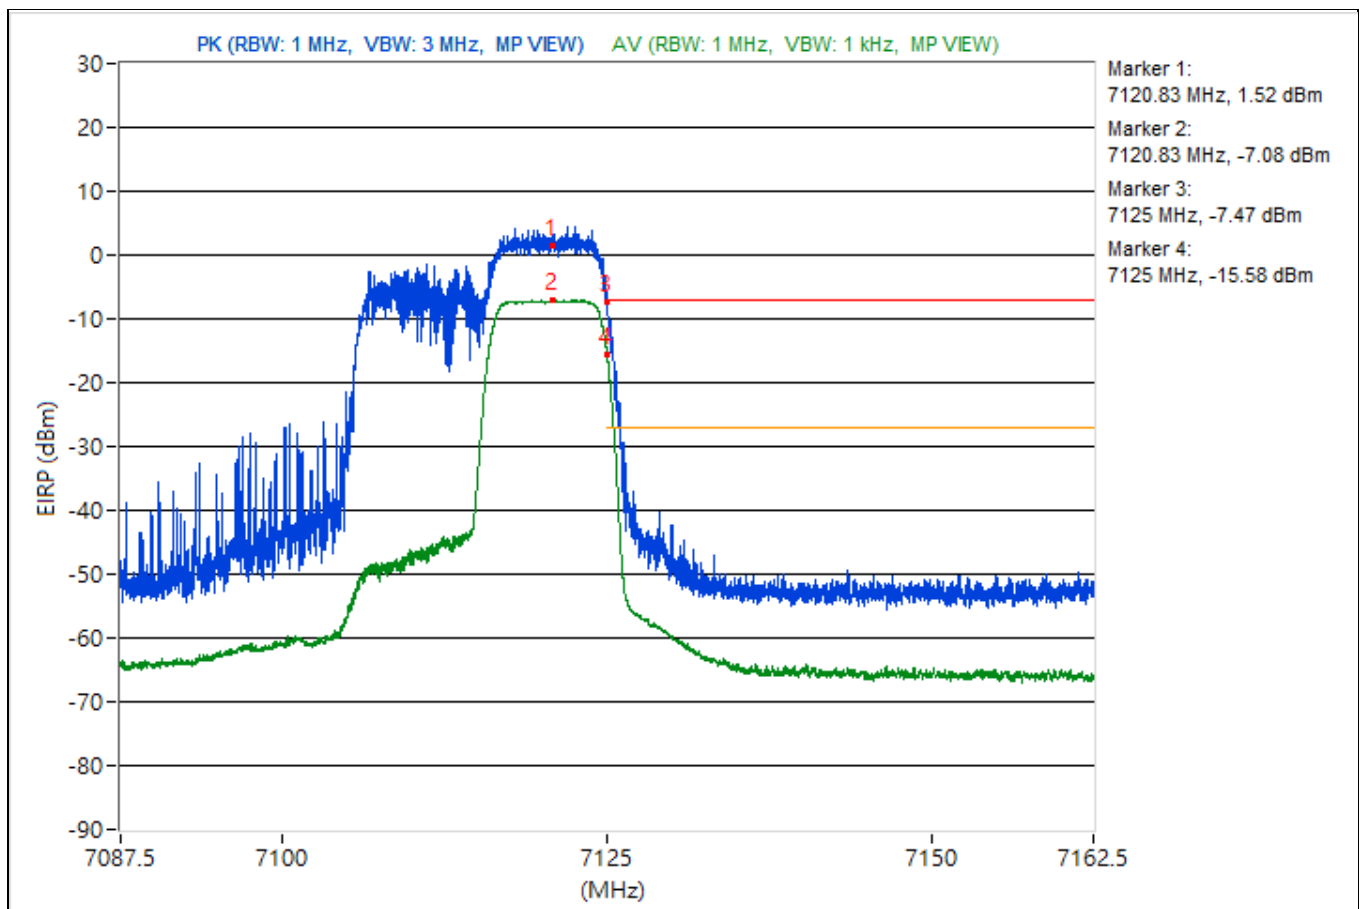


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	55.03 AV	68.2	-13.17	-44.32	4.09	-40.23

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

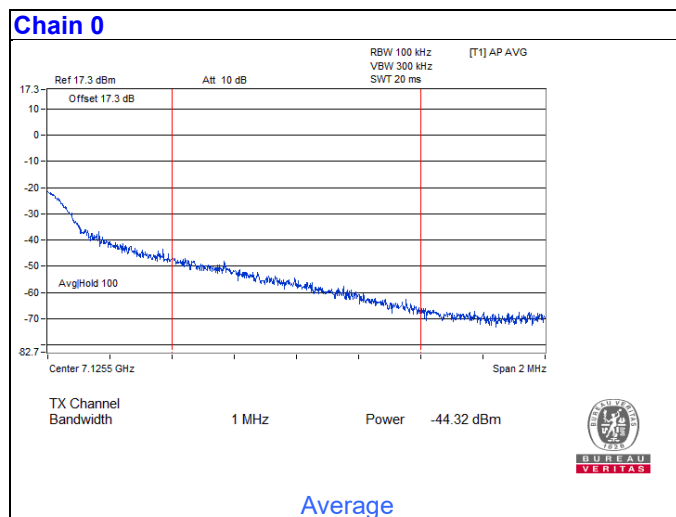


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5932.27	102.15 PK			2.13	4.76	6.89
2	*5932.27	94.1 AV			-5.92	4.76	-1.16
3	#5924.87	76.93 PK	88.26	-11.33	-23.09	4.76	-18.33
4	#5924.87	47.2 AV	68.26	-21.06	-52.82	4.76	-48.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

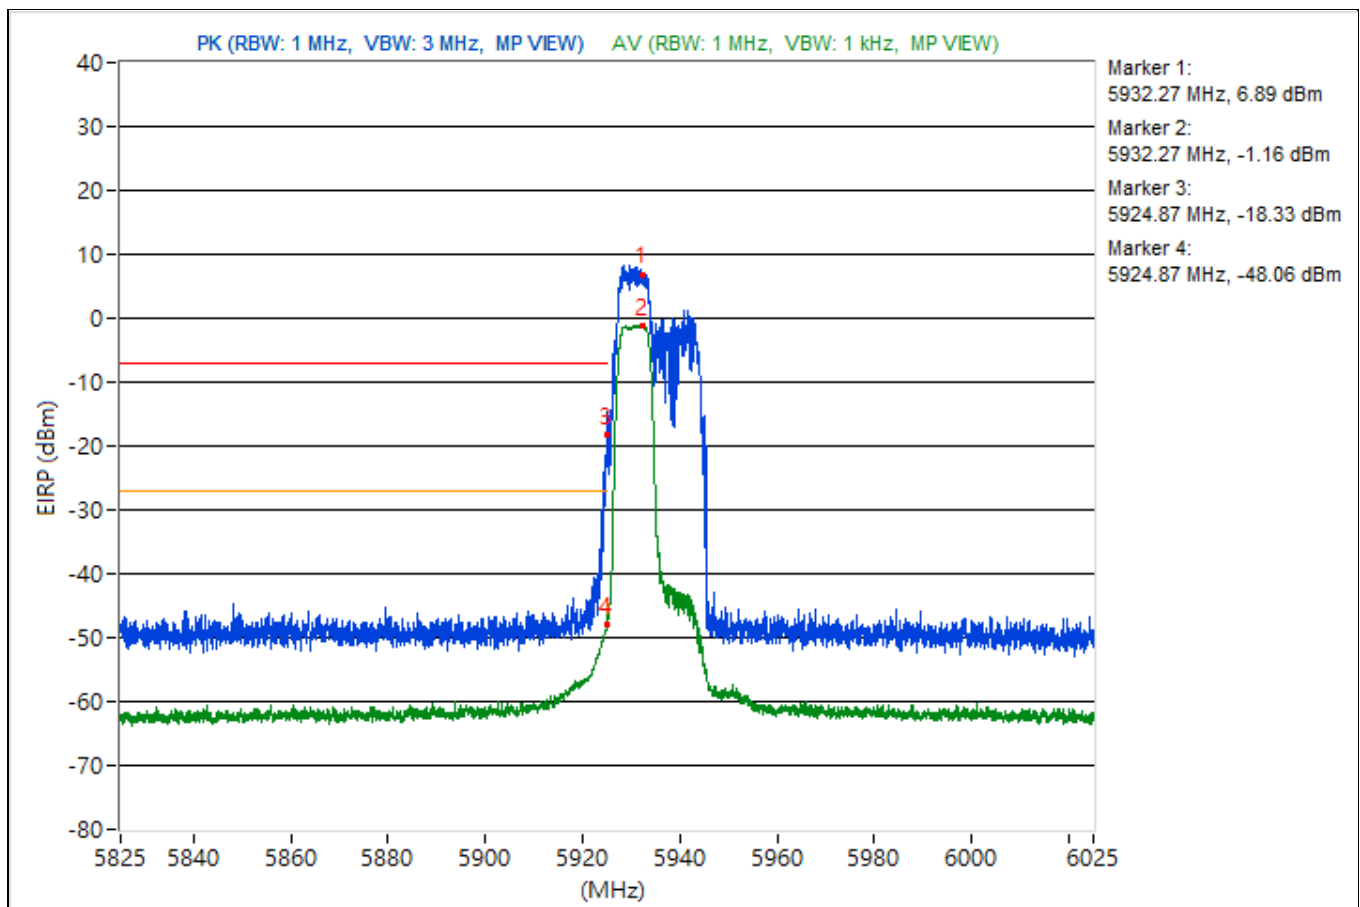


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.45	102.82 PK			2.8	4.76	7.56
2	*5951.45	94.04 AV			-5.98	4.76	-1.22
3	#5921.8	47.74 PK	88.26	-40.52	-52.28	4.76	-47.52
4	#5921.8	35.38 AV	68.26	-32.88	-64.64	4.76	-59.88

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

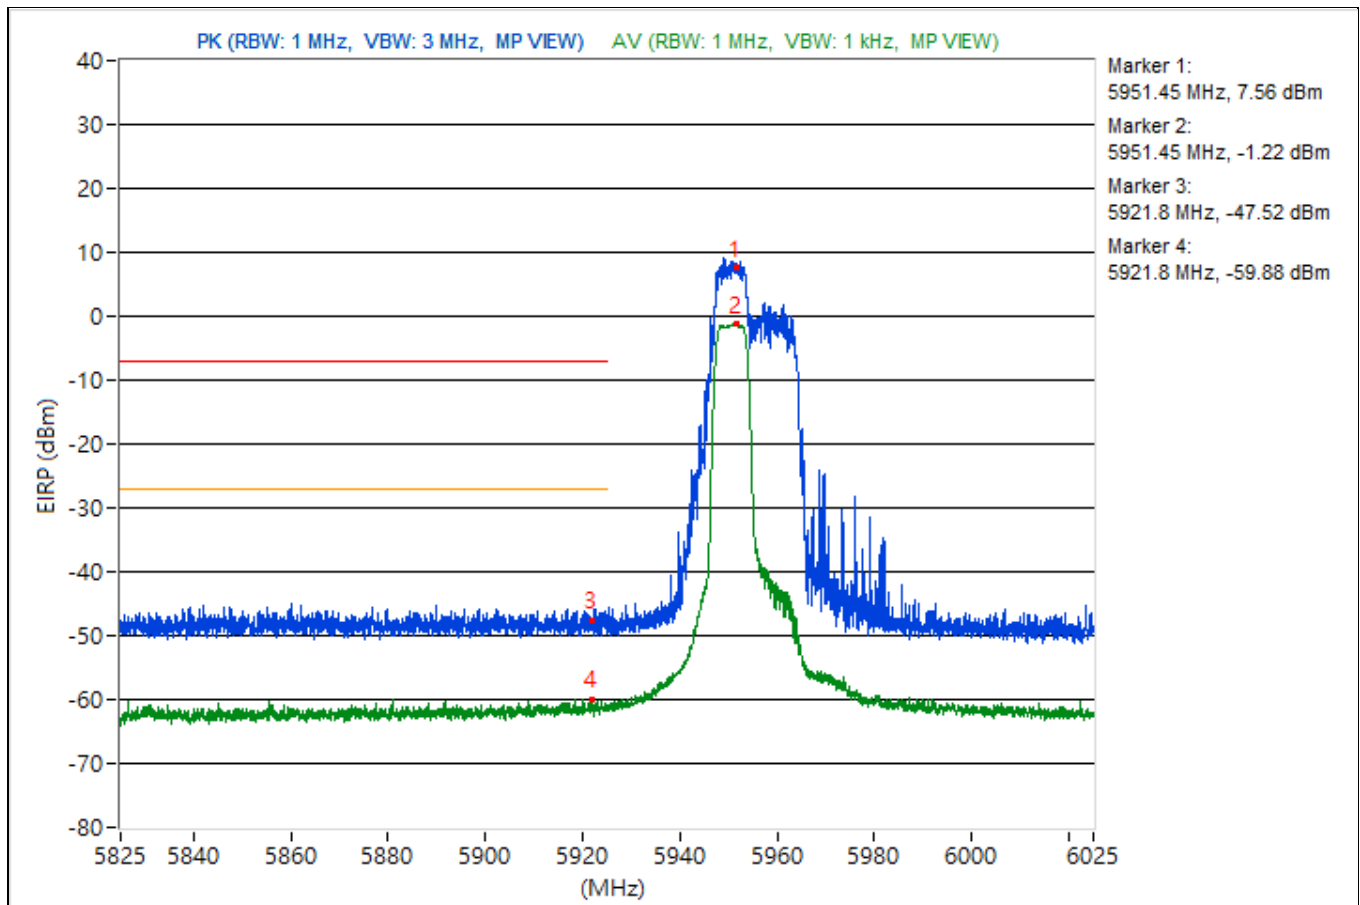


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7117.66	102.36 PK			3.01	4.09	7.1
2	*7117.66	94.86 AV			-4.49	4.09	-0.4
3	#7125.07	77.11 PK	88.26	-11.15	-22.24	4.09	-18.15
4	#7125.07	49.3 AV	68.26	-18.96	-50.05	4.09	-45.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

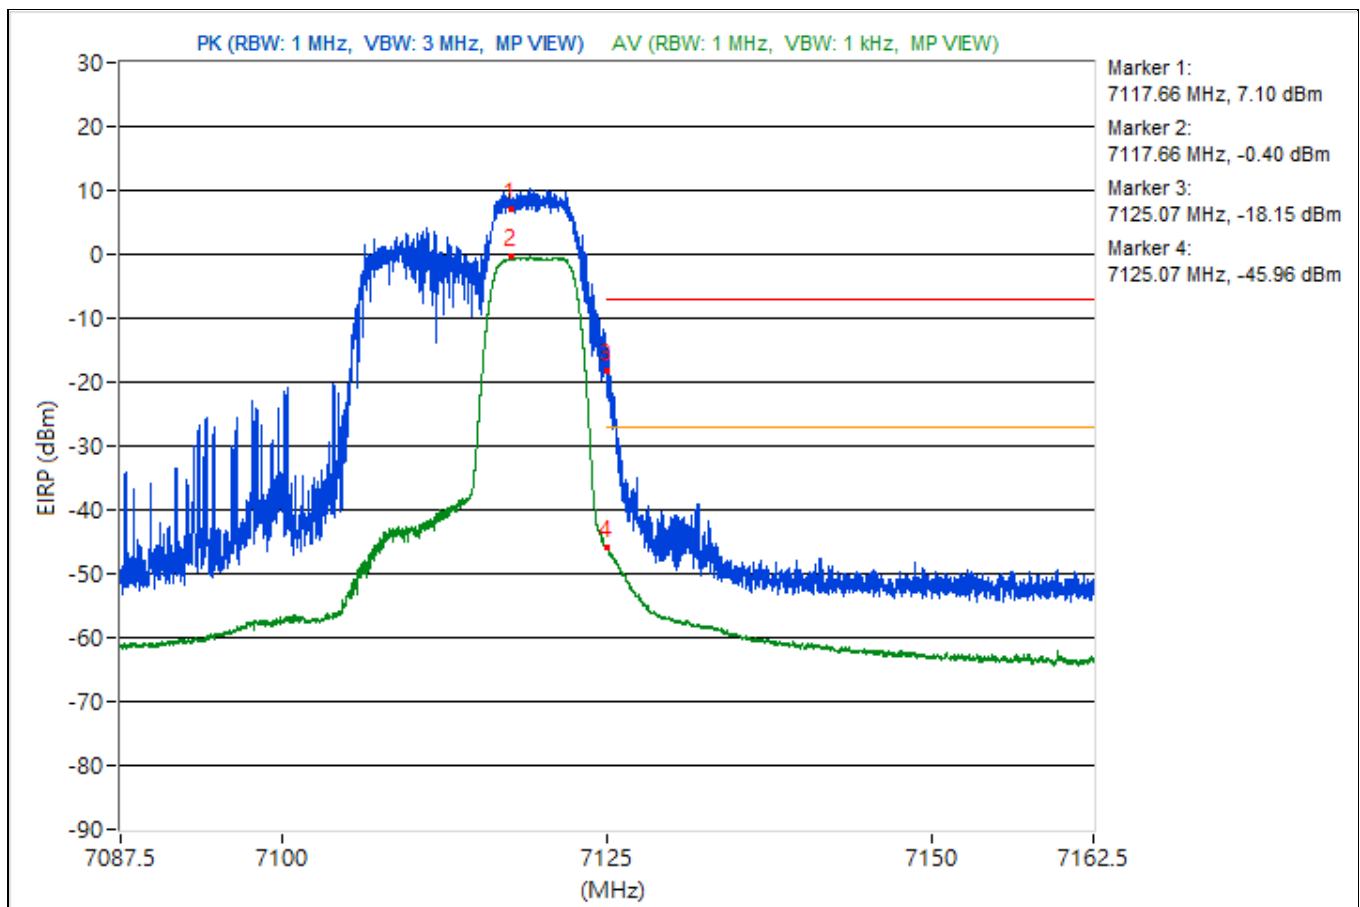


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.87	97.63 PK			-2.39	4.76	2.37
2	*5933.87	91.88 AV			-8.14	4.76	-3.38
3	#5924.98	87.41 PK	88.26	-0.85	-12.61	4.76	-7.85
4	!#5924.98	79.01 AV	68.26	10.75	-21.01	4.76	-16.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

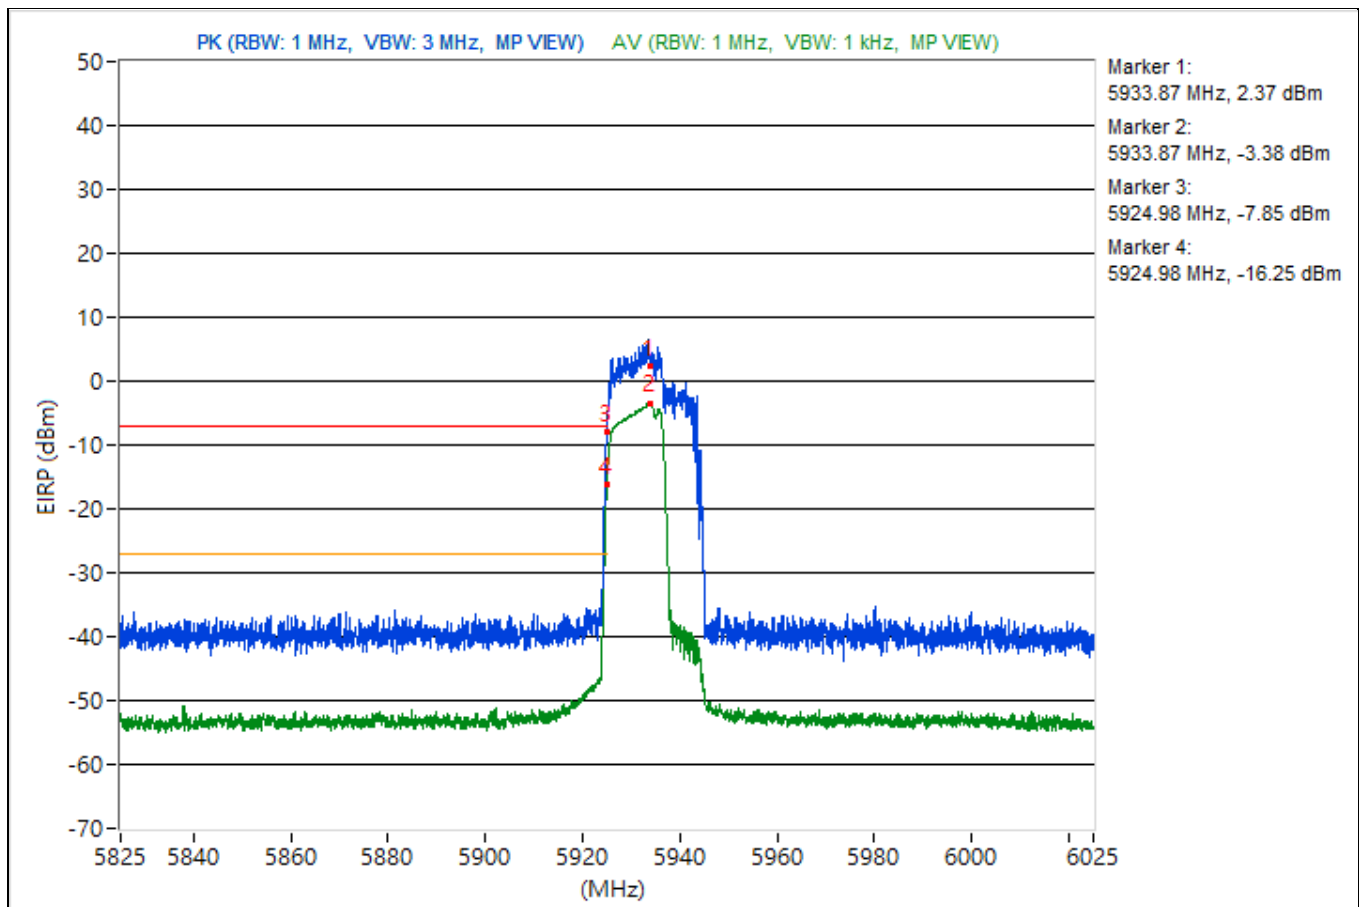


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	49.21 AV	68.2	-18.99	-50.81	4.76	-46.05

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

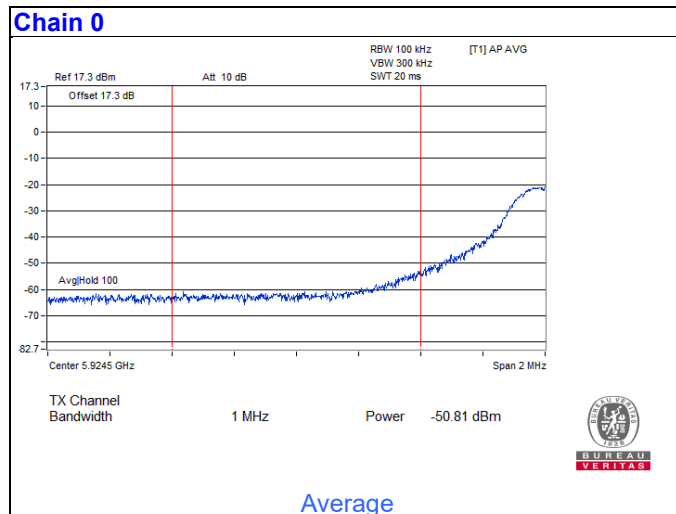


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.93	101.11 PK			1.09	4.76	5.85
2	*5953.93	95.31 AV			-4.71	4.76	0.05
3	#5922.82	47.13 PK	88.26	-41.13	-52.89	4.76	-48.13
4	#5922.82	36.98 AV	68.26	-31.28	-63.04	4.76	-58.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

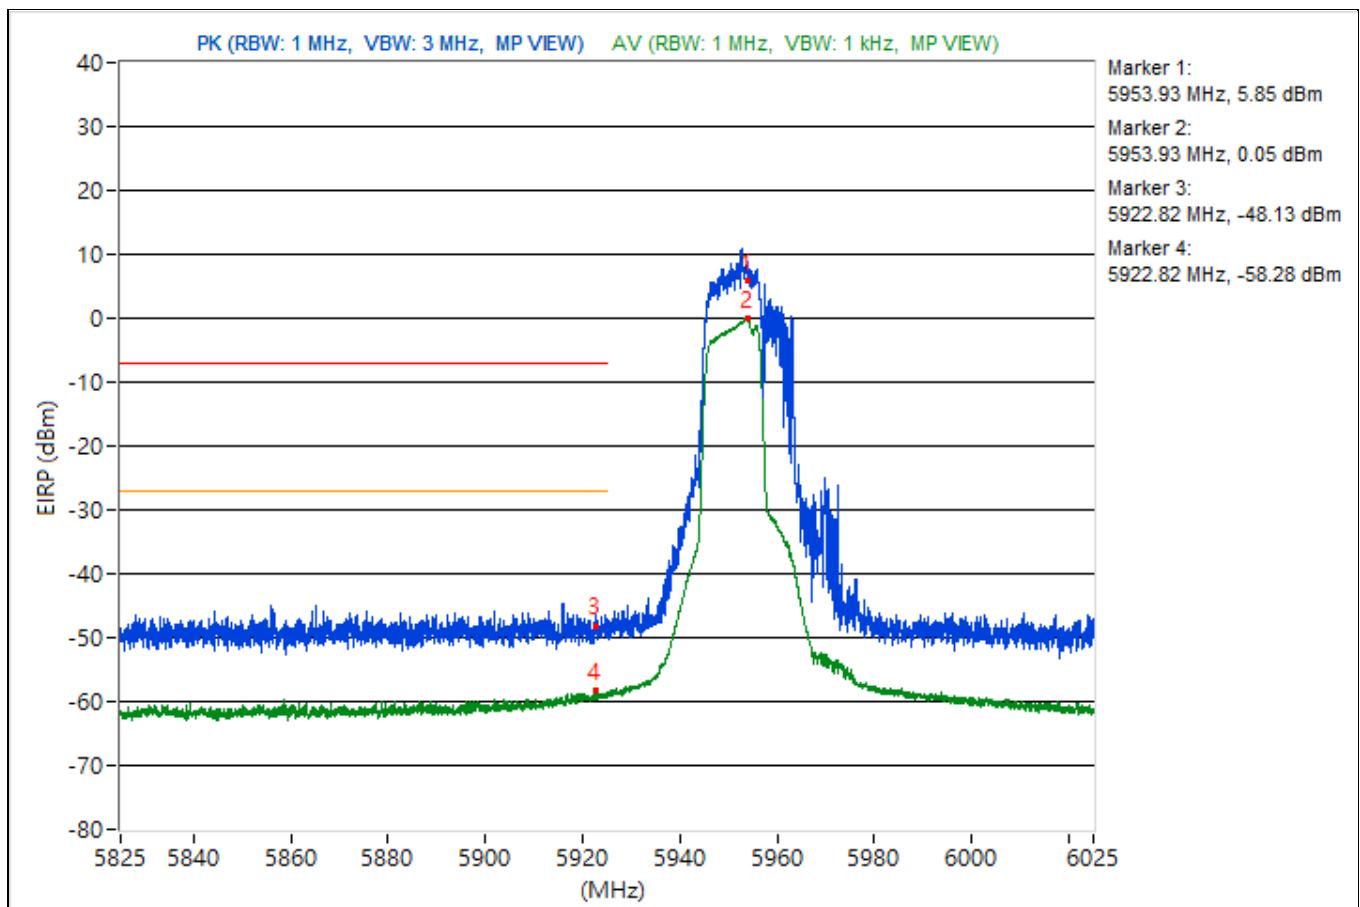


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.23	101.04 PK			1.69	4.09	5.78
2	*7116.23	92.28 AV			-7.07	4.09	-2.98
3	#7125	87.69 PK	88.26	-0.57	-11.66	4.09	-7.57
4	!#7125	79.61 AV	68.26	11.35	-19.74	4.09	-15.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

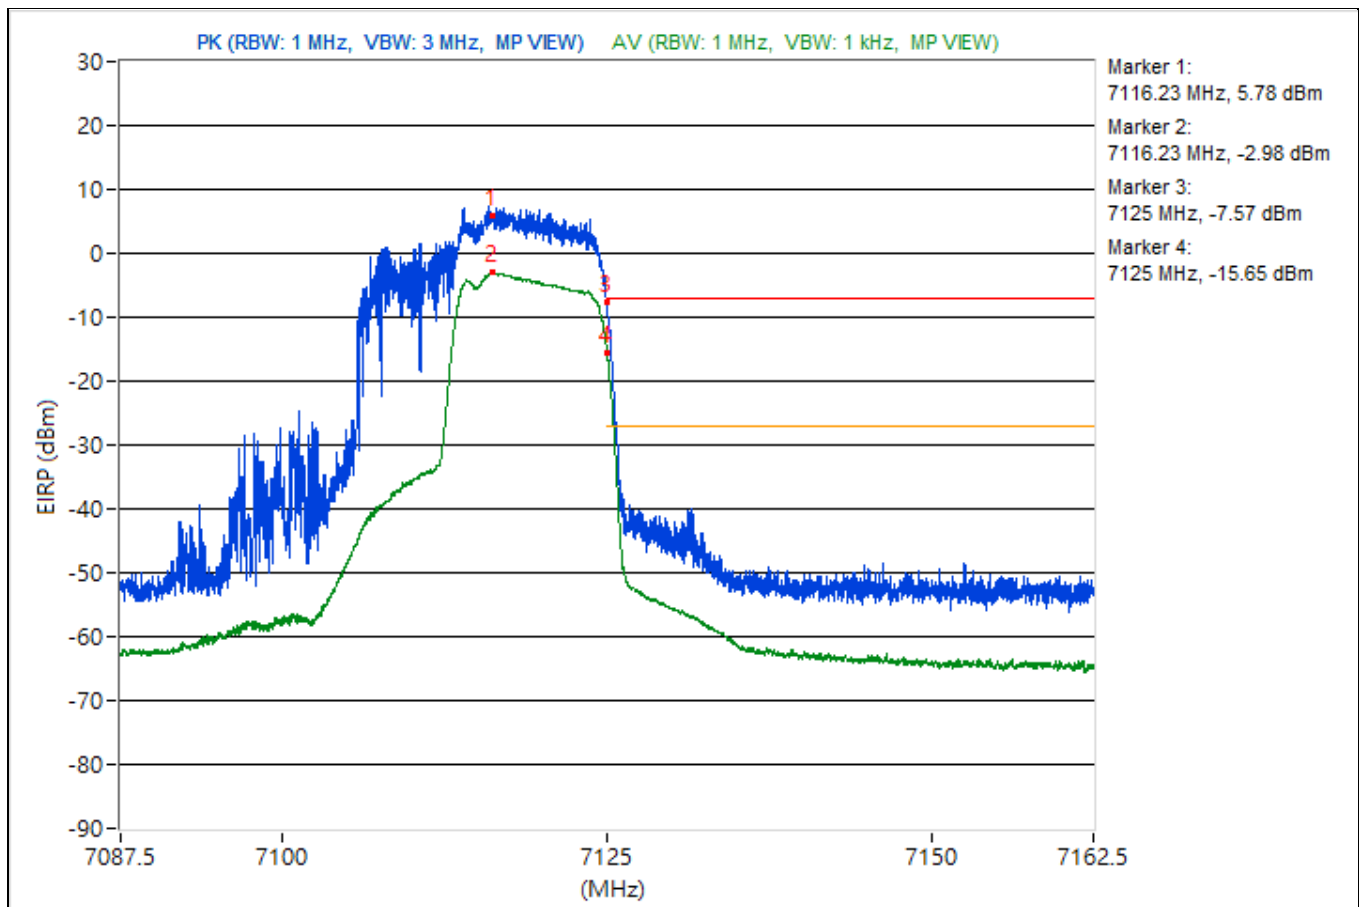


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	46.3 AV	68.2	-21.9	-53.05	4.09	-48.96

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

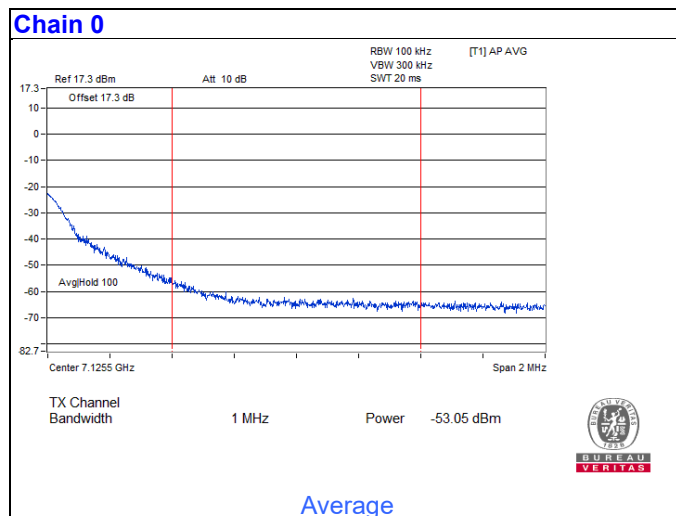


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5987.57	101.97 PK			1.95	4.76	6.71
2	*5987.57	93.84 AV			-6.18	4.76	-1.42
3	#5924.43	52.47 PK	88.26	-35.79	-47.55	4.76	-42.79
4	#5924.43	44.45 AV	68.26	-23.81	-55.57	4.76	-50.81

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

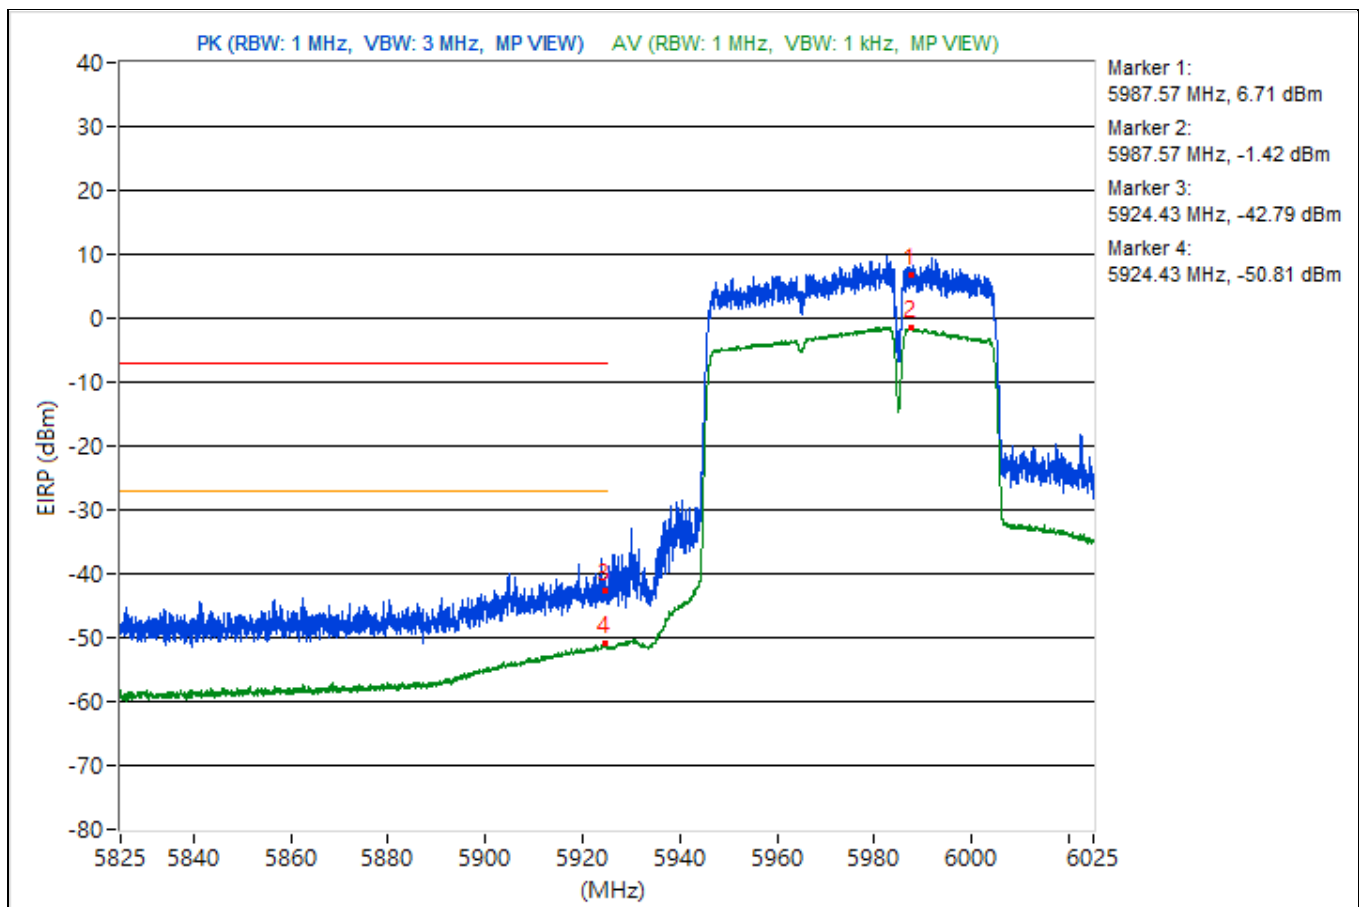


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	6.975 GHz ~ 7.275 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7027.35	103.43 PK			4.08	4.09	8.17
2	*7027.35	94.88 AV			-4.47	4.09	-0.38
3	#7125.68	45.41 PK	88.26	-42.85	-53.94	4.09	-49.85
4	#7125.68	37.57 AV	68.26	-30.69	-61.78	4.09	-57.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

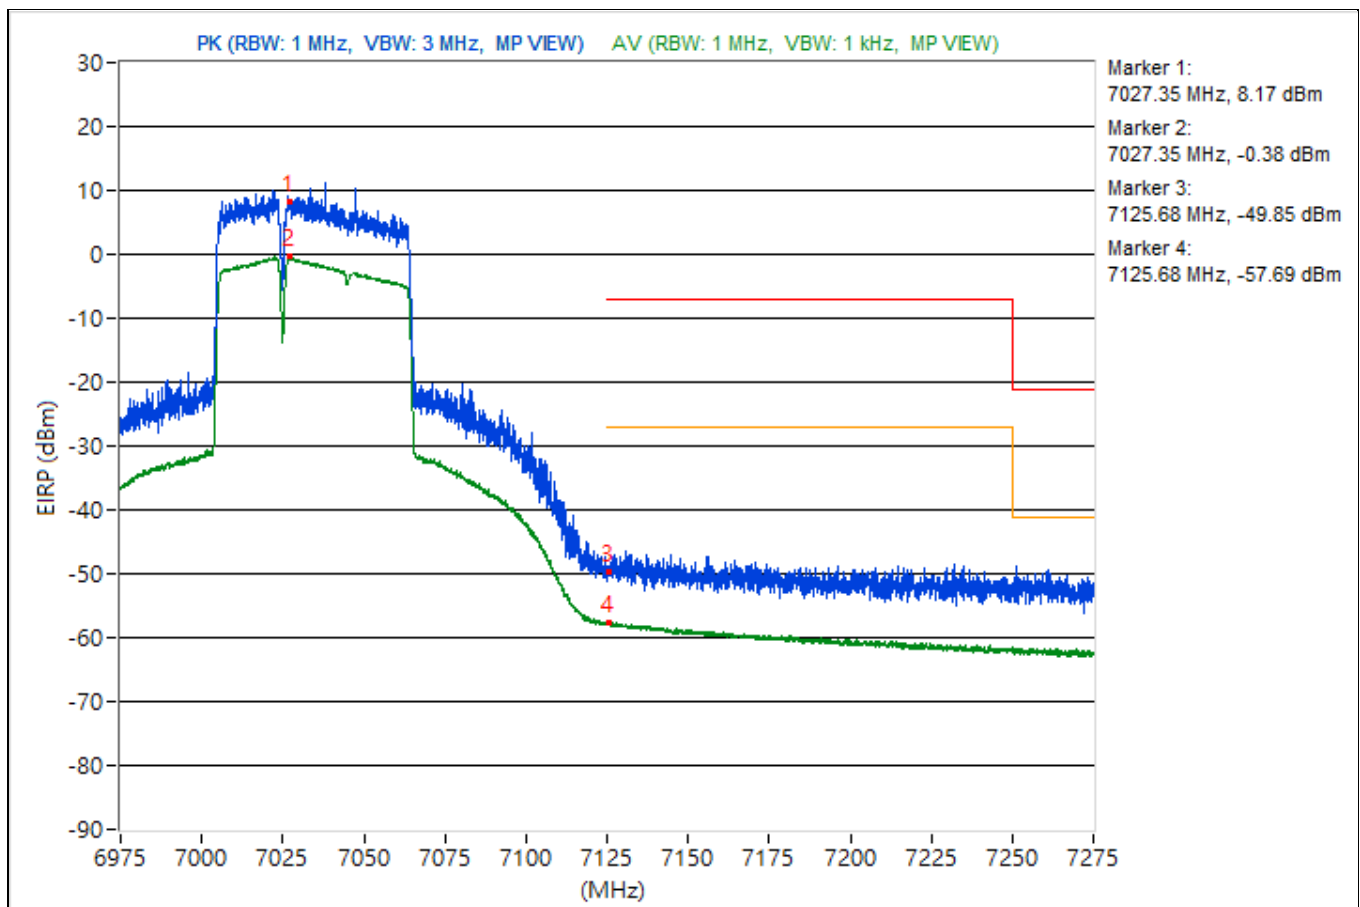


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.5	104.24 PK			4.22	4.76	8.98
2	*6022.5	95.42 AV			-4.6	4.76	0.16
3	#5922.1	61.49 PK	88.26	-26.77	-38.53	4.76	-33.77
4	#5922.1	52.45 AV	68.26	-15.81	-47.57	4.76	-42.81

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

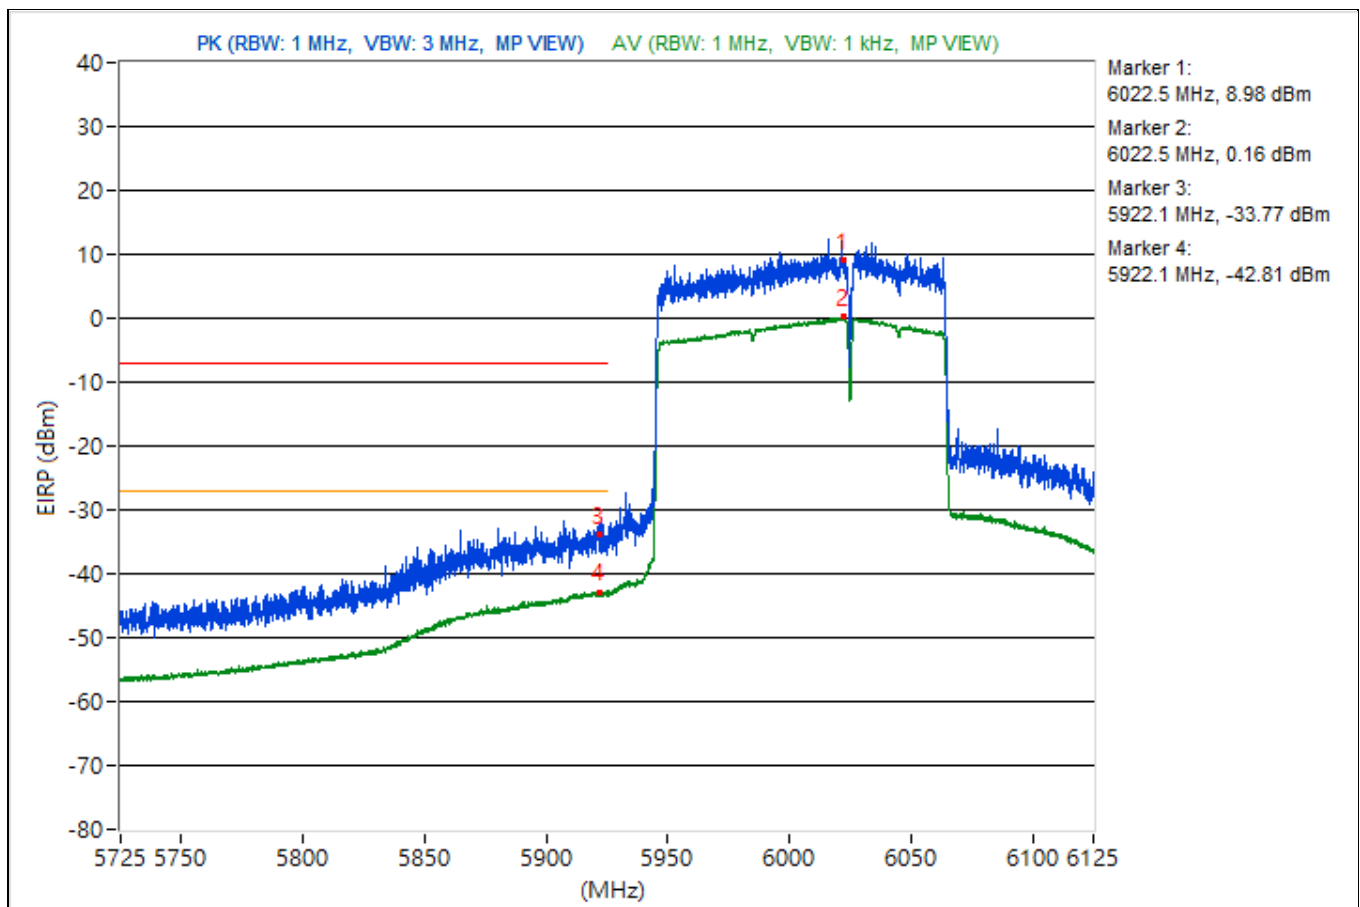


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6982.44	103.71 PK			4.36	4.09	8.45
2	*6982.44	94.15 AV			-5.2	4.09	-1.11
3	#7125.06	62.37 PK	88.26	-25.89	-36.98	4.09	-32.89
4	#7125.06	53.66 AV	68.26	-14.6	-45.69	4.09	-41.6

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

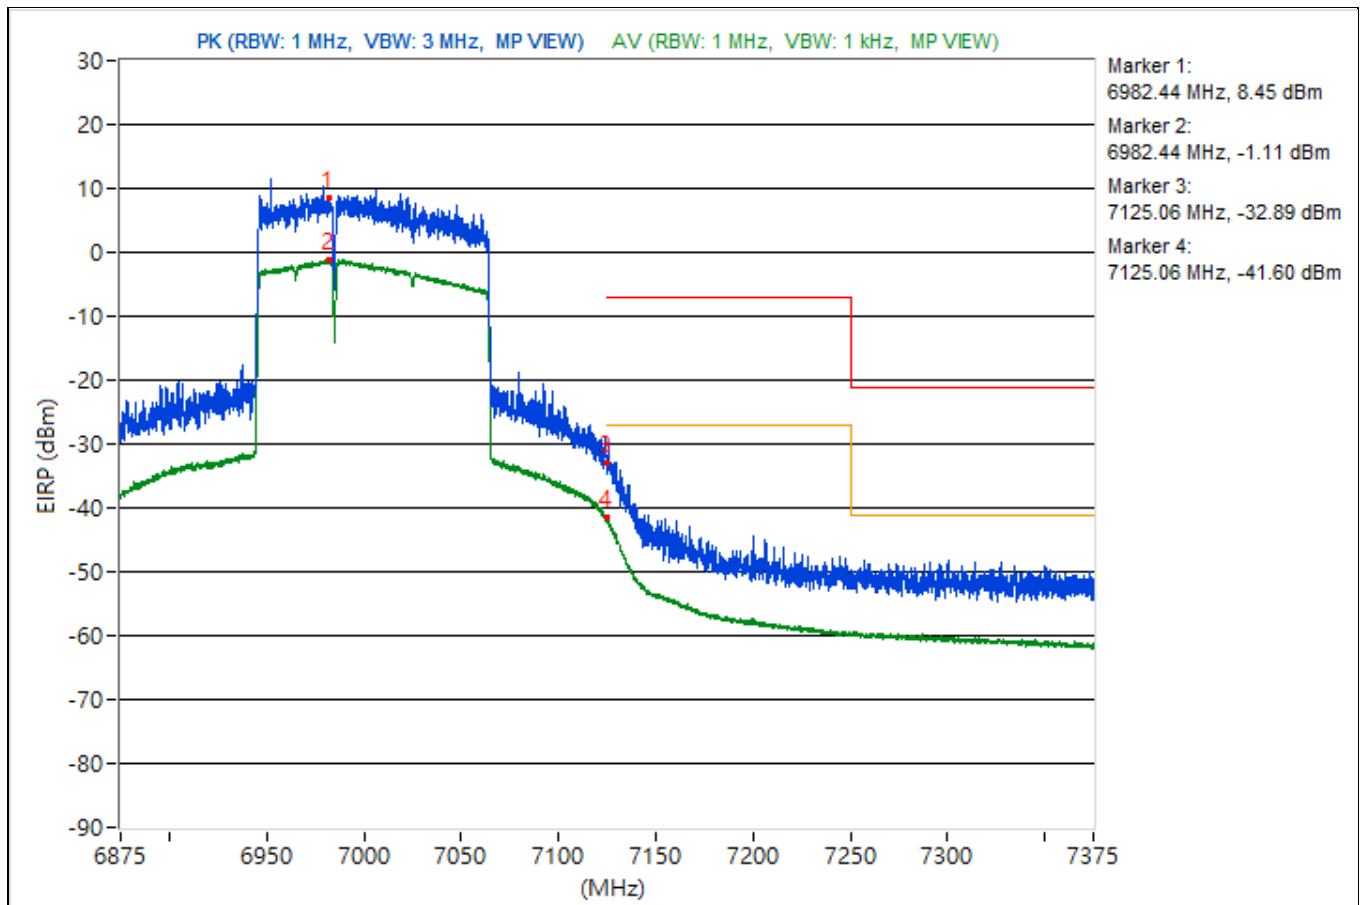


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6020.85	101.95 PK			1.93	4.76	6.69
2	*6020.85	94.15 AV			-5.87	4.76	-1.11
3	#5924.55	61.52 PK	88.26	-26.74	-38.5	4.76	-33.74
4	#5924.55	54 AV	68.26	-14.26	-46.02	4.76	-41.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

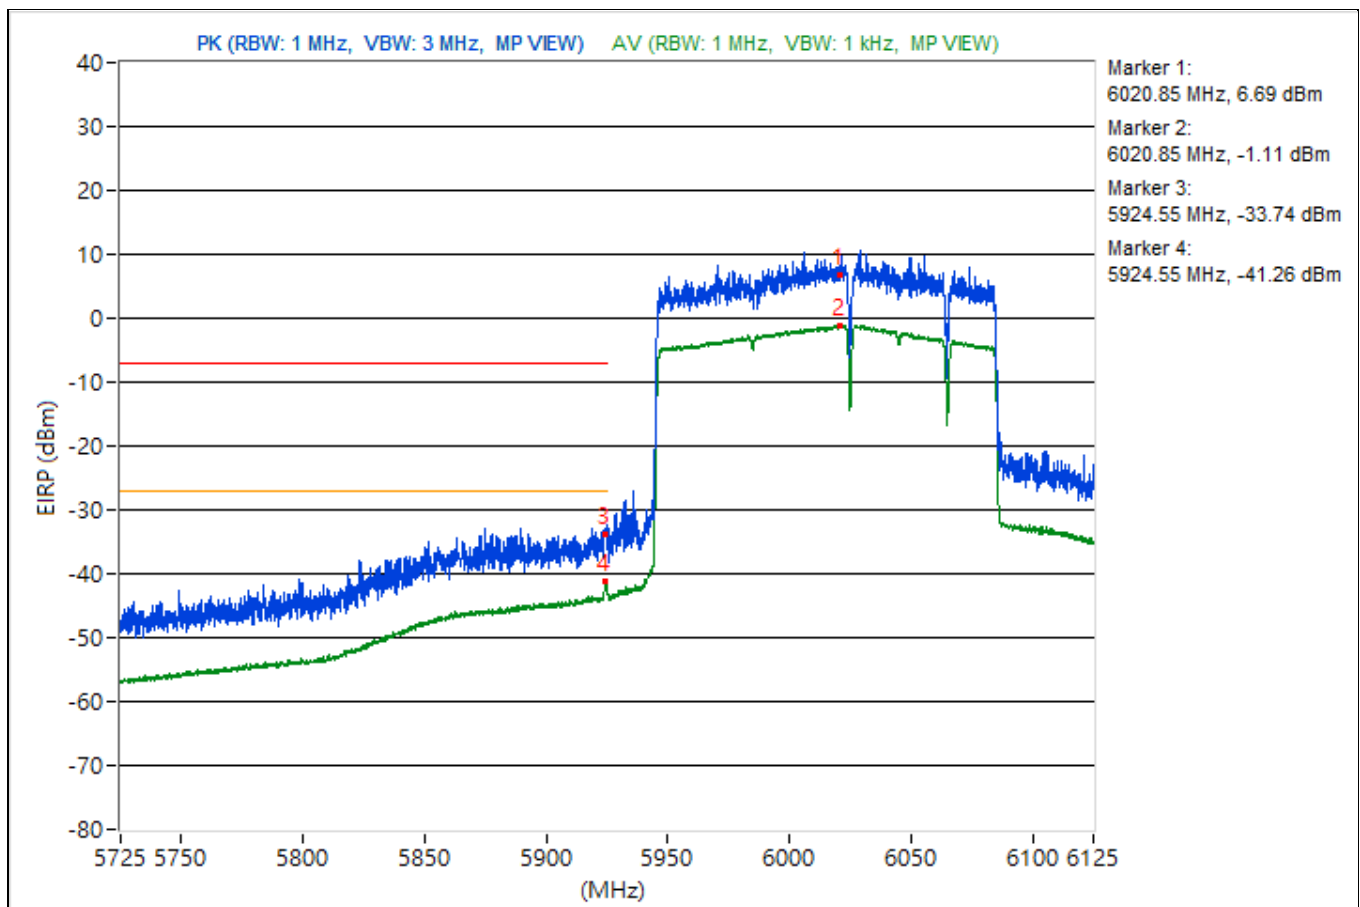


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6982.5	103.45 PK			4.1	4.09	8.19
2	*6982.5	94.62 AV			-4.73	4.09	-0.64
3	#7125.19	63.14 PK	88.26	-25.12	-36.21	4.09	-32.12
4	#7125.19	54.62 AV	68.26	-13.64	-44.73	4.09	-40.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

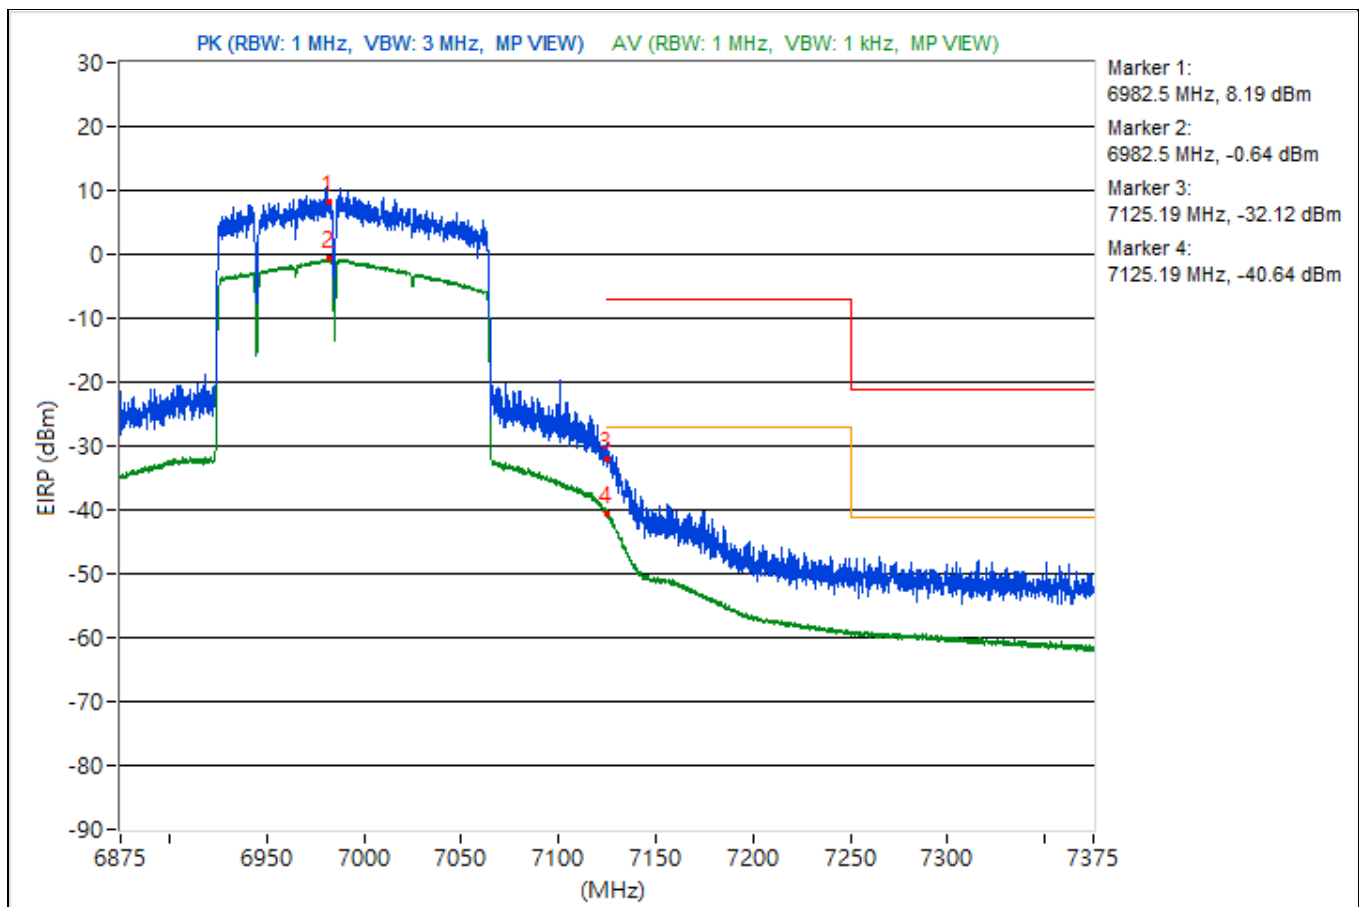

under control of a low-power indoor AP



2Tx

Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3824.81	52.56 PK	74	-21.44	-53.41	-53.89	7.93	-42.7
2	3824.81	41.34 AV	54	-12.66	-64.37	-65.41	7.93	-53.92
3	15367.91	51.38 PK	74	-22.62	-52.86	-58.51	7.93	-43.88
4	15367.91	39.62 AV	54	-14.38	-65.31	-68.38	7.93	-55.64
5	20693.1	52.41 PK	74	-21.59	-54.8	-52.97	7.93	-42.85
6	20693.1	40.96 AV	54	-13.04	-63.99	-66.99	7.93	-54.3
7	23690.3	52.41 PK	74	-21.59	-54.05	-53.54	7.93	-42.85
8	23690.3	41.97 AV	54	-12.03	-63.01	-65.95	7.93	-53.29
9	38647.38	50.58 PK	74	-23.42	-56.08	-55.21	7.93	-44.68
10	38647.38	37.96 AV	54	-16.04	-70.19	-66.9	7.93	-57.3


Note: Margin value = Emission Level - Limit value

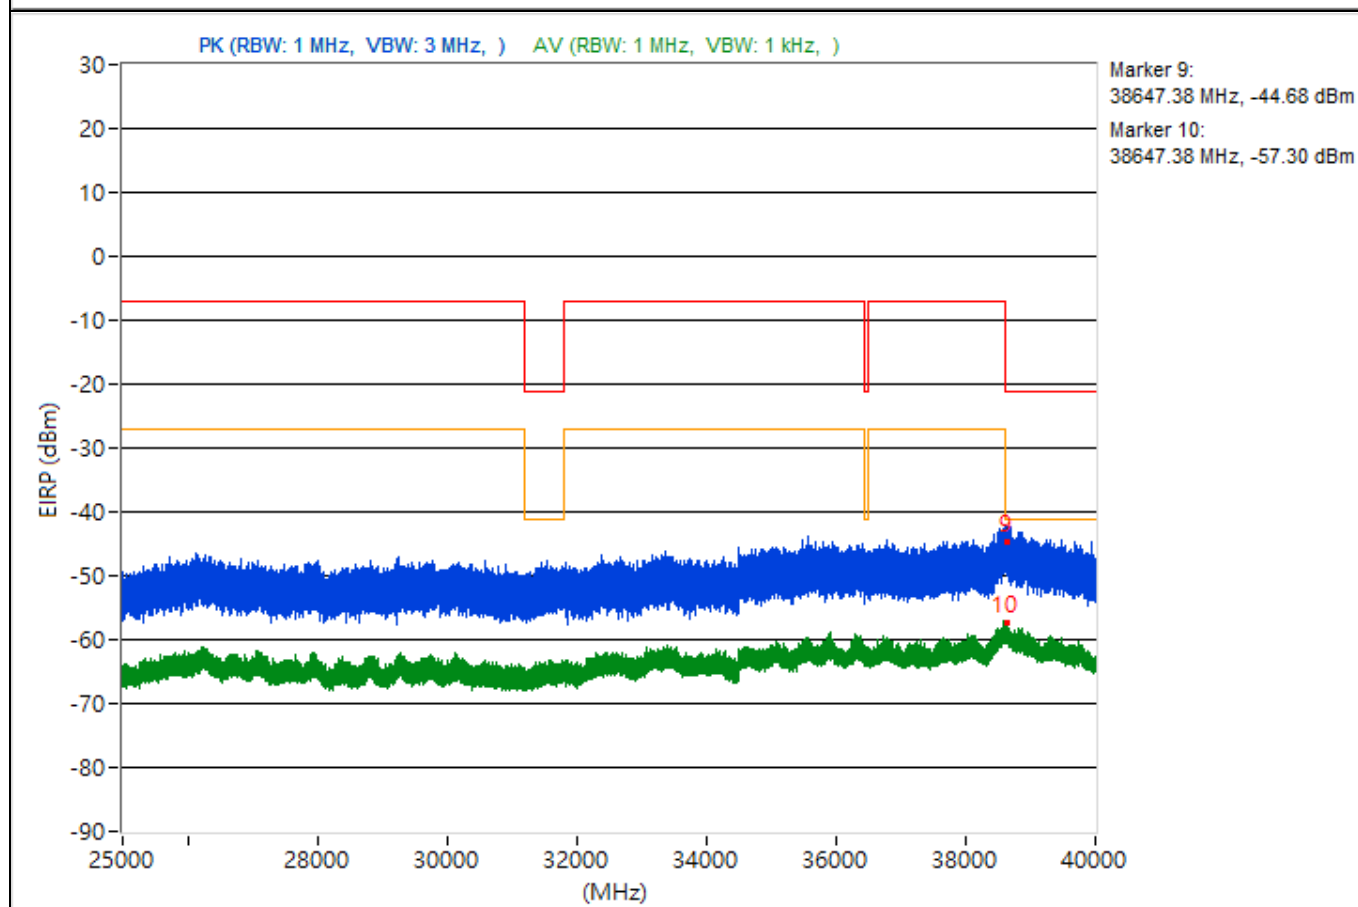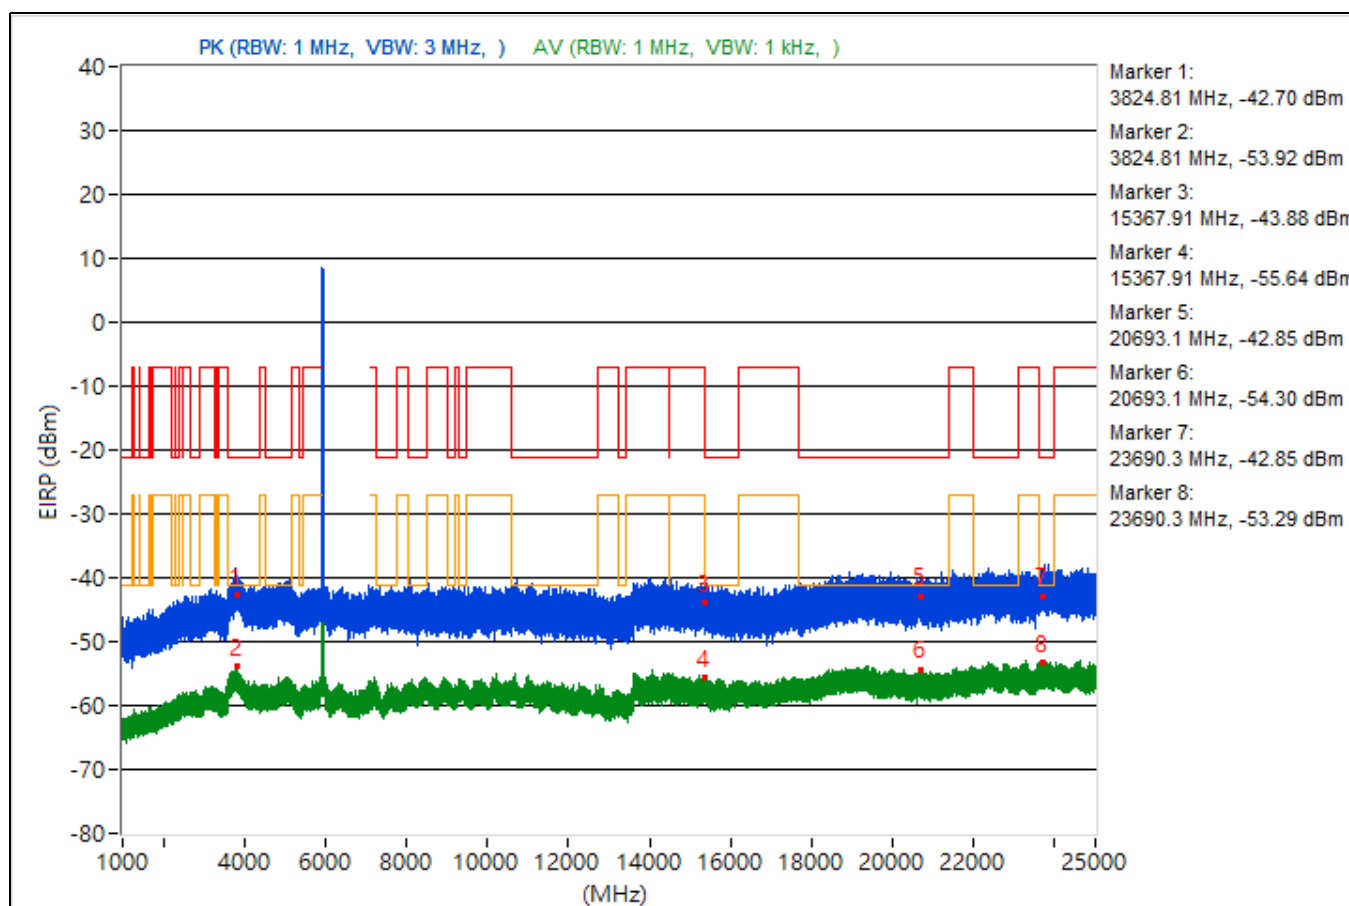


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.38	53.09 PK	74	-20.91	-54.62	-51.98	7.93	-42.17
2	3792.38	40.74 AV	54	-13.26	-67.42	-64.11	7.93	-54.52
3	14483.2	52.06 PK	74	-21.94	-52.22	-57.66	7.93	-43.2
4	14483.2	40.67 AV	54	-13.33	-65.34	-65.73	7.93	-54.59
5	19542.1	49.68 PK	74	-24.32	-55.69	-57.53	7.93	-45.58
6	19542.1	41.54 AV	54	-12.46	-65.7	-63.82	7.93	-53.72
7	22404.3	52.02 PK	74	-21.98	-53.41	-55.12	7.93	-43.24
8	22404.3	42.56 AV	54	-11.44	-64.39	-63	7.93	-52.7
9	38657.24	50.2 PK	74	-23.8	-56.22	-55.79	7.93	-45.06
10	38657.24	37.72 AV	54	-16.28	-66.77	-71.34	7.93	-57.54

Note: Margin value = Emission Level - Limit value

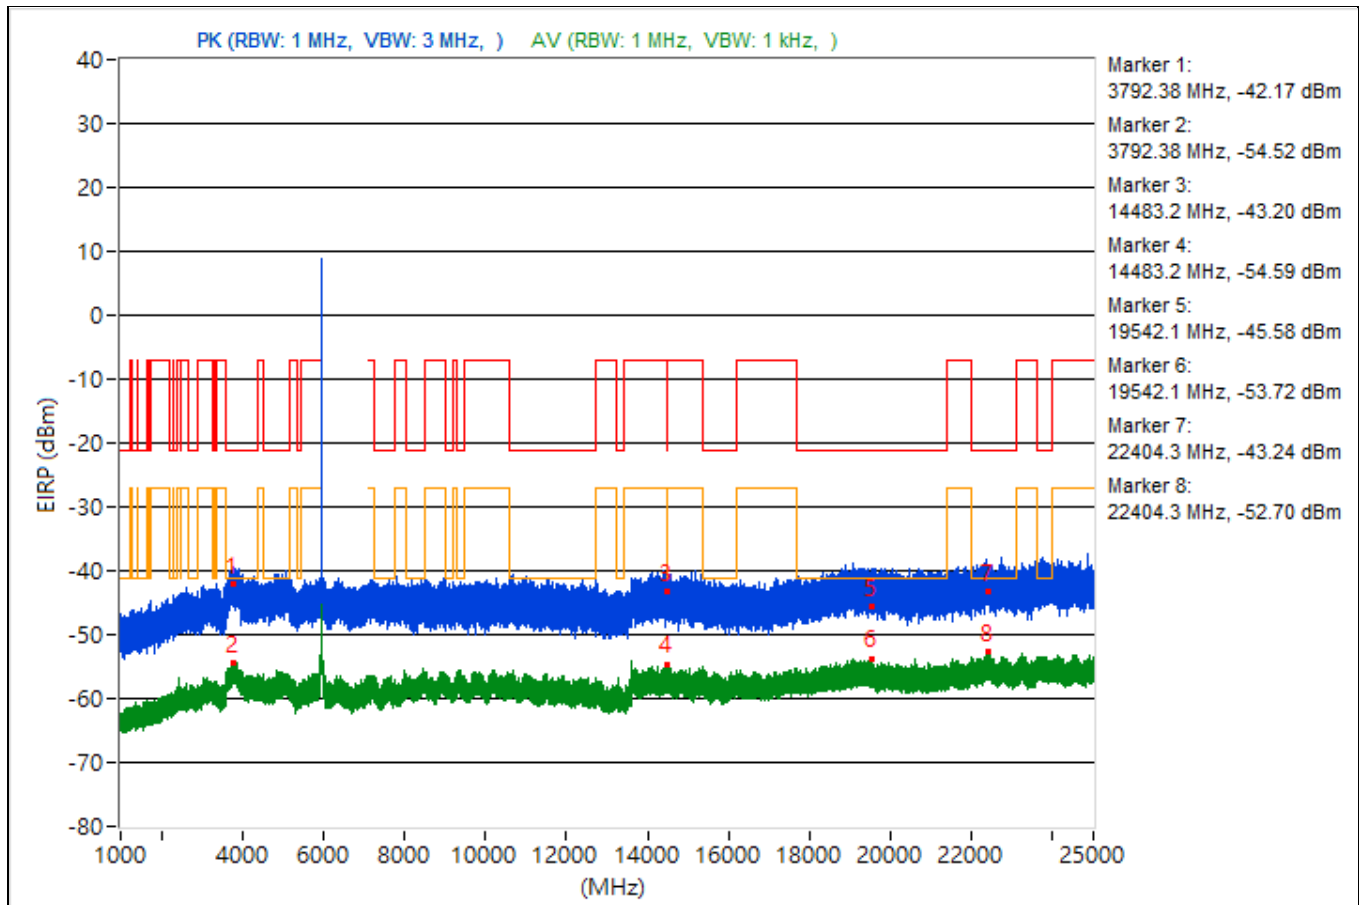


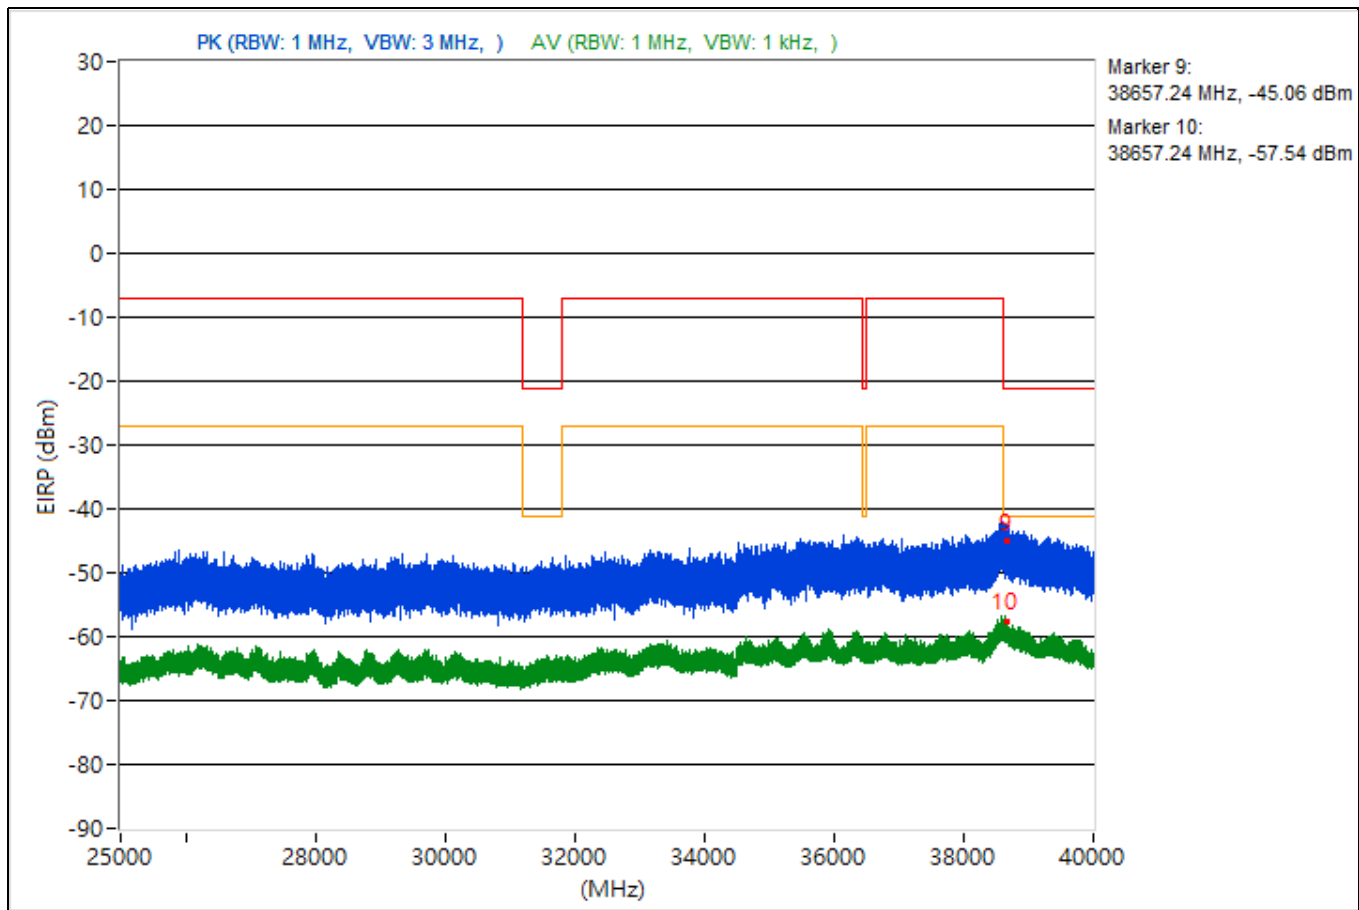


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3752.48	53.75 PK	74	-20.25	-51.98	-52.98	7.93	-41.51
2	3752.48	40.66 AV	54	-13.34	-64.47	-66.96	7.93	-54.6
3	14477.87	51.44 PK	74	-22.56	-53.33	-56.93	7.93	-43.82
4	14477.87	40.58 AV	54	-13.42	-64.67	-66.85	7.93	-54.68
5	19392.5	50.06 PK	74	-23.94	-56.67	-55.67	7.93	-45.2
6	19392.5	41.36 AV	54	-12.64	-63.45	-66.91	7.93	-53.9
7	22412.5	53.41 PK	74	-20.59	-51.89	-53.94	7.93	-41.85
8	22412.5	42.29 AV	54	-11.71	-62.76	-65.47	7.93	-52.97
9	38616.44	50.07 PK	74	-23.93	-56.83	-55.53	7.93	-45.19
10	38616.44	37.79 AV	54	-16.21	-67.31	-69.87	7.93	-57.47

Note: Margin value = Emission Level - Limit value

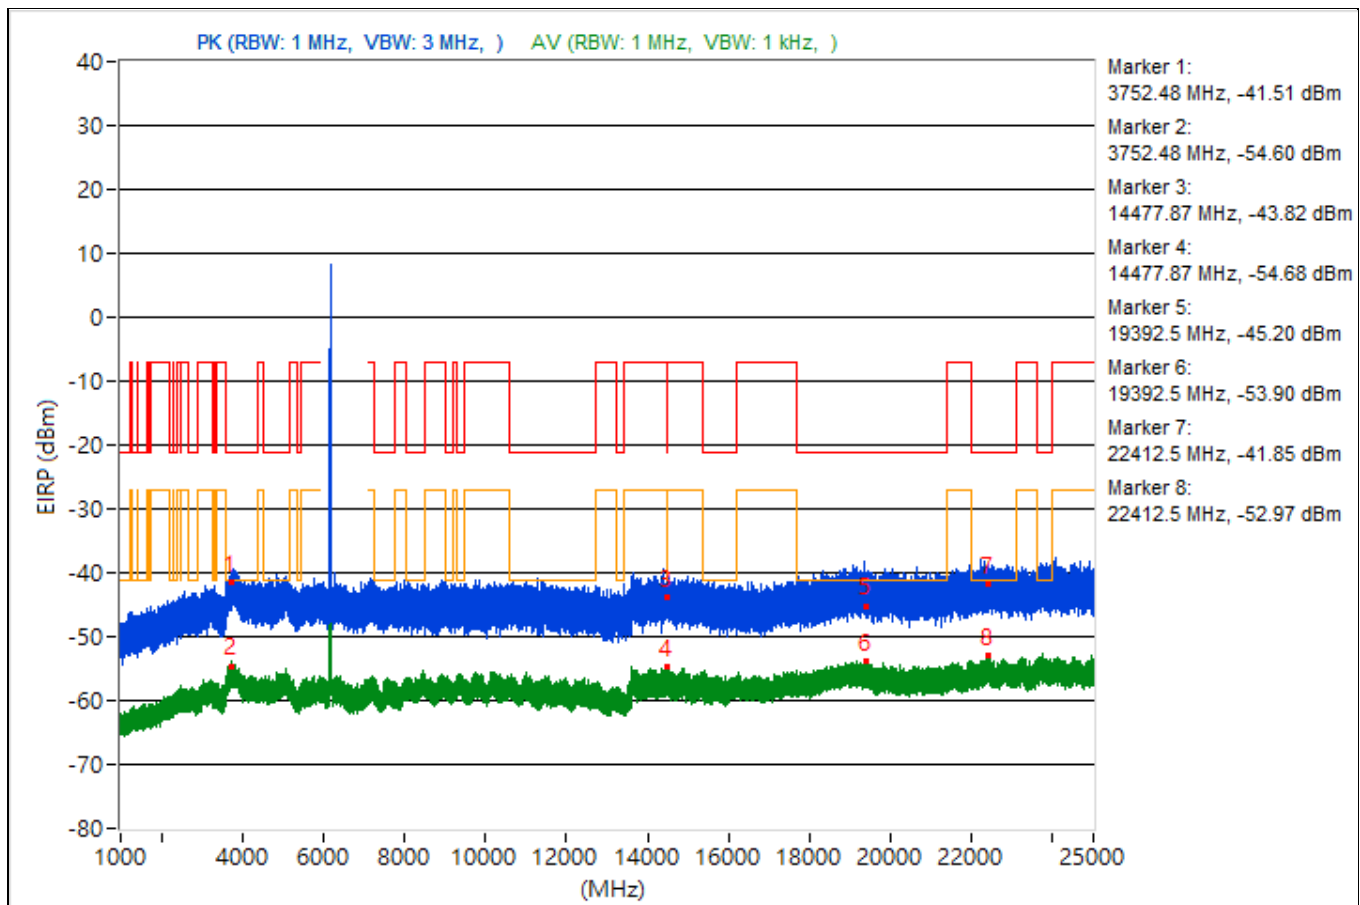


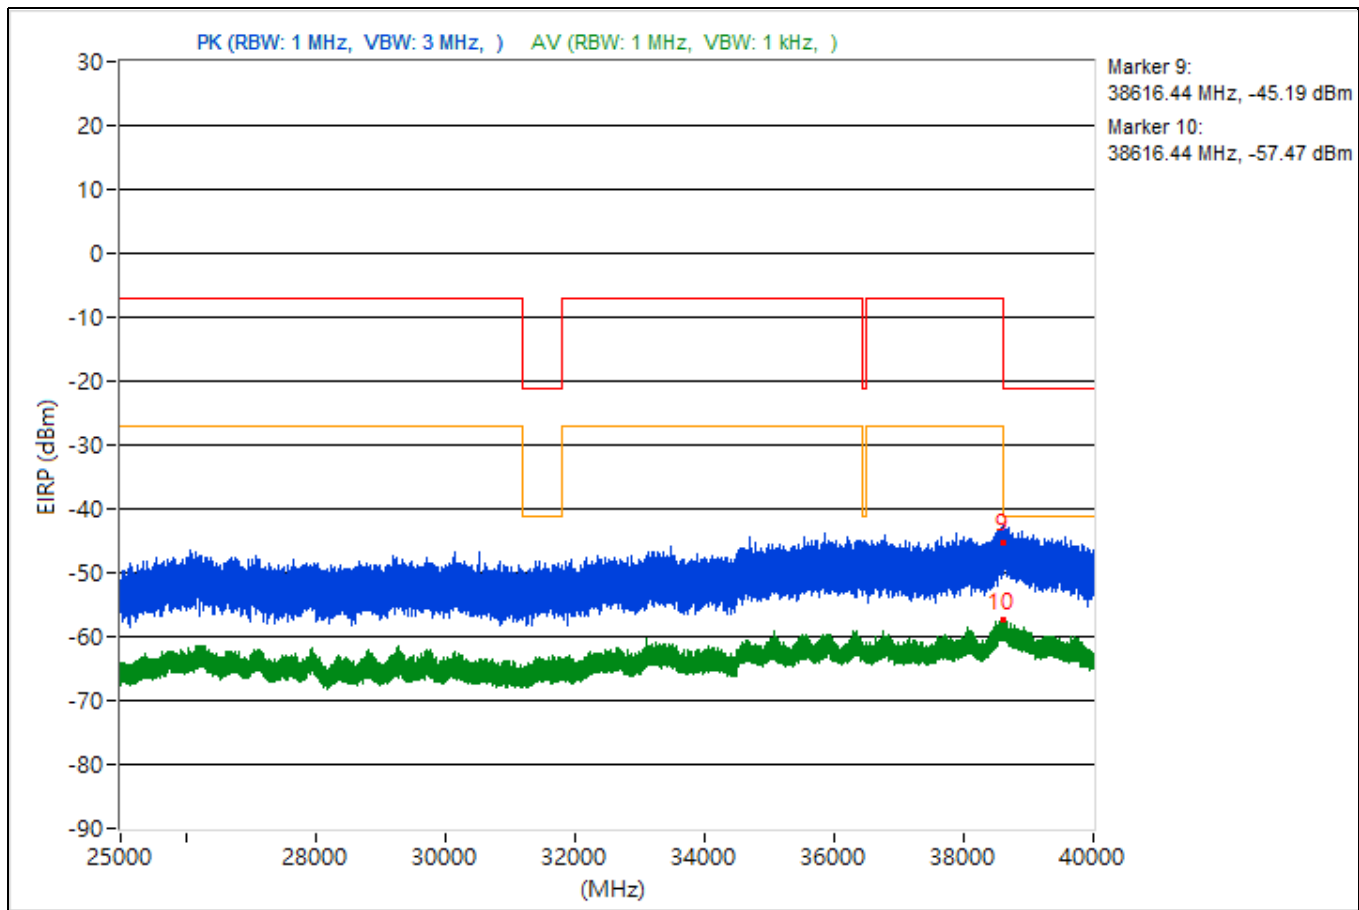


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.43	54.7 PK	74	-19.3	-51.69	-51.31	7.93	-40.56
2	3818.43	41.1 AV	54	-12.9	-64.48	-65.82	7.93	-54.16
3	14481.16	50.75 PK	74	-23.25	-56.2	-54.81	7.93	-44.51
4	14481.16	39.65 AV	54	-14.35	-68.19	-65.36	7.93	-55.61
5	19257.4	54.89 PK	74	-19.11	-49.08	-56.17	7.93	-40.37
6	19257.4	41.4 AV	54	-12.6	-63.92	-65.9	7.93	-53.86
7	23706.3	52.25 PK	74	-21.75	-54.99	-53.11	7.93	-43.01
8	23706.3	41.59 AV	54	-12.41	-62.8	-67.77	7.93	-53.67
9	38610.22	48.77 PK	74	-25.23	-59.02	-56.27	7.93	-46.49
10	38610.22	38.25 AV	54	-15.75	-67.2	-68.87	7.93	-57.01

Note: Margin value = Emission Level - Limit value

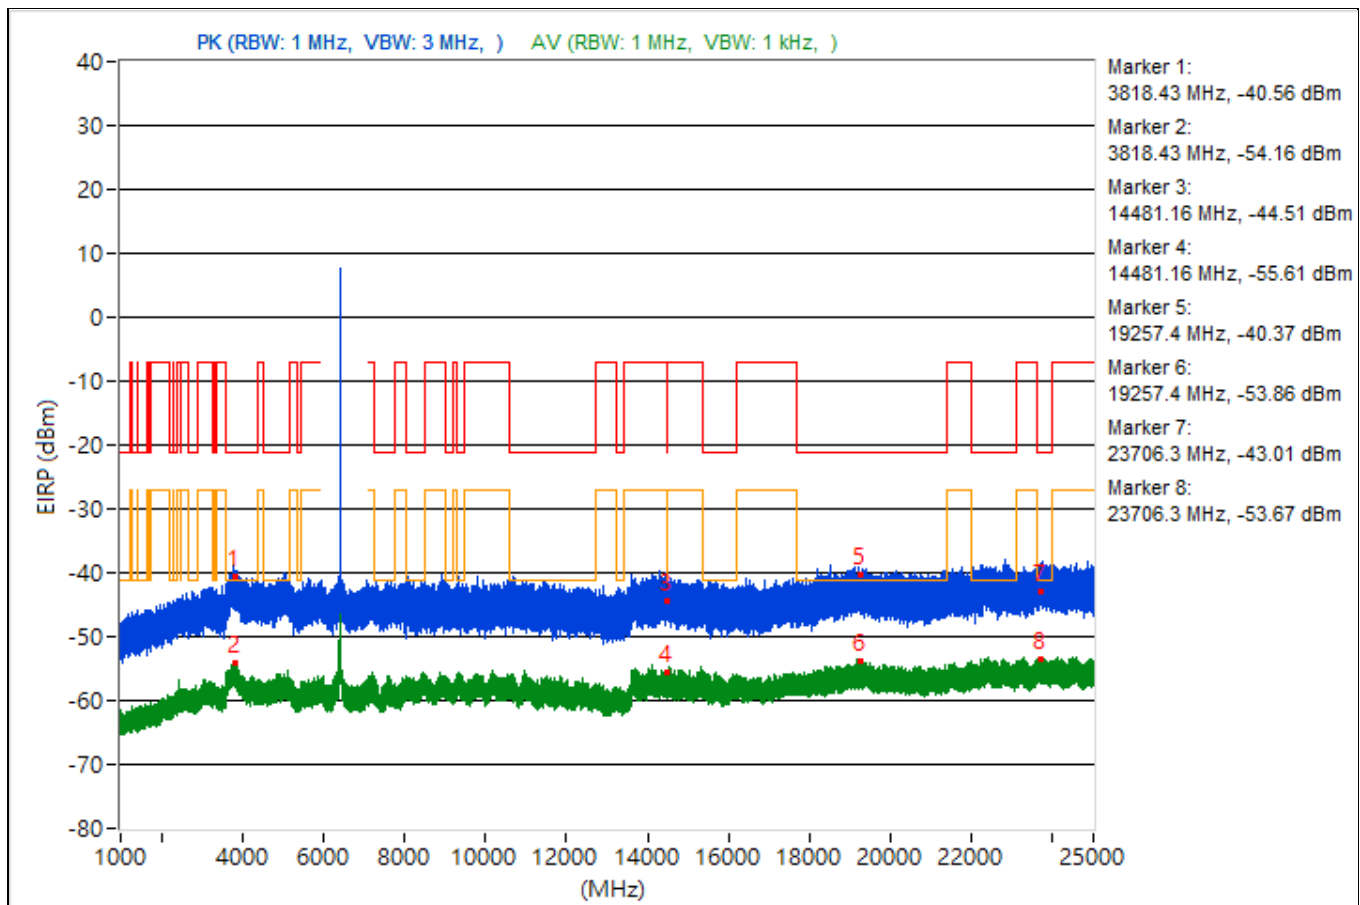


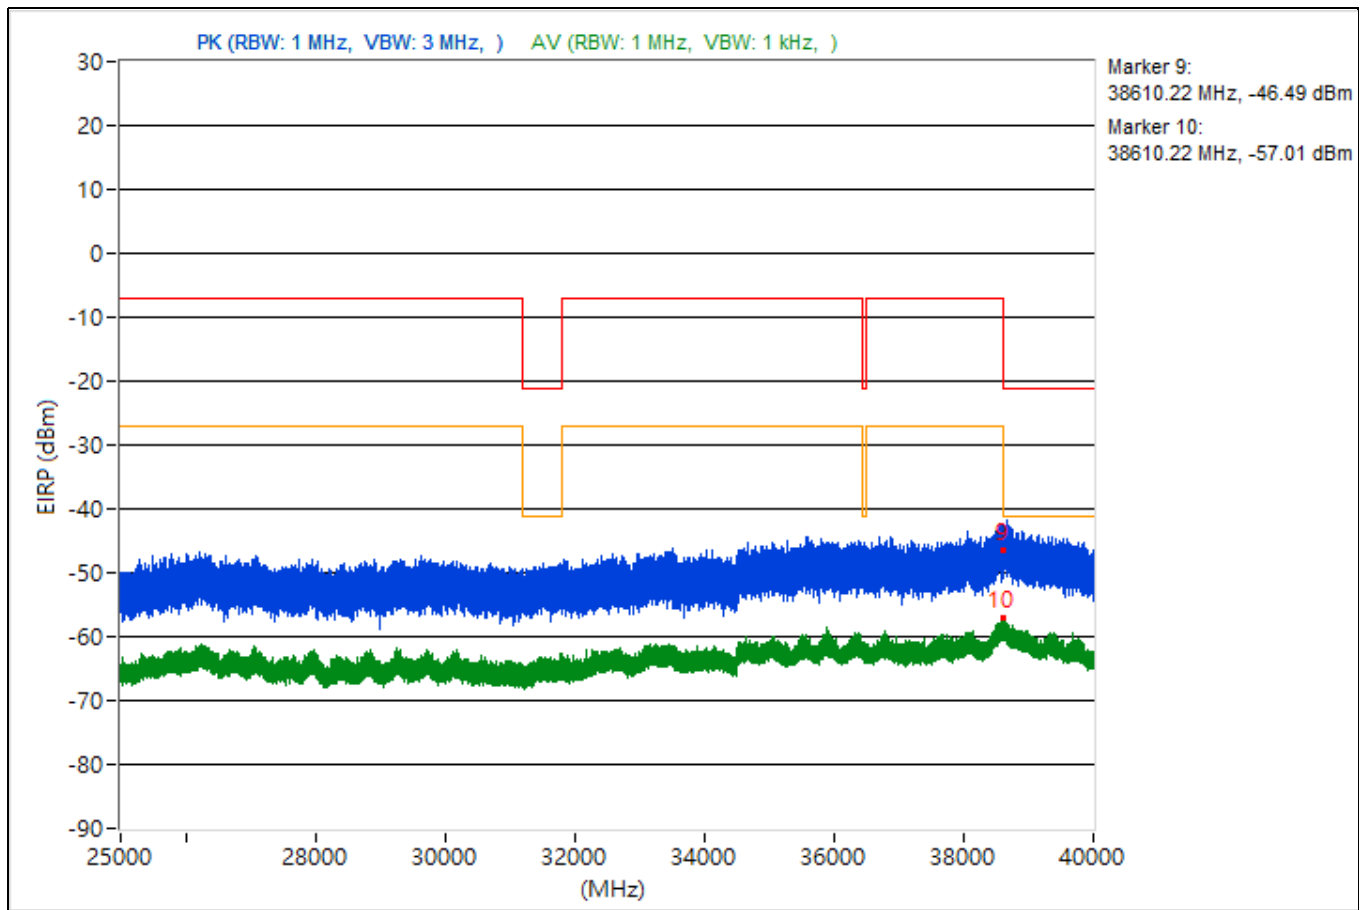


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.81	51.41 PK	74	-22.59	-57.09	-53.29	7.93	-43.85
2	3817.81	41.47 AV	54	-12.53	-66.63	-63.42	7.93	-53.79
3	14496.8	51.24 PK	74	-22.76	-55.09	-54.84	7.93	-44.02
4	14496.8	40.07 AV	54	-13.93	-65.17	-67.36	7.93	-55.19
5	19067.3	54.37 PK	74	-19.63	-49.96	-55.15	7.93	-40.89
6	19067.3	41.17 AV	54	-12.83	-66.37	-64	7.93	-54.09
7	23671	53.5 PK	74	-20.5	-55.7	-50.95	7.93	-41.76
8	23671	42.33 AV	54	-11.67	-64.37	-63.43	7.93	-52.93
9	38605.6	49.18 PK	74	-24.82	-59.6	-55.42	7.93	-46.08
10	38605.6	37.47 AV	54	-16.53	-70.41	-67.52	7.93	-57.79

Note: Margin value = Emission Level - Limit value

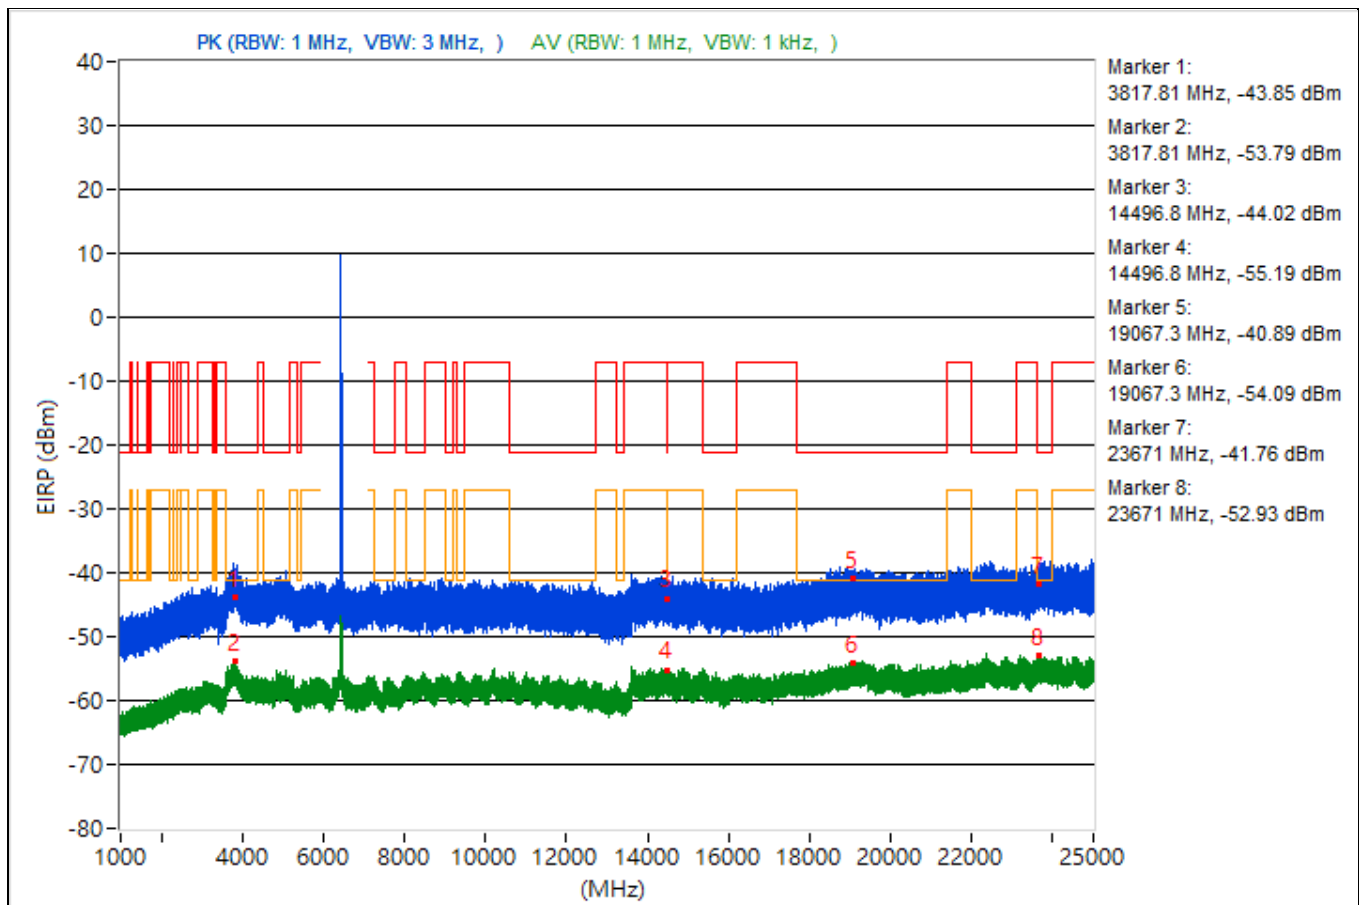


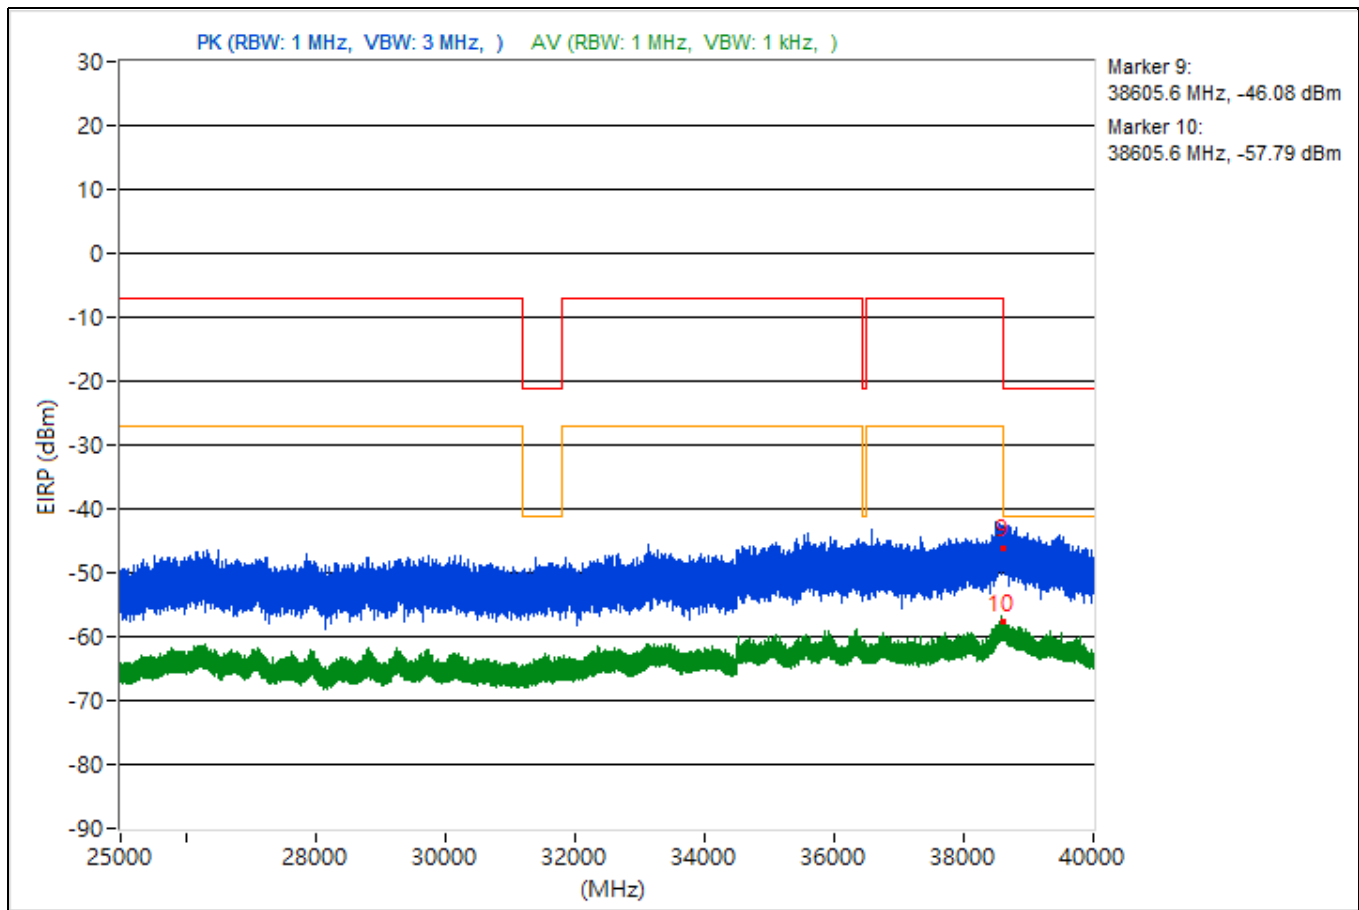


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.38	51.54 PK	74	-22.46	-54.19	-55.2	7.93	-43.72
2	3785.38	40.77 AV	54	-13.23	-66.78	-64.4	7.93	-54.49
3	15380.89	50.2 PK	74	-23.8	-55.99	-56.02	7.93	-45.06
4	15380.89	40.01 AV	54	-13.99	-67.89	-64.97	7.93	-55.25
5	19090.2	53.08 PK	74	-20.92	-53.63	-52.65	7.93	-42.18
6	19090.2	41.22 AV	54	-12.78	-66.97	-63.62	7.93	-54.04
7	23753.2	52.9 PK	74	-21.1	-53.2	-53.39	7.93	-42.36
8	23753.2	42.74 AV	54	-11.26	-62.69	-64.4	7.93	-52.52
9	38658.67	48.45 PK	74	-25.55	-61.56	-55.75	7.93	-46.81
10	38658.67	37.14 AV	54	-16.86	-67.78	-70.9	7.93	-58.12

Note: Margin value = Emission Level - Limit value

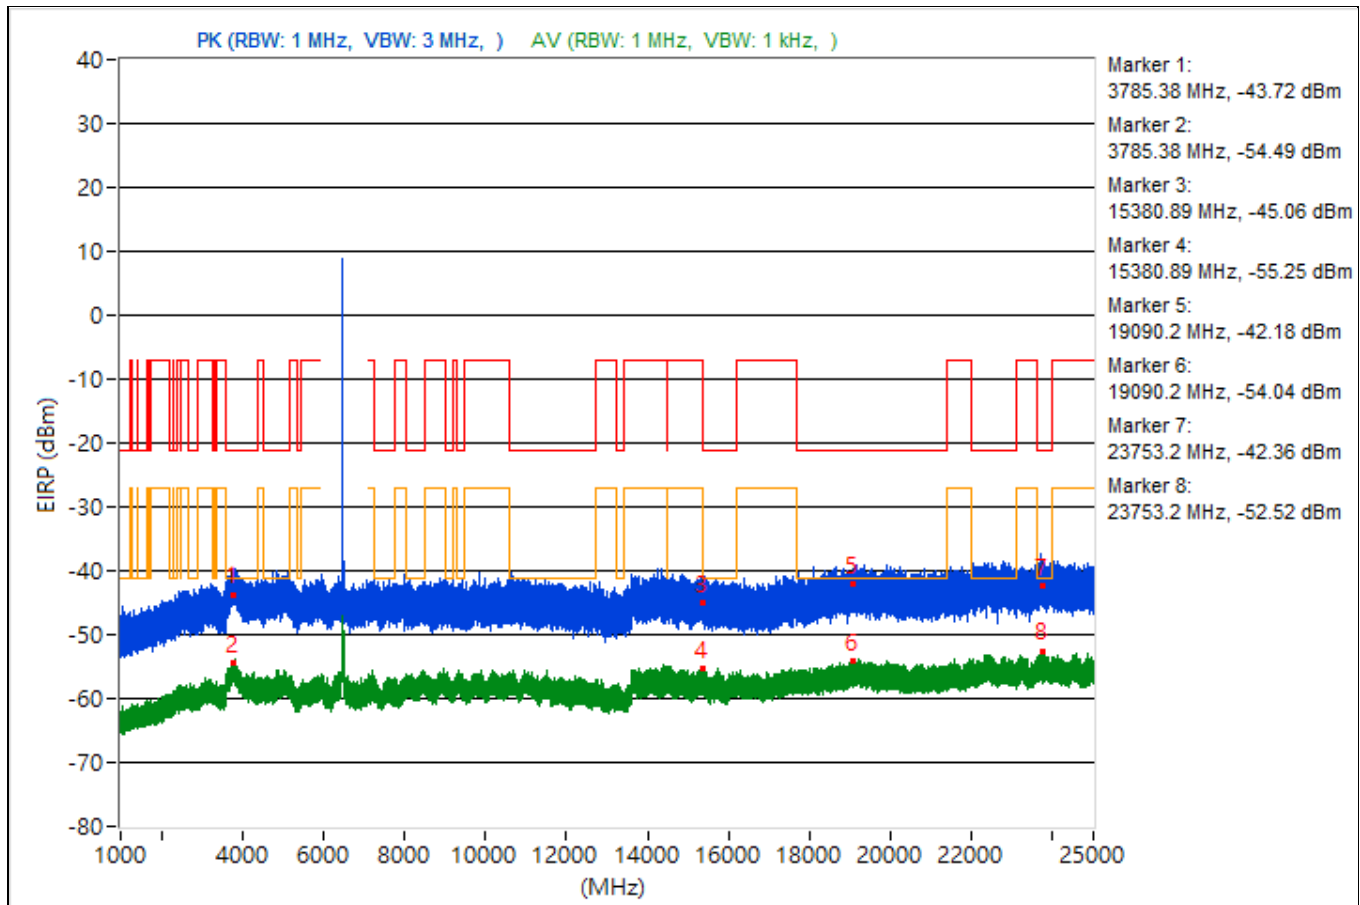


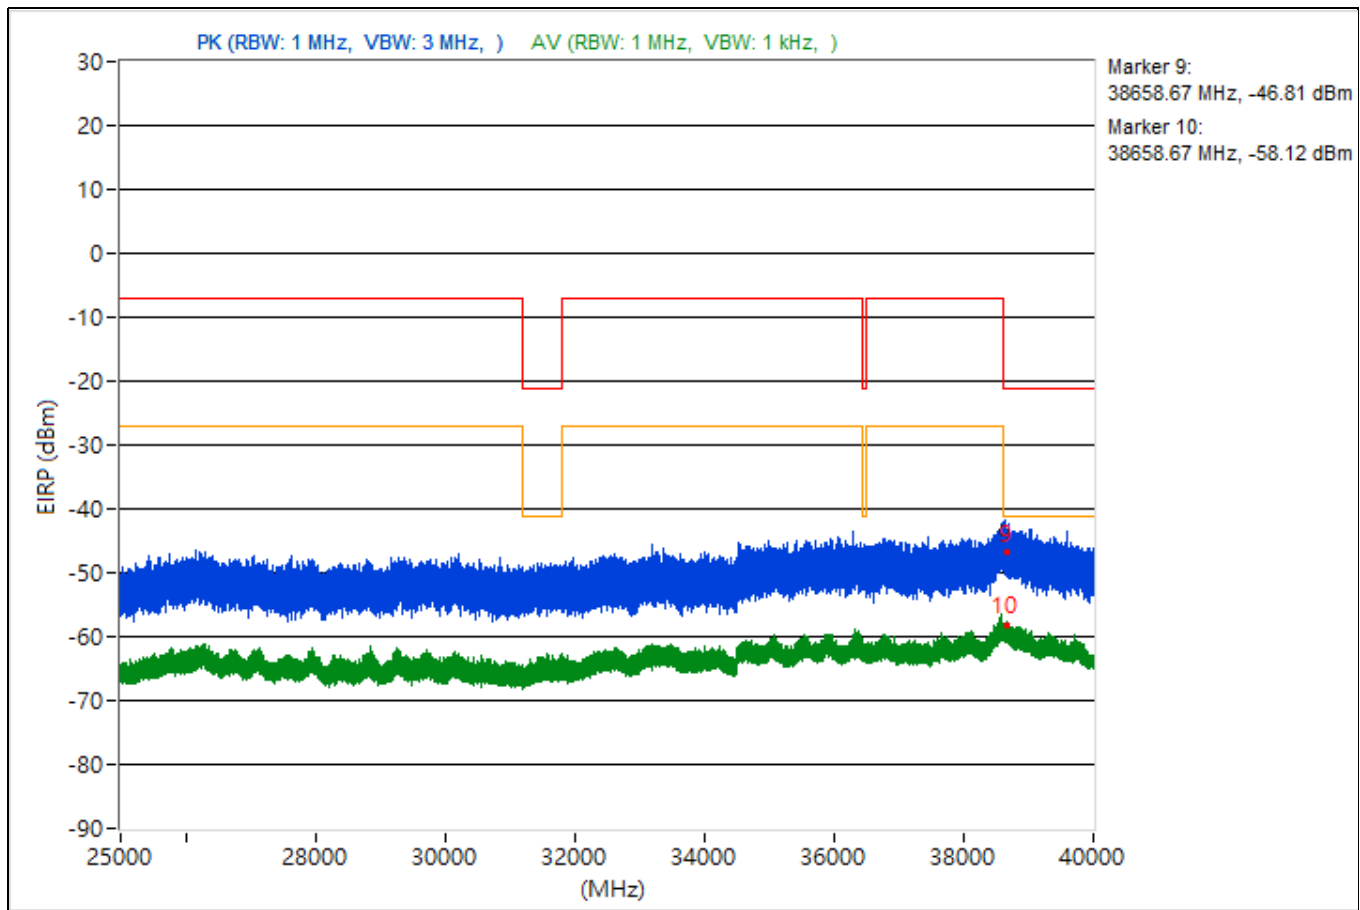


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3780.94	52.67 PK	74	-21.33	-53.57	-53.5	7.93	-42.59
2	3780.94	40.72 AV	54	-13.28	-63.96	-67.84	7.93	-54.54
3	14494.58	48.15 PK	74	-25.85	-57.29	-58.96	7.93	-47.11
4	14494.58	40.28 AV	54	-13.72	-66.46	-65.44	7.93	-54.98
5	19104.7	53.64 PK	74	-20.36	-55.3	-50.89	7.93	-41.62
6	19104.7	41.54 AV	54	-12.46	-66.19	-63.53	7.93	-53.72
7	23671.2	50.95 PK	74	-23.05	-55.92	-54.66	7.93	-44.31
8	23671.2	42.25 AV	54	-11.75	-65.07	-63.06	7.93	-53.01
9	38620.27	50.35 PK	74	-23.65	-56.44	-55.33	7.93	-44.91
10	38620.27	37.52 AV	54	-16.48	-67.54	-70.24	7.93	-57.74

Note: Margin value = Emission Level - Limit value

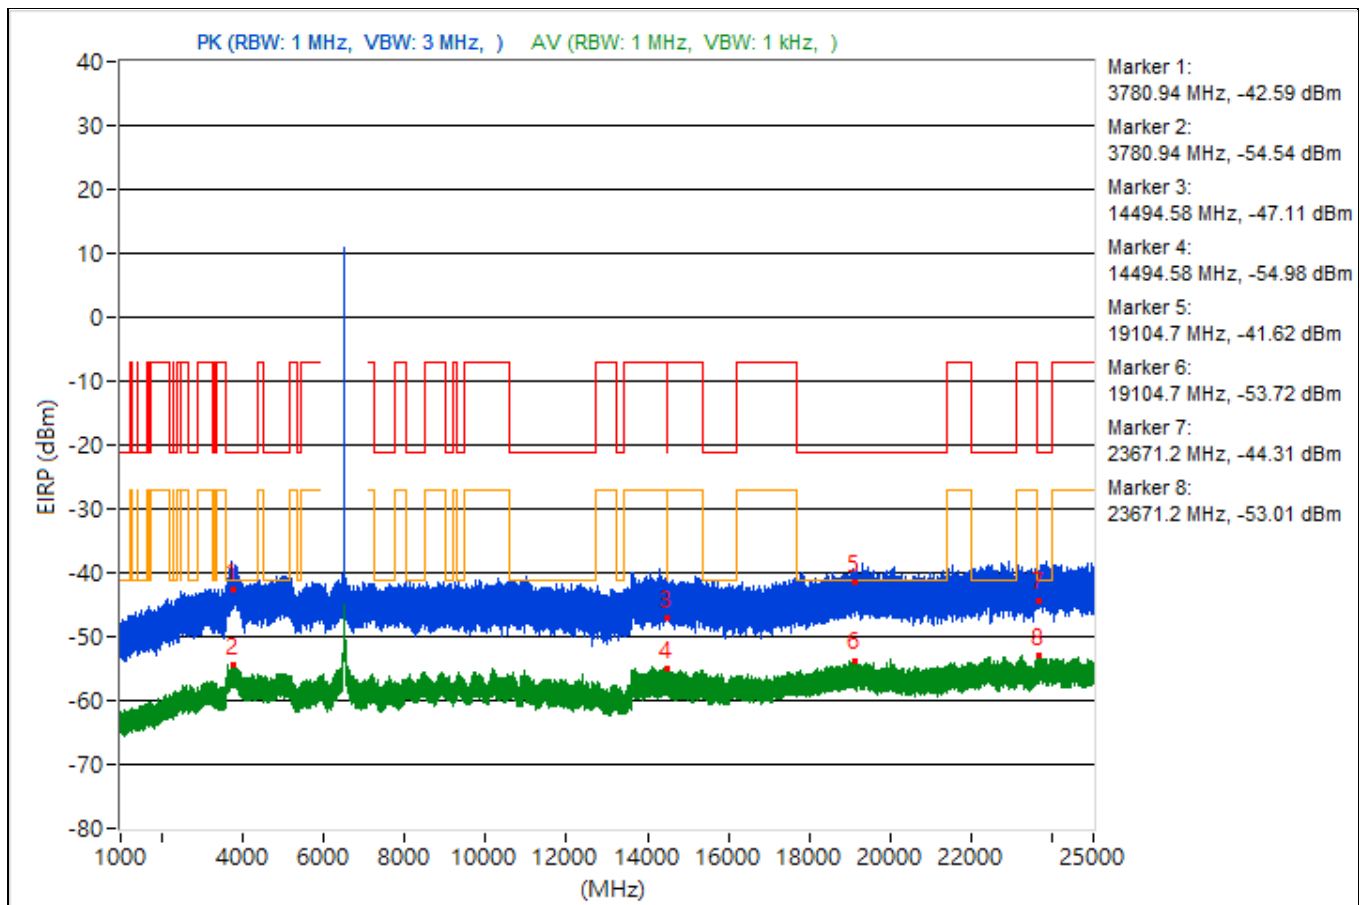


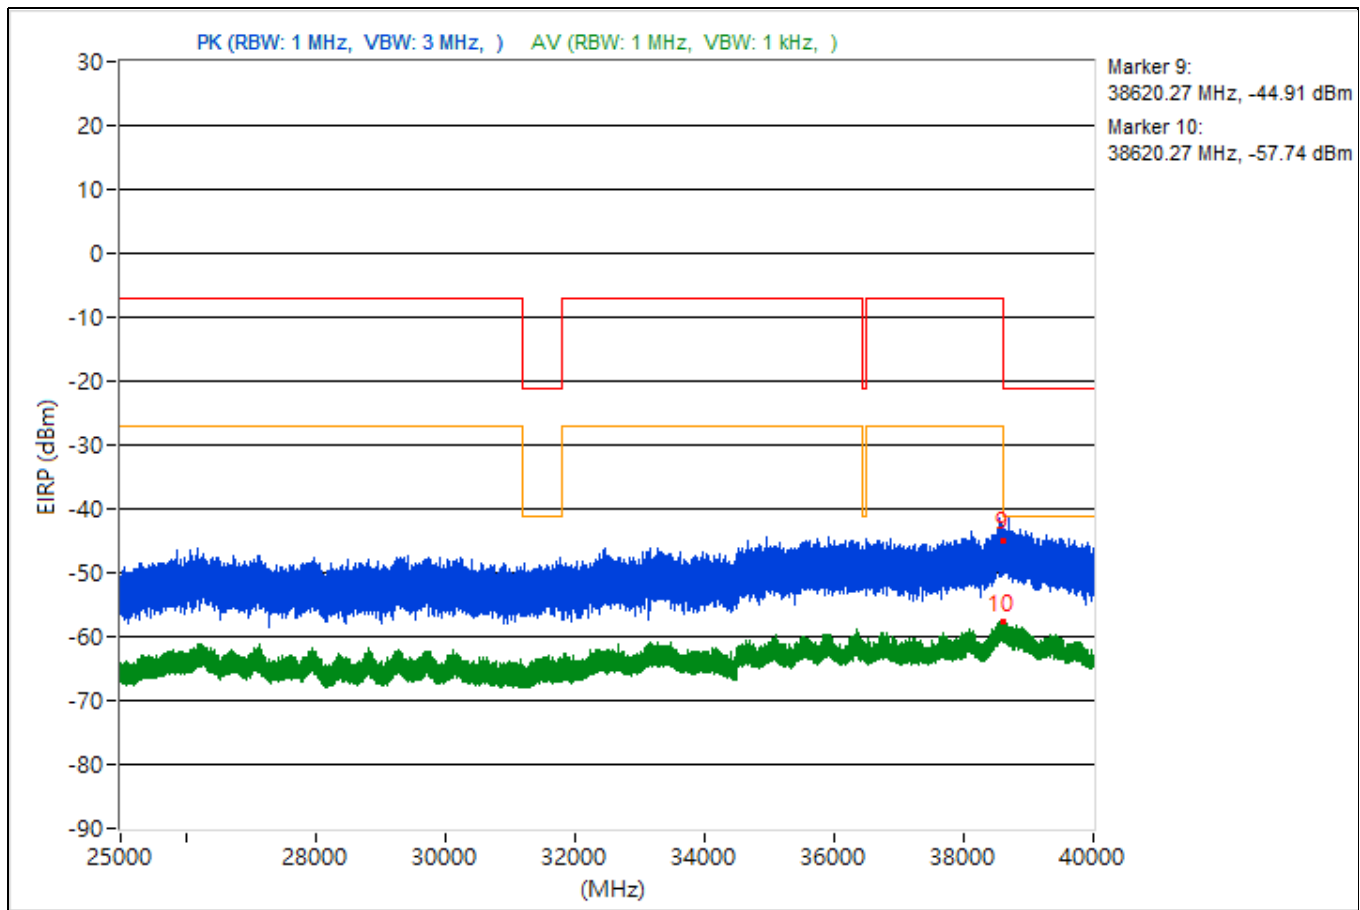


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3834.61	51.6 PK	74	-22.4	-55.82	-53.65	7.93	-43.66
2	3834.61	40.88 AV	54	-13.12	-67.15	-64.03	7.93	-54.38
3	10695.02	51.57 PK	74	-22.43	-54.48	-54.78	7.93	-43.69
4	10695.02	40 AV	54	-14	-68.27	-64.8	7.93	-55.26
5	19087.8	53.4 PK	74	-20.6	-51.31	-55.08	7.93	-41.86
6	19087.8	41.06 AV	54	-12.94	-67.61	-63.57	7.93	-54.2
7	22384.1	49.63 PK	74	-24.37	-56.31	-56.84	7.93	-45.63
8	22384.1	41.85 AV	54	-12.15	-63.12	-66.07	7.93	-53.41
9	38678.58	47.34 PK	74	-26.66	-59.22	-58.53	7.93	-47.92
10	38678.58	37.52 AV	54	-16.48	-67.02	-71.39	7.93	-57.74

Note: Margin value = Emission Level - Limit value

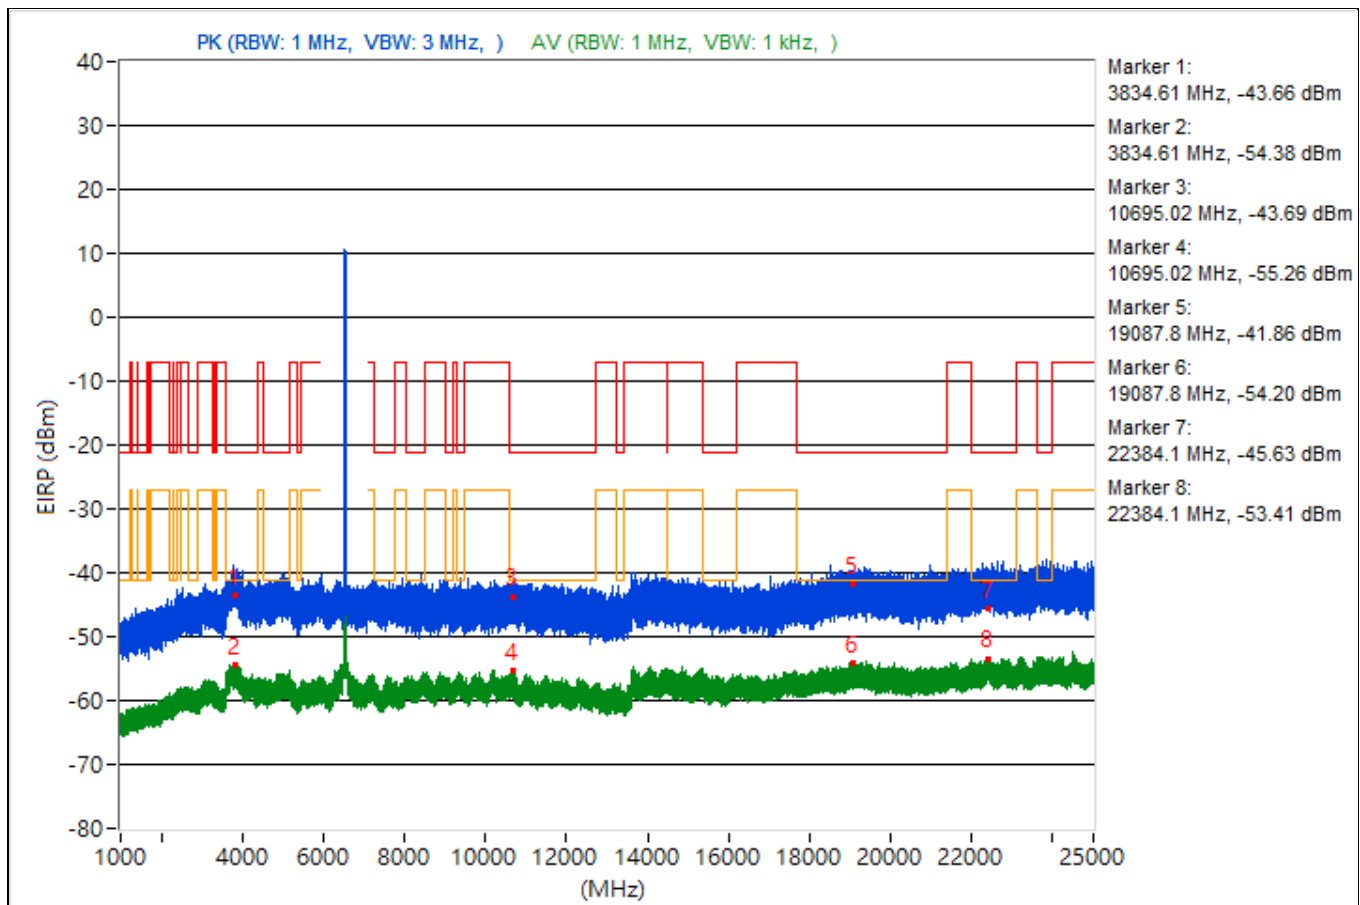


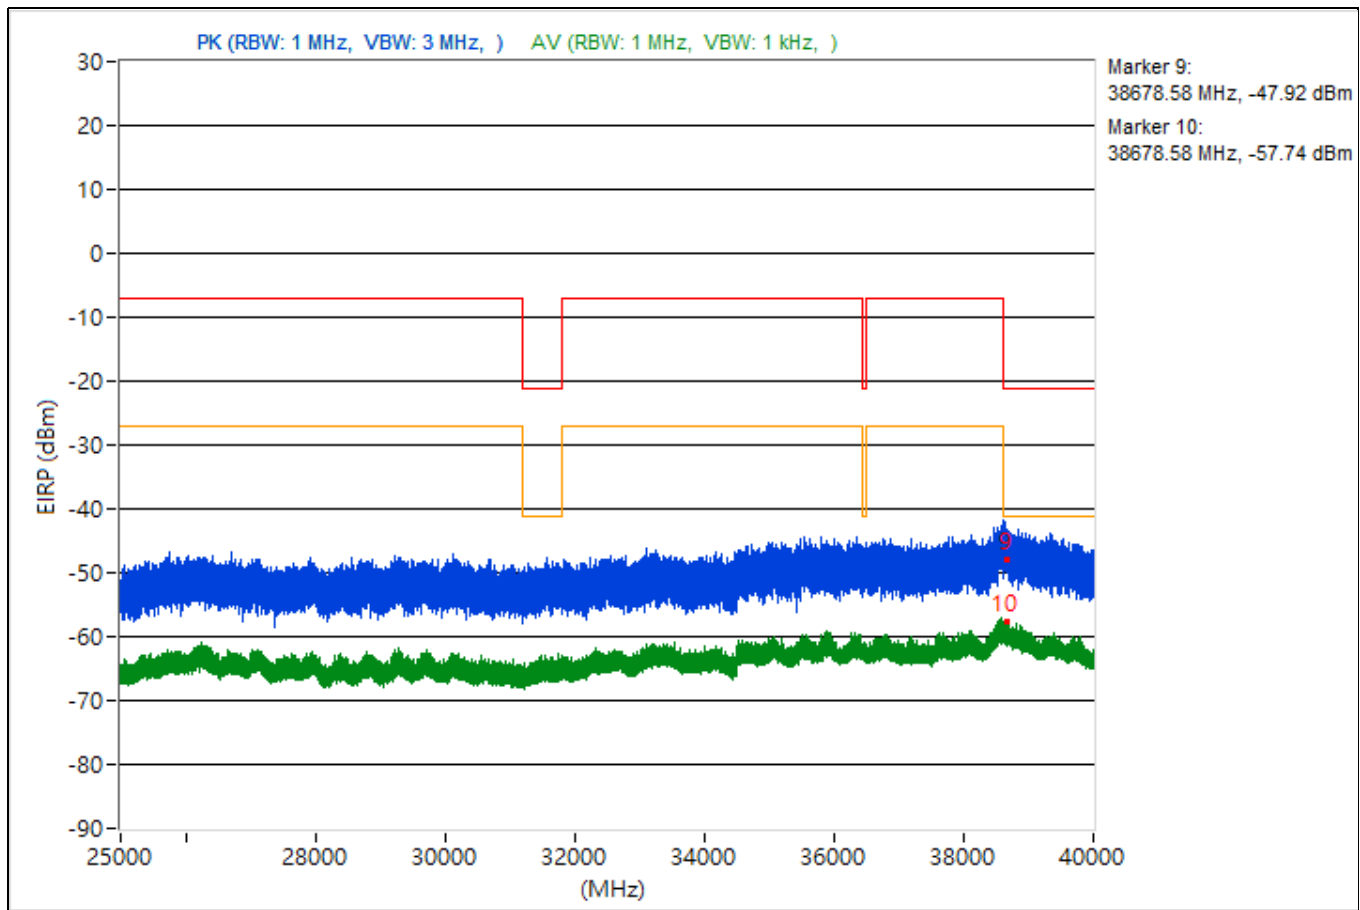


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3847.91	54.46 PK	74	-19.54	-50.64	-53.21	7.93	-40.8
2	3847.91	40.7 AV	54	-13.3	-64.29	-67.2	7.93	-54.56
3	14479.91	49.69 PK	74	-24.31	-56.97	-56.1	7.93	-45.57
4	14479.91	39.81 AV	54	-14.19	-68	-65.21	7.93	-55.45
5	19175.6	50.85 PK	74	-23.15	-56.13	-54.69	7.93	-44.41
6	19175.6	41.33 AV	54	-12.67	-66.22	-63.84	7.93	-53.93
7	23768	52.57 PK	74	-21.43	-55.14	-52.52	7.93	-42.69
8	23768	41.89 AV	54	-12.11	-66.91	-62.69	7.93	-53.37
9	38603.38	48.26 PK	74	-25.74	-57.47	-58.47	7.93	-47
10	38603.38	37.61 AV	54	-16.39	-70.83	-67.12	7.93	-57.65

Note: Margin value = Emission Level - Limit value

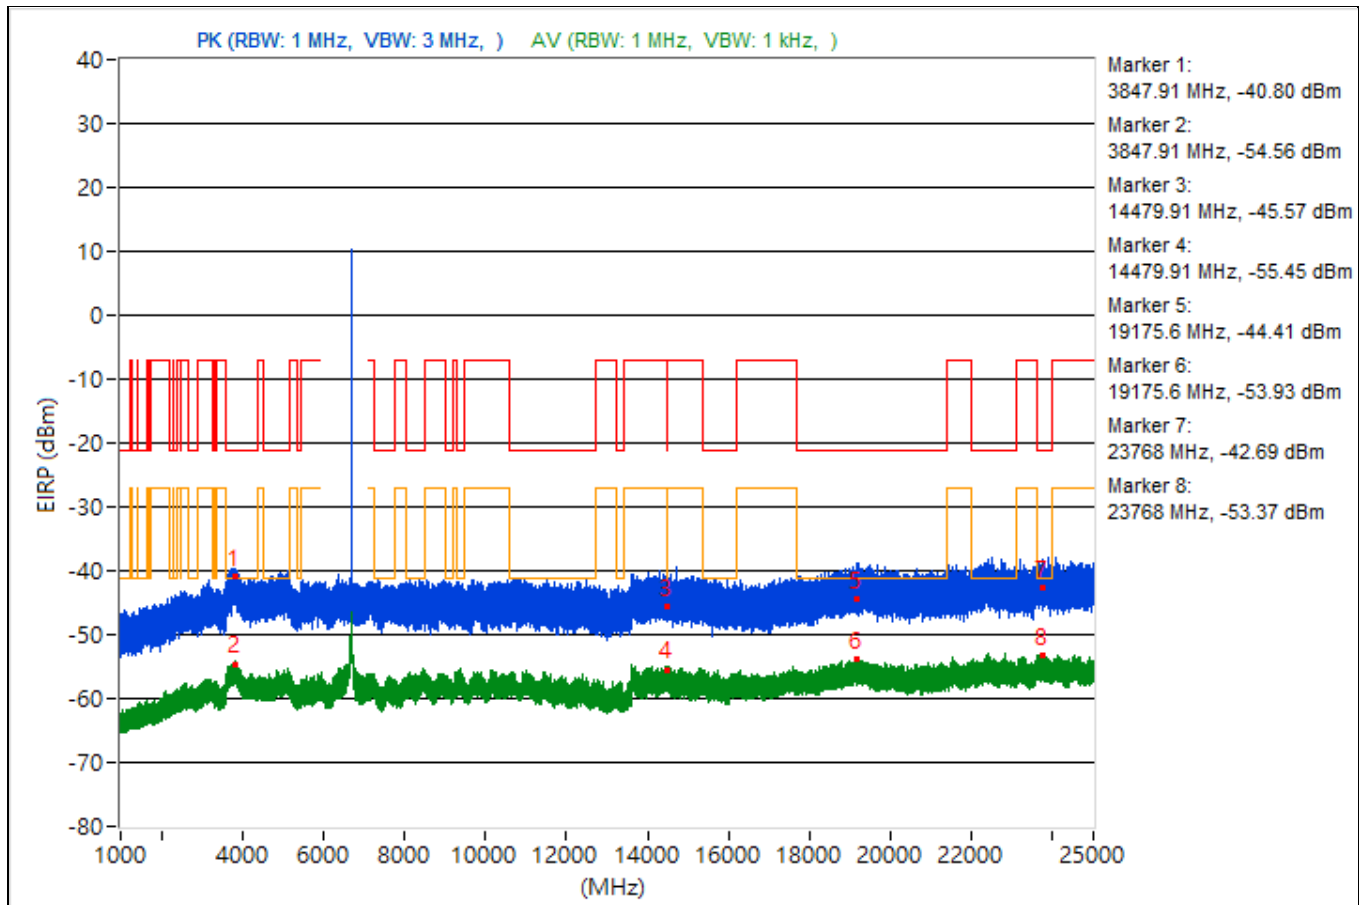


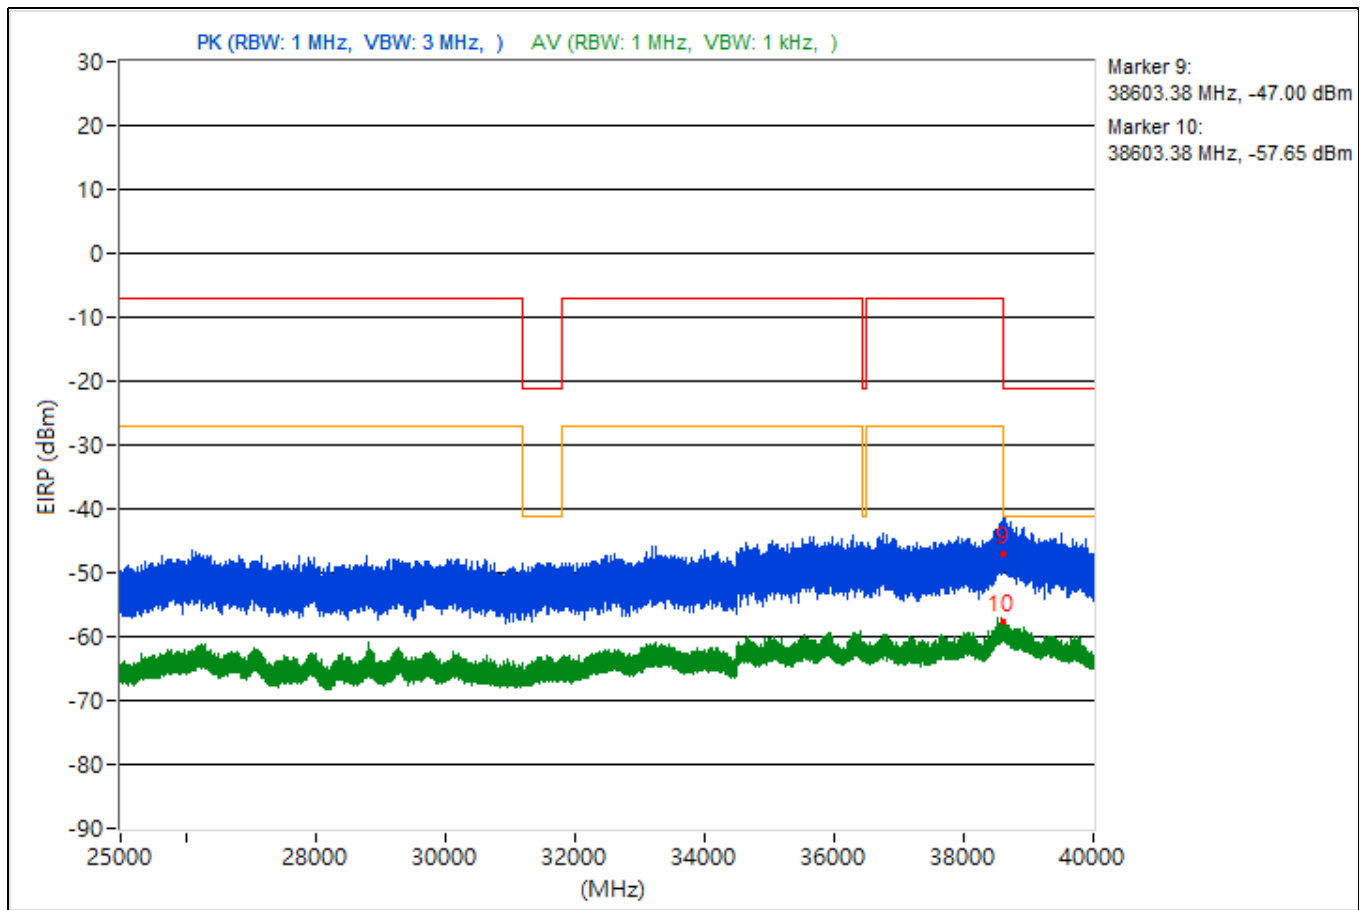


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.84	52.82 PK	74	-21.18	-53.21	-53.56	7.93	-42.44
2	3806.84	41.14 AV	54	-12.86	-64.29	-66.01	7.93	-54.12
3	14492.71	51.73 PK	74	-22.27	-58.58	-52.39	7.93	-43.53
4	14492.71	40.07 AV	54	-13.93	-64.99	-67.69	7.93	-55.19
5	18966.7	53.17 PK	74	-20.83	-52.42	-53.75	7.93	-42.09
6	18966.7	41.1 AV	54	-12.9	-64.02	-66.53	7.93	-54.16
7	22420.1	53.47 PK	74	-20.53	-51.92	-53.72	7.93	-41.79
8	22420.1	41.87 AV	54	-12.13	-63.04	-66.19	7.93	-53.39
9	38644.18	48.63 PK	74	-25.37	-58.66	-56.71	7.93	-46.63
10	38644.18	38.05 AV	54	-15.95	-70.67	-66.57	7.93	-57.21

Note: Margin value = Emission Level - Limit value

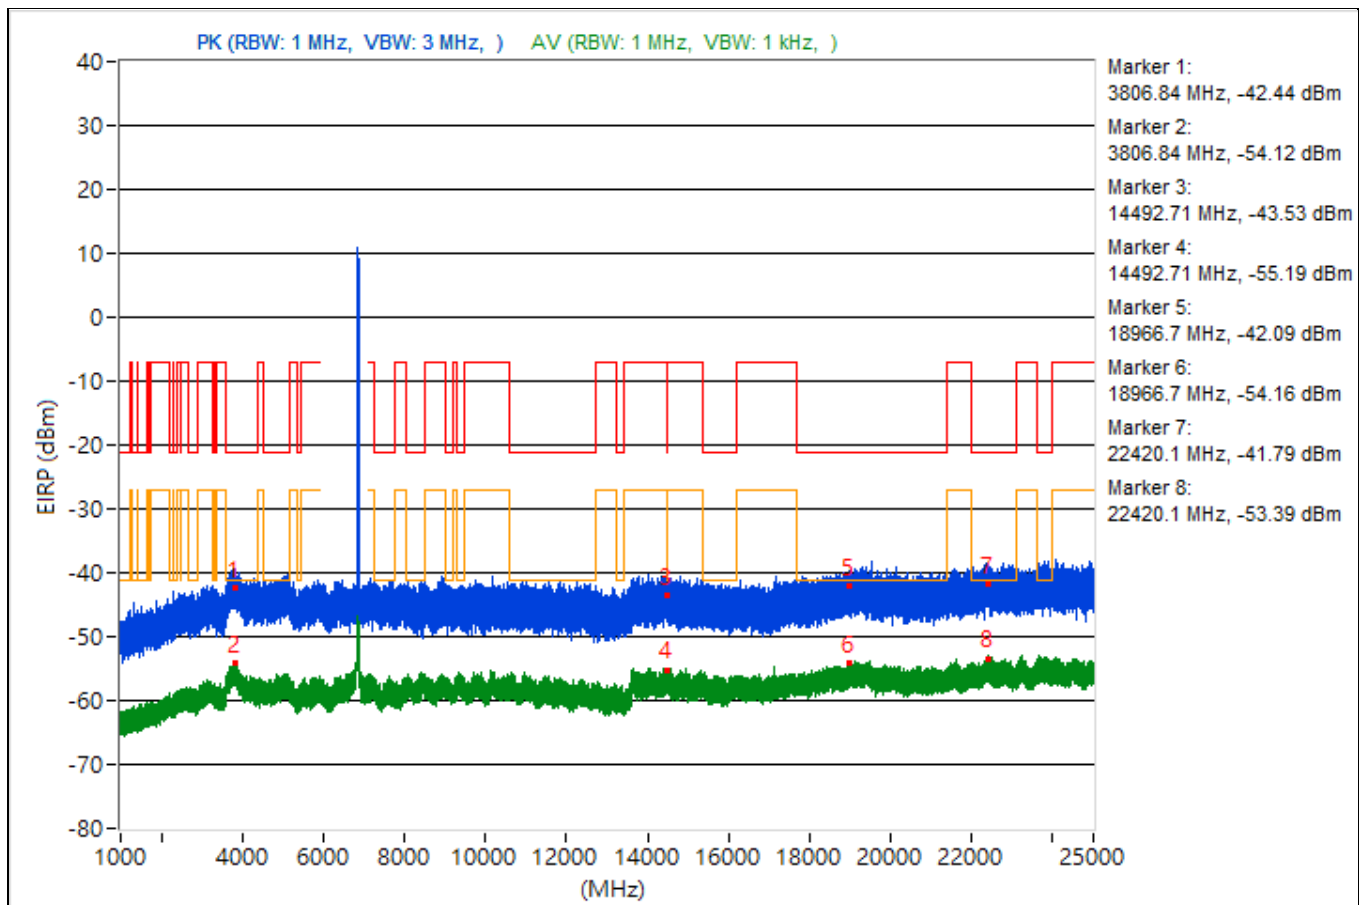


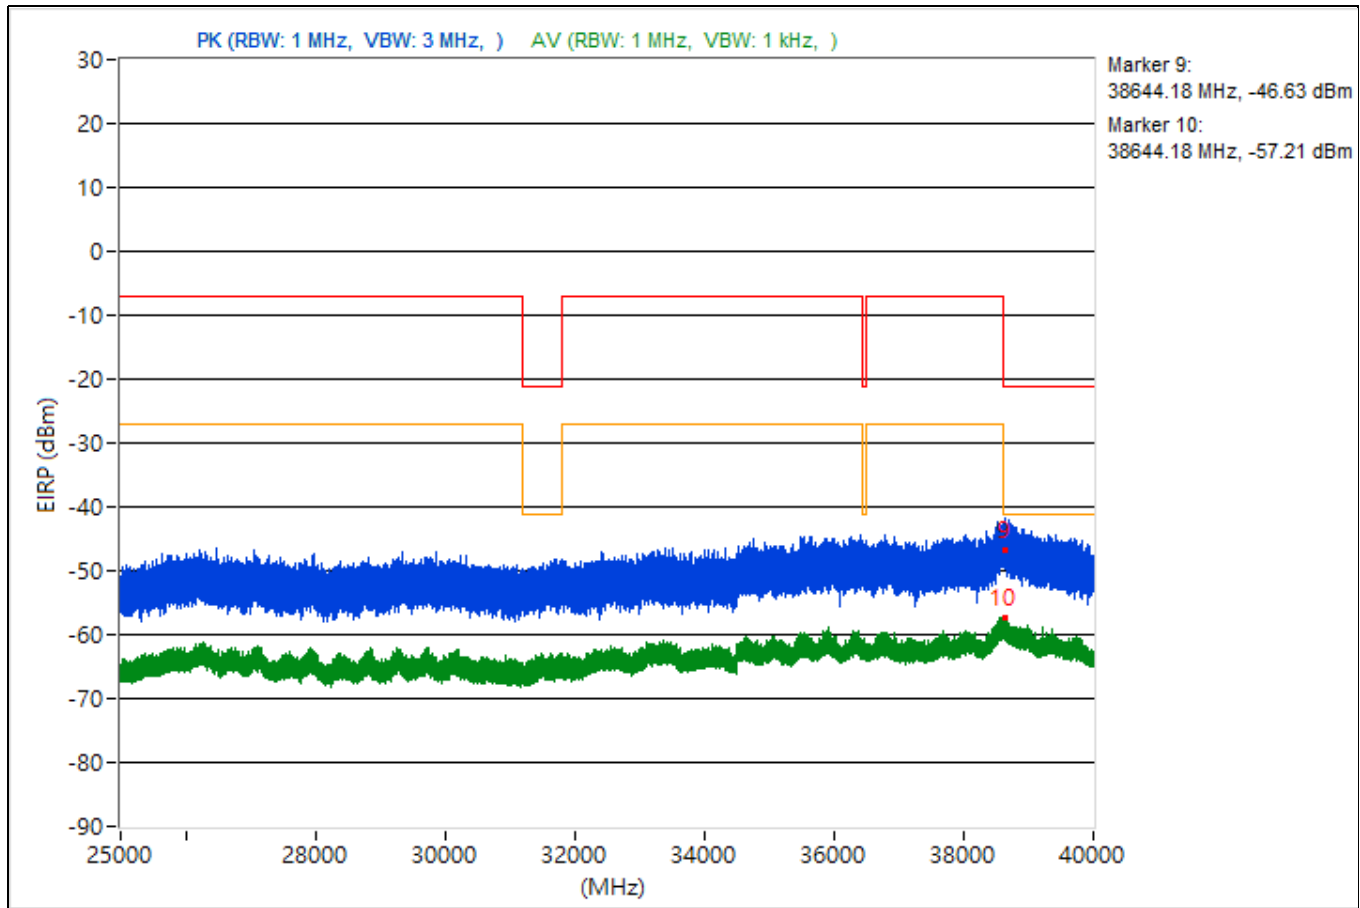


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3752.63	53.03 PK	74	-20.97	-54.34	-52.25	7.93	-42.23
2	3752.63	40.8 AV	54	-13.2	-64.7	-66.24	7.93	-54.46
3	14481.24	50.52 PK	74	-23.48	-54.64	-57.05	7.93	-44.74
4	14481.24	40.15 AV	54	-13.85	-65.03	-67.39	7.93	-55.11
5	19179.2	52.42 PK	74	-21.58	-54.66	-53.05	7.93	-42.84
6	19179.2	41.78 AV	54	-12.22	-65.31	-63.68	7.93	-53.48
7	22440.4	52.91 PK	74	-21.09	-53.39	-53.19	7.93	-42.35
8	22440.4	41.66 AV	54	-12.34	-63.42	-66.04	7.93	-53.6
9	38612.09	50.09 PK	74	-23.91	-58.75	-54.48	7.93	-45.17
10	38612.09	38.33 AV	54	-15.67	-69.61	-66.63	7.93	-56.93

Note: Margin value = Emission Level - Limit value

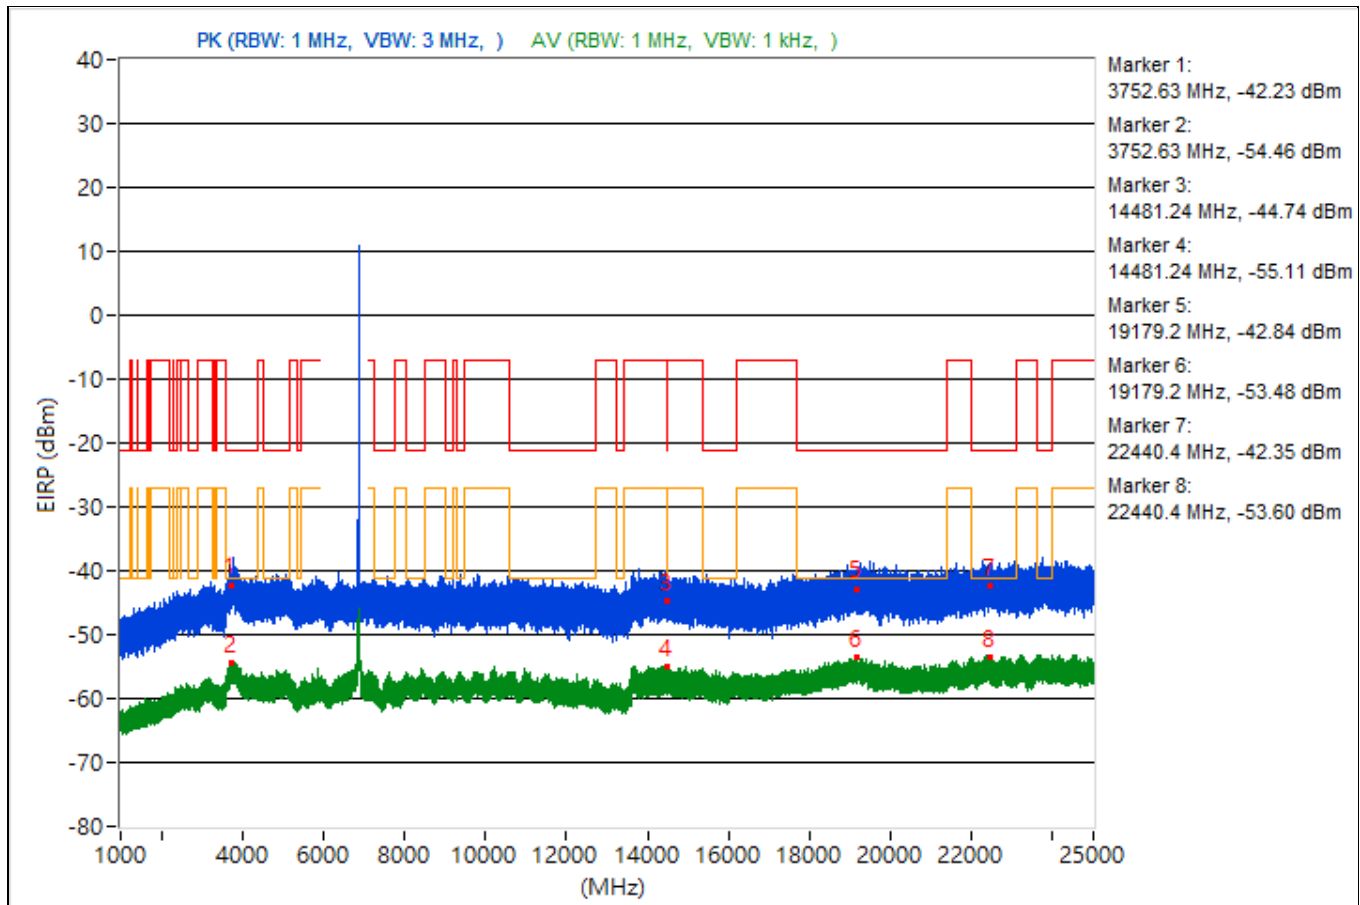


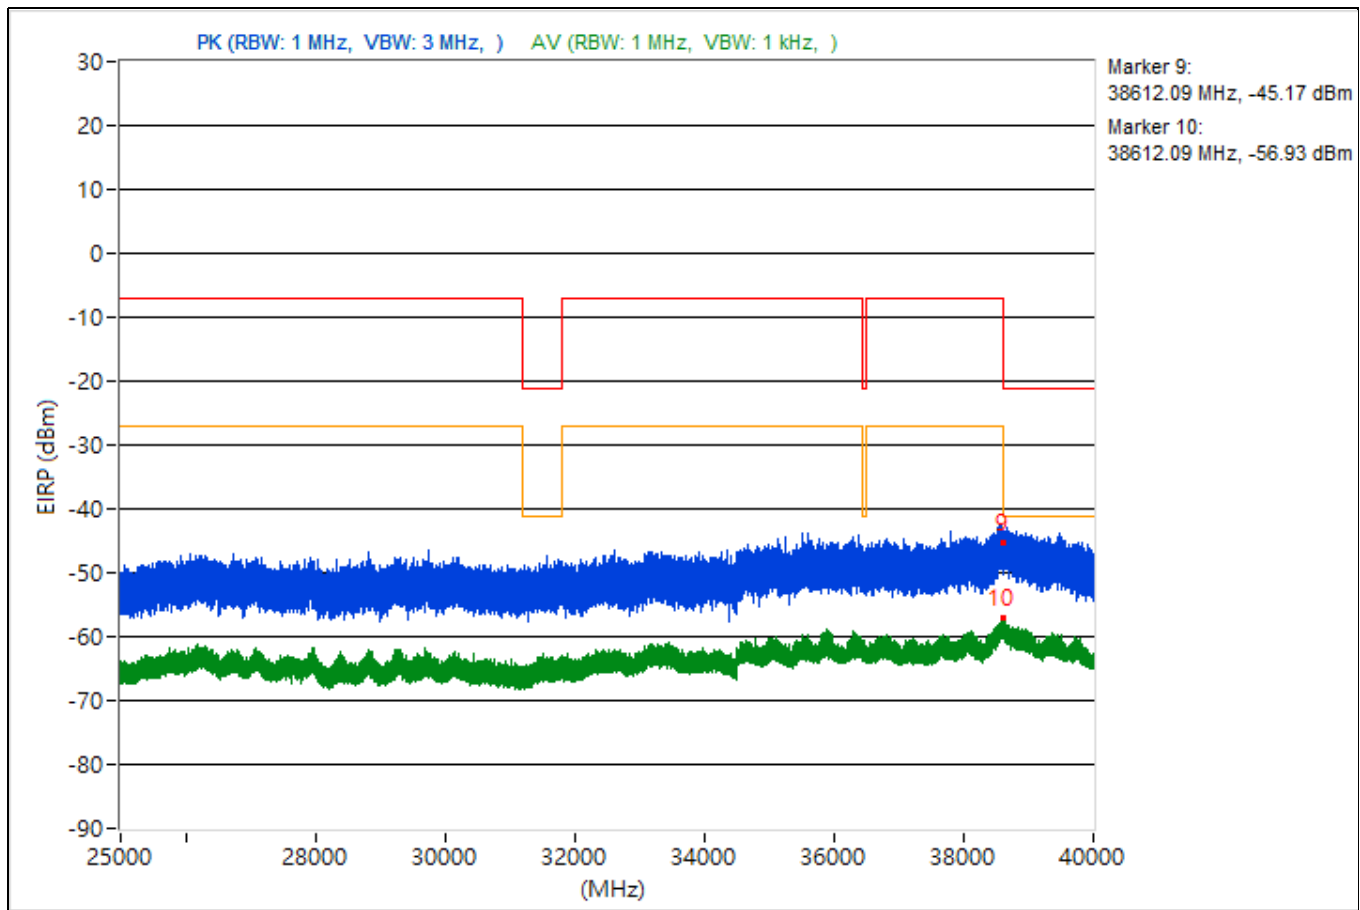


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3824.03	54.34 PK	74	-19.66	-51.67	-52.05	7.93	-40.92
2	3824.03	40.57 AV	54	-13.43	-64.37	-67.44	7.93	-54.69
3	9366.67	49.11 PK	74	-24.89	-57.41	-56.79	7.93	-46.15
4	9366.67	39.87 AV	54	-14.13	-64.99	-68.27	7.93	-55.39
5	18841.8	53.11 PK	74	-20.89	-53.13	-53.05	7.93	-42.15
6	18841.8	41.39 AV	54	-12.61	-66.95	-63.38	7.93	-53.87
7	23704.3	54.29 PK	74	-19.71	-50.71	-53.58	7.93	-40.97
8	23704.3	41.77 AV	54	-12.23	-62.97	-66.64	7.93	-53.49
9	38661.07	50.18 PK	74	-23.82	-55.77	-56.28	7.93	-45.08
10	38661.07	38.17 AV	54	-15.83	-69.4	-66.99	7.93	-57.09

Note: Margin value = Emission Level - Limit value

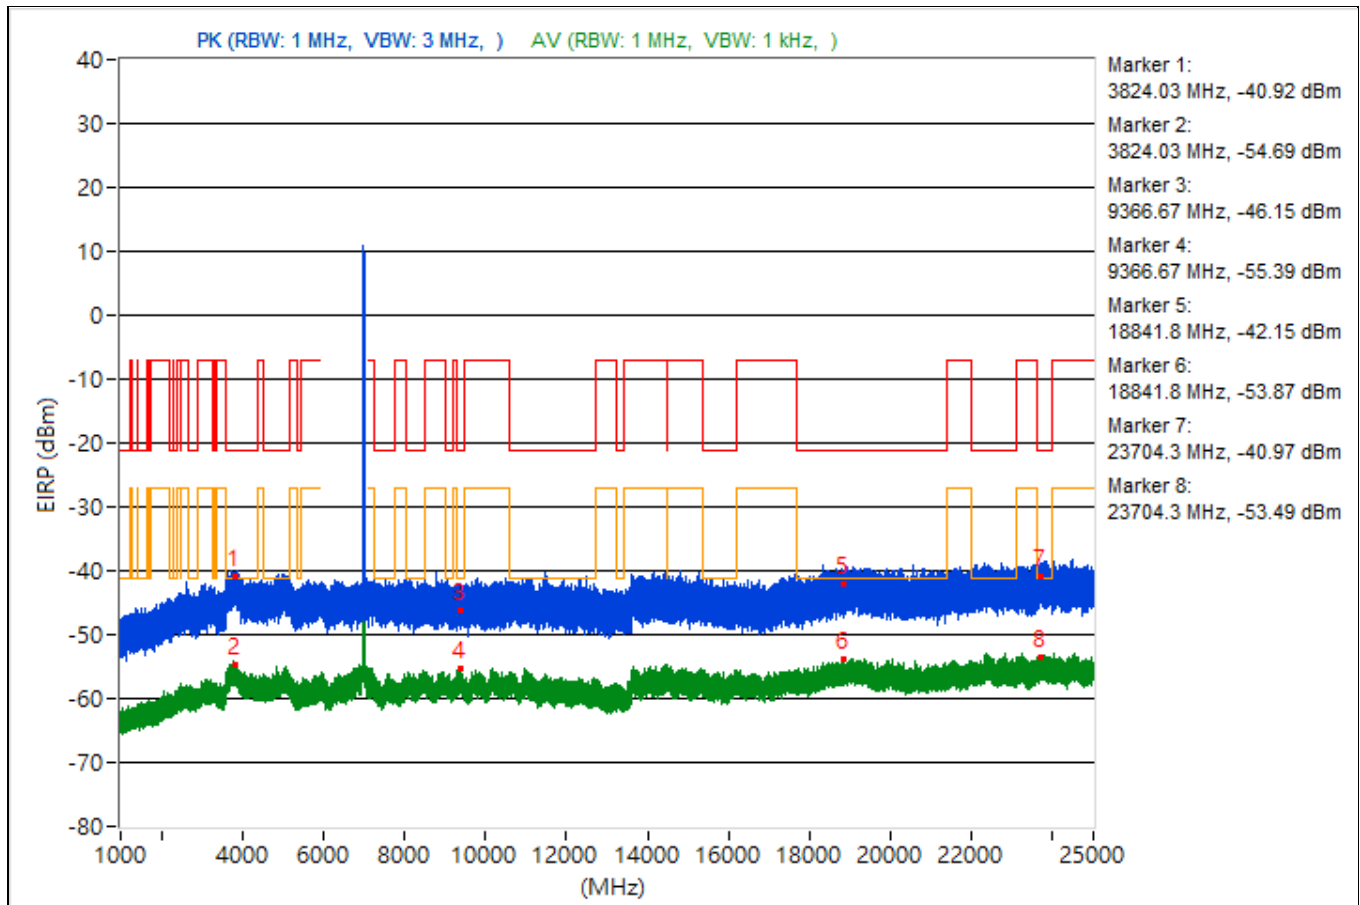


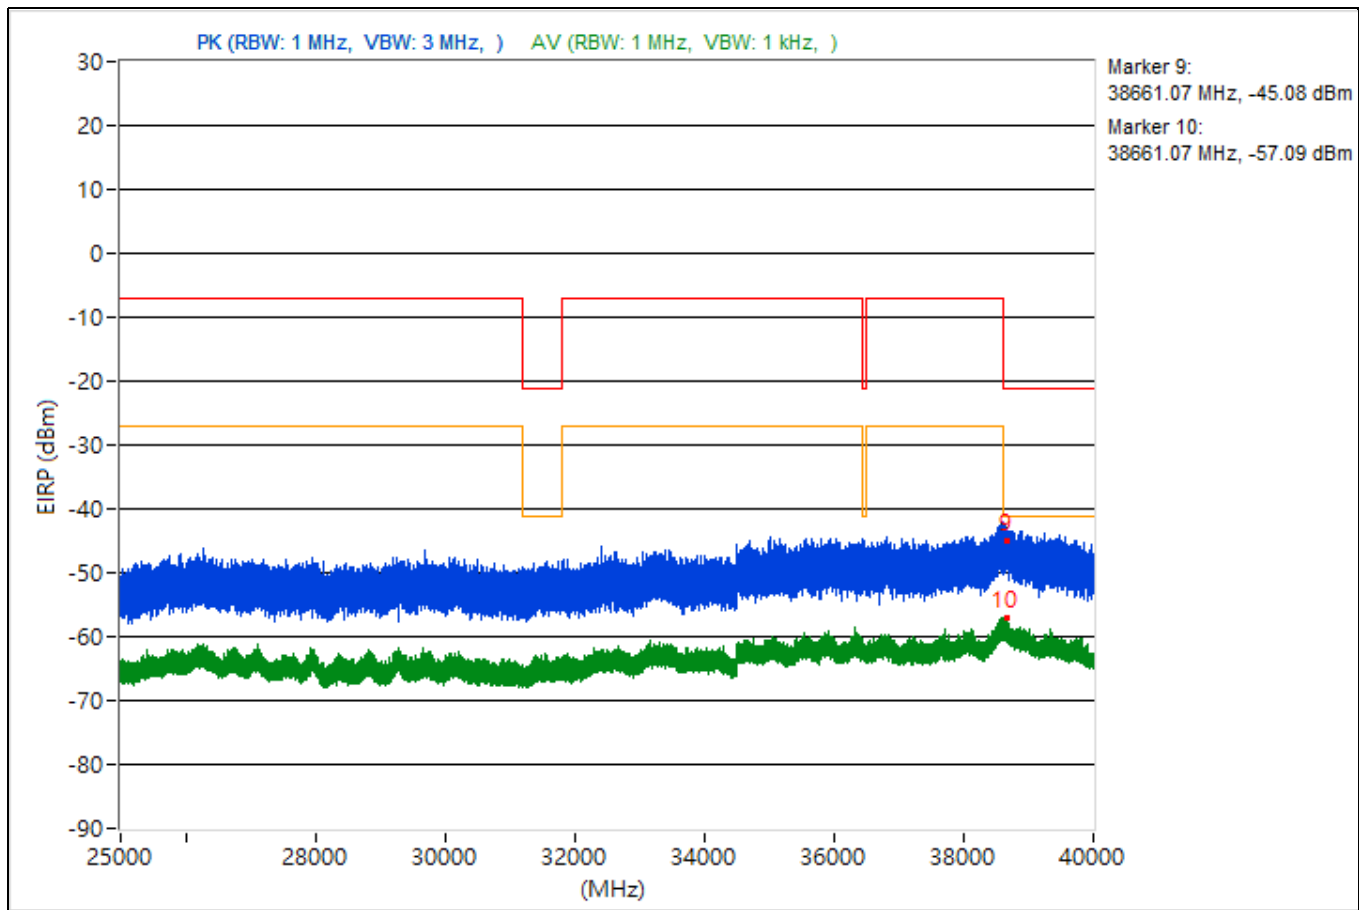


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.79	53.64 PK	74	-20.36	-52.98	-52.18	7.93	-41.62
2	3787.79	41.5 AV	54	-12.5	-65.49	-64.03	7.93	-53.76
3	15355.38	49.17 PK	74	-24.83	-56.87	-57.2	7.93	-46.09
4	15355.38	39.38 AV	54	-14.62	-65.31	-69.15	7.93	-55.88
5	19136.4	52.09 PK	74	-21.91	-52.54	-56.59	7.93	-43.17
6	19136.4	41.27 AV	54	-12.73	-66.29	-63.9	7.93	-53.99
7	23786.3	52.09 PK	74	-21.91	-55.7	-52.96	7.93	-43.17
8	23786.3	41.92 AV	54	-12.08	-66.39	-62.87	7.93	-53.34
9	38607.64	47.99 PK	74	-26.01	-58.26	-58.15	7.93	-47.27
10	38607.64	38.31 AV	54	-15.69	-66.76	-69.43	7.93	-56.95

Note: Margin value = Emission Level - Limit value

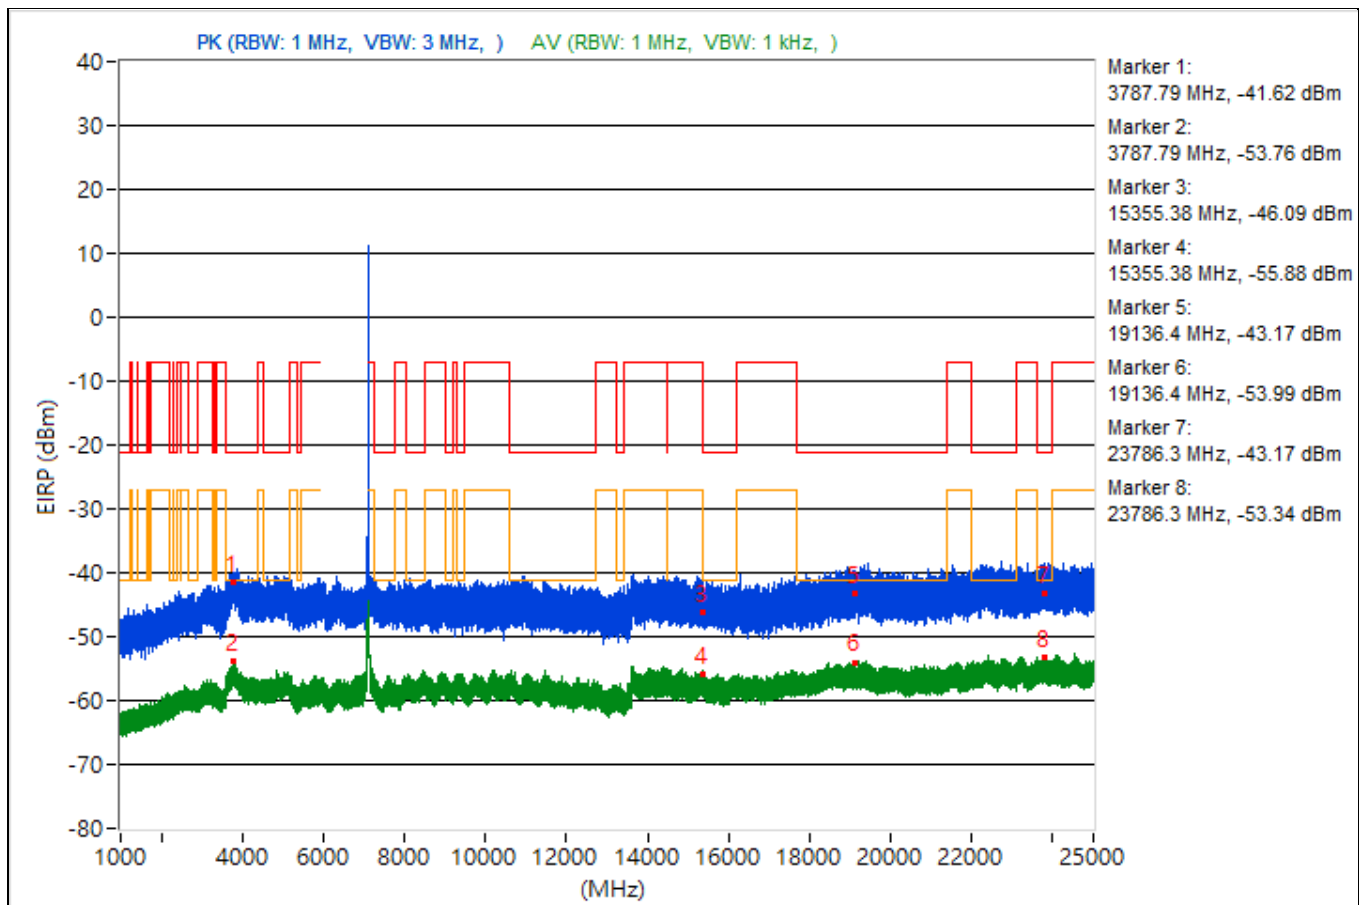


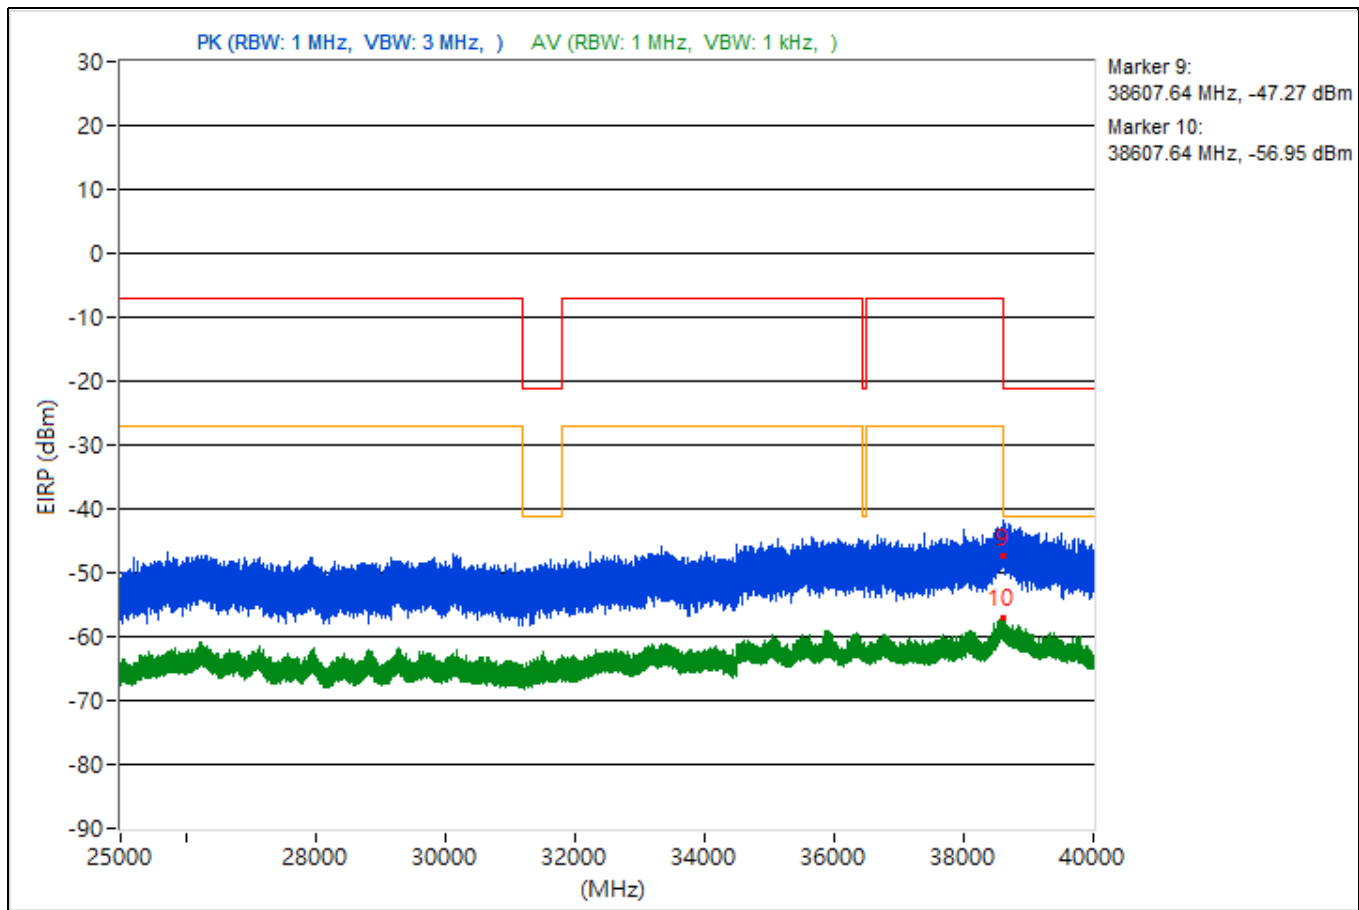


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.2	49.48 PK	74	-24.52	-53.21	-54.27	4.92	-45.78
2	3797.2	37.38 AV	54	-16.62	-64.61	-67.48	4.92	-57.88
3	15353.51	47.6 PK	74	-26.4	-56.38	-54.92	4.92	-47.66
4	15353.51	37.23 AV	54	-16.77	-68.16	-64.5	4.92	-58.03
5	19009	51.01 PK	74	-22.99	-52.25	-52.11	4.92	-44.25
6	19009	37.96 AV	54	-16.04	-63.7	-67.61	4.92	-57.3
7	22348.7	51.91 PK	74	-22.09	-50.32	-52.53	4.92	-43.35
8	22348.7	39.38 AV	54	-14.62	-63.37	-64.3	4.92	-55.88
9	38609.24	43.6 PK	74	-30.4	-59.24	-59.96	4.92	-51.66
10	38609.24	34.31 AV	54	-19.69	-67.68	-70.54	4.92	-60.95

Note: Margin value = Emission Level - Limit value

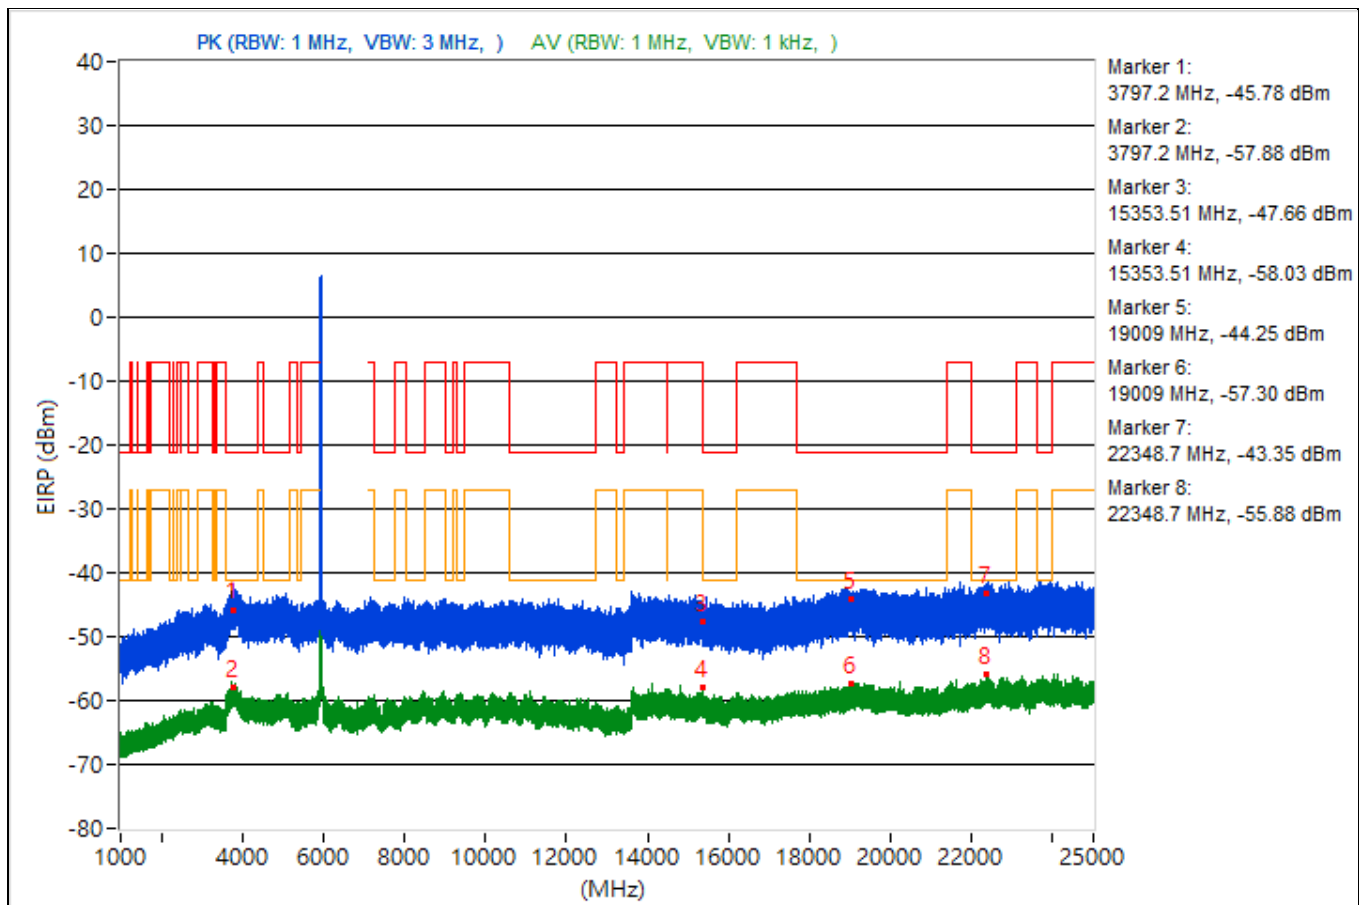


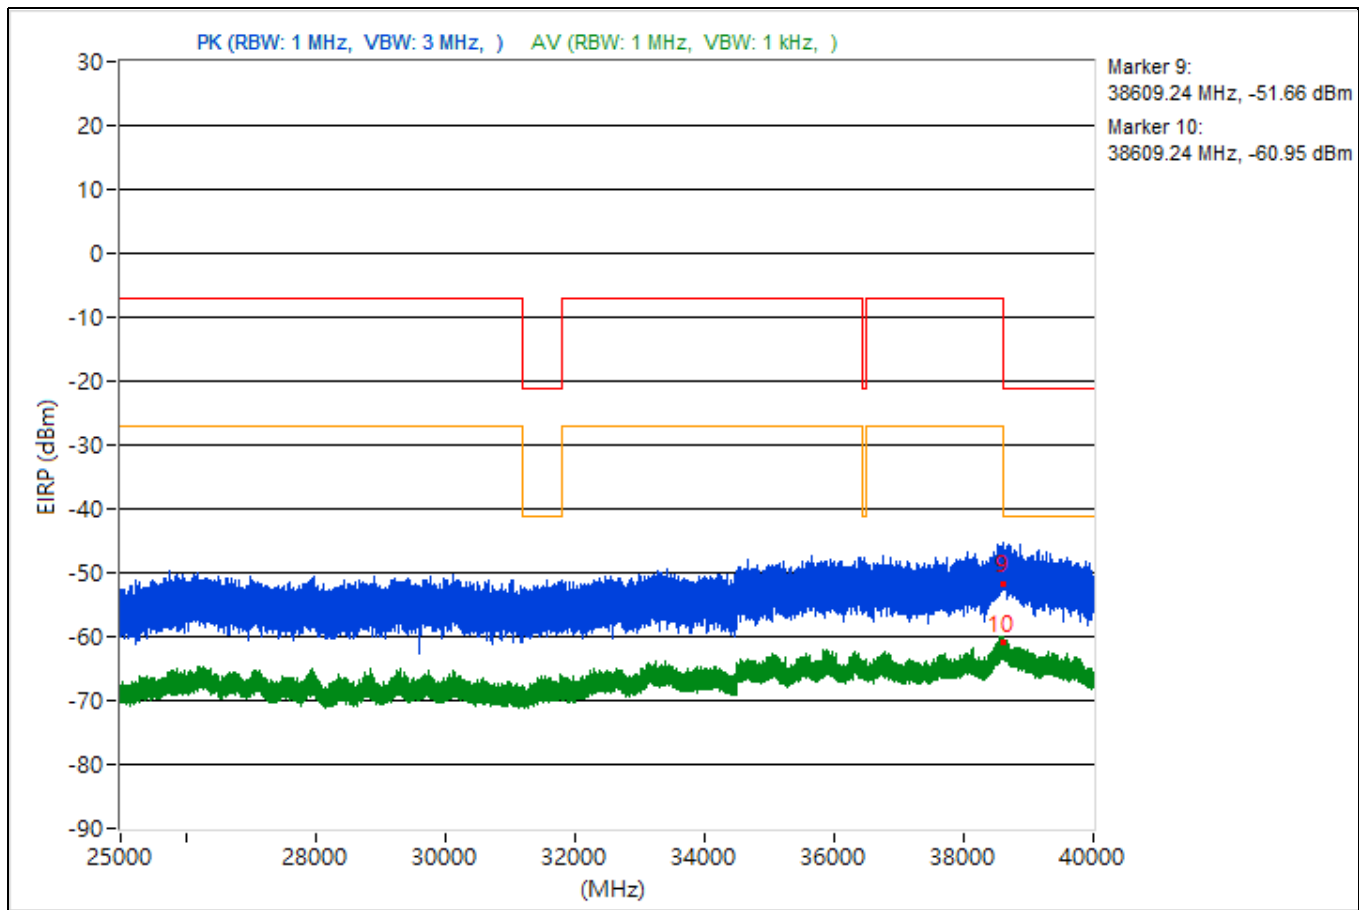


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3747.34	49.21 PK	74	-24.79	-52.59	-56.03	4.92	-46.05
2	3747.34	37.97 AV	54	-16.03	-66.3	-64.35	4.92	-57.29
3	14496	49.45 PK	74	-24.55	-54.29	-53.26	4.92	-45.81
4	14496	37.27 AV	54	-16.73	-67.88	-64.58	4.92	-57.99
5	18859.1	45.39 PK	74	-28.61	-59.32	-56.67	4.92	-49.87
6	18859.1	37.78 AV	54	-16.22	-63.68	-68.35	4.92	-57.48
7	22341.7	48.78 PK	74	-25.22	-56.6	-52.96	4.92	-46.48
8	22341.7	38.97 AV	54	-15.03	-65.52	-63.22	4.92	-56.29
9	38642.22	44.48 PK	74	-29.52	-58.58	-58.85	4.92	-50.78
10	38642.22	34.93 AV	54	-19.07	-70.46	-66.81	4.92	-60.33

Note: Margin value = Emission Level - Limit value

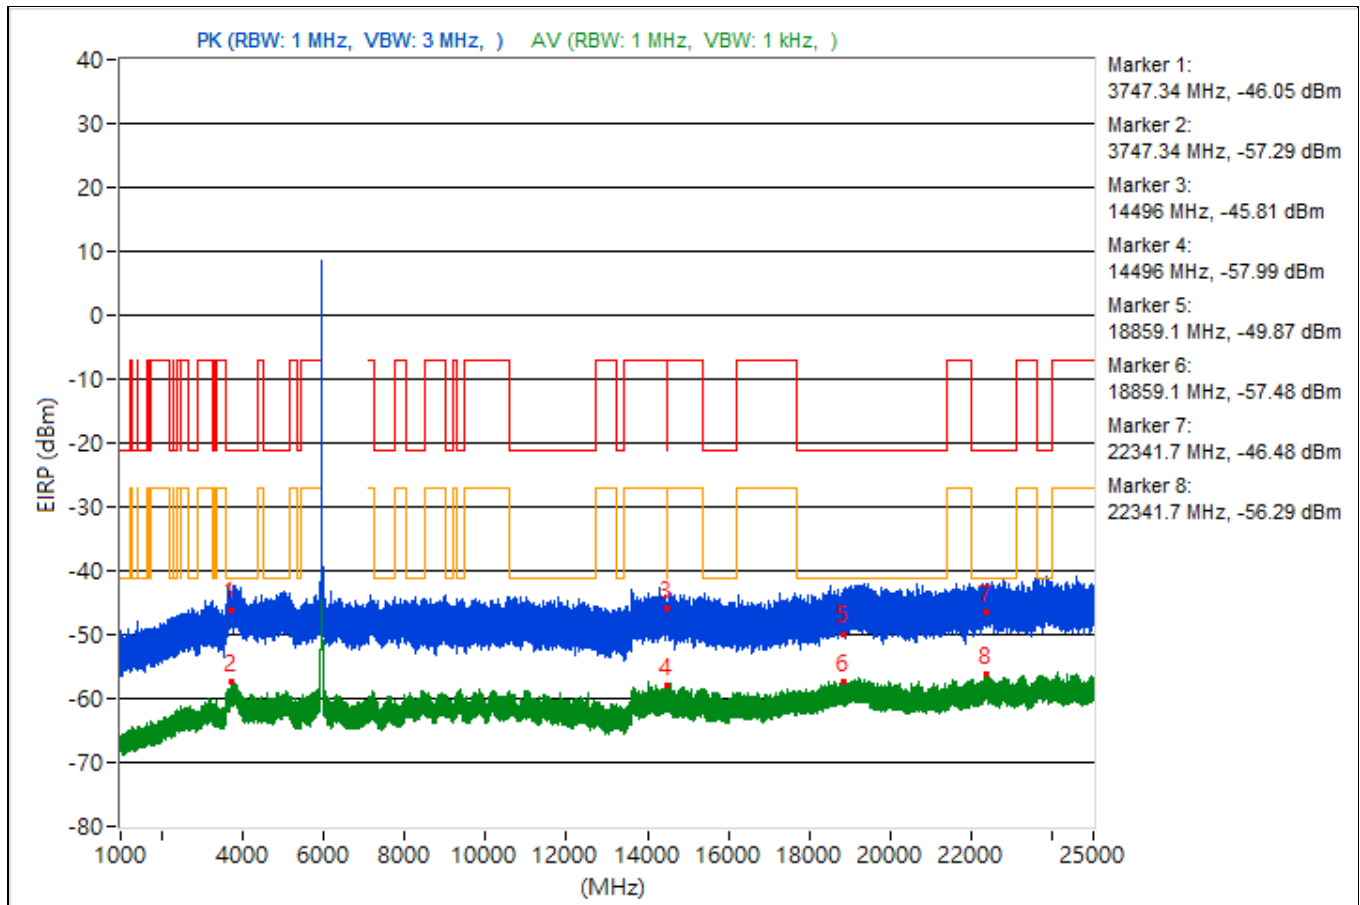


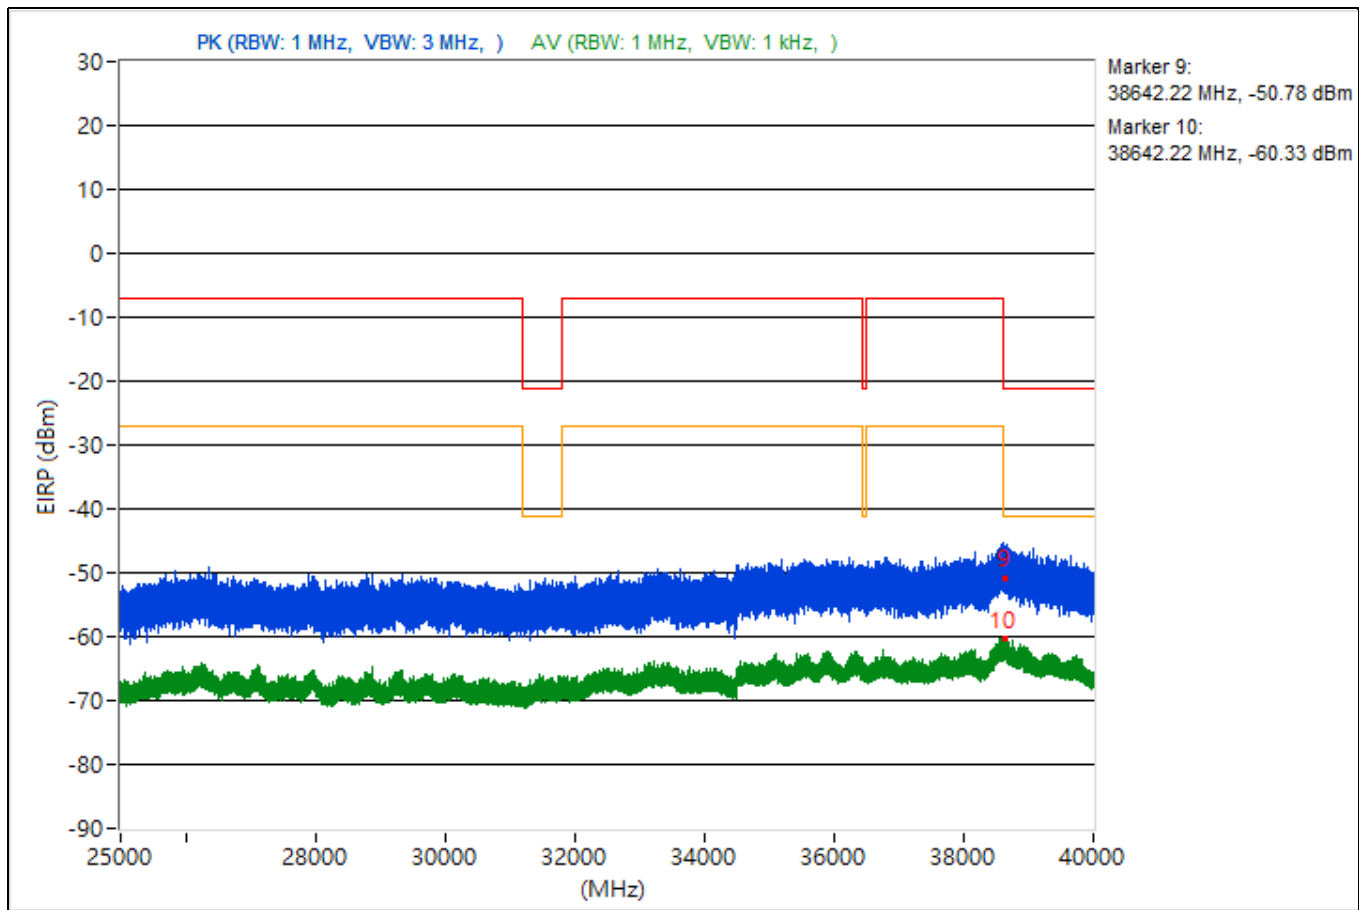


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3824.58	51.53 PK	74	-22.47	-51.42	-51.92	4.92	-43.73
2	3824.58	37.32 AV	54	-16.68	-67.67	-64.61	4.92	-57.94
3	14487.29	48.94 PK	74	-25.06	-53.78	-54.79	4.92	-46.32
4	14487.29	36.92 AV	54	-17.08	-67.27	-65.45	4.92	-58.34
5	19311.6	50.92 PK	74	-23.08	-51.55	-53.14	4.92	-44.34
6	19311.6	39.05 AV	54	-14.95	-64.47	-63.84	4.92	-56.21
7	22760	51.06 PK	74	-22.94	-50.35	-55.22	4.92	-44.2
8	22760	38.79 AV	54	-15.21	-66.78	-62.87	4.92	-56.47
9	38619.91	44.43 PK	74	-29.57	-58.42	-59.12	4.92	-50.83
10	38619.91	34.22 AV	54	-19.78	-67.86	-70.46	4.92	-61.04

Note: Margin value = Emission Level - Limit value

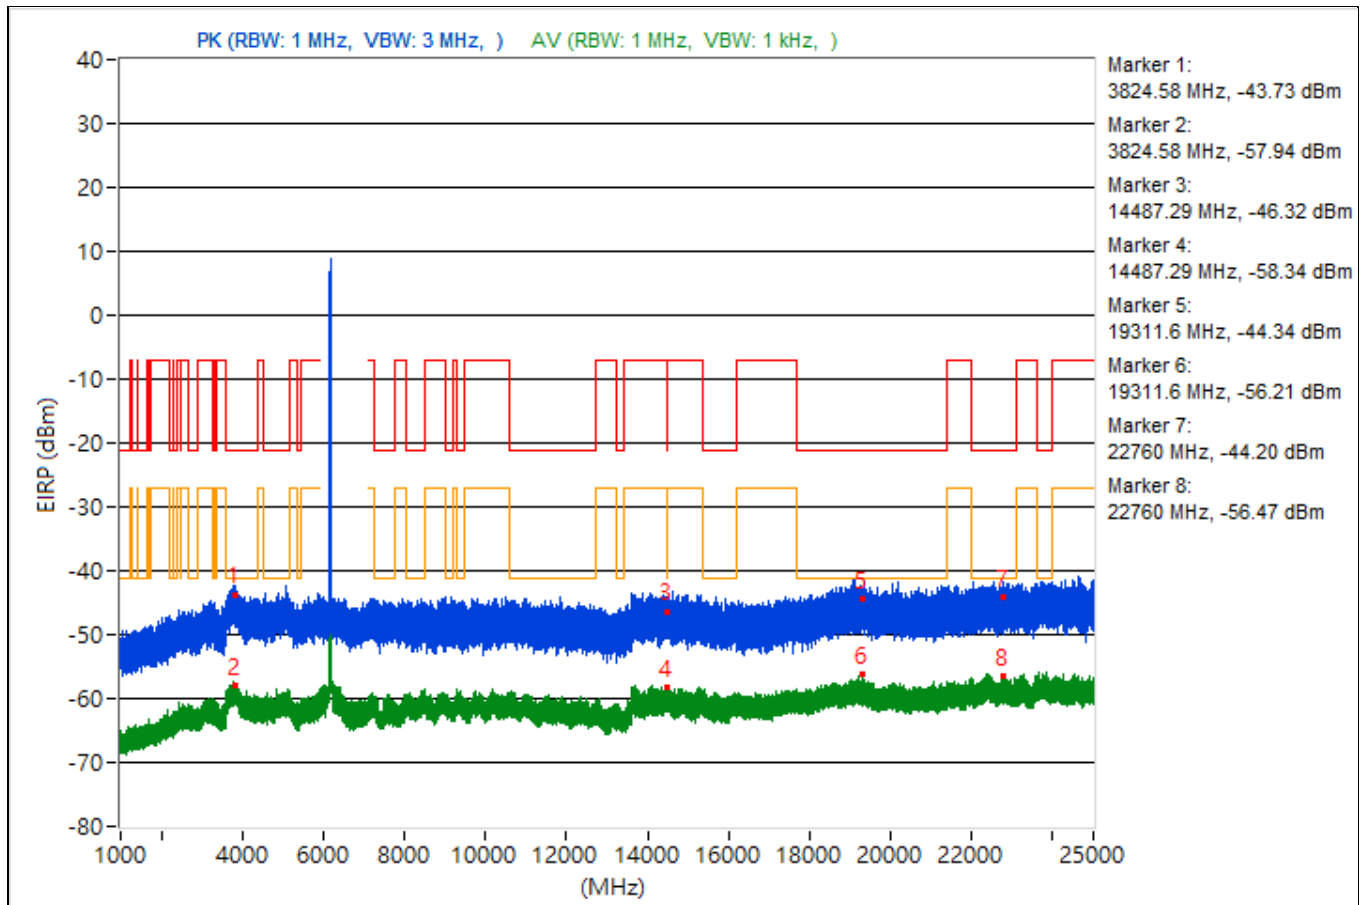


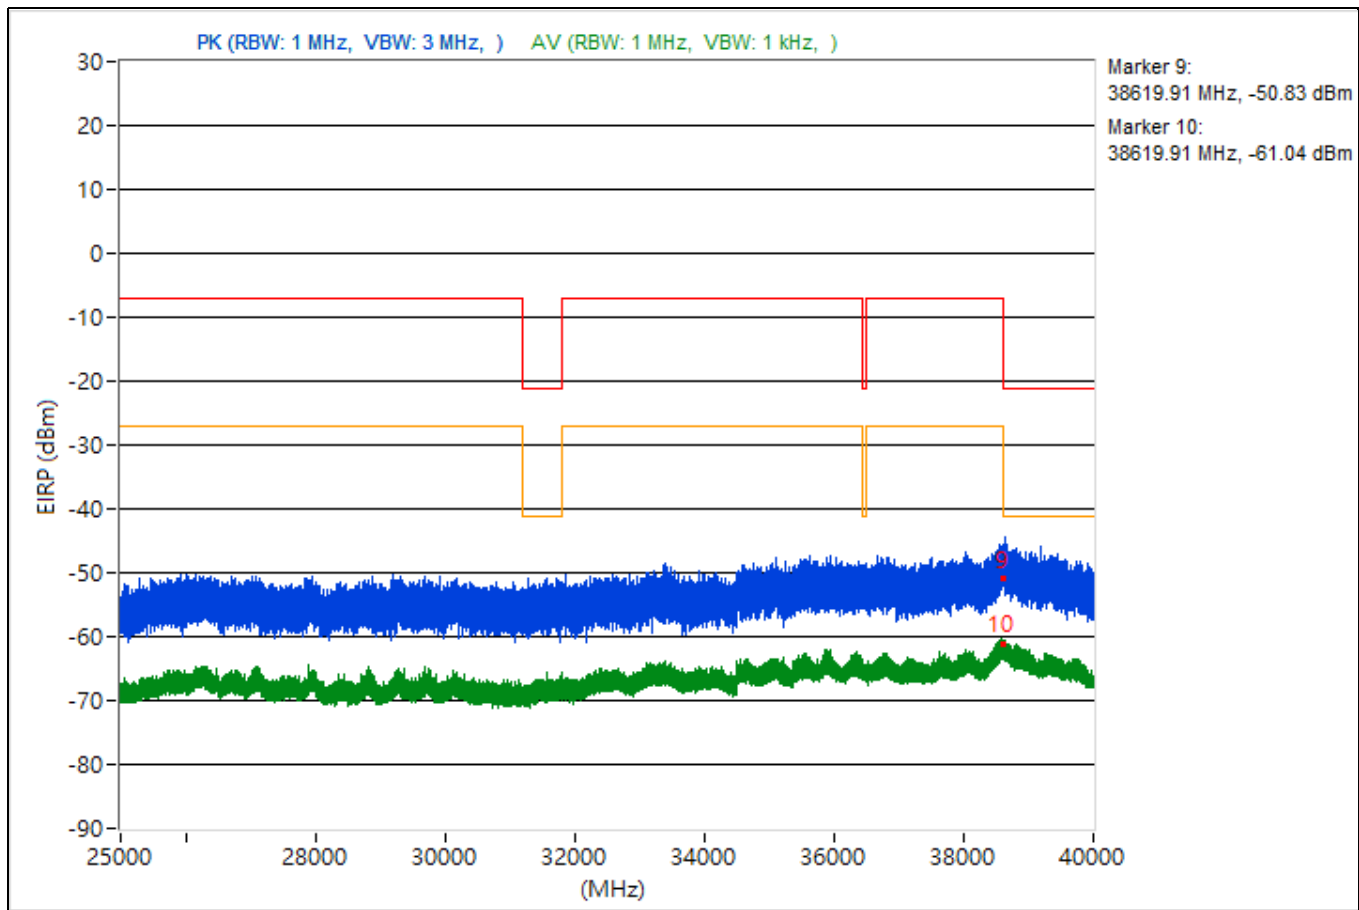


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3729.69	49.96 PK	74	-24.04	-52.48	-54.13	4.92	-45.3
2	3729.69	37.99 AV	54	-16.01	-64.23	-66.45	4.92	-57.27
3	14482.04	47.38 PK	74	-26.62	-54.81	-57.12	4.92	-47.88
4	14482.04	36.65 AV	54	-17.35	-67.97	-65.46	4.92	-58.61
5	19609.4	47.92 PK	74	-26.08	-55.86	-54.76	4.92	-47.34
6	19609.4	37.92 AV	54	-16.08	-63.72	-67.72	4.92	-57.34
7	22427.5	51.71 PK	74	-22.29	-50.7	-52.44	4.92	-43.55
8	22427.5	39.08 AV	54	-14.92	-66.2	-62.71	4.92	-56.18
9	38609.24	46.83 PK	74	-27.17	-55.87	-56.91	4.92	-48.43
10	38609.24	34.97 AV	54	-19.03	-70.7	-66.65	4.92	-60.29

Note: Margin value = Emission Level - Limit value

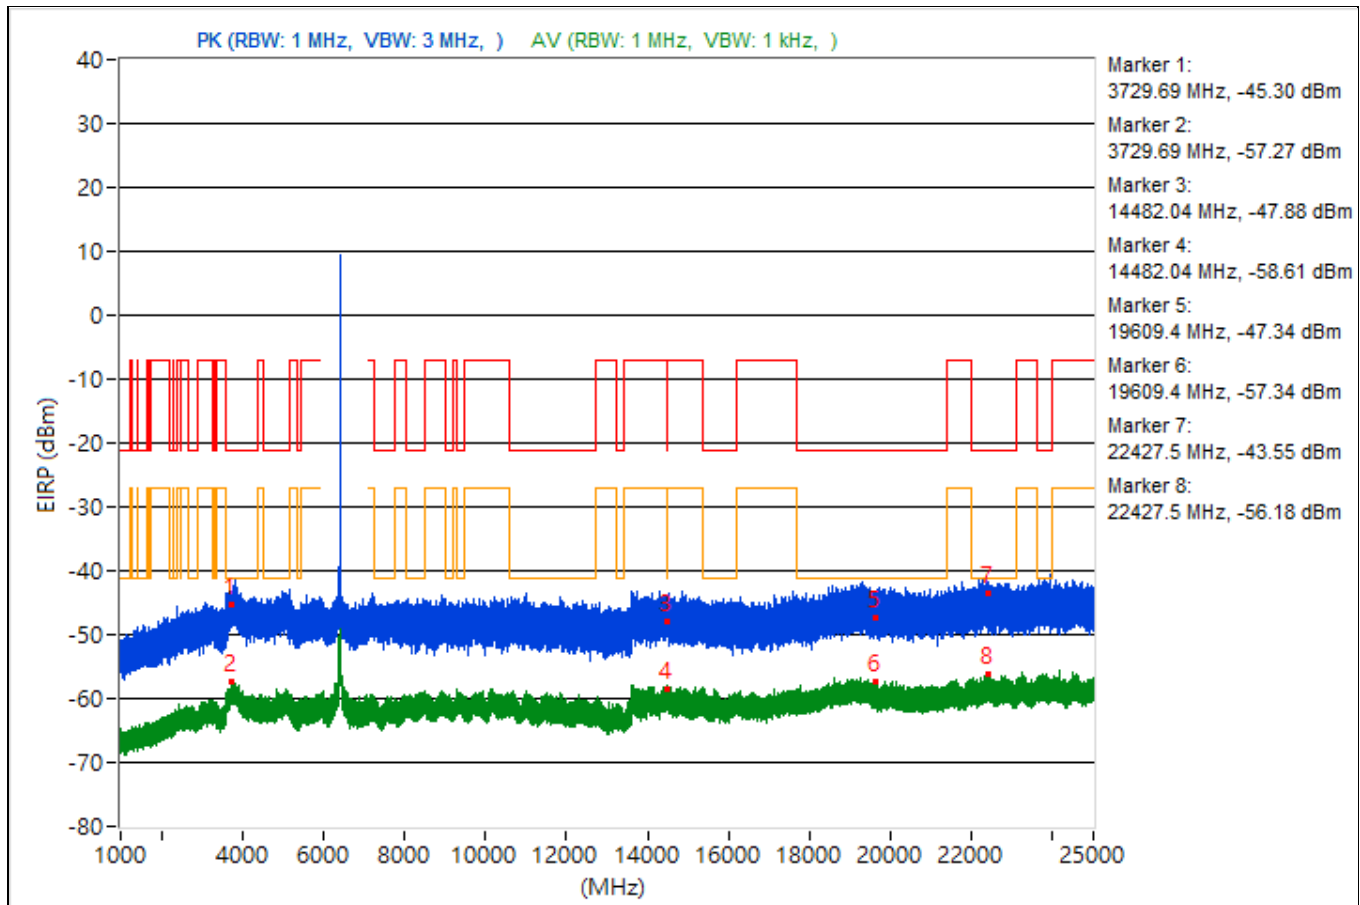


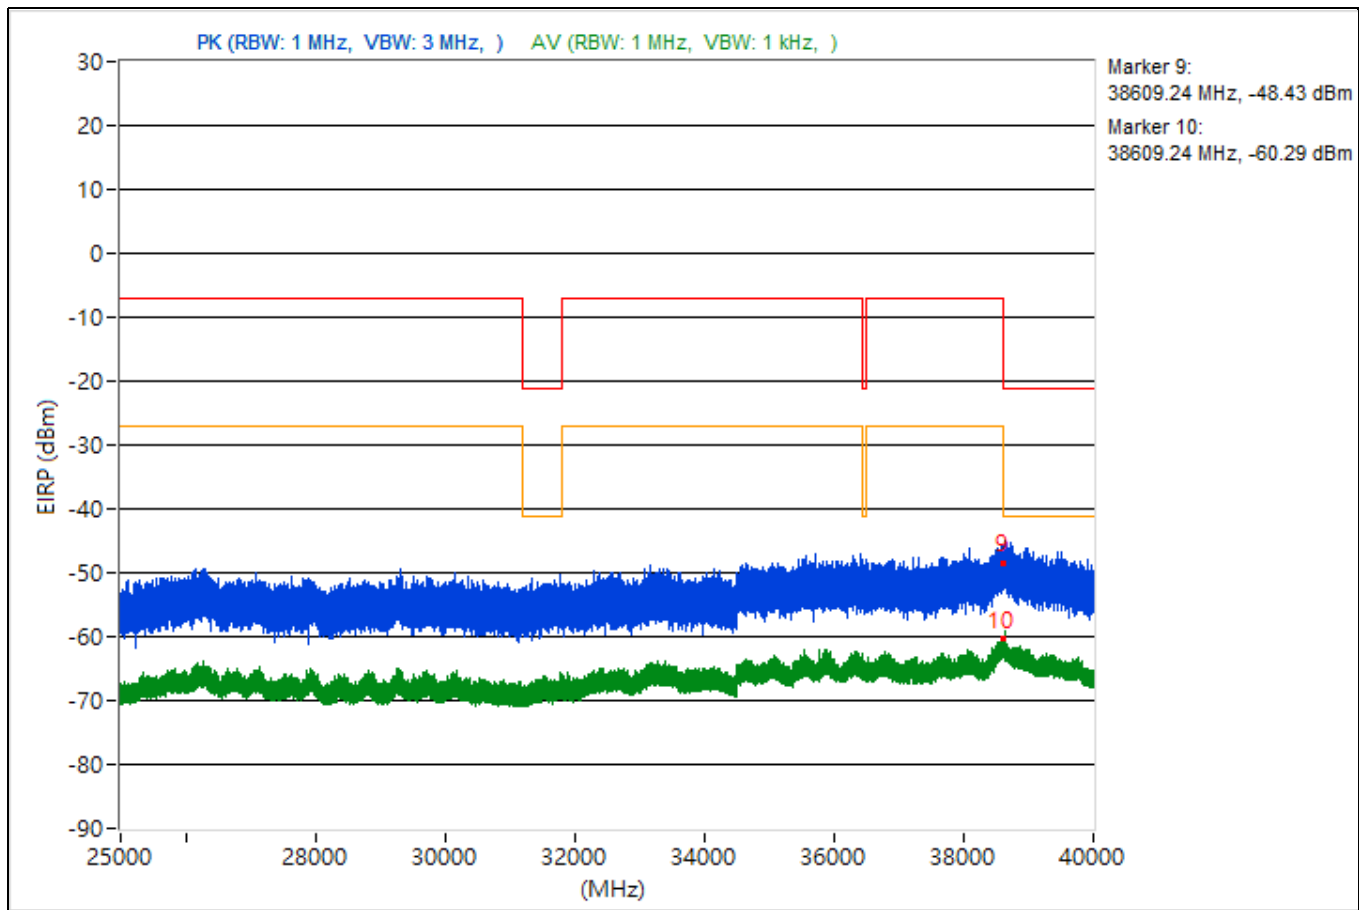


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.6	50.86 PK	74	-23.14	-51.57	-53.24	4.92	-44.4
2	3756.6	37.72 AV	54	-16.28	-64	-67.71	4.92	-57.54
3	14472.44	47.02 PK	74	-26.98	-54.83	-58.1	4.92	-48.24
4	14472.44	36.45 AV	54	-17.55	-65.05	-69.53	4.92	-58.81
5	19002.7	49.34 PK	74	-24.66	-57.15	-52	4.92	-45.92
6	19002.7	39.18 AV	54	-14.82	-63.12	-65.14	4.92	-56.08
7	22458.4	50.74 PK	74	-23.26	-51.52	-53.64	4.92	-44.52
8	22458.4	38.6 AV	54	-15.4	-67.32	-62.93	4.92	-56.66
9	38630.13	45.55 PK	74	-28.45	-56.66	-58.9	4.92	-49.71
10	38630.13	34.39 AV	54	-19.61	-70.84	-67.43	4.92	-60.87

Note: Margin value = Emission Level - Limit value

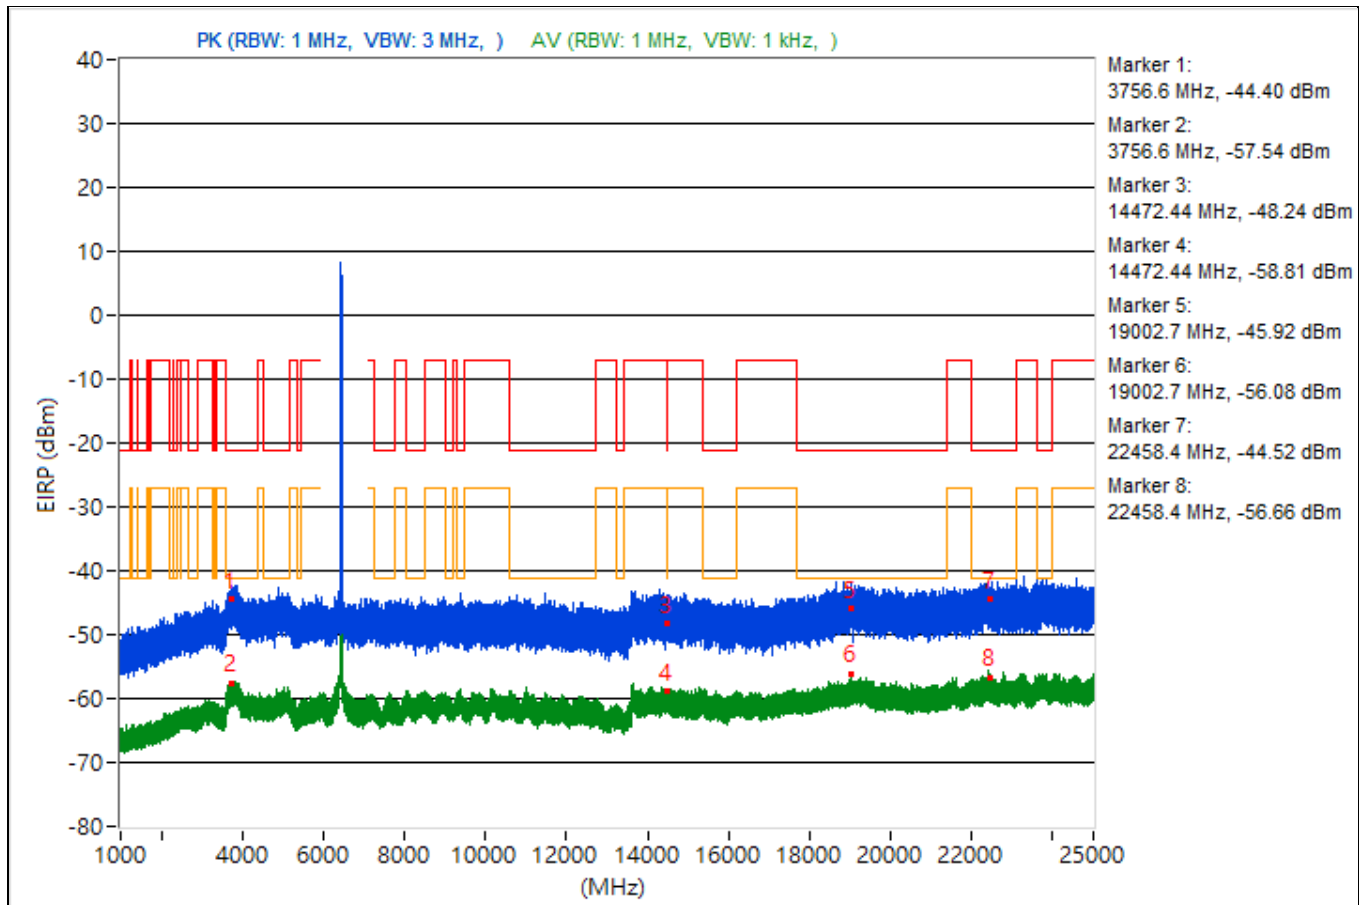


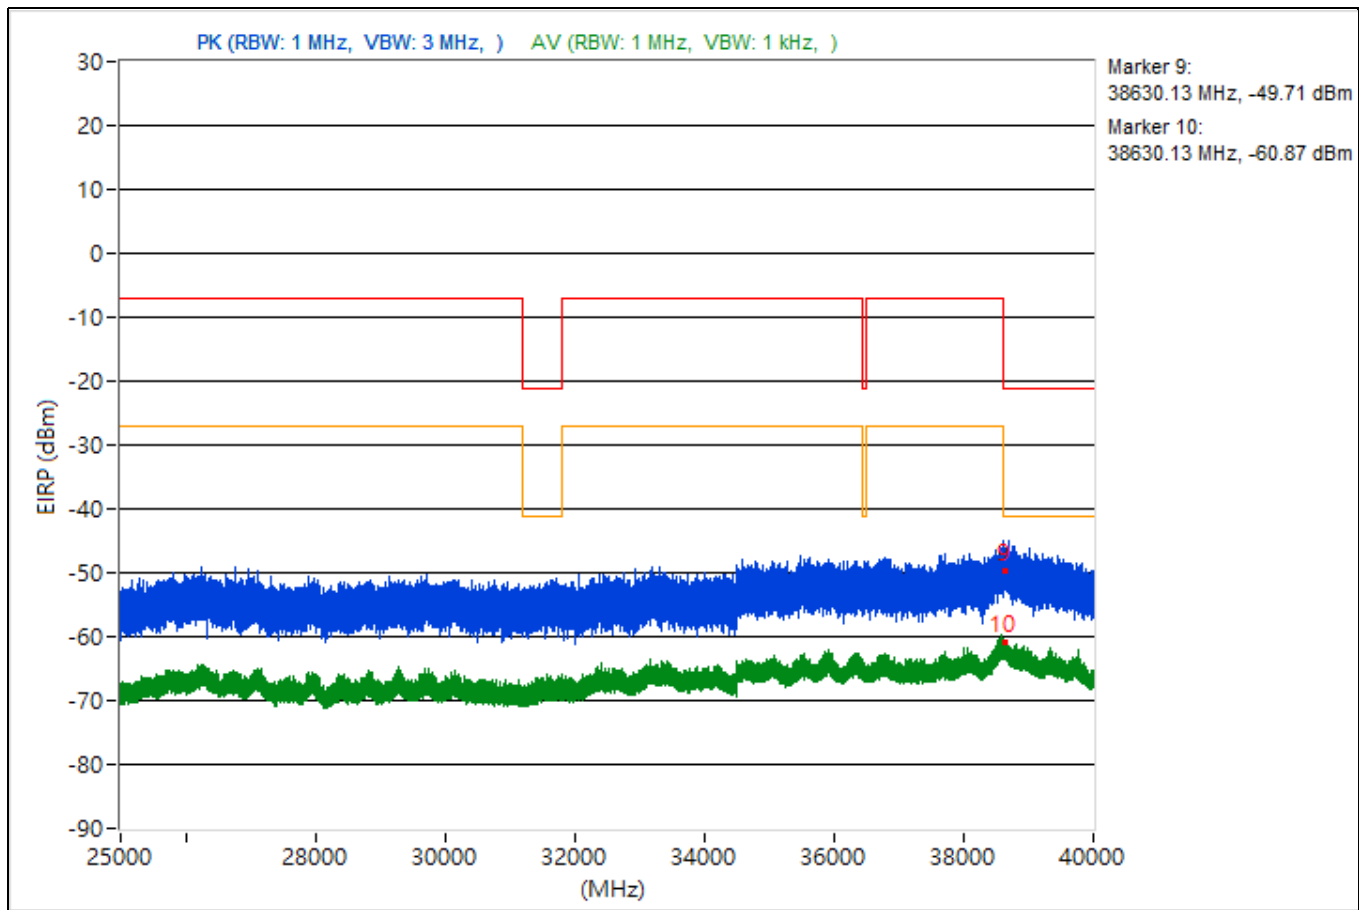


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3737.39	48.61 PK	74	-25.39	-53.75	-55.61	4.92	-46.65
2	3737.39	37.83 AV	54	-16.17	-66.83	-64.26	4.92	-57.43
3	14488.89	46.85 PK	74	-27.15	-55.09	-58.1	4.92	-48.41
4	14488.89	36.49 AV	54	-17.51	-68.86	-65.26	4.92	-58.77
5	19233.1	48.24 PK	74	-25.76	-54.82	-55.09	4.92	-47.02
6	19233.1	38 AV	54	-16	-66.98	-63.92	4.92	-57.26
7	22379.9	50.2 PK	74	-23.8	-56.34	-51.12	4.92	-45.06
8	22379.9	38.97 AV	54	-15.03	-66.12	-62.89	4.92	-56.29
9	38641.51	46.1 PK	74	-27.9	-56.35	-57.98	4.92	-49.16
10	38641.51	35.31 AV	54	-18.69	-69.76	-66.57	4.92	-59.95

Note: Margin value = Emission Level - Limit value

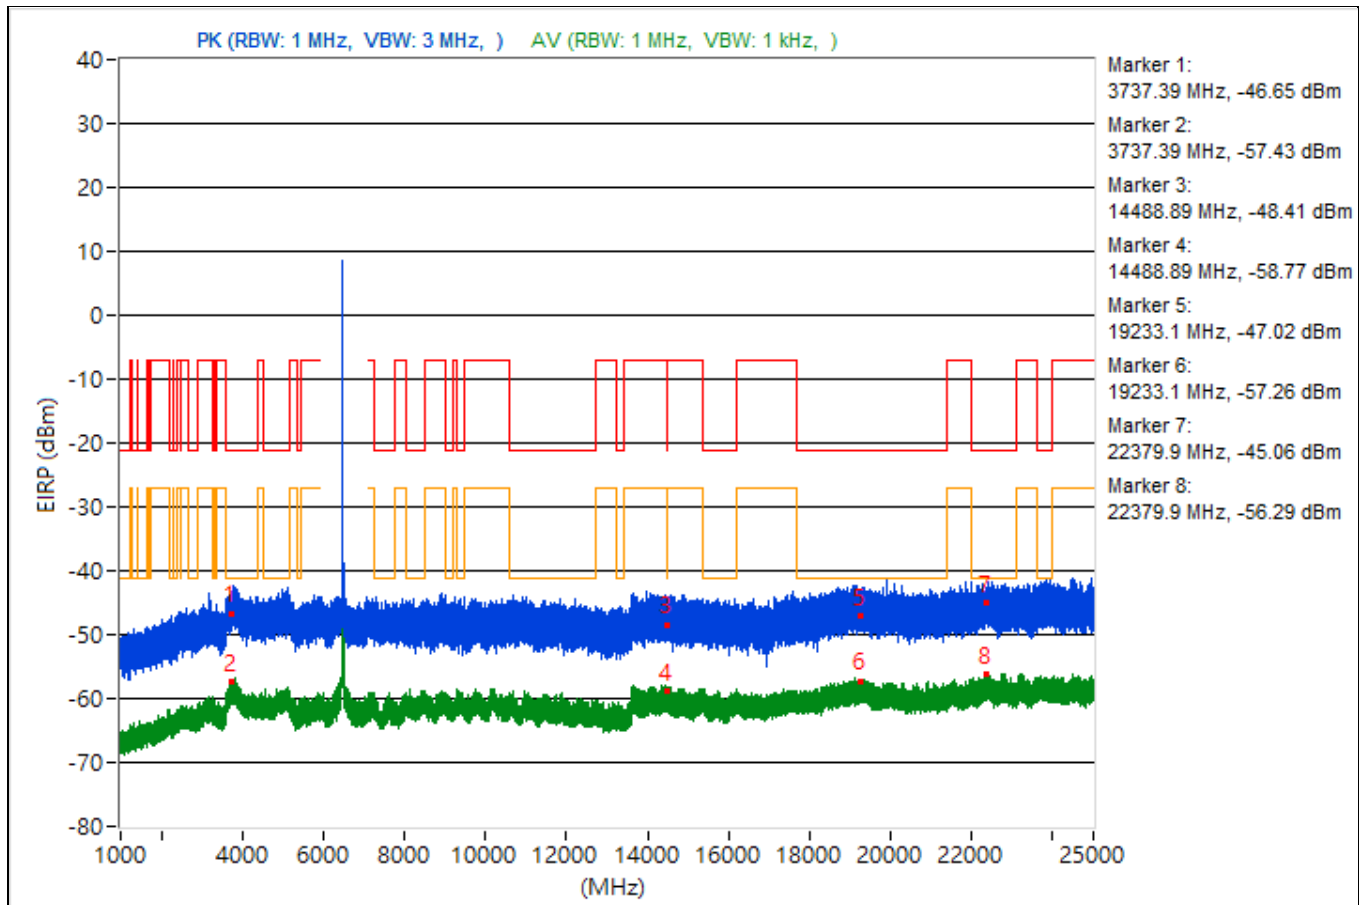


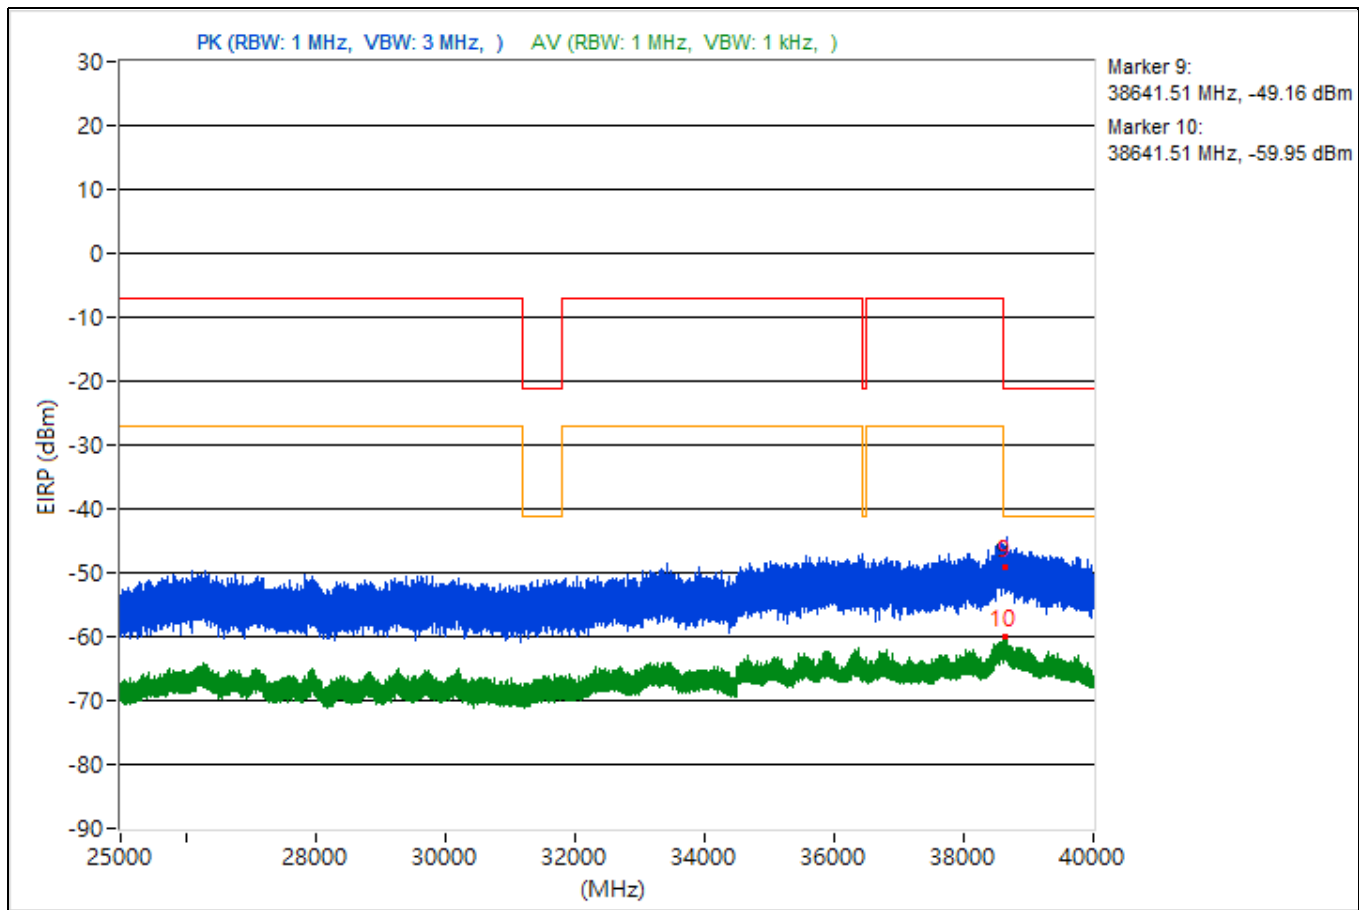


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.22	49.34 PK	74	-24.66	-53.93	-53.77	4.92	-45.92
2	3771.22	37.84 AV	54	-16.16	-64.11	-67.09	4.92	-57.42
3	8451.56	47.65 PK	74	-26.35	-57.74	-54.08	4.92	-47.61
4	8451.56	36.68 AV	54	-17.32	-65.55	-67.75	4.92	-58.58
5	19335.5	49.13 PK	74	-24.87	-52.83	-55.79	4.92	-46.13
6	19335.5	38.48 AV	54	-15.52	-63.52	-66.36	4.92	-56.78
7	23634.8	50.68 PK	74	-23.32	-54.82	-51.01	4.92	-44.58
8	23634.8	38.8 AV	54	-15.2	-66.22	-63.1	4.92	-56.46
9	38625.24	44.71 PK	74	-29.29	-56.9	-60.99	4.92	-50.55
10	38625.24	35.23 AV	54	-18.77	-68.85	-67.23	4.92	-60.03

Note: Margin value = Emission Level - Limit value

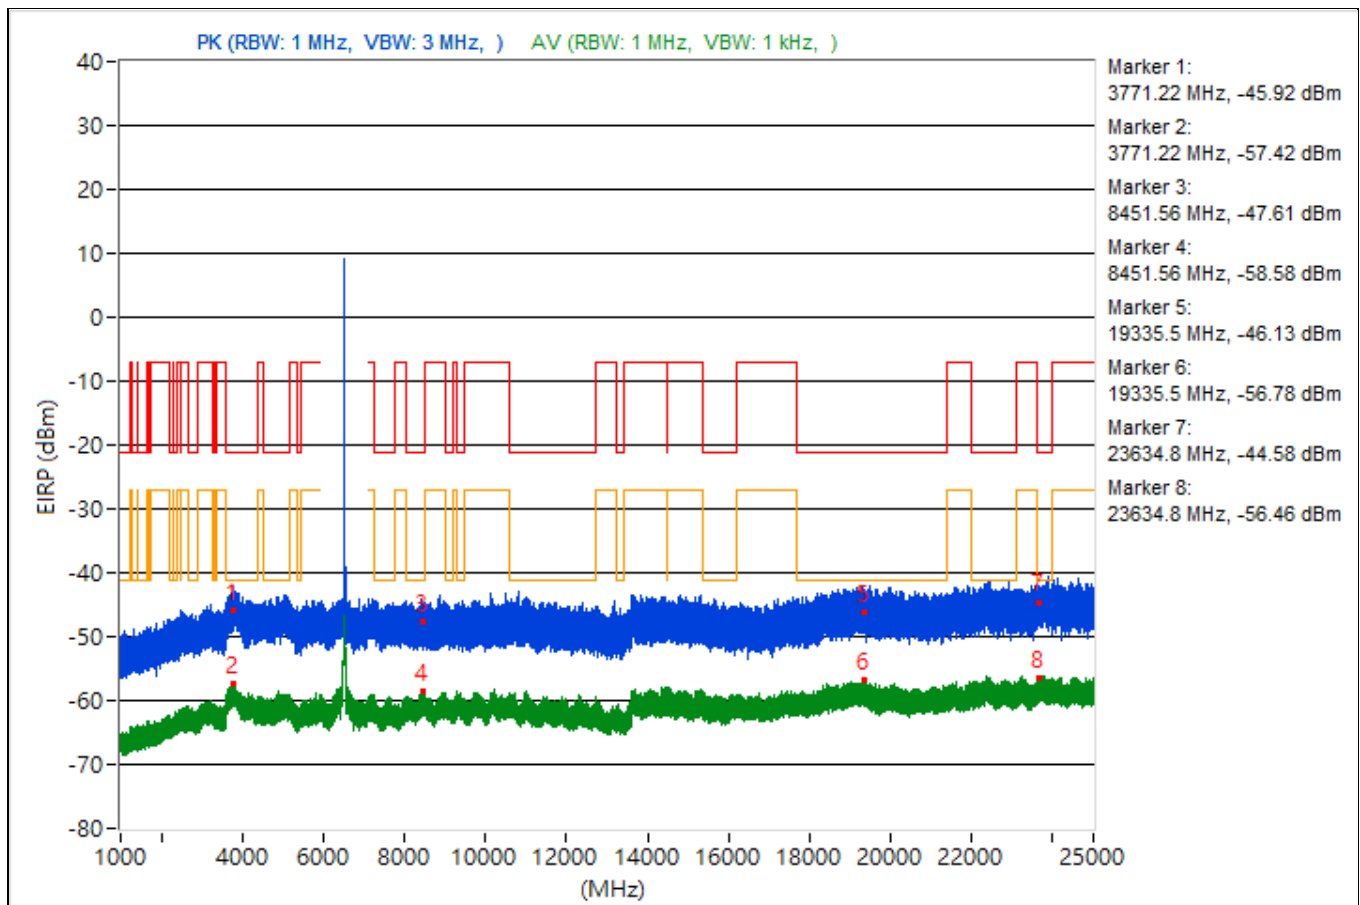


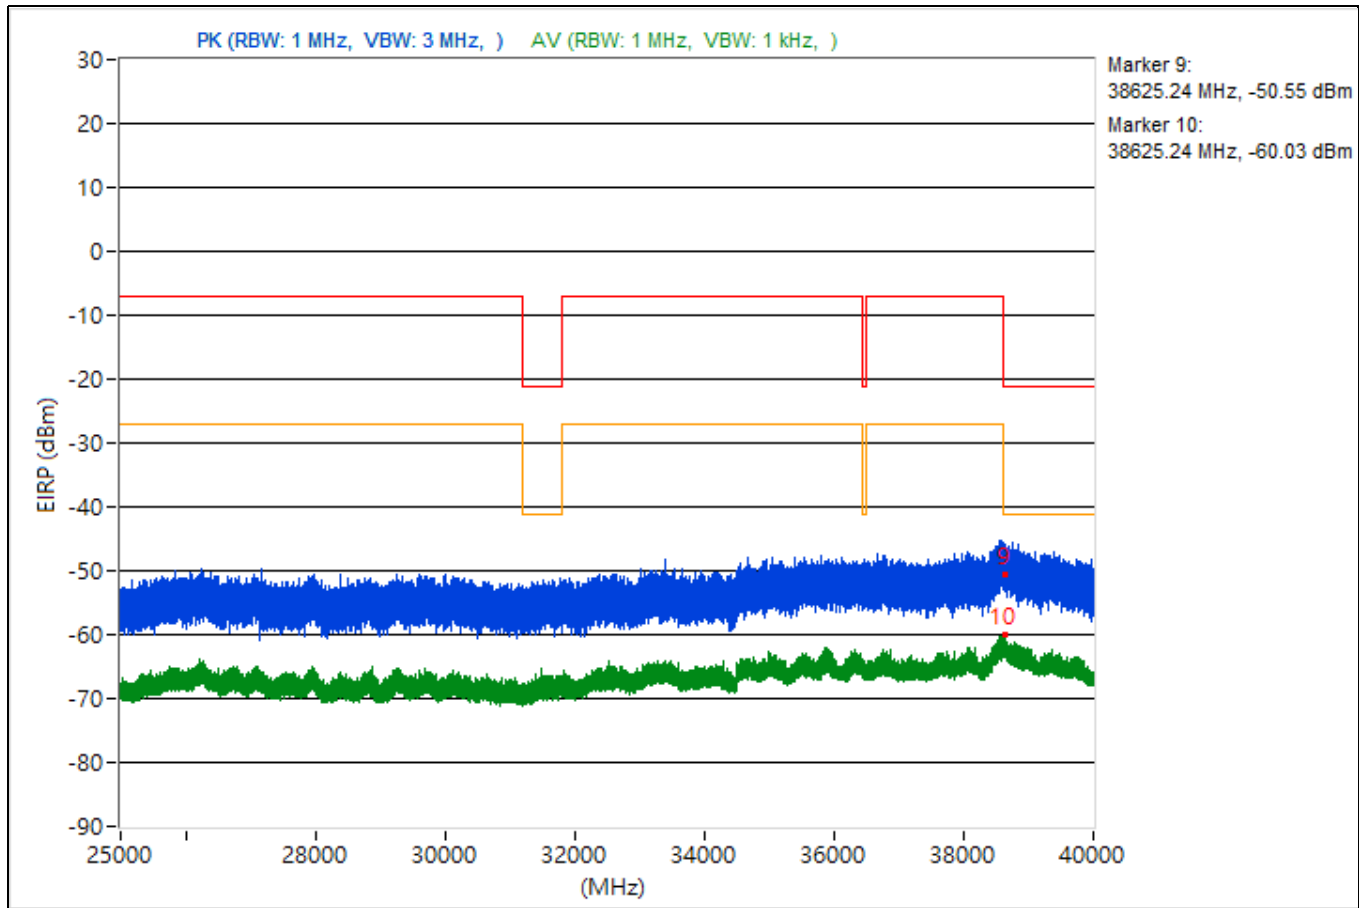


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.32	49.98 PK	74	-24.02	-53.17	-53.25	4.92	-45.28
2	3801.32	38.1 AV	54	-15.9	-64.37	-65.94	4.92	-57.16
3	15671.29	46.28 PK	74	-27.72	-58.82	-55.59	4.92	-48.98
4	15671.29	37.25 AV	54	-16.75	-66.94	-65.13	4.92	-58.01
5	19427.5	48.42 PK	74	-25.58	-54.44	-55.13	4.92	-46.84
6	19427.5	38.41 AV	54	-15.59	-66.93	-63.35	4.92	-56.85
7	22417.6	50.68 PK	74	-23.32	-53.01	-52.05	4.92	-44.58
8	22417.6	39.17 AV	54	-14.83	-63.18	-65.07	4.92	-56.09
9	38607.73	46.43 PK	74	-27.57	-57.16	-56.39	4.92	-48.83
10	38607.73	35.29 AV	54	-18.71	-66.84	-69.32	4.92	-59.97

Note: Margin value = Emission Level - Limit value

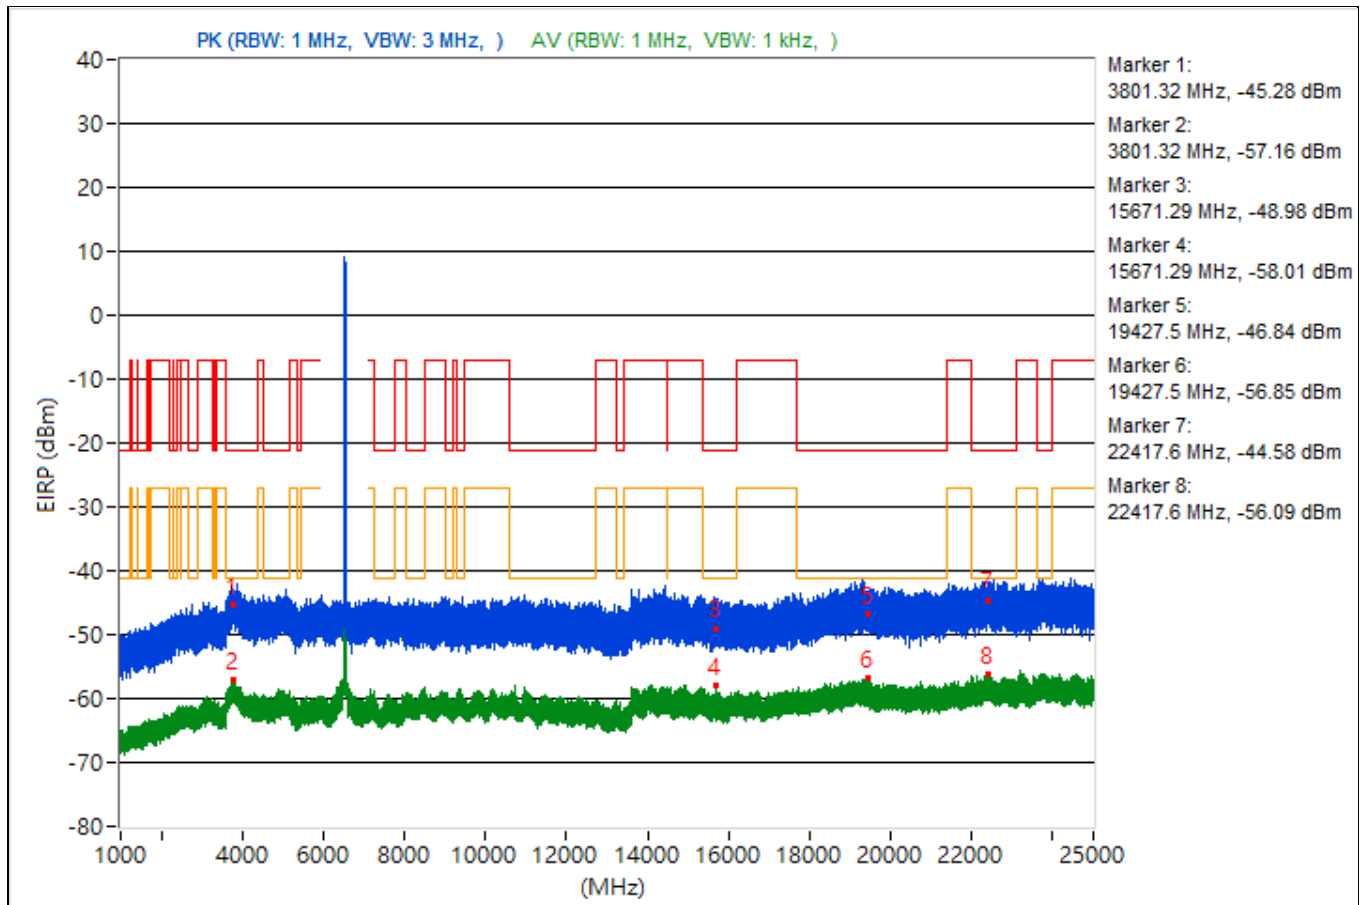


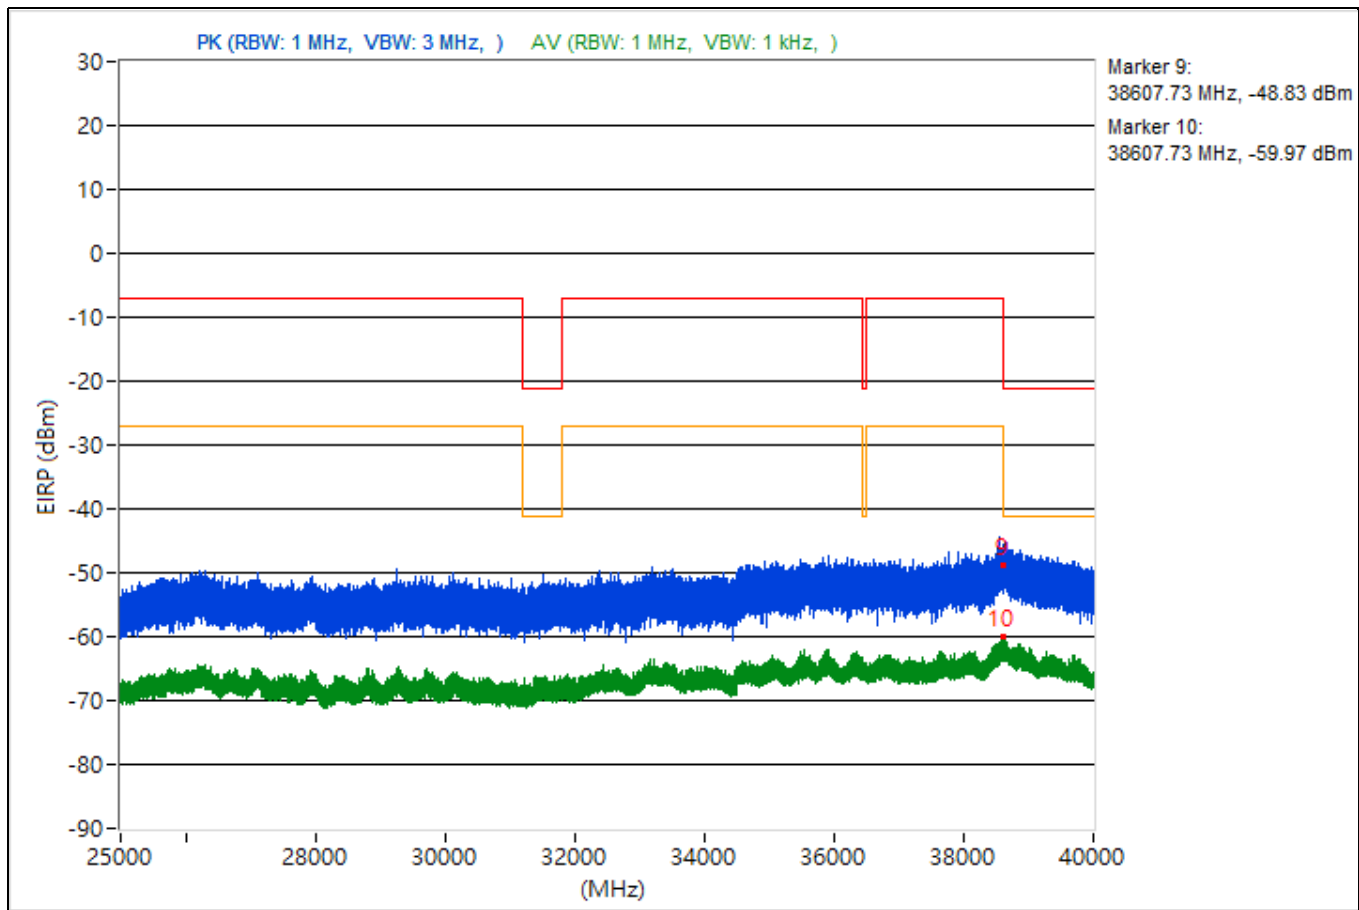


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.06	50.89 PK	74	-23.11	-51.37	-53.49	4.92	-44.37
2	3777.06	38.21 AV	54	-15.79	-66.24	-64.01	4.92	-57.05
3	14499.29	48.96 PK	74	-25.04	-55.82	-53.07	4.92	-46.3
4	14499.29	37.14 AV	54	-16.86	-67.94	-64.73	4.92	-58.12
5	19133	50.31 PK	74	-23.69	-51.83	-54.29	4.92	-44.95
6	19133	38.64 AV	54	-15.36	-63.86	-65.36	4.92	-56.62
7	22878.8	51.62 PK	74	-22.38	-49.78	-54.66	4.92	-43.64
8	22878.8	39 AV	54	-15	-62.93	-65.98	4.92	-56.26
9	38606.04	47.08 PK	74	-26.92	-54.46	-58.81	4.92	-48.18
10	38606.04	35.04 AV	54	-18.96	-69.51	-67.12	4.92	-60.22

Note: Margin value = Emission Level - Limit value

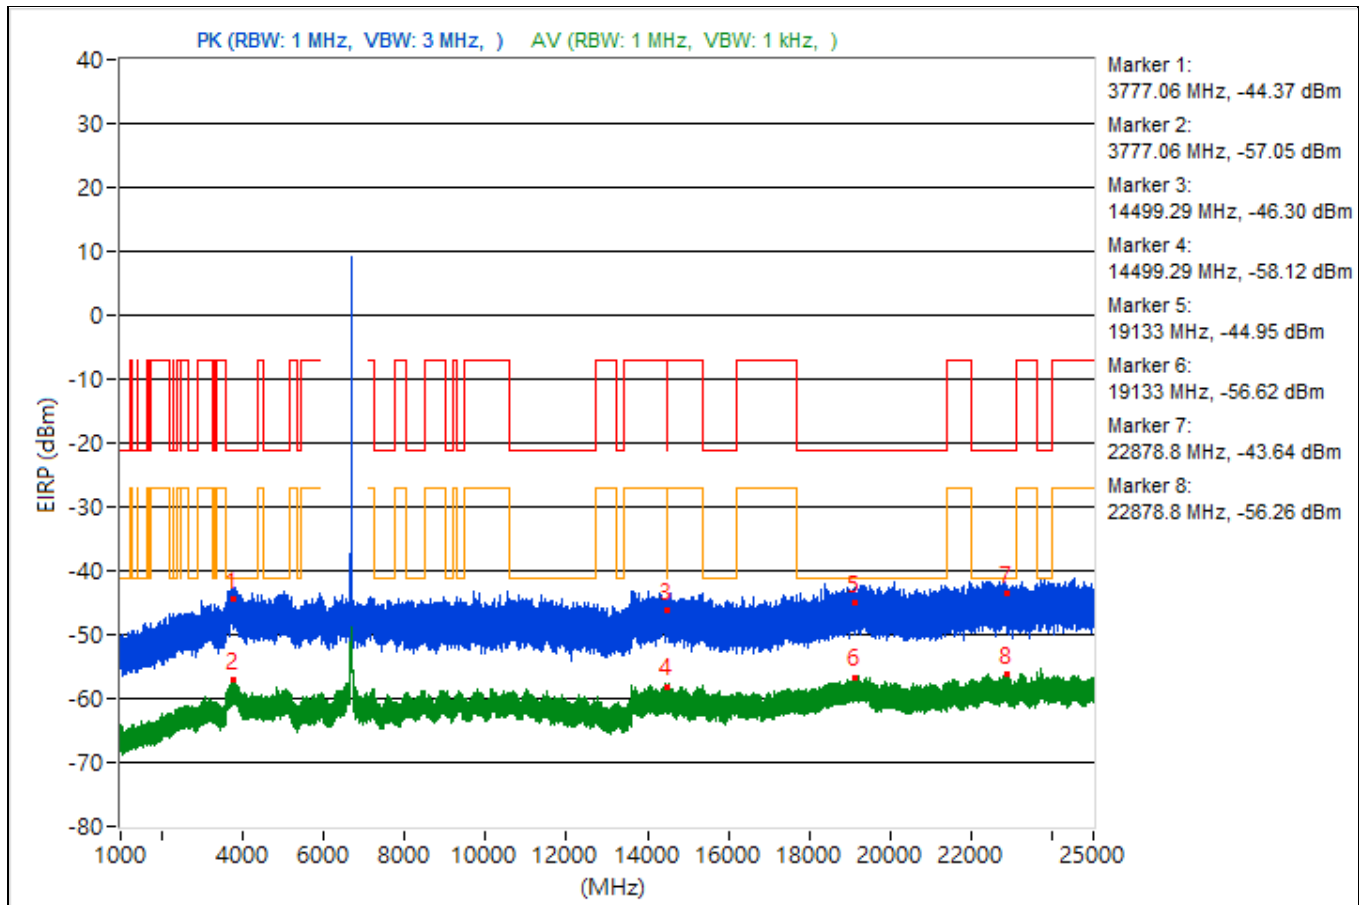


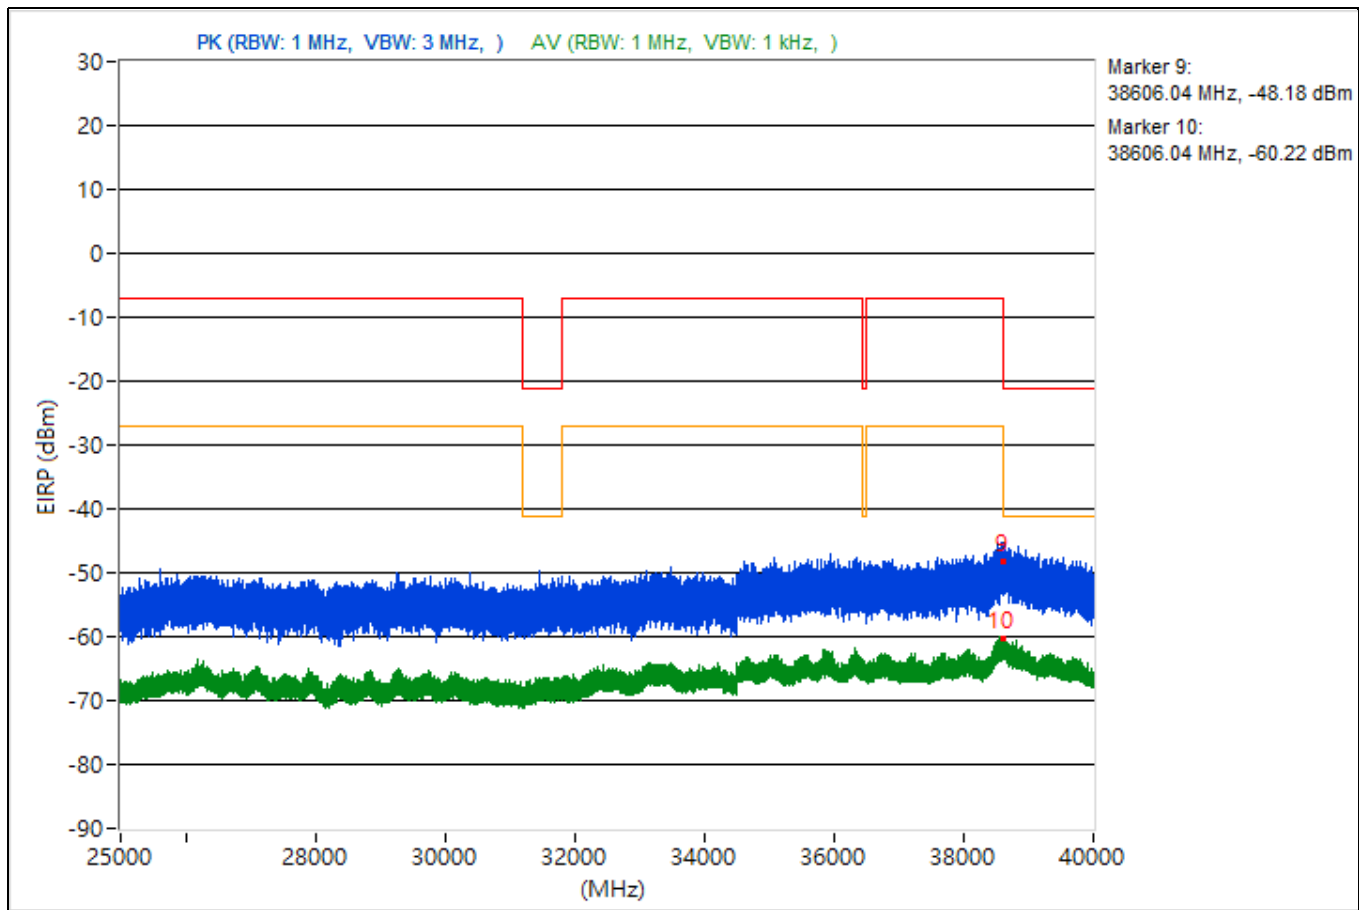


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3845.89	48.51 PK	74	-25.49	-56.5	-53.4	4.92	-46.75
2	3845.89	38.14 AV	54	-15.86	-66.06	-64.23	4.92	-57.12
3	14477.33	46.23 PK	74	-27.77	-56.49	-57.5	4.92	-49.03
4	14477.33	36.61 AV	54	-17.39	-68.77	-65.13	4.92	-58.65
5	19281.1	48.3 PK	74	-25.7	-56.18	-53.89	4.92	-46.96
6	19281.1	38.49 AV	54	-15.51	-65.59	-63.97	4.92	-56.77
7	22435	50.1 PK	74	-23.9	-52.85	-53.35	4.92	-45.16
8	22435	39.11 AV	54	-14.89	-65.46	-63.03	4.92	-56.15
9	38673.78	48.09 PK	74	-25.91	-55.29	-54.93	4.92	-47.17
10	38673.78	34.23 AV	54	-19.77	-71.51	-67.37	4.92	-61.03

Note: Margin value = Emission Level - Limit value

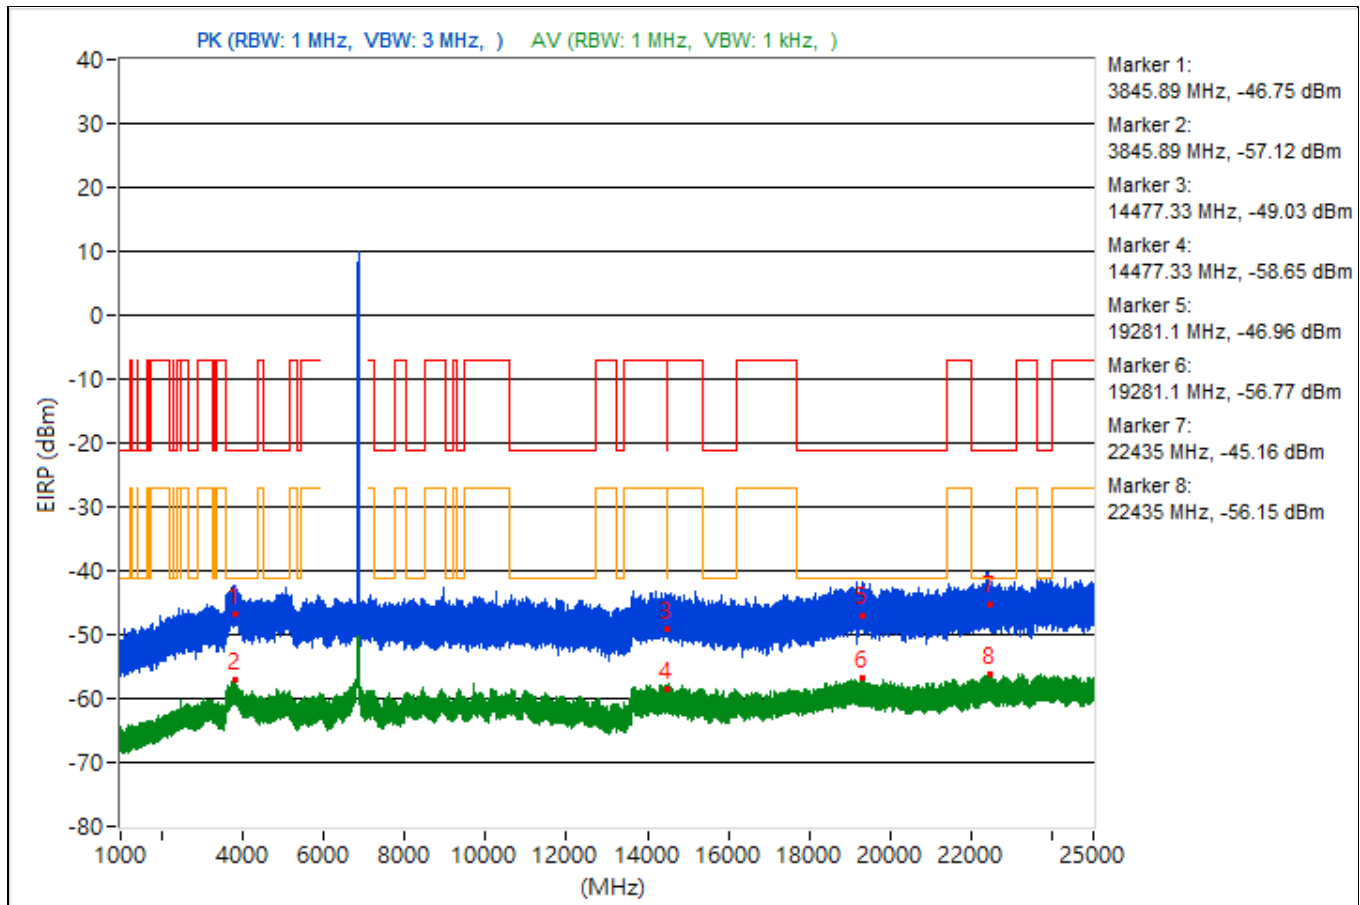


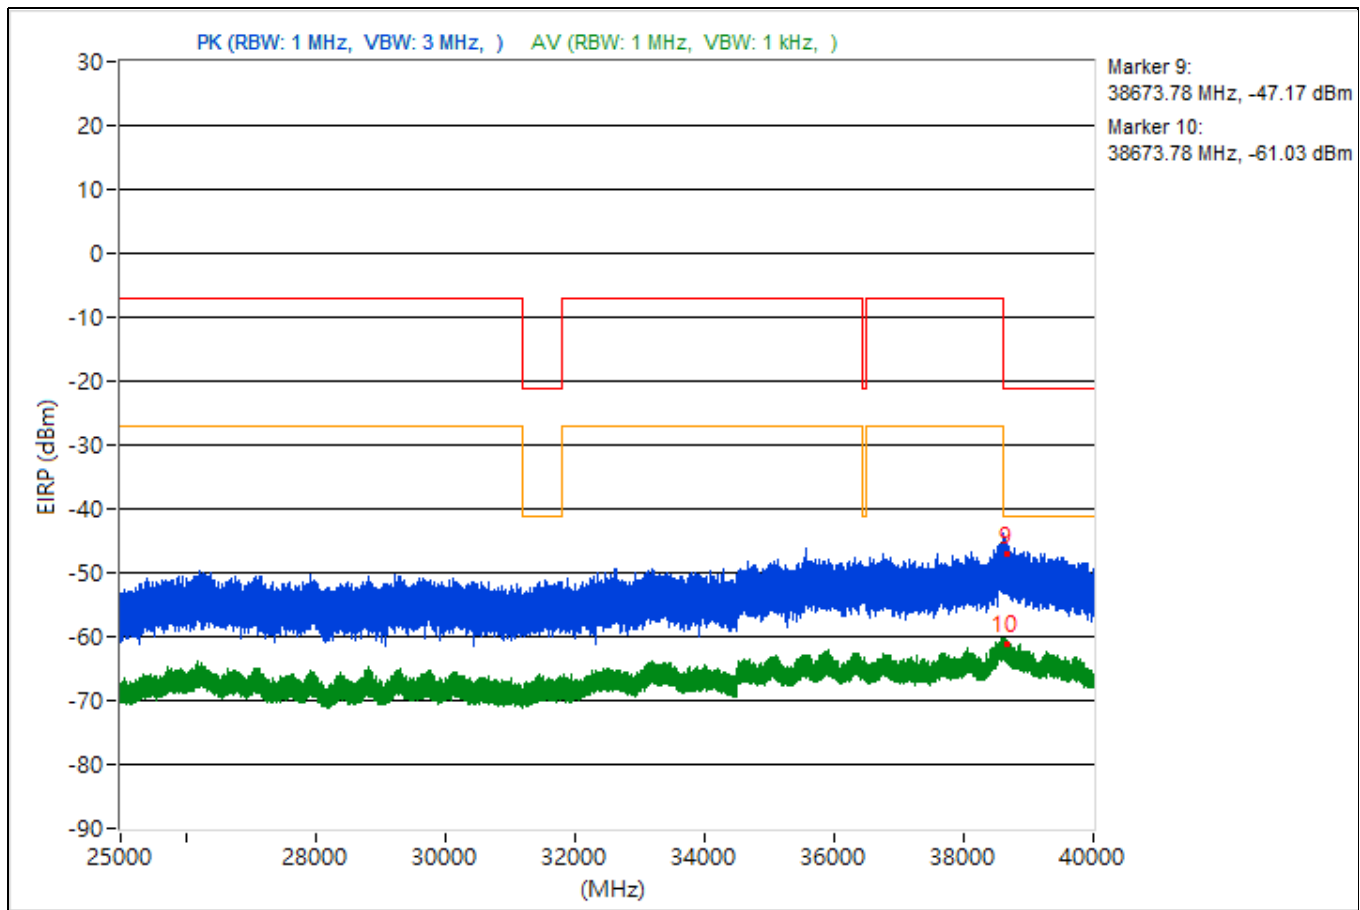


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.03	48.97 PK	74	-25.03	-54.09	-54.35	4.92	-46.29
2	3817.03	38.07 AV	54	-15.93	-65.85	-64.49	4.92	-57.19
3	15366.22	48.72 PK	74	-25.28	-55.19	-53.86	4.92	-46.54
4	15366.22	37.12 AV	54	-16.88	-65.34	-66.95	4.92	-58.14
5	19408.4	47.75 PK	74	-26.25	-56.99	-54.3	4.92	-47.51
6	19408.4	38.33 AV	54	-15.67	-63.74	-66.37	4.92	-56.93
7	23789.6	51.71 PK	74	-22.29	-51.4	-51.57	4.92	-43.55
8	23789.6	39.21 AV	54	-14.79	-63.13	-65.03	4.92	-56.05
9	38663.73	43.46 PK	74	-30.54	-59.1	-60.47	4.92	-51.8
10	38663.73	34.94 AV	54	-19.06	-69.42	-67.32	4.92	-60.32

Note: Margin value = Emission Level - Limit value

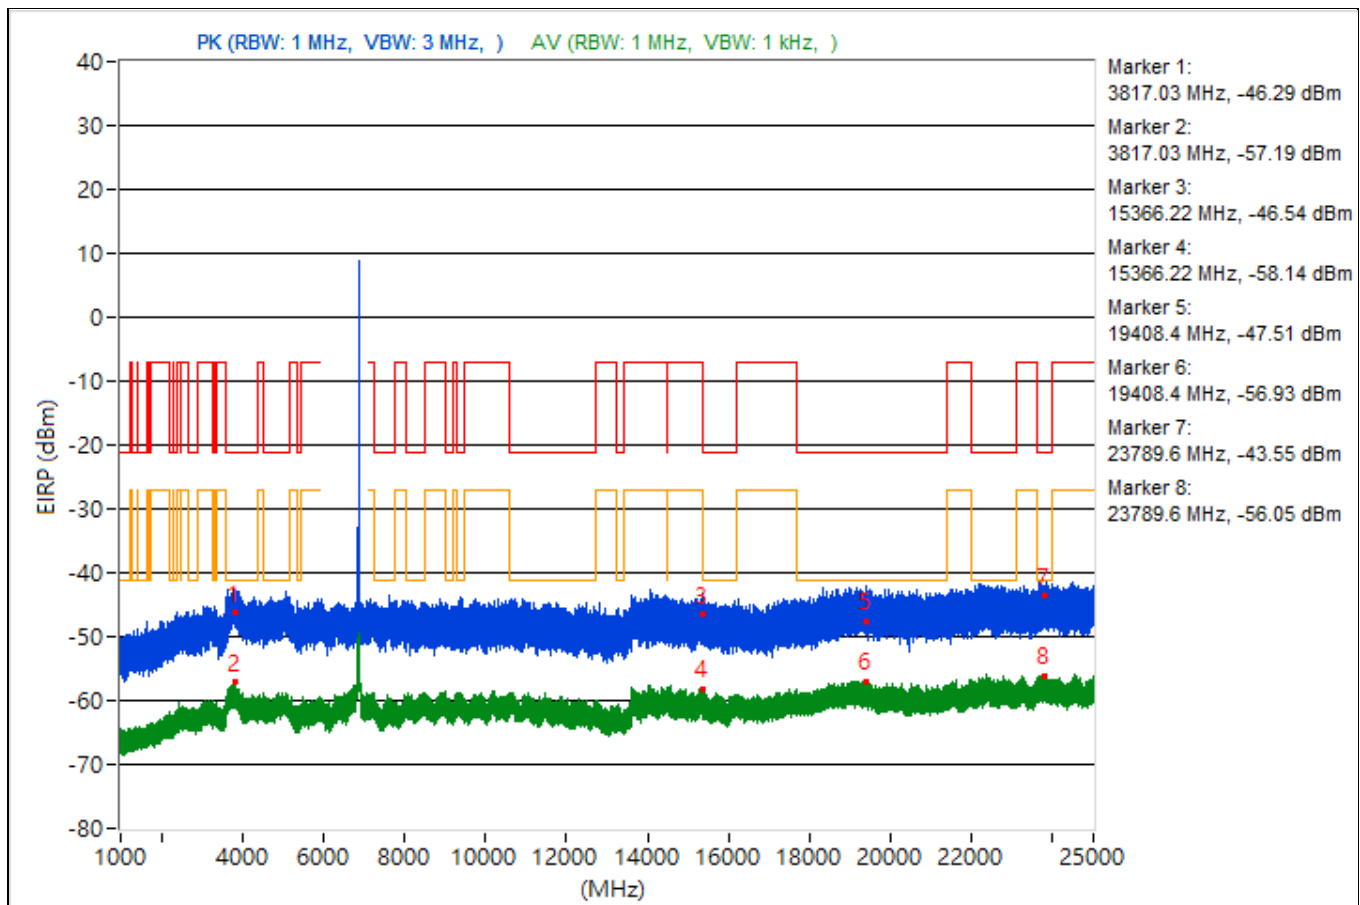


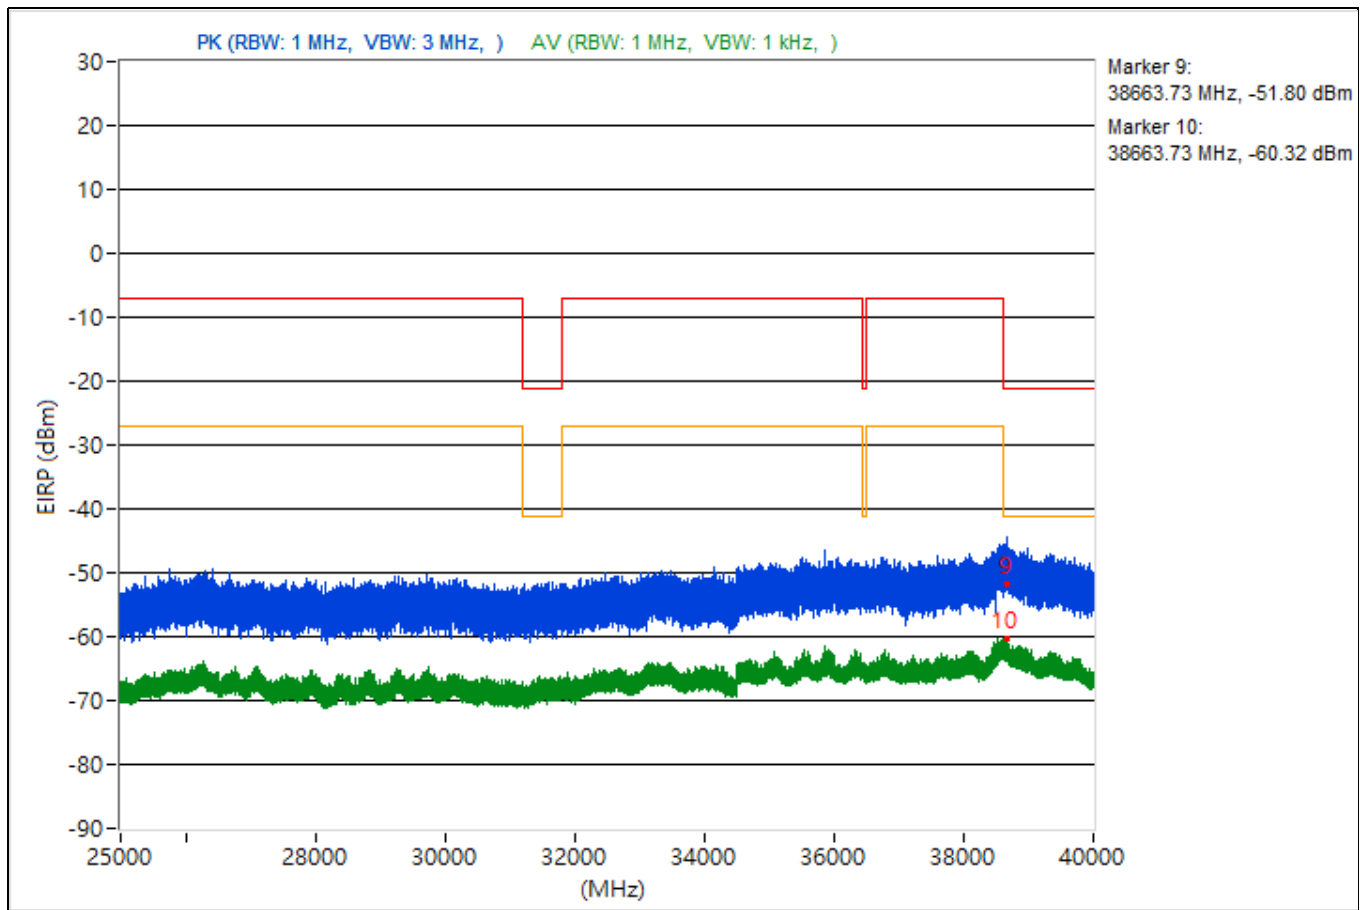


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3841.07	49.96 PK	74	-24.04	-52.56	-54.02	4.92	-45.3
2	3841.07	37.9 AV	54	-16.1	-66.66	-64.25	4.92	-57.36
3	7263.99	48.49 PK	74	-25.51	-54.65	-54.75	4.92	-46.77
4	7263.99	37.29 AV	54	-16.71	-66.93	-65.06	4.92	-57.97
5	19230.6	50.59 PK	74	-23.41	-51.35	-54.36	4.92	-44.67
6	19230.6	38.05 AV	54	-15.95	-63.76	-67.18	4.92	-57.21
7	23848.7	51.26 PK	74	-22.74	-51.13	-52.91	4.92	-44
8	23848.7	39.48 AV	54	-14.52	-63.15	-64.34	4.92	-55.78
9	38685.07	45.28 PK	74	-28.72	-57.44	-58.43	4.92	-49.98
10	38685.07	34.58 AV	54	-19.42	-67.34	-70.4	4.92	-60.68

Note: Margin value = Emission Level - Limit value

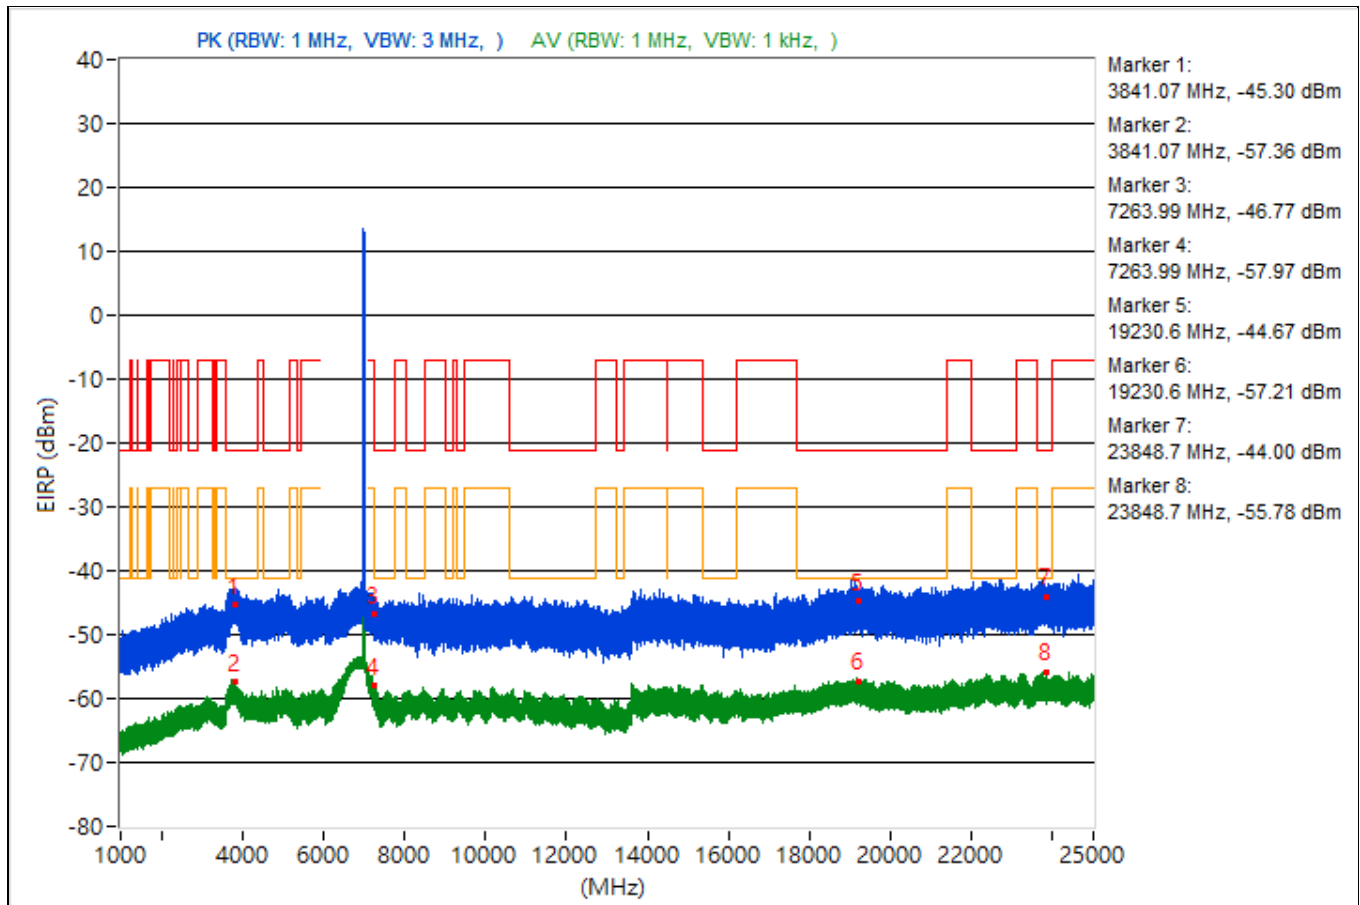


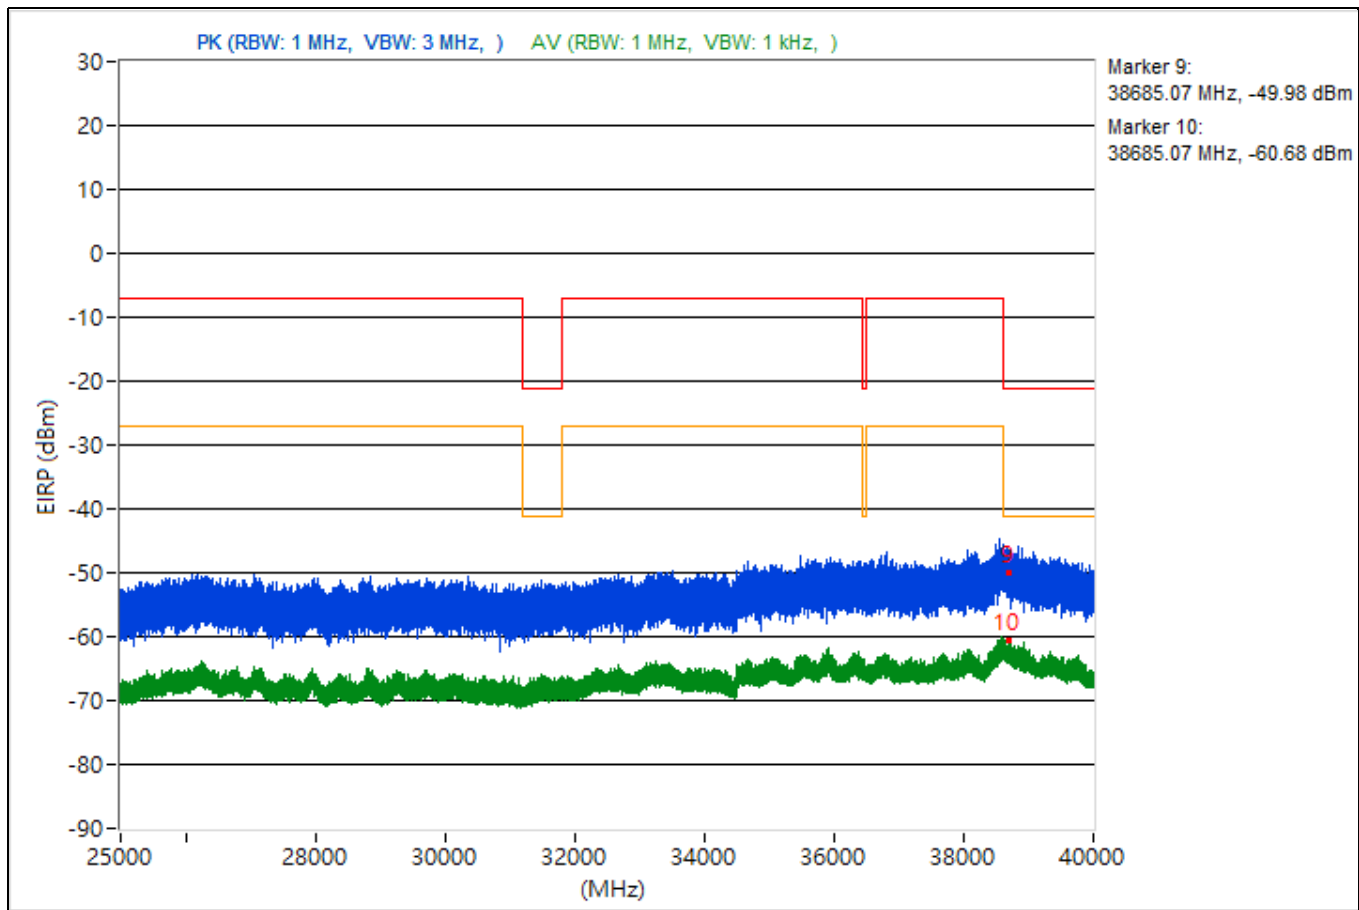


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.99	49.42 PK	74	-24.58	-53.59	-53.97	4.92	-45.84
2	3798.99	38.46 AV	54	-15.54	-64.41	-65.09	4.92	-56.8
3	14477.6	49.92 PK	74	-24.08	-54.98	-52.04	4.92	-45.34
4	14477.6	37.67 AV	54	-16.33	-65.03	-66.07	4.92	-57.59
5	19294	48.58 PK	74	-25.42	-54.77	-54.45	4.92	-46.68
6	19294	38.3 AV	54	-15.7	-63.86	-66.24	4.92	-56.96
7	22016.2	50.91 PK	74	-23.09	-50.78	-54.61	4.92	-44.35
8	22016.2	39.74 AV	54	-14.26	-63.06	-63.89	4.92	-55.52
9	38624	44.03 PK	74	-29.97	-59.9	-58.52	4.92	-51.23
10	38624	35.02 AV	54	-18.98	-69.32	-67.27	4.92	-60.24

Note: Margin value = Emission Level - Limit value

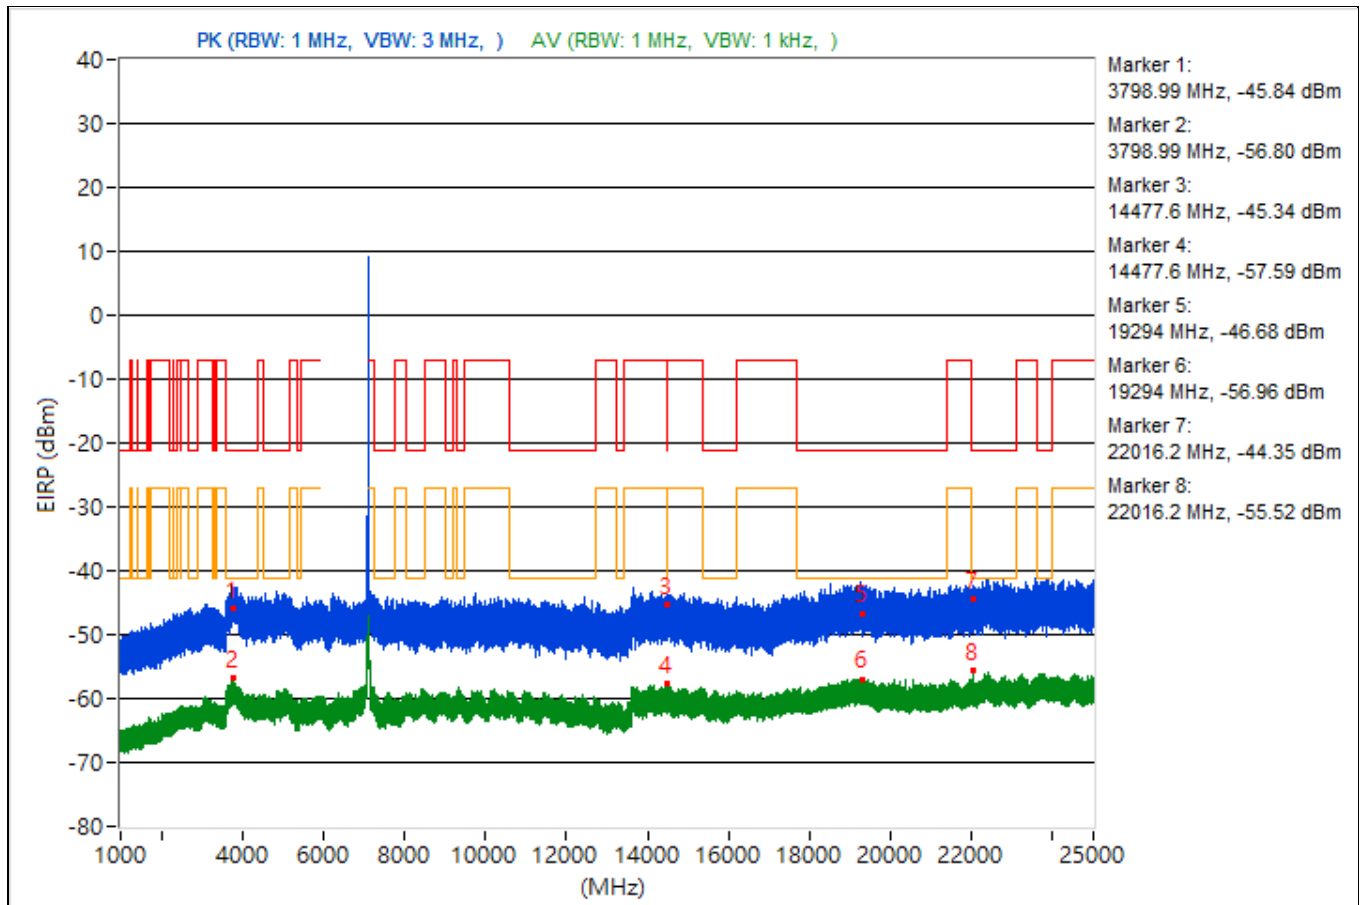


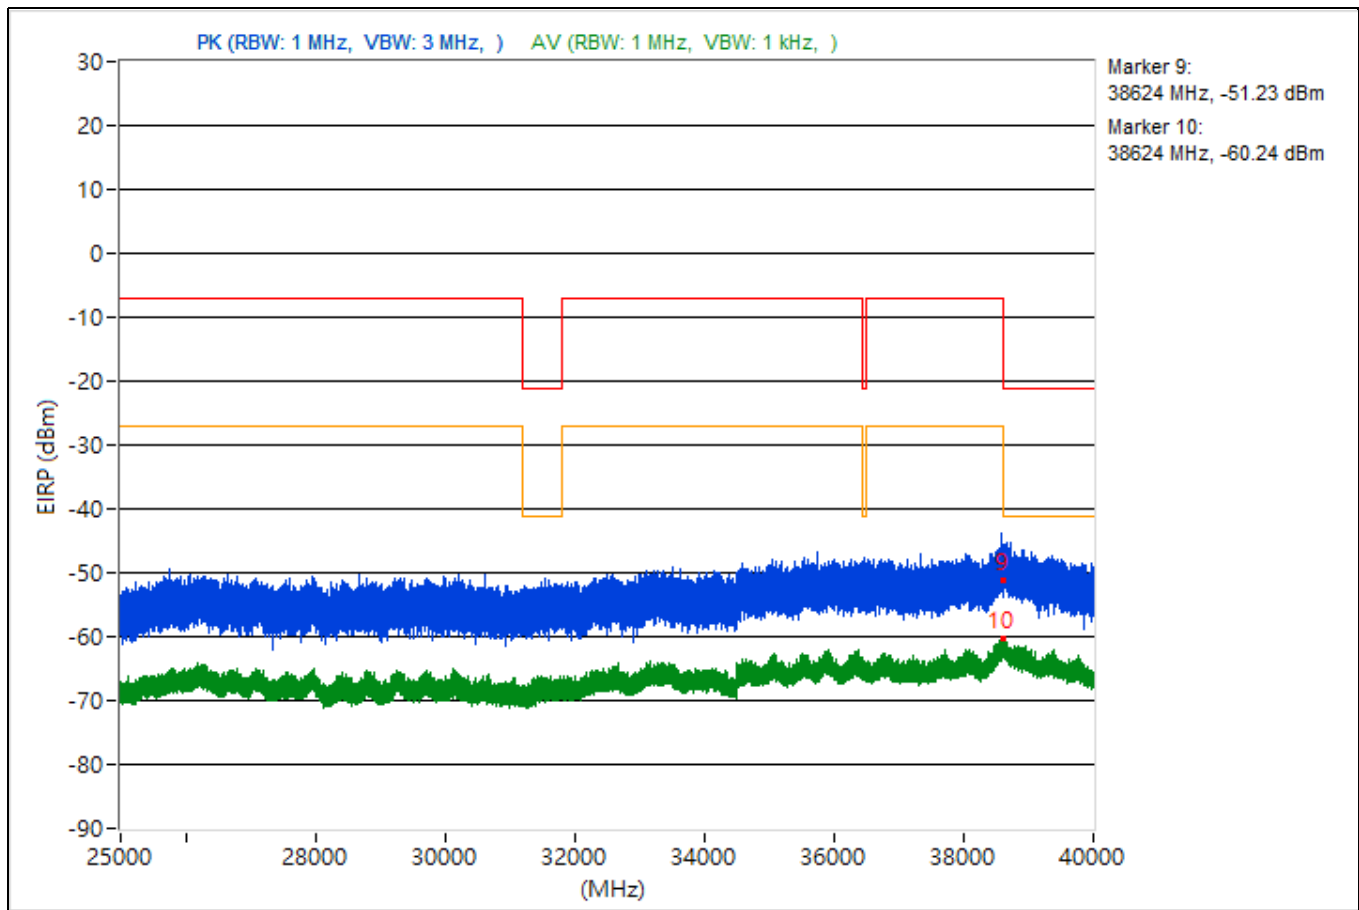


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.64	49.24 PK	74	-24.76	-55.31	-52.92	4.92	-46.02
2	3823.64	37.51 AV	54	-16.49	-67.99	-64.18	4.92	-57.75
3	14485.07	48.51 PK	74	-25.49	-54.58	-54.79	4.92	-46.75
4	14485.07	37.12 AV	54	-16.88	-64.93	-67.64	4.92	-58.14
5	19129.8	50.16 PK	74	-23.84	-54.05	-52.21	4.92	-45.1
6	19129.8	38.33 AV	54	-15.67	-63.91	-66.09	4.92	-56.93
7	22381.4	49.25 PK	74	-24.75	-54.66	-53.31	4.92	-46.01
8	22381.4	39.44 AV	54	-14.56	-63.12	-64.48	4.92	-55.82
9	38617.16	47.11 PK	74	-26.89	-56.07	-56.1	4.92	-48.15
10	38617.16	35.96 AV	54	-18.04	-69.07	-65.94	4.92	-59.3

Note: Margin value = Emission Level - Limit value

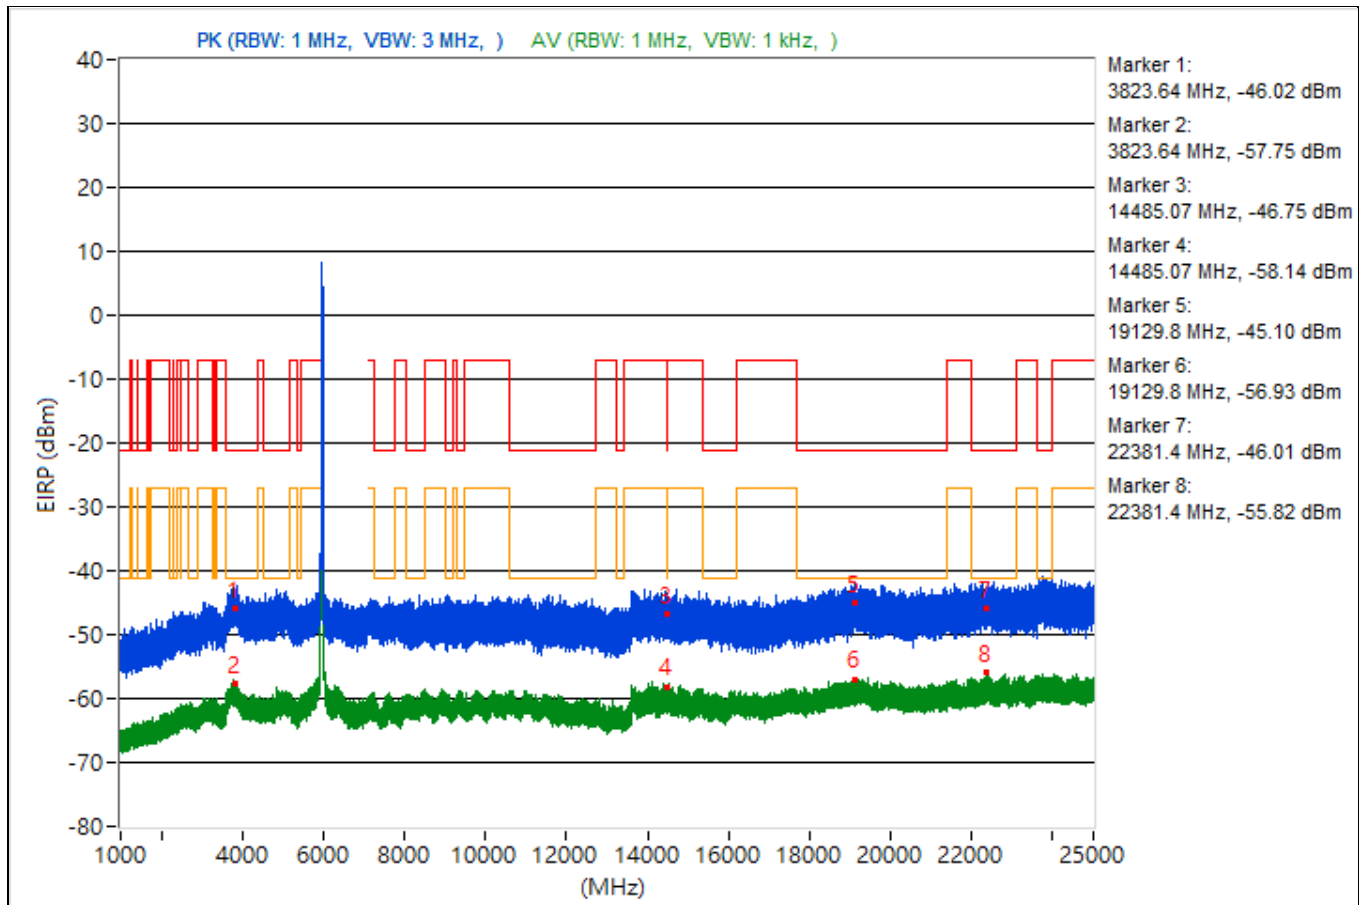


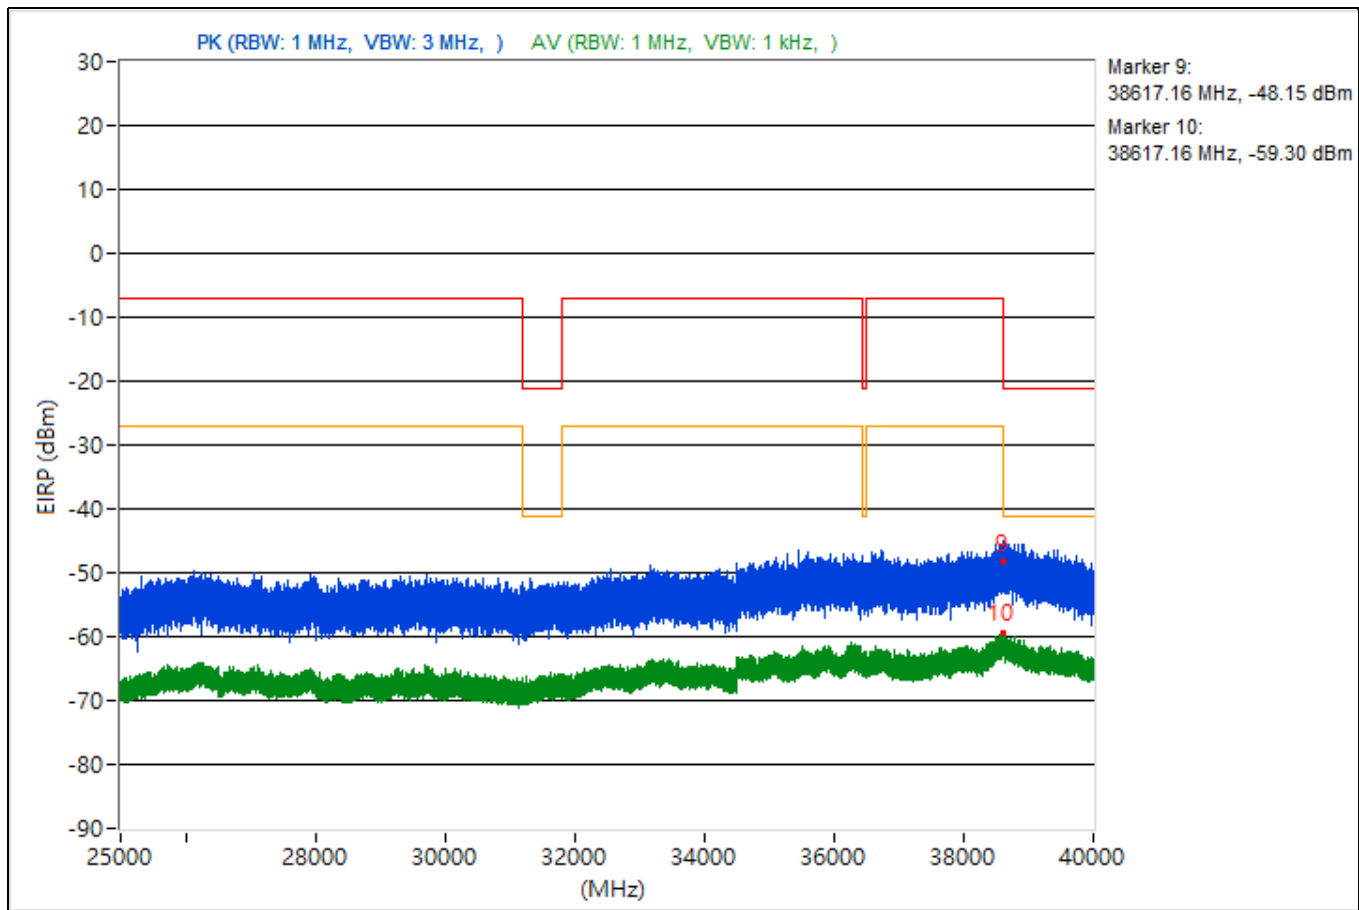


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3730.31	48.11 PK	74	-25.89	-55.02	-55.15	4.92	-47.15
2	3730.31	37.59 AV	54	-16.41	-66.99	-64.55	4.92	-57.67
3	14487.29	47.39 PK	74	-26.61	-54.53	-57.6	4.92	-47.87
4	14487.29	36.86 AV	54	-17.14	-66.97	-65.77	4.92	-58.4
5	18570.1	49.62 PK	74	-24.38	-53.31	-53.85	4.92	-45.64
6	18570.1	37.91 AV	54	-16.09	-63.52	-68.29	4.92	-57.35
7	23706.6	49.19 PK	74	-24.81	-53.79	-54.21	4.92	-46.07
8	23706.6	38.83 AV	54	-15.17	-66.3	-63.03	4.92	-56.43
9	38602.22	46.06 PK	74	-27.94	-58.54	-56.07	4.92	-49.2
10	38602.22	35.5 AV	54	-18.5	-70.07	-66.16	4.92	-59.76

Note: Margin value = Emission Level - Limit value

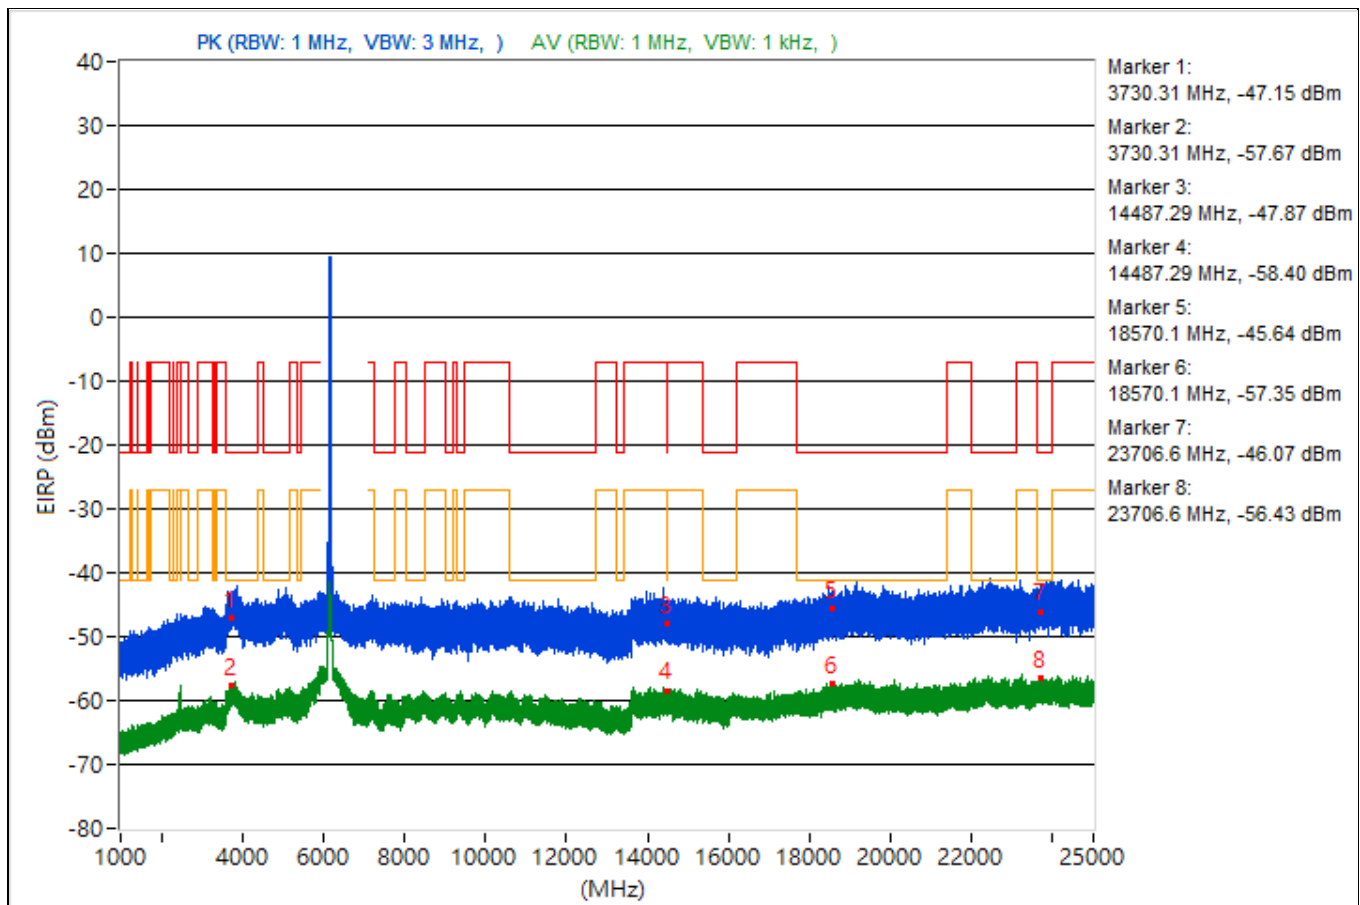


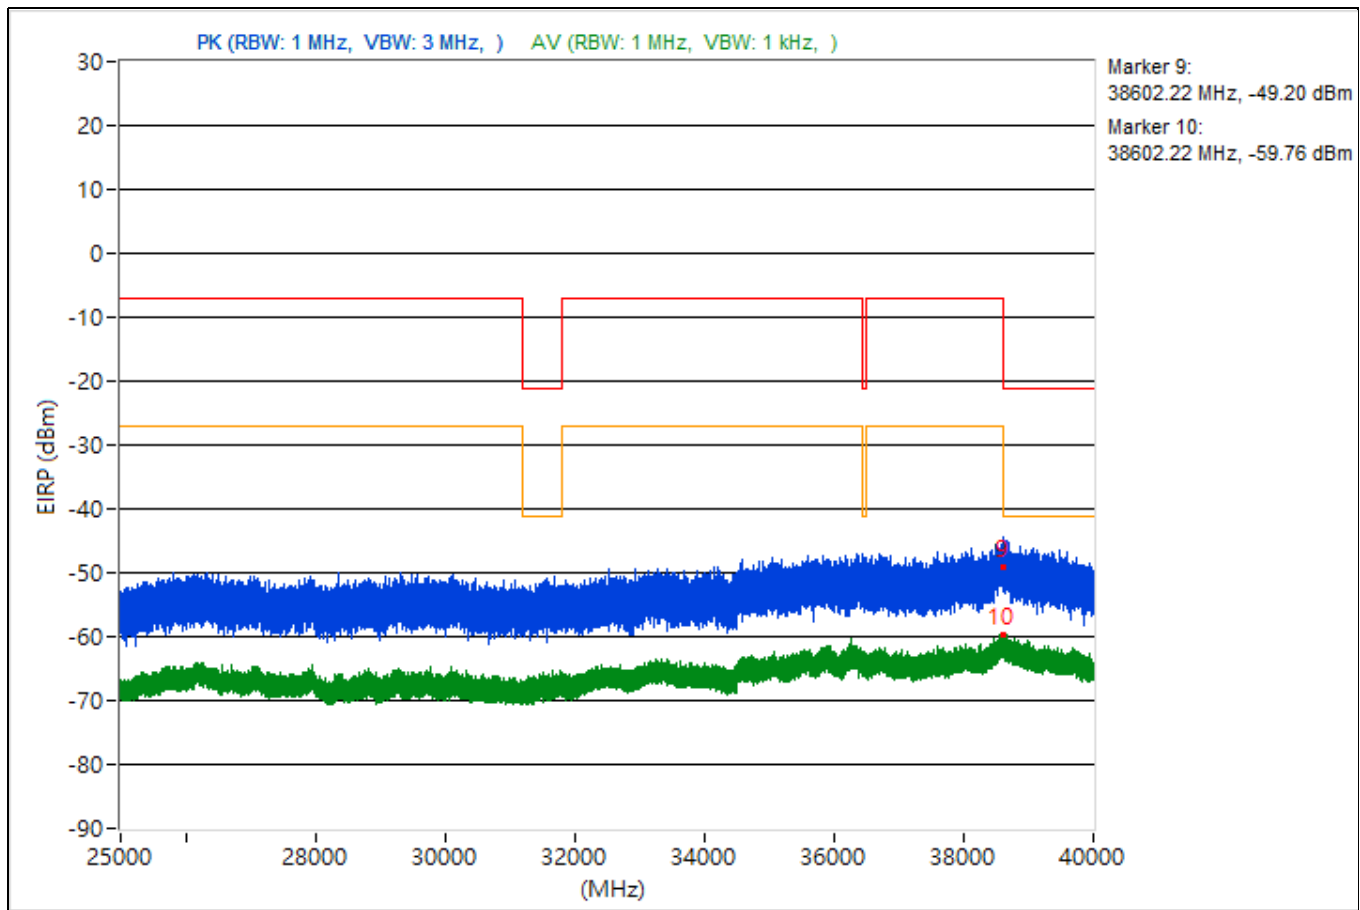


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.43	50.31 PK	74	-23.69	-55.27	-51.35	4.92	-44.95
2	3832.43	37.75 AV	54	-16.25	-63.97	-67.67	4.92	-57.51
3	15360.44	47.8 PK	74	-26.2	-55.41	-55.36	4.92	-47.46
4	15360.44	37.1 AV	54	-16.9	-66.94	-65.39	4.92	-58.16
5	19262.2	50.51 PK	74	-23.49	-52.63	-52.72	4.92	-44.75
6	19262.2	38.53 AV	54	-15.47	-66.11	-63.57	4.92	-56.73
7	22386.9	49.13 PK	74	-24.87	-53.97	-54.15	4.92	-46.13
8	22386.9	38.92 AV	54	-15.08	-66.88	-62.66	4.92	-56.34
9	38615.47	44.08 PK	74	-29.92	-59.12	-59.11	4.92	-51.18
10	38615.47	35.65 AV	54	-18.35	-66.5	-68.89	4.92	-59.61

Note: Margin value = Emission Level - Limit value

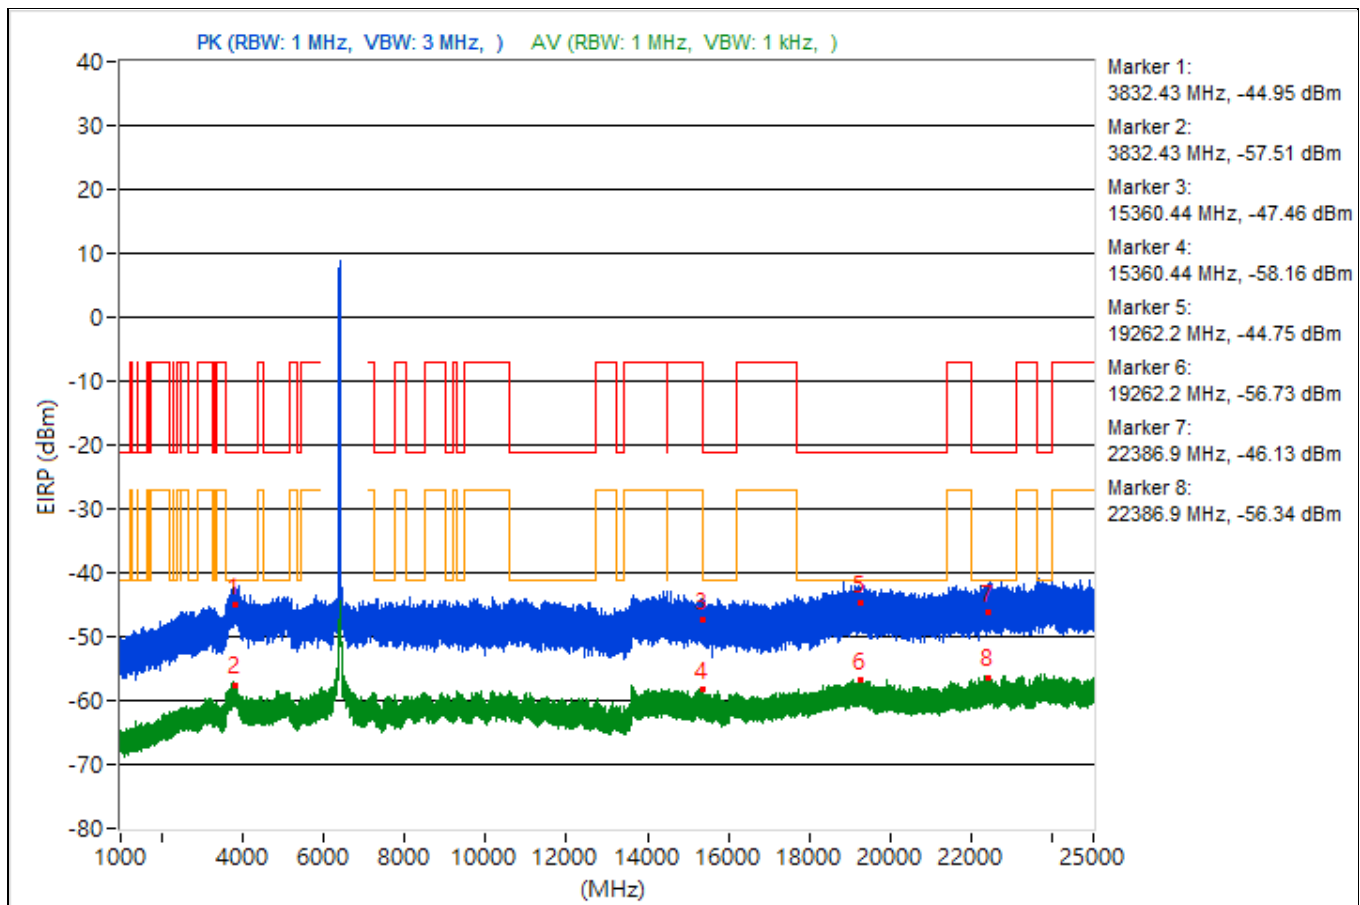


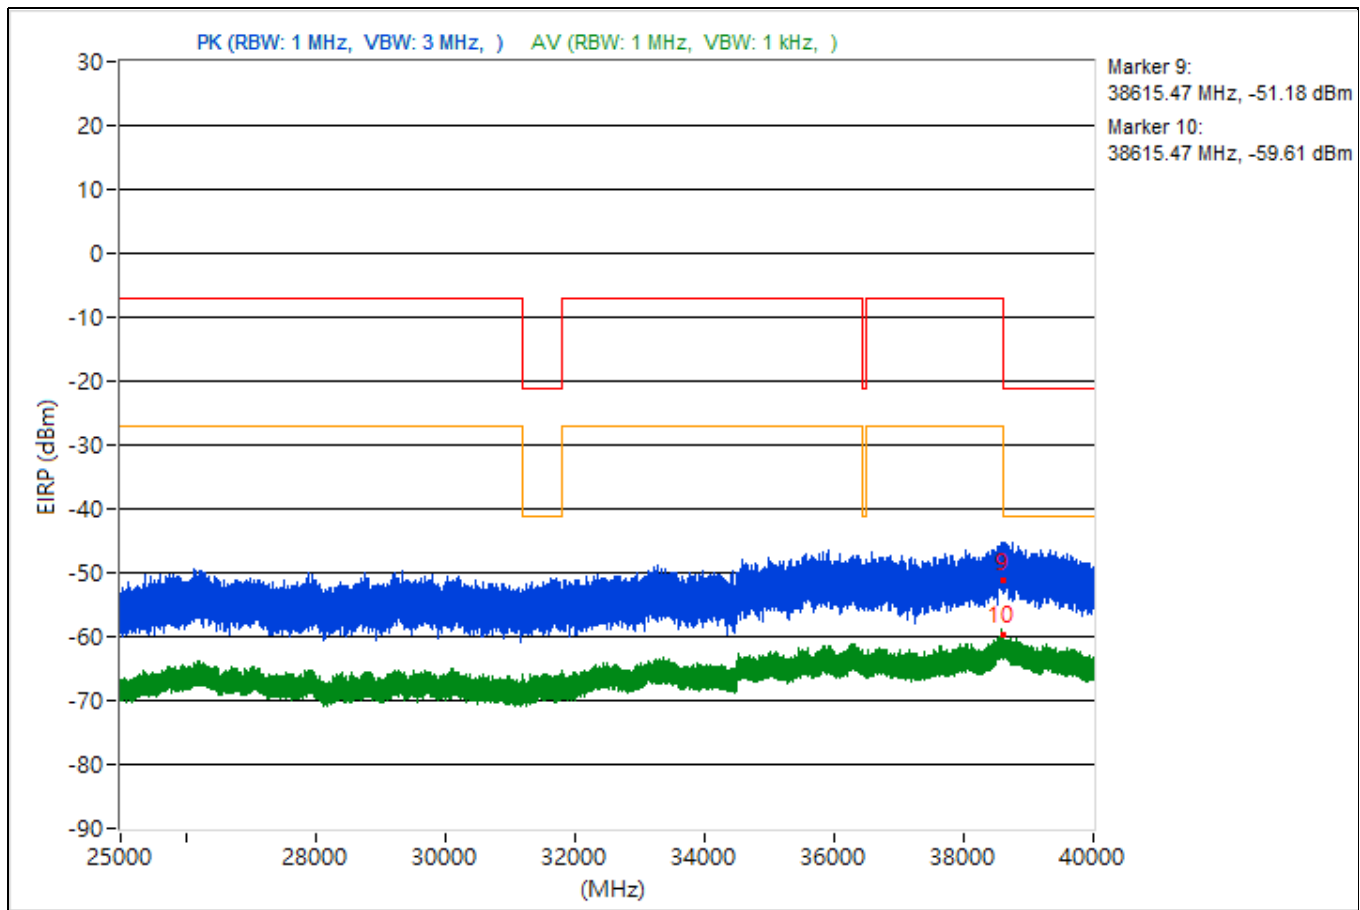


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3739.88	48.23 PK	74	-25.77	-54.69	-55.24	4.92	-47.03
2	3739.88	37.64 AV	54	-16.36	-67.62	-64.15	4.92	-57.62
3	14481.96	47.07 PK	74	-26.93	-57.11	-55.32	4.92	-48.19
4	14481.96	37.16 AV	54	-16.84	-65.47	-66.68	4.92	-58.1
5	19294.7	48.8 PK	74	-25.2	-54.14	-54.65	4.92	-46.46
6	19294.7	38.12 AV	54	-15.88	-63.91	-66.65	4.92	-57.14
7	23937.6	50.49 PK	74	-23.51	-50.91	-55.82	4.92	-44.77
8	23937.6	39.31 AV	54	-14.69	-64.66	-63.22	4.92	-55.95
9	38637.24	49.04 PK	74	-24.96	-53.3	-55.2	4.92	-46.22
10	38637.24	35.77 AV	54	-18.23	-66.34	-68.85	4.92	-59.49

Note: Margin value = Emission Level - Limit value

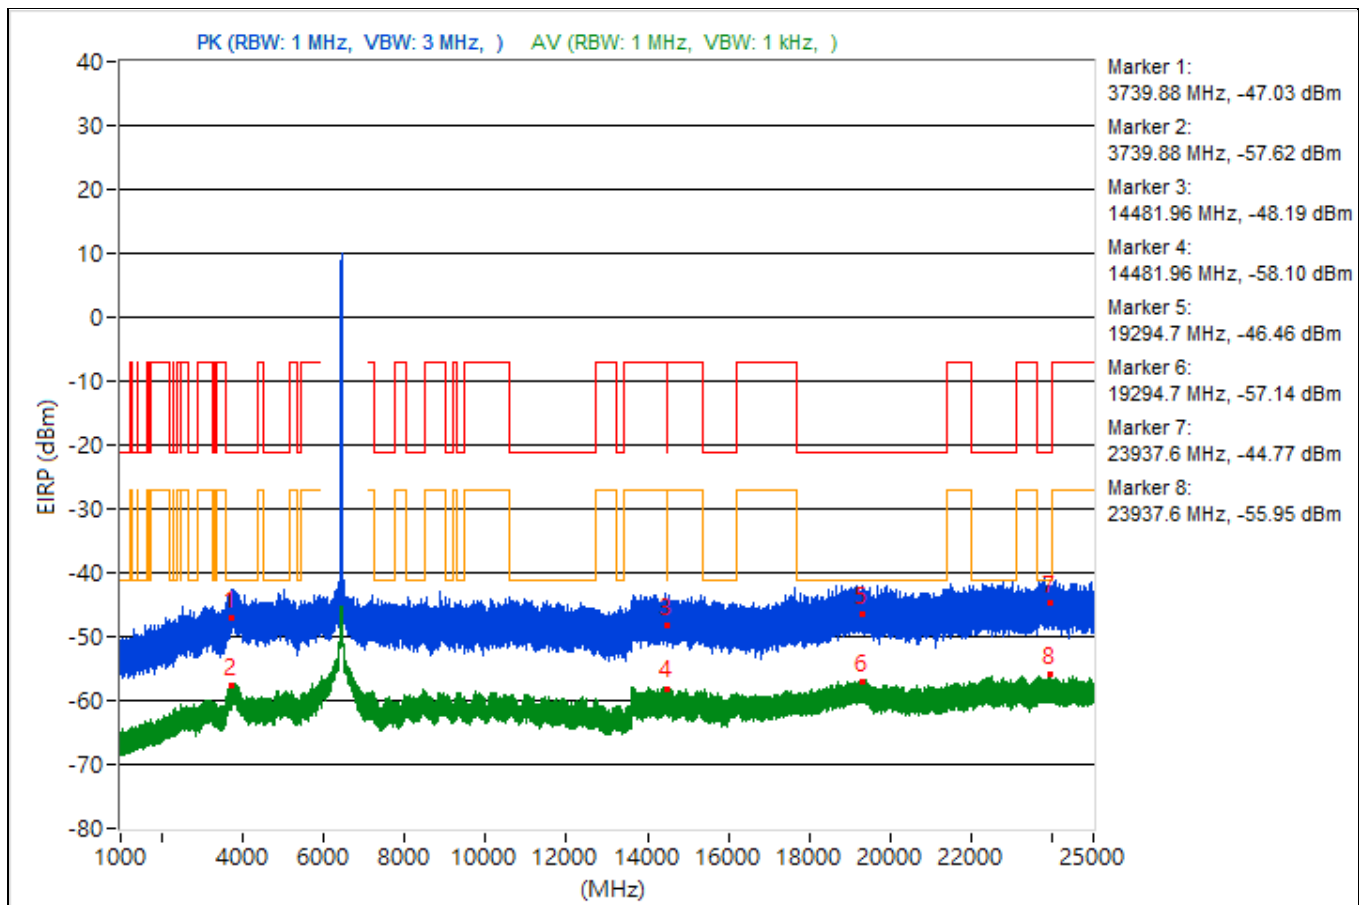


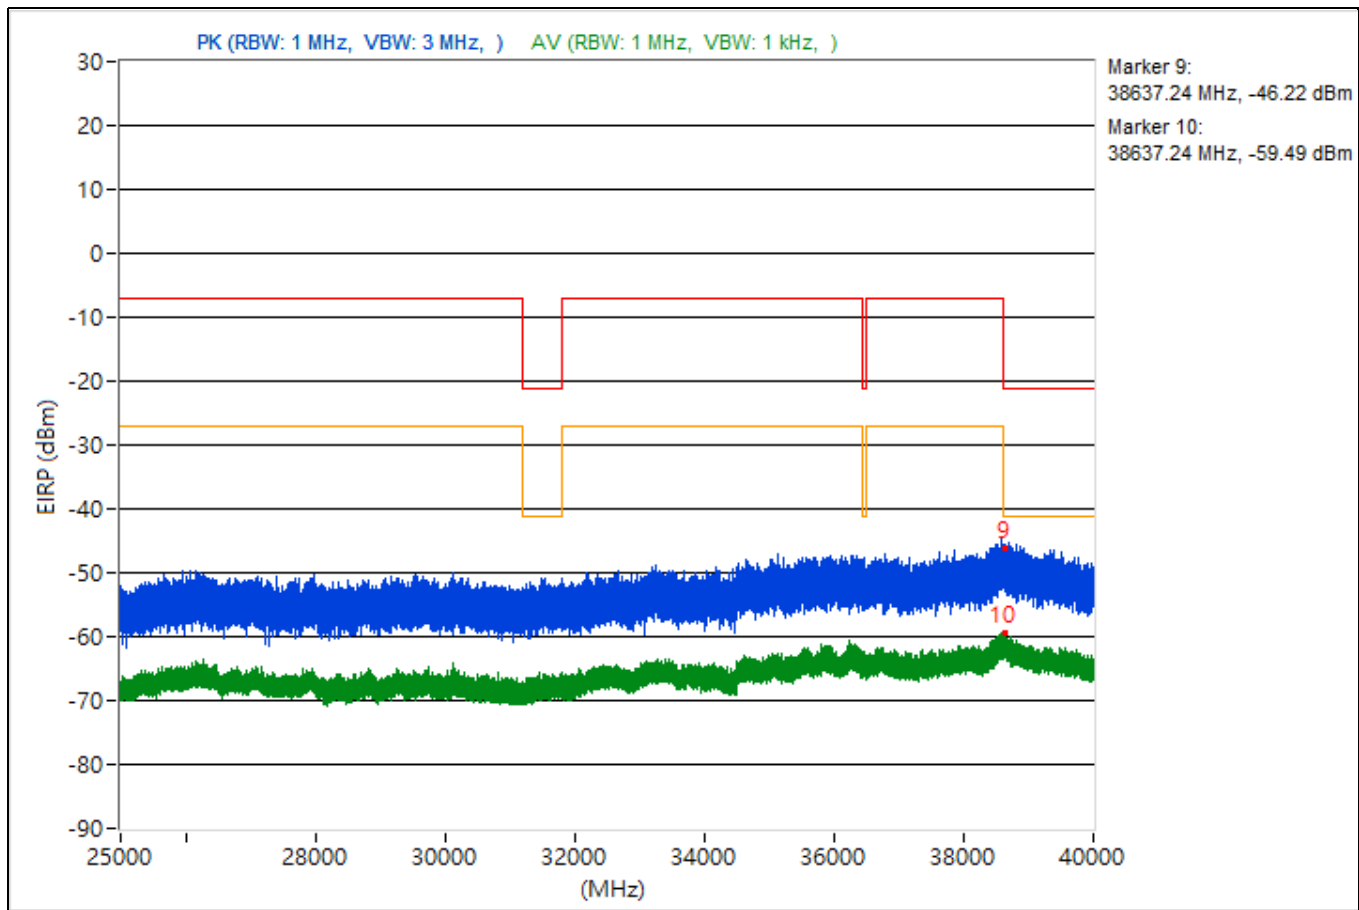


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.53	49.45 PK	74	-24.55	-54.36	-53.19	4.92	-45.81
2	3813.53	38.17 AV	54	-15.83	-63.77	-66.79	4.92	-57.09
3	9332.8	48.32 PK	74	-25.68	-54.13	-55.77	4.92	-46.94
4	9332.8	36.33 AV	54	-17.67	-65.65	-68.55	4.92	-58.93
5	19351.8	48.08 PK	74	-25.92	-56.6	-54	4.92	-47.18
6	19351.8	38.31 AV	54	-15.69	-67.09	-63.43	4.92	-56.95
7	22436.8	51.65 PK	74	-22.35	-52.32	-50.87	4.92	-43.61
8	22436.8	39.03 AV	54	-14.97	-62.52	-66.84	4.92	-56.23
9	38616.89	48.1 PK	74	-25.9	-56.85	-53.84	4.92	-47.16
10	38616.89	35.55 AV	54	-18.45	-69.9	-66.16	4.92	-59.71

Note: Margin value = Emission Level - Limit value

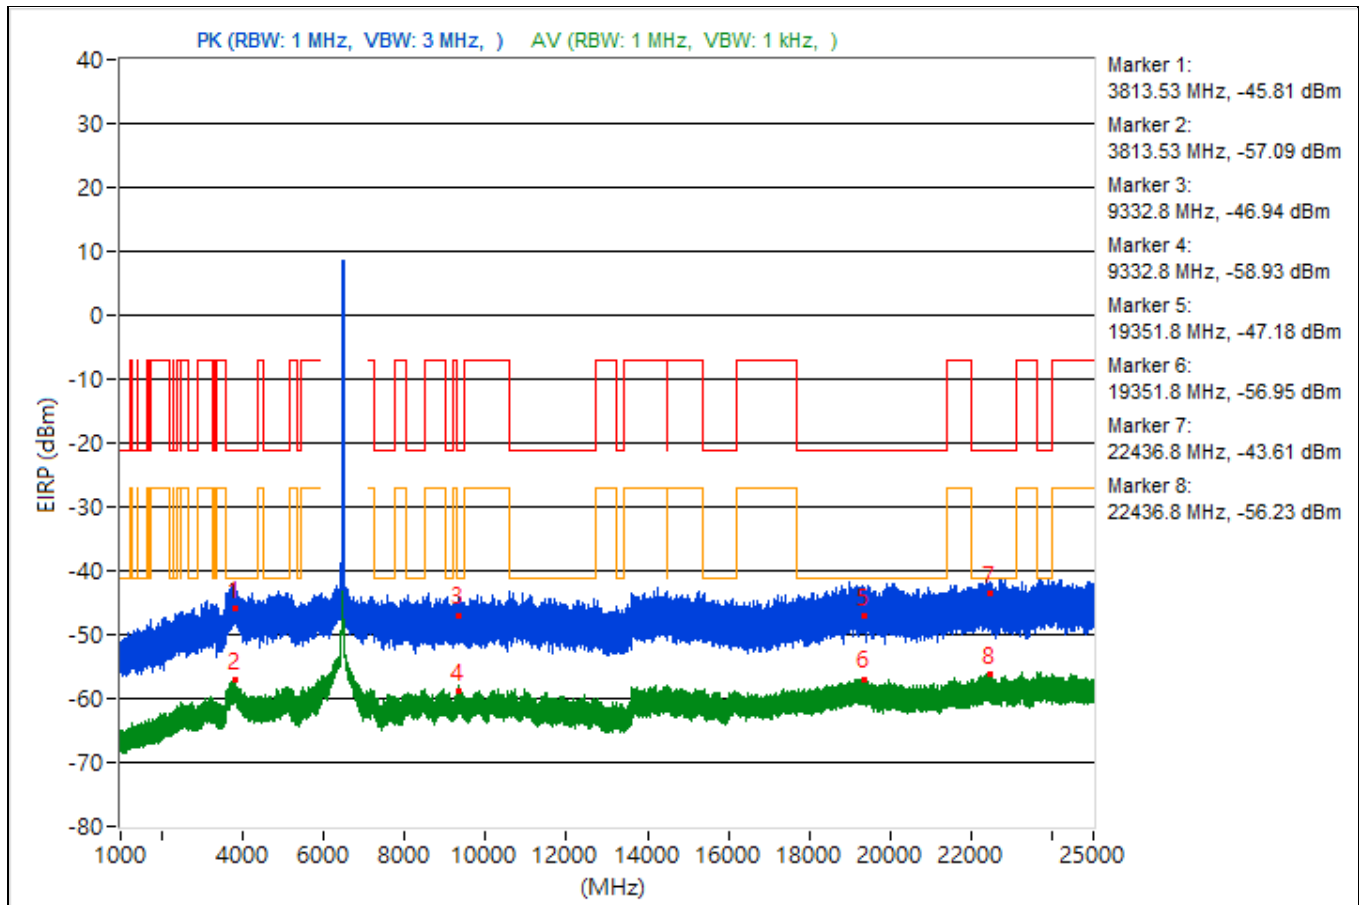


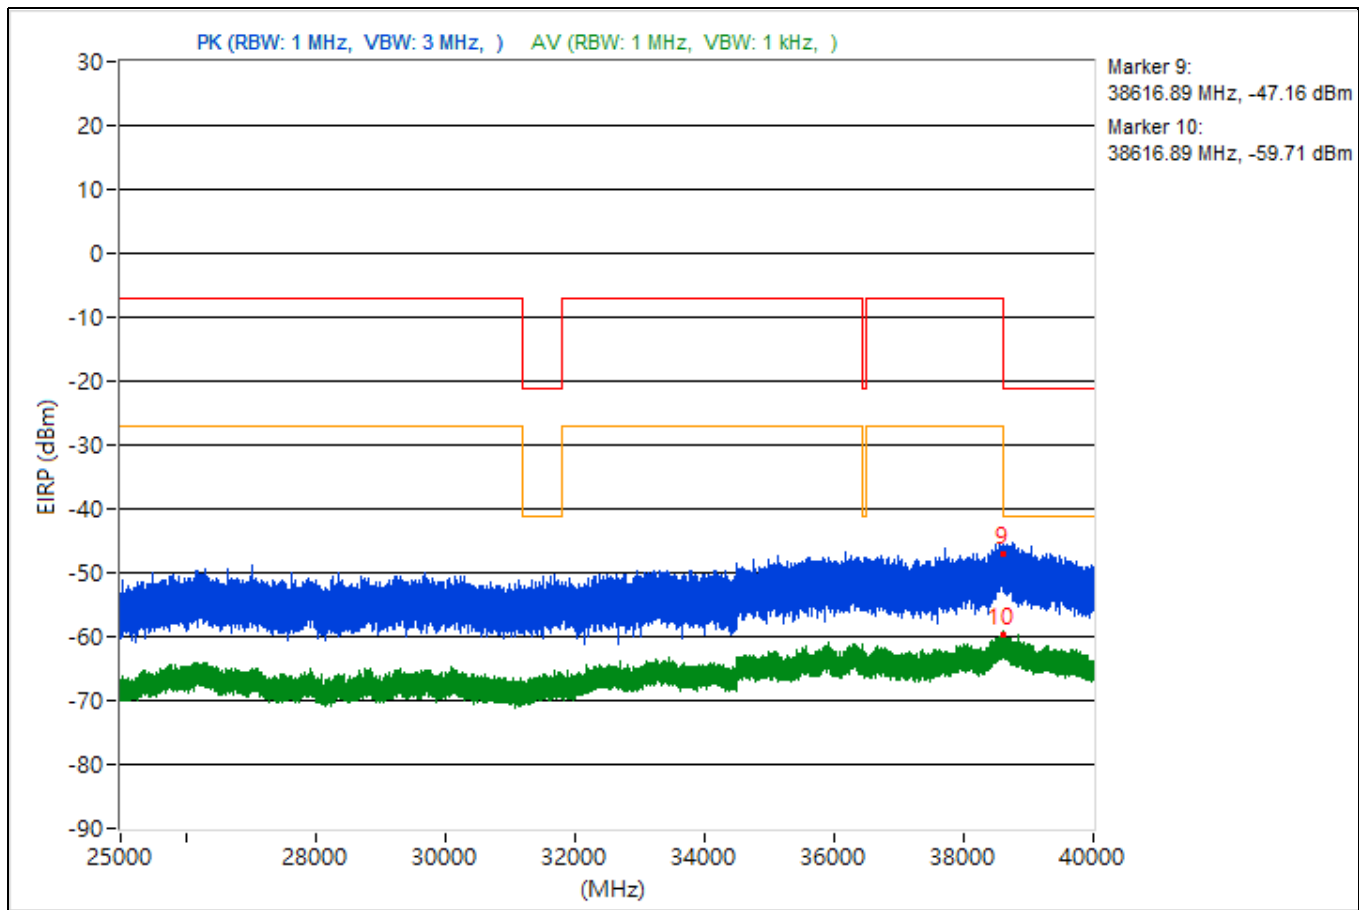


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.27	50.96 PK	74	-23.04	-51.72	-52.8	4.92	-44.3
2	3775.27	37.93 AV	54	-16.07	-66.32	-64.41	4.92	-57.33
3	14471.38	47.69 PK	74	-26.31	-53.88	-58.14	4.92	-47.57
4	14471.38	36.79 AV	54	-17.21	-68.46	-65.01	4.92	-58.47
5	19236.3	48.44 PK	74	-25.56	-53.37	-56.79	4.92	-46.82
6	19236.3	39.05 AV	54	-14.95	-63.46	-64.95	4.92	-56.21
7	22383.3	47.52 PK	74	-26.48	-55.86	-55.5	4.92	-47.74
8	22383.3	40.18 AV	54	-13.82	-62.32	-63.83	4.92	-55.08
9	38610.67	46.28 PK	74	-27.72	-56.76	-57.06	4.92	-48.98
10	38610.67	36.1 AV	54	-17.9	-65.23	-70.44	4.92	-59.16

Note: Margin value = Emission Level - Limit value

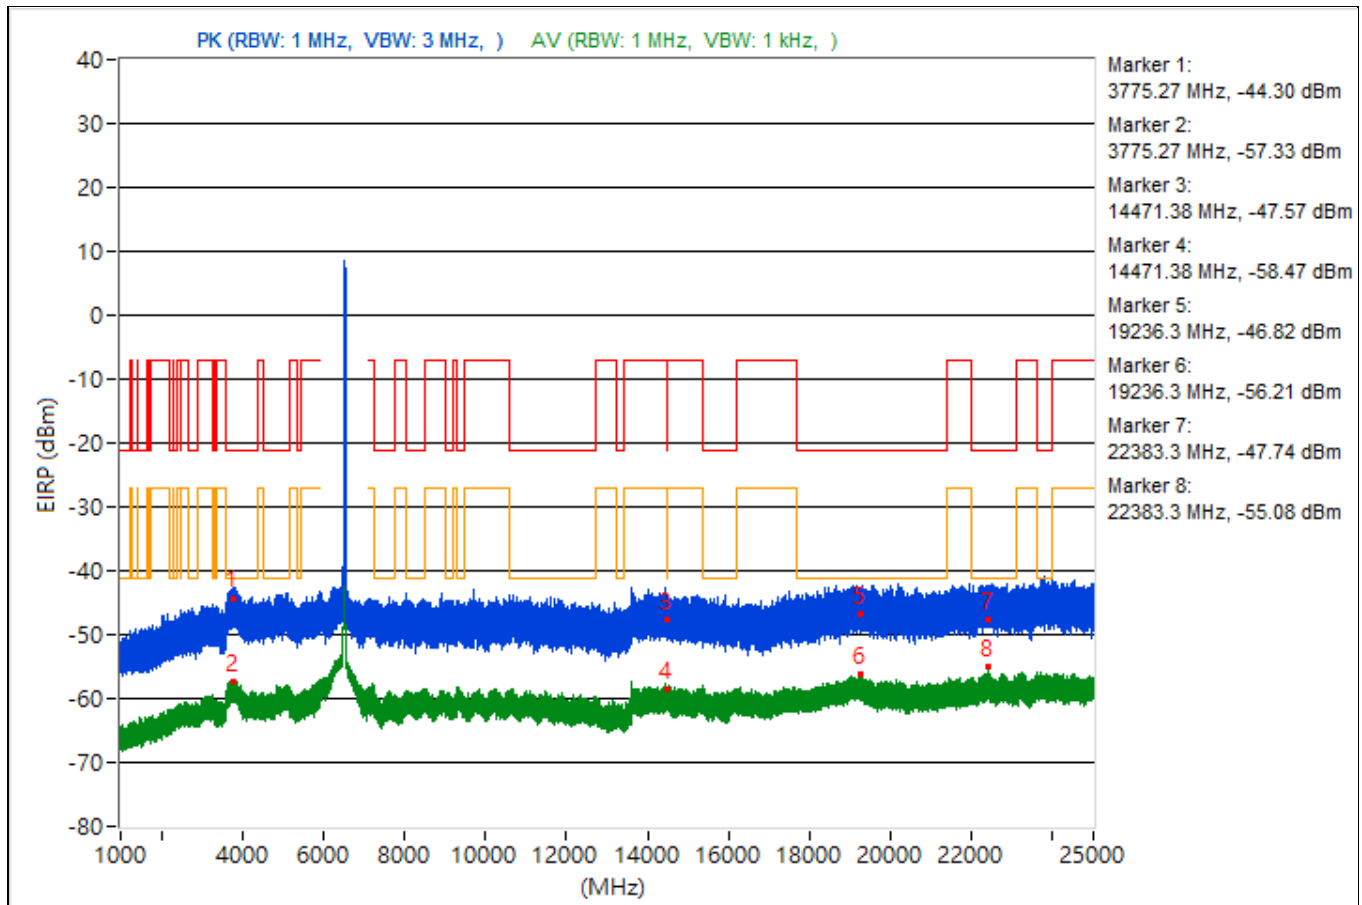


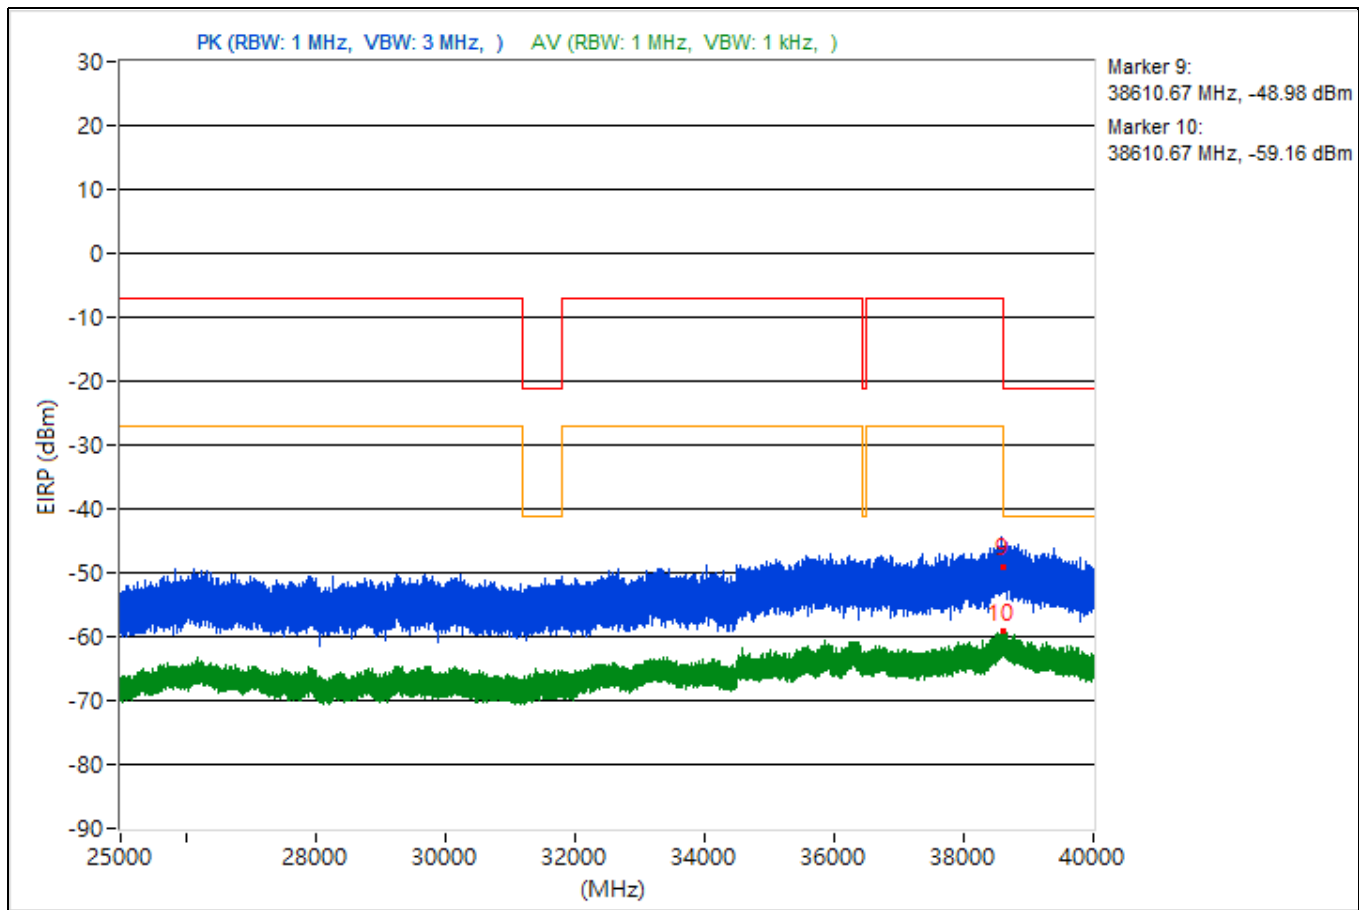


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3854.83	47.56 PK	74	-26.44	-55.94	-55.34	4.92	-47.7
2	3854.83	37.55 AV	54	-16.45	-63.81	-68.86	4.92	-57.71
3	8462.22	49.06 PK	74	-24.94	-53.97	-54.29	4.92	-46.2
4	8462.22	35.77 AV	54	-18.23	-69.01	-66.27	4.92	-59.49
5	19028.6	48.3 PK	74	-25.7	-55.67	-54.24	4.92	-46.96
6	19028.6	37.64 AV	54	-16.36	-67.05	-64.44	4.92	-57.62
7	23608.9	49.29 PK	74	-24.71	-54.63	-53.28	4.92	-45.97
8	23608.9	38.43 AV	54	-15.57	-63.17	-67.31	4.92	-56.83
9	38618.76	45.02 PK	74	-28.98	-56.75	-60.32	4.92	-50.24
10	38618.76	34.76 AV	54	-19.24	-70.23	-67.16	4.92	-60.5

Note: Margin value = Emission Level - Limit value

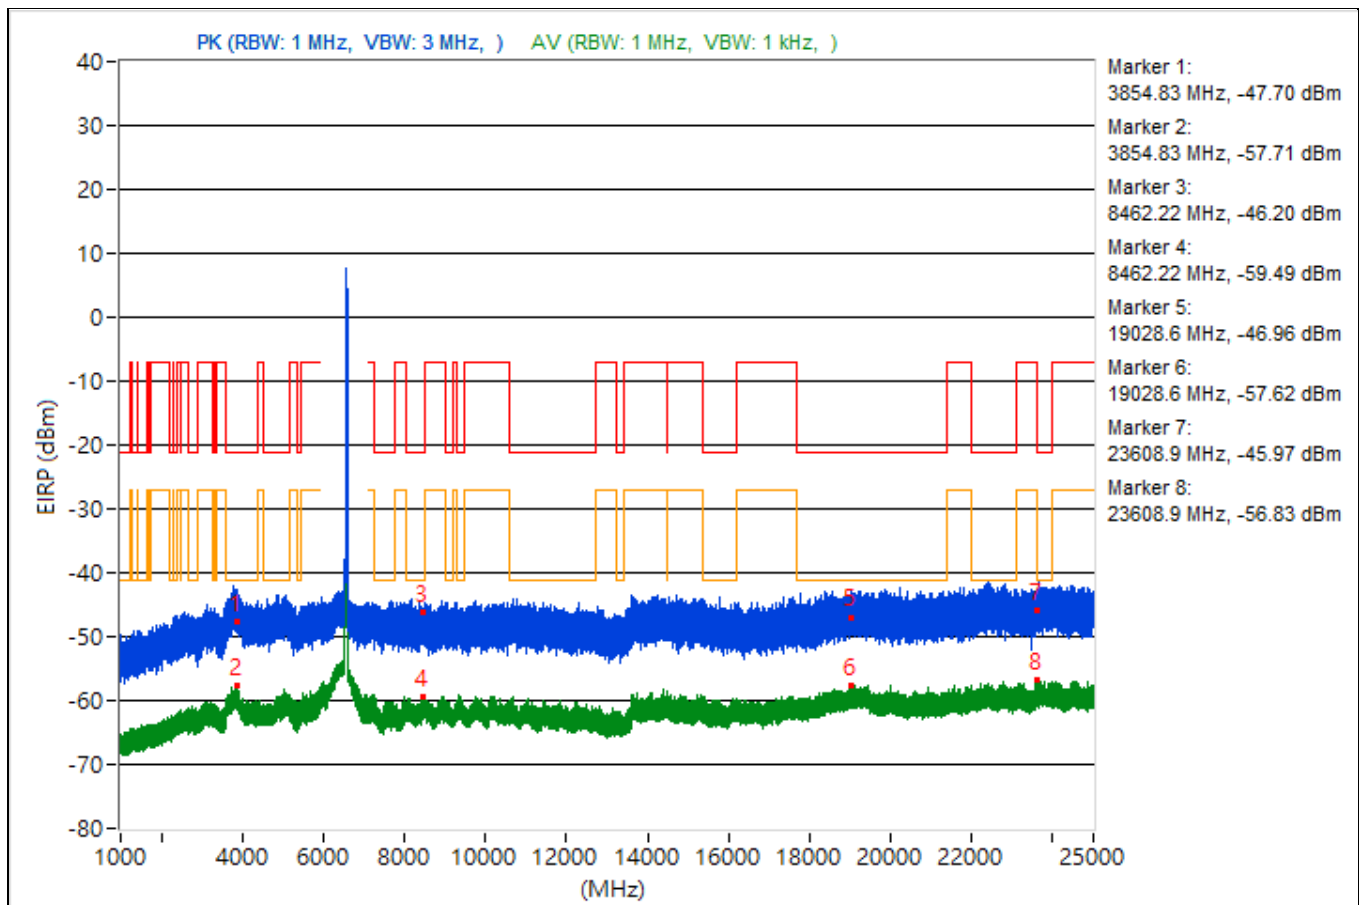


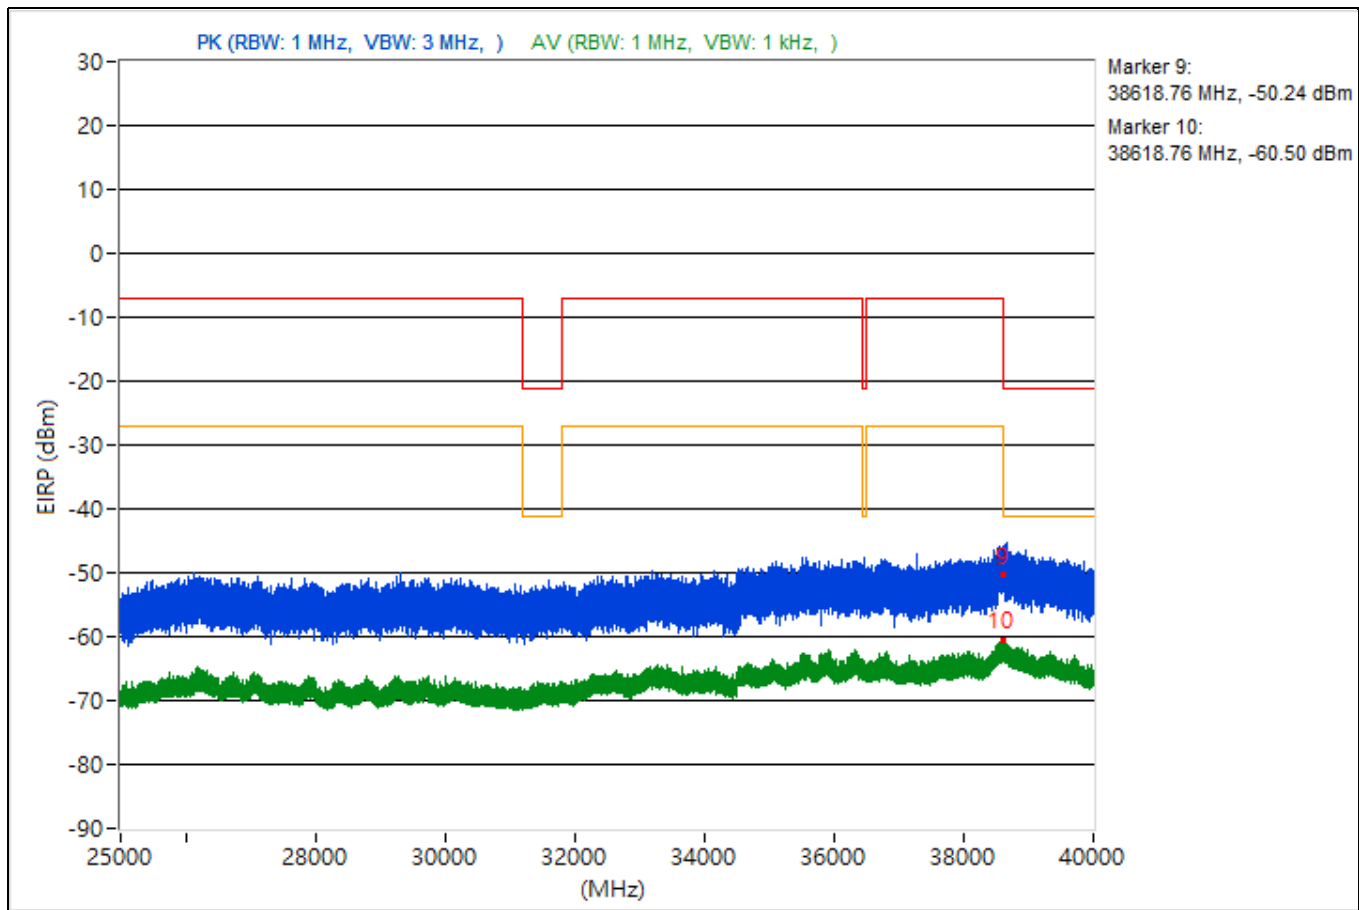


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3739.41	50.17 PK	74	-23.83	-54.1	-52.16	4.92	-45.09
2	3739.41	37.24 AV	54	-16.76	-65.17	-66.92	4.92	-58.02
3	15366.13	48.91 PK	74	-25.09	-54.75	-53.86	4.92	-46.35
4	15366.13	36.11 AV	54	-17.89	-69.52	-65.53	4.92	-59.15
5	19384.8	47.64 PK	74	-26.36	-56.04	-55.11	4.92	-47.62
6	19384.8	37.7 AV	54	-16.3	-64.29	-67.14	4.92	-57.56
7	23982.8	51.41 PK	74	-22.59	-51.77	-51.79	4.92	-43.85
8	23982.8	38.19 AV	54	-15.81	-67.25	-63.53	4.92	-57.07
9	38613.42	46.22 PK	74	-27.78	-55.27	-59.8	4.92	-49.04
10	38613.42	34.83 AV	54	-19.17	-70.23	-67.05	4.92	-60.43

Note: Margin value = Emission Level - Limit value

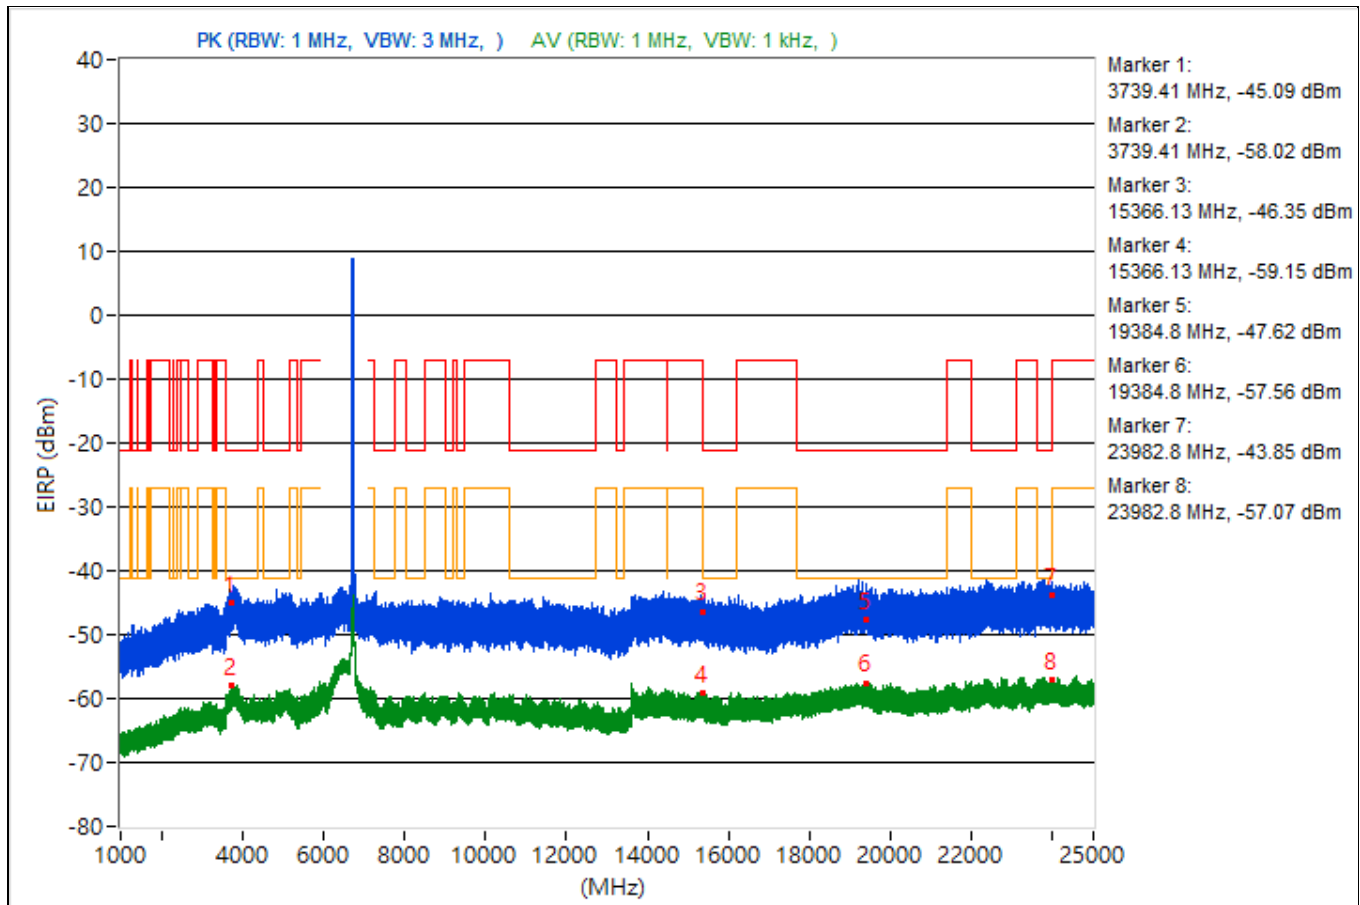


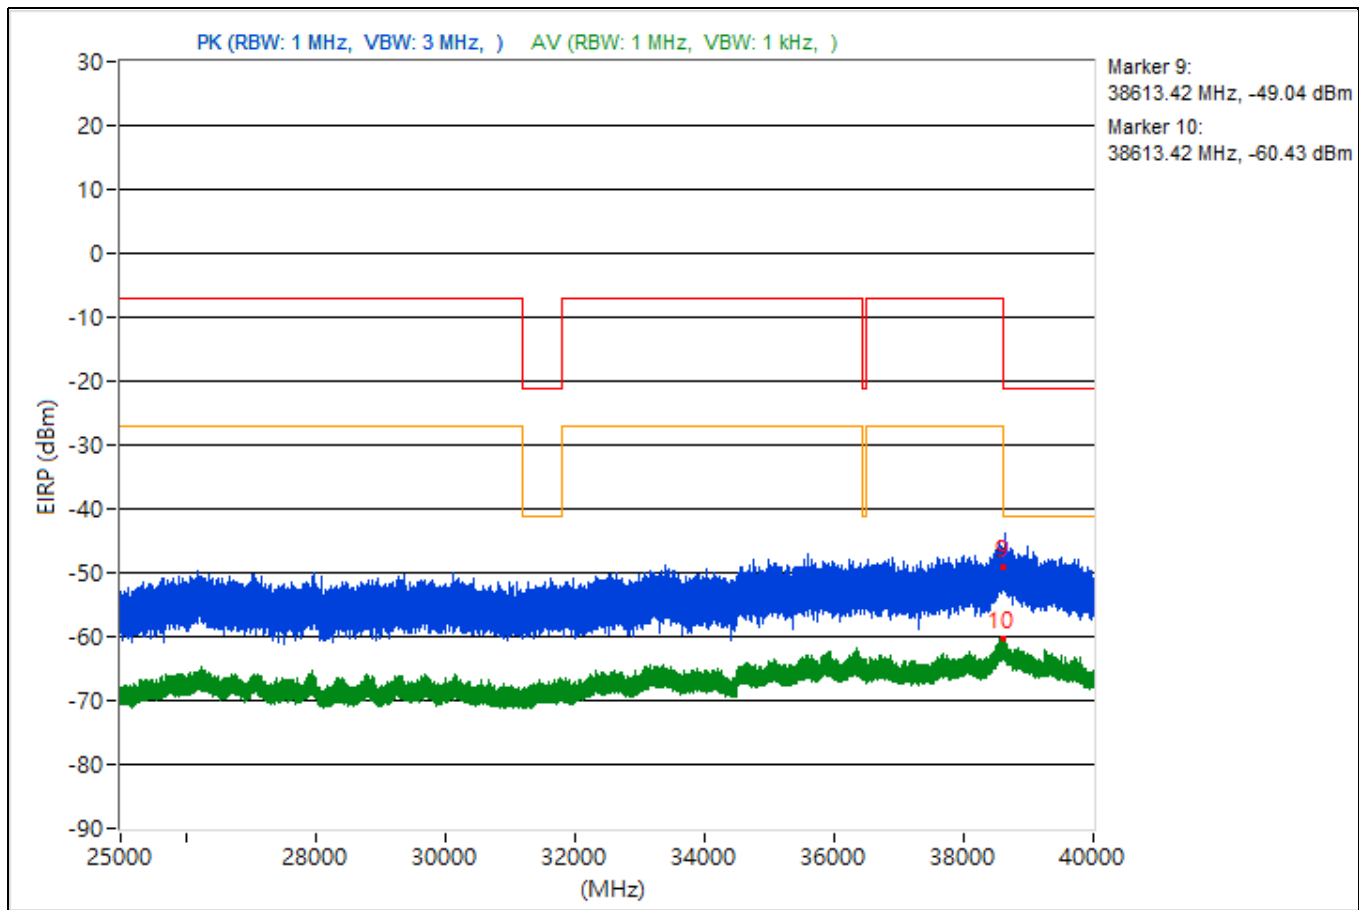


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.59	49.22 PK	74	-24.78	-55.99	-52.6	4.92	-46.04
2	3804.59	37.36 AV	54	-16.64	-64.33	-68.15	4.92	-57.9
3	14487.47	47.03 PK	74	-26.97	-56.99	-55.46	4.92	-48.23
4	14487.47	37.62 AV	54	-16.38	-65.12	-66.07	4.92	-57.64
5	19085.9	48.01 PK	74	-25.99	-55.25	-55.11	4.92	-47.25
6	19085.9	37.28 AV	54	-16.72	-64.58	-67.84	4.92	-57.98
7	22767.1	49.44 PK	74	-24.56	-54.4	-53.19	4.92	-45.82
8	22767.1	38.62 AV	54	-15.38	-63.39	-66.19	4.92	-56.64
9	38610.04	47.35 PK	74	-26.65	-54.05	-58.91	4.92	-47.91
10	38610.04	35.18 AV	54	-18.82	-67.34	-68.79	4.92	-60.08

Note: Margin value = Emission Level - Limit value

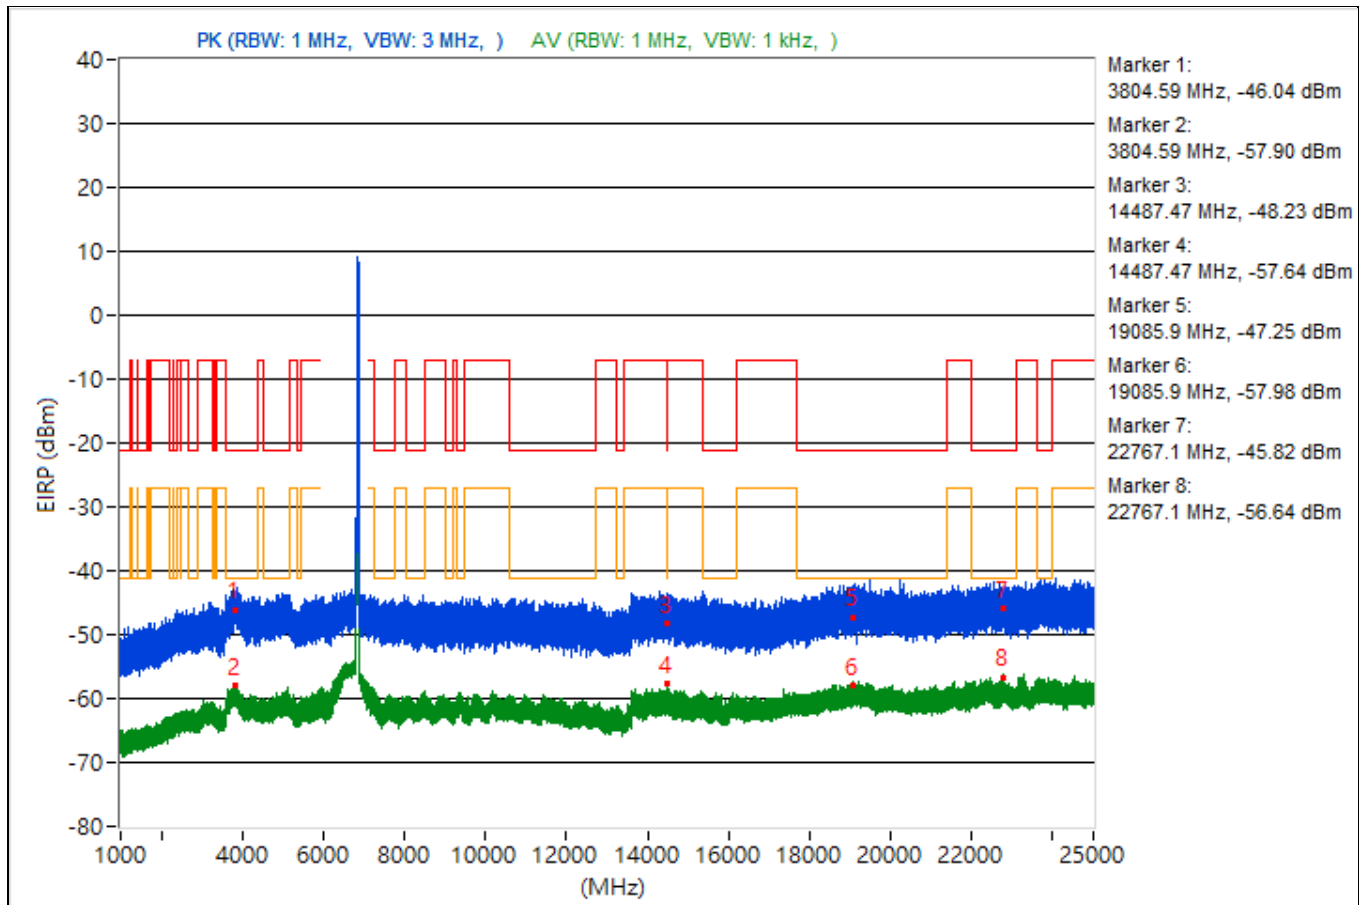


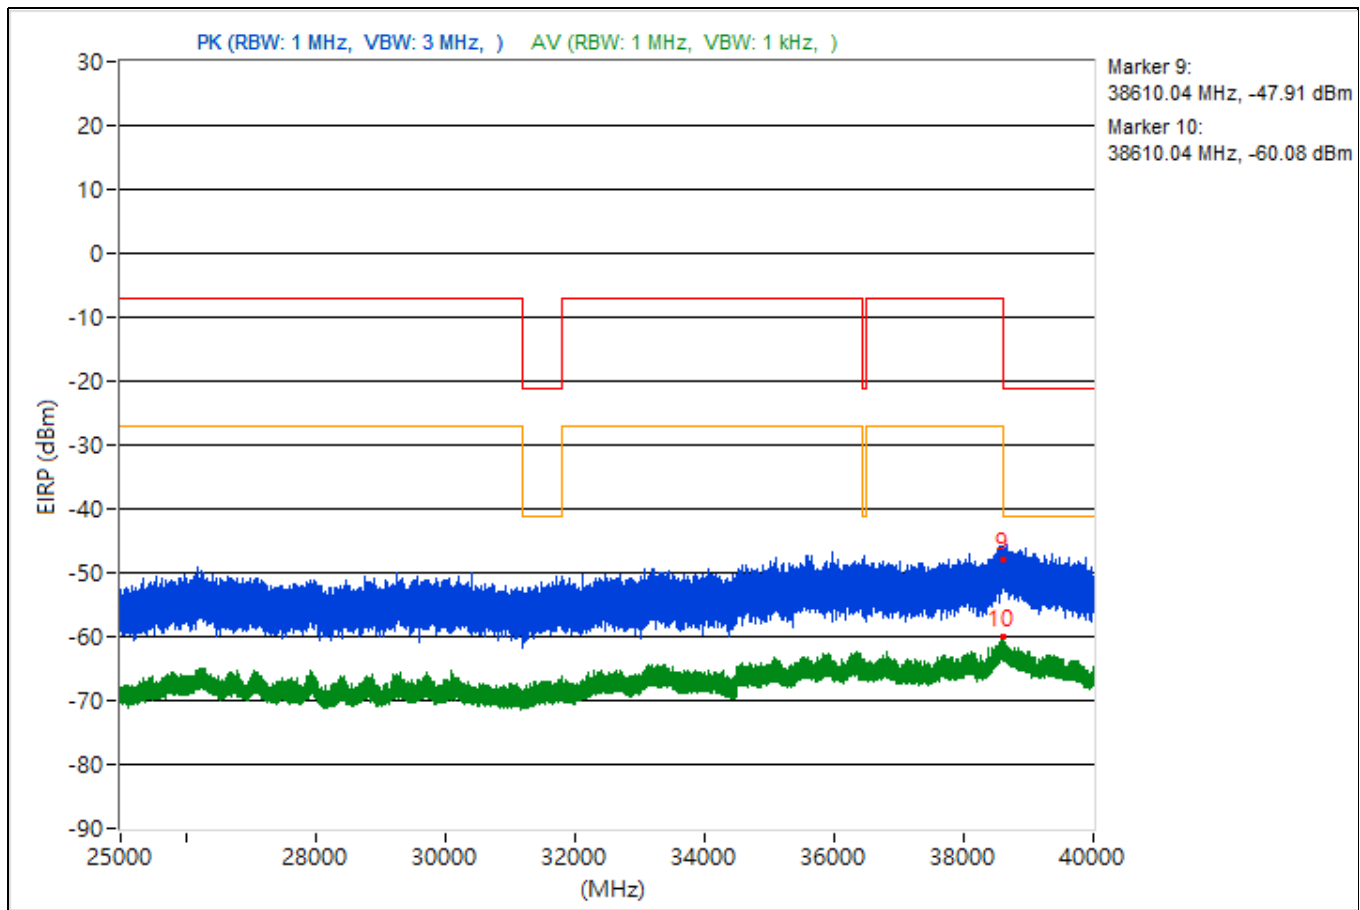


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.64	48.83 PK	74	-25.17	-56.02	-53.16	4.92	-46.43
2	3802.64	37.55 AV	54	-16.45	-64.07	-68.14	4.92	-57.71
3	14485.33	49.93 PK	74	-24.07	-53.82	-52.77	4.92	-45.33
4	14485.33	36.88 AV	54	-17.12	-68.91	-64.7	4.92	-58.38
5	19461.6	46.66 PK	74	-27.34	-57.31	-55.87	4.92	-48.6
6	19461.6	38.72 AV	54	-15.28	-62.7	-67.54	4.92	-56.54
7	23987.8	52.34 PK	74	-21.66	-51.57	-50.24	4.92	-42.92
8	23987.8	38.52 AV	54	-15.48	-63.2	-66.9	4.92	-56.74
9	38648.36	45.48 PK	74	-28.52	-56.62	-59.17	4.92	-49.78
10	38648.36	34.66 AV	54	-19.34	-70.14	-67.36	4.92	-60.6

Note: Margin value = Emission Level - Limit value

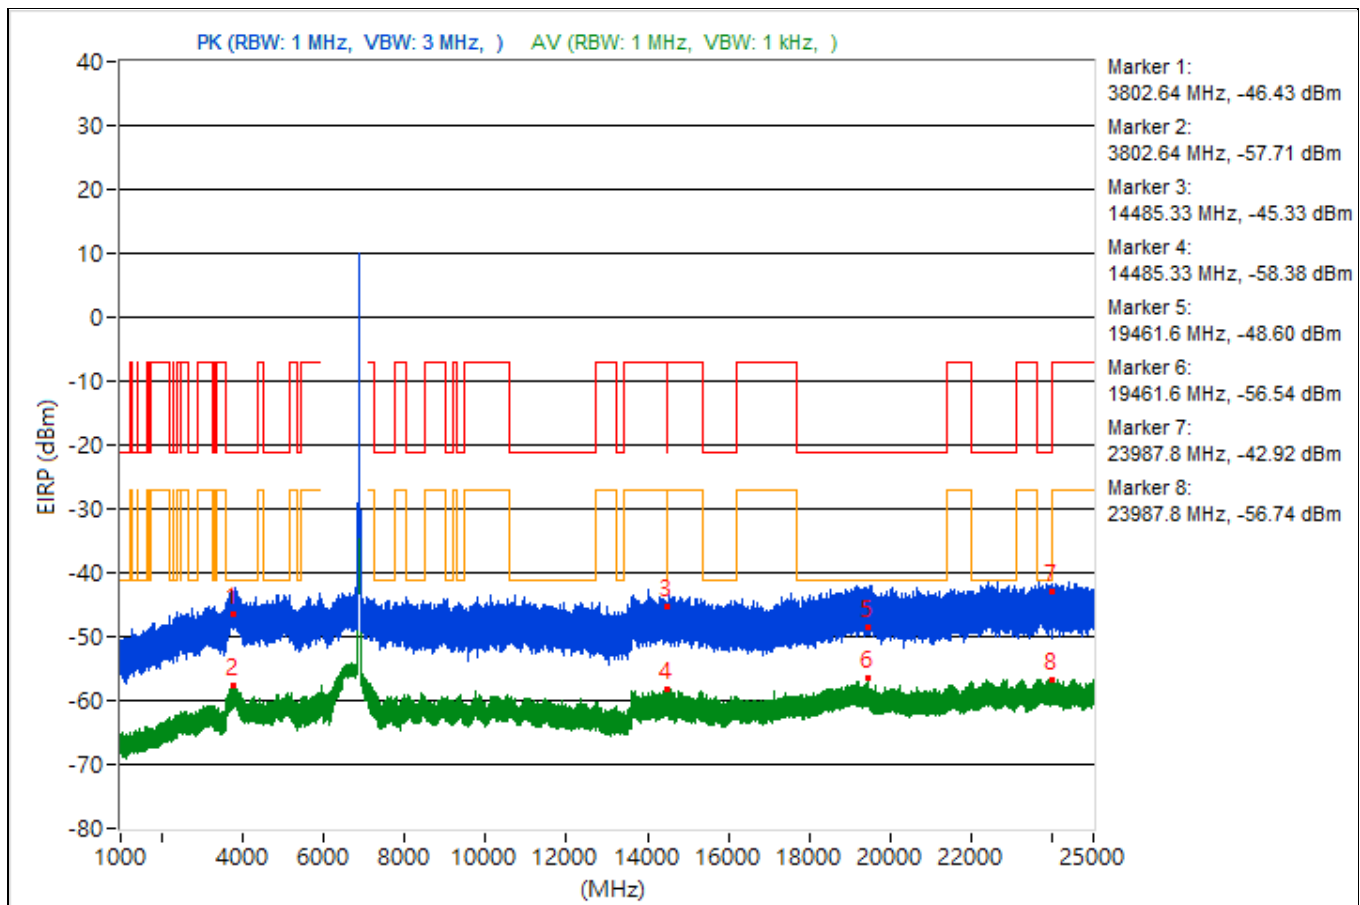


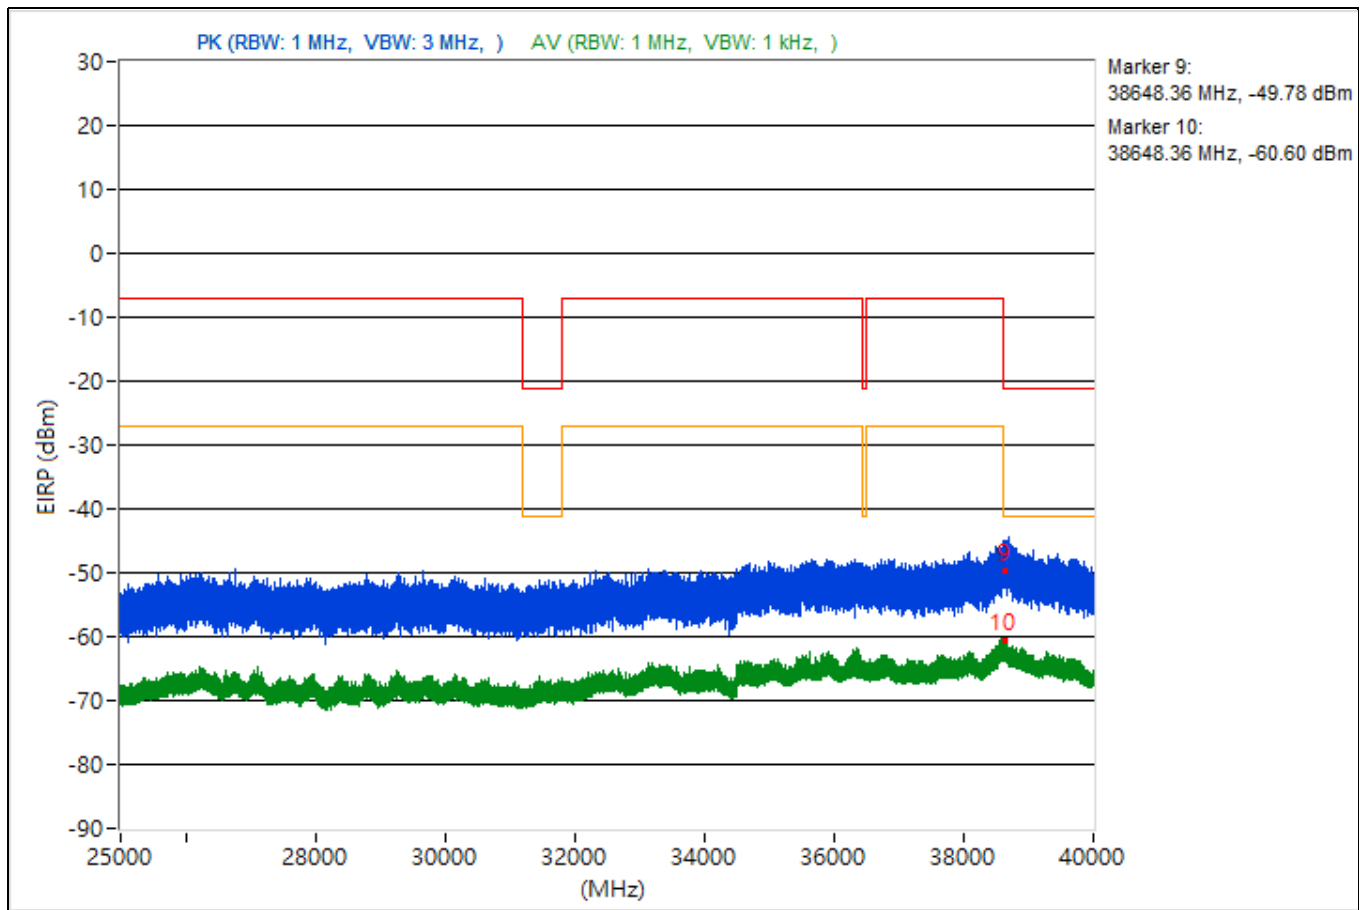


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.67	49.31 PK	74	-24.69	-53.66	-54.11	4.92	-45.95
2	3818.67	37.41 AV	54	-16.59	-64.86	-66.96	4.92	-57.85
3	7268.19	44.73 PK	74	-29.27	-57.6	-59.53	4.92	-50.53
4	7268.19	37.21 AV	54	-16.79	-66.97	-65.17	4.92	-58.05
5	19027	48.99 PK	74	-25.01	-55.28	-53.34	4.92	-46.27
6	19027	37.72 AV	54	-16.28	-68.08	-63.86	4.92	-57.54
7	23841	49.42 PK	74	-24.58	-55.71	-52.43	4.92	-45.84
8	23841	38.23 AV	54	-15.77	-66.96	-63.59	4.92	-57.03
9	38608.27	45.2 PK	74	-28.8	-57.19	-58.96	4.92	-50.06
10	38608.27	34.93 AV	54	-19.07	-67.38	-69.35	4.92	-60.33

Note: Margin value = Emission Level - Limit value

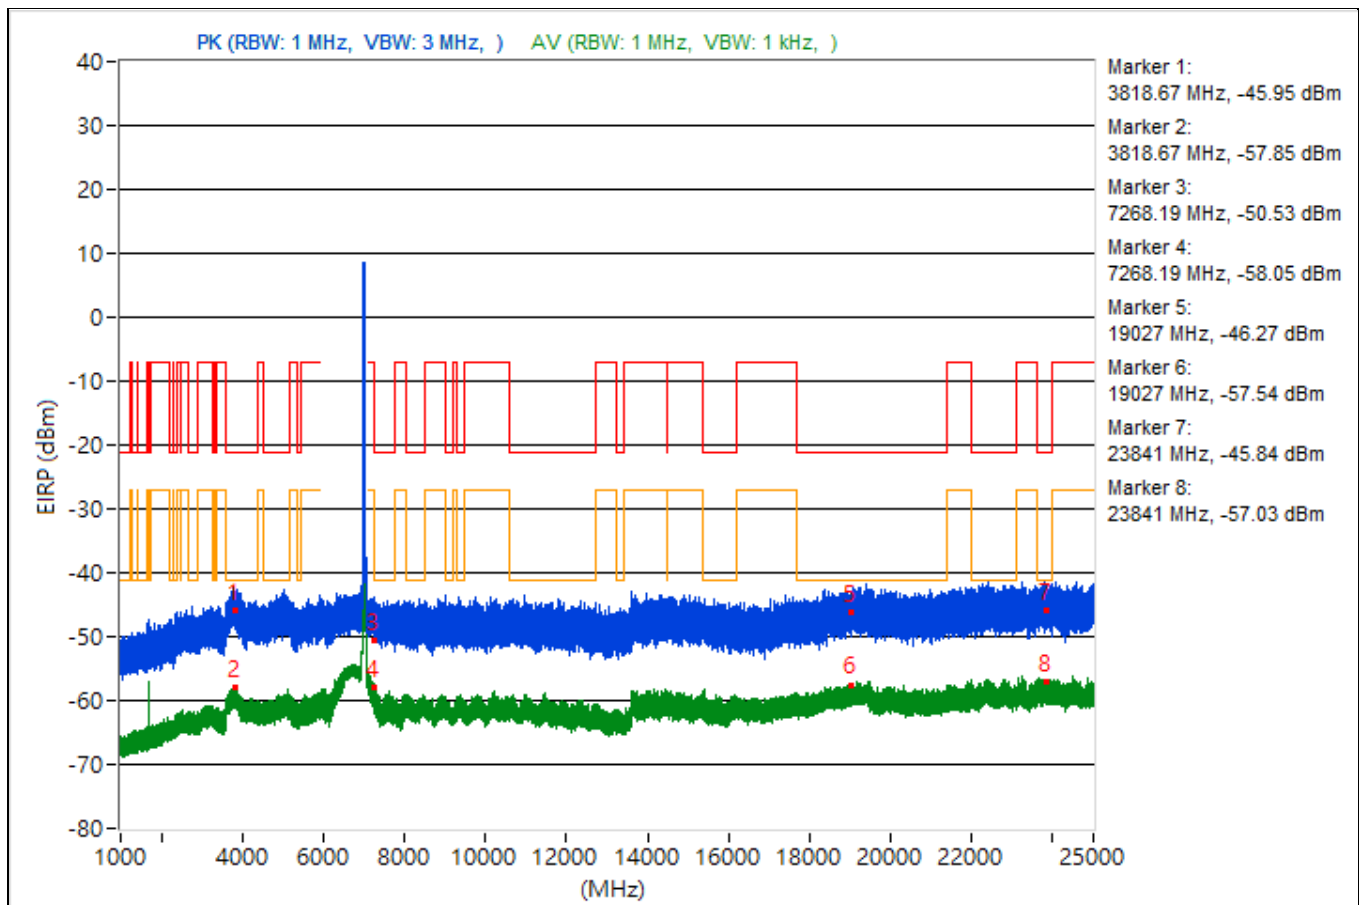


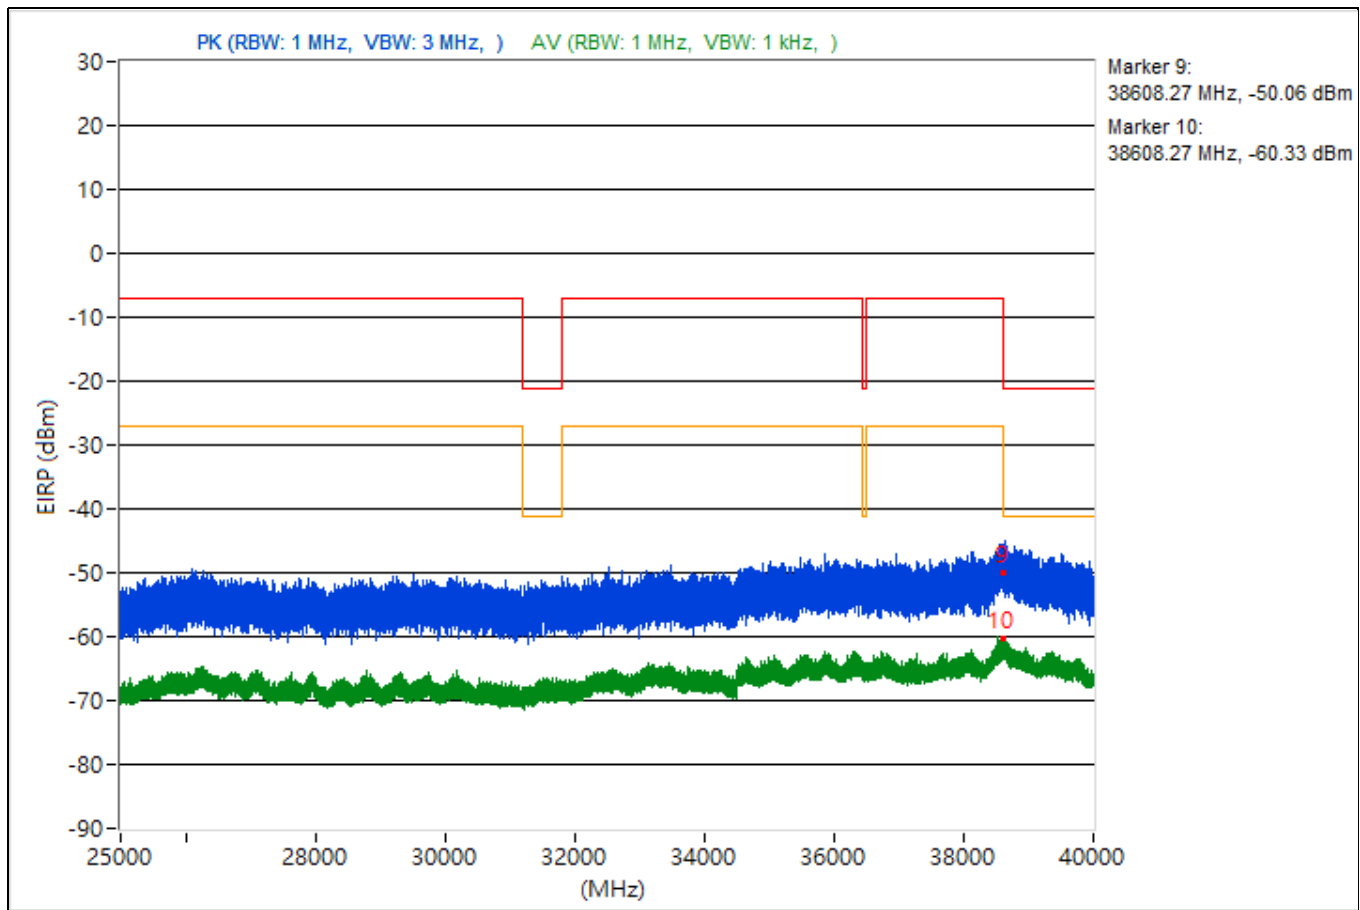


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3837.33	47.2 PK	74	-26.8	-56.35	-55.65	4.92	-48.06
2	3837.33	37.91 AV	54	-16.09	-64.31	-66.53	4.92	-57.35
3	14490.67	48.27 PK	74	-25.73	-53.88	-56.28	4.92	-46.99
4	14490.67	37.83 AV	54	-16.17	-66	-64.81	4.92	-57.43
5	19405	47.07 PK	74	-26.93	-56.58	-55.69	4.92	-48.19
6	19405	38.28 AV	54	-15.72	-66.63	-63.69	4.92	-56.98
7	23802	50.81 PK	74	-23.19	-53.67	-51.39	4.92	-44.45
8	23802	39.04 AV	54	-14.96	-65.79	-62.96	4.92	-56.22
9	38621.42	46.64 PK	74	-27.36	-57.33	-55.88	4.92	-48.62
10	38621.42	34.32 AV	54	-19.68	-71.64	-67.19	4.92	-60.94

Note: Margin value = Emission Level - Limit value

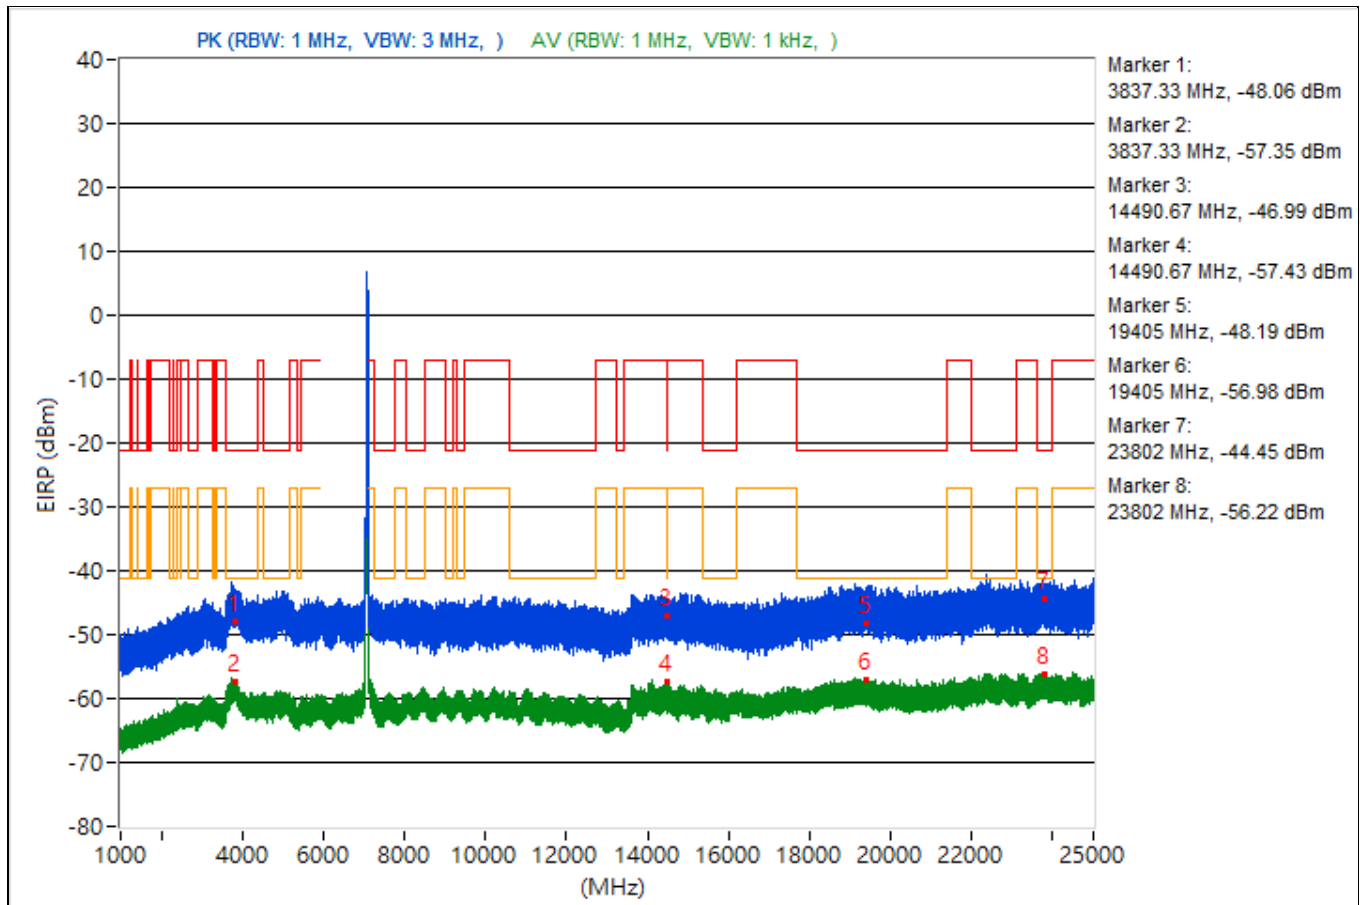


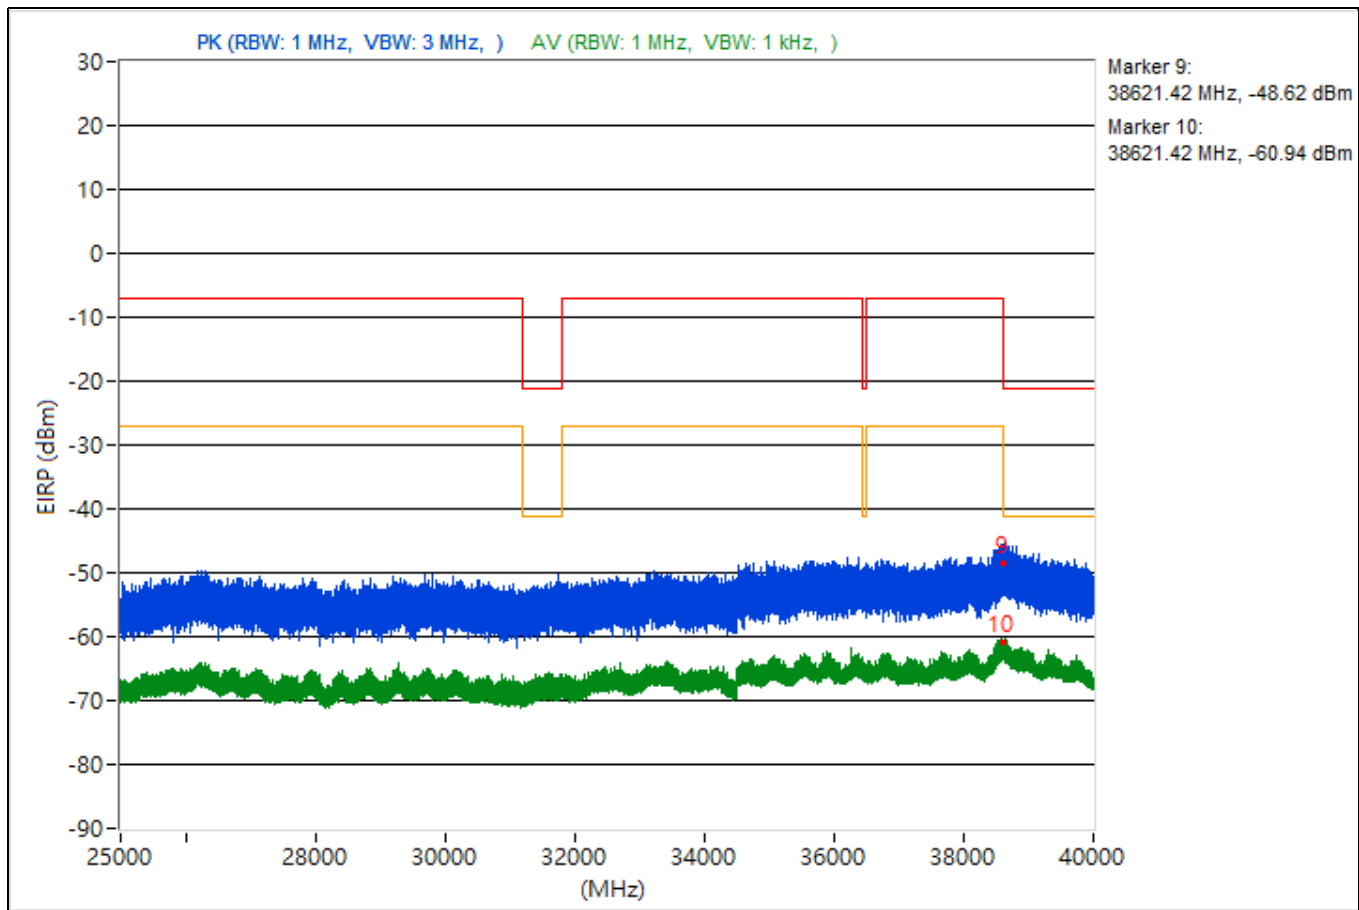


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.11	50.59 PK	74	-23.41	-52.21	-53.04	4.92	-44.67
2	3803.11	37.84 AV	54	-16.16	-66.26	-64.6	4.92	-57.42
3	10655.56	47.25 PK	74	-26.75	-56.07	-55.82	4.92	-48.01
4	10655.56	36.4 AV	54	-17.6	-65.34	-68.98	4.92	-58.86
5	18998.3	48.84 PK	74	-25.16	-54.02	-54.71	4.92	-46.42
6	18998.3	38.67 AV	54	-15.33	-65.38	-63.81	4.92	-56.59
7	23803.9	49.48 PK	74	-24.52	-54.14	-53.31	4.92	-45.78
8	23803.9	39.17 AV	54	-14.83	-66.59	-62.42	4.92	-56.09
9	38637.33	49.02 PK	74	-24.98	-52.94	-55.89	4.92	-46.24
10	38637.33	35.56 AV	54	-18.44	-68.48	-66.92	4.92	-59.7

Note: Margin value = Emission Level - Limit value

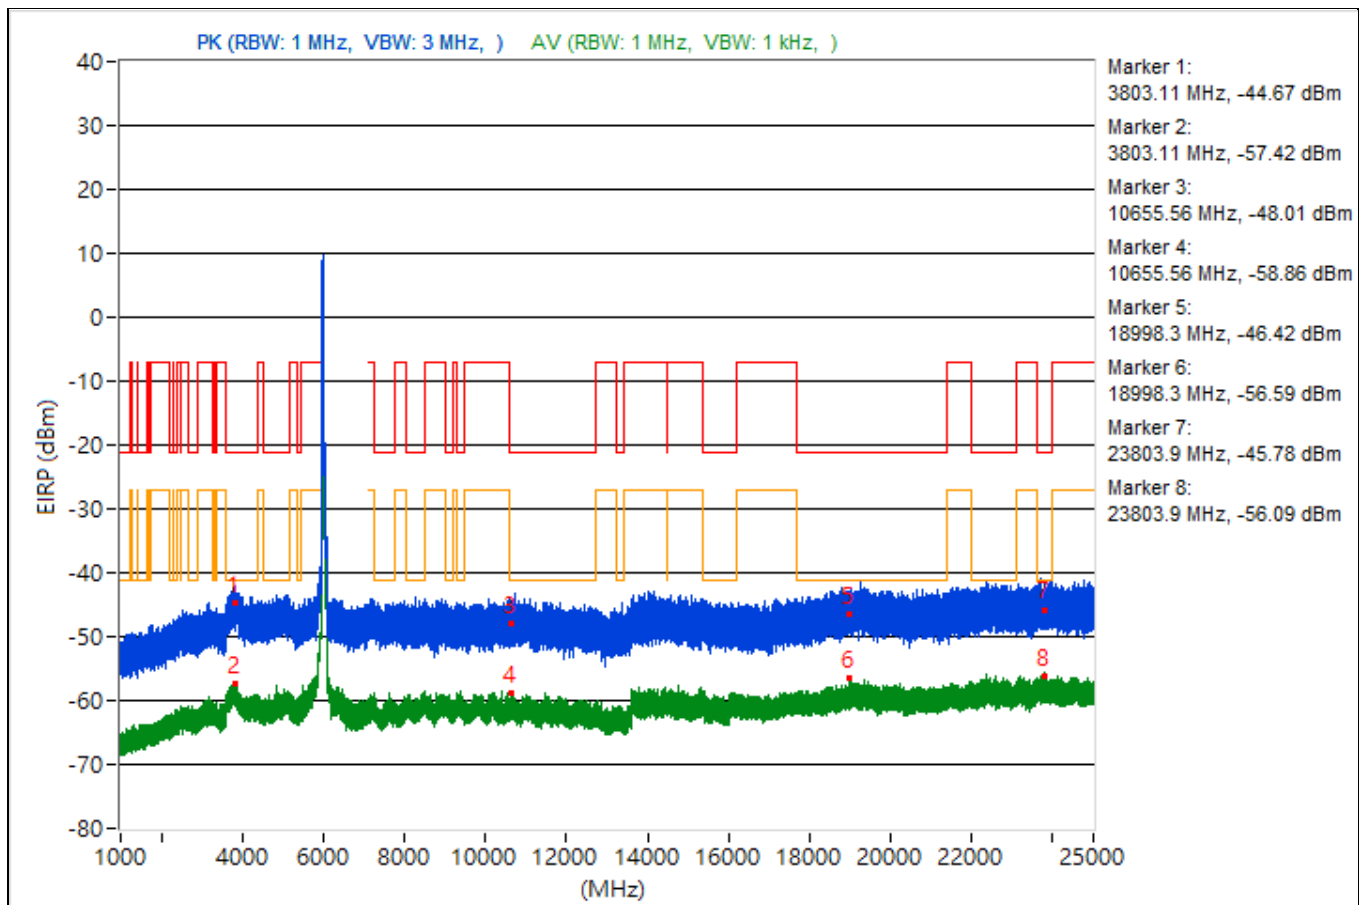


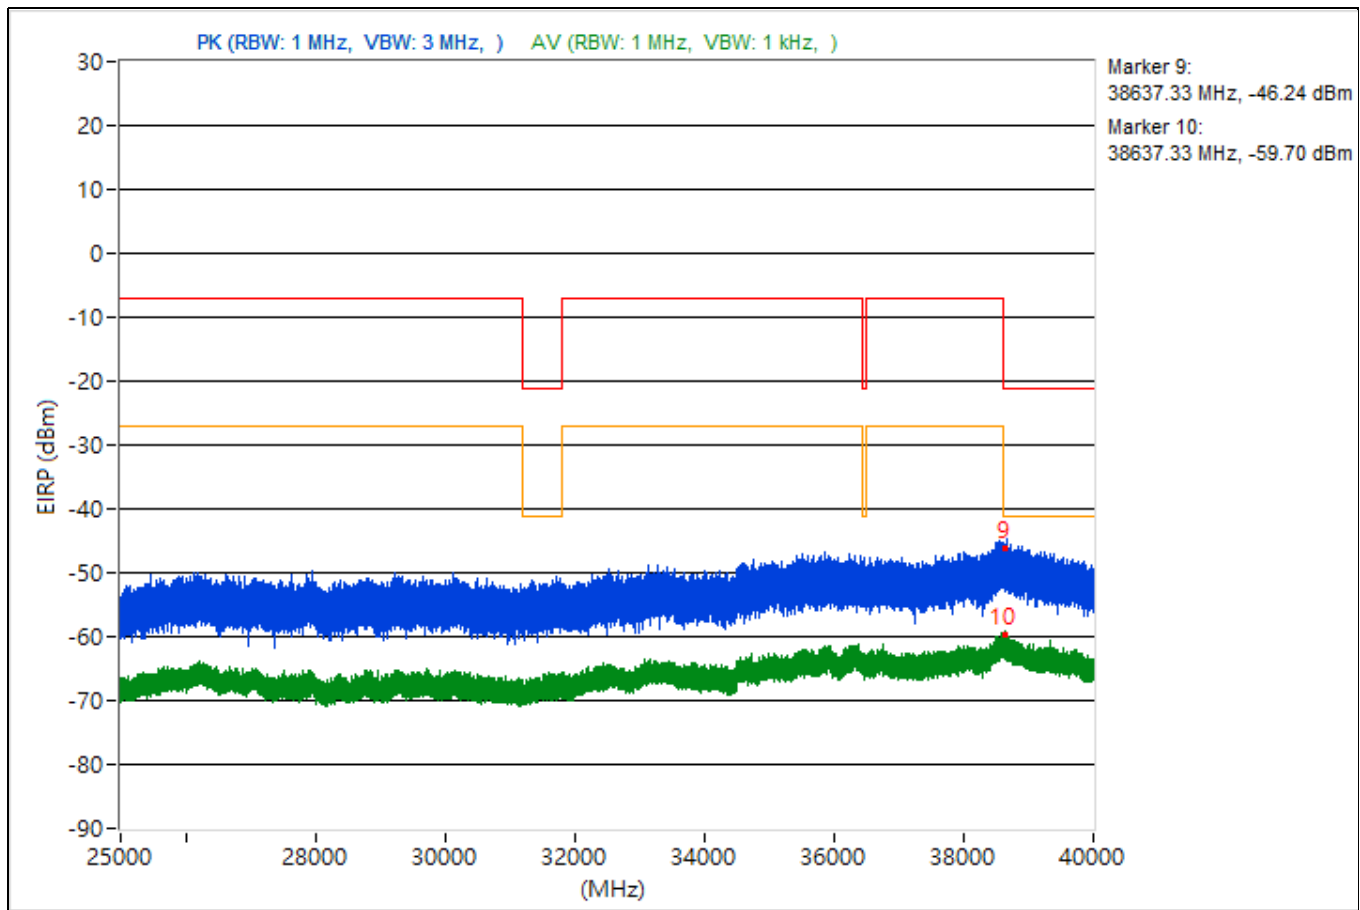


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3726.97	48.29 PK	74	-25.71	-54.49	-55.35	4.92	-46.97
2	3726.97	38.04 AV	54	-15.96	-65.7	-64.67	4.92	-57.22
3	14473.78	50.17 PK	74	-23.83	-51.98	-54.38	4.92	-45.09
4	14473.78	37.08 AV	54	-16.92	-64.96	-67.68	4.92	-58.18
5	19210.5	49.08 PK	74	-24.92	-52.87	-55.86	4.92	-46.18
6	19210.5	38.27 AV	54	-15.73	-63.51	-67.02	4.92	-56.99
7	23990.8	47.83 PK	74	-26.17	-57.01	-54.17	4.92	-47.43
8	23990.8	38.98 AV	54	-15.02	-65.31	-63.34	4.92	-56.28
9	38714.04	44.53 PK	74	-29.47	-57.43	-60.39	4.92	-50.73
10	38714.04	35.22 AV	54	-18.78	-69.93	-66.63	4.92	-60.04

Note: Margin value = Emission Level - Limit value

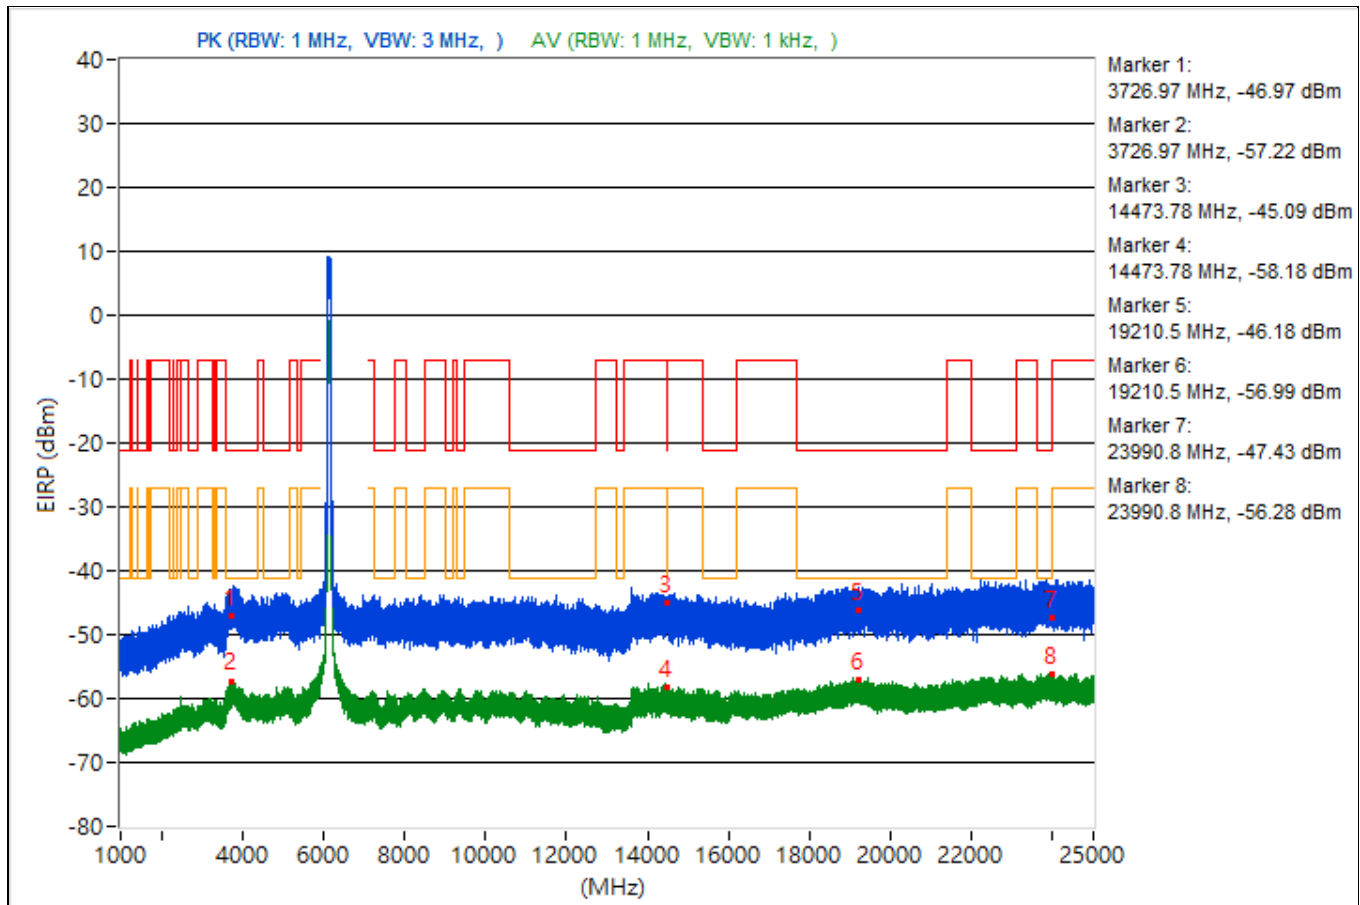


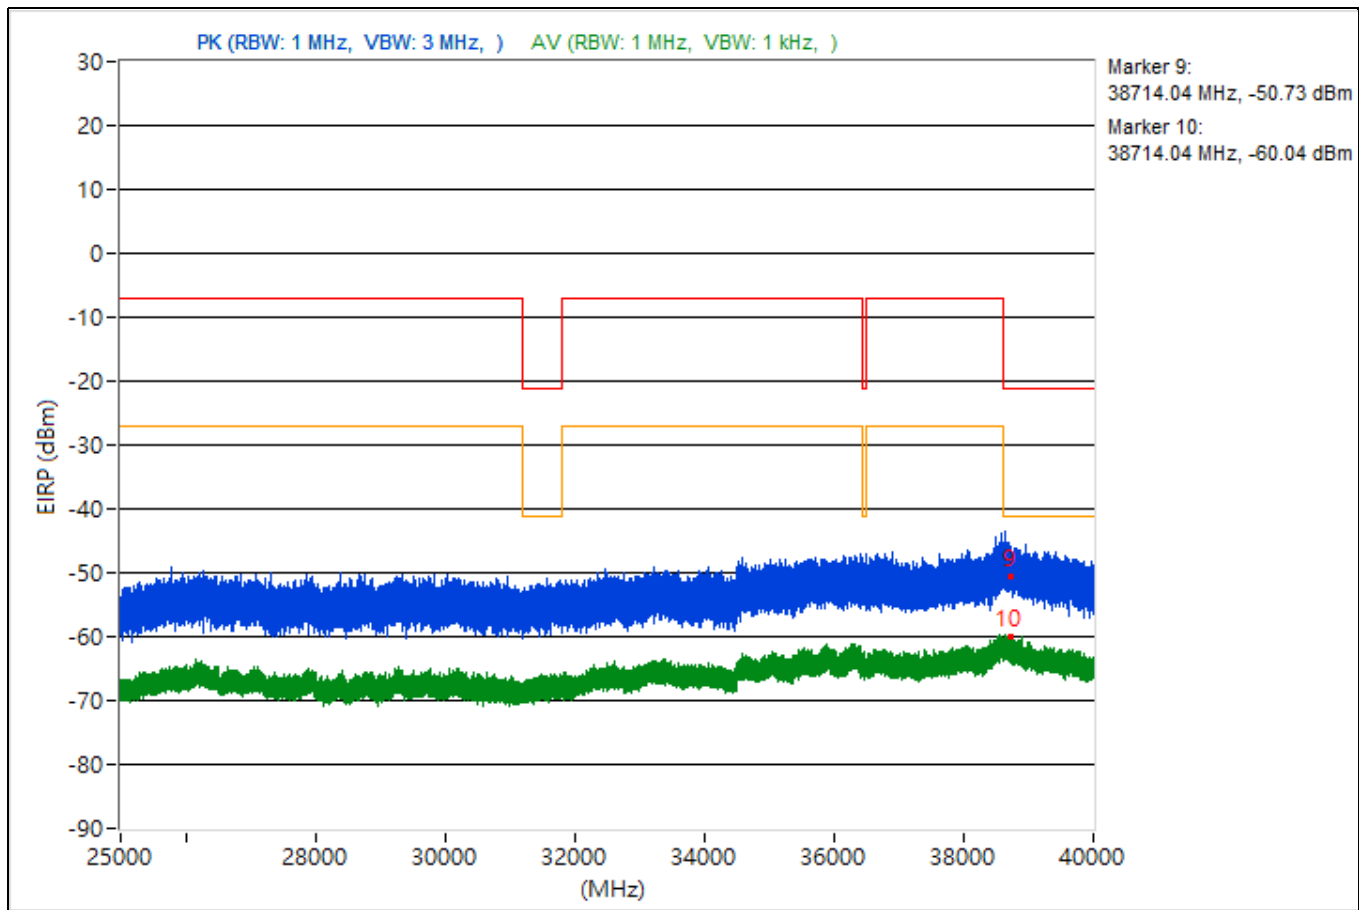


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.43	48.66 PK	74	-25.34	-53.65	-55.63	4.92	-46.6
2	3790.43	37.46 AV	54	-16.54	-64.7	-67.09	4.92	-57.8
3	14478.67	46.5 PK	74	-27.5	-55.87	-57.71	4.92	-48.76
4	14478.67	37.63 AV	54	-16.37	-65.68	-65.44	4.92	-57.63
5	19224.4	50.39 PK	74	-23.61	-51.57	-54.52	4.92	-44.87
6	19224.4	38.54 AV	54	-15.46	-65.64	-63.84	4.92	-56.72
7	22358	49.68 PK	74	-24.32	-55.23	-52.28	4.92	-45.58
8	22358	39 AV	54	-15	-65.78	-63.03	4.92	-56.26
9	38653.24	46.57 PK	74	-27.43	-55.54	-58.06	4.92	-48.69
10	38653.24	35.04 AV	54	-18.96	-70.42	-66.67	4.92	-60.22

Note: Margin value = Emission Level - Limit value

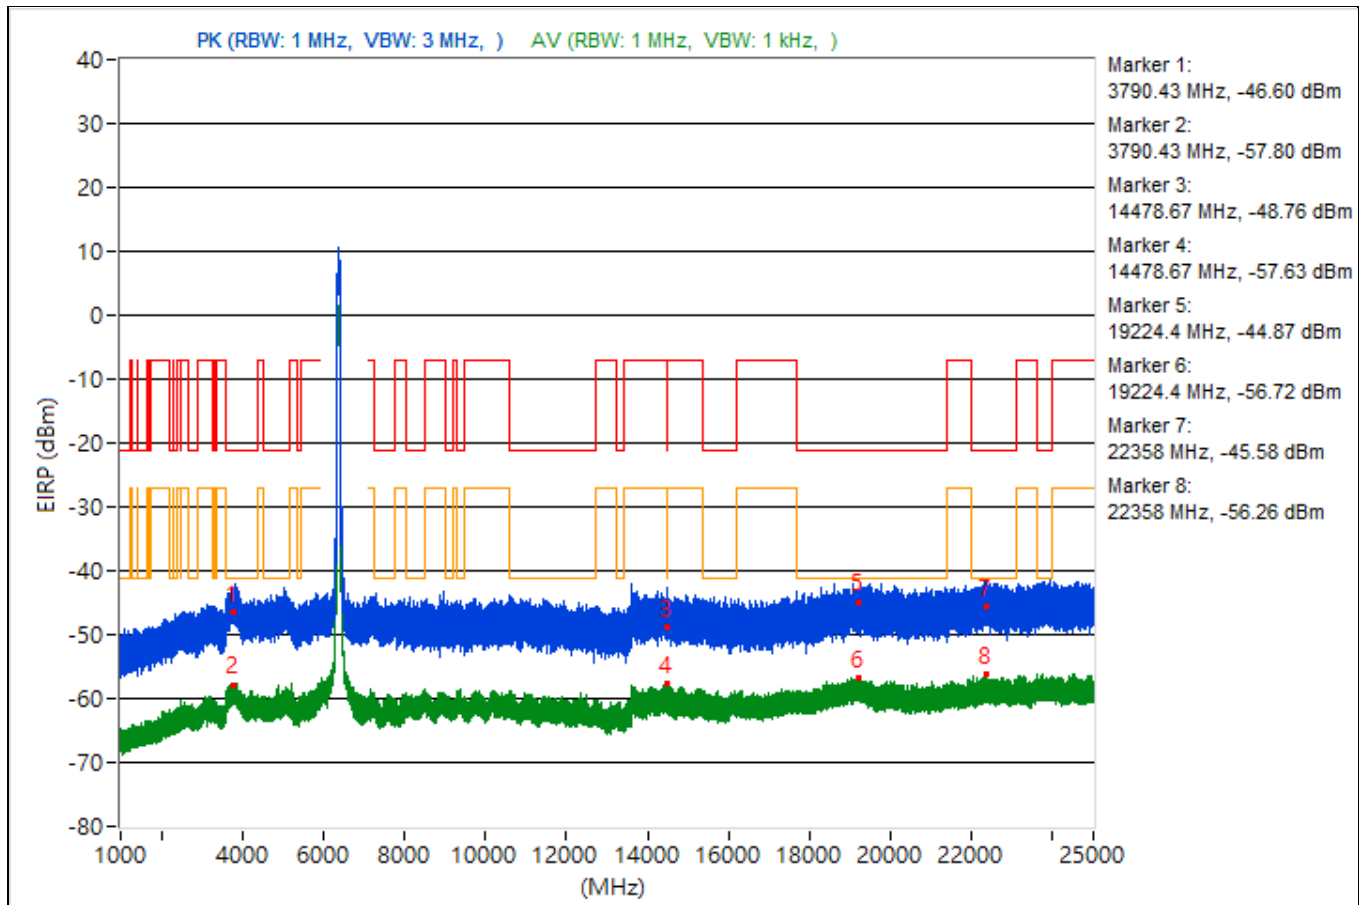


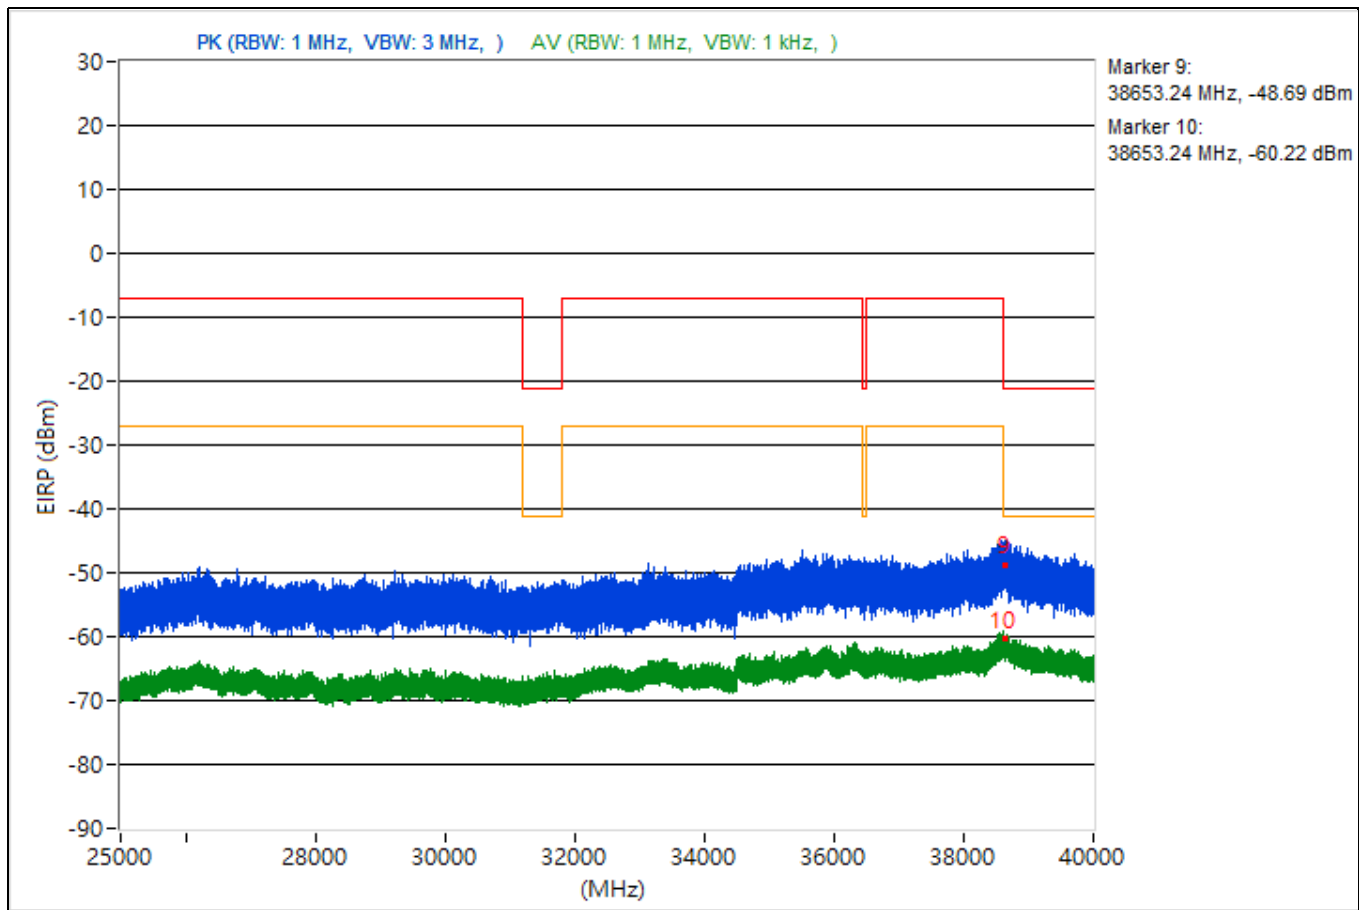


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3779.78	47.76 PK	74	-26.24	-55.61	-55.25	4.92	-47.5
2	3779.78	38.2 AV	54	-15.8	-65.41	-64.6	4.92	-57.06
3	14479.64	47.52 PK	74	-26.48	-54.93	-56.56	4.92	-47.74
4	14479.64	36.76 AV	54	-17.24	-65.52	-67.57	4.92	-58.5
5	19950.4	50.61 PK	74	-23.39	-51.56	-53.92	4.92	-44.65
6	19950.4	37.88 AV	54	-16.12	-63.92	-67.36	4.92	-57.38
7	23974.8	49.05 PK	74	-24.95	-55.96	-52.86	4.92	-46.21
8	23974.8	38.74 AV	54	-15.26	-67.41	-62.71	4.92	-56.52
9	38604.36	44.72 PK	74	-29.28	-58.46	-58.49	4.92	-50.54
10	38604.36	35.73 AV	54	-18.27	-69.66	-66.01	4.92	-59.53

Note: Margin value = Emission Level - Limit value

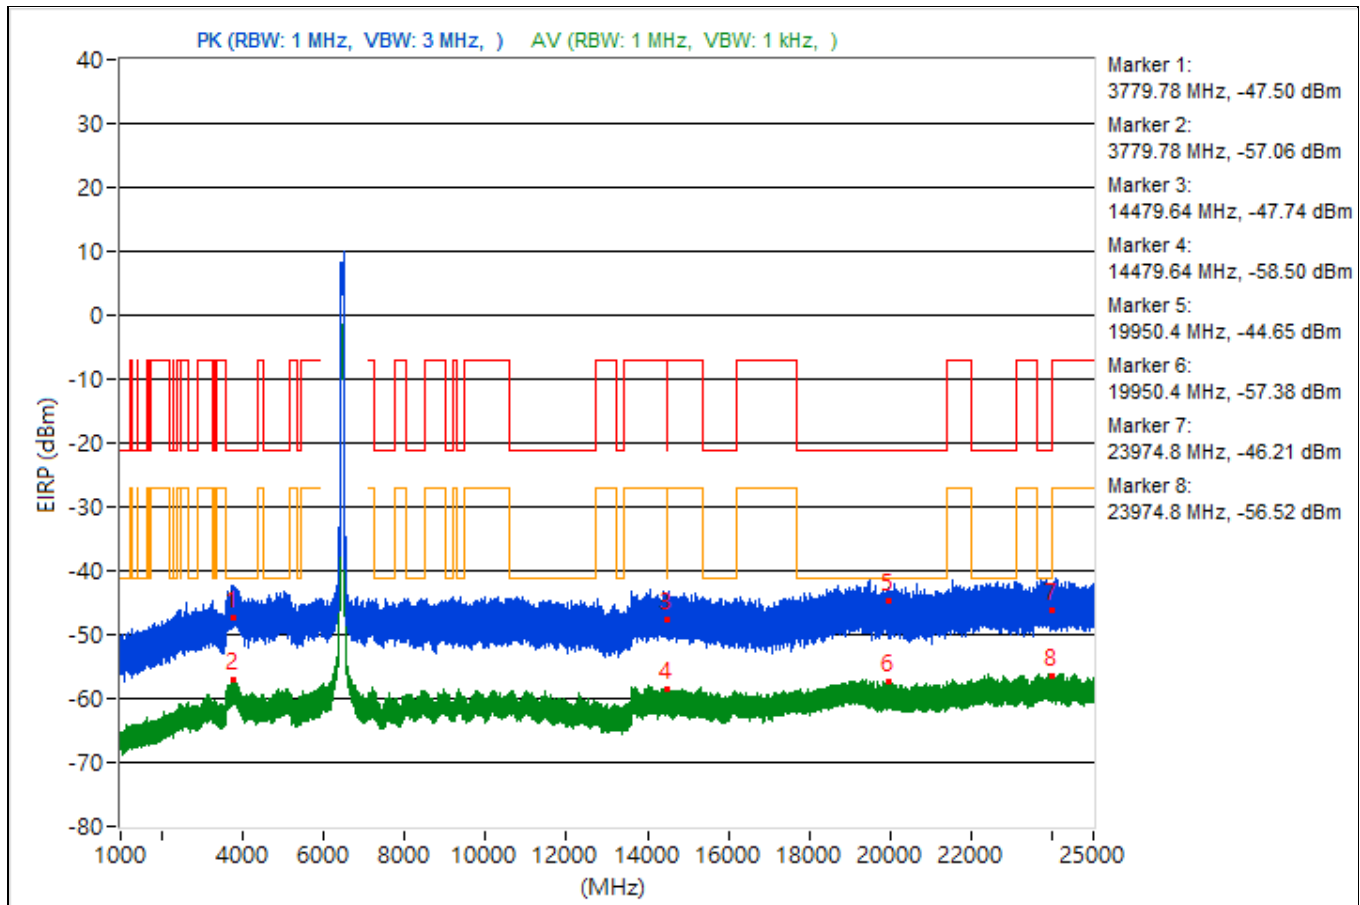


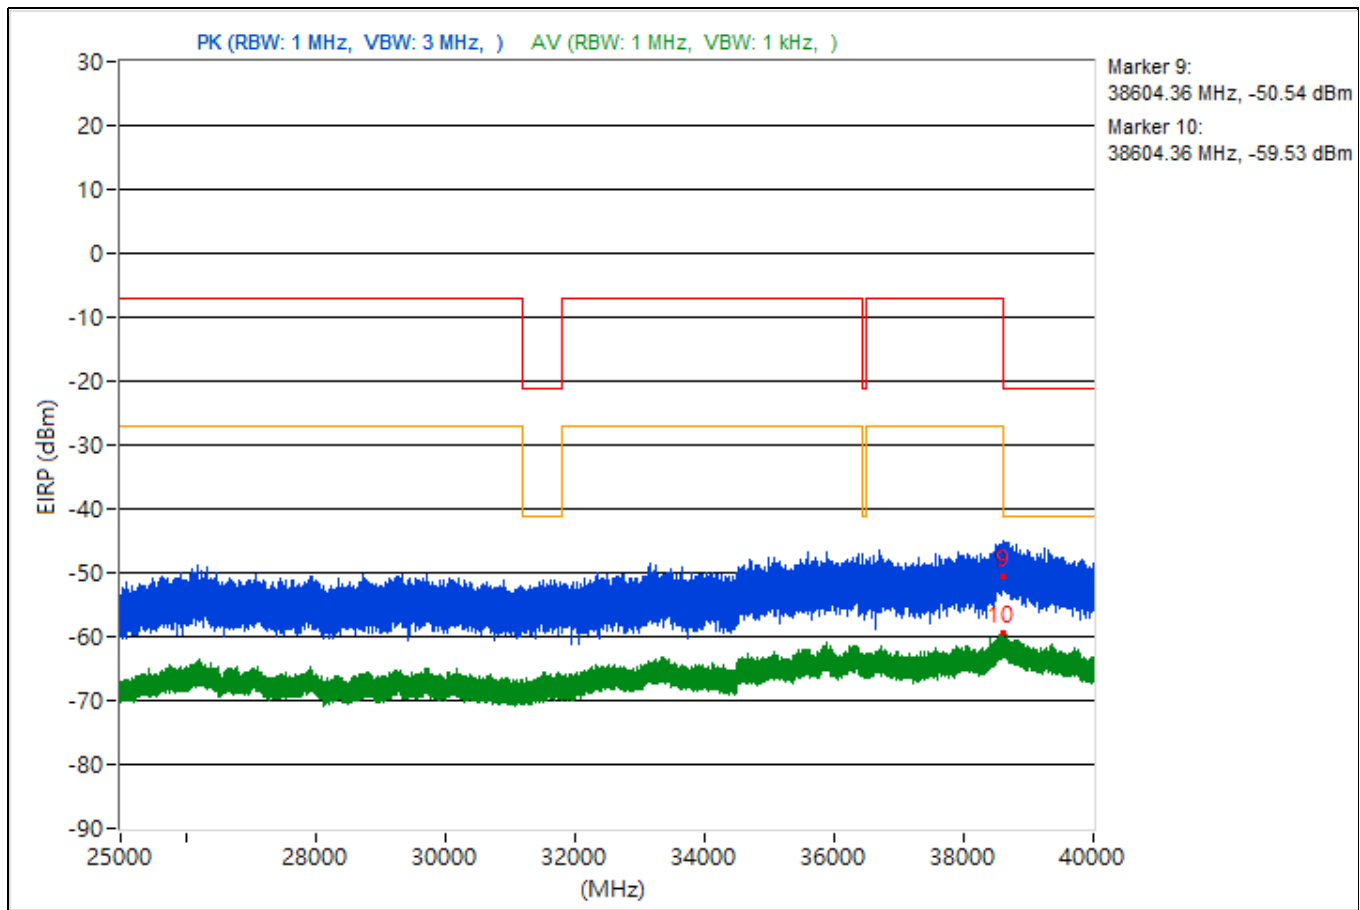


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3762.43	50.61 PK	74	-23.39	-52.06	-53.17	4.92	-44.65
2	3762.43	38.07 AV	54	-15.93	-66.72	-63.96	4.92	-57.19
3	14476.71	48.64 PK	74	-25.36	-53.81	-55.45	4.92	-46.62
4	14476.71	37.16 AV	54	-16.84	-67.27	-65.07	4.92	-58.1
5	20017.7	47.85 PK	74	-26.15	-54.67	-56.14	4.92	-47.41
6	20017.7	37.87 AV	54	-16.13	-67.56	-63.85	4.92	-57.39
7	22215.6	50.17 PK	74	-23.83	-54.25	-52.06	4.92	-45.09
8	22215.6	38.6 AV	54	-15.4	-62.71	-68	4.92	-56.66
9	38623.91	45.23 PK	74	-28.77	-57.86	-58.07	4.92	-50.03
10	38623.91	35.67 AV	54	-18.33	-66.43	-68.99	4.92	-59.59

Note: Margin value = Emission Level - Limit value

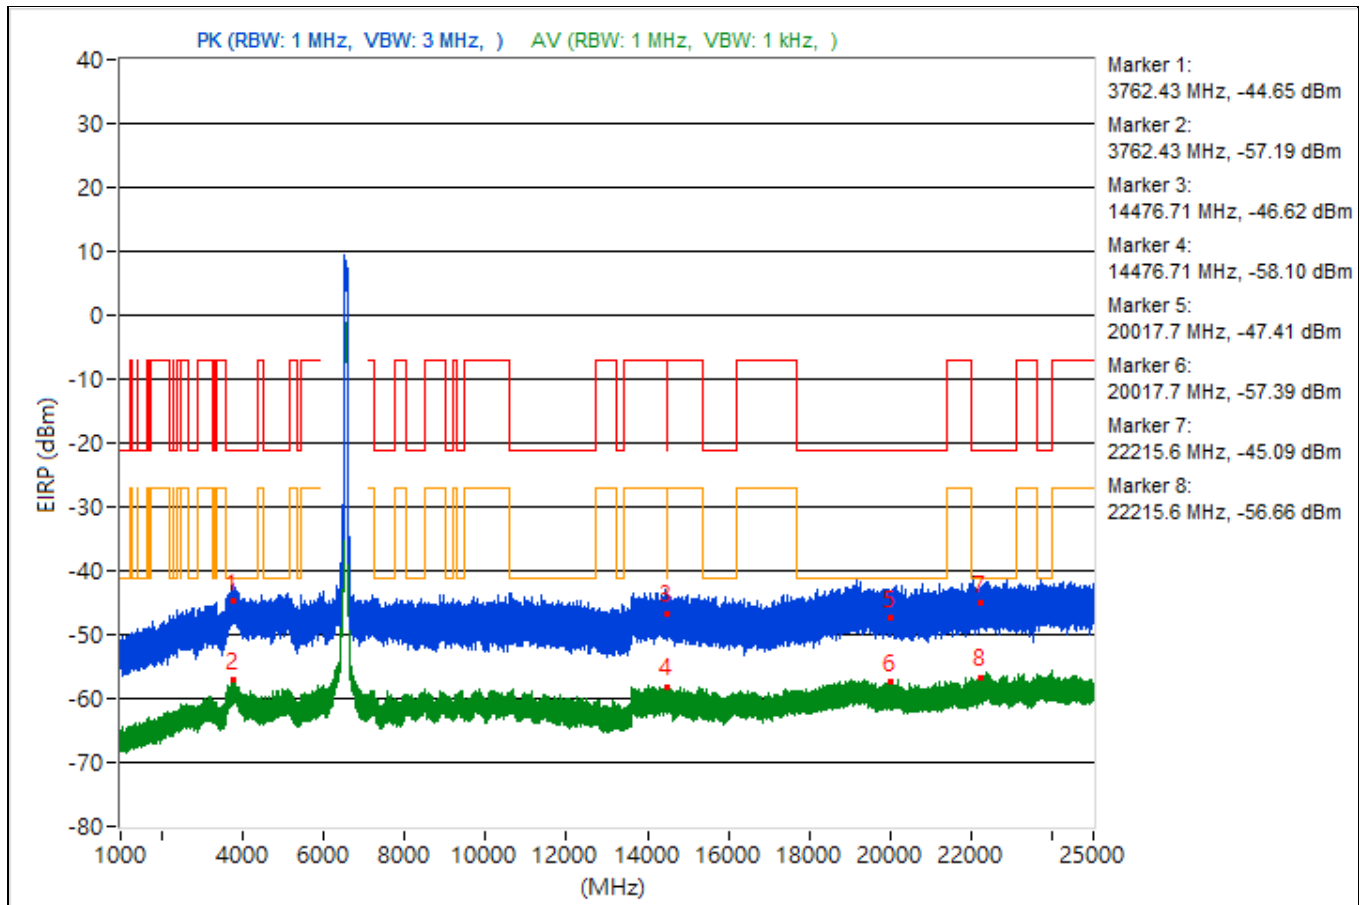


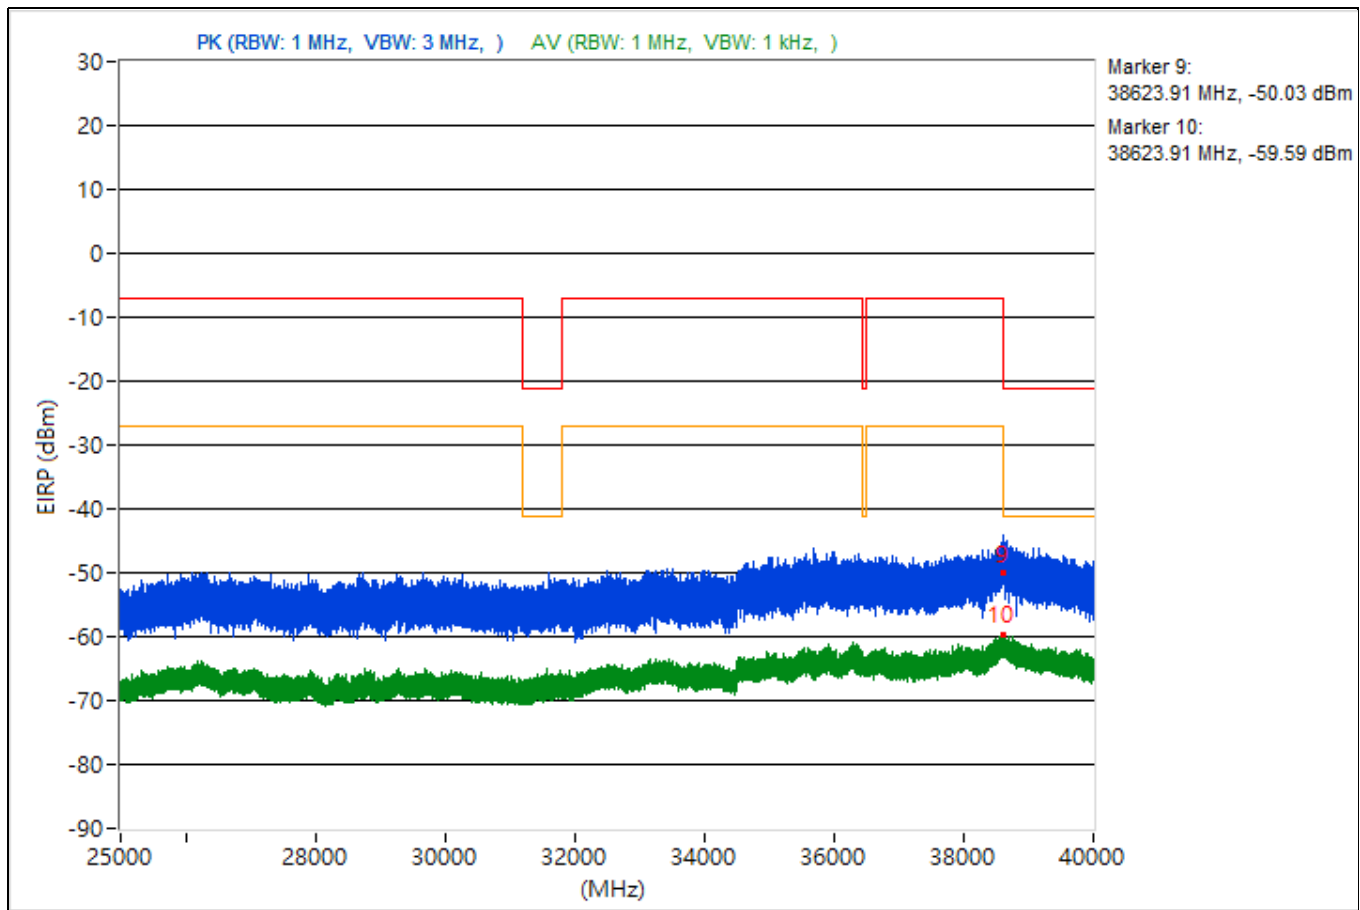


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.81	50.16 PK	74	-23.84	-54.08	-52.18	4.92	-45.1
2	3796.81	37.54 AV	54	-16.46	-67.27	-64.48	4.92	-57.72
3	8475.29	48.2 PK	74	-25.8	-53.46	-57.36	4.92	-47.06
4	8475.29	37.43 AV	54	-16.57	-66.99	-64.79	4.92	-57.83
5	19398.2	49.23 PK	74	-24.77	-53.32	-54.72	4.92	-46.03
6	19398.2	38.58 AV	54	-15.42	-63.41	-66.27	4.92	-56.68
7	23808.8	49.61 PK	74	-24.39	-52.82	-54.5	4.92	-45.65
8	23808.8	38.75 AV	54	-15.25	-62.8	-67.13	4.92	-56.51
9	38615.47	46.37 PK	74	-27.63	-57.11	-56.54	4.92	-48.89
10	38615.47	36.21 AV	54	-17.79	-65.7	-68.8	4.92	-59.05

Note: Margin value = Emission Level - Limit value

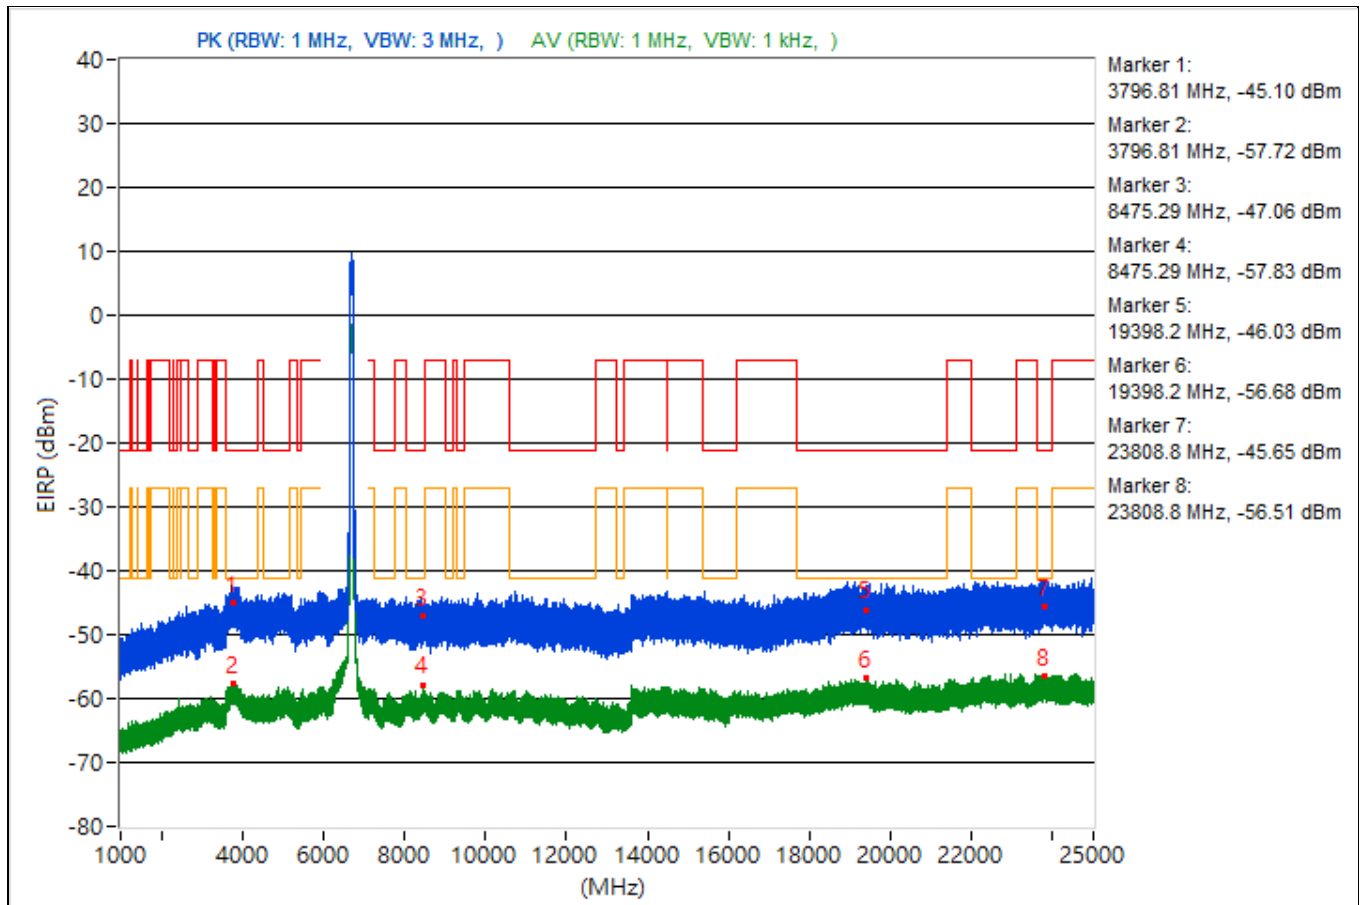


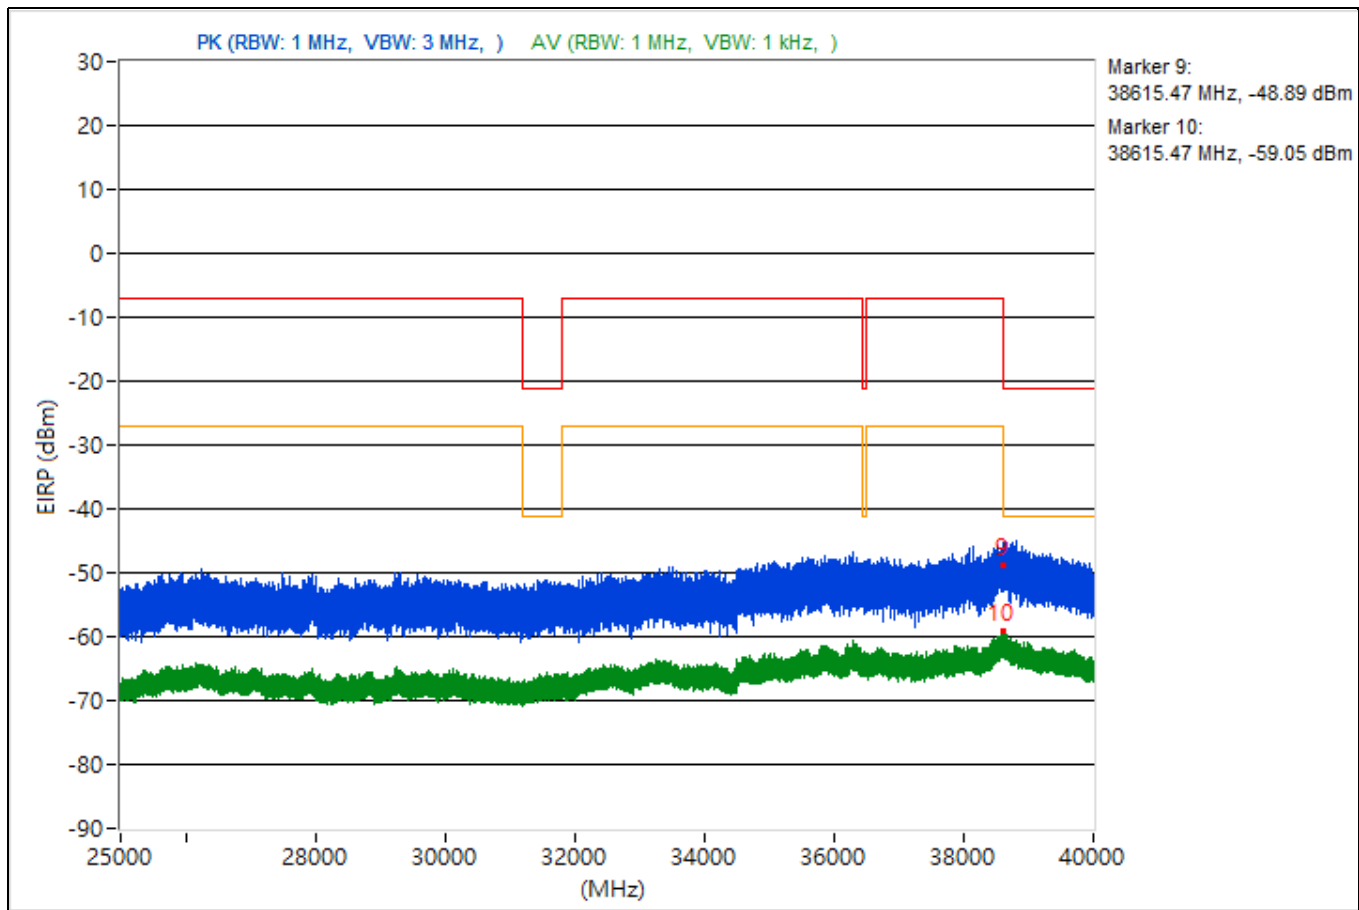


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.83	50.11 PK	74	-23.89	-53.53	-52.66	4.92	-45.15
2	3819.83	38.03 AV	54	-15.97	-67.37	-63.71	4.92	-57.23
3	8481.24	47.04 PK	74	-26.96	-56.06	-56.24	4.92	-48.22
4	8481.24	36.89 AV	54	-17.11	-65.37	-67.49	4.92	-58.37
5	19230.7	46.73 PK	74	-27.27	-57.13	-55.88	4.92	-48.53
6	19230.7	38.19 AV	54	-15.81	-63.85	-66.57	4.92	-57.07
7	23831.8	50.79 PK	74	-23.21	-52.68	-52.13	4.92	-44.47
8	23831.8	38.65 AV	54	-15.35	-66.87	-63.04	4.92	-56.61
9	38606.13	46.06 PK	74	-27.94	-57.63	-56.68	4.92	-49.2
10	38606.13	35.6 AV	54	-18.4	-66.53	-69	4.92	-59.66

Note: Margin value = Emission Level - Limit value

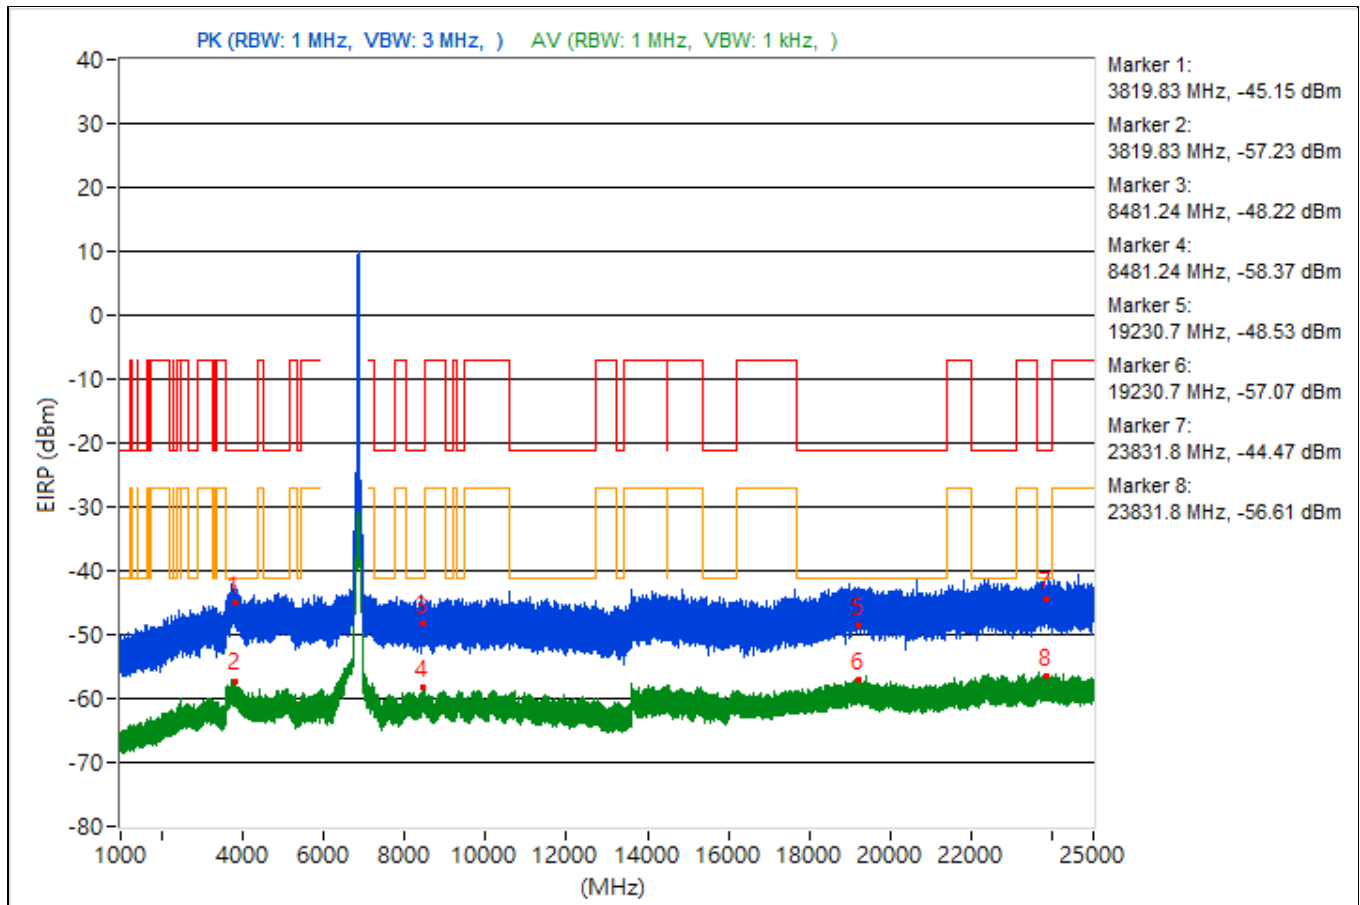


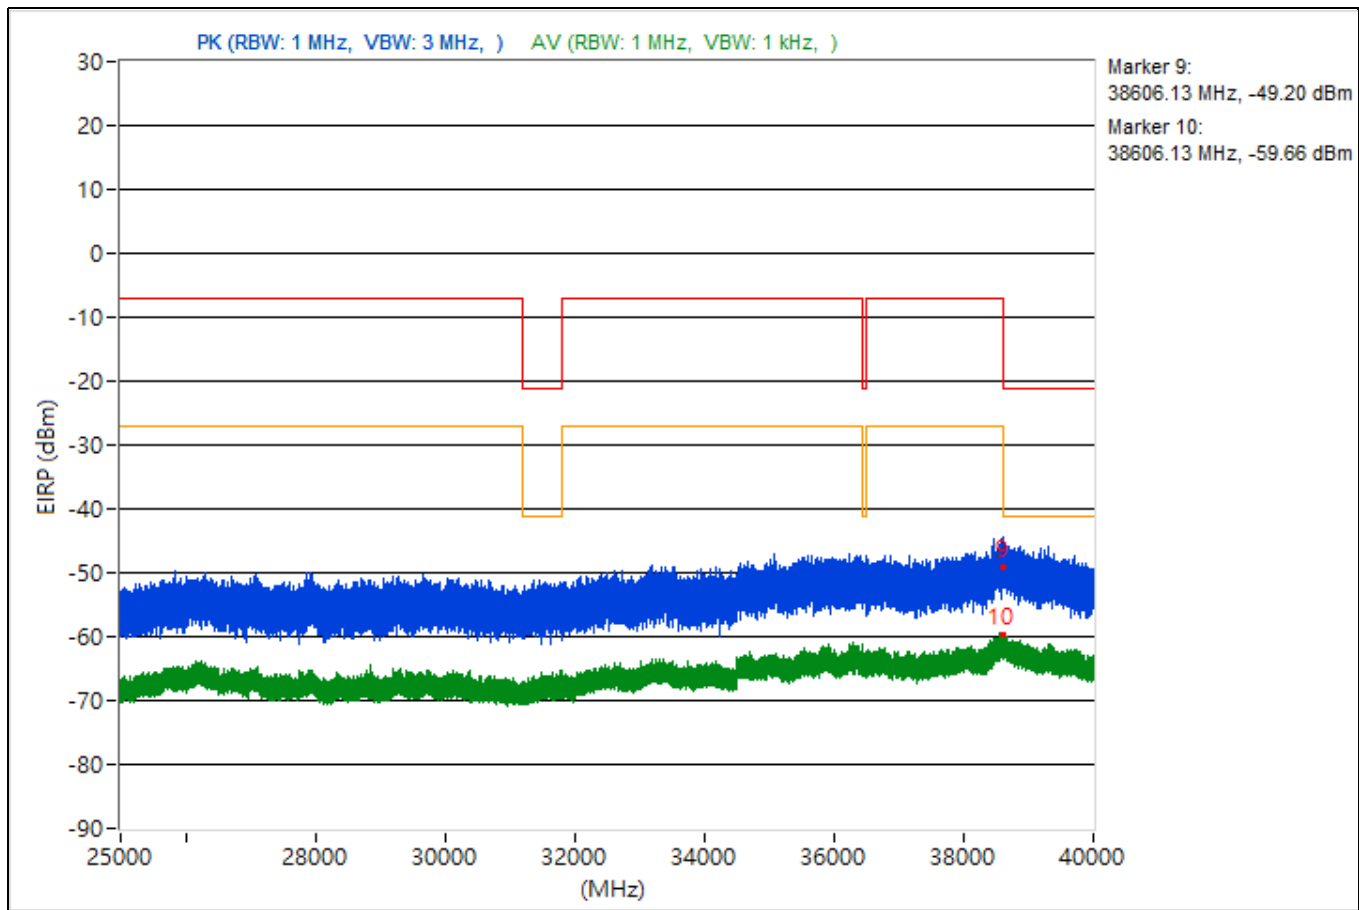


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.23	51.03 PK	74	-22.97	-52.82	-51.59	4.92	-44.23
2	3786.23	37.39 AV	54	-16.61	-68.23	-64.25	4.92	-57.87
3	8448.8	48 PK	74	-26	-56.45	-54.21	4.92	-47.26
4	8448.8	36.86 AV	54	-17.14	-67.83	-65.21	4.92	-58.4
5	19500.8	47.89 PK	74	-26.11	-54.86	-55.78	4.92	-47.37
6	19500.8	38.32 AV	54	-15.68	-65.84	-64.08	4.92	-56.94
7	23800	50.12 PK	74	-23.88	-53.59	-52.6	4.92	-45.14
8	23800	38.83 AV	54	-15.17	-66	-63.17	4.92	-56.43
9	38626.13	46.28 PK	74	-27.72	-56.62	-57.22	4.92	-48.98
10	38626.13	35.57 AV	54	-18.43	-68.8	-66.69	4.92	-59.69

Note: Margin value = Emission Level - Limit value

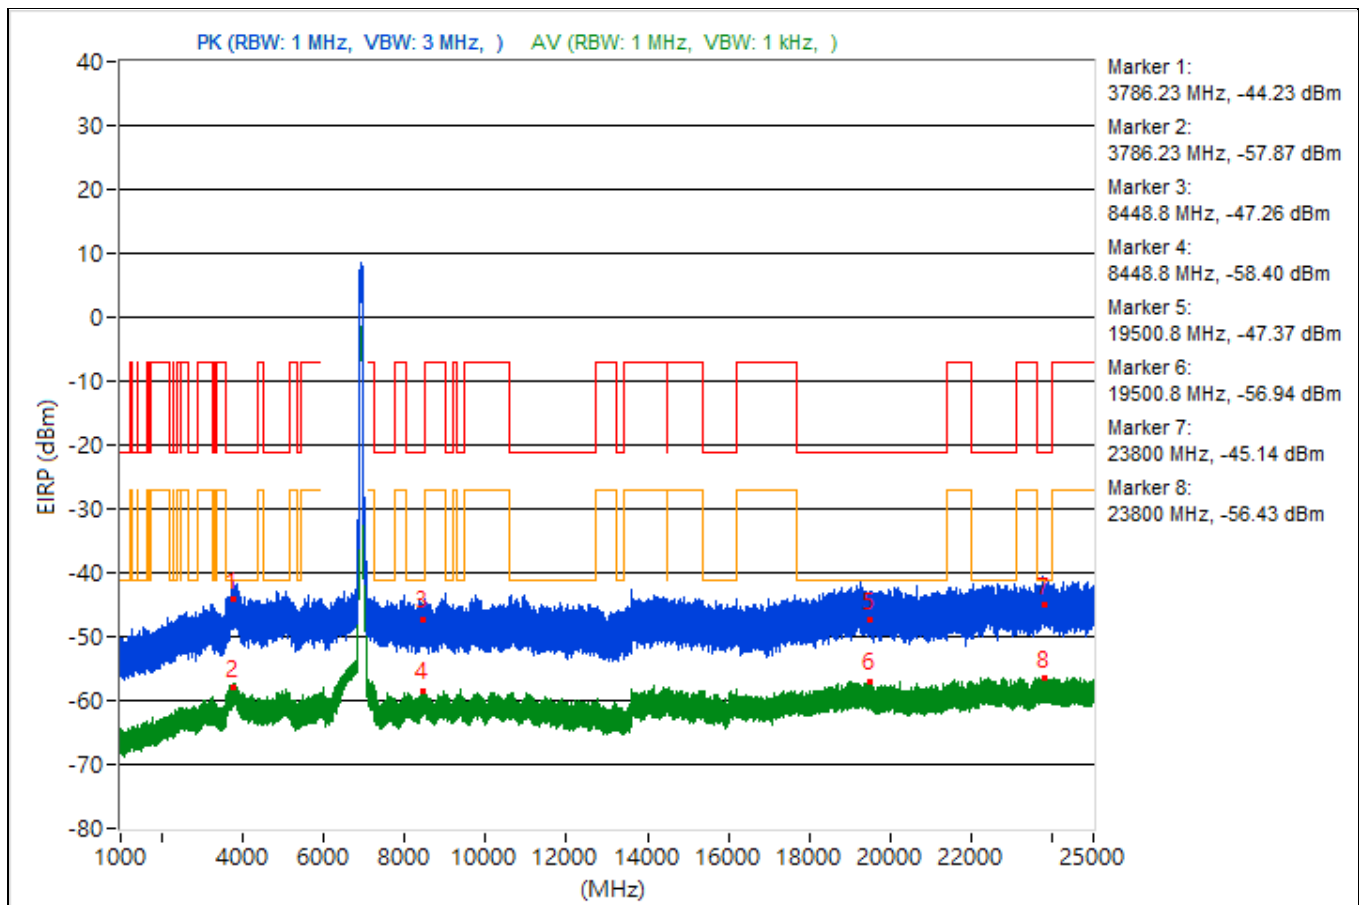


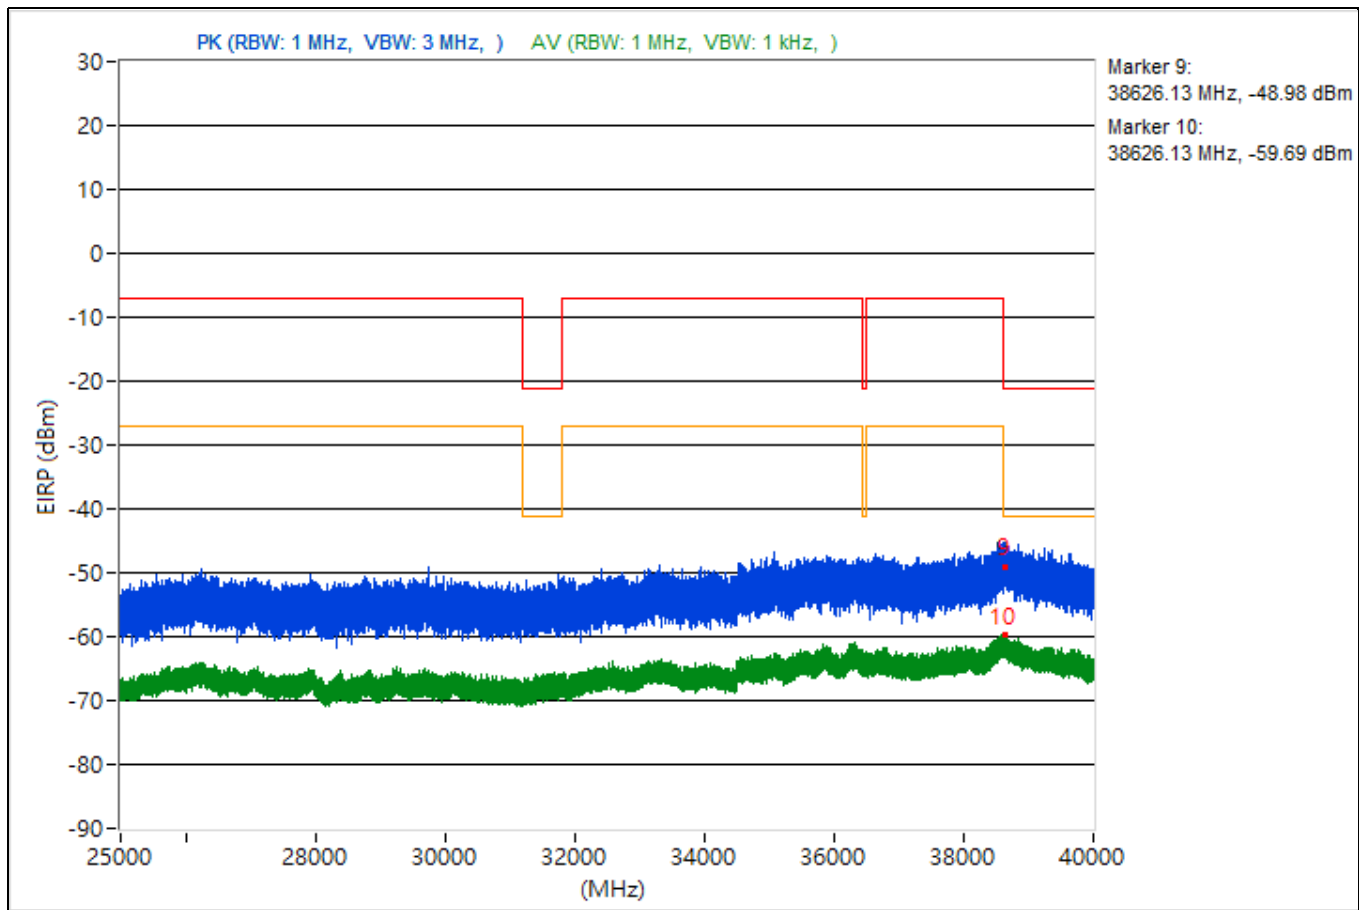


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3837.57	48.01 PK	74	-25.99	-55.86	-54.58	4.92	-47.25
2	3837.57	37.61 AV	54	-16.39	-67.17	-64.42	4.92	-57.65
3	7269.43	46.38 PK	74	-27.62	-56.29	-57.4	4.92	-48.88
4	7269.43	37.14 AV	54	-16.86	-67.7	-64.86	4.92	-58.12
5	19451.2	50.07 PK	74	-23.93	-55.01	-51.81	4.92	-45.19
6	19451.2	37.95 AV	54	-16.05	-66.89	-64.04	4.92	-57.31
7	23838.7	51.06 PK	74	-22.94	-53.64	-51	4.92	-44.2
8	23838.7	38.71 AV	54	-15.29	-62.71	-67.52	4.92	-56.55
9	38605.87	44.98 PK	74	-29.02	-56.99	-59.92	4.92	-50.28
10	38605.87	35.36 AV	54	-18.64	-66.34	-70.12	4.92	-59.9

Note: Margin value = Emission Level - Limit value

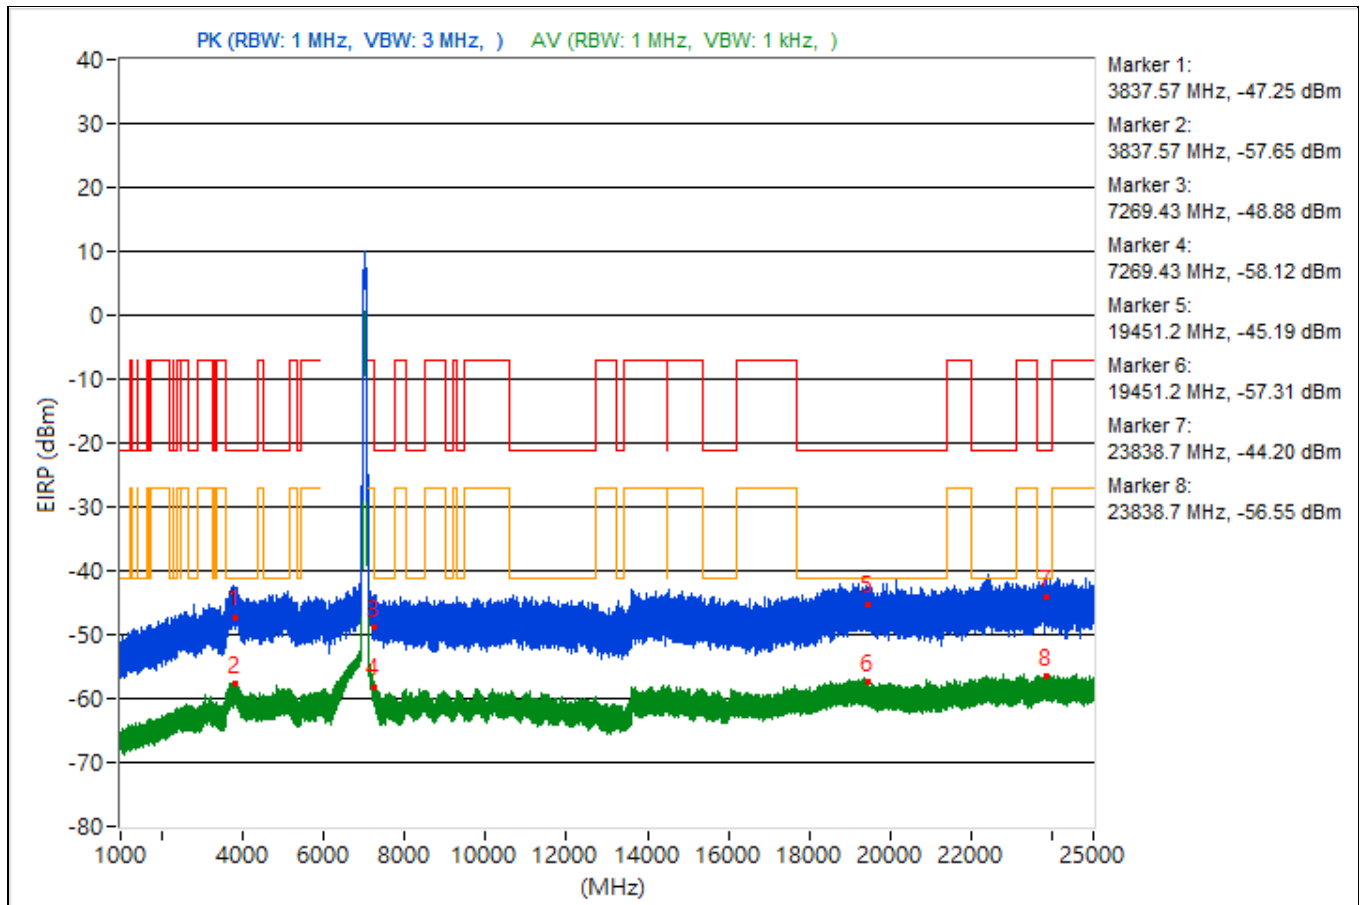


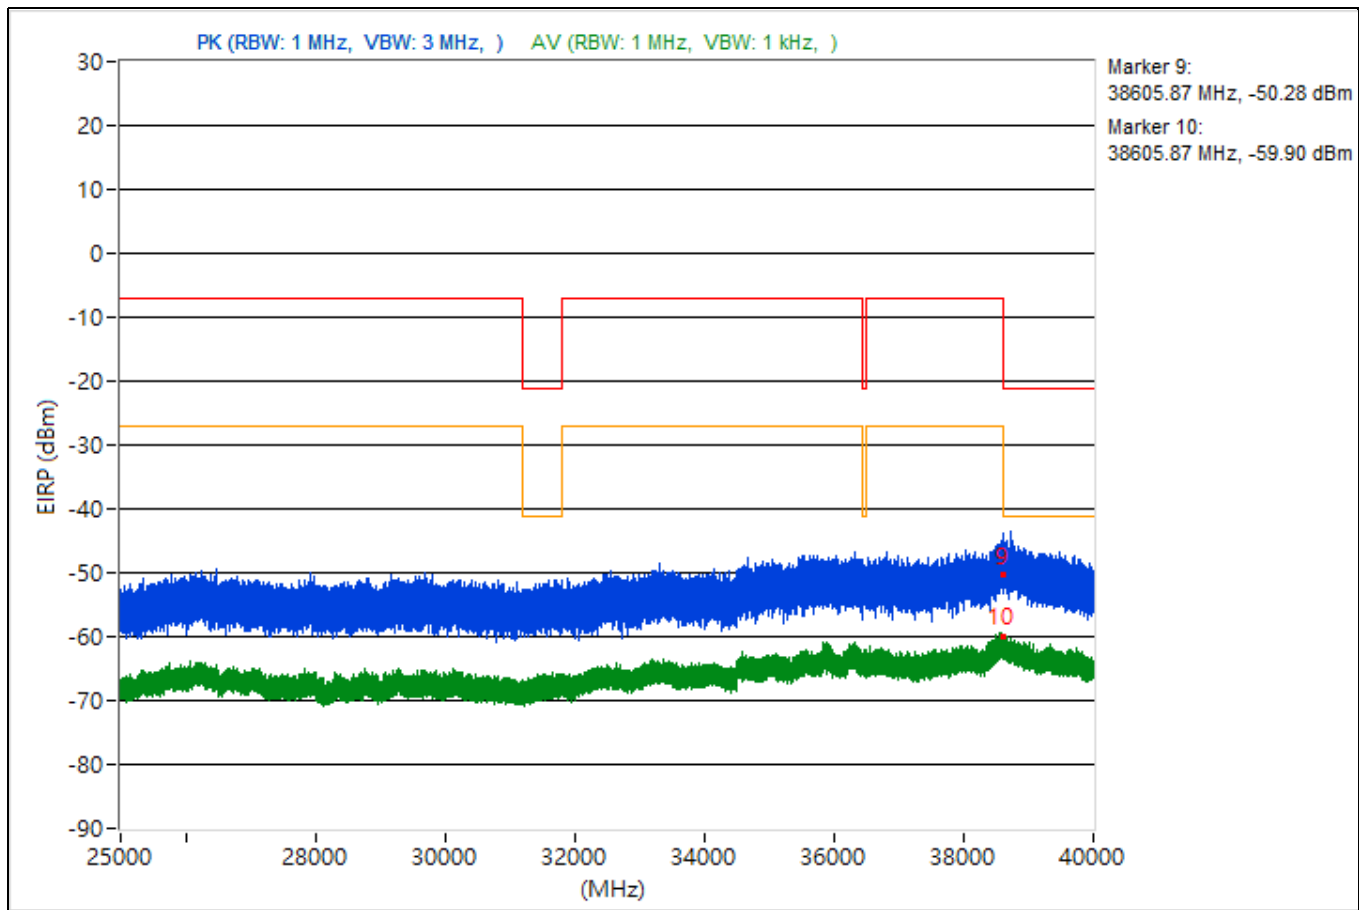


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3884.47	49.82 PK	74	-24.18	-53.84	-52.95	4.92	-45.44
2	3884.47	37.68 AV	54	-16.32	-66.84	-64.5	4.92	-57.58
3	14486.31	49 PK	74	-25	-53.24	-55.39	4.92	-46.26
4	14486.31	37.08 AV	54	-16.92	-67.98	-64.8	4.92	-58.18
5	19112.4	49.25 PK	74	-24.75	-52.77	-55.56	4.92	-46.01
6	19112.4	38.97 AV	54	-15.03	-63.85	-64.62	4.92	-56.29
7	22801.7	49.81 PK	74	-24.19	-51.65	-56.32	4.92	-45.45
8	22801.7	38.85 AV	54	-15.15	-63.21	-65.88	4.92	-56.41
9	38635.29	49.88 PK	74	-24.12	-52.08	-55.03	4.92	-45.38
10	38635.29	35.23 AV	54	-18.77	-67.14	-68.98	4.92	-60.03

Note: Margin value = Emission Level - Limit value

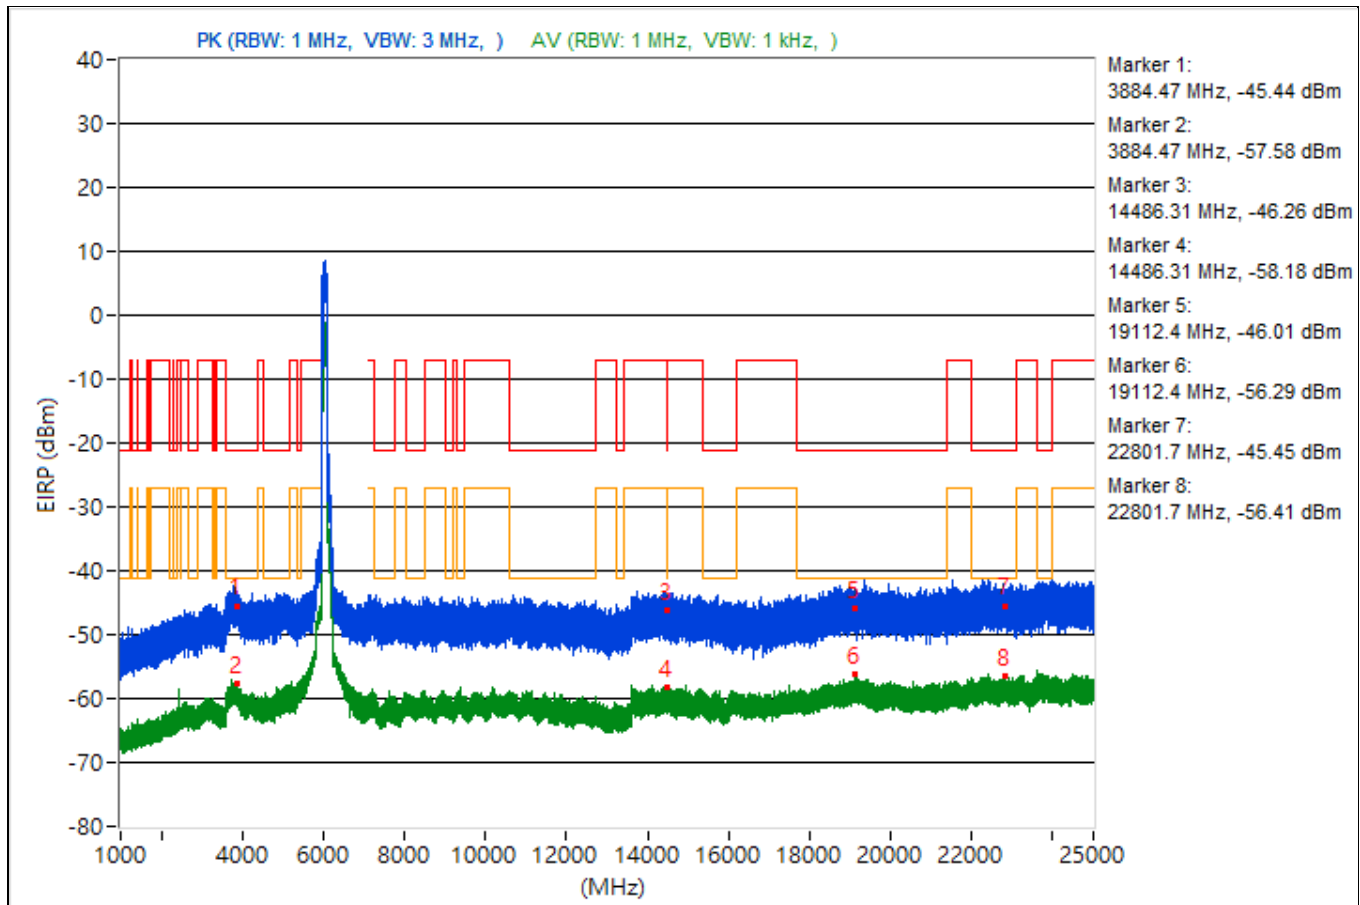


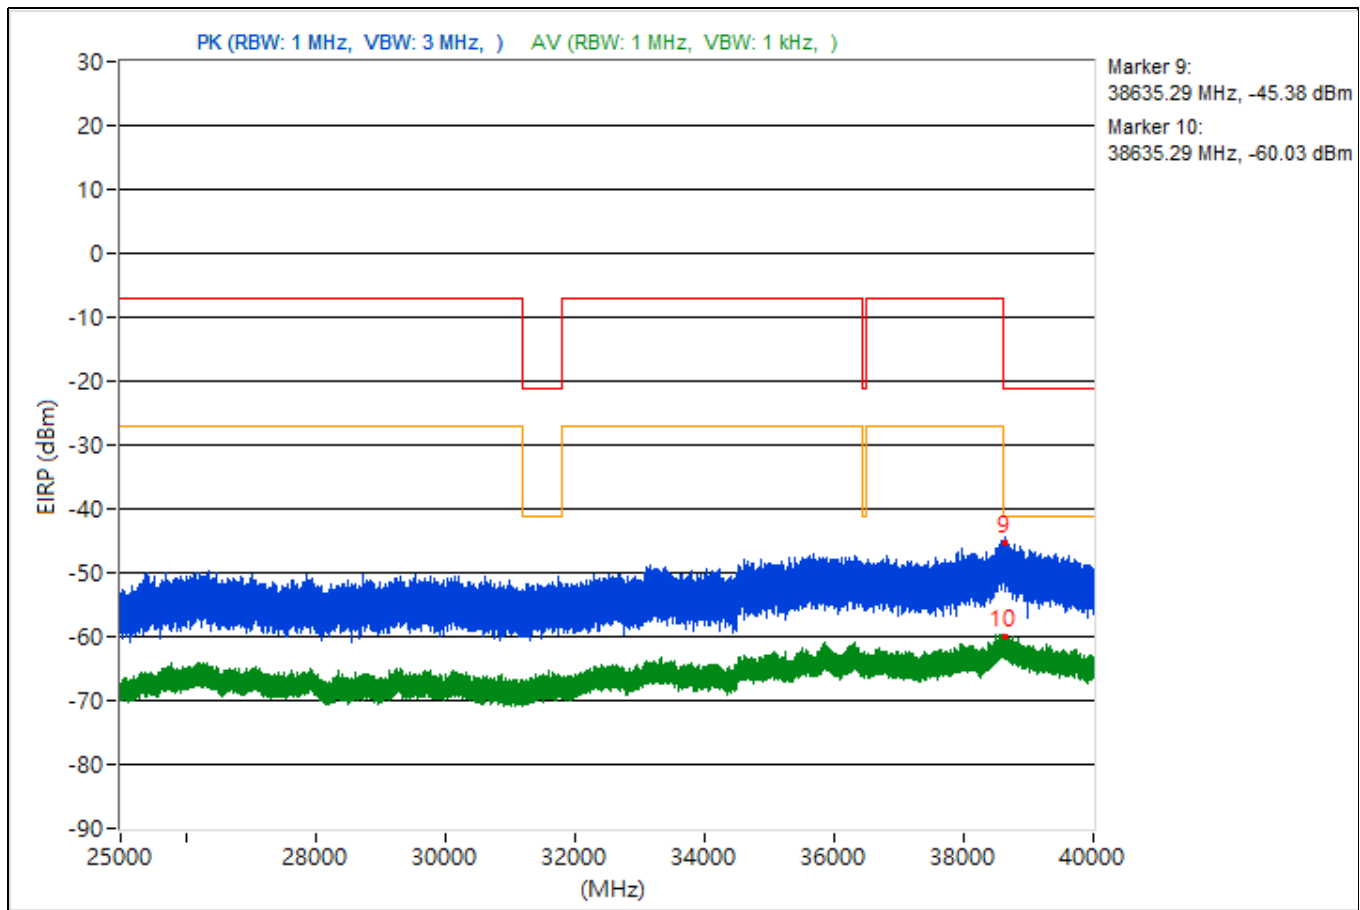


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3728.06	50.09 PK	74	-23.91	-54.93	-51.82	4.92	-45.17
2	3728.06	38.35 AV	54	-15.65	-64.55	-65.15	4.92	-56.91
3	14475.29	46.15 PK	74	-27.85	-59.93	-55.32	4.92	-49.11
4	14475.29	36.81 AV	54	-17.19	-67.3	-65.61	4.92	-58.45
5	19274.9	50.89 PK	74	-23.11	-52.23	-52.37	4.92	-44.37
6	19274.9	37.51 AV	54	-16.49	-68.92	-63.84	4.92	-57.75
7	23977.5	51.42 PK	74	-22.58	-50.75	-53.09	4.92	-43.84
8	23977.5	39.3 AV	54	-14.7	-64.6	-63.28	4.92	-55.96
9	38603.56	45.27 PK	74	-28.73	-58.26	-57.61	4.92	-49.99
10	38603.56	36.08 AV	54	-17.92	-66.45	-67.89	4.92	-59.18

Note: Margin value = Emission Level - Limit value

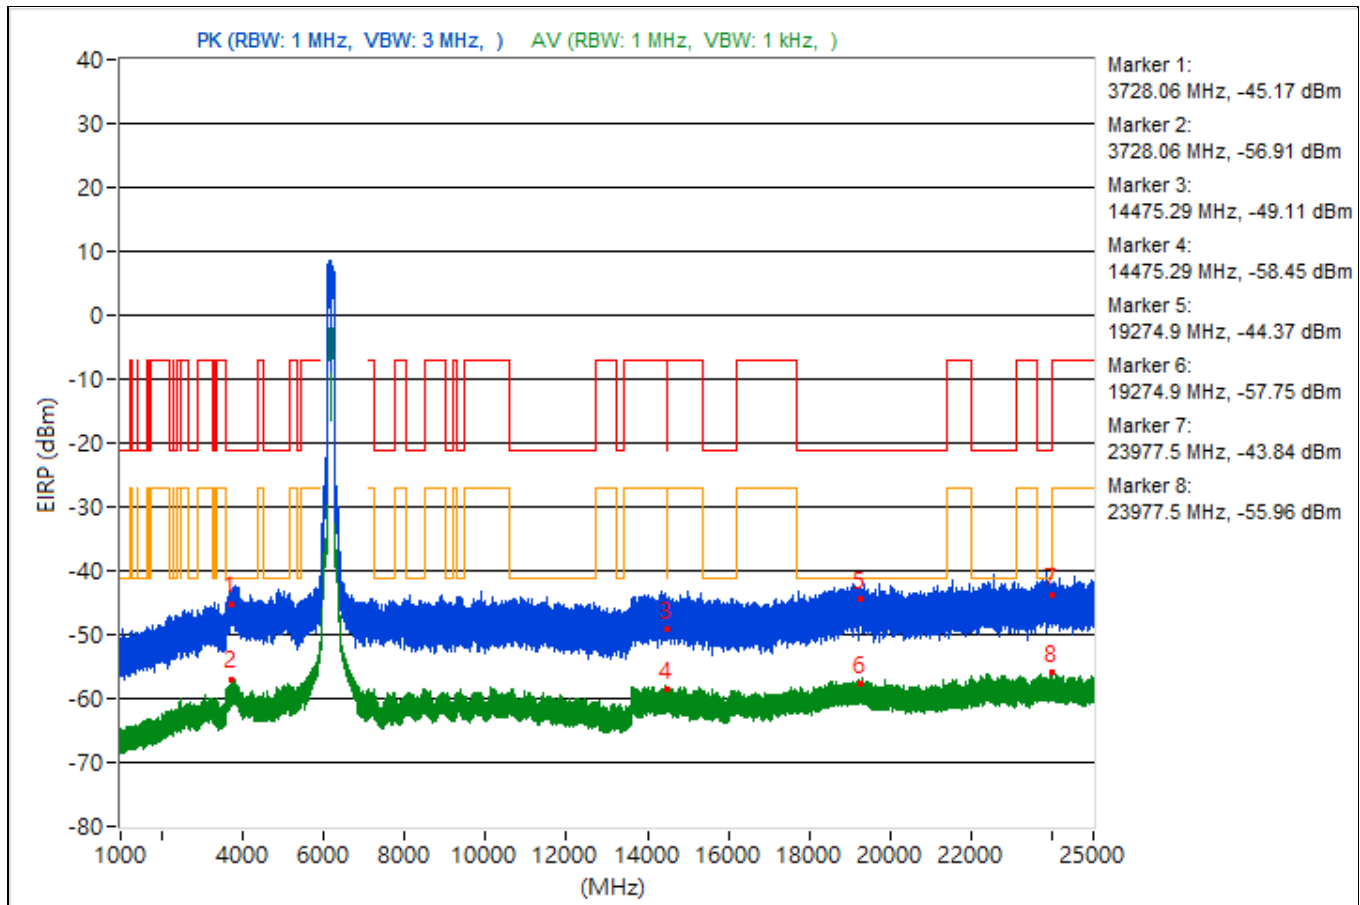


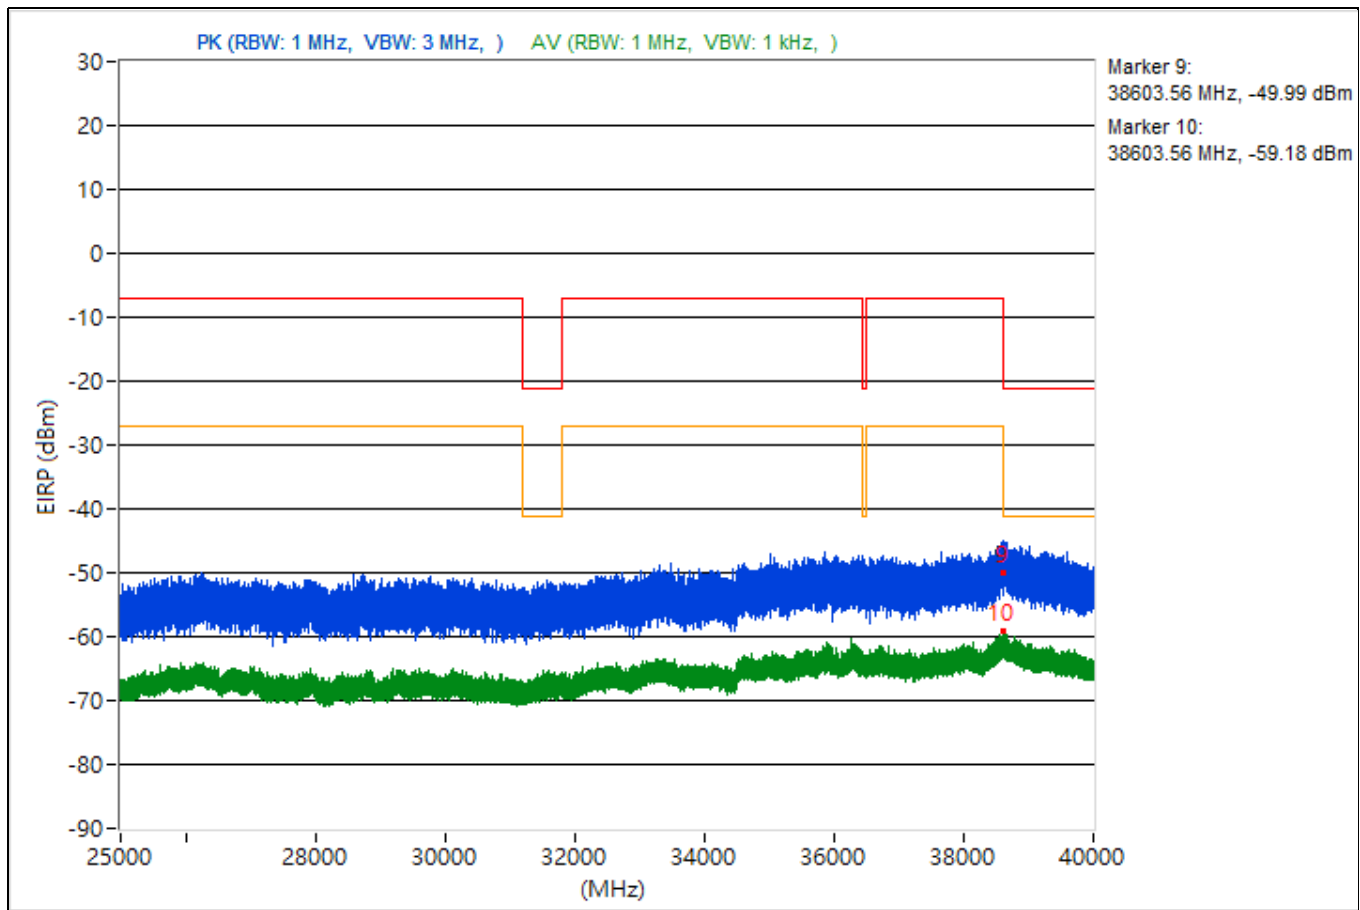


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.19	48.6 PK	74	-25.4	-53.91	-55.4	4.92	-46.66
2	3796.19	37.94 AV	54	-16.06	-66.14	-64.52	4.92	-57.32
3	14481.07	47.52 PK	74	-26.48	-54.27	-57.74	4.92	-47.74
4	14481.07	36.98 AV	54	-17.02	-67.28	-65.35	4.92	-58.28
5	19126.4	50.24 PK	74	-23.76	-52.04	-54.11	4.92	-45.02
6	19126.4	37.87 AV	54	-16.13	-68.65	-63.46	4.92	-57.39
7	23614.7	51.8 PK	74	-22.2	-52.97	-50.24	4.92	-43.46
8	23614.7	39.2 AV	54	-14.8	-62.8	-65.64	4.92	-56.06
9	38649.42	44.3 PK	74	-29.7	-58.88	-58.9	4.92	-50.96
10	38649.42	35.32 AV	54	-18.68	-69.26	-66.82	4.92	-59.94

Note: Margin value = Emission Level - Limit value

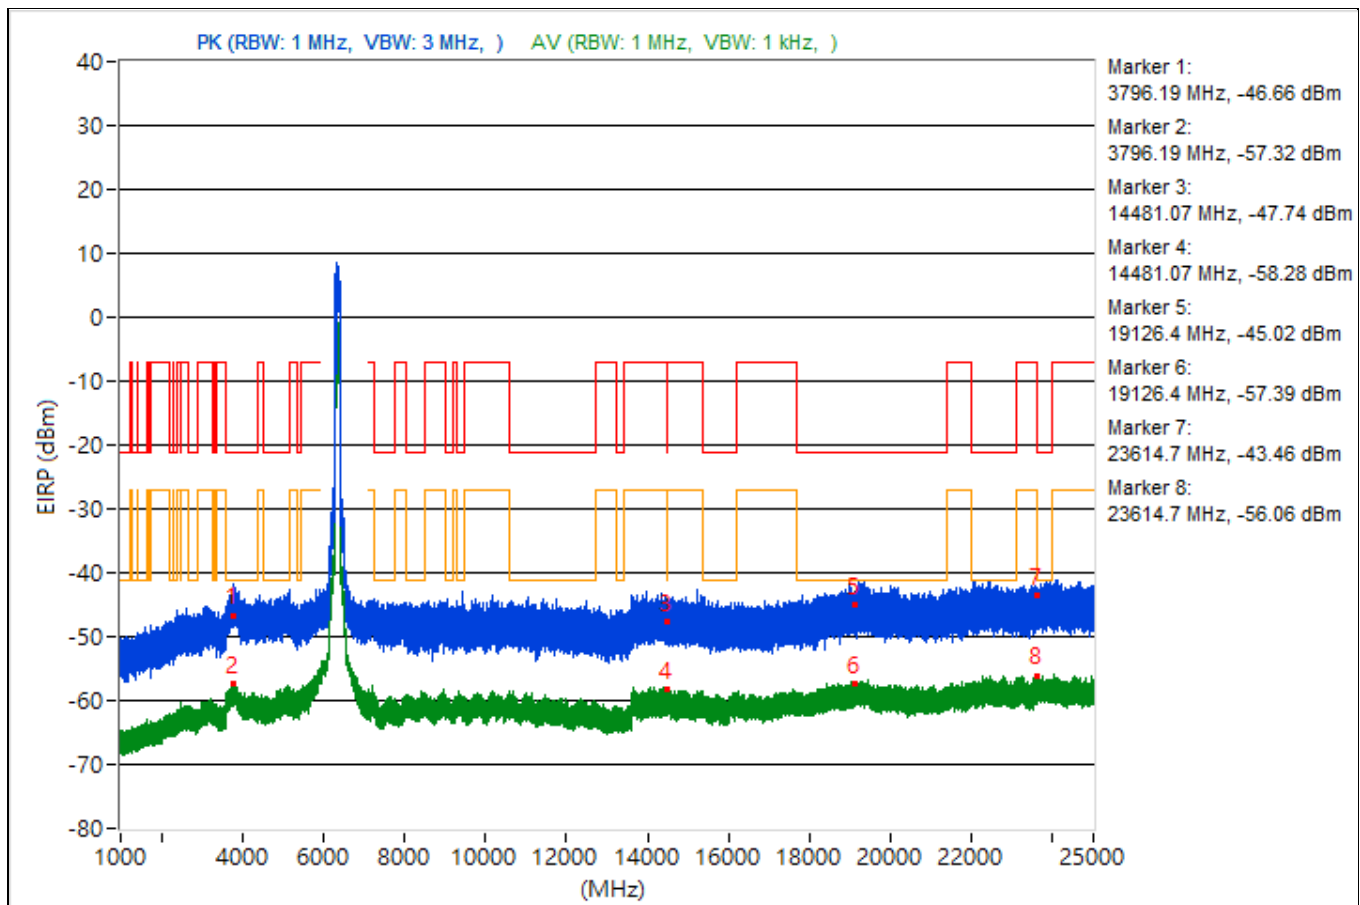


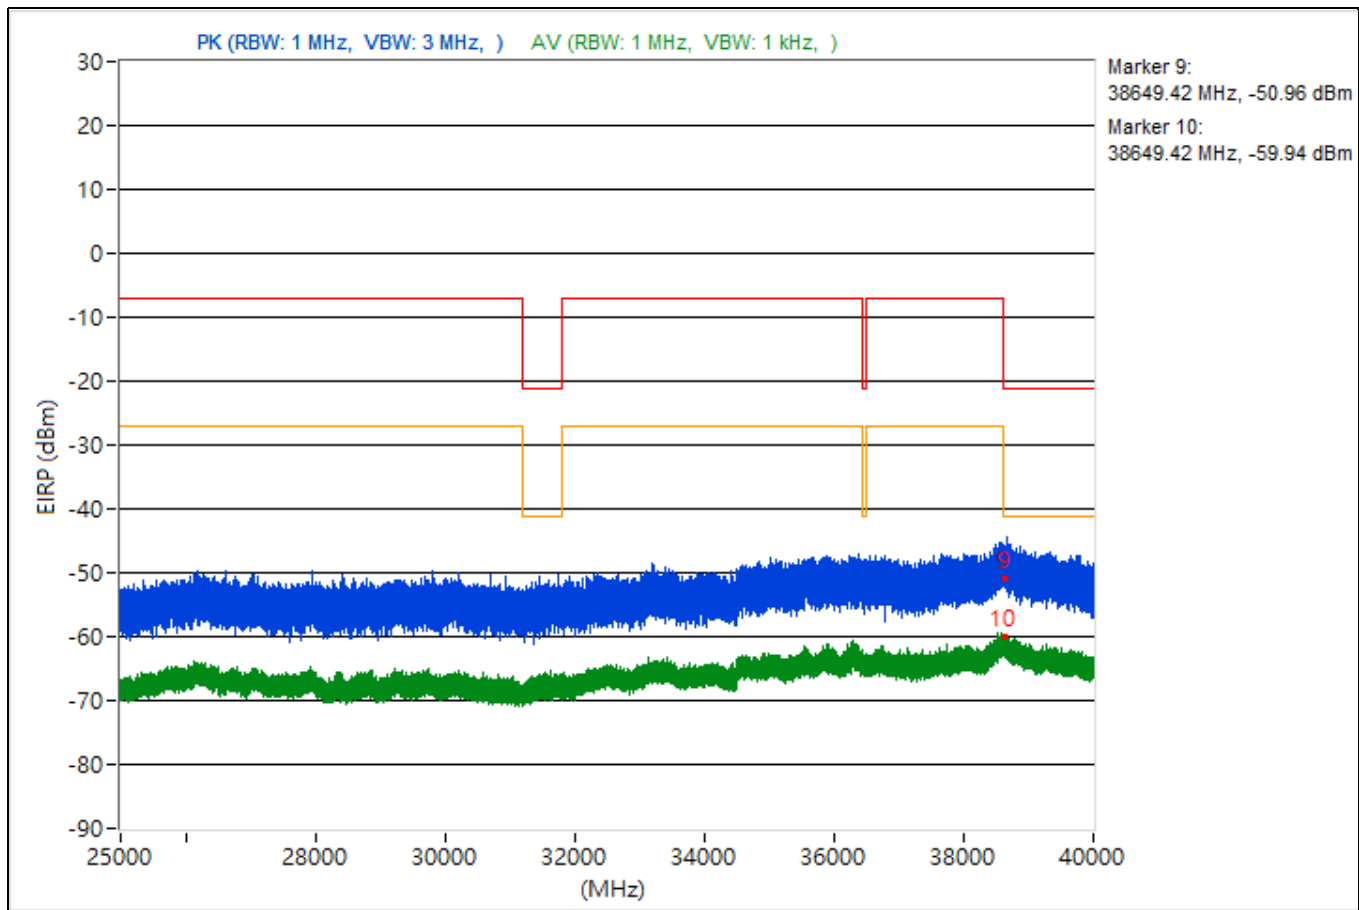


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.21	48.34 PK	74	-25.66	-54.86	-54.84	4.92	-46.92
2	3763.21	38.23 AV	54	-15.77	-64.44	-65.56	4.92	-57.03
3	14480.62	48.24 PK	74	-25.76	-55.37	-54.57	4.92	-47.02
4	14480.62	37.32 AV	54	-16.68	-66.57	-65.27	4.92	-57.94
5	19213	50.01 PK	74	-23.99	-51.5	-55.96	4.92	-45.25
6	19213	38.25 AV	54	-15.75	-63.24	-67.78	4.92	-57.01
7	22416.9	48.28 PK	74	-25.72	-55.47	-54.41	4.92	-46.98
8	22416.9	38.39 AV	54	-15.61	-67.83	-63.03	4.92	-56.87
9	38609.24	46.54 PK	74	-27.46	-55.99	-57.43	4.92	-48.72
10	38609.24	35.87 AV	54	-18.13	-66.32	-68.63	4.92	-59.39

Note: Margin value = Emission Level - Limit value

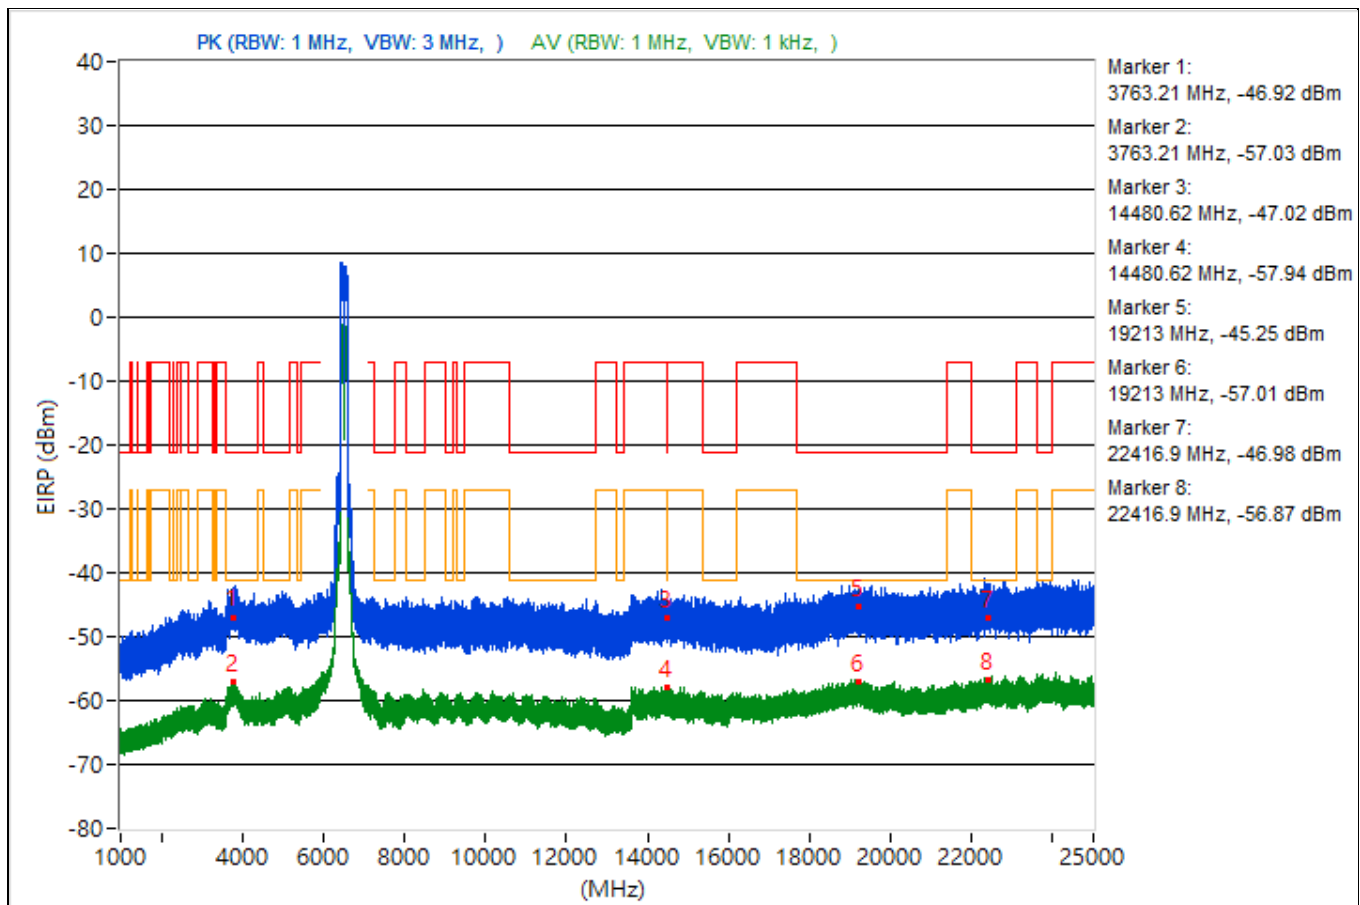


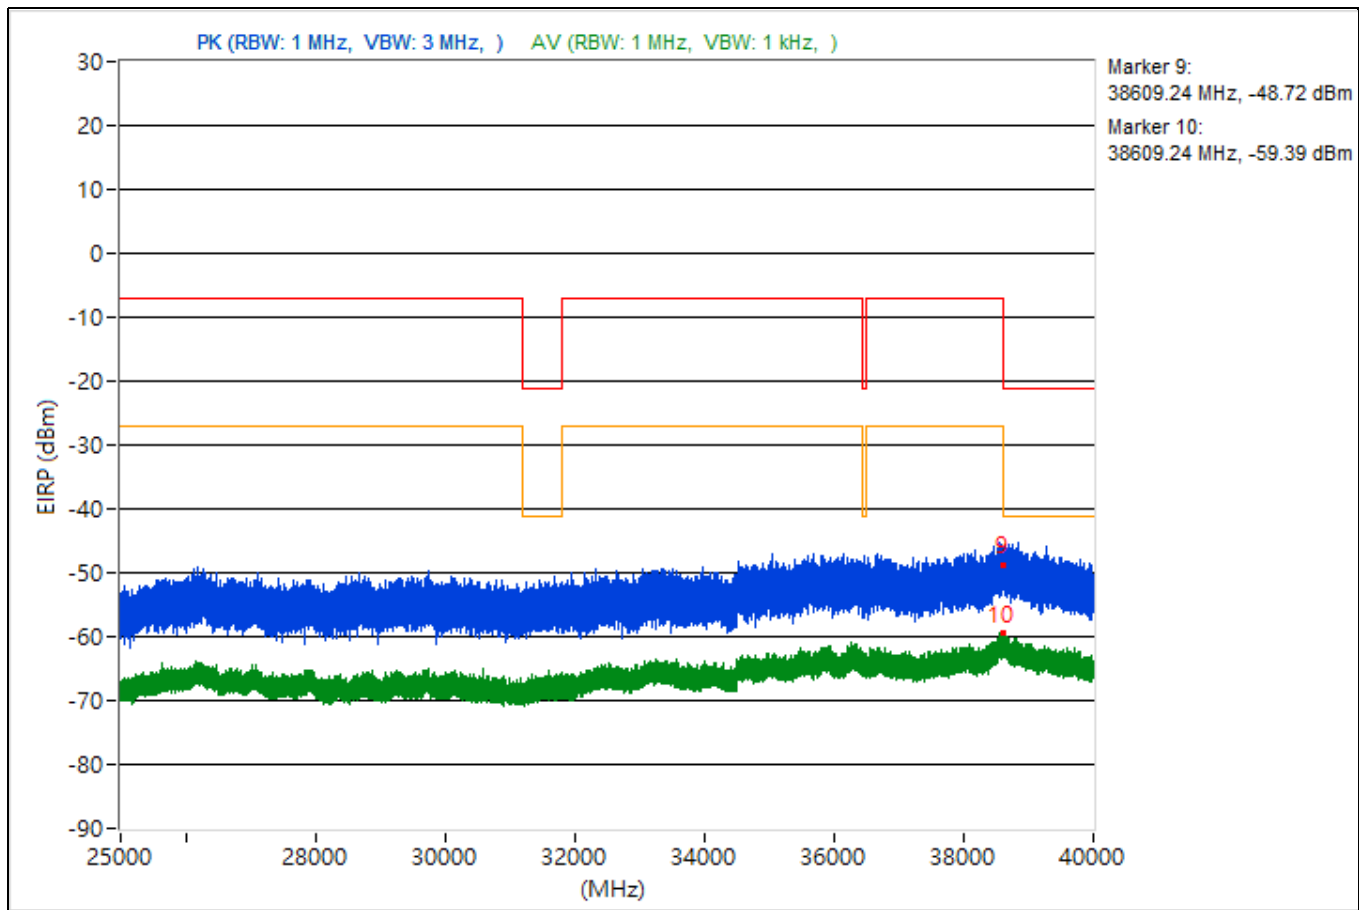


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.56	49.41 PK	74	-24.59	-54.27	-53.34	4.92	-45.85
2	3801.56	37.27 AV	54	-16.73	-64.61	-67.78	4.92	-57.99
3	14486.13	47.07 PK	74	-26.93	-56.25	-56	4.92	-48.19
4	14486.13	36.68 AV	54	-17.32	-65.21	-68.36	4.92	-58.58
5	19102.4	49.34 PK	74	-24.66	-52.78	-55.27	4.92	-45.92
6	19102.4	38.08 AV	54	-15.92	-63.63	-67.35	4.92	-57.18
7	23819.4	50.27 PK	74	-23.73	-51.56	-54.92	4.92	-44.99
8	23819.4	39.03 AV	54	-14.97	-66.02	-62.86	4.92	-56.23
9	38617.6	45.91 PK	74	-28.09	-58.87	-56.12	4.92	-49.35
10	38617.6	34.95 AV	54	-19.05	-70.09	-66.95	4.92	-60.31

Note: Margin value = Emission Level - Limit value

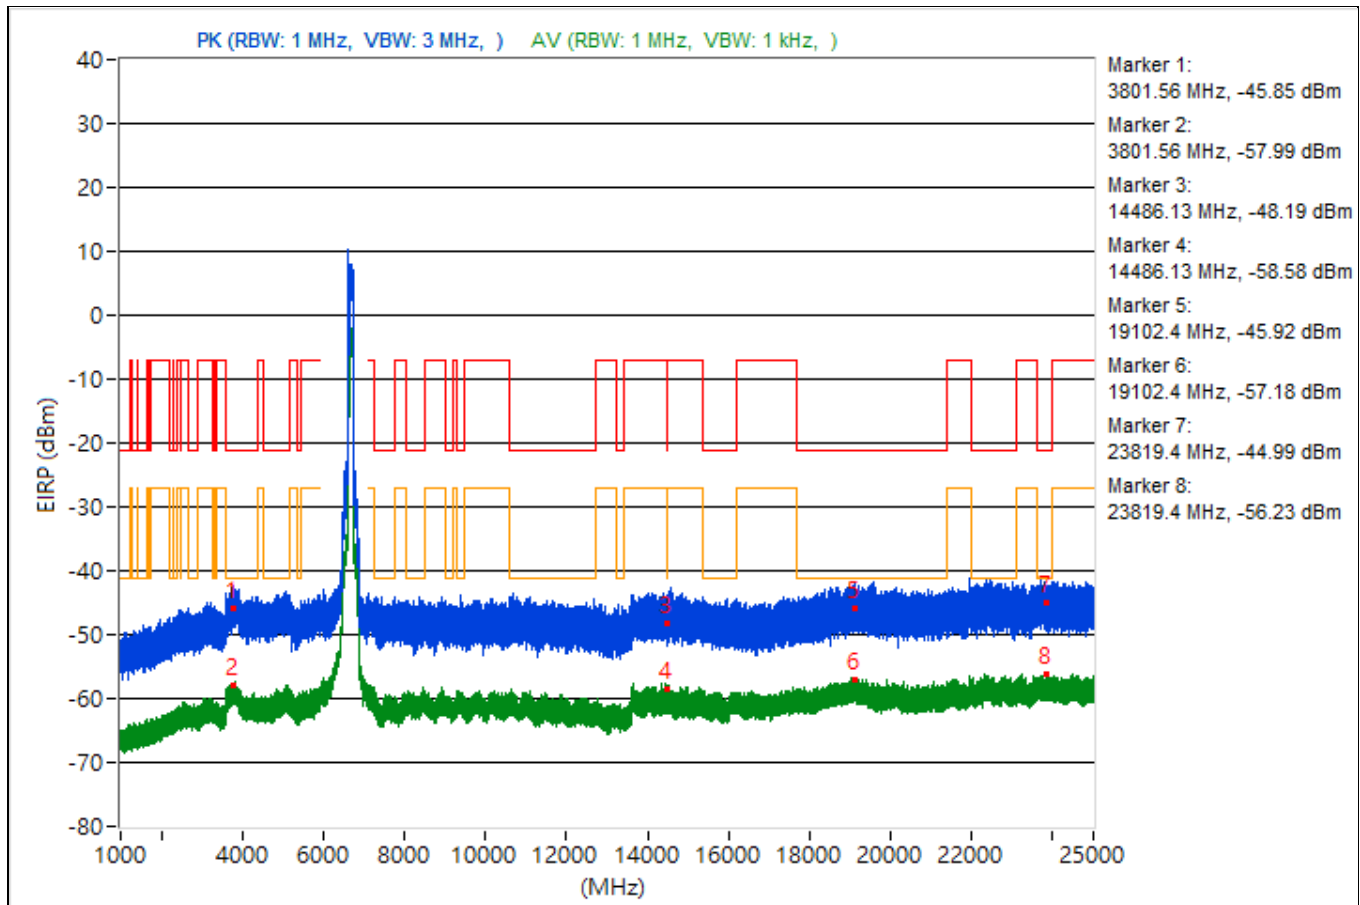


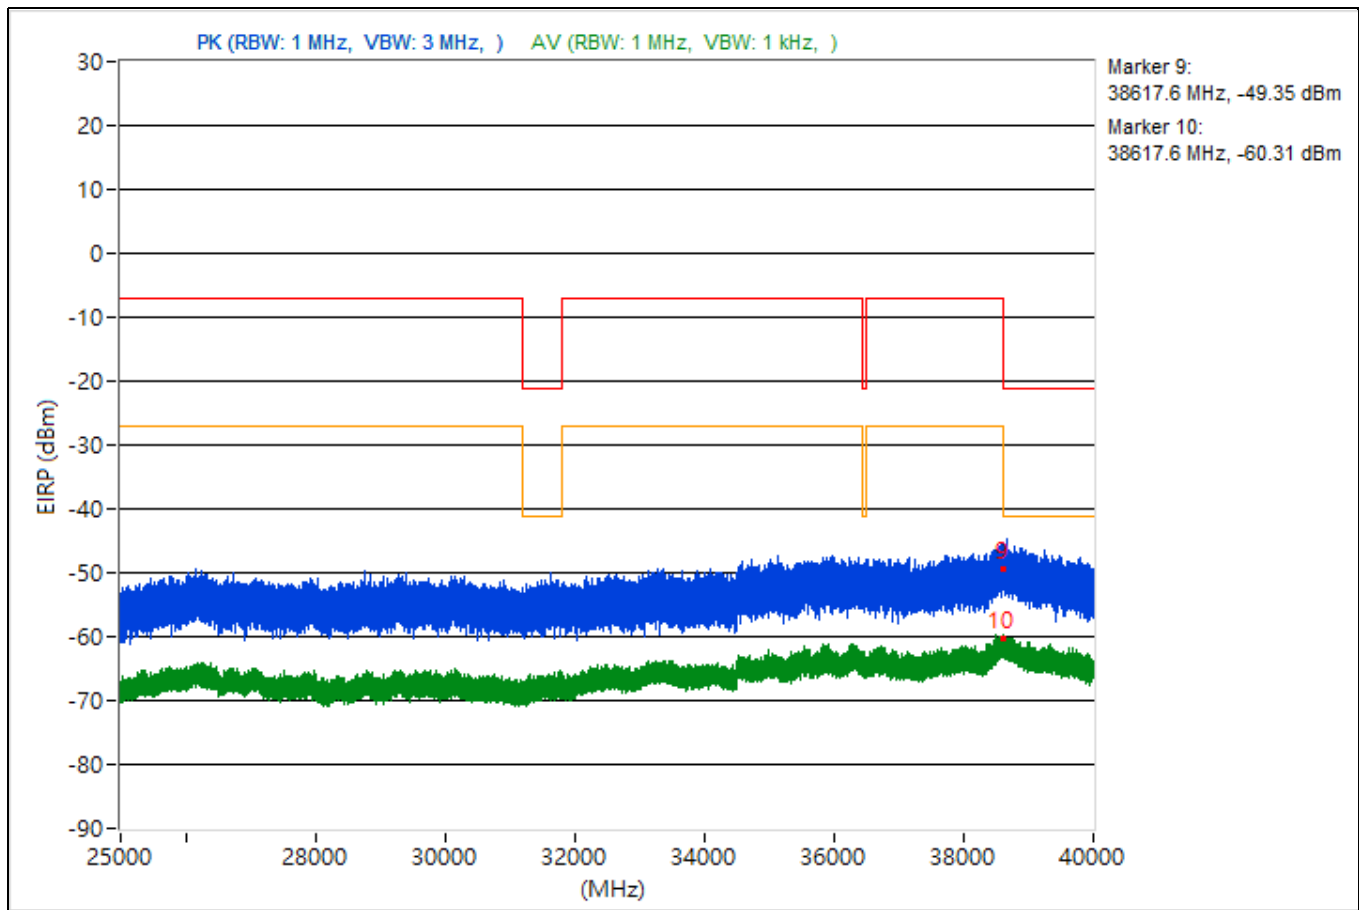


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.88	48.92 PK	74	-25.08	-55.77	-53.16	4.92	-46.34
2	3781.88	37.71 AV	54	-16.29	-67.75	-63.99	4.92	-57.55
3	7260.96	47.21 PK	74	-26.79	-55.58	-56.42	4.92	-48.05
4	7260.96	37.97 AV	54	-16.03	-66.5	-64.23	4.92	-57.29
5	19348.7	49.68 PK	74	-24.32	-55.42	-52.19	4.92	-45.58
6	19348.7	37.9 AV	54	-16.1	-68.4	-63.5	4.92	-57.36
7	22808	48.47 PK	74	-25.53	-53.73	-56.01	4.92	-46.79
8	22808	39 AV	54	-15	-63.02	-65.81	4.92	-56.26
9	38634.4	44.79 PK	74	-29.21	-59.1	-57.8	4.92	-50.47
10	38634.4	35.32 AV	54	-18.68	-70.28	-66.33	4.92	-59.94

Note: Margin value = Emission Level - Limit value

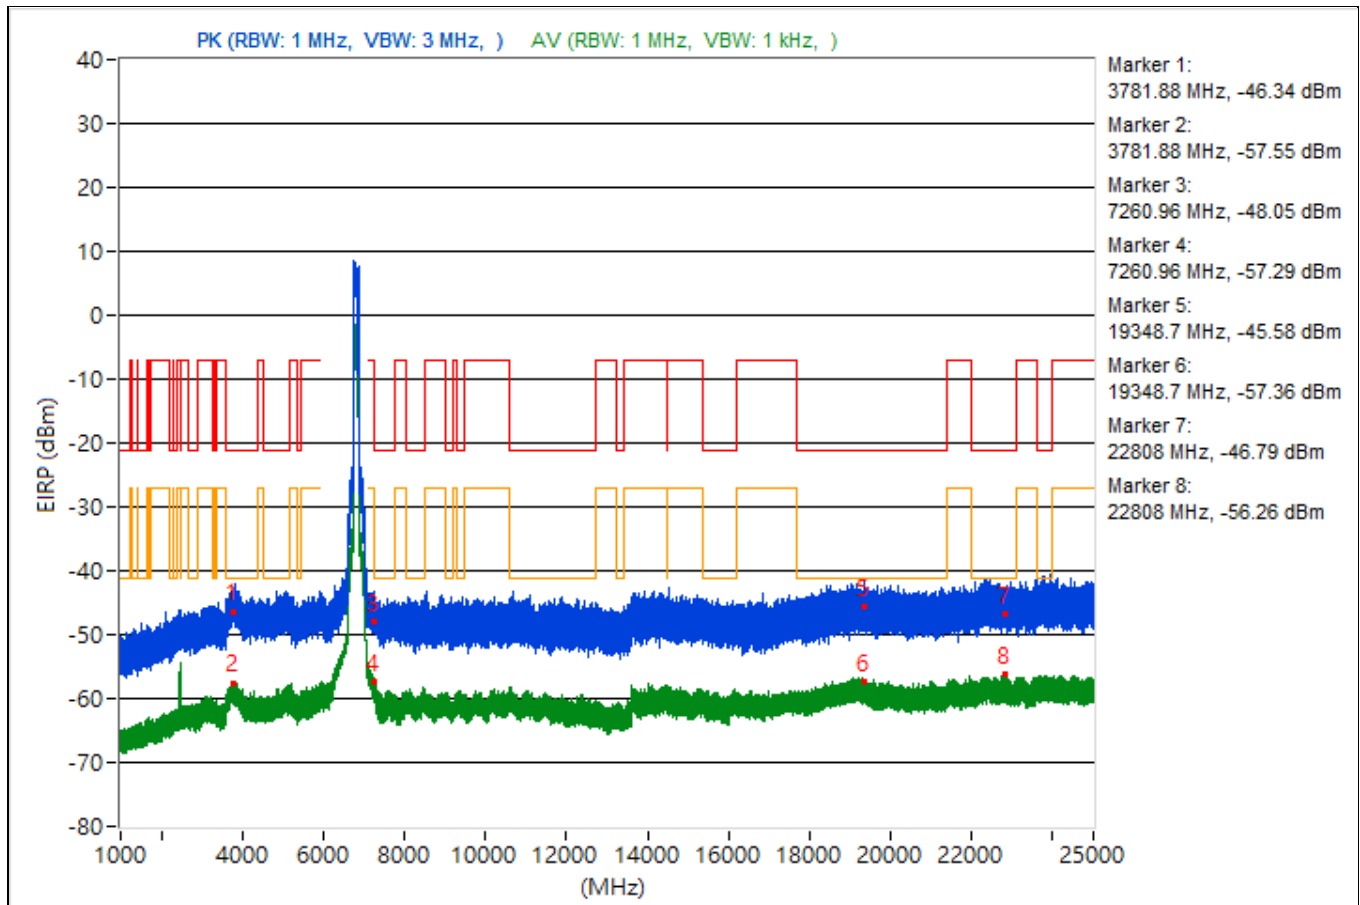


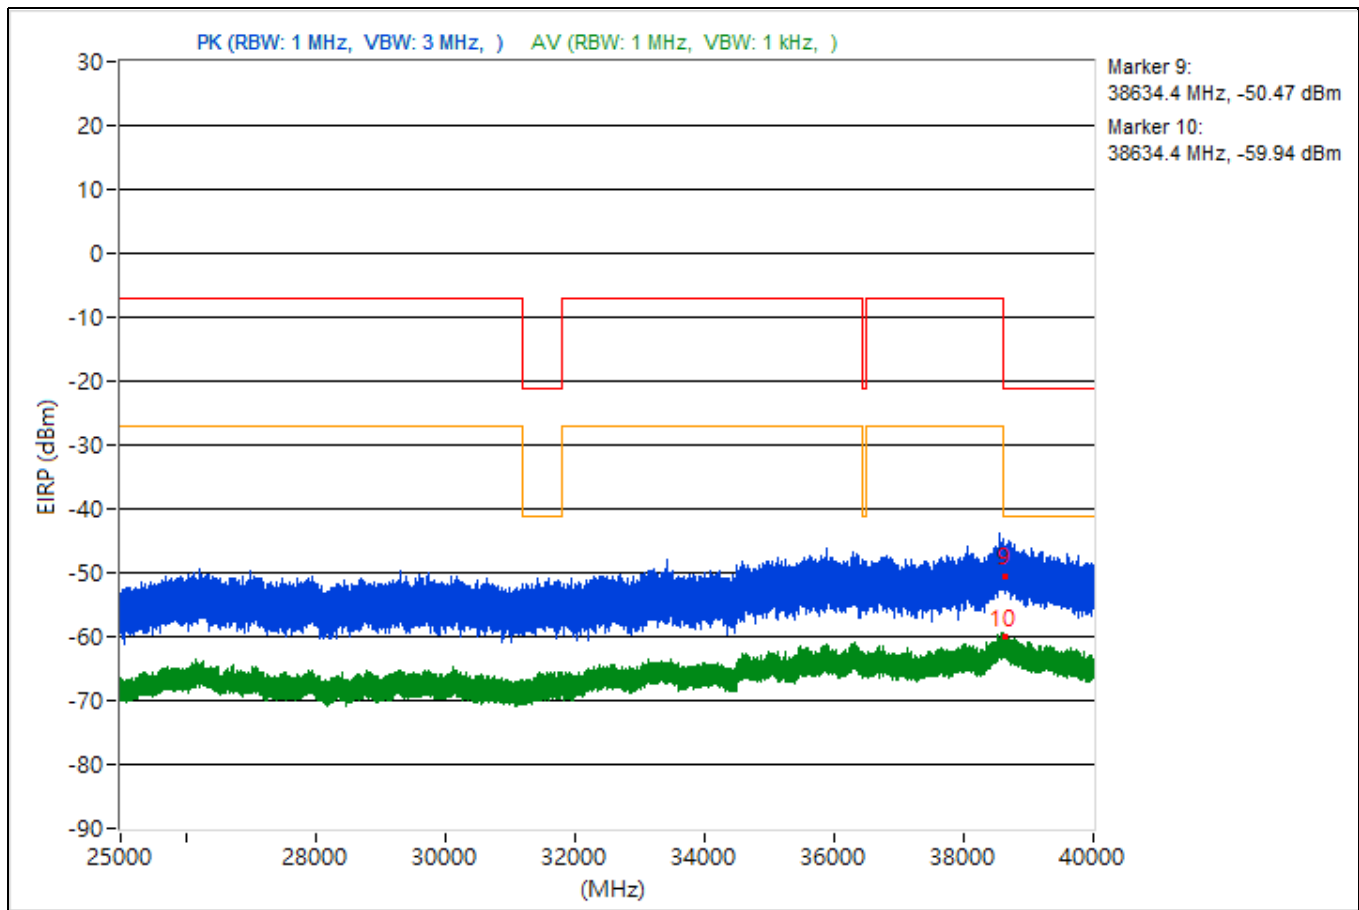


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.11	48.58 PK	74	-25.42	-52.92	-57.44	4.92	-46.68
2	3789.11	37.4 AV	54	-16.6	-67.17	-64.74	4.92	-57.86
3	7250.07	47.86 PK	74	-26.14	-54.14	-56.99	4.92	-47.4
4	7250.07	39.5 AV	54	-14.5	-63.05	-64.45	4.92	-55.76
5	18972.1	49.1 PK	74	-24.9	-53.67	-54.56	4.92	-46.16
6	18972.1	38.27 AV	54	-15.73	-63.71	-66.61	4.92	-56.99
7	22299.2	49.45 PK	74	-24.55	-52.67	-55.17	4.92	-45.81
8	22299.2	38.86 AV	54	-15.14	-66.1	-63.07	4.92	-56.4
9	38609.51	46.61 PK	74	-27.39	-58.84	-55.1	4.92	-48.65
10	38609.51	35.43 AV	54	-18.57	-66.68	-69.22	4.92	-59.83

Note: Margin value = Emission Level - Limit value

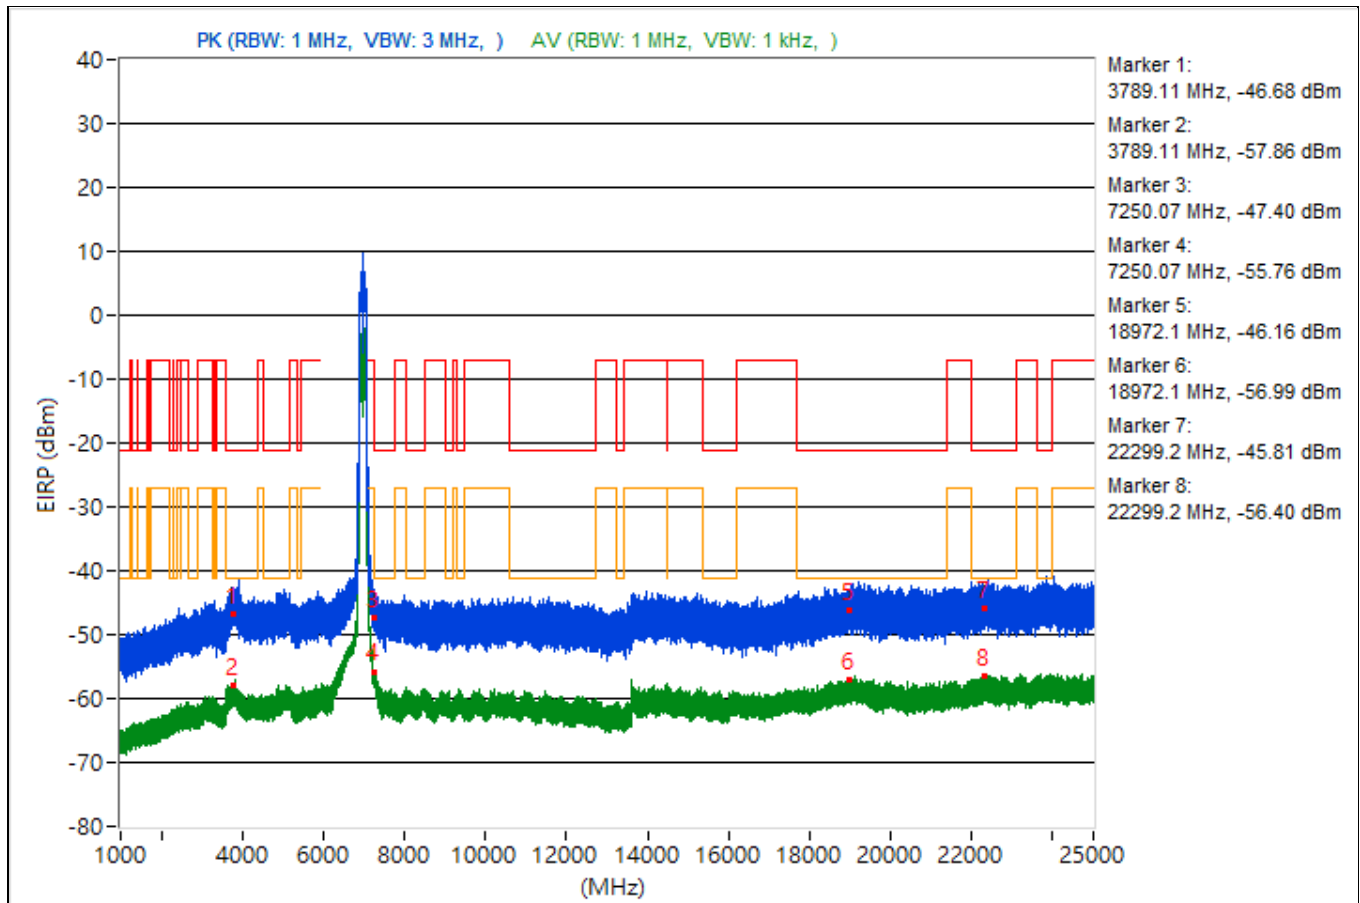


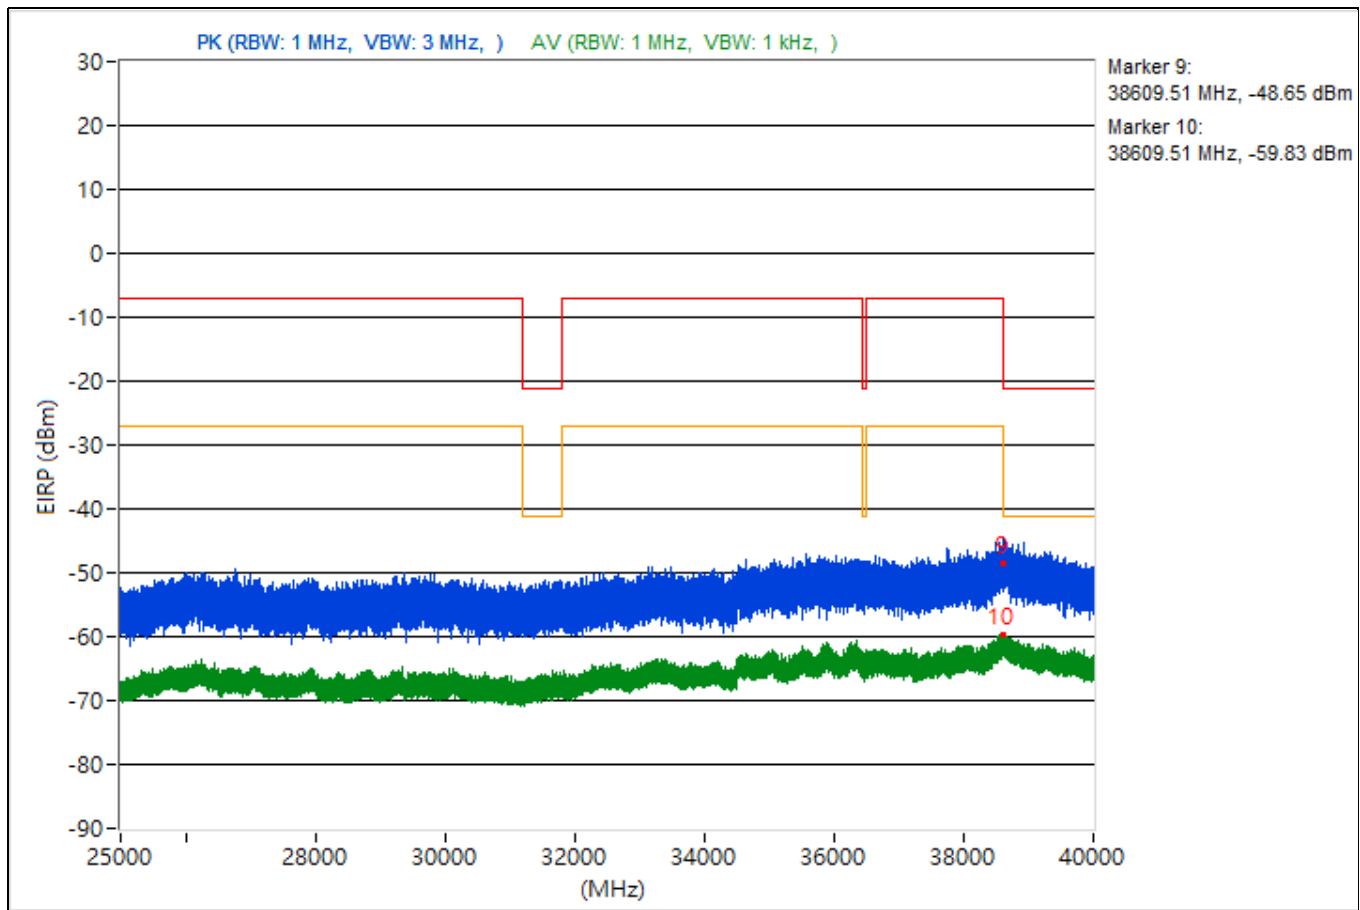


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3752.24	49.87 PK	74	-24.13	-55	-52.12	4.92	-45.39
2	3752.24	39.81 AV	54	-14.19	-63.31	-63.46	4.92	-55.45
3	14480.71	48.78 PK	74	-25.22	-54.89	-53.98	4.92	-46.48
4	14480.71	38.35 AV	54	-15.65	-65.53	-64.25	4.92	-56.91
5	18966.4	49.78 PK	74	-24.22	-51.4	-57.29	4.92	-45.48
6	18966.4	39.4 AV	54	-14.6	-62.87	-64.97	4.92	-55.86
7	23662.8	49.53 PK	74	-24.47	-52.07	-56.21	4.92	-45.73
8	23662.8	40.3 AV	54	-13.7	-63.79	-62.14	4.92	-54.96
9	38600.71	46.41 PK	74	-27.59	-55.75	-58.12	4.92	-48.85
10	38600.71	36.33 AV	54	-17.67	-69.49	-65.23	4.92	-58.93

Note: Margin value = Emission Level - Limit value

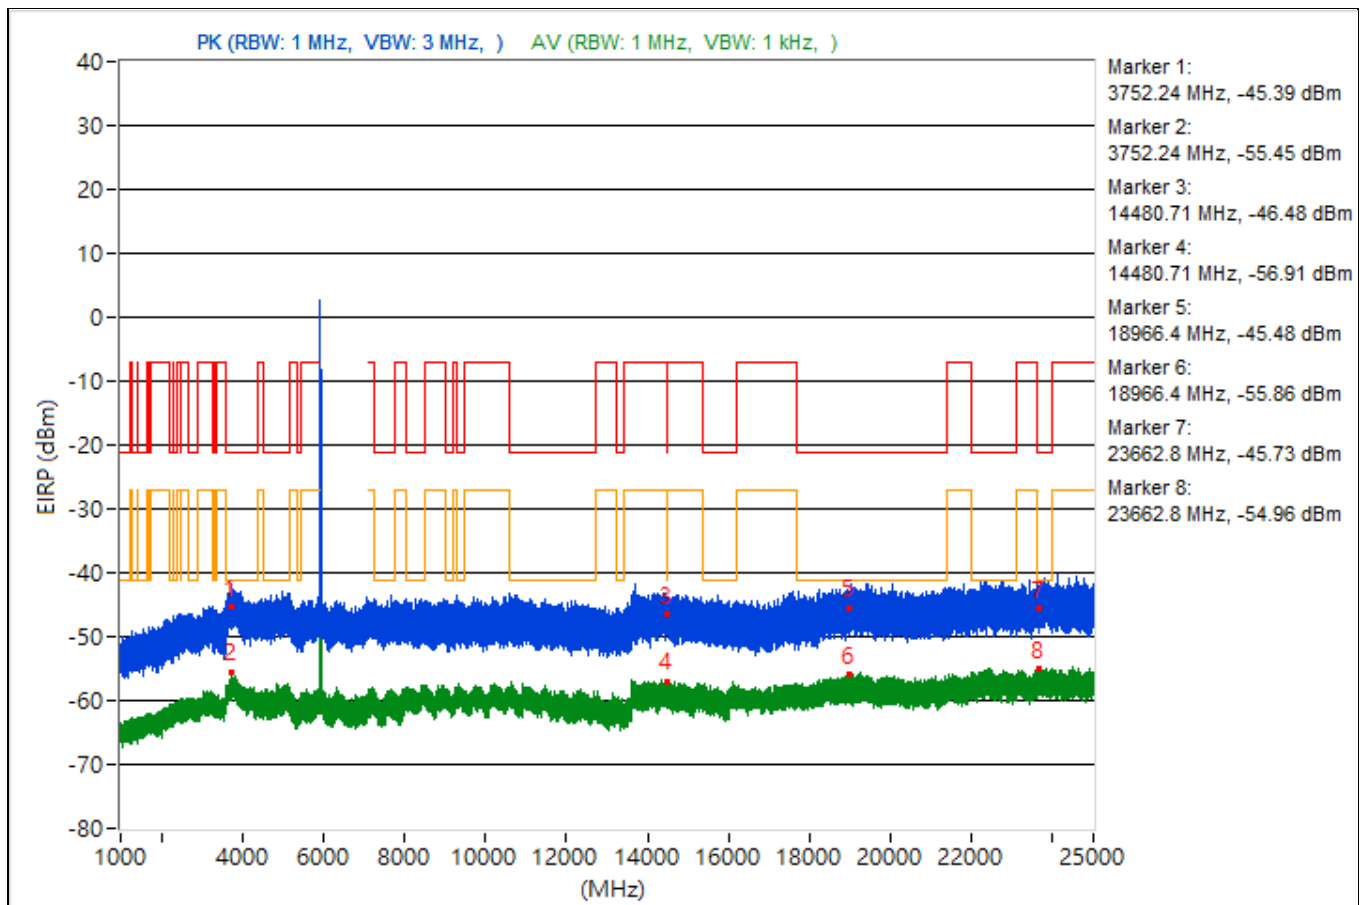


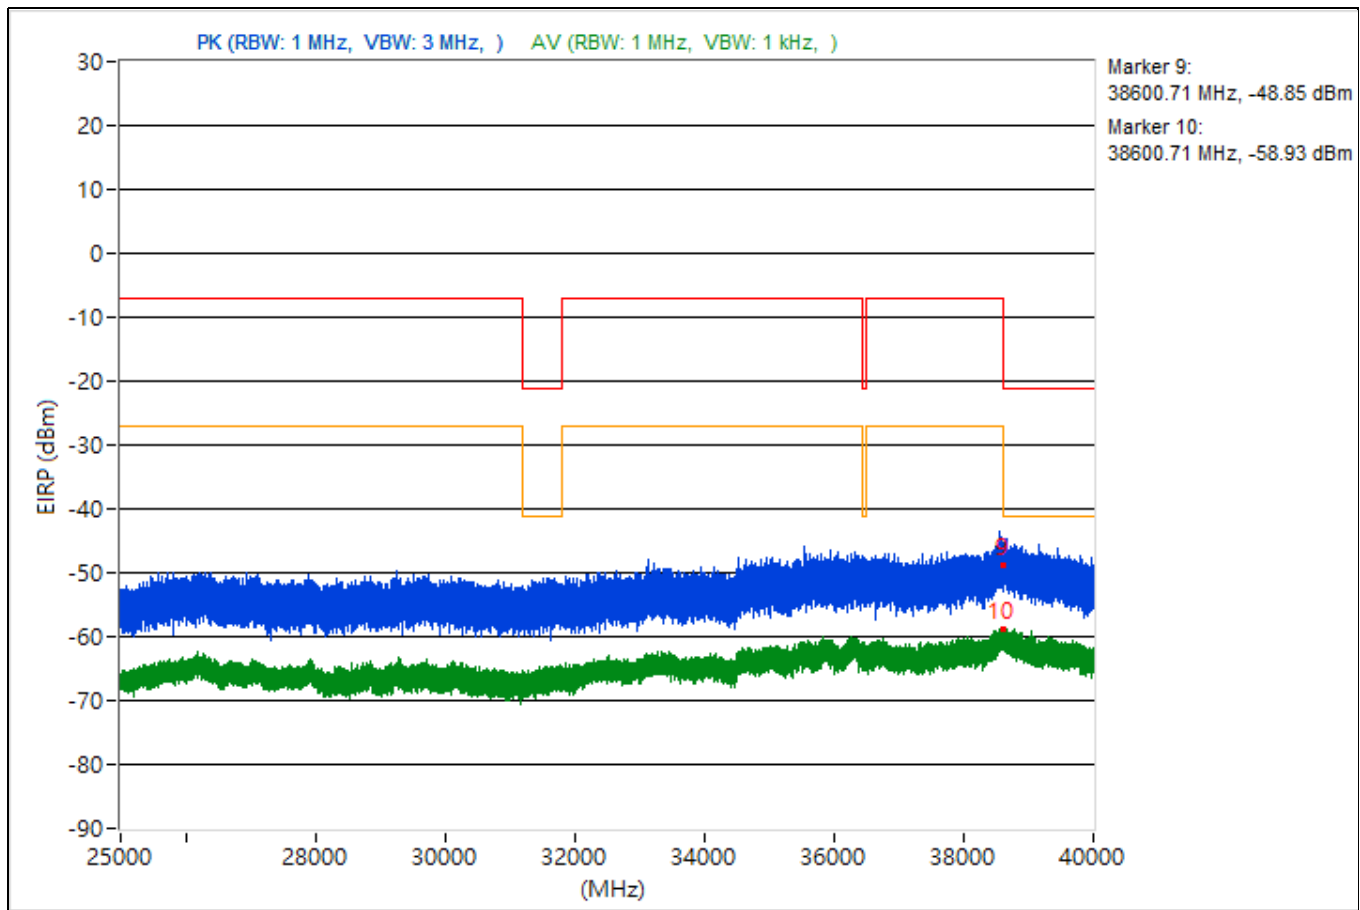


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.53	50.28 PK	74	-23.72	-52.79	-53.03	4.92	-44.98
2	3757.53	39.17 AV	54	-14.83	-63.11	-65.18	4.92	-56.09
3	15369.87	47.83 PK	74	-26.17	-56	-54.79	4.92	-47.43
4	15369.87	37.93 AV	54	-16.07	-64.5	-66.17	4.92	-57.33
5	19443.1	49.36 PK	74	-24.64	-55.22	-52.77	4.92	-45.9
6	19443.1	39.39 AV	54	-14.61	-62.49	-65.68	4.92	-55.87
7	23720.5	49.53 PK	74	-24.47	-55.17	-52.54	4.92	-45.73
8	23720.5	40.64 AV	54	-13.36	-63.42	-61.83	4.92	-54.62
9	38649.96	44.36 PK	74	-29.64	-58.85	-58.82	4.92	-50.9
10	38649.96	36.29 AV	54	-17.71	-65.69	-68.57	4.92	-58.97

Note: Margin value = Emission Level - Limit value

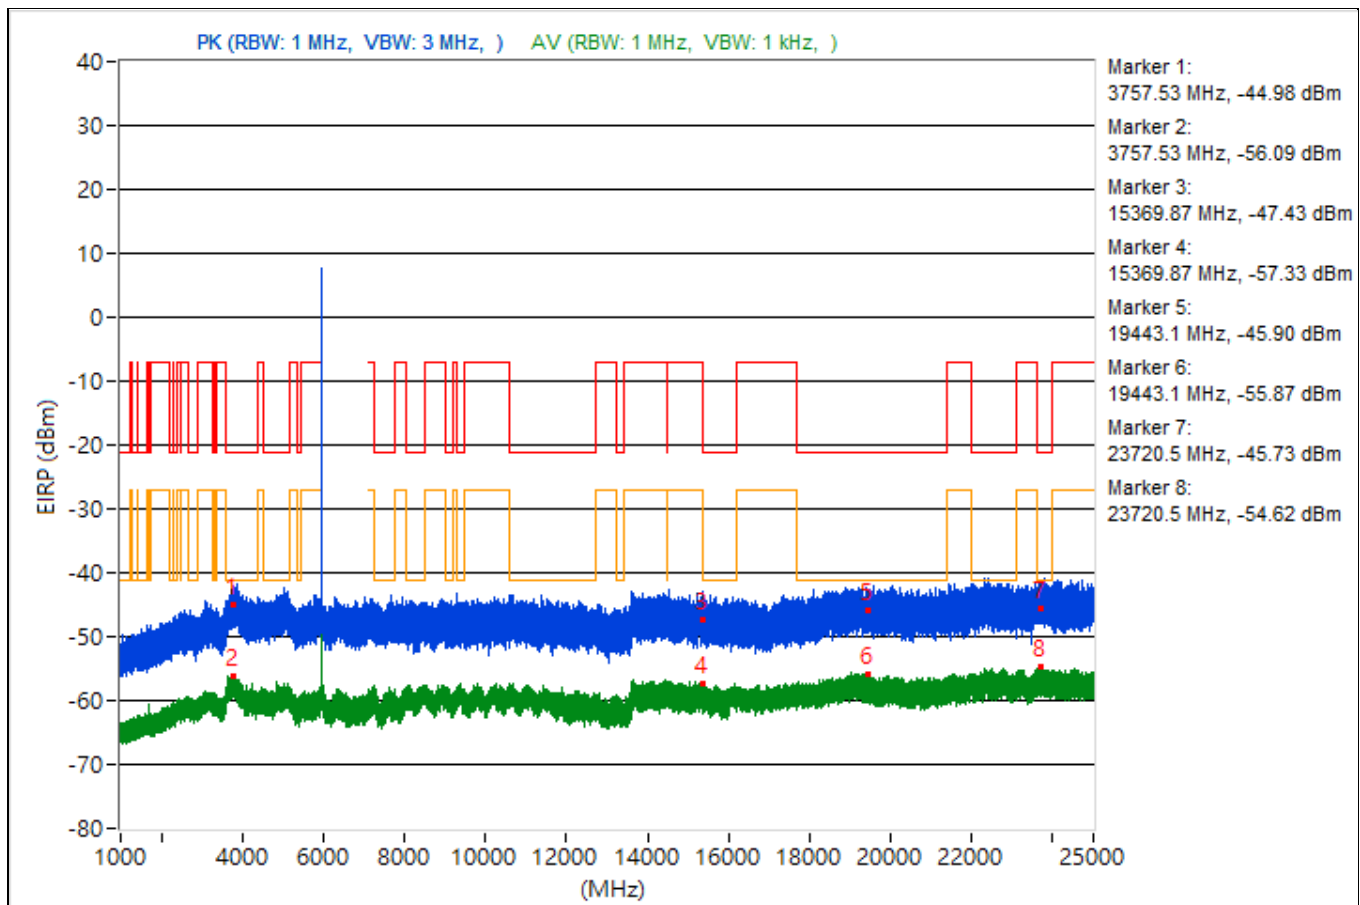


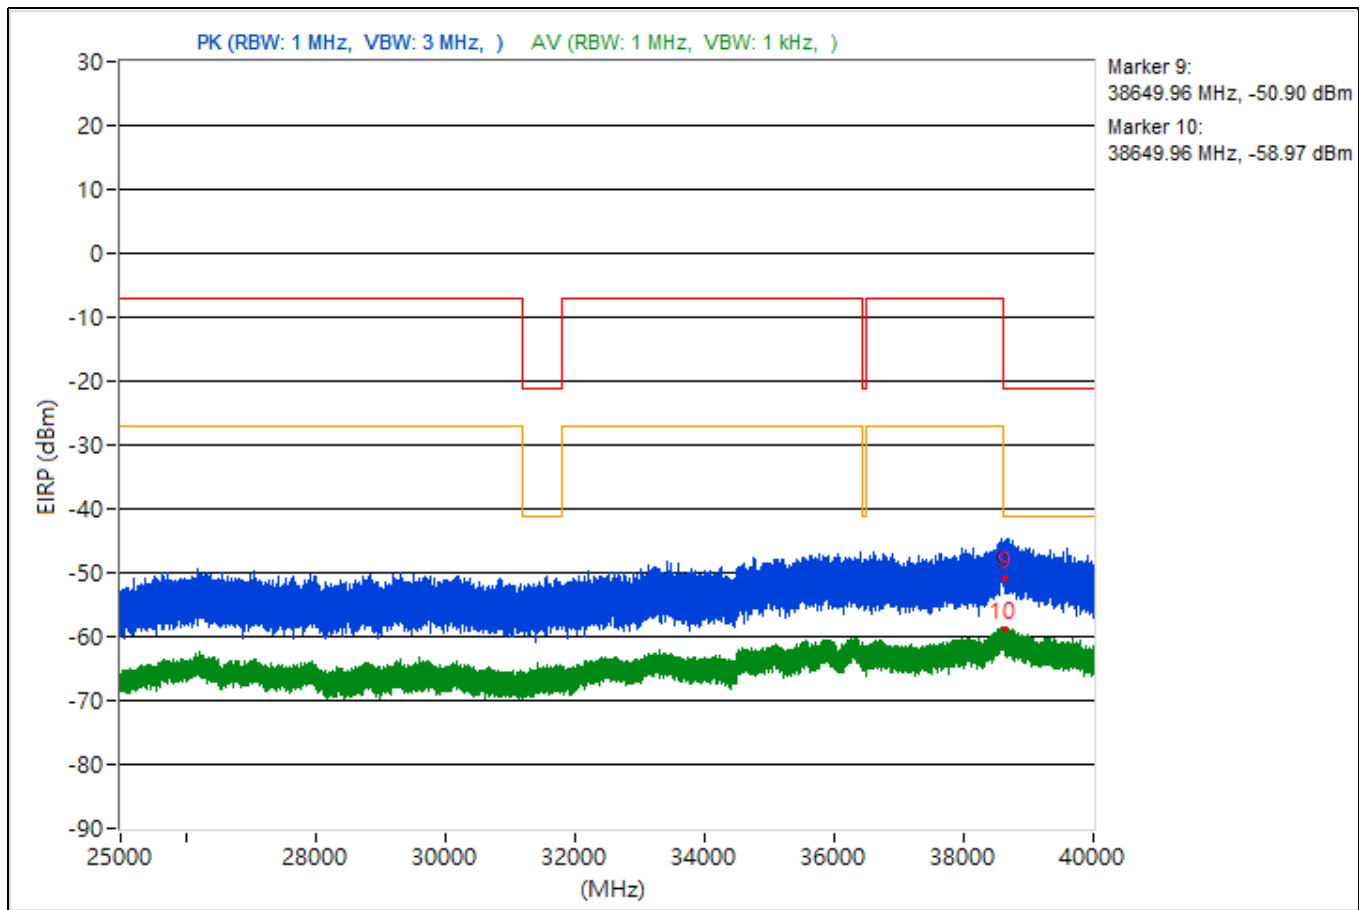


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3716.93	49.42 PK	74	-24.58	-53.29	-54.31	4.92	-45.84
2	3716.93	39.24 AV	54	-14.76	-64.95	-63.14	4.92	-56.02
3	14495.56	48.97 PK	74	-25.03	-54.81	-53.7	4.92	-46.29
4	14495.56	38.27 AV	54	-15.73	-65.44	-64.45	4.92	-56.99
5	19089.1	48.11 PK	74	-25.89	-54.91	-55.26	4.92	-47.15
6	19089.1	39.37 AV	54	-14.63	-65.93	-62.41	4.92	-55.89
7	22428.8	47.94 PK	74	-26.06	-55.42	-55.08	4.92	-47.32
8	22428.8	39.99 AV	54	-14.01	-61.68	-65.56	4.92	-55.27
9	38626.04	44.17 PK	74	-29.83	-59.99	-58.23	4.92	-51.09
10	38626.04	36.91 AV	54	-17.09	-65.51	-67.22	4.92	-58.35

Note: Margin value = Emission Level - Limit value

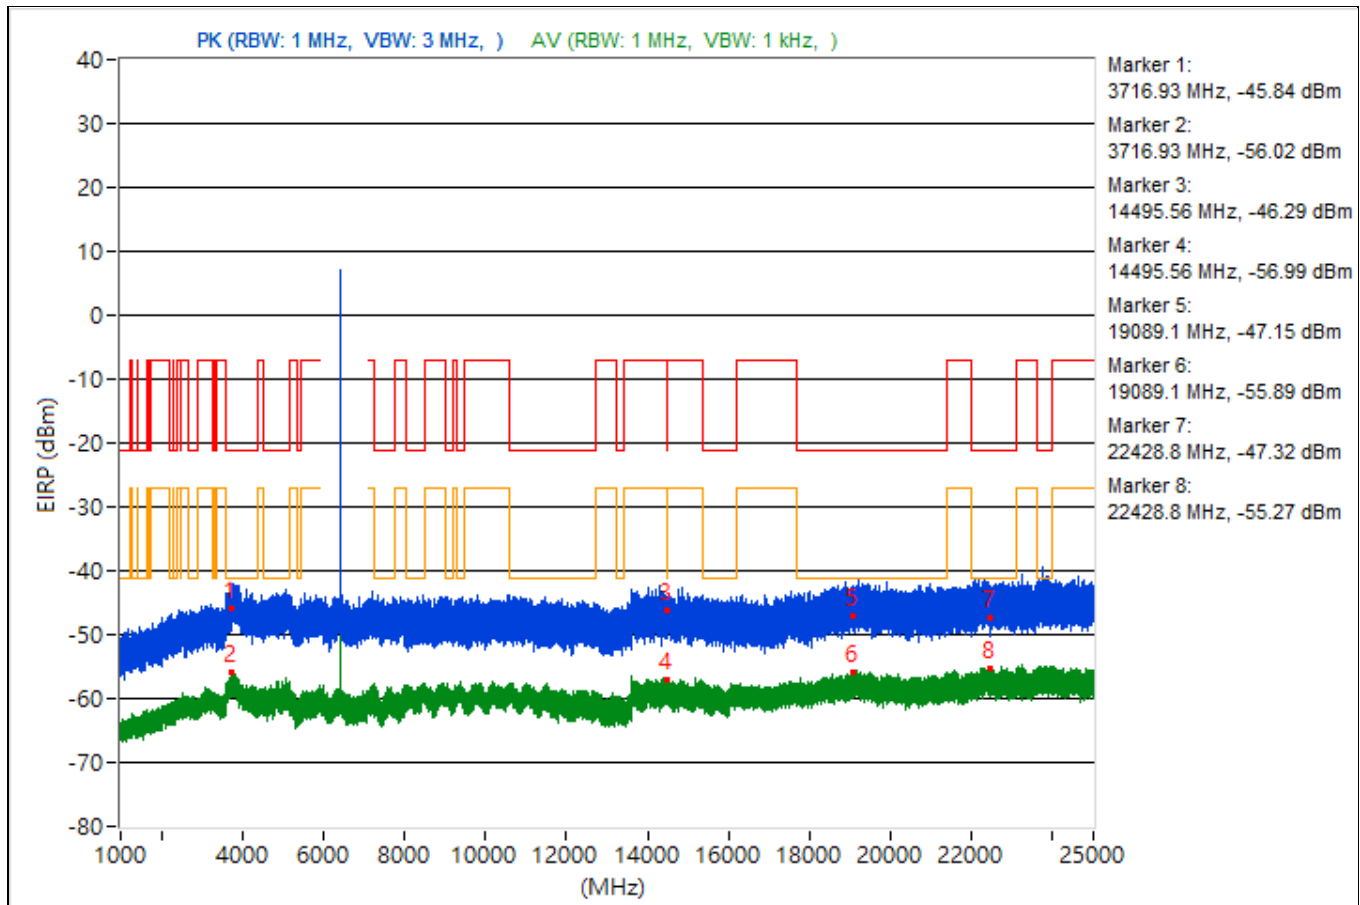


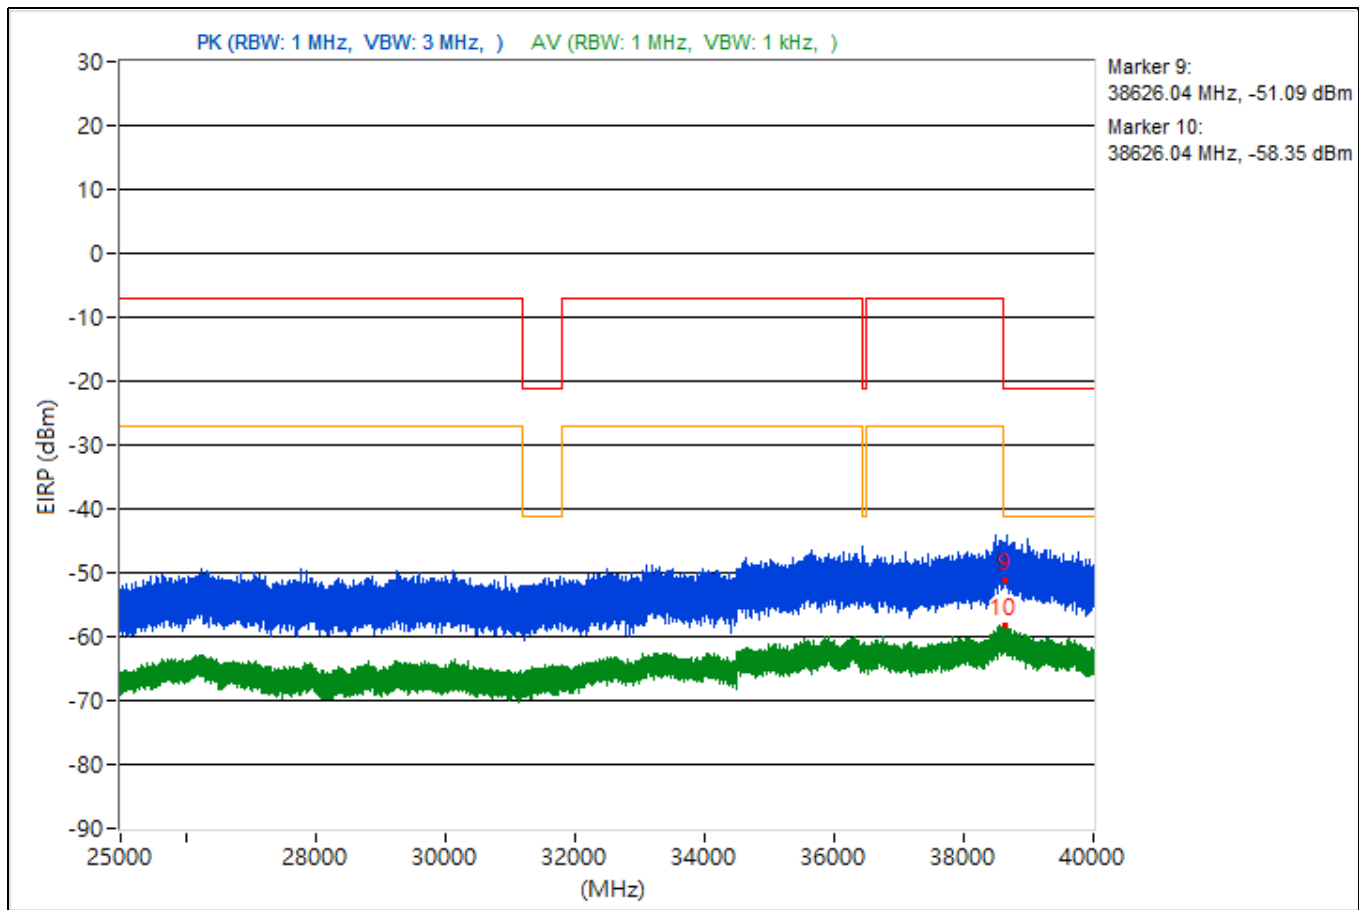


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3858.26	50.86 PK	74	-23.14	-52.44	-52.23	4.92	-44.4
2	3858.26	38.4 AV	54	-15.6	-63.12	-67.55	4.92	-56.86
3	14488.18	47.1 PK	74	-26.9	-56.1	-56.08	4.92	-48.16
4	14488.18	37.77 AV	54	-16.23	-64.39	-66.76	4.92	-57.49
5	19143.8	51 PK	74	-23	-51.69	-52.75	4.92	-44.26
6	19143.8	39.74 AV	54	-14.26	-64.2	-62.82	4.92	-55.52
7	22353.9	52.04 PK	74	-21.96	-49.17	-54.87	4.92	-43.22
8	22353.9	40.26 AV	54	-13.74	-63.94	-62.12	4.92	-55
9	38667.56	47.23 PK	74	-26.77	-53.69	-61.01	4.92	-48.03
10	38667.56	36.72 AV	54	-17.28	-65.16	-68.35	4.92	-58.54

Note: Margin value = Emission Level - Limit value

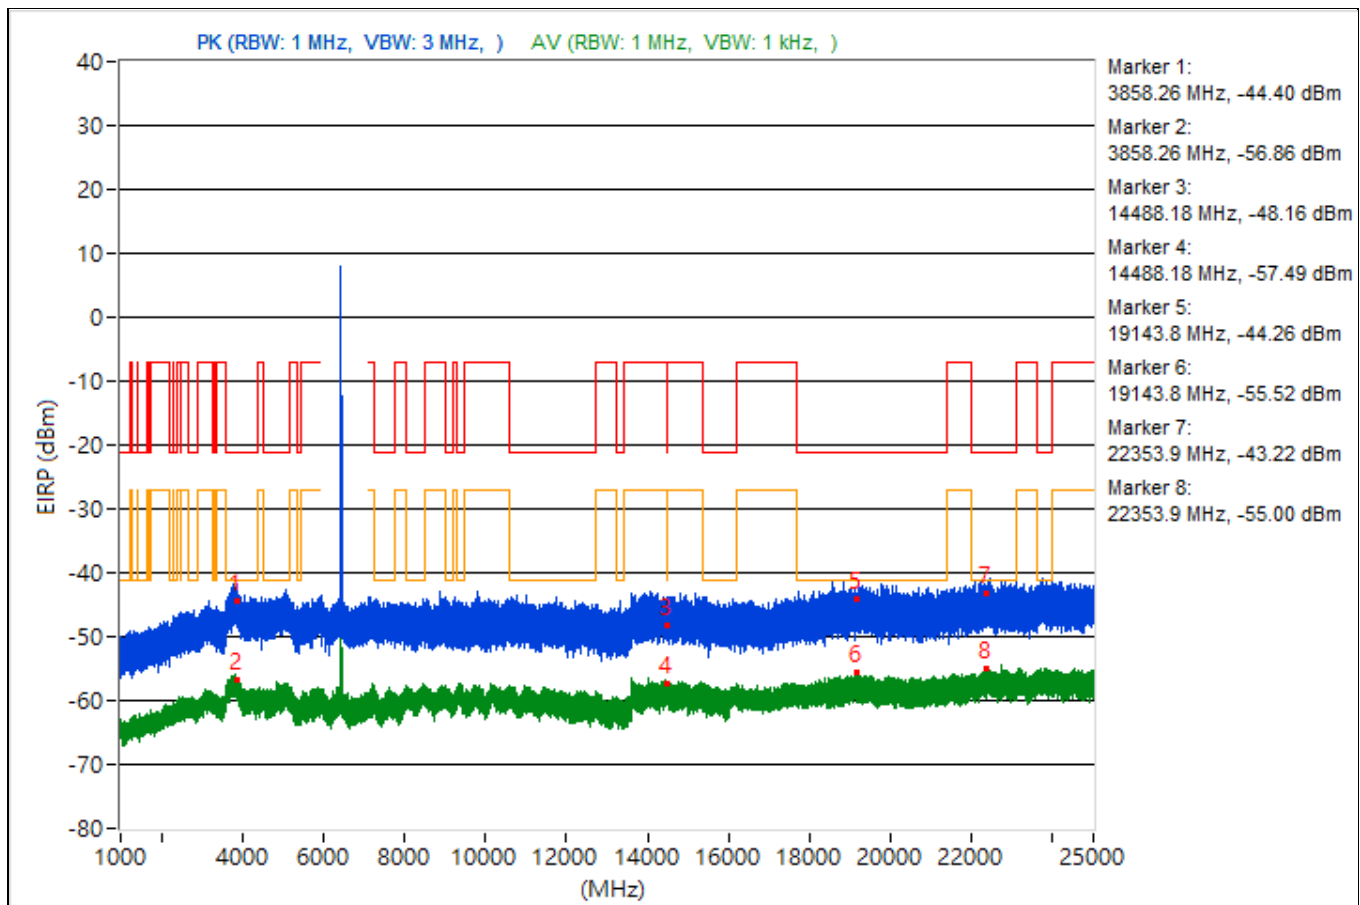


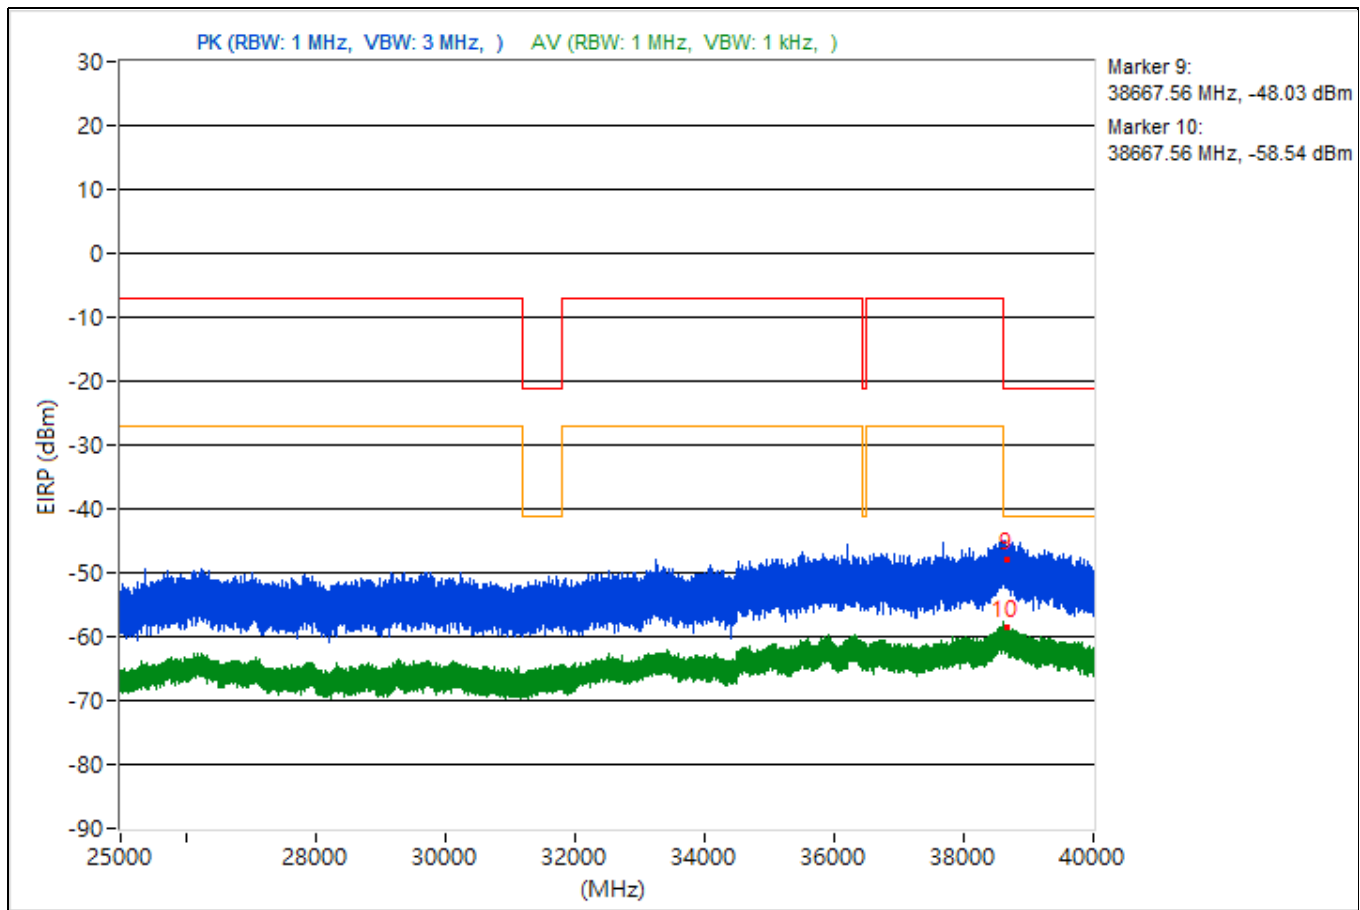


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.74	50.11 PK	74	-23.89	-53.71	-52.53	4.92	-45.15
2	3825.74	38.58 AV	54	-15.42	-63.56	-65.99	4.92	-56.68
3	14492.18	49.07 PK	74	-24.93	-54.31	-53.94	4.92	-46.19
4	14492.18	38.52 AV	54	-15.48	-65.24	-64.16	4.92	-56.74
5	19253.9	49.75 PK	74	-24.25	-55.03	-52.29	4.92	-45.51
6	19253.9	39.12 AV	54	-14.88	-65.67	-62.91	4.92	-56.14
7	23705.7	49.37 PK	74	-24.63	-55.05	-52.86	4.92	-45.89
8	23705.7	40 AV	54	-14	-64.93	-61.95	4.92	-55.26
9	38677.6	45.91 PK	74	-28.09	-56.62	-58.07	4.92	-49.35
10	38677.6	36.51 AV	54	-17.49	-68.13	-65.59	4.92	-58.75

Note: Margin value = Emission Level - Limit value

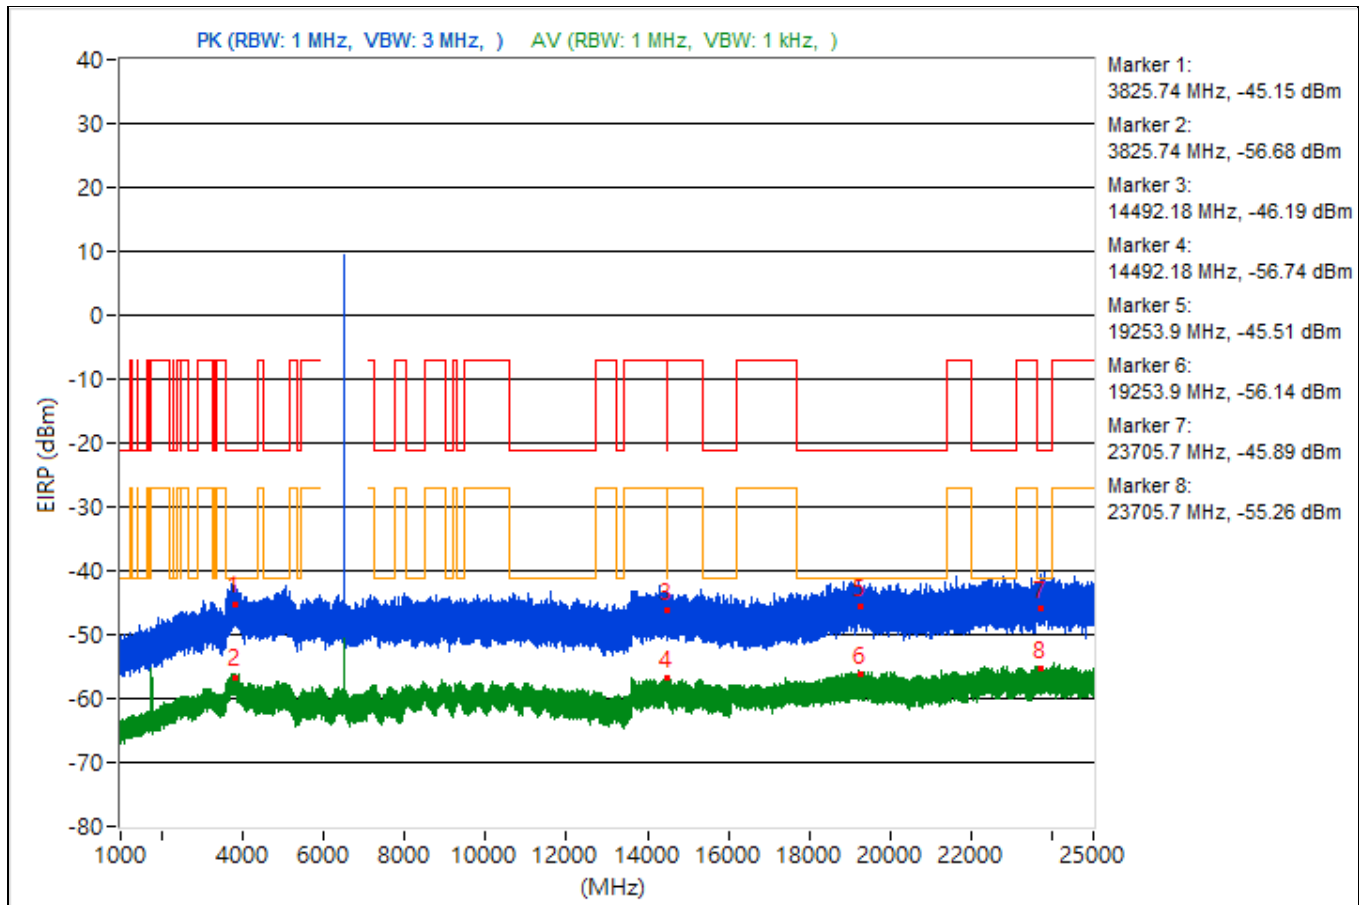


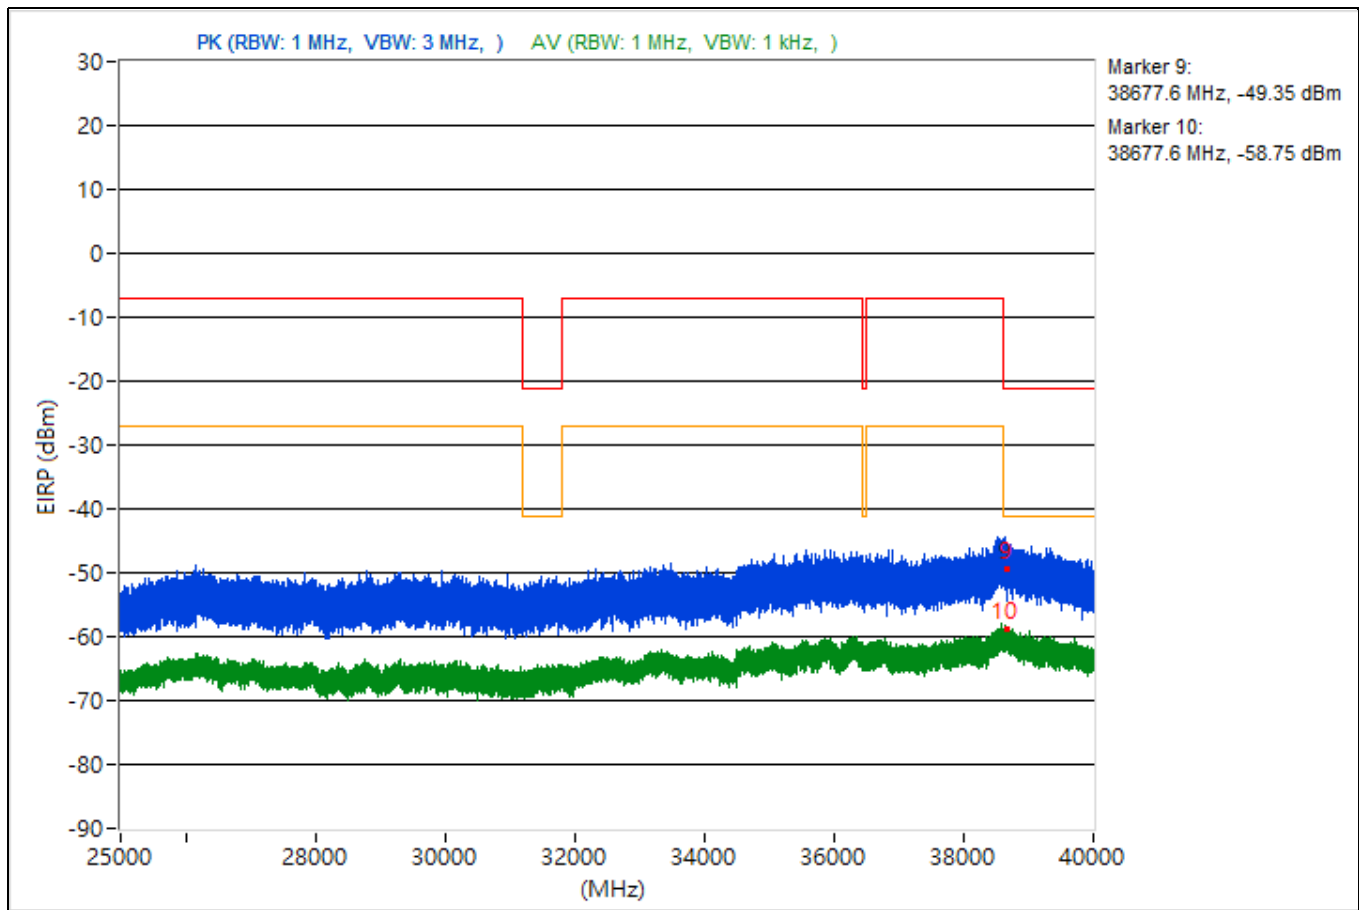


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.66	51.66 PK	74	-22.34	-53.31	-50.28	4.92	-43.6
2	3803.66	39.51 AV	54	-14.49	-62.64	-65.04	4.92	-55.75
3	10659.02	46.4 PK	74	-27.6	-59.12	-55.28	4.92	-48.86
4	10659.02	38.52 AV	54	-15.48	-64.31	-65.06	4.92	-56.74
5	19100.1	51.13 PK	74	-22.87	-51.34	-52.93	4.92	-44.13
6	19100.1	39.43 AV	54	-14.57	-65.25	-62.66	4.92	-55.83
7	23624.8	51.16 PK	74	-22.84	-50.76	-53.83	4.92	-44.1
8	23624.8	40.42 AV	54	-13.58	-62.05	-63.62	4.92	-54.84
9	38604.18	49.98 PK	74	-24.02	-53.51	-52.93	4.92	-45.28
10	38604.18	36.9 AV	54	-17.1	-67.29	-65.48	4.92	-58.36

Note: Margin value = Emission Level - Limit value

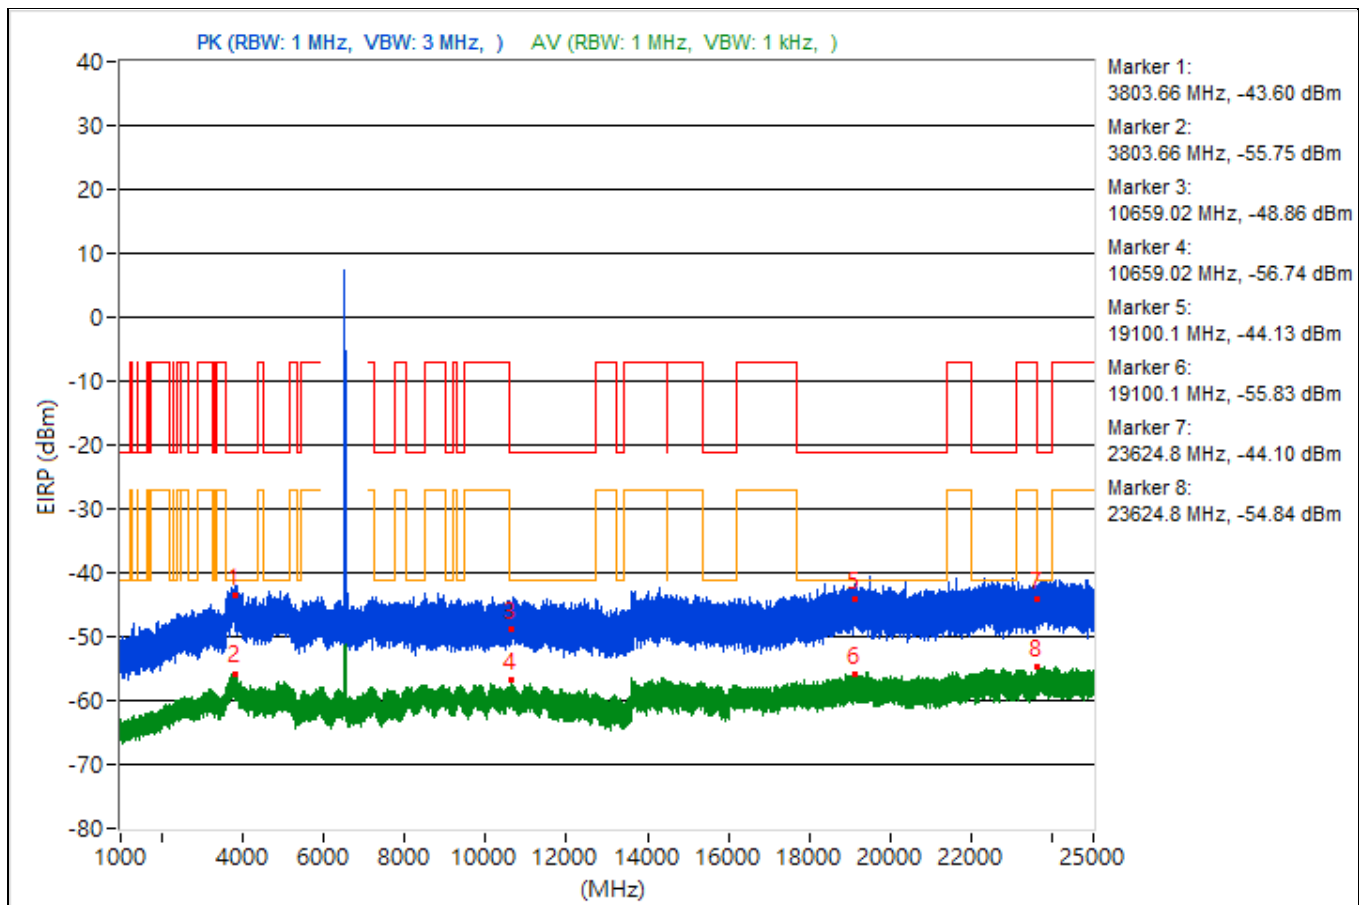


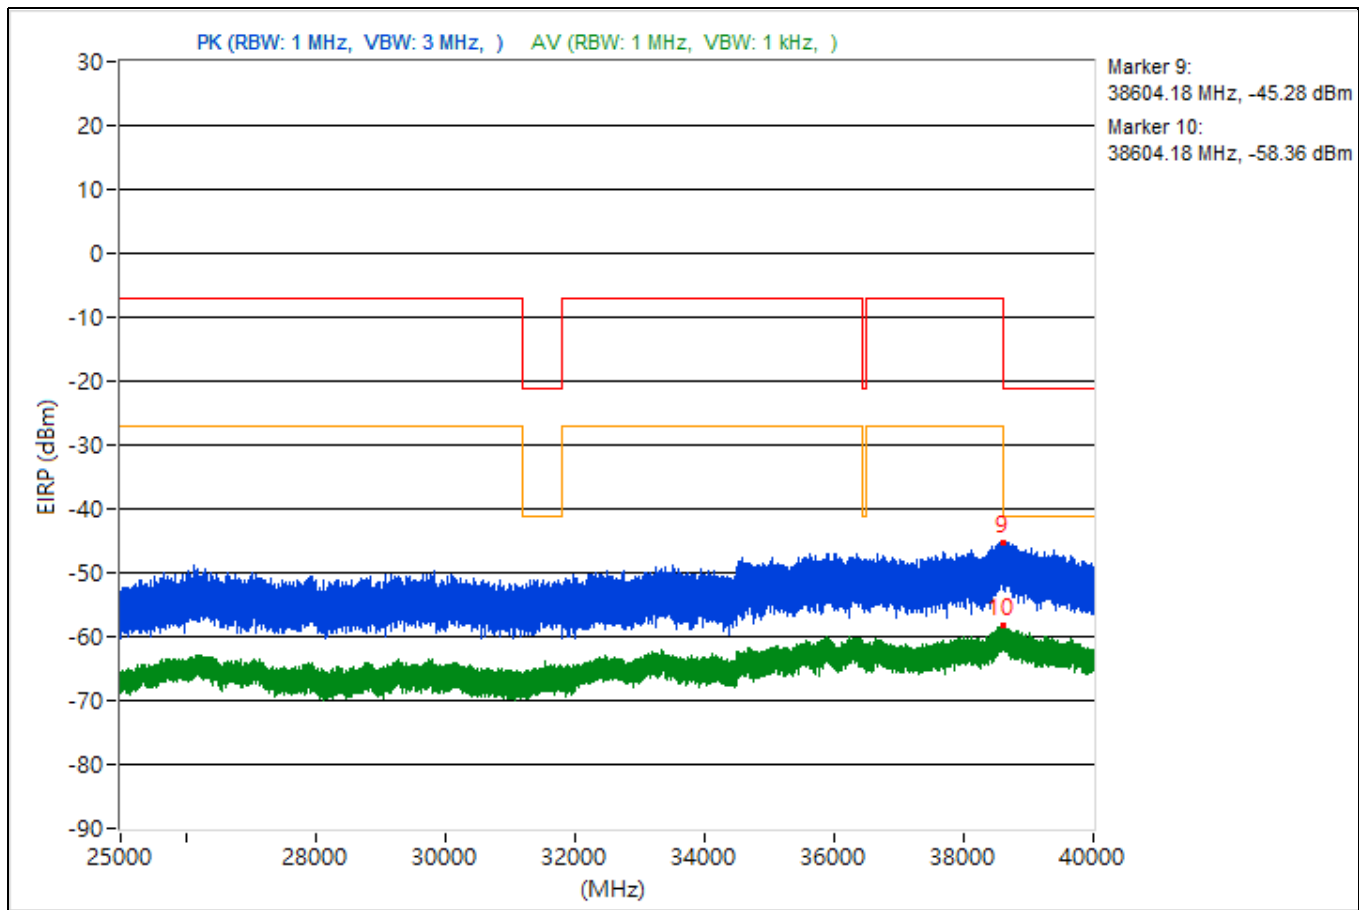


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.83	50.56 PK	74	-23.44	-52.03	-53.32	4.92	-44.7
2	3819.83	38.93 AV	54	-15.07	-63.38	-65.38	4.92	-56.33
3	14491.2	48.99 PK	74	-25.01	-55.22	-53.37	4.92	-46.27
4	14491.2	38.02 AV	54	-15.98	-66.66	-64.06	4.92	-57.24
5	18964.7	48.67 PK	74	-25.33	-54.38	-54.67	4.92	-46.59
6	18964.7	39.51 AV	54	-14.49	-62.91	-64.62	4.92	-55.75
7	23725.5	50.2 PK	74	-23.8	-53.89	-52.26	4.92	-45.06
8	23725.5	39.96 AV	54	-14.04	-62.28	-64.46	4.92	-55.3
9	38612.62	47.61 PK	74	-26.39	-56.16	-55.07	4.92	-47.65
10	38612.62	37.09 AV	54	-16.91	-67.46	-65.06	4.92	-58.17

Note: Margin value = Emission Level - Limit value

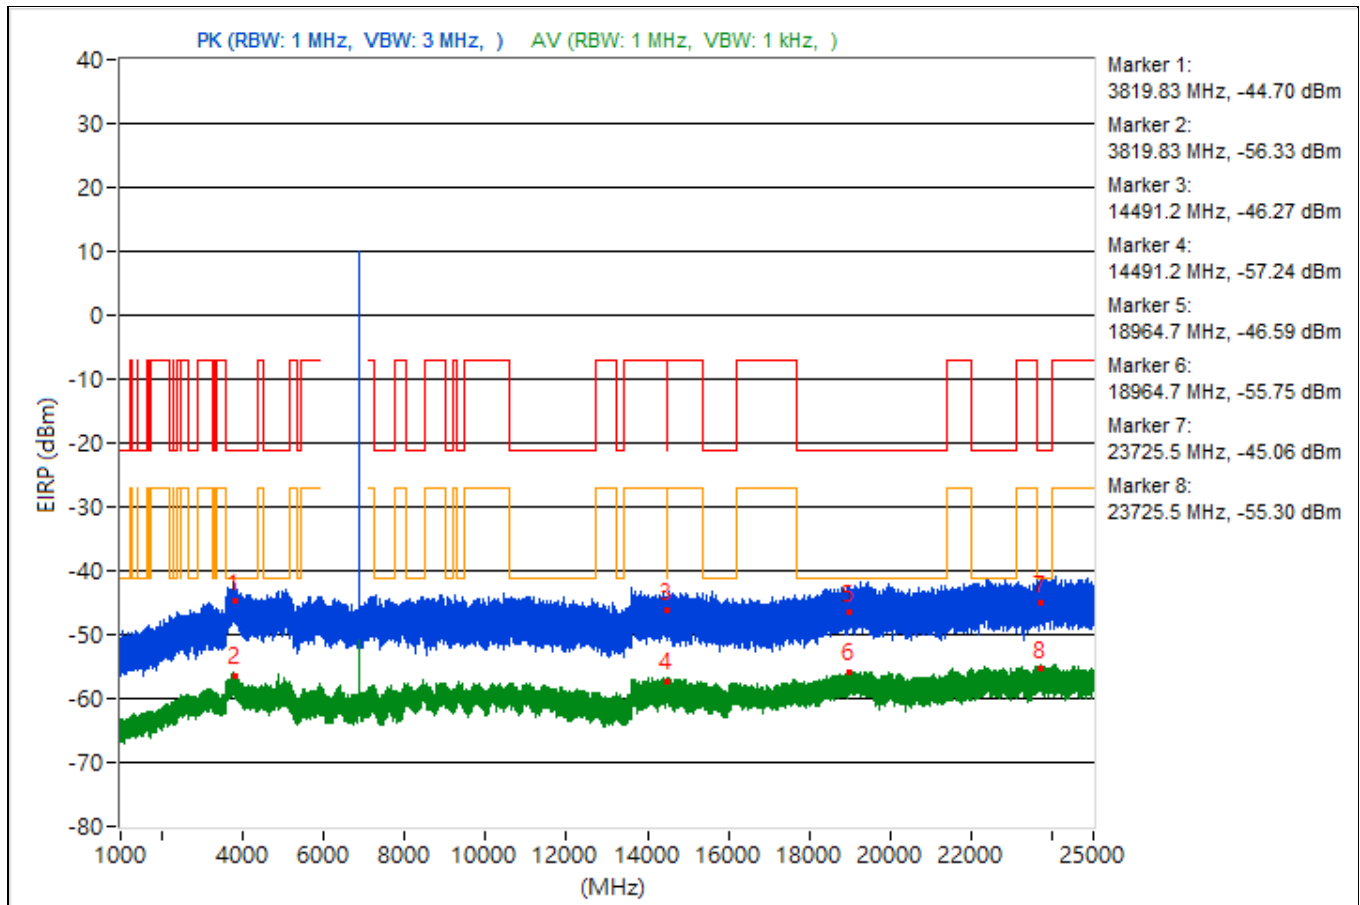


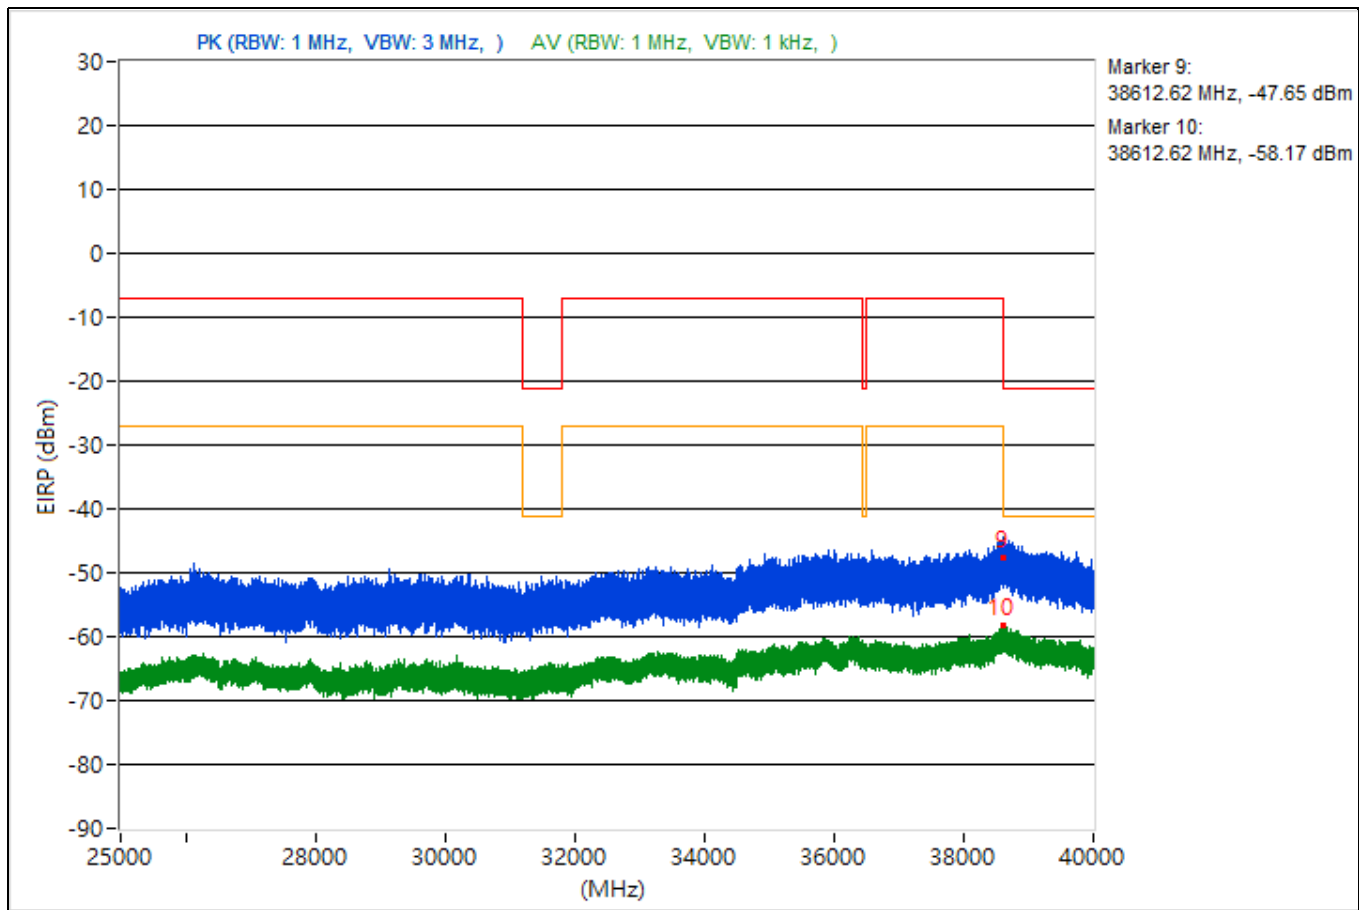


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.57	49.5 PK	74	-24.5	-52.52	-55.29	4.92	-45.76
2	3809.57	39.16 AV	54	-14.84	-66.32	-62.54	4.92	-56.1
3	15372.98	47.67 PK	74	-26.33	-55.55	-55.5	4.92	-47.59
4	15372.98	38.35 AV	54	-15.65	-63.77	-66.26	4.92	-56.91
5	19527.4	51.86 PK	74	-22.14	-53.07	-50.09	4.92	-43.4
6	19527.4	39.26 AV	54	-14.74	-62.74	-65.56	4.92	-56
7	23993.7	50.84 PK	74	-23.16	-54.08	-51.12	4.92	-44.42
8	23993.7	40.26 AV	54	-13.74	-61.87	-64.35	4.92	-55
9	38611.56	46.7 PK	74	-27.3	-55.24	-58.27	4.92	-48.56
10	38611.56	37.1 AV	54	-16.9	-67.21	-65.2	4.92	-58.16

Note: Margin value = Emission Level - Limit value

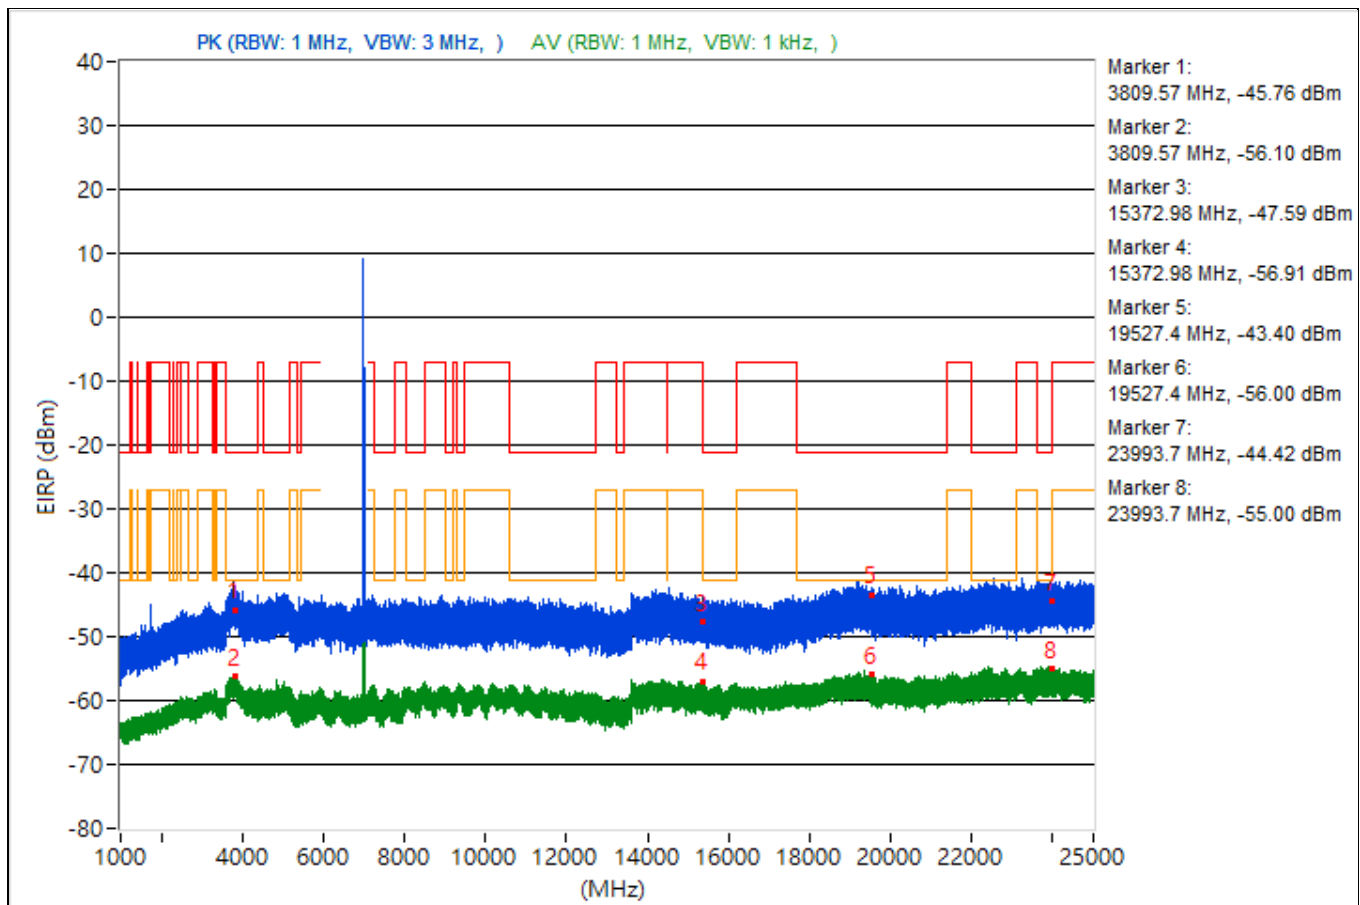


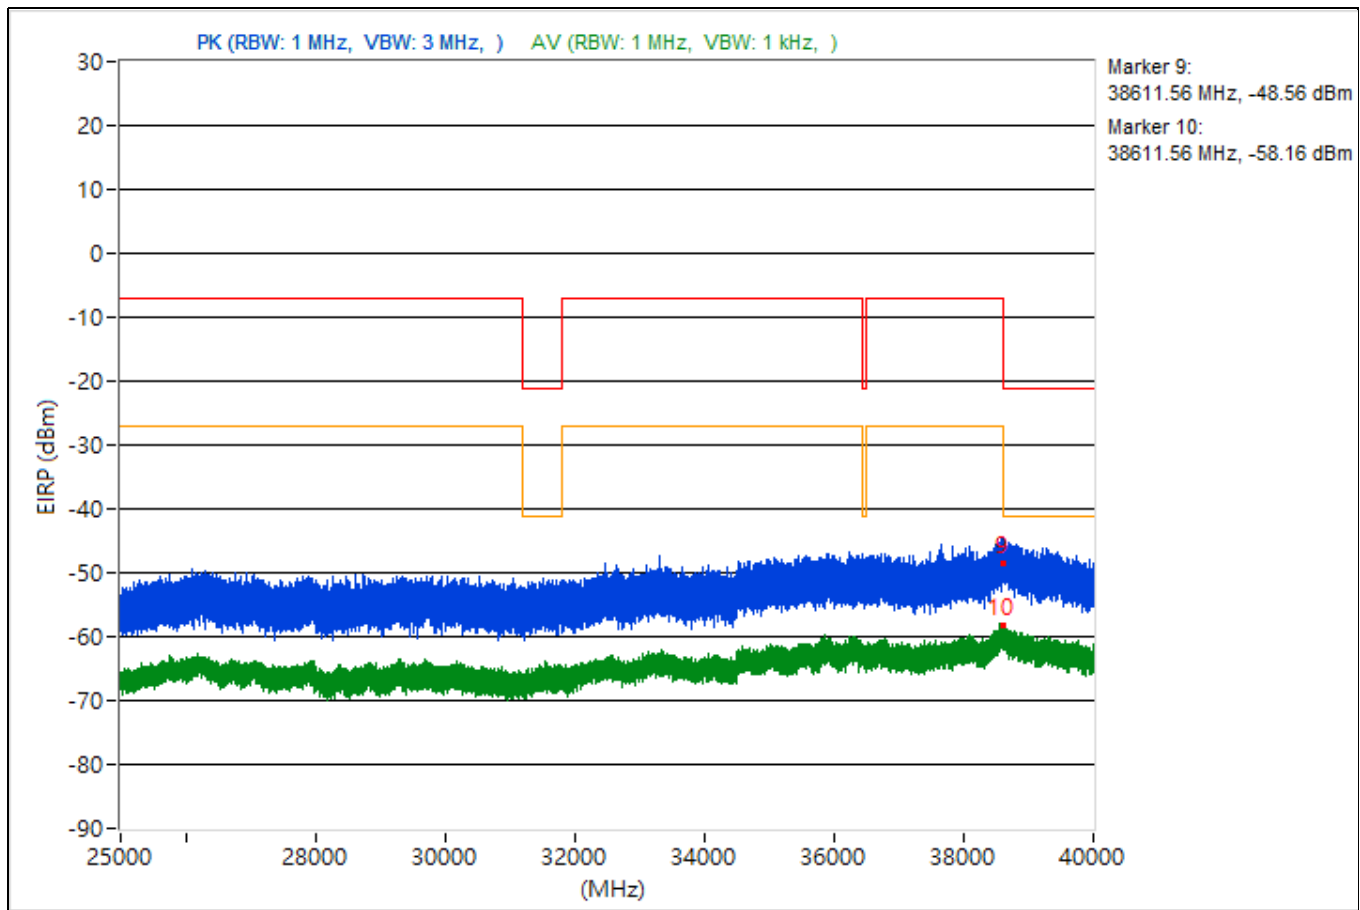


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3724.94	50.18 PK	74	-23.82	-52.64	-53.42	4.92	-45.08
2	3724.94	38.78 AV	54	-15.22	-66.1	-63.2	4.92	-56.48
3	14477.96	49.88 PK	74	-24.12	-53.57	-53.06	4.92	-45.38
4	14477.96	38.19 AV	54	-15.81	-65.88	-64.26	4.92	-57.07
5	19004	51.07 PK	74	-22.93	-53.23	-51.24	4.92	-44.19
6	19004	39.45 AV	54	-14.55	-65.34	-62.57	4.92	-55.81
7	22333.2	50.87 PK	74	-23.13	-54.06	-51.09	4.92	-44.39
8	22333.2	39.74 AV	54	-14.26	-61.94	-65.81	4.92	-55.52
9	38629.78	44.57 PK	74	-29.43	-59.63	-57.8	4.92	-50.69
10	38629.78	36.94 AV	54	-17.06	-65.37	-67.35	4.92	-58.32

Note: Margin value = Emission Level - Limit value

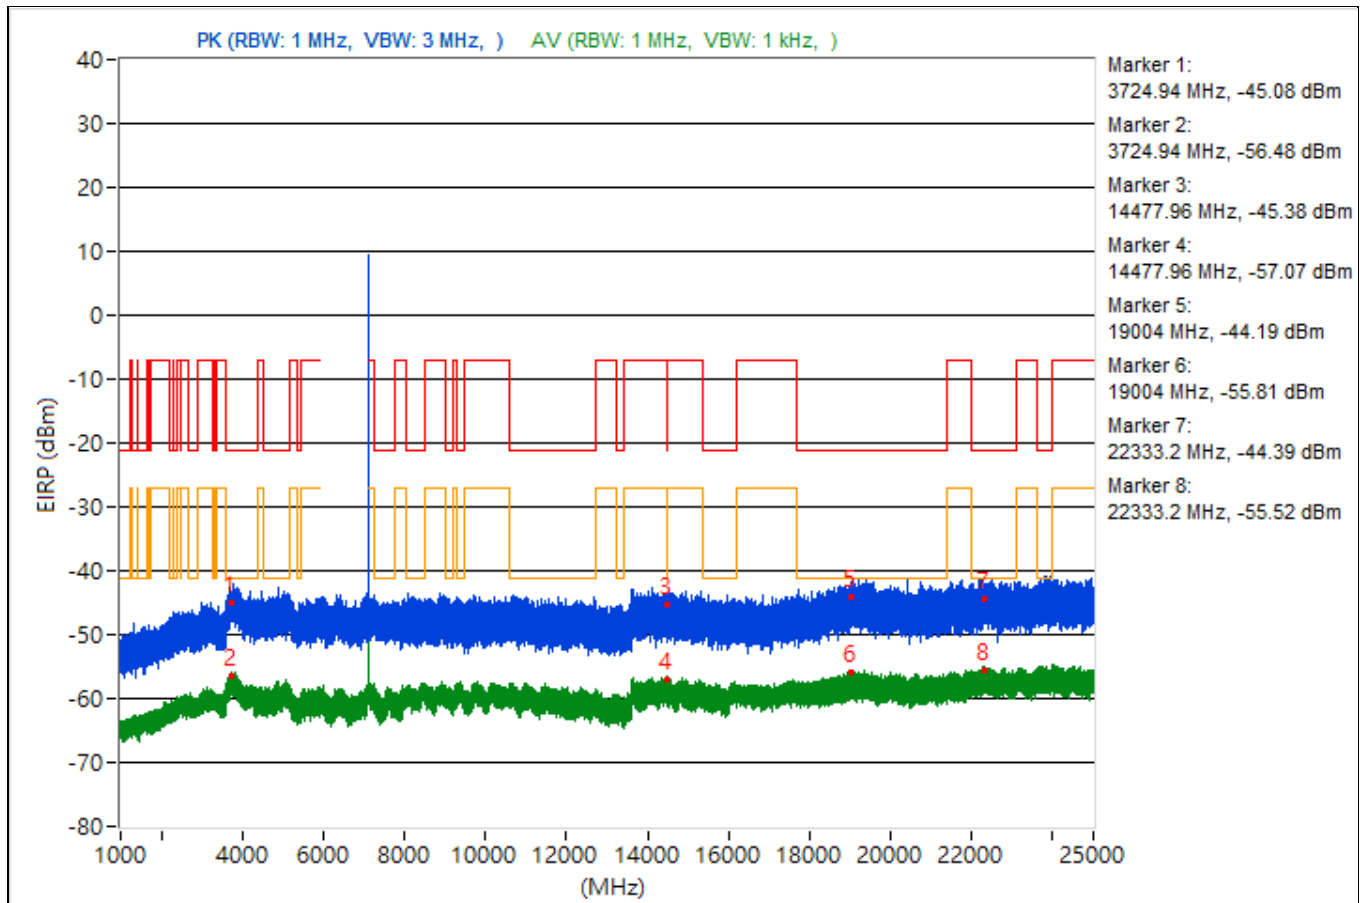


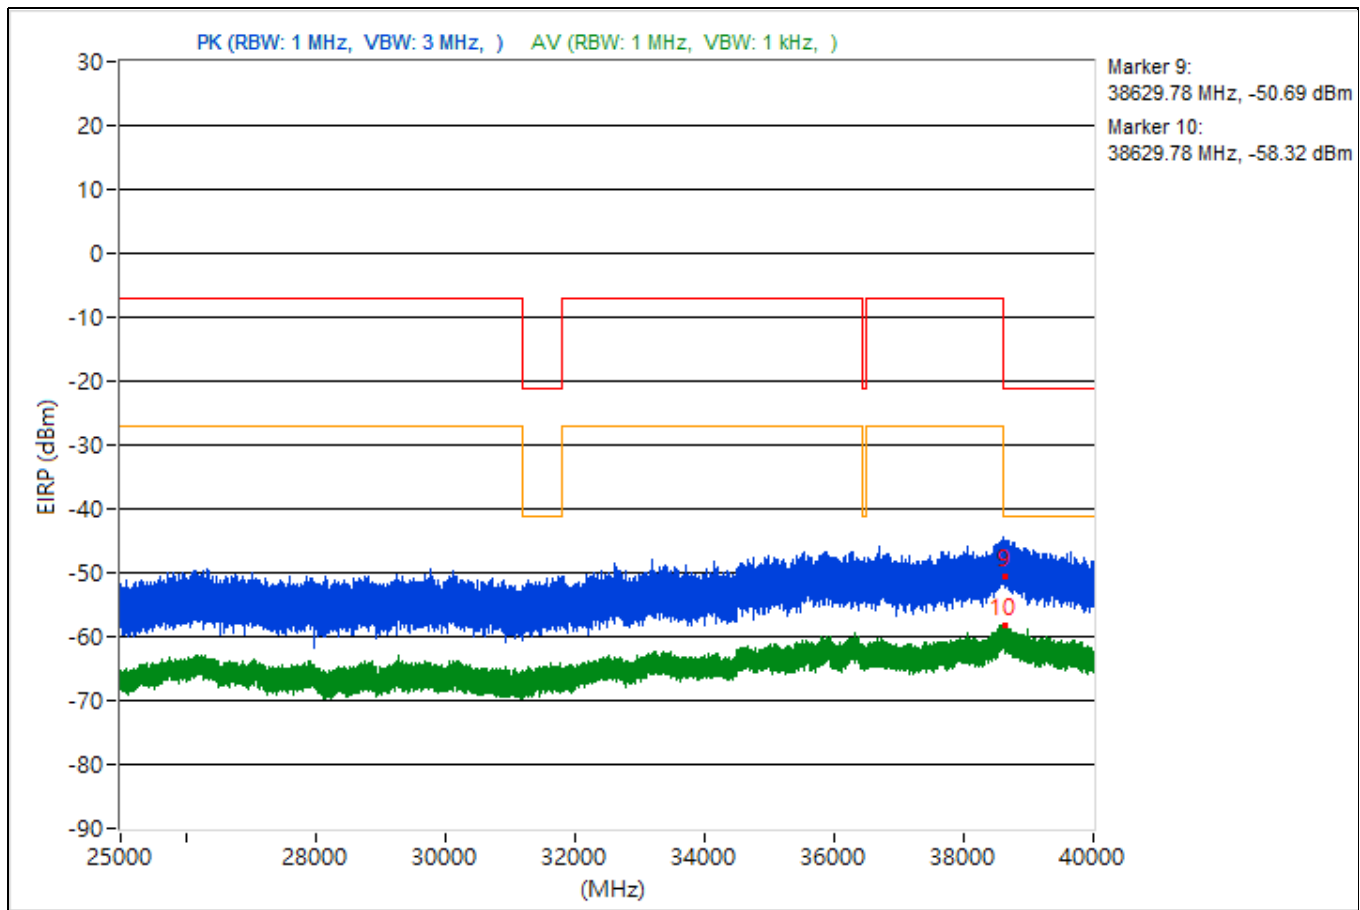


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.12	50.63 PK	74	-23.37	-52.24	-52.9	4.92	-44.63
2	3825.12	38.83 AV	54	-15.17	-65.14	-63.71	4.92	-56.43
3	8473.78	46.58 PK	74	-27.42	-57.77	-55.7	4.92	-48.68
4	8473.78	37.14 AV	54	-16.86	-68.21	-64.61	4.92	-58.12
5	18875.8	50.09 PK	74	-23.91	-53.18	-53.02	4.92	-45.17
6	18875.8	38.54 AV	54	-15.46	-67.3	-63.01	4.92	-56.72
7	23639.5	51.44 PK	74	-22.56	-55.29	-49.83	4.92	-43.82
8	23639.5	40.1 AV	54	-13.9	-61.73	-65.07	4.92	-55.16
9	38621.33	47.73 PK	74	-26.27	-54.28	-57.1	4.92	-47.53
10	38621.33	35.77 AV	54	-18.23	-69.17	-66.17	4.92	-59.49

Note: Margin value = Emission Level - Limit value

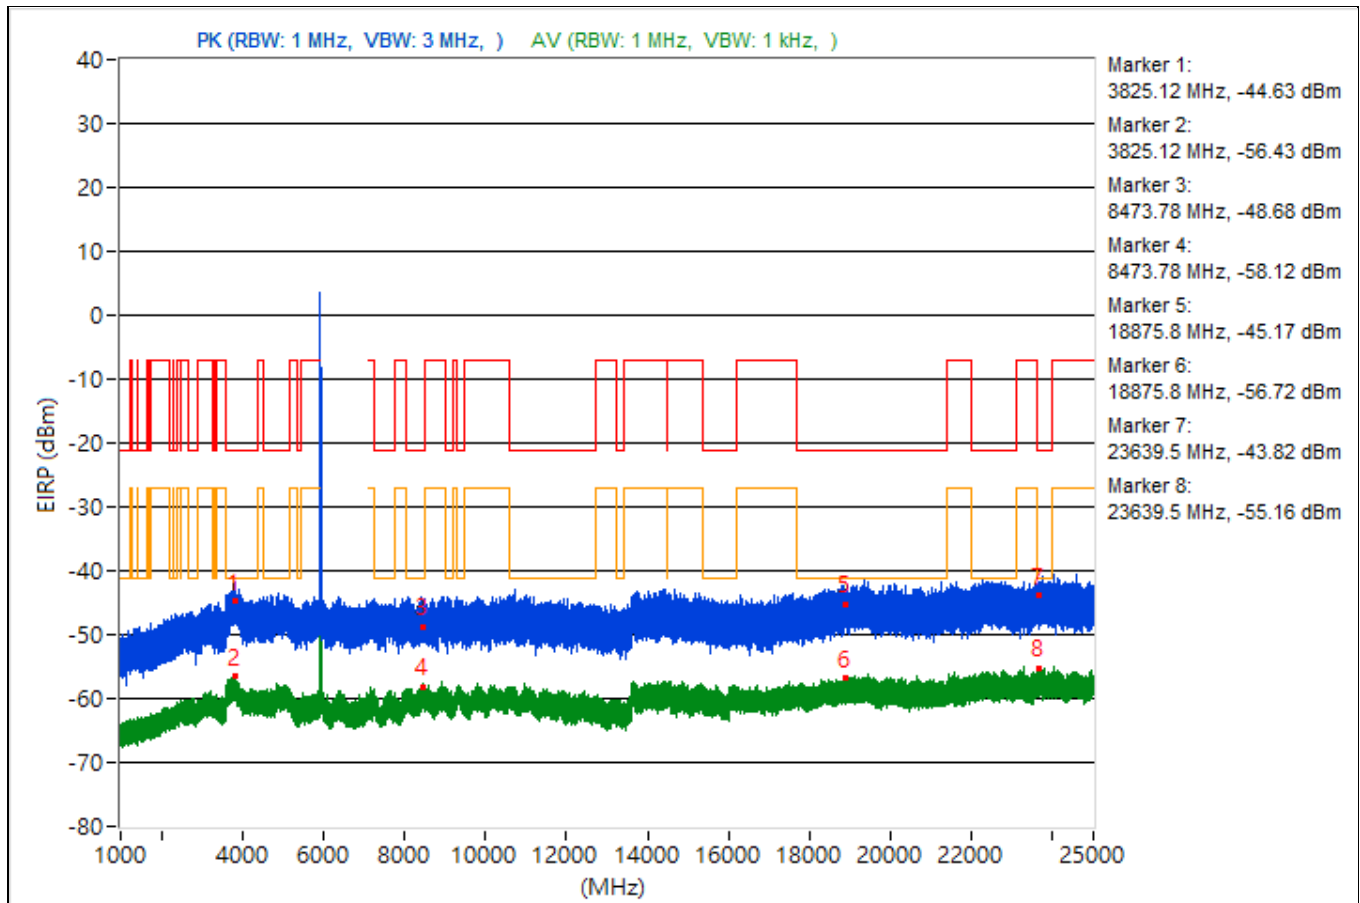


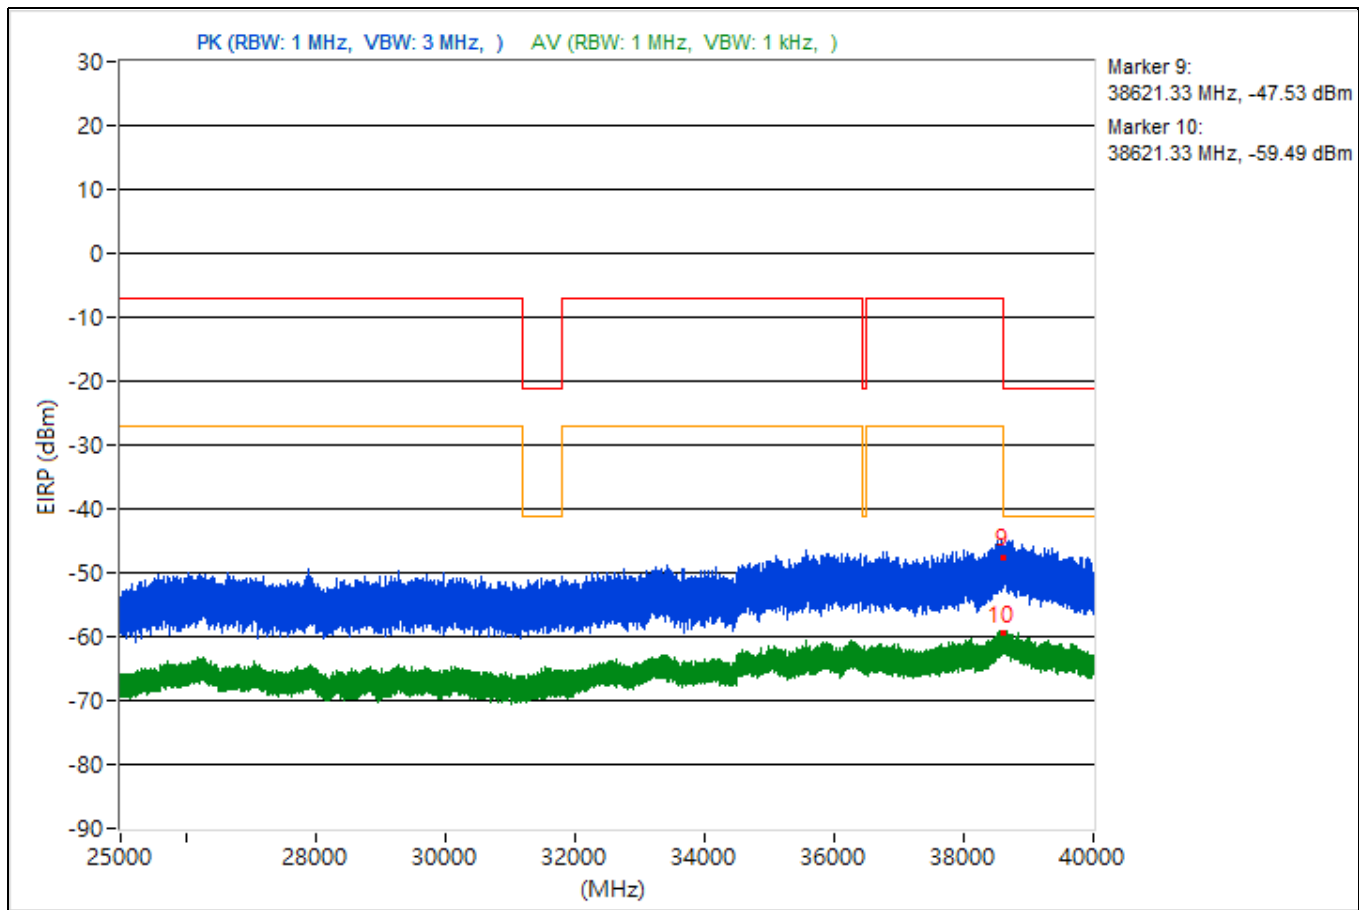


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3744.23	48.31 PK	74	-25.69	-53.71	-56.48	4.92	-46.95
2	3744.23	38.5 AV	54	-15.5	-63.27	-66.82	4.92	-56.76
3	14493.24	48.13 PK	74	-25.87	-54.36	-55.91	4.92	-47.13
4	14493.24	37.44 AV	54	-16.56	-64.07	-68.54	4.92	-57.82
5	19405.3	49.84 PK	74	-24.16	-55.83	-51.78	4.92	-45.42
6	19405.3	38.75 AV	54	-15.25	-65.58	-63.54	4.92	-56.51
7	23730	50.12 PK	74	-23.88	-51.68	-55.12	4.92	-45.14
8	23730	39.6 AV	54	-14.4	-61.74	-66.91	4.92	-55.66
9	38608	47.55 PK	74	-26.45	-54.89	-56.55	4.92	-47.71
10	38608	36.13 AV	54	-17.87	-68.66	-65.9	4.92	-59.13

Note: Margin value = Emission Level - Limit value

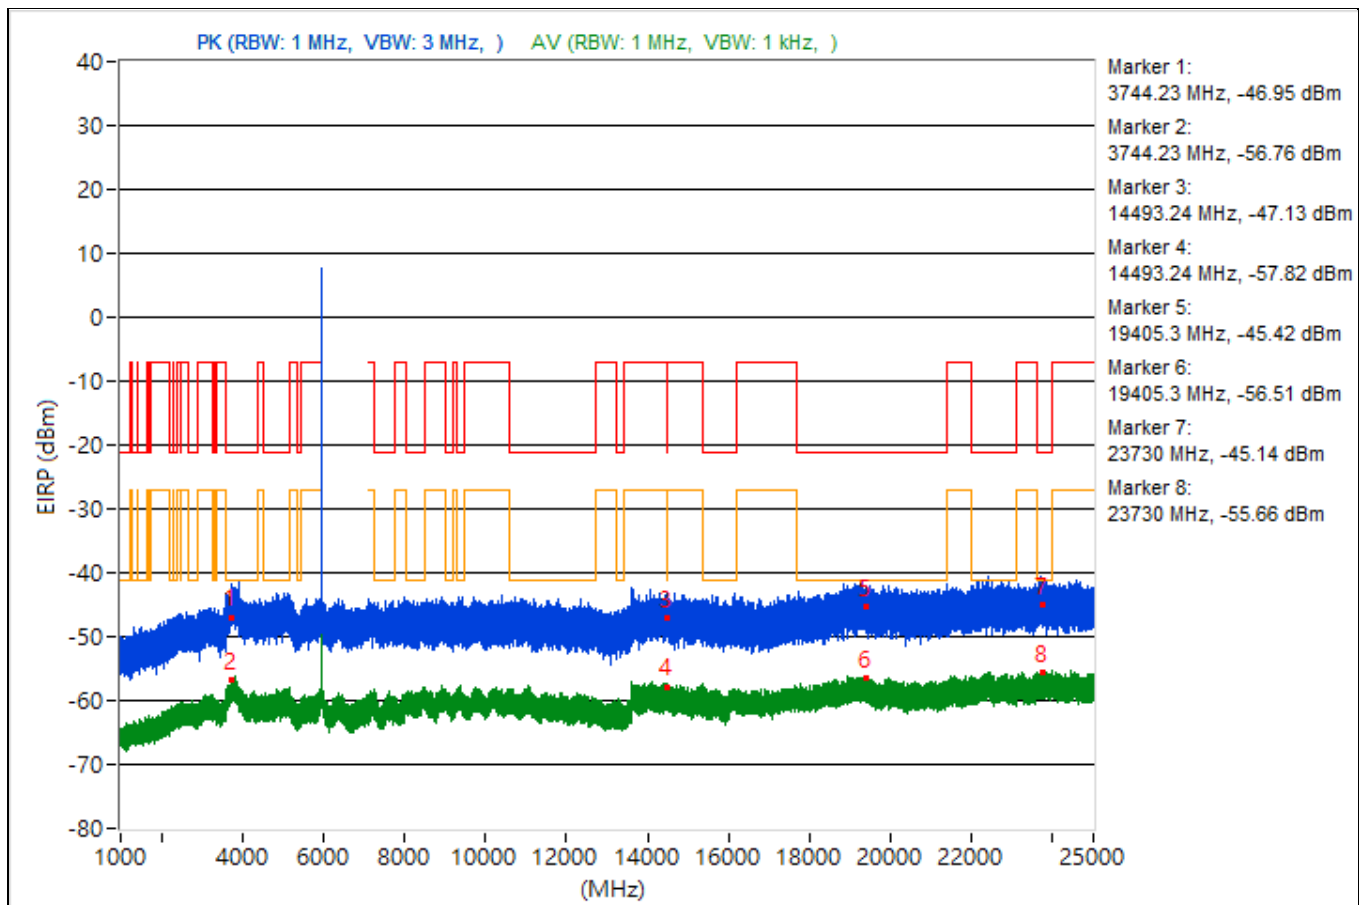


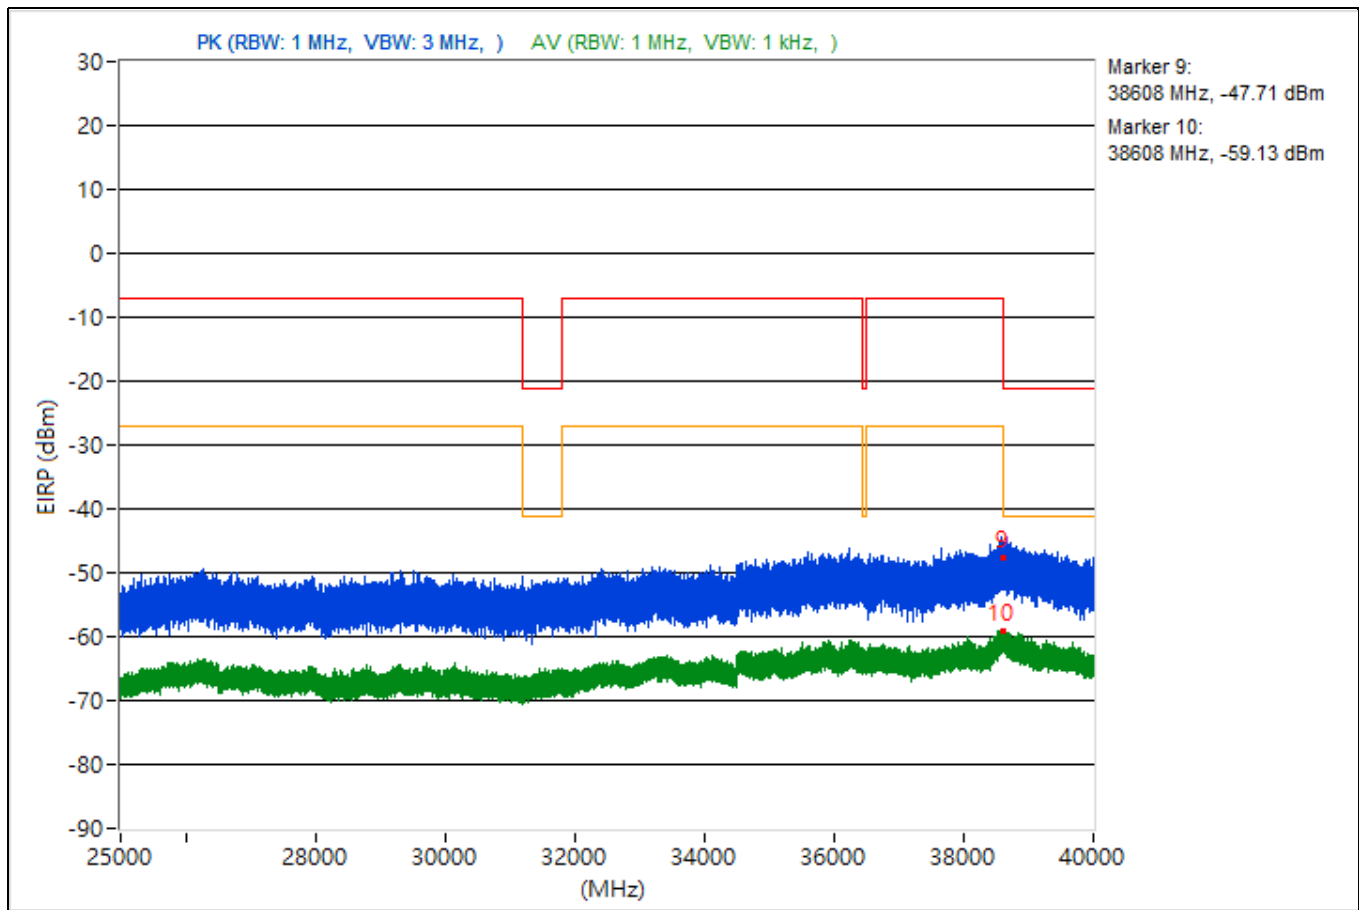


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.67	47.91 PK	74	-26.09	-55.43	-55.13	4.92	-47.35
2	3825.67	38.18 AV	54	-15.82	-66.34	-63.99	4.92	-57.08
3	14470.84	47.34 PK	74	-26.66	-54.64	-57.55	4.92	-47.92
4	14470.84	37.59 AV	54	-16.41	-65.01	-66.29	4.92	-57.67
5	19184.1	49.48 PK	74	-24.52	-56.15	-52.16	4.92	-45.78
6	19184.1	39.16 AV	54	-14.84	-64.97	-63.26	4.92	-56.1
7	23730.9	50.19 PK	74	-23.81	-51.52	-55.27	4.92	-45.07
8	23730.9	39.22 AV	54	-14.78	-62.5	-66.22	4.92	-56.04
9	38654.93	44.26 PK	74	-29.74	-57.73	-60.61	4.92	-51
10	38654.93	35.91 AV	54	-18.09	-69.5	-65.82	4.92	-59.35

Note: Margin value = Emission Level - Limit value

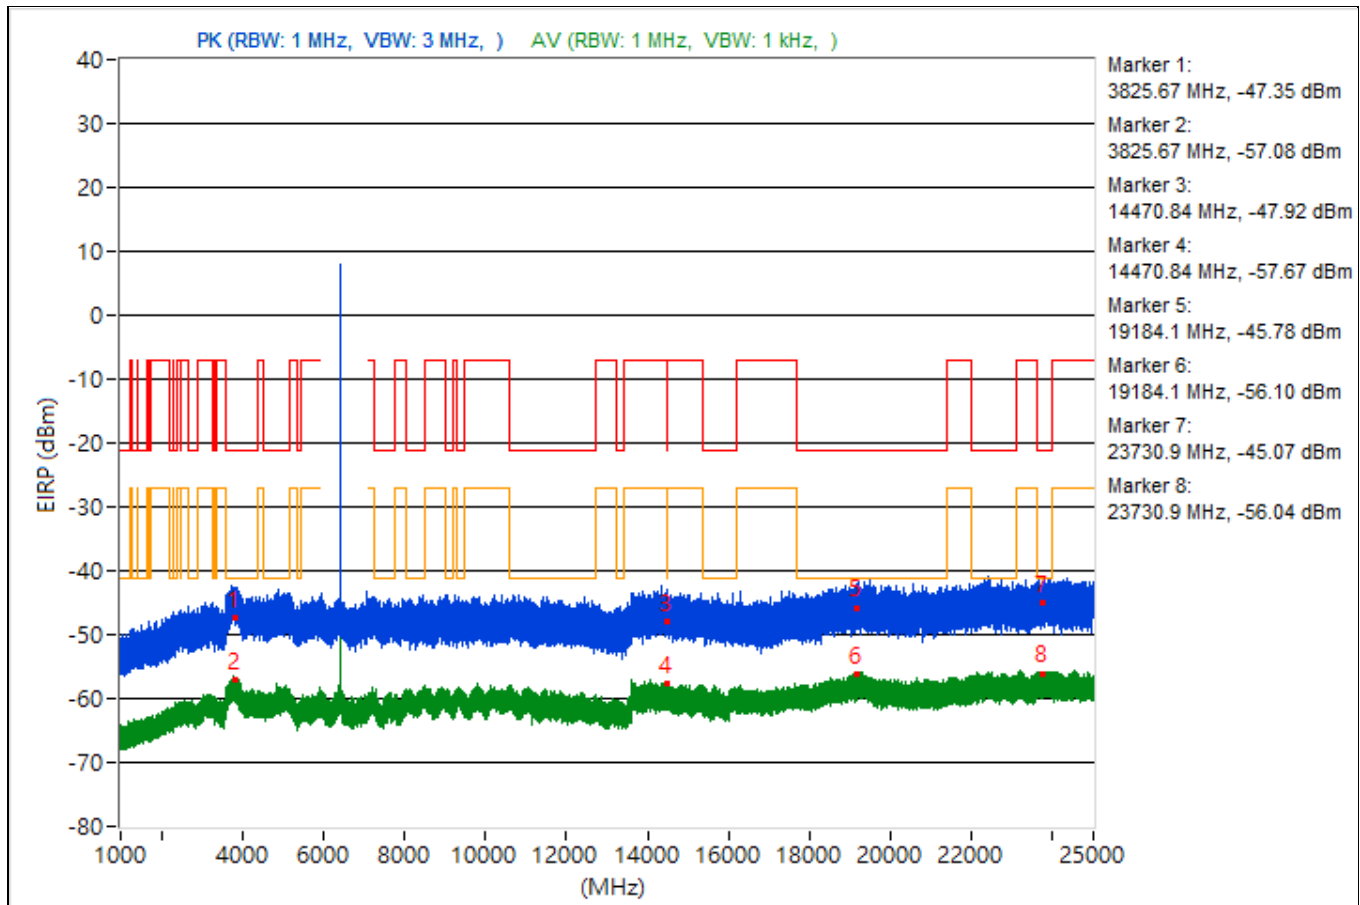


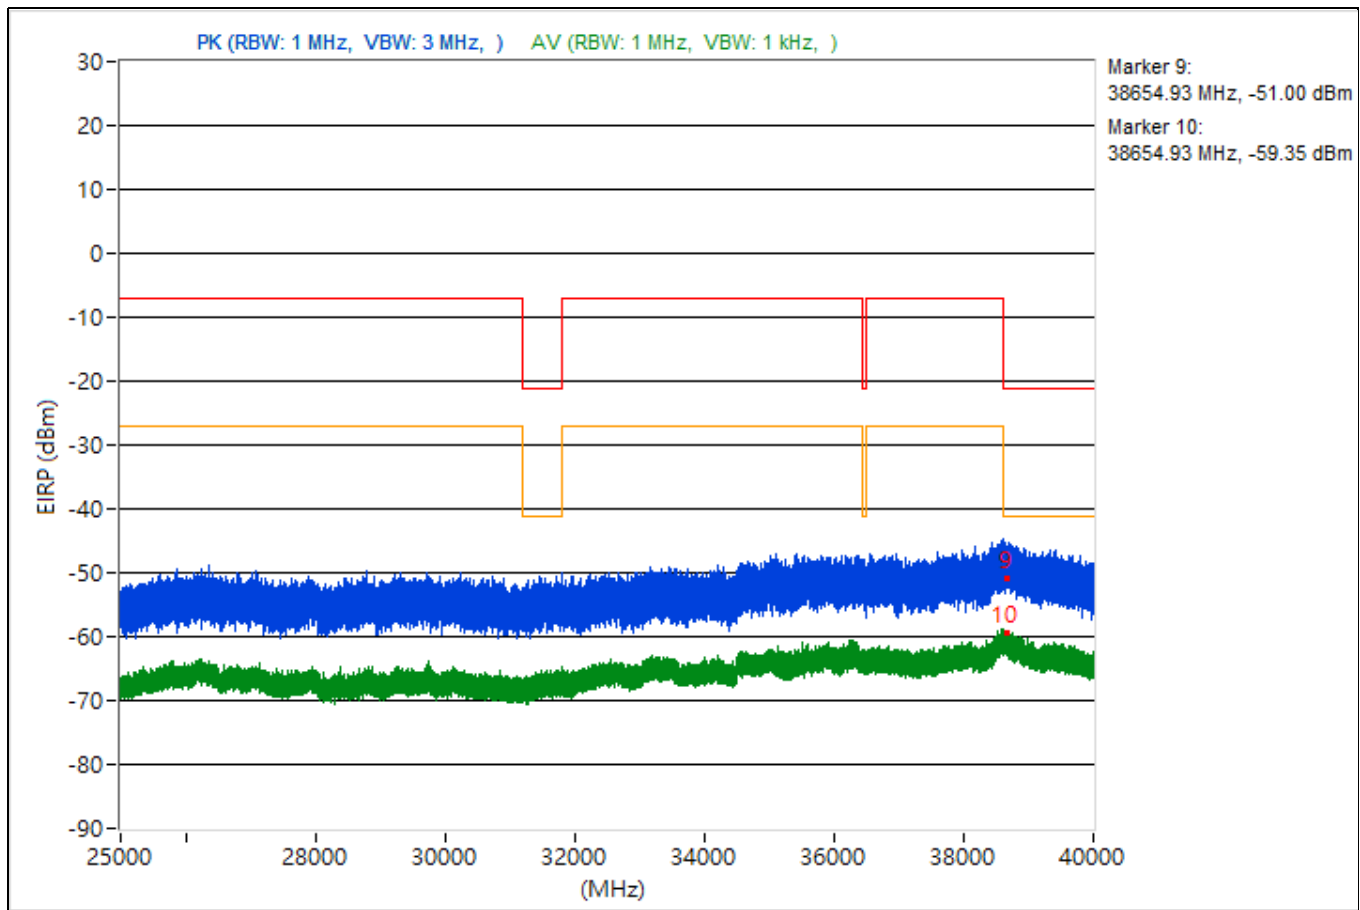


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.64	51.28 PK	74	-22.72	-54.9	-50.16	4.92	-43.98
2	3795.64	37.89 AV	54	-16.11	-63.87	-67.45	4.92	-57.37
3	9374.49	47.45 PK	74	-26.55	-56.87	-54.85	4.92	-47.81
4	9374.49	36.88 AV	54	-17.12	-68.44	-64.89	4.92	-58.38
5	19014.3	49.04 PK	74	-24.96	-53.6	-54.79	4.92	-46.22
6	19014.3	38.32 AV	54	-15.68	-68.28	-62.98	4.92	-56.94
7	23654.3	50.44 PK	74	-23.56	-55.02	-51.26	4.92	-44.82
8	23654.3	39.81 AV	54	-14.19	-64.31	-62.61	4.92	-55.45
9	38614.13	48.58 PK	74	-25.42	-57.02	-53.08	4.92	-46.68
10	38614.13	36.67 AV	54	-17.33	-65.95	-67.17	4.92	-58.59

Note: Margin value = Emission Level - Limit value

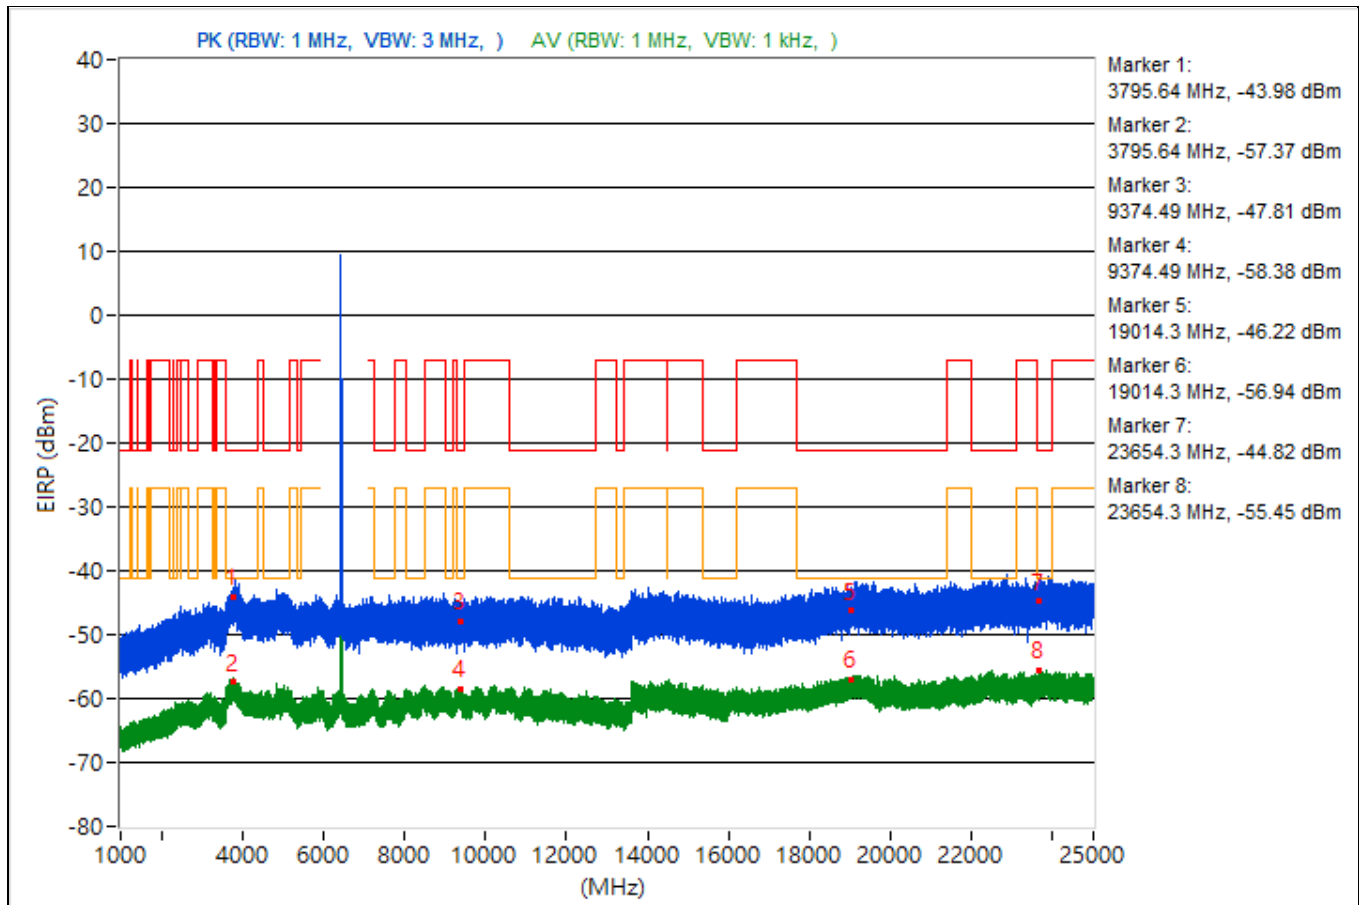


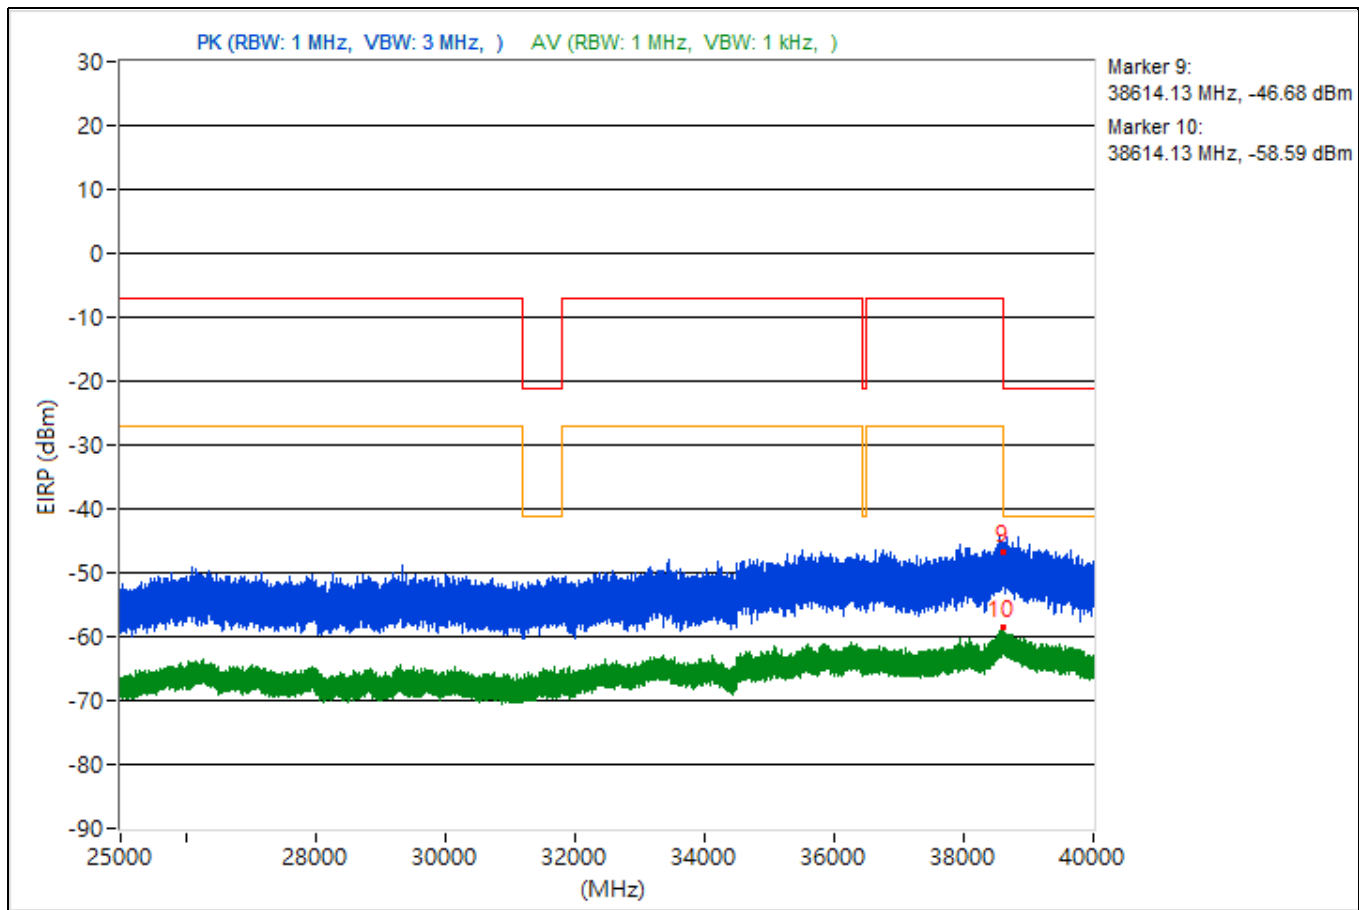


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3780.32	49.89 PK	74	-24.11	-53.11	-53.5	4.92	-45.37
2	3780.32	38.2 AV	54	-15.8	-66.71	-63.76	4.92	-57.06
3	9324.27	45.79 PK	74	-28.21	-58.1	-56.8	4.92	-49.47
4	9324.27	36.98 AV	54	-17.02	-68.27	-64.81	4.92	-58.28
5	19297.5	48.91 PK	74	-25.09	-53.59	-55.11	4.92	-46.35
6	19297.5	38.87 AV	54	-15.13	-65.44	-63.43	4.92	-56.39
7	23719.6	51.43 PK	74	-22.57	-53.52	-50.51	4.92	-43.83
8	23719.6	39.22 AV	54	-14.78	-62.41	-66.43	4.92	-56.04
9	38646.76	45.03 PK	74	-28.97	-56.51	-60.86	4.92	-50.23
10	38646.76	35.87 AV	54	-18.13	-69.48	-65.89	4.92	-59.39

Note: Margin value = Emission Level - Limit value

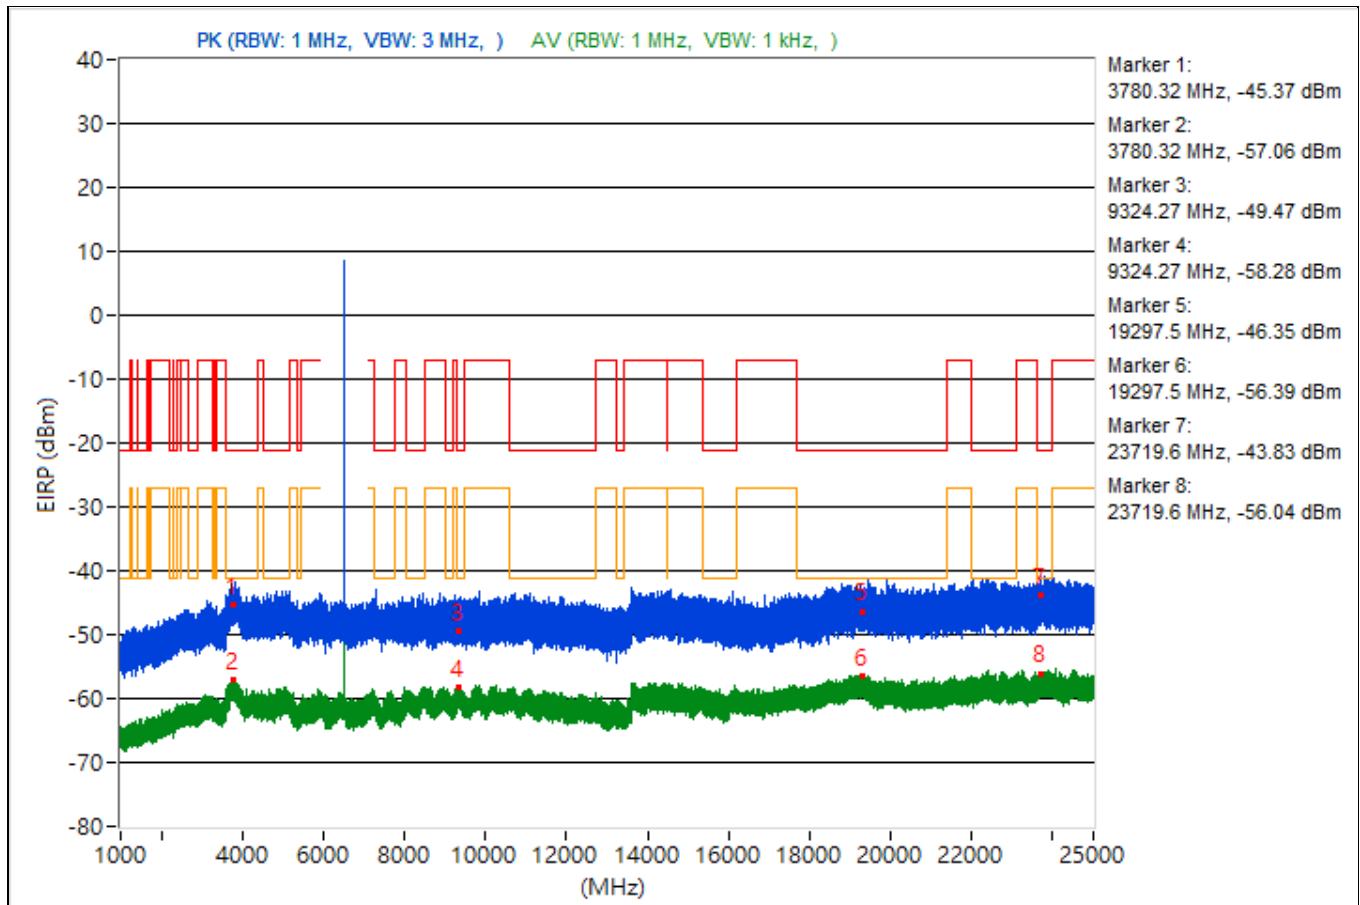


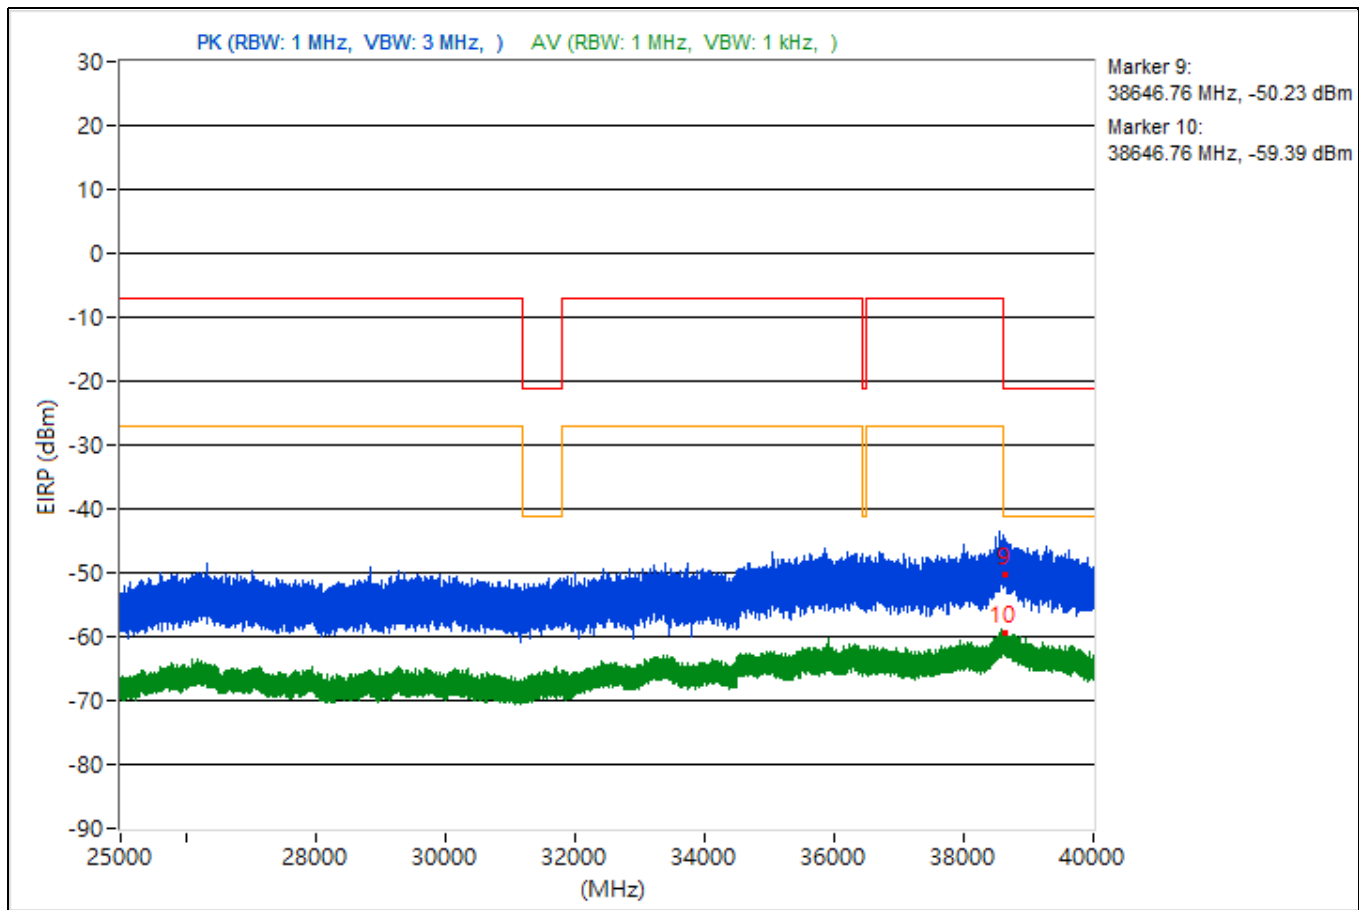


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.47	49.81 PK	74	-24.19	-52.38	-54.68	4.92	-45.45
2	3821.47	37.94 AV	54	-16.06	-63.83	-67.37	4.92	-57.32
3	14477.16	48.9 PK	74	-25.1	-54.37	-54.2	4.92	-46.36
4	14477.16	37.45 AV	54	-16.55	-64.42	-67.64	4.92	-57.81
5	19361	49.51 PK	74	-24.49	-53.31	-54.09	4.92	-45.75
6	19361	38.63 AV	54	-15.37	-67.34	-62.88	4.92	-56.63
7	23709.7	54.39 PK	74	-19.61	-51.77	-47.05	4.92	-40.87
8	23709.7	39.24 AV	54	-14.76	-66.14	-62.51	4.92	-56.02
9	38621.87	44.41 PK	74	-29.59	-59.72	-58.01	4.92	-50.85
10	38621.87	35.98 AV	54	-18.02	-69.06	-65.92	4.92	-59.28

Note: Margin value = Emission Level - Limit value

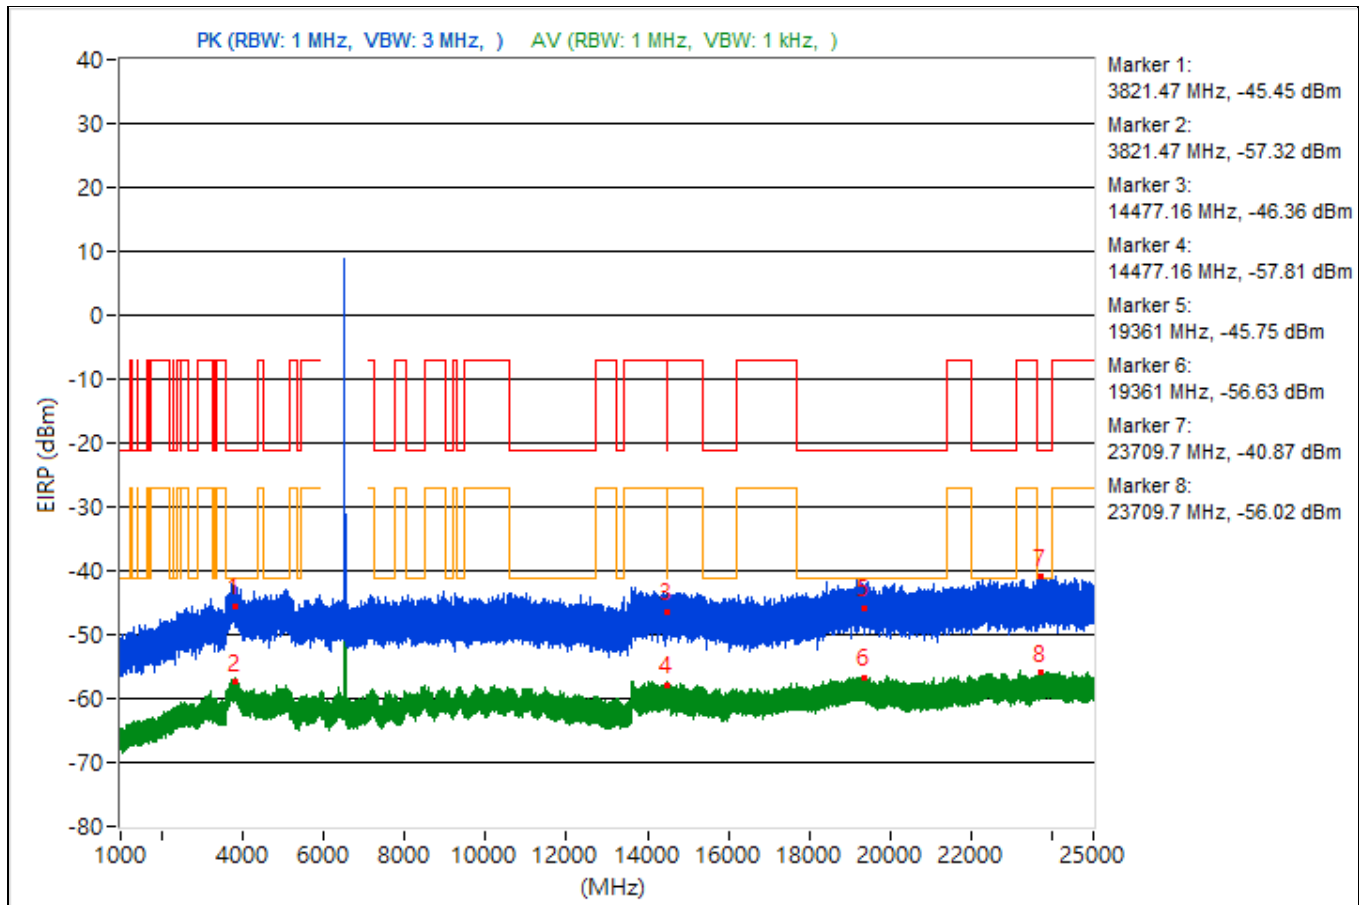


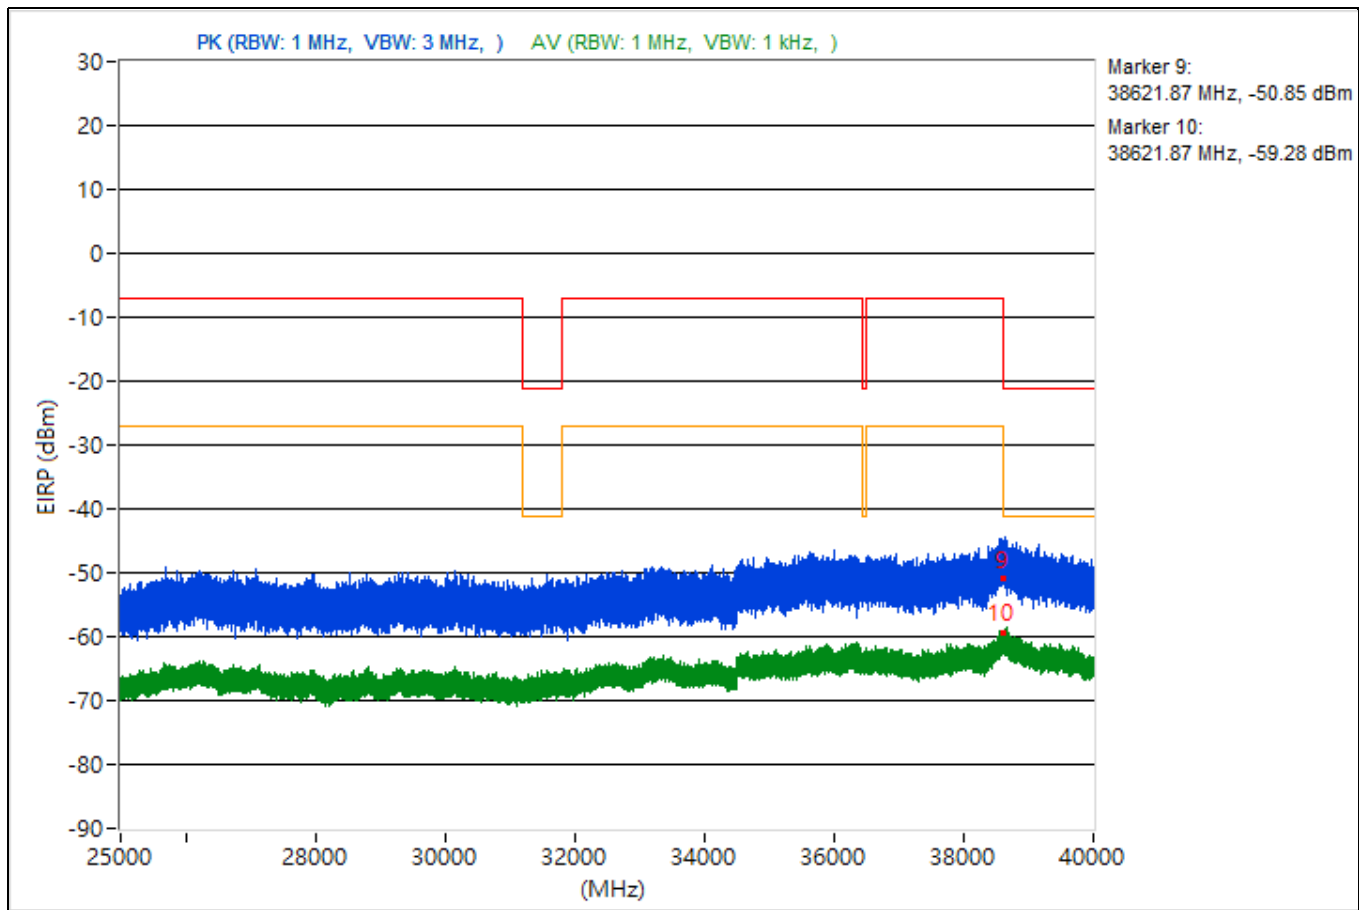


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.87	48.8 PK	74	-25.2	-55	-53.85	4.92	-46.46
2	3822.87	38.11 AV	54	-15.89	-65.94	-64.35	4.92	-57.15
3	8485.78	48.36 PK	74	-25.64	-54.78	-54.89	4.92	-46.9
4	8485.78	37.27 AV	54	-16.73	-67.18	-64.94	4.92	-57.99
5	19236.7	47.78 PK	74	-26.22	-54.32	-56.86	4.92	-47.48
6	19236.7	38.97 AV	54	-15.03	-65.06	-63.52	4.92	-56.29
7	23729.4	51.03 PK	74	-22.97	-50.87	-53.98	4.92	-44.23
8	23729.4	39.28 AV	54	-14.72	-62.68	-65.63	4.92	-55.98
9	38661.69	48.04 PK	74	-25.96	-54.94	-55.37	4.92	-47.22
10	38661.69	37.08 AV	54	-16.92	-64.91	-67.78	4.92	-58.18

Note: Margin value = Emission Level - Limit value

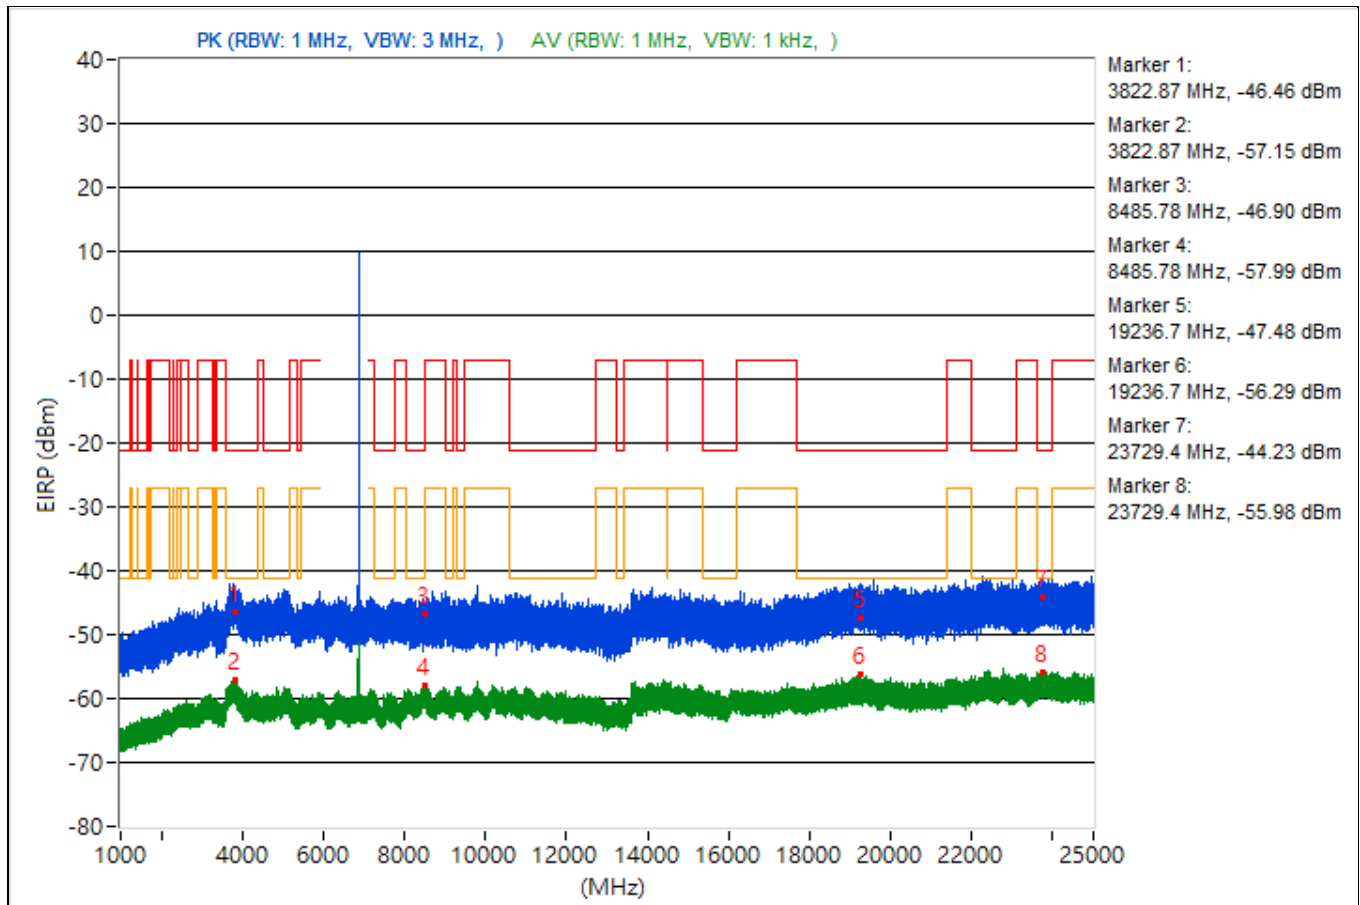


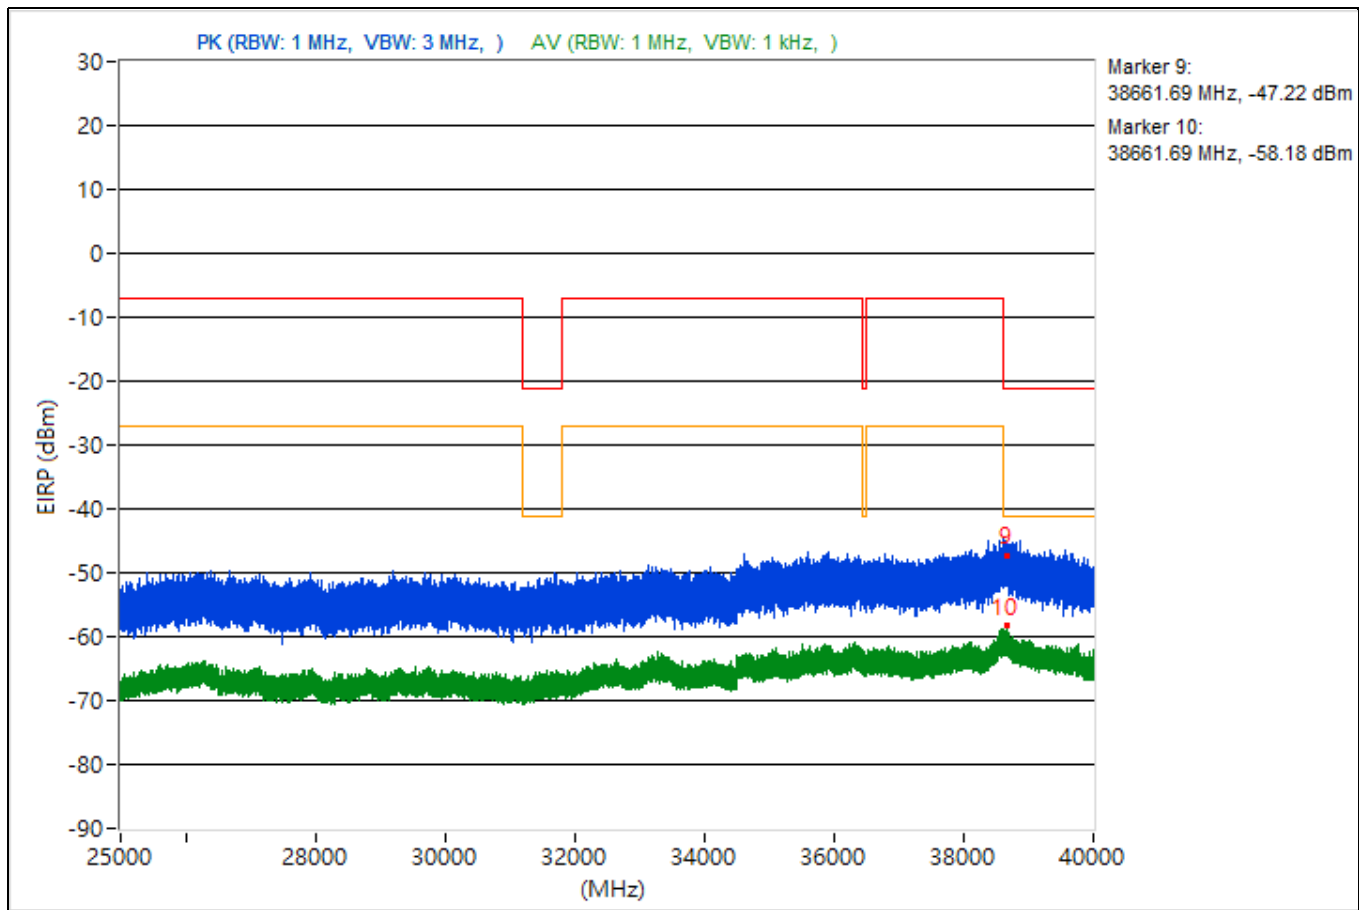


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3843.01	50.07 PK	74	-23.93	-51.94	-54.76	4.92	-45.19
2	3843.01	38.57 AV	54	-15.43	-63.88	-65.51	4.92	-56.69
3	14494.84	49.15 PK	74	-24.85	-53.35	-54.86	4.92	-46.11
4	14494.84	38.45 AV	54	-15.55	-65.4	-64.17	4.92	-56.81
5	19314.2	49.12 PK	74	-24.88	-55.97	-52.75	4.92	-46.14
6	19314.2	38.81 AV	54	-15.19	-65.8	-63.31	4.92	-56.45
7	22750.1	49.54 PK	74	-24.46	-54.38	-53.03	4.92	-45.72
8	22750.1	38.82 AV	54	-15.18	-62.48	-67.81	4.92	-56.44
9	38615.56	44.37 PK	74	-29.63	-58.75	-58.89	4.92	-50.89
10	38615.56	36.23 AV	54	-17.77	-65.77	-68.61	4.92	-59.03

Note: Margin value = Emission Level - Limit value

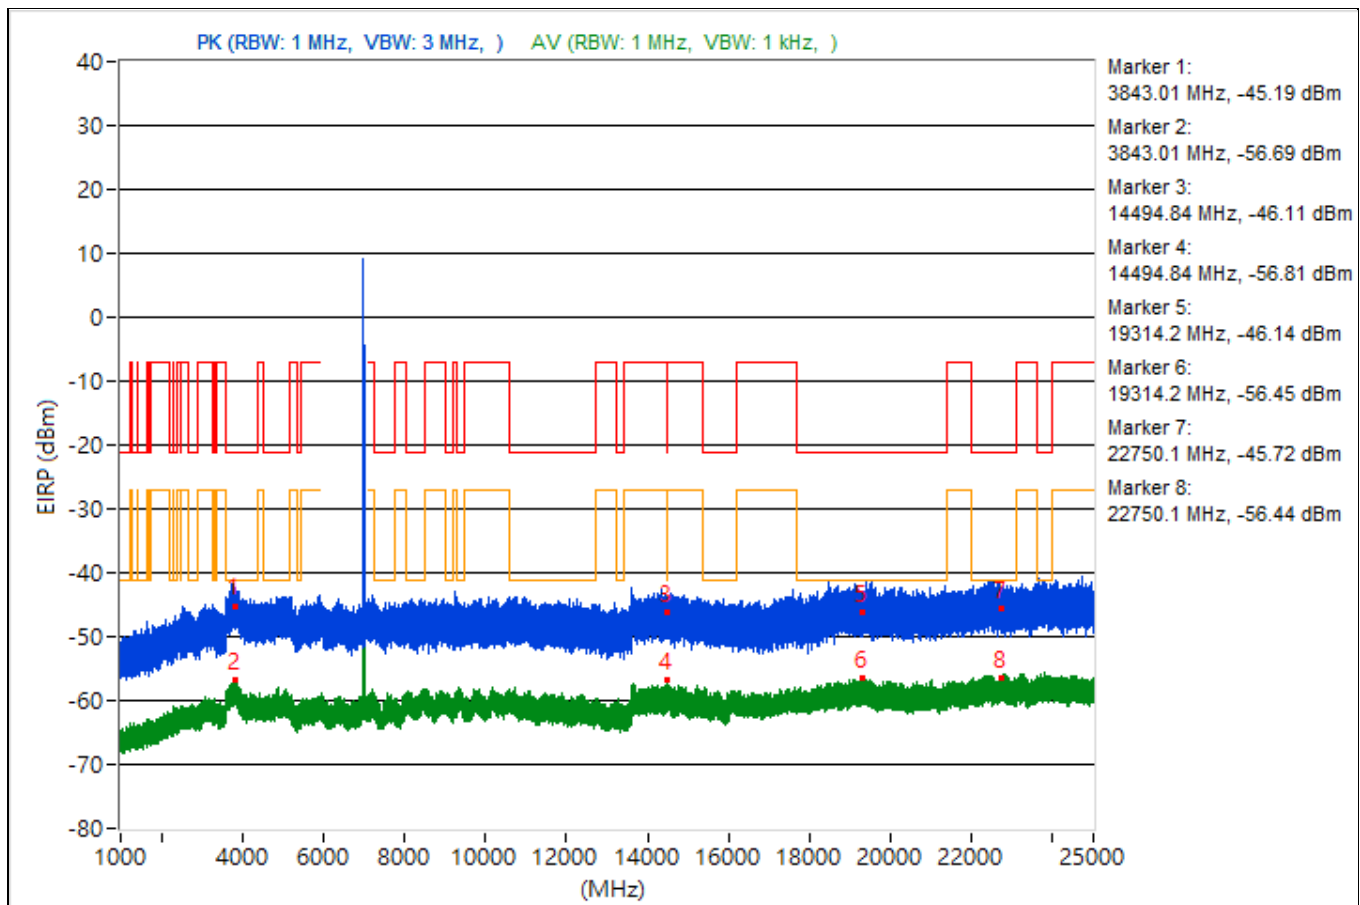


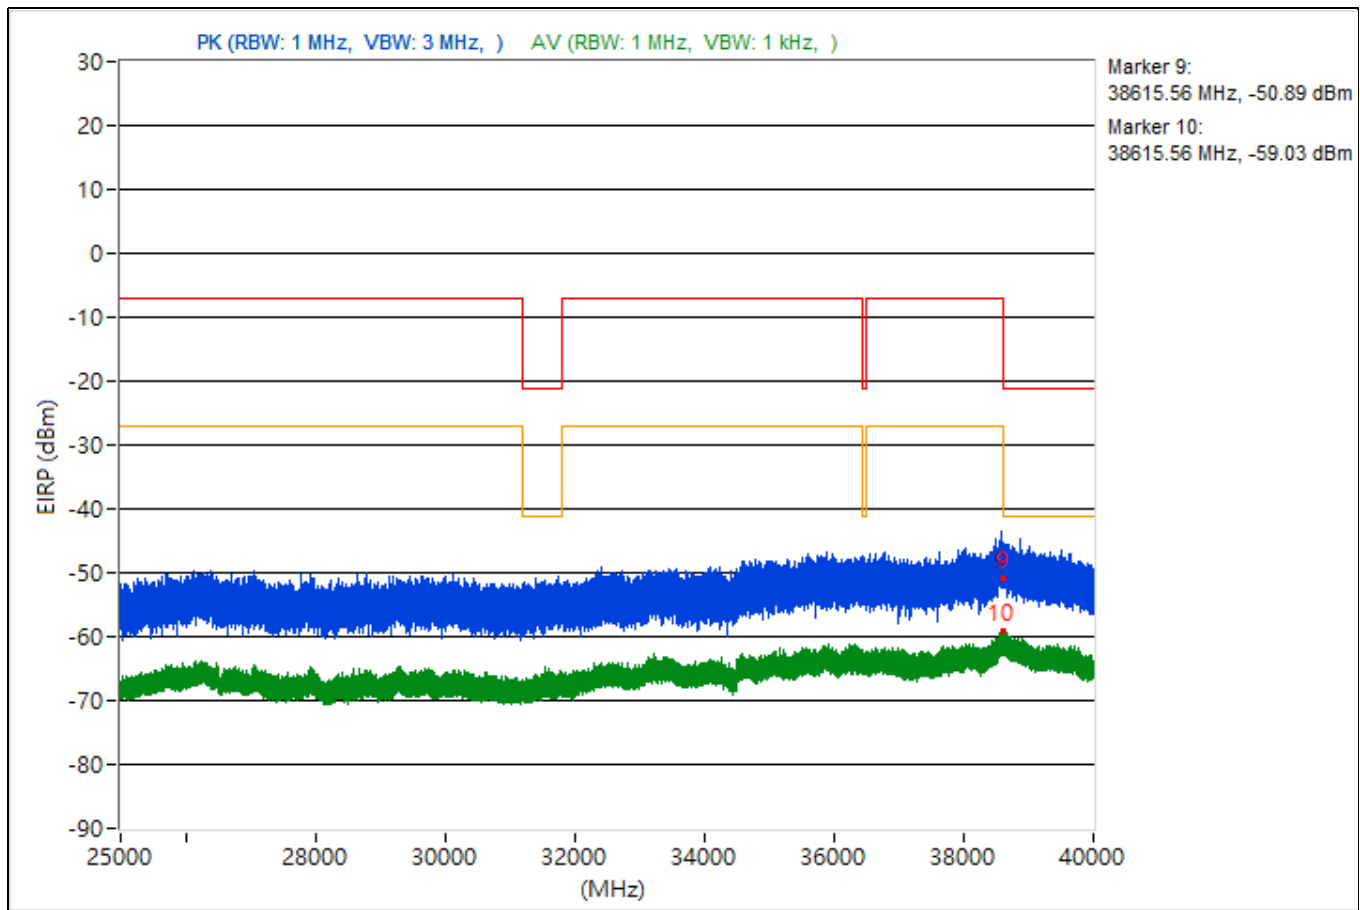


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.19	49.96 PK	74	-24.04	-52.44	-54.19	4.92	-45.3
2	3754.19	38.18 AV	54	-15.82	-66.25	-64.04	4.92	-57.08
3	14496.53	49.73 PK	74	-24.27	-52.82	-54.22	4.92	-45.53
4	14496.53	37.41 AV	54	-16.59	-64.64	-67.33	4.92	-57.85
5	19176.4	50.1 PK	74	-23.9	-52.65	-53.57	4.92	-45.16
6	19176.4	38.71 AV	54	-15.29	-63.12	-66.49	4.92	-56.55
7	23965.5	50.3 PK	74	-23.7	-52.68	-53.11	4.92	-44.96
8	23965.5	39.73 AV	54	-14.27	-62.5	-64.7	4.92	-55.53
9	38632.89	46.17 PK	74	-27.83	-55.71	-58.91	4.92	-49.09
10	38632.89	35.86 AV	54	-18.14	-69.02	-66.12	4.92	-59.4

Note: Margin value = Emission Level - Limit value

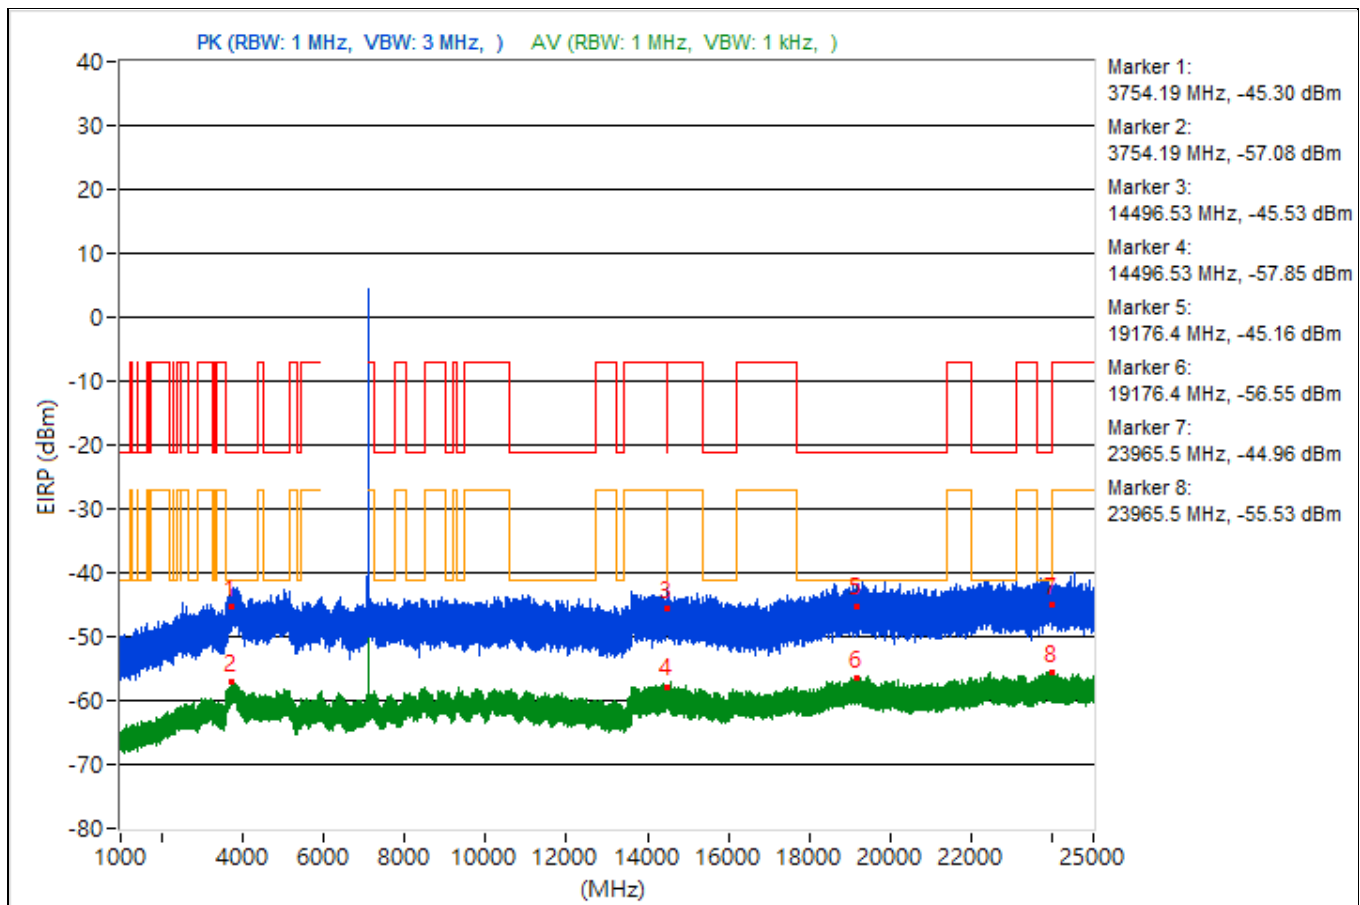


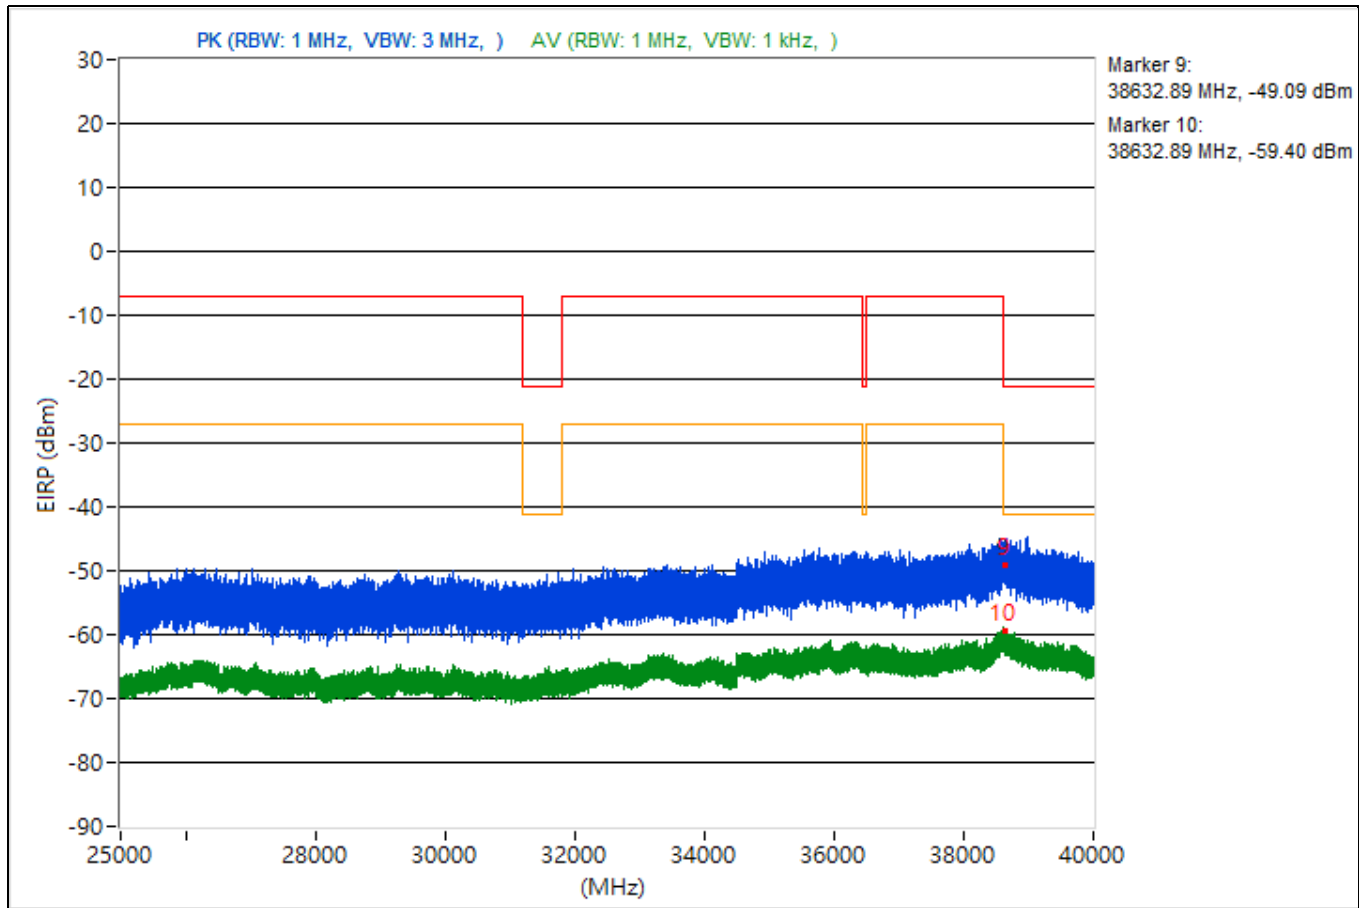


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3760.1	49.9 PK	74	-24.1	-52.66	-54.03	4.92	-45.36
2	3760.1	37.96 AV	54	-16.04	-67.33	-63.82	4.92	-57.3
3	14474.76	48.49 PK	74	-25.51	-54.12	-55.36	4.92	-46.77
4	14474.76	37.06 AV	54	-16.94	-68.21	-64.73	4.92	-58.2
5	20063.4	49.04 PK	74	-24.96	-52.77	-56.17	4.92	-46.22
6	20063.4	38.59 AV	54	-15.41	-65.58	-63.8	4.92	-56.67
7	23838.9	48.58 PK	74	-25.42	-53.86	-55.52	4.92	-46.68
8	23838.9	39.48 AV	54	-14.52	-62.52	-65.34	4.92	-55.78
9	38620.09	44.92 PK	74	-29.08	-58.38	-58.16	4.92	-50.34
10	38620.09	35.52 AV	54	-18.48	-69.5	-66.39	4.92	-59.74

Note: Margin value = Emission Level - Limit value

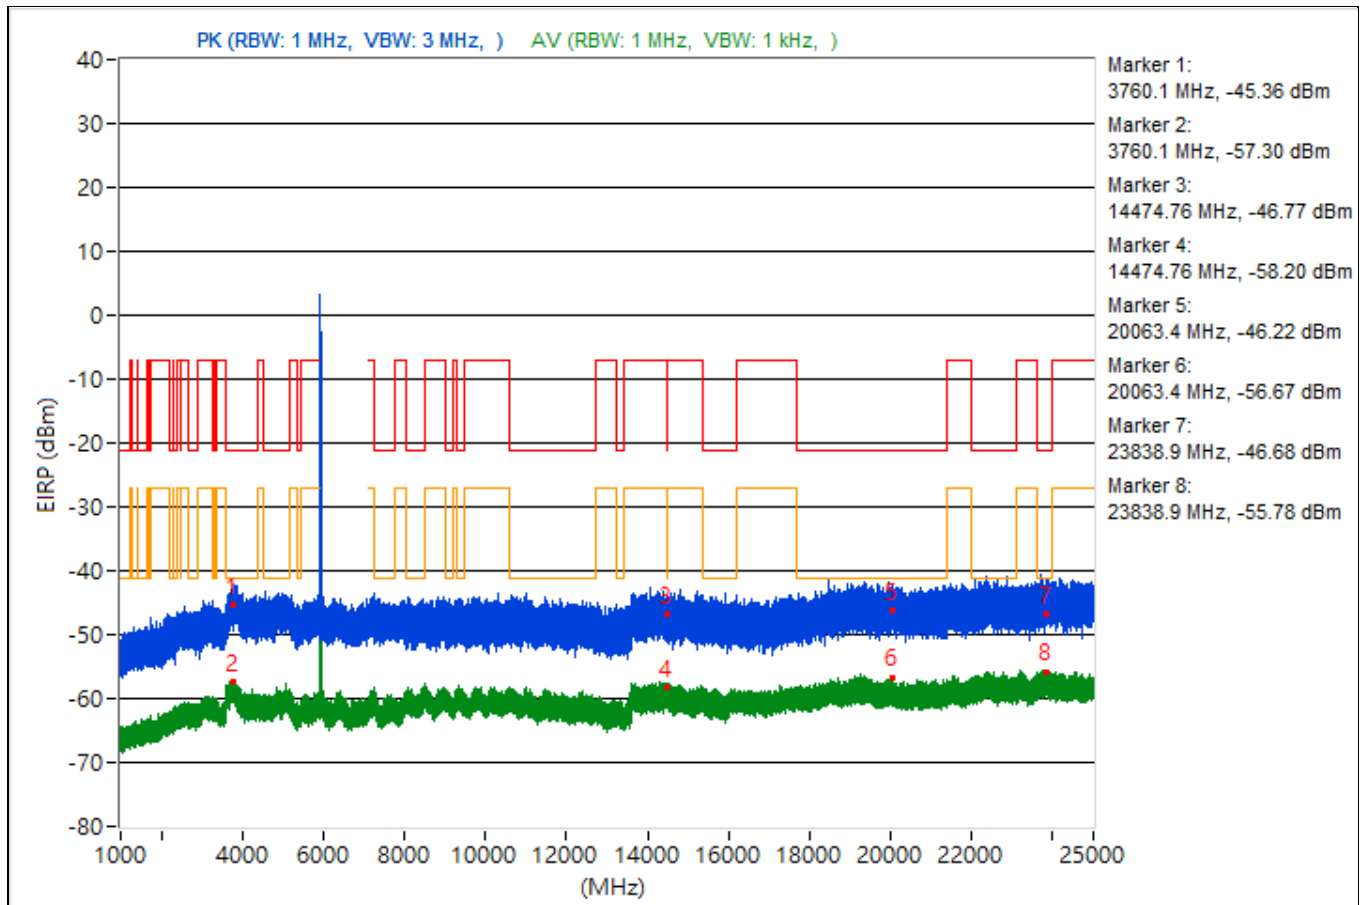


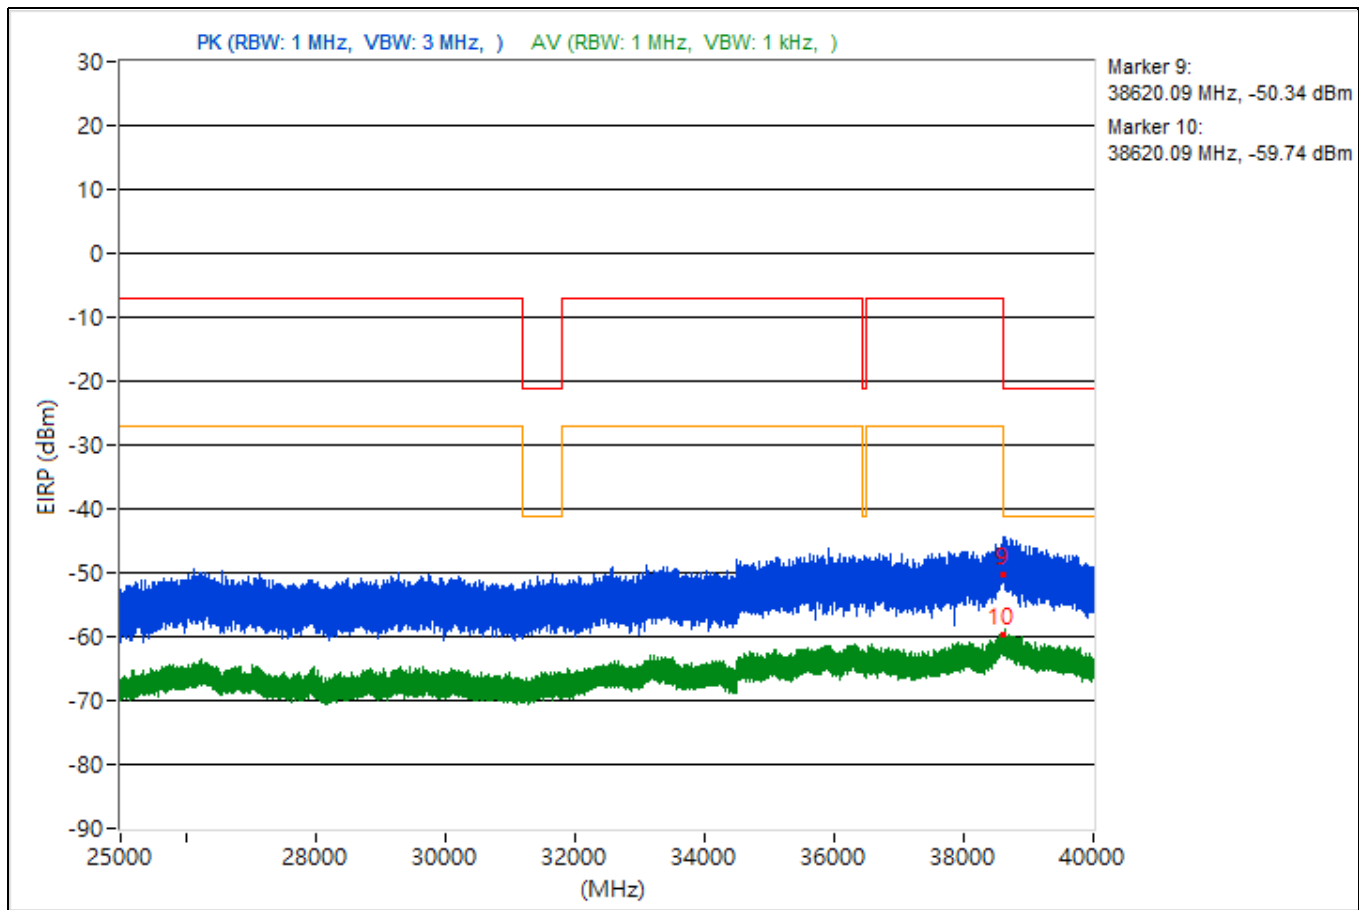


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3827.14	49.8 PK	74	-24.2	-52.36	-54.75	4.92	-45.46
2	3827.14	38.25 AV	54	-15.75	-64.17	-65.87	4.92	-57.01
3	14474.93	49.8 PK	74	-24.2	-55.07	-52.18	4.92	-45.46
4	14474.93	37.32 AV	54	-16.68	-67.33	-64.78	4.92	-57.94
5	19341.9	48.14 PK	74	-25.86	-54.79	-55.32	4.92	-47.12
6	19341.9	38.48 AV	54	-15.52	-66.63	-63.38	4.92	-56.78
7	22308.9	51.57 PK	74	-22.43	-50.29	-53.54	4.92	-43.69
8	22308.9	39.24 AV	54	-14.76	-67.47	-62.03	4.92	-56.02
9	38603.29	47.47 PK	74	-26.53	-54.43	-57.56	4.92	-47.79
10	38603.29	35.98 AV	54	-18.02	-69.71	-65.64	4.92	-59.28

Note: Margin value = Emission Level - Limit value

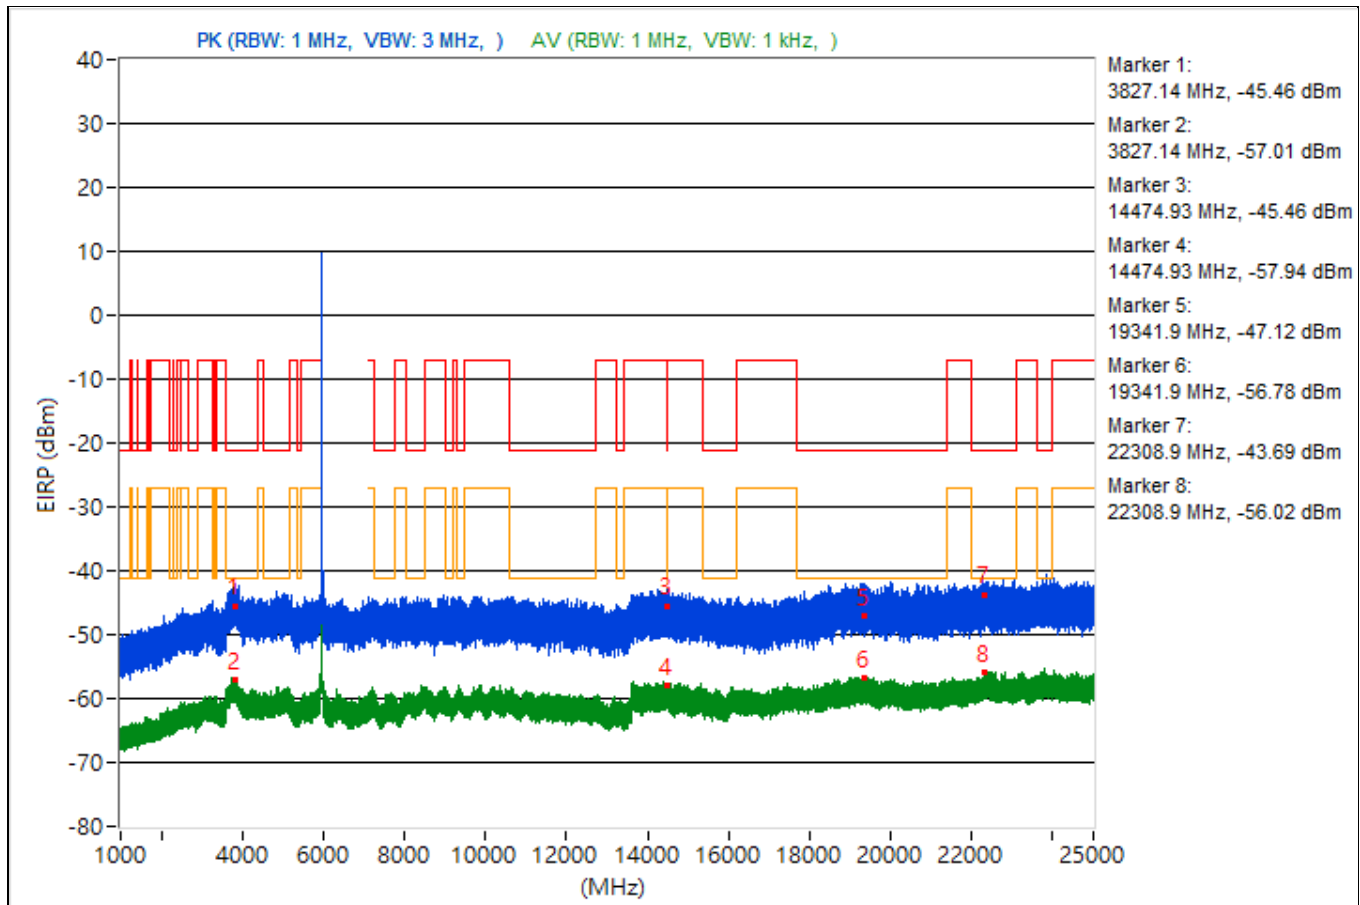


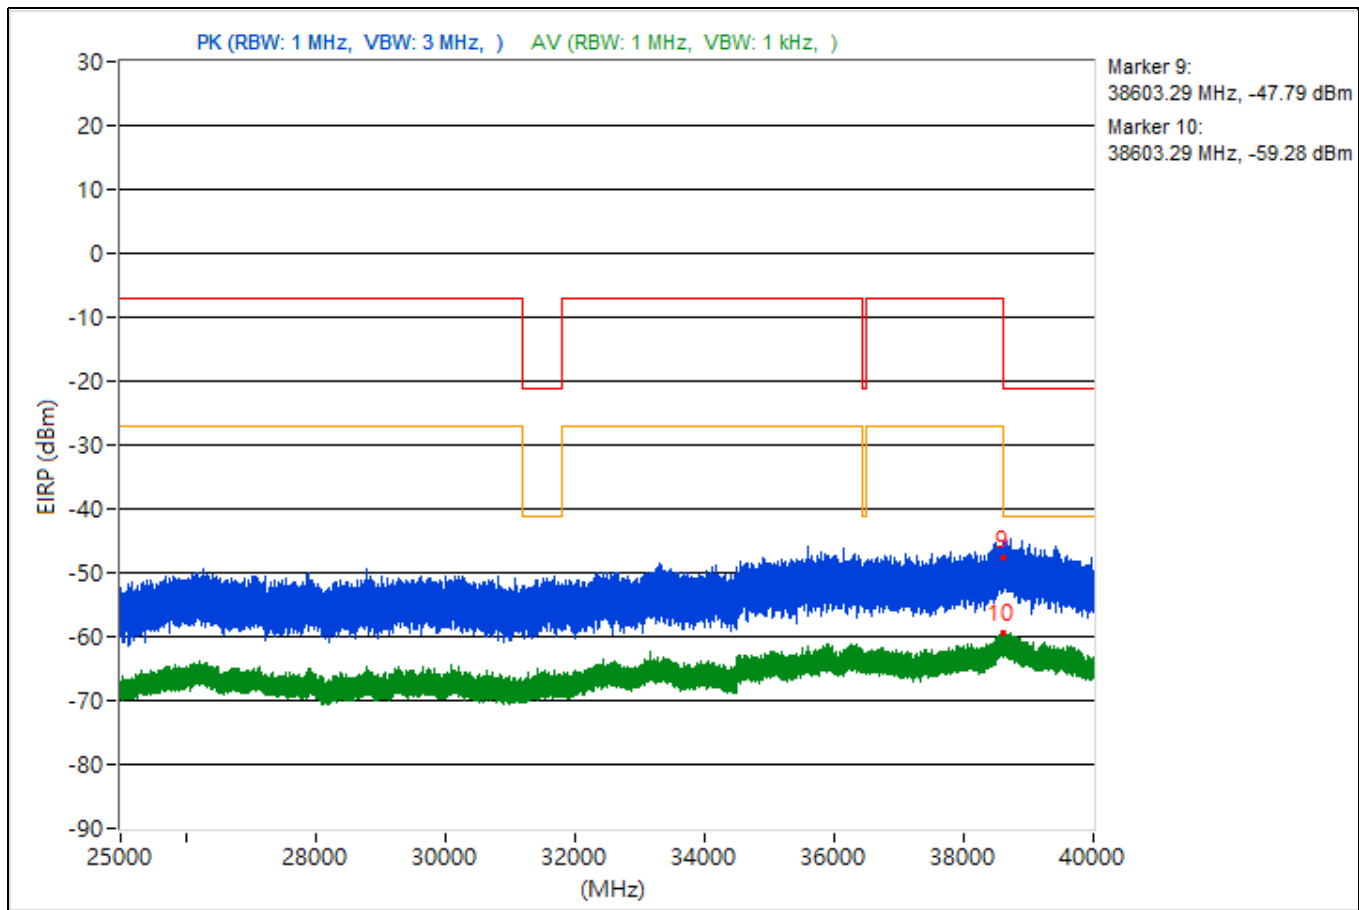


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3759.94	48.91 PK	74	-25.09	-53.69	-54.95	4.92	-46.35
2	3759.94	37.7 AV	54	-16.3	-67.52	-64.11	4.92	-57.56
3	14488.09	47.66 PK	74	-26.34	-56.35	-54.84	4.92	-47.6
4	14488.09	37.67 AV	54	-16.33	-64.53	-66.8	4.92	-57.59
5	19041.7	49.92 PK	74	-24.08	-54.68	-52.2	4.92	-45.34
6	19041.7	38.81 AV	54	-15.19	-66.81	-62.84	4.92	-56.45
7	23824.2	49.13 PK	74	-24.87	-54.29	-53.84	4.92	-46.13
8	23824.2	39.13 AV	54	-14.87	-66.22	-62.63	4.92	-56.13
9	38600.89	47.37 PK	74	-26.63	-55.29	-56.43	4.92	-47.89
10	38600.89	35.99 AV	54	-18.01	-65.69	-69.53	4.92	-59.27

Note: Margin value = Emission Level - Limit value

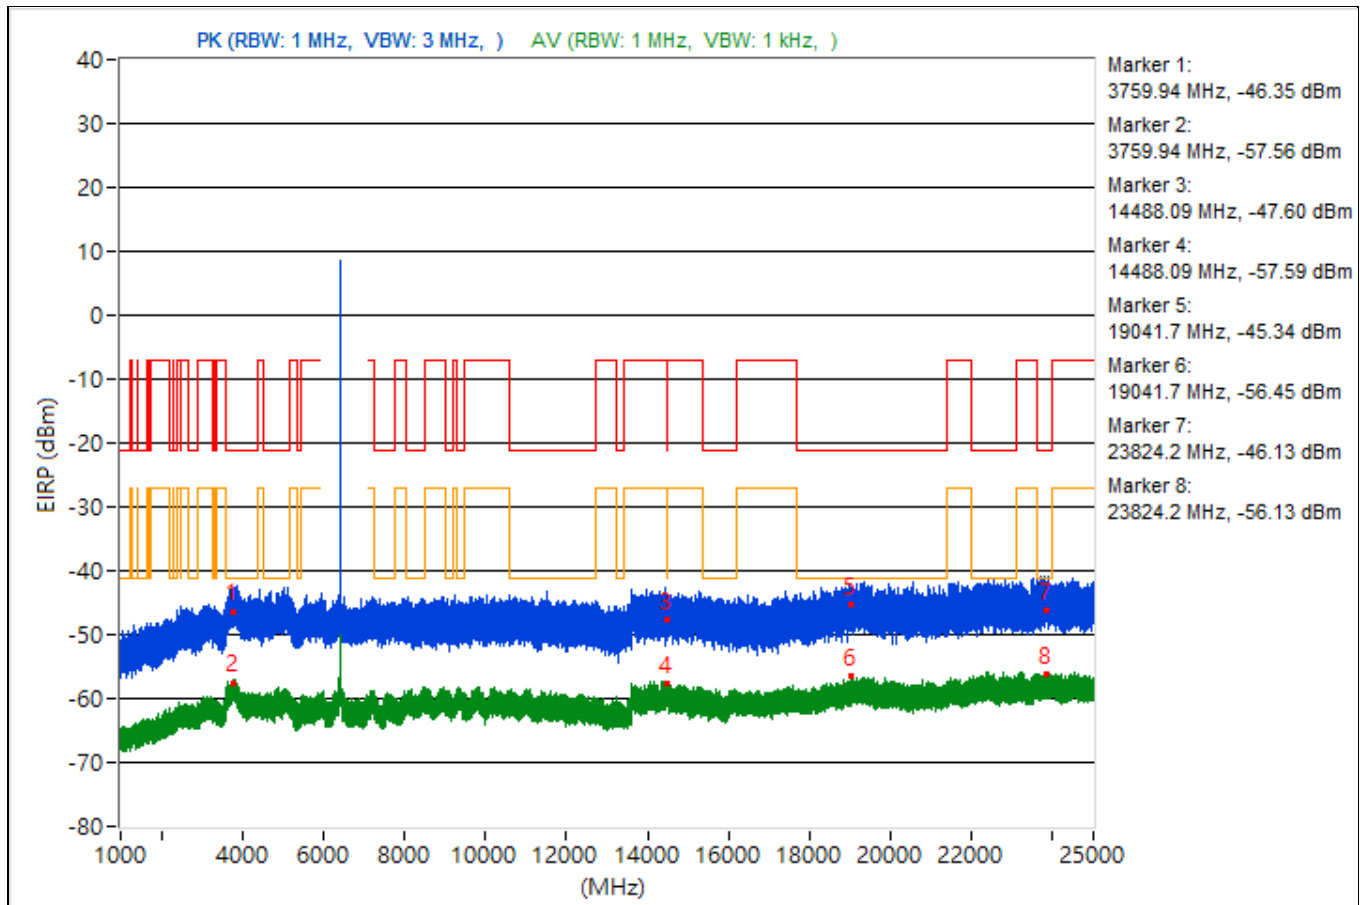


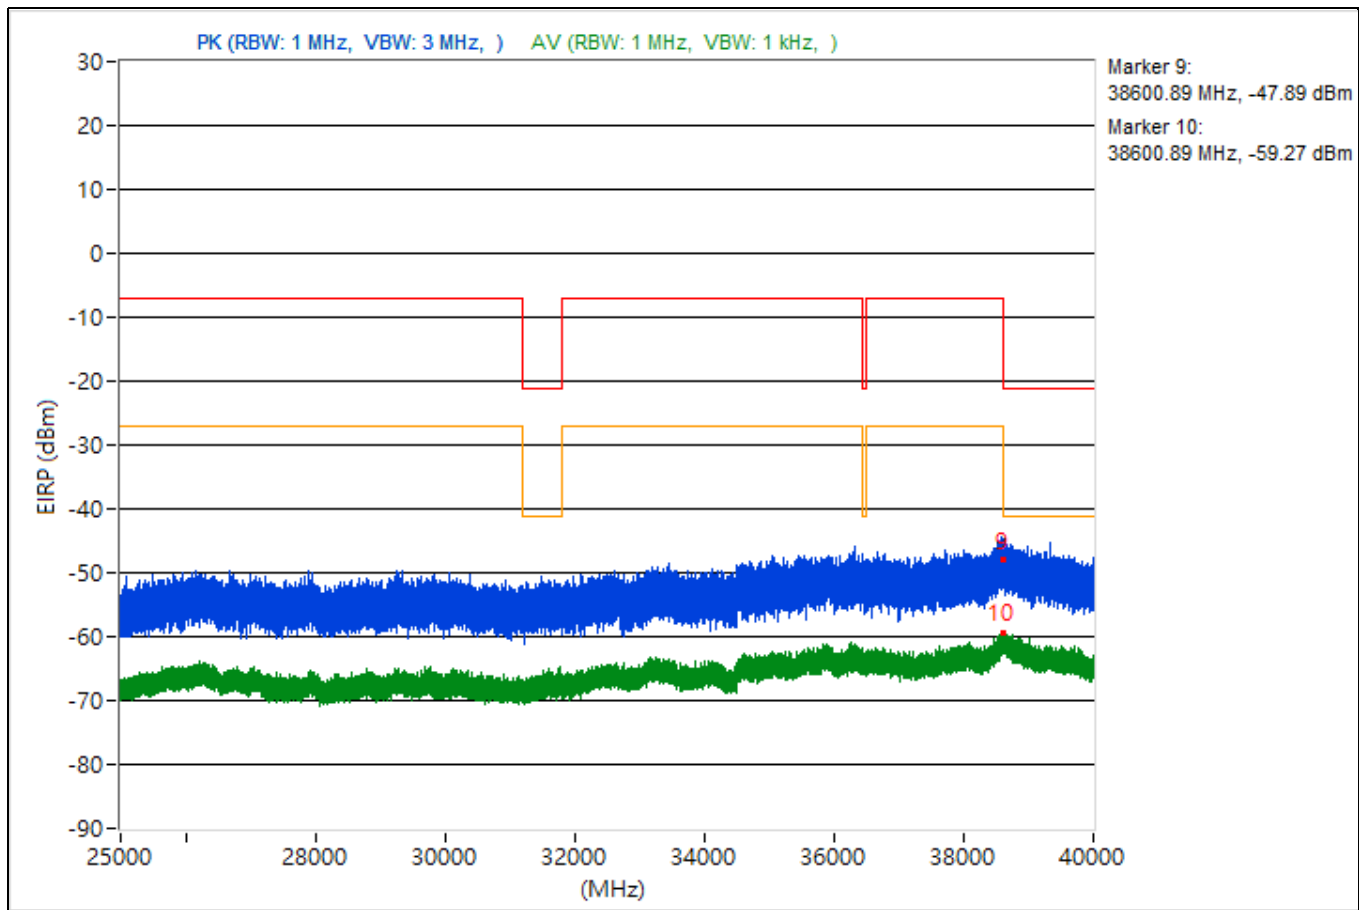


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.81	49.18 PK	74	-24.82	-55.6	-52.85	4.92	-46.08
2	3817.81	38.46 AV	54	-15.54	-65.94	-63.79	4.92	-56.8
3	14479.56	50.08 PK	74	-23.92	-52.74	-53.51	4.92	-45.18
4	14479.56	37.2 AV	54	-16.8	-67.26	-65.01	4.92	-58.06
5	19380.7	50.09 PK	74	-23.91	-51.57	-55.48	4.92	-45.17
6	19380.7	38.38 AV	54	-15.62	-63.36	-67.01	4.92	-56.88
7	23828.8	48.44 PK	74	-25.56	-54.46	-55.07	4.92	-46.82
8	23828.8	38.9 AV	54	-15.1	-62.85	-66.46	4.92	-56.36
9	38603.91	45.19 PK	74	-28.81	-59.75	-56.75	4.92	-50.07
10	38603.91	36.63 AV	54	-17.37	-66.05	-67.14	4.92	-58.63

Note: Margin value = Emission Level - Limit value

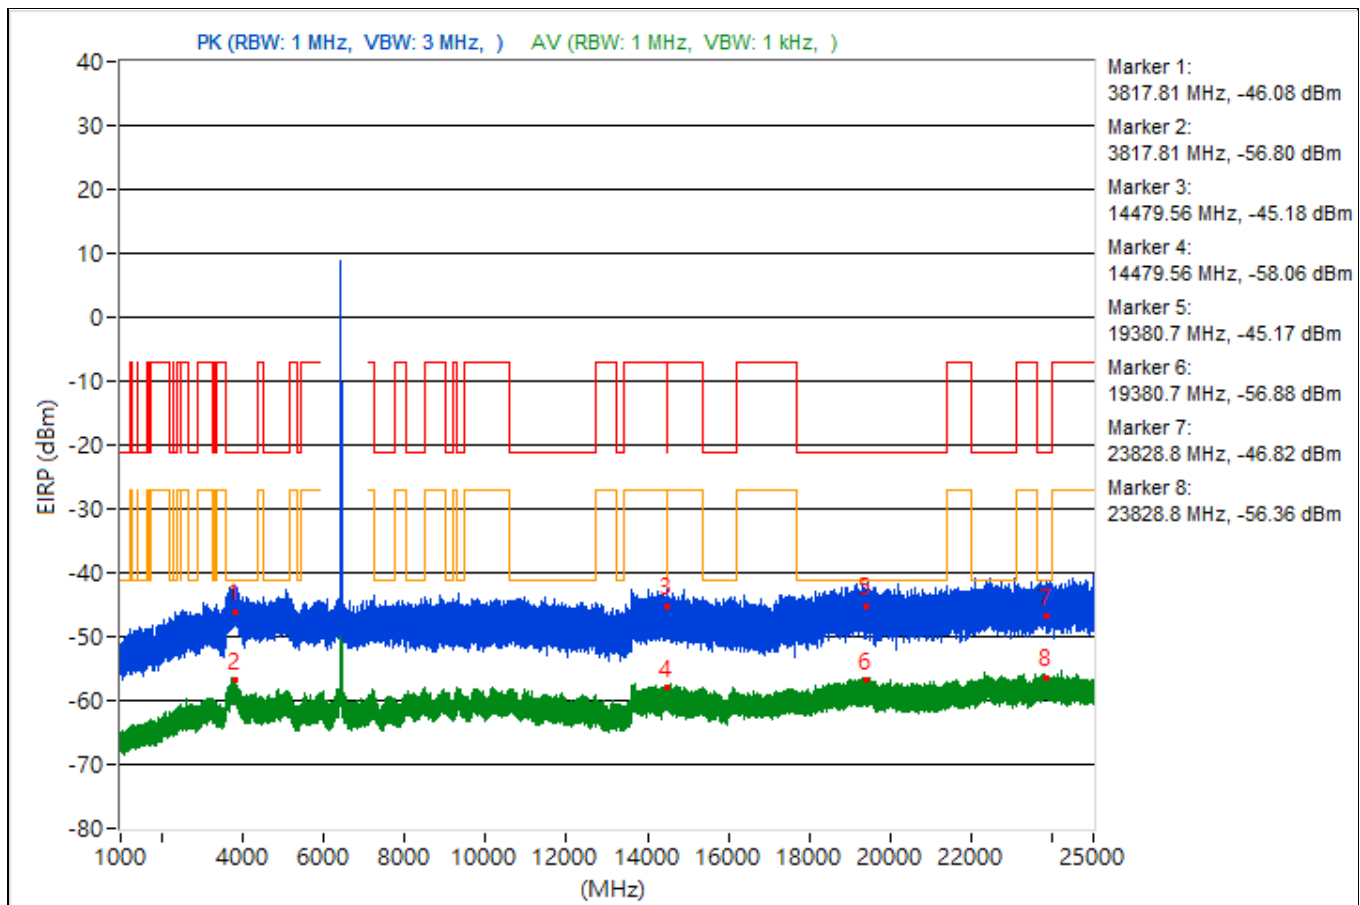


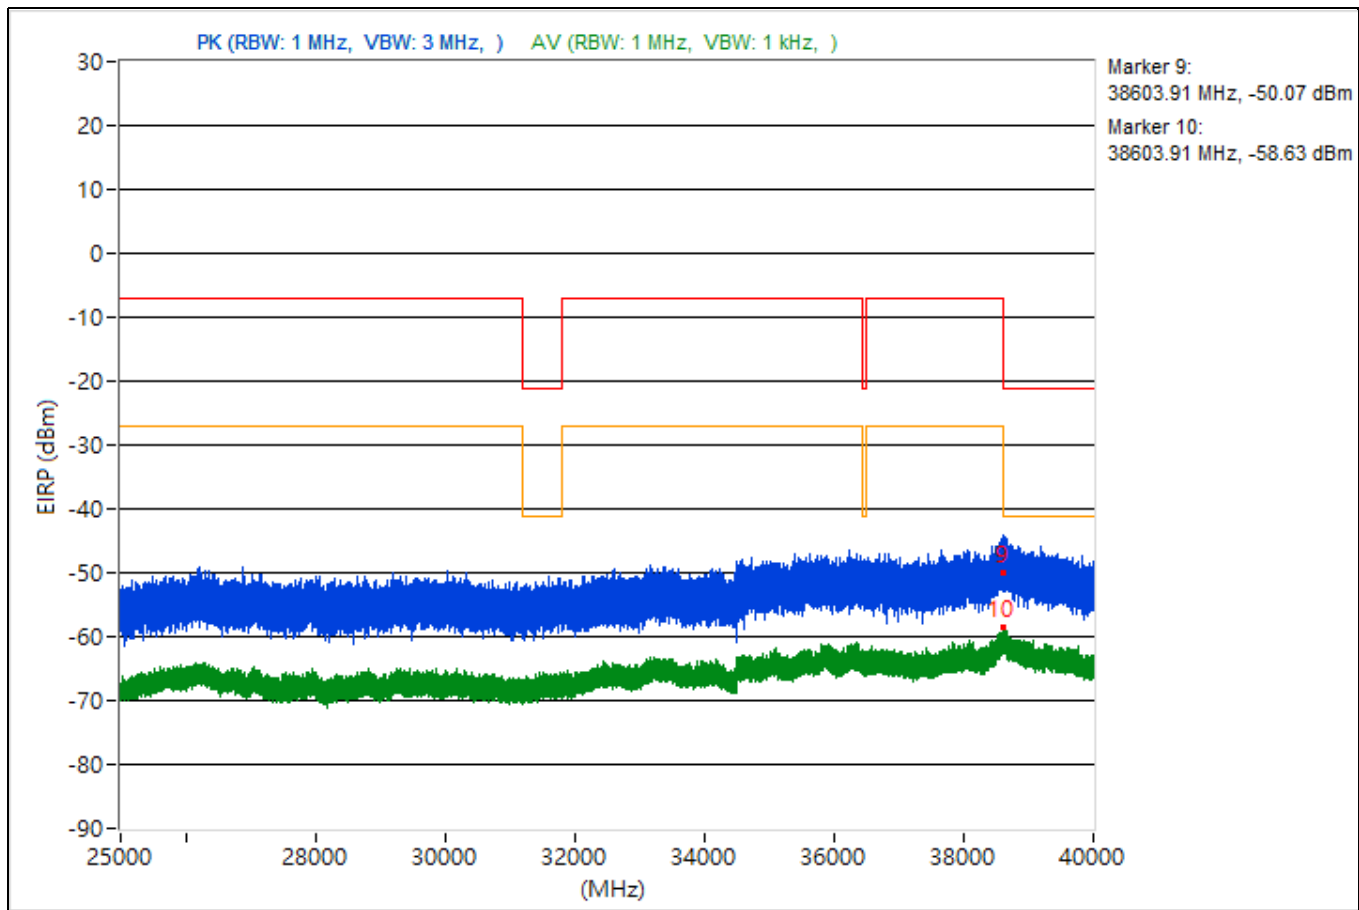


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.87	47.82 PK	74	-26.18	-56.8	-54.29	4.92	-47.44
2	3815.87	37.94 AV	54	-16.06	-66.14	-64.51	4.92	-57.32
3	14488.44	45.98 PK	74	-28.02	-57.39	-57.04	4.92	-49.28
4	14488.44	37.01 AV	54	-16.99	-64.81	-68.2	4.92	-58.25
5	19480.2	49.77 PK	74	-24.23	-53.79	-53.08	4.92	-45.49
6	19480.2	39.14 AV	54	-14.86	-62.39	-66.77	4.92	-56.12
7	23868.7	49.08 PK	74	-24.92	-53.44	-54.9	4.92	-46.18
8	23868.7	39.49 AV	54	-14.51	-62.46	-65.43	4.92	-55.77
9	38604.09	45.1 PK	74	-28.9	-59.22	-57.19	4.92	-50.16
10	38604.09	35.42 AV	54	-18.58	-66.36	-69.85	4.92	-59.84

Note: Margin value = Emission Level - Limit value

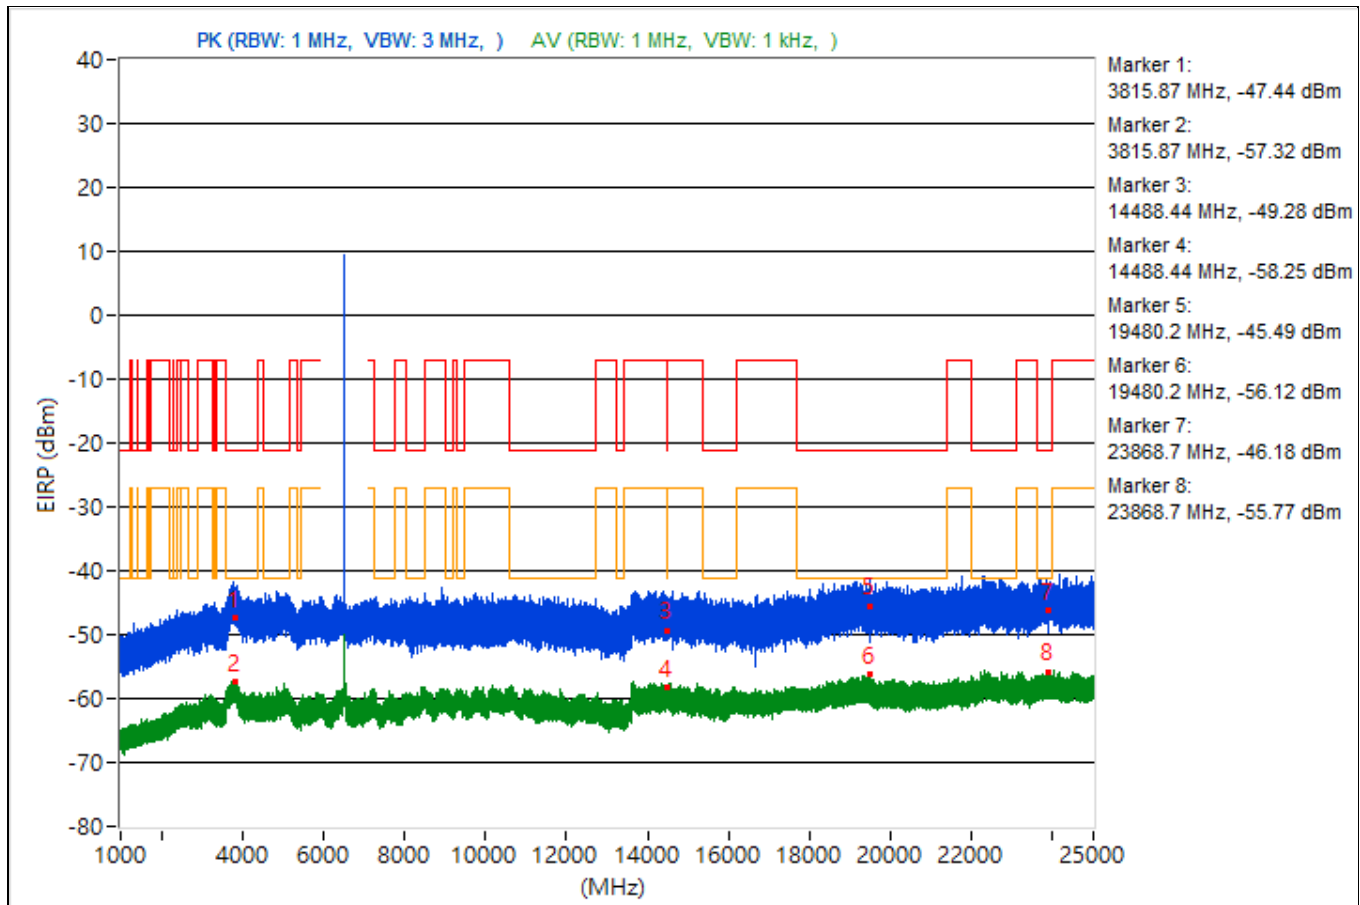


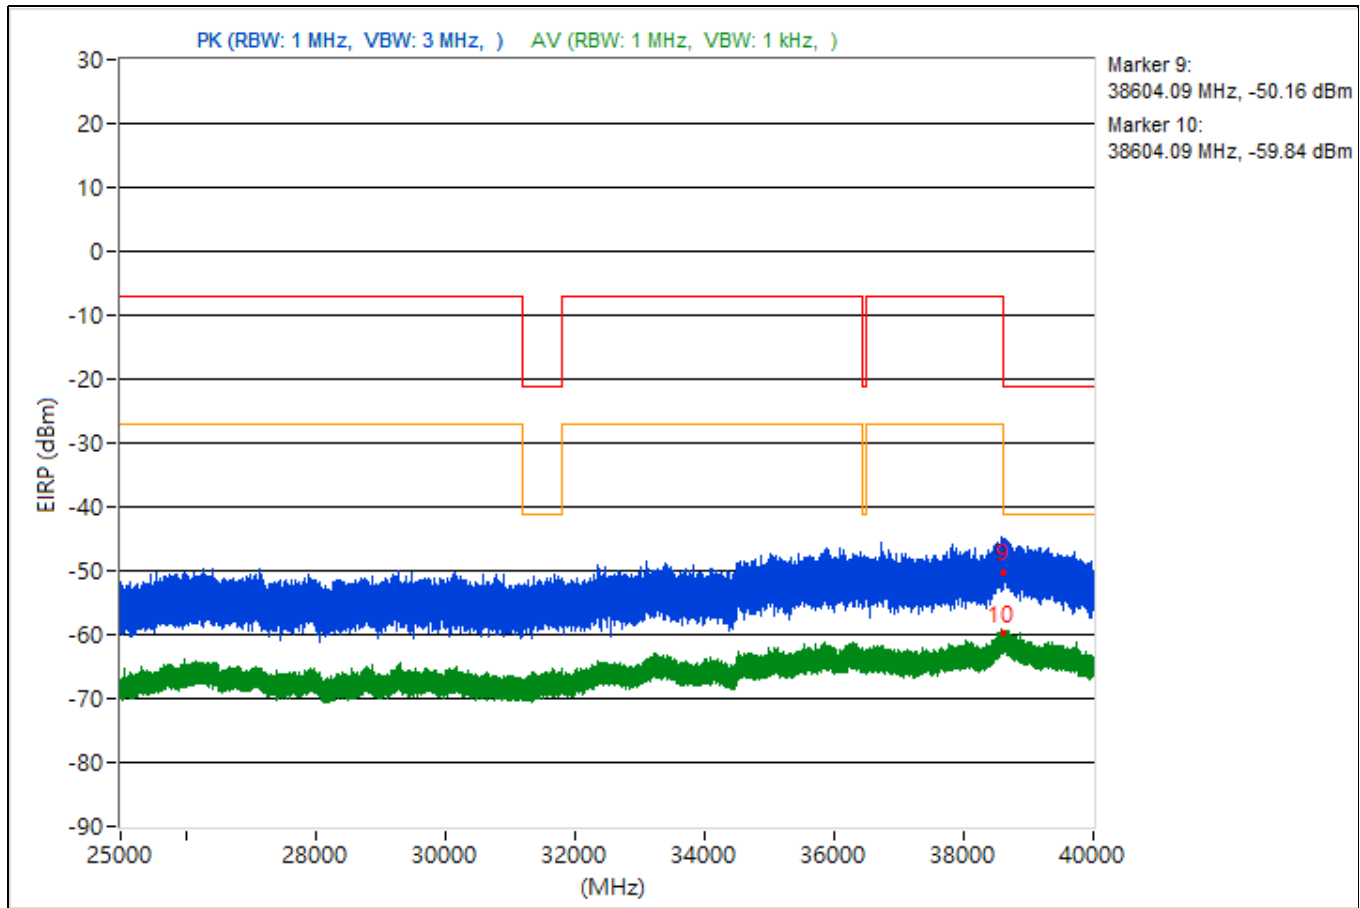


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.09	50.62 PK	74	-23.38	-54.17	-51.4	4.92	-44.64
2	3815.09	38.24 AV	54	-15.76	-63.8	-66.53	4.92	-57.02
3	14479.29	49.05 PK	74	-24.95	-52.57	-56.64	4.92	-46.21
4	14479.29	37.38 AV	54	-16.62	-65.04	-66.76	4.92	-57.88
5	19016	50.54 PK	74	-23.46	-51.82	-53.69	4.92	-44.72
6	19016	38.18 AV	54	-15.82	-63.03	-68.77	4.92	-57.08
7	22411.6	49.07 PK	74	-24.93	-53.44	-54.94	4.92	-46.19
8	22411.6	39.02 AV	54	-14.98	-67.72	-62.25	4.92	-56.24
9	38661.33	45.19 PK	74	-28.81	-58.56	-57.5	4.92	-50.07
10	38661.33	35.97 AV	54	-18.03	-66.32	-68.37	4.92	-59.29

Note: Margin value = Emission Level - Limit value

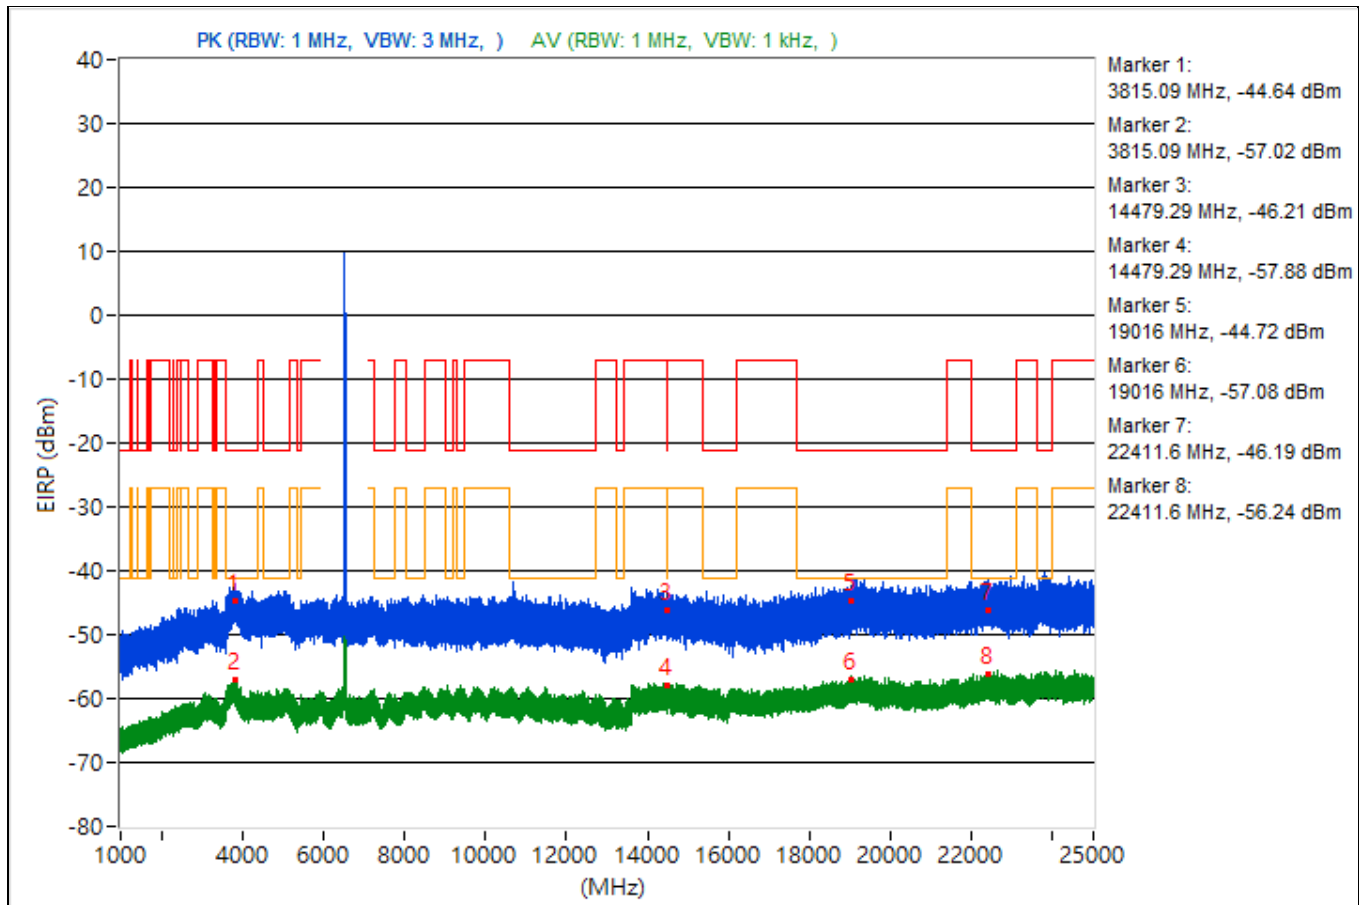


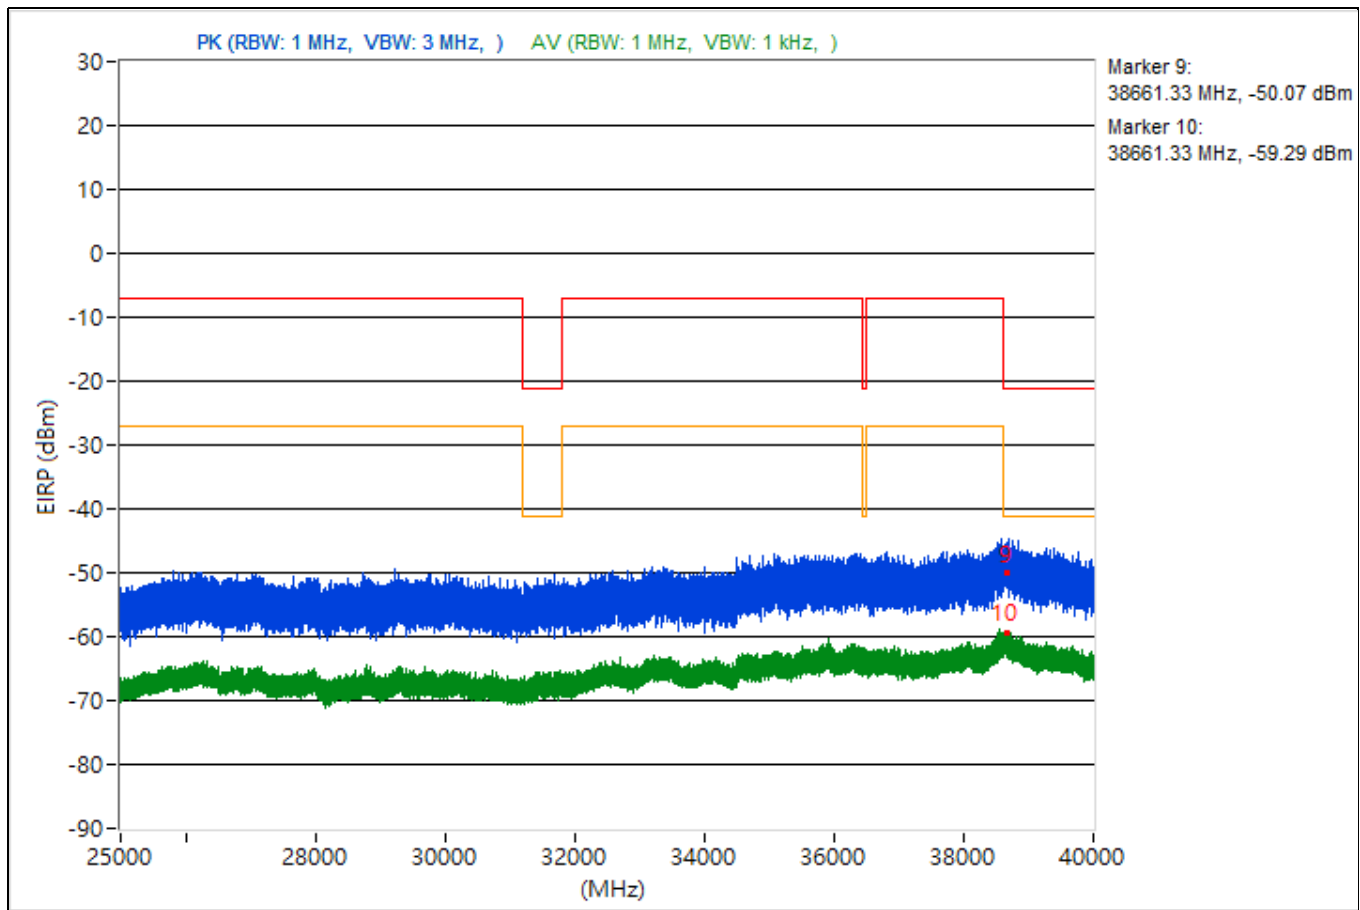


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3866.66	51.09 PK	74	-22.91	-53.27	-51.18	4.92	-44.17
2	3866.66	37.53 AV	54	-16.47	-68.2	-64.08	4.92	-57.73
3	14479.82	48.98 PK	74	-25.02	-54.82	-53.68	4.92	-46.28
4	14479.82	37.86 AV	54	-16.14	-64.96	-65.73	4.92	-57.4
5	19414.3	48.94 PK	74	-25.06	-54.34	-54.16	4.92	-46.32
6	19414.3	38.52 AV	54	-15.48	-63.17	-66.96	4.92	-56.74
7	22770.2	48.5 PK	74	-25.5	-55.03	-54.38	4.92	-46.76
8	22770.2	39.05 AV	54	-14.95	-66.55	-62.6	4.92	-56.21
9	38606.76	46.95 PK	74	-27.05	-54.22	-60.14	4.92	-48.31
10	38606.76	36.08 AV	54	-17.92	-65.71	-69.17	4.92	-59.18

Note: Margin value = Emission Level - Limit value

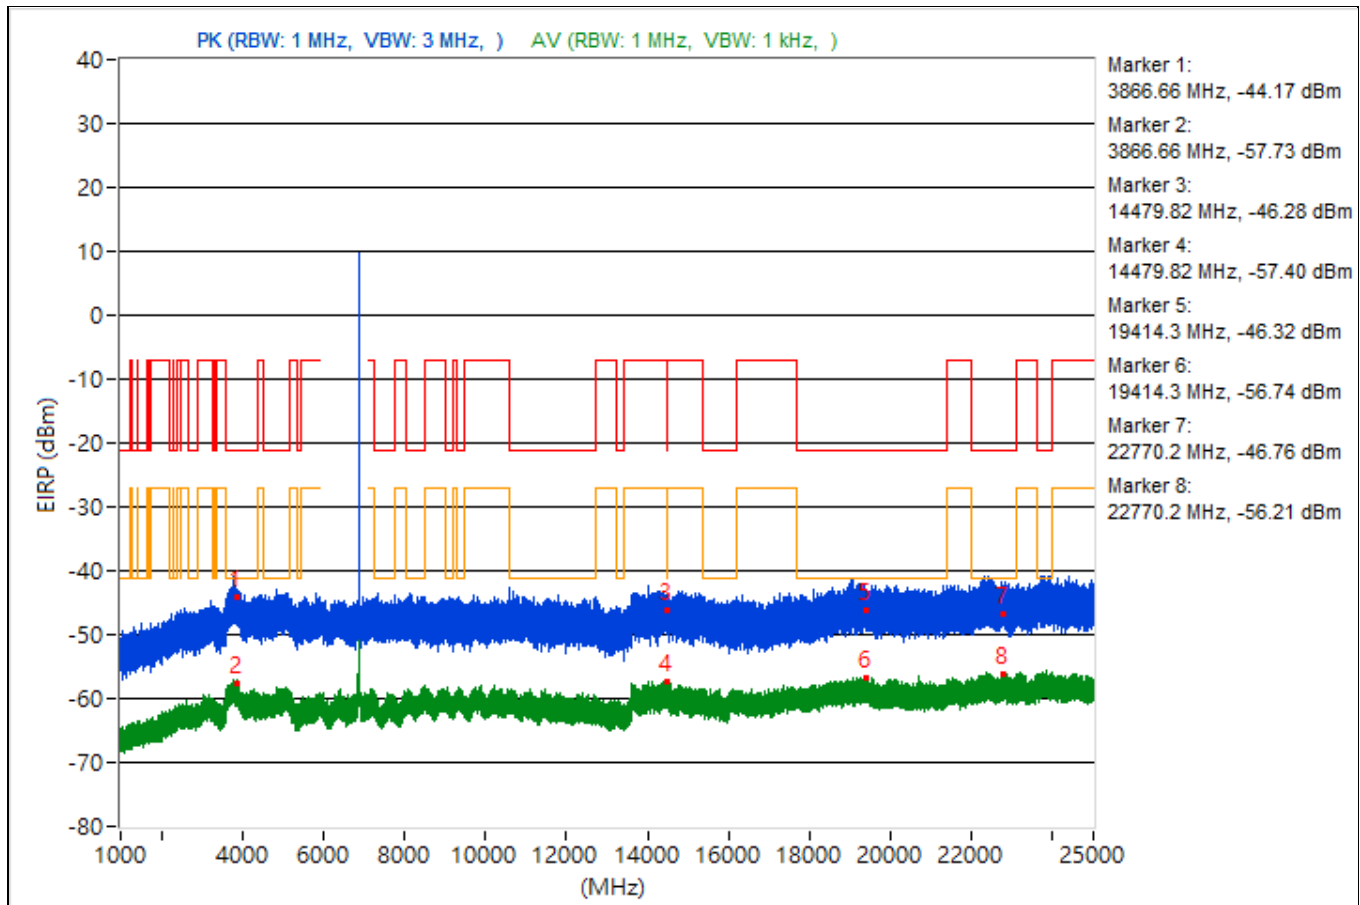


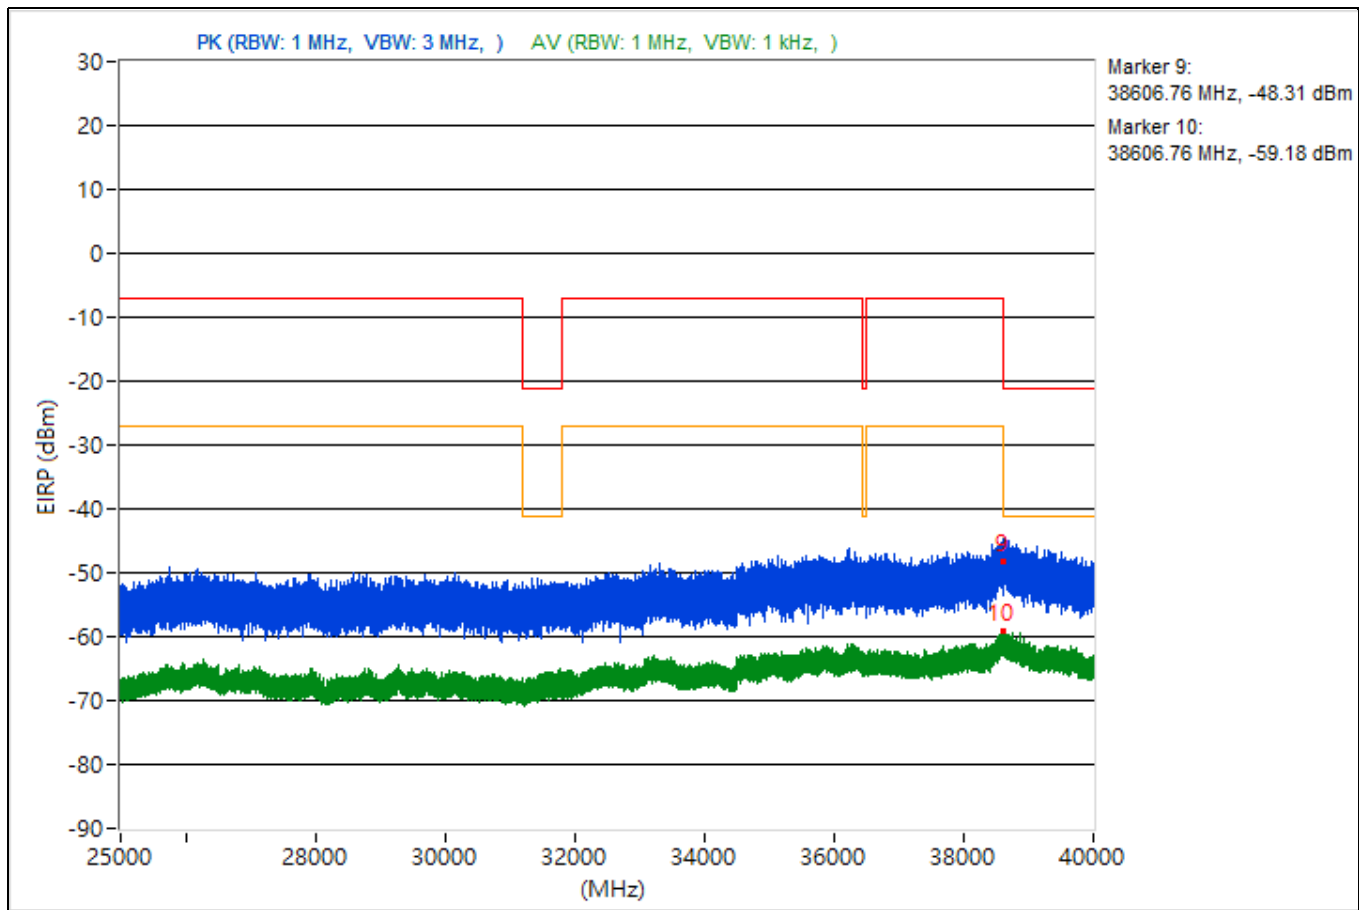


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.8	50.3 PK	74	-23.7	-51.21	-55.65	4.92	-44.96
2	3802.8	38.18 AV	54	-15.82	-63.86	-66.59	4.92	-57.08
3	14494.93	49.24 PK	74	-24.76	-53.58	-54.36	4.92	-46.02
4	14494.93	37.27 AV	54	-16.73	-64.63	-67.75	4.92	-57.99
5	19138.5	49.27 PK	74	-24.73	-52.68	-55.64	4.92	-45.99
6	19138.5	38.14 AV	54	-15.86	-63.53	-67.41	4.92	-57.12
7	22382.4	50.53 PK	74	-23.47	-52.82	-52.5	4.92	-44.73
8	22382.4	39.17 AV	54	-14.83	-65.83	-62.75	4.92	-56.09
9	38626.67	46.89 PK	74	-27.11	-55.23	-57.71	4.92	-48.37
10	38626.67	35.91 AV	54	-18.09	-68.77	-66.18	4.92	-59.35

Note: Margin value = Emission Level - Limit value

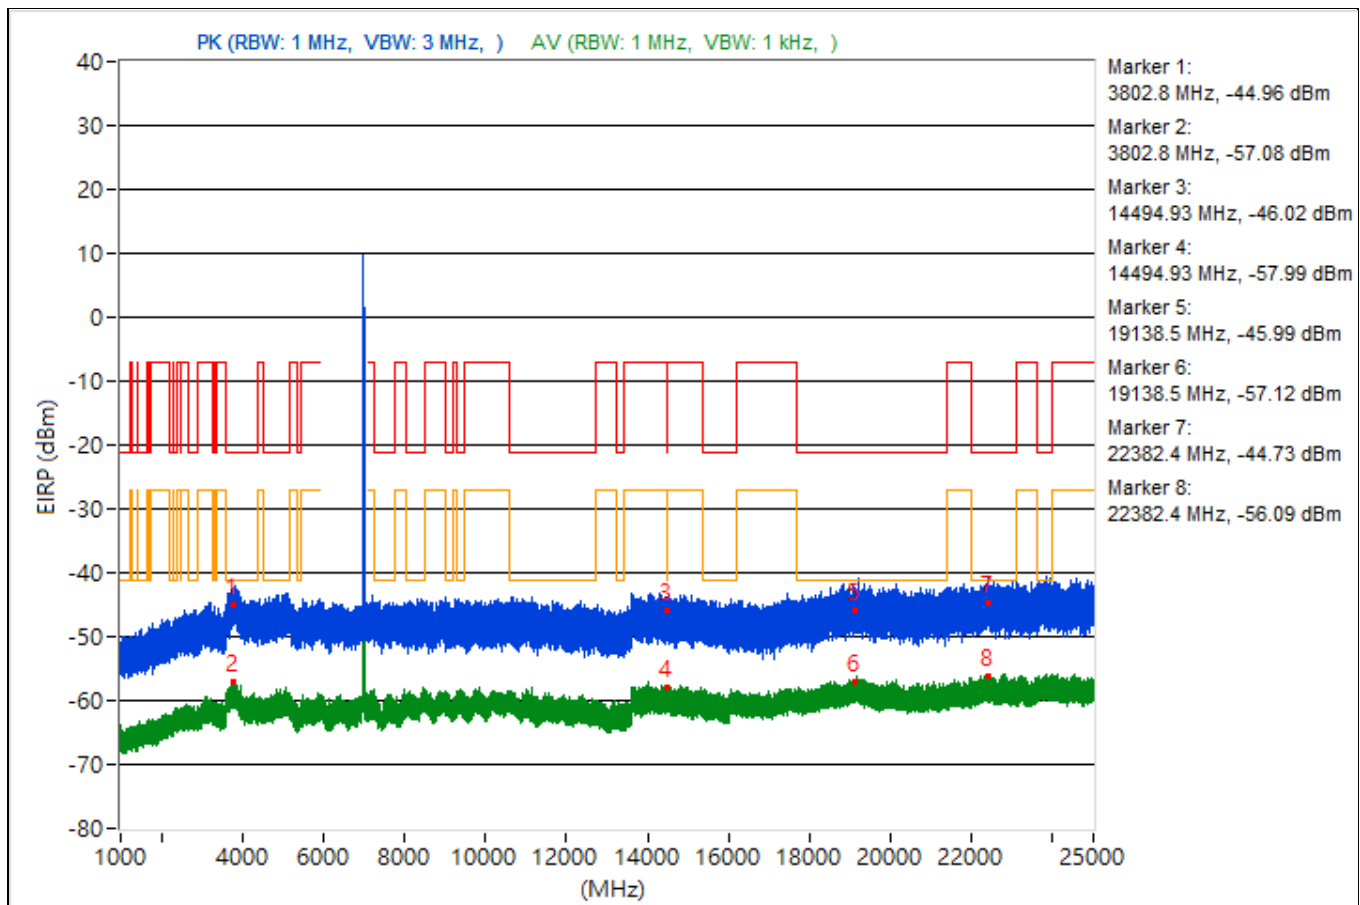


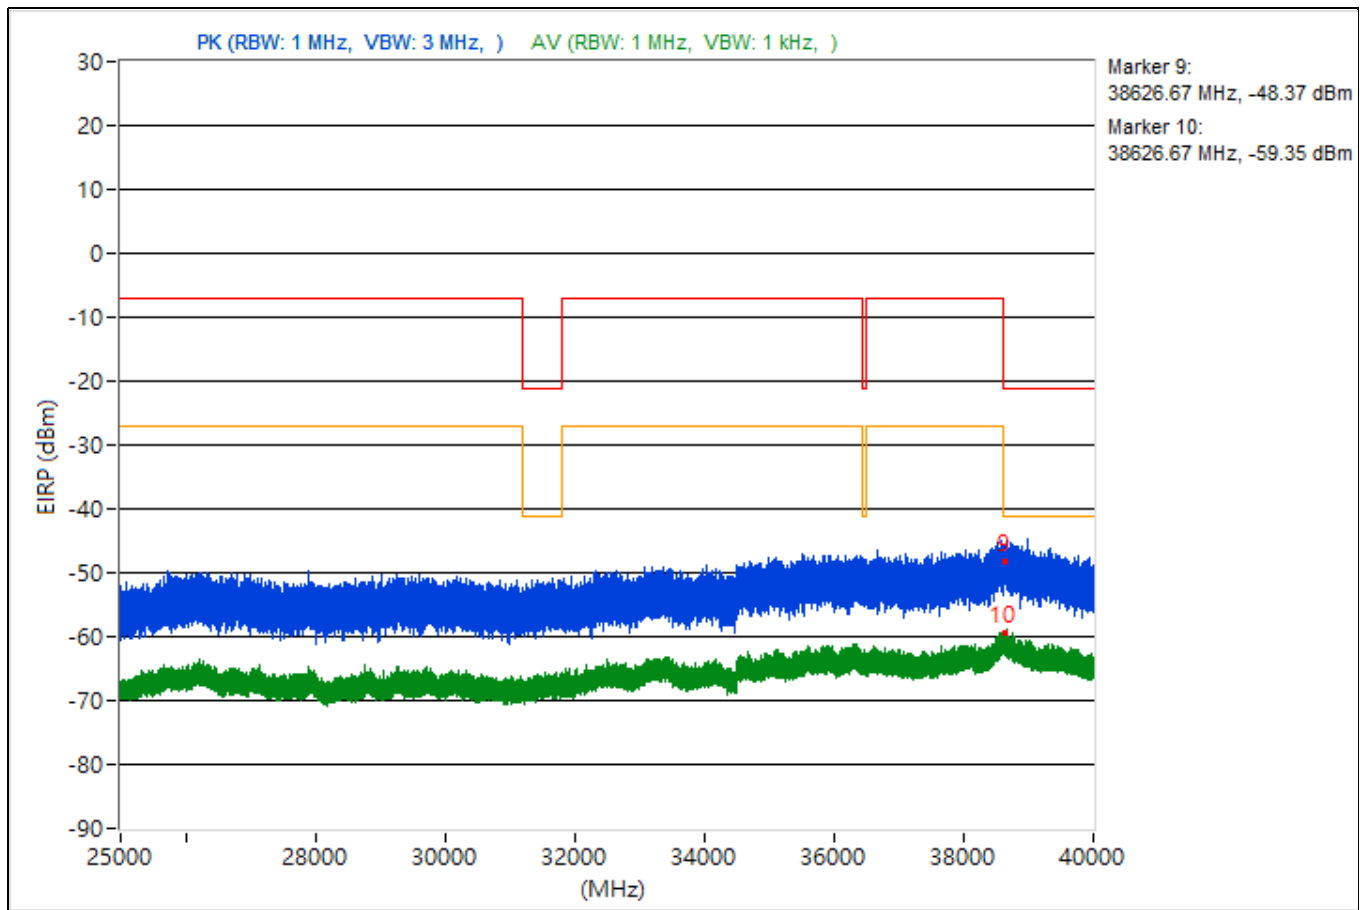


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.23	49.54 PK	74	-24.46	-54.75	-52.78	4.92	-45.72
2	3828.23	38.55 AV	54	-15.45	-65.74	-63.77	4.92	-56.71
3	14477.24	47.12 PK	74	-26.88	-55.39	-56.87	4.92	-48.14
4	14477.24	37.7 AV	54	-16.3	-66.37	-64.76	4.92	-57.56
5	19193.5	48.1 PK	74	-25.9	-56.14	-54.25	4.92	-47.16
6	19193.5	38.95 AV	54	-15.05	-64.86	-63.69	4.92	-56.31
7	22805.7	46.99 PK	74	-27.01	-55.87	-56.55	4.92	-48.27
8	22805.7	39.22 AV	54	-14.78	-62.81	-65.55	4.92	-56.04
9	38622.93	45.52 PK	74	-28.48	-56.55	-59.2	4.92	-49.74
10	38622.93	36.1 AV	54	-17.9	-68.23	-66.19	4.92	-59.16

Note: Margin value = Emission Level - Limit value

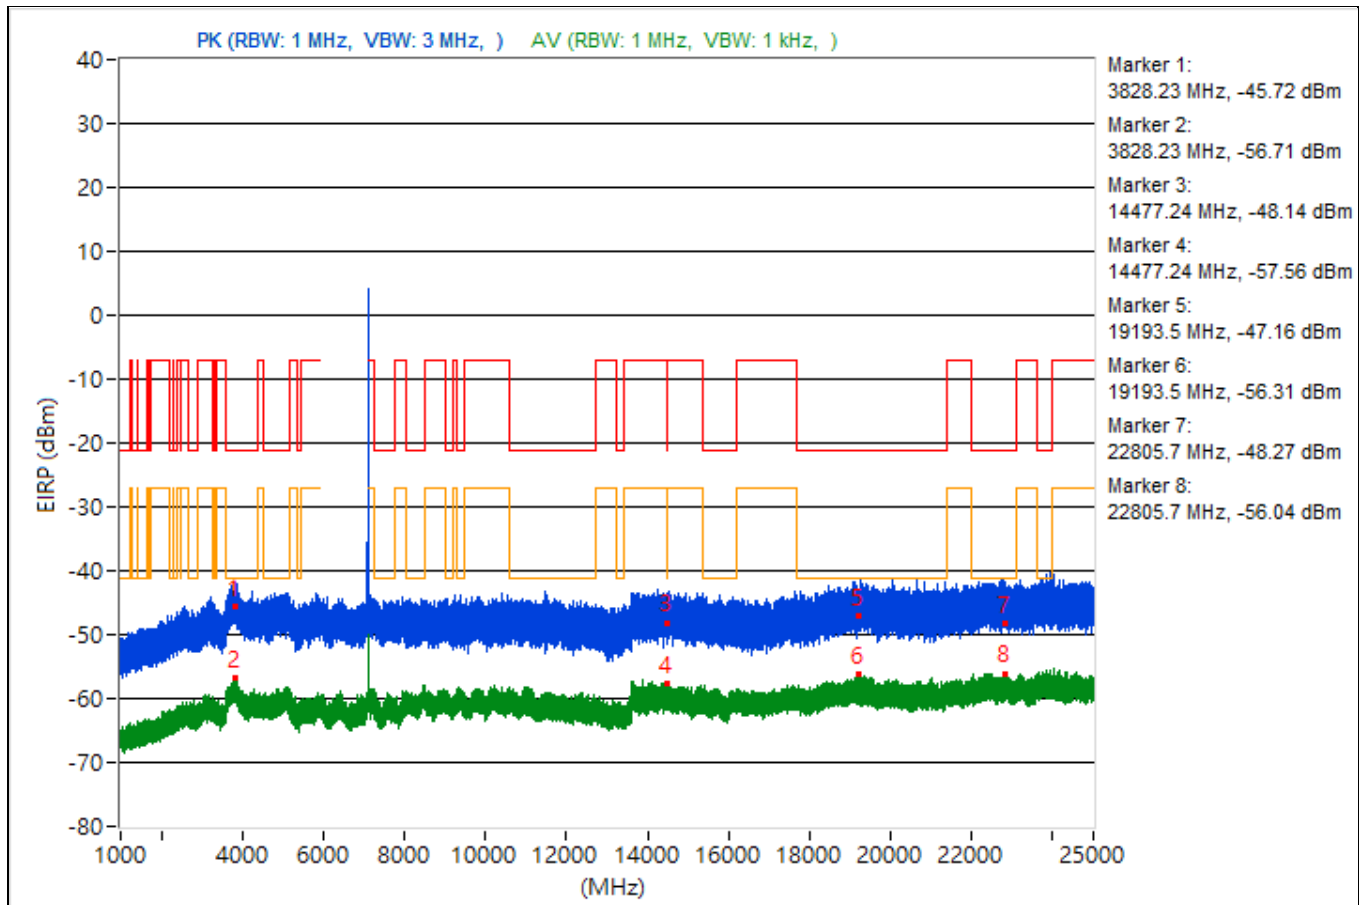


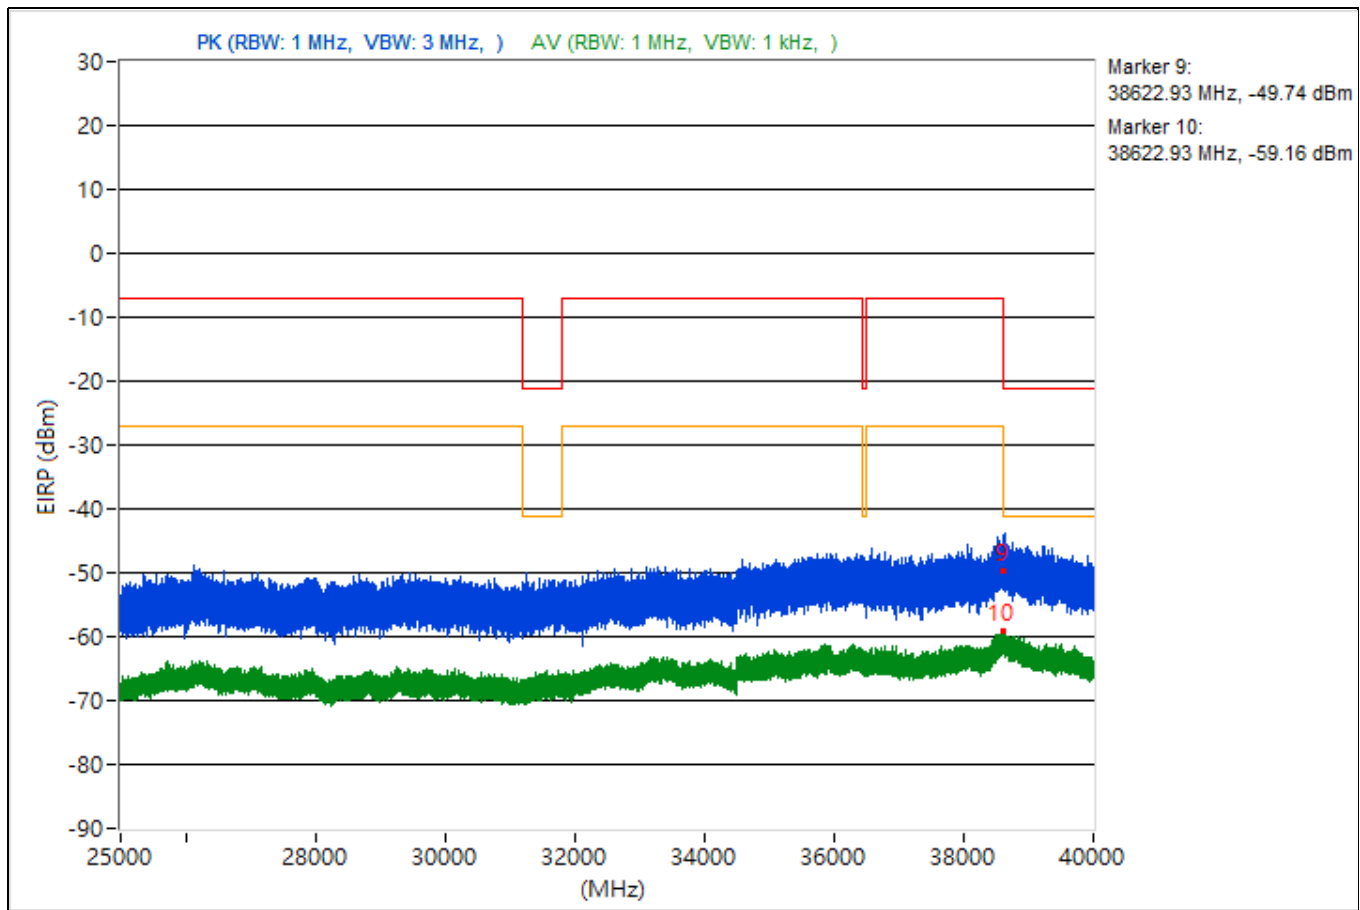


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.49	50.3 PK	74	-23.7	-51.03	-56.18	4.92	-44.96
2	3823.49	37.76 AV	54	-16.24	-67.26	-64.15	4.92	-57.5
3	8456	45.37 PK	74	-28.63	-57.68	-57.97	4.92	-49.89
4	8456	37.23 AV	54	-16.77	-67.45	-64.85	4.92	-58.03
5	19132.2	49.87 PK	74	-24.13	-51.82	-55.62	4.92	-45.39
6	19132.2	38.27 AV	54	-15.73	-66.84	-63.59	4.92	-56.99
7	23840.7	48.3 PK	74	-25.7	-53.64	-56.66	4.92	-46.96
8	23840.7	39.52 AV	54	-14.48	-65.17	-62.56	4.92	-55.74
9	38633.87	46.86 PK	74	-27.14	-56.3	-56.35	4.92	-48.4
10	38633.87	36.1 AV	54	-17.9	-65.99	-68.57	4.92	-59.16

Note: Margin value = Emission Level - Limit value

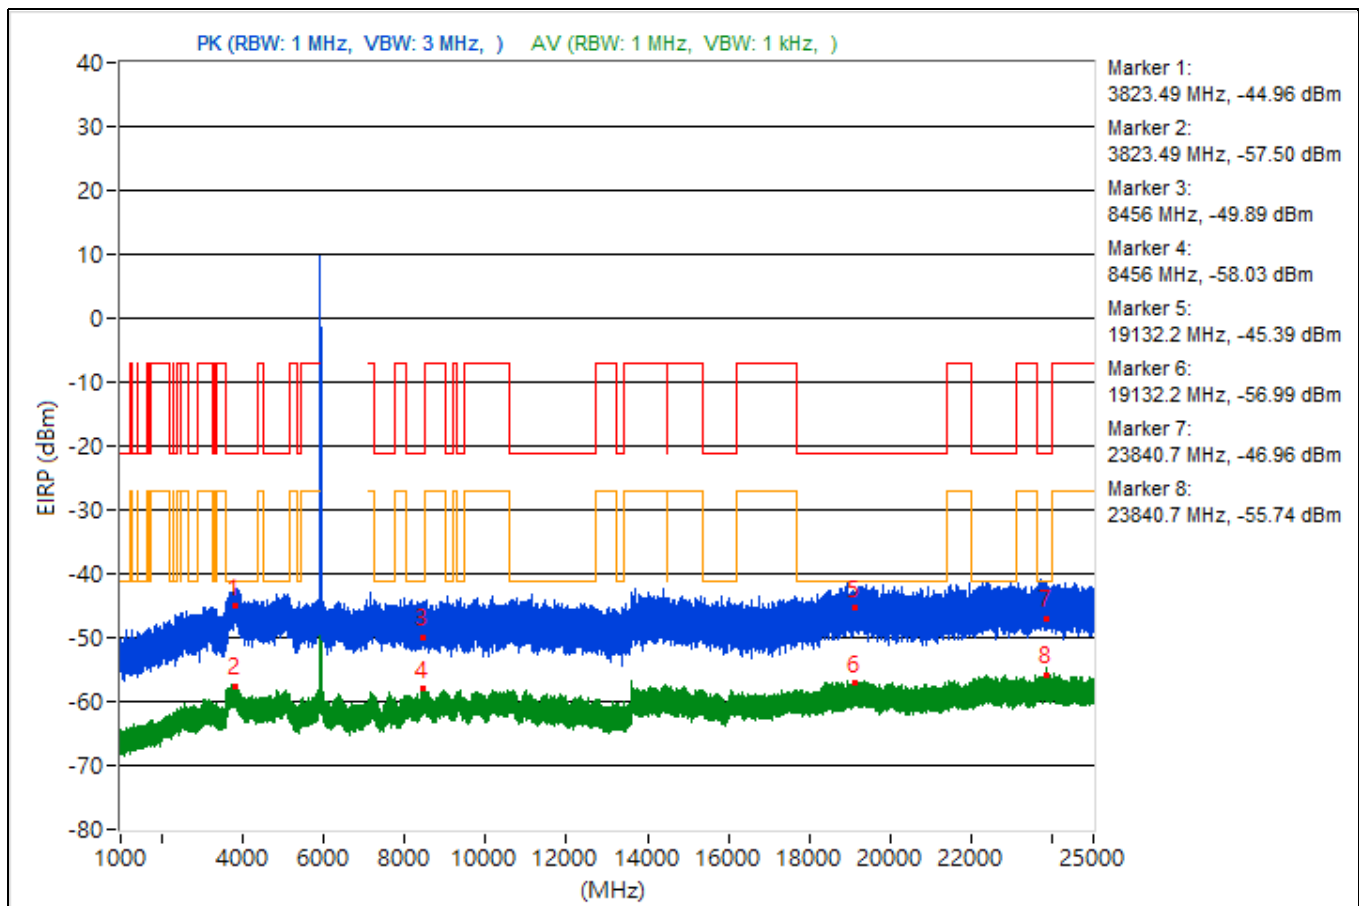


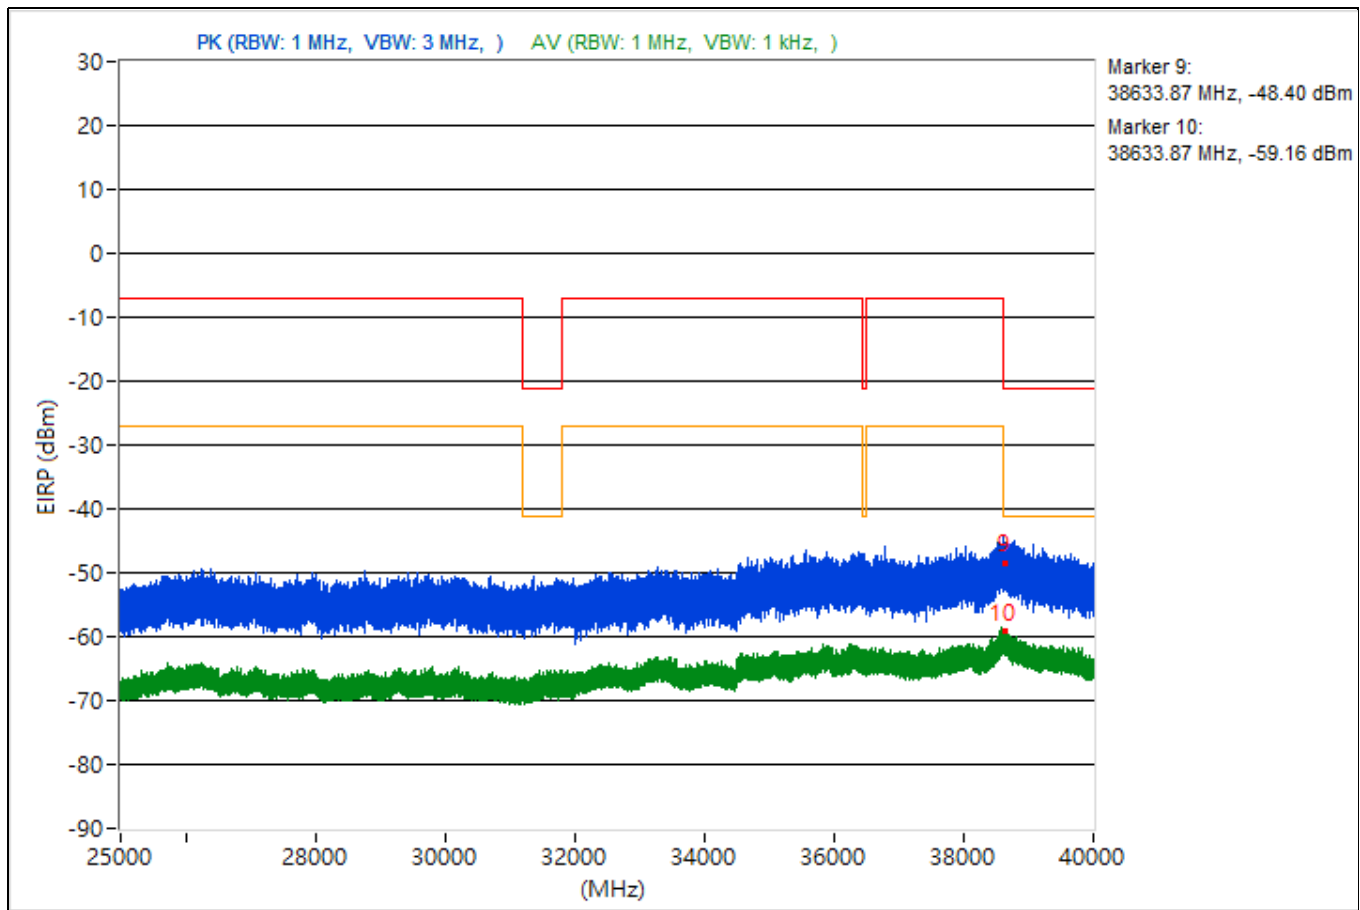


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.29	49.48 PK	74	-24.52	-53.32	-54.13	4.92	-45.78
2	3770.29	38.16 AV	54	-15.84	-64.3	-65.92	4.92	-57.1
3	14474.84	46.53 PK	74	-27.47	-56.03	-57.41	4.92	-48.73
4	14474.84	36.89 AV	54	-17.11	-68.22	-64.98	4.92	-58.37
5	19453.6	50.01 PK	74	-23.99	-53.29	-53.07	4.92	-45.25
6	19453.6	38.68 AV	54	-15.32	-65.81	-63.52	4.92	-56.58
7	23715.5	49.64 PK	74	-24.36	-52.64	-54.7	4.92	-45.62
8	23715.5	39.95 AV	54	-14.05	-64.77	-62.1	4.92	-55.31
9	38638.49	46.66 PK	74	-27.34	-54.81	-59.4	4.92	-48.6
10	38638.49	36.45 AV	54	-17.55	-66.22	-67.33	4.92	-58.81

Note: Margin value = Emission Level - Limit value

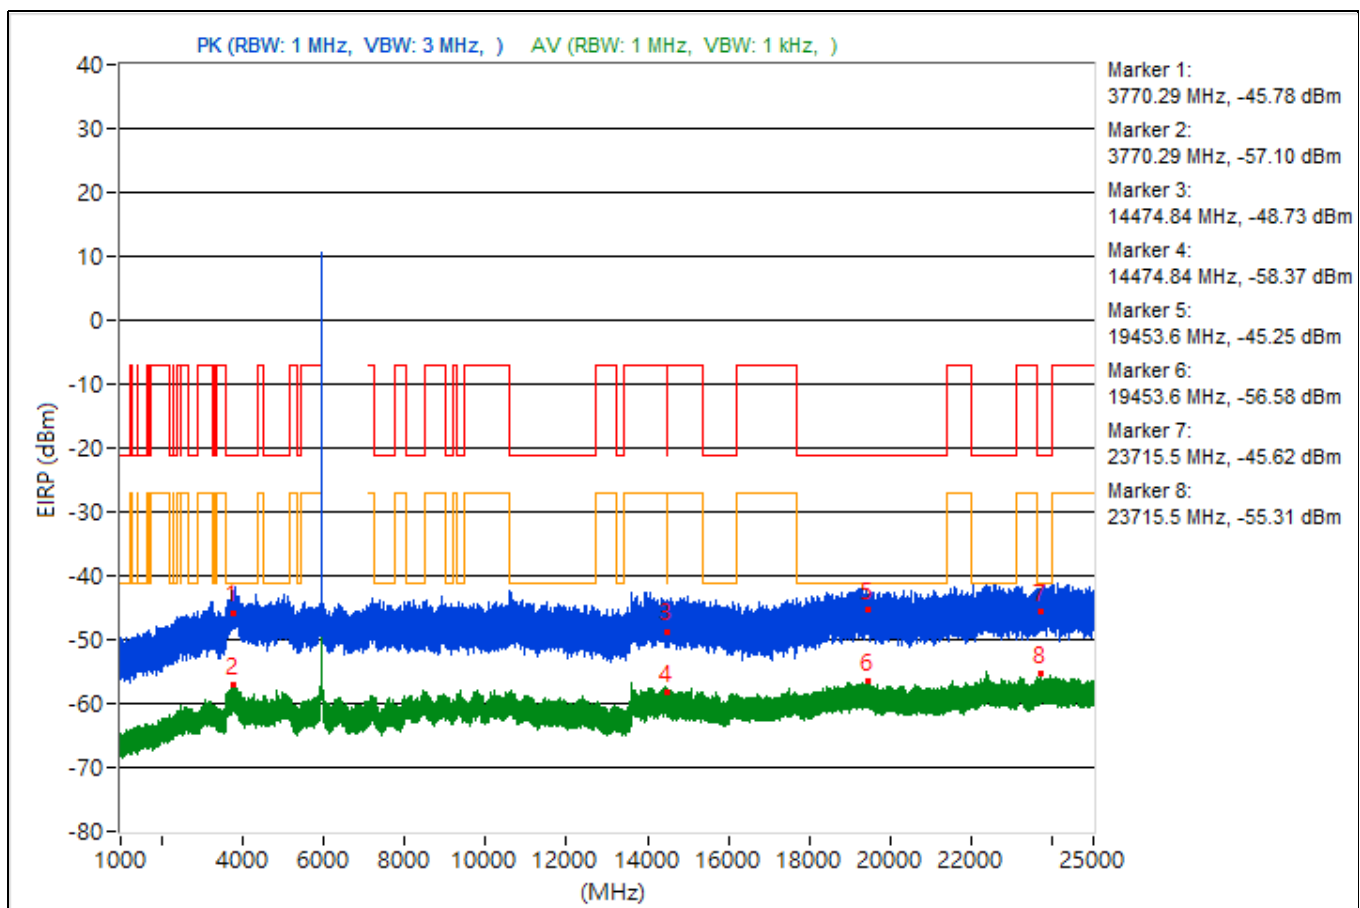


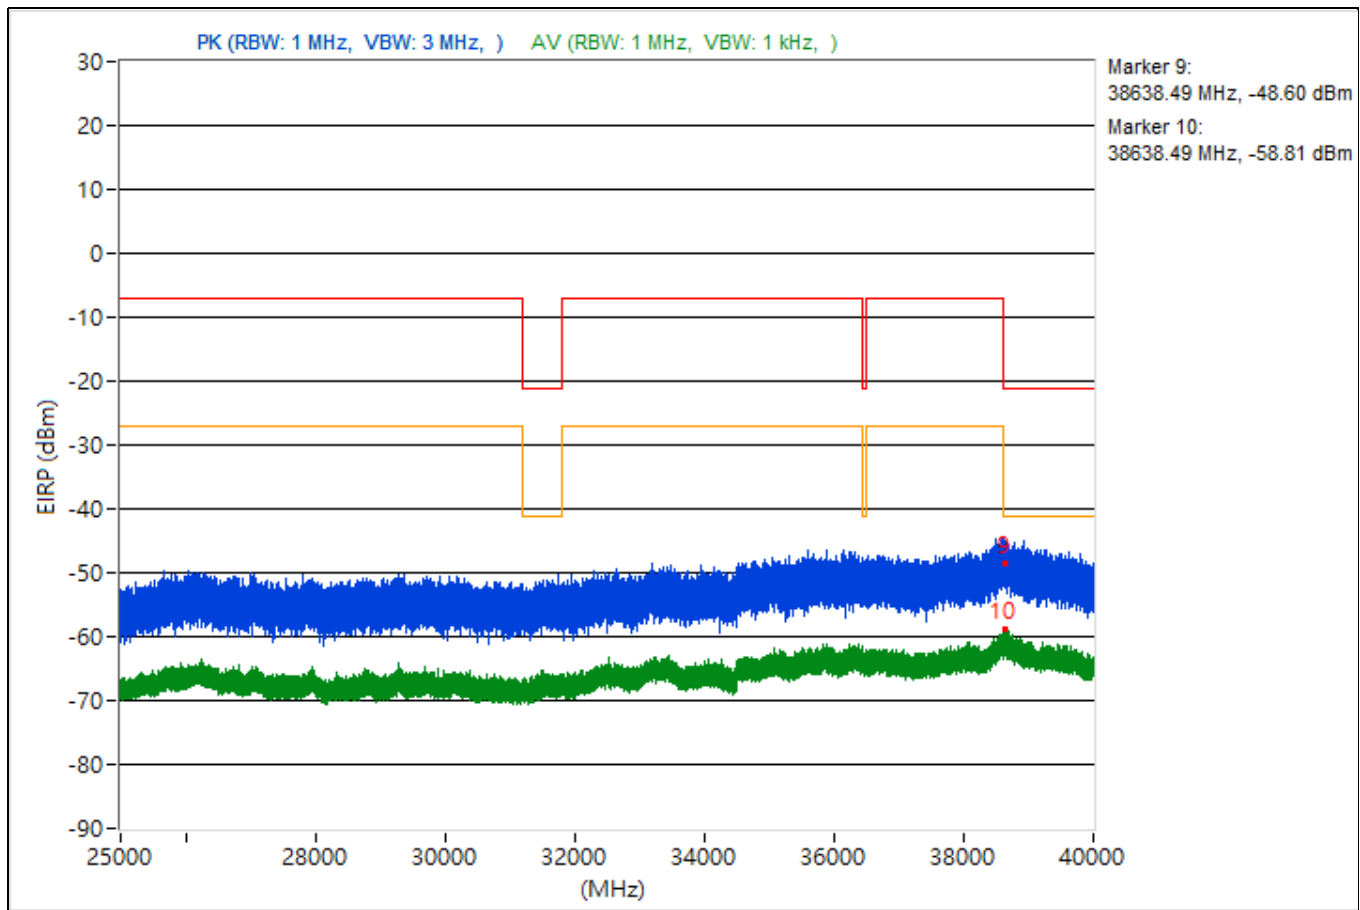


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.03	49.55 PK	74	-24.45	-53.76	-53.53	4.92	-45.71
2	3789.03	36.89 AV	54	-17.11	-65.07	-68.03	4.92	-58.37
3	14496.27	46.62 PK	74	-27.38	-57.34	-55.91	4.92	-48.64
4	14496.27	36.12 AV	54	-17.88	-65.97	-68.54	4.92	-59.14
5	19206.2	48.49 PK	74	-25.51	-54.97	-54.44	4.92	-46.77
6	19206.2	37.78 AV	54	-16.22	-64.85	-66.05	4.92	-57.48
7	22858.5	48.98 PK	74	-25.02	-53.59	-54.93	4.92	-46.28
8	22858.5	37.98 AV	54	-16.02	-67.42	-63.76	4.92	-57.28
9	38644.98	45.06 PK	74	-28.94	-58.75	-57.58	4.92	-50.2
10	38644.98	33.77 AV	54	-20.23	-71.5	-68.03	4.92	-61.49

Note: Margin value = Emission Level - Limit value

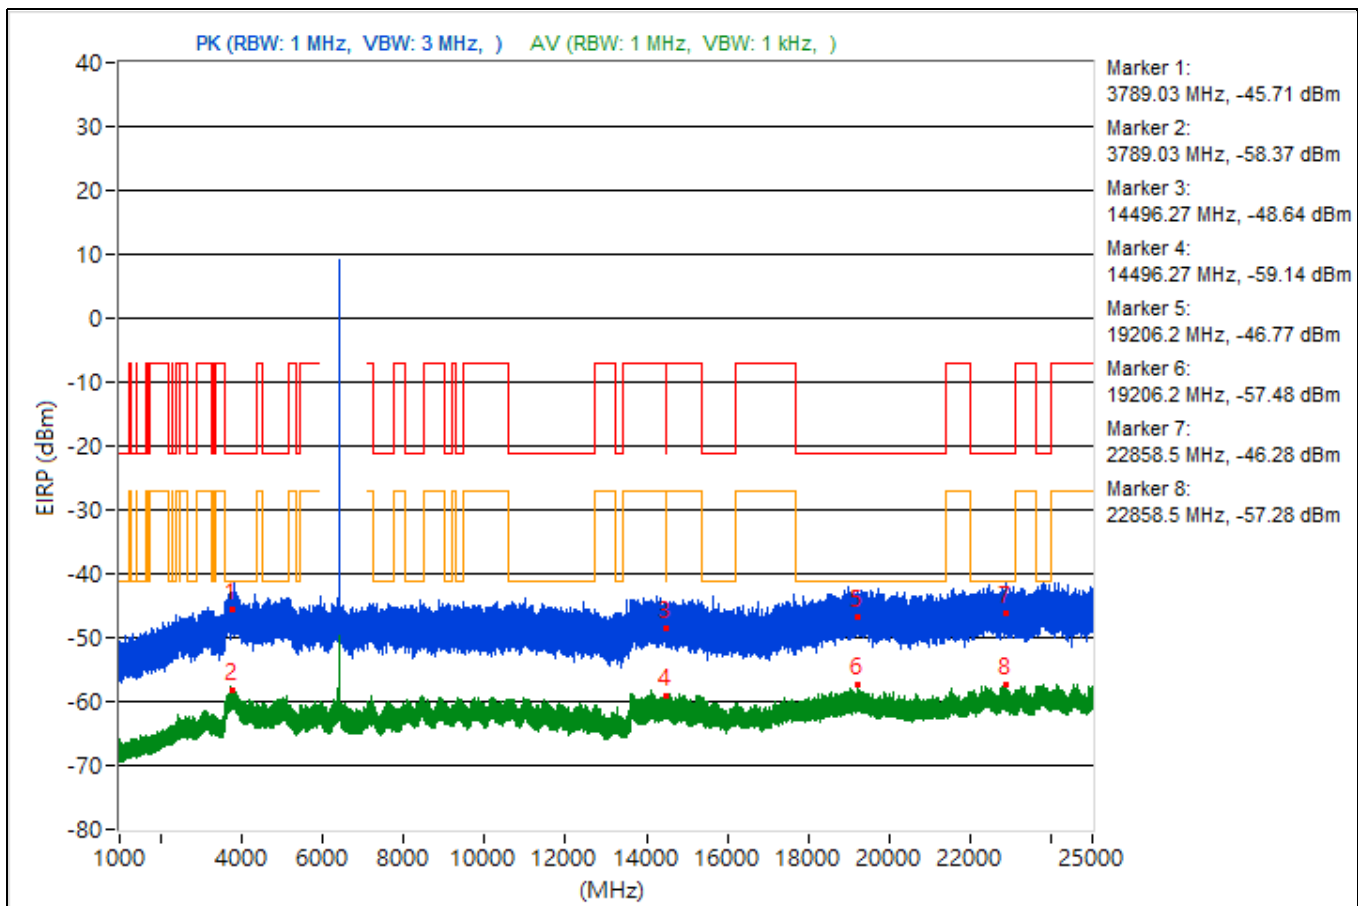


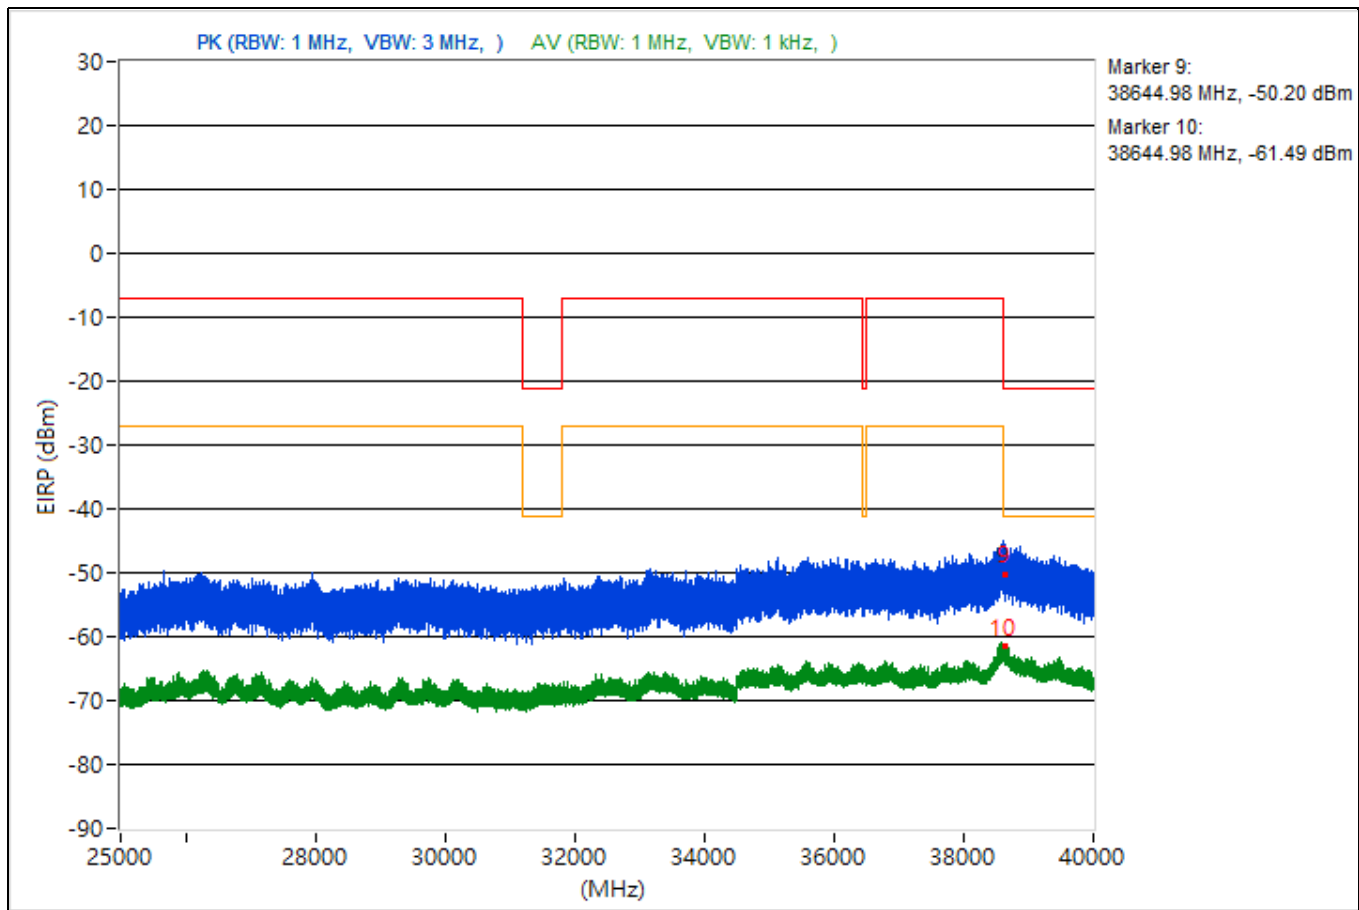


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3752.17	50 PK	74	-24	-52.46	-54.06	4.92	-45.26
2	3752.17	38.2 AV	54	-15.8	-64.22	-65.93	4.92	-57.06
3	14486.49	47.99 PK	74	-26.01	-54.34	-56.28	4.92	-47.27
4	14486.49	38.03 AV	54	-15.97	-64.54	-65.88	4.92	-57.23
5	19366.1	49.89 PK	74	-24.11	-56.4	-51.51	4.92	-45.37
6	19366.1	38.77 AV	54	-15.23	-66.76	-62.91	4.92	-56.49
7	22494.8	49.34 PK	74	-24.66	-53.62	-54.09	4.92	-45.92
8	22494.8	39.01 AV	54	-14.99	-62.88	-66.03	4.92	-56.25
9	38622.13	47.68 PK	74	-26.32	-54.52	-56.79	4.92	-47.58
10	38622.13	36.41 AV	54	-17.59	-67.23	-66.37	4.92	-58.85

Note: Margin value = Emission Level - Limit value

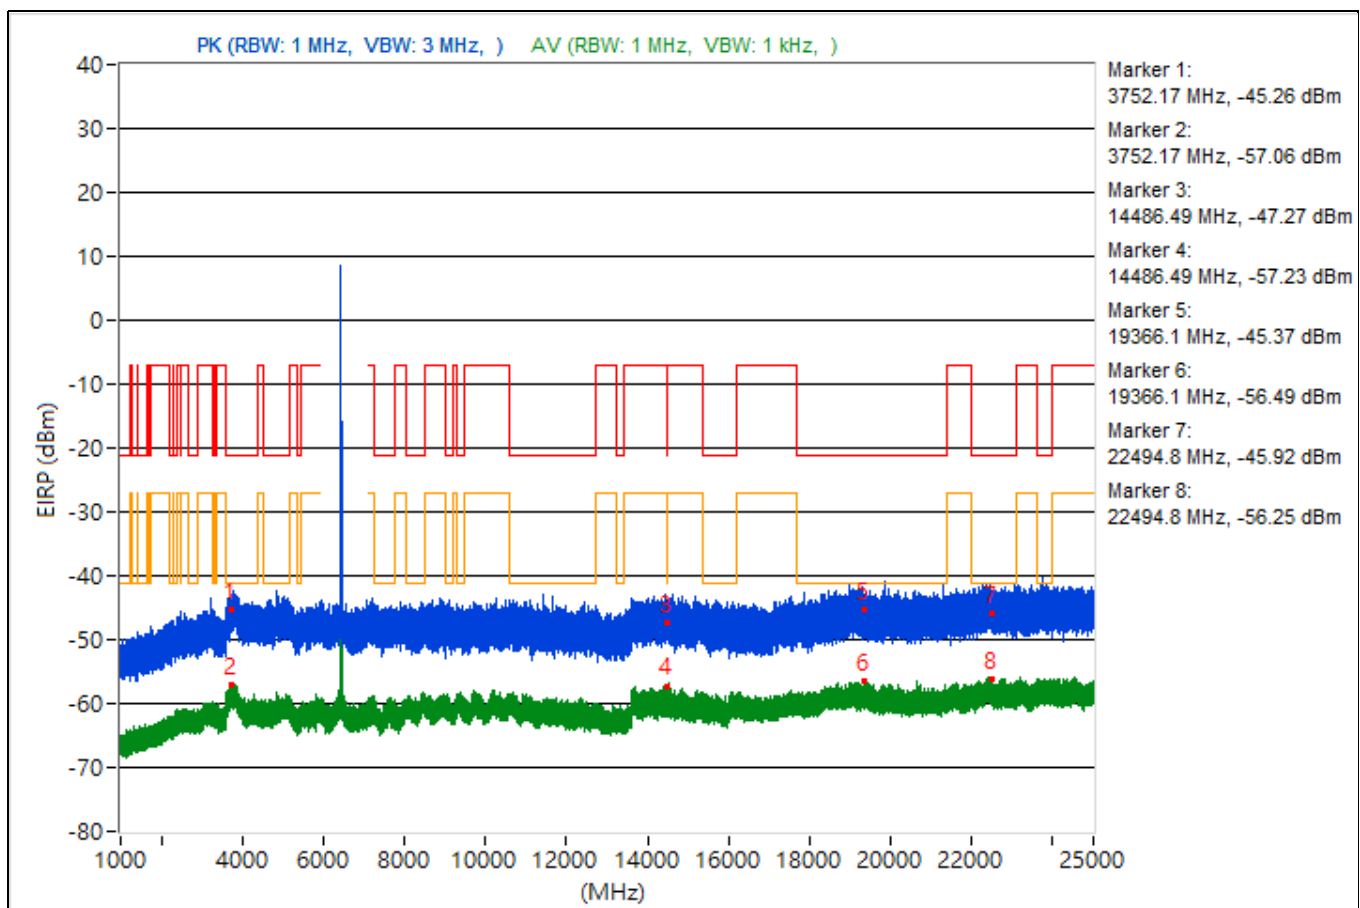


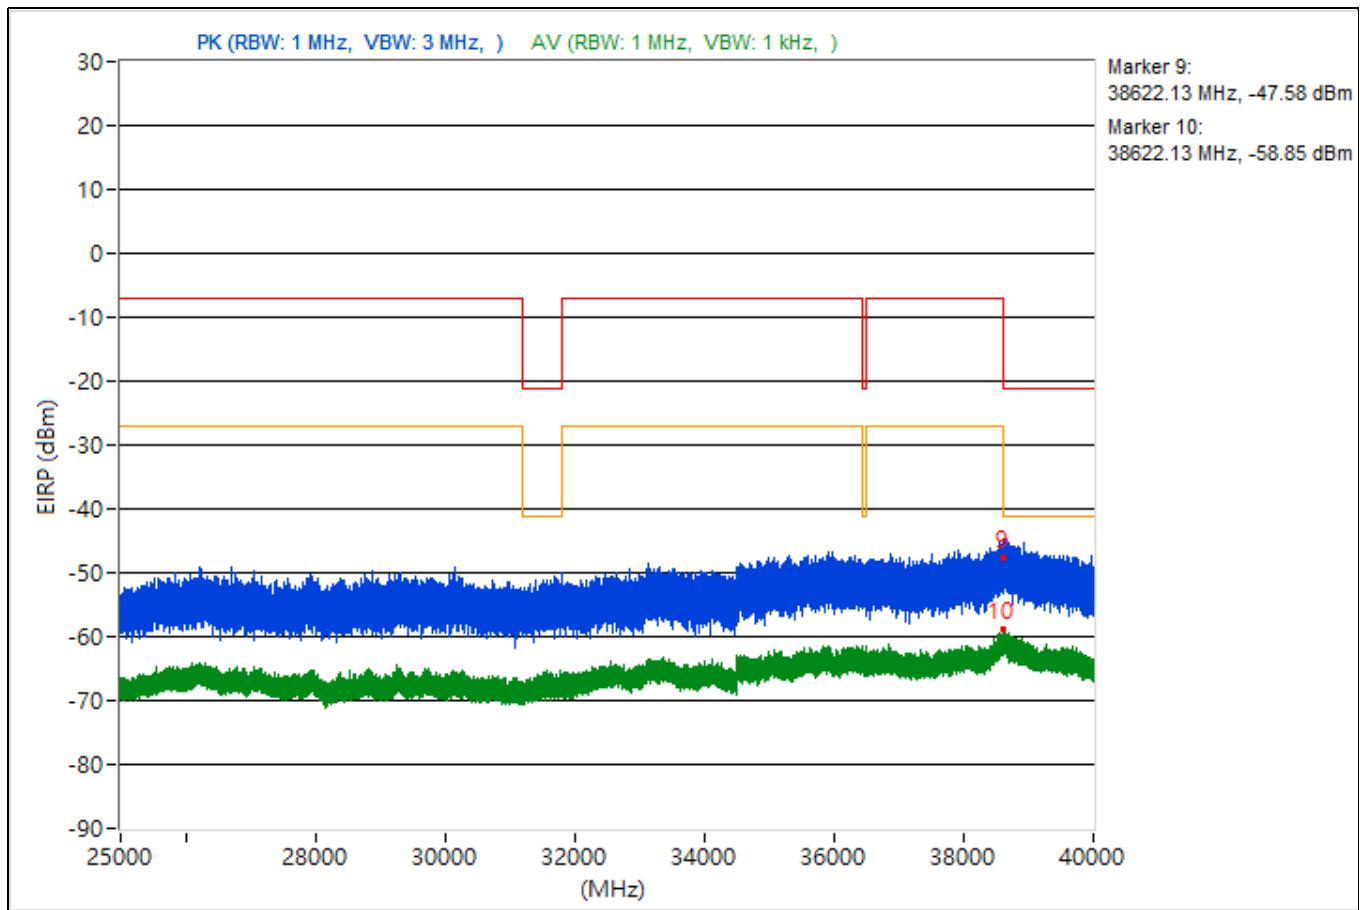


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.03	49.87 PK	74	-24.13	-53.14	-53.5	4.92	-45.39
2	3768.03	37.59 AV	54	-16.41	-64	-68.17	4.92	-57.67
3	14474.84	48.31 PK	74	-25.69	-53.75	-56.42	4.92	-46.95
4	14474.84	37.3 AV	54	-16.7	-67.54	-64.69	4.92	-57.96
5	19167.2	49.31 PK	74	-24.69	-54.81	-53.11	4.92	-45.95
6	19167.2	38.84 AV	54	-15.16	-65.61	-63.37	4.92	-56.42
7	23750.3	50.43 PK	74	-23.57	-53.45	-52.16	4.92	-44.83
8	23750.3	39.62 AV	54	-14.38	-64.57	-62.75	4.92	-55.64
9	38660.71	42.85 PK	74	-31.15	-59.74	-61.03	4.92	-52.41
10	38660.71	35.89 AV	54	-18.11	-68.88	-66.14	4.92	-59.37

Note: Margin value = Emission Level - Limit value

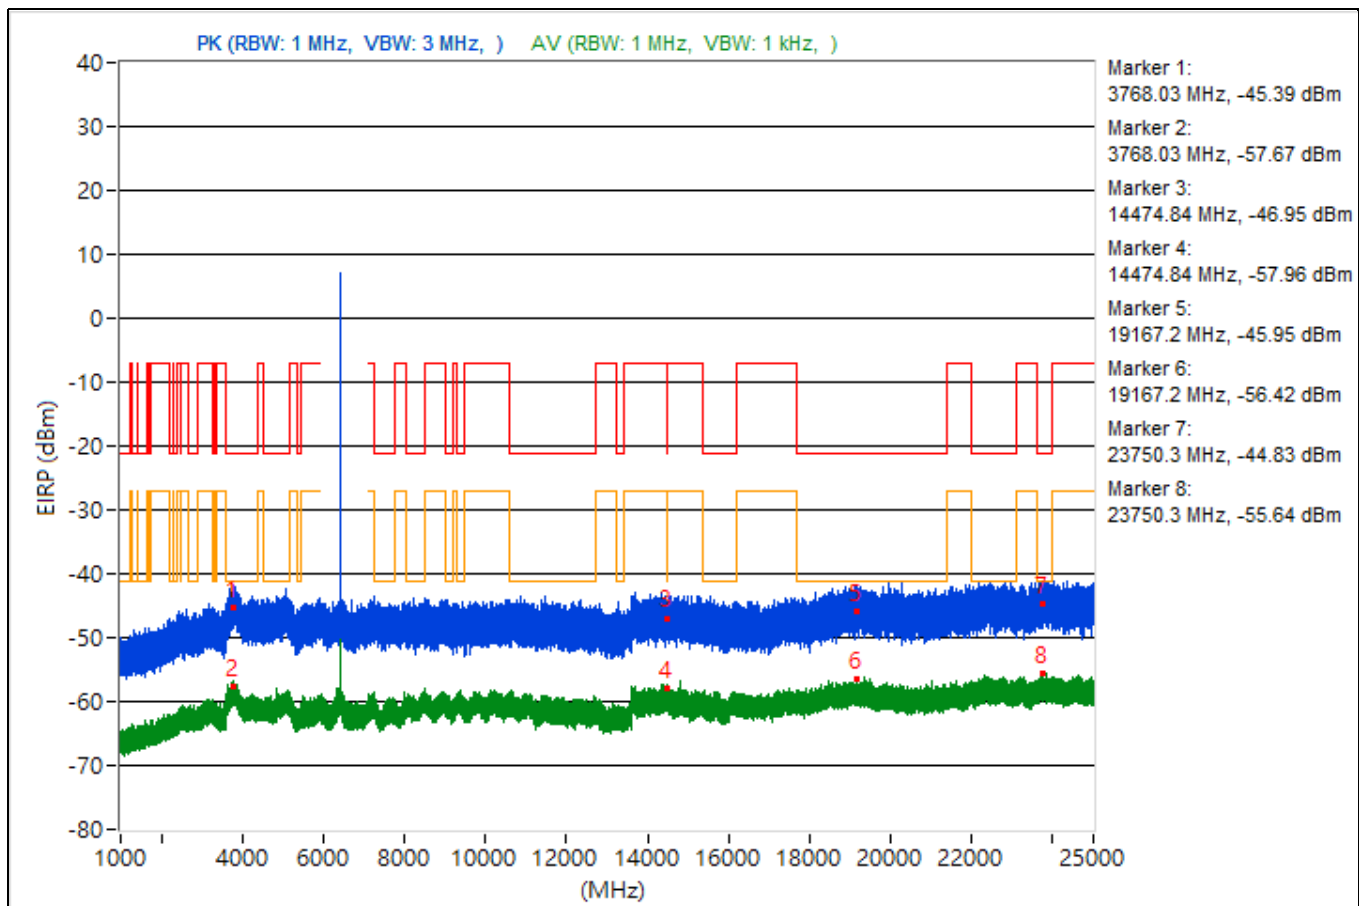


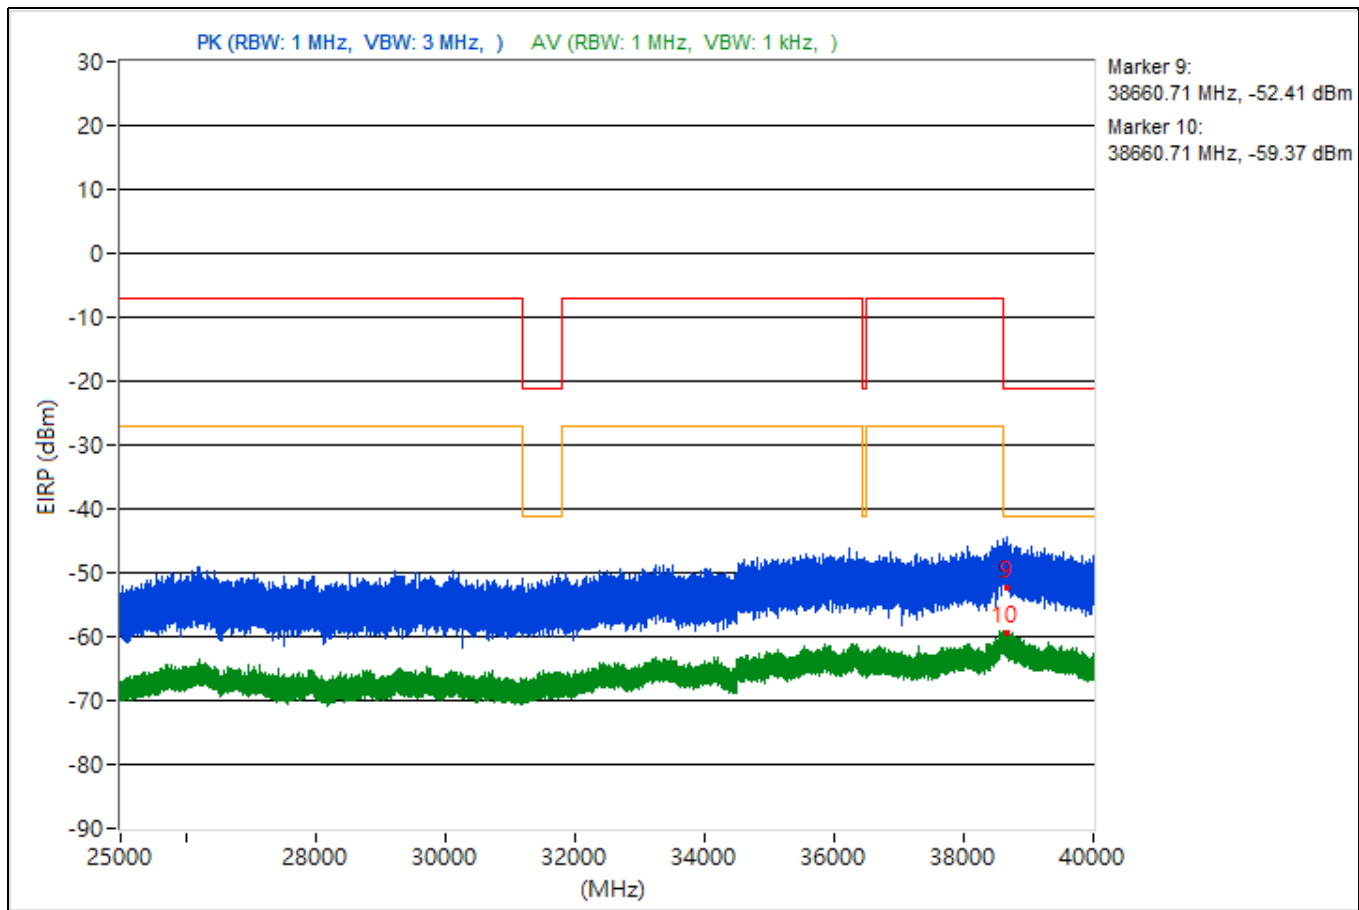


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.08	49.74 PK	74	-24.26	-52.42	-54.79	4.92	-45.52
2	3821.08	37.92 AV	54	-16.08	-66.48	-64.33	4.92	-57.34
3	14477.33	47.82 PK	74	-26.18	-54.86	-55.93	4.92	-47.44
4	14477.33	36.63 AV	54	-17.37	-68.43	-65.26	4.92	-58.63
5	19312.8	49.04 PK	74	-24.96	-53.37	-55.09	4.92	-46.22
6	19312.8	38.17 AV	54	-15.83	-67.89	-63.31	4.92	-57.09
7	23855.7	50.16 PK	74	-23.84	-53.24	-52.83	4.92	-45.1
8	23855.7	39.66 AV	54	-14.34	-62.61	-64.69	4.92	-55.6
9	38663.47	45.72 PK	74	-28.28	-58.58	-56.59	4.92	-49.54
10	38663.47	36.45 AV	54	-17.55	-65.39	-68.73	4.92	-58.81

Note: Margin value = Emission Level - Limit value

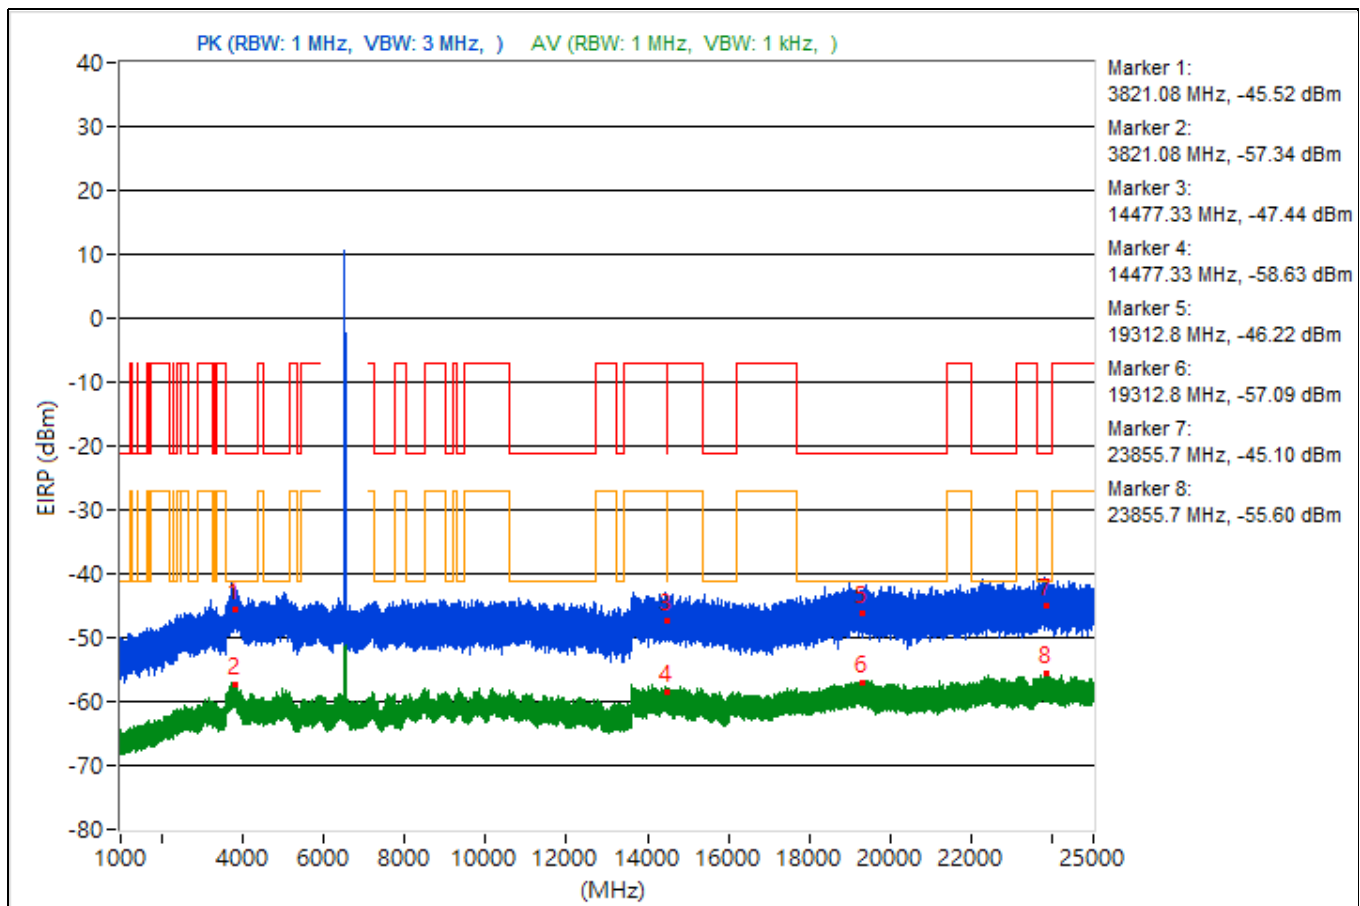


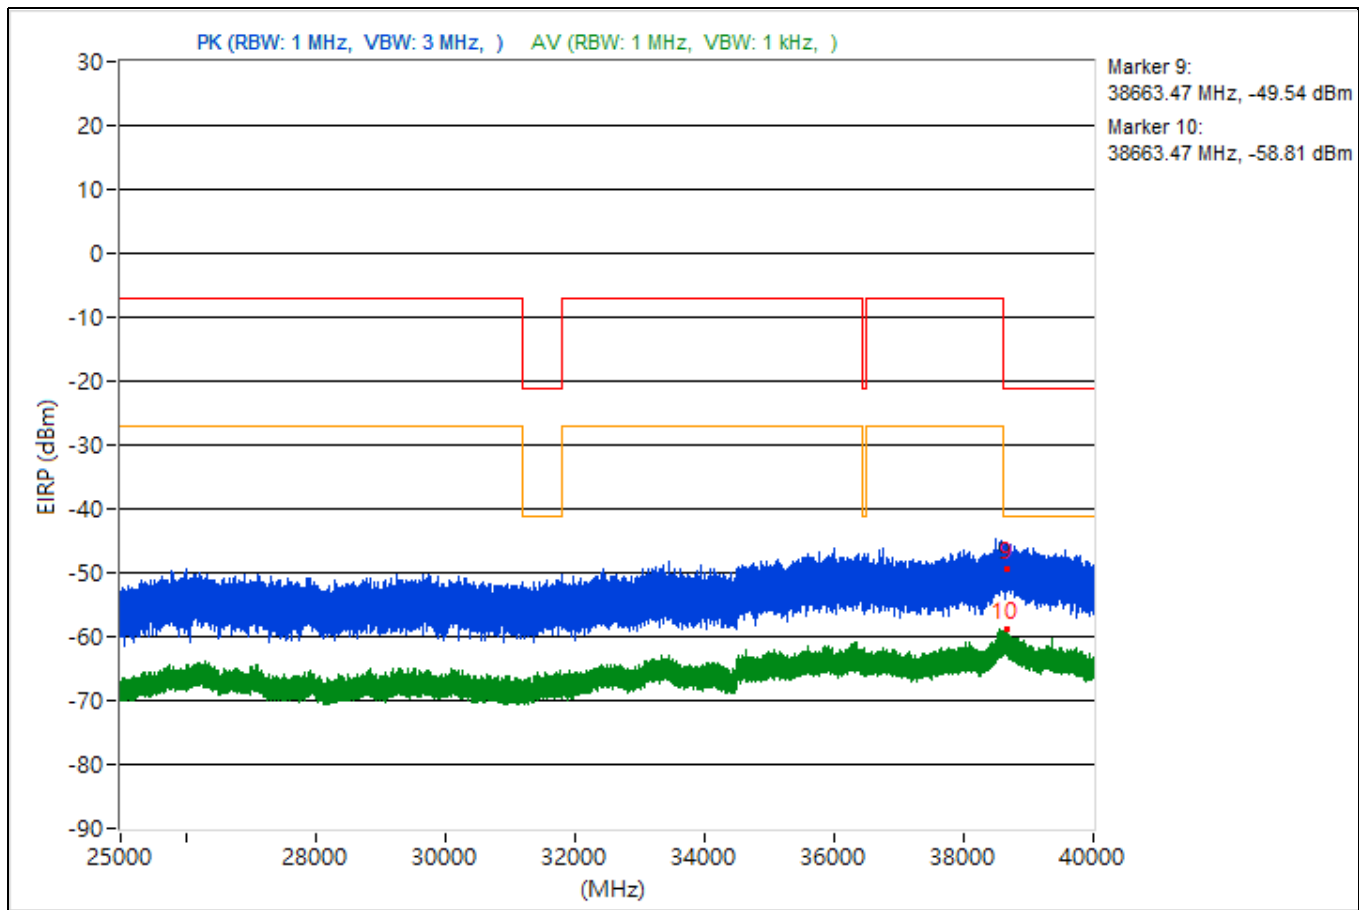


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3873.66	50.17 PK	74	-23.83	-52.03	-54.31	4.92	-45.09
2	3873.66	38.23 AV	54	-15.77	-65.73	-64.3	4.92	-57.03
3	9392.27	47.73 PK	74	-26.27	-56.54	-54.59	4.92	-47.53
4	9392.27	37.07 AV	54	-16.93	-64.81	-67.99	4.92	-58.19
5	19358.8	51.88 PK	74	-22.12	-50.14	-52.92	4.92	-43.38
6	19358.8	38.13 AV	54	-15.87	-63.26	-68.2	4.92	-57.13
7	22376.2	51.82 PK	74	-22.18	-49.52	-54.68	4.92	-43.44
8	22376.2	39.14 AV	54	-14.86	-62.89	-65.63	4.92	-56.12
9	38664.89	47.98 PK	74	-26.02	-58.64	-53.32	4.92	-47.28
10	38664.89	35.78 AV	54	-18.22	-65.81	-69.96	4.92	-59.48

Note: Margin value = Emission Level - Limit value

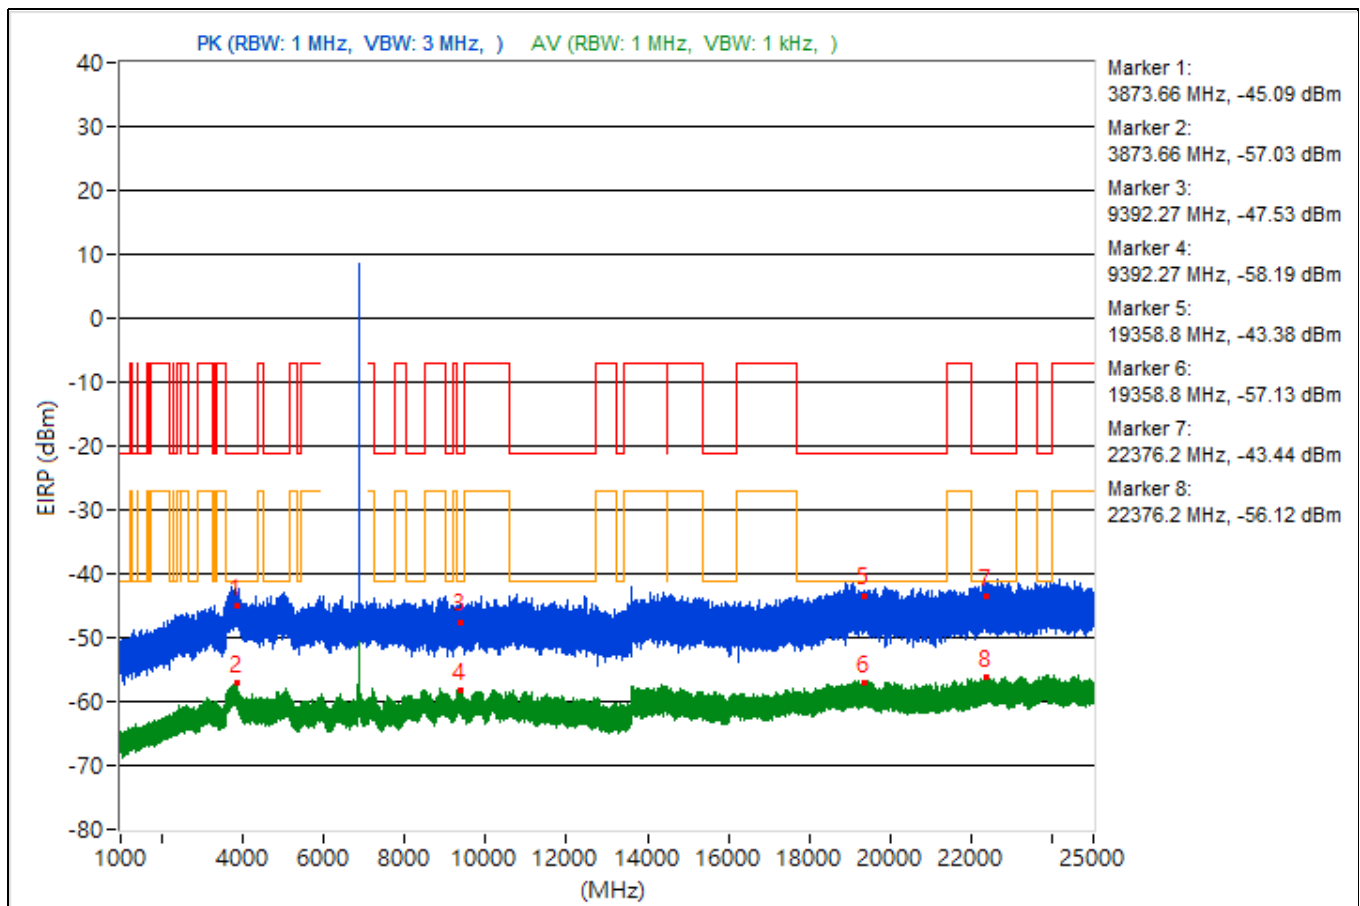


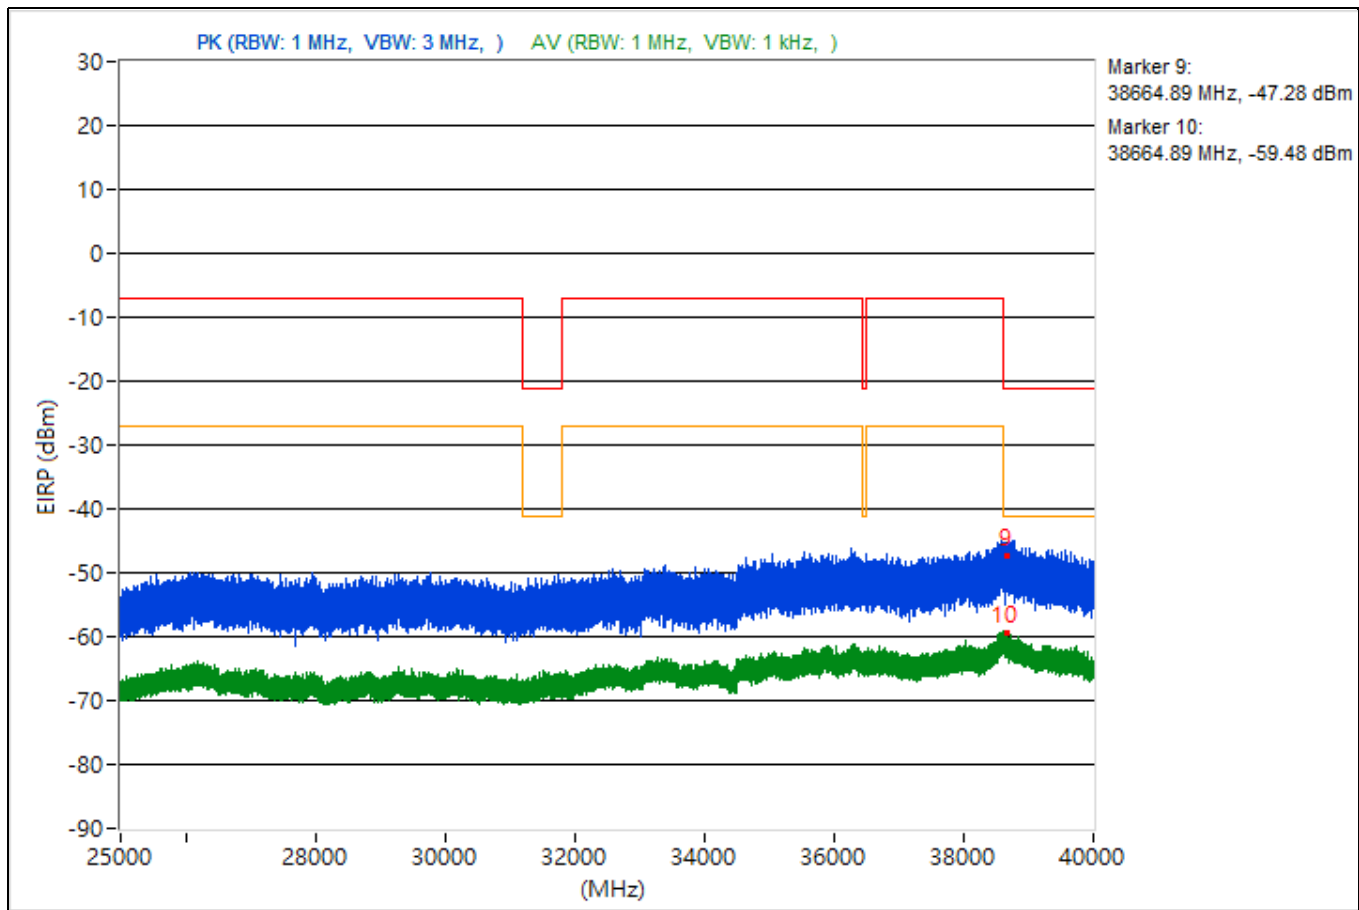


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.59	48.49 PK	74	-25.51	-54.22	-55.25	4.92	-46.77
2	3790.59	37.99 AV	54	-16.01	-64.23	-66.43	4.92	-57.27
3	14471.82	48.59 PK	74	-25.41	-54.76	-54.45	4.92	-46.67
4	14471.82	37.42 AV	54	-16.58	-65.09	-66.58	4.92	-57.84
5	19014	51.93 PK	74	-22.07	-50.6	-52.03	4.92	-43.33
6	19014	38.47 AV	54	-15.53	-63.56	-66.31	4.92	-56.79
7	23826.6	51.51 PK	74	-22.49	-51.34	-52.05	4.92	-43.75
8	23826.6	39.22 AV	54	-14.78	-66.27	-62.47	4.92	-56.04
9	38634.84	44.58 PK	74	-29.42	-58.8	-58.42	4.92	-50.68
10	38634.84	36.23 AV	54	-17.77	-68.62	-65.76	4.92	-59.03

Note: Margin value = Emission Level - Limit value

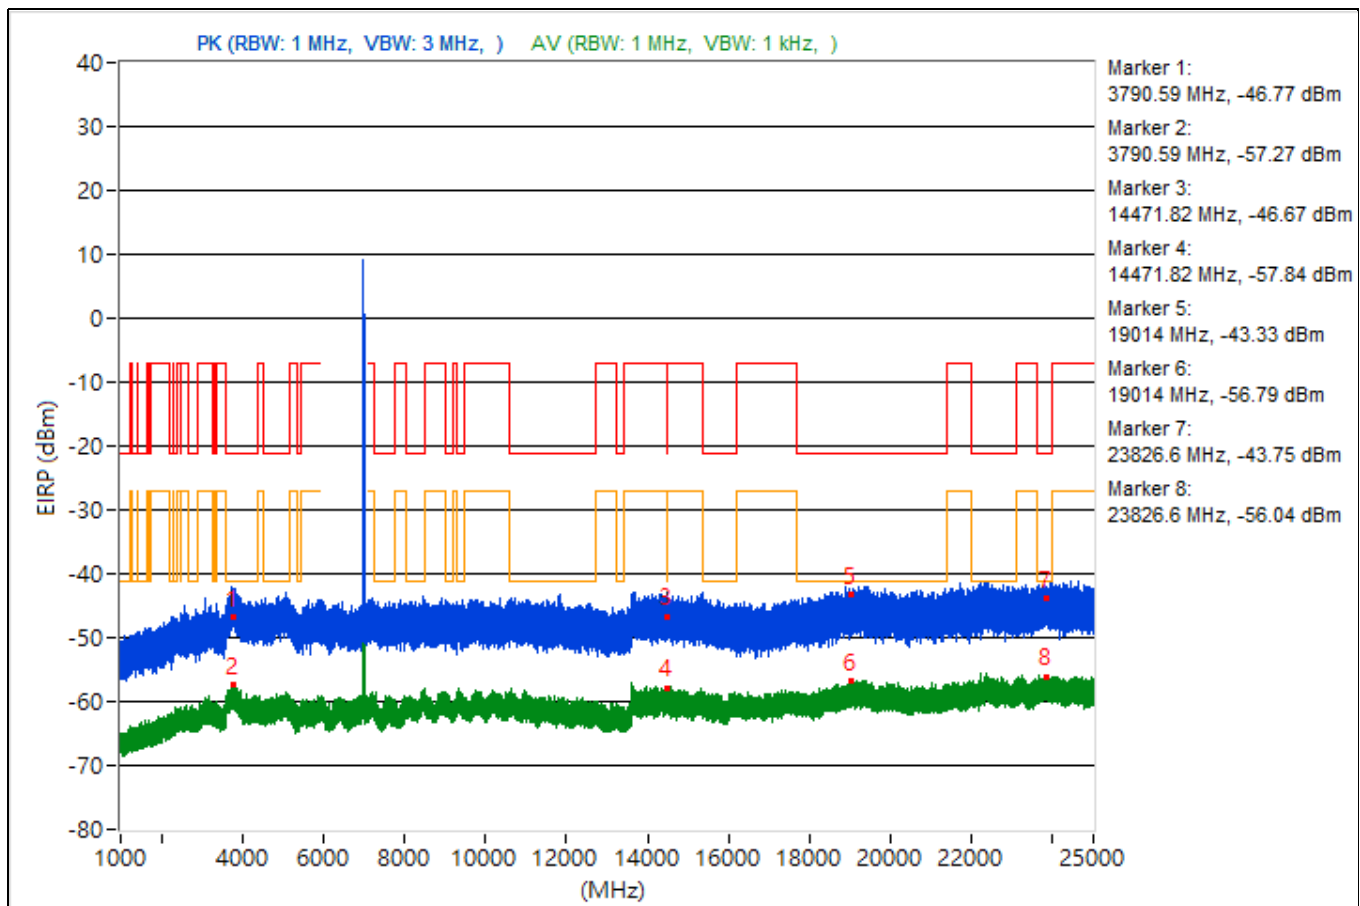


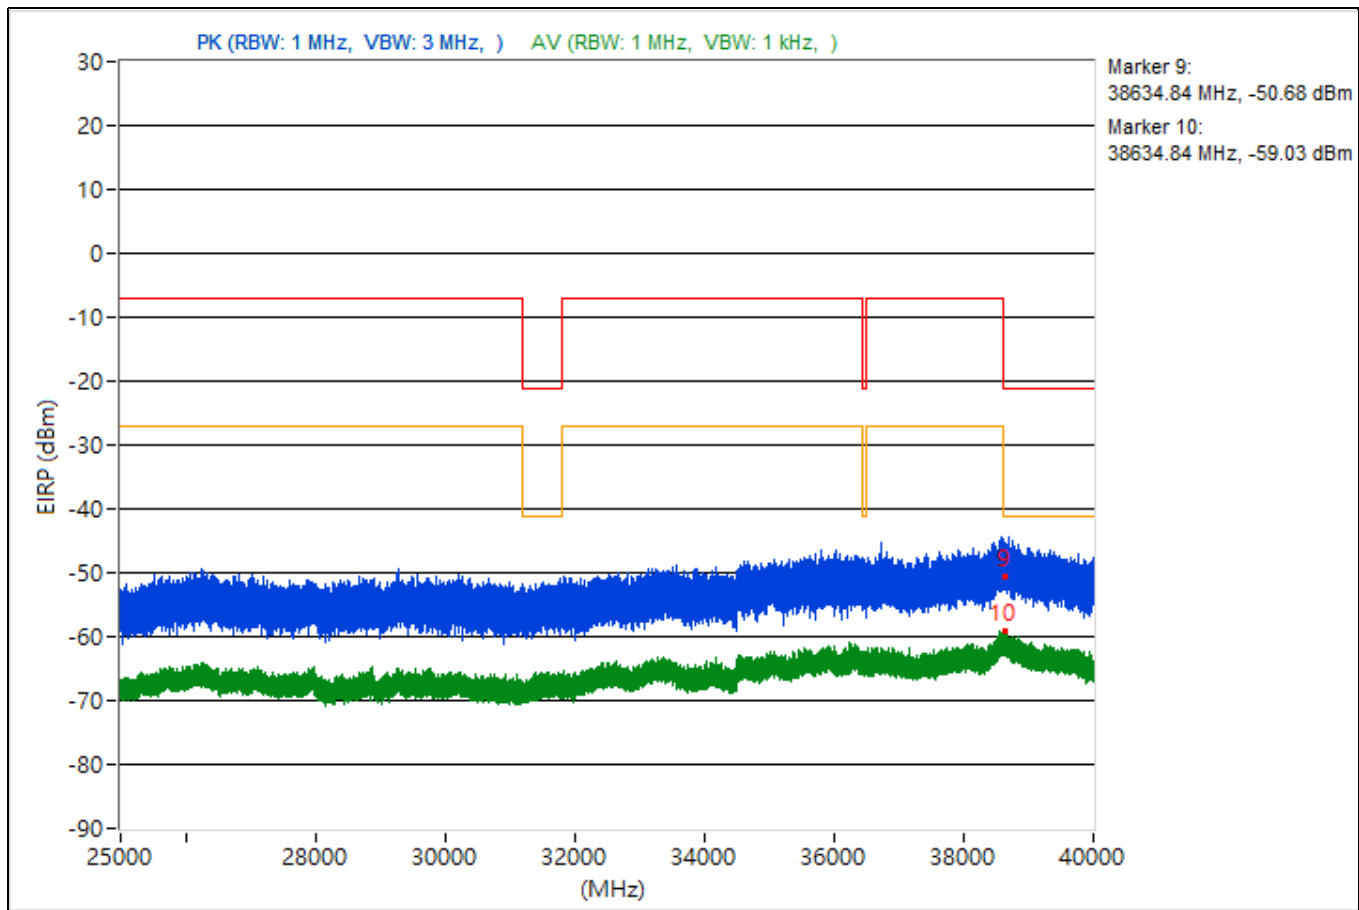


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.69	50.36 PK	74	-23.64	-51.68	-54.39	4.92	-44.9
2	3820.69	38.42 AV	54	-15.58	-63.97	-65.77	4.92	-56.84
3	14478.4	48.4 PK	74	-25.6	-54.75	-54.84	4.92	-46.86
4	14478.4	37.04 AV	54	-16.96	-67.76	-64.98	4.92	-58.22
5	19237.1	47.9 PK	74	-26.1	-54.67	-56.02	4.92	-47.36
6	19237.1	38.24 AV	54	-15.76	-63.55	-67.03	4.92	-57.02
7	22388.7	49.1 PK	74	-24.9	-54.13	-54.04	4.92	-46.16
8	22388.7	38.81 AV	54	-15.19	-66.15	-63.12	4.92	-56.45
9	38621.16	47.92 PK	74	-26.08	-54.82	-55.78	4.92	-47.34
10	38621.16	35.54 AV	54	-18.46	-70.05	-66.12	4.92	-59.72

Note: Margin value = Emission Level - Limit value

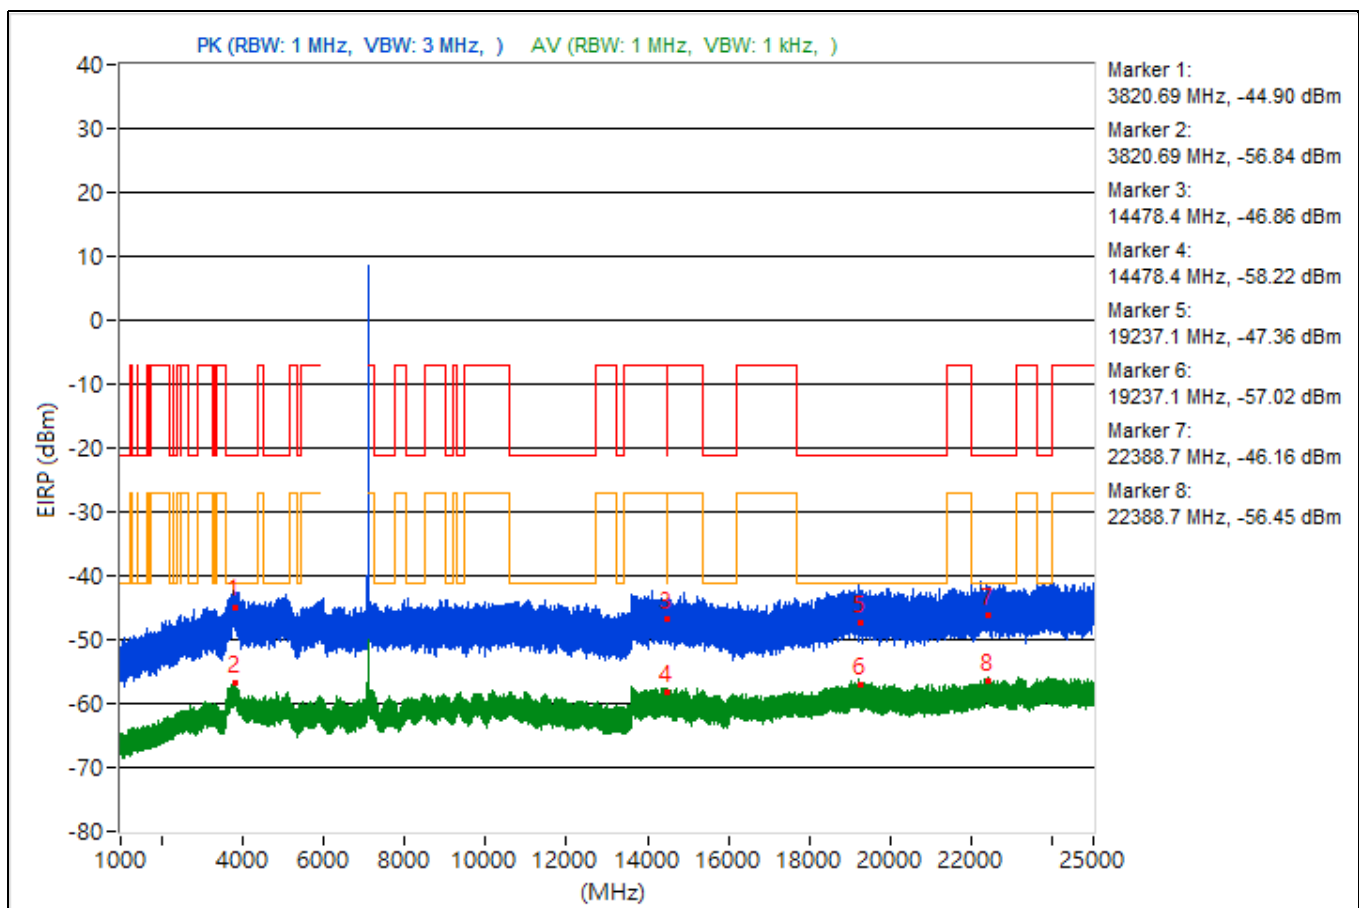


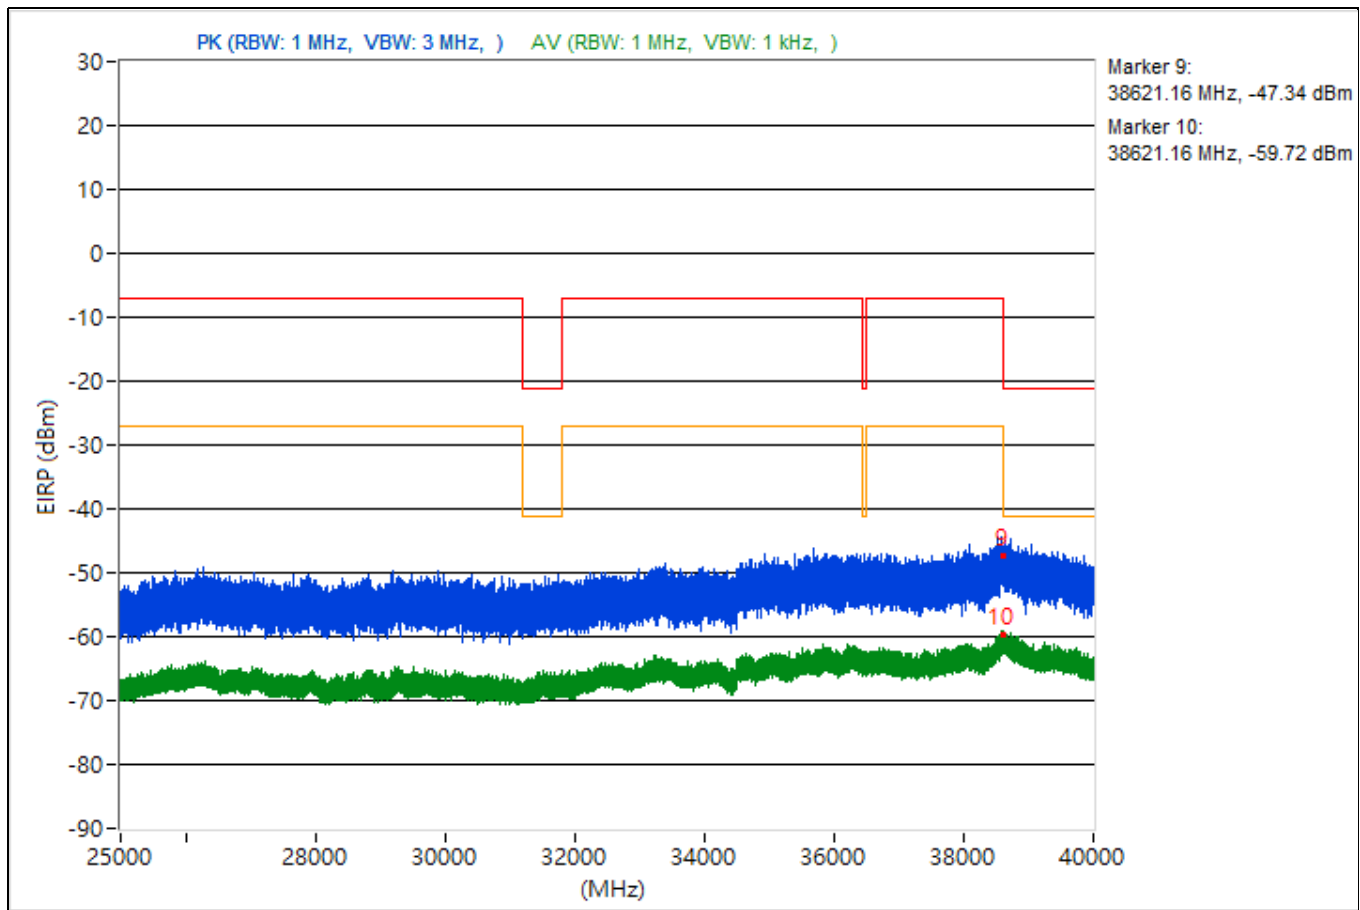


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3833.91	51.63 PK	74	-22.37	-53.44	-50.25	4.92	-43.63
2	3833.91	37.96 AV	54	-16.04	-66.97	-63.98	4.92	-57.3
3	14494.31	46.3 PK	74	-27.7	-56.73	-57.05	4.92	-48.96
4	14494.31	37.82 AV	54	-16.18	-66.86	-64.26	4.92	-57.44
5	19337.3	49.69 PK	74	-24.31	-52.36	-55.05	4.92	-45.57
6	19337.3	38.88 AV	54	-15.12	-63.25	-65.73	4.92	-56.38
7	23672.8	50.82 PK	74	-23.18	-53.46	-51.49	4.92	-44.44
8	23672.8	39.04 AV	54	-14.96	-67.02	-62.43	4.92	-56.22
9	38646.84	47.15 PK	74	-26.85	-58.8	-54.36	4.92	-48.11
10	38646.84	36.27 AV	54	-17.73	-66.15	-67.86	4.92	-58.99

Note: Margin value = Emission Level - Limit value

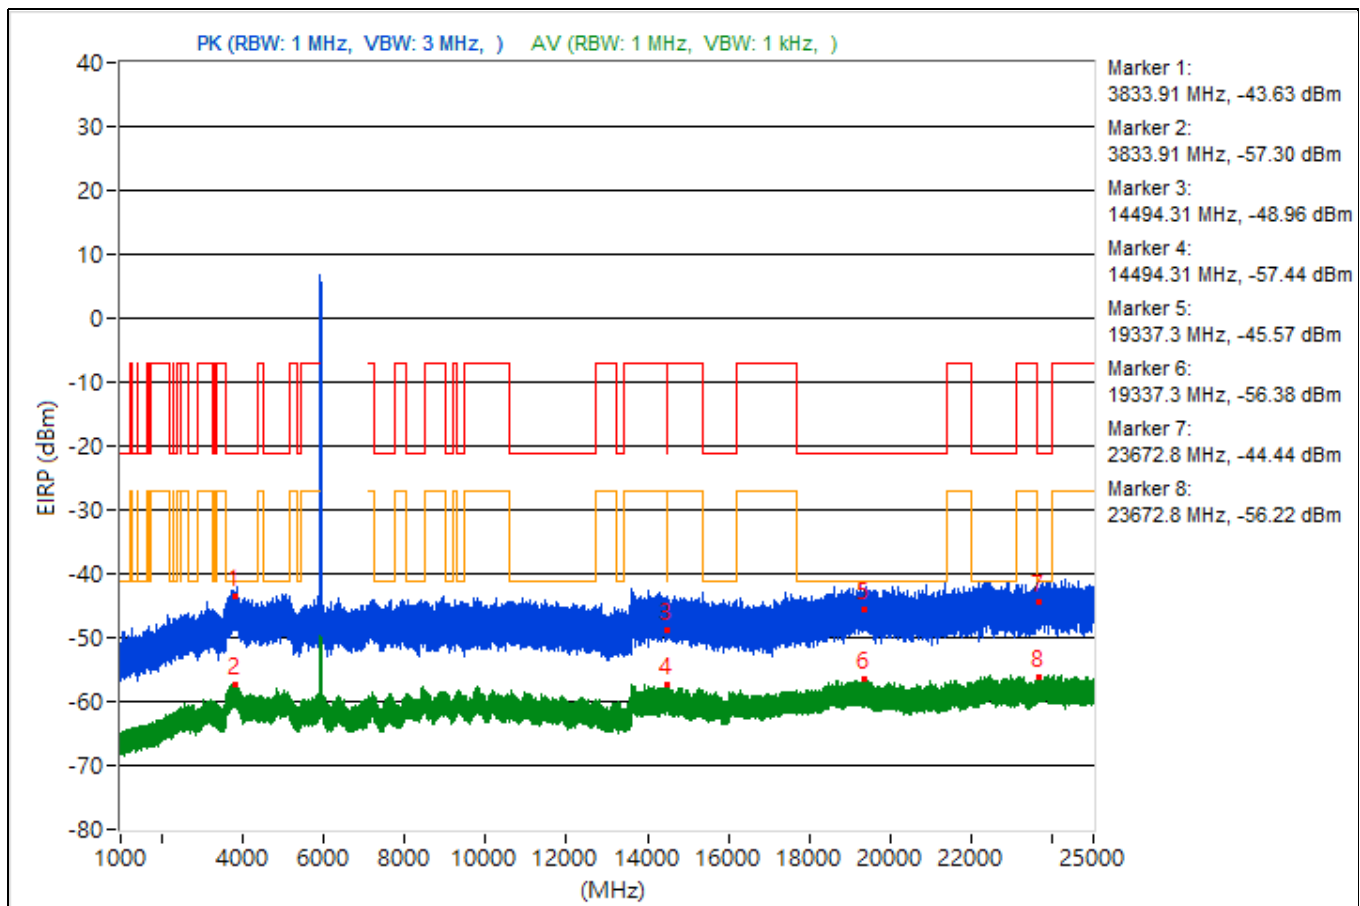


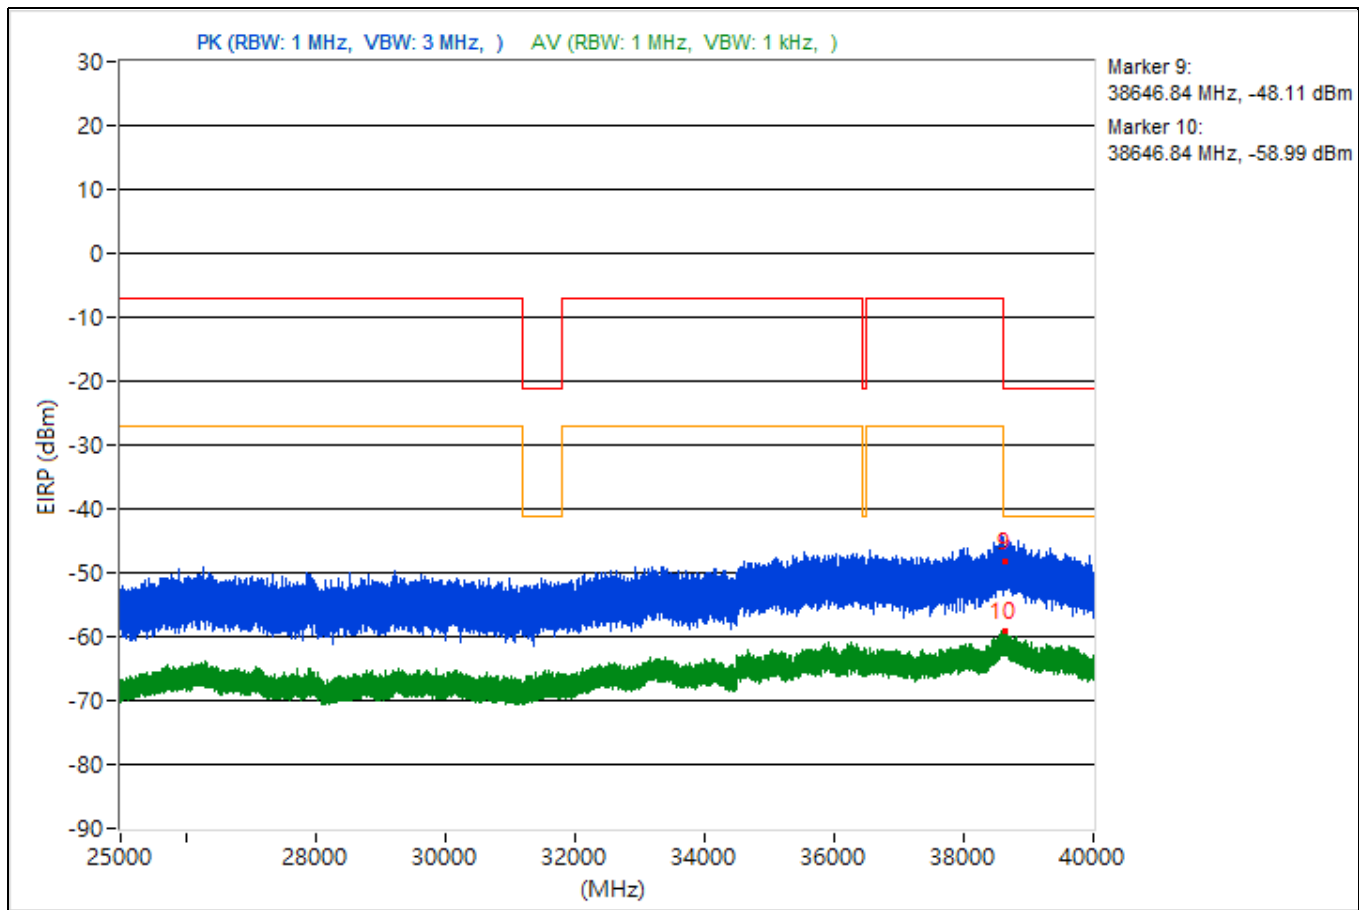


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.13	48.33 PK	74	-25.67	-54.72	-55	4.92	-46.93
2	3819.13	37.4 AV	54	-16.6	-67.59	-64.51	4.92	-57.86
3	14481.07	49.85 PK	74	-24.15	-51.79	-55.79	4.92	-45.41
4	14481.07	37.5 AV	54	-16.5	-65.28	-66.13	4.92	-57.76
5	19281.5	48.57 PK	74	-25.43	-55.32	-54.02	4.92	-46.69
6	19281.5	39.03 AV	54	-14.97	-64.86	-63.55	4.92	-56.23
7	23704.1	49.9 PK	74	-24.1	-53.22	-53.35	4.92	-45.36
8	23704.1	39.32 AV	54	-14.68	-62.59	-65.7	4.92	-55.94
9	38632.71	45.17 PK	74	-28.83	-57.73	-58.33	4.92	-50.09
10	38632.71	35.8 AV	54	-18.2	-68.89	-66.28	4.92	-59.46

Note: Margin value = Emission Level - Limit value

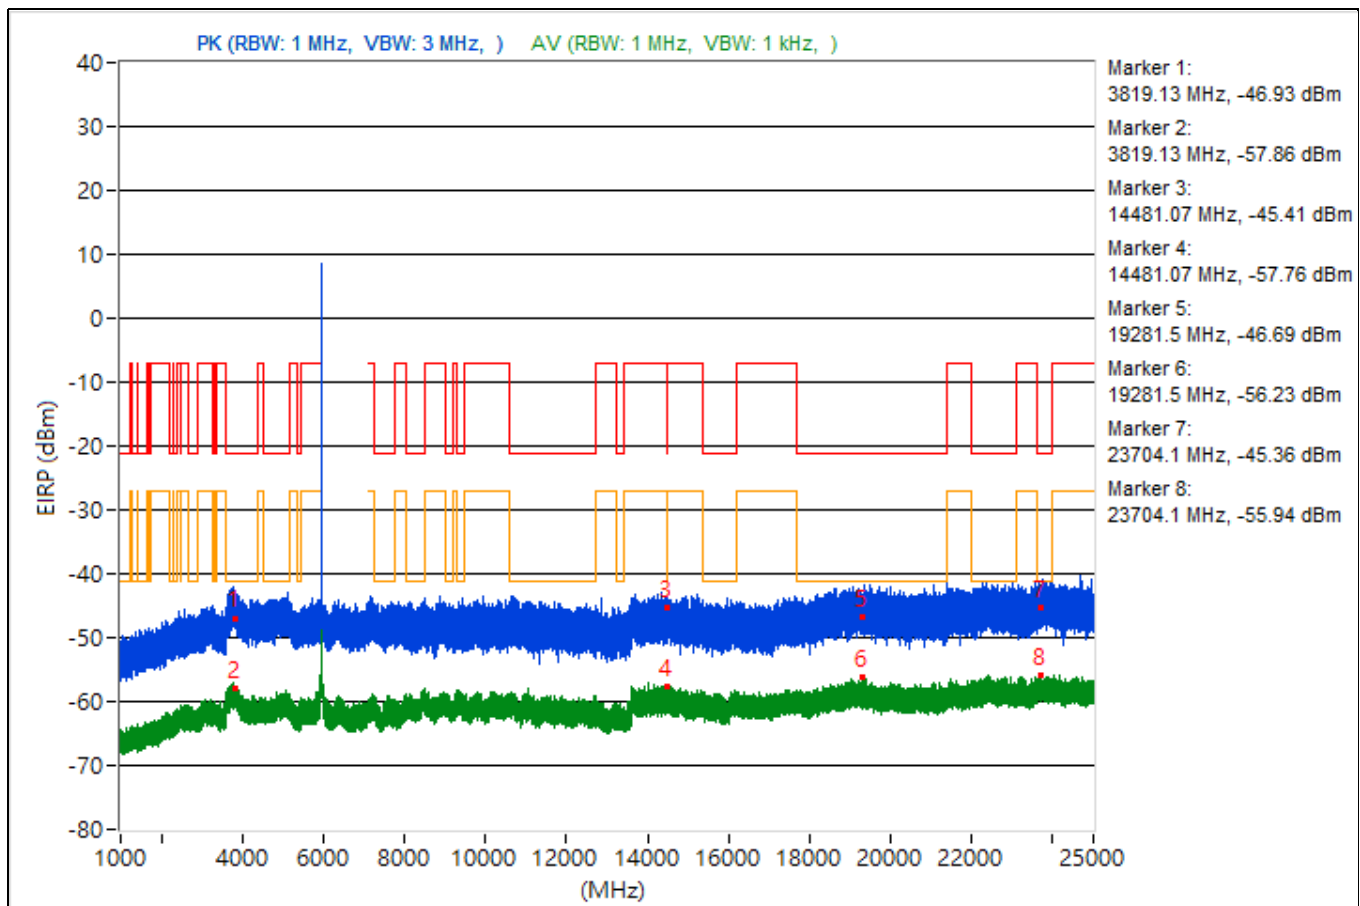


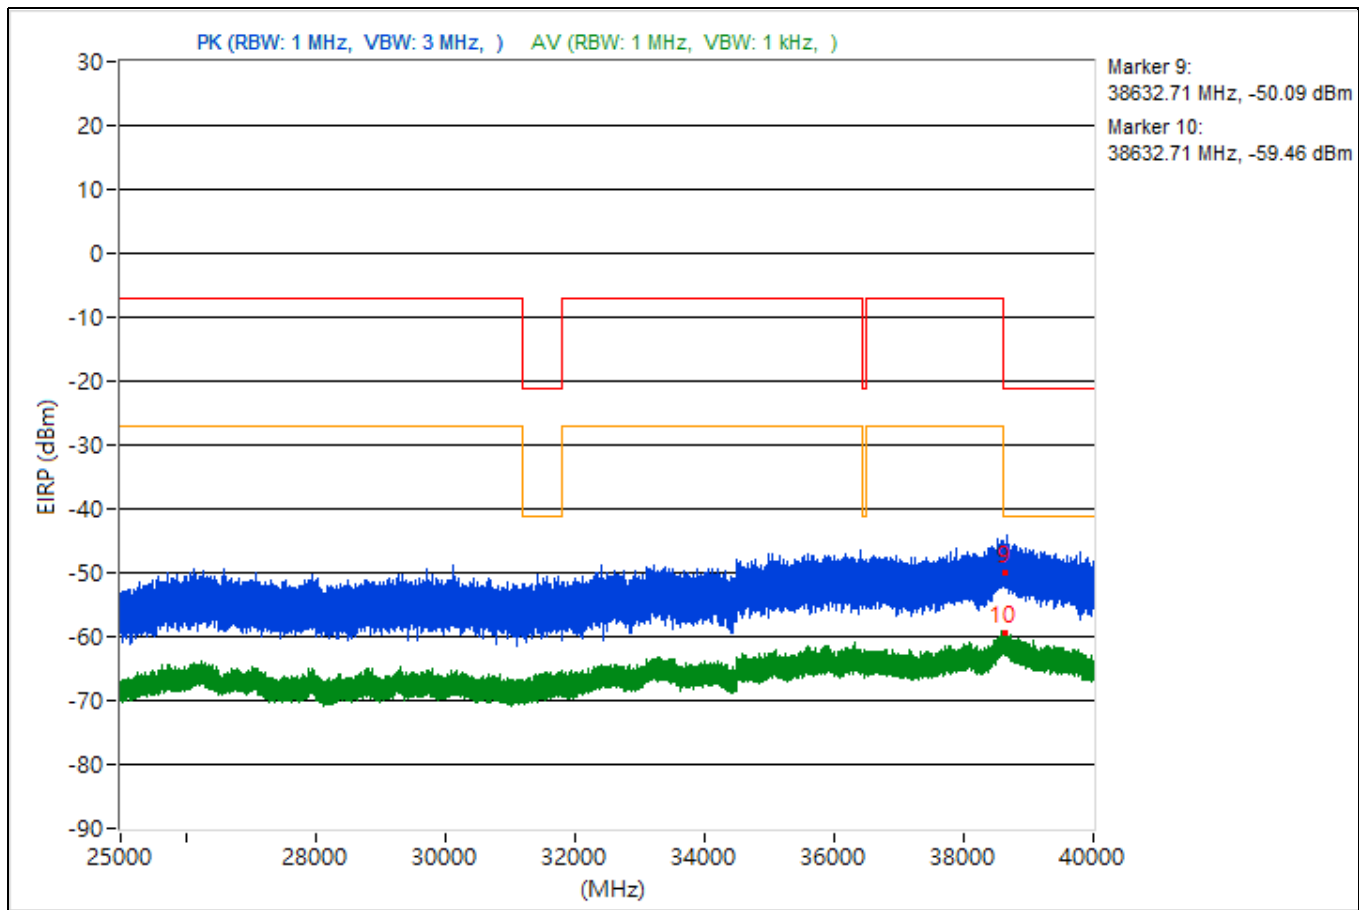


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3829.17	49.71 PK	74	-24.29	-53.46	-53.51	4.92	-45.55
2	3829.17	38.44 AV	54	-15.56	-63.72	-66.11	4.92	-56.82
3	15365.33	47.19 PK	74	-26.81	-57.4	-54.94	4.92	-48.07
4	15365.33	37.75 AV	54	-16.25	-67.31	-64.14	4.92	-57.51
5	19436.3	49.26 PK	74	-24.74	-54.44	-53.48	4.92	-46
6	19436.3	38.63 AV	54	-15.37	-66.65	-63.15	4.92	-56.63
7	23830.9	48.9 PK	74	-25.1	-55.69	-53.24	4.92	-46.36
8	23830.9	39.31 AV	54	-14.69	-62.45	-66.03	4.92	-55.95
9	38661.33	45.42 PK	74	-28.58	-62.58	-55.55	4.92	-49.84
10	38661.33	35.36 AV	54	-18.64	-70.45	-66.21	4.92	-59.9

Note: Margin value = Emission Level - Limit value

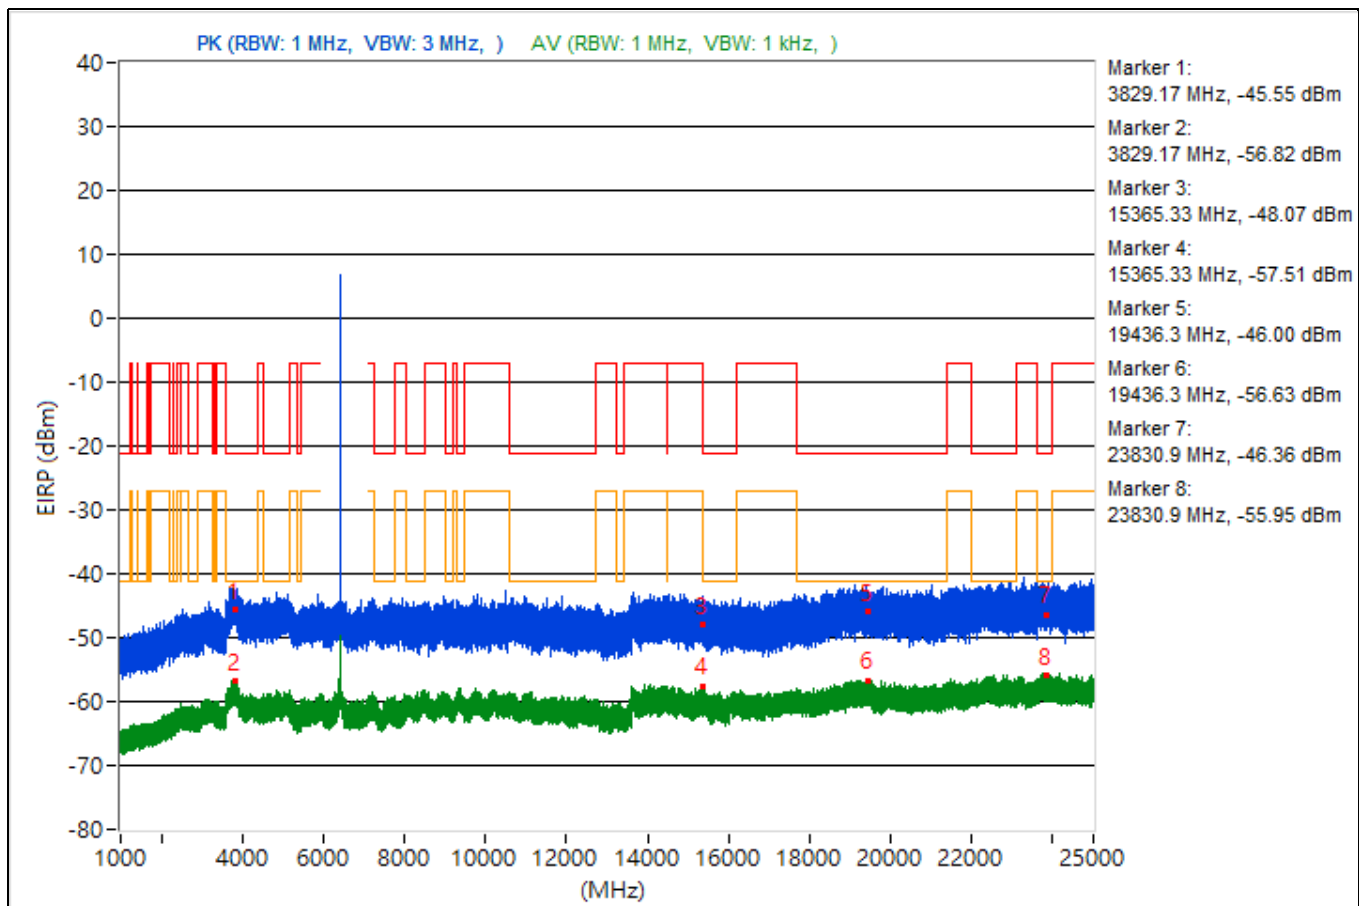


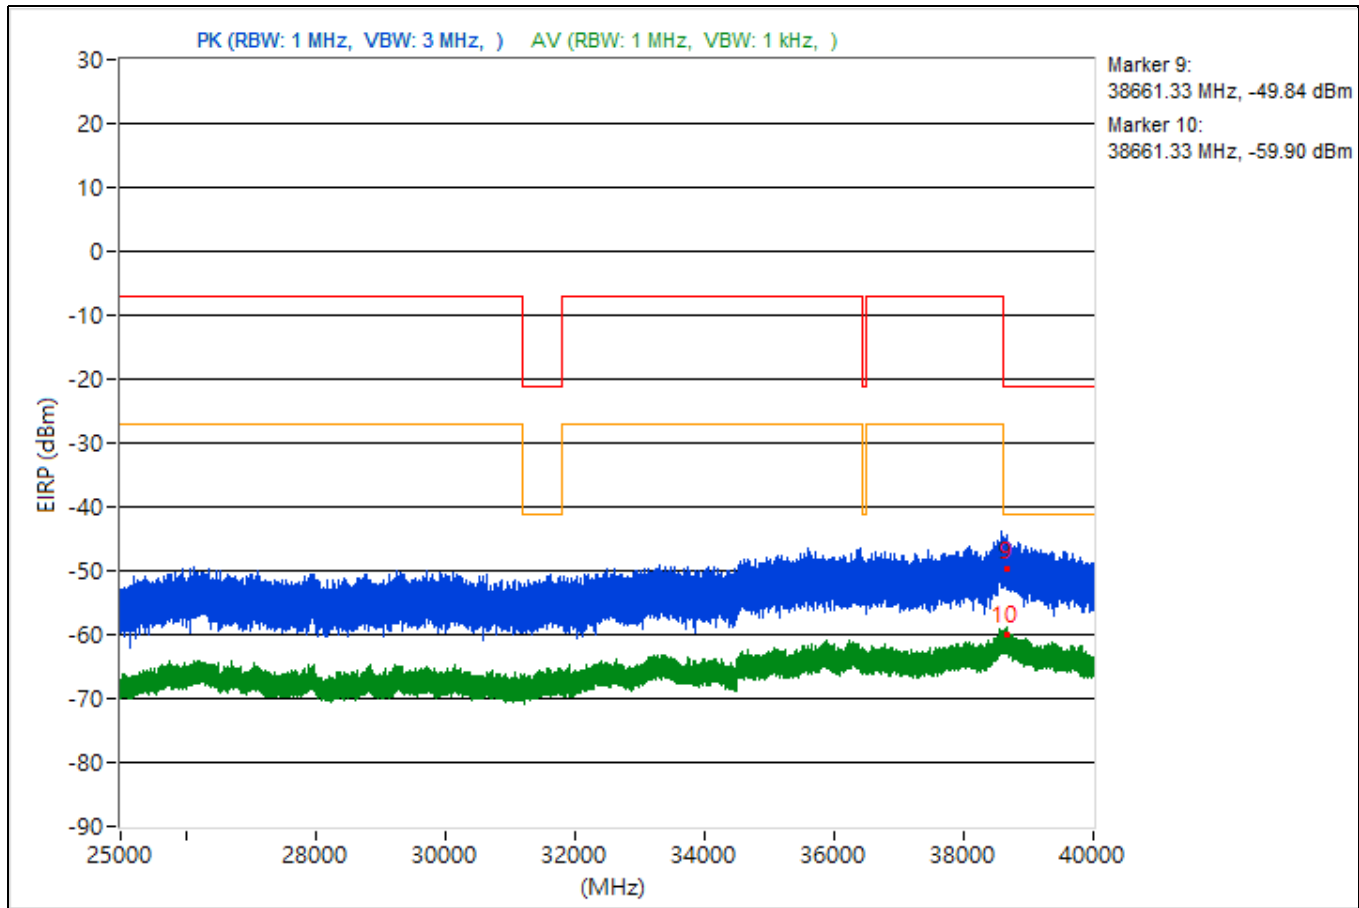


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3765.47	49.6 PK	74	-24.4	-53.88	-53.32	4.92	-45.66
2	3765.47	38.58 AV	54	-15.42	-63.93	-65.42	4.92	-56.68
3	14489.51	48.78 PK	74	-25.22	-54.91	-53.96	4.92	-46.48
4	14489.51	37.64 AV	54	-16.36	-64.56	-66.84	4.92	-57.62
5	19268.8	48.54 PK	74	-25.46	-54.13	-55.24	4.92	-46.72
6	19268.8	38.86 AV	54	-15.14	-65.55	-63.37	4.92	-56.4
7	23896.2	49.43 PK	74	-24.57	-52.72	-55.14	4.92	-45.83
8	23896.2	39.26 AV	54	-14.74	-62.55	-65.95	4.92	-56
9	38648.62	47.07 PK	74	-26.93	-55.19	-57.31	4.92	-48.19
10	38648.62	35.7 AV	54	-18.3	-69.87	-65.96	4.92	-59.56

Note: Margin value = Emission Level - Limit value

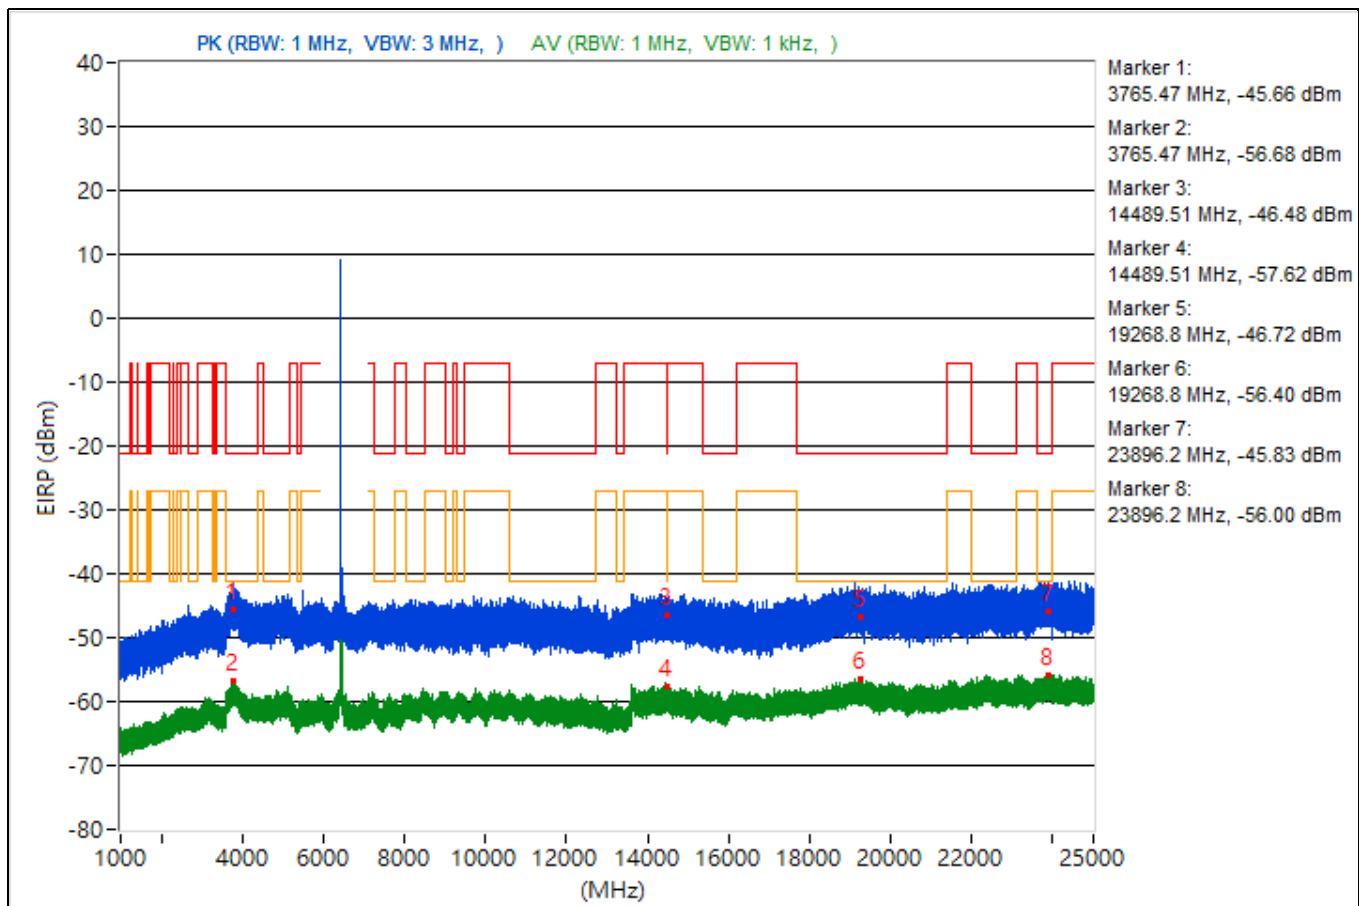


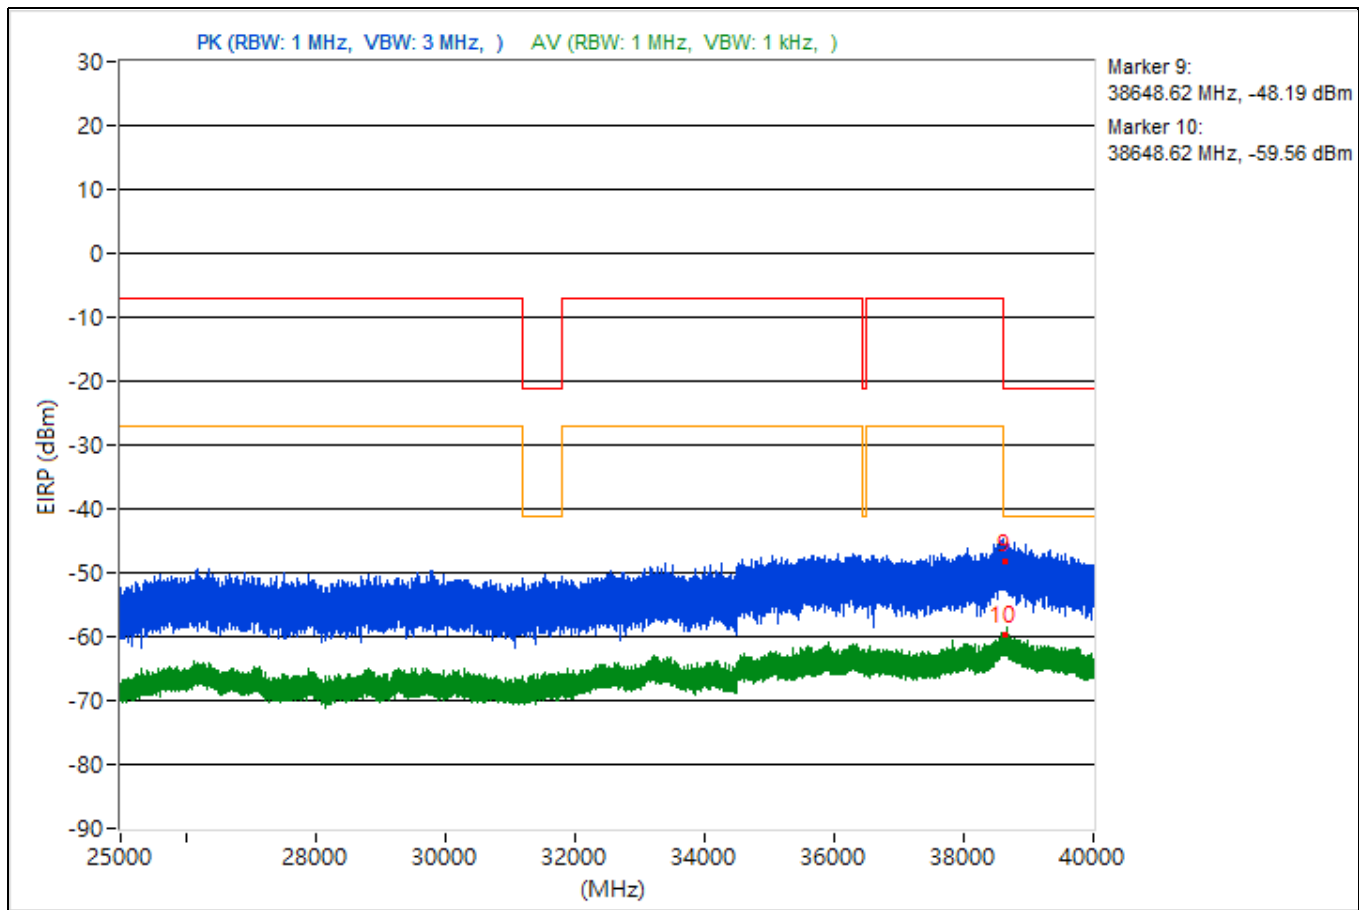


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.84	49.37 PK	74	-24.63	-54.06	-53.6	4.92	-45.89
2	3813.84	37.96 AV	54	-16.04	-63.65	-67.74	4.92	-57.3
3	14487.2	46.4 PK	74	-27.6	-56.78	-56.8	4.92	-48.86
4	14487.2	37.35 AV	54	-16.65	-67.13	-64.84	4.92	-57.91
5	19910.2	50.91 PK	74	-23.09	-52.63	-51.95	4.92	-44.35
6	19910.2	38.49 AV	54	-15.51	-66.16	-63.61	4.92	-56.77
7	23759.3	51.19 PK	74	-22.81	-54.54	-50.41	4.92	-44.07
8	23759.3	39.38 AV	54	-14.62	-65.3	-62.7	4.92	-55.88
9	38646.93	45.96 PK	74	-28.04	-58.05	-56.55	4.92	-49.3
10	38646.93	35.96 AV	54	-18.04	-65.44	-70.32	4.92	-59.3

Note: Margin value = Emission Level - Limit value

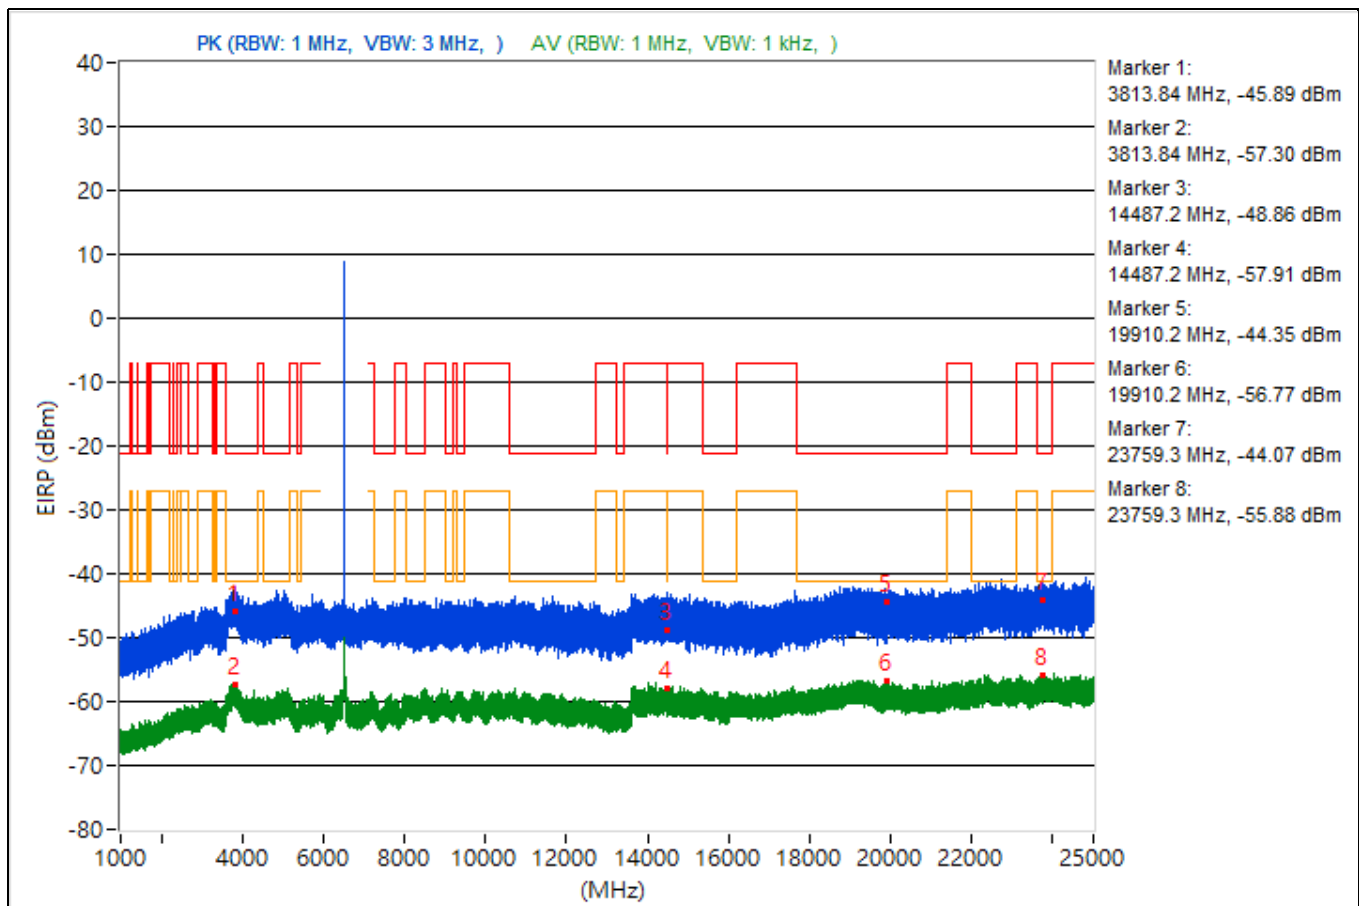


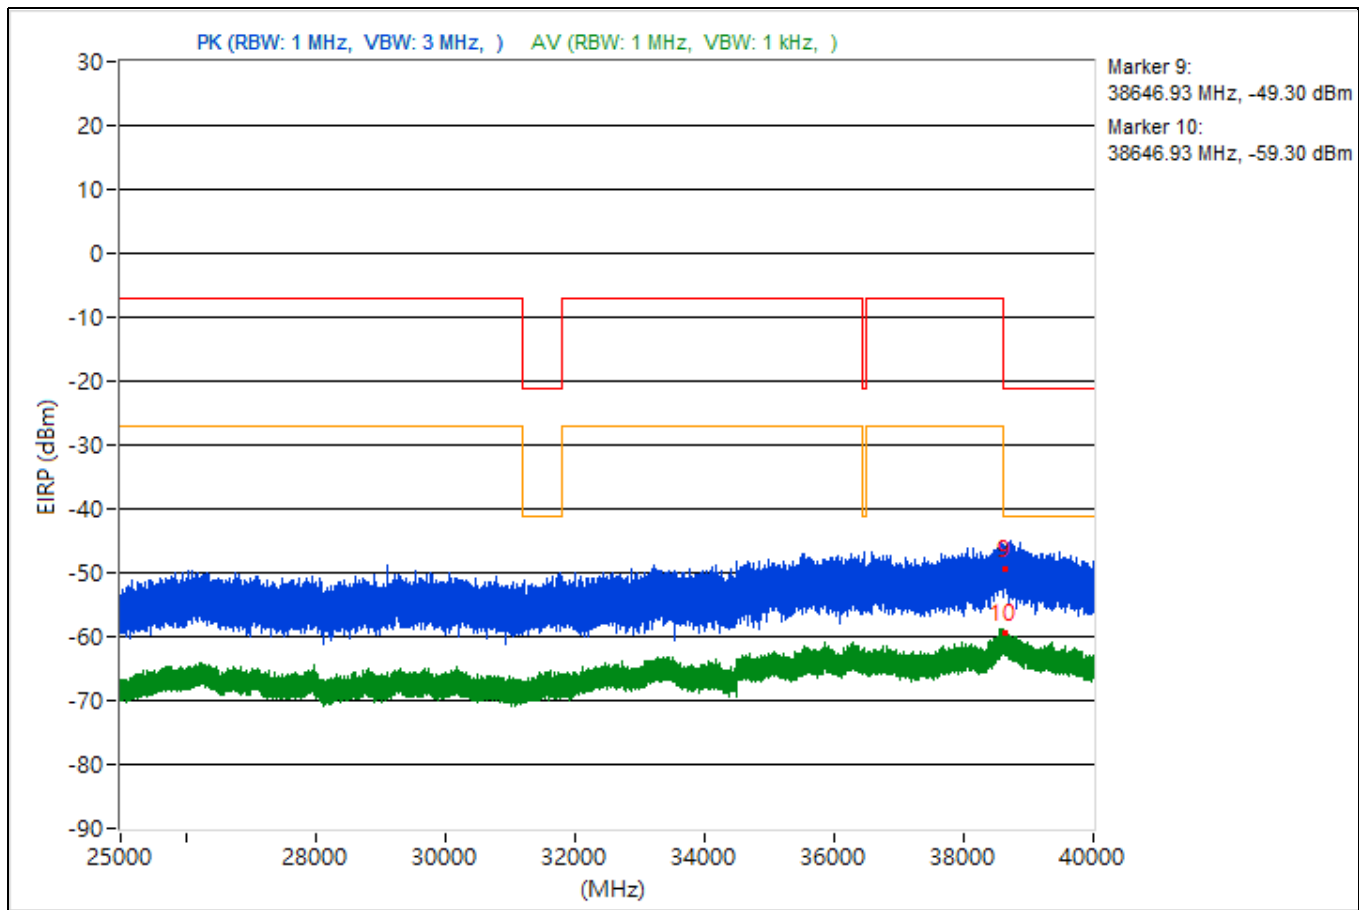


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3850.32	50.28 PK	74	-23.72	-51.46	-55.12	4.92	-44.98
2	3850.32	37.71 AV	54	-16.29	-66.64	-64.56	4.92	-57.55
3	14486.84	51.29 PK	74	-22.71	-50.51	-53.97	4.92	-43.97
4	14486.84	37.62 AV	54	-16.38	-64.41	-67.14	4.92	-57.64
5	19209.8	48.57 PK	74	-25.43	-54.71	-54.53	4.92	-46.69
6	19209.8	38.32 AV	54	-15.68	-67.13	-63.39	4.92	-56.94
7	23718	49.53 PK	74	-24.47	-53.47	-53.87	4.92	-45.73
8	23718	39.09 AV	54	-14.91	-62.47	-66.76	4.92	-56.17
9	38605.33	47.06 PK	74	-26.94	-55.2	-57.31	4.92	-48.2
10	38605.33	36.04 AV	54	-17.96	-66.2	-68.39	4.92	-59.22

Note: Margin value = Emission Level - Limit value

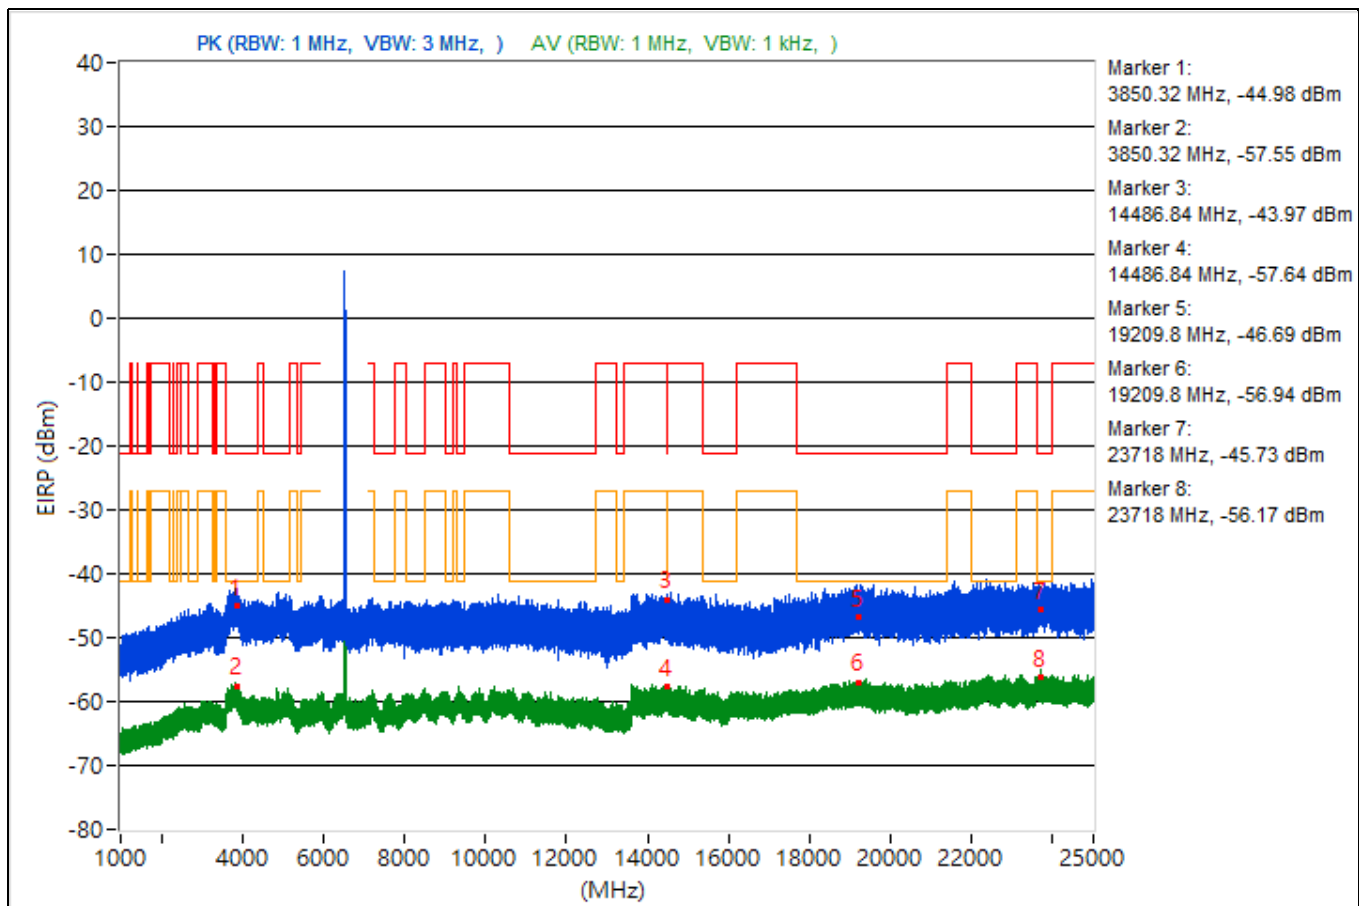


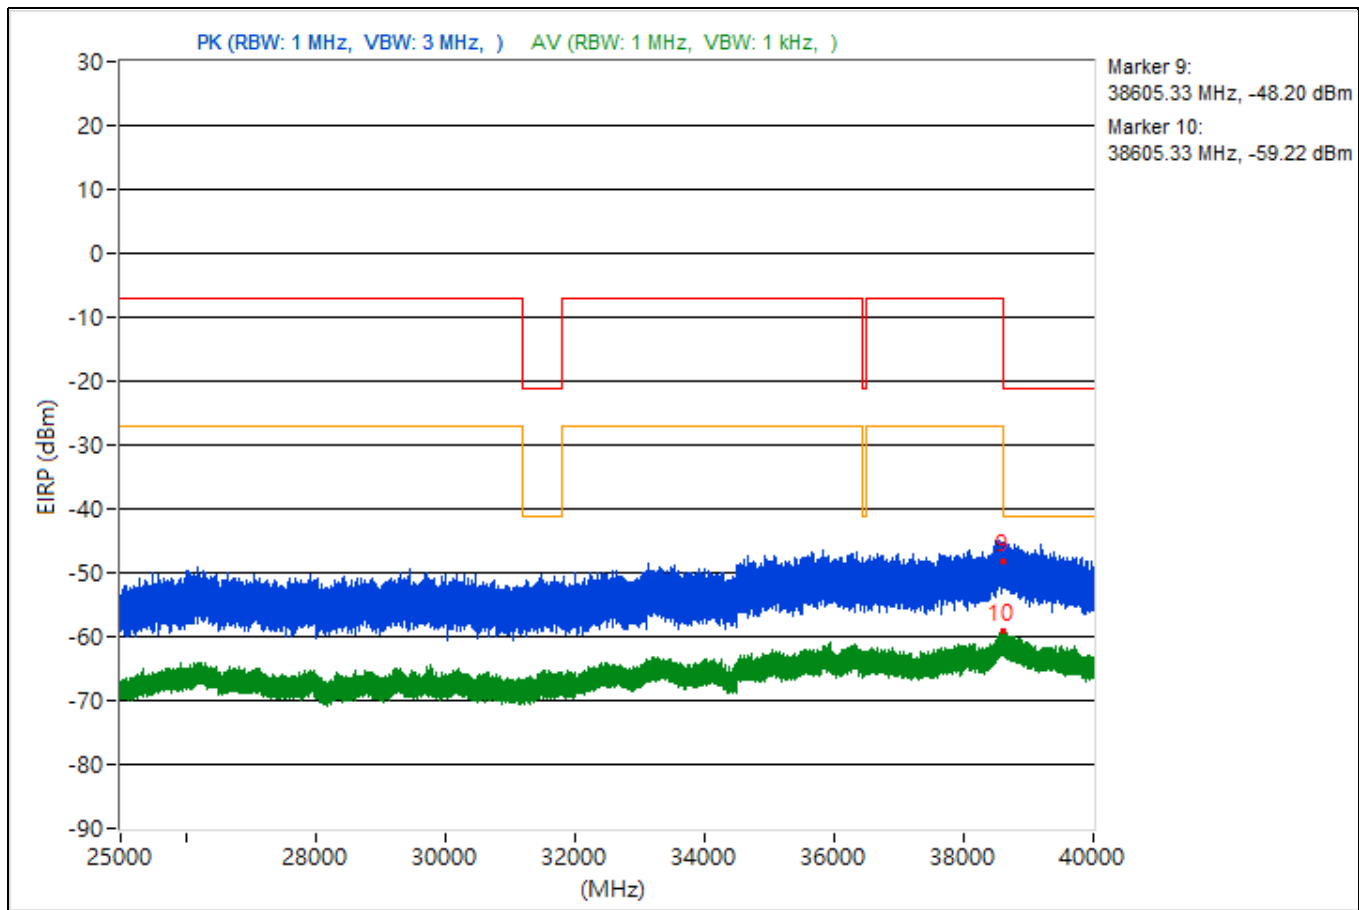


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.51	48.37 PK	74	-25.63	-54.01	-55.81	4.92	-46.89
2	3811.51	38.26 AV	54	-15.74	-66.48	-63.8	4.92	-57
3	8493.33	47.75 PK	74	-26.25	-54.41	-56.81	4.92	-47.51
4	8493.33	37.22 AV	54	-16.78	-68.02	-64.58	4.92	-58.04
5	19200.3	49.46 PK	74	-24.54	-51.99	-56.68	4.92	-45.8
6	19200.3	38.58 AV	54	-15.42	-63.34	-66.42	4.92	-56.68
7	23953.4	49.84 PK	74	-24.16	-56.21	-51.63	4.92	-45.42
8	23953.4	38.87 AV	54	-15.13	-66.41	-62.92	4.92	-56.39
9	38602.13	44.98 PK	74	-29.02	-58.55	-57.91	4.92	-50.28
10	38602.13	35.43 AV	54	-18.57	-66.47	-69.6	4.92	-59.83

Note: Margin value = Emission Level - Limit value

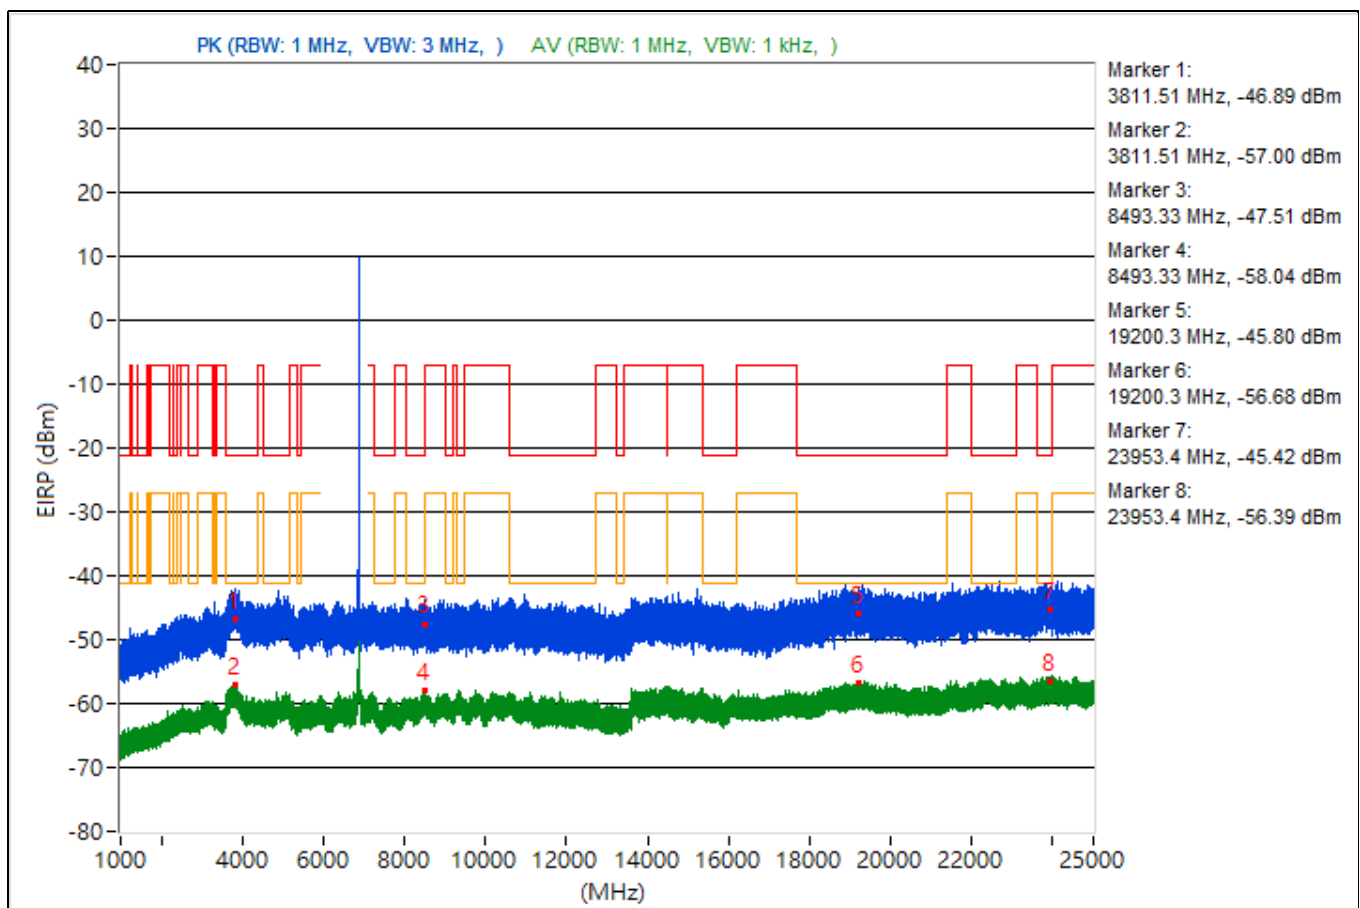


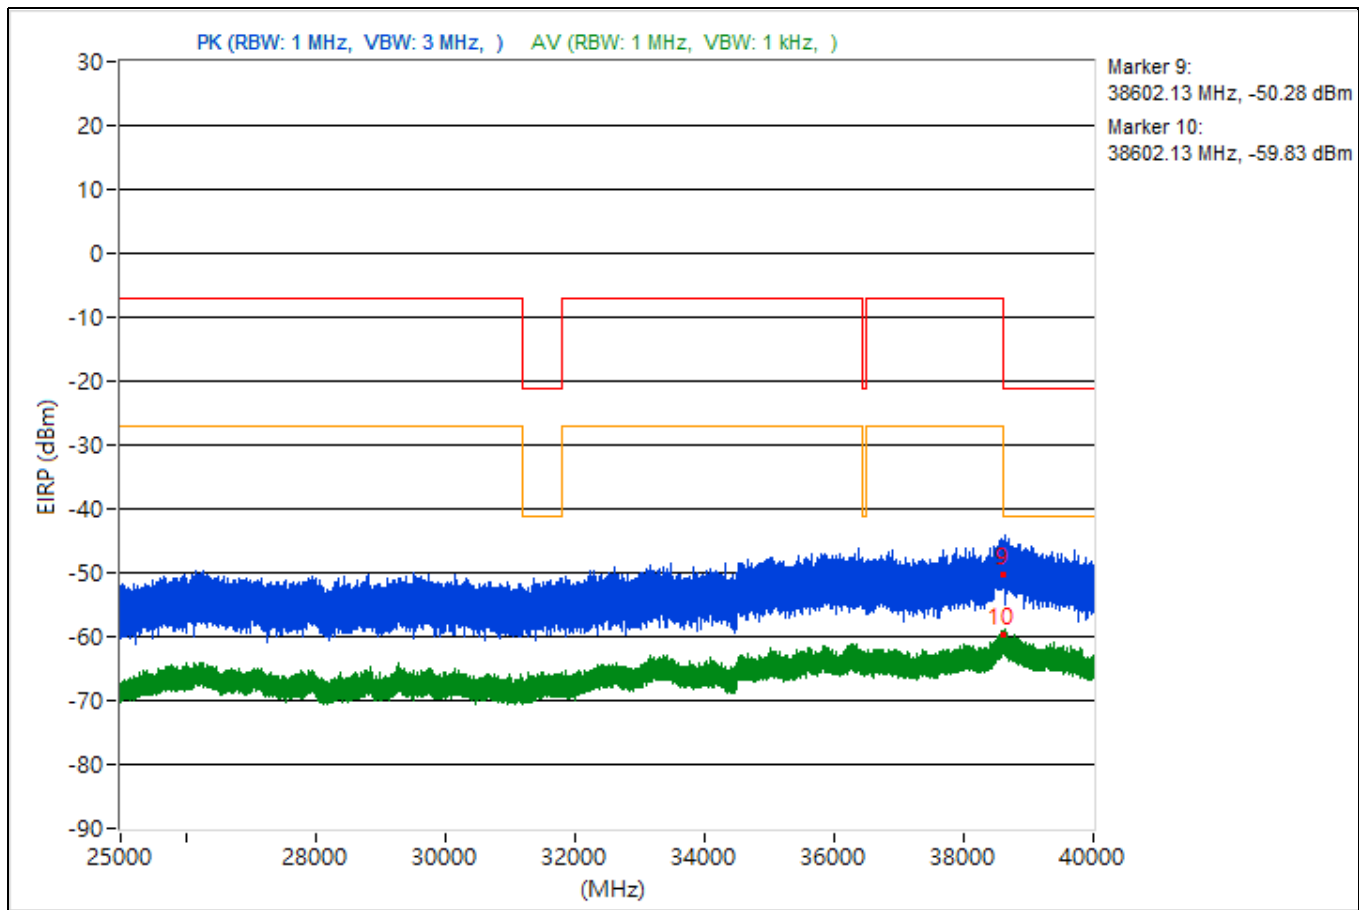


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3710.63	48.9 PK	74	-25.1	-55.14	-53.59	4.92	-46.36
2	3710.63	37.82 AV	54	-16.18	-66.46	-64.51	4.92	-57.44
3	14495.73	48.28 PK	74	-25.72	-56.07	-53.99	4.92	-46.98
4	14495.73	36.95 AV	54	-17.05	-64.79	-68.44	4.92	-58.31
5	19341.4	48.12 PK	74	-25.88	-59.36	-52.96	4.92	-47.14
6	19341.4	38.52 AV	54	-15.48	-66.98	-63.17	4.92	-56.74
7	22394.2	47.33 PK	74	-26.67	-55.91	-55.8	4.92	-47.93
8	22394.2	39.24 AV	54	-14.76	-65.93	-62.6	4.92	-56.02
9	38650.22	45.66 PK	74	-28.34	-58.44	-56.77	4.92	-49.6
10	38650.22	36.12 AV	54	-17.88	-66.21	-68.14	4.92	-59.14

Note: Margin value = Emission Level - Limit value

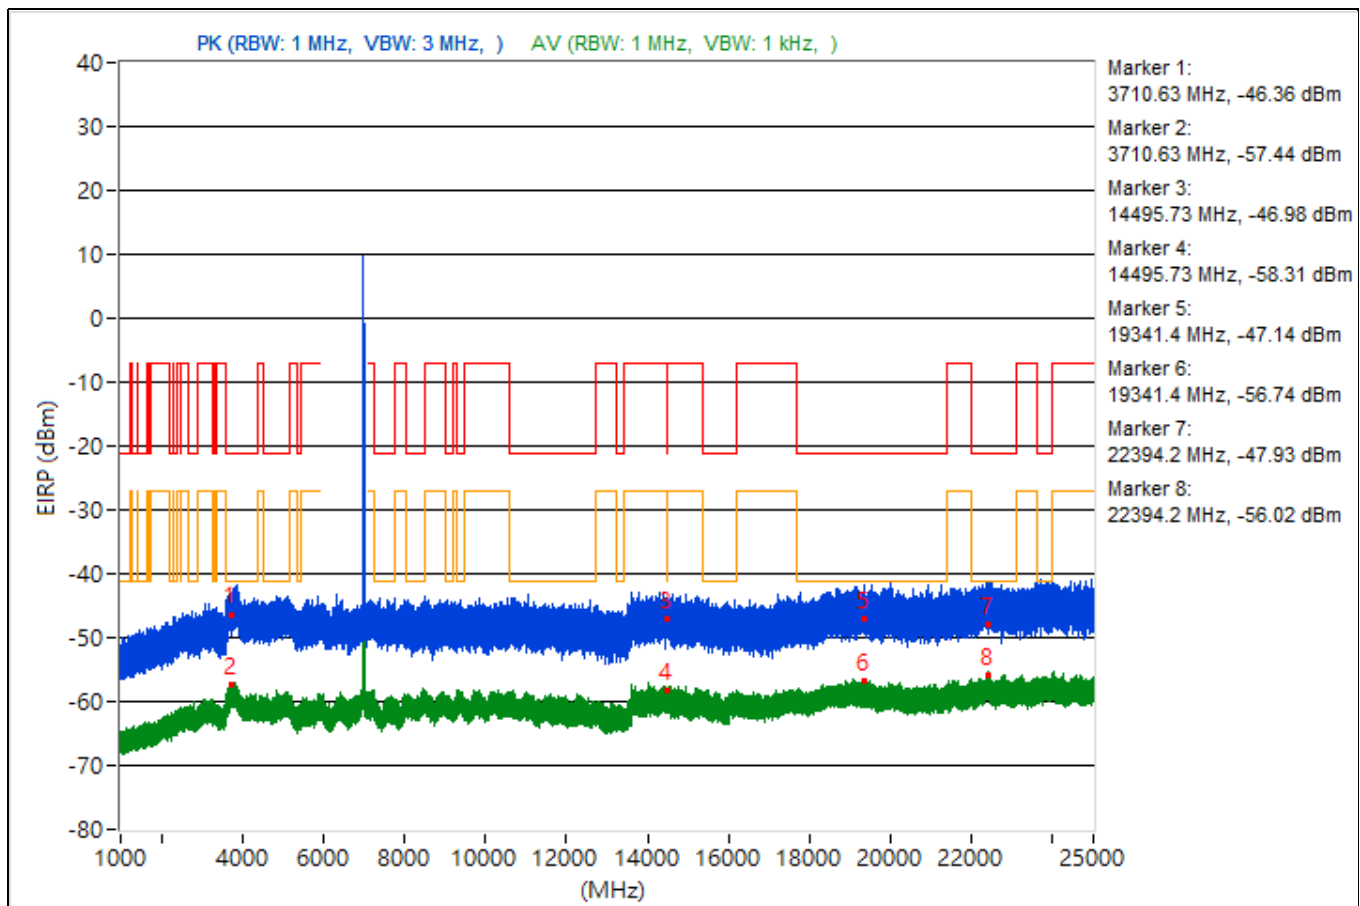


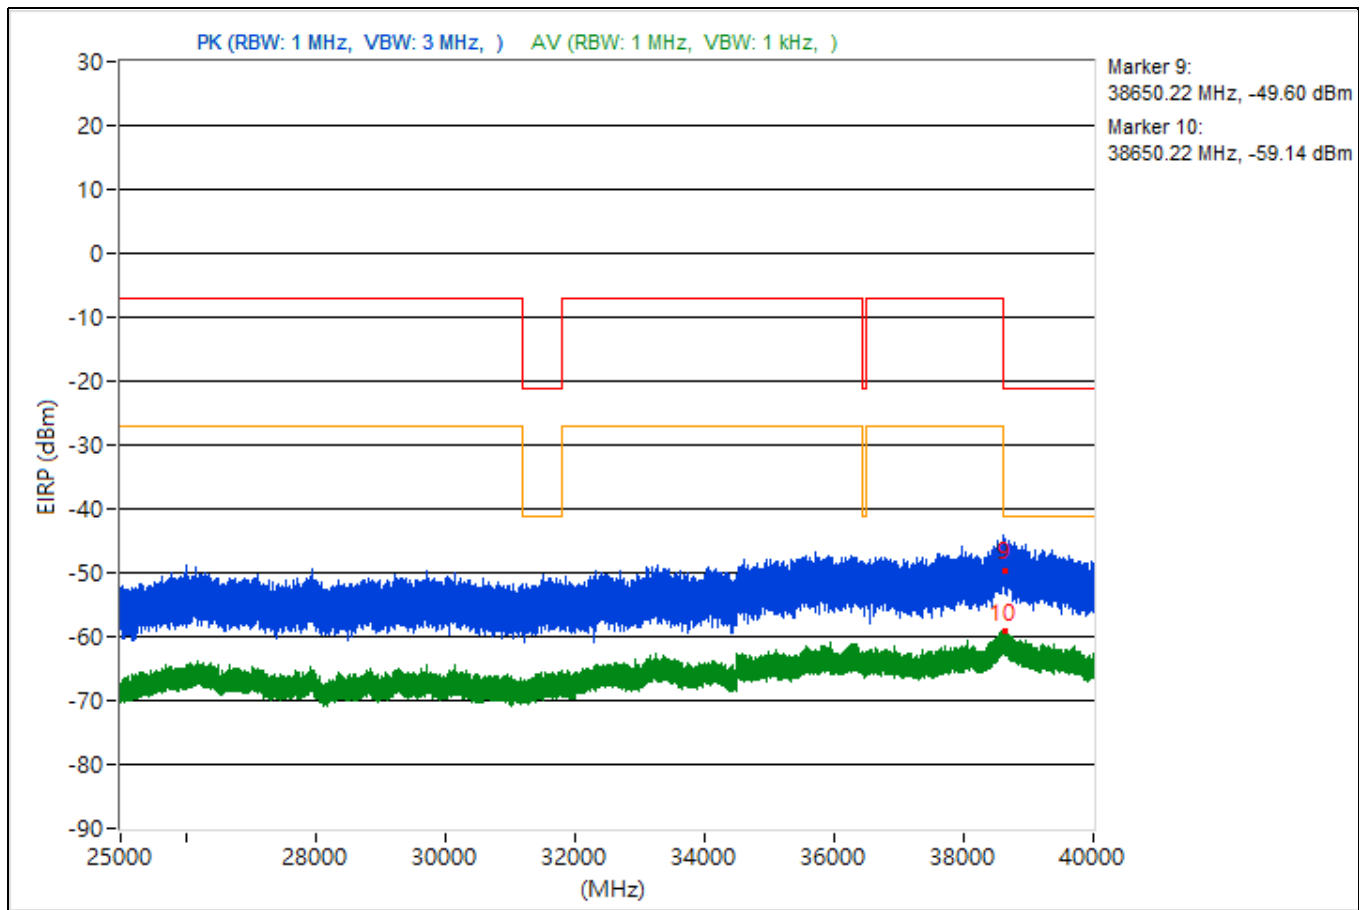


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.89	50.2 PK	74	-23.8	-52.46	-53.6	4.92	-45.06
2	3754.89	37.62 AV	54	-16.38	-63.98	-68.09	4.92	-57.64
3	15383.47	46.96 PK	74	-27.04	-56	-56.47	4.92	-48.3
4	15383.47	36.73 AV	54	-17.27	-69.29	-64.77	4.92	-58.53
5	18954.9	47.24 PK	74	-26.76	-58.01	-54.56	4.92	-48.02
6	18954.9	38.68 AV	54	-15.32	-66.29	-63.25	4.92	-56.58
7	22344.7	48.44 PK	74	-25.56	-53.75	-56.06	4.92	-46.82
8	22344.7	39.14 AV	54	-14.86	-62.8	-65.81	4.92	-56.12
9	38618.67	45.48 PK	74	-28.52	-56.48	-59.41	4.92	-49.78
10	38618.67	35.96 AV	54	-18.04	-68.6	-66.18	4.92	-59.3

Note: Margin value = Emission Level - Limit value

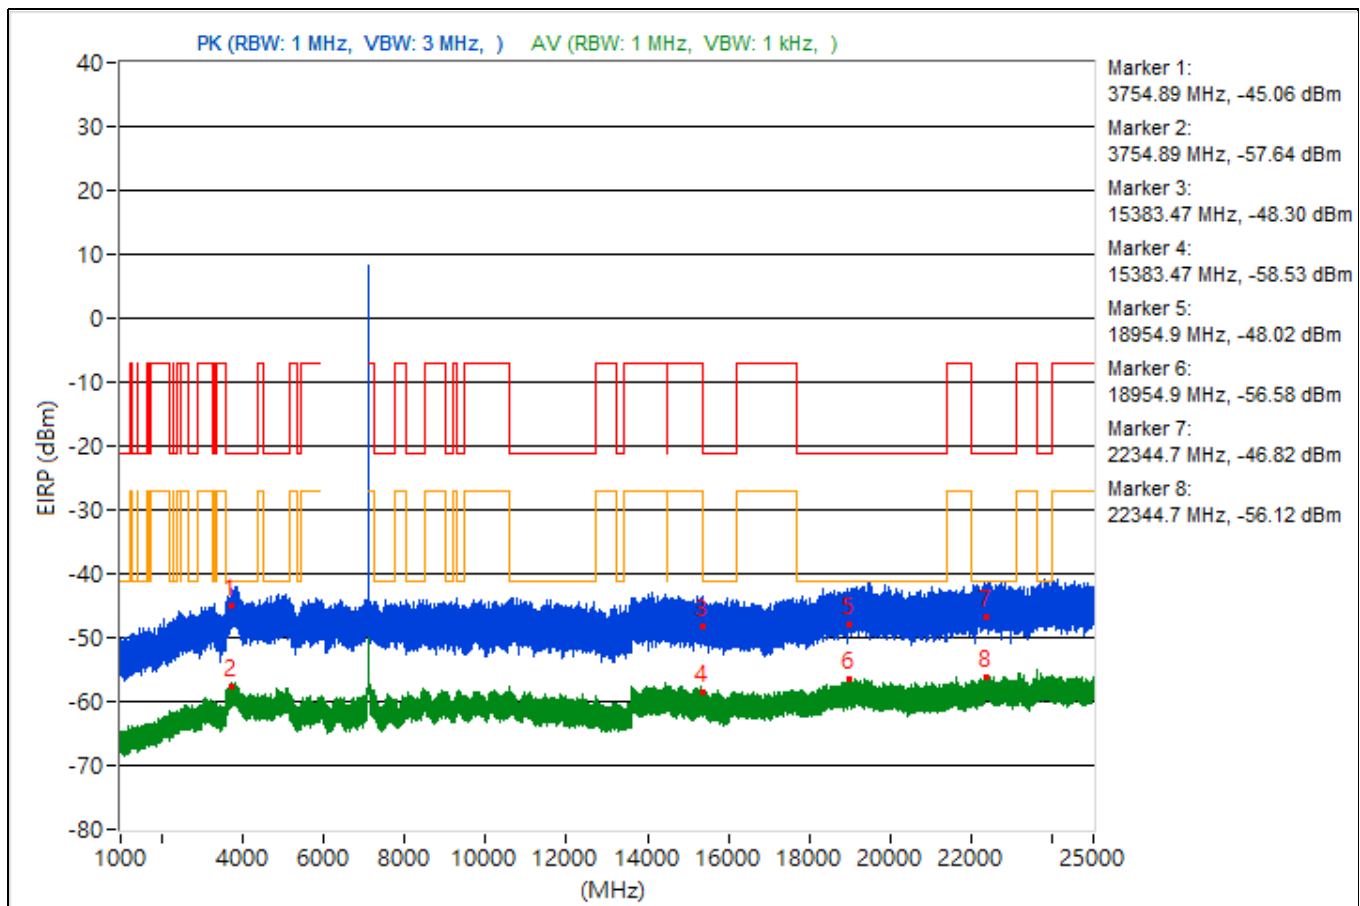


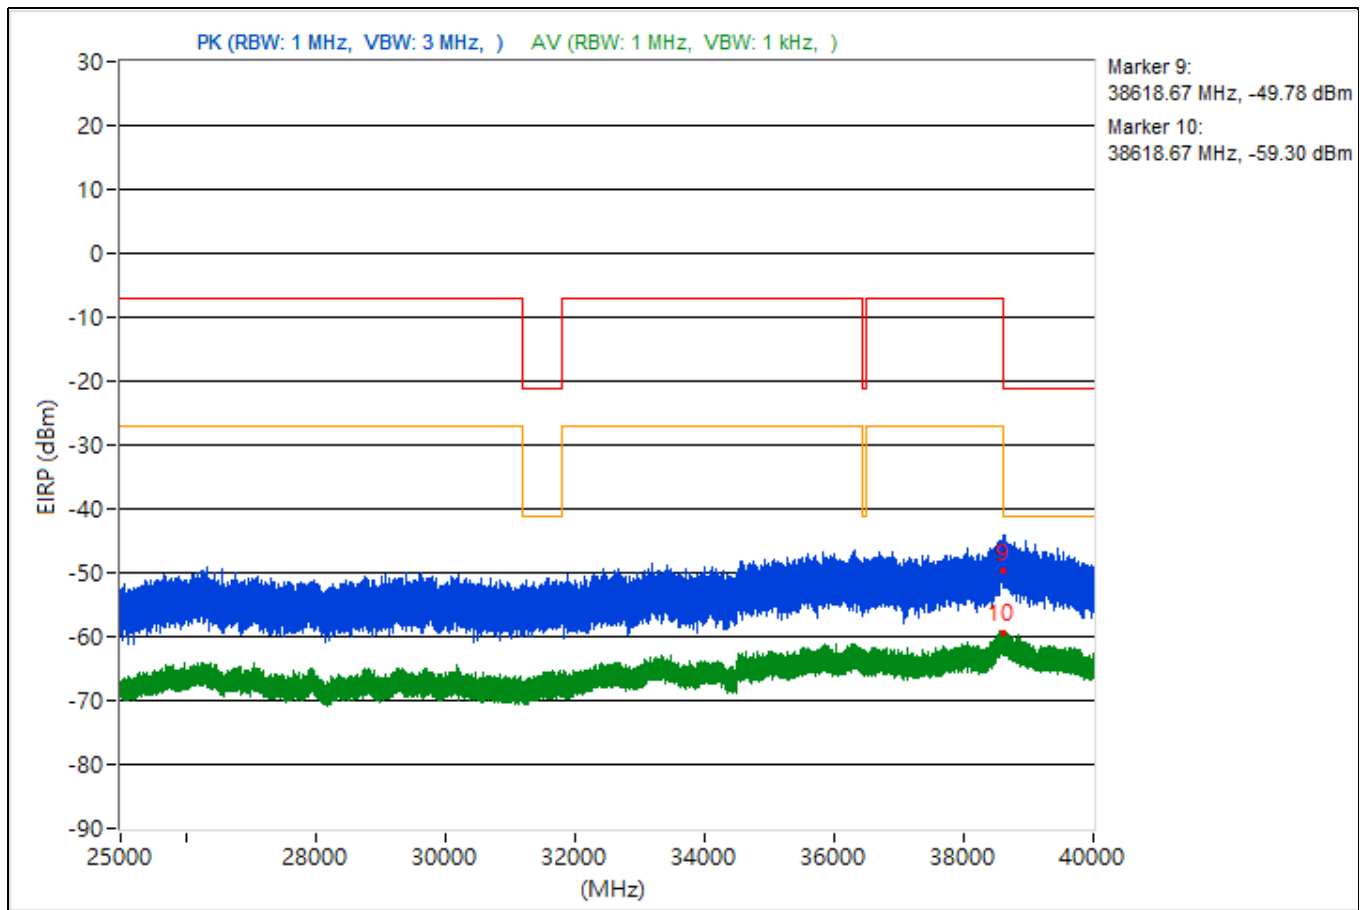


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3773.79	50.4 PK	74	-23.6	-54.13	-51.77	4.92	-44.86
2	3773.79	38.46 AV	54	-15.54	-63.51	-66.43	4.92	-56.8
3	14483.2	49.17 PK	74	-24.83	-54.67	-53.46	4.92	-46.09
4	14483.2	37.38 AV	54	-16.62	-68.83	-64.04	4.92	-57.88
5	19418	48.3 PK	74	-25.7	-54.1	-55.86	4.92	-46.96
6	19418	38.59 AV	54	-15.41	-63.6	-65.9	4.92	-56.67
7	22330.2	49.6 PK	74	-24.4	-52.77	-54.61	4.92	-45.66
8	22330.2	39.3 AV	54	-14.7	-65.74	-62.59	4.92	-55.96
9	38663.73	47.56 PK	74	-26.44	-55.21	-56.11	4.92	-47.7
10	38663.73	35.78 AV	54	-18.22	-70.21	-65.73	4.92	-59.48

Note: Margin value = Emission Level - Limit value

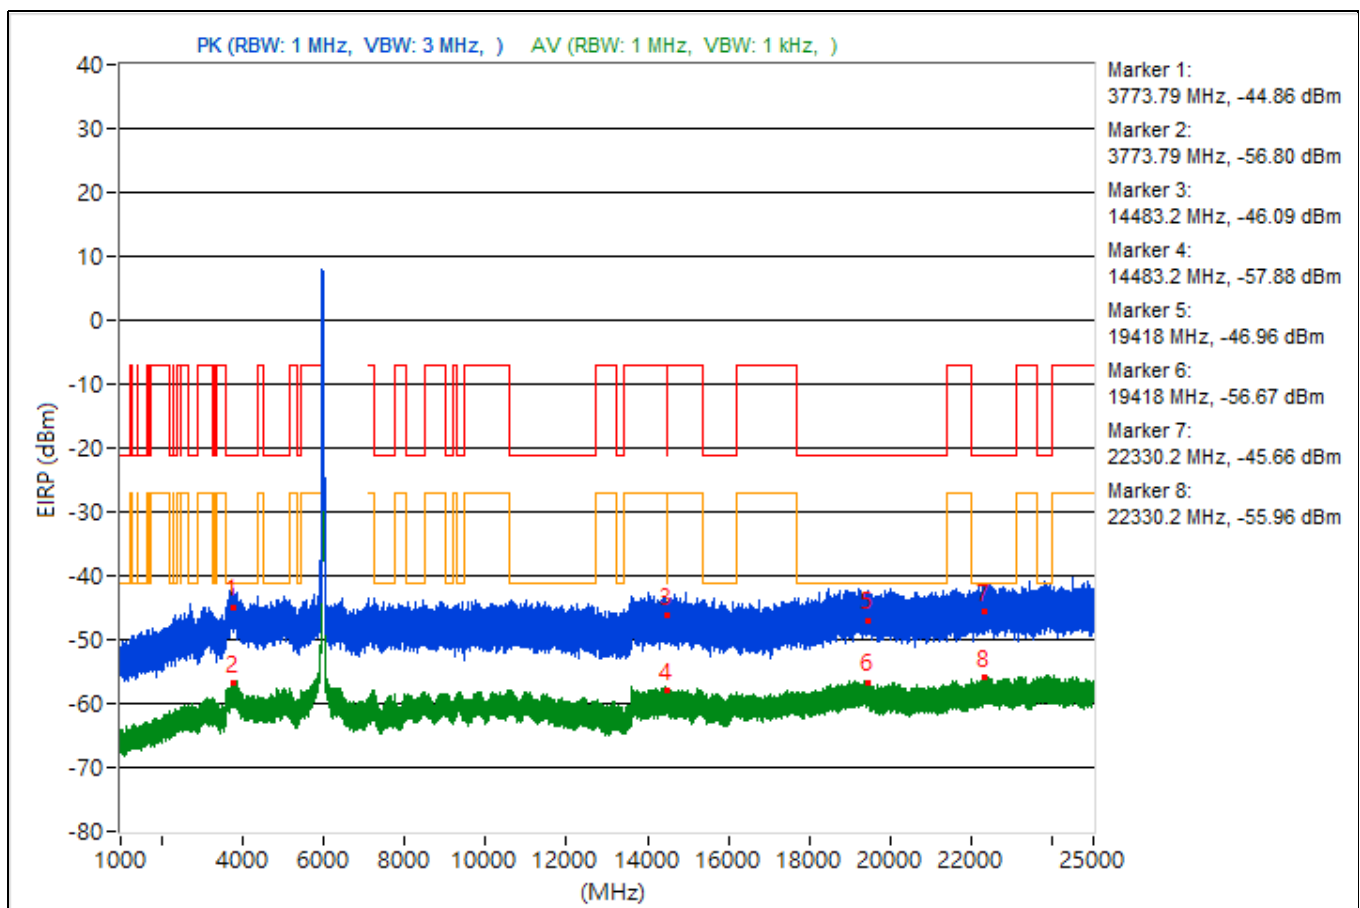


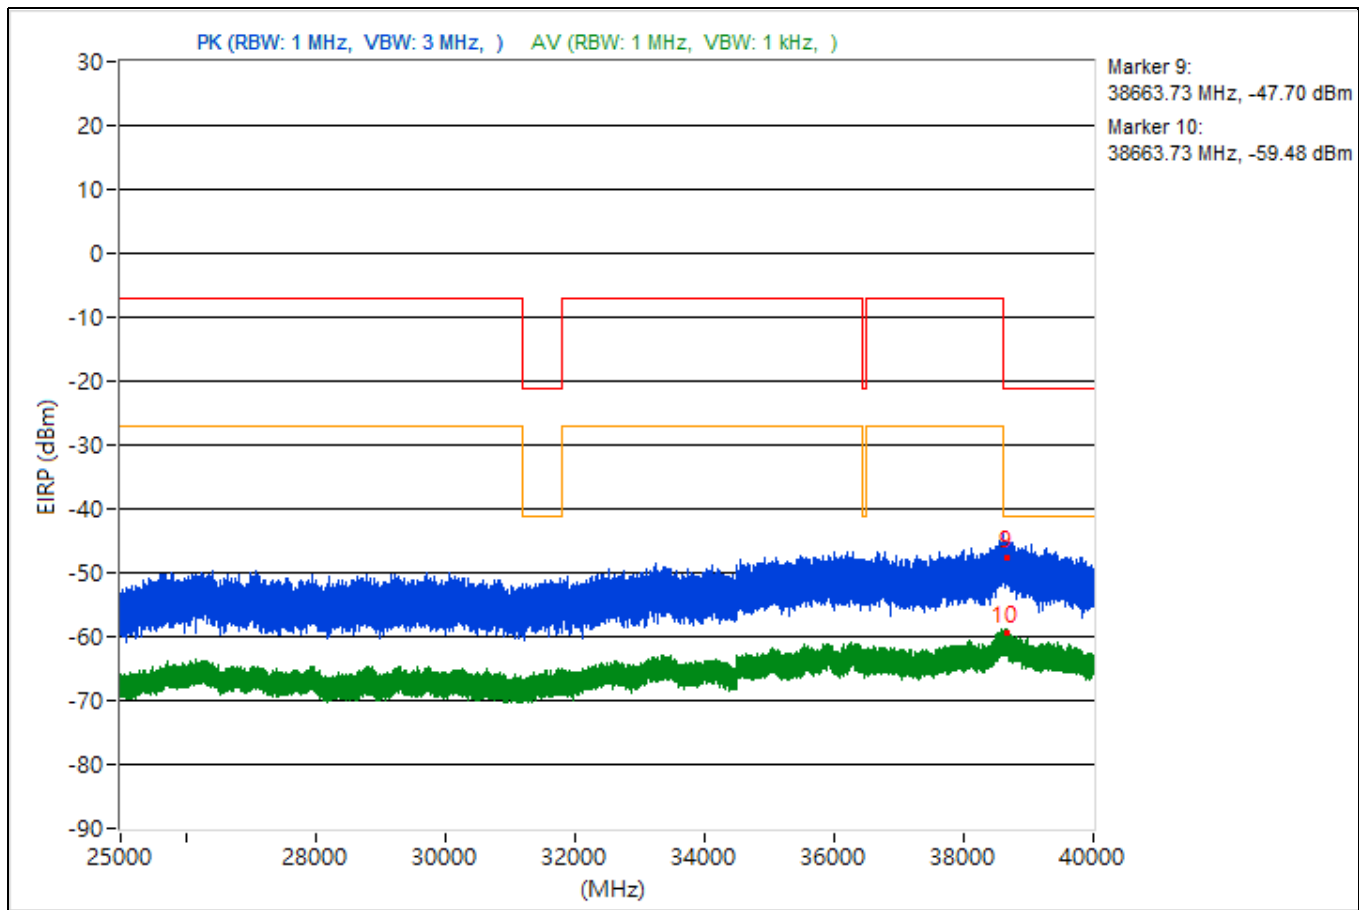


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3744.39	49.71 PK	74	-24.29	-53.54	-53.42	4.92	-45.55
2	3744.39	38.63 AV	54	-15.37	-65.68	-63.68	4.92	-56.63
3	10649.33	46.59 PK	74	-27.41	-58.4	-55.32	4.92	-48.67
4	10649.33	37.49 AV	54	-16.51	-65.12	-66.38	4.92	-57.77
5	19139.9	51.7 PK	74	-22.3	-50.86	-52.22	4.92	-43.56
6	19139.9	41.53 AV	54	-12.47	-62.76	-60.78	4.92	-53.73
7	23685.6	50.33 PK	74	-23.67	-52.24	-53.6	4.92	-44.93
8	23685.6	39.54 AV	54	-14.46	-65.84	-62.2	4.92	-55.72
9	38630.67	46.97 PK	74	-27.03	-58.08	-54.93	4.92	-48.29
10	38630.67	36.57 AV	54	-17.43	-67.38	-65.97	4.92	-58.69

Note: Margin value = Emission Level - Limit value

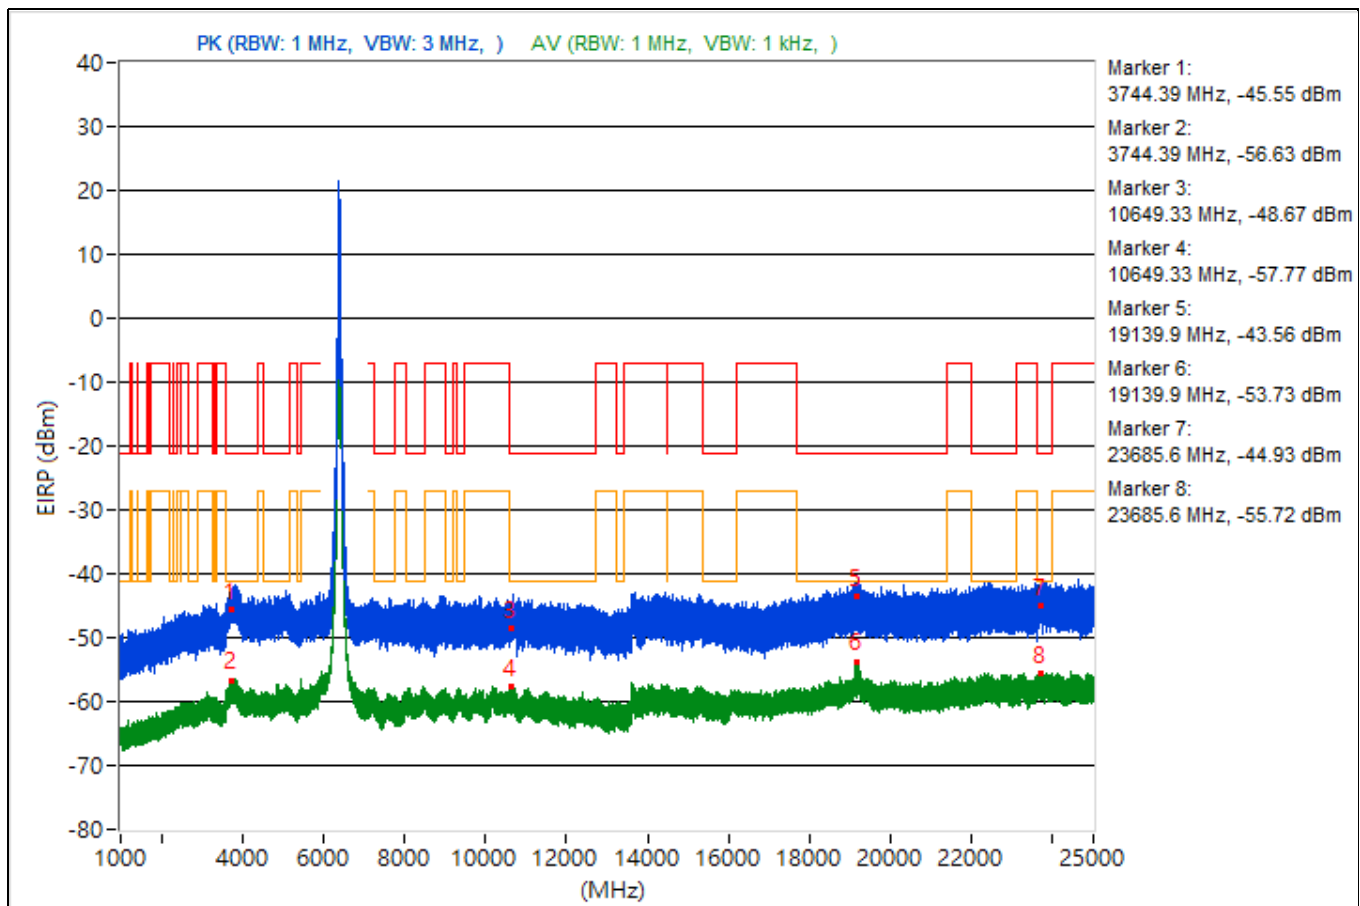


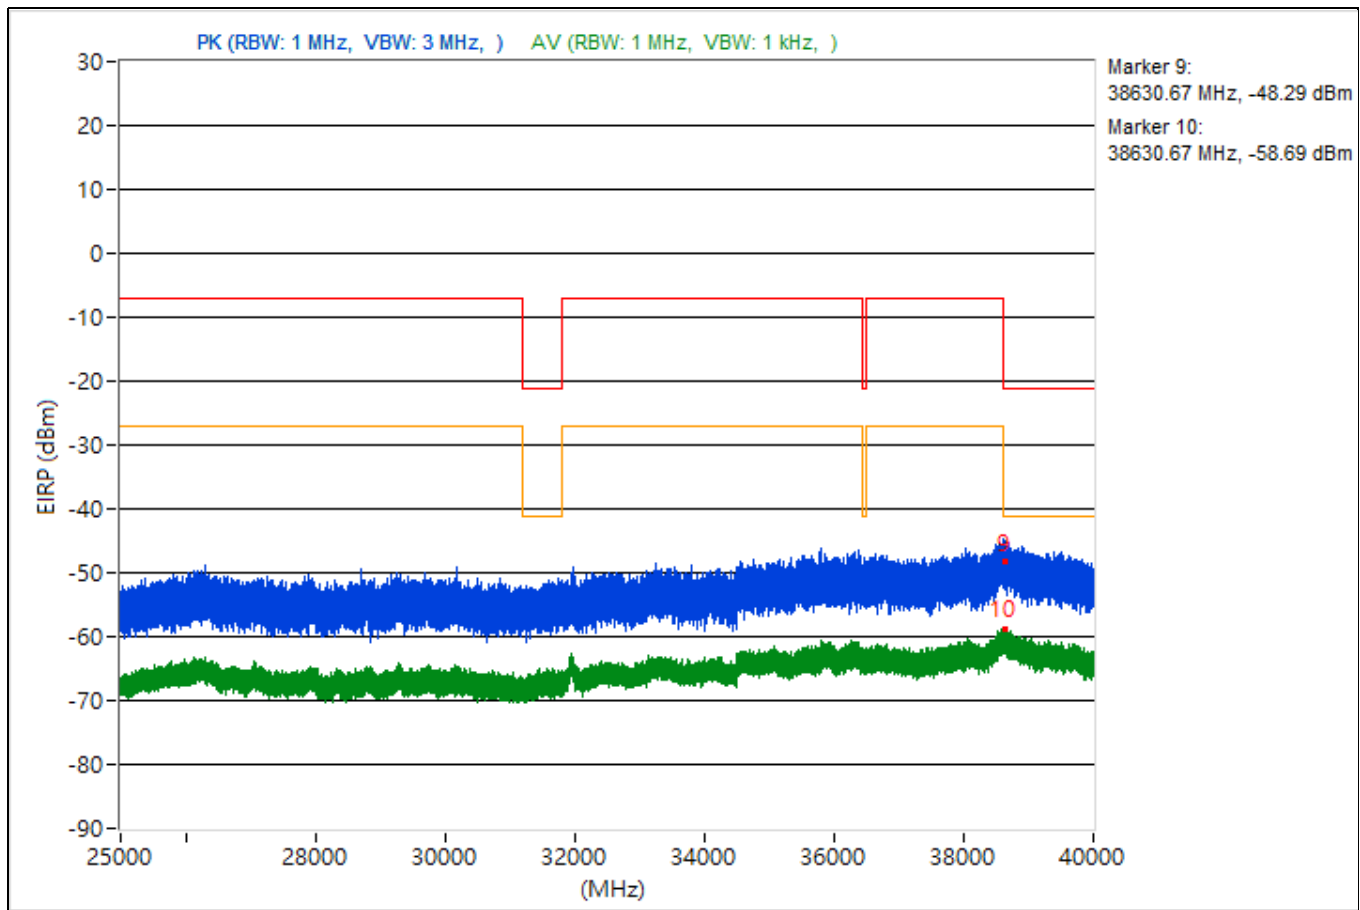


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3784.99	49.6 PK	74	-24.4	-54.07	-53.15	4.92	-45.66
2	3784.99	38.22 AV	54	-15.78	-63.97	-66.26	4.92	-57.04
3	14483.73	49.31 PK	74	-24.69	-54.5	-53.34	4.92	-45.95
4	14483.73	38.06 AV	54	-15.94	-64.26	-66.22	4.92	-57.2
5	19360	48.92 PK	74	-25.08	-53.38	-55.39	4.92	-46.34
6	19360	39.23 AV	54	-14.77	-65.89	-62.62	4.92	-56.03
7	22391.7	47.71 PK	74	-26.29	-55.91	-55.09	4.92	-47.55
8	22391.7	39.57 AV	54	-14.43	-62.34	-65.44	4.92	-55.69
9	38685.51	44.91 PK	74	-29.09	-57.15	-59.83	4.92	-50.35
10	38685.51	35.93 AV	54	-18.07	-68.59	-66.25	4.92	-59.33

Note: Margin value = Emission Level - Limit value

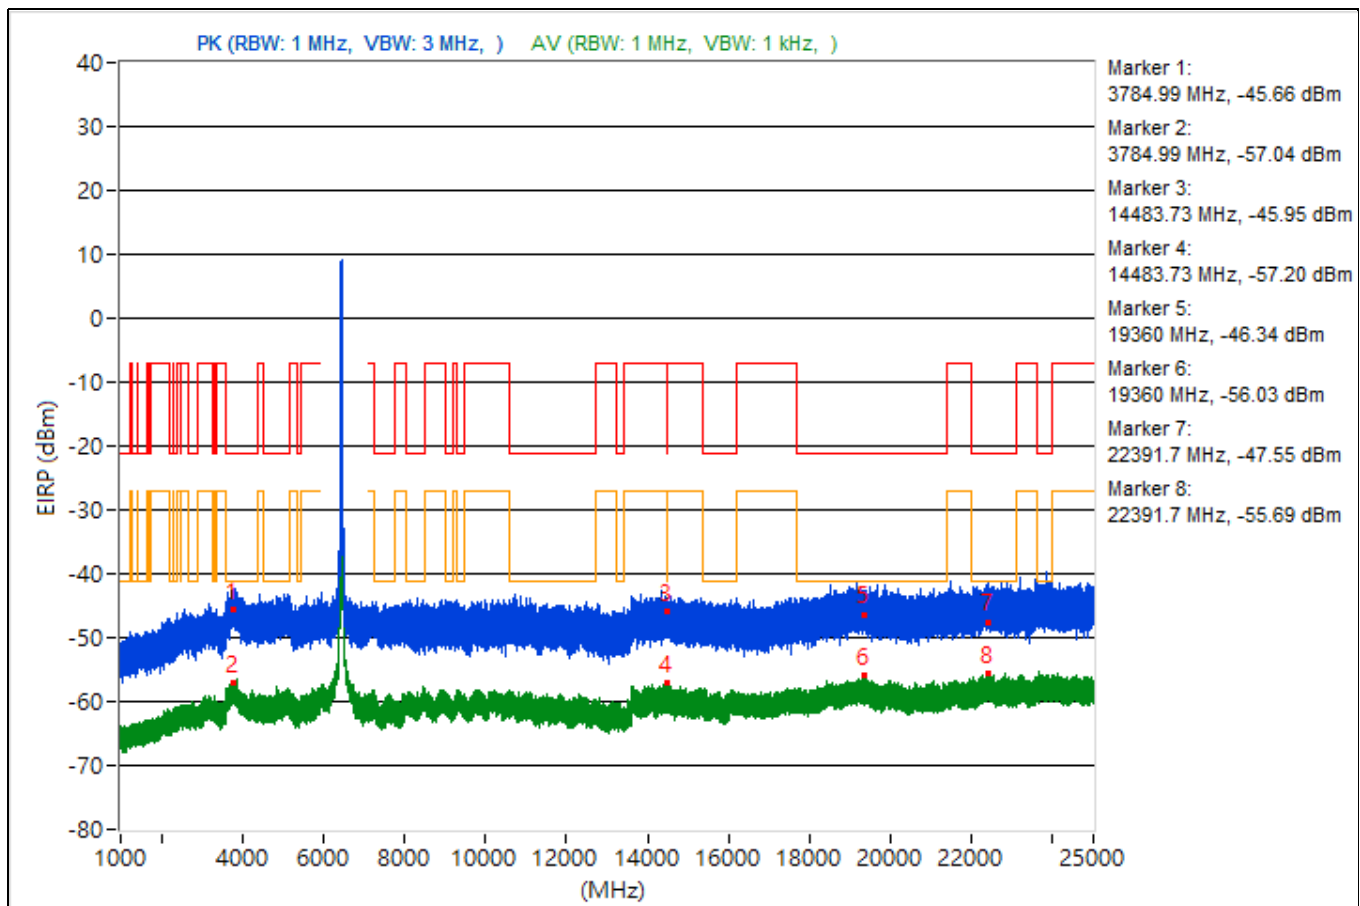


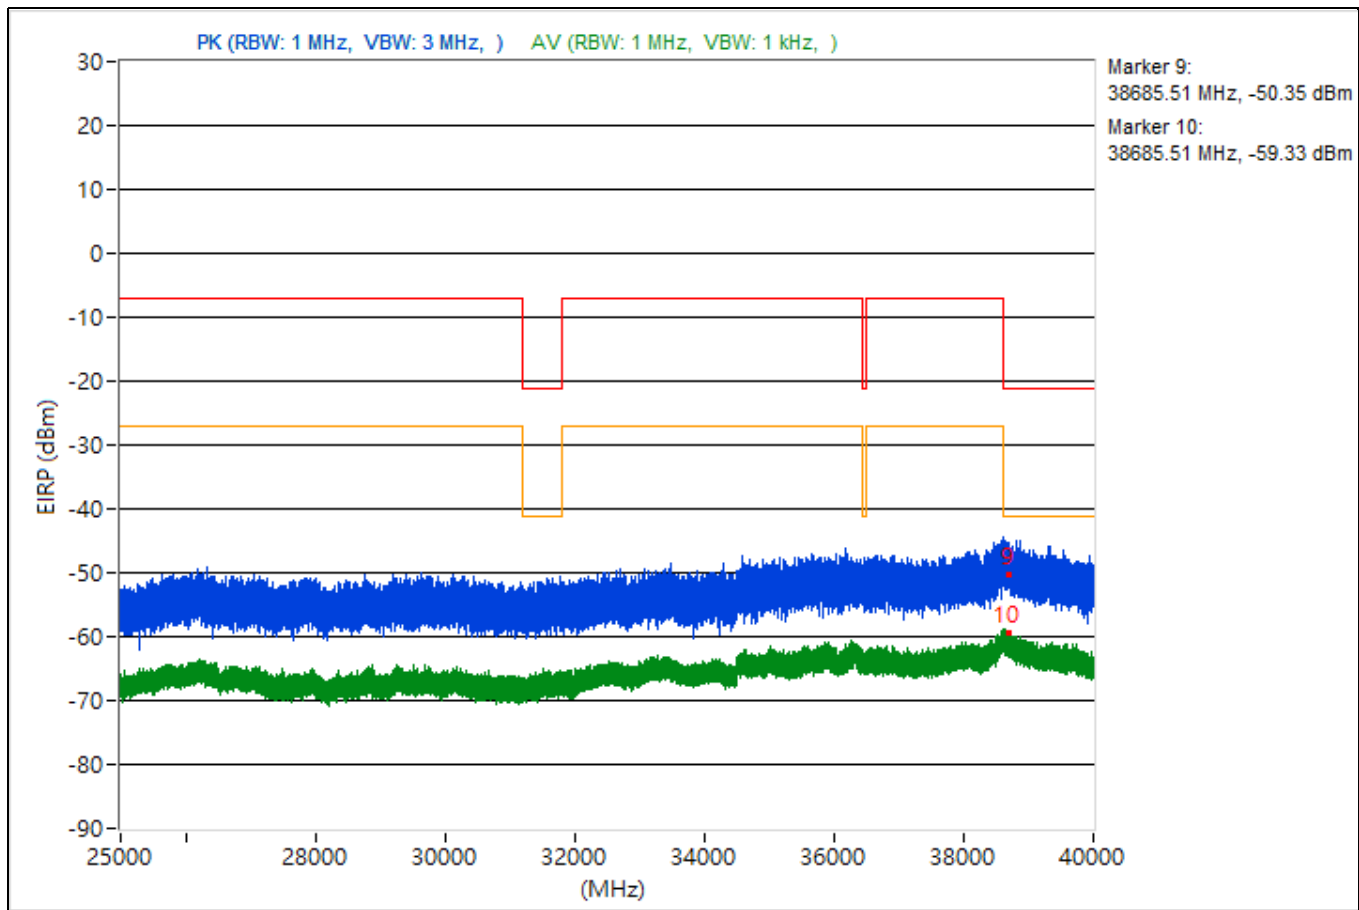


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3752.56	48.12 PK	74	-25.88	-55.19	-54.95	4.92	-47.14
2	3752.56	38.23 AV	54	-15.77	-66.87	-63.64	4.92	-57.03
3	14492.71	51.08 PK	74	-22.92	-51.42	-52.94	4.92	-44.18
4	14492.71	36.77 AV	54	-17.23	-65.05	-68.46	4.92	-58.49
5	19404.3	48.08 PK	74	-25.92	-54.99	-55.23	4.92	-47.18
6	19404.3	38.76 AV	54	-15.24	-65.84	-63.37	4.92	-56.5
7	22789.3	50.5 PK	74	-23.5	-52.35	-53.07	4.92	-44.76
8	22789.3	39.66 AV	54	-14.34	-64.83	-62.54	4.92	-55.6
9	38651.29	45.4 PK	74	-28.6	-57.51	-58.08	4.92	-49.86
10	38651.29	35.68 AV	54	-18.32	-69.99	-65.95	4.92	-59.58

Note: Margin value = Emission Level - Limit value

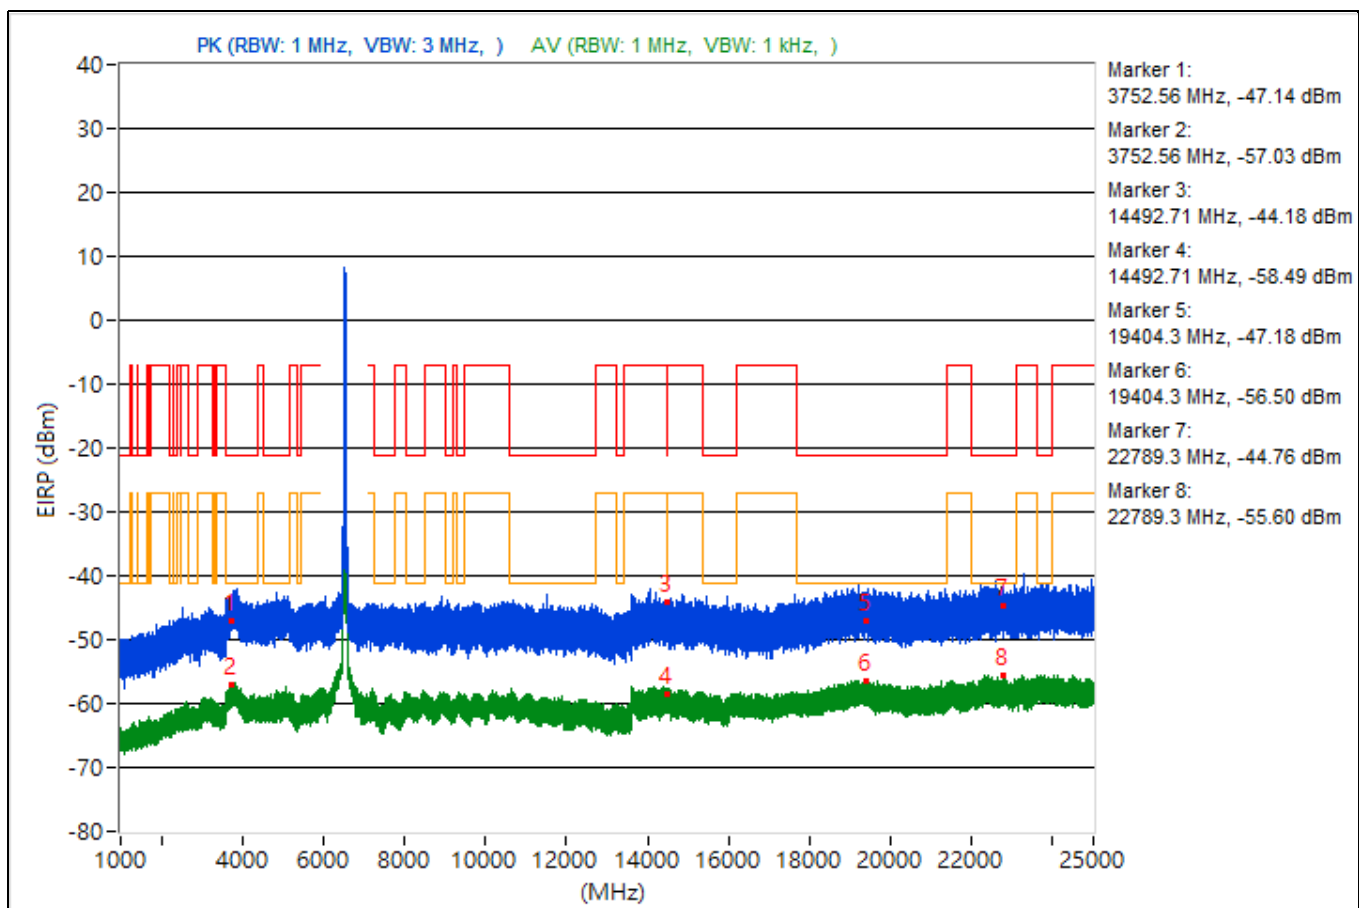


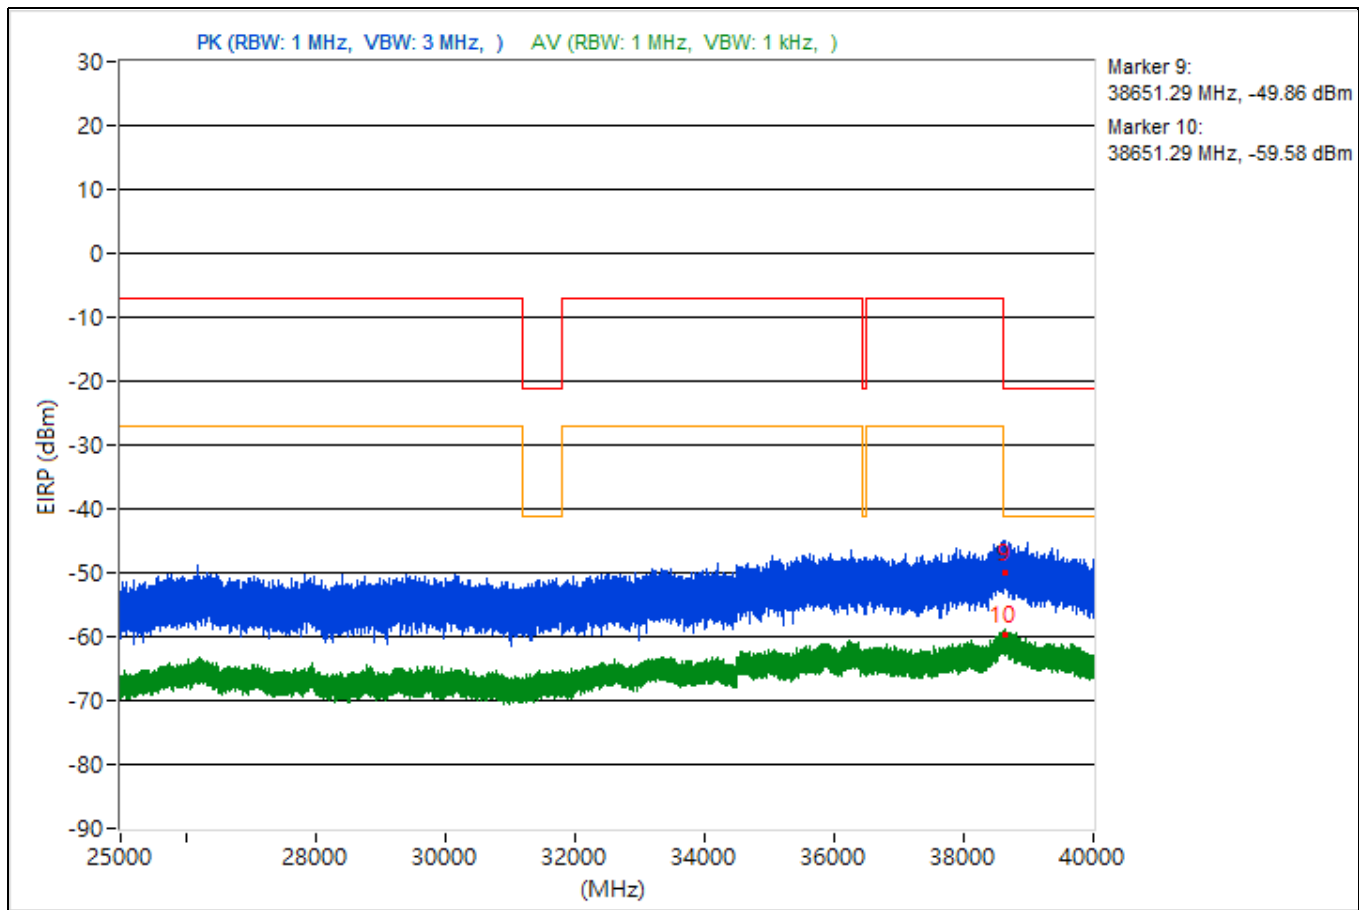


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.19	50.12 PK	74	-23.88	-53.31	-52.85	4.92	-45.14
2	3796.19	39.17 AV	54	-14.83	-64.66	-63.46	4.92	-56.09
3	14472.44	46.93 PK	74	-27.07	-55.89	-56.68	4.92	-48.33
4	14472.44	37.99 AV	54	-16.01	-64.55	-65.97	4.92	-57.27
5	19210.4	50.06 PK	74	-23.94	-55.56	-51.58	4.92	-45.2
6	19210.4	38.92 AV	54	-15.08	-65.48	-63.33	4.92	-56.34
7	23819.1	50.65 PK	74	-23.35	-52.91	-52.21	4.92	-44.61
8	23819.1	39.96 AV	54	-14.04	-62.47	-64.17	4.92	-55.3
9	38625.96	46.5 PK	74	-27.5	-55.61	-58.15	4.92	-48.76
10	38625.96	36.1 AV	54	-17.9	-69.39	-65.6	4.92	-59.16

Note: Margin value = Emission Level - Limit value

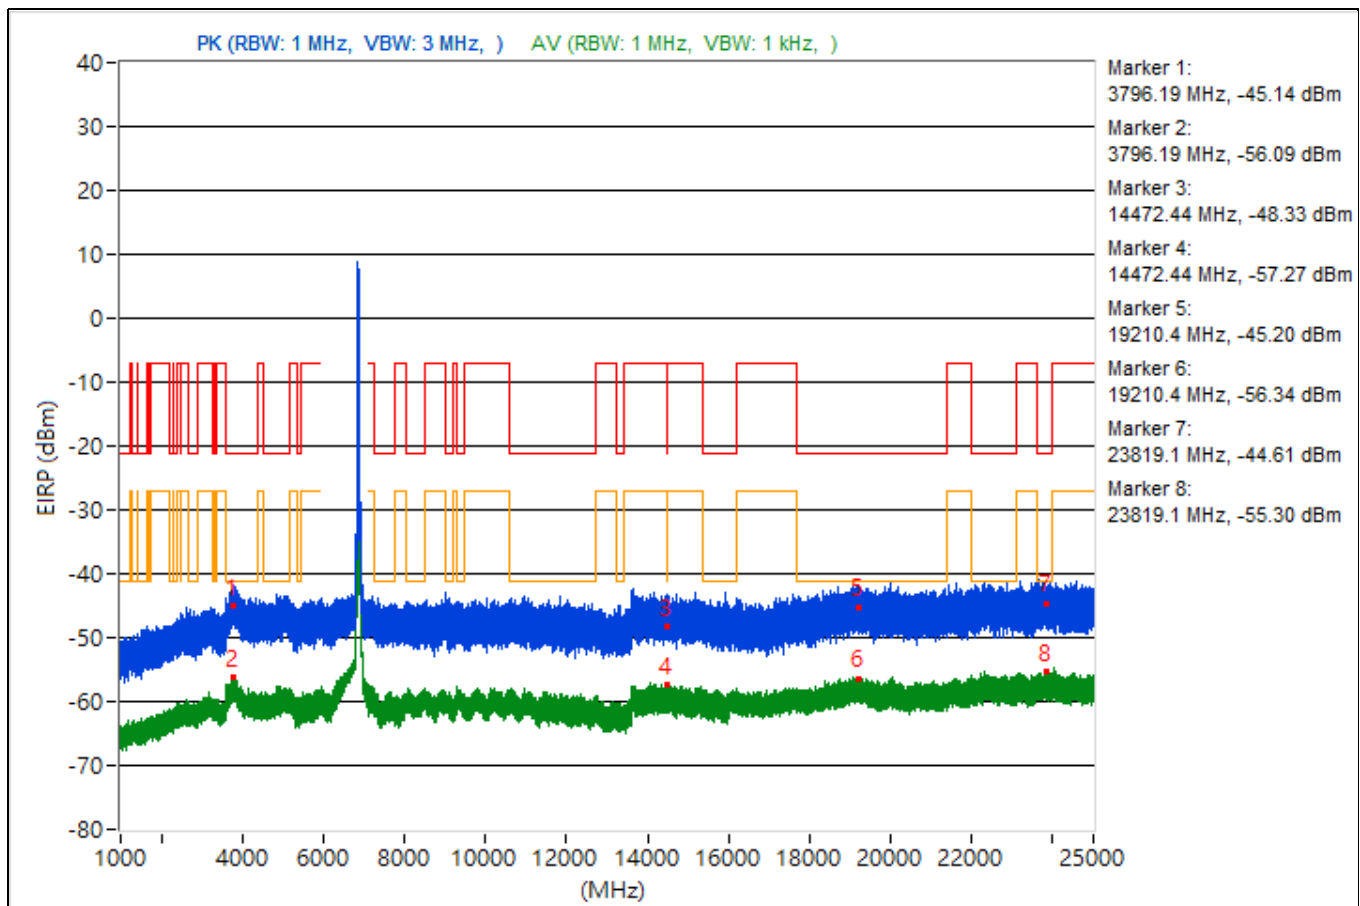


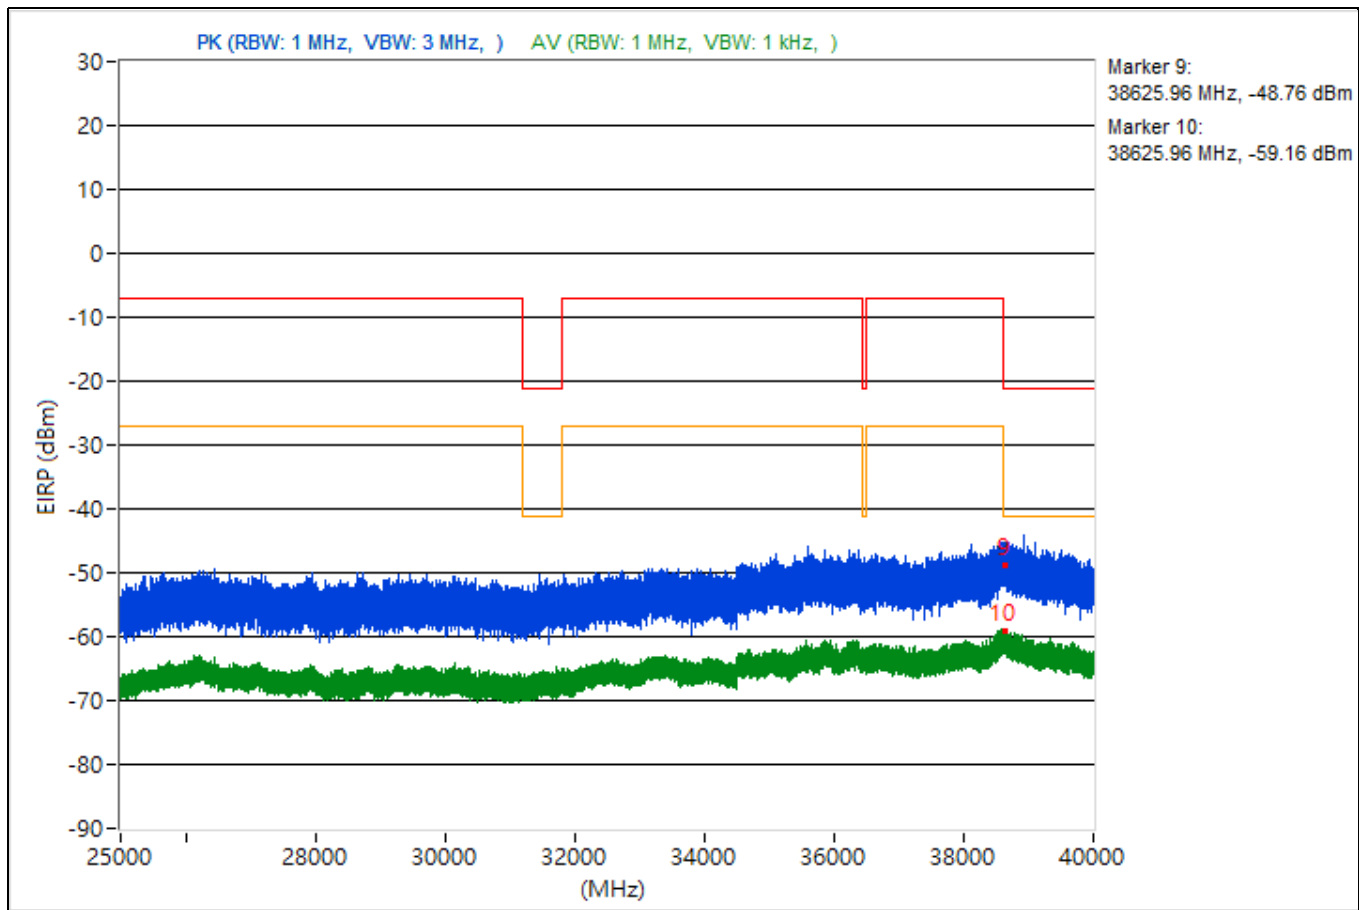


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.89	50.63 PK	74	-23.37	-52.04	-53.14	4.92	-44.63
2	3796.89	38.93 AV	54	-15.07	-64.84	-63.76	4.92	-56.33
3	9399.73	46.28 PK	74	-27.72	-58.74	-55.63	4.92	-48.98
4	9399.73	37.18 AV	54	-16.82	-67.5	-64.91	4.92	-58.08
5	19266.2	49.65 PK	74	-24.35	-53.19	-53.92	4.92	-45.61
6	19266.2	39.11 AV	54	-14.89	-63.05	-65.44	4.92	-56.15
7	23676.8	48.28 PK	74	-25.72	-58.37	-53.02	4.92	-46.98
8	23676.8	39.32 AV	54	-14.68	-66.18	-62.37	4.92	-55.94
9	38610.58	47.32 PK	74	-26.68	-57.14	-54.89	4.92	-47.94
10	38610.58	36.39 AV	54	-17.61	-65.48	-68.7	4.92	-58.87

Note: Margin value = Emission Level - Limit value

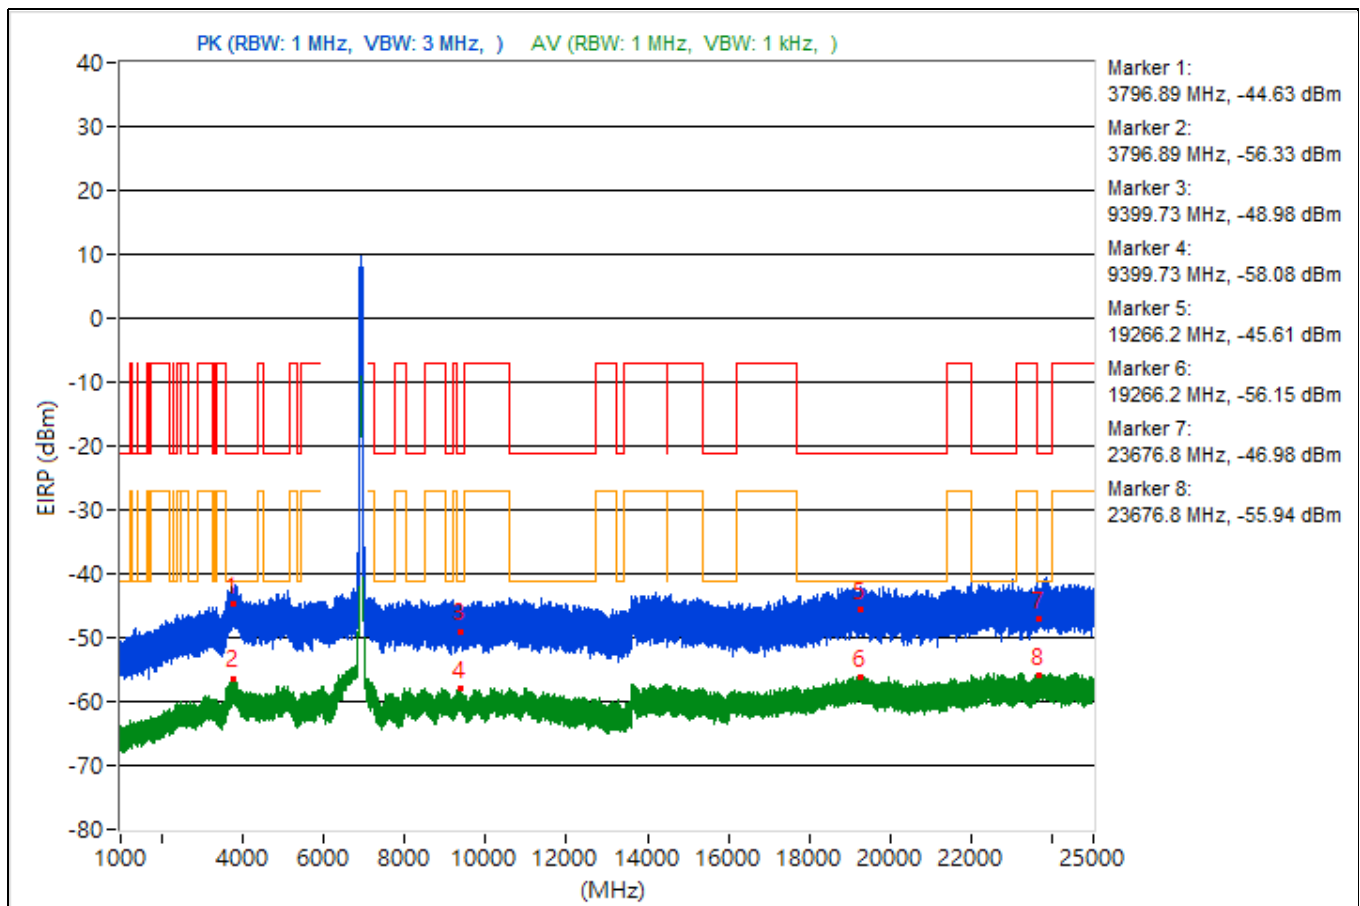


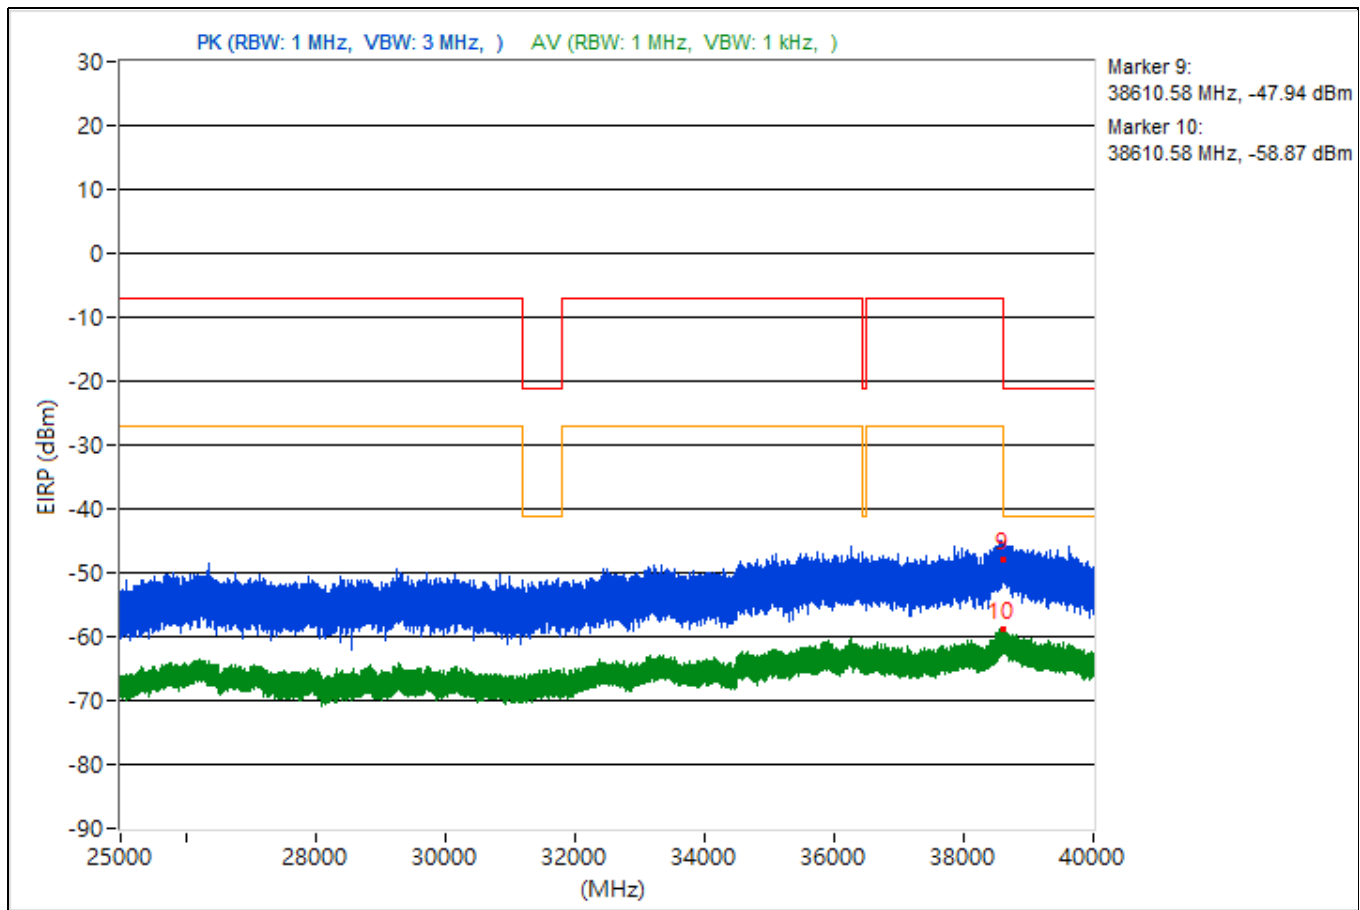


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.22	50.98 PK	74	-23.02	-52.25	-52.17	4.92	-44.28
2	3757.22	38.57 AV	54	-15.43	-66.1	-63.53	4.92	-56.69
3	14478.67	49.33 PK	74	-24.67	-52.18	-56.65	4.92	-45.93
4	14478.67	38.34 AV	54	-15.66	-63.81	-66.23	4.92	-56.92
5	19312.6	50.83 PK	74	-23.17	-50.82	-54.76	4.92	-44.43
6	19312.6	38.88 AV	54	-15.12	-62.94	-66.32	4.92	-56.38
7	23805	49.3 PK	74	-24.7	-53.28	-54.59	4.92	-45.96
8	23805	39.63 AV	54	-14.37	-62.19	-65.56	4.92	-55.63
9	38629.42	46.04 PK	74	-27.96	-57.24	-57.05	4.92	-49.22
10	38629.42	36.05 AV	54	-17.95	-65.75	-69.2	4.92	-59.21

Note: Margin value = Emission Level - Limit value

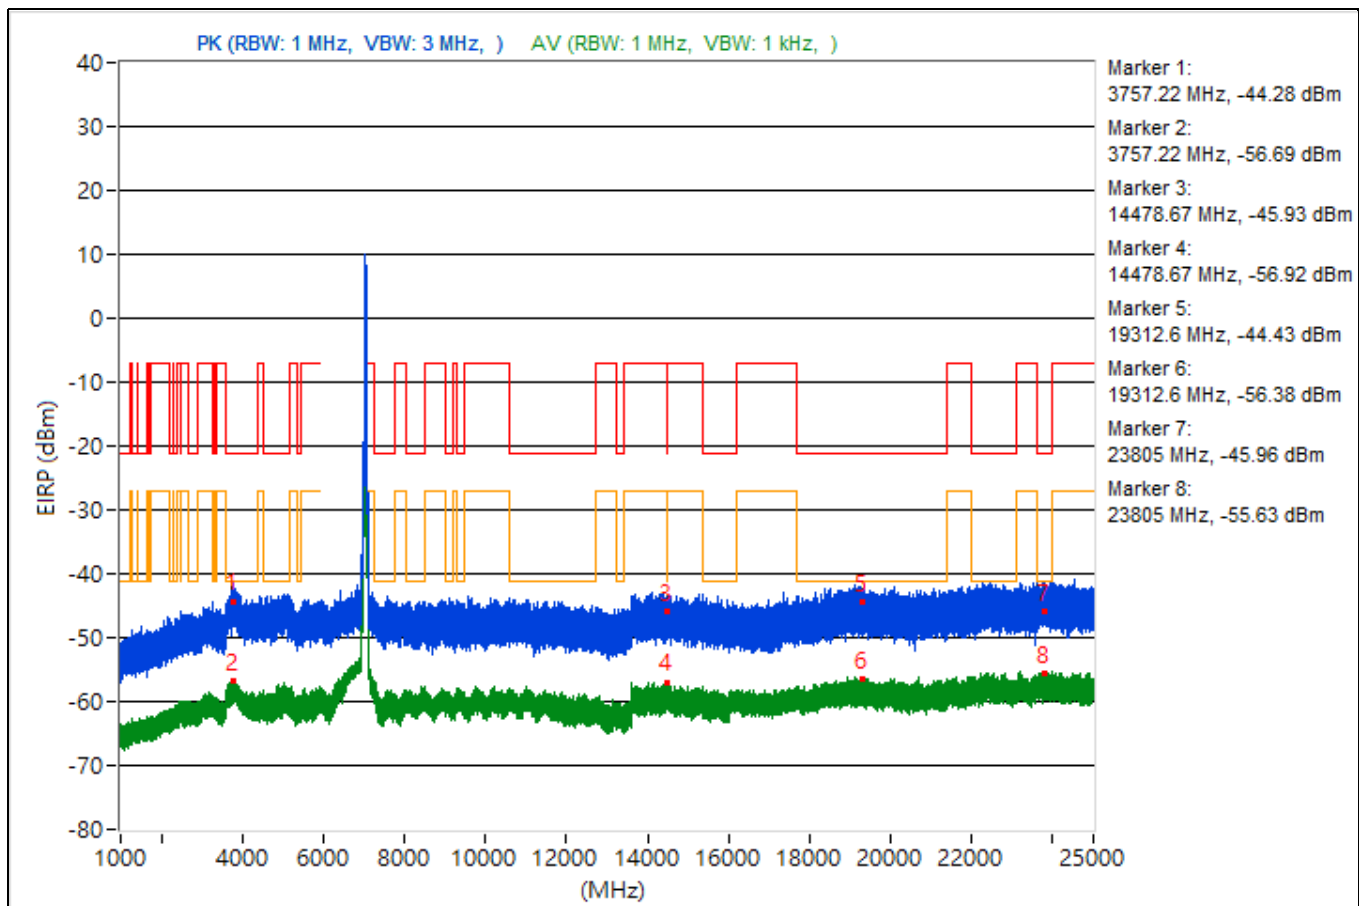


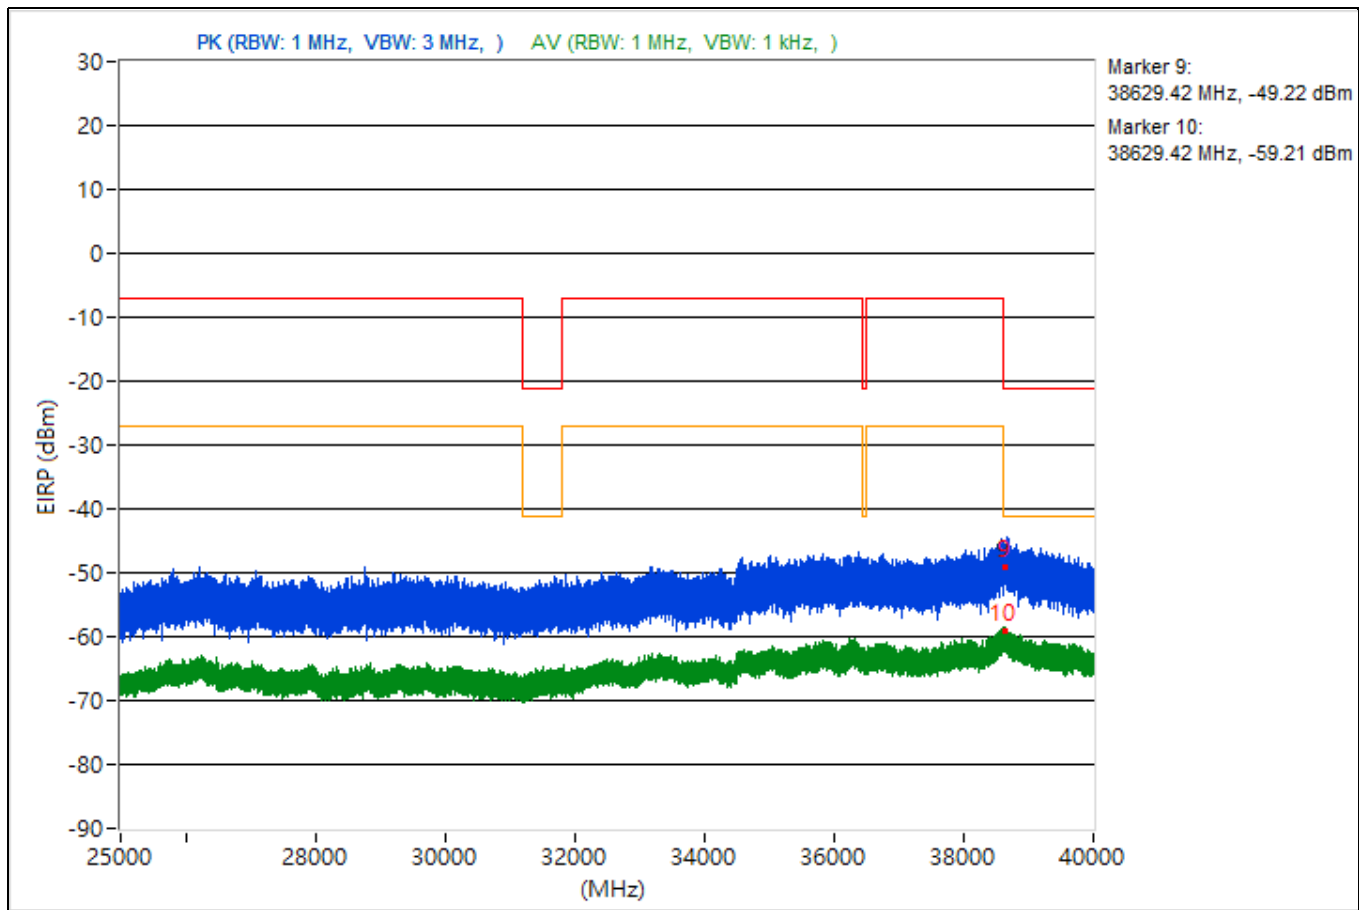


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.98	49.07 PK	74	-24.93	-54.87	-53.47	4.92	-46.19
2	3797.98	38.41 AV	54	-15.59	-63.28	-67.09	4.92	-56.85
3	14486.84	46.72 PK	74	-27.28	-57.76	-55.48	4.92	-48.54
4	14486.84	38.04 AV	54	-15.96	-65.49	-64.83	4.92	-57.22
5	19175.3	48.98 PK	74	-25.02	-54.98	-53.56	4.92	-46.28
6	19175.3	38.67 AV	54	-15.33	-66.11	-63.36	4.92	-56.59
7	23693.1	49.79 PK	74	-24.21	-55.11	-52.17	4.92	-45.47
8	23693.1	39.82 AV	54	-14.18	-65.09	-62.14	4.92	-55.44
9	38621.07	47.44 PK	74	-26.56	-56.21	-55.34	4.92	-47.82
10	38621.07	36.64 AV	54	-17.36	-67.11	-66.05	4.92	-58.62

Note: Margin value = Emission Level - Limit value

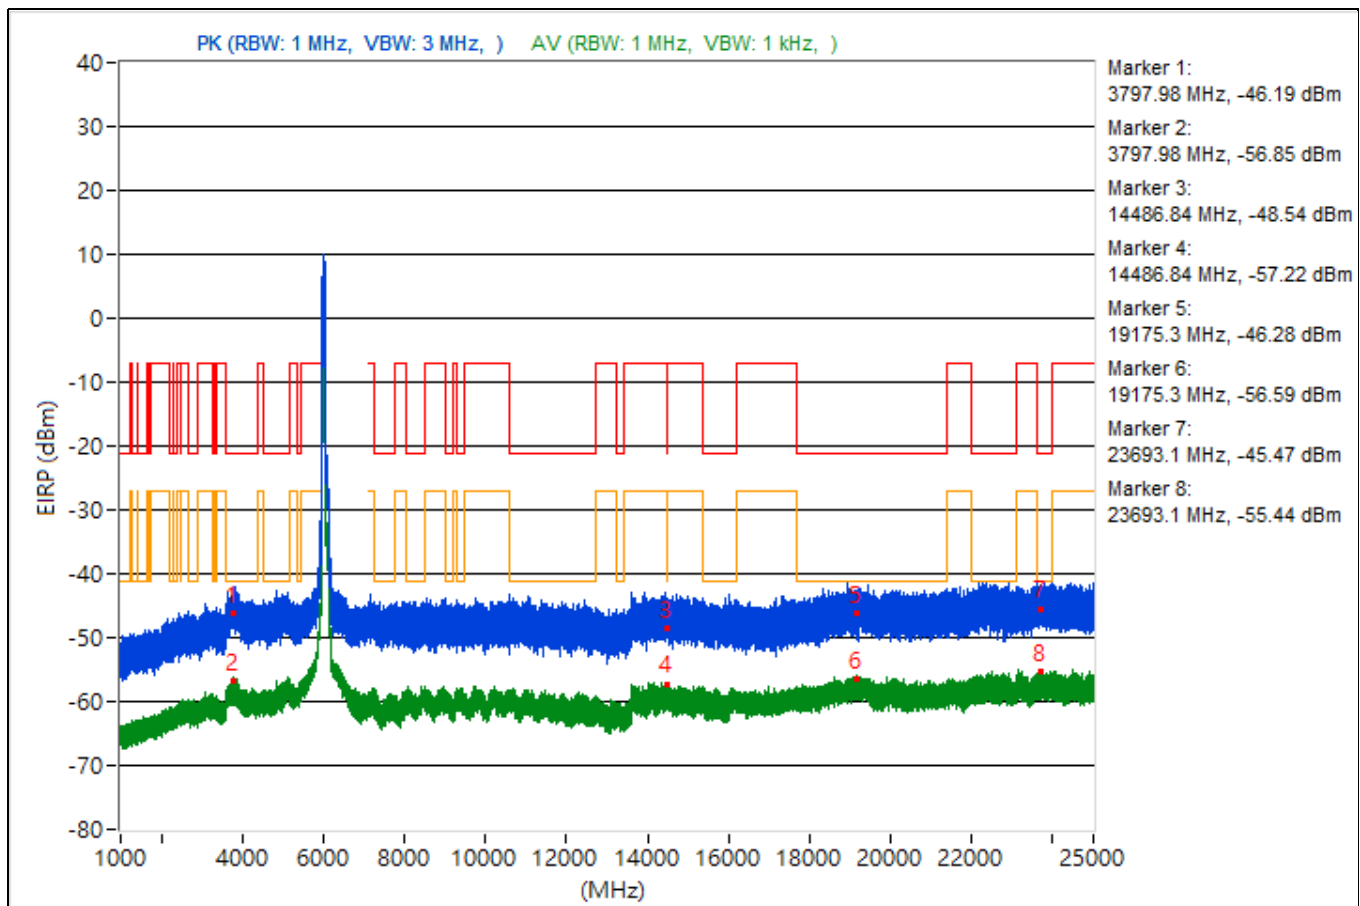


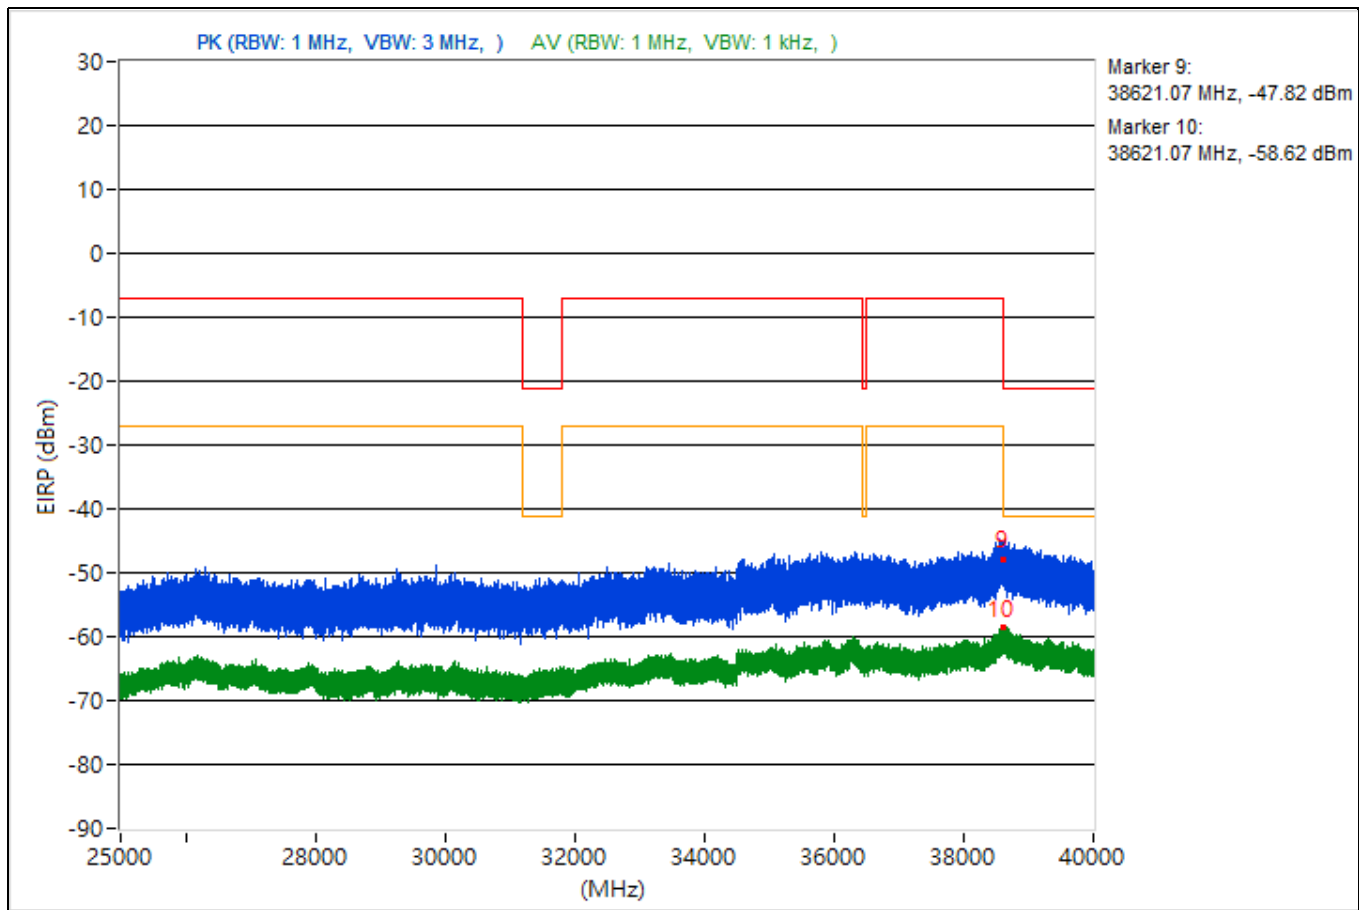


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.48	50.85 PK	74	-23.15	-52.33	-52.36	4.92	-44.41
2	3801.48	38.11 AV	54	-15.89	-67.83	-63.42	4.92	-57.15
3	14489.33	49.43 PK	74	-24.57	-54.57	-53.08	4.92	-45.83
4	14489.33	37.56 AV	54	-16.44	-64.56	-67.04	4.92	-57.7
5	19393.8	50.51 PK	74	-23.49	-52.3	-53.09	4.92	-44.75
6	19393.8	39.14 AV	54	-14.86	-65.08	-63.22	4.92	-56.12
7	23691.6	49.51 PK	74	-24.49	-53.98	-53.41	4.92	-45.75
8	23691.6	40.03 AV	54	-13.97	-62.1	-64.56	4.92	-55.23
9	38632.89	48.35 PK	74	-25.65	-53.14	-57.66	4.92	-46.91
10	38632.89	36.55 AV	54	-17.45	-65.91	-67.53	4.92	-58.71

Note: Margin value = Emission Level - Limit value

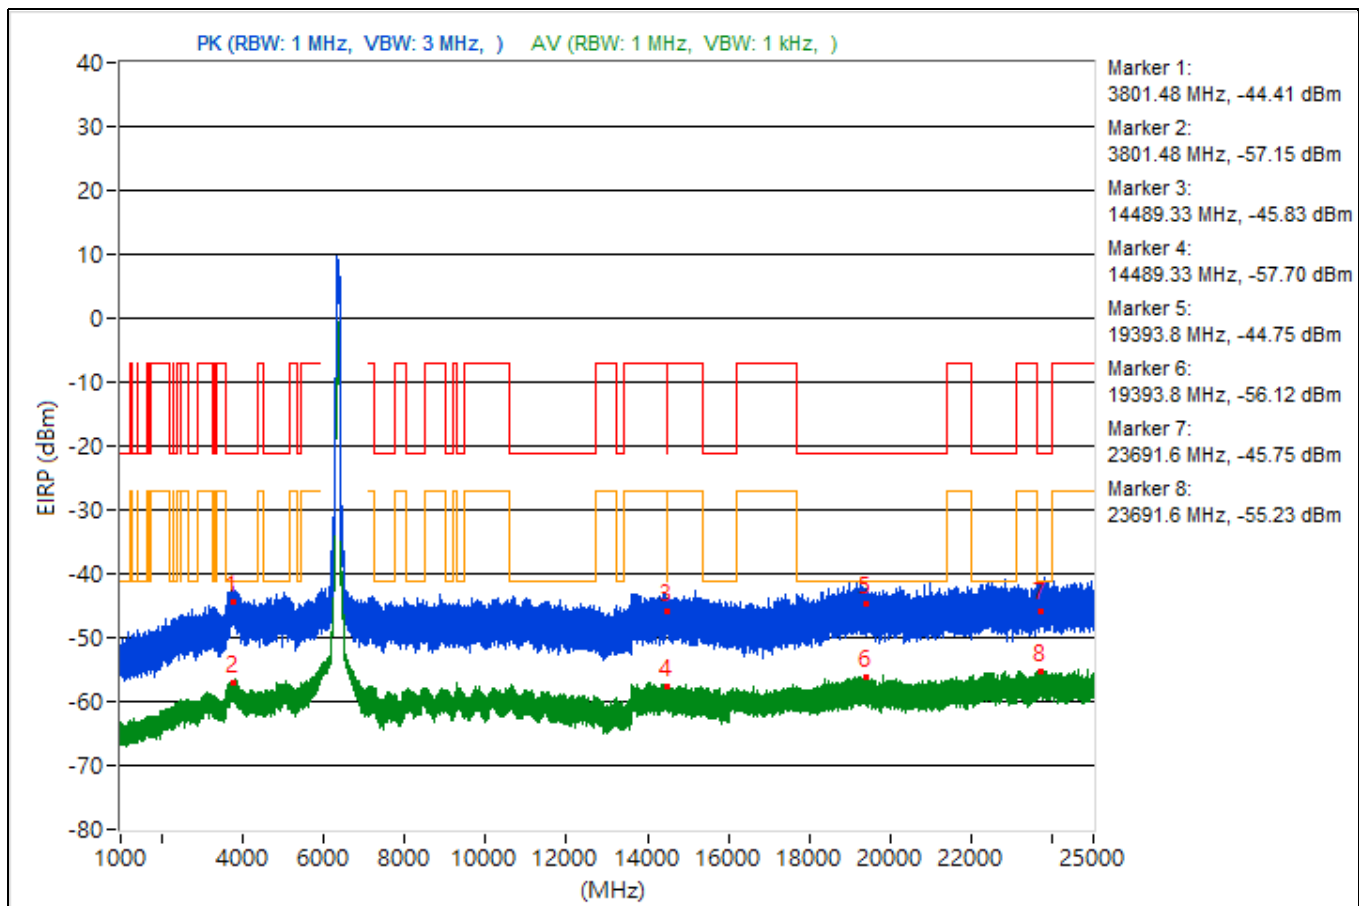


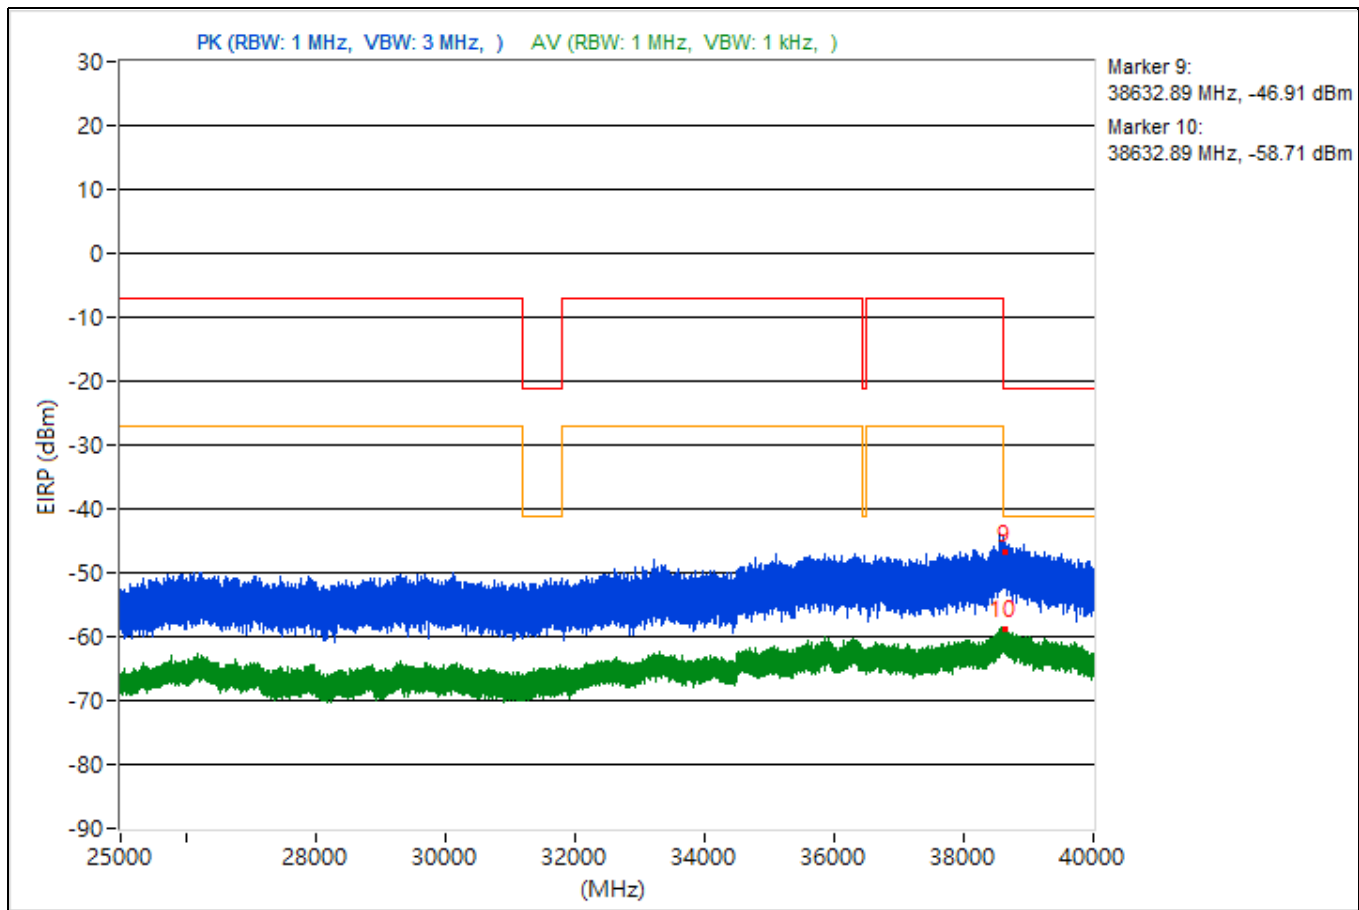


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.29	50.03 PK	74	-23.97	-52.59	-53.82	4.92	-45.23
2	3756.29	39.41 AV	54	-14.59	-63.07	-64.63	4.92	-55.85
3	14473.07	47.79 PK	74	-26.21	-57.35	-54.05	4.92	-47.47
4	14473.07	37.4 AV	54	-16.6	-64.88	-66.94	4.92	-57.86
5	19215.3	50.69 PK	74	-23.31	-51.49	-53.82	4.92	-44.57
6	19215.3	38.82 AV	54	-15.18	-65.98	-63.19	4.92	-56.44
7	22406.5	47.61 PK	74	-26.39	-55.82	-55.35	4.92	-47.65
8	22406.5	40.26 AV	54	-13.74	-62.11	-63.94	4.92	-55.00
9	38620.98	46.49 PK	74	-27.51	-56.36	-57.06	4.92	-48.77
10	38620.98	36.51 AV	54	-17.49	-65.84	-67.73	4.92	-58.75

Note: Margin value = Emission Level - Limit value

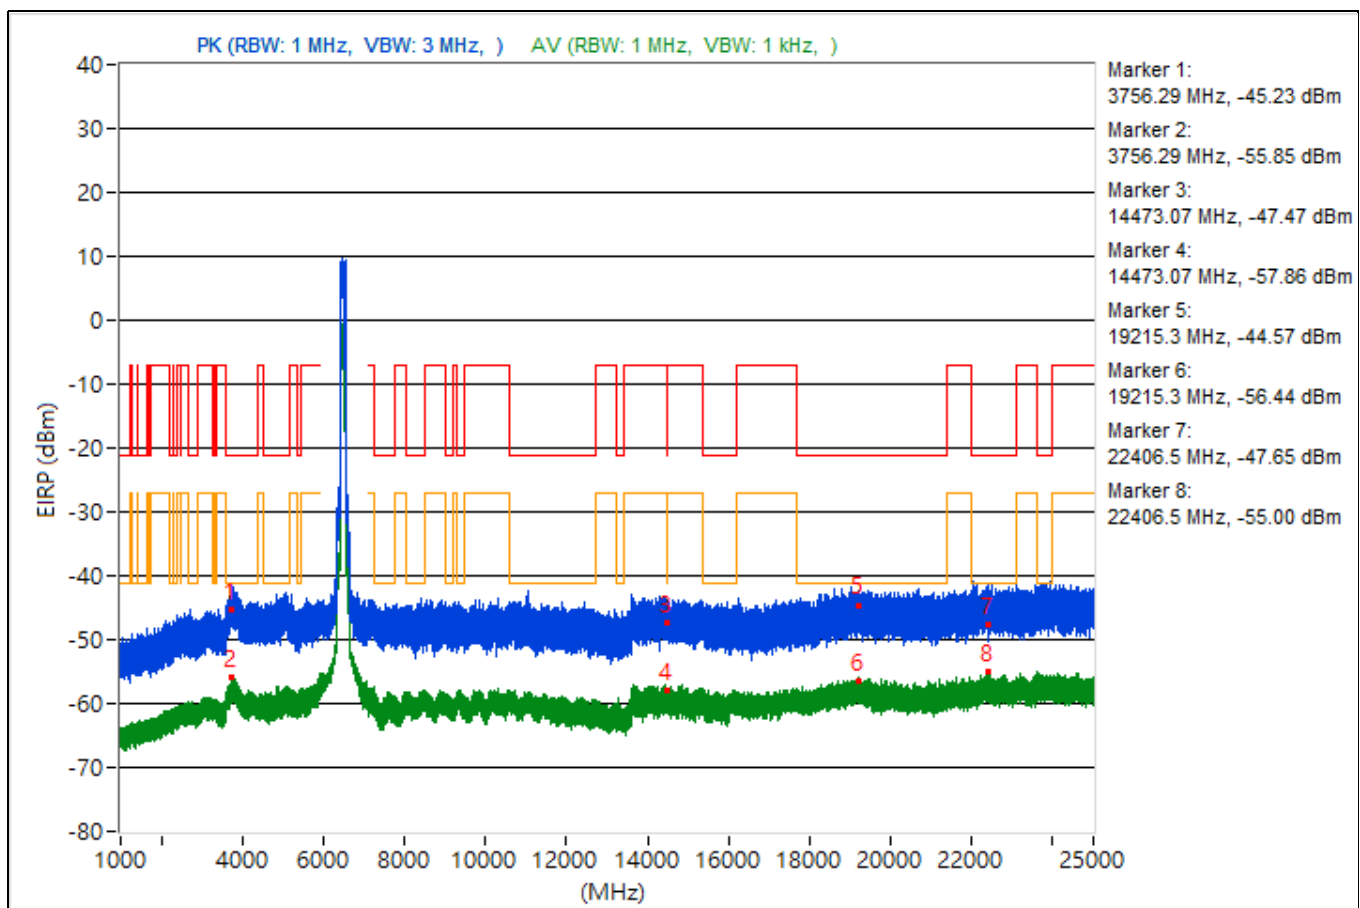


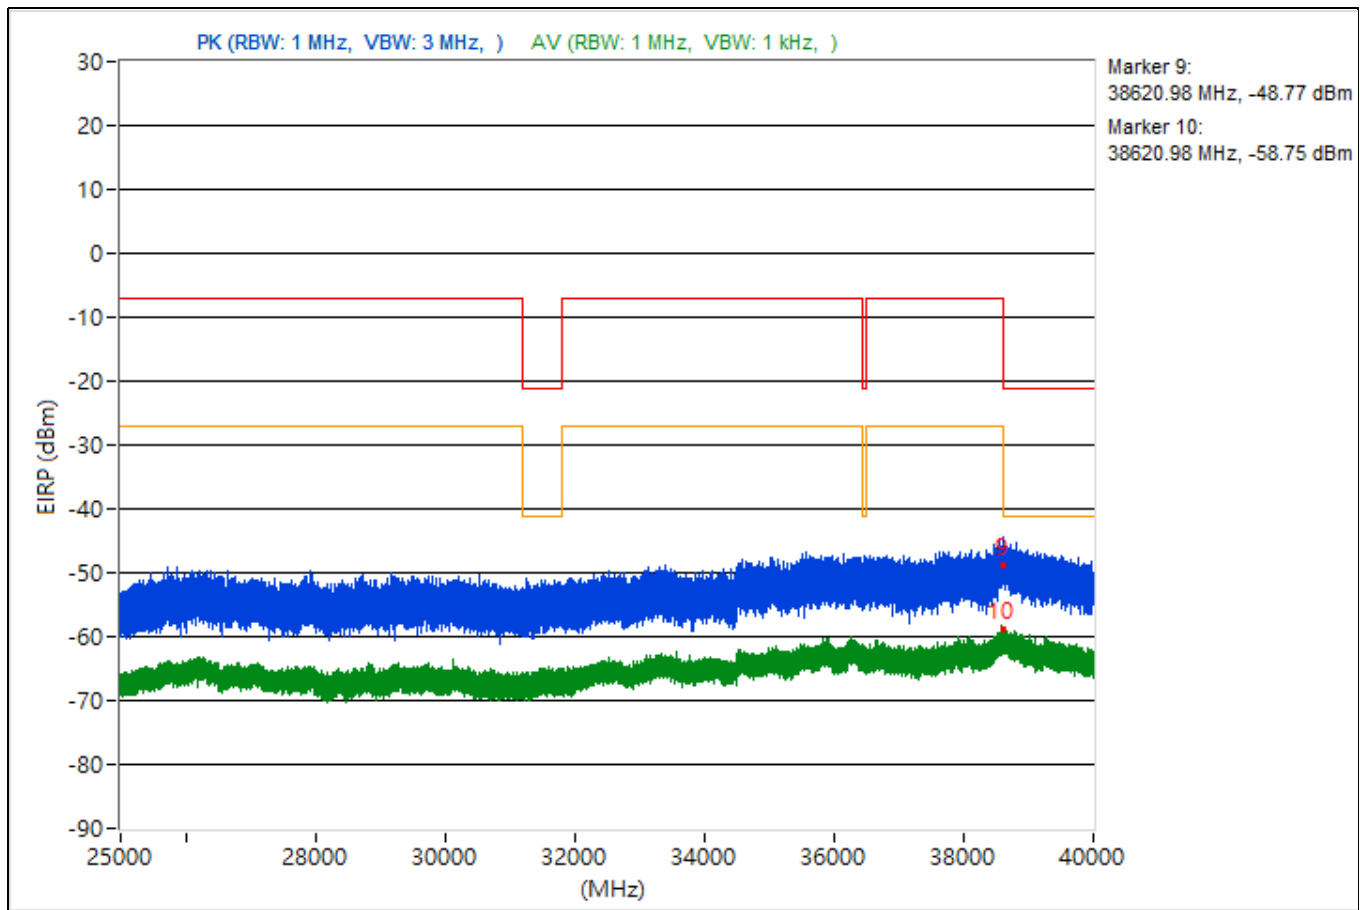


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3745.79	50.13 PK	74	-23.87	-54.23	-52.14	4.92	-45.13
2	3745.79	38.75 AV	54	-15.25	-65.36	-63.68	4.92	-56.51
3	14483.29	49.09 PK	74	-24.91	-54.29	-53.92	4.92	-46.17
4	14483.29	37.84 AV	54	-16.16	-64.64	-66.2	4.92	-57.42
5	19139.9	49.07 PK	74	-24.93	-53.63	-54.68	4.92	-46.19
6	19139.9	39 AV	54	-15	-66.45	-62.71	4.92	-56.26
7	22348	49.83 PK	74	-24.17	-53.31	-53.41	4.92	-45.43
8	22348	40.59 AV	54	-13.41	-63.5	-61.86	4.92	-54.67
9	38615.64	46.19 PK	74	-27.81	-56.98	-57.03	4.92	-49.07
10	38615.64	36.69 AV	54	-17.31	-66.02	-67.06	4.92	-58.57

Note: Margin value = Emission Level - Limit value

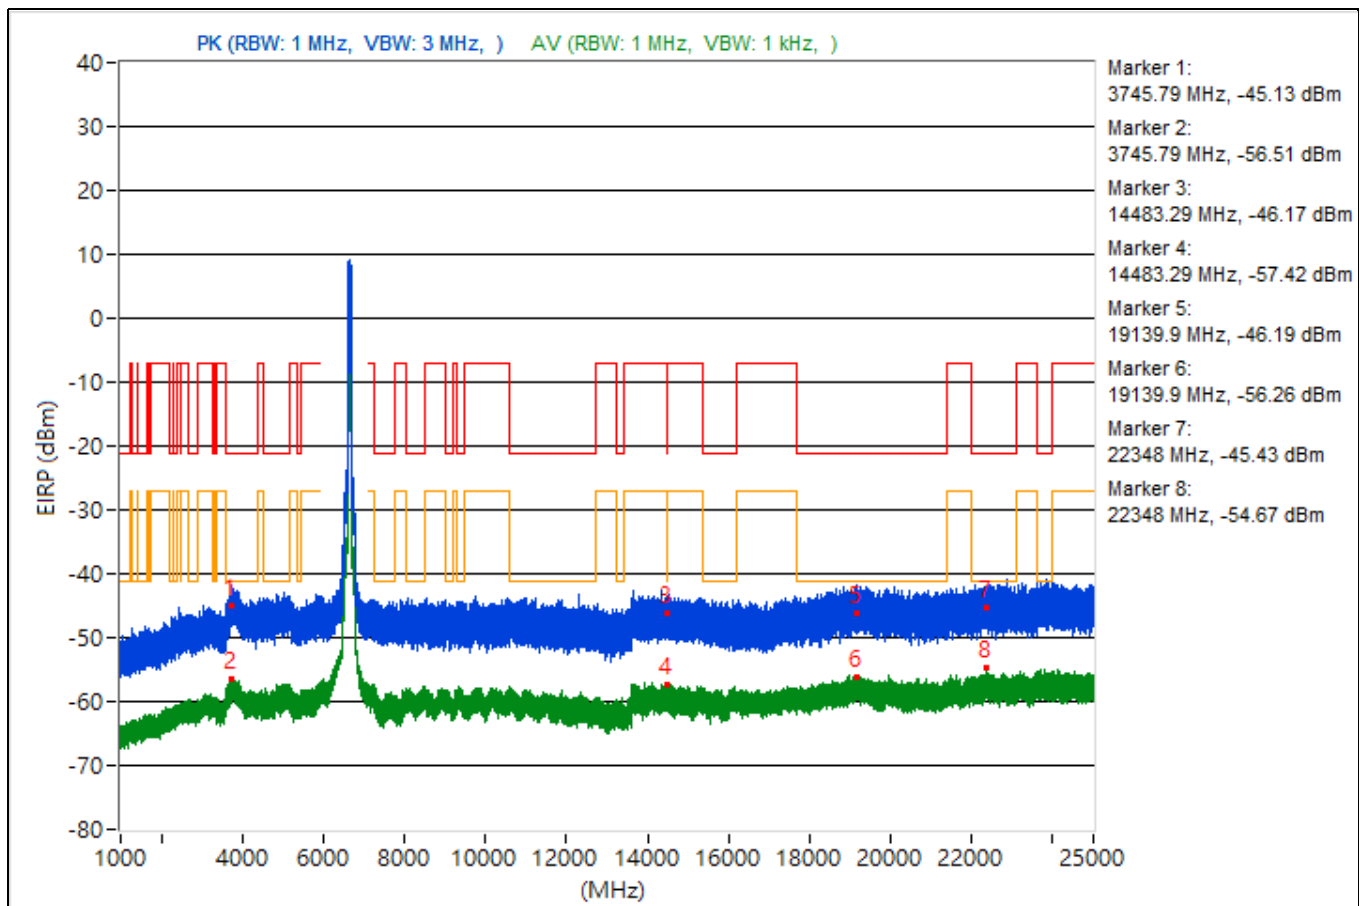


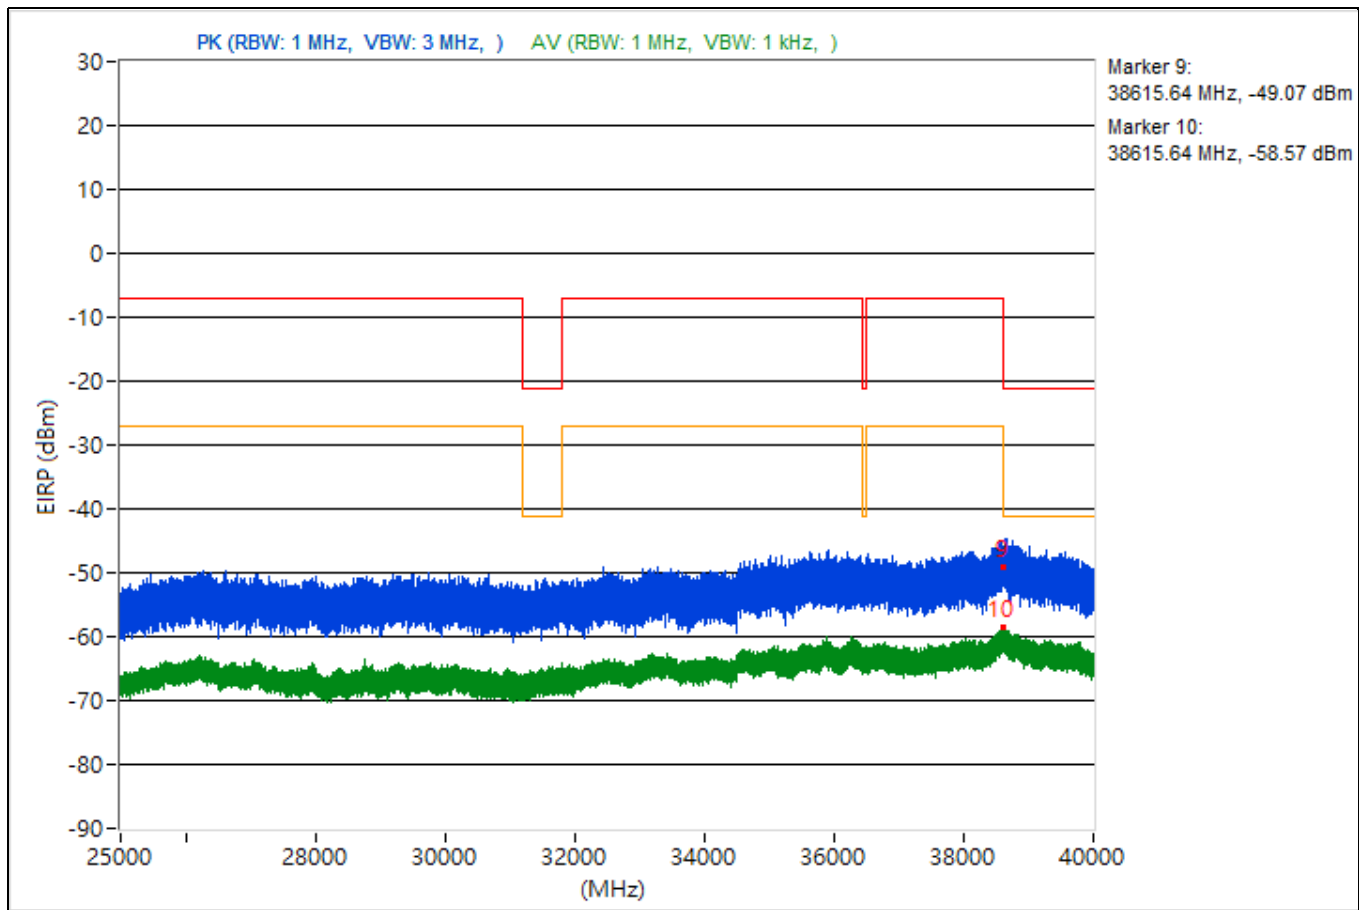


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.36	49.68 PK	74	-24.32	-52.61	-54.64	4.92	-45.58
2	3818.36	39.06 AV	54	-14.94	-65.03	-63.39	4.92	-56.2
3	7267.72	48.36 PK	74	-25.64	-54.6	-55.07	4.92	-46.9
4	7267.72	38.43 AV	54	-15.57	-65.69	-63.99	4.92	-56.83
5	19100.1	48.93 PK	74	-25.07	-52.99	-56.07	4.92	-46.33
6	19100.1	39.45 AV	54	-14.55	-66.02	-62.25	4.92	-55.81
7	23609.8	47.92 PK	74	-26.08	-56.09	-54.58	4.92	-47.34
8	23609.8	39.57 AV	54	-14.43	-62.41	-65.3	4.92	-55.69
9	38621.6	45.94 PK	74	-28.06	-58.24	-56.44	4.92	-49.32
10	38621.6	36.96 AV	54	-17.04	-66.9	-65.64	4.92	-58.3

Note: Margin value = Emission Level - Limit value

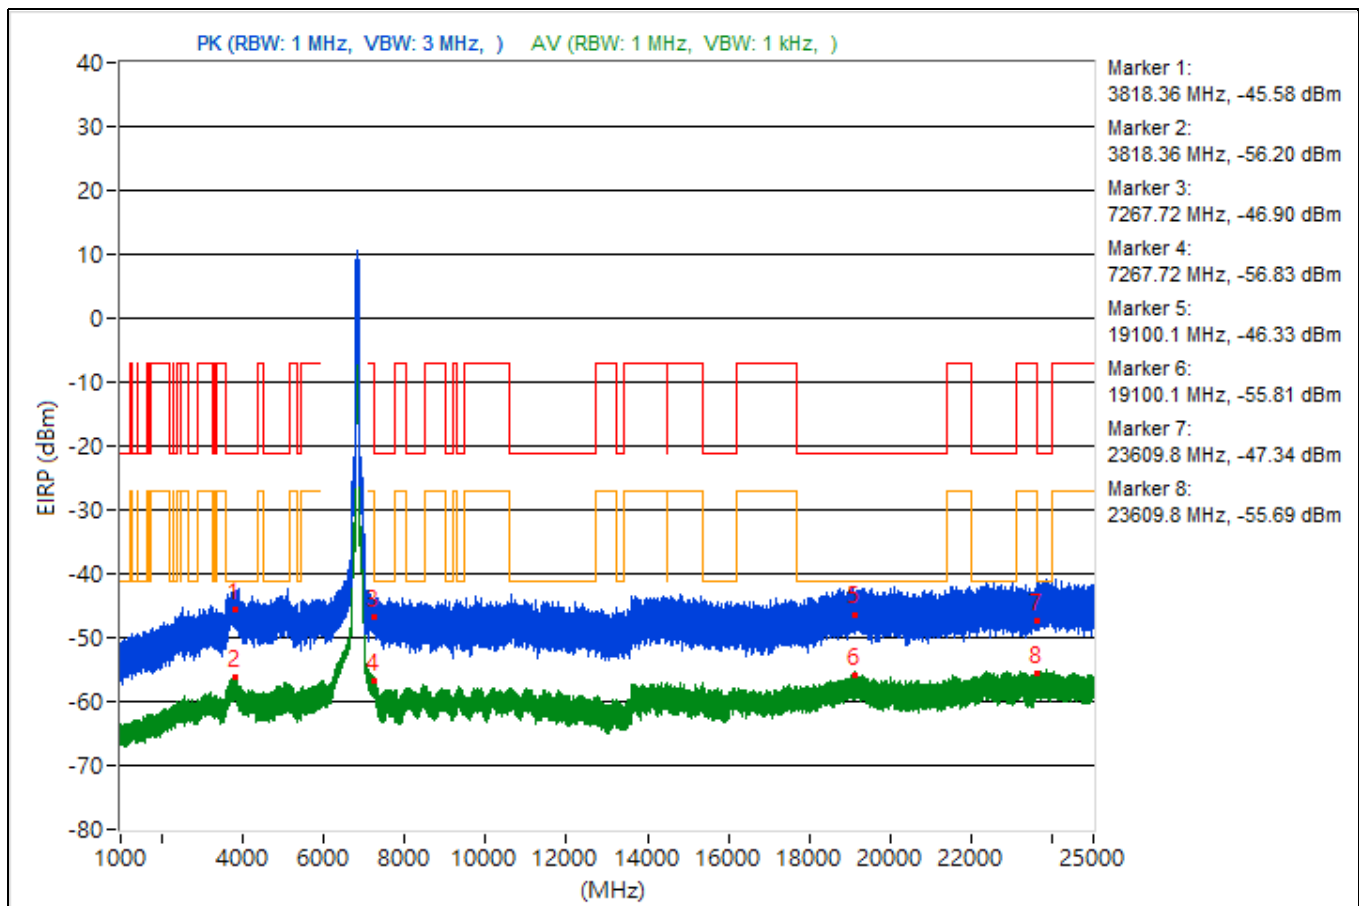


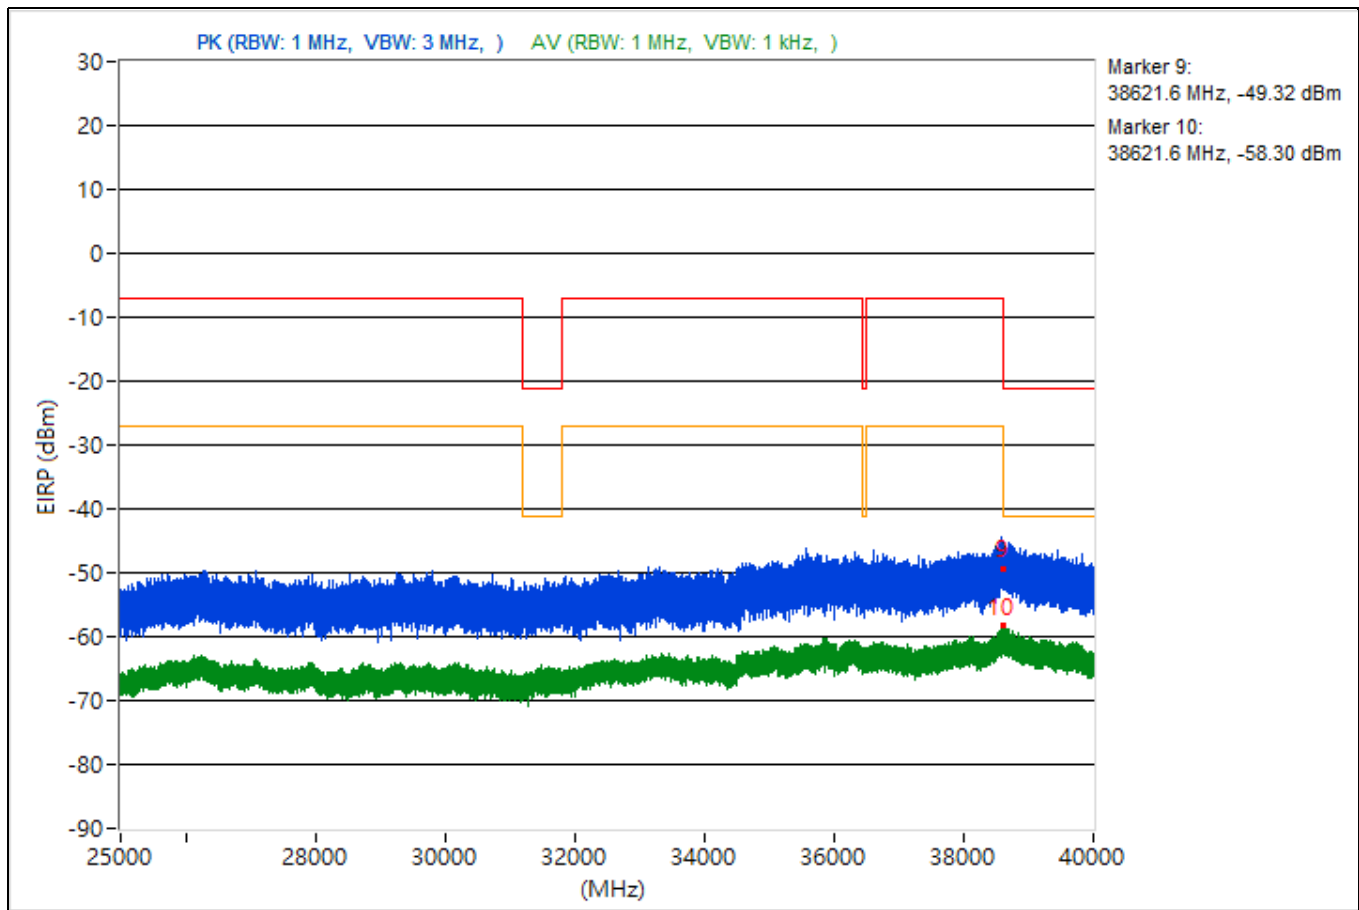


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821	49.77 PK	74	-24.23	-55.2	-52.17	4.92	-45.49
2	3821	38.8 AV	54	-15.2	-66.19	-63.13	4.92	-56.46
3	7252.63	48.5 PK	74	-25.5	-54.53	-54.87	4.92	-46.76
4	7252.63	39.68 AV	54	-14.32	-63.97	-63.09	4.92	-55.58
5	19115.8	47.21 PK	74	-26.79	-55.75	-56.23	4.92	-48.05
6	19115.8	39.5 AV	54	-14.5	-63.19	-64.24	4.92	-55.76
7	23809.9	47.32 PK	74	-26.68	-57.62	-54.62	4.92	-47.94
8	23809.9	39.78 AV	54	-14.22	-65.43	-62.04	4.92	-55.48
9	38609.07	44.26 PK	74	-29.74	-59.46	-58.45	4.92	-51
10	38609.07	36.32 AV	54	-17.68	-68.33	-65.78	4.92	-58.94

Note: Margin value = Emission Level - Limit value

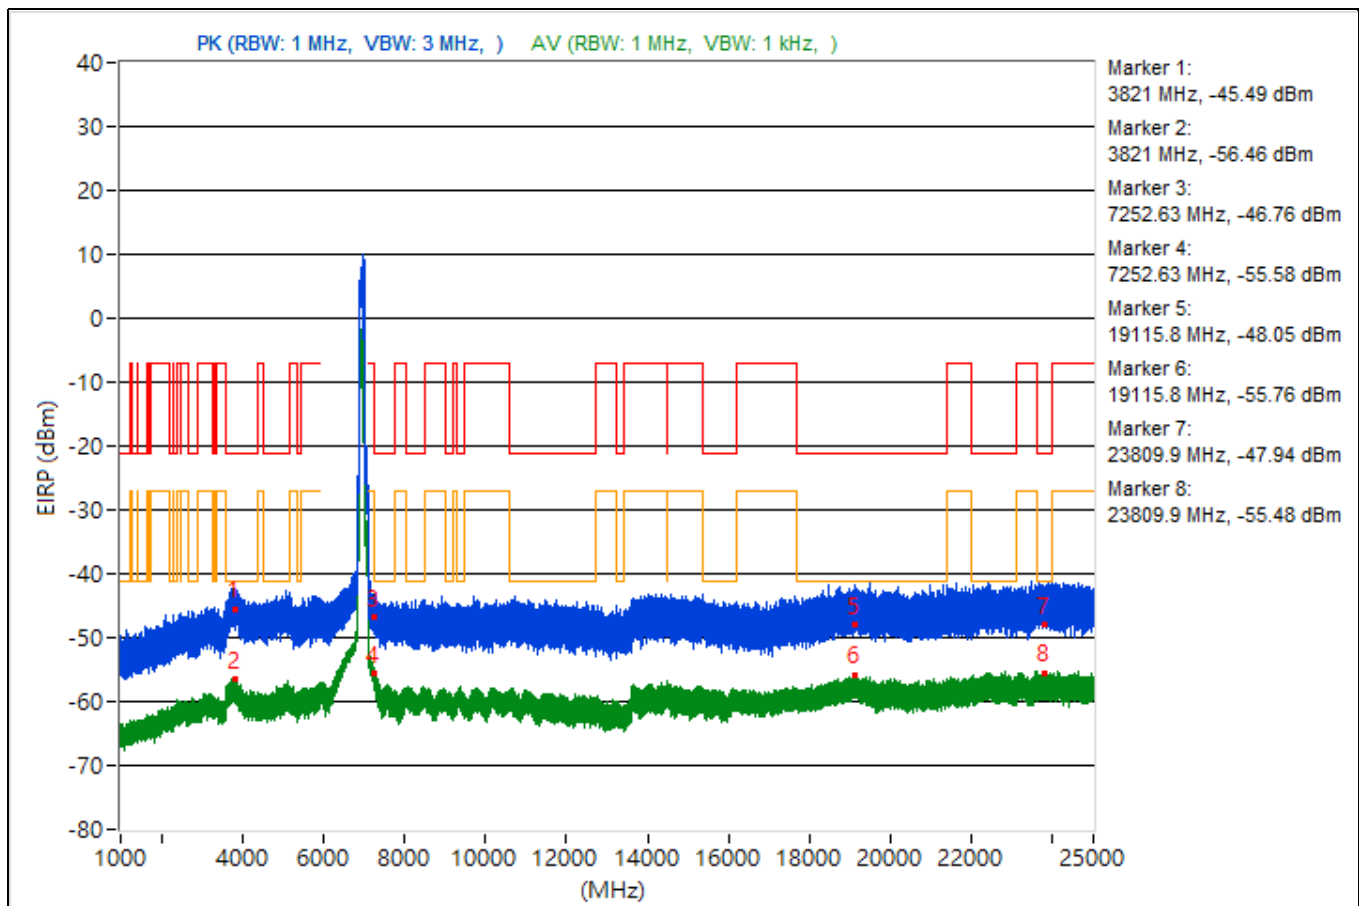


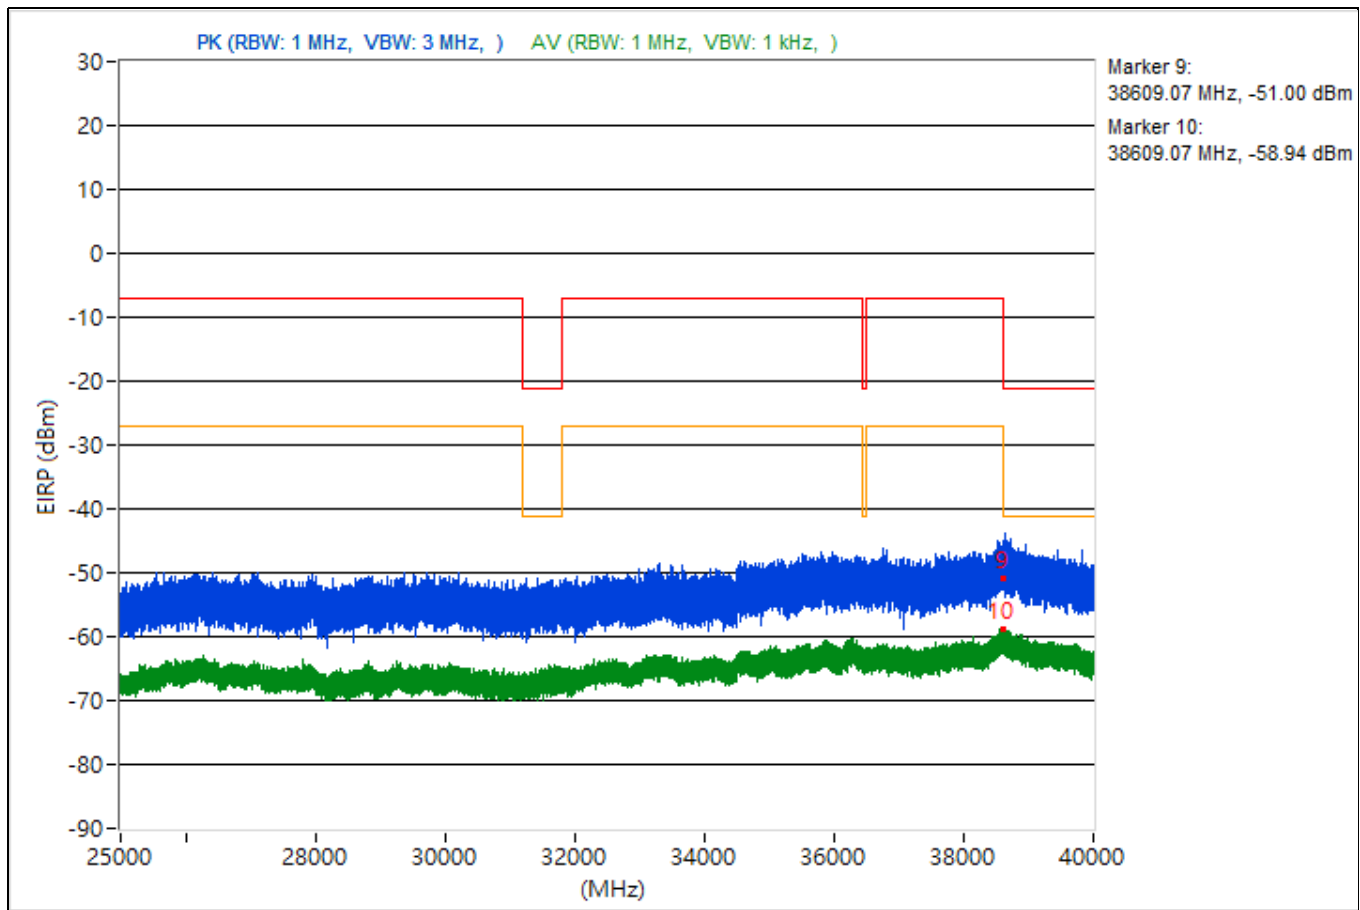


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828	50.15 PK	74	-23.85	-54.31	-52.05	4.92	-45.11
2	3828	38.77 AV	54	-15.23	-66.11	-63.2	4.92	-56.49
3	14497.69	47.57 PK	74	-26.43	-56.08	-55.2	4.92	-47.69
4	14497.69	37.48 AV	54	-16.52	-64.57	-67.27	4.92	-57.78
5	19360.4	49.34 PK	74	-24.66	-54.14	-53.57	4.92	-45.92
6	19360.4	39.34 AV	54	-14.66	-62.8	-65.24	4.92	-55.92
7	22244.5	51.67 PK	74	-22.33	-53.73	-50.06	4.92	-43.59
8	22244.5	39.64 AV	54	-14.36	-65.8	-62.08	4.92	-55.62
9	38626.84	44.52 PK	74	-29.48	-58.72	-58.62	4.92	-50.74
10	38626.84	36.74 AV	54	-17.26	-65.52	-67.64	4.92	-58.52

Note: Margin value = Emission Level - Limit value

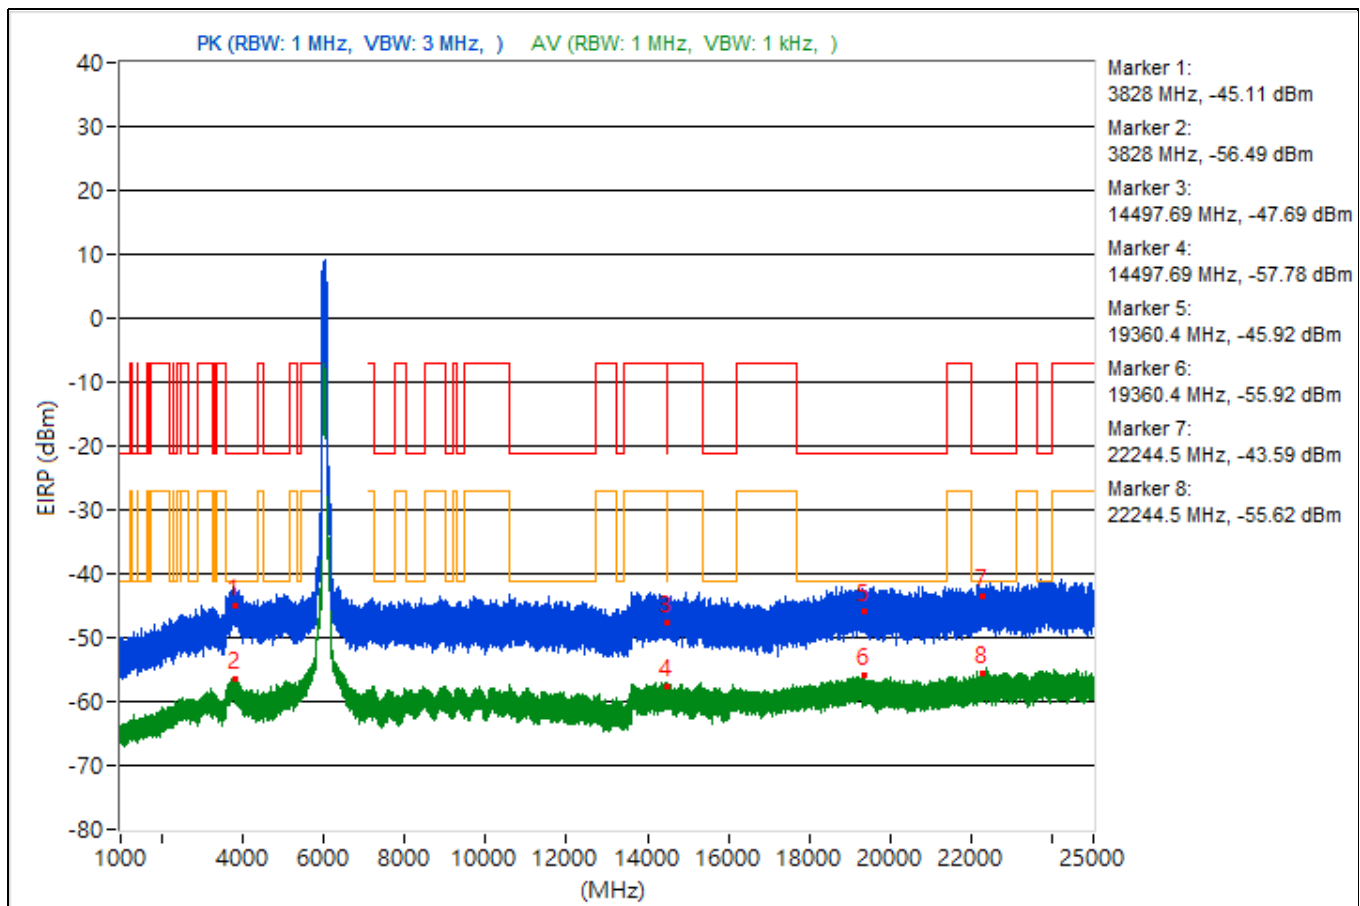


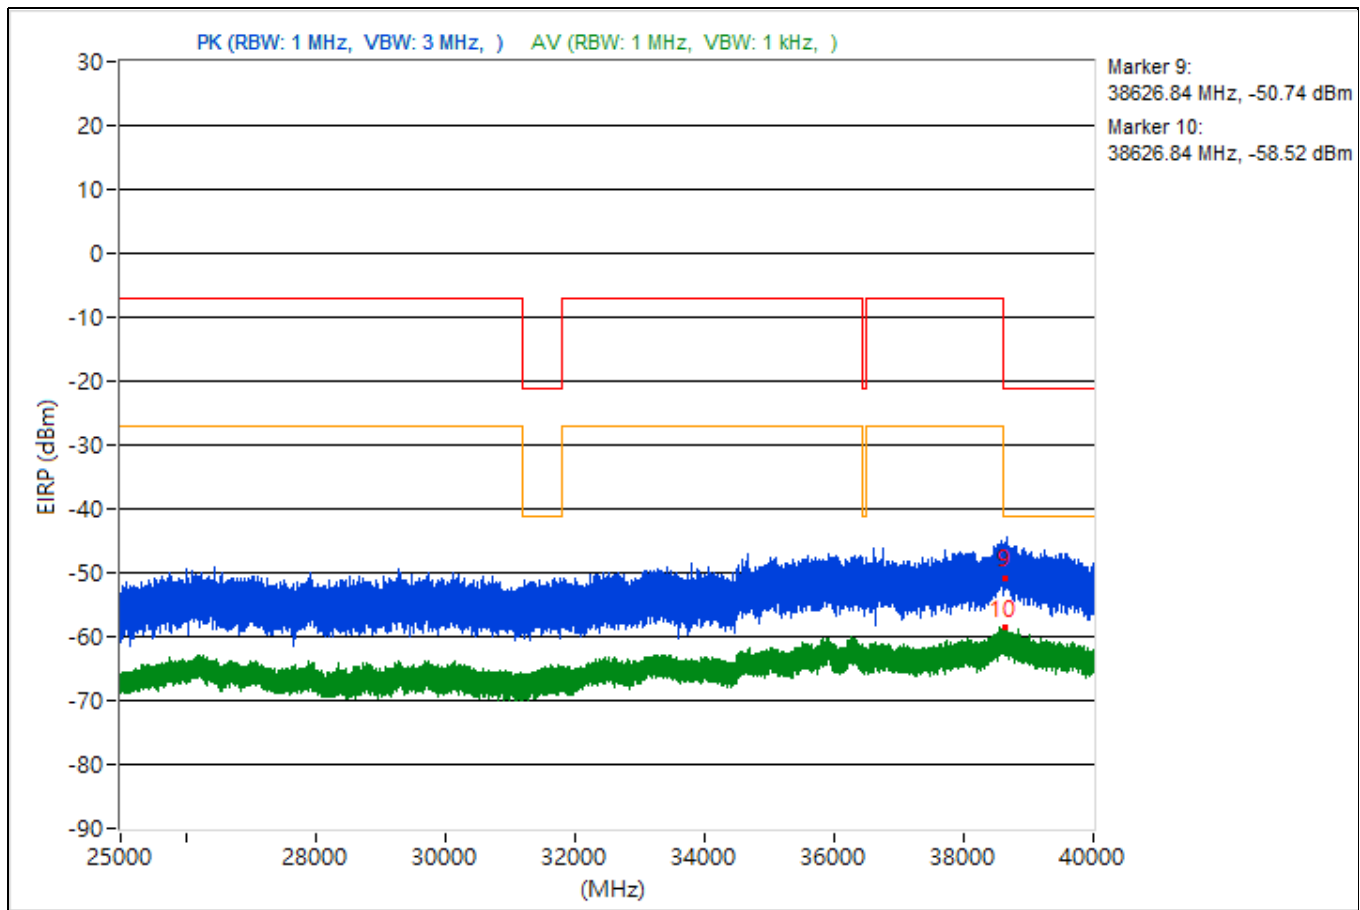


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3826.99	50.42 PK	74	-23.58	-54.76	-51.41	4.92	-44.84
2	3826.99	38.95 AV	54	-15.05	-63.33	-65.39	4.92	-56.31
3	8486.4	46.6 PK	74	-27.4	-57.7	-55.7	4.92	-48.66
4	8486.4	37.51 AV	54	-16.49	-67.61	-64.34	4.92	-57.75
5	19069	49.65 PK	74	-24.35	-54.52	-52.75	4.92	-45.61
6	19069	39.02 AV	54	-14.98	-63.01	-65.76	4.92	-56.24
7	22792.5	49.61 PK	74	-24.39	-52.62	-54.81	4.92	-45.65
8	22792.5	39.81 AV	54	-14.19	-62.07	-65.27	4.92	-55.45
9	38620.53	47.75 PK	74	-26.25	-54.16	-57.26	4.92	-47.51
10	38620.53	36.28 AV	54	-17.72	-68.38	-65.81	4.92	-58.98

Note: Margin value = Emission Level - Limit value

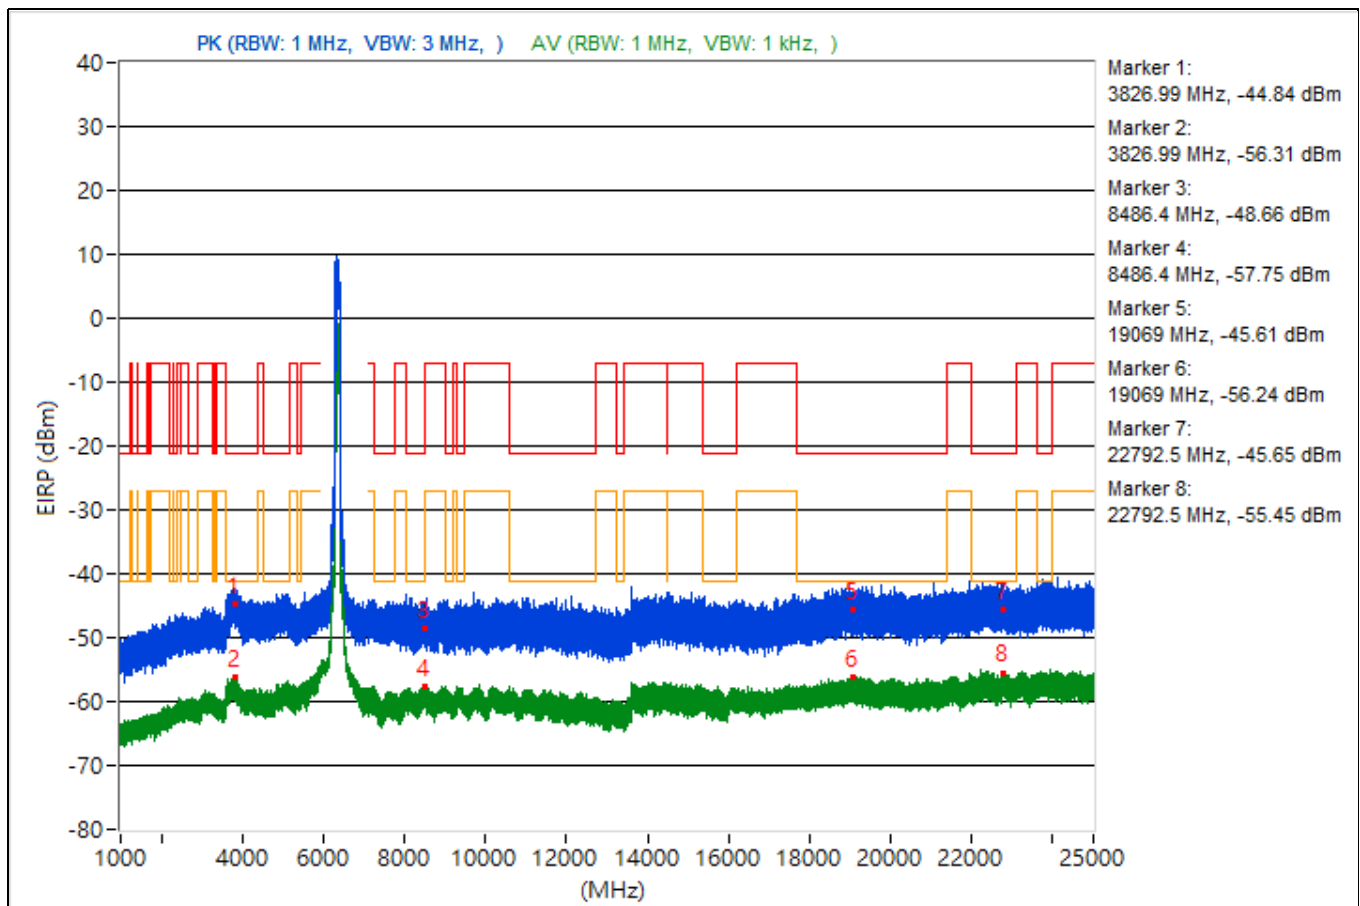


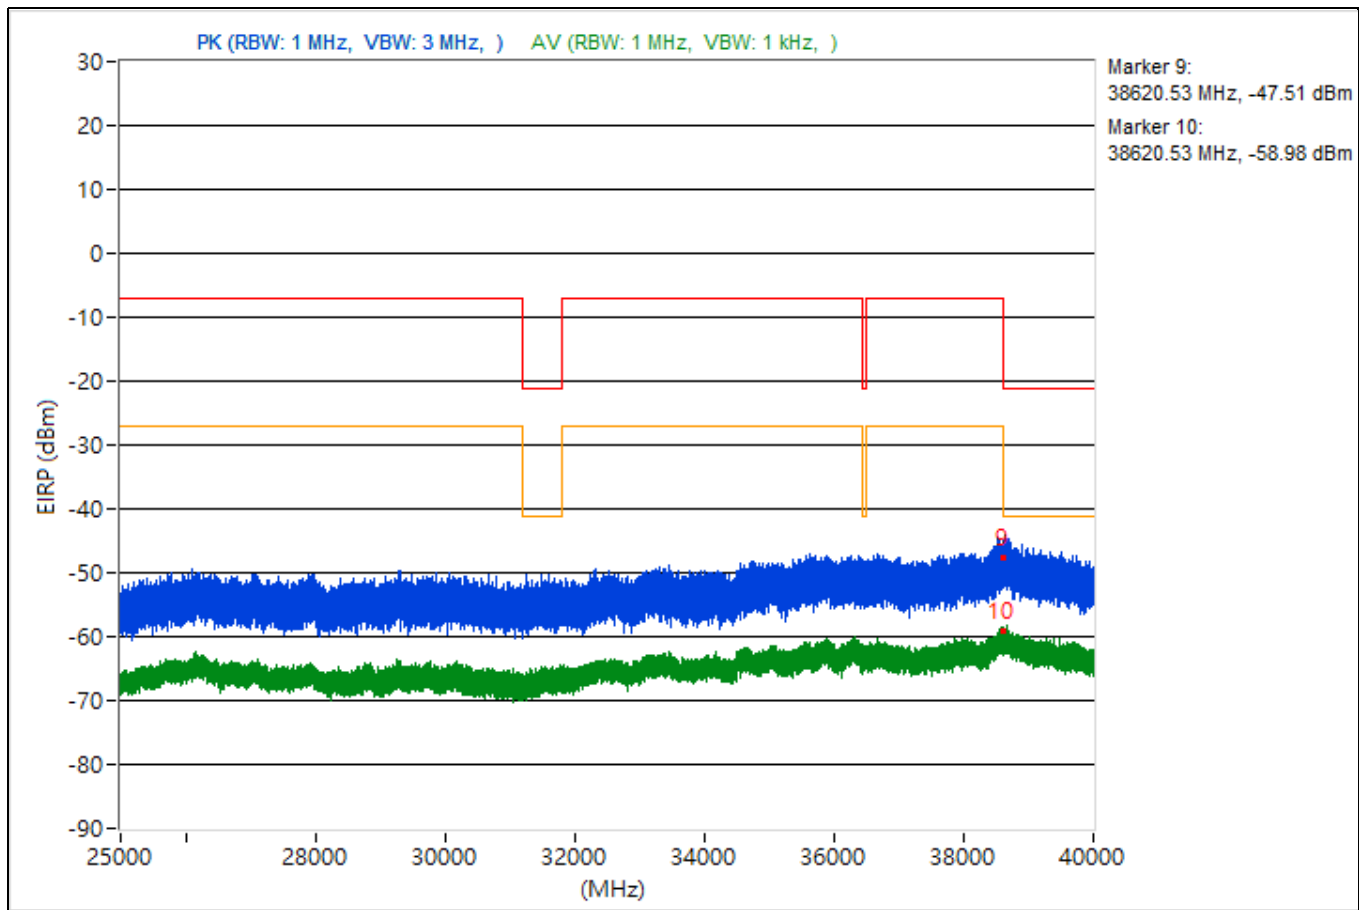


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.03	49.85 PK	74	-24.15	-52.59	-54.24	4.92	-45.41
2	3775.03	38.9 AV	54	-15.1	-64.98	-63.69	4.92	-56.36
3	7256.99	48.21 PK	74	-25.79	-53.53	-57.19	4.92	-47.05
4	7256.99	37.78 AV	54	-16.22	-64.63	-66.37	4.92	-57.48
5	19416	49.49 PK	74	-24.51	-54.71	-52.88	4.92	-45.77
6	19416	39.89 AV	54	-14.11	-65.59	-61.81	4.92	-55.37
7	23752.5	49.42 PK	74	-24.58	-52.57	-55.43	4.92	-45.84
8	23752.5	39.39 AV	54	-14.61	-66.78	-62.05	4.92	-55.87
9	38682.58	45.89 PK	74	-28.11	-55.77	-59.67	4.92	-49.37
10	38682.58	36.55 AV	54	-17.45	-67.86	-65.69	4.92	-58.71

Note: Margin value = Emission Level - Limit value

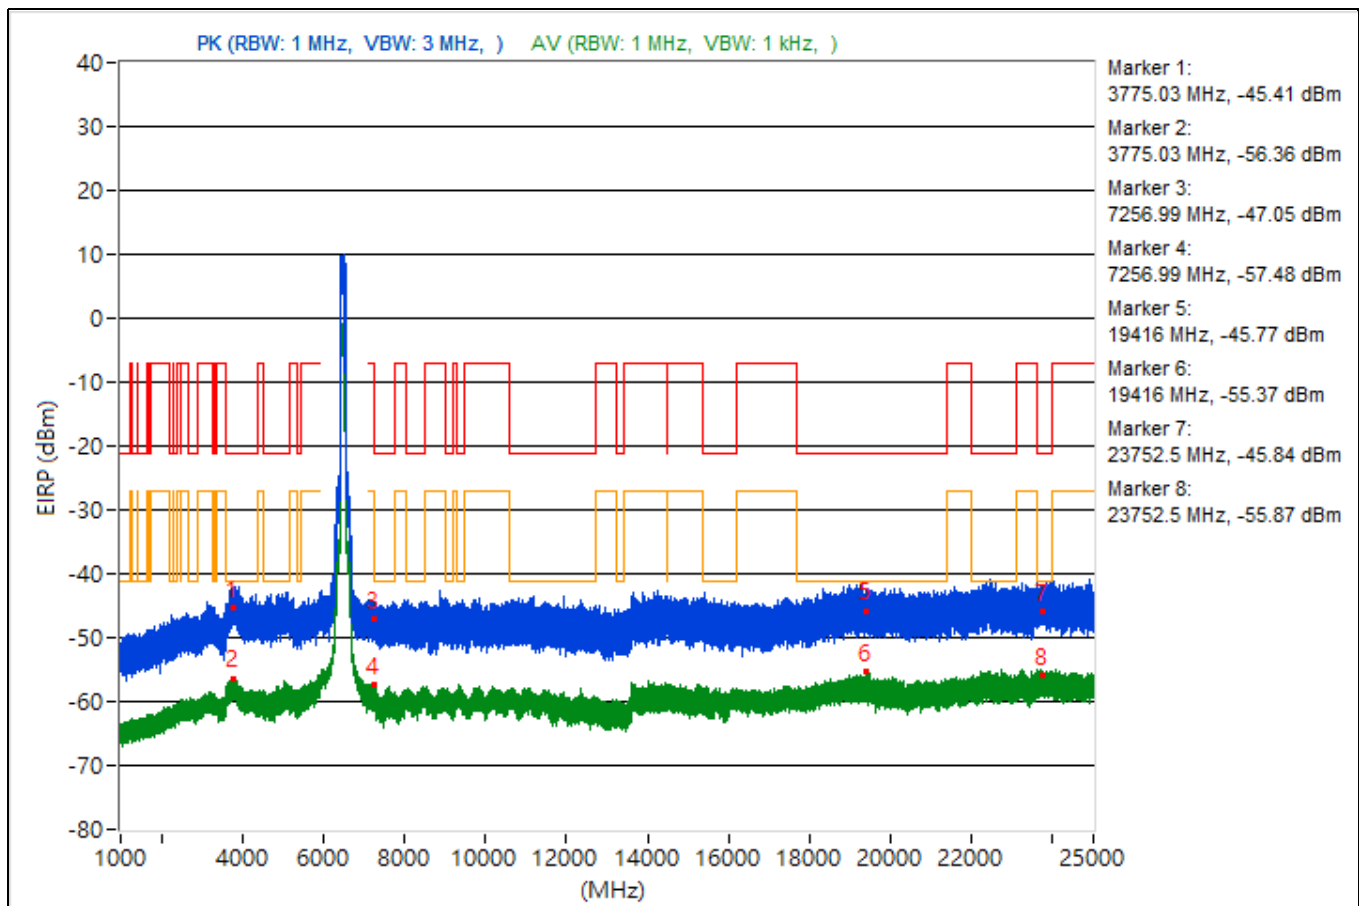


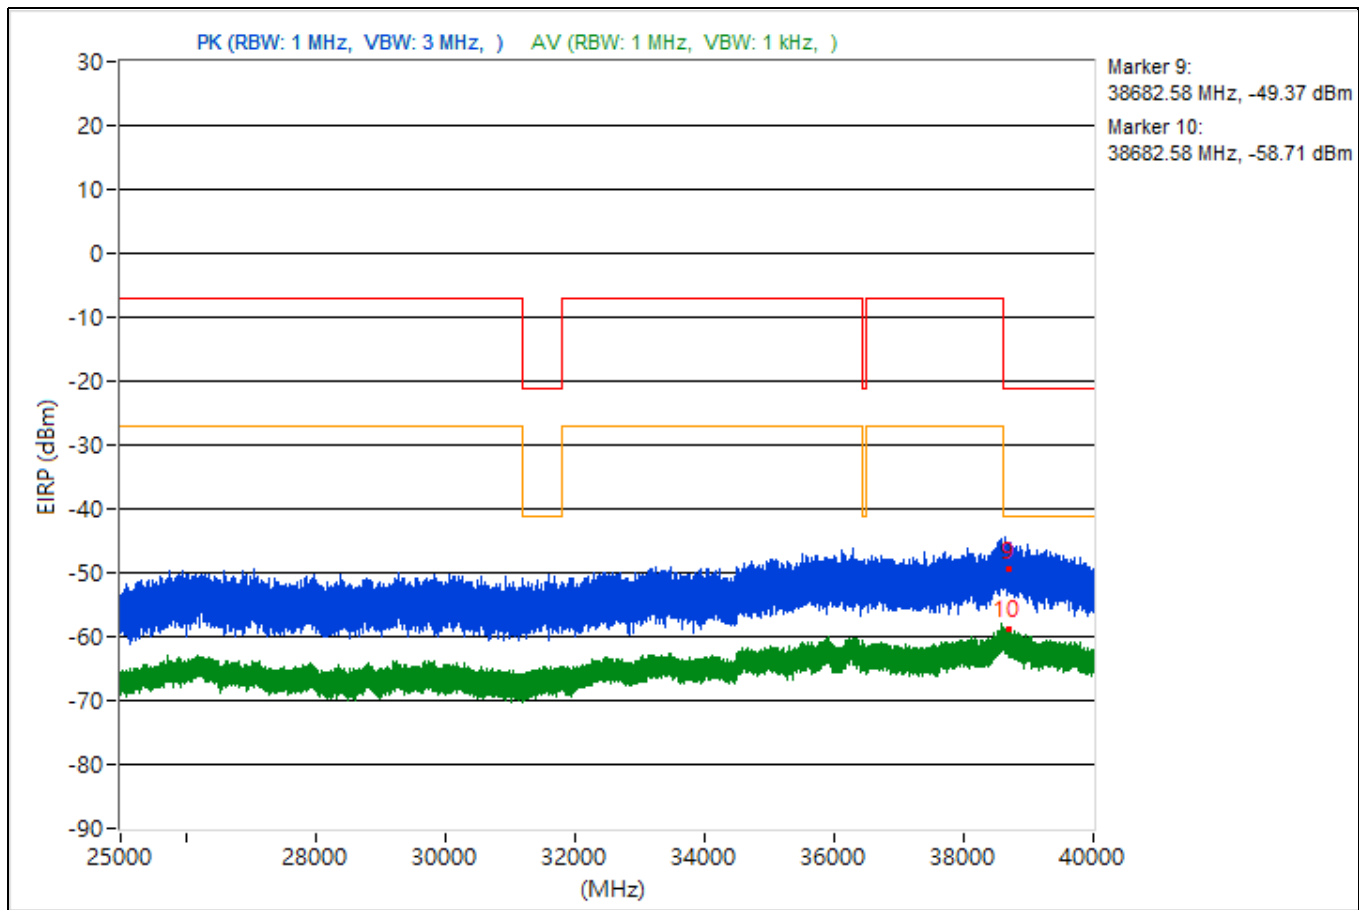


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.24	50.38 PK	74	-23.62	-52.73	-52.88	4.92	-44.88
2	3801.24	38.77 AV	54	-15.23	-63.11	-66.29	4.92	-56.49
3	7290.04	48.62 PK	74	-25.38	-54.85	-54.3	4.92	-46.64
4	7290.04	37.61 AV	54	-16.39	-67.01	-64.5	4.92	-57.65
5	19105	50.57 PK	74	-23.43	-50.07	-59.62	4.92	-44.69
6	19105	39.61 AV	54	-14.39	-64.15	-63.07	4.92	-55.65
7	23716.5	48.99 PK	74	-25.01	-53.34	-55.28	4.92	-46.27
8	23716.5	39.85 AV	54	-14.15	-64.62	-62.35	4.92	-55.41
9	38610.13	46.96 PK	74	-27.04	-54.47	-59.26	4.92	-48.3
10	38610.13	36.67 AV	54	-17.33	-67.59	-65.66	4.92	-58.59

Note: Margin value = Emission Level - Limit value

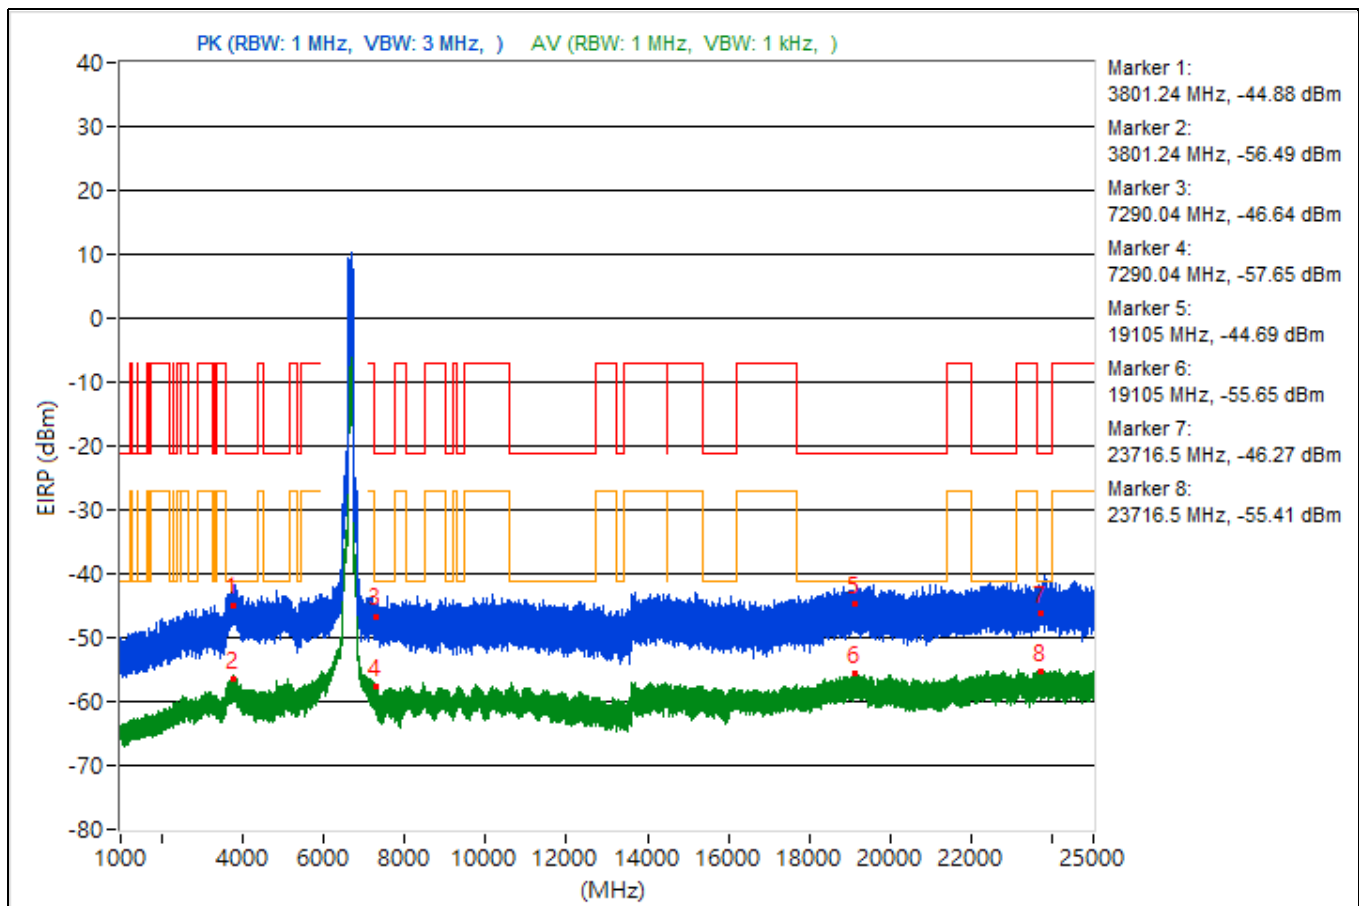


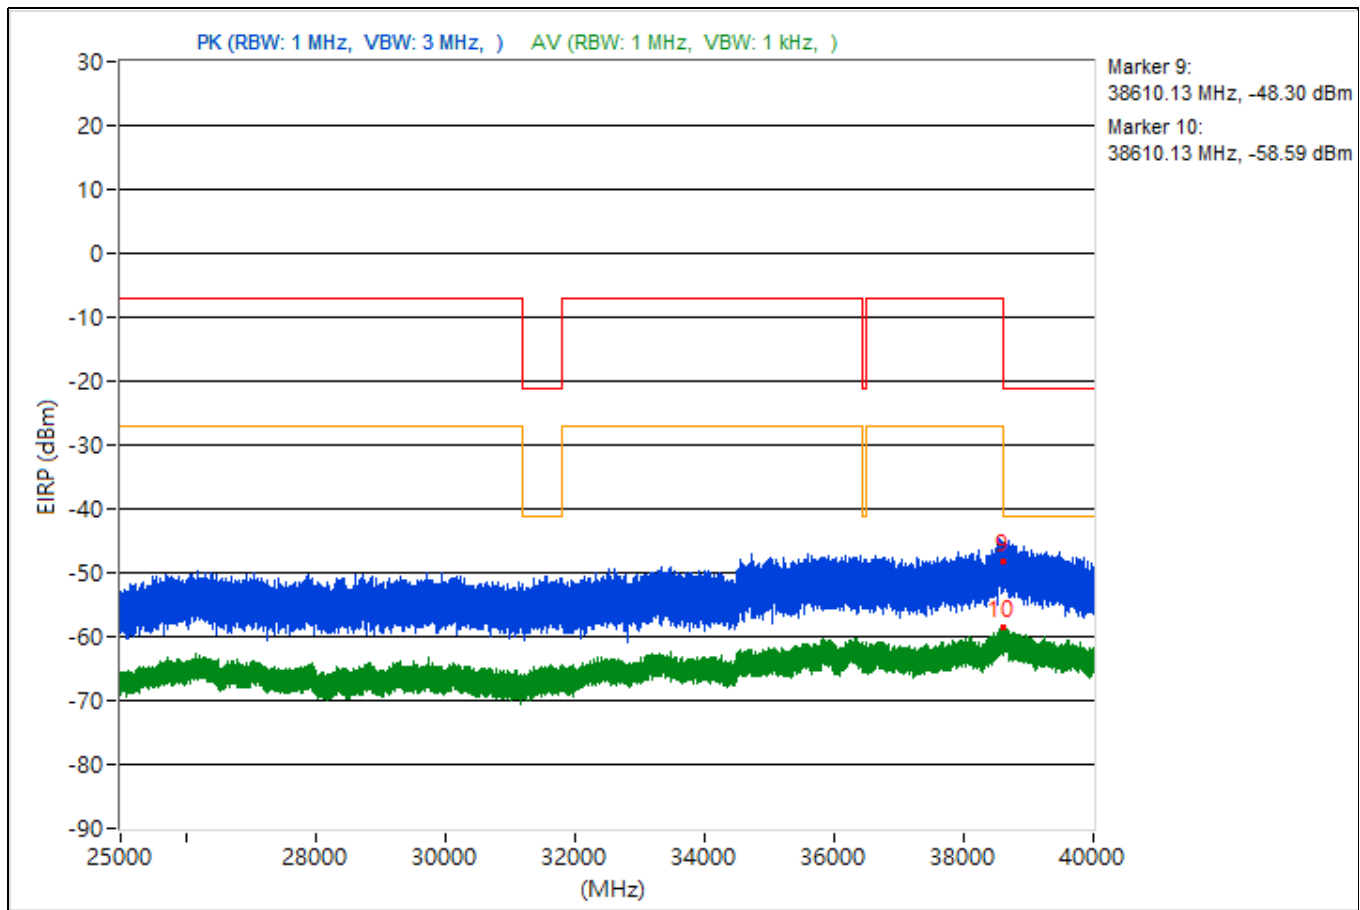


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3829.71	52.63 PK	74	-21.37	-49.22	-52.52	4.92	-42.63
2	3829.71	38.52 AV	54	-15.48	-63.4	-66.47	4.92	-56.74
3	7272.39	47.39 PK	74	-26.61	-55.4	-56.24	4.92	-47.87
4	7272.39	38.35 AV	54	-15.65	-64.11	-65.71	4.92	-56.91
5	19508	49.79 PK	74	-24.21	-52.09	-55.28	4.92	-45.47
6	19508	38.66 AV	54	-15.34	-62.68	-67.8	4.92	-56.6
7	22318	50.3 PK	74	-23.7	-56.02	-51.09	4.92	-44.96
8	22318	40.01 AV	54	-13.99	-62.26	-64.34	4.92	-55.25
9	38602.31	45.44 PK	74	-28.56	-56.13	-60.36	4.92	-49.82
10	38602.31	36.84 AV	54	-17.16	-65.98	-66.76	4.92	-58.42

Note: Margin value = Emission Level - Limit value

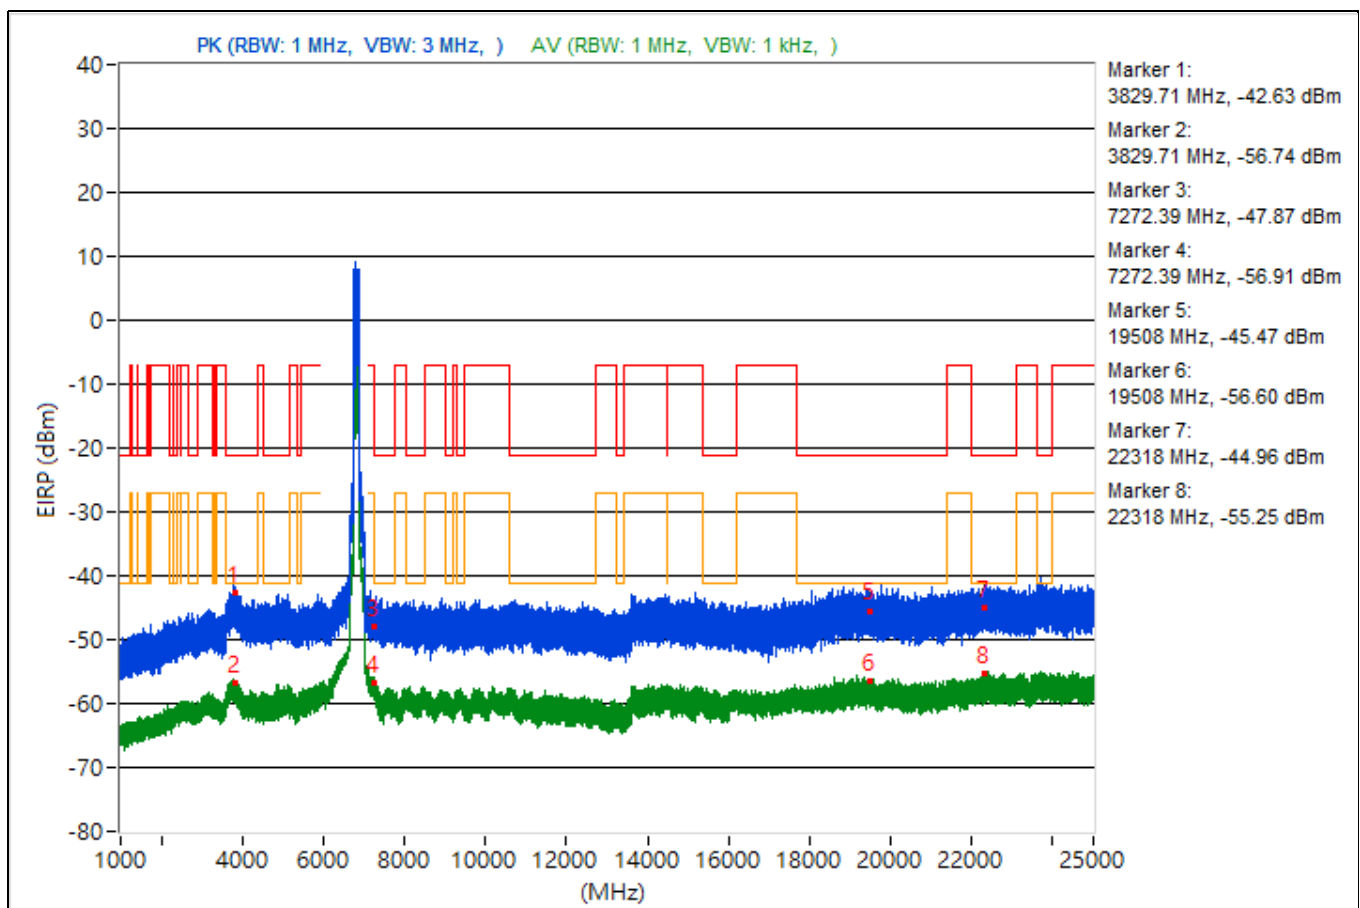


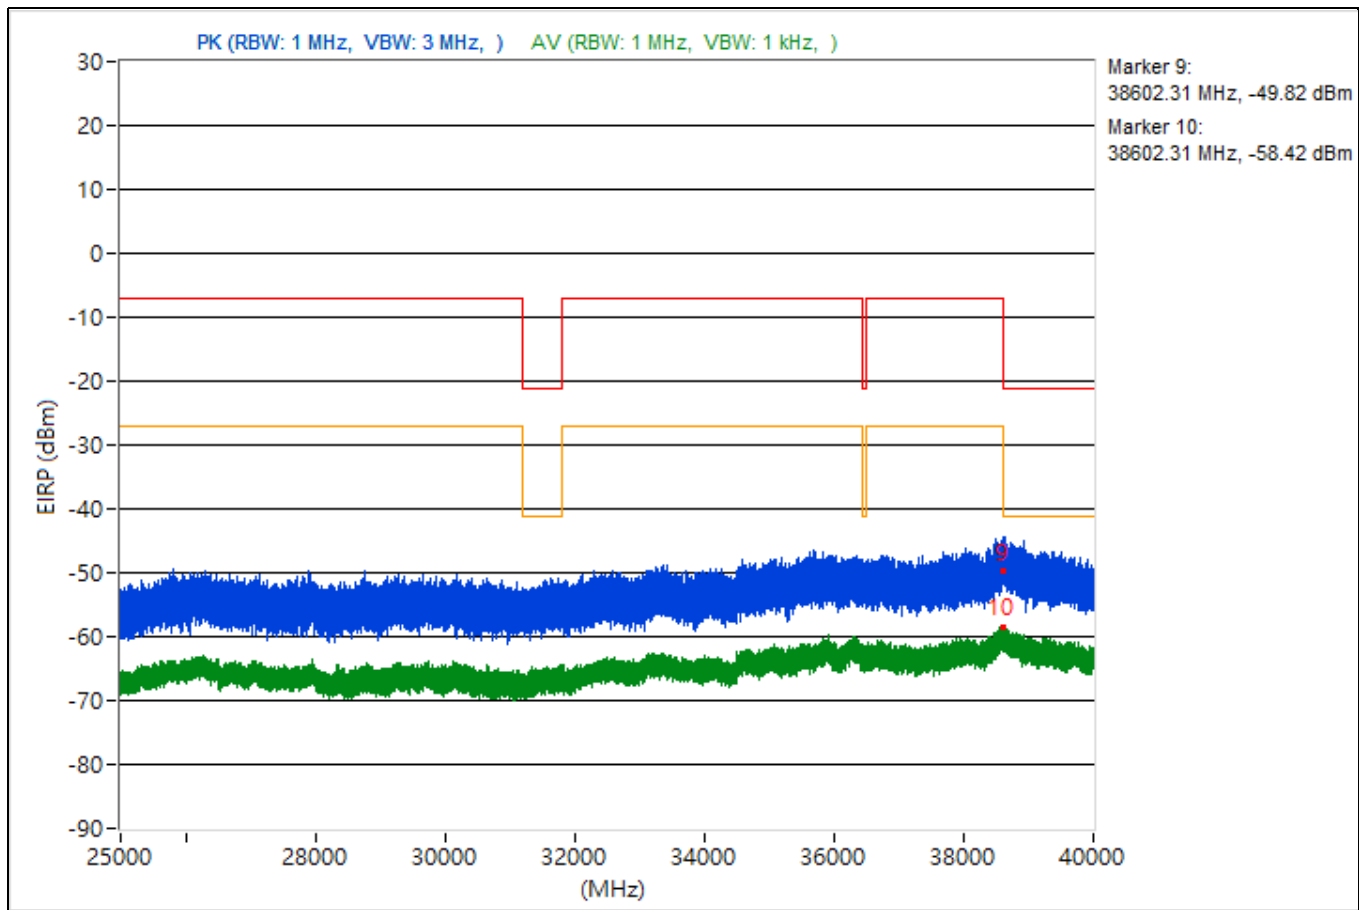


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.1	50.71 PK	74	-23.29	-53.07	-51.96	4.92	-44.55
2	3809.1	38.57 AV	54	-15.43	-63.13	-66.89	4.92	-56.69
3	7251.39	48.54 PK	74	-25.46	-56.74	-53.24	4.92	-46.72
4	7251.39	40.6 AV	54	-13.4	-61.95	-63.35	4.92	-54.66
5	19894.3	48.68 PK	74	-25.32	-54.82	-54.22	4.92	-46.58
6	19894.3	39.28 AV	54	-14.72	-62.68	-65.62	4.92	-55.98
7	23805.5	50.25 PK	74	-23.75	-54.84	-51.63	4.92	-45.01
8	23805.5	40.14 AV	54	-13.86	-61.71	-65	4.92	-55.12
9	38712.71	45.23 PK	74	-28.77	-58.32	-57.62	4.92	-50.03
10	38712.71	36.65 AV	54	-17.35	-67.6	-65.68	4.92	-58.61

Note: Margin value = Emission Level - Limit value

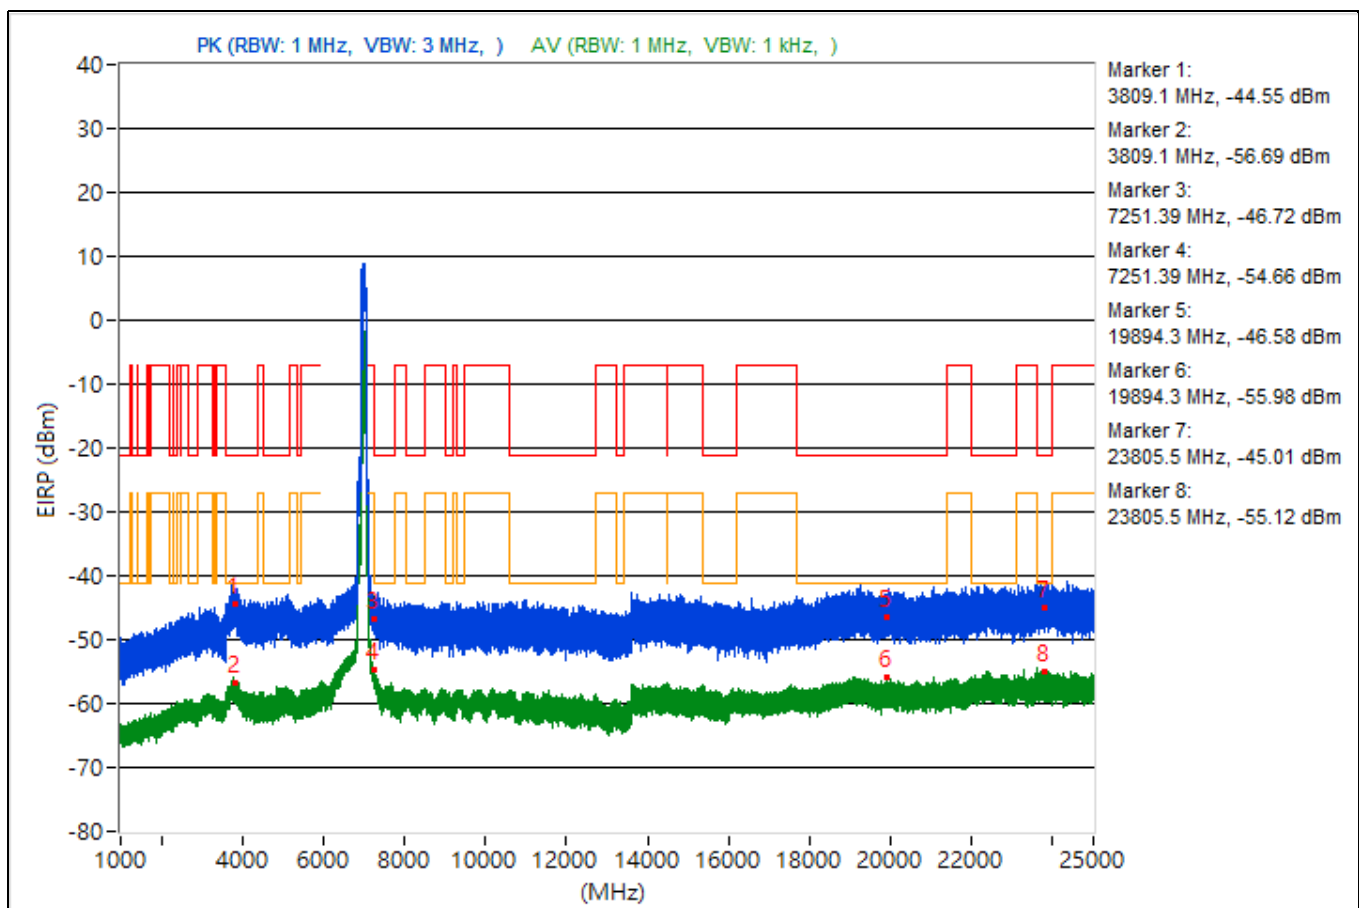

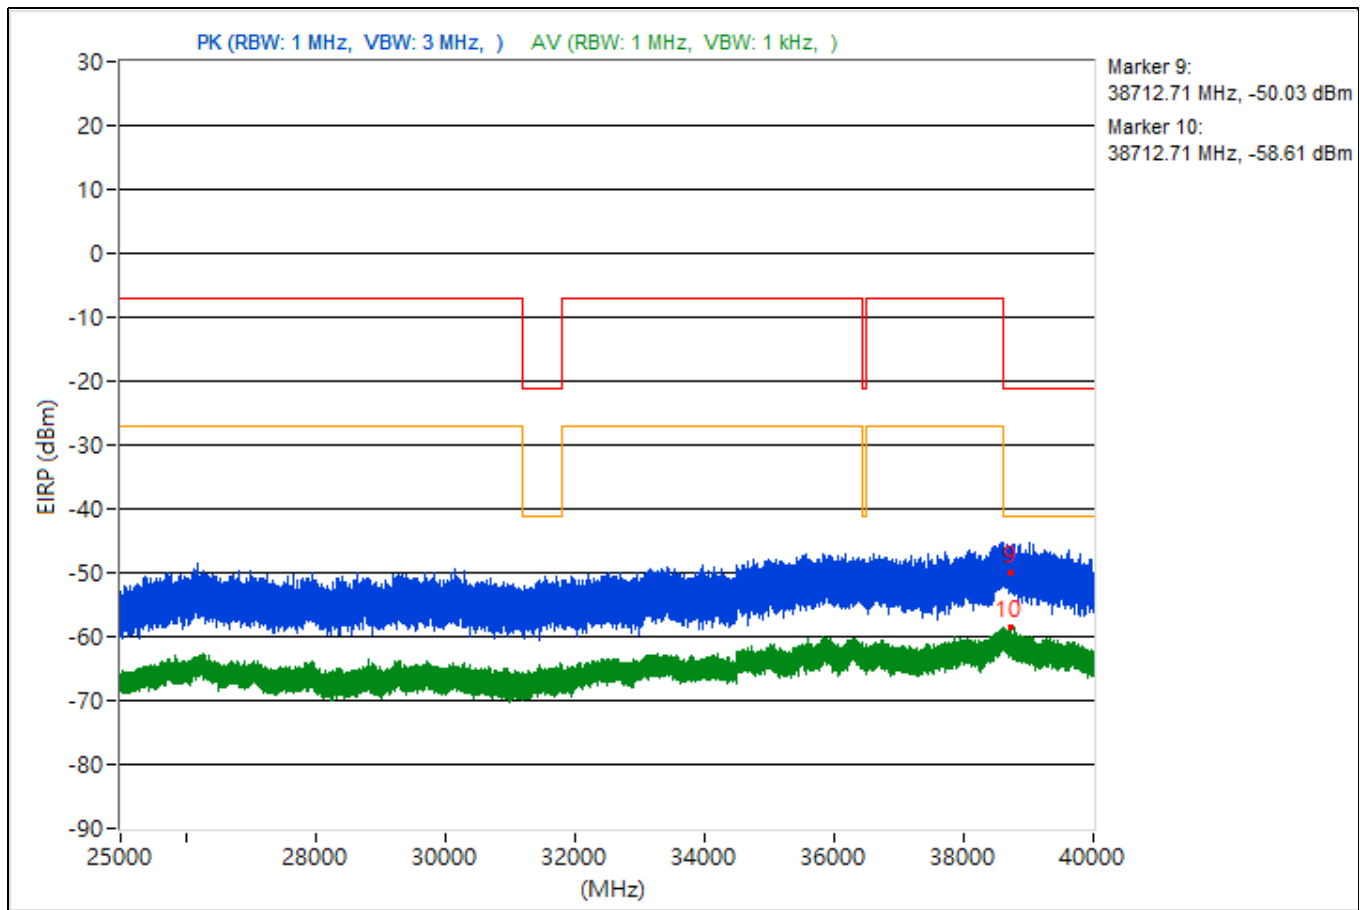


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5931.8	101.5 PK			-4.29	-4.81	7.77	6.24
2	*5931.8	93.39 AV			-12.47	-12.85	7.77	-1.87
3	#5924.98	71.99 PK	88.26	-16.27	-32.77	-35.88	7.77	-23.27
4	#5924.98	54.02 AV	68.26	-14.24	-51.64	-52.45	7.77	-41.24

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

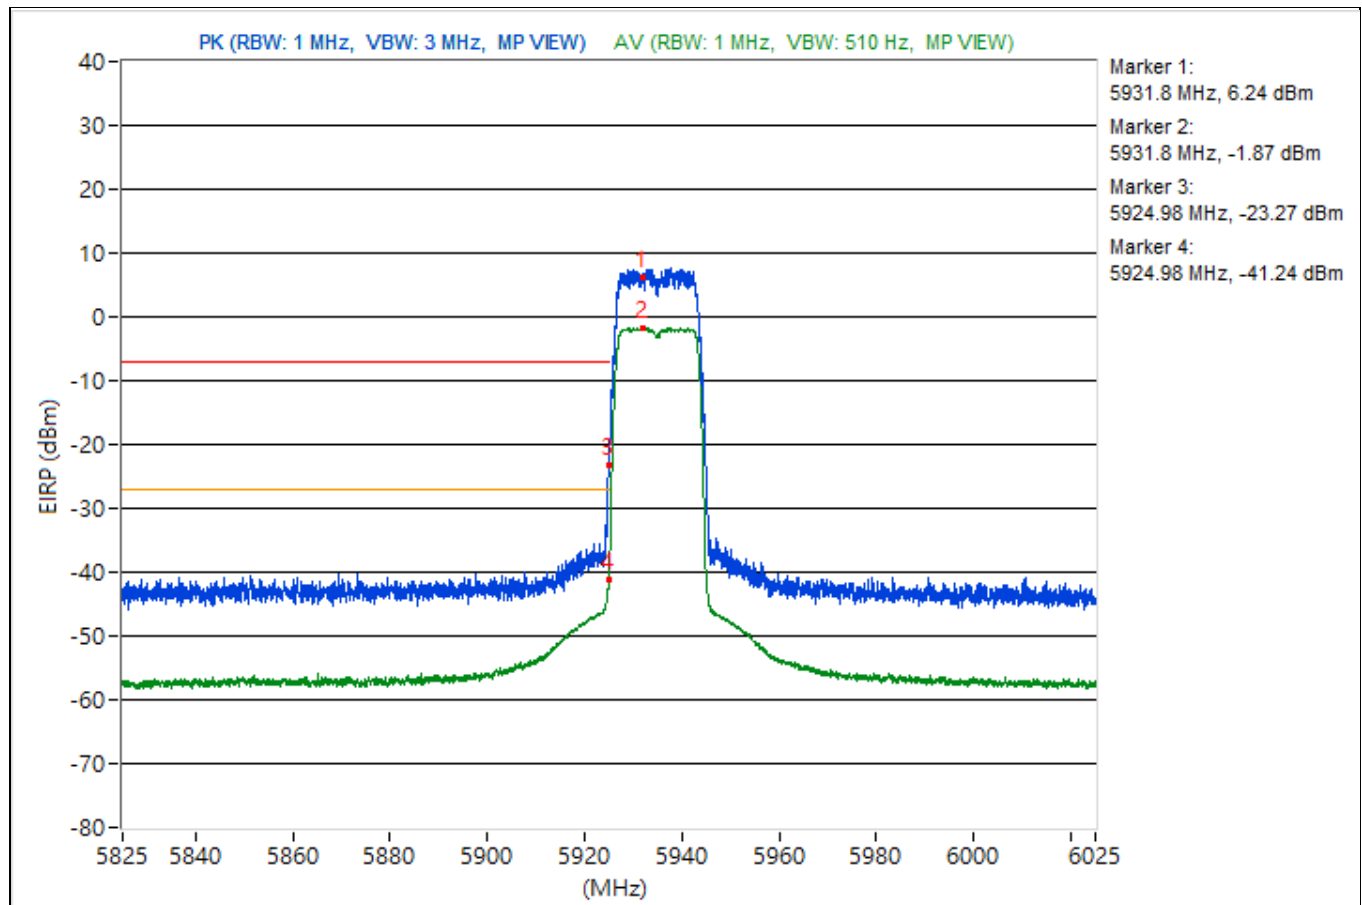


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.93	102.51 PK			-3.07	-4.04	7.77	7.25
2	*5953.93	94.9 AV			-11.16	-11.12	7.77	-0.36
3	#5923.65	52.86 PK	88.26	-35.4	-52.61	-53.84	7.77	-42.4
4	#5923.65	40.3 AV	68.26	-27.96	-65.14	-66.45	7.77	-54.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

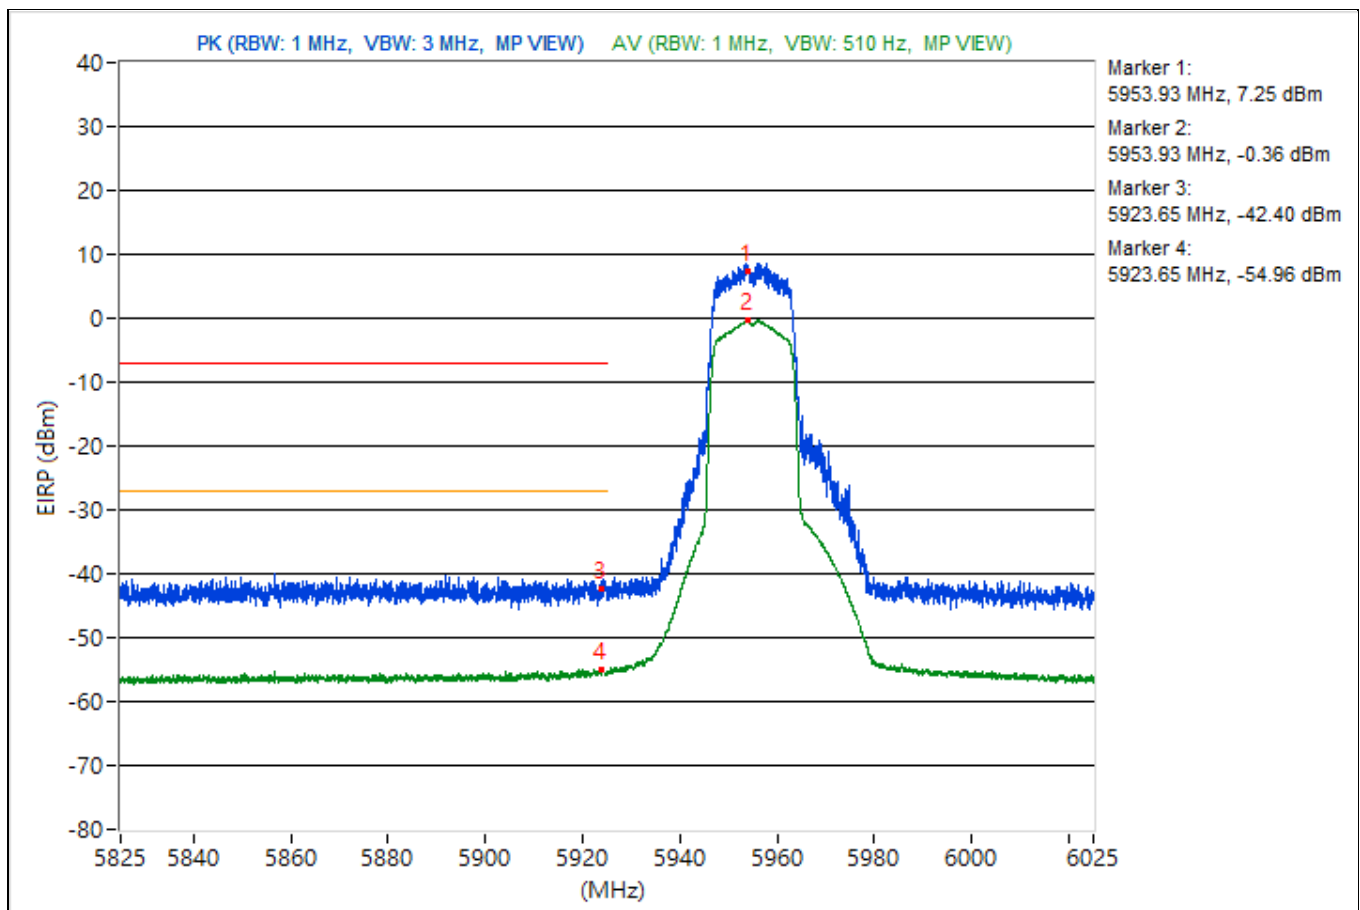


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7113.9	101.49 PK			-3.91	-3.85	7.1	6.23
2	*7113.9	94.54 AV			-10.84	-10.83	7.1	-0.72
3	#7125	71 PK	88.26	-17.26	-34.25	-34.5	7.1	-24.26
4	#7125	52.9 AV	68.26	-15.36	-52.49	-52.45	7.1	-42.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

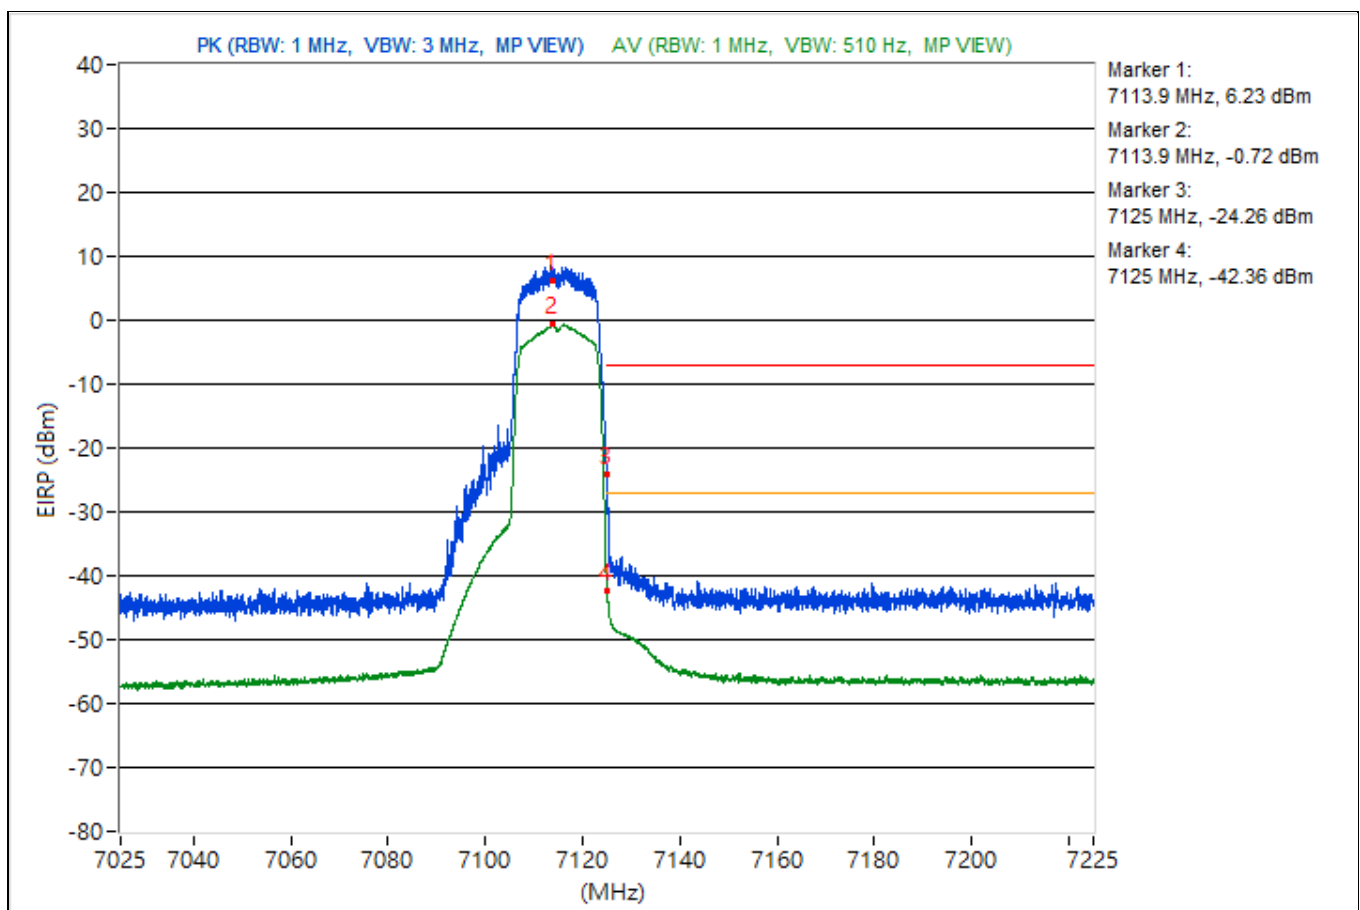


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.87	88.82 PK			-13.62	-14.89	4.76	-6.44
2	*5935.87	80.84 AV			-21.69	-22.77	4.76	-14.42
3	#5924.98	78.59 PK	88.26	-9.67	-23.88	-25.08	4.76	-16.67
4	#5924.98	68.11 AV	68.26	-0.15	-34.48	-35.4	4.76	-27.15

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

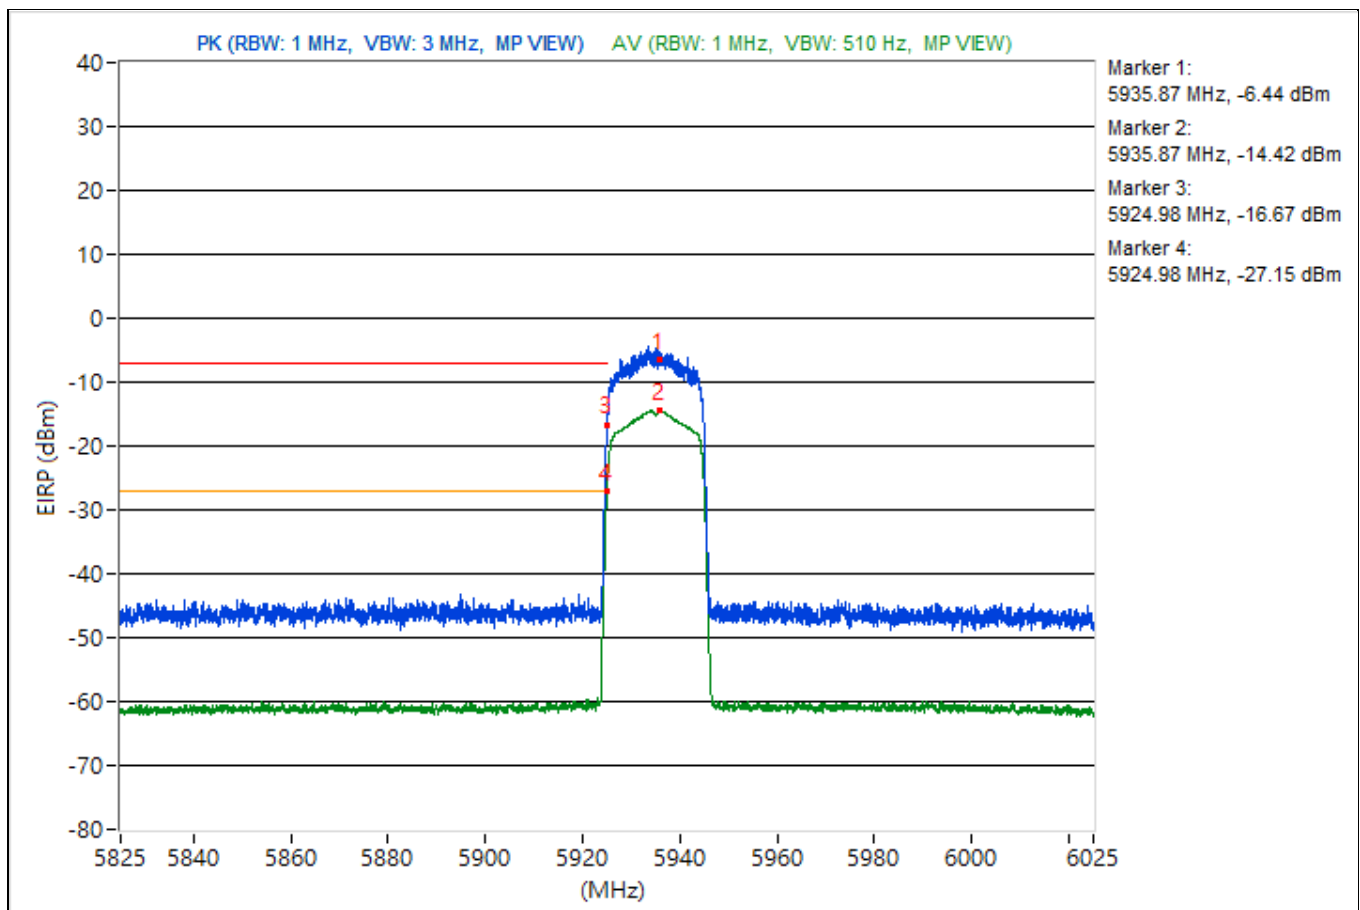


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.7	102.2 PK			-0.74	-0.92	4.76	6.94
2	*5953.7	94 AV			-9.08	-8.98	4.76	-1.26
3	#5919.9	49.16 PK	88.26	-39.1	-53.75	-54	4.76	-46.1
4	#5919.9	38.52 AV	68.26	-29.74	-64.15	-64.9	4.76	-56.74

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

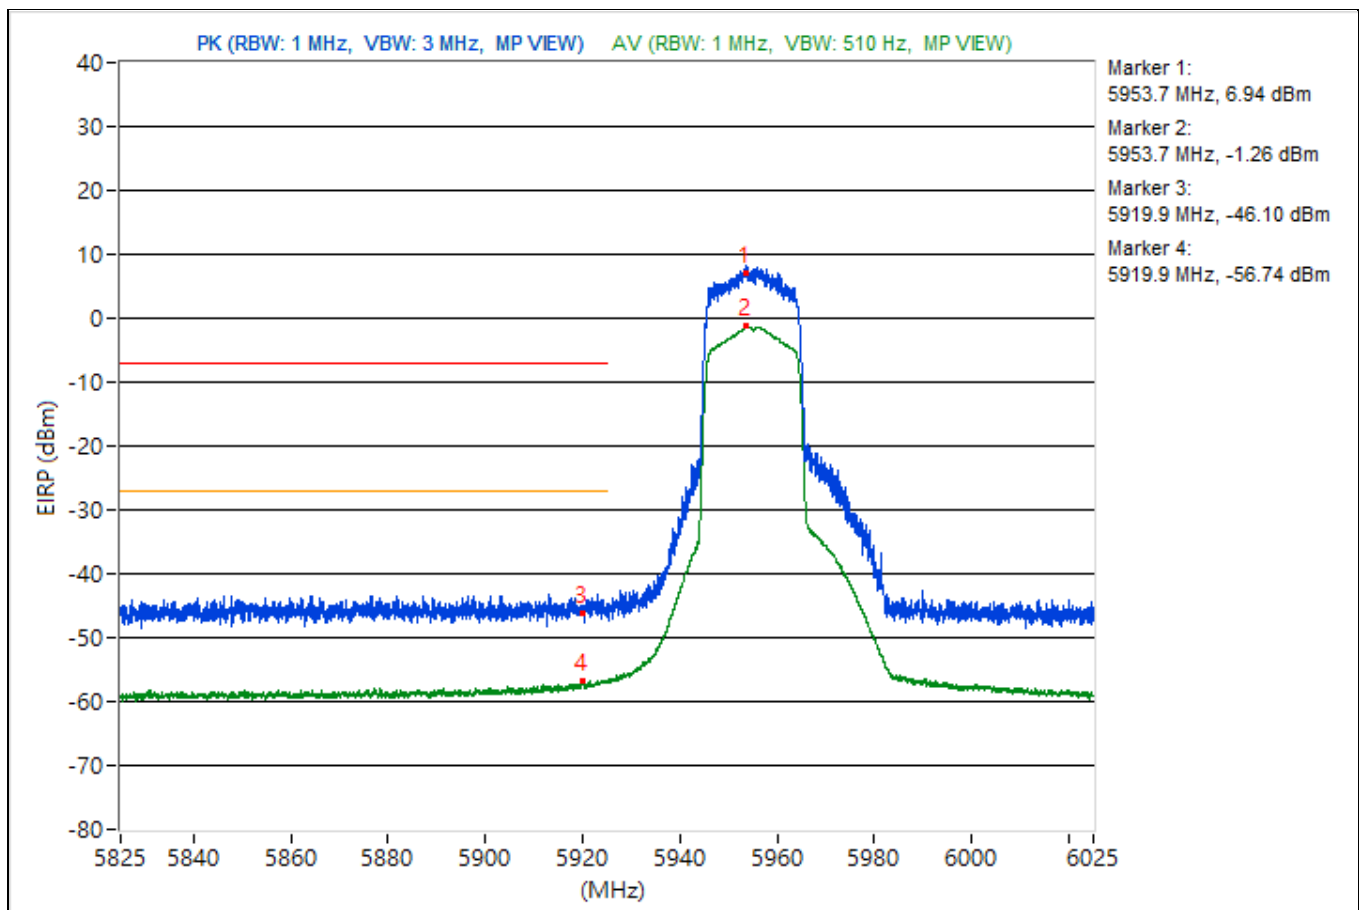


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7115.85	99.62 PK			-2.51	-2.97	4.09	4.36
2	*7115.85	91.32 AV			-10.25	-12.01	4.09	-3.94
3	#7125	88.19 PK	88.26	-0.07	-13.35	-15.19	4.09	-7.07
4	!#7125	79.01 AV	68.26	10.75	-22.66	-24.17	4.09	-16.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

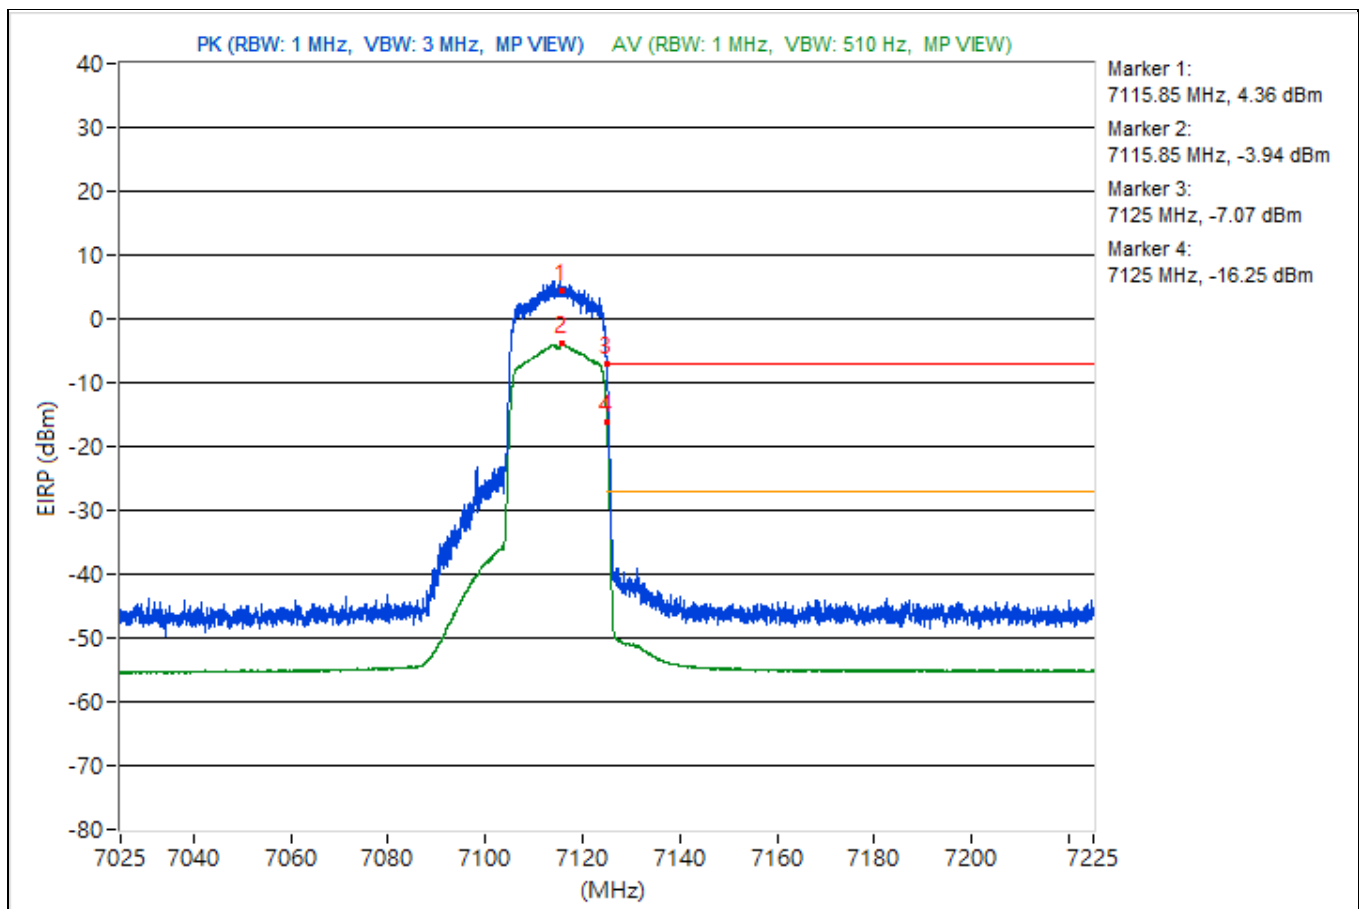


For Integration method:

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	47.89 AV	68.2	-20.31	-55.12	-53.9	4.09	-47.37

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

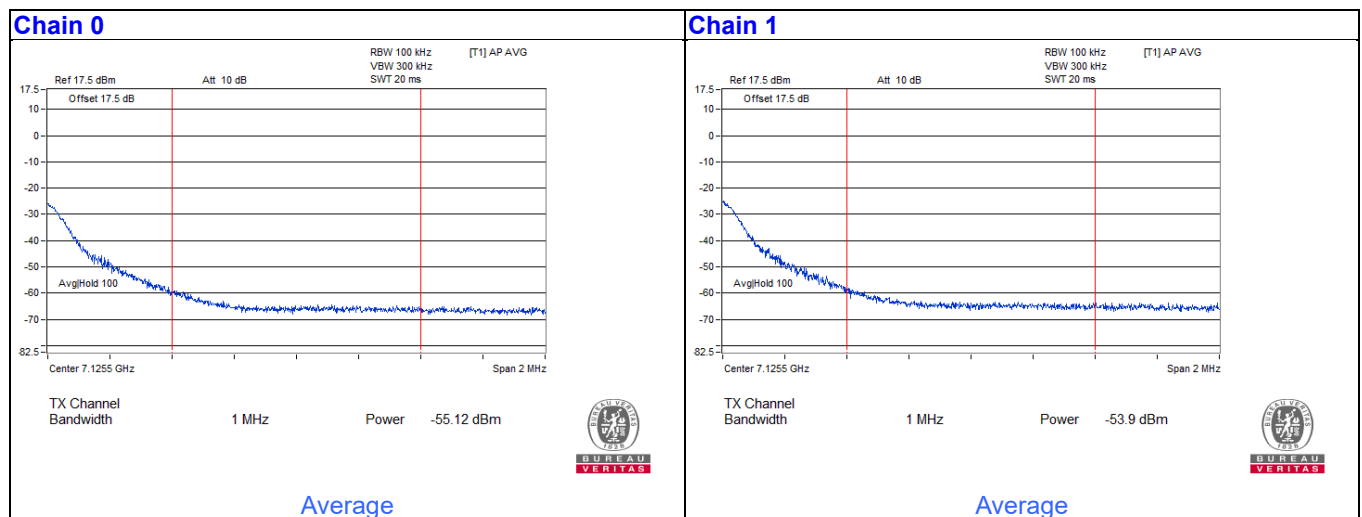


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5963.85	102.41 PK			0.15	-1.56	4.76	7.15
2	*5963.85	94.52 AV			-8.37	-8.66	4.76	-0.74
3	#5924.45	59.81 PK	88.26	-28.45	-42.92	-43.55	4.76	-35.45
4	#5924.45	47.94 AV	68.26	-20.32	-55.51	-54.71	4.76	-47.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

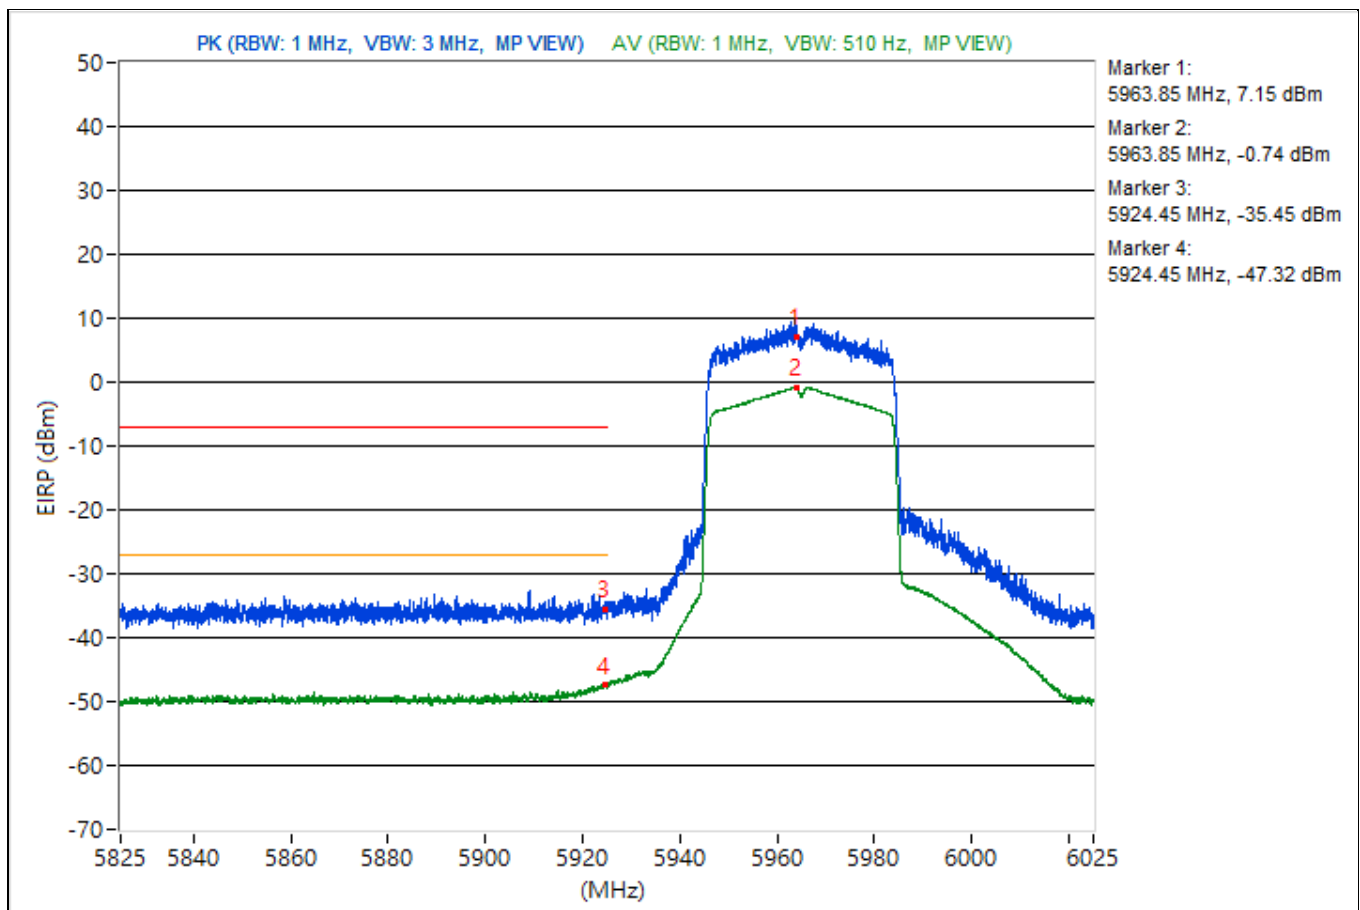


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7083.25	105.2 PK			3.62	1.88	4.09	9.94
2	*7083.25	96.66 AV			-5.06	-6.46	4.09	1.4
3	#7223.75	59.85 PK	88.26	-28.41	-42.6	-42.42	4.09	-35.41
4	#7223.75	50.63 AV	68.26	-17.63	-51.49	-51.99	4.09	-44.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

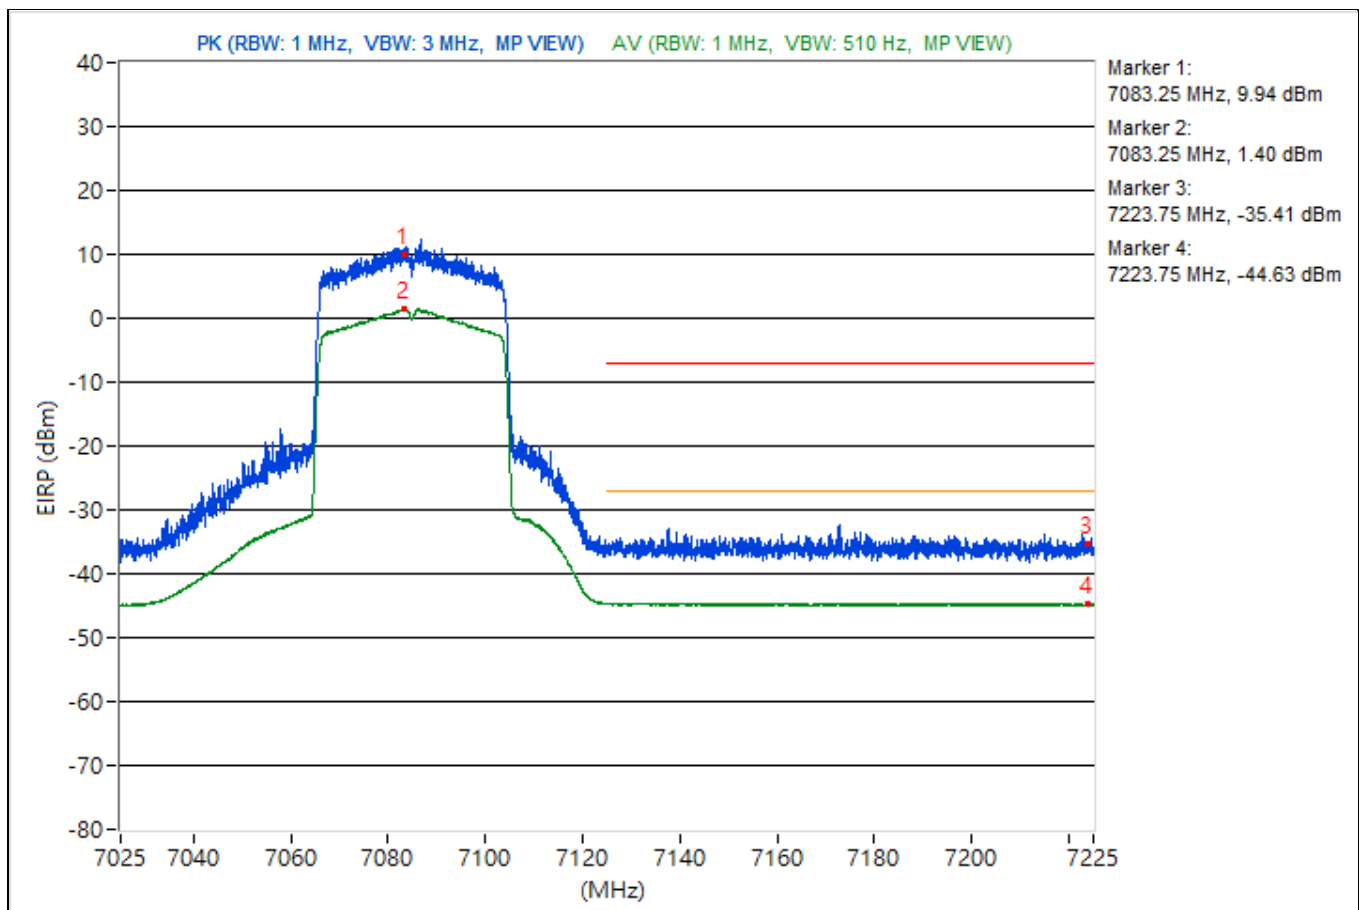


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.775 GHz ~ 6.075 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5984.02	103.71 PK			-1.36	2.06	4.76	8.45
2	*5984.02	94.24 AV			-8.46	-9.14	4.76	-1.02
3	#5919.15	59.6 PK	88.26	-28.66	-44.9	-42.33	4.76	-35.66
4	#5919.15	49.21 AV	68.26	-19.05	-54.22	-53.45	4.76	-46.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

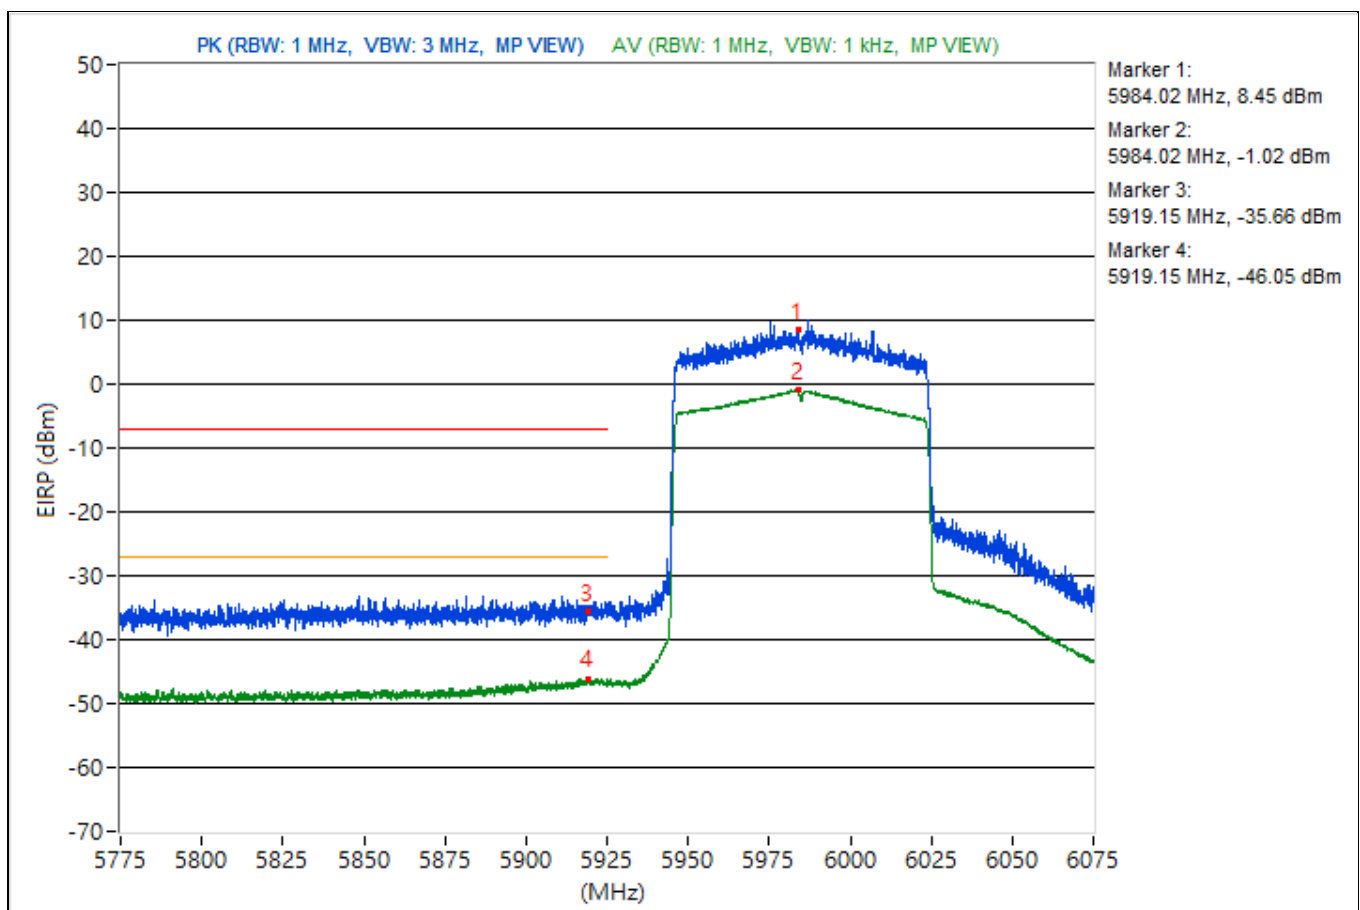


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	6.925 GHz ~ 7.325 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7023.25	102.85 PK			1.02	-0.12	4.09	7.59
2	*7023.25	94.55 AV			-7.69	-7.92	4.09	-0.71
3	#7134.7	58.81 PK	88.26	-29.45	-43.26	-43.87	4.09	-36.45
4	#7134.7	47.34 AV	68.26	-20.92	-54.33	-55.83	4.09	-47.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

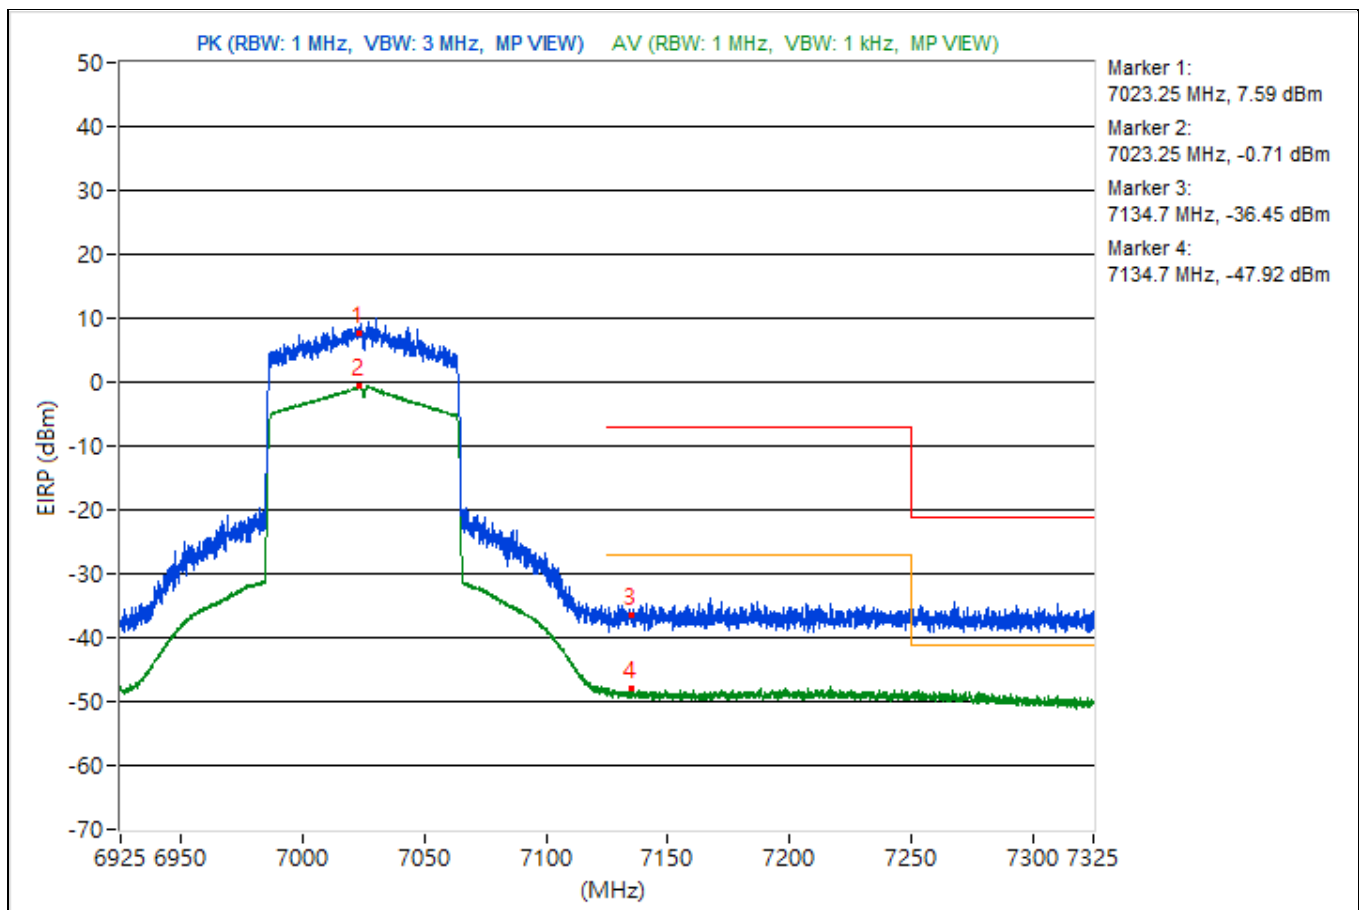


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.8	103.43 PK			0.71	0.08	4.76	8.17
2	*6022.8	95.16 AV			-7.62	-8.13	4.76	-0.1
3	#5920.52	70.5 PK	88.26	-17.76	-33.16	-31.98	4.76	-24.76
4	#5920.52	61.81 AV	68.26	-6.45	-40.93	-41.53	4.76	-33.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

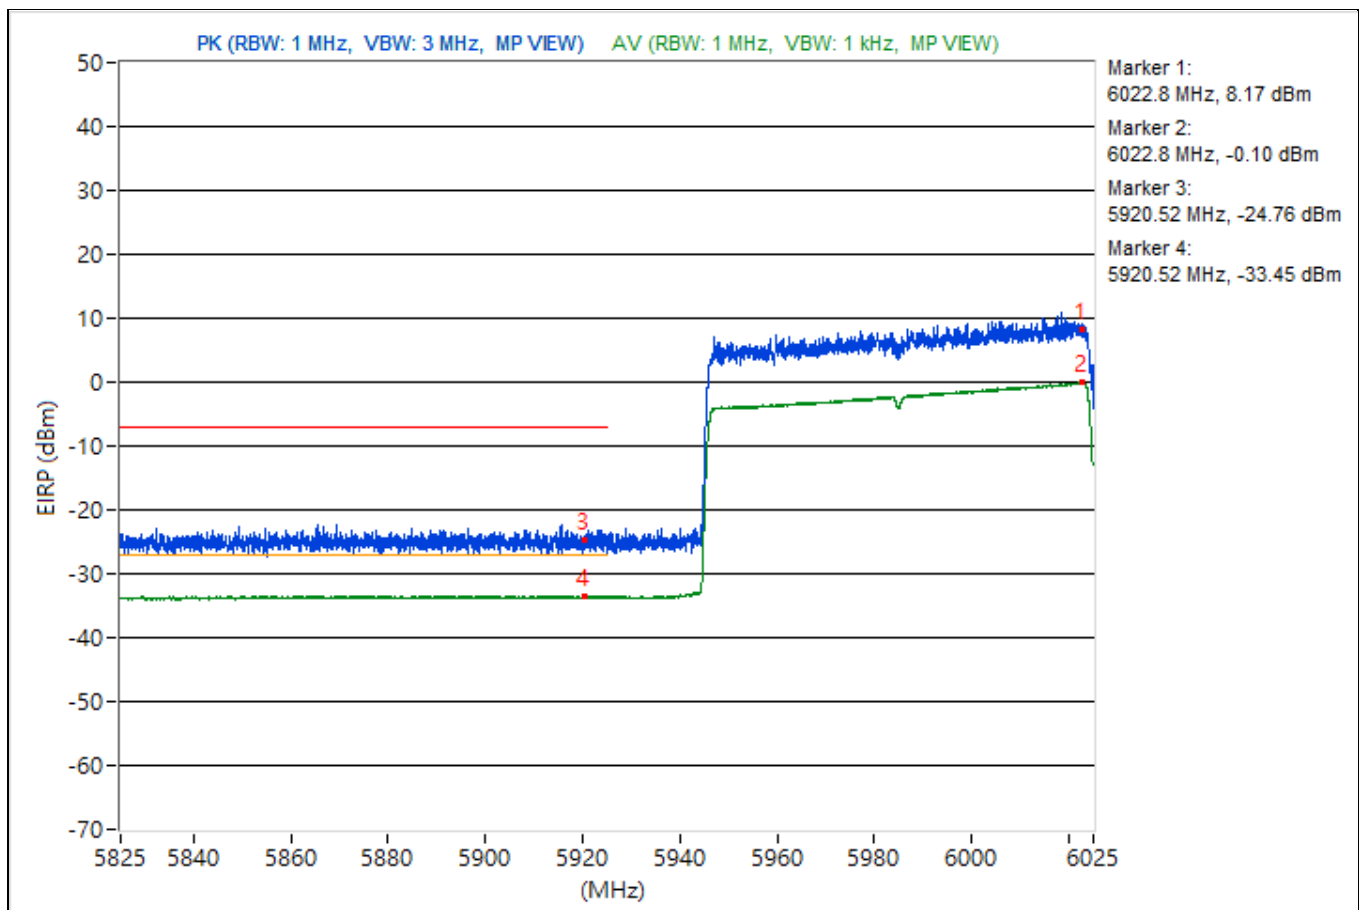


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	6.925 GHz ~ 7.325 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6982.75	104.83 PK			3.45	1.19	4.09	9.57
2	*6982.75	96.28 AV			-5.82	-6.35	4.09	1.02
3	#7125.15	67.65 PK	88.26	-20.61	-34.44	-35	4.09	-27.61
4	#7125.15	57.99 AV	68.26	-10.27	-44.11	-44.64	4.09	-37.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

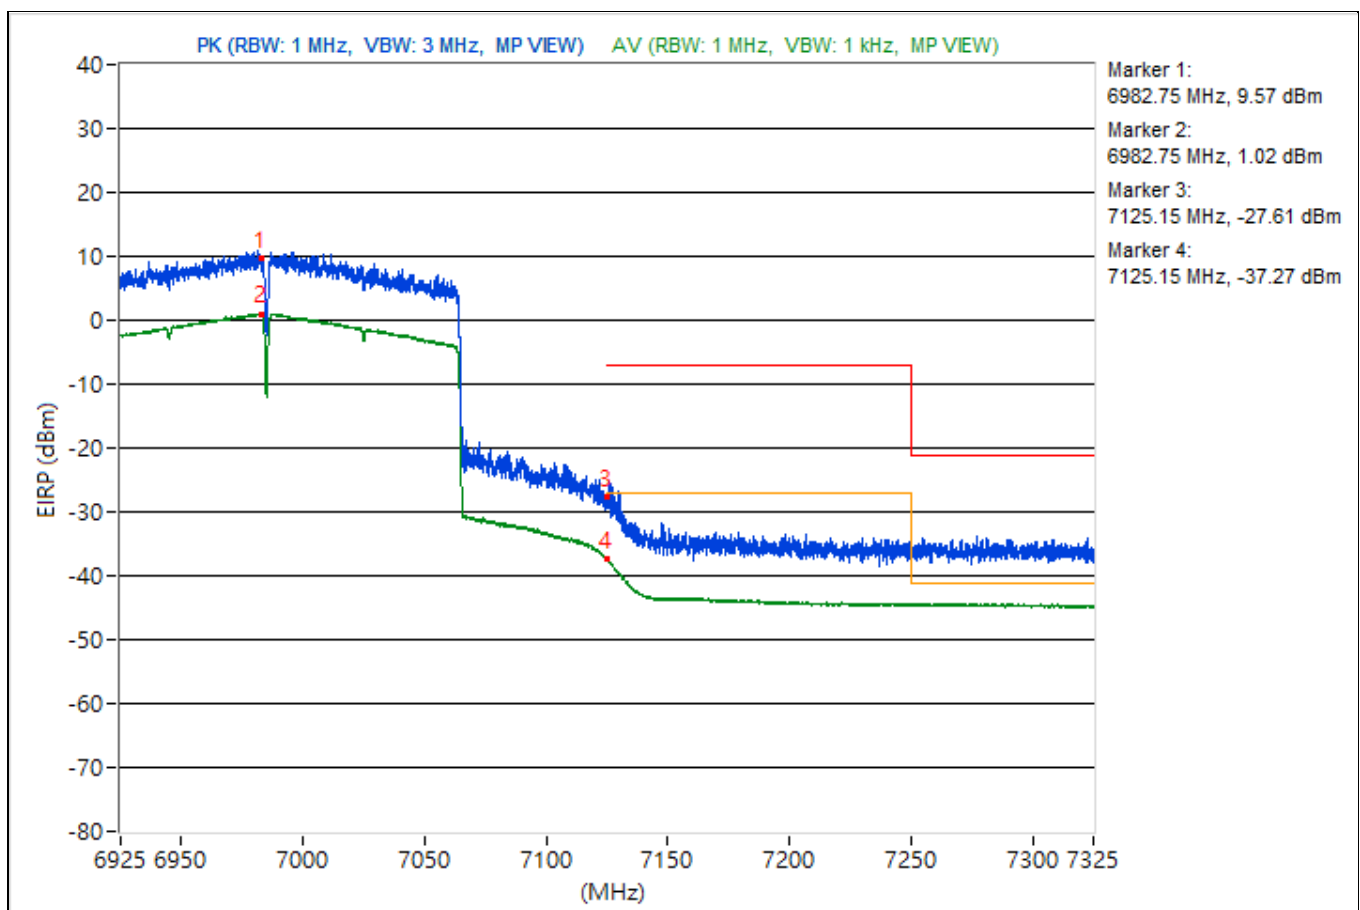


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.37	96.51 PK			-6.5	-6.54	4.76	1.25
2	*5926.37	88.46 AV			-14.09	-15.12	4.76	-6.8
3	#5924.98	87.24 PK	88.26	-1.02	-16.03	-15.56	4.76	-8.02
4	!#5924.98	78.58 AV	68.26	10.32	-24.21	-24.71	4.76	-16.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

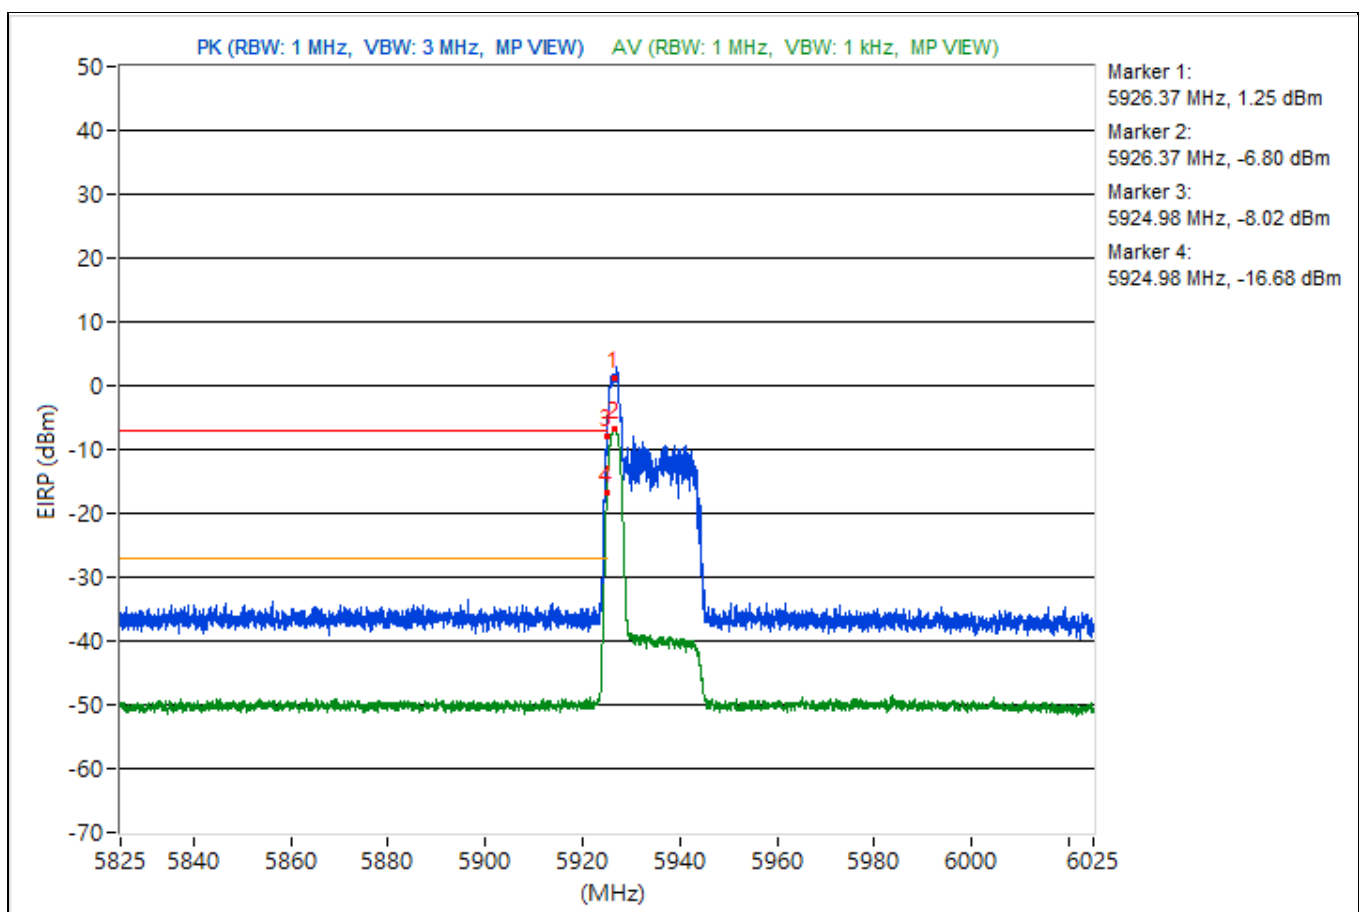


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	57.25 AV	68.2	-10.95	-45.52	-46.06	4.76	-38.01

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

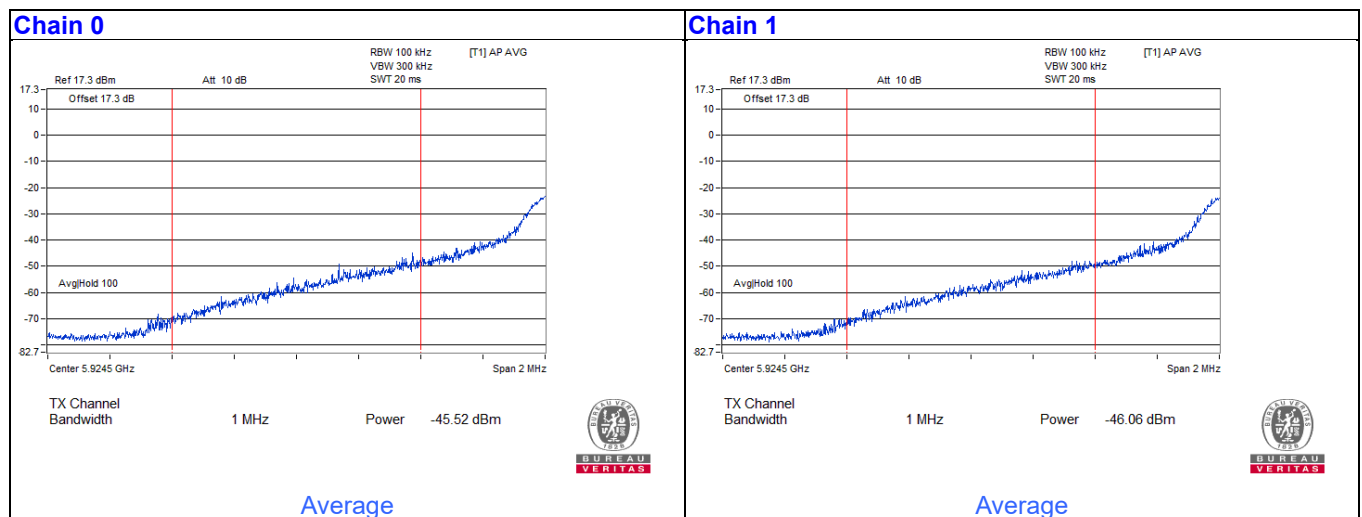


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.48	102.94 PK			0.21	-0.42	4.76	7.68
2	*5946.48	94.65 AV			-8.22	-8.55	4.76	-0.61
3	#5882.05	48.29 PK	88.26	-39.97	-54.09	-55.49	4.76	-46.97
4	#5882.05	36.81 AV	68.26	-31.45	-67.15	-65.46	4.76	-58.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

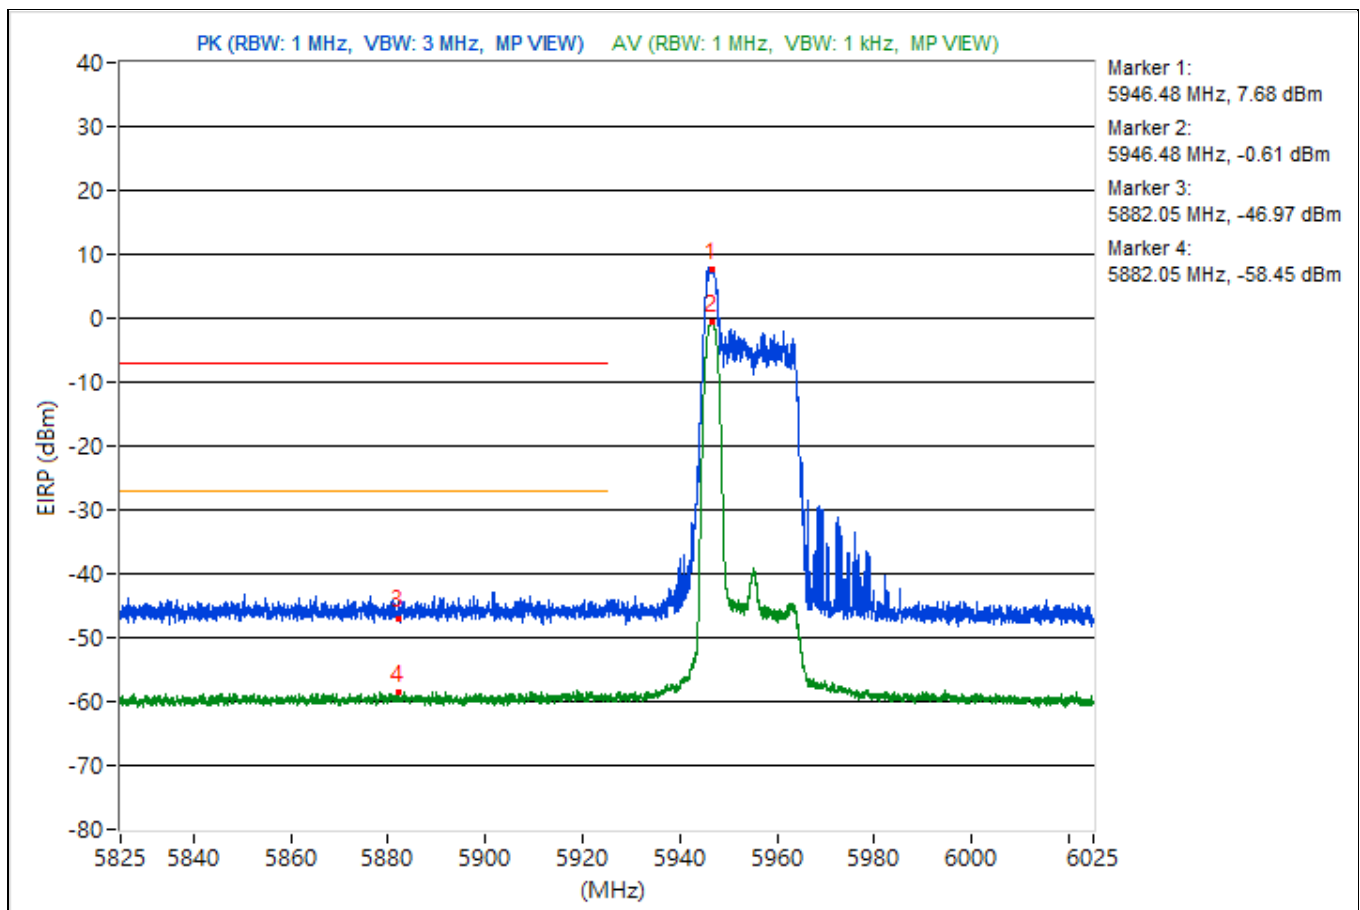


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7123.41	99.45 PK			-1.63	-4.72	4.09	4.19
2	*7123.41	88.92 AV			-12.82	-14.17	4.09	-6.34
3	#7125	88.24 PK	88.26	-0.02	-12.79	-16.05	4.09	-7.02
4	!#7125	79.2 AV	68.26	10.94	-22.56	-23.86	4.09	-16.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

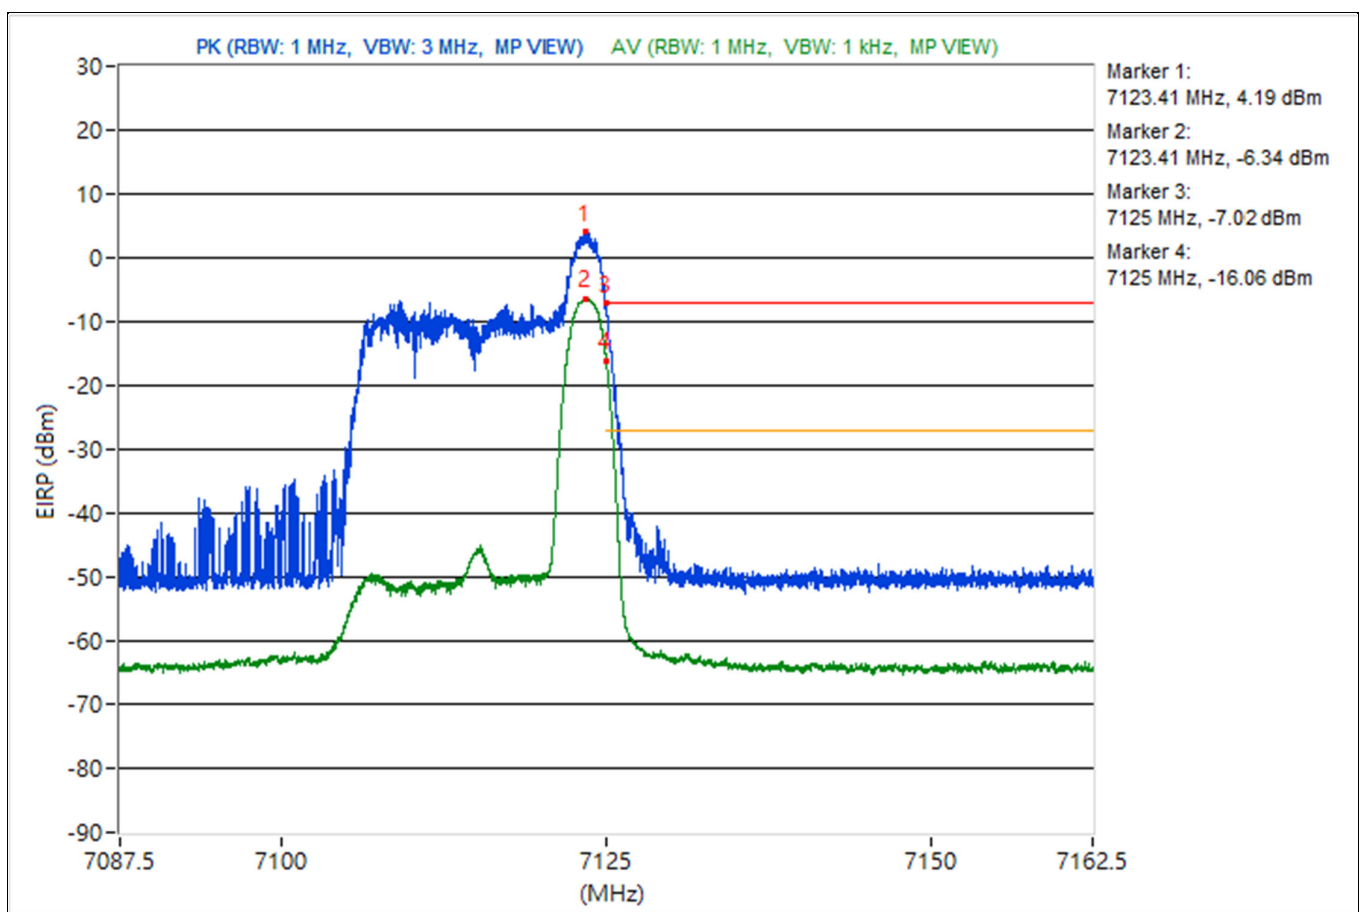


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	54.75 AV	68.2	-13.45	-46.86	-48.51	4.09	-40.51

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

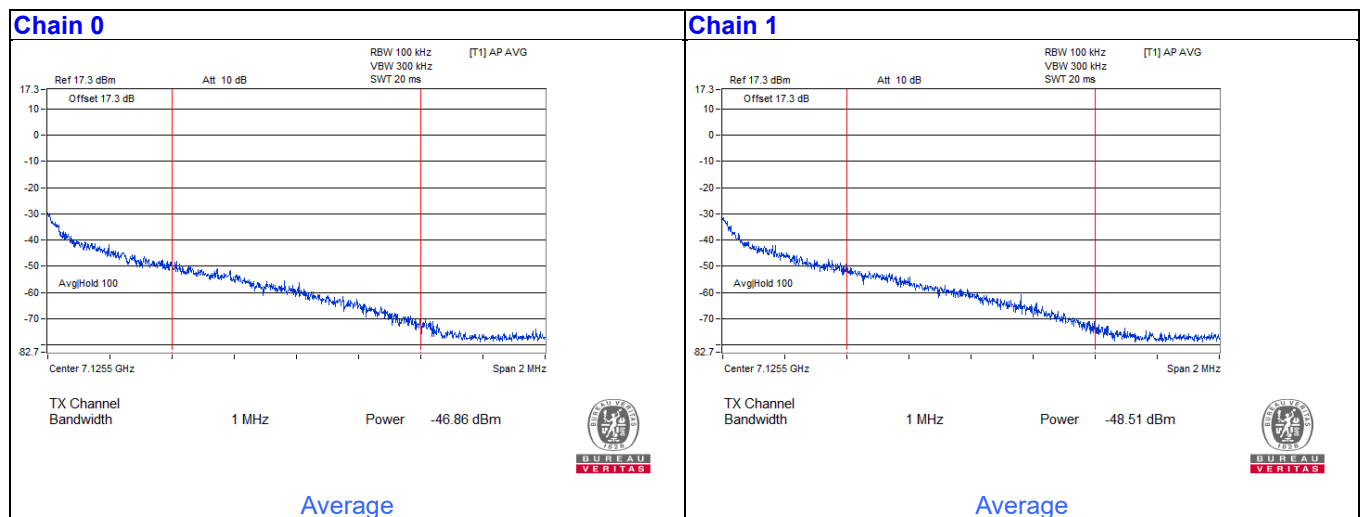


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5927.07	97.16 PK			-4.84	-7.24	4.76	1.9
2	*5927.07	87.68 AV			-15.49	-15.22	4.76	-7.58
3	#5924.98	87.85 PK	88.26	-0.41	-17.33	-13.75	4.76	-7.41
4	!5924.98	78.21 AV	68.26	9.95	-24.96	-24.68	4.76	-17.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

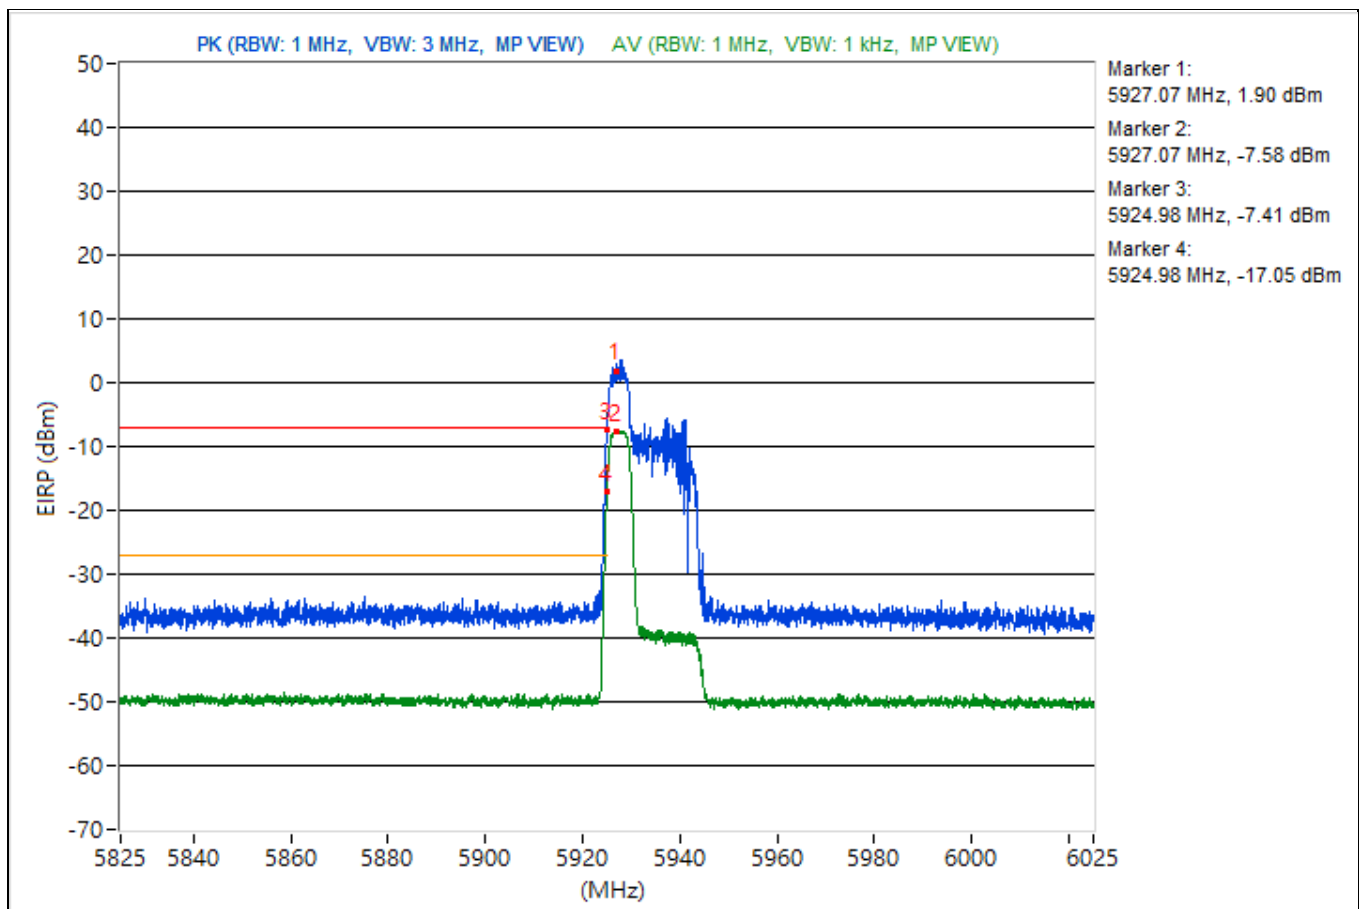


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	56.83 AV	68.2	-11.37	-45.87	-46.55	4.76	-38.43

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

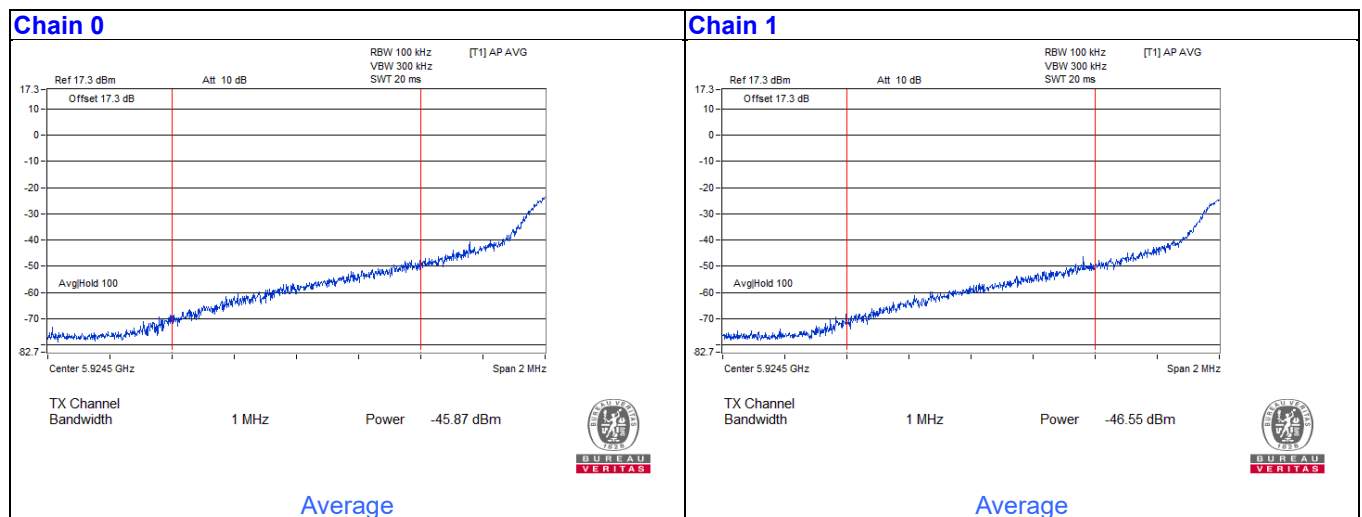


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5958.35	99.81 PK			-2.02	-4.88	4.76	4.55
2	*5958.35	91.65 AV			-11.25	-11.51	4.76	-3.61
3	#5919.6	50.82 PK	88.26	-37.44	-53.63	-51.14	4.76	-44.44
4	#5919.6	36.29 AV	68.26	-31.97	-65.85	-67.86	4.76	-58.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

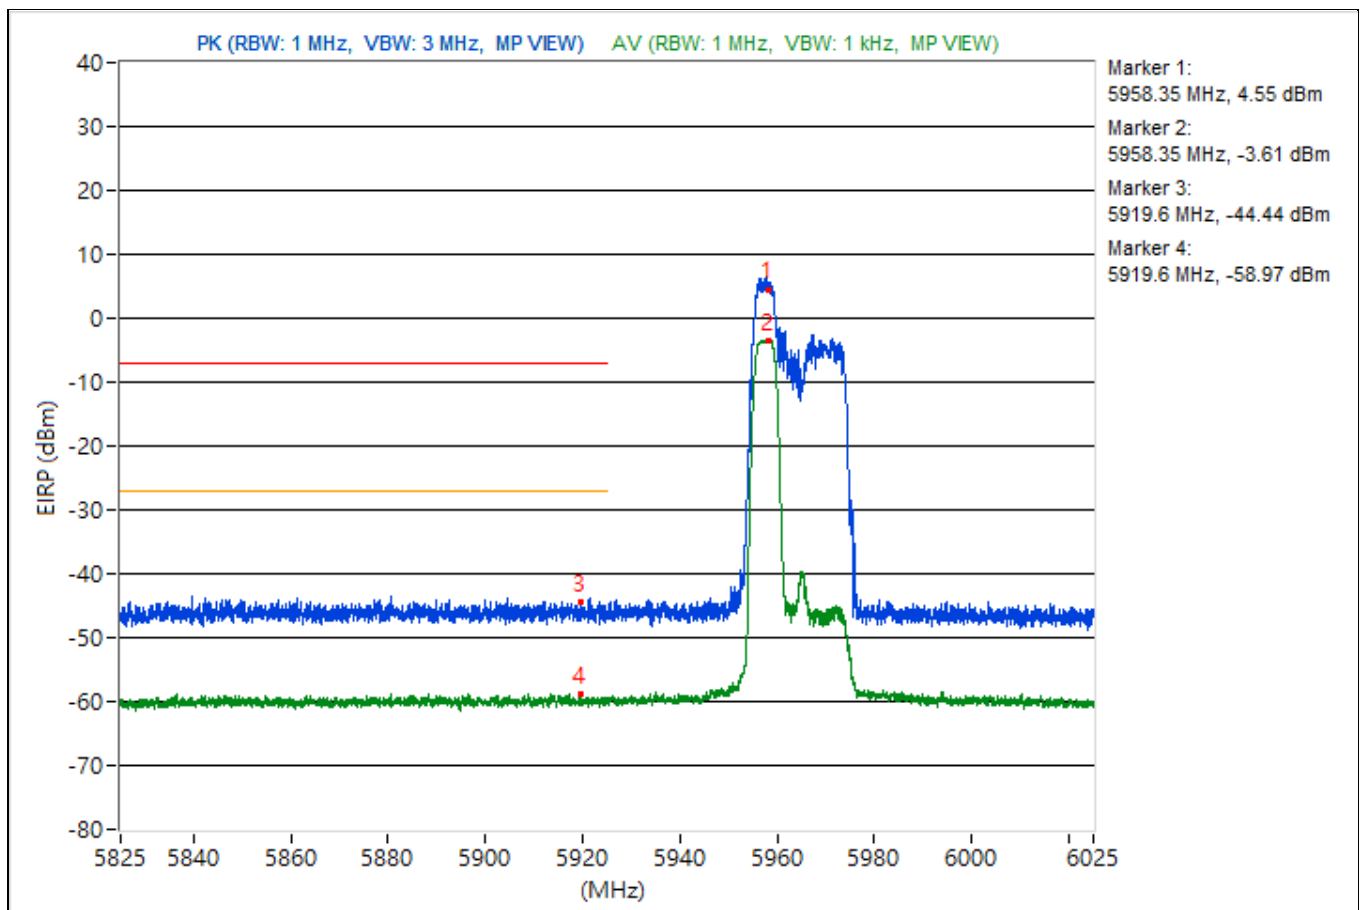


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7122.64	98.46 PK			-4.03	-3.78	4.09	3.2
2	*7122.64	89.53 AV			-12.18	-13.59	4.09	-5.73
3	#7125	88.04 PK	88.26	-0.22	-13.75	-14.97	4.09	-7.22
4	!#7125	79.59 AV	68.26	11.33	-22.19	-23.45	4.09	-15.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

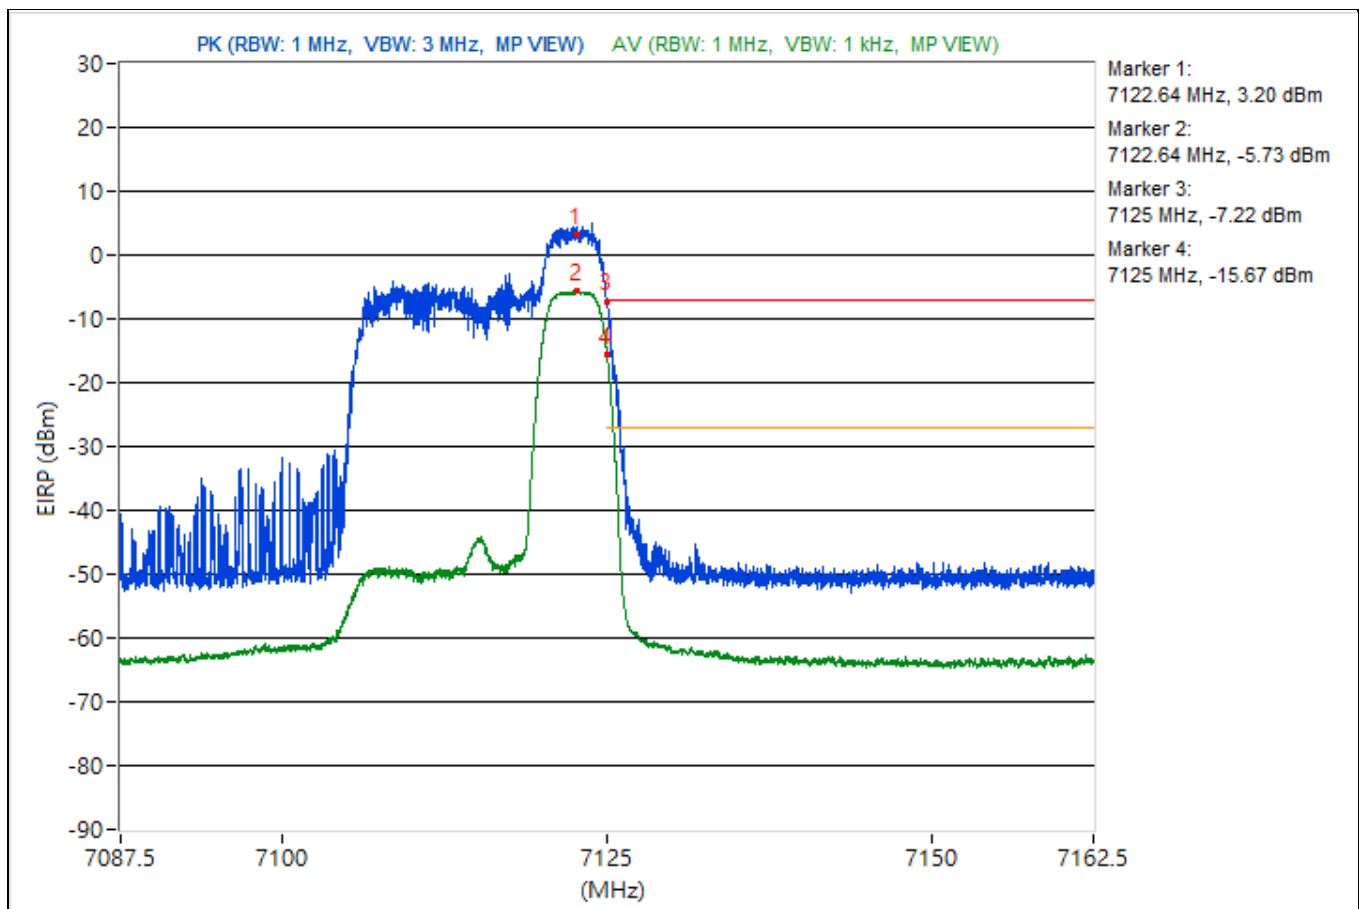


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	55.76 AV	68.2	-12.44	-45.92	-47.41	4.09	-39.50

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

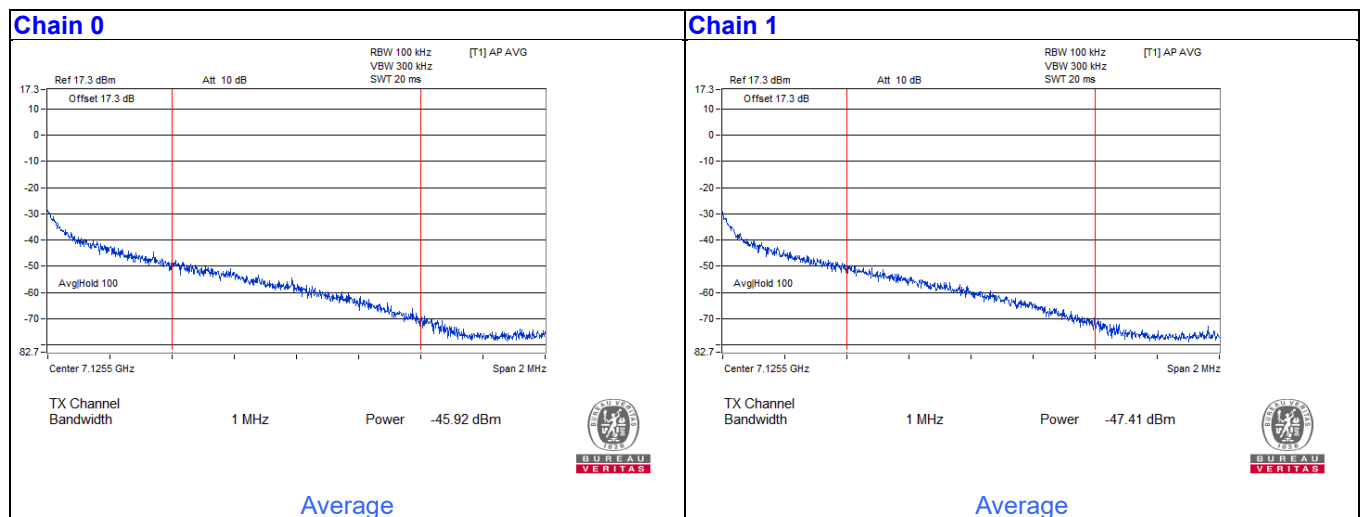


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5928.43	95.41 PK			-7.33	-7.93	4.76	0.15
2	*5928.43	87.73 AV			-14.87	-15.78	4.76	-7.53
3	#5924.98	88.1 PK	88.26	-0.16	-14.57	-15.32	4.76	-7.16
4	!#5924.98	78.94 AV	68.26	10.68	-23.84	-24.36	4.76	-16.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

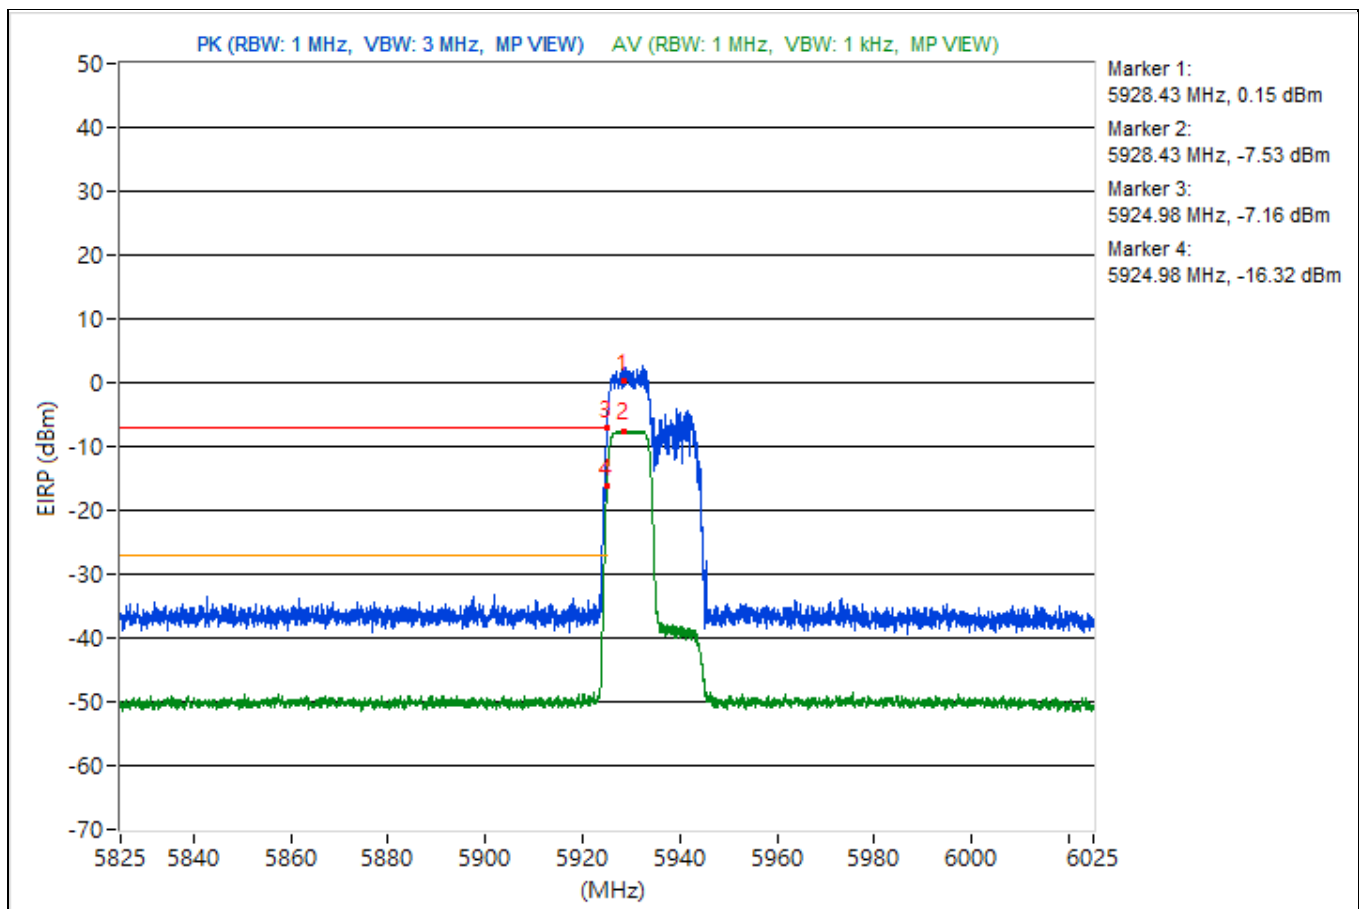


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	57.57 AV	68.2	-10.63	-45.29	-45.64	4.76	-37.69

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

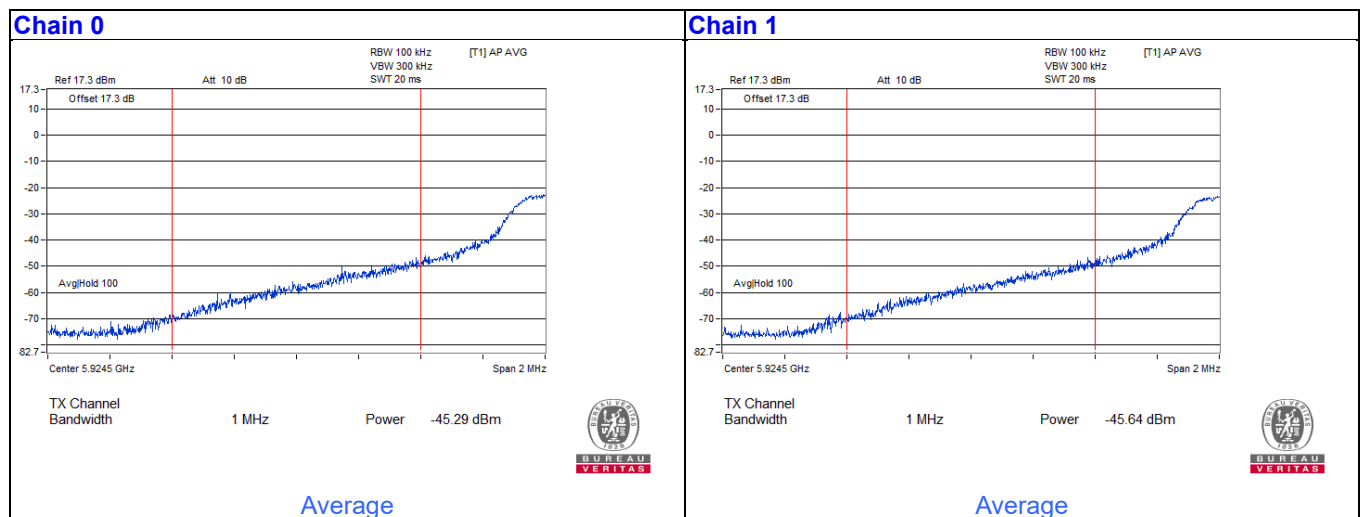


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.37	103.77 PK			0.29	1.16	4.76	8.51
2	*5948.37	94.12 AV			-8.42	-9.46	4.76	-1.14
3	#5923.32	50.15 PK	88.26	-38.11	-52.51	-53.29	4.76	-45.11
4	#5923.32	37.35 AV	68.26	-30.91	-65.11	-66.35	4.76	-57.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

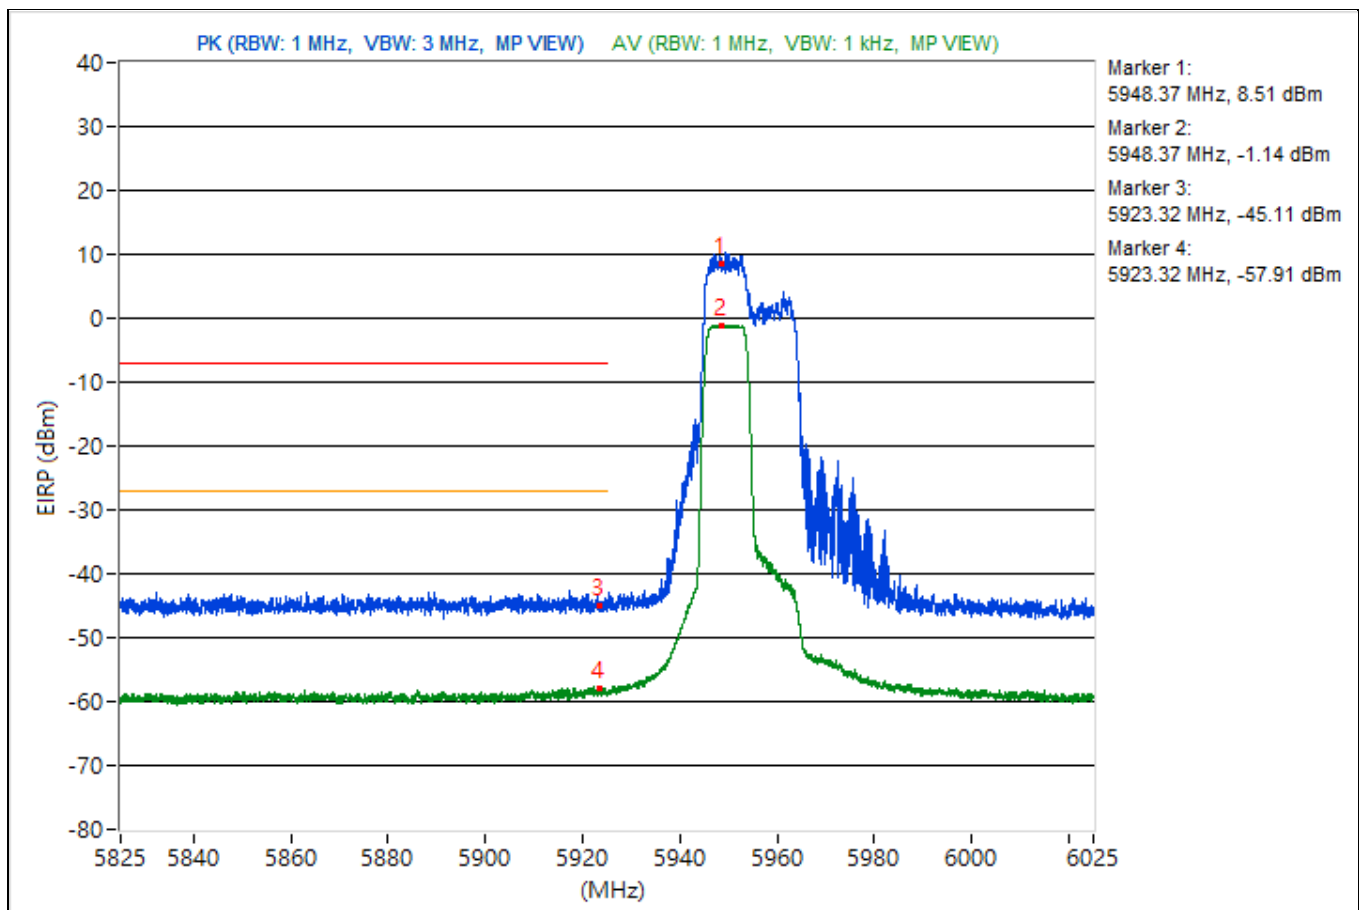


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7122.46	97.39 PK			-3.77	-6.62	4.09	2.13
2	*7122.46	88.6 AV			-13.16	-14.45	4.09	-6.66
3	#7125	87.69 PK	88.26	-0.57	-13.53	-16.22	4.09	-7.57
4	!#7125	79.42 AV	68.26	11.16	-22.39	-23.58	4.09	-15.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

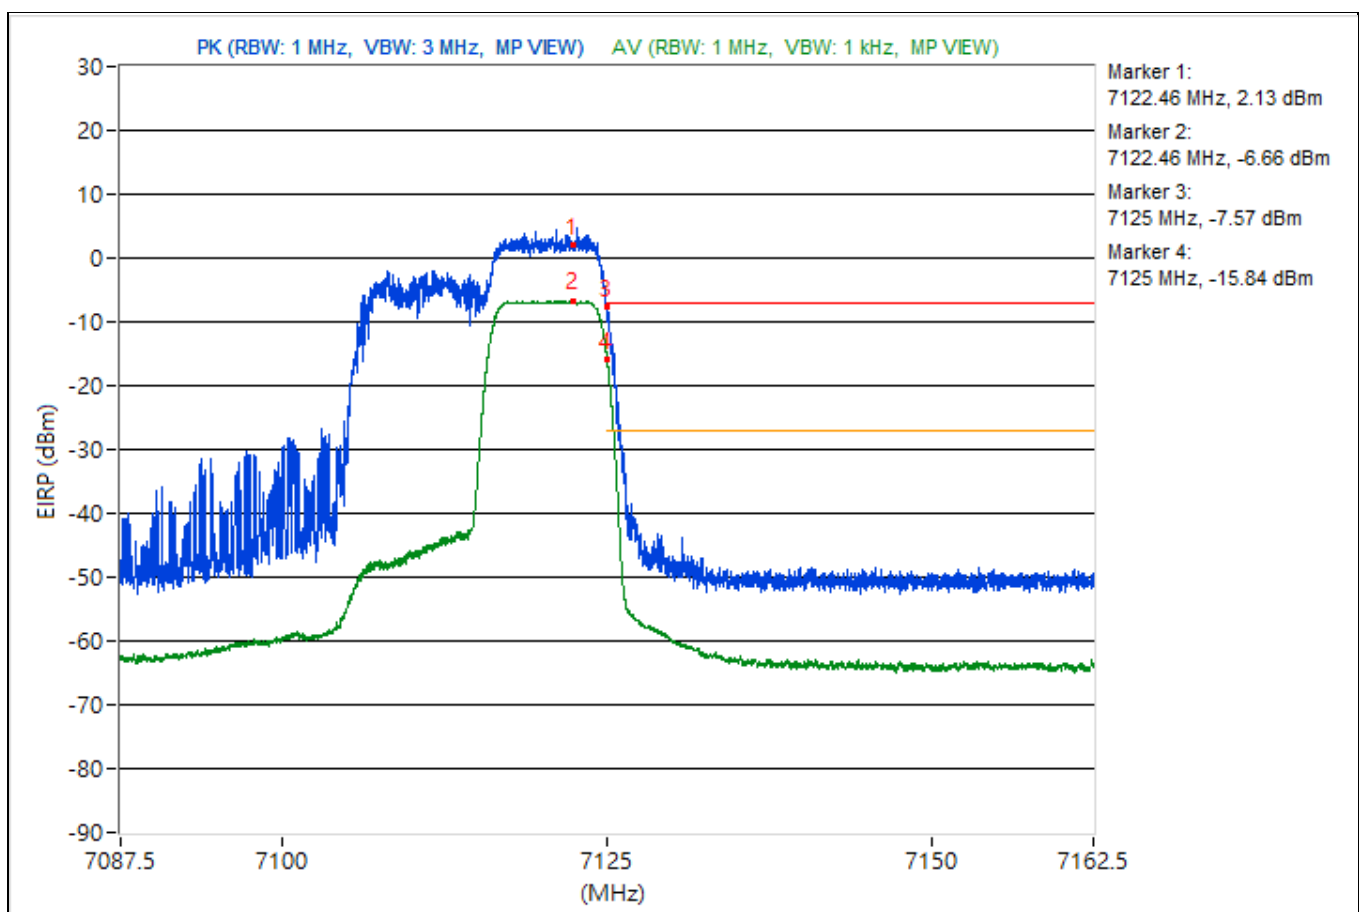


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	55.43 AV	68.2	-12.77	-46.53	-47.37	4.09	-39.83

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

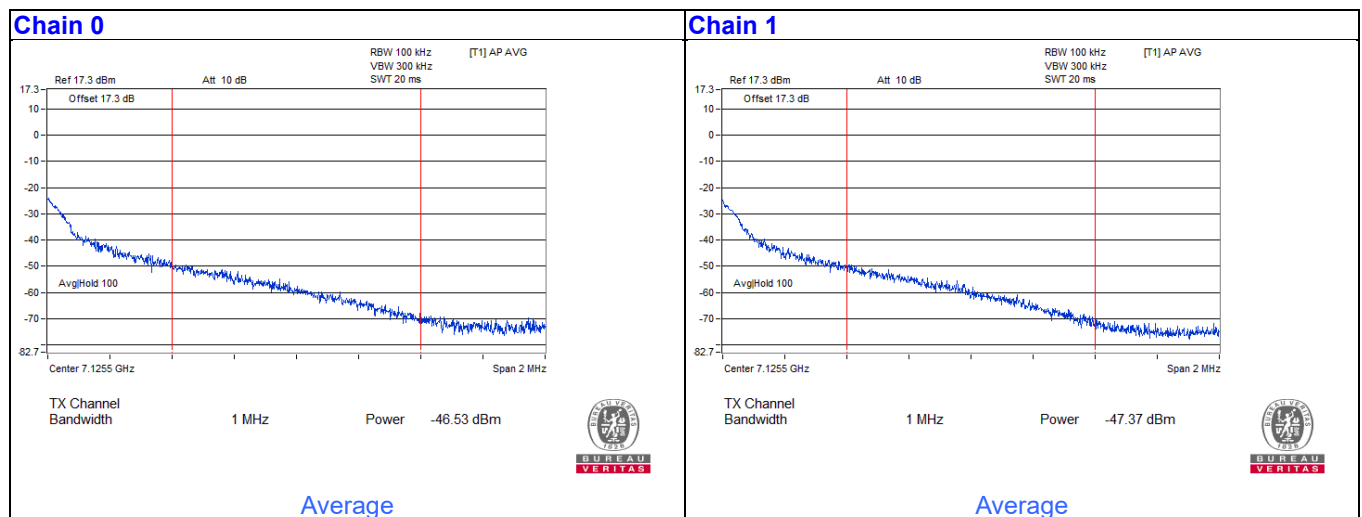

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5931.93	103.29 PK			-0.13	0.62	4.76	8.03
2	*5931.93	94.15 AV			-8.66	-9.11	4.76	-1.11
3	#5924.98	79.41 PK	88.26	-8.85	-24.01	-23.28	4.76	-15.85
4	#5924.98	48.25 AV	68.26	-20.01	-54.63	-54.93	4.76	-47.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

