


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5950.75	102.27 PK			-1.23	-0.34	4.76	7.01
2	*5950.75	94.2 AV			-8.4	-9.3	4.76	-1.06
3	#5920.52	50.92 PK	88.26	-37.34	-53.3	-51.18	4.76	-44.34
4	#5920.52	37.42 AV	68.26	-30.84	-66.02	-65.24	4.76	-57.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

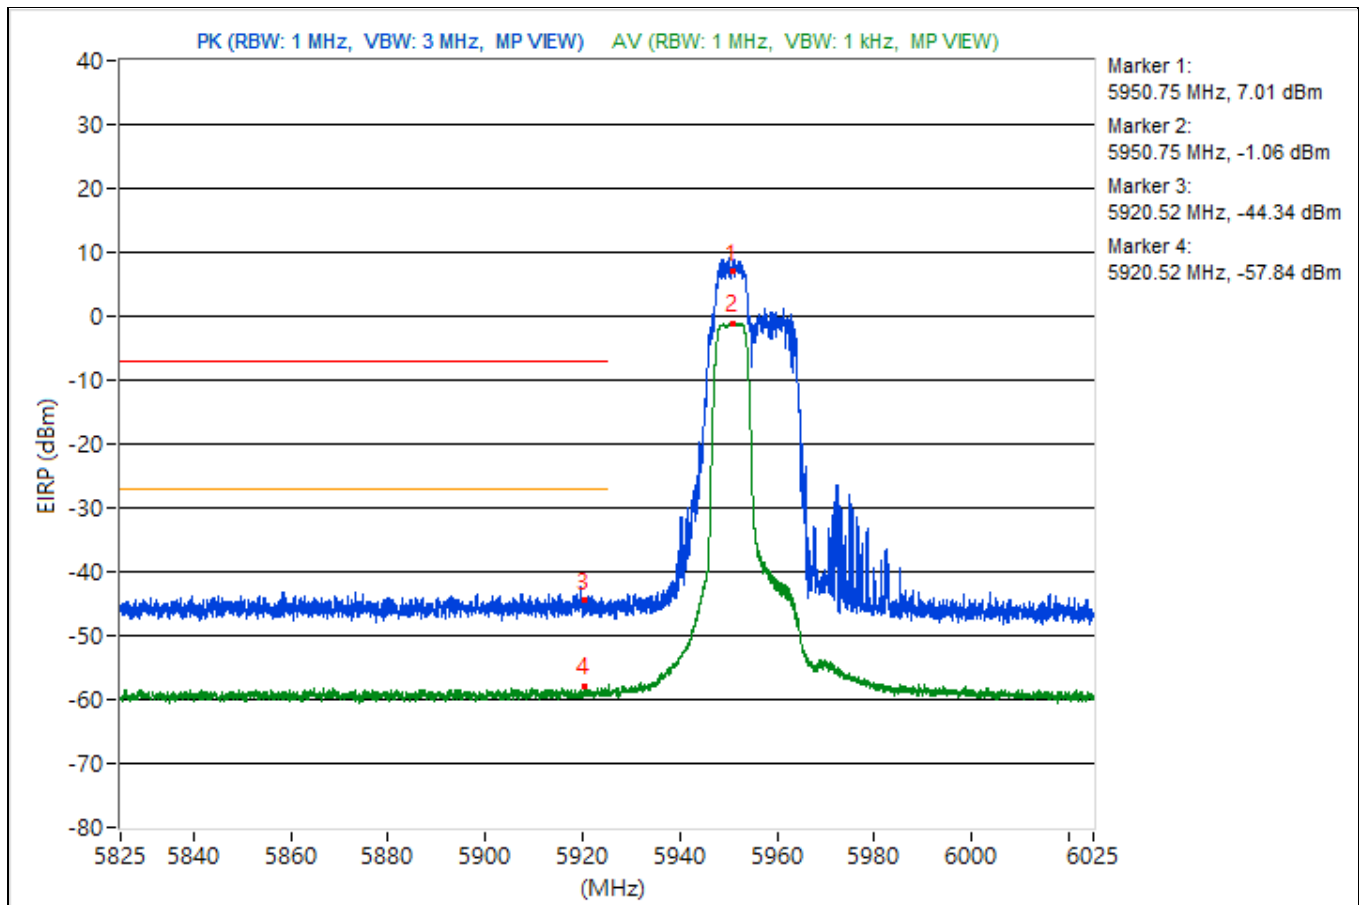


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7118.32	103.49 PK			1.76	0.4	4.09	8.23
2	*7118.32	94.55 AV			-7.16	-8.56	4.09	-0.71
3	#7125.02	76.69 PK	88.26	-11.57	-24.09	-28.18	4.09	-18.57
4	#7125.02	48.08 AV	68.26	-20.18	-53.16	-55.78	4.09	-47.18

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

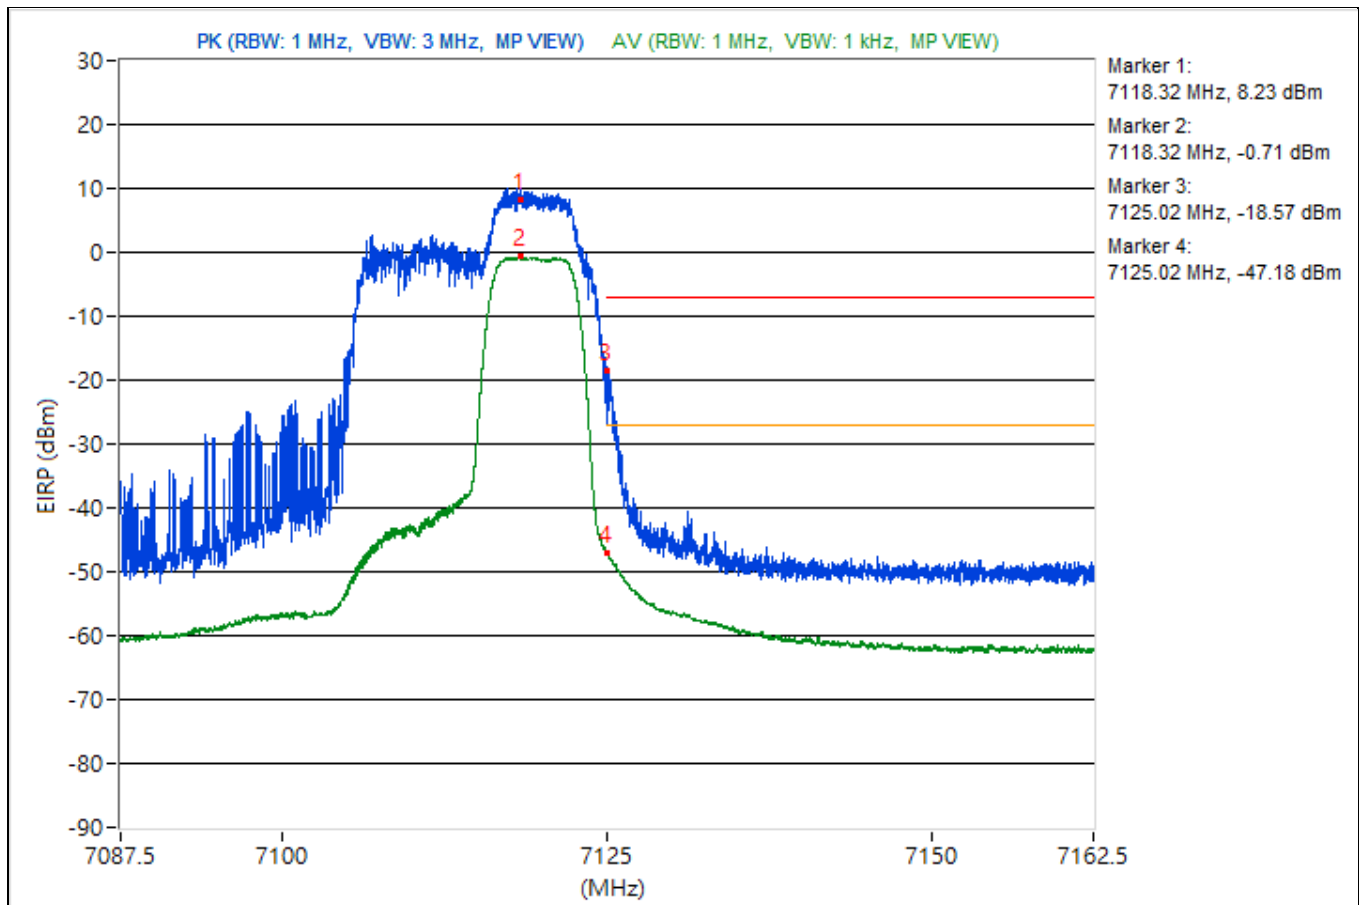


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.8	100.88 PK			-2.53	-1.81	4.76	5.62
2	*5933.8	92.18 AV			-10.8	-10.9	4.76	-3.08
3	#5924.98	87.44 PK	88.26	-0.82	-15.69	-15.48	4.76	-7.82
4	!#5924.98	79.67 AV	68.26	11.41	-23.44	-23.27	4.76	-15.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

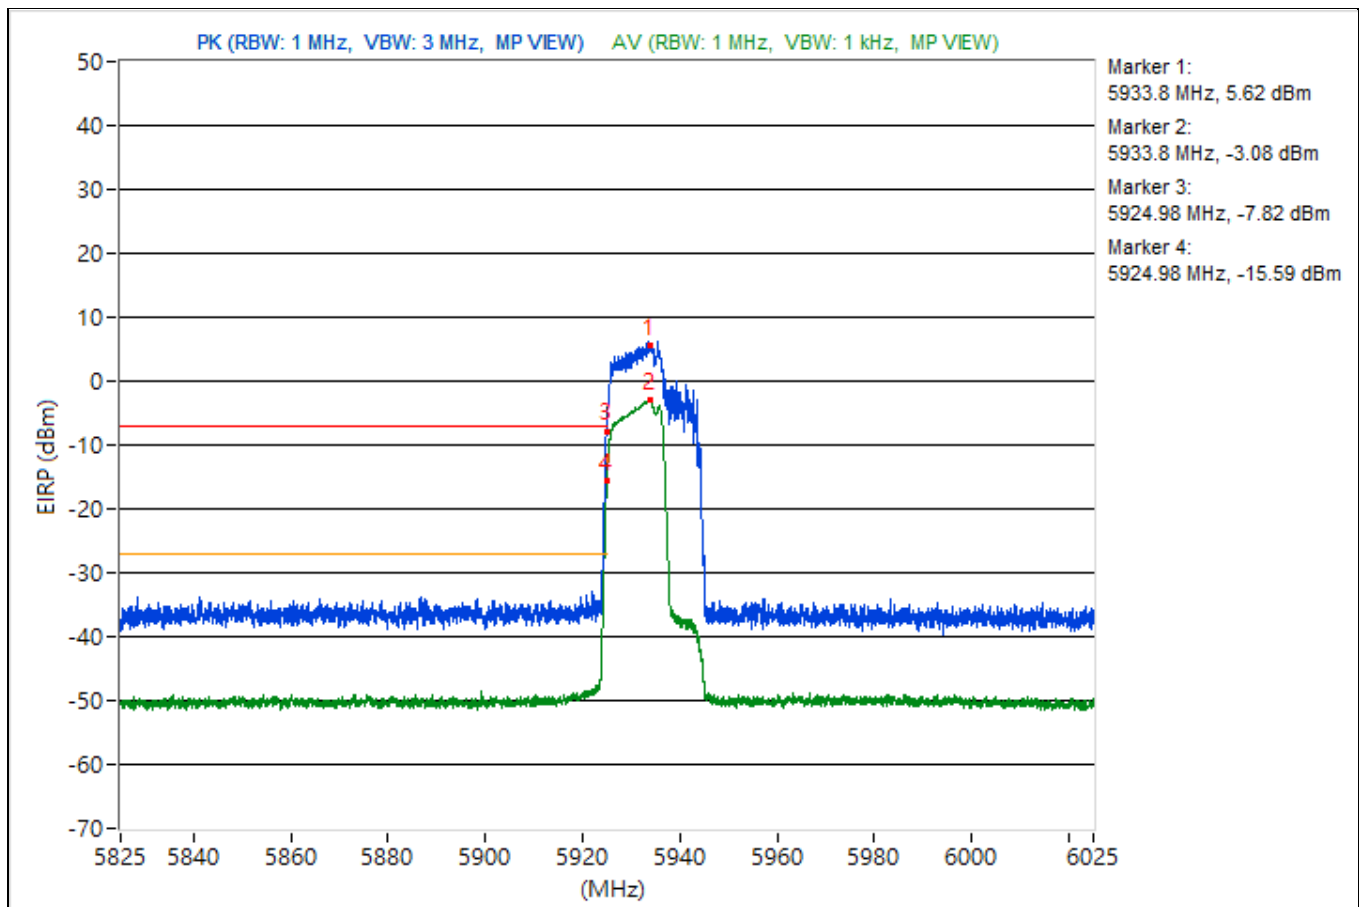


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	49.25 AV	68.2	-18.95	-53.65	-53.91	4.76	-46.01

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

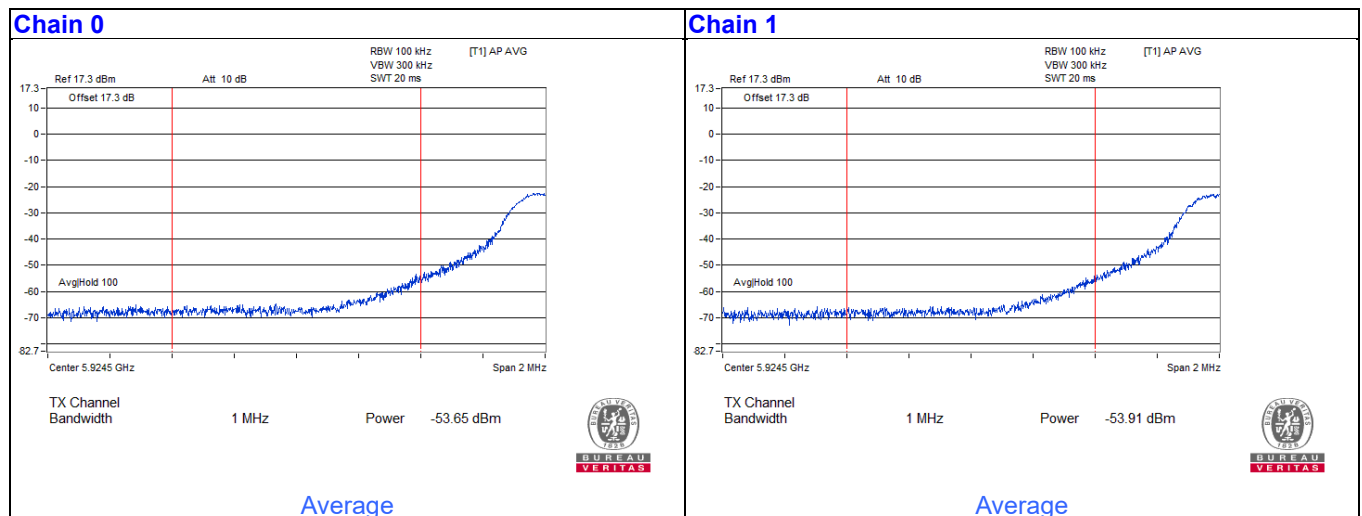


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.75	102.66 PK			-0.37	-0.38	4.76	7.4
2	*5953.75	93.33 AV			-9.49	-9.93	4.76	-1.93
3	#5920.6	49.56 PK	88.26	-38.7	-52.88	-54.15	4.76	-45.7
4	#5920.6	37.33 AV	68.26	-30.93	-65.06	-66.44	4.76	-57.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

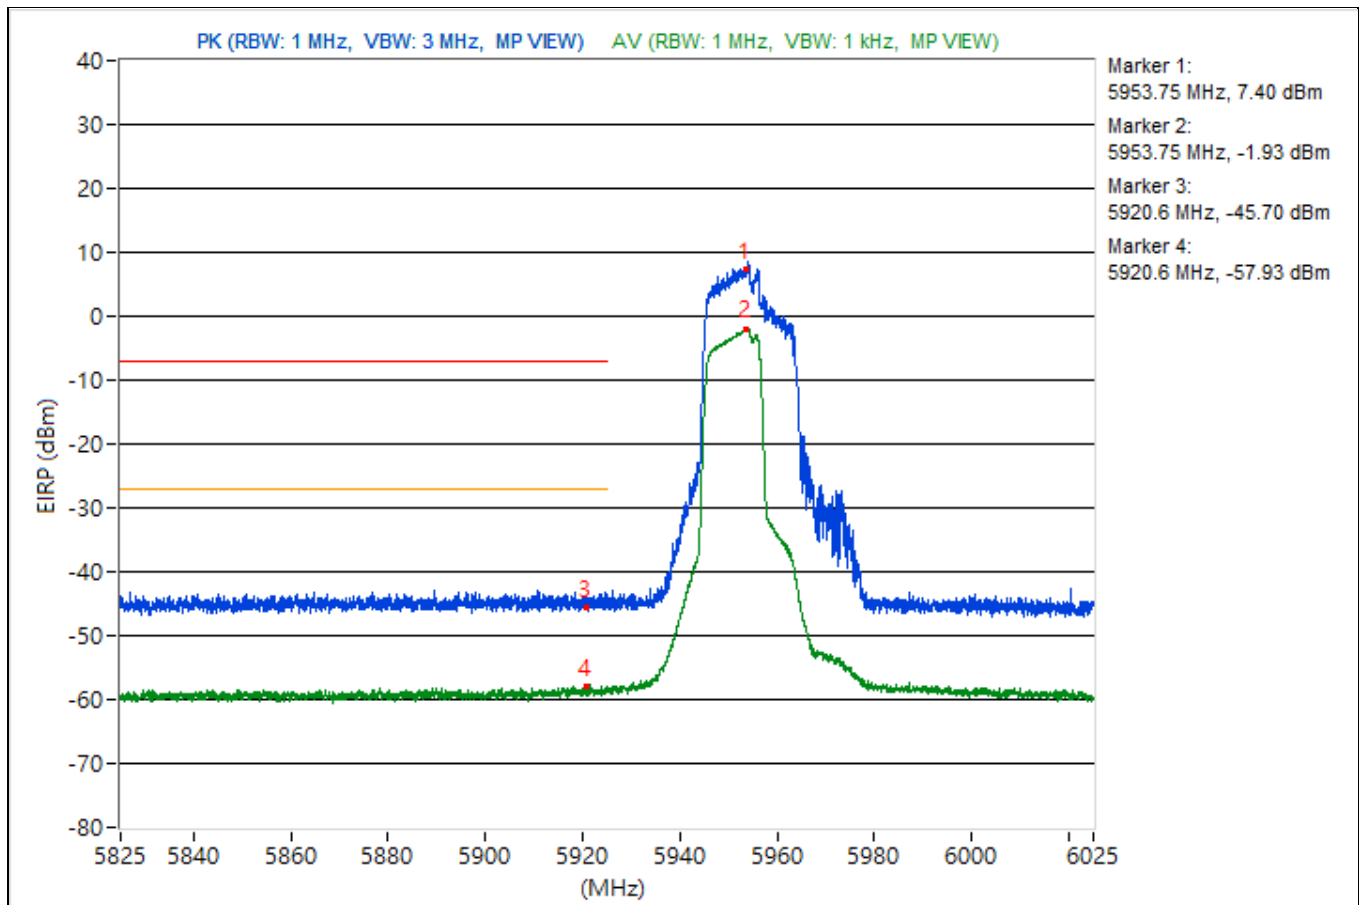


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.16	101.6 PK			-0.84	-0.67	4.09	6.34
2	*7116.16	92.59 AV			-9.2	-10.43	4.09	-2.67
3	#7125	88.2 PK	88.26	-0.06	-14.08	-14.23	4.09	-7.06
4	!#7125	80.27 AV	68.26	12.01	-21.54	-22.71	4.09	-14.99

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

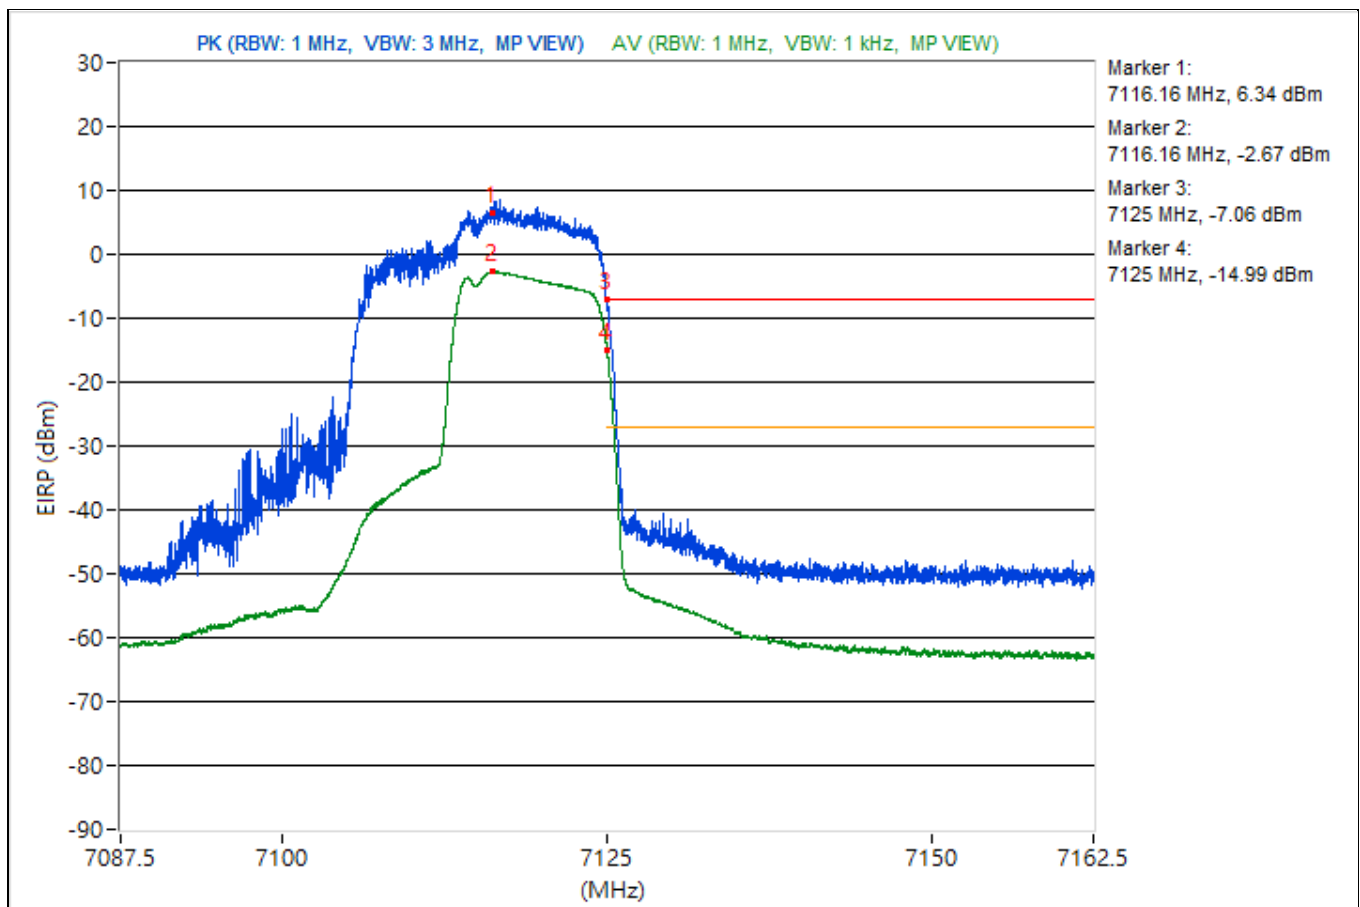


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	46.31 AV	68.2	-21.89	-55.59	-56.57	4.09	-48.95

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

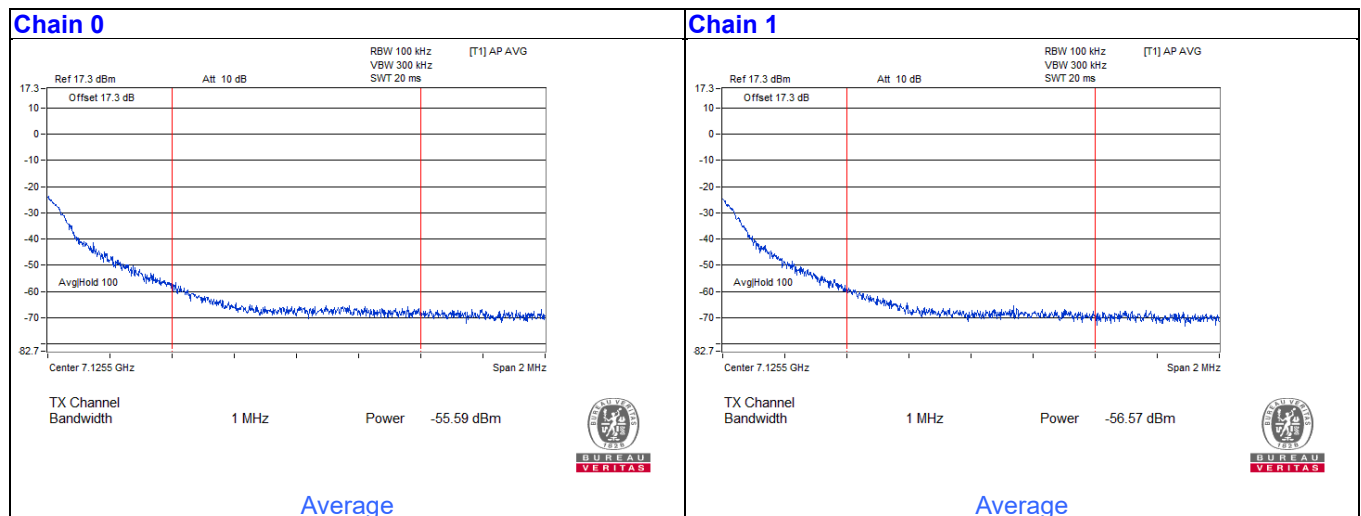


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.93	101.45 PK			-1.38	-1.79	4.76	6.19
2	*5982.93	94 AV			-8.97	-9.09	4.76	-1.26
3	#5924.73	53.84 PK	88.26	-34.42	-50.33	-48.28	4.76	-41.42
4	#5924.73	45.07 AV	68.26	-23.19	-58.06	-57.86	4.76	-50.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

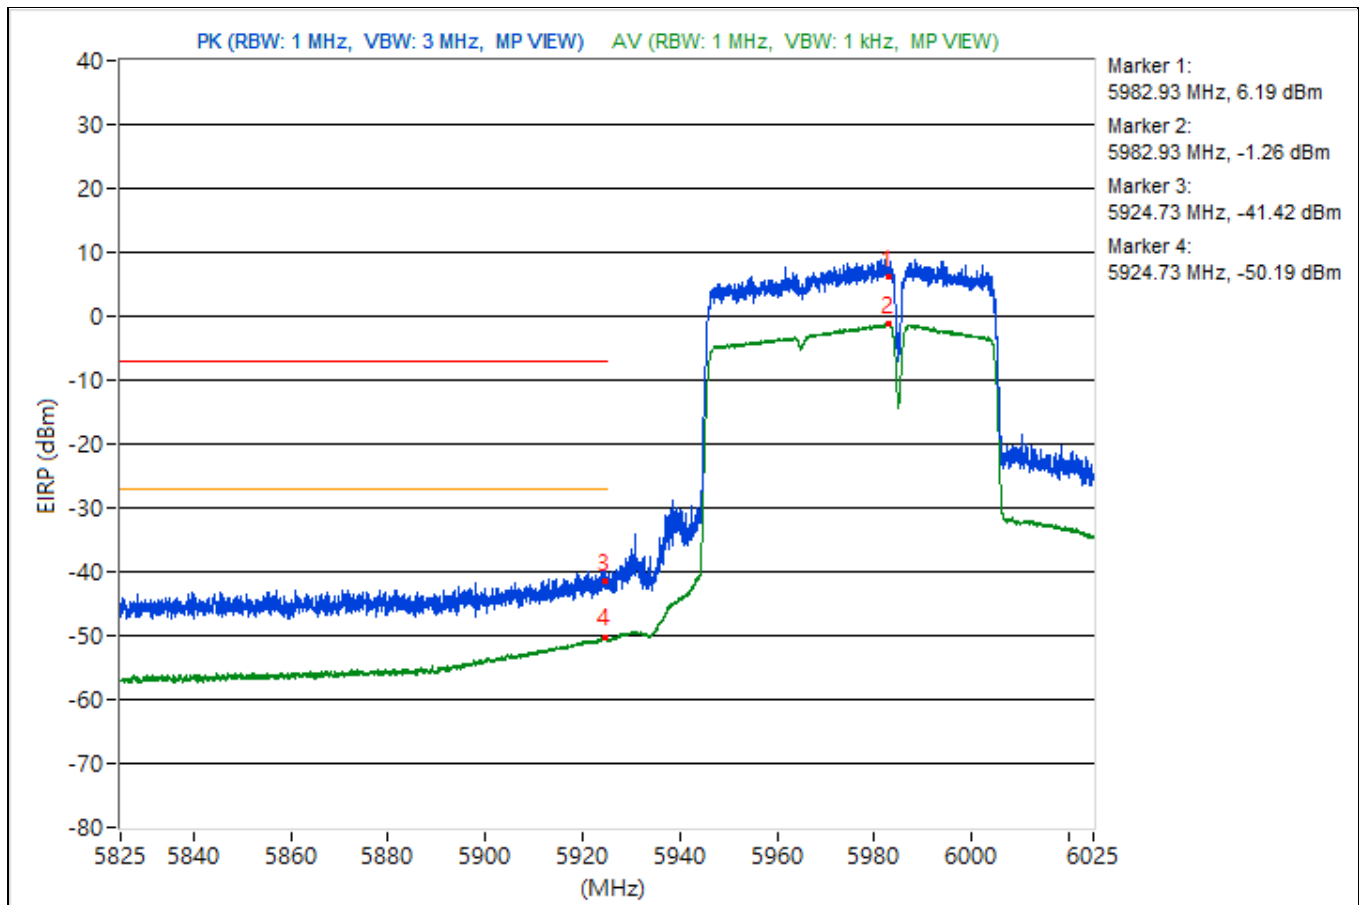


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	6.975 GHz ~ 7.275 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7027.61	101.51 PK			-0.52	-1.2	4.09	6.25
2	*7027.61	93.47 AV			-9.1	-8.69	4.09	-1.79
3	#7126.24	45.94 PK	88.26	-42.32	-55.69	-57.31	4.09	-49.32
4	#7126.24	37.34 AV	68.26	-30.92	-65.14	-64.9	4.09	-57.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

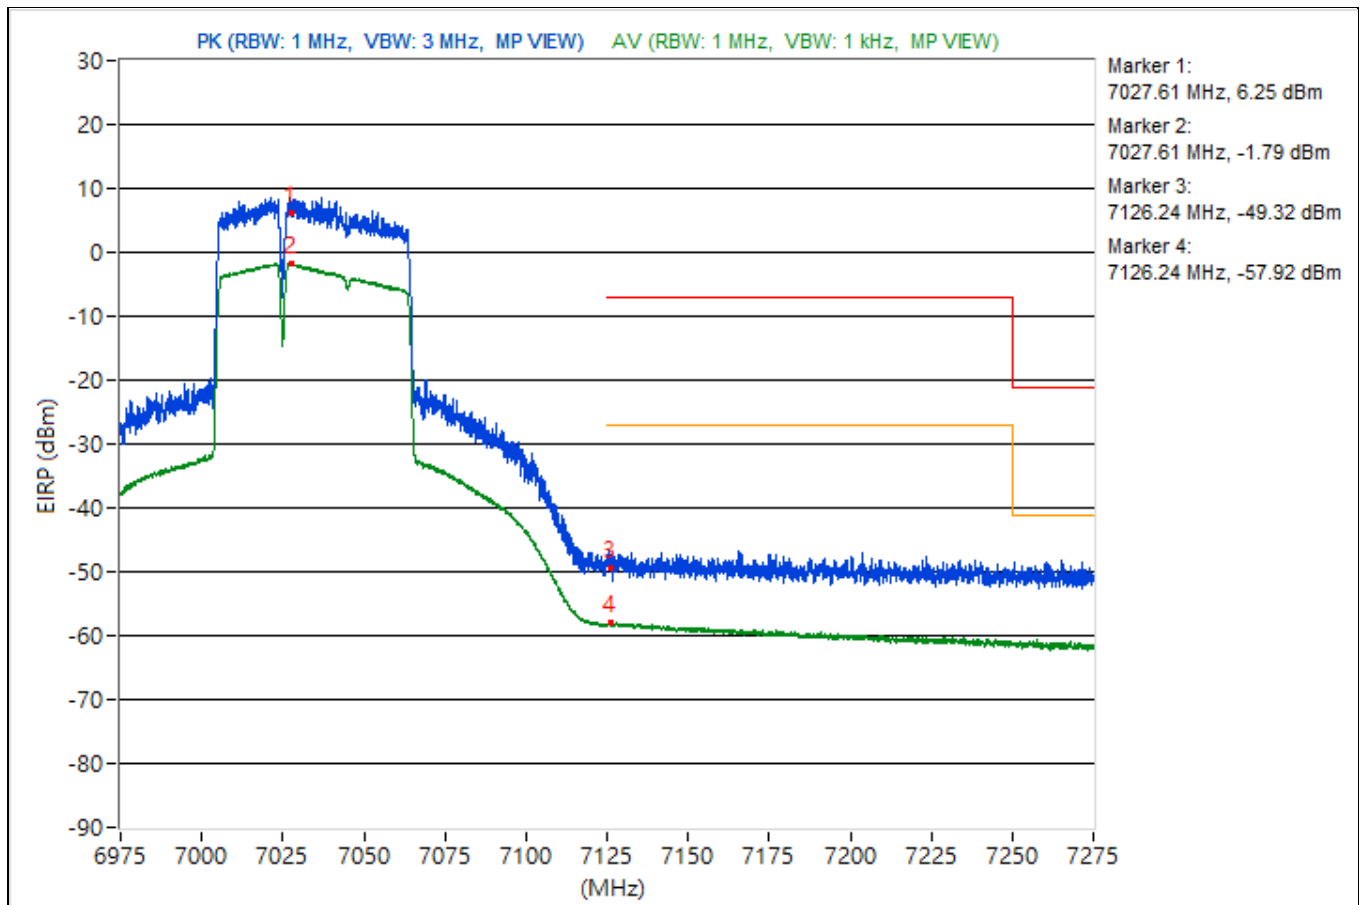


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.775 GHz ~ 6.075 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6021.71	100.85 PK			-1.72	-2.7	4.76	5.59
2	*6021.71	93.98 AV			-9.04	-9.05	4.76	-1.28
3	#5917.99	56.75 PK	88.26	-31.51	-48.9	-44.67	4.76	-38.51
4	#5917.99	47.77 AV	68.26	-20.49	-54.86	-55.7	4.76	-47.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

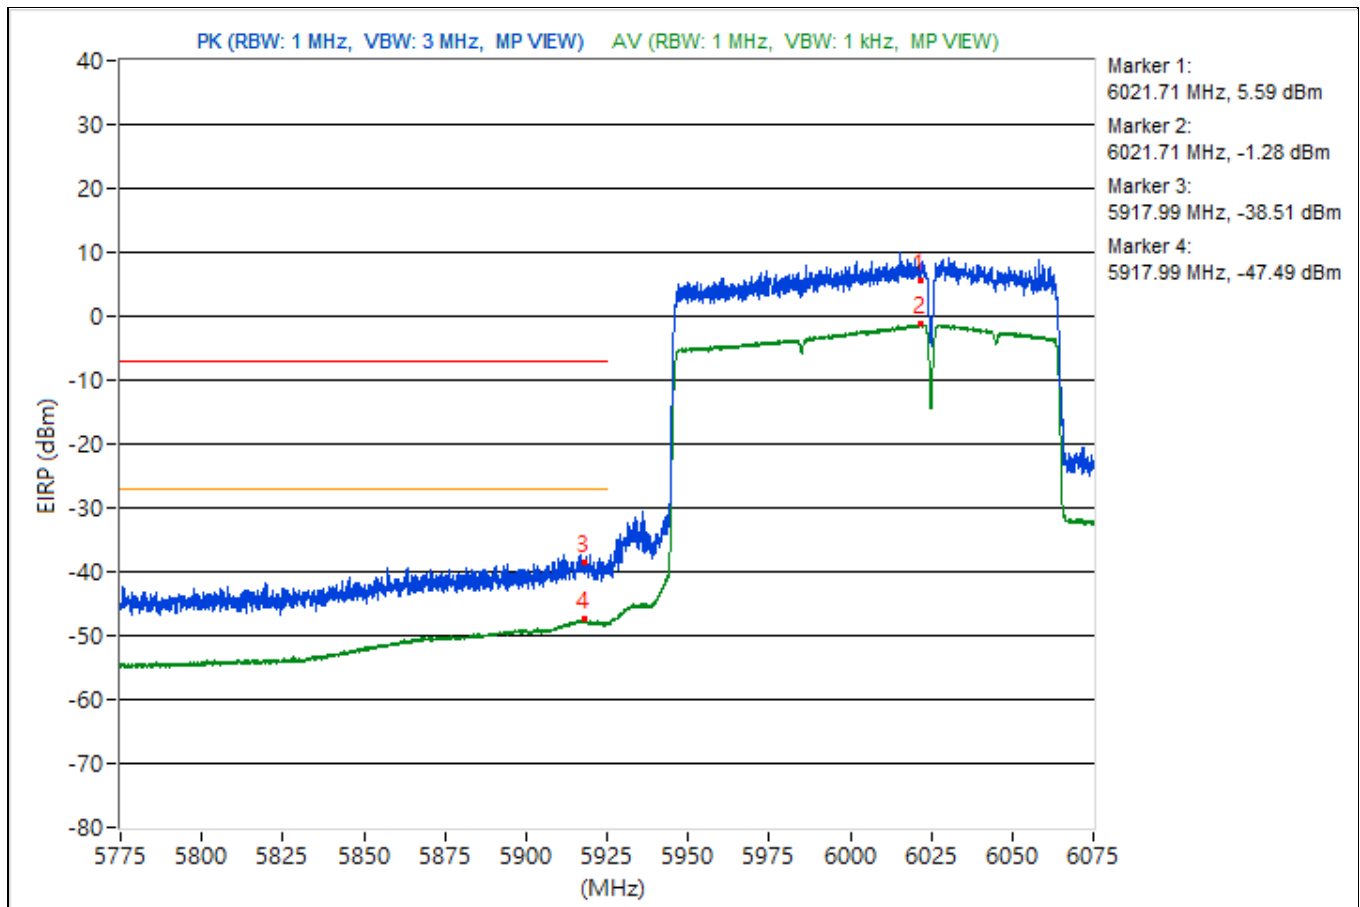


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6982.62	104.18 PK			2.1	1.51	4.09	8.92
2	*6982.62	95.25 AV			-7.08	-7.14	4.09	-0.01
3	#7125	63.13 PK	88.26	-25.13	-39.89	-38.65	4.09	-32.13
4	#7125	53.36 AV	68.26	-14.9	-49.19	-48.83	4.09	-41.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

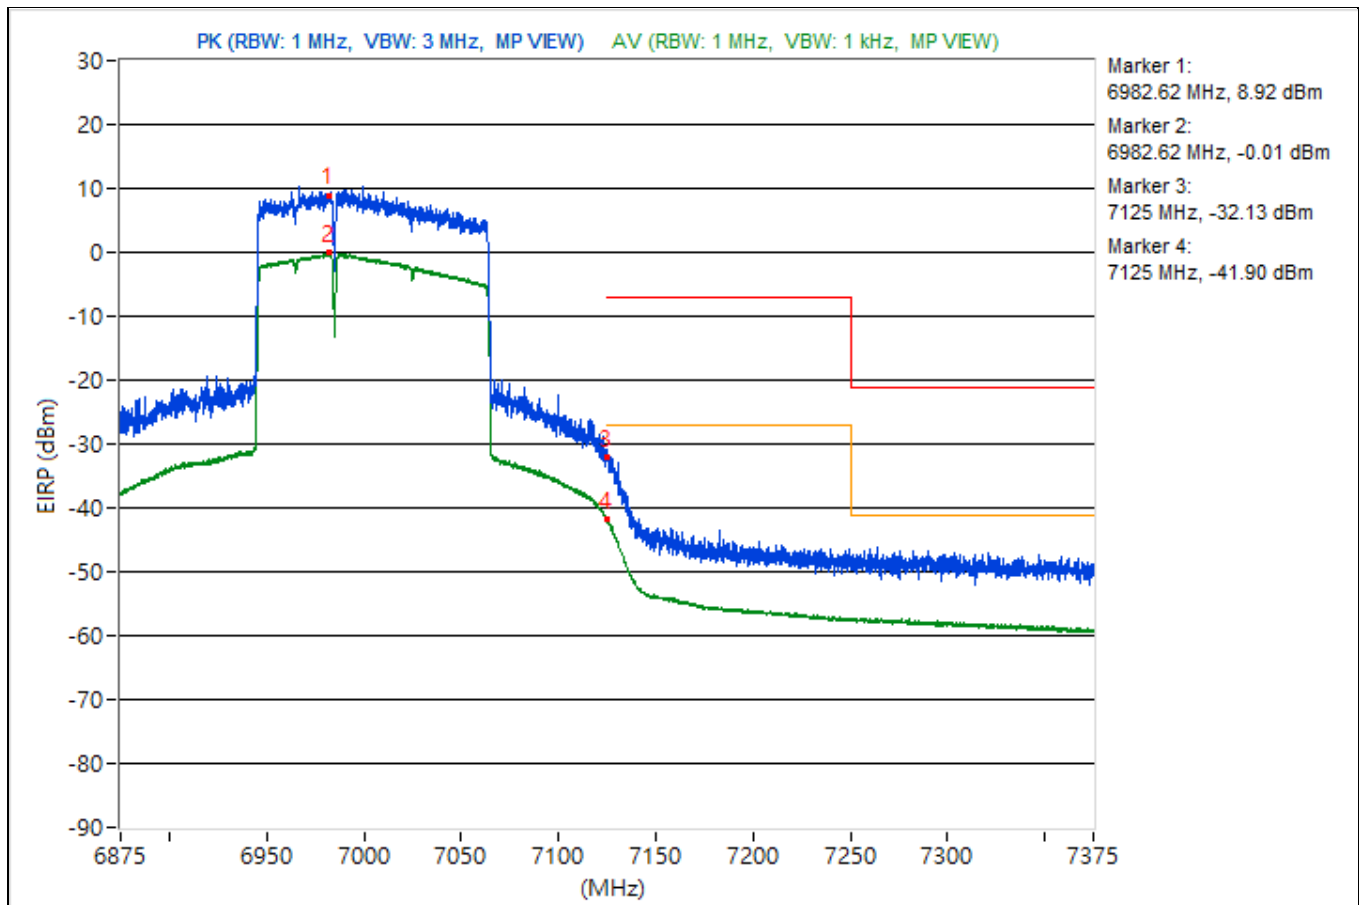


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6028.2	102.49 PK			-0.21	-0.89	4.76	7.23
2	*6028.2	93.89 AV			-8.82	-9.48	4.76	-1.37
3	#5924.55	60.15 PK	88.26	-28.11	-42.93	-42.82	4.76	-35.11
4	#5924.55	51.87 AV	68.26	-16.39	-50.75	-51.61	4.76	-43.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

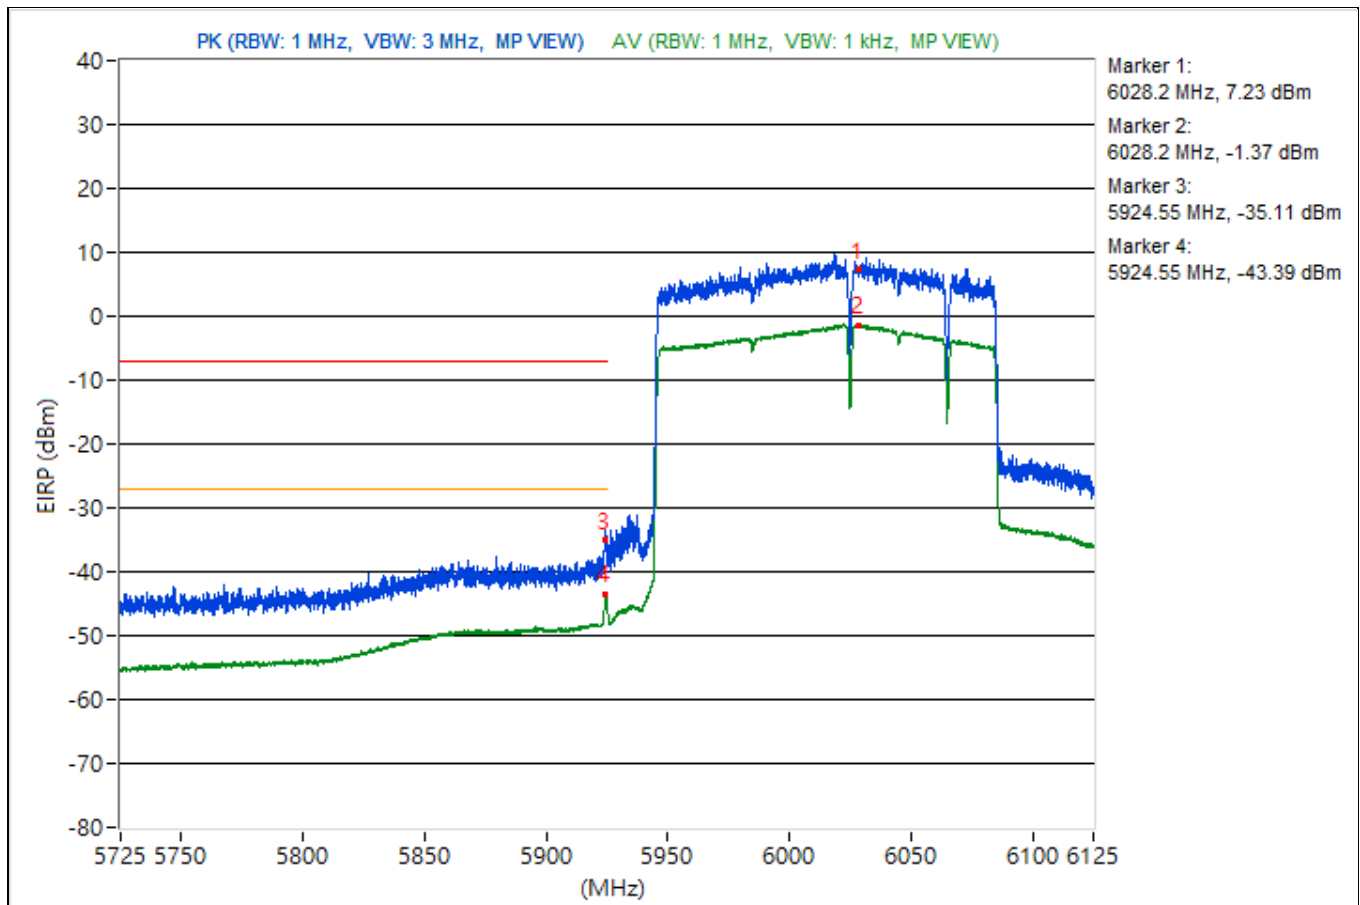


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6987.44	101.1 PK			-0.9	-1.66	4.09	5.84
2	*6987.44	93.53 AV			-8.41	-9.29	4.09	-1.73
3	#7125.12	64.38 PK	88.26	-23.88	-38.53	-37.5	4.09	-30.88
4	#7125.12	53.71 AV	68.26	-14.55	-48.65	-48.65	4.09	-41.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

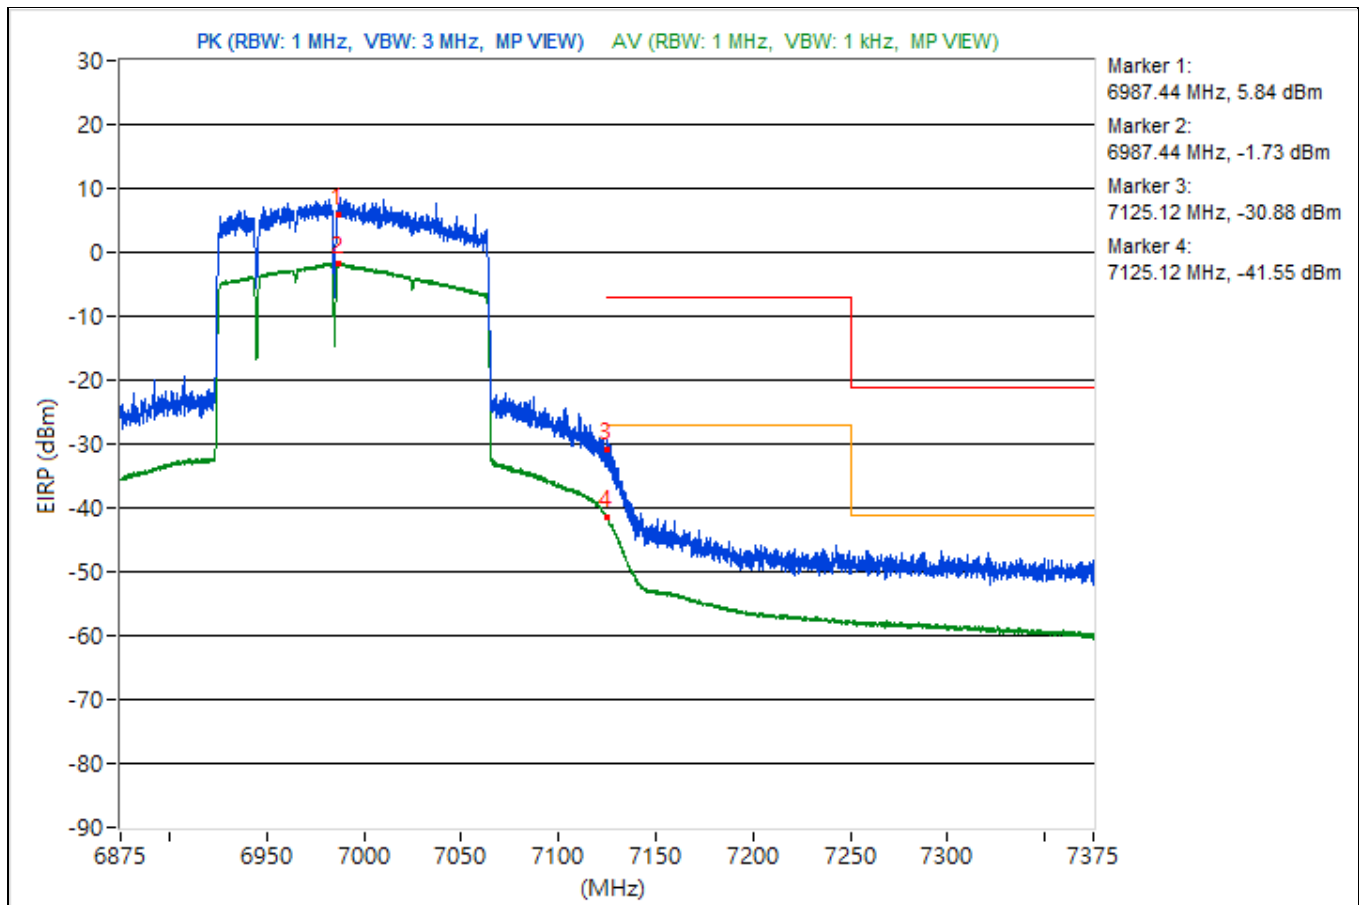

under control of a low-power indoor AP
Mode B
1TX

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.7 PK	74.0	-27.3	2.17 H	209	35.1	11.6
2	11870.00	36.1 AV	54.0	-17.9	2.17 H	209	24.5	11.6
3	17805.00	54.3 PK	74.0	-19.7	3.20 H	149	32.5	21.8
4	17805.00	42.2 AV	54.0	-11.8	3.20 H	149	20.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.9 PK	74.0	-26.1	2.19 V	102	36.3	11.6
2	11870.00	36.8 AV	54.0	-17.2	2.19 V	102	25.2	11.6
3	17805.00	53.9 PK	74.0	-20.1	1.89 V	308	32.1	21.8
4	17805.00	41.1 AV	54.0	-12.9	1.89 V	308	19.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.3 PK	74.0	-27.7	2.14 H	222	34.8	11.5
2	11910.00	35.7 AV	54.0	-18.3	2.14 H	222	24.2	11.5
3	17865.00	53.9 PK	74.0	-20.1	3.14 H	147	30.7	23.2
4	17865.00	42.1 AV	54.0	-11.9	3.14 H	147	18.9	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.0 PK	74.0	-26.0	2.15 V	112	36.5	11.5
2	11910.00	36.8 AV	54.0	-17.2	2.15 V	112	25.3	11.5
3	17865.00	54.0 PK	74.0	-20.0	1.89 V	305	30.8	23.2
4	17865.00	41.0 AV	54.0	-13.0	1.89 V	305	17.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	45.9 PK	74.0	-28.1	2.11 H	207	33.8	12.1
2	12350.00	35.2 AV	54.0	-18.8	2.11 H	207	23.1	12.1
3	18525.00	54.4 PK	74.0	-19.6	3.15 H	154	59.4	-5.0
4	18525.00	42.4 AV	54.0	-11.6	3.15 H	154	47.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.5 PK	74.0	-26.5	2.17 V	97	35.4	12.1
2	12350.00	36.3 AV	54.0	-17.7	2.17 V	97	24.2	12.1
3	18525.00	54.2 PK	74.0	-19.8	1.87 V	316	59.2	-5.0
4	18525.00	41.2 AV	54.0	-12.8	1.87 V	316	46.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.9 PK	88.2	-42.3	2.09 H	229	34.0	11.9
2	#12830.00	35.3 AV	68.2	-32.9	2.09 H	229	23.4	11.9
3	19245.00	53.9 PK	74.0	-20.1	3.18 H	156	57.7	-3.8
4	19245.00	41.9 AV	54.0	-12.1	3.18 H	156	45.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.3 PK	88.2	-40.9	2.18 V	122	35.4	11.9
2	#12830.00	36.3 AV	68.2	-31.9	2.18 V	122	24.4	11.9
3	19245.00	53.8 PK	74.0	-20.2	1.84 V	313	57.6	-3.8
4	19245.00	40.8 AV	54.0	-13.2	1.84 V	313	44.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.9 PK	88.2	-42.3	2.13 H	236	33.8	12.1
2	#12870.00	35.4 AV	68.2	-32.8	2.13 H	236	23.3	12.1
3	19305.00	53.2 PK	74.0	-20.8	3.13 H	148	56.9	-3.7
4	19305.00	41.7 AV	54.0	-12.3	3.13 H	148	45.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.8 PK	88.2	-40.4	2.15 V	109	35.7	12.1
2	#12870.00	36.9 AV	68.2	-31.3	2.15 V	109	24.8	12.1
3	19305.00	54.2 PK	74.0	-19.8	1.84 V	320	57.9	-3.7
4	19305.00	41.3 AV	54.0	-12.7	1.84 V	320	45.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.3 PK	88.2	-41.9	2.15 H	224	34.2	12.1
2	#12950.00	35.6 AV	68.2	-32.6	2.15 H	224	23.5	12.1
3	19425.00	53.7 PK	74.0	-20.3	3.15 H	137	57.5	-3.8
4	19425.00	41.8 AV	54.0	-12.2	3.15 H	137	45.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.2 PK	88.2	-40.0	2.12 V	107	36.1	12.1
2	#12950.00	36.7 AV	68.2	-31.5	2.12 V	107	24.6	12.1
3	19425.00	54.1 PK	74.0	-19.9	1.92 V	298	57.9	-3.8
4	19425.00	41.2 AV	54.0	-12.8	1.92 V	298	45.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.5 PK	88.2	-41.7	2.19 H	208	34.4	12.1
2	#13030.00	36.0 AV	68.2	-32.2	2.19 H	208	23.9	12.1
3	19545.00	54.3 PK	74.0	-19.7	3.09 H	140	58.4	-4.1
4	19545.00	42.5 AV	54.0	-11.5	3.09 H	140	46.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.4 PK	88.2	-39.8	2.18 V	107	36.3	12.1
2	#13030.00	36.8 AV	68.2	-31.4	2.18 V	107	24.7	12.1
3	19545.00	53.8 PK	74.0	-20.2	1.87 V	295	57.9	-4.1
4	19545.00	40.9 AV	54.0	-13.1	1.87 V	295	45.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.0 PK	88.2	-42.2	2.11 H	236	33.6	12.4
2	#13070.00	35.5 AV	68.2	-32.7	2.11 H	236	23.1	12.4
3	19605.00	53.9 PK	74.0	-20.1	3.19 H	152	57.9	-4.0
4	19605.00	42.2 AV	54.0	-11.8	3.19 H	152	46.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.0 PK	88.2	-40.2	2.16 V	112	35.6	12.4
2	#13070.00	36.8 AV	68.2	-31.4	2.16 V	112	24.4	12.4
3	19605.00	54.3 PK	74.0	-19.7	1.97 V	292	58.3	-4.0
4	19605.00	41.2 AV	54.0	-12.8	1.97 V	292	45.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.2 PK	74.0	-27.8	2.16 H	232	33.0	13.2
2	13390.00	35.5 AV	54.0	-18.5	2.16 H	232	22.3	13.2
3	20085.00	54.5 PK	74.0	-19.5	3.14 H	162	58.0	-3.5
4	20085.00	42.5 AV	54.0	-11.5	3.14 H	162	46.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.8 PK	74.0	-26.2	2.14 V	97	34.6	13.2
2	13390.00	36.4 AV	54.0	-17.6	2.14 V	97	23.2	13.2
3	20085.00	53.9 PK	74.0	-20.1	1.82 V	295	57.4	-3.5
4	20085.00	41.2 AV	54.0	-12.8	1.82 V	295	44.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.0 PK	88.2	-42.2	2.17 H	216	31.9	14.1
2	#13710.00	35.2 AV	68.2	-33.0	2.17 H	216	21.1	14.1
3	20565.00	54.0 PK	74.0	-20.0	3.19 H	156	57.3	-3.3
4	20565.00	41.9 AV	54.0	-12.1	3.19 H	156	45.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.4 PK	88.2	-39.8	2.20 V	115	34.3	14.1
2	#13710.00	36.7 AV	68.2	-31.5	2.20 V	115	22.6	14.1
3	20565.00	53.6 PK	74.0	-20.4	1.92 V	294	56.9	-3.3
4	20565.00	40.6 AV	54.0	-13.4	1.92 V	294	43.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.1 PK	88.2	-42.1	2.11 H	236	32.1	14.0
2	#13750.00	35.3 AV	68.2	-32.9	2.11 H	236	21.3	14.0
3	20625.00	54.2 PK	74.0	-19.8	3.13 H	137	57.5	-3.3
4	20625.00	42.4 AV	54.0	-11.6	3.13 H	137	45.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.3 PK	88.2	-39.9	2.22 V	118	34.3	14.0
2	#13750.00	36.7 AV	68.2	-31.5	2.22 V	118	22.7	14.0
3	20625.00	54.1 PK	74.0	-19.9	1.86 V	284	57.4	-3.3
4	20625.00	41.2 AV	54.0	-12.8	1.86 V	284	44.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.0 PK	88.2	-42.2	2.12 H	219	31.6	14.4
2	#13990.00	35.5 AV	68.2	-32.7	2.12 H	219	21.1	14.4
3	20985.00	54.5 PK	74.0	-19.5	3.16 H	160	57.3	-2.8
4	20985.00	42.5 AV	54.0	-11.5	3.16 H	160	45.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.1 PK	88.2	-40.1	2.20 V	99	33.7	14.4
2	#13990.00	36.7 AV	68.2	-31.5	2.20 V	99	22.3	14.4
3	20985.00	53.4 PK	74.0	-20.6	1.90 V	303	56.2	-2.8
4	20985.00	40.6 AV	54.0	-13.4	1.90 V	303	43.4	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.6 PK	88.2	-41.6	2.14 H	210	32.4	14.2
2	#14230.00	36.0 AV	68.2	-32.2	2.14 H	210	21.8	14.2
3	21345.00	53.7 PK	74.0	-20.3	3.09 H	162	55.3	-1.6
4	21345.00	41.7 AV	54.0	-12.3	3.09 H	162	43.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.3 PK	88.2	-39.9	2.23 V	92	34.1	14.2
2	#14230.00	36.8 AV	68.2	-31.4	2.23 V	92	22.6	14.2
3	21345.00	53.2 PK	74.0	-20.8	1.85 V	287	54.8	-1.6
4	21345.00	40.6 AV	54.0	-13.4	1.85 V	287	42.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.1 PK	74.0	-27.9	2.16 H	235	34.5	11.6
2	11870.00	35.6 AV	54.0	-18.4	2.16 H	235	24.0	11.6
3	17805.00	53.6 PK	74.0	-20.4	3.20 H	159	31.8	21.8
4	17805.00	41.5 AV	54.0	-12.5	3.20 H	159	19.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.1 PK	74.0	-24.9	2.24 V	99	37.5	11.6
2	11870.00	37.2 AV	54.0	-16.8	2.24 V	99	25.6	11.6
3	17805.00	53.1 PK	74.0	-20.9	1.84 V	278	31.3	21.8
4	17805.00	40.7 AV	54.0	-13.3	1.84 V	278	18.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.4 PK	74.0	-27.6	2.13 H	229	34.9	11.5
2	11910.00	35.6 AV	54.0	-18.4	2.13 H	229	24.1	11.5
3	17865.00	53.5 PK	74.0	-20.5	3.18 H	154	30.3	23.2
4	17865.00	41.6 AV	54.0	-12.4	3.18 H	154	18.4	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	2.18 V	108	37.2	11.5
2	11910.00	36.9 AV	54.0	-17.1	2.18 V	108	25.4	11.5
3	17865.00	53.6 PK	74.0	-20.4	1.90 V	288	30.4	23.2
4	17865.00	41.0 AV	54.0	-13.0	1.90 V	288	17.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.1 PK	74.0	-27.9	2.14 H	235	34.0	12.1
2	12350.00	35.3 AV	54.0	-18.7	2.14 H	235	23.2	12.1
3	18525.00	53.9 PK	74.0	-20.1	3.09 H	154	58.9	-5.0
4	18525.00	41.9 AV	54.0	-12.1	3.09 H	154	46.9	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.6 PK	74.0	-25.4	2.14 V	95	36.5	12.1
2	12350.00	37.0 AV	54.0	-17.0	2.14 V	95	24.9	12.1
3	18525.00	54.1 PK	74.0	-19.9	1.89 V	298	59.1	-5.0
4	18525.00	41.4 AV	54.0	-12.6	1.89 V	298	46.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.8 PK	88.2	-41.4	2.15 H	237	34.9	11.9
2	#12830.00	36.1 AV	68.2	-32.1	2.15 H	237	24.2	11.9
3	19245.00	54.4 PK	74.0	-19.6	3.10 H	159	58.2	-3.8
4	19245.00	42.6 AV	54.0	-11.4	3.10 H	159	46.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.5 PK	88.2	-39.7	2.18 V	106	36.6	11.9
2	#12830.00	36.9 AV	68.2	-31.3	2.18 V	106	25.0	11.9
3	19245.00	53.6 PK	74.0	-20.4	1.92 V	307	57.4	-3.8
4	19245.00	41.0 AV	54.0	-13.0	1.92 V	307	44.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.8 PK	88.2	-42.4	2.20 H	208	33.7	12.1
2	#12870.00	35.3 AV	68.2	-32.9	2.20 H	208	23.2	12.1
3	19305.00	54.5 PK	74.0	-19.5	3.12 H	147	58.2	-3.7
4	19305.00	42.5 AV	54.0	-11.5	3.12 H	147	46.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.9 PK	88.2	-39.3	2.16 V	121	36.8	12.1
2	#12870.00	37.2 AV	68.2	-31.0	2.16 V	121	25.1	12.1
3	19305.00	54.3 PK	74.0	-19.7	1.93 V	287	58.0	-3.7
4	19305.00	41.3 AV	54.0	-12.7	1.93 V	287	45.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.6 PK	88.2	-41.6	2.14 H	209	34.5	12.1
2	#12950.00	36.1 AV	68.2	-32.1	2.14 H	209	24.0	12.1
3	19425.00	53.9 PK	74.0	-20.1	3.15 H	163	57.7	-3.8
4	19425.00	42.2 AV	54.0	-11.8	3.15 H	163	46.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.2 PK	88.2	-40.0	2.20 V	109	36.1	12.1
2	#12950.00	36.8 AV	68.2	-31.4	2.20 V	109	24.7	12.1
3	19425.00	53.7 PK	74.0	-20.3	1.92 V	285	57.5	-3.8
4	19425.00	40.9 AV	54.0	-13.1	1.92 V	285	44.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.8 PK	88.2	-41.4	2.17 H	224	34.7	12.1
2	#13030.00	36.1 AV	68.2	-32.1	2.17 H	224	24.0	12.1
3	19545.00	53.9 PK	74.0	-20.1	3.16 H	157	58.0	-4.1
4	19545.00	42.1 AV	54.0	-11.9	3.16 H	157	46.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.8 PK	88.2	-40.4	2.24 V	113	35.7	12.1
2	#13030.00	36.3 AV	68.2	-31.9	2.24 V	113	24.2	12.1
3	19545.00	53.1 PK	74.0	-20.9	1.92 V	298	57.2	-4.1
4	19545.00	40.4 AV	54.0	-13.6	1.92 V	298	44.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.5 PK	88.2	-41.7	2.15 H	238	34.1	12.4
2	#13070.00	36.0 AV	68.2	-32.2	2.15 H	238	23.6	12.4
3	19605.00	53.8 PK	74.0	-20.2	3.10 H	142	57.8	-4.0
4	19605.00	42.0 AV	54.0	-12.0	3.10 H	142	46.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.1 PK	88.2	-40.1	2.23 V	101	35.7	12.4
2	#13070.00	36.3 AV	68.2	-31.9	2.23 V	101	23.9	12.4
3	19605.00	53.8 PK	74.0	-20.2	1.86 V	300	57.8	-4.0
4	19605.00	41.1 AV	54.0	-12.9	1.86 V	300	45.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.7 PK	74.0	-27.3	2.18 H	217	33.5	13.2
2	13390.00	36.0 AV	54.0	-18.0	2.18 H	217	22.8	13.2
3	20085.00	53.9 PK	74.0	-20.1	3.09 H	154	57.4	-3.5
4	20085.00	42.3 AV	54.0	-11.7	3.09 H	154	45.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.4 PK	74.0	-25.6	2.20 V	108	35.2	13.2
2	13390.00	36.8 AV	54.0	-17.2	2.20 V	108	23.6	13.2
3	20085.00	53.8 PK	74.0	-20.2	1.89 V	296	57.3	-3.5
4	20085.00	40.7 AV	54.0	-13.3	1.89 V	296	44.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.2 PK	88.2	-42.0	2.15 H	223	32.1	14.1
2	#13710.00	35.5 AV	68.2	-32.7	2.15 H	223	21.4	14.1
3	20565.00	53.9 PK	74.0	-20.1	3.15 H	161	57.2	-3.3
4	20565.00	41.8 AV	54.0	-12.2	3.15 H	161	45.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	2.18 V	106	34.5	14.1
2	#13710.00	36.8 AV	68.2	-31.4	2.18 V	106	22.7	14.1
3	20565.00	53.8 PK	74.0	-20.2	1.85 V	288	57.1	-3.3
4	20565.00	41.1 AV	54.0	-12.9	1.85 V	288	44.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.4 PK	88.2	-41.8	2.19 H	221	32.4	14.0
2	#13750.00	35.7 AV	68.2	-32.5	2.19 H	221	21.7	14.0
3	20625.00	54.0 PK	74.0	-20.0	3.09 H	140	57.3	-3.3
4	20625.00	41.9 AV	54.0	-12.1	3.09 H	140	45.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.3 PK	88.2	-39.9	2.16 V	99	34.3	14.0
2	#13750.00	36.7 AV	68.2	-31.5	2.16 V	99	22.7	14.0
3	20625.00	53.9 PK	74.0	-20.1	1.85 V	295	57.2	-3.3
4	20625.00	40.8 AV	54.0	-13.2	1.85 V	295	44.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.9 PK	88.2	-42.3	2.16 H	235	31.5	14.4
2	#13990.00	35.5 AV	68.2	-32.7	2.16 H	235	21.1	14.4
3	20985.00	54.3 PK	74.0	-19.7	3.09 H	157	57.1	-2.8
4	20985.00	42.6 AV	54.0	-11.4	3.09 H	157	45.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.9 PK	88.2	-40.3	2.19 V	122	33.5	14.4
2	#13990.00	36.6 AV	68.2	-31.6	2.19 V	122	22.2	14.4
3	20985.00	54.1 PK	74.0	-19.9	1.91 V	292	56.9	-2.8
4	20985.00	41.4 AV	54.0	-12.6	1.91 V	292	44.2	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.2 PK	88.2	-42.0	2.08 H	229	32.0	14.2
2	#14230.00	35.8 AV	68.2	-32.4	2.08 H	229	21.6	14.2
3	21345.00	53.7 PK	74.0	-20.3	3.16 H	153	55.3	-1.6
4	21345.00	41.9 AV	54.0	-12.1	3.16 H	153	43.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.5 PK	88.2	-39.7	2.24 V	117	34.3	14.2
2	#14230.00	36.8 AV	68.2	-31.4	2.24 V	117	22.6	14.2
3	21345.00	53.5 PK	74.0	-20.5	1.88 V	302	55.1	-1.6
4	21345.00	40.8 AV	54.0	-13.2	1.88 V	302	42.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	45.6 PK	74.0	-28.4	2.13 H	233	34.1	11.5
2	11930.00	35.3 AV	54.0	-18.7	2.13 H	233	23.8	11.5
3	17895.00	53.2 PK	74.0	-20.8	3.16 H	163	29.3	23.9
4	17895.00	41.6 AV	54.0	-12.4	3.16 H	163	17.7	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.5 PK	74.0	-25.5	2.21 V	111	37.0	11.5
2	11930.00	36.7 AV	54.0	-17.3	2.21 V	111	25.2	11.5
3	17895.00	54.2 PK	74.0	-19.8	1.90 V	305	30.3	23.9
4	17895.00	41.1 AV	54.0	-12.9	1.90 V	305	17.2	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	45.9 PK	74.0	-28.1	2.10 H	228	33.6	12.3
2	12330.00	35.2 AV	54.0	-18.8	2.10 H	228	22.9	12.3
3	18495.00	53.9 PK	74.0	-20.1	3.12 H	140	58.8	-4.9
4	18495.00	42.2 AV	54.0	-11.8	3.12 H	140	47.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.6 PK	74.0	-25.4	2.16 V	103	36.3	12.3
2	12330.00	37.0 AV	54.0	-17.0	2.16 V	103	24.7	12.3
3	18495.00	54.2 PK	74.0	-19.8	1.89 V	299	59.1	-4.9
4	18495.00	41.2 AV	54.0	-12.8	1.89 V	299	46.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	46.1 PK	88.2	-42.1	2.11 H	215	34.4	11.7
2	#12810.00	35.5 AV	68.2	-32.7	2.11 H	215	23.8	11.7
3	19215.00	53.6 PK	74.0	-20.4	3.11 H	136	57.3	-3.7
4	19215.00	41.9 AV	54.0	-12.1	3.11 H	136	45.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.0 PK	88.2	-40.2	2.14 V	95	36.3	11.7
2	#12810.00	36.4 AV	68.2	-31.8	2.14 V	95	24.7	11.7
3	19215.00	53.1 PK	74.0	-20.9	1.83 V	305	56.8	-3.7
4	19215.00	40.4 AV	54.0	-13.6	1.83 V	305	44.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	46.9 PK	88.2	-41.3	2.14 H	227	34.6	12.3
2	#12890.00	36.2 AV	68.2	-32.0	2.14 H	227	23.9	12.3
3	19335.00	53.7 PK	74.0	-20.3	3.19 H	132	57.4	-3.7
4	19335.00	42.0 AV	54.0	-12.0	3.19 H	132	45.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.6 PK	88.2	-39.6	2.21 V	101	36.3	12.3
2	#12890.00	36.8 AV	68.2	-31.4	2.21 V	101	24.5	12.3
3	19335.00	53.8 PK	74.0	-20.2	1.86 V	293	57.5	-3.7
4	19335.00	41.0 AV	54.0	-13.0	1.86 V	293	44.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	46.9 PK	88.2	-41.3	2.11 H	212	34.8	12.1
2	#12970.00	36.1 AV	68.2	-32.1	2.11 H	212	24.0	12.1
3	19455.00	54.3 PK	74.0	-19.7	3.12 H	143	58.2	-3.9
4	19455.00	42.5 AV	54.0	-11.5	3.12 H	143	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	49.0 PK	88.2	-39.2	2.15 V	105	36.9	12.1
2	#12970.00	37.2 AV	68.2	-31.0	2.15 V	105	25.1	12.1
3	19455.00	53.7 PK	74.0	-20.3	1.88 V	309	57.6	-3.9
4	19455.00	40.7 AV	54.0	-13.3	1.88 V	309	44.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	46.3 PK	88.2	-41.9	2.15 H	213	34.0	12.3
2	#13050.00	35.6 AV	68.2	-32.6	2.15 H	213	23.3	12.3
3	19575.00	54.1 PK	74.0	-19.9	3.13 H	159	58.2	-4.1
4	19575.00	42.0 AV	54.0	-12.0	3.13 H	159	46.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	48.9 PK	88.2	-39.3	2.22 V	115	36.6	12.3
2	#13050.00	37.0 AV	68.2	-31.2	2.22 V	115	24.7	12.3
3	19575.00	53.4 PK	74.0	-20.6	1.86 V	301	57.5	-4.1
4	19575.00	40.7 AV	54.0	-13.3	1.86 V	301	44.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	46.6 PK	88.2	-41.6	2.16 H	226	34.0	12.6
2	#13130.00	35.9 AV	68.2	-32.3	2.16 H	226	23.3	12.6
3	19695.00	53.6 PK	74.0	-20.4	3.18 H	159	57.5	-3.9
4	19695.00	41.9 AV	54.0	-12.1	3.18 H	159	45.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.1 PK	88.2	-40.1	2.19 V	93	35.5	12.6
2	#13130.00	36.7 AV	68.2	-31.5	2.19 V	93	24.1	12.6
3	19695.00	54.3 PK	74.0	-19.7	1.88 V	310	58.2	-3.9
4	19695.00	41.3 AV	54.0	-12.7	1.88 V	310	45.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	46.2 PK	88.2	-42.0	2.17 H	221	32.8	13.4
2	#13450.00	35.5 AV	68.2	-32.7	2.17 H	221	22.1	13.4
3	20175.00	53.6 PK	74.0	-20.4	3.16 H	155	56.9	-3.3
4	20175.00	41.8 AV	54.0	-12.2	3.16 H	155	45.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.3 PK	88.2	-39.9	2.16 V	101	34.9	13.4
2	#13450.00	36.6 AV	68.2	-31.6	2.16 V	101	23.2	13.4
3	20175.00	53.8 PK	74.0	-20.2	1.89 V	294	57.1	-3.3
4	20175.00	40.8 AV	54.0	-13.2	1.89 V	294	44.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	46.6 PK	88.2	-41.6	2.10 H	237	32.4	14.2
2	#13690.00	35.8 AV	68.2	-32.4	2.10 H	237	21.6	14.2
3	20535.00	54.2 PK	74.0	-19.8	3.15 H	143	57.4	-3.2
4	20535.00	42.5 AV	54.0	-11.5	3.15 H	143	45.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.4 PK	88.2	-39.8	2.15 V	109	34.2	14.2
2	#13690.00	36.5 AV	68.2	-31.7	2.15 V	109	22.3	14.2
3	20535.00	53.6 PK	74.0	-20.4	1.93 V	280	56.8	-3.2
4	20535.00	40.9 AV	54.0	-13.1	1.93 V	280	44.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	46.5 PK	88.2	-41.7	2.13 H	222	32.5	14.0
2	#13770.00	35.8 AV	68.2	-32.4	2.13 H	222	21.8	14.0
3	20655.00	54.2 PK	74.0	-19.8	3.18 H	154	57.5	-3.3
4	20655.00	42.1 AV	54.0	-11.9	3.18 H	154	45.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.0 PK	88.2	-40.2	2.17 V	95	34.0	14.0
2	#13770.00	36.3 AV	68.2	-31.9	2.17 V	95	22.3	14.0
3	20655.00	53.9 PK	74.0	-20.1	1.81 V	283	57.2	-3.3
4	20655.00	40.8 AV	54.0	-13.2	1.81 V	283	44.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	46.6 PK	88.2	-41.6	2.19 H	222	32.0	14.6
2	#14010.00	35.8 AV	68.2	-32.4	2.19 H	222	21.2	14.6
3	21015.00	53.4 PK	74.0	-20.6	3.18 H	136	56.1	-2.7
4	21015.00	41.9 AV	54.0	-12.1	3.18 H	136	44.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.3 PK	88.2	-39.9	2.12 V	96	33.7	14.6
2	#14010.00	36.7 AV	68.2	-31.5	2.12 V	96	22.1	14.6
3	21015.00	53.9 PK	74.0	-20.1	1.81 V	292	56.6	-2.7
4	21015.00	40.6 AV	54.0	-13.4	1.81 V	292	43.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	46.7 PK	88.2	-41.5	2.16 H	227	32.3	14.4
2	#14170.00	36.1 AV	68.2	-32.1	2.16 H	227	21.7	14.4
3	21255.00	53.8 PK	74.0	-20.2	3.11 H	162	55.2	-1.4
4	21255.00	41.8 AV	54.0	-12.2	3.11 H	162	43.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.2 PK	88.2	-40.0	2.23 V	107	33.8	14.4
2	#14170.00	36.6 AV	68.2	-31.6	2.23 V	107	22.2	14.4
3	21255.00	54.0 PK	74.0	-20.0	1.82 V	305	55.4	-1.4
4	21255.00	40.8 AV	54.0	-13.2	1.82 V	305	42.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.9 PK	74.0	-28.1	2.18 H	219	34.4	11.5
2	11970.00	35.4 AV	54.0	-18.6	2.18 H	219	23.9	11.5
3	17955.00	54.6 PK	74.0	-19.4	3.13 H	154	28.9	25.7
4	17955.00	42.6 AV	54.0	-11.4	3.13 H	154	16.9	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.6 PK	74.0	-25.4	2.20 V	122	37.1	11.5
2	11970.00	37.3 AV	54.0	-16.7	2.20 V	122	25.8	11.5
3	17955.00	53.2 PK	74.0	-20.8	1.87 V	297	27.5	25.7
4	17955.00	40.6 AV	54.0	-13.4	1.87 V	297	14.9	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	45.7 PK	74.0	-28.3	2.09 H	231	33.3	12.4
2	12290.00	35.3 AV	54.0	-18.7	2.09 H	231	22.9	12.4
3	18435.00	53.3 PK	74.0	-20.7	3.18 H	157	58.2	-4.9
4	18435.00	41.6 AV	54.0	-12.4	3.18 H	157	46.5	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	47.8 PK	74.0	-26.2	2.19 V	112	35.4	12.4
2	12290.00	36.4 AV	54.0	-17.6	2.19 V	112	24.0	12.4
3	18435.00	54.4 PK	74.0	-19.6	1.90 V	297	59.3	-4.9
4	18435.00	41.2 AV	54.0	-12.8	1.90 V	297	46.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.4 PK	88.2	-41.8	2.11 H	221	34.8	11.6
2	#12770.00	35.8 AV	68.2	-32.4	2.11 H	221	24.2	11.6
3	19155.00	53.6 PK	74.0	-20.4	3.09 H	160	57.4	-3.8
4	19155.00	41.7 AV	54.0	-12.3	3.09 H	160	45.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.3 PK	88.2	-39.9	2.17 V	121	36.7	11.6
2	#12770.00	36.4 AV	68.2	-31.8	2.17 V	121	24.8	11.6
3	19155.00	54.3 PK	74.0	-19.7	1.91 V	290	58.1	-3.8
4	19155.00	41.2 AV	54.0	-12.8	1.91 V	290	45.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	46.3 PK	88.2	-41.9	2.19 H	233	34.0	12.3
2	#12930.00	35.7 AV	68.2	-32.5	2.19 H	233	23.4	12.3
3	19395.00	53.8 PK	74.0	-20.2	3.19 H	151	57.5	-3.7
4	19395.00	42.0 AV	54.0	-12.0	3.19 H	151	45.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.2 PK	88.2	-40.0	2.13 V	95	35.9	12.3
2	#12930.00	36.9 AV	68.2	-31.3	2.13 V	95	24.6	12.3
3	19395.00	53.8 PK	74.0	-20.2	1.87 V	284	57.5	-3.7
4	19395.00	41.2 AV	54.0	-12.8	1.87 V	284	44.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	46.9 PK	88.2	-41.3	2.13 H	213	34.5	12.4
2	#13090.00	36.1 AV	68.2	-32.1	2.13 H	213	23.7	12.4
3	19635.00	53.7 PK	74.0	-20.3	3.19 H	148	57.7	-4.0
4	19635.00	42.0 AV	54.0	-12.0	3.19 H	148	46.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.4 PK	88.2	-39.8	2.14 V	110	36.0	12.4
2	#13090.00	36.6 AV	68.2	-31.6	2.14 V	110	24.2	12.4
3	19635.00	53.3 PK	74.0	-20.7	1.89 V	301	57.3	-4.0
4	19635.00	40.4 AV	54.0	-13.6	1.89 V	301	44.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	46.0 PK	88.2	-42.2	2.09 H	237	32.7	13.3
2	#13410.00	35.4 AV	68.2	-32.8	2.09 H	237	22.1	13.3
3	20115.00	54.1 PK	74.0	-19.9	3.17 H	133	57.6	-3.5
4	20115.00	42.5 AV	54.0	-11.5	3.17 H	133	46.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.9 PK	88.2	-39.3	2.19 V	93	35.6	13.3
2	#13410.00	37.2 AV	68.2	-31.0	2.19 V	93	23.9	13.3
3	20115.00	54.2 PK	74.0	-19.8	1.84 V	283	57.7	-3.5
4	20115.00	41.3 AV	54.0	-12.7	1.84 V	283	44.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	46.1 PK	88.2	-42.1	2.20 H	213	32.1	14.0
2	#13730.00	35.3 AV	68.2	-32.9	2.20 H	213	21.3	14.0
3	20595.00	53.7 PK	74.0	-20.3	3.10 H	158	57.0	-3.3
4	20595.00	41.7 AV	54.0	-12.3	3.10 H	158	45.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.5 PK	88.2	-39.7	2.19 V	111	34.5	14.0
2	#13730.00	36.8 AV	68.2	-31.4	2.19 V	111	22.8	14.0
3	20595.00	53.7 PK	74.0	-20.3	1.87 V	295	57.0	-3.3
4	20595.00	40.6 AV	54.0	-13.4	1.87 V	295	43.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	46.6 PK	88.2	-41.6	2.15 H	208	32.4	14.2
2	#13890.00	35.6 AV	68.2	-32.6	2.15 H	208	21.4	14.2
3	20835.00	53.5 PK	74.0	-20.5	3.07 H	165	56.4	-2.9
4	20835.00	41.5 AV	54.0	-12.5	3.07 H	165	44.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.9 PK	88.2	-39.3	2.24 V	117	34.7	14.2
2	#13890.00	37.0 AV	68.2	-31.2	2.24 V	117	22.8	14.2
3	20835.00	53.4 PK	74.0	-20.6	1.91 V	300	56.3	-2.9
4	20835.00	40.3 AV	54.0	-13.7	1.91 V	300	43.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	45.6 PK	88.2	-42.6	2.20 H	206	30.9	14.7
2	#14050.00	34.9 AV	68.2	-33.3	2.20 H	206	20.2	14.7
3	21075.00	53.7 PK	74.0	-20.3	3.10 H	169	55.9	-2.2
4	21075.00	41.4 AV	54.0	-12.6	3.10 H	169	43.6	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.2 PK	88.2	-40.0	2.13 V	125	33.5	14.7
2	#14050.00	36.5 AV	68.2	-31.7	2.13 V	125	21.8	14.7
3	21075.00	54.0 PK	74.0	-20.0	1.87 V	280	56.2	-2.2
4	21075.00	41.0 AV	54.0	-13.0	1.87 V	280	43.2	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.1 PK	74.0	-27.9	2.20 H	234	34.2	11.9
2	12050.00	35.4 AV	54.0	-18.6	2.20 H	234	23.5	11.9
3	18075.00	54.1 PK	74.0	-19.9	3.20 H	158	58.8	-4.7
4	18075.00	42.5 AV	54.0	-11.5	3.20 H	158	47.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.2 PK	74.0	-25.8	2.16 V	105	36.3	11.9
2	12050.00	36.5 AV	54.0	-17.5	2.16 V	105	24.6	11.9
3	18075.00	54.2 PK	74.0	-19.8	1.83 V	280	58.9	-4.7
4	18075.00	41.1 AV	54.0	-12.9	1.83 V	280	45.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	46.5 PK	74.0	-27.5	2.13 H	231	34.7	11.8
2	12370.00	36.2 AV	54.0	-17.8	2.13 H	231	24.4	11.8
3	18555.00	54.3 PK	74.0	-19.7	3.09 H	134	59.2	-4.9
4	18555.00	42.4 AV	54.0	-11.6	3.09 H	134	47.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	47.7 PK	74.0	-26.3	2.23 V	104	35.9	11.8
2	12370.00	36.4 AV	54.0	-17.6	2.23 V	104	24.6	11.8
3	18555.00	54.4 PK	74.0	-19.6	1.86 V	284	59.3	-4.9
4	18555.00	41.3 AV	54.0	-12.7	1.86 V	284	46.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	46.1 PK	74.0	-27.9	2.14 H	212	34.6	11.5
2	12690.00	35.5 AV	54.0	-18.5	2.14 H	212	24.0	11.5
3	19035.00	54.2 PK	74.0	-19.8	3.12 H	156	58.1	-3.9
4	19035.00	42.2 AV	54.0	-11.8	3.12 H	156	46.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.4 PK	74.0	-25.6	2.22 V	113	36.9	11.5
2	12690.00	36.7 AV	54.0	-17.3	2.22 V	113	25.2	11.5
3	19035.00	53.6 PK	74.0	-20.4	1.92 V	298	57.5	-3.9
4	19035.00	40.6 AV	54.0	-13.4	1.92 V	298	44.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	46.2 PK	88.2	-42.0	2.17 H	207	34.2	12.0
2	#13010.00	35.6 AV	68.2	-32.6	2.17 H	207	23.6	12.0
3	19515.00	53.8 PK	74.0	-20.2	3.19 H	144	57.9	-4.1
4	19515.00	42.1 AV	54.0	-11.9	3.19 H	144	46.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.5 PK	88.2	-39.7	2.22 V	102	36.5	12.0
2	#13010.00	36.7 AV	68.2	-31.5	2.22 V	102	24.7	12.0
3	19515.00	54.5 PK	74.0	-19.5	1.87 V	287	58.6	-4.1
4	19515.00	41.4 AV	54.0	-12.6	1.87 V	287	45.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.4 PK	74.0	-27.6	2.20 H	236	33.3	13.1
2	13330.00	35.7 AV	54.0	-18.3	2.20 H	236	22.6	13.1
3	19995.00	54.0 PK	74.0	-20.0	3.20 H	145	57.6	-3.6
4	19995.00	41.9 AV	54.0	-12.1	3.20 H	145	45.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.5 PK	74.0	-25.5	2.21 V	119	35.4	13.1
2	13330.00	36.9 AV	54.0	-17.1	2.21 V	119	23.8	13.1
3	19995.00	54.1 PK	74.0	-19.9	1.82 V	286	57.7	-3.6
4	19995.00	41.0 AV	54.0	-13.0	1.82 V	286	44.6	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.1 PK	88.2	-42.1	2.16 H	227	32.1	14.0
2	#13650.00	35.8 AV	68.2	-32.4	2.16 H	227	21.8	14.0
3	20475.00	53.9 PK	74.0	-20.1	3.14 H	161	57.1	-3.2
4	20475.00	41.8 AV	54.0	-12.2	3.14 H	161	45.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.0 PK	88.2	-39.2	2.14 V	114	35.0	14.0
2	#13650.00	37.2 AV	68.2	-31.0	2.14 V	114	23.2	14.0
3	20475.00	54.3 PK	74.0	-19.7	1.84 V	284	57.5	-3.2
4	20475.00	41.2 AV	54.0	-12.8	1.84 V	284	44.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.2 PK	88.2	-42.0	2.13 H	229	31.8	14.4
2	#13970.00	35.8 AV	68.2	-32.4	2.13 H	229	21.4	14.4
3	20955.00	53.9 PK	74.0	-20.1	3.10 H	148	56.6	-2.7
4	20955.00	42.2 AV	54.0	-11.8	3.10 H	148	44.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.1 PK	88.2	-39.1	2.17 V	103	34.7	14.4
2	#13970.00	37.3 AV	68.2	-30.9	2.17 V	103	22.9	14.4
3	20955.00	54.3 PK	74.0	-19.7	1.87 V	305	57.0	-2.7
4	20955.00	41.3 AV	54.0	-12.7	1.87 V	305	44.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

(under control of a low-power indoor AP)

Mode B

1S1T

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.5 PK	74.0	-29.5	2.17 H	192	32.9	11.6
2	11870.00	33.8 AV	54.0	-20.2	2.17 H	192	22.2	11.6
3	17805.00	48.4 PK	74.0	-25.6	2.10 H	139	26.6	21.8
4	17805.00	37.0 AV	54.0	-17.0	2.10 H	139	15.2	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.6 PK	74.0	-28.4	1.23 V	181	34.0	11.6
2	11870.00	35.4 AV	54.0	-18.6	1.23 V	181	23.8	11.6
3	17805.00	51.0 PK	74.0	-23.0	2.34 V	233	29.2	21.8
4	17805.00	39.9 AV	54.0	-14.1	2.34 V	233	18.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.9 PK	74.0	-29.1	2.22 H	179	33.4	11.5
2	11910.00	34.1 AV	54.0	-19.9	2.22 H	179	22.6	11.5
3	17865.00	48.5 PK	74.0	-25.5	2.09 H	136	25.3	23.2
4	17865.00	37.2 AV	54.0	-16.8	2.09 H	136	14.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.9 PK	74.0	-28.1	1.20 V	183	34.4	11.5
2	11910.00	35.7 AV	54.0	-18.3	1.20 V	183	24.2	11.5
3	17865.00	51.1 PK	74.0	-22.9	2.29 V	225	27.9	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.29 V	225	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.1 PK	88.2	-43.1	2.27 H	178	33.2	11.9
2	#12830.00	34.0 AV	68.2	-34.2	2.27 H	178	22.1	11.9
3	19245.00	48.0 PK	74.0	-26.0	2.04 H	145	51.8	-3.8
4	19245.00	36.9 AV	54.0	-17.1	2.04 H	145	40.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.7 PK	88.2	-42.5	1.23 V	175	33.8	11.9
2	#12830.00	35.7 AV	68.2	-32.5	1.23 V	175	23.8	11.9
3	19245.00	51.3 PK	74.0	-22.7	2.32 V	217	55.1	-3.8
4	19245.00	40.2 AV	54.0	-13.8	2.32 V	217	44.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.6 PK	88.2	-43.6	2.17 H	168	32.5	12.1
2	#12870.00	33.8 AV	68.2	-34.4	2.17 H	168	21.7	12.1
3	19305.00	49.2 PK	74.0	-24.8	2.08 H	144	52.9	-3.7
4	19305.00	37.6 AV	54.0	-16.4	2.08 H	144	41.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.1 PK	88.2	-42.1	1.25 V	171	34.0	12.1
2	#12870.00	35.7 AV	68.2	-32.5	1.25 V	171	23.6	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.27 V	211	54.7	-3.7
4	19305.00	40.2 AV	54.0	-13.8	2.27 V	211	43.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.7 PK	88.2	-43.5	2.21 H	191	32.6	12.1
2	#13030.00	33.9 AV	68.2	-34.3	2.21 H	191	21.8	12.1
3	19545.00	48.0 PK	74.0	-26.0	2.13 H	133	52.1	-4.1
4	19545.00	36.7 AV	54.0	-17.3	2.13 H	133	40.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.5 PK	88.2	-42.7	1.22 V	181	33.4	12.1
2	#13030.00	35.5 AV	68.2	-32.7	1.22 V	181	23.4	12.1
3	19545.00	50.8 PK	74.0	-23.2	2.27 V	232	54.9	-4.1
4	19545.00	40.2 AV	54.0	-13.8	2.27 V	232	44.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.9 PK	88.2	-43.3	2.20 H	179	32.5	12.4
2	#13070.00	34.1 AV	68.2	-34.1	2.20 H	179	21.7	12.4
3	19605.00	48.3 PK	74.0	-25.7	2.05 H	122	52.3	-4.0
4	19605.00	36.9 AV	54.0	-17.1	2.05 H	122	40.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.8 PK	88.2	-42.4	1.17 V	195	33.4	12.4
2	#13070.00	35.4 AV	68.2	-32.8	1.17 V	195	23.0	12.4
3	19605.00	51.0 PK	74.0	-23.0	2.24 V	220	55.0	-4.0
4	19605.00	40.1 AV	54.0	-13.9	2.24 V	220	44.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	44.5 PK	88.2	-43.7	2.27 H	173	30.5	14.0
2	#13750.00	34.0 AV	68.2	-34.2	2.27 H	173	20.0	14.0
3	20625.00	48.2 PK	74.0	-25.8	2.10 H	135	51.5	-3.3
4	20625.00	37.0 AV	54.0	-17.0	2.10 H	135	40.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.7 PK	88.2	-42.5	1.22 V	178	31.7	14.0
2	#13750.00	35.3 AV	68.2	-32.9	1.22 V	178	21.3	14.0
3	20625.00	51.2 PK	74.0	-22.8	2.30 V	218	54.5	-3.3
4	20625.00	40.0 AV	54.0	-14.0	2.30 V	218	43.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.2 PK	88.2	-43.0	2.27 H	177	30.8	14.4
2	#13990.00	34.3 AV	68.2	-33.9	2.27 H	177	19.9	14.4
3	20985.00	48.1 PK	74.0	-25.9	2.07 H	143	50.9	-2.8
4	20985.00	36.9 AV	54.0	-17.1	2.07 H	143	39.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.0 PK	88.2	-42.2	1.17 V	191	31.6	14.4
2	#13990.00	36.0 AV	68.2	-32.2	1.17 V	191	21.6	14.4
3	20985.00	50.5 PK	74.0	-23.5	2.29 V	213	53.3	-2.8
4	20985.00	39.9 AV	54.0	-14.1	2.29 V	213	42.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.5 PK	88.2	-42.7	2.22 H	188	31.3	14.2
2	#14230.00	34.6 AV	68.2	-33.6	2.22 H	188	20.4	14.2
3	21345.00	48.4 PK	74.0	-25.6	2.04 H	143	50.0	-1.6
4	21345.00	37.1 AV	54.0	-16.9	2.04 H	143	38.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.4 PK	88.2	-41.8	1.26 V	186	32.2	14.2
2	#14230.00	36.2 AV	68.2	-32.0	1.26 V	186	22.0	14.2
3	21345.00	50.7 PK	74.0	-23.3	2.33 V	216	52.3	-1.6
4	21345.00	40.0 AV	54.0	-14.0	2.33 V	216	41.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.9 PK	74.0	-29.1	2.20 H	186	33.3	11.6
2	11870.00	34.3 AV	54.0	-19.7	2.20 H	186	22.7	11.6
3	17805.00	48.8 PK	74.0	-25.2	2.03 H	118	27.0	21.8
4	17805.00	37.4 AV	54.0	-16.6	2.03 H	118	15.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.6 PK	74.0	-26.4	1.21 V	194	36.0	11.6
2	11870.00	37.1 AV	54.0	-16.9	1.21 V	194	25.5	11.6
3	17805.00	50.2 PK	74.0	-23.8	2.38 V	218	28.4	21.8
4	17805.00	39.7 AV	54.0	-14.3	2.38 V	218	17.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.5 PK	74.0	-29.5	2.23 H	182	33.0	11.5
2	11910.00	34.0 AV	54.0	-20.0	2.23 H	182	22.5	11.5
3	17865.00	48.4 PK	74.0	-25.6	2.06 H	127	25.2	23.2
4	17865.00	37.0 AV	54.0	-17.0	2.06 H	127	13.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.0 PK	74.0	-27.0	1.22 V	178	35.5	11.5
2	11910.00	36.7 AV	54.0	-17.3	1.22 V	178	25.2	11.5
3	17865.00	50.9 PK	74.0	-23.1	2.33 V	230	27.7	23.2
4	17865.00	40.1 AV	54.0	-13.9	2.33 V	230	16.9	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.9 PK	88.2	-43.3	2.21 H	183	33.0	11.9
2	#12830.00	34.3 AV	68.2	-33.9	2.21 H	183	22.4	11.9
3	19245.00	48.4 PK	74.0	-25.6	2.14 H	126	52.2	-3.8
4	19245.00	37.3 AV	54.0	-16.7	2.14 H	126	41.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.5 PK	88.2	-42.7	1.17 V	190	33.6	11.9
2	#12830.00	35.3 AV	68.2	-32.9	1.17 V	190	23.4	11.9
3	19245.00	50.3 PK	74.0	-23.7	2.23 V	212	54.1	-3.8
4	19245.00	39.7 AV	54.0	-14.3	2.23 V	212	43.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.8 PK	88.2	-43.4	2.19 H	173	32.7	12.1
2	#12870.00	33.8 AV	68.2	-34.4	2.19 H	173	21.7	12.1
3	19305.00	48.1 PK	74.0	-25.9	2.14 H	141	51.8	-3.7
4	19305.00	36.8 AV	54.0	-17.2	2.14 H	141	40.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.1 PK	88.2	-43.1	1.16 V	175	33.0	12.1
2	#12870.00	35.2 AV	68.2	-33.0	1.16 V	175	23.1	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.32 V	219	54.7	-3.7
4	19305.00	39.9 AV	54.0	-14.1	2.32 V	219	43.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.2 PK	88.2	-43.0	2.16 H	169	33.1	12.1
2	#13030.00	34.3 AV	68.2	-33.9	2.16 H	169	22.2	12.1
3	19545.00	48.6 PK	74.0	-25.4	2.08 H	131	52.7	-4.1
4	19545.00	37.3 AV	54.0	-16.7	2.08 H	131	41.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.4 PK	88.2	-41.8	1.23 V	182	34.3	12.1
2	#13030.00	36.1 AV	68.2	-32.1	1.23 V	182	24.0	12.1
3	19545.00	51.2 PK	74.0	-22.8	2.24 V	225	55.3	-4.1
4	19545.00	40.5 AV	54.0	-13.5	2.24 V	225	44.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.5 PK	88.2	-43.7	2.23 H	174	32.1	12.4
2	#13070.00	33.8 AV	68.2	-34.4	2.23 H	174	21.4	12.4
3	19605.00	49.1 PK	74.0	-24.9	2.09 H	142	53.1	-4.0
4	19605.00	37.6 AV	54.0	-16.4	2.09 H	142	41.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.6 PK	88.2	-42.6	1.25 V	192	33.2	12.4
2	#13070.00	35.3 AV	68.2	-32.9	1.25 V	192	22.9	12.4
3	19605.00	50.9 PK	74.0	-23.1	2.25 V	232	54.9	-4.0
4	19605.00	40.0 AV	54.0	-14.0	2.25 V	232	44.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.0 PK	88.2	-43.2	2.19 H	173	31.0	14.0
2	#13750.00	34.3 AV	68.2	-33.9	2.19 H	173	20.3	14.0
3	20625.00	48.1 PK	74.0	-25.9	2.13 H	127	51.4	-3.3
4	20625.00	36.8 AV	54.0	-17.2	2.13 H	127	40.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.7 PK	88.2	-42.5	1.21 V	174	31.7	14.0
2	#13750.00	35.4 AV	68.2	-32.8	1.21 V	174	21.4	14.0
3	20625.00	50.9 PK	74.0	-23.1	2.32 V	241	54.2	-3.3
4	20625.00	40.0 AV	54.0	-14.0	2.32 V	241	43.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.8 PK	88.2	-43.4	2.27 H	178	30.4	14.4
2	#13990.00	33.8 AV	68.2	-34.4	2.27 H	178	19.4	14.4
3	20985.00	48.1 PK	74.0	-25.9	2.10 H	151	50.9	-2.8
4	20985.00	36.8 AV	54.0	-17.2	2.10 H	151	39.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.4 PK	88.2	-42.8	1.23 V	174	31.0	14.4
2	#13990.00	35.3 AV	68.2	-32.9	1.23 V	174	20.9	14.4
3	20985.00	51.8 PK	74.0	-22.2	2.28 V	234	54.6	-2.8
4	20985.00	40.7 AV	54.0	-13.3	2.28 V	234	43.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.1 PK	88.2	-43.1	2.28 H	180	30.9	14.2
2	#14230.00	34.1 AV	68.2	-34.1	2.28 H	180	19.9	14.2
3	21345.00	48.1 PK	74.0	-25.9	2.13 H	121	49.7	-1.6
4	21345.00	36.7 AV	54.0	-17.3	2.13 H	121	38.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.8 PK	88.2	-42.4	1.24 V	196	31.6	14.2
2	#14230.00	35.8 AV	68.2	-32.4	1.24 V	196	21.6	14.2
3	21345.00	51.0 PK	74.0	-23.0	2.34 V	239	52.6	-1.6
4	21345.00	39.9 AV	54.0	-14.1	2.34 V	239	41.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.1 PK	74.0	-28.9	2.28 H	190	33.5	11.6
2	11870.00	34.0 AV	54.0	-20.0	2.28 H	190	22.4	11.6
3	17805.00	48.1 PK	74.0	-25.9	2.05 H	112	26.3	21.8
4	17805.00	36.8 AV	54.0	-17.2	2.05 H	112	15.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.1 PK	74.0	-27.9	1.22 V	161	34.5	11.6
2	11870.00	36.0 AV	54.0	-18.0	1.22 V	161	24.4	11.6
3	17805.00	50.9 PK	74.0	-23.1	2.26 V	209	29.1	21.8
4	17805.00	40.0 AV	54.0	-14.0	2.26 V	209	18.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.7 PK	74.0	-29.3	2.25 H	182	33.2	11.5
2	11910.00	33.7 AV	54.0	-20.3	2.25 H	182	22.2	11.5
3	17865.00	48.3 PK	74.0	-25.7	2.04 H	121	25.1	23.2
4	17865.00	37.2 AV	54.0	-16.8	2.04 H	121	14.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.6 PK	74.0	-28.4	1.21 V	169	34.1	11.5
2	11910.00	35.6 AV	54.0	-18.4	1.21 V	169	24.1	11.5
3	17865.00	51.3 PK	74.0	-22.7	2.26 V	218	28.1	23.2
4	17865.00	40.3 AV	54.0	-13.7	2.26 V	218	17.1	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.6 PK	88.2	-43.6	2.24 H	186	32.7	11.9
2	#12830.00	34.1 AV	68.2	-34.1	2.24 H	186	22.2	11.9
3	19245.00	48.3 PK	74.0	-25.7	2.11 H	132	52.1	-3.8
4	19245.00	37.1 AV	54.0	-16.9	2.11 H	132	40.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.8 PK	88.2	-42.4	1.26 V	198	33.9	11.9
2	#12830.00	35.4 AV	68.2	-32.8	1.26 V	198	23.5	11.9
3	19245.00	51.2 PK	74.0	-22.8	2.29 V	240	55.0	-3.8
4	19245.00	40.2 AV	54.0	-13.8	2.29 V	240	44.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.1 PK	88.2	-43.1	2.26 H	176	33.0	12.1
2	#12870.00	34.1 AV	68.2	-34.1	2.26 H	176	22.0	12.1
3	19305.00	47.8 PK	74.0	-26.2	2.13 H	134	51.5	-3.7
4	19305.00	36.8 AV	54.0	-17.2	2.13 H	134	40.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.3 PK	88.2	-41.9	1.17 V	186	34.2	12.1
2	#12870.00	35.8 AV	68.2	-32.4	1.17 V	186	23.7	12.1
3	19305.00	51.4 PK	74.0	-22.6	2.31 V	226	55.1	-3.7
4	19305.00	40.4 AV	54.0	-13.6	2.31 V	226	44.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.3 PK	88.2	-42.9	2.20 H	192	33.2	12.1
2	#13030.00	34.3 AV	68.2	-33.9	2.20 H	192	22.2	12.1
3	19545.00	47.9 PK	74.0	-26.1	2.09 H	142	52.0	-4.1
4	19545.00	36.8 AV	54.0	-17.2	2.09 H	142	40.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.8 PK	88.2	-42.4	1.23 V	175	33.7	12.1
2	#13030.00	35.3 AV	68.2	-32.9	1.23 V	175	23.2	12.1
3	19545.00	51.2 PK	74.0	-22.8	2.33 V	222	55.3	-4.1
4	19545.00	40.4 AV	54.0	-13.6	2.33 V	222	44.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.7 PK	88.2	-43.5	2.15 H	181	32.3	12.4
2	#13070.00	34.0 AV	68.2	-34.2	2.15 H	181	21.6	12.4
3	19605.00	48.0 PK	74.0	-26.0	2.04 H	140	52.0	-4.0
4	19605.00	36.8 AV	54.0	-17.2	2.04 H	140	40.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.9 PK	88.2	-42.3	1.17 V	179	33.5	12.4
2	#13070.00	35.4 AV	68.2	-32.8	1.17 V	179	23.0	12.4
3	19605.00	50.8 PK	74.0	-23.2	2.30 V	221	54.8	-4.0
4	19605.00	40.1 AV	54.0	-13.9	2.30 V	221	44.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.3 PK	88.2	-42.9	2.23 H	188	31.3	14.0
2	#13750.00	34.4 AV	68.2	-33.8	2.23 H	188	20.4	14.0
3	20625.00	48.8 PK	74.0	-25.2	2.11 H	121	52.1	-3.3
4	20625.00	37.3 AV	54.0	-16.7	2.11 H	121	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.2 PK	88.2	-42.0	1.18 V	190	32.2	14.0
2	#13750.00	35.9 AV	68.2	-32.3	1.18 V	190	21.9	14.0
3	20625.00	51.0 PK	74.0	-23.0	2.24 V	231	54.3	-3.3
4	20625.00	40.4 AV	54.0	-13.6	2.24 V	231	43.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.3 PK	88.2	-43.9	2.24 H	165	29.9	14.4
2	#13990.00	33.6 AV	68.2	-34.6	2.24 H	165	19.2	14.4
3	20985.00	49.0 PK	74.0	-25.0	2.14 H	141	51.8	-2.8
4	20985.00	37.6 AV	54.0	-16.4	2.14 H	141	40.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.8 PK	88.2	-42.4	1.20 V	193	31.4	14.4
2	#13990.00	35.3 AV	68.2	-32.9	1.20 V	193	20.9	14.4
3	20985.00	51.3 PK	74.0	-22.7	2.29 V	233	54.1	-2.8
4	20985.00	40.7 AV	54.0	-13.3	2.29 V	233	43.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.6 PK	88.2	-43.6	2.23 H	165	30.4	14.2
2	#14230.00	33.8 AV	68.2	-34.4	2.23 H	165	19.6	14.2
3	21345.00	49.2 PK	74.0	-24.8	2.13 H	130	50.8	-1.6
4	21345.00	37.6 AV	54.0	-16.4	2.13 H	130	39.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.6 PK	88.2	-42.6	1.19 V	175	31.4	14.2
2	#14230.00	35.3 AV	68.2	-32.9	1.19 V	175	21.1	14.2
3	21345.00	51.4 PK	74.0	-22.6	2.26 V	239	53.0	-1.6
4	21345.00	40.6 AV	54.0	-13.4	2.26 V	239	42.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

1S1T

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.9 PK	74.0	-29.1	2.16 H	175	33.3	11.6
2	11870.00	34.1 AV	54.0	-19.9	2.16 H	175	22.5	11.6
3	17805.00	48.6 PK	74.0	-25.4	2.17 H	115	26.8	21.8
4	17805.00	37.2 AV	54.0	-16.8	2.17 H	115	15.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.3 PK	74.0	-28.7	1.20 V	168	33.7	11.6
2	11870.00	35.4 AV	54.0	-18.6	1.20 V	168	23.8	11.6
3	17805.00	50.8 PK	74.0	-23.2	2.30 V	203	29.0	21.8
4	17805.00	39.8 AV	54.0	-14.2	2.30 V	203	18.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.2 PK	74.0	-28.8	2.21 H	170	33.7	11.5
2	11910.00	34.4 AV	54.0	-19.6	2.21 H	170	22.9	11.5
3	17865.00	47.9 PK	74.0	-26.1	2.12 H	127	24.7	23.2
4	17865.00	36.8 AV	54.0	-17.2	2.12 H	127	13.6	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.5 PK	74.0	-28.5	1.25 V	177	34.0	11.5
2	11910.00	35.5 AV	54.0	-18.5	1.25 V	177	24.0	11.5
3	17865.00	51.2 PK	74.0	-22.8	2.32 V	211	28.0	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.32 V	211	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.3 PK	88.2	-43.9	2.20 H	178	32.4	11.9
2	#12830.00	33.6 AV	68.2	-34.6	2.20 H	178	21.7	11.9
3	19245.00	48.9 PK	74.0	-25.1	2.15 H	130	52.7	-3.8
4	19245.00	37.4 AV	54.0	-16.6	2.15 H	130	41.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.4 PK	88.2	-42.8	1.22 V	197	33.5	11.9
2	#12830.00	35.2 AV	68.2	-33.0	1.22 V	197	23.3	11.9
3	19245.00	51.1 PK	74.0	-22.9	2.32 V	229	54.9	-3.8
4	19245.00	39.9 AV	54.0	-14.1	2.32 V	229	43.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.2 PK	88.2	-43.0	2.16 H	186	33.1	12.1
2	#12870.00	34.2 AV	68.2	-34.0	2.16 H	186	22.1	12.1
3	19305.00	48.1 PK	74.0	-25.9	2.07 H	122	51.8	-3.7
4	19305.00	37.0 AV	54.0	-17.0	2.07 H	122	40.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.9 PK	88.2	-42.3	1.18 V	193	33.8	12.1
2	#12870.00	35.9 AV	68.2	-32.3	1.18 V	193	23.8	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.28 V	213	54.7	-3.7
4	19305.00	39.9 AV	54.0	-14.1	2.28 V	213	43.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.3 PK	88.2	-43.9	2.25 H	175	32.2	12.1
2	#13030.00	33.6 AV	68.2	-34.6	2.25 H	175	21.5	12.1
3	19545.00	48.3 PK	74.0	-25.7	2.05 H	131	52.4	-4.1
4	19545.00	37.1 AV	54.0	-16.9	2.05 H	131	41.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.9 PK	88.2	-42.3	1.25 V	193	33.8	12.1
2	#13030.00	35.9 AV	68.2	-32.3	1.25 V	193	23.8	12.1
3	19545.00	51.4 PK	74.0	-22.6	2.25 V	217	55.5	-4.1
4	19545.00	40.6 AV	54.0	-13.4	2.25 V	217	44.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.6 PK	88.2	-43.6	2.25 H	174	32.2	12.4
2	#13070.00	33.8 AV	68.2	-34.4	2.25 H	174	21.4	12.4
3	19605.00	48.9 PK	74.0	-25.1	2.04 H	144	52.9	-4.0
4	19605.00	37.6 AV	54.0	-16.4	2.04 H	144	41.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.9 PK	88.2	-42.3	1.18 V	184	33.5	12.4
2	#13070.00	35.9 AV	68.2	-32.3	1.18 V	184	23.5	12.4
3	19605.00	51.5 PK	74.0	-22.5	2.30 V	220	55.5	-4.0
4	19605.00	40.5 AV	54.0	-13.5	2.30 V	220	44.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.0 PK	88.2	-43.2	2.21 H	174	31.0	14.0
2	#13750.00	33.9 AV	68.2	-34.3	2.21 H	174	19.9	14.0
3	20625.00	48.9 PK	74.0	-25.1	2.07 H	137	52.2	-3.3
4	20625.00	37.4 AV	54.0	-16.6	2.07 H	137	40.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.8 PK	88.2	-42.4	1.26 V	187	31.8	14.0
2	#13750.00	35.5 AV	68.2	-32.7	1.26 V	187	21.5	14.0
3	20625.00	51.3 PK	74.0	-22.7	2.27 V	212	54.6	-3.3
4	20625.00	40.1 AV	54.0	-13.9	2.27 V	212	43.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.6 PK	88.2	-43.6	2.22 H	184	30.2	14.4
2	#13990.00	34.1 AV	68.2	-34.1	2.22 H	184	19.7	14.4
3	20985.00	48.3 PK	74.0	-25.7	2.07 H	142	51.1	-2.8
4	20985.00	37.2 AV	54.0	-16.8	2.07 H	142	40.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.7 PK	88.2	-42.5	1.16 V	171	31.3	14.4
2	#13990.00	35.5 AV	68.2	-32.7	1.16 V	171	21.1	14.4
3	20985.00	51.0 PK	74.0	-23.0	2.29 V	233	53.8	-2.8
4	20985.00	39.9 AV	54.0	-14.1	2.29 V	233	42.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.5 PK	88.2	-43.7	2.22 H	197	30.3	14.2
2	#14230.00	34.2 AV	68.2	-34.0	2.22 H	197	20.0	14.2
3	21345.00	48.7 PK	74.0	-25.3	2.03 H	154	50.3	-1.6
4	21345.00	37.6 AV	54.0	-16.4	2.03 H	154	39.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.0 PK	88.2	-42.2	1.30 V	189	31.8	14.2
2	#14230.00	35.9 AV	68.2	-32.3	1.30 V	189	21.7	14.2
3	21345.00	50.8 PK	74.0	-23.2	2.27 V	210	52.4	-1.6
4	21345.00	39.7 AV	54.0	-14.3	2.27 V	210	41.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.7 PK	74.0	-29.3	2.22 H	174	33.1	11.6
2	11870.00	33.8 AV	54.0	-20.2	2.22 H	174	22.2	11.6
3	17805.00	48.8 PK	74.0	-25.2	2.10 H	137	27.0	21.8
4	17805.00	37.4 AV	54.0	-16.6	2.10 H	137	15.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.7 PK	74.0	-28.3	1.21 V	210	34.1	11.6
2	11870.00	35.7 AV	54.0	-18.3	1.21 V	210	24.1	11.6
3	17805.00	51.7 PK	74.0	-22.3	2.34 V	250	29.9	21.8
4	17805.00	40.4 AV	54.0	-13.6	2.34 V	250	18.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.0 PK	74.0	-29.0	2.26 H	178	33.5	11.5
2	11910.00	34.0 AV	54.0	-20.0	2.26 H	178	22.5	11.5
3	17865.00	49.3 PK	74.0	-24.7	2.08 H	131	26.1	23.2
4	17865.00	37.7 AV	54.0	-16.3	2.08 H	131	14.5	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.1 PK	74.0	-27.9	1.23 V	199	34.6	11.5
2	11910.00	36.0 AV	54.0	-18.0	1.23 V	199	24.5	11.5
3	17865.00	51.5 PK	74.0	-22.5	2.29 V	238	28.3	23.2
4	17865.00	40.4 AV	54.0	-13.6	2.29 V	238	17.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.9 PK	88.2	-43.3	2.26 H	172	33.0	11.9
2	#12830.00	34.2 AV	68.2	-34.0	2.26 H	172	22.3	11.9
3	19245.00	49.1 PK	74.0	-24.9	2.09 H	140	52.9	-3.8
4	19245.00	37.6 AV	54.0	-16.4	2.09 H	140	41.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.6 PK	88.2	-41.6	1.23 V	192	34.7	11.9
2	#12830.00	36.2 AV	68.2	-32.0	1.23 V	192	24.3	11.9
3	19245.00	50.8 PK	74.0	-23.2	2.31 V	230	54.6	-3.8
4	19245.00	40.0 AV	54.0	-14.0	2.31 V	230	43.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.6 PK	88.2	-43.6	2.24 H	187	32.5	12.1
2	#12870.00	33.6 AV	68.2	-34.6	2.24 H	187	21.5	12.1
3	19305.00	48.4 PK	74.0	-25.6	2.08 H	139	52.1	-3.7
4	19305.00	37.2 AV	54.0	-16.8	2.08 H	139	40.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.2 PK	88.2	-42.0	1.18 V	181	34.1	12.1
2	#12870.00	35.7 AV	68.2	-32.5	1.18 V	181	23.6	12.1
3	19305.00	51.3 PK	74.0	-22.7	2.27 V	212	55.0	-3.7
4	19305.00	40.1 AV	54.0	-13.9	2.27 V	212	43.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.0 PK	88.2	-43.2	2.26 H	187	32.9	12.1
2	#13030.00	34.2 AV	68.2	-34.0	2.26 H	187	22.1	12.1
3	19545.00	48.2 PK	74.0	-25.8	2.13 H	137	52.3	-4.1
4	19545.00	36.8 AV	54.0	-17.2	2.13 H	137	40.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.8 PK	88.2	-42.4	1.15 V	173	33.7	12.1
2	#13030.00	35.8 AV	68.2	-32.4	1.15 V	173	23.7	12.1
3	19545.00	51.4 PK	74.0	-22.6	2.26 V	211	55.5	-4.1
4	19545.00	40.5 AV	54.0	-13.5	2.26 V	211	44.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.1 PK	88.2	-43.1	2.24 H	168	32.7	12.4
2	#13070.00	34.2 AV	68.2	-34.0	2.24 H	168	21.8	12.4
3	19605.00	48.1 PK	74.0	-25.9	2.14 H	151	52.1	-4.0
4	19605.00	36.9 AV	54.0	-17.1	2.14 H	151	40.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.4 PK	88.2	-42.8	1.18 V	173	33.0	12.4
2	#13070.00	35.4 AV	68.2	-32.8	1.18 V	173	23.0	12.4
3	19605.00	50.7 PK	74.0	-23.3	2.32 V	239	54.7	-4.0
4	19605.00	39.8 AV	54.0	-14.2	2.32 V	239	43.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.0 PK	88.2	-43.2	2.18 H	174	31.0	14.0
2	#13750.00	34.3 AV	68.2	-33.9	2.18 H	174	20.3	14.0
3	20625.00	48.2 PK	74.0	-25.8	2.10 H	130	51.5	-3.3
4	20625.00	37.0 AV	54.0	-17.0	2.10 H	130	40.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.0 PK	88.2	-42.2	1.19 V	198	32.0	14.0
2	#13750.00	35.6 AV	68.2	-32.6	1.19 V	198	21.6	14.0
3	20625.00	50.9 PK	74.0	-23.1	2.29 V	219	54.2	-3.3
4	20625.00	39.7 AV	54.0	-14.3	2.29 V	219	43.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.4 PK	88.2	-43.8	2.24 H	166	30.0	14.4
2	#13990.00	33.8 AV	68.2	-34.4	2.24 H	166	19.4	14.4
3	20985.00	49.1 PK	74.0	-24.9	2.13 H	121	51.9	-2.8
4	20985.00	37.7 AV	54.0	-16.3	2.13 H	121	40.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.4 PK	88.2	-42.8	1.19 V	173	31.0	14.4
2	#13990.00	35.4 AV	68.2	-32.8	1.19 V	173	21.0	14.4
3	20985.00	51.4 PK	74.0	-22.6	2.32 V	224	54.2	-2.8
4	20985.00	40.3 AV	54.0	-13.7	2.32 V	224	43.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.9 PK	88.2	-43.3	2.17 H	187	30.7	14.2
2	#14230.00	34.1 AV	68.2	-34.1	2.17 H	187	19.9	14.2
3	21345.00	48.0 PK	74.0	-26.0	2.10 H	125	49.6	-1.6
4	21345.00	36.9 AV	54.0	-17.1	2.10 H	125	38.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.2 PK	88.2	-42.0	1.24 V	177	32.0	14.2
2	#14230.00	36.1 AV	68.2	-32.1	1.24 V	177	21.9	14.2
3	21345.00	51.0 PK	74.0	-23.0	2.28 V	221	52.6	-1.6
4	21345.00	40.1 AV	54.0	-13.9	2.28 V	221	41.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.1 PK	74.0	-28.9	2.19 H	198	33.6	11.5
2	11970.00	34.6 AV	54.0	-19.4	2.19 H	198	23.1	11.5
3	17955.00	48.7 PK	74.0	-25.3	2.07 H	157	23.0	25.7
4	17955.00	37.6 AV	54.0	-16.4	2.07 H	157	11.9	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.6 PK	74.0	-28.4	1.26 V	173	34.1	11.5
2	11970.00	35.2 AV	54.0	-18.8	1.26 V	173	23.7	11.5
3	17955.00	51.9 PK	74.0	-22.1	2.28 V	215	26.2	25.7
4	17955.00	40.4 AV	54.0	-13.6	2.28 V	215	14.7	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	44.1 PK	88.2	-44.1	2.17 H	170	32.5	11.6
2	#12770.00	33.8 AV	68.2	-34.4	2.17 H	170	22.2	11.6
3	19155.00	48.1 PK	74.0	-25.9	2.09 H	149	51.9	-3.8
4	19155.00	36.8 AV	54.0	-17.2	2.09 H	149	40.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	45.7 PK	88.2	-42.5	1.29 V	174	34.1	11.6
2	#12770.00	35.3 AV	68.2	-32.9	1.29 V	174	23.7	11.6
3	19155.00	51.5 PK	74.0	-22.5	2.24 V	209	55.3	-3.8
4	19155.00	40.3 AV	54.0	-13.7	2.24 V	209	44.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	44.2 PK	88.2	-44.0	2.20 H	177	31.9	12.3
2	#12930.00	33.6 AV	68.2	-34.6	2.20 H	177	21.3	12.3
3	19395.00	48.7 PK	74.0	-25.3	2.07 H	137	52.4	-3.7
4	19395.00	37.3 AV	54.0	-16.7	2.07 H	137	41.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	46.0 PK	88.2	-42.2	1.27 V	173	33.7	12.3
2	#12930.00	35.7 AV	68.2	-32.5	1.27 V	173	23.4	12.3
3	19395.00	50.8 PK	74.0	-23.2	2.23 V	210	54.5	-3.7
4	19395.00	39.6 AV	54.0	-14.4	2.23 V	210	43.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	44.5 PK	88.2	-43.7	2.21 H	169	32.1	12.4
2	#13090.00	34.3 AV	68.2	-33.9	2.21 H	169	21.9	12.4
3	19635.00	48.5 PK	74.0	-25.5	2.03 H	141	52.5	-4.0
4	19635.00	37.2 AV	54.0	-16.8	2.03 H	141	41.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	45.7 PK	88.2	-42.5	1.25 V	180	33.3	12.4
2	#13090.00	35.2 AV	68.2	-33.0	1.25 V	180	22.8	12.4
3	19635.00	51.0 PK	74.0	-23.0	2.30 V	209	55.0	-4.0
4	19635.00	40.0 AV	54.0	-14.0	2.30 V	209	44.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	44.5 PK	88.2	-43.7	2.17 H	188	30.5	14.0
2	#13730.00	33.7 AV	68.2	-34.5	2.17 H	188	19.7	14.0
3	20595.00	47.5 PK	74.0	-26.5	2.04 H	129	50.8	-3.3
4	20595.00	36.7 AV	54.0	-17.3	2.04 H	129	40.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	45.5 PK	88.2	-42.7	1.23 V	185	31.5	14.0
2	#13730.00	35.3 AV	68.2	-32.9	1.23 V	185	21.3	14.0
3	20595.00	51.6 PK	74.0	-22.4	2.24 V	203	54.9	-3.3
4	20595.00	40.2 AV	54.0	-13.8	2.24 V	203	43.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	44.8 PK	88.2	-43.4	2.17 H	197	30.6	14.2
2	#13890.00	34.3 AV	68.2	-33.9	2.17 H	197	20.1	14.2
3	20835.00	48.8 PK	74.0	-25.2	2.03 H	153	51.7	-2.9
4	20835.00	37.5 AV	54.0	-16.5	2.03 H	153	40.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	45.7 PK	88.2	-42.5	1.23 V	189	31.5	14.2
2	#13890.00	35.2 AV	68.2	-33.0	1.23 V	189	21.0	14.2
3	20835.00	51.8 PK	74.0	-22.2	2.29 V	204	54.7	-2.9
4	20835.00	40.4 AV	54.0	-13.6	2.29 V	204	43.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	44.8 PK	88.2	-43.4	2.20 H	198	30.1	14.7
2	#14050.00	34.2 AV	68.2	-34.0	2.20 H	198	19.5	14.7
3	21075.00	48.7 PK	74.0	-25.3	2.06 H	150	50.9	-2.2
4	21075.00	37.3 AV	54.0	-16.7	2.06 H	150	39.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	45.6 PK	88.2	-42.6	1.25 V	198	30.9	14.7
2	#14050.00	35.1 AV	68.2	-33.1	1.25 V	198	20.4	14.7
3	21075.00	50.9 PK	74.0	-23.1	2.26 V	207	53.1	-2.2
4	21075.00	39.7 AV	54.0	-14.3	2.26 V	207	41.9	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.8 PK	74.0	-29.2	2.27 H	192	32.9	11.9
2	12050.00	34.1 AV	54.0	-19.9	2.27 H	192	22.2	11.9
3	18075.00	48.2 PK	74.0	-25.8	2.03 H	154	52.9	-4.7
4	18075.00	36.8 AV	54.0	-17.2	2.03 H	154	41.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.1 PK	74.0	-27.9	1.25 V	171	34.2	11.9
2	12050.00	35.9 AV	54.0	-18.1	1.25 V	171	24.0	11.9
3	18075.00	51.1 PK	74.0	-22.9	2.28 V	204	55.8	-4.7
4	18075.00	40.2 AV	54.0	-13.8	2.28 V	204	44.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.6 PK	74.0	-29.4	2.27 H	192	33.1	11.5
2	12690.00	34.0 AV	54.0	-20.0	2.27 H	192	22.5	11.5
3	19035.00	48.7 PK	74.0	-25.3	2.08 H	129	52.6	-3.9
4	19035.00	37.6 AV	54.0	-16.4	2.08 H	129	41.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	46.5 PK	74.0	-27.5	1.30 V	183	35.0	11.5
2	12690.00	36.0 AV	54.0	-18.0	1.30 V	183	24.5	11.5
3	19035.00	51.2 PK	74.0	-22.8	2.30 V	199	55.1	-3.9
4	19035.00	40.2 AV	54.0	-13.8	2.30 V	199	44.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	44.7 PK	88.2	-43.5	2.22 H	188	32.7	12.0
2	#13010.00	34.4 AV	68.2	-33.8	2.22 H	188	22.4	12.0
3	19515.00	47.7 PK	74.0	-26.3	2.08 H	150	51.8	-4.1
4	19515.00	36.8 AV	54.0	-17.2	2.08 H	150	40.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	46.1 PK	88.2	-42.1	1.29 V	175	34.1	12.0
2	#13010.00	35.5 AV	68.2	-32.7	1.29 V	175	23.5	12.0
3	19515.00	51.7 PK	74.0	-22.3	2.32 V	226	55.8	-4.1
4	19515.00	40.6 AV	54.0	-13.4	2.32 V	226	44.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.8 PK	74.0	-29.2	2.28 H	200	31.7	13.1
2	13330.00	34.3 AV	54.0	-19.7	2.28 H	200	21.2	13.1
3	19995.00	48.4 PK	74.0	-25.6	2.06 H	153	52.0	-3.6
4	19995.00	37.3 AV	54.0	-16.7	2.06 H	153	40.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.0 PK	74.0	-28.0	1.22 V	183	32.9	13.1
2	13330.00	35.5 AV	54.0	-18.5	1.22 V	183	22.4	13.1
3	19995.00	50.8 PK	74.0	-23.2	2.31 V	204	54.4	-3.6
4	19995.00	39.8 AV	54.0	-14.2	2.31 V	204	43.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	44.1 PK	88.2	-44.1	2.24 H	195	30.1	14.0
2	#13650.00	33.8 AV	68.2	-34.4	2.24 H	195	19.8	14.0
3	20475.00	48.2 PK	74.0	-25.8	2.09 H	130	51.4	-3.2
4	20475.00	37.0 AV	54.0	-17.0	2.09 H	130	40.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.0 PK	88.2	-42.2	1.24 V	186	32.0	14.0
2	#13650.00	35.6 AV	68.2	-32.6	1.24 V	186	21.6	14.0
3	20475.00	51.4 PK	74.0	-22.6	2.26 V	214	54.6	-3.2
4	20475.00	40.0 AV	54.0	-14.0	2.26 V	214	43.2	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.6 PK	88.2	-43.6	2.24 H	182	30.2	14.4
2	#13970.00	33.9 AV	68.2	-34.3	2.24 H	182	19.5	14.4
3	20955.00	48.1 PK	74.0	-25.9	2.12 H	149	50.8	-2.7
4	20955.00	36.9 AV	54.0	-17.1	2.12 H	149	39.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	45.5 PK	88.2	-42.7	1.22 V	178	31.1	14.4
2	#13970.00	35.3 AV	68.2	-32.9	1.22 V	178	20.9	14.4
3	20955.00	51.3 PK	74.0	-22.7	2.30 V	204	54.0	-2.7
4	20955.00	40.0 AV	54.0	-14.0	2.30 V	204	42.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.7 PK	74.0	-29.3	2.24 H	194	32.8	11.9
2	12050.00	34.0 AV	54.0	-20.0	2.24 H	194	22.1	11.9
3	18075.00	48.6 PK	74.0	-25.4	2.11 H	136	53.3	-4.7
4	18075.00	37.2 AV	54.0	-16.8	2.11 H	136	41.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	45.5 PK	74.0	-28.5	1.24 V	183	33.6	11.9
2	12050.00	35.0 AV	54.0	-19.0	1.24 V	183	23.1	11.9
3	18075.00	51.5 PK	74.0	-22.5	2.23 V	199	56.2	-4.7
4	18075.00	40.2 AV	54.0	-13.8	2.23 V	199	44.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.6 PK	74.0	-29.4	2.25 H	187	33.1	11.5
2	12690.00	33.8 AV	54.0	-20.2	2.25 H	187	22.3	11.5
3	19035.00	48.0 PK	74.0	-26.0	2.03 H	147	51.9	-3.9
4	19035.00	36.9 AV	54.0	-17.1	2.03 H	147	40.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.5 PK	74.0	-28.5	1.22 V	198	34.0	11.5
2	12690.00	35.0 AV	54.0	-19.0	1.22 V	198	23.5	11.5
3	19035.00	51.4 PK	74.0	-22.6	2.30 V	201	55.3	-3.9
4	19035.00	40.4 AV	54.0	-13.6	2.30 V	201	44.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	44.6 PK	88.2	-43.6	2.17 H	181	32.6	12.0
2	#13010.00	34.2 AV	68.2	-34.0	2.17 H	181	22.2	12.0
3	19515.00	48.5 PK	74.0	-25.5	2.04 H	155	52.6	-4.1
4	19515.00	37.6 AV	54.0	-16.4	2.04 H	155	41.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	46.1 PK	88.2	-42.1	1.28 V	199	34.1	12.0
2	#13010.00	35.9 AV	68.2	-32.3	1.28 V	199	23.9	12.0
3	19515.00	51.1 PK	74.0	-22.9	2.29 V	206	55.2	-4.1
4	19515.00	39.8 AV	54.0	-14.2	2.29 V	206	43.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.7 PK	74.0	-29.3	2.22 H	197	31.6	13.1
2	13330.00	34.1 AV	54.0	-19.9	2.22 H	197	21.0	13.1
3	19995.00	49.1 PK	74.0	-24.9	2.09 H	154	52.7	-3.6
4	19995.00	37.7 AV	54.0	-16.3	2.09 H	154	41.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.7 PK	74.0	-28.3	1.23 V	173	32.6	13.1
2	13330.00	35.6 AV	54.0	-18.4	1.23 V	173	22.5	13.1
3	19995.00	51.1 PK	74.0	-22.9	2.22 V	227	54.7	-3.6
4	19995.00	39.7 AV	54.0	-14.3	2.22 V	227	43.3	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	44.0 PK	88.2	-44.2	2.18 H	191	30.0	14.0
2	#13650.00	33.8 AV	68.2	-34.4	2.18 H	191	19.8	14.0
3	20475.00	48.0 PK	74.0	-26.0	2.02 H	129	51.2	-3.2
4	20475.00	36.9 AV	54.0	-17.1	2.02 H	129	40.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	45.8 PK	88.2	-42.4	1.25 V	203	31.8	14.0
2	#13650.00	35.8 AV	68.2	-32.4	1.25 V	203	21.8	14.0
3	20475.00	51.5 PK	74.0	-22.5	2.29 V	207	54.7	-3.2
4	20475.00	40.0 AV	54.0	-14.0	2.29 V	207	43.2	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.1 PK	88.2	-44.1	2.18 H	198	29.7	14.4
2	#13970.00	33.8 AV	68.2	-34.4	2.18 H	198	19.4	14.4
3	20955.00	48.2 PK	74.0	-25.8	2.11 H	146	50.9	-2.7
4	20955.00	37.3 AV	54.0	-16.7	2.11 H	146	40.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	45.5 PK	88.2	-42.7	1.31 V	197	31.1	14.4
2	#13970.00	35.4 AV	68.2	-32.8	1.31 V	197	21.0	14.4
3	20955.00	51.5 PK	74.0	-22.5	2.28 V	217	54.2	-2.7
4	20955.00	40.0 AV	54.0	-14.0	2.28 V	217	42.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

(under control of a low-power indoor AP)

Mode B

2TX

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.8 PK	74.0	-28.2	2.11 H	224	34.2	11.6
2	11870.00	35.1 AV	54.0	-18.9	2.11 H	224	23.5	11.6
3	17805.00	53.9 PK	74.0	-20.1	3.16 H	136	32.1	21.8
4	17805.00	42.1 AV	54.0	-11.9	3.16 H	136	20.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.3 PK	74.0	-24.7	1.10 V	174	37.7	11.6
2	11870.00	38.1 AV	54.0	-15.9	1.10 V	174	26.5	11.6
3	17850.00	55.1 PK	74.0	-18.9	2.15 V	220	32.2	22.9
4	17850.00	41.8 AV	54.0	-12.2	2.15 V	220	18.9	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.3 PK	74.0	-27.7	2.14 H	222	34.8	11.5
2	11910.00	35.7 AV	54.0	-18.3	2.14 H	222	24.2	11.5
3	17865.00	53.9 PK	74.0	-20.1	3.14 H	147	30.7	23.2
4	17865.00	42.1 AV	54.0	-11.9	3.14 H	147	18.9	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.9 PK	74.0	-25.1	1.14 V	158	37.4	11.5
2	11910.00	37.6 AV	54.0	-16.4	1.14 V	158	26.1	11.5
3	17865.00	54.8 PK	74.0	-19.2	2.16 V	221	31.6	23.2
4	17865.00	41.7 AV	54.0	-12.3	2.16 V	221	18.5	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.7 PK	74.0	-27.3	2.10 H	208	34.6	12.1
2	12350.00	36.0 AV	54.0	-18.0	2.10 H	208	23.9	12.1
3	18525.00	54.2 PK	74.0	-19.8	3.20 H	149	58.1	-3.9
4	18525.00	42.3 AV	54.0	-11.7	3.20 H	149	46.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.0 PK	74.0	-25.0	1.13 V	162	36.9	12.1
2	12350.00	37.7 AV	54.0	-16.3	1.13 V	162	25.6	12.1
3	18525.00	54.7 PK	74.0	-19.3	2.21 V	237	58.6	-3.9
4	18525.00	41.9 AV	54.0	-12.1	2.21 V	237	45.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.1 PK	88.2	-41.1	2.16 H	223	35.2	11.9
2	#12830.00	36.2 AV	68.2	-32.0	2.16 H	223	24.3	11.9
3	19245.00	53.8 PK	74.0	-20.2	3.18 H	143	57.7	-3.9
4	19245.00	41.7 AV	54.0	-12.3	3.18 H	143	45.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.0 PK	88.2	-39.2	1.13 V	174	37.1	11.9
2	#12830.00	37.5 AV	68.2	-30.7	1.13 V	174	25.6	11.9
3	19245.00	54.3 PK	74.0	-19.7	2.11 V	216	58.2	-3.9
4	19245.00	41.4 AV	54.0	-12.6	2.11 V	216	45.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.6 PK	88.2	-41.6	2.10 H	219	34.5	12.1
2	#12870.00	36.0 AV	68.2	-32.2	2.10 H	219	23.9	12.1
3	19305.00	53.6 PK	74.0	-20.4	3.14 H	159	57.4	-3.8
4	19305.00	42.0 AV	54.0	-12.0	3.14 H	159	45.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	1.09 V	167	36.4	12.1
2	#12870.00	37.4 AV	68.2	-30.8	1.09 V	167	25.3	12.1
3	19305.00	55.1 PK	74.0	-18.9	2.18 V	230	58.9	-3.8
4	19305.00	41.7 AV	54.0	-12.3	2.18 V	230	45.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.4 PK	88.2	-41.8	2.16 H	224	34.3	12.1
2	#12950.00	35.9 AV	68.2	-32.3	2.16 H	224	23.8	12.1
3	19425.00	53.9 PK	74.0	-20.1	3.15 H	141	57.7	-3.8
4	19425.00	41.9 AV	54.0	-12.1	3.15 H	141	45.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.9 PK	88.2	-39.3	1.12 V	152	36.8	12.1
2	#12950.00	37.8 AV	68.2	-30.4	1.12 V	152	25.7	12.1
3	19425.00	54.9 PK	74.0	-19.1	2.16 V	219	58.7	-3.8
4	19425.00	41.6 AV	54.0	-12.4	2.16 V	219	45.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.9 PK	88.2	-42.3	2.09 H	231	33.8	12.1
2	#13030.00	35.2 AV	68.2	-33.0	2.09 H	231	23.1	12.1
3	19545.00	53.7 PK	74.0	-20.3	3.09 H	149	57.5	-3.8
4	19545.00	42.1 AV	54.0	-11.9	3.09 H	149	45.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.9 PK	88.2	-39.3	1.18 V	147	36.8	12.1
2	#13030.00	37.5 AV	68.2	-30.7	1.18 V	147	25.4	12.1
3	19545.00	54.3 PK	74.0	-19.7	2.18 V	233	58.1	-3.8
4	19545.00	41.3 AV	54.0	-12.7	2.18 V	233	45.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.9 PK	88.2	-41.3	2.13 H	226	34.5	12.4
2	#13070.00	36.0 AV	68.2	-32.2	2.13 H	226	23.6	12.4
3	19605.00	53.6 PK	74.0	-20.4	3.09 H	140	57.2	-3.6
4	19605.00	41.9 AV	54.0	-12.1	3.09 H	140	45.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.4 PK	88.2	-38.8	1.12 V	167	37.0	12.4
2	#13070.00	37.9 AV	68.2	-30.3	1.12 V	167	25.5	12.4
3	19605.00	55.1 PK	74.0	-18.9	2.19 V	216	58.7	-3.6
4	19605.00	41.8 AV	54.0	-12.2	2.19 V	216	45.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.7 PK	74.0	-27.3	2.12 H	228	33.5	13.2
2	13390.00	36.0 AV	54.0	-18.0	2.12 H	228	22.8	13.2
3	20085.00	53.9 PK	74.0	-20.1	3.19 H	134	57.2	-3.3
4	20085.00	42.4 AV	54.0	-11.6	3.19 H	134	45.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.0 PK	74.0	-25.0	1.15 V	165	35.8	13.2
2	13390.00	37.6 AV	54.0	-16.4	1.15 V	165	24.4	13.2
3	20085.00	54.6 PK	74.0	-19.4	2.16 V	214	57.9	-3.3
4	20085.00	41.5 AV	54.0	-12.5	2.16 V	214	44.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.2 PK	88.2	-42.0	2.15 H	214	32.1	14.1
2	#13710.00	35.8 AV	68.2	-32.4	2.15 H	214	21.7	14.1
3	20565.00	53.7 PK	74.0	-20.3	3.15 H	158	56.6	-2.9
4	20565.00	42.2 AV	54.0	-11.8	3.15 H	158	45.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.2 PK	88.2	-39.0	1.11 V	155	35.1	14.1
2	#13710.00	37.8 AV	68.2	-30.4	1.11 V	155	23.7	14.1
3	20565.00	54.7 PK	74.0	-19.3	2.19 V	213	57.6	-2.9
4	20565.00	41.7 AV	54.0	-12.3	2.19 V	213	44.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.6 PK	88.2	-41.6	2.12 H	212	32.6	14.0
2	#13750.00	35.8 AV	68.2	-32.4	2.12 H	212	21.8	14.0
3	20625.00	53.5 PK	74.0	-20.5	3.12 H	151	56.3	-2.8
4	20625.00	42.0 AV	54.0	-12.0	3.12 H	151	44.8	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.6 PK	88.2	-39.6	1.09 V	172	34.6	14.0
2	#13750.00	37.4 AV	68.2	-30.8	1.09 V	172	23.4	14.0
3	20625.00	54.6 PK	74.0	-19.4	2.15 V	234	57.4	-2.8
4	20625.00	41.3 AV	54.0	-12.7	2.15 V	234	44.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.8 PK	88.2	-42.4	2.19 H	232	31.4	14.4
2	#13990.00	35.4 AV	68.2	-32.8	2.19 H	232	21.0	14.4
3	20985.00	54.1 PK	74.0	-19.9	3.16 H	138	56.5	-2.4
4	20985.00	42.3 AV	54.0	-11.7	3.16 H	138	44.7	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.6 PK	88.2	-39.6	1.12 V	157	34.2	14.4
2	#13990.00	37.6 AV	68.2	-30.6	1.12 V	157	23.2	14.4
3	20985.00	54.6 PK	74.0	-19.4	2.13 V	214	57.0	-2.4
4	20985.00	41.2 AV	54.0	-12.8	2.13 V	214	43.6	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.3 PK	88.2	-41.9	2.14 H	233	32.1	14.2
2	#14230.00	35.9 AV	68.2	-32.3	2.14 H	233	21.7	14.2
3	21345.00	53.9 PK	74.0	-20.1	3.09 H	143	55.3	-1.4
4	21345.00	41.9 AV	54.0	-12.1	3.09 H	143	43.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.3 PK	88.2	-38.9	1.16 V	169	35.1	14.2
2	#14230.00	37.8 AV	68.2	-30.4	1.16 V	169	23.6	14.2
3	21345.00	55.4 PK	74.0	-18.6	2.21 V	218	56.8	-1.4
4	21345.00	42.2 AV	54.0	-11.8	2.21 V	218	43.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.1 PK	74.0	-28.9	2.14 H	225	33.5	11.6
2	11870.00	34.9 AV	54.0	-19.1	2.14 H	225	23.3	11.6
3	17805.00	53.8 PK	74.0	-20.2	3.19 H	169	32.0	21.8
4	17805.00	42.1 AV	54.0	-11.9	3.19 H	169	20.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.8 PK	74.0	-25.2	1.13 V	172	37.2	11.6
2	11870.00	37.2 AV	54.0	-16.8	1.13 V	172	25.6	11.6
3	17805.00	56.3 PK	74.0	-17.7	2.29 V	212	34.5	21.8
4	17805.00	42.8 AV	54.0	-11.2	2.29 V	212	21.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.6 PK	74.0	-28.4	2.13 H	223	34.1	11.5
2	11910.00	35.2 AV	54.0	-18.8	2.13 H	223	23.7	11.5
3	17865.00	54.1 PK	74.0	-19.9	3.18 H	160	30.9	23.2
4	17865.00	42.2 AV	54.0	-11.8	3.18 H	160	19.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.4 PK	74.0	-24.6	1.18 V	179	37.9	11.5
2	11910.00	37.6 AV	54.0	-16.4	1.18 V	179	26.1	11.5
3	17865.00	56.0 PK	74.0	-18.0	2.24 V	220	32.8	23.2
4	17865.00	42.7 AV	54.0	-11.3	2.24 V	220	19.5	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.1 PK	74.0	-27.9	2.13 H	232	34.0	12.1
2	12350.00	35.6 AV	54.0	-18.4	2.13 H	232	23.5	12.1
3	18525.00	53.9 PK	74.0	-20.1	3.11 H	131	57.8	-3.9
4	18525.00	42.1 AV	54.0	-11.9	3.11 H	131	46.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.7 PK	74.0	-24.3	1.17 V	172	37.6	12.1
2	12350.00	38.3 AV	54.0	-15.7	1.17 V	172	26.2	12.1
3	18525.00	55.2 PK	74.0	-18.8	2.17 V	218	59.1	-3.9
4	18525.00	41.8 AV	54.0	-12.2	2.17 V	218	45.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.7 PK	88.2	-41.5	2.12 H	235	34.8	11.9
2	#12830.00	35.9 AV	68.2	-32.3	2.12 H	235	24.0	11.9
3	19245.00	54.4 PK	74.0	-19.6	3.18 H	158	58.3	-3.9
4	19245.00	42.5 AV	54.0	-11.5	3.18 H	158	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.6 PK	88.2	-38.6	1.19 V	178	37.7	11.9
2	#12830.00	37.9 AV	68.2	-30.3	1.19 V	178	26.0	11.9
3	19245.00	55.2 PK	74.0	-18.8	2.27 V	234	59.1	-3.9
4	19245.00	42.2 AV	54.0	-11.8	2.27 V	234	46.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.9 PK	88.2	-42.3	2.16 H	215	33.8	12.1
2	#12870.00	35.5 AV	68.2	-32.7	2.16 H	215	23.4	12.1
3	19305.00	53.8 PK	74.0	-20.2	3.09 H	143	57.6	-3.8
4	19305.00	42.1 AV	54.0	-11.9	3.09 H	143	45.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.5 PK	88.2	-38.7	1.19 V	167	37.4	12.1
2	#12870.00	38.2 AV	68.2	-30.0	1.19 V	167	26.1	12.1
3	19305.00	54.8 PK	74.0	-19.2	2.18 V	229	58.6	-3.8
4	19305.00	41.8 AV	54.0	-12.2	2.18 V	229	45.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.3 PK	88.2	-41.9	2.19 H	208	34.2	12.1
2	#12950.00	35.6 AV	68.2	-32.6	2.19 H	208	23.5	12.1
3	19425.00	54.0 PK	74.0	-20.0	3.11 H	163	57.8	-3.8
4	19425.00	42.3 AV	54.0	-11.7	3.11 H	163	46.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.4 PK	88.2	-38.8	1.19 V	174	37.3	12.1
2	#12950.00	38.0 AV	68.2	-30.2	1.19 V	174	25.9	12.1
3	19425.00	55.0 PK	74.0	-19.0	2.22 V	221	58.8	-3.8
4	19425.00	41.8 AV	54.0	-12.2	2.22 V	221	45.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.0 PK	88.2	-42.2	2.16 H	210	33.9	12.1
2	#13030.00	35.5 AV	68.2	-32.7	2.16 H	210	23.4	12.1
3	19545.00	54.4 PK	74.0	-19.6	3.17 H	140	58.2	-3.8
4	19545.00	42.4 AV	54.0	-11.6	3.17 H	140	46.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.5 PK	88.2	-38.7	1.18 V	184	37.4	12.1
2	#13030.00	38.0 AV	68.2	-30.2	1.18 V	184	25.9	12.1
3	19545.00	55.6 PK	74.0	-18.4	2.24 V	221	59.4	-3.8
4	19545.00	42.3 AV	54.0	-11.7	2.24 V	221	46.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.1 PK	88.2	-41.1	2.14 H	207	34.7	12.4
2	#13070.00	36.2 AV	68.2	-32.0	2.14 H	207	23.8	12.4
3	19605.00	53.4 PK	74.0	-20.6	3.10 H	137	57.0	-3.6
4	19605.00	41.6 AV	54.0	-12.4	3.10 H	137	45.2	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.5 PK	88.2	-38.7	1.11 V	172	37.1	12.4
2	#13070.00	37.8 AV	68.2	-30.4	1.11 V	172	25.4	12.4
3	19605.00	55.3 PK	74.0	-18.7	2.20 V	221	58.9	-3.6
4	19605.00	41.8 AV	54.0	-12.2	2.20 V	221	45.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	45.6 PK	74.0	-28.4	2.11 H	236	32.4	13.2
2	13390.00	35.2 AV	54.0	-18.8	2.11 H	236	22.0	13.2
3	20085.00	54.2 PK	74.0	-19.8	3.17 H	132	57.5	-3.3
4	20085.00	42.9 AV	54.0	-11.1	3.17 H	132	46.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.2 PK	74.0	-24.8	1.11 V	179	36.0	13.2
2	13390.00	37.9 AV	54.0	-16.1	1.11 V	179	24.7	13.2
3	20085.00	55.5 PK	74.0	-18.5	2.21 V	229	58.8	-3.3
4	20085.00	42.4 AV	54.0	-11.6	2.21 V	229	45.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.4 PK	88.2	-42.8	2.13 H	249	31.3	14.1
2	#13710.00	35.0 AV	68.2	-33.2	2.13 H	249	20.9	14.1
3	20565.00	54.8 PK	74.0	-19.2	3.16 H	119	57.7	-2.9
4	20565.00	43.2 AV	54.0	-10.8	3.16 H	119	46.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.0 PK	88.2	-39.2	1.05 V	165	34.9	14.1
2	#13710.00	37.5 AV	68.2	-30.7	1.05 V	165	23.4	14.1
3	20565.00	55.9 PK	74.0	-18.1	2.17 V	234	58.8	-2.9
4	20565.00	42.8 AV	54.0	-11.2	2.17 V	234	45.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.9 PK	88.2	-42.3	2.05 H	247	31.9	14.0
2	#13750.00	35.5 AV	68.2	-32.7	2.05 H	247	21.5	14.0
3	20625.00	54.2 PK	74.0	-19.8	3.18 H	144	57.0	-2.8
4	20625.00	42.7 AV	54.0	-11.3	3.18 H	144	45.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.5 PK	88.2	-38.7	1.18 V	156	35.5	14.0
2	#13750.00	37.8 AV	68.2	-30.4	1.18 V	156	23.8	14.0
3	20625.00	55.2 PK	74.0	-18.8	2.23 V	211	58.0	-2.8
4	20625.00	42.1 AV	54.0	-11.9	2.23 V	211	44.9	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.5 PK	88.2	-42.7	2.06 H	249	31.1	14.4
2	#13990.00	34.8 AV	68.2	-33.4	2.06 H	249	20.4	14.4
3	20985.00	54.6 PK	74.0	-19.4	3.11 H	132	57.0	-2.4
4	20985.00	42.3 AV	54.0	-11.7	3.11 H	132	44.7	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.8 PK	88.2	-38.4	1.18 V	180	35.4	14.4
2	#13990.00	38.1 AV	68.2	-30.1	1.18 V	180	23.7	14.4
3	20985.00	55.8 PK	74.0	-18.2	2.21 V	211	58.2	-2.4
4	20985.00	42.6 AV	54.0	-11.4	2.21 V	211	45.0	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.7 PK	88.2	-42.5	2.08 H	245	31.5	14.2
2	#14230.00	35.6 AV	68.2	-32.6	2.08 H	245	21.4	14.2
3	21345.00	54.1 PK	74.0	-19.9	3.13 H	142	55.5	-1.4
4	21345.00	42.5 AV	54.0	-11.5	3.13 H	142	43.9	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.0 PK	88.2	-39.2	1.13 V	154	34.8	14.2
2	#14230.00	37.5 AV	68.2	-30.7	1.13 V	154	23.3	14.2
3	21345.00	55.1 PK	74.0	-18.9	2.27 V	217	56.5	-1.4
4	21345.00	41.9 AV	54.0	-12.1	2.27 V	217	43.3	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	46.0 PK	74.0	-28.0	2.17 H	236	34.5	11.5
2	11930.00	35.6 AV	54.0	-18.4	2.17 H	236	24.1	11.5
3	17895.00	53.1 PK	74.0	-20.9	3.12 H	137	29.2	23.9
4	17895.00	42.5 AV	54.0	-11.5	3.12 H	137	18.6	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.0 PK	74.0	-26.0	2.25 V	156	36.5	11.5
2	11930.00	37.9 AV	54.0	-16.1	2.25 V	156	26.4	11.5
3	17895.00	54.3 PK	74.0	-19.7	3.00 V	147	30.4	23.9
4	17895.00	41.0 AV	54.0	-13.0	3.00 V	147	17.1	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	45.7 PK	74.0	-28.3	2.11 H	243	33.4	12.3
2	12330.00	35.3 AV	54.0	-18.7	2.11 H	243	23.0	12.3
3	18495.00	53.3 PK	74.0	-20.7	3.10 H	137	57.2	-3.9
4	18495.00	42.7 AV	54.0	-11.3	3.10 H	137	46.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.2 PK	74.0	-25.8	2.26 V	144	35.9	12.3
2	12330.00	38.3 AV	54.0	-15.7	2.26 V	144	26.0	12.3
3	18495.00	54.3 PK	74.0	-19.7	3.03 V	160	58.2	-3.9
4	18495.00	40.8 AV	54.0	-13.2	3.03 V	160	44.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	45.0 PK	88.2	-43.2	2.14 H	231	33.3	11.7
2	#12810.00	34.8 AV	68.2	-33.4	2.14 H	231	23.1	11.7
3	19215.00	53.1 PK	74.0	-20.9	3.07 H	148	57.0	-3.9
4	19215.00	42.7 AV	54.0	-11.3	3.07 H	148	46.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.1 PK	88.2	-40.1	2.27 V	154	36.4	11.7
2	#12810.00	37.9 AV	68.2	-30.3	2.27 V	154	26.2	11.7
3	19215.00	54.7 PK	74.0	-19.3	3.06 V	157	58.6	-3.9
4	19215.00	41.0 AV	54.0	-13.0	3.06 V	157	44.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	45.3 PK	88.2	-42.9	2.10 H	241	33.0	12.3
2	#12890.00	35.2 AV	68.2	-33.0	2.10 H	241	22.9	12.3
3	19335.00	53.1 PK	74.0	-20.9	3.15 H	151	56.9	-3.8
4	19335.00	42.3 AV	54.0	-11.7	3.15 H	151	46.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.8 PK	88.2	-39.4	2.30 V	152	36.5	12.3
2	#12890.00	38.7 AV	68.2	-29.5	2.30 V	152	26.4	12.3
3	19335.00	54.5 PK	74.0	-19.5	3.08 V	155	58.3	-3.8
4	19335.00	40.9 AV	54.0	-13.1	3.08 V	155	44.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	46.1 PK	88.2	-42.1	2.08 H	233	34.0	12.1
2	#12970.00	35.6 AV	68.2	-32.6	2.08 H	233	23.5	12.1
3	19455.00	53.4 PK	74.0	-20.6	3.17 H	127	57.3	-3.9
4	19455.00	42.5 AV	54.0	-11.5	3.17 H	127	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	47.9 PK	88.2	-40.3	2.27 V	132	35.8	12.1
2	#12970.00	38.3 AV	68.2	-29.9	2.27 V	132	26.2	12.1
3	19455.00	54.3 PK	74.0	-19.7	2.97 V	156	58.2	-3.9
4	19455.00	41.1 AV	54.0	-12.9	2.97 V	156	45.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	45.5 PK	88.2	-42.7	2.05 H	245	33.2	12.3
2	#13050.00	35.0 AV	68.2	-33.2	2.05 H	245	22.7	12.3
3	19575.00	52.4 PK	74.0	-21.6	3.07 H	145	56.1	-3.7
4	19575.00	42.0 AV	54.0	-12.0	3.07 H	145	45.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	47.8 PK	88.2	-40.4	2.29 V	155	35.5	12.3
2	#13050.00	38.2 AV	68.2	-30.0	2.29 V	155	25.9	12.3
3	19575.00	54.5 PK	74.0	-19.5	3.04 V	170	58.2	-3.7
4	19575.00	40.9 AV	54.0	-13.1	3.04 V	170	44.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	45.8 PK	88.2	-42.4	2.11 H	249	33.2	12.6
2	#13130.00	35.5 AV	68.2	-32.7	2.11 H	249	22.9	12.6
3	19695.00	52.7 PK	74.0	-21.3	3.12 H	147	56.2	-3.5
4	19695.00	42.1 AV	54.0	-11.9	3.12 H	147	45.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.4 PK	88.2	-39.8	2.29 V	138	35.8	12.6
2	#13130.00	38.7 AV	68.2	-29.5	2.29 V	138	26.1	12.6
3	19695.00	54.8 PK	74.0	-19.2	2.97 V	159	58.3	-3.5
4	19695.00	41.3 AV	54.0	-12.7	2.97 V	159	44.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	45.4 PK	88.2	-42.8	2.11 H	227	32.0	13.4
2	#13450.00	35.0 AV	68.2	-33.2	2.11 H	227	21.6	13.4
3	20175.00	52.9 PK	74.0	-21.1	3.08 H	127	56.1	-3.2
4	20175.00	42.5 AV	54.0	-11.5	3.08 H	127	45.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.3 PK	88.2	-39.9	2.21 V	149	34.9	13.4
2	#13450.00	38.6 AV	68.2	-29.6	2.21 V	149	25.2	13.4
3	20175.00	53.9 PK	74.0	-20.1	3.08 V	163	57.1	-3.2
4	20175.00	40.7 AV	54.0	-13.3	3.08 V	163	43.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	45.6 PK	88.2	-42.6	2.13 H	224	31.4	14.2
2	#13690.00	35.2 AV	68.2	-33.0	2.13 H	224	21.0	14.2
3	20535.00	53.8 PK	74.0	-20.2	3.16 H	134	56.7	-2.9
4	20535.00	42.3 AV	54.0	-11.7	3.16 H	134	45.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	47.7 PK	88.2	-40.5	2.23 V	138	33.5	14.2
2	#13690.00	37.9 AV	68.2	-30.3	2.23 V	138	23.7	14.2
3	20535.00	55.0 PK	74.0	-19.0	3.01 V	167	57.9	-2.9
4	20535.00	41.3 AV	54.0	-12.7	3.01 V	167	44.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	46.1 PK	88.2	-42.1	2.14 H	221	32.1	14.0
2	#13770.00	35.5 AV	68.2	-32.7	2.14 H	221	21.5	14.0
3	20655.00	53.9 PK	74.0	-20.1	3.12 H	122	56.7	-2.8
4	20655.00	42.4 AV	54.0	-11.6	3.12 H	122	45.2	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	47.9 PK	88.2	-40.3	2.25 V	134	33.9	14.0
2	#13770.00	37.9 AV	68.2	-30.3	2.25 V	134	23.9	14.0
3	20655.00	53.8 PK	74.0	-20.2	3.04 V	176	56.6	-2.8
4	20655.00	40.5 AV	54.0	-13.5	3.04 V	176	43.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	45.6 PK	88.2	-42.6	2.17 H	232	31.0	14.6
2	#14010.00	35.1 AV	68.2	-33.1	2.17 H	232	20.5	14.6
3	21015.00	52.9 PK	74.0	-21.1	3.14 H	130	55.2	-2.3
4	21015.00	42.5 AV	54.0	-11.5	3.14 H	130	44.8	-2.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.4 PK	88.2	-39.8	2.26 V	136	33.8	14.6
2	#14010.00	38.5 AV	68.2	-29.7	2.26 V	136	23.9	14.6
3	21015.00	54.4 PK	74.0	-19.6	2.98 V	166	56.7	-2.3
4	21015.00	40.9 AV	54.0	-13.1	2.98 V	166	43.2	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	45.9 PK	88.2	-42.3	2.11 H	252	31.5	14.4
2	#14170.00	35.5 AV	68.2	-32.7	2.11 H	252	21.1	14.4
3	21255.00	52.9 PK	74.0	-21.1	3.13 H	130	54.1	-1.2
4	21255.00	42.6 AV	54.0	-11.4	3.13 H	130	43.8	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.7 PK	88.2	-39.5	2.29 V	156	34.3	14.4
2	#14170.00	38.6 AV	68.2	-29.6	2.29 V	156	24.2	14.4
3	21255.00	54.1 PK	74.0	-19.9	3.00 V	156	55.3	-1.2
4	21255.00	40.9 AV	54.0	-13.1	3.00 V	156	42.1	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	43.8 PK	74.0	-30.2	2.16 H	156	32.3	11.5
2	11970.00	33.4 AV	54.0	-20.6	2.16 H	156	21.9	11.5
3	17955.00	48.7 PK	74.0	-25.3	2.15 H	136	23.0	25.7
4	17955.00	37.2 AV	54.0	-16.8	2.15 H	136	11.5	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	46.5 PK	74.0	-27.5	1.16 V	179	35.0	11.5
2	11970.00	36.2 AV	54.0	-17.8	1.16 V	179	24.7	11.5
3	17955.00	51.6 PK	74.0	-22.4	2.27 V	226	25.9	25.7
4	17955.00	40.7 AV	54.0	-13.3	2.27 V	226	15.0	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	44.1 PK	74.0	-29.9	2.17 H	149	31.7	12.4
2	12290.00	33.9 AV	54.0	-20.1	2.17 H	149	21.5	12.4
3	18435.00	48.8 PK	74.0	-25.2	2.11 H	130	52.9	-4.1
4	18435.00	37.4 AV	54.0	-16.6	2.11 H	130	41.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	45.9 PK	74.0	-28.1	1.12 V	182	33.5	12.4
2	12290.00	35.8 AV	54.0	-18.2	1.12 V	182	23.4	12.4
3	18435.00	51.3 PK	74.0	-22.7	2.26 V	238	55.4	-4.1
4	18435.00	40.3 AV	54.0	-13.7	2.26 V	238	44.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	43.5 PK	88.2	-44.7	2.11 H	143	31.9	11.6
2	#12770.00	33.3 AV	68.2	-34.9	2.11 H	143	21.7	11.6
3	19155.00	48.5 PK	74.0	-25.5	2.13 H	143	52.4	-3.9
4	19155.00	37.2 AV	54.0	-16.8	2.13 H	143	41.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.2 PK	88.2	-42.0	1.21 V	185	34.6	11.6
2	#12770.00	36.1 AV	68.2	-32.1	1.21 V	185	24.5	11.6
3	19155.00	51.8 PK	74.0	-22.2	2.25 V	235	55.7	-3.9
4	19155.00	40.6 AV	54.0	-13.4	2.25 V	235	44.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	44.0 PK	88.2	-44.2	2.14 H	152	31.7	12.3
2	#12930.00	33.8 AV	68.2	-34.4	2.14 H	152	21.5	12.3
3	19395.00	49.2 PK	74.0	-24.8	2.19 H	139	53.0	-3.8
4	19395.00	37.7 AV	54.0	-16.3	2.19 H	139	41.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.0 PK	88.2	-41.2	1.16 V	170	34.7	12.3
2	#12930.00	36.5 AV	68.2	-31.7	1.16 V	170	24.2	12.3
3	19395.00	51.2 PK	74.0	-22.8	2.26 V	235	55.0	-3.8
4	19395.00	40.5 AV	54.0	-13.5	2.26 V	235	44.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	44.3 PK	88.2	-43.9	2.10 H	159	31.9	12.4
2	#13090.00	33.6 AV	68.2	-34.6	2.10 H	159	21.2	12.4
3	19635.00	48.6 PK	74.0	-25.4	2.12 H	150	52.1	-3.5
4	19635.00	36.9 AV	54.0	-17.1	2.12 H	150	40.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	47.2 PK	88.2	-41.0	1.14 V	188	34.8	12.4
2	#13090.00	36.6 AV	68.2	-31.6	1.14 V	188	24.2	12.4
3	19635.00	51.0 PK	74.0	-23.0	2.26 V	233	54.5	-3.5
4	19635.00	40.4 AV	54.0	-13.6	2.26 V	233	43.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	43.2 PK	88.2	-45.0	2.12 H	143	29.9	13.3
2	#13410.00	33.0 AV	68.2	-35.2	2.12 H	143	19.7	13.3
3	20115.00	49.0 PK	74.0	-25.0	2.16 H	132	52.3	-3.3
4	20115.00	37.6 AV	54.0	-16.4	2.16 H	132	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	46.8 PK	88.2	-41.4	1.12 V	166	33.5	13.3
2	#13410.00	36.4 AV	68.2	-31.8	1.12 V	166	23.1	13.3
3	20115.00	51.4 PK	74.0	-22.6	2.24 V	219	54.7	-3.3
4	20115.00	40.4 AV	54.0	-13.6	2.24 V	219	43.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	43.9 PK	88.2	-44.3	2.15 H	157	29.9	14.0
2	#13730.00	33.7 AV	68.2	-34.5	2.15 H	157	19.7	14.0
3	20595.00	49.2 PK	74.0	-24.8	2.15 H	136	52.1	-2.9
4	20595.00	37.5 AV	54.0	-16.5	2.15 H	136	40.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	46.1 PK	88.2	-42.1	1.10 V	171	32.1	14.0
2	#13730.00	36.0 AV	68.2	-32.2	1.10 V	171	22.0	14.0
3	20595.00	51.6 PK	74.0	-22.4	2.31 V	238	54.5	-2.9
4	20595.00	40.7 AV	54.0	-13.3	2.31 V	238	43.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	44.1 PK	88.2	-44.1	2.19 H	172	29.9	14.2
2	#13890.00	33.5 AV	68.2	-34.7	2.19 H	172	19.3	14.2
3	20835.00	48.2 PK	74.0	-25.8	2.09 H	138	50.6	-2.4
4	20835.00	37.0 AV	54.0	-17.0	2.09 H	138	39.4	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	46.4 PK	88.2	-41.8	1.10 V	165	32.2	14.2
2	#13890.00	35.9 AV	68.2	-32.3	1.10 V	165	21.7	14.2
3	20835.00	52.0 PK	74.0	-22.0	2.32 V	215	54.4	-2.4
4	20835.00	40.9 AV	54.0	-13.1	2.32 V	215	43.3	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	43.6 PK	88.2	-44.6	2.15 H	159	28.9	14.7
2	#14050.00	33.3 AV	68.2	-34.9	2.15 H	159	18.6	14.7
3	21075.00	48.7 PK	74.0	-25.3	2.10 H	127	50.5	-1.8
4	21075.00	37.2 AV	54.0	-16.8	2.10 H	127	39.0	-1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	46.4 PK	88.2	-41.8	1.17 V	185	31.7	14.7
2	#14050.00	36.2 AV	68.2	-32.0	1.17 V	185	21.5	14.7
3	21075.00	51.2 PK	74.0	-22.8	2.28 V	230	53.0	-1.8
4	21075.00	40.4 AV	54.0	-13.6	2.28 V	230	42.2	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.4 PK	74.0	-30.6	2.19 H	154	31.5	11.9
2	12050.00	33.3 AV	54.0	-20.7	2.19 H	154	21.4	11.9
3	18075.00	48.4 PK	74.0	-25.6	2.05 H	141	53.1	-4.7
4	18075.00	37.1 AV	54.0	-16.9	2.05 H	141	41.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.3 PK	74.0	-27.7	1.11 V	171	34.4	11.9
2	12050.00	35.8 AV	54.0	-18.2	1.11 V	171	23.9	11.9
3	18075.00	51.4 PK	74.0	-22.6	2.21 V	227	56.1	-4.7
4	18075.00	40.6 AV	54.0	-13.4	2.21 V	227	45.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	44.1 PK	74.0	-29.9	2.14 H	157	32.3	11.8
2	12370.00	33.6 AV	54.0	-20.4	2.14 H	157	21.8	11.8
3	18555.00	48.5 PK	74.0	-25.5	2.14 H	135	52.4	-3.9
4	18555.00	37.1 AV	54.0	-16.9	2.14 H	135	41.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	46.9 PK	74.0	-27.1	1.15 V	165	35.1	11.8
2	12370.00	36.4 AV	54.0	-17.6	1.15 V	165	24.6	11.8
3	18555.00	52.1 PK	74.0	-21.9	2.26 V	215	56.0	-3.9
4	18555.00	40.9 AV	54.0	-13.1	2.26 V	215	44.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.5 PK	74.0	-29.5	2.12 H	149	33.0	11.5
2	12690.00	33.9 AV	54.0	-20.1	2.12 H	149	22.4	11.5
3	19035.00	47.9 PK	74.0	-26.1	2.07 H	126	51.6	-3.7
4	19035.00	37.4 AV	54.0	-16.6	2.07 H	126	41.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.1 PK	74.0	-26.9	1.12 V	176	35.6	11.5
2	12690.00	36.5 AV	54.0	-17.5	1.12 V	176	25.0	11.5
3	19035.00	51.0 PK	74.0	-23.0	2.31 V	226	54.7	-3.7
4	19035.00	40.3 AV	54.0	-13.7	2.31 V	226	44.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	43.8 PK	88.2	-44.4	2.16 H	152	31.8	12.0
2	#13010.00	33.4 AV	68.2	-34.8	2.16 H	152	21.4	12.0
3	19515.00	47.2 PK	74.0	-26.8	2.07 H	139	51.1	-3.9
4	19515.00	36.9 AV	54.0	-17.1	2.07 H	139	40.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	45.7 PK	88.2	-42.5	1.15 V	192	33.7	12.0
2	#13010.00	35.7 AV	68.2	-32.5	1.15 V	192	23.7	12.0
3	19515.00	52.0 PK	74.0	-22.0	2.25 V	239	55.9	-3.9
4	19515.00	41.1 AV	54.0	-12.9	2.25 V	239	45.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.6 PK	74.0	-29.4	2.15 H	134	31.5	13.1
2	13330.00	34.2 AV	54.0	-19.8	2.15 H	134	21.1	13.1
3	19995.00	47.8 PK	74.0	-26.2	2.13 H	133	51.0	-3.2
4	19995.00	37.2 AV	54.0	-16.8	2.13 H	133	40.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.4 PK	74.0	-27.6	1.20 V	164	33.3	13.1
2	13330.00	36.2 AV	54.0	-17.8	1.20 V	164	23.1	13.1
3	19995.00	51.6 PK	74.0	-22.4	2.32 V	231	54.8	-3.2
4	19995.00	40.4 AV	54.0	-13.6	2.32 V	231	43.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	44.5 PK	88.2	-43.7	2.14 H	128	30.5	14.0
2	#13650.00	34.0 AV	68.2	-34.2	2.14 H	128	20.0	14.0
3	20475.00	47.1 PK	74.0	-26.9	2.16 H	136	50.1	-3.0
4	20475.00	36.7 AV	54.0	-17.3	2.16 H	136	39.7	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.9 PK	88.2	-41.3	1.17 V	172	32.9	14.0
2	#13650.00	36.7 AV	68.2	-31.5	1.17 V	172	22.7	14.0
3	20475.00	51.9 PK	74.0	-22.1	2.28 V	211	54.9	-3.0
4	20475.00	40.7 AV	54.0	-13.3	2.28 V	211	43.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.0 PK	88.2	-44.2	2.16 H	147	29.6	14.4
2	#13970.00	33.8 AV	68.2	-34.4	2.16 H	147	19.4	14.4
3	20955.00	48.3 PK	74.0	-25.7	2.10 H	148	50.6	-2.3
4	20955.00	37.5 AV	54.0	-16.5	2.10 H	148	39.8	-2.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.3 PK	88.2	-41.9	1.17 V	170	31.9	14.4
2	#13970.00	36.0 AV	68.2	-32.2	1.17 V	170	21.6	14.4
3	20955.00	51.8 PK	74.0	-22.2	2.28 V	239	54.1	-2.3
4	20955.00	40.9 AV	54.0	-13.1	2.28 V	239	43.2	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

(under control of a low-power indoor AP)

Mode B

2S2T

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	43.8 PK	74.0	-30.2	2.19 H	178	32.2	11.6
2	11870.00	33.3 AV	54.0	-20.7	2.19 H	178	21.7	11.6
3	17805.00	48.2 PK	74.0	-25.8	2.14 H	125	26.4	21.8
4	17805.00	36.8 AV	54.0	-17.2	2.14 H	125	15.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.1 PK	74.0	-27.9	1.22 V	198	34.5	11.6
2	11870.00	35.7 AV	54.0	-18.3	1.22 V	198	24.1	11.6
3	17805.00	51.1 PK	74.0	-22.9	2.24 V	232	29.3	21.8
4	17805.00	40.4 AV	54.0	-13.6	2.24 V	232	18.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.1 PK	74.0	-29.9	2.19 H	172	32.6	11.5
2	11910.00	33.5 AV	54.0	-20.5	2.19 H	172	22.0	11.5
3	17865.00	48.2 PK	74.0	-25.8	2.09 H	138	25.0	23.2
4	17865.00	37.0 AV	54.0	-17.0	2.09 H	138	13.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.4 PK	74.0	-27.6	1.17 V	185	34.9	11.5
2	11910.00	36.2 AV	54.0	-17.8	1.17 V	185	24.7	11.5
3	17865.00	51.2 PK	74.0	-22.8	2.28 V	230	28.0	23.2
4	17865.00	40.4 AV	54.0	-13.6	2.28 V	230	17.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.0 PK	88.2	-44.2	2.15 H	164	32.1	11.9
2	#12830.00	33.4 AV	68.2	-34.8	2.15 H	164	21.5	11.9
3	19245.00	48.4 PK	74.0	-25.6	2.08 H	149	52.2	-3.8
4	19245.00	37.1 AV	54.0	-16.9	2.08 H	149	40.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.2 PK	88.2	-42.0	1.12 V	170	34.3	11.9
2	#12830.00	35.9 AV	68.2	-32.3	1.12 V	170	24.0	11.9
3	19245.00	51.1 PK	74.0	-22.9	2.30 V	239	54.9	-3.8
4	19245.00	40.1 AV	54.0	-13.9	2.30 V	239	43.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.1 PK	88.2	-44.1	2.13 H	186	32.0	12.1
2	#12870.00	33.3 AV	68.2	-34.9	2.13 H	186	21.2	12.1
3	19305.00	48.2 PK	74.0	-25.8	2.09 H	148	51.9	-3.7
4	19305.00	37.1 AV	54.0	-16.9	2.09 H	148	40.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.7 PK	88.2	-42.5	1.17 V	190	33.6	12.1
2	#12870.00	35.8 AV	68.2	-32.4	1.17 V	190	23.7	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.30 V	216	54.7	-3.7
4	19305.00	40.4 AV	54.0	-13.6	2.30 V	216	44.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	43.9 PK	88.2	-44.3	2.18 H	174	31.8	12.1
2	#13030.00	33.4 AV	68.2	-34.8	2.18 H	174	21.3	12.1
3	19545.00	48.5 PK	74.0	-25.5	2.13 H	123	52.6	-4.1
4	19545.00	37.4 AV	54.0	-16.6	2.13 H	123	41.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.6 PK	88.2	-41.6	1.18 V	186	34.5	12.1
2	#13030.00	36.6 AV	68.2	-31.6	1.18 V	186	24.5	12.1
3	19545.00	51.3 PK	74.0	-22.7	2.29 V	245	55.4	-4.1
4	19545.00	40.7 AV	54.0	-13.3	2.29 V	245	44.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.5 PK	88.2	-43.7	2.22 H	156	32.1	12.4
2	#13070.00	33.7 AV	68.2	-34.5	2.22 H	156	21.3	12.4
3	19605.00	47.9 PK	74.0	-26.1	2.07 H	142	51.9	-4.0
4	19605.00	36.5 AV	54.0	-17.5	2.07 H	142	40.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.1 PK	88.2	-42.1	1.18 V	191	33.7	12.4
2	#13070.00	36.0 AV	68.2	-32.2	1.18 V	191	23.6	12.4
3	19605.00	50.9 PK	74.0	-23.1	2.25 V	226	54.9	-4.0
4	19605.00	40.0 AV	54.0	-14.0	2.25 V	226	44.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	44.3 PK	88.2	-43.9	2.14 H	182	30.3	14.0
2	#13750.00	33.9 AV	68.2	-34.3	2.14 H	182	19.9	14.0
3	20625.00	48.4 PK	74.0	-25.6	2.15 H	130	51.7	-3.3
4	20625.00	37.0 AV	54.0	-17.0	2.15 H	130	40.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.3 PK	88.2	-41.9	1.22 V	173	32.3	14.0
2	#13750.00	36.2 AV	68.2	-32.0	1.22 V	173	22.2	14.0
3	20625.00	50.6 PK	74.0	-23.4	2.23 V	223	53.9	-3.3
4	20625.00	40.1 AV	54.0	-13.9	2.23 V	223	43.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.0 PK	88.2	-44.2	2.23 H	172	29.6	14.4
2	#13990.00	33.2 AV	68.2	-35.0	2.23 H	172	18.8	14.4
3	20985.00	48.1 PK	74.0	-25.9	2.13 H	148	50.9	-2.8
4	20985.00	37.2 AV	54.0	-16.8	2.13 H	148	40.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.5 PK	88.2	-41.7	1.14 V	183	32.1	14.4
2	#13990.00	36.3 AV	68.2	-31.9	1.14 V	183	21.9	14.4
3	20985.00	50.8 PK	74.0	-23.2	2.30 V	229	53.6	-2.8
4	20985.00	40.0 AV	54.0	-14.0	2.30 V	229	42.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.0 PK	88.2	-44.2	2.19 H	168	29.8	14.2
2	#14230.00	33.3 AV	68.2	-34.9	2.19 H	168	19.1	14.2
3	21345.00	48.2 PK	74.0	-25.8	2.06 H	149	49.8	-1.6
4	21345.00	37.0 AV	54.0	-17.0	2.06 H	149	38.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.7 PK	88.2	-41.5	1.15 V	186	32.5	14.2
2	#14230.00	36.5 AV	68.2	-31.7	1.15 V	186	22.3	14.2
3	21345.00	51.4 PK	74.0	-22.6	2.33 V	237	53.0	-1.6
4	21345.00	40.5 AV	54.0	-13.5	2.33 V	237	42.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	42.9 PK	74.0	-31.1	2.14 H	180	31.3	11.6
2	11870.00	35.2 AV	54.0	-18.8	2.14 H	180	23.6	11.6
3	17805.00	48.8 PK	74.0	-25.2	2.05 H	124	27.0	21.8
4	17805.00	37.5 AV	54.0	-16.5	2.05 H	124	15.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.9 PK	74.0	-28.1	1.14 V	160	34.3	11.6
2	11870.00	35.4 AV	54.0	-18.6	1.14 V	160	23.8	11.6
3	17805.00	50.5 PK	74.0	-23.5	2.30 V	259	28.7	21.8
4	17805.00	39.7 AV	54.0	-14.3	2.30 V	259	17.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.7 PK	74.0	-30.3	2.18 H	174	32.2	11.5
2	11910.00	33.0 AV	54.0	-21.0	2.18 H	174	21.5	11.5
3	17865.00	48.3 PK	74.0	-25.7	2.04 H	127	25.1	23.2
4	17865.00	37.0 AV	54.0	-17.0	2.04 H	127	13.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.2 PK	74.0	-27.8	1.11 V	169	34.7	11.5
2	11910.00	35.7 AV	54.0	-18.3	1.11 V	169	24.2	11.5
3	17865.00	50.5 PK	74.0	-23.5	2.25 V	245	27.3	23.2
4	17865.00	39.9 AV	54.0	-14.1	2.25 V	245	16.7	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.1 PK	88.2	-44.1	2.14 H	163	32.2	11.9
2	#12830.00	33.8 AV	68.2	-34.4	2.14 H	163	21.9	11.9
3	19245.00	48.0 PK	74.0	-26.0	2.06 H	152	51.8	-3.8
4	19245.00	36.8 AV	54.0	-17.2	2.06 H	152	40.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.4 PK	88.2	-41.8	1.11 V	181	34.5	11.9
2	#12830.00	36.3 AV	68.2	-31.9	1.11 V	181	24.4	11.9
3	19245.00	51.6 PK	74.0	-22.4	2.25 V	232	55.4	-3.8
4	19245.00	40.8 AV	54.0	-13.2	2.25 V	232	44.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.3 PK	88.2	-44.9	2.17 H	164	31.2	12.1
2	#12870.00	33.0 AV	68.2	-35.2	2.17 H	164	20.9	12.1
3	19305.00	47.9 PK	74.0	-26.1	2.04 H	133	51.6	-3.7
4	19305.00	36.8 AV	54.0	-17.2	2.04 H	133	40.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.7 PK	88.2	-41.5	1.20 V	197	34.6	12.1
2	#12870.00	36.6 AV	68.2	-31.6	1.20 V	197	24.5	12.1
3	19305.00	51.9 PK	74.0	-22.1	2.27 V	222	55.6	-3.7
4	19305.00	40.8 AV	54.0	-13.2	2.27 V	222	44.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.3 PK	88.2	-43.9	2.18 H	170	32.2	12.1
2	#13030.00	33.6 AV	68.2	-34.6	2.18 H	170	21.5	12.1
3	19545.00	48.1 PK	74.0	-25.9	2.10 H	151	52.2	-4.1
4	19545.00	37.1 AV	54.0	-16.9	2.10 H	151	41.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.2 PK	88.2	-42.0	1.19 V	181	34.1	12.1
2	#13030.00	36.1 AV	68.2	-32.1	1.19 V	181	24.0	12.1
3	19545.00	51.3 PK	74.0	-22.7	2.24 V	243	55.4	-4.1
4	19545.00	40.5 AV	54.0	-13.5	2.24 V	243	44.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.0 PK	88.2	-44.2	2.24 H	161	31.6	12.4
2	#13070.00	33.1 AV	68.2	-35.1	2.24 H	161	20.7	12.4
3	19605.00	48.1 PK	74.0	-25.9	2.03 H	123	52.1	-4.0
4	19605.00	37.1 AV	54.0	-16.9	2.03 H	123	41.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.7 PK	88.2	-41.5	1.21 V	186	34.3	12.4
2	#13070.00	36.5 AV	68.2	-31.7	1.21 V	186	24.1	12.4
3	19605.00	51.6 PK	74.0	-22.4	2.24 V	217	55.6	-4.0
4	19605.00	40.6 AV	54.0	-13.4	2.24 V	217	44.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	44.5 PK	88.2	-43.7	2.19 H	161	30.5	14.0
2	#13750.00	33.8 AV	68.2	-34.4	2.19 H	161	19.8	14.0
3	20625.00	48.6 PK	74.0	-25.4	2.11 H	130	51.9	-3.3
4	20625.00	37.3 AV	54.0	-16.7	2.11 H	130	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.3 PK	88.2	-41.9	1.16 V	204	32.3	14.0
2	#13750.00	36.2 AV	68.2	-32.0	1.16 V	204	22.2	14.0
3	20625.00	50.8 PK	74.0	-23.2	2.30 V	240	54.1	-3.3
4	20625.00	40.2 AV	54.0	-13.8	2.30 V	240	43.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.5 PK	88.2	-44.7	2.23 H	171	29.1	14.4
2	#13990.00	33.0 AV	68.2	-35.2	2.23 H	171	18.6	14.4
3	20985.00	47.7 PK	74.0	-26.3	2.13 H	129	50.5	-2.8
4	20985.00	36.8 AV	54.0	-17.2	2.13 H	129	39.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.6 PK	88.2	-41.6	1.15 V	196	32.2	14.4
2	#13990.00	36.5 AV	68.2	-31.7	1.15 V	196	22.1	14.4
3	20985.00	51.6 PK	74.0	-22.4	2.26 V	217	54.4	-2.8
4	20985.00	40.5 AV	54.0	-13.5	2.26 V	217	43.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	42.8 PK	88.2	-45.4	2.25 H	165	28.6	14.2
2	#14230.00	32.6 AV	68.2	-35.6	2.25 H	165	18.4	14.2
3	21345.00	48.0 PK	74.0	-26.0	2.17 H	122	49.6	-1.6
4	21345.00	36.8 AV	54.0	-17.2	2.17 H	122	38.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.3 PK	88.2	-41.9	1.12 V	194	32.1	14.2
2	#14230.00	36.1 AV	68.2	-32.1	1.12 V	194	21.9	14.2
3	21345.00	51.7 PK	74.0	-22.3	2.22 V	216	53.3	-1.6
4	21345.00	40.4 AV	54.0	-13.6	2.22 V	216	42.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.5 PK	74.0	-29.5	2.19 H	183	32.9	11.6
2	11870.00	33.8 AV	54.0	-20.2	2.19 H	183	22.2	11.6
3	17805.00	47.7 PK	74.0	-26.3	2.00 H	113	25.9	21.8
4	17805.00	36.1 AV	54.0	-17.9	2.00 H	113	14.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.9 PK	74.0	-28.1	1.23 V	186	34.3	11.6
2	11870.00	36.6 AV	54.0	-17.4	1.23 V	186	25.0	11.6
3	17805.00	50.6 PK	74.0	-23.4	2.29 V	218	28.8	21.8
4	17805.00	40.1 AV	54.0	-13.9	2.29 V	218	18.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.4 PK	74.0	-29.6	2.17 H	181	32.9	11.5
2	11910.00	33.7 AV	54.0	-20.3	2.17 H	181	22.2	11.5
3	17865.00	48.0 PK	74.0	-26.0	2.06 H	124	24.8	23.2
4	17865.00	36.5 AV	54.0	-17.5	2.06 H	124	13.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.4 PK	74.0	-27.6	1.18 V	193	34.9	11.5
2	11910.00	36.1 AV	54.0	-17.9	1.18 V	193	24.6	11.5
3	17865.00	51.0 PK	74.0	-23.0	2.25 V	222	27.8	23.2
4	17865.00	40.3 AV	54.0	-13.7	2.25 V	222	17.1	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.7 PK	88.2	-44.5	2.16 H	170	31.8	11.9
2	#12830.00	33.2 AV	68.2	-35.0	2.16 H	170	21.3	11.9
3	19245.00	47.8 PK	74.0	-26.2	2.08 H	151	51.6	-3.8
4	19245.00	36.8 AV	54.0	-17.2	2.08 H	151	40.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.7 PK	88.2	-41.5	1.12 V	177	34.8	11.9
2	#12830.00	36.4 AV	68.2	-31.8	1.12 V	177	24.5	11.9
3	19245.00	50.9 PK	74.0	-23.1	2.33 V	239	54.7	-3.8
4	19245.00	40.1 AV	54.0	-13.9	2.33 V	239	43.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.6 PK	88.2	-44.6	2.21 H	188	31.5	12.1
2	#12870.00	33.1 AV	68.2	-35.1	2.21 H	188	21.0	12.1
3	19305.00	47.8 PK	74.0	-26.2	2.06 H	123	51.5	-3.7
4	19305.00	36.6 AV	54.0	-17.4	2.06 H	123	40.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.1 PK	88.2	-42.1	1.21 V	177	34.0	12.1
2	#12870.00	35.8 AV	68.2	-32.4	1.21 V	177	23.7	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.32 V	216	54.7	-3.7
4	19305.00	40.2 AV	54.0	-13.8	2.32 V	216	43.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.3 PK	88.2	-43.9	2.14 H	158	32.2	12.1
2	#13030.00	33.4 AV	68.2	-34.8	2.14 H	158	21.3	12.1
3	19545.00	48.7 PK	74.0	-25.3	2.06 H	133	52.8	-4.1
4	19545.00	37.3 AV	54.0	-16.7	2.06 H	133	41.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.6 PK	88.2	-41.6	1.20 V	175	34.5	12.1
2	#13030.00	36.5 AV	68.2	-31.7	1.20 V	175	24.4	12.1
3	19545.00	51.3 PK	74.0	-22.7	2.29 V	243	55.4	-4.1
4	19545.00	40.3 AV	54.0	-13.7	2.29 V	243	44.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.9 PK	88.2	-44.3	2.16 H	186	31.5	12.4
2	#13070.00	33.2 AV	68.2	-35.0	2.16 H	186	20.8	12.4
3	19605.00	48.4 PK	74.0	-25.6	2.04 H	145	52.4	-4.0
4	19605.00	37.3 AV	54.0	-16.7	2.04 H	145	41.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.9 PK	88.2	-41.3	1.17 V	170	34.5	12.4
2	#13070.00	36.7 AV	68.2	-31.5	1.17 V	170	24.3	12.4
3	19605.00	50.7 PK	74.0	-23.3	2.27 V	237	54.7	-4.0
4	19605.00	40.1 AV	54.0	-13.9	2.27 V	237	44.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	43.9 PK	88.2	-44.3	2.15 H	172	29.9	14.0
2	#13750.00	33.2 AV	68.2	-35.0	2.15 H	172	19.2	14.0
3	20625.00	48.6 PK	74.0	-25.4	2.04 H	142	51.9	-3.3
4	20625.00	37.3 AV	54.0	-16.7	2.04 H	142	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.4 PK	88.2	-41.8	1.22 V	203	32.4	14.0
2	#13750.00	36.2 AV	68.2	-32.0	1.22 V	203	22.2	14.0
3	20625.00	50.8 PK	74.0	-23.2	2.29 V	227	54.1	-3.3
4	20625.00	40.1 AV	54.0	-13.9	2.29 V	227	43.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.1 PK	88.2	-44.1	2.20 H	185	29.7	14.4
2	#13990.00	33.6 AV	68.2	-34.6	2.20 H	185	19.2	14.4
3	20985.00	47.8 PK	74.0	-26.2	2.11 H	146	50.6	-2.8
4	20985.00	36.6 AV	54.0	-17.4	2.11 H	146	39.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.2 PK	88.2	-42.0	1.16 V	195	31.8	14.4
2	#13990.00	36.2 AV	68.2	-32.0	1.16 V	195	21.8	14.4
3	20985.00	51.1 PK	74.0	-22.9	2.25 V	231	53.9	-2.8
4	20985.00	40.5 AV	54.0	-13.5	2.25 V	231	43.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.7 PK	88.2	-44.5	2.21 H	177	29.5	14.2
2	#14230.00	33.1 AV	68.2	-35.1	2.21 H	177	18.9	14.2
3	21345.00	47.7 PK	74.0	-26.3	2.12 H	143	49.3	-1.6
4	21345.00	36.5 AV	54.0	-17.5	2.12 H	143	38.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.2 PK	88.2	-42.0	1.16 V	188	32.0	14.2
2	#14230.00	36.1 AV	68.2	-32.1	1.16 V	188	21.9	14.2
3	21345.00	51.6 PK	74.0	-22.4	2.31 V	229	53.2	-1.6
4	21345.00	40.7 AV	54.0	-13.3	2.31 V	229	42.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

2S2T

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.8 PK	74.0	-29.2	2.25 H	149	33.2	11.6
2	11870.00	34.2 AV	54.0	-19.8	2.25 H	149	22.6	11.6
3	17805.00	47.7 PK	74.0	-26.3	2.13 H	127	25.9	21.8
4	17805.00	36.8 AV	54.0	-17.2	2.13 H	127	15.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.0 PK	74.0	-27.0	1.15 V	200	35.4	11.6
2	11870.00	36.7 AV	54.0	-17.3	1.15 V	200	25.1	11.6
3	17805.00	50.9 PK	74.0	-23.1	2.30 V	220	29.1	21.8
4	17805.00	39.7 AV	54.0	-14.3	2.30 V	220	17.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.5 PK	74.0	-29.5	2.26 H	163	33.0	11.5
2	11910.00	33.7 AV	54.0	-20.3	2.26 H	163	22.2	11.5
3	17865.00	47.9 PK	74.0	-26.1	2.13 H	117	24.7	23.2
4	17865.00	37.0 AV	54.0	-17.0	2.13 H	117	13.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.8 PK	74.0	-27.2	1.13 V	195	35.3	11.5
2	11910.00	36.7 AV	54.0	-17.3	1.13 V	195	25.2	11.5
3	17865.00	51.2 PK	74.0	-22.8	2.32 V	219	28.0	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.32 V	219	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.4 PK	88.2	-44.8	2.19 H	169	31.5	11.9
2	#12830.00	32.9 AV	68.2	-35.3	2.19 H	169	21.0	11.9
3	19245.00	48.3 PK	74.0	-25.7	2.03 H	129	52.1	-3.8
4	19245.00	37.2 AV	54.0	-16.8	2.03 H	129	41.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.3 PK	88.2	-41.9	1.13 V	180	34.4	11.9
2	#12830.00	36.3 AV	68.2	-31.9	1.13 V	180	24.4	11.9
3	19245.00	51.5 PK	74.0	-22.5	2.25 V	237	55.3	-3.8
4	19245.00	40.6 AV	54.0	-13.4	2.25 V	237	44.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.8 PK	88.2	-44.4	2.27 H	156	31.7	12.1
2	#12870.00	33.0 AV	68.2	-35.2	2.27 H	156	20.9	12.1
3	19305.00	47.8 PK	74.0	-26.2	2.10 H	127	51.5	-3.7
4	19305.00	37.0 AV	54.0	-17.0	2.10 H	127	40.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.8 PK	88.2	-41.4	1.17 V	173	34.7	12.1
2	#12870.00	36.7 AV	68.2	-31.5	1.17 V	173	24.6	12.1
3	19305.00	50.6 PK	74.0	-23.4	2.32 V	229	54.3	-3.7
4	19305.00	40.0 AV	54.0	-14.0	2.32 V	229	43.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.2 PK	88.2	-44.0	2.25 H	168	32.1	12.1
2	#13030.00	33.4 AV	68.2	-34.8	2.25 H	168	21.3	12.1
3	19545.00	48.3 PK	74.0	-25.7	2.05 H	125	52.4	-4.1
4	19545.00	37.3 AV	54.0	-16.7	2.05 H	125	41.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.9 PK	88.2	-41.3	1.21 V	183	34.8	12.1
2	#13030.00	36.6 AV	68.2	-31.6	1.21 V	183	24.5	12.1
3	19545.00	51.6 PK	74.0	-22.4	2.28 V	230	55.7	-4.1
4	19545.00	40.6 AV	54.0	-13.4	2.28 V	230	44.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.5 PK	88.2	-43.7	2.19 H	169	32.1	12.4
2	#13070.00	33.7 AV	68.2	-34.5	2.19 H	169	21.3	12.4
3	19605.00	48.0 PK	74.0	-26.0	2.07 H	119	52.0	-4.0
4	19605.00	36.7 AV	54.0	-17.3	2.07 H	119	40.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.5 PK	88.2	-41.7	1.19 V	201	34.1	12.4
2	#13070.00	36.5 AV	68.2	-31.7	1.19 V	201	24.1	12.4
3	19605.00	50.7 PK	74.0	-23.3	2.37 V	233	54.7	-4.0
4	19605.00	39.8 AV	54.0	-14.2	2.37 V	233	43.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	43.4 PK	88.2	-44.8	2.20 H	165	29.4	14.0
2	#13750.00	32.9 AV	68.2	-35.3	2.20 H	165	18.9	14.0
3	20625.00	47.7 PK	74.0	-26.3	2.11 H	145	51.0	-3.3
4	20625.00	36.8 AV	54.0	-17.2	2.11 H	145	40.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.9 PK	88.2	-42.3	1.14 V	187	31.9	14.0
2	#13750.00	36.0 AV	68.2	-32.2	1.14 V	187	22.0	14.0
3	20625.00	50.6 PK	74.0	-23.4	2.31 V	231	53.9	-3.3
4	20625.00	40.0 AV	54.0	-14.0	2.31 V	231	43.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.8 PK	88.2	-44.4	2.19 H	173	29.4	14.4
2	#13990.00	33.2 AV	68.2	-35.0	2.19 H	173	18.8	14.4
3	20985.00	48.3 PK	74.0	-25.7	2.04 H	137	51.1	-2.8
4	20985.00	37.2 AV	54.0	-16.8	2.04 H	137	40.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.5 PK	88.2	-41.7	1.17 V	189	32.1	14.4
2	#13990.00	36.0 AV	68.2	-32.2	1.17 V	189	21.6	14.4
3	20985.00	51.4 PK	74.0	-22.6	2.28 V	221	54.2	-2.8
4	20985.00	40.7 AV	54.0	-13.3	2.28 V	221	43.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.0 PK	88.2	-44.2	2.28 H	150	29.8	14.2
2	#14230.00	33.6 AV	68.2	-34.6	2.28 H	150	19.4	14.2
3	21345.00	48.1 PK	74.0	-25.9	2.07 H	125	49.7	-1.6
4	21345.00	37.0 AV	54.0	-17.0	2.07 H	125	38.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.7 PK	88.2	-42.5	1.09 V	203	31.5	14.2
2	#14230.00	35.7 AV	68.2	-32.5	1.09 V	203	21.5	14.2
3	21345.00	50.9 PK	74.0	-23.1	2.26 V	234	52.5	-1.6
4	21345.00	40.3 AV	54.0	-13.7	2.26 V	234	41.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.0 PK	74.0	-30.0	2.27 H	171	32.4	11.6
2	11870.00	33.5 AV	54.0	-20.5	2.27 H	171	21.9	11.6
3	17805.00	47.4 PK	74.0	-26.6	2.05 H	138	25.6	21.8
4	17805.00	36.2 AV	54.0	-17.8	2.05 H	138	14.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.3 PK	74.0	-26.7	1.19 V	191	35.7	11.6
2	11870.00	37.0 AV	54.0	-17.0	1.19 V	191	25.4	11.6
3	17805.00	51.3 PK	74.0	-22.7	2.20 V	210	29.5	21.8
4	17805.00	40.0 AV	54.0	-14.0	2.20 V	210	18.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.8 PK	74.0	-30.2	2.21 H	161	32.3	11.5
2	11910.00	33.4 AV	54.0	-20.6	2.21 H	161	21.9	11.5
3	17865.00	47.6 PK	74.0	-26.4	2.09 H	123	24.4	23.2
4	17865.00	36.5 AV	54.0	-17.5	2.09 H	123	13.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.8 PK	74.0	-27.2	1.19 V	194	35.3	11.5
2	11910.00	36.5 AV	54.0	-17.5	1.19 V	194	25.0	11.5
3	17865.00	51.2 PK	74.0	-22.8	2.23 V	217	28.0	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.23 V	217	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.9 PK	88.2	-44.3	2.22 H	159	32.0	11.9
2	#12830.00	33.1 AV	68.2	-35.1	2.22 H	159	21.2	11.9
3	19245.00	48.6 PK	74.0	-25.4	2.10 H	144	52.4	-3.8
4	19245.00	37.4 AV	54.0	-16.6	2.10 H	144	41.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.1 PK	88.2	-42.1	1.15 V	185	34.2	11.9
2	#12830.00	35.9 AV	68.2	-32.3	1.15 V	185	24.0	11.9
3	19245.00	51.5 PK	74.0	-22.5	2.28 V	234	55.3	-3.8
4	19245.00	40.4 AV	54.0	-13.6	2.28 V	234	44.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.8 PK	88.2	-44.4	2.19 H	183	31.7	12.1
2	#12870.00	33.5 AV	68.2	-34.7	2.19 H	183	21.4	12.1
3	19305.00	48.7 PK	74.0	-25.3	2.12 H	154	52.4	-3.7
4	19305.00	37.2 AV	54.0	-16.8	2.12 H	154	40.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.7 PK	88.2	-41.5	1.13 V	199	34.6	12.1
2	#12870.00	36.3 AV	68.2	-31.9	1.13 V	199	24.2	12.1
3	19305.00	51.9 PK	74.0	-22.1	2.24 V	242	55.6	-3.7
4	19305.00	40.9 AV	54.0	-13.1	2.24 V	242	44.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	43.9 PK	88.2	-44.3	2.22 H	162	31.8	12.1
2	#13030.00	33.3 AV	68.2	-34.9	2.22 H	162	21.2	12.1
3	19545.00	47.8 PK	74.0	-26.2	2.07 H	131	51.9	-4.1
4	19545.00	36.8 AV	54.0	-17.2	2.07 H	131	40.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.2 PK	88.2	-42.0	1.23 V	161	34.1	12.1
2	#13030.00	35.6 AV	68.2	-32.6	1.23 V	161	23.5	12.1
3	19545.00	50.7 PK	74.0	-23.3	2.22 V	249	54.8	-4.1
4	19545.00	40.0 AV	54.0	-14.0	2.22 V	249	44.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.0 PK	88.2	-44.2	2.14 H	186	31.6	12.4
2	#13070.00	33.3 AV	68.2	-34.9	2.14 H	186	20.9	12.4
3	19605.00	48.1 PK	74.0	-25.9	2.11 H	147	52.1	-4.0
4	19605.00	36.8 AV	54.0	-17.2	2.11 H	147	40.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.4 PK	88.2	-41.8	1.23 V	175	34.0	12.4
2	#13070.00	35.9 AV	68.2	-32.3	1.23 V	175	23.5	12.4
3	19605.00	51.1 PK	74.0	-22.9	2.26 V	240	55.1	-4.0
4	19605.00	40.4 AV	54.0	-13.6	2.26 V	240	44.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	44.0 PK	88.2	-44.2	2.24 H	158	30.0	14.0
2	#13750.00	33.7 AV	68.2	-34.5	2.24 H	158	19.7	14.0
3	20625.00	47.2 PK	74.0	-26.8	2.13 H	137	50.5	-3.3
4	20625.00	36.4 AV	54.0	-17.6	2.13 H	137	39.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.2 PK	88.2	-42.0	1.16 V	194	32.2	14.0
2	#13750.00	35.9 AV	68.2	-32.3	1.16 V	194	21.9	14.0
3	20625.00	51.3 PK	74.0	-22.7	2.31 V	244	54.6	-3.3
4	20625.00	40.3 AV	54.0	-13.7	2.31 V	244	43.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.5 PK	88.2	-44.7	2.24 H	160	29.1	14.4
2	#13990.00	32.8 AV	68.2	-35.4	2.24 H	160	18.4	14.4
3	20985.00	47.7 PK	74.0	-26.3	2.09 H	139	50.5	-2.8
4	20985.00	36.8 AV	54.0	-17.2	2.09 H	139	39.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.0 PK	88.2	-42.2	1.15 V	195	31.6	14.4
2	#13990.00	36.1 AV	68.2	-32.1	1.15 V	195	21.7	14.4
3	20985.00	50.3 PK	74.0	-23.7	2.27 V	222	53.1	-2.8
4	20985.00	39.8 AV	54.0	-14.2	2.27 V	222	42.6	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.5 PK	88.2	-43.7	2.24 H	151	30.3	14.2
2	#14230.00	33.6 AV	68.2	-34.6	2.24 H	151	19.4	14.2
3	21345.00	48.1 PK	74.0	-25.9	2.07 H	125	49.7	-1.6
4	21345.00	37.0 AV	54.0	-17.0	2.07 H	125	38.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.4 PK	88.2	-41.8	1.13 V	193	32.2	14.2
2	#14230.00	36.0 AV	68.2	-32.2	1.13 V	193	21.8	14.2
3	21345.00	51.0 PK	74.0	-23.0	2.33 V	226	52.6	-1.6
4	21345.00	40.3 AV	54.0	-13.7	2.33 V	226	41.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	43.6 PK	74.0	-30.4	2.21 H	161	32.1	11.5
2	11970.00	33.1 AV	54.0	-20.9	2.21 H	161	21.6	11.5
3	17955.00	47.5 PK	74.0	-26.5	2.11 H	141	21.8	25.7
4	17955.00	36.6 AV	54.0	-17.4	2.11 H	141	10.9	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.3 PK	74.0	-28.7	1.19 V	188	33.8	11.5
2	11970.00	35.6 AV	54.0	-18.4	1.19 V	188	24.1	11.5
3	17955.00	50.8 PK	74.0	-23.2	2.32 V	243	25.1	25.7
4	17955.00	40.2 AV	54.0	-13.8	2.32 V	243	14.5	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	43.9 PK	88.2	-44.3	2.25 H	173	32.3	11.6
2	#12770.00	33.4 AV	68.2	-34.8	2.25 H	173	21.8	11.6
3	19155.00	47.5 PK	74.0	-26.5	2.03 H	147	51.3	-3.8
4	19155.00	36.5 AV	54.0	-17.5	2.03 H	147	40.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.1 PK	88.2	-42.1	1.14 V	187	34.5	11.6
2	#12770.00	36.4 AV	68.2	-31.8	1.14 V	187	24.8	11.6
3	19155.00	50.2 PK	74.0	-23.8	2.34 V	220	54.0	-3.8
4	19155.00	39.8 AV	54.0	-14.2	2.34 V	220	43.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	43.6 PK	88.2	-44.6	2.25 H	168	31.3	12.3
2	#12930.00	32.9 AV	68.2	-35.3	2.25 H	168	20.6	12.3
3	19395.00	47.2 PK	74.0	-26.8	2.02 H	138	50.9	-3.7
4	19395.00	36.4 AV	54.0	-17.6	2.02 H	138	40.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	46.1 PK	88.2	-42.1	1.13 V	199	33.8	12.3
2	#12930.00	36.1 AV	68.2	-32.1	1.13 V	199	23.8	12.3
3	19395.00	50.9 PK	74.0	-23.1	2.33 V	219	54.6	-3.7
4	19395.00	40.4 AV	54.0	-13.6	2.33 V	219	44.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	44.1 PK	88.2	-44.1	2.19 H	146	31.7	12.4
2	#13090.00	33.7 AV	68.2	-34.5	2.19 H	146	21.3	12.4
3	19635.00	47.4 PK	74.0	-26.6	2.10 H	119	51.4	-4.0
4	19635.00	36.6 AV	54.0	-17.4	2.10 H	119	40.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	45.6 PK	88.2	-42.6	1.08 V	197	33.2	12.4
2	#13090.00	35.5 AV	68.2	-32.7	1.08 V	197	23.1	12.4
3	19635.00	50.6 PK	74.0	-23.4	2.31 V	240	54.6	-4.0
4	19635.00	40.1 AV	54.0	-13.9	2.31 V	240	44.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	44.4 PK	88.2	-43.8	2.17 H	161	30.4	14.0
2	#13730.00	33.6 AV	68.2	-34.6	2.17 H	161	19.6	14.0
3	20595.00	47.8 PK	74.0	-26.2	2.09 H	138	51.1	-3.3
4	20595.00	36.6 AV	54.0	-17.4	2.09 H	138	39.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	46.2 PK	88.2	-42.0	1.10 V	190	32.2	14.0
2	#13730.00	36.2 AV	68.2	-32.0	1.10 V	190	22.2	14.0
3	20595.00	51.1 PK	74.0	-22.9	2.36 V	244	54.4	-3.3
4	20595.00	40.2 AV	54.0	-13.8	2.36 V	244	43.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	43.7 PK	88.2	-44.5	2.19 H	160	29.5	14.2
2	#13890.00	33.0 AV	68.2	-35.2	2.19 H	160	18.8	14.2
3	20835.00	47.5 PK	74.0	-26.5	2.02 H	141	50.4	-2.9
4	20835.00	36.4 AV	54.0	-17.6	2.02 H	141	39.3	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	45.6 PK	88.2	-42.6	1.17 V	180	31.4	14.2
2	#13890.00	35.8 AV	68.2	-32.4	1.17 V	180	21.6	14.2
3	20835.00	51.1 PK	74.0	-22.9	2.33 V	242	54.0	-2.9
4	20835.00	40.3 AV	54.0	-13.7	2.33 V	242	43.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	43.9 PK	88.2	-44.3	2.16 H	151	29.2	14.7
2	#14050.00	33.1 AV	68.2	-35.1	2.16 H	151	18.4	14.7
3	21075.00	47.8 PK	74.0	-26.2	2.07 H	120	50.0	-2.2
4	21075.00	36.9 AV	54.0	-17.1	2.07 H	120	39.1	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	47.0 PK	88.2	-41.2	1.13 V	199	32.3	14.7
2	#14050.00	36.8 AV	68.2	-31.4	1.13 V	199	22.1	14.7
3	21075.00	50.8 PK	74.0	-23.2	2.38 V	242	53.0	-2.2
4	21075.00	39.9 AV	54.0	-14.1	2.38 V	242	42.1	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.0 PK	74.0	-30.0	2.28 H	164	32.1	11.9
2	12050.00	33.2 AV	54.0	-20.8	2.28 H	164	21.3	11.9
3	18075.00	47.5 PK	74.0	-26.5	2.12 H	127	52.2	-4.7
4	18075.00	36.5 AV	54.0	-17.5	2.12 H	127	41.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	45.8 PK	74.0	-28.2	1.19 V	189	33.9	11.9
2	12050.00	36.1 AV	54.0	-17.9	1.19 V	189	24.2	11.9
3	18075.00	50.3 PK	74.0	-23.7	2.32 V	238	55.0	-4.7
4	18075.00	39.8 AV	54.0	-14.2	2.32 V	238	44.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.2 PK	74.0	-29.8	2.17 H	159	32.7	11.5
2	12690.00	33.5 AV	54.0	-20.5	2.17 H	159	22.0	11.5
3	19035.00	47.6 PK	74.0	-26.4	2.10 H	125	51.5	-3.9
4	19035.00	36.6 AV	54.0	-17.4	2.10 H	125	40.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	46.3 PK	74.0	-27.7	1.10 V	180	34.8	11.5
2	12690.00	36.4 AV	54.0	-17.6	1.10 V	180	24.9	11.5
3	19035.00	50.7 PK	74.0	-23.3	2.27 V	224	54.6	-3.9
4	19035.00	39.8 AV	54.0	-14.2	2.27 V	224	43.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	43.6 PK	88.2	-44.6	2.22 H	147	31.6	12.0
2	#13010.00	33.1 AV	68.2	-35.1	2.22 H	147	21.1	12.0
3	19515.00	47.9 PK	74.0	-26.1	2.03 H	137	52.0	-4.1
4	19515.00	37.2 AV	54.0	-16.8	2.03 H	137	41.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	45.3 PK	88.2	-42.9	1.13 V	196	33.3	12.0
2	#13010.00	35.6 AV	68.2	-32.6	1.13 V	196	23.6	12.0
3	19515.00	50.2 PK	74.0	-23.8	2.34 V	245	54.3	-4.1
4	19515.00	39.7 AV	54.0	-14.3	2.34 V	245	43.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.1 PK	74.0	-29.9	2.18 H	172	31.0	13.1
2	13330.00	33.8 AV	54.0	-20.2	2.18 H	172	20.7	13.1
3	19995.00	47.2 PK	74.0	-26.8	2.05 H	128	50.8	-3.6
4	19995.00	36.4 AV	54.0	-17.6	2.05 H	128	40.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.0 PK	74.0	-28.0	1.16 V	187	32.9	13.1
2	13330.00	35.9 AV	54.0	-18.1	1.16 V	187	22.8	13.1
3	19995.00	50.1 PK	74.0	-23.9	2.28 V	222	53.7	-3.6
4	19995.00	39.8 AV	54.0	-14.2	2.28 V	222	43.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	43.8 PK	88.2	-44.4	2.21 H	177	29.8	14.0
2	#13650.00	33.0 AV	68.2	-35.2	2.21 H	177	19.0	14.0
3	20475.00	47.7 PK	74.0	-26.3	2.02 H	133	50.9	-3.2
4	20475.00	36.7 AV	54.0	-17.3	2.02 H	133	39.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	45.9 PK	88.2	-42.3	1.10 V	198	31.9	14.0
2	#13650.00	36.2 AV	68.2	-32.0	1.10 V	198	22.2	14.0
3	20475.00	50.7 PK	74.0	-23.3	2.30 V	241	53.9	-3.2
4	20475.00	40.3 AV	54.0	-13.7	2.30 V	241	43.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	43.8 PK	88.2	-44.4	2.21 H	178	29.4	14.4
2	#13970.00	33.2 AV	68.2	-35.0	2.21 H	178	18.8	14.4
3	20955.00	47.5 PK	74.0	-26.5	2.05 H	131	50.2	-2.7
4	20955.00	36.4 AV	54.0	-17.6	2.05 H	131	39.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.1 PK	88.2	-42.1	1.13 V	188	31.7	14.4
2	#13970.00	36.1 AV	68.2	-32.1	1.13 V	188	21.7	14.4
3	20955.00	50.4 PK	74.0	-23.6	2.36 V	232	53.1	-2.7
4	20955.00	40.0 AV	54.0	-14.0	2.36 V	232	42.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.8 PK	74.0	-30.2	2.26 H	153	31.9	11.9
2	12050.00	33.1 AV	54.0	-20.9	2.26 H	153	21.2	11.9
3	18075.00	47.7 PK	74.0	-26.3	2.08 H	142	52.4	-4.7
4	18075.00	36.6 AV	54.0	-17.4	2.08 H	142	41.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.1 PK	74.0	-27.9	1.09 V	183	34.2	11.9
2	12050.00	36.4 AV	54.0	-17.6	1.09 V	183	24.5	11.9
3	18075.00	50.5 PK	74.0	-23.5	2.37 V	236	55.2	-4.7
4	18075.00	40.2 AV	54.0	-13.8	2.37 V	236	44.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.5 PK	74.0	-29.5	2.20 H	165	33.0	11.5
2	12690.00	33.8 AV	54.0	-20.2	2.20 H	165	22.3	11.5
3	19035.00	47.3 PK	74.0	-26.7	2.01 H	132	51.2	-3.9
4	19035.00	36.4 AV	54.0	-17.6	2.01 H	132	40.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.7 PK	74.0	-28.3	1.13 V	194	34.2	11.5
2	12690.00	35.6 AV	54.0	-18.4	1.13 V	194	24.1	11.5
3	19035.00	51.0 PK	74.0	-23.0	2.30 V	238	54.9	-3.9
4	19035.00	40.2 AV	54.0	-13.8	2.30 V	238	44.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	44.3 PK	88.2	-43.9	2.22 H	167	32.3	12.0
2	#13010.00	33.5 AV	68.2	-34.7	2.22 H	167	21.5	12.0
3	19515.00	48.1 PK	74.0	-25.9	2.02 H	136	52.2	-4.1
4	19515.00	36.9 AV	54.0	-17.1	2.02 H	136	41.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	45.6 PK	88.2	-42.6	1.19 V	187	33.6	12.0
2	#13010.00	36.0 AV	68.2	-32.2	1.19 V	187	24.0	12.0
3	19515.00	51.3 PK	74.0	-22.7	2.37 V	238	55.4	-4.1
4	19515.00	40.4 AV	54.0	-13.6	2.37 V	238	44.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	43.3 PK	74.0	-30.7	2.21 H	165	30.2	13.1
2	13330.00	32.9 AV	54.0	-21.1	2.21 H	165	19.8	13.1
3	19995.00	47.7 PK	74.0	-26.3	2.08 H	127	51.3	-3.6
4	19995.00	36.4 AV	54.0	-17.6	2.08 H	127	40.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.2 PK	74.0	-28.8	1.15 V	171	32.1	13.1
2	13330.00	35.5 AV	54.0	-18.5	1.15 V	171	22.4	13.1
3	19995.00	50.8 PK	74.0	-23.2	2.37 V	217	54.4	-3.6
4	19995.00	40.1 AV	54.0	-13.9	2.37 V	217	43.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	43.7 PK	88.2	-44.5	2.17 H	175	29.7	14.0
2	#13650.00	32.9 AV	68.2	-35.3	2.17 H	175	18.9	14.0
3	20475.00	48.2 PK	74.0	-25.8	2.06 H	141	51.4	-3.2
4	20475.00	37.0 AV	54.0	-17.0	2.06 H	141	40.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.3 PK	88.2	-41.9	1.10 V	182	32.3	14.0
2	#13650.00	36.2 AV	68.2	-32.0	1.10 V	182	22.2	14.0
3	20475.00	50.9 PK	74.0	-23.1	2.30 V	243	54.1	-3.2
4	20475.00	40.2 AV	54.0	-13.8	2.30 V	243	43.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.0 PK	88.2	-44.2	2.17 H	146	29.6	14.4
2	#13970.00	33.4 AV	68.2	-34.8	2.17 H	146	19.0	14.4
3	20955.00	47.7 PK	74.0	-26.3	2.06 H	125	50.4	-2.7
4	20955.00	37.0 AV	54.0	-17.0	2.06 H	125	39.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.5 PK	88.2	-41.7	1.16 V	201	32.1	14.4
2	#13970.00	36.4 AV	68.2	-31.8	1.16 V	201	22.0	14.4
3	20955.00	50.7 PK	74.0	-23.3	2.33 V	227	53.4	-2.7
4	20955.00	40.1 AV	54.0	-13.9	2.33 V	227	42.8	-2.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Plot of Other Emission

Mode B


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

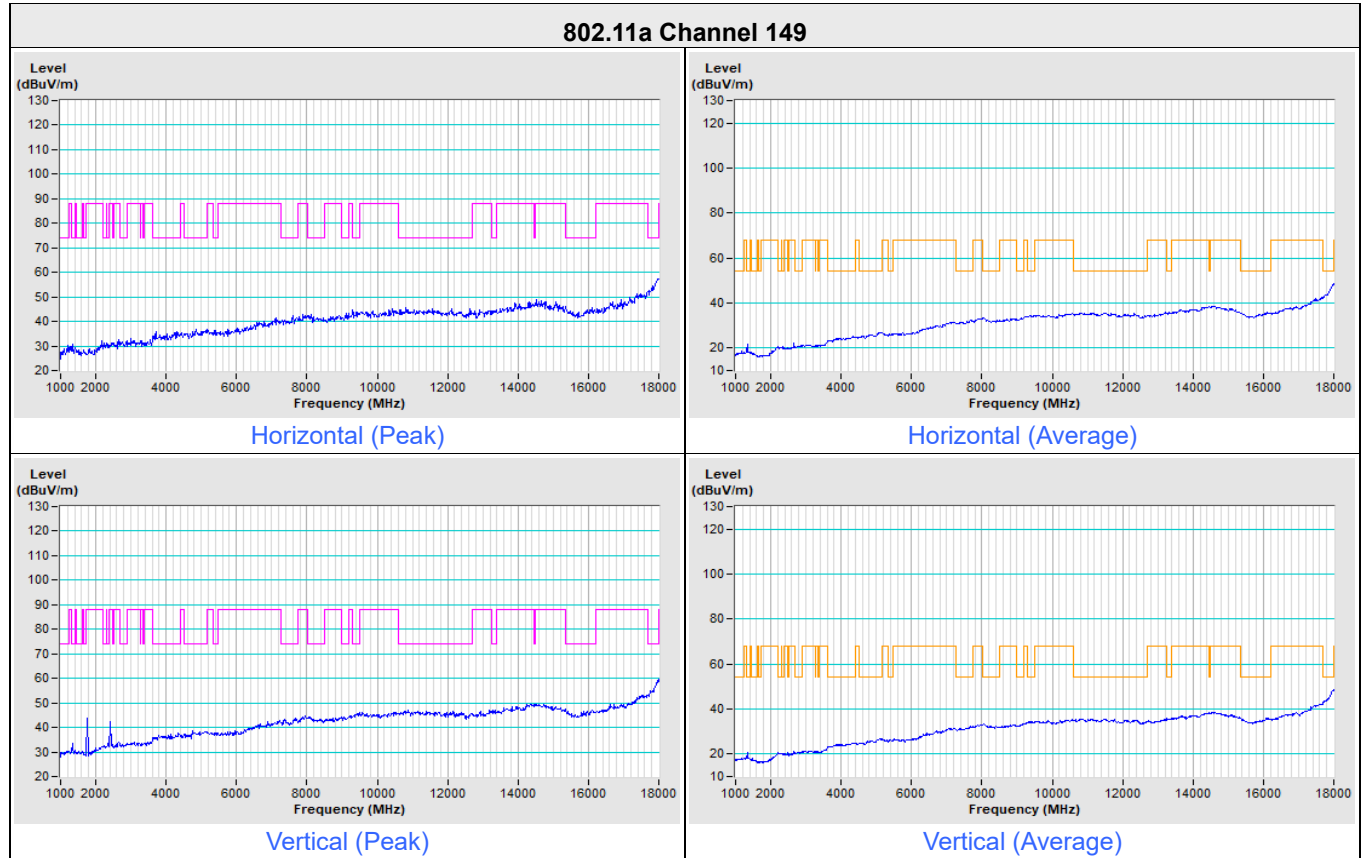

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

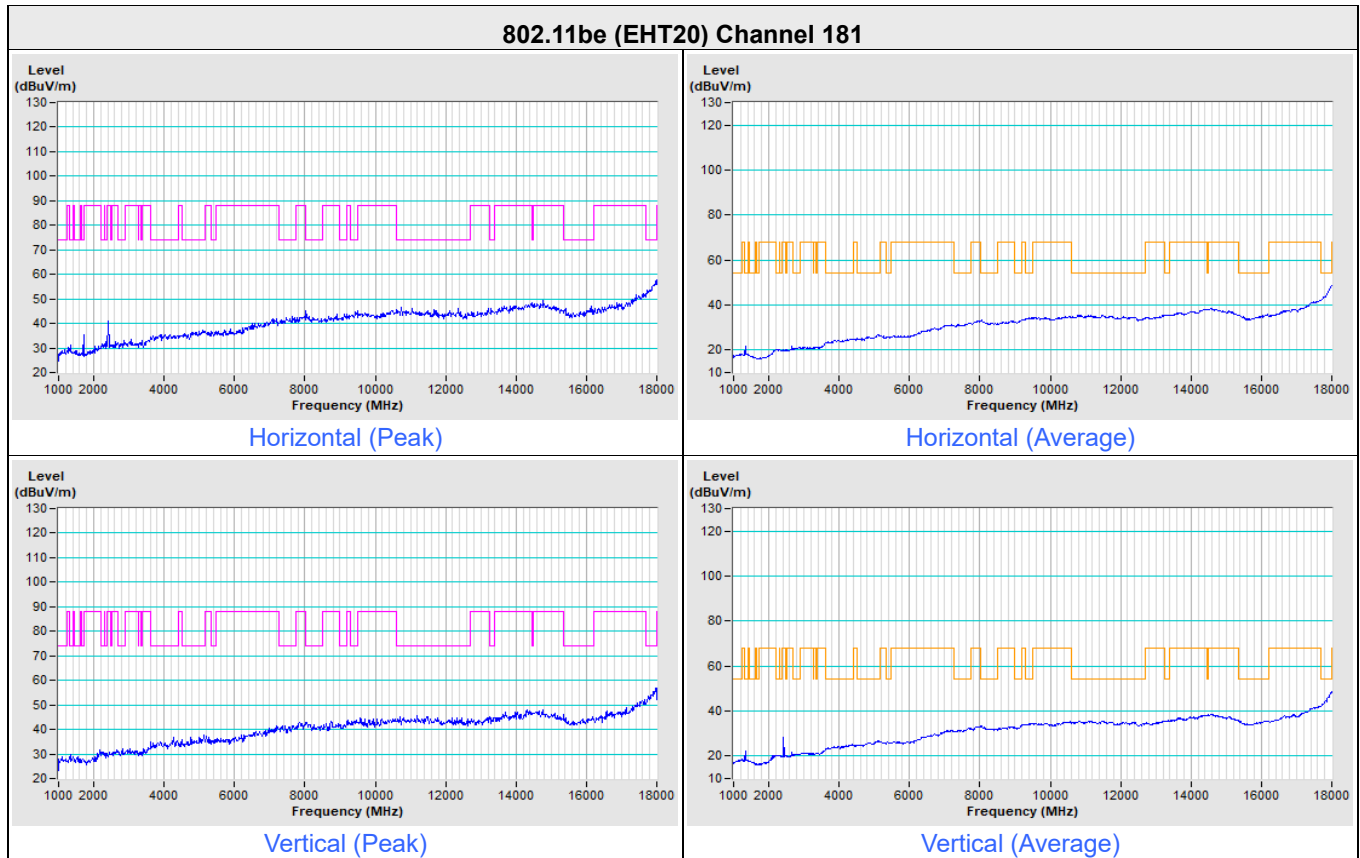

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

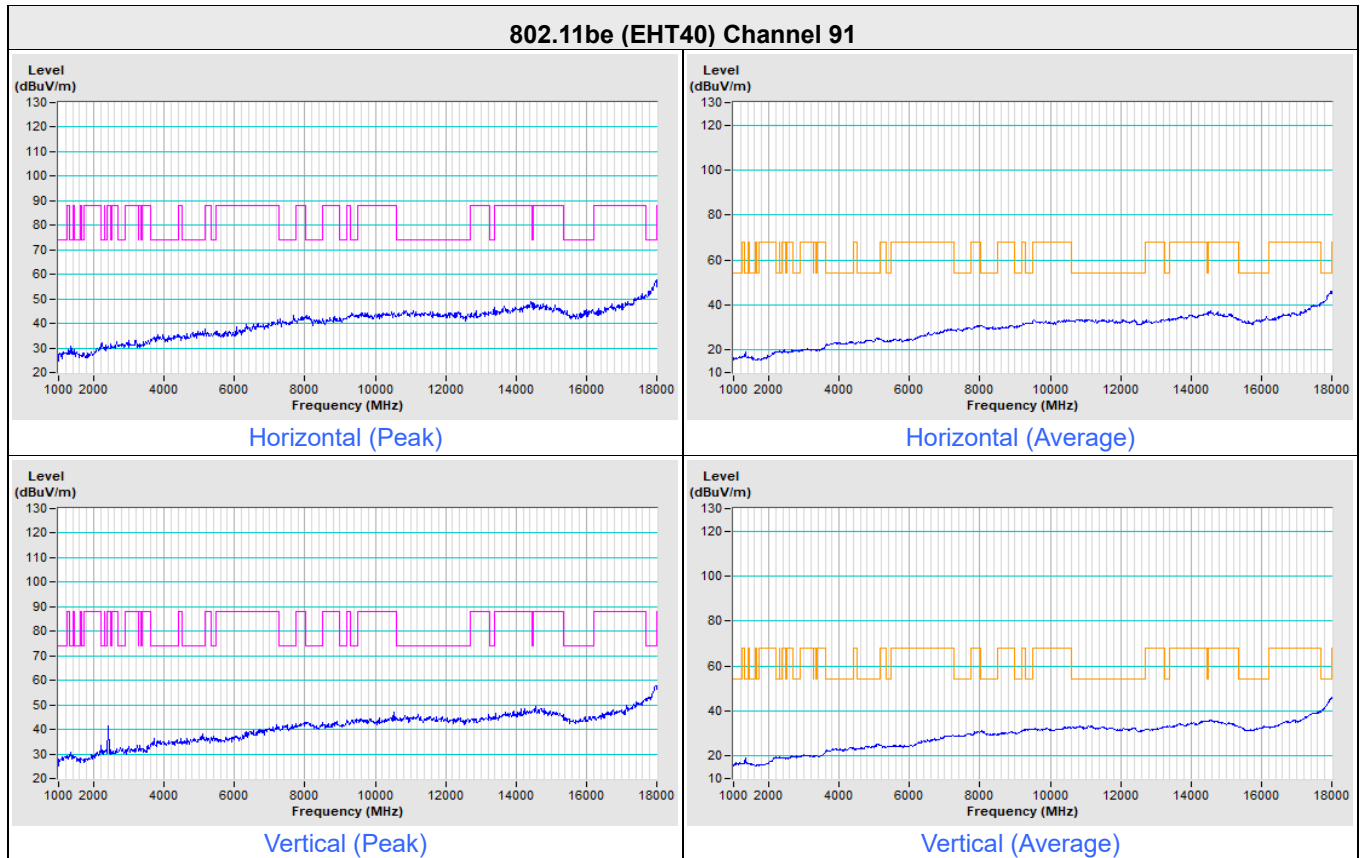

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

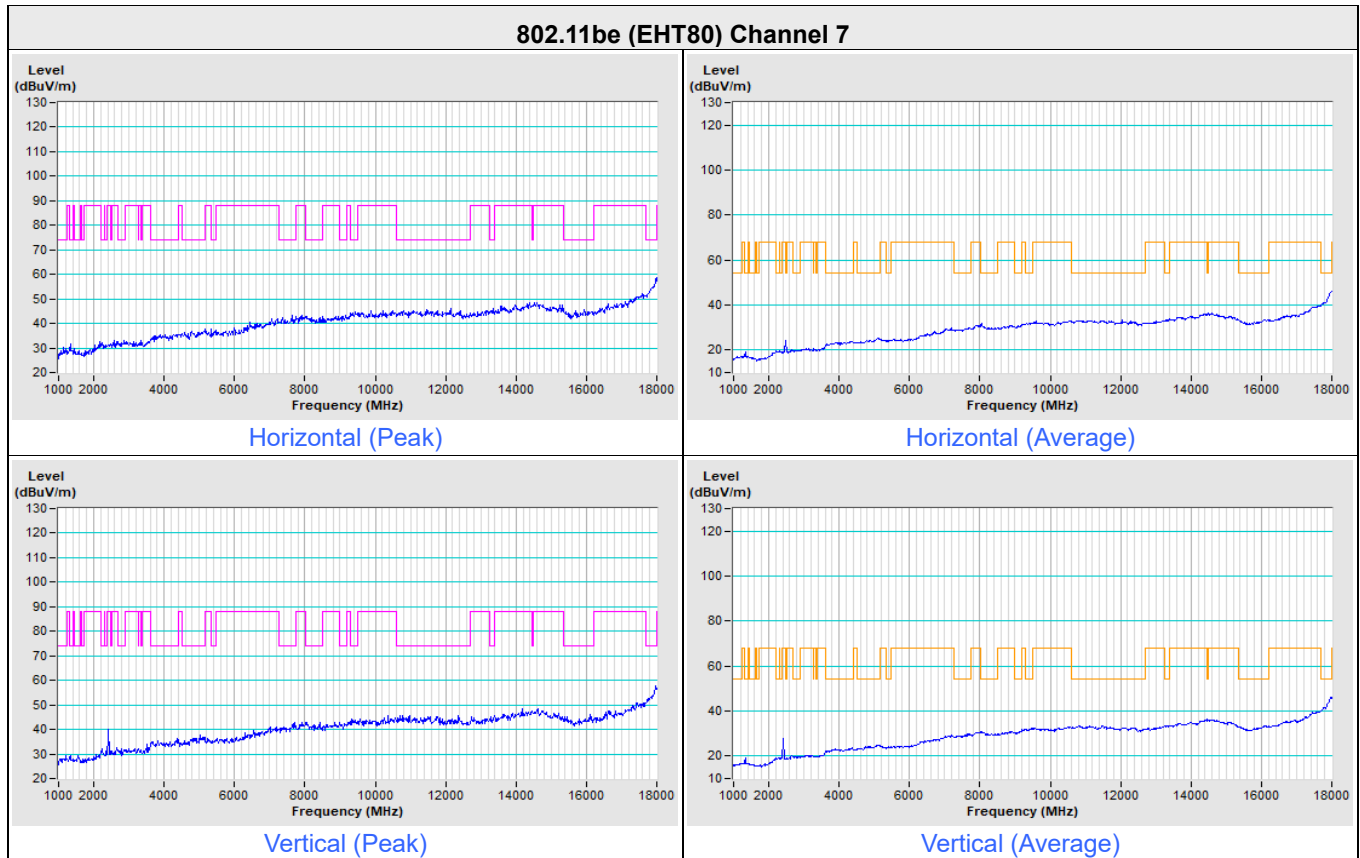

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

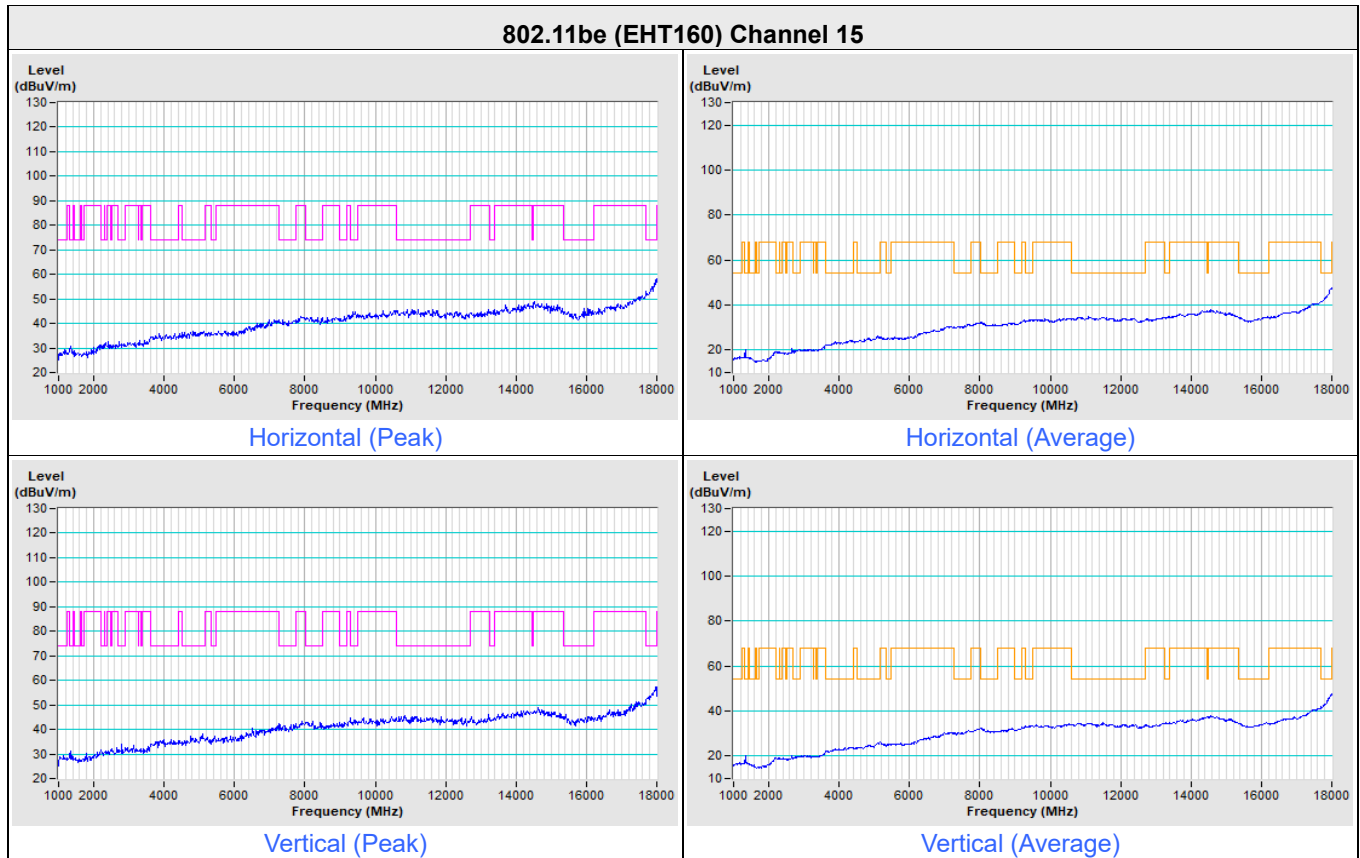

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

under control of a Standard Power AP

Mode A


1Tx

Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.92	46.31 PK	74	-27.69	-53.87	4.92	-48.95
2	5458.92	35.84 AV	54	-18.16	-64.34	4.92	-59.42
3	14482.58	43.72 PK	74	-30.28	-56.46	4.92	-51.54
4	14482.58	35 AV	54	-19	-65.18	4.92	-60.26
5	20075.9	43.33 PK	74	-30.67	-56.85	4.92	-51.93
6	20075.9	35.59 AV	54	-18.41	-64.59	4.92	-59.67
7	23715.3	44.66 PK	74	-29.34	-55.52	4.92	-50.6
8	23715.3	36.27 AV	54	-17.73	-63.91	4.92	-58.99
9	38642.31	37.58 PK	74	-36.42	-62.6	4.92	-57.68
10	38642.31	31.18 AV	54	-22.82	-69	4.92	-64.08


Note: Margin value = Emission Level - Limit value

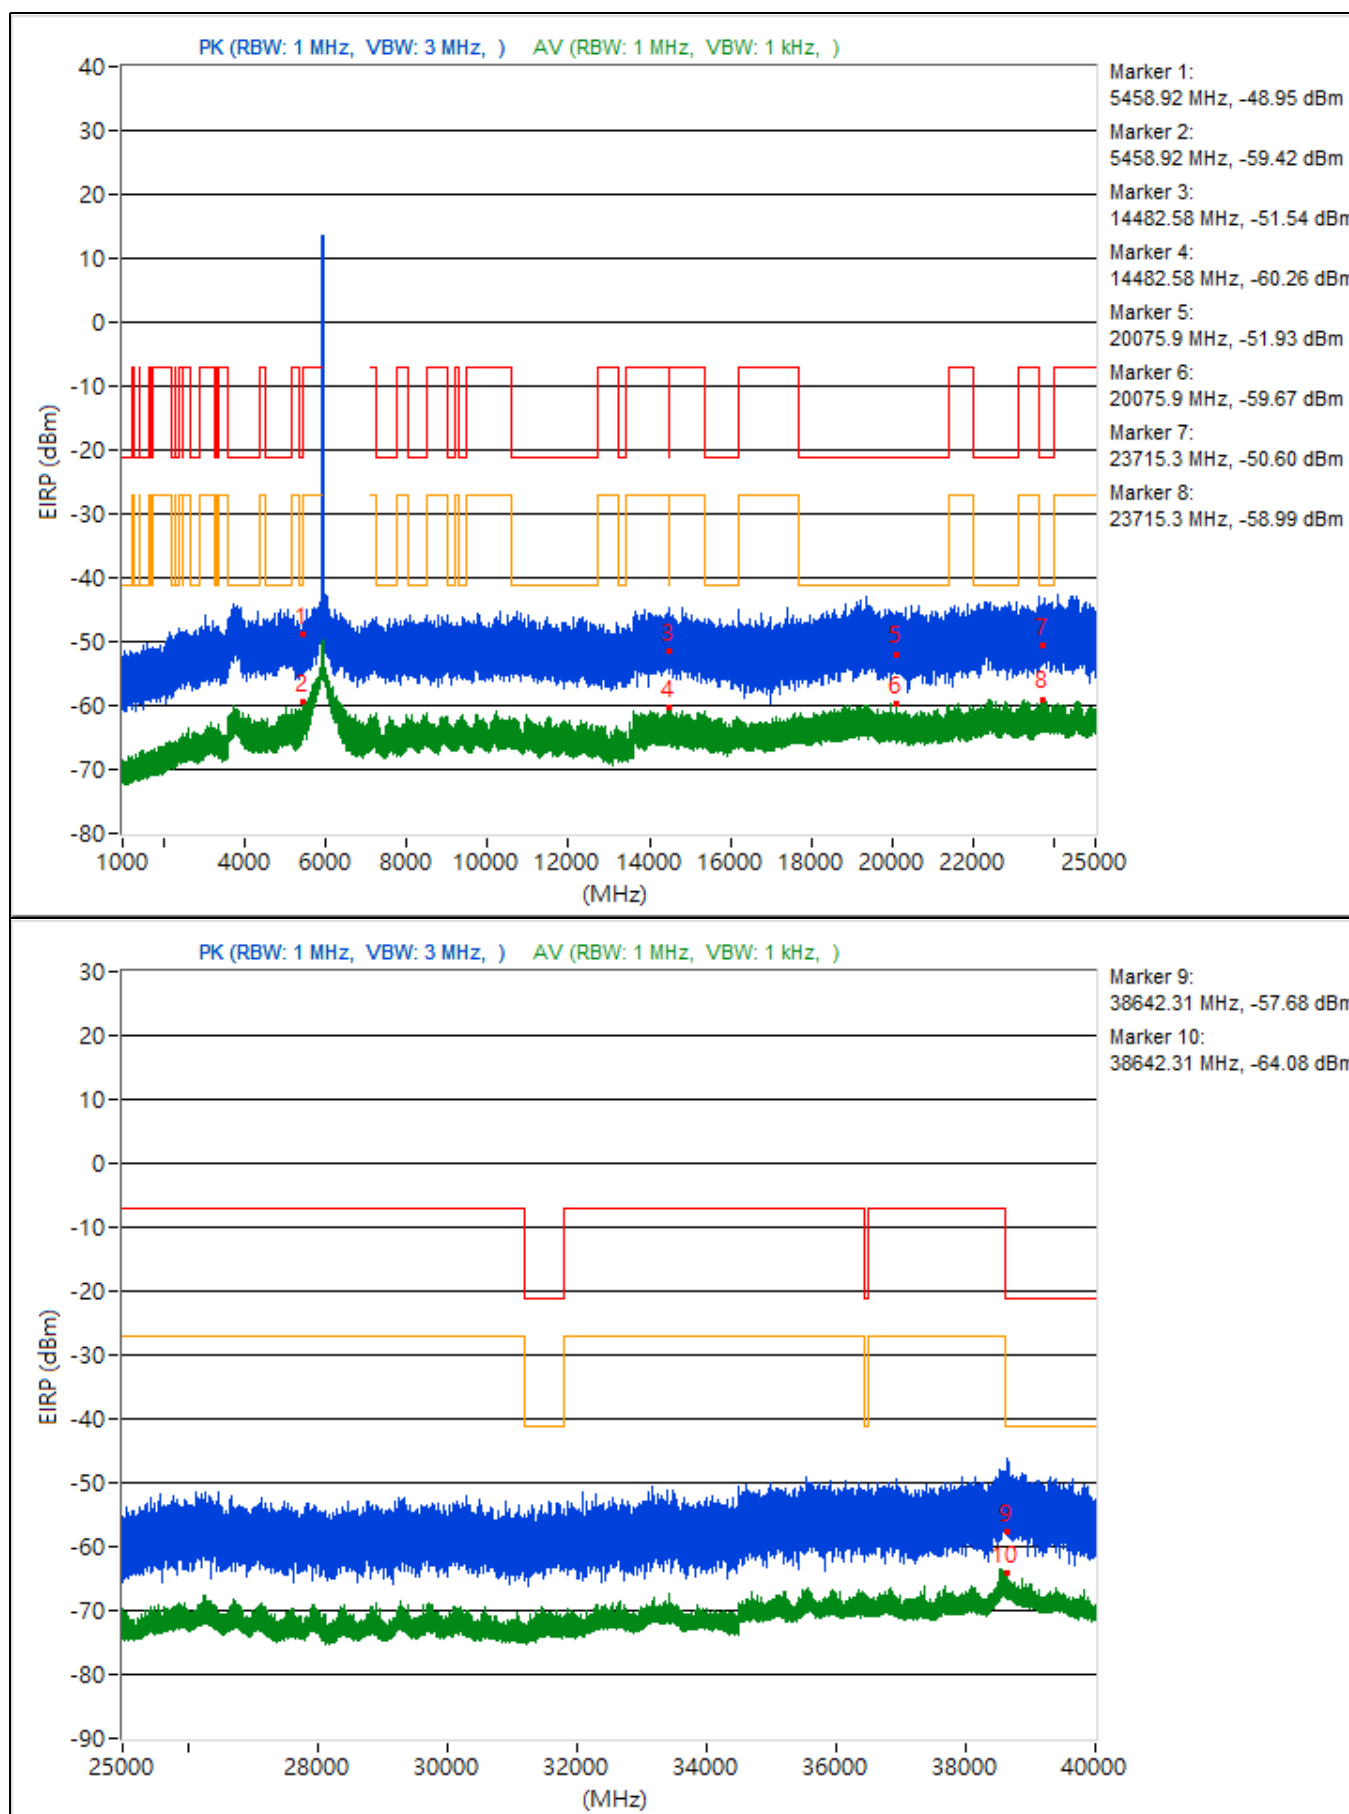


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.43	47.94 PK	74	-26.06	-52.24	4.92	-47.32
2	5449.43	35.3 AV	54	-18.7	-64.88	4.92	-59.96
3	9001.6	46.1 PK	74	-27.9	-54.08	4.92	-49.16
4	9001.6	34.31 AV	54	-19.69	-65.87	4.92	-60.95
5	18915.7	44.31 PK	74	-29.69	-55.87	4.92	-50.95
6	18915.7	35.86 AV	54	-18.14	-64.32	4.92	-59.4
7	23978.2	44.74 PK	74	-29.26	-55.44	4.92	-50.52
8	23978.2	37.35 AV	54	-16.65	-62.83	4.92	-57.91
9	38603.47	46.22 PK	74	-27.78	-53.96	4.92	-49.04
10	38603.47	32.05 AV	54	-21.95	-68.13	4.92	-63.21

Note: Margin value = Emission Level - Limit value

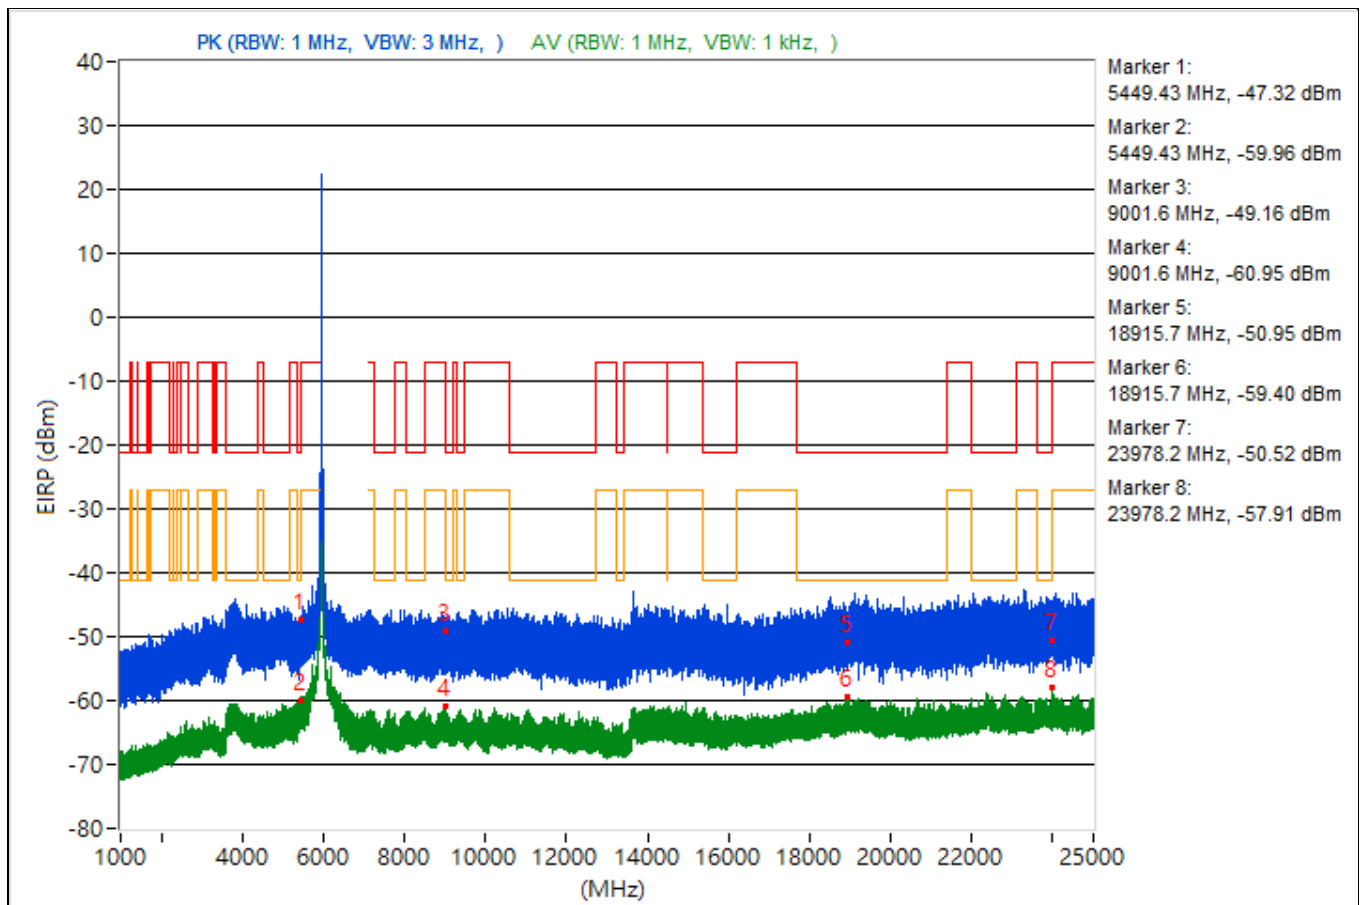


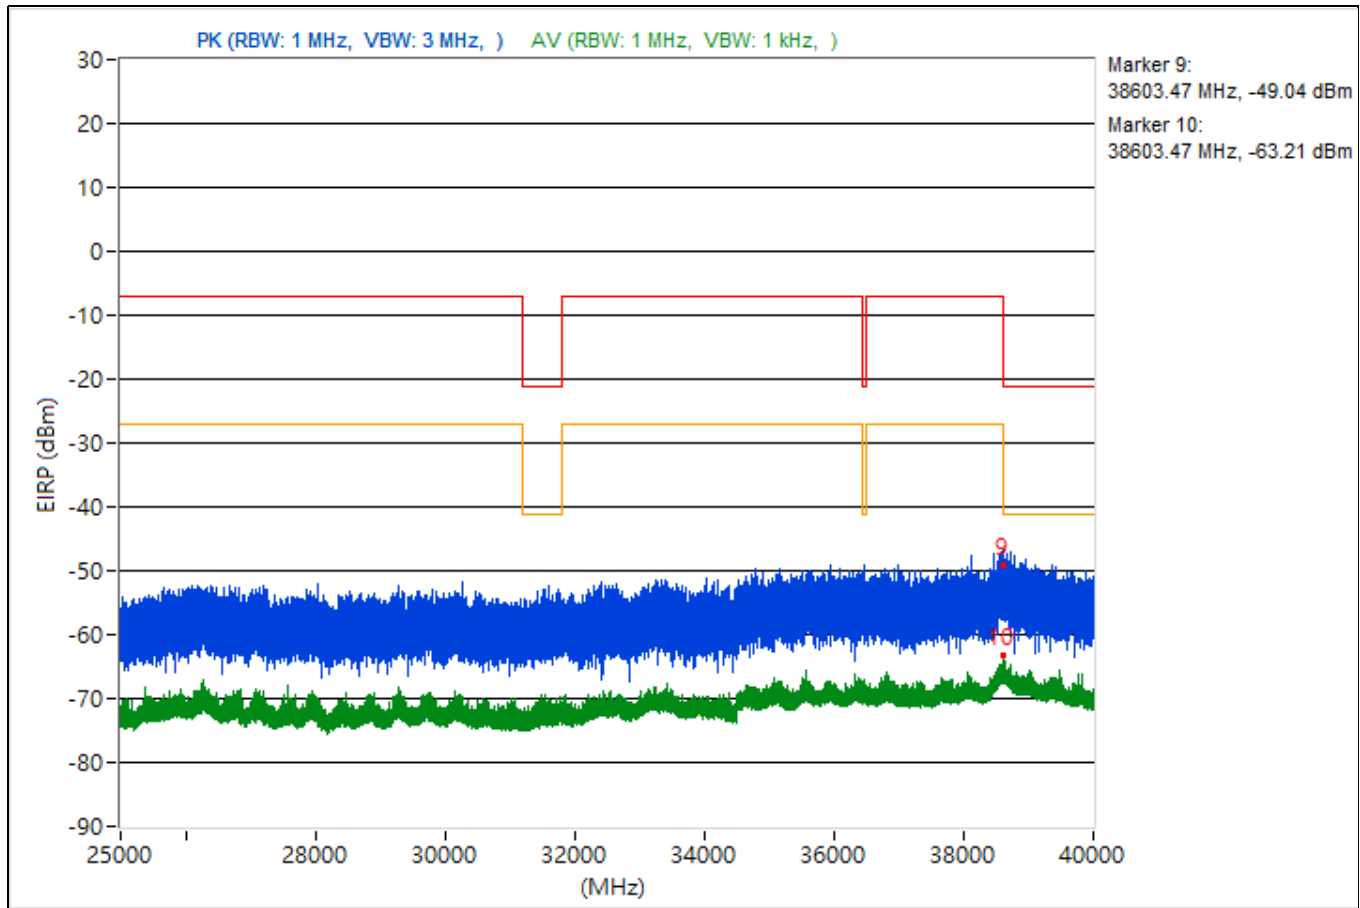


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.46	44 PK	74	-30	-56.18	4.92	-51.26
2	3757.46	35.19 AV	54	-18.81	-64.99	4.92	-60.07
3	12350.04	46.21 PK	74	-27.79	-53.97	4.92	-49.05
4	12350.04	36.56 AV	54	-17.44	-63.62	4.92	-58.7
5	18356	43.32 PK	74	-30.68	-56.86	4.92	-51.94
6	18356	35.98 AV	54	-18.02	-64.2	4.92	-59.28
7	22473.7	44.98 PK	74	-29.02	-55.2	4.92	-50.28
8	22473.7	36.28 AV	54	-17.72	-63.9	4.92	-58.98
9	38633.78	45.57 PK	74	-28.43	-54.61	4.92	-49.69
10	38633.78	31.28 AV	54	-22.72	-68.9	4.92	-63.98

Note: Margin value = Emission Level - Limit value

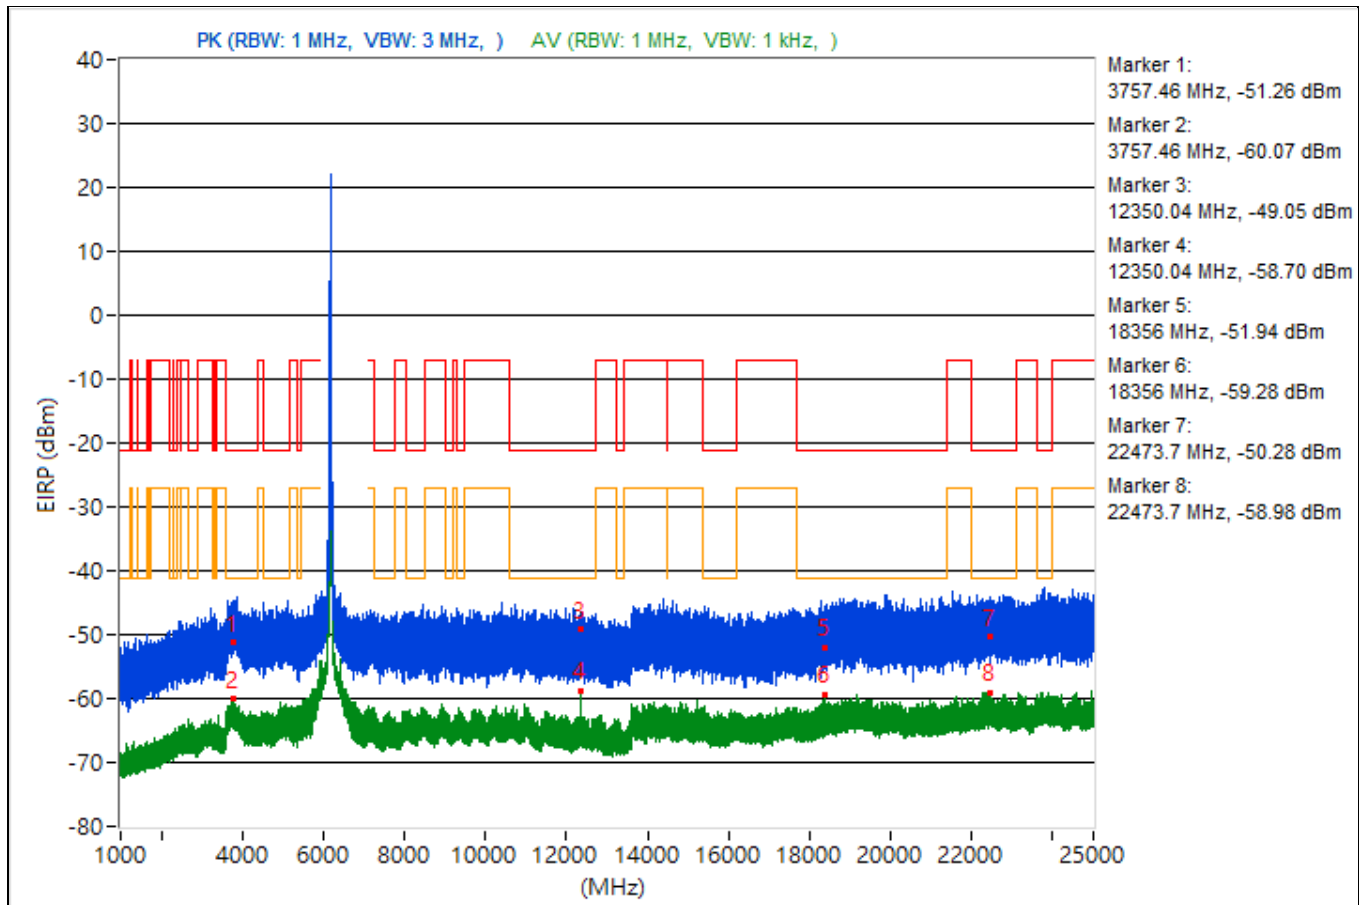


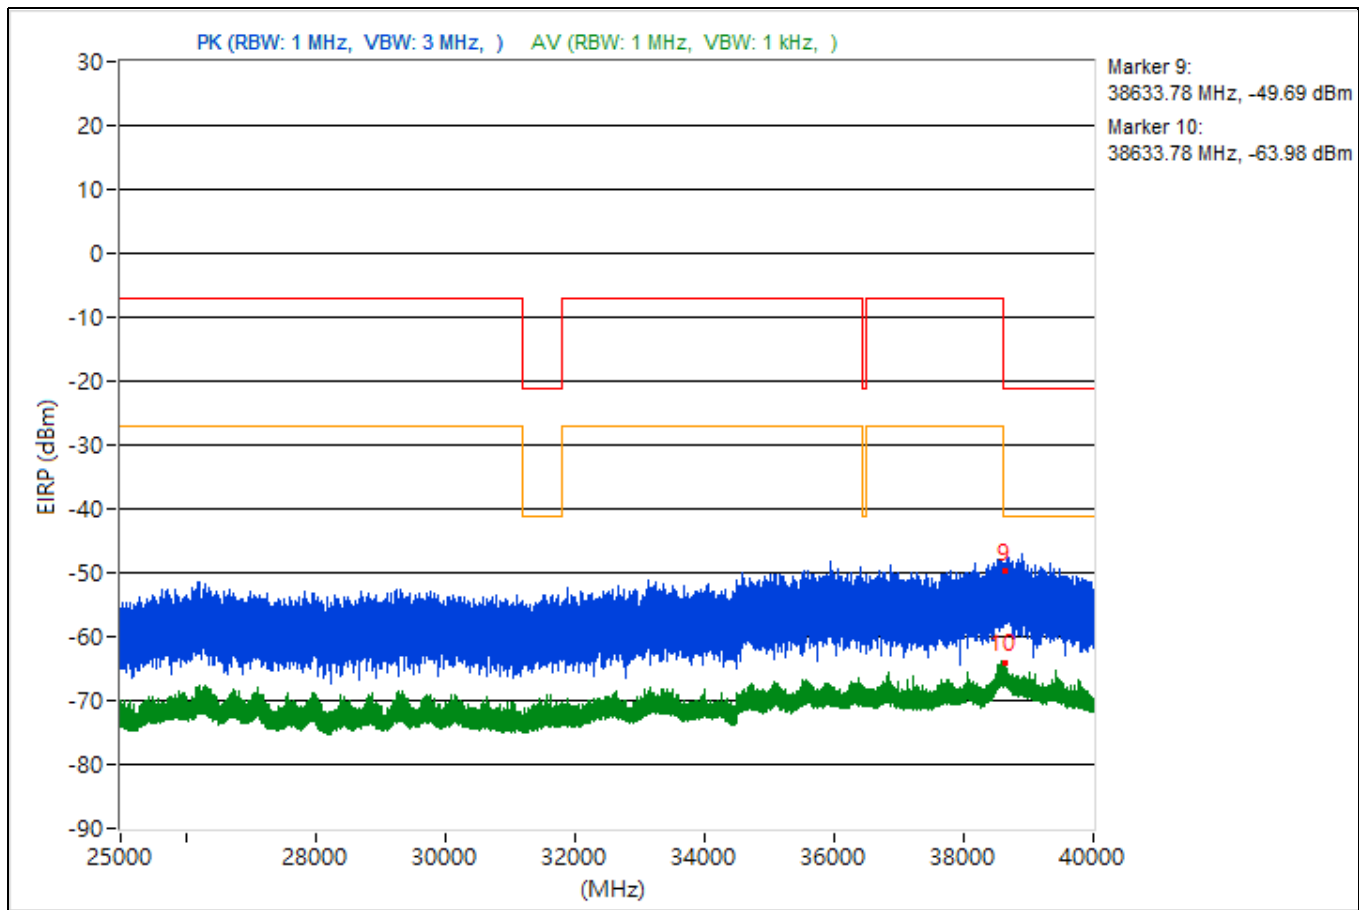


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3729.84	47.97 PK	74	-26.03	-52.21	4.92	-47.29
2	3729.84	35.25 AV	54	-18.75	-64.93	4.92	-60.01
3	9356.09	38.81 PK	74	-35.19	-61.37	4.92	-56.45
4	9356.09	34.33 AV	54	-19.67	-65.85	4.92	-60.93
5	20262.9	46.88 PK	74	-27.12	-53.3	4.92	-48.38
6	20262.9	35.66 AV	54	-18.34	-64.52	4.92	-59.6
7	22329.8	45.5 PK	74	-28.5	-54.68	4.92	-49.76
8	22329.8	36.47 AV	54	-17.53	-63.71	4.92	-58.79
9	38643.64	41.8 PK	74	-32.2	-58.38	4.92	-53.46
10	38643.64	31.65 AV	54	-22.35	-68.53	4.92	-63.61

Note: Margin value = Emission Level - Limit value

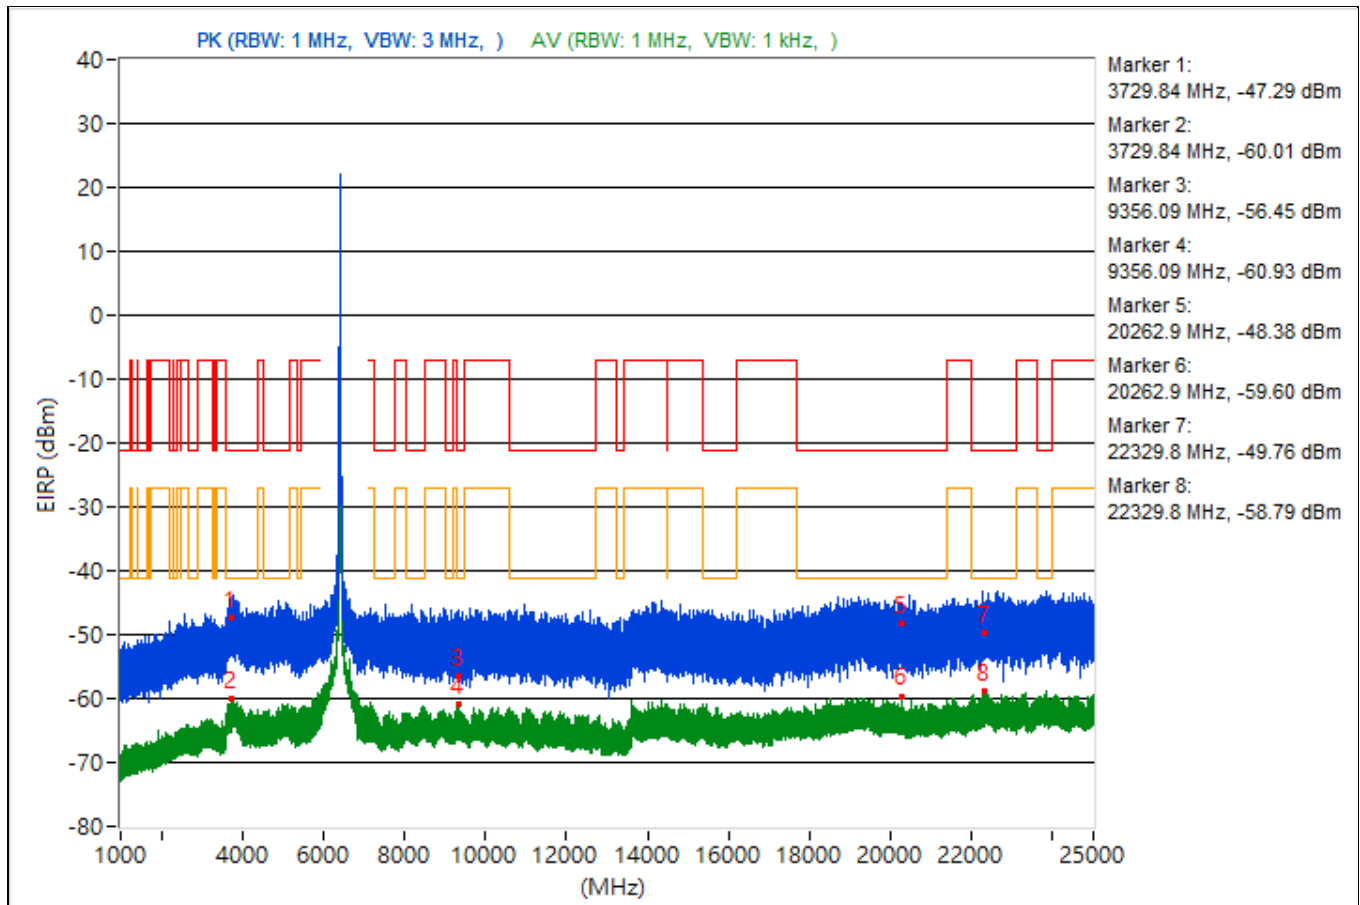


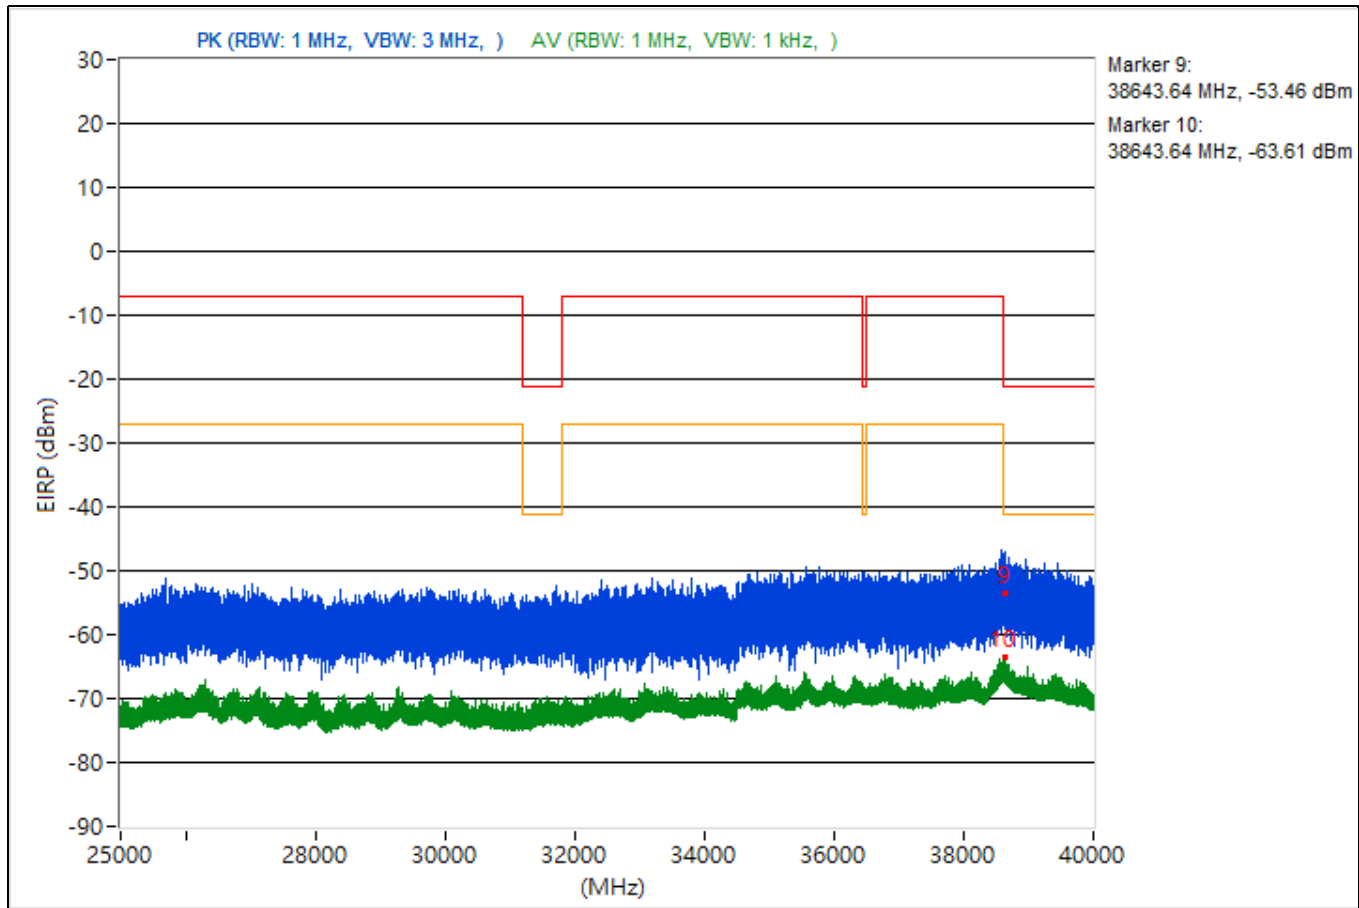


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3774.1	46.53 PK	74	-27.47	-53.65	4.92	-48.73
2	3774.1	35.11 AV	54	-18.89	-65.07	4.92	-60.15
3	8442.76	43.09 PK	74	-30.91	-57.09	4.92	-52.17
4	8442.76	34.07 AV	54	-19.93	-66.11	4.92	-61.19
5	19205.3	48.59 PK	74	-25.41	-51.59	4.92	-46.67
6	19205.3	35.88 AV	54	-18.12	-64.3	4.92	-59.38
7	22385.7	49.62 PK	74	-24.38	-50.56	4.92	-45.64
8	22385.7	36.07 AV	54	-17.93	-64.11	4.92	-59.19
9	38610.22	42.37 PK	74	-31.63	-57.81	4.92	-52.89
10	38610.22	30.86 AV	54	-23.14	-69.32	4.92	-64.4

Note: Margin value = Emission Level - Limit value

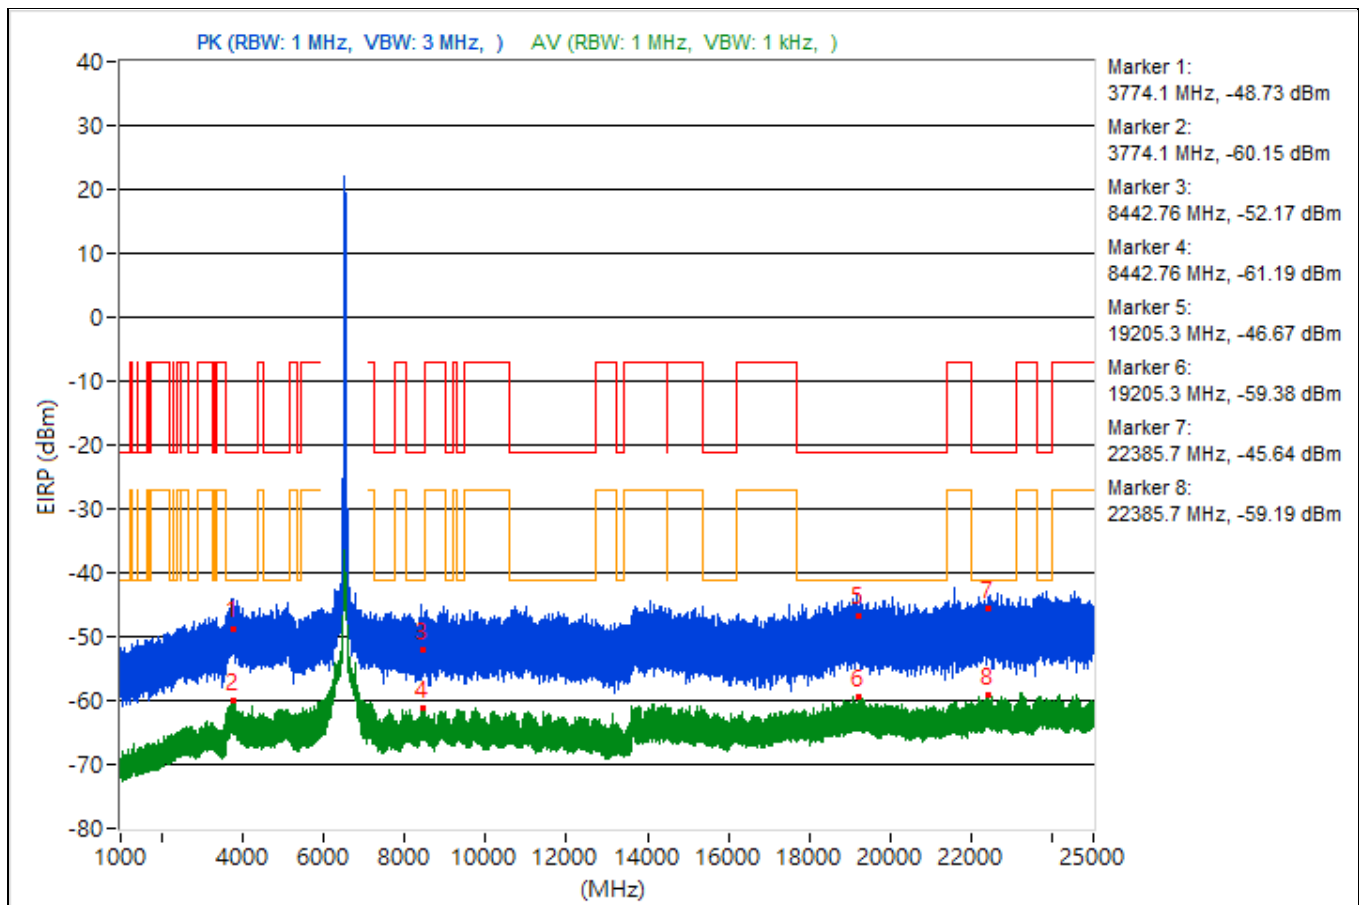


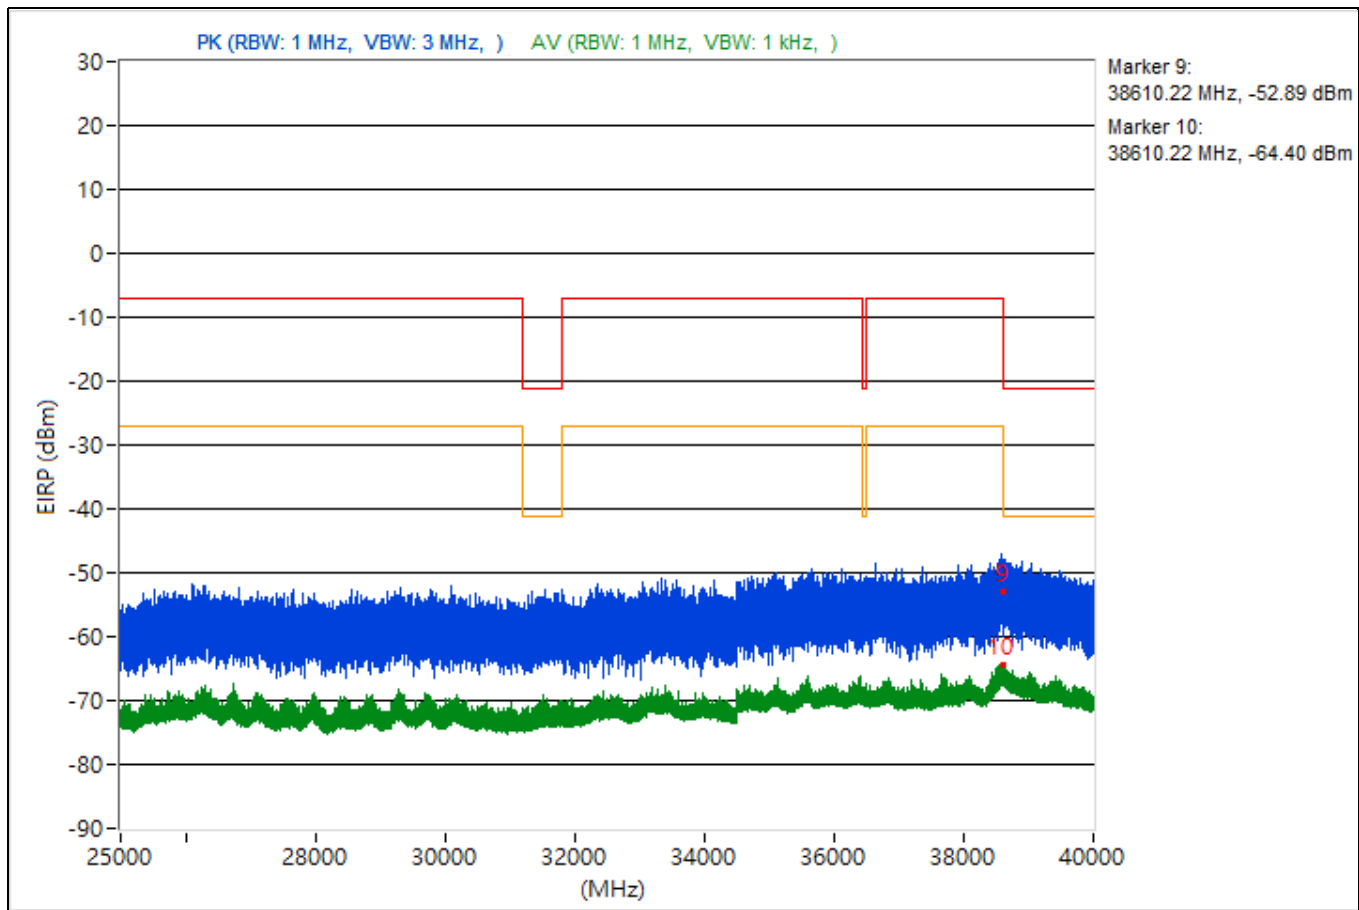


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.47	44.8 PK	74	-29.2	-55.38	4.92	-50.46
2	3772.47	35.59 AV	54	-18.41	-64.59	4.92	-59.67
3	10988.44	43.43 PK	74	-30.57	-56.75	4.92	-51.83
4	10988.44	34.37 AV	54	-19.63	-65.81	4.92	-60.89
5	19334	49.04 PK	74	-24.96	-51.14	4.92	-46.22
6	19334	35.75 AV	54	-18.25	-64.43	4.92	-59.51
7	23666.6	46.94 PK	74	-27.06	-53.24	4.92	-48.32
8	23666.6	36.08 AV	54	-17.92	-64.1	4.92	-59.18
9	38604.18	41.2 PK	74	-32.8	-58.98	4.92	-54.06
10	38604.18	31.79 AV	54	-22.21	-68.39	4.92	-63.47

Note: Margin value = Emission Level - Limit value

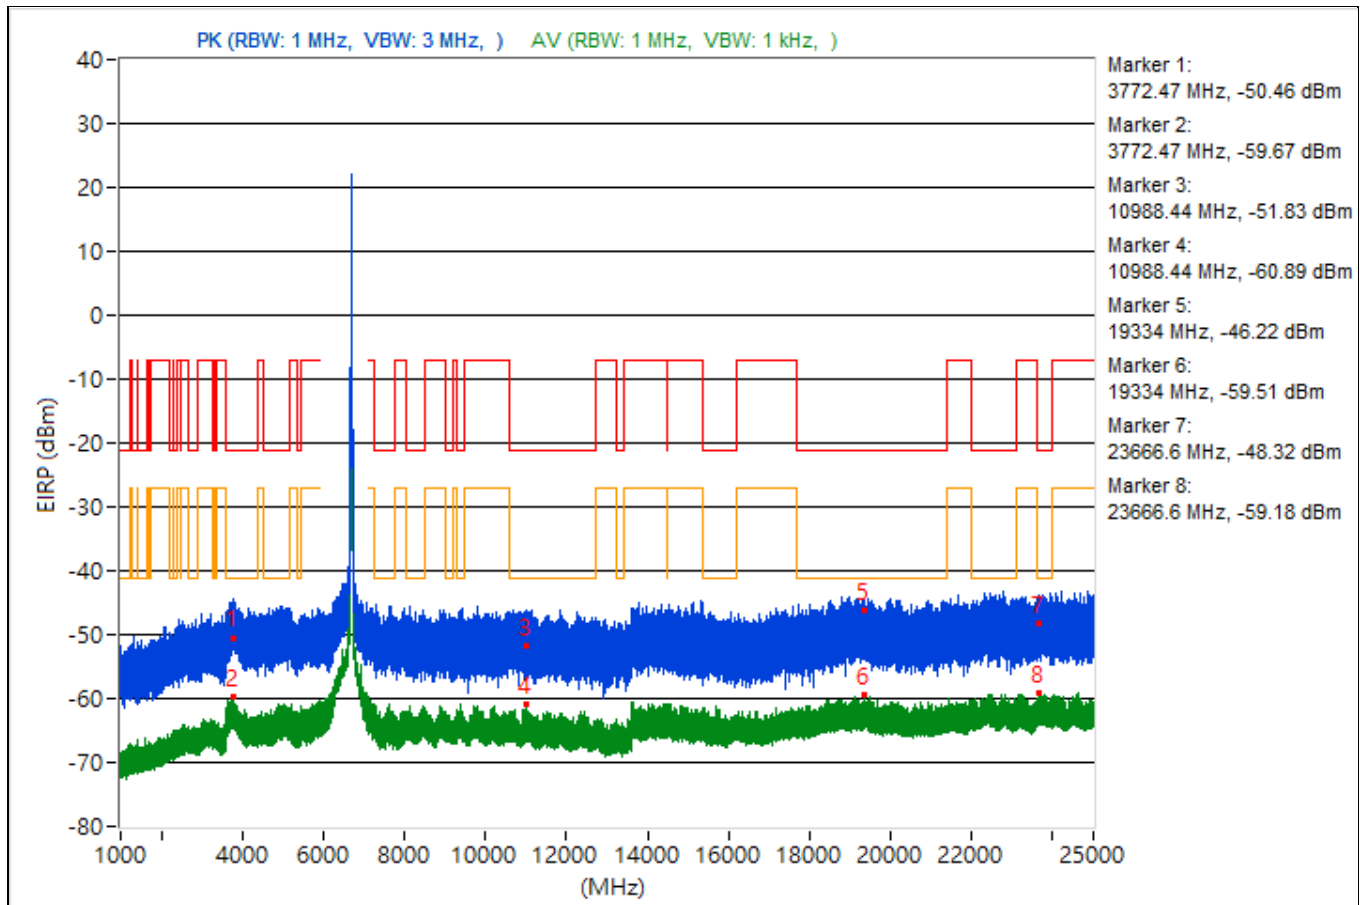


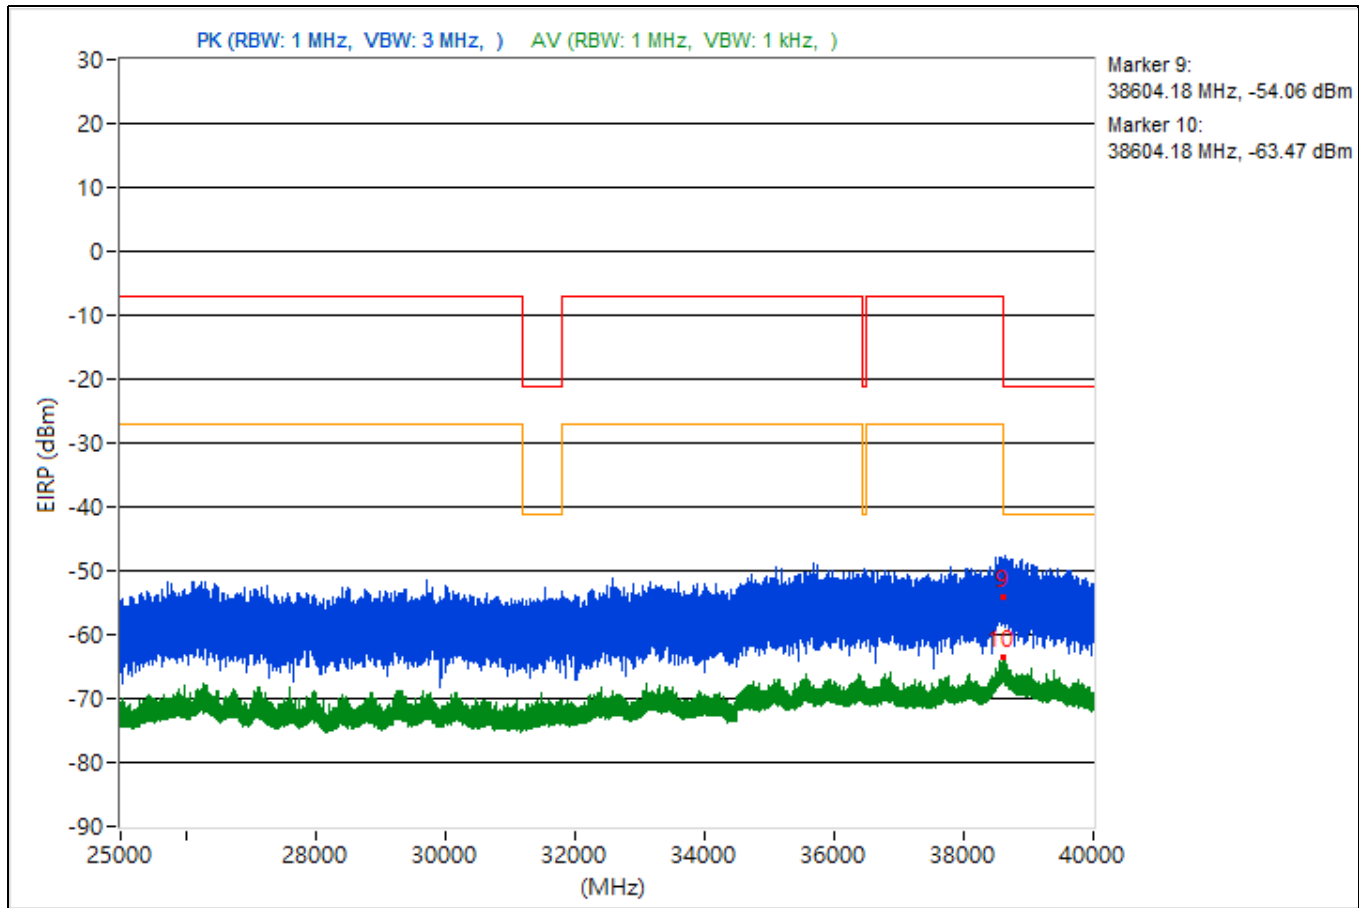


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.29	45.19 PK	74	-28.81	-54.99	4.92	-50.07
2	3791.29	34.8 AV	54	-19.2	-65.38	4.92	-60.46
3	7279.86	42.13 PK	74	-31.87	-58.05	4.92	-53.13
4	7279.86	35.48 AV	54	-18.52	-64.7	4.92	-59.78
5	19328.9	43.14 PK	74	-30.86	-57.04	4.92	-52.12
6	19328.9	35.78 AV	54	-18.22	-64.4	4.92	-59.48
7	23717	45.43 PK	74	-28.57	-54.75	4.92	-49.83
8	23717	37.06 AV	54	-16.94	-63.12	4.92	-58.2
9	38648	40.35 PK	74	-33.65	-59.83	4.92	-54.91
10	38648	31.09 AV	54	-22.91	-69.09	4.92	-64.17

Note: Margin value = Emission Level - Limit value

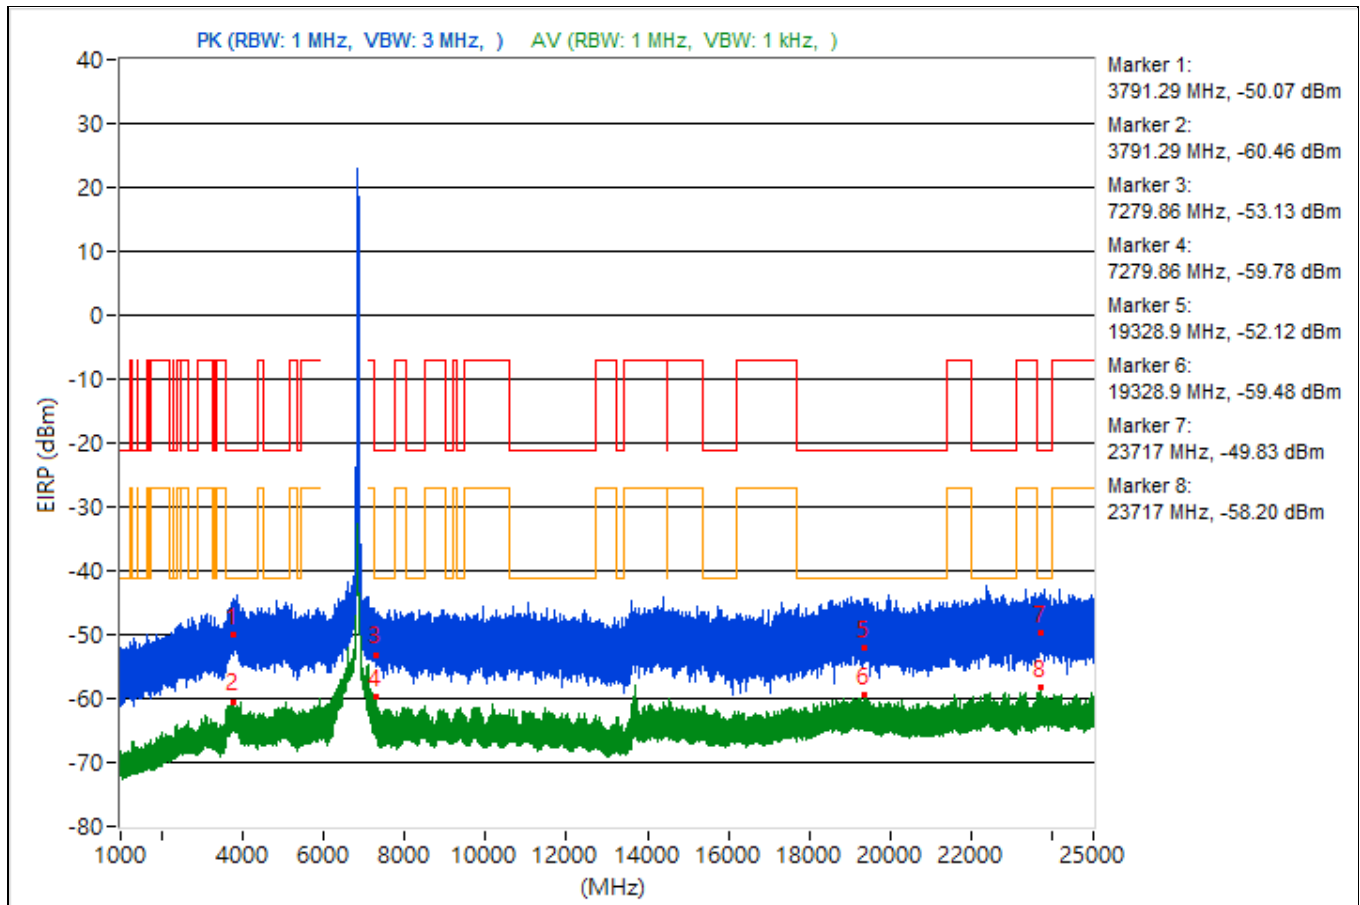


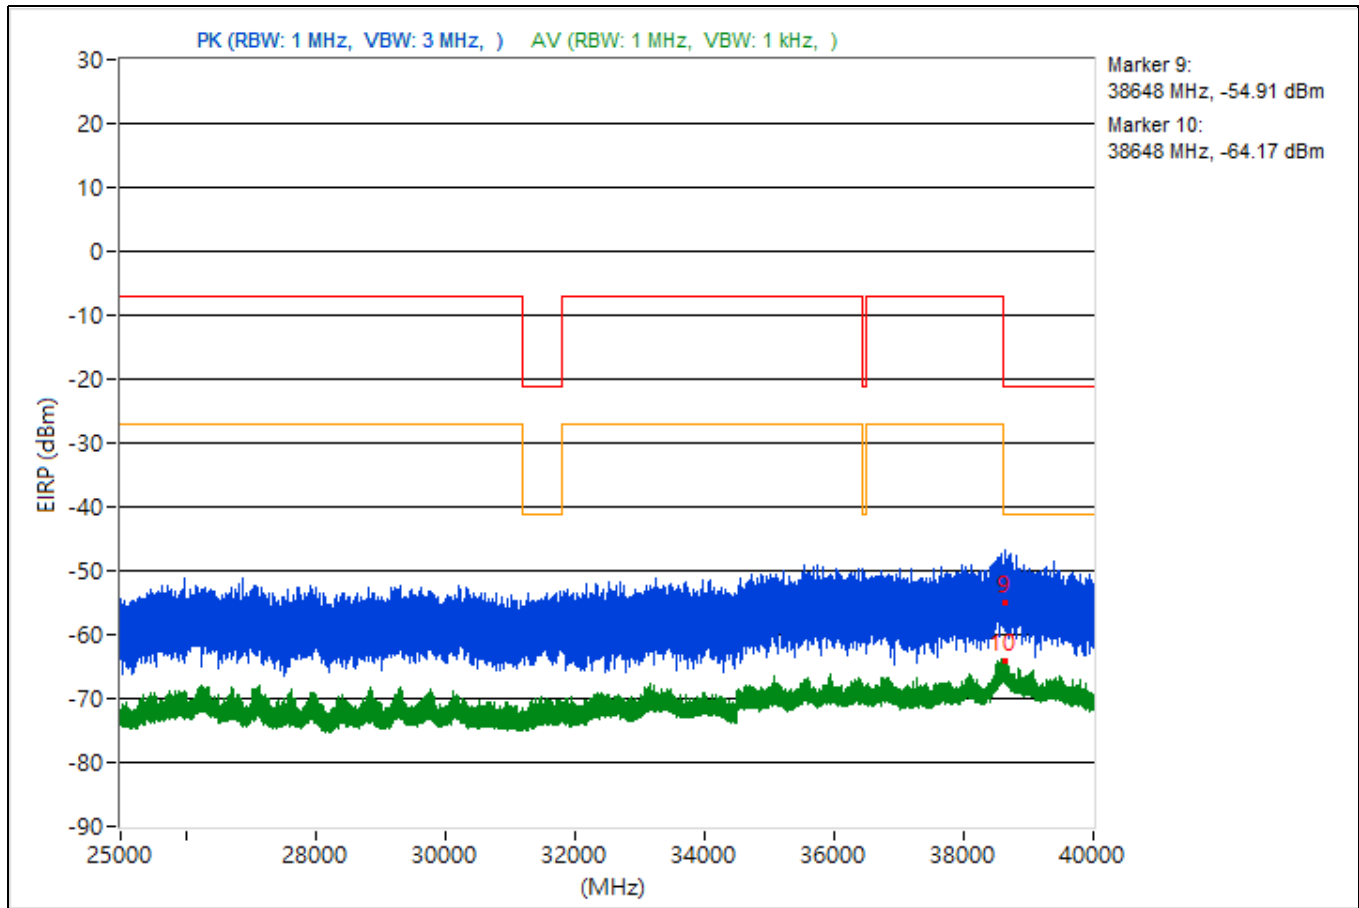


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.99	44.71 PK	74	-29.29	-55.47	4.92	-50.55
2	3763.99	35.45 AV	54	-18.55	-64.73	4.92	-59.81
3	14478.93	44.44 PK	74	-29.56	-55.74	4.92	-50.82
4	14478.93	34.8 AV	54	-19.2	-65.38	4.92	-60.46
5	19318.4	46.26 PK	74	-27.74	-53.92	4.92	-49
6	19318.4	36.26 AV	54	-17.74	-63.92	4.92	-59
7	23702.8	43.71 PK	74	-30.29	-56.47	4.92	-51.55
8	23702.8	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38626.04	43.31 PK	74	-30.69	-56.87	4.92	-51.95
10	38626.04	30.99 AV	54	-23.01	-69.19	4.92	-64.27

Note: Margin value = Emission Level - Limit value

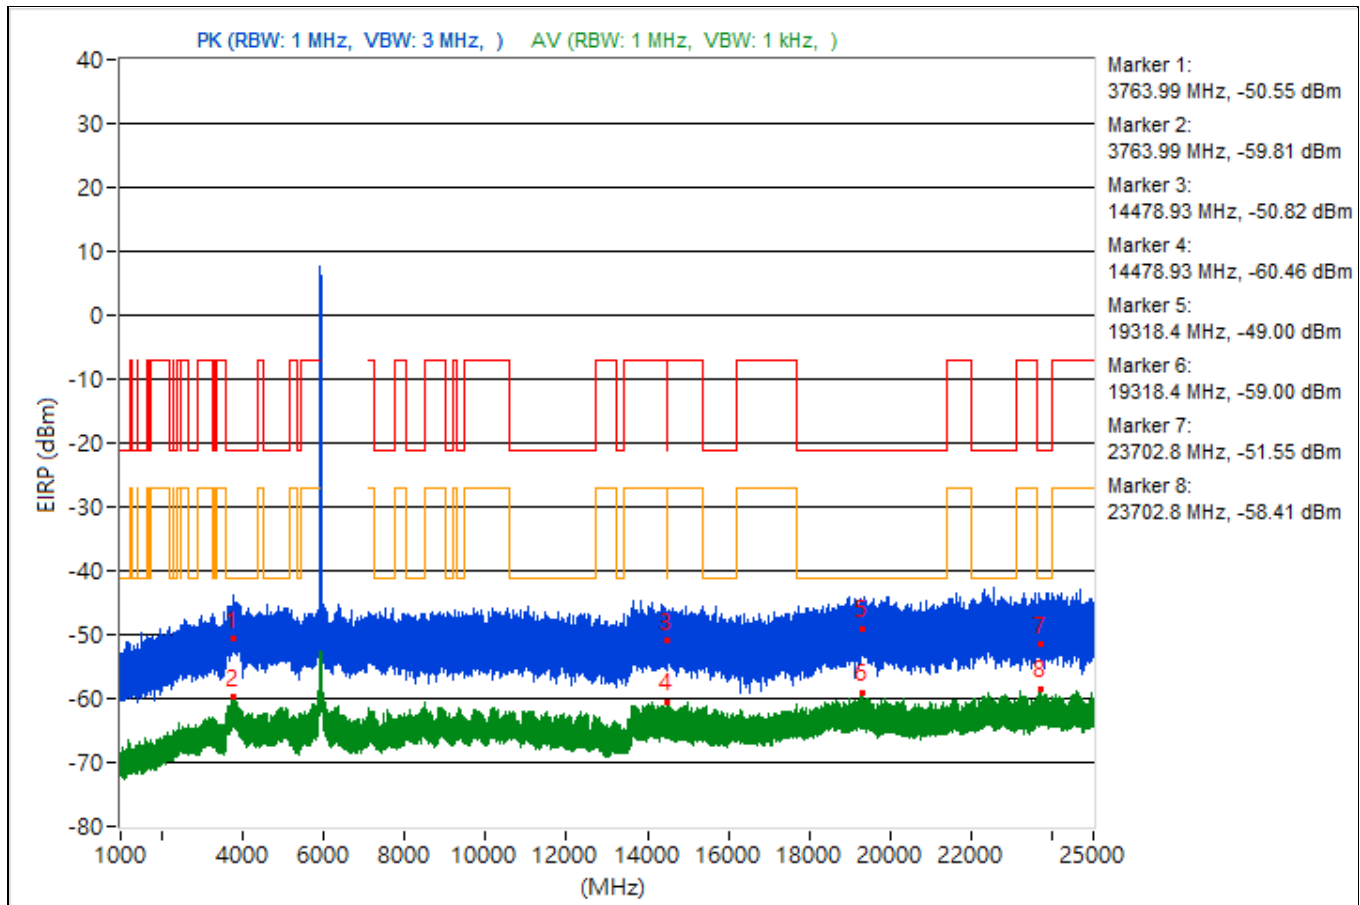


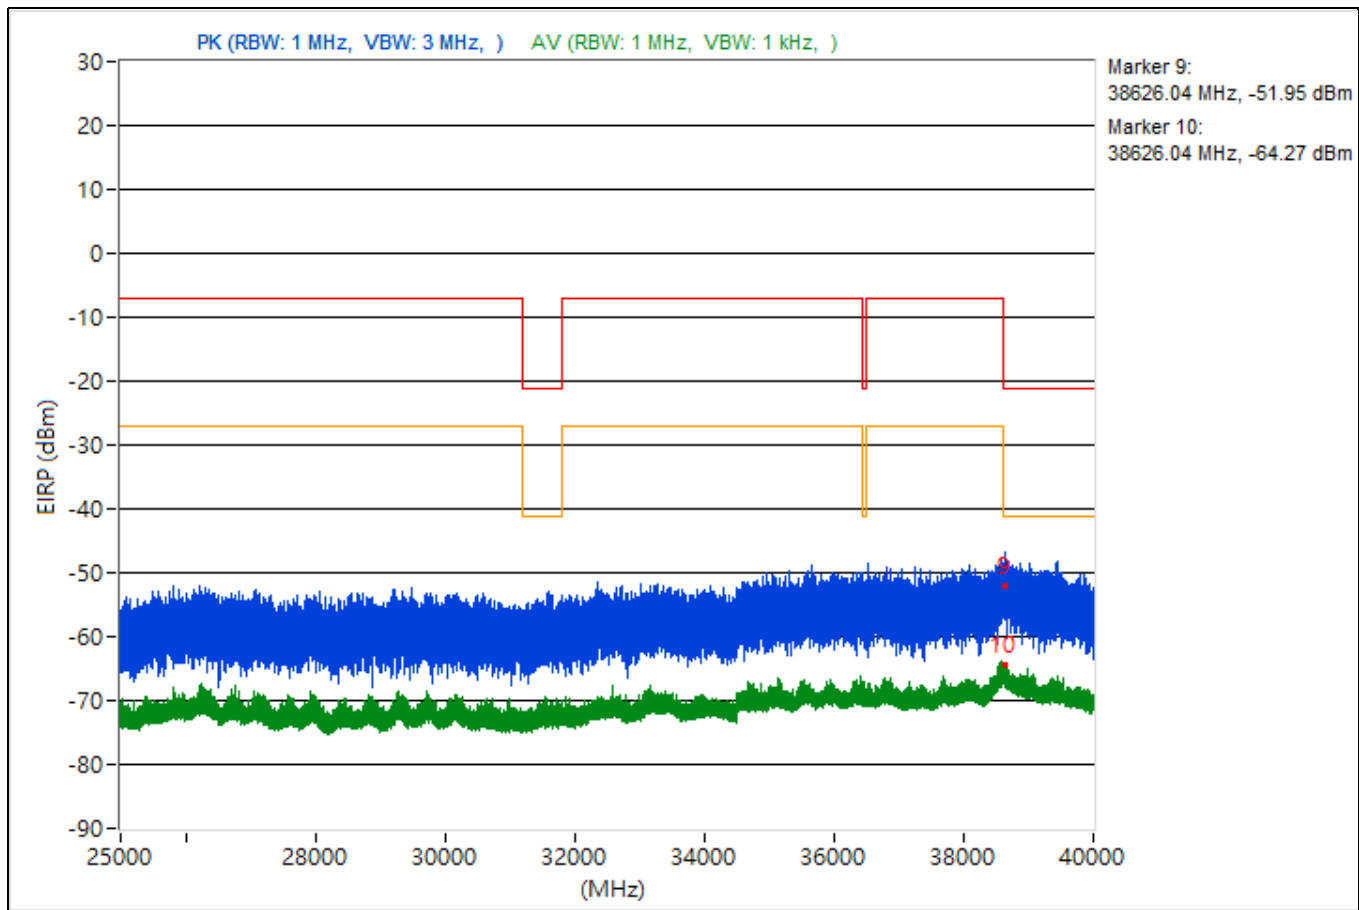


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5414.98	47.91 PK	74	-26.09	-52.27	4.92	-47.35
2	5414.98	35.4 AV	54	-18.6	-64.78	4.92	-59.86
3	14478.58	41.74 PK	74	-32.26	-58.44	4.92	-53.52
4	14478.58	34.72 AV	54	-19.28	-65.46	4.92	-60.54
5	19086.7	46.02 PK	74	-27.98	-54.16	4.92	-49.24
6	19086.7	35.75 AV	54	-18.25	-64.43	4.92	-59.51
7	23721.4	47.68 PK	74	-26.32	-52.5	4.92	-47.58
8	23721.4	36.24 AV	54	-17.76	-63.94	4.92	-59.02
9	38645.16	41.68 PK	74	-32.32	-58.5	4.92	-53.58
10	38645.16	31.13 AV	54	-22.87	-69.05	4.92	-64.13

Note: Margin value = Emission Level - Limit value

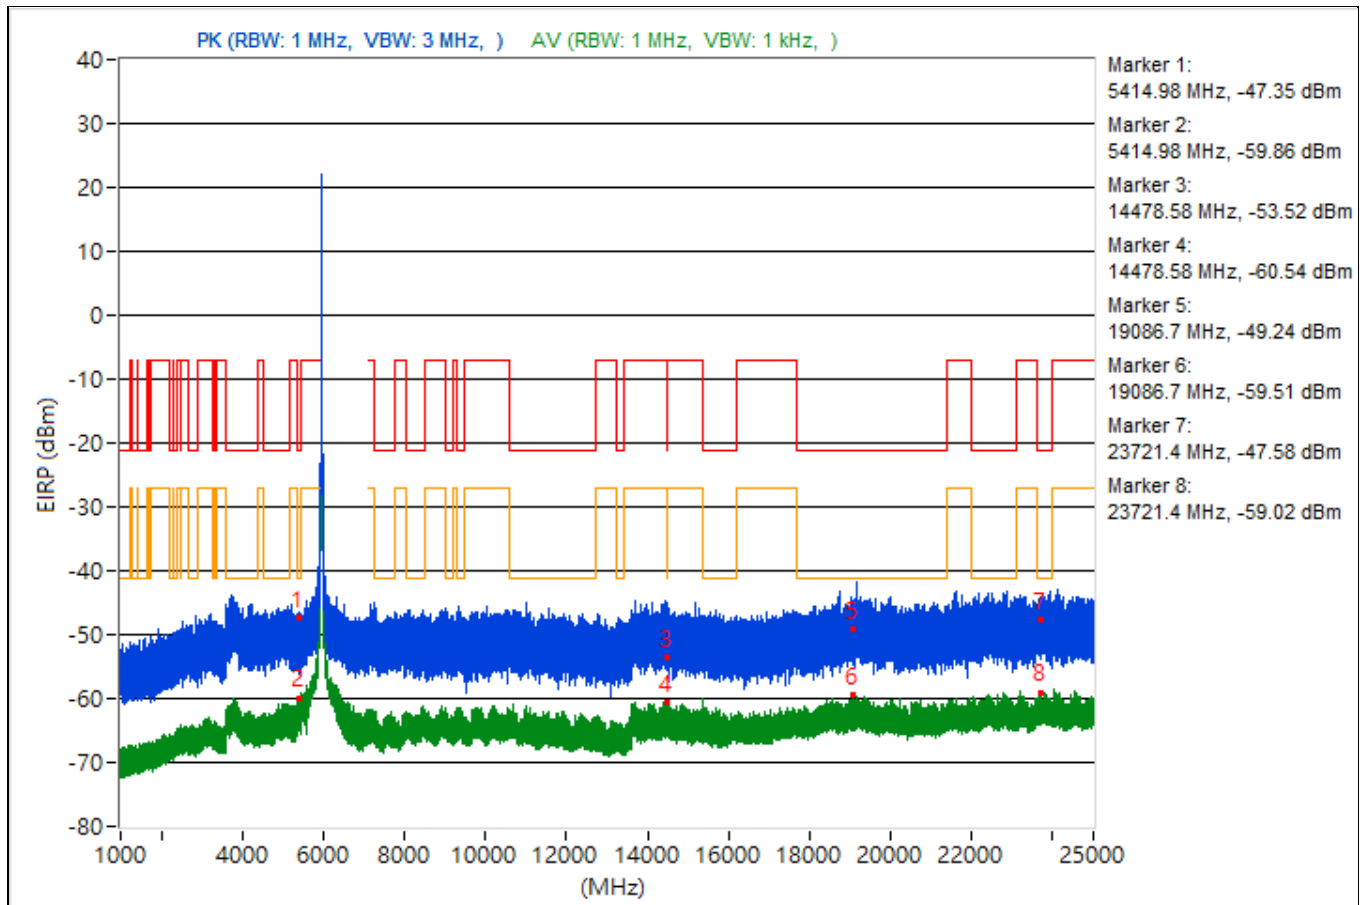


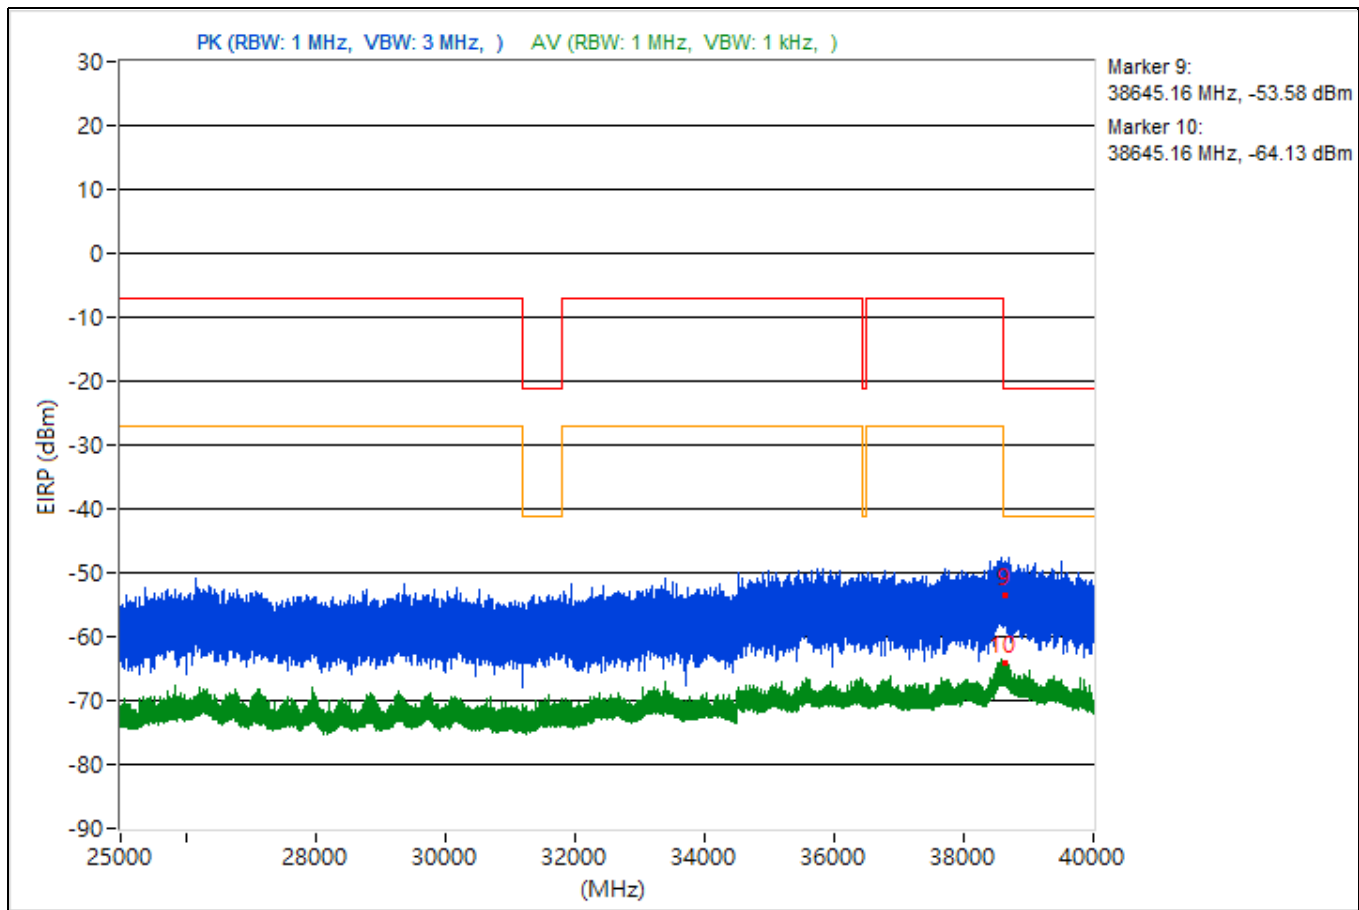


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3736.77	46.78 PK	74	-27.22	-53.4	4.92	-48.48
2	3736.77	36 AV	54	-18	-64.18	4.92	-59.26
3	12349.96	44.37 PK	74	-29.63	-55.81	4.92	-50.89
4	12349.96	36.46 AV	54	-17.54	-63.72	4.92	-58.8
5	19090.1	47.13 PK	74	-26.87	-53.05	4.92	-48.13
6	19090.1	35.52 AV	54	-18.48	-64.66	4.92	-59.74
7	22802.8	48.01 PK	74	-25.99	-52.17	4.92	-47.25
8	22802.8	36.67 AV	54	-17.33	-63.51	4.92	-58.59
9	38643.73	43.61 PK	74	-30.39	-56.57	4.92	-51.65
10	38643.73	31.6 AV	54	-22.4	-68.58	4.92	-63.66

Note: Margin value = Emission Level - Limit value

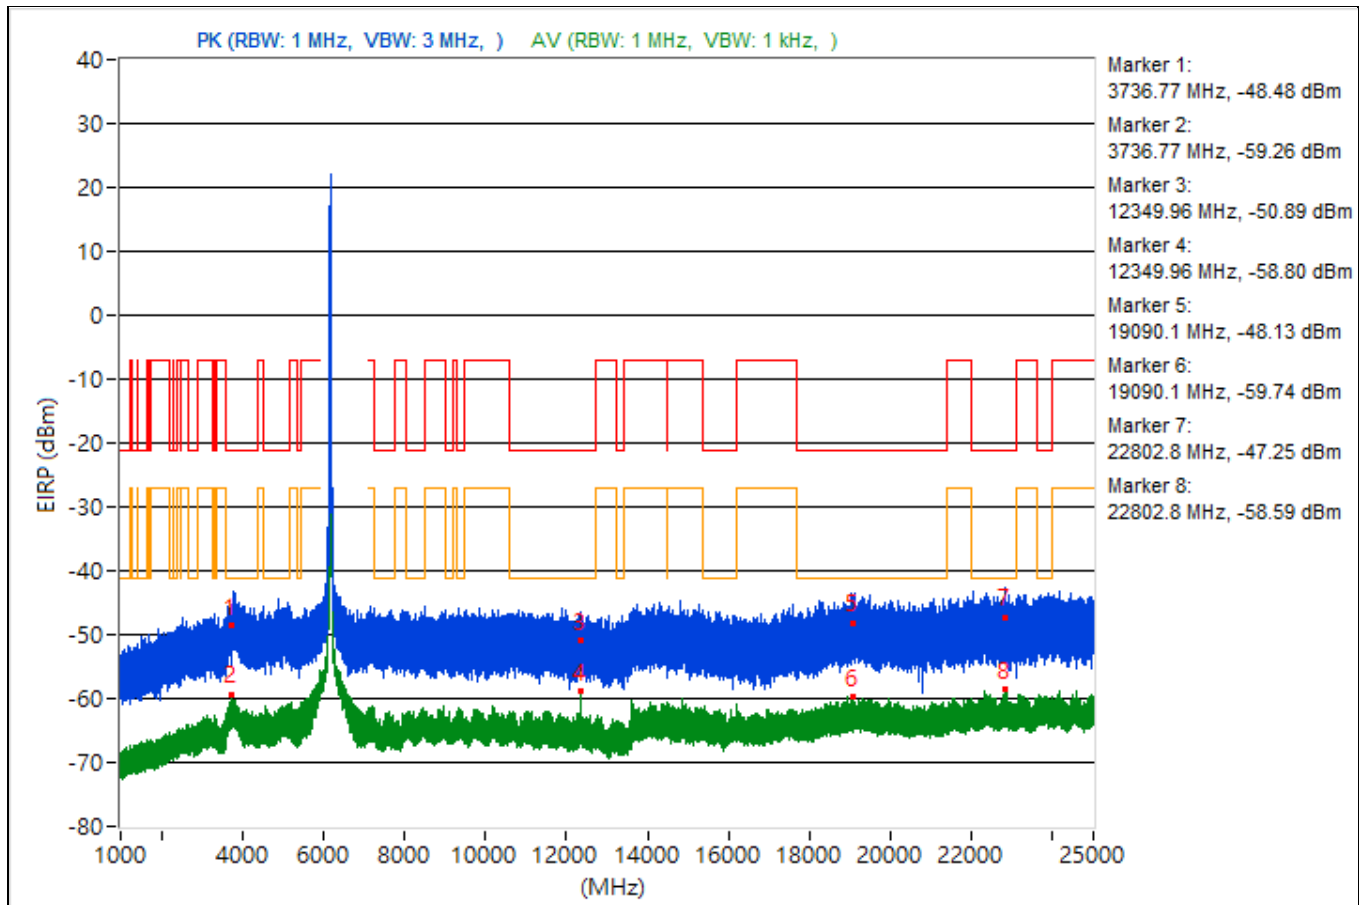


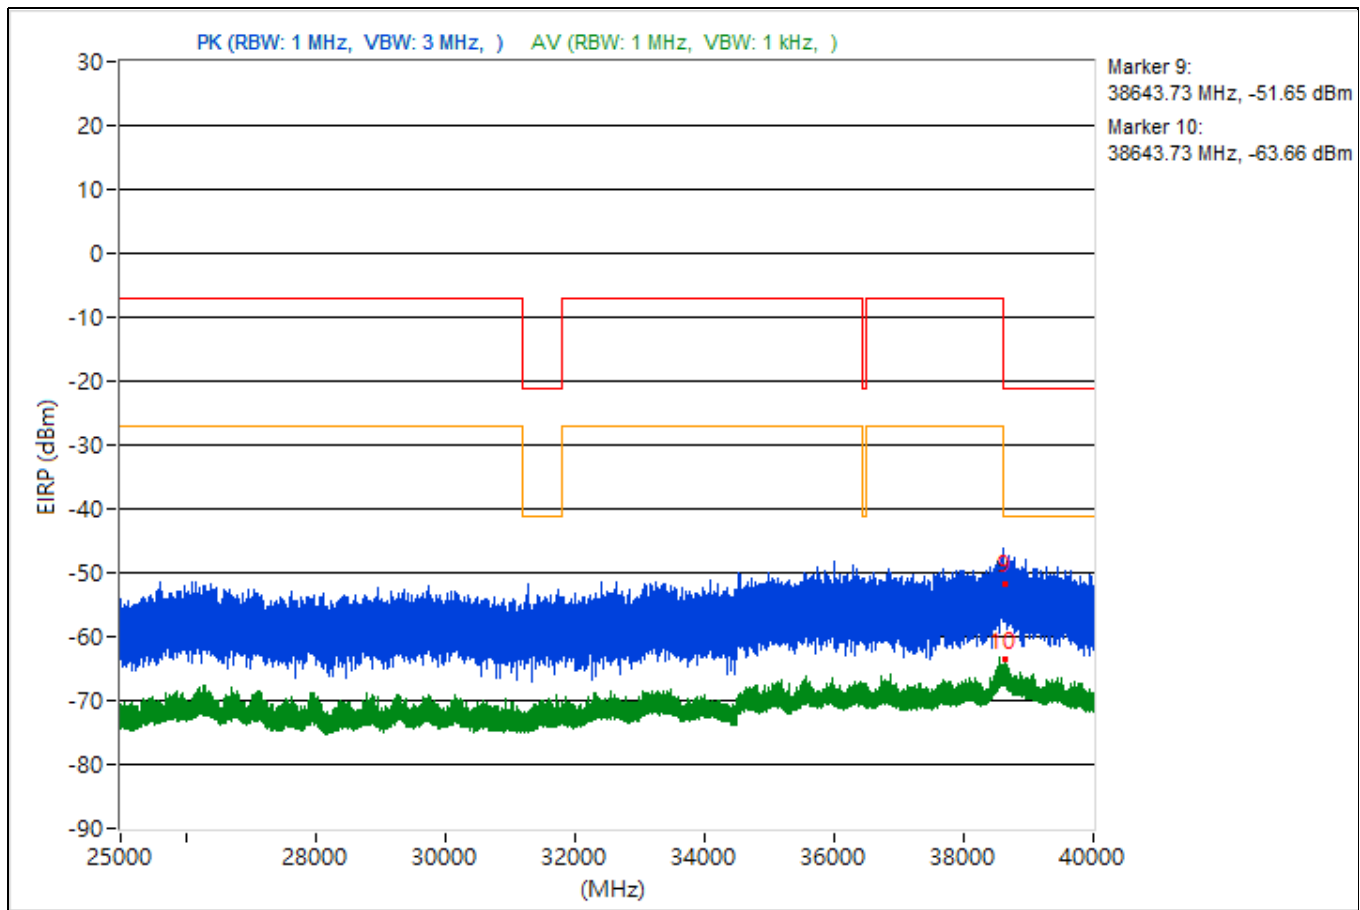


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3678.04	44.4 PK	74	-29.6	-55.78	4.92	-50.86
2	3678.04	35.27 AV	54	-18.73	-64.91	4.92	-59.99
3	14484.27	46.36 PK	74	-27.64	-53.82	4.92	-48.9
4	14484.27	34.91 AV	54	-19.09	-65.27	4.92	-60.35
5	18973.5	45.54 PK	74	-28.46	-54.64	4.92	-49.72
6	18973.5	35.67 AV	54	-18.33	-64.51	4.92	-59.59
7	22417.1	44.88 PK	74	-29.12	-55.3	4.92	-50.38
8	22417.1	36.13 AV	54	-17.87	-64.05	4.92	-59.13
9	38617.16	43.91 PK	74	-30.09	-56.27	4.92	-51.35
10	38617.16	31.09 AV	54	-22.91	-69.09	4.92	-64.17

Note: Margin value = Emission Level - Limit value

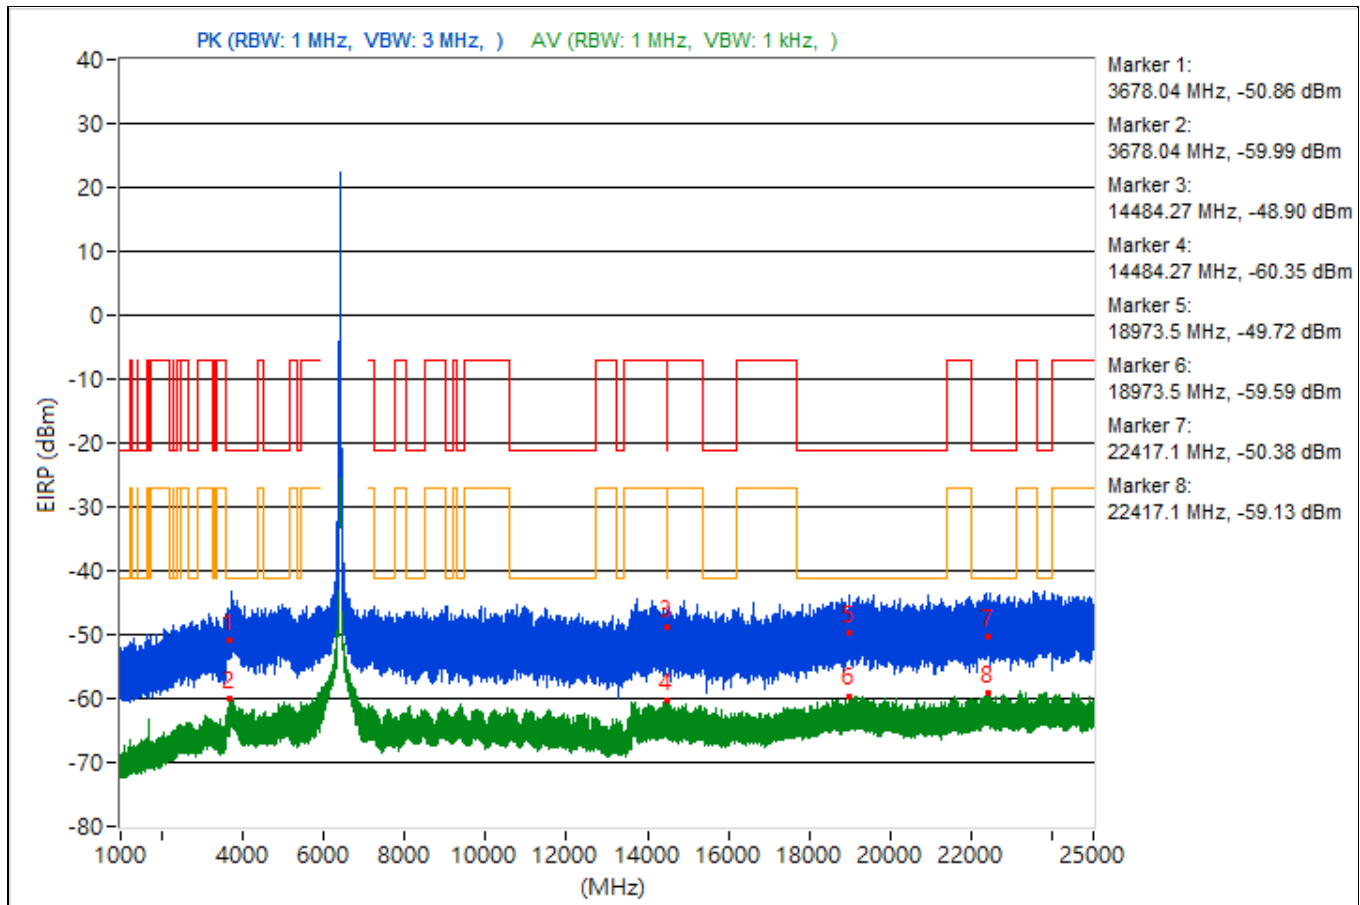


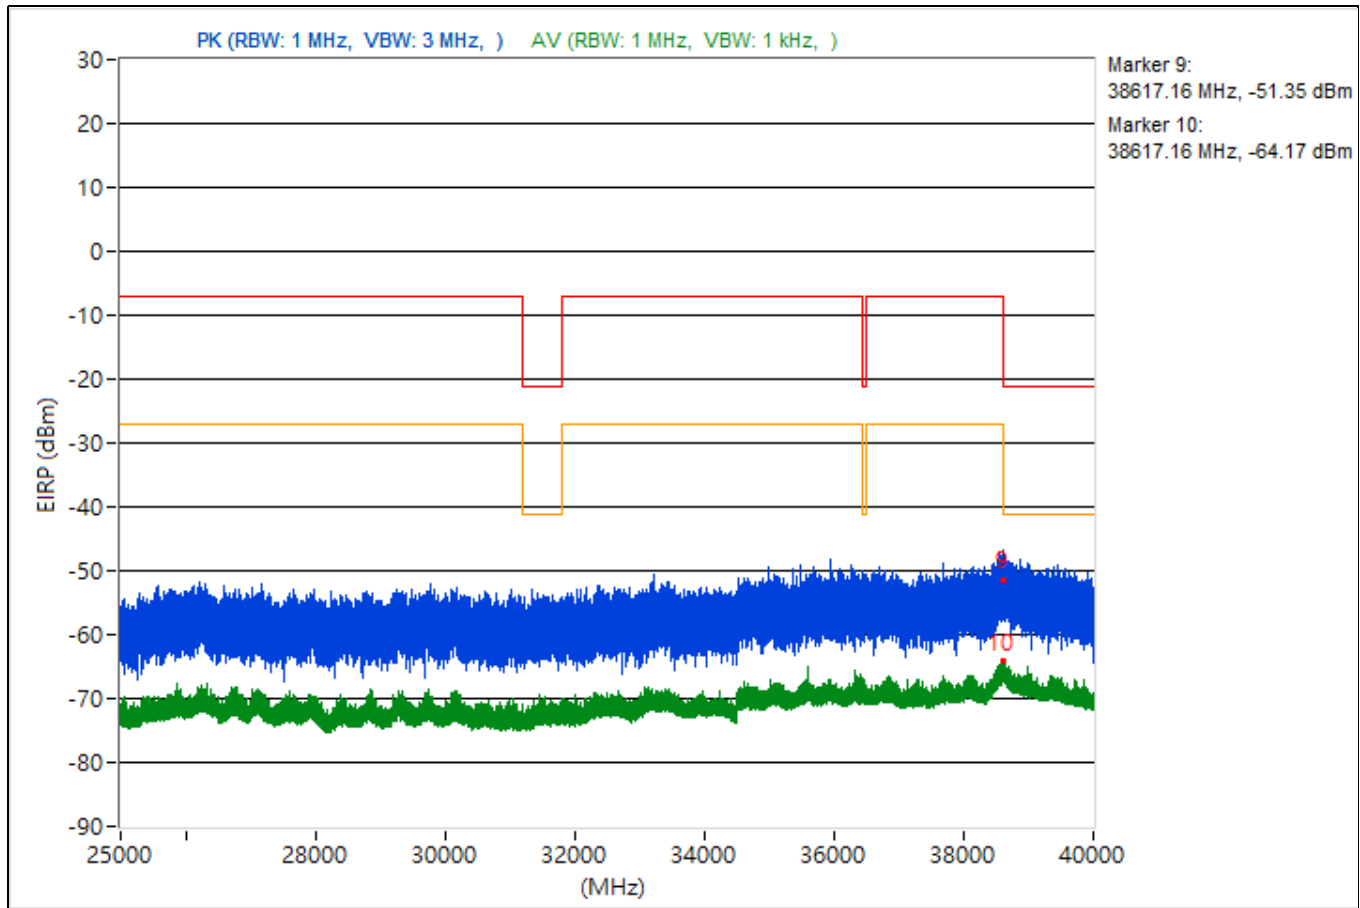


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3774.72	47.53 PK	74	-26.47	-52.65	4.92	-47.73
2	3774.72	35.03 AV	54	-18.97	-65.15	4.92	-60.23
3	8434.4	40.81 PK	74	-33.19	-59.37	4.92	-54.45
4	8434.4	34.81 AV	54	-19.19	-65.37	4.92	-60.45
5	20680.7	44.05 PK	74	-29.95	-56.13	4.92	-51.21
6	20680.7	35.71 AV	54	-18.29	-64.47	4.92	-59.55
7	22373.9	46.16 PK	74	-27.84	-54.02	4.92	-49.1
8	22373.9	36.51 AV	54	-17.49	-63.67	4.92	-58.75
9	38605.51	42.37 PK	74	-31.63	-57.81	4.92	-52.89
10	38605.51	31.98 AV	54	-22.02	-68.2	4.92	-63.28

Note: Margin value = Emission Level - Limit value

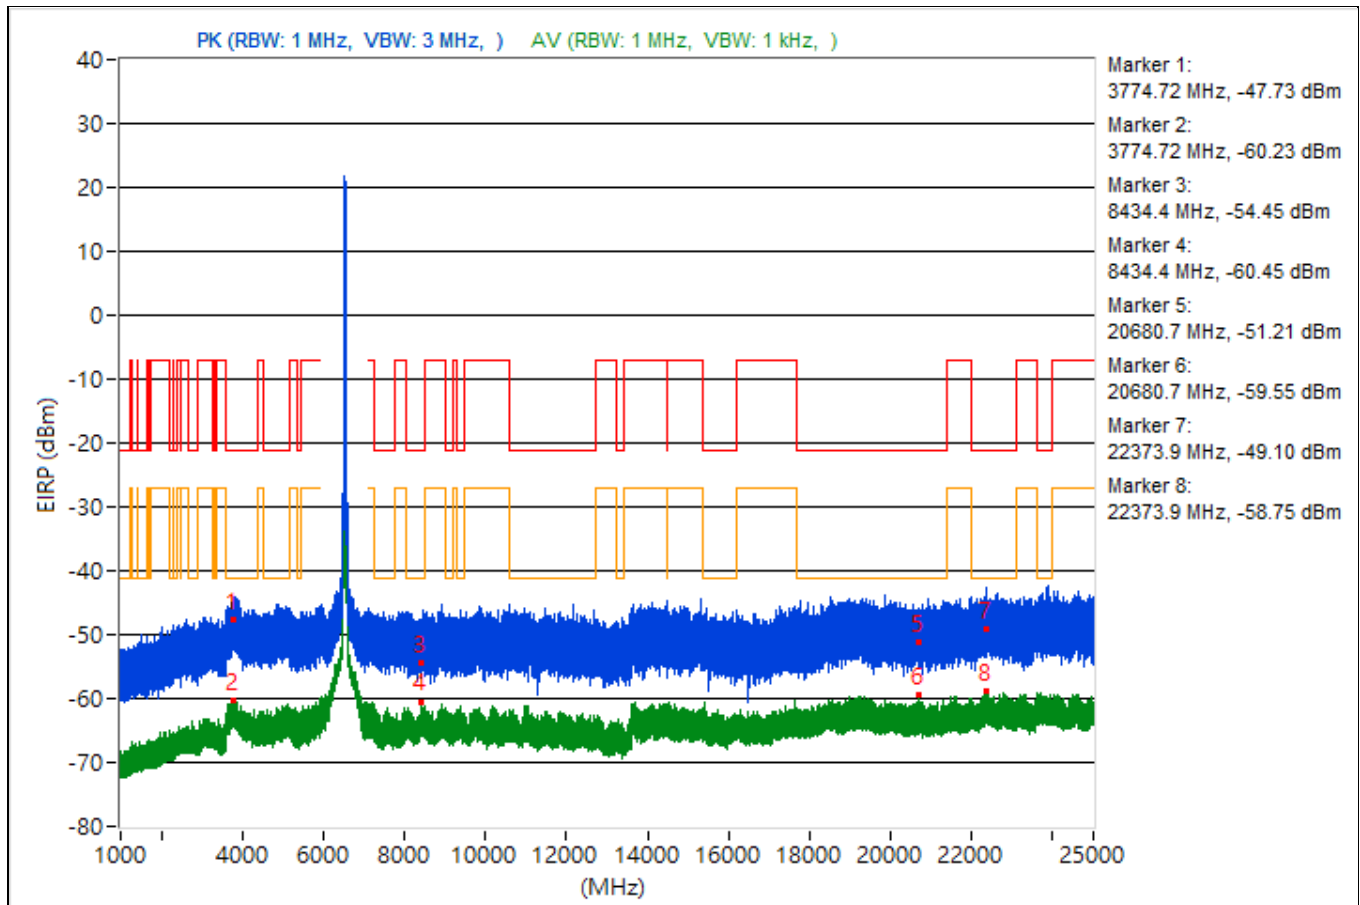


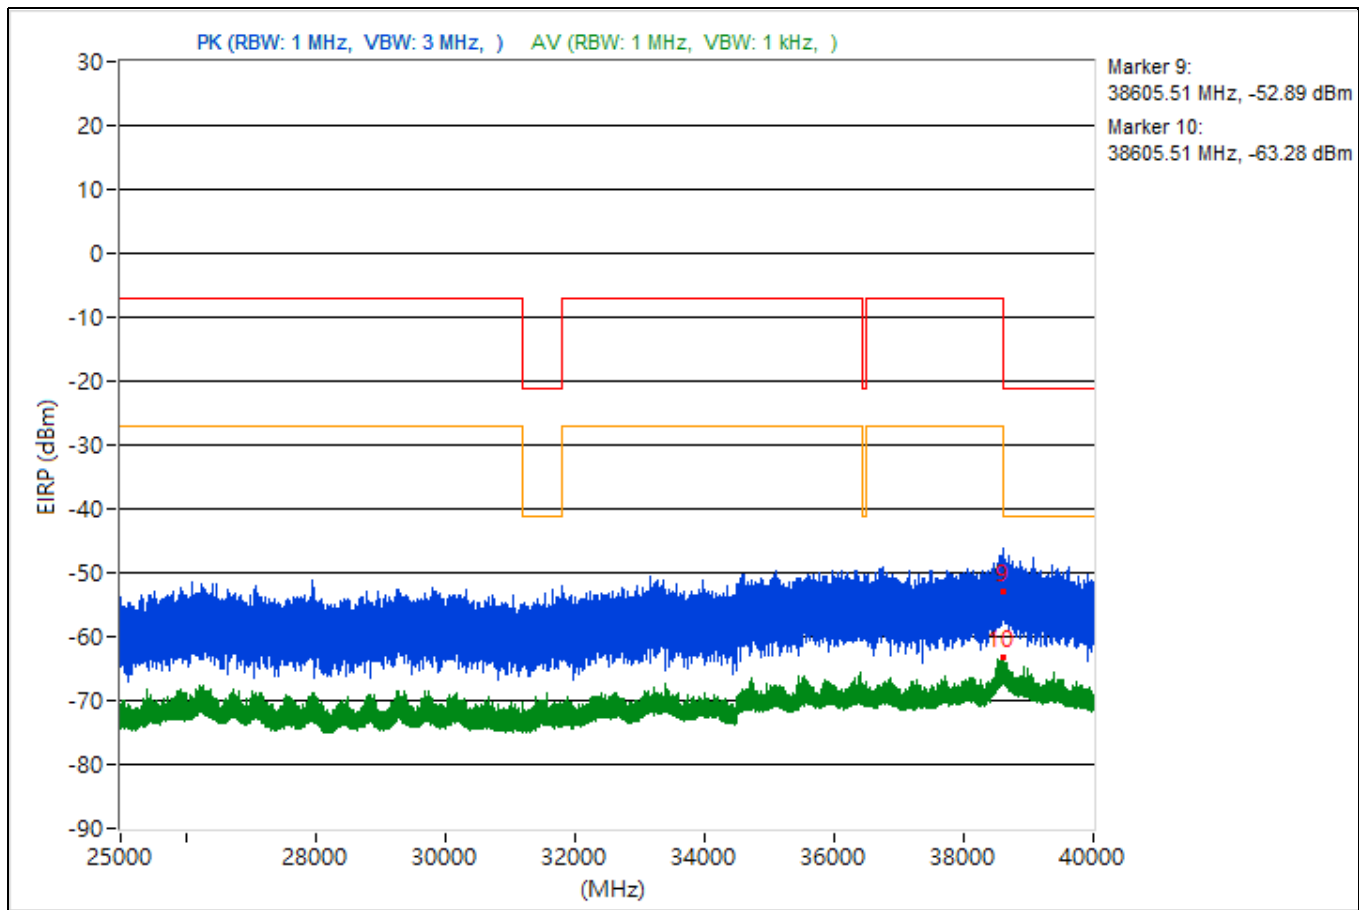


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3737.31	46.29 PK	74	-27.71	-53.89	4.92	-48.97
2	3737.31	35.17 AV	54	-18.83	-65.01	4.92	-60.09
3	9385.6	40.92 PK	74	-33.08	-59.26	4.92	-54.34
4	9385.6	34.35 AV	54	-19.65	-65.83	4.92	-60.91
5	19334.1	44.76 PK	74	-29.24	-55.42	4.92	-50.5
6	19334.1	35.57 AV	54	-18.43	-64.61	4.92	-59.69
7	23788.7	46.16 PK	74	-27.84	-54.02	4.92	-49.1
8	23788.7	36.21 AV	54	-17.79	-63.97	4.92	-59.05
9	38609.07	40.4 PK	74	-33.6	-59.78	4.92	-54.86
10	38609.07	31.57 AV	54	-22.43	-68.61	4.92	-63.69

Note: Margin value = Emission Level - Limit value

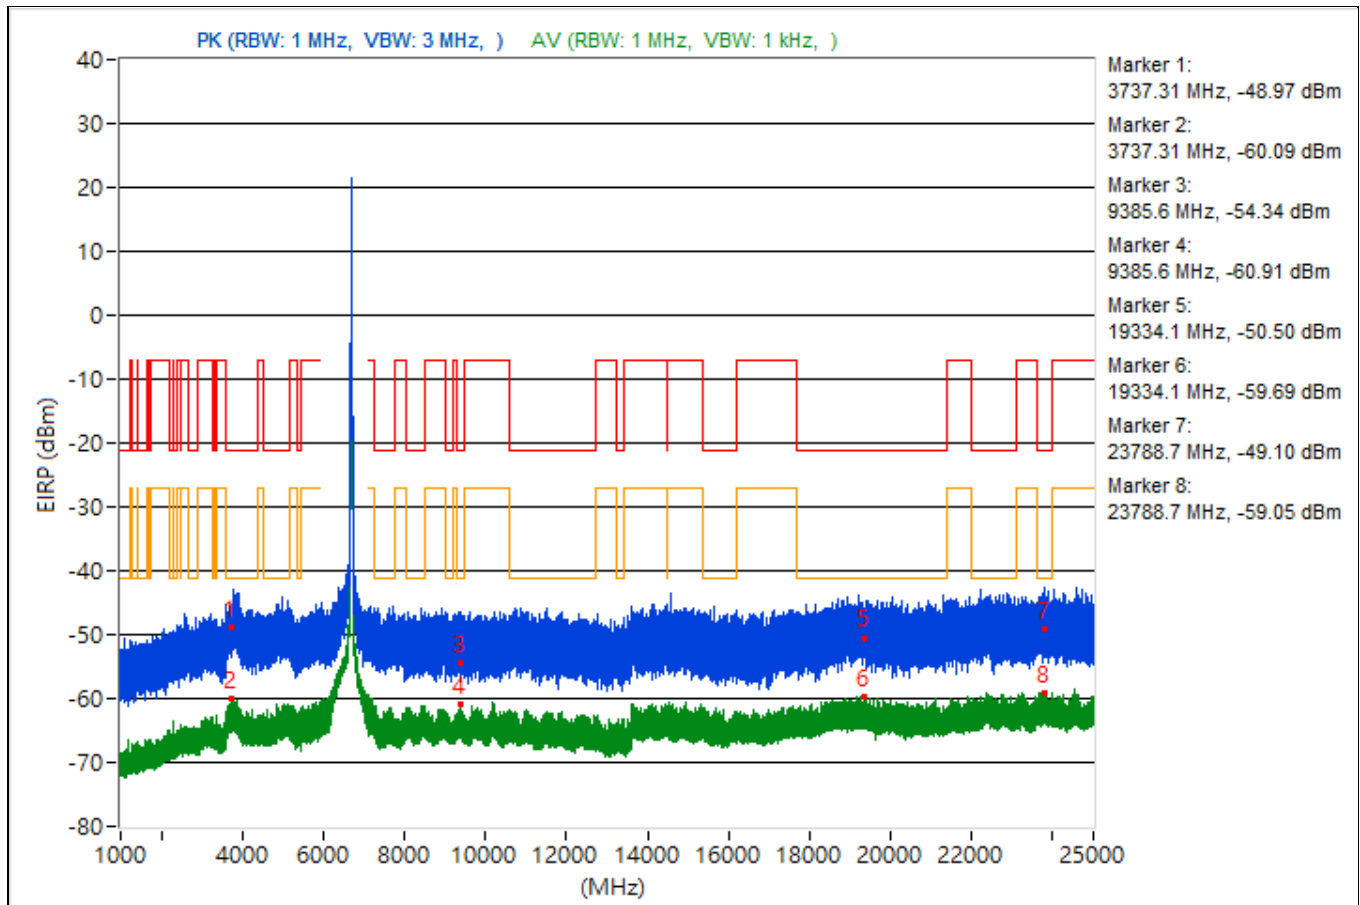


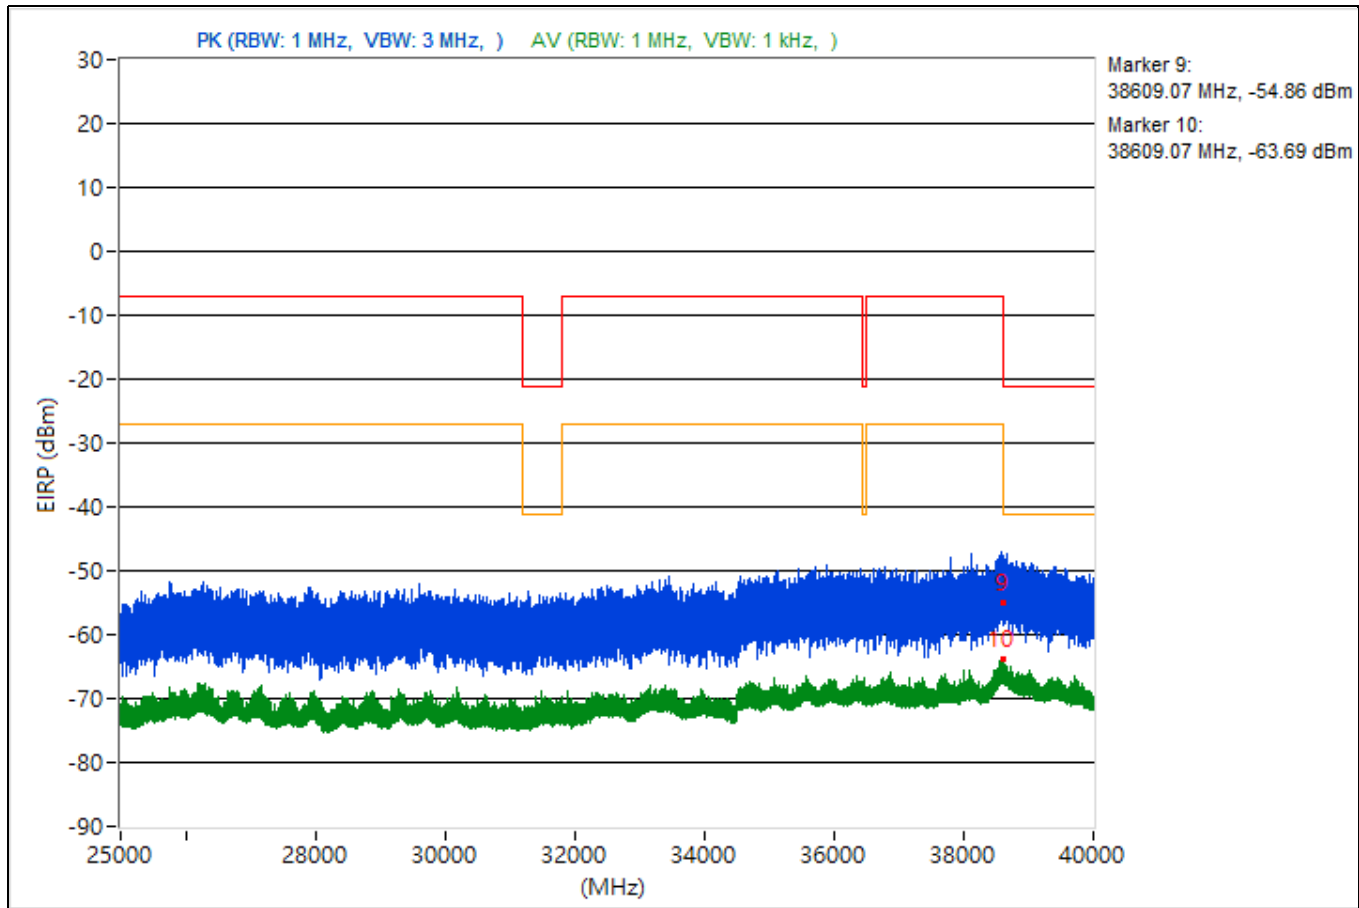


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3870	46.34 PK	74	-27.66	-53.84	4.92	-48.92
2	3870	35.16 AV	54	-18.84	-65.02	4.92	-60.1
3	7255.67	45.06 PK	74	-28.94	-55.12	4.92	-50.2
4	7255.67	35.13 AV	54	-18.87	-65.05	4.92	-60.13
5	19230	46.08 PK	74	-27.92	-54.1	4.92	-49.18
6	19230	35.64 AV	54	-18.36	-64.54	4.92	-59.62
7	22450.1	48.26 PK	74	-25.74	-51.92	4.92	-47
8	22450.1	36.17 AV	54	-17.83	-64.01	4.92	-59.09
9	38636.36	42.34 PK	74	-31.66	-57.84	4.92	-52.92
10	38636.36	31.45 AV	54	-22.55	-68.73	4.92	-63.81

Note: Margin value = Emission Level - Limit value

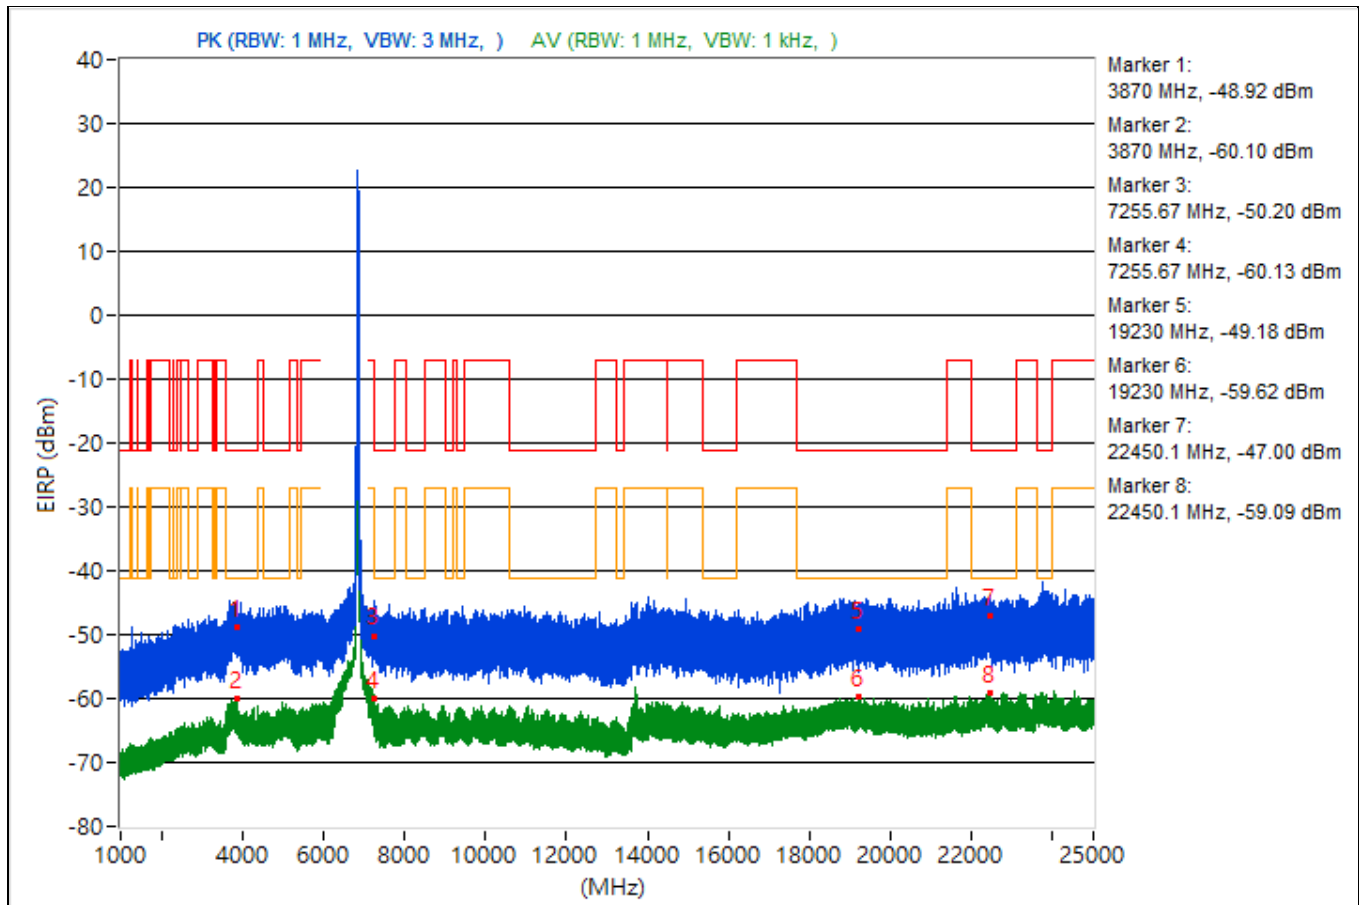


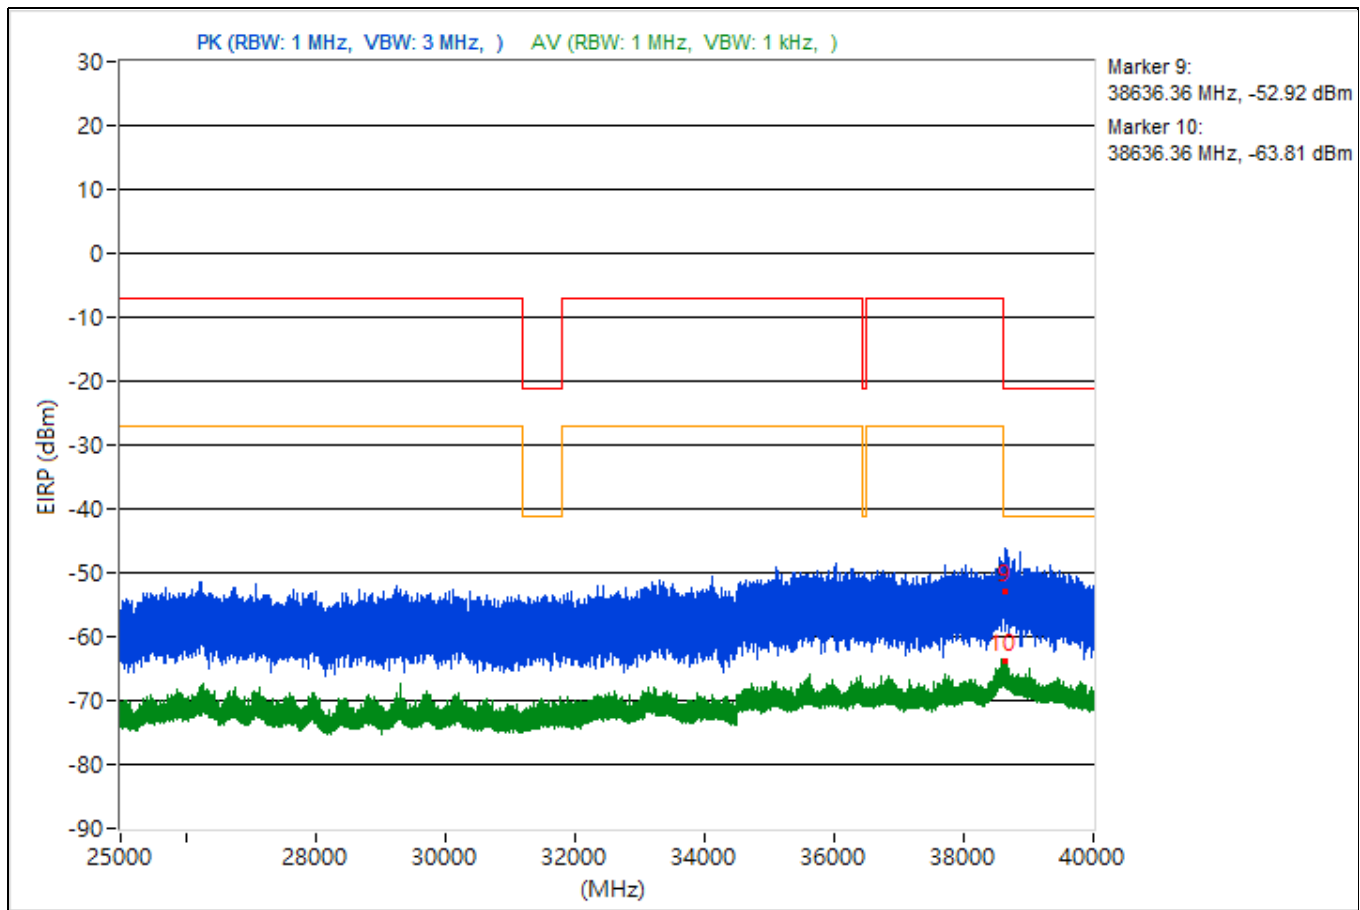


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5023.52	46.13 PK	74	-27.87	-54.05	4.92	-49.13
2	5023.52	37.89 AV	54	-16.11	-62.29	4.92	-57.37
3	14471.64	43.7 PK	74	-30.3	-56.48	4.92	-51.56
4	14471.64	34.38 AV	54	-19.62	-65.8	4.92	-60.88
5	18865.9	47.79 PK	74	-26.21	-52.39	4.92	-47.47
6	18865.9	36 AV	54	-18	-64.18	4.92	-59.26
7	23653.3	43.73 PK	74	-30.27	-56.45	4.92	-51.53
8	23653.3	36.41 AV	54	-17.59	-63.77	4.92	-58.85
9	38627.64	40.06 PK	74	-33.94	-60.12	4.92	-55.2
10	38627.64	31.17 AV	54	-22.83	-69.01	4.92	-64.09

Note: Margin value = Emission Level - Limit value

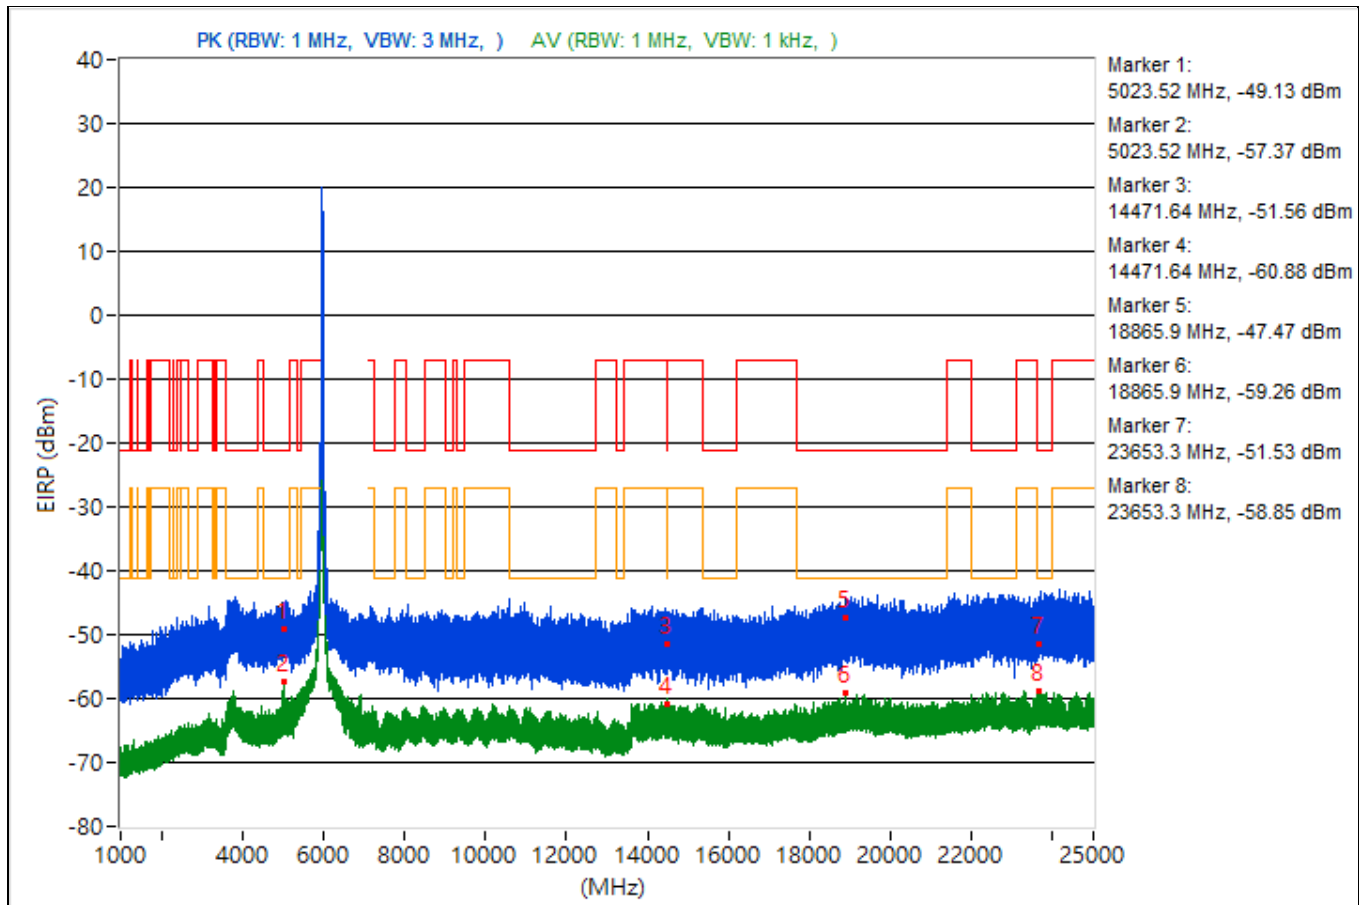


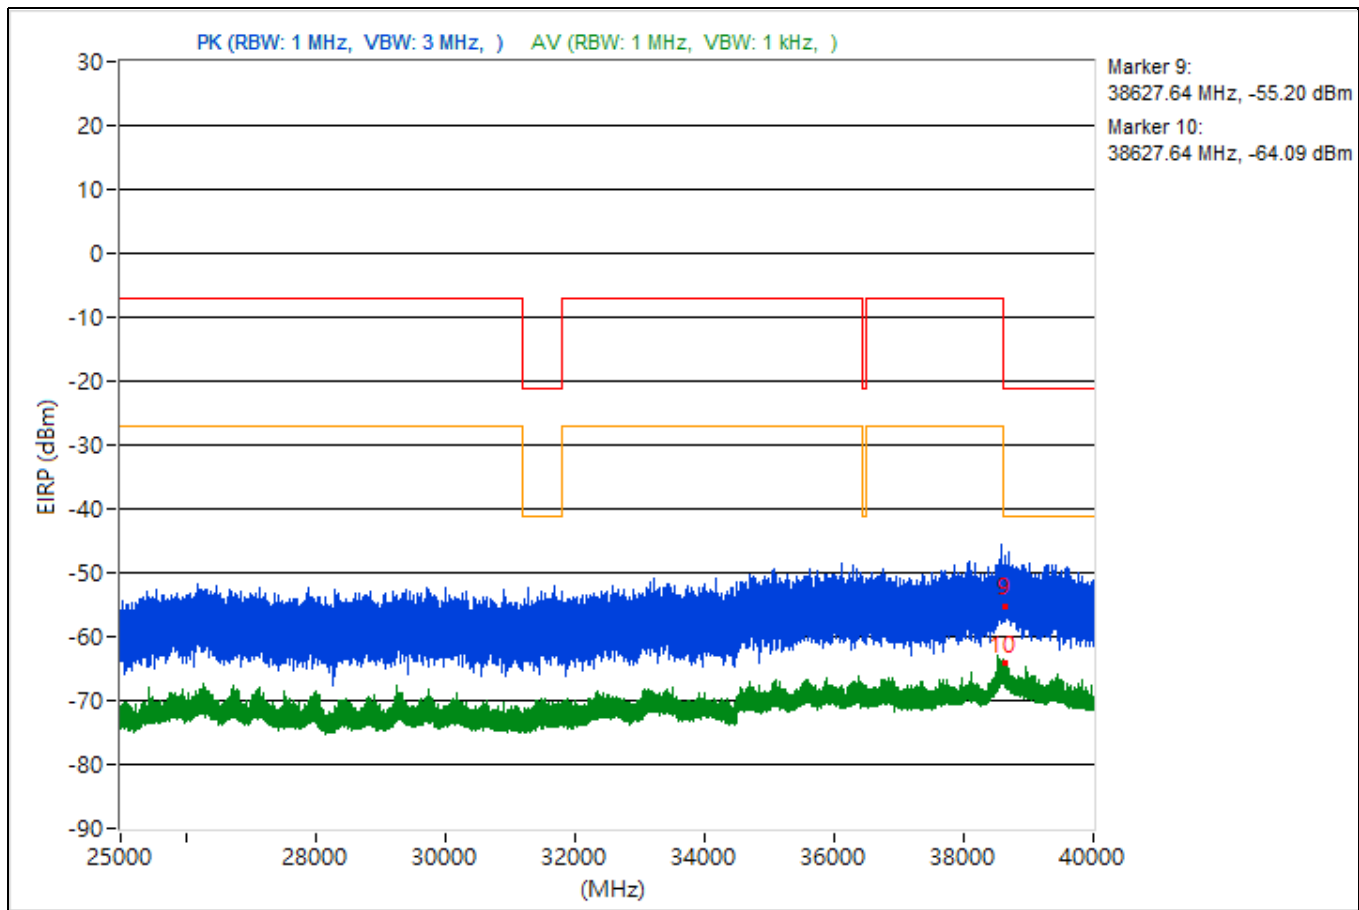


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.14	44.26 PK	74	-29.74	-55.92	4.92	-51
2	5451.14	35.64 AV	54	-18.36	-64.54	4.92	-59.62
3	12327.91	42.91 PK	74	-31.09	-57.27	4.92	-52.35
4	12327.91	34.75 AV	54	-19.25	-65.43	4.92	-60.51
5	19175.5	46.8 PK	74	-27.2	-53.38	4.92	-48.46
6	19175.5	35.71 AV	54	-18.29	-64.47	4.92	-59.55
7	22898.4	44.75 PK	74	-29.25	-55.43	4.92	-50.51
8	22898.4	36.64 AV	54	-17.36	-63.54	4.92	-58.62
9	38629.16	41.62 PK	74	-32.38	-58.56	4.92	-53.64
10	38629.16	31.45 AV	54	-22.55	-68.73	4.92	-63.81

Note: Margin value = Emission Level - Limit value

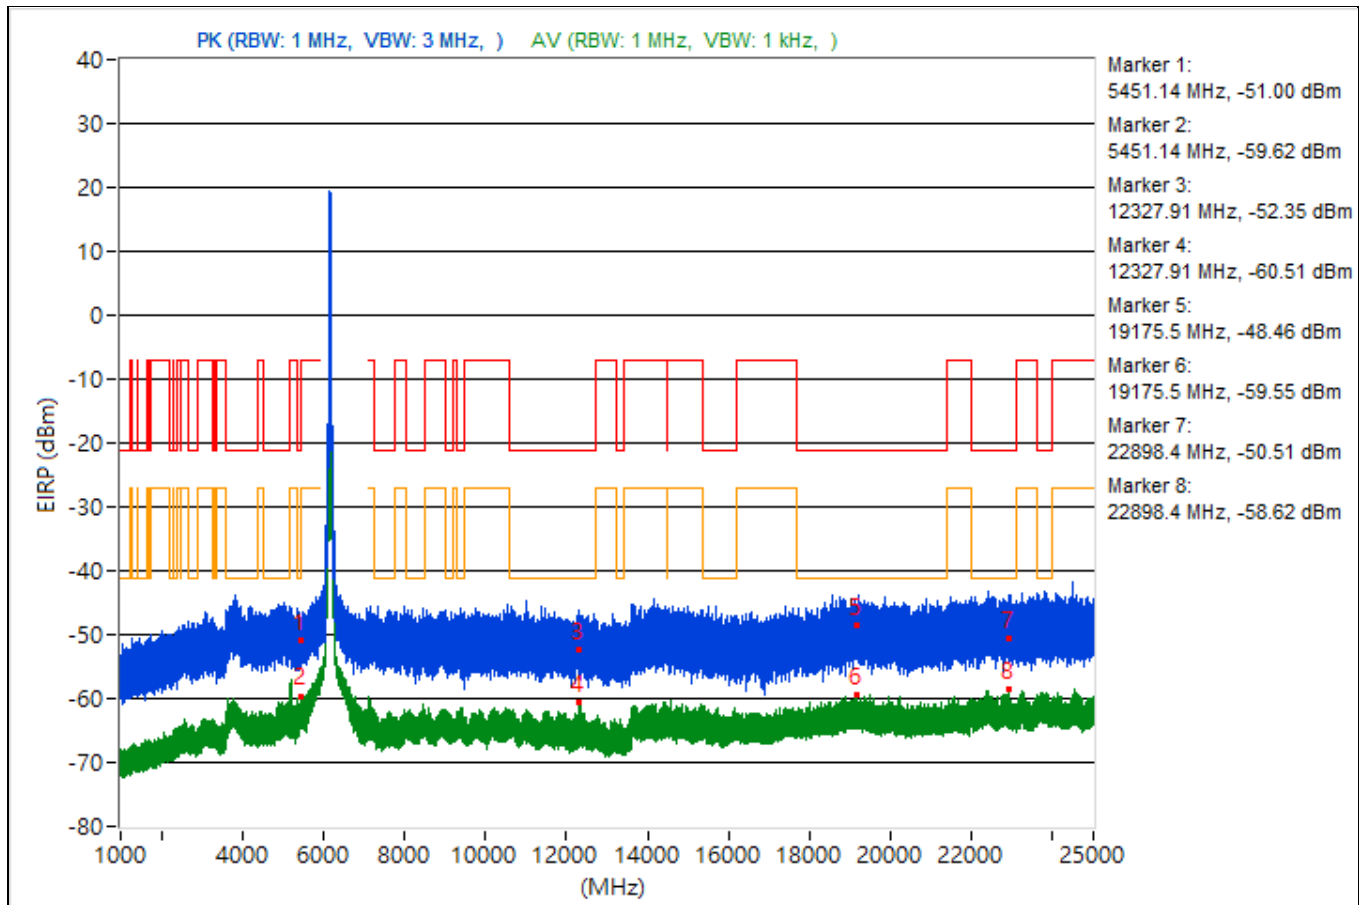


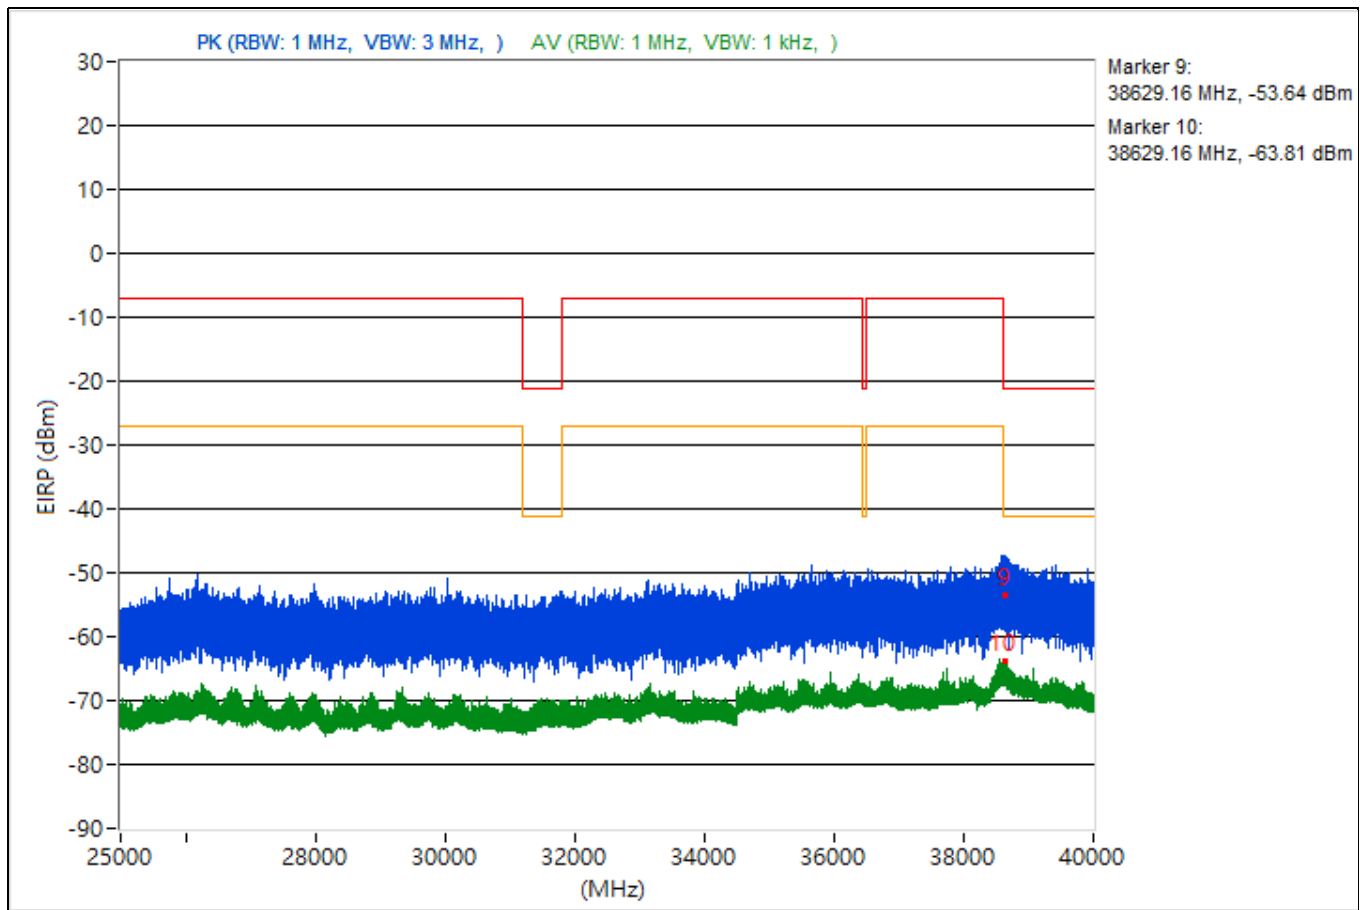


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5426.8	45.29 PK	74	-28.71	-54.89	4.92	-49.97
2	5426.8	37.27 AV	54	-16.73	-62.91	4.92	-57.99
3	11108.36	44.19 PK	74	-29.81	-55.99	4.92	-51.07
4	11108.36	34.56 AV	54	-19.44	-65.62	4.92	-60.7
5	19298.3	45.32 PK	74	-28.68	-54.86	4.92	-49.94
6	19298.3	35.78 AV	54	-18.22	-64.4	4.92	-59.48
7	22381.4	48.11 PK	74	-25.89	-52.07	4.92	-47.15
8	22381.4	36.77 AV	54	-17.23	-63.41	4.92	-58.49
9	38641.96	45.13 PK	74	-28.87	-55.05	4.92	-50.13
10	38641.96	31.16 AV	54	-22.84	-69.02	4.92	-64.1

Note: Margin value = Emission Level - Limit value

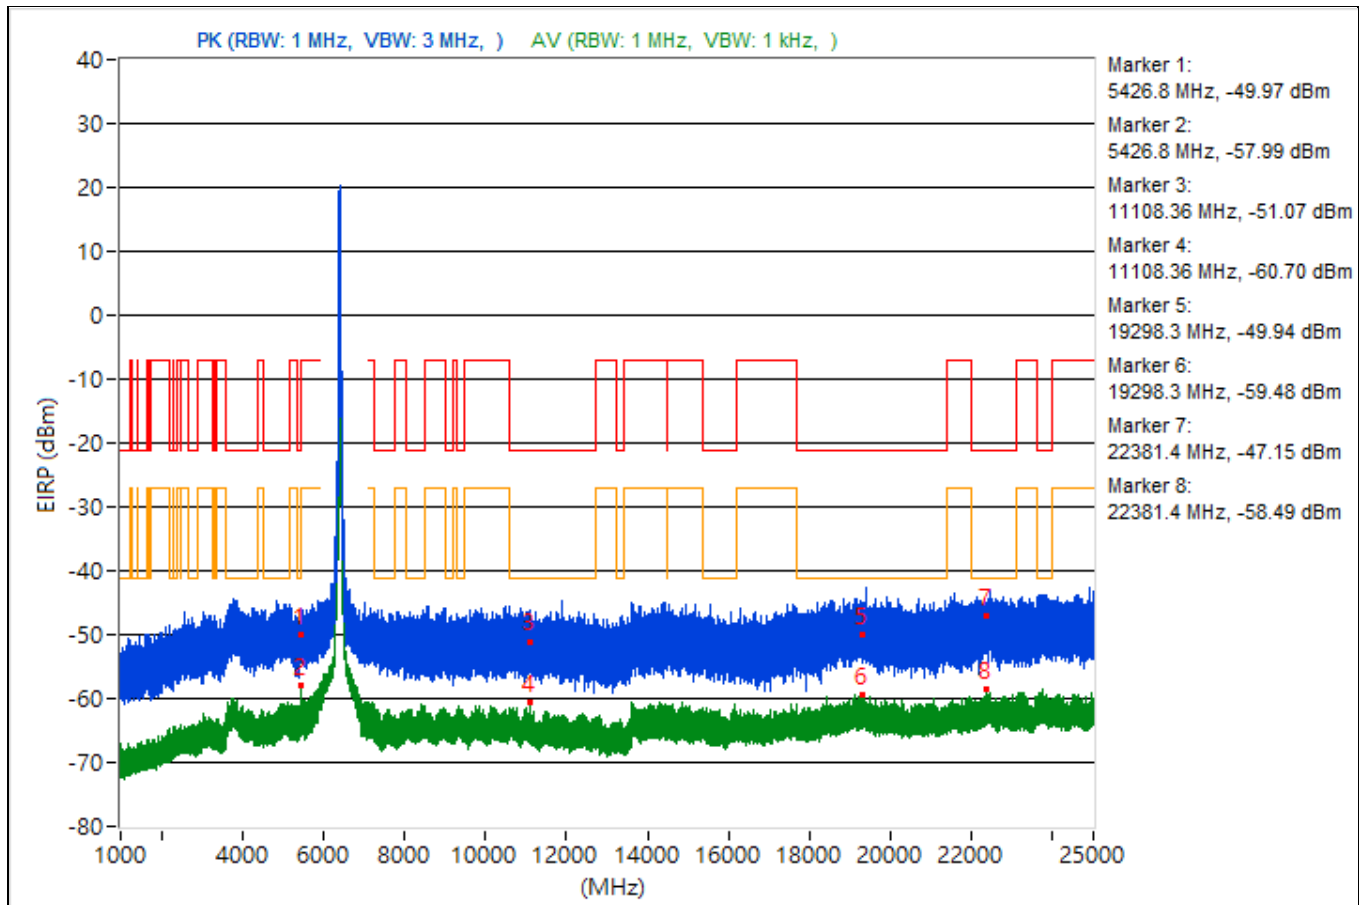


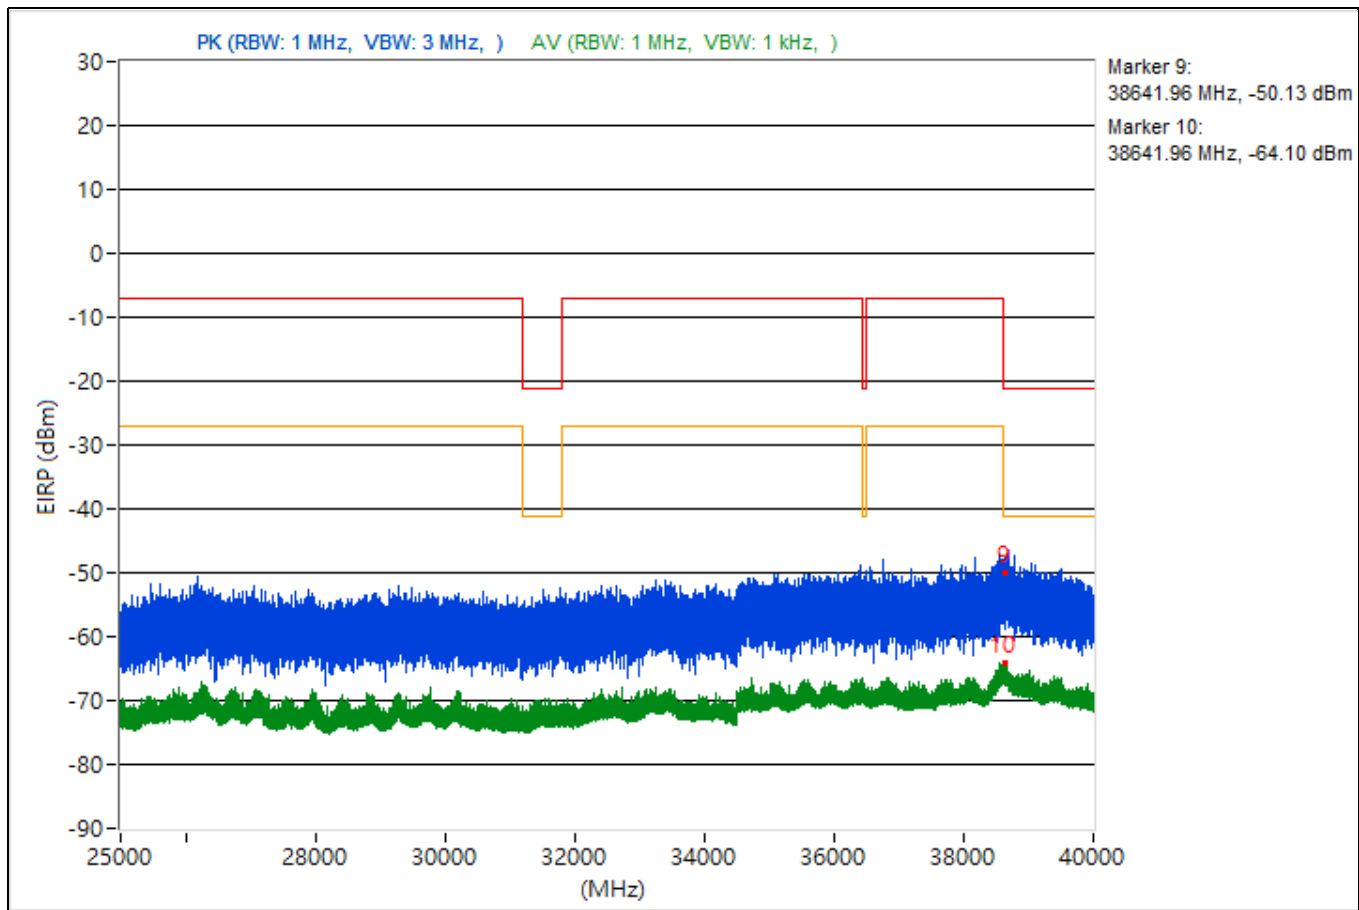


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.37	45.45 PK	74	-28.55	-54.73	4.92	-49.81
2	3798.37	36.08 AV	54	-17.92	-64.1	4.92	-59.18
3	14485.16	46.54 PK	74	-27.46	-53.64	4.92	-48.72
4	14485.16	34.76 AV	54	-19.24	-65.42	4.92	-60.5
5	19209.1	44.29 PK	74	-29.71	-55.89	4.92	-50.97
6	19209.1	36.15 AV	54	-17.85	-64.03	4.92	-59.11
7	23684.5	46.53 PK	74	-27.47	-53.65	4.92	-48.73
8	23684.5	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38650.67	41.15 PK	74	-32.85	-59.03	4.92	-54.11
10	38650.67	31.17 AV	54	-22.83	-69.01	4.92	-64.09

Note: Margin value = Emission Level - Limit value

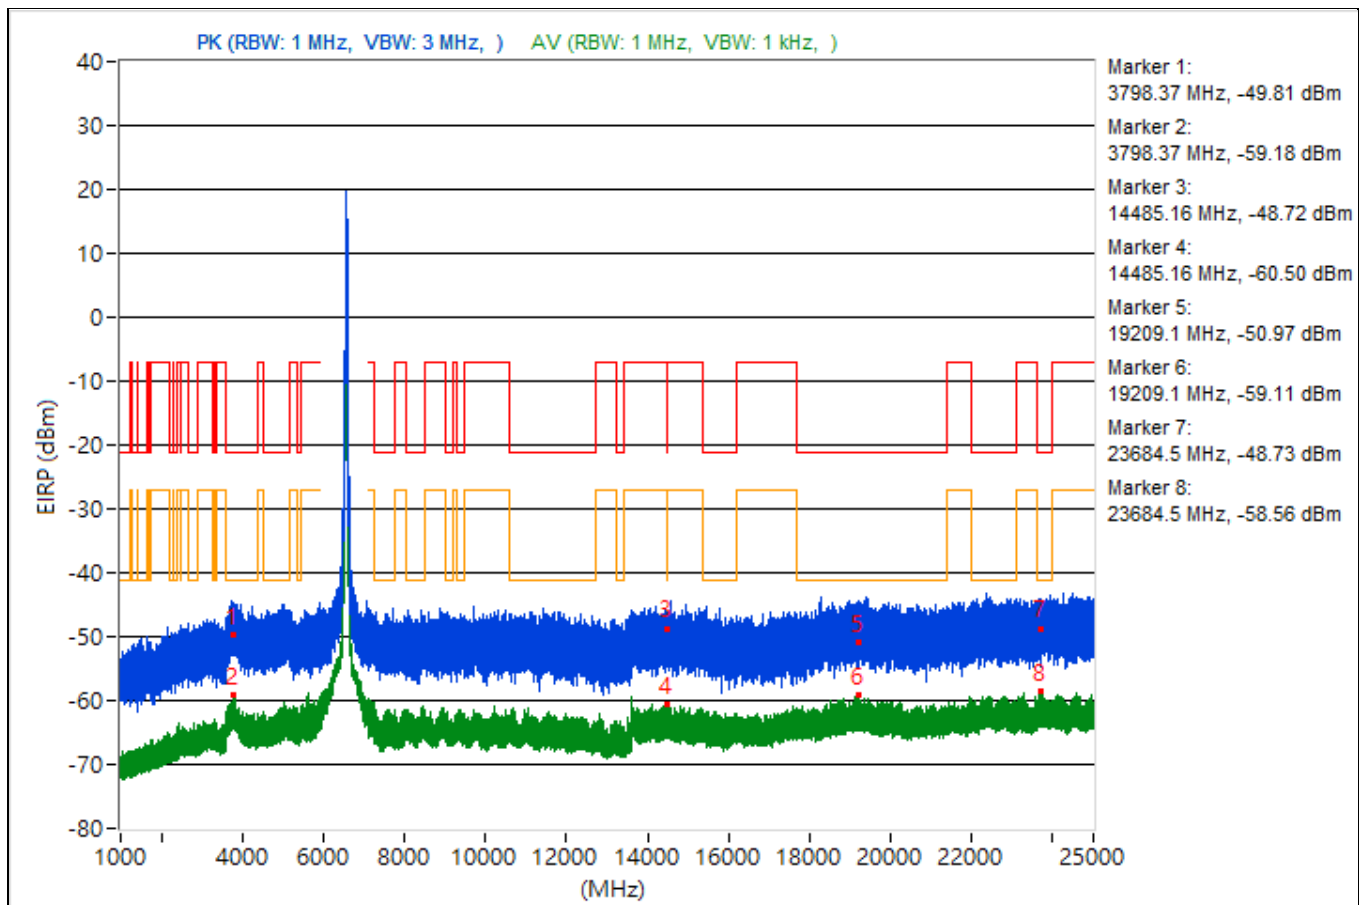


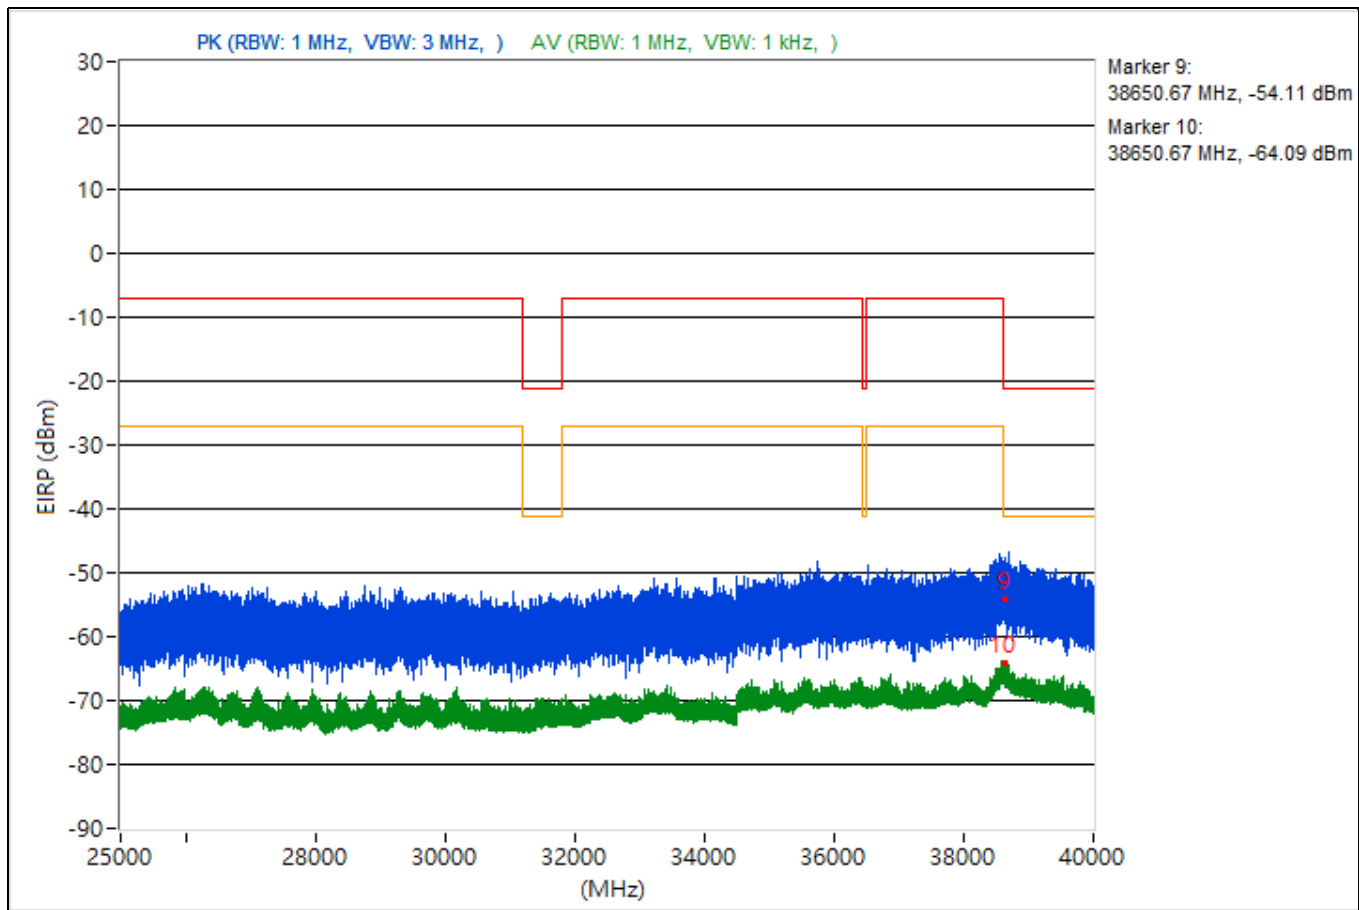


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.27	46.52 PK	74	-27.48	-53.66	4.92	-48.74
2	3782.27	34.92 AV	54	-19.08	-65.26	4.92	-60.34
3	7251.62	45.35 PK	74	-28.65	-54.83	4.92	-49.91
4	7251.62	35.06 AV	54	-18.94	-65.12	4.92	-60.2
5	19173.4	44.86 PK	74	-29.14	-55.32	4.92	-50.4
6	19173.4	36.31 AV	54	-17.69	-63.87	4.92	-58.95
7	23720.3	46.46 PK	74	-27.54	-53.72	4.92	-48.8
8	23720.3	36.46 AV	54	-17.54	-63.72	4.92	-58.8
9	38618.31	43.94 PK	74	-30.06	-56.24	4.92	-51.32
10	38618.31	32.23 AV	54	-21.77	-67.95	4.92	-63.03

Note: Margin value = Emission Level - Limit value

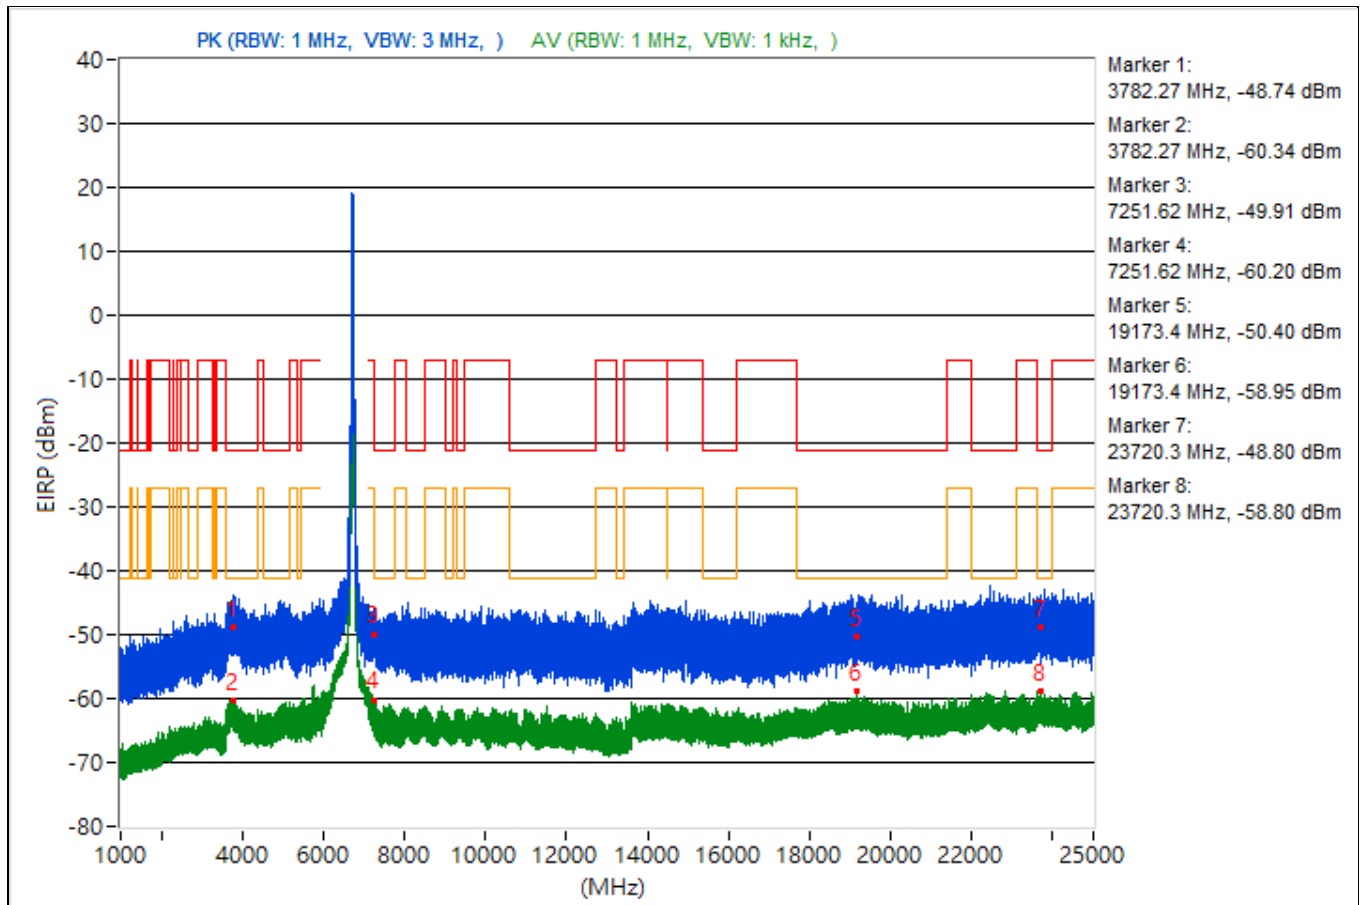


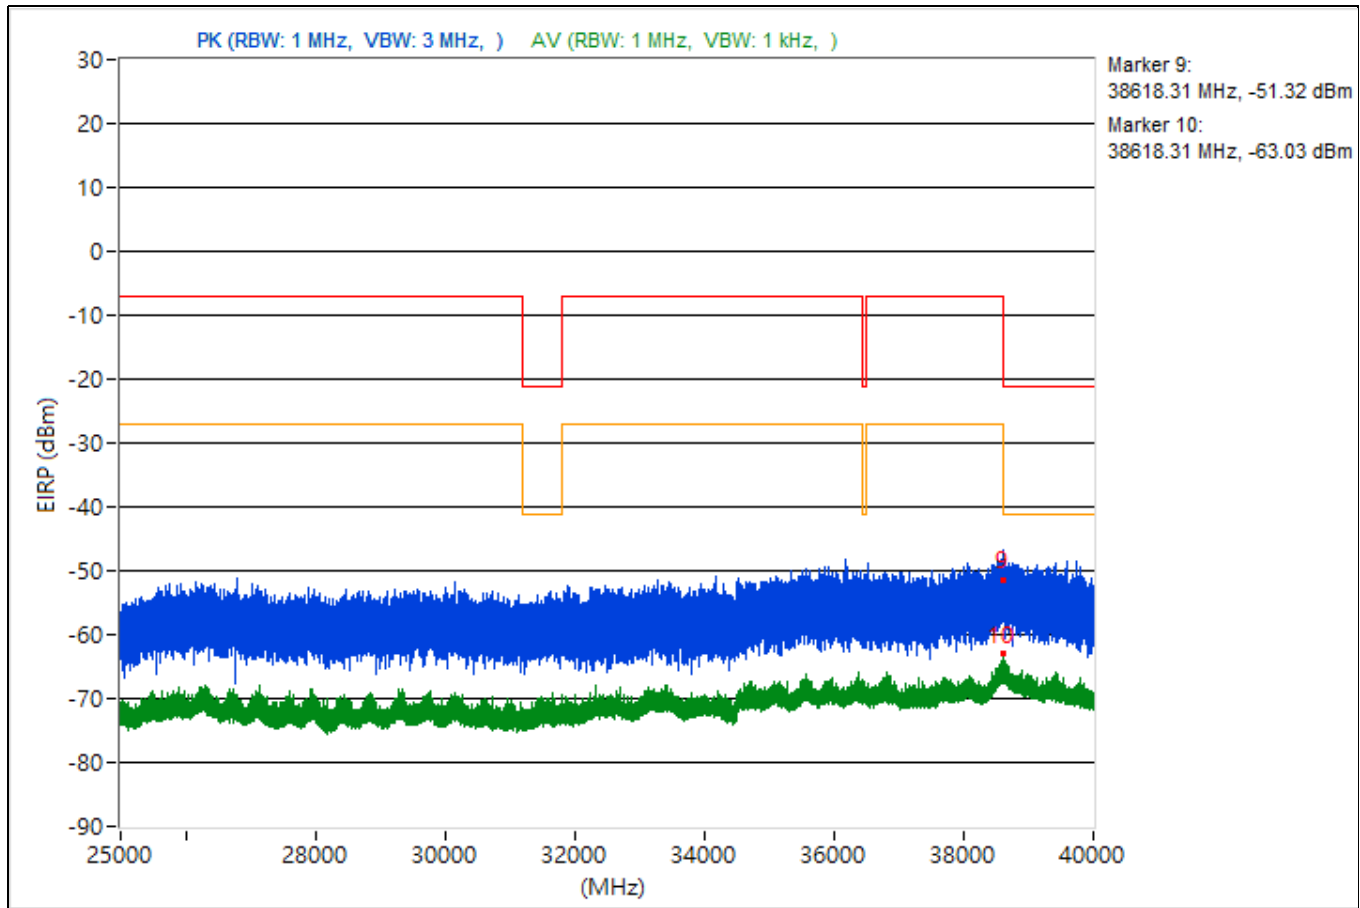


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.29	44.61 PK	74	-29.39	-55.57	4.92	-50.65
2	3742.29	35.24 AV	54	-18.76	-64.94	4.92	-60.02
3	7250.69	44.04 PK	74	-29.96	-56.14	4.92	-51.22
4	7250.69	35.93 AV	54	-18.07	-64.25	4.92	-59.33
5	19099.6	46.45 PK	74	-27.55	-53.73	4.92	-48.81
6	19099.6	35.75 AV	54	-18.25	-64.43	4.92	-59.51
7	23786.5	43.94 PK	74	-30.06	-56.24	4.92	-51.32
8	23786.5	36.61 AV	54	-17.39	-63.57	4.92	-58.65
9	38602.4	43.41 PK	74	-30.59	-56.77	4.92	-51.85
10	38602.4	31.2 AV	54	-22.8	-68.98	4.92	-64.06

Note: Margin value = Emission Level - Limit value

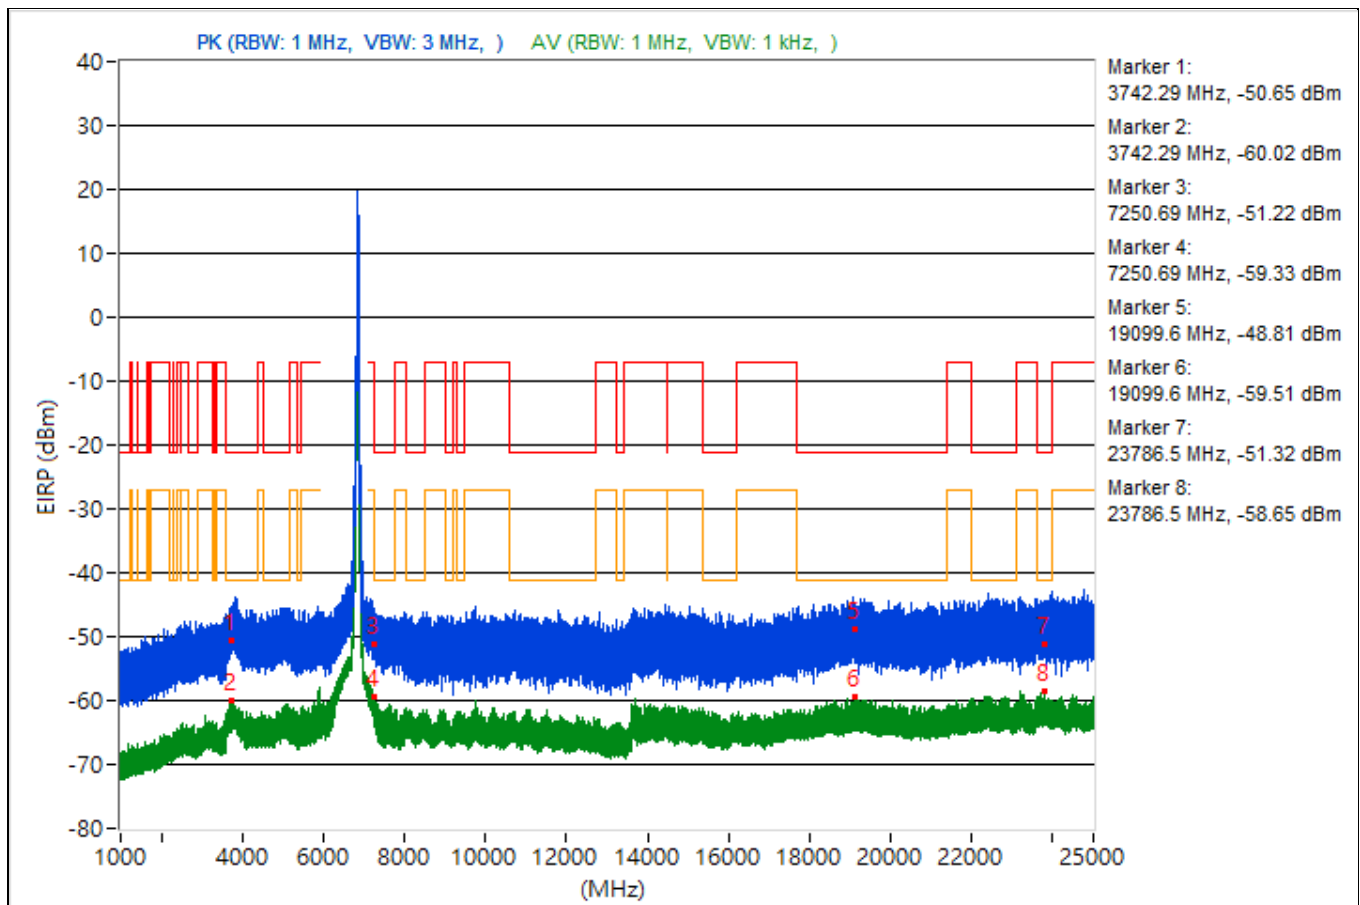

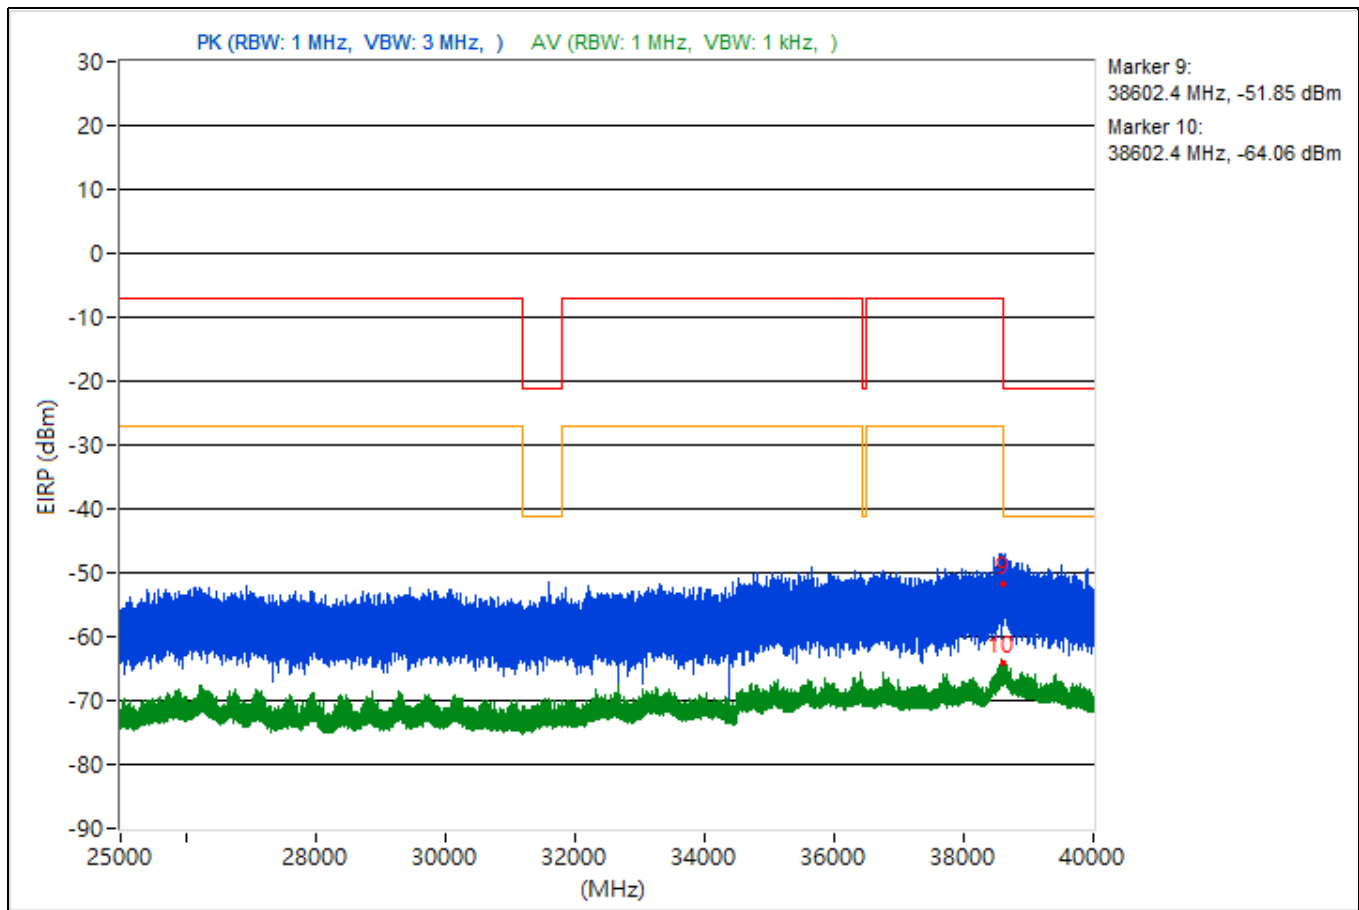



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5873.17	62.18 PK	88.26	-26.08	-38	4.92	-33.08
2	#5873.17	52.73 AV	68.26	-15.53	-47.45	4.92	-42.53
3	14496.53	42.3 PK	74	-31.7	-57.88	4.92	-52.96
4	14496.53	34.43 AV	54	-19.57	-65.75	4.92	-60.83
5	18927.9	46.8 PK	74	-27.2	-53.38	4.92	-48.46
6	18927.9	36.35 AV	54	-17.65	-63.83	4.92	-58.91
7	23674.1	42.42 PK	74	-31.58	-57.76	4.92	-52.84
8	23674.1	37.33 AV	54	-16.67	-62.85	4.92	-57.93
9	38603.64	45.48 PK	74	-28.52	-54.7	4.92	-49.78
10	38603.64	31.62 AV	54	-22.38	-68.56	4.92	-63.64

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

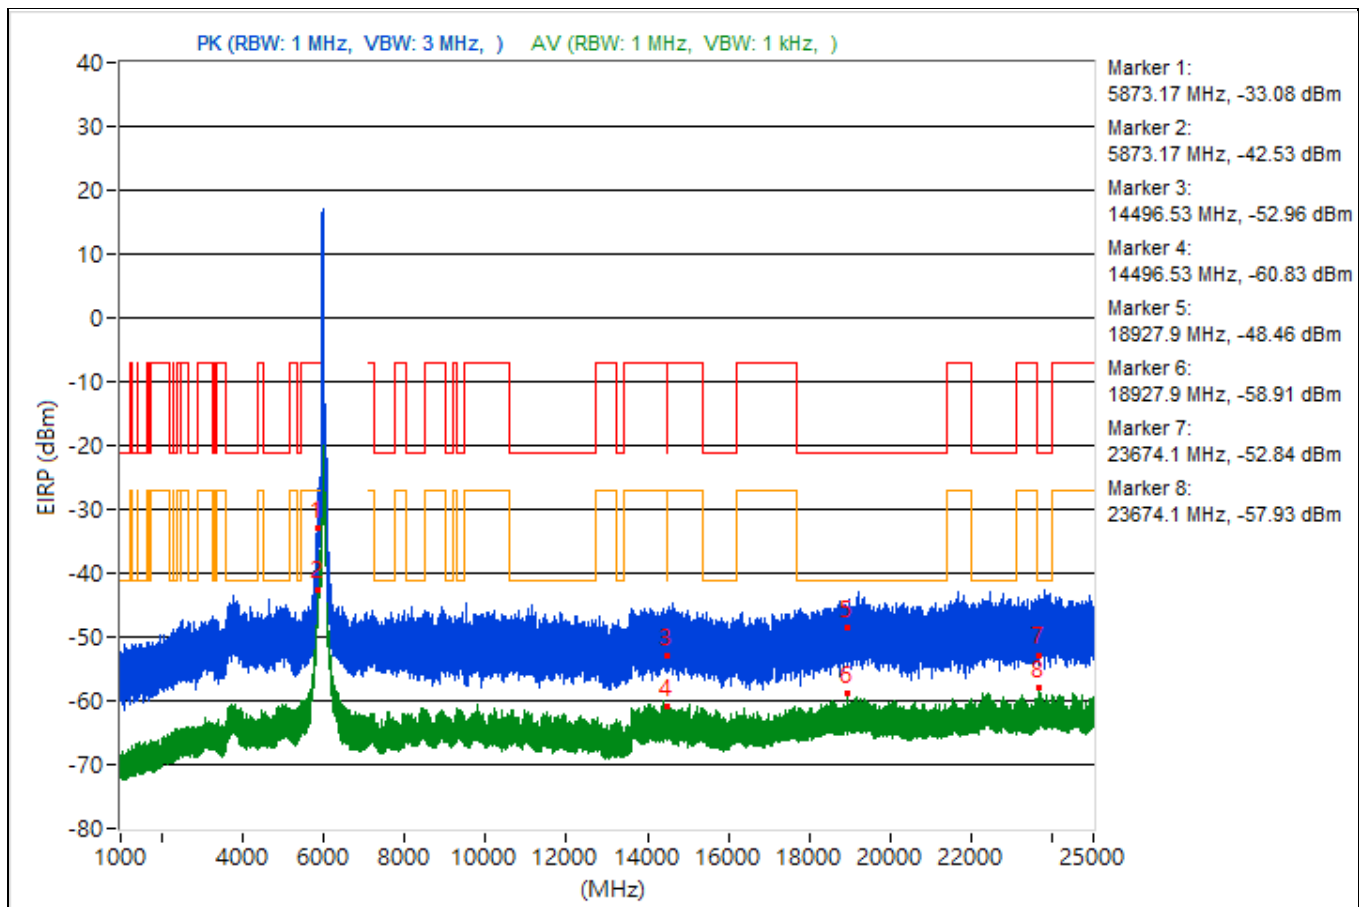


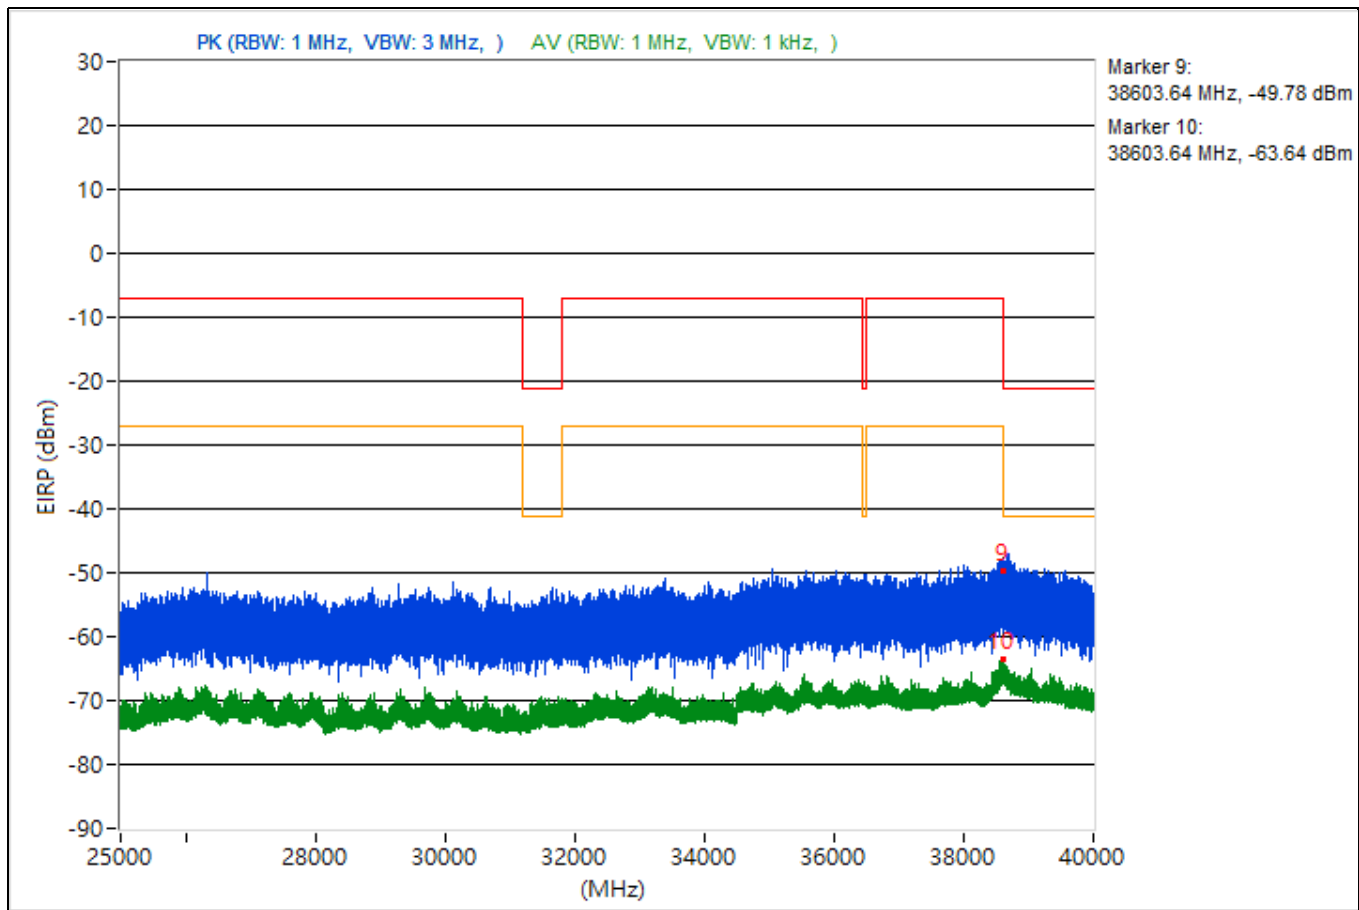


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3721.6	47.41 PK	74	-26.59	-52.77	4.92	-47.85
2	3721.6	35.79 AV	54	-18.21	-64.39	4.92	-59.47
3	8480.53	45.27 PK	74	-28.73	-54.91	4.92	-49.99
4	8480.53	34.72 AV	54	-19.28	-65.46	4.92	-60.54
5	19460.3	46.07 PK	74	-27.93	-54.11	4.92	-49.19
6	19460.3	35.68 AV	54	-18.32	-64.5	4.92	-59.58
7	23609.2	47.16 PK	74	-26.84	-53.02	4.92	-48.1
8	23609.2	36.39 AV	54	-17.61	-63.79	4.92	-58.87
9	38617.33	44.45 PK	74	-29.55	-55.73	4.92	-50.81
10	38617.33	31.9 AV	54	-22.1	-68.28	4.92	-63.36

Note: Margin value = Emission Level - Limit value

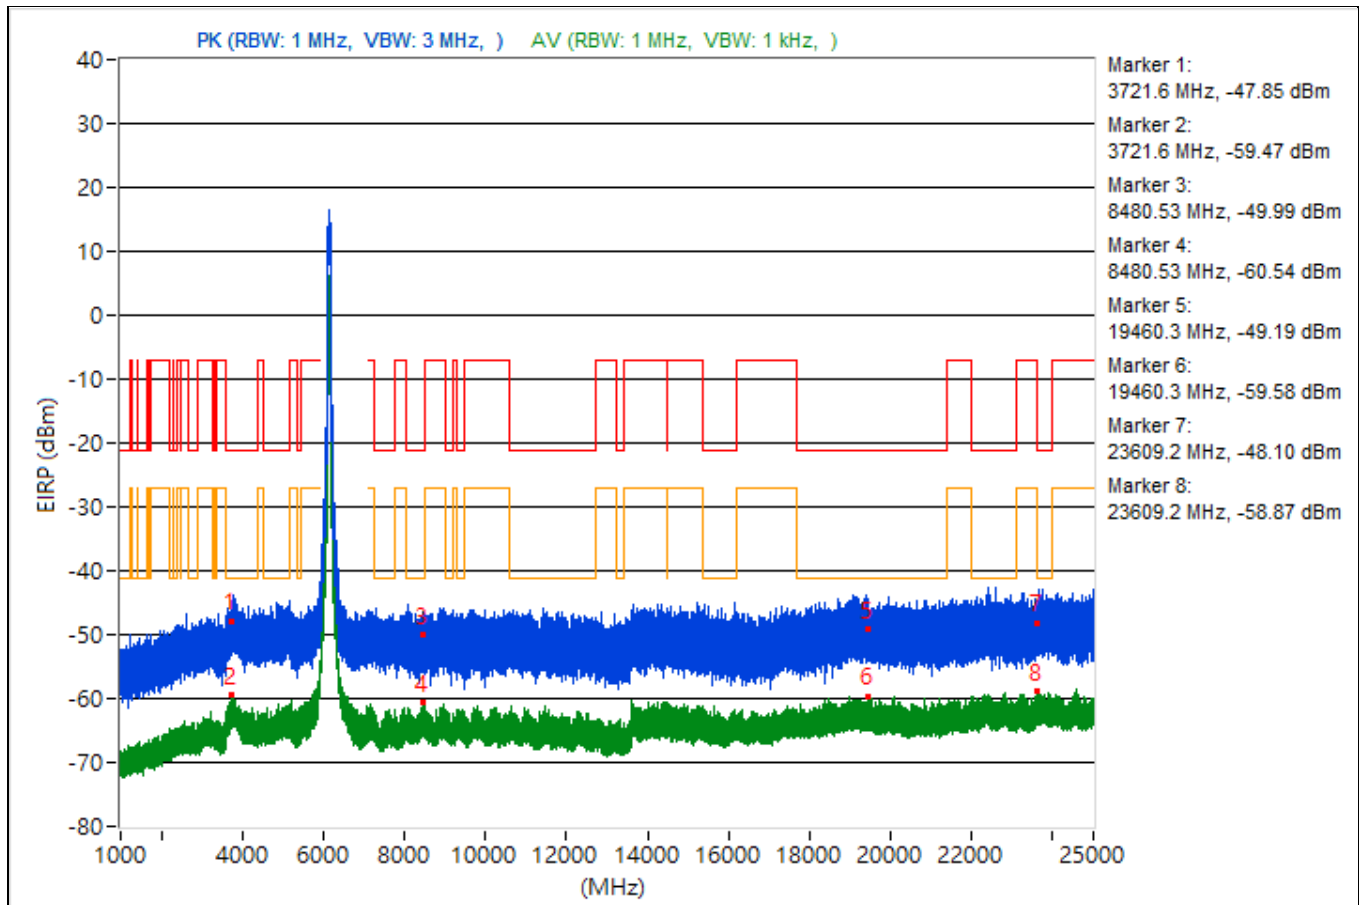


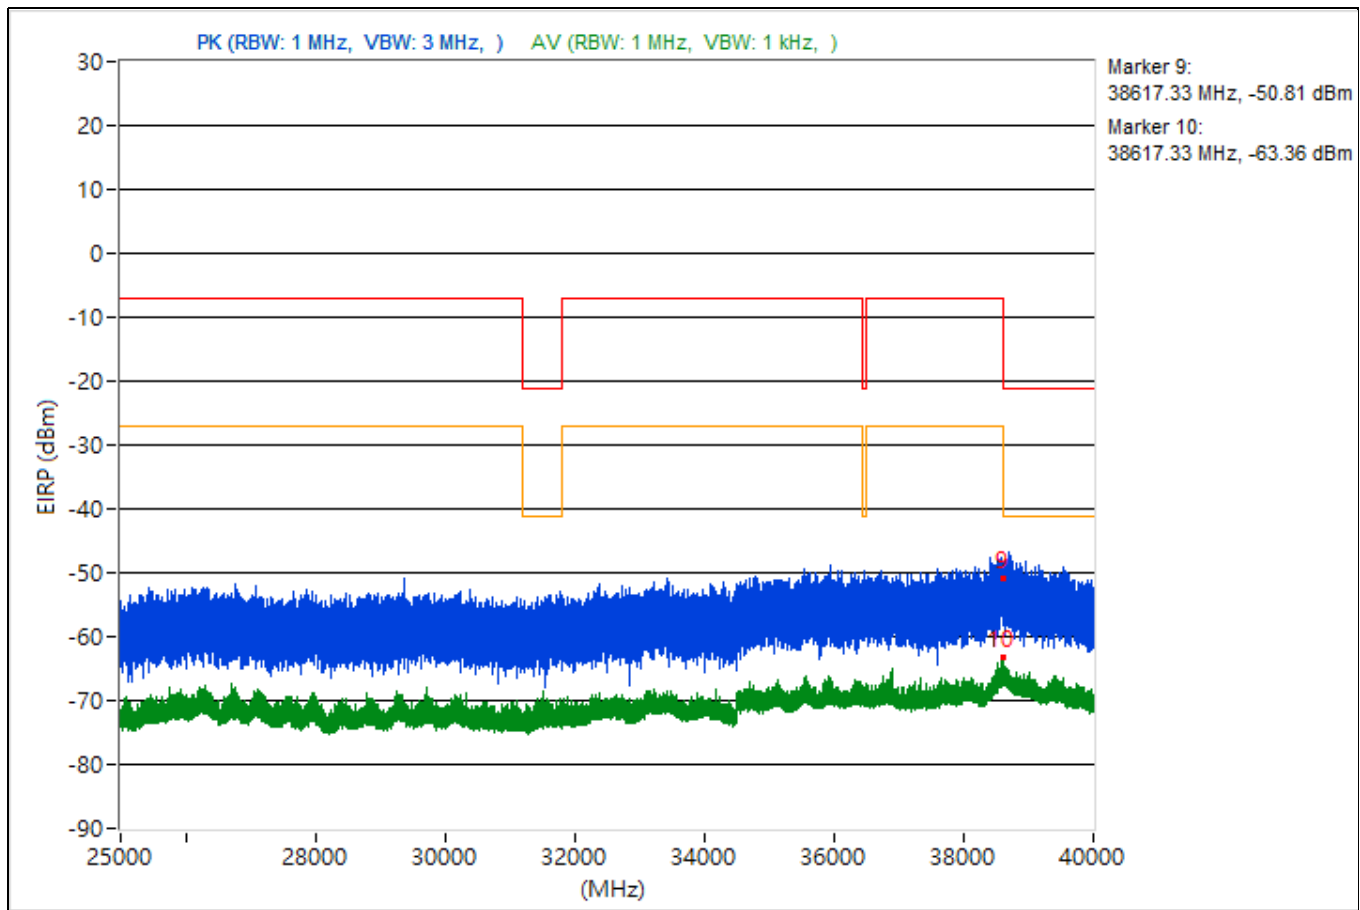


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.47	45.72 PK	74	-28.28	-54.46	4.92	-49.54
2	5459.47	35.26 AV	54	-18.74	-64.92	4.92	-60
3	8450.84	42.83 PK	74	-31.17	-57.35	4.92	-52.43
4	8450.84	34.42 AV	54	-19.58	-65.76	4.92	-60.84
5	18998.8	44.97 PK	74	-29.03	-55.21	4.92	-50.29
6	18998.8	35.58 AV	54	-18.42	-64.6	4.92	-59.68
7	23673.9	46.81 PK	74	-27.19	-53.37	4.92	-48.45
8	23673.9	36.55 AV	54	-17.45	-63.63	4.92	-58.71
9	38604.98	41.73 PK	74	-32.27	-58.45	4.92	-53.53
10	38604.98	31.21 AV	54	-22.79	-68.97	4.92	-64.05

Note: Margin value = Emission Level - Limit value

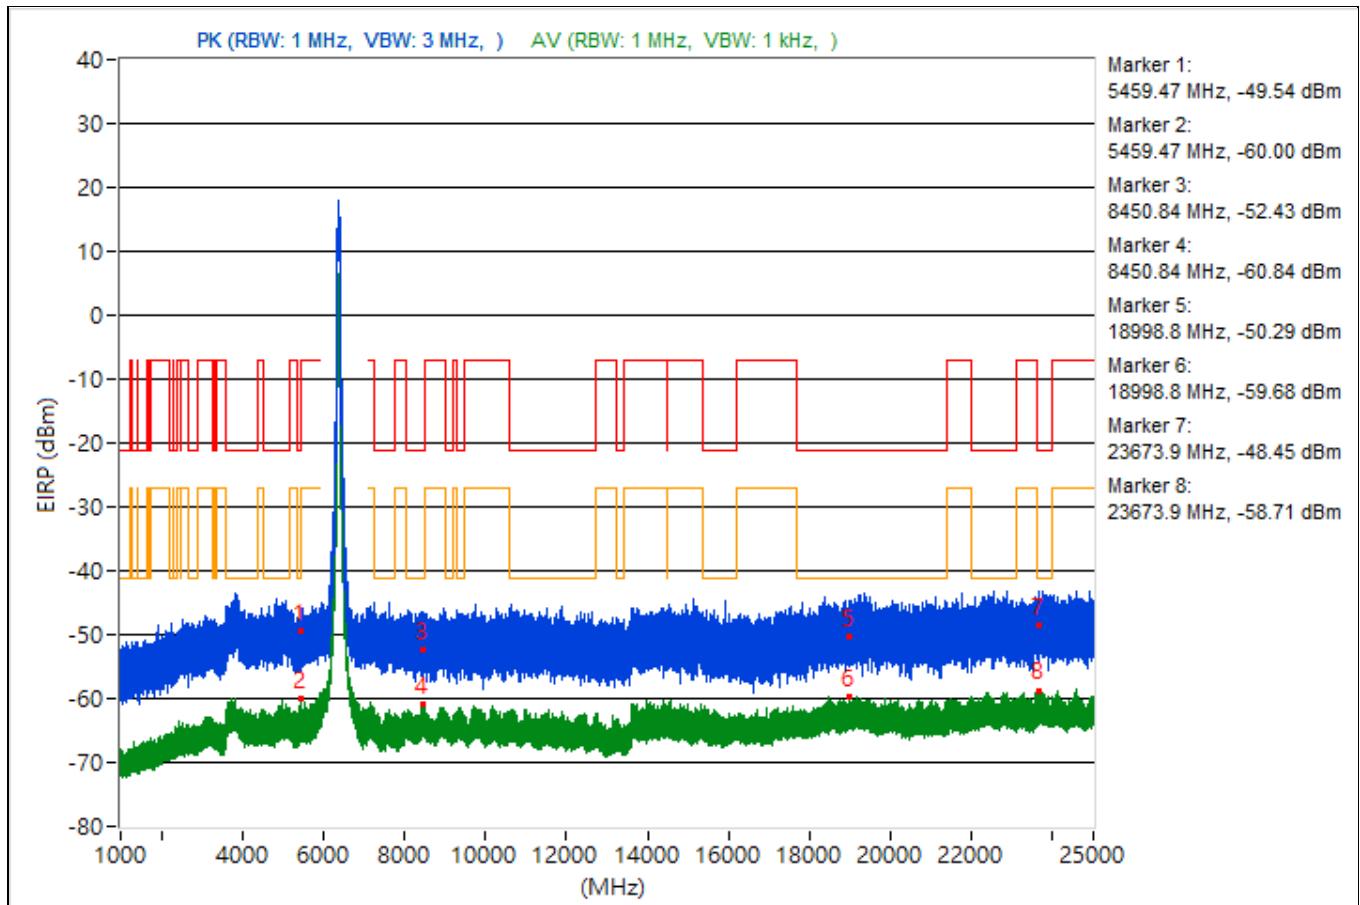


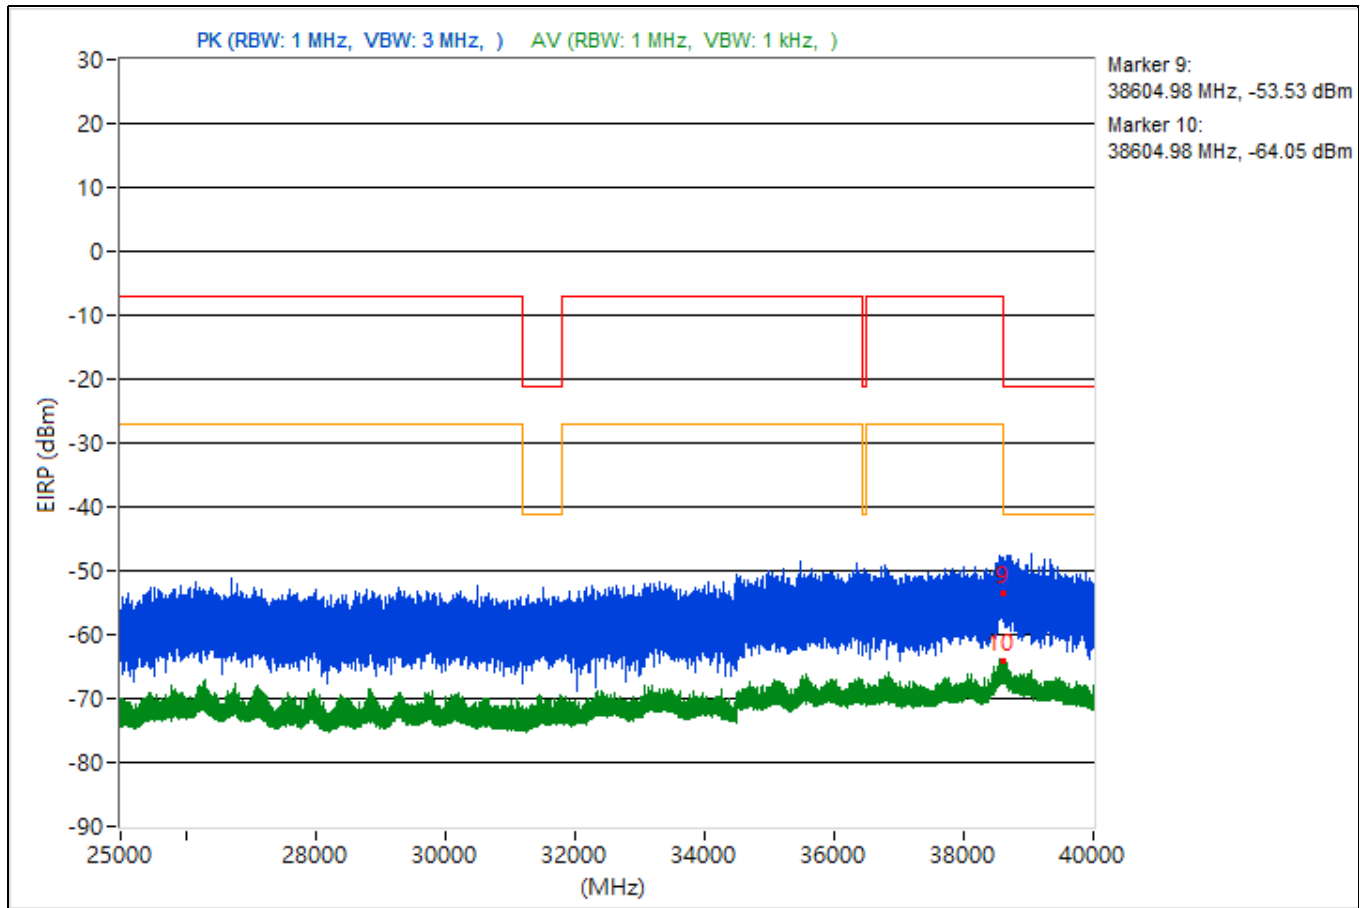


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3743.61	47.98 PK	74	-26.02	-52.2	4.92	-47.28
2	3743.61	35.03 AV	54	-18.97	-65.15	4.92	-60.23
3	14484.09	46.04 PK	74	-27.96	-54.14	4.92	-49.22
4	14484.09	34.6 AV	54	-19.4	-65.58	4.92	-60.66
5	19509.3	44.81 PK	74	-29.19	-55.37	4.92	-50.45
6	19509.3	35.9 AV	54	-18.1	-64.28	4.92	-59.36
7	22369	47.01 PK	74	-26.99	-53.17	4.92	-48.25
8	22369	35.96 AV	54	-18.04	-64.22	4.92	-59.3
9	38612.71	42.65 PK	74	-31.35	-57.53	4.92	-52.61
10	38612.71	31.35 AV	54	-22.65	-68.83	4.92	-63.91

Note: Margin value = Emission Level - Limit value

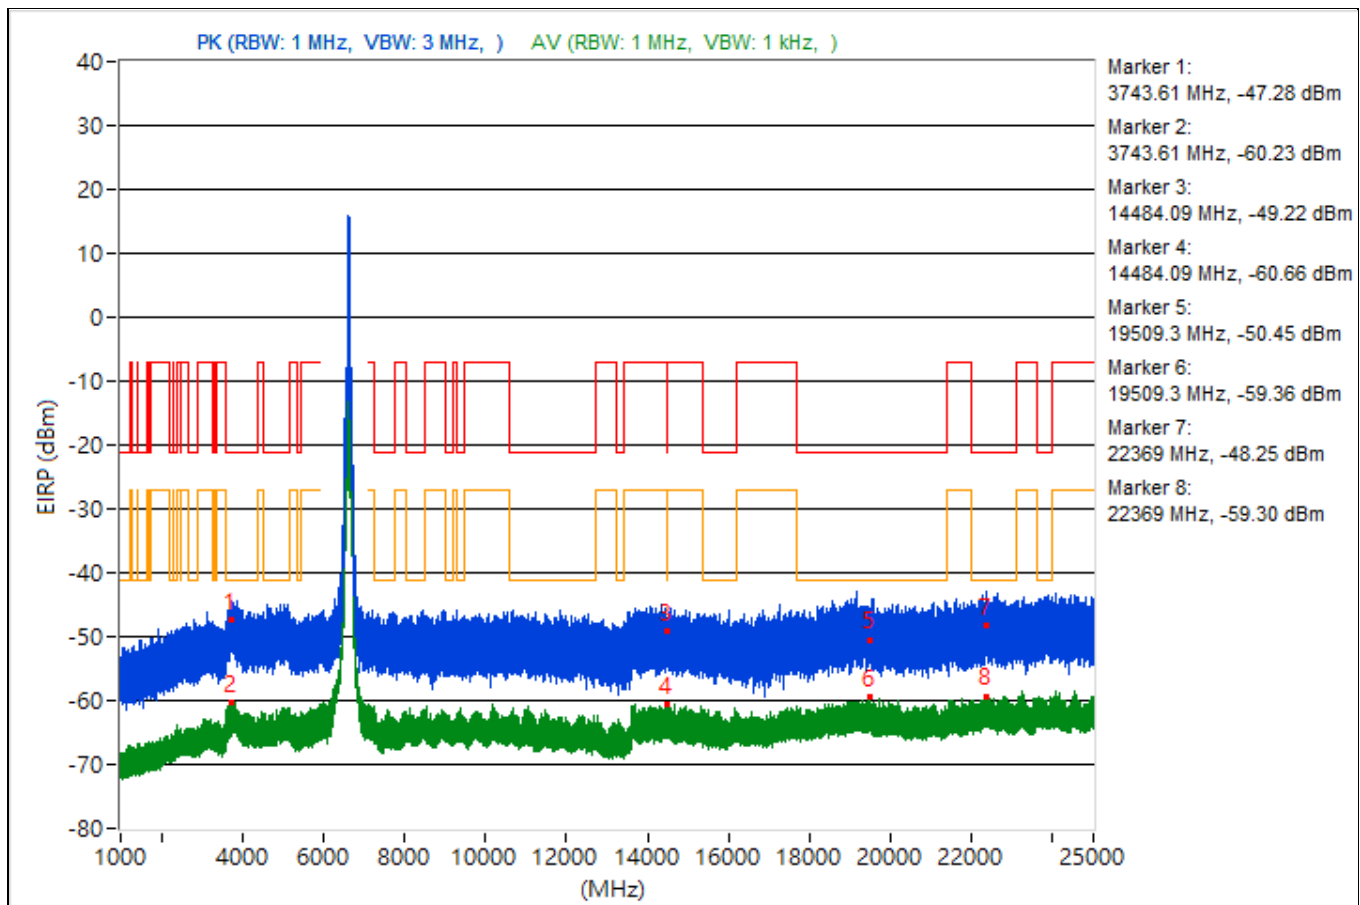


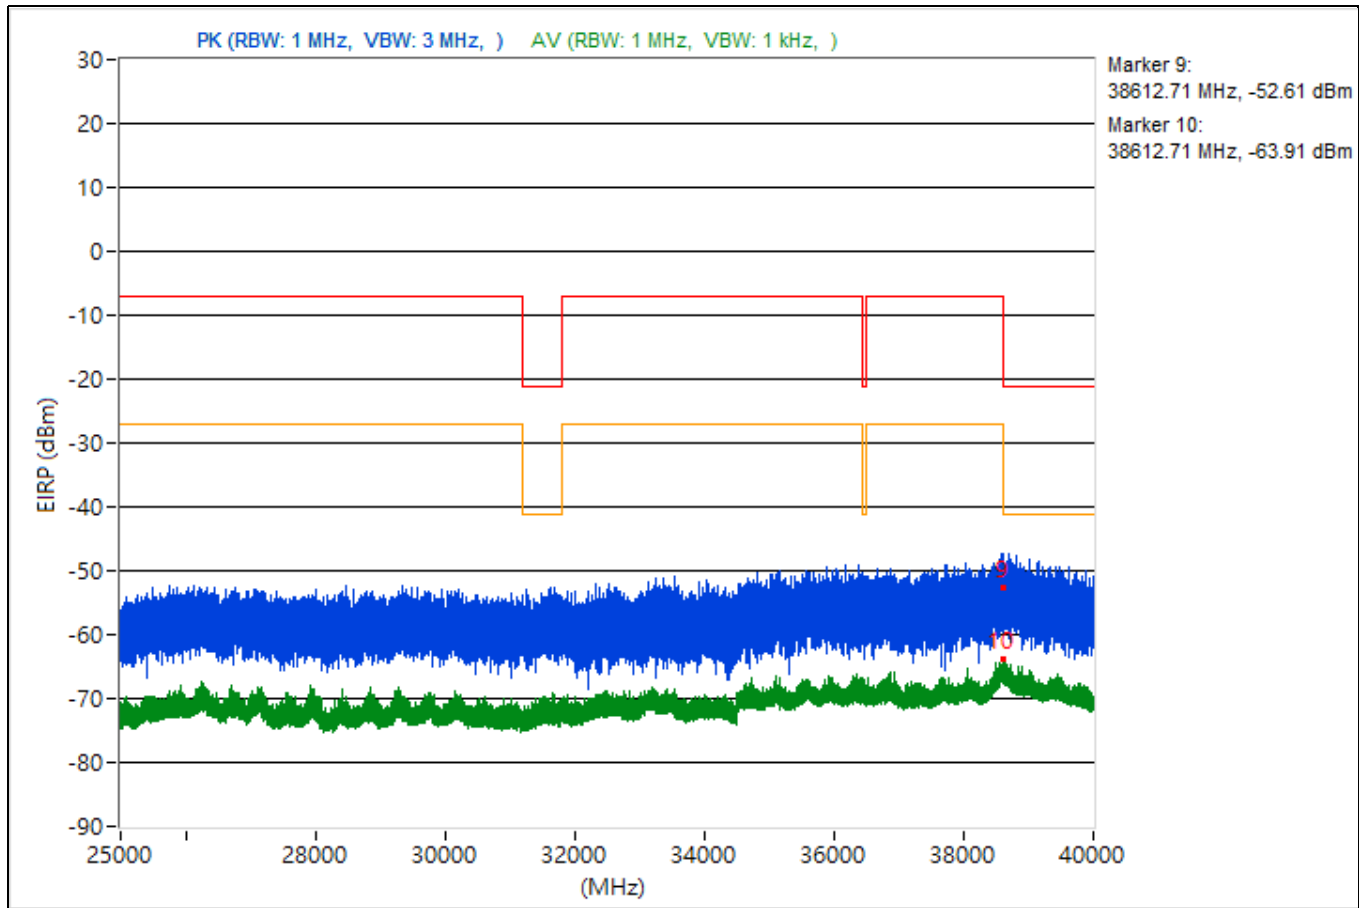


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3666.84	47.13 PK	74	-26.87	-53.05	4.92	-48.13
2	3666.84	35.08 AV	54	-18.92	-65.1	4.92	-60.18
3	14490.76	44.04 PK	74	-29.96	-56.14	4.92	-51.22
4	14490.76	34.68 AV	54	-19.32	-65.5	4.92	-60.58
5	18889.1	45.35 PK	74	-28.65	-54.83	4.92	-49.91
6	18889.1	36.31 AV	54	-17.69	-63.87	4.92	-58.95
7	23697.8	43.83 PK	74	-30.17	-56.35	4.92	-51.43
8	23697.8	36.55 AV	54	-17.45	-63.63	4.92	-58.71
9	38606.4	41.42 PK	74	-32.58	-58.76	4.92	-53.84
10	38606.4	32.07 AV	54	-21.93	-68.11	4.92	-63.19

Note: Margin value = Emission Level - Limit value

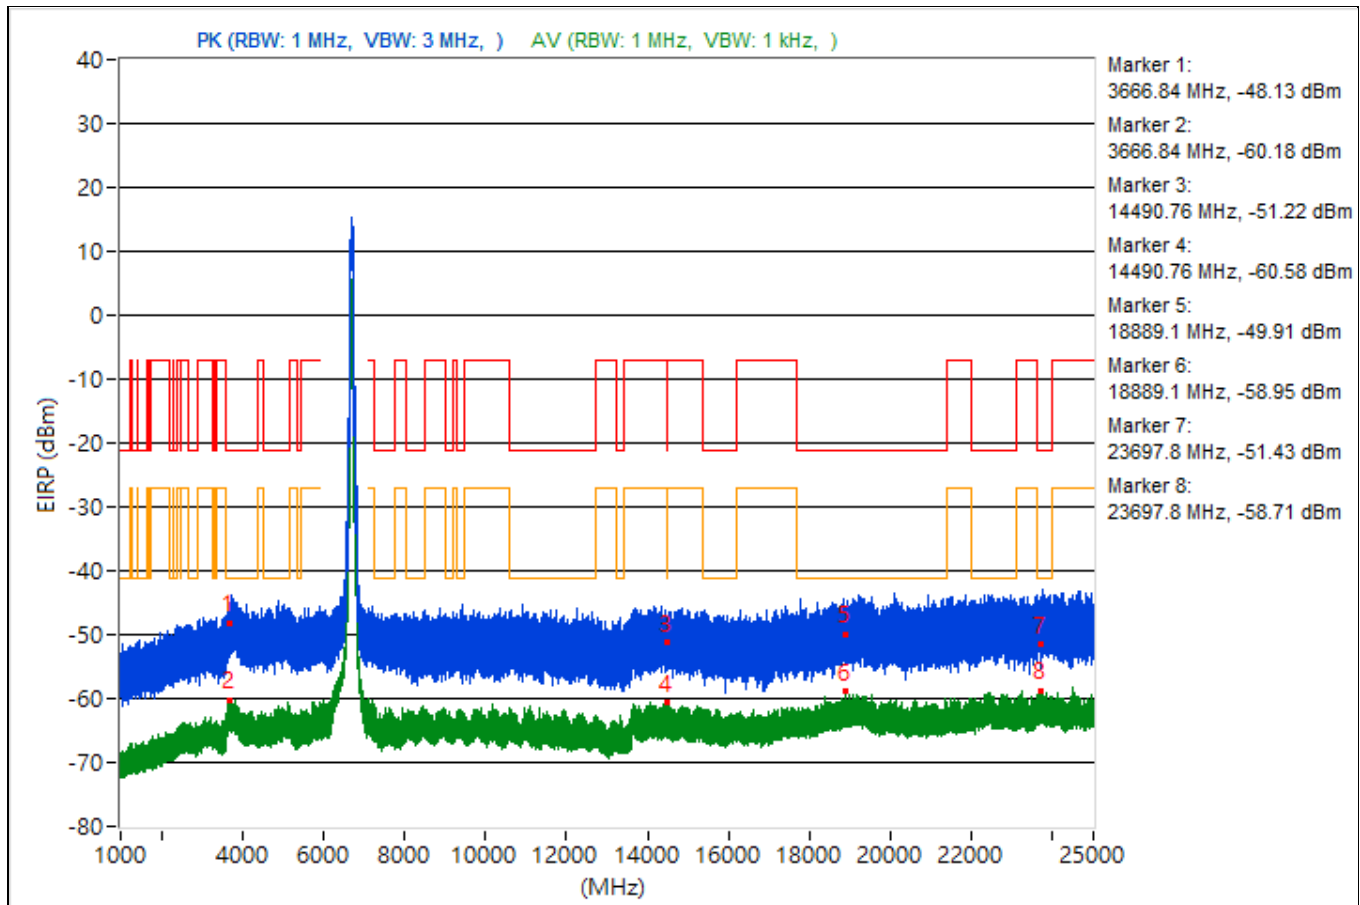


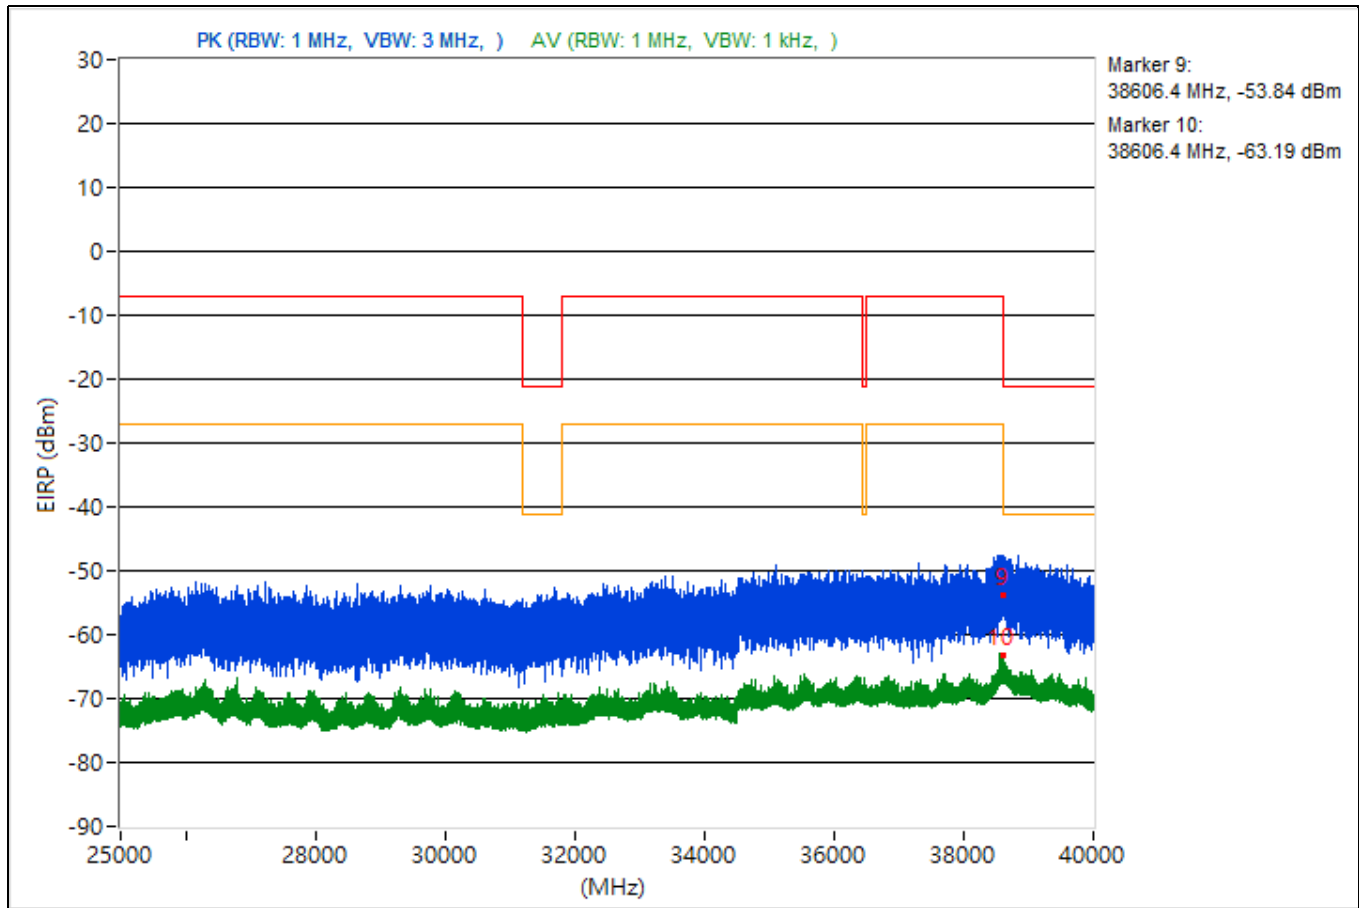


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3747.89	42.93 PK	74	-31.07	-57.25	4.92	-52.33
2	3747.89	35.47 AV	54	-18.53	-64.71	4.92	-59.79
3	14490.22	47.13 PK	74	-26.87	-53.05	4.92	-48.13
4	14490.22	34.71 AV	54	-19.29	-65.47	4.92	-60.55
5	19169.9	47.2 PK	74	-26.8	-52.98	4.92	-48.06
6	19169.9	35.7 AV	54	-18.3	-64.48	4.92	-59.56
7	23684.6	45.2 PK	74	-28.8	-54.98	4.92	-50.06
8	23684.6	36.81 AV	54	-17.19	-63.37	4.92	-58.45
9	38620.44	46.7 PK	74	-27.3	-53.48	4.92	-48.56
10	38620.44	31.45 AV	54	-22.55	-68.73	4.92	-63.81

Note: Margin value = Emission Level - Limit value

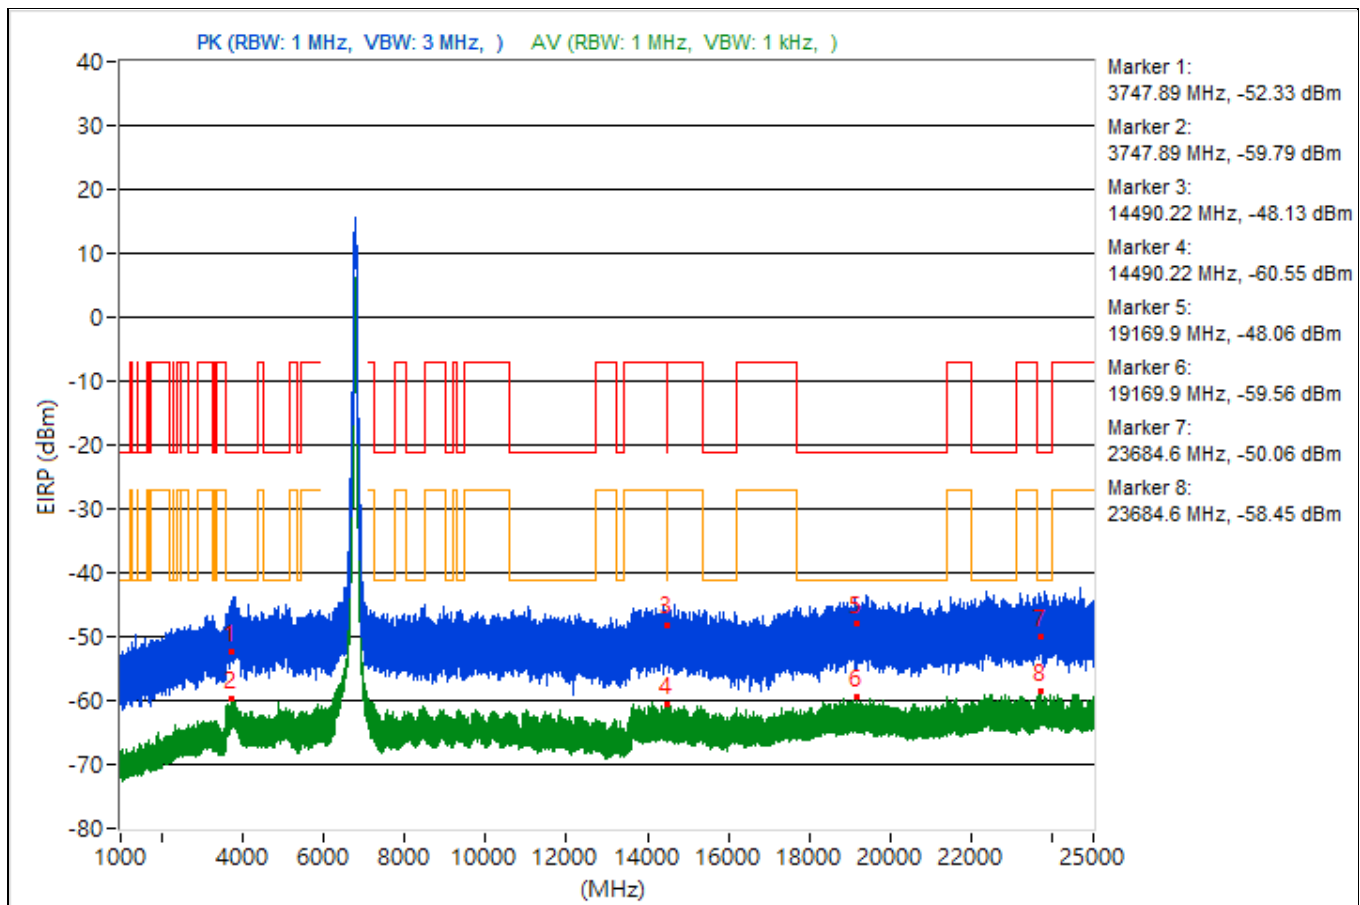

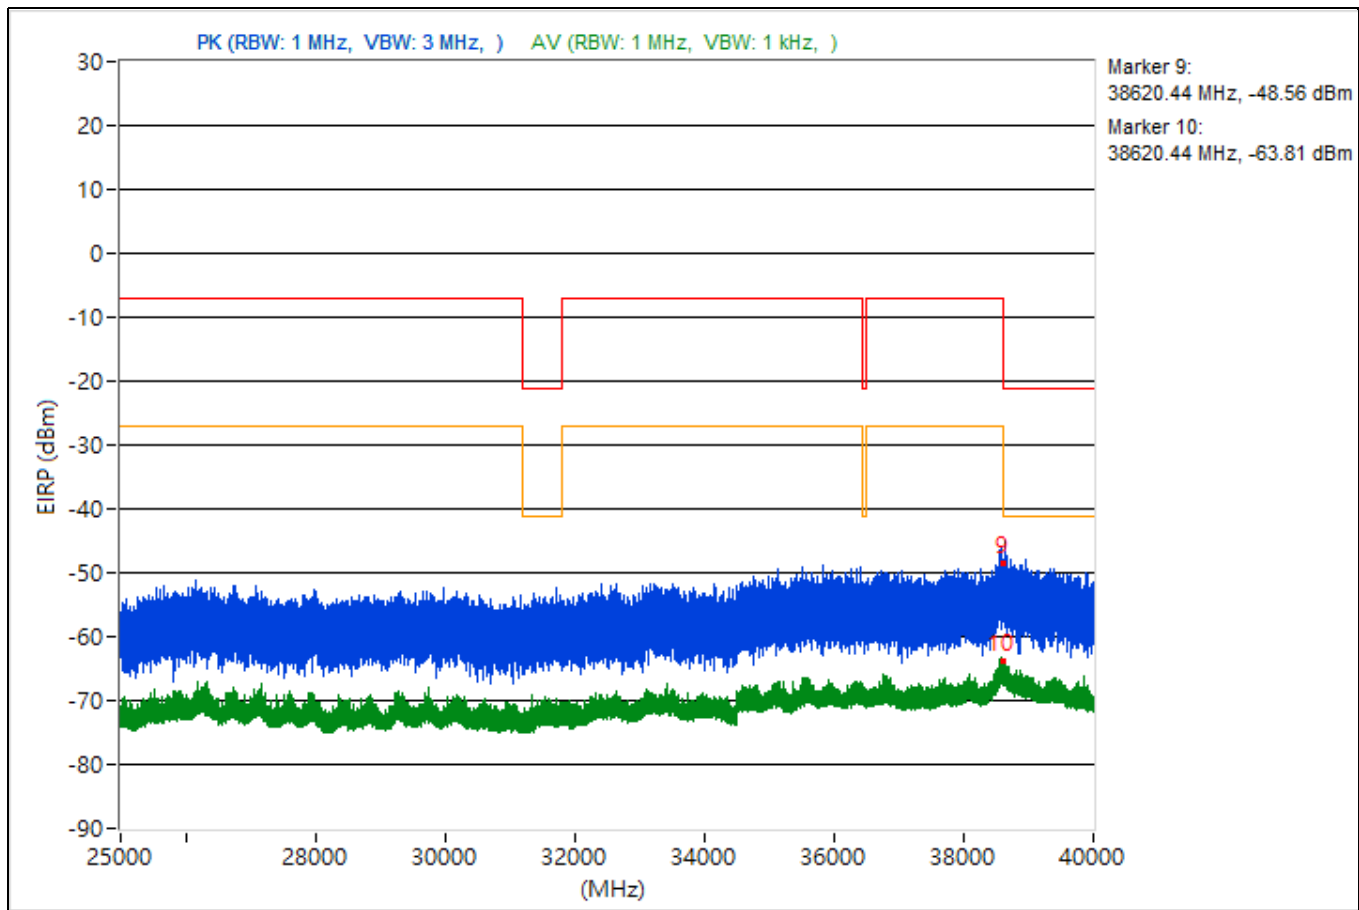



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5872.7	68.53 PK	88.26	-19.73	-31.65	4.92	-26.73
2	#5872.7	61.7 AV	68.26	-6.56	-38.48	4.92	-33.56
3	8470.76	42.11 PK	74	-31.89	-58.07	4.92	-53.15
4	8470.76	34.52 AV	54	-19.48	-65.66	4.92	-60.74
5	19372.7	43 PK	74	-31	-57.18	4.92	-52.26
6	19372.7	35.55 AV	54	-18.45	-64.63	4.92	-59.71
7	23761.3	48.38 PK	74	-25.62	-51.8	4.92	-46.88
8	23761.3	36.61 AV	54	-17.39	-63.57	4.92	-58.65
9	38614.84	42.92 PK	74	-31.08	-57.26	4.92	-52.34
10	38614.84	31.08 AV	54	-22.92	-69.1	4.92	-64.18

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

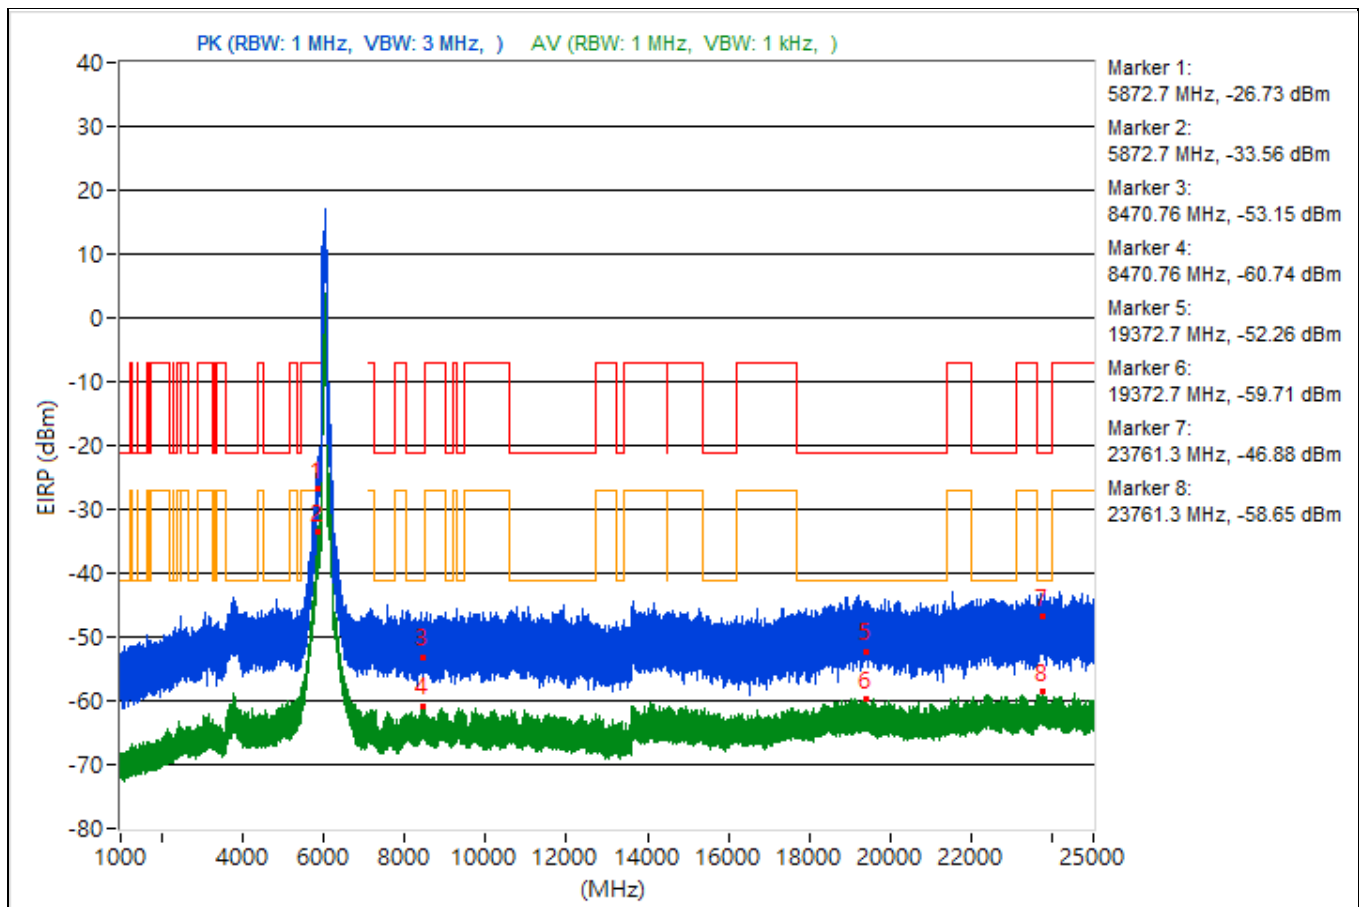


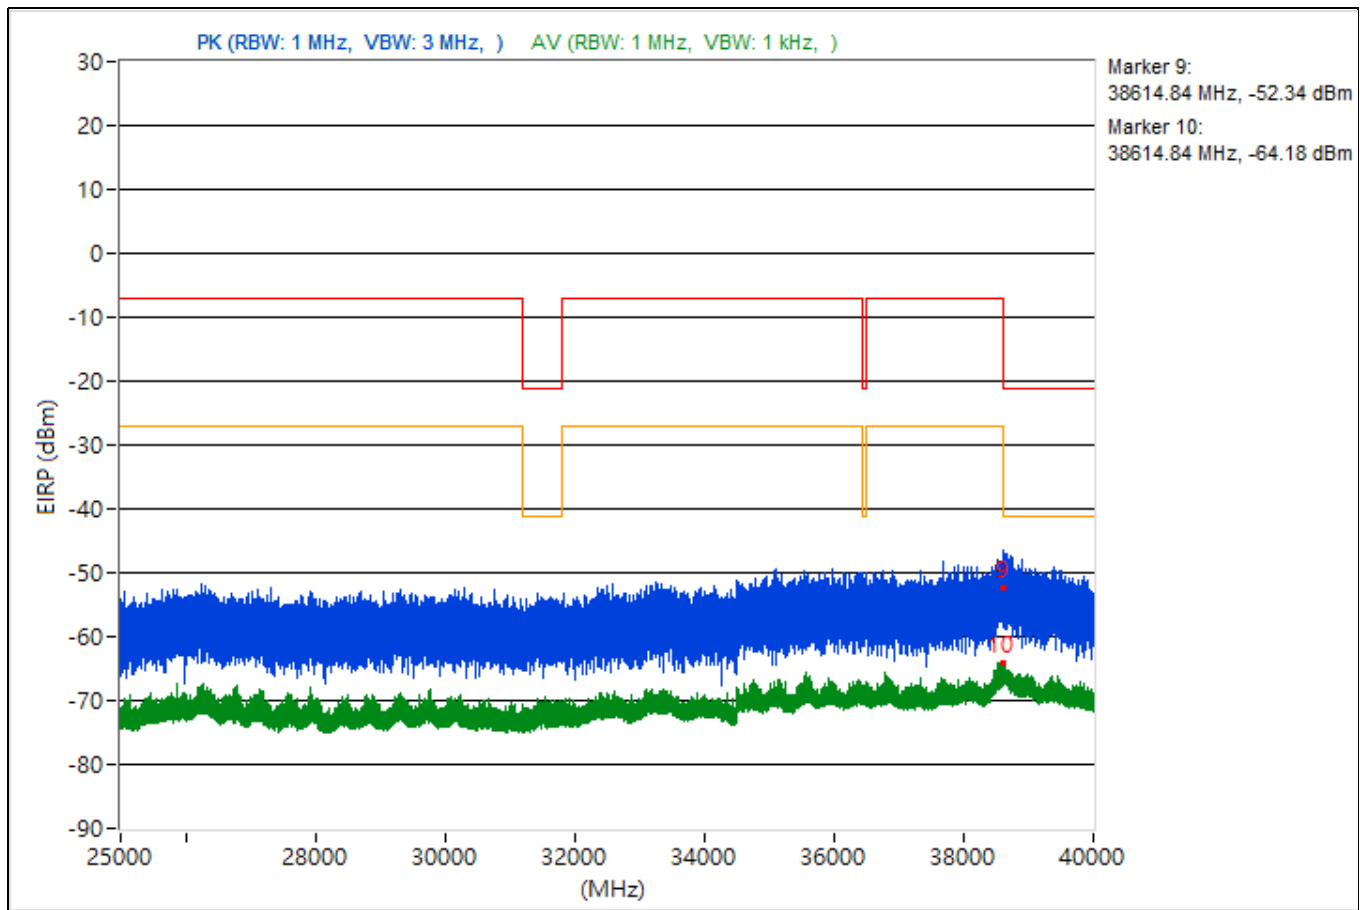


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.07	46.57 PK	74	-27.43	-53.61	4.92	-48.69
2	3813.07	35.82 AV	54	-18.18	-64.36	4.92	-59.44
3	9334.67	43.74 PK	74	-30.26	-56.44	4.92	-51.52
4	9334.67	34.38 AV	54	-19.62	-65.8	4.92	-60.88
5	19109.9	45.63 PK	74	-28.37	-54.55	4.92	-49.63
6	19109.9	36.03 AV	54	-17.97	-64.15	4.92	-59.23
7	23678.8	44.83 PK	74	-29.17	-55.35	4.92	-50.43
8	23678.8	37.48 AV	54	-16.52	-62.7	4.92	-57.78
9	38616.89	42.1 PK	74	-31.9	-58.08	4.92	-53.16
10	38616.89	30.98 AV	54	-23.02	-69.2	4.92	-64.28

Note: Margin value = Emission Level - Limit value

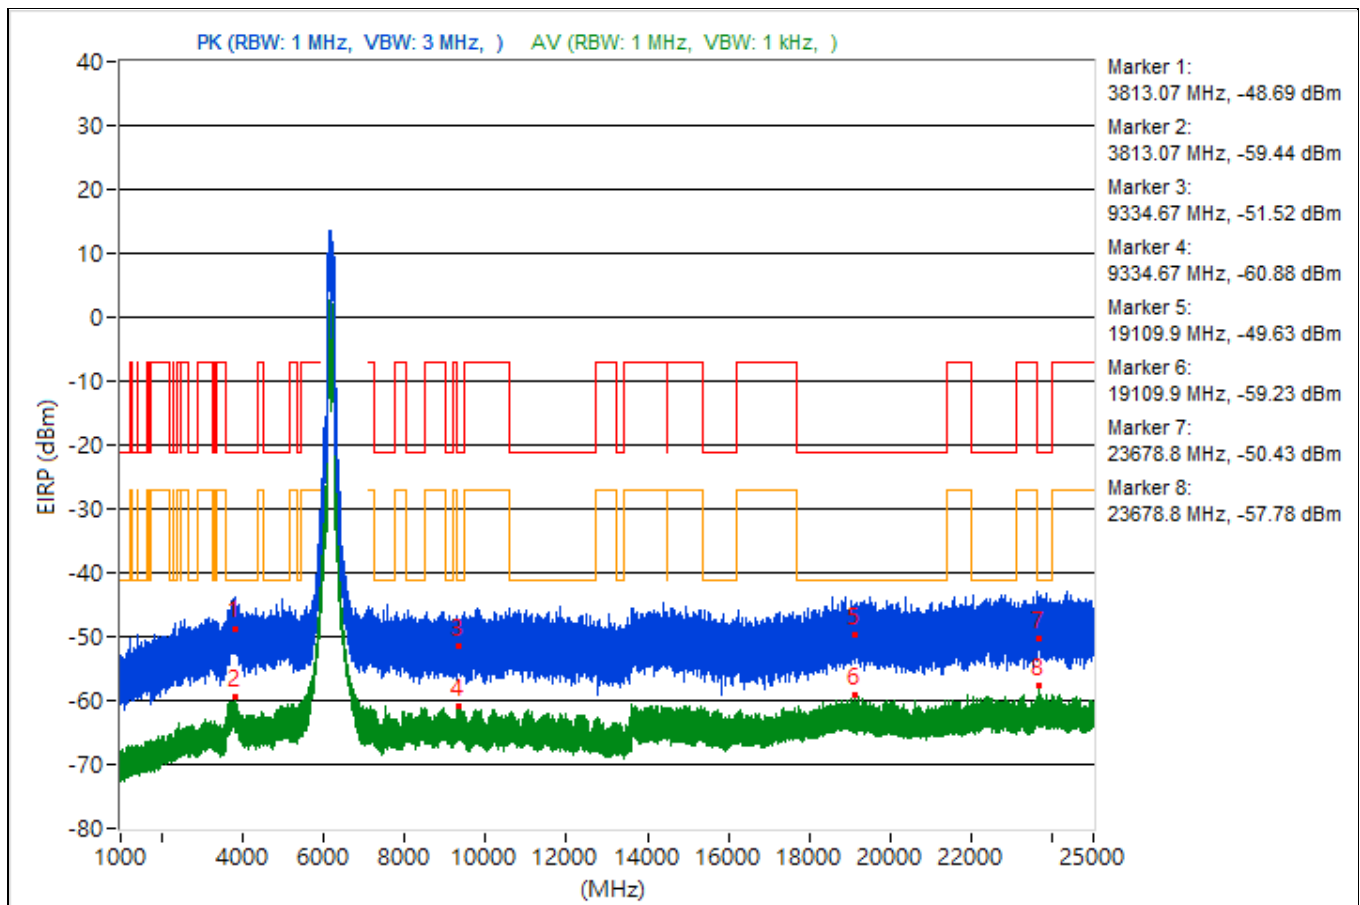


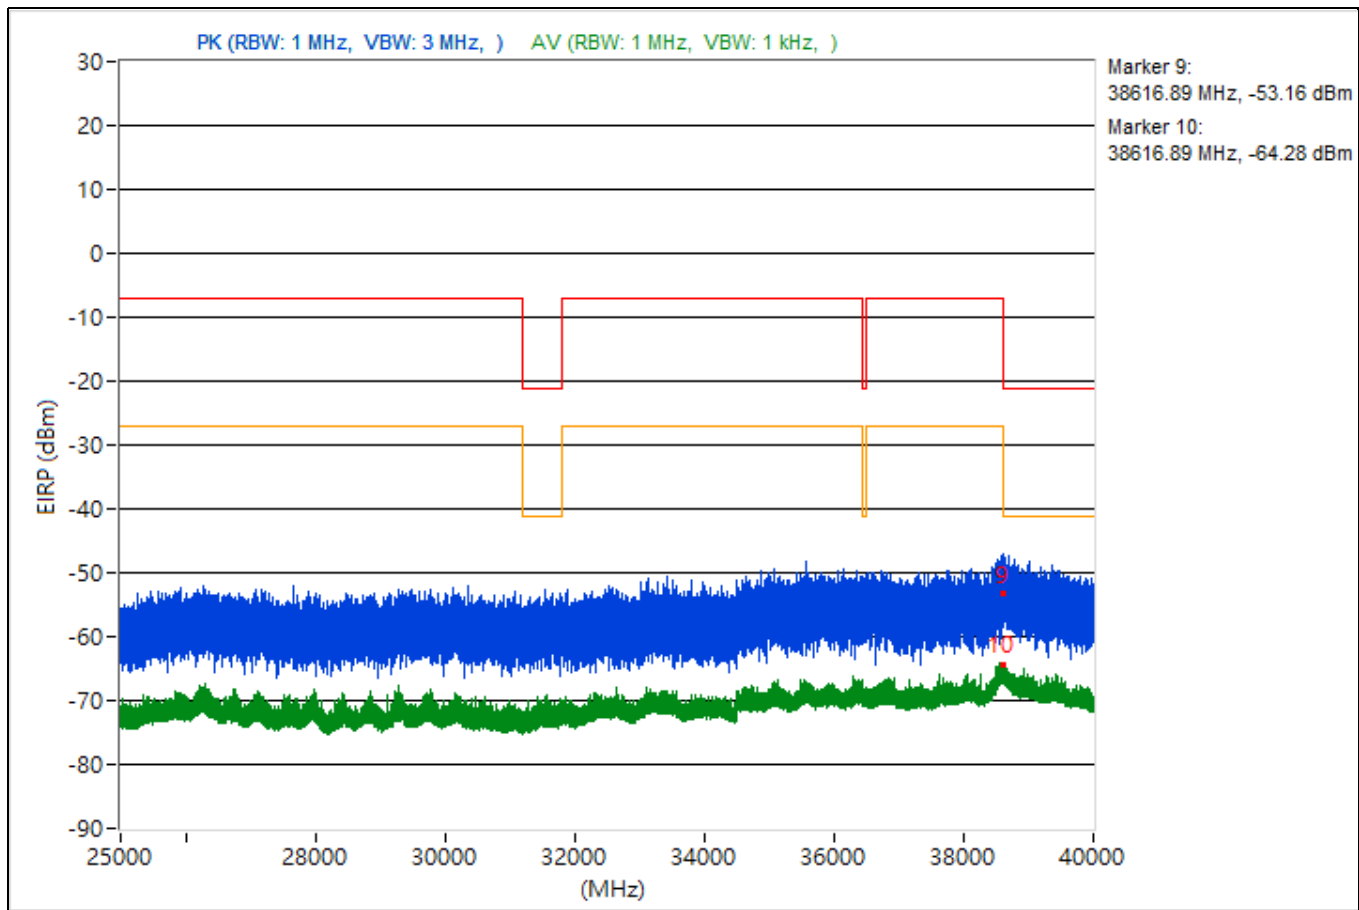


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.19	47.81 PK	74	-26.19	-52.37	4.92	-47.45
2	3775.19	35.56 AV	54	-18.44	-64.62	4.92	-59.7
3	10982.22	46.01 PK	74	-27.99	-54.17	4.92	-49.25
4	10982.22	34.6 AV	54	-19.4	-65.58	4.92	-60.66
5	19175.5	47.9 PK	74	-26.1	-52.28	4.92	-47.36
6	19175.5	35.93 AV	54	-18.07	-64.25	4.92	-59.33
7	22559.1	44.41 PK	74	-29.59	-55.77	4.92	-50.85
8	22559.1	36.61 AV	54	-17.39	-63.57	4.92	-58.65
9	38635.56	44.82 PK	74	-29.18	-55.36	4.92	-50.44
10	38635.56	31.63 AV	54	-22.37	-68.55	4.92	-63.63

Note: Margin value = Emission Level - Limit value

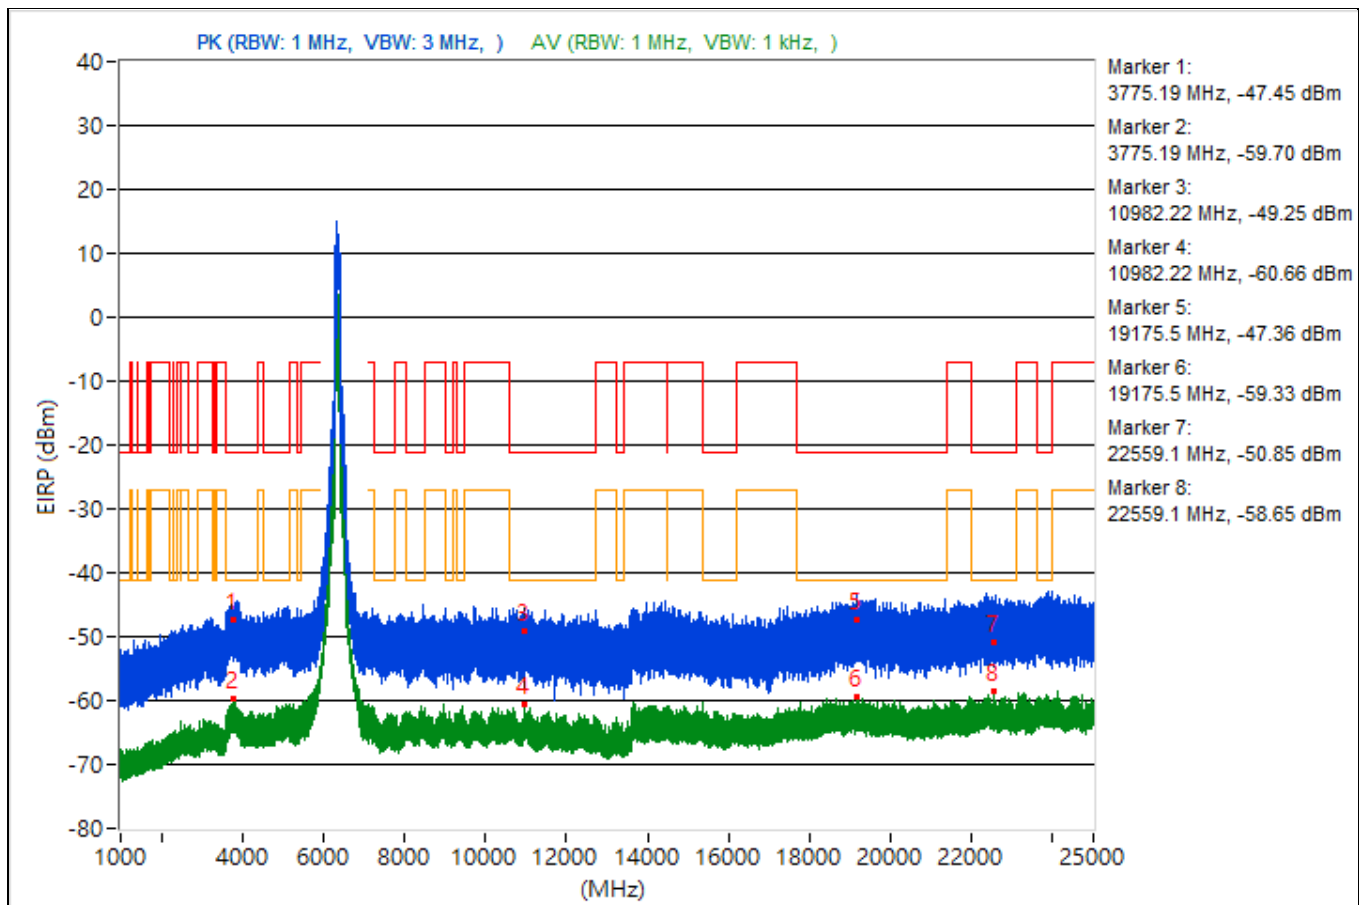


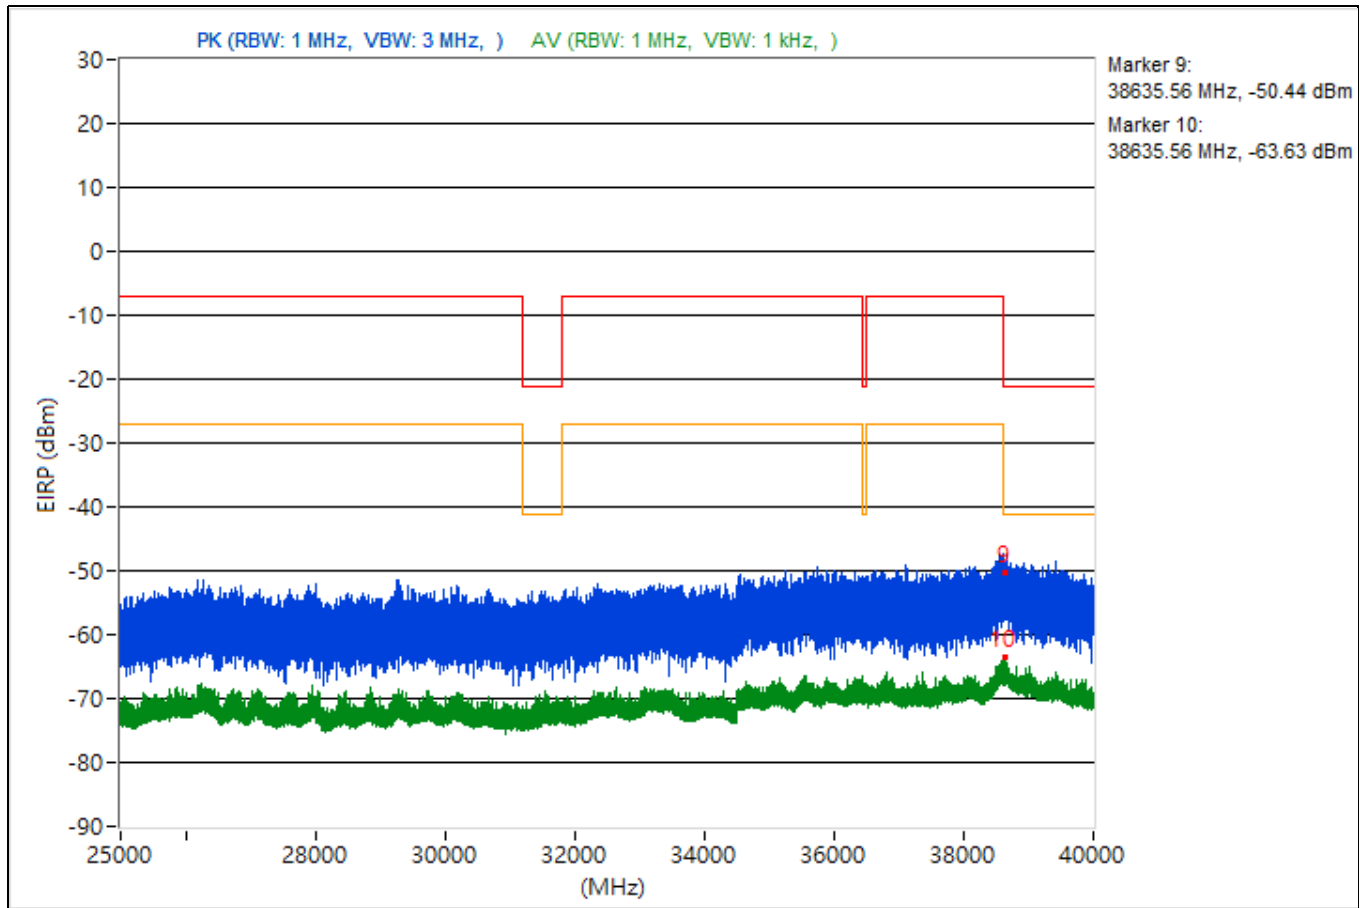


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.19	47.29 PK	74	-26.71	-52.89	4.92	-47.97
2	3768.19	34.94 AV	54	-19.06	-65.24	4.92	-60.32
3	7294.63	43.01 PK	74	-30.99	-57.17	4.92	-52.25
4	7294.63	34.63 AV	54	-19.37	-65.55	4.92	-60.63
5	19431.3	44.26 PK	74	-29.74	-55.92	4.92	-51.00
6	19431.3	35.79 AV	54	-18.21	-64.39	4.92	-59.47
7	23709.7	47.61 PK	74	-26.39	-52.57	4.92	-47.65
8	23709.7	36.59 AV	54	-17.41	-63.59	4.92	-58.67
9	38649.96	46.94 PK	74	-27.06	-53.24	4.92	-48.32
10	38649.96	31.49 AV	54	-22.51	-68.69	4.92	-63.77

Note: Margin value = Emission Level - Limit value

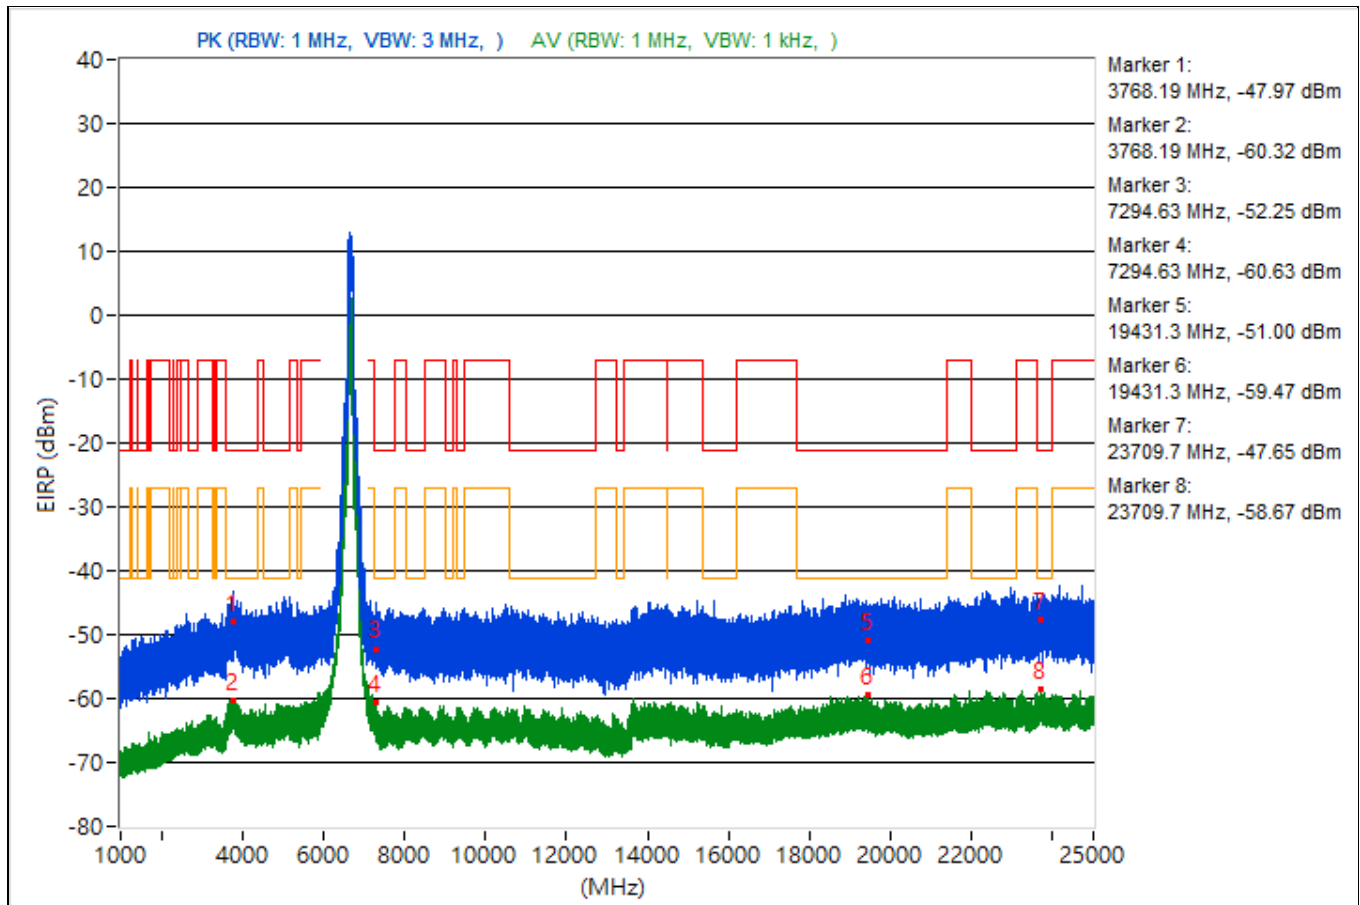


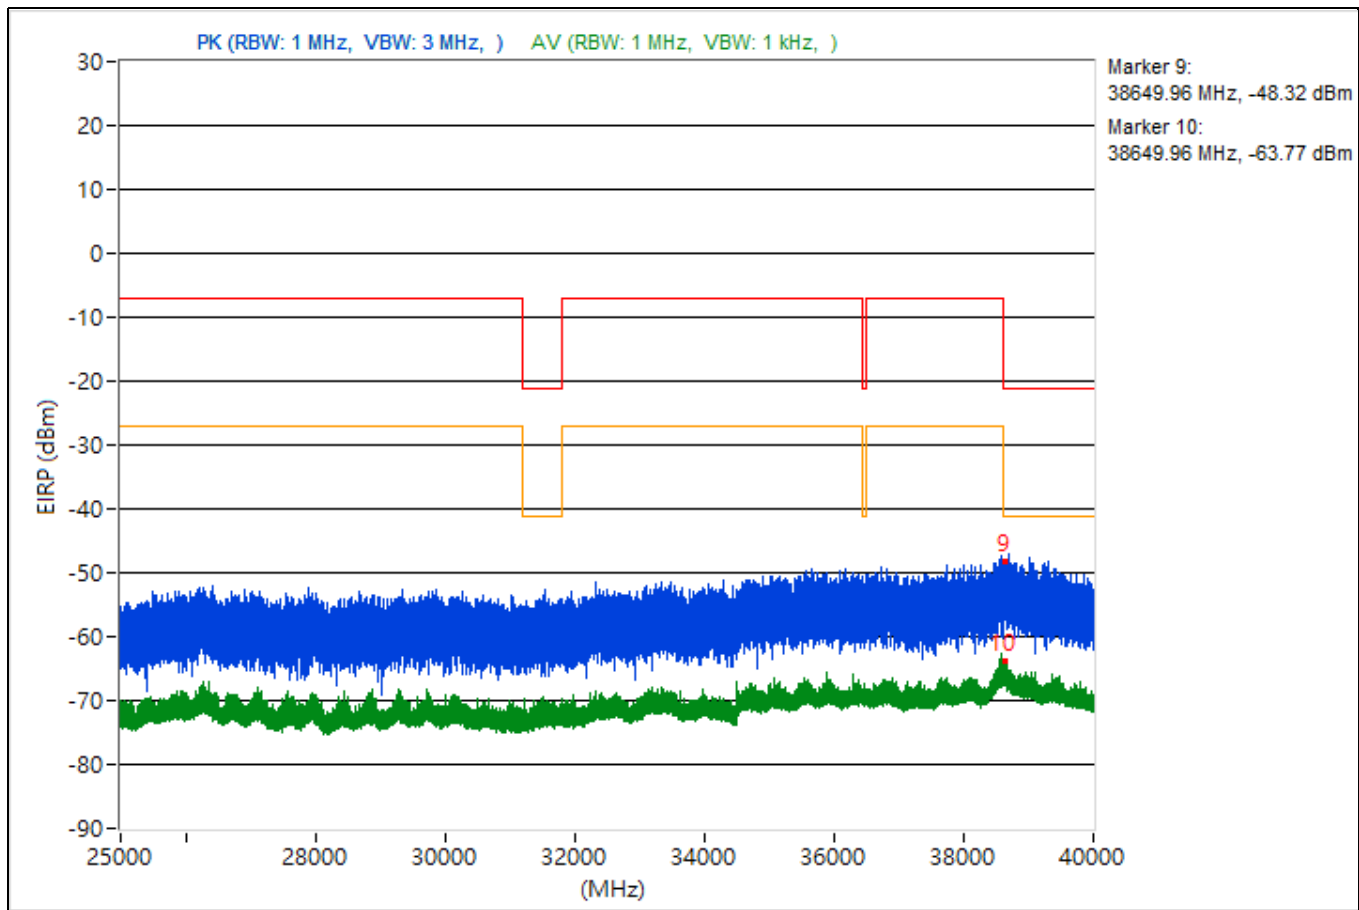


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.86	48.26 PK	74	-25.74	-51.92	4.92	-47
2	3842.86	35.37 AV	54	-18.63	-64.81	4.92	-59.89
3	14473.07	43.53 PK	74	-30.47	-56.65	4.92	-51.73
4	14473.07	34.75 AV	54	-19.25	-65.43	4.92	-60.51
5	19115.3	45.5 PK	74	-28.5	-54.68	4.92	-49.76
6	19115.3	36.33 AV	54	-17.67	-63.85	4.92	-58.93
7	22946.2	48.14 PK	74	-25.86	-52.04	4.92	-47.12
8	22946.2	37.41 AV	54	-16.59	-62.77	4.92	-57.85
9	38629.42	42.71 PK	74	-31.29	-57.47	4.92	-52.55
10	38629.42	34.12 AV	54	-19.88	-66.06	4.92	-61.14

Note: Margin value = Emission Level - Limit value

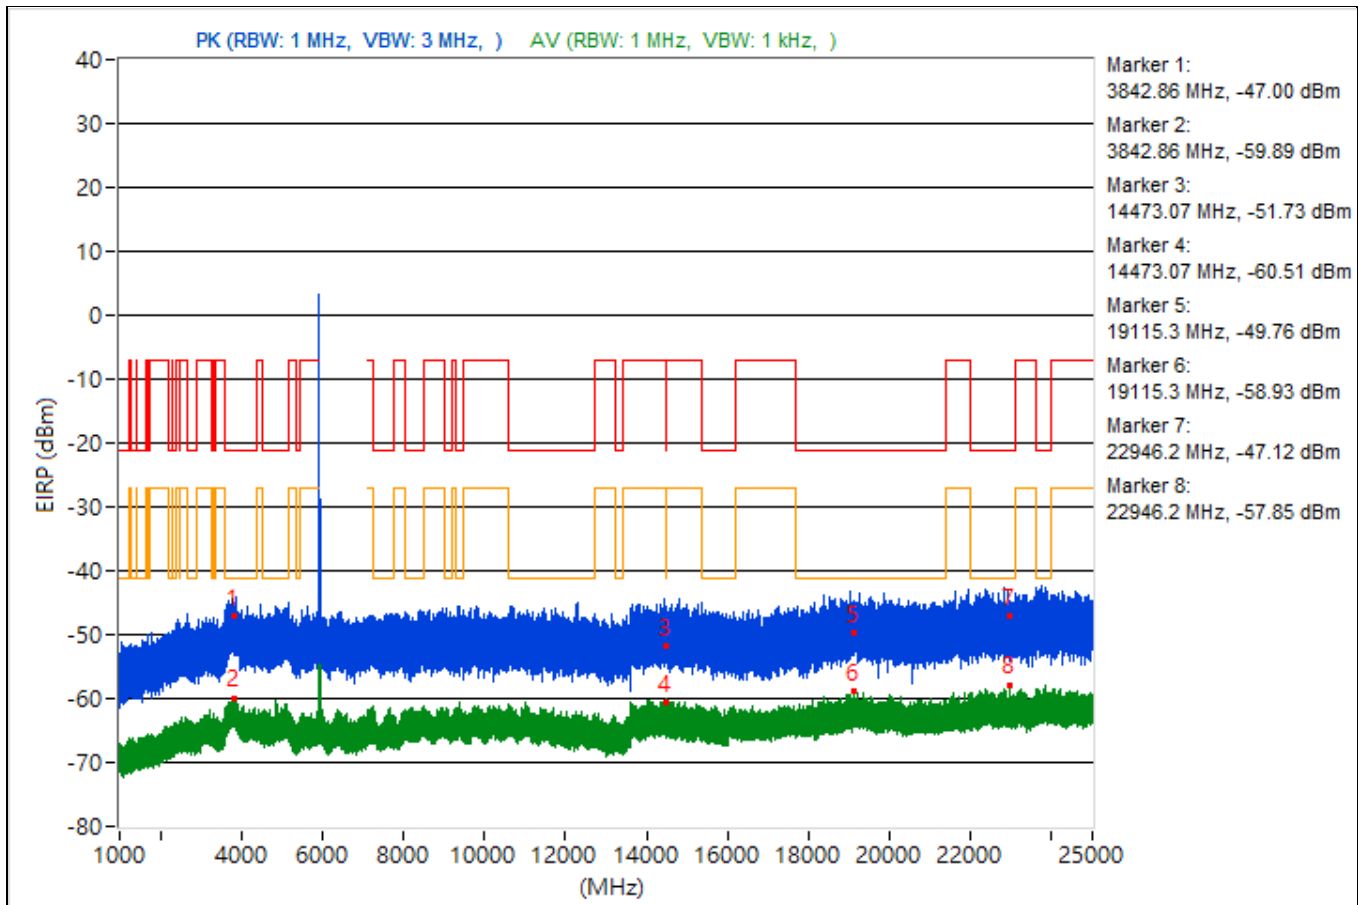


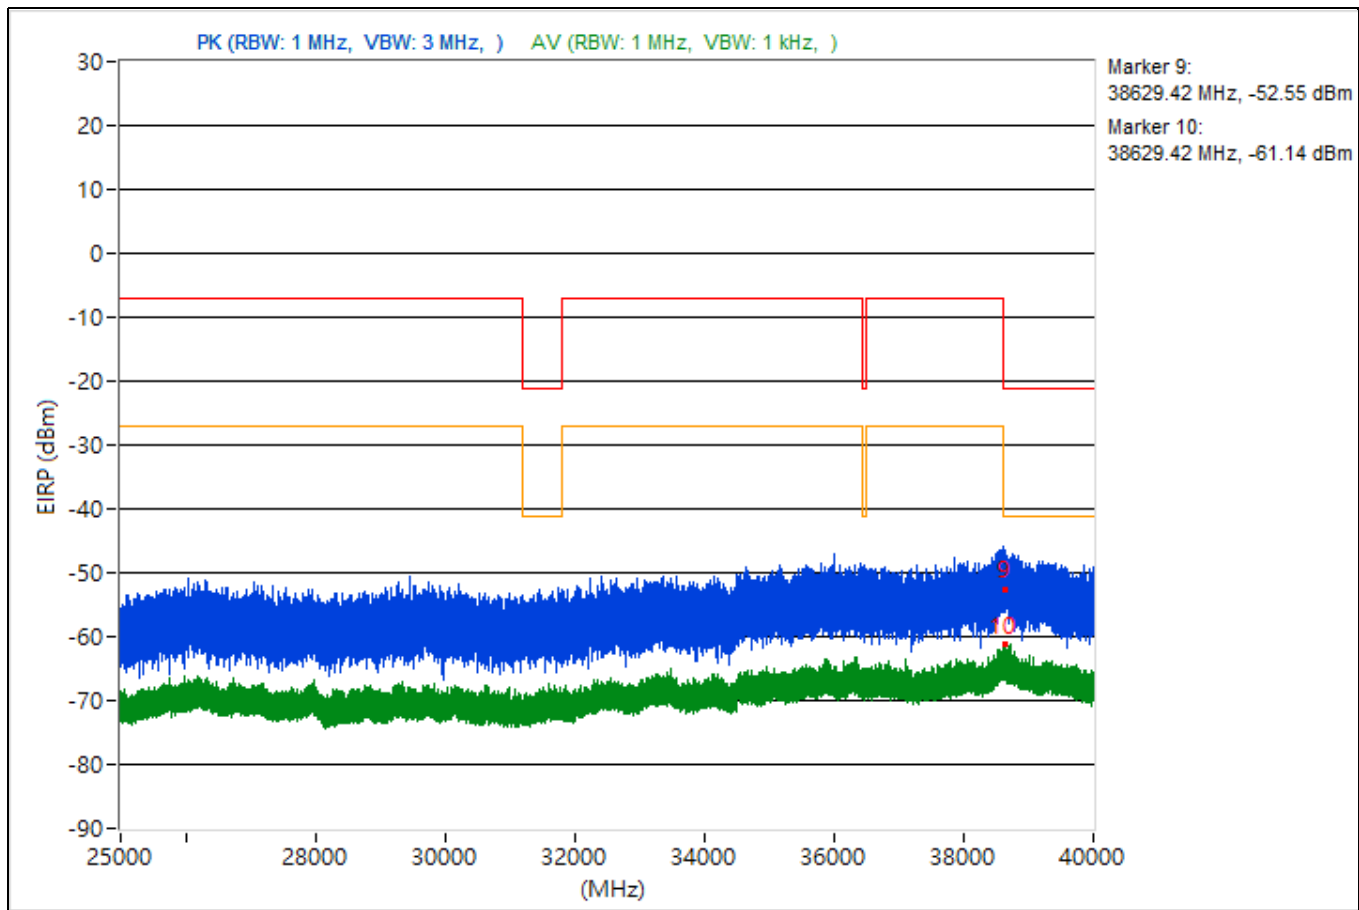


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4986.73	45.57 PK	74	-28.43	-54.61	4.92	-49.69
2	4986.73	35.5 AV	54	-18.5	-64.68	4.92	-59.76
3	15394.4	41.79 PK	74	-32.21	-58.39	4.92	-53.47
4	15394.4	34.91 AV	54	-19.09	-65.27	4.92	-60.35
5	19247.1	49.99 PK	74	-24.01	-50.19	4.92	-45.27
6	19247.1	36.59 AV	54	-17.41	-63.59	4.92	-58.67
7	23608	47.26 PK	74	-26.74	-52.92	4.92	-48
8	23608	37.08 AV	54	-16.92	-63.1	4.92	-58.18
9	38671.02	44.92 PK	74	-29.08	-55.26	4.92	-50.34
10	38671.02	33.55 AV	54	-20.45	-66.63	4.92	-61.71

Note: Margin value = Emission Level - Limit value

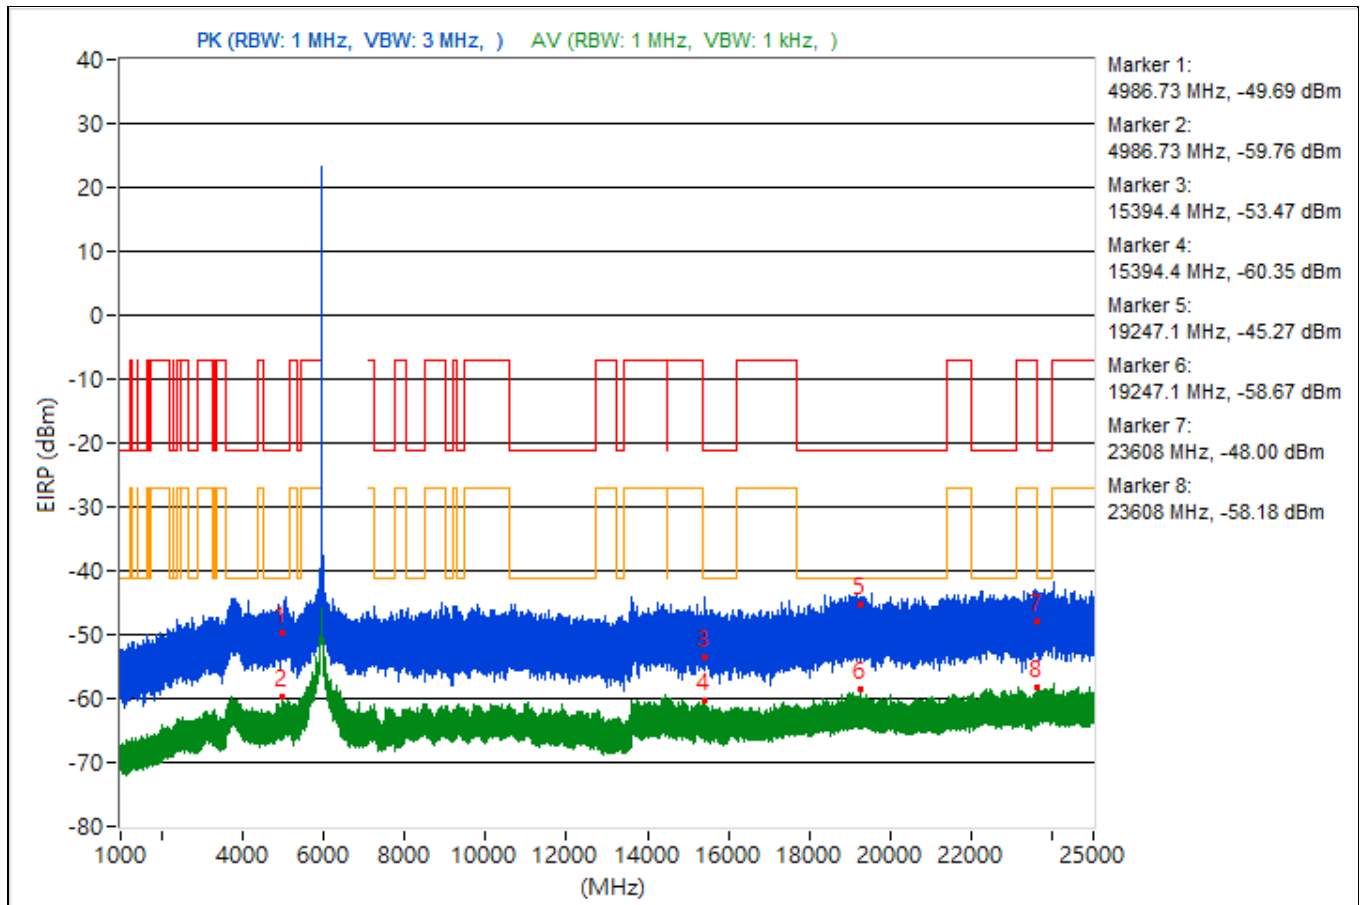


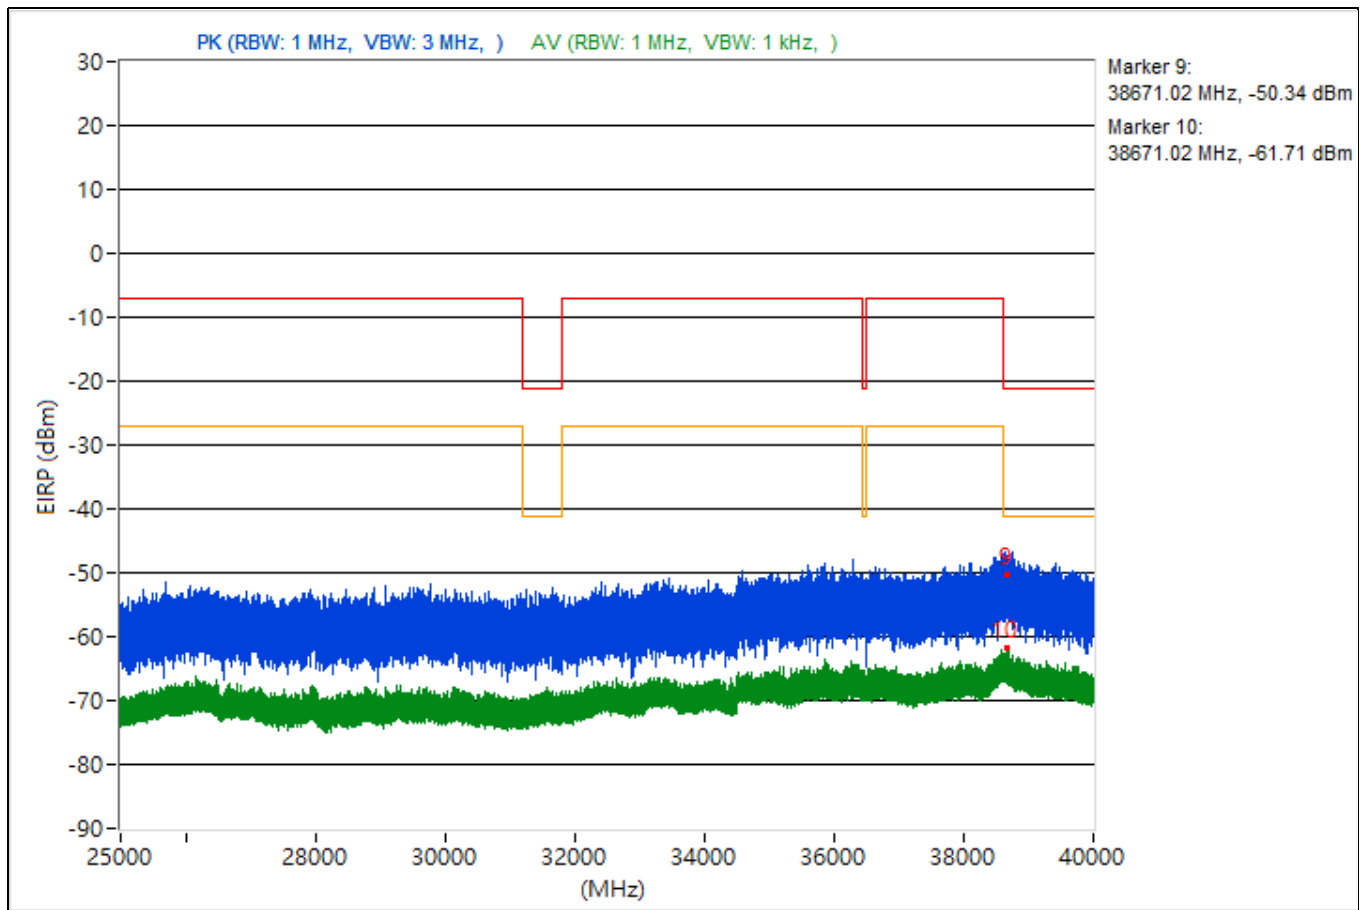


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.17	47.46 PK	74	-26.54	-52.72	4.92	-47.8
2	5446.17	38.59 AV	54	-15.41	-61.59	4.92	-56.67
3	7366.34	44.48 PK	74	-29.52	-55.7	4.92	-50.78
4	7366.34	35.75 AV	54	-18.25	-64.43	4.92	-59.51
5	19368.4	46.86 PK	74	-27.14	-53.32	4.92	-48.4
6	19368.4	36.64 AV	54	-17.36	-63.54	4.92	-58.62
7	23818.8	45.36 PK	74	-28.64	-54.82	4.92	-49.9
8	23818.8	37.43 AV	54	-16.57	-62.75	4.92	-57.83
9	38616.71	43.85 PK	74	-30.15	-56.33	4.92	-51.41
10	38616.71	33.86 AV	54	-20.14	-66.32	4.92	-61.4

Note: Margin value = Emission Level - Limit value

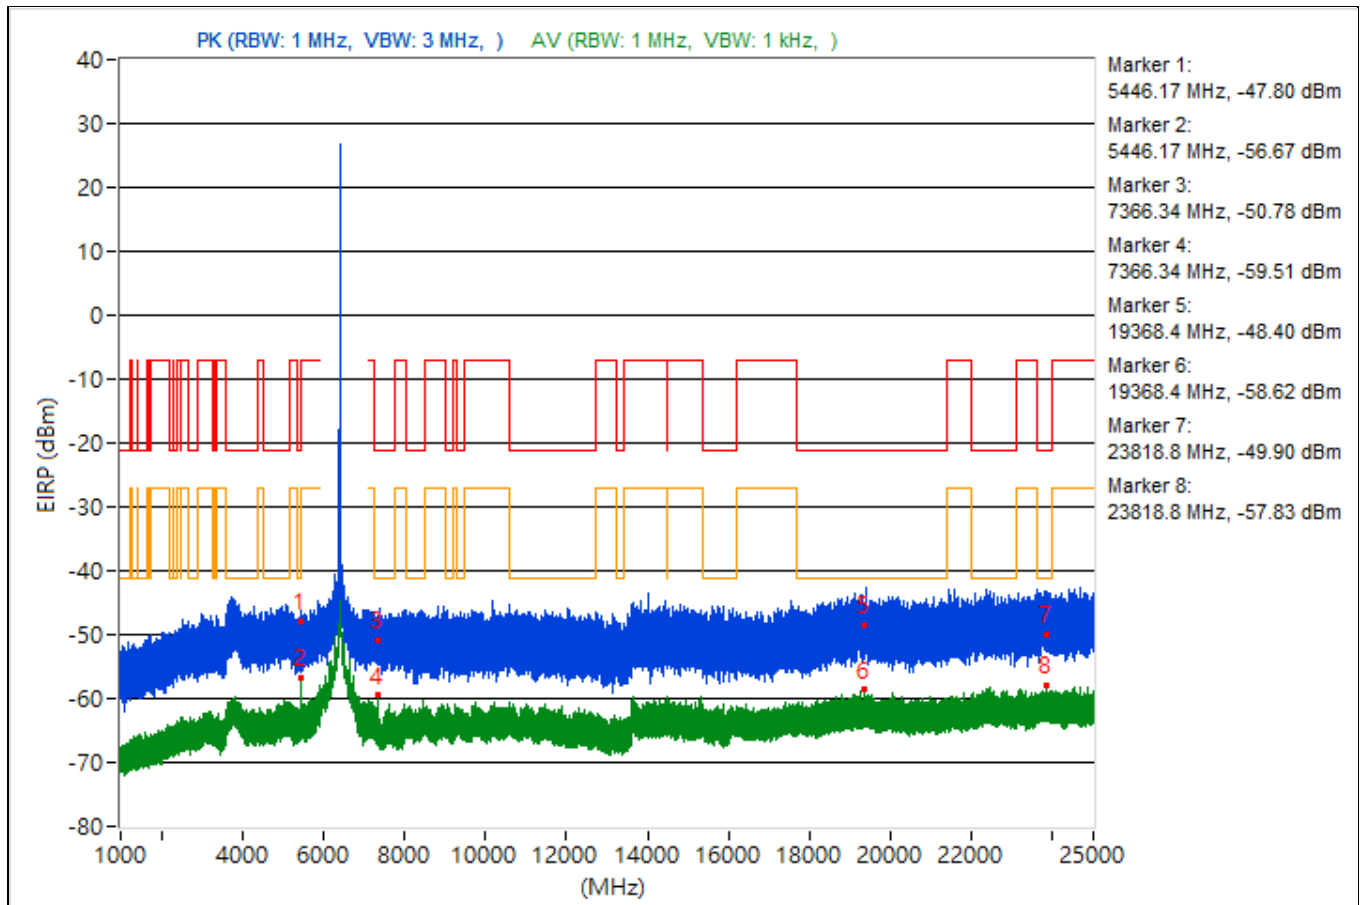


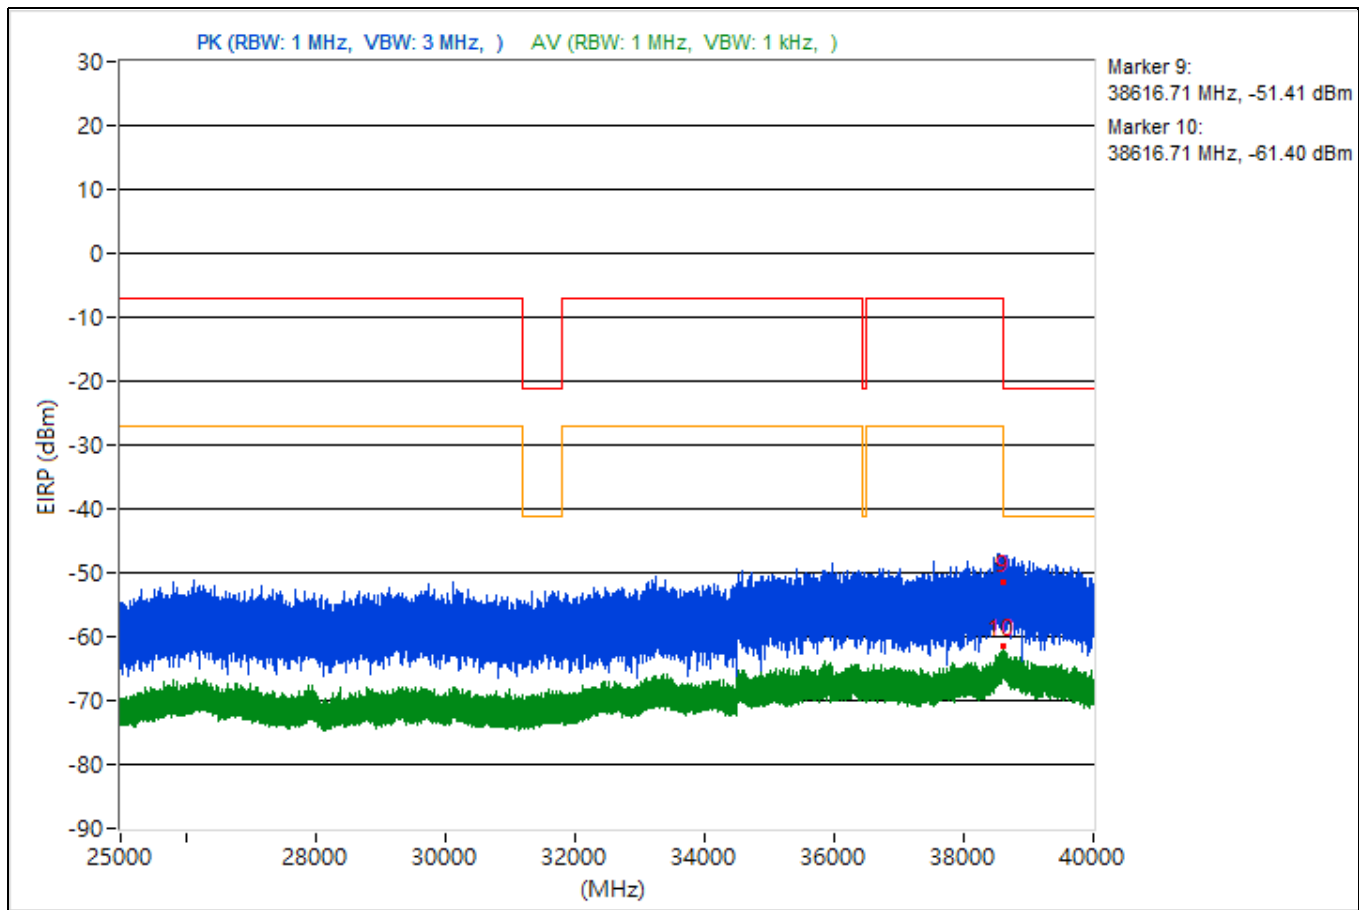


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.38	45.97 PK	74	-28.03	-54.21	4.92	-49.29
2	3813.38	35.63 AV	54	-18.37	-64.55	4.92	-59.63
3	7486.2	44.07 PK	74	-29.93	-56.11	4.92	-51.19
4	7486.2	35.51 AV	54	-18.49	-64.67	4.92	-59.75
5	19000.6	44.81 PK	74	-29.19	-55.37	4.92	-50.45
6	19000.6	36.12 AV	54	-17.88	-64.06	4.92	-59.14
7	22136.1	47.42 PK	74	-26.58	-52.76	4.92	-47.84
8	22136.1	37 AV	54	-17	-63.18	4.92	-58.26
9	38628.36	42.79 PK	74	-31.21	-57.39	4.92	-52.47
10	38628.36	33.01 AV	54	-20.99	-67.17	4.92	-62.25

Note: Margin value = Emission Level - Limit value

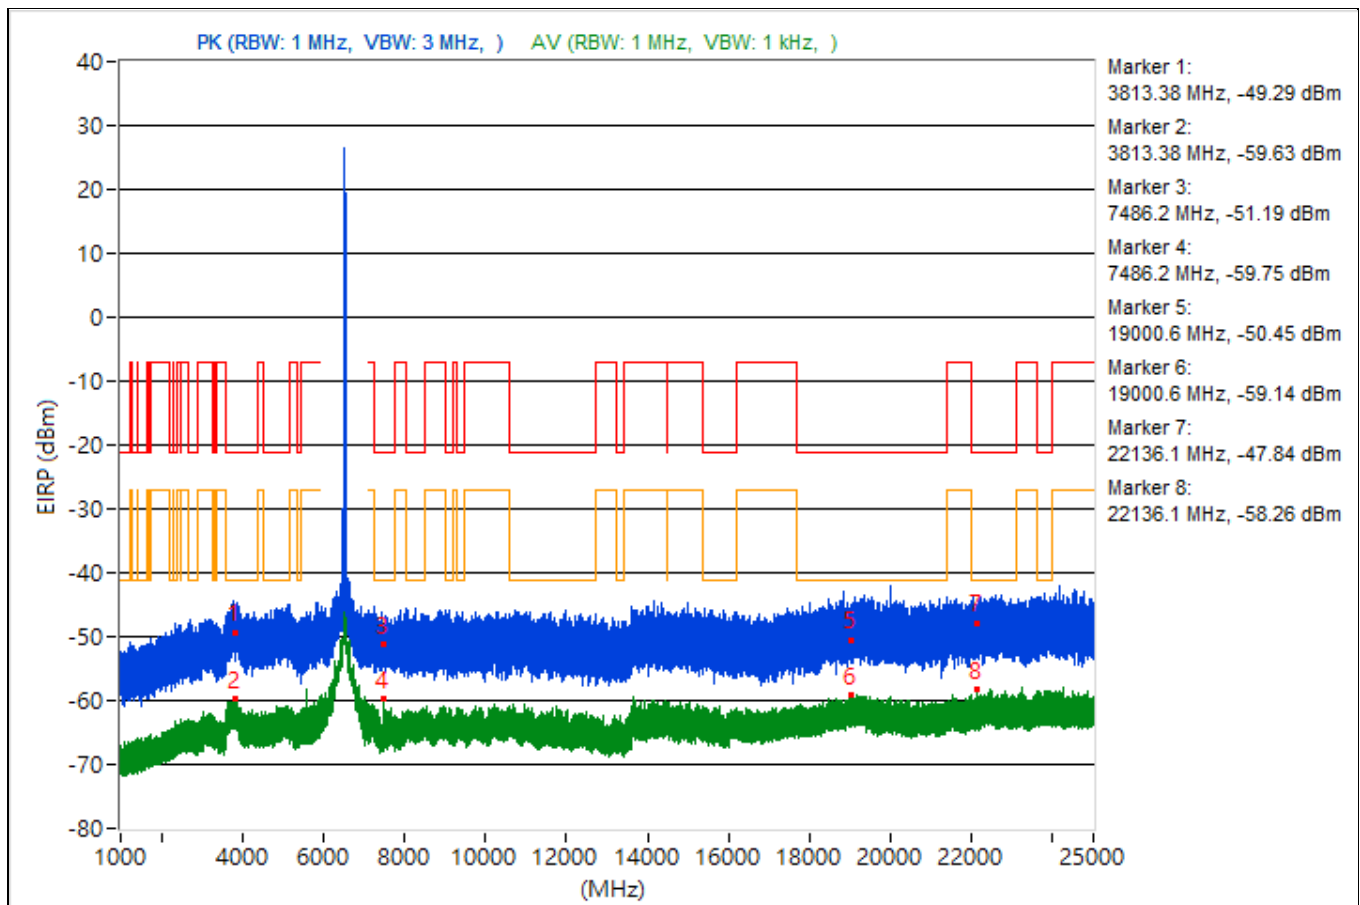


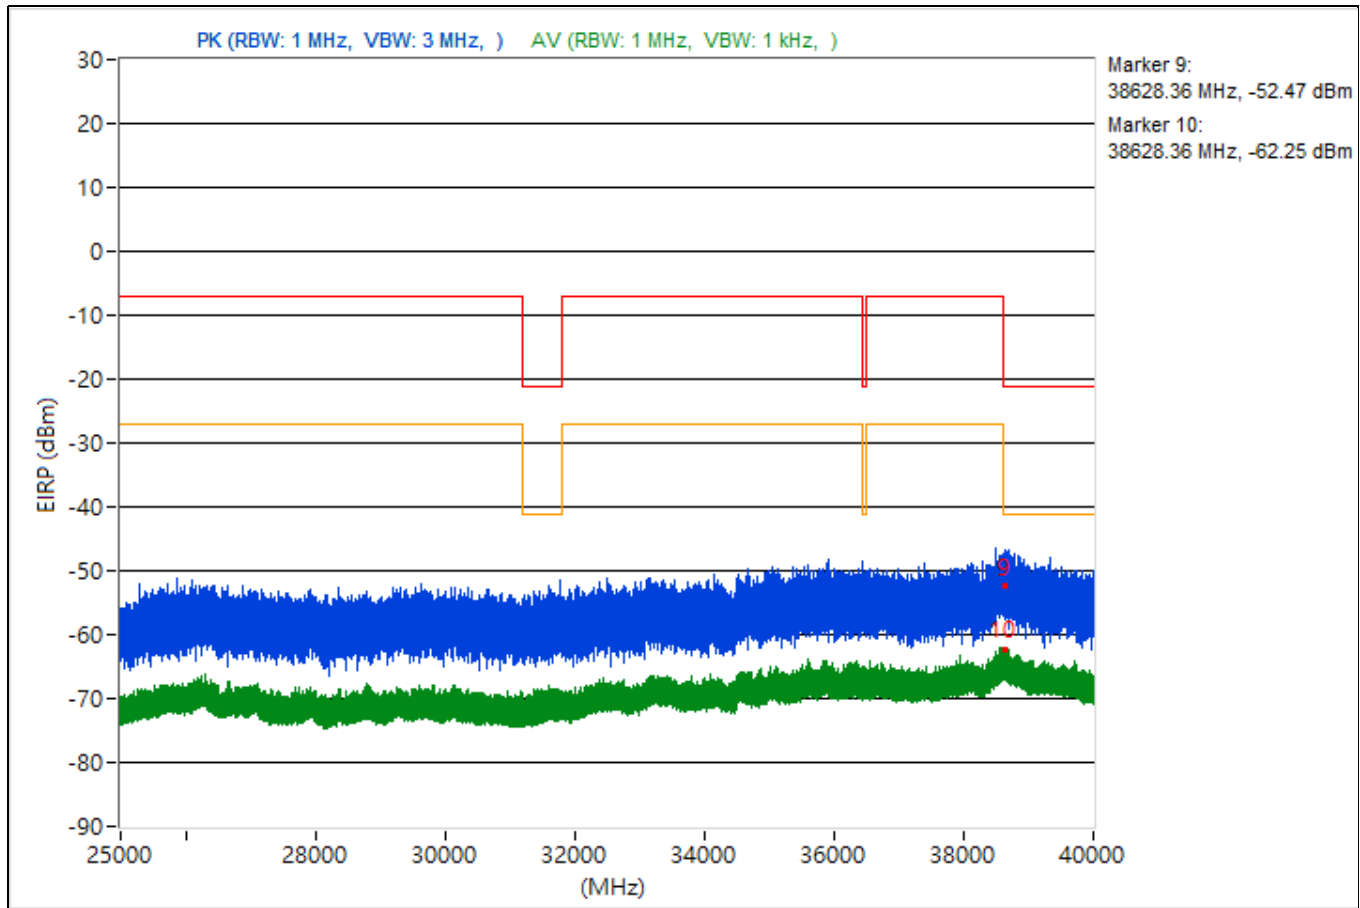


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.52	47.33 PK	74	-26.67	-52.85	4.92	-47.93
2	3770.52	35.46 AV	54	-18.54	-64.72	4.92	-59.8
3	7293	44.28 PK	74	-29.72	-55.9	4.92	-50.98
4	7293	35.02 AV	54	-18.98	-65.16	4.92	-60.24
5	20099.1	45.66 PK	74	-28.34	-54.52	4.92	-49.6
6	20099.1	36.26 AV	54	-17.74	-63.92	4.92	-59
7	23927.6	48.51 PK	74	-25.49	-51.67	4.92	-46.75
8	23927.6	37.7 AV	54	-16.3	-62.48	4.92	-57.56
9	38638.22	43.84 PK	74	-30.16	-56.34	4.92	-51.42
10	38638.22	33.11 AV	54	-20.89	-67.07	4.92	-62.15

Note: Margin value = Emission Level - Limit value

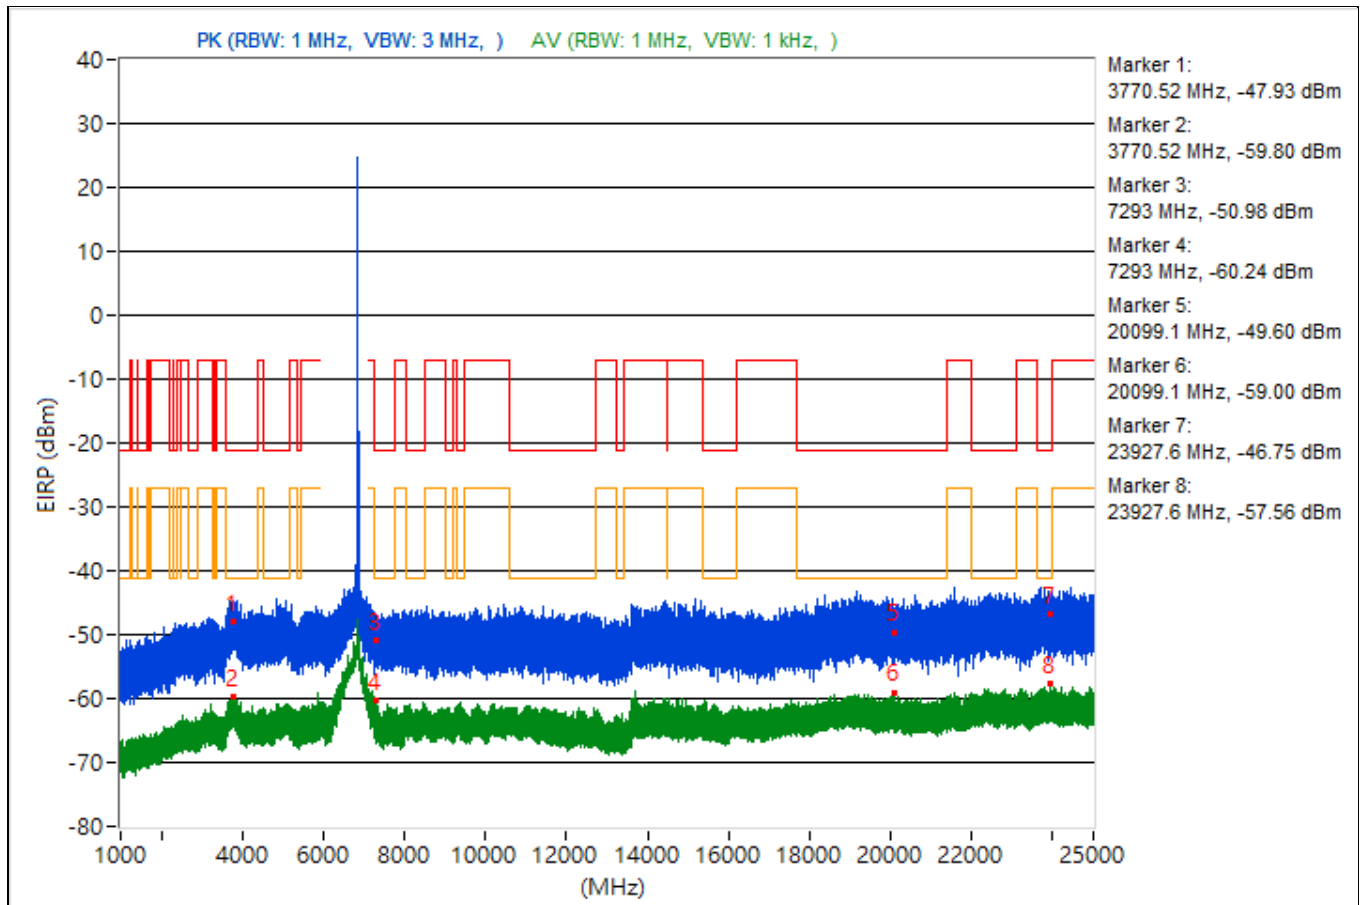


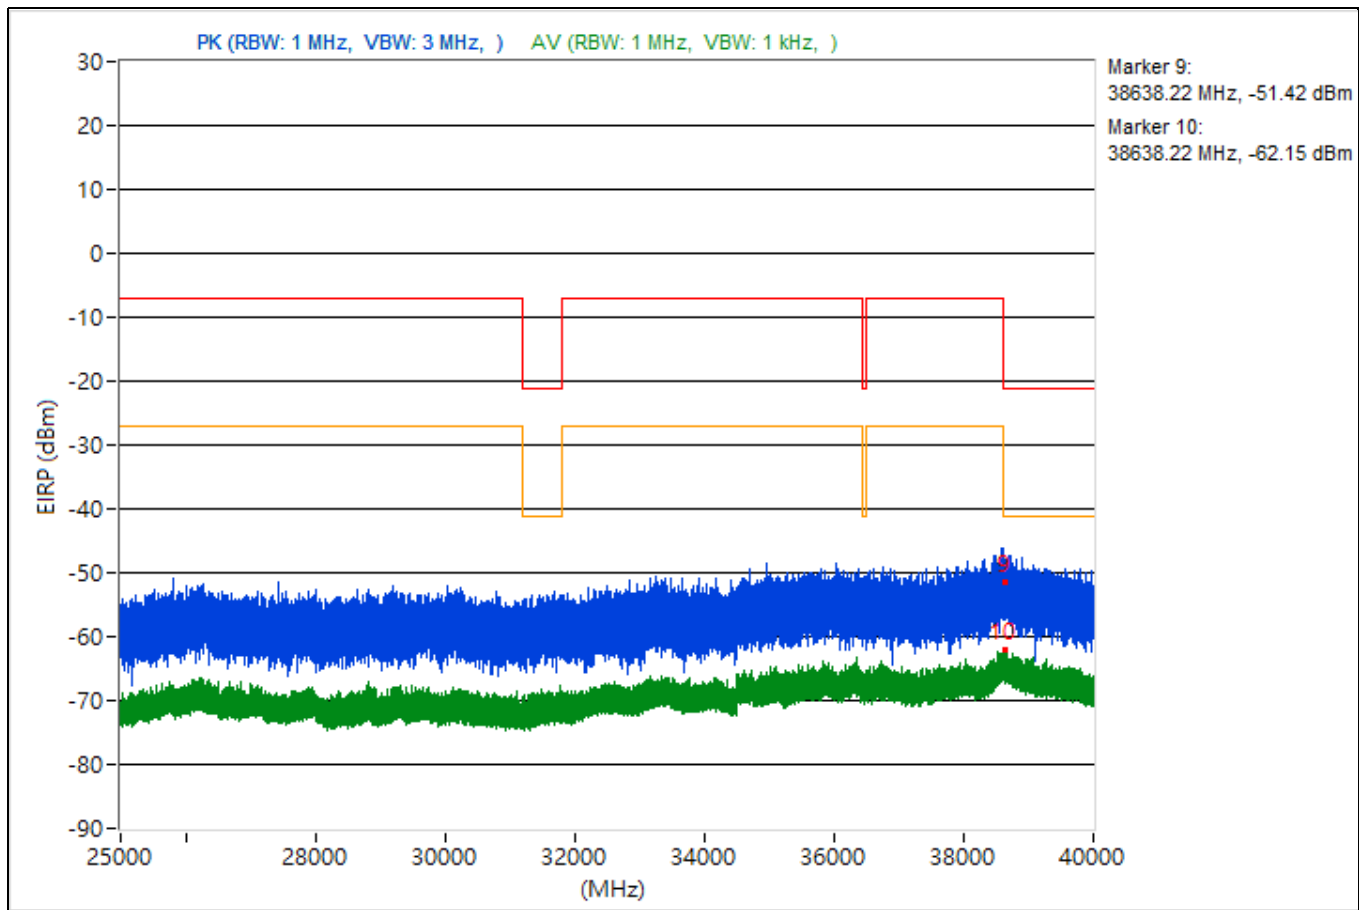


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.88	47.78 PK	74	-26.22	-52.4	4.92	-47.48
2	3830.88	35.37 AV	54	-18.63	-64.81	4.92	-59.89
3	14484.09	43.79 PK	74	-30.21	-56.39	4.92	-51.47
4	14484.09	34.57 AV	54	-19.43	-65.61	4.92	-60.69
5	19029.1	45.24 PK	74	-28.76	-54.94	4.92	-50.02
6	19029.1	36.42 AV	54	-17.58	-63.76	4.92	-58.84
7	23647.3	47.67 PK	74	-26.33	-52.51	4.92	-47.59
8	23647.3	36.78 AV	54	-17.22	-63.4	4.92	-58.48
9	38609.07	41.82 PK	74	-32.18	-58.36	4.92	-53.44
10	38609.07	33.49 AV	54	-20.51	-66.69	4.92	-61.77

Note: Margin value = Emission Level - Limit value

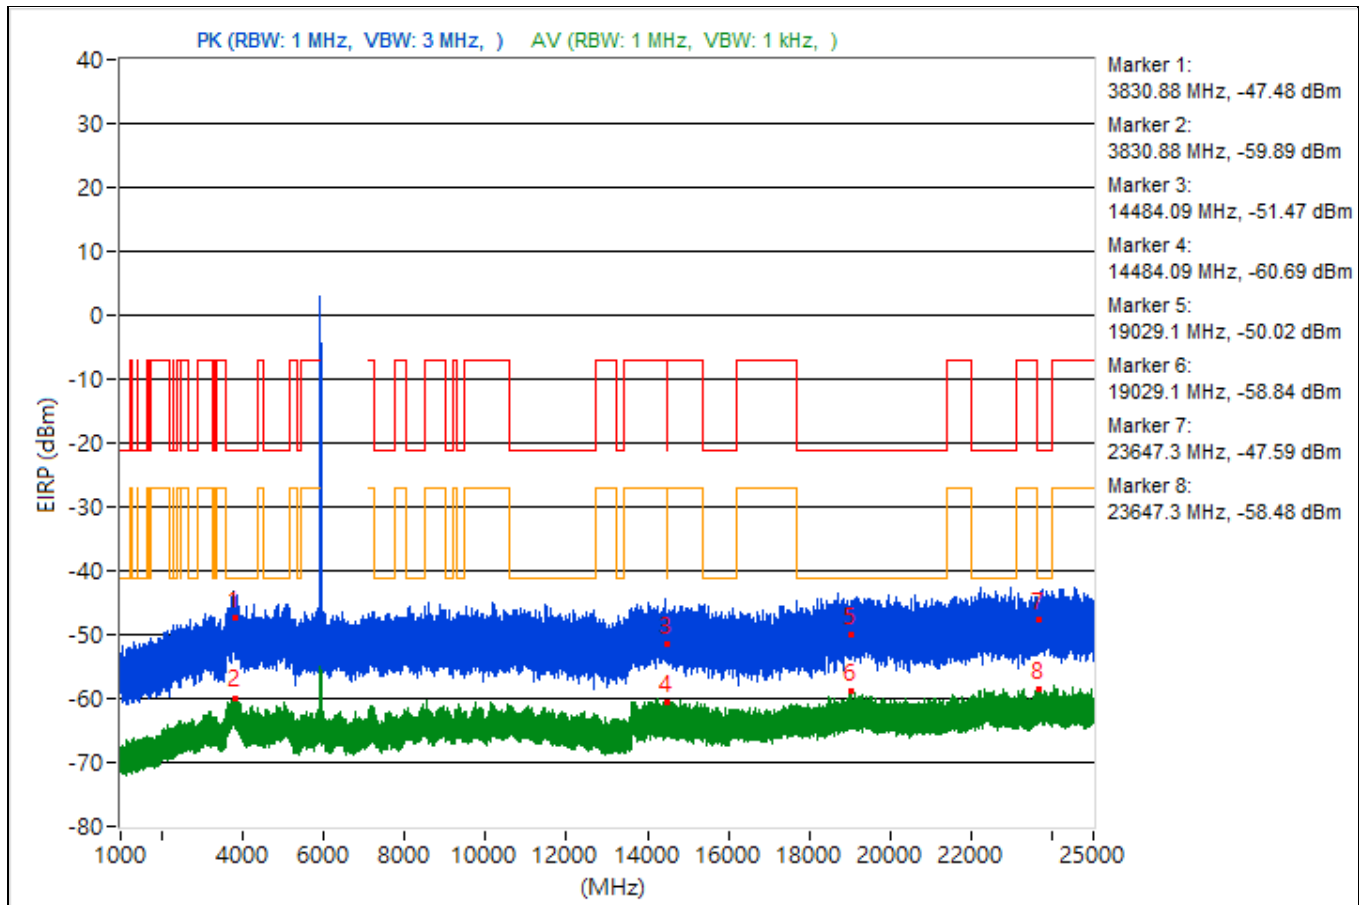


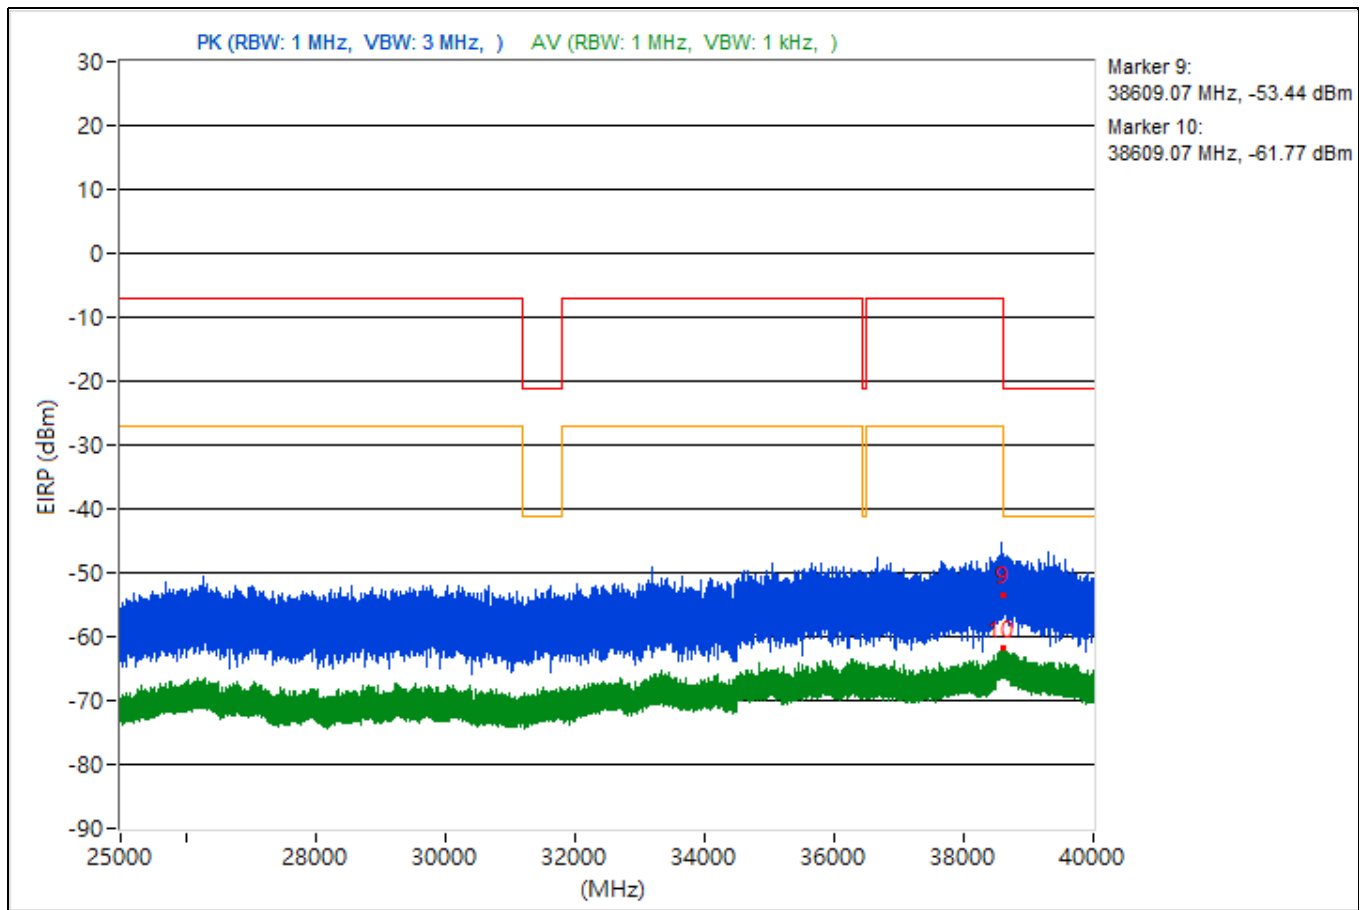


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3780.24	47.51 PK	74	-26.49	-52.67	4.92	-47.75
2	3780.24	35.57 AV	54	-18.43	-64.61	4.92	-59.69
3	14491.47	45.66 PK	74	-28.34	-54.52	4.92	-49.6
4	14491.47	35.34 AV	54	-18.66	-64.84	4.92	-59.92
5	19620.3	44.33 PK	74	-29.67	-55.85	4.92	-50.93
6	19620.3	36.77 AV	54	-17.23	-63.41	4.92	-58.49
7	23649.5	45.1 PK	74	-28.9	-55.08	4.92	-50.16
8	23649.5	37.56 AV	54	-16.44	-62.62	4.92	-57.7
9	38610.04	41.56 PK	74	-32.44	-58.62	4.92	-53.7
10	38610.04	33.02 AV	54	-20.98	-67.16	4.92	-62.24

Note: Margin value = Emission Level - Limit value

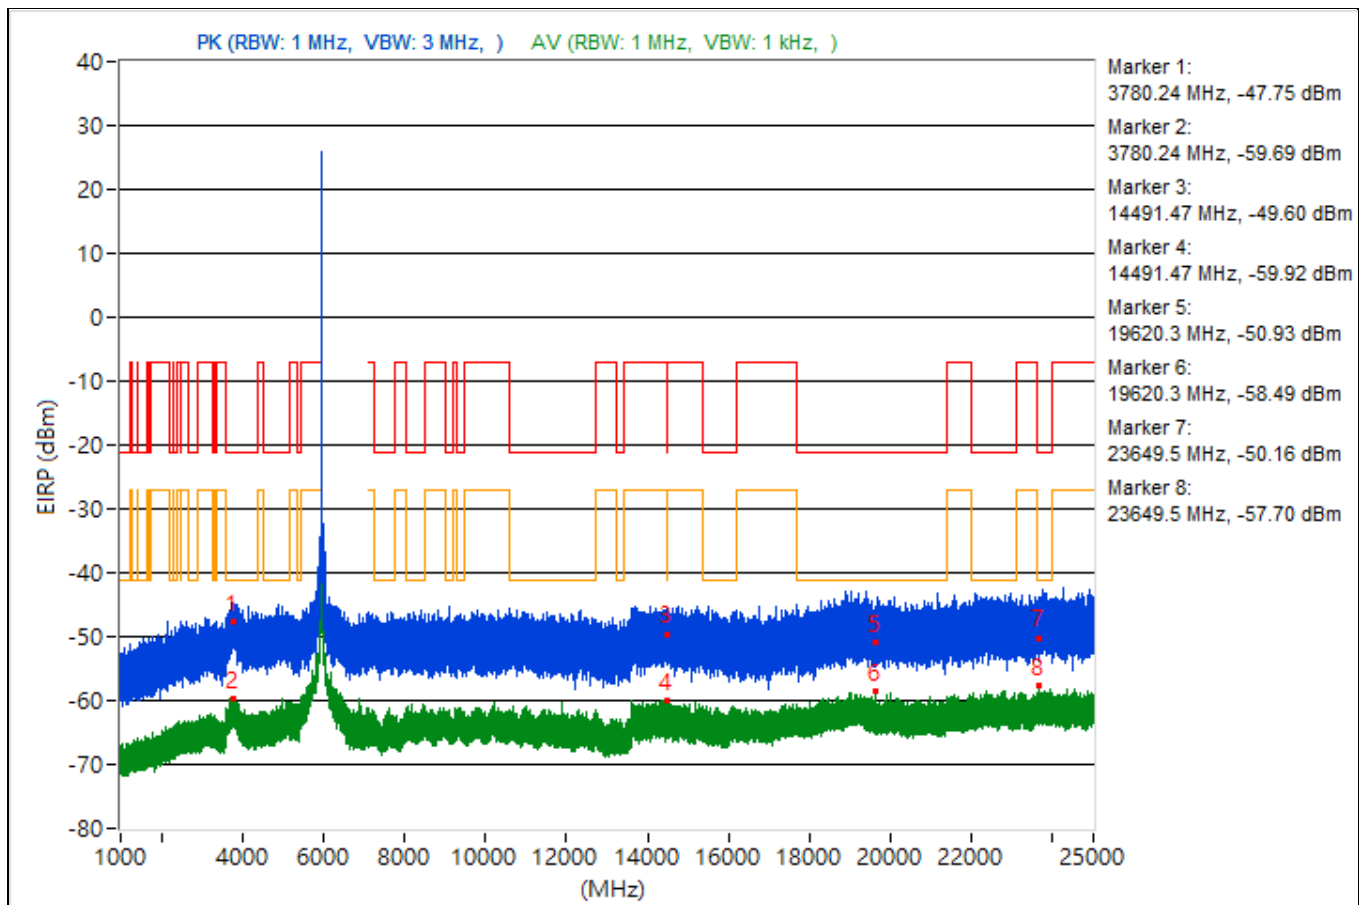


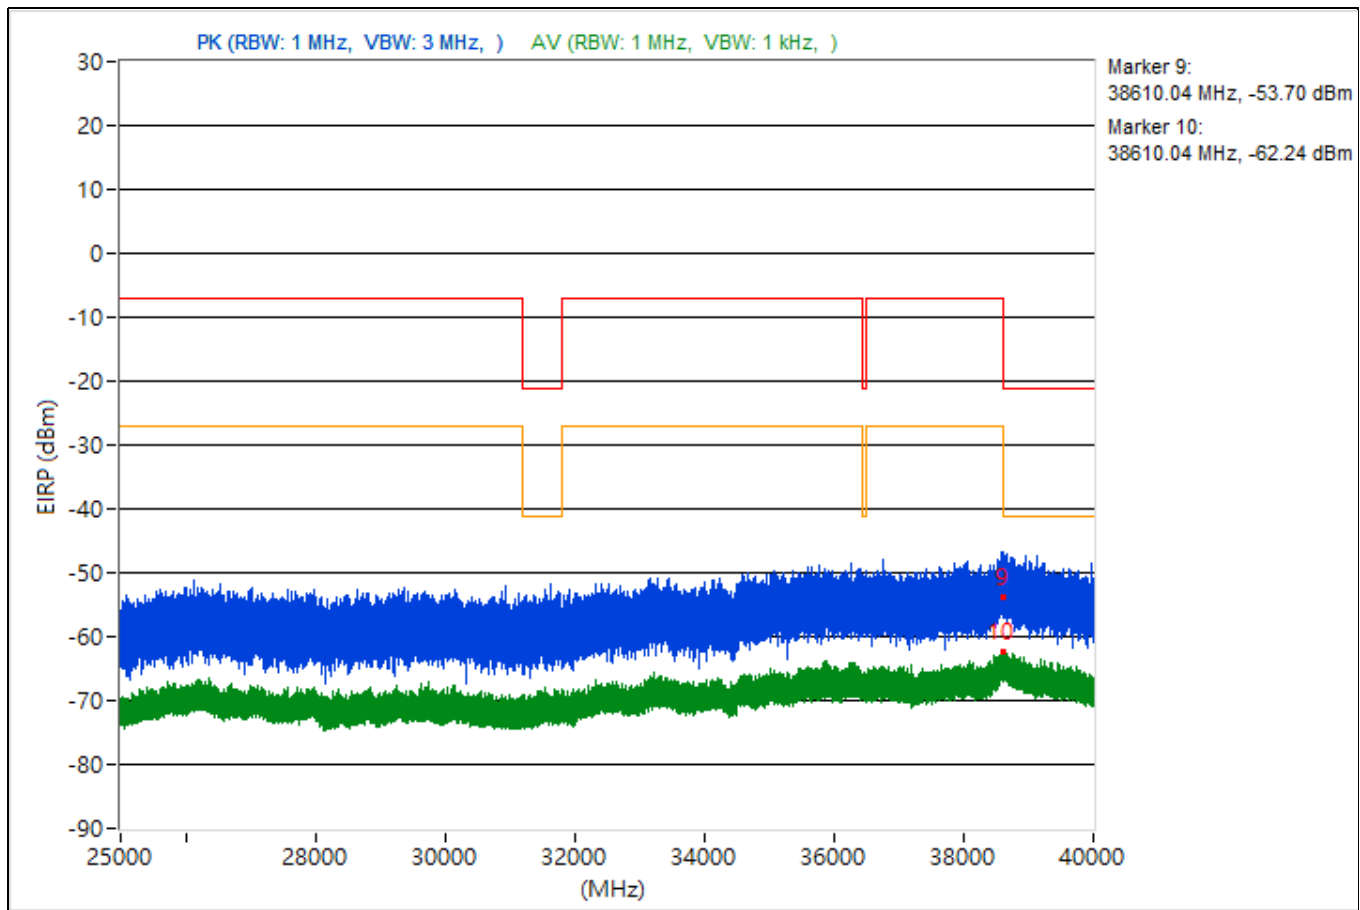


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.01	44.3 PK	74	-29.7	-55.88	4.92	-50.96
2	5446.01	36.85 AV	54	-17.15	-63.33	4.92	-58.41
3	7367.51	46.78 PK	74	-27.22	-53.4	4.92	-48.48
4	7367.51	35.71 AV	54	-18.29	-64.47	4.92	-59.55
5	19263.6	47.63 PK	74	-26.37	-52.55	4.92	-47.63
6	19263.6	36.78 AV	54	-17.22	-63.4	4.92	-58.48
7	23706	45.92 PK	74	-28.08	-54.26	4.92	-49.34
8	23706	37.27 AV	54	-16.73	-62.91	4.92	-57.99
9	38658.4	41.13 PK	74	-32.87	-59.05	4.92	-54.13
10	38658.4	33.25 AV	54	-20.75	-66.93	4.92	-62.01

Note: Margin value = Emission Level - Limit value

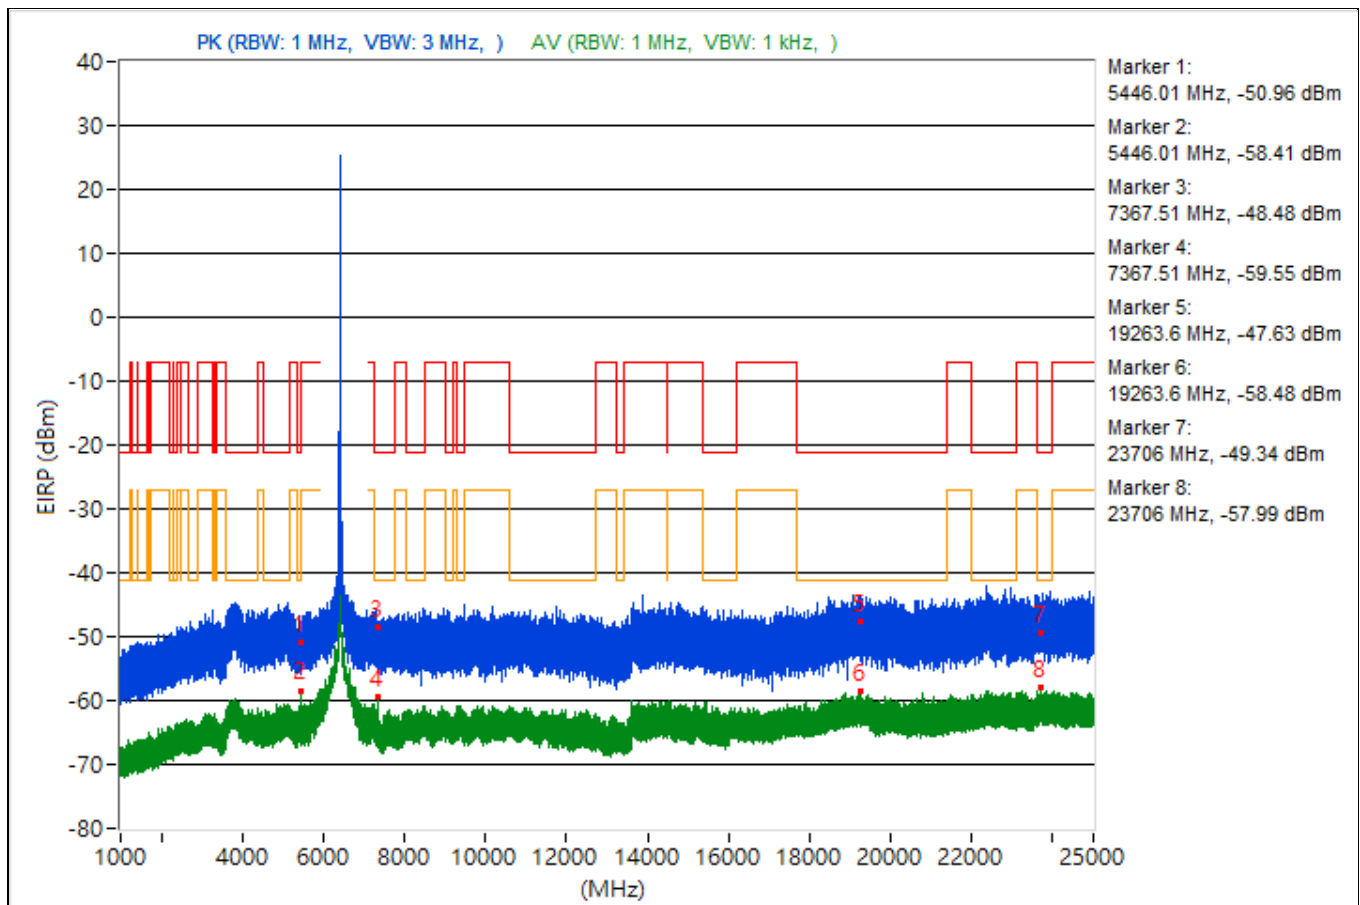


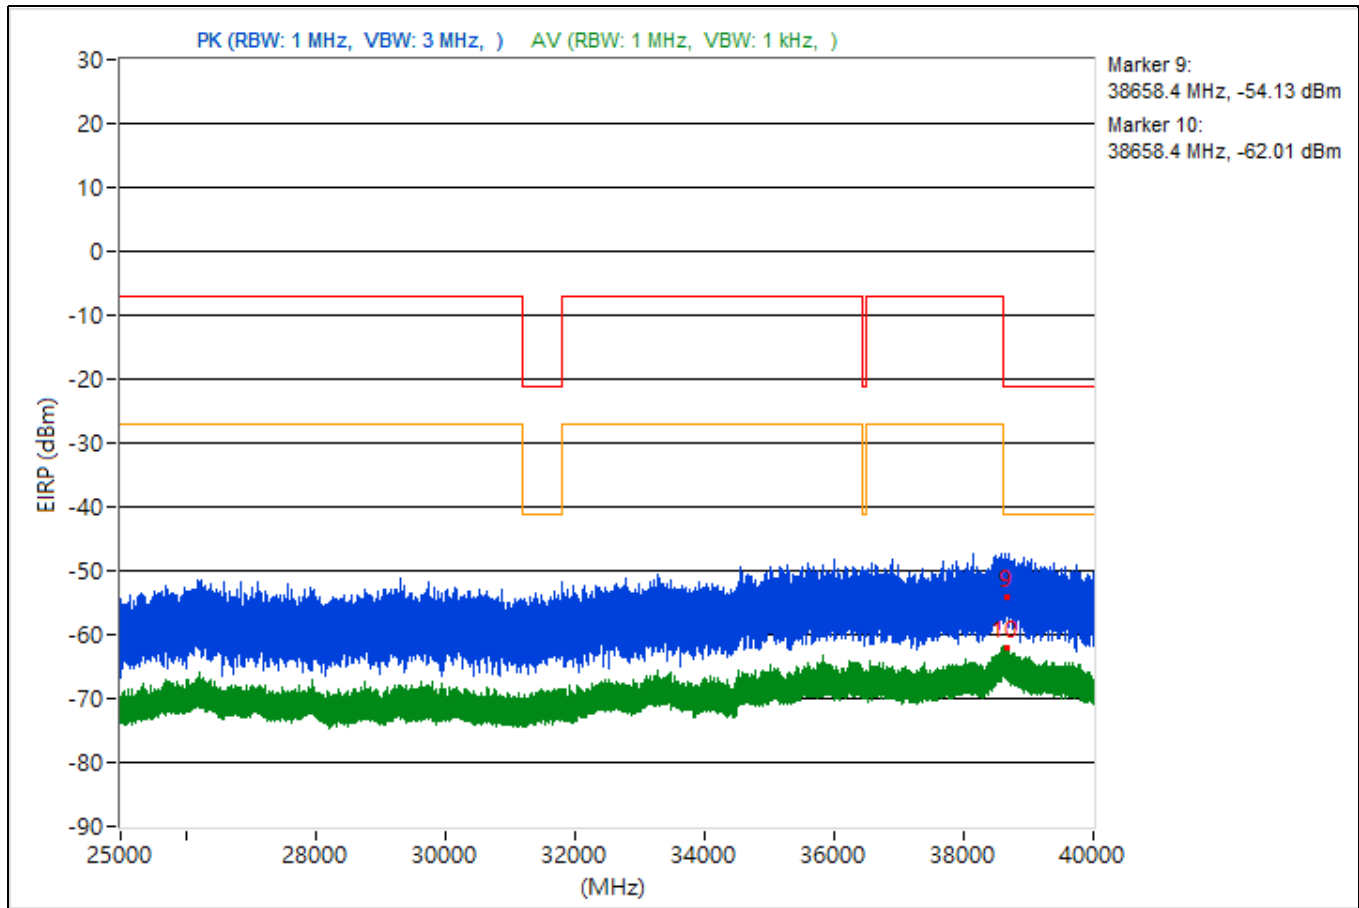


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.31	50.87 PK	74	-23.13	-49.31	4.92	-44.39
2	3828.31	36.31 AV	54	-17.69	-63.87	4.92	-58.95
3	14479.73	43.86 PK	74	-30.14	-56.32	4.92	-51.4
4	14479.73	35.46 AV	54	-18.54	-64.72	4.92	-59.8
5	19019.9	45.24 PK	74	-28.76	-54.94	4.92	-50.02
6	19019.9	36.45 AV	54	-17.55	-63.73	4.92	-58.81
7	22428.4	44.16 PK	74	-29.84	-56.02	4.92	-51.1
8	22428.4	37.47 AV	54	-16.53	-62.71	4.92	-57.79
9	38652.36	43.33 PK	74	-30.67	-56.85	4.92	-51.93
10	38652.36	33.48 AV	54	-20.52	-66.7	4.92	-61.78

Note: Margin value = Emission Level - Limit value

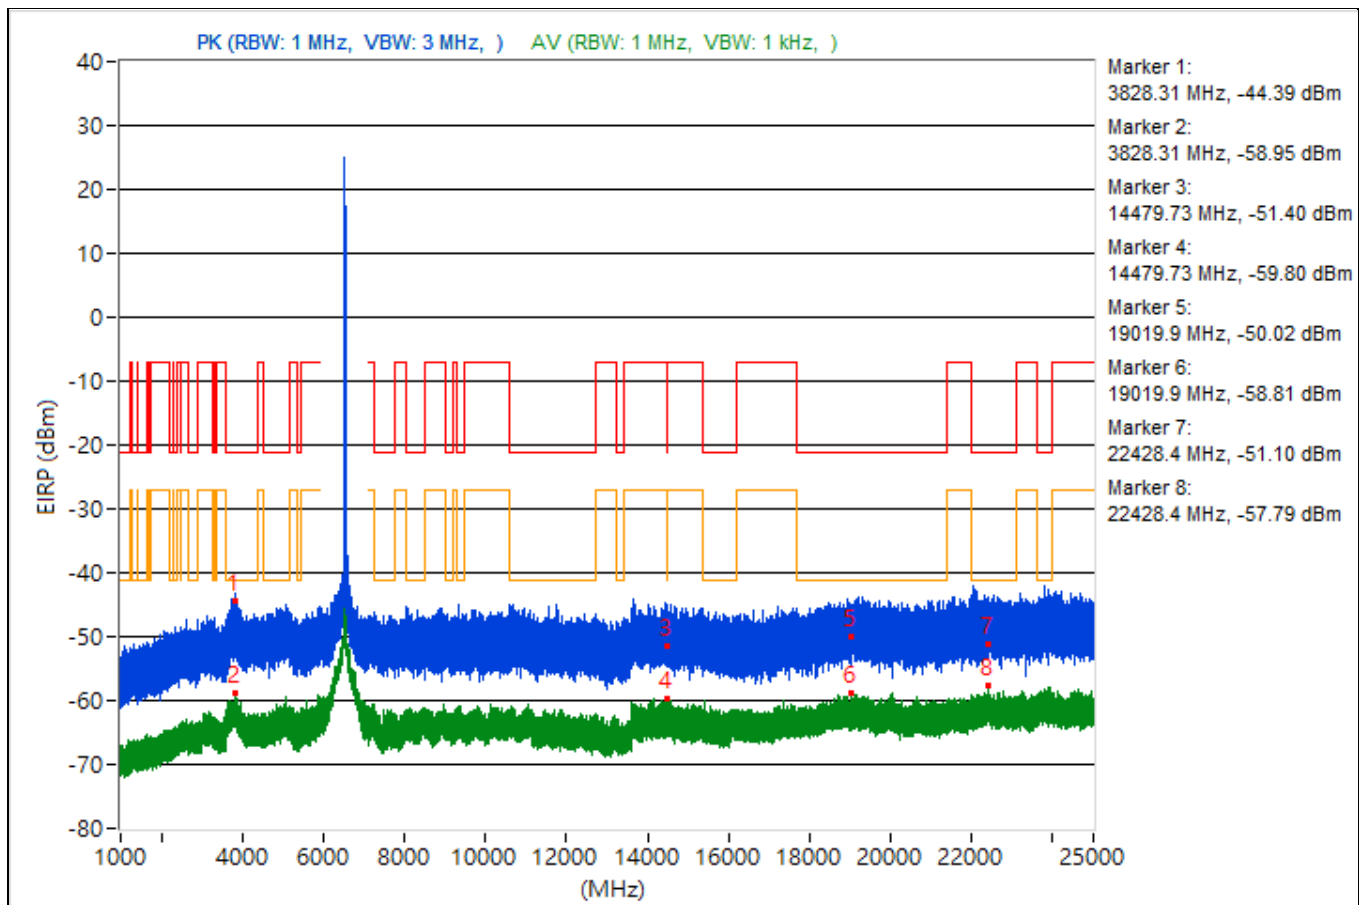


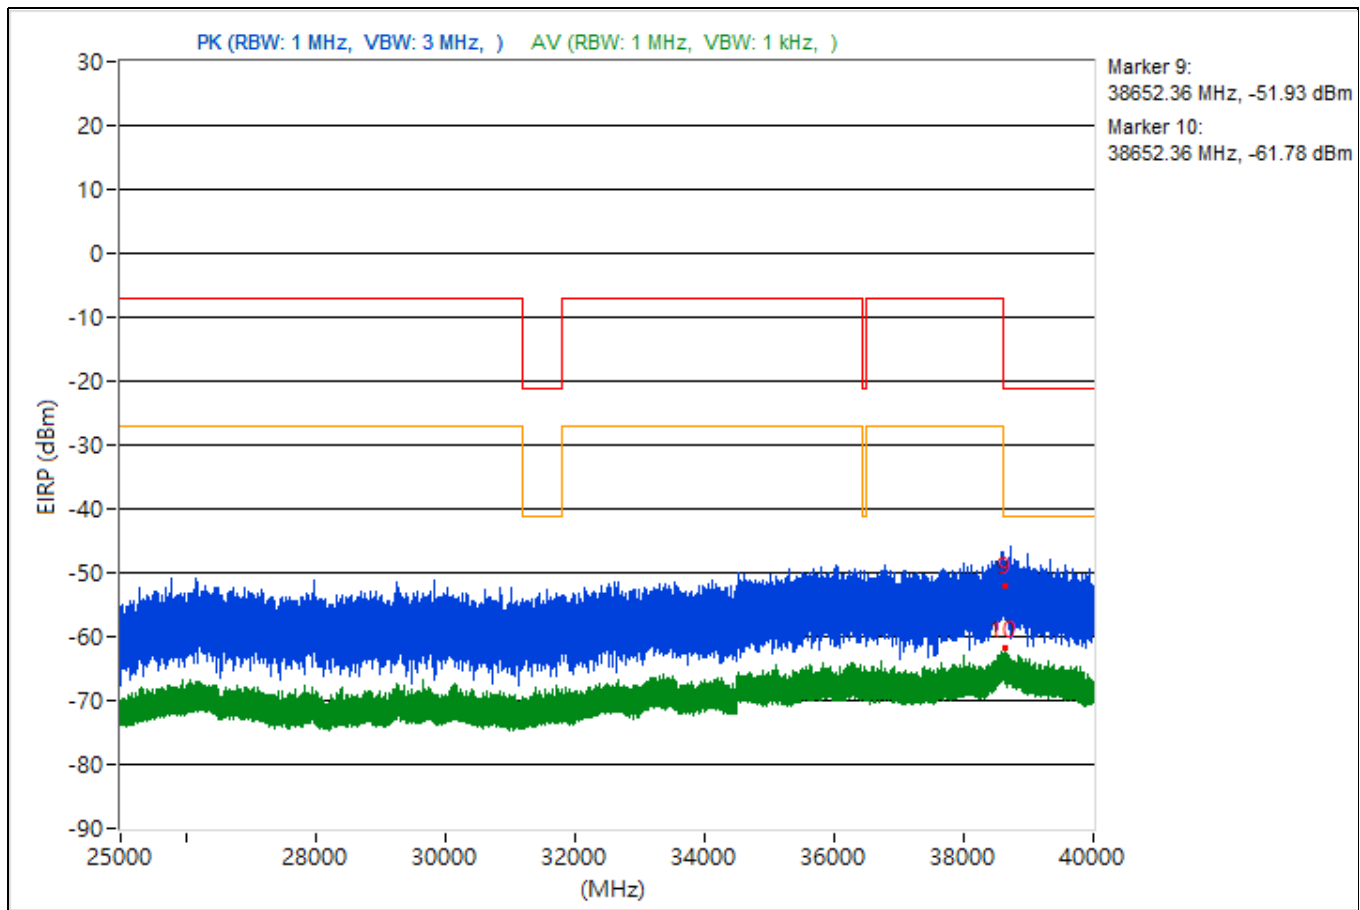


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3740.66	48.27 PK	74	-25.73	-51.91	4.92	-46.99
2	3740.66	36.04 AV	54	-17.96	-64.14	4.92	-59.22
3	7275.27	44.79 PK	74	-29.21	-55.39	4.92	-50.47
4	7275.27	35.6 AV	54	-18.4	-64.58	4.92	-59.66
5	19224.3	48.03 PK	74	-25.97	-52.15	4.92	-47.23
6	19224.3	36.81 AV	54	-17.19	-63.37	4.92	-58.45
7	23768.7	45.16 PK	74	-28.84	-55.02	4.92	-50.1
8	23768.7	36.96 AV	54	-17.04	-63.22	4.92	-58.3
9	38720.36	43.16 PK	74	-30.84	-57.02	4.92	-52.1
10	38720.36	33.27 AV	54	-20.73	-66.91	4.92	-61.99

Note: Margin value = Emission Level - Limit value

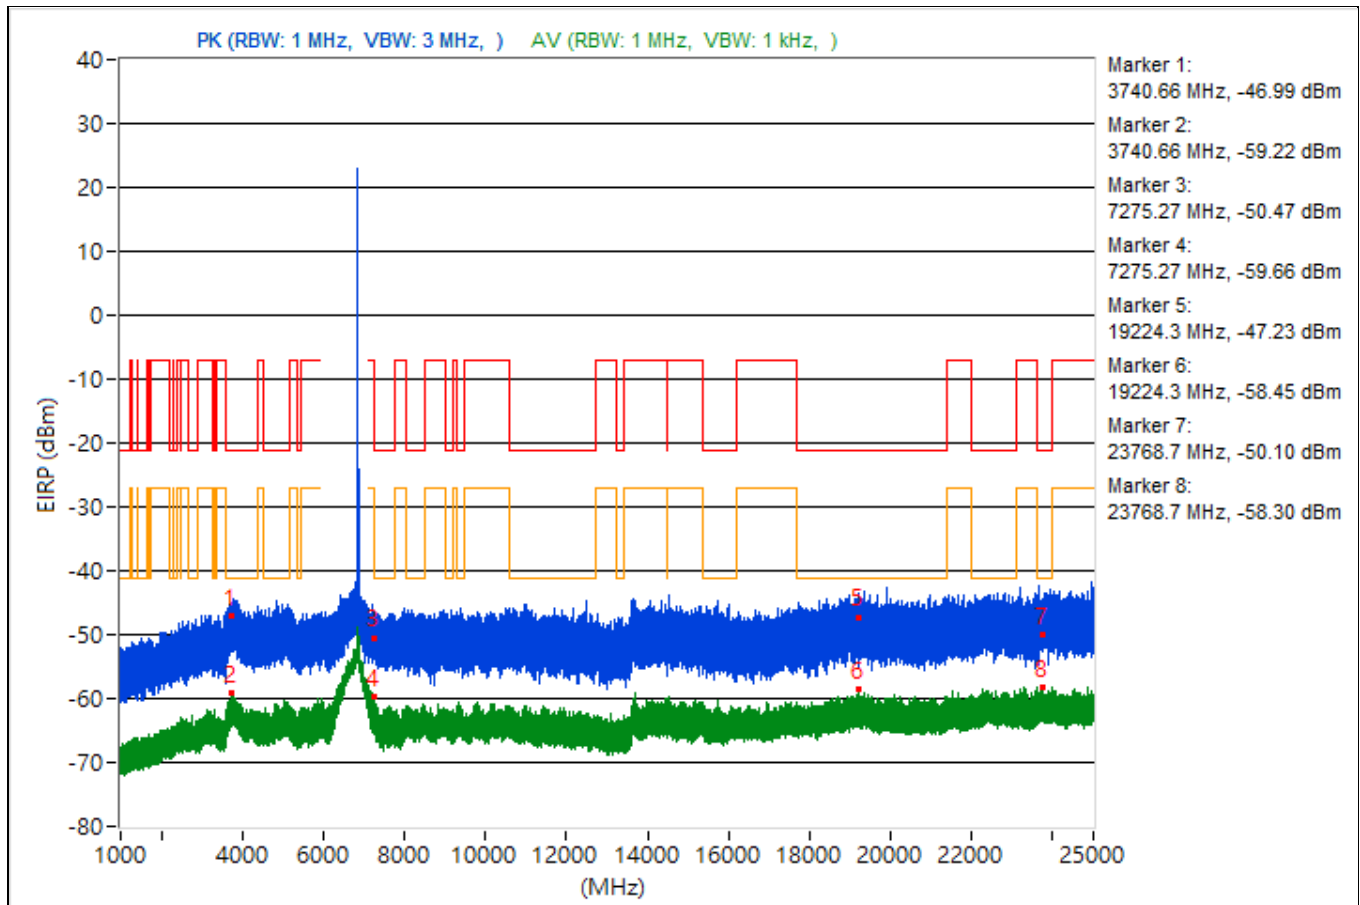


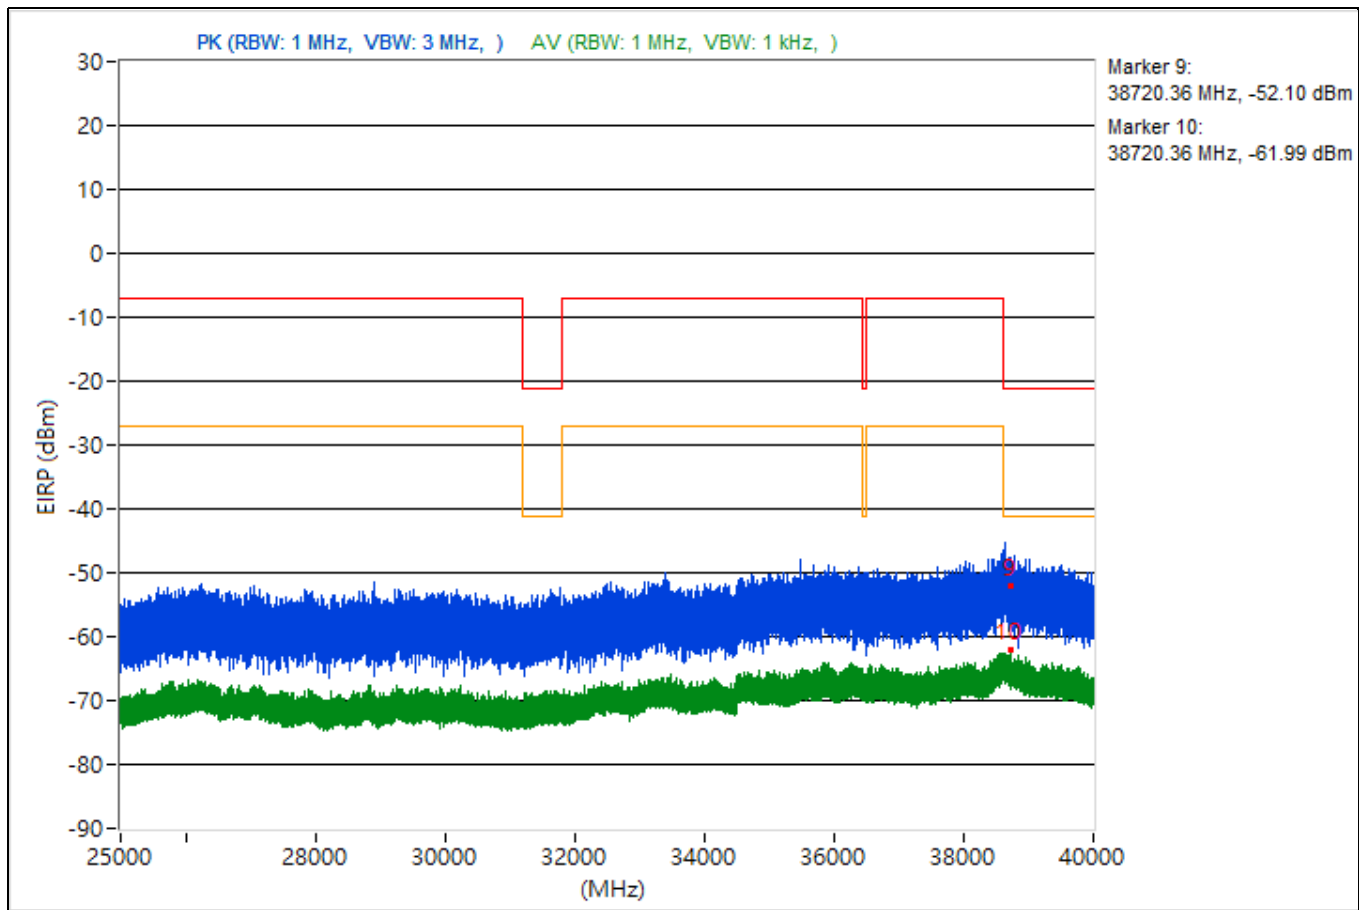


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3749.52	47.45 PK	74	-26.55	-52.73	4.92	-47.81
2	3749.52	36 AV	54	-18	-64.18	4.92	-59.26
3	14478.49	47.72 PK	74	-26.28	-52.46	4.92	-47.54
4	14478.49	34.88 AV	54	-19.12	-65.3	4.92	-60.38
5	19424.1	47.76 PK	74	-26.24	-52.42	4.92	-47.5
6	19424.1	36.6 AV	54	-17.4	-63.58	4.92	-58.66
7	23878.1	45.35 PK	74	-28.65	-54.83	4.92	-49.91
8	23878.1	37.44 AV	54	-16.56	-62.74	4.92	-57.82
9	38873.6	41.15 PK	74	-32.85	-59.03	4.92	-54.11
10	38873.6	33.47 AV	54	-20.53	-66.71	4.92	-61.79

Note: Margin value = Emission Level - Limit value

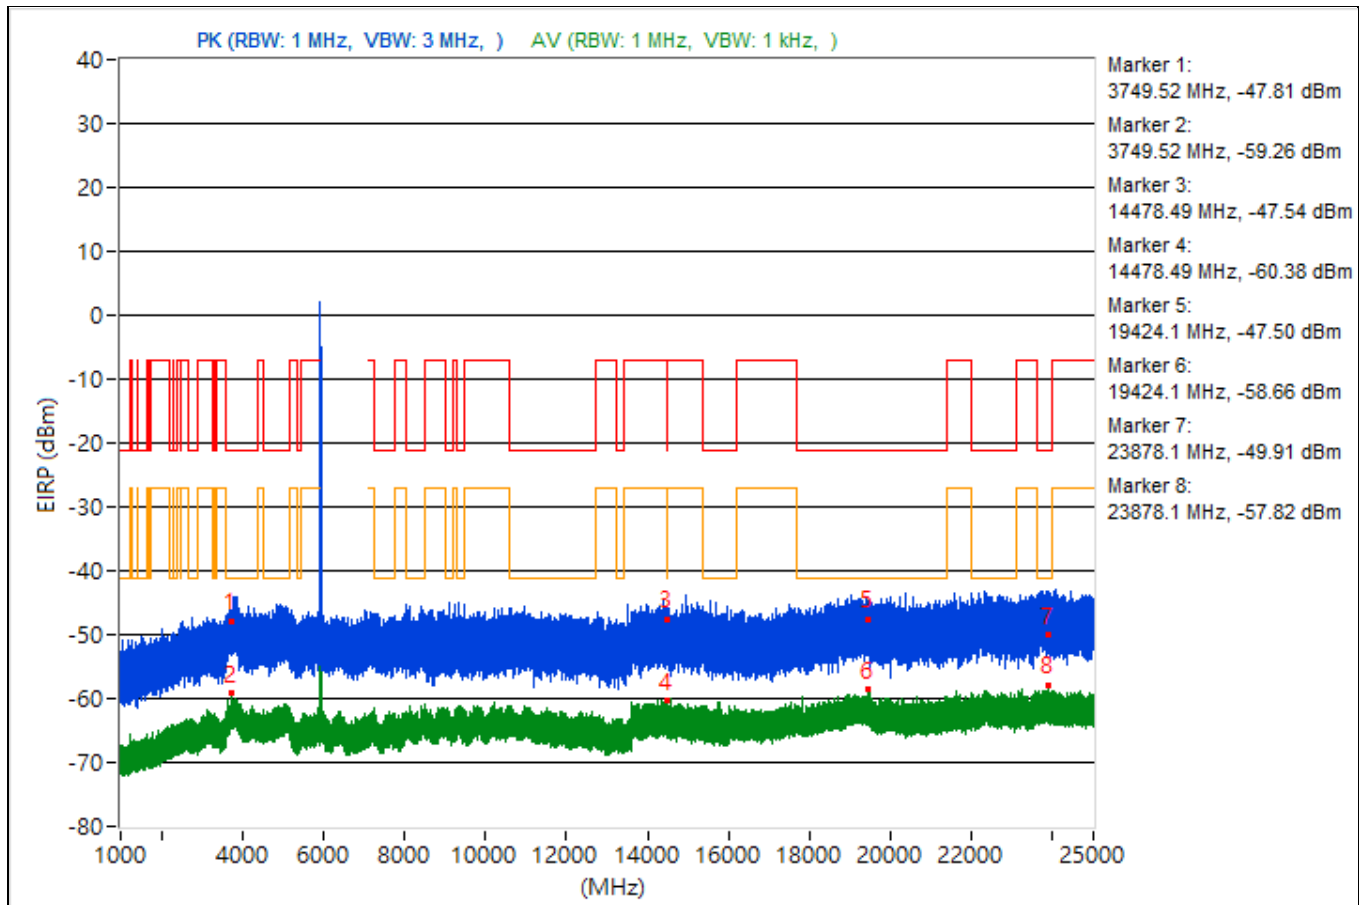


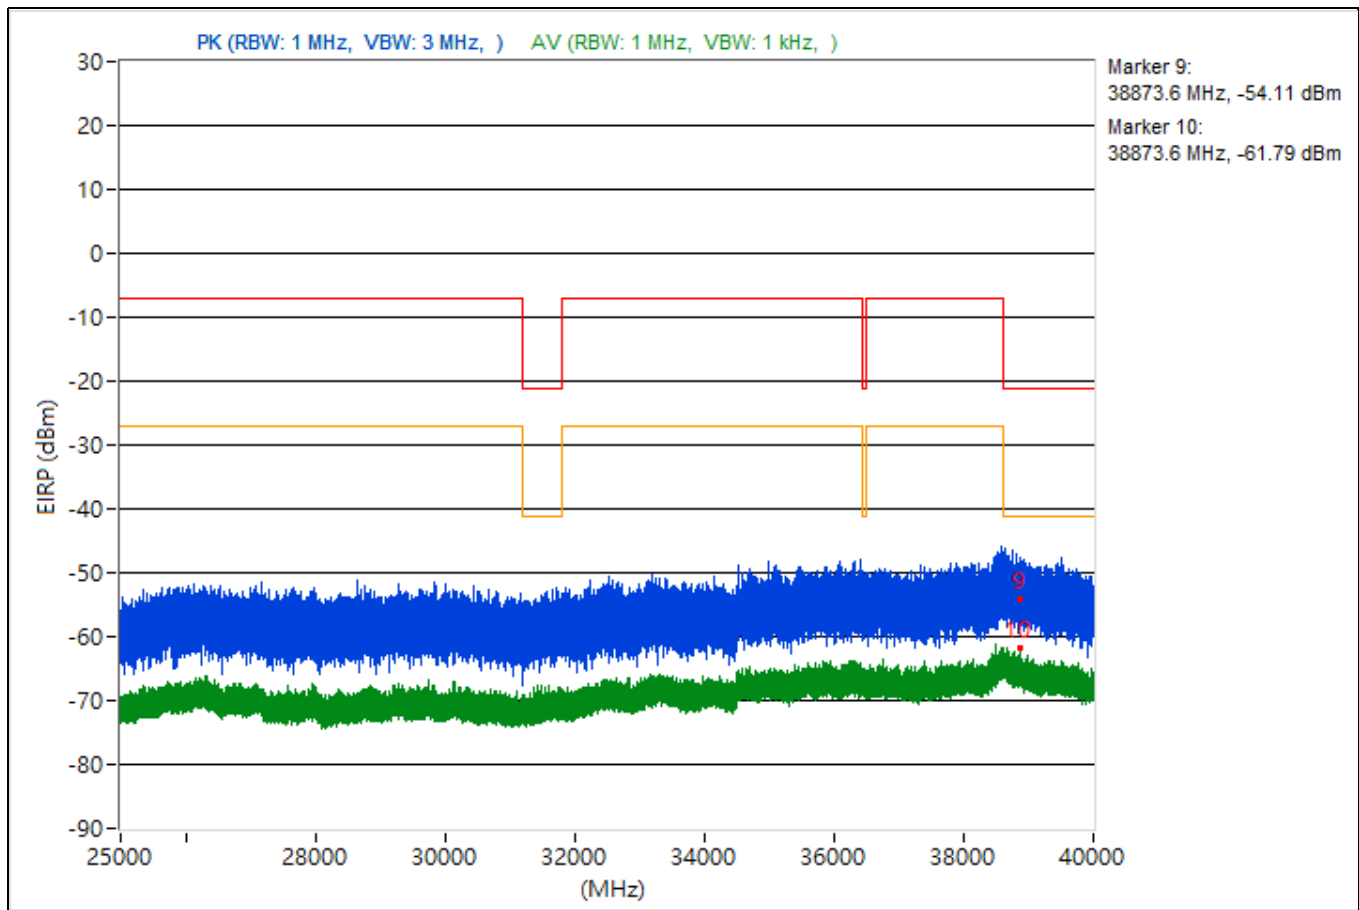


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5434.03	43.29 PK	74	-30.71	-56.89	4.92	-51.97
2	5434.03	35.97 AV	54	-18.03	-64.21	4.92	-59.29
3	11016	46.88 PK	74	-27.12	-53.3	4.92	-48.38
4	11016	35.17 AV	54	-18.83	-65.01	4.92	-60.09
5	19228.9	47.92 PK	74	-26.08	-52.26	4.92	-47.34
6	19228.9	37.14 AV	54	-16.86	-63.04	4.92	-58.12
7	22425.6	52.96 PK	74	-21.04	-47.22	4.92	-42.3
8	22425.6	36.84 AV	54	-17.16	-63.34	4.92	-58.42
9	38609.07	46.91 PK	74	-27.09	-53.27	4.92	-48.35
10	38609.07	33.12 AV	54	-20.88	-67.06	4.92	-62.14

Note: Margin value = Emission Level - Limit value

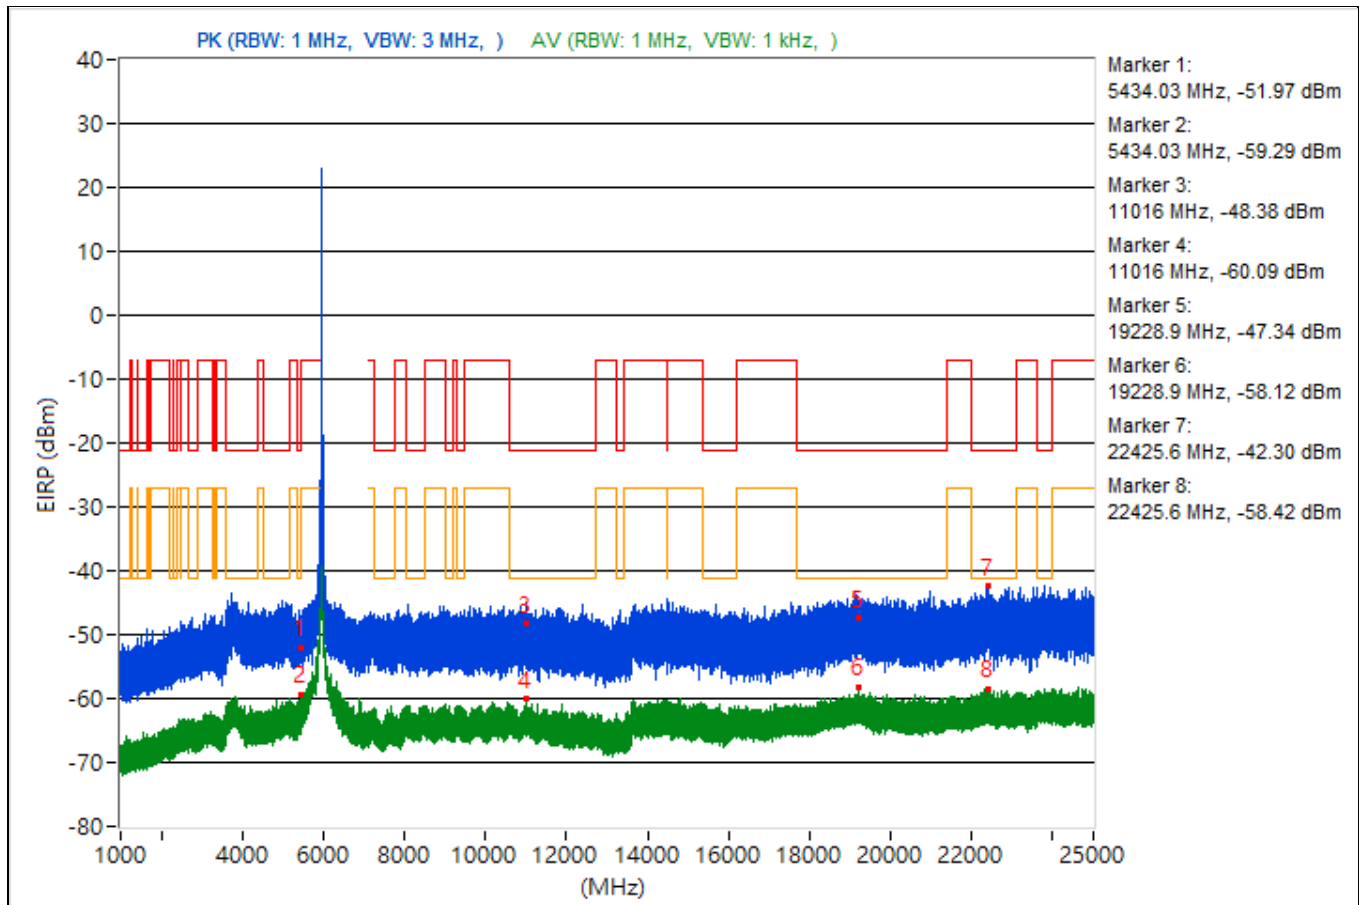


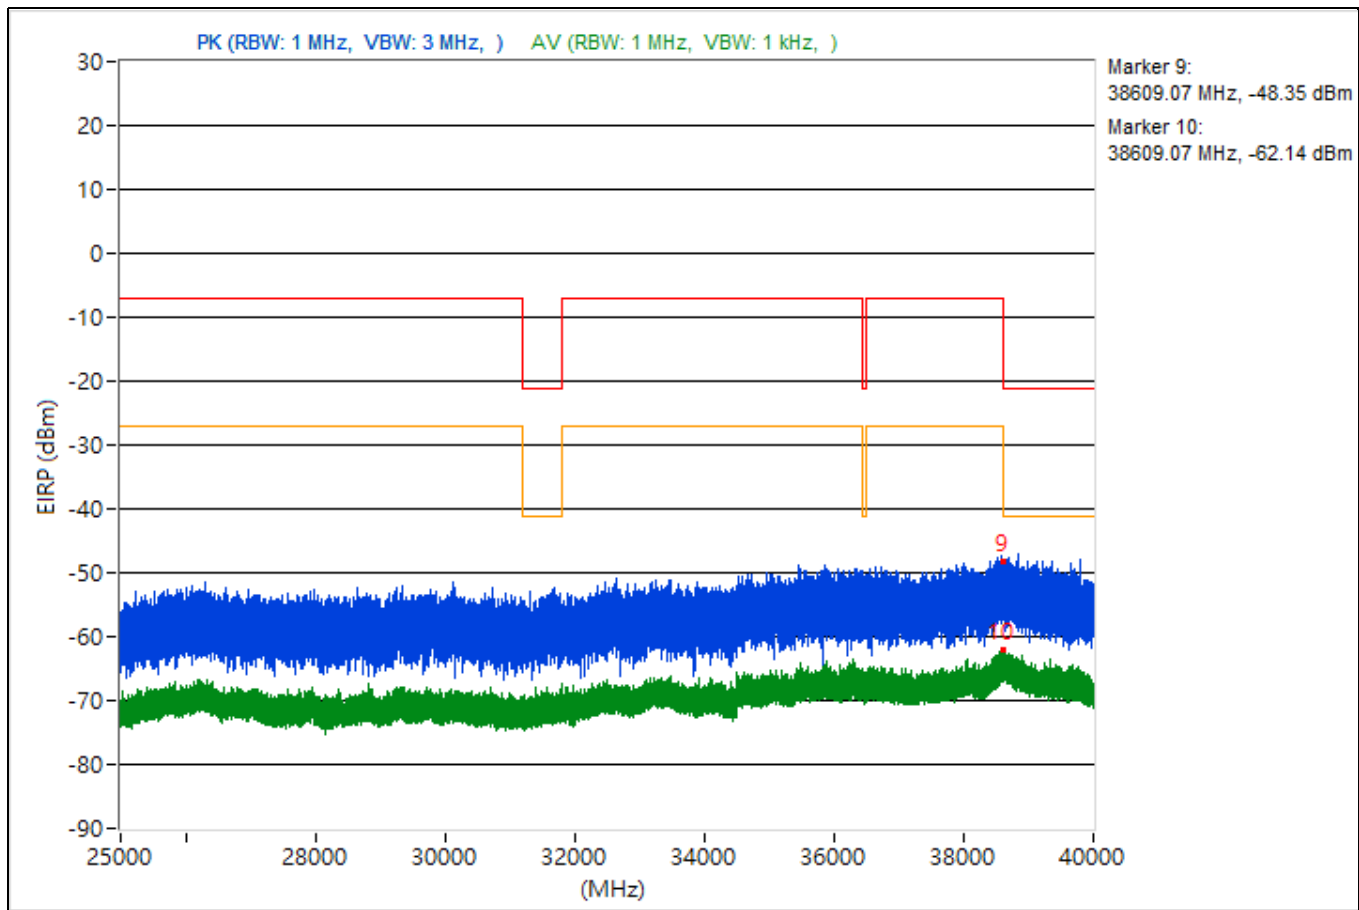


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.46	46.36 PK	74	-27.64	-53.82	4.92	-48.9
2	3771.46	35.59 AV	54	-18.41	-64.59	4.92	-59.67
3	8458.13	44.36 PK	74	-29.64	-55.82	4.92	-50.9
4	8458.13	34.94 AV	54	-19.06	-65.24	4.92	-60.32
5	19227	46.67 PK	74	-27.33	-53.51	4.92	-48.59
6	19227	36.44 AV	54	-17.56	-63.74	4.92	-58.82
7	23725.3	42.24 PK	74	-31.76	-57.94	4.92	-53.02
8	23725.3	36.96 AV	54	-17.04	-63.22	4.92	-58.3
9	38651.64	44 PK	74	-30	-56.18	4.92	-51.26
10	38651.64	33.25 AV	54	-20.75	-66.93	4.92	-62.01

Note: Margin value = Emission Level - Limit value

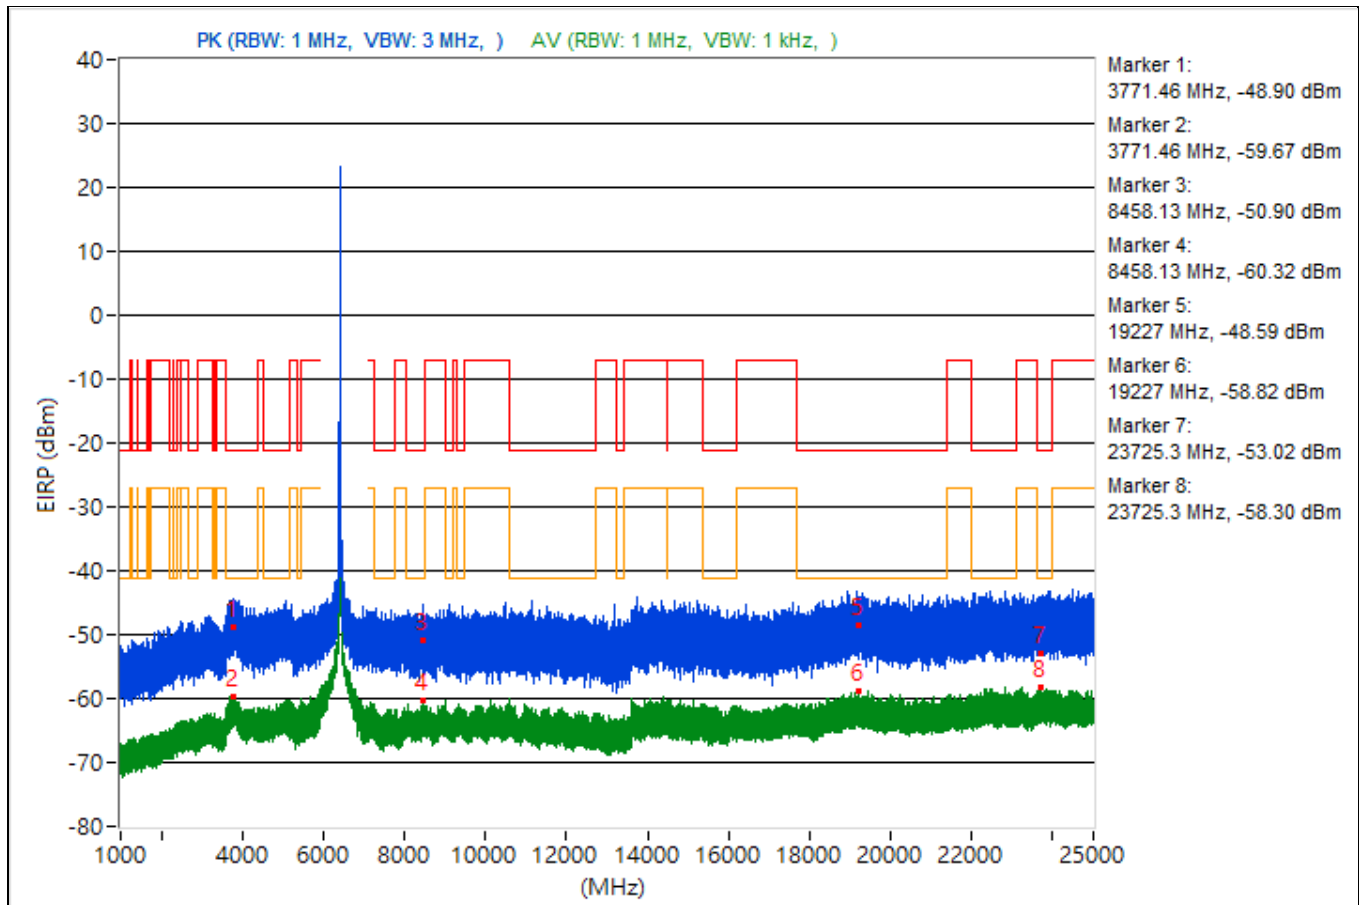


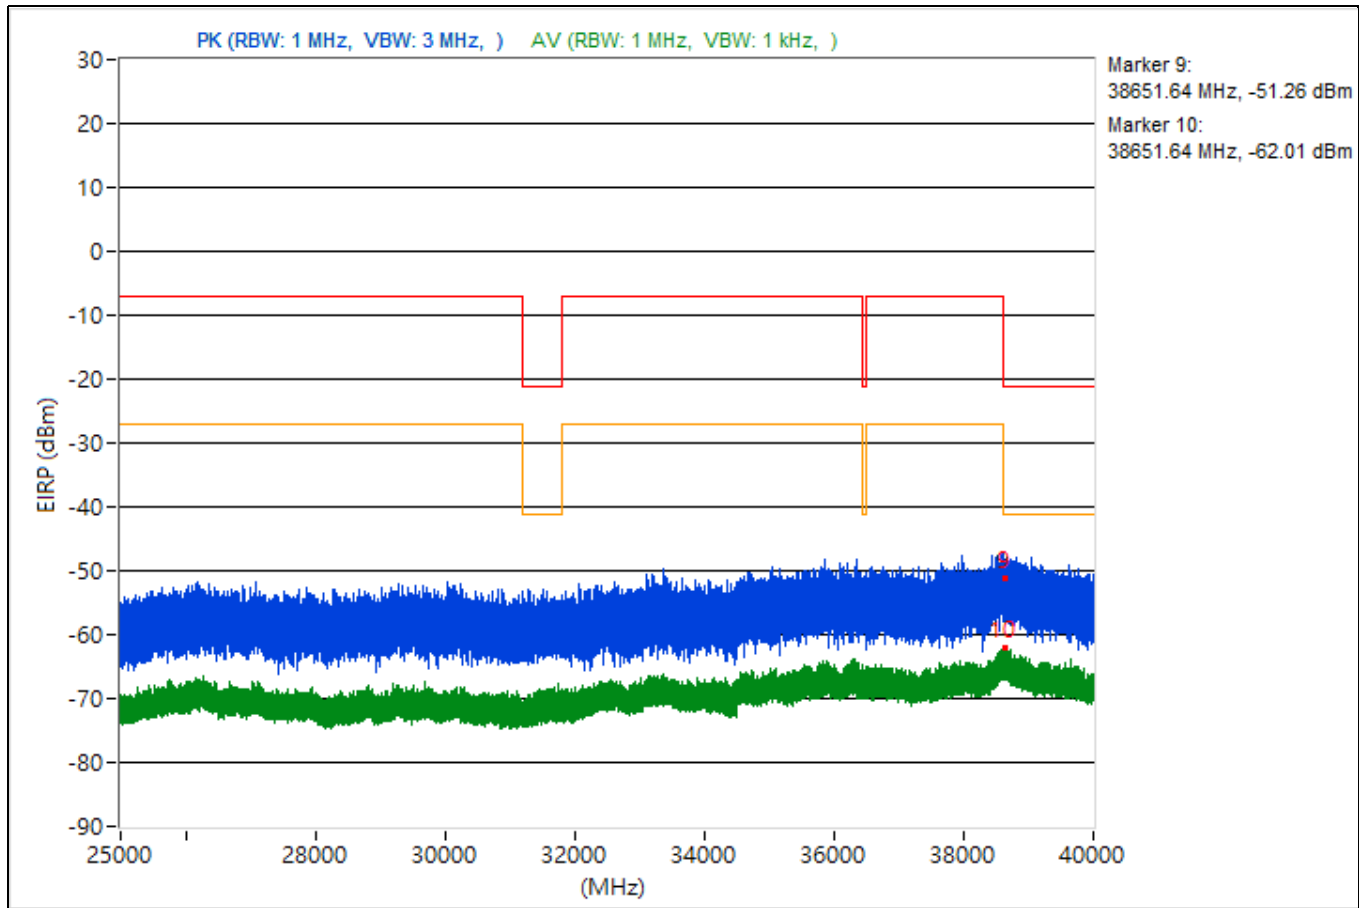


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3725.8	46.27 PK	74	-27.73	-53.91	4.92	-48.99
2	3725.8	35.86 AV	54	-18.14	-64.32	4.92	-59.4
3	8427.2	46.43 PK	74	-27.57	-53.75	4.92	-48.83
4	8427.2	35.07 AV	54	-18.93	-65.11	4.92	-60.19
5	19214.9	50.87 PK	74	-23.13	-49.31	4.92	-44.39
6	19214.9	36.58 AV	54	-17.42	-63.6	4.92	-58.68
7	22412	49.9 PK	74	-24.1	-50.28	4.92	-45.36
8	22412	37.05 AV	54	-16.95	-63.13	4.92	-58.21
9	38650.31	40.48 PK	74	-33.52	-59.7	4.92	-54.78
10	38650.31	33.3 AV	54	-20.7	-66.88	4.92	-61.96

Note: Margin value = Emission Level - Limit value

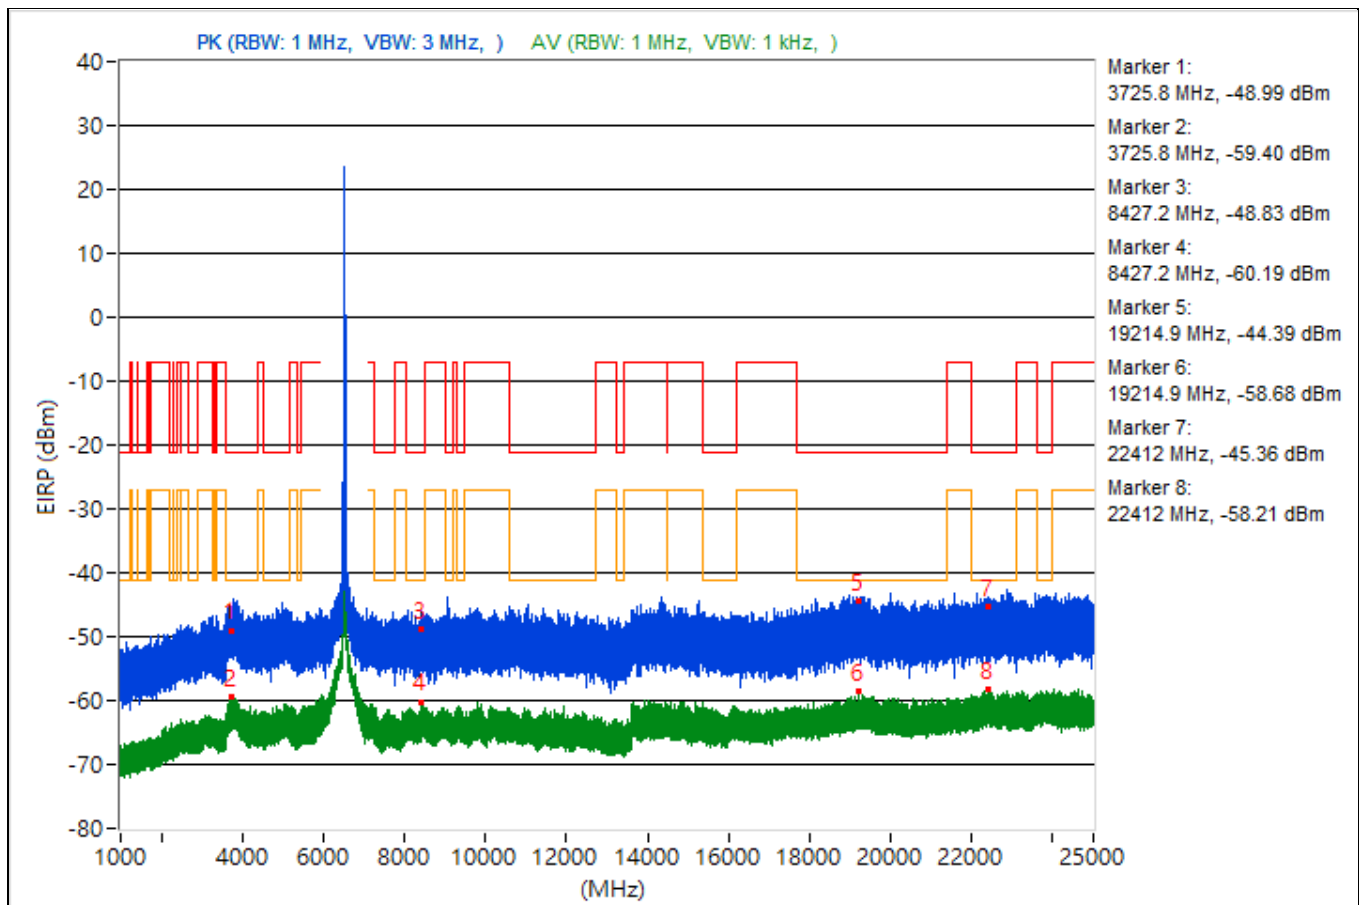


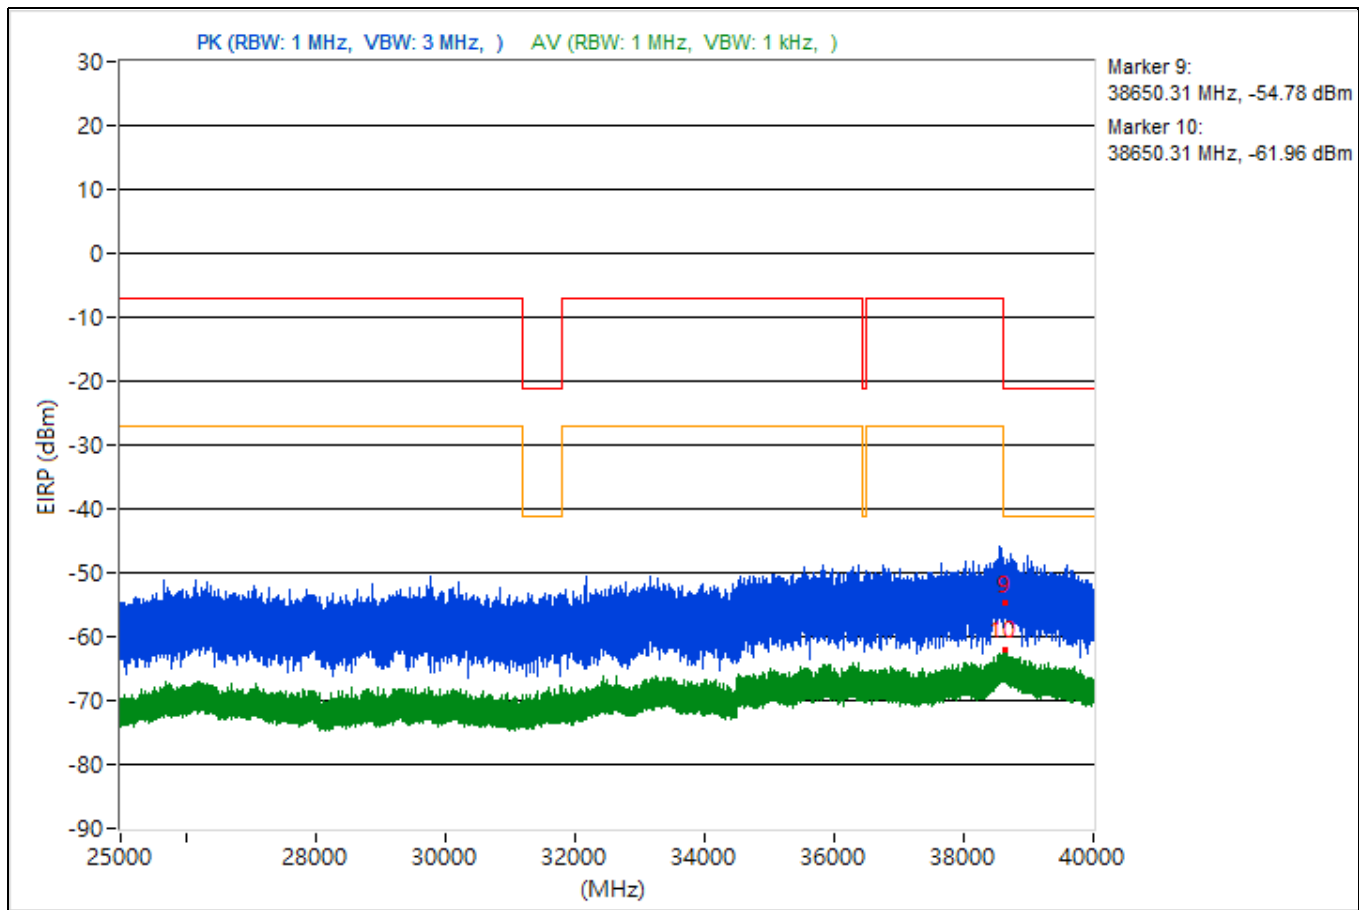


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3734.28	46.18 PK	74	-27.82	-54	4.92	-49.08
2	3734.28	35.81 AV	54	-18.19	-64.37	4.92	-59.45
3	14470.84	45.23 PK	74	-28.77	-54.95	4.92	-50.03
4	14470.84	35.48 AV	54	-18.52	-64.7	4.92	-59.78
5	20011.8	42.82 PK	74	-31.18	-57.36	4.92	-52.44
6	20011.8	36.56 AV	54	-17.44	-63.62	4.92	-58.7
7	22474	50.49 PK	74	-23.51	-49.69	4.92	-44.77
8	22474	37.46 AV	54	-16.54	-62.72	4.92	-57.8
9	38665.96	40.46 PK	74	-33.54	-59.72	4.92	-54.8
10	38665.96	33.61 AV	54	-20.39	-66.57	4.92	-61.65

Note: Margin value = Emission Level - Limit value

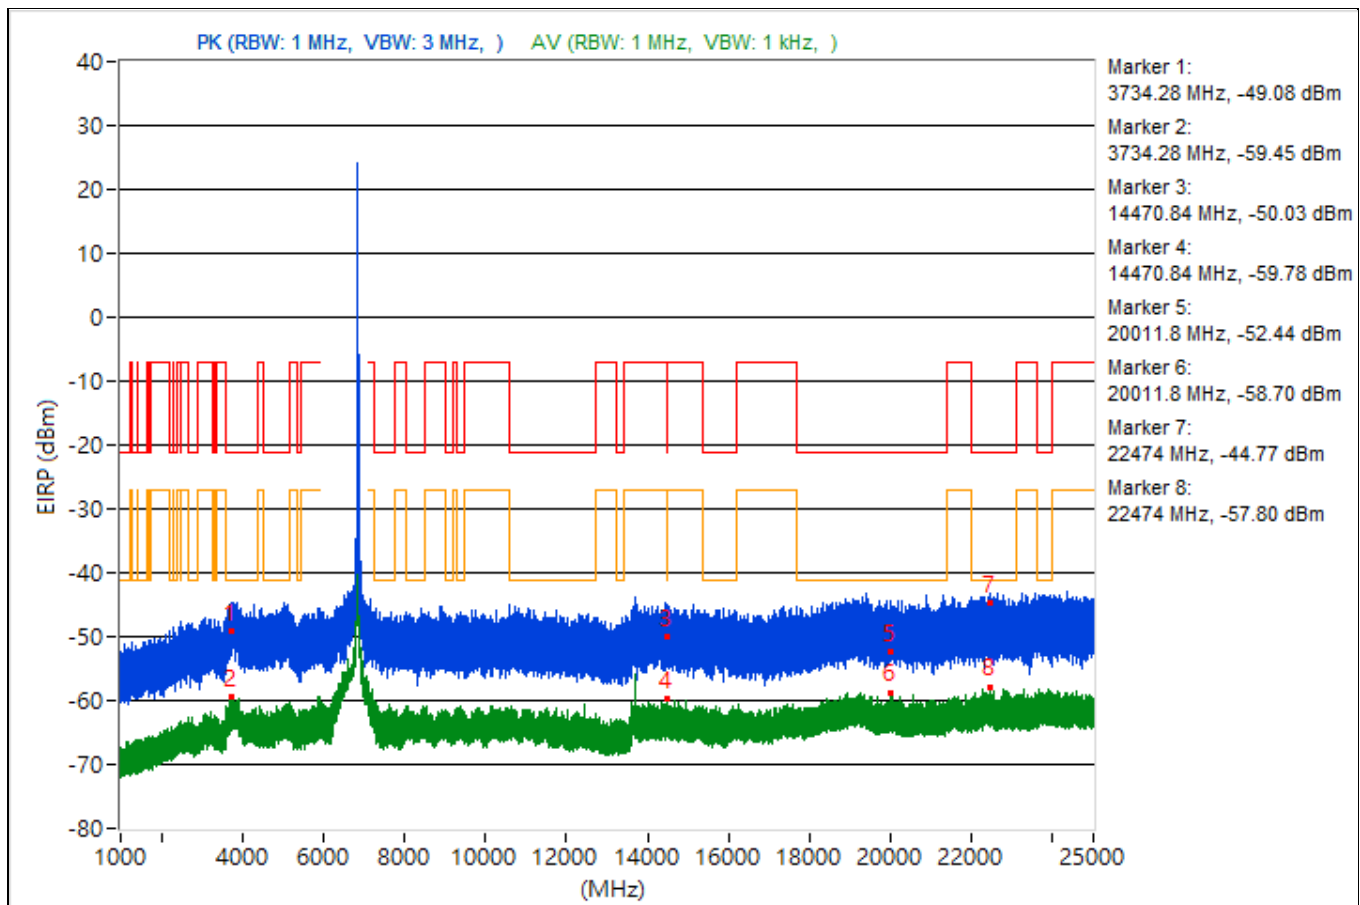


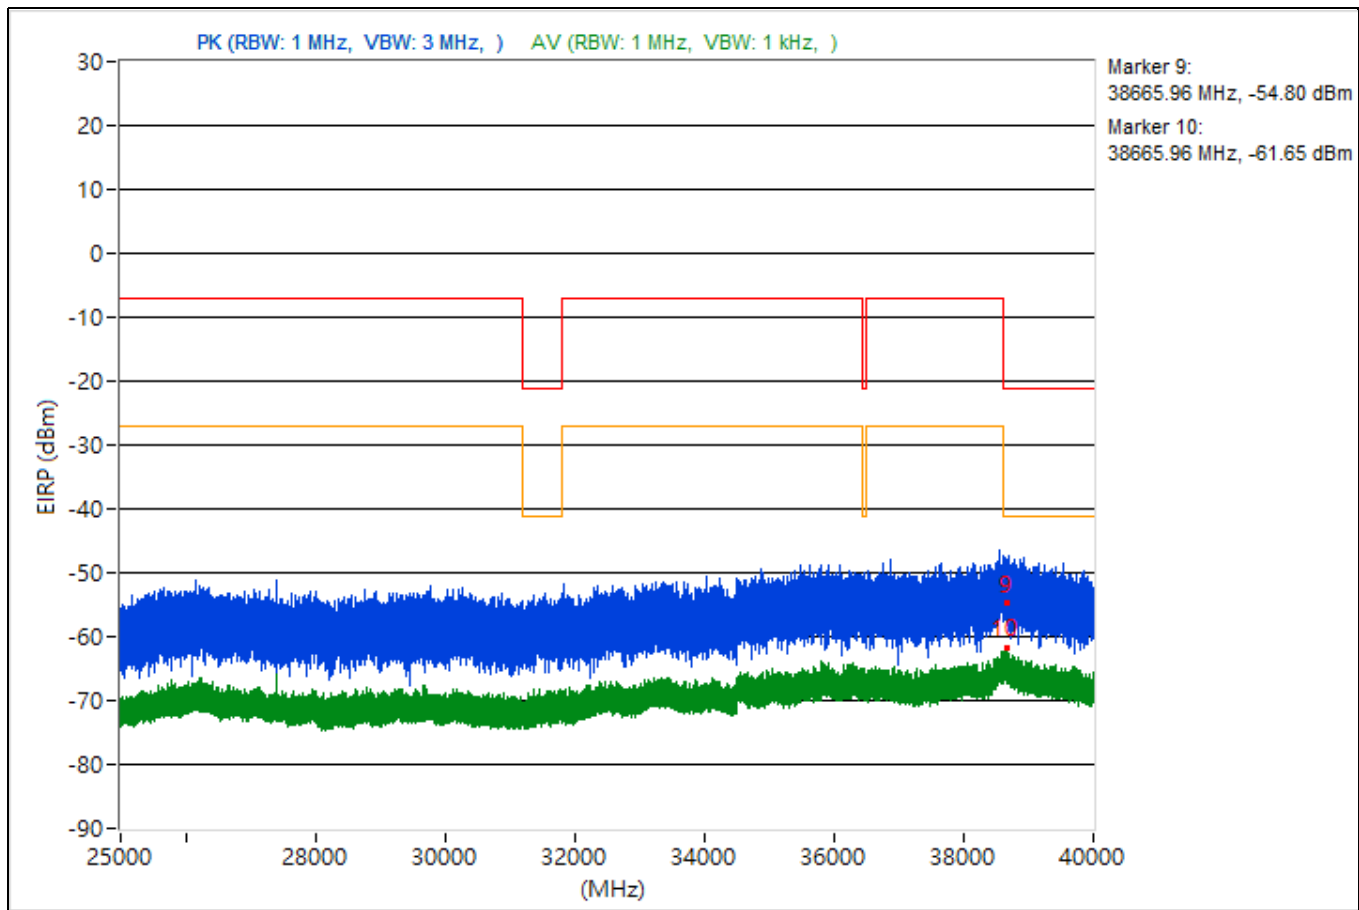


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3853.98	46.3 PK	74	-27.7	-53.88	4.92	-48.96
2	3853.98	36.15 AV	54	-17.85	-64.03	4.92	-59.11
3	14473.96	46.36 PK	74	-27.64	-53.82	4.92	-48.9
4	14473.96	34.67 AV	54	-19.33	-65.51	4.92	-60.59
5	19329.9	47.11 PK	74	-26.89	-53.07	4.92	-48.15
6	19329.9	36.57 AV	54	-17.43	-63.61	4.92	-58.69
7	22364.4	47.49 PK	74	-26.51	-52.69	4.92	-47.77
8	22364.4	36.89 AV	54	-17.11	-63.29	4.92	-58.37
9	38660.09	44.58 PK	74	-29.42	-55.6	4.92	-50.68
10	38660.09	33.45 AV	54	-20.55	-66.73	4.92	-61.81

Note: Margin value = Emission Level - Limit value

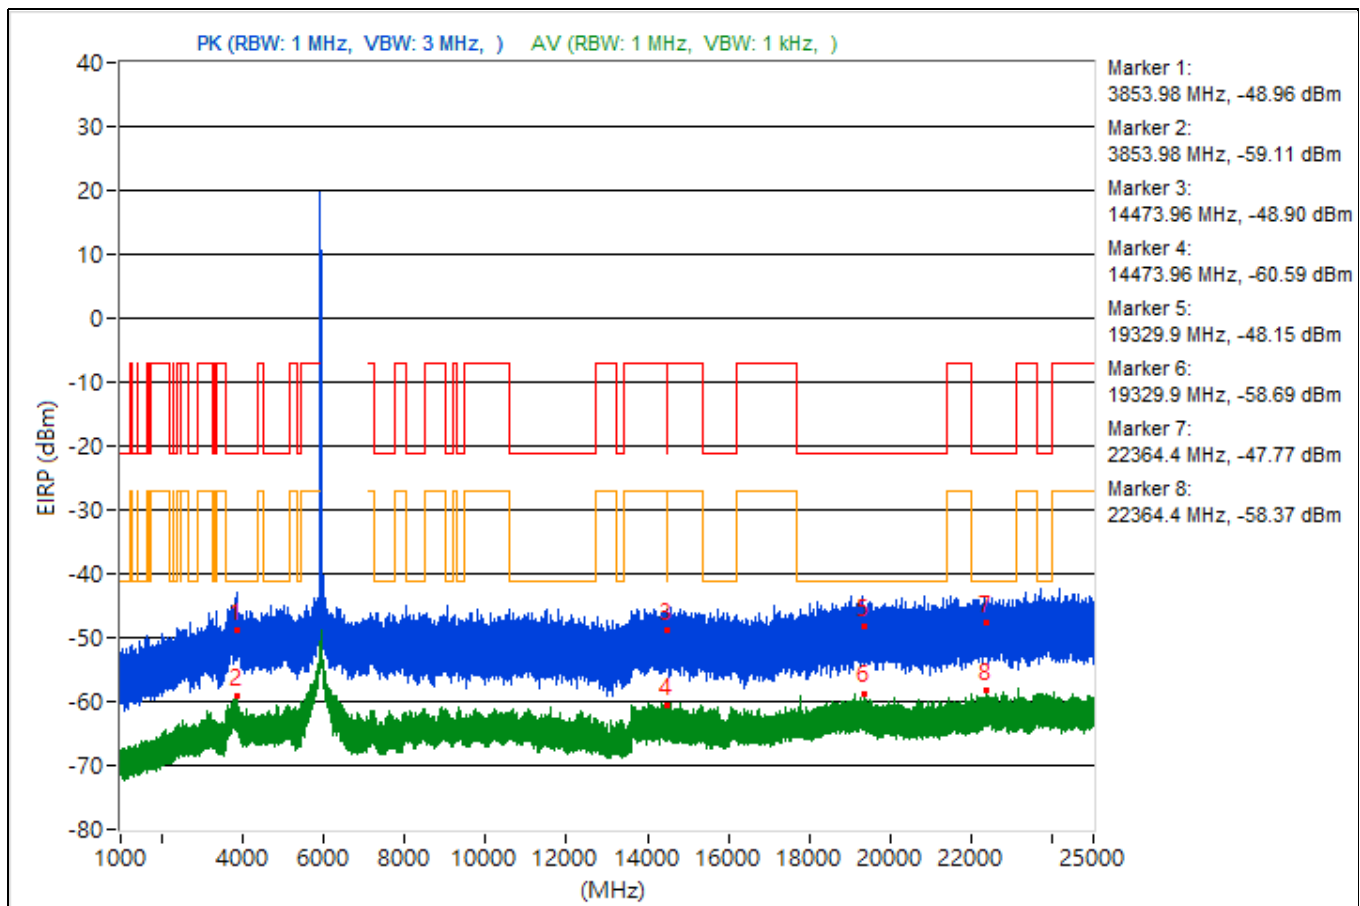


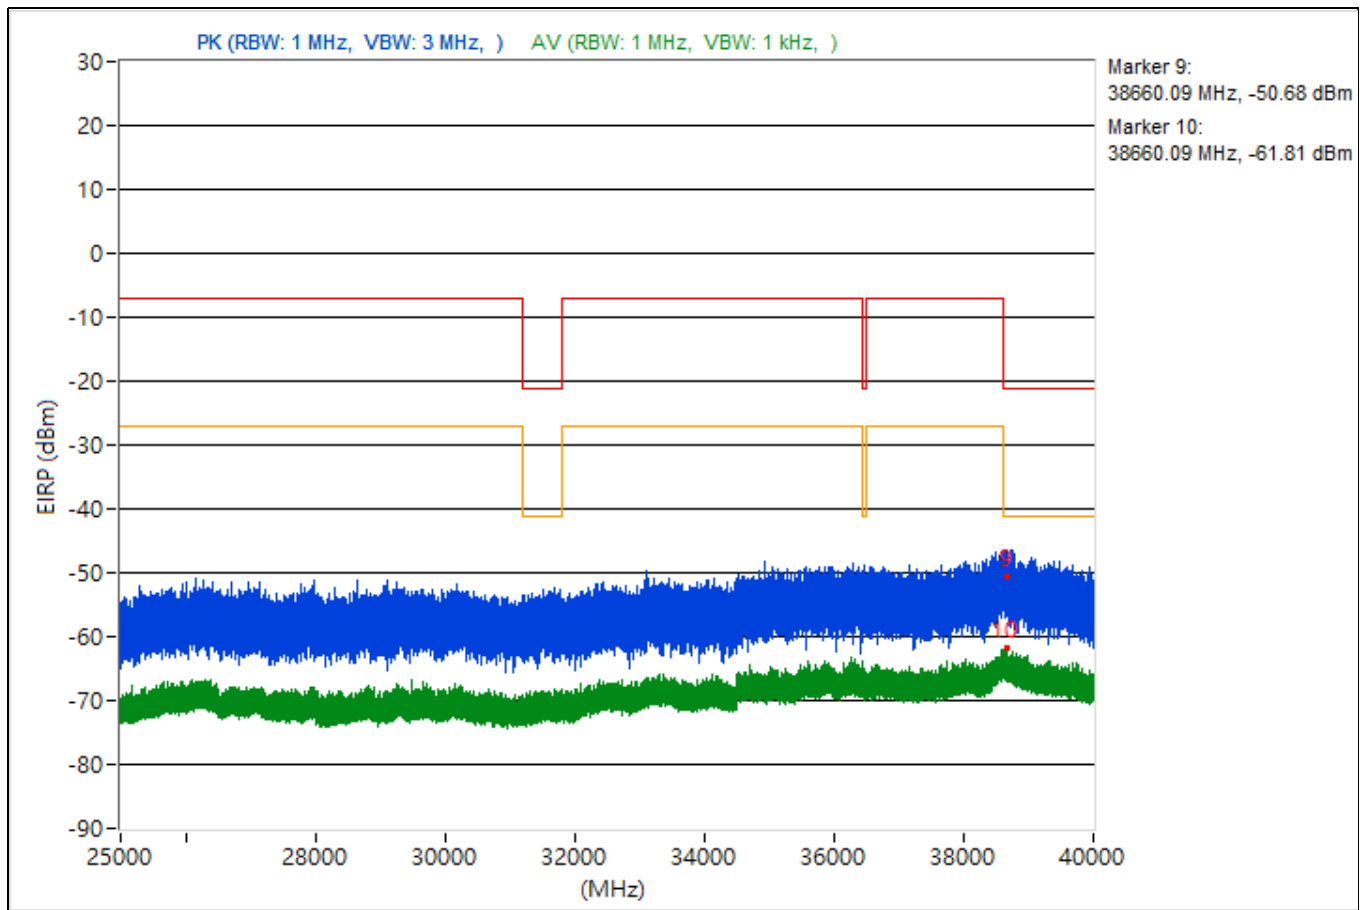


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3748.82	46.64 PK	74	-27.36	-53.54	4.92	-48.62
2	3748.82	36.42 AV	54	-17.58	-63.76	4.92	-58.84
3	11903.73	44.65 PK	74	-29.35	-55.53	4.92	-50.61
4	11903.73	35.05 AV	54	-18.95	-65.13	4.92	-60.21
5	19375.4	47.79 PK	74	-26.21	-52.39	4.92	-47.47
6	19375.4	36.42 AV	54	-17.58	-63.76	4.92	-58.84
7	23632.1	49.82 PK	74	-24.18	-50.36	4.92	-45.44
8	23632.1	37.41 AV	54	-16.59	-62.77	4.92	-57.85
9	38619.64	44.8 PK	74	-29.2	-55.38	4.92	-50.46
10	38619.64	33.17 AV	54	-20.83	-67.01	4.92	-62.09

Note: Margin value = Emission Level - Limit value

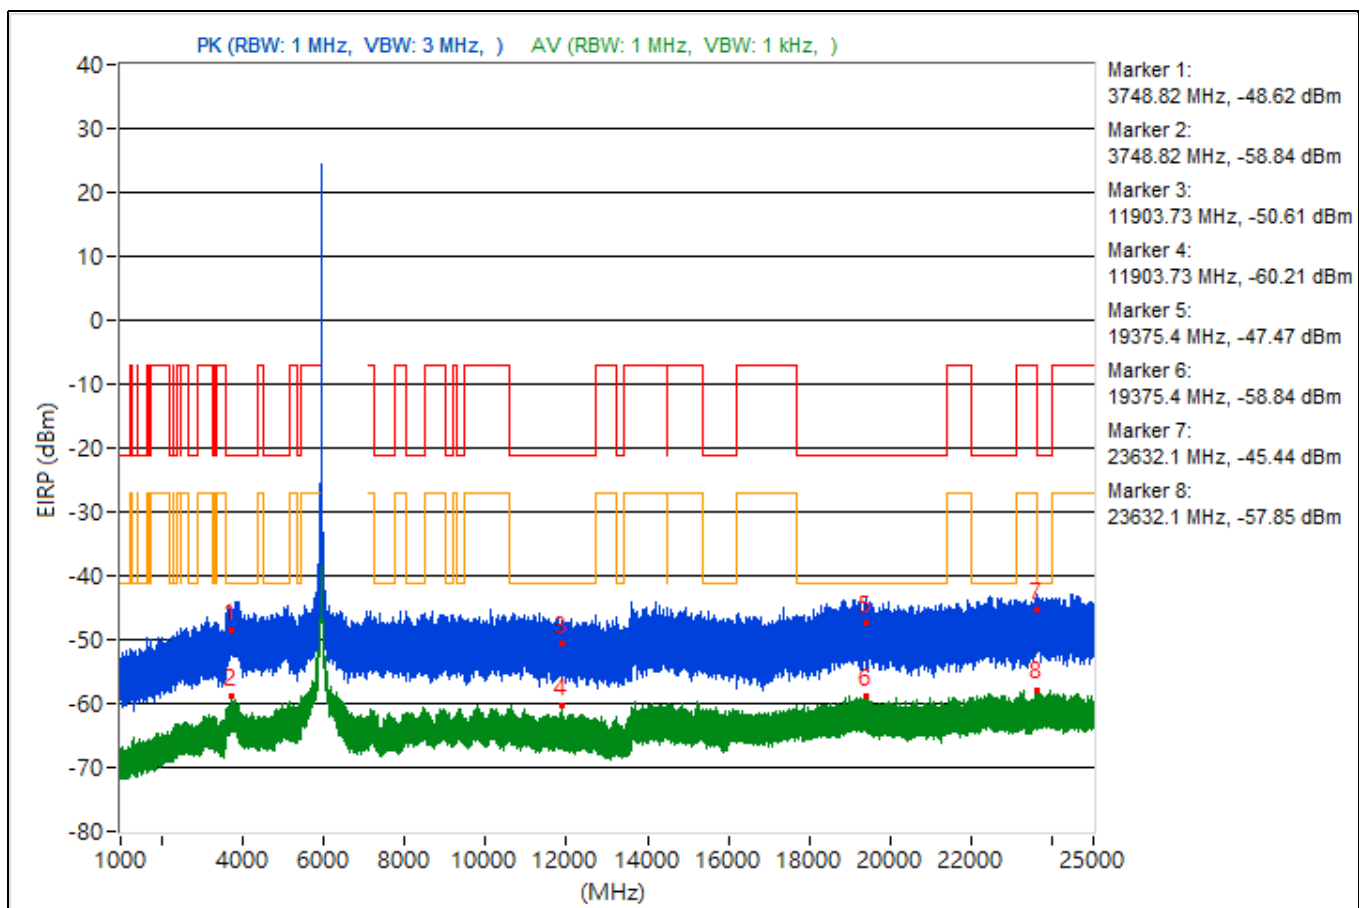


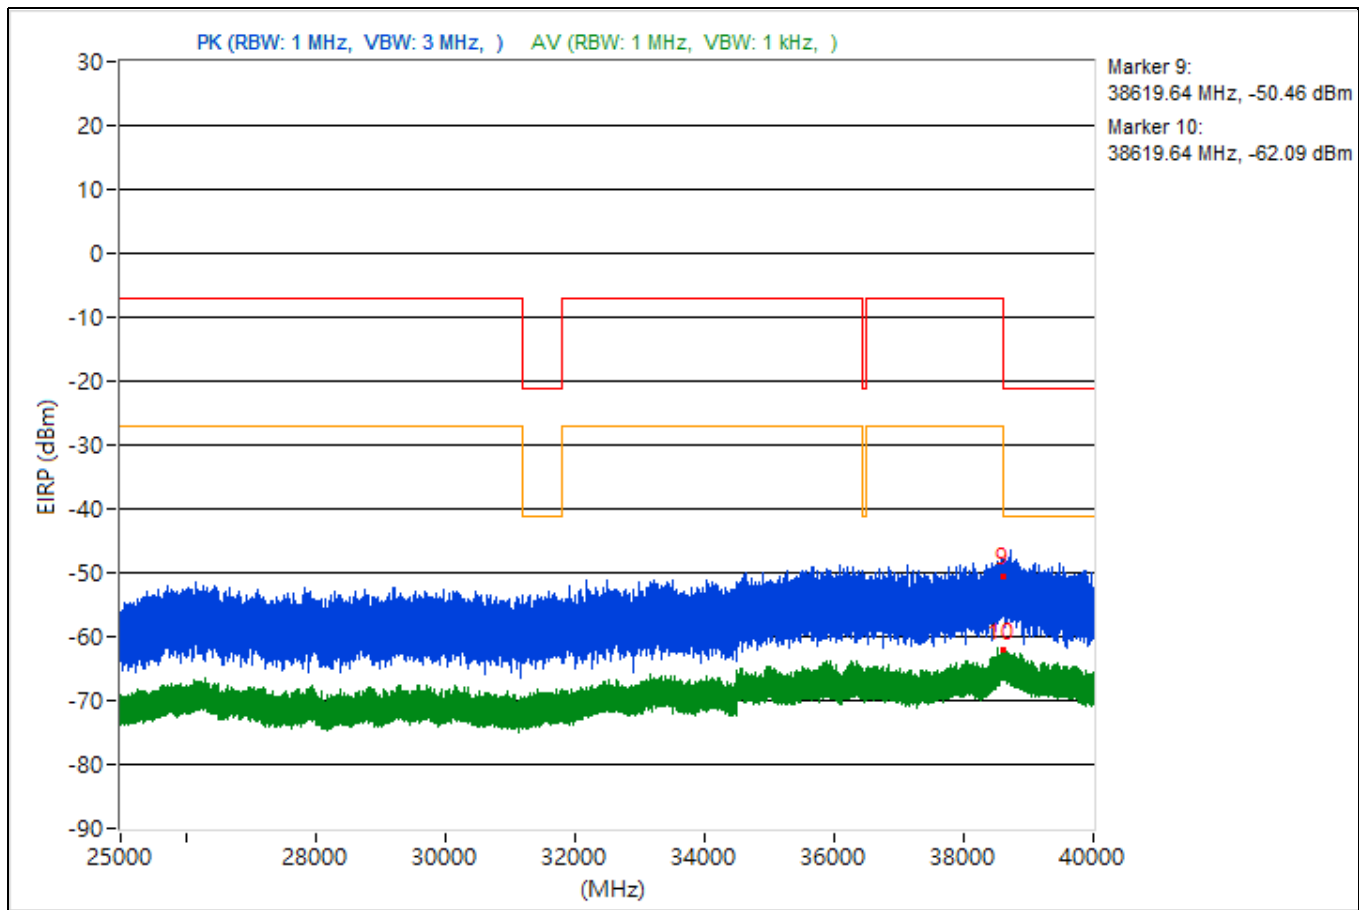


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3826.99	45.98 PK	74	-28.02	-54.2	4.92	-49.28
2	3826.99	35.78 AV	54	-18.22	-64.4	4.92	-59.48
3	14488.44	42.69 PK	74	-31.31	-57.49	4.92	-52.57
4	14488.44	34.99 AV	54	-19.01	-65.19	4.92	-60.27
5	18985.1	44.52 PK	74	-29.48	-55.66	4.92	-50.74
6	18985.1	36.8 AV	54	-17.2	-63.38	4.92	-58.46
7	23875.3	43.67 PK	74	-30.33	-56.51	4.92	-51.59
8	23875.3	37.59 AV	54	-16.41	-62.59	4.92	-57.67
9	38745.6	43.25 PK	74	-30.75	-56.93	4.92	-52.01
10	38745.6	32.55 AV	54	-21.45	-67.63	4.92	-62.71

Note: Margin value = Emission Level - Limit value

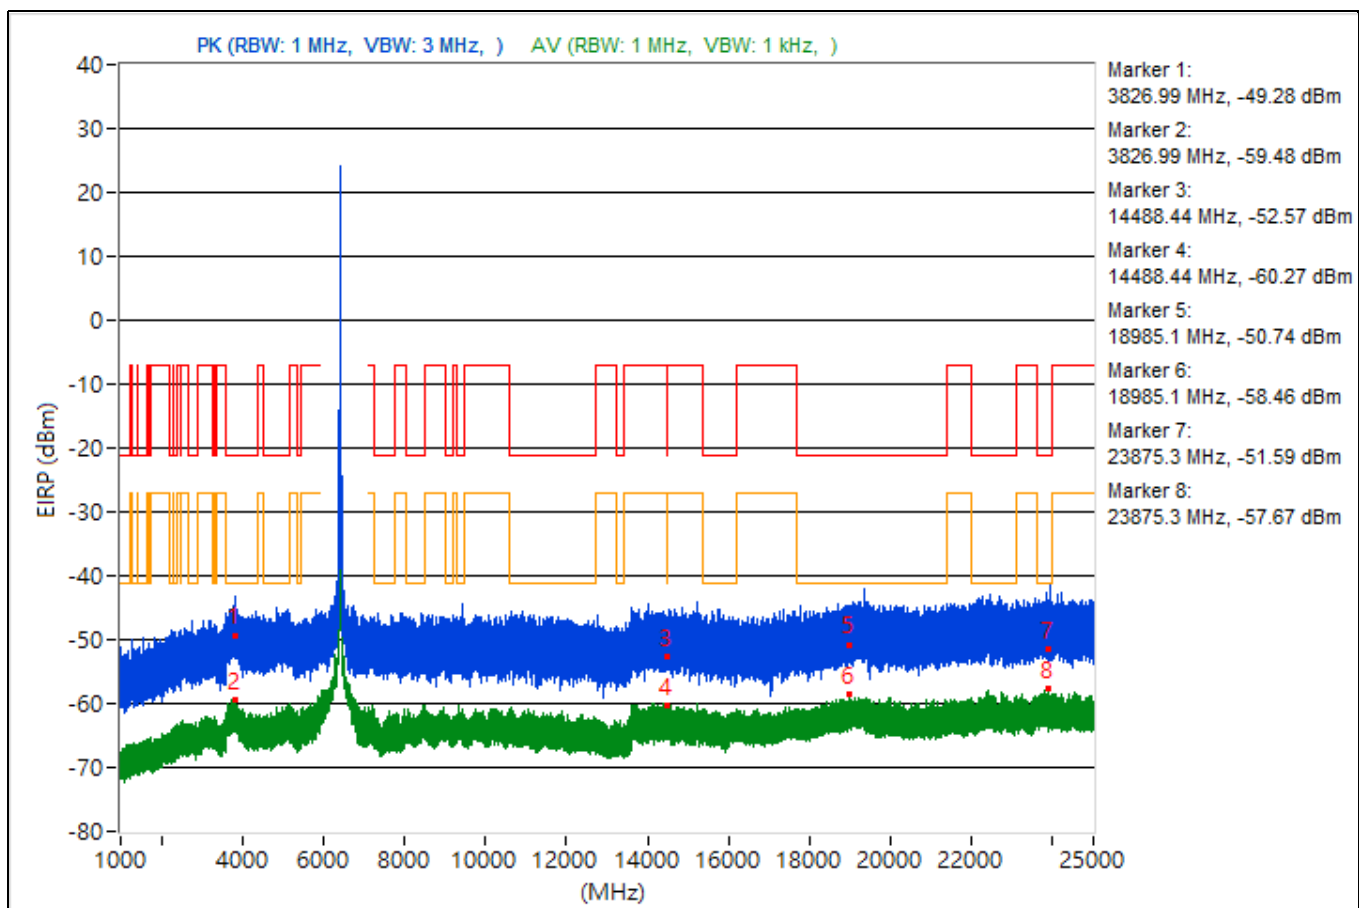


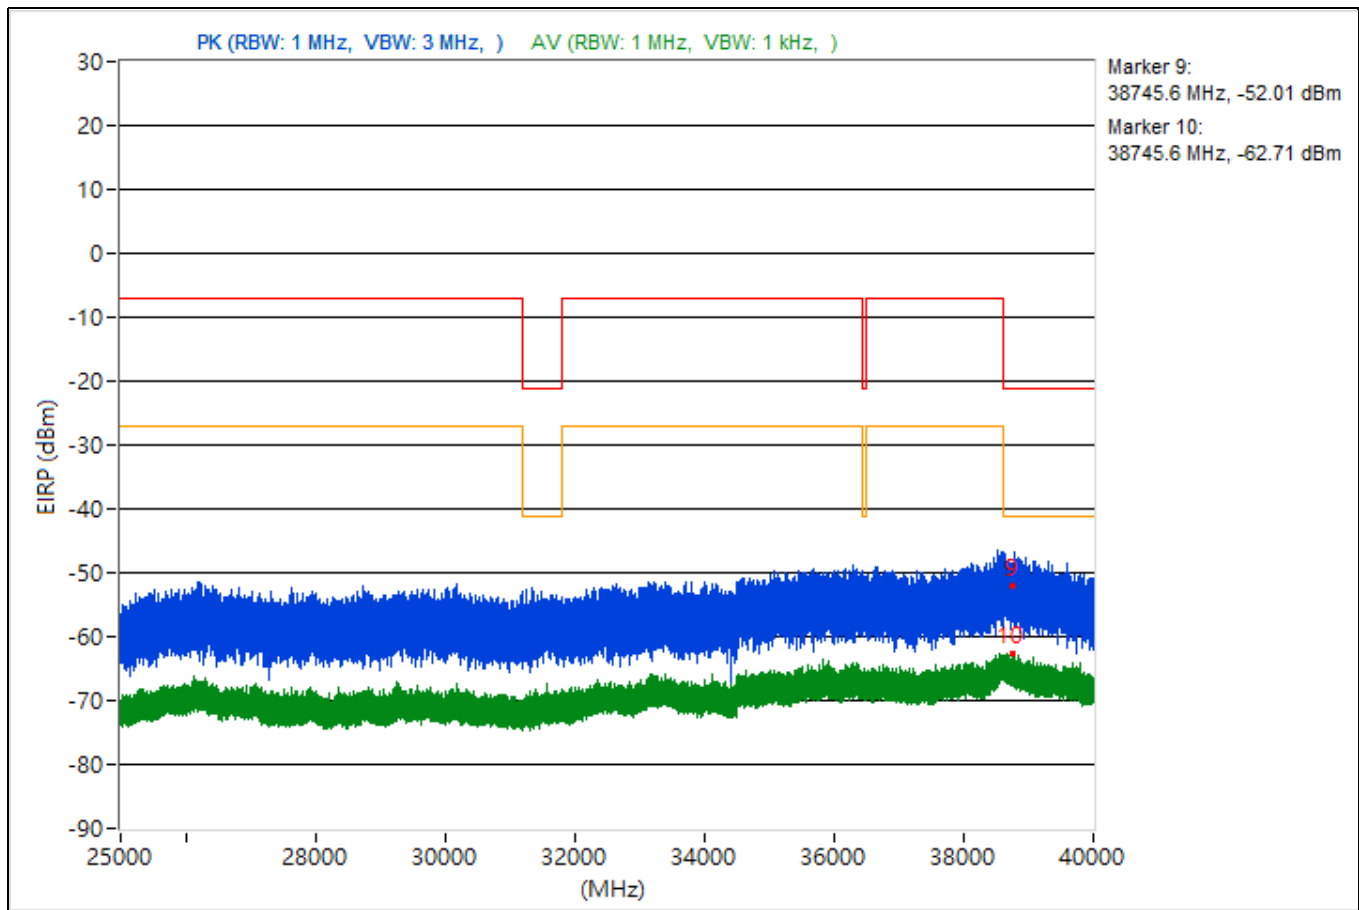


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.74	47.42 PK	74	-26.58	-52.76	4.92	-47.84
2	3790.74	35.87 AV	54	-18.13	-64.31	4.92	-59.39
3	9303.2	44.06 PK	74	-29.94	-56.12	4.92	-51.2
4	9303.2	34.81 AV	54	-19.19	-65.37	4.92	-60.45
5	19162.5	47.05 PK	74	-26.95	-53.13	4.92	-48.21
6	19162.5	36.86 AV	54	-17.14	-63.32	4.92	-58.4
7	23838.2	47.01 PK	74	-26.99	-53.17	4.92	-48.25
8	23838.2	37.09 AV	54	-16.91	-63.09	4.92	-58.17
9	38682.22	41.66 PK	74	-32.34	-58.52	4.92	-53.6
10	38682.22	33.25 AV	54	-20.75	-66.93	4.92	-62.01

Note: Margin value = Emission Level - Limit value

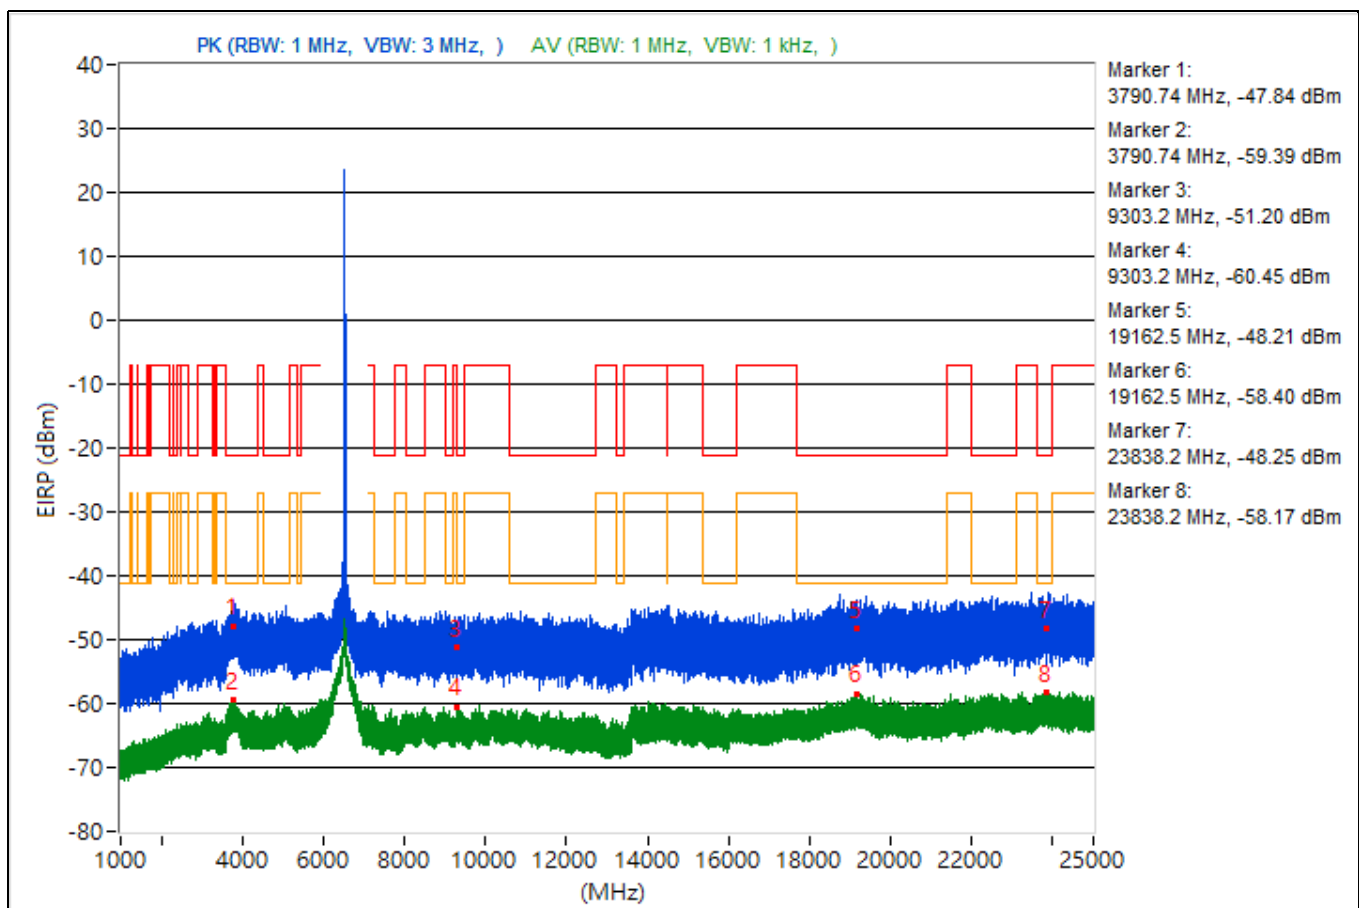


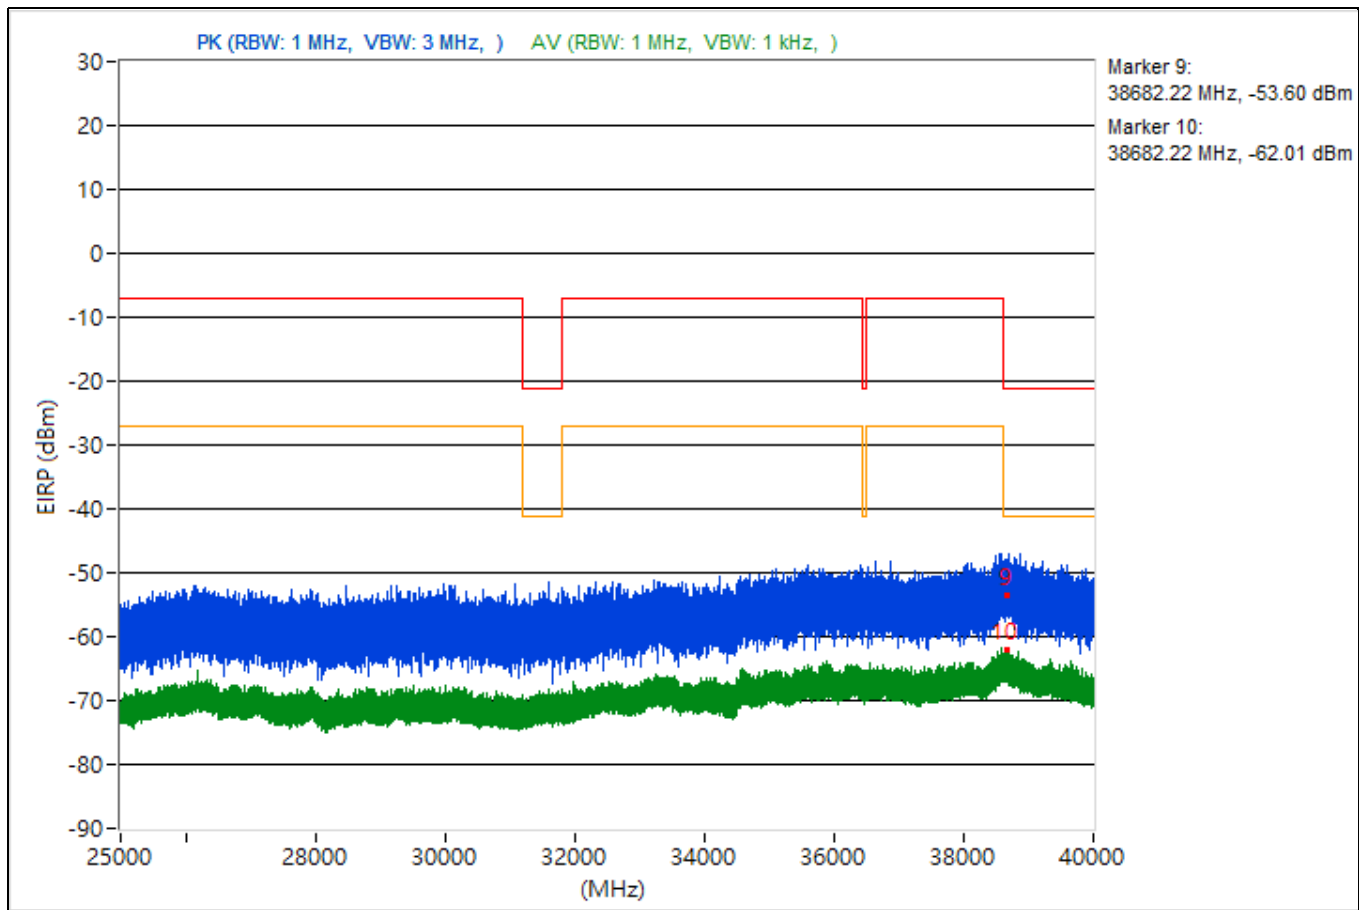


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.47	47.49 PK	74	-26.51	-52.69	4.92	-47.77
2	3842.47	35.93 AV	54	-18.07	-64.25	4.92	-59.33
3	7252.56	45.49 PK	74	-28.51	-54.69	4.92	-49.77
4	7252.56	35.45 AV	54	-18.55	-64.73	4.92	-59.81
5	19496.1	47.9 PK	74	-26.1	-52.28	4.92	-47.36
6	19496.1	36.57 AV	54	-17.43	-63.61	4.92	-58.69
7	23669.6	47.54 PK	74	-26.46	-52.64	4.92	-47.72
8	23669.6	37.52 AV	54	-16.48	-62.66	4.92	-57.74
9	38680.36	42.42 PK	74	-31.58	-57.76	4.92	-52.84
10	38680.36	32.95 AV	54	-21.05	-67.23	4.92	-62.31

Note: Margin value = Emission Level - Limit value

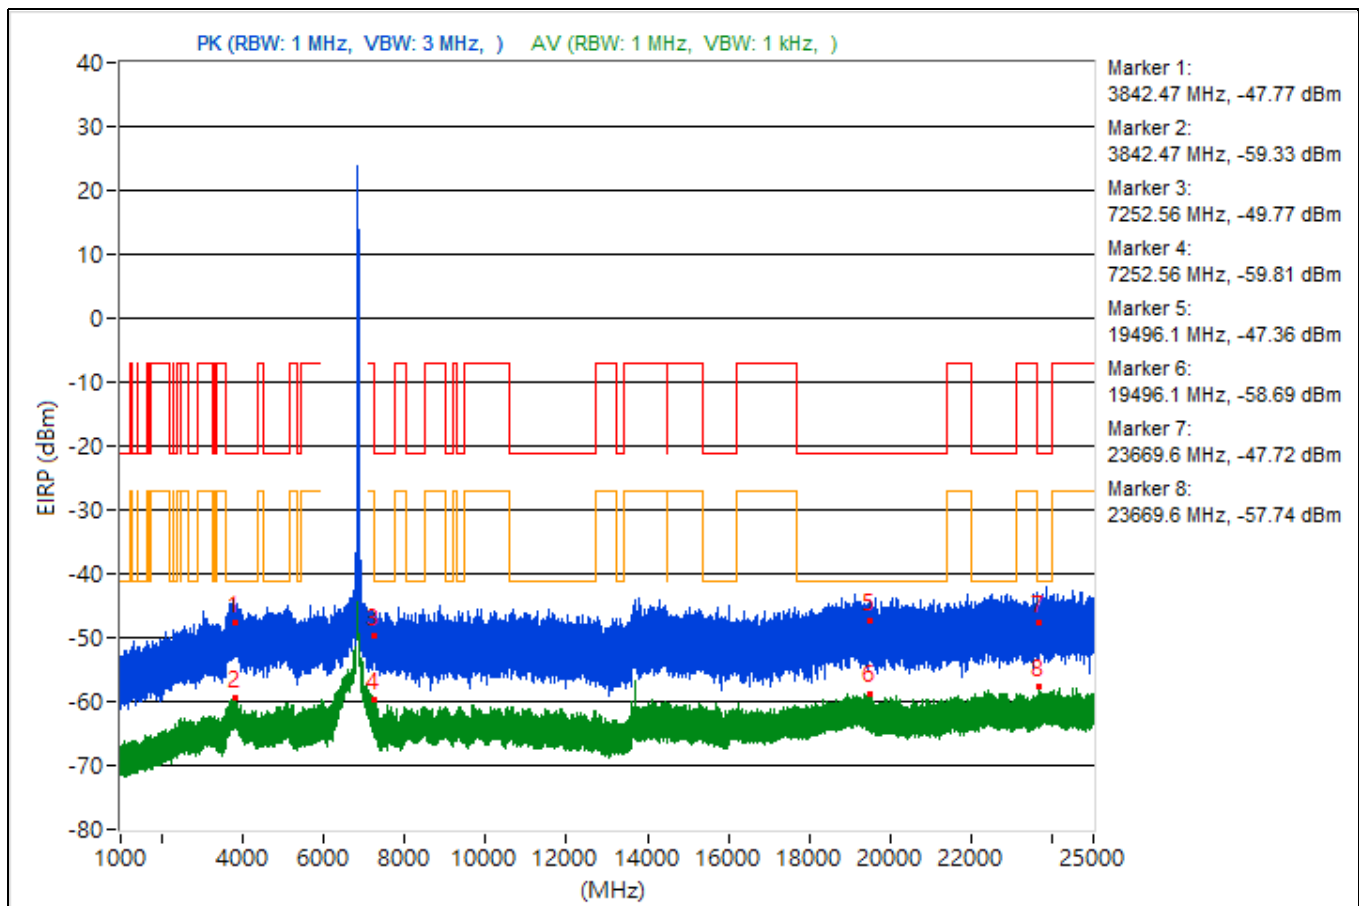


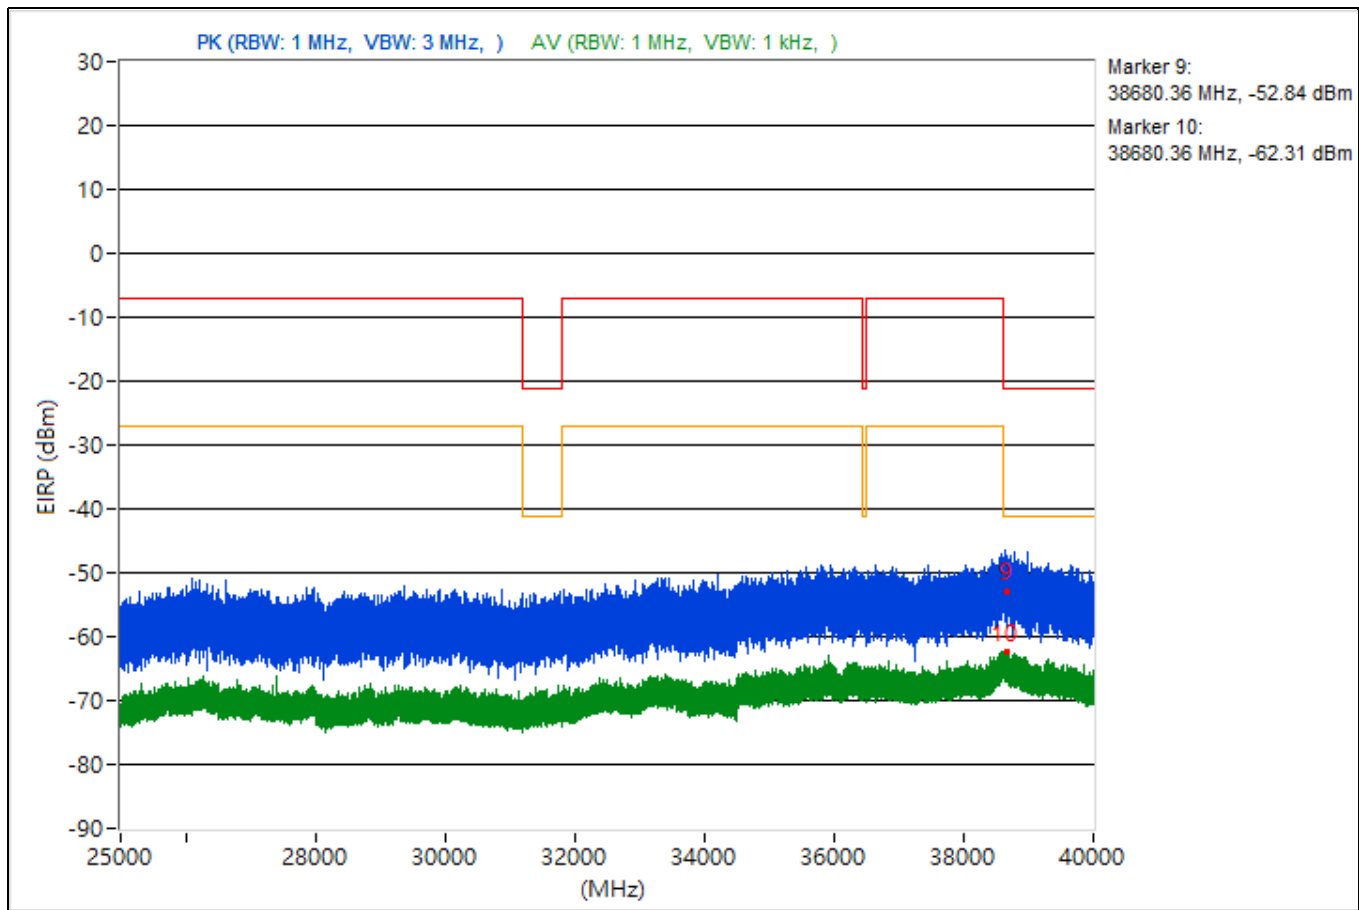


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.21	46.35 PK	74	-27.65	-53.83	4.92	-48.91
2	3791.21	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	9368.71	44.62 PK	74	-29.38	-55.56	4.92	-50.64
4	9368.71	34.85 AV	54	-19.15	-65.33	4.92	-60.41
5	19344.6	46.04 PK	74	-27.96	-54.14	4.92	-49.22
6	19344.6	35.97 AV	54	-18.03	-64.21	4.92	-59.29
7	23813.7	45.22 PK	74	-28.78	-54.96	4.92	-50.04
8	23813.7	36.7 AV	54	-17.3	-63.48	4.92	-58.56
9	38603.29	44.29 PK	74	-29.71	-55.89	4.92	-50.97
10	38603.29	33.29 AV	54	-20.71	-66.89	4.92	-61.97

Note: Margin value = Emission Level - Limit value

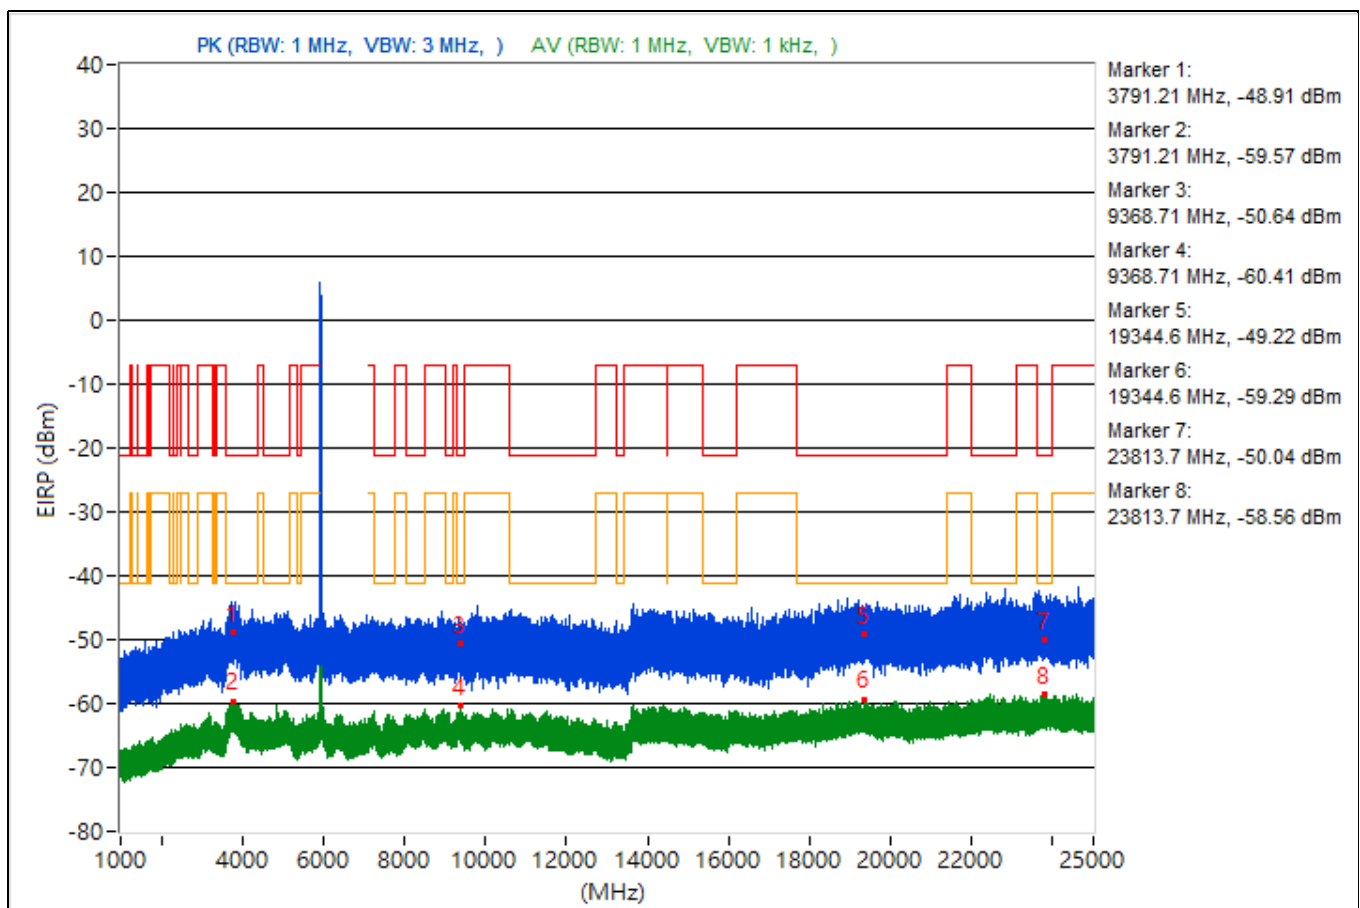


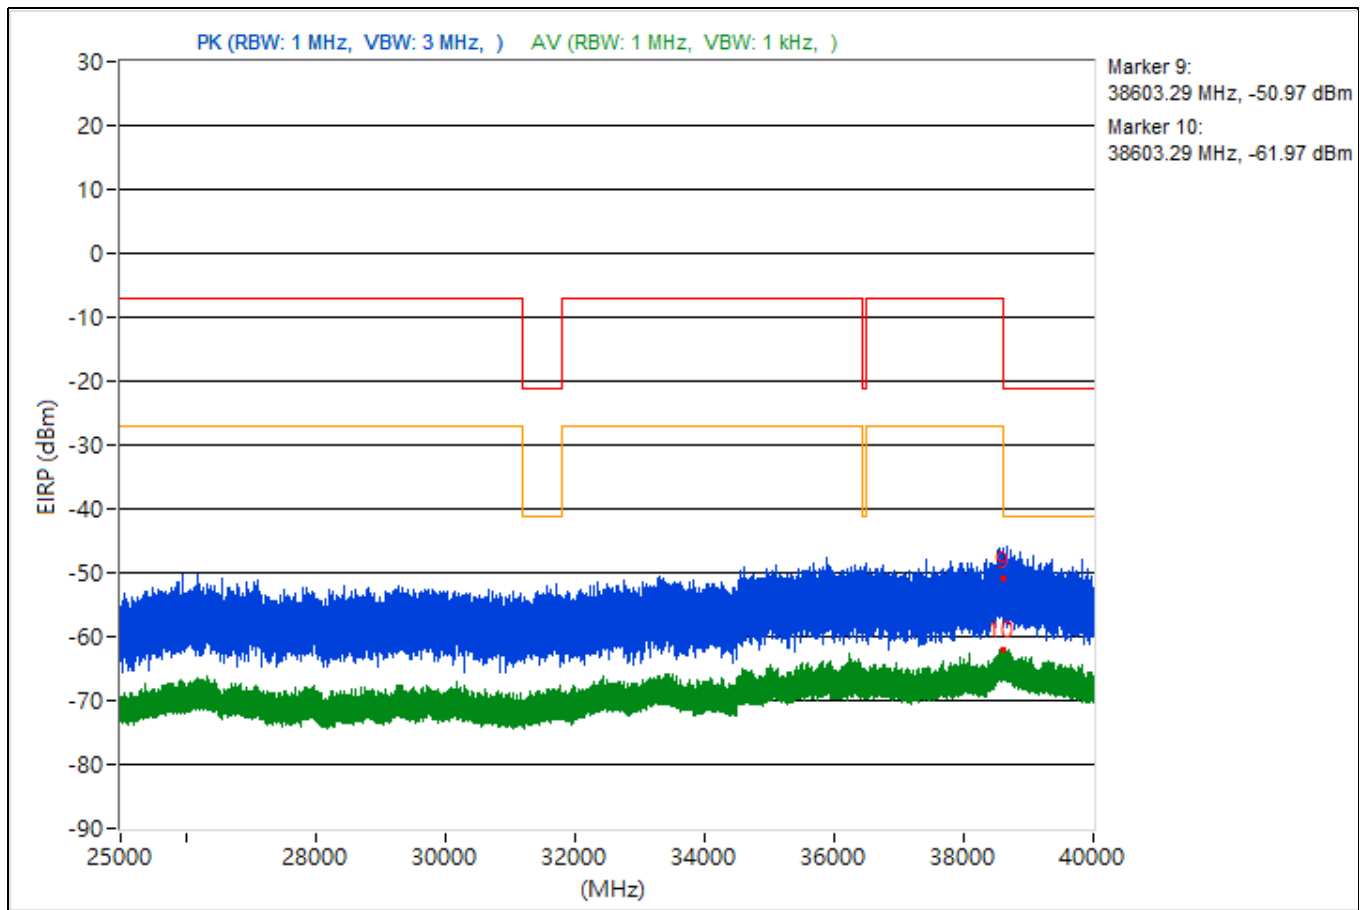


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5078.28	44.46 PK	74	-29.54	-55.72	4.92	-50.8
2	5078.28	35.87 AV	54	-18.13	-64.31	4.92	-59.39
3	14474.76	44.95 PK	74	-29.05	-55.23	4.92	-50.31
4	14474.76	34.79 AV	54	-19.21	-65.39	4.92	-60.47
5	19363	46.27 PK	74	-27.73	-53.91	4.92	-48.99
6	19363	36.59 AV	54	-17.41	-63.59	4.92	-58.67
7	23833.1	47.35 PK	74	-26.65	-52.83	4.92	-47.91
8	23833.1	37.36 AV	54	-16.64	-62.82	4.92	-57.9
9	38640	40.65 PK	74	-33.35	-59.53	4.92	-54.61
10	38640	33.06 AV	54	-20.94	-67.12	4.92	-62.2

Note: Margin value = Emission Level - Limit value

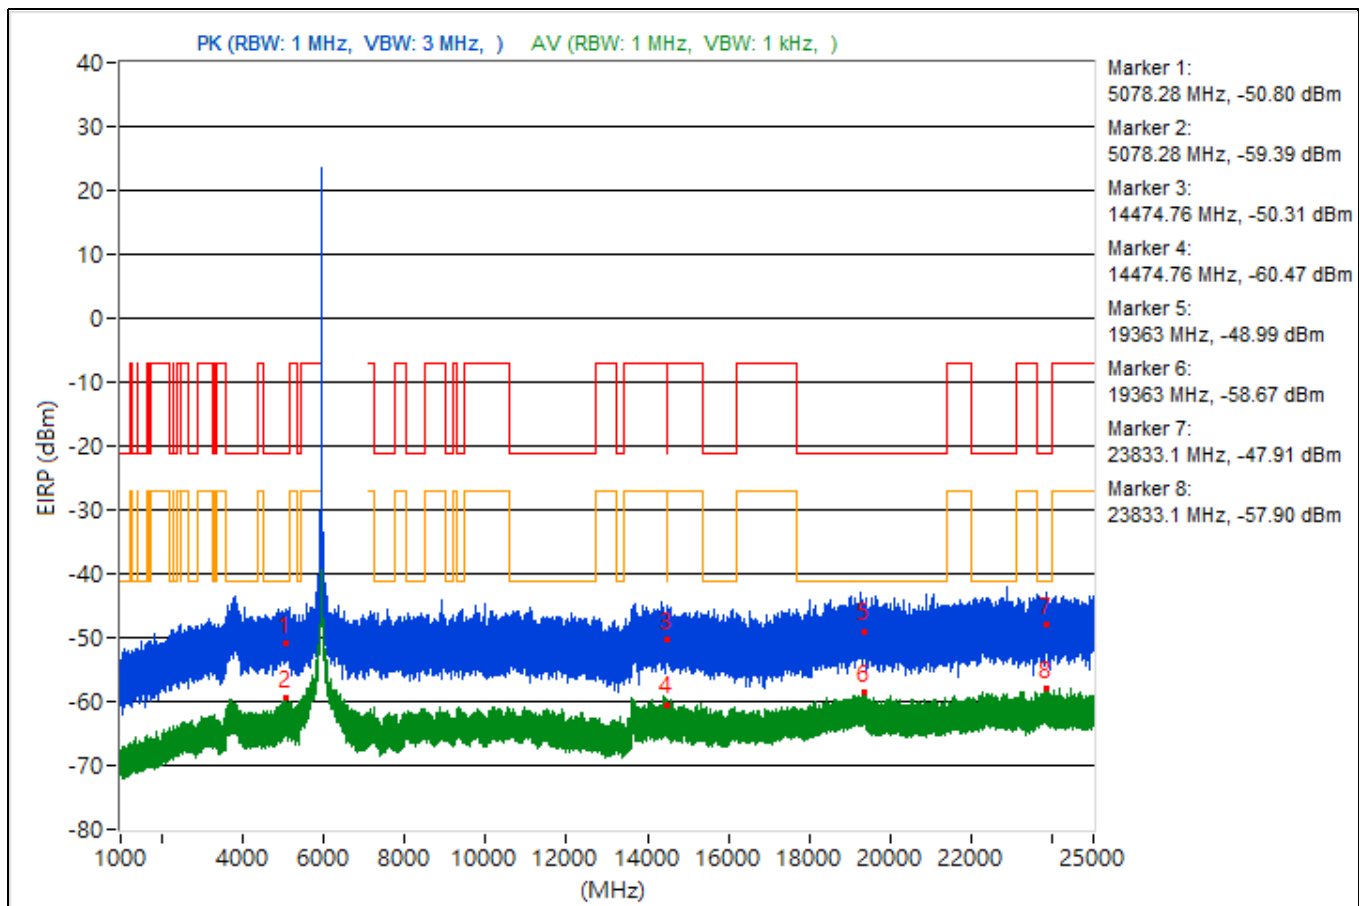


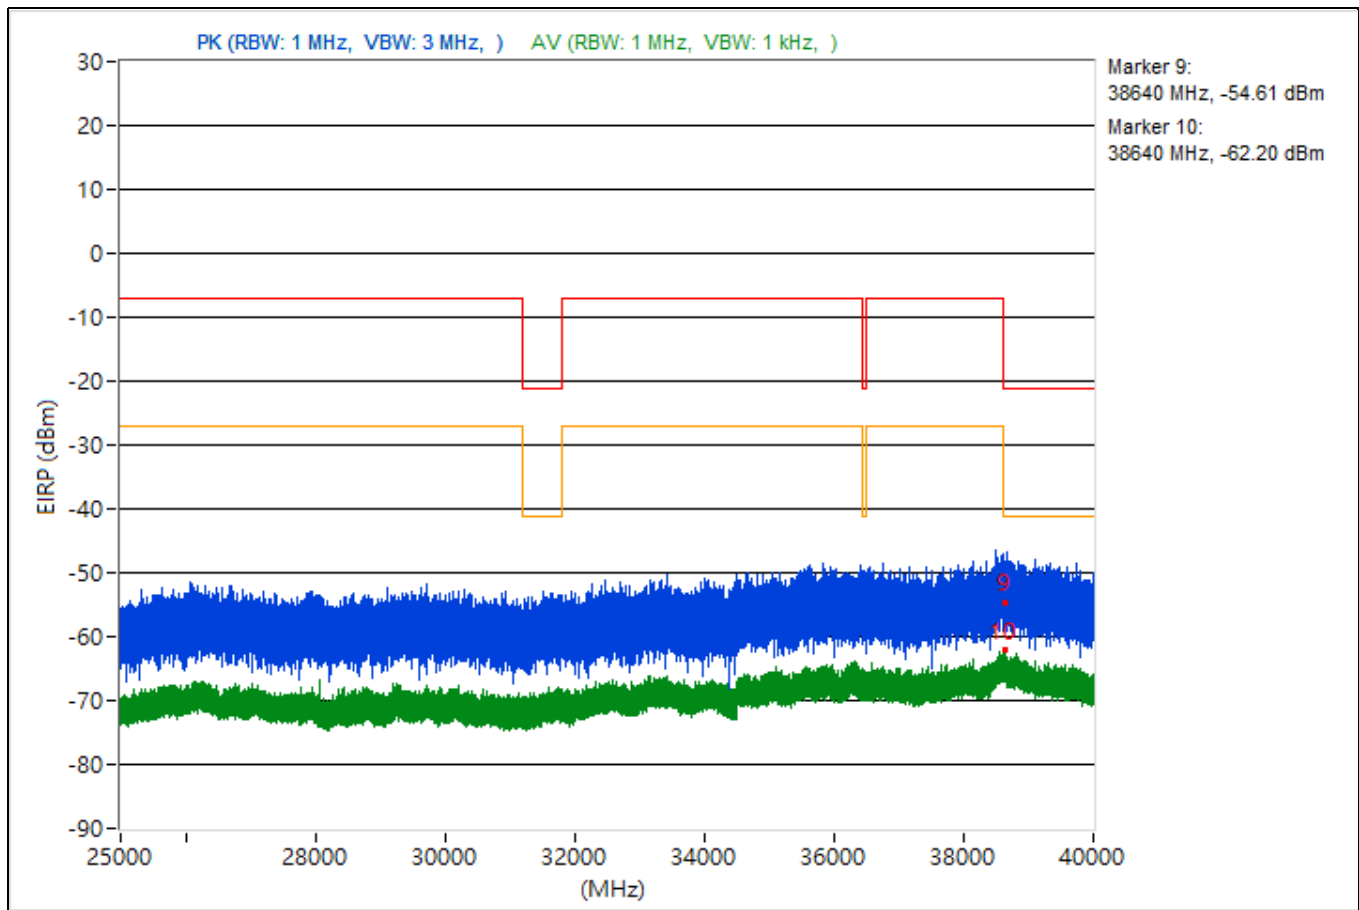


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.76	47.41 PK	74	-26.59	-52.77	4.92	-47.85
2	3812.76	35.49 AV	54	-18.51	-64.69	4.92	-59.77
3	14496.18	47.9 PK	74	-26.1	-52.28	4.92	-47.36
4	14496.18	34.85 AV	54	-19.15	-65.33	4.92	-60.41
5	19086.4	46.06 PK	74	-27.94	-54.12	4.92	-49.2
6	19086.4	36.37 AV	54	-17.63	-63.81	4.92	-58.89
7	23793.7	50.16 PK	74	-23.84	-50.02	4.92	-45.1
8	23793.7	37.61 AV	54	-16.39	-62.57	4.92	-57.65
9	38641.42	44.76 PK	74	-29.24	-55.42	4.92	-50.5
10	38641.42	33.27 AV	54	-20.73	-66.91	4.92	-61.99

Note: Margin value = Emission Level - Limit value

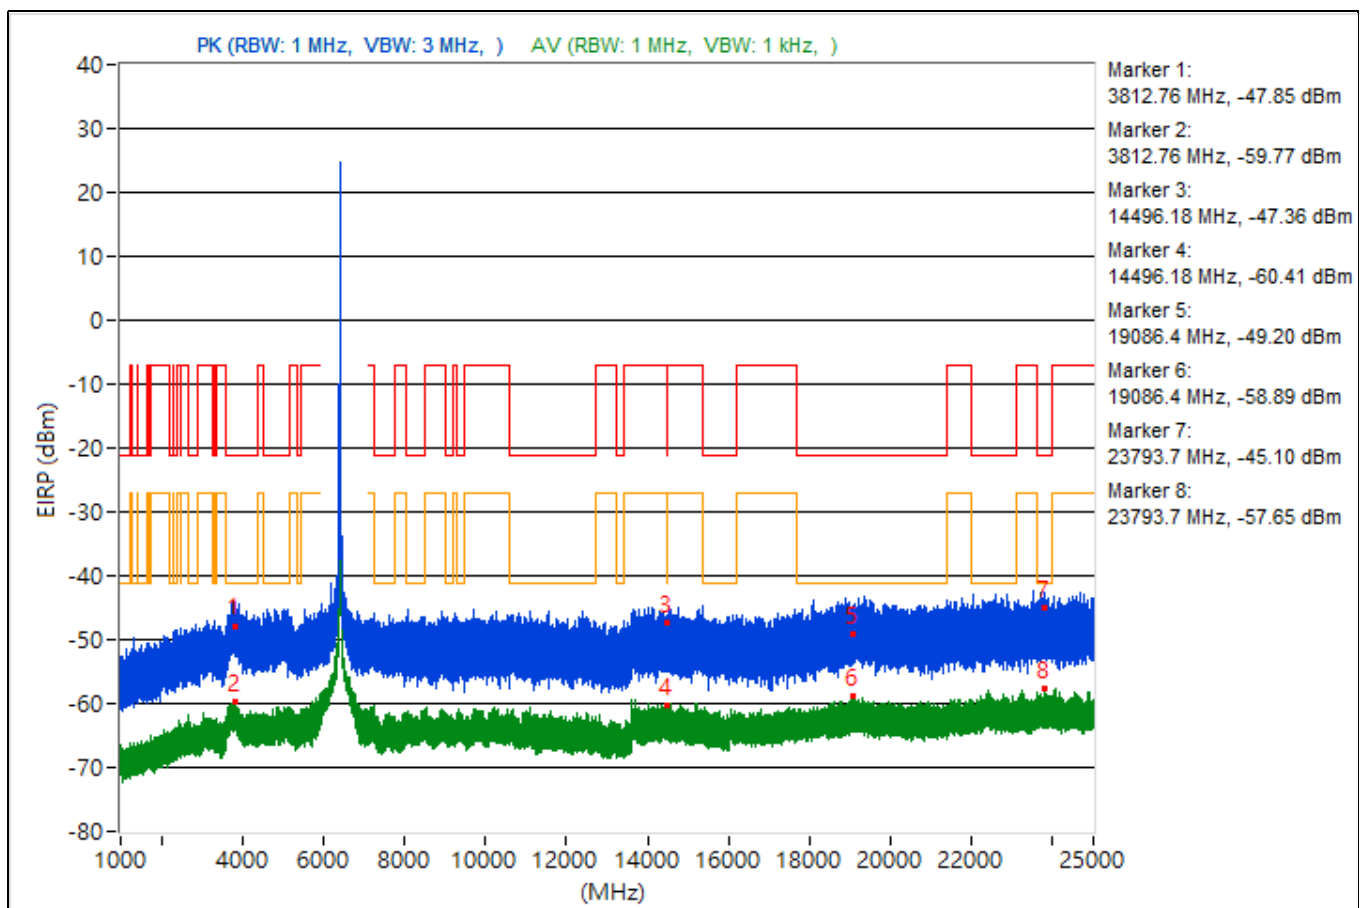


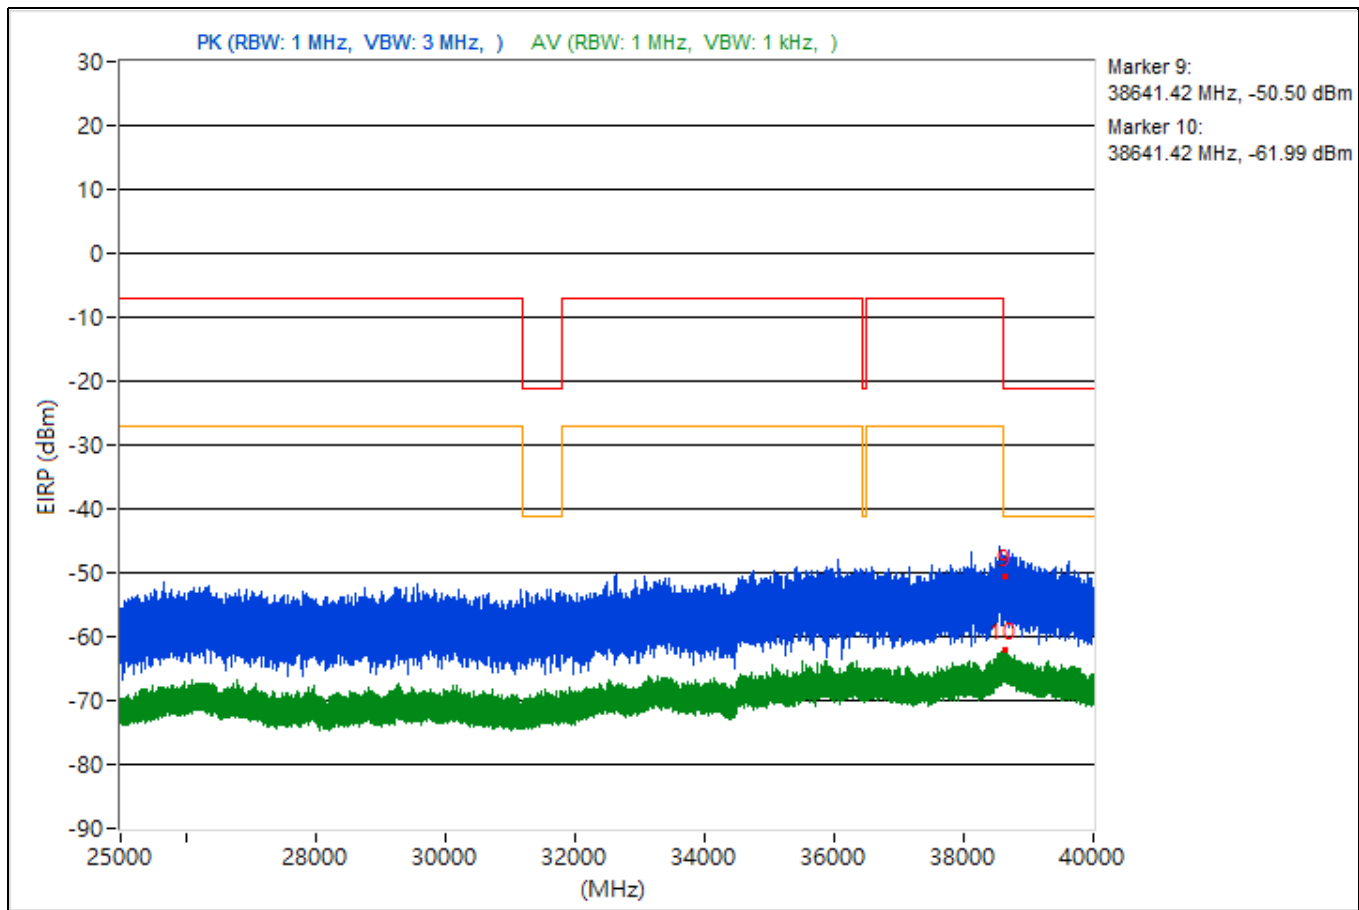


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.84	44.81 PK	74	-29.19	-55.37	4.92	-50.45
2	3799.84	35.51 AV	54	-18.49	-64.67	4.92	-59.75
3	14481.24	43.49 PK	74	-30.51	-56.69	4.92	-51.77
4	14481.24	34.74 AV	54	-19.26	-65.44	4.92	-60.52
5	19385.3	43.82 PK	74	-30.18	-56.36	4.92	-51.44
6	19385.3	36.24 AV	54	-17.76	-63.94	4.92	-59.02
7	23841.2	45.2 PK	74	-28.8	-54.98	4.92	-50.06
8	23841.2	36.87 AV	54	-17.13	-63.31	4.92	-58.39
9	38639.02	43.72 PK	74	-30.28	-56.46	4.92	-51.54
10	38639.02	33.01 AV	54	-20.99	-67.17	4.92	-62.25

Note: Margin value = Emission Level - Limit value

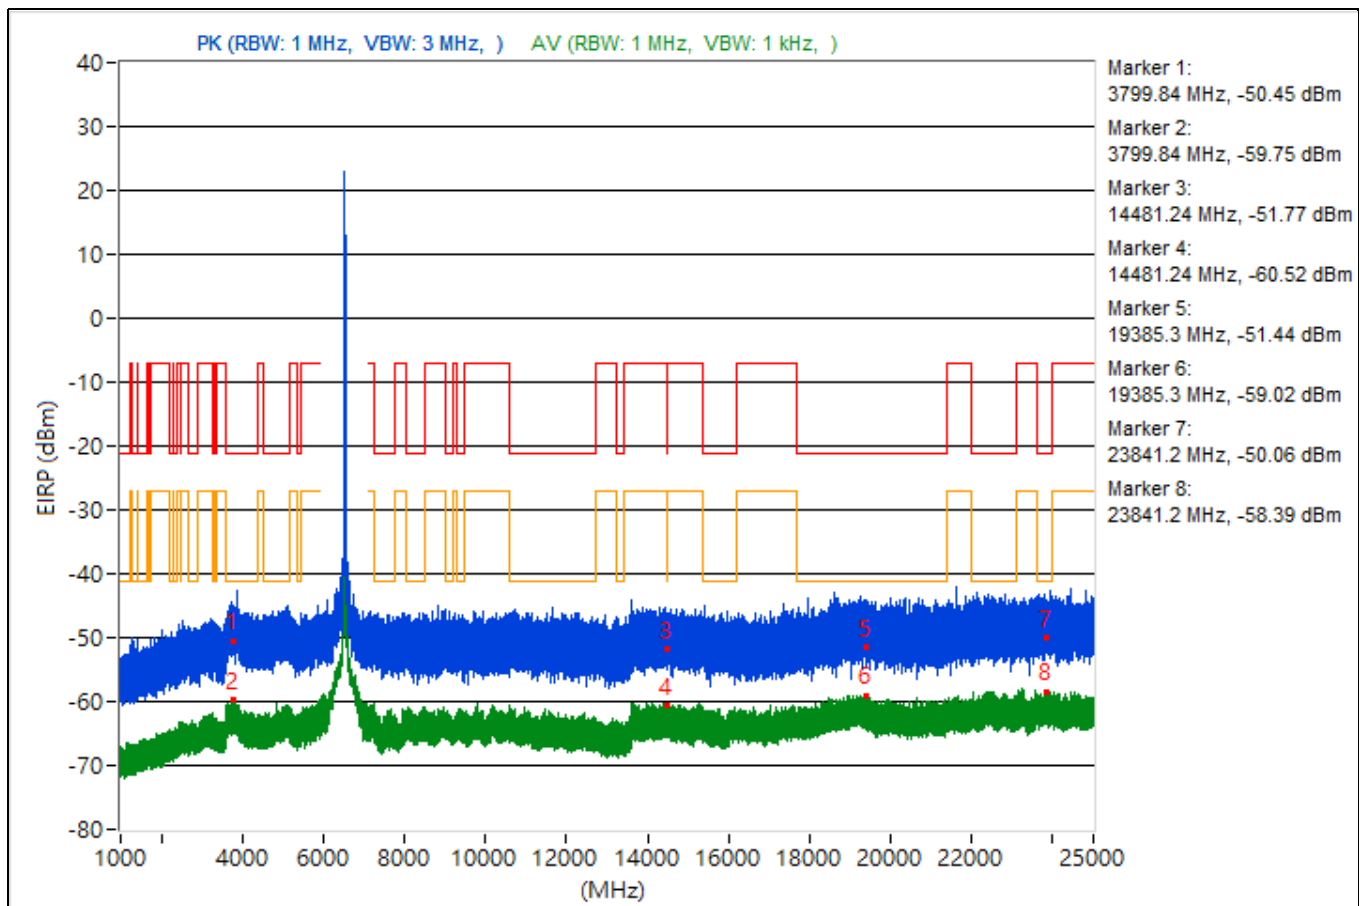


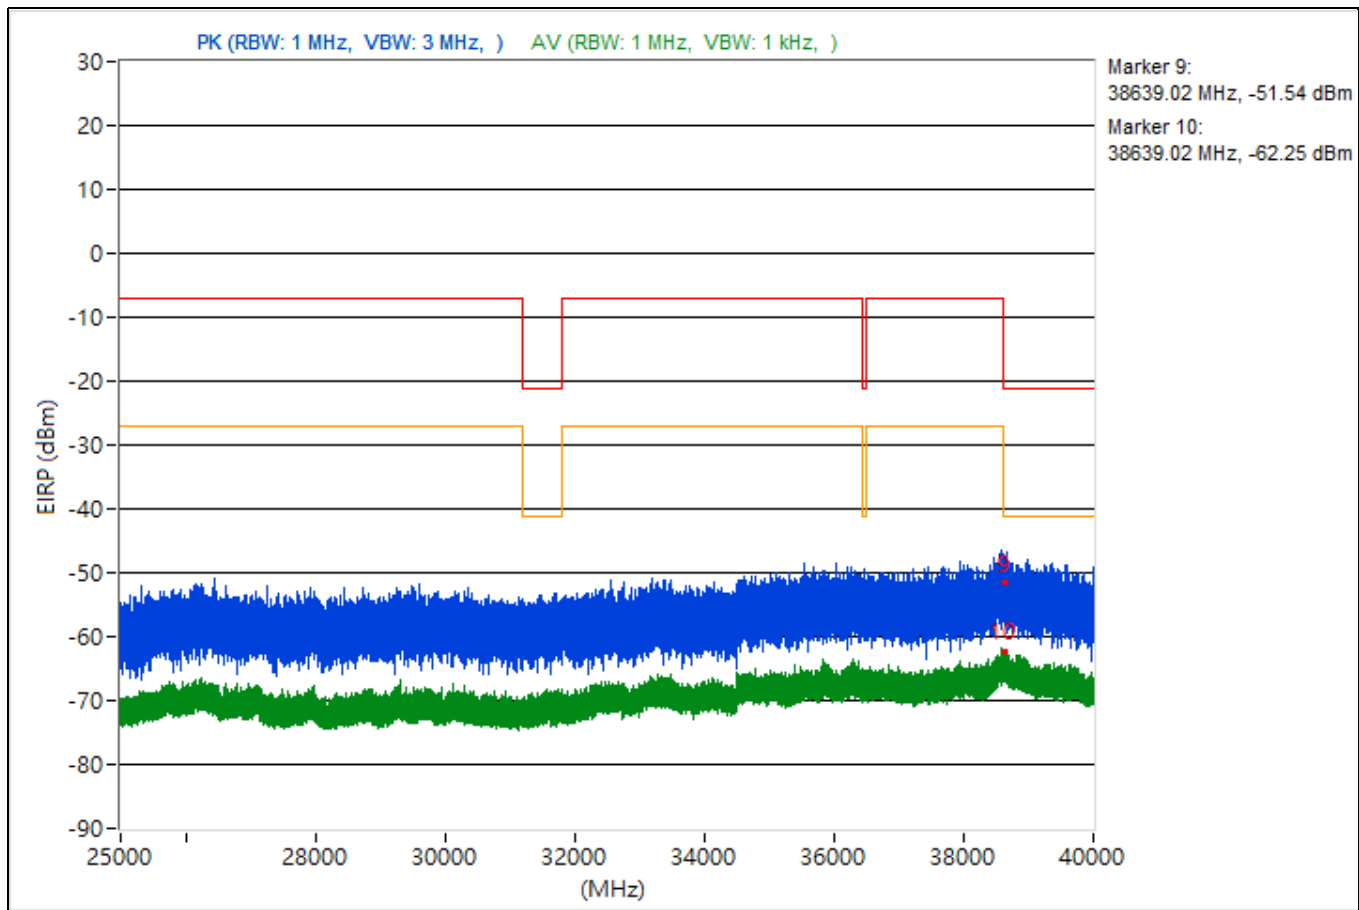


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.79	48.26 PK	74	-25.74	-51.92	4.92	-47
2	3808.79	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	7283.12	44.21 PK	74	-29.79	-55.97	4.92	-51.05
4	7283.12	35.08 AV	54	-18.92	-65.1	4.92	-60.18
5	19351.6	46.65 PK	74	-27.35	-53.53	4.92	-48.61
6	19351.6	36.76 AV	54	-17.24	-63.42	4.92	-58.5
7	23695.4	47.44 PK	74	-26.56	-52.74	4.92	-47.82
8	23695.4	37.42 AV	54	-16.58	-62.76	4.92	-57.84
9	38635.02	43.58 PK	74	-30.42	-56.6	4.92	-51.68
10	38635.02	33.32 AV	54	-20.68	-66.86	4.92	-61.94

Note: Margin value = Emission Level - Limit value

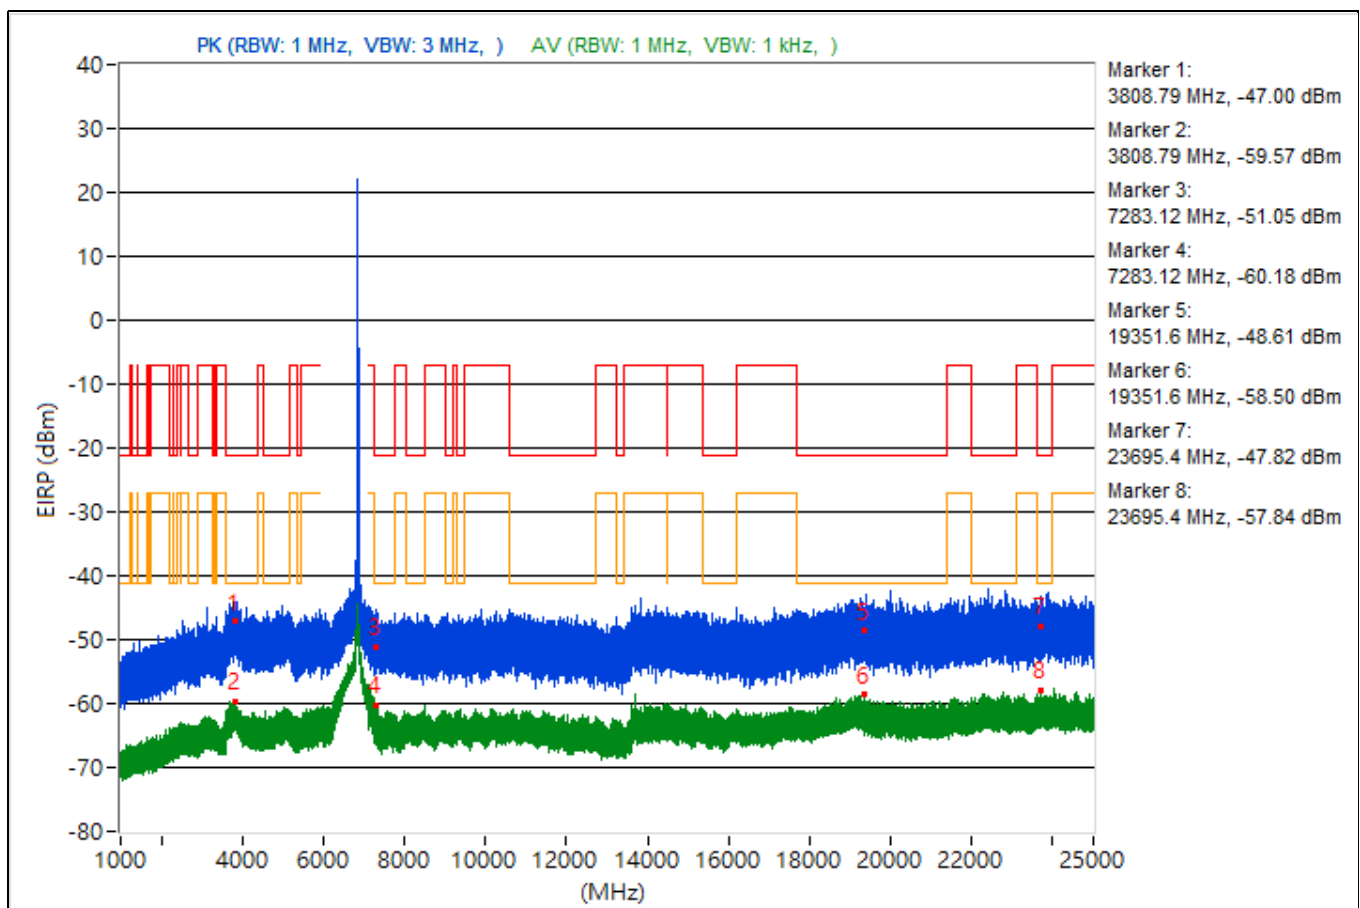


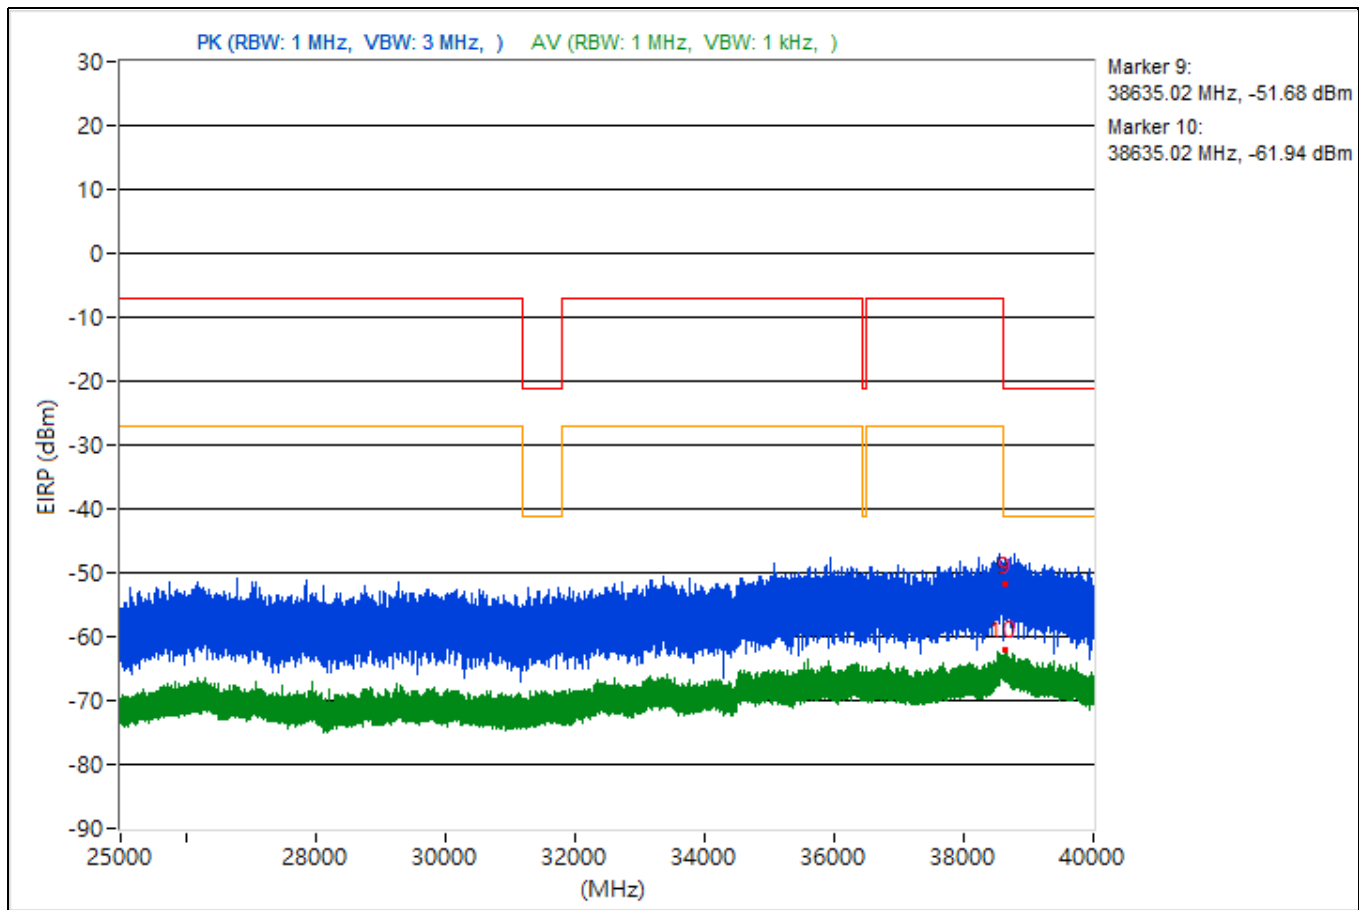


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3847.52	49.29 PK	74	-24.71	-50.89	4.92	-45.97
2	3847.52	36.19 AV	54	-17.81	-63.99	4.92	-59.07
3	14492.89	44.46 PK	74	-29.54	-55.72	4.92	-50.8
4	14492.89	35.02 AV	54	-18.98	-65.16	4.92	-60.24
5	19560.1	46.35 PK	74	-27.65	-53.83	4.92	-48.91
6	19560.1	36.09 AV	54	-17.91	-64.09	4.92	-59.17
7	23938.7	44.68 PK	74	-29.32	-55.5	4.92	-50.58
8	23938.7	37.1 AV	54	-16.9	-63.08	4.92	-58.16
9	38666.31	44.52 PK	74	-29.48	-55.66	4.92	-50.74
10	38666.31	33.12 AV	54	-20.88	-67.06	4.92	-62.14

Note: Margin value = Emission Level - Limit value

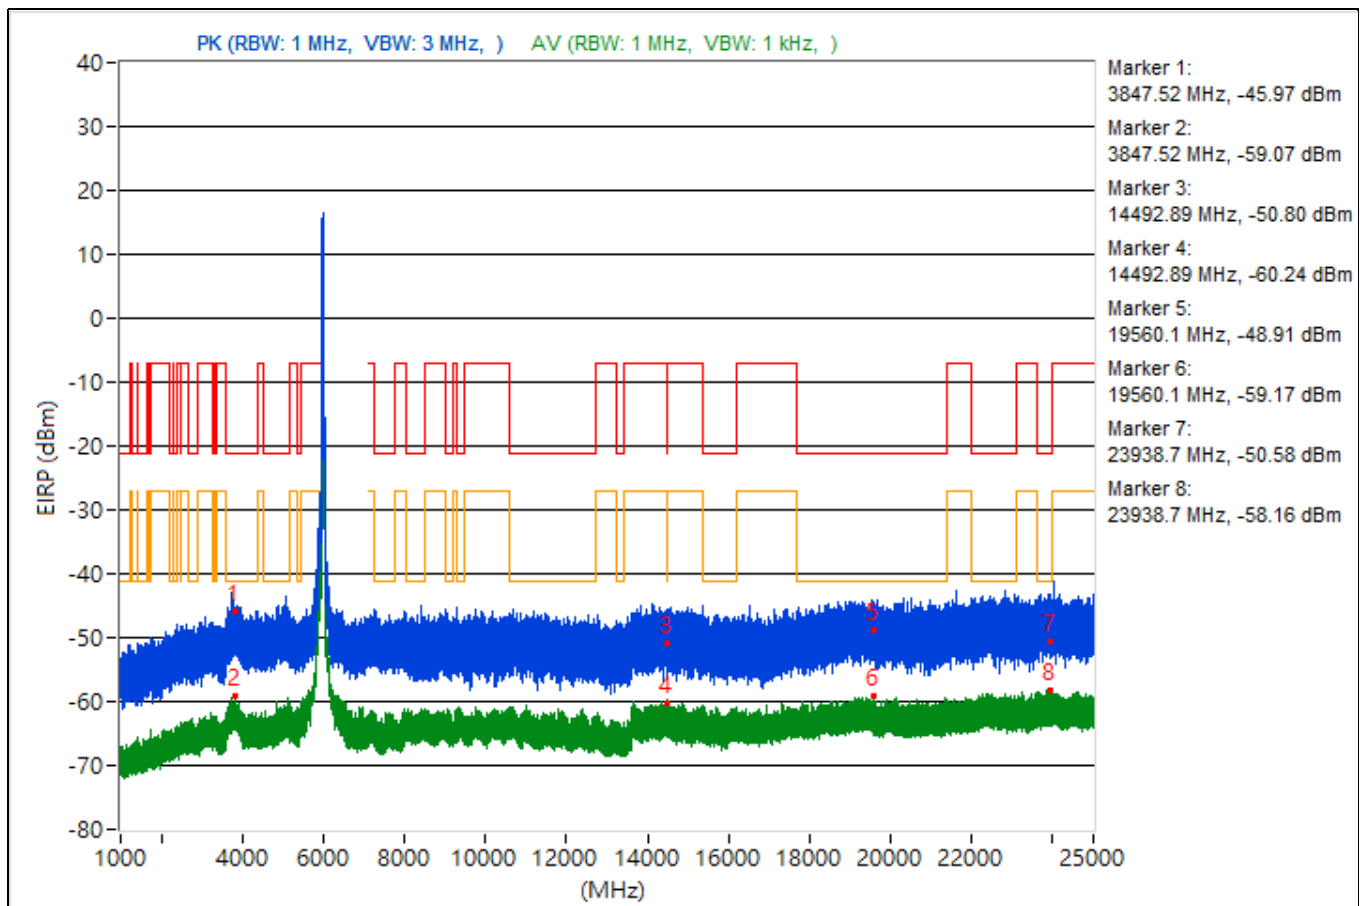


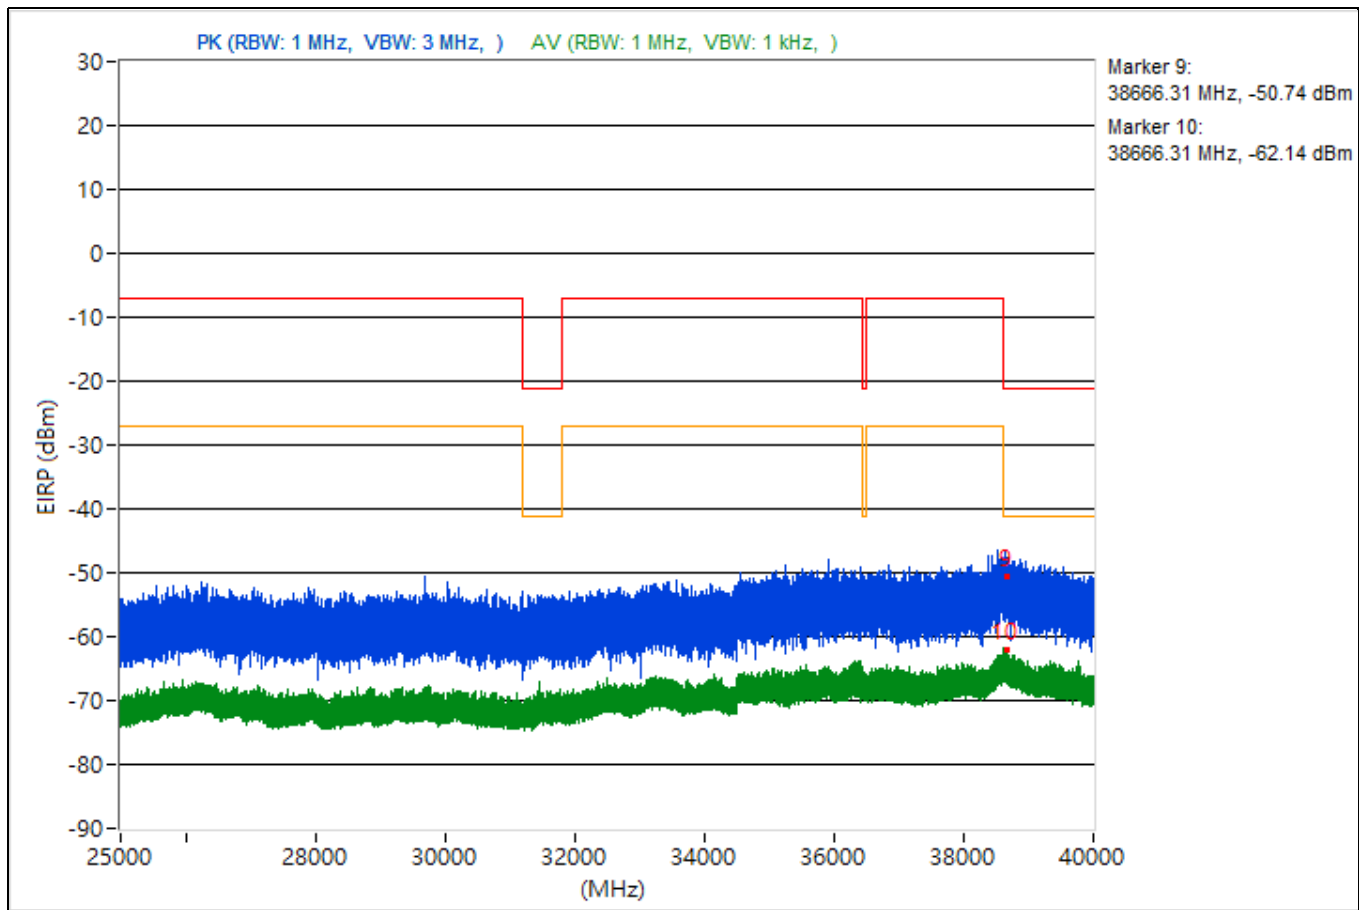


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.5	48.35 PK	74	-25.65	-51.83	4.92	-46.91
2	3803.5	35.93 AV	54	-18.07	-64.25	4.92	-59.33
3	14486.13	42.93 PK	74	-31.07	-57.25	4.92	-52.33
4	14486.13	34.99 AV	54	-19.01	-65.19	4.92	-60.27
5	19353.3	45.8 PK	74	-28.2	-54.38	4.92	-49.46
6	19353.3	36.42 AV	54	-17.58	-63.76	4.92	-58.84
7	23665.9	47.06 PK	74	-26.94	-53.12	4.92	-48.2
8	23665.9	36.89 AV	54	-17.11	-63.29	4.92	-58.37
9	38661.6	41.46 PK	74	-32.54	-58.72	4.92	-53.8
10	38661.6	33.54 AV	54	-20.46	-66.64	4.92	-61.72

Note: Margin value = Emission Level - Limit value

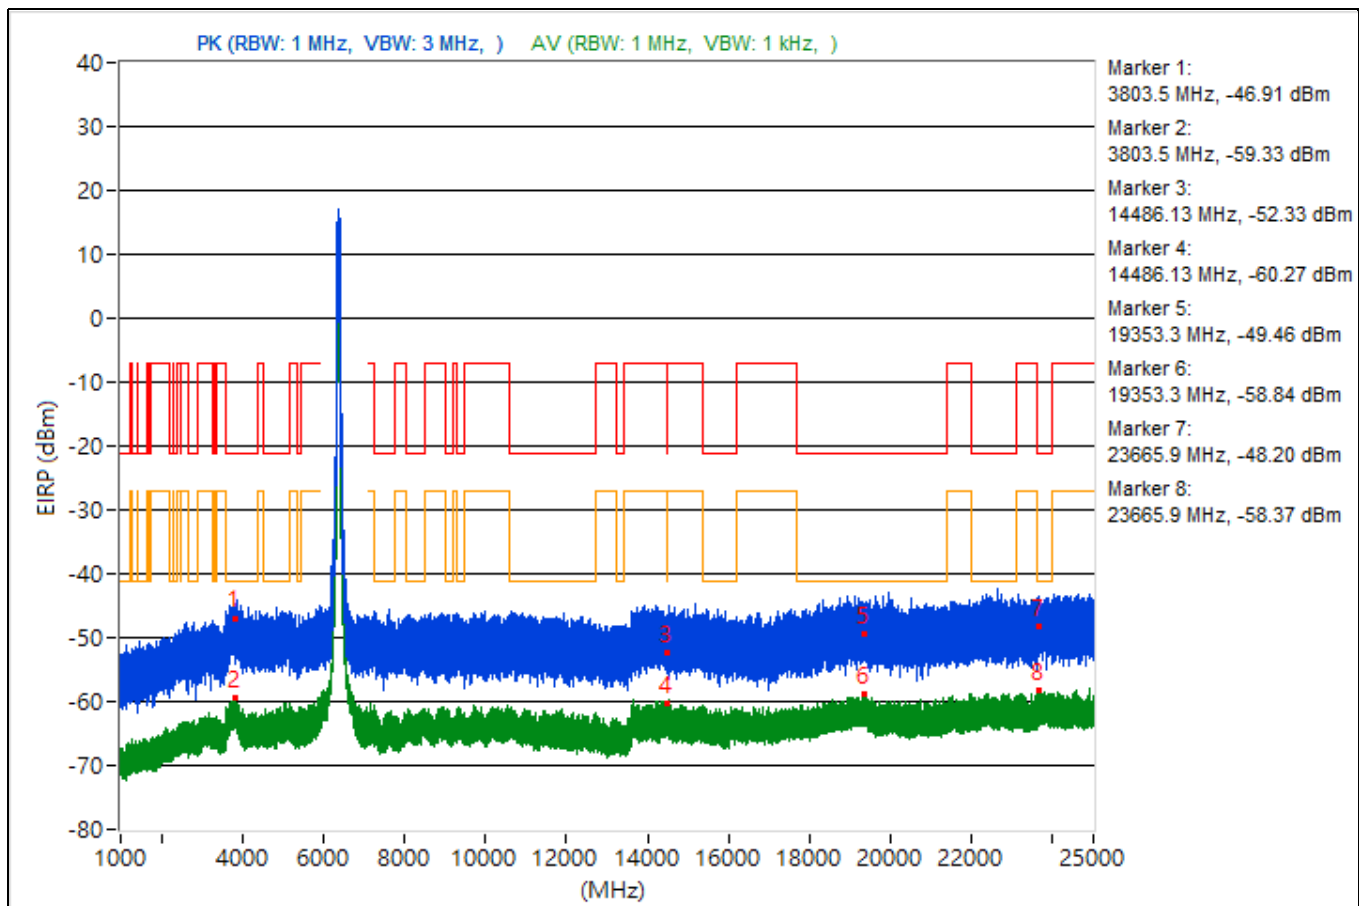


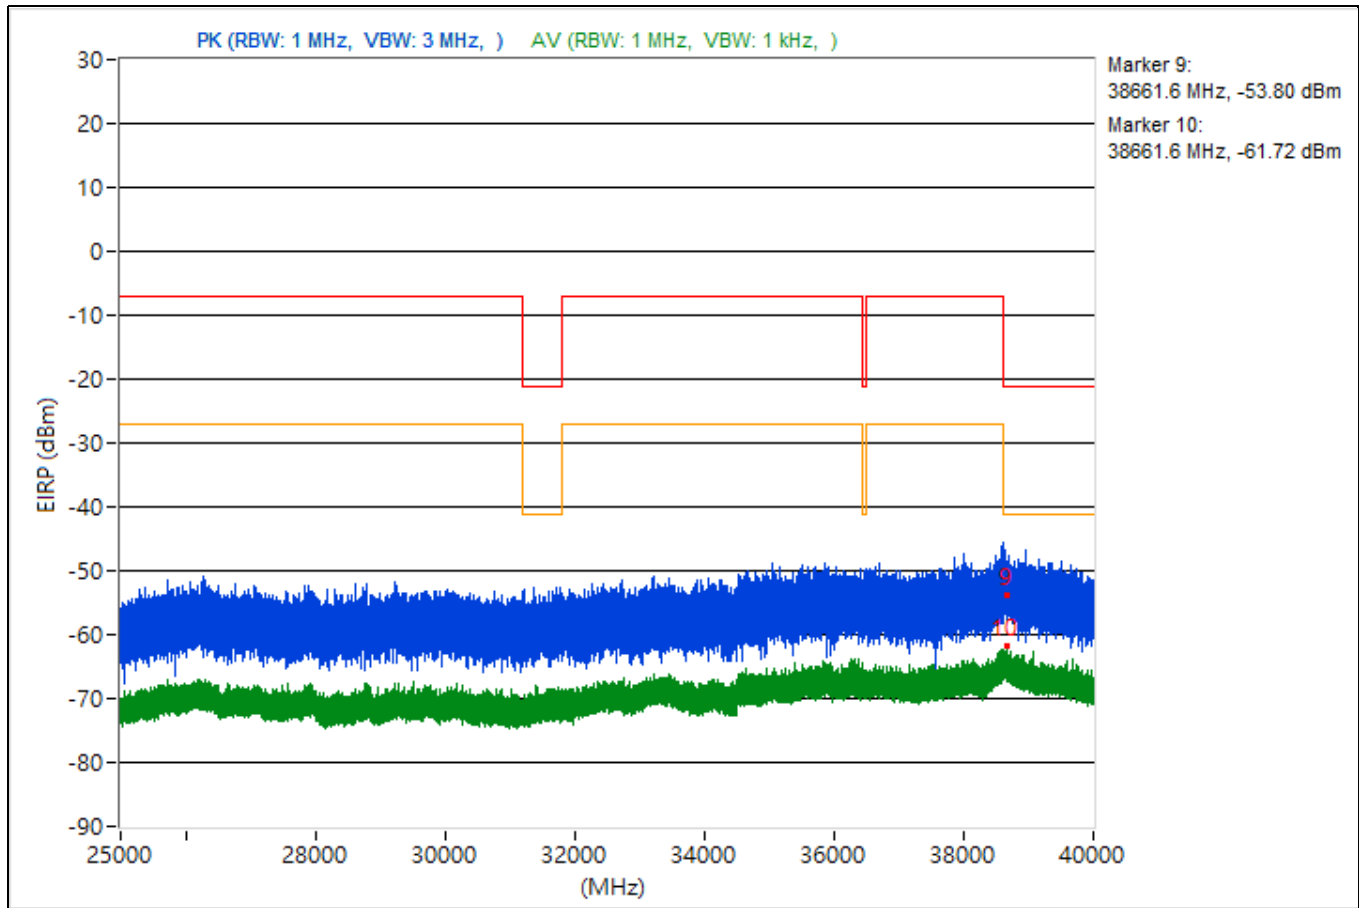


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.84	49.12 PK	74	-24.88	-51.06	4.92	-46.14
2	3757.84	35.59 AV	54	-18.41	-64.59	4.92	-59.67
3	14485.78	43.11 PK	74	-30.89	-57.07	4.92	-52.15
4	14485.78	34.83 AV	54	-19.17	-65.35	4.92	-60.43
5	18980.3	43.15 PK	74	-30.85	-57.03	4.92	-52.11
6	18980.3	36.41 AV	54	-17.59	-63.77	4.92	-58.85
7	22346.5	47.46 PK	74	-26.54	-52.72	4.92	-47.8
8	22346.5	37.15 AV	54	-16.85	-63.03	4.92	-58.11
9	38605.07	43.26 PK	74	-30.74	-56.92	4.92	-52
10	38605.07	33.01 AV	54	-20.99	-67.17	4.92	-62.25

Note: Margin value = Emission Level - Limit value

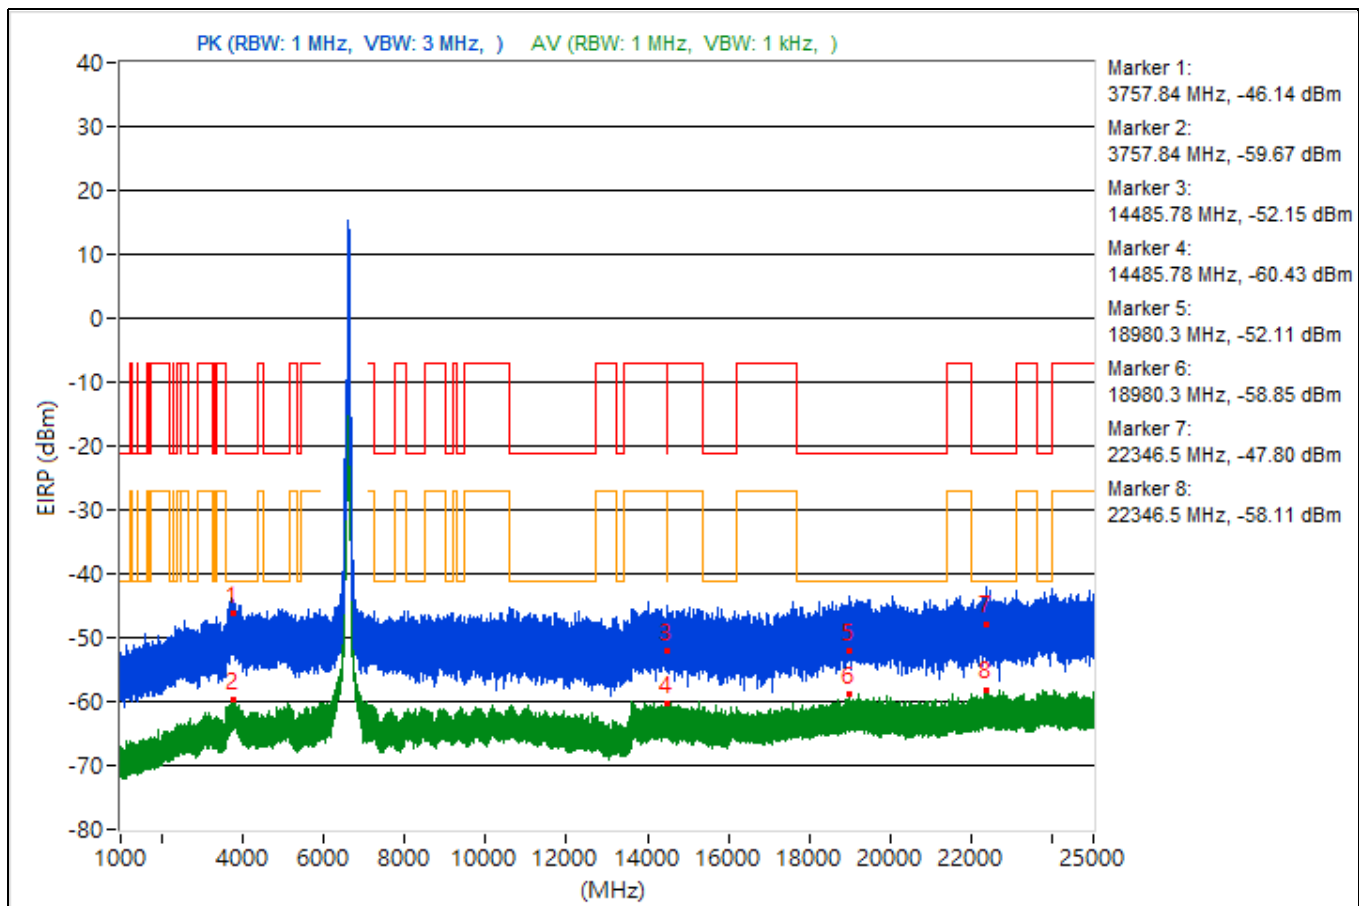


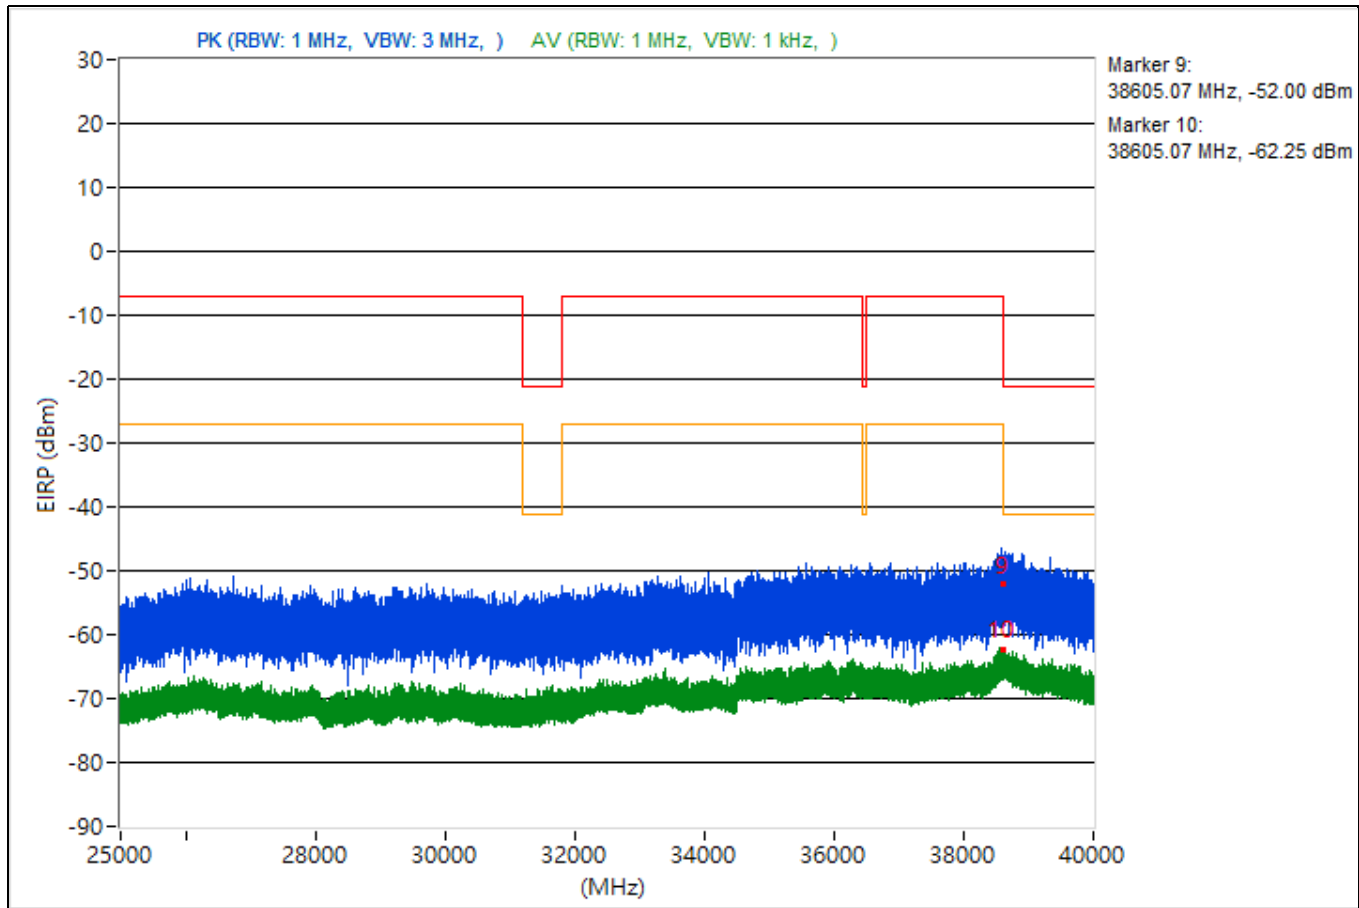


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.43	46.42 PK	74	-27.58	-53.76	4.92	-48.84
2	3776.43	35.42 AV	54	-18.58	-64.76	4.92	-59.84
3	15397.42	46.49 PK	74	-27.51	-53.69	4.92	-48.77
4	15397.42	34.63 AV	54	-19.37	-65.55	4.92	-60.63
5	19479.2	43.17 PK	74	-30.83	-57.01	4.92	-52.09
6	19479.2	36.77 AV	54	-17.23	-63.41	4.92	-58.49
7	22408.2	46.31 PK	74	-27.69	-53.87	4.92	-48.95
8	22408.2	36.87 AV	54	-17.13	-63.31	4.92	-58.39
9	38635.56	45 PK	74	-29	-55.18	4.92	-50.26
10	38635.56	33.28 AV	54	-20.72	-66.9	4.92	-61.98

Note: Margin value = Emission Level - Limit value

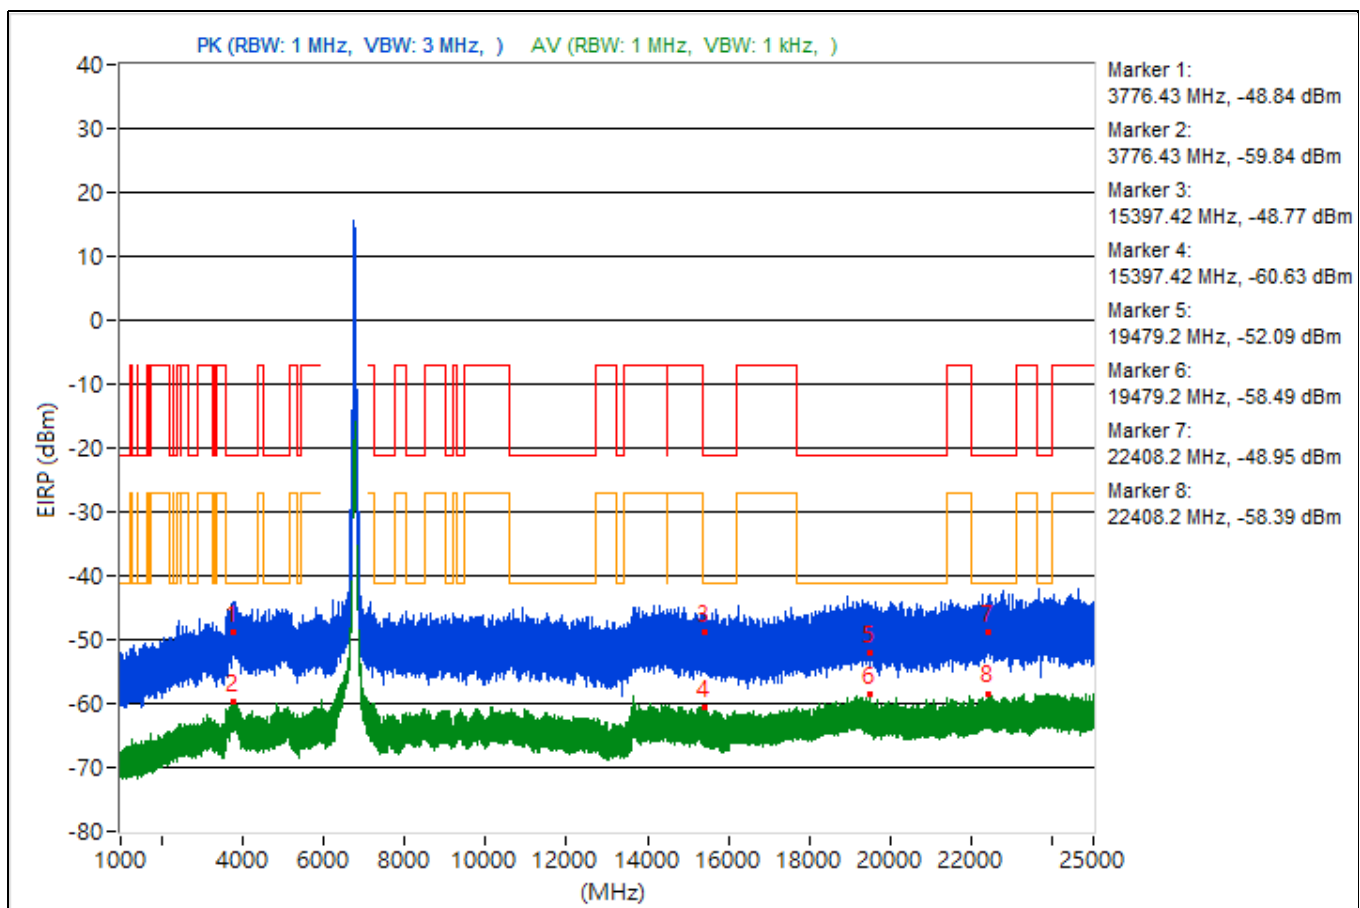

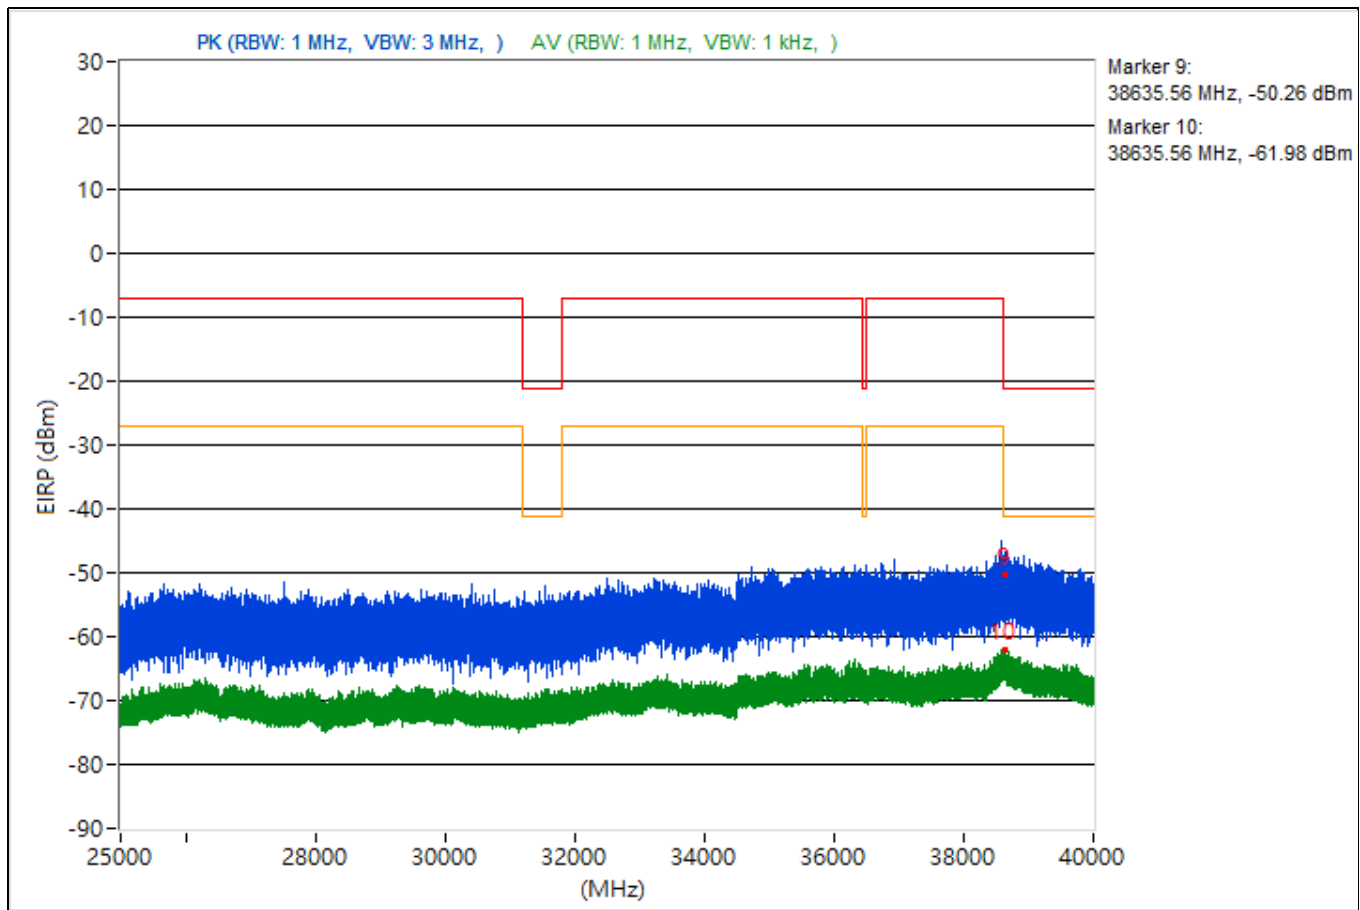



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5871.22	60.92 PK	88.26	-27.34	-39.26	4.92	-34.34
2	#5871.22	57.58 AV	68.26	-10.68	-42.6	4.92	-37.68
3	14487.02	46.53 PK	74	-27.47	-53.65	4.92	-48.73
4	14487.02	34.86 AV	54	-19.14	-65.32	4.92	-60.4
5	19510.7	43.89 PK	74	-30.11	-56.29	4.92	-51.37
6	19510.7	36.14 AV	54	-17.86	-64.04	4.92	-59.12
7	22771.7	46.71 PK	74	-27.29	-53.47	4.92	-48.55
8	22771.7	37.43 AV	54	-16.57	-62.75	4.92	-57.83
9	38626.49	42.38 PK	74	-31.62	-57.8	4.92	-52.88
10	38626.49	33.32 AV	54	-20.68	-66.86	4.92	-61.94

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

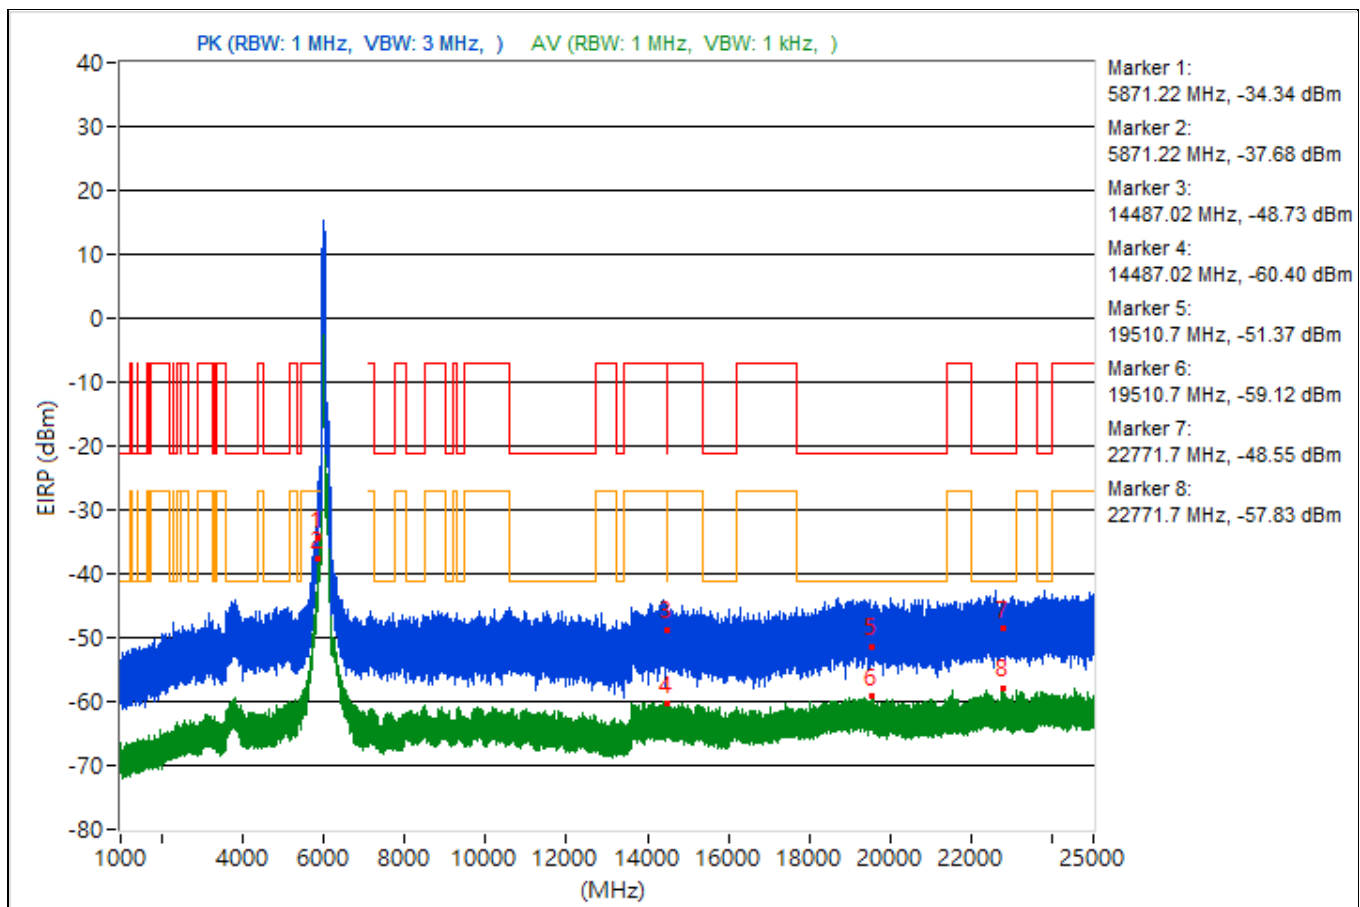


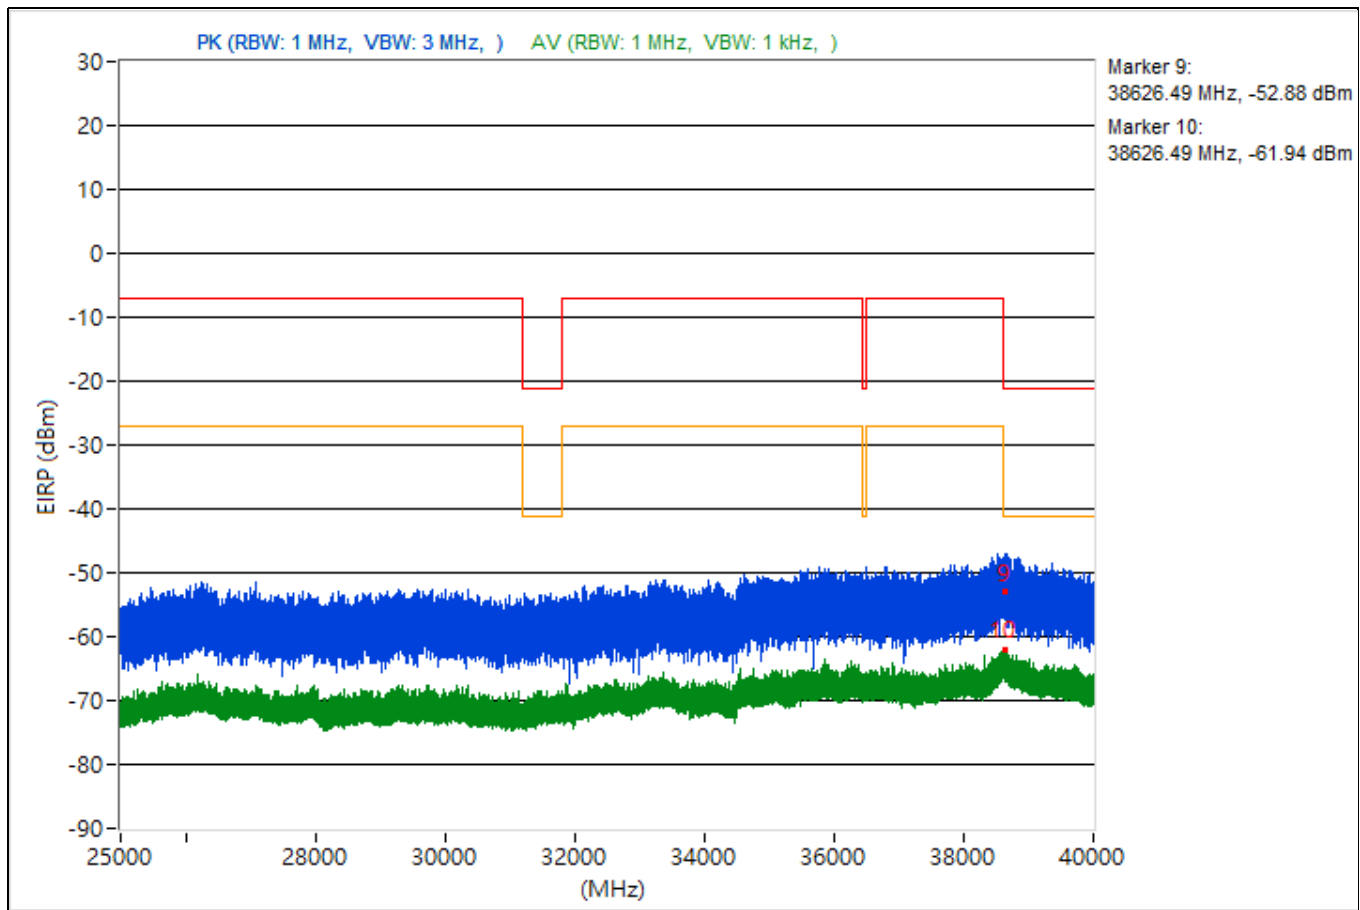


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5065.99	46.62 PK	74	-27.38	-53.56	4.92	-48.64
2	5065.99	35.47 AV	54	-18.53	-64.71	4.92	-59.79
3	14496.8	47.22 PK	74	-26.78	-52.96	4.92	-48.04
4	14496.8	34.82 AV	54	-19.18	-65.36	4.92	-60.44
5	19023.7	46.96 PK	74	-27.04	-53.22	4.92	-48.3
6	19023.7	36.04 AV	54	-17.96	-64.14	4.92	-59.22
7	23917	47.62 PK	74	-26.38	-52.56	4.92	-47.64
8	23917	37 AV	54	-17	-63.18	4.92	-58.26
9	38664.71	42.65 PK	74	-31.35	-57.53	4.92	-52.61
10	38664.71	33.05 AV	54	-20.95	-67.13	4.92	-62.21

Note: Margin value = Emission Level - Limit value

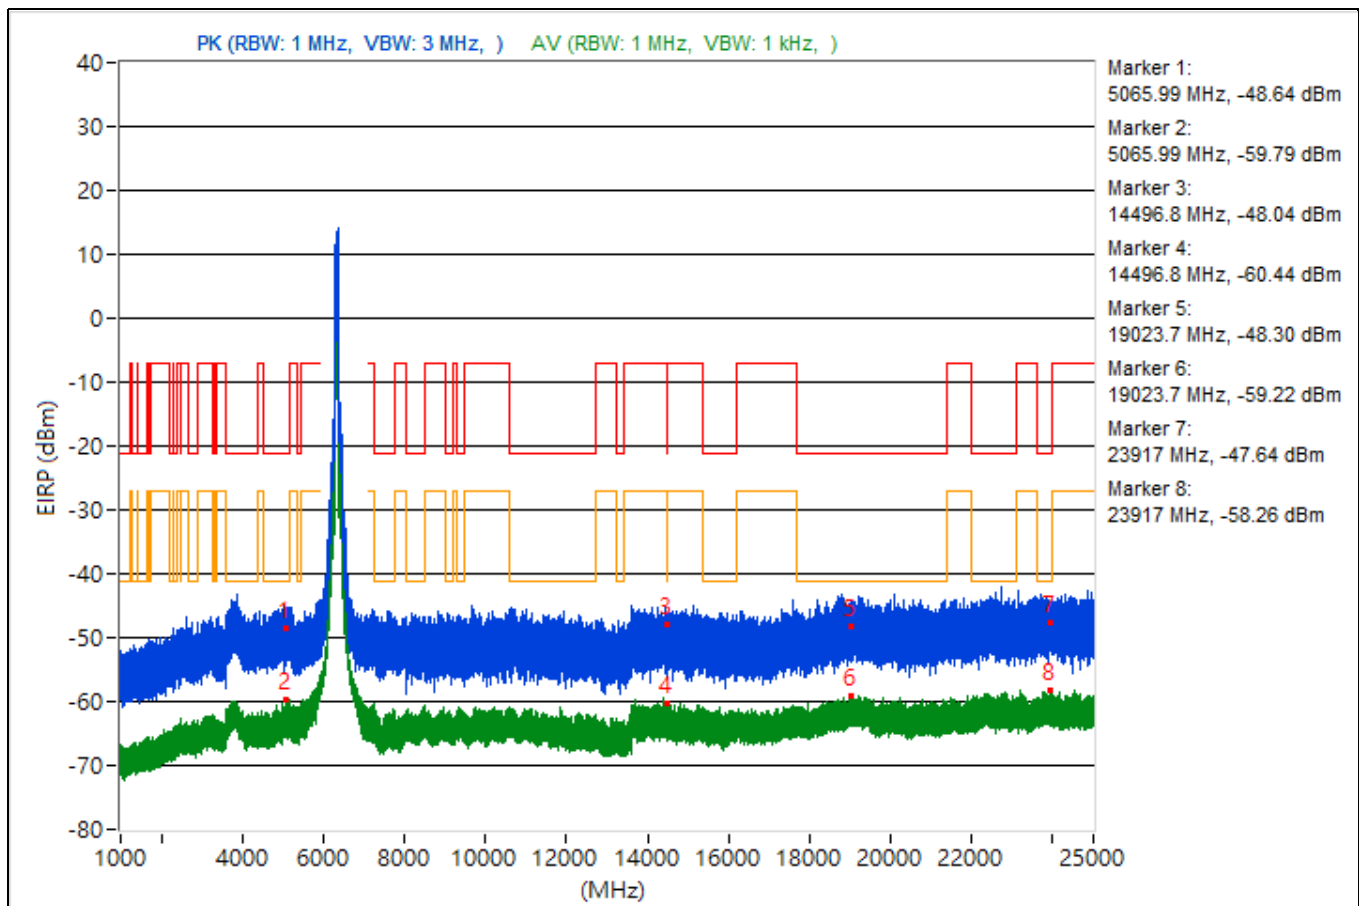


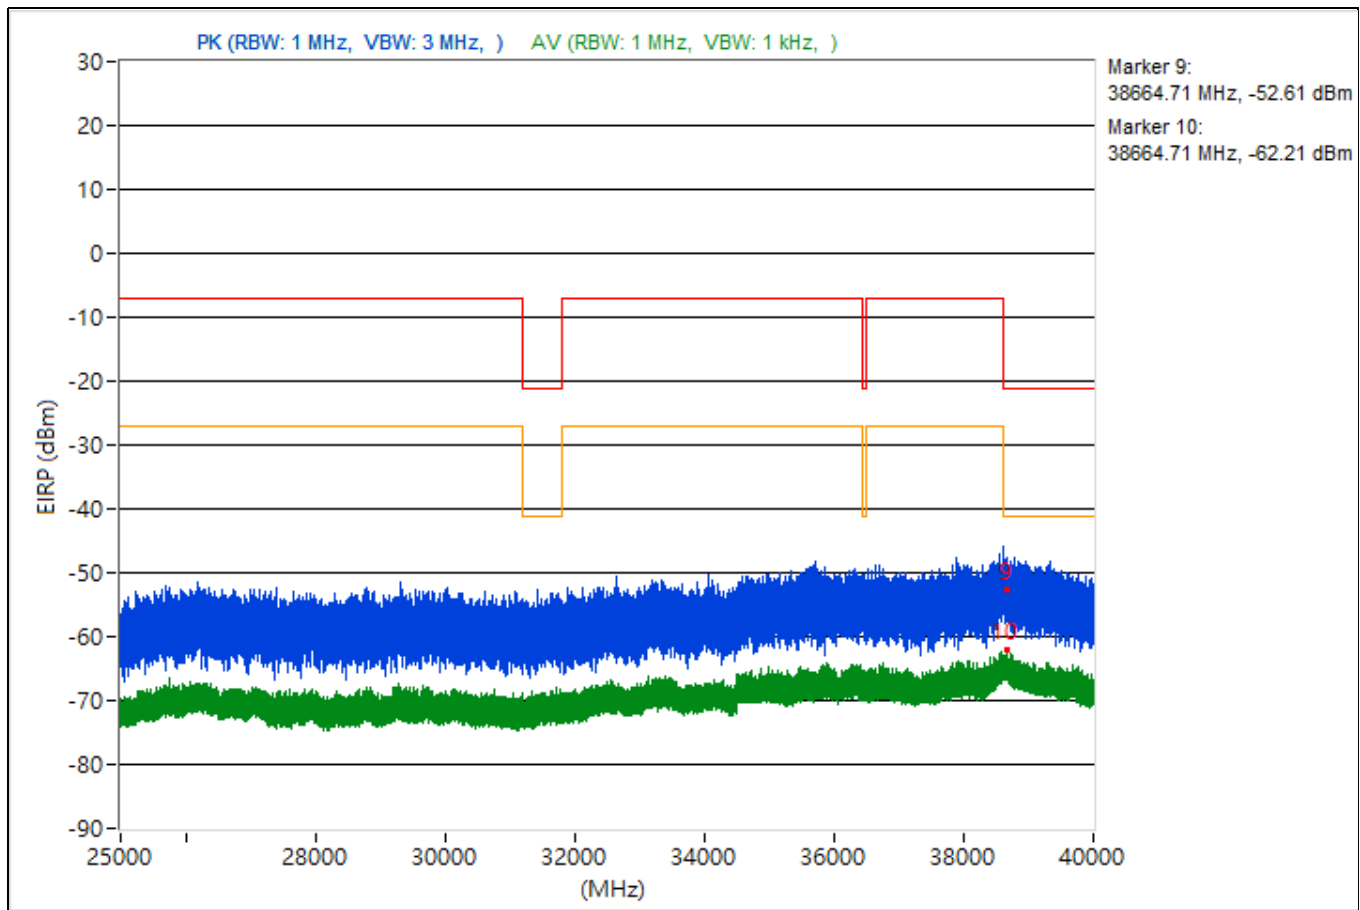


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3835.23	46.21 PK	74	-27.79	-53.97	4.92	-49.05
2	3835.23	35.41 AV	54	-18.59	-64.77	4.92	-59.85
3	14478.13	45.96 PK	74	-28.04	-54.22	4.92	-49.3
4	14478.13	35.12 AV	54	-18.88	-65.06	4.92	-60.14
5	19497.2	43.08 PK	74	-30.92	-57.1	4.92	-52.18
6	19497.2	36.34 AV	54	-17.66	-63.84	4.92	-58.92
7	22375.2	46.03 PK	74	-27.97	-54.15	4.92	-49.23
8	22375.2	37.12 AV	54	-16.88	-63.06	4.92	-58.14
9	38622.84	44.55 PK	74	-29.45	-55.63	4.92	-50.71
10	38622.84	33 AV	54	-21	-67.18	4.92	-62.26

Note: Margin value = Emission Level - Limit value

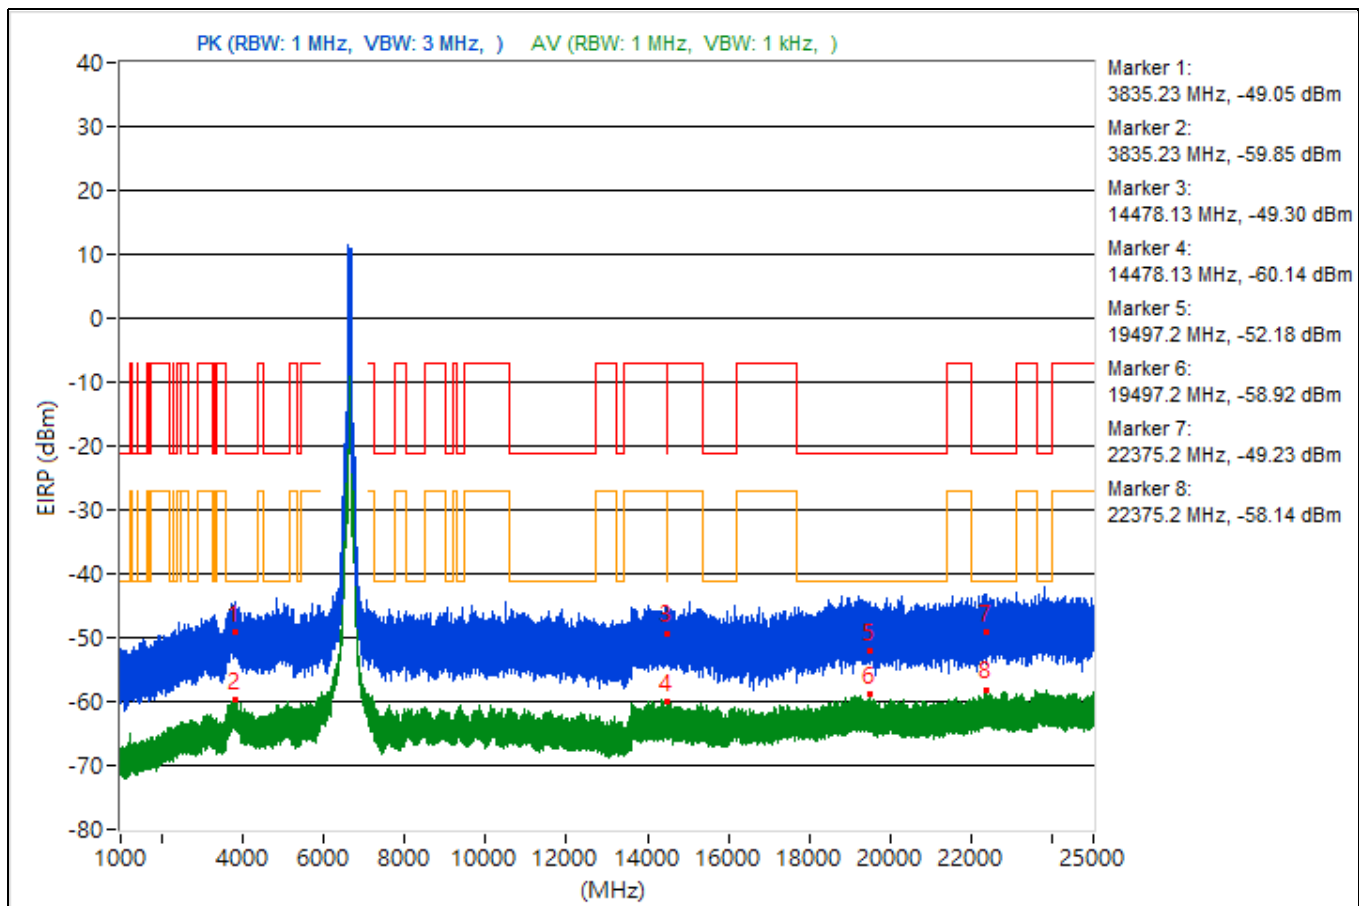

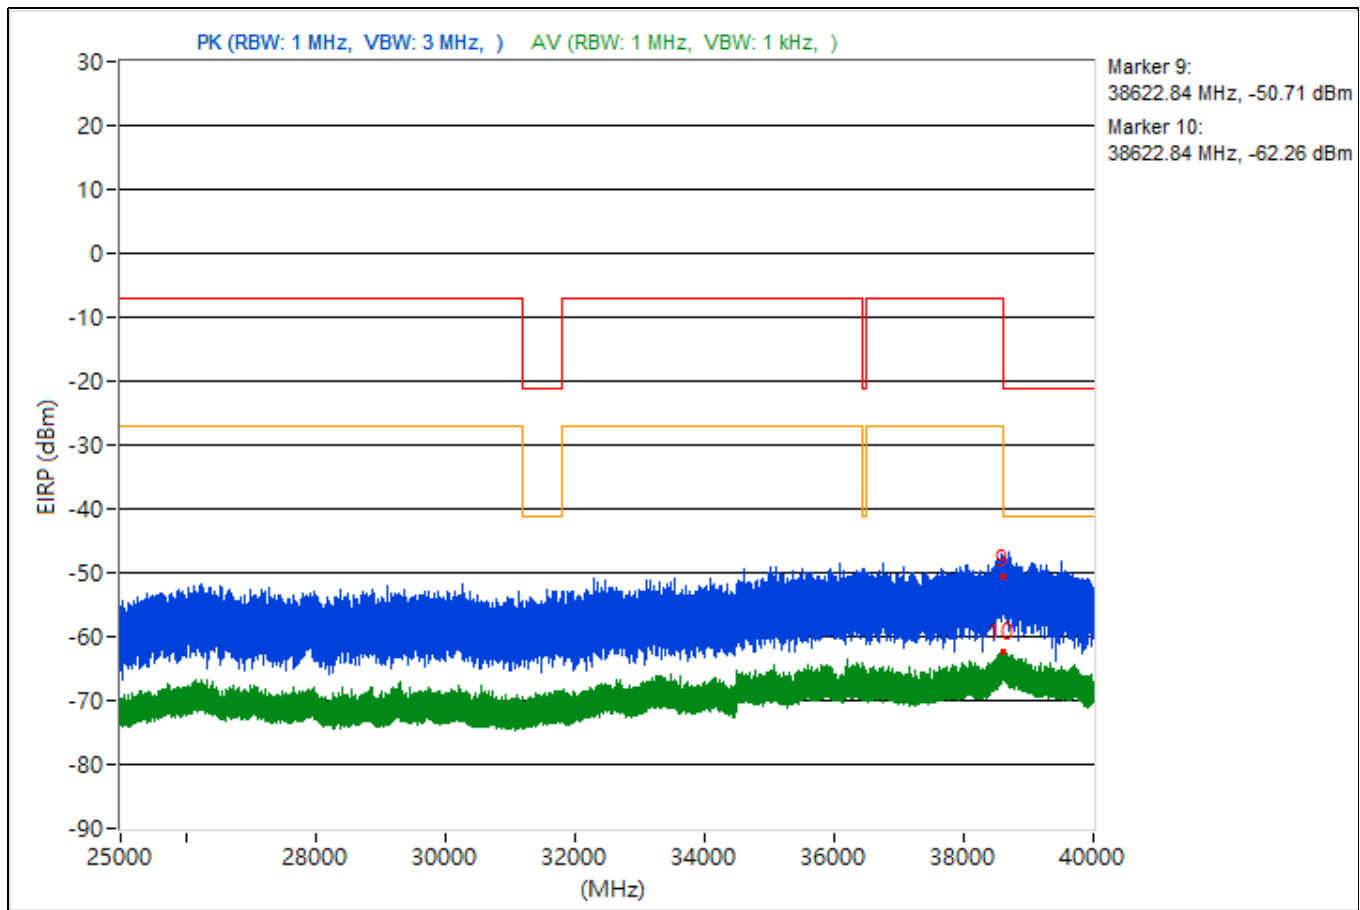



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5872.47	65.57 PK	88.26	-22.69	-34.61	4.92	-29.69
2	#5872.47	57.86 AV	68.26	-10.4	-42.32	4.92	-37.4
3	14474.84	44.26 PK	74	-29.74	-55.92	4.92	-51
4	14474.84	34.98 AV	54	-19.02	-65.2	4.92	-60.28
5	19484.8	44.84 PK	74	-29.16	-55.34	4.92	-50.42
6	19484.8	36.11 AV	54	-17.89	-64.07	4.92	-59.15
7	23831.8	47.94 PK	74	-26.06	-52.24	4.92	-47.32
8	23831.8	37.06 AV	54	-16.94	-63.12	4.92	-58.2
9	38604.18	45.93 PK	74	-28.07	-54.25	4.92	-49.33
10	38604.18	32.98 AV	54	-21.02	-67.2	4.92	-62.28

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

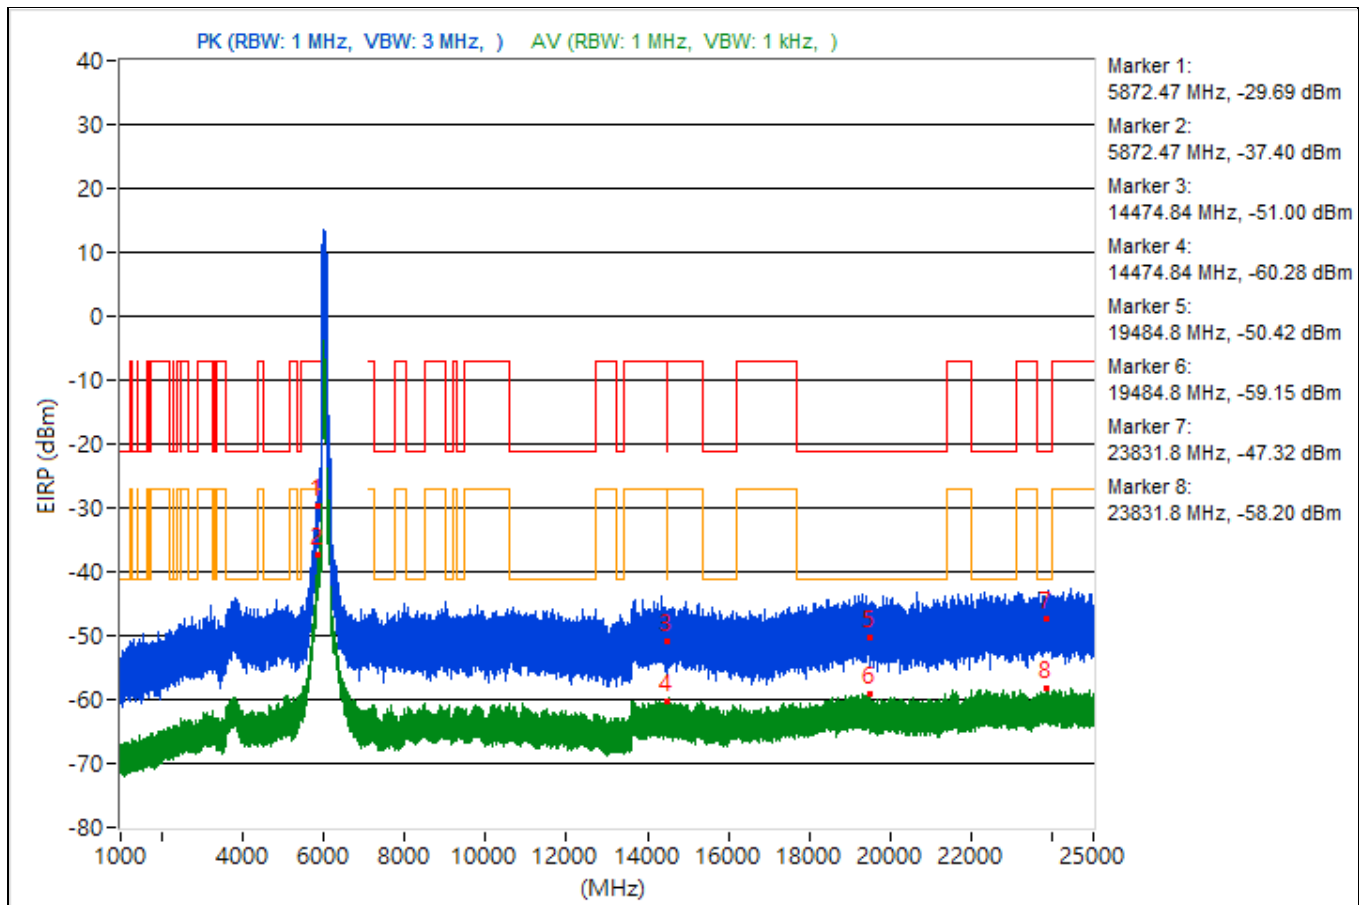


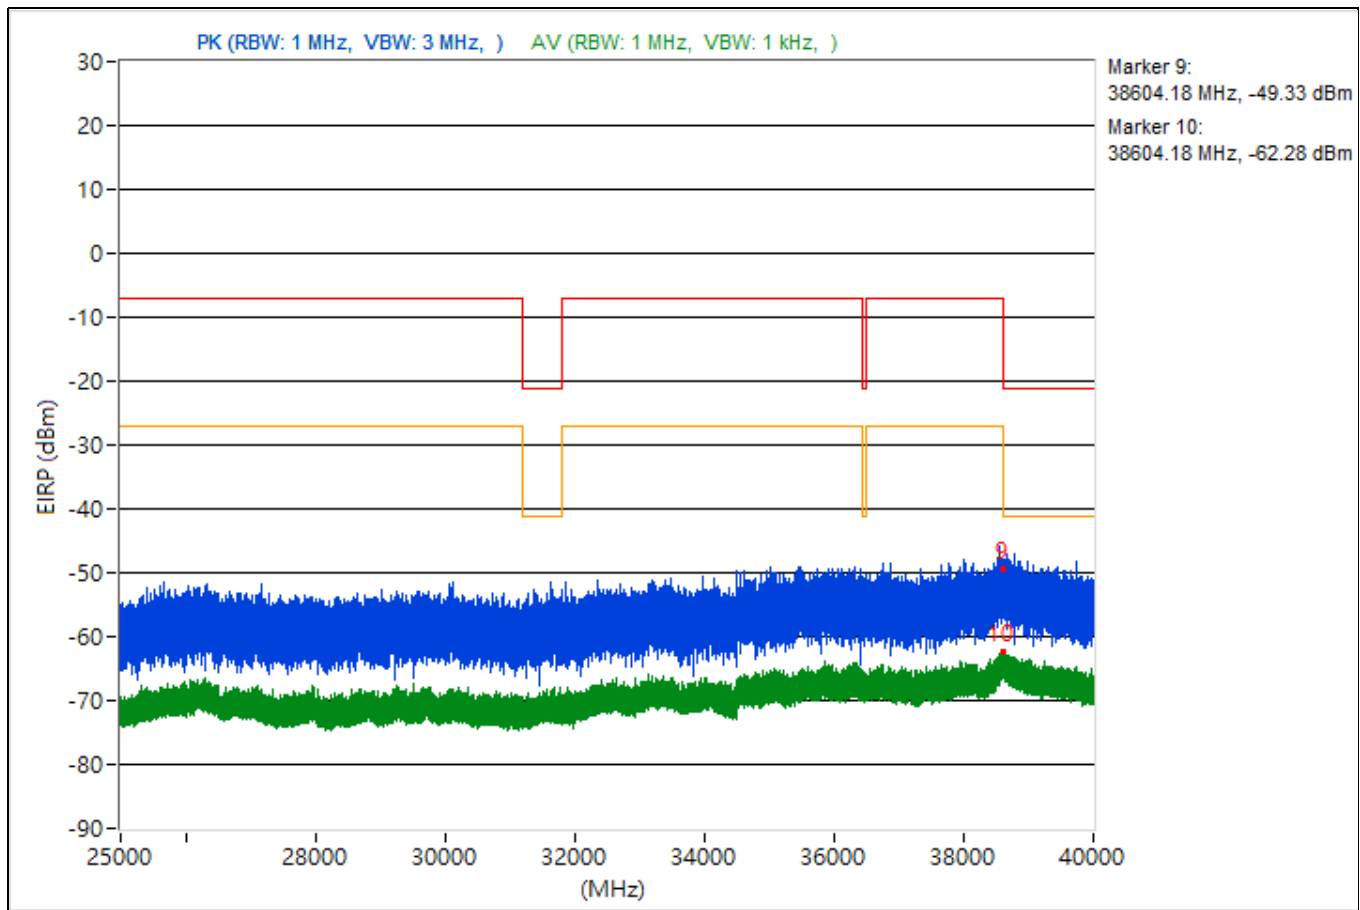


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3709.47	47.09 PK	74	-26.91	-53.09	4.92	-48.17
2	3709.47	35.96 AV	54	-18.04	-64.22	4.92	-59.3
3	14470.31	47.32 PK	74	-26.68	-52.86	4.92	-47.94
4	14470.31	35.27 AV	54	-18.73	-64.91	4.92	-59.99
5	21378.3	45.65 PK	74	-28.35	-54.53	4.92	-49.61
6	21378.3	36.54 AV	54	-17.46	-63.64	4.92	-58.72
7	23862.3	49.88 PK	74	-24.12	-50.3	4.92	-45.38
8	23862.3	37.67 AV	54	-16.33	-62.51	4.92	-57.59
9	38660.09	39.05 PK	74	-34.95	-61.13	4.92	-56.21
10	38660.09	33.08 AV	54	-20.92	-67.1	4.92	-62.18

Note: Margin value = Emission Level - Limit value

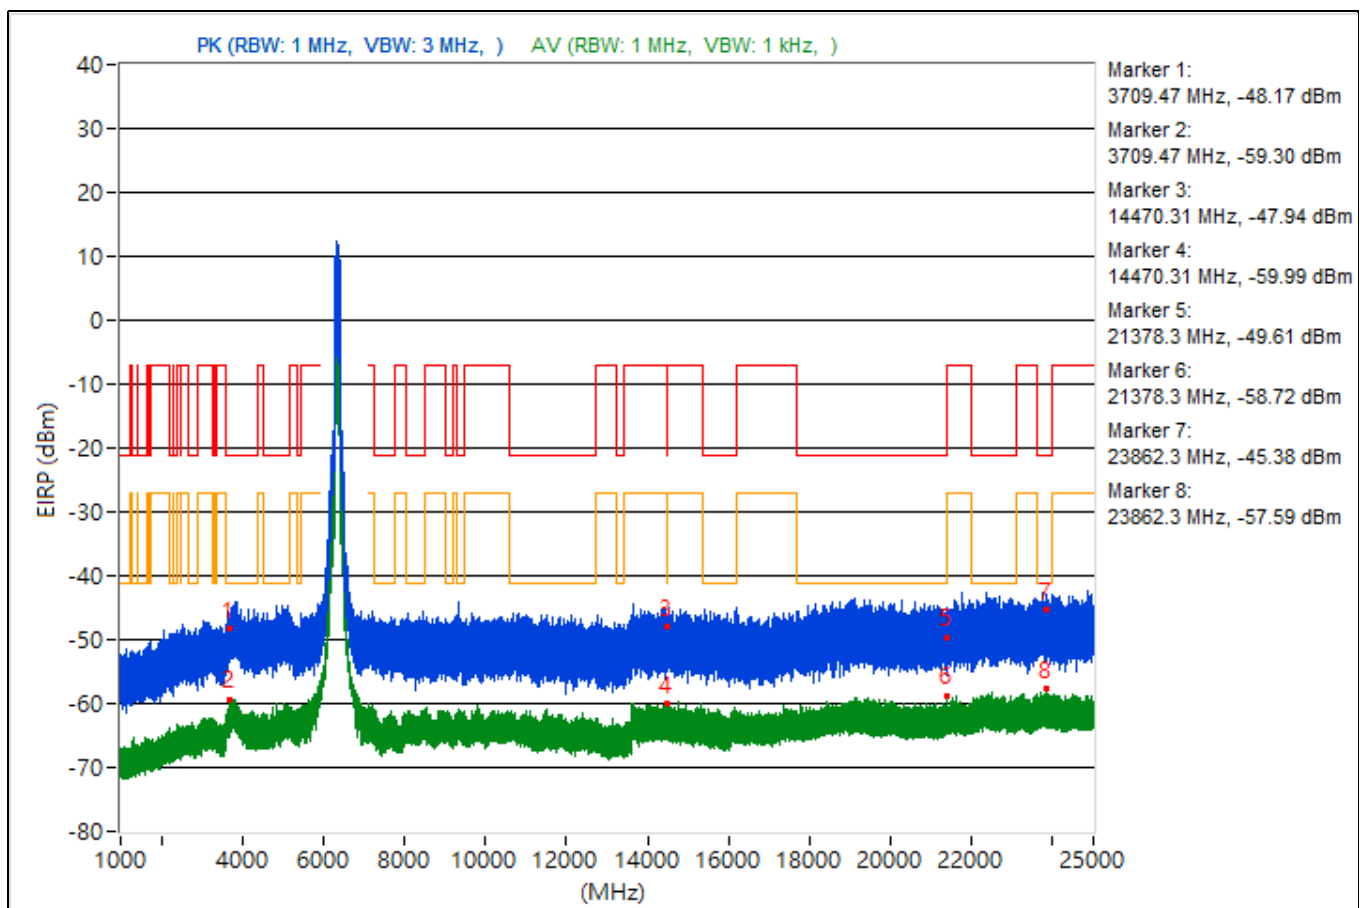


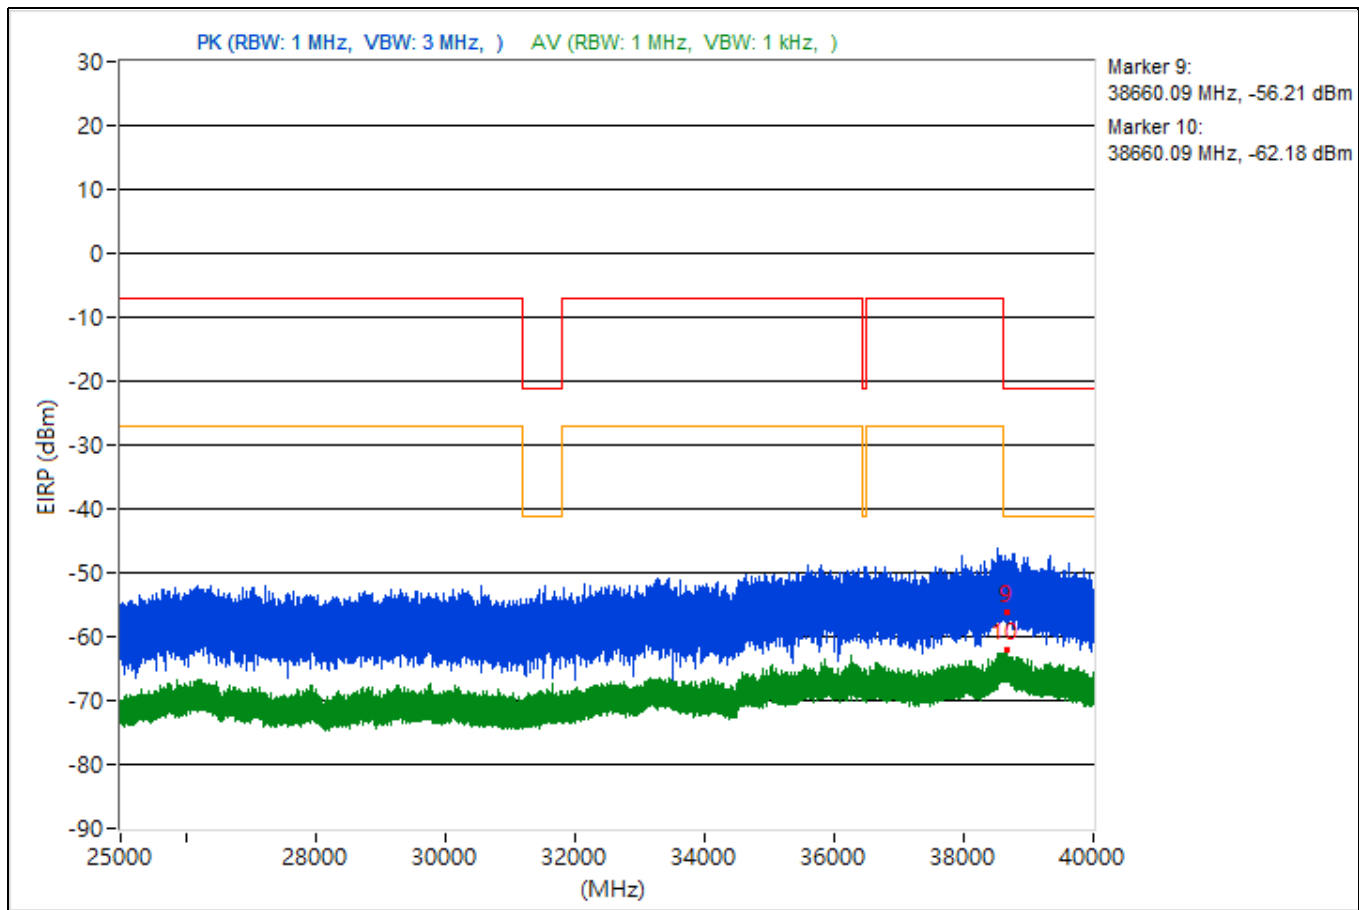


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.79	44.99 PK	74	-29.01	-55.19	4.92	-50.27
2	3815.79	36.63 AV	54	-17.37	-63.55	4.92	-58.63
3	7280.56	44.11 PK	74	-29.89	-56.07	4.92	-51.15
4	7280.56	35.12 AV	54	-18.88	-65.06	4.92	-60.14
5	18924.1	47.92 PK	74	-26.08	-52.26	4.92	-47.34
6	18924.1	36.52 AV	54	-17.48	-63.66	4.92	-58.74
7	23831.3	44.61 PK	74	-29.39	-55.57	4.92	-50.65
8	23831.3	37.53 AV	54	-16.47	-62.65	4.92	-57.73
9	38666.93	45.8 PK	74	-28.2	-54.38	4.92	-49.46
10	38666.93	33.25 AV	54	-20.75	-66.93	4.92	-62.01

Note: Margin value = Emission Level - Limit value

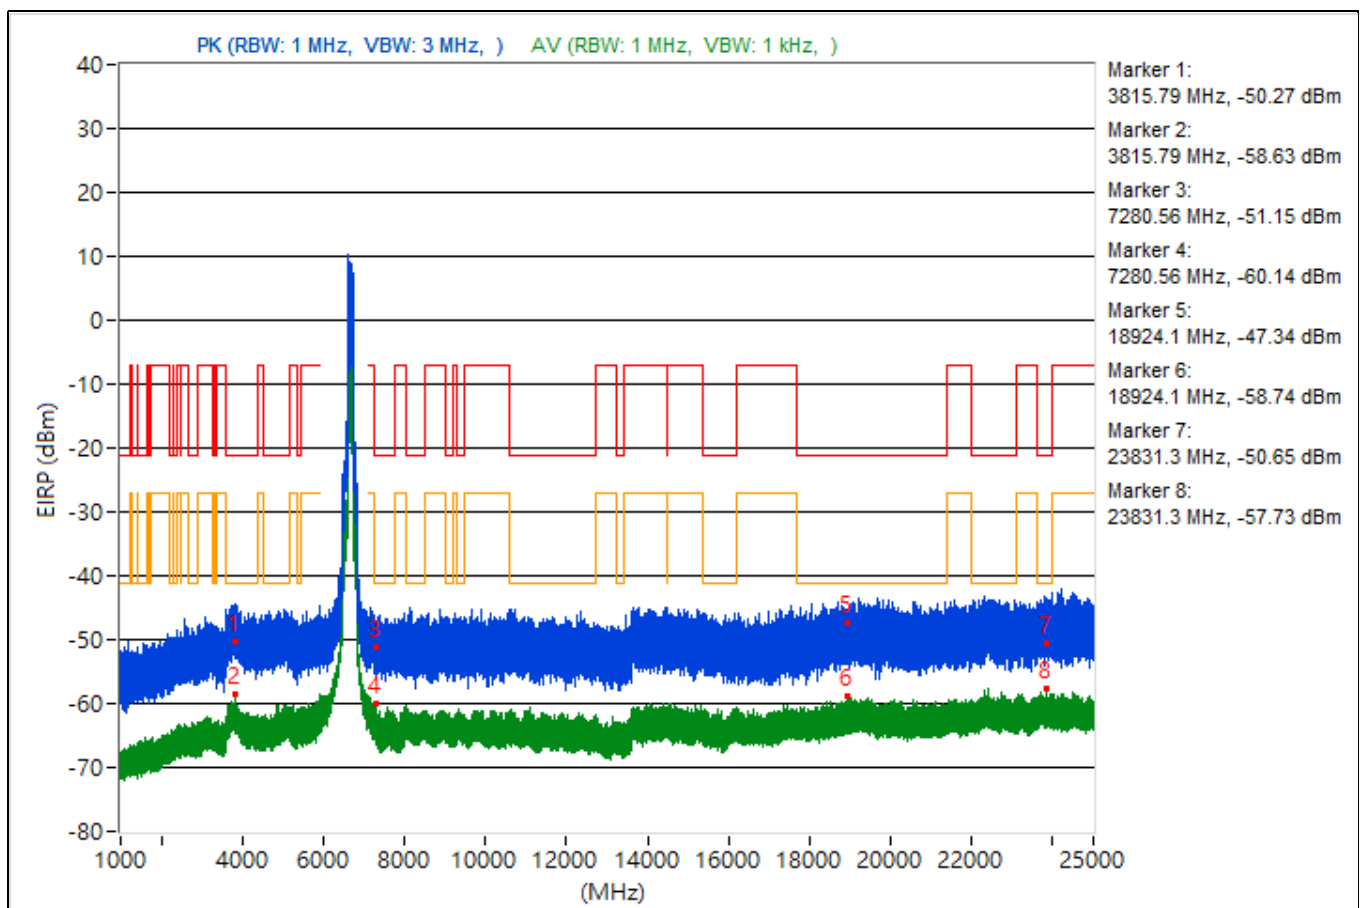

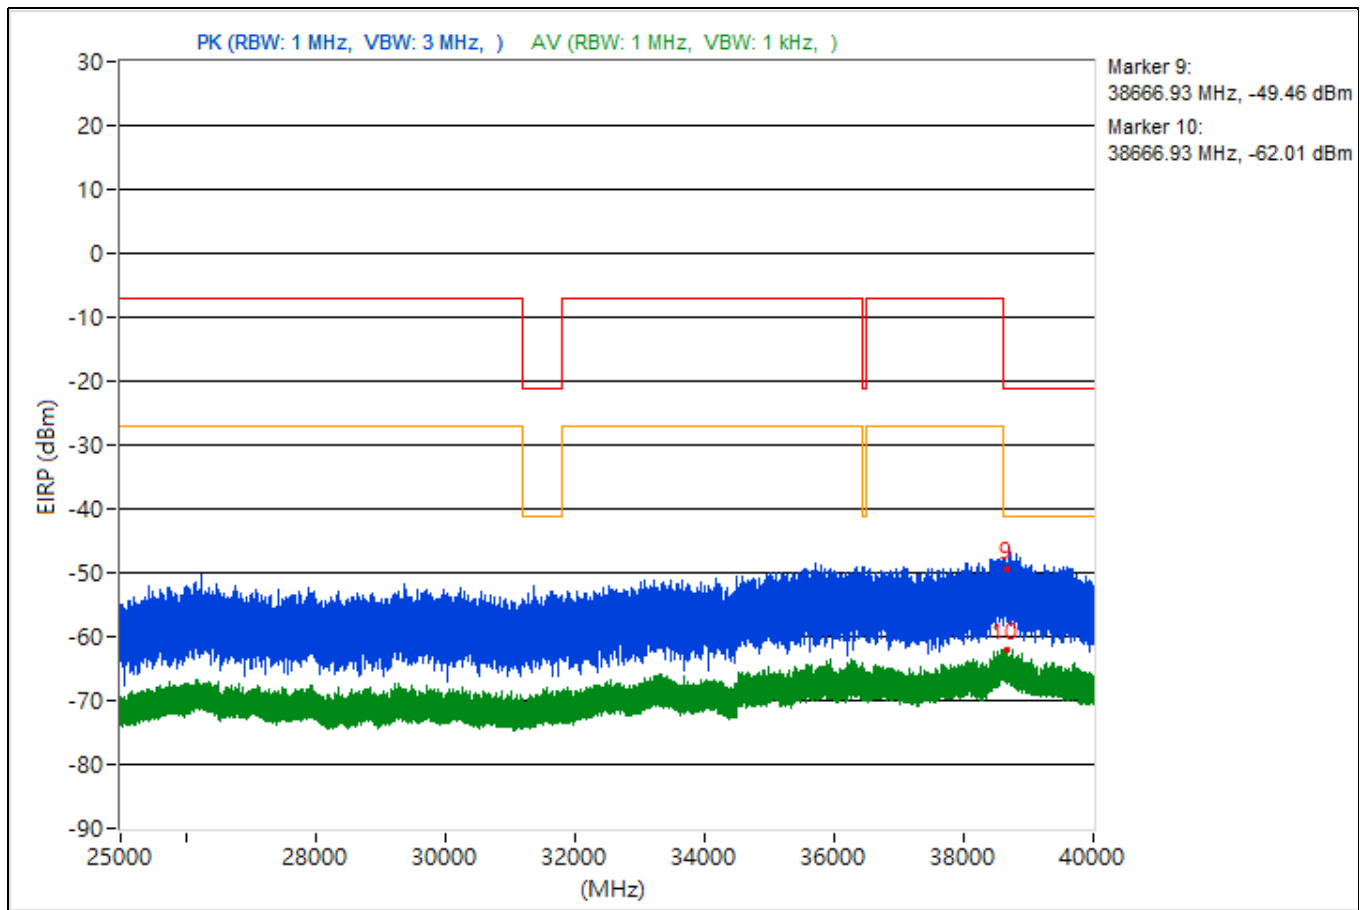


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5930.95	106.46 PK			6.44	4.76	11.2
2	*5930.95	101.08 AV			1.06	4.76	5.82
3	#5924.98	79.78 PK	88.26	-8.48	-20.24	4.76	-15.48
4	#5924.98	67.82 AV	68.26	-0.44	-32.2	4.76	-27.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

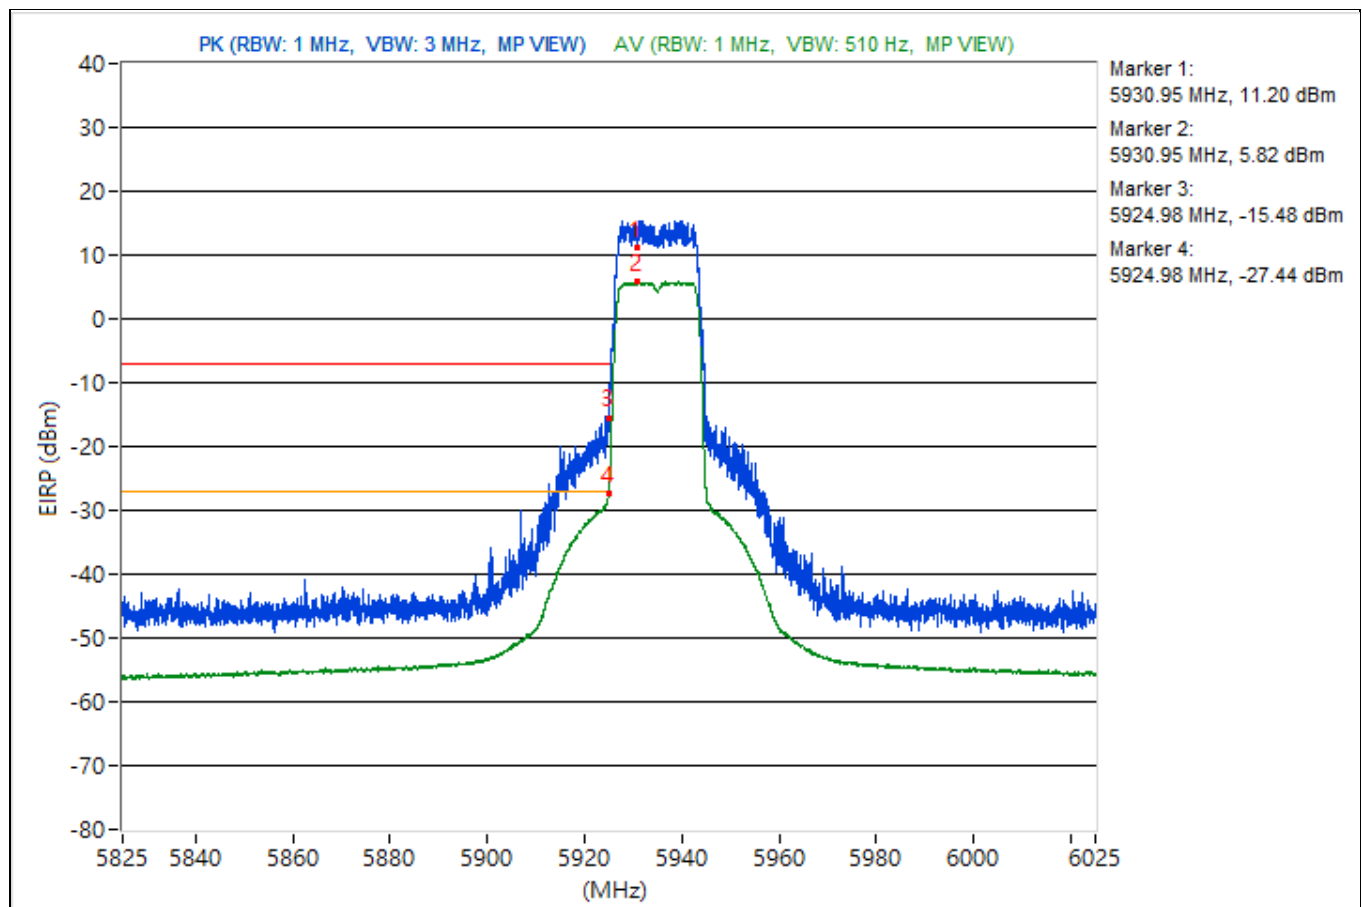


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954	118.83 PK			18.81	4.76	23.57
2	*5954	110.55 AV			10.53	4.76	15.29
3	#5924.98	67.49 PK	88.26	-20.77	-32.53	4.76	-27.77
4	#5924.98	57.71 AV	68.26	-10.55	-42.31	4.76	-37.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

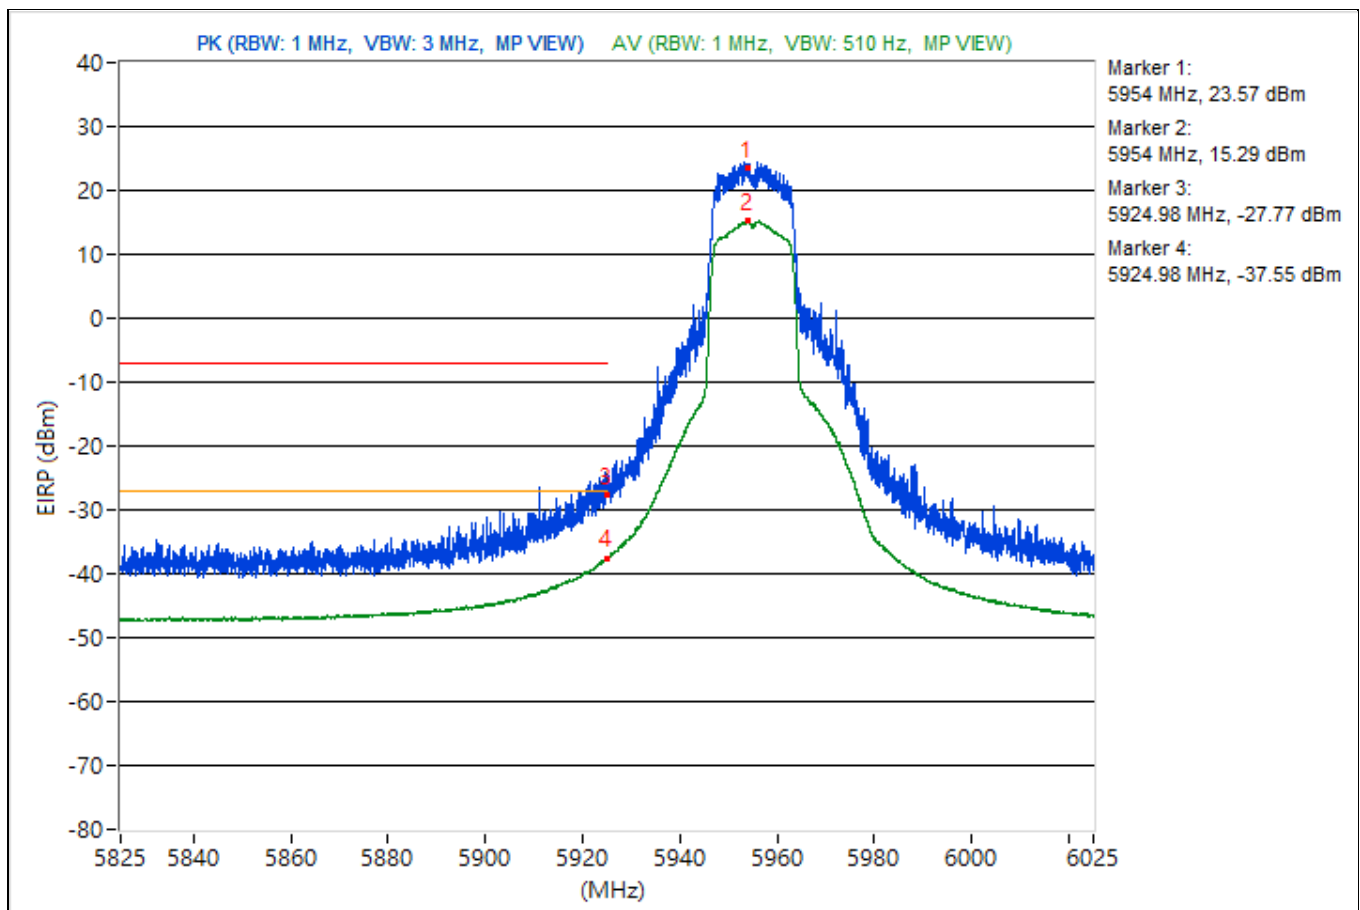


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.9	99.12 PK			-0.9	4.76	3.86
2	*5933.9	89.92 AV			-10.1	4.76	-5.34
3	#5924.98	87.77 PK	88.26	-0.49	-12.25	4.76	-7.49
4	!#5924.98	77.6 AV	68.26	9.34	-22.42	4.76	-17.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

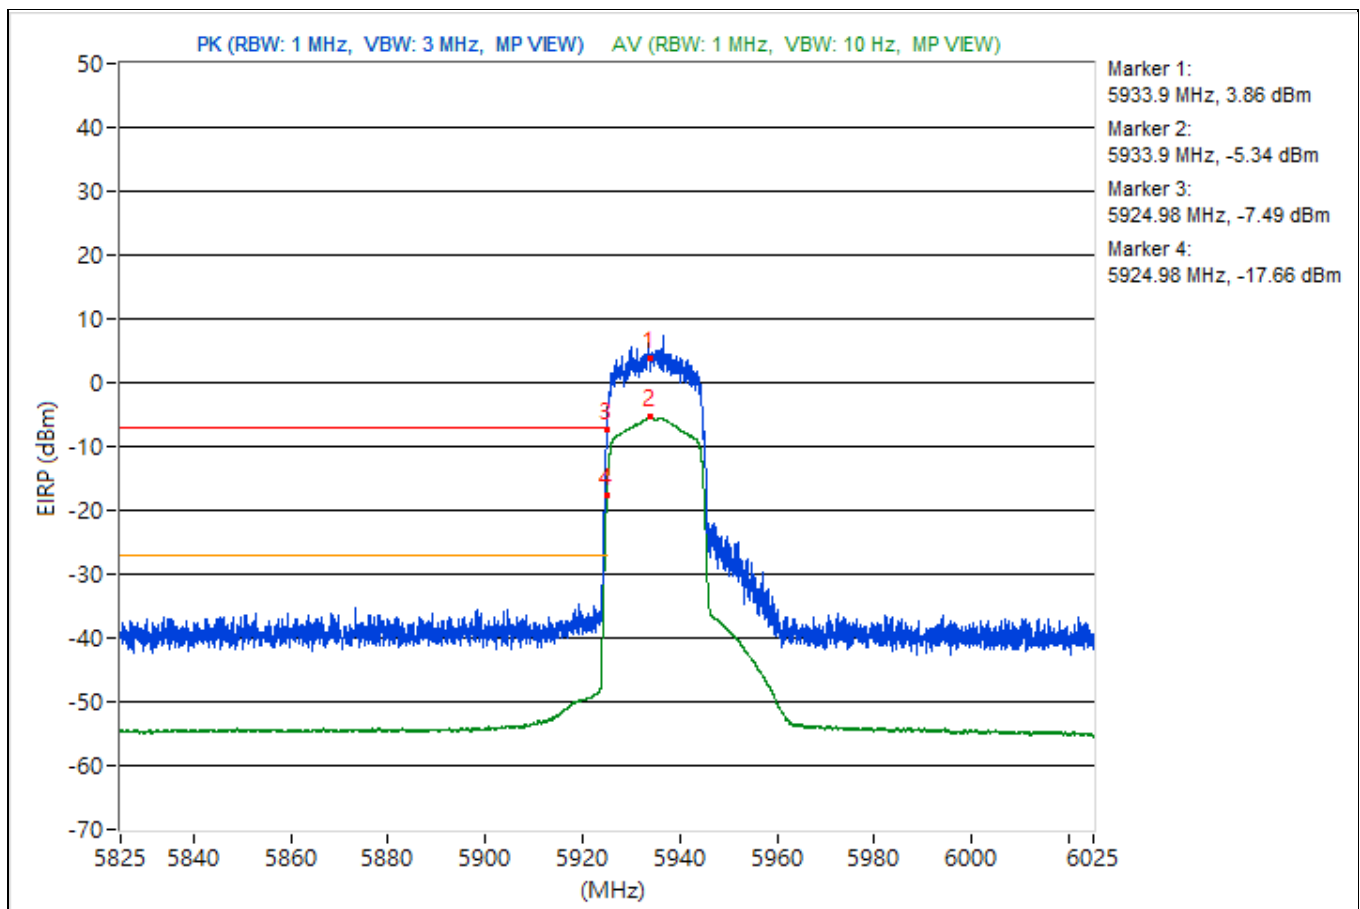


For Integration method:

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	50.17 AV	68.2	-18.03	-49.85	4.76	-45.09

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

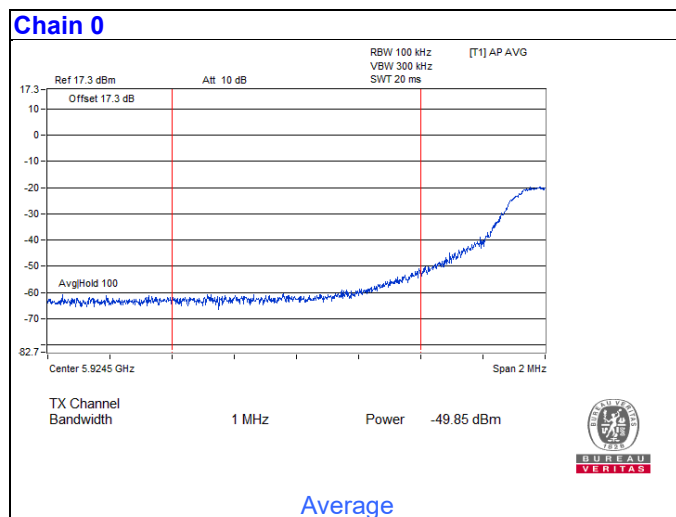


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.85	118.45 PK			18.43	4.76	23.19
2	*5953.85	109 AV			8.98	4.76	13.74
3	#5924.95	70.08 PK	88.26	-18.18	-29.94	4.76	-25.18
4	#5924.95	58.13 AV	68.26	-10.13	-41.89	4.76	-37.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

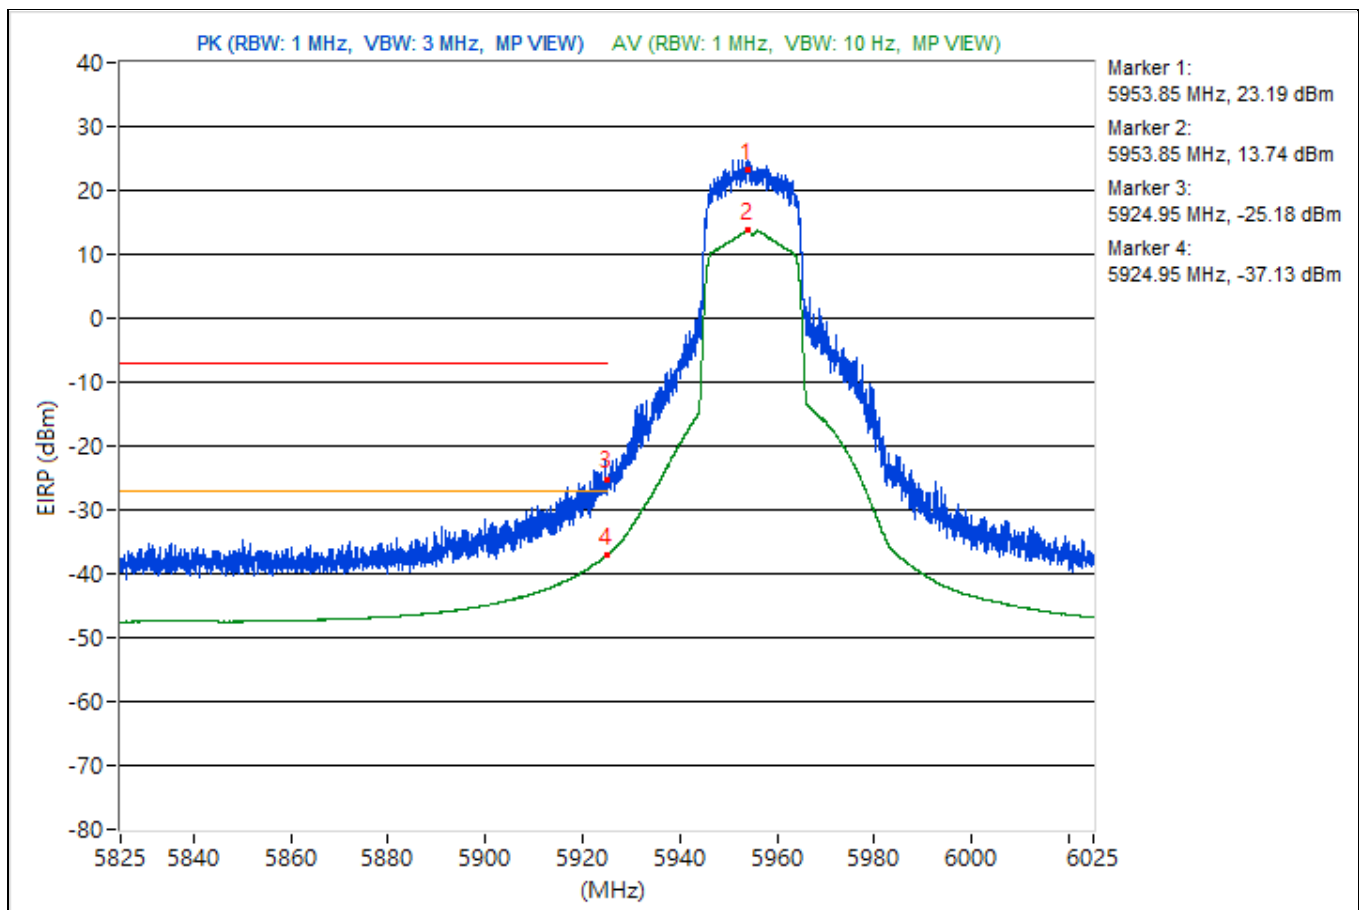


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5963.55	115.4 PK			15.38	4.76	20.14
2	*5963.55	106.69 AV			6.67	4.76	11.43
3	#5924.93	79.2 PK	88.26	-9.06	-20.82	4.76	-16.06
4	#5924.93	67.15 AV	68.26	-1.11	-32.87	4.76	-28.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

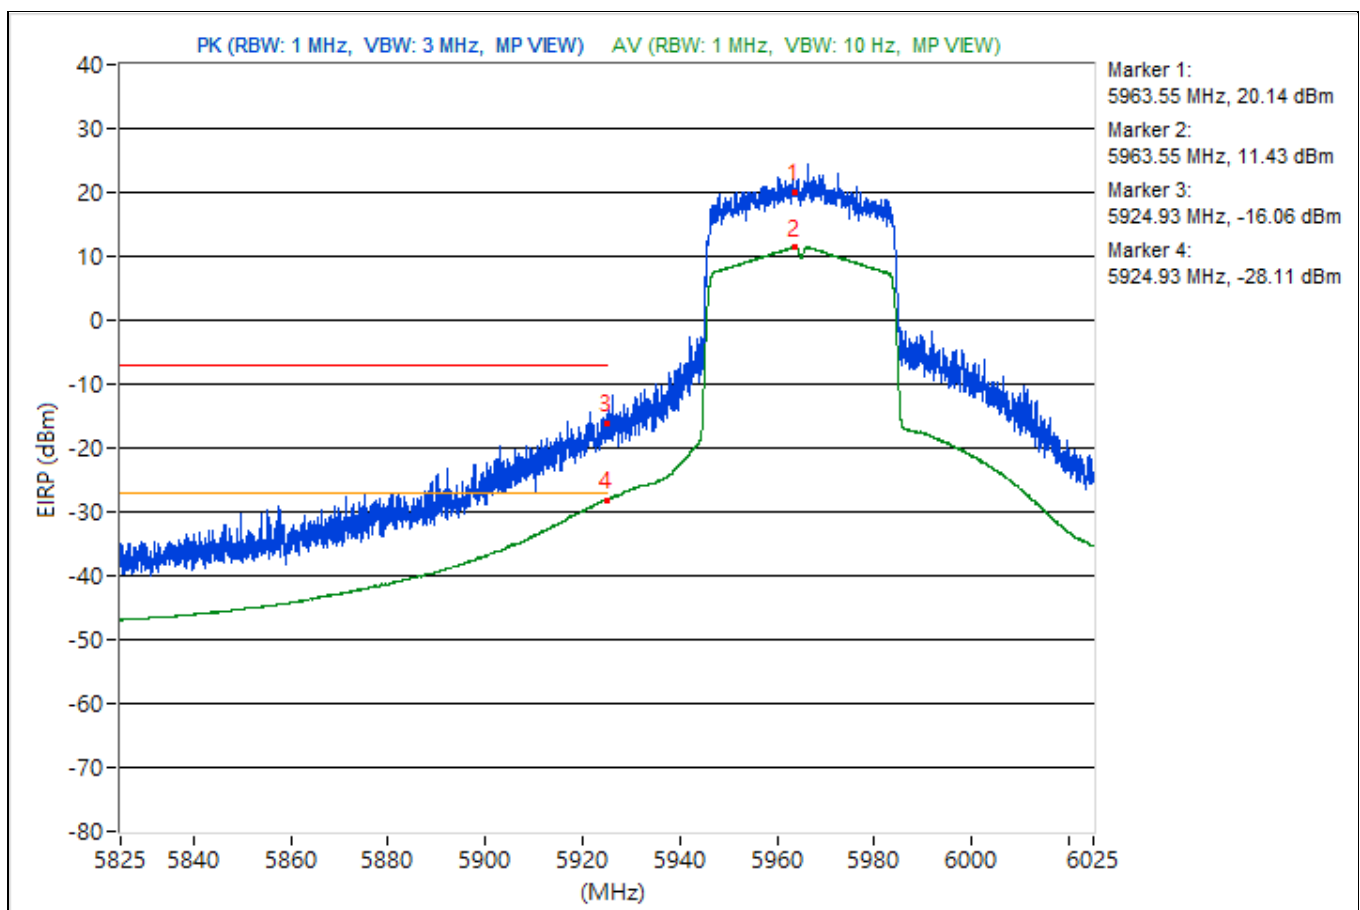


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5983.05	110.51 PK			10.49	4.76	15.25
2	*5983.05	102.69 AV			2.67	4.76	7.43
3	#5909.1	67.99 PK	88.26	-20.27	-32.03	4.76	-27.27
4	#5909.1	58.67 AV	68.26	-9.59	-41.35	4.76	-36.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

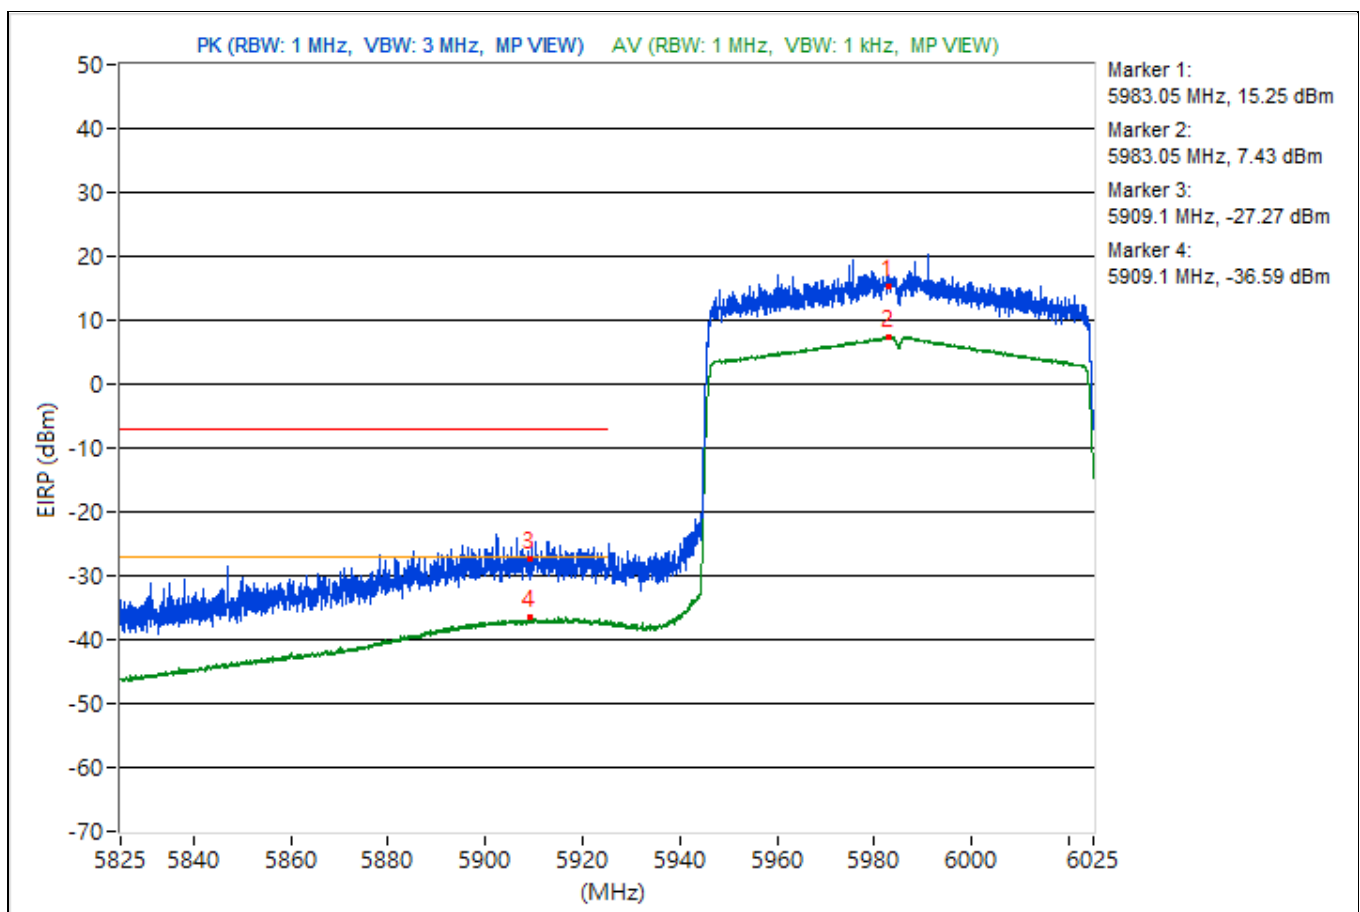


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6021	108.32 PK			8.3	4.76	13.06
2	*6021	99.17 AV			-0.85	4.76	3.91
3	#5922.4	73.31 PK	88.26	-14.95	-26.71	4.76	-21.95
4	#5922.4	62.63 AV	68.26	-5.63	-37.39	4.76	-32.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

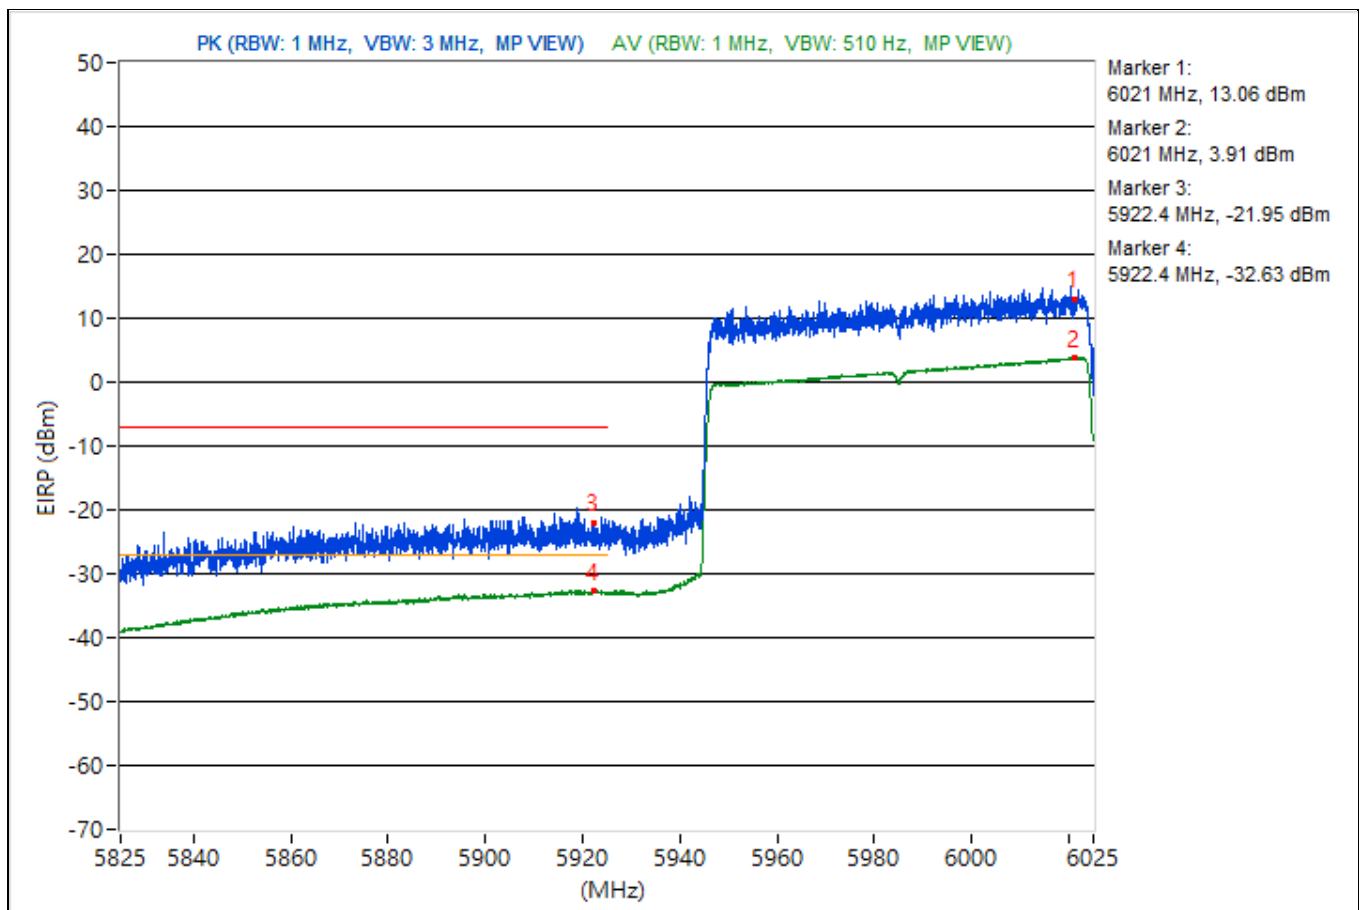


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.2	95.31 PK			-4.71	4.76	0.05
2	*5926.2	89.14 AV			-10.88	4.76	-6.12
3	#5924.98	87.88 PK	88.26	-0.38	-12.14	4.76	-7.38
4	!#5924.98	79.23 AV	68.26	10.97	-20.79	4.76	-16.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

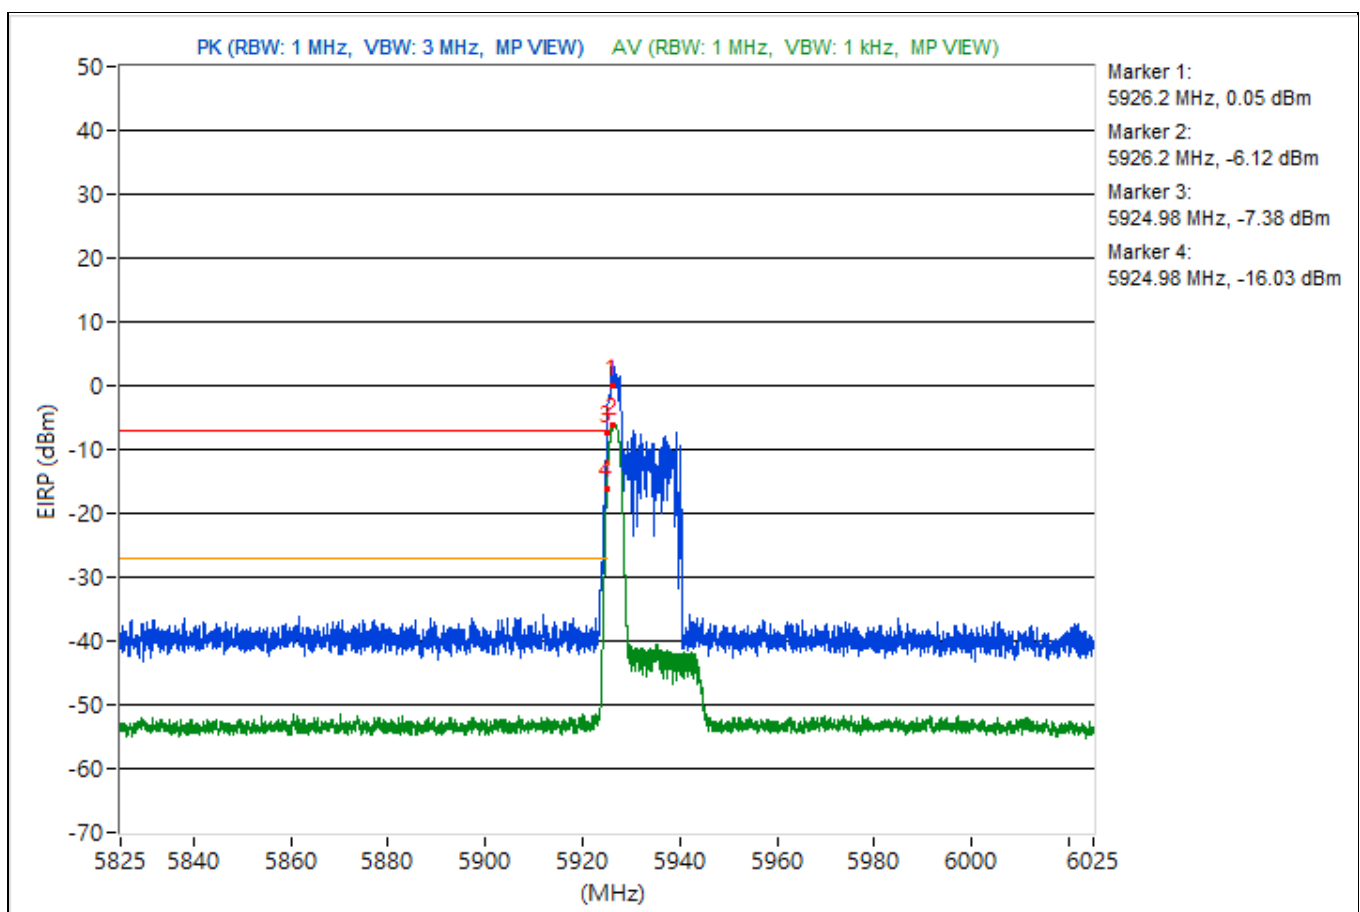


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	56.67 AV	68.2	-11.53	-43.35	4.76	-38.59

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

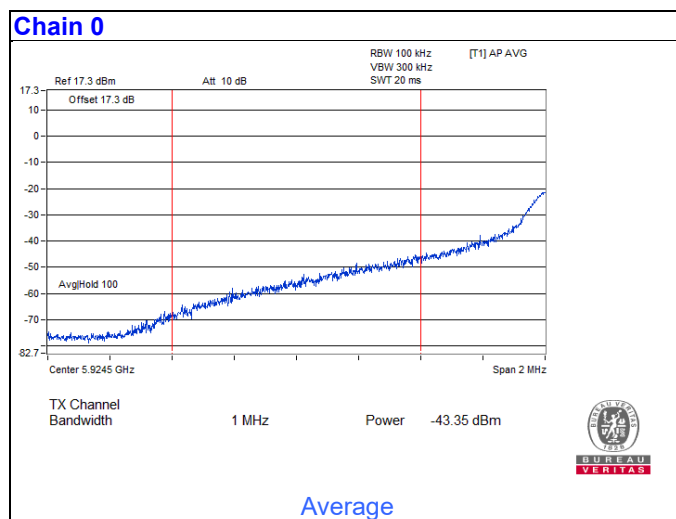


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.43	120.63 PK			20.61	4.76	25.37
2	*5946.43	112.04 AV			12.02	4.76	16.78
3	#5921.45	58.62 PK	88.26	-29.64	-41.4	4.76	-36.64
4	#5921.45	47.9 AV	68.26	-20.36	-52.12	4.76	-47.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

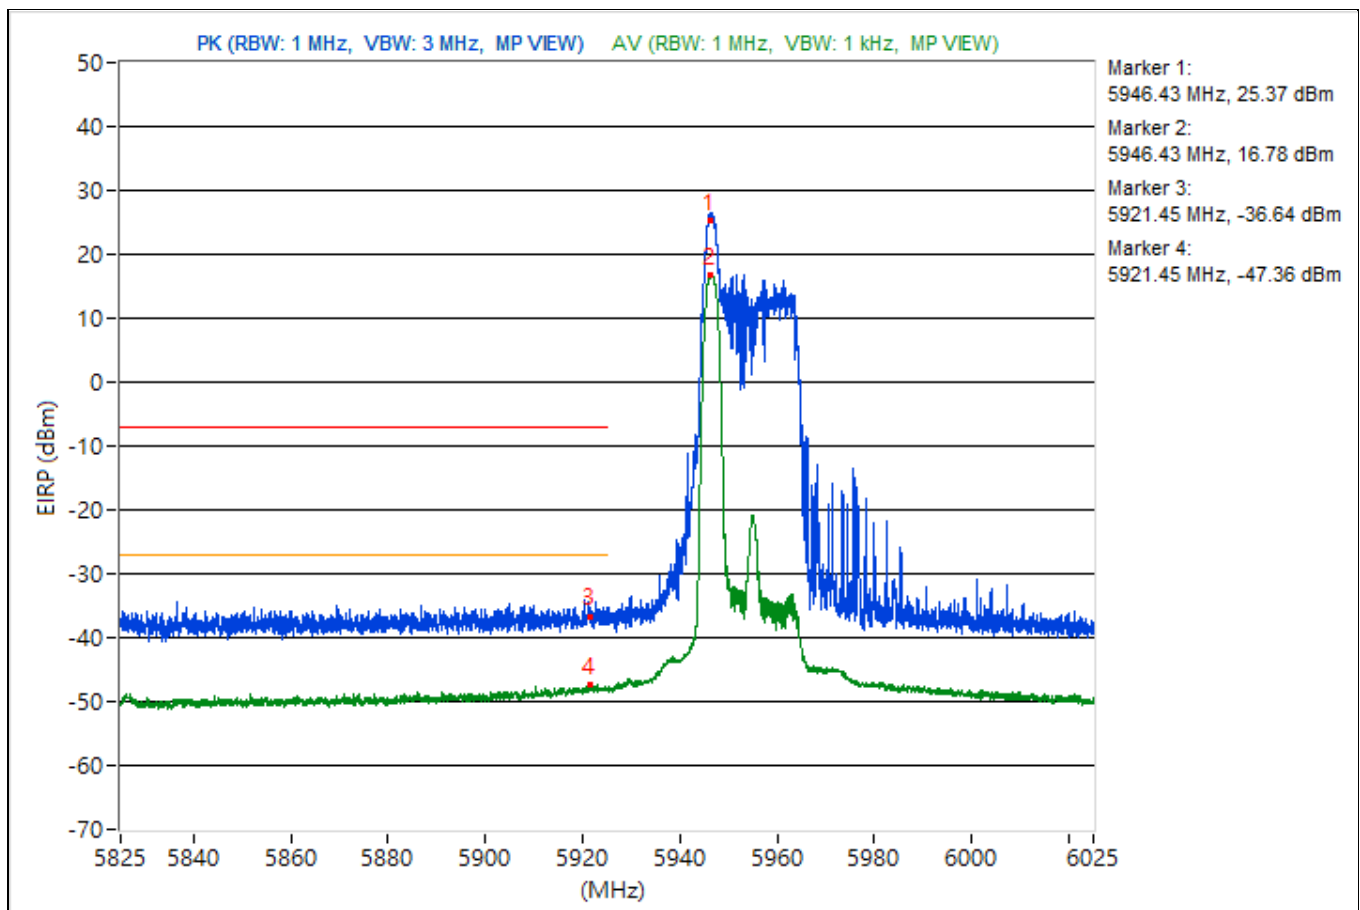


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5928.23	96.01 PK			-4.01	4.76	0.75
2	*5928.23	88.43 AV			-11.59	4.76	-6.83
3	#5924.98	88.05 PK	88.26	-0.21	-11.97	4.76	-7.21
4	!5924.98	78.23 AV	68.26	9.97	-21.79	4.76	-17.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

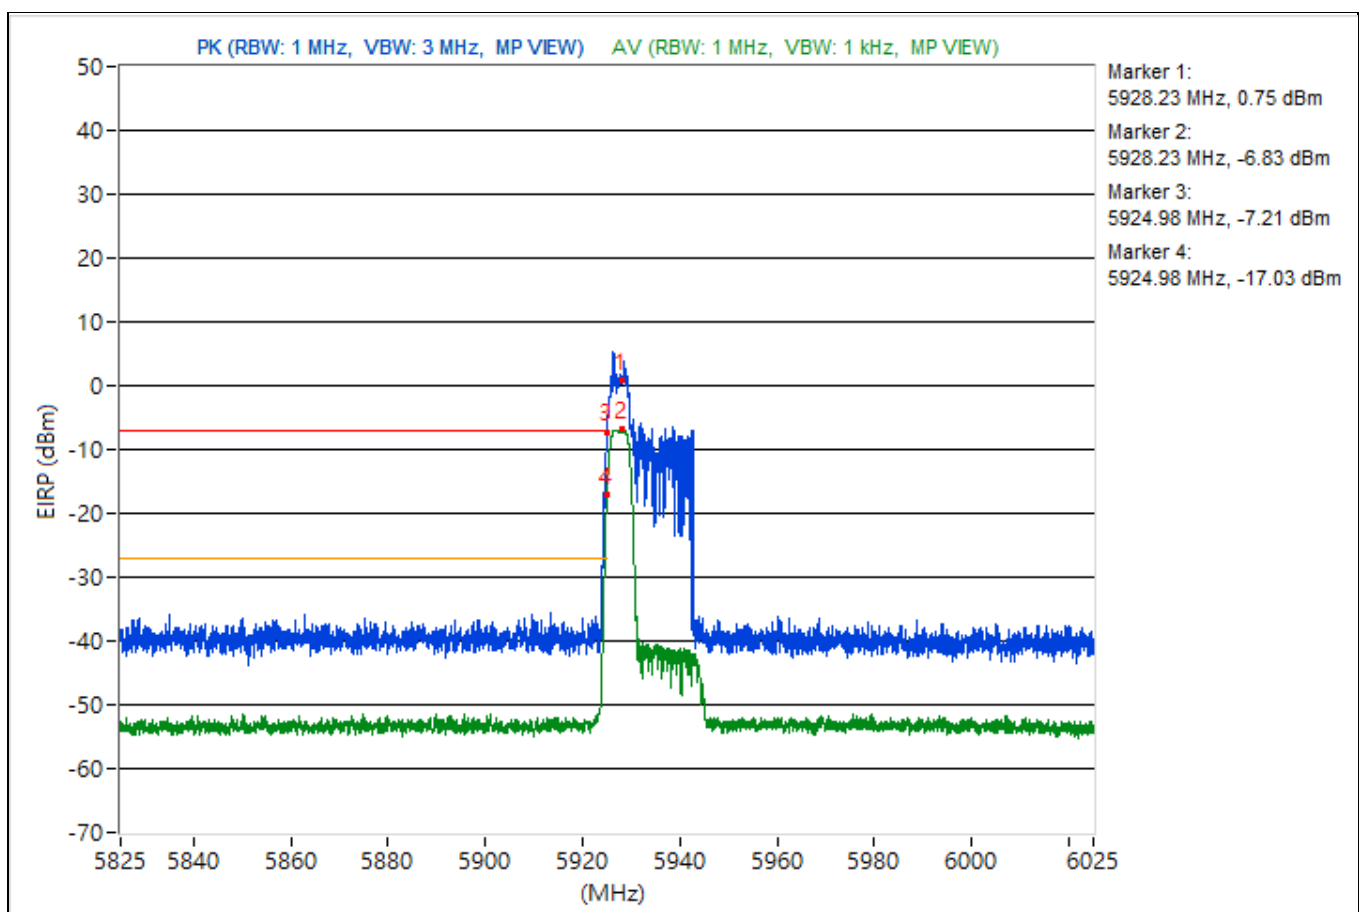


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	55.88 AV	68.2	-12.32	-44.14	4.76	-39.38

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

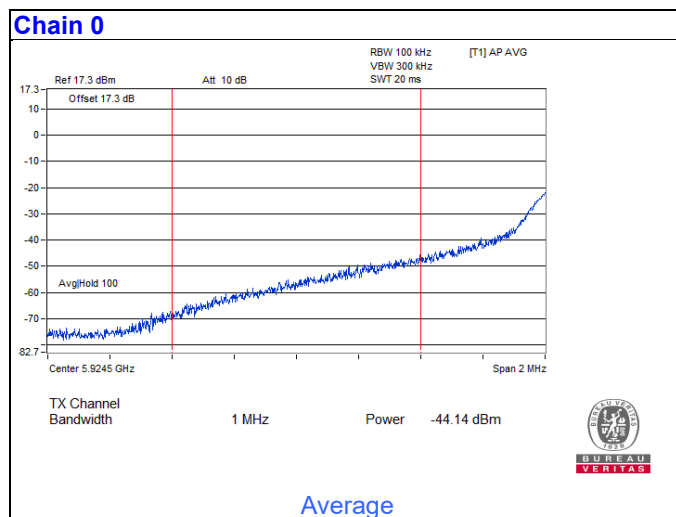


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.32	121.41 PK			21.39	4.76	26.15
2	*5947.32	112.54 AV			12.52	4.76	17.28
3	#5922.23	58.98 PK	88.26	-29.28	-41.04	4.76	-36.28
4	#5922.23	49.3 AV	68.26	-18.96	-50.72	4.76	-45.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

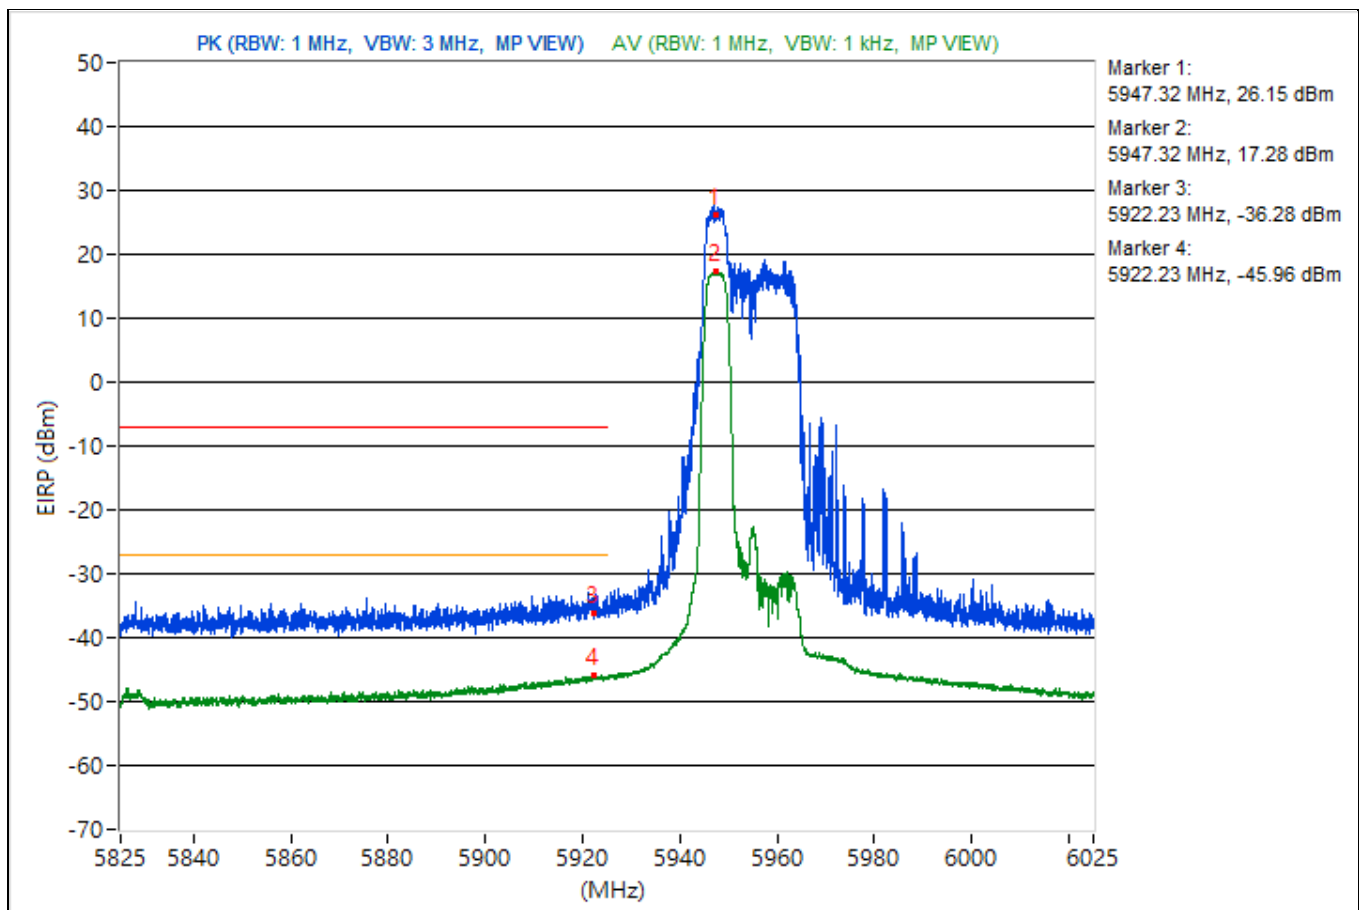


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5931.35	95.88 PK			-4.14	4.76	0.62
2	*5931.35	87.84 AV			-12.18	4.76	-7.42
3	#5924.98	88.11 PK	88.26	-0.15	-11.91	4.76	-7.15
4	!5924.98	78.84 AV	68.26	10.58	-21.18	4.76	-16.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

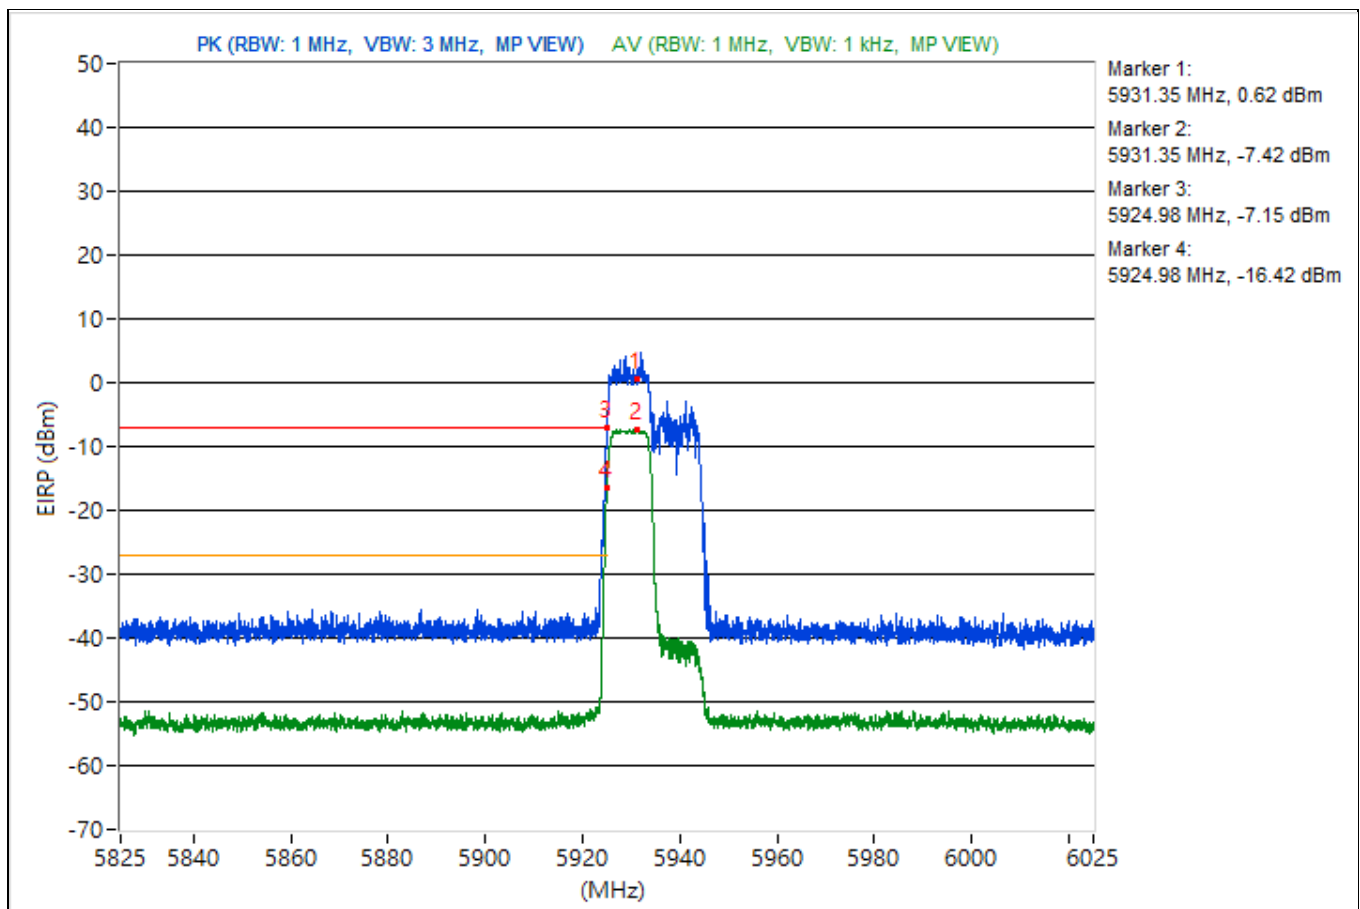


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	56.5 AV	68.2	-11.7	-43.52	4.76	-38.76

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

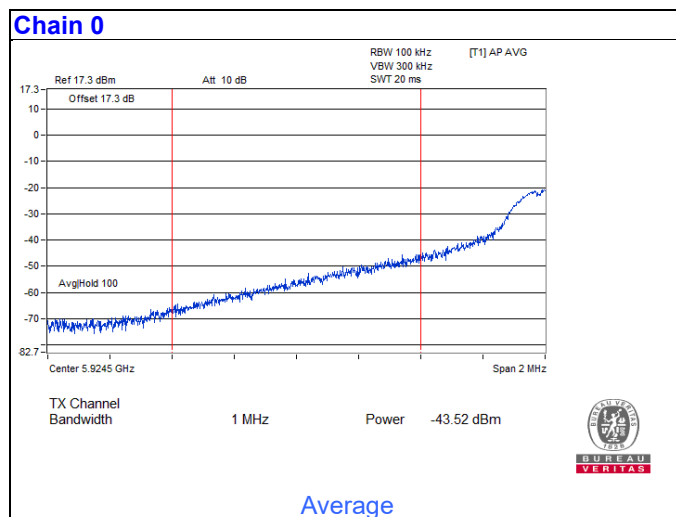


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.48	120.67 PK			20.65	4.76	25.41
2	*5951.48	111.72 AV			11.7	4.76	16.46
3	#5924.37	66.87 PK	88.26	-21.39	-33.15	4.76	-28.39
4	#5924.37	53.23 AV	68.26	-15.03	-46.79	4.76	-42.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

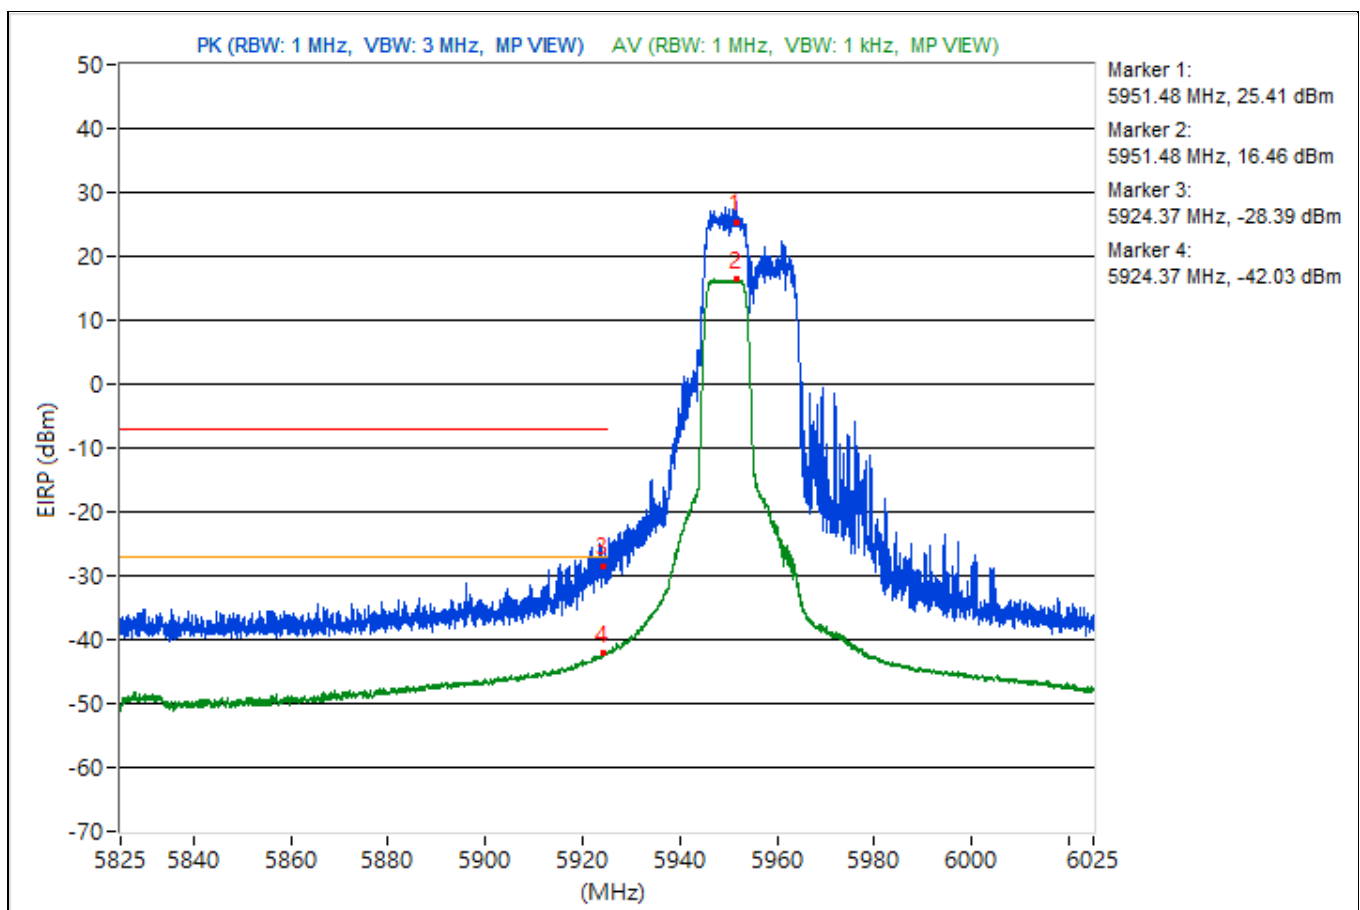


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5931.1	113.48 PK			13.46	4.76	18.22
2	*5931.1	106.26 AV			6.24	4.76	11
3	#5924.95	87.26 PK	88.26	-1	-12.76	4.76	-8
4	#5924.95	58.19 AV	68.26	-10.07	-41.83	4.76	-37.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

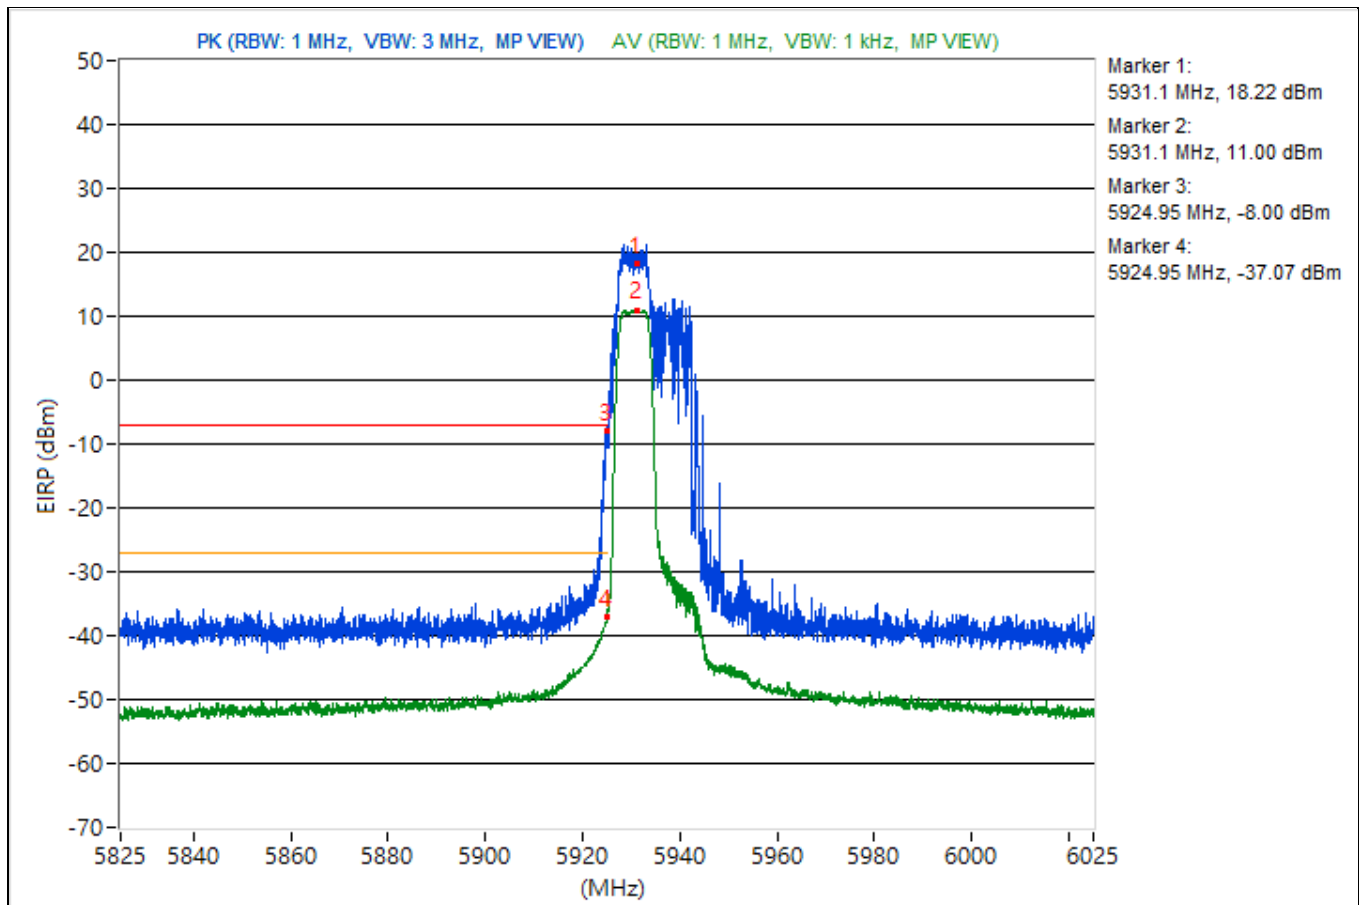


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5950.82	120.97 PK			20.95	4.76	25.71
2	*5950.82	111.71 AV			11.69	4.76	16.45
3	#5924.62	61.16 PK	88.26	-27.1	-38.86	4.76	-34.1
4	#5924.62	49.64 AV	68.26	-18.62	-50.38	4.76	-45.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

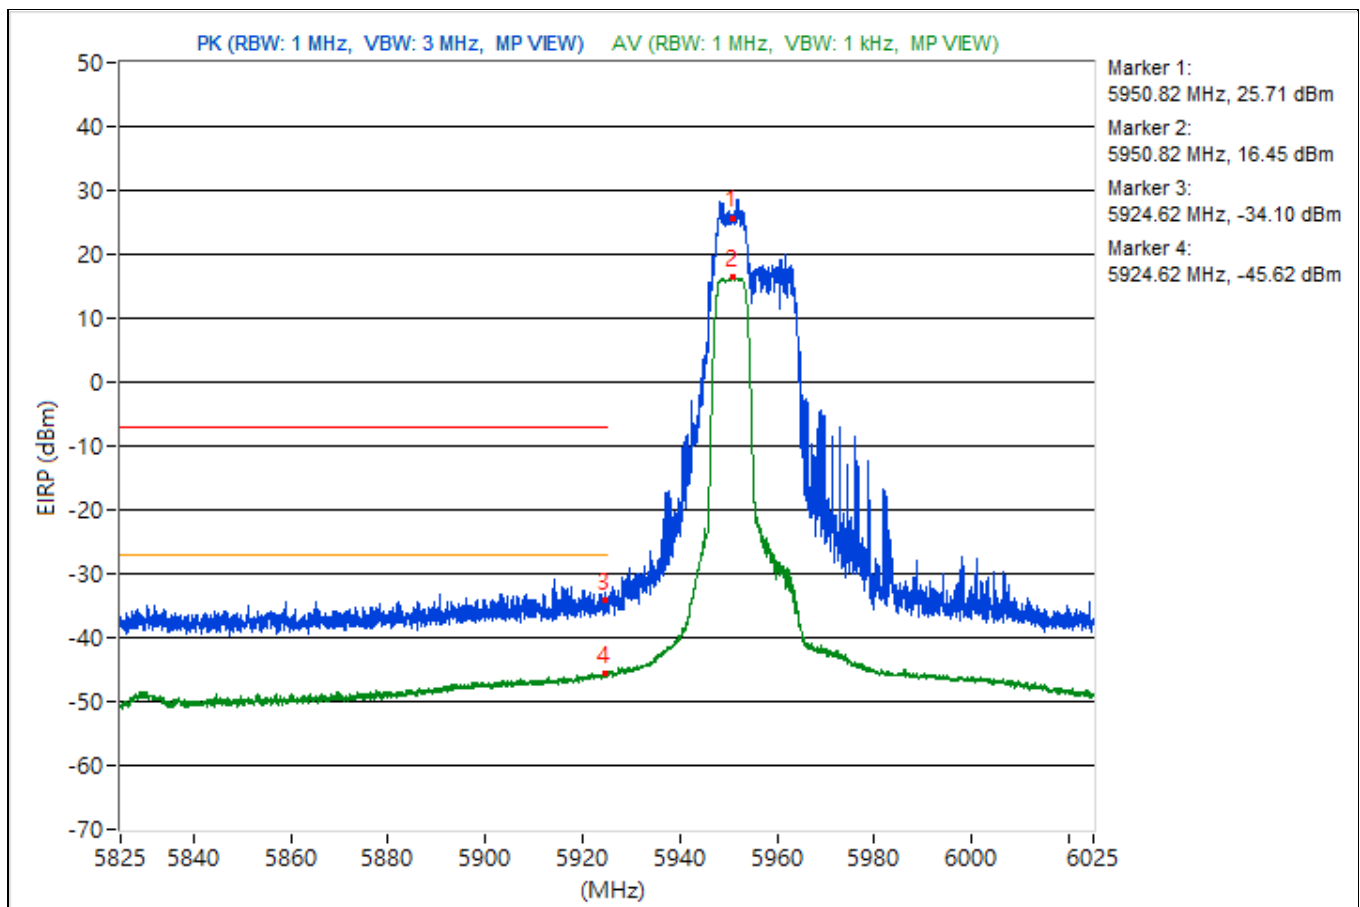


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.87	97.63 PK			-2.39	4.76	2.37
2	*5933.87	91.88 AV			-8.14	4.76	-3.38
3	#5924.98	87.41 PK	88.26	-0.85	-12.61	4.76	-7.85
4	!#5924.98	79.01 AV	68.26	10.75	-21.01	4.76	-16.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

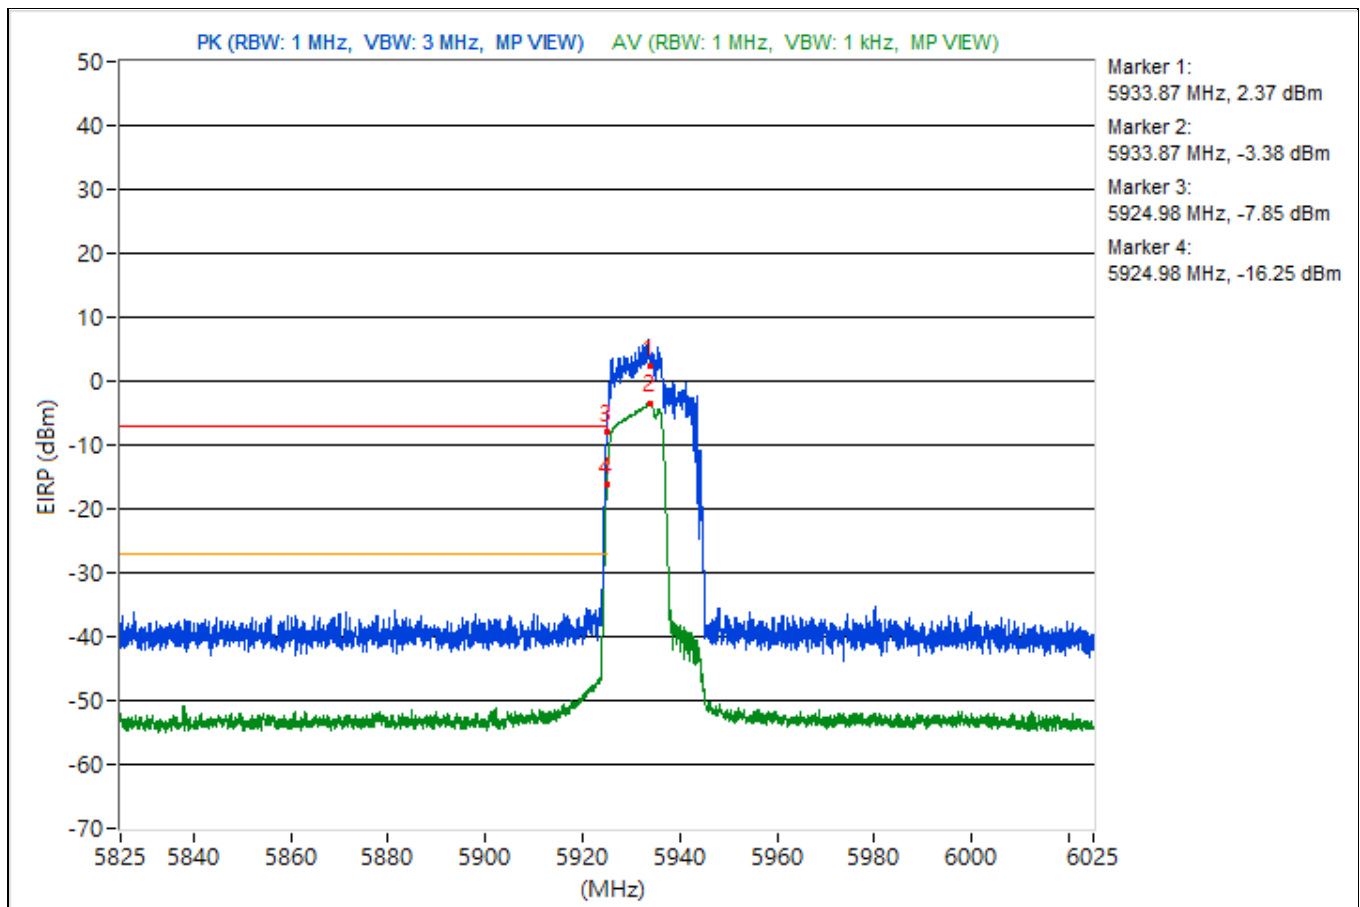


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	49.21 AV	68.2	-18.99	-50.81	4.76	-46.05

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

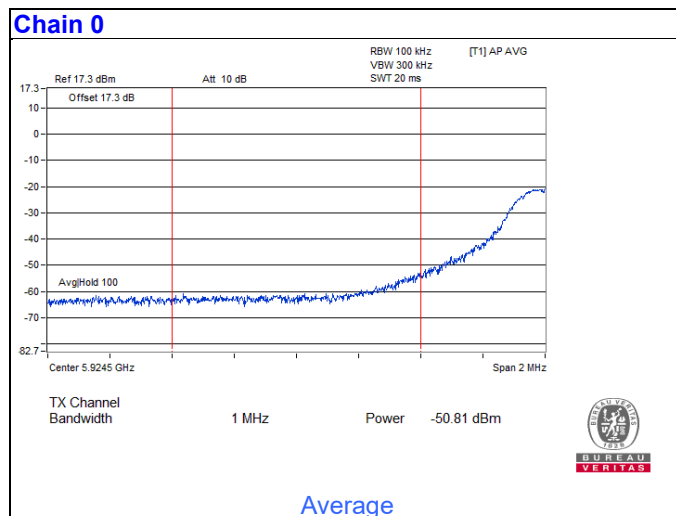


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.87	120.35 PK			20.33	4.76	25.09
2	*5953.87	110.91 AV			10.89	4.76	15.65
3	#5923.82	63.65 PK	88.26	-24.61	-36.37	4.76	-31.61
4	#5923.82	51.81 AV	68.26	-16.45	-48.21	4.76	-43.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

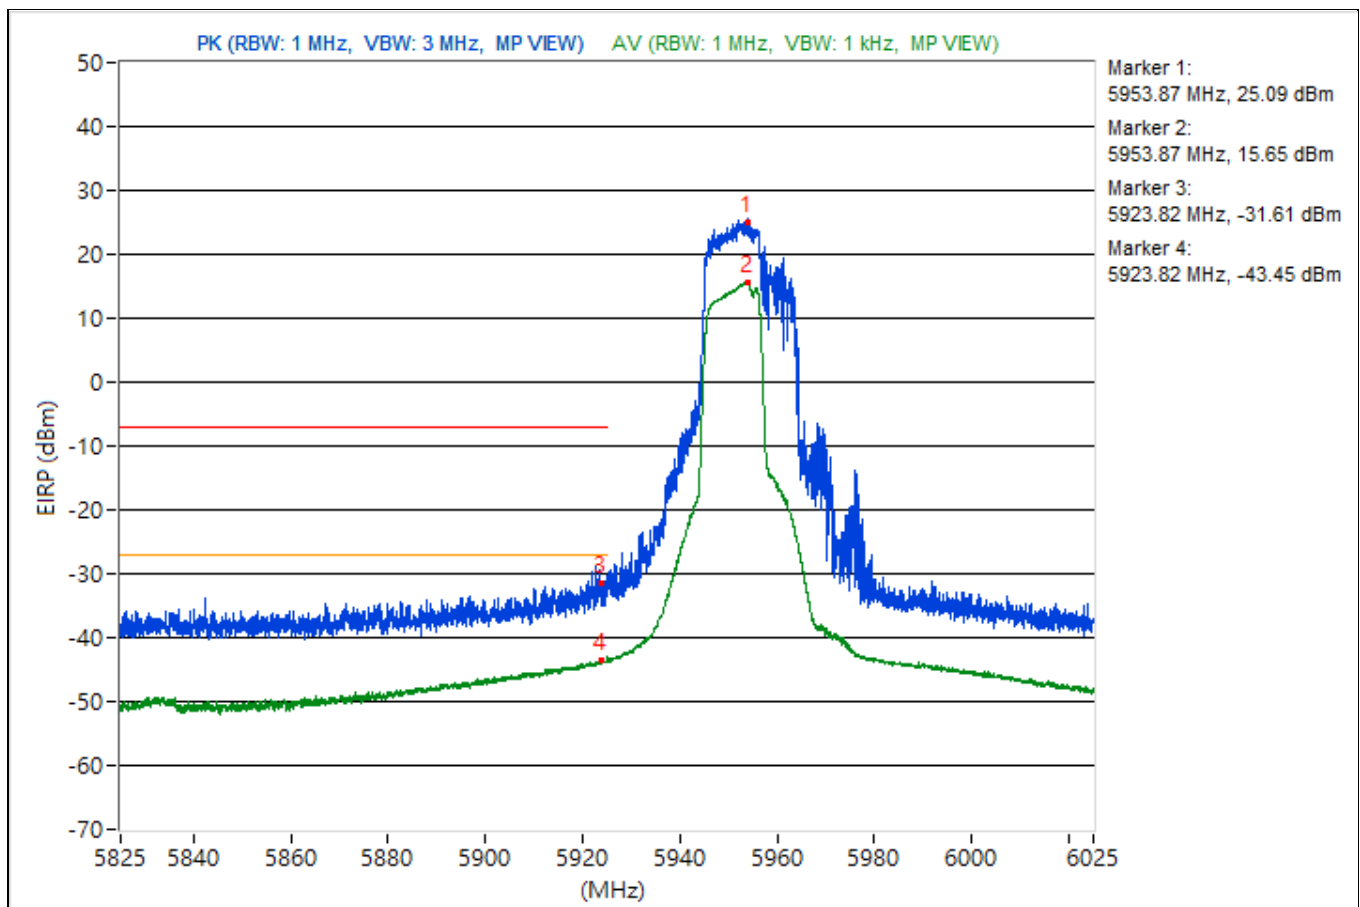


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5988.27	113.03 PK			13.01	4.76	17.77
2	*5988.27	102.21 AV			2.19	4.76	6.95
3	#5924.12	66.11 PK	88.26	-22.15	-33.91	4.76	-29.15
4	#5924.12	56.8 AV	68.26	-11.46	-43.22	4.76	-38.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

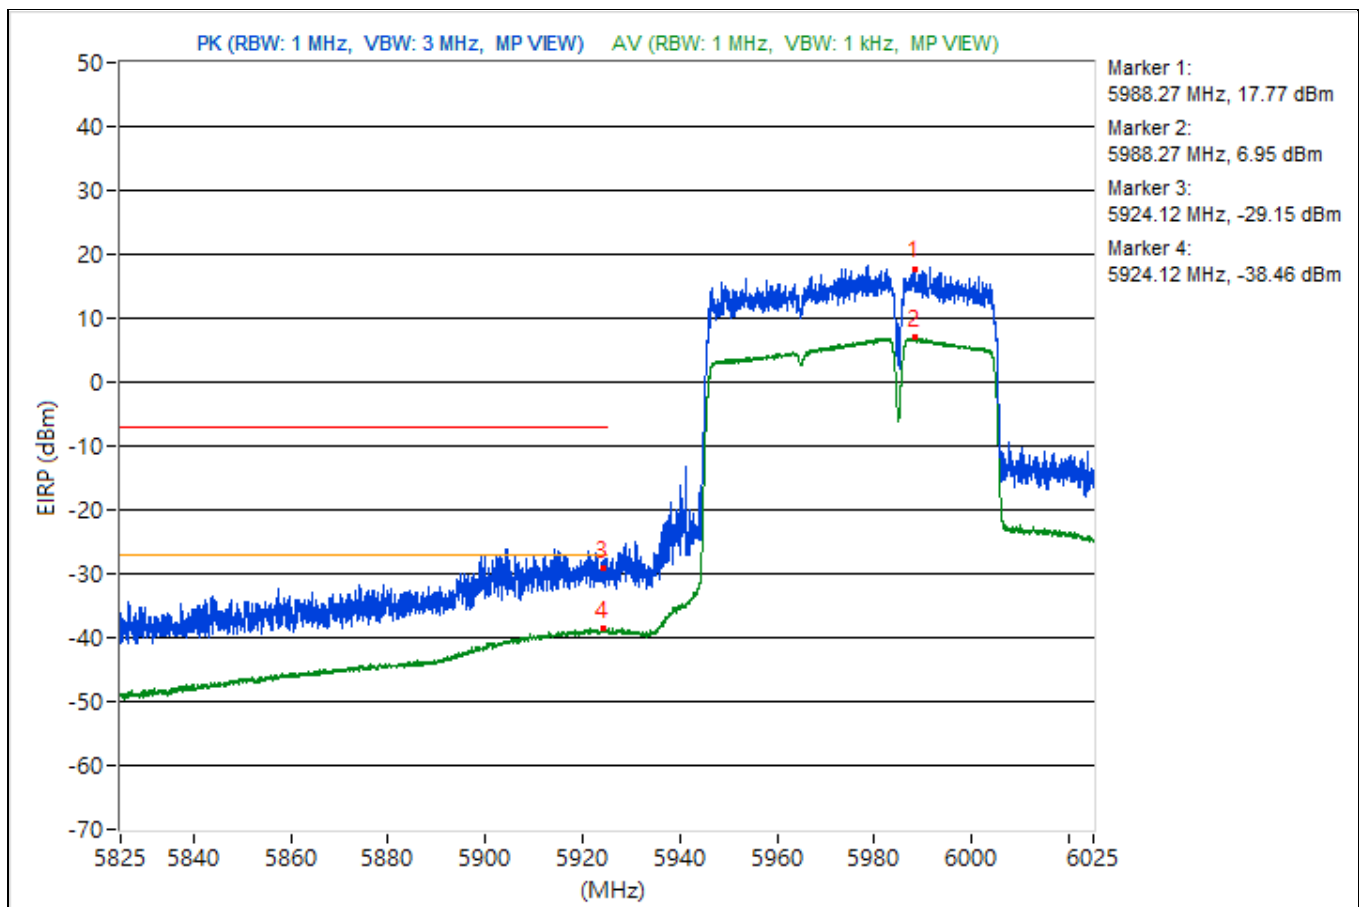


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6027.45	107.42 PK			7.4	4.76	12.16
2	*6027.45	98.98 AV			-1.04	4.76	3.72
3	#5918.4	66.46 PK	88.26	-21.8	-33.56	4.76	-28.8
4	#5918.4	58.73 AV	68.26	-9.53	-41.29	4.76	-36.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

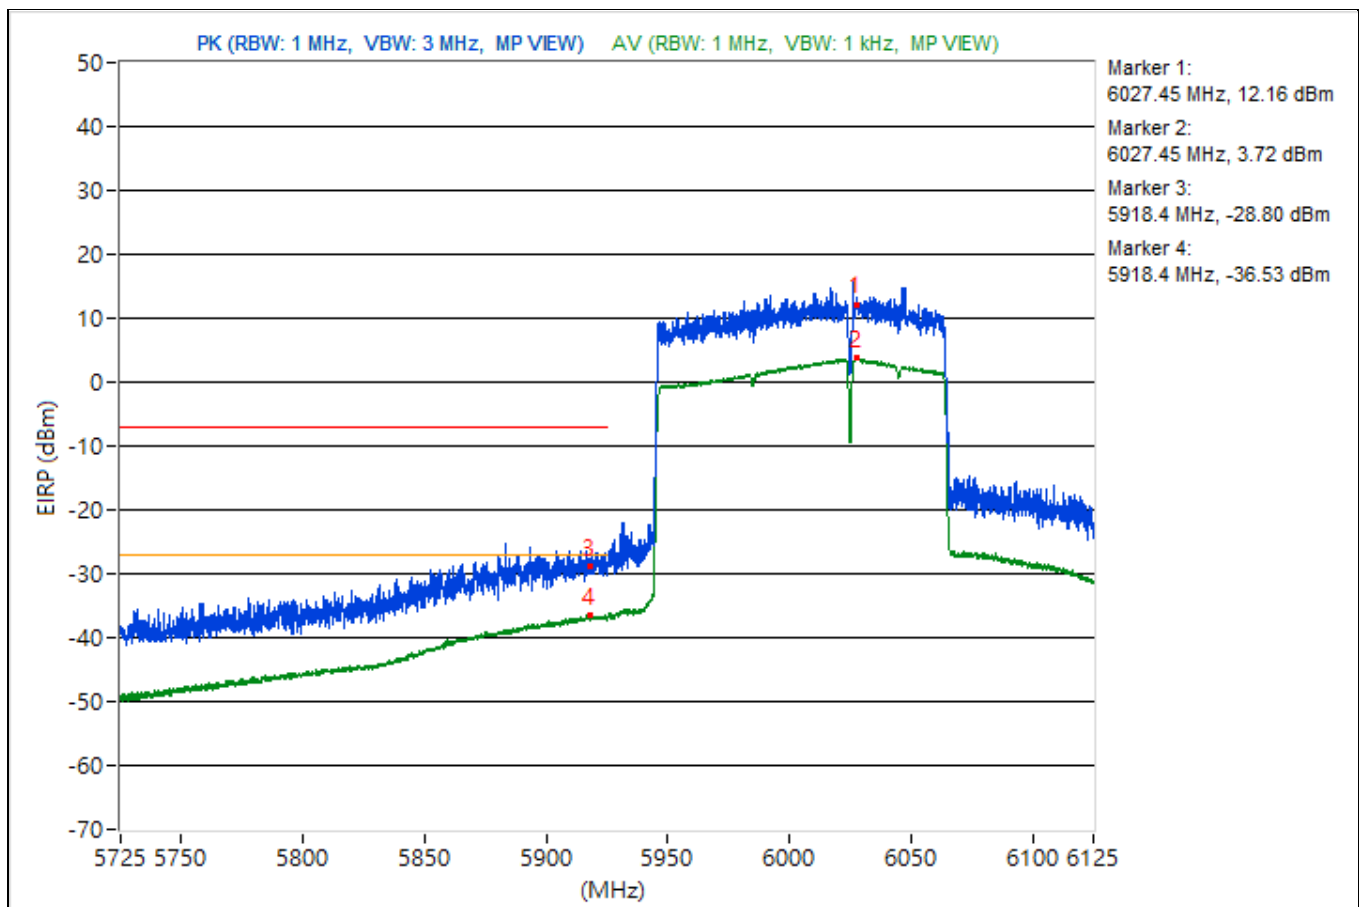


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6023.1	106.97 PK			6.95	4.76	11.71
2	*6023.1	99.02 AV			-1	4.76	3.76
3	#5924.65	69.09 PK	88.26	-19.17	-30.93	4.76	-26.17
4	#5924.65	61.51 AV	68.26	-6.75	-38.51	4.76	-33.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

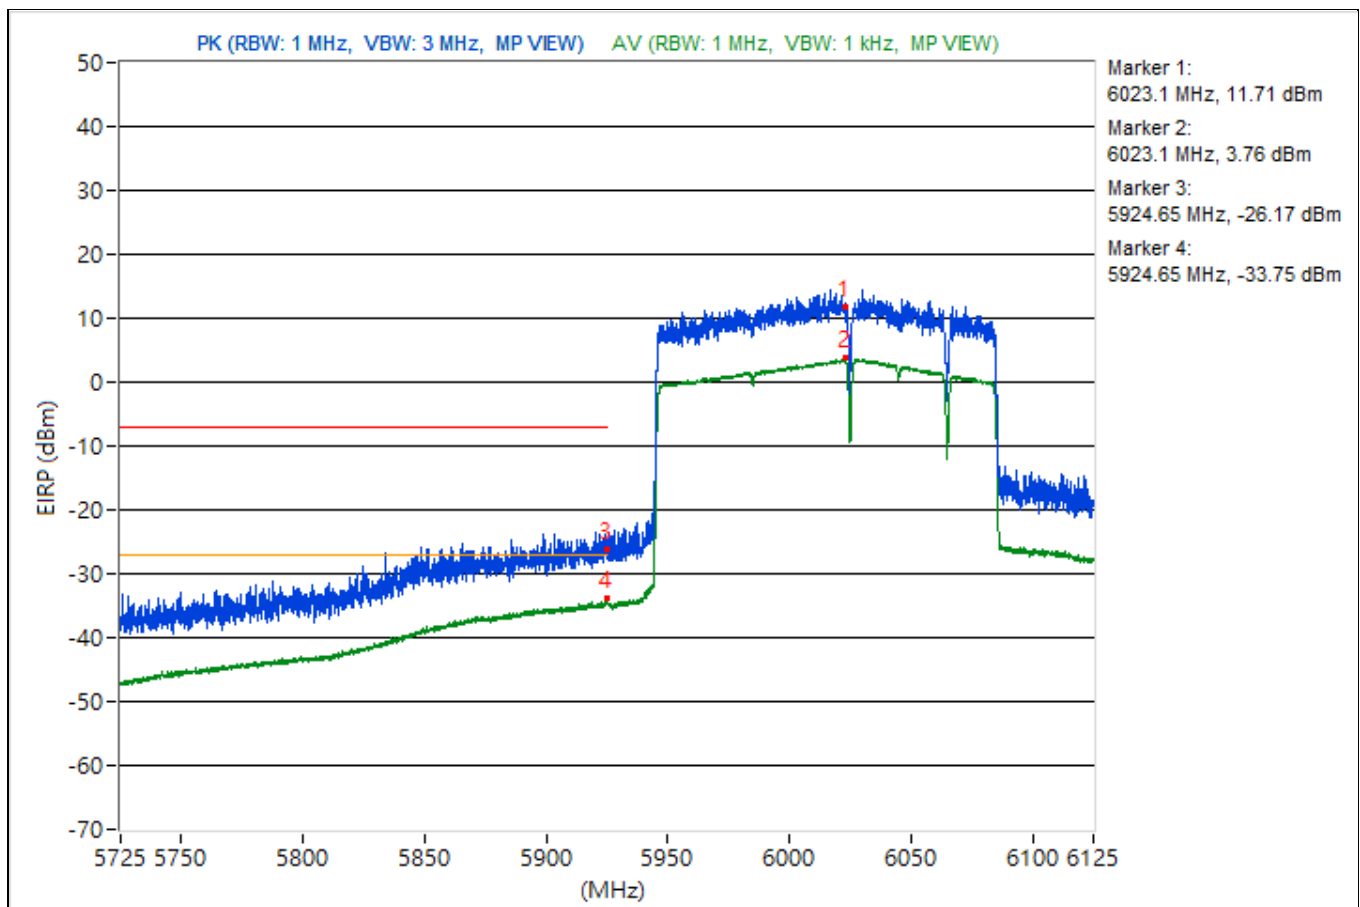

under control of a Standard Power AP


2Tx


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3876.92	53.46 PK	74	-20.54	-51.65	-54.19	7.93	-41.8
2	3876.92	39.88 AV	54	-14.12	-64.73	-68.87	7.93	-55.38
3	14480.44	49.25 PK	74	-24.75	-56.41	-57.57	7.93	-46.01
4	14480.44	39.48 AV	54	-14.52	-68.08	-65.69	7.93	-55.78
5	19178.3	50.17 PK	74	-23.83	-56.04	-56.02	7.93	-45.09
6	19178.3	41.27 AV	54	-12.73	-63.7	-66.65	7.93	-53.99
7	22411.3	53.81 PK	74	-20.19	-52.04	-52.76	7.93	-41.45
8	22411.3	41.79 AV	54	-12.21	-66.8	-62.88	7.93	-53.47
9	38634.58	48.01 PK	74	-25.99	-57.66	-58.78	7.93	-47.25
10	38634.58	36.74 AV	54	-17.26	-70.91	-68.37	7.93	-58.52

Note: Margin value = Emission Level - Limit value

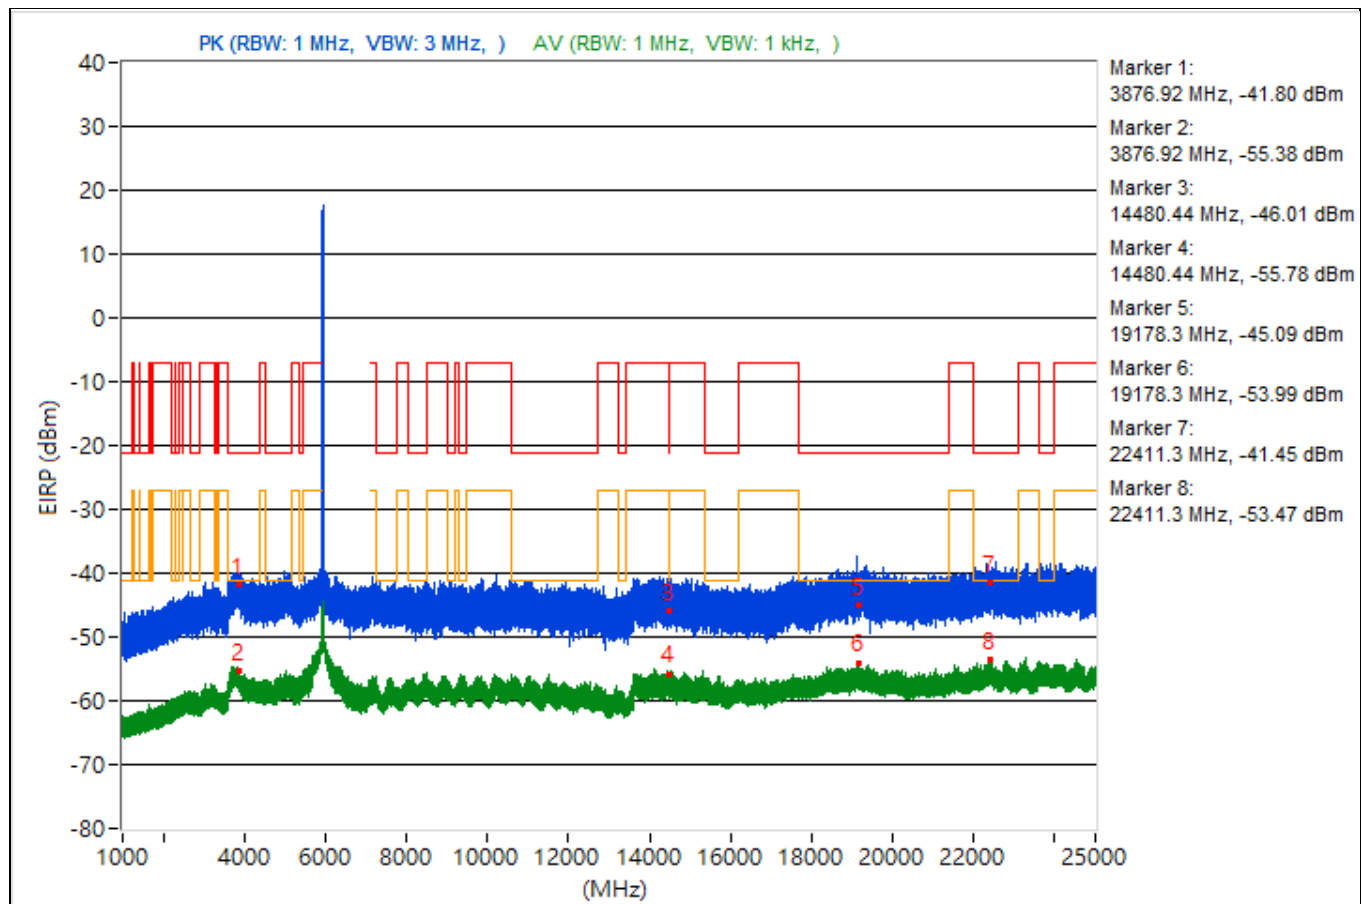


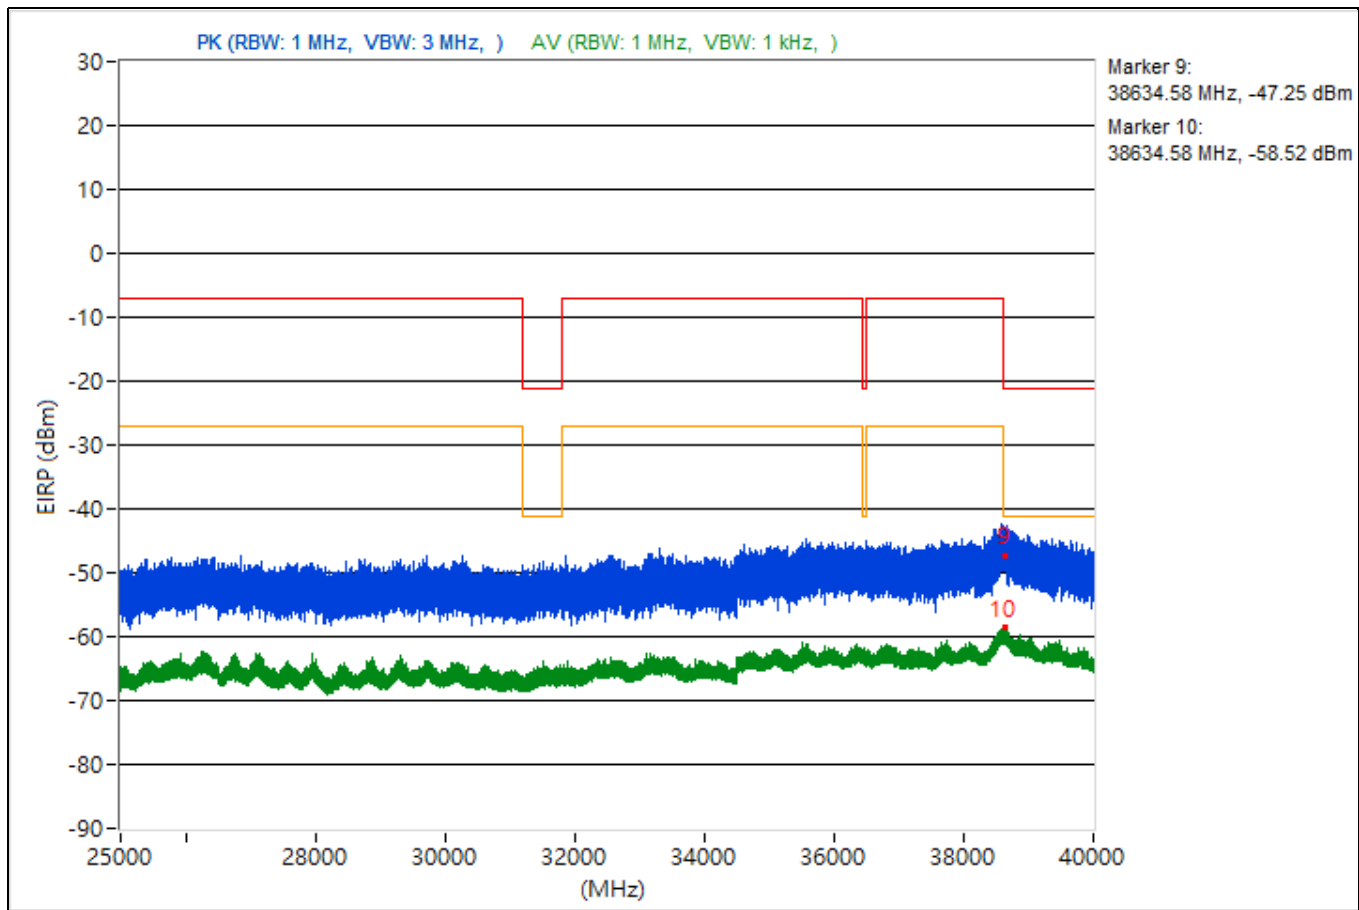


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.3	54.78 PK	74	-19.22	-50.96	-51.93	7.93	-40.48
2	3813.3	41.97 AV	54	-12.03	-63.01	-65.92	7.93	-53.29
3	14473.87	53.61 PK	74	-20.39	-50.58	-56.43	7.93	-41.65
4	14473.87	41.16 AV	54	-12.84	-63.82	-66.73	7.93	-54.1
5	19092.3	51.71 PK	74	-22.29	-54.41	-54.58	7.93	-43.55
6	19092.3	41.93 AV	54	-12.07	-65.54	-63.29	7.93	-53.33
7	22606.5	52.38 PK	74	-21.62	-56.16	-52.31	7.93	-42.88
8	22606.5	42.74 AV	54	-11.26	-66.62	-61.65	7.93	-52.52
9	38620.44	49.97 PK	74	-24.03	-56.67	-55.82	7.93	-45.29
10	38620.44	39.32 AV	54	-14.68	-65.5	-68.93	7.93	-55.94

Note: Margin value = Emission Level - Limit value

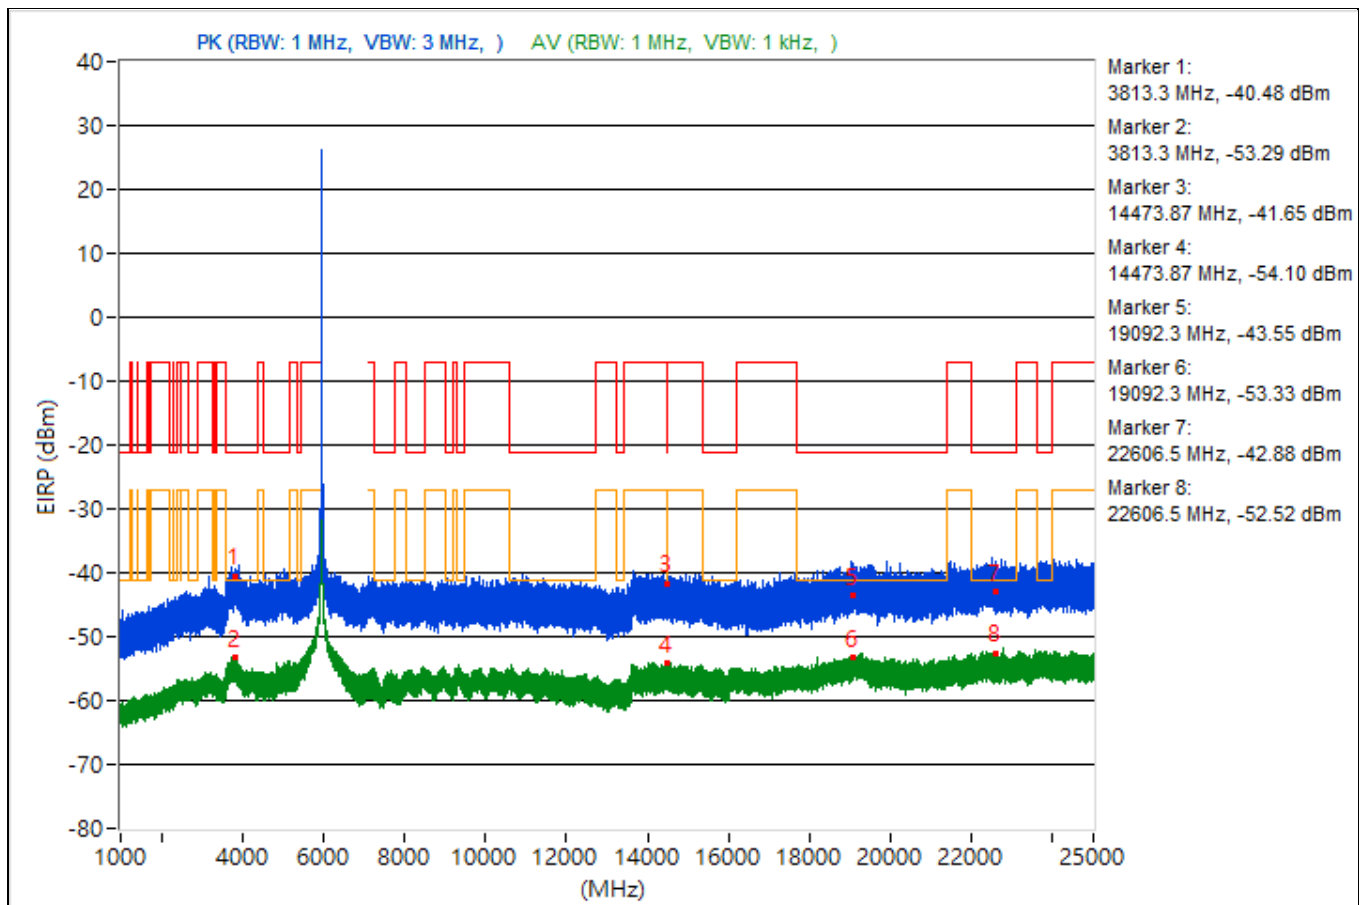


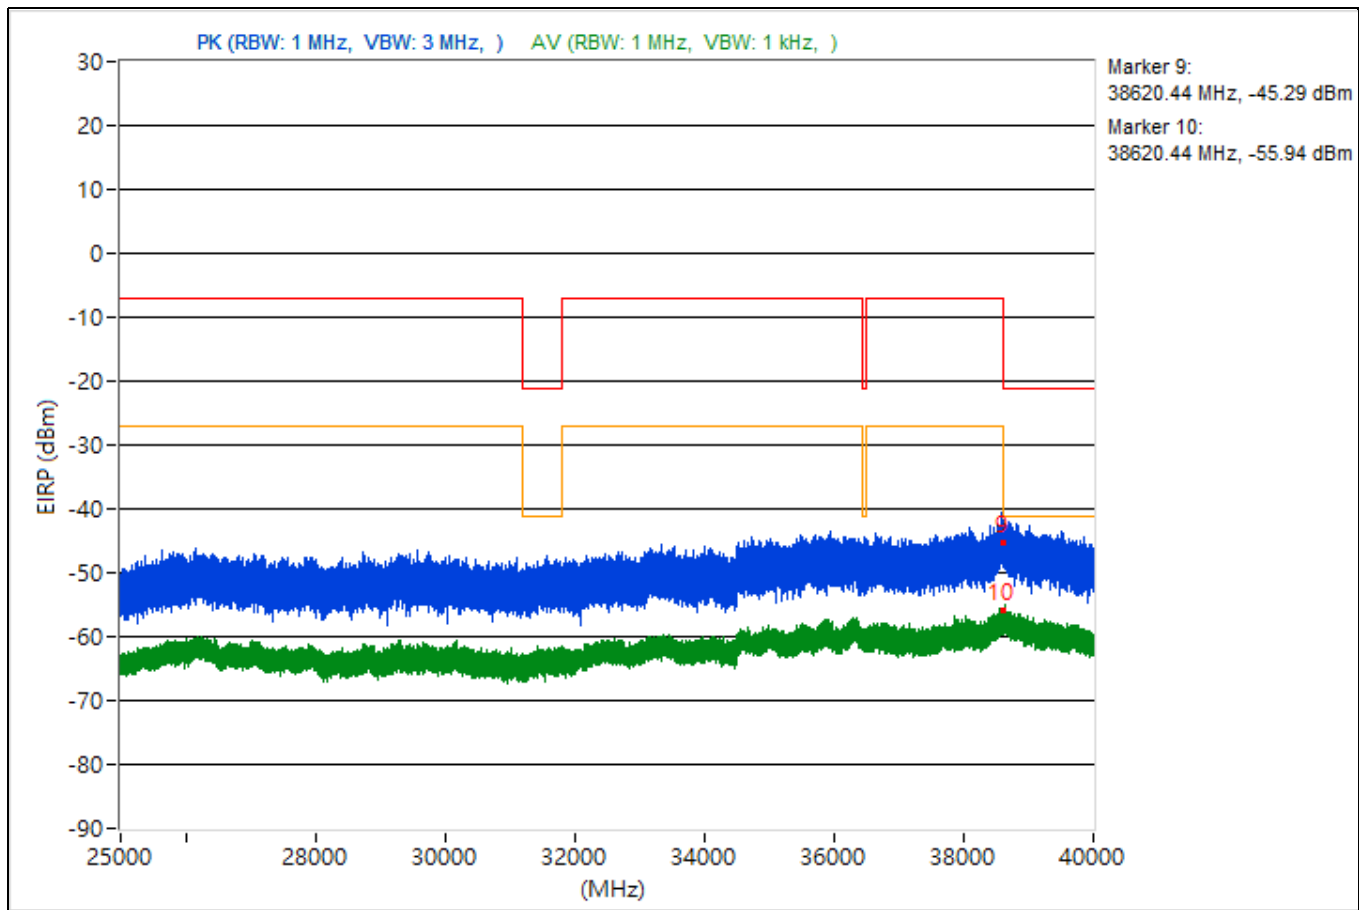


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.6	54.99 PK	74	-19.01	-53.1	-49.89	7.93	-40.27
2	3798.6	40.61 AV	54	-13.39	-64.63	-66.84	7.93	-54.65
3	15464.09	47.85 PK	74	-26.15	-59.53	-57.42	7.93	-47.41
4	15464.09	39.24 AV	54	-14.76	-69.69	-65.29	7.93	-56.02
5	19346.8	49.88 PK	74	-24.12	-56.22	-56.43	7.93	-45.38
6	19346.8	40.54 AV	54	-13.46	-67.11	-64.57	7.93	-54.72
7	23662.1	53.11 PK	74	-20.89	-55.66	-51.49	7.93	-42.15
8	23662.1	41.65 AV	54	-12.35	-67.27	-62.89	7.93	-53.61
9	38631.64	49.2 PK	74	-24.8	-59.36	-55.49	7.93	-46.06
10	38631.64	36.41 AV	54	-17.59	-71.75	-68.45	7.93	-58.85

Note: Margin value = Emission Level - Limit value

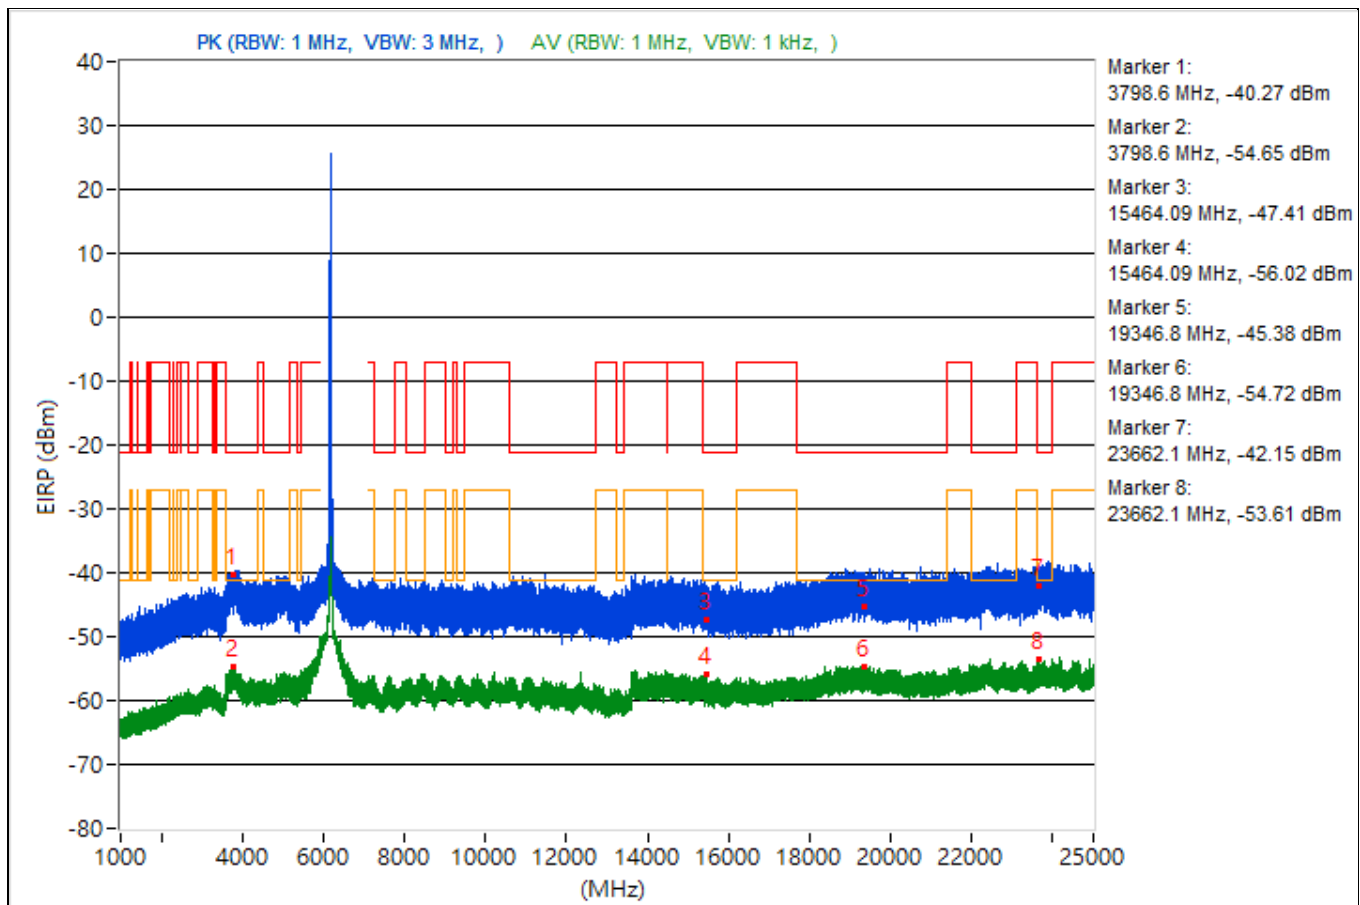


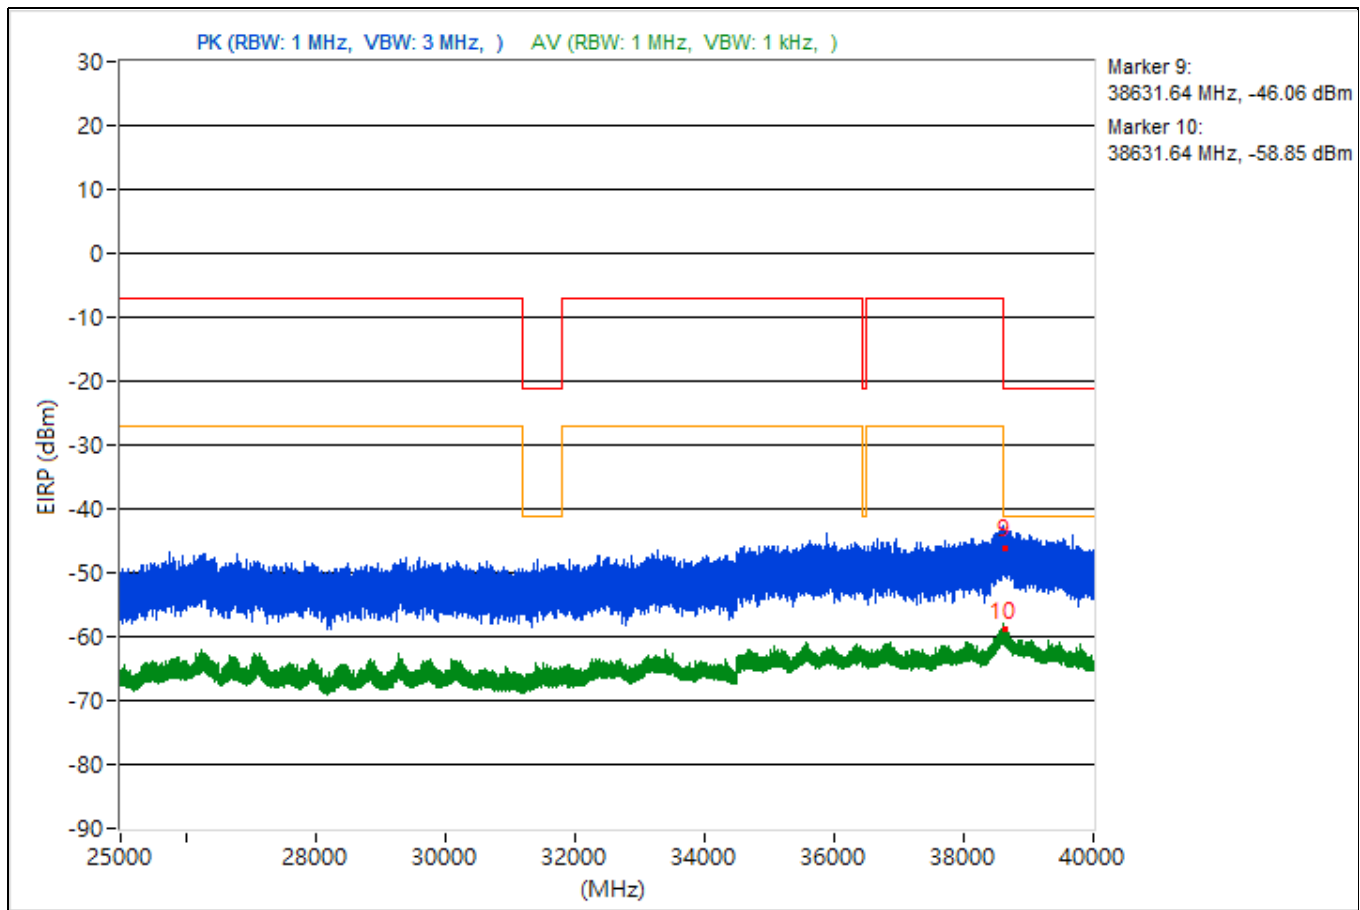


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.73	54 PK	74	-20	-51.41	-53.16	7.93	-41.26
2	3796.73	40.14 AV	54	-13.86	-64.71	-68.02	7.93	-55.12
3	14492.53	52.49 PK	74	-21.51	-54.36	-53.14	7.93	-42.77
4	14492.53	40.09 AV	54	-13.91	-65.06	-67.48	7.93	-55.17
5	18945.6	52.48 PK	74	-21.52	-55.67	-52.38	7.93	-42.78
6	18945.6	40.45 AV	54	-13.55	-67.82	-64.35	7.93	-54.81
7	22366.6	52.42 PK	74	-21.58	-53.47	-54.12	7.93	-42.84
8	22366.6	41.48 AV	54	-12.52	-63.34	-66.76	7.93	-53.78
9	38630.13	48.14 PK	74	-25.86	-57.48	-58.72	7.93	-47.12
10	38630.13	36.67 AV	54	-17.33	-68.56	-70.78	7.93	-58.59

Note: Margin value = Emission Level - Limit value

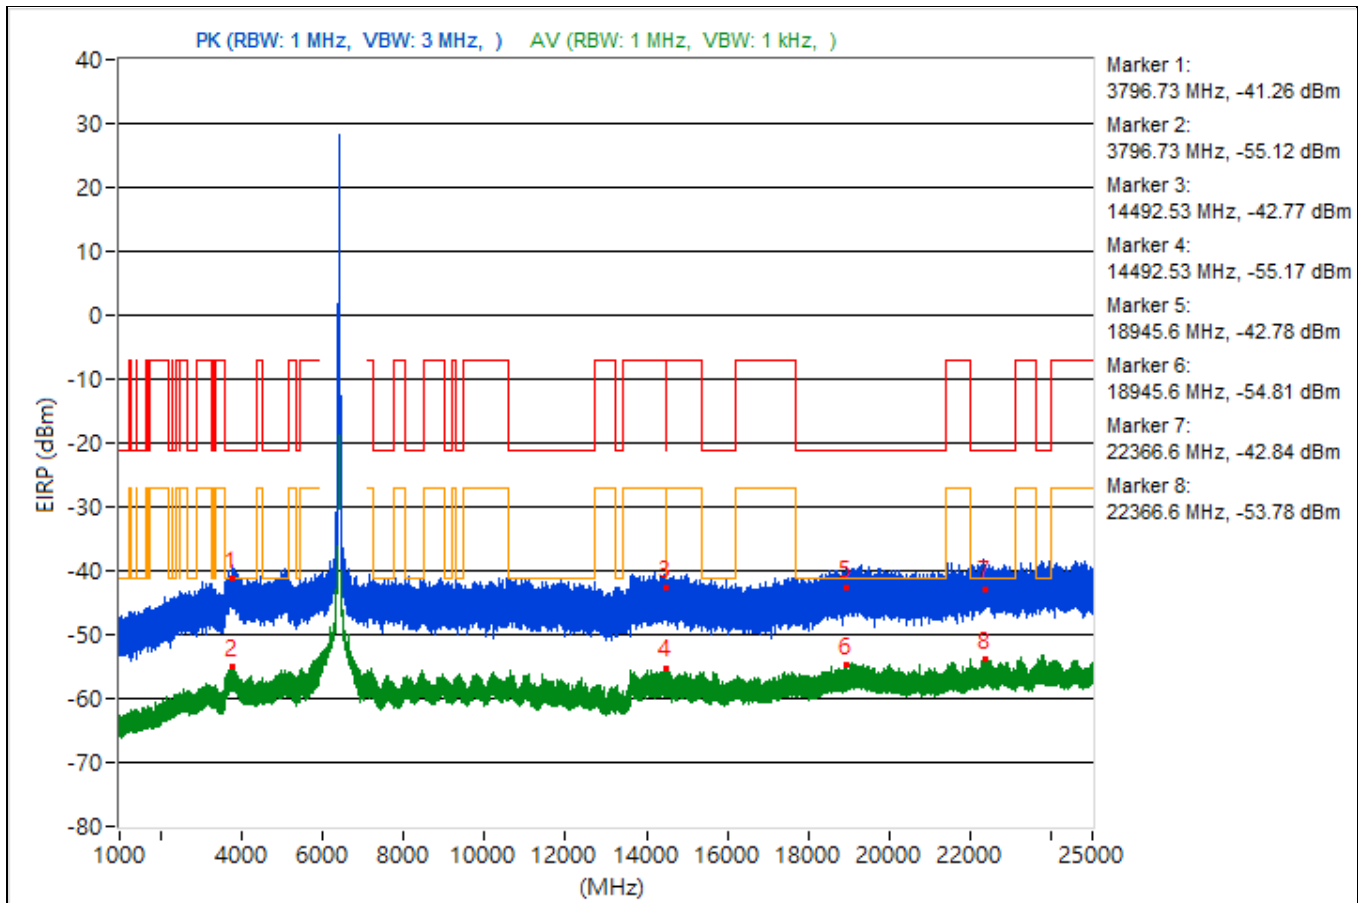


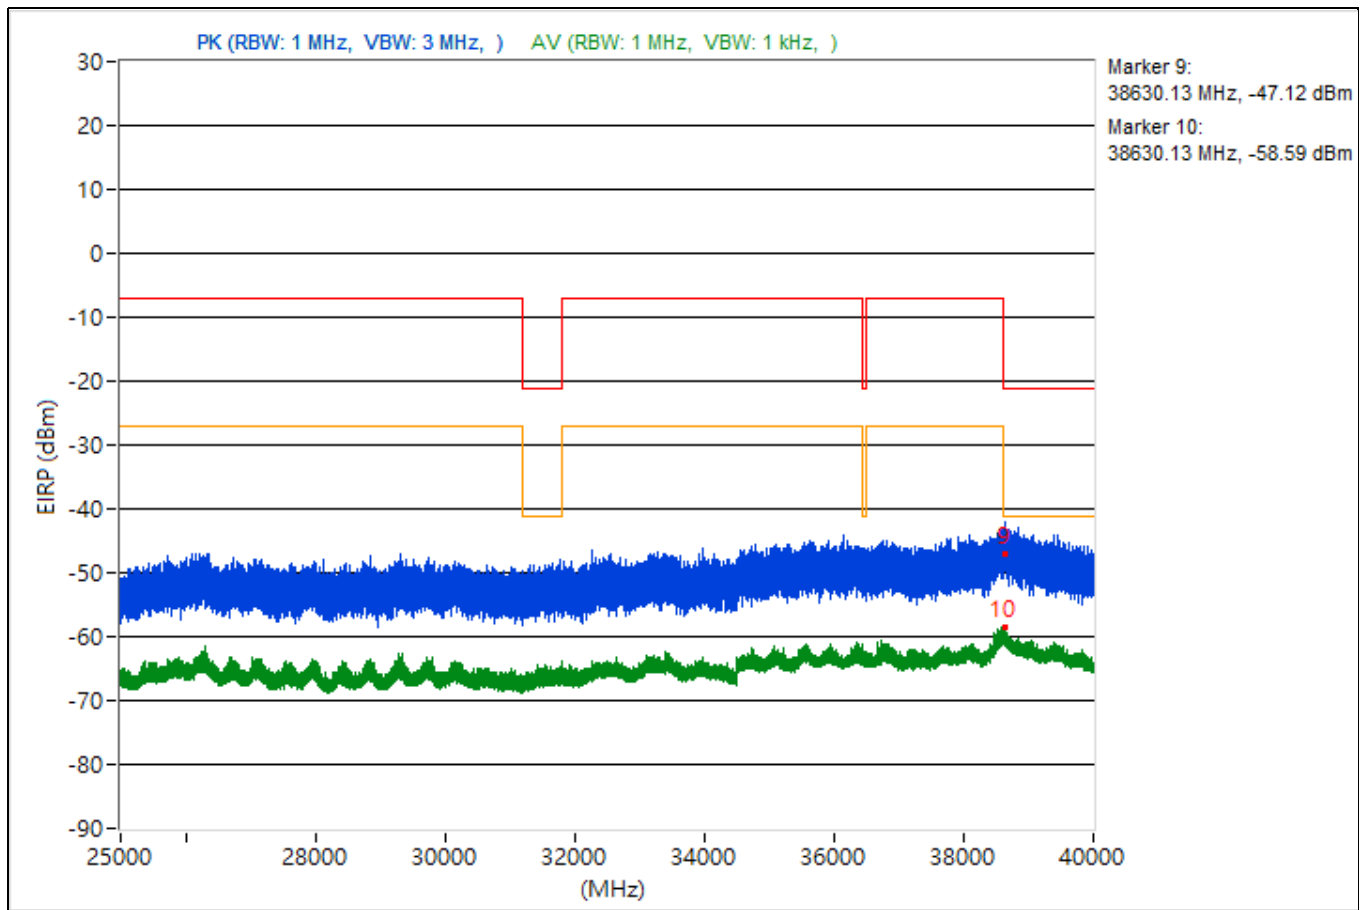


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3746.33	54.57 PK	74	-19.43	-52.54	-50.87	7.93	-40.69
2	3746.33	40.02 AV	54	-13.98	-68.56	-64.66	7.93	-55.24
3	14471.73	51.69 PK	74	-22.31	-53.35	-56.09	7.93	-43.57
4	14471.73	39.24 AV	54	-14.76	-68.97	-65.6	7.93	-56.02
5	19031.9	51.63 PK	74	-22.37	-54.84	-54.31	7.93	-43.63
6	19031.9	41 AV	54	-13	-66.46	-64.22	7.93	-54.26
7	22367.8	53.27 PK	74	-20.73	-54.98	-51.55	7.93	-41.99
8	22367.8	41.6 AV	54	-12.4	-63.84	-65.51	7.93	-53.66
9	38600.89	47.67 PK	74	-26.33	-59.9	-57.49	7.93	-47.59
10	38600.89	37.32 AV	54	-16.68	-70.61	-67.64	7.93	-57.94

Note: Margin value = Emission Level - Limit value

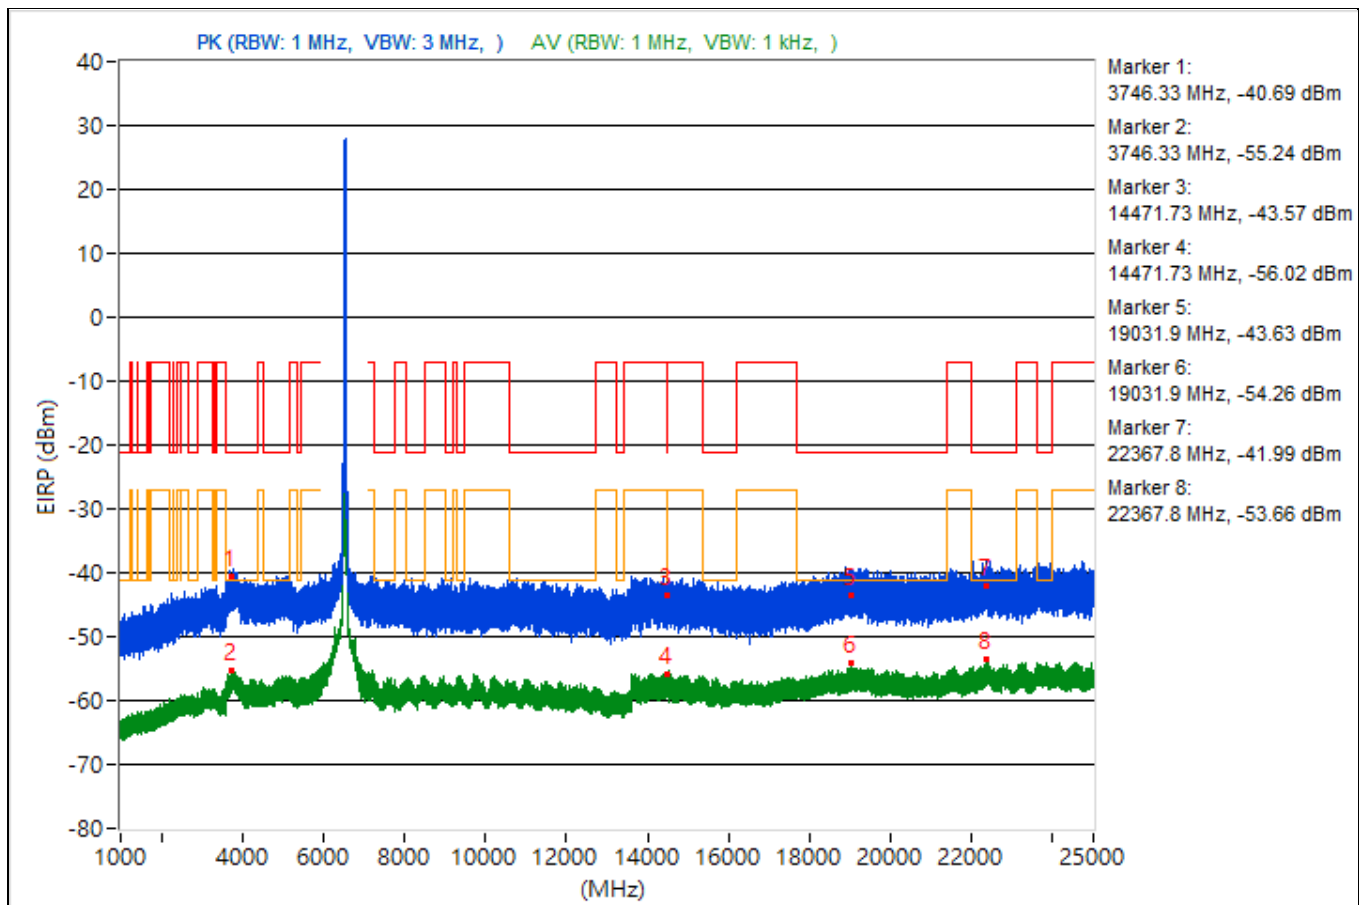


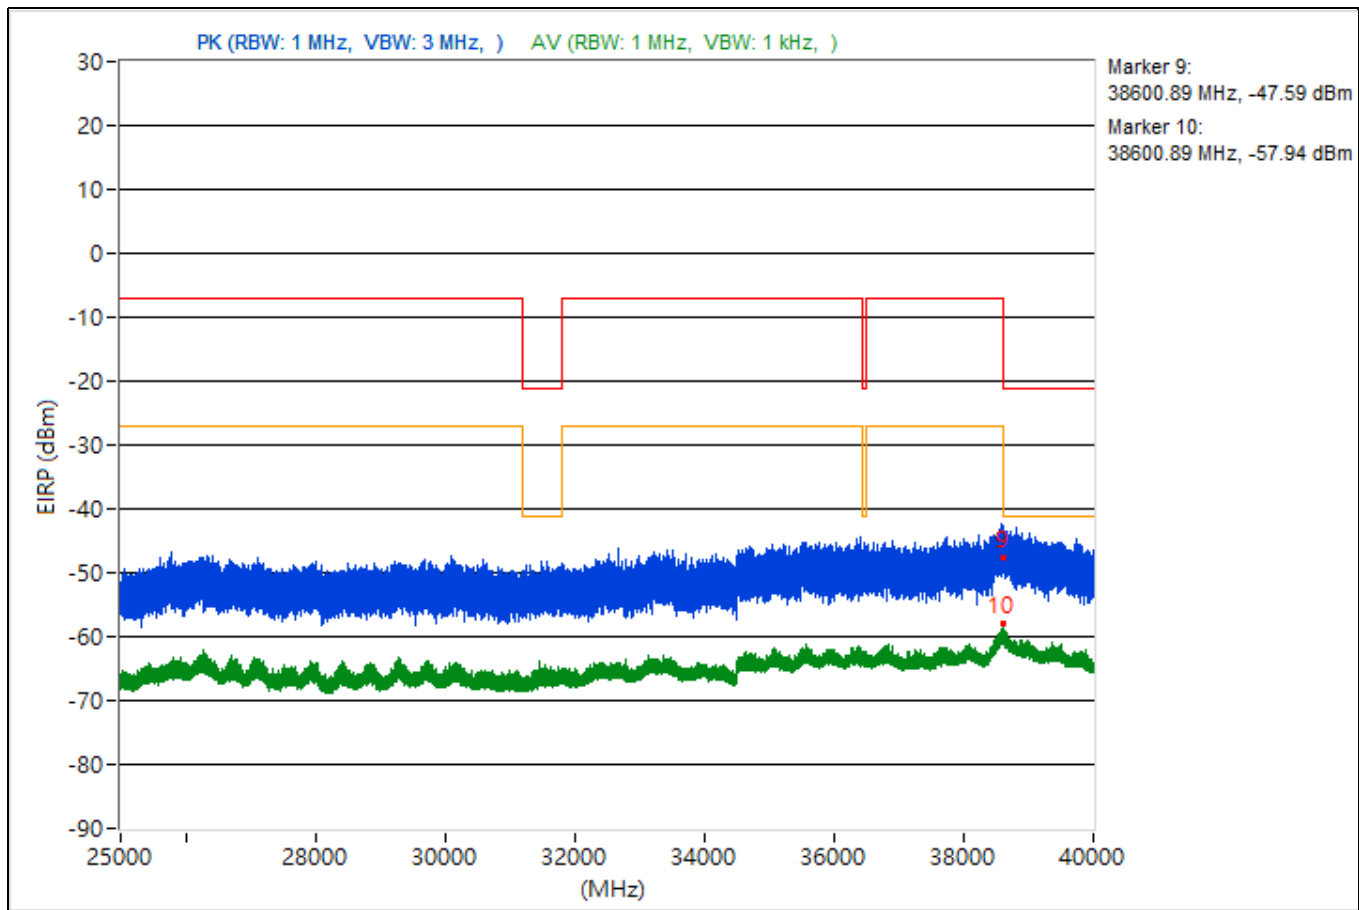


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.76	54.38 PK	74	-19.62	-52.24	-51.45	7.93	-40.88
2	3777.76	40.09 AV	54	-13.91	-67.67	-64.96	7.93	-55.17
3	7314.78	50.11 PK	74	-23.89	-55.53	-56.73	7.93	-45.15
4	7314.78	39.14 AV	54	-14.86	-68.95	-65.74	7.93	-56.12
5	21359.4	52.51 PK	74	-21.49	-52.86	-54.73	7.93	-42.75
6	21359.4	40.04 AV	54	-13.96	-64.88	-67.99	7.93	-55.22
7	23672.2	54.49 PK	74	-19.51	-52.55	-51.01	7.93	-40.77
8	23672.2	41.2 AV	54	-12.8	-66.89	-63.69	7.93	-54.06
9	38602.49	48.55 PK	74	-25.45	-56.98	-58.44	7.93	-46.71
10	38602.49	36.98 AV	54	-17.02	-67.94	-71.06	7.93	-58.28

Note: Margin value = Emission Level - Limit value

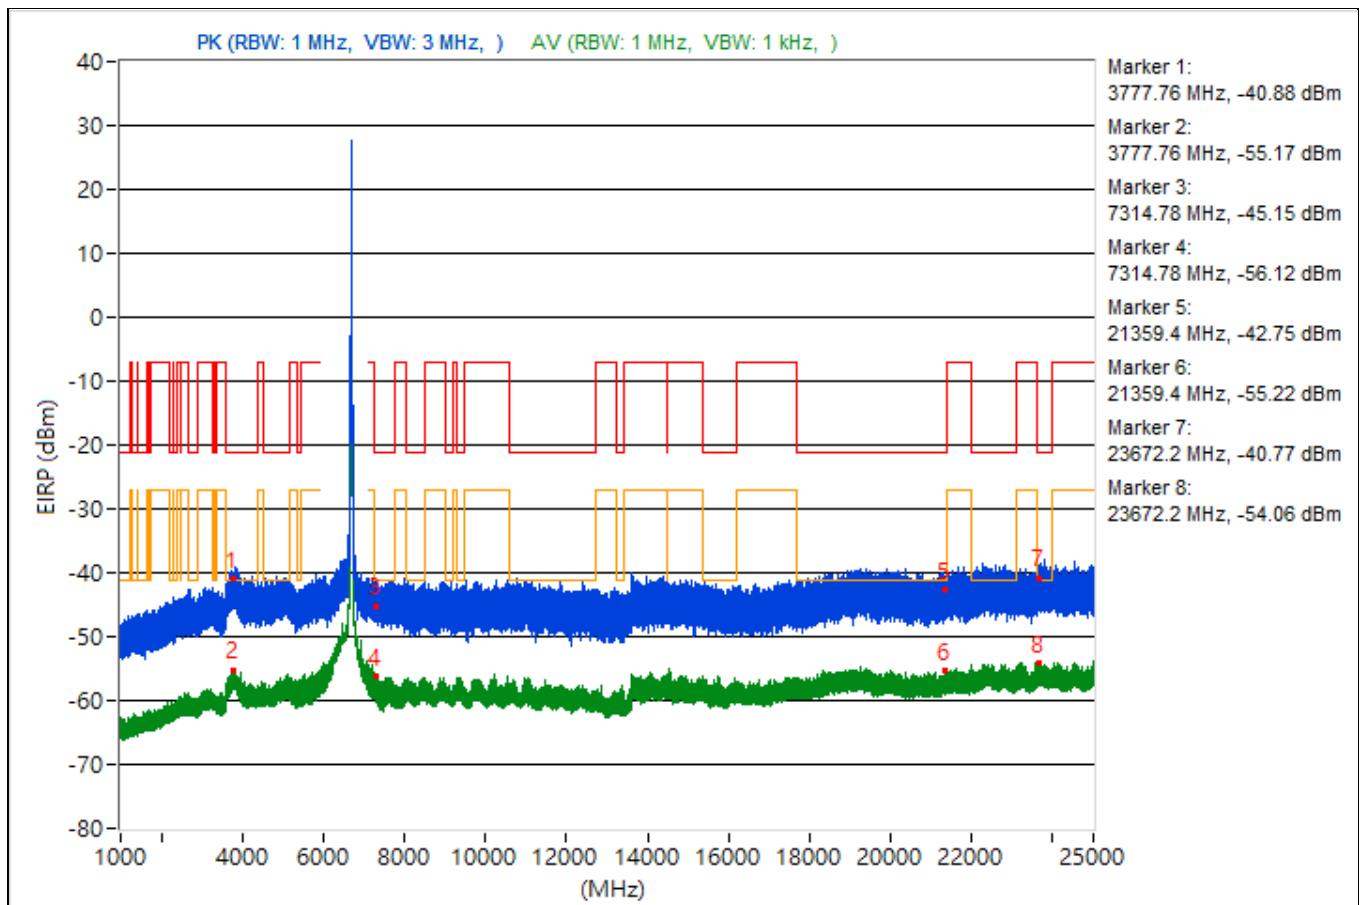


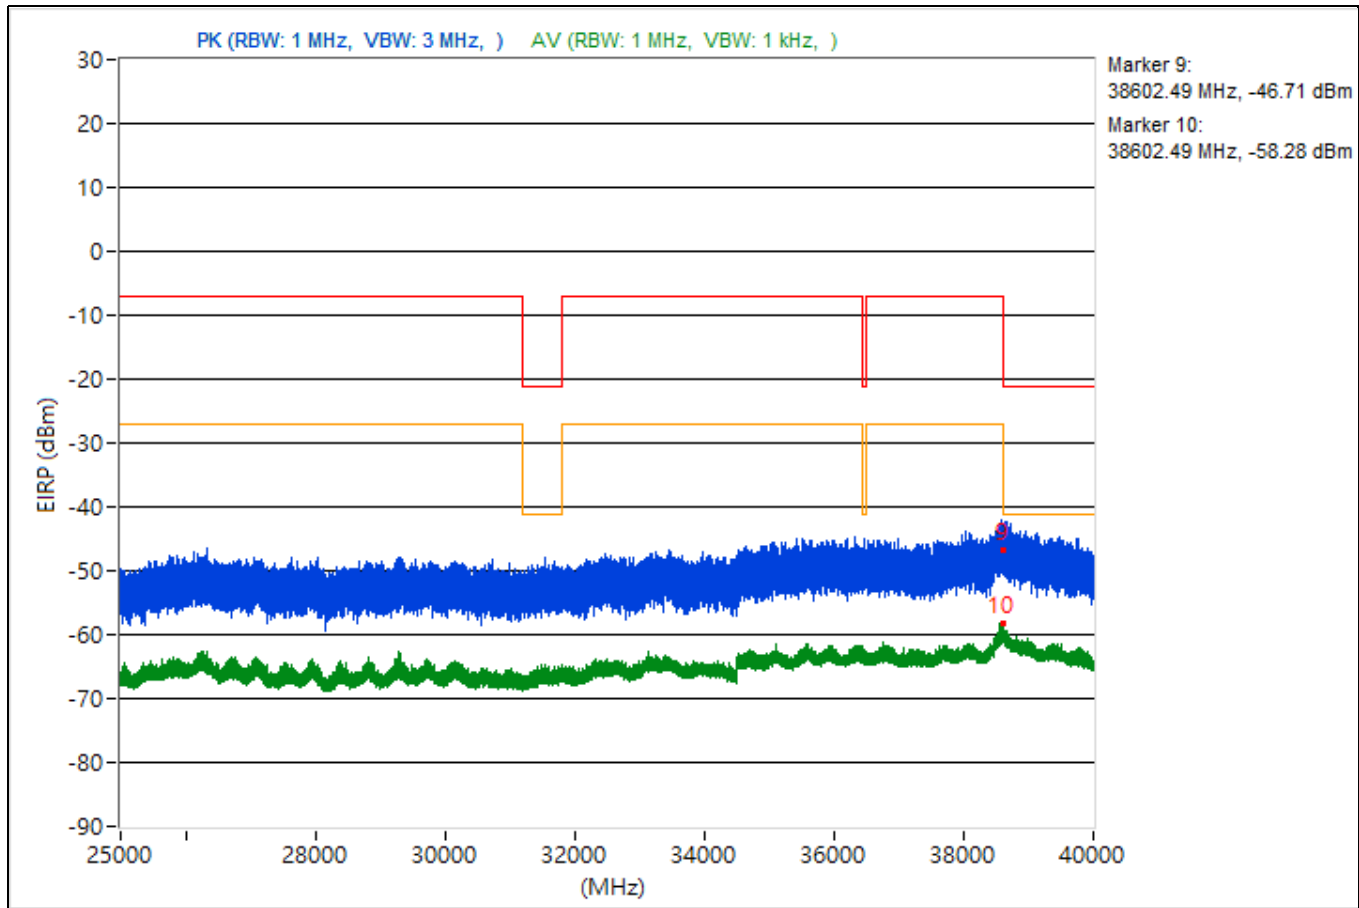


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.86	53.54 PK	74	-20.46	-53.61	-51.88	7.93	-41.72
2	3786.86	42.2 AV	54	-11.8	-65.22	-63.06	7.93	-53.06
3	7255.36	51.88 PK	74	-22.12	-55.21	-53.58	7.93	-43.38
4	7255.36	41.29 AV	54	-12.71	-65.7	-64.24	7.93	-53.97
5	19358.6	51.37 PK	74	-22.63	-54.03	-55.81	7.93	-43.89
6	19358.6	41.94 AV	54	-12.06	-66.01	-63.01	7.93	-53.32
7	23678.9	52.72 PK	74	-21.28	-52.83	-54.24	7.93	-42.54
8	23678.9	43.34 AV	54	-10.66	-63.82	-62.08	7.93	-51.92
9	38609.33	49.05 PK	74	-24.95	-59.35	-55.7	7.93	-46.21
10	38609.33	39.95 AV	54	-14.05	-65.51	-67.13	7.93	-55.31

Note: Margin value = Emission Level - Limit value

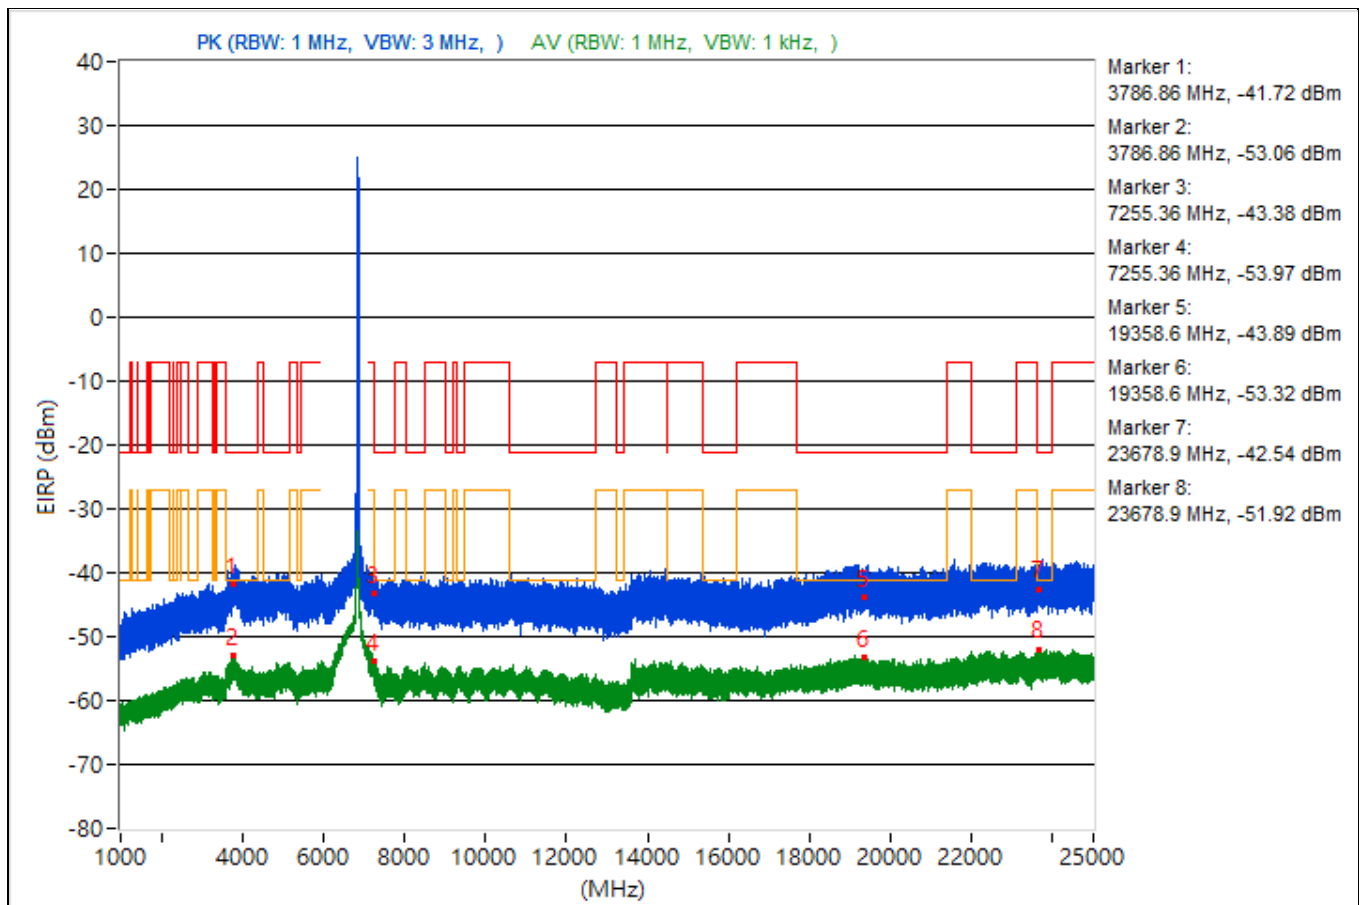


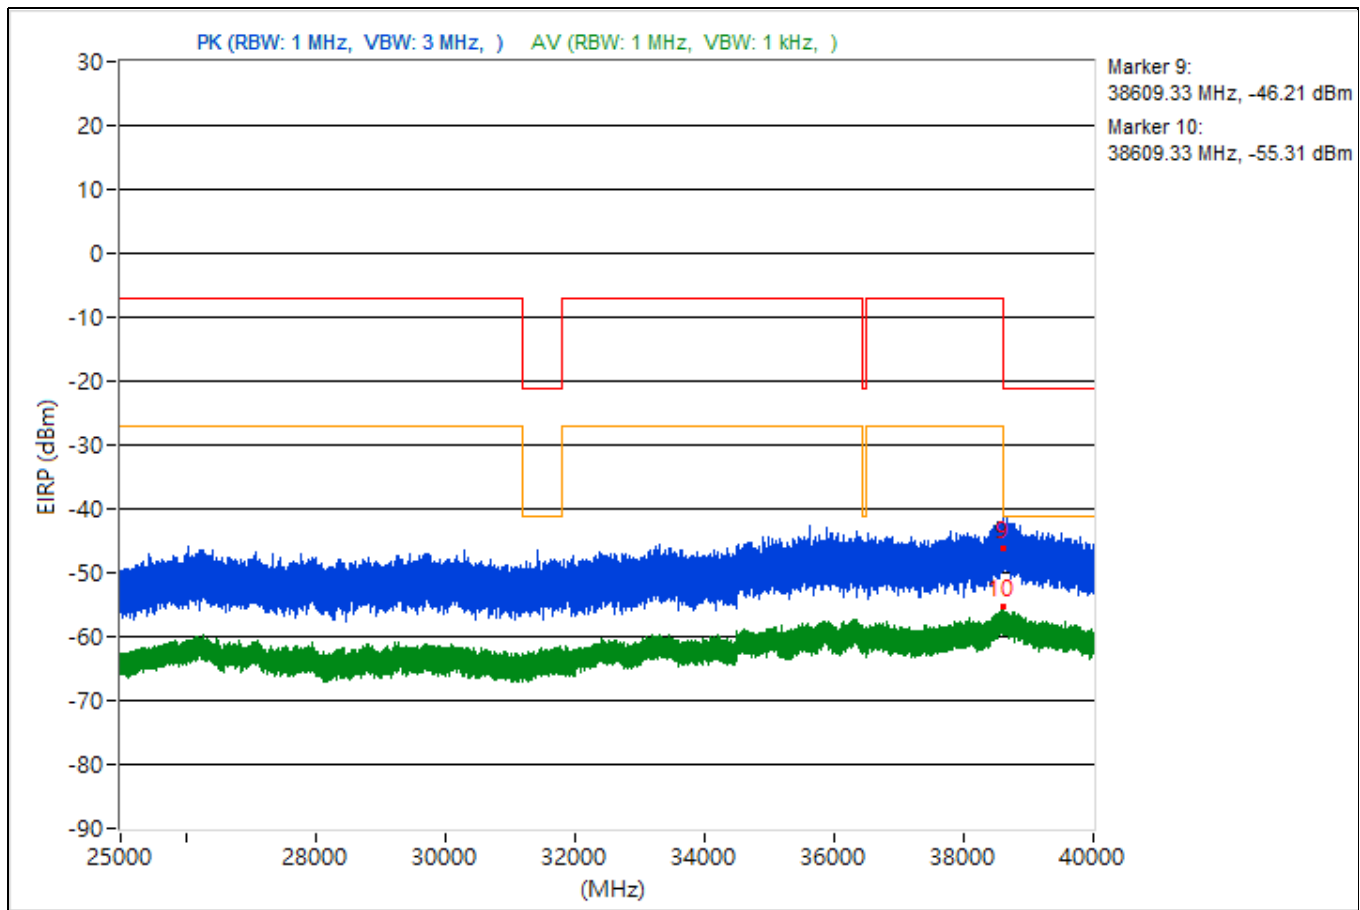


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.43	49.09 PK	74	-24.91	-54.34	-53.88	4.92	-46.17
2	3797.43	38.05 AV	54	-15.95	-65.3	-64.99	4.92	-57.21
3	8485.6	45.83 PK	74	-28.17	-58.28	-56.6	4.92	-49.43
4	8485.6	36.34 AV	54	-17.66	-65.61	-68.58	4.92	-58.92
5	19223.8	46.75 PK	74	-27.25	-55.7	-57.34	4.92	-48.51
6	19223.8	38.09 AV	54	-15.91	-67.02	-63.77	4.92	-57.17
7	23678.6	51.68 PK	74	-22.32	-50.98	-52.12	4.92	-43.58
8	23678.6	38.56 AV	54	-15.44	-63.75	-65.75	4.92	-56.7
9	38604.71	48.32 PK	74	-25.68	-58.71	-52.87	4.92	-46.94
10	38604.71	33.76 AV	54	-20.24	-71.27	-68.14	4.92	-61.5

Note: Margin value = Emission Level - Limit value

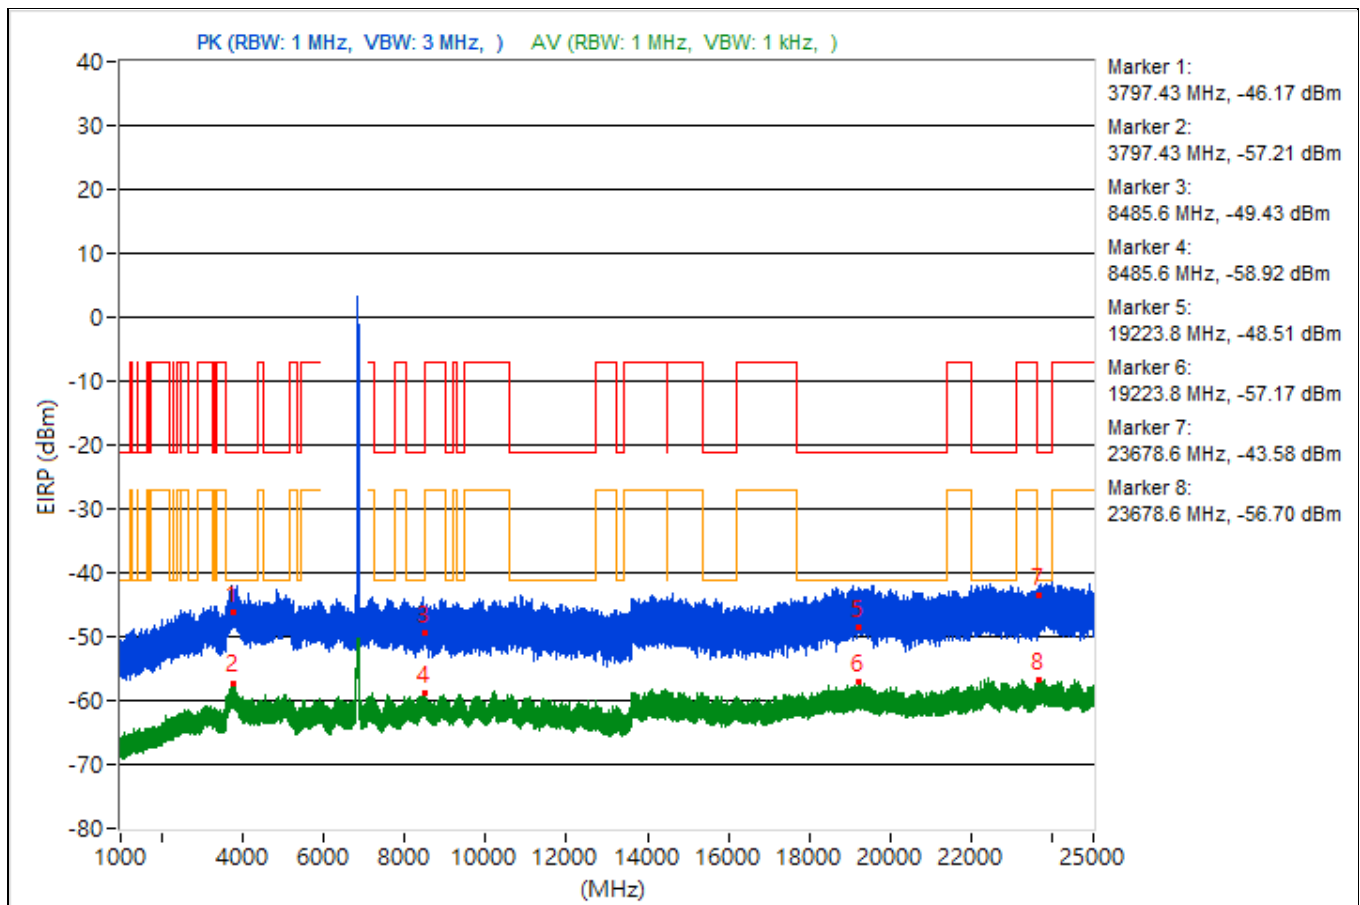


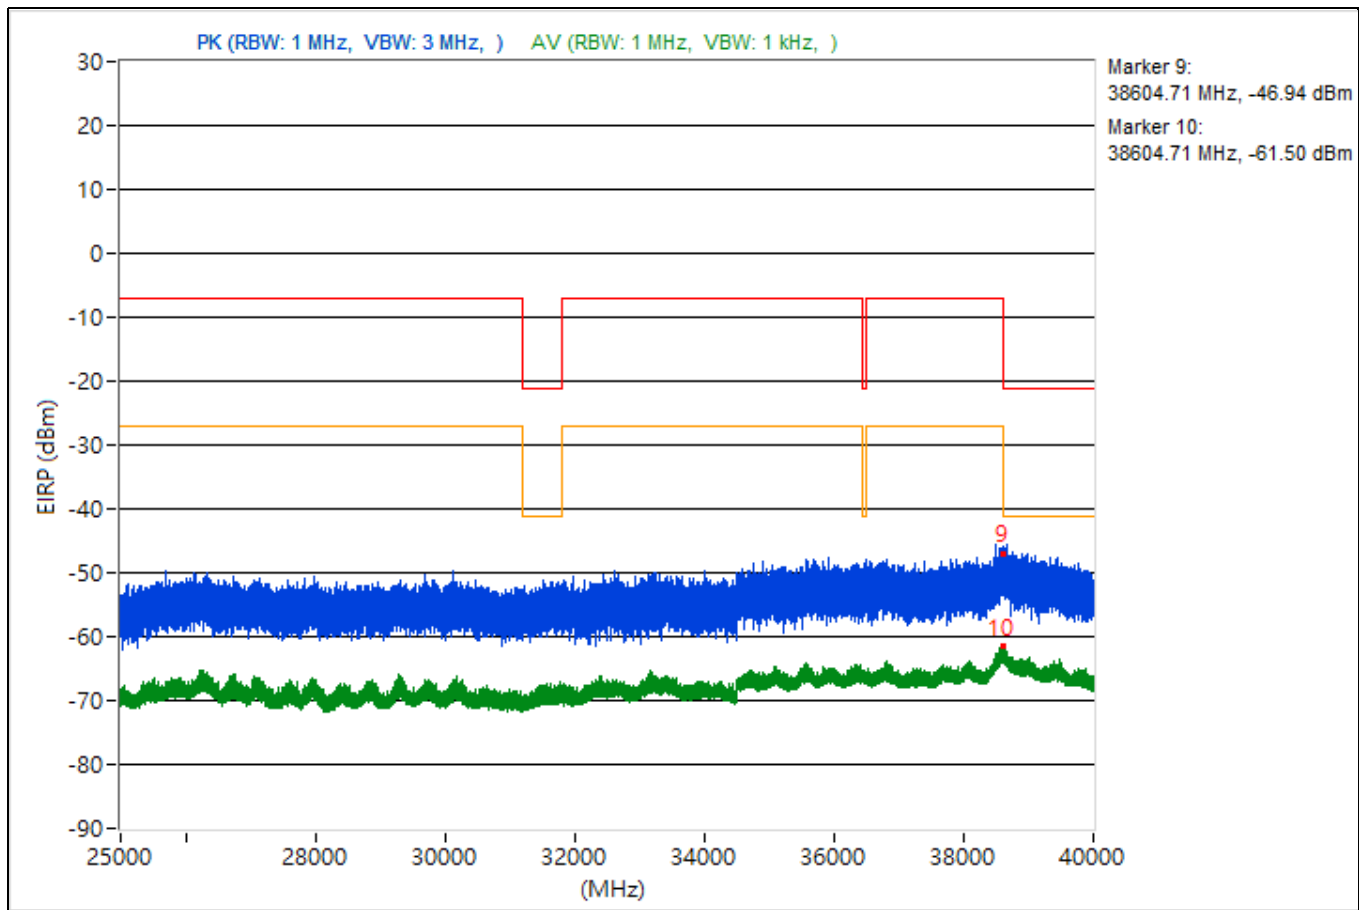


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.72	50.27 PK	74	-23.73	-53.15	-52.7	4.92	-44.99
2	3781.72	37.35 AV	54	-16.65	-64.53	-67.73	4.92	-57.91
3	7252.32	47.5 PK	74	-26.5	-55.65	-55.73	4.92	-47.76
4	7252.32	38.2 AV	54	-15.8	-64.38	-65.71	4.92	-57.06
5	19231.8	48.89 PK	74	-25.11	-55.5	-53.36	4.92	-46.37
6	19231.8	37.67 AV	54	-16.33	-64.17	-67.49	4.92	-57.59
7	22804.8	49.41 PK	74	-24.59	-53	-54.75	4.92	-45.85
8	22804.8	38.39 AV	54	-15.61	-63.35	-67	4.92	-56.87
9	38610.49	45.39 PK	74	-28.61	-56.38	-59.93	4.92	-49.87
10	38610.49	34.09 AV	54	-19.91	-70.51	-68.05	4.92	-61.17

Note: Margin value = Emission Level - Limit value

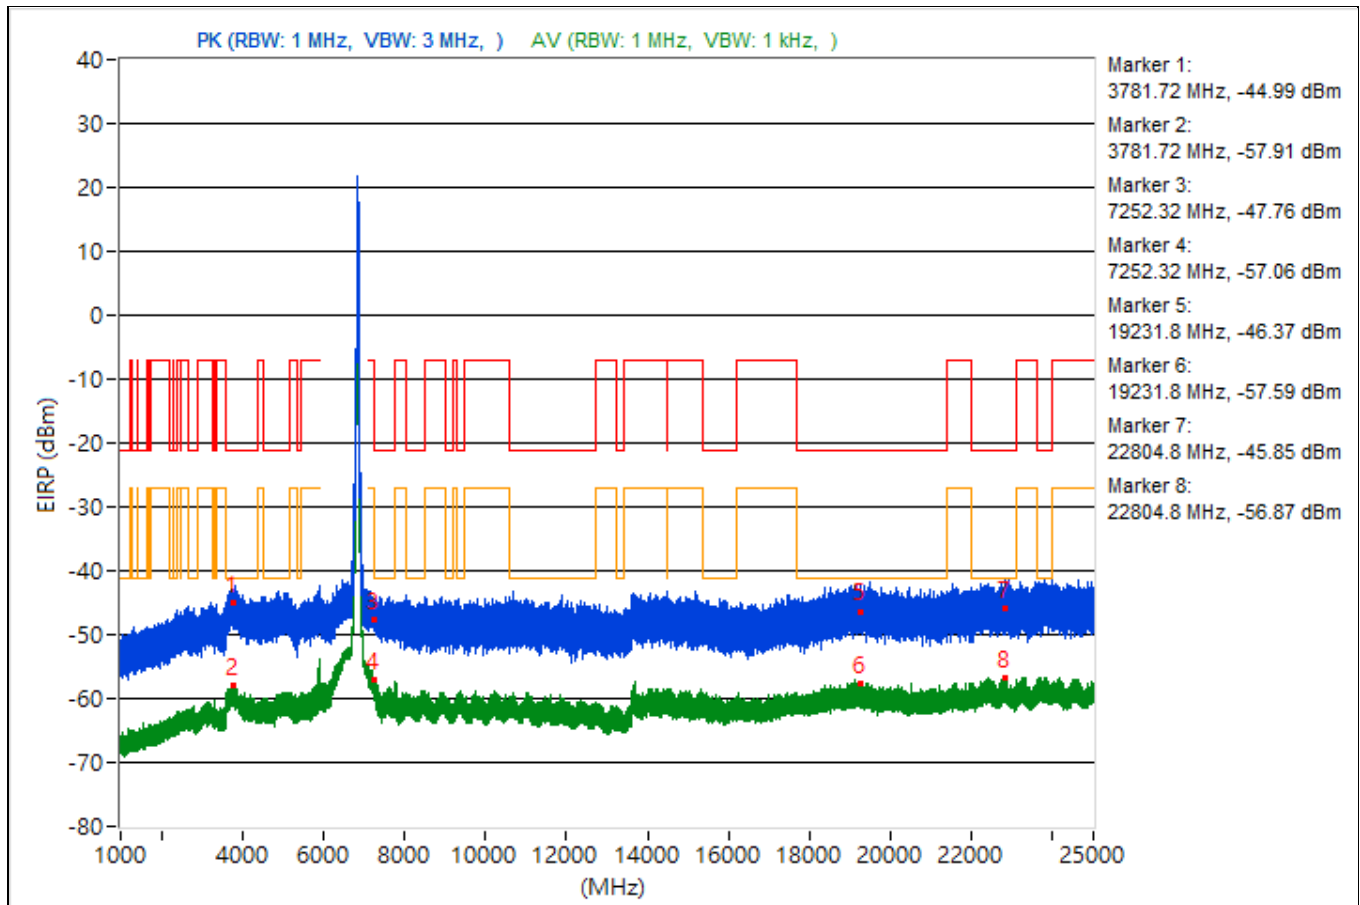


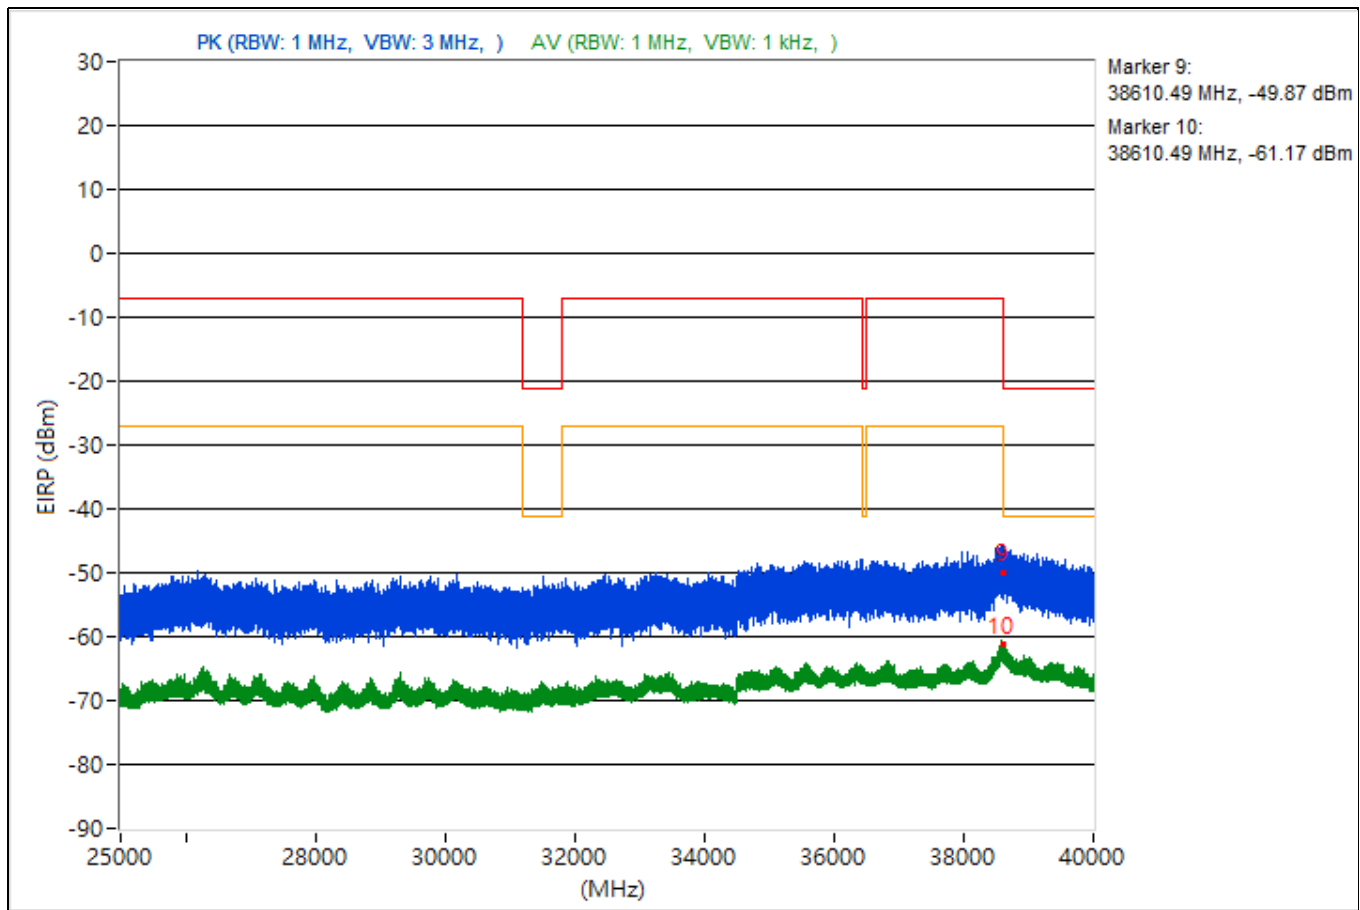


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3672.91	48.88 PK	74	-25.12	-54.68	-53.96	4.92	-46.38
2	3672.91	37.14 AV	54	-16.86	-67.6	-64.91	4.92	-58.12
3	12334.76	49.15 PK	74	-24.85	-53.67	-54.44	4.92	-46.11
4	12334.76	37.61 AV	54	-16.39	-65.82	-65.36	4.92	-57.65
5	19427.5	50.01 PK	74	-23.99	-54.82	-51.99	4.92	-45.25
6	19427.5	37.09 AV	54	-16.91	-68.5	-64.57	4.92	-58.17
7	22792.4	48.66 PK	74	-25.34	-52.84	-57.36	4.92	-46.6
8	22792.4	38.62 AV	54	-15.38	-63.16	-66.68	4.92	-56.64
9	38606.93	45.03 PK	74	-28.97	-60.07	-56.84	4.92	-50.23
10	38606.93	33.76 AV	54	-20.24	-70.53	-68.55	4.92	-61.5

Note: Margin value = Emission Level - Limit value

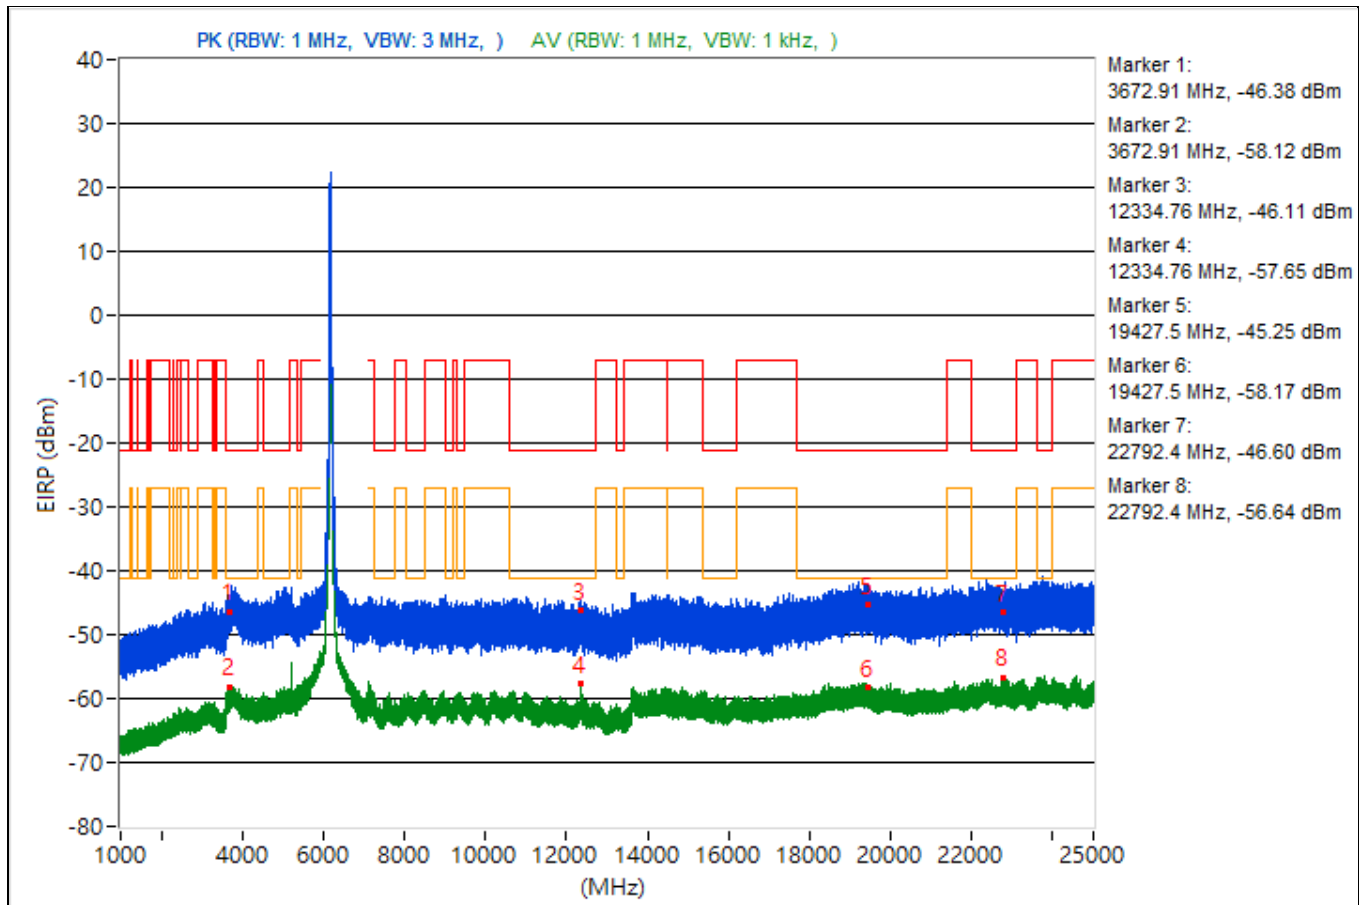


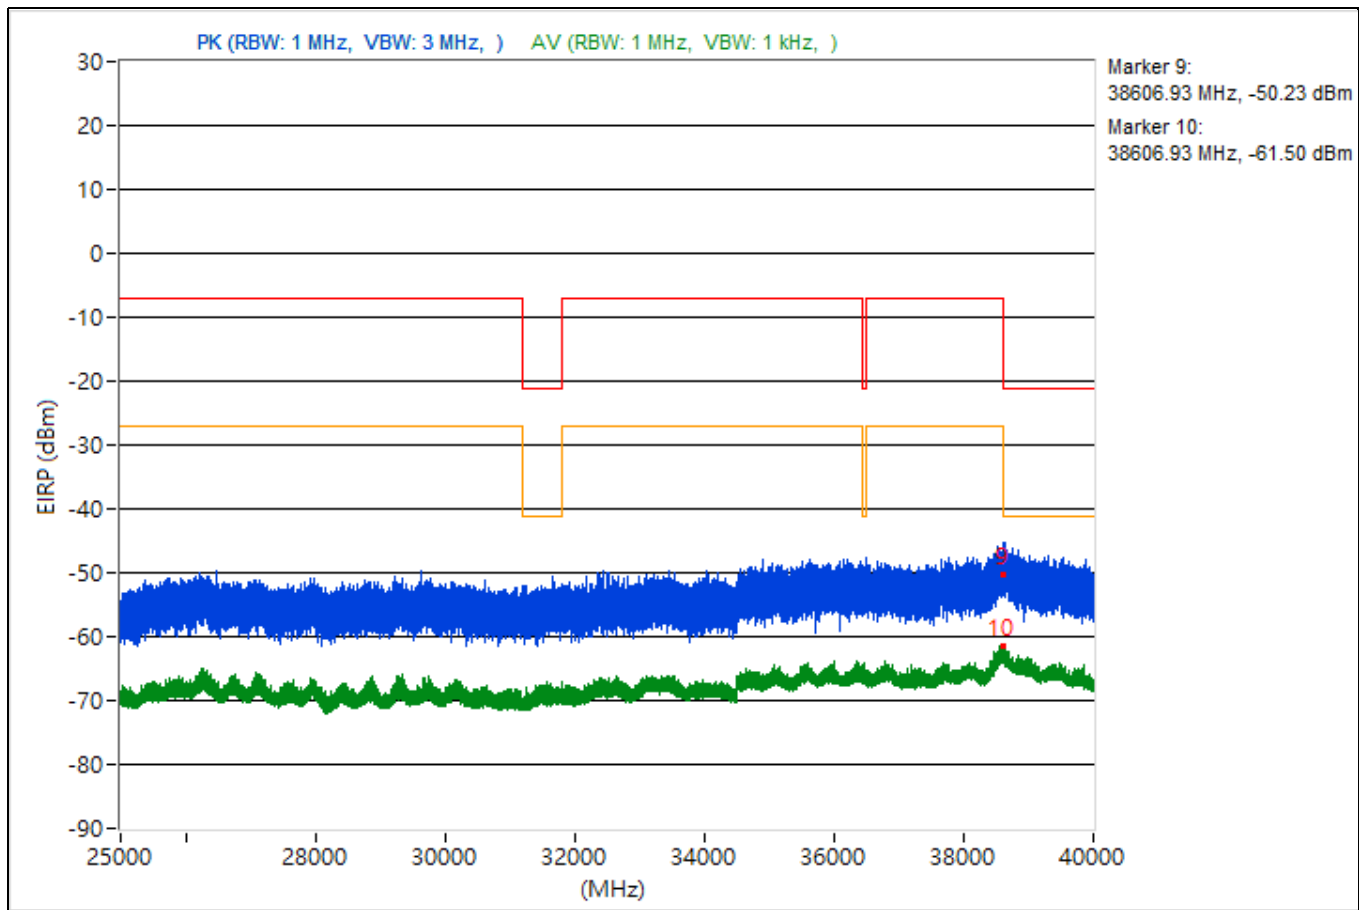


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5436.68	50.64 PK	74	-23.36	-51.89	-53.33	4.92	-44.62
2	5436.68	40.32 AV	54	-13.68	-62.49	-63.28	4.92	-54.94
3	8493.51	44.97 PK	74	-29.03	-60.9	-56.57	4.92	-50.29
4	8493.51	36.15 AV	54	-17.85	-65.71	-68.98	4.92	-59.11
5	19189.5	48.96 PK	74	-25.04	-55.98	-52.99	4.92	-46.3
6	19189.5	38.4 AV	54	-15.6	-66	-63.85	4.92	-56.86
7	22410	51.61 PK	74	-22.39	-54.23	-49.95	4.92	-43.65
8	22410	38.52 AV	54	-15.48	-63.22	-66.88	4.92	-56.74
9	38612.36	48.12 PK	74	-25.88	-54.25	-56.08	4.92	-47.14
10	38612.36	34.37 AV	54	-19.63	-70.11	-67.83	4.92	-60.89

Note: Margin value = Emission Level - Limit value

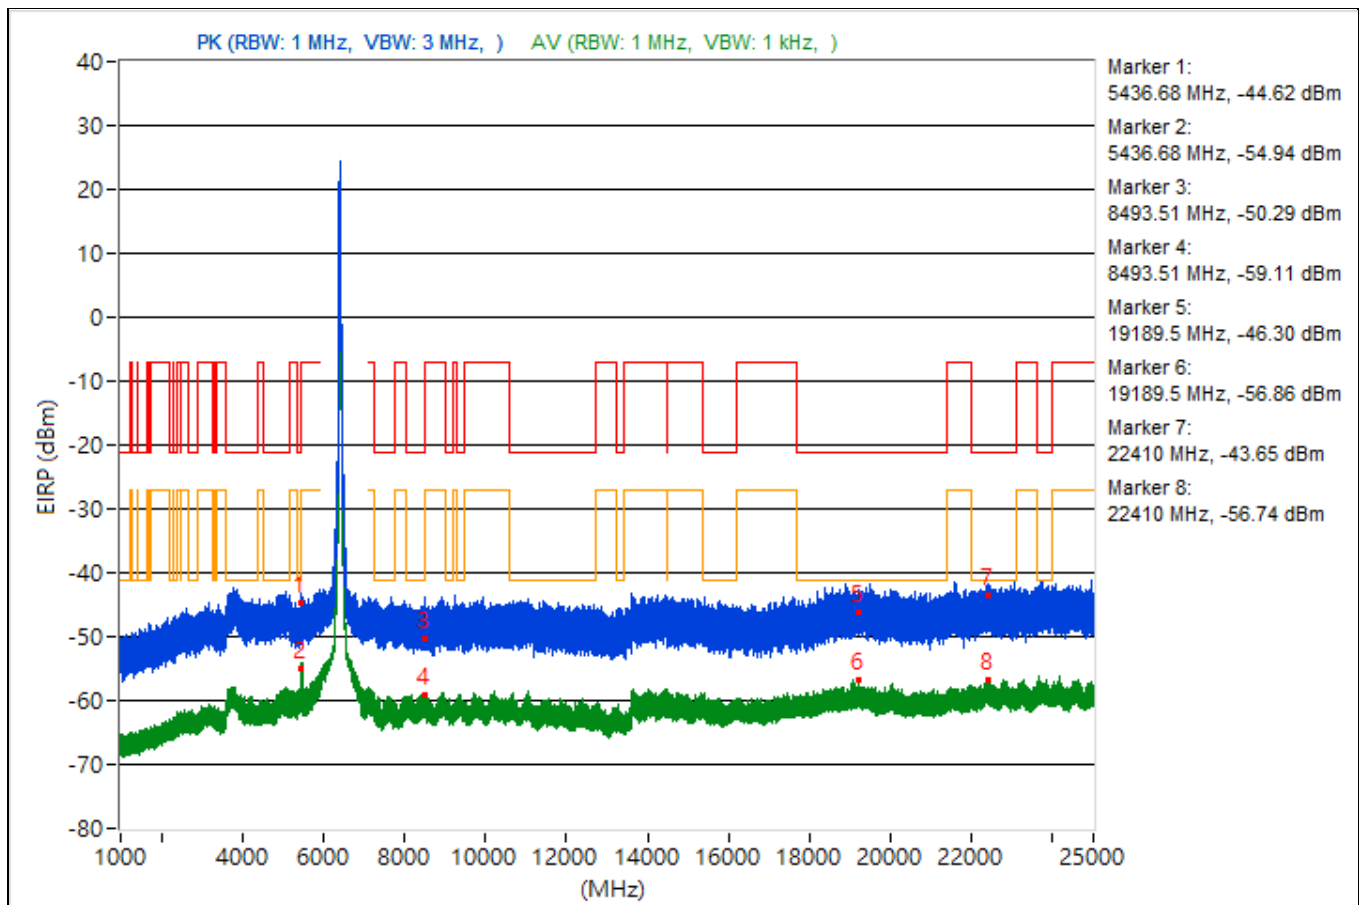


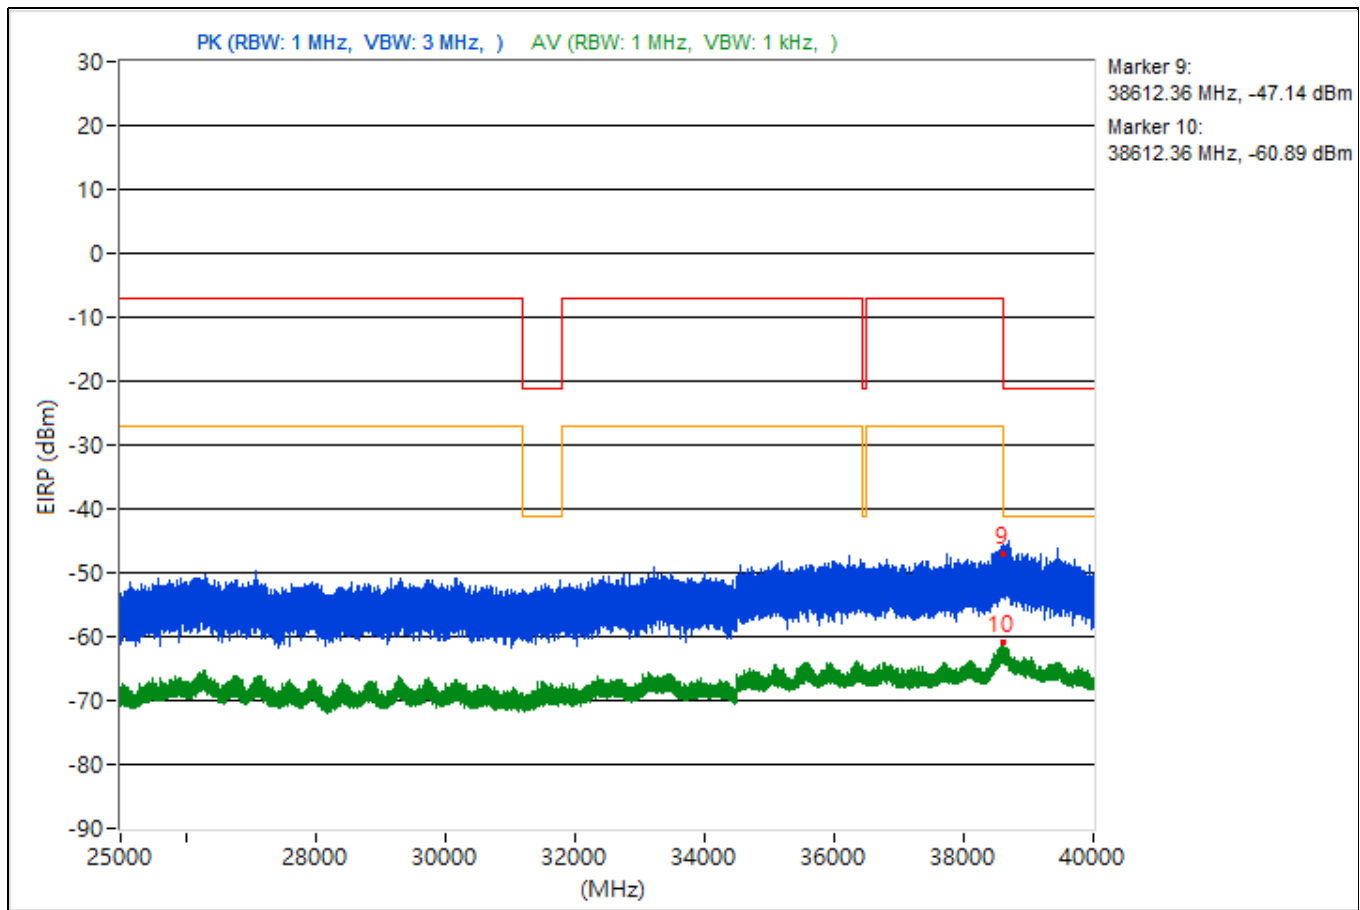


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3726.73	50.18 PK	74	-23.82	-54.1	-52.14	4.92	-45.08
2	3726.73	37.15 AV	54	-16.85	-64.93	-67.53	4.92	-58.11
3	14475.38	47.95 PK	74	-26.05	-57.79	-53.64	4.92	-47.31
4	14475.38	36.65 AV	54	-17.35	-67.99	-65.45	4.92	-58.61
5	19347.6	48.47 PK	74	-25.53	-55.71	-53.91	4.92	-46.79
6	19347.6	37.49 AV	54	-16.51	-67.81	-64.29	4.92	-57.77
7	22379.6	48.56 PK	74	-25.44	-56.42	-53.37	4.92	-46.7
8	22379.6	38.32 AV	54	-15.68	-63.5	-66.89	4.92	-56.94
9	38631.91	46.75 PK	74	-27.25	-57.08	-55.89	4.92	-48.51
10	38631.91	33.88 AV	54	-20.12	-71.66	-67.79	4.92	-61.38

Note: Margin value = Emission Level - Limit value

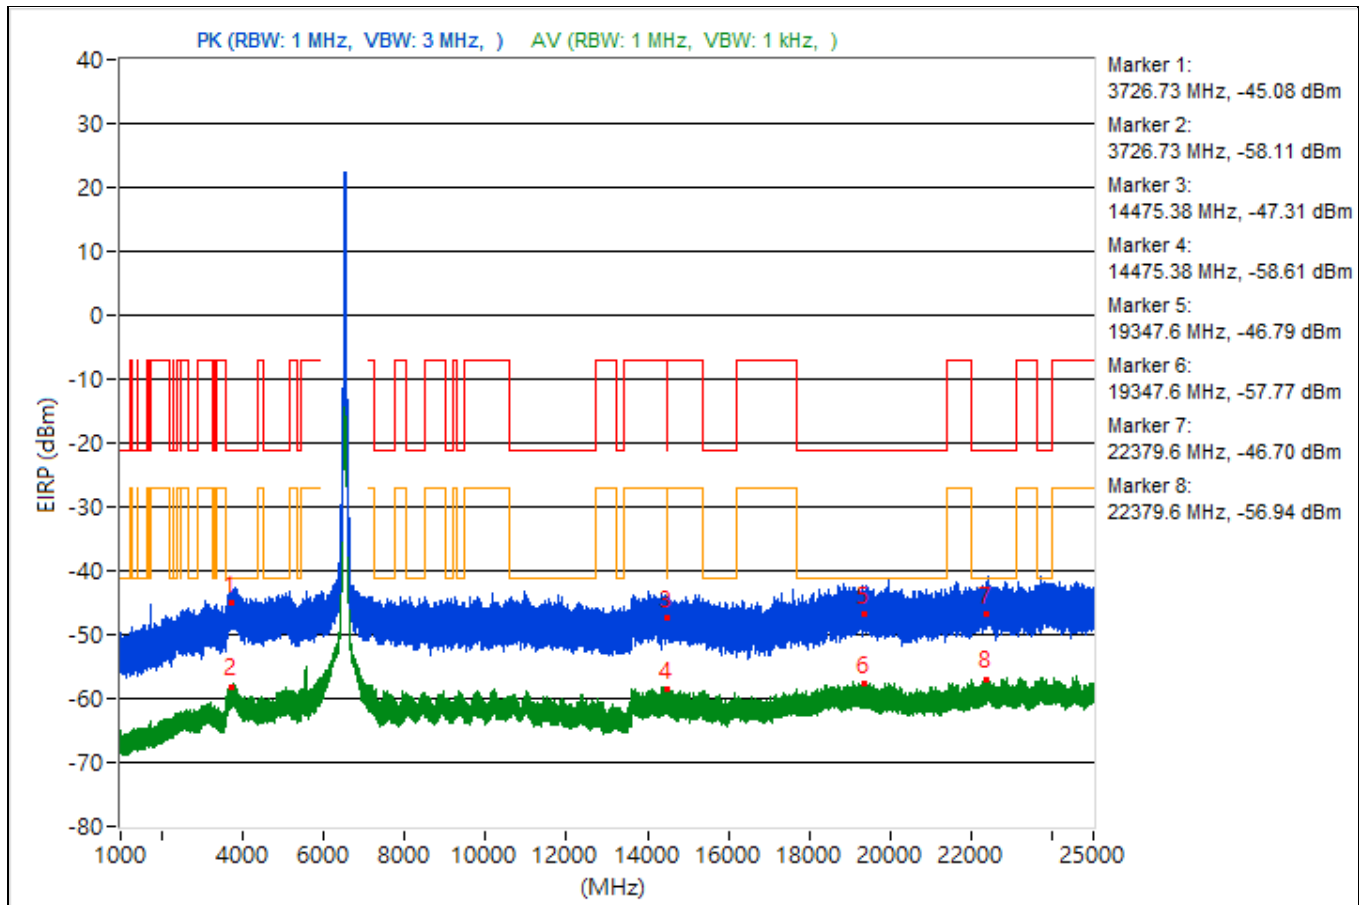


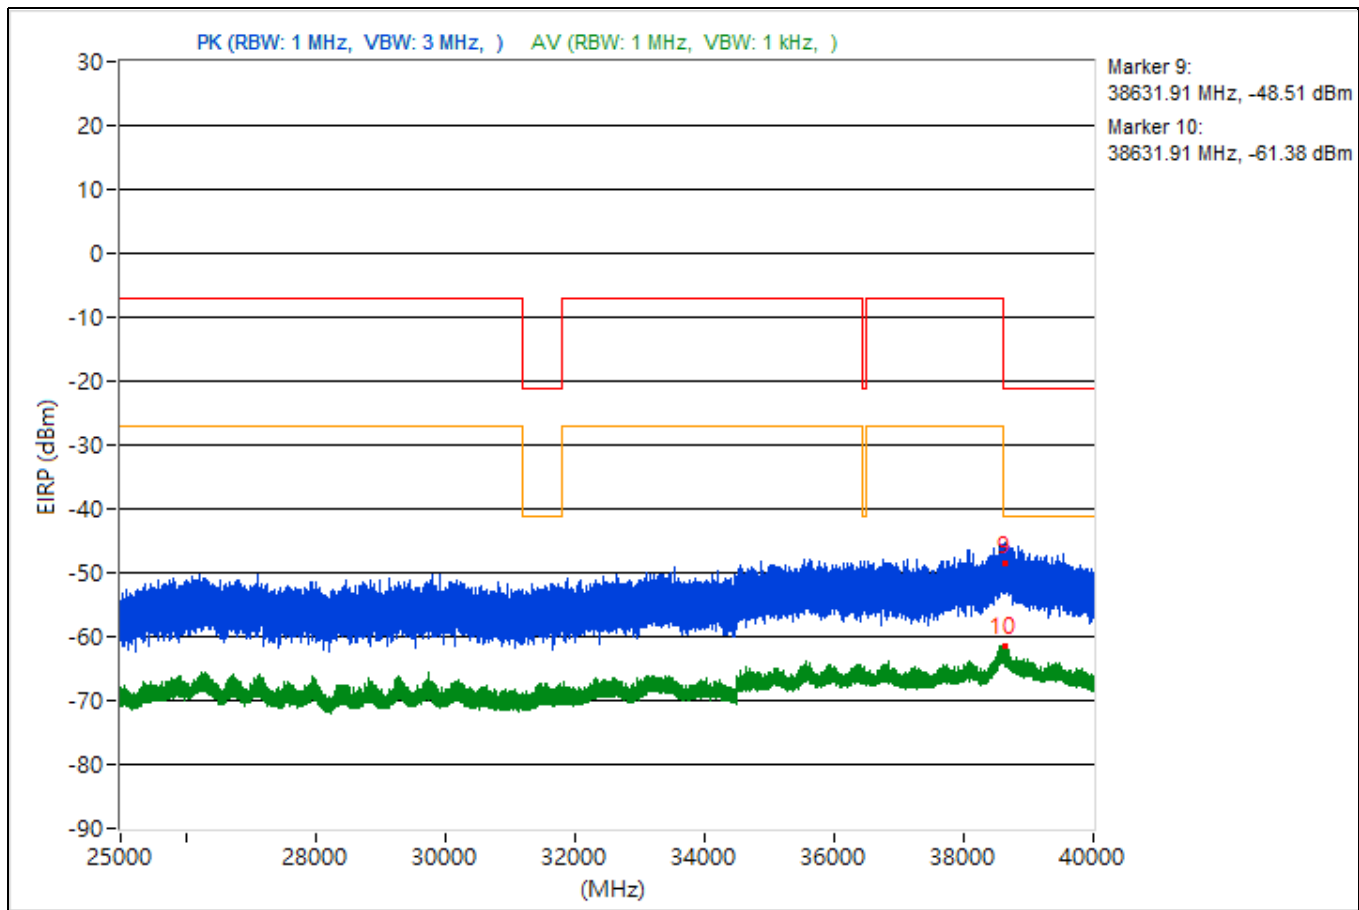


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3716.86	50.41 PK	74	-23.59	-52.11	-53.59	4.92	-44.85
2	3716.86	37.42 AV	54	-16.58	-67.12	-64.74	4.92	-57.84
3	7638.64	45.91 PK	74	-28.09	-57.68	-56.91	4.92	-49.35
4	7638.64	37.24 AV	54	-16.76	-67.2	-64.97	4.92	-58.02
5	19468.2	48.23 PK	74	-25.77	-58.34	-53.09	4.92	-47.03
6	19468.2	37.53 AV	54	-16.47	-64.21	-67.86	4.92	-57.73
7	22827.8	50.05 PK	74	-23.95	-53.54	-52.78	4.92	-45.21
8	22827.8	39 AV	54	-15	-65.36	-63.27	4.92	-56.26
9	38678.67	42.99 PK	74	-31.01	-58.96	-61.94	4.92	-52.27
10	38678.67	33.69 AV	54	-20.31	-68.36	-71.07	4.92	-61.57

Note: Margin value = Emission Level - Limit value

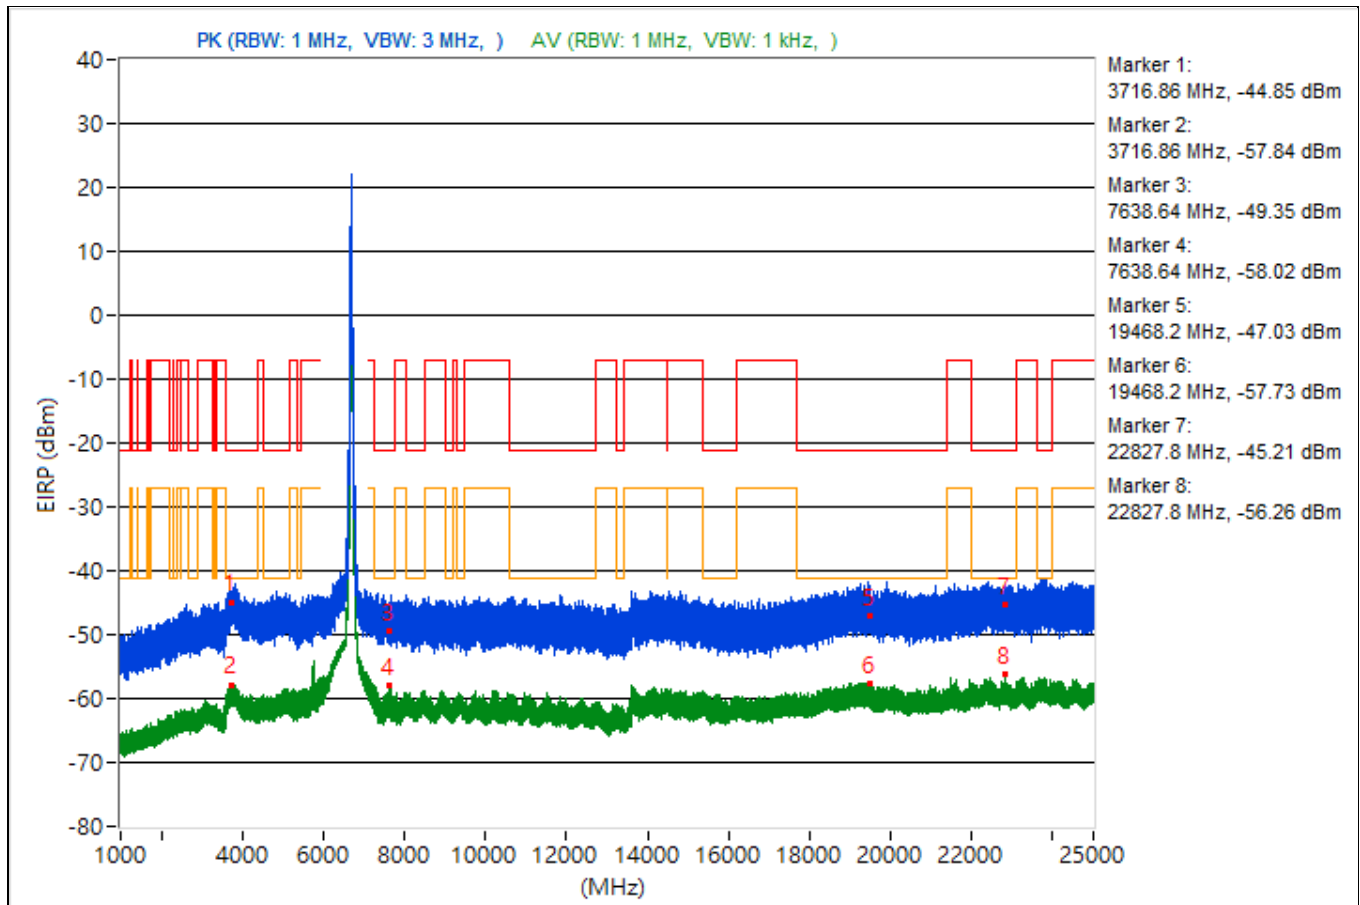


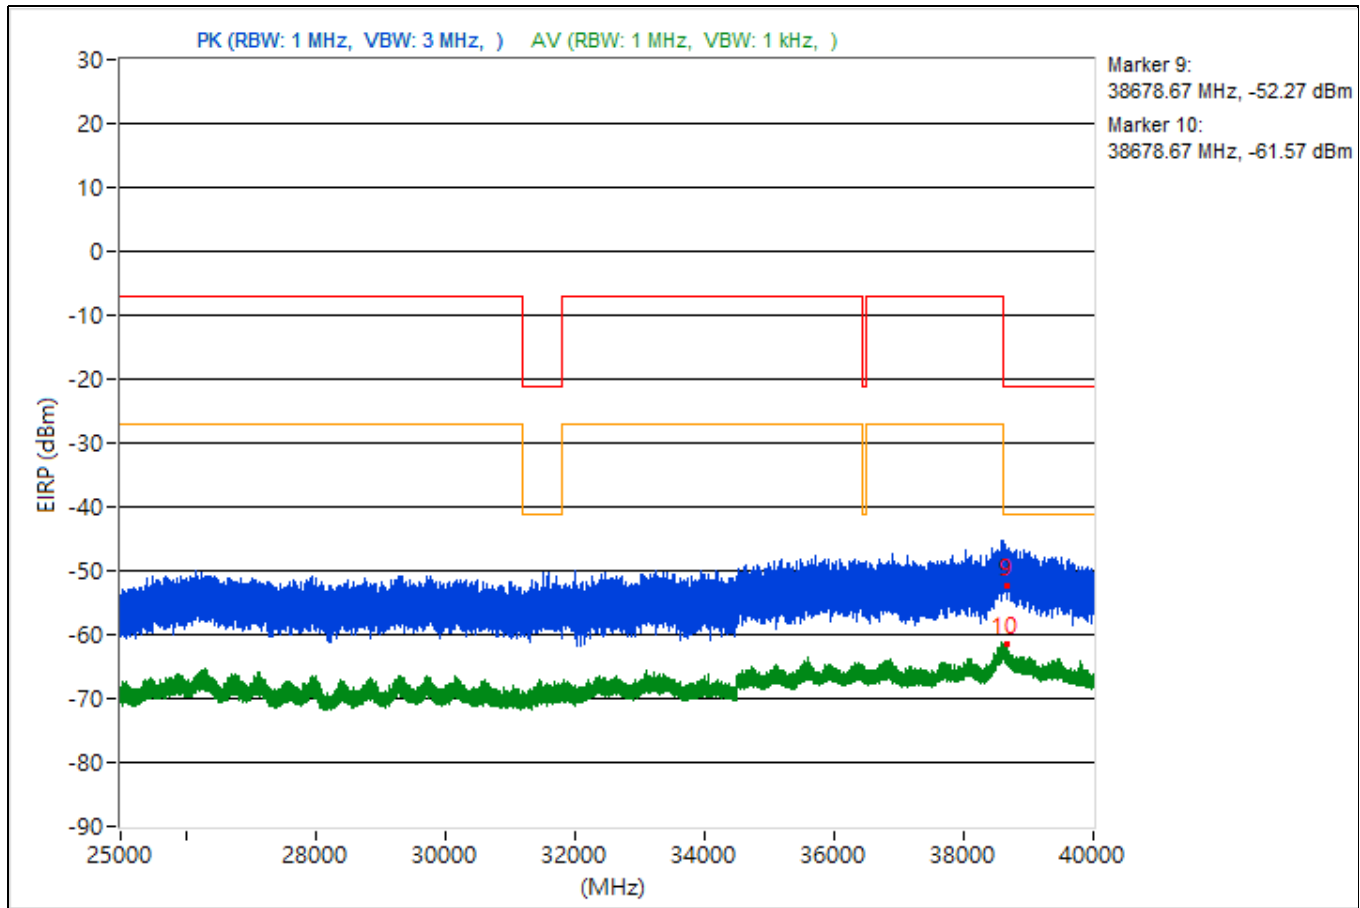


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3747.66	48.45 PK	74	-25.55	-54.08	-55.52	4.92	-46.81
2	3747.66	37.47 AV	54	-16.53	-64.59	-67.25	4.92	-57.79
3	7258.62	48.92 PK	74	-25.08	-53.75	-54.87	4.92	-46.34
4	7258.62	37.85 AV	54	-16.15	-66.47	-64.44	4.92	-57.41
5	19100.7	51.26 PK	74	-22.74	-49.98	-55.55	4.92	-44
6	19100.7	37.68 AV	54	-16.32	-67.22	-64.29	4.92	-57.58
7	23935.6	48.82 PK	74	-25.18	-54.92	-53.89	4.92	-46.44
8	23935.6	38.37 AV	54	-15.63	-66.59	-63.57	4.92	-56.89
9	38604.09	45.23 PK	74	-28.77	-59.79	-56.67	4.92	-50.03
10	38604.09	34.21 AV	54	-19.79	-69.87	-68.25	4.92	-61.05

Note: Margin value = Emission Level - Limit value

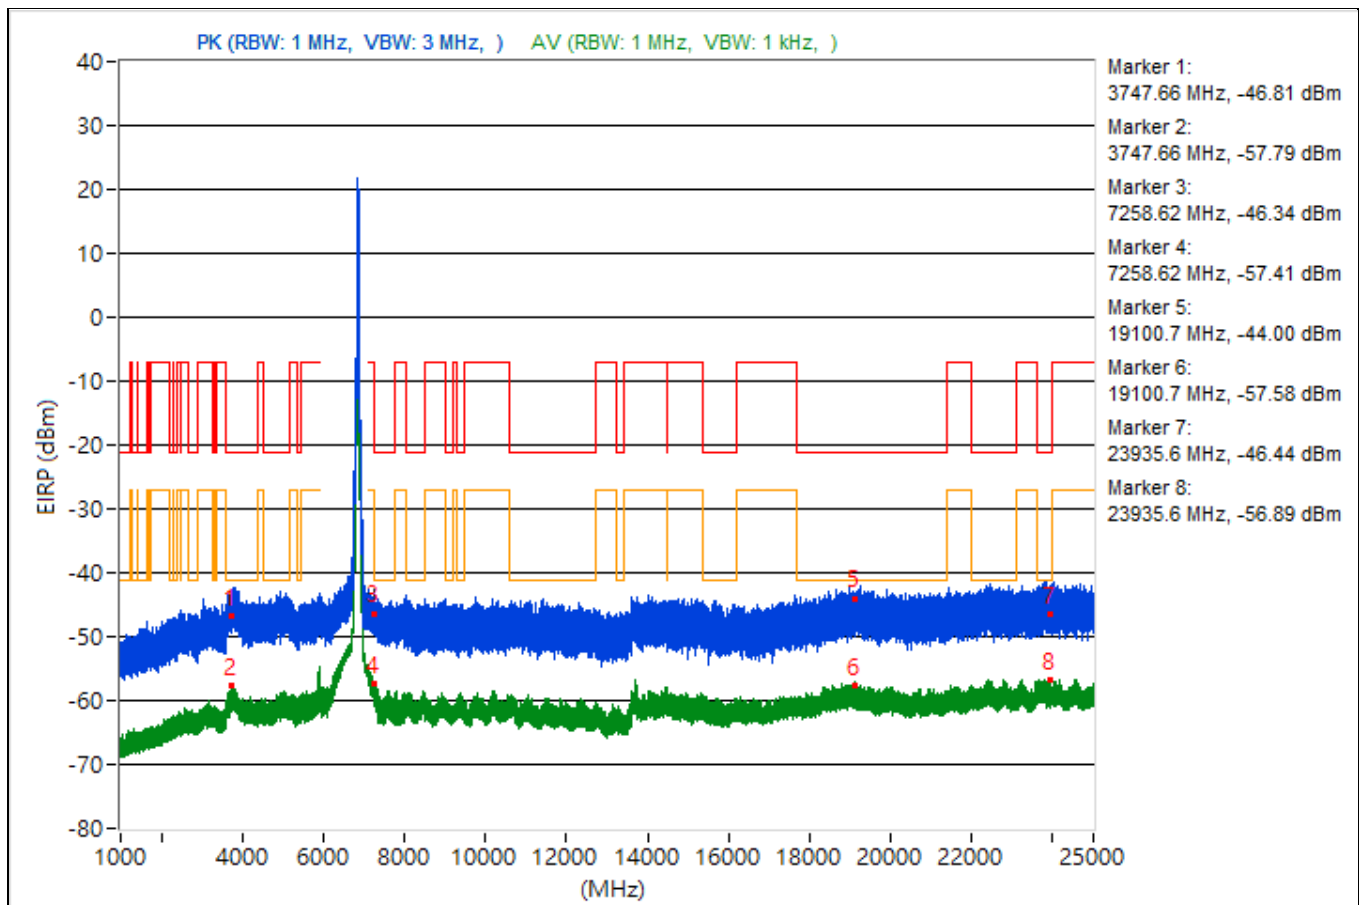


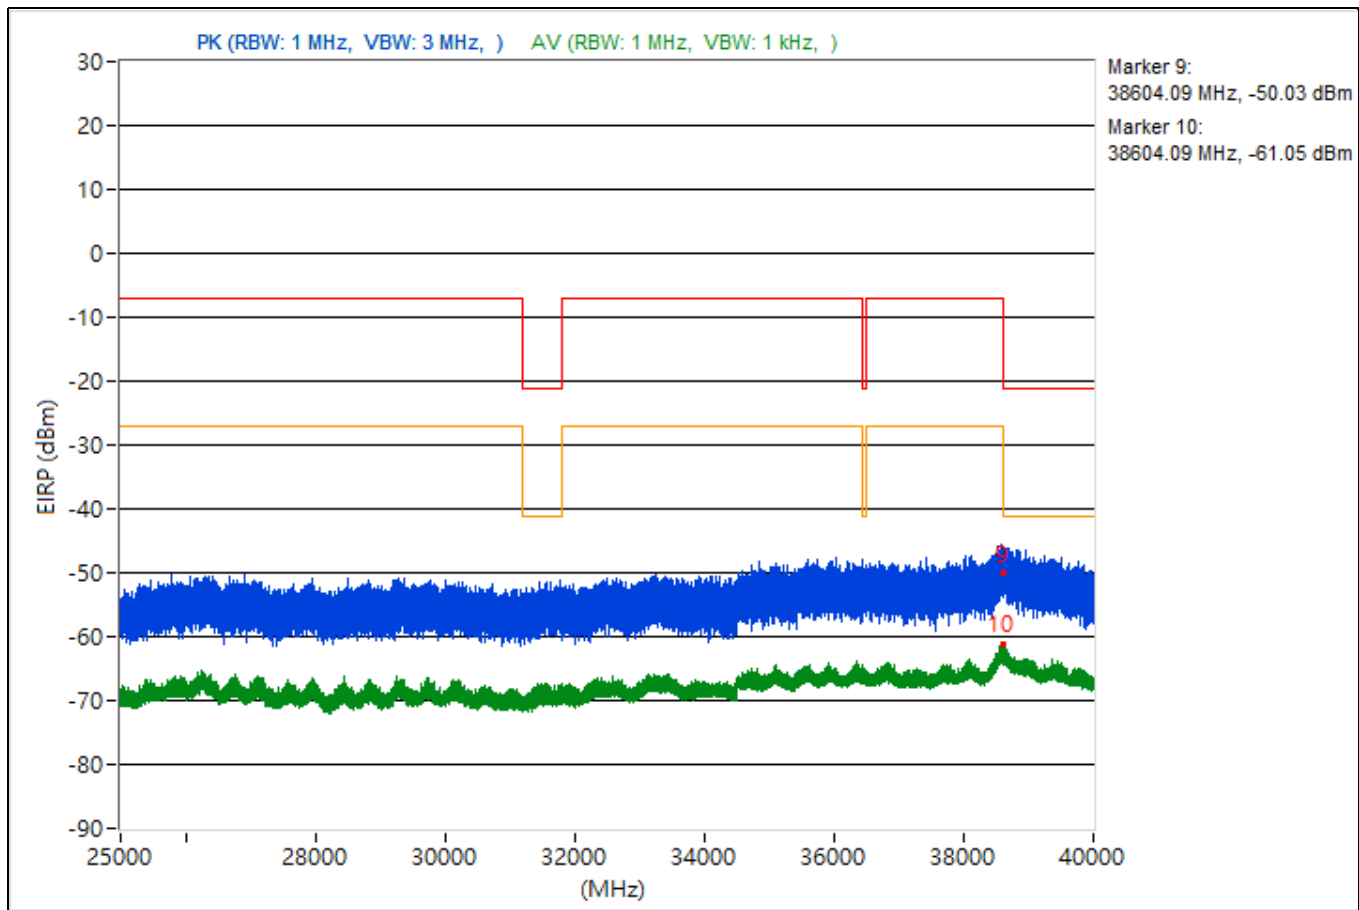


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5020.64	50.98 PK	74	-23.02	-52.07	-52.36	4.92	-44.28
2	5020.64	39.38 AV	54	-14.62	-64.4	-63.29	4.92	-55.88
3	14476.89	47.87 PK	74	-26.13	-55.76	-54.92	4.92	-47.39
4	14476.89	36.31 AV	54	-17.69	-70.1	-65.05	4.92	-58.95
5	18724.8	48.29 PK	74	-25.71	-54.45	-55.41	4.92	-46.97
6	18724.8	37.52 AV	54	-16.48	-64.41	-67.47	4.92	-57.74
7	22853.3	49.92 PK	74	-24.08	-52.55	-54.14	4.92	-45.34
8	22853.3	38.6 AV	54	-15.4	-63.1	-66.89	4.92	-56.66
9	38609.33	46.78 PK	74	-27.22	-57.26	-55.7	4.92	-48.48
10	38609.33	33.26 AV	54	-20.74	-70.77	-69.22	4.92	-62

Note: Margin value = Emission Level - Limit value

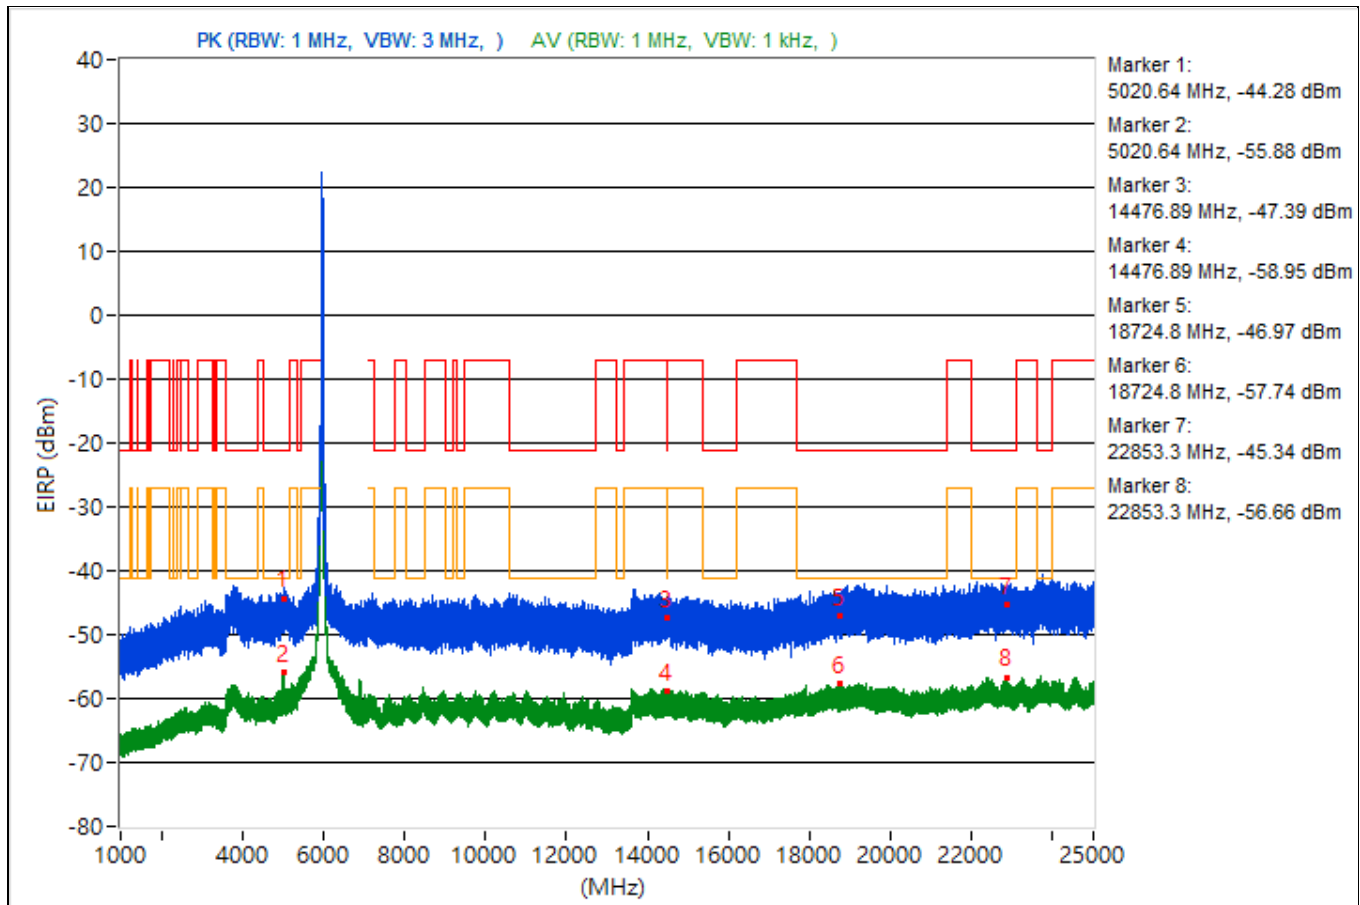


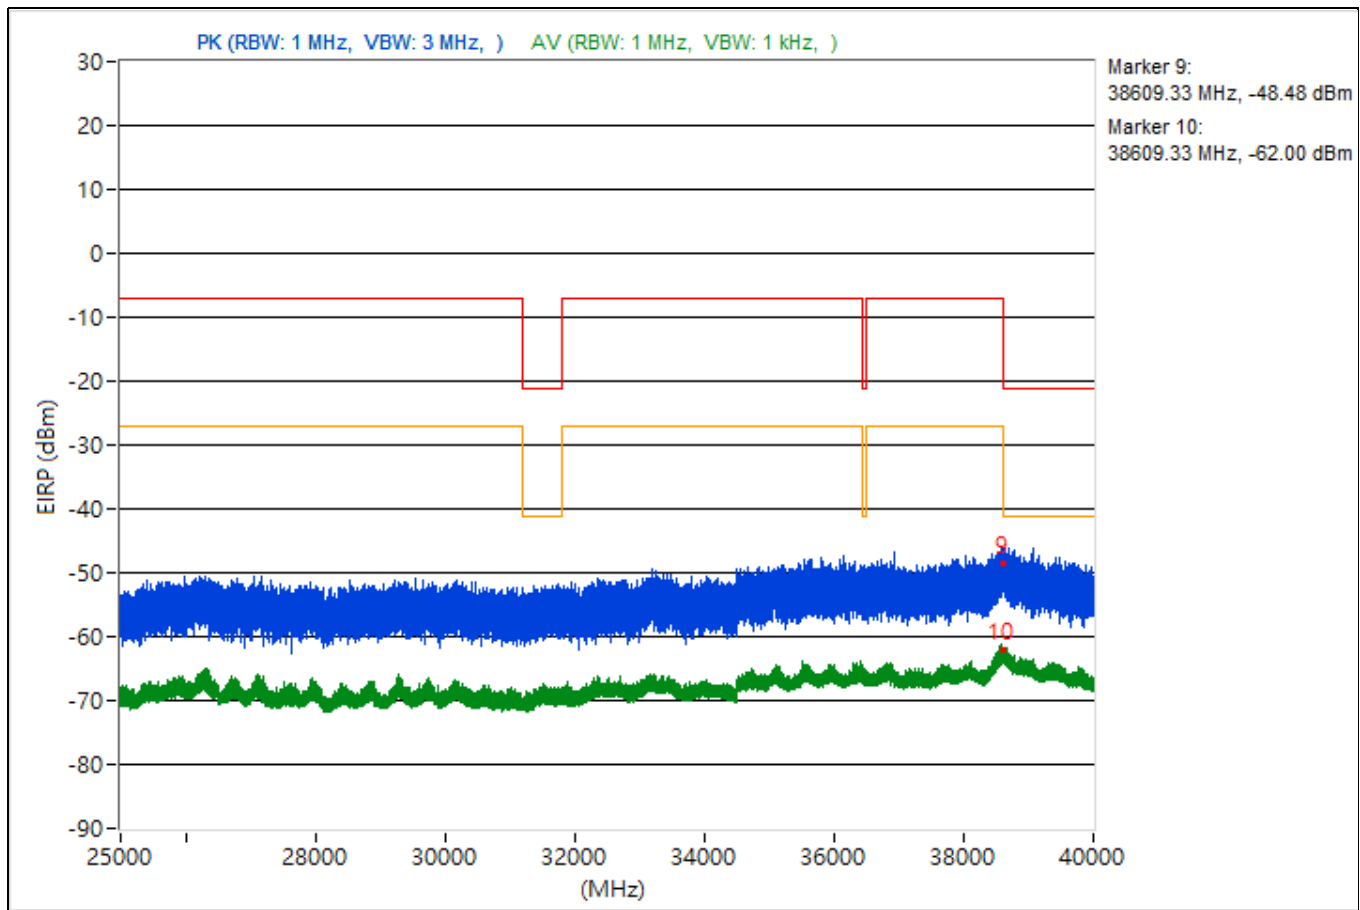


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.06	51.19 PK	74	-22.81	-53.37	-50.96	4.92	-44.07
2	3805.06	37.33 AV	54	-16.67	-64.47	-67.91	4.92	-57.93
3	12333.07	47.02 PK	74	-26.98	-54.96	-57.87	4.92	-48.24
4	12333.07	37.24 AV	54	-16.76	-64.43	-68.32	4.92	-58.02
5	18730.3	50.71 PK	74	-23.29	-52.94	-52.07	4.92	-44.55
6	18730.3	37.55 AV	54	-16.45	-64.5	-67.2	4.92	-57.71
7	23668.8	47.83 PK	74	-26.17	-56.22	-54.64	4.92	-47.43
8	23668.8	39.02 AV	54	-14.98	-66.85	-62.53	4.92	-56.24
9	38608.8	44.27 PK	74	-29.73	-58.1	-59.93	4.92	-50.99
10	38608.8	34.1 AV	54	-19.9	-68.41	-69.9	4.92	-61.16

Note: Margin value = Emission Level - Limit value

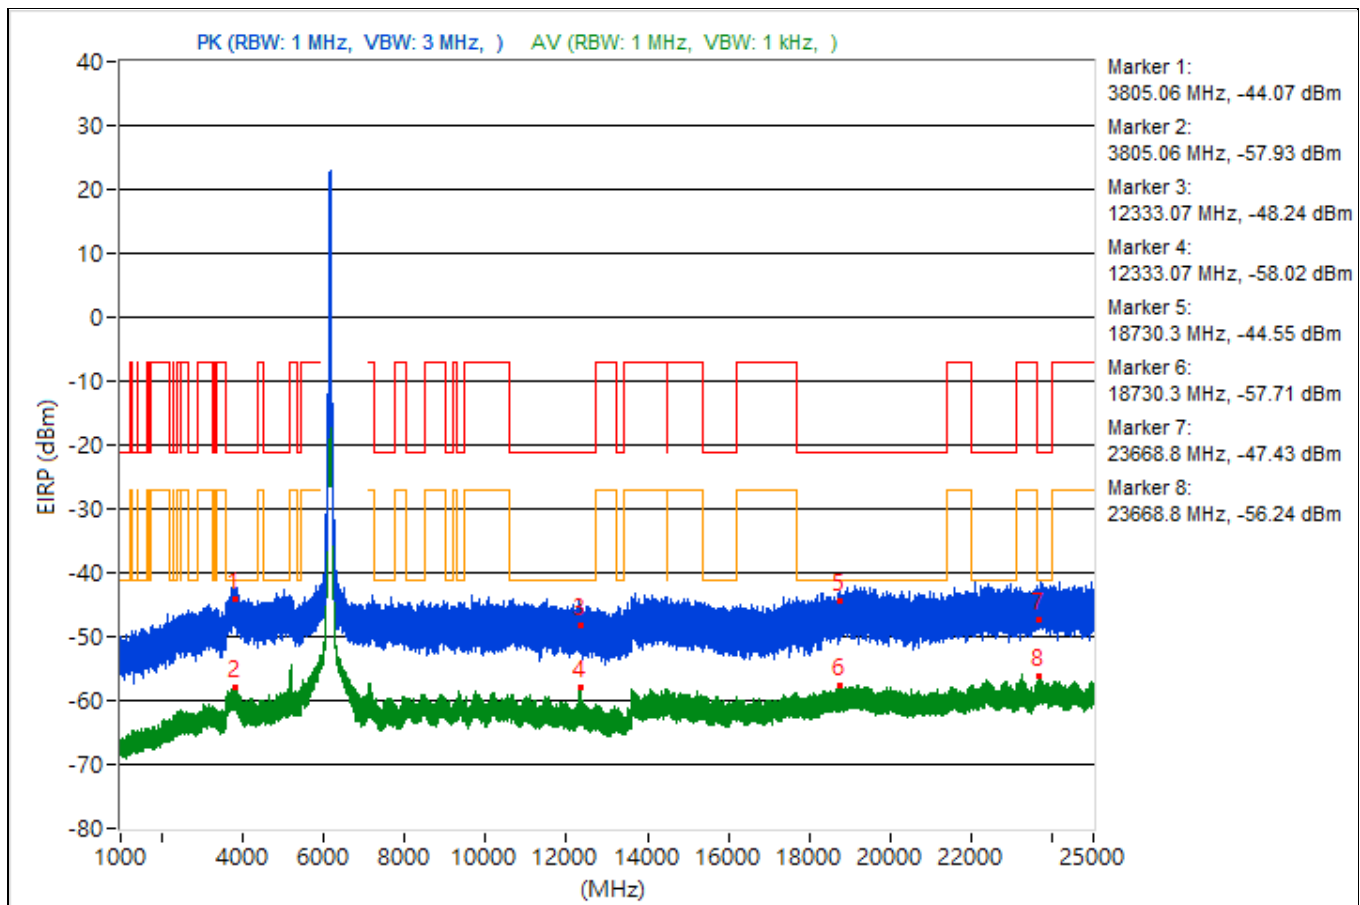


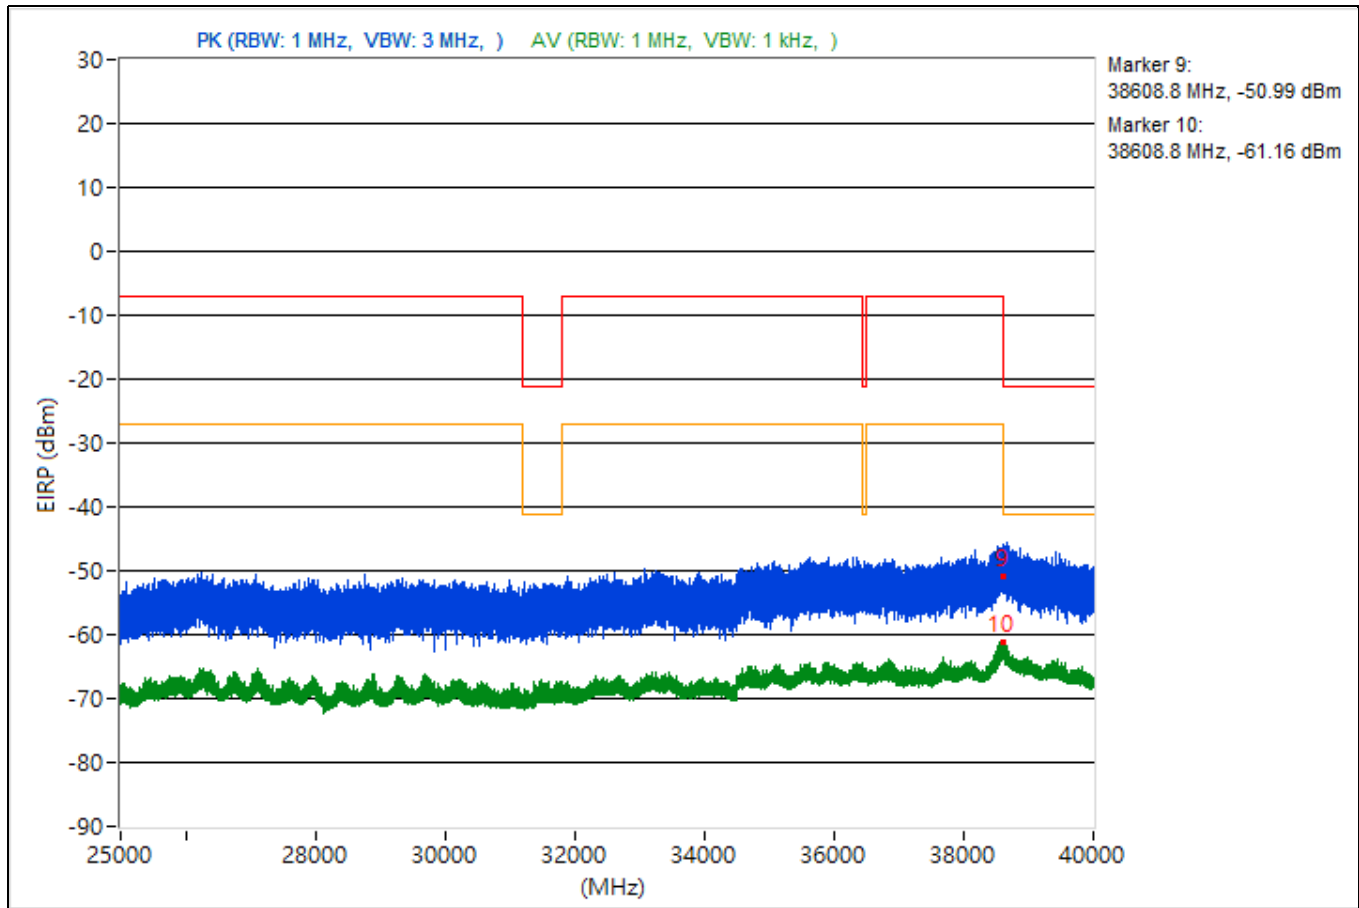


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.84	48.83 PK	74	-25.17	-54.57	-54.16	4.92	-46.43
2	5458.84	40.47 AV	54	-13.53	-63.04	-62.42	4.92	-54.79
3	7349.08	46.42 PK	74	-27.58	-56.92	-56.62	4.92	-48.84
4	7349.08	36.67 AV	54	-17.33	-65.21	-68.41	4.92	-58.59
5	19158.9	48.5 PK	74	-25.5	-55.27	-54.18	4.92	-46.76
6	19158.9	37.79 AV	54	-16.21	-66.87	-64.29	4.92	-57.47
7	22800.7	46.53 PK	74	-27.47	-57.14	-56.24	4.92	-48.73
8	22800.7	38.38 AV	54	-15.62	-66.21	-63.75	4.92	-56.88
9	38600.27	47.56 PK	74	-26.44	-56.93	-54.62	4.92	-47.7
10	38600.27	34.01 AV	54	-19.99	-67.99	-70.82	4.92	-61.25

Note: Margin value = Emission Level - Limit value

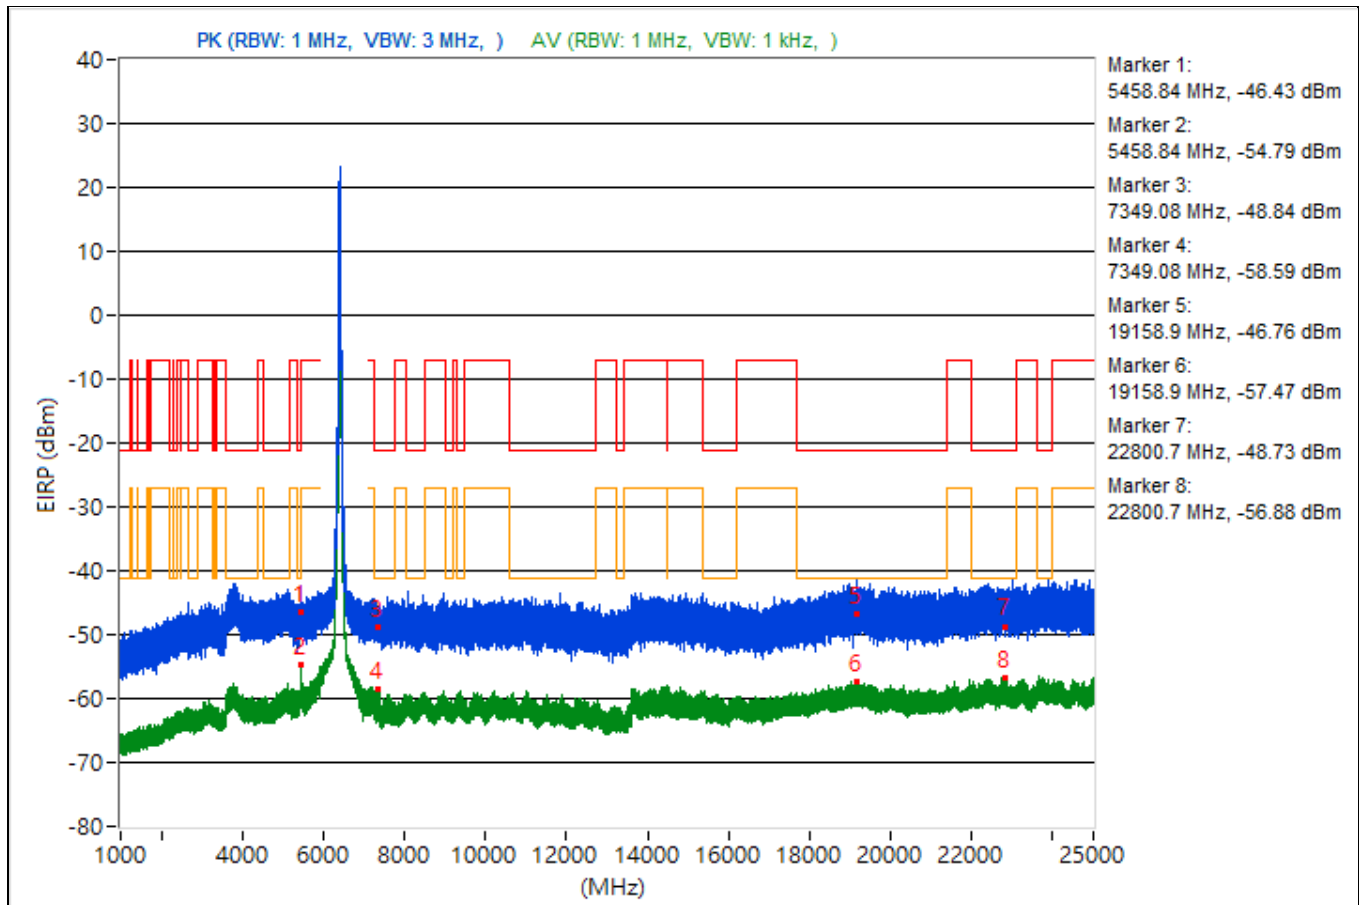


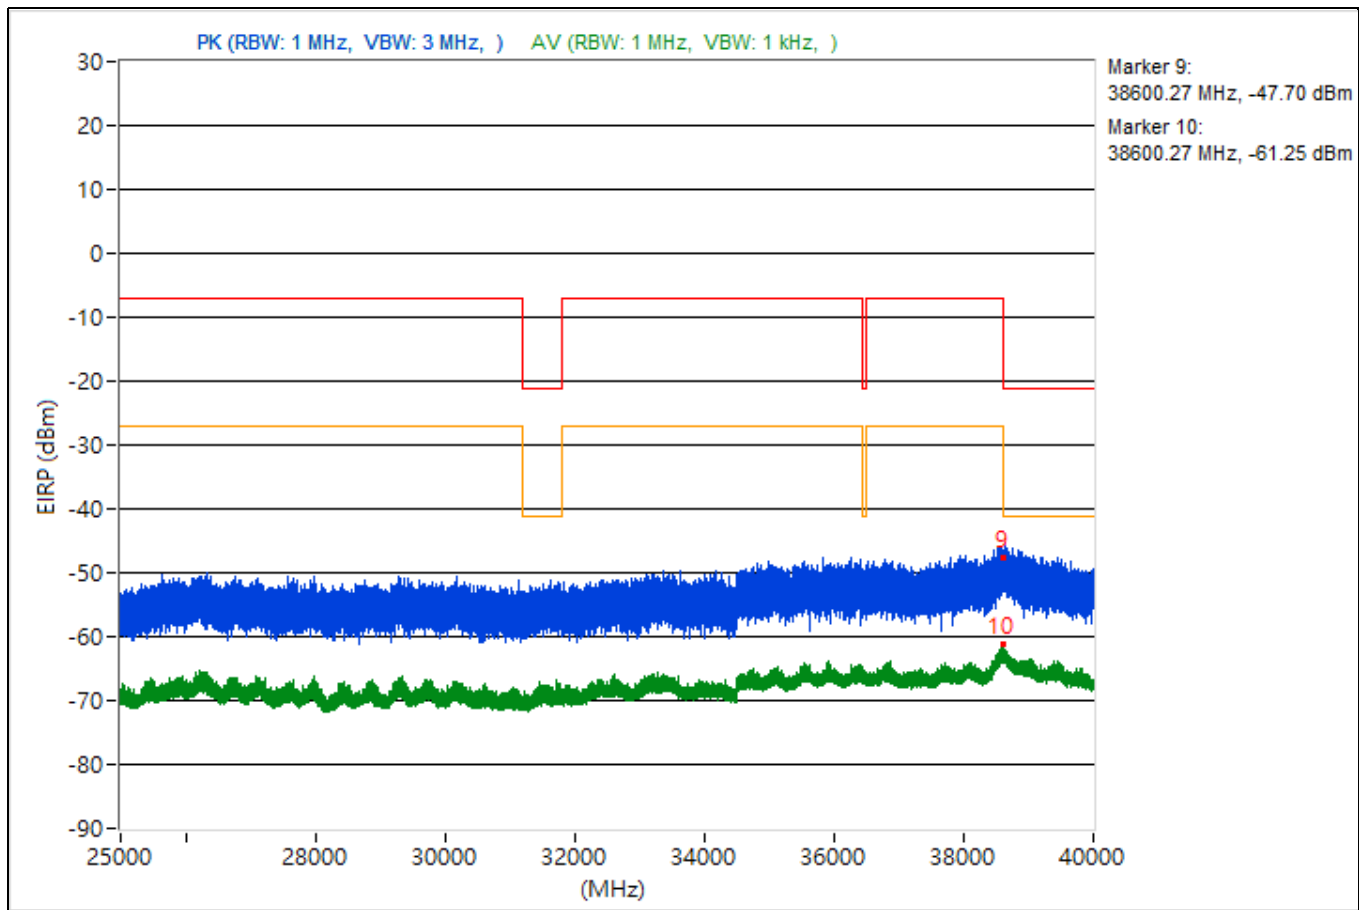


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3731.09	49.44 PK	74	-24.56	-53.33	-54.21	4.92	-45.82
2	3731.09	37.67 AV	54	-16.33	-68.47	-63.78	4.92	-57.59
3	15390.04	46.34 PK	74	-27.66	-56.31	-57.47	4.92	-48.92
4	15390.04	36.45 AV	54	-17.55	-68.8	-65.34	4.92	-58.81
5	18973.7	50.83 PK	74	-23.17	-52.79	-51.96	4.92	-44.43
6	18973.7	37.85 AV	54	-16.15	-63.99	-67.3	4.92	-57.41
7	22815.6	50.35 PK	74	-23.65	-51.96	-53.93	4.92	-44.91
8	22815.6	38.18 AV	54	-15.82	-67.66	-63.38	4.92	-57.08
9	38616.62	47.51 PK	74	-26.49	-54.94	-56.57	4.92	-47.75
10	38616.62	34.31 AV	54	-19.69	-67.38	-71.17	4.92	-60.95

Note: Margin value = Emission Level - Limit value

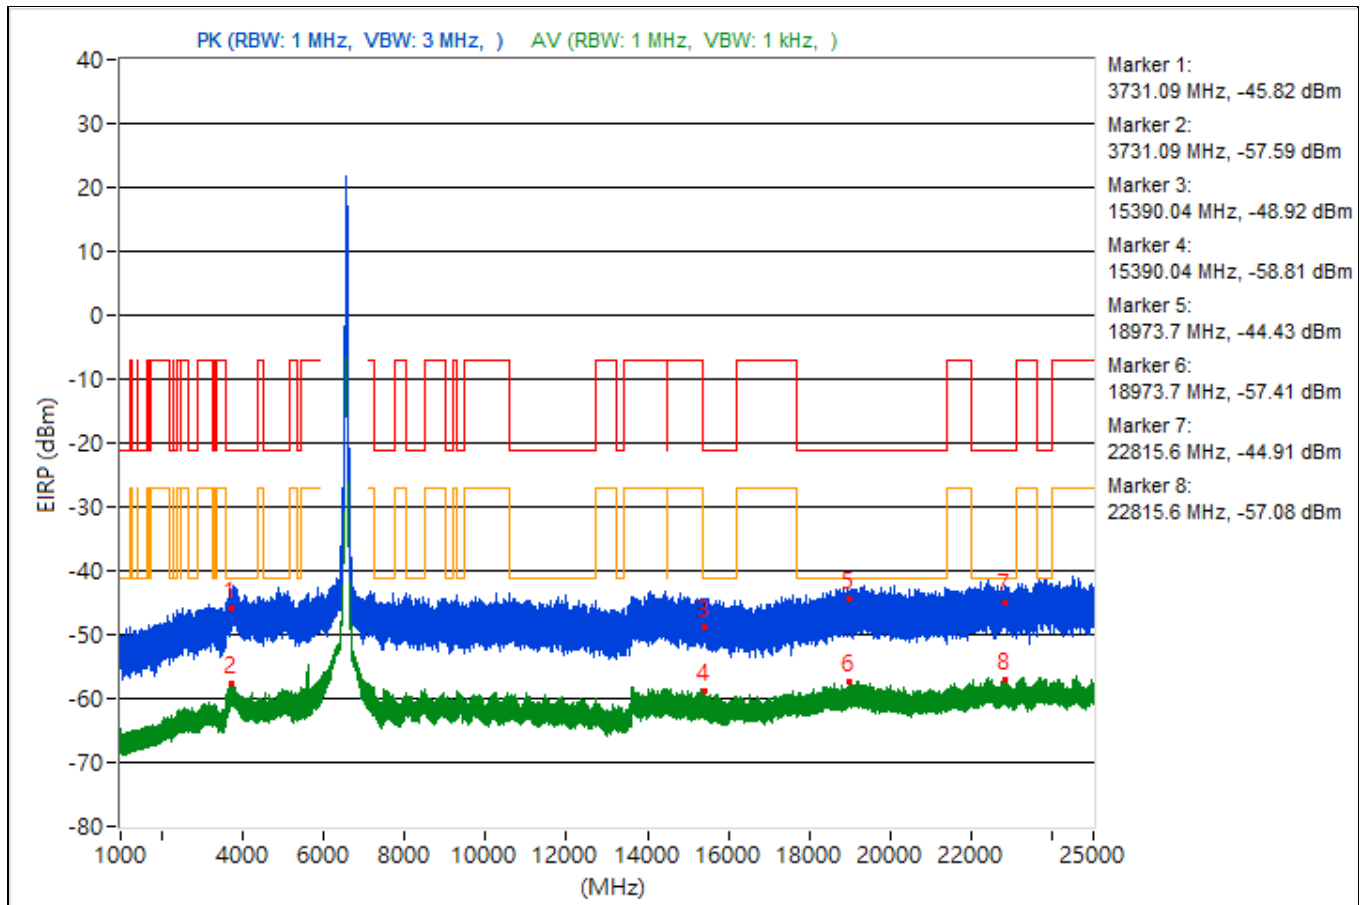


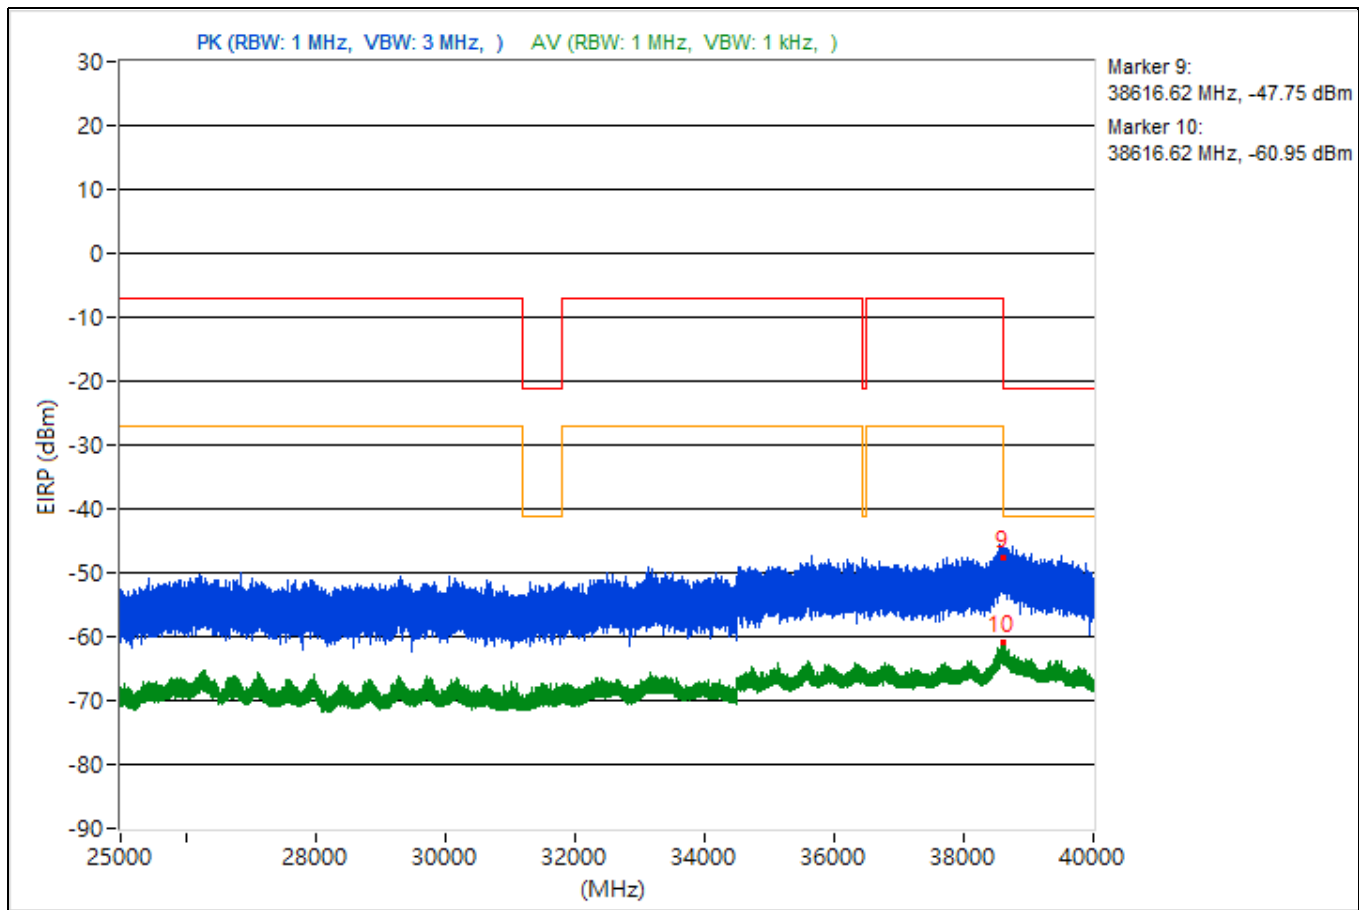


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.07	49.68 PK	74	-24.32	-54.05	-53.03	4.92	-45.58
2	3792.07	38.08 AV	54	-15.92	-66.9	-63.85	4.92	-57.18
3	7667.89	49.89 PK	74	-24.11	-55.11	-52.03	4.92	-45.37
4	7667.89	37.55 AV	54	-16.45	-66.54	-64.89	4.92	-57.71
5	18653.8	49.56 PK	74	-24.44	-52.11	-56	4.92	-45.7
6	18653.8	37.43 AV	54	-16.57	-68.79	-63.99	4.92	-57.83
7	23621	49.86 PK	74	-24.14	-54.46	-52.43	4.92	-45.4
8	23621	38.34 AV	54	-15.66	-63.54	-66.75	4.92	-56.92
9	38612.36	44.5 PK	74	-29.5	-57.33	-60.68	4.92	-50.76
10	38612.36	34.03 AV	54	-19.97	-68.83	-69.52	4.92	-61.23

Note: Margin value = Emission Level - Limit value

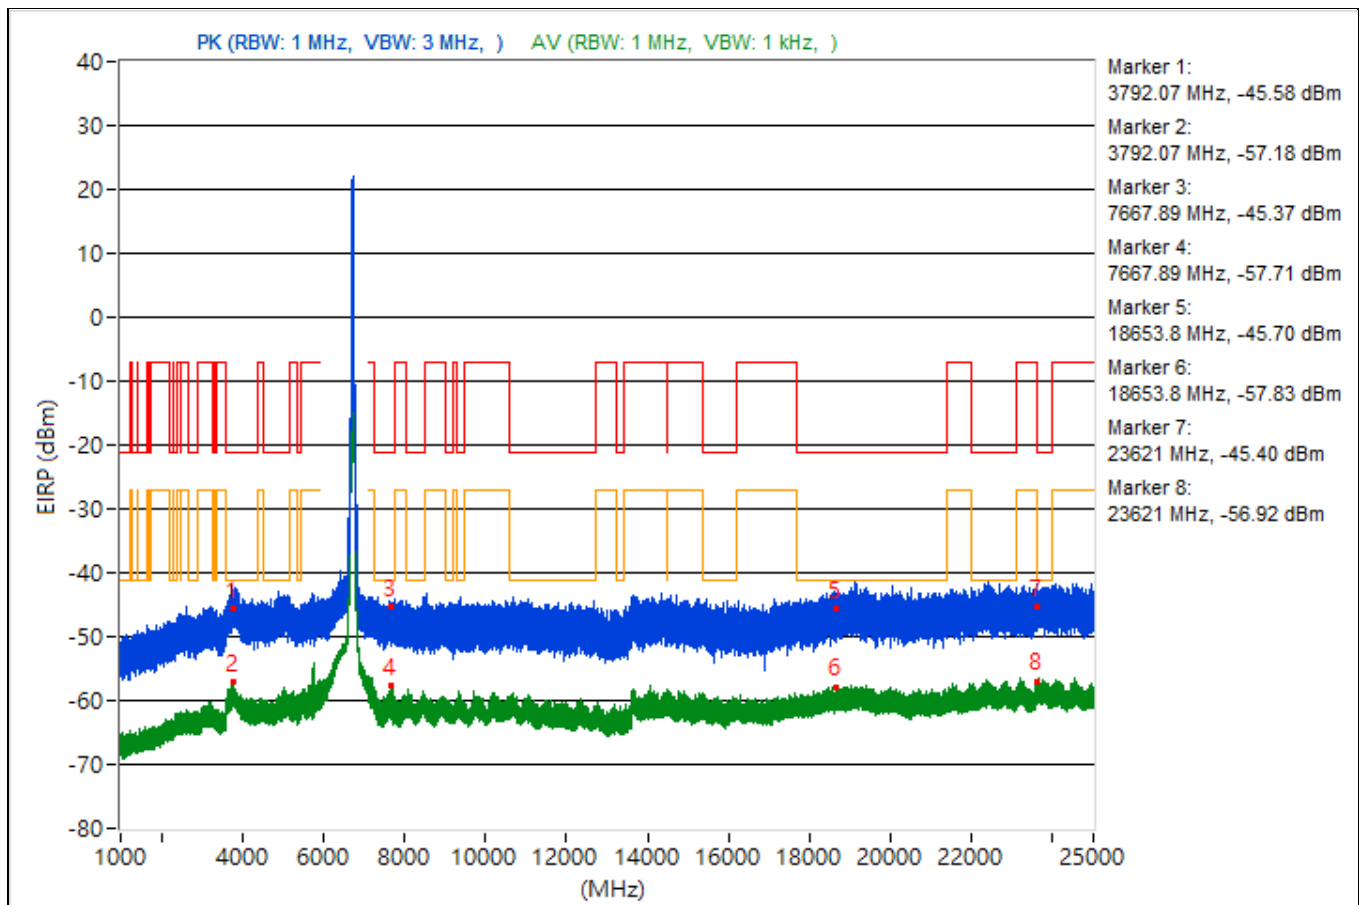


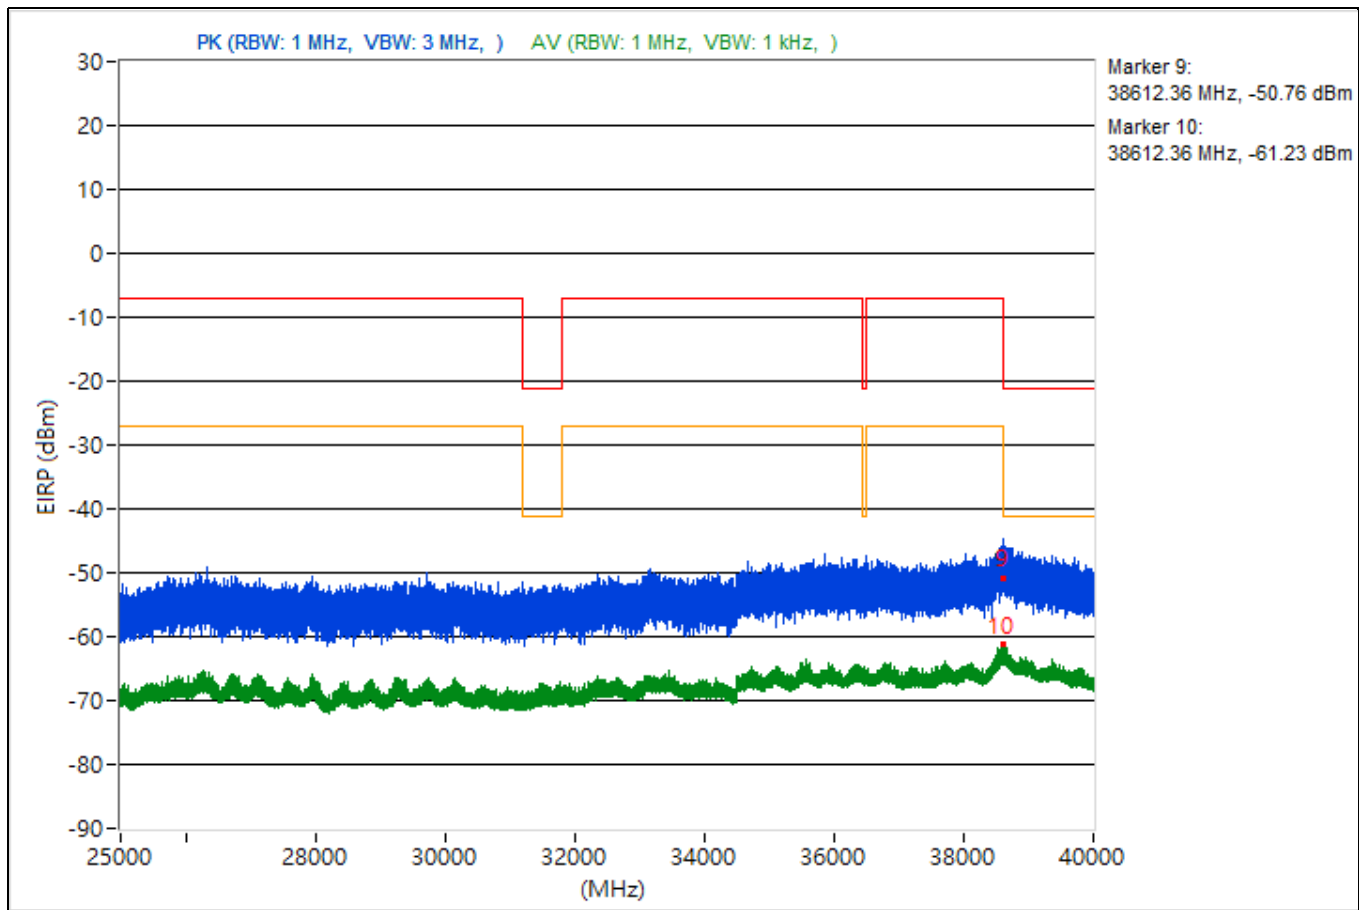


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.12	52.62 PK	74	-21.38	-49.53	-51.94	4.92	-42.64
2	3776.12	37.48 AV	54	-16.52	-66.71	-64.9	4.92	-57.78
3	7273.79	48.45 PK	74	-25.55	-54.39	-55.13	4.92	-46.81
4	7273.79	37.89 AV	54	-16.11	-63.86	-67.48	4.92	-57.37
5	19236.3	46.65 PK	74	-27.35	-55.49	-57.92	4.92	-48.61
6	19236.3	37.55 AV	54	-16.45	-64.08	-68.08	4.92	-57.71
7	23990.2	48.16 PK	74	-25.84	-55.64	-54.5	4.92	-47.1
8	23990.2	38.88 AV	54	-15.12	-66.21	-62.99	4.92	-56.38
9	38601.51	45.1 PK	74	-28.9	-56.74	-60.07	4.92	-50.16
10	38601.51	33.76 AV	54	-20.24	-70.28	-68.72	4.92	-61.5

Note: Margin value = Emission Level - Limit value

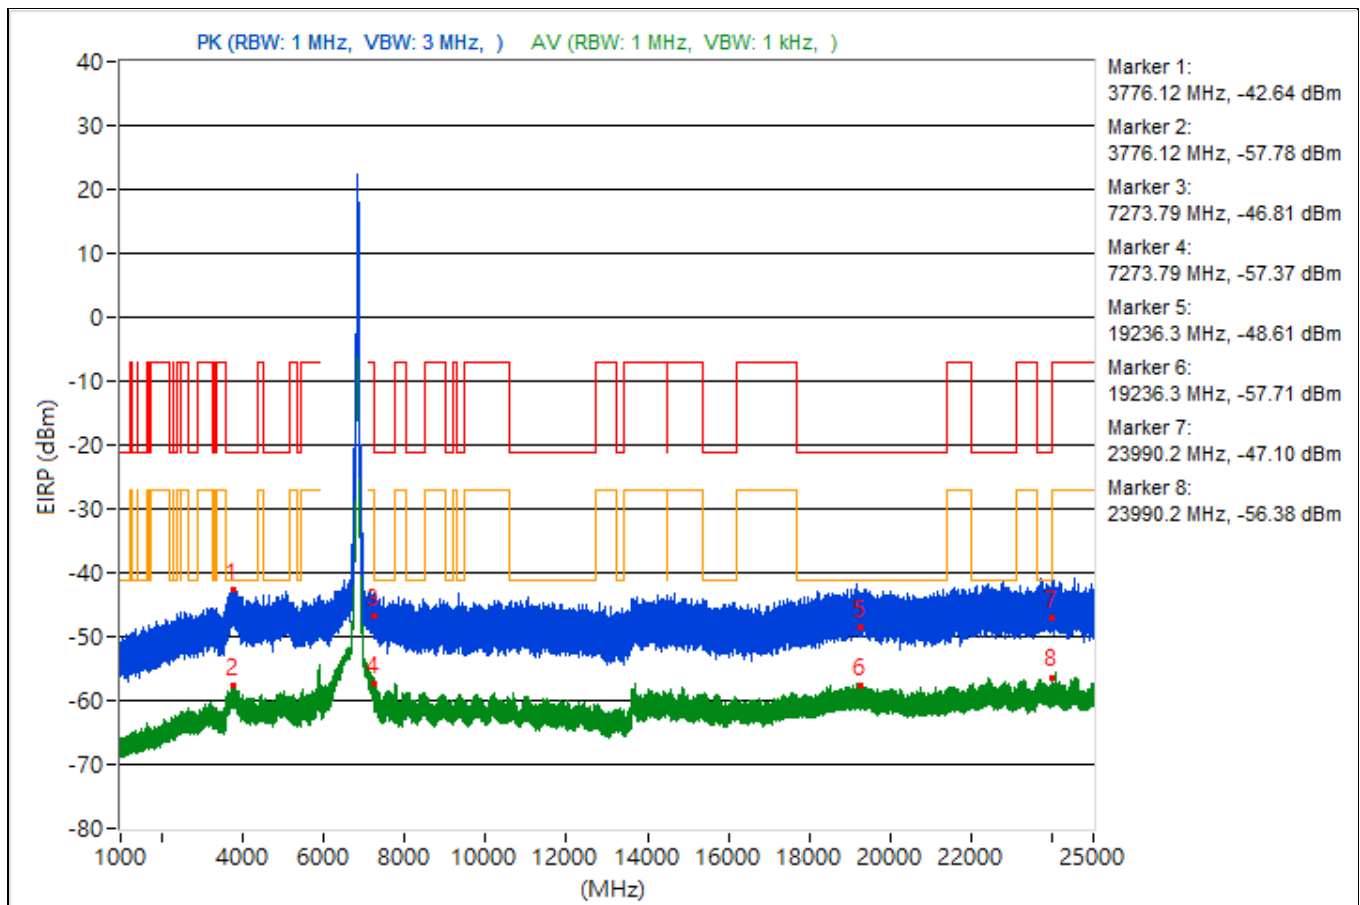

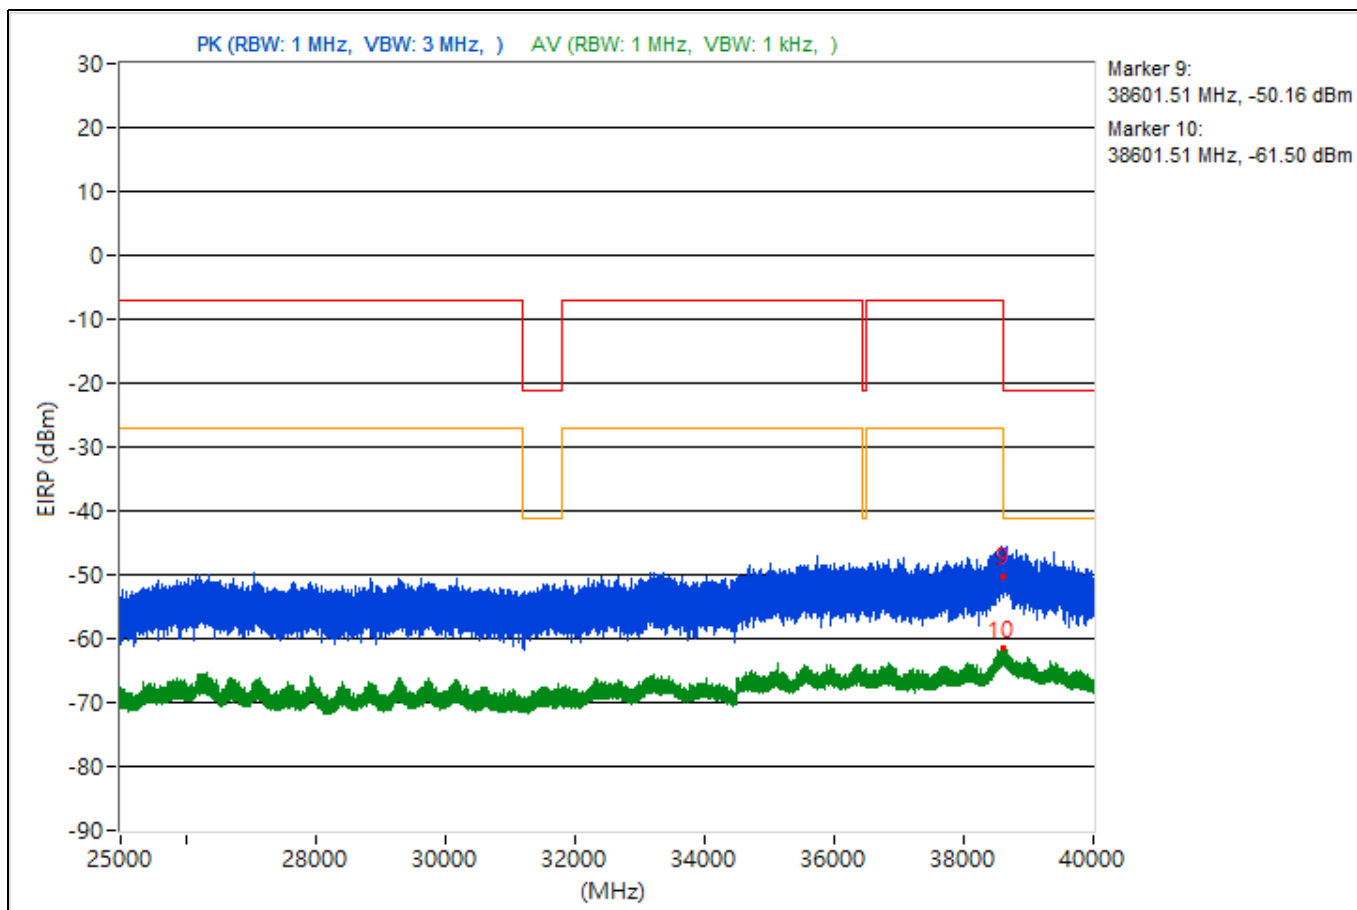



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5872.54	63.76 PK	88.26	-24.5	-38.58	-40.47	4.92	-31.5
2	#5872.54	55.49 AV	68.26	-12.77	-46.95	-48.6	4.92	-39.77
3	7648.52	48.5 PK	74	-25.5	-56.63	-53.35	4.92	-46.76
4	7648.52	36.04 AV	54	-17.96	-68.86	-65.93	4.92	-59.22
5	19139.3	49.05 PK	74	-24.95	-55.9	-52.89	4.92	-46.21
6	19139.3	37.06 AV	54	-16.94	-68.87	-64.47	4.92	-58.2
7	23719.4	49.71 PK	74	-24.29	-51.66	-56.66	4.92	-45.55
8	23719.4	38.38 AV	54	-15.62	-63.06	-67.79	4.92	-56.88
9	38600.62	45.39 PK	74	-28.61	-60.07	-56.32	4.92	-49.87
10	38600.62	33.86 AV	54	-20.14	-68.03	-71.2	4.92	-61.4

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

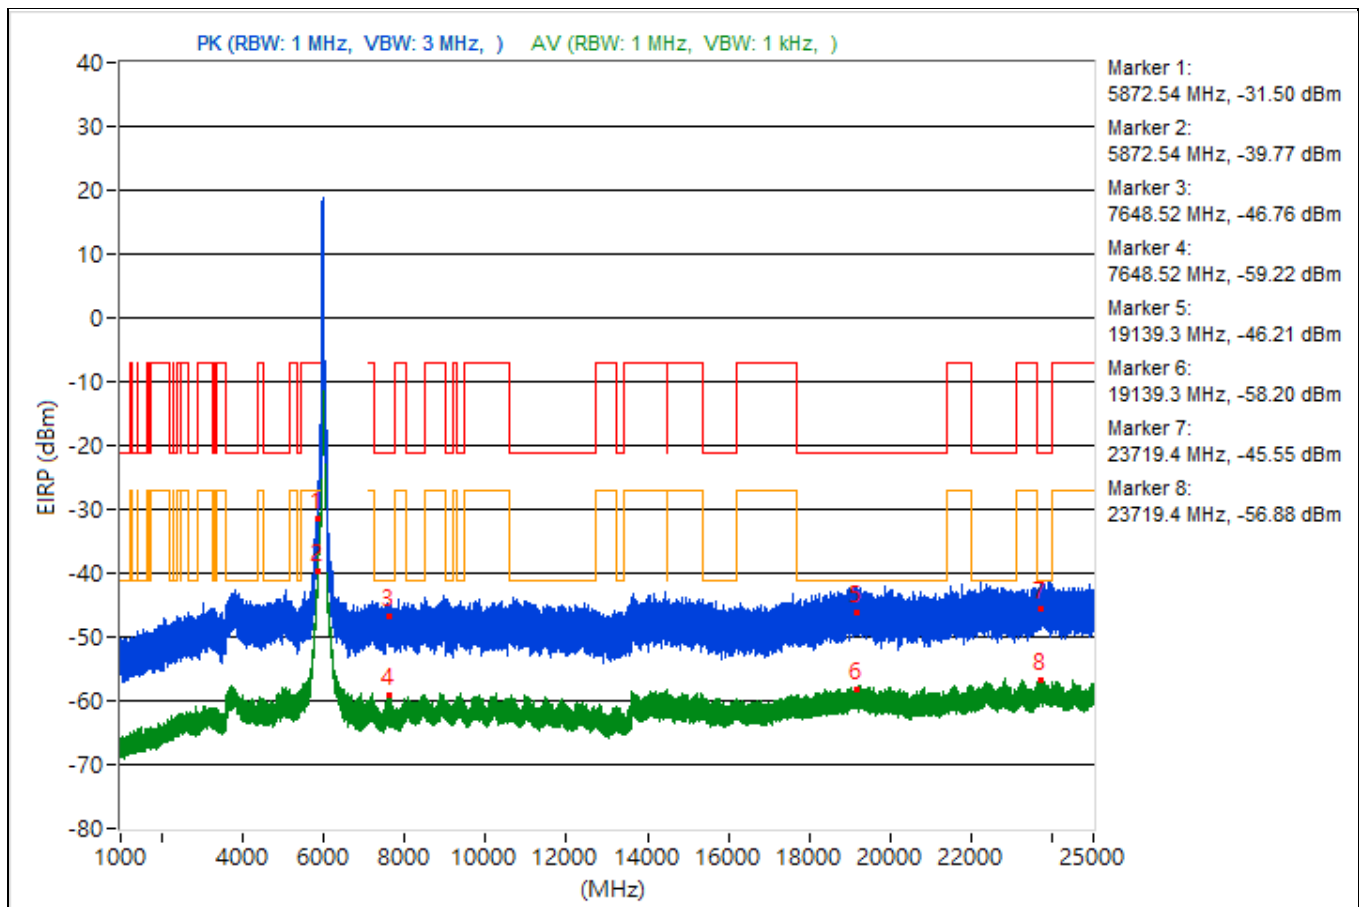


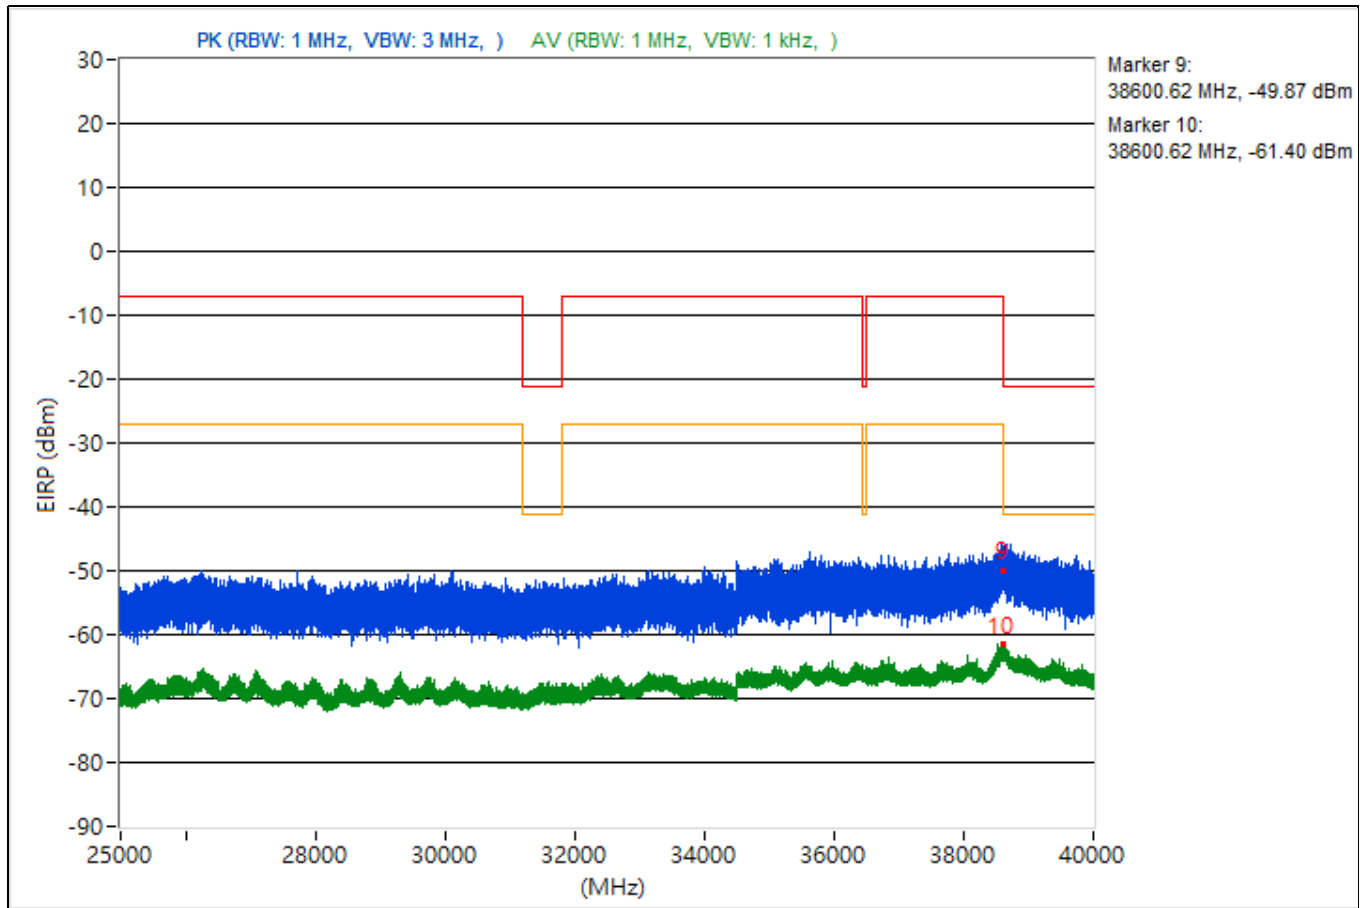


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3759.4	49.19 PK	74	-24.81	-54.05	-53.95	4.92	-46.07
2	3759.4	37.43 AV	54	-16.57	-67.52	-64.52	4.92	-57.83
3	14482.49	48.09 PK	74	-25.91	-55.15	-55.04	4.92	-47.17
4	14482.49	36.43 AV	54	-17.57	-65.46	-68.61	4.92	-58.83
5	18572.7	48.41 PK	74	-25.59	-53.94	-55.81	4.92	-46.85
6	18572.7	37.43 AV	54	-16.57	-68.01	-64.28	4.92	-57.83
7	23616.5	50.26 PK	74	-23.74	-56.16	-51.1	4.92	-45
8	23616.5	38.82 AV	54	-15.18	-63.37	-65.67	4.92	-56.44
9	38687.73	44.39 PK	74	-29.61	-59.51	-58.2	4.92	-50.87
10	38687.73	33.39 AV	54	-20.61	-68.71	-71.26	4.92	-61.87

Note: Margin value = Emission Level - Limit value

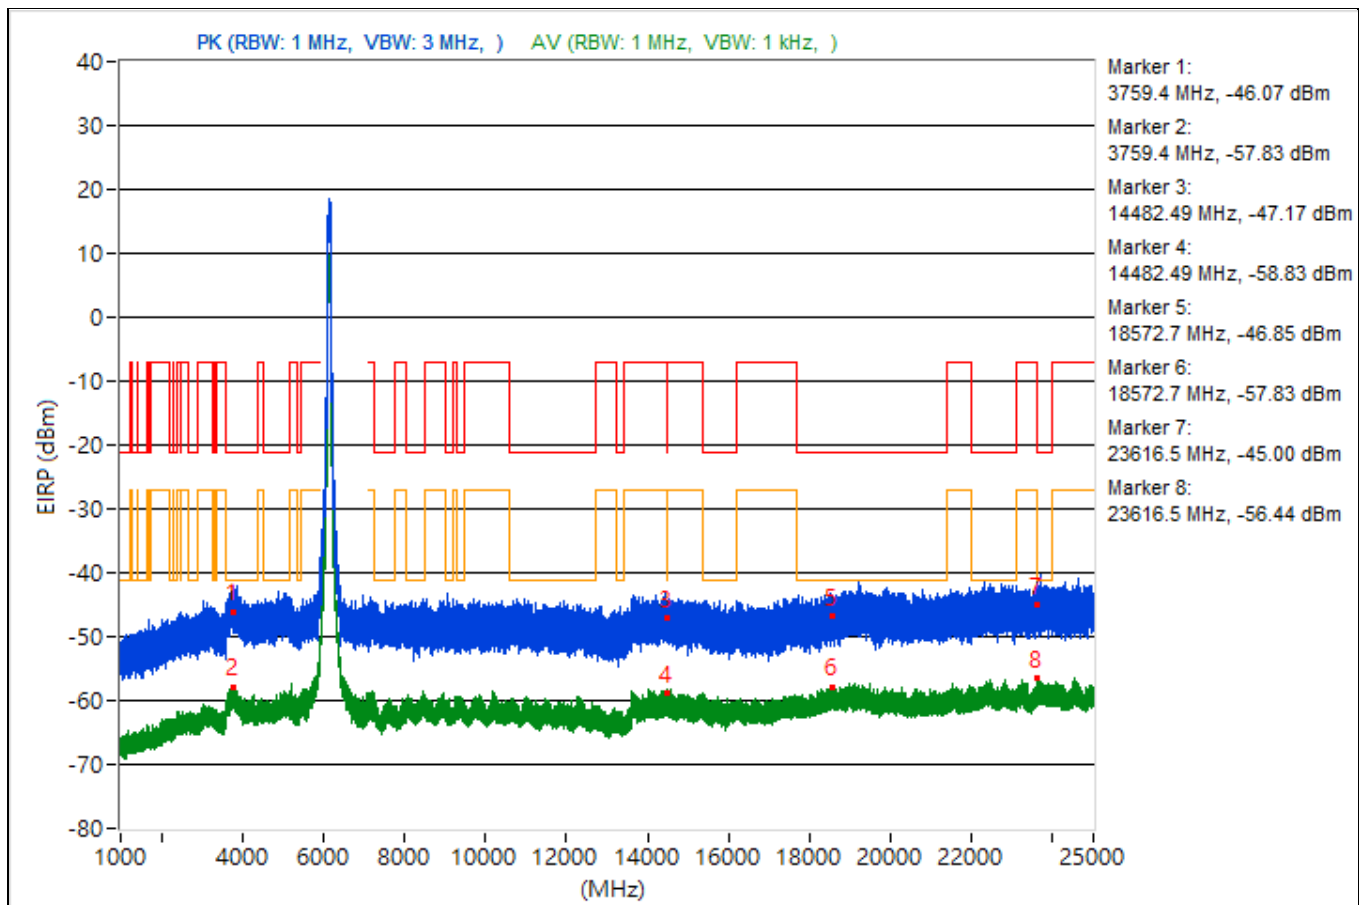


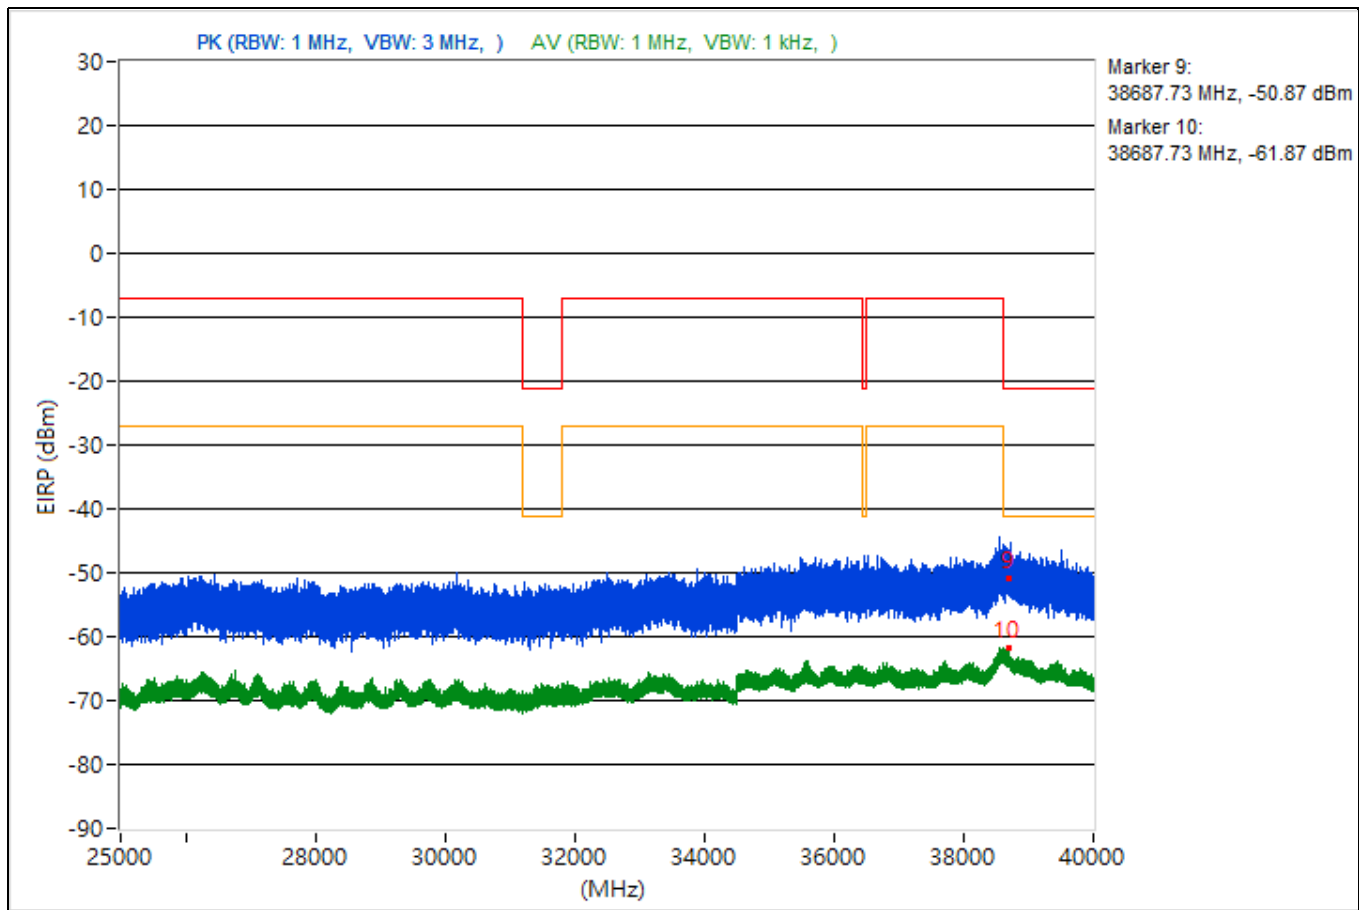


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.31	47.98 PK	74	-26.02	-55.35	-55.08	4.92	-47.28
2	5459.31	38.14 AV	54	-15.86	-64.54	-65.63	4.92	-57.12
3	14473.16	49.48 PK	74	-24.52	-56.04	-52.21	4.92	-45.78
4	14473.16	36.34 AV	54	-17.66	-68.74	-65.53	4.92	-58.92
5	19077.2	50.94 PK	74	-23.06	-50.36	-55.65	4.92	-44.32
6	19077.2	37.29 AV	54	-16.71	-67.76	-64.6	4.92	-57.97
7	23741.7	49.41 PK	74	-24.59	-56.65	-52.07	4.92	-45.85
8	23741.7	38.21 AV	54	-15.79	-63.19	-68.06	4.92	-57.05
9	38607.29	44.88 PK	74	-29.12	-59.09	-57.65	4.92	-50.38
10	38607.29	34.5 AV	54	-19.5	-70.31	-67.51	4.92	-60.76

Note: Margin value = Emission Level - Limit value

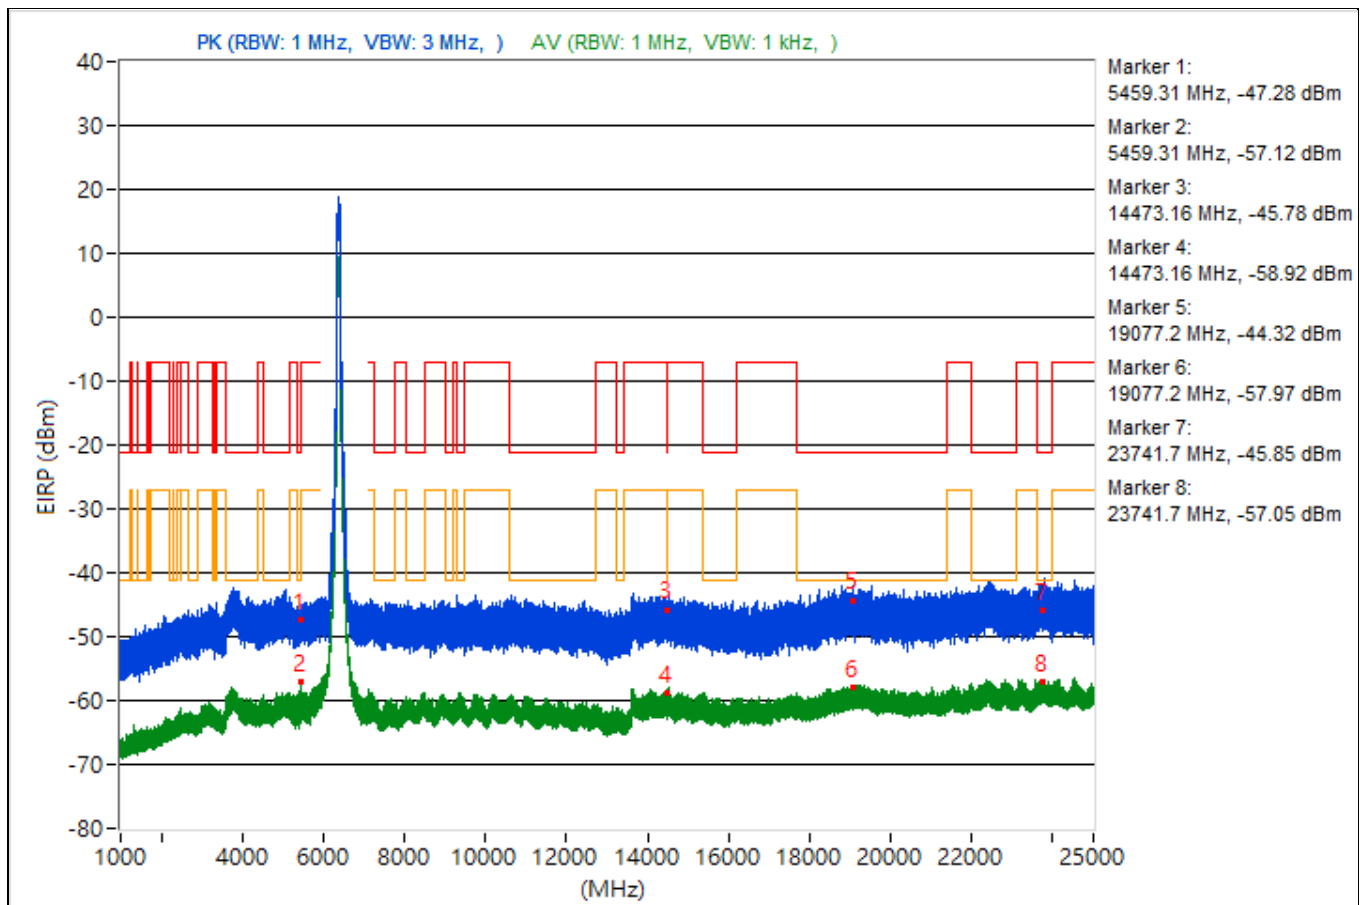


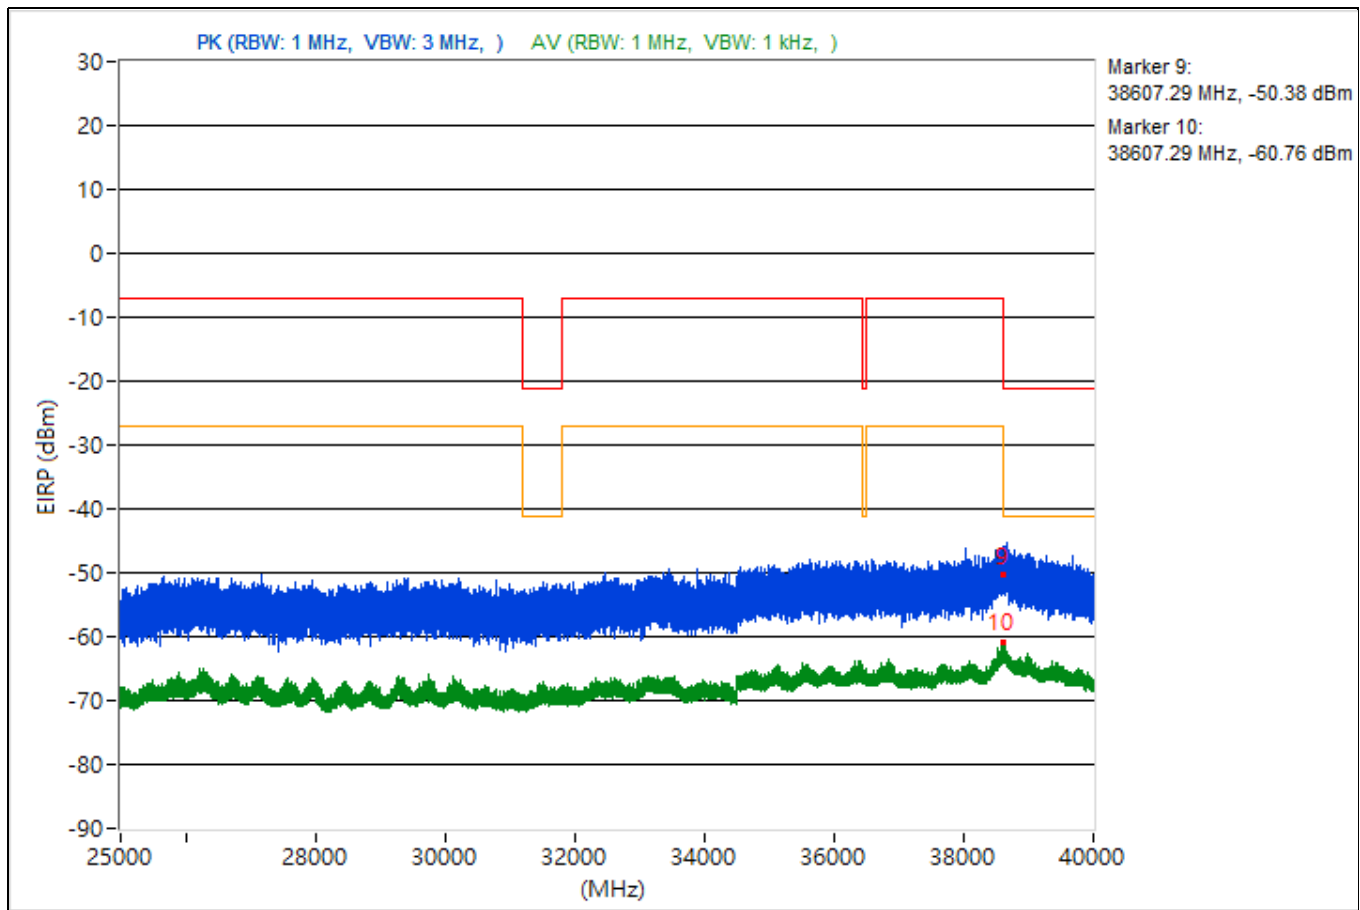


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3741.43	51.86 PK	74	-22.14	-52.89	-50.18	4.92	-43.4
2	3741.43	37.21 AV	54	-16.79	-68.78	-64.3	4.92	-58.05
3	14473.78	45.94 PK	74	-28.06	-57.46	-57.04	4.92	-49.32
4	14473.78	36.65 AV	54	-17.35	-65.43	-68.06	4.92	-58.61
5	19091.3	48.26 PK	74	-25.74	-56.53	-53.77	4.92	-47
6	19091.3	37.52 AV	54	-16.48	-64.35	-67.58	4.92	-57.74
7	23631.2	49.17 PK	74	-24.83	-53.17	-55.08	4.92	-46.09
8	23631.2	39.02 AV	54	-14.98	-63.07	-65.64	4.92	-56.24
9	38606.04	43.51 PK	74	-30.49	-62.78	-57.89	4.92	-51.75
10	38606.04	34.08 AV	54	-19.92	-68.26	-70.18	4.92	-61.18

Note: Margin value = Emission Level - Limit value

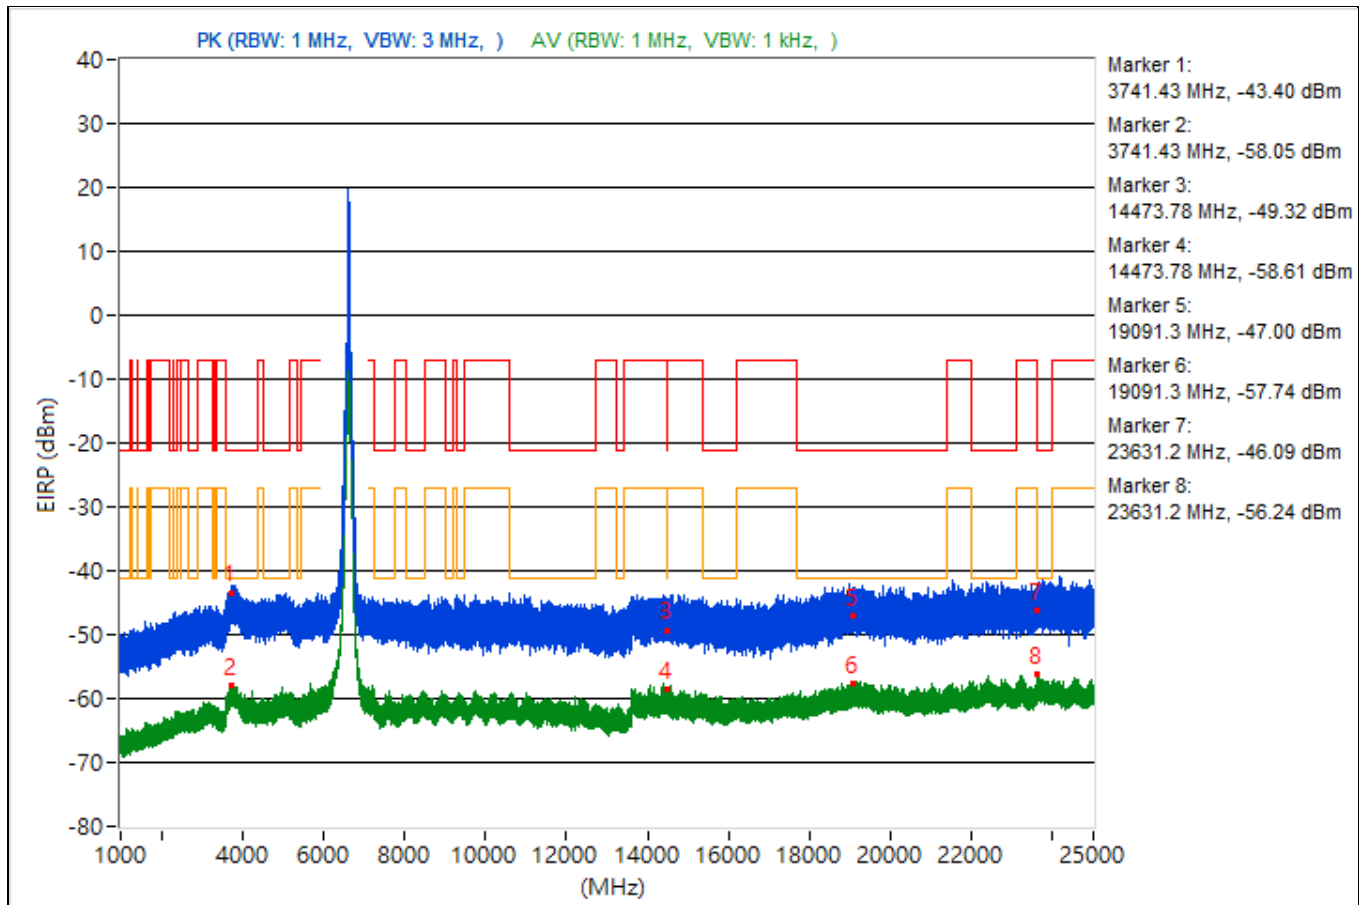


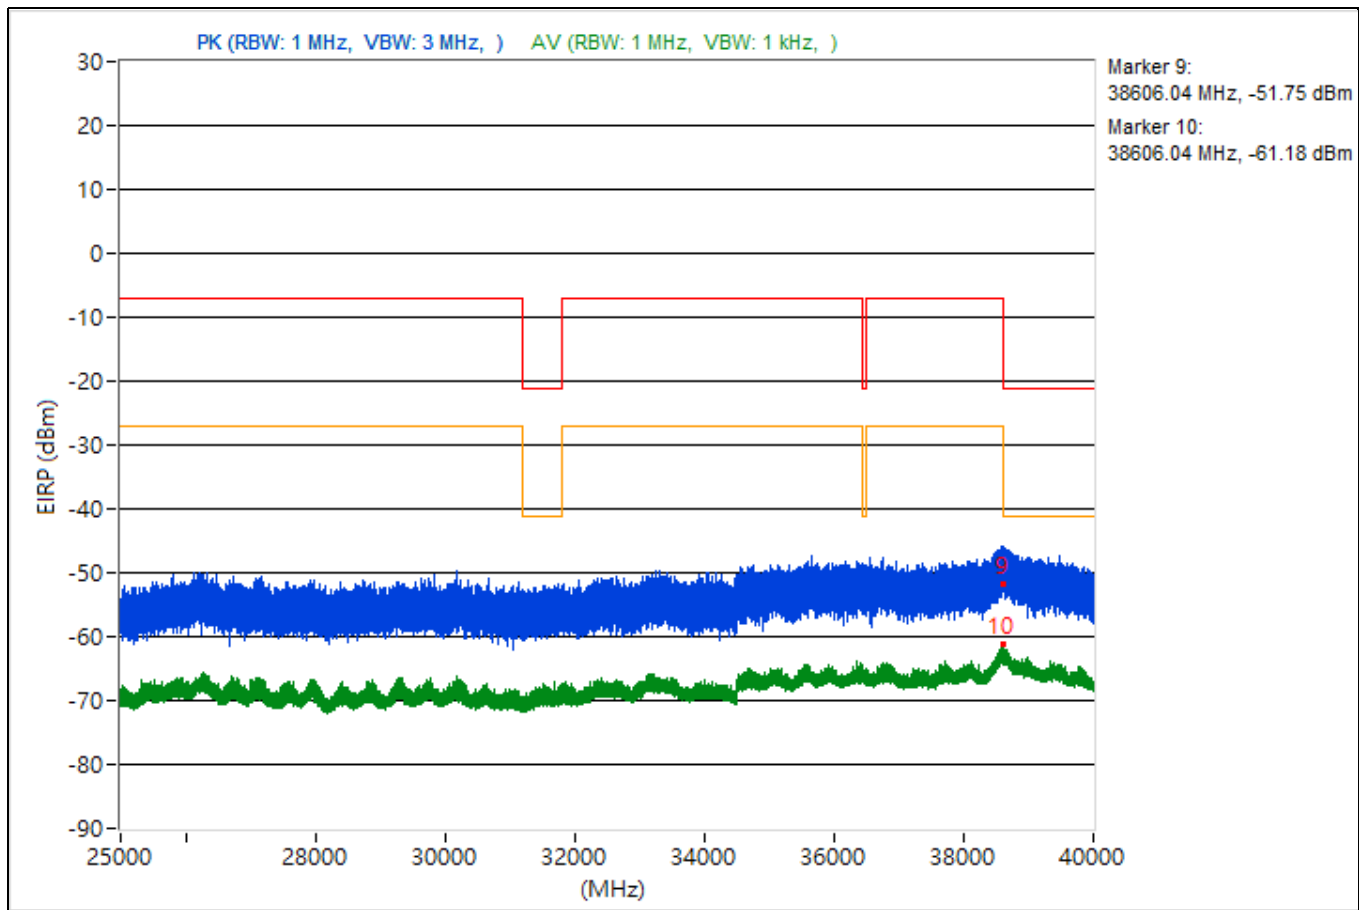


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.14	51.12 PK	74	-22.88	-50.86	-53.75	4.92	-44.14
2	3785.14	36.82 AV	54	-17.18	-64.84	-68.74	4.92	-58.44
3	15358.04	46.53 PK	74	-27.47	-56.95	-56.4	4.92	-48.73
4	15358.04	36.46 AV	54	-17.54	-68.85	-65.32	4.92	-58.8
5	19253.2	51.49 PK	74	-22.51	-52.05	-51.37	4.92	-43.77
6	19253.2	37.4 AV	54	-16.6	-64.29	-68.09	4.92	-57.86
7	23664.1	48.54 PK	74	-25.46	-54.04	-55.37	4.92	-46.72
8	23664.1	38.49 AV	54	-15.51	-67.01	-63.21	4.92	-56.77
9	38645.69	47.57 PK	74	-26.43	-54.18	-57.81	4.92	-47.69
10	38645.69	33.4 AV	54	-20.6	-68.61	-71.42	4.92	-61.86

Note: Margin value = Emission Level - Limit value

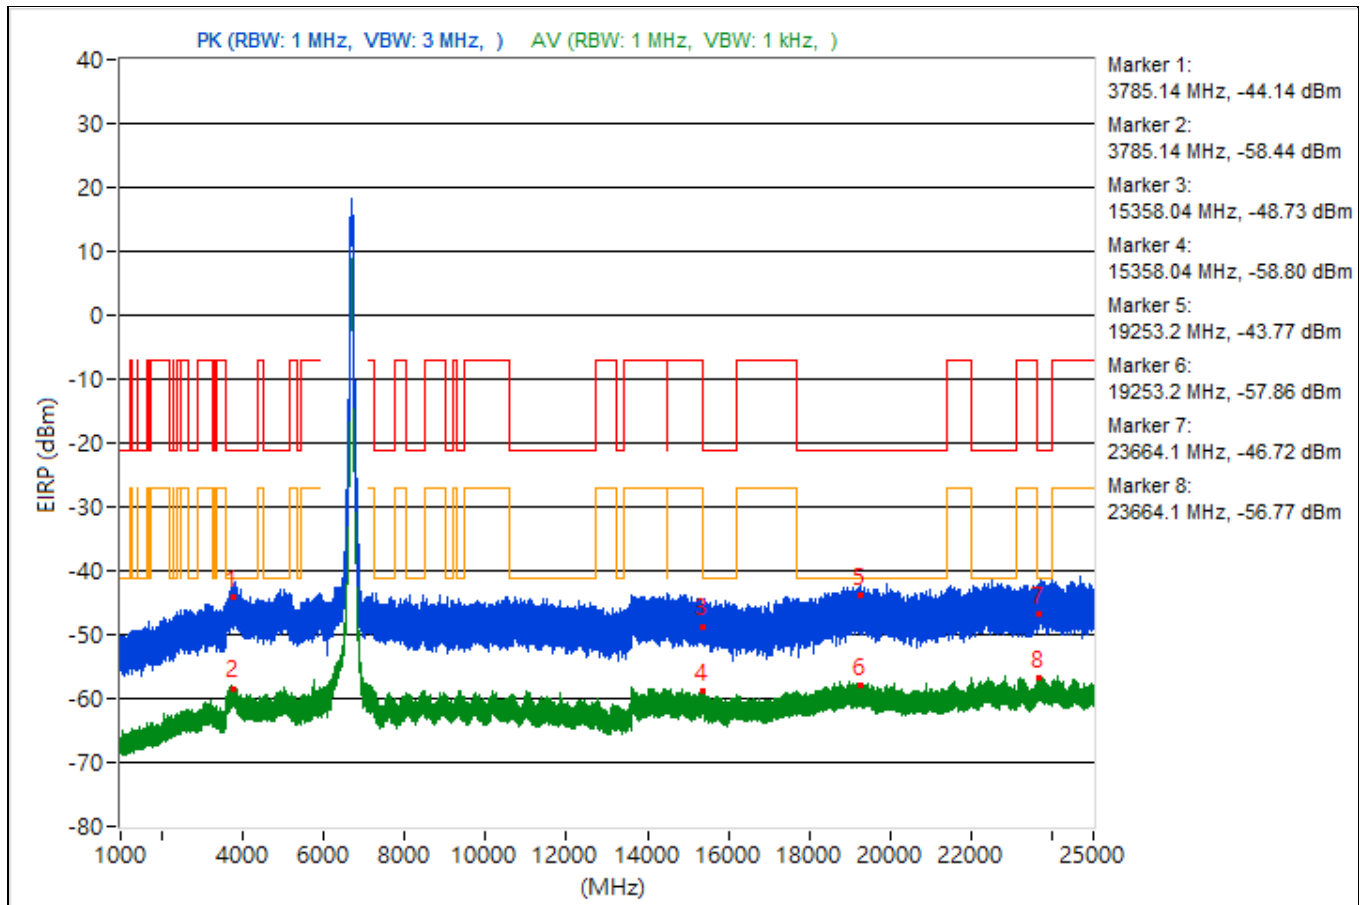


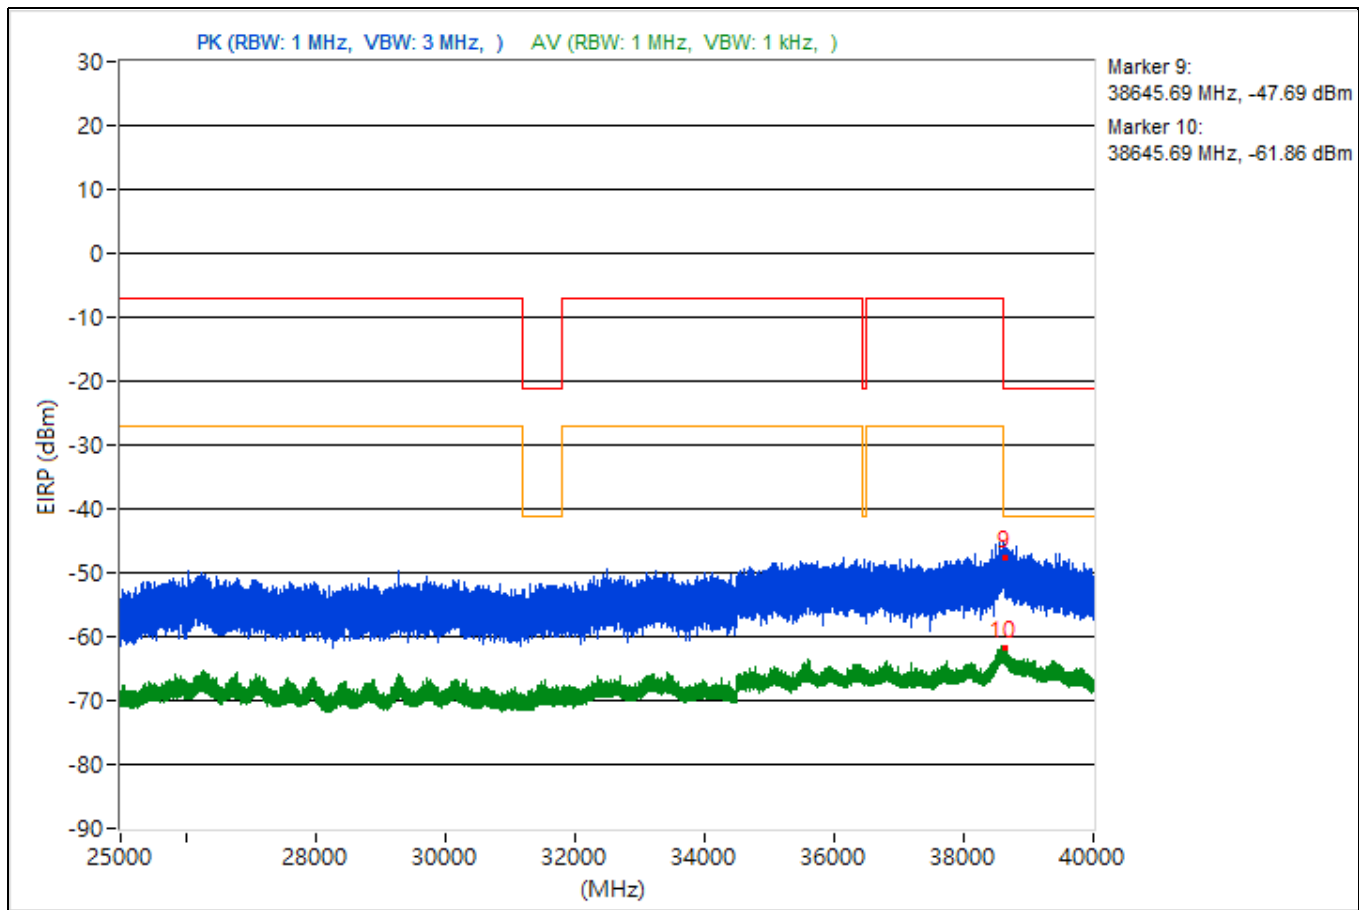


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.89	50.85 PK	74	-23.15	-51.54	-53.32	4.92	-44.41
2	3775.89	38.26 AV	54	-15.74	-65.87	-64.16	4.92	-57
3	7262.04	45.8 PK	74	-28.2	-58.07	-56.8	4.92	-49.46
4	7262.04	36.73 AV	54	-17.27	-65.54	-67.64	4.92	-58.53
5	19098	49.28 PK	74	-24.72	-52.85	-55.33	4.92	-45.98
6	19098	37.54 AV	54	-16.46	-67.58	-64.32	4.92	-57.72
7	23642.3	51.19 PK	74	-22.81	-51.06	-53.19	4.92	-44.07
8	23642.3	38.92 AV	54	-15.08	-63.7	-64.92	4.92	-56.34
9	38691.82	44.85 PK	74	-29.15	-56.92	-60.48	4.92	-50.41
10	38691.82	33.52 AV	54	-20.48	-71.49	-68.39	4.92	-61.74

Note: Margin value = Emission Level - Limit value

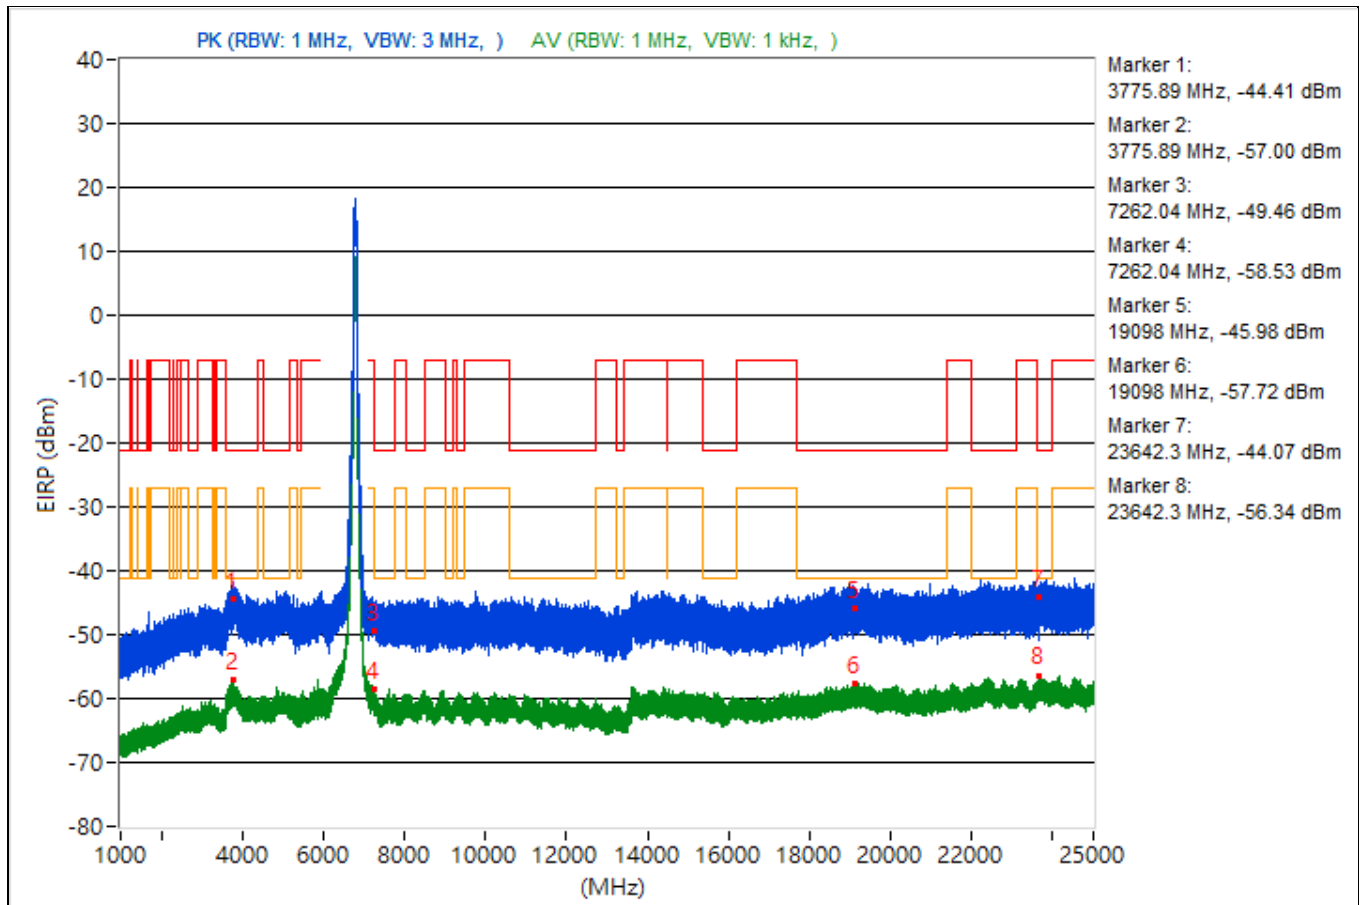

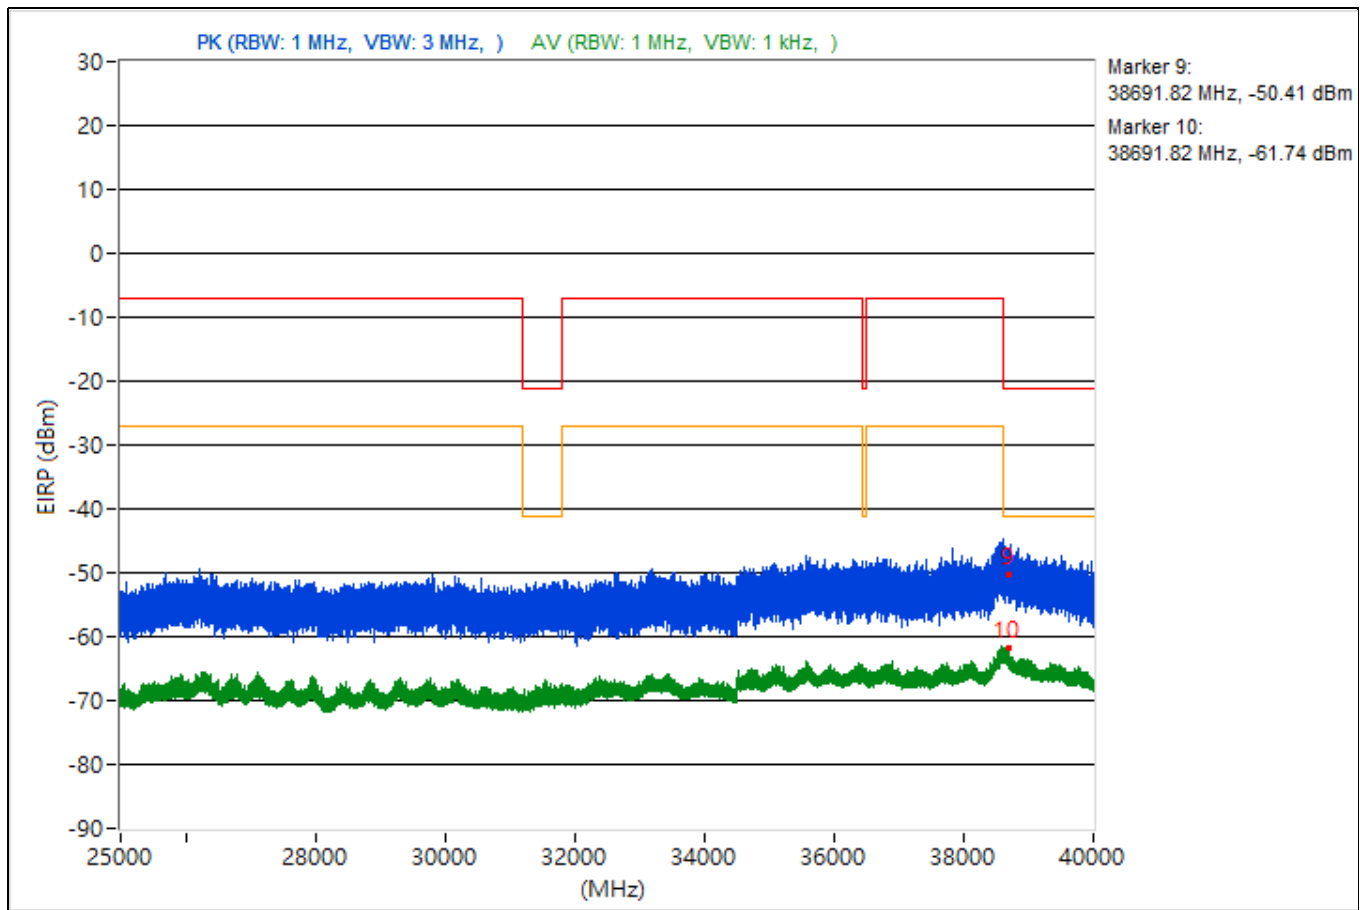



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5872.54	74.87 PK	88.26	-13.39	-28.18	-28.48	4.92	-20.39
2	#5872.54	67.46 AV	68.26	-0.8	-36.39	-35.16	4.92	-27.8
3	15386.76	47.7 PK	74	-26.3	-56.33	-54.79	4.92	-47.56
4	15386.76	36.06 AV	54	-17.94	-66.09	-68.49	4.92	-59.2
5	19474.3	48.38 PK	74	-25.62	-55.46	-54.24	4.92	-46.88
6	19474.3	37.01 AV	54	-16.99	-64.5	-68.97	4.92	-58.25
7	22399.3	50.96 PK	74	-23.04	-53.96	-51	4.92	-44.3
8	22399.3	39.11 AV	54	-14.89	-63.34	-64.98	4.92	-56.15
9	38652.18	44.18 PK	74	-29.82	-57.98	-60.37	4.92	-51.08
10	38652.18	33.46 AV	54	-20.54	-71.53	-68.46	4.92	-61.8

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

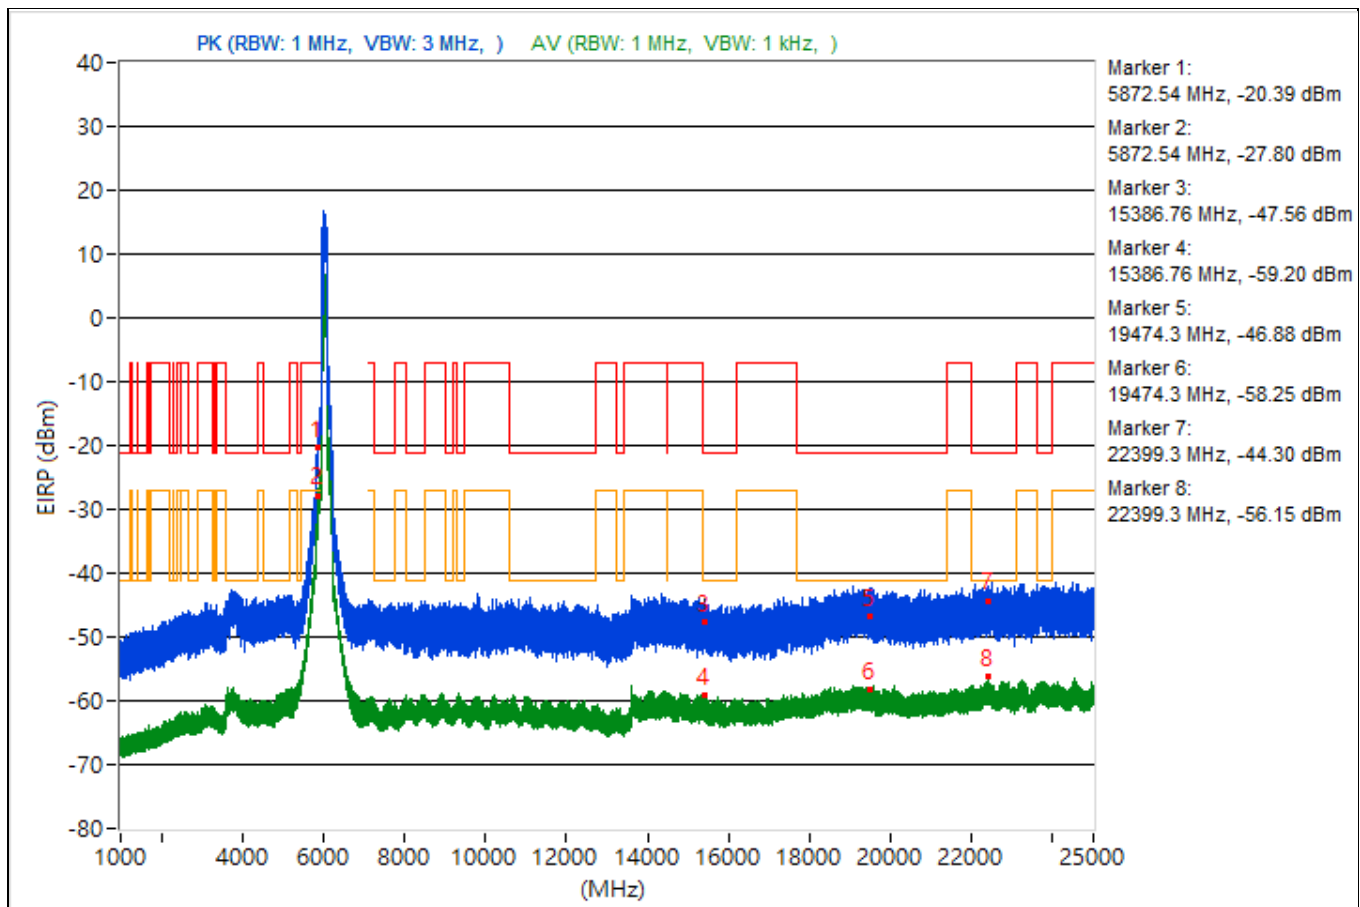


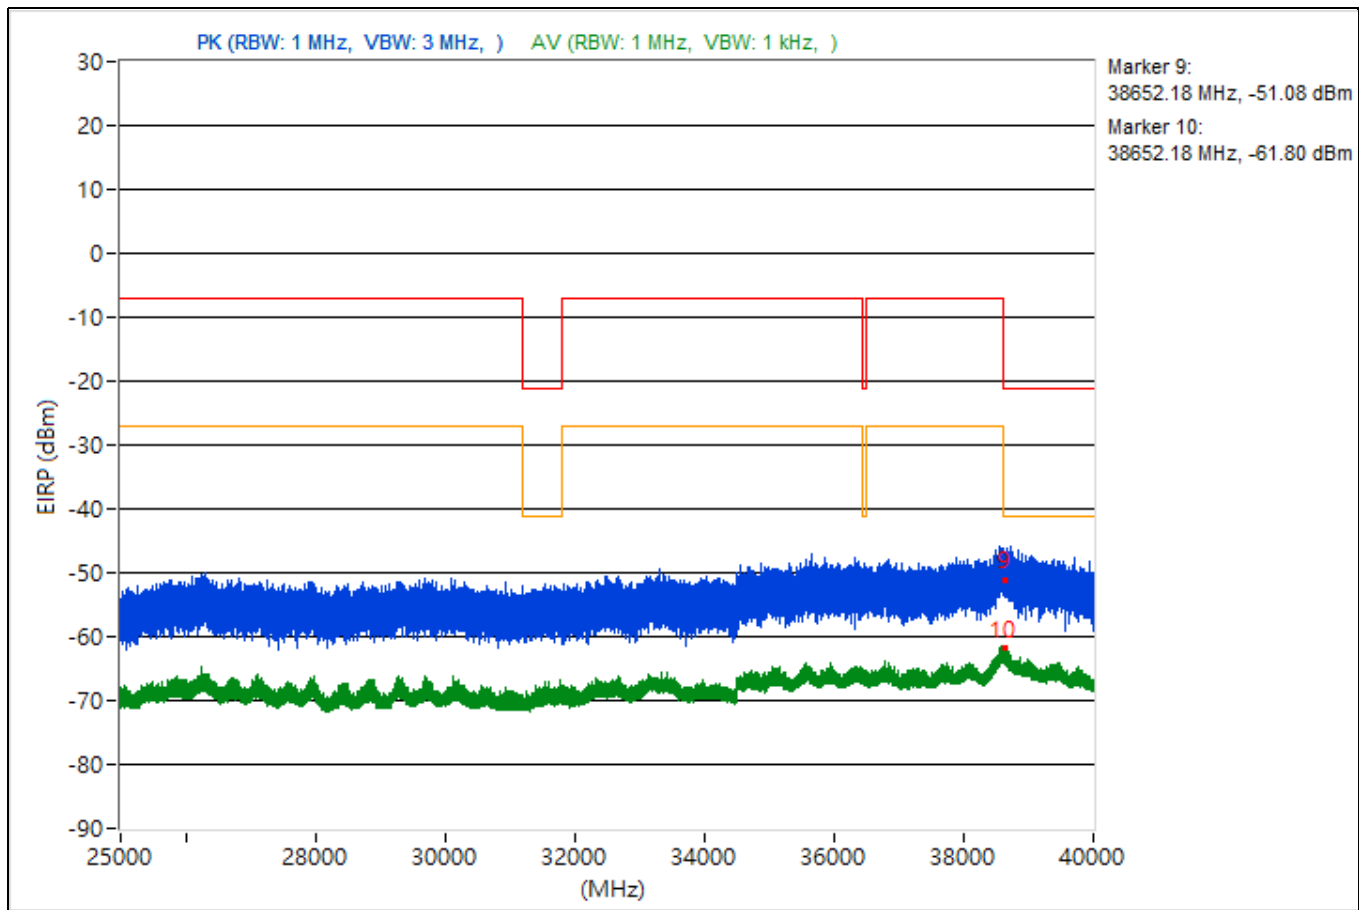


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3760.49	49.5 PK	74	-24.5	-54.28	-53.17	4.92	-45.76
2	3760.49	36.97 AV	54	-17.03	-68.51	-64.72	4.92	-58.29
3	14480.98	45.66 PK	74	-28.34	-58.27	-56.89	4.92	-49.6
4	14480.98	35.79 AV	54	-18.21	-65.68	-70.27	4.92	-59.47
5	21033.5	48.18 PK	74	-25.82	-53.71	-56.88	4.92	-47.08
6	21033.5	37.25 AV	54	-16.75	-68.36	-64.4	4.92	-58.01
7	22428.6	50.62 PK	74	-23.38	-52.63	-52.5	4.92	-44.64
8	22428.6	38.06 AV	54	-15.94	-63.33	-68.25	4.92	-57.2
9	38614.4	44.58 PK	74	-29.42	-60.03	-57.54	4.92	-50.68
10	38614.4	33.77 AV	54	-20.23	-71.35	-68.08	4.92	-61.49

Note: Margin value = Emission Level - Limit value

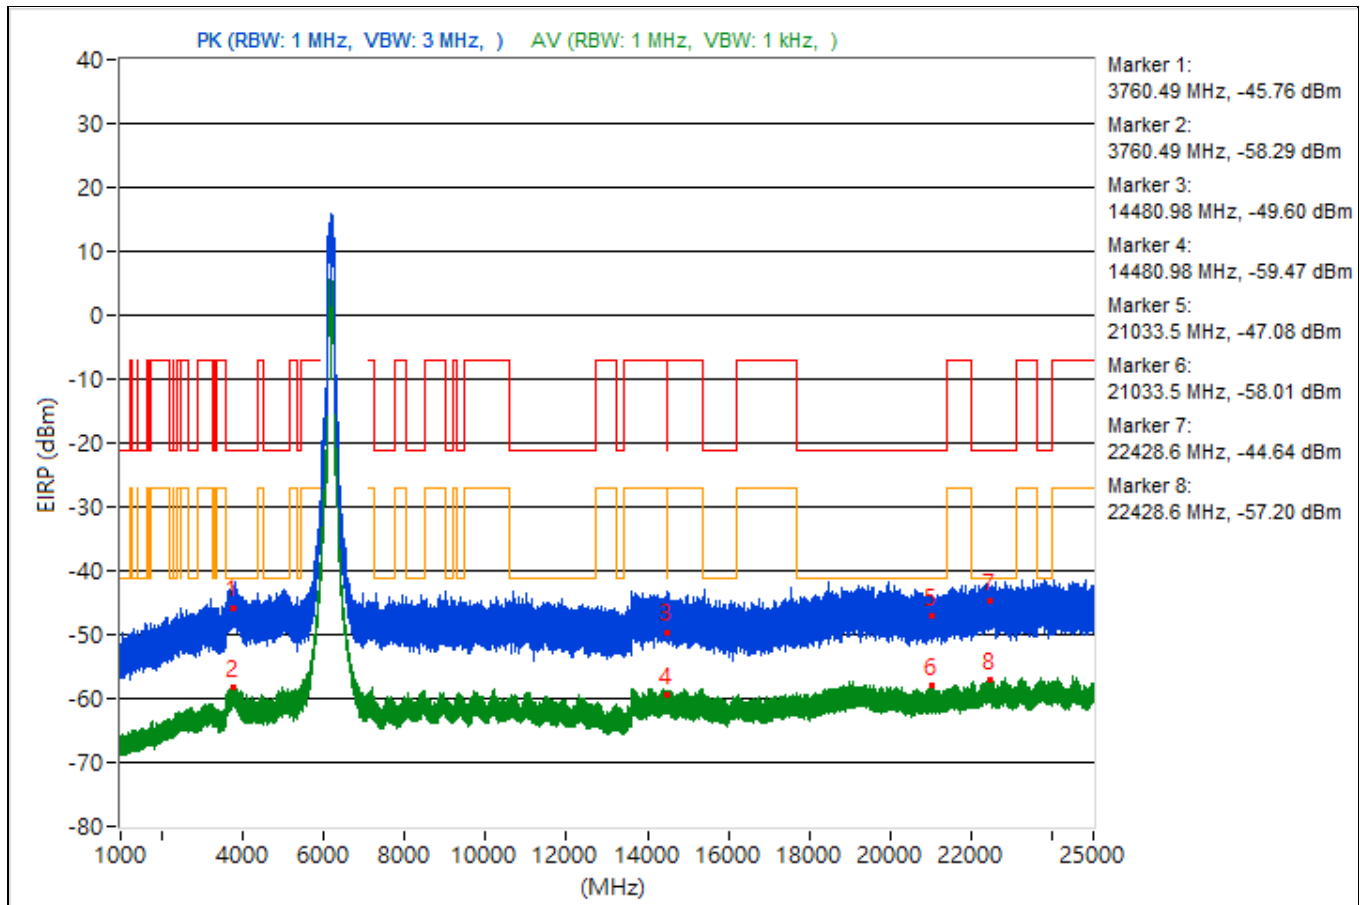


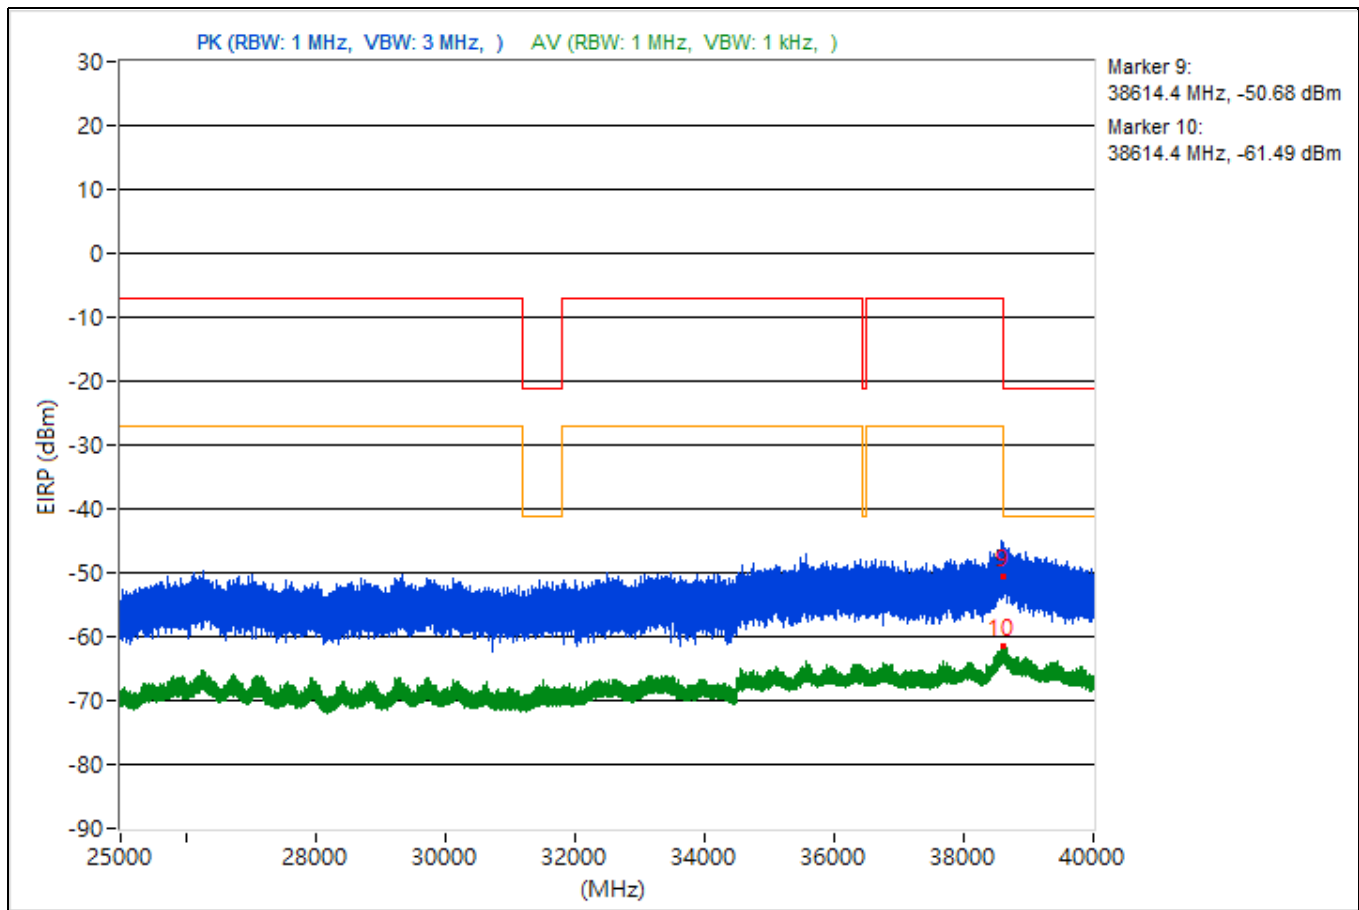


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.6	50.9 PK	74	-23.1	-51.93	-52.69	4.92	-44.36
2	3777.6	38.62 AV	54	-15.38	-66.62	-63.18	4.92	-56.64
3	14485.69	48.91 PK	74	-25.09	-54.91	-53.73	4.92	-46.35
4	14485.69	38.18 AV	54	-15.82	-66.04	-64.18	4.92	-57.08
5	19040.2	47.82 PK	74	-26.18	-56.54	-54.46	4.92	-47.44
6	19040.2	39.06 AV	54	-14.94	-62.65	-66.39	4.92	-56.2
7	22753.2	50.03 PK	74	-23.97	-54.21	-52.32	4.92	-45.23
8	22753.2	39.98 AV	54	-14.02	-64.94	-61.97	4.92	-55.28
9	38674.93	48 PK	74	-26	-53.97	-56.9	4.92	-47.26
10	38674.93	36.8 AV	54	-17.2	-67.48	-65.52	4.92	-58.46

Note: Margin value = Emission Level - Limit value

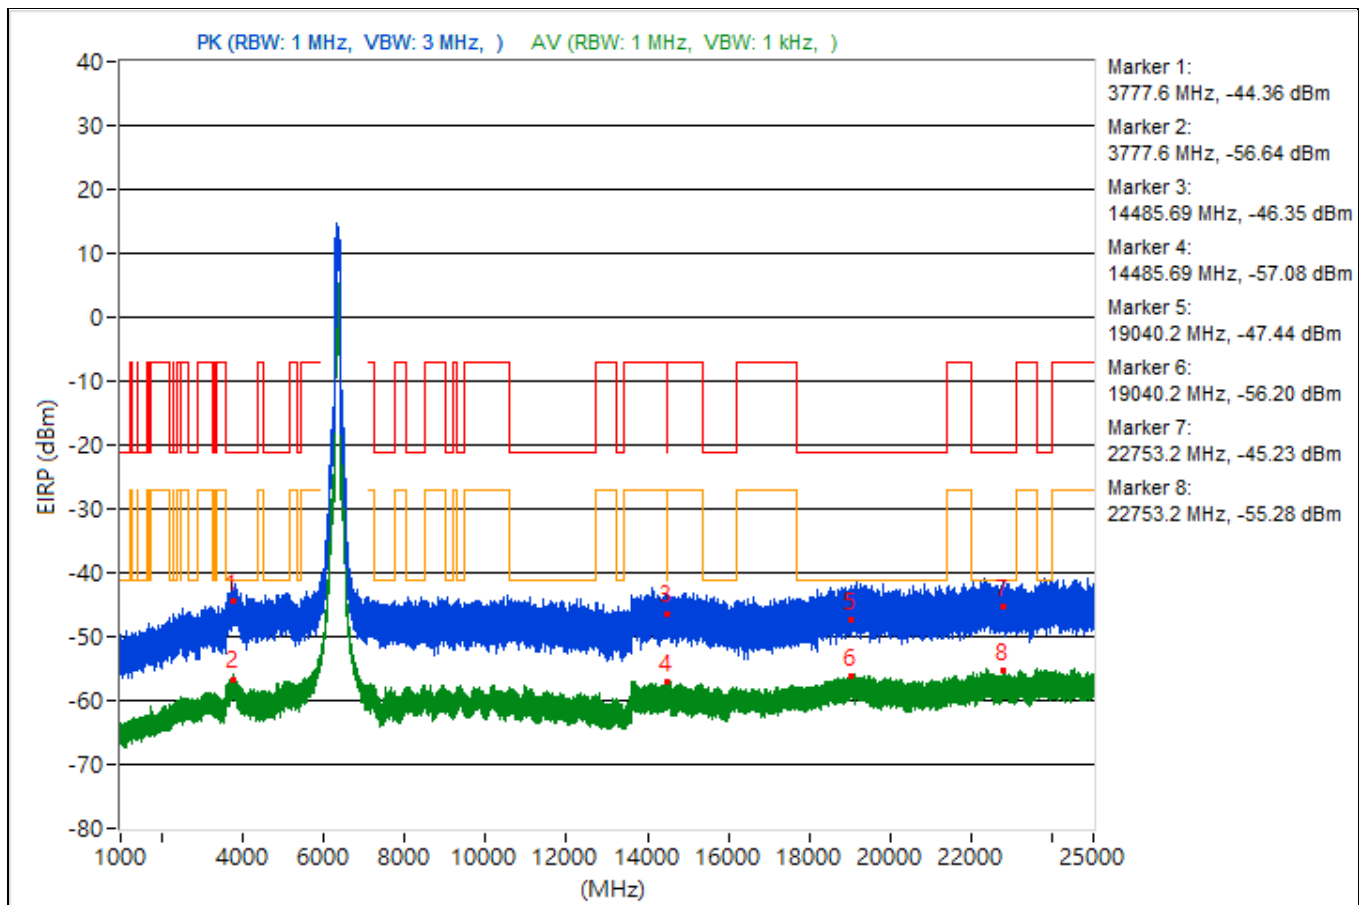


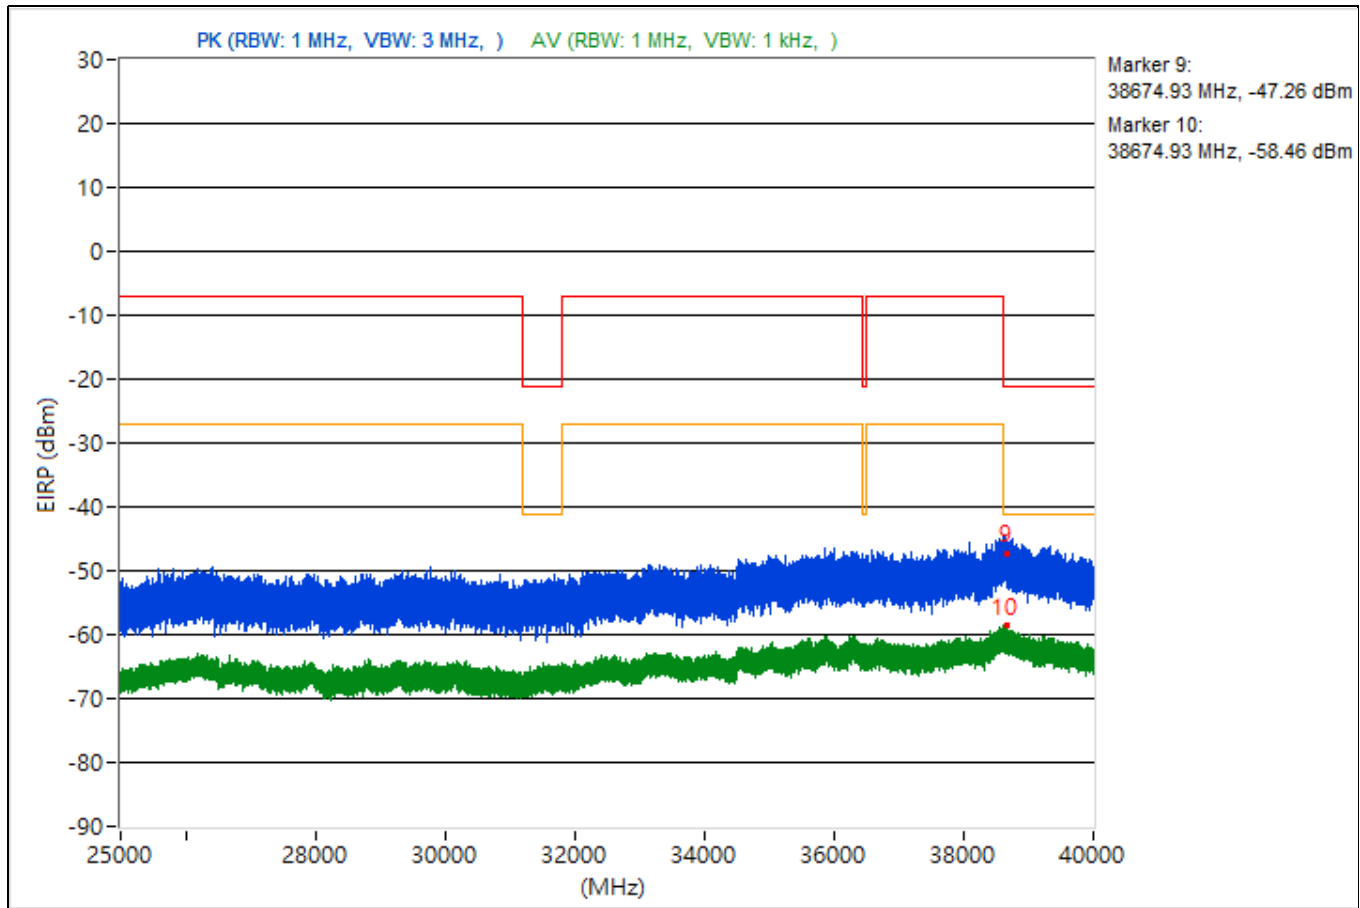


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.2	46.63 PK	74	-27.37	-57.39	-55.86	4.92	-48.63
2	3776.2	36.93 AV	54	-17.07	-68.79	-64.68	4.92	-58.33
3	14484.62	48.57 PK	74	-25.43	-55.59	-53.83	4.92	-46.69
4	14484.62	36.73 AV	54	-17.27	-65.43	-67.83	4.92	-58.53
5	19091.6	47.07 PK	74	-26.93	-56.48	-55.79	4.92	-48.19
6	19091.6	37.71 AV	54	-16.29	-66.94	-64.39	4.92	-57.55
7	22473.1	49.74 PK	74	-24.26	-56.29	-51.74	4.92	-45.52
8	22473.1	38.48 AV	54	-15.52	-66.53	-63.44	4.92	-56.78
9	38613.42	45.38 PK	74	-28.62	-57.47	-58.18	4.92	-49.88
10	38613.42	34.39 AV	54	-19.61	-69.78	-68.01	4.92	-60.87

Note: Margin value = Emission Level - Limit value

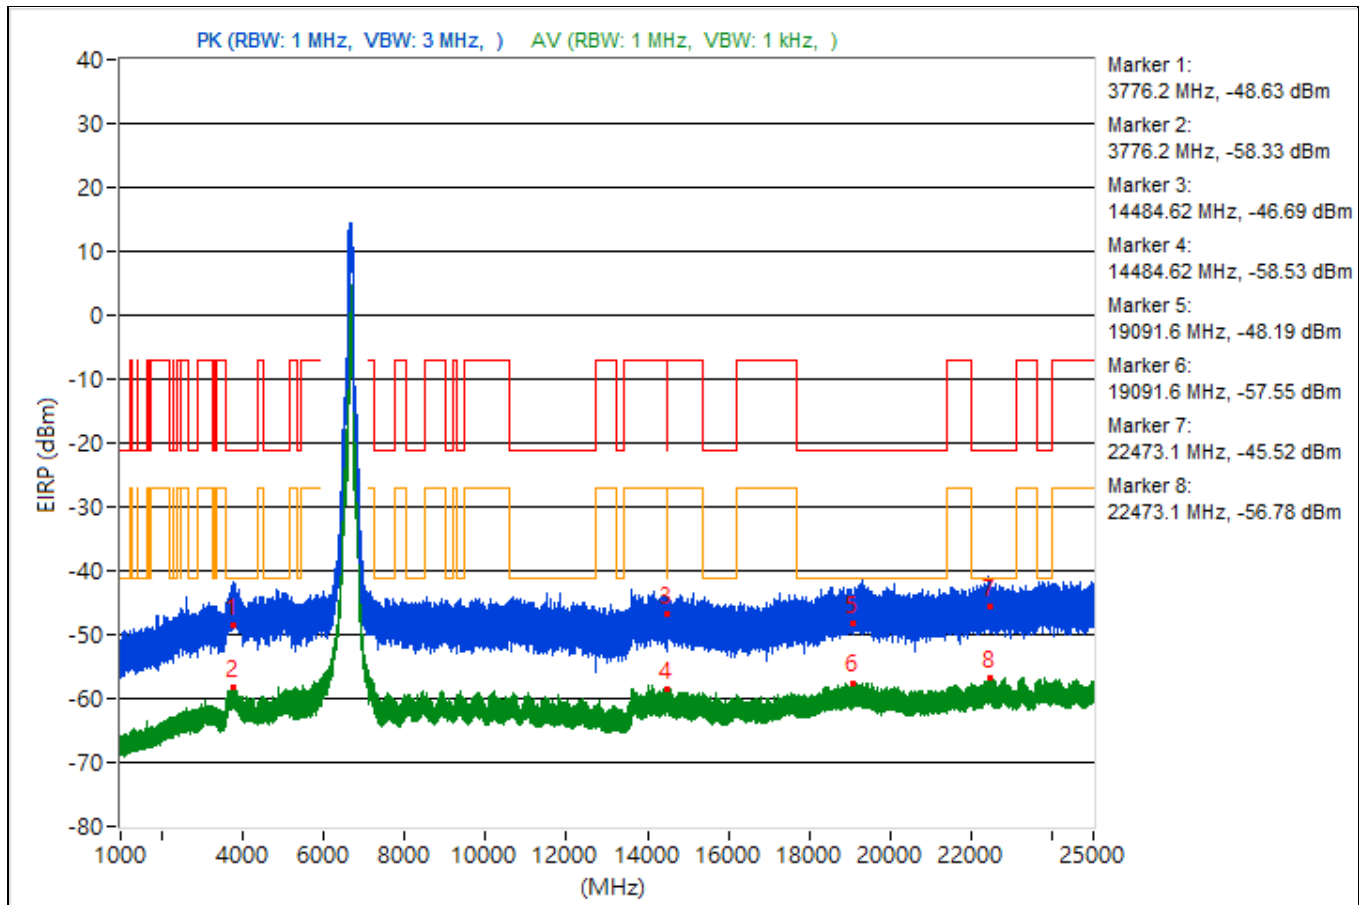


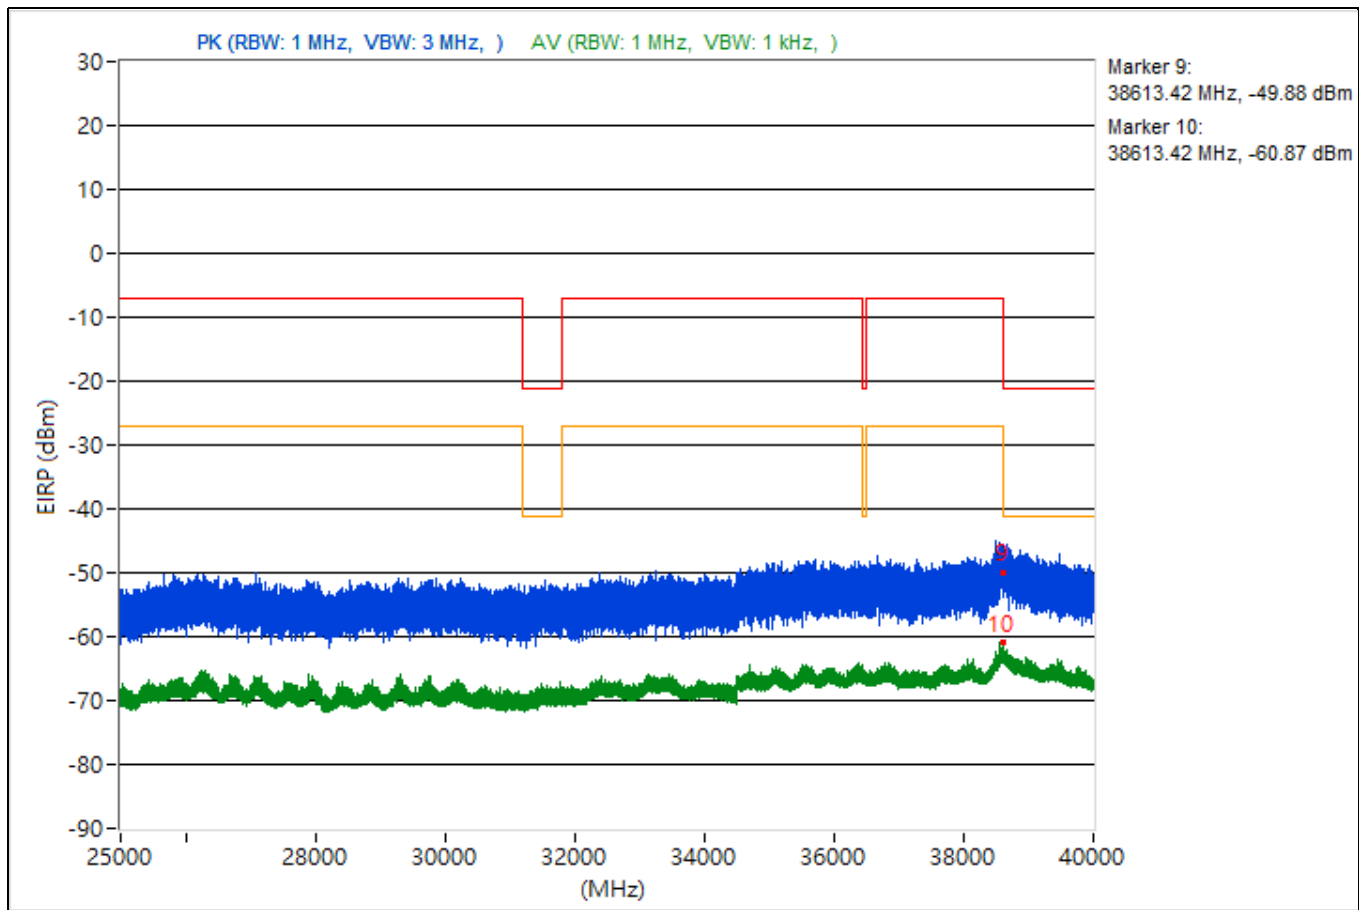


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.9	48.72 PK	74	-25.28	-57.19	-52.81	4.92	-46.54
2	3818.9	37.73 AV	54	-16.27	-67.2	-64.23	4.92	-57.53
3	9372.8	46.59 PK	74	-27.41	-56.43	-56.77	4.92	-48.67
4	9372.8	36.55 AV	54	-17.45	-65.78	-67.72	4.92	-58.71
5	19150.6	50.44 PK	74	-23.56	-51.7	-54.15	4.92	-44.82
6	19150.6	37.87 AV	54	-16.13	-64.06	-67.1	4.92	-57.39
7	22330.5	50.95 PK	74	-23.05	-52.59	-51.92	4.92	-44.31
8	22330.5	38.27 AV	54	-15.73	-67.19	-63.44	4.92	-56.99
9	38626.31	47.51 PK	74	-26.49	-56.18	-55.23	4.92	-47.75
10	38626.31	35.06 AV	54	-18.94	-67.49	-68.88	4.92	-60.2

Note: Margin value = Emission Level - Limit value

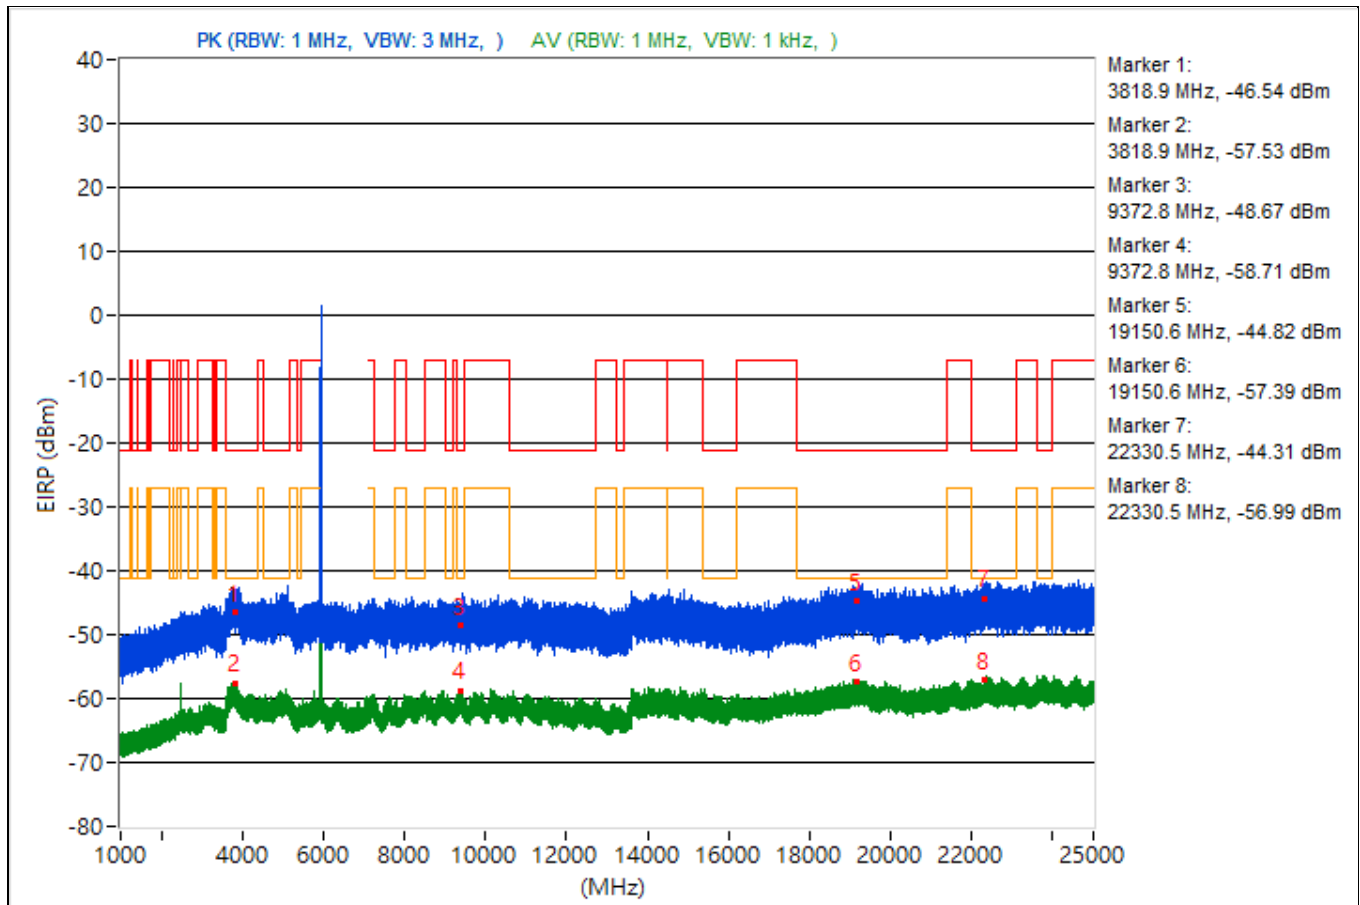


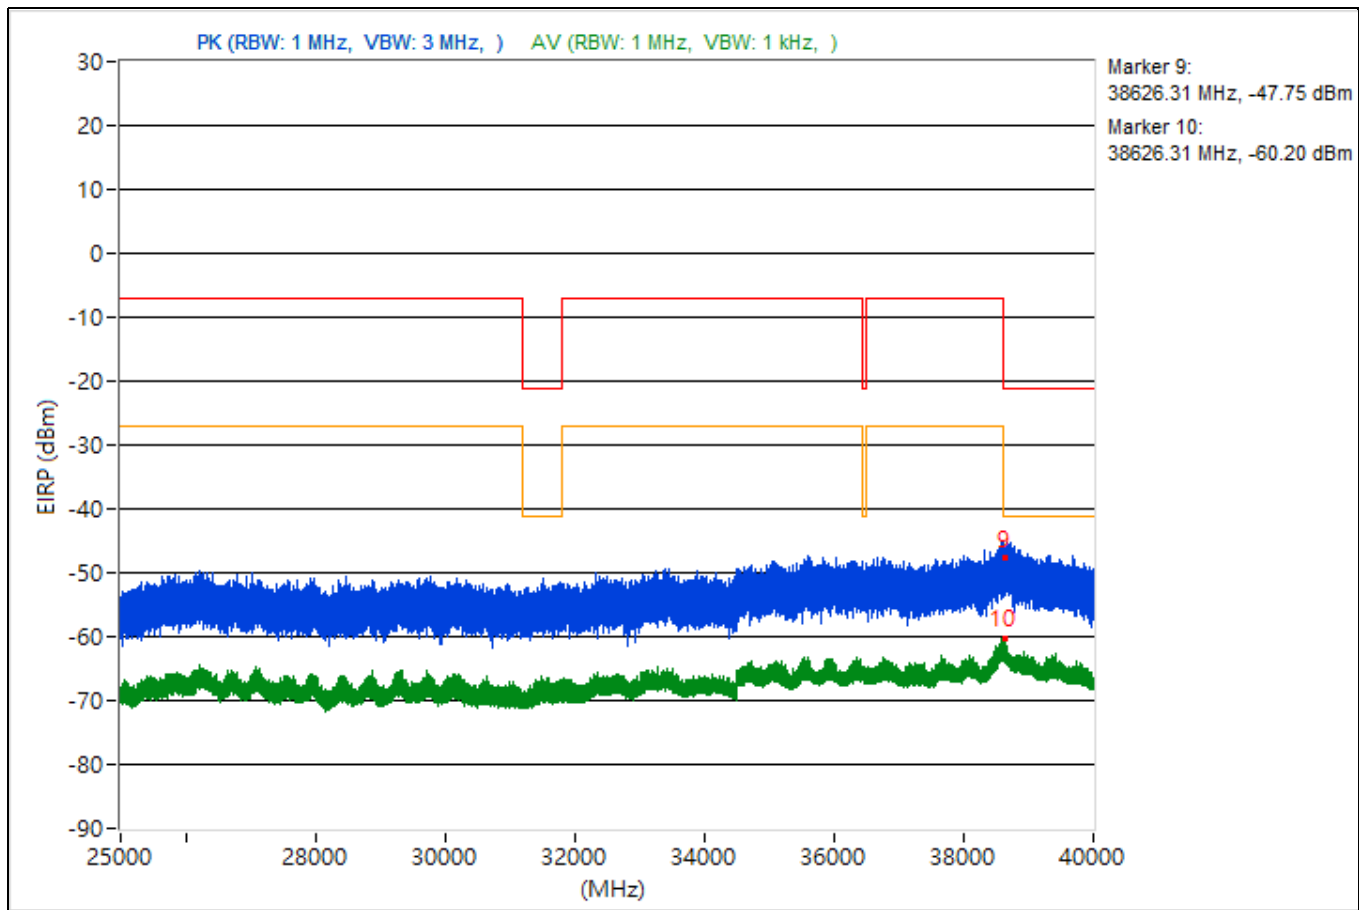


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.56	49.8 PK	74	-24.2	-53	-53.82	4.92	-45.46
2	3815.56	38.83 AV	54	-15.17	-64.02	-64.74	4.92	-56.43
3	14473.16	45.99 PK	74	-28.01	-58.02	-56.52	4.92	-49.27
4	14473.16	38.01 AV	54	-15.99	-65.21	-65.14	4.92	-57.25
5	19525.8	49.89 PK	74	-24.11	-52.18	-54.81	4.92	-45.37
6	19525.8	38.37 AV	54	-15.63	-63.64	-66.43	4.92	-56.89
7	22778.3	47.11 PK	74	-26.89	-56.4	-55.79	4.92	-48.15
8	22778.3	39.23 AV	54	-14.77	-65.41	-62.87	4.92	-56.03
9	38605.07	46.85 PK	74	-27.15	-54.54	-59.5	4.92	-48.41
10	38605.07	35.31 AV	54	-18.69	-69.39	-66.76	4.92	-59.95

Note: Margin value = Emission Level - Limit value

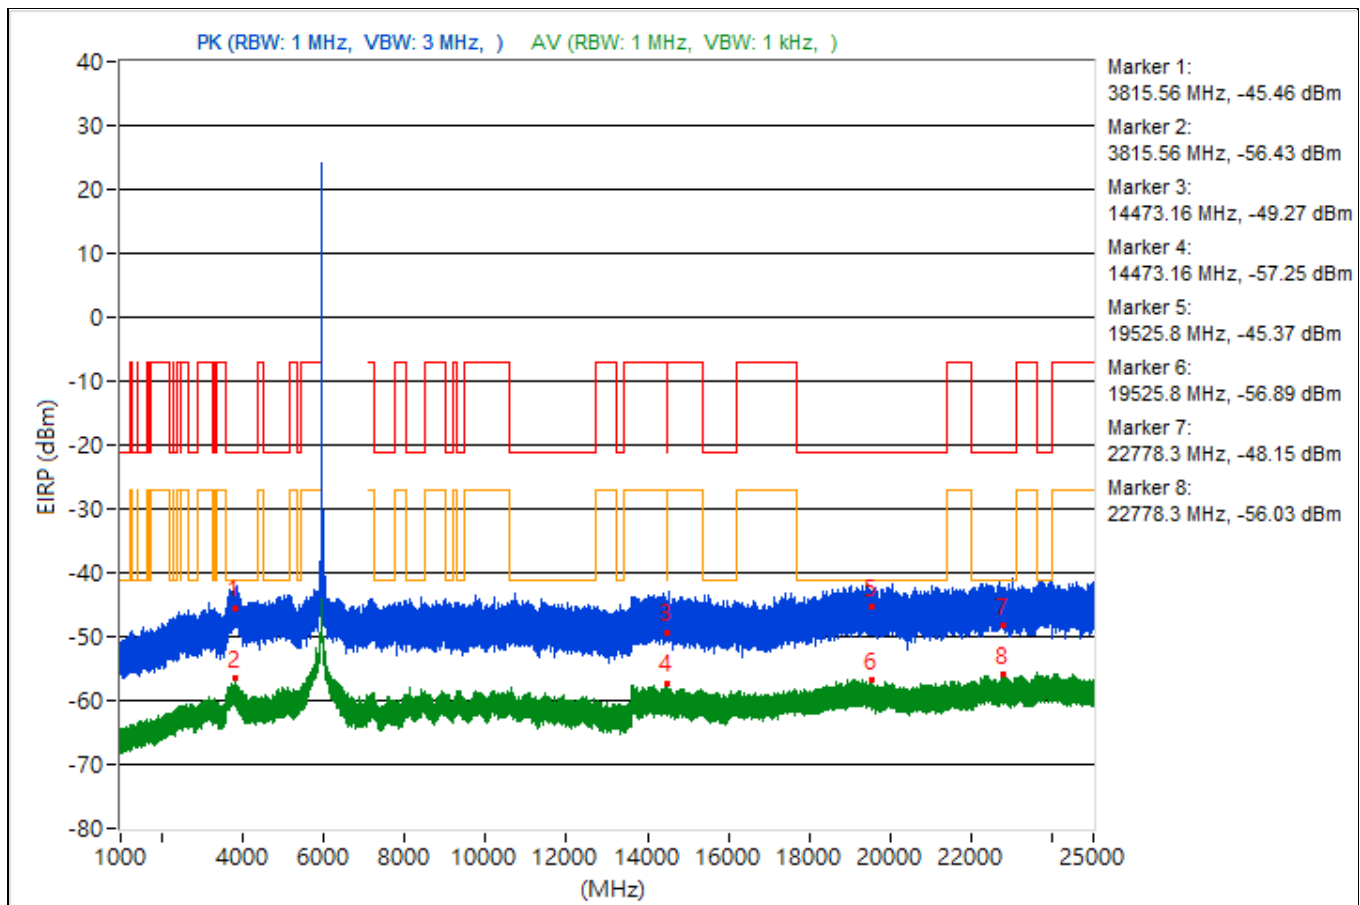


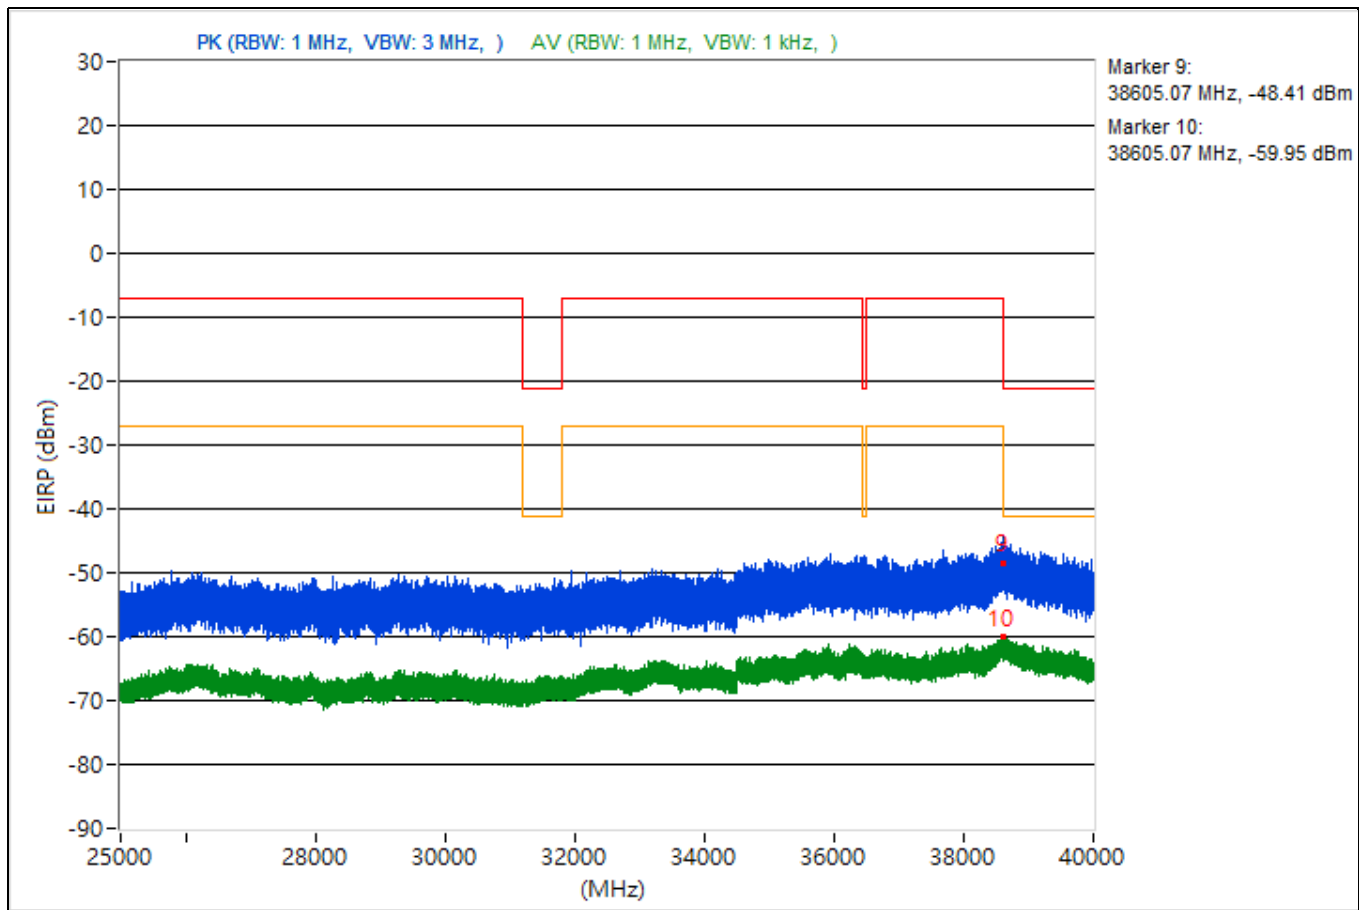


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.48	49.78 PK	74	-24.22	-54.88	-52.31	4.92	-45.48
2	5446.48	40.12 AV	54	-13.88	-63.16	-62.98	4.92	-55.14
3	14478.22	48.42 PK	74	-25.58	-55.24	-54.34	4.92	-46.84
4	14478.22	37.21 AV	54	-16.79	-66.59	-65.44	4.92	-58.05
5	19205.2	50.09 PK	74	-23.91	-55.26	-51.66	4.92	-45.17
6	19205.2	38.34 AV	54	-15.66	-66.39	-63.71	4.92	-56.92
7	22814.9	49.63 PK	74	-24.37	-52.97	-54.23	4.92	-45.63
8	22814.9	38.89 AV	54	-15.11	-65.88	-63.15	4.92	-56.37
9	38602.76	46.56 PK	74	-27.44	-56.91	-56.36	4.92	-48.7
10	38602.76	35.07 AV	54	-18.93	-69.67	-66.99	4.92	-60.19

Note: Margin value = Emission Level - Limit value

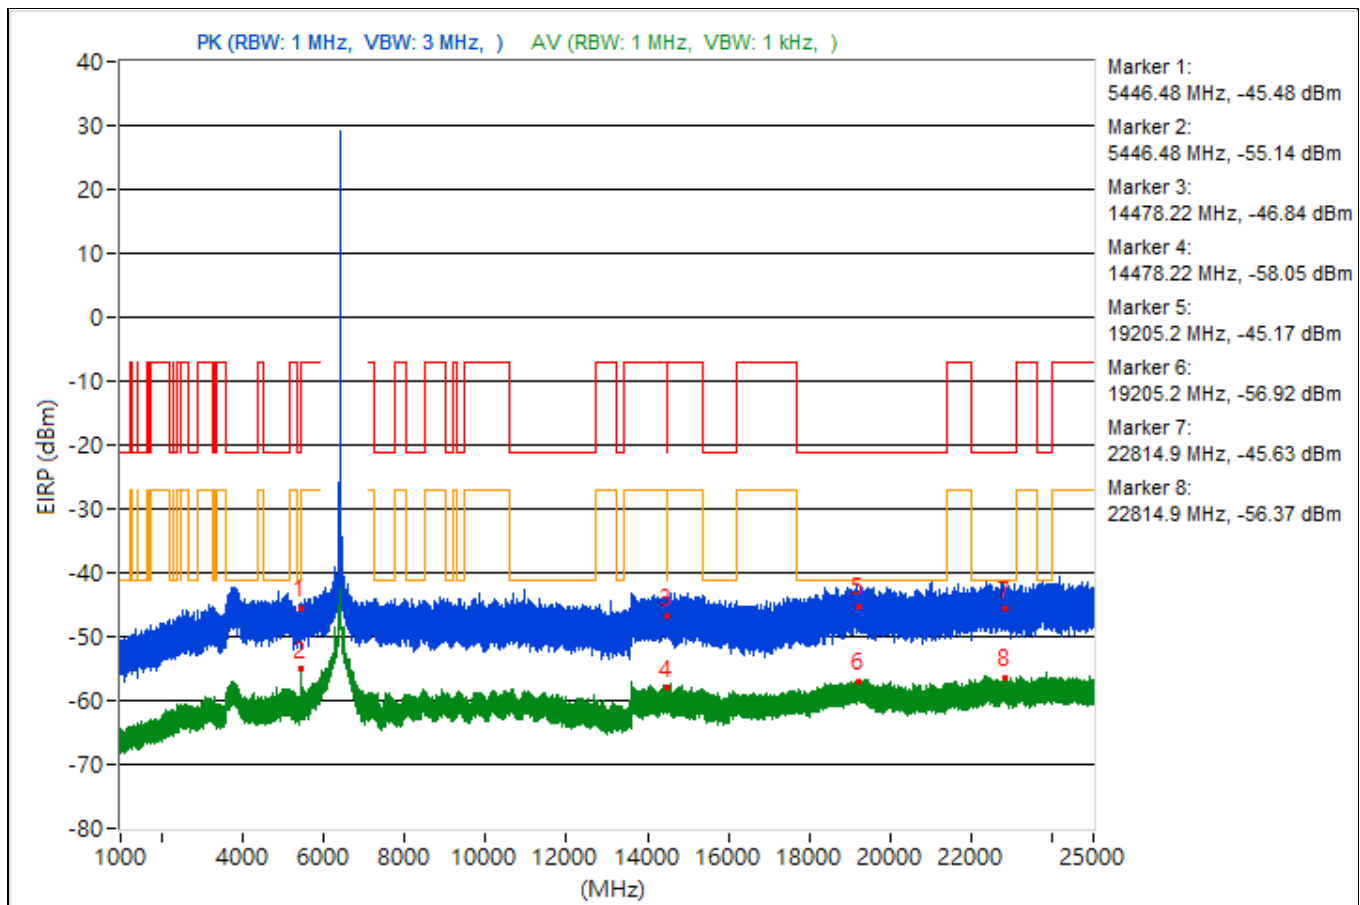


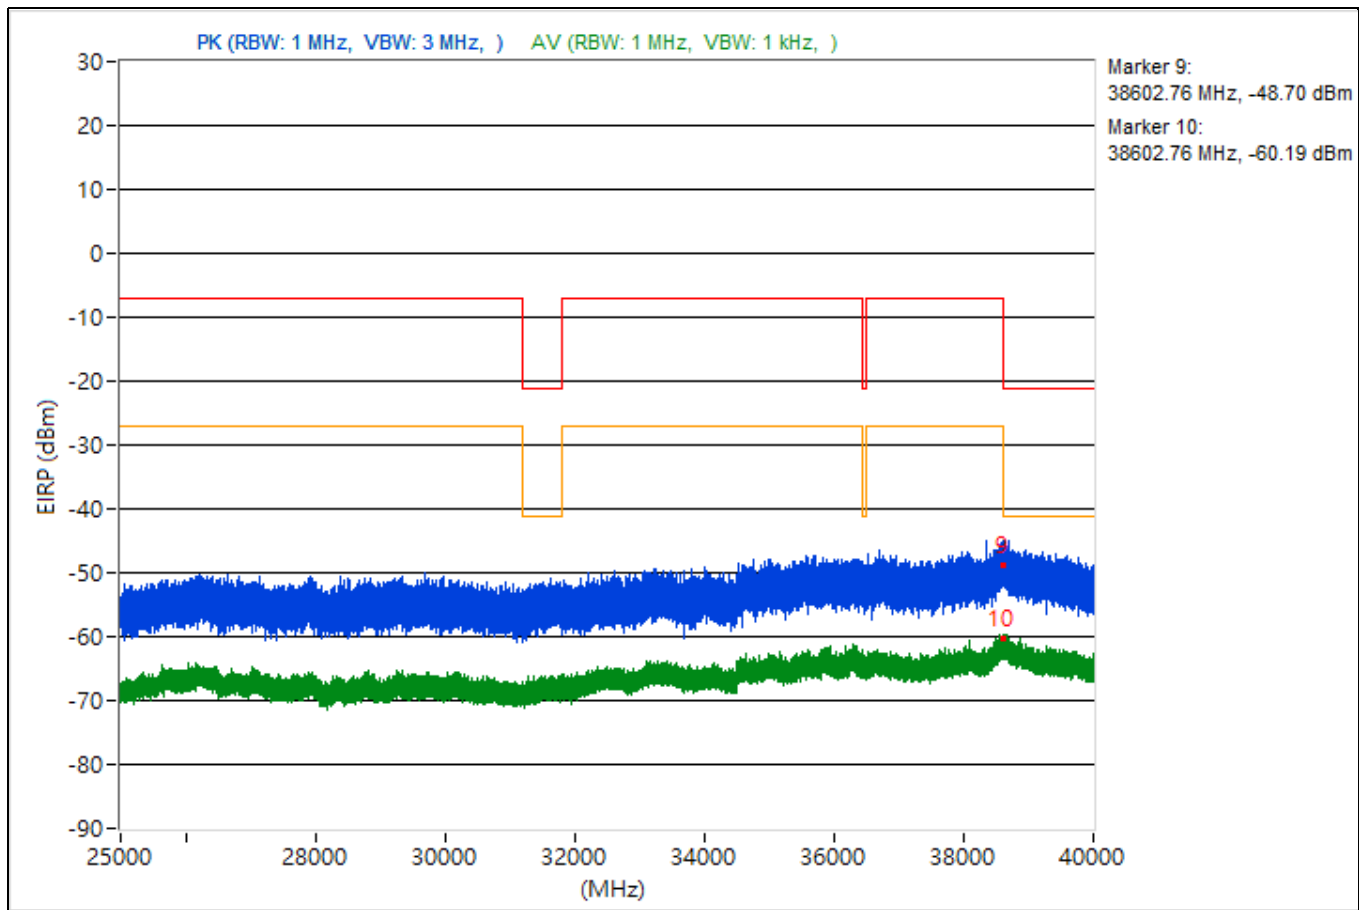


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.71	47.49 PK	74	-26.51	-56.29	-55.18	4.92	-47.77
2	3787.71	37.82 AV	54	-16.18	-67.9	-63.78	4.92	-57.44
3	10651.47	45.89 PK	74	-28.11	-58.61	-56.29	4.92	-49.37
4	10651.47	36.82 AV	54	-17.18	-68.59	-64.91	4.92	-58.44
5	19044.2	47 PK	74	-27	-56.42	-55.97	4.92	-48.26
6	19044.2	38.39 AV	54	-15.61	-63.14	-67.54	4.92	-56.87
7	23978.4	51.55 PK	74	-22.45	-53.95	-50.14	4.92	-43.71
8	23978.4	39.27 AV	54	-14.73	-62.81	-65.4	4.92	-55.99
9	38637.96	46.82 PK	74	-27.18	-57.25	-55.63	4.92	-48.44
10	38637.96	36.18 AV	54	-17.82	-67.02	-67	4.92	-59.08

Note: Margin value = Emission Level - Limit value

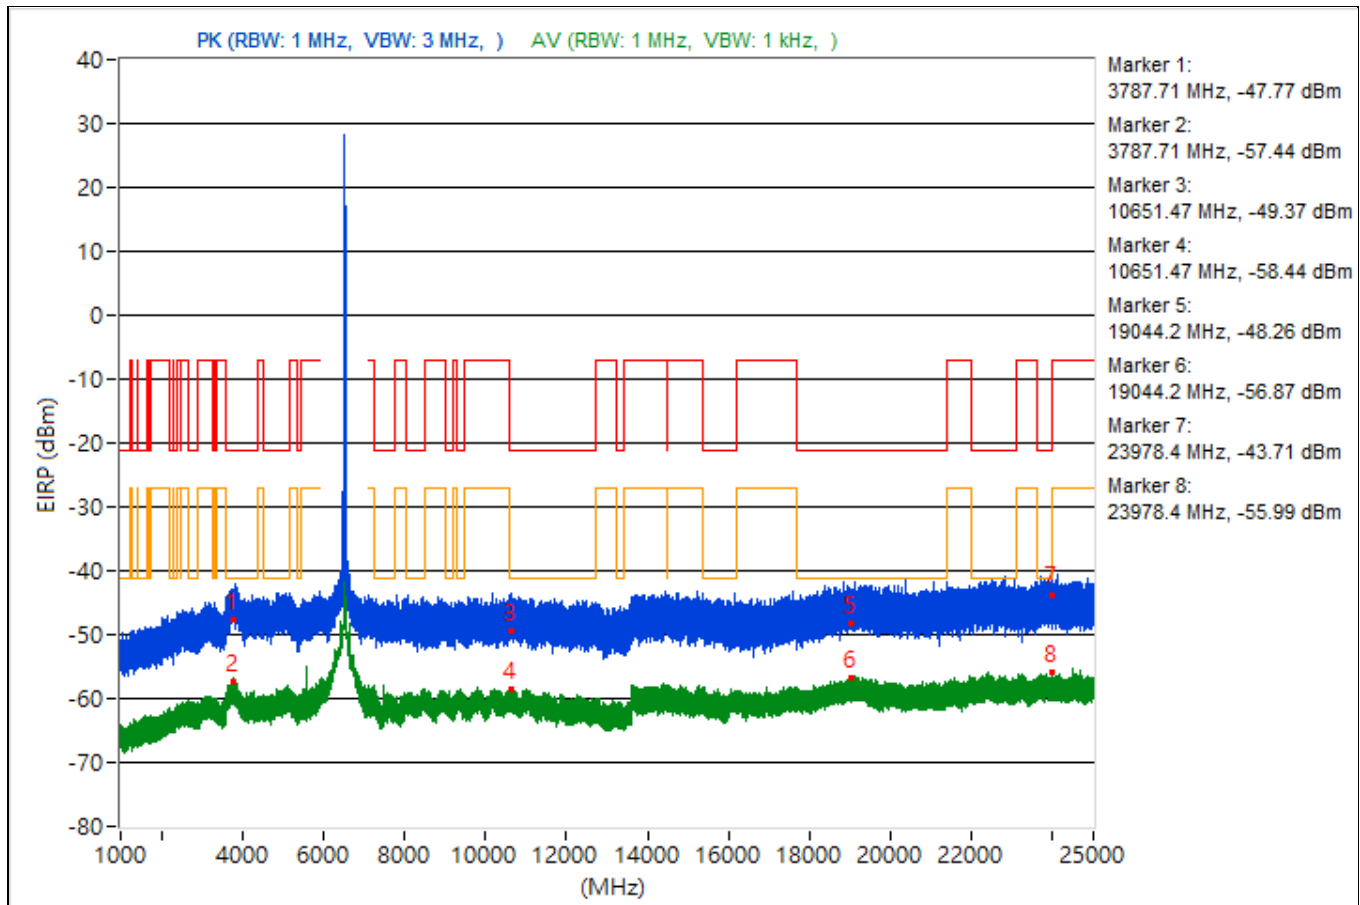


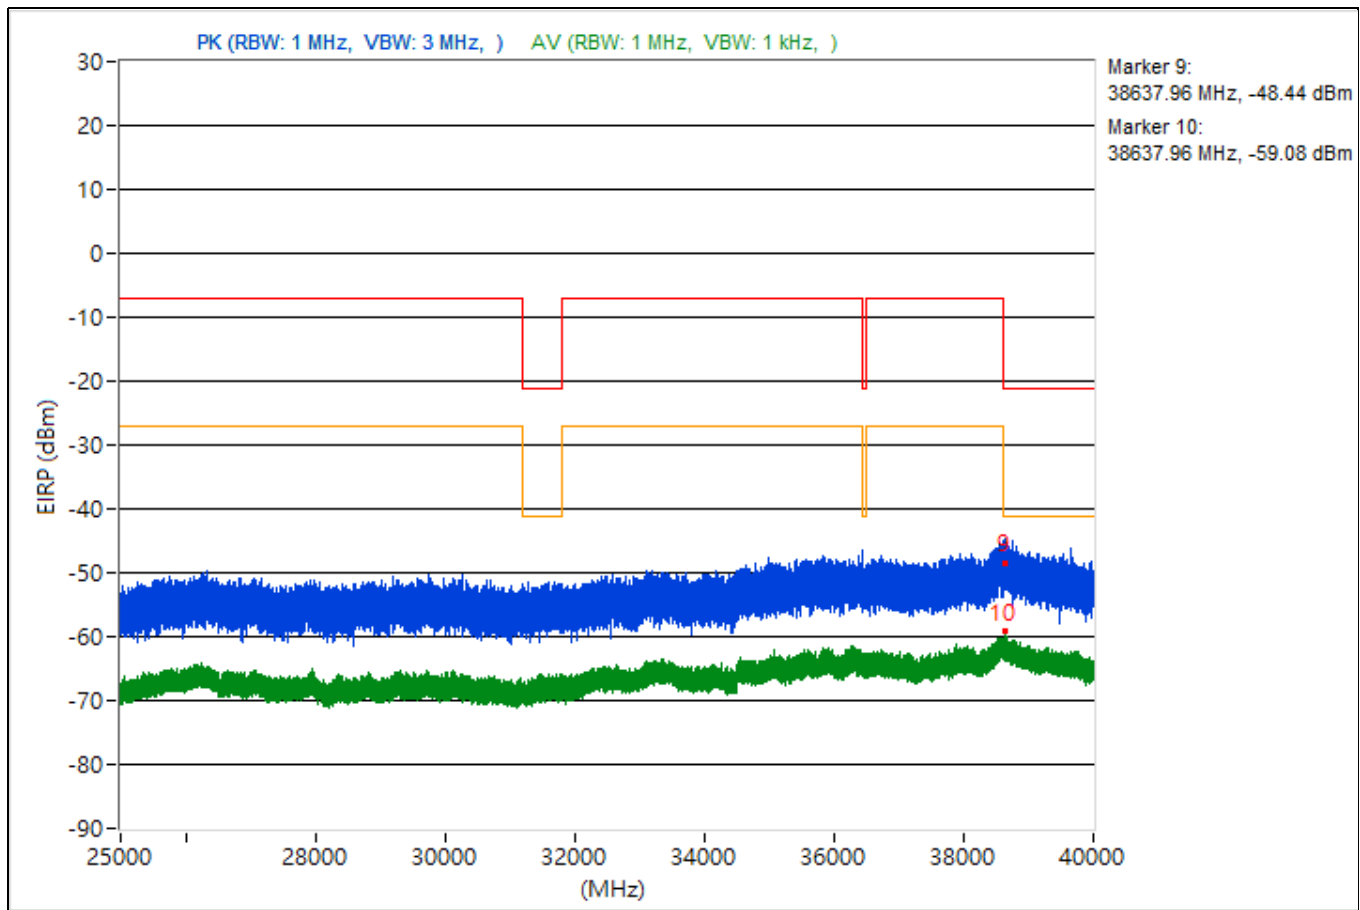


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.26	50.54 PK	74	-23.46	-52.15	-53.22	4.92	-44.72
2	3795.26	37.68 AV	54	-16.32	-64.36	-67.06	4.92	-57.58
3	7292.38	47.8 PK	74	-26.2	-54.61	-56.35	4.92	-47.46
4	7292.38	37.19 AV	54	-16.81	-68.63	-64.38	4.92	-58.07
5	19002.1	48.04 PK	74	-25.96	-54.82	-55.52	4.92	-47.22
6	19002.1	38.46 AV	54	-15.54	-66.03	-63.73	4.92	-56.8
7	22353.2	50.49 PK	74	-23.51	-52.68	-52.72	4.92	-44.77
8	22353.2	38.75 AV	54	-15.25	-62.66	-67.52	4.92	-56.51
9	38626.58	48.25 PK	74	-25.75	-56.18	-53.98	4.92	-47.01
10	38626.58	35.27 AV	54	-18.73	-66.54	-69.94	4.92	-59.99

Note: Margin value = Emission Level - Limit value

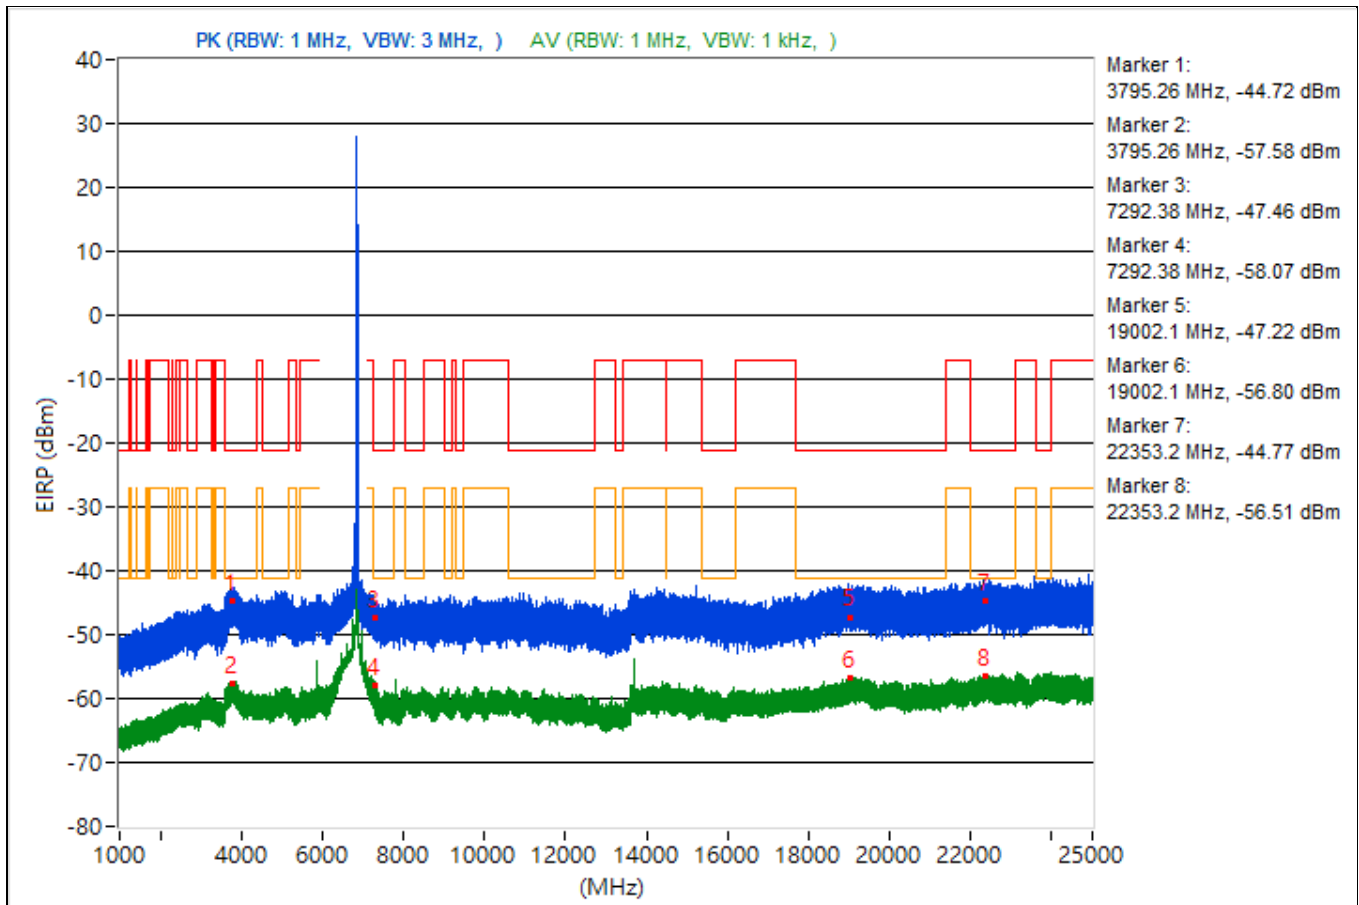


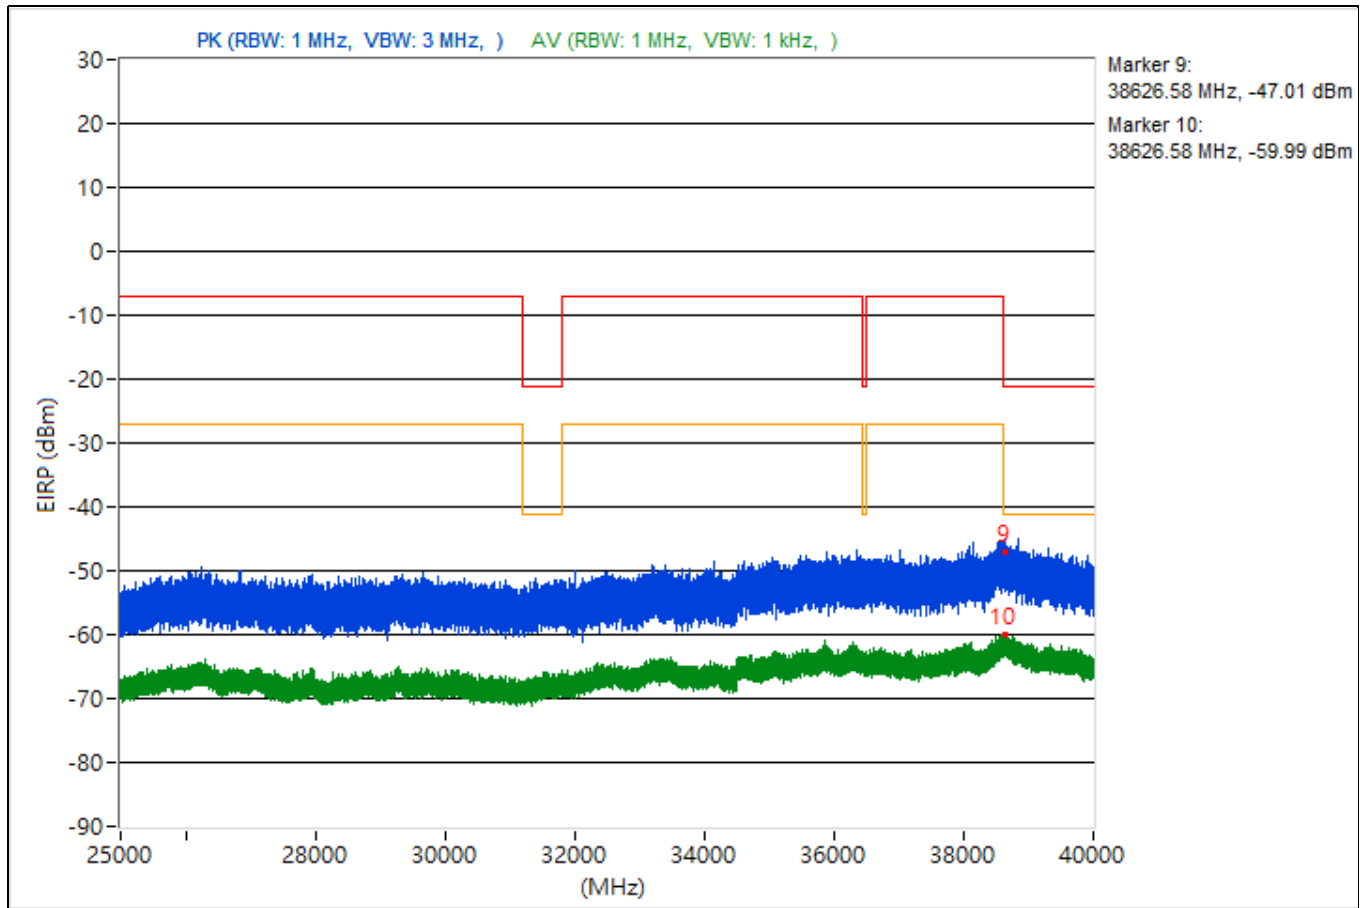


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.27	50.02 PK	74	-23.98	-52.52	-53.92	4.92	-45.24
2	3754.27	38.2 AV	54	-15.8	-66.63	-63.8	4.92	-57.06
3	14479.47	49.71 PK	74	-24.29	-52.86	-54.19	4.92	-45.55
4	14479.47	37.12 AV	54	-16.88	-65.34	-66.94	4.92	-58.14
5	19005.9	51.27 PK	74	-22.73	-53.49	-50.77	4.92	-43.99
6	19005.9	38.24 AV	54	-15.76	-66.31	-63.92	4.92	-57.02
7	22419.7	50.4 PK	74	-23.6	-53.01	-52.59	4.92	-44.86
8	22419.7	38.32 AV	54	-15.68	-67.77	-63.15	4.92	-56.94
9	38647.11	45.68 PK	74	-28.32	-56.52	-58.79	4.92	-49.58
10	38647.11	34.81 AV	54	-19.19	-67.89	-68.95	4.92	-60.45

Note: Margin value = Emission Level - Limit value

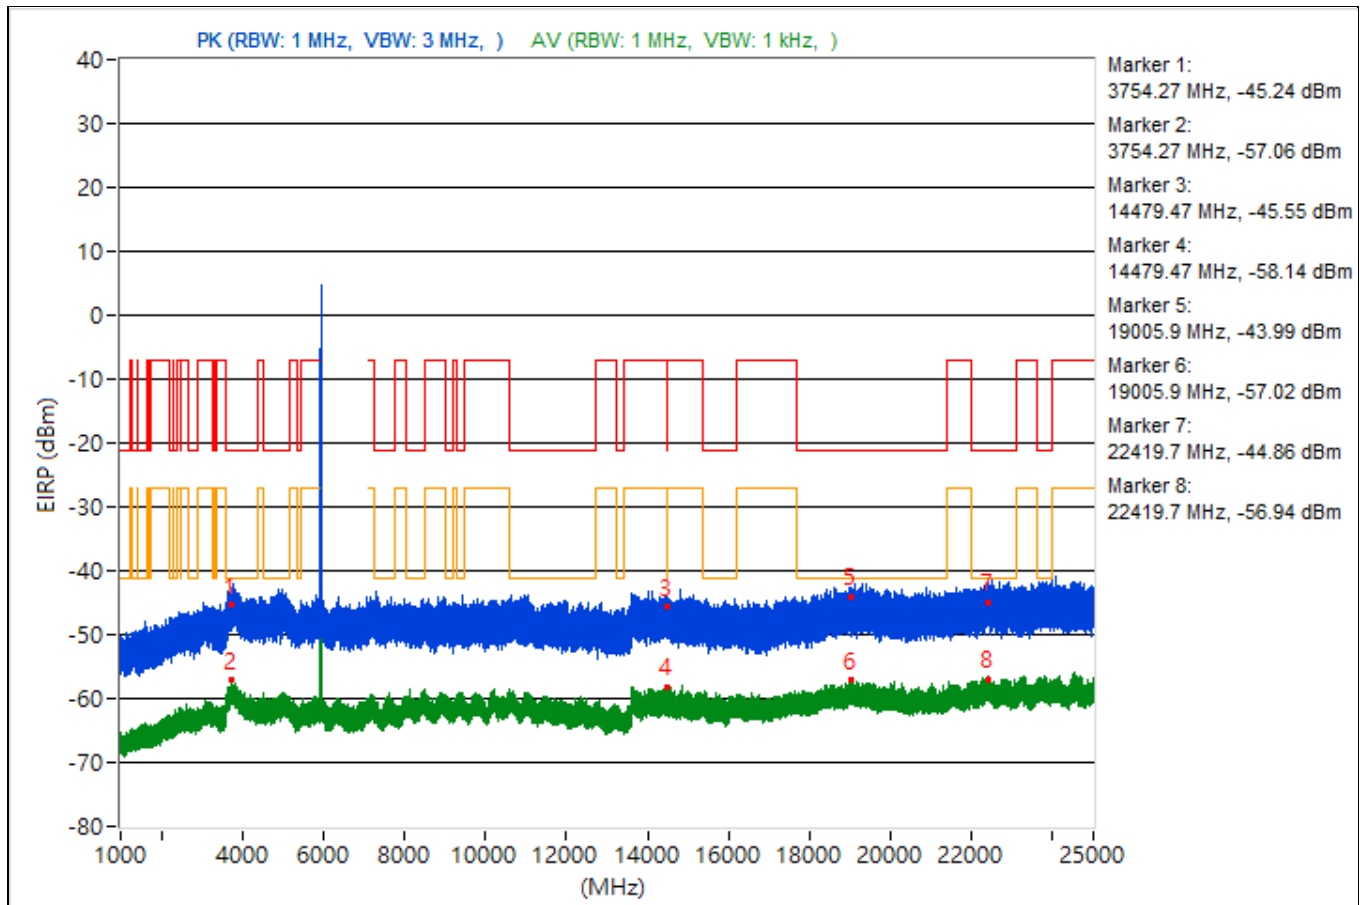


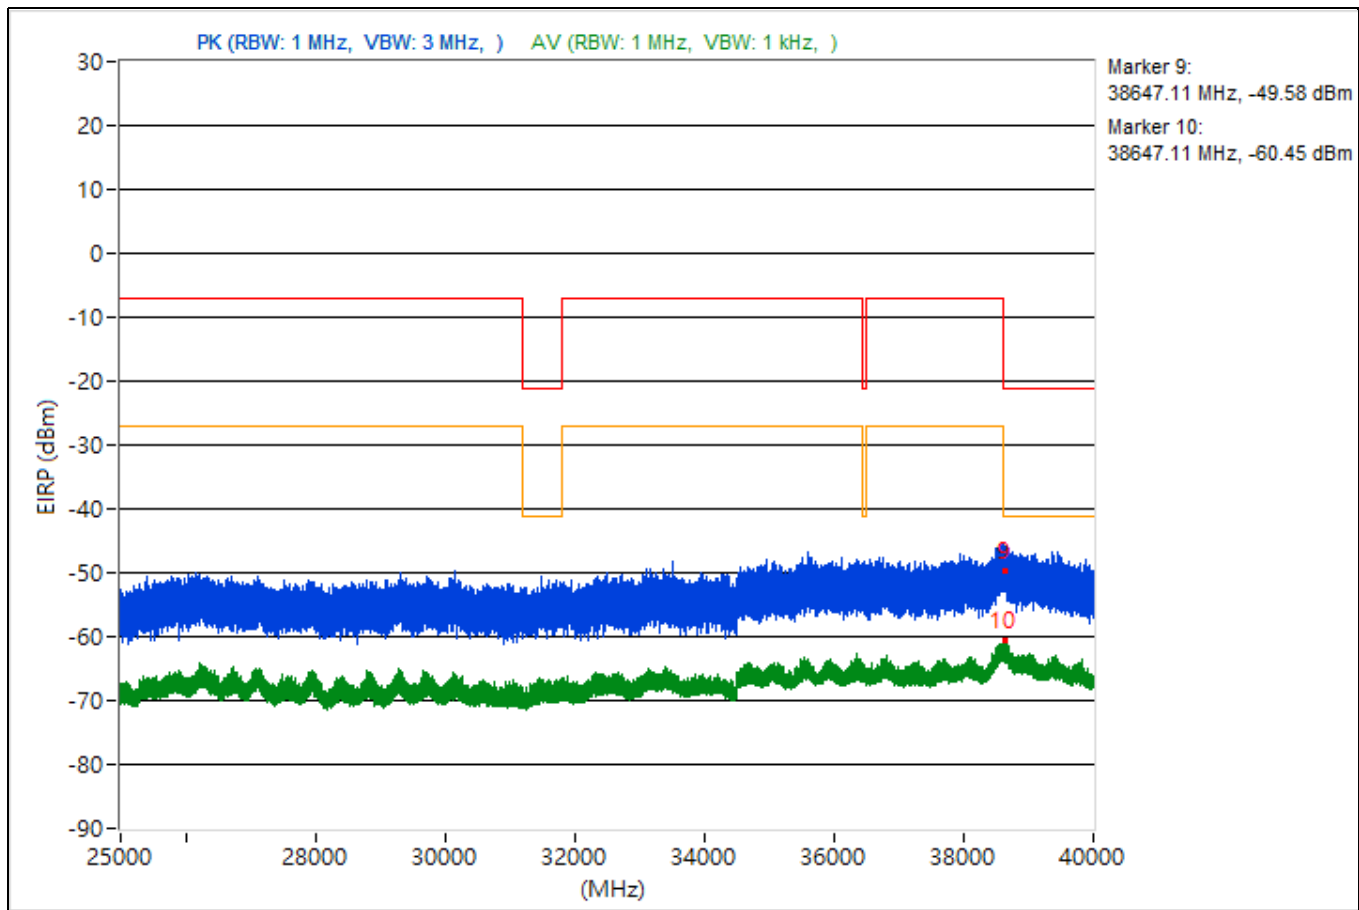


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3755.67	50.44 PK	74	-23.56	-52.81	-52.69	4.92	-44.82
2	3755.67	38.01 AV	54	-15.99	-66.86	-63.97	4.92	-57.25
3	14483.82	47.82 PK	74	-26.18	-55.5	-55.25	4.92	-47.44
4	14483.82	37.61 AV	54	-16.39	-65.18	-66.02	4.92	-57.65
5	19420.2	50.68 PK	74	-23.32	-51.14	-54.54	4.92	-44.58
6	19420.2	38.28 AV	54	-15.72	-66.86	-63.57	4.92	-56.98
7	23899.6	49.59 PK	74	-24.41	-55.75	-52.17	4.92	-45.67
8	23899.6	38.88 AV	54	-15.12	-63.02	-66.17	4.92	-56.38
9	38629.51	47.56 PK	74	-26.44	-56.52	-54.9	4.92	-47.7
10	38629.51	34.63 AV	54	-19.37	-71.06	-66.98	4.92	-60.63

Note: Margin value = Emission Level - Limit value

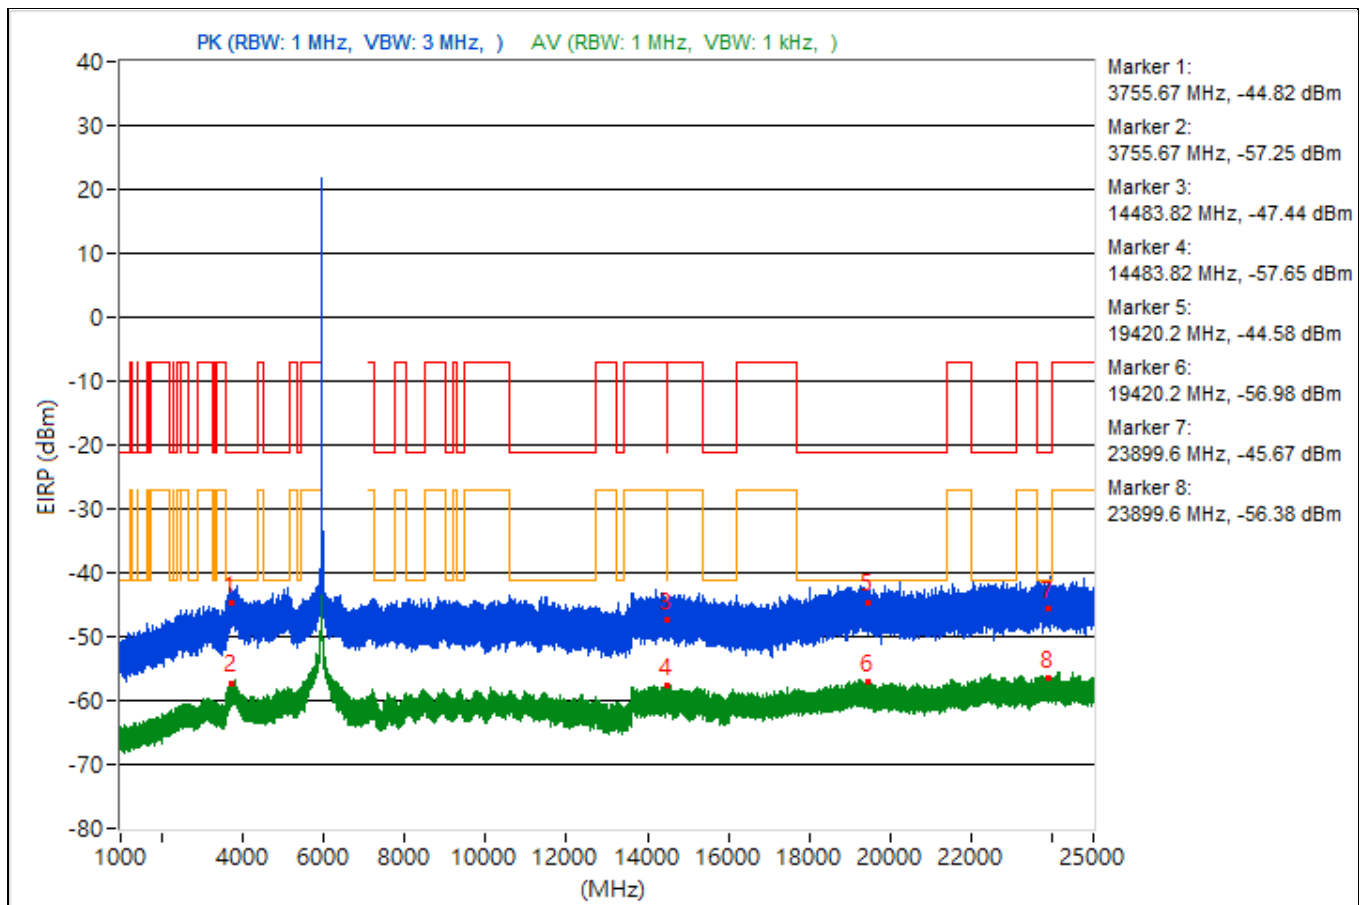


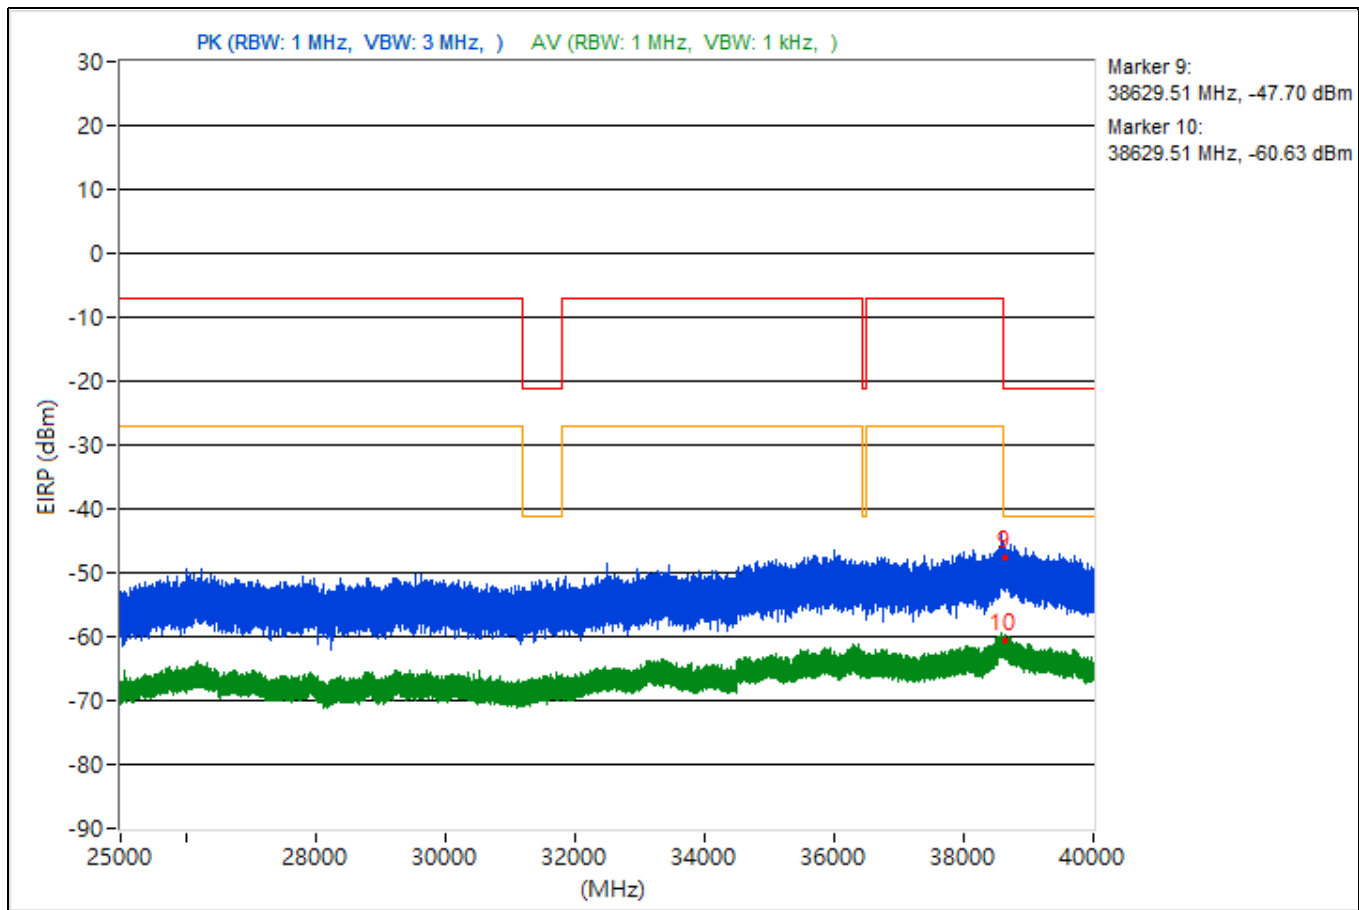


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.49	48.27 PK	74	-25.73	-55.5	-54.42	4.92	-46.99
2	5447.49	38.49 AV	54	-15.51	-65.74	-63.86	4.92	-56.77
3	9339.11	46.63 PK	74	-27.37	-56.58	-56.55	4.92	-48.63
4	9339.11	36.99 AV	54	-17.01	-67.29	-65.33	4.92	-58.27
5	19189.2	47.78 PK	74	-26.22	-55.5	-55.33	4.92	-47.48
6	19189.2	38.06 AV	54	-15.94	-63.68	-67.34	4.92	-57.2
7	22230.4	49.46 PK	74	-24.54	-52.56	-55.32	4.92	-45.8
8	22230.4	39.03 AV	54	-14.97	-62.46	-66.98	4.92	-56.23
9	38648.98	43.7 PK	74	-30.3	-59.97	-59.05	4.92	-51.56
10	38648.98	35.7 AV	54	-18.3	-66.78	-68.35	4.92	-59.56

Note: Margin value = Emission Level - Limit value

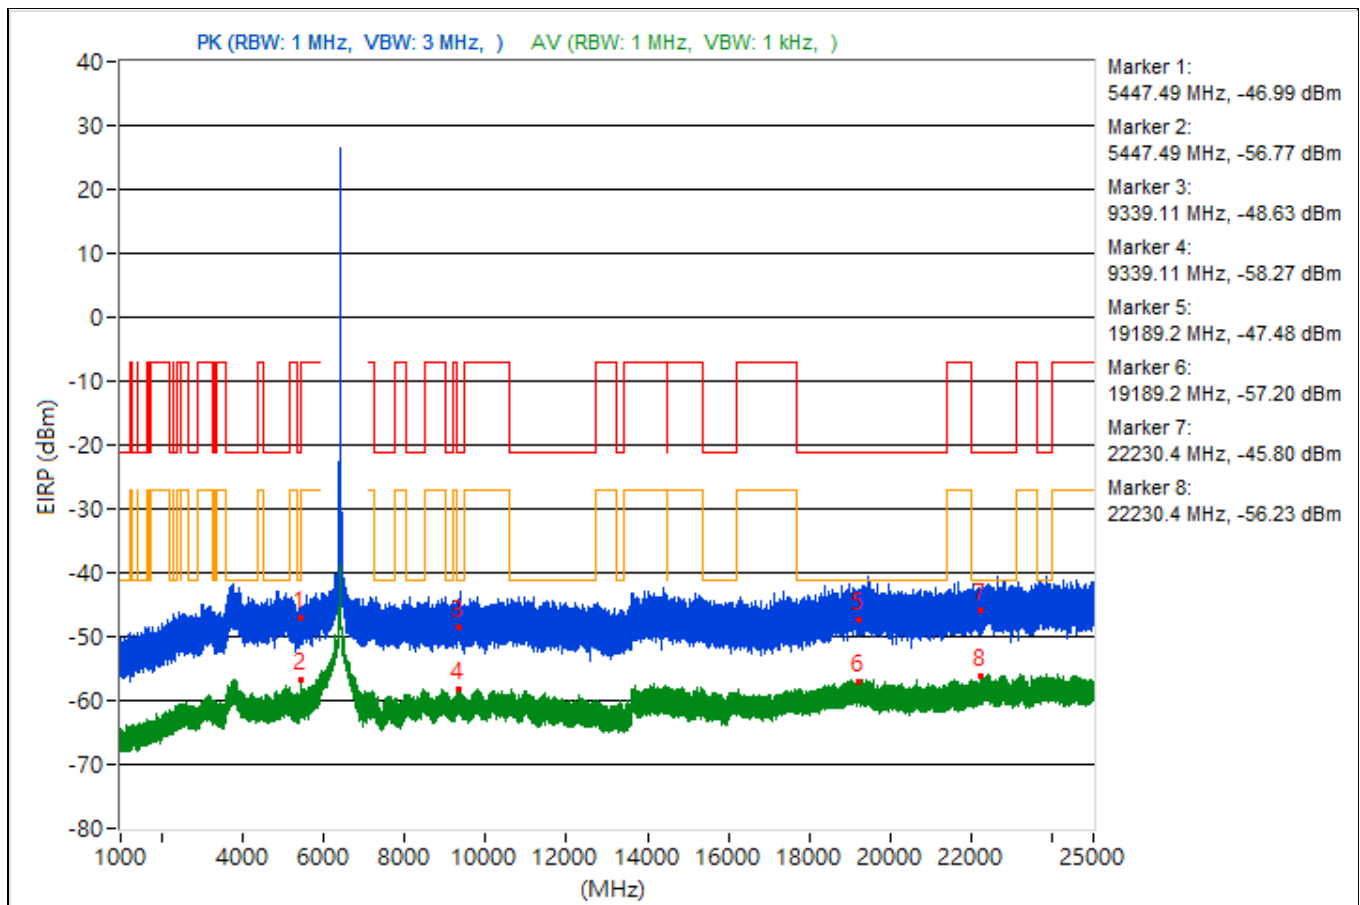


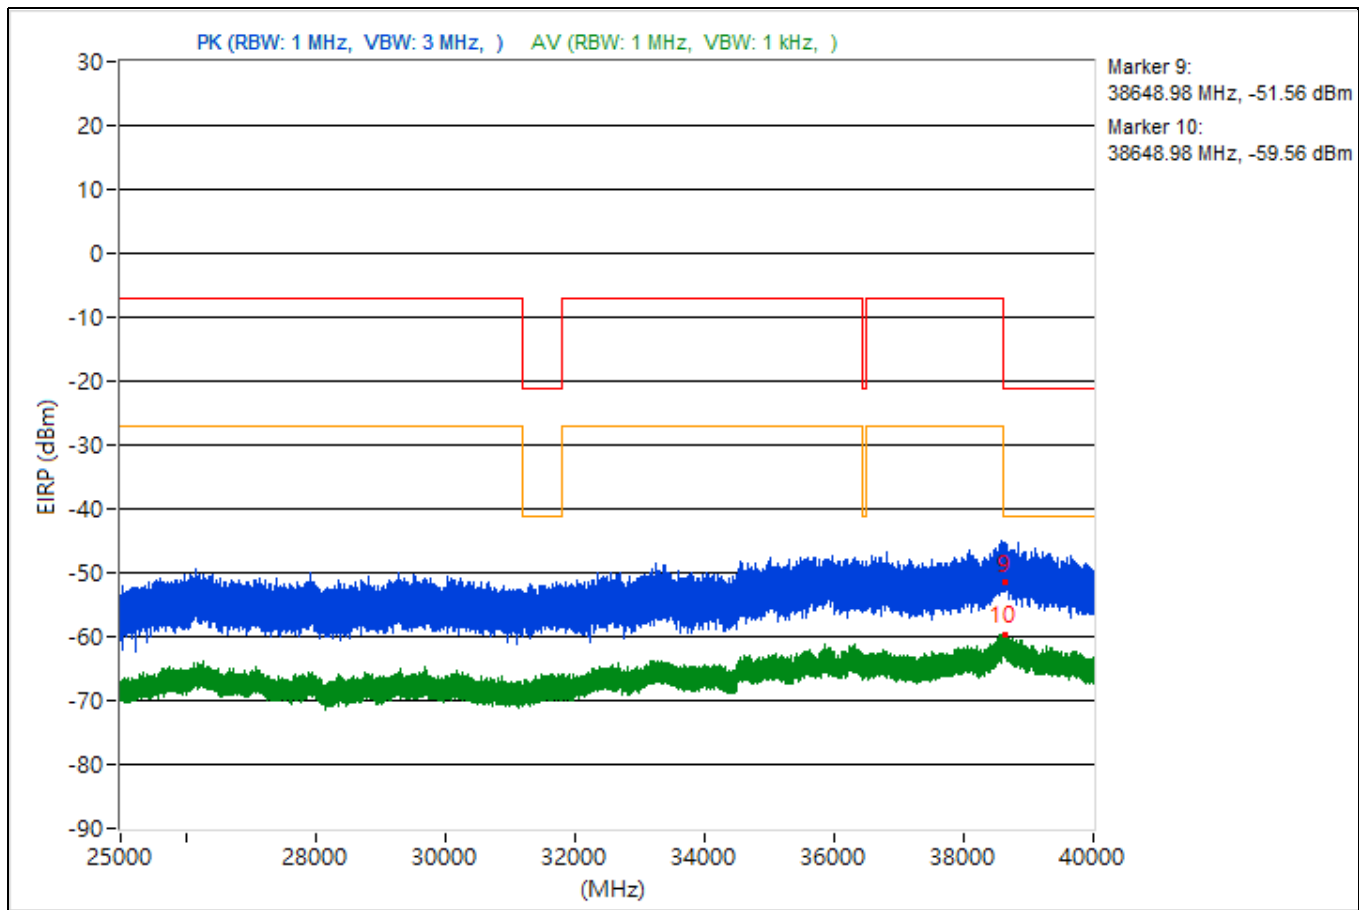


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.24	48.63 PK	74	-25.37	-54.55	-54.57	4.92	-46.63
2	3808.24	37.75 AV	54	-16.25	-67.07	-64.26	4.92	-57.51
3	14478.67	47.84 PK	74	-26.16	-56.8	-54.26	4.92	-47.42
4	14478.67	37.06 AV	54	-16.94	-67.33	-65.19	4.92	-58.2
5	19344	49.22 PK	74	-24.78	-55.44	-52.88	4.92	-46.04
6	19344	38.03 AV	54	-15.97	-63.42	-68.1	4.92	-57.23
7	23659.9	49.99 PK	74	-24.01	-52.22	-54.45	4.92	-45.27
8	23659.9	39.32 AV	54	-14.68	-63.11	-64.79	4.92	-55.94
9	38610.4	45.8 PK	74	-28.2	-58.44	-56.55	4.92	-49.46
10	38610.4	35.69 AV	54	-18.31	-68.23	-66.88	4.92	-59.57

Note: Margin value = Emission Level - Limit value

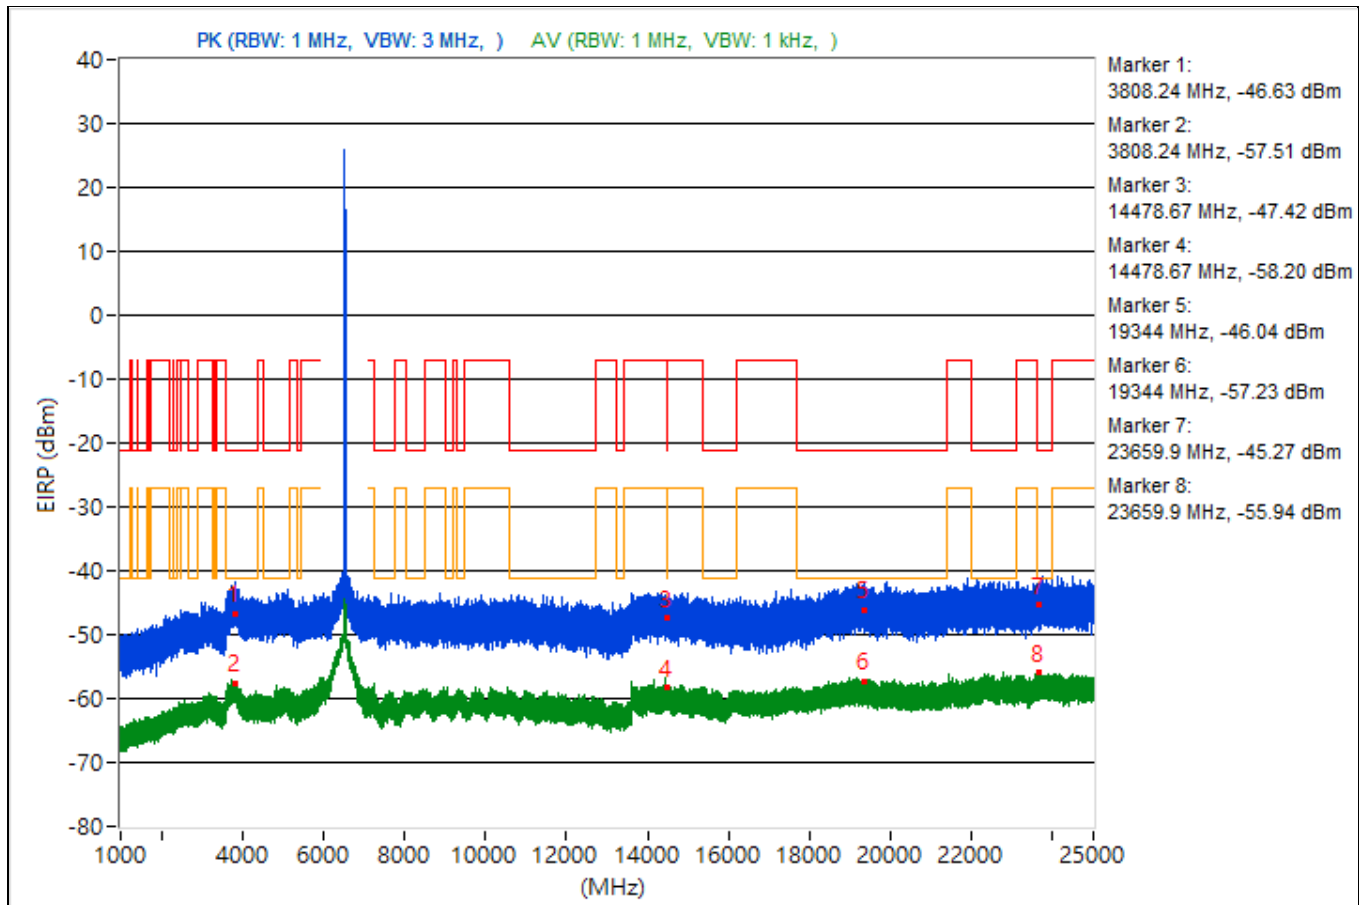


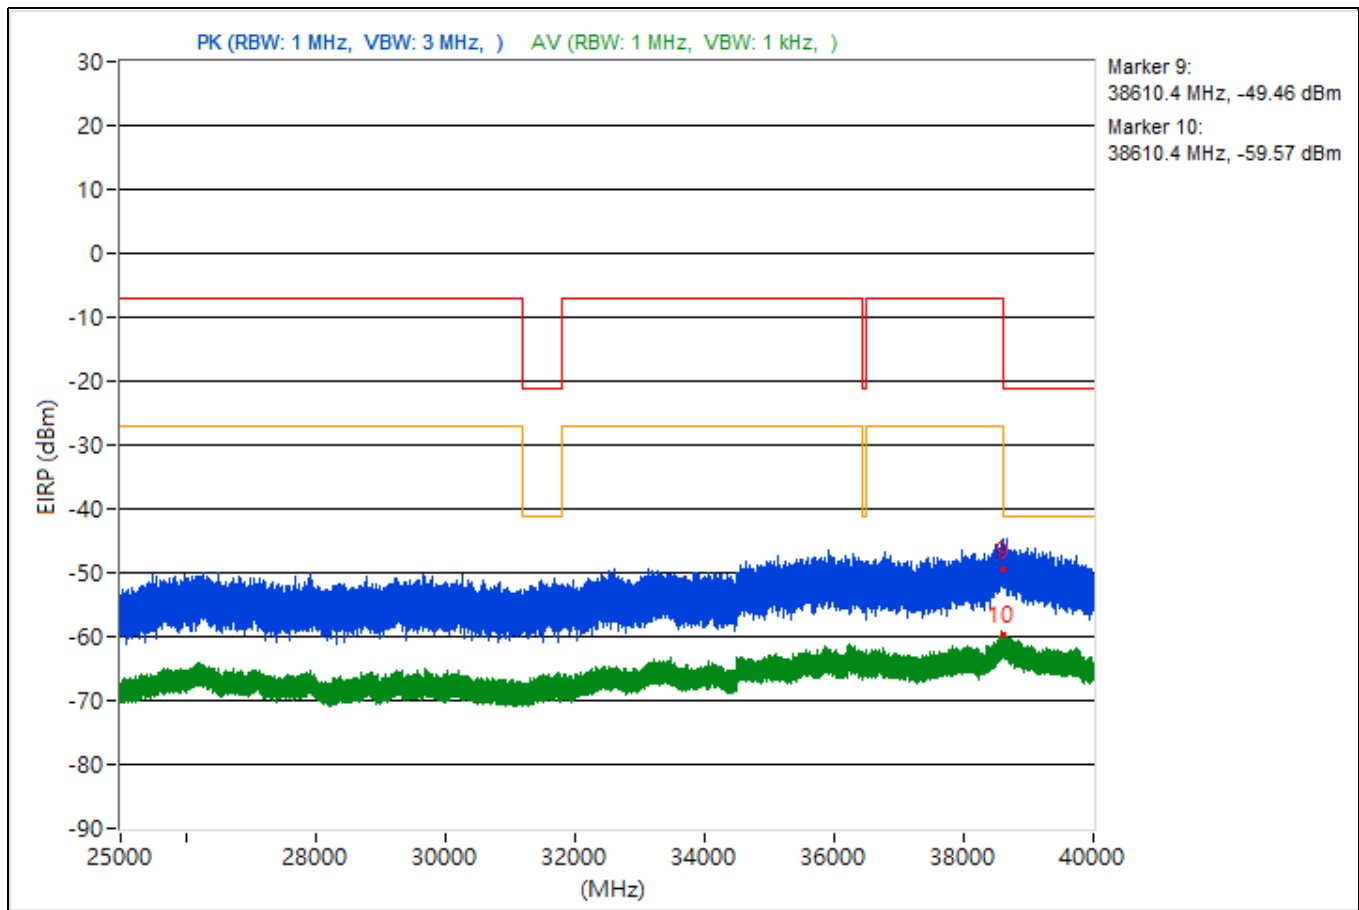


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3859.58	49.96 PK	74	-24.04	-52.97	-53.51	4.92	-45.3
2	3859.58	37.65 AV	54	-16.35	-64.17	-67.54	4.92	-57.61
3	10673.07	46.92 PK	74	-27.08	-55.26	-57.6	4.92	-48.34
4	10673.07	37.09 AV	54	-16.91	-65.19	-67.24	4.92	-58.17
5	19162.4	49.06 PK	74	-24.94	-53.19	-55.32	4.92	-46.2
6	19162.4	39.01 AV	54	-14.99	-63.59	-64.87	4.92	-56.25
7	23967.8	49.24 PK	74	-24.76	-55.49	-52.82	4.92	-46.02
8	23967.8	38.49 AV	54	-15.51	-62.92	-67.77	4.92	-56.77
9	38600.71	48.78 PK	74	-25.22	-53.8	-55.12	4.92	-46.48
10	38600.71	35.1 AV	54	-18.9	-69.72	-66.91	4.92	-60.16

Note: Margin value = Emission Level - Limit value

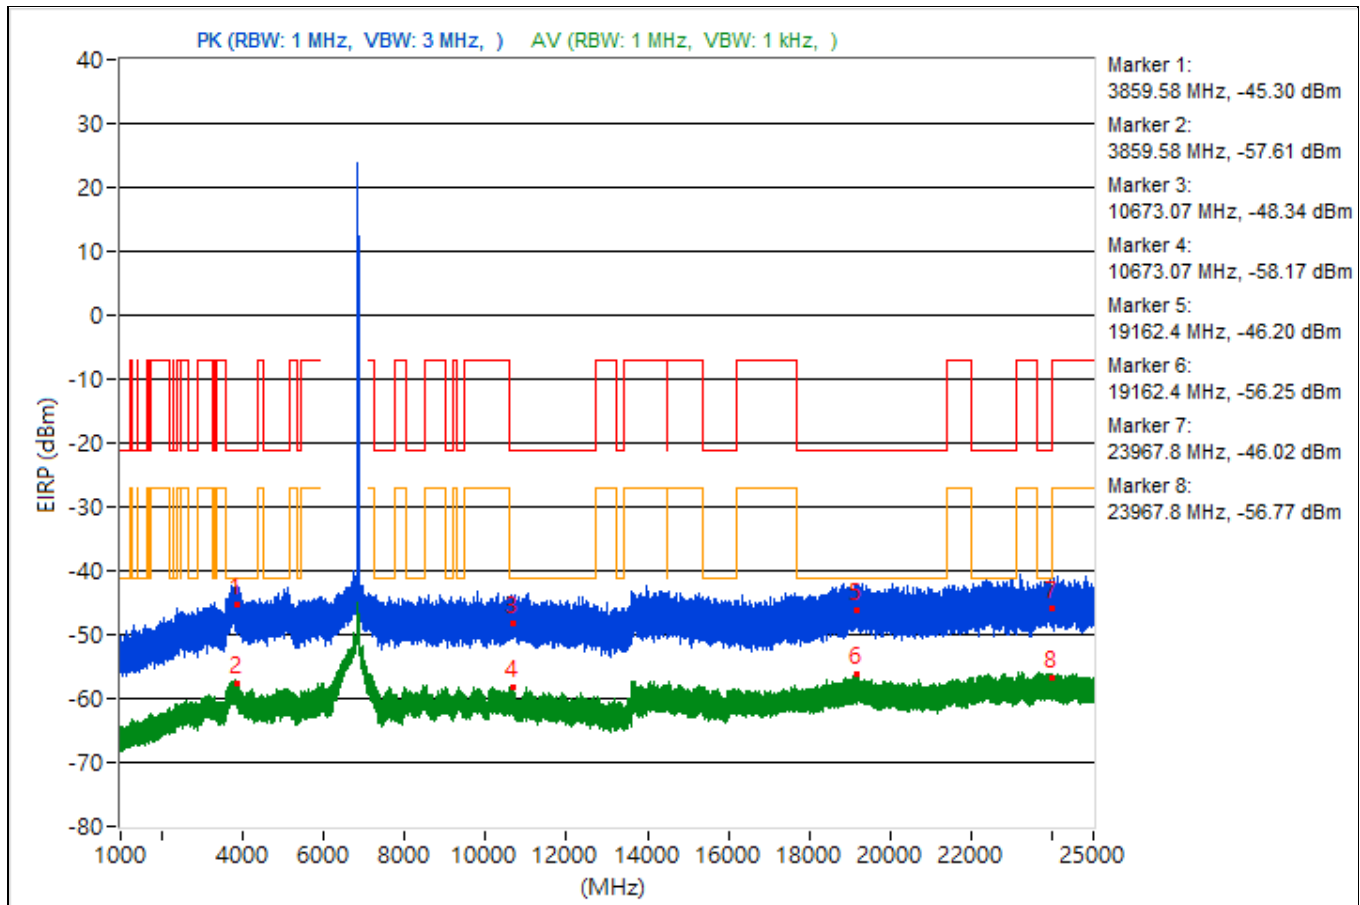


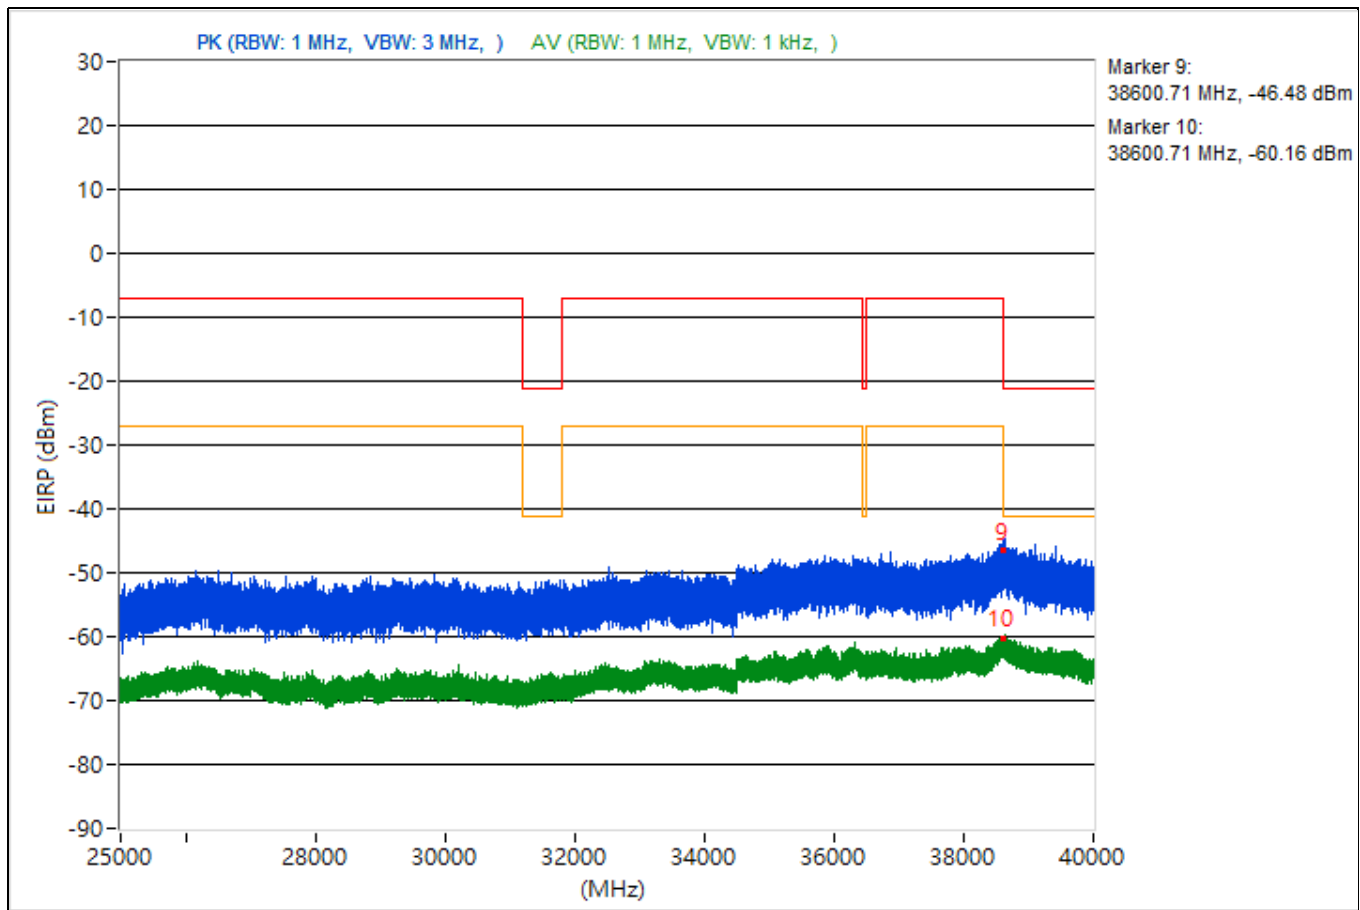


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3746.18	47.56 PK	74	-26.44	-57.26	-54.45	4.92	-47.7
2	3746.18	37.34 AV	54	-16.66	-64.14	-68.73	4.92	-57.92
3	14495.91	46.6 PK	74	-27.4	-55.96	-57.33	4.92	-48.66
4	14495.91	36.85 AV	54	-17.15	-68.43	-64.94	4.92	-58.41
5	19102.5	46.9 PK	74	-27.1	-55.63	-57.06	4.92	-48.36
6	19102.5	37.42 AV	54	-16.58	-63.84	-69.33	4.92	-57.84
7	22848.5	47.34 PK	74	-26.66	-55.14	-56.72	4.92	-47.92
8	22848.5	38.58 AV	54	-15.42	-63.06	-67.05	4.92	-56.68
9	38605.6	44.36 PK	74	-29.64	-57.93	-59.97	4.92	-50.9
10	38605.6	34.96 AV	54	-19.04	-67.51	-69.09	4.92	-60.3

Note: Margin value = Emission Level - Limit value

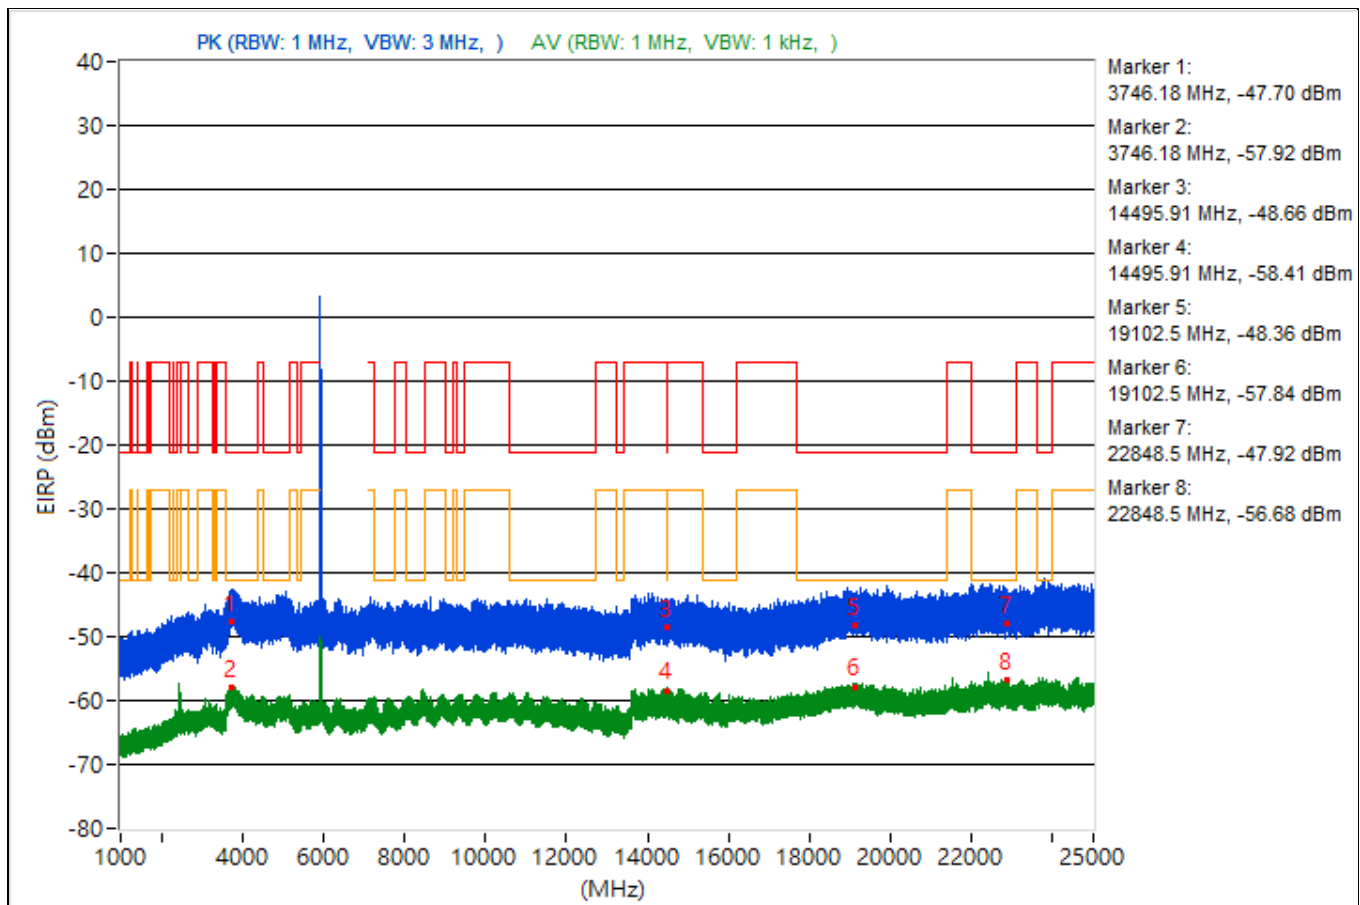


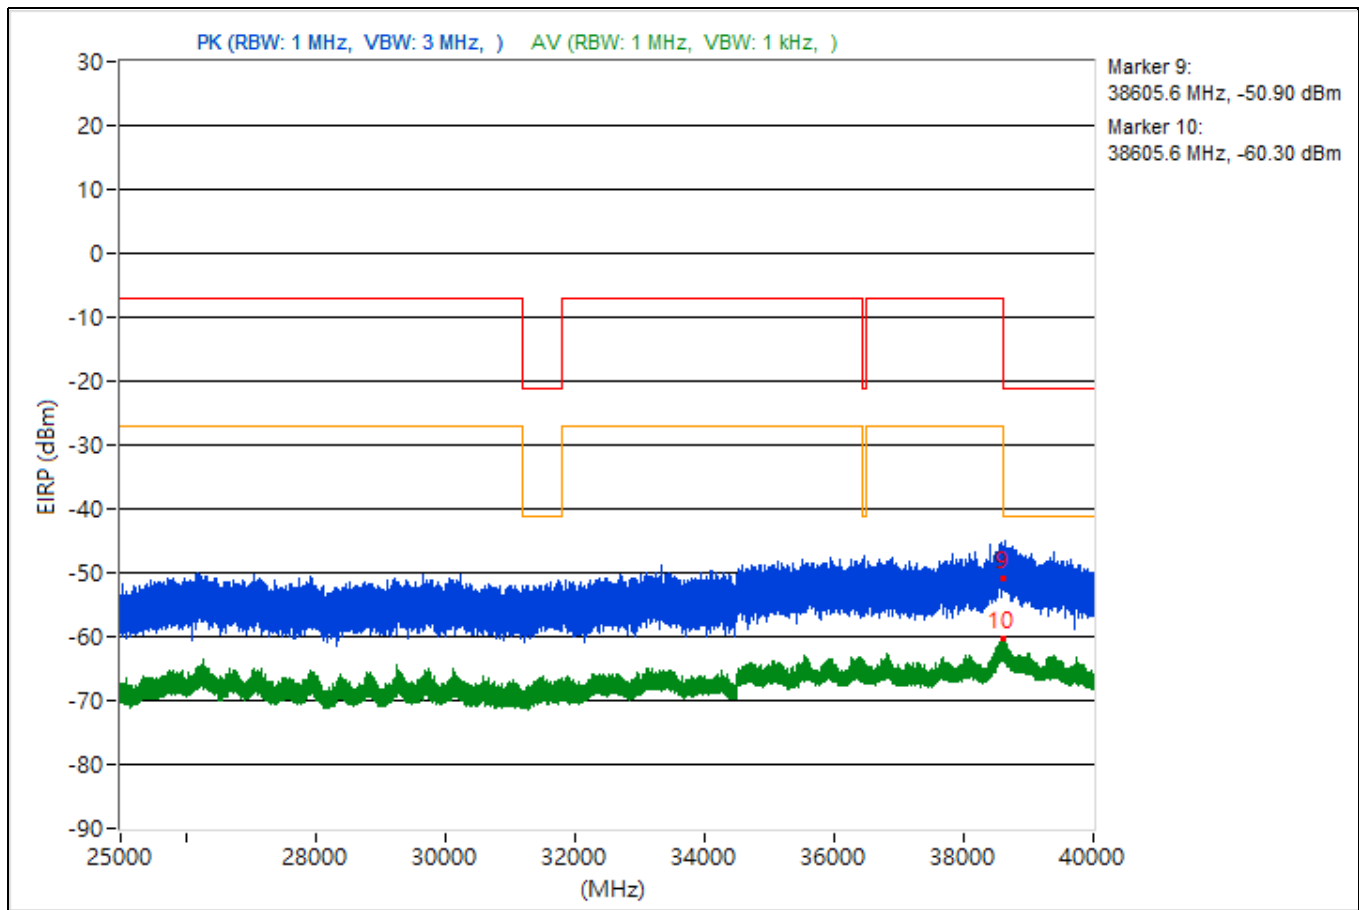


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4986.19	49.37 PK	74	-24.63	-52.83	-55.12	4.92	-45.89
2	4986.19	38.86 AV	54	-15.14	-64.75	-63.95	4.92	-56.4
3	14492.98	49.14 PK	74	-24.86	-54.5	-53.63	4.92	-46.12
4	14492.98	37.57 AV	54	-16.43	-65.32	-65.95	4.92	-57.69
5	18999.8	49.73 PK	74	-24.27	-52.64	-54.46	4.92	-45.53
6	18999.8	38.38 AV	54	-15.62	-66.21	-63.74	4.92	-56.88
7	22334.3	49.3 PK	74	-24.7	-55.54	-52.7	4.92	-45.96
8	22334.3	39.69 AV	54	-14.31	-63.09	-63.96	4.92	-55.57
9	38610.84	45.17 PK	74	-28.83	-56.38	-60.69	4.92	-50.09
10	38610.84	35.48 AV	54	-18.52	-69.01	-66.72	4.92	-59.78

Note: Margin value = Emission Level - Limit value

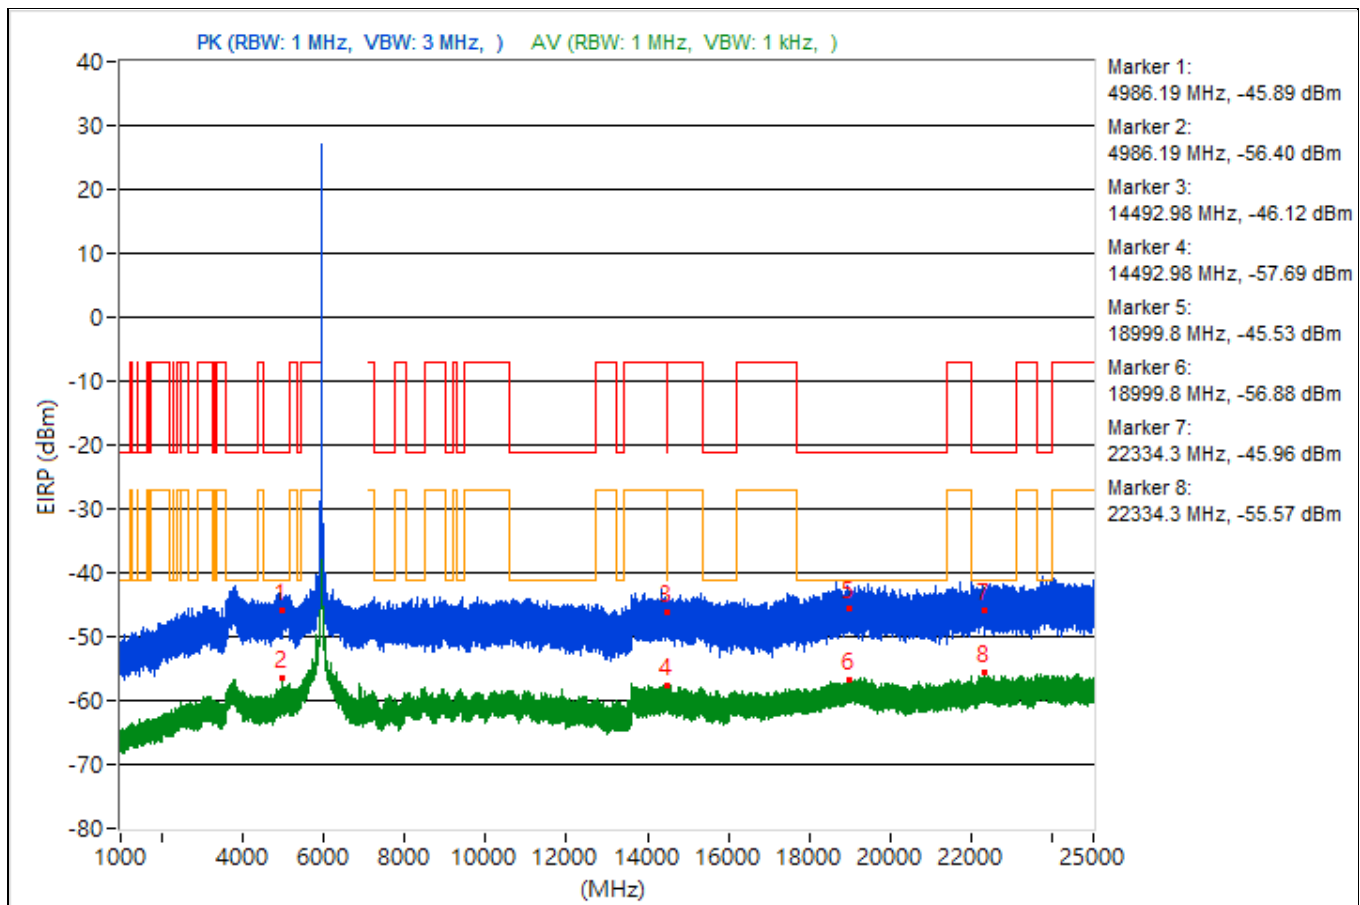


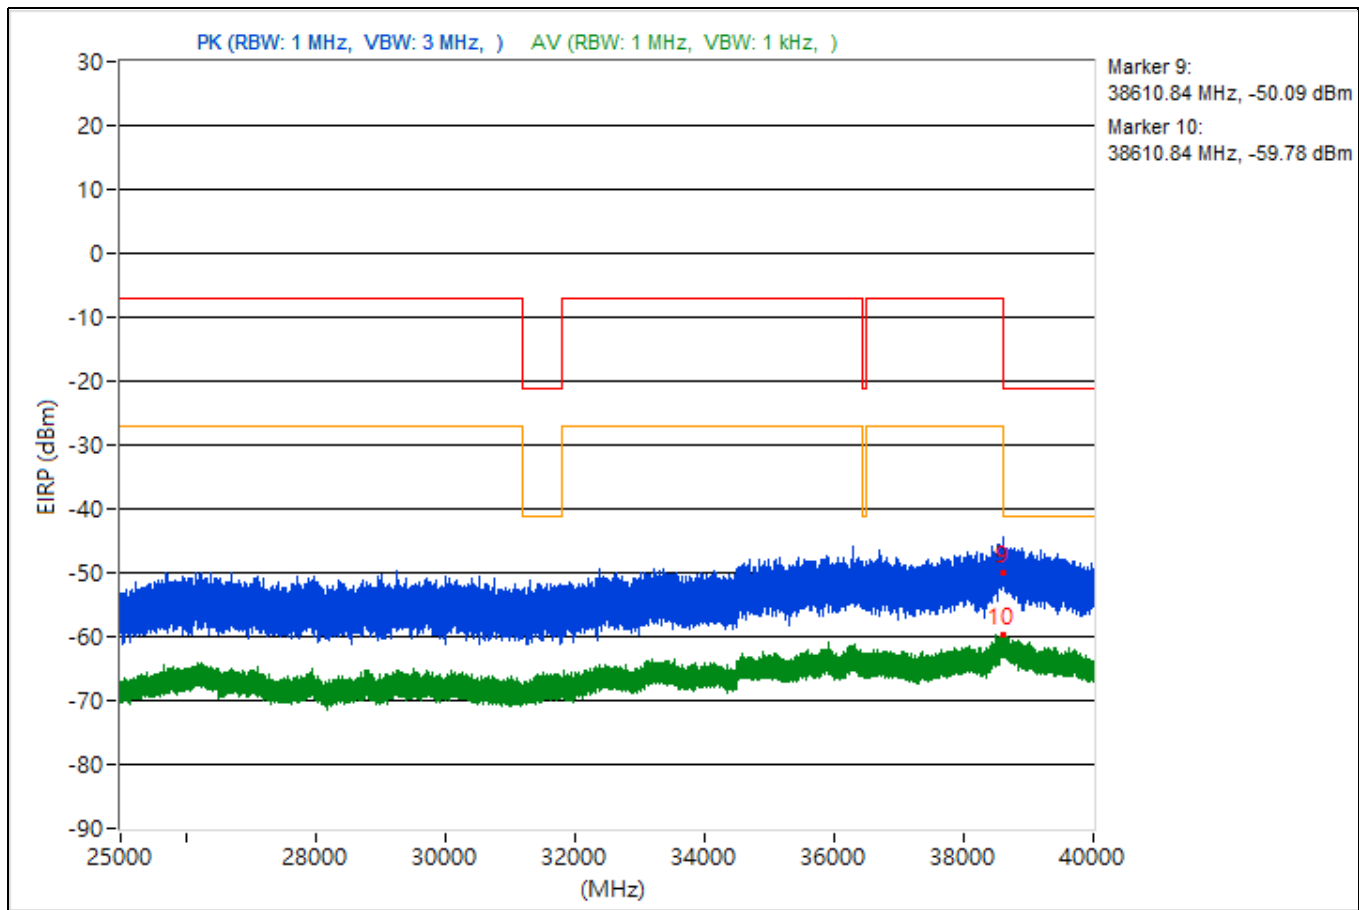


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.48	46.67 PK	74	-27.33	-56.45	-56.58	4.92	-48.59
2	5446.48	39.08 AV	54	-14.92	-64.88	-63.45	4.92	-56.18
3	8477.33	48.4 PK	74	-25.6	-52.96	-58.03	4.92	-46.86
4	8477.33	36.97 AV	54	-17.03	-67.68	-65.12	4.92	-58.29
5	19311.8	48.99 PK	74	-25.01	-53.26	-55.41	4.92	-46.27
6	19311.8	39.1 AV	54	-14.9	-65.12	-63.27	4.92	-56.16
7	22263.7	50.94 PK	74	-23.06	-54.19	-50.91	4.92	-44.32
8	22263.7	38.6 AV	54	-15.4	-62.92	-67.36	4.92	-56.66
9	38663.73	44.53 PK	74	-29.47	-59.33	-58.08	4.92	-50.73
10	38663.73	35.44 AV	54	-18.56	-66.74	-69.06	4.92	-59.82

Note: Margin value = Emission Level - Limit value

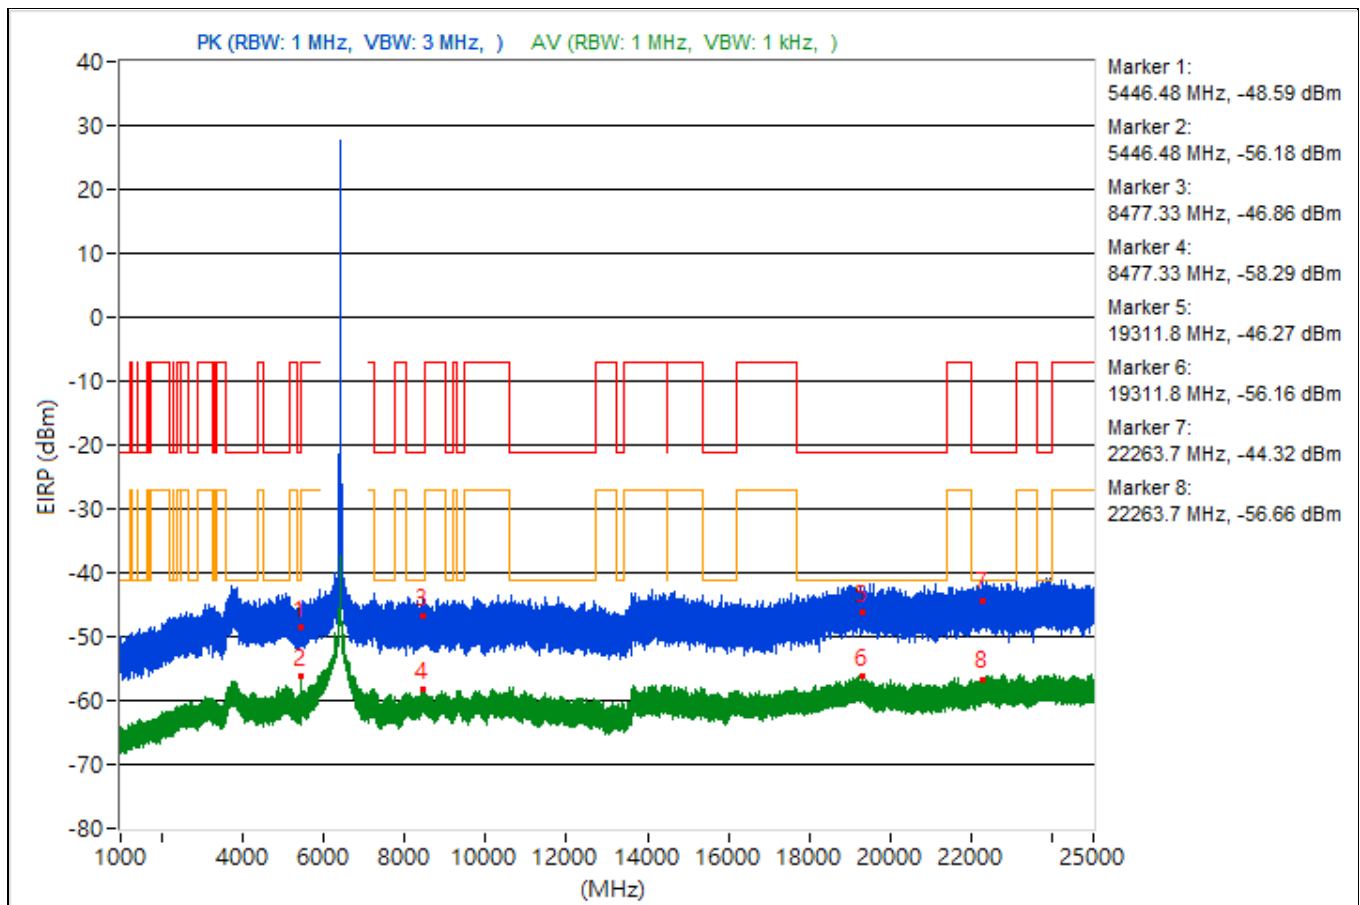


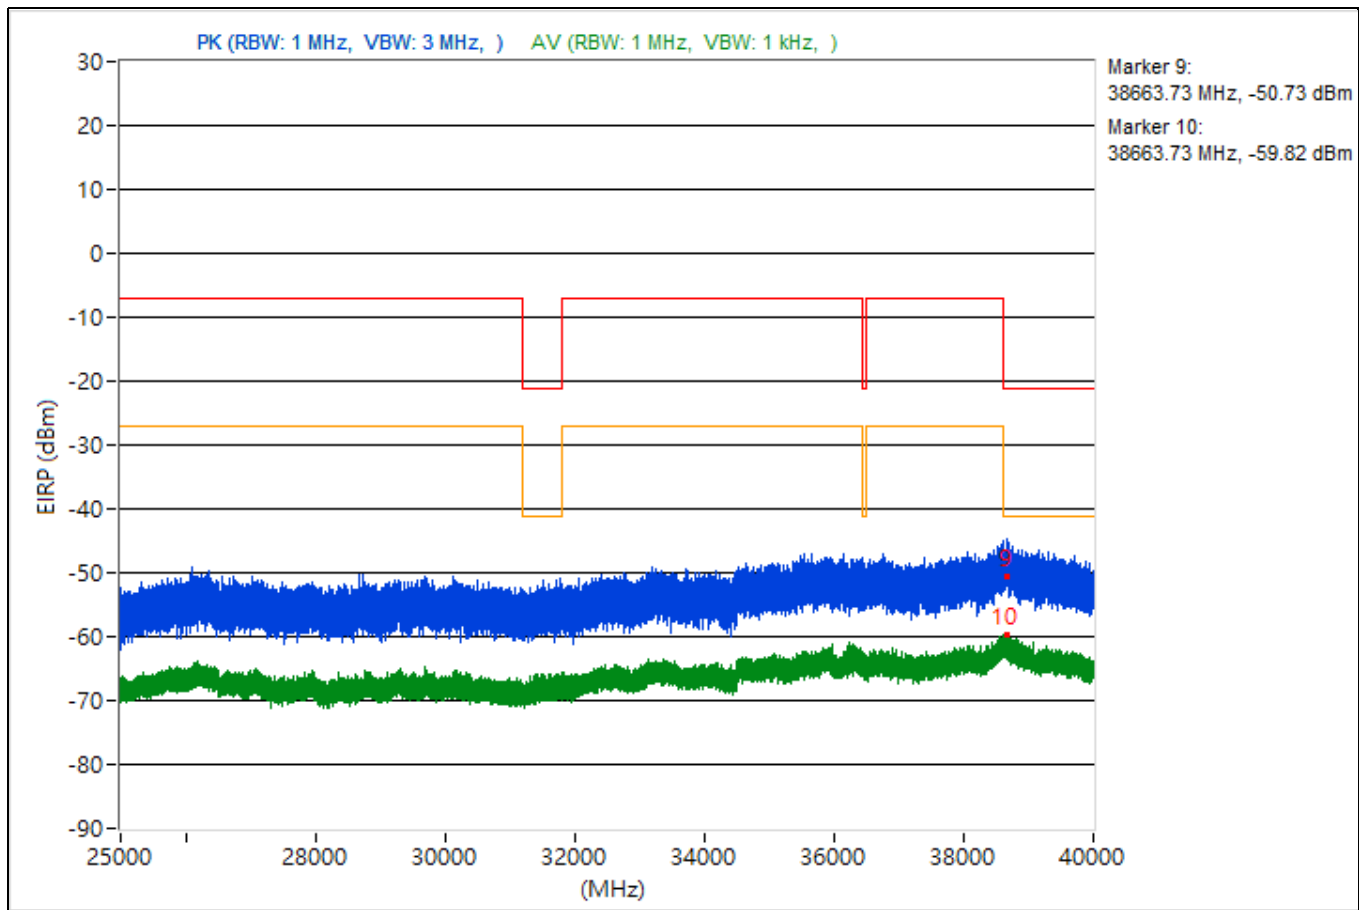


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.6	50.87 PK	74	-23.13	-50.96	-54.32	4.92	-44.39
2	3742.6	37.98 AV	54	-16.02	-66.41	-64.26	4.92	-57.28
3	14499.82	47.99 PK	74	-26.01	-55.1	-55.3	4.92	-47.27
4	14499.82	38 AV	54	-16	-64.67	-65.79	4.92	-57.26
5	19132.5	48.24 PK	74	-25.76	-55.86	-54.2	4.92	-47.02
6	19132.5	38.78 AV	54	-15.22	-63.35	-65.81	4.92	-56.48
7	23662.6	49.44 PK	74	-24.56	-52.68	-55.18	4.92	-45.82
8	23662.6	39.7 AV	54	-14.3	-64.77	-62.5	4.92	-55.56
9	38749.51	45.61 PK	74	-28.39	-56.62	-58.82	4.92	-49.65
10	38749.51	35.5 AV	54	-18.5	-67.09	-68.39	4.92	-59.76

Note: Margin value = Emission Level - Limit value

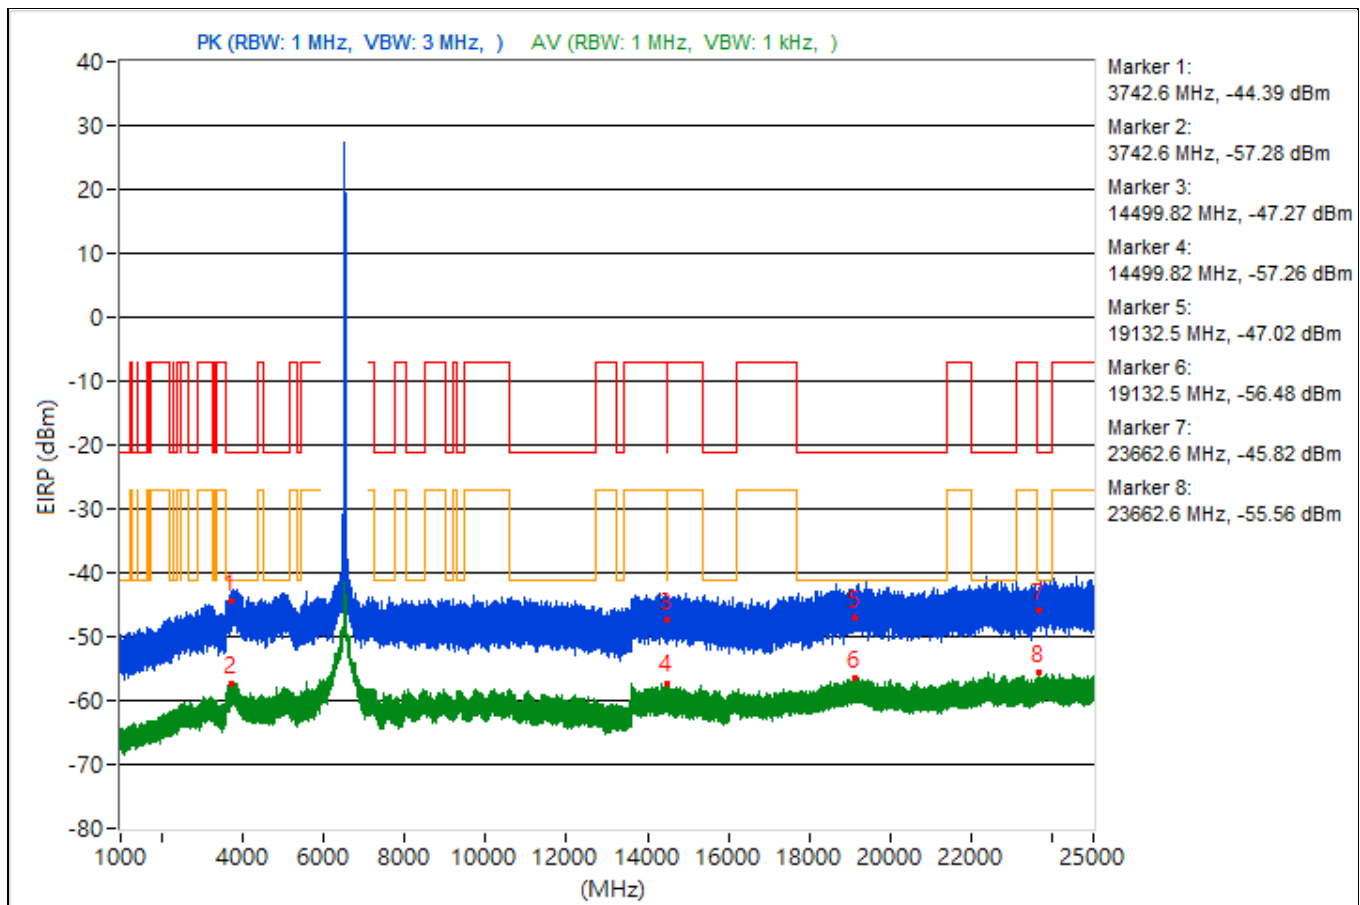


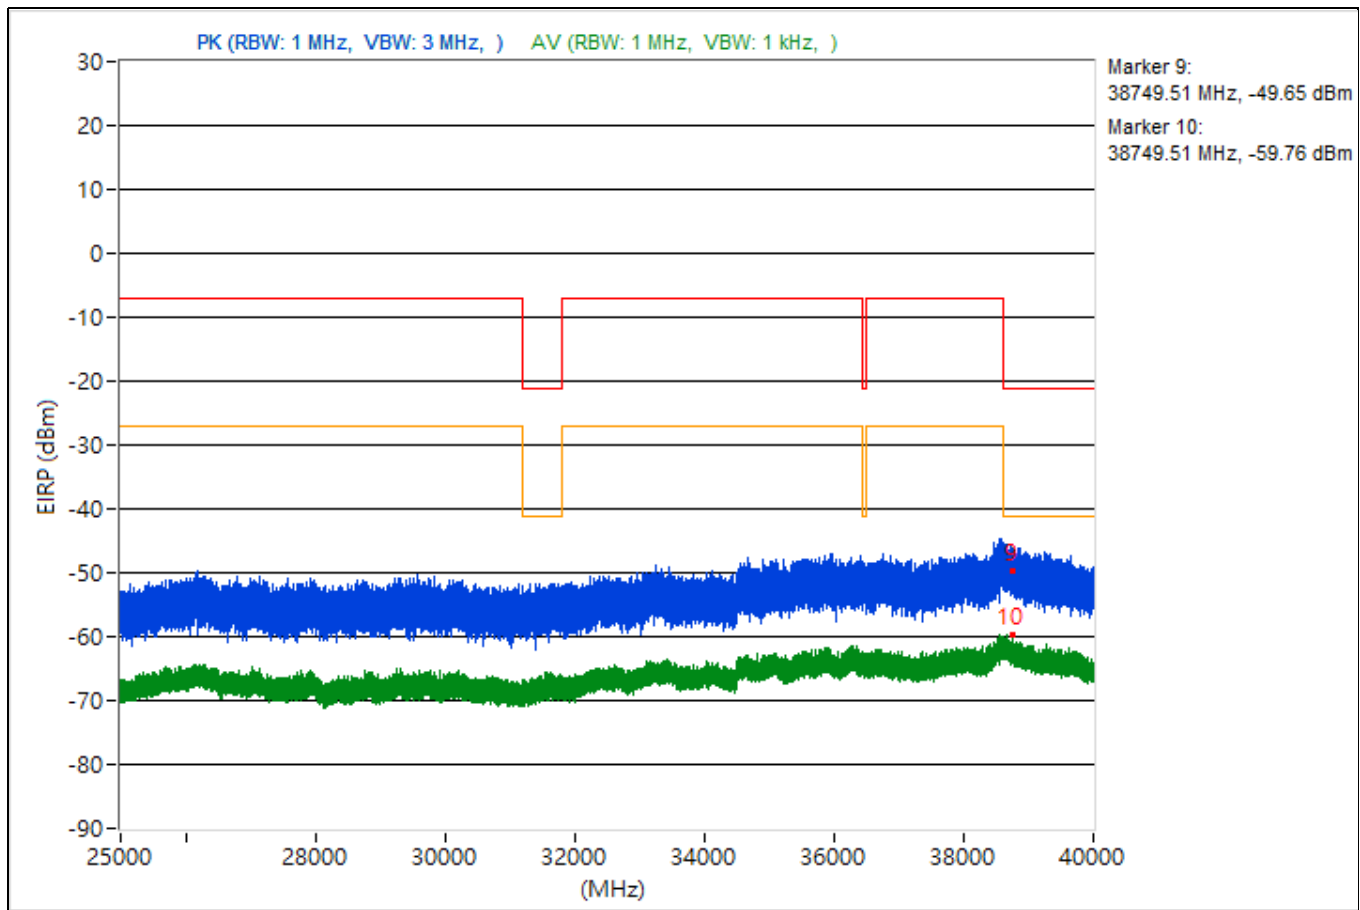


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.54	49.26 PK	74	-24.74	-54.64	-53.33	4.92	-46
2	3772.54	38.27 AV	54	-15.73	-65.4	-64.49	4.92	-56.99
3	15368.71	48.33 PK	74	-25.67	-54.94	-54.79	4.92	-46.93
4	15368.71	37.31 AV	54	-16.69	-67.35	-64.79	4.92	-57.95
5	19208.1	51.61 PK	74	-22.39	-50.48	-53.06	4.92	-43.65
6	19208.1	38.76 AV	54	-15.24	-63.72	-65.27	4.92	-56.5
7	23806.5	51.59 PK	74	-22.41	-52.72	-50.71	4.92	-43.67
8	23806.5	39.56 AV	54	-14.44	-64.76	-62.73	4.92	-55.7
9	38646.49	46.33 PK	74	-27.67	-54.6	-61.87	4.92	-48.93
10	38646.49	36 AV	54	-18	-66.49	-68.03	4.92	-59.26

Note: Margin value = Emission Level - Limit value

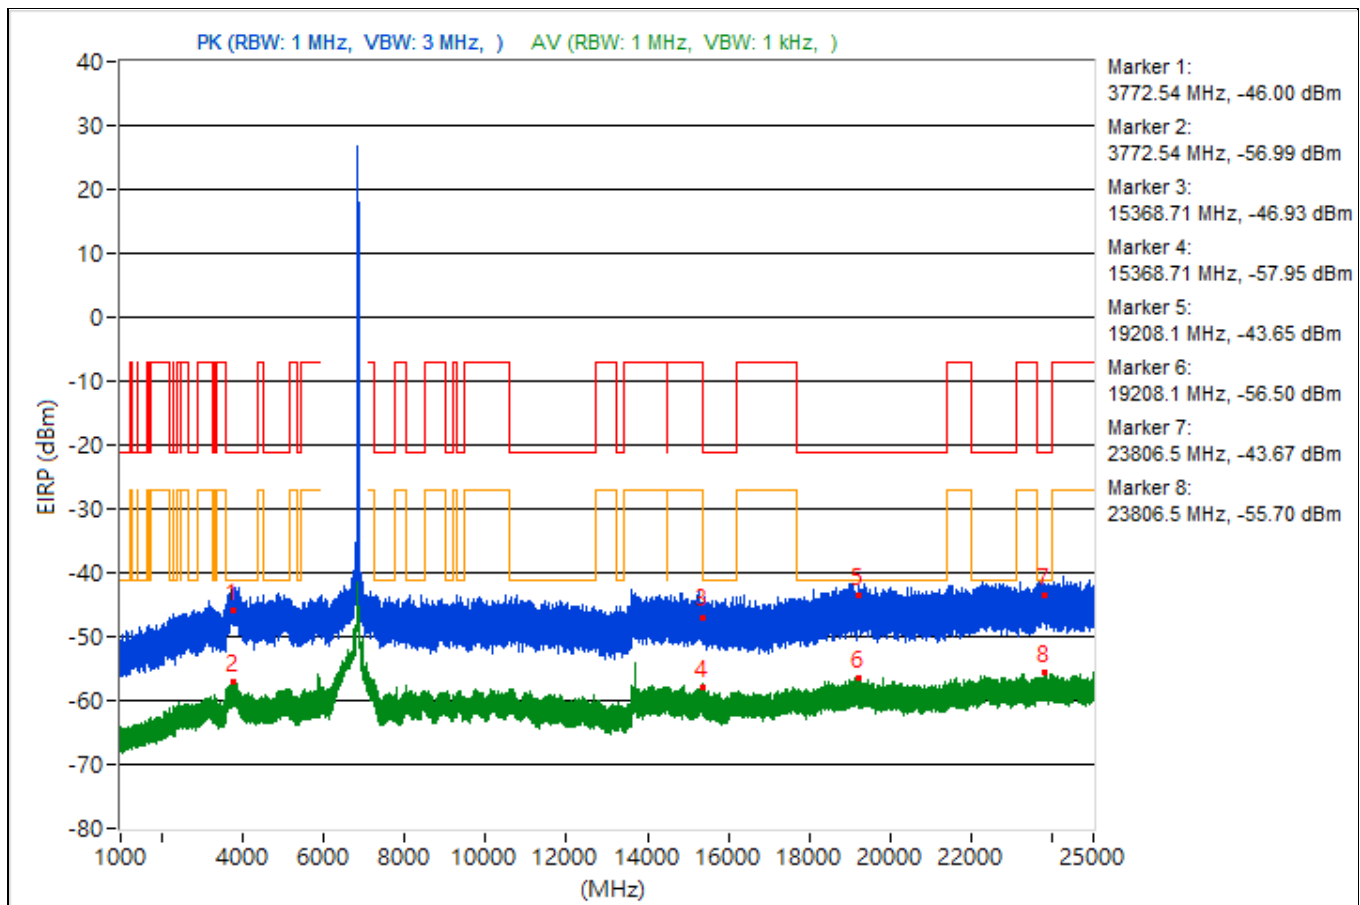


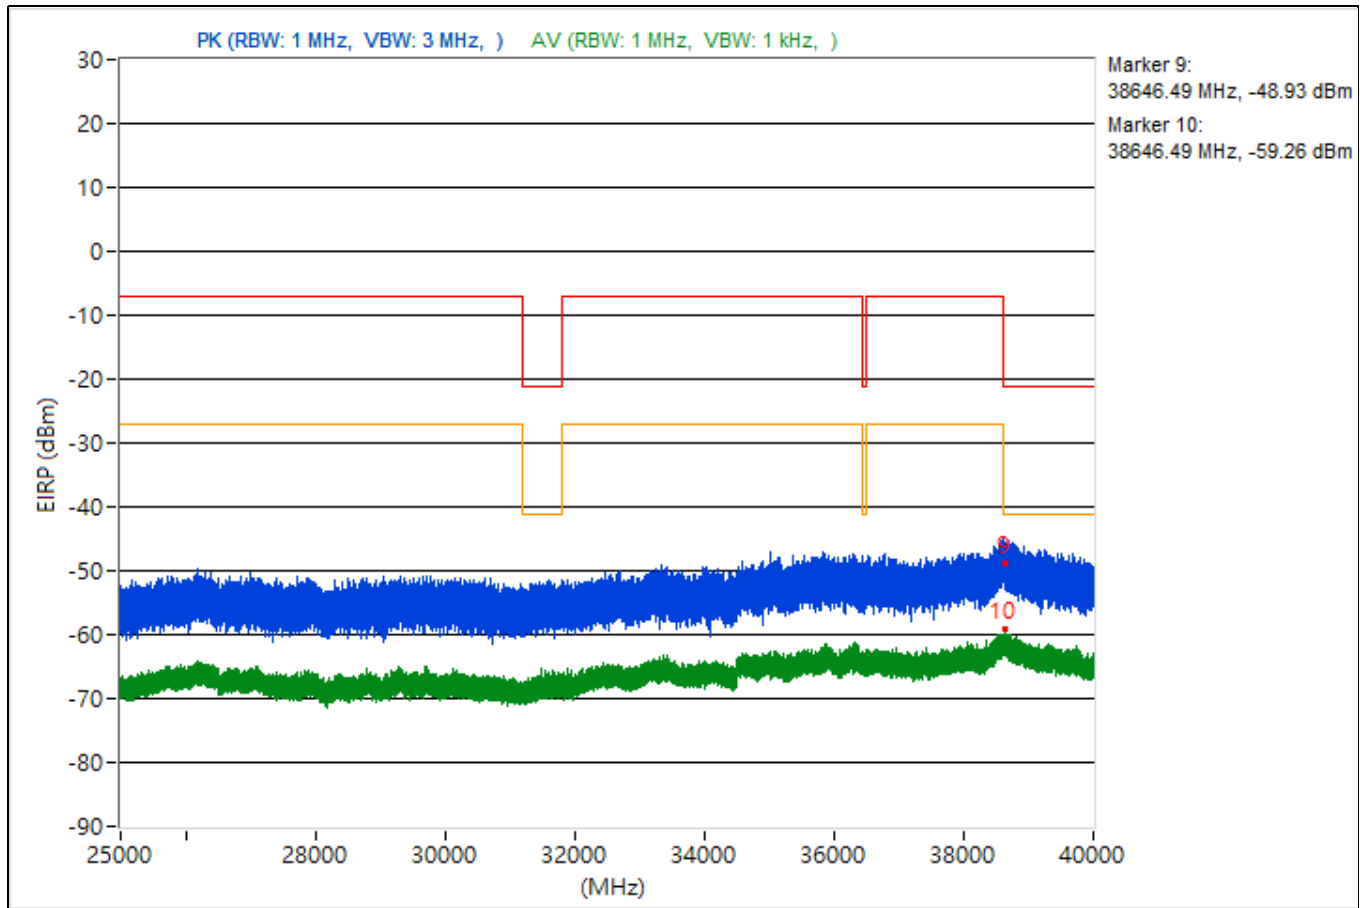


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.82	51.38 PK	74	-22.62	-55.88	-49.74	4.92	-43.88
2	3804.82	38.21 AV	54	-15.79	-64.18	-65.97	4.92	-57.05
3	14473.42	47.43 PK	74	-26.57	-54.46	-57.62	4.92	-47.83
4	14473.42	37.12 AV	54	-16.88	-67.48	-65.01	4.92	-58.14
5	19274.3	49.14 PK	74	-24.86	-55.71	-52.86	4.92	-46.12
6	19274.3	38.18 AV	54	-15.82	-66.79	-63.75	4.92	-57.08
7	22418.8	49.59 PK	74	-24.41	-55.05	-52.51	4.92	-45.67
8	22418.8	39.11 AV	54	-14.89	-63.48	-64.76	4.92	-56.15
9	38601.6	47.77 PK	74	-26.23	-56.83	-54.36	4.92	-47.49
10	38601.6	35.27 AV	54	-18.73	-66.53	-69.98	4.92	-59.99

Note: Margin value = Emission Level - Limit value

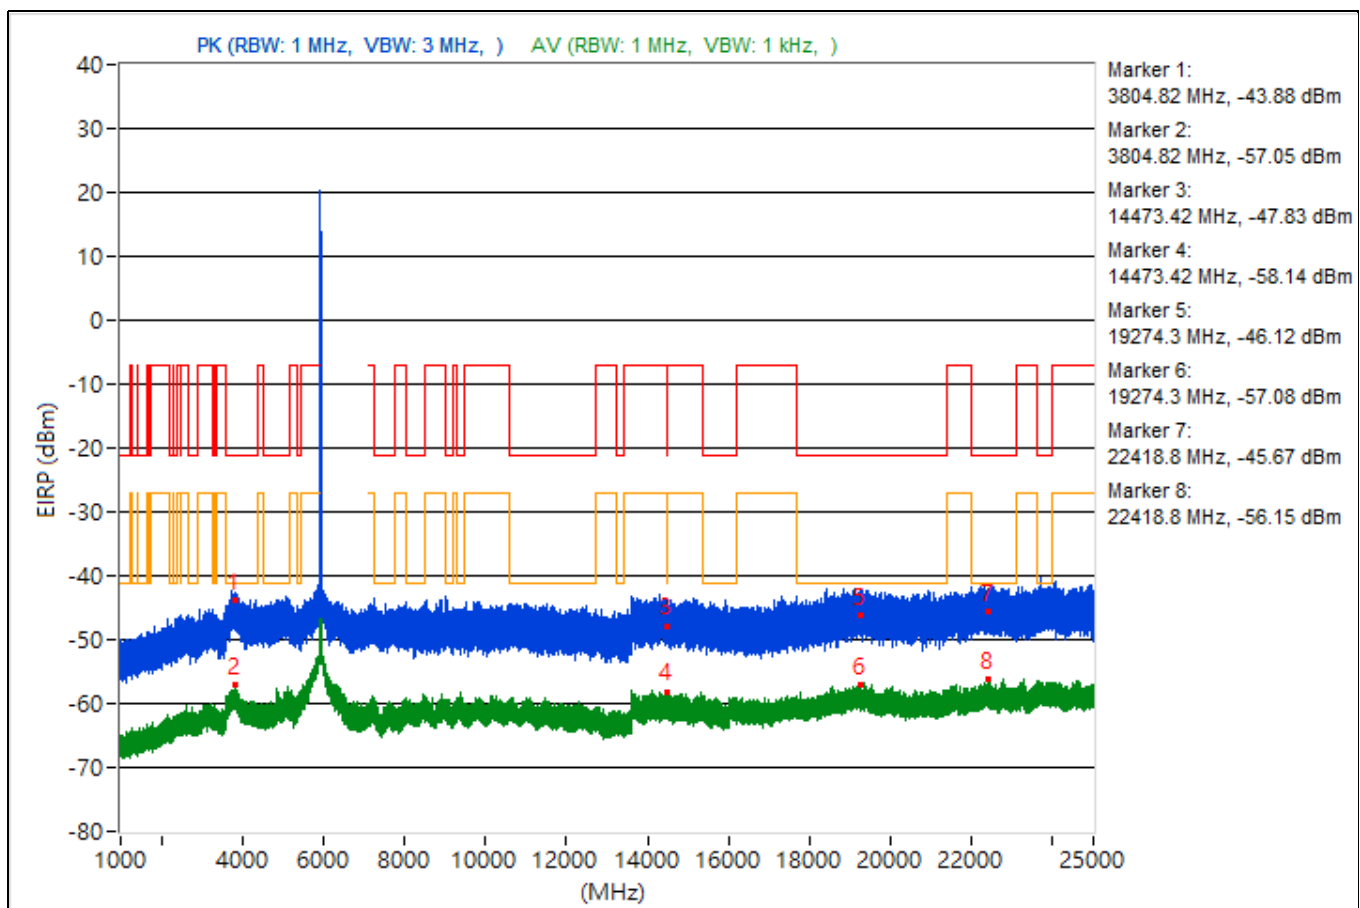


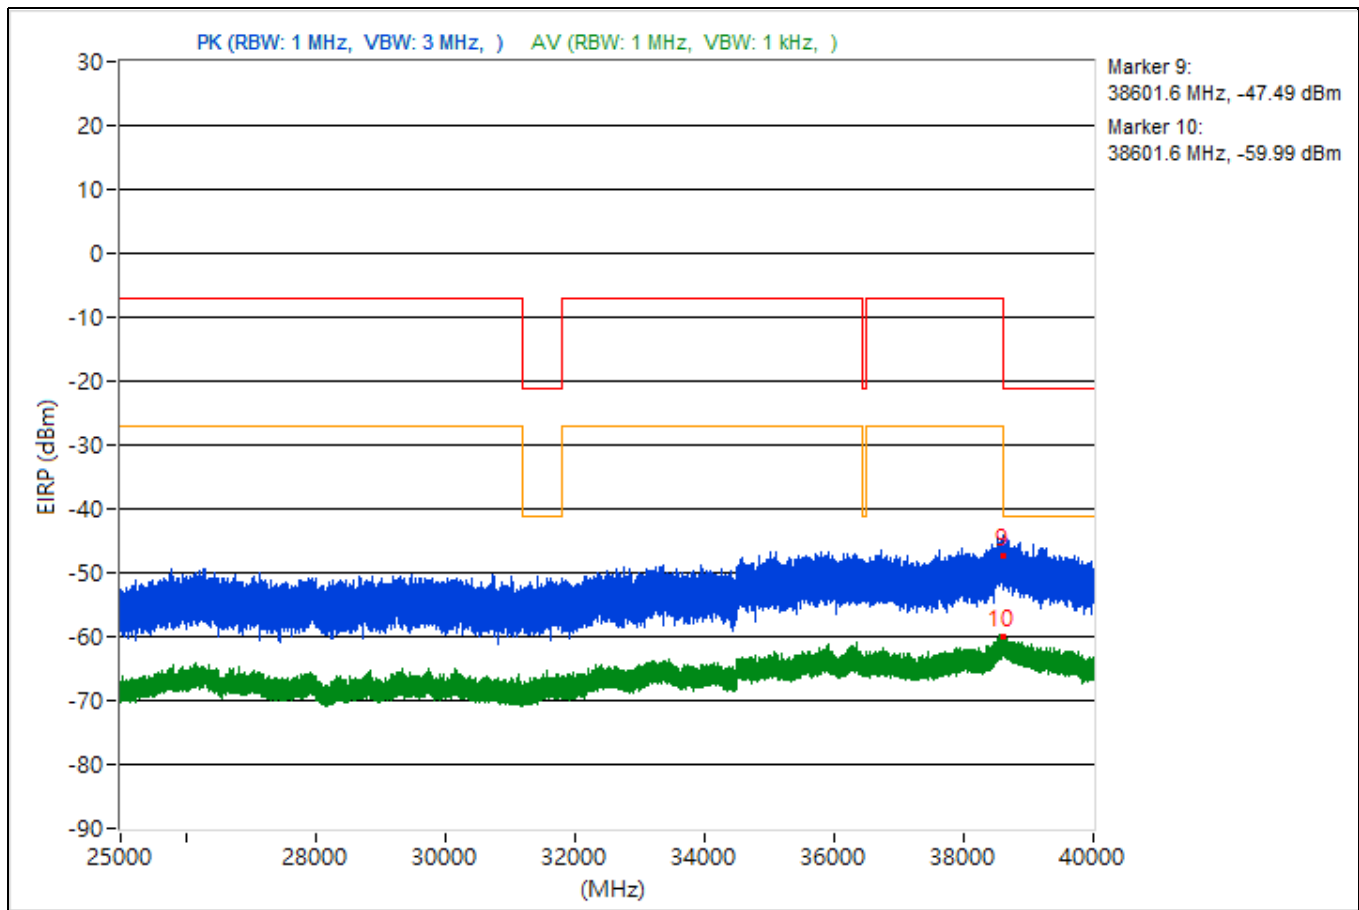


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.37	50.8 PK	74	-23.2	-52.81	-52.01	4.92	-44.46
2	3812.37	38.51 AV	54	-15.49	-65.84	-63.76	4.92	-56.75
3	14480.27	48.88 PK	74	-25.12	-56.45	-52.88	4.92	-46.38
4	14480.27	37.4 AV	54	-16.6	-64.93	-66.85	4.92	-57.86
5	19431.9	49.49 PK	74	-24.51	-53.67	-53.72	4.92	-45.77
6	19431.9	39.16 AV	54	-14.84	-64.72	-63.45	4.92	-56.1
7	23935.3	50.93 PK	74	-23.07	-51.46	-53.24	4.92	-44.33
8	23935.3	40.78 AV	54	-13.22	-63.4	-61.61	4.92	-54.48
9	38602.22	47.79 PK	74	-26.21	-55.52	-55.29	4.92	-47.47
10	38602.22	36.41 AV	54	-17.59	-68.03	-65.81	4.92	-58.85

Note: Margin value = Emission Level - Limit value

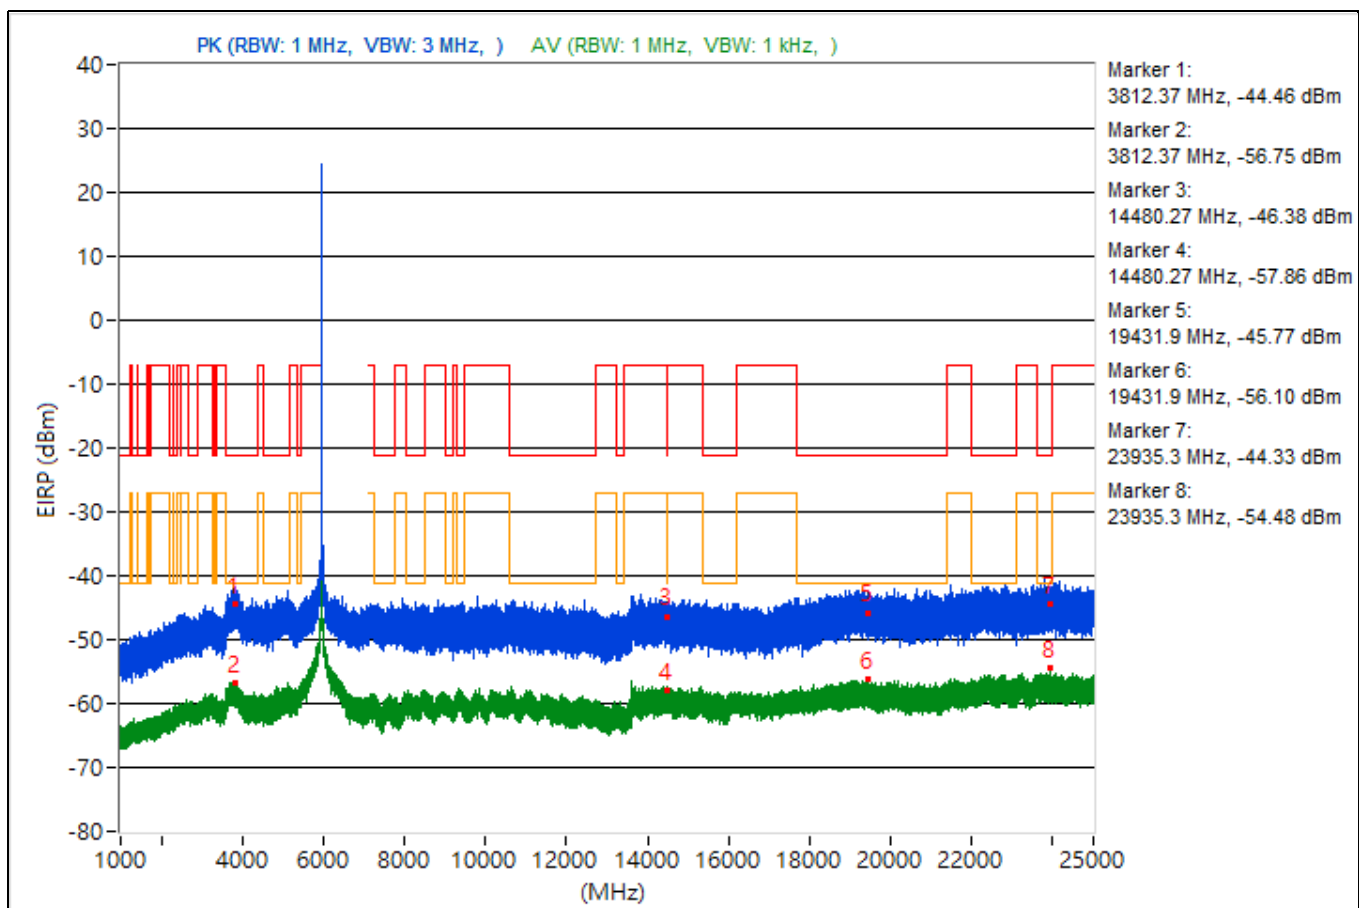


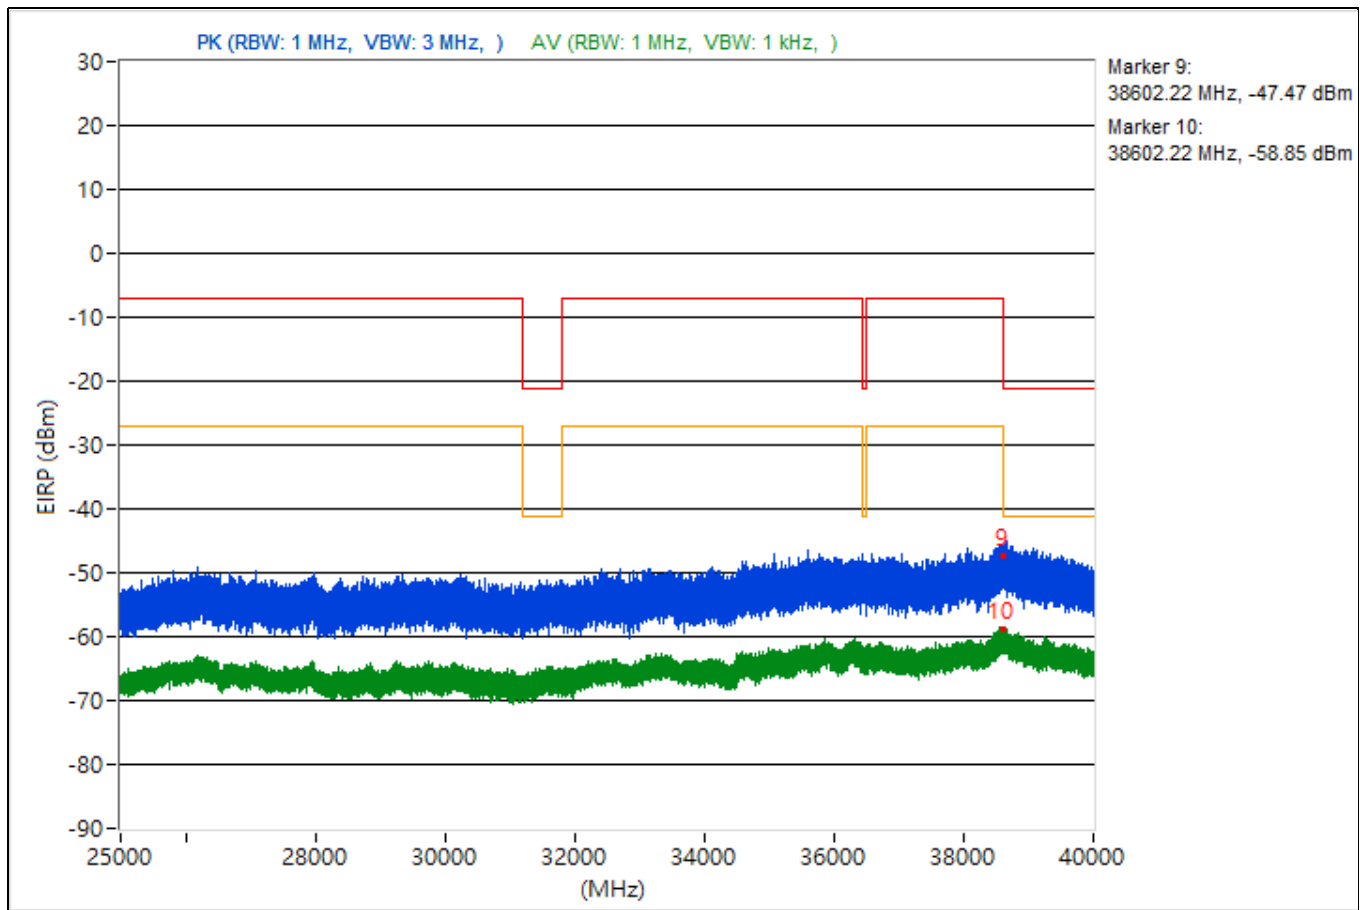


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.42	49.57 PK	74	-24.43	-54.31	-53.02	4.92	-45.69
2	3817.42	38.89 AV	54	-15.11	-63.41	-65.41	4.92	-56.37
3	8483.56	47.68 PK	74	-26.32	-54.3	-57.18	4.92	-47.58
4	8483.56	36.97 AV	54	-17.03	-68.71	-64.65	4.92	-58.29
5	19237.1	47.63 PK	74	-26.37	-56.45	-54.82	4.92	-47.63
6	19237.1	39.16 AV	54	-14.84	-63.1	-65.22	4.92	-56.1
7	22350.6	50.16 PK	74	-23.84	-55.04	-51.67	4.92	-45.1
8	22350.6	40.1 AV	54	-13.9	-62.04	-64.46	4.92	-55.16
9	38604.36	44.51 PK	74	-29.49	-60	-57.67	4.92	-50.75
10	38604.36	36.23 AV	54	-17.77	-68.12	-66.05	4.92	-59.03

Note: Margin value = Emission Level - Limit value

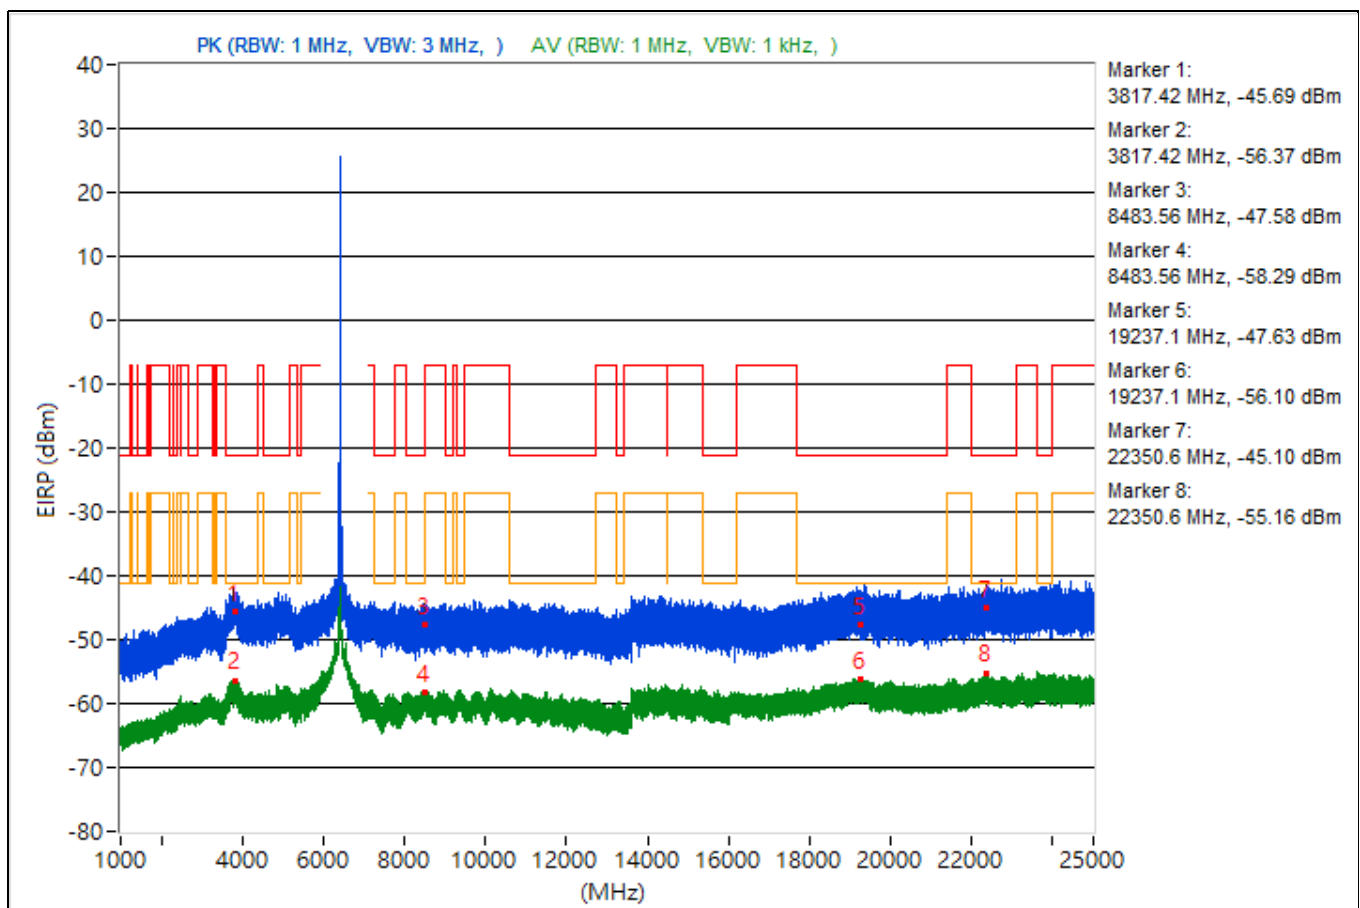


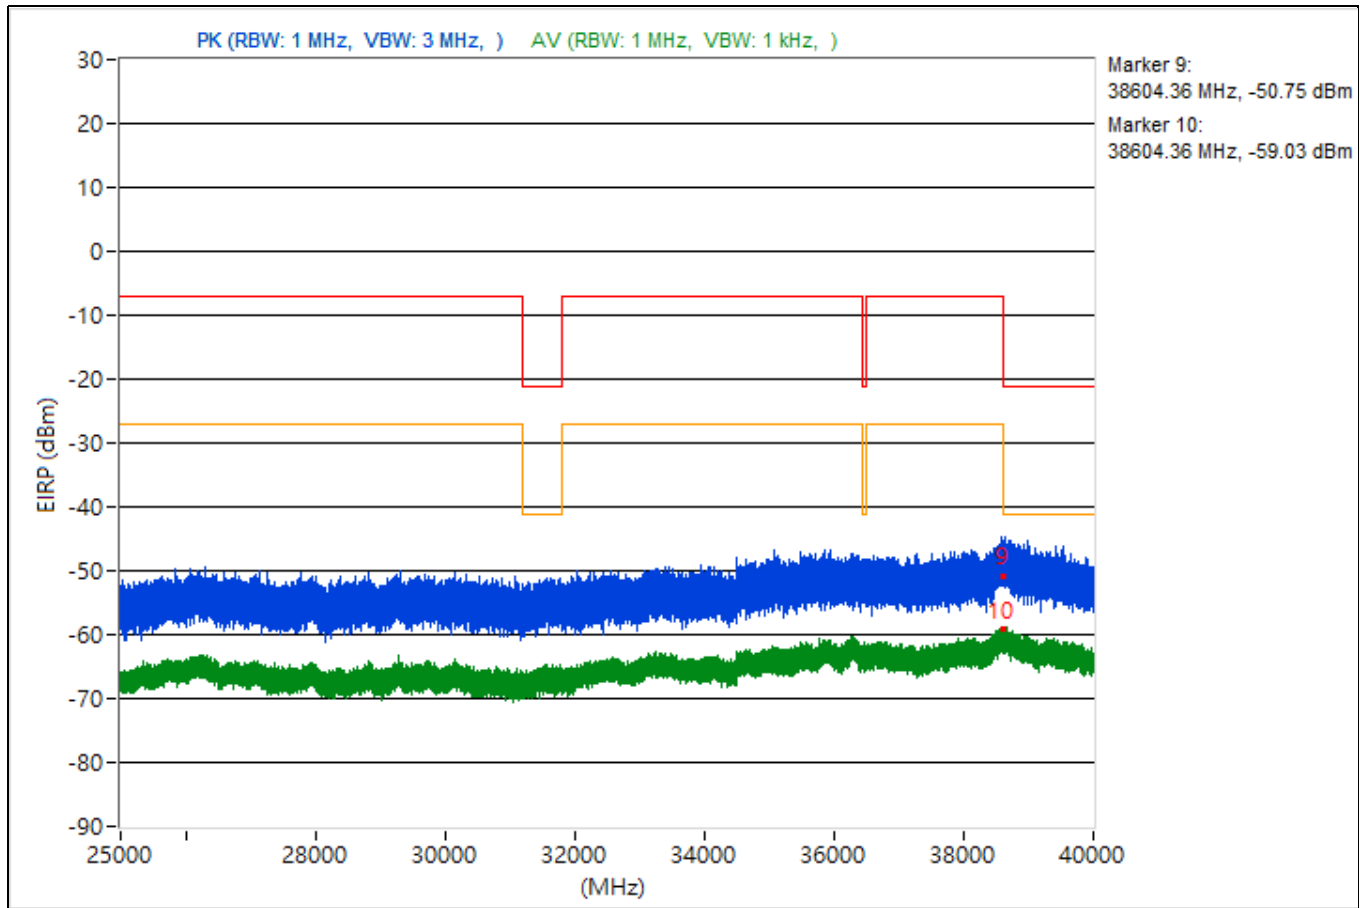


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3725.8	49.21 PK	74	-24.79	-53.8	-54.17	4.92	-46.05
2	3725.8	37.58 AV	54	-16.42	-64.1	-67.96	4.92	-57.68
3	7262.98	48.26 PK	74	-25.74	-54.06	-56.02	4.92	-47
4	7262.98	37.38 AV	54	-16.62	-65.35	-66.32	4.92	-57.88
5	20577.3	50.68 PK	74	-23.32	-51.28	-54.23	4.92	-44.58
6	20577.3	42.3 AV	54	-11.7	-60.02	-61.98	4.92	-52.96
7	23728.1	51.09 PK	74	-22.91	-51.97	-52.23	4.92	-44.17
8	23728.1	39.16 AV	54	-14.84	-66.34	-62.54	4.92	-56.1
9	38685.24	44.35 PK	74	-29.65	-59.03	-58.65	4.92	-50.91
10	38685.24	34.94 AV	54	-19.06	-67.06	-69.89	4.92	-60.32

Note: Margin value = Emission Level - Limit value

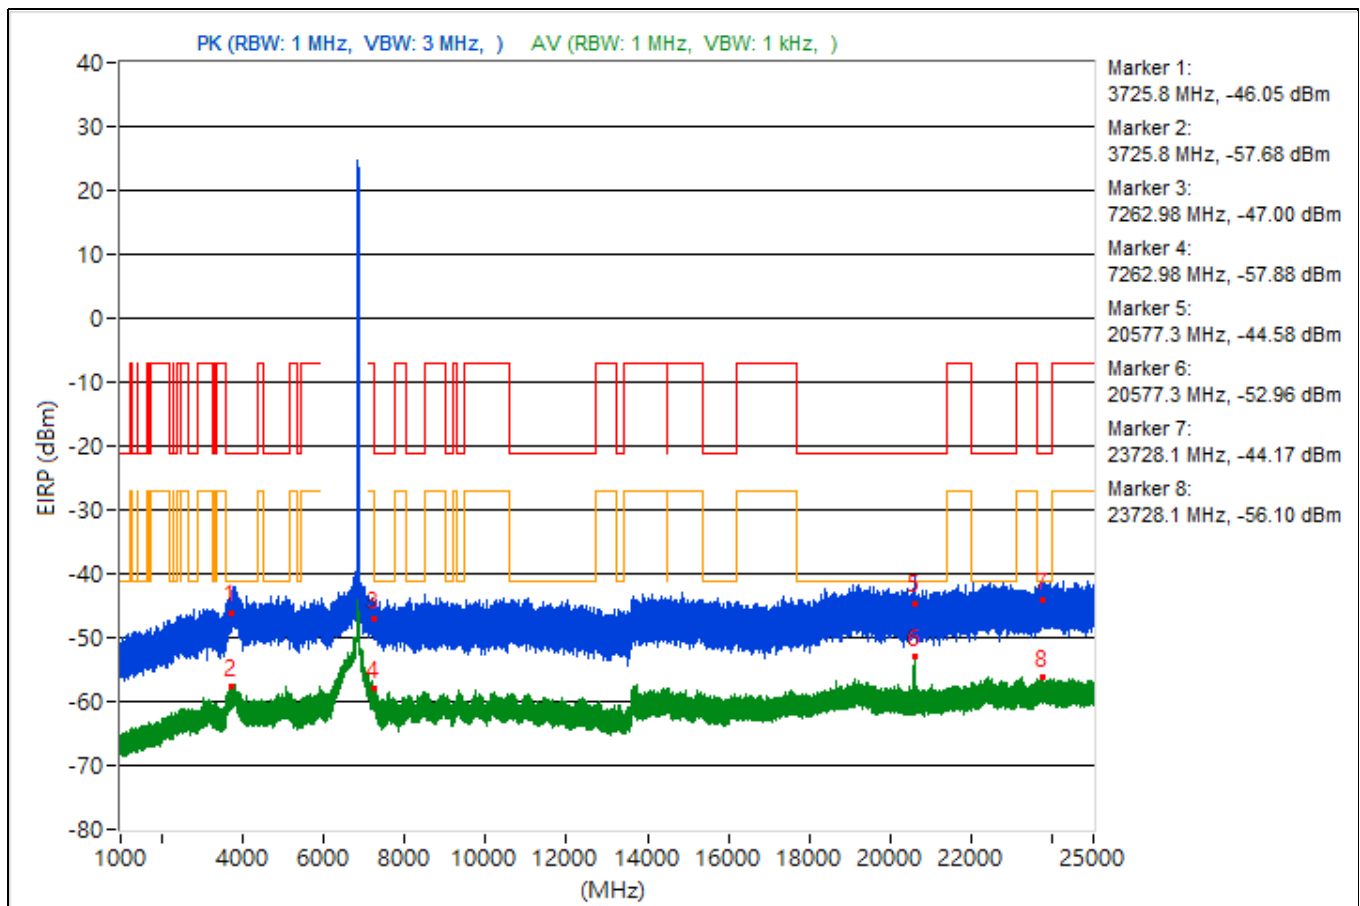


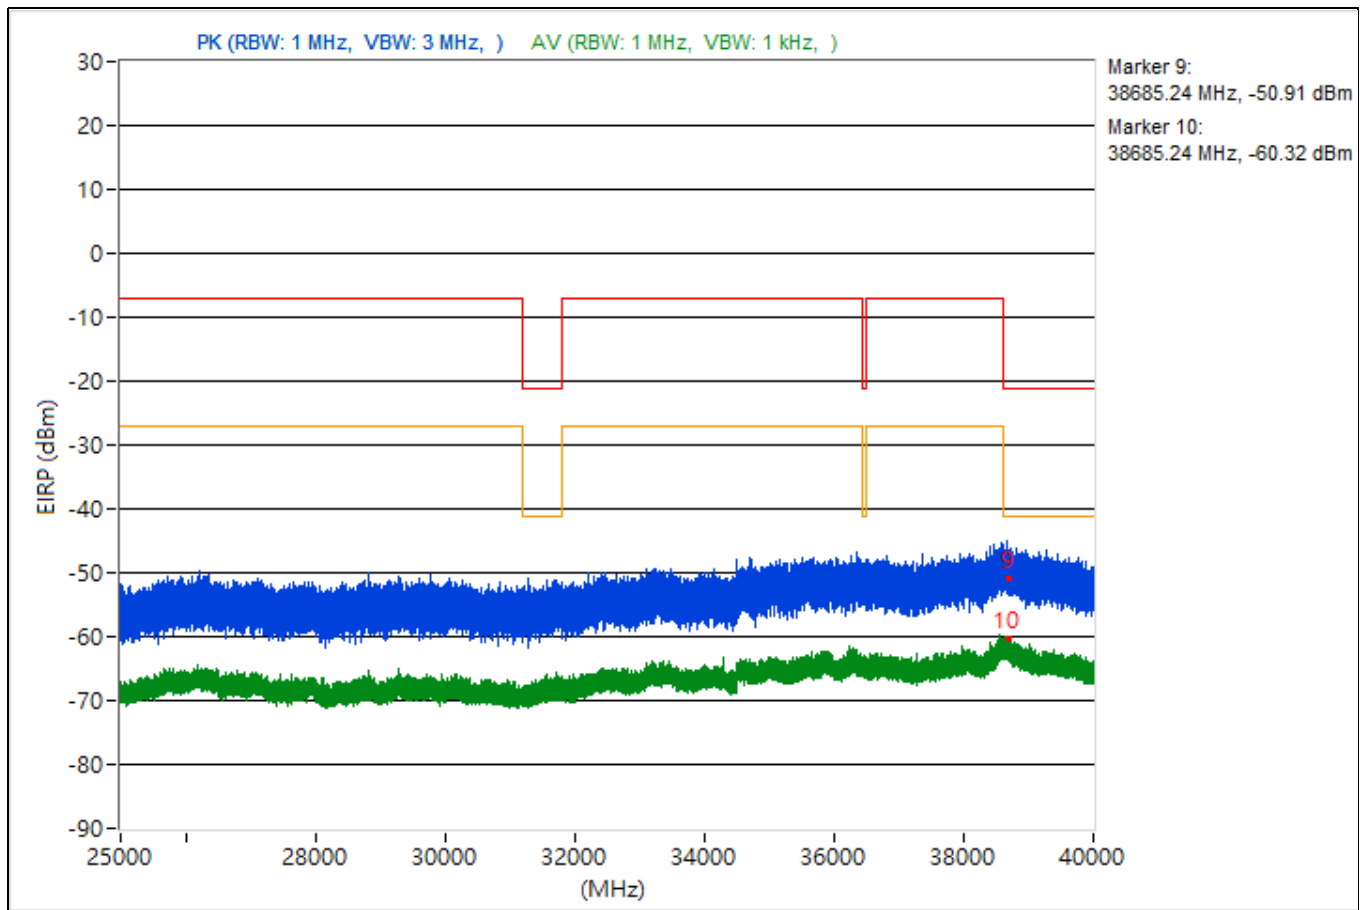


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3755.43	50.21 PK	74	-23.79	-52.8	-53.17	4.92	-45.05
2	3755.43	39.29 AV	54	-14.71	-64.85	-63.11	4.92	-55.97
3	7255.36	48.64 PK	74	-25.36	-56.97	-53.01	4.92	-46.62
4	7255.36	38.07 AV	54	-15.93	-64.23	-66.24	4.92	-57.19
5	19345.9	48.36 PK	74	-25.64	-56.94	-53.42	4.92	-46.9
6	19345.9	38.7 AV	54	-15.3	-62.96	-66.87	4.92	-56.56
7	23700.6	48.85 PK	74	-25.15	-54.15	-54.53	4.92	-46.41
8	23700.6	40.27 AV	54	-13.73	-62.26	-63.69	4.92	-54.99
9	38616.53	46 PK	74	-28	-56.9	-57.51	4.92	-49.26
10	38616.53	36.87 AV	54	-17.13	-67.03	-65.7	4.92	-58.39

Note: Margin value = Emission Level - Limit value

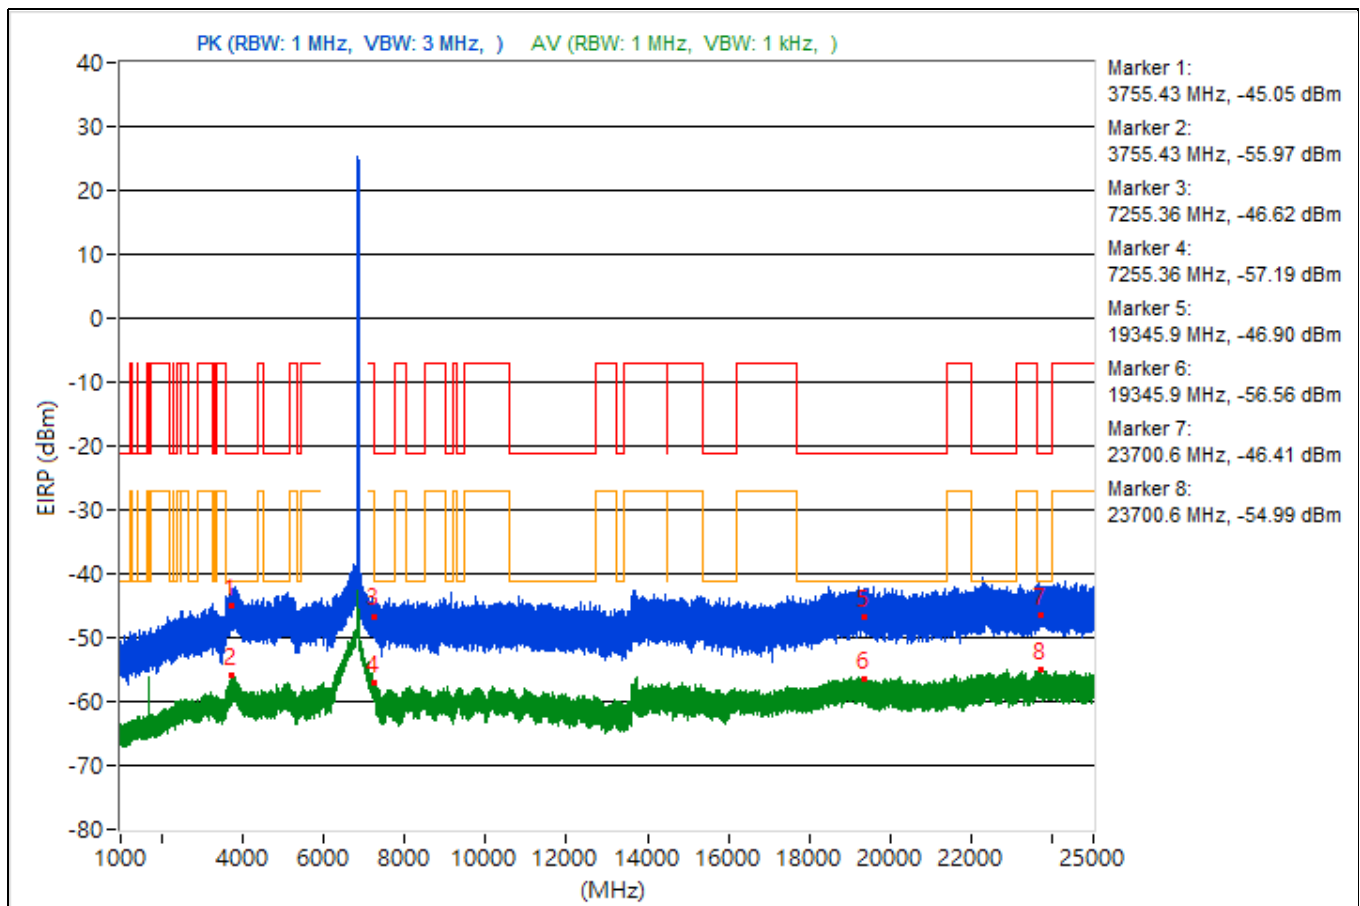


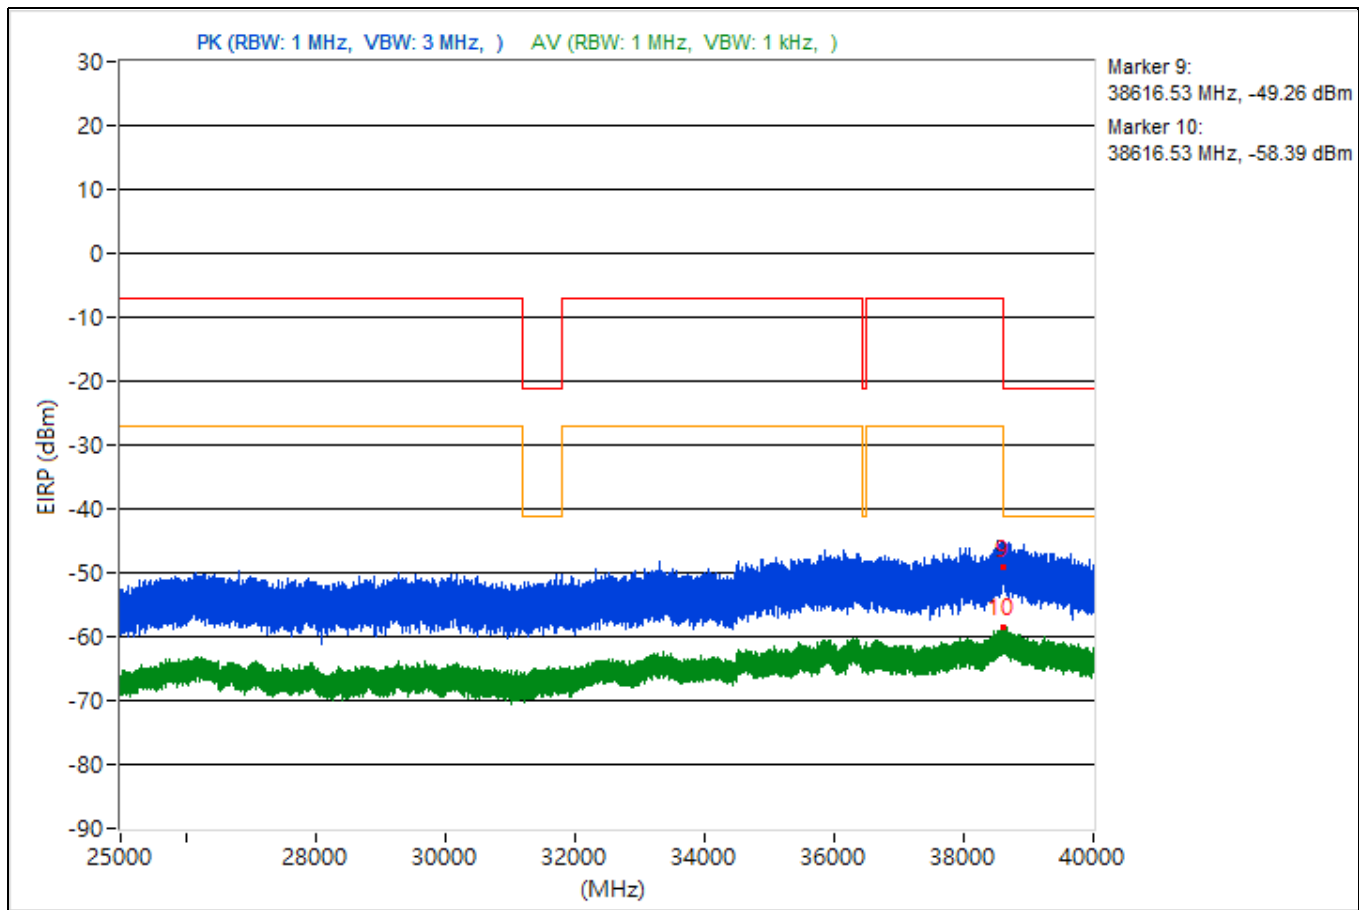


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.29	46.9 PK	74	-27.1	-56.18	-56.4	4.92	-48.36
2	3742.29	38.53 AV	54	-15.47	-63.5	-66.26	4.92	-56.73
3	14490.4	50.52 PK	74	-23.48	-51.69	-53.94	4.92	-44.74
4	14490.4	38.26 AV	54	-15.74	-65.8	-64.21	4.92	-57
5	19209	49.03 PK	74	-24.97	-54.33	-54	4.92	-46.23
6	19209	39.52 AV	54	-14.48	-64.91	-62.71	4.92	-55.74
7	23689.2	51.47 PK	74	-22.53	-53.06	-50.7	4.92	-43.79
8	23689.2	40 AV	54	-14	-65.11	-61.87	4.92	-55.26
9	38615.82	47.75 PK	74	-26.25	-53.68	-58.46	4.92	-47.51
10	38615.82	36.88 AV	54	-17.12	-66.75	-65.92	4.92	-58.38

Note: Margin value = Emission Level - Limit value

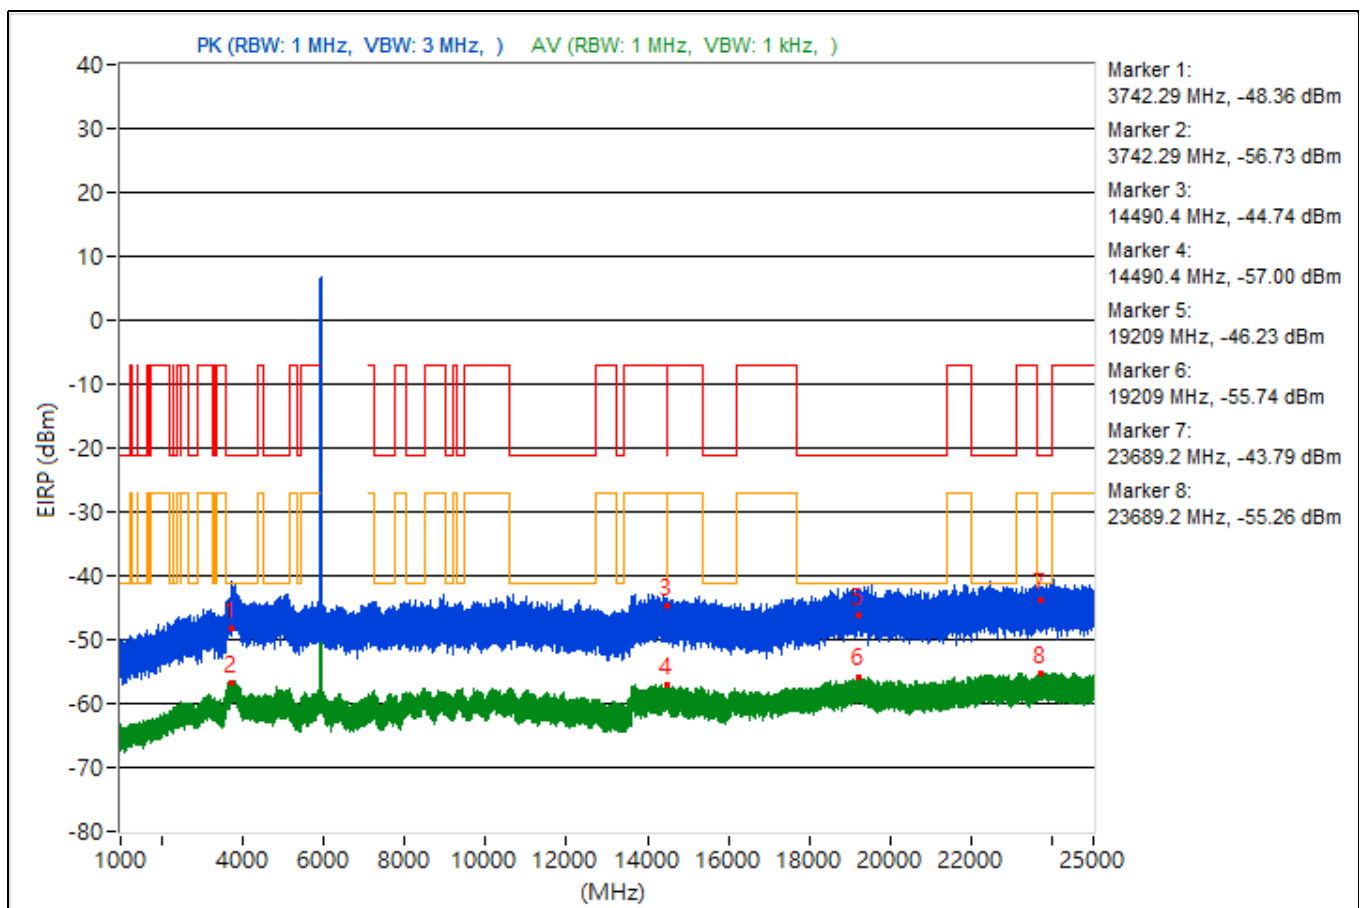


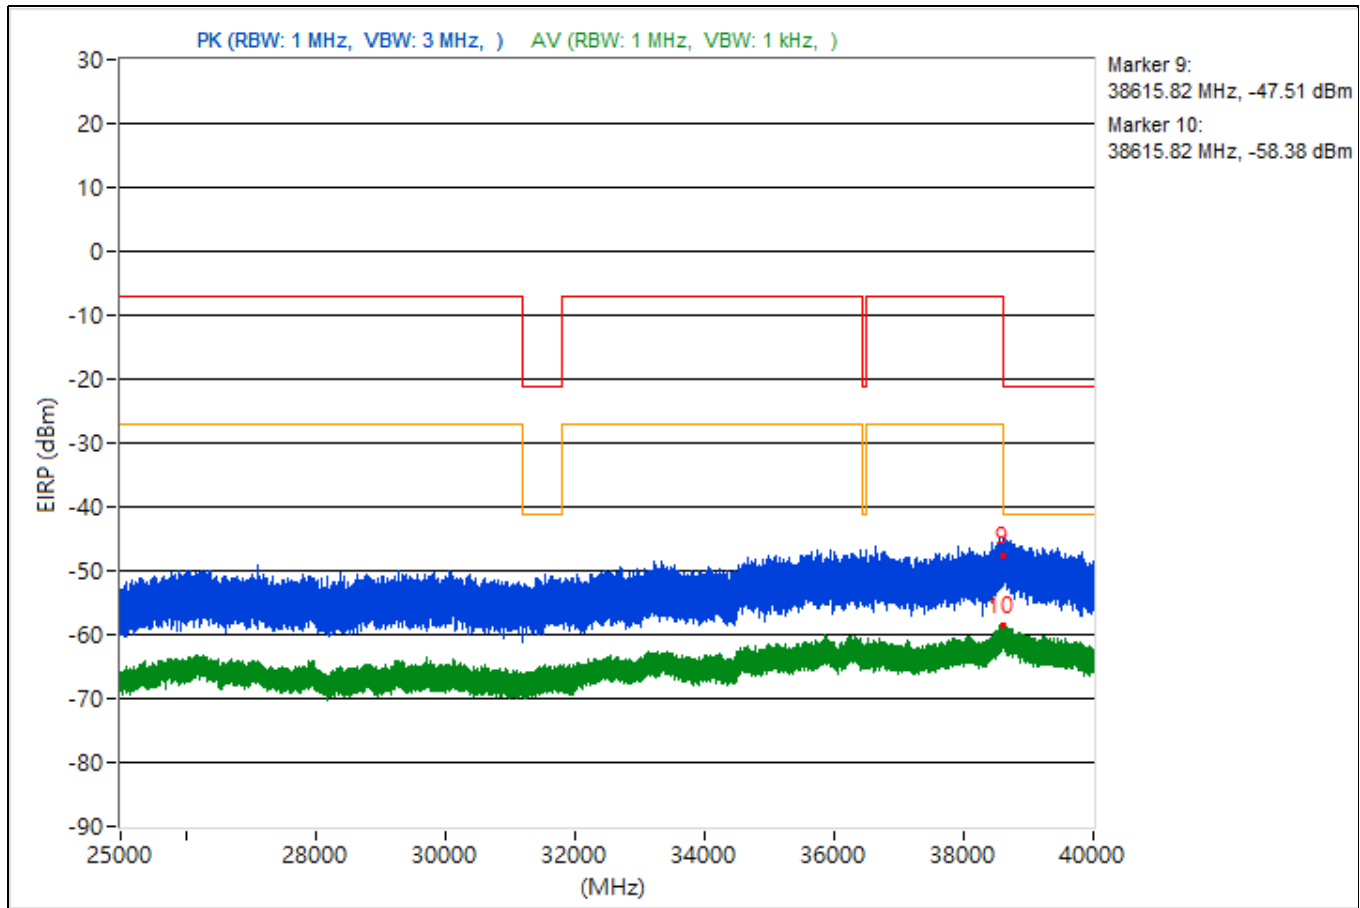


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5080.14	48.76 PK	74	-25.24	-53.78	-55.2	4.92	-46.5
2	5080.14	37.65 AV	54	-16.35	-64.87	-66.33	4.92	-57.61
3	14475.38	48.13 PK	74	-25.87	-54.28	-56.01	4.92	-47.13
4	14475.38	37.64 AV	54	-16.36	-66.42	-64.83	4.92	-57.62
5	18987.4	48.73 PK	74	-25.27	-55.05	-53.94	4.92	-46.53
6	18987.4	38.18 AV	54	-15.82	-63.63	-67.05	4.92	-57.08
7	23994.8	48.29 PK	74	-25.71	-54.71	-55.1	4.92	-46.97
8	23994.8	38.79 AV	54	-15.21	-62.79	-66.98	4.92	-56.47
9	38642.49	46.54 PK	74	-27.46	-55.73	-57.81	4.92	-48.72
10	38642.49	35.35 AV	54	-18.65	-66.37	-70.06	4.92	-59.91

Note: Margin value = Emission Level - Limit value

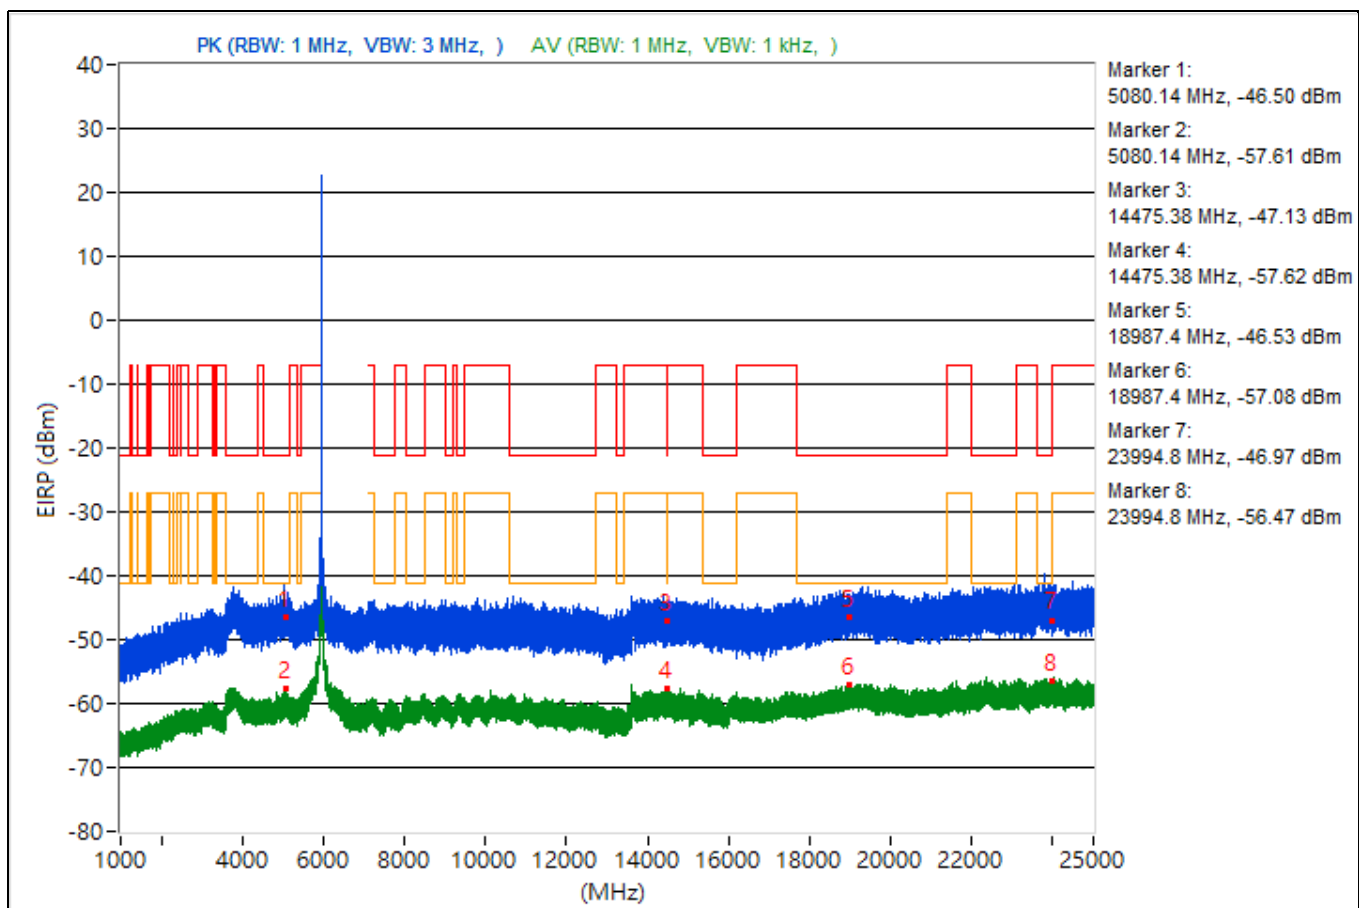


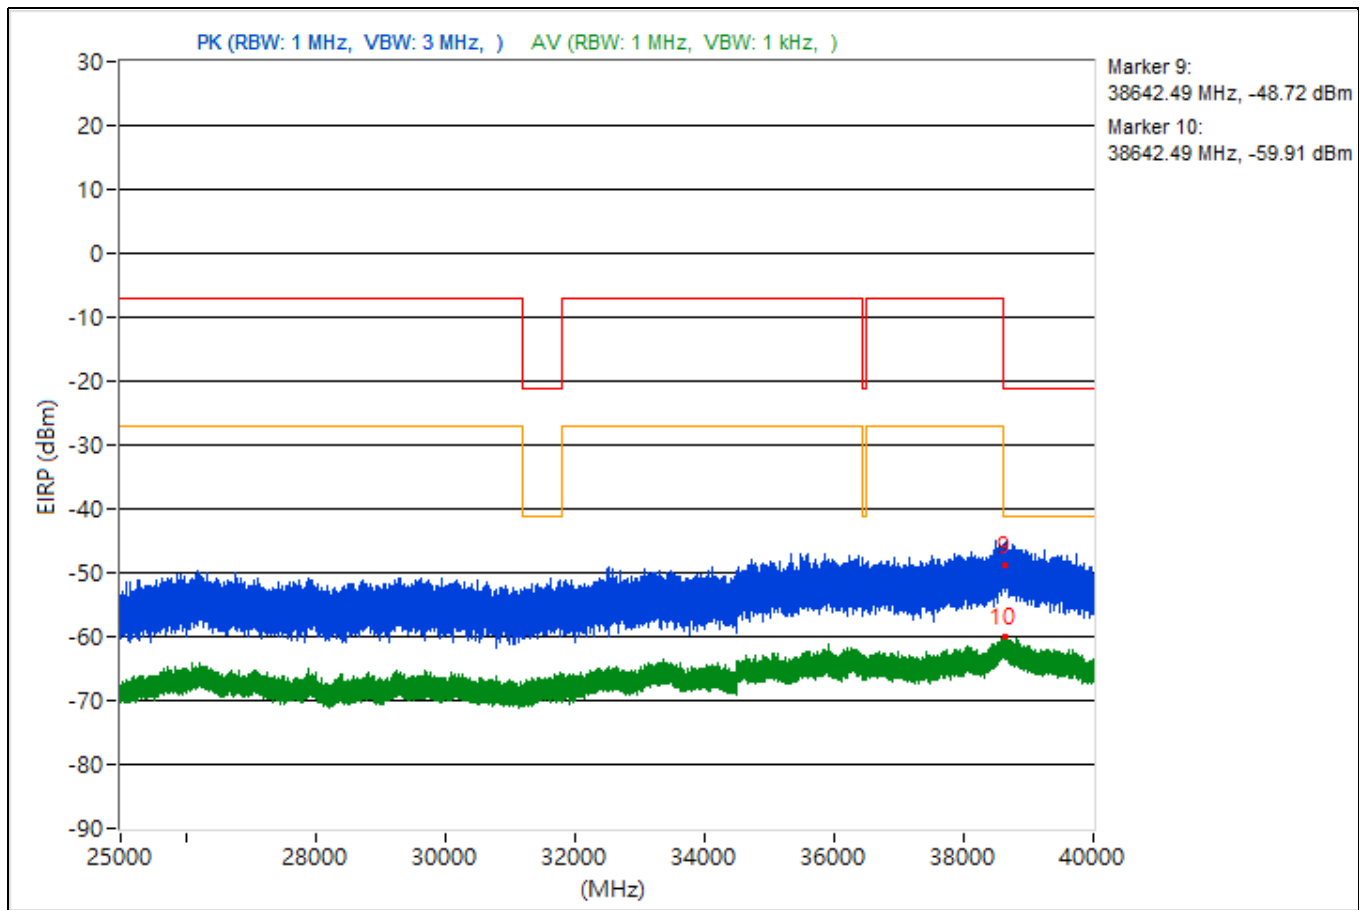


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.24	49.3 PK	74	-24.7	-56.51	-52.27	4.92	-45.96
2	5446.24	40.36 AV	54	-13.64	-63.08	-62.58	4.92	-54.9
3	8472.62	44.62 PK	74	-29.38	-59.16	-58.04	4.92	-50.64
4	8472.62	37.33 AV	54	-16.67	-67.48	-64.68	4.92	-57.93
5	18999.2	48.32 PK	74	-25.68	-55.27	-54.5	4.92	-46.94
6	18999.2	38.75 AV	54	-15.25	-65.19	-63.8	4.92	-56.51
7	22486.7	49.09 PK	74	-24.91	-52.59	-56.41	4.92	-46.17
8	22486.7	39.16 AV	54	-14.84	-65.39	-62.99	4.92	-56.1
9	38642.93	43.78 PK	74	-30.22	-59.35	-59.46	4.92	-51.48
10	38642.93	35.47 AV	54	-18.53	-69.37	-66.53	4.92	-59.79

Note: Margin value = Emission Level - Limit value

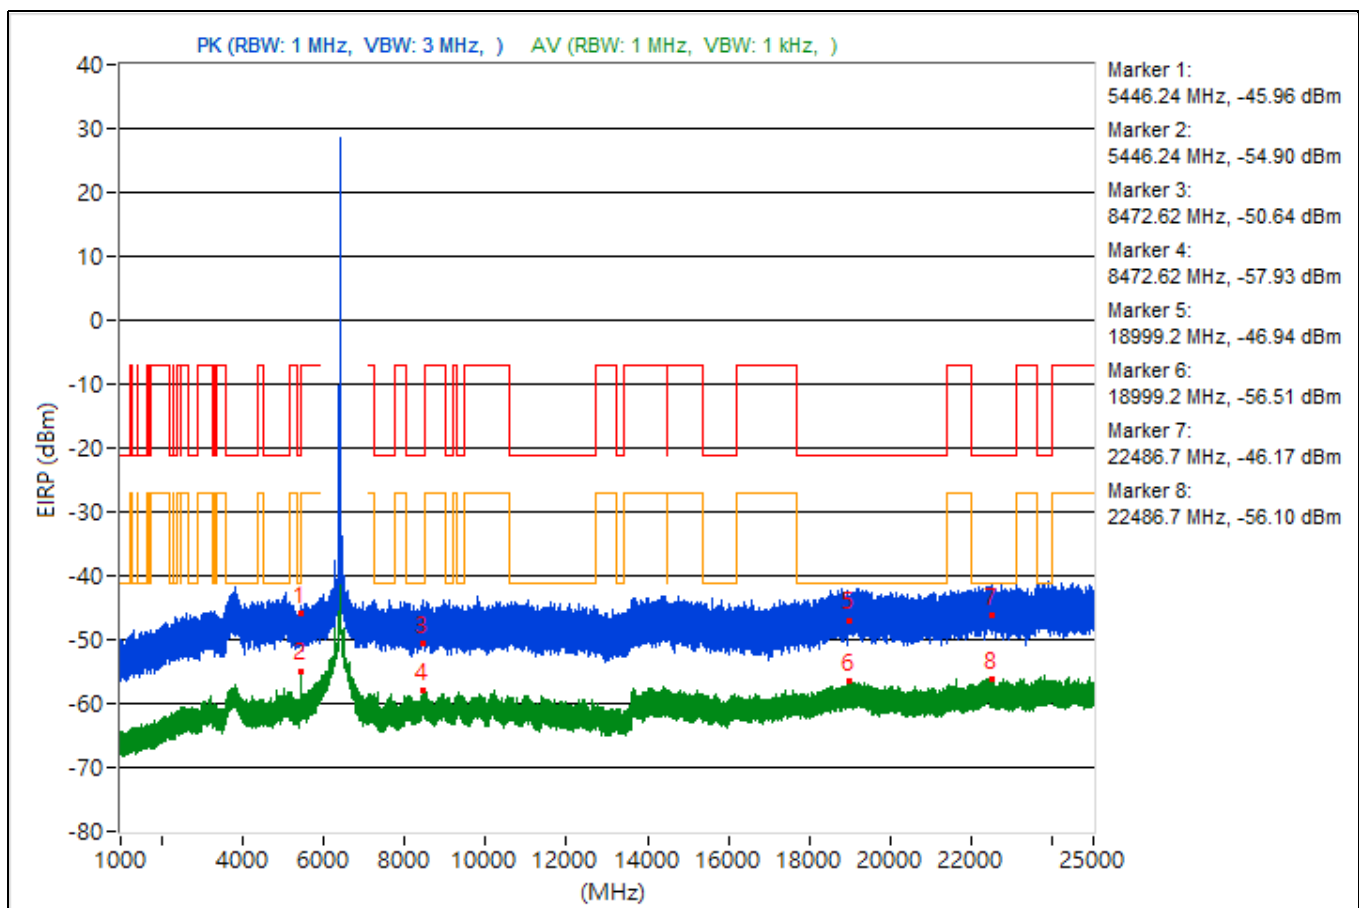


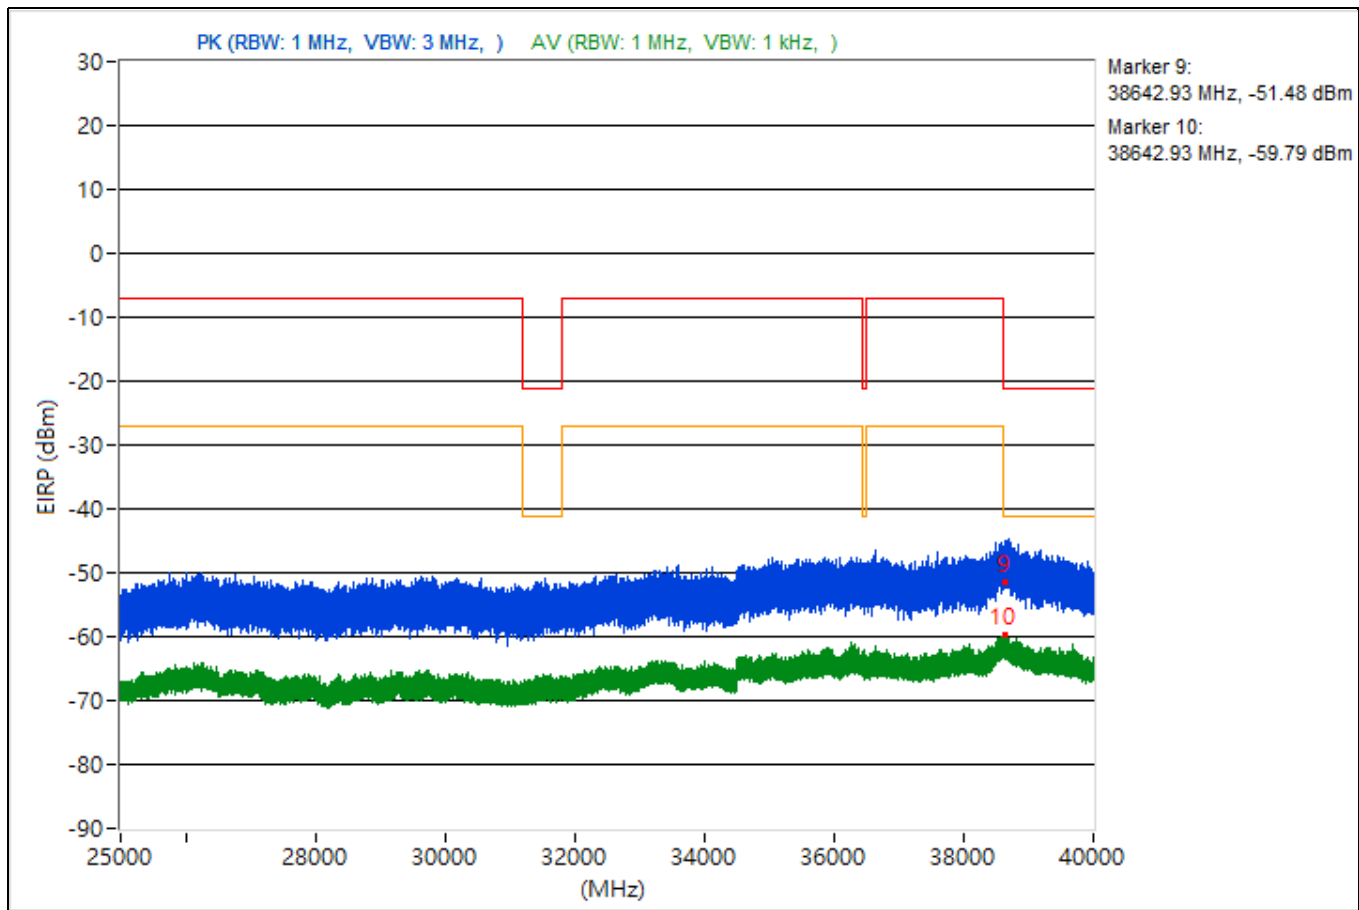


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3783.36	48.91 PK	74	-25.09	-55.09	-53.59	4.92	-46.35
2	3783.36	37.98 AV	54	-16.02	-66.03	-64.52	4.92	-57.28
3	14475.02	46.58 PK	74	-27.42	-55.87	-57.52	4.92	-48.68
4	14475.02	37.18 AV	54	-16.82	-67.4	-64.96	4.92	-58.08
5	19085.8	50.14 PK	74	-23.86	-57.89	-50.82	4.92	-45.12
6	19085.8	38.94 AV	54	-15.06	-62.78	-66.51	4.92	-56.32
7	23630.5	48.74 PK	74	-25.26	-54.13	-54.79	4.92	-46.52
8	23630.5	39.5 AV	54	-14.5	-65.09	-62.63	4.92	-55.76
9	38686.67	47.45 PK	74	-26.55	-59.75	-53.7	4.92	-47.81
10	38686.67	34.76 AV	54	-19.24	-66.83	-71	4.92	-60.5

Note: Margin value = Emission Level - Limit value

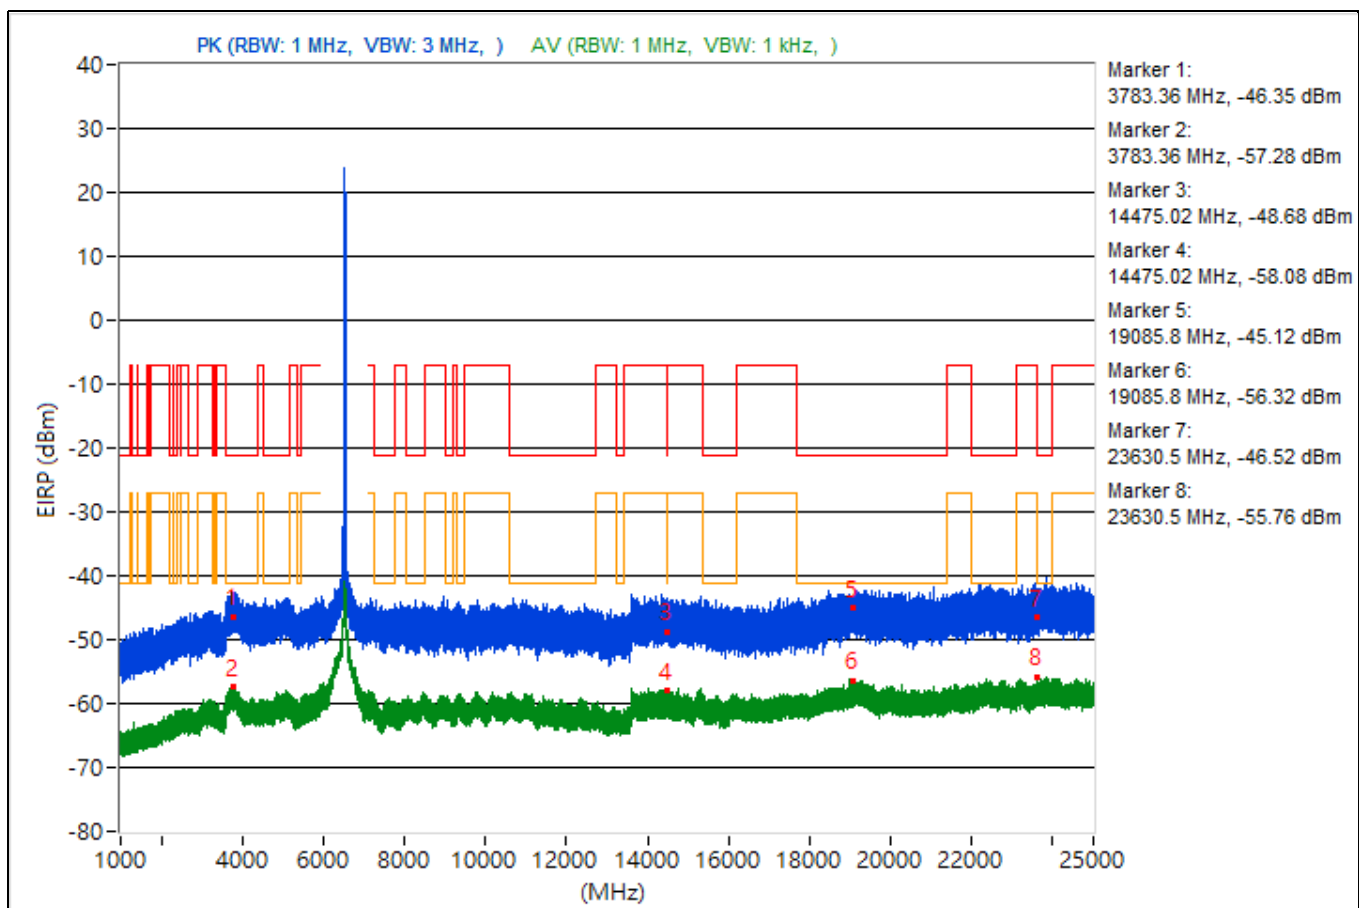


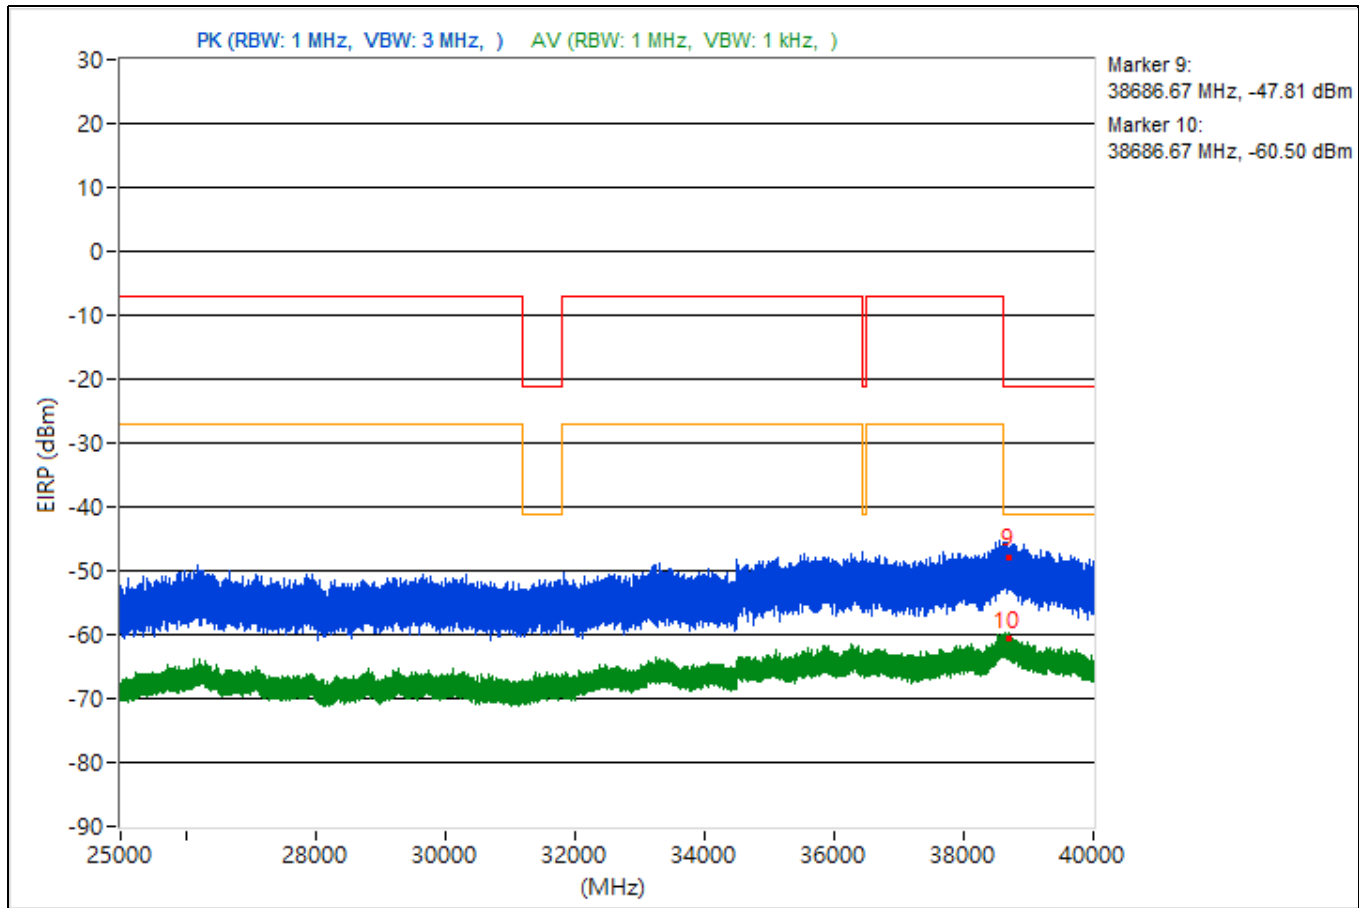


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3735.37	49.38 PK	74	-24.62	-53.94	-53.69	4.92	-45.88
2	3735.37	38.08 AV	54	-15.92	-64.54	-65.77	4.92	-57.18
3	7260.88	48.2 PK	74	-25.8	-54.61	-55.39	4.92	-47.06
4	7260.88	37.9 AV	54	-16.1	-64.51	-66.26	4.92	-57.36
5	19315.1	49.89 PK	74	-24.11	-55.57	-51.81	4.92	-45.37
6	19315.1	38.03 AV	54	-15.97	-68.48	-63.3	4.92	-57.23
7	22231.1	51.04 PK	74	-22.96	-53.17	-51.32	4.92	-44.22
8	22231.1	38.92 AV	54	-15.08	-62.82	-66.44	4.92	-56.34
9	38617.24	47.55 PK	74	-26.45	-53.91	-58.57	4.92	-47.71
10	38617.24	35.19 AV	54	-18.81	-66.52	-70.27	4.92	-60.07

Note: Margin value = Emission Level - Limit value

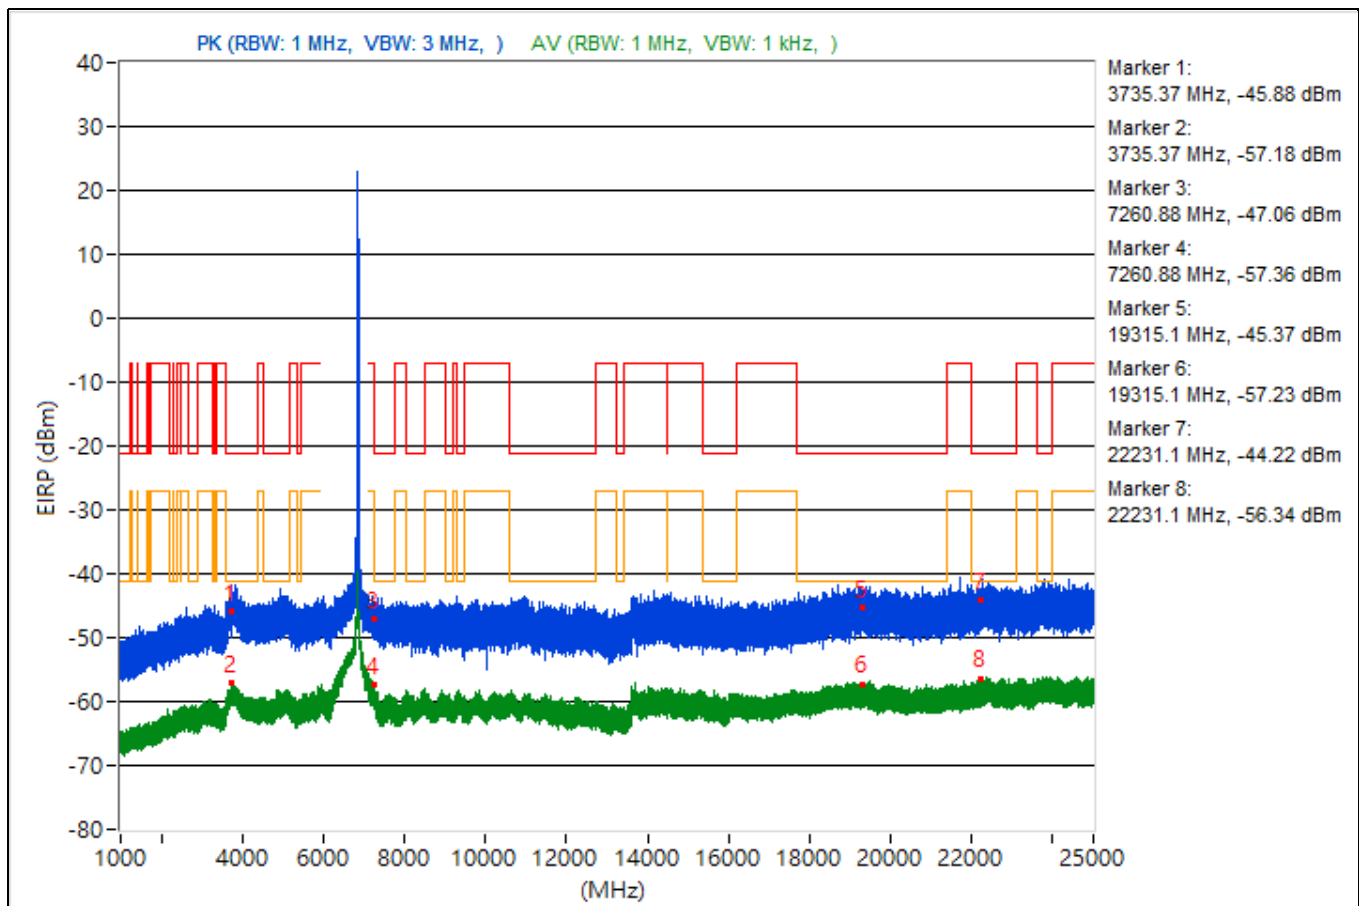


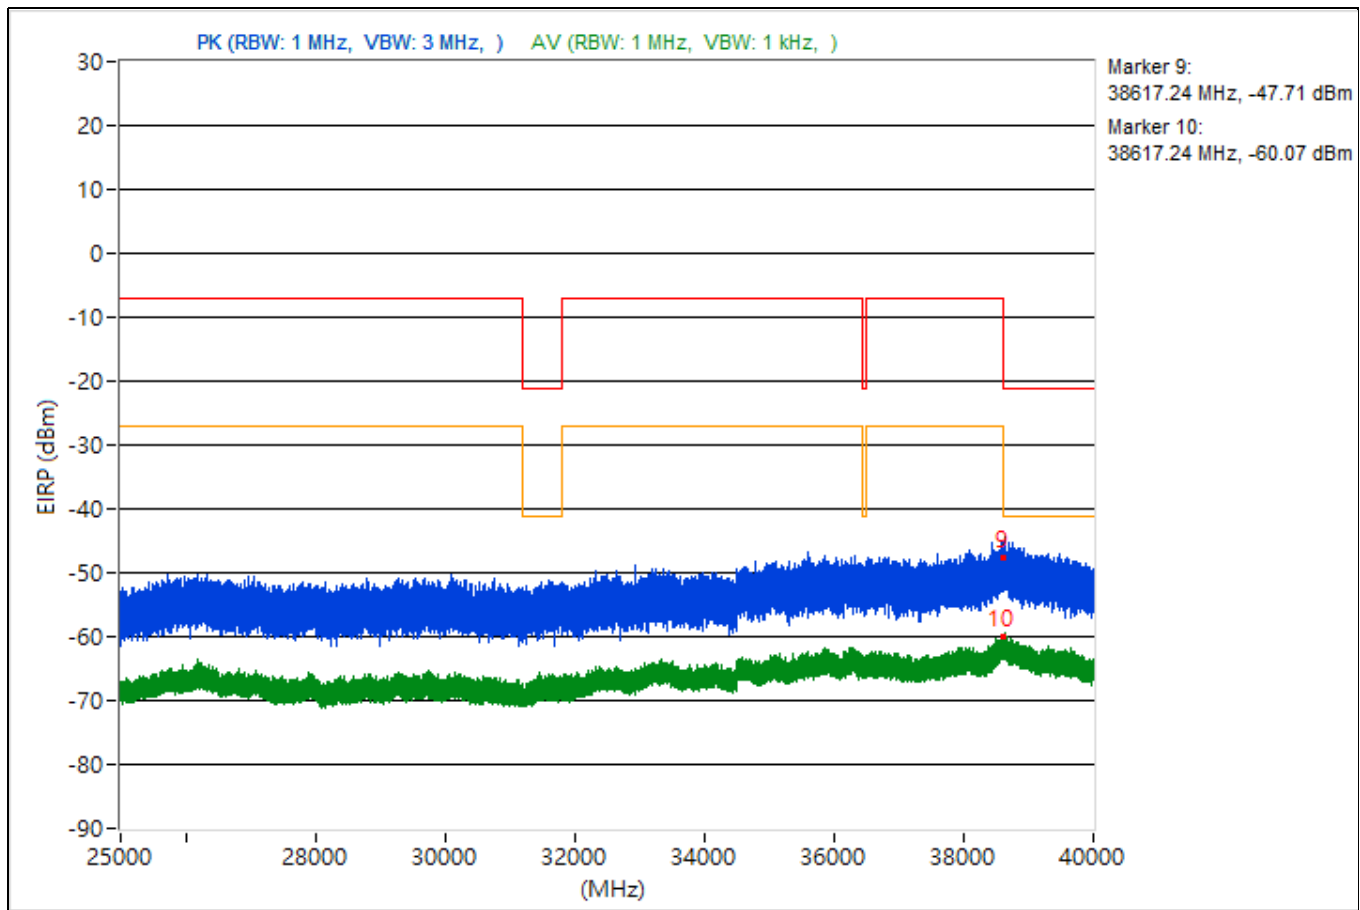


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3794.94	51 PK	74	-23	-52.51	-51.88	4.92	-44.26
2	3794.94	37.67 AV	54	-16.33	-67.17	-64.33	4.92	-57.59
3	15450.22	49.06 PK	74	-24.94	-52.39	-57.05	4.92	-46.2
4	15450.22	37.06 AV	54	-16.94	-67.86	-64.89	4.92	-58.2
5	18968.7	46.97 PK	74	-27.03	-55.88	-56.59	4.92	-48.29
6	18968.7	38.5 AV	54	-15.5	-63.39	-66.54	4.92	-56.76
7	22332.7	49.35 PK	74	-24.65	-53.95	-53.73	4.92	-45.91
8	22332.7	39.09 AV	54	-14.91	-66.57	-62.53	4.92	-56.17
9	38692	45.36 PK	74	-28.64	-57.15	-58.63	4.92	-49.9
10	38692	35.98 AV	54	-18.02	-65.83	-69.26	4.92	-59.28

Note: Margin value = Emission Level - Limit value

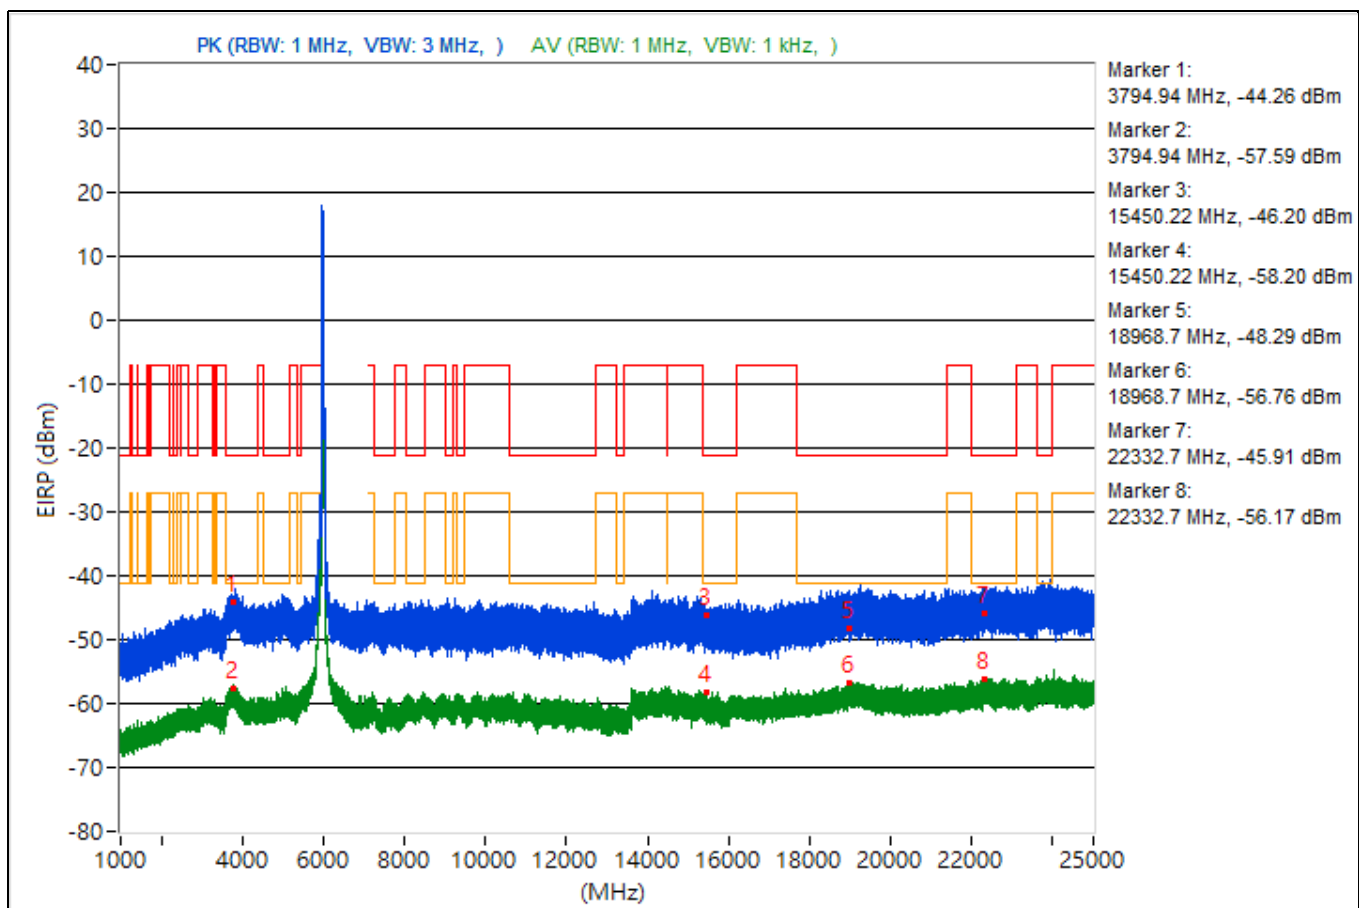


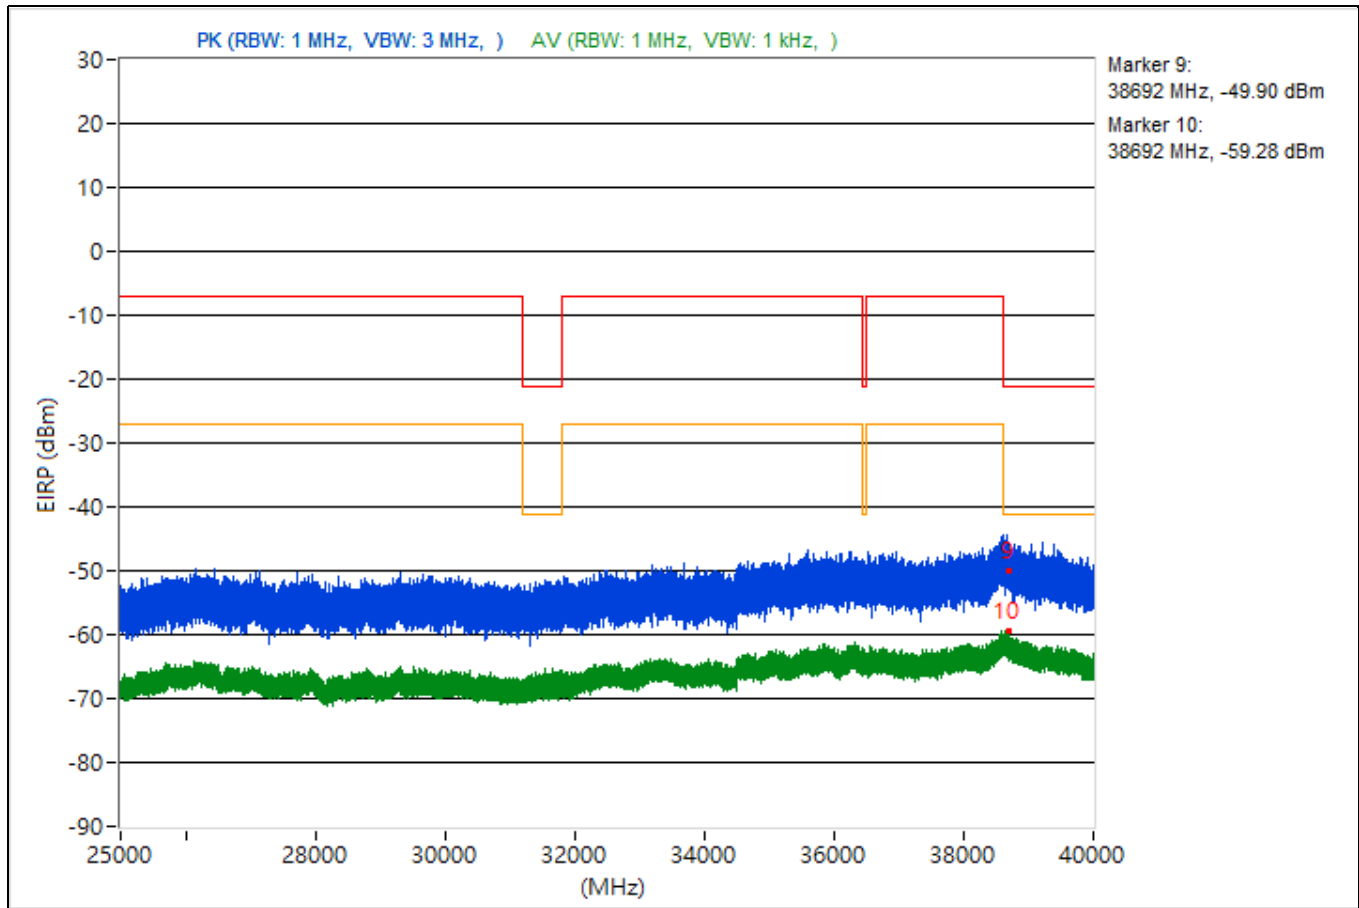


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.67	51.28 PK	74	-22.72	-51.12	-52.87	4.92	-43.98
2	3790.67	38.05 AV	54	-15.95	-63.73	-67.23	4.92	-57.21
3	14481.96	47.37 PK	74	-26.63	-58.34	-54.23	4.92	-47.89
4	14481.96	37.19 AV	54	-16.81	-64.97	-67.36	4.92	-58.07
5	19179.9	52.18 PK	74	-21.82	-49.18	-54.24	4.92	-43.08
6	19179.9	38.14 AV	54	-15.86	-66.76	-63.83	4.92	-57.12
7	23833.4	50.99 PK	74	-23.01	-52.51	-51.92	4.92	-44.27
8	23833.4	39.01 AV	54	-14.99	-66.17	-62.82	4.92	-56.25
9	38609.24	48.06 PK	74	-25.94	-57.23	-53.71	4.92	-47.2
10	38609.24	35.56 AV	54	-18.44	-66.06	-70.11	4.92	-59.7

Note: Margin value = Emission Level - Limit value

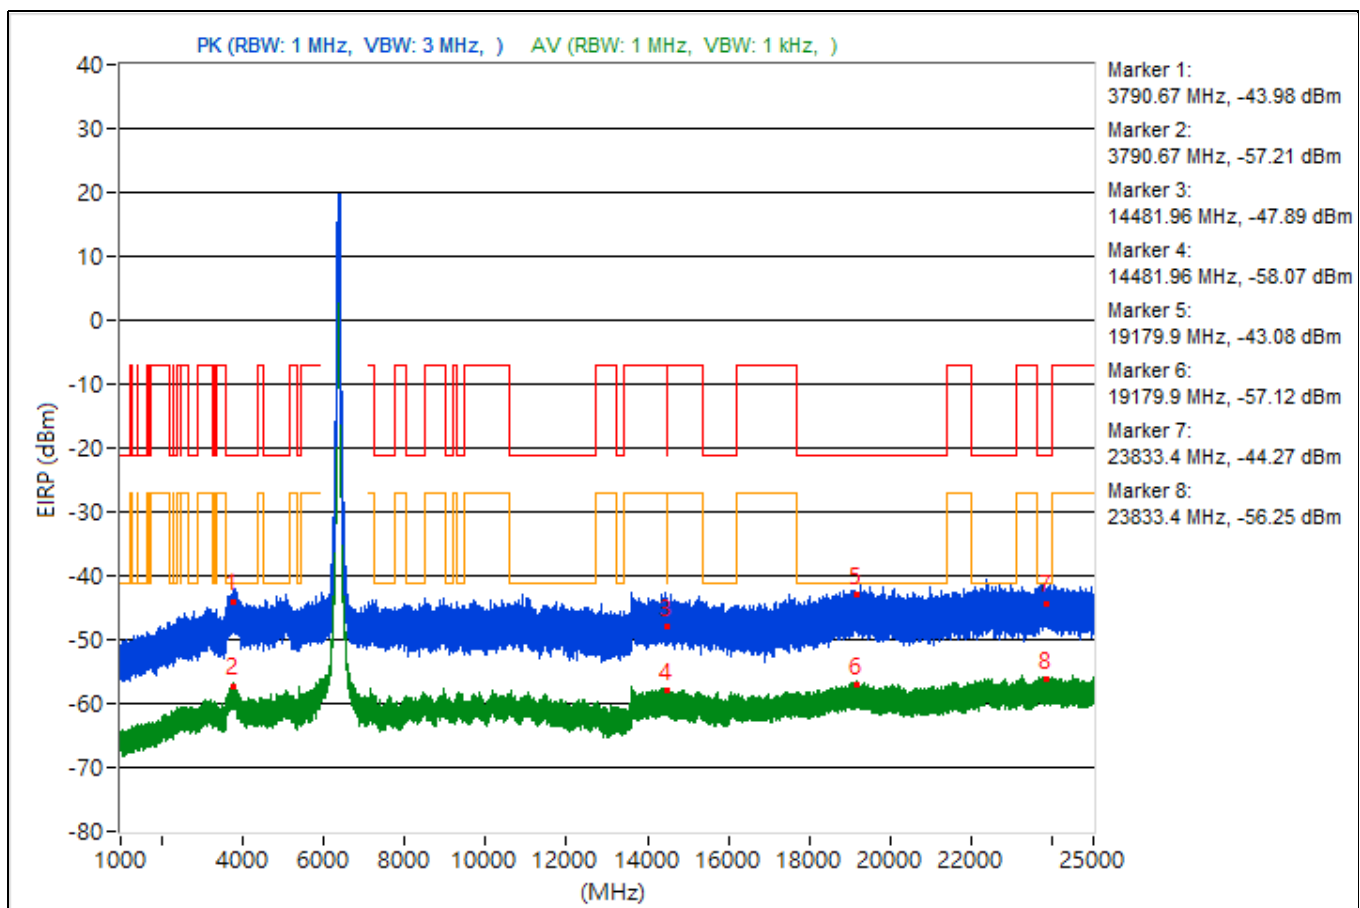


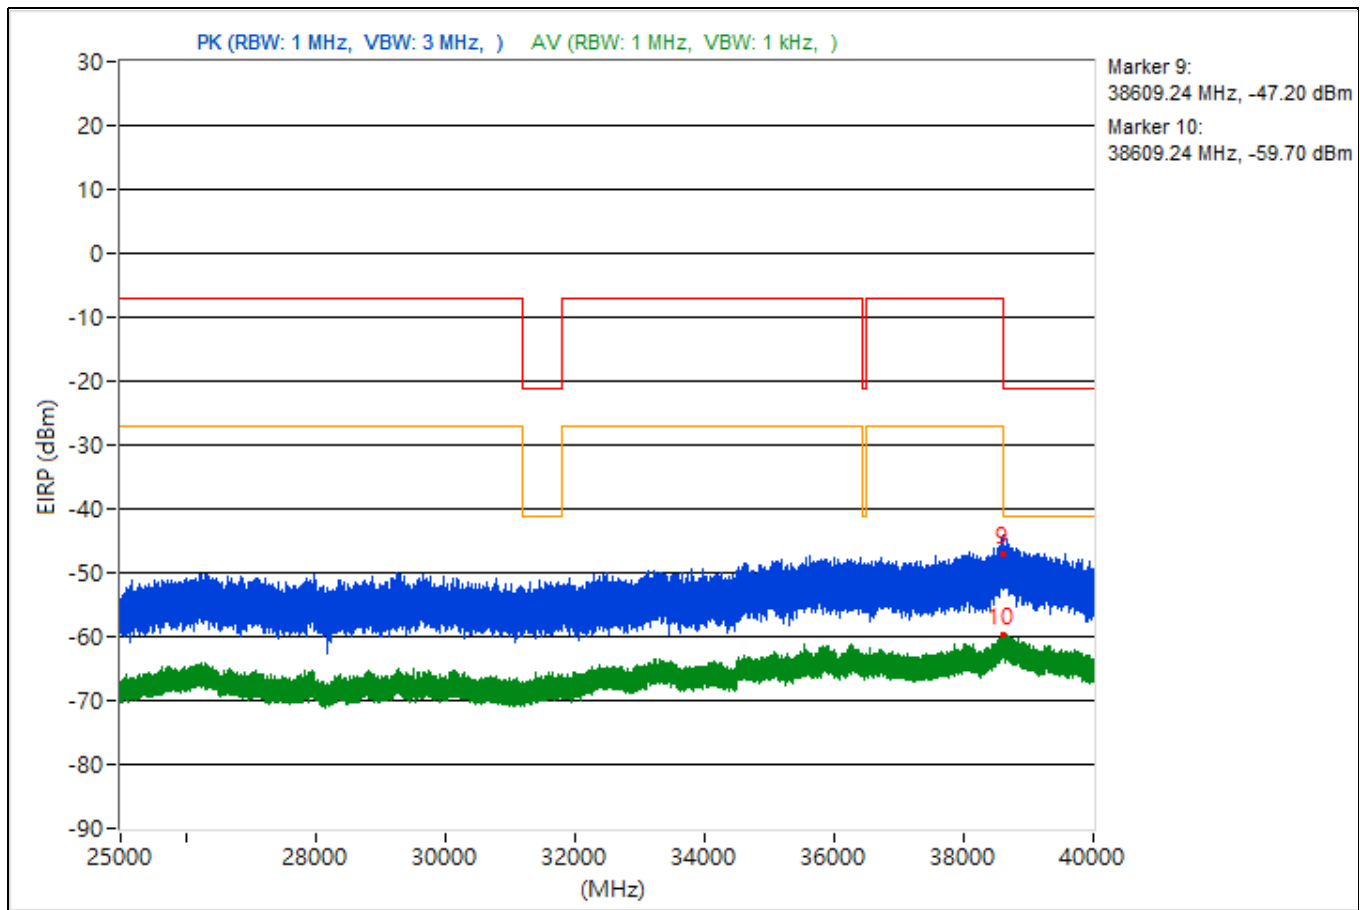


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.49	46.8 PK	74	-27.2	-55.99	-56.82	4.92	-48.46
2	3830.49	38.38 AV	54	-15.62	-66.16	-63.79	4.92	-56.88
3	14475.73	48.13 PK	74	-25.87	-54	-56.45	4.92	-47.13
4	14475.73	37.23 AV	54	-16.77	-64.71	-67.72	4.92	-58.03
5	19179.8	48.37 PK	74	-25.63	-55.31	-54.38	4.92	-46.89
6	19179.8	38.69 AV	54	-15.31	-65.29	-63.83	4.92	-56.57
7	22321.2	47.38 PK	74	-26.62	-57.46	-54.62	4.92	-47.88
8	22321.2	39.68 AV	54	-14.32	-62.45	-64.91	4.92	-55.58
9	38611.29	46.69 PK	74	-27.31	-58.77	-55.02	4.92	-48.57
10	38611.29	35.66 AV	54	-18.34	-70.36	-65.83	4.92	-59.6

Note: Margin value = Emission Level - Limit value

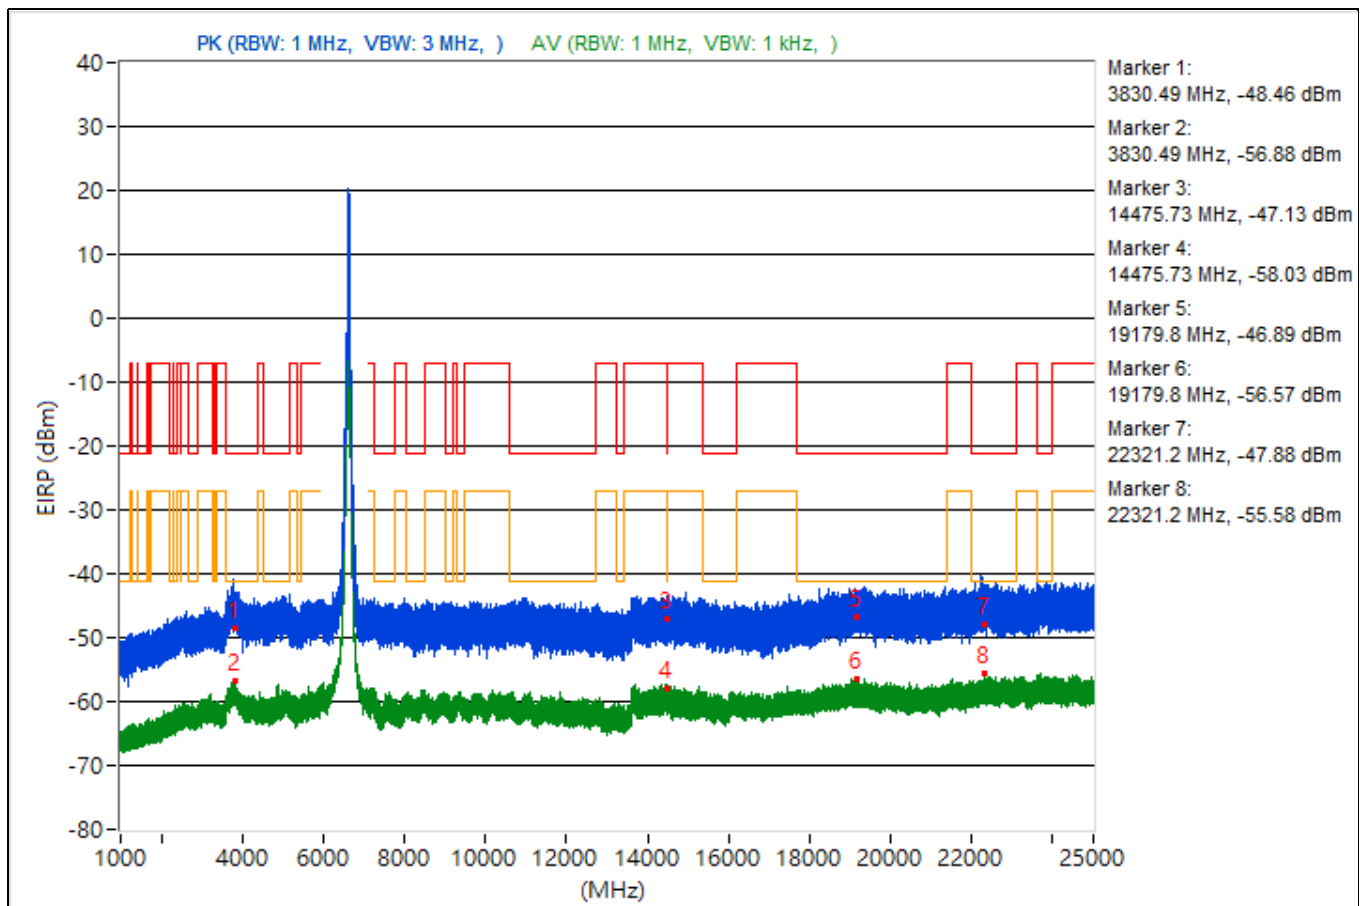

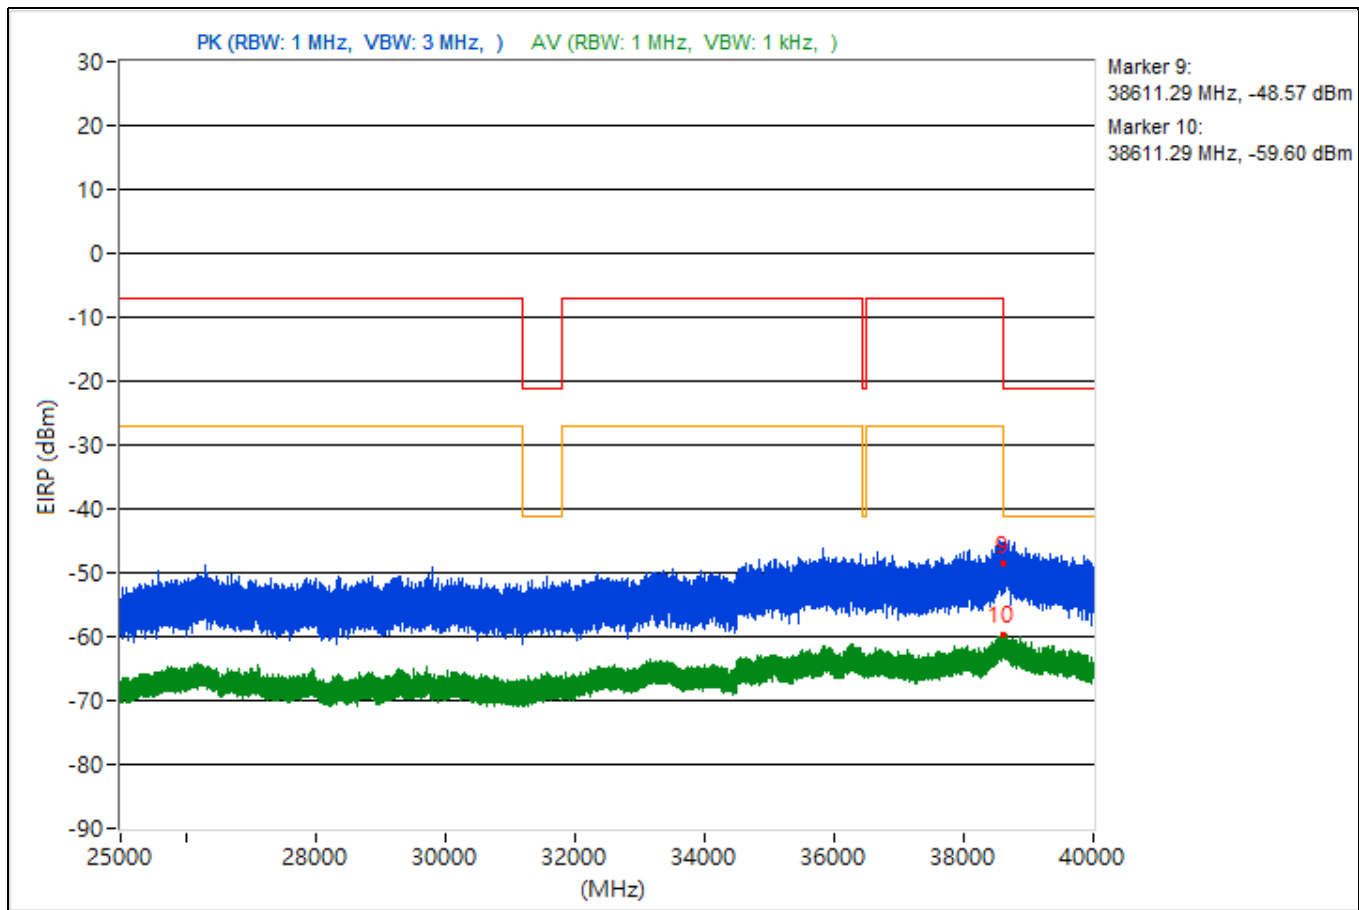

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.46	48.31 PK	74	-25.69	-53.97	-56.04	4.92	-46.95
2	3820.46	37.87 AV	54	-16.13	-63.8	-67.69	4.92	-57.39
3	14471.56	47.12 PK	74	-26.88	-55.69	-56.49	4.92	-48.14
4	14471.56	37.37 AV	54	-16.63	-64.91	-66.97	4.92	-57.89
5	19099.9	52.11 PK	74	-21.89	-54.75	-49.12	4.92	-43.15
6	19099.9	38.45 AV	54	-15.55	-63.52	-66.45	4.92	-56.81
7	23607.6	50.82 PK	74	-23.18	-53.1	-51.74	4.92	-44.44
8	23607.6	39.32 AV	54	-14.68	-65.57	-62.66	4.92	-55.94
9	38656.44	49.34 PK	74	-24.66	-54.88	-53.02	4.92	-45.92
10	38656.44	35.92 AV	54	-18.08	-68.97	-66.05	4.92	-59.34

Note: Margin value = Emission Level - Limit value

