


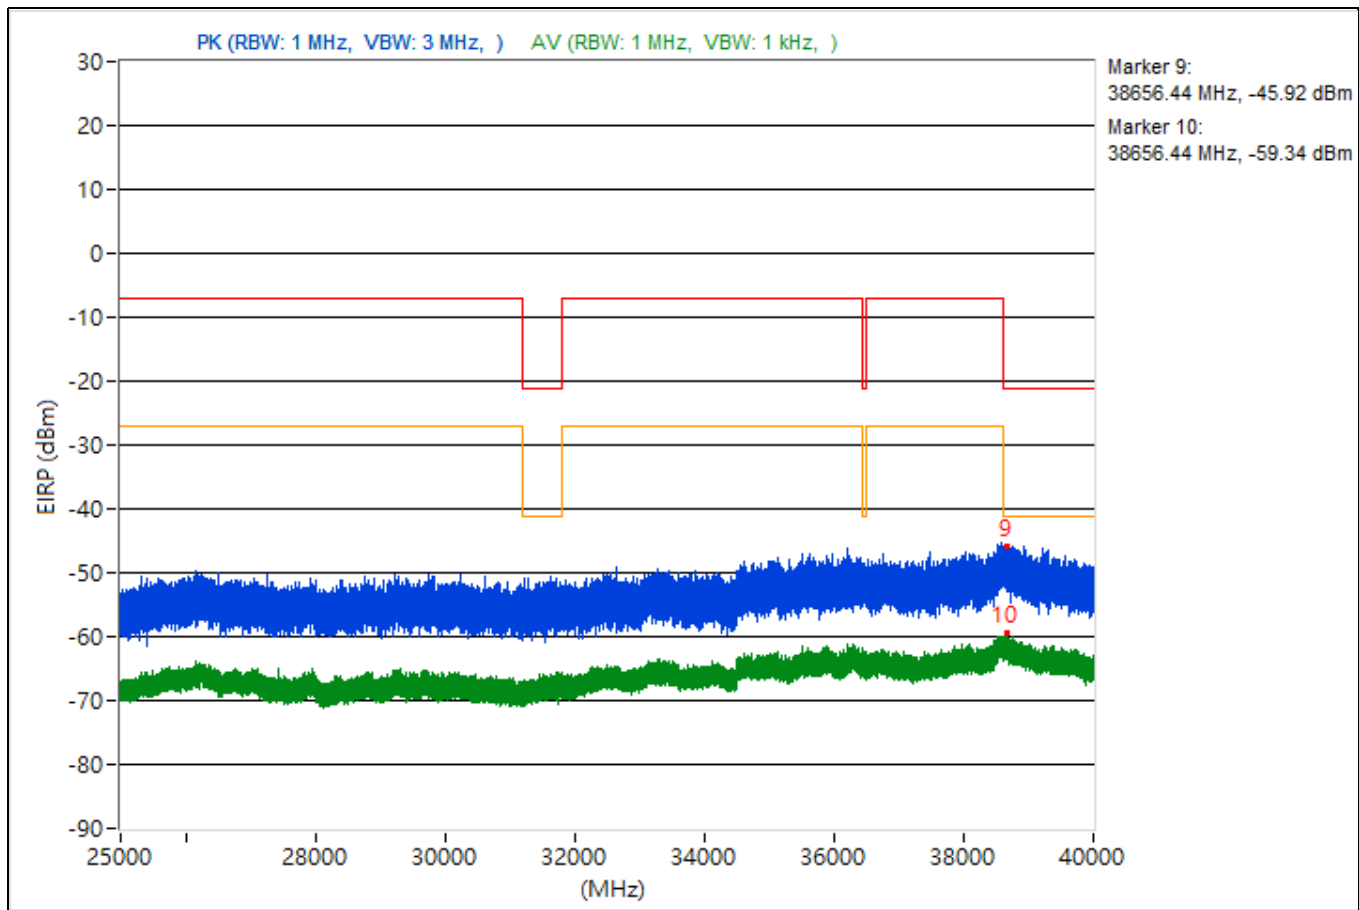



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.96	71.16 PK	88.26	-17.1	-34.17	-30.6	4.92	-24.1
2	#5874.96	62.84 AV	68.26	-5.42	-40.71	-40.01	4.92	-32.42
3	14487.11	48.35 PK	74	-25.65	-53.71	-56.36	4.92	-46.91
4	14487.11	37.5 AV	54	-16.5	-64.8	-66.8	4.92	-57.76
5	19329.1	48.13 PK	74	-25.87	-54.66	-55.51	4.92	-47.13
6	19329.1	38.44 AV	54	-15.56	-63.41	-66.69	4.92	-56.82
7	23858.3	49.05 PK	74	-24.95	-53.83	-54.47	4.92	-46.21
8	23858.3	39.73 AV	54	-14.27	-62.59	-64.53	4.92	-55.53
9	38600.8	44.56 PK	74	-29.44	-58.11	-59.23	4.92	-50.7
10	38600.8	35.81 AV	54	-18.19	-68.22	-66.69	4.92	-59.45

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

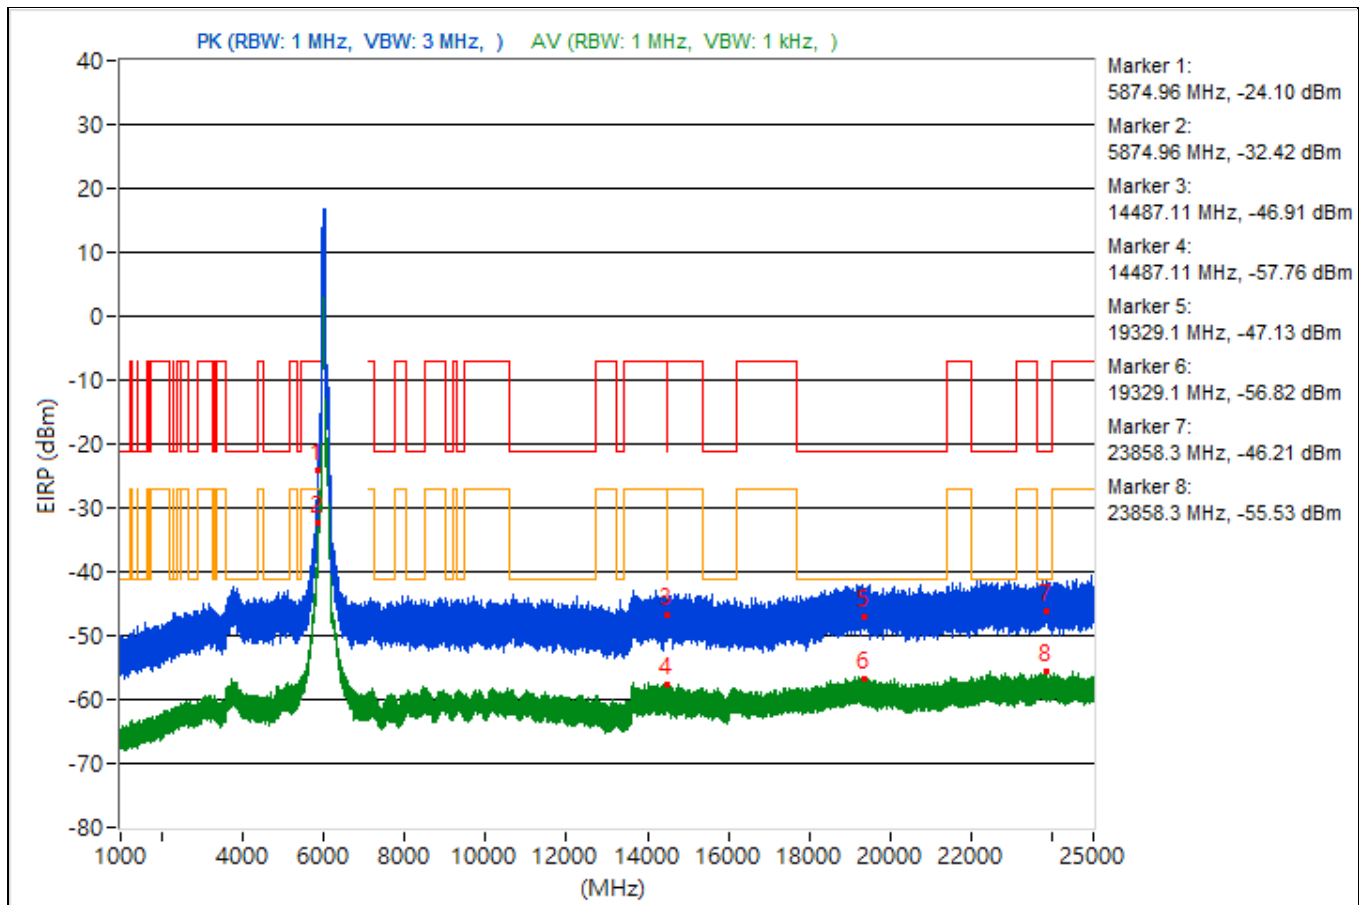


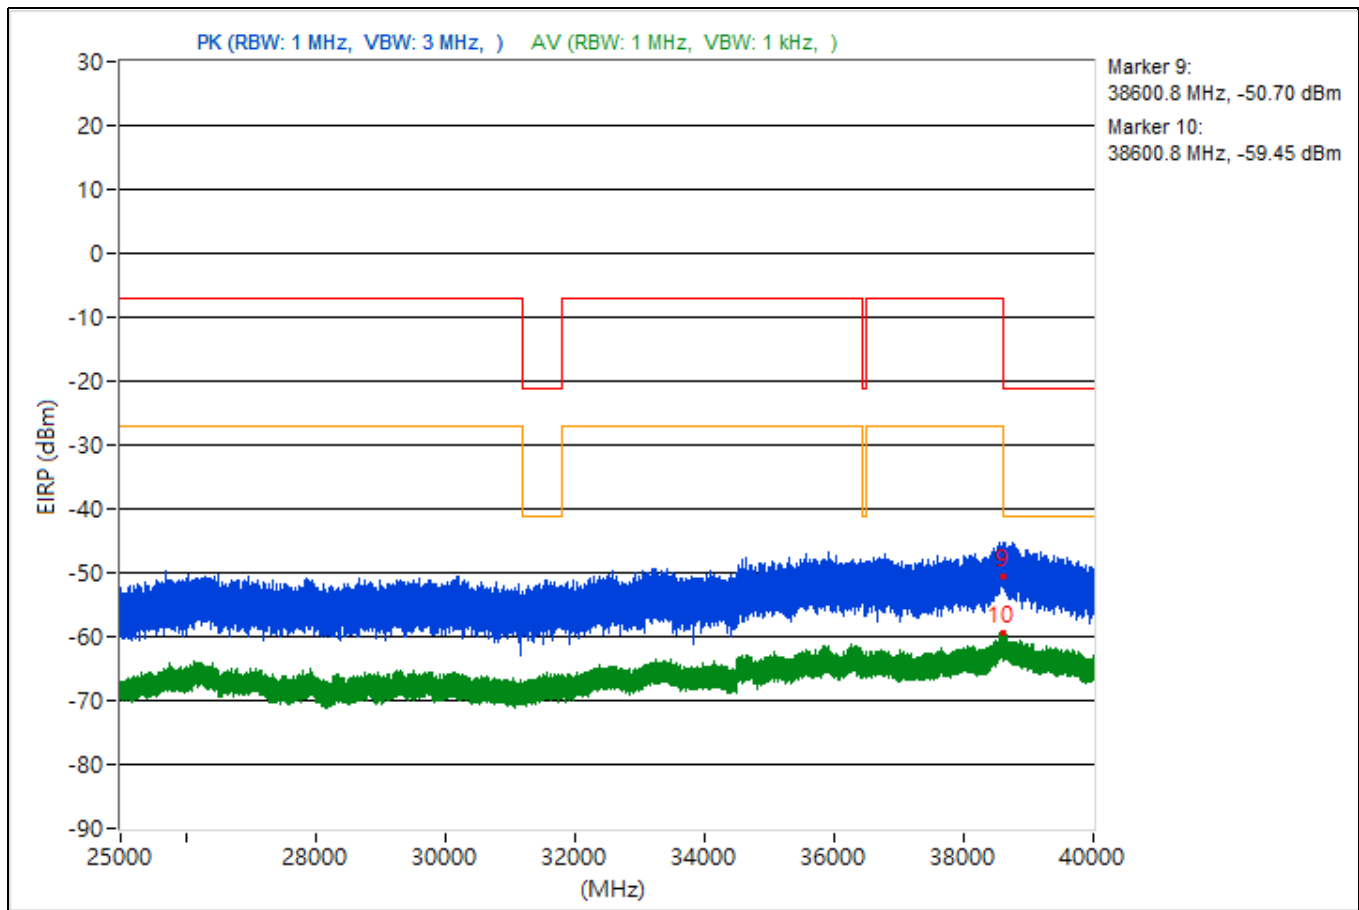


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3736.69	48.22 PK	74	-25.78	-54.41	-55.61	4.92	-47.04
2	3736.69	38.45 AV	54	-15.55	-65.66	-63.98	4.92	-56.81
3	14476.62	49.43 PK	74	-24.57	-54.14	-53.41	4.92	-45.83
4	14476.62	37.12 AV	54	-16.88	-68.22	-64.64	4.92	-58.14
5	19323.7	49.95 PK	74	-24.05	-52.08	-54.83	4.92	-45.31
6	19323.7	38.8 AV	54	-15.2	-63.49	-65.52	4.92	-56.46
7	22324.3	50.63 PK	74	-23.37	-50.99	-55.03	4.92	-44.63
8	22324.3	39.82 AV	54	-14.18	-64.18	-62.69	4.92	-55.44
9	38678.67	44.57 PK	74	-29.43	-58.9	-58.37	4.92	-50.69
10	38678.67	35.18 AV	54	-18.82	-67	-69.33	4.92	-60.08

Note: Margin value = Emission Level - Limit value

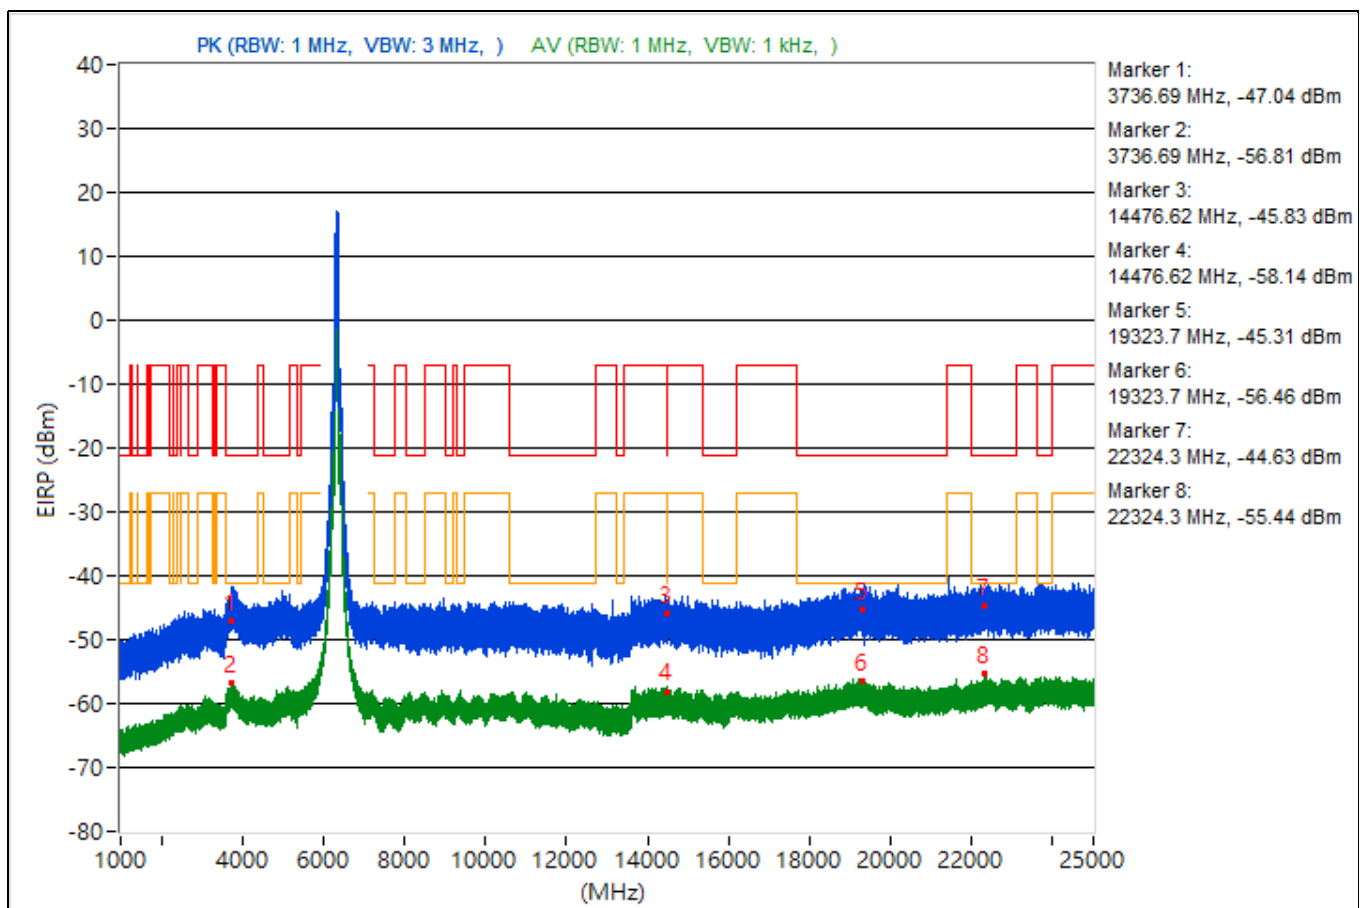


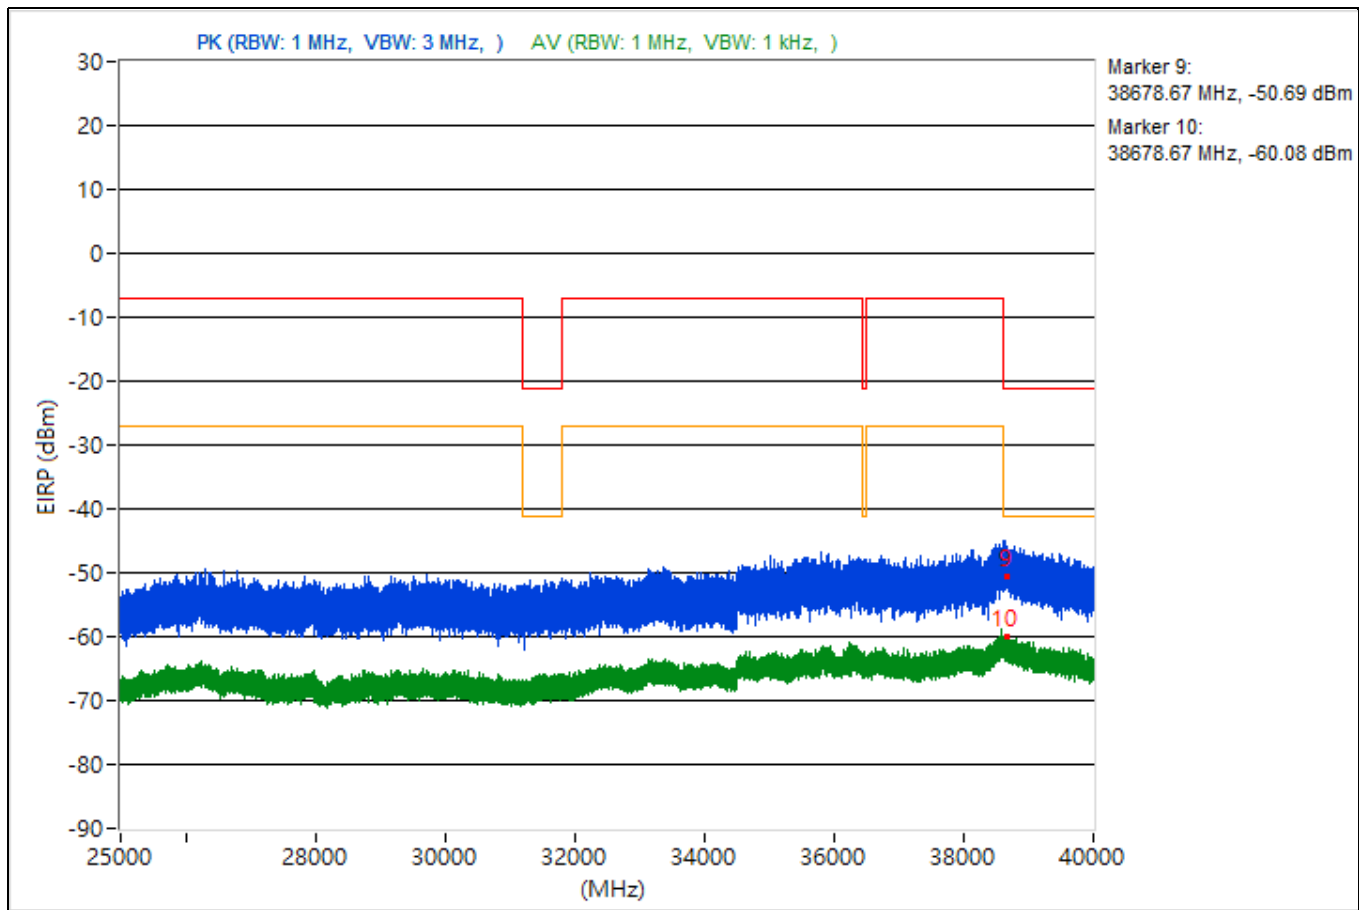


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3788.57	50.14 PK	74	-23.86	-53.68	-52.51	4.92	-45.12
2	3788.57	37.74 AV	54	-16.26	-67.48	-64.07	4.92	-57.52
3	14479.64	50.46 PK	74	-23.54	-50.88	-56	4.92	-44.8
4	14479.64	37.7 AV	54	-16.3	-64.58	-66.64	4.92	-57.56
5	20011.5	50.31 PK	74	-23.69	-53.95	-52.02	4.92	-44.95
6	20011.5	38.4 AV	54	-15.6	-63.09	-67.64	4.92	-56.86
7	23688.7	49.65 PK	74	-24.35	-51.9	-56.24	4.92	-45.61
8	23688.7	39.18 AV	54	-14.82	-62.58	-66.17	4.92	-56.08
9	38601.87	45.62 PK	74	-28.38	-58.78	-56.62	4.92	-49.64
10	38601.87	35.73 AV	54	-18.27	-69.11	-66.27	4.92	-59.53

Note: Margin value = Emission Level - Limit value

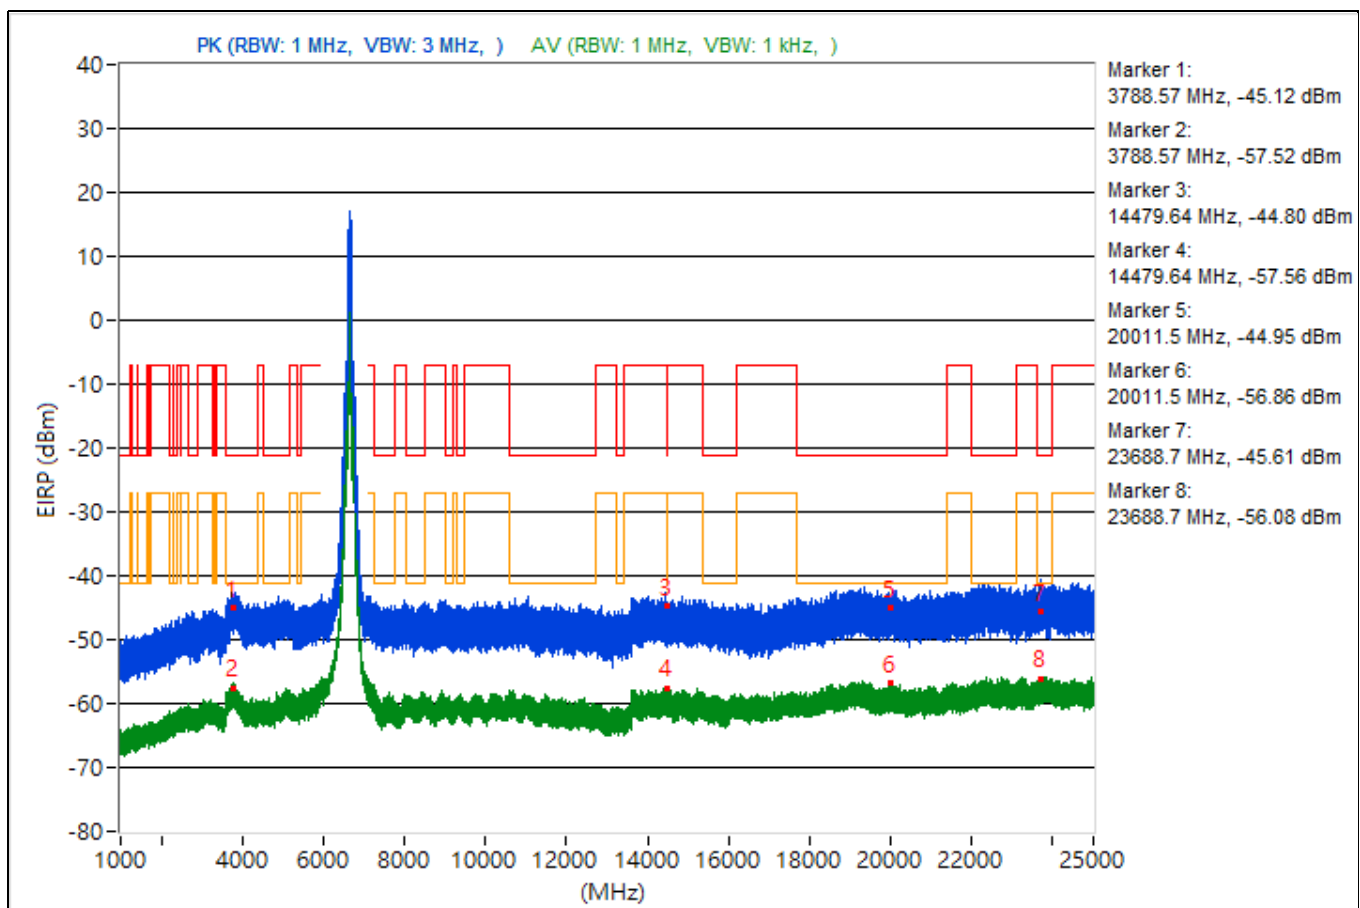

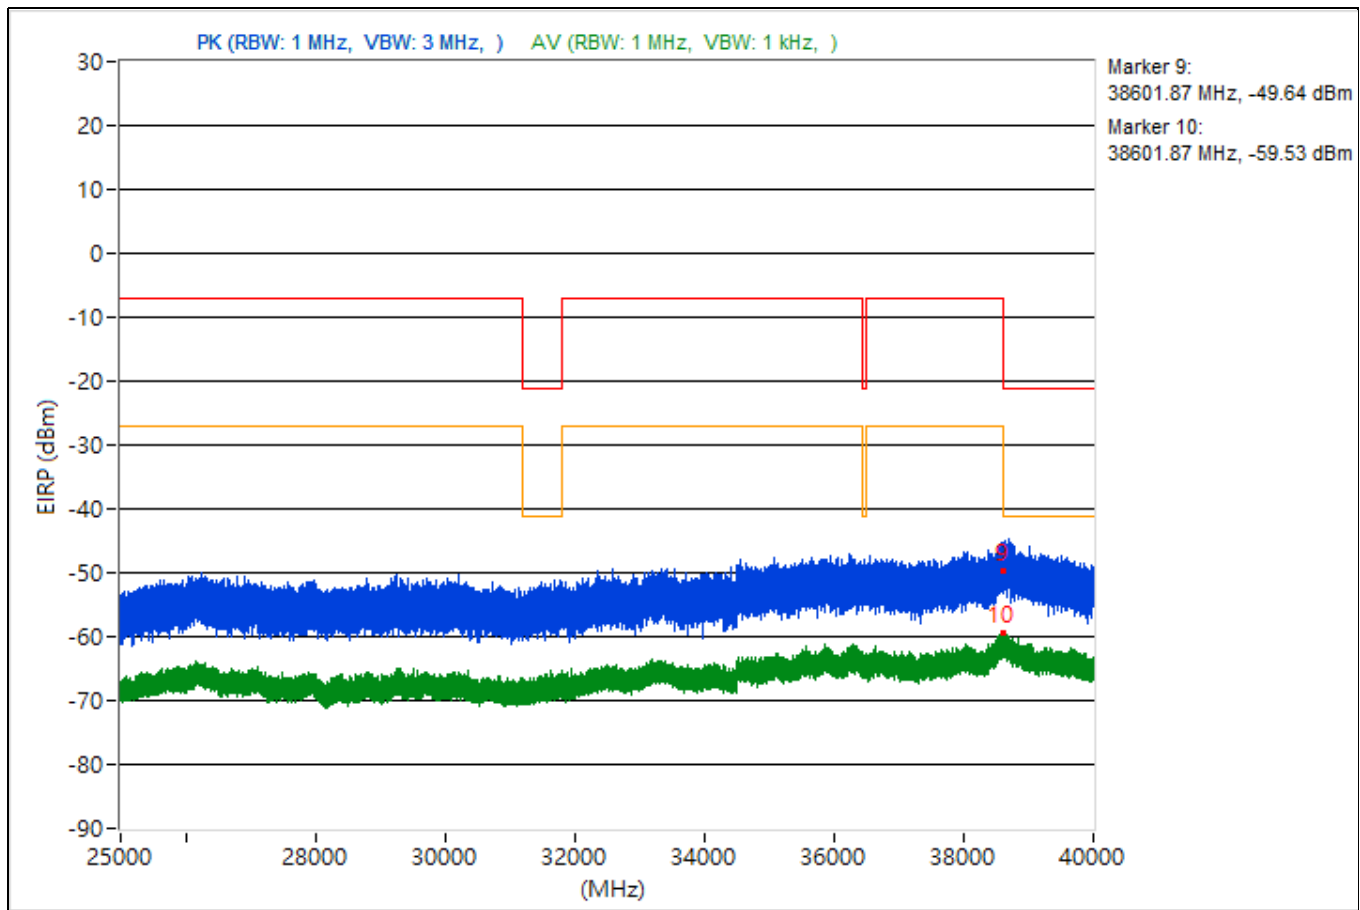



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5873.87	69.29 PK	88.26	-18.97	-32.93	-35.17	4.92	-25.97
2	#5873.87	62.26 AV	68.26	-6	-40.37	-41.58	4.92	-33
3	14472.62	47.73 PK	74	-26.27	-56.2	-54.82	4.92	-47.53
4	14472.62	37.24 AV	54	-16.76	-64.08	-69.3	4.92	-58.02
5	19042.5	49.58 PK	74	-24.42	-52.69	-54.79	4.92	-45.68
6	19042.5	38.66 AV	54	-15.34	-65.77	-63.57	4.92	-56.6
7	23933.5	50.15 PK	74	-23.85	-53.79	-52.39	4.92	-45.11
8	23933.5	39.54 AV	54	-14.46	-65.4	-62.4	4.92	-55.72
9	38652.8	46.9 PK	74	-27.1	-55.01	-58.1	4.92	-48.36
10	38652.8	35.51 AV	54	-18.49	-66.82	-68.74	4.92	-59.75

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

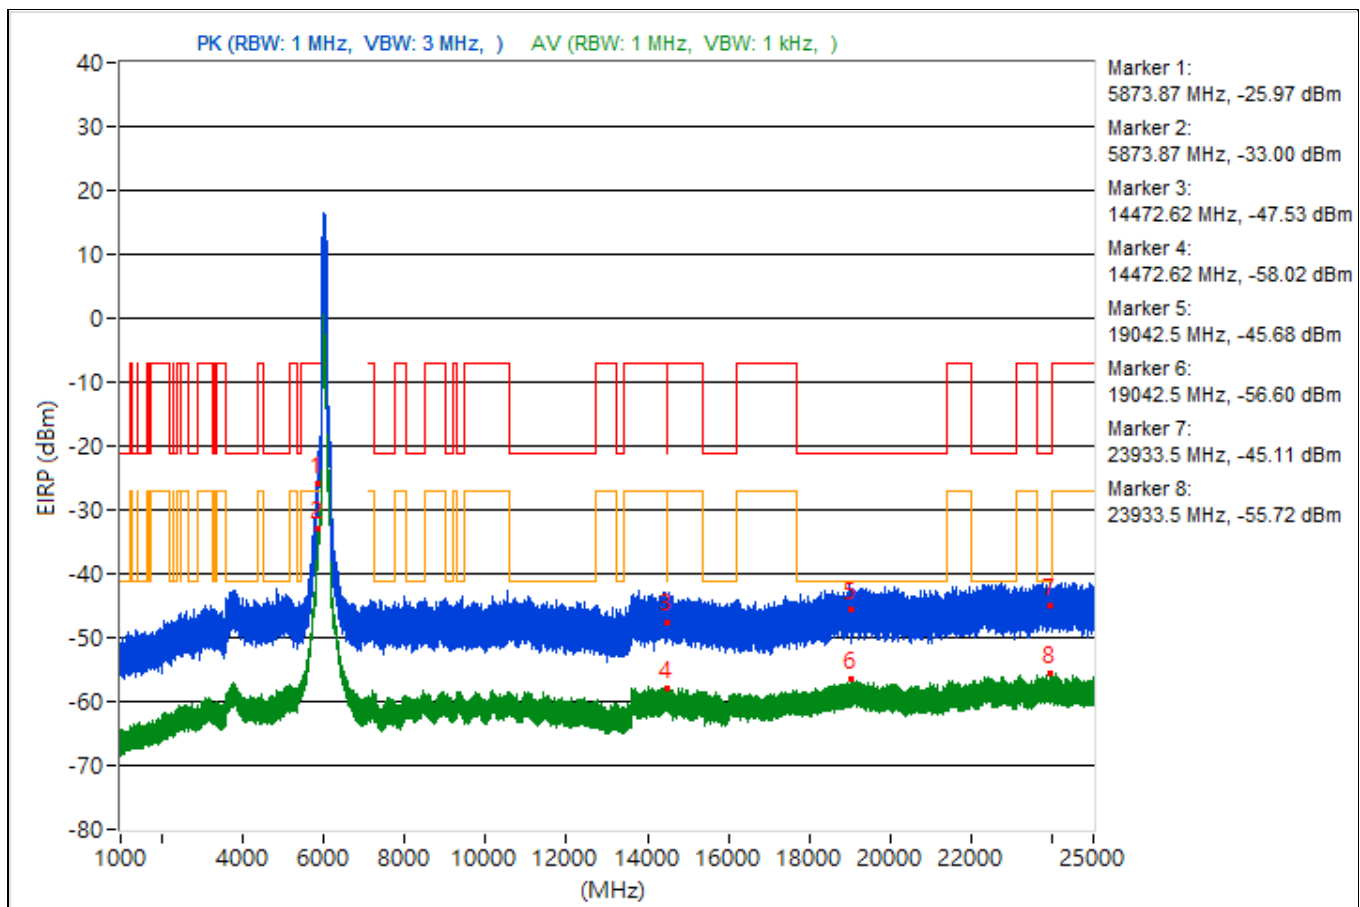


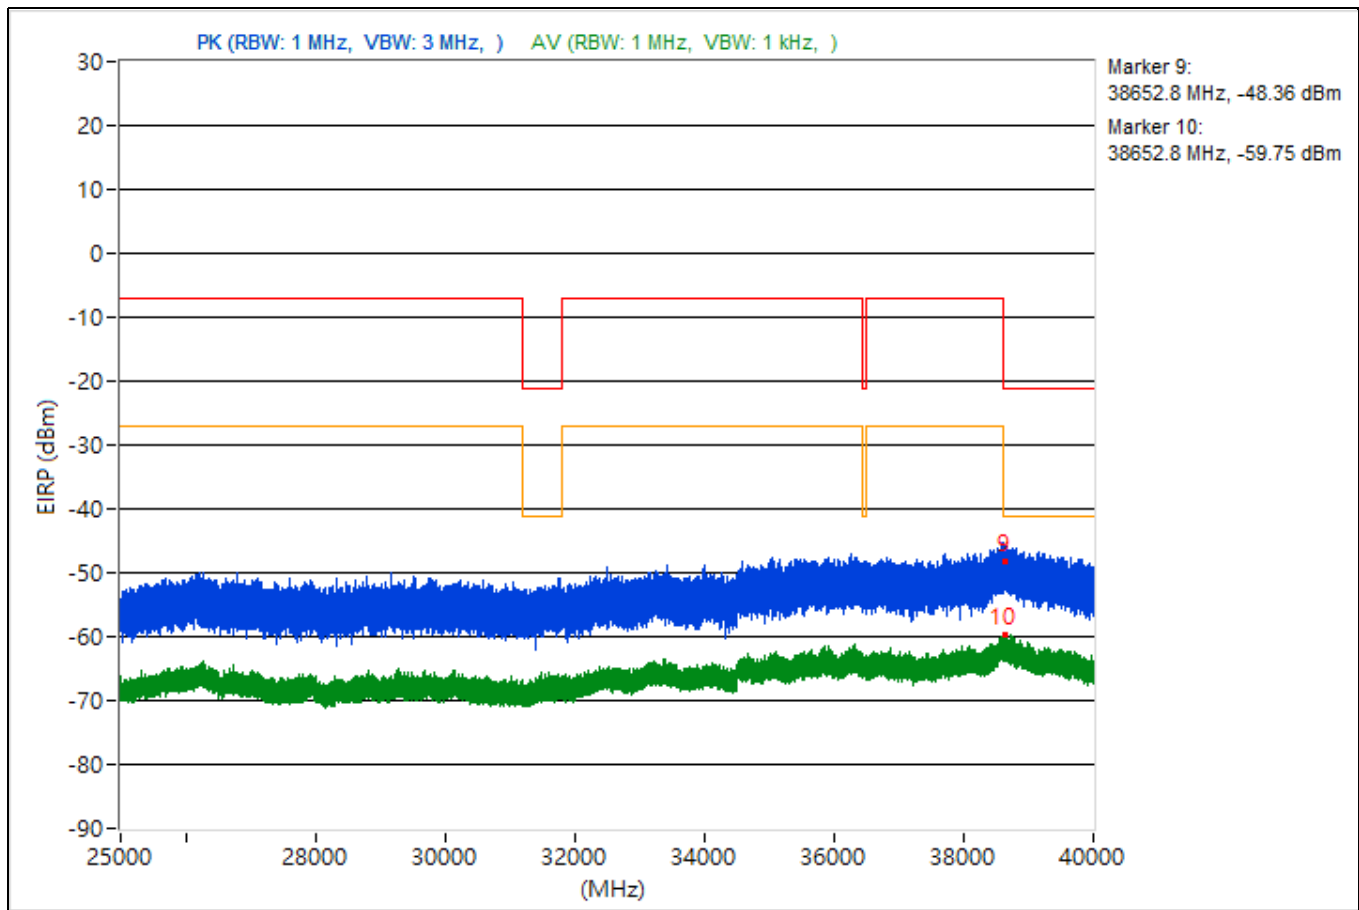


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3833.91	50.33 PK	74	-23.67	-53	-52.72	4.92	-44.93
2	3833.91	37.94 AV	54	-16.06	-63.79	-67.48	4.92	-57.32
3	9368.18	47.39 PK	74	-26.61	-55.53	-56.09	4.92	-47.87
4	9368.18	37.35 AV	54	-16.65	-65.07	-66.77	4.92	-57.91
5	19156.5	47.14 PK	74	-26.86	-54.56	-58.36	4.92	-48.12
6	19156.5	38.46 AV	54	-15.54	-65.9	-63.81	4.92	-56.8
7	22241.4	48.38 PK	74	-25.62	-54.85	-54.77	4.92	-46.88
8	22241.4	39.2 AV	54	-14.8	-65.32	-62.98	4.92	-56.06
9	38611.02	47.54 PK	74	-26.46	-56.48	-54.96	4.92	-47.72
10	38611.02	36.18 AV	54	-17.82	-66	-68.32	4.92	-59.08

Note: Margin value = Emission Level - Limit value

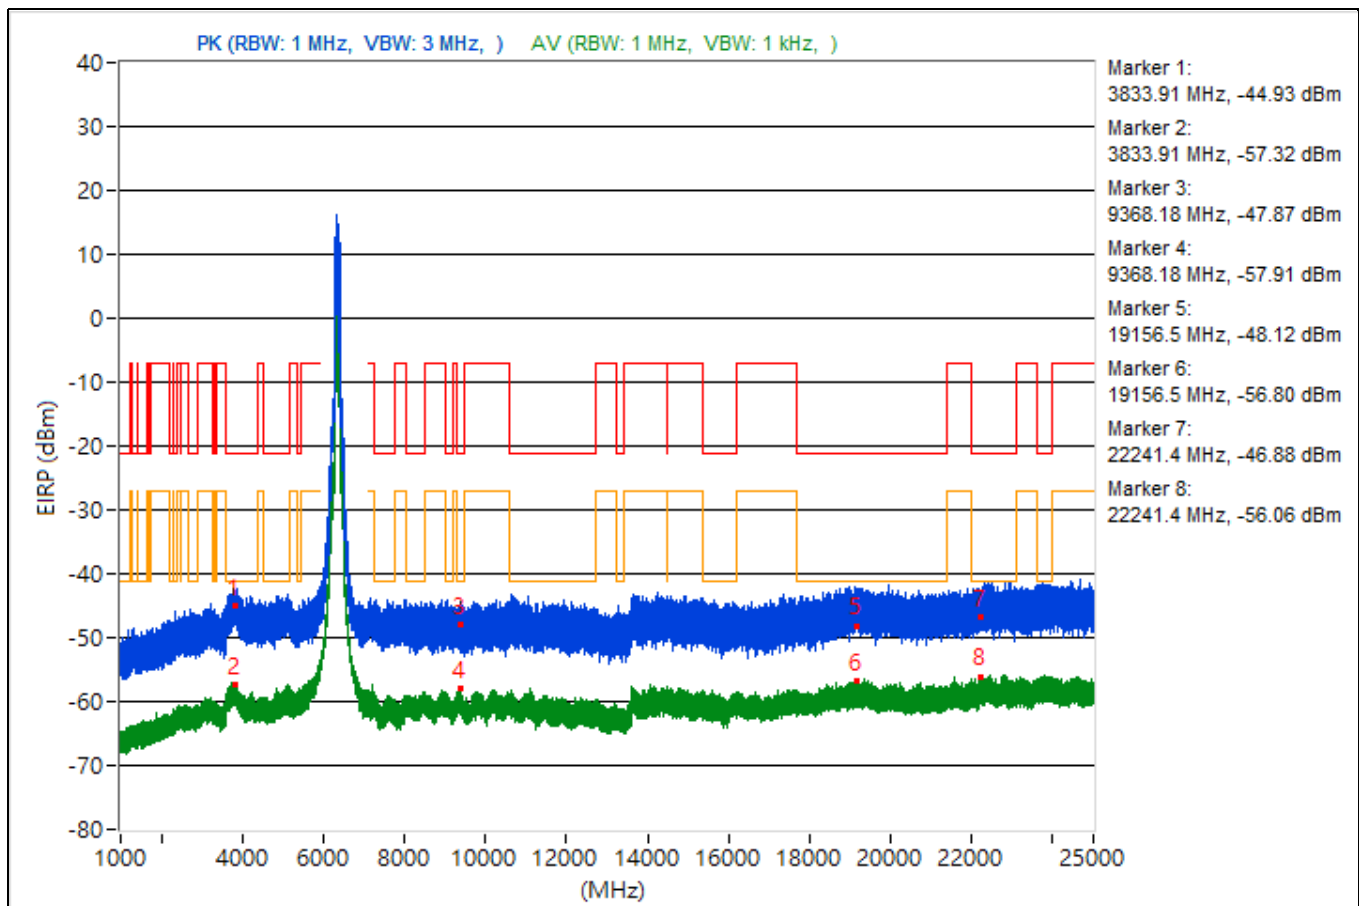


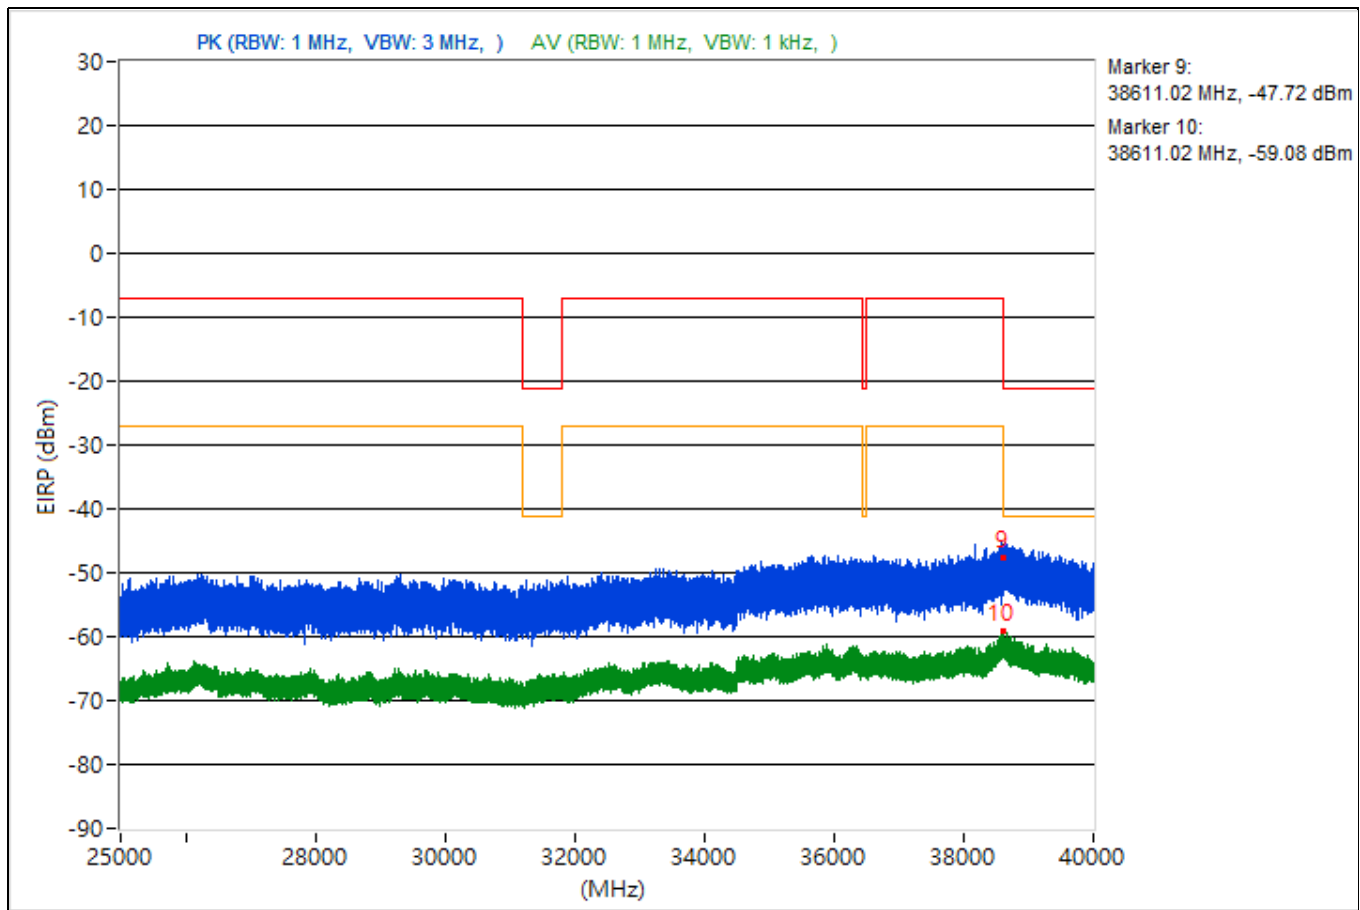


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3748.82	49.59 PK	74	-24.41	-53.58	-53.63	4.92	-45.67
2	3748.82	38.16 AV	54	-15.84	-67.13	-63.63	4.92	-57.1
3	14481.42	49.08 PK	74	-24.92	-54.53	-53.73	4.92	-46.18
4	14481.42	37.56 AV	54	-16.44	-64.21	-67.75	4.92	-57.7
5	21055	48.57 PK	74	-25.43	-53.15	-56.85	4.92	-46.69
6	21055	38.81 AV	54	-15.19	-63.67	-65.23	4.92	-56.45
7	23864.3	51.76 PK	74	-22.24	-50.23	-53.1	4.92	-43.5
8	23864.3	39.18 AV	54	-14.82	-62.64	-66.03	4.92	-56.08
9	38607.38	47.49 PK	74	-26.51	-56	-55.41	4.92	-47.77
10	38607.38	35.32 AV	54	-18.68	-66.62	-69.64	4.92	-59.94

Note: Margin value = Emission Level - Limit value

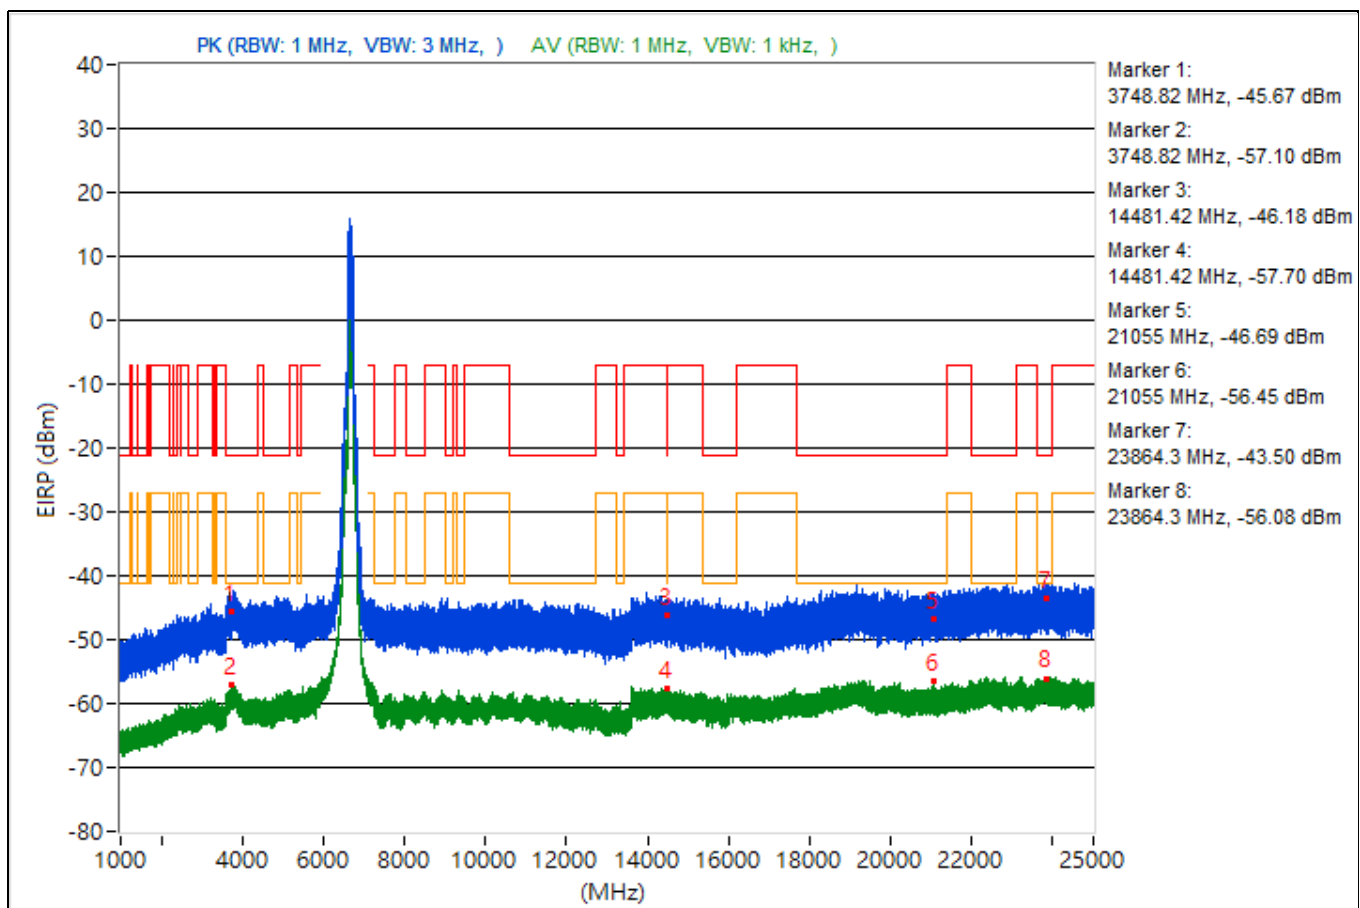

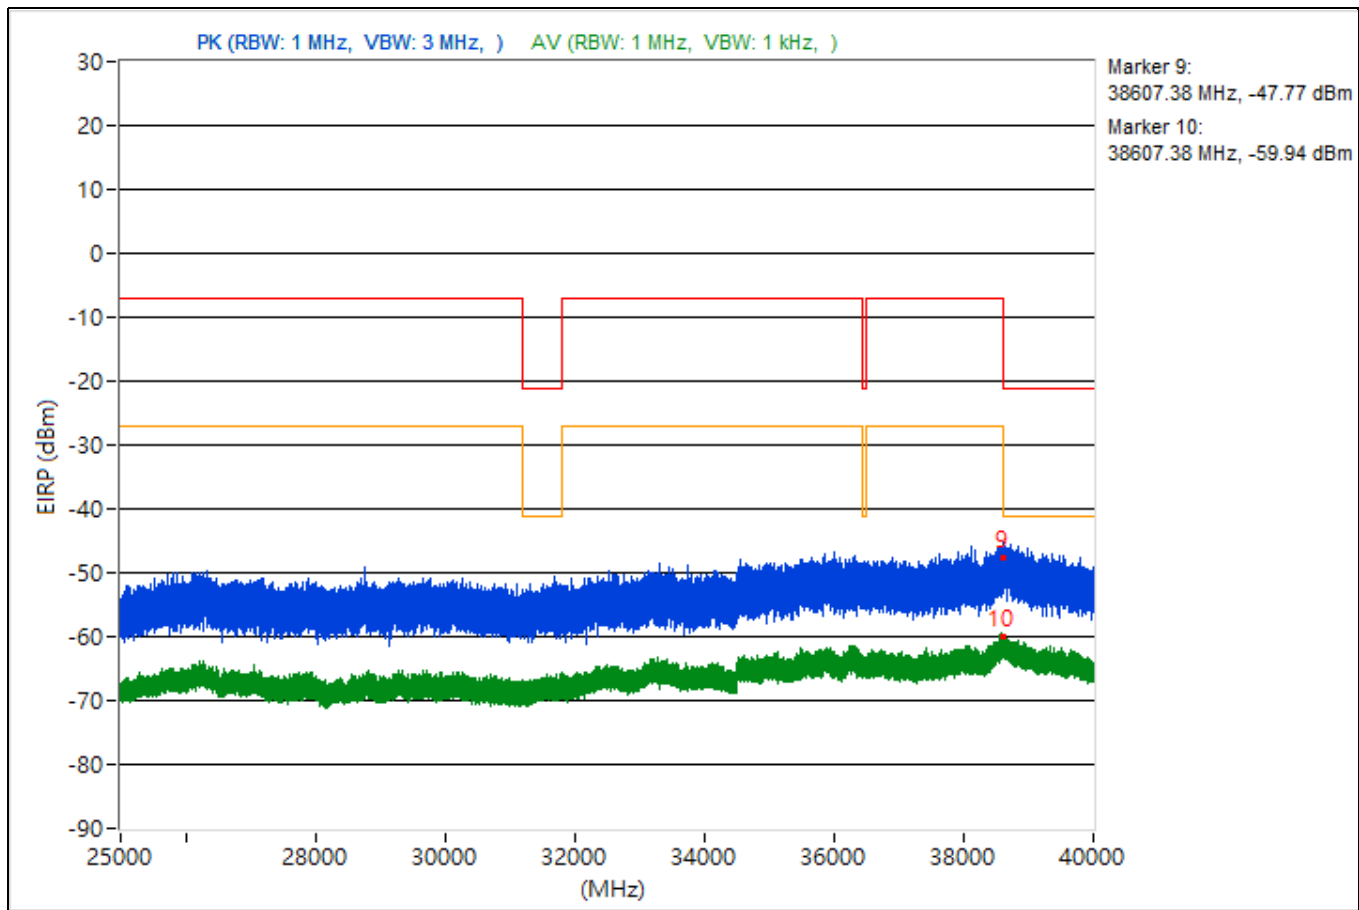


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5936.98	111.49 PK			5.34	5.56	7.77	16.23
2	*5936.98	103.7 AV			-1.87	-2.86	7.77	8.44
3	#5924.98	84.15 PK	88.26	-4.11	-21.26	-22.63	7.77	-11.11
4	#5924.98	68.03 AV	68.26	-0.23	-37.65	-38.41	7.77	-27.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

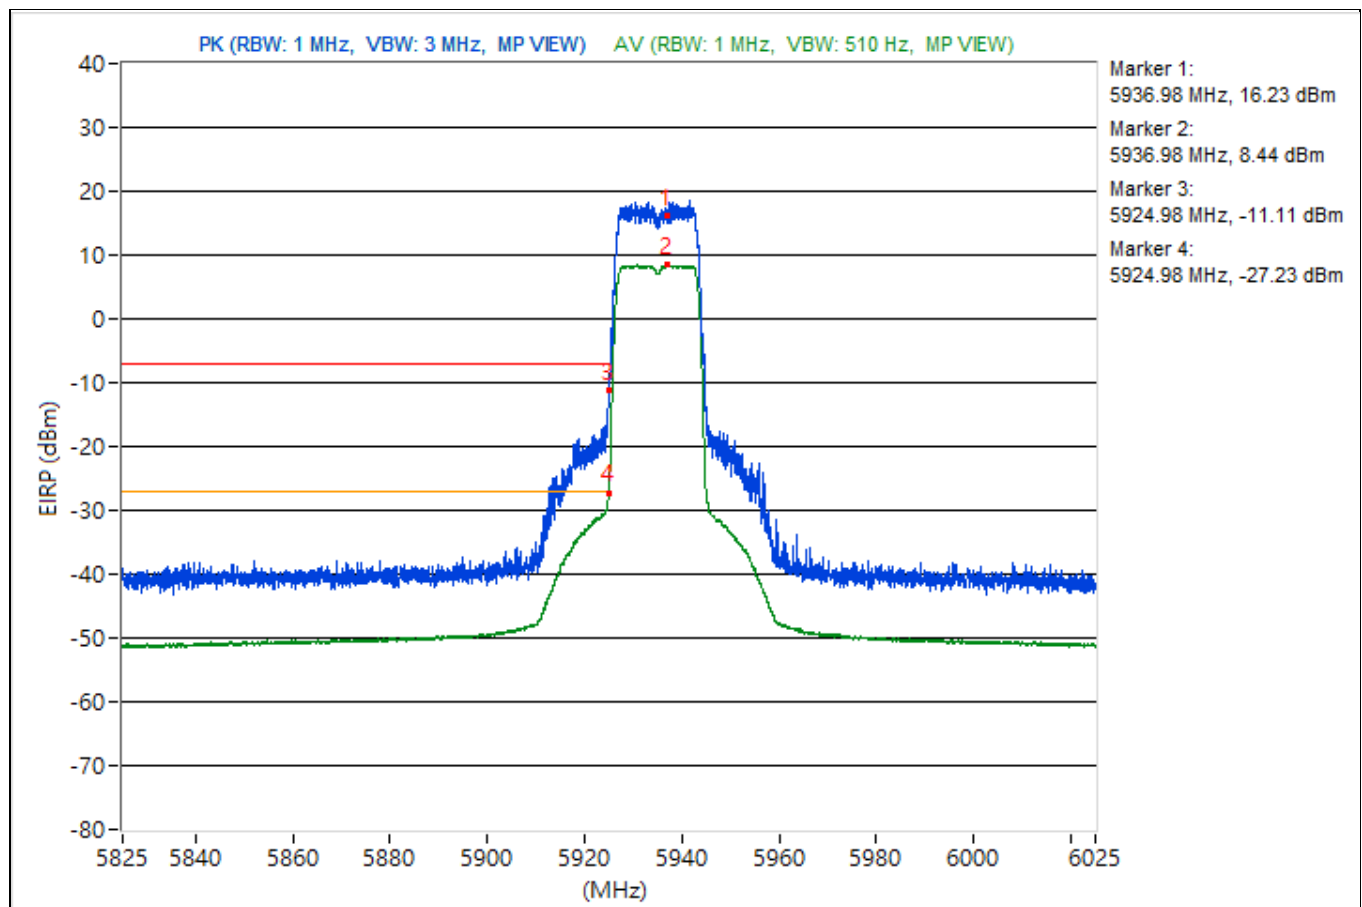


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.52	119.72 PK			13.06	14.21	7.77	24.46
2	*5953.52	112.29 AV			5.97	6.52	7.77	17.03
3	#5924.45	64.77 PK	88.26	-23.49	-40.76	-41.86	7.77	-30.49
4	#5924.45	55.71 AV	68.26	-12.55	-50.32	-50.34	7.77	-39.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

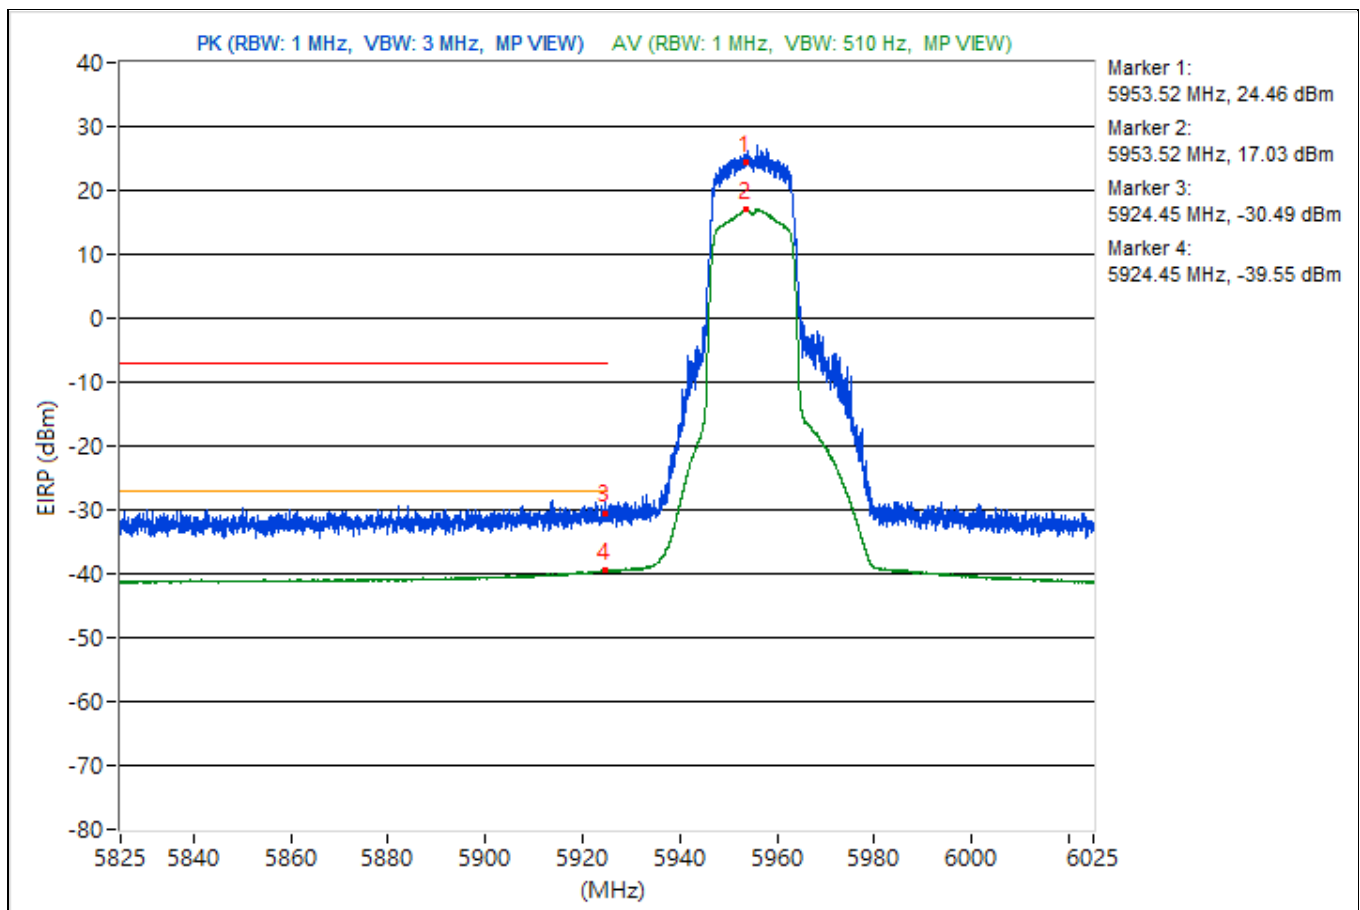


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.87	88.82 PK			-13.62	-14.89	4.76	-6.44
2	*5935.87	80.84 AV			-21.69	-22.77	4.76	-14.42
3	#5924.98	78.59 PK	88.26	-9.67	-23.88	-25.08	4.76	-16.67
4	#5924.98	68.11 AV	68.26	-0.15	-34.48	-35.4	4.76	-27.15

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

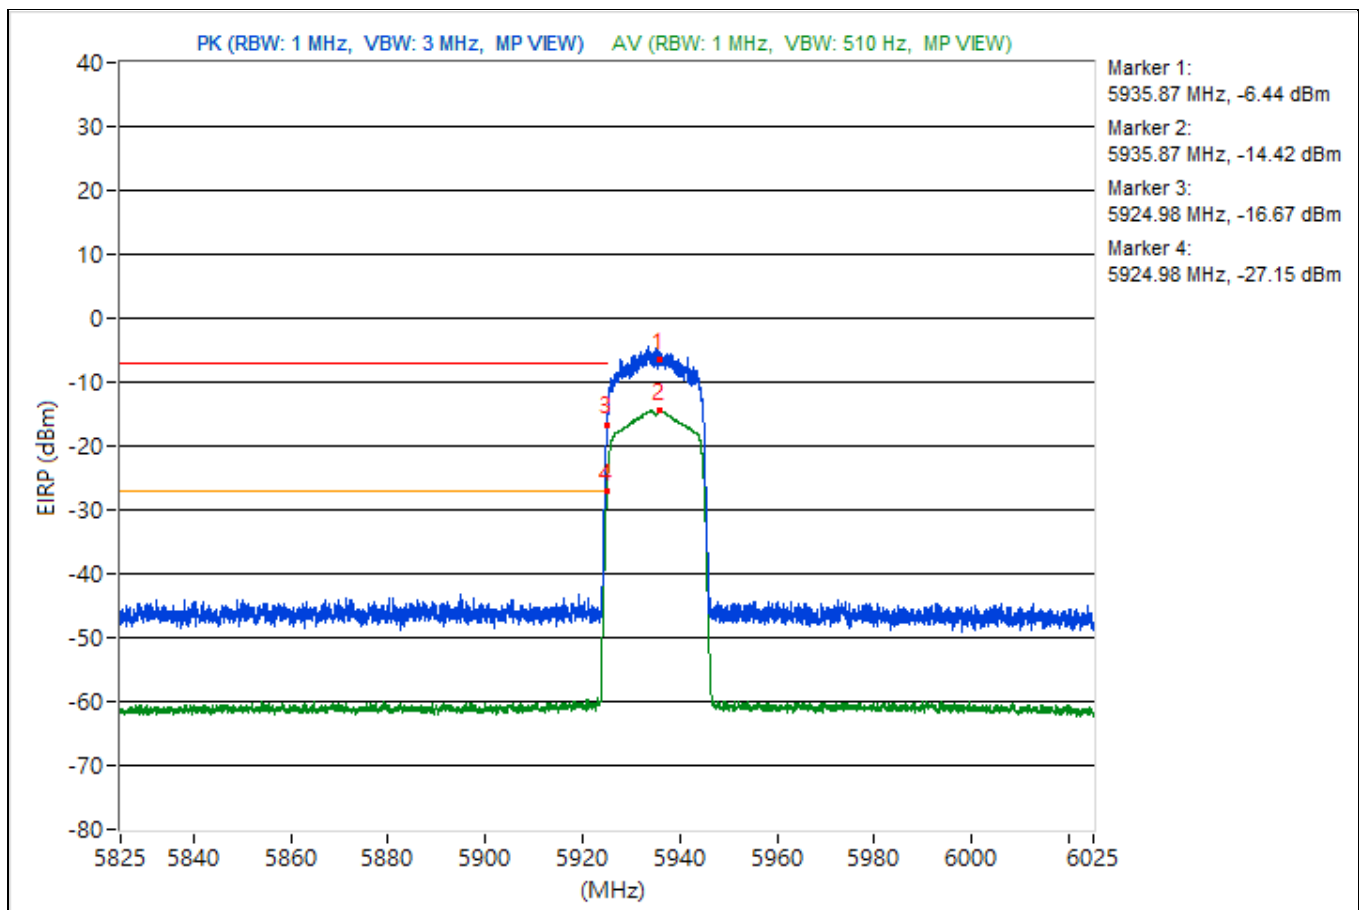


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.93	120.66 PK			18.45	16.61	4.76	25.4
2	*5955.93	111.96 AV			9.19	8.66	4.76	16.7
3	#5924.5	67.9 PK	88.26	-20.36	-36.69	-33.98	4.76	-27.36
4	#5924.5	55.76 AV	68.26	-12.5	-46.75	-47.86	4.76	-39.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

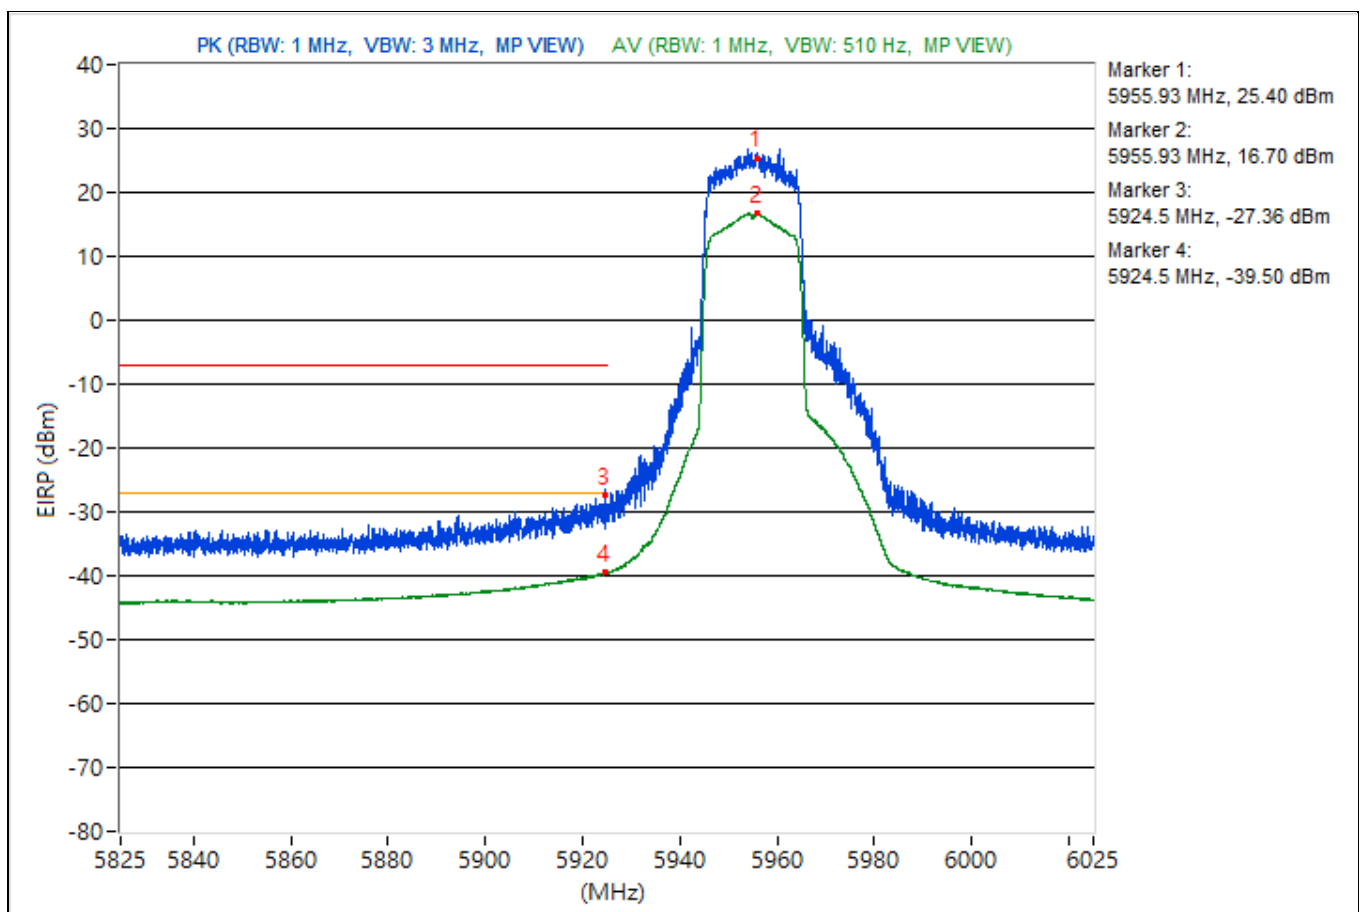


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5966.32	118.76 PK			15.56	15.9	4.76	23.5
2	*5966.32	110.04 AV			6.89	7.13	4.76	14.78
3	#5924.82	79.05 PK	88.26	-9.21	-23.09	-25.12	4.76	-16.21
4	#5924.82	68.18 AV	68.26	-0.08	-35.28	-34.45	4.76	-27.08

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

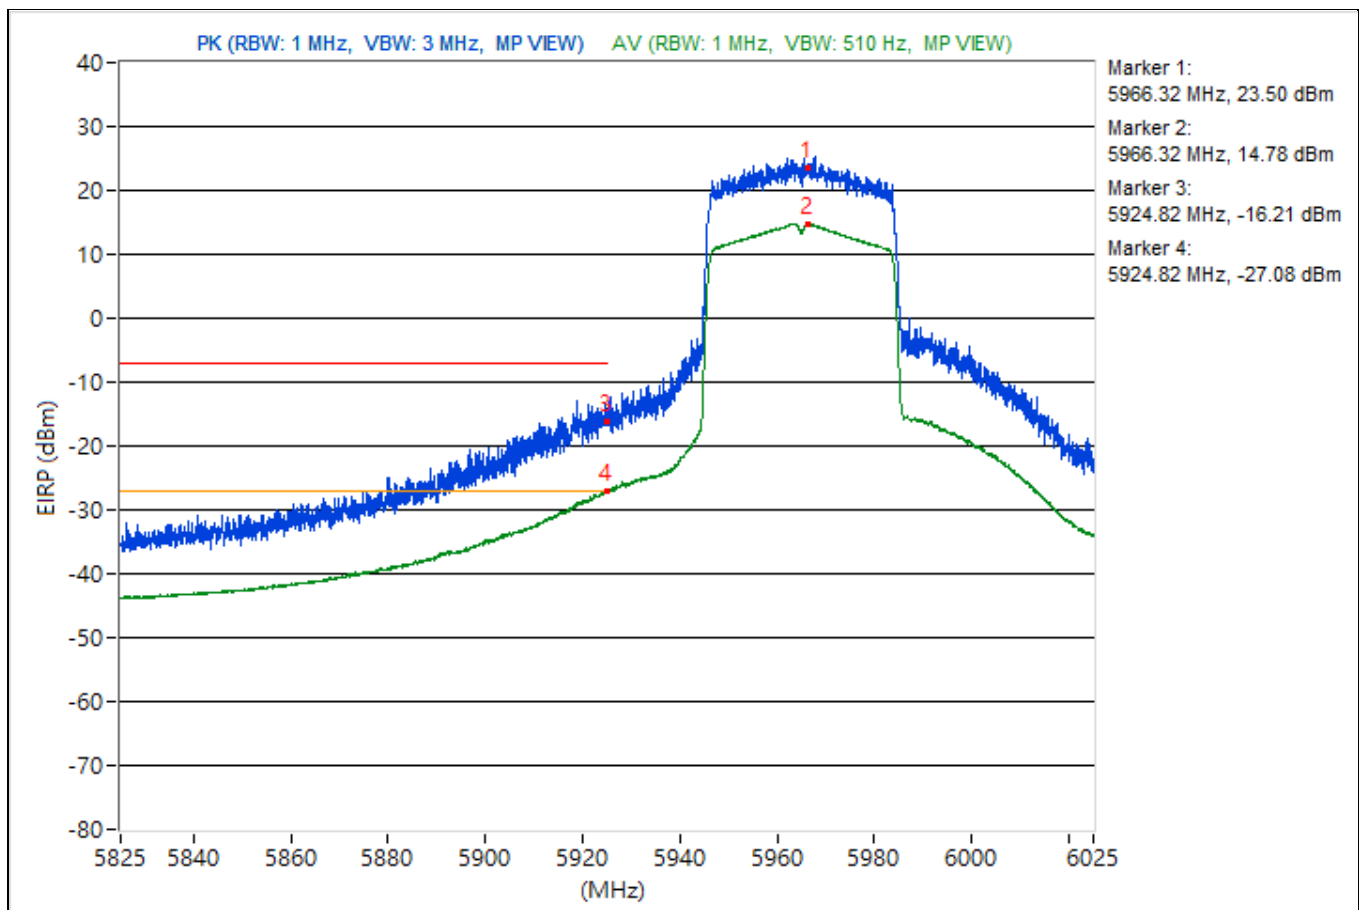


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5983.8	113.4 PK			8.51	11.67	4.76	18.14
2	*5983.8	105.55 AV			2.37	2.67	4.76	10.29
3	#5922.5	72.9 PK	88.26	-15.36	-31.38	-29.17	4.76	-22.36
4	#5922.5	64.07 AV	68.26	-4.19	-40.03	-38.11	4.76	-31.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

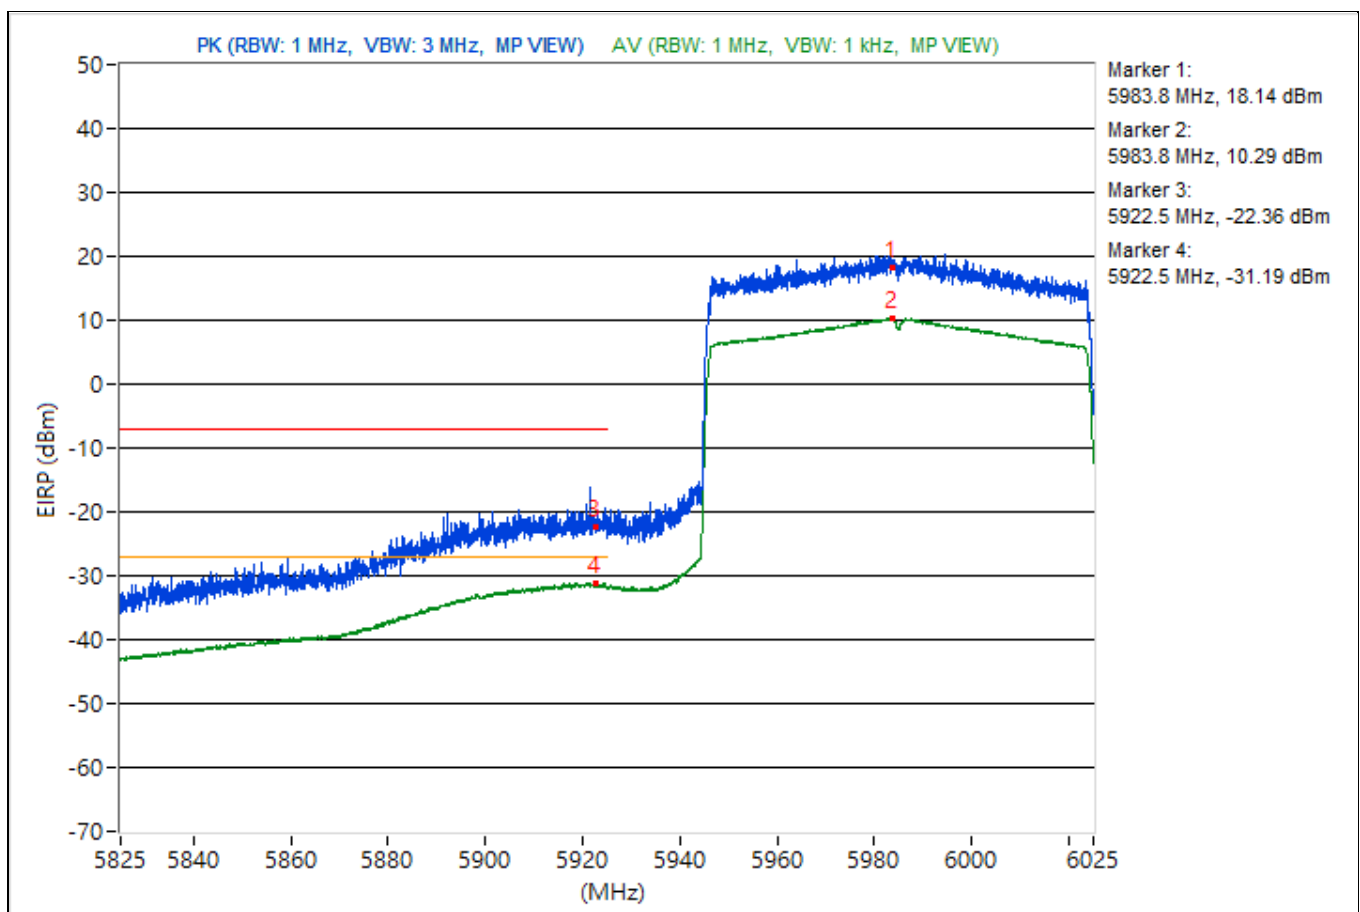


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.68	101.38 PK			-1.33	-2.01	4.76	6.12
2	*6022.68	93.33 AV			-9.31	-10.12	4.76	-1.93
3	#5918.57	58.02 PK	88.26	-30.24	-44.23	-45.96	4.76	-37.24
4	#5918.57	50 AV	68.26	-18.26	-52.17	-54.09	4.76	-45.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

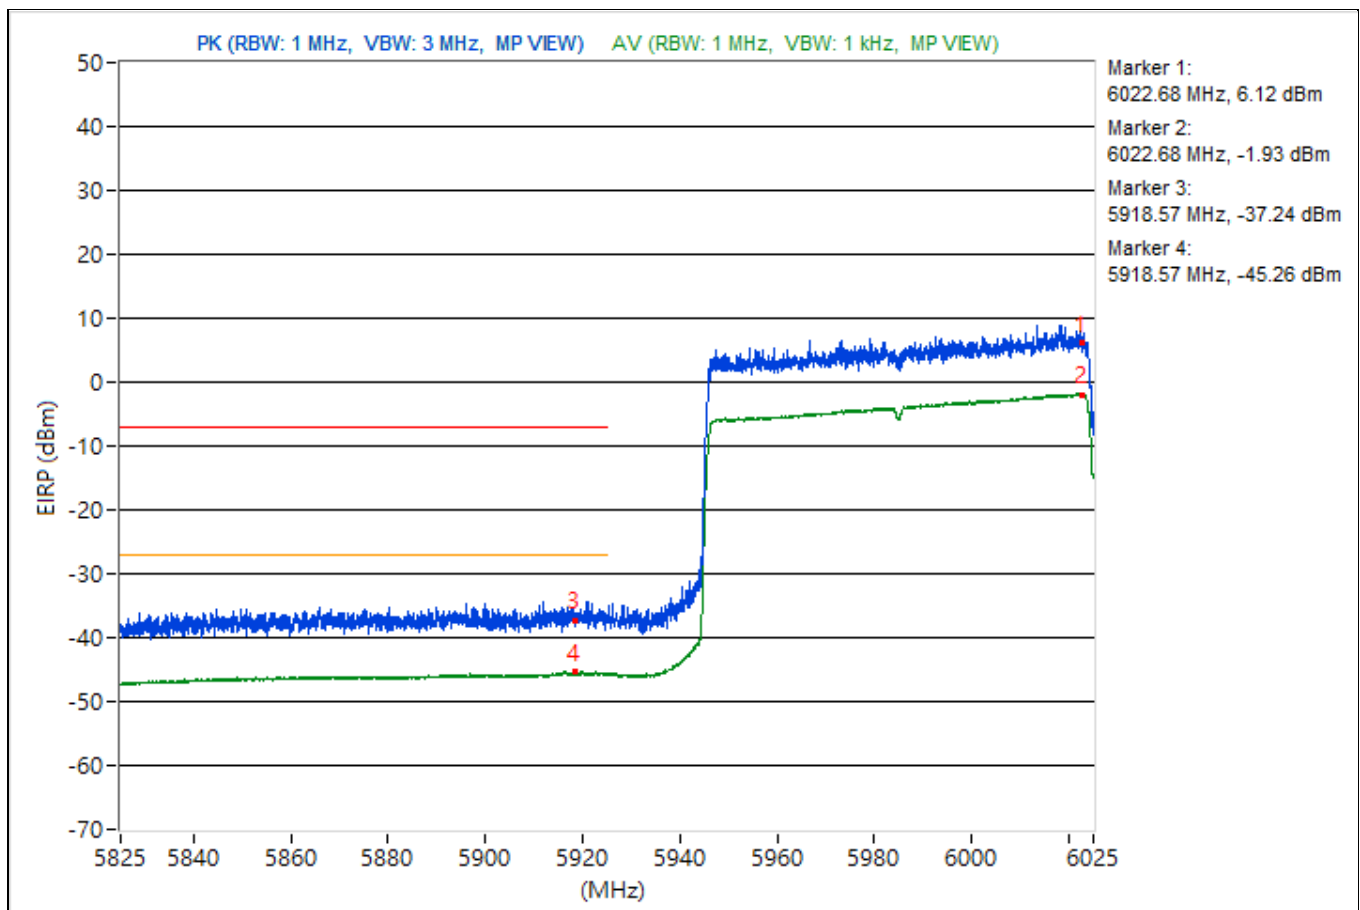


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.37	96.51 PK			-6.5	-6.54	4.76	1.25
2	*5926.37	88.46 AV			-14.09	-15.12	4.76	-6.8
3	#5924.98	87.24 PK	88.26	-1.02	-16.03	-15.56	4.76	-8.02
4	!#5924.98	78.58 AV	68.26	10.32	-24.21	-24.71	4.76	-16.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

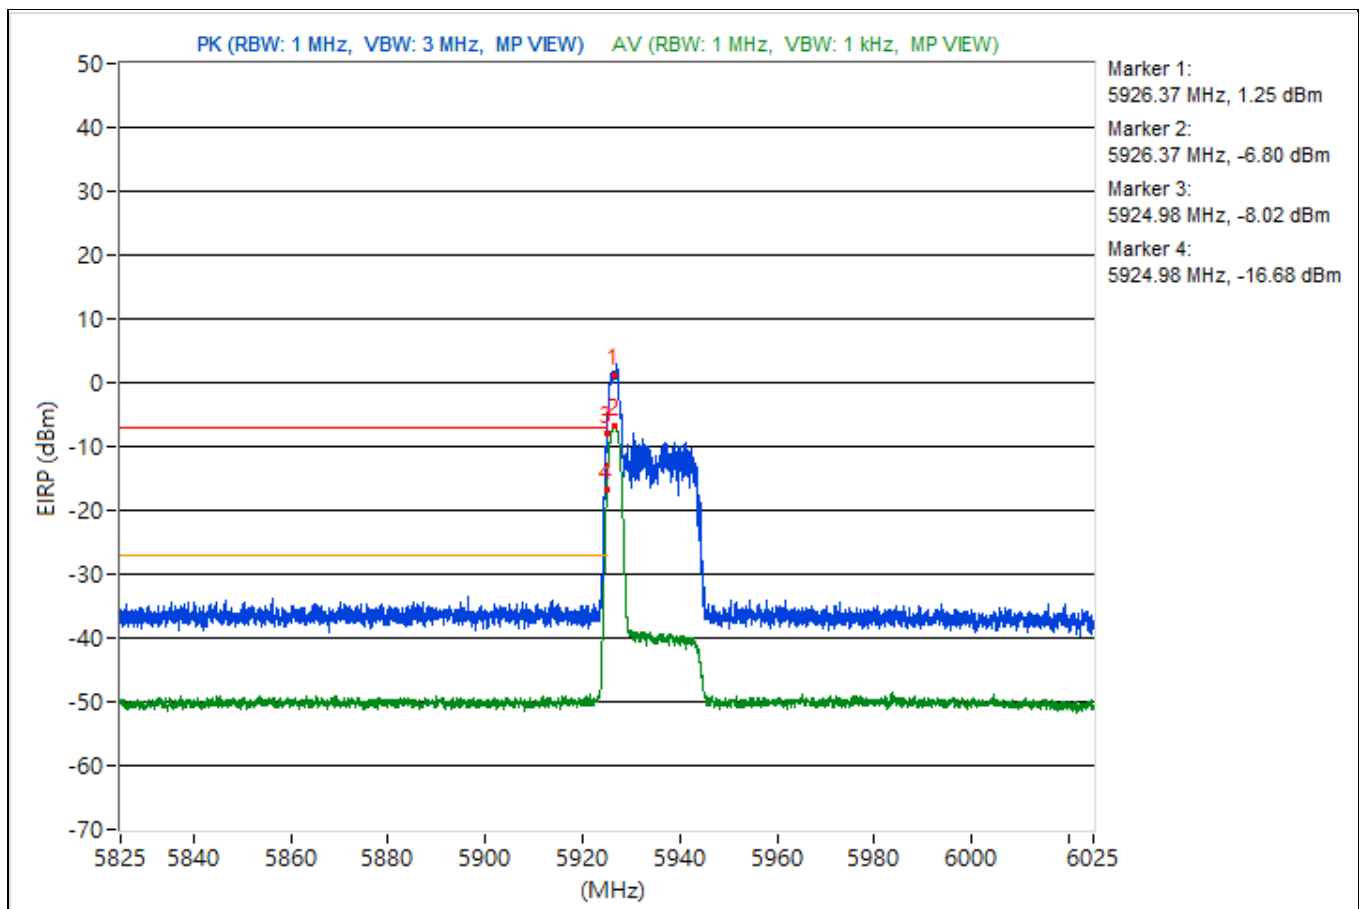


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	57.25 AV	68.2	-10.95	-45.52	-46.06	4.76	-38.01

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

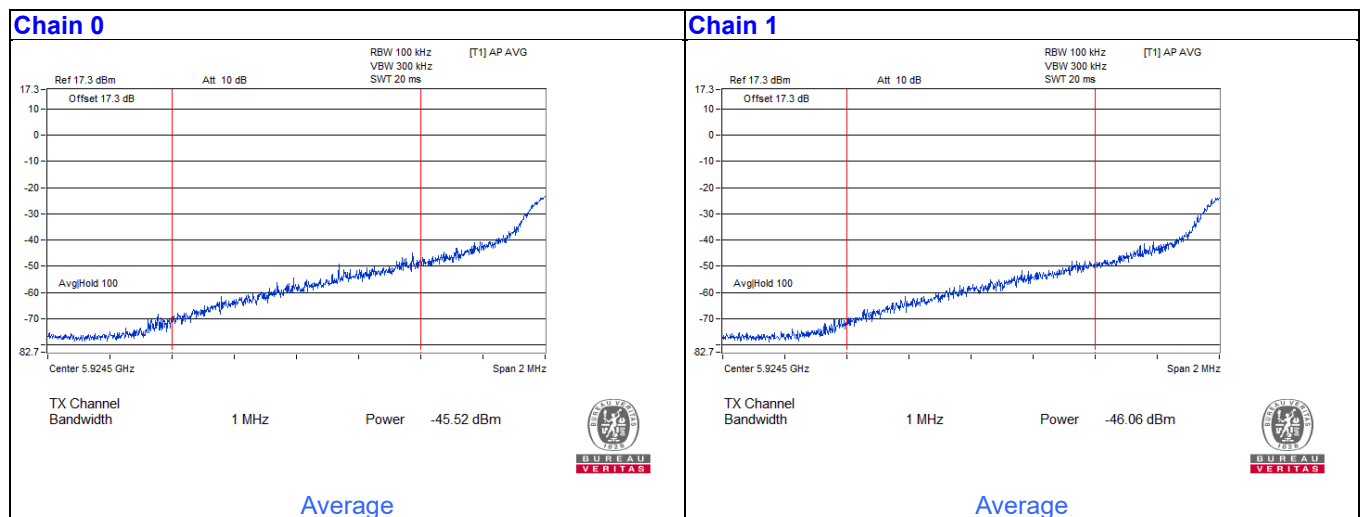


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.4	119.52 PK			15.54	17.28	4.76	24.26
2	*5946.4	111.59 AV			8.51	8.61	4.76	16.33
3	#5920.82	59.57 PK	88.26	-28.69	-43.17	-43.78	4.76	-35.69
4	#5920.82	49.02 AV	68.26	-19.24	-53.44	-54.68	4.76	-46.24

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

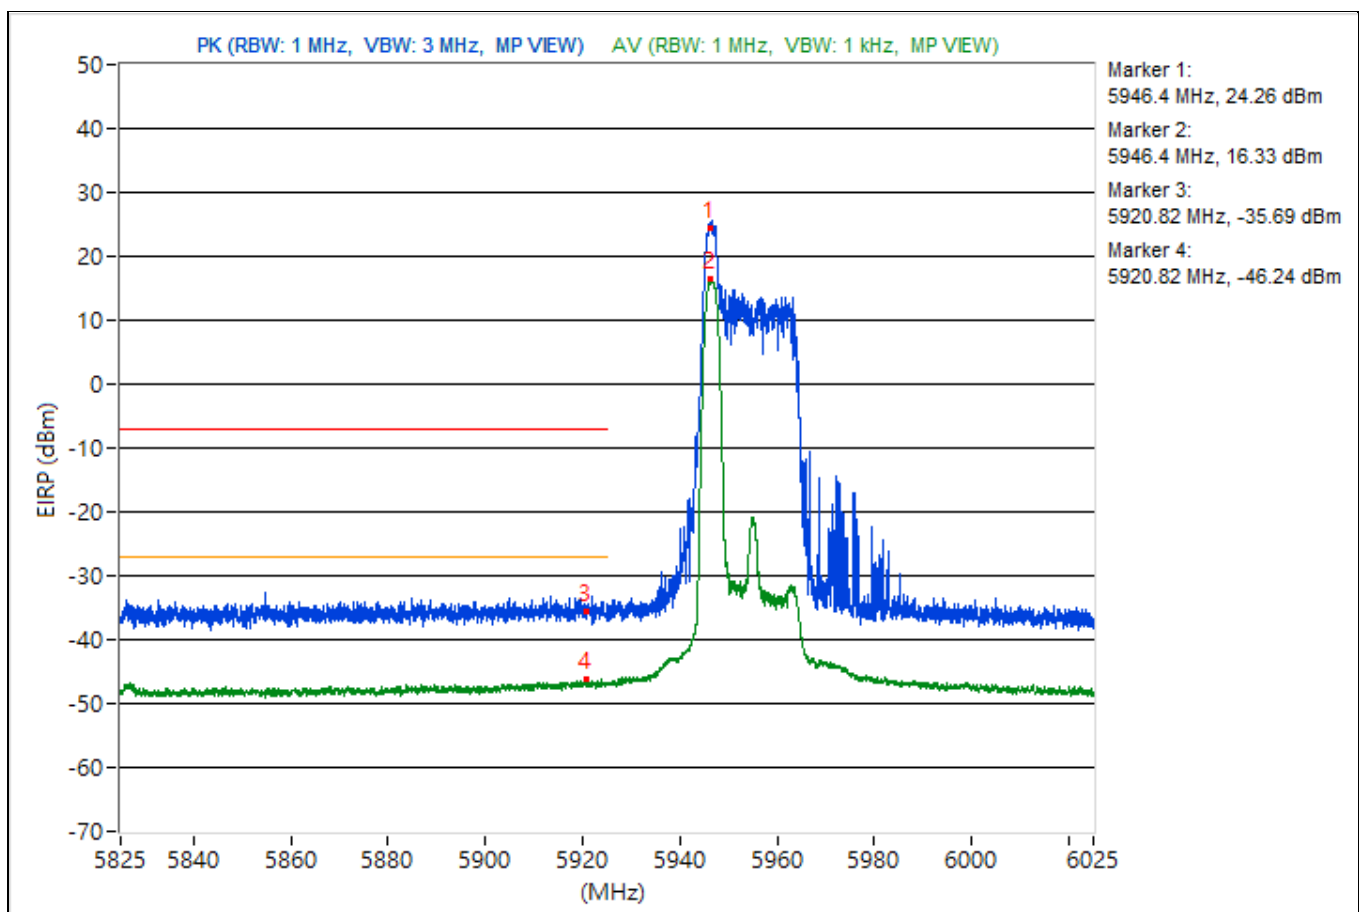


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5927.07	97.16 PK			-4.84	-7.24	4.76	1.79
2	*5927.07	87.68 AV			-15.49	-15.22	4.76	-7.58
3	#5924.98	87.85 PK	88.26	-0.41	-17.33	-13.75	4.76	-7.41
4	!5924.98	78.21 AV	68.26	9.95	-24.96	-24.68	4.76	-17.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

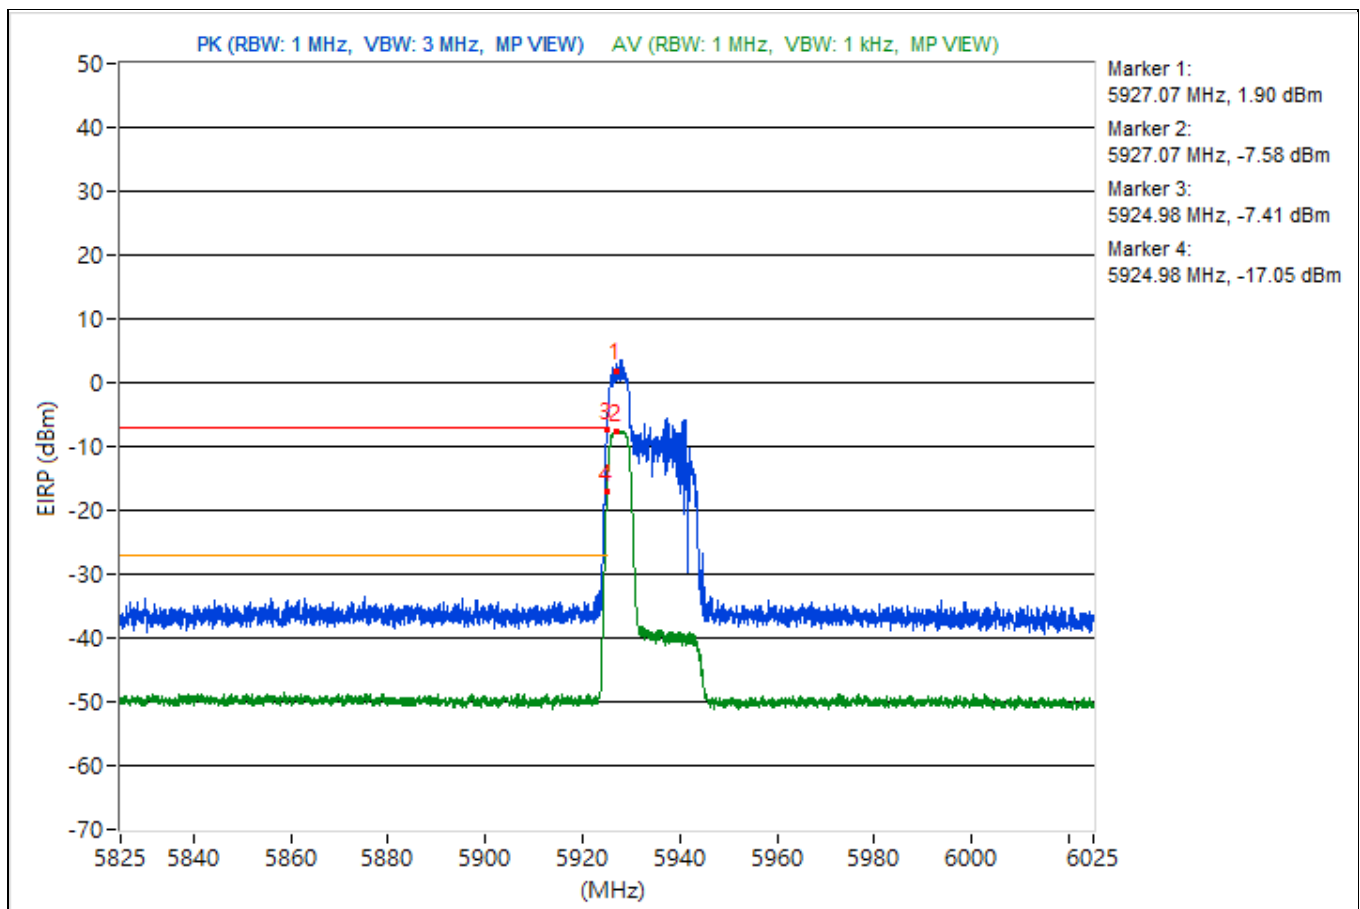


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	56.83 AV	68.2	-11.37	-45.87	-46.55	4.76	-38.43

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

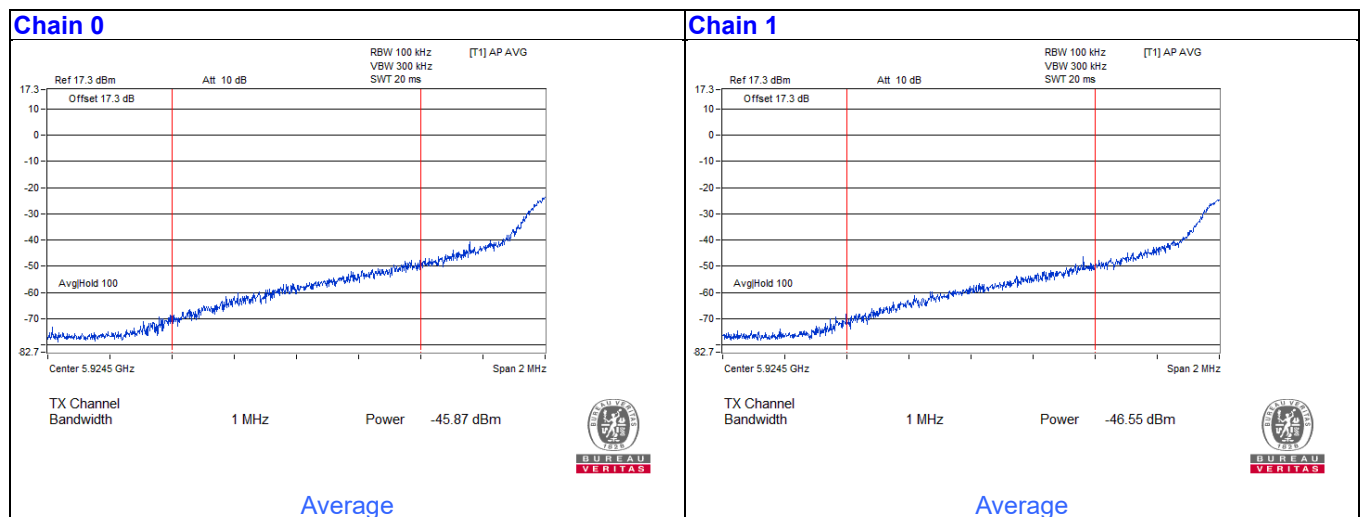


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.07	120.29 PK			17.97	16.4	4.76	25.03
2	*5947.07	111.92 AV			9.11	8.64	4.76	16.66
3	#5924.65	60.8 PK	88.26	-27.46	-42.23	-42.22	4.76	-34.46
4	#5924.65	50.32 AV	68.26	-17.94	-53.16	-52.3	4.76	-44.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

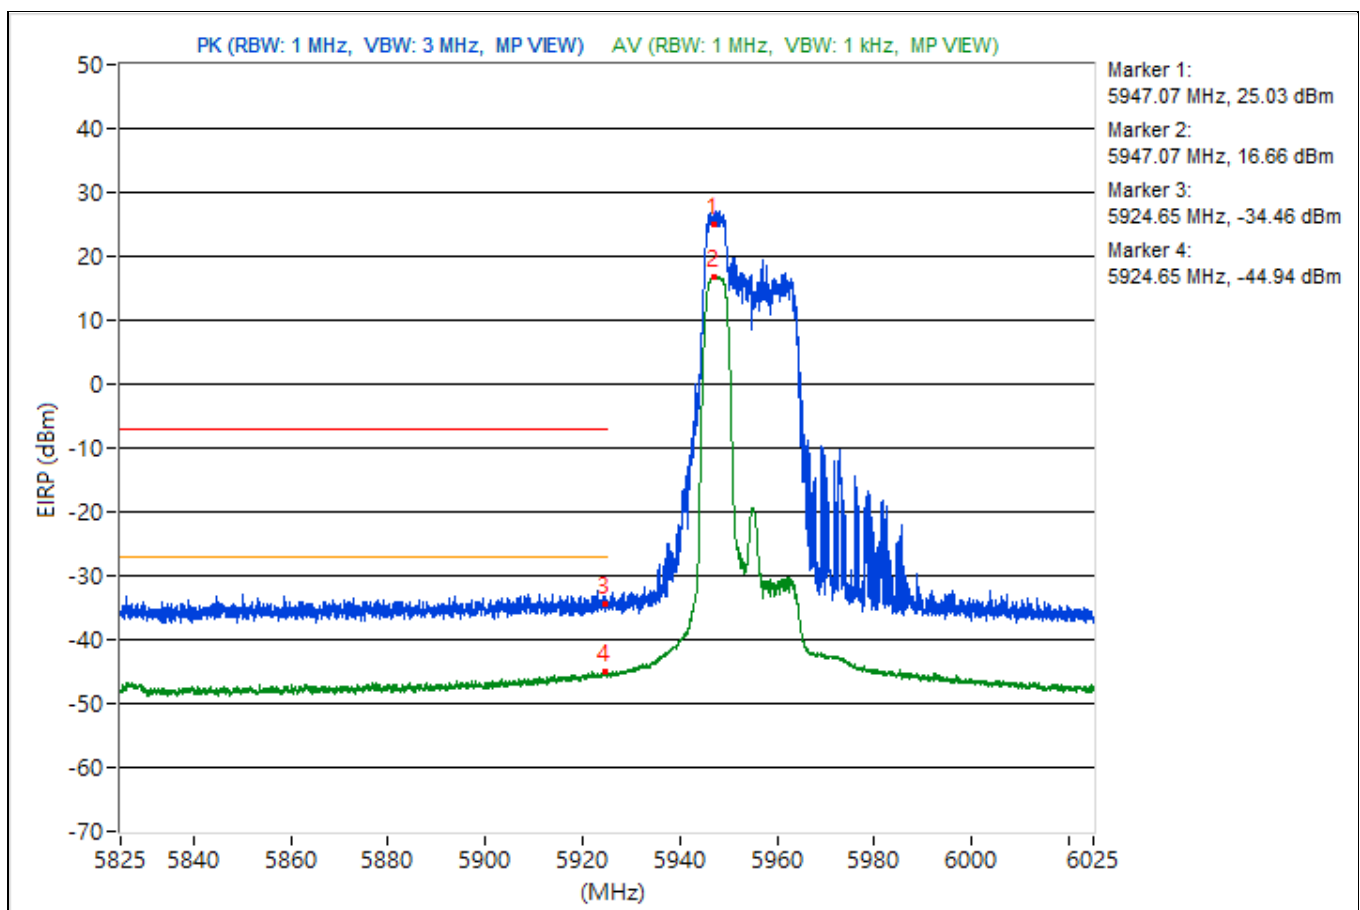


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5928.43	95.41 PK			-7.33	-7.93	4.76	0.15
2	*5928.43	87.73 AV			-14.87	-15.78	4.76	-7.53
3	#5924.98	88.1 PK	88.26	-0.16	-14.57	-15.32	4.76	-7.16
4	!5924.98	78.94 AV	68.26	10.68	-23.84	-24.36	4.76	-16.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

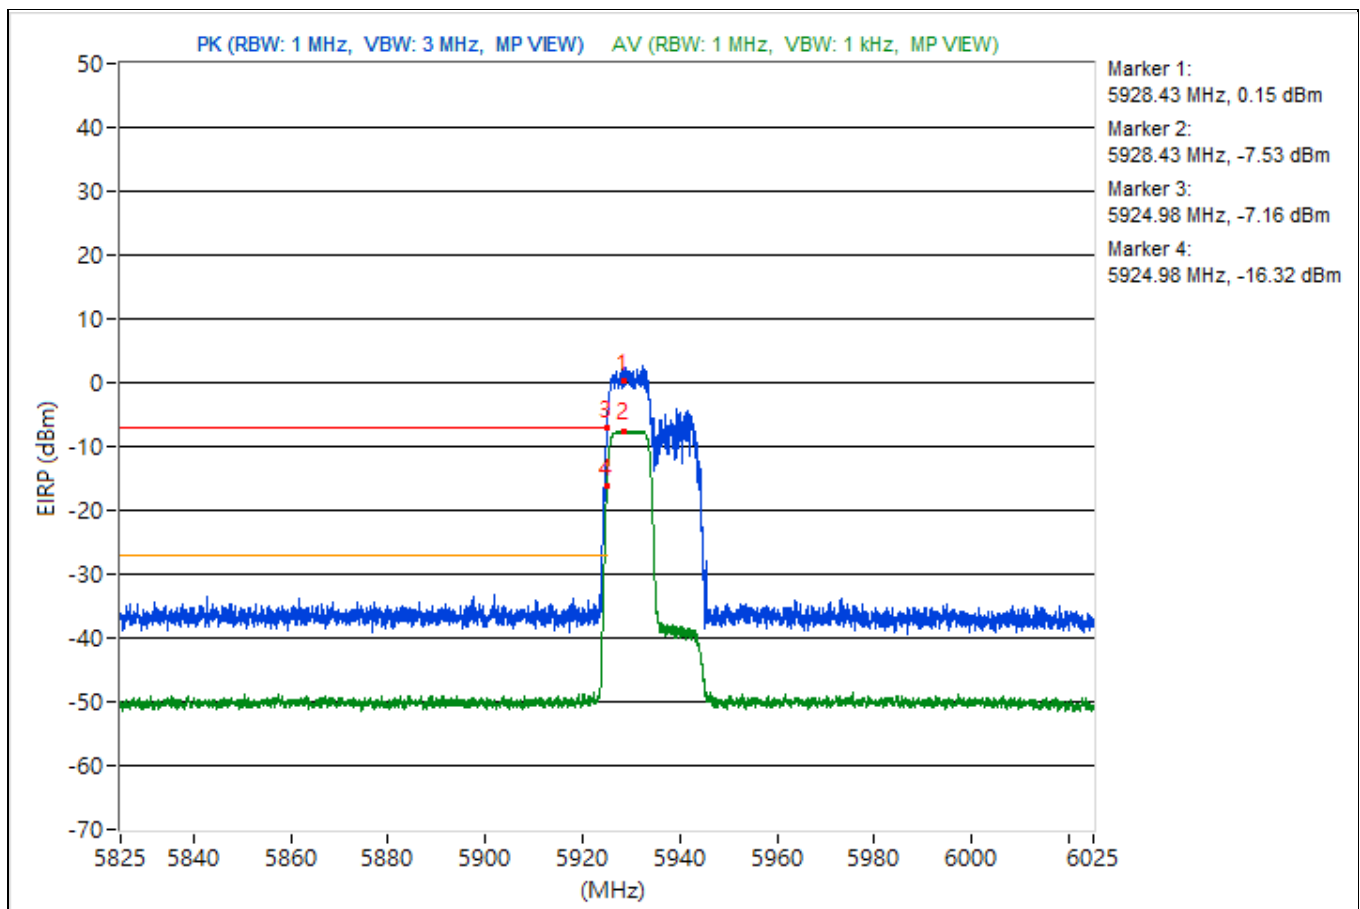


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	57.57 AV	68.2	-10.63	-45.29	-45.64	4.76	-37.69

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

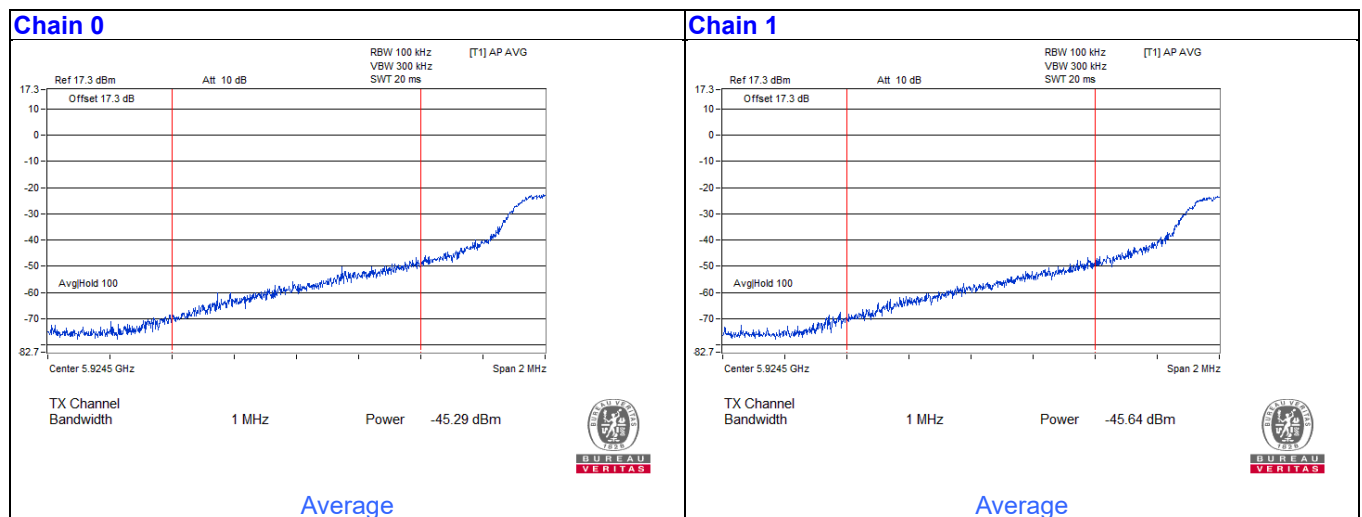


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.12	120.4 PK			17.48	17.27	4.76	25.14
2	*5947.12	112.05 AV			9.06	8.97	4.76	16.79
3	#5924.98	62.69 PK	88.26	-25.57	-40.37	-40.3	4.76	-32.57
4	#5924.98	52.88 AV	68.26	-15.38	-50.09	-50.2	4.76	-42.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

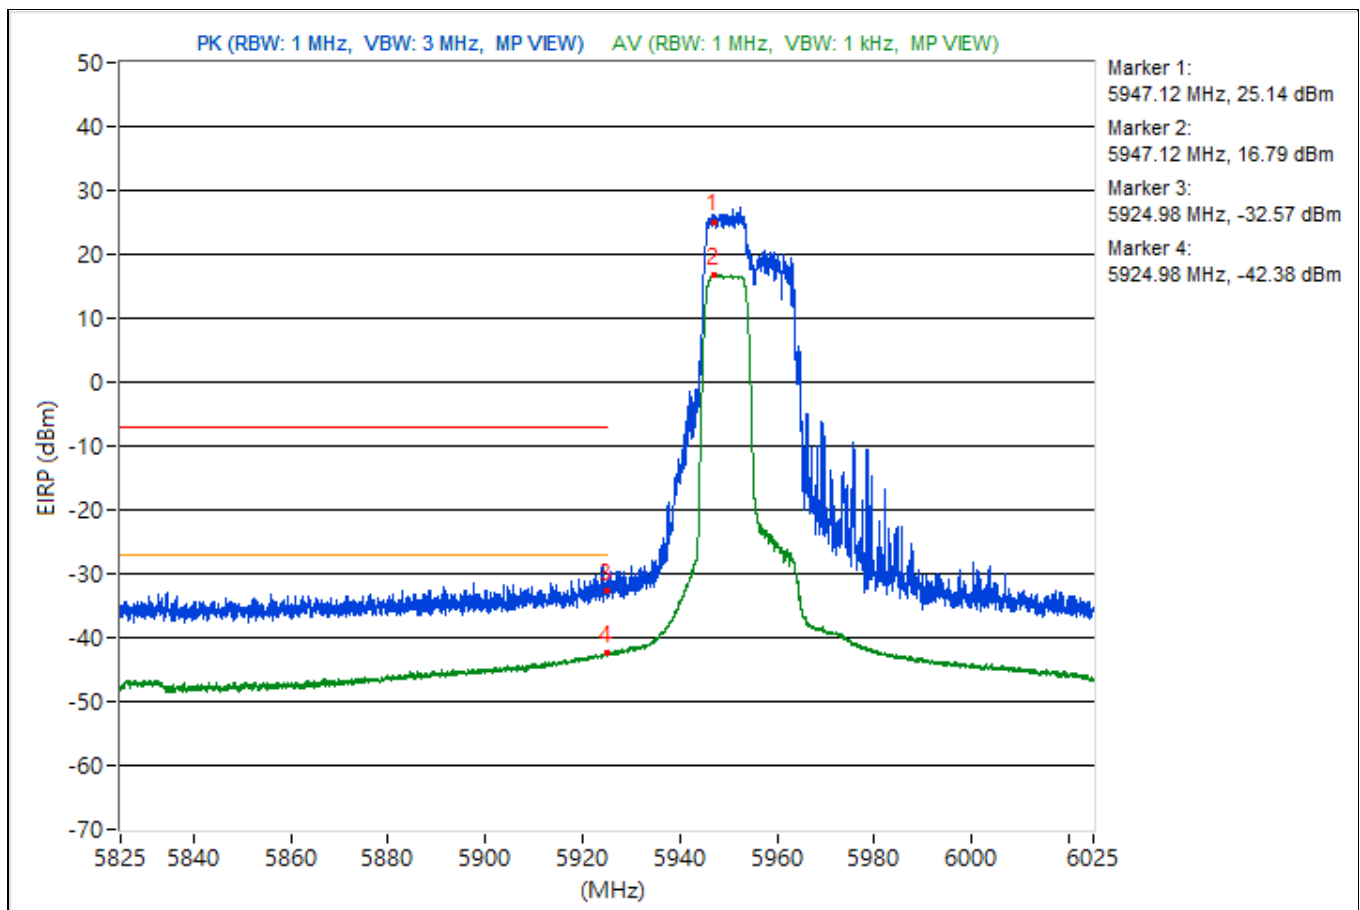


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5932.27	115.12 PK			12.14	12.04	4.76	19.86
2	*5932.27	106.73 AV			3.87	3.53	4.76	11.47
3	#5924.95	87.79 PK	88.26	-0.47	-17.1	-13.95	4.76	-7.47
4	#5924.95	67.96 AV	68.26	-0.3	-34.75	-35.4	4.76	-27.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

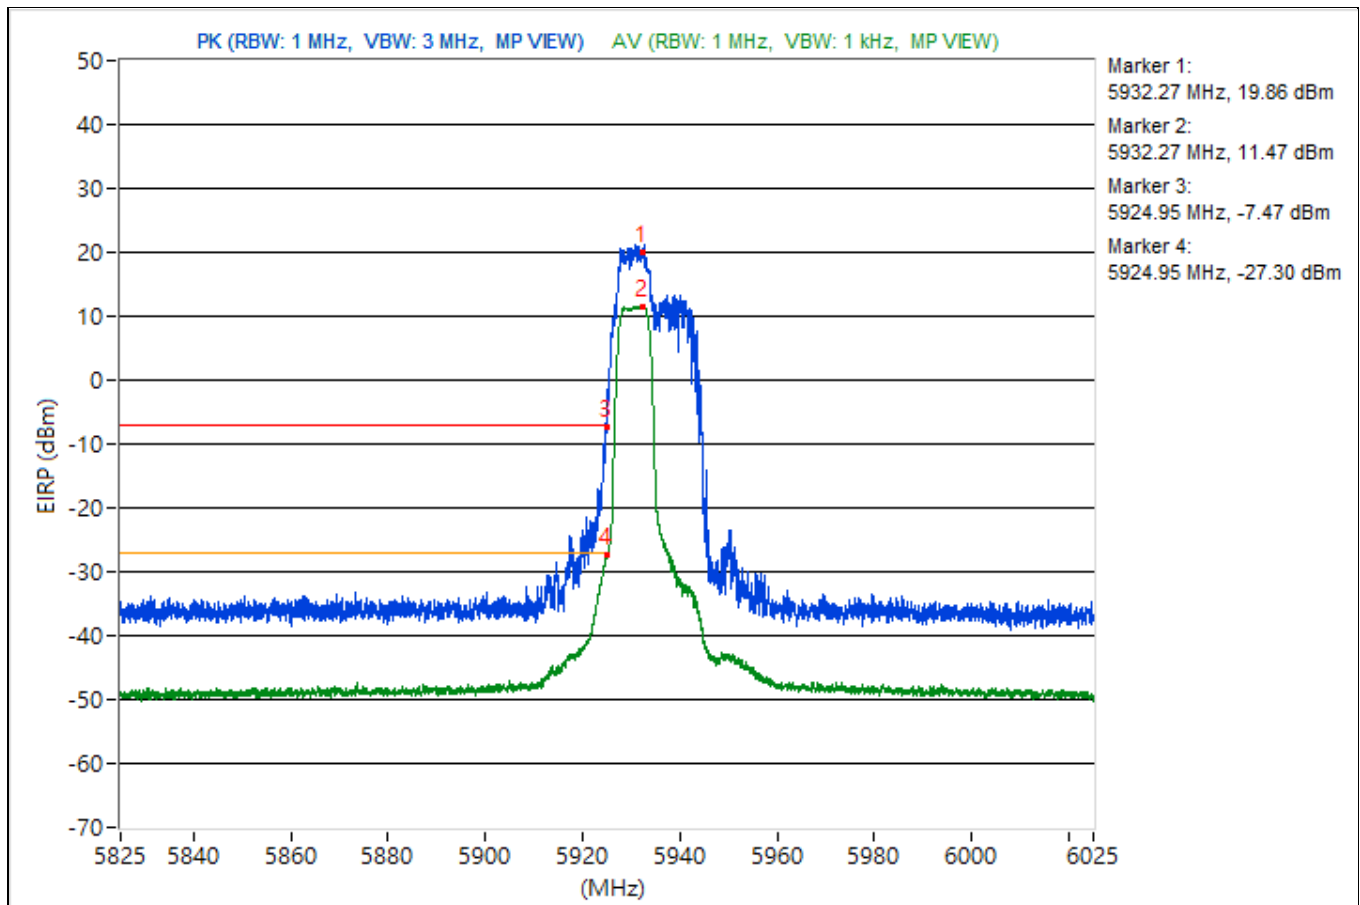


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.62	120.33 PK			17.21	17.4	4.76	25.07
2	*5951.62	111.72 AV			8.69	8.69	4.76	16.46
3	#5924.32	61.18 PK	88.26	-27.08	-41.94	-41.77	4.76	-34.08
4	#5924.32	50.73 AV	68.26	-17.53	-51.79	-52.88	4.76	-44.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

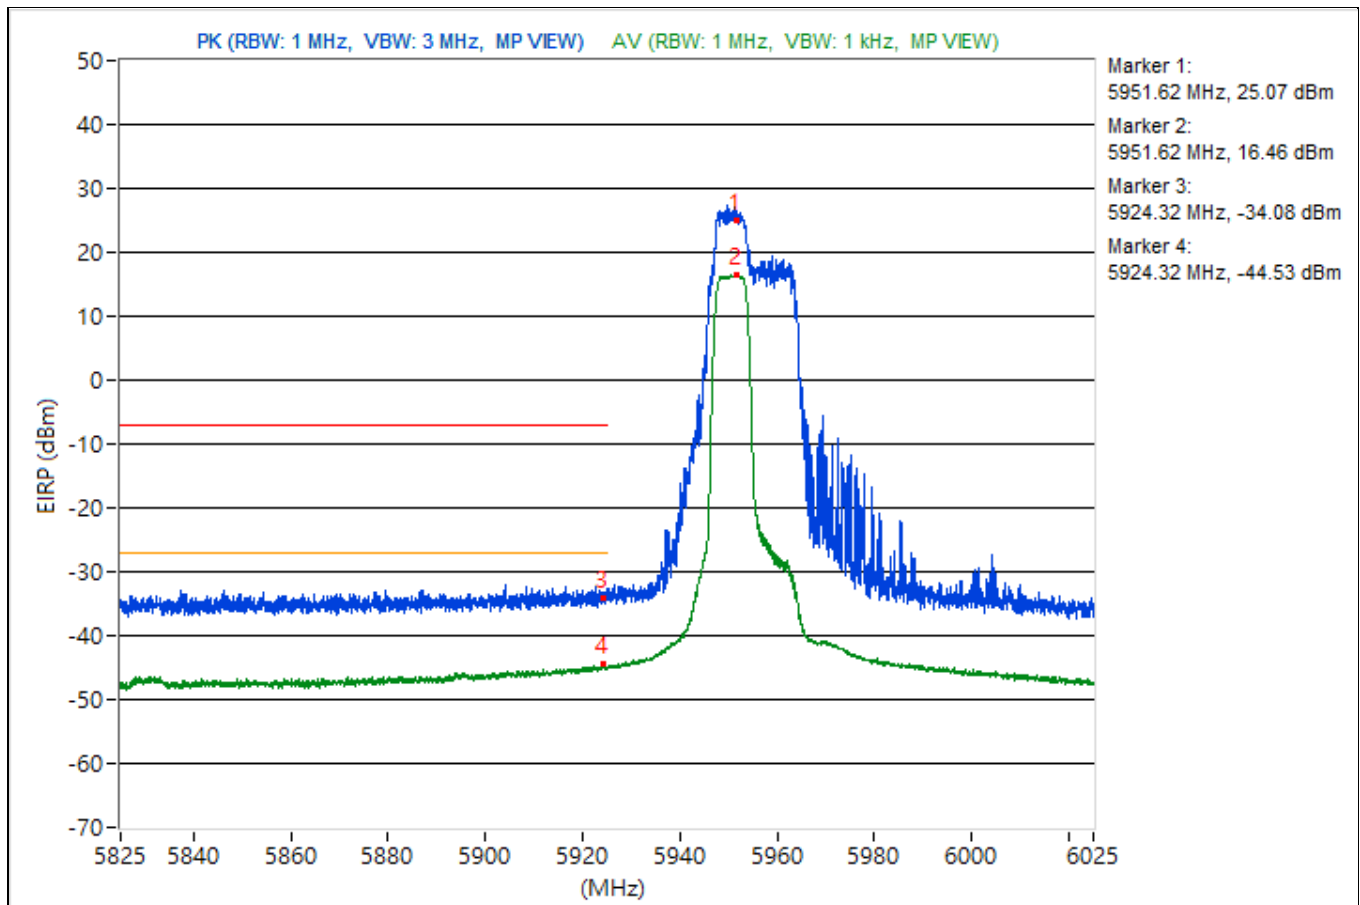


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.8	100.88 PK			-2.53	-1.81	4.76	5.62
2	*5933.8	92.18 AV			-10.8	-10.9	4.76	-3.08
3	#5924.98	87.44 PK	88.26	-0.82	-15.69	-15.48	4.76	-7.82
4	!#5924.98	79.67 AV	68.26	11.41	-23.44	-23.27	4.76	-15.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

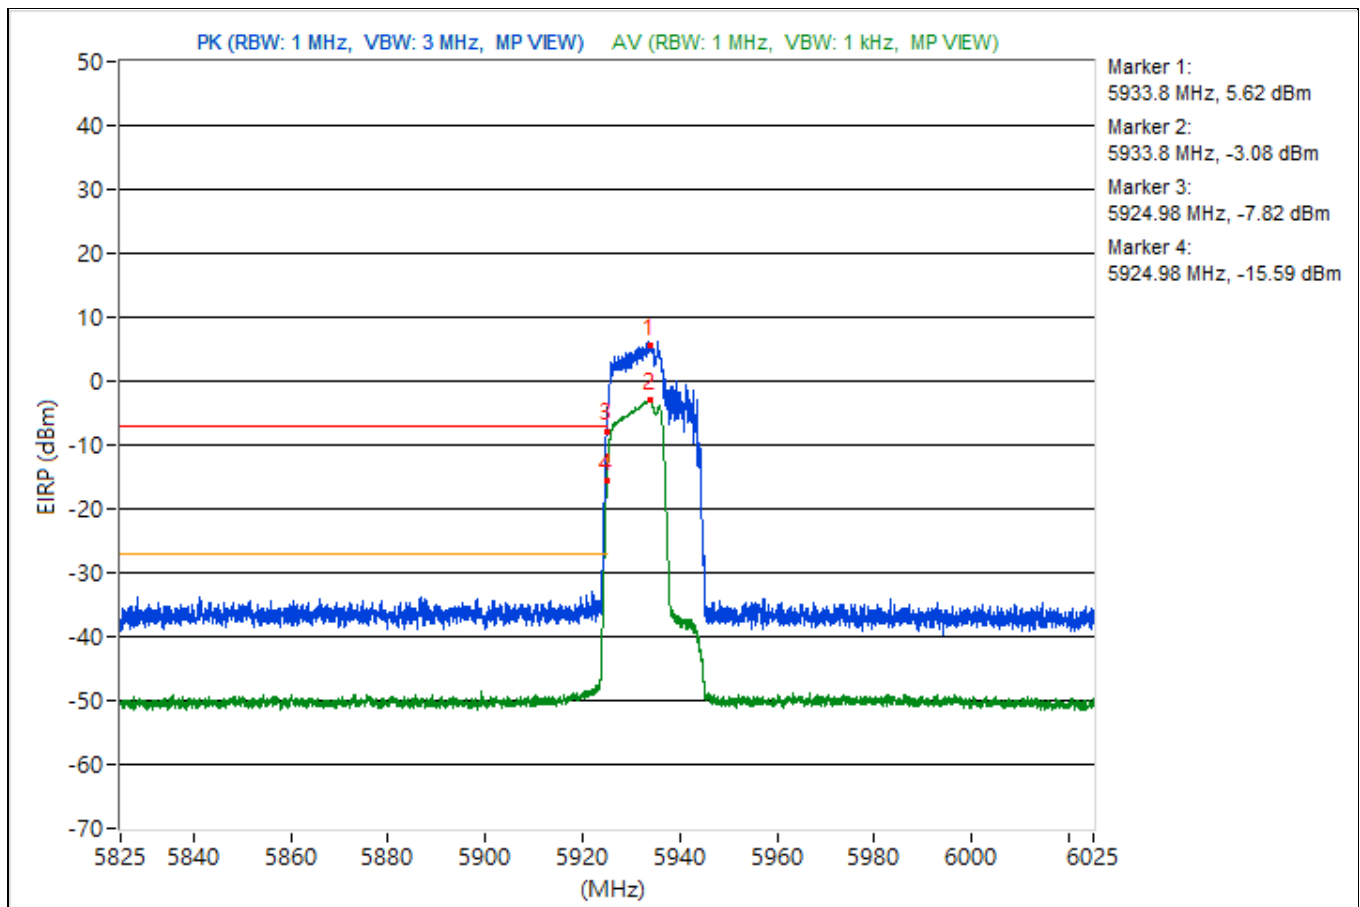


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	49.25 AV	68.2	-18.95	-53.65	-53.91	4.76	-46.01

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

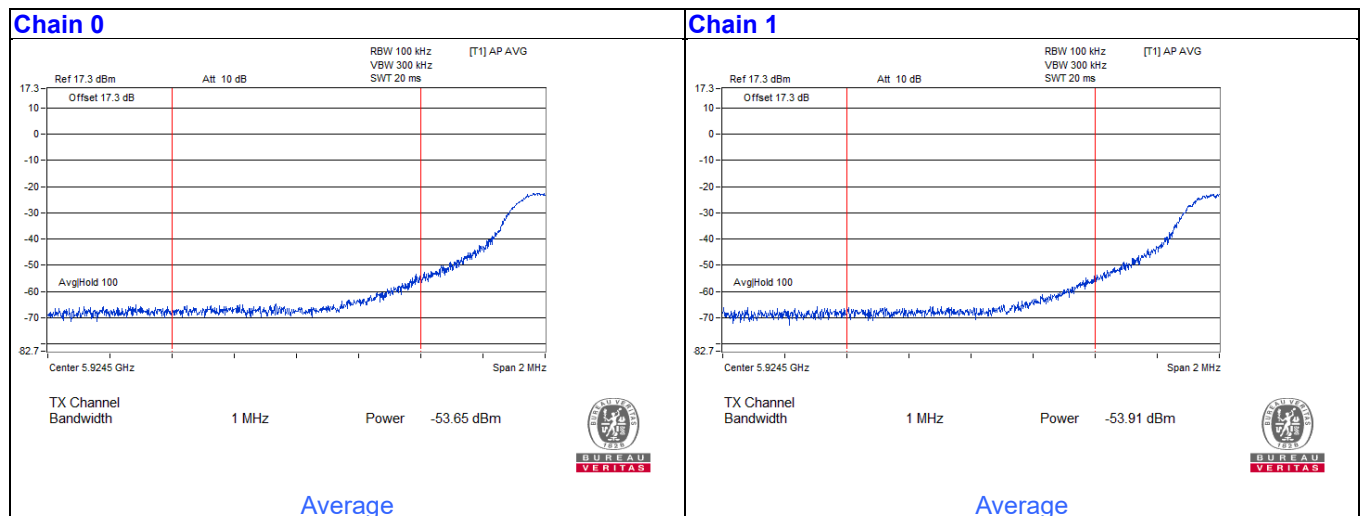


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.02	121.87 PK			18.8	18.88	4.76	26.61
2	*5954.02	112.46 AV			9.37	9.49	4.76	17.2
3	#5924.95	62.82 PK	88.26	-25.44	-43.84	-38.27	4.76	-32.44
4	#5924.95	52.42 AV	68.26	-15.84	-50.75	-50.47	4.76	-42.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

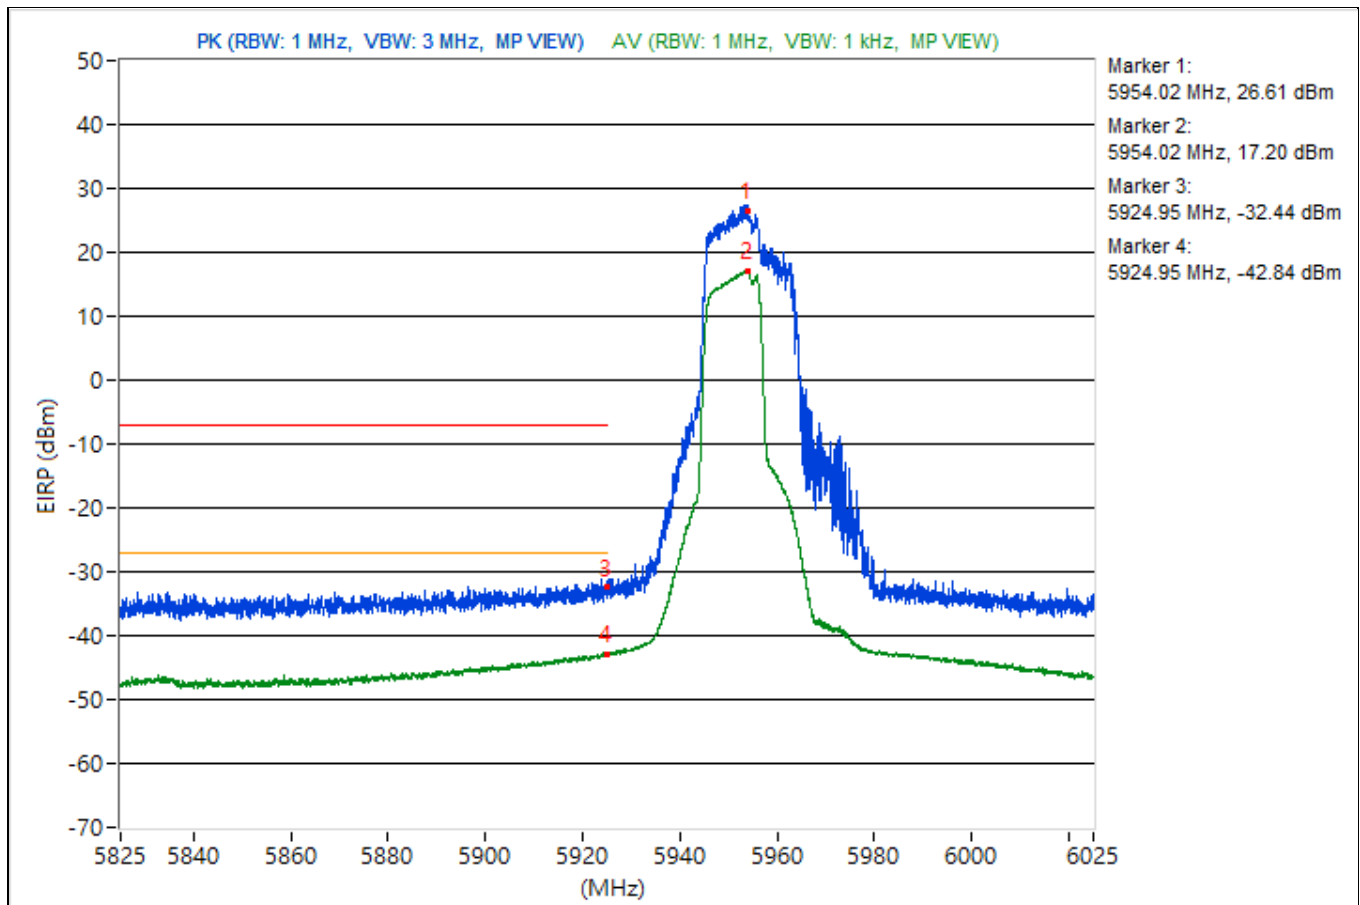


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.6	112.44 PK			9.62	9.18	4.76	17.18
2	*5982.6	104.05 AV			1.23	0.81	4.76	8.79
3	#5924.77	68.63 PK	88.26	-19.63	-33.68	-35.25	4.76	-26.63
4	#5924.77	58.54 AV	68.26	-9.72	-43.96	-45.09	4.76	-36.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

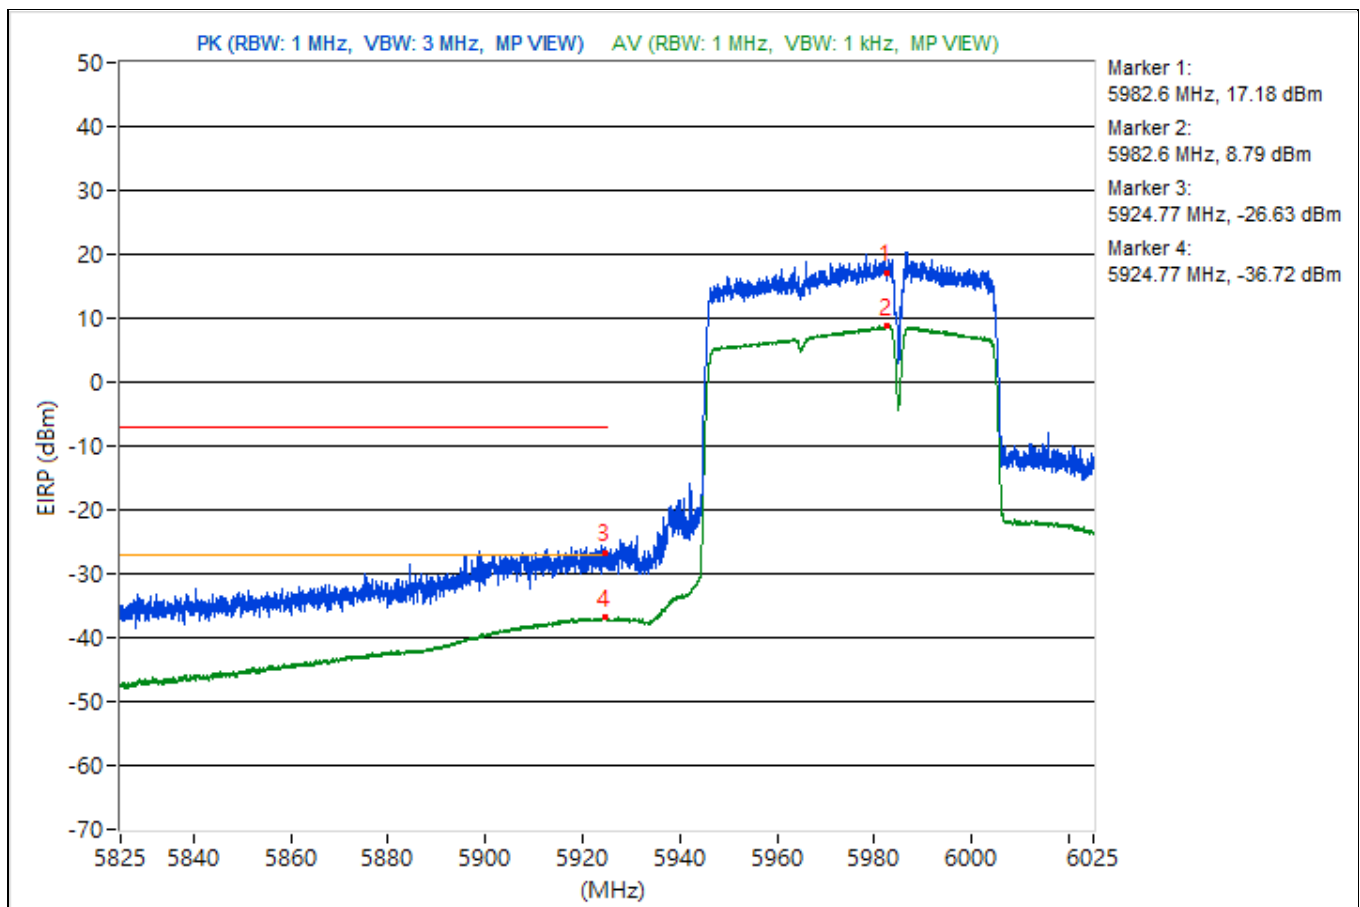


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.45	112.66 PK			8.5	10.54	4.76	17.4
2	*6022.45	102.26 AV			-1.08	-0.48	4.76	7
3	#5923	75.94 PK	88.26	-12.32	-28.85	-25.85	4.76	-19.32
4	#5923	67.43 AV	68.26	-0.83	-37.85	-34.13	4.76	-27.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

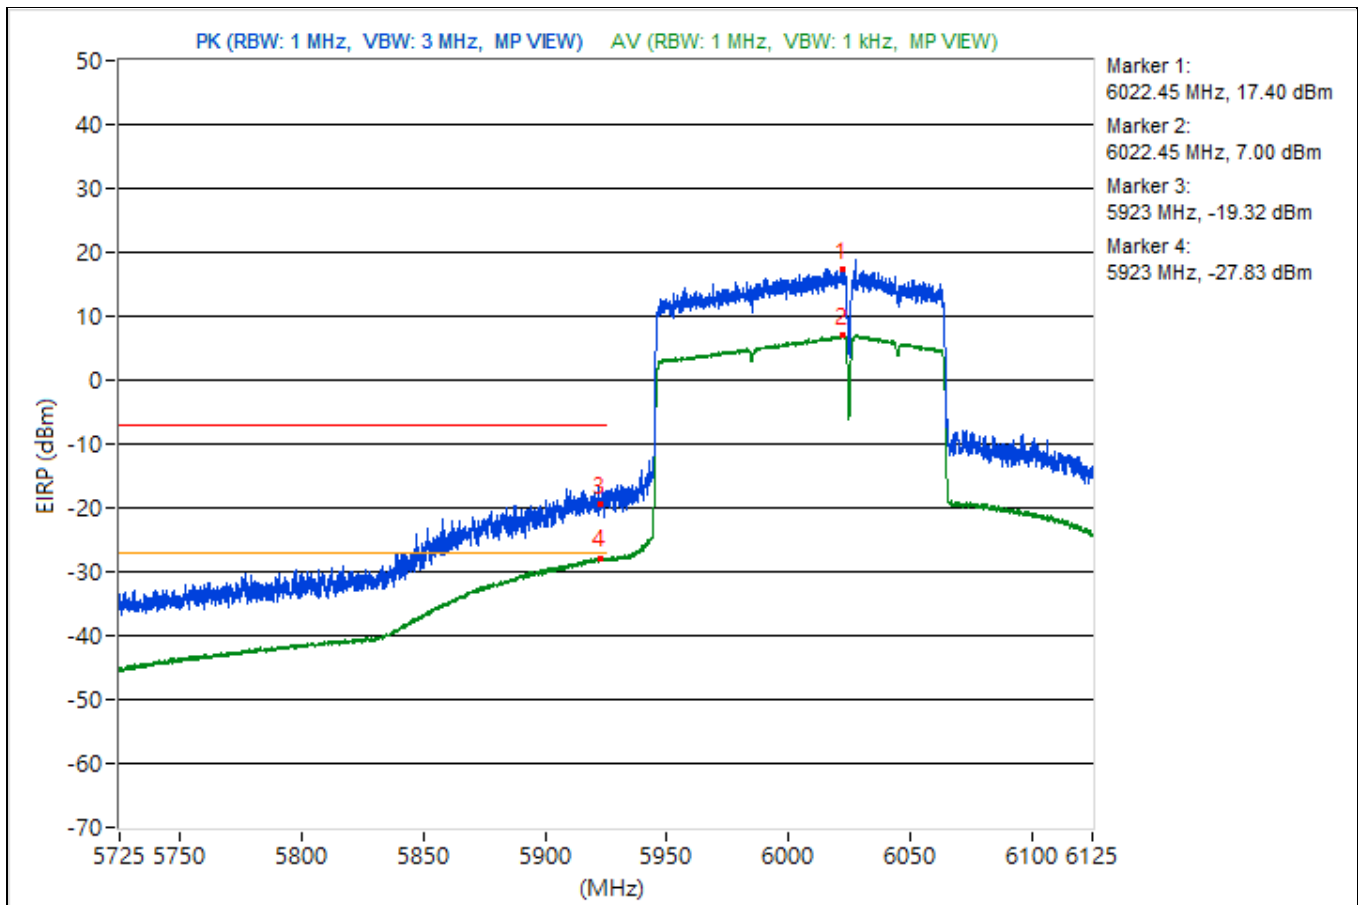


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6027.45	109.9 PK			6.96	6.77	4.76	14.64
2	*6027.45	101.49 AV			-1.37	-1.71	4.76	6.23
3	#5924.7	76.23 PK	88.26	-12.03	-25.61	-28.46	4.76	-19.03
4	#5924.7	66.87 AV	68.26	-1.39	-36.31	-36	4.76	-28.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

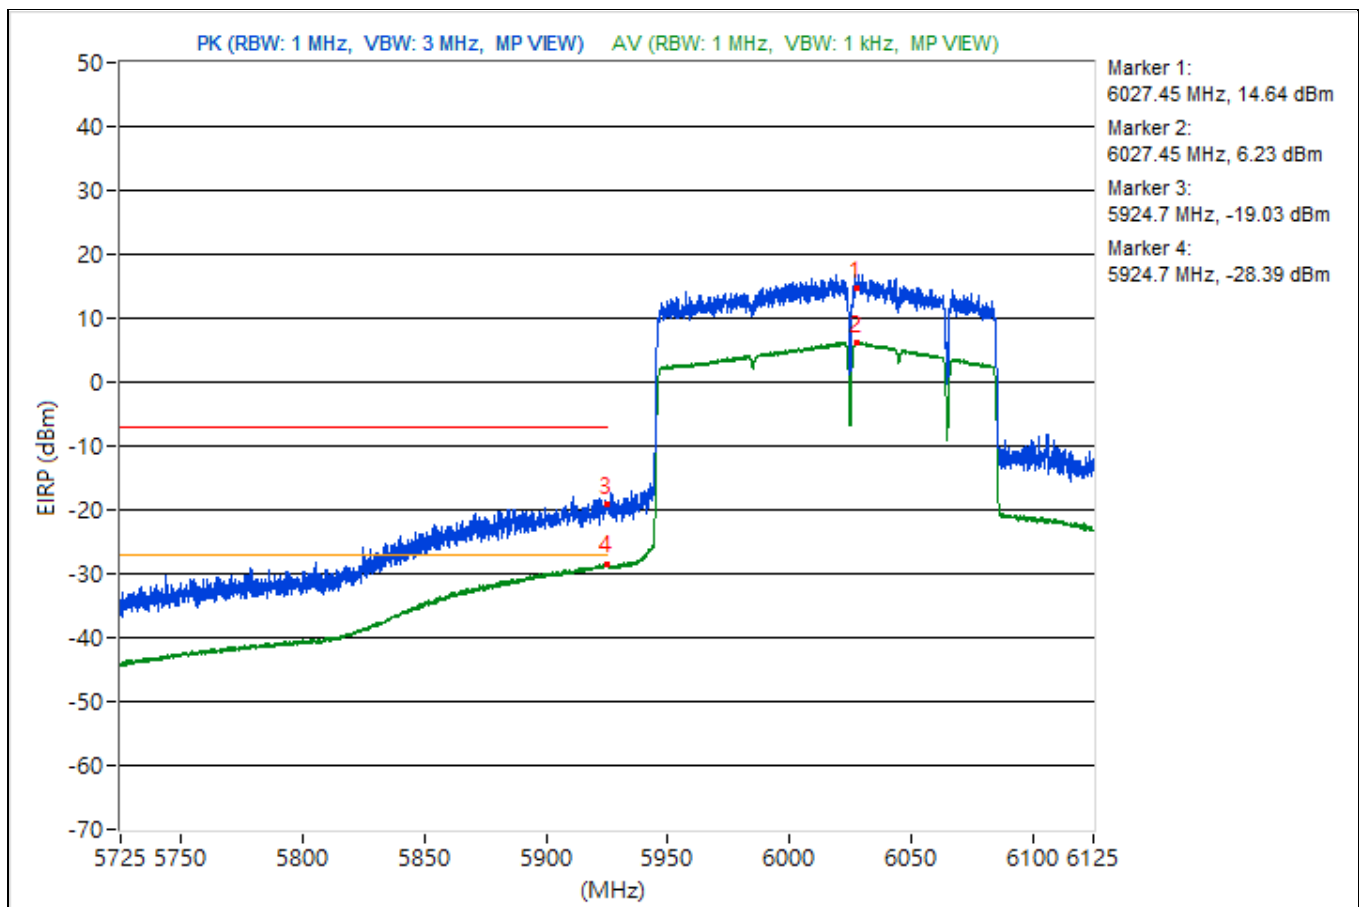

under control of a Standard Power AP
Mode B
1TX

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.2 PK	74.0	-28.8	2.38 H	148	33.6	11.6
2	11870.00	35.6 AV	54.0	-18.4	2.38 H	148	24.0	11.6
3	17805.00	48.8 PK	74.0	-25.2	3.27 H	206	27.0	21.8
4	17805.00	38.2 AV	54.0	-15.8	3.27 H	206	16.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.4 PK	74.0	-27.6	2.60 V	216	34.8	11.6
2	11870.00	36.4 AV	54.0	-17.6	2.60 V	216	24.8	11.6
3	17805.00	52.2 PK	74.0	-21.8	1.14 V	168	30.4	21.8
4	17805.00	41.5 AV	54.0	-12.5	1.14 V	168	19.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.0 PK	74.0	-29.0	2.35 H	159	33.5	11.5
2	11910.00	35.2 AV	54.0	-18.8	2.35 H	159	23.7	11.5
3	17865.00	49.4 PK	74.0	-24.6	3.30 H	206	26.2	23.2
4	17865.00	38.6 AV	54.0	-15.4	3.30 H	206	15.4	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.3 PK	74.0	-27.7	2.55 V	210	34.8	11.5
2	11910.00	36.0 AV	54.0	-18.0	2.55 V	210	24.5	11.5
3	17865.00	52.1 PK	74.0	-21.9	1.15 V	155	28.9	23.2
4	17865.00	41.3 AV	54.0	-12.7	1.15 V	155	18.1	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	45.3 PK	74.0	-28.7	2.31 H	162	33.2	12.1
2	12350.00	35.3 AV	54.0	-18.7	2.31 H	162	23.2	12.1
3	18525.00	49.4 PK	74.0	-24.6	3.35 H	207	53.3	-3.9
4	18525.00	38.5 AV	54.0	-15.5	3.35 H	207	42.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.8 PK	74.0	-27.2	2.60 V	219	34.7	12.1
2	12350.00	36.4 AV	54.0	-17.6	2.60 V	219	24.3	12.1
3	18525.00	51.9 PK	74.0	-22.1	1.19 V	163	55.8	-3.9
4	18525.00	41.3 AV	54.0	-12.7	1.19 V	163	45.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.4 PK	88.2	-43.8	2.33 H	172	32.5	11.9
2	#12830.00	34.9 AV	68.2	-33.3	2.33 H	172	23.0	11.9
3	19245.00	49.5 PK	74.0	-24.5	3.32 H	202	53.4	-3.9
4	19245.00	38.8 AV	54.0	-15.2	3.32 H	202	42.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.4 PK	88.2	-41.8	2.56 V	223	34.5	11.9
2	#12830.00	35.9 AV	68.2	-32.3	2.56 V	223	24.0	11.9
3	19245.00	51.6 PK	74.0	-22.4	1.20 V	165	55.5	-3.9
4	19245.00	41.0 AV	54.0	-13.0	1.20 V	165	44.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.7 PK	88.2	-43.5	2.32 H	160	32.3	12.4
2	#13070.00	35.0 AV	68.2	-33.2	2.32 H	160	22.6	12.4
3	19605.00	49.7 PK	74.0	-24.3	3.35 H	198	53.3	-3.6
4	19605.00	39.0 AV	54.0	-15.0	3.35 H	198	42.6	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.8 PK	88.2	-42.4	2.52 V	198	33.4	12.4
2	#13070.00	35.8 AV	68.2	-32.4	2.52 V	198	23.4	12.4
3	19605.00	51.9 PK	74.0	-22.1	1.12 V	149	55.5	-3.6
4	19605.00	41.0 AV	54.0	-13.0	1.12 V	149	44.6	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	45.0 PK	74.0	-29.0	2.31 H	169	31.8	13.2
2	13390.00	35.2 AV	54.0	-18.8	2.31 H	169	22.0	13.2
3	20085.00	49.7 PK	74.0	-24.3	3.33 H	191	53.0	-3.3
4	20085.00	38.6 AV	54.0	-15.4	3.33 H	191	41.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.1 PK	74.0	-27.9	2.57 V	205	32.9	13.2
2	13390.00	35.8 AV	54.0	-18.2	2.57 V	205	22.6	13.2
3	20085.00	51.8 PK	74.0	-22.2	1.20 V	154	55.1	-3.3
4	20085.00	41.1 AV	54.0	-12.9	1.20 V	154	44.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.8 PK	88.2	-43.4	2.31 H	169	30.7	14.1
2	#13710.00	35.3 AV	68.2	-32.9	2.31 H	169	21.2	14.1
3	20565.00	49.8 PK	74.0	-24.2	3.33 H	212	52.7	-2.9
4	20565.00	38.9 AV	54.0	-15.1	3.33 H	212	41.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.5 PK	88.2	-41.7	2.51 V	216	32.4	14.1
2	#13710.00	36.2 AV	68.2	-32.0	2.51 V	216	22.1	14.1
3	20565.00	51.9 PK	74.0	-22.1	1.12 V	157	54.8	-2.9
4	20565.00	41.3 AV	54.0	-12.7	1.12 V	157	44.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.5 PK	74.0	-28.5	2.35 H	149	33.9	11.6
2	11870.00	35.5 AV	54.0	-18.5	2.35 H	149	23.9	11.6
3	17805.00	49.7 PK	74.0	-24.3	3.28 H	231	27.9	21.8
4	17805.00	39.1 AV	54.0	-14.9	3.28 H	231	17.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.7 PK	74.0	-28.3	2.52 V	215	34.2	11.5
2	11910.00	35.6 AV	54.0	-18.4	2.52 V	215	24.1	11.5
3	17865.00	51.8 PK	74.0	-22.2	1.15 V	140	28.6	23.2
4	17865.00	40.9 AV	54.0	-13.1	1.15 V	140	17.7	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.2 PK	74.0	-28.8	2.35 H	164	33.7	11.5
2	11910.00	35.4 AV	54.0	-18.6	2.35 H	164	23.9	11.5
3	17865.00	49.7 PK	74.0	-24.3	3.25 H	217	26.5	23.2
4	17865.00	39.1 AV	54.0	-14.9	3.25 H	217	15.9	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.7 PK	74.0	-28.3	2.52 V	215	34.2	11.5
2	11910.00	35.6 AV	54.0	-18.4	2.52 V	215	24.1	11.5
3	17865.00	51.8 PK	74.0	-22.2	1.15 V	140	28.6	23.2
4	17865.00	40.9 AV	54.0	-13.1	1.15 V	140	17.7	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	44.9 PK	74.0	-29.1	2.30 H	150	32.8	12.1
2	12350.00	35.0 AV	54.0	-19.0	2.30 H	150	22.9	12.1
3	18525.00	49.4 PK	74.0	-24.6	3.35 H	206	53.3	-3.9
4	18525.00	38.7 AV	54.0	-15.3	3.35 H	206	42.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	45.9 PK	74.0	-28.1	2.53 V	226	33.8	12.1
2	12350.00	35.5 AV	54.0	-18.5	2.53 V	226	23.4	12.1
3	18525.00	52.0 PK	74.0	-22.0	1.19 V	145	55.9	-3.9
4	18525.00	41.2 AV	54.0	-12.8	1.19 V	145	45.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.3 PK	88.2	-42.9	2.35 H	156	33.4	11.9
2	#12830.00	35.5 AV	68.2	-32.7	2.35 H	156	23.6	11.9
3	19245.00	49.6 PK	74.0	-24.4	3.31 H	193	53.5	-3.9
4	19245.00	38.7 AV	54.0	-15.3	3.31 H	193	42.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.5 PK	88.2	-41.7	2.59 V	210	34.6	11.9
2	#12830.00	36.1 AV	68.2	-32.1	2.59 V	210	24.2	11.9
3	19245.00	52.3 PK	74.0	-21.7	1.17 V	167	56.2	-3.9
4	19245.00	41.5 AV	54.0	-12.5	1.17 V	167	45.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.8 PK	88.2	-43.4	2.30 H	148	32.4	12.4
2	#13070.00	35.1 AV	68.2	-33.1	2.30 H	148	22.7	12.4
3	19605.00	49.7 PK	74.0	-24.3	3.34 H	192	53.3	-3.6
4	19605.00	39.1 AV	54.0	-14.9	3.34 H	192	42.7	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.7 PK	88.2	-42.5	2.60 V	224	33.3	12.4
2	#13070.00	35.7 AV	68.2	-32.5	2.60 V	224	23.3	12.4
3	19605.00	52.2 PK	74.0	-21.8	1.20 V	156	55.8	-3.6
4	19605.00	41.3 AV	54.0	-12.7	1.20 V	156	44.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	45.2 PK	74.0	-28.8	2.30 H	166	32.0	13.2
2	13390.00	35.6 AV	54.0	-18.4	2.30 H	166	22.4	13.2
3	20085.00	49.2 PK	74.0	-24.8	3.30 H	192	52.5	-3.3
4	20085.00	38.2 AV	54.0	-15.8	3.30 H	192	41.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.4 PK	74.0	-27.6	2.61 V	194	33.2	13.2
2	13390.00	36.2 AV	54.0	-17.8	2.61 V	194	23.0	13.2
3	20085.00	52.5 PK	74.0	-21.5	1.11 V	162	55.8	-3.3
4	20085.00	41.7 AV	54.0	-12.3	1.11 V	162	45.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.6 PK	88.2	-43.6	2.37 H	174	30.5	14.1
2	#13710.00	35.0 AV	68.2	-33.2	2.37 H	174	20.9	14.1
3	20565.00	49.4 PK	74.0	-24.6	3.34 H	196	52.3	-2.9
4	20565.00	38.6 AV	54.0	-15.4	3.34 H	196	41.5	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.3 PK	88.2	-41.9	2.50 V	203	32.2	14.1
2	#13710.00	36.1 AV	68.2	-32.1	2.50 V	203	22.0	14.1
3	20565.00	52.2 PK	74.0	-21.8	1.15 V	146	55.1	-2.9
4	20565.00	41.6 AV	54.0	-12.4	1.15 V	146	44.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	45.2 PK	74.0	-28.8	2.31 H	168	33.7	11.5
2	11930.00	35.1 AV	54.0	-18.9	2.31 H	168	23.6	11.5
3	17895.00	49.3 PK	74.0	-24.7	3.35 H	198	25.4	23.9
4	17895.00	38.5 AV	54.0	-15.5	3.35 H	198	14.6	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	46.3 PK	74.0	-27.7	2.50 V	214	34.8	11.5
2	11930.00	36.2 AV	54.0	-17.8	2.50 V	214	24.7	11.5
3	17895.00	52.7 PK	74.0	-21.3	1.12 V	157	28.8	23.9
4	17895.00	41.6 AV	54.0	-12.4	1.12 V	157	17.7	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	44.3 PK	74.0	-29.7	2.31 H	157	32.0	12.3
2	12330.00	34.8 AV	54.0	-19.2	2.31 H	157	22.5	12.3
3	18495.00	49.2 PK	74.0	-24.8	3.29 H	222	53.1	-3.9
4	18495.00	38.7 AV	54.0	-15.3	3.29 H	222	42.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	45.6 PK	74.0	-28.4	2.57 V	222	33.3	12.3
2	12330.00	35.5 AV	54.0	-18.5	2.57 V	222	23.2	12.3
3	18495.00	52.5 PK	74.0	-21.5	1.20 V	144	56.4	-3.9
4	18495.00	41.7 AV	54.0	-12.3	1.20 V	144	45.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	44.9 PK	88.2	-43.3	2.40 H	170	33.2	11.7
2	#12810.00	35.1 AV	68.2	-33.1	2.40 H	170	23.4	11.7
3	19215.00	49.4 PK	74.0	-24.6	3.34 H	209	53.3	-3.9
4	19215.00	38.7 AV	54.0	-15.3	3.34 H	209	42.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	45.8 PK	88.2	-42.4	2.60 V	197	34.1	11.7
2	#12810.00	35.7 AV	68.2	-32.5	2.60 V	197	24.0	11.7
3	19215.00	52.5 PK	74.0	-21.5	1.20 V	141	56.4	-3.9
4	19215.00	41.4 AV	54.0	-12.6	1.20 V	141	45.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	44.5 PK	88.2	-43.7	2.31 H	172	31.9	12.6
2	#13130.00	34.0 AV	68.2	-34.2	2.31 H	172	21.4	12.6
3	19695.00	49.5 PK	74.0	-24.5	3.26 H	221	53.0	-3.5
4	19695.00	38.8 AV	54.0	-15.2	3.26 H	221	42.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	45.0 PK	88.2	-43.2	2.54 V	110	32.4	12.6
2	#13130.00	34.9 AV	68.2	-33.3	2.54 V	110	22.3	12.6
3	19695.00	52.0 PK	74.0	-22.0	3.10 V	298	55.5	-3.5
4	19695.00	41.0 AV	54.0	-13.0	3.10 V	298	44.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	43.8 PK	88.2	-44.4	2.27 H	181	30.4	13.4
2	#13450.00	33.9 AV	68.2	-34.3	2.27 H	181	20.5	13.4
3	20175.00	49.3 PK	74.0	-24.7	3.29 H	225	52.5	-3.2
4	20175.00	38.7 AV	54.0	-15.3	3.29 H	225	41.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	44.8 PK	88.2	-43.4	2.60 V	120	31.4	13.4
2	#13450.00	34.8 AV	68.2	-33.4	2.60 V	120	21.4	13.4
3	20175.00	52.1 PK	74.0	-21.9	3.09 V	291	55.3	-3.2
4	20175.00	40.9 AV	54.0	-13.1	3.09 V	291	44.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	43.7 PK	88.2	-44.5	2.26 H	193	29.5	14.2
2	#13690.00	33.1 AV	68.2	-35.1	2.26 H	193	18.9	14.2
3	20535.00	48.8 PK	74.0	-25.2	3.31 H	222	51.7	-2.9
4	20535.00	38.3 AV	54.0	-15.7	3.31 H	222	41.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	44.6 PK	88.2	-43.6	2.53 V	97	30.4	14.2
2	#13690.00	34.6 AV	68.2	-33.6	2.53 V	97	20.4	14.2
3	20535.00	52.1 PK	74.0	-21.9	3.05 V	303	55.0	-2.9
4	20535.00	41.3 AV	54.0	-12.7	3.05 V	303	44.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	43.1 PK	74.0	-30.9	2.15 H	330	31.6	11.5
2	11970.00	33.2 AV	54.0	-20.8	2.15 H	330	21.7	11.5
3	17955.00	48.0 PK	74.0	-26.0	1.24 H	159	22.3	25.7
4	17955.00	37.6 AV	54.0	-16.4	1.24 H	159	11.9	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.3 PK	74.0	-28.7	2.55 V	104	33.8	11.5
2	11970.00	35.1 AV	54.0	-18.9	2.55 V	104	23.6	11.5
3	17955.00	51.8 PK	74.0	-22.2	3.10 V	297	26.1	25.7
4	17955.00	40.9 AV	54.0	-13.1	3.10 V	297	15.2	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	42.8 PK	74.0	-31.2	2.10 H	341	30.4	12.4
2	12290.00	32.7 AV	54.0	-21.3	2.10 H	341	20.3	12.4
3	18435.00	48.5 PK	74.0	-25.5	1.25 H	150	52.6	-4.1
4	18435.00	37.8 AV	54.0	-16.2	1.25 H	150	41.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	44.9 PK	74.0	-29.1	2.51 V	125	32.5	12.4
2	12290.00	34.5 AV	54.0	-19.5	2.51 V	125	22.1	12.4
3	18435.00	52.4 PK	74.0	-21.6	3.12 V	292	56.5	-4.1
4	18435.00	41.2 AV	54.0	-12.8	3.12 V	292	45.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	43.5 PK	88.2	-44.7	2.11 H	344	31.9	11.6
2	#12770.00	33.6 AV	68.2	-34.6	2.11 H	344	22.0	11.6
3	19155.00	48.0 PK	74.0	-26.0	1.26 H	161	51.9	-3.9
4	19155.00	37.3 AV	54.0	-16.7	1.26 H	161	41.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	44.4 PK	88.2	-43.8	2.53 V	118	32.8	11.6
2	#12770.00	34.6 AV	68.2	-33.6	2.53 V	118	23.0	11.6
3	19155.00	52.2 PK	74.0	-21.8	3.07 V	295	56.1	-3.9
4	19155.00	41.4 AV	54.0	-12.6	3.07 V	295	45.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	42.7 PK	74.0	-31.3	2.09 H	337	29.7	13.0
2	13250.00	33.0 AV	54.0	-21.0	2.09 H	337	20.0	13.0
3	19875.00	47.5 PK	74.0	-26.5	1.29 H	167	50.6	-3.1
4	19875.00	37.2 AV	54.0	-16.8	1.29 H	167	40.3	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	45.1 PK	74.0	-28.9	2.53 V	117	32.1	13.0
2	13250.00	34.7 AV	54.0	-19.3	2.53 V	117	21.7	13.0
3	19875.00	52.4 PK	74.0	-21.6	3.16 V	310	55.5	-3.1
4	19875.00	41.4 AV	54.0	-12.6	3.16 V	310	44.5	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	43.4 PK	88.2	-44.8	2.11 H	333	30.1	13.3
2	#13410.00	33.5 AV	68.2	-34.7	2.11 H	333	20.2	13.3
3	20115.00	48.1 PK	74.0	-25.9	1.27 H	156	51.4	-3.3
4	20115.00	37.8 AV	54.0	-16.2	1.27 H	156	41.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	44.3 PK	88.2	-43.9	2.58 V	96	31.0	13.3
2	#13410.00	34.5 AV	68.2	-33.7	2.58 V	96	21.2	13.3
3	20115.00	51.8 PK	74.0	-22.2	3.12 V	313	55.1	-3.3
4	20115.00	41.0 AV	54.0	-13.0	3.12 V	313	44.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	42.9 PK	88.2	-45.3	2.15 H	331	29.0	13.9
2	#13570.00	32.9 AV	68.2	-35.3	2.15 H	331	19.0	13.9
3	20355.00	47.2 PK	74.0	-26.8	1.20 H	156	50.1	-2.9
4	20355.00	37.1 AV	54.0	-16.9	1.20 H	156	40.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	45.5 PK	88.2	-42.7	2.56 V	108	31.6	13.9
2	#13570.00	35.4 AV	68.2	-32.8	2.56 V	108	21.5	13.9
3	20355.00	51.7 PK	74.0	-22.3	3.07 V	301	54.6	-2.9
4	20355.00	40.7 AV	54.0	-13.3	3.07 V	301	43.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.9 PK	74.0	-30.1	2.12 H	327	32.0	11.9
2	12050.00	33.7 AV	54.0	-20.3	2.12 H	327	21.8	11.9
3	18075.00	48.0 PK	74.0	-26.0	1.27 H	162	52.7	-4.7
4	18075.00	37.5 AV	54.0	-16.5	1.27 H	162	42.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.8 PK	74.0	-29.2	2.56 V	97	32.9	11.9
2	12050.00	34.8 AV	54.0	-19.2	2.56 V	97	22.9	11.9
3	18075.00	52.0 PK	74.0	-22.0	3.12 V	299	56.7	-4.7
4	18075.00	41.2 AV	54.0	-12.8	3.12 V	299	45.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	42.9 PK	74.0	-31.1	2.20 H	337	31.1	11.8
2	12370.00	32.9 AV	54.0	-21.1	2.20 H	337	21.1	11.8
3	18555.00	48.4 PK	74.0	-25.6	1.28 H	148	52.3	-3.9
4	18555.00	38.0 AV	54.0	-16.0	1.28 H	148	41.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	44.6 PK	74.0	-29.4	2.58 V	118	32.8	11.8
2	12370.00	34.6 AV	54.0	-19.4	2.58 V	118	22.8	11.8
3	18555.00	51.4 PK	74.0	-22.6	3.09 V	299	55.3	-3.9
4	18555.00	40.6 AV	54.0	-13.4	3.09 V	299	44.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	43.1 PK	74.0	-30.9	2.09 H	319	31.6	11.5
2	12690.00	33.2 AV	54.0	-20.8	2.09 H	319	21.7	11.5
3	19035.00	48.1 PK	74.0	-25.9	1.28 H	155	51.8	-3.7
4	19035.00	37.5 AV	54.0	-16.5	1.28 H	155	41.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.0 PK	74.0	-29.0	2.53 V	102	33.5	11.5
2	12690.00	34.7 AV	54.0	-19.3	2.53 V	102	23.2	11.5
3	19035.00	51.8 PK	74.0	-22.2	3.06 V	307	55.5	-3.7
4	19035.00	40.8 AV	54.0	-13.2	3.06 V	307	44.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	43.3 PK	74.0	-30.7	2.11 H	339	30.2	13.1
2	13330.00	33.5 AV	54.0	-20.5	2.11 H	339	20.4	13.1
3	19995.00	48.3 PK	74.0	-25.7	1.23 H	148	51.5	-3.2
4	19995.00	37.8 AV	54.0	-16.2	1.23 H	148	41.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.2 PK	74.0	-28.8	2.55 V	125	32.1	13.1
2	13330.00	35.0 AV	54.0	-19.0	2.55 V	125	21.9	13.1
3	19995.00	51.8 PK	74.0	-22.2	3.07 V	307	55.0	-3.2
4	19995.00	40.6 AV	54.0	-13.4	3.07 V	307	43.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.6 PK	74.0	-28.4	2.33 H	164	34.0	11.6
2	11870.00	35.6 AV	54.0	-18.4	2.33 H	164	24.0	11.6
3	17805.00	50.7 PK	74.0	-23.3	3.27 H	203	28.9	21.8
4	17805.00	39.8 AV	54.0	-14.2	3.27 H	203	18.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.2 PK	74.0	-26.8	2.27 V	197	35.6	11.6
2	11870.00	36.7 AV	54.0	-17.3	2.27 V	197	25.1	11.6
3	17805.00	52.7 PK	74.0	-21.3	1.12 V	287	30.9	21.8
4	17805.00	42.1 AV	54.0	-11.9	1.12 V	287	20.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.0 PK	74.0	-28.0	2.35 H	159	34.5	11.5
2	11910.00	36.0 AV	54.0	-18.0	2.35 H	159	24.5	11.5
3	17865.00	50.6 PK	74.0	-23.4	3.30 H	206	27.4	23.2
4	17865.00	39.5 AV	54.0	-14.5	3.30 H	206	16.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.8 PK	74.0	-26.2	2.26 V	189	36.3	11.5
2	11910.00	37.1 AV	54.0	-16.9	2.26 V	189	25.6	11.5
3	17865.00	53.2 PK	74.0	-20.8	1.16 V	300	30.0	23.2
4	17865.00	42.4 AV	54.0	-11.6	1.16 V	300	19.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.3 PK	88.2	-41.9	2.35 H	155	34.4	11.9
2	#12830.00	36.3 AV	68.2	-31.9	2.35 H	155	24.4	11.9
3	19245.00	50.4 PK	74.0	-23.6	3.30 H	213	54.3	-3.9
4	19245.00	39.2 AV	54.0	-14.8	3.30 H	213	43.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.4 PK	88.2	-39.8	2.24 V	203	36.5	11.9
2	#12830.00	37.5 AV	68.2	-30.7	2.24 V	203	25.6	11.9
3	19245.00	53.1 PK	74.0	-20.9	1.16 V	308	57.0	-3.9
4	19245.00	42.0 AV	54.0	-12.0	1.16 V	308	45.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.8 PK	88.2	-42.4	2.39 H	153	33.4	12.4
2	#13070.00	35.8 AV	68.2	-32.4	2.39 H	153	23.4	12.4
3	19605.00	50.7 PK	74.0	-23.3	3.32 H	216	54.3	-3.6
4	19605.00	39.8 AV	54.0	-14.2	3.32 H	216	43.4	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.2 PK	88.2	-41.0	2.28 V	197	34.8	12.4
2	#13070.00	36.8 AV	68.2	-31.4	2.28 V	197	24.4	12.4
3	19605.00	53.7 PK	74.0	-20.3	1.14 V	296	57.3	-3.6
4	19605.00	42.6 AV	54.0	-11.4	1.14 V	296	46.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.5 PK	88.2	-41.7	2.30 H	173	32.4	14.1
2	#13710.00	36.4 AV	68.2	-31.8	2.30 H	173	22.3	14.1
3	20565.00	50.8 PK	74.0	-23.2	3.25 H	205	53.7	-2.9
4	20565.00	39.9 AV	54.0	-14.1	3.25 H	205	42.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.9 PK	88.2	-40.3	2.23 V	192	33.8	14.1
2	#13710.00	37.2 AV	68.2	-31.0	2.23 V	192	23.1	14.1
3	20565.00	53.3 PK	74.0	-20.7	1.21 V	286	56.2	-2.9
4	20565.00	42.3 AV	54.0	-11.7	1.21 V	286	45.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.9 PK	74.0	-28.1	2.34 H	148	34.3	11.6
2	11870.00	35.8 AV	54.0	-18.2	2.34 H	148	24.2	11.6
3	17805.00	51.0 PK	74.0	-23.0	3.32 H	206	29.2	21.8
4	17805.00	40.0 AV	54.0	-14.0	3.32 H	206	18.2	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.8 PK	74.0	-25.2	2.32 V	170	37.2	11.6
2	11870.00	37.6 AV	54.0	-16.4	2.32 V	170	26.0	11.6
3	17805.00	53.7 PK	74.0	-20.3	1.19 V	292	31.9	21.8
4	17805.00	42.5 AV	54.0	-11.5	1.19 V	292	20.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.7 PK	74.0	-28.3	2.35 H	157	34.2	11.5
2	11910.00	35.7 AV	54.0	-18.3	2.35 H	157	24.2	11.5
3	17865.00	50.4 PK	74.0	-23.6	3.35 H	204	27.2	23.2
4	17865.00	39.5 AV	54.0	-14.5	3.35 H	204	16.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.3 PK	74.0	-25.7	2.30 V	183	36.8	11.5
2	11910.00	37.4 AV	54.0	-16.6	2.30 V	183	25.9	11.5
3	17865.00	53.4 PK	74.0	-20.6	1.15 V	296	30.2	23.2
4	17865.00	42.5 AV	54.0	-11.5	1.15 V	296	19.3	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.3 PK	88.2	-41.9	2.40 H	154	34.4	11.9
2	#12830.00	36.3 AV	68.2	-31.9	2.40 H	154	24.4	11.9
3	19245.00	50.5 PK	74.0	-23.5	3.33 H	218	54.4	-3.9
4	19245.00	39.2 AV	54.0	-14.8	3.33 H	218	43.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.5 PK	88.2	-40.7	2.28 V	184	35.6	11.9
2	#12830.00	36.9 AV	68.2	-31.3	2.28 V	184	25.0	11.9
3	19245.00	53.3 PK	74.0	-20.7	1.15 V	301	57.2	-3.9
4	19245.00	42.5 AV	54.0	-11.5	1.15 V	301	46.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.7 PK	88.2	-42.5	2.41 H	154	33.3	12.4
2	#13070.00	35.6 AV	68.2	-32.6	2.41 H	154	23.2	12.4
3	19605.00	50.8 PK	74.0	-23.2	3.33 H	212	54.4	-3.6
4	19605.00	39.4 AV	54.0	-14.6	3.33 H	212	43.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	2.21 V	204	35.9	12.4
2	#13070.00	37.4 AV	68.2	-30.8	2.21 V	204	25.0	12.4
3	19605.00	52.7 PK	74.0	-21.3	1.22 V	314	56.3	-3.6
4	19605.00	42.2 AV	54.0	-11.8	1.22 V	314	45.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.8 PK	88.2	-41.4	2.32 H	164	32.7	14.1
2	#13710.00	36.5 AV	68.2	-31.7	2.32 H	164	22.4	14.1
3	20565.00	50.8 PK	74.0	-23.2	3.24 H	206	53.7	-2.9
4	20565.00	39.7 AV	54.0	-14.3	3.24 H	206	42.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.4 PK	88.2	-39.8	2.22 V	199	34.3	14.1
2	#13710.00	37.6 AV	68.2	-30.6	2.22 V	199	23.5	14.1
3	20565.00	53.2 PK	74.0	-20.8	1.12 V	286	56.1	-2.9
4	20565.00	42.4 AV	54.0	-11.6	1.12 V	286	45.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.3 PK	74.0	-28.7	2.29 H	172	33.7	11.6
2	11870.00	35.9 AV	54.0	-18.1	2.29 H	172	24.3	11.6
3	17805.00	50.1 PK	74.0	-23.9	3.22 H	189	28.3	21.8
4	17805.00	38.7 AV	54.0	-15.3	3.22 H	189	16.9	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.0 PK	74.0	-26.0	2.24 V	182	36.4	11.6
2	11870.00	37.5 AV	54.0	-16.5	2.24 V	182	25.9	11.6
3	17805.00	53.6 PK	74.0	-20.4	1.14 V	290	31.8	21.8
4	17805.00	42.6 AV	54.0	-11.4	1.14 V	290	20.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.7 PK	74.0	-28.3	2.31 H	167	34.2	11.5
2	11910.00	36.0 AV	54.0	-18.0	2.31 H	167	24.5	11.5
3	17865.00	50.4 PK	74.0	-23.6	3.24 H	193	27.2	23.2
4	17865.00	39.0 AV	54.0	-15.0	3.24 H	193	15.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.5 PK	74.0	-26.5	2.22 V	187	36.0	11.5
2	11910.00	37.0 AV	54.0	-17.0	2.22 V	187	25.5	11.5
3	17865.00	53.1 PK	74.0	-20.9	1.11 V	302	29.9	23.2
4	17865.00	42.4 AV	54.0	-11.6	1.11 V	302	19.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.4 PK	88.2	-41.8	2.30 H	153	34.5	11.9
2	#12830.00	36.1 AV	68.2	-32.1	2.30 H	153	24.2	11.9
3	19245.00	50.6 PK	74.0	-23.4	3.35 H	209	54.5	-3.9
4	19245.00	39.5 AV	54.0	-14.5	3.35 H	209	43.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.9 PK	88.2	-40.3	2.28 V	186	36.0	11.9
2	#12830.00	37.2 AV	68.2	-31.0	2.28 V	186	25.3	11.9
3	19245.00	53.6 PK	74.0	-20.4	1.20 V	311	57.5	-3.9
4	19245.00	42.8 AV	54.0	-11.2	1.20 V	311	46.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.0 PK	88.2	-42.2	2.30 H	171	33.6	12.4
2	#13070.00	35.9 AV	68.2	-32.3	2.30 H	171	23.5	12.4
3	19605.00	51.1 PK	74.0	-22.9	3.35 H	218	54.7	-3.6
4	19605.00	39.9 AV	54.0	-14.1	3.35 H	218	43.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.2 PK	88.2	-41.0	2.23 V	187	34.8	12.4
2	#13070.00	36.8 AV	68.2	-31.4	2.23 V	187	24.4	12.4
3	19605.00	53.3 PK	74.0	-20.7	1.11 V	292	56.9	-3.6
4	19605.00	42.5 AV	54.0	-11.5	1.11 V	292	46.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.5 PK	88.2	-41.7	2.39 H	160	32.4	14.1
2	#13710.00	36.4 AV	68.2	-31.8	2.39 H	160	22.3	14.1
3	20565.00	50.4 PK	74.0	-23.6	3.35 H	190	53.3	-2.9
4	20565.00	39.2 AV	54.0	-14.8	3.35 H	190	42.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	2.30 V	182	34.5	14.1
2	#13710.00	37.6 AV	68.2	-30.6	2.30 V	182	23.5	14.1
3	20565.00	53.5 PK	74.0	-20.5	1.19 V	302	56.4	-2.9
4	20565.00	42.6 AV	54.0	-11.4	1.19 V	302	45.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.9 PK	74.0	-28.1	2.34 H	133	34.3	11.6
2	11870.00	36.5 AV	54.0	-17.5	2.34 H	133	24.9	11.6
3	17805.00	50.1 PK	74.0	-23.9	3.28 H	211	28.3	21.8
4	17805.00	39.4 AV	54.0	-14.6	3.28 H	211	17.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.7 PK	74.0	-27.3	2.32 V	176	35.1	11.6
2	11870.00	36.3 AV	54.0	-17.7	2.32 V	176	24.7	11.6
3	17805.00	53.5 PK	74.0	-20.5	1.19 V	279	31.7	21.8
4	17805.00	42.6 AV	54.0	-11.4	1.19 V	279	20.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.1 PK	74.0	-27.9	2.33 H	146	34.6	11.5
2	11910.00	36.4 AV	54.0	-17.6	2.33 H	146	24.9	11.5
3	17865.00	50.7 PK	74.0	-23.3	3.34 H	211	27.5	23.2
4	17865.00	39.8 AV	54.0	-14.2	3.34 H	211	16.6	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.1 PK	74.0	-26.9	2.28 V	190	35.6	11.5
2	11910.00	36.6 AV	54.0	-17.4	2.28 V	190	25.1	11.5
3	17865.00	53.6 PK	74.0	-20.4	1.15 V	294	30.4	23.2
4	17865.00	42.9 AV	54.0	-11.1	1.15 V	294	19.7	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.6 PK	88.2	-42.6	2.33 H	155	33.7	11.9
2	#12830.00	35.5 AV	68.2	-32.7	2.33 H	155	23.6	11.9
3	19245.00	50.2 PK	74.0	-23.8	3.33 H	219	54.1	-3.9
4	19245.00	39.2 AV	54.0	-14.8	3.33 H	219	43.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.0 PK	88.2	-40.2	2.21 V	184	36.1	11.9
2	#12830.00	37.5 AV	68.2	-30.7	2.21 V	184	25.6	11.9
3	19245.00	53.1 PK	74.0	-20.9	1.11 V	304	57.0	-3.9
4	19245.00	42.2 AV	54.0	-11.8	1.11 V	304	46.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.1 PK	88.2	-42.1	2.34 H	172	33.7	12.4
2	#13070.00	36.2 AV	68.2	-32.0	2.34 H	172	23.8	12.4
3	19605.00	50.6 PK	74.0	-23.4	3.30 H	212	54.2	-3.6
4	19605.00	39.4 AV	54.0	-14.6	3.30 H	212	43.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.5 PK	88.2	-40.7	2.30 V	190	35.1	12.4
2	#13070.00	37.1 AV	68.2	-31.1	2.30 V	190	24.7	12.4
3	19605.00	53.1 PK	74.0	-20.9	1.11 V	312	56.7	-3.6
4	19605.00	42.6 AV	54.0	-11.4	1.11 V	312	46.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.7 PK	88.2	-41.5	2.34 H	173	32.6	14.1
2	#13710.00	36.4 AV	68.2	-31.8	2.34 H	173	22.3	14.1
3	20565.00	50.5 PK	74.0	-23.5	3.31 H	201	53.4	-2.9
4	20565.00	39.5 AV	54.0	-14.5	3.31 H	201	42.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.0 PK	88.2	-40.2	2.25 V	179	33.9	14.1
2	#13710.00	37.1 AV	68.2	-31.1	2.25 V	179	23.0	14.1
3	20565.00	53.3 PK	74.0	-20.7	1.17 V	313	56.2	-2.9
4	20565.00	42.3 AV	54.0	-11.7	1.17 V	313	45.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.7 PK	74.0	-28.3	2.42 H	165	34.1	11.6
2	11870.00	35.6 AV	54.0	-18.4	2.42 H	165	24.0	11.6
3	17805.00	50.4 PK	74.0	-23.6	3.31 H	186	28.6	21.8
4	17805.00	39.7 AV	54.0	-14.3	3.31 H	186	17.9	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.9 PK	74.0	-26.1	2.18 V	207	36.3	11.6
2	11870.00	37.2 AV	54.0	-16.8	2.18 V	207	25.6	11.6
3	17805.00	53.5 PK	74.0	-20.5	1.13 V	315	31.7	21.8
4	17805.00	42.9 AV	54.0	-11.1	1.13 V	315	21.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.5 PK	74.0	-28.5	2.38 H	150	34.0	11.5
2	11910.00	35.5 AV	54.0	-18.5	2.38 H	150	24.0	11.5
3	17865.00	50.4 PK	74.0	-23.6	3.30 H	196	27.2	23.2
4	17865.00	39.5 AV	54.0	-14.5	3.30 H	196	16.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.5 PK	74.0	-26.5	2.23 V	195	36.0	11.5
2	11910.00	36.9 AV	54.0	-17.1	2.23 V	195	25.4	11.5
3	17865.00	53.6 PK	74.0	-20.4	1.11 V	301	30.4	23.2
4	17865.00	42.9 AV	54.0	-11.1	1.11 V	301	19.7	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.4 PK	88.2	-41.8	2.40 H	174	34.5	11.9
2	#12830.00	36.4 AV	68.2	-31.8	2.40 H	174	24.5	11.9
3	19245.00	50.2 PK	74.0	-23.8	3.29 H	210	54.1	-3.9
4	19245.00	39.0 AV	54.0	-15.0	3.29 H	210	42.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.1 PK	88.2	-40.1	2.31 V	199	36.2	11.9
2	#12830.00	37.1 AV	68.2	-31.1	2.31 V	199	25.2	11.9
3	19245.00	53.0 PK	74.0	-21.0	1.14 V	287	56.9	-3.9
4	19245.00	42.0 AV	54.0	-12.0	1.14 V	287	45.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.3 PK	88.2	-41.9	2.40 H	149	33.9	12.4
2	#13070.00	36.2 AV	68.2	-32.0	2.40 H	149	23.8	12.4
3	19605.00	50.2 PK	74.0	-23.8	3.29 H	200	53.8	-3.6
4	19605.00	39.0 AV	54.0	-15.0	3.29 H	200	42.6	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.6 PK	88.2	-40.6	2.23 V	200	35.2	12.4
2	#13070.00	37.0 AV	68.2	-31.2	2.23 V	200	24.6	12.4
3	19605.00	52.6 PK	74.0	-21.4	1.15 V	313	56.2	-3.6
4	19605.00	41.9 AV	54.0	-12.1	1.15 V	313	45.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.6 PK	88.2	-42.6	2.36 H	158	31.5	14.1
2	#13710.00	35.6 AV	68.2	-32.6	2.36 H	158	21.5	14.1
3	20565.00	50.3 PK	74.0	-23.7	3.30 H	210	53.2	-2.9
4	20565.00	39.5 AV	54.0	-14.5	3.30 H	210	42.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.9 PK	88.2	-40.3	2.23 V	201	33.8	14.1
2	#13710.00	37.1 AV	68.2	-31.1	2.23 V	201	23.0	14.1
3	20565.00	53.3 PK	74.0	-20.7	1.22 V	312	56.2	-2.9
4	20565.00	42.8 AV	54.0	-11.2	1.22 V	312	45.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.8 PK	74.0	-28.2	2.38 H	171	34.3	11.5
2	11970.00	35.9 AV	54.0	-18.1	2.38 H	171	24.4	11.5
3	17955.00	50.2 PK	74.0	-23.8	3.29 H	209	24.5	25.7
4	17955.00	39.2 AV	54.0	-14.8	3.29 H	209	13.5	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.6 PK	74.0	-26.4	2.21 V	178	36.1	11.5
2	11970.00	37.0 AV	54.0	-17.0	2.21 V	178	25.5	11.5
3	17955.00	53.6 PK	74.0	-20.4	1.11 V	293	27.9	25.7
4	17955.00	42.8 AV	54.0	-11.2	1.11 V	293	17.1	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.5 PK	88.2	-41.7	2.36 H	152	34.9	11.6
2	#12770.00	36.2 AV	68.2	-32.0	2.36 H	152	24.6	11.6
3	19155.00	50.8 PK	74.0	-23.2	3.30 H	205	54.7	-3.9
4	19155.00	39.8 AV	54.0	-14.2	3.30 H	205	43.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.8 PK	88.2	-40.4	2.24 V	194	36.2	11.6
2	#12770.00	37.1 AV	68.2	-31.1	2.24 V	194	25.5	11.6
3	19155.00	53.7 PK	74.0	-20.3	1.12 V	291	57.6	-3.9
4	19155.00	42.7 AV	54.0	-11.3	1.12 V	291	46.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	45.9 PK	74.0	-28.1	2.33 H	161	32.9	13.0
2	13250.00	36.0 AV	54.0	-18.0	2.33 H	161	23.0	13.0
3	19875.00	50.4 PK	74.0	-23.6	3.25 H	209	53.5	-3.1
4	19875.00	39.1 AV	54.0	-14.9	3.25 H	209	42.2	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	48.3 PK	74.0	-25.7	2.24 V	191	35.3	13.0
2	13250.00	37.6 AV	54.0	-16.4	2.24 V	191	24.6	13.0
3	19875.00	53.3 PK	74.0	-20.7	1.21 V	293	56.4	-3.1
4	19875.00	42.4 AV	54.0	-11.6	1.21 V	293	45.5	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	46.3 PK	88.2	-41.9	2.35 H	147	32.4	13.9
2	#13570.00	36.0 AV	68.2	-32.2	2.35 H	147	22.1	13.9
3	20355.00	50.6 PK	74.0	-23.4	3.35 H	210	53.5	-2.9
4	20355.00	39.6 AV	54.0	-14.4	3.35 H	210	42.5	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	47.3 PK	88.2	-40.9	2.26 V	190	33.4	13.9
2	#13570.00	36.6 AV	68.2	-31.6	2.26 V	190	22.7	13.9
3	20355.00	53.5 PK	74.0	-20.5	1.20 V	304	56.4	-2.9
4	20355.00	42.8 AV	54.0	-11.2	1.20 V	304	45.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	45.4 PK	74.0	-28.6	2.40 H	157	33.5	11.9
2	12050.00	35.6 AV	54.0	-18.4	2.40 H	157	23.7	11.9
3	18075.00	50.1 PK	74.0	-23.9	3.33 H	206	54.8	-4.7
4	18075.00	39.2 AV	54.0	-14.8	3.33 H	206	43.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.1 PK	74.0	-25.9	2.29 V	192	36.2	11.9
2	12050.00	37.2 AV	54.0	-16.8	2.29 V	192	25.3	11.9
3	18075.00	53.7 PK	74.0	-20.3	1.22 V	312	58.4	-4.7
4	18075.00	42.8 AV	54.0	-11.2	1.22 V	312	47.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	46.1 PK	74.0	-27.9	2.39 H	168	34.6	11.5
2	12690.00	36.1 AV	54.0	-17.9	2.39 H	168	24.6	11.5
3	19035.00	51.0 PK	74.0	-23.0	3.31 H	202	54.7	-3.7
4	19035.00	39.7 AV	54.0	-14.3	3.31 H	202	43.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.7 PK	74.0	-26.3	2.25 V	203	36.2	11.5
2	12690.00	37.1 AV	54.0	-16.9	2.25 V	203	25.6	11.5
3	19035.00	52.8 PK	74.0	-21.2	1.15 V	310	56.5	-3.7
4	19035.00	42.2 AV	54.0	-11.8	1.15 V	310	45.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.9 PK	74.0	-28.1	2.29 H	156	32.8	13.1
2	13330.00	35.9 AV	54.0	-18.1	2.29 H	156	22.8	13.1
3	19995.00	50.6 PK	74.0	-23.4	3.36 H	195	53.8	-3.2
4	19995.00	39.4 AV	54.0	-14.6	3.36 H	195	42.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.1 PK	74.0	-26.9	2.27 V	180	34.0	13.1
2	13330.00	36.7 AV	54.0	-17.3	2.27 V	180	23.6	13.1
3	19995.00	52.4 PK	74.0	-21.6	1.12 V	292	55.6	-3.2
4	19995.00	41.9 AV	54.0	-12.1	1.12 V	292	45.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.3 PK	74.0	-27.7	2.40 H	154	34.4	11.9
2	12050.00	36.3 AV	54.0	-17.7	2.40 H	154	24.4	11.9
3	18075.00	50.4 PK	74.0	-23.6	3.27 H	219	55.1	-4.7
4	18075.00	39.4 AV	54.0	-14.6	3.27 H	219	44.1	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.5 PK	74.0	-26.5	2.32 V	186	35.6	11.9
2	12050.00	36.7 AV	54.0	-17.3	2.32 V	186	24.8	11.9
3	18075.00	52.8 PK	74.0	-21.2	1.12 V	290	57.5	-4.7
4	18075.00	42.3 AV	54.0	-11.7	1.12 V	290	47.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.8 PK	74.0	-28.2	2.33 H	170	34.3	11.5
2	12690.00	35.9 AV	54.0	-18.1	2.33 H	170	24.4	11.5
3	19035.00	50.4 PK	74.0	-23.6	3.30 H	208	54.1	-3.7
4	19035.00	39.0 AV	54.0	-15.0	3.30 H	208	42.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.6 PK	74.0	-25.4	2.20 V	180	37.1	11.5
2	12690.00	37.6 AV	54.0	-16.4	2.20 V	180	26.1	11.5
3	19035.00	53.1 PK	74.0	-20.9	1.21 V	314	56.8	-3.7
4	19035.00	42.5 AV	54.0	-11.5	1.21 V	314	46.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.5 PK	74.0	-28.5	2.36 H	144	32.4	13.1
2	13330.00	35.5 AV	54.0	-18.5	2.36 H	144	22.4	13.1
3	19995.00	51.0 PK	74.0	-23.0	3.27 H	192	54.2	-3.2
4	19995.00	40.0 AV	54.0	-14.0	3.27 H	192	43.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.4 PK	74.0	-26.6	2.23 V	183	34.3	13.1
2	13330.00	36.9 AV	54.0	-17.1	2.23 V	183	23.8	13.1
3	19995.00	53.6 PK	74.0	-20.4	1.20 V	288	56.8	-3.2
4	19995.00	42.7 AV	54.0	-11.3	1.20 V	288	45.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

(under control of a Standard Power AP)

Mode B

2TX

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.3 PK	74.0	-29.7	2.16 H	215	32.7	11.6
2	11870.00	33.6 AV	54.0	-20.4	2.16 H	215	22.0	11.6
3	17805.00	47.9 PK	74.0	-26.1	2.12 H	152	26.1	21.8
4	17805.00	37.3 AV	54.0	-16.7	2.12 H	152	15.5	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.4 PK	74.0	-28.6	2.55 V	203	33.8	11.6
2	11870.00	35.3 AV	54.0	-18.7	2.55 V	203	23.7	11.6
3	17805.00	51.8 PK	74.0	-22.2	2.46 V	167	30.0	21.8
4	17805.00	40.5 AV	54.0	-13.5	2.46 V	167	18.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.8 PK	74.0	-30.2	2.16 H	220	32.3	11.5
2	11910.00	33.1 AV	54.0	-20.9	2.16 H	220	21.6	11.5
3	17865.00	48.6 PK	74.0	-25.4	2.16 H	142	25.4	23.2
4	17865.00	37.7 AV	54.0	-16.3	2.16 H	142	14.5	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.0 PK	74.0	-29.0	2.55 V	210	33.5	11.5
2	11910.00	34.9 AV	54.0	-19.1	2.55 V	210	23.4	11.5
3	17865.00	51.6 PK	74.0	-22.4	2.46 V	159	28.4	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.46 V	159	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	43.9 PK	74.0	-30.1	2.12 H	223	31.8	12.1
2	12350.00	33.3 AV	54.0	-20.7	2.12 H	223	21.2	12.1
3	18525.00	48.5 PK	74.0	-25.5	2.15 H	157	52.4	-3.9
4	18525.00	37.6 AV	54.0	-16.4	2.15 H	157	41.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	45.1 PK	74.0	-28.9	2.58 V	225	33.0	12.1
2	12350.00	35.0 AV	54.0	-19.0	2.58 V	225	22.9	12.1
3	18525.00	52.2 PK	74.0	-21.8	2.48 V	166	56.1	-3.9
4	18525.00	40.5 AV	54.0	-13.5	2.48 V	166	44.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.2 PK	88.2	-44.0	2.12 H	204	32.3	11.9
2	#12830.00	33.6 AV	68.2	-34.6	2.12 H	204	21.7	11.9
3	19245.00	48.6 PK	74.0	-25.4	2.15 H	152	52.5	-3.9
4	19245.00	37.5 AV	54.0	-16.5	2.15 H	152	41.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.8 PK	88.2	-43.4	2.54 V	207	32.9	11.9
2	#12830.00	34.6 AV	68.2	-33.6	2.54 V	207	22.7	11.9
3	19245.00	51.6 PK	74.0	-22.4	2.49 V	158	55.5	-3.9
4	19245.00	40.1 AV	54.0	-13.9	2.49 V	158	44.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.4 PK	88.2	-44.8	2.15 H	235	31.0	12.4
2	#13070.00	32.7 AV	68.2	-35.5	2.15 H	235	20.3	12.4
3	19605.00	48.7 PK	74.0	-25.3	2.13 H	135	52.3	-3.6
4	19605.00	37.9 AV	54.0	-16.1	2.13 H	135	41.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.4 PK	88.2	-42.8	2.56 V	196	33.0	12.4
2	#13070.00	35.1 AV	68.2	-33.1	2.56 V	196	22.7	12.4
3	19605.00	51.3 PK	74.0	-22.7	2.46 V	154	54.9	-3.6
4	19605.00	40.2 AV	54.0	-13.8	2.46 V	154	43.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	44.2 PK	74.0	-29.8	2.11 H	213	31.0	13.2
2	13390.00	33.3 AV	54.0	-20.7	2.11 H	213	20.1	13.2
3	20085.00	48.3 PK	74.0	-25.7	2.19 H	147	51.6	-3.3
4	20085.00	37.7 AV	54.0	-16.3	2.19 H	147	41.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	44.9 PK	74.0	-29.1	2.60 V	215	31.7	13.2
2	13390.00	35.0 AV	54.0	-19.0	2.60 V	215	21.8	13.2
3	20085.00	51.3 PK	74.0	-22.7	2.47 V	168	54.6	-3.3
4	20085.00	40.1 AV	54.0	-13.9	2.47 V	168	43.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	43.5 PK	88.2	-44.7	2.22 H	215	29.4	14.1
2	#13710.00	32.7 AV	68.2	-35.5	2.22 H	215	18.6	14.1
3	20565.00	49.1 PK	74.0	-24.9	2.11 H	132	52.0	-2.9
4	20565.00	38.1 AV	54.0	-15.9	2.11 H	132	41.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.6 PK	88.2	-42.6	2.57 V	212	31.5	14.1
2	#13710.00	35.2 AV	68.2	-33.0	2.57 V	212	21.1	14.1
3	20565.00	51.2 PK	74.0	-22.8	2.51 V	162	54.1	-2.9
4	20565.00	39.8 AV	54.0	-14.2	2.51 V	162	42.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	43.8 PK	74.0	-30.2	2.07 H	201	32.2	11.6
2	11870.00	33.3 AV	54.0	-20.7	2.07 H	201	21.7	11.6
3	17805.00	48.4 PK	74.0	-25.6	2.20 H	148	26.6	21.8
4	17805.00	37.4 AV	54.0	-16.6	2.20 H	148	15.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.6 PK	74.0	-29.4	2.57 V	212	33.0	11.6
2	11870.00	34.2 AV	54.0	-19.8	2.57 V	212	22.6	11.6
3	17805.00	51.4 PK	74.0	-22.6	2.45 V	172	29.6	21.8
4	17805.00	39.9 AV	54.0	-14.1	2.45 V	172	18.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.9 PK	74.0	-30.1	2.17 H	215	32.4	11.5
2	11910.00	33.2 AV	54.0	-20.8	2.17 H	215	21.7	11.5
3	17865.00	48.8 PK	74.0	-25.2	2.15 H	149	25.6	23.2
4	17865.00	38.0 AV	54.0	-16.0	2.15 H	149	14.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.8 PK	74.0	-29.2	2.52 V	195	33.3	11.5
2	11910.00	35.0 AV	54.0	-19.0	2.52 V	195	23.5	11.5
3	17865.00	51.1 PK	74.0	-22.9	2.40 V	168	27.9	23.2
4	17865.00	40.0 AV	54.0	-14.0	2.40 V	168	16.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	44.1 PK	74.0	-29.9	2.20 H	221	32.0	12.1
2	12350.00	33.2 AV	54.0	-20.8	2.20 H	221	21.1	12.1
3	18525.00	49.2 PK	74.0	-24.8	2.20 H	150	53.1	-3.9
4	18525.00	38.2 AV	54.0	-15.8	2.20 H	150	42.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	44.3 PK	74.0	-29.7	2.50 V	204	32.2	12.1
2	12350.00	34.4 AV	54.0	-19.6	2.50 V	204	22.3	12.1
3	18525.00	52.0 PK	74.0	-22.0	2.41 V	160	55.9	-3.9
4	18525.00	40.3 AV	54.0	-13.7	2.41 V	160	44.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.4 PK	88.2	-43.8	2.20 H	206	32.5	11.9
2	#12830.00	33.5 AV	68.2	-34.7	2.20 H	206	21.6	11.9
3	19245.00	48.3 PK	74.0	-25.7	2.20 H	144	52.2	-3.9
4	19245.00	37.4 AV	54.0	-16.6	2.20 H	144	41.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.5 PK	88.2	-42.7	2.56 V	209	33.6	11.9
2	#12830.00	35.3 AV	68.2	-32.9	2.56 V	209	23.4	11.9
3	19245.00	51.6 PK	74.0	-22.4	2.51 V	149	55.5	-3.9
4	19245.00	40.3 AV	54.0	-13.7	2.51 V	149	44.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.5 PK	88.2	-44.7	2.22 H	213	31.1	12.4
2	#13070.00	33.0 AV	68.2	-35.2	2.22 H	213	20.6	12.4
3	19605.00	49.1 PK	74.0	-24.9	2.14 H	144	52.7	-3.6
4	19605.00	37.9 AV	54.0	-16.1	2.14 H	144	41.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.9 PK	88.2	-43.3	2.54 V	213	32.5	12.4
2	#13070.00	35.0 AV	68.2	-33.2	2.54 V	213	22.6	12.4
3	19605.00	51.8 PK	74.0	-22.2	2.51 V	170	55.4	-3.6
4	19605.00	40.5 AV	54.0	-13.5	2.51 V	170	44.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	44.1 PK	74.0	-29.9	2.14 H	223	30.9	13.2
2	13390.00	33.4 AV	54.0	-20.6	2.14 H	223	20.2	13.2
3	20085.00	49.0 PK	74.0	-25.0	2.20 H	130	52.3	-3.3
4	20085.00	37.8 AV	54.0	-16.2	2.20 H	130	41.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	45.2 PK	74.0	-28.8	2.60 V	220	32.0	13.2
2	13390.00	34.8 AV	54.0	-19.2	2.60 V	220	21.6	13.2
3	20085.00	51.3 PK	74.0	-22.7	2.41 V	155	54.6	-3.3
4	20085.00	40.2 AV	54.0	-13.8	2.41 V	155	43.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	43.7 PK	88.2	-44.5	2.17 H	206	29.6	14.1
2	#13710.00	32.8 AV	68.2	-35.4	2.17 H	206	18.7	14.1
3	20565.00	48.5 PK	74.0	-25.5	2.19 H	142	51.4	-2.9
4	20565.00	37.6 AV	54.0	-16.4	2.19 H	142	40.5	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.3 PK	88.2	-43.9	2.54 V	210	30.2	14.1
2	#13710.00	34.4 AV	68.2	-33.8	2.54 V	210	20.3	14.1
3	20565.00	51.8 PK	74.0	-22.2	2.46 V	165	54.7	-2.9
4	20565.00	40.3 AV	54.0	-13.7	2.46 V	165	43.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	43.9 PK	74.0	-30.1	2.21 H	218	32.4	11.5
2	11930.00	32.9 AV	54.0	-21.1	2.21 H	218	21.4	11.5
3	17895.00	48.2 PK	74.0	-25.8	2.13 H	126	24.3	23.9
4	17895.00	37.5 AV	54.0	-16.5	2.13 H	126	13.6	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	45.0 PK	74.0	-29.0	2.54 V	200	33.5	11.5
2	11930.00	35.2 AV	54.0	-18.8	2.54 V	200	23.7	11.5
3	17895.00	52.2 PK	74.0	-21.8	2.45 V	156	28.3	23.9
4	17895.00	40.6 AV	54.0	-13.4	2.45 V	156	16.7	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	44.4 PK	74.0	-29.6	2.18 H	207	32.1	12.3
2	12330.00	33.4 AV	54.0	-20.6	2.18 H	207	21.1	12.3
3	18495.00	48.9 PK	74.0	-25.1	2.16 H	145	52.8	-3.9
4	18495.00	38.0 AV	54.0	-16.0	2.16 H	145	41.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	45.5 PK	74.0	-28.5	2.56 V	197	33.2	12.3
2	12330.00	35.3 AV	54.0	-18.7	2.56 V	197	23.0	12.3
3	18495.00	51.6 PK	74.0	-22.4	2.40 V	159	55.5	-3.9
4	18495.00	40.3 AV	54.0	-13.7	2.40 V	159	44.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	43.8 PK	88.2	-44.4	2.13 H	205	32.1	11.7
2	#12810.00	32.8 AV	68.2	-35.4	2.13 H	205	21.1	11.7
3	19215.00	48.7 PK	74.0	-25.3	2.14 H	130	52.6	-3.9
4	19215.00	38.0 AV	54.0	-16.0	2.14 H	130	41.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	44.9 PK	88.2	-43.3	2.50 V	225	33.2	11.7
2	#12810.00	35.0 AV	68.2	-33.2	2.50 V	225	23.3	11.7
3	19215.00	52.3 PK	74.0	-21.7	2.49 V	165	56.2	-3.9
4	19215.00	40.7 AV	54.0	-13.3	2.49 V	165	44.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	44.2 PK	88.2	-44.0	2.22 H	231	31.6	12.6
2	#13130.00	33.5 AV	68.2	-34.7	2.22 H	231	20.9	12.6
3	19695.00	49.1 PK	74.0	-24.9	2.22 H	140	52.6	-3.5
4	19695.00	37.9 AV	54.0	-16.1	2.22 H	140	41.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	45.5 PK	88.2	-42.7	2.57 V	203	32.9	12.6
2	#13130.00	35.4 AV	68.2	-32.8	2.57 V	203	22.8	12.6
3	19695.00	52.2 PK	74.0	-21.8	2.45 V	150	55.7	-3.5
4	19695.00	40.5 AV	54.0	-13.5	2.45 V	150	44.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	43.5 PK	88.2	-44.7	2.13 H	215	30.1	13.4
2	#13450.00	32.8 AV	68.2	-35.4	2.13 H	215	19.4	13.4
3	20175.00	48.6 PK	74.0	-25.4	2.18 H	155	51.8	-3.2
4	20175.00	37.4 AV	54.0	-16.6	2.18 H	155	40.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	44.7 PK	88.2	-43.5	2.53 V	213	31.3	13.4
2	#13450.00	34.6 AV	68.2	-33.6	2.53 V	213	21.2	13.4
3	20175.00	51.5 PK	74.0	-22.5	2.50 V	171	54.7	-3.2
4	20175.00	40.1 AV	54.0	-13.9	2.50 V	171	43.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	43.7 PK	88.2	-44.5	2.17 H	225	29.5	14.2
2	#13690.00	33.2 AV	68.2	-35.0	2.17 H	225	19.0	14.2
3	20535.00	48.8 PK	74.0	-25.2	2.18 H	156	51.7	-2.9
4	20535.00	37.7 AV	54.0	-16.3	2.18 H	156	40.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	45.3 PK	88.2	-42.9	2.51 V	196	31.1	14.2
2	#13690.00	35.4 AV	68.2	-32.8	2.51 V	196	21.2	14.2
3	20535.00	51.7 PK	74.0	-22.3	2.40 V	161	54.6	-2.9
4	20535.00	40.1 AV	54.0	-13.9	2.40 V	161	43.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	44.4 PK	74.0	-29.6	2.13 H	215	32.9	11.5
2	11970.00	33.6 AV	54.0	-20.4	2.13 H	215	22.1	11.5
3	17955.00	48.5 PK	74.0	-25.5	2.16 H	146	22.8	25.7
4	17955.00	37.8 AV	54.0	-16.2	2.16 H	146	12.1	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	44.9 PK	74.0	-29.1	2.51 V	223	33.4	11.5
2	11970.00	35.0 AV	54.0	-19.0	2.51 V	223	23.5	11.5
3	17955.00	52.0 PK	74.0	-22.0	2.48 V	144	26.3	25.7
4	17955.00	40.7 AV	54.0	-13.3	2.48 V	144	15.0	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	43.3 PK	74.0	-30.7	2.18 H	229	30.9	12.4
2	12290.00	32.8 AV	54.0	-21.2	2.18 H	229	20.4	12.4
3	18435.00	48.7 PK	74.0	-25.3	2.11 H	150	52.8	-4.1
4	18435.00	37.6 AV	54.0	-16.4	2.11 H	150	41.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	44.7 PK	74.0	-29.3	2.51 V	219	32.3	12.4
2	12290.00	34.4 AV	54.0	-19.6	2.51 V	219	22.0	12.4
3	18435.00	51.6 PK	74.0	-22.4	2.45 V	168	55.7	-4.1
4	18435.00	40.2 AV	54.0	-13.8	2.45 V	168	44.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	43.8 PK	88.2	-44.4	2.14 H	205	32.2	11.6
2	#12770.00	33.0 AV	68.2	-35.2	2.14 H	205	21.4	11.6
3	19155.00	48.5 PK	74.0	-25.5	2.17 H	147	52.4	-3.9
4	19155.00	37.6 AV	54.0	-16.4	2.17 H	147	41.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	45.2 PK	88.2	-43.0	2.55 V	209	33.6	11.6
2	#12770.00	35.2 AV	68.2	-33.0	2.55 V	209	23.6	11.6
3	19155.00	51.7 PK	74.0	-22.3	2.48 V	165	55.6	-3.9
4	19155.00	40.4 AV	54.0	-13.6	2.48 V	165	44.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	44.1 PK	74.0	-29.9	2.17 H	210	31.1	13.0
2	13250.00	33.2 AV	54.0	-20.8	2.17 H	210	20.2	13.0
3	19875.00	48.9 PK	74.0	-25.1	2.16 H	158	52.0	-3.1
4	19875.00	37.8 AV	54.0	-16.2	2.16 H	158	40.9	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	45.6 PK	74.0	-28.4	2.50 V	209	32.6	13.0
2	13250.00	35.3 AV	54.0	-18.7	2.50 V	209	22.3	13.0
3	19875.00	52.1 PK	74.0	-21.9	2.49 V	152	55.2	-3.1
4	19875.00	40.6 AV	54.0	-13.4	2.49 V	152	43.7	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	43.5 PK	88.2	-44.7	2.19 H	226	30.2	13.3
2	#13410.00	33.0 AV	68.2	-35.2	2.19 H	226	19.7	13.3
3	20115.00	48.3 PK	74.0	-25.7	2.21 H	139	51.6	-3.3
4	20115.00	37.6 AV	54.0	-16.4	2.21 H	139	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	44.9 PK	88.2	-43.3	2.53 V	196	31.6	13.3
2	#13410.00	34.7 AV	68.2	-33.5	2.53 V	196	21.4	13.3
3	20115.00	51.1 PK	74.0	-22.9	2.51 V	157	54.4	-3.3
4	20115.00	39.9 AV	54.0	-14.1	2.51 V	157	43.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	43.7 PK	88.2	-44.5	2.20 H	235	29.8	13.9
2	#13570.00	33.1 AV	68.2	-35.1	2.20 H	235	19.2	13.9
3	20355.00	48.9 PK	74.0	-25.1	2.20 H	139	51.8	-2.9
4	20355.00	38.1 AV	54.0	-15.9	2.20 H	139	41.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	45.4 PK	88.2	-42.8	2.57 V	202	31.5	13.9
2	#13570.00	35.3 AV	68.2	-32.9	2.57 V	202	21.4	13.9
3	20355.00	51.7 PK	74.0	-22.3	2.40 V	161	54.6	-2.9
4	20355.00	40.0 AV	54.0	-14.0	2.40 V	161	42.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.1 PK	74.0	-30.9	2.19 H	225	31.2	11.9
2	12050.00	32.6 AV	54.0	-21.4	2.19 H	225	20.7	11.9
3	18075.00	48.2 PK	74.0	-25.8	2.24 H	135	52.9	-4.7
4	18075.00	37.5 AV	54.0	-16.5	2.24 H	135	42.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	45.5 PK	74.0	-28.5	2.57 V	212	33.6	11.9
2	12050.00	35.3 AV	54.0	-18.7	2.57 V	212	23.4	11.9
3	18075.00	51.8 PK	74.0	-22.2	2.42 V	147	56.5	-4.7
4	18075.00	40.3 AV	54.0	-13.7	2.42 V	147	45.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	44.0 PK	74.0	-30.0	2.13 H	221	32.2	11.8
2	12370.00	33.4 AV	54.0	-20.6	2.13 H	221	21.6	11.8
3	18555.00	48.4 PK	74.0	-25.6	2.18 H	131	52.3	-3.9
4	18555.00	37.5 AV	54.0	-16.5	2.18 H	131	41.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	45.6 PK	74.0	-28.4	2.59 V	226	33.8	11.8
2	12370.00	35.4 AV	54.0	-18.6	2.59 V	226	23.6	11.8
3	18555.00	51.5 PK	74.0	-22.5	2.45 V	152	55.4	-3.9
4	18555.00	40.2 AV	54.0	-13.8	2.45 V	152	44.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	42.9 PK	74.0	-31.1	2.19 H	238	31.4	11.5
2	12690.00	32.6 AV	54.0	-21.4	2.19 H	238	21.1	11.5
3	19035.00	47.8 PK	74.0	-26.2	2.15 H	123	51.5	-3.7
4	19035.00	37.2 AV	54.0	-16.8	2.15 H	123	40.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.1 PK	74.0	-28.9	2.49 V	195	33.6	11.5
2	12690.00	35.3 AV	54.0	-18.7	2.49 V	195	23.8	11.5
3	19035.00	51.4 PK	74.0	-22.6	2.47 V	163	55.1	-3.7
4	19035.00	40.1 AV	54.0	-13.9	2.47 V	163	43.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	43.4 PK	74.0	-30.6	2.21 H	218	30.3	13.1
2	13330.00	32.9 AV	54.0	-21.1	2.21 H	218	19.8	13.1
3	19995.00	48.8 PK	74.0	-25.2	2.26 H	125	52.0	-3.2
4	19995.00	37.9 AV	54.0	-16.1	2.26 H	125	41.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.4 PK	74.0	-28.6	2.56 V	216	32.3	13.1
2	13330.00	35.3 AV	54.0	-18.7	2.56 V	216	22.2	13.1
3	19995.00	50.9 PK	74.0	-23.1	2.44 V	157	54.1	-3.2
4	19995.00	39.8 AV	54.0	-14.2	2.44 V	157	43.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.7 PK	74.0	-29.3	2.36 H	156	33.1	11.6
2	11870.00	34.9 AV	54.0	-19.1	2.36 H	156	23.3	11.6
3	17805.00	50.2 PK	74.0	-23.8	3.28 H	219	28.4	21.8
4	17805.00	39.3 AV	54.0	-14.7	3.28 H	219	17.5	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.2 PK	74.0	-26.8	3.00 V	139	35.6	11.6
2	11870.00	37.2 AV	54.0	-16.8	3.00 V	139	25.6	11.6
3	17805.00	53.3 PK	74.0	-20.7	1.96 V	227	31.5	21.8
4	17805.00	42.4 AV	54.0	-11.6	1.96 V	227	20.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.2 PK	74.0	-28.8	2.35 H	159	33.7	11.5
2	11910.00	35.1 AV	54.0	-18.9	2.35 H	159	23.6	11.5
3	17865.00	50.0 PK	74.0	-24.0	3.30 H	206	26.8	23.2
4	17865.00	39.0 AV	54.0	-15.0	3.30 H	206	15.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.0 PK	74.0	-27.0	2.99 V	154	35.5	11.5
2	11910.00	36.8 AV	54.0	-17.2	2.99 V	154	25.3	11.5
3	17865.00	52.7 PK	74.0	-21.3	2.00 V	214	29.5	23.2
4	17865.00	42.0 AV	54.0	-12.0	2.00 V	214	18.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.5 PK	88.2	-42.7	2.38 H	160	33.6	11.9
2	#12830.00	35.1 AV	68.2	-33.1	2.38 H	160	23.2	11.9
3	19245.00	49.8 PK	74.0	-24.2	3.36 H	194	53.7	-3.9
4	19245.00	38.8 AV	54.0	-15.2	3.36 H	194	42.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.4 PK	88.2	-41.8	2.99 V	142	34.5	11.9
2	#12830.00	36.4 AV	68.2	-31.8	2.99 V	142	24.5	11.9
3	19245.00	52.7 PK	74.0	-21.3	2.04 V	227	56.6	-3.9
4	19245.00	41.8 AV	54.0	-12.2	2.04 V	227	45.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.2 PK	88.2	-43.0	2.38 H	147	32.8	12.4
2	#13070.00	35.1 AV	68.2	-33.1	2.38 H	147	22.7	12.4
3	19605.00	49.5 PK	74.0	-24.5	3.32 H	196	53.1	-3.6
4	19605.00	38.6 AV	54.0	-15.4	3.32 H	196	42.2	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.8 PK	88.2	-41.4	3.02 V	169	34.4	12.4
2	#13070.00	36.6 AV	68.2	-31.6	3.02 V	169	24.2	12.4
3	19605.00	52.8 PK	74.0	-21.2	2.01 V	213	56.4	-3.6
4	19605.00	41.9 AV	54.0	-12.1	2.01 V	213	45.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.6 PK	88.2	-42.6	2.35 H	160	31.5	14.1
2	#13710.00	35.5 AV	68.2	-32.7	2.35 H	160	21.4	14.1
3	20565.00	49.8 PK	74.0	-24.2	3.33 H	211	52.7	-2.9
4	20565.00	38.6 AV	54.0	-15.4	3.33 H	211	41.5	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.2 PK	88.2	-41.0	2.97 V	142	33.1	14.1
2	#13710.00	37.1 AV	68.2	-31.1	2.97 V	142	23.0	14.1
3	20565.00	52.8 PK	74.0	-21.2	2.05 V	204	55.7	-2.9
4	20565.00	42.2 AV	54.0	-11.8	2.05 V	204	45.1	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.3 PK	74.0	-28.7	2.25 H	133	33.7	11.6
2	11870.00	35.1 AV	54.0	-18.9	2.25 H	133	23.5	11.6
3	17805.00	49.5 PK	74.0	-24.5	3.30 H	212	27.7	21.8
4	17805.00	38.6 AV	54.0	-15.4	3.30 H	212	16.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.1 PK	74.0	-26.9	3.01 V	135	35.5	11.6
2	11870.00	36.9 AV	54.0	-17.1	3.01 V	135	25.3	11.6
3	17805.00	52.6 PK	74.0	-21.4	1.95 V	207	30.8	21.8
4	17805.00	42.0 AV	54.0	-12.0	1.95 V	207	20.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.8 PK	74.0	-29.2	2.29 H	147	33.3	11.5
2	11910.00	34.7 AV	54.0	-19.3	2.29 H	147	23.2	11.5
3	17865.00	49.4 PK	74.0	-24.6	3.35 H	212	26.2	23.2
4	17865.00	38.5 AV	54.0	-15.5	3.35 H	212	15.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.6 PK	74.0	-27.4	2.96 V	146	35.1	11.5
2	11910.00	36.4 AV	54.0	-17.6	2.96 V	146	24.9	11.5
3	17865.00	53.1 PK	74.0	-20.9	1.95 V	204	29.9	23.2
4	17865.00	42.3 AV	54.0	-11.7	1.95 V	204	19.1	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.3 PK	88.2	-42.9	2.39 H	163	33.4	11.9
2	#12830.00	35.1 AV	68.2	-33.1	2.39 H	163	23.2	11.9
3	19245.00	49.8 PK	74.0	-24.2	3.24 H	222	53.7	-3.9
4	19245.00	39.1 AV	54.0	-14.9	3.24 H	222	43.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.9 PK	88.2	-41.3	2.97 V	153	35.0	11.9
2	#12830.00	36.8 AV	68.2	-31.4	2.97 V	153	24.9	11.9
3	19245.00	53.2 PK	74.0	-20.8	1.95 V	217	57.1	-3.9
4	19245.00	42.2 AV	54.0	-11.8	1.95 V	217	46.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.6 PK	88.2	-43.6	2.32 H	150	32.2	12.4
2	#13070.00	34.8 AV	68.2	-33.4	2.32 H	150	22.4	12.4
3	19605.00	49.5 PK	74.0	-24.5	3.28 H	194	53.1	-3.6
4	19605.00	38.6 AV	54.0	-15.4	3.28 H	194	42.2	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.5 PK	88.2	-41.7	3.02 V	154	34.1	12.4
2	#13070.00	36.5 AV	68.2	-31.7	3.02 V	154	24.1	12.4
3	19605.00	52.0 PK	74.0	-22.0	2.02 V	210	55.6	-3.6
4	19605.00	41.5 AV	54.0	-12.5	2.02 V	210	45.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.8 PK	88.2	-42.4	2.31 H	158	31.7	14.1
2	#13710.00	35.6 AV	68.2	-32.6	2.31 H	158	21.5	14.1
3	20565.00	49.9 PK	74.0	-24.1	3.34 H	217	52.8	-2.9
4	20565.00	38.8 AV	54.0	-15.2	3.34 H	217	41.7	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.4 PK	88.2	-40.8	3.05 V	158	33.3	14.1
2	#13710.00	37.2 AV	68.2	-31.0	3.05 V	158	23.1	14.1
3	20565.00	52.6 PK	74.0	-21.4	1.98 V	208	55.5	-2.9
4	20565.00	41.9 AV	54.0	-12.1	1.98 V	208	44.8	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.8 PK	74.0	-28.2	2.36 H	154	34.2	11.6
2	11870.00	34.9 AV	54.0	-19.1	2.36 H	154	23.3	11.6
3	17805.00	50.0 PK	74.0	-24.0	3.30 H	206	28.2	21.8
4	17805.00	39.1 AV	54.0	-14.9	3.30 H	206	17.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.1 PK	74.0	-27.9	3.07 V	160	34.5	11.6
2	11870.00	36.2 AV	54.0	-17.8	3.07 V	160	24.6	11.6
3	17805.00	52.1 PK	74.0	-21.9	1.99 V	223	30.3	21.8
4	17805.00	41.7 AV	54.0	-12.3	1.99 V	223	19.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.3 PK	74.0	-28.7	2.40 H	158	33.8	11.5
2	11910.00	35.2 AV	54.0	-18.8	2.40 H	158	23.7	11.5
3	17865.00	50.2 PK	74.0	-23.8	3.31 H	206	27.0	23.2
4	17865.00	39.2 AV	54.0	-14.8	3.31 H	206	16.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.6 PK	74.0	-27.4	3.04 V	150	35.1	11.5
2	11910.00	36.5 AV	54.0	-17.5	3.04 V	150	25.0	11.5
3	17865.00	52.3 PK	74.0	-21.7	1.97 V	224	29.1	23.2
4	17865.00	41.8 AV	54.0	-12.2	1.97 V	224	18.6	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.7 PK	88.2	-43.5	2.33 H	161	32.8	11.9
2	#12830.00	34.9 AV	68.2	-33.3	2.33 H	161	23.0	11.9
3	19245.00	49.9 PK	74.0	-24.1	3.27 H	192	53.8	-3.9
4	19245.00	38.6 AV	54.0	-15.4	3.27 H	192	42.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.0 PK	88.2	-41.2	3.04 V	166	35.1	11.9
2	#12830.00	36.8 AV	68.2	-31.4	3.04 V	166	24.9	11.9
3	19245.00	53.3 PK	74.0	-20.7	2.00 V	213	57.2	-3.9
4	19245.00	42.4 AV	54.0	-11.6	2.00 V	213	46.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.5 PK	88.2	-42.7	2.33 H	164	33.1	12.4
2	#13070.00	35.5 AV	68.2	-32.7	2.33 H	164	23.1	12.4
3	19605.00	49.8 PK	74.0	-24.2	3.24 H	203	53.4	-3.6
4	19605.00	39.0 AV	54.0	-15.0	3.24 H	203	42.6	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.1 PK	88.2	-41.1	3.05 V	142	34.7	12.4
2	#13070.00	37.2 AV	68.2	-31.0	3.05 V	142	24.8	12.4
3	19605.00	52.8 PK	74.0	-21.2	2.00 V	203	56.4	-3.6
4	19605.00	42.1 AV	54.0	-11.9	2.00 V	203	45.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.1 PK	88.2	-43.1	2.30 H	157	31.0	14.1
2	#13710.00	35.1 AV	68.2	-33.1	2.30 H	157	21.0	14.1
3	20565.00	50.1 PK	74.0	-23.9	3.32 H	195	53.0	-2.9
4	20565.00	39.1 AV	54.0	-14.9	3.32 H	195	42.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.8 PK	88.2	-41.4	2.98 V	160	32.7	14.1
2	#13710.00	36.5 AV	68.2	-31.7	2.98 V	160	22.4	14.1
3	20565.00	52.9 PK	74.0	-21.1	2.03 V	222	55.8	-2.9
4	20565.00	42.5 AV	54.0	-11.5	2.03 V	222	45.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.9 PK	74.0	-28.1	2.49 H	159	34.3	11.6
2	11870.00	36.1 AV	54.0	-17.9	2.49 H	159	24.5	11.6
3	17805.00	49.9 PK	74.0	-24.1	3.23 H	232	28.1	21.8
4	17805.00	38.6 AV	54.0	-15.4	3.23 H	232	16.8	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.8 PK	74.0	-27.2	2.98 V	172	35.2	11.6
2	11870.00	36.6 AV	54.0	-17.4	2.98 V	172	25.0	11.6
3	17805.00	53.1 PK	74.0	-20.9	2.00 V	204	31.3	21.8
4	17805.00	42.1 AV	54.0	-11.9	2.00 V	204	20.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.6 PK	74.0	-27.4	2.44 H	166	35.1	11.5
2	11910.00	36.5 AV	54.0	-17.5	2.44 H	166	25.0	11.5
3	17865.00	49.8 PK	74.0	-24.2	3.25 H	220	26.6	23.2
4	17865.00	38.5 AV	54.0	-15.5	3.25 H	220	15.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	2.96 V	162	35.8	11.5
2	11910.00	36.9 AV	54.0	-17.1	2.96 V	162	25.4	11.5
3	17865.00	53.2 PK	74.0	-20.8	2.03 V	218	30.0	23.2
4	17865.00	42.4 AV	54.0	-11.6	2.03 V	218	19.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.0 PK	88.2	-42.2	2.42 H	172	34.1	11.9
2	#12830.00	36.2 AV	68.2	-32.0	2.42 H	172	24.3	11.9
3	19245.00	50.3 PK	74.0	-23.7	3.31 H	210	54.2	-3.9
4	19245.00	38.9 AV	54.0	-15.1	3.31 H	210	42.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.5 PK	88.2	-40.7	3.02 V	147	35.6	11.9
2	#12830.00	37.3 AV	68.2	-30.9	3.02 V	147	25.4	11.9
3	19245.00	53.2 PK	74.0	-20.8	1.99 V	212	57.1	-3.9
4	19245.00	42.4 AV	54.0	-11.6	1.99 V	212	46.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.1 PK	88.2	-42.1	2.43 H	160	33.7	12.4
2	#13070.00	36.6 AV	68.2	-31.6	2.43 H	160	24.2	12.4
3	19605.00	50.5 PK	74.0	-23.5	3.23 H	218	54.1	-3.6
4	19605.00	39.0 AV	54.0	-15.0	3.23 H	218	42.6	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.9 PK	88.2	-41.3	2.99 V	150	34.5	12.4
2	#13070.00	36.8 AV	68.2	-31.4	2.99 V	150	24.4	12.4
3	19605.00	53.6 PK	74.0	-20.4	2.01 V	207	57.2	-3.6
4	19605.00	42.5 AV	54.0	-11.5	2.01 V	207	46.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.9 PK	88.2	-42.3	2.35 H	173	31.8	14.1
2	#13710.00	36.1 AV	68.2	-32.1	2.35 H	173	22.0	14.1
3	20565.00	50.1 PK	74.0	-23.9	3.25 H	222	53.0	-2.9
4	20565.00	38.7 AV	54.0	-15.3	3.25 H	222	41.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.3 PK	88.2	-40.9	3.02 V	176	33.2	14.1
2	#13710.00	37.0 AV	68.2	-31.2	3.02 V	176	22.9	14.1
3	20565.00	53.0 PK	74.0	-21.0	2.02 V	208	55.9	-2.9
4	20565.00	42.5 AV	54.0	-11.5	2.02 V	208	45.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.3 PK	74.0	-29.7	2.27 H	135	32.7	11.6
2	11870.00	34.1 AV	54.0	-19.9	2.27 H	135	22.5	11.6
3	17805.00	49.4 PK	74.0	-24.6	3.38 H	200	27.6	21.8
4	17805.00	40.3 AV	54.0	-13.7	3.38 H	200	18.5	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.5 PK	74.0	-27.5	2.99 V	138	34.9	11.6
2	11870.00	36.4 AV	54.0	-17.6	2.99 V	138	24.8	11.6
3	17805.00	52.6 PK	74.0	-21.4	1.98 V	216	30.8	21.8
4	17805.00	42.7 AV	54.0	-11.3	1.98 V	216	20.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.8 PK	74.0	-29.2	2.30 H	148	33.3	11.5
2	11910.00	34.6 AV	54.0	-19.4	2.30 H	148	23.1	11.5
3	17865.00	49.5 PK	74.0	-24.5	3.33 H	193	26.3	23.2
4	17865.00	38.7 AV	54.0	-15.3	3.33 H	193	15.5	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.2 PK	74.0	-26.8	2.94 V	139	35.7	11.5
2	11910.00	36.8 AV	54.0	-17.2	2.94 V	139	25.3	11.5
3	17865.00	53.0 PK	74.0	-21.0	1.99 V	206	29.8	23.2
4	17865.00	42.3 AV	54.0	-11.7	1.99 V	206	19.1	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.4 PK	88.2	-41.8	2.40 H	174	34.5	11.9
2	#12830.00	36.4 AV	68.2	-31.8	2.40 H	174	24.5	11.9
3	19245.00	50.2 PK	74.0	-23.8	3.29 H	210	54.1	-3.9
4	19245.00	39.0 AV	54.0	-15.0	3.29 H	210	42.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.9 PK	88.2	-41.3	2.95 V	155	35.0	11.9
2	#12830.00	36.8 AV	68.2	-31.4	2.95 V	155	24.9	11.9
3	19245.00	52.9 PK	74.0	-21.1	1.98 V	222	56.8	-3.9
4	19245.00	42.1 AV	54.0	-11.9	1.98 V	222	46.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.8 PK	88.2	-42.4	2.38 H	164	33.4	12.4
2	#13070.00	36.1 AV	68.2	-32.1	2.38 H	164	23.7	12.4
3	19605.00	50.7 PK	74.0	-23.3	3.32 H	211	54.3	-3.6
4	19605.00	39.4 AV	54.0	-14.6	3.32 H	211	43.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.5 PK	88.2	-40.7	2.99 V	158	35.1	12.4
2	#13070.00	37.3 AV	68.2	-30.9	2.99 V	158	24.9	12.4
3	19605.00	52.3 PK	74.0	-21.7	1.97 V	223	55.9	-3.6
4	19605.00	41.5 AV	54.0	-12.5	1.97 V	223	45.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.0 PK	88.2	-41.2	2.45 H	172	32.9	14.1
2	#13710.00	36.8 AV	68.2	-31.4	2.45 H	172	22.7	14.1
3	20565.00	49.9 PK	74.0	-24.1	3.29 H	202	52.8	-2.9
4	20565.00	38.8 AV	54.0	-15.2	3.29 H	202	41.7	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.7 PK	88.2	-41.5	2.98 V	164	32.6	14.1
2	#13710.00	36.5 AV	68.2	-31.7	2.98 V	164	22.4	14.1
3	20565.00	52.6 PK	74.0	-21.4	2.01 V	229	55.5	-2.9
4	20565.00	42.1 AV	54.0	-11.9	2.01 V	229	45.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.7 PK	74.0	-28.3	2.34 H	160	34.2	11.5
2	11970.00	35.9 AV	54.0	-18.1	2.34 H	160	24.4	11.5
3	17955.00	50.0 PK	74.0	-24.0	3.31 H	196	24.3	25.7
4	17955.00	38.6 AV	54.0	-15.4	3.31 H	196	12.9	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	46.9 PK	74.0	-27.1	2.92 V	175	35.4	11.5
2	11970.00	36.7 AV	54.0	-17.3	2.92 V	175	25.2	11.5
3	17955.00	53.9 PK	74.0	-20.1	2.05 V	213	28.2	25.7
4	17955.00	42.8 AV	54.0	-11.2	2.05 V	213	17.1	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.6 PK	88.2	-41.6	2.40 H	145	35.0	11.6
2	#12770.00	37.0 AV	68.2	-31.2	2.40 H	145	25.4	11.6
3	19155.00	50.7 PK	74.0	-23.3	3.22 H	217	54.6	-3.9
4	19155.00	38.9 AV	54.0	-15.1	3.22 H	217	42.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.7 PK	88.2	-40.5	3.00 V	177	36.1	11.6
2	#12770.00	37.2 AV	68.2	-31.0	3.00 V	177	25.6	11.6
3	19155.00	53.0 PK	74.0	-21.0	2.07 V	215	56.9	-3.9
4	19155.00	42.1 AV	54.0	-11.9	2.07 V	215	46.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	46.0 PK	74.0	-28.0	2.38 H	154	33.0	13.0
2	13250.00	36.2 AV	54.0	-17.8	2.38 H	154	23.2	13.0
3	19875.00	50.7 PK	74.0	-23.3	3.29 H	223	53.8	-3.1
4	19875.00	39.1 AV	54.0	-14.9	3.29 H	223	42.2	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	48.0 PK	74.0	-26.0	2.96 V	172	35.0	13.0
2	13250.00	37.3 AV	54.0	-16.7	2.96 V	172	24.3	13.0
3	19875.00	53.8 PK	74.0	-20.2	1.97 V	205	56.9	-3.1
4	19875.00	42.8 AV	54.0	-11.2	1.97 V	205	45.9	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	46.0 PK	88.2	-42.2	2.48 H	174	32.1	13.9
2	#13570.00	36.5 AV	68.2	-31.7	2.48 H	174	22.6	13.9
3	20355.00	50.6 PK	74.0	-23.4	3.29 H	205	53.5	-2.9
4	20355.00	38.8 AV	54.0	-15.2	3.29 H	205	41.7	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	46.9 PK	88.2	-41.3	2.94 V	154	33.0	13.9
2	#13570.00	36.8 AV	68.2	-31.4	2.94 V	154	22.9	13.9
3	20355.00	53.2 PK	74.0	-20.8	2.07 V	214	56.1	-2.9
4	20355.00	42.6 AV	54.0	-11.4	2.07 V	214	45.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.7 PK	74.0	-27.3	2.47 H	151	34.8	11.9
2	12050.00	36.9 AV	54.0	-17.1	2.47 H	151	25.0	11.9
3	18075.00	50.7 PK	74.0	-23.3	3.21 H	216	55.4	-4.7
4	18075.00	39.1 AV	54.0	-14.9	3.21 H	216	43.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.4 PK	74.0	-26.6	3.01 V	151	35.5	11.9
2	12050.00	37.0 AV	54.0	-17.0	3.01 V	151	25.1	11.9
3	18075.00	52.8 PK	74.0	-21.2	2.00 V	222	57.5	-4.7
4	18075.00	41.9 AV	54.0	-12.1	2.00 V	222	46.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.9 PK	74.0	-28.1	2.39 H	146	34.4	11.5
2	12690.00	36.6 AV	54.0	-17.4	2.39 H	146	25.1	11.5
3	19035.00	50.6 PK	74.0	-23.4	3.22 H	206	54.3	-3.7
4	19035.00	38.9 AV	54.0	-15.1	3.22 H	206	42.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.6 PK	74.0	-26.4	2.93 V	158	36.1	11.5
2	12690.00	37.3 AV	54.0	-16.7	2.93 V	158	25.8	11.5
3	19035.00	52.8 PK	74.0	-21.2	1.99 V	211	56.5	-3.7
4	19035.00	42.0 AV	54.0	-12.0	1.99 V	211	45.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.4 PK	74.0	-27.6	2.42 H	154	33.3	13.1
2	13330.00	36.9 AV	54.0	-17.1	2.42 H	154	23.8	13.1
3	19995.00	50.8 PK	74.0	-23.2	3.18 H	209	54.0	-3.2
4	19995.00	39.5 AV	54.0	-14.5	3.18 H	209	42.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.1 PK	74.0	-26.9	2.92 V	159	34.0	13.1
2	13330.00	36.6 AV	54.0	-17.4	2.92 V	159	23.5	13.1
3	19995.00	53.8 PK	74.0	-20.2	2.04 V	219	57.0	-3.2
4	19995.00	42.8 AV	54.0	-11.2	2.04 V	219	46.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	45.7 PK	74.0	-28.3	2.38 H	145	33.8	11.9
2	12050.00	36.4 AV	54.0	-17.6	2.38 H	145	24.5	11.9
3	18075.00	50.2 PK	74.0	-23.8	3.24 H	207	54.9	-4.7
4	18075.00	38.9 AV	54.0	-15.1	3.24 H	207	43.6	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.8 PK	74.0	-27.2	3.00 V	169	34.9	11.9
2	12050.00	36.6 AV	54.0	-17.4	3.00 V	169	24.7	11.9
3	18075.00	52.9 PK	74.0	-21.1	2.02 V	221	57.6	-4.7
4	18075.00	42.3 AV	54.0	-11.7	2.02 V	221	47.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.8 PK	74.0	-28.2	2.46 H	175	34.3	11.5
2	12690.00	36.5 AV	54.0	-17.5	2.46 H	175	25.0	11.5
3	19035.00	50.4 PK	74.0	-23.6	3.26 H	220	54.1	-3.7
4	19035.00	38.7 AV	54.0	-15.3	3.26 H	220	42.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.7 PK	74.0	-26.3	2.98 V	149	36.2	11.5
2	12690.00	37.2 AV	54.0	-16.8	2.98 V	149	25.7	11.5
3	19035.00	53.1 PK	74.0	-20.9	2.06 V	225	56.8	-3.7
4	19035.00	42.3 AV	54.0	-11.7	2.06 V	225	46.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.3 PK	74.0	-27.7	2.38 H	148	33.2	13.1
2	13330.00	36.9 AV	54.0	-17.1	2.38 H	148	23.8	13.1
3	19995.00	50.4 PK	74.0	-23.6	3.24 H	210	53.6	-3.2
4	19995.00	38.7 AV	54.0	-15.3	3.24 H	210	41.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.2 PK	74.0	-26.8	2.99 V	153	34.1	13.1
2	13330.00	36.7 AV	54.0	-17.3	2.99 V	153	23.6	13.1
3	19995.00	53.3 PK	74.0	-20.7	2.04 V	214	56.5	-3.2
4	19995.00	42.3 AV	54.0	-11.7	2.04 V	214	45.5	-3.2


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

Plot of Other Emission

under control of a Standard Power AP
Mode B


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

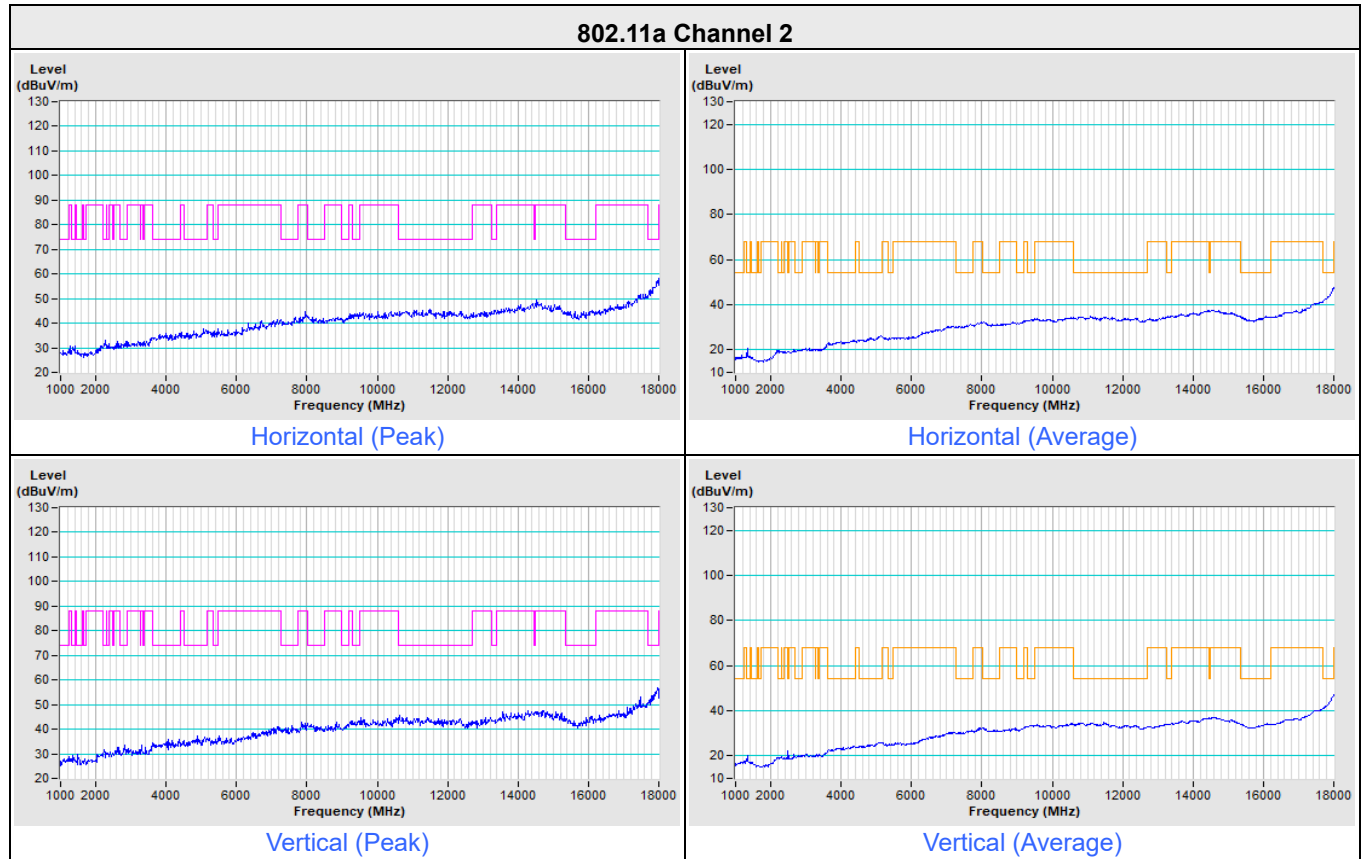

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

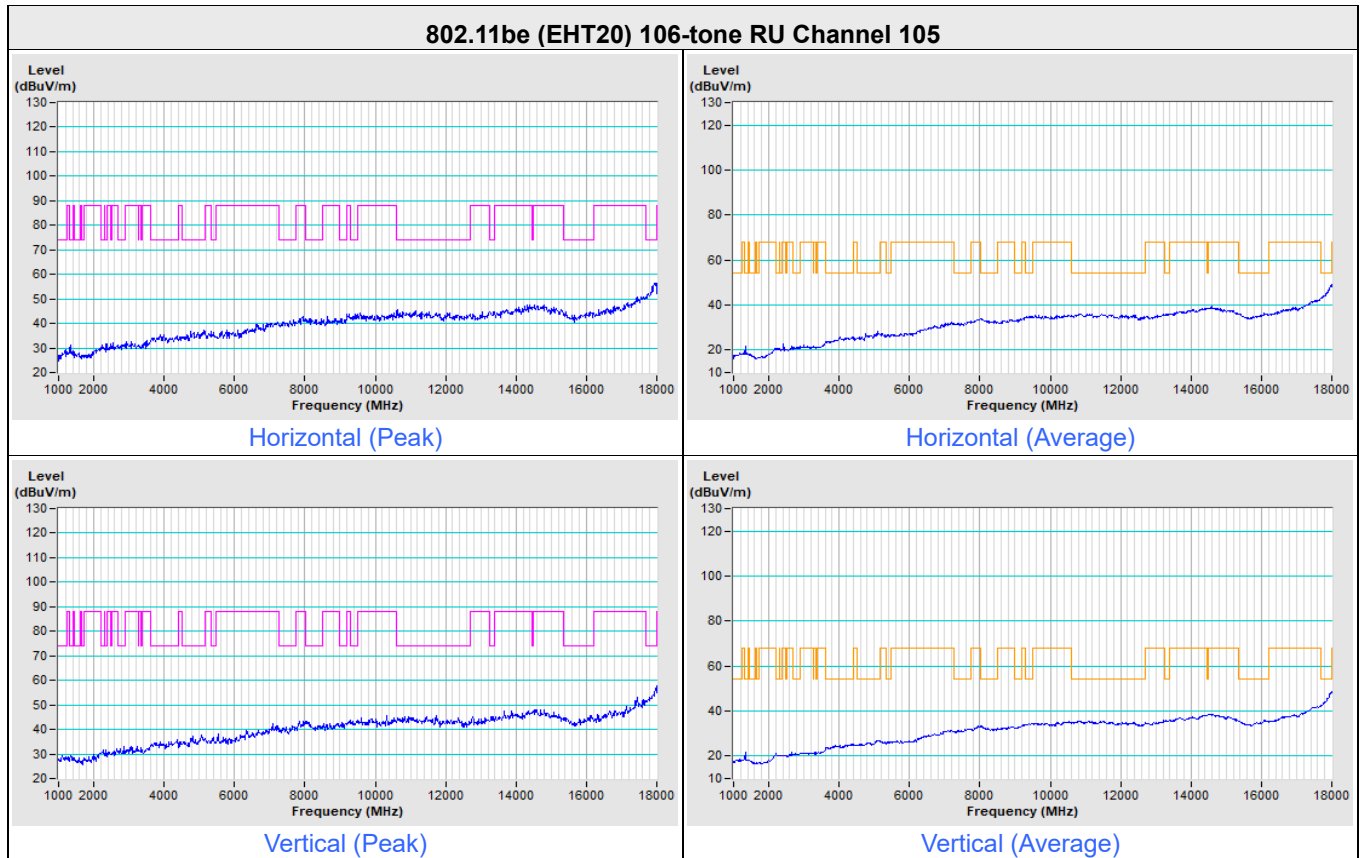

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

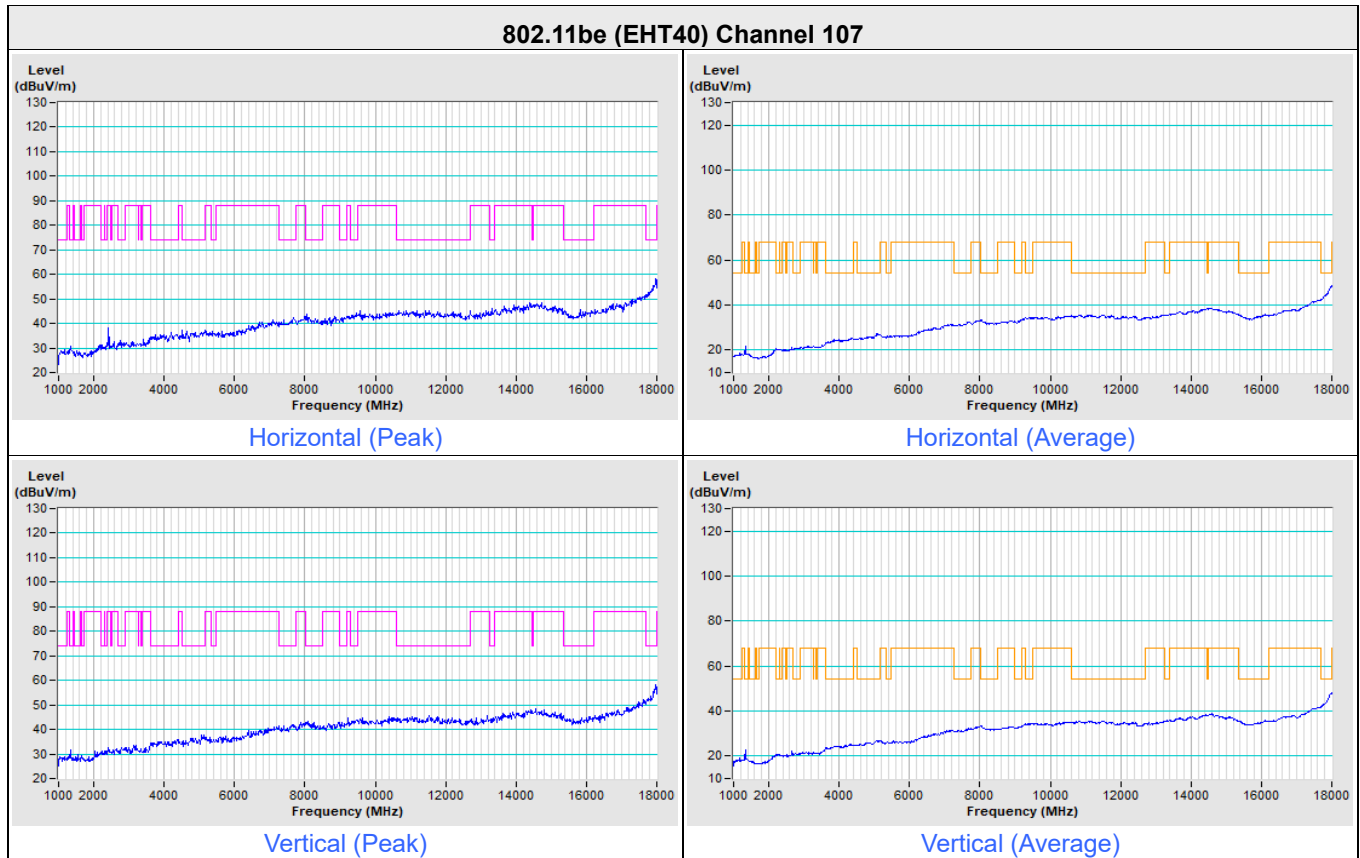

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

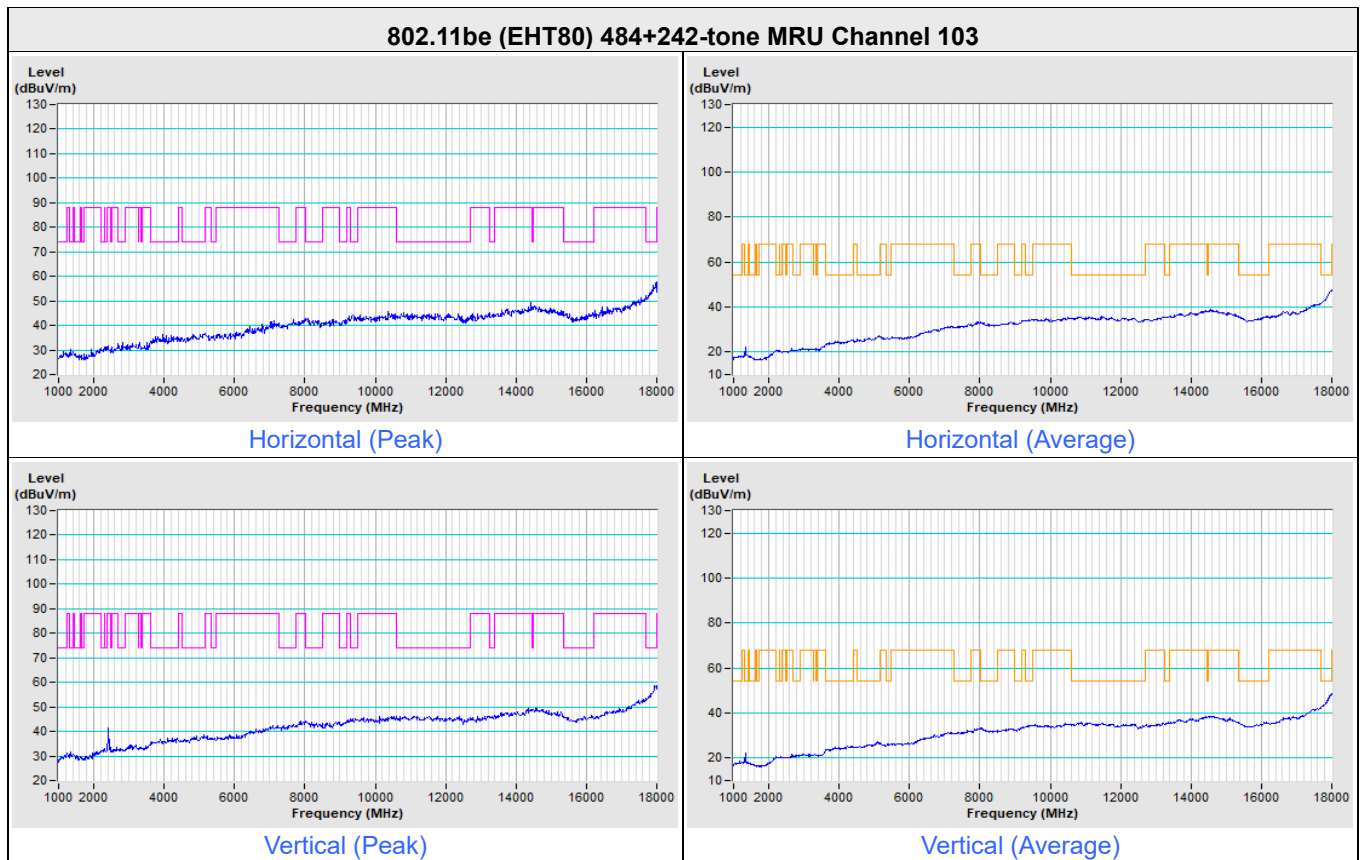

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

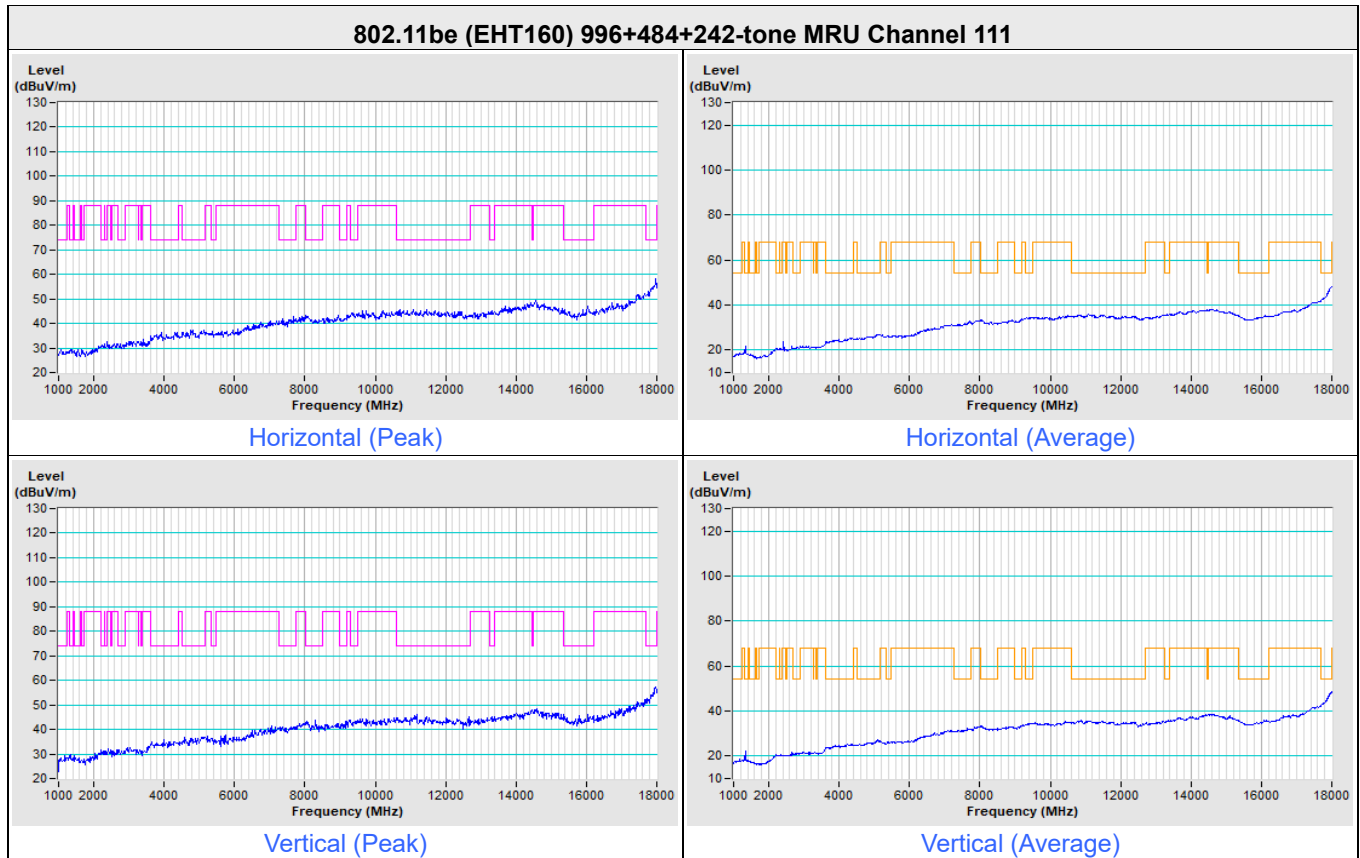

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

7.10 APC (Automatic Power Control) and Proper Power Adjustment

Environmental Conditions:	25°C, 60% RH	Tested By:	Vincent Huang
---------------------------	--------------	------------	---------------

For Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Associated AP Type	Conducted Power (dBm)		Total Power (dBm)	Directional Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
			Chain 0	Chain 1					
37	6135	Standard Power	14.19	14.12	17.17	4.76	21.93	30	Pass
		Low Power	-0.27	2.80	4.54	4.76	9.3	24	Pass

Note: EIRP (dBm) = Conducted Power (dBm) + Directional Gain (dBi)

Plot of Conducted Power on Associated Standard Power AP

Antenna. 1

	Current
Burst Power (dBm)	14.19
LTF Power (dBm)	13.92
Preamble Power (dBm)	14.15
Data Power (dBm)	14.24
Peak Power (dBm)	23.27
Crest Factor (dB)	9.08
IQ Offset (dB)	-50.85
DC Power (dBm)	-36.66
Gain Imbalance (dB)	-0.01
Quadrature Error (°)	-0.24

Antenna. 2

	Current
Burst Power (dBm)	14.12
LTF Power (dBm)	13.82
Preamble Power (dBm)	14.11
Data Power (dBm)	14.13
Peak Power (dBm)	23.27
Crest Factor (dB)	9.15
IQ Offset (dB)	-50.21
DC Power (dBm)	-36.10
Gain Imbalance (dB)	-0.01
Quadrature Error (°)	0.02

WLAN AP 0 > Transmit Power Control > Power Elements

No. of Transmit Power Elements 1

TPE 0

TX Enable	Interpretation	Category	Sub
☒	Local EIRP	Default	0

EIRP Configuration 20 MHz

Max TX Power (dBm) 30.0

Country Element

Enable ☒

Country Code US

Environment Outdoor

Country Table E1 US

Mapping User Defined

Mapping 1

Triplet Sequence...

Transmit Power Control

Power Constraint 0 dB

6GHz Regulatory Info Standard Power AP

Transmit Power Envelope User Defined

802.11be (EHT20) / CH37

Plot of Conducted Power on Associated Low Power indoor AP

▼ Antenna. 1	
	Current
Burst Power (dBm)	-0.27
LTF Power (dBm)	-0.49
Preamble Power (dBm)	-0.27
Data Power (dBm)	-0.27
Peak Power (dBm)	9.56
Crest Factor (dB)	9.83
IQ Offset (dB)	-39.99
DC Power (dBm)	-40.26
Gain Imbalance (dB)	0.00
Quadrature Error (°)	-0.03
▼ Antenna. 2	
	Current
Burst Power (dBm)	2.80
LTF Power (dBm)	2.54
Preamble Power (dBm)	2.77
Data Power (dBm)	2.84
Peak Power (dBm)	12.76
Crest Factor (dB)	9.96
IQ Offset (dB)	-50.52
DC Power (dBm)	-47.72
Gain Imbalance (dB)	-0.02
Quadrature Error (°)	0.06

WLAN AP 0 > Transmit Power Control > Power Elements

No. of Transmit Power Elements 1 Collapse Expand

▼ TPE 0

TX Enable	Interpretation	Category	
☒	Local EIRP	Default	0

EIRP Configuration 20 MHz

Max TX Power (dBm) 24.0

▼ Country Element

Enable ☒

Country Code US

Environment Indoor

Country Table E1 US

Mapping User Defined

Mapping 1

Triplet Sequence...

▼ Transmit Power Control

Power Constraint 0 dB

6GHz Regulatory Info Indoor AP

Transmit Power Envelope User Defined

TPE Configuration...

802.11be (EHT20) / CH37

Environmental Conditions:	25°C, 60% RH	Tested By:	Vincent Huang
---------------------------	--------------	------------	---------------

For Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Standard AP Registered EIRP (dBm)	Standard Client							Test Result
			Conducted Power (dBm)		Total Power (dBm)	Directional Gain (dBi)	EIRP (dBm)	Adjust Power Level (dB)	Adjust Power Level Limit (dB)	
			Chain 0	Chain 1						
37	6135	30	14.19	14.12	17.17	4.76	21.93	8.07	> 6	Pass
37	6135	23	8.91	8.85	11.89	4.76	16.65	6.35	> 6	Pass
37	6135	17	2.87	2.87	5.88	4.76	10.64	6.36	> 6	Pass

Notes:

1. EIRP (dBm) = Conducted Power (dBm) + Directional Gain (dBi)
2. Standard Client Adjust Power Level (dB) = Standard AP Registered EIRP (dBm) - Standard Client EIRP (dBm)

Plot of Standard Client Conducted Power when Standard AP Registered EIRP is 30 dBm

▼ Antenna. 1

	Current
Burst Power (dBm)	14.19
LTF Power (dBm)	13.92
Preamble Power (dBm)	14.15
Data Power (dBm)	14.24
Peak Power (dBm)	23.27
Crest Factor (dB)	9.08
IQ Offset (dB)	-50.85
DC Power (dBm)	-36.66
Gain Imbalance (dB)	-0.01
Quadrature Error (°)	-0.24

▼ Antenna. 2

	Current
Burst Power (dBm)	14.12
LTF Power (dBm)	13.82
Preamble Power (dBm)	14.11
Data Power (dBm)	14.13
Peak Power (dBm)	23.27
Crest Factor (dB)	9.15
IQ Offset (dB)	-50.21
DC Power (dBm)	-36.10
Gain Imbalance (dB)	-0.01
Quadrature Error (°)	0.02

WLAN AP 0 > Transmit Power Control > Power Elements

No. of Transmit Power Elements 1 Collapse Expand

▼ TPE 0

TX Enable	Interpretation	Category	Sub
☒	Local EIRP	Default	0

EIRP Configuration 20 MHz

Max TX Power (dBm) 30.0

▼ Country Element

Enable ☒

Country Code US

Environment Outdoor

Country Table E1 US

Mapping User Defined Mapping 1

Triplet Sequence...

▼ Transmit Power Control

Power Constraint 0 dB

6GHz Regulatory Info Standard Power AP

Transmit Power Envelope User Defined

ion 1.1 started

802.11be (EHT20) / CH37

Plot of Standard Client Conducted Power when Standard AP Registered EIRP is 23 dBm

Antenna. 1	
	Current
Burst Power (dBm)	8.91
LTF Power (dBm)	8.70
Preamble Power (dBm)	8.88
Data Power (dBm)	8.95
Peak Power (dBm)	18.08
Crest Factor (dB)	9.16
IQ Offset (dB)	-66.15
DC Power (dBm)	-57.23
Gain Imbalance (dB)	-0.02
Quadrature Error (°)	-0.12
Antenna. 2	
	Current
Burst Power (dBm)	8.85
LTF Power (dBm)	8.60
Preamble Power (dBm)	8.84
Data Power (dBm)	8.86
Peak Power (dBm)	18.64
Crest Factor (dB)	9.79
IQ Offset (dB)	-49.49
DC Power (dBm)	-40.64
Gain Imbalance (dB)	-0.03
Quadrature Error (°)	0.03

WLAN AP 0 > Transmit Power Control > Power Elements

No. of Transmit Power Elements 1

TPE 0

TX Enable	Interpretation	Category	Sub
☒	Local EIRP	Default	0

EIRP Configuration 20 MHz

Max TX Power (dBm) 23.0

Country Element

Enable ☒

Country Code US

Environment Outdoor

Country Table E1 US

Mapping User Defined

Mapping 1

Triplet Sequence...

Transmit Power Control

Power Constraint 0 dB

6GHz Regulatory Info Standard Power AP

Transmit Power Envelope User Defined

TPE Configuration...

802.11be (EHT20) / CH37

Plot of Standard Client Conducted Power when Standard AP Registered EIRP is 17 dBm

Antenna. 1	
	Current
Burst Power (dBm)	2.87
LTF Power (dBm)	2.69
Preamble Power (dBm)	2.88
Data Power (dBm)	2.87
Peak Power (dBm)	11.48
Crest Factor (dB)	8.61
IQ Offset (dB)	-44.73
DC Power (dBm)	-41.86
Gain Imbalance (dB)	0.00
Quadrature Error (°)	-0.03
Antenna. 2	
	Current
Burst Power (dBm)	2.87
LTF Power (dBm)	2.57
Preamble Power (dBm)	2.82
Data Power (dBm)	2.94
Peak Power (dBm)	11.10
Crest Factor (dB)	8.23
IQ Offset (dB)	-50.98
DC Power (dBm)	-48.11
Gain Imbalance (dB)	-0.01
Quadrature Error (°)	0.04

WLAN AP 0 > Transmit Power Control > Power Elements

No. of Transmit Power Elements 1

TPE 0

TX Enable	Interpretation	Category	Sub
☒	Local EIRP	Default	0

EIRP Configuration 20 MHz

Max TX Power (dBm) 17.0

Country Element

Enable ☒

Country Code US

Environment Outdoor

Country Table E1 US

Mapping User Defined

Mapping 1

Triplet Sequence...

Transmit Power Control

Power Constraint 0 dB

6GHz Regulatory Info Standard Power AP

Transmit Power Envelope User Defined

TPE Configuration...

802.11be (EHT20) / CH37

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety/SAR Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---