

Plots of EUT Tx waveform




802.11be (EHT20) / CH45




802.11be (EHT160) / CH47


Plots of Injected signal (AWGN) level

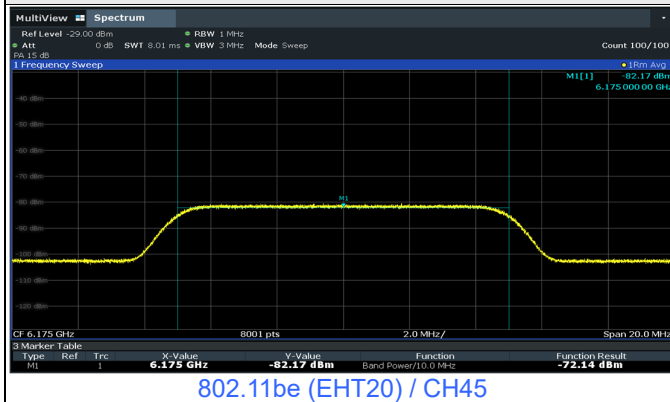


802.11be (EHT20) / CH45

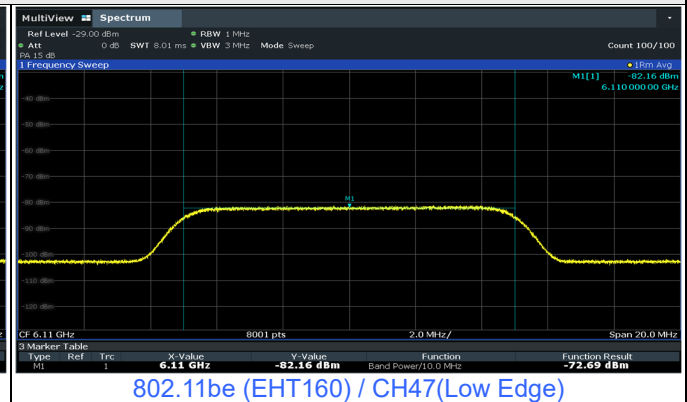

802.11be (EHT160) / CH47 (Low Edge)

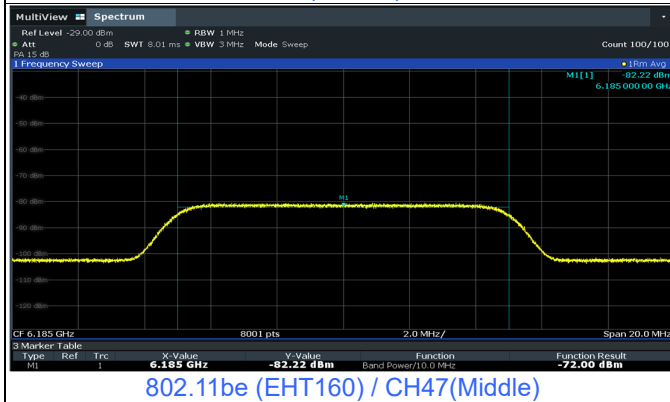


802.11be (EHT160) / CH47 (Middle)

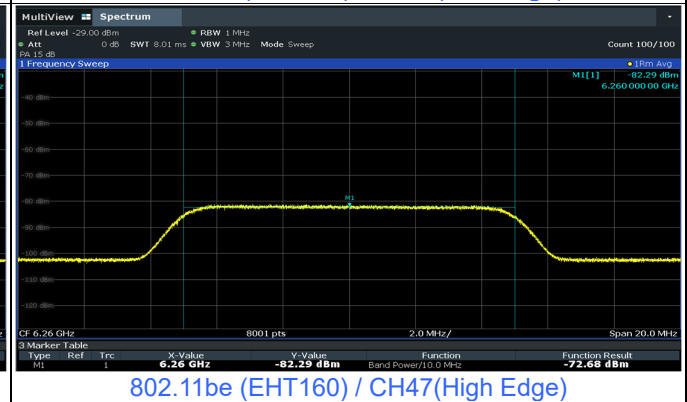


802.11be (EHT160) / CH47 (High Edge)

Plots of EUT ceased transmission in the time domain

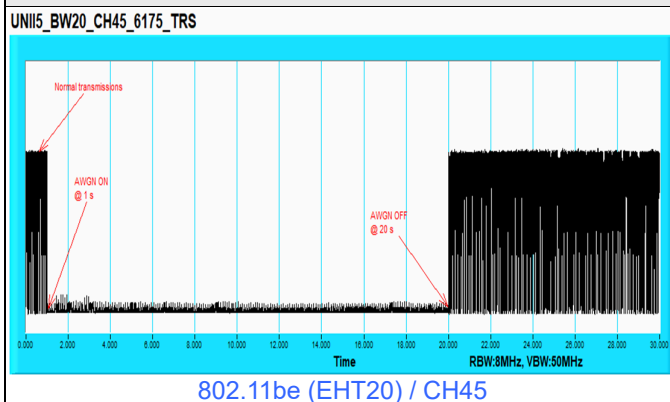


802.11be (EHT20) / CH45

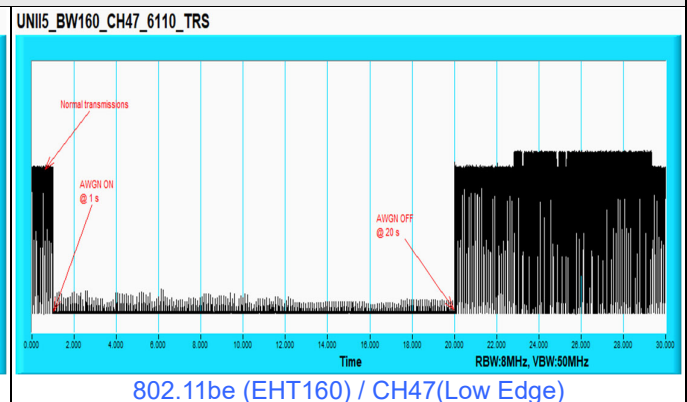

802.11be (EHT160) / CH47 (Low Edge)


Plots of EUT ceased transmission in the time domain

UNI5_BW160_CH47_6185_TRS

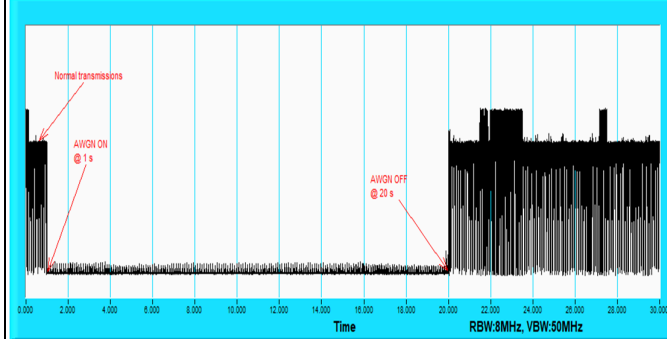

802.11be (EHT160) / CH47(Middle)

UNI5_BW160_CH47_6260_TRS

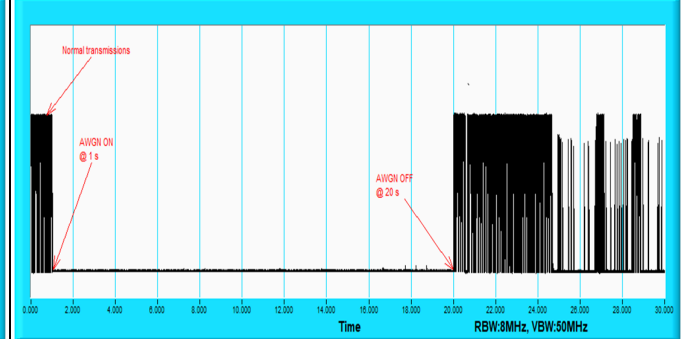

802.11be (EHT160) / CH47(High Edge)

For U-NII-6



Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	105	6475	6475	-82.15	-20	0	-62.15	-62	OFF
					-82.65	-20	0	-62.65	-62	Minimal
					-102	-20	0	-82	-62	ON
	160	111	6505	6430	-82.16	-20	0	-62.16	-62	OFF
					-82.66	-20	0	-62.66	-62	Minimal
					-102	-20	0	-82	-62	ON
				6505	-82.17	-20	0	-62.17	-62	OFF
					-82.67	-20	0	-62.67	-62	Minimal
					-102	-20	0	-82	-62	ON
				6580	-82.2	-20	0	-62.2	-62	OFF
					-82.7	-20	0	-62.7	-62	Minimal
					-102	-20	0	-82	-62	ON

Notes:





1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6475	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
	160	6430	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6505	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass



Plots of EUT Tx waveform

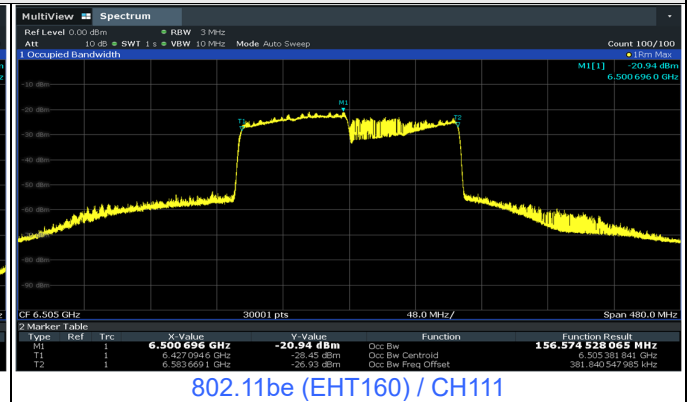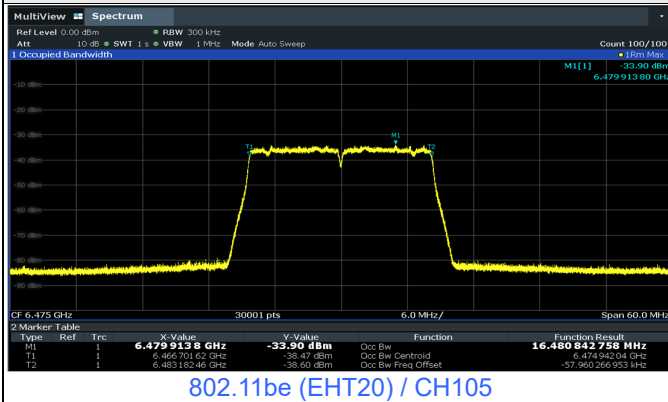

Plots of Injected signal (AWGN) level

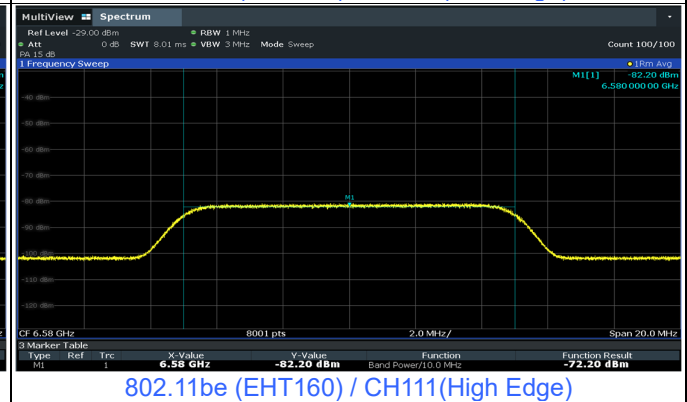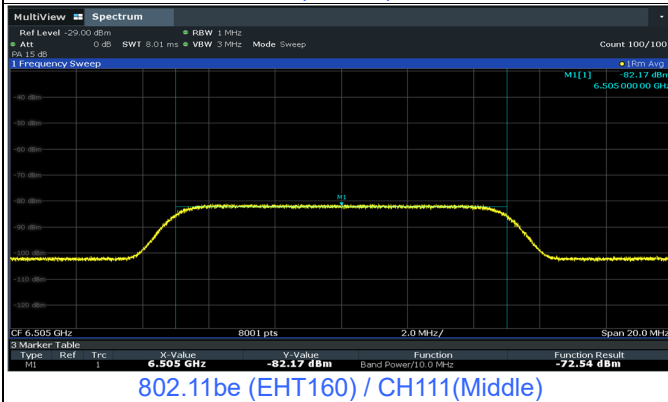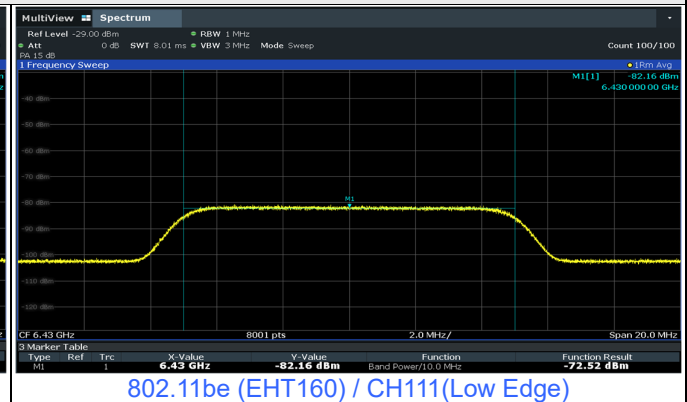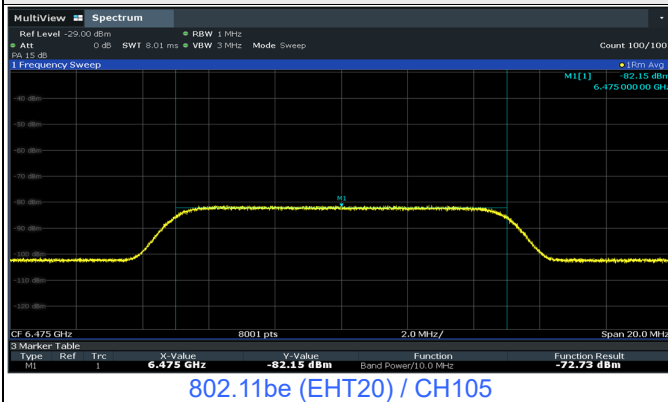


Plots of EUT ceased transmission in the time domain

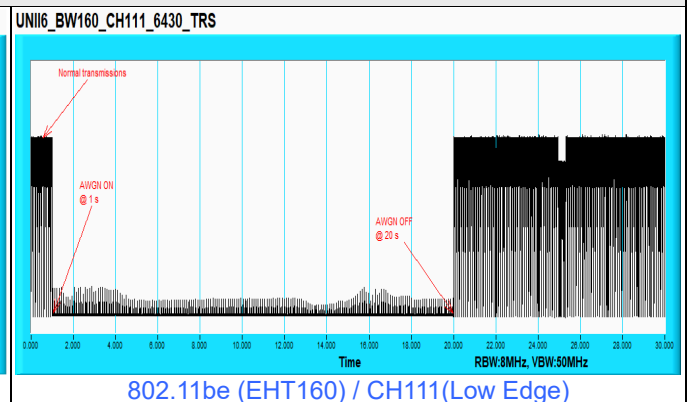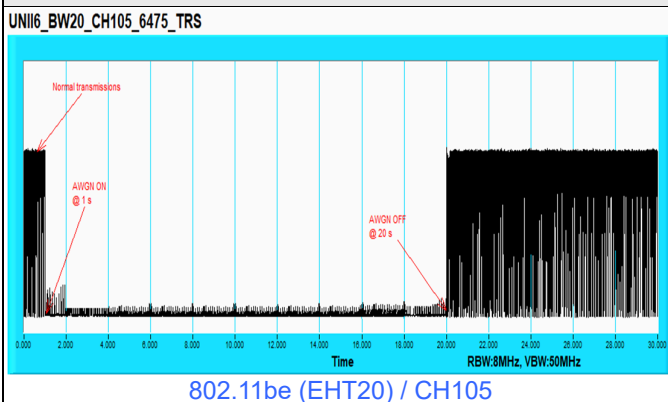


Plots of EUT ceased transmission in the time domain

UNI06_BW160_CH111_6505_TRS

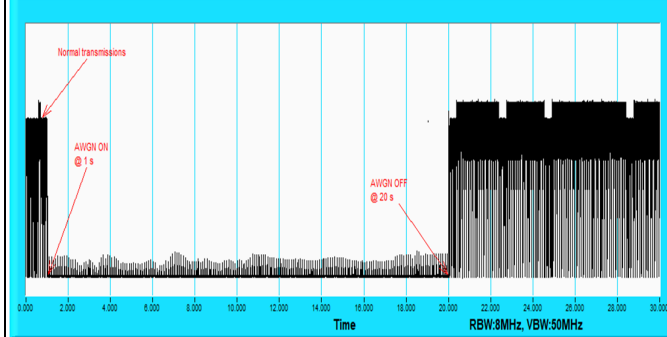

802.11be (EHT160) / CH111(Middle)

UNI06_BW160_CH111_6580_TRS

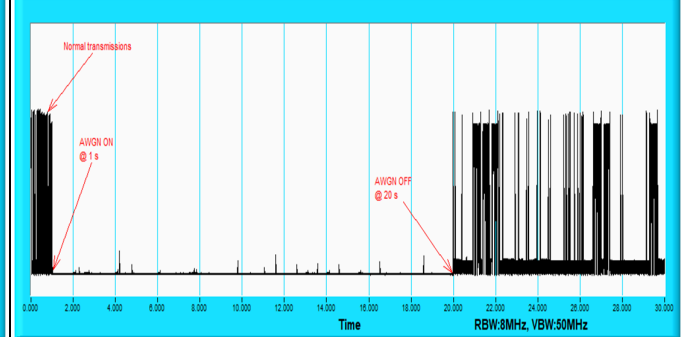

802.11be (EHT160) / CH111(High Edge)

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-82.3	-20	0	-62.3	-62	OFF
					-82.8	-20	0	-62.8	-62	Minimal
					-102	-20	0	-82	-62	ON
	160	143	6665	6590	-82.22	-20	0	-62.22	-62	OFF
					-82.72	-20	0	-62.72	-62	Minimal
					-102	-20	0	-82	-62	ON
				6665	-82.13	-20	0	-62.13	-62	OFF
					-82.63	-20	0	-62.63	-62	Minimal
					-102	-20	0	-82	-62	ON
				6740	-82.23	-20	0	-62.23	-62	OFF
					-82.73	-20	0	-62.73	-62	Minimal
					-102	-20	0	-82	-62	ON

Notes:





1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6665	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass



Plots of EUT Tx waveform

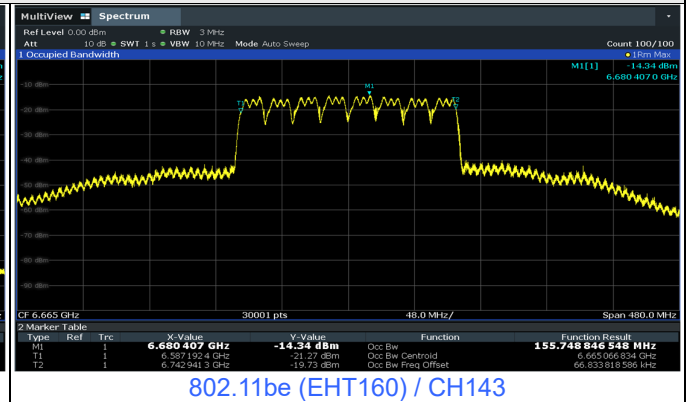

Plots of Injected signal (AWGN) level

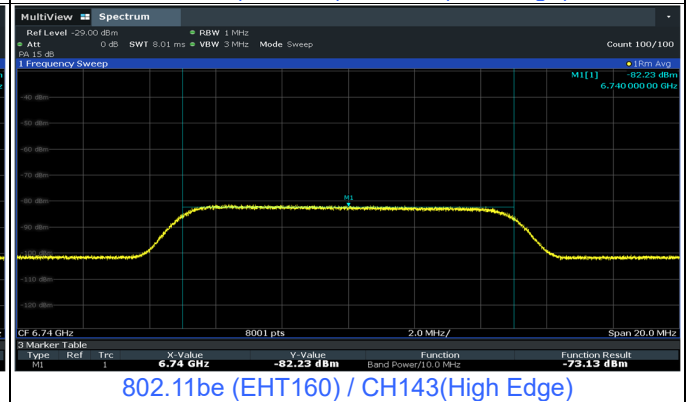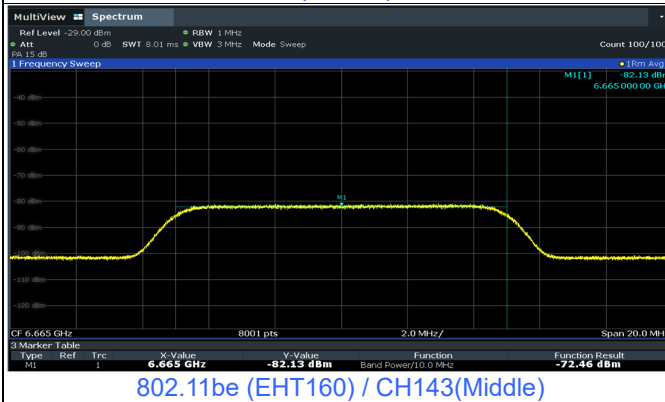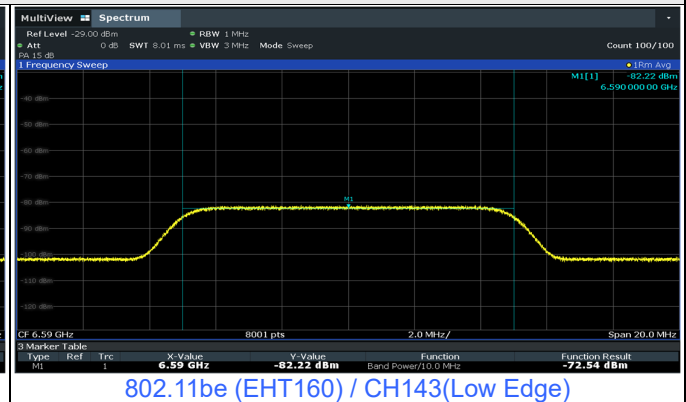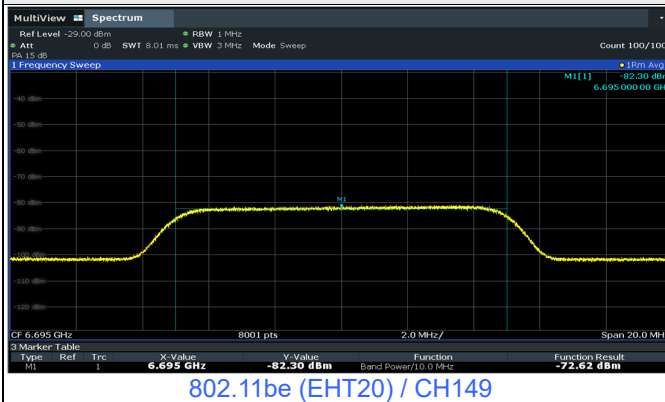


Plots of EUT ceased transmission in the time domain

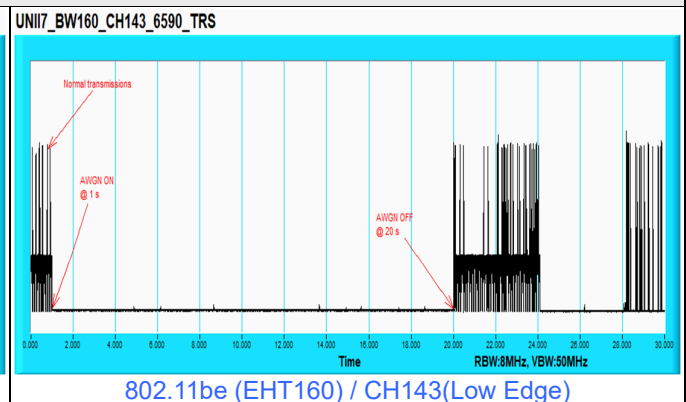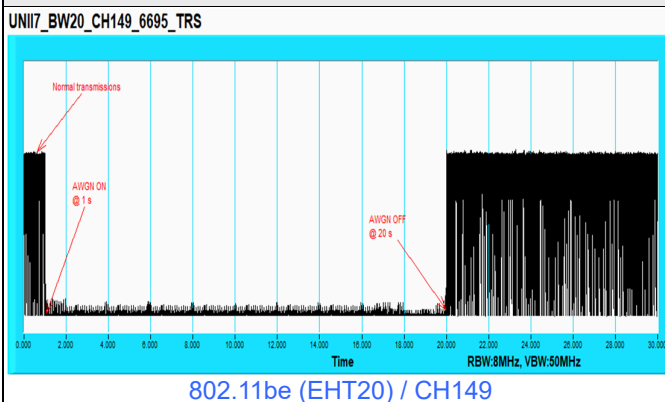


Plots of EUT ceased transmission in the time domain

UNI7_BW160_CH143_6665_TRS

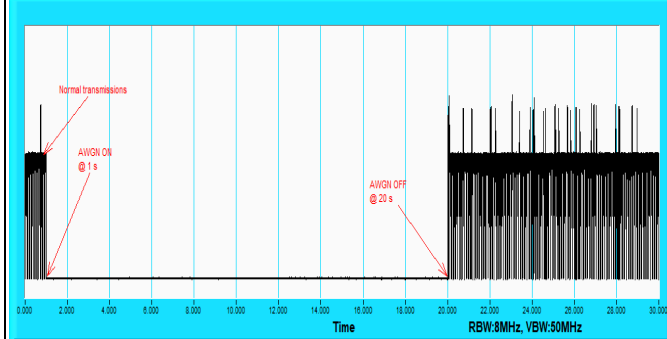

802.11be (EHT160) / CH143(Middle)

UNI7_BW160_CH143_6740_TRS

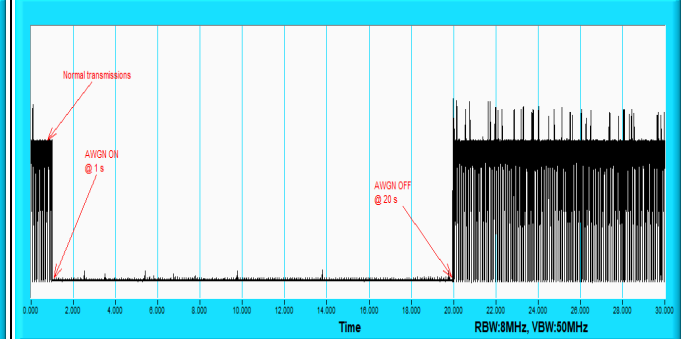

802.11be (EHT160) / CH143(High Edge)

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-82.14	-20	0	-62.14	-62	OFF
					-82.64	-20	0	-62.64	-62	Minimal
					-102	-20	0	-82	-62	ON
	160	207	6985	6910	-82.22	-20	0	-62.22	-62	OFF
					-82.72	-20	0	-62.72	-62	Minimal
					-102	-20	0	-82	-62	ON
				6985	-82.13	-20	0	-62.13	-62	OFF
					-82.63	-20	0	-62.63	-62	Minimal
					-102	-20	0	-82	-62	ON
				7060	-82.12	-20	0	-62.12	-62	OFF
					-82.62	-20	0	-62.62	-62	Minimal
					-102	-20	0	-82	-62	ON

Notes:





1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6910	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6985	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass



Plots of EUT Tx waveform

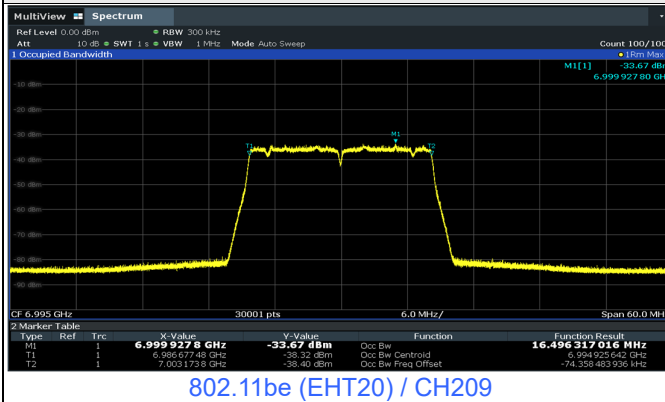

Plots of Injected signal (AWGN) level

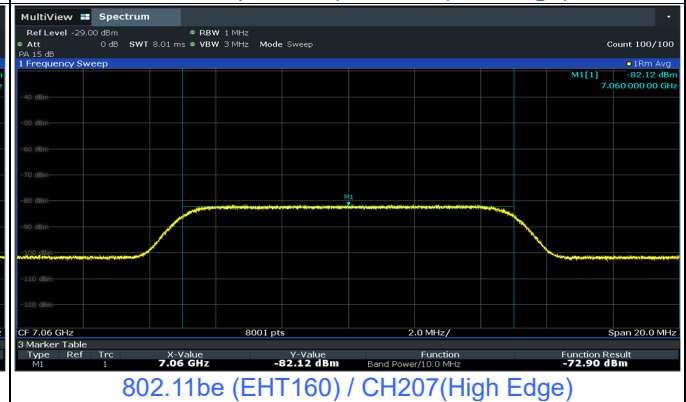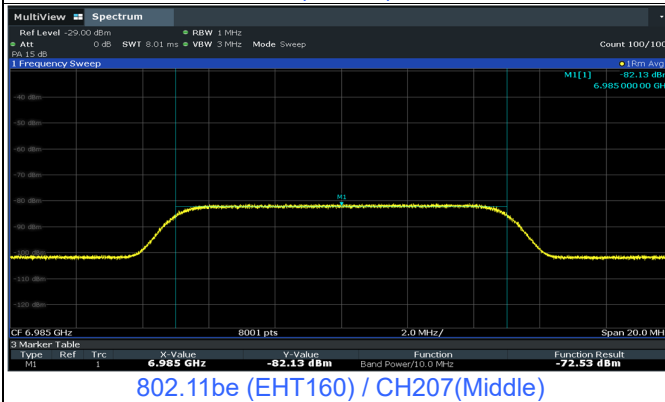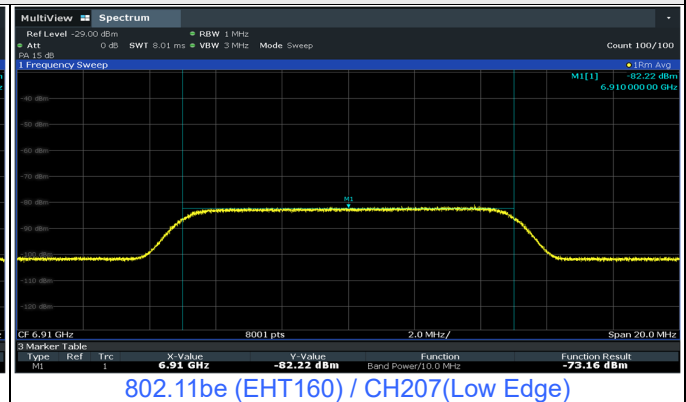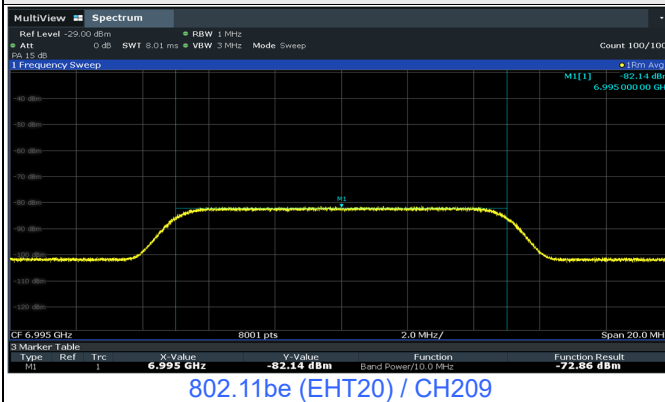


Plots of EUT ceased transmission in the time domain

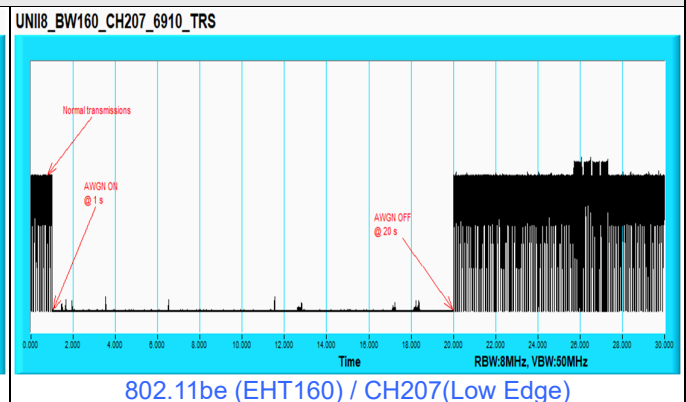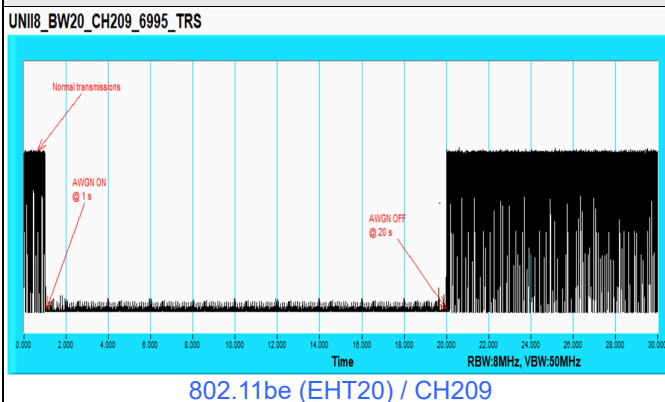


Plots of EUT ceased transmission in the time domain

UNI8_BW160_CH207_6985_TRS

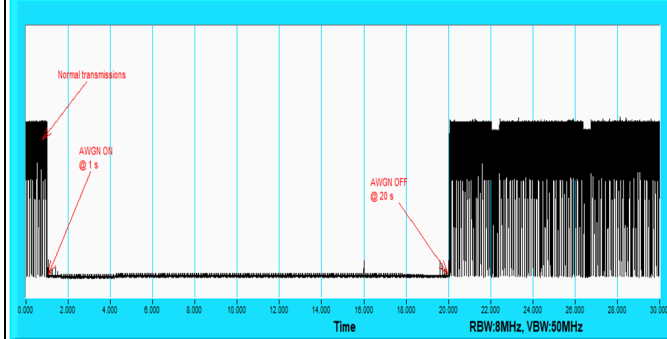

802.11be (EHT160) / CH207(Middle)

UNI8_BW160_CH207_7060_TRS

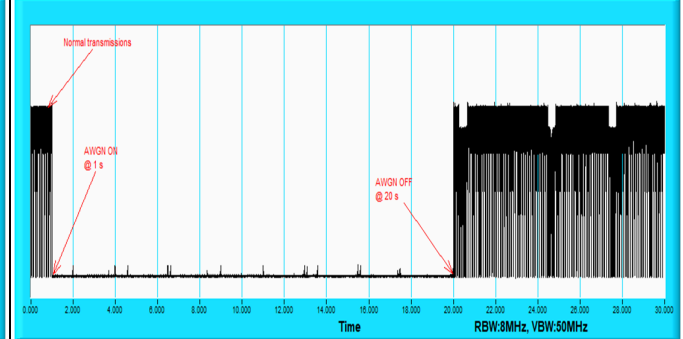

802.11be (EHT160) / CH207(High Edge)

7.7 AC Power Conducted Emissions

Mode C


2Tx

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29 °C, 50% RH
Tested By	Roy Mai		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15390	9.97	24.56	6.16	34.53	16.13	65.79	55.79	-31.26	-39.66
2	0.18905	9.97	33.42	17.05	43.39	27.02	64.08	54.08	-20.69	-27.06
3	0.49768	10.01	21.51	6.26	31.52	16.27	56.04	46.04	-24.52	-29.77
4	0.58751	10.02	18.05	13.30	28.07	23.32	56.00	46.00	-27.93	-22.68
5	11.46485	10.74	21.74	16.11	32.48	26.85	60.00	50.00	-27.52	-23.15
6	17.56640	11.13	27.76	23.74	38.89	34.87	60.00	50.00	-21.11	-15.13

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

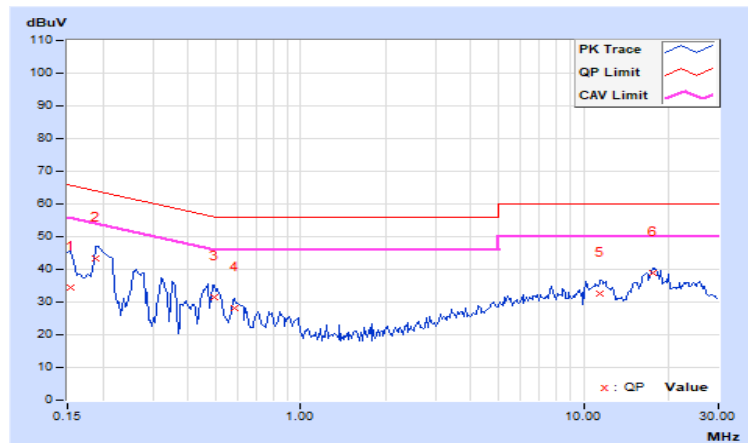


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29 °C, 50% RH
Tested By	Roy Mai		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.99	29.12	12.11	39.11	22.10	66.00	56.00	-26.89	-33.90
2	0.18905	9.98	33.26	17.21	43.24	27.19	64.08	54.08	-20.84	-26.89
3	0.46640	9.95	23.74	14.10	33.69	24.05	56.58	46.58	-22.89	-22.53
4	0.50546	9.95	20.69	11.23	30.64	21.18	56.00	46.00	-25.36	-24.82
5	0.57971	9.96	20.13	14.49	30.09	24.45	56.00	46.00	-25.91	-21.55
6	16.83201	10.81	25.21	19.58	36.02	30.39	60.00	50.00	-23.98	-19.61

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

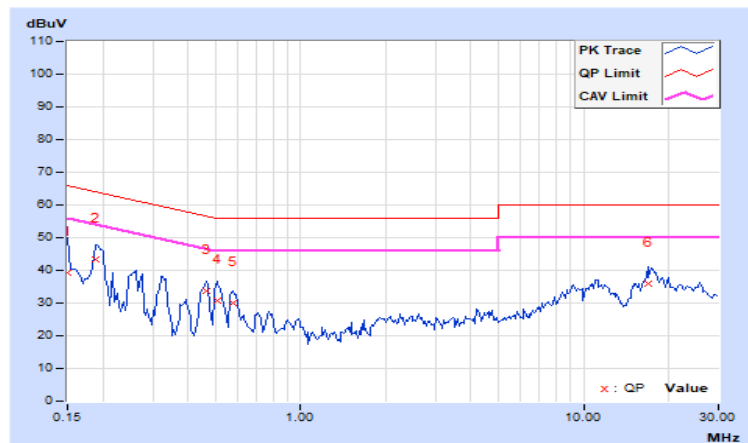

7.8 Unwanted Emissions below 1 GHz

Mode A


1Tx

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	52.92	28 PK	40	-12	-76.88	9.62	-67.26
2	127.73	29.24 PK	43.5	-14.26	-75.64	9.62	-66.02
3	281.23	28.48 PK	46	-17.52	-76.4	9.62	-66.78
4	454.25	29.67 PK	46	-16.33	-75.21	9.62	-65.59
5	768.29	29.48 PK	46	-16.52	-75.4	9.62	-65.78
6	807.09	30.81 PK	46	-15.19	-74.07	9.62	-64.45

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

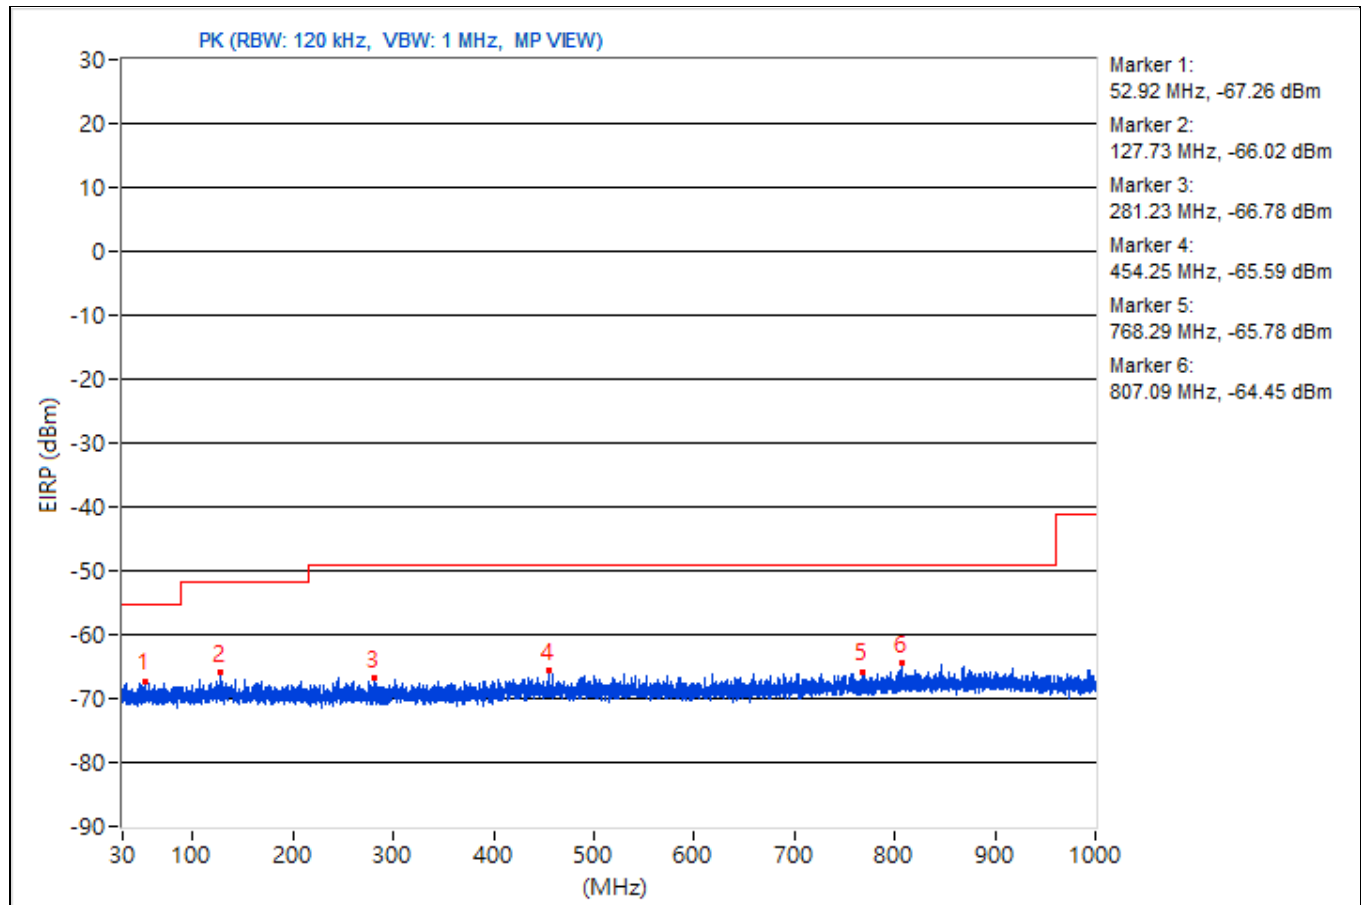


2Tx

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	30 MHz ~ 1 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	83.71	29.75 PK	40	-10.25	-79.51	-77.1	9.62	-65.51
2	113.3	30.35 PK	43.5	-13.15	-79.05	-76.42	9.62	-64.91
3	360.77	30.5 PK	46	-15.5	-79.05	-76.2	9.62	-64.76
4	566.29	31.41 PK	46	-14.59	-75.46	-77.82	9.62	-63.85
5	747.32	32.59 PK	46	-13.41	-74.51	-76.28	9.62	-62.67
6	894.39	32.75 PK	46	-13.25	-74.51	-75.89	9.62	-62.51

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

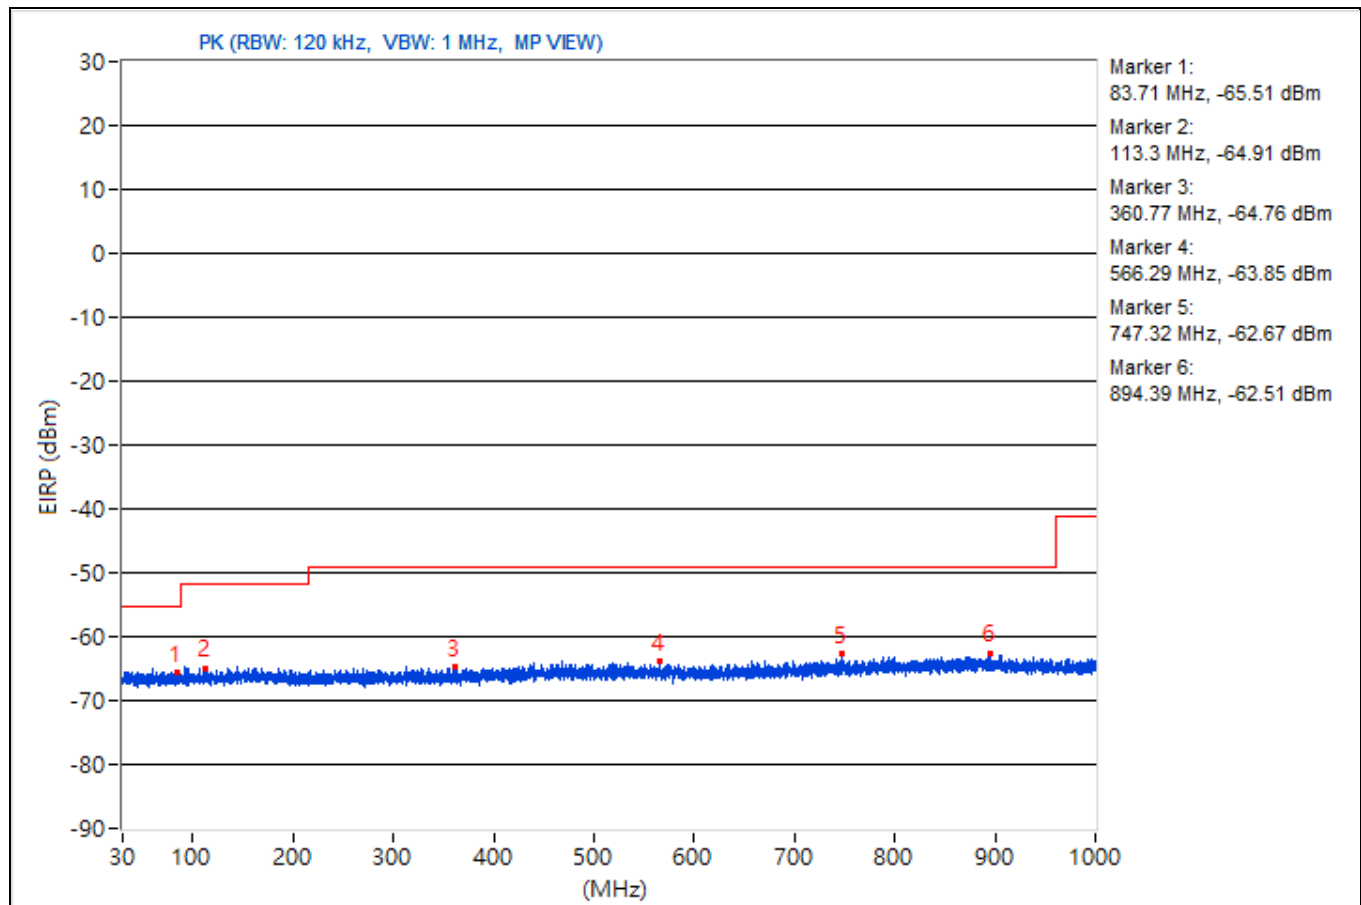

Mode B


1Tx

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.28	23.4 QP	40.0	-16.6	1.00 H	115	41.5	-18.1
2	199.16	38.4 QP	43.5	-5.1	1.00 H	245	59.4	-21.0
3	498.89	38.4 QP	46.0	-7.6	1.50 H	119	51.1	-12.7
4	554.02	33.3 QP	46.0	-12.7	1.00 H	330	44.9	-11.6
5	657.94	34.4 QP	46.0	-11.6	1.00 H	233	43.8	-9.4
6	973.51	24.9 QP	54.0	-29.1	2.50 H	342	30.1	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

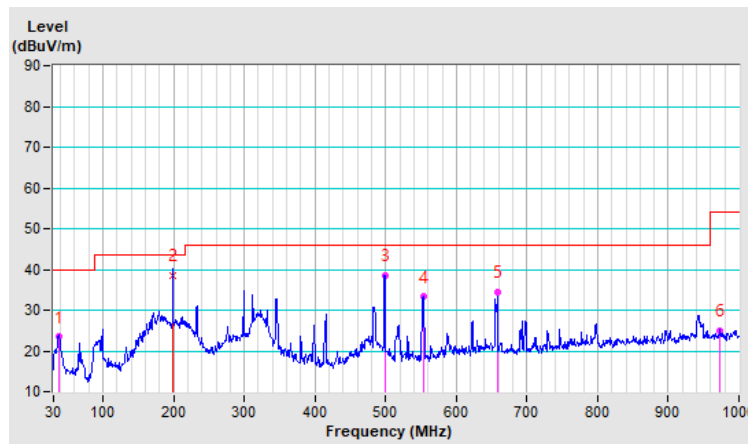


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.42	28.2 QP	40.0	-11.8	1.00 V	265	47.1	-18.9
2	199.21	28.3 QP	43.5	-15.2	1.50 V	272	49.3	-21.0
3	346.29	35.8 QP	46.0	-10.2	1.00 V	312	52.1	-16.3
4	379.51	34.0 QP	46.0	-12.0	1.50 V	236	49.2	-15.2
5	415.54	34.3 QP	46.0	-11.7	1.00 V	226	48.6	-14.3
6	497.85	34.2 QP	46.0	-11.8	1.50 V	265	46.9	-12.7
7	551.89	33.2 QP	46.0	-12.8	1.00 V	342	44.8	-11.6
8	658.00	33.8 QP	46.0	-12.2	1.55 V	241	43.2	-9.4
9	992.10	25.2 QP	54.0	-28.8	2.00 V	264	30.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

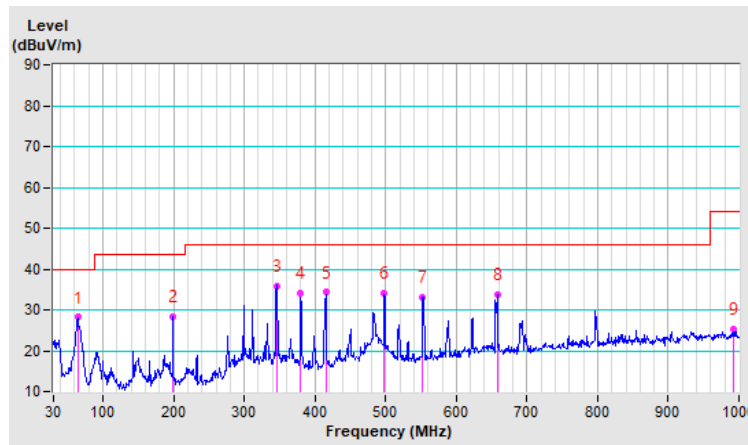


2Tx

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.90	14.2 QP	40.0	-25.8	2.50 H	165	32.1	-17.9
2	199.20	33.4 QP	43.5	-10.1	1.50 H	245	54.4	-21.0
3	298.82	30.2 QP	46.0	-15.8	2.00 H	143	47.4	-17.2
4	346.26	31.6 QP	46.0	-14.4	1.50 H	294	47.9	-16.3
5	413.98	29.4 QP	46.0	-16.6	1.50 H	334	43.8	-14.4
6	498.90	37.2 QP	46.0	-8.8	2.00 H	242	49.9	-12.7
7	554.10	29.2 QP	46.0	-16.8	1.50 H	265	40.8	-11.6
8	655.38	28.6 QP	46.0	-17.4	2.00 H	306	38.0	-9.4
9	959.66	25.3 QP	46.0	-20.7	2.00 H	312	30.5	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

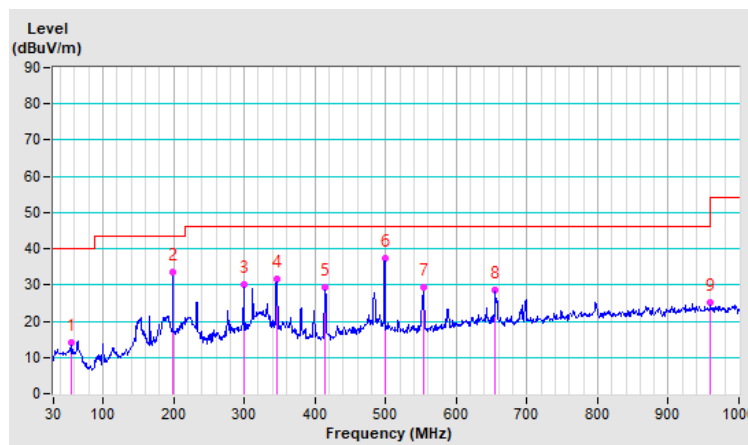


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.90	33.6 QP	40.0	-6.4	1.00 V	264	51.7	-18.1
2	88.20	29.3 QP	43.5	-14.2	1.00 V	224	52.9	-23.6
3	199.20	33.4 QP	43.5	-10.1	1.50 V	311	54.4	-21.0
4	415.49	30.4 QP	46.0	-15.6	1.00 V	245	44.8	-14.4
5	498.91	32.8 QP	46.0	-13.2	1.50 V	300	45.5	-12.7
6	554.05	32.5 QP	46.0	-13.5	1.00 V	260	44.1	-11.6
7	948.76	29.5 QP	46.0	-16.5	3.00 V	312	34.9	-5.4
8	990.50	24.5 QP	54.0	-29.5	1.00 V	303	29.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

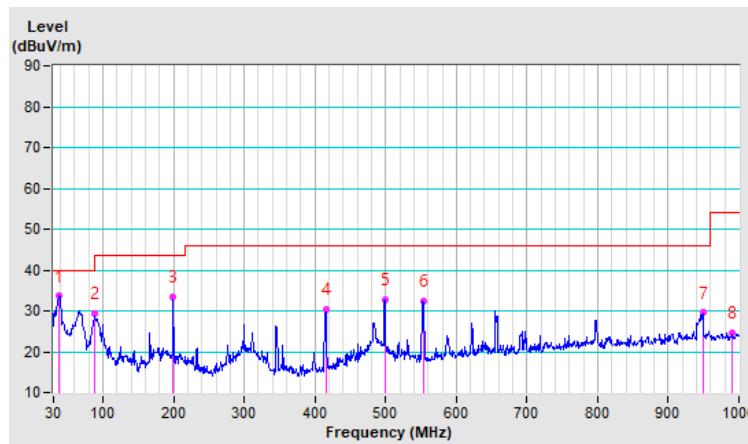

7.9 Unwanted Emissions above 1 GHz

Mode A



1Tx

Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.27	45.47 PK	74	-28.53	-54.71	4.92	-49.79
2	3768.27	35.43 AV	54	-18.57	-64.75	4.92	-59.83
3	15358.93	46.1 PK	74	-27.9	-54.08	4.92	-49.16
4	15358.93	35.38 AV	54	-18.62	-64.8	4.92	-59.88
5	19089.1	47.99 PK	74	-26.01	-52.19	4.92	-47.27
6	19089.1	36.31 AV	54	-17.69	-63.87	4.92	-58.95
7	22460.5	45.32 PK	74	-28.68	-54.86	4.92	-49.94
8	22460.5	37.24 AV	54	-16.76	-62.94	4.92	-58.02
9	38647.73	44.23 PK	74	-29.77	-55.95	4.92	-51.03
10	38647.73	32.16 AV	54	-21.84	-68.02	4.92	-63.1


Note: Margin value = Emission Level - Limit value

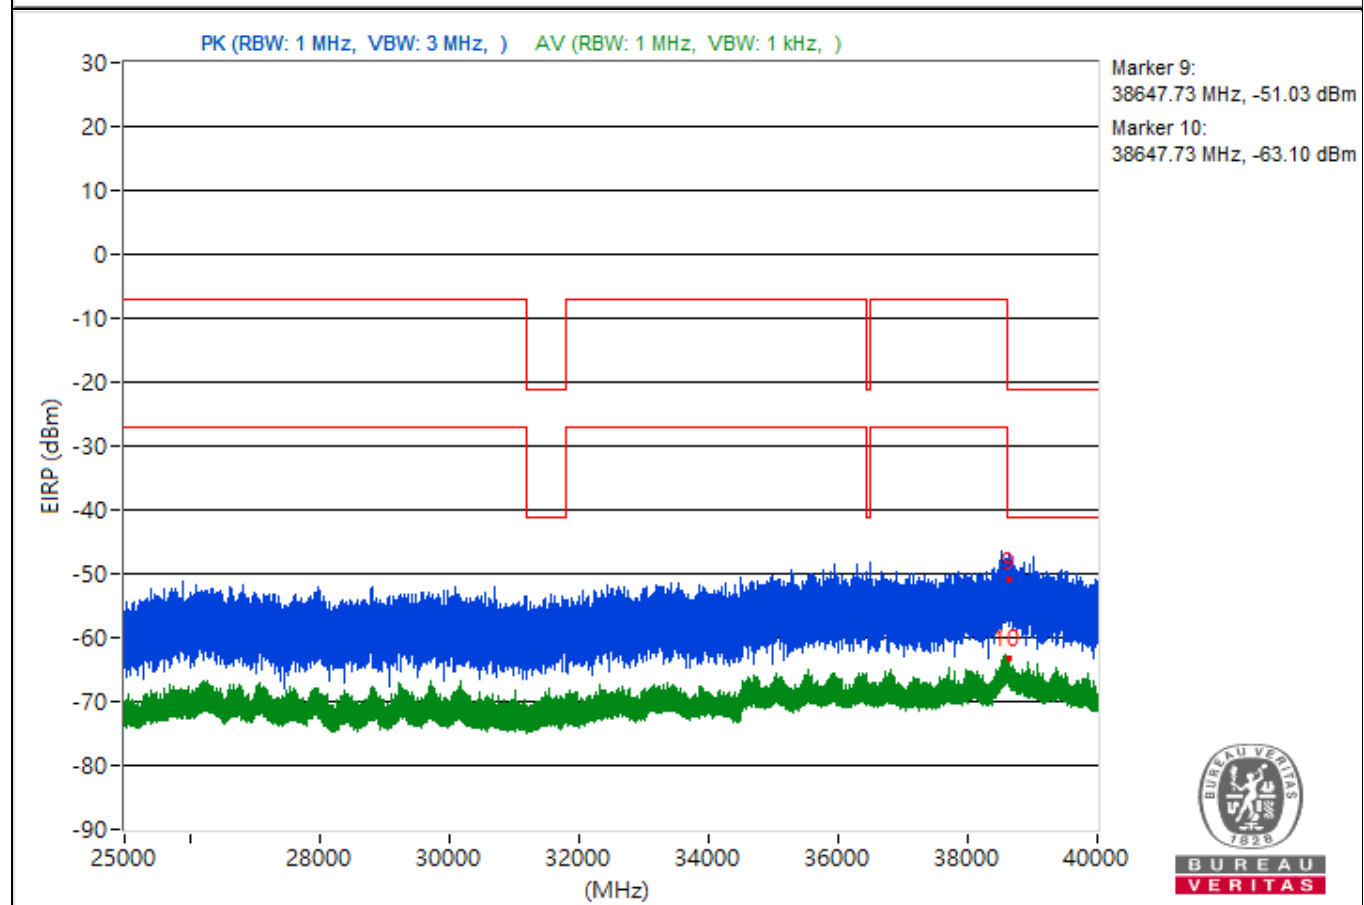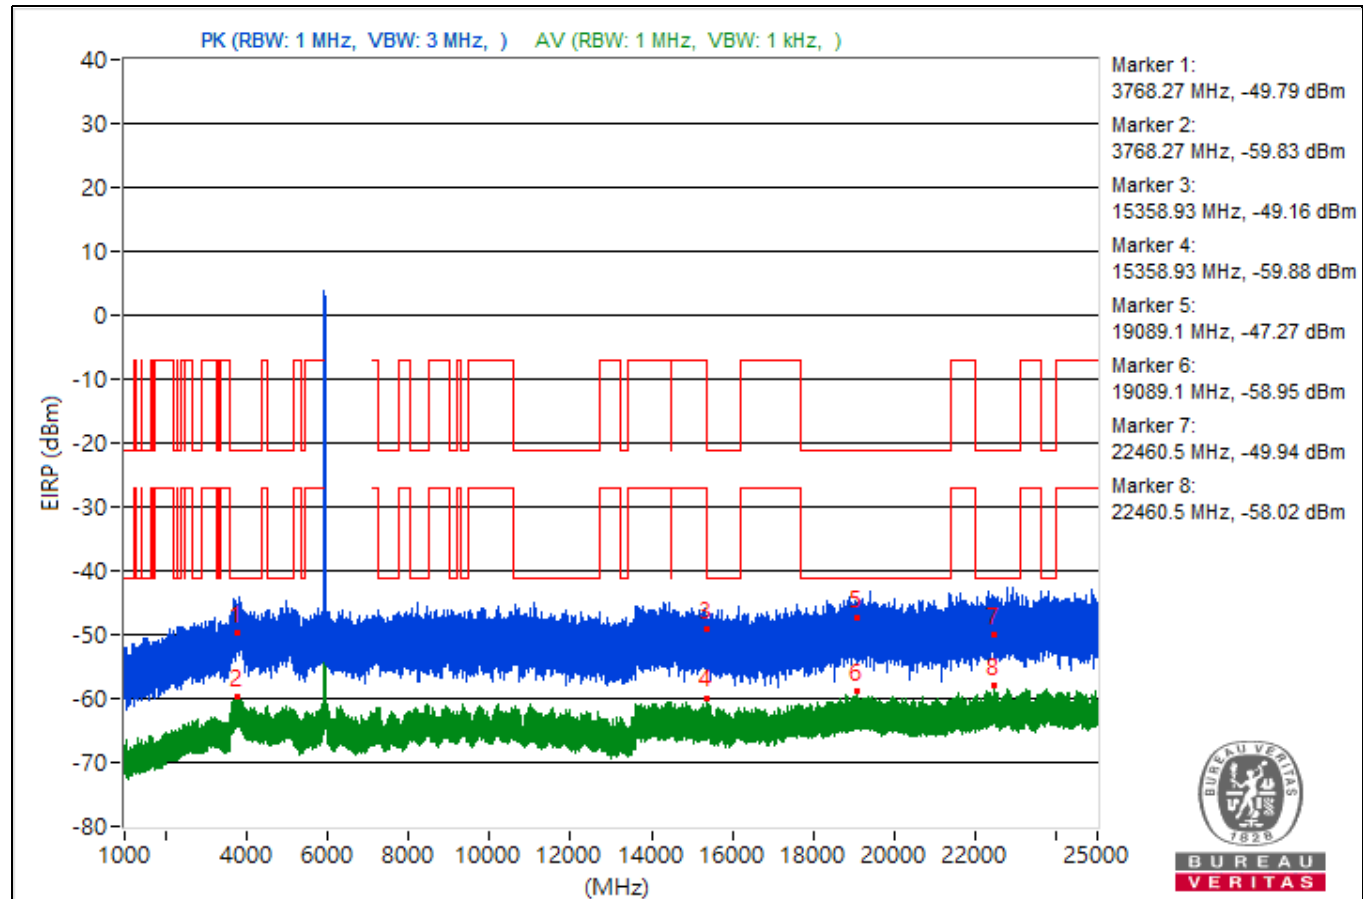


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.67	44.71 PK	74	-29.29	-55.47	4.92	-50.55
2	3790.67	35.32 AV	54	-18.68	-64.86	4.92	-59.94
3	9368.18	43.44 PK	74	-30.56	-56.74	4.92	-51.82
4	9368.18	34.38 AV	54	-19.62	-65.8	4.92	-60.88
5	19214.7	46.34 PK	74	-27.66	-53.84	4.92	-48.92
6	19214.7	36.51 AV	54	-17.49	-63.67	4.92	-58.75
7	23981.4	46.87 PK	74	-27.13	-53.31	4.92	-48.39
8	23981.4	36.53 AV	54	-17.47	-63.65	4.92	-58.73
9	38608.71	42.53 PK	74	-31.47	-57.65	4.92	-52.73
10	38608.71	33.04 AV	54	-20.96	-67.14	4.92	-62.22

Note: Margin value = Emission Level - Limit value

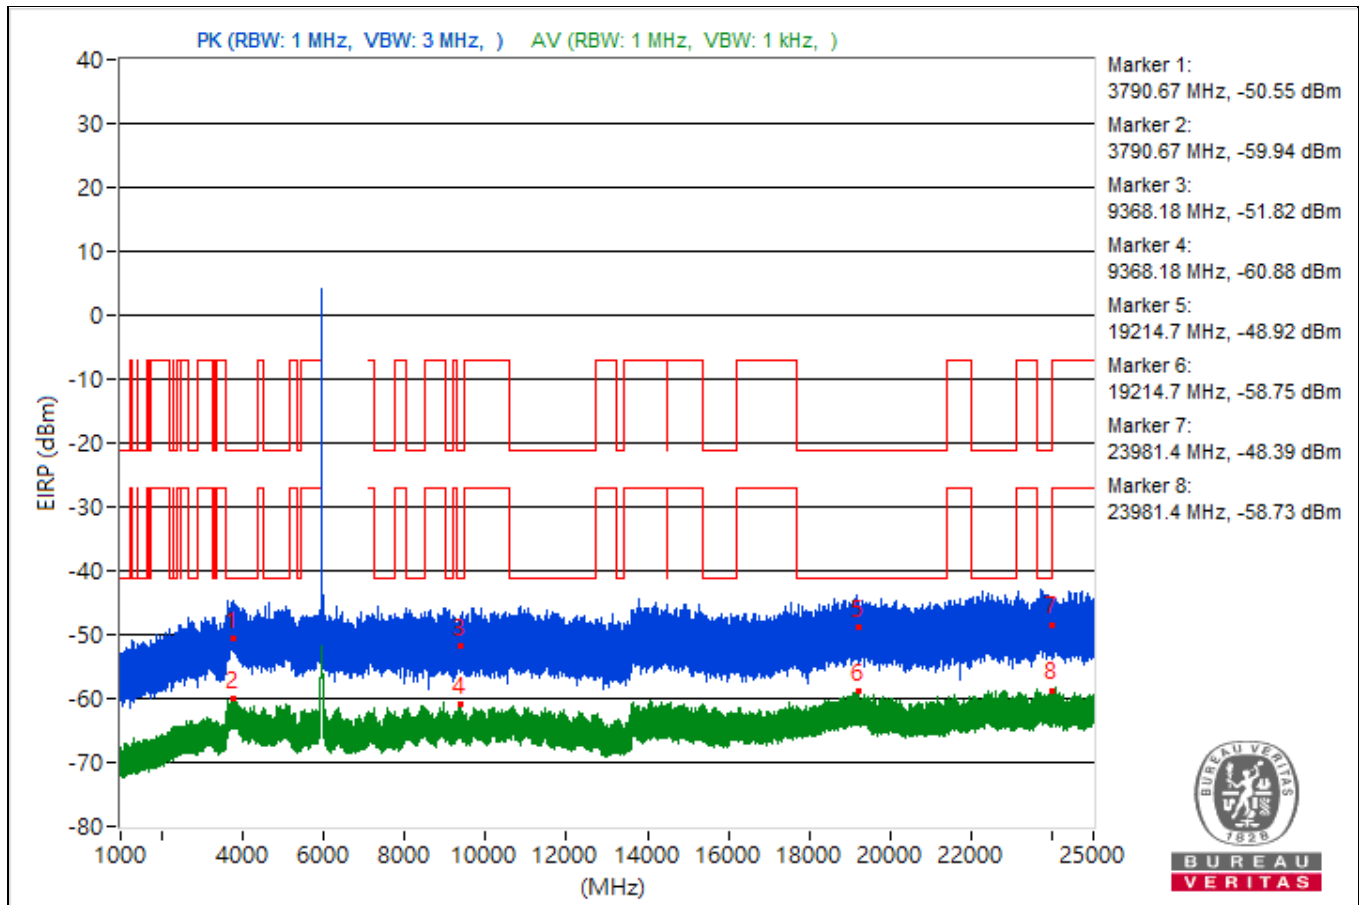


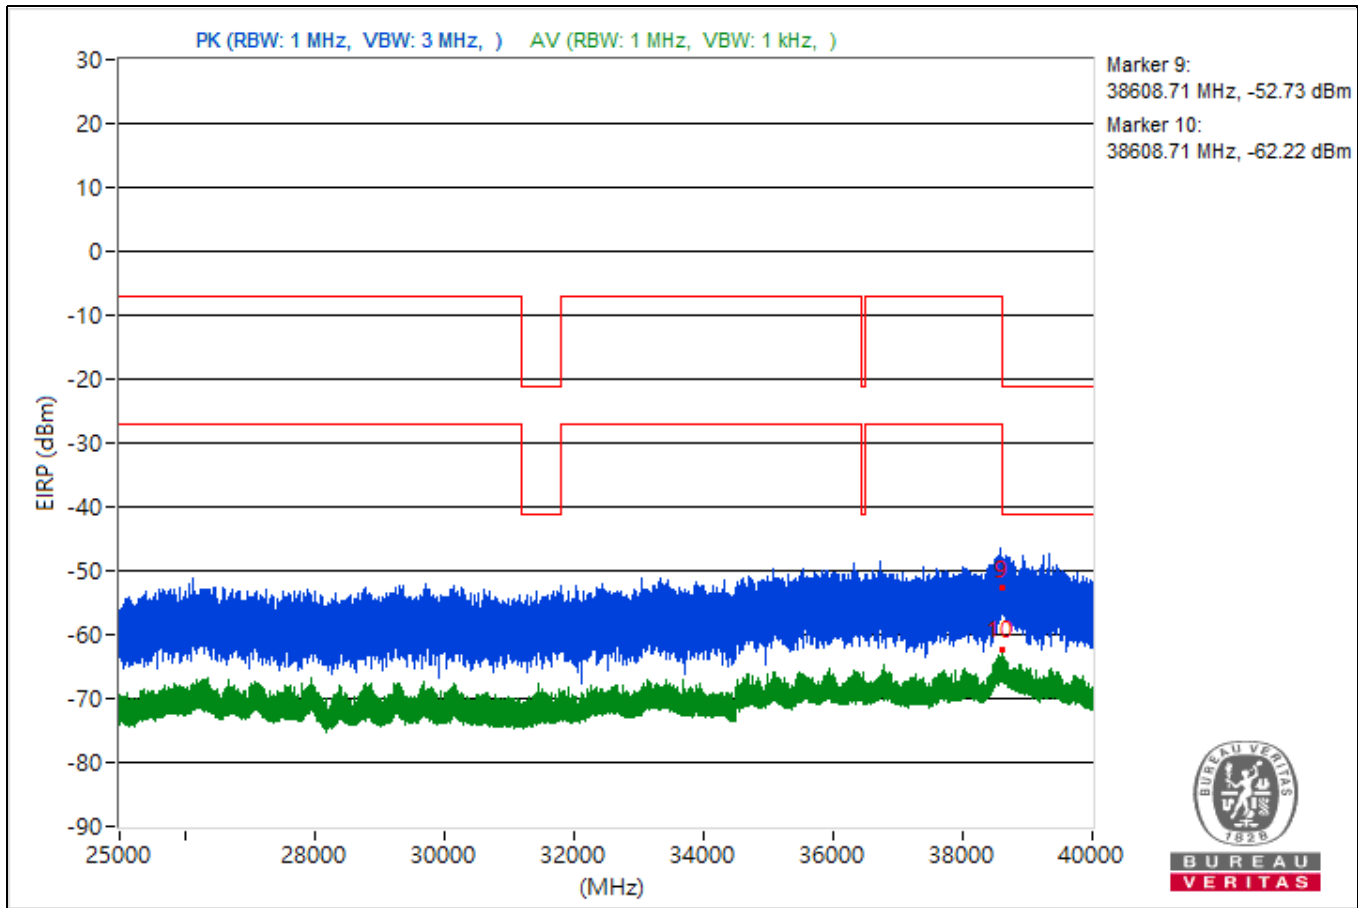


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3755.12	46.23 PK	74	-27.77	-53.95	4.92	-49.03
2	3755.12	35.9 AV	54	-18.1	-64.28	4.92	-59.36
3	7250.22	41.76 PK	74	-32.24	-58.42	4.92	-53.5
4	7250.22	34.32 AV	54	-19.68	-65.86	4.92	-60.94
5	19005.8	47.44 PK	74	-26.56	-52.74	4.92	-47.82
6	19005.8	35.94 AV	54	-18.06	-64.24	4.92	-59.32
7	22222.5	47.28 PK	74	-26.72	-52.9	4.92	-47.98
8	22222.5	36.31 AV	54	-17.69	-63.87	4.92	-58.95
9	38605.16	42.09 PK	74	-31.91	-58.09	4.92	-53.17
10	38605.16	32.55 AV	54	-21.45	-67.63	4.92	-62.71

Note: Margin value = Emission Level - Limit value

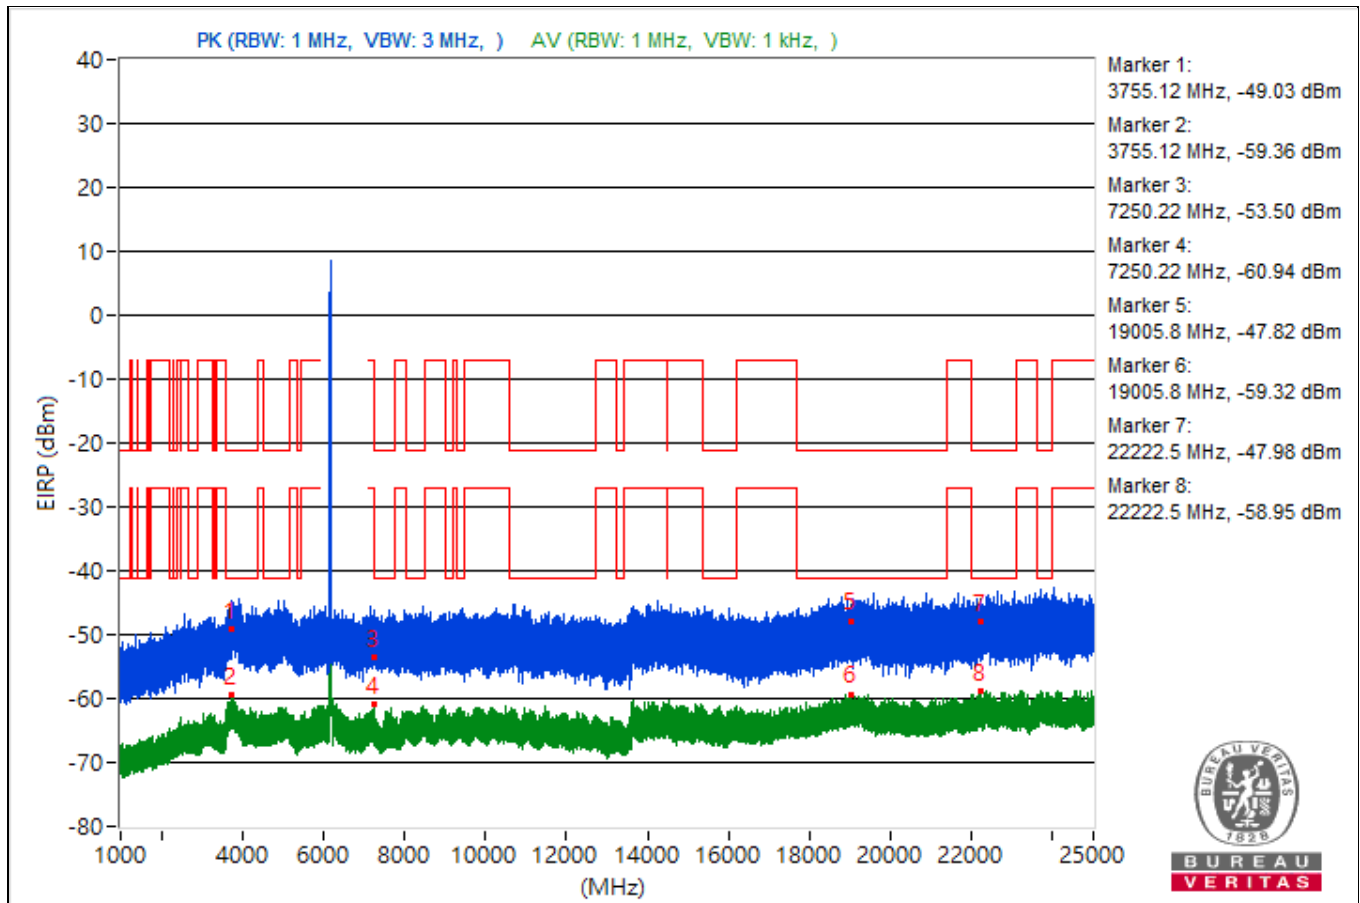


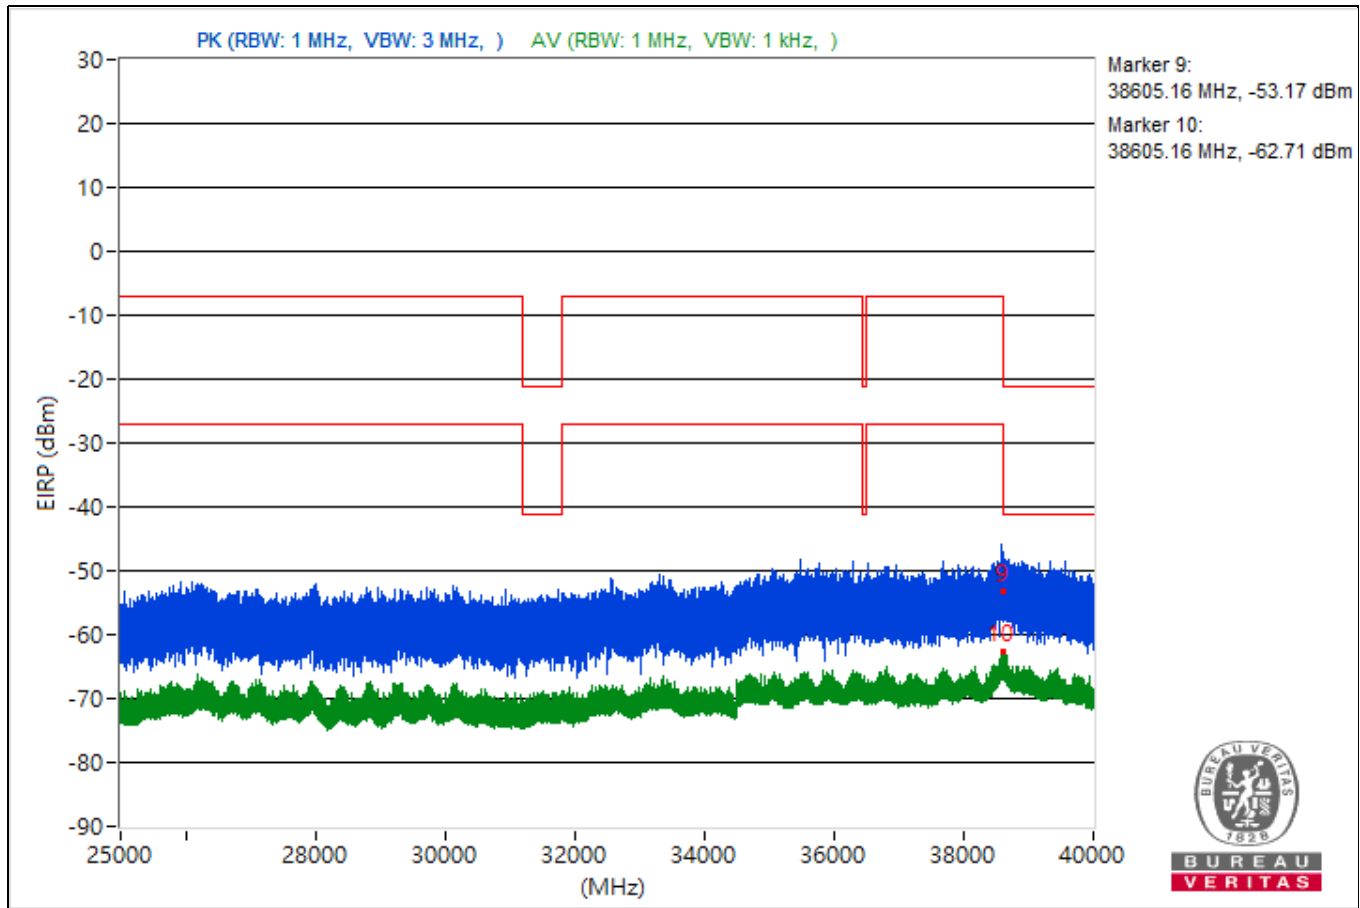


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3767.1	46.24 PK	74	-27.76	-53.94	4.92	-49.02
2	3767.1	35.67 AV	54	-18.33	-64.51	4.92	-59.59
3	9326.49	45.27 PK	74	-28.73	-54.91	4.92	-49.99
4	9326.49	34.35 AV	54	-19.65	-65.83	4.92	-60.91
5	18878.8	44.01 PK	74	-29.99	-56.17	4.92	-51.25
6	18878.8	36.13 AV	54	-17.87	-64.05	4.92	-59.13
7	22812.8	47.08 PK	74	-26.92	-53.1	4.92	-48.18
8	22812.8	36.93 AV	54	-17.07	-63.25	4.92	-58.33
9	38652.36	39.03 PK	74	-34.97	-61.15	4.92	-56.23
10	38652.36	32.27 AV	54	-21.73	-67.91	4.92	-62.99

Note: Margin value = Emission Level - Limit value

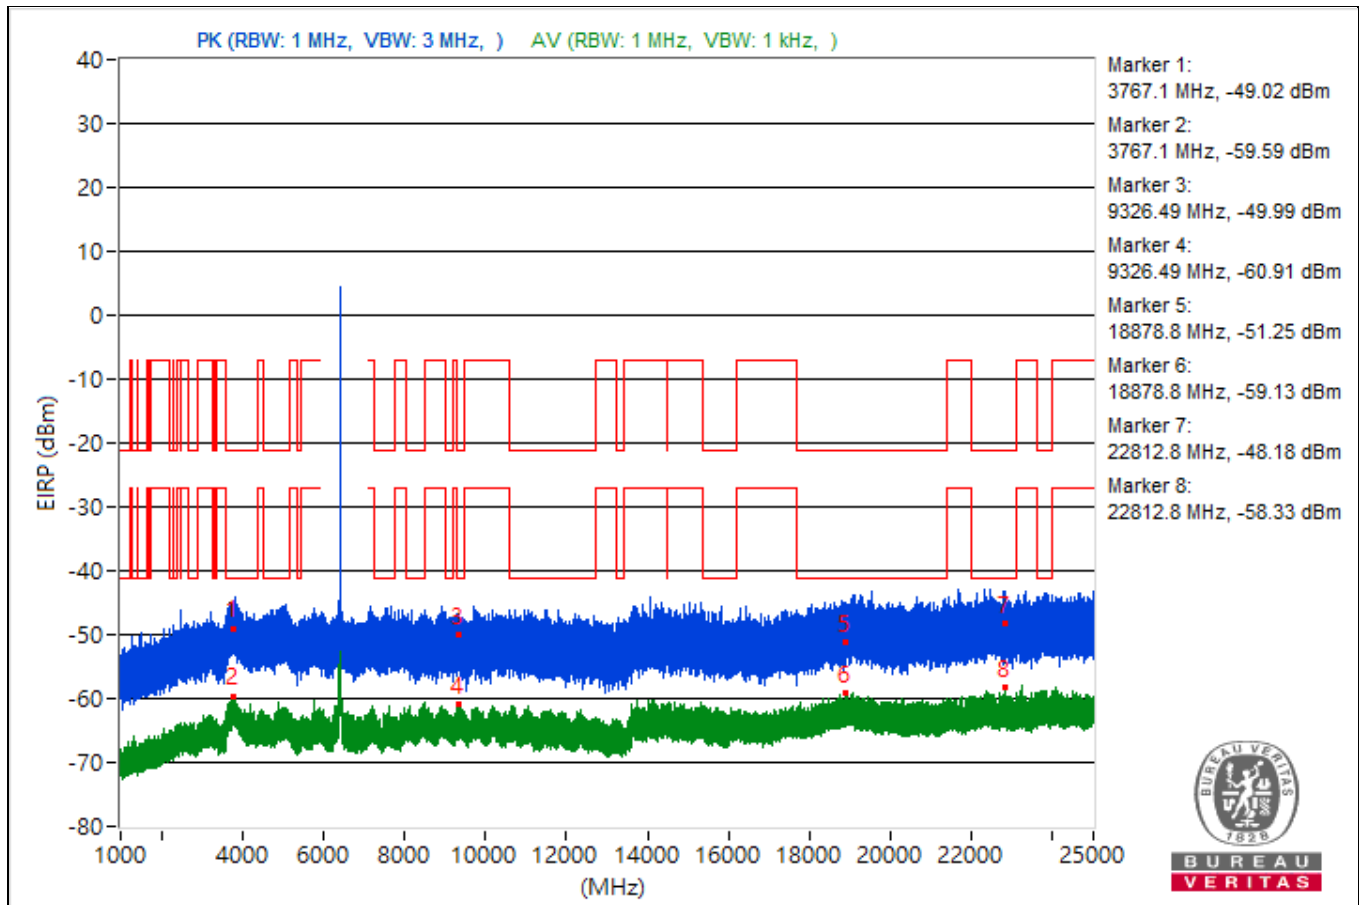


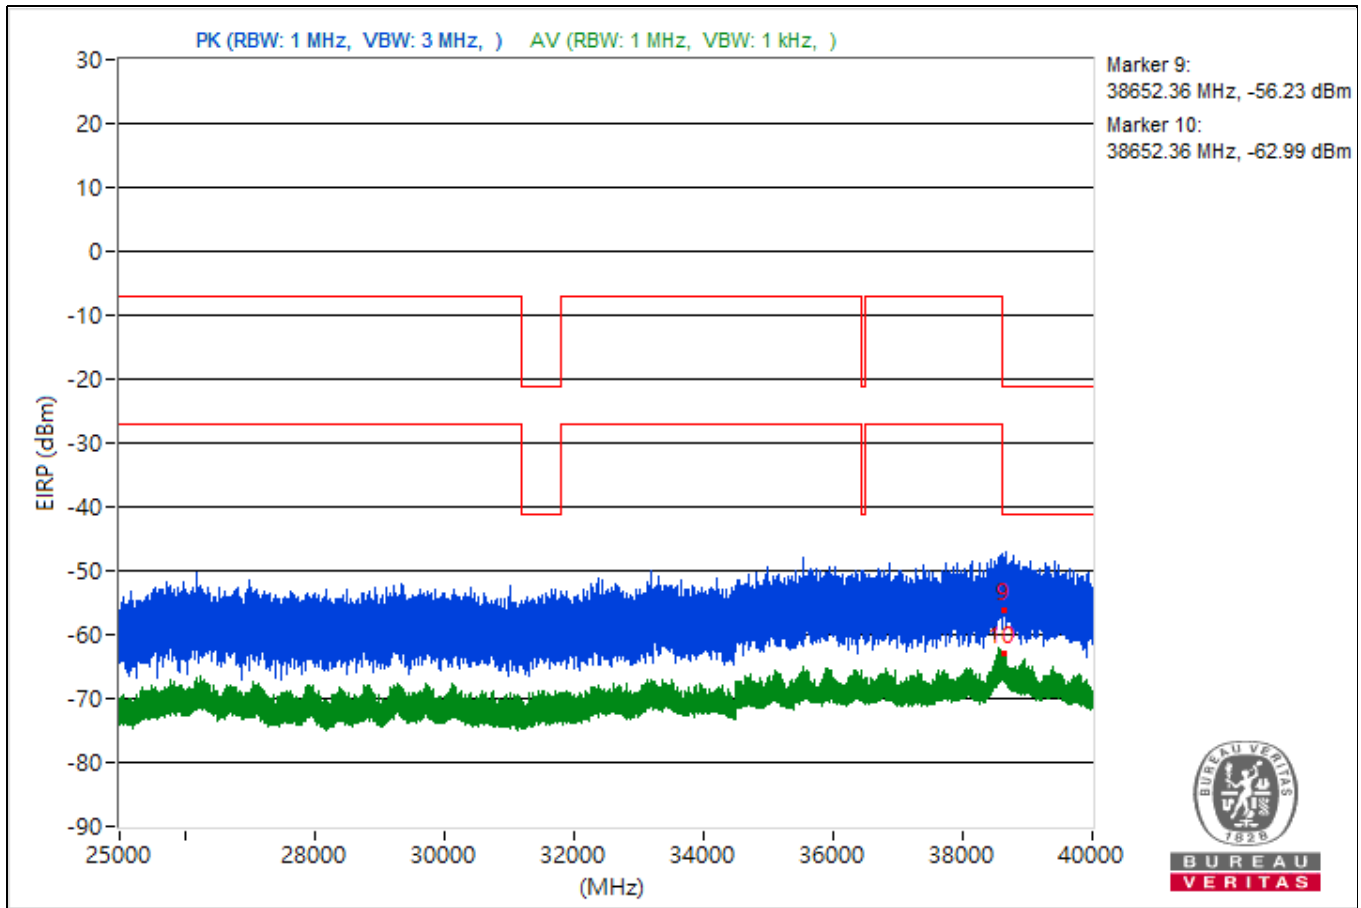


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.39	46.65 PK	74	-27.35	-53.53	4.92	-48.61
2	3807.39	35.12 AV	54	-18.88	-65.06	4.92	-60.14
3	11073.51	42.73 PK	74	-31.27	-57.45	4.92	-52.53
4	11073.51	34.57 AV	54	-19.43	-65.61	4.92	-60.69
5	19188.6	45.86 PK	74	-28.14	-54.32	4.92	-49.4
6	19188.6	37.09 AV	54	-16.91	-63.09	4.92	-58.17
7	22444.3	46.26 PK	74	-27.74	-53.92	4.92	-49
8	22444.3	37.21 AV	54	-16.79	-62.97	4.92	-58.05
9	38620.8	42.81 PK	74	-31.19	-57.37	4.92	-52.45
10	38620.8	33.11 AV	54	-20.89	-67.07	4.92	-62.15

Note: Margin value = Emission Level - Limit value

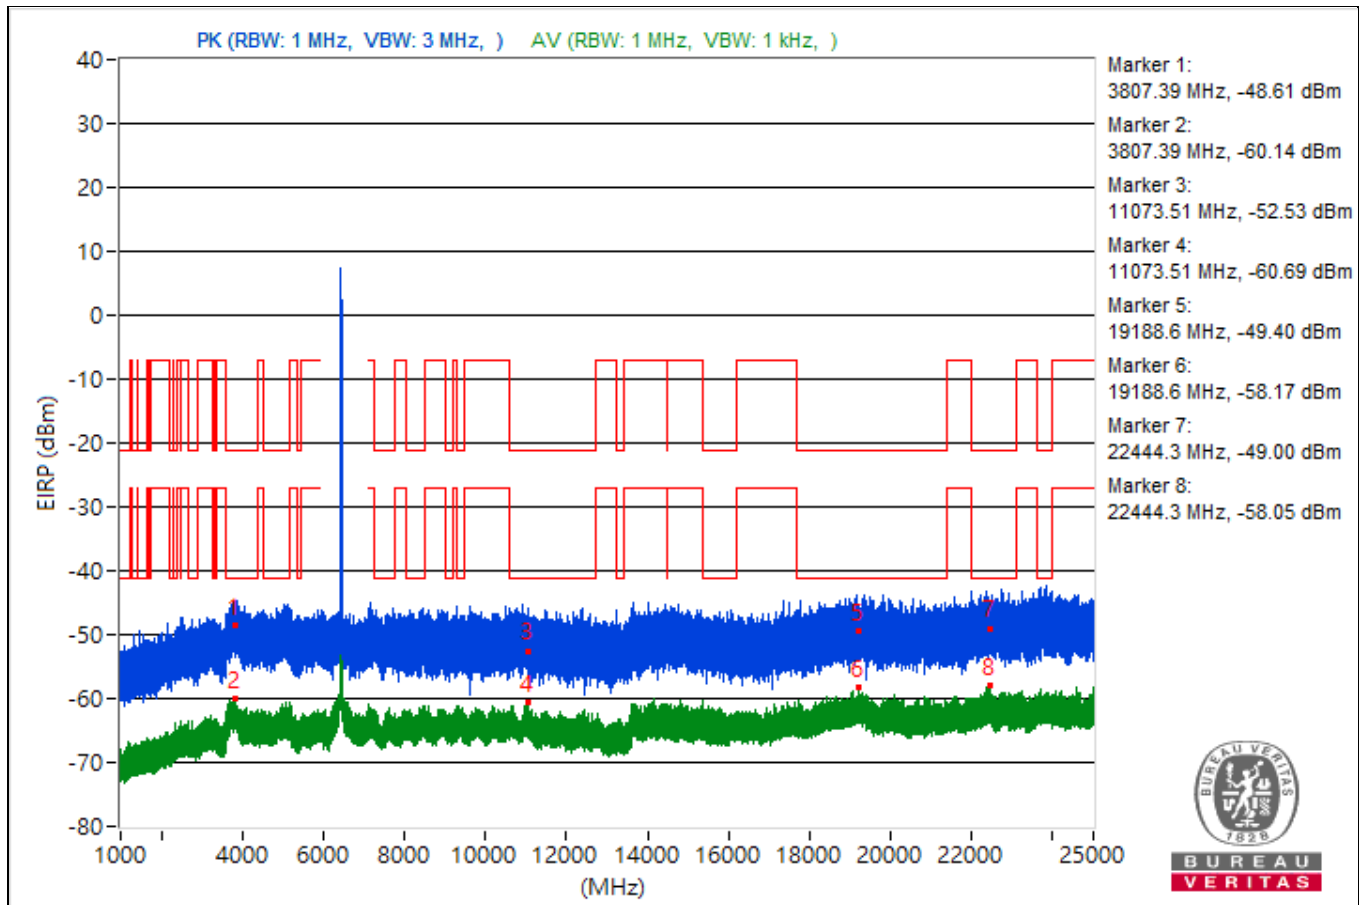


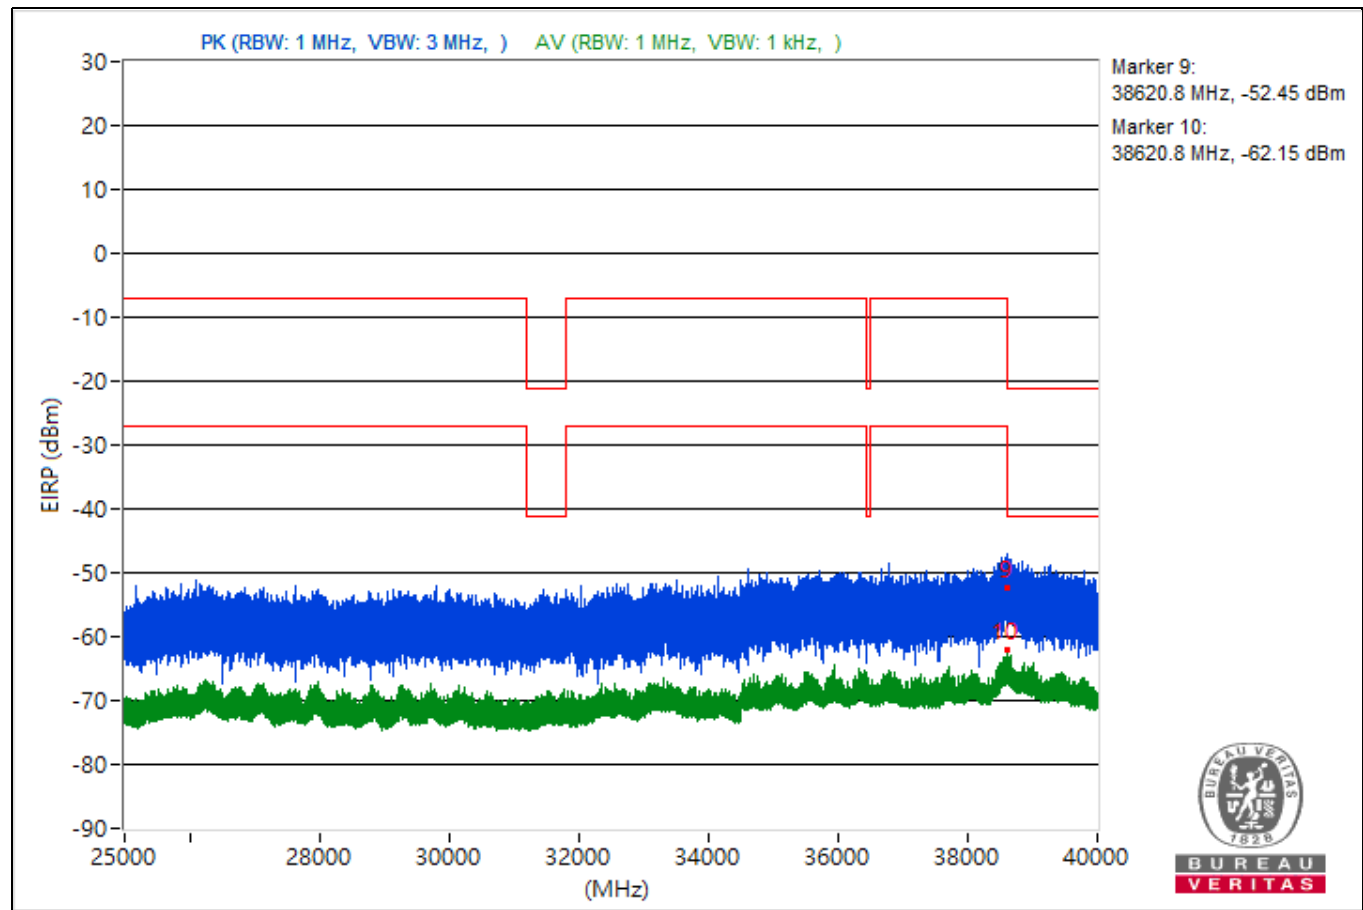


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.39	46.94 PK	74	-27.06	-53.24	4.92	-48.32
2	3786.39	35.53 AV	54	-18.47	-64.65	4.92	-59.73
3	14495.73	44.69 PK	74	-29.31	-55.49	4.92	-50.57
4	14495.73	34.57 AV	54	-19.43	-65.61	4.92	-60.69
5	18838.6	46.44 PK	74	-27.56	-53.74	4.92	-48.82
6	18838.6	36.53 AV	54	-17.47	-63.65	4.92	-58.73
7	23712.7	48.53 PK	74	-25.47	-51.65	4.92	-46.73
8	23712.7	36.37 AV	54	-17.63	-63.81	4.92	-58.89
9	38623.47	42.11 PK	74	-31.89	-58.07	4.92	-53.15
10	38623.47	32.11 AV	54	-21.89	-68.07	4.92	-63.15

Note: Margin value = Emission Level - Limit value

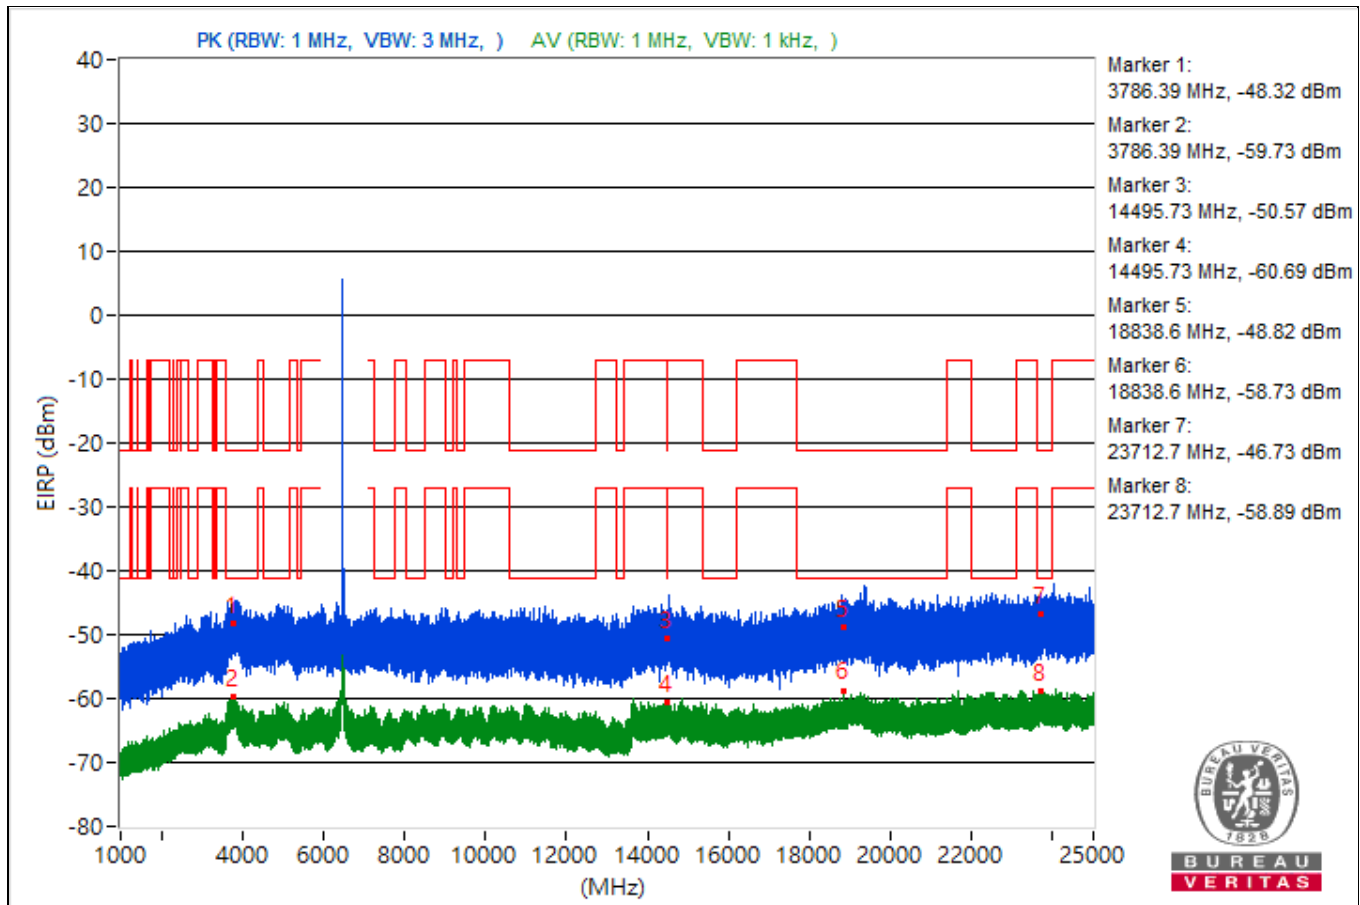


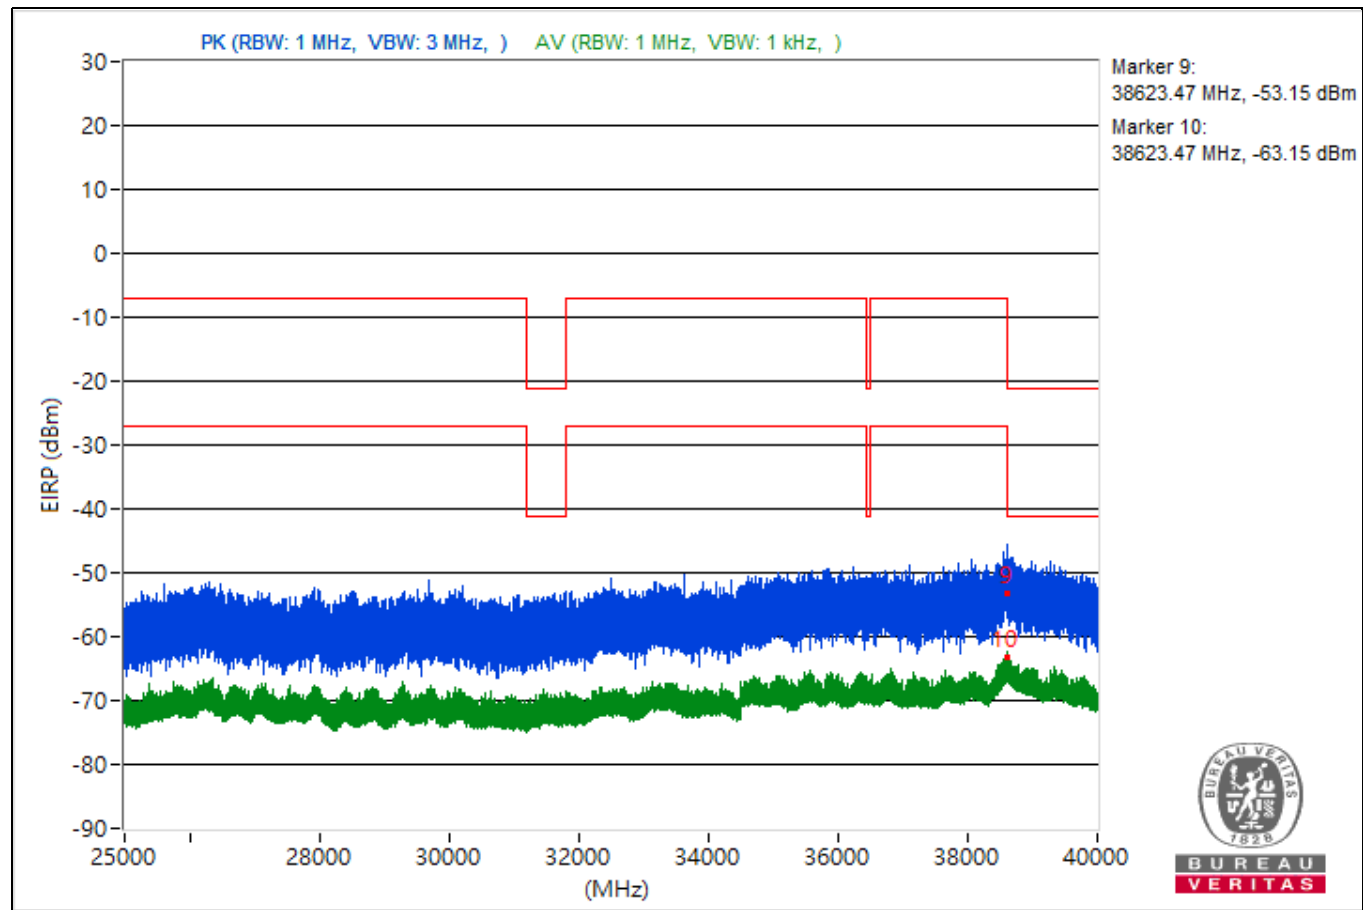


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3735.68	45.05 PK	74	-28.95	-55.13	4.92	-50.21
2	3735.68	35.7 AV	54	-18.3	-64.48	4.92	-59.56
3	8437.07	40.06 PK	74	-33.94	-60.12	4.92	-55.2
4	8437.07	34.9 AV	54	-19.1	-65.28	4.92	-60.36
5	19526.5	44.44 PK	74	-29.56	-55.74	4.92	-50.82
6	19526.5	36.35 AV	54	-17.65	-63.83	4.92	-58.91
7	23855.2	44.03 PK	74	-29.97	-56.15	4.92	-51.23
8	23855.2	36.88 AV	54	-17.12	-63.3	4.92	-58.38
9	38619.38	44.46 PK	74	-29.54	-55.72	4.92	-50.8
10	38619.38	31.51 AV	54	-22.49	-68.67	4.92	-63.75

Note: Margin value = Emission Level - Limit value

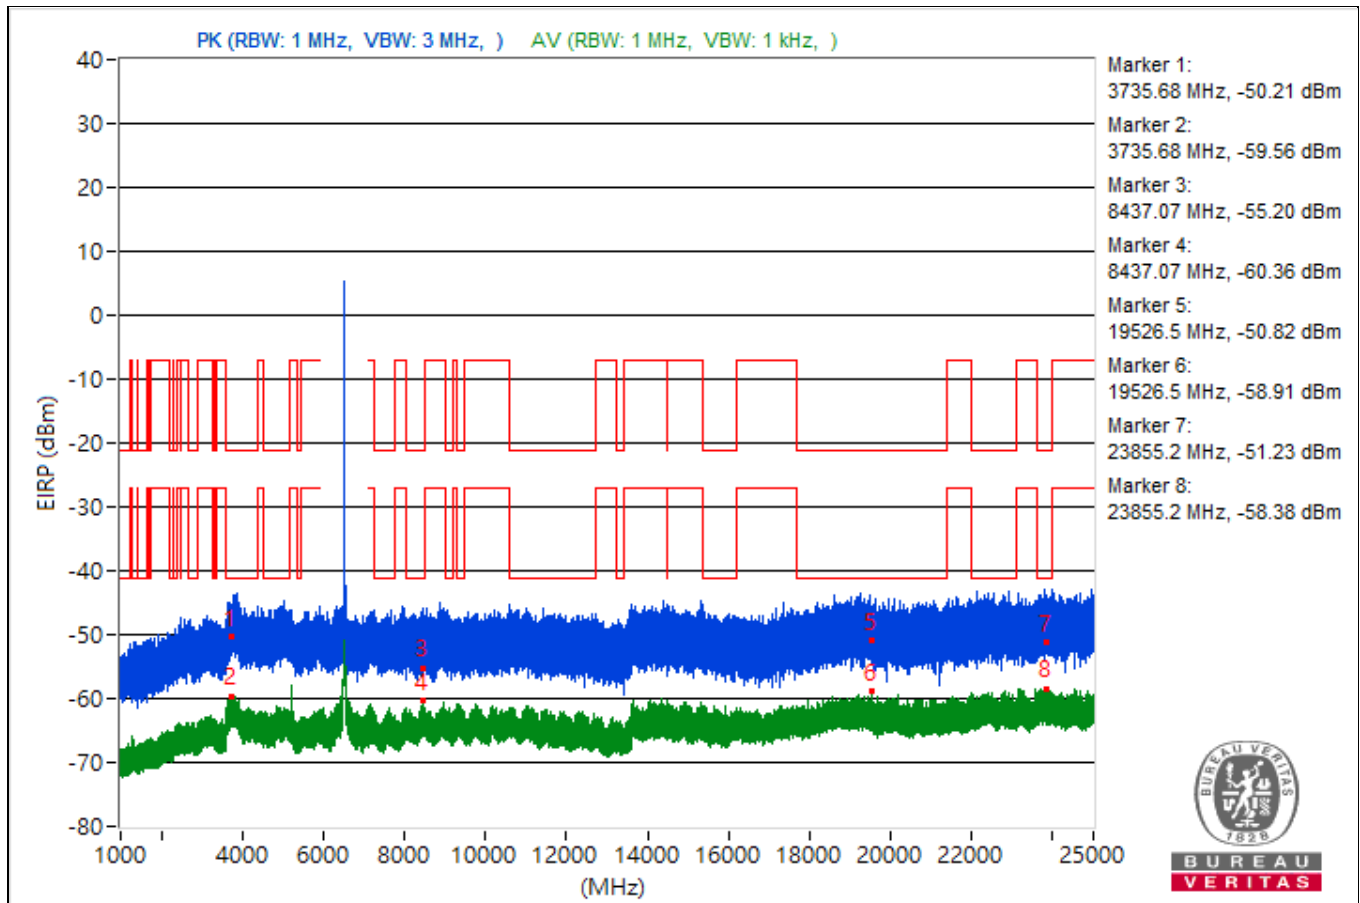


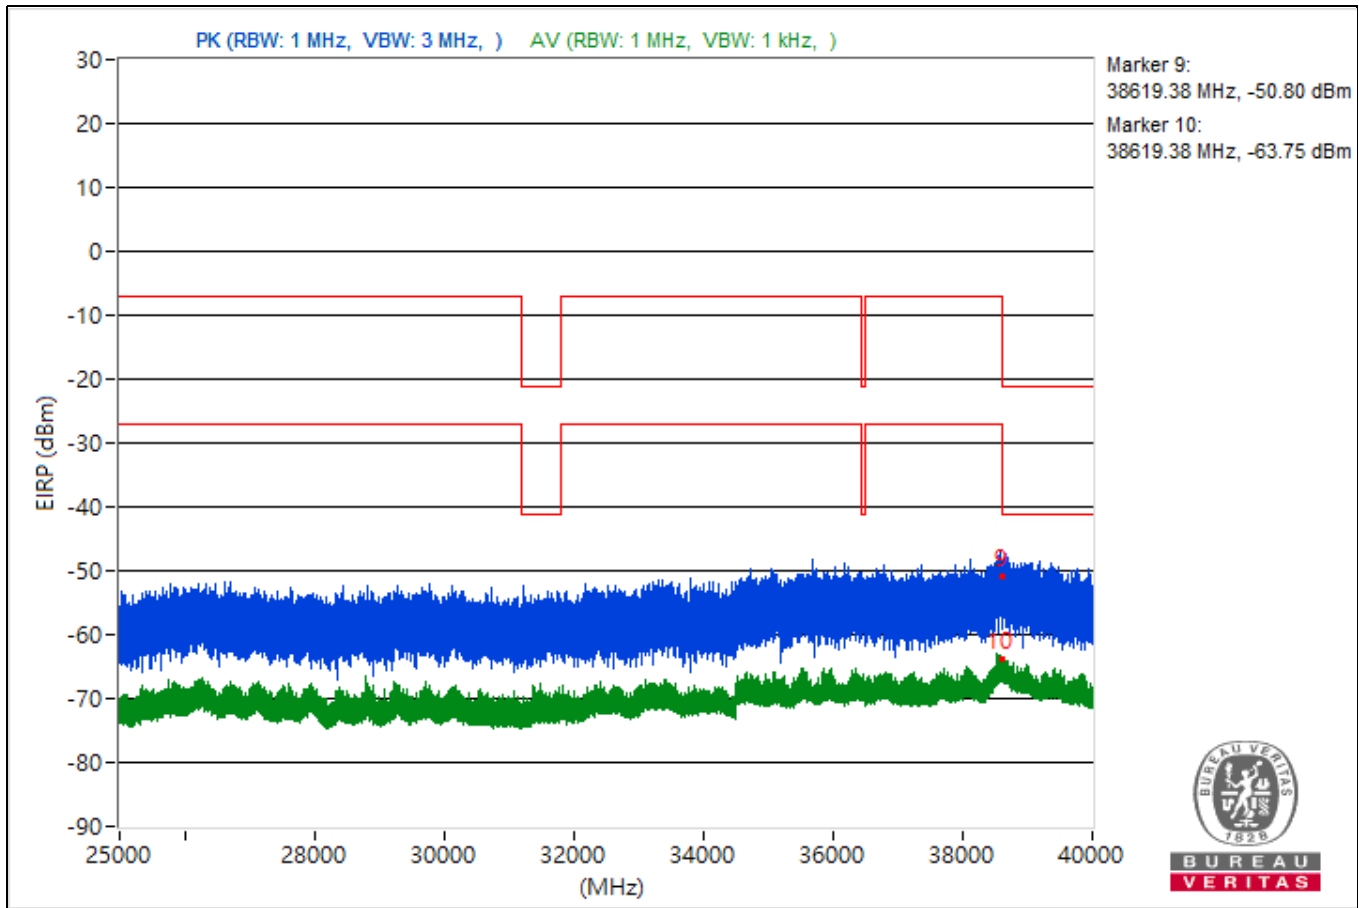


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3784.44	46.45 PK	74	-27.55	-53.73	4.92	-48.81
2	3784.44	35.71 AV	54	-18.29	-64.47	4.92	-59.55
3	8433.78	42.15 PK	74	-31.85	-58.03	4.92	-53.11
4	8433.78	34.59 AV	54	-19.41	-65.59	4.92	-60.67
5	20022.4	45.88 PK	74	-28.12	-54.3	4.92	-49.38
6	20022.4	36.07 AV	54	-17.93	-64.11	4.92	-59.19
7	23642.8	47.55 PK	74	-26.45	-52.63	4.92	-47.71
8	23642.8	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38627.38	42.91 PK	74	-31.09	-57.27	4.92	-52.35
10	38627.38	32.41 AV	54	-21.59	-67.77	4.92	-62.85

Note: Margin value = Emission Level - Limit value

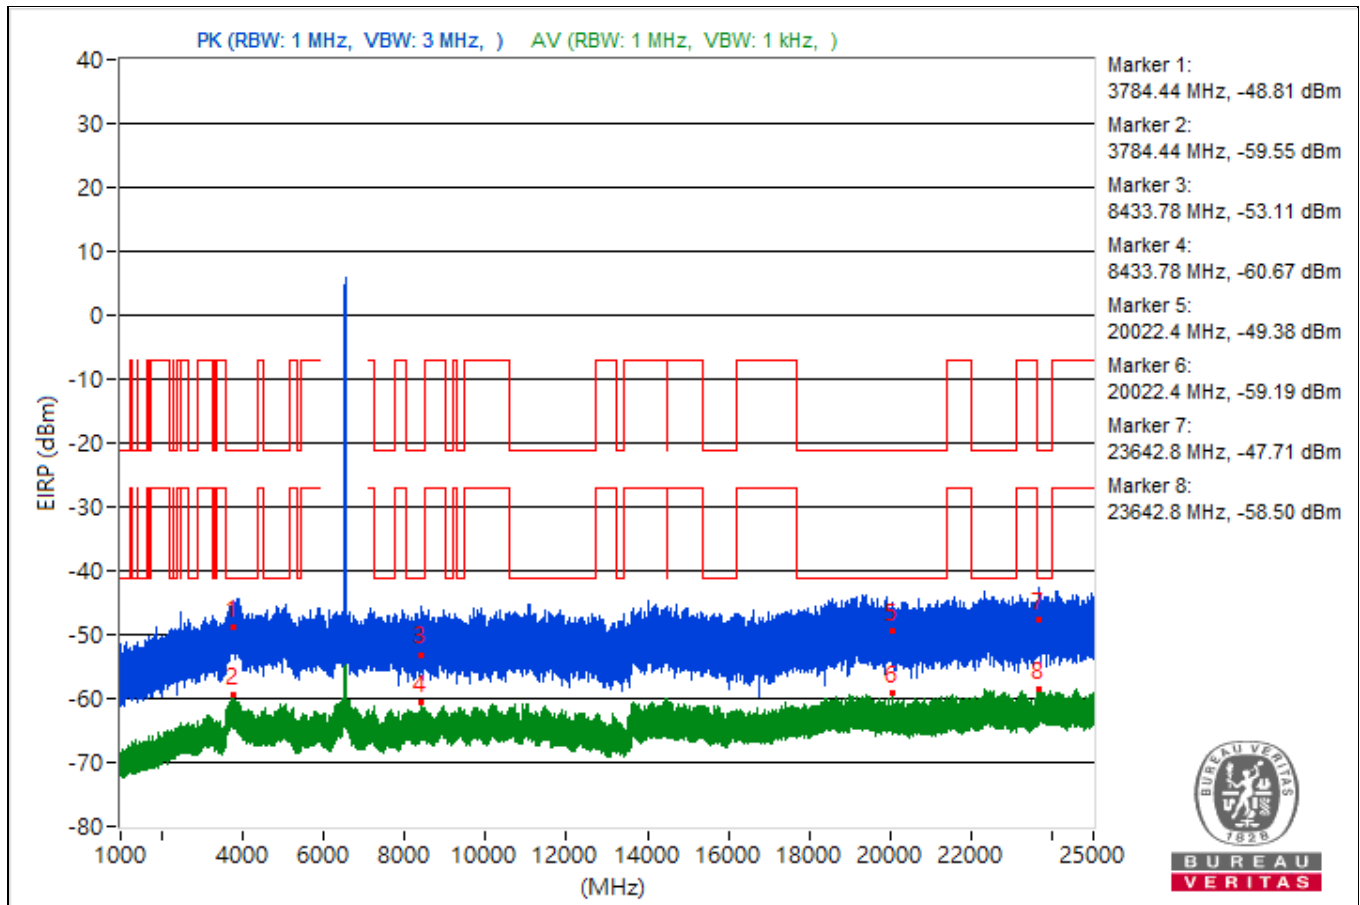


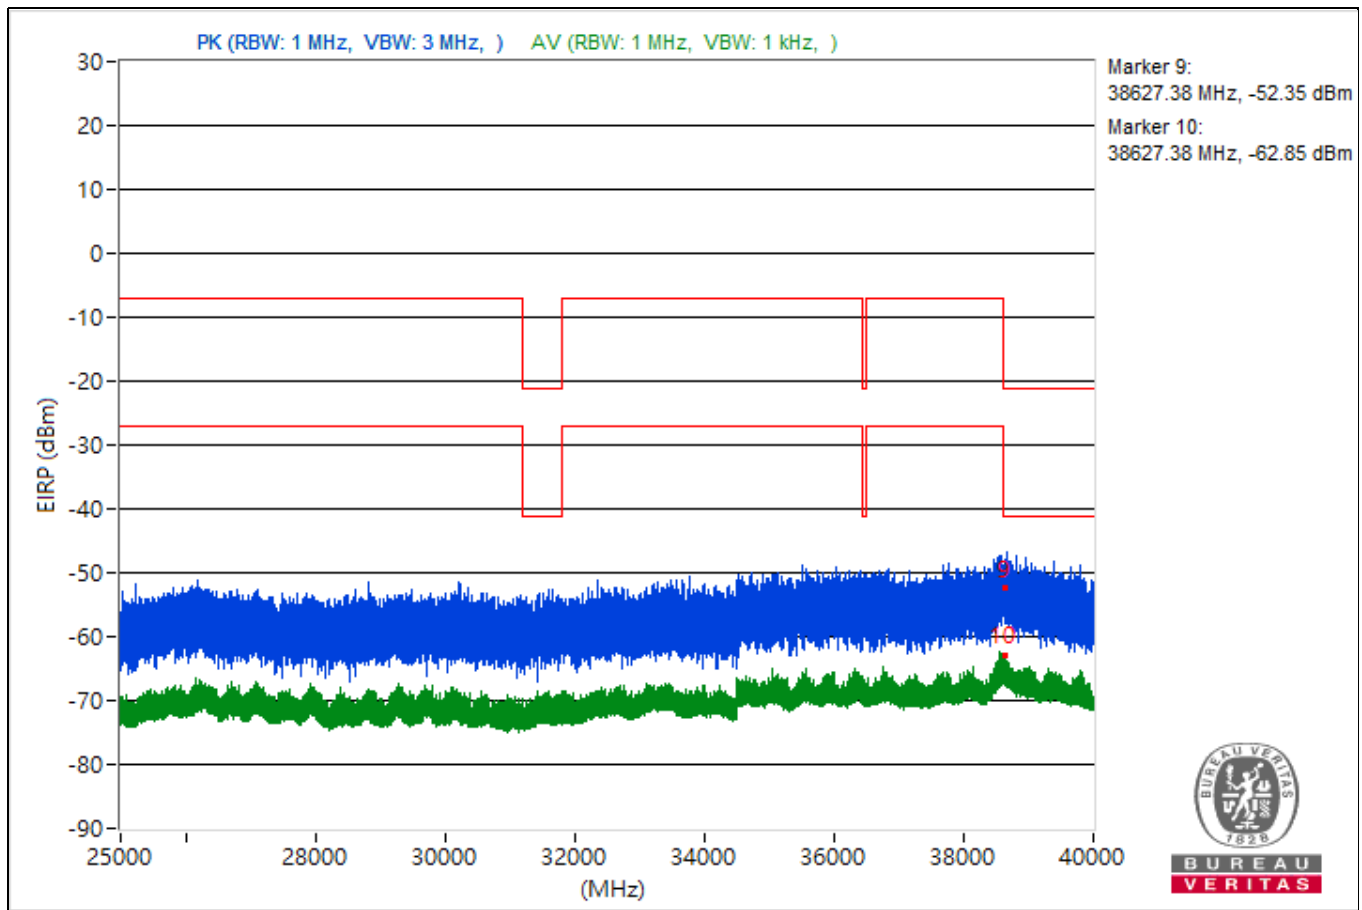


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.96	48.19 PK	74	-25.81	-51.99	4.92	-47.07
2	3809.96	35.84 AV	54	-18.16	-64.34	4.92	-59.42
3	14484.62	42.64 PK	74	-31.36	-57.54	4.92	-52.62
4	14484.62	35.26 AV	54	-18.74	-64.92	4.92	-60
5	18782.1	48.35 PK	74	-25.65	-51.83	4.92	-46.91
6	18782.1	36.36 AV	54	-17.64	-63.82	4.92	-58.9
7	22380.6	45.63 PK	74	-28.37	-54.55	4.92	-49.63
8	22380.6	36.77 AV	54	-17.23	-63.41	4.92	-58.49
9	38617.33	44.85 PK	74	-29.15	-55.33	4.92	-50.41
10	38617.33	32.17 AV	54	-21.83	-68.01	4.92	-63.09

Note: Margin value = Emission Level - Limit value

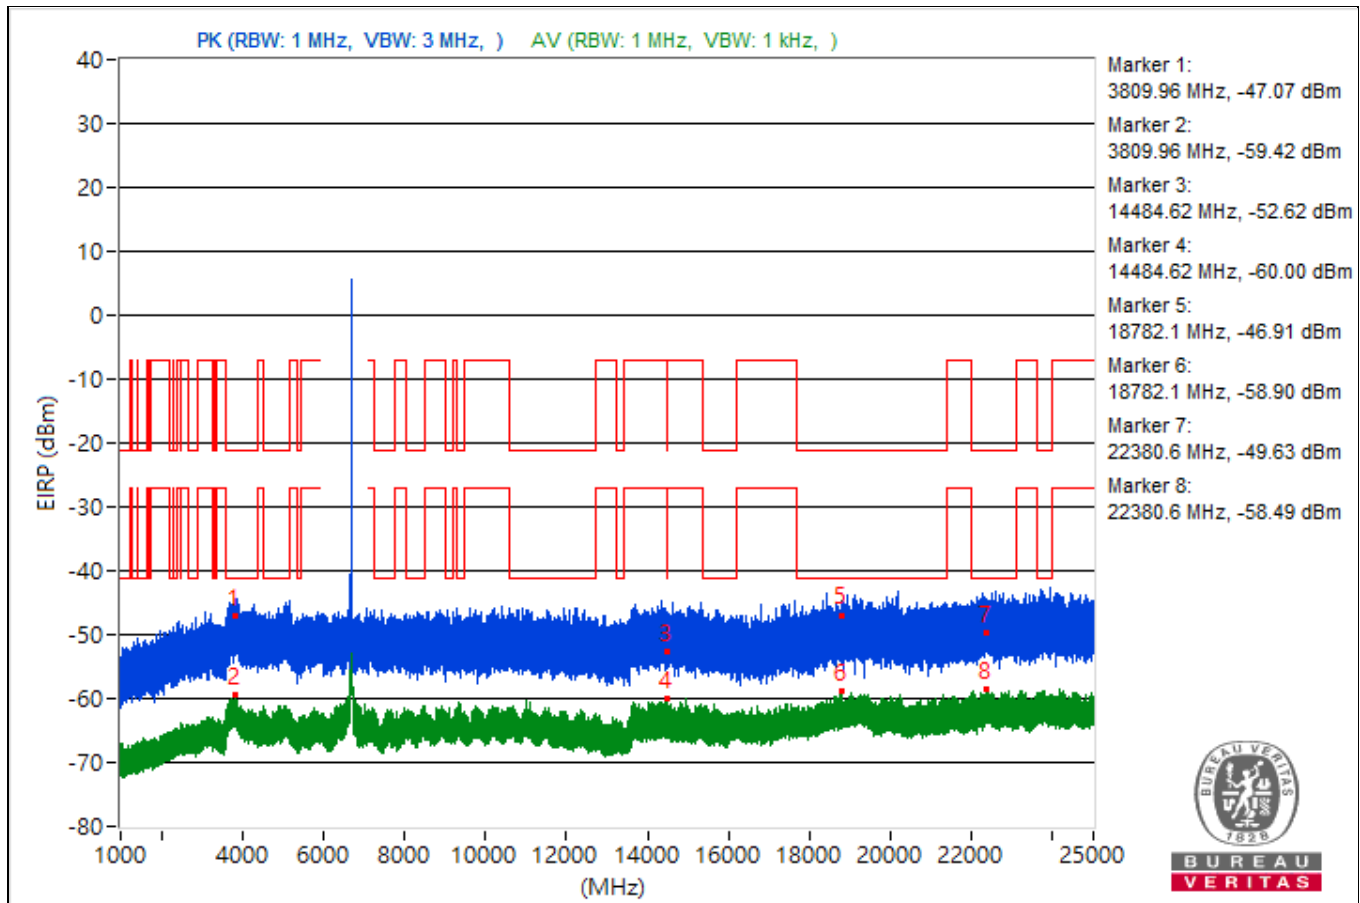


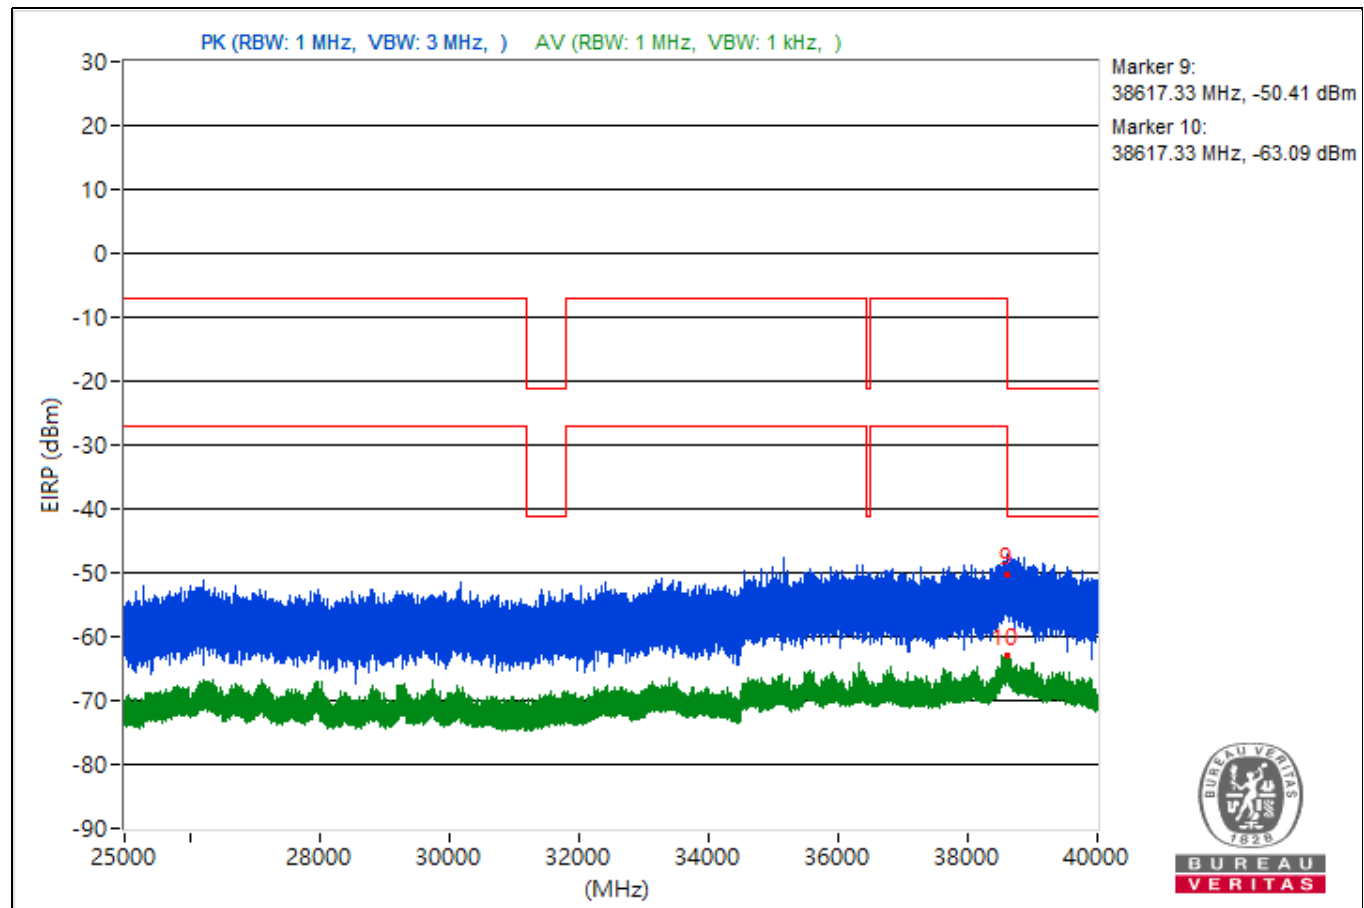


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3720.98	42.37 PK	74	-31.63	-57.81	4.92	-52.89
2	3720.98	35.62 AV	54	-18.38	-64.56	4.92	-59.64
3	14496.53	44.14 PK	74	-29.86	-56.04	4.92	-51.12
4	14496.53	34.58 AV	54	-19.42	-65.6	4.92	-60.68
5	19076.1	43.3 PK	74	-30.7	-56.88	4.92	-51.96
6	19076.1	36.16 AV	54	-17.84	-64.02	4.92	-59.1
7	22447.3	47.14 PK	74	-26.86	-53.04	4.92	-48.12
8	22447.3	37.1 AV	54	-16.9	-63.08	4.92	-58.16
9	38607.2	36.85 PK	74	-37.15	-63.33	4.92	-58.41
10	38607.2	31.91 AV	54	-22.09	-68.27	4.92	-63.35

Note: Margin value = Emission Level - Limit value

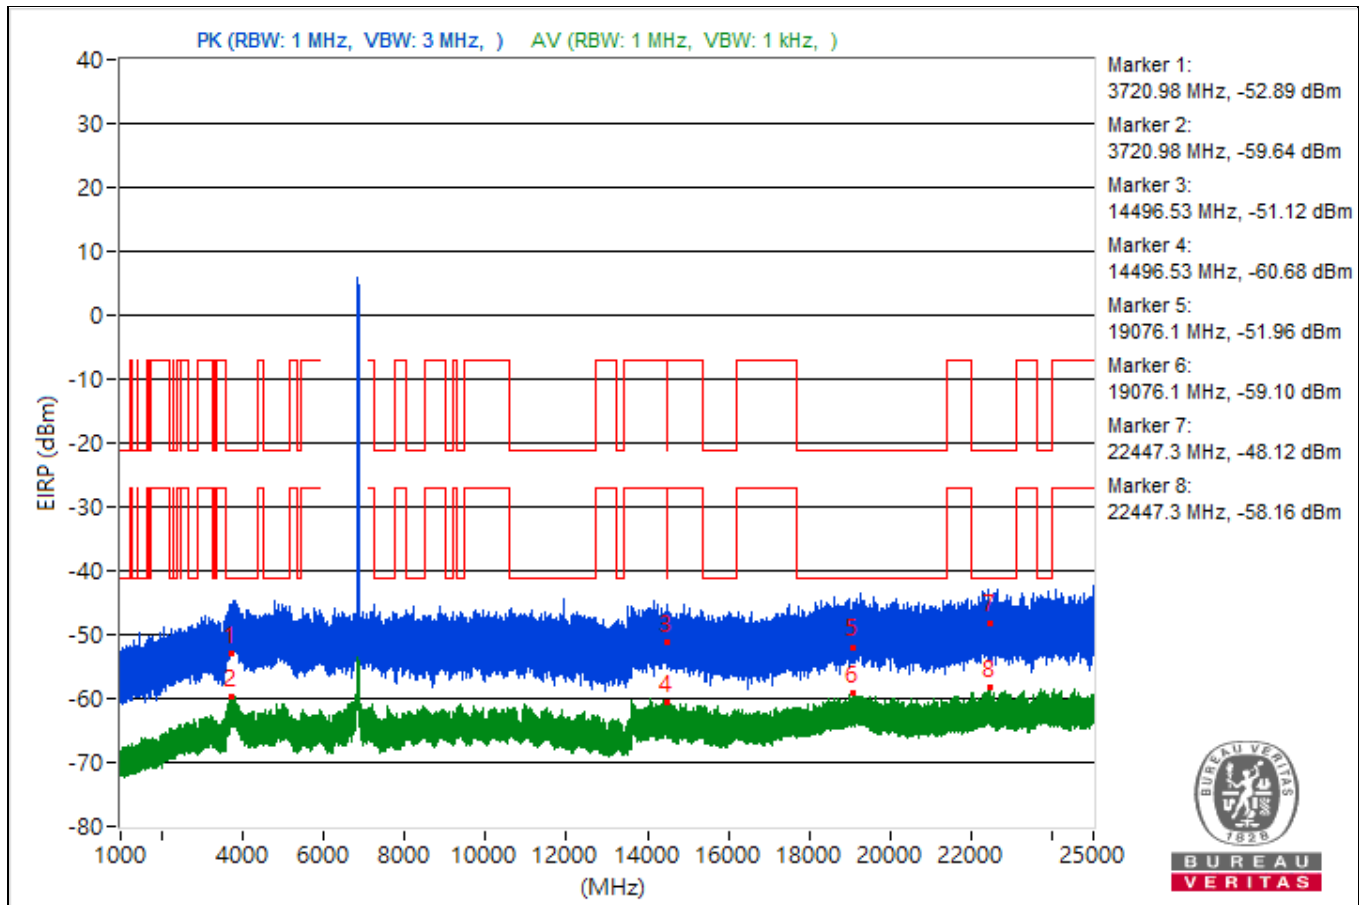


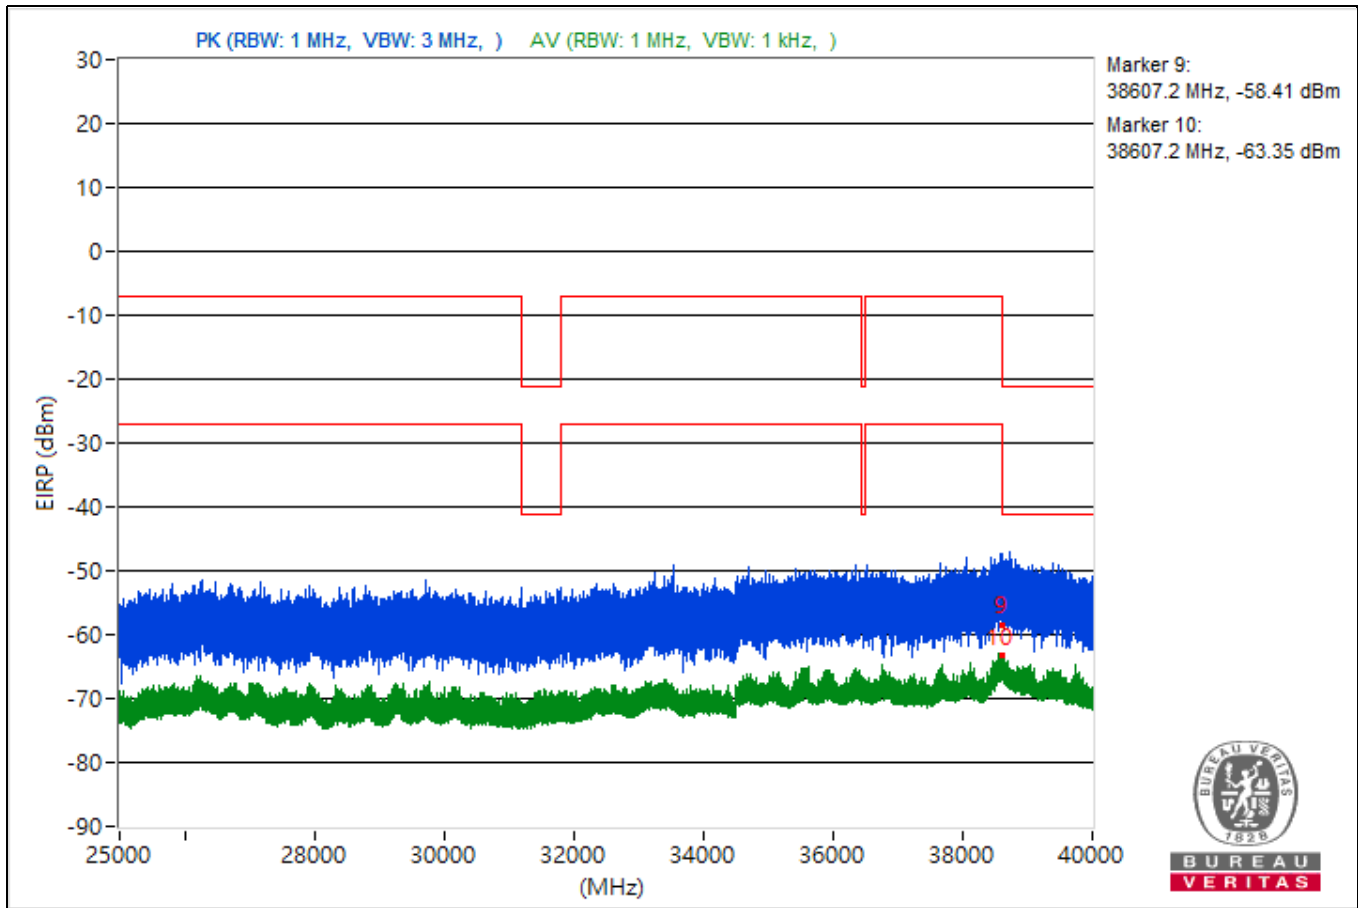


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.47	48.37 PK	74	-25.63	-51.81	4.92	-46.89
2	3786.47	35.78 AV	54	-18.22	-64.4	4.92	-59.48
3	10668.71	46.13 PK	74	-27.87	-54.05	4.92	-49.13
4	10668.71	34.47 AV	54	-19.53	-65.71	4.92	-60.79
5	19097.9	47.41 PK	74	-26.59	-52.77	4.92	-47.85
6	19097.9	36.49 AV	54	-17.51	-63.69	4.92	-58.77
7	23827.9	49.59 PK	74	-24.41	-50.59	4.92	-45.67
8	23827.9	36.78 AV	54	-17.22	-63.4	4.92	-58.48
9	38661.16	43.9 PK	74	-30.1	-56.28	4.92	-51.36
10	38661.16	32.65 AV	54	-21.35	-67.53	4.92	-62.61

Note: Margin value = Emission Level - Limit value

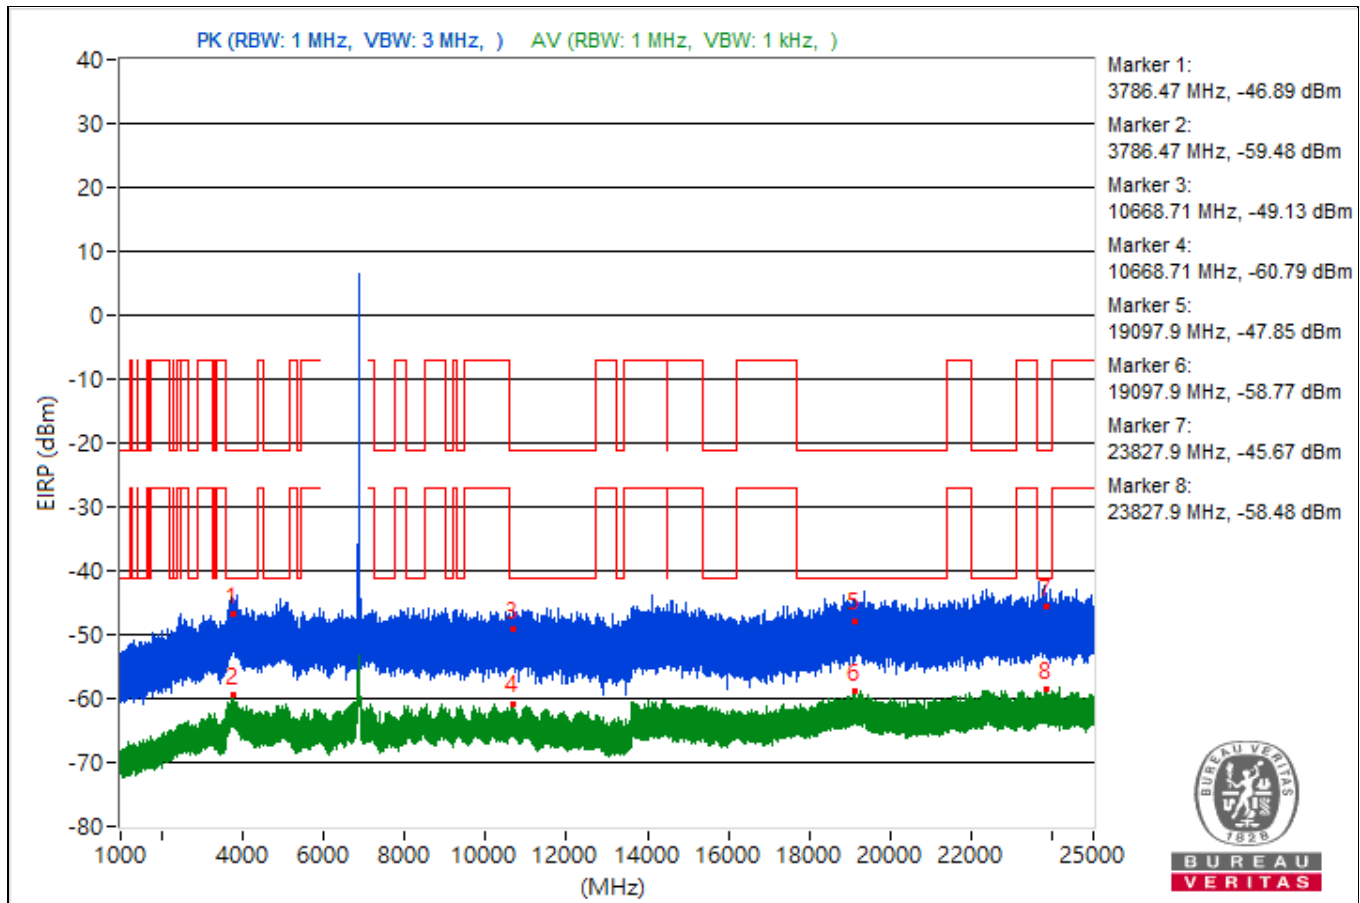


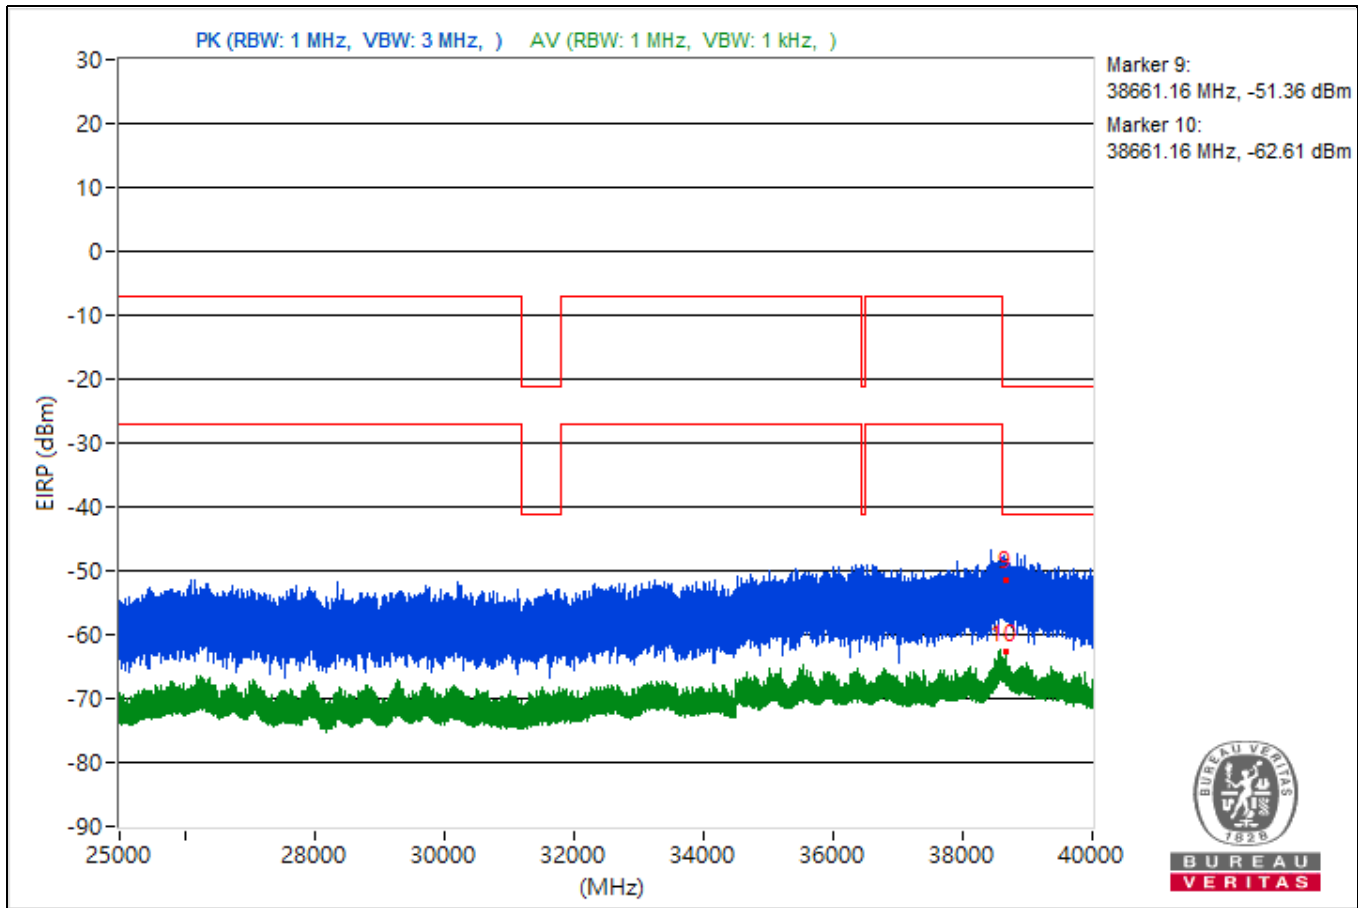


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.09	45.79 PK	74	-28.21	-54.39	4.92	-49.47
2	3808.09	36.35 AV	54	-17.65	-63.83	4.92	-58.91
3	8436.09	45.42 PK	74	-28.58	-54.76	4.92	-49.84
4	8436.09	34.86 AV	54	-19.14	-65.32	4.92	-60.4
5	19130.2	46.89 PK	74	-27.11	-53.29	4.92	-48.37
6	19130.2	36.12 AV	54	-17.88	-64.06	4.92	-59.14
7	22403.6	47.63 PK	74	-26.37	-52.55	4.92	-47.63
8	22403.6	36.87 AV	54	-17.13	-63.31	4.92	-58.39
9	38606.31	43.25 PK	74	-30.75	-56.93	4.92	-52.01
10	38606.31	32.22 AV	54	-21.78	-67.96	4.92	-63.04

Note: Margin value = Emission Level - Limit value

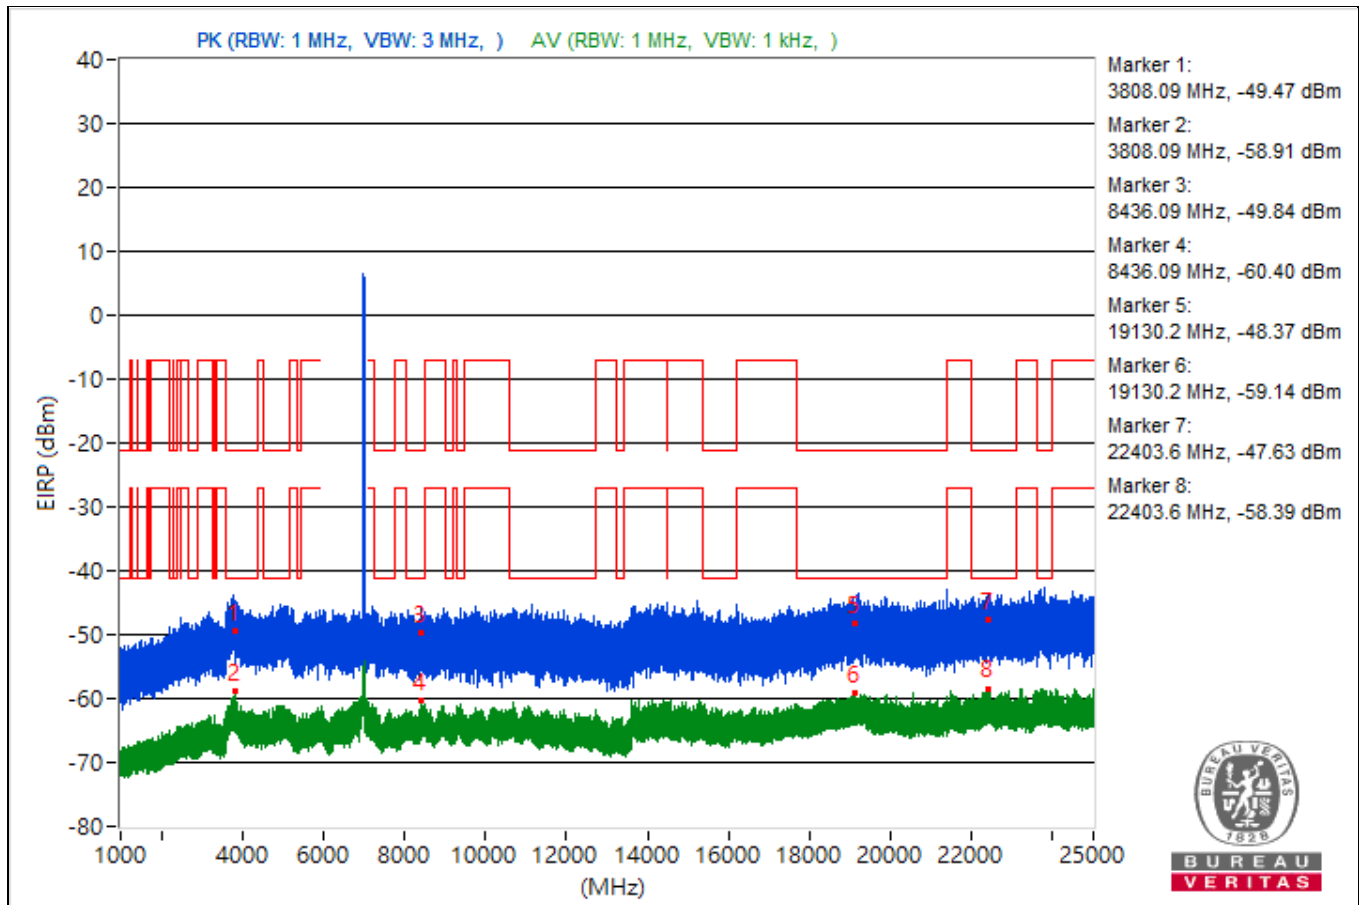


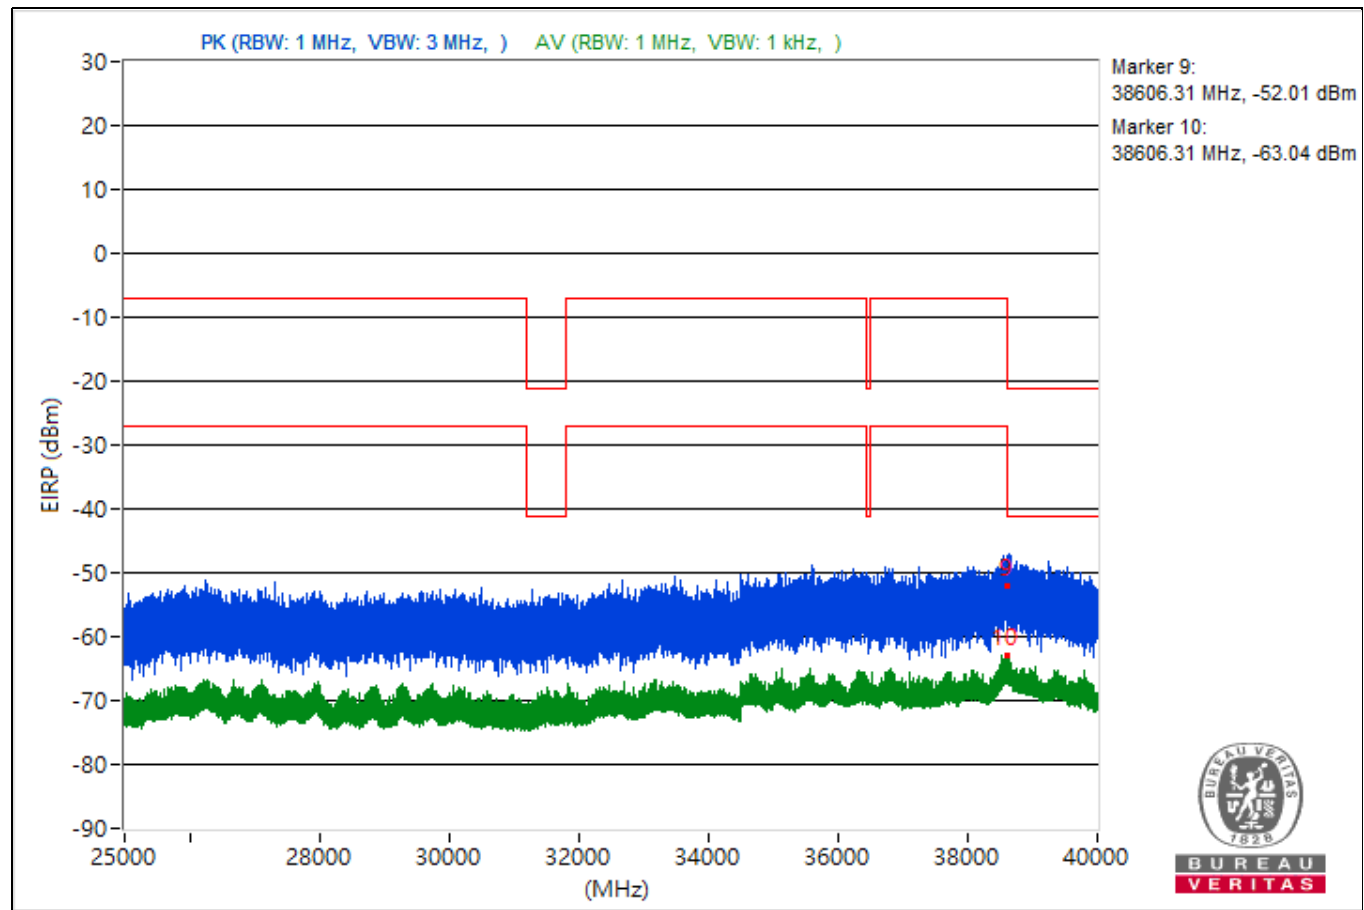


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.9	48.33 PK	74	-25.67	-51.85	4.92	-46.93
2	3832.9	35.79 AV	54	-18.21	-64.39	4.92	-59.47
3	15408.36	45.2 PK	74	-28.8	-54.98	4.92	-50.06
4	15408.36	34.62 AV	54	-19.38	-65.56	4.92	-60.64
5	18862.3	43.02 PK	74	-30.98	-57.16	4.92	-52.24
6	18862.3	36.08 AV	54	-17.92	-64.1	4.92	-59.18
7	23698	46.33 PK	74	-27.67	-53.85	4.92	-48.93
8	23698	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38653.87	42.05 PK	74	-31.95	-58.13	4.92	-53.21
10	38653.87	31.92 AV	54	-22.08	-68.26	4.92	-63.34

Note: Margin value = Emission Level - Limit value

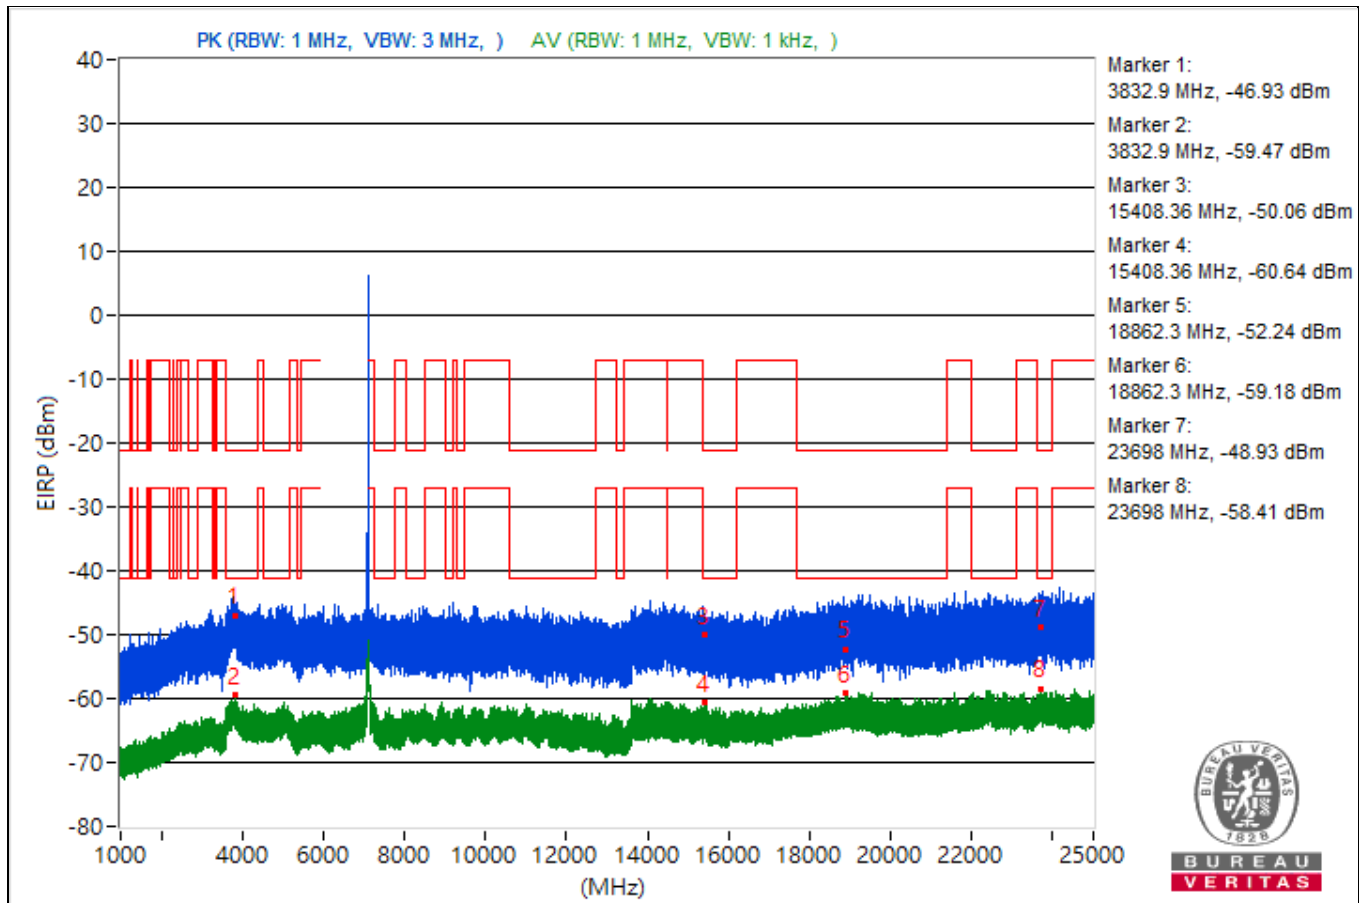


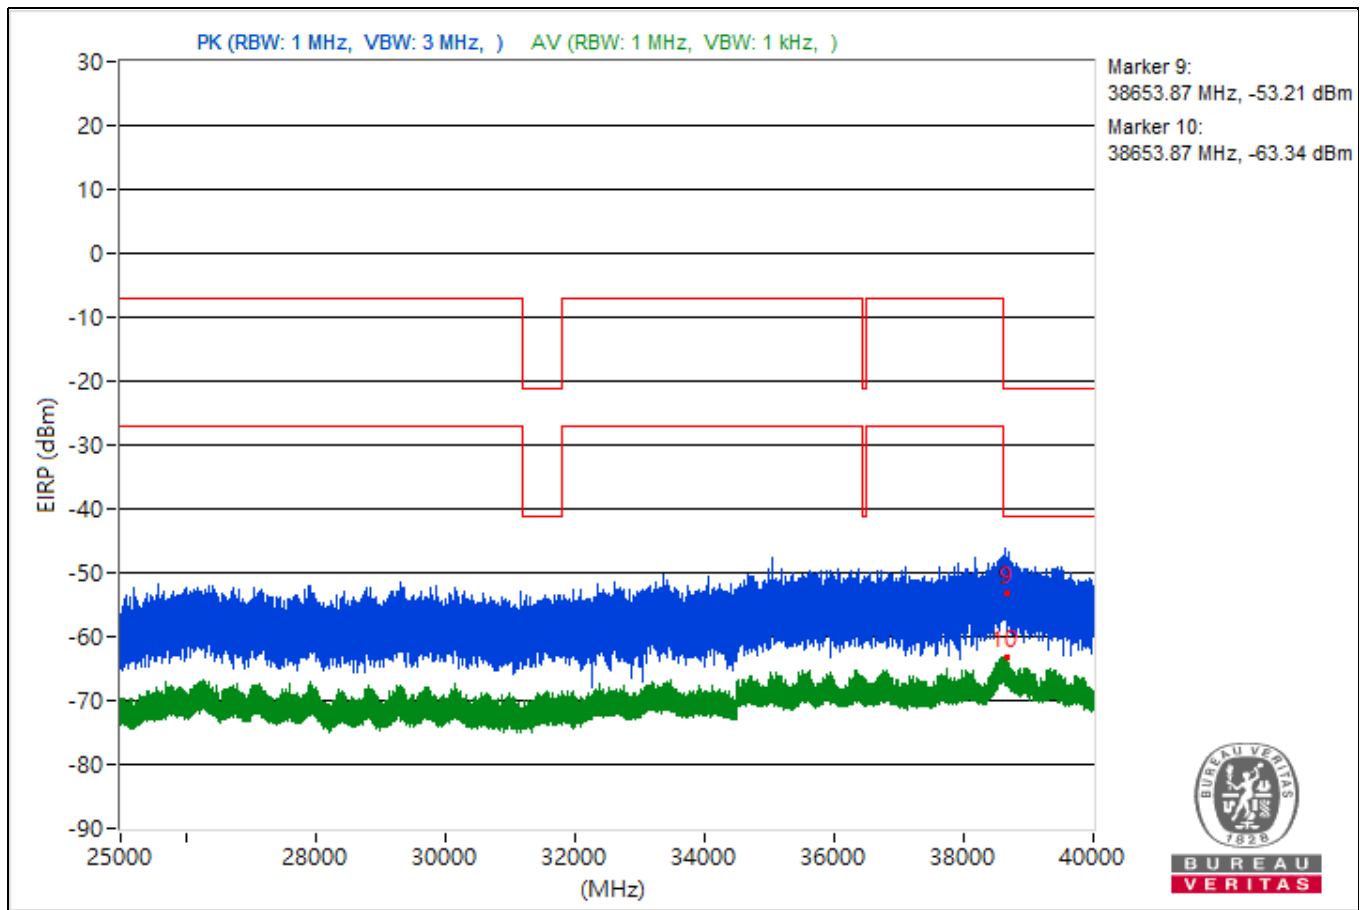


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3848.46	47.65 PK	74	-26.35	-52.53	4.92	-47.61
2	3848.46	35.19 AV	54	-18.81	-64.99	4.92	-60.07
3	14495.47	46.41 PK	74	-27.59	-53.77	4.92	-48.85
4	14495.47	34.62 AV	54	-19.38	-65.56	4.92	-60.64
5	19059.7	43.62 PK	74	-30.38	-56.56	4.92	-51.64
6	19059.7	35.88 AV	54	-18.12	-64.3	4.92	-59.38
7	22439.3	48.98 PK	74	-25.02	-51.2	4.92	-46.28
8	22439.3	36.86 AV	54	-17.14	-63.32	4.92	-58.4
9	38611.73	43.1 PK	74	-30.9	-57.08	4.92	-52.16
10	38611.73	33.19 AV	54	-20.81	-66.99	4.92	-62.07

Note: Margin value = Emission Level - Limit value

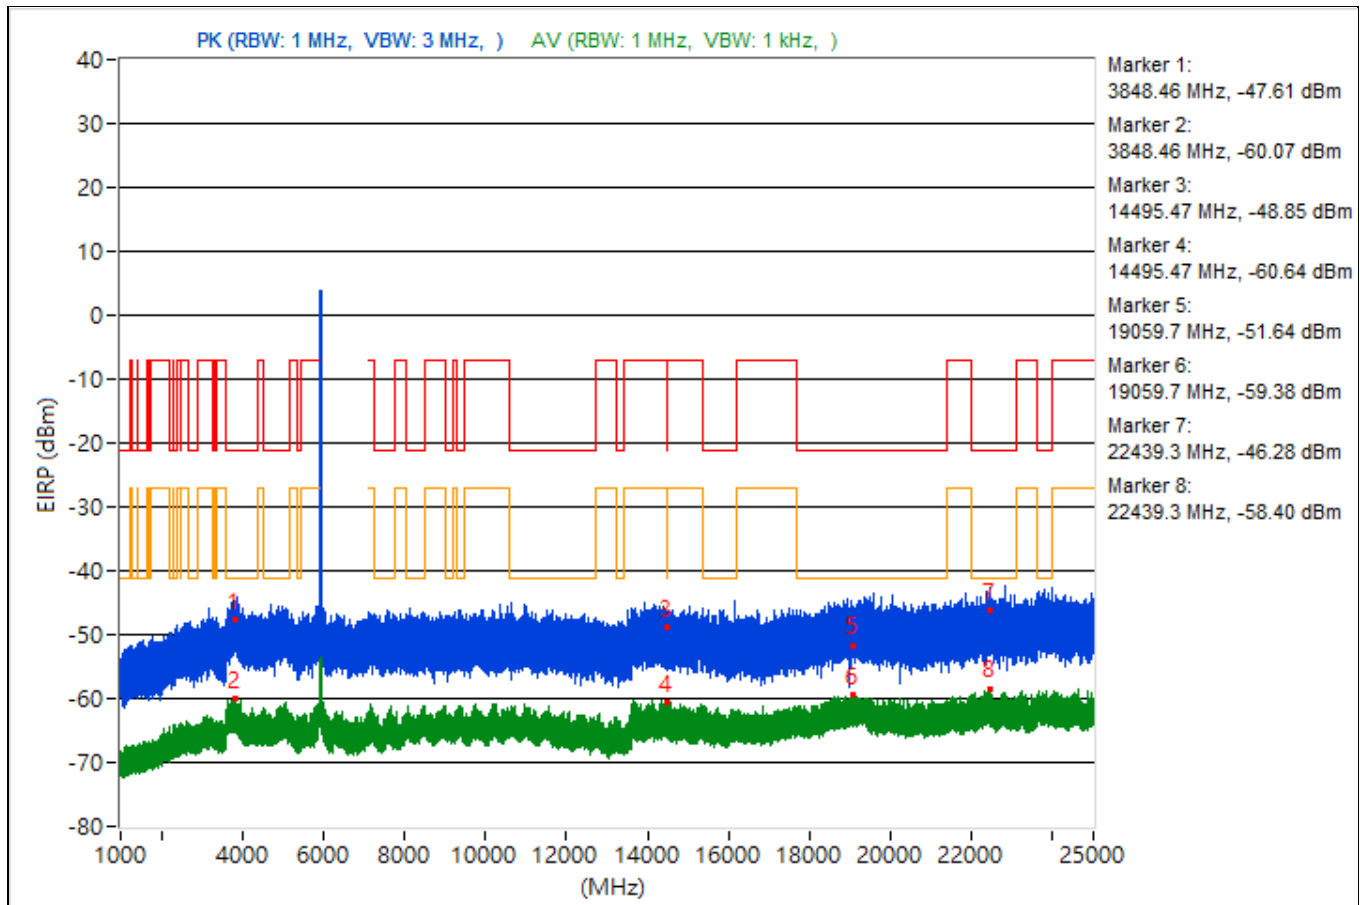


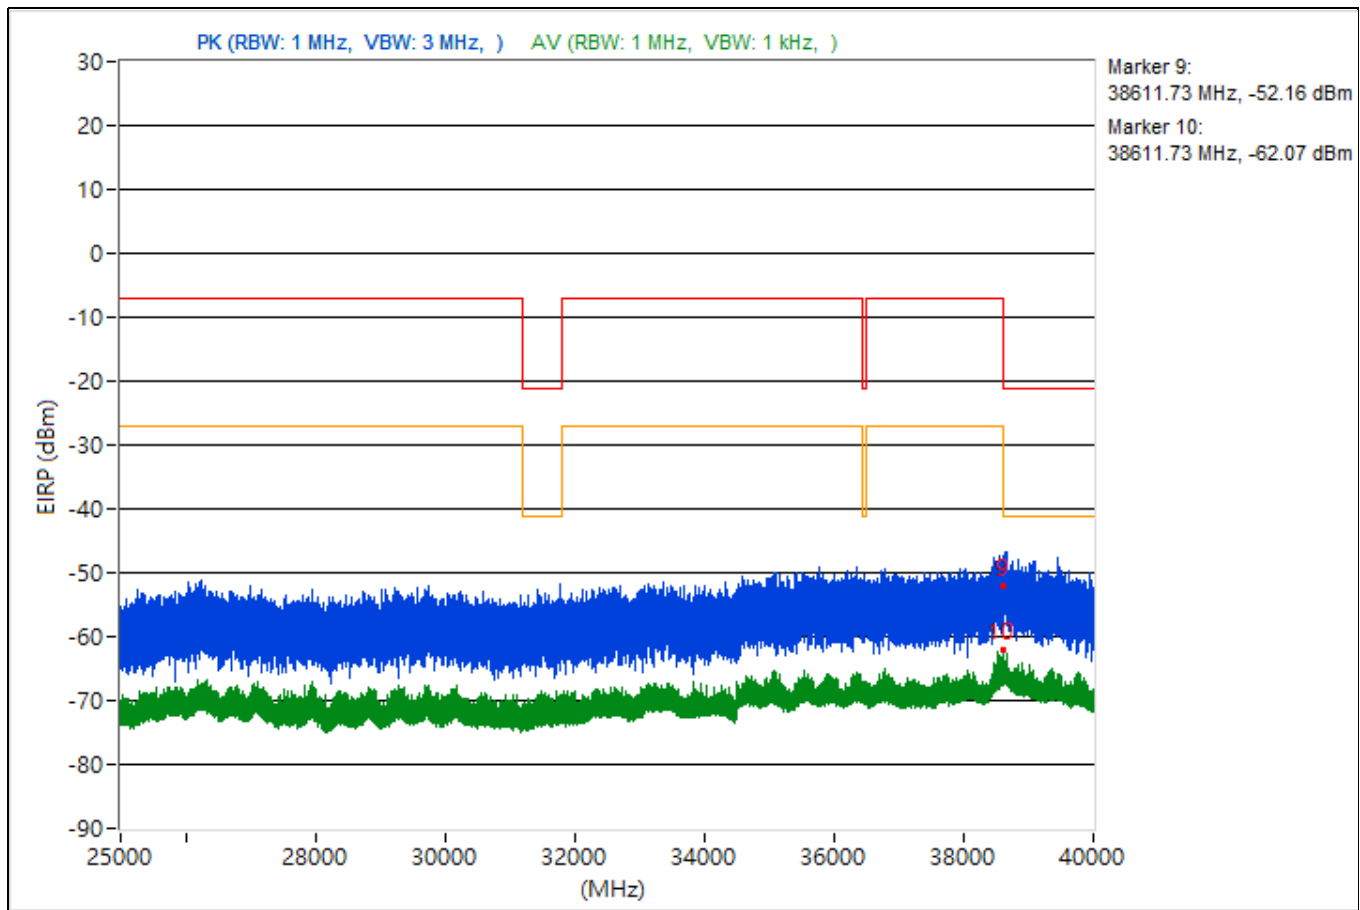


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3741.51	47.52 PK	74	-26.48	-52.66	4.92	-47.74
2	3741.51	35.32 AV	54	-18.68	-64.86	4.92	-59.94
3	14490.84	45.3 PK	74	-28.7	-54.88	4.92	-49.96
4	14490.84	34.79 AV	54	-19.21	-65.39	4.92	-60.47
5	18995.6	43.75 PK	74	-30.25	-56.43	4.92	-51.51
6	18995.6	35.76 AV	54	-18.24	-64.42	4.92	-59.5
7	23710.8	45.32 PK	74	-28.68	-54.86	4.92	-49.94
8	23710.8	36.53 AV	54	-17.47	-63.65	4.92	-58.73
9	38617.33	45.49 PK	74	-28.51	-54.69	4.92	-49.77
10	38617.33	32.6 AV	54	-21.4	-67.58	4.92	-62.66

Note: Margin value = Emission Level - Limit value

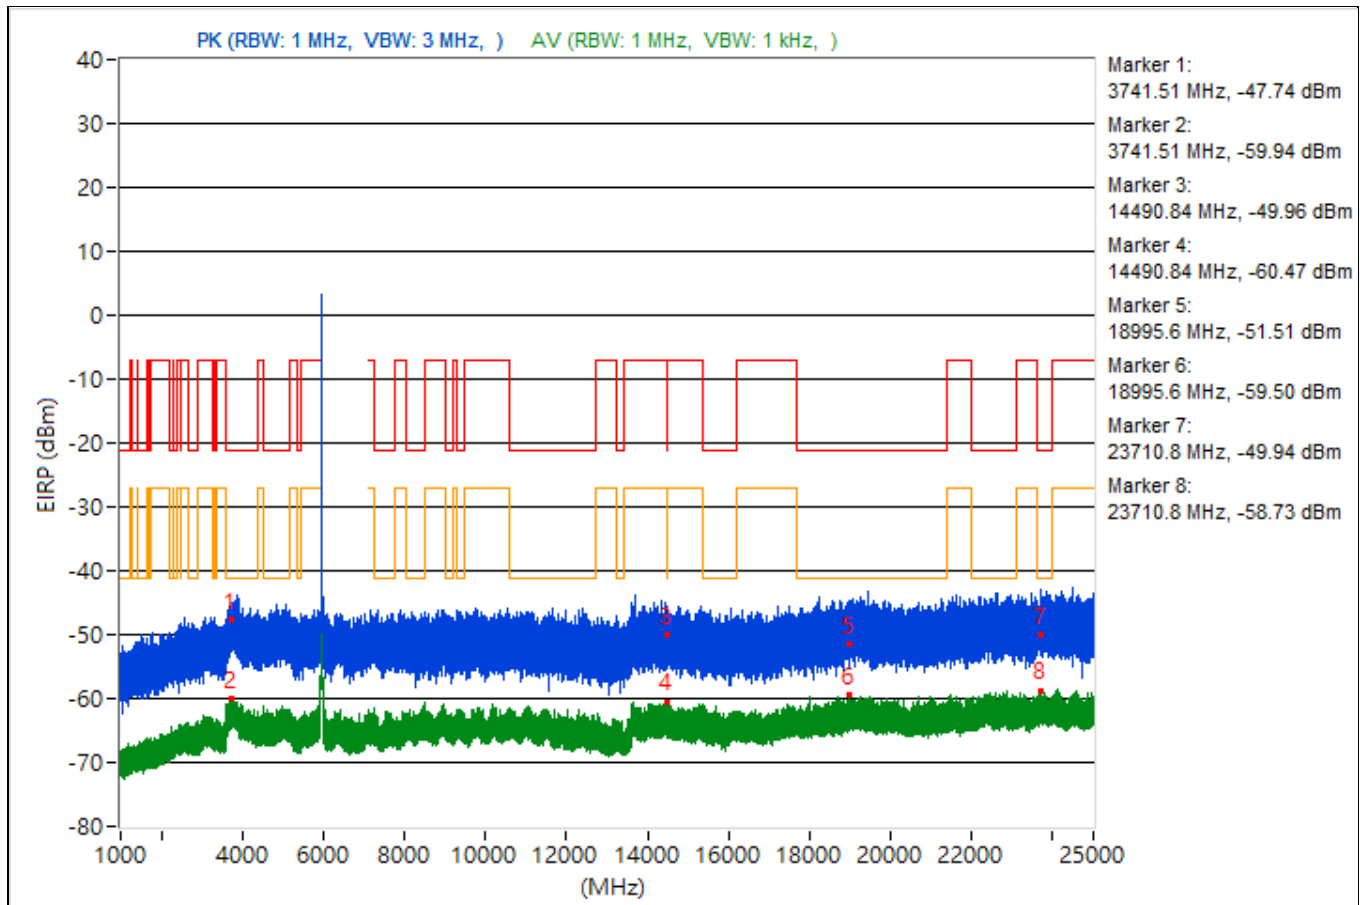


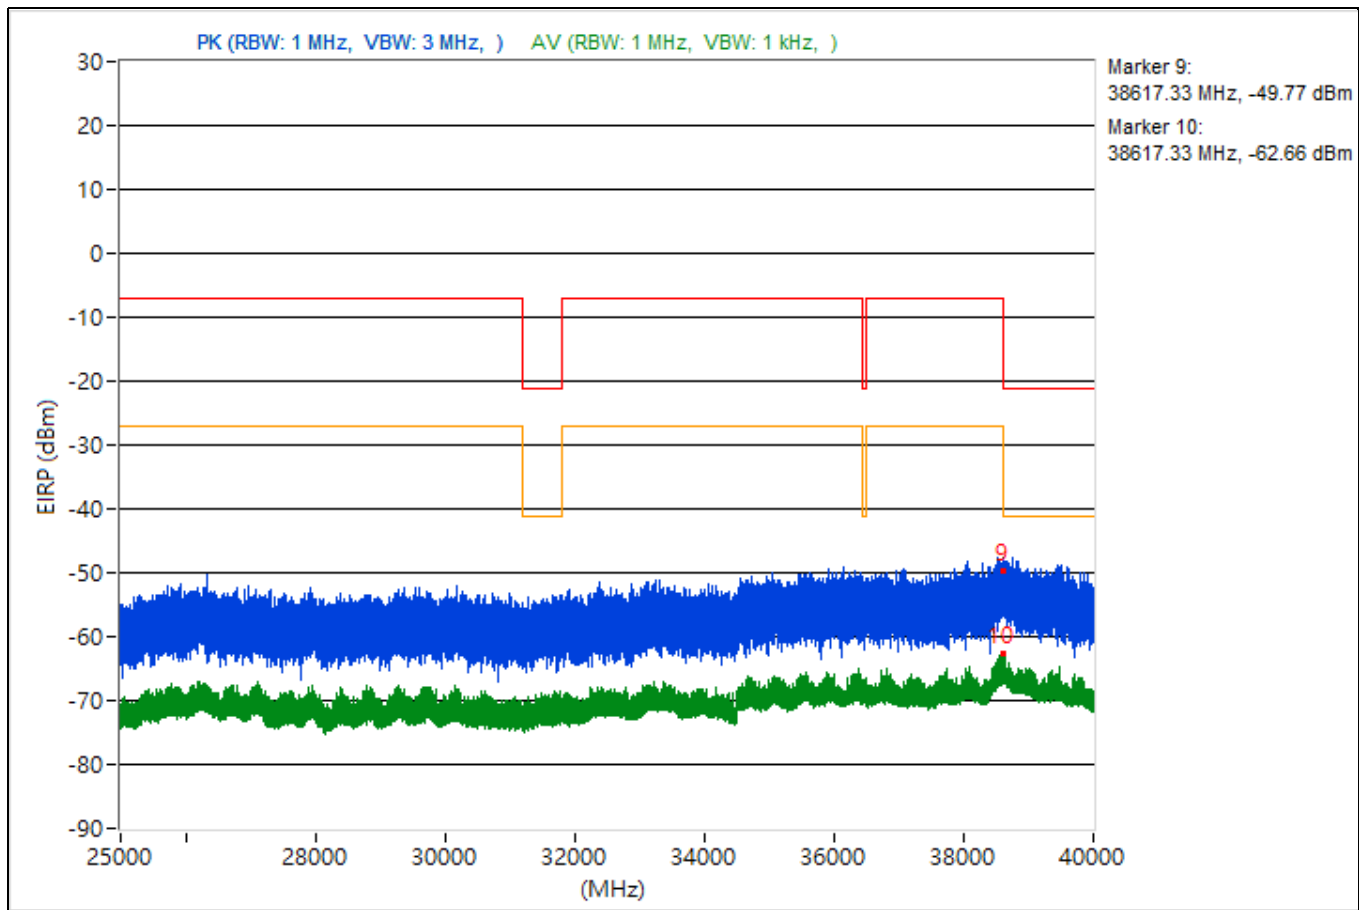


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.61	46.97 PK	74	-27.03	-53.21	4.92	-48.29
2	3792.61	35.57 AV	54	-18.43	-64.61	4.92	-59.69
3	8455.56	43.87 PK	74	-30.13	-56.31	4.92	-51.39
4	8455.56	34.71 AV	54	-19.29	-65.47	4.92	-60.55
5	19131.7	41.34 PK	74	-32.66	-58.84	4.92	-53.92
6	19131.7	36.19 AV	54	-17.81	-63.99	4.92	-59.07
7	23727	45.07 PK	74	-28.93	-55.11	4.92	-50.19
8	23727	36.68 AV	54	-17.32	-63.5	4.92	-58.58
9	38611.64	40.73 PK	74	-33.27	-59.45	4.92	-54.53
10	38611.64	31.95 AV	54	-22.05	-68.23	4.92	-63.31

Note: Margin value = Emission Level - Limit value

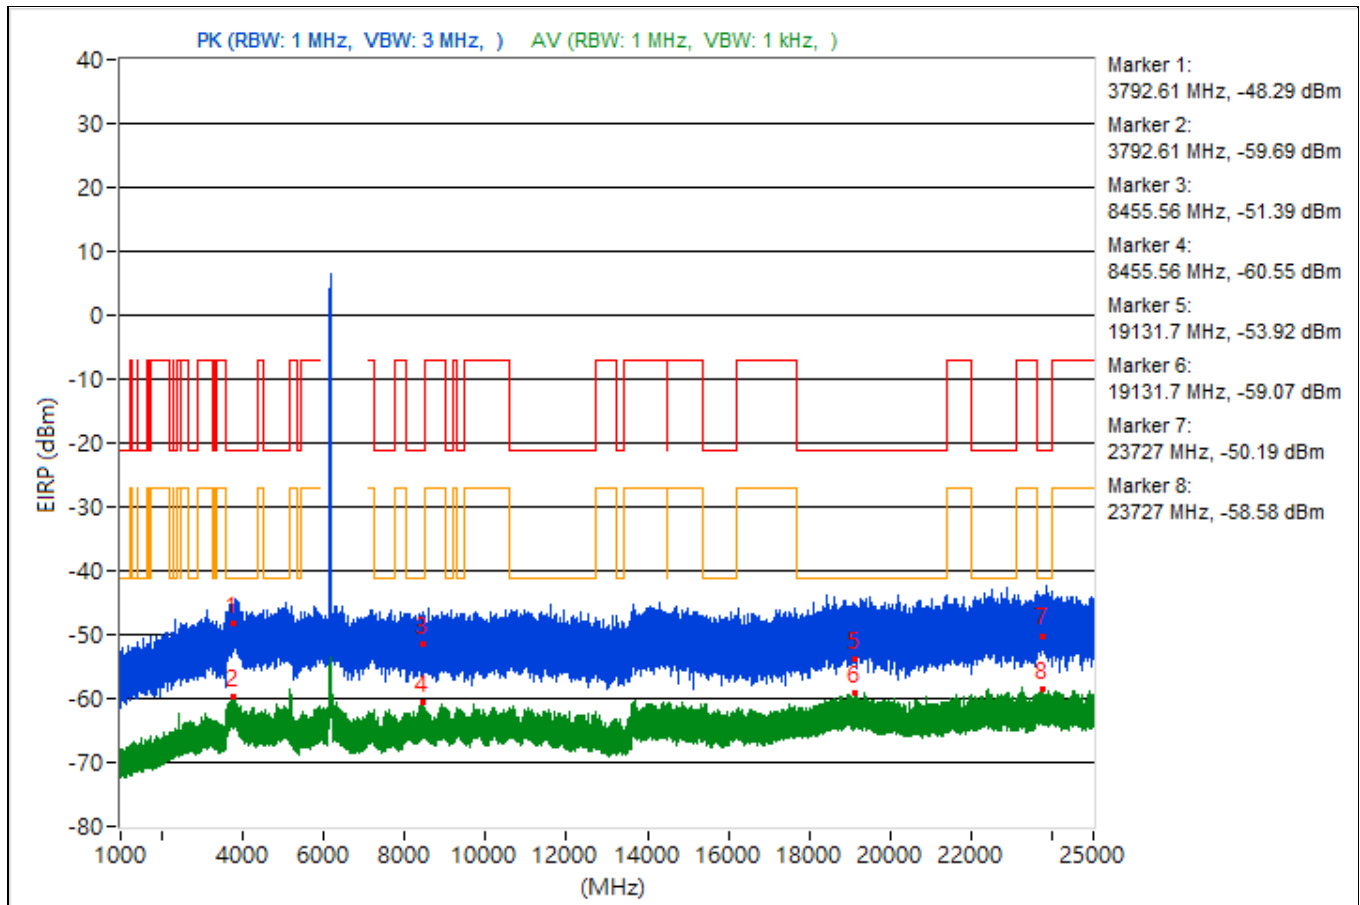


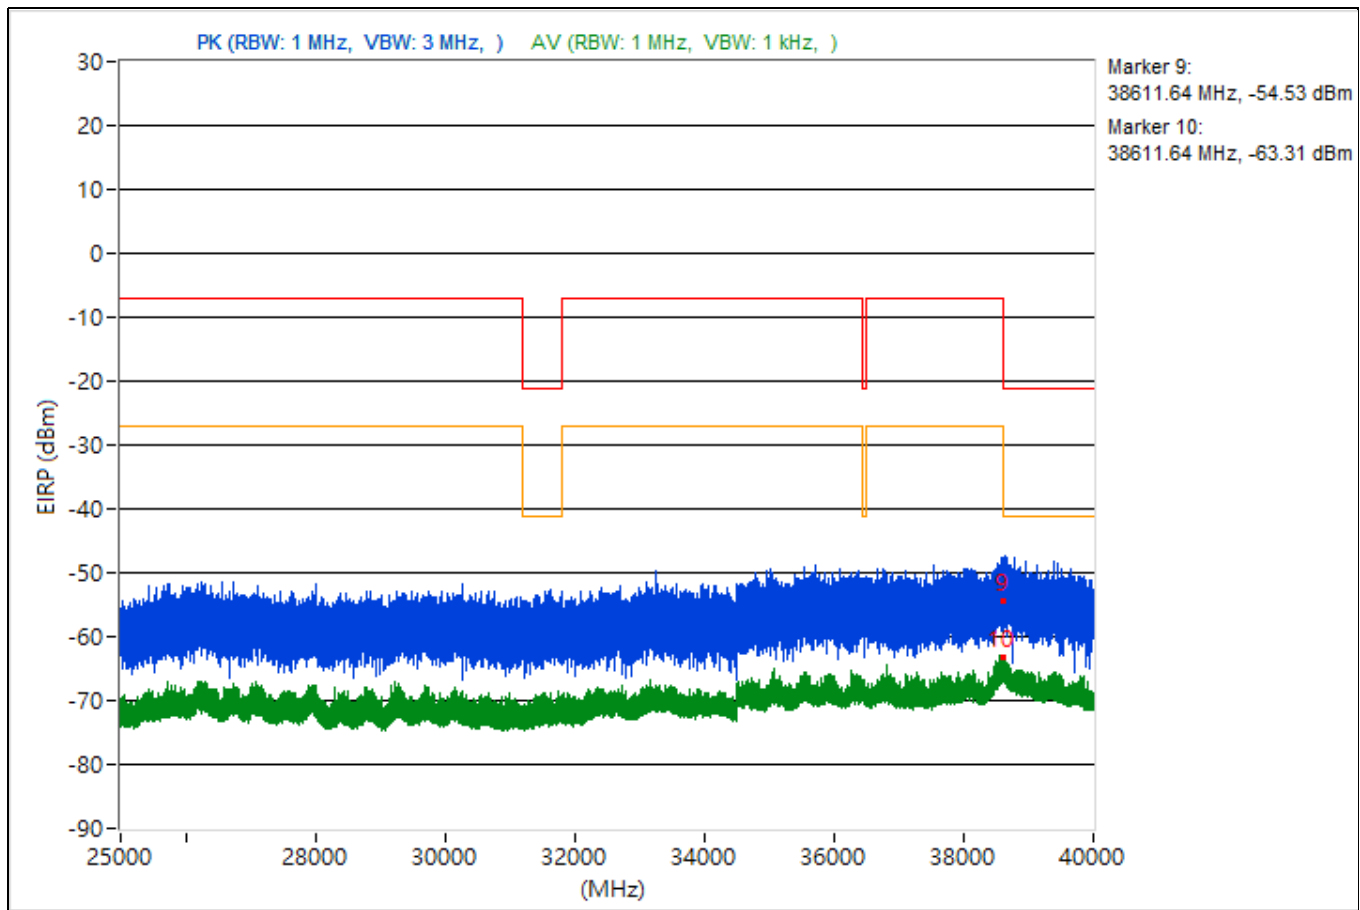


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3728.52	42.78 PK	74	-31.22	-57.4	4.92	-52.48
2	3728.52	35.7 AV	54	-18.3	-64.48	4.92	-59.56
3	11014.58	46.56 PK	74	-27.44	-53.62	4.92	-48.7
4	11014.58	34.98 AV	54	-19.02	-65.2	4.92	-60.28
5	19249.5	45.12 PK	74	-28.88	-55.06	4.92	-50.14
6	19249.5	35.95 AV	54	-18.05	-64.23	4.92	-59.31
7	22362.3	46.63 PK	74	-27.37	-53.55	4.92	-48.63
8	22362.3	36.57 AV	54	-17.43	-63.61	4.92	-58.69
9	38623.11	42.87 PK	74	-31.13	-57.31	4.92	-52.39
10	38623.11	32.13 AV	54	-21.87	-68.05	4.92	-63.13

Note: Margin value = Emission Level - Limit value

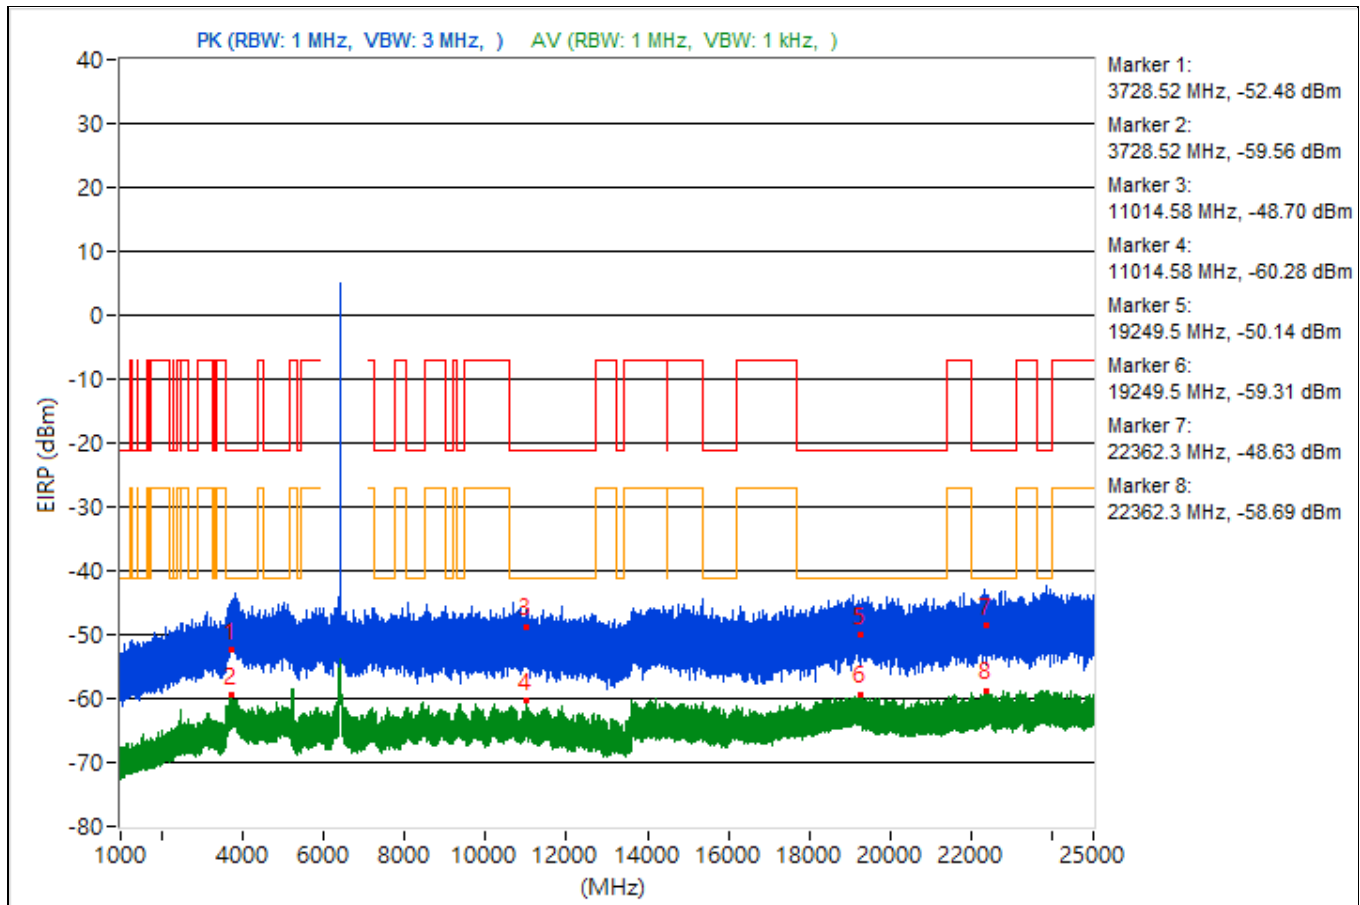


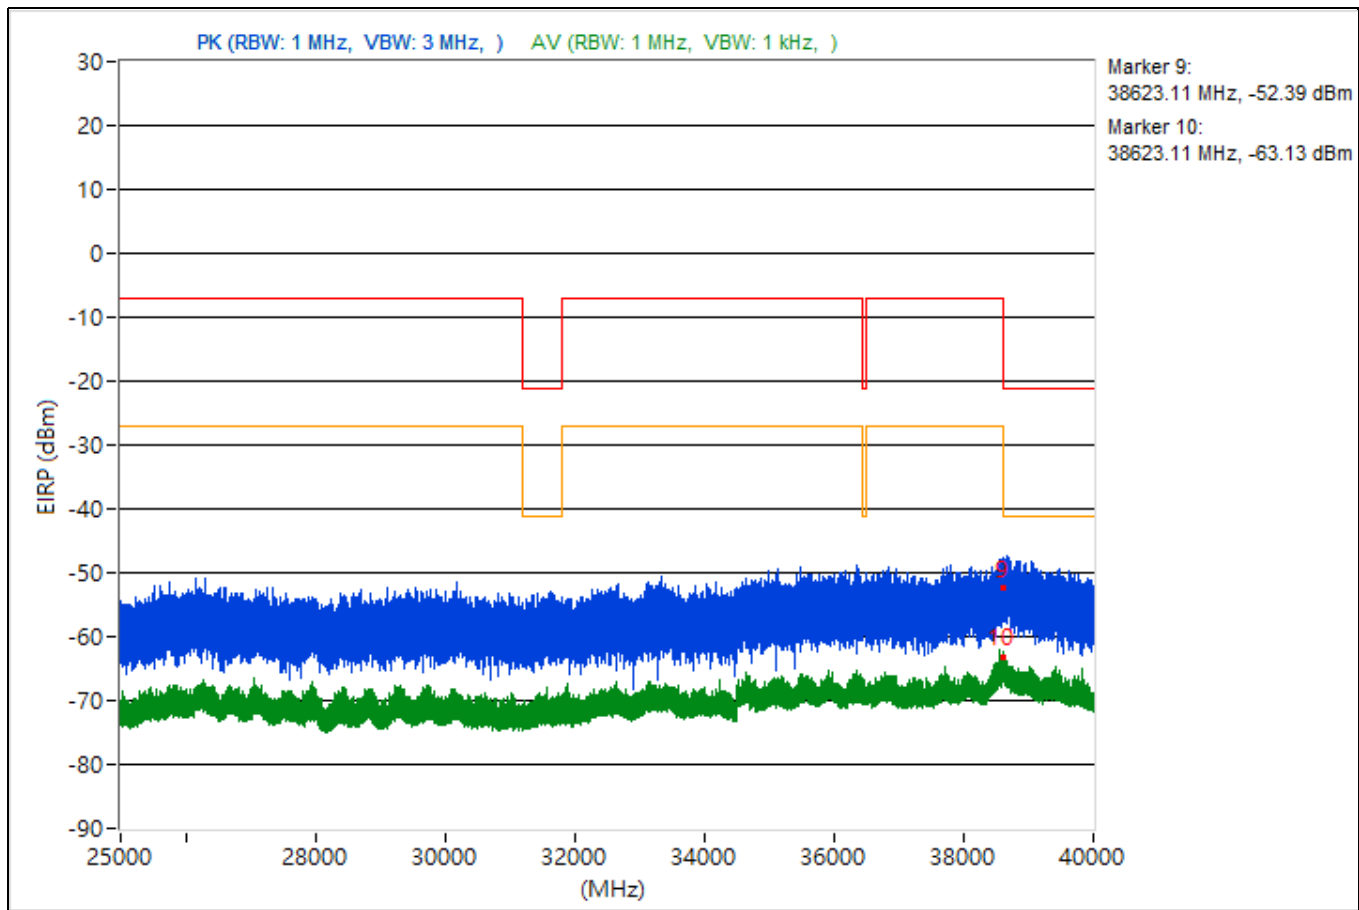


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.46	45.06 PK	74	-28.94	-55.12	4.92	-50.2
2	3813.46	35.78 AV	54	-18.22	-64.4	4.92	-59.48
3	14470.49	42.17 PK	74	-31.83	-58.01	4.92	-53.09
4	14470.49	34.79 AV	54	-19.21	-65.39	4.92	-60.47
5	19284.4	44.74 PK	74	-29.26	-55.44	4.92	-50.52
6	19284.4	35.96 AV	54	-18.04	-64.22	4.92	-59.3
7	22352.7	44.38 PK	74	-29.62	-55.8	4.92	-50.88
8	22352.7	37.04 AV	54	-16.96	-63.14	4.92	-58.22
9	38645.16	42.98 PK	74	-31.02	-57.2	4.92	-52.28
10	38645.16	32.06 AV	54	-21.94	-68.12	4.92	-63.2

Note: Margin value = Emission Level - Limit value

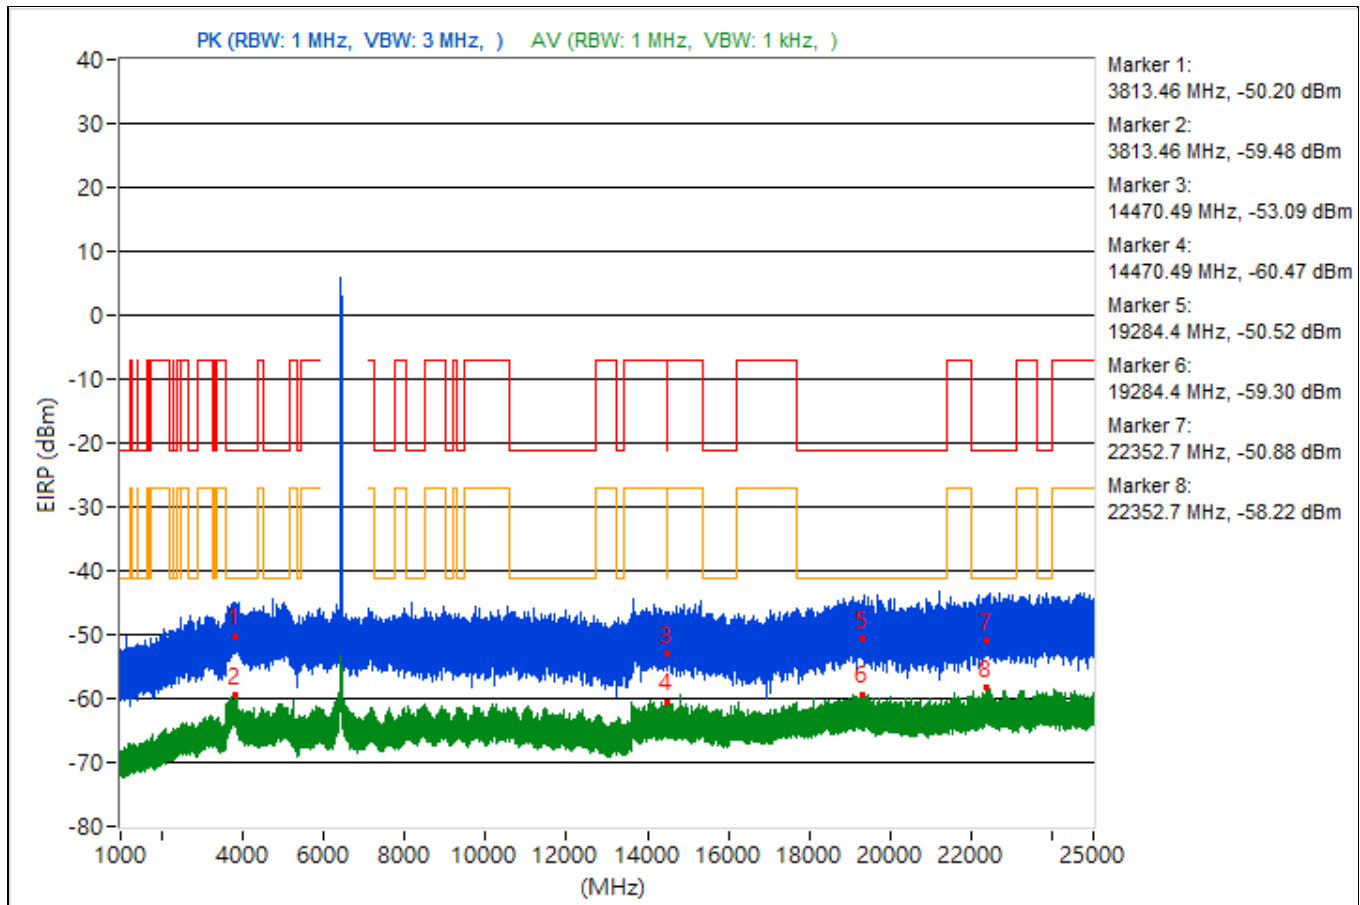


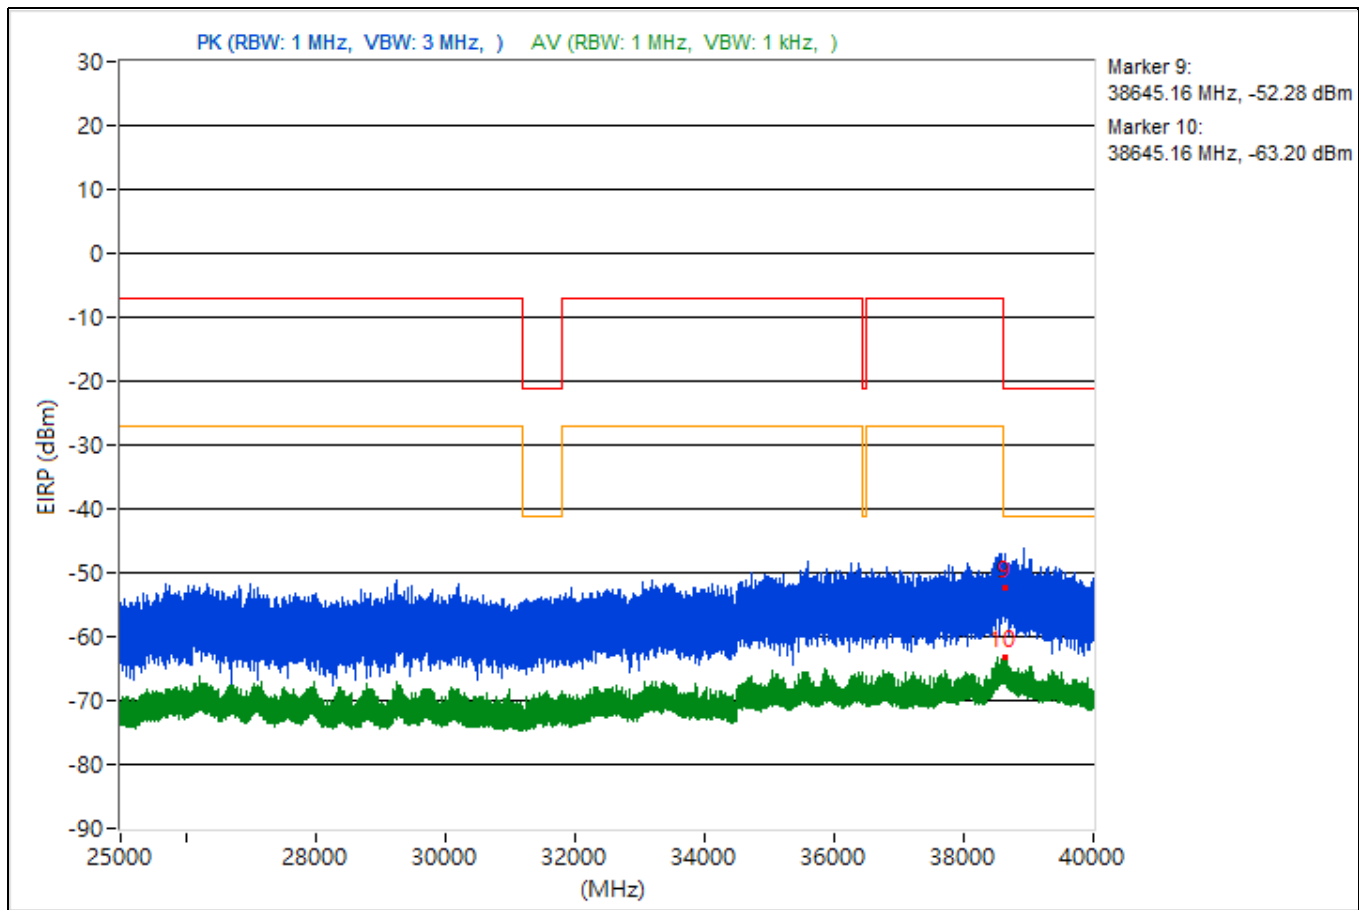


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.24	47.64 PK	74	-26.36	-52.54	4.92	-47.62
2	3822.24	35.47 AV	54	-18.53	-64.71	4.92	-59.79
3	14493.42	40.8 PK	74	-33.2	-59.38	4.92	-54.46
4	14493.42	34.66 AV	54	-19.34	-65.52	4.92	-60.6
5	19161.5	44.94 PK	74	-29.06	-55.24	4.92	-50.32
6	19161.5	36.3 AV	54	-17.7	-63.88	4.92	-58.96
7	22290.3	47.48 PK	74	-26.52	-52.7	4.92	-47.78
8	22290.3	36.81 AV	54	-17.19	-63.37	4.92	-58.45
9	38619.56	40.29 PK	74	-33.71	-59.89	4.92	-54.97
10	38619.56	32.59 AV	54	-21.41	-67.59	4.92	-62.67

Note: Margin value = Emission Level - Limit value

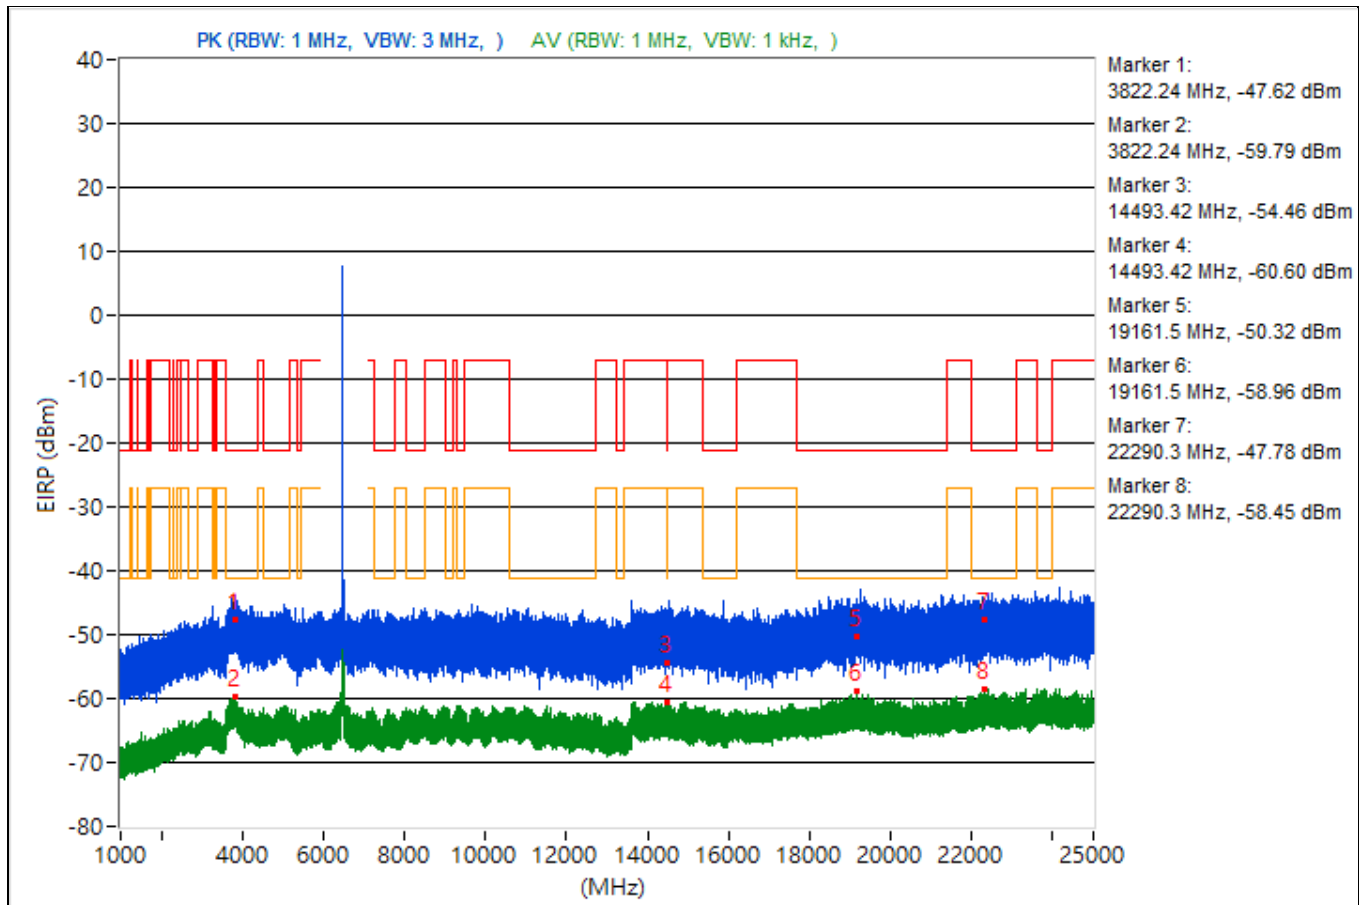


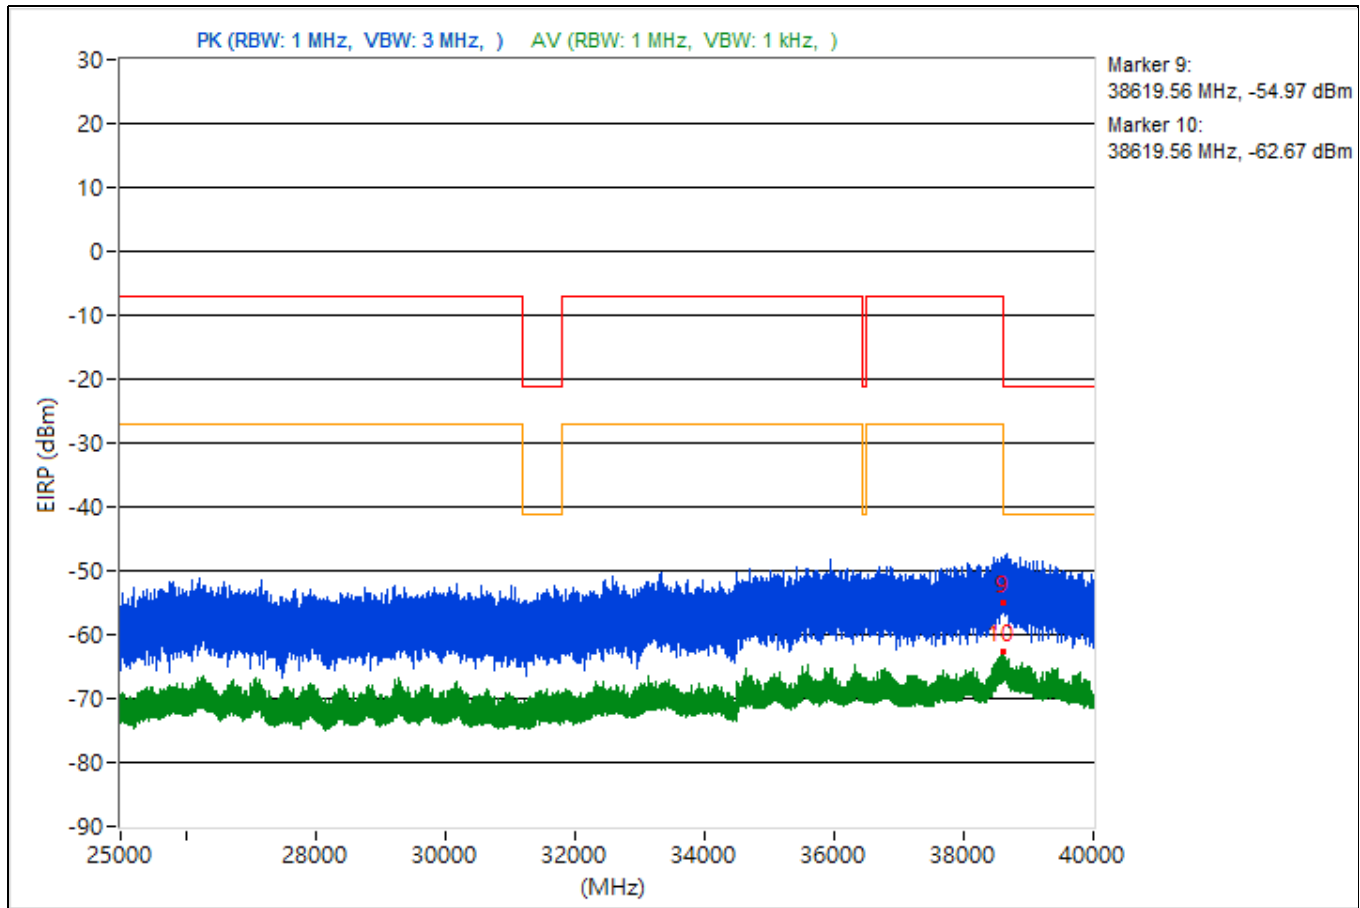


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.19	44.88 PK	74	-29.12	-55.3	4.92	-50.38
2	3782.19	35.63 AV	54	-18.37	-64.55	4.92	-59.63
3	15366.67	42.1 PK	74	-31.9	-58.08	4.92	-53.16
4	15366.67	34.72 AV	54	-19.28	-65.46	4.92	-60.54
5	19405.1	46.84 PK	74	-27.16	-53.34	4.92	-48.42
6	19405.1	36.54 AV	54	-17.46	-63.64	4.92	-58.72
7	23634.2	48.61 PK	74	-25.39	-51.57	4.92	-46.65
8	23634.2	37.22 AV	54	-16.78	-62.96	4.92	-58.04
9	38637.42	44.33 PK	74	-29.67	-55.85	4.92	-50.93
10	38637.42	32.1 AV	54	-21.9	-68.08	4.92	-63.16

Note: Margin value = Emission Level - Limit value

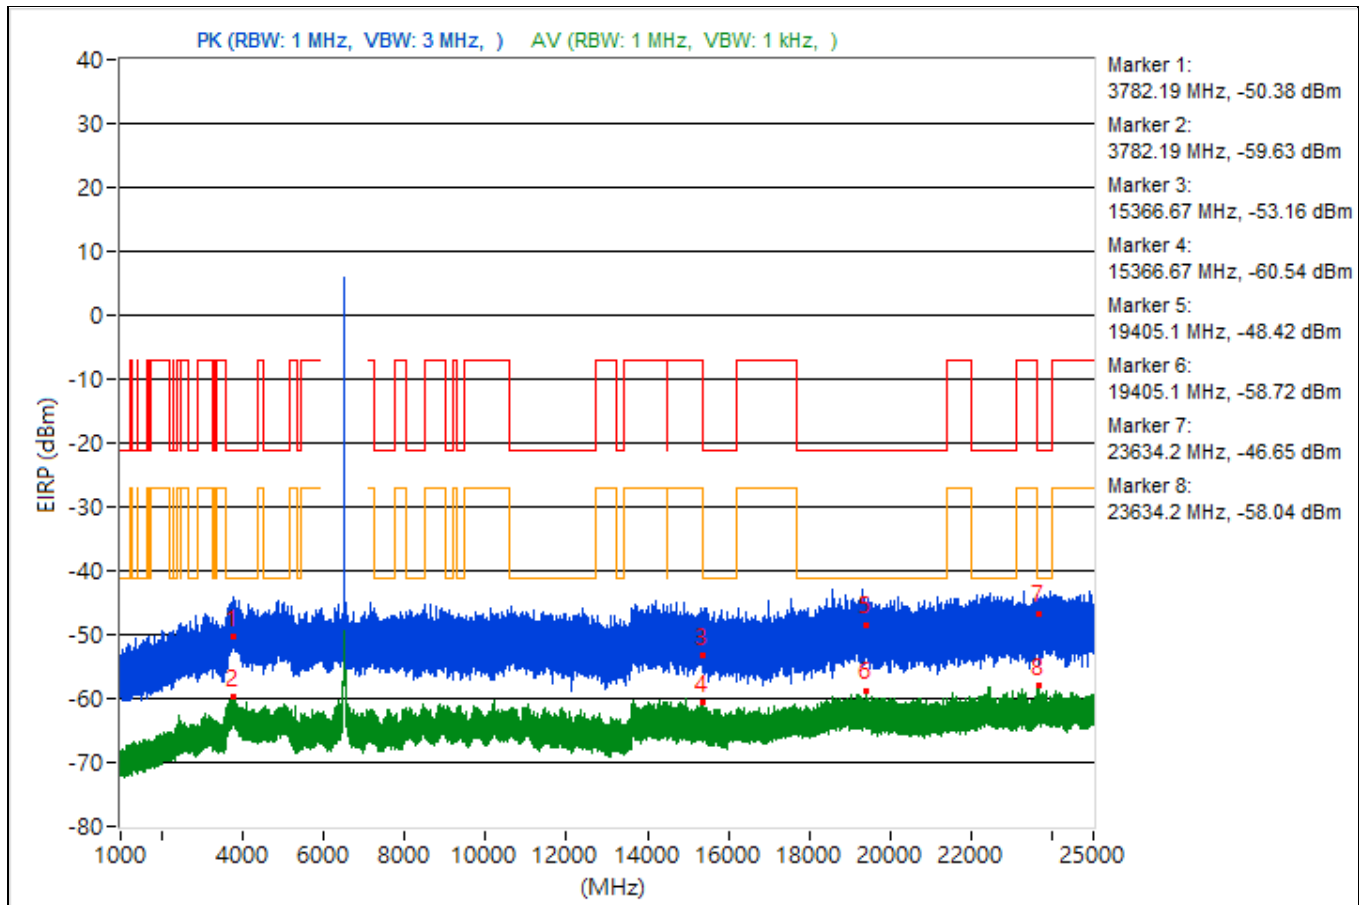


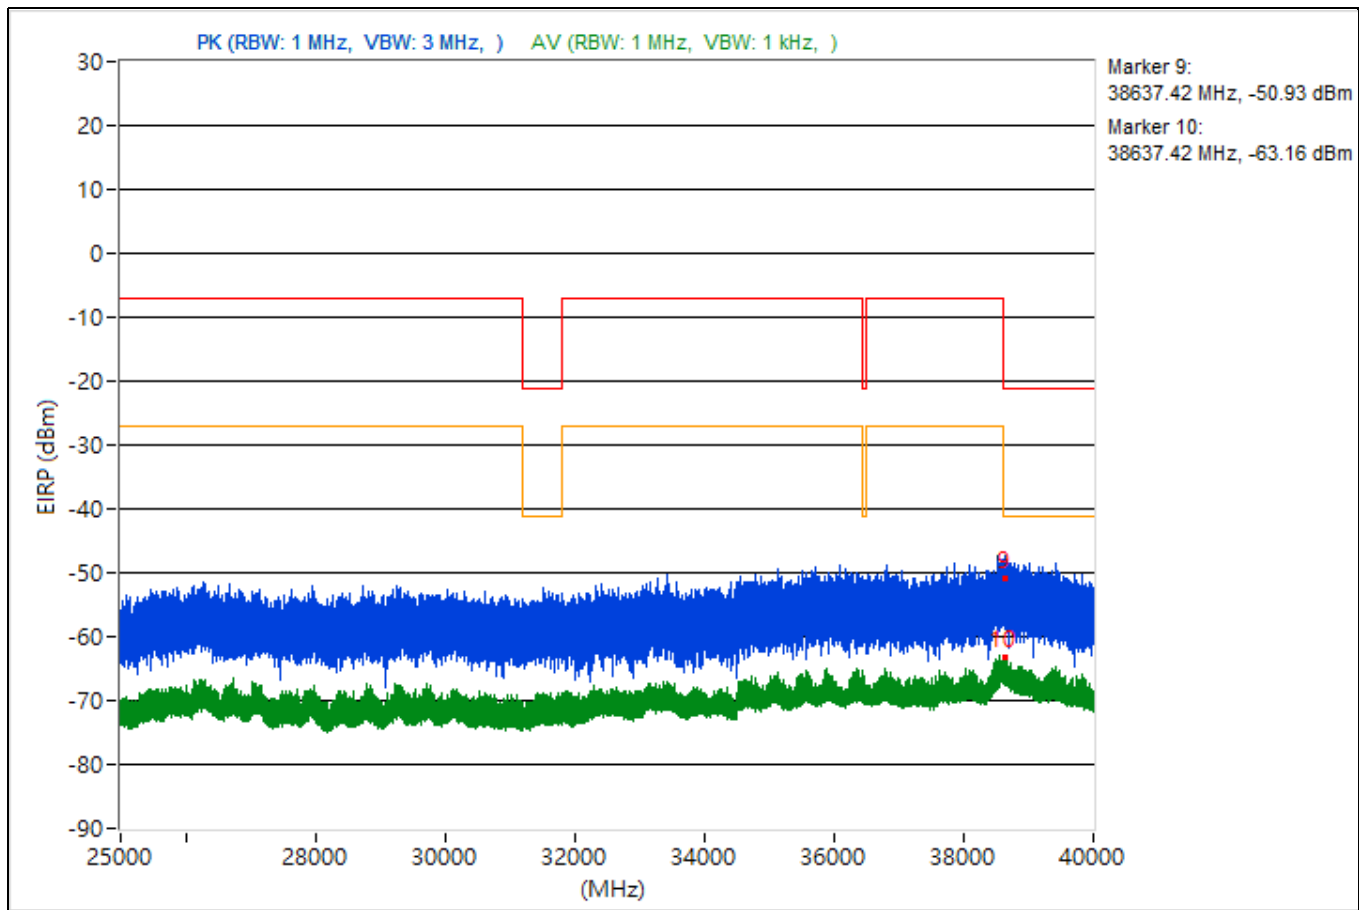


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.5	47.74 PK	74	-26.26	-52.44	4.92	-47.52
2	3782.5	35.31 AV	54	-18.69	-64.87	4.92	-59.95
3	8432.18	45.73 PK	74	-28.27	-54.45	4.92	-49.53
4	8432.18	34.82 AV	54	-19.18	-65.36	4.92	-60.44
5	18900.6	43.51 PK	74	-30.49	-56.67	4.92	-51.75
6	18900.6	36.15 AV	54	-17.85	-64.03	4.92	-59.11
7	23724.3	47.32 PK	74	-26.68	-52.86	4.92	-47.94
8	23724.3	36.89 AV	54	-17.11	-63.29	4.92	-58.37
9	38611.38	41.16 PK	74	-32.84	-59.02	4.92	-54.1
10	38611.38	31.96 AV	54	-22.04	-68.22	4.92	-63.3

Note: Margin value = Emission Level - Limit value

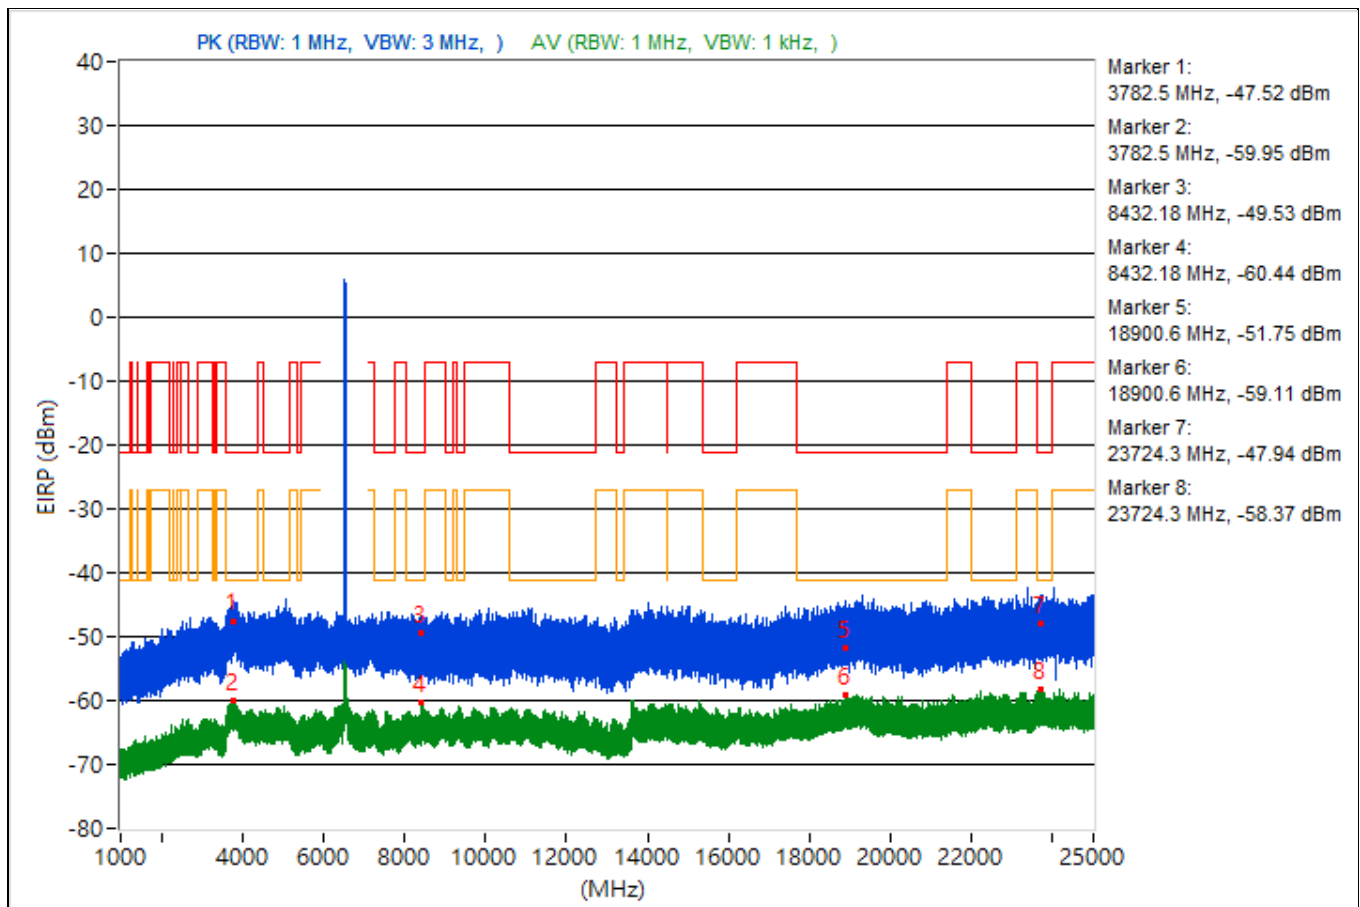


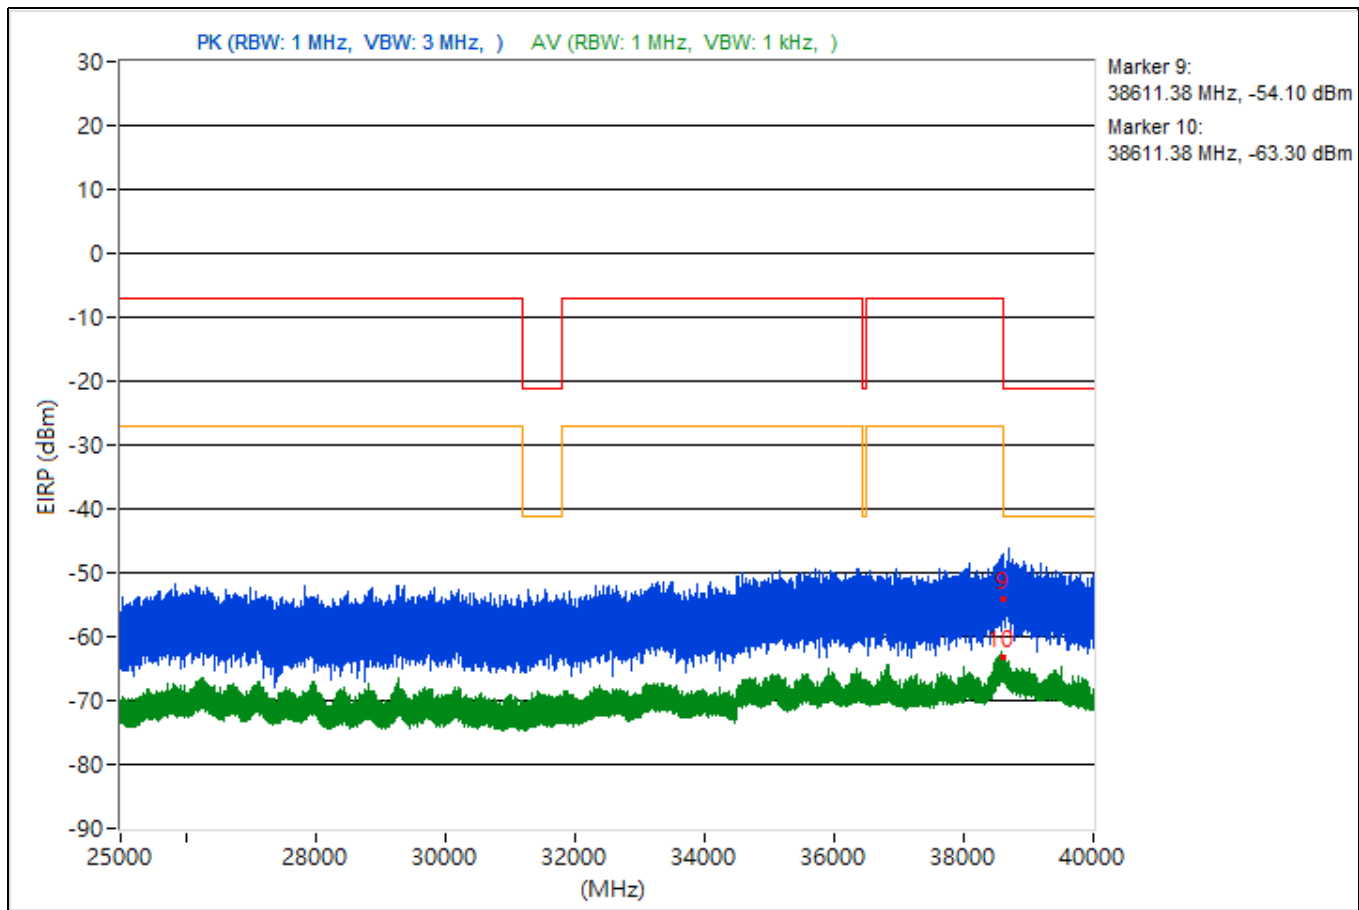


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3713.2	47.7 PK	74	-26.3	-52.48	4.92	-47.56
2	3713.2	35.5 AV	54	-18.5	-64.68	4.92	-59.76
3	8443.91	43.59 PK	74	-30.41	-56.59	4.92	-51.67
4	8443.91	34.96 AV	54	-19.04	-65.22	4.92	-60.3
5	18856.6	48.79 PK	74	-25.21	-51.39	4.92	-46.47
6	18856.6	35.89 AV	54	-18.11	-64.29	4.92	-59.37
7	23763.5	47.37 PK	74	-26.63	-52.81	4.92	-47.89
8	23763.5	36.79 AV	54	-17.21	-63.39	4.92	-58.47
9	38604.89	45.03 PK	74	-28.97	-55.15	4.92	-50.23
10	38604.89	32.72 AV	54	-21.28	-67.46	4.92	-62.54

Note: Margin value = Emission Level - Limit value

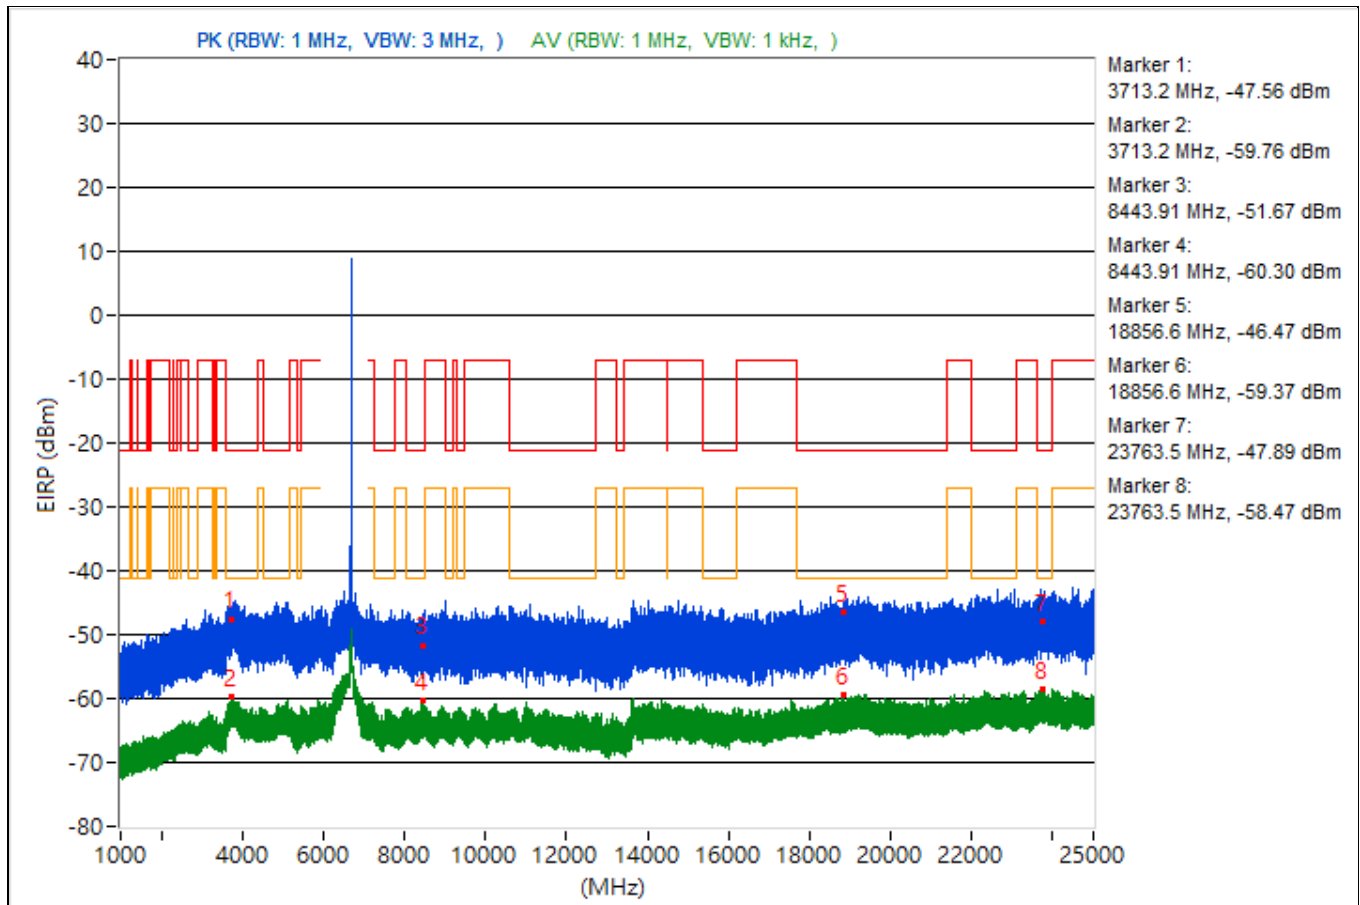


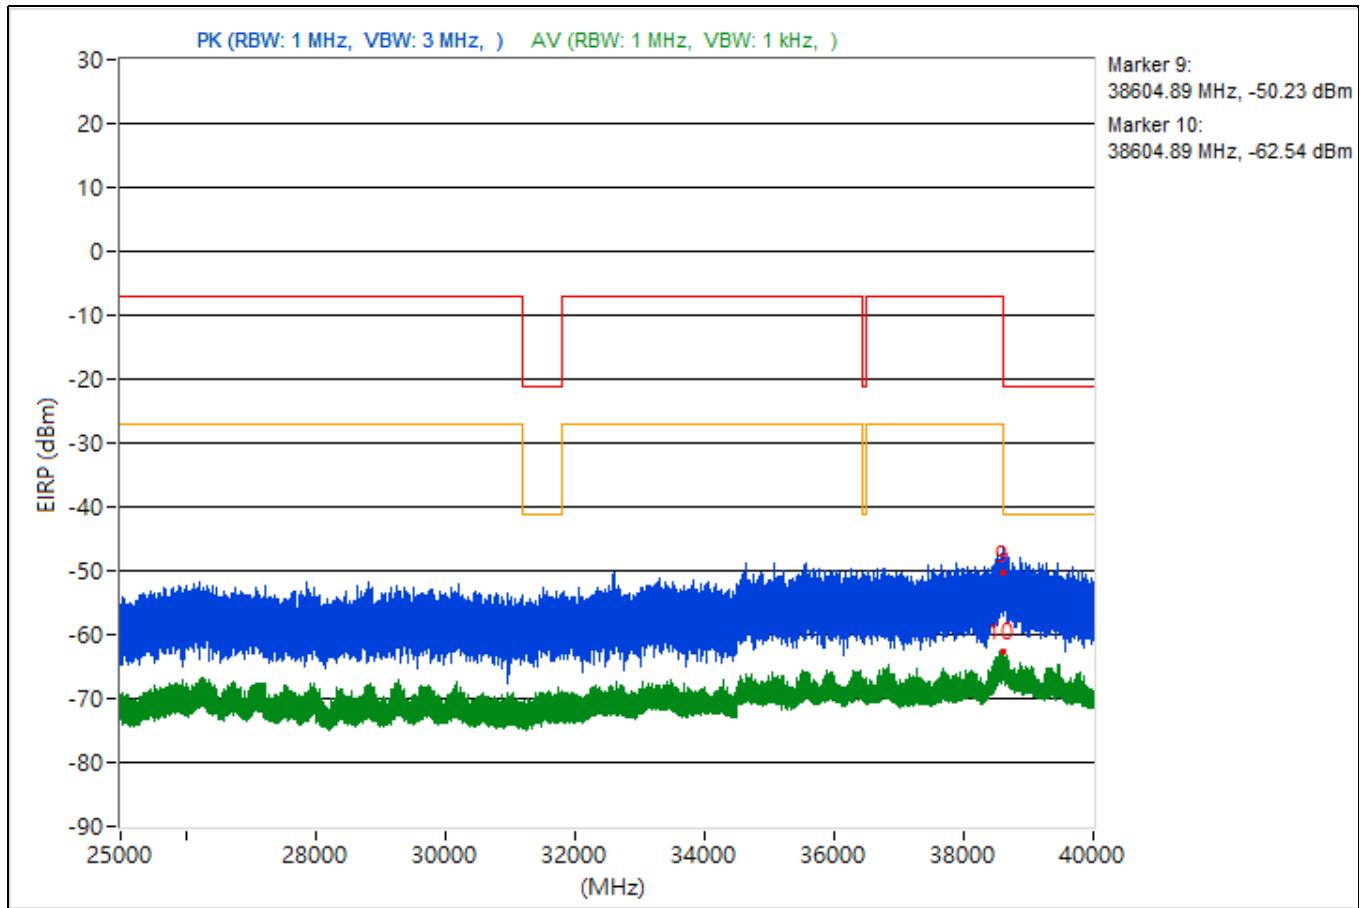


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.14	46.17 PK	74	-27.83	-54.01	4.92	-49.09
2	3806.14	35.67 AV	54	-18.33	-64.51	4.92	-59.59
3	15358.93	41.73 PK	74	-32.27	-58.45	4.92	-53.53
4	15358.93	34.7 AV	54	-19.3	-65.48	4.92	-60.56
5	19319.6	44.75 PK	74	-29.25	-55.43	4.92	-50.51
6	19319.6	35.78 AV	54	-18.22	-64.4	4.92	-59.48
7	23724.8	47.98 PK	74	-26.02	-52.2	4.92	-47.28
8	23724.8	37.67 AV	54	-16.33	-62.51	4.92	-57.59
9	38639.11	43.41 PK	74	-30.59	-56.77	4.92	-51.85
10	38639.11	32.92 AV	54	-21.08	-67.26	4.92	-62.34

Note: Margin value = Emission Level - Limit value

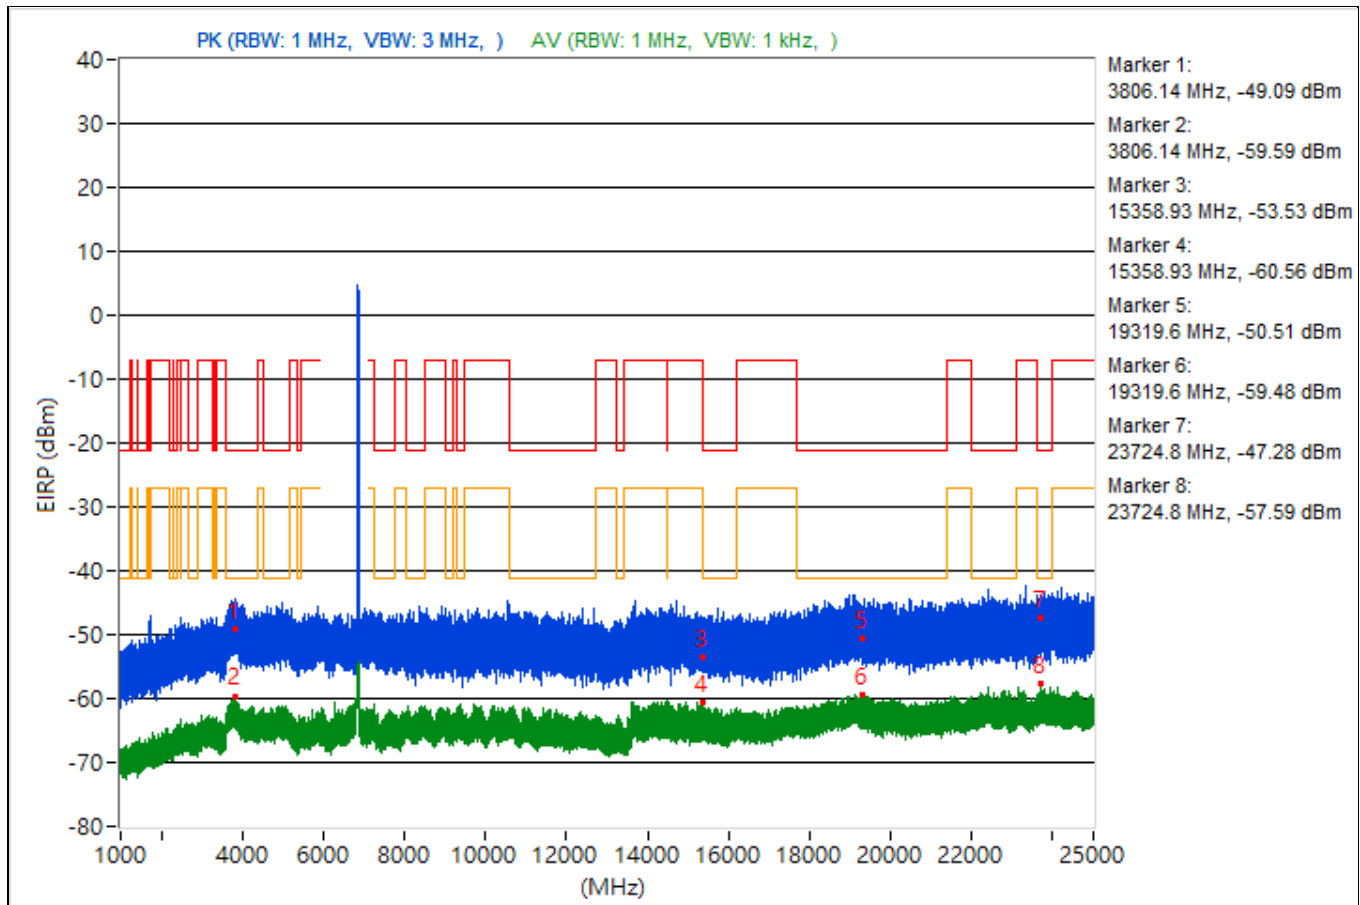


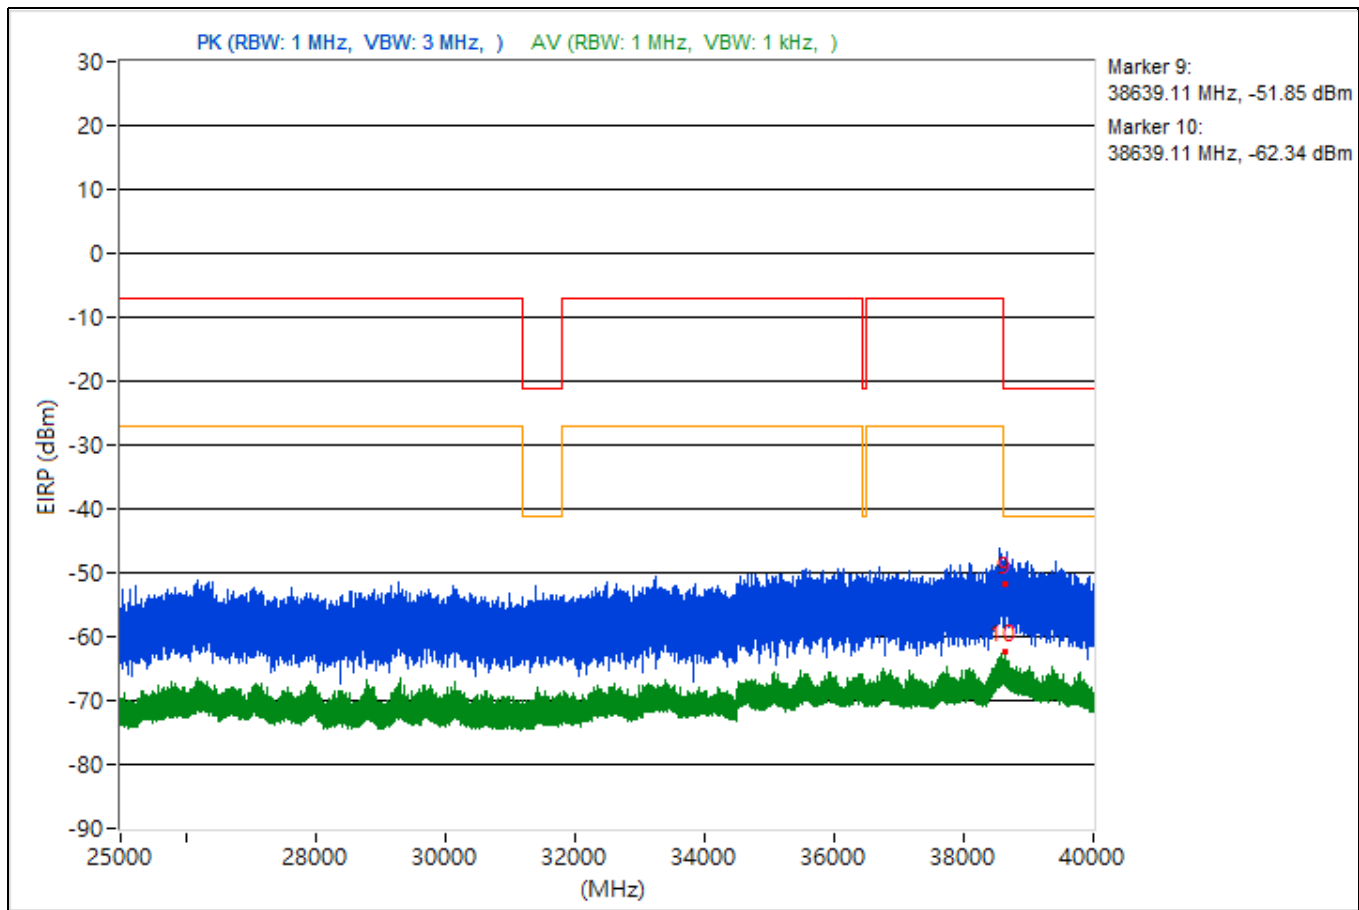


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3717.63	48.13 PK	74	-25.87	-52.05	4.92	-47.13
2	3717.63	35.44 AV	54	-18.56	-64.74	4.92	-59.82
3	11016.09	45.18 PK	74	-28.82	-55	4.92	-50.08
4	11016.09	34.77 AV	54	-19.23	-65.41	4.92	-60.49
5	19333.7	44.91 PK	74	-29.09	-55.27	4.92	-50.35
6	19333.7	36.31 AV	54	-17.69	-63.87	4.92	-58.95
7	23687.3	44.82 PK	74	-29.18	-55.36	4.92	-50.44
8	23687.3	37.17 AV	54	-16.83	-63.01	4.92	-58.09
9	38606.31	44.38 PK	74	-29.62	-55.8	4.92	-50.88
10	38606.31	32.29 AV	54	-21.71	-67.89	4.92	-62.97

Note: Margin value = Emission Level - Limit value

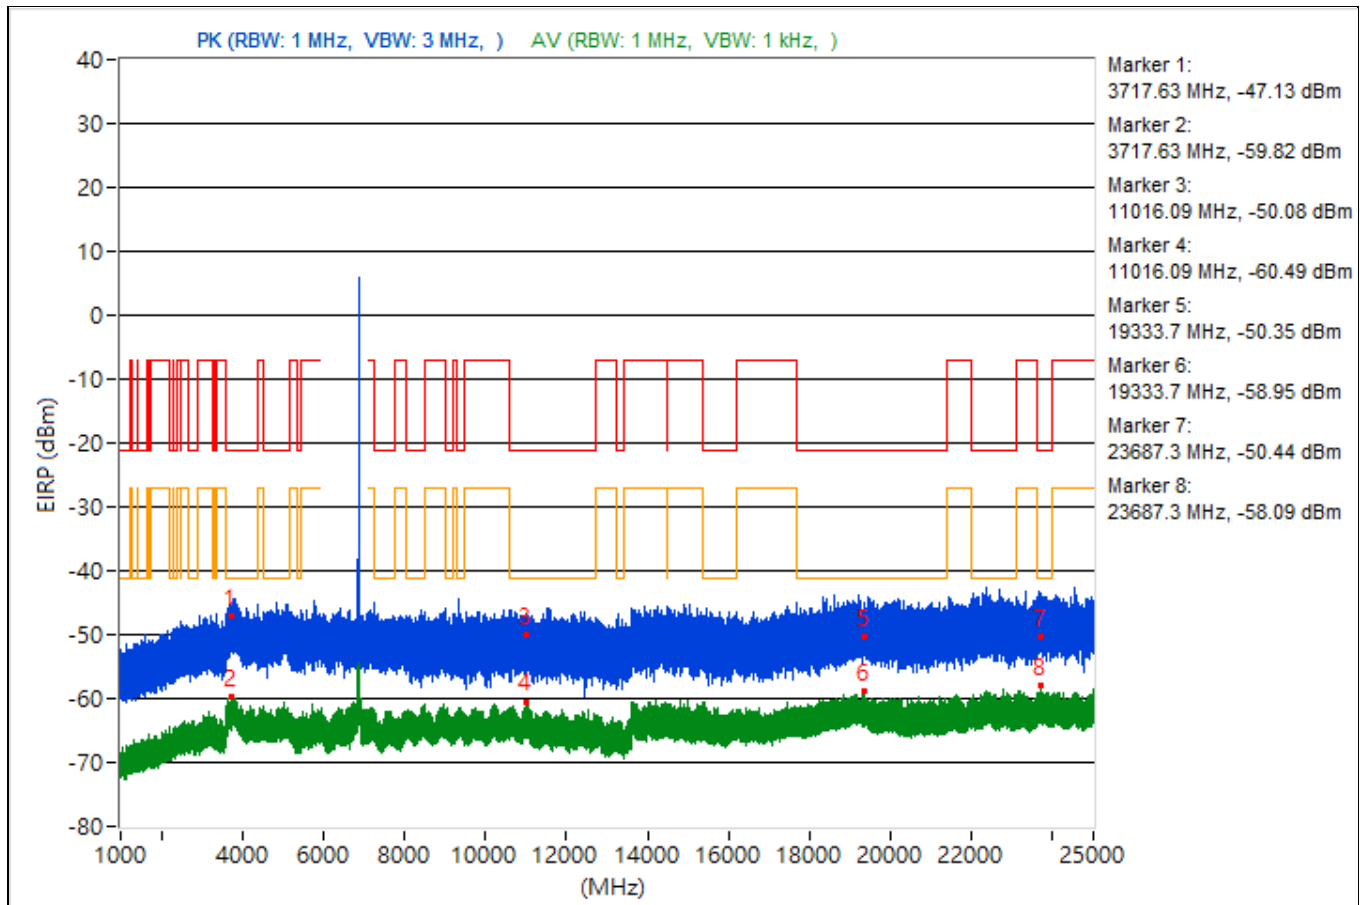


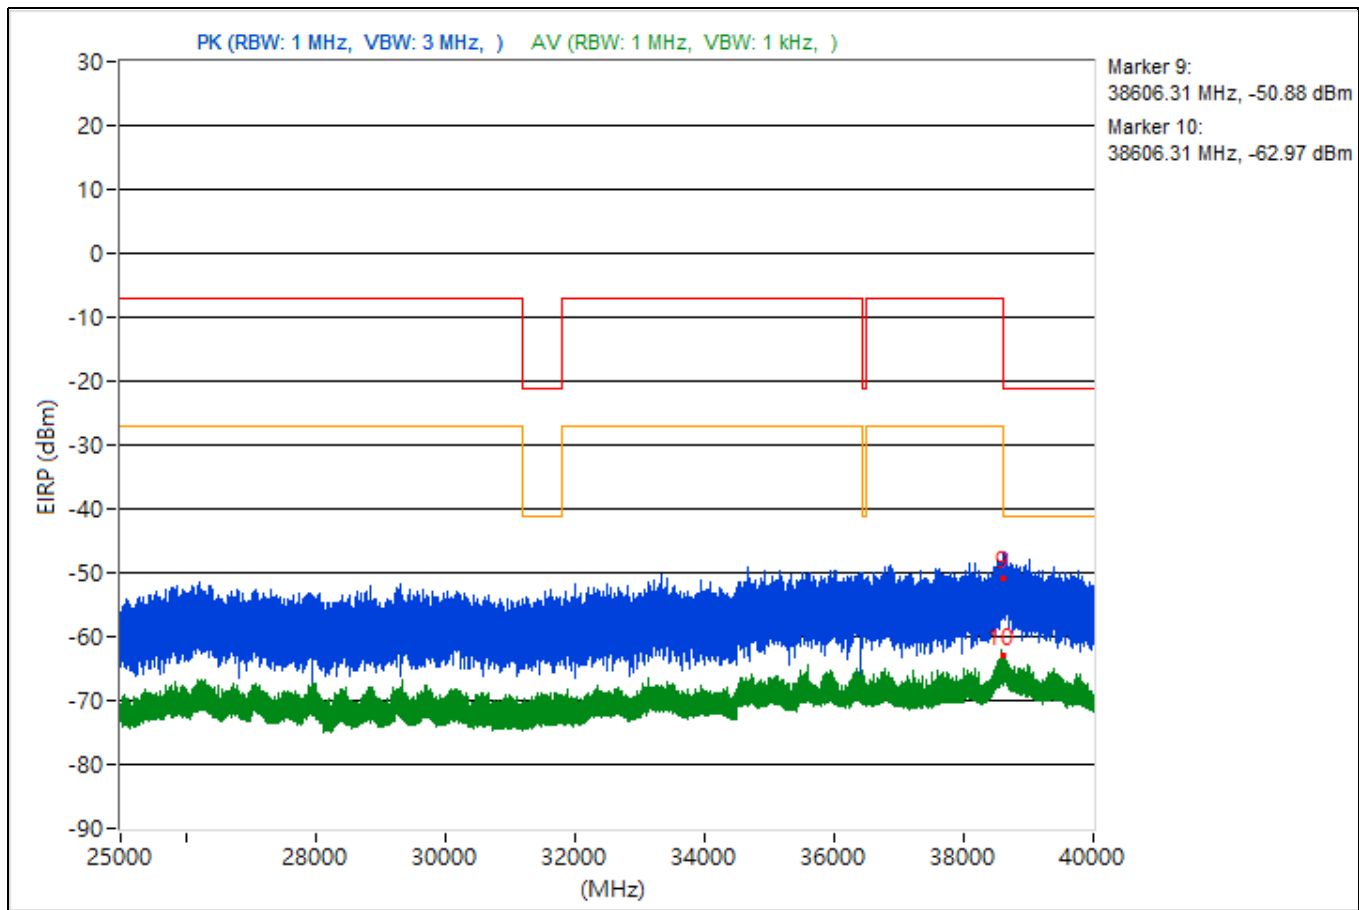


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.06	42.78 PK	74	-31.22	-57.4	4.92	-52.48
2	3805.06	35.51 AV	54	-18.49	-64.67	4.92	-59.75
3	14489.6	46.43 PK	74	-27.57	-53.75	4.92	-48.83
4	14489.6	34.93 AV	54	-19.07	-65.25	4.92	-60.33
5	18972	44.49 PK	74	-29.51	-55.69	4.92	-50.77
6	18972	36.27 AV	54	-17.73	-63.91	4.92	-58.99
7	23720	48.5 PK	74	-25.5	-51.68	4.92	-46.76
8	23720	37.03 AV	54	-16.97	-63.15	4.92	-58.23
9	38619.64	44.86 PK	74	-29.14	-55.32	4.92	-50.4
10	38619.64	32.33 AV	54	-21.67	-67.85	4.92	-62.93

Note: Margin value = Emission Level - Limit value

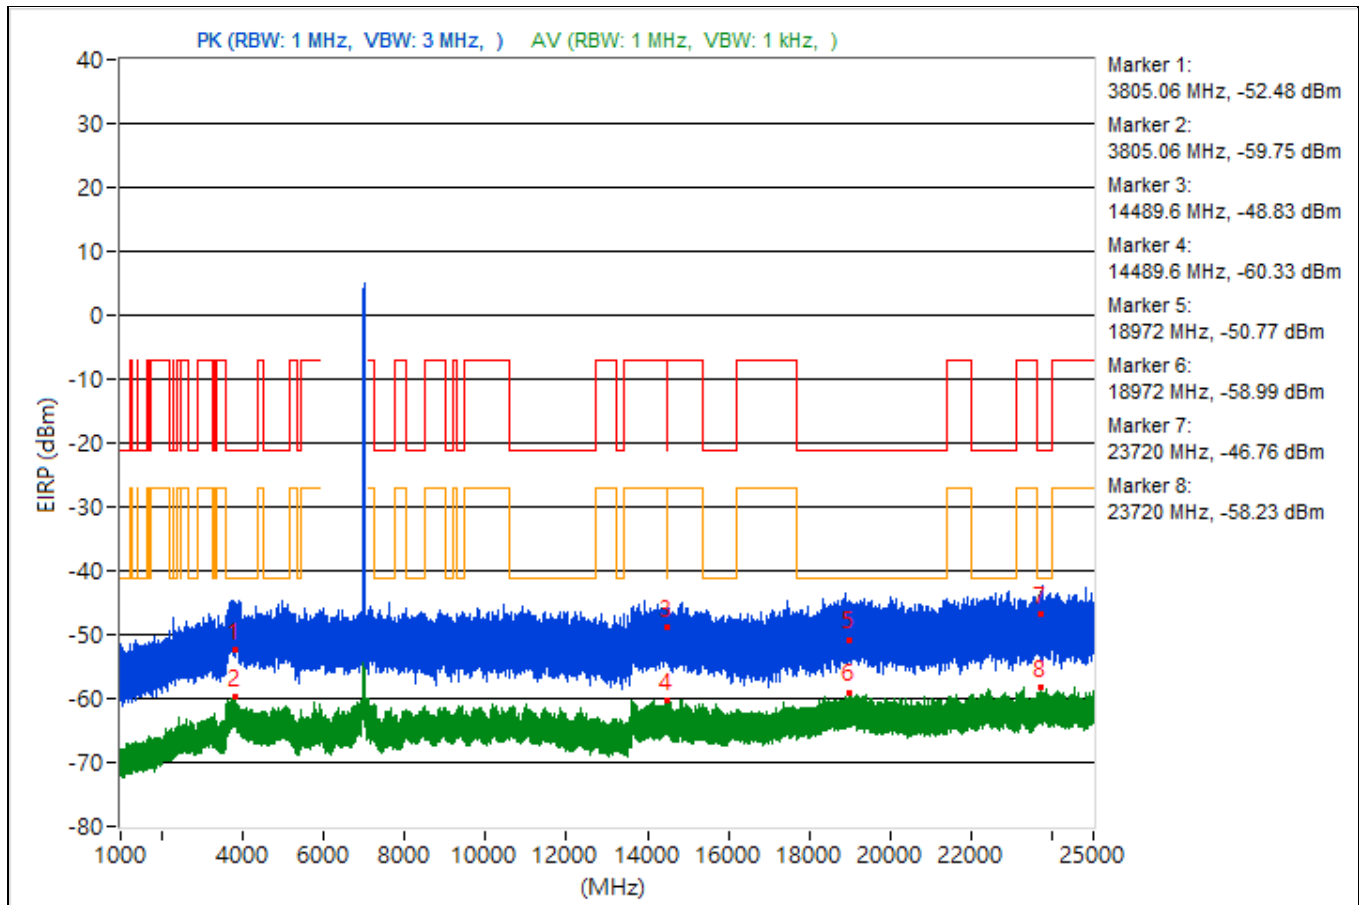


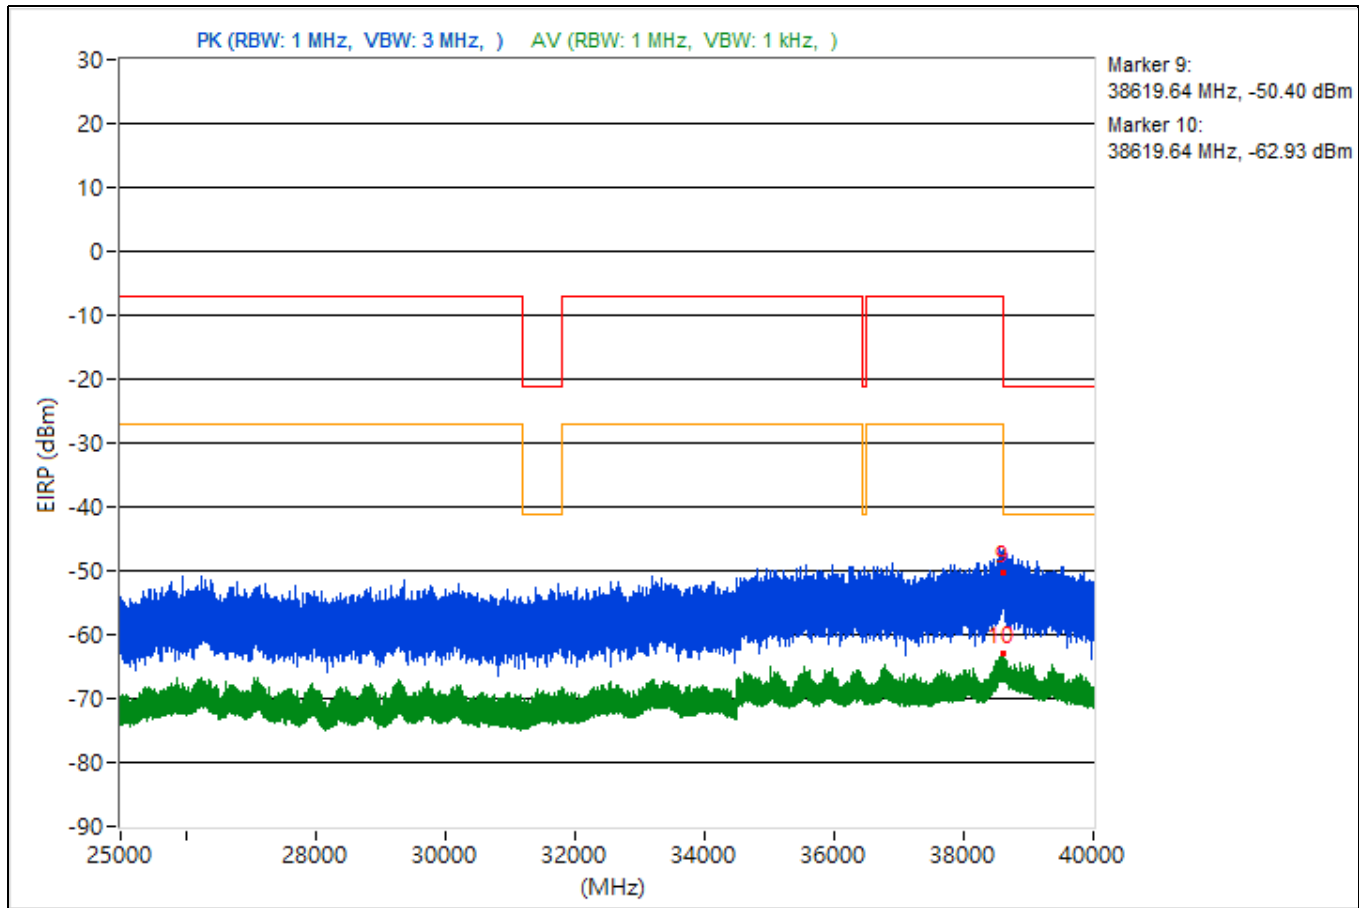


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3728.13	45 PK	74	-29	-55.18	4.92	-50.26
2	3728.13	35.74 AV	54	-18.26	-64.44	4.92	-59.52
3	14473.6	47.08 PK	74	-26.92	-53.1	4.92	-48.18
4	14473.6	34.89 AV	54	-19.11	-65.29	4.92	-60.37
5	19271.6	47.31 PK	74	-26.69	-52.87	4.92	-47.95
6	19271.6	36.19 AV	54	-17.81	-63.99	4.92	-59.07
7	22812.8	47.65 PK	74	-26.35	-52.53	4.92	-47.61
8	22812.8	37.12 AV	54	-16.88	-63.06	4.92	-58.14
9	38611.29	44.79 PK	74	-29.21	-55.39	4.92	-50.47
10	38611.29	32.36 AV	54	-21.64	-67.82	4.92	-62.9

Note: Margin value = Emission Level - Limit value

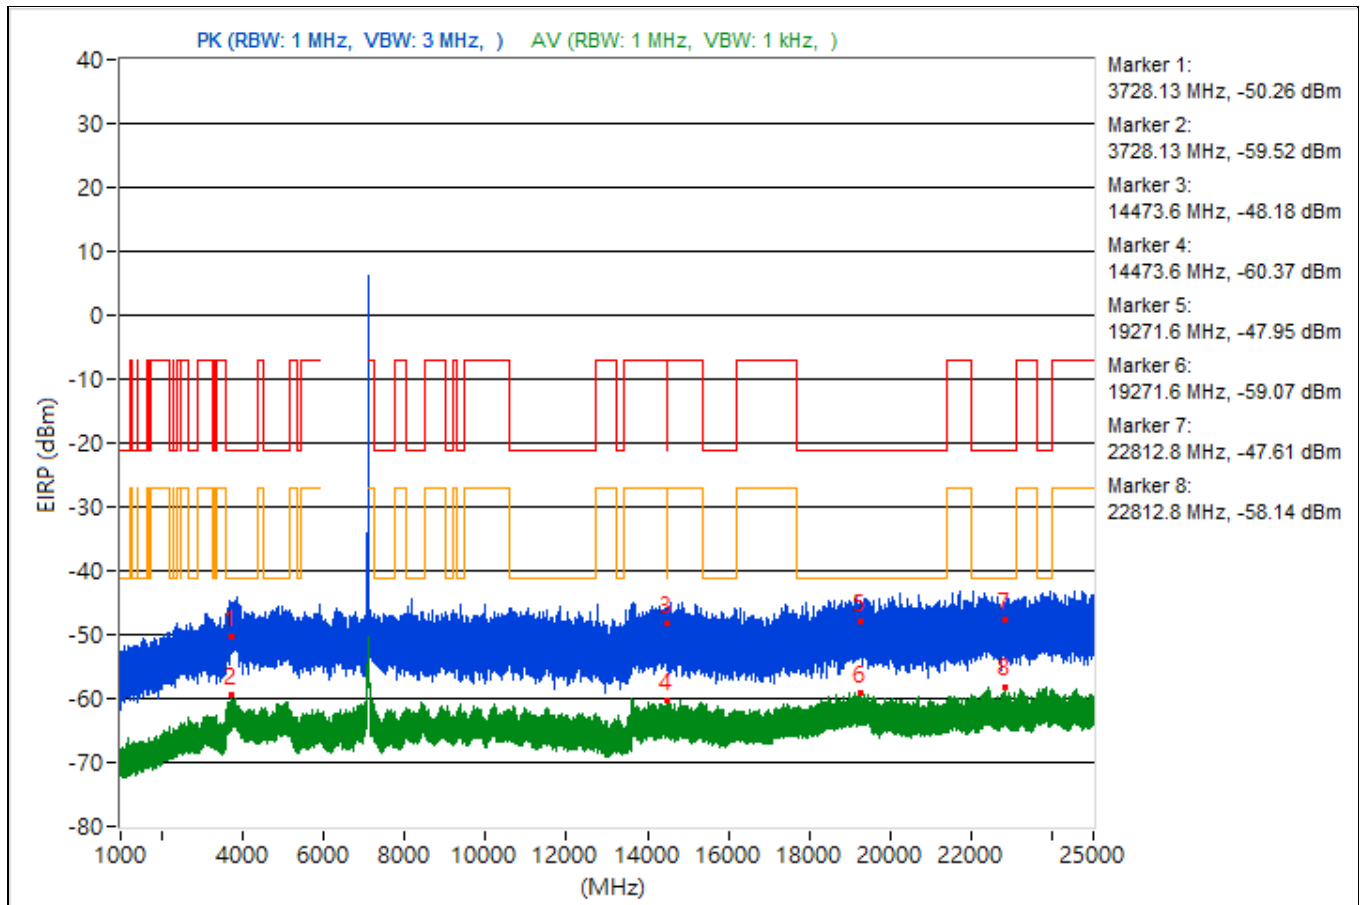


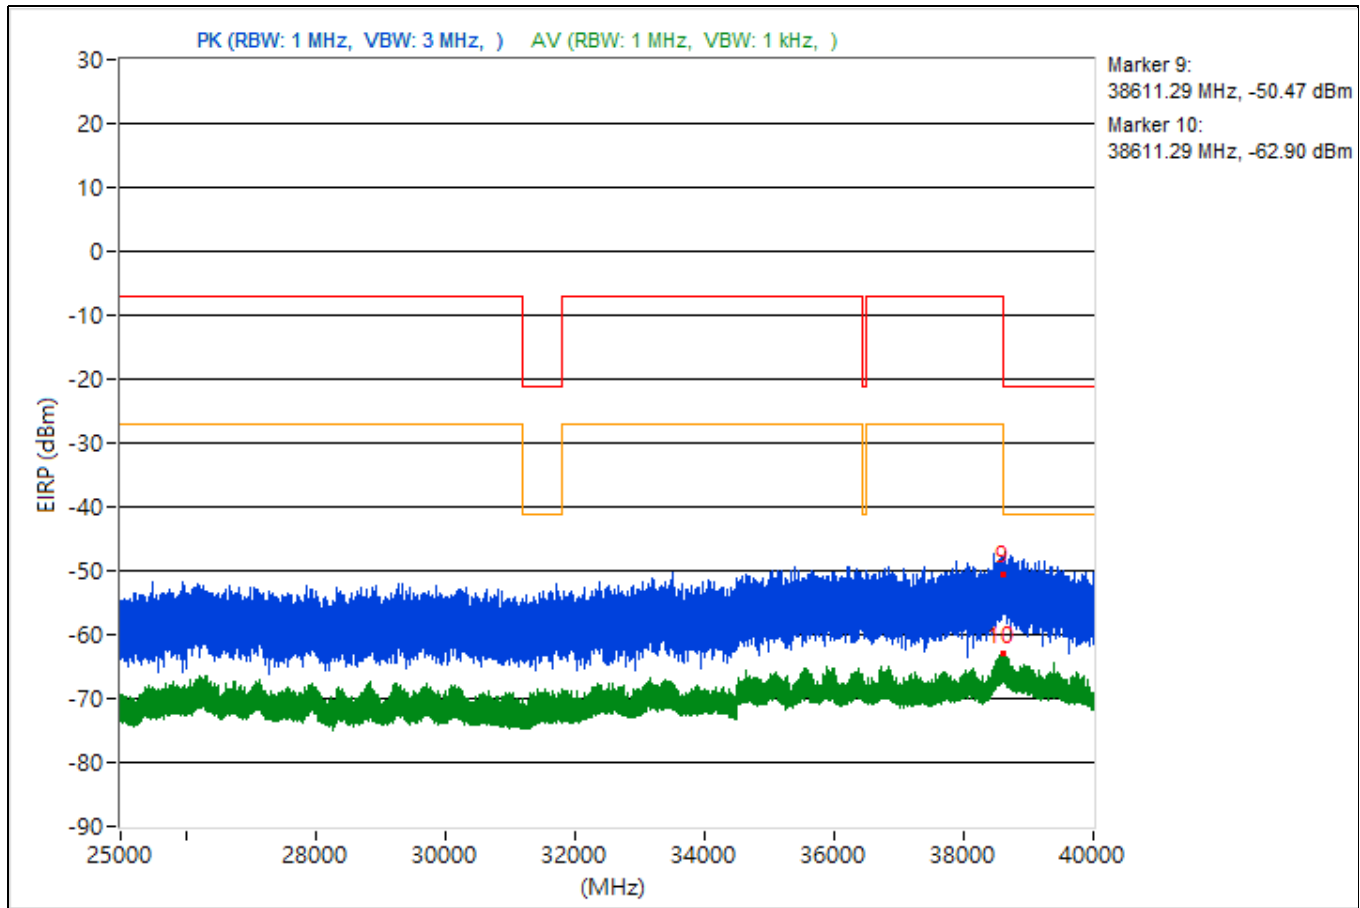


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3715.92	48.11 PK	74	-25.89	-52.07	4.92	-47.15
2	3715.92	35.54 AV	54	-18.46	-64.64	4.92	-59.72
3	9389.33	42.89 PK	74	-31.11	-57.29	4.92	-52.37
4	9389.33	34.7 AV	54	-19.3	-65.48	4.92	-60.56
5	19172.7	46.2 PK	74	-27.8	-53.98	4.92	-49.06
6	19172.7	35.97 AV	54	-18.03	-64.21	4.92	-59.29
7	23827.9	47.7 PK	74	-26.3	-52.48	4.92	-47.56
8	23827.9	36.35 AV	54	-17.65	-63.83	4.92	-58.91
9	38623.91	41.15 PK	74	-32.85	-59.03	4.92	-54.11
10	38623.91	32.76 AV	54	-21.24	-67.42	4.92	-62.5

Note: Margin value = Emission Level - Limit value

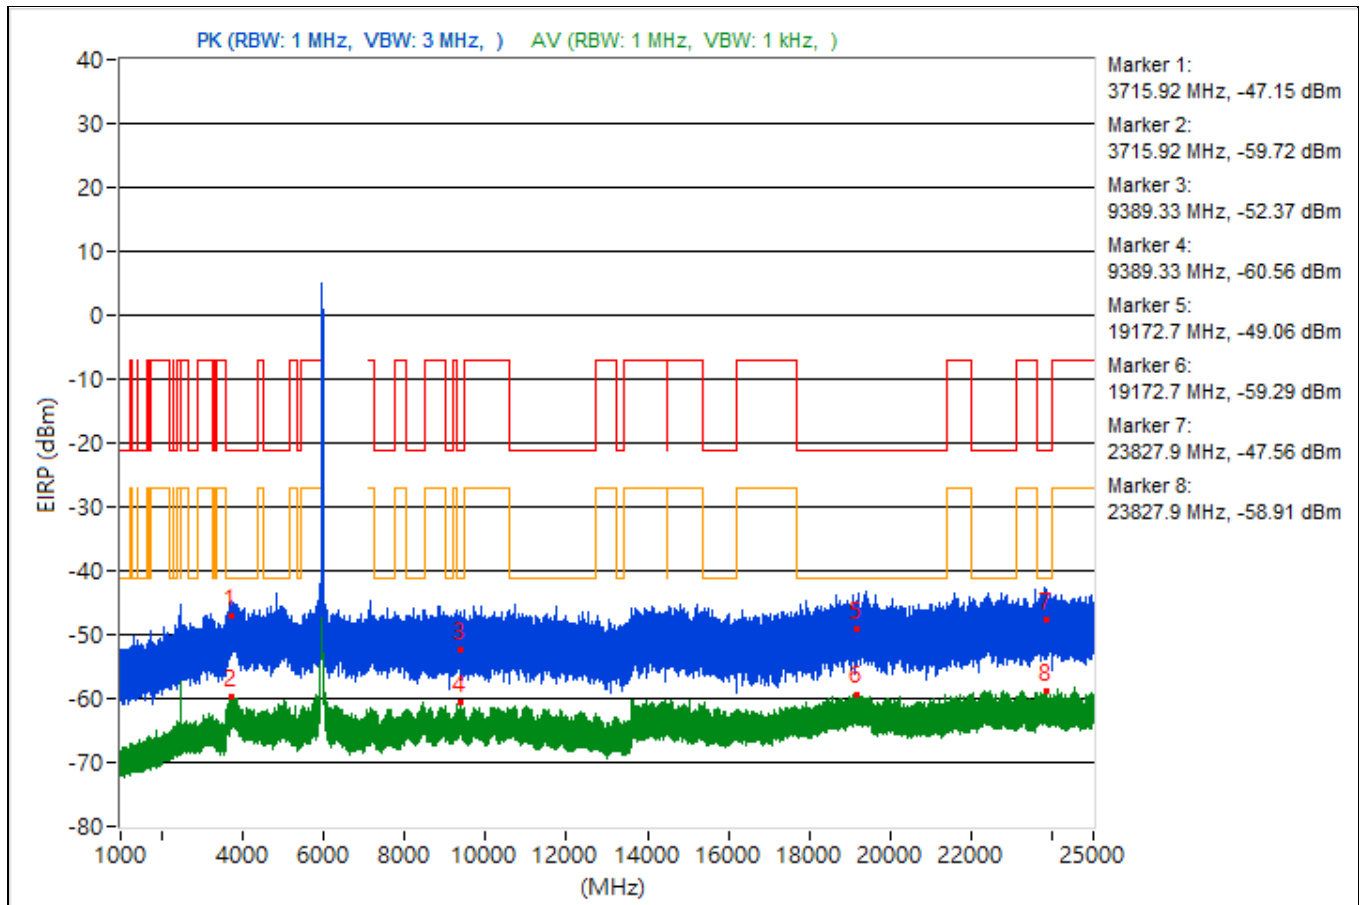


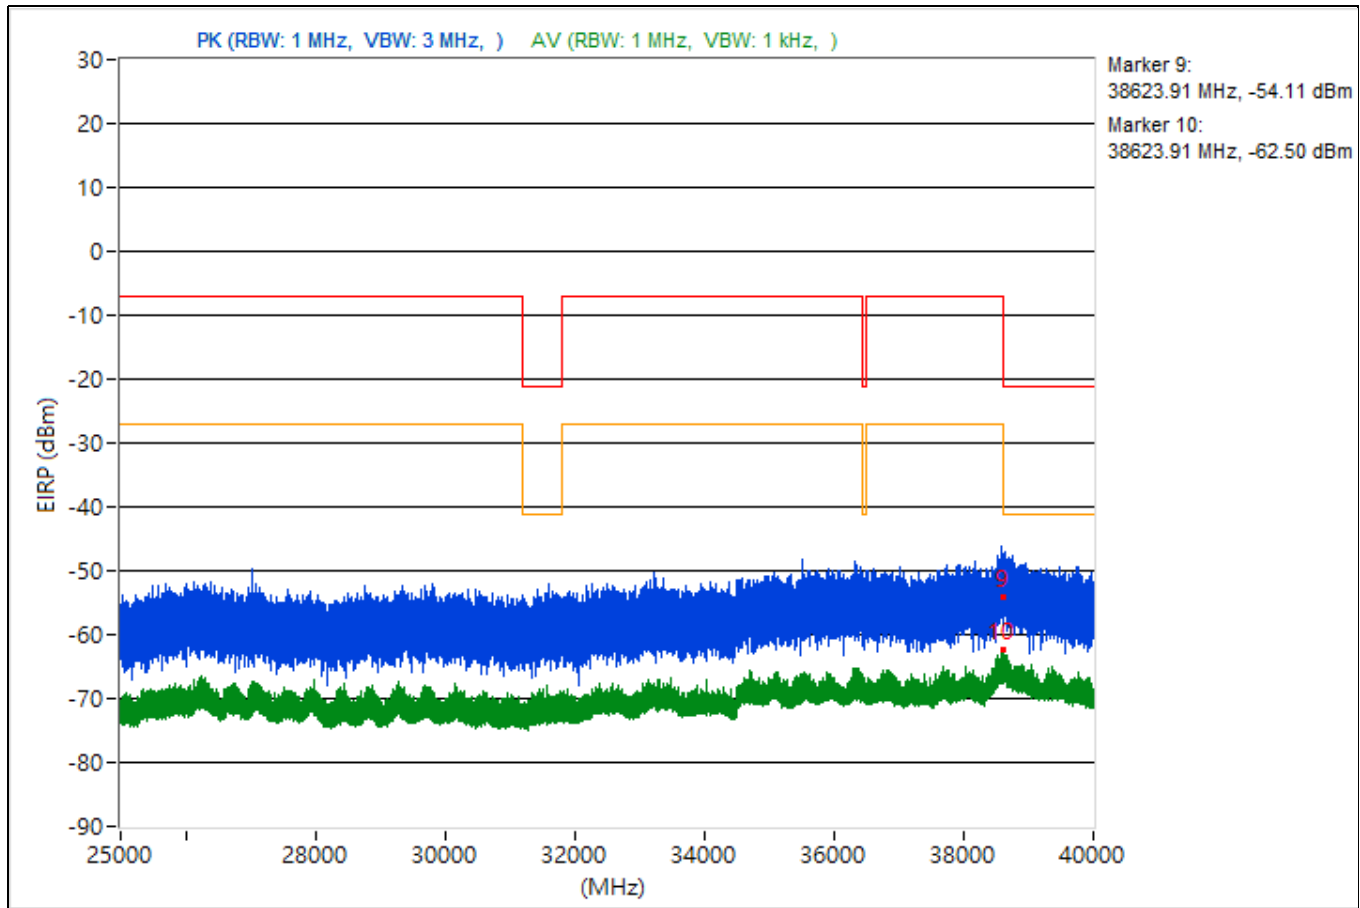


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.08	46.74 PK	74	-27.26	-53.44	4.92	-48.52
2	3842.08	35.37 AV	54	-18.63	-64.81	4.92	-59.89
3	10692.09	43.08 PK	74	-30.92	-57.1	4.92	-52.18
4	10692.09	34.63 AV	54	-19.37	-65.55	4.92	-60.63
5	19171.1	47.45 PK	74	-26.55	-52.73	4.92	-47.81
6	19171.1	36.32 AV	54	-17.68	-63.86	4.92	-58.94
7	22100.4	47.35 PK	74	-26.65	-52.83	4.92	-47.91
8	22100.4	36.71 AV	54	-17.29	-63.47	4.92	-58.55
9	38629.42	44.62 PK	74	-29.38	-55.56	4.92	-50.64
10	38629.42	32.27 AV	54	-21.73	-67.91	4.92	-62.99

Note: Margin value = Emission Level - Limit value

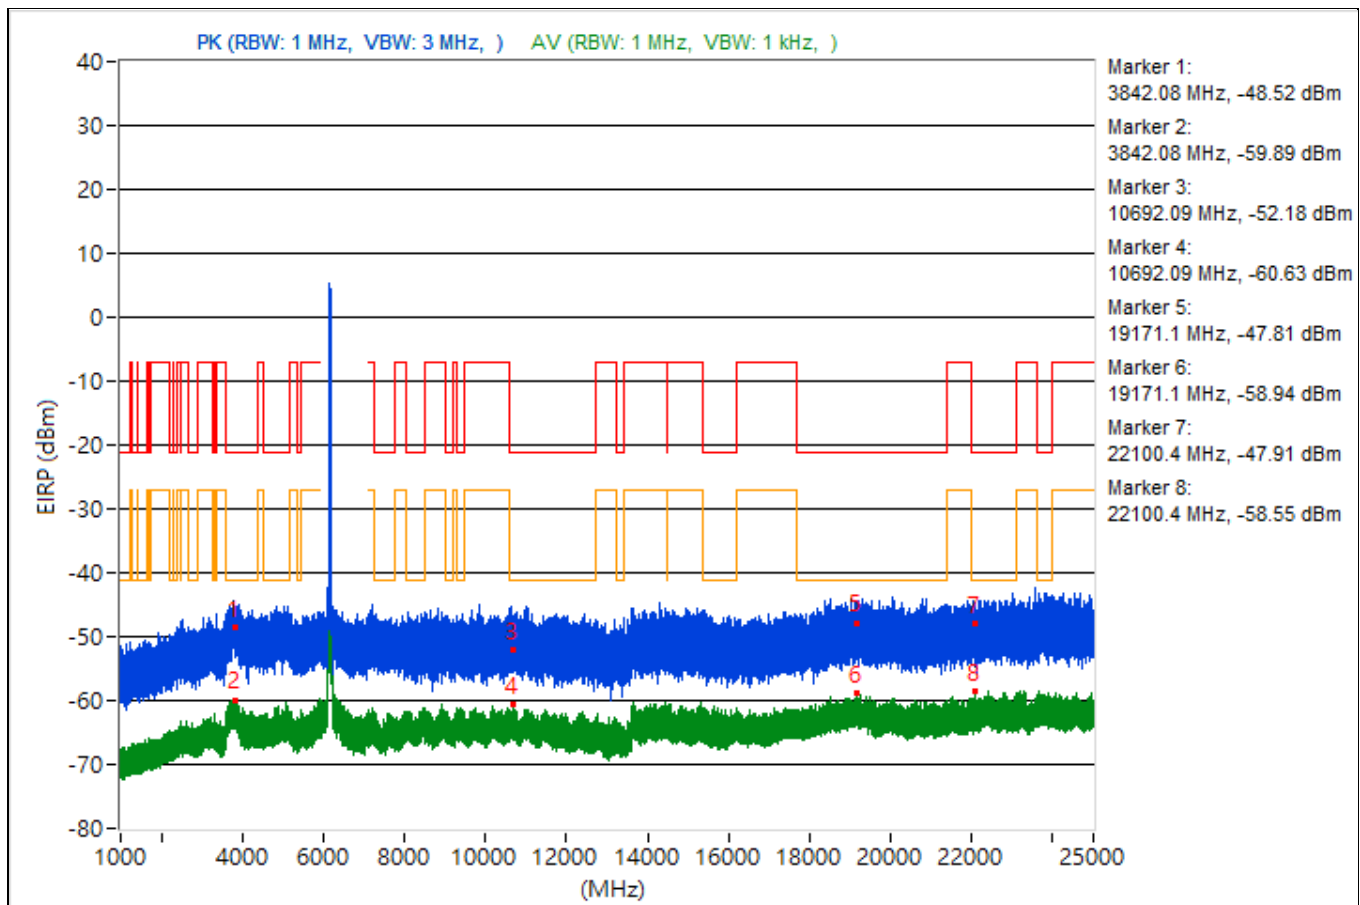


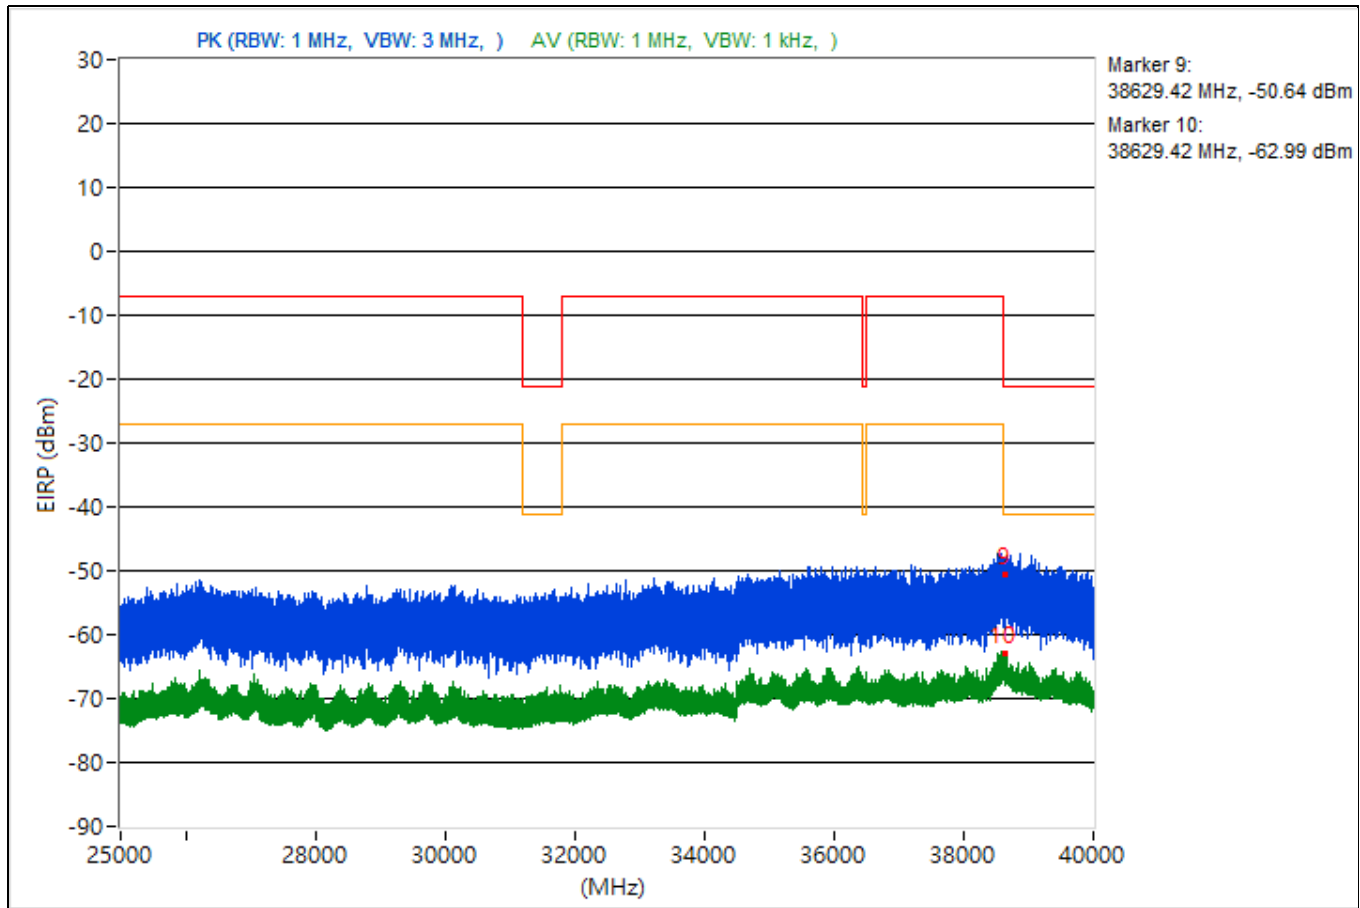


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.26	46.9 PK	74	-27.1	-53.28	4.92	-48.36
2	3823.26	35.38 AV	54	-18.62	-64.8	4.92	-59.88
3	14495.29	43.93 PK	74	-30.07	-56.25	4.92	-51.33
4	14495.29	35.07 AV	54	-18.93	-65.11	4.92	-60.19
5	19345.7	44.98 PK	74	-29.02	-55.2	4.92	-50.28
6	19345.7	36.12 AV	54	-17.88	-64.06	4.92	-59.14
7	22402.3	47.54 PK	74	-26.46	-52.64	4.92	-47.72
8	22402.3	37.03 AV	54	-16.97	-63.15	4.92	-58.23
9	38602.76	41.22 PK	74	-32.78	-58.96	4.92	-54.04
10	38602.76	32.61 AV	54	-21.39	-67.57	4.92	-62.65

Note: Margin value = Emission Level - Limit value

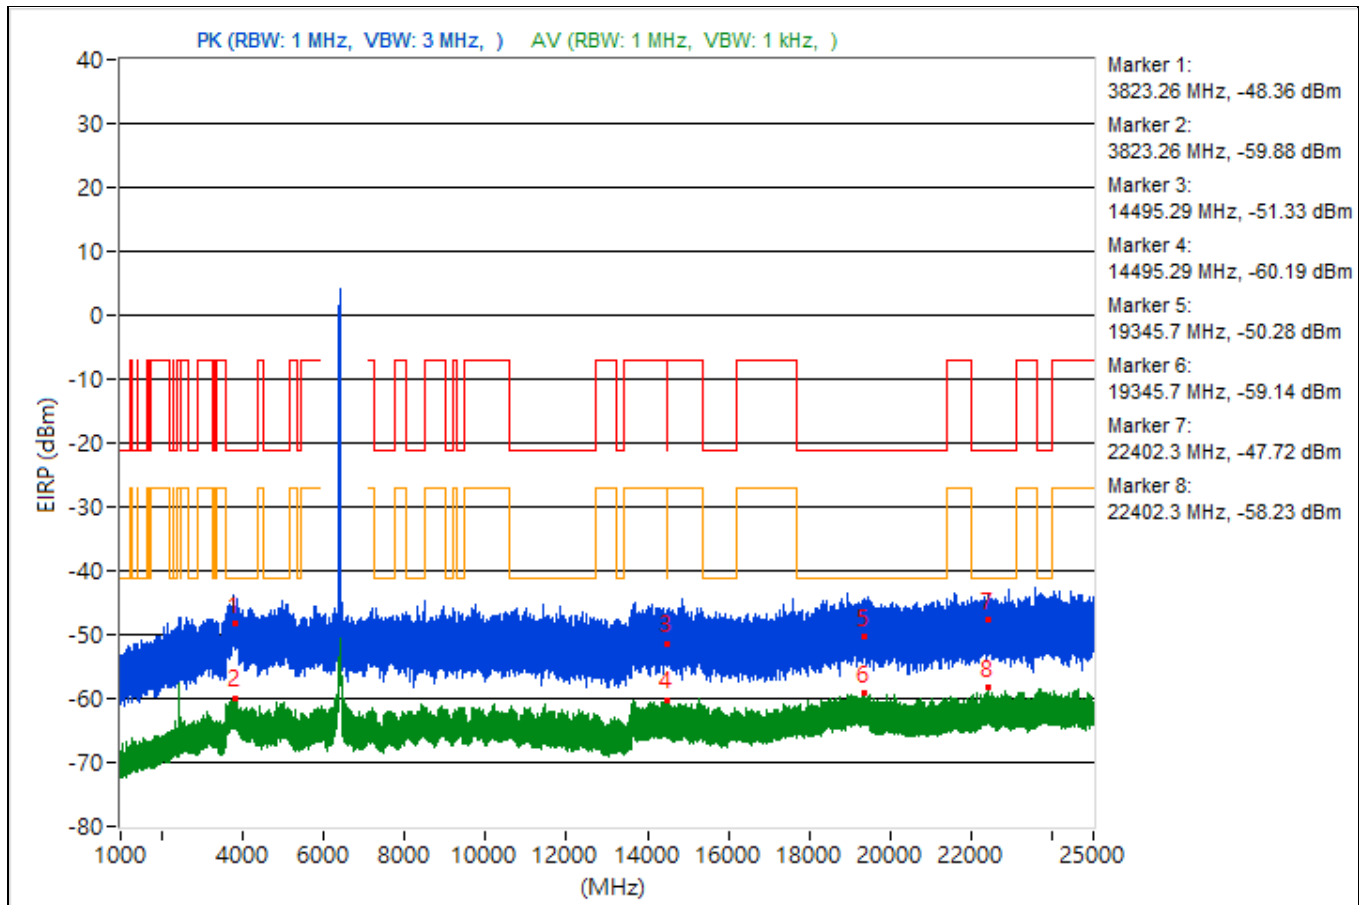


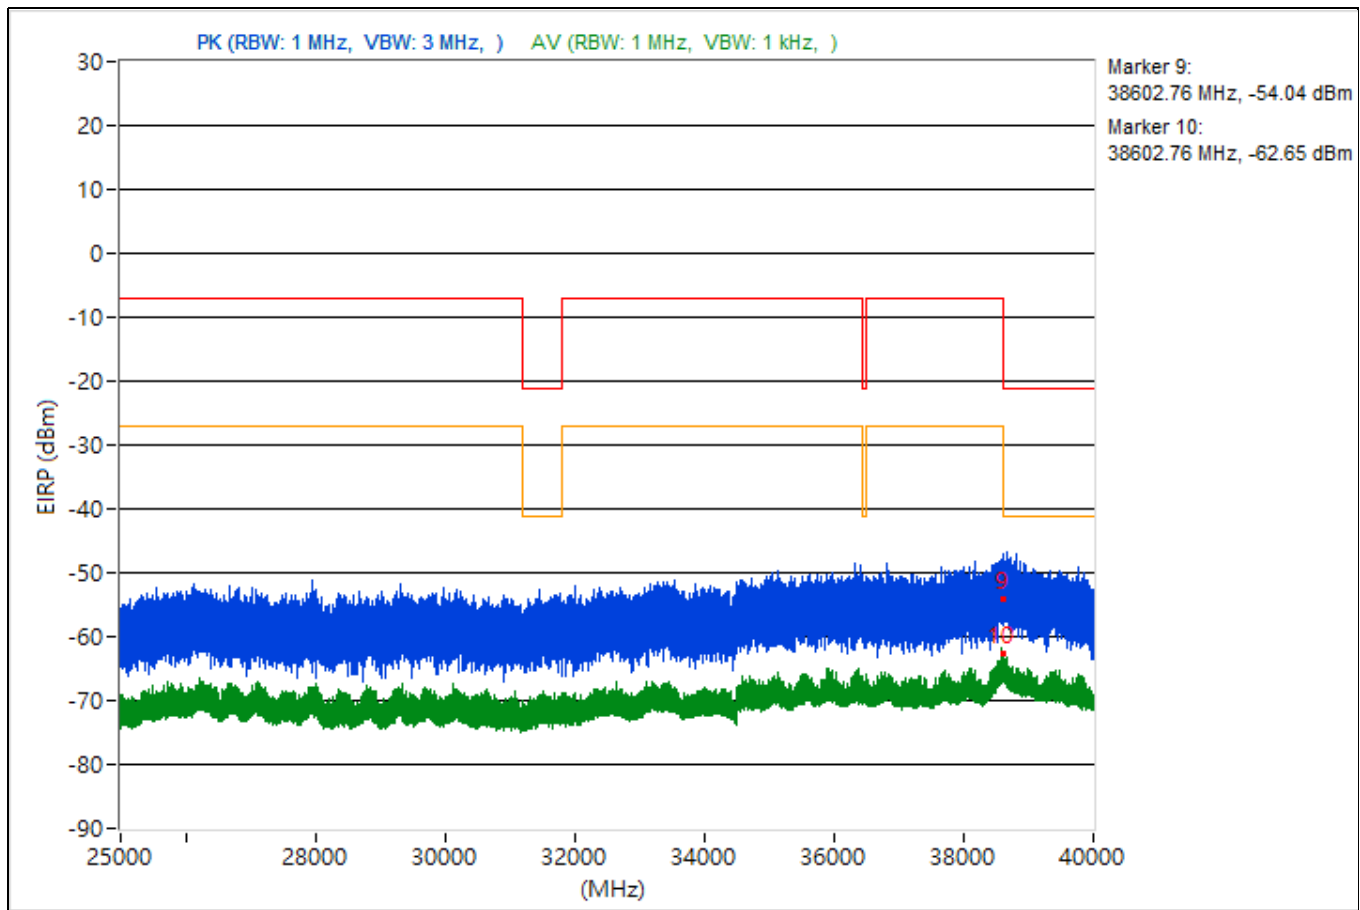


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3732.8	46.87 PK	74	-27.13	-53.31	4.92	-48.39
2	3732.8	36.02 AV	54	-17.98	-64.16	4.92	-59.24
3	8492	43.02 PK	74	-30.98	-57.16	4.92	-52.24
4	8492	34.8 AV	54	-19.2	-65.38	4.92	-60.46
5	19524.1	47.49 PK	74	-26.51	-52.69	4.92	-47.77
6	19524.1	36.04 AV	54	-17.96	-64.14	4.92	-59.22
7	22438.2	44.76 PK	74	-29.24	-55.42	4.92	-50.5
8	22438.2	36.74 AV	54	-17.26	-63.44	4.92	-58.52
9	38618.31	43.3 PK	74	-30.7	-56.88	4.92	-51.96
10	38618.31	32.39 AV	54	-21.61	-67.79	4.92	-62.87

Note: Margin value = Emission Level - Limit value

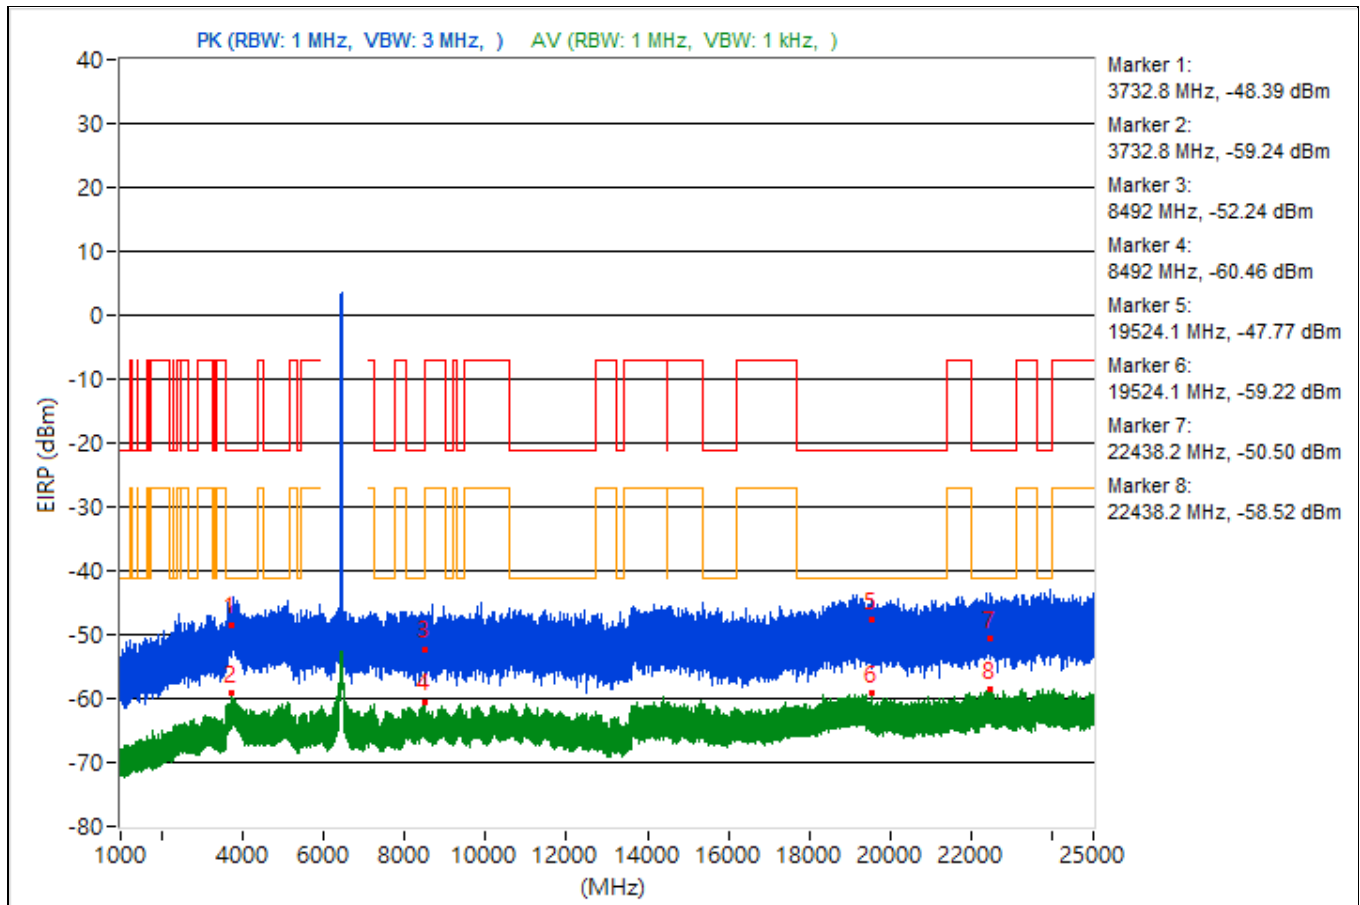


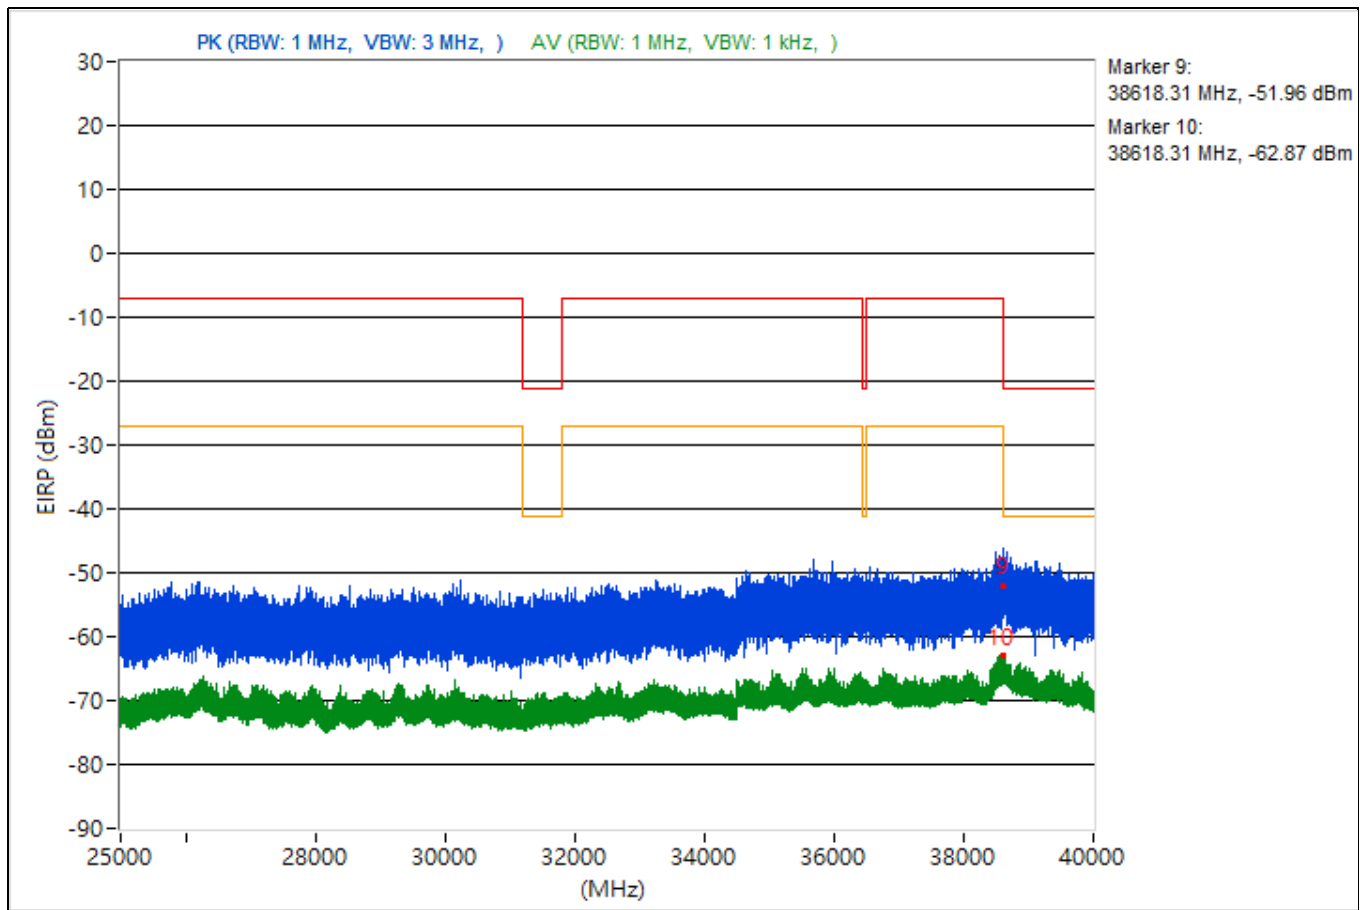


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3767.64	46.13 PK	74	-27.87	-54.05	4.92	-49.13
2	3767.64	35.4 AV	54	-18.6	-64.78	4.92	-59.86
3	14483.38	45.06 PK	74	-28.94	-55.12	4.92	-50.2
4	14483.38	34.85 AV	54	-19.15	-65.33	4.92	-60.41
5	19011.1	46.07 PK	74	-27.93	-54.11	4.92	-49.19
6	19011.1	36.41 AV	54	-17.59	-63.77	4.92	-58.85
7	23690.7	43.66 PK	74	-30.34	-56.52	4.92	-51.6
8	23690.7	36.77 AV	54	-17.23	-63.41	4.92	-58.49
9	38637.96	40.91 PK	74	-33.09	-59.27	4.92	-54.35
10	38637.96	33.04 AV	54	-20.96	-67.14	4.92	-62.22

Note: Margin value = Emission Level - Limit value

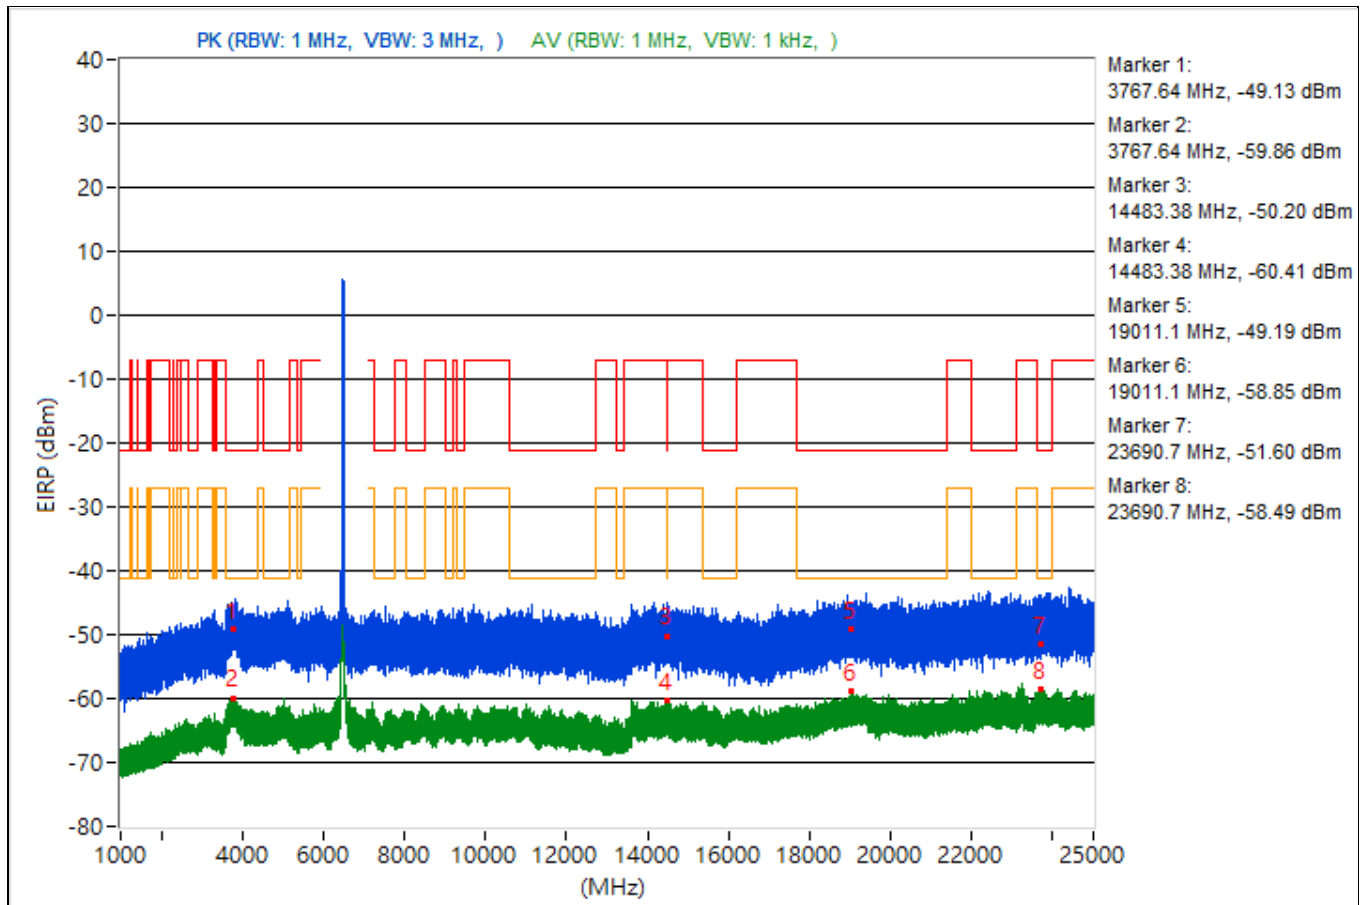


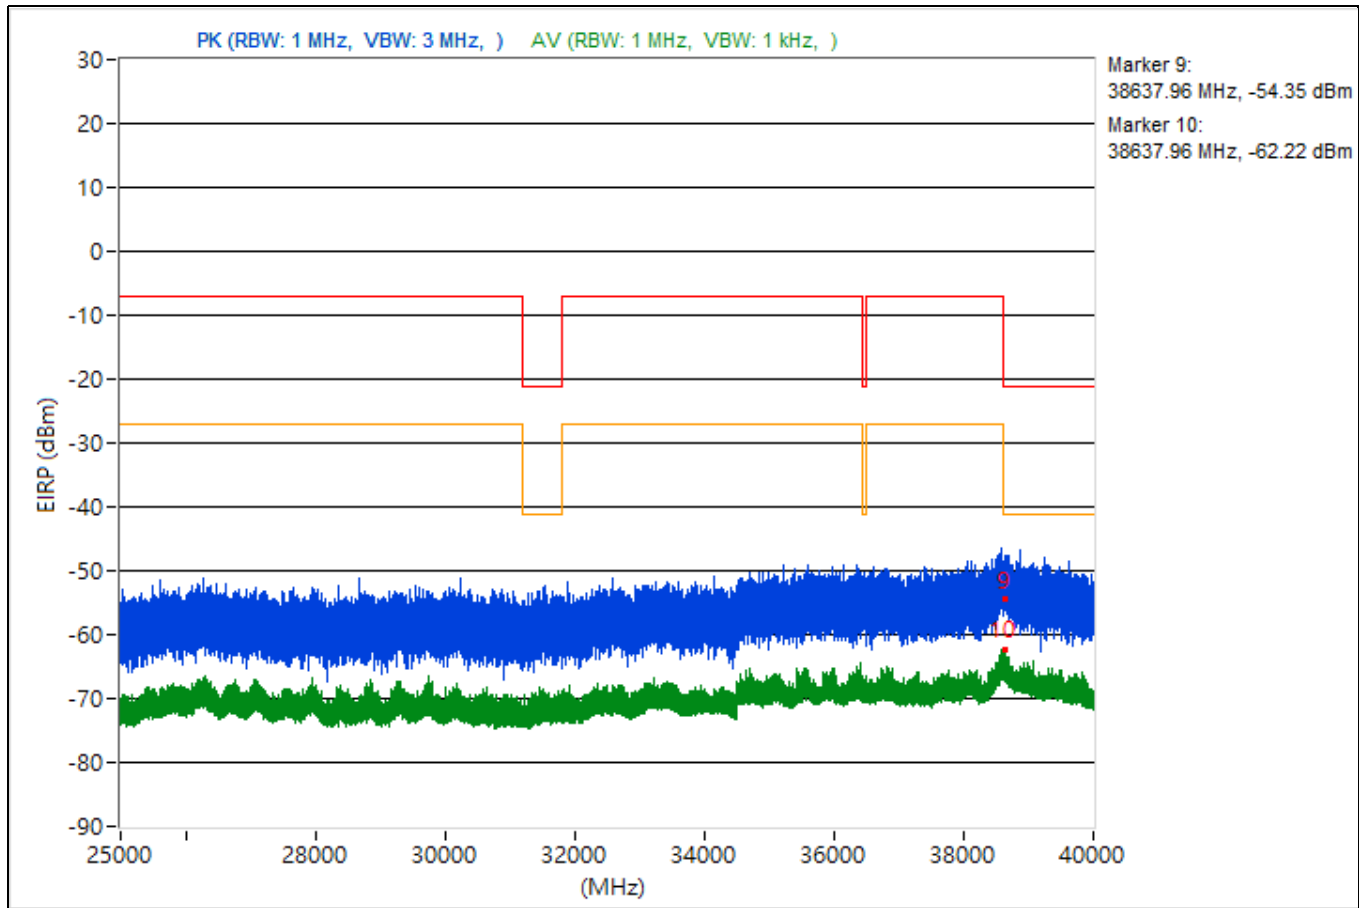


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.82	48.23 PK	74	-25.77	-51.95	4.92	-47.03
2	3825.82	35.9 AV	54	-18.1	-64.28	4.92	-59.36
3	14470.58	44.41 PK	74	-29.59	-55.77	4.92	-50.85
4	14470.58	34.62 AV	54	-19.38	-65.56	4.92	-60.64
5	19156.2	49.16 PK	74	-24.84	-51.02	4.92	-46.1
6	19156.2	36.15 AV	54	-17.85	-64.03	4.92	-59.11
7	23873.2	46.73 PK	74	-27.27	-53.45	4.92	-48.53
8	23873.2	36.78 AV	54	-17.22	-63.4	4.92	-58.48
9	38600.18	40.65 PK	74	-33.35	-59.53	4.92	-54.61
10	38600.18	32.55 AV	54	-21.45	-67.63	4.92	-62.71

Note: Margin value = Emission Level - Limit value

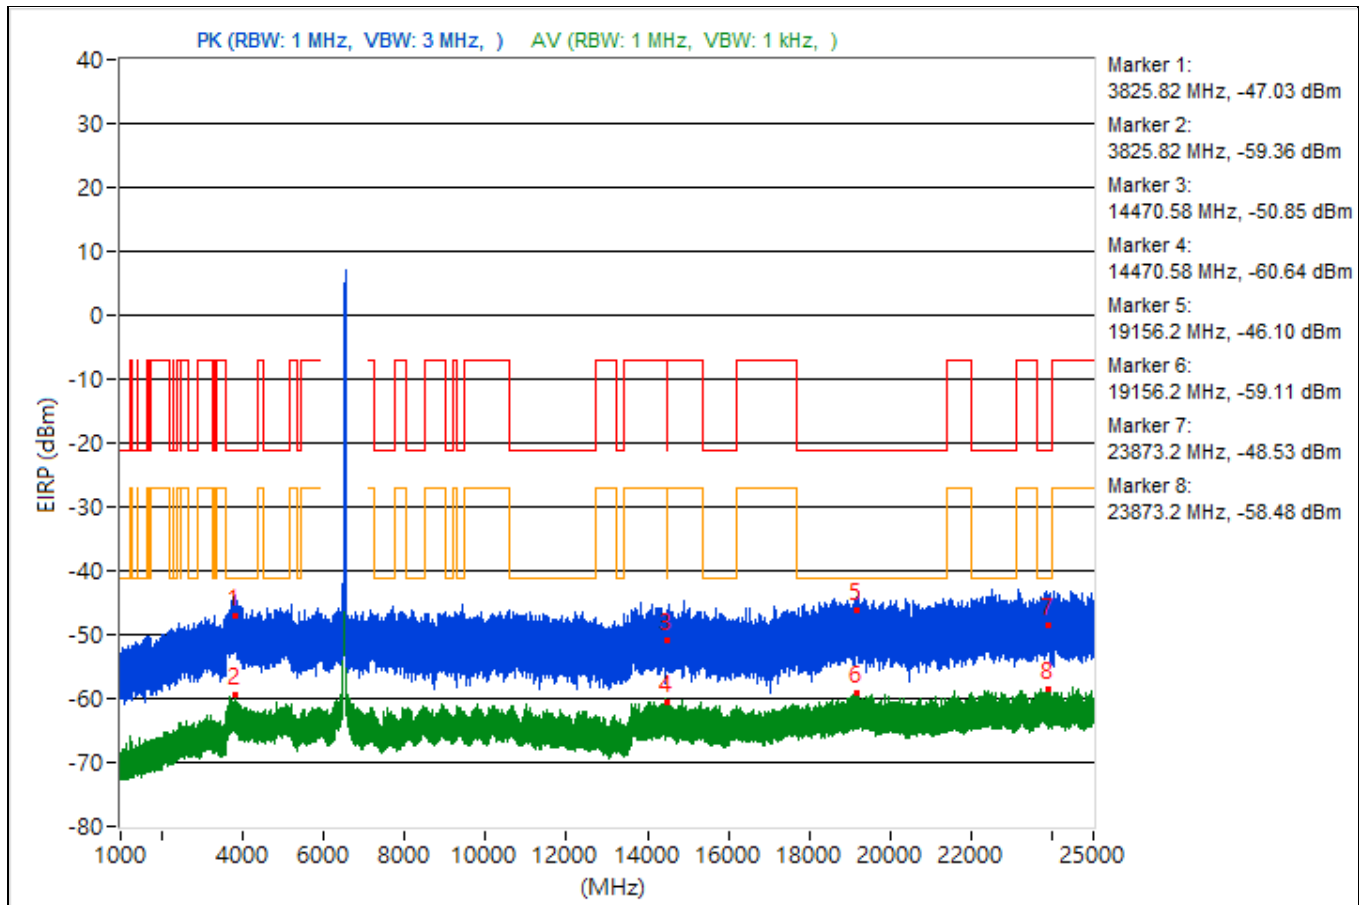


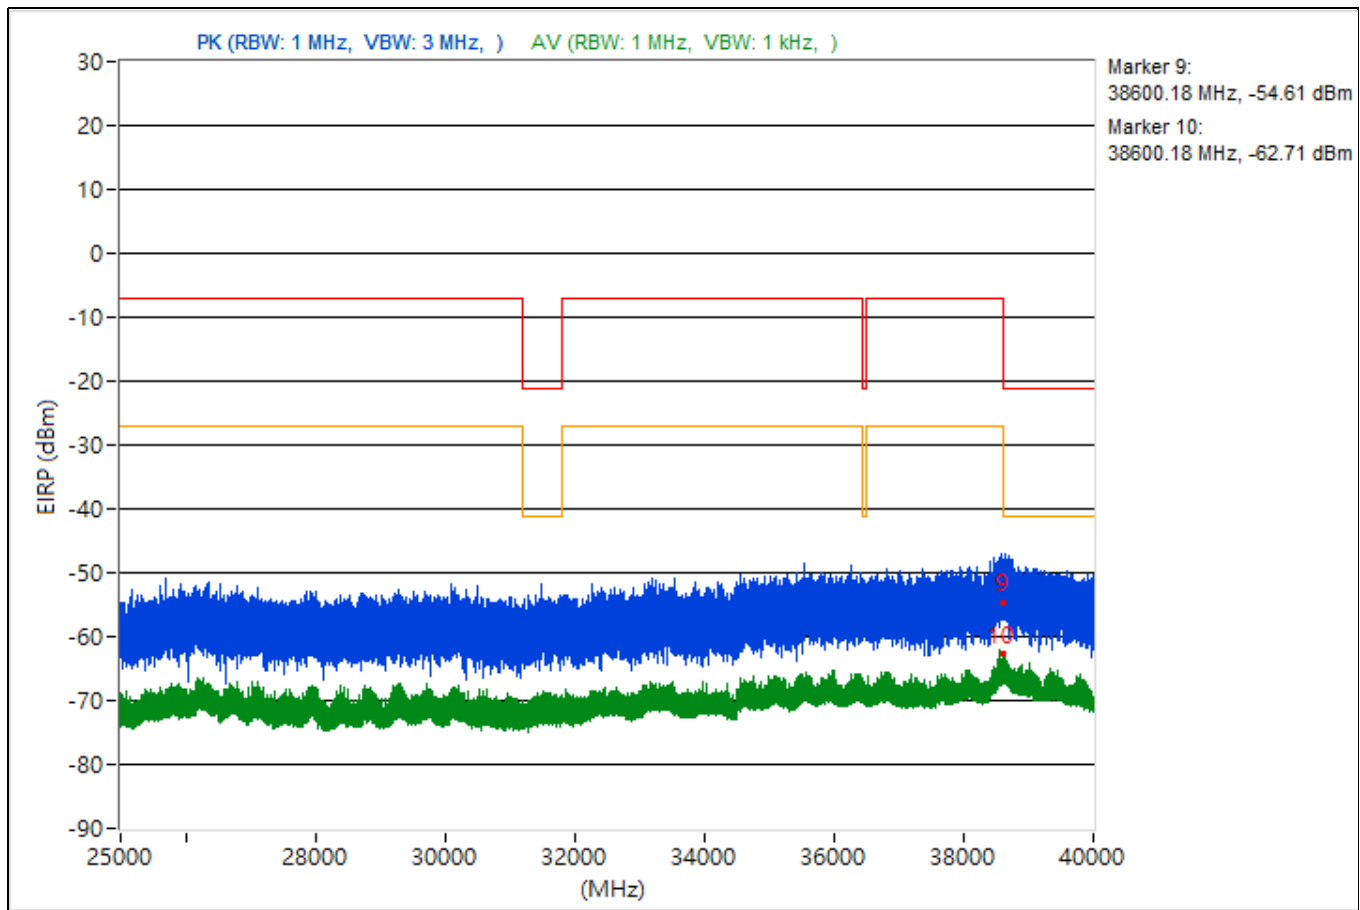


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.52	47.12 PK	74	-26.88	-53.06	4.92	-48.14
2	3812.52	35.59 AV	54	-18.41	-64.59	4.92	-59.67
3	14477.51	46.17 PK	74	-27.83	-54.01	4.92	-49.09
4	14477.51	34.55 AV	54	-19.45	-65.63	4.92	-60.71
5	19199.4	43.62 PK	74	-30.38	-56.56	4.92	-51.64
6	19199.4	36.89 AV	54	-17.11	-63.29	4.92	-58.37
7	23731.3	47.2 PK	74	-26.8	-52.98	4.92	-48.06
8	23731.3	36.88 AV	54	-17.12	-63.3	4.92	-58.38
9	38614.58	45.74 PK	74	-28.26	-54.44	4.92	-49.52
10	38614.58	32.18 AV	54	-21.82	-68	4.92	-63.08

Note: Margin value = Emission Level - Limit value

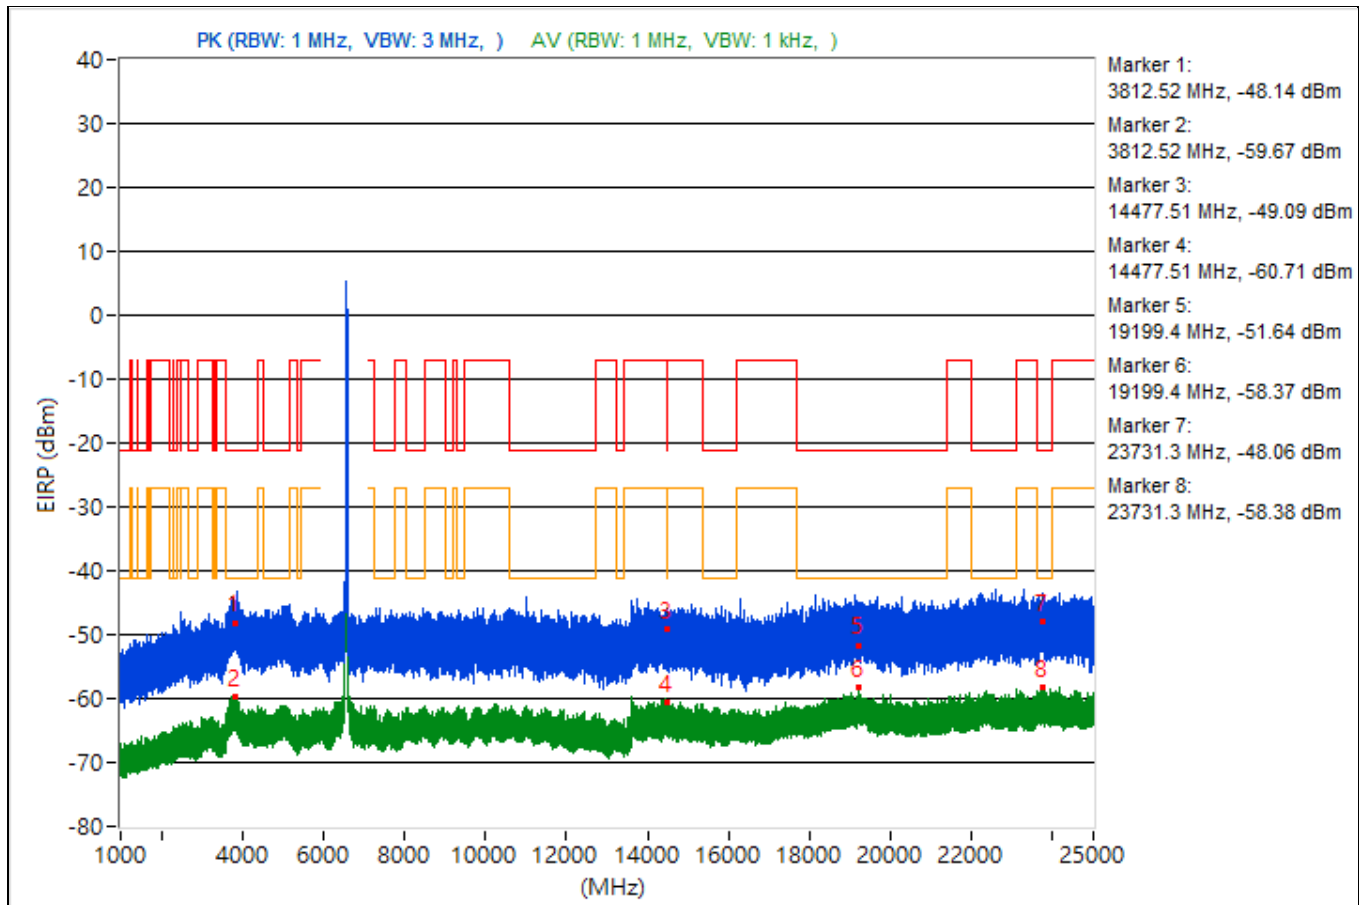


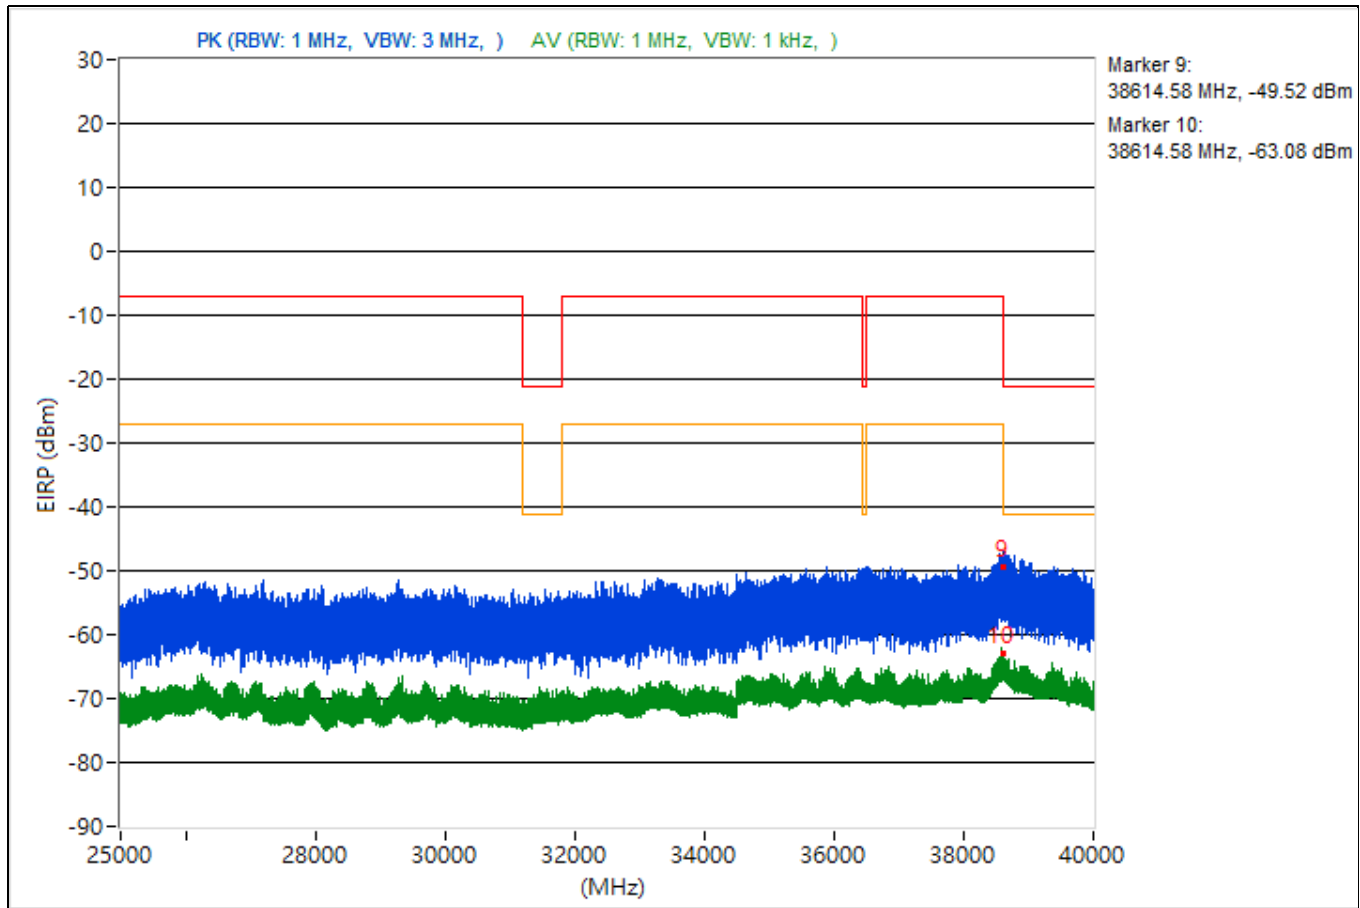


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3761.19	49.57 PK	74	-24.43	-50.61	4.92	-45.69
2	3761.19	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	14485.16	44.89 PK	74	-29.11	-55.29	4.92	-50.37
4	14485.16	34.9 AV	54	-19.1	-65.28	4.92	-60.36
5	18846.9	47.5 PK	74	-26.5	-52.68	4.92	-47.76
6	18846.9	36.02 AV	54	-17.98	-64.16	4.92	-59.24
7	23662.6	47.3 PK	74	-26.7	-52.88	4.92	-47.96
8	23662.6	36.99 AV	54	-17.01	-63.19	4.92	-58.27
9	38601.33	40.74 PK	74	-33.26	-59.44	4.92	-54.52
10	38601.33	32.15 AV	54	-21.85	-68.03	4.92	-63.11

Note: Margin value = Emission Level - Limit value

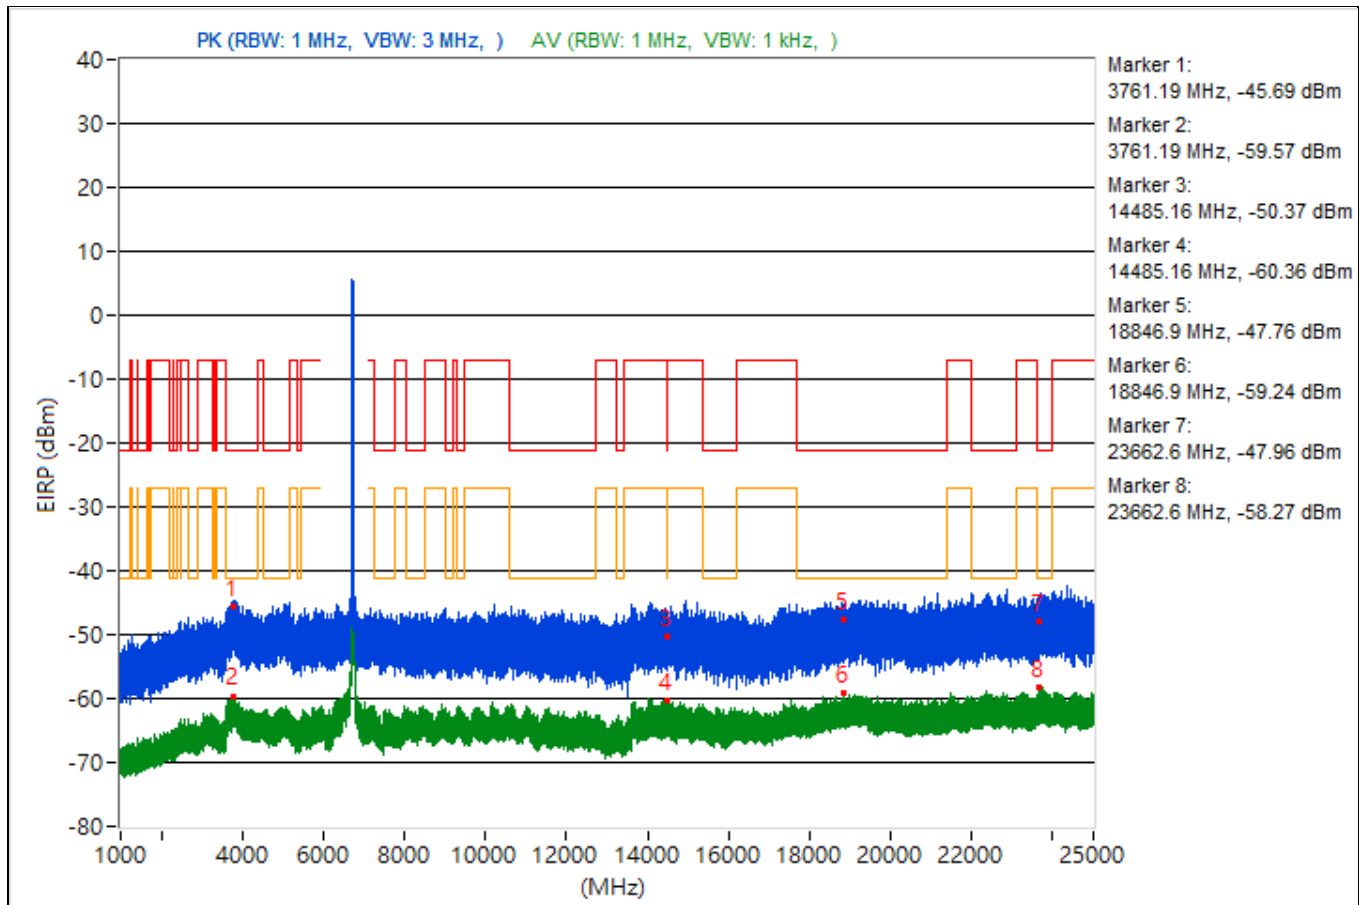


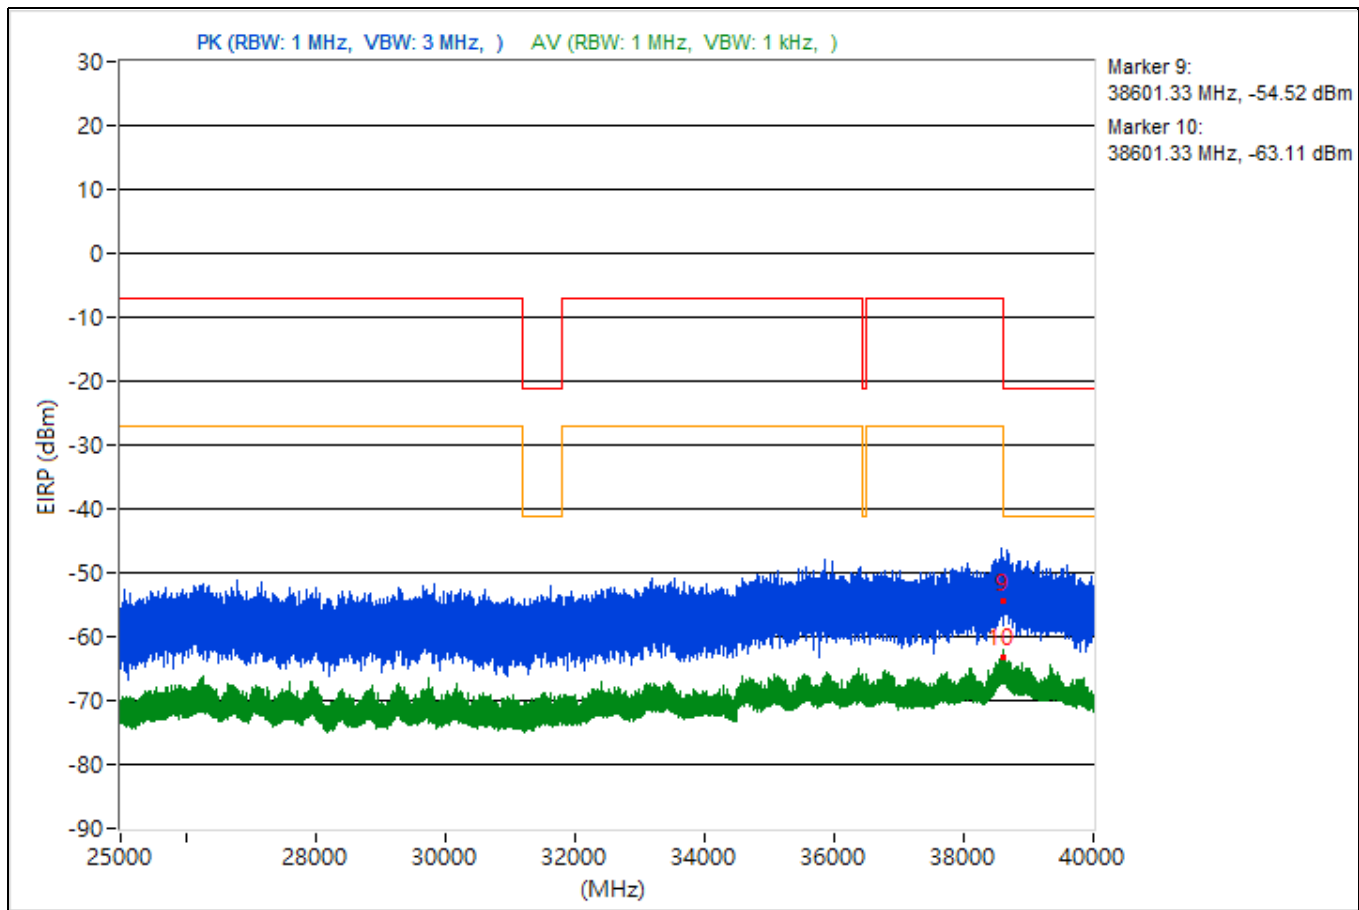


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.07	44.21 PK	74	-29.79	-55.97	4.92	-51.05
2	3820.07	35.78 AV	54	-18.22	-64.4	4.92	-59.48
3	8076.09	45.18 PK	74	-28.82	-55	4.92	-50.08
4	8076.09	35.11 AV	54	-18.89	-65.07	4.92	-60.15
5	19110.2	46.96 PK	74	-27.04	-53.22	4.92	-48.3
6	19110.2	36.48 AV	54	-17.52	-63.7	4.92	-58.78
7	23704.7	49.17 PK	74	-24.83	-51.01	4.92	-46.09
8	23704.7	36.68 AV	54	-17.32	-63.5	4.92	-58.58
9	38603.73	44.37 PK	74	-29.63	-55.81	4.92	-50.89
10	38603.73	32.47 AV	54	-21.53	-67.71	4.92	-62.79

Note: Margin value = Emission Level - Limit value

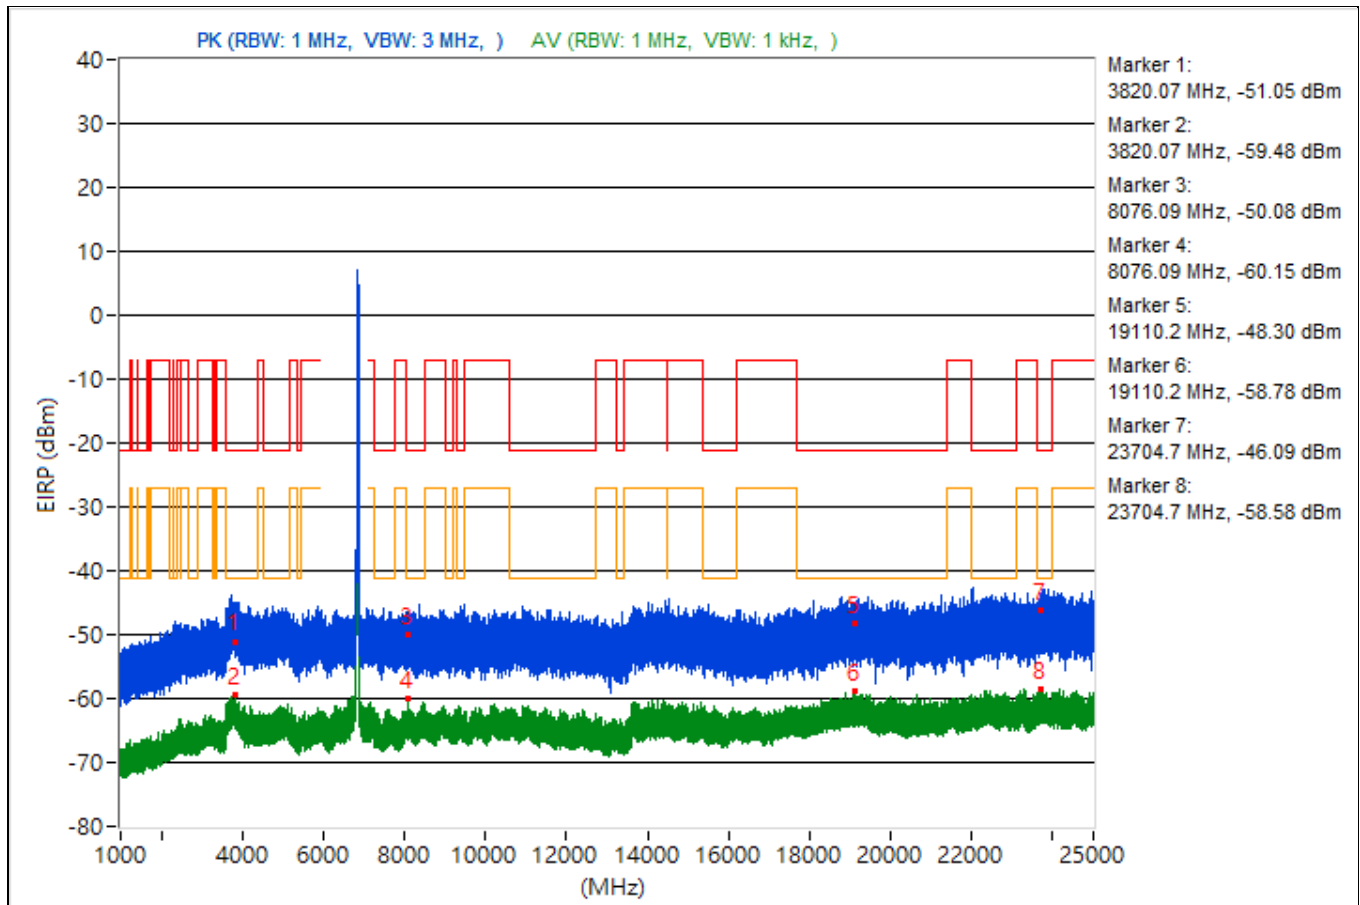


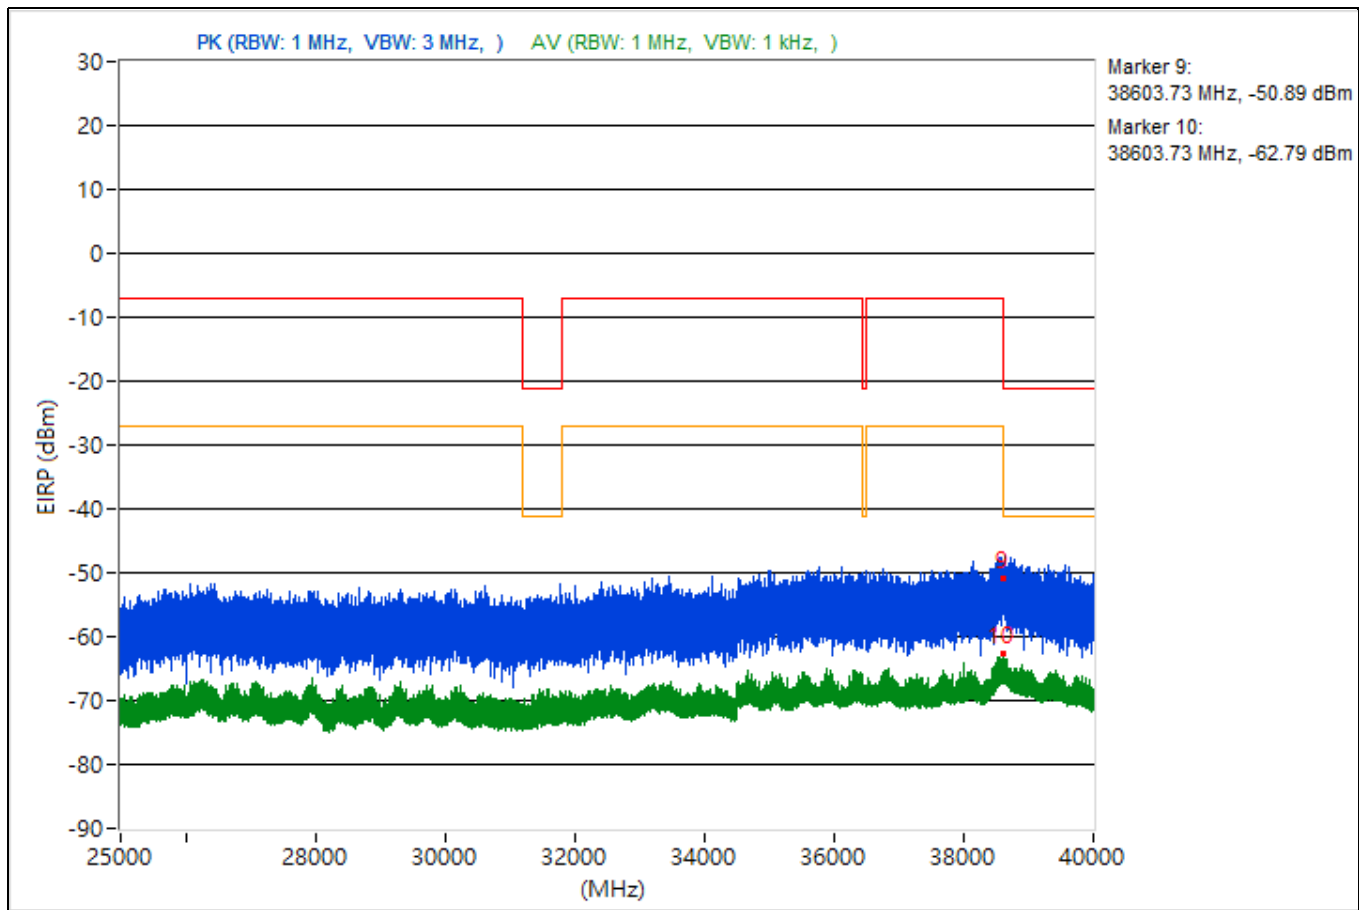


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.61	47.31 PK	74	-26.69	-52.87	4.92	-47.95
2	3757.61	35.52 AV	54	-18.48	-64.66	4.92	-59.74
3	14479.11	46.05 PK	74	-27.95	-54.13	4.92	-49.21
4	14479.11	34.83 AV	54	-19.17	-65.35	4.92	-60.43
5	19322.5	45.42 PK	74	-28.58	-54.76	4.92	-49.84
6	19322.5	35.97 AV	54	-18.03	-64.21	4.92	-59.29
7	22798.6	45.83 PK	74	-28.17	-54.35	4.92	-49.43
8	22798.6	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38601.6	43.46 PK	74	-30.54	-56.72	4.92	-51.8
10	38601.6	33.51 AV	54	-20.49	-66.67	4.92	-61.75

Note: Margin value = Emission Level - Limit value

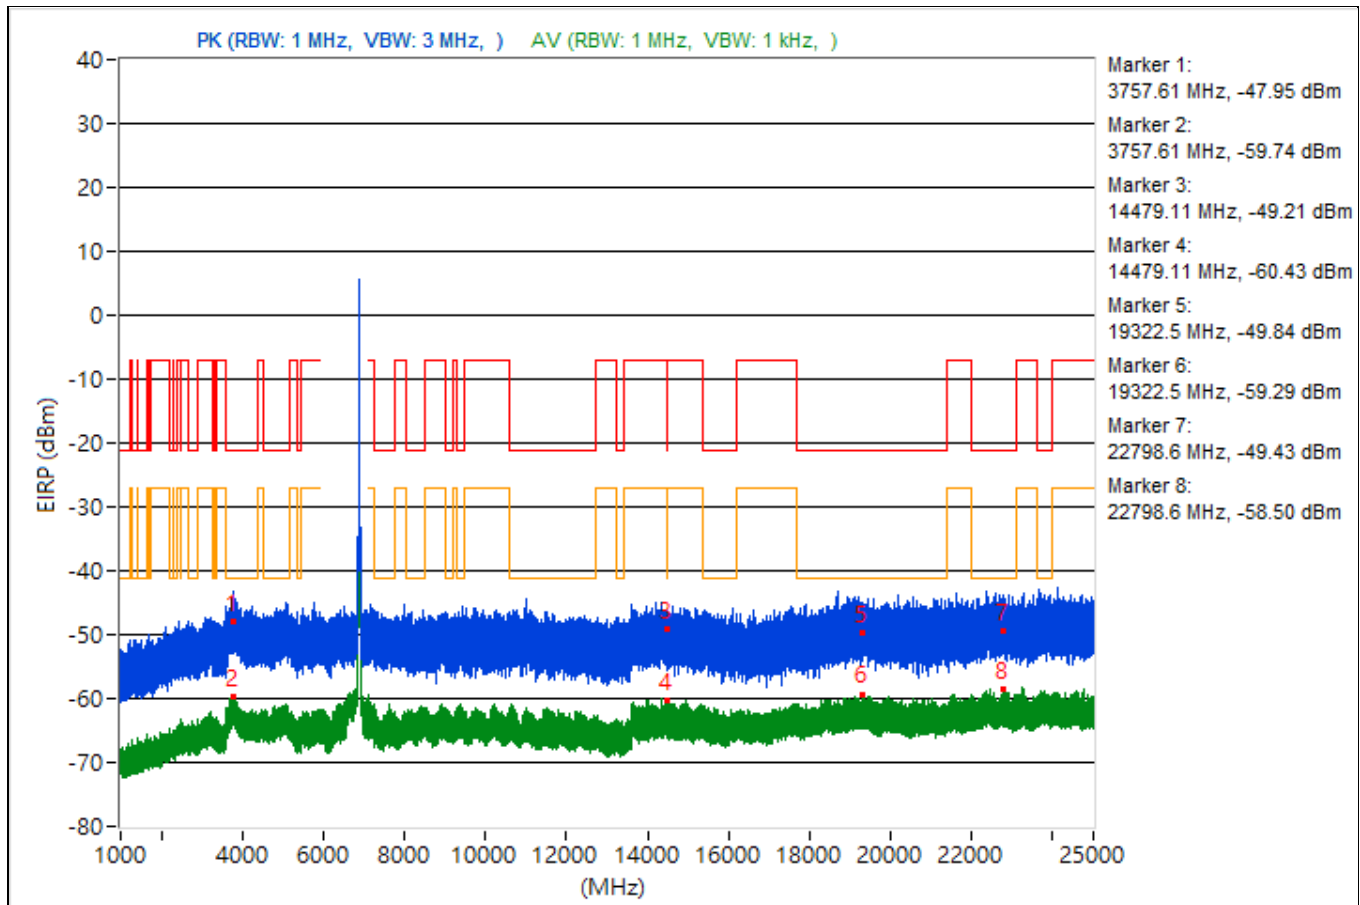


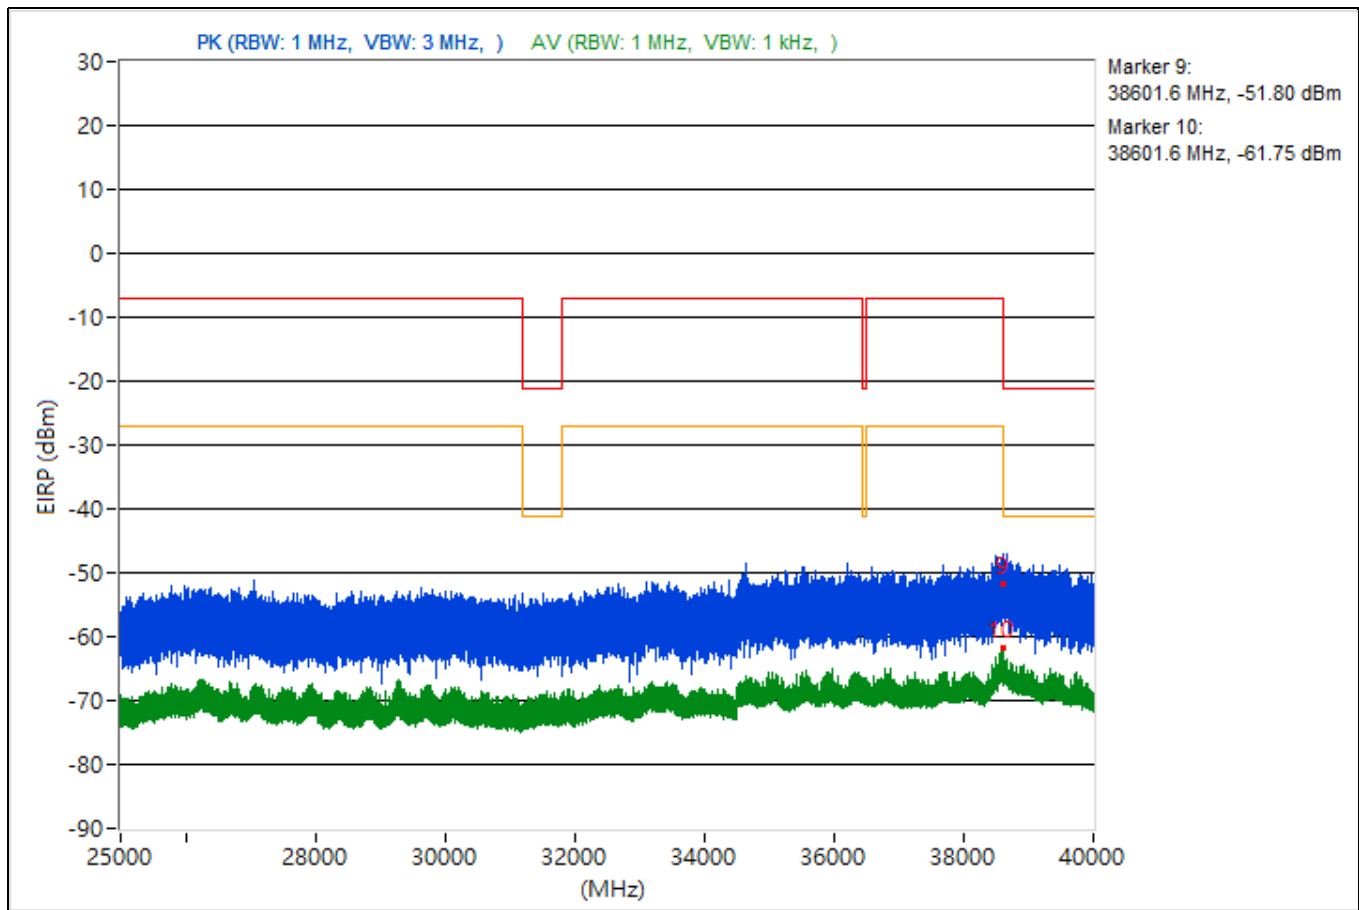


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3793.7	50.03 PK	74	-23.97	-50.15	4.92	-45.23
2	3793.7	36.05 AV	54	-17.95	-64.13	4.92	-59.21
3	14477.87	44.26 PK	74	-29.74	-55.92	4.92	-51
4	14477.87	35.15 AV	54	-18.85	-65.03	4.92	-60.11
5	19093.4	48.22 PK	74	-25.78	-51.96	4.92	-47.04
6	19093.4	35.96 AV	54	-18.04	-64.22	4.92	-59.3
7	22359.4	46.57 PK	74	-27.43	-53.61	4.92	-48.69
8	22359.4	36.98 AV	54	-17.02	-63.2	4.92	-58.28
9	38624.53	41.82 PK	74	-32.18	-58.36	4.92	-53.44
10	38624.53	32.43 AV	54	-21.57	-67.75	4.92	-62.83

Note: Margin value = Emission Level - Limit value

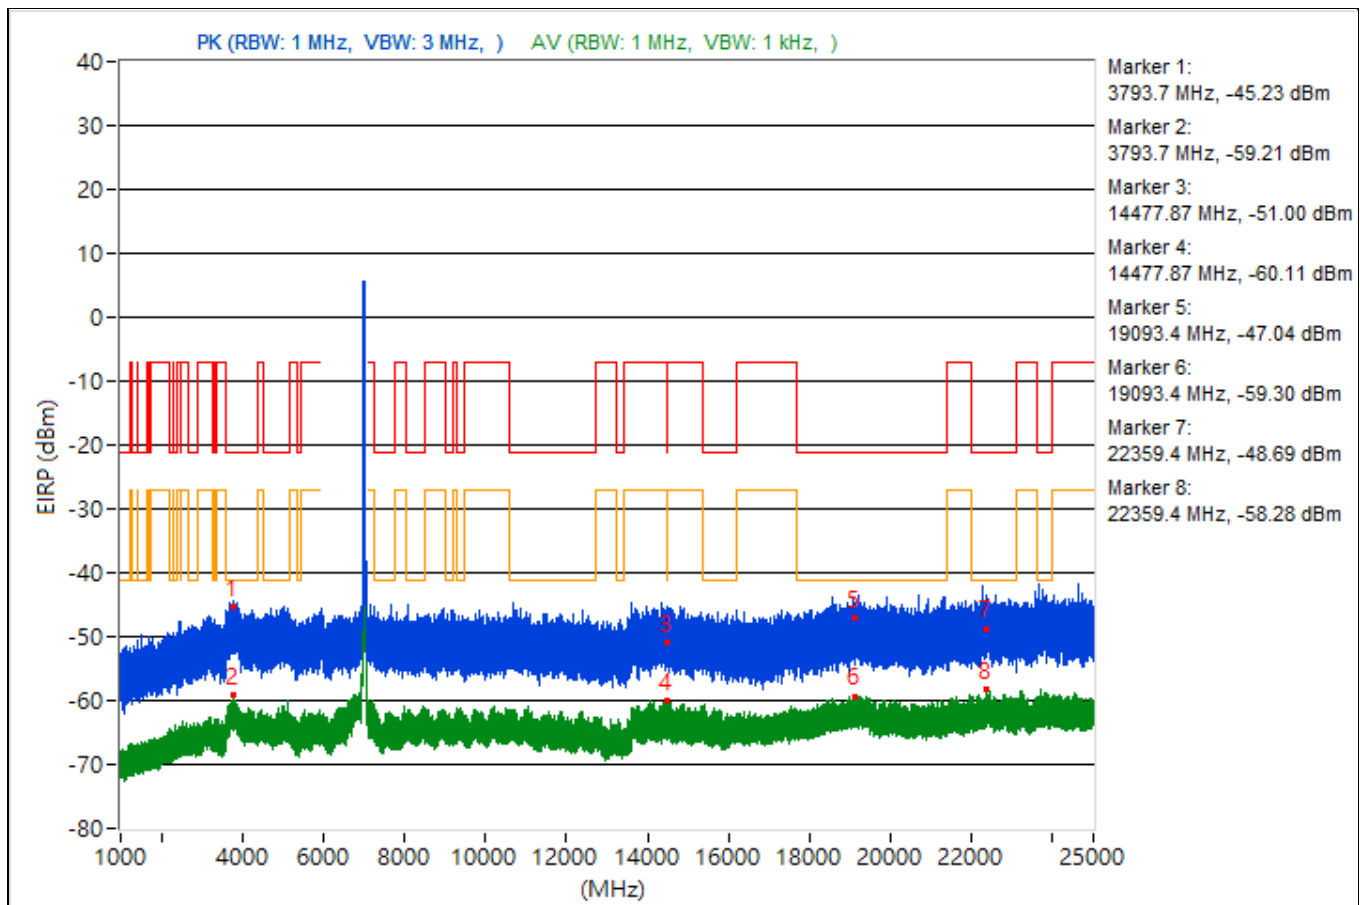


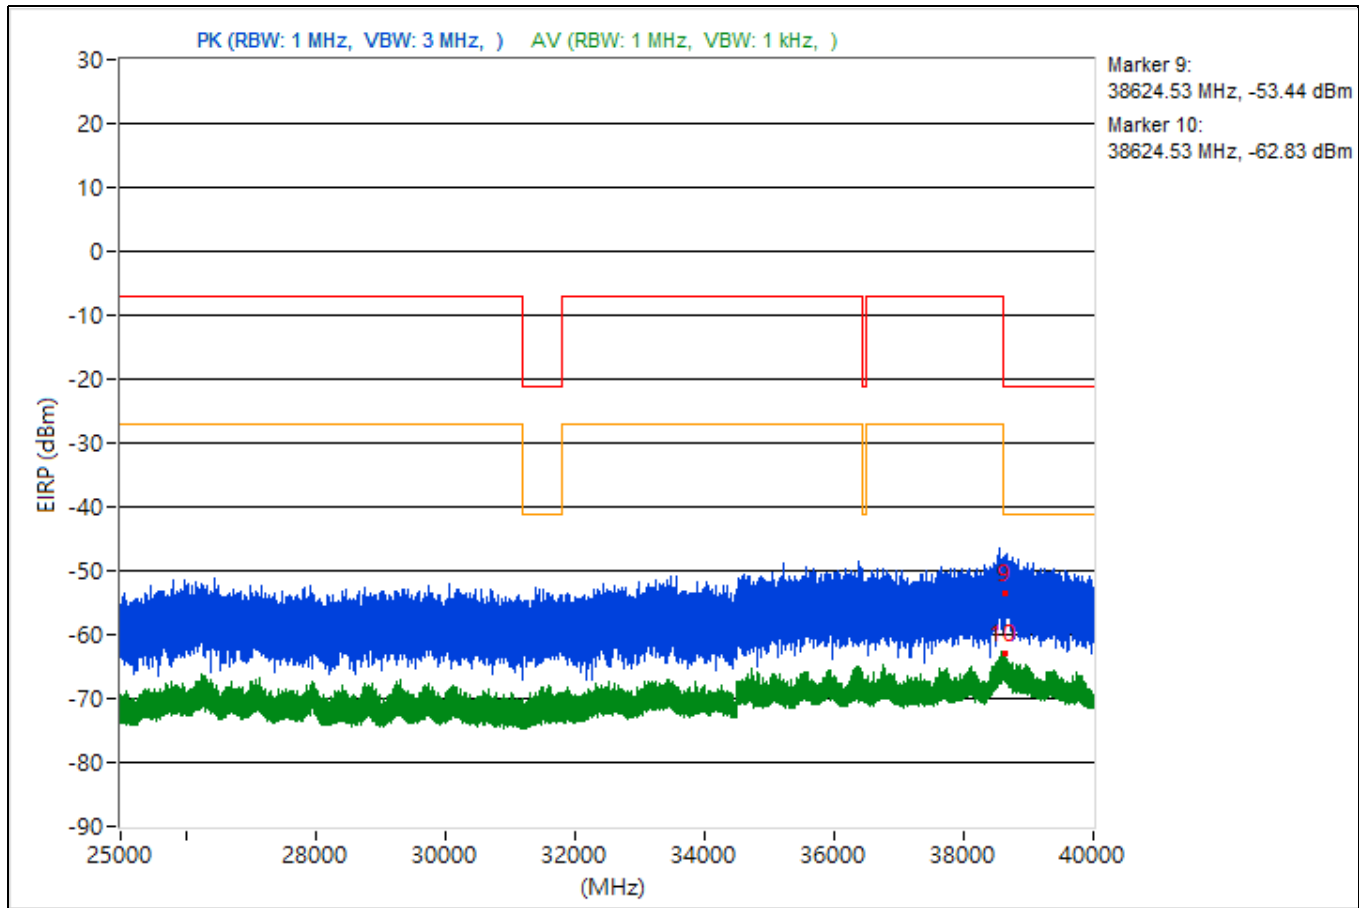


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.84	45.18 PK	74	-28.82	-55	4.92	-50.08
2	3799.84	35.35 AV	54	-18.65	-64.83	4.92	-59.91
3	14497.87	45.13 PK	74	-28.87	-55.05	4.92	-50.13
4	14497.87	34.55 AV	54	-19.45	-65.63	4.92	-60.71
5	19204.8	48.36 PK	74	-25.64	-51.82	4.92	-46.9
6	19204.8	36.3 AV	54	-17.7	-63.88	4.92	-58.96
7	22370.4	46.67 PK	74	-27.33	-53.51	4.92	-48.59
8	22370.4	36.51 AV	54	-17.49	-63.67	4.92	-58.75
9	38626.31	43.68 PK	74	-30.32	-56.5	4.92	-51.58
10	38626.31	31.78 AV	54	-22.22	-68.4	4.92	-63.48

Note: Margin value = Emission Level - Limit value

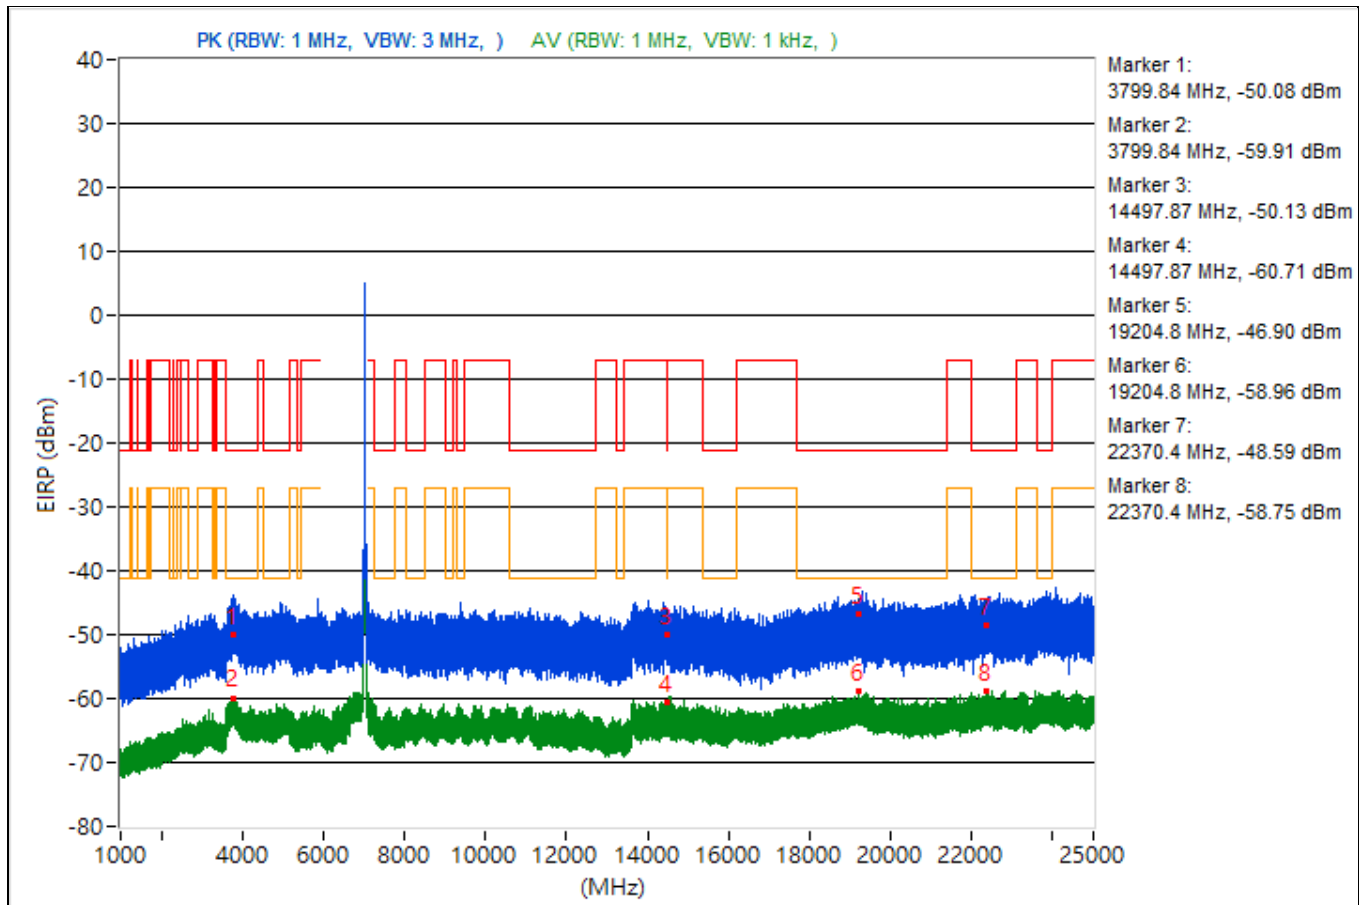


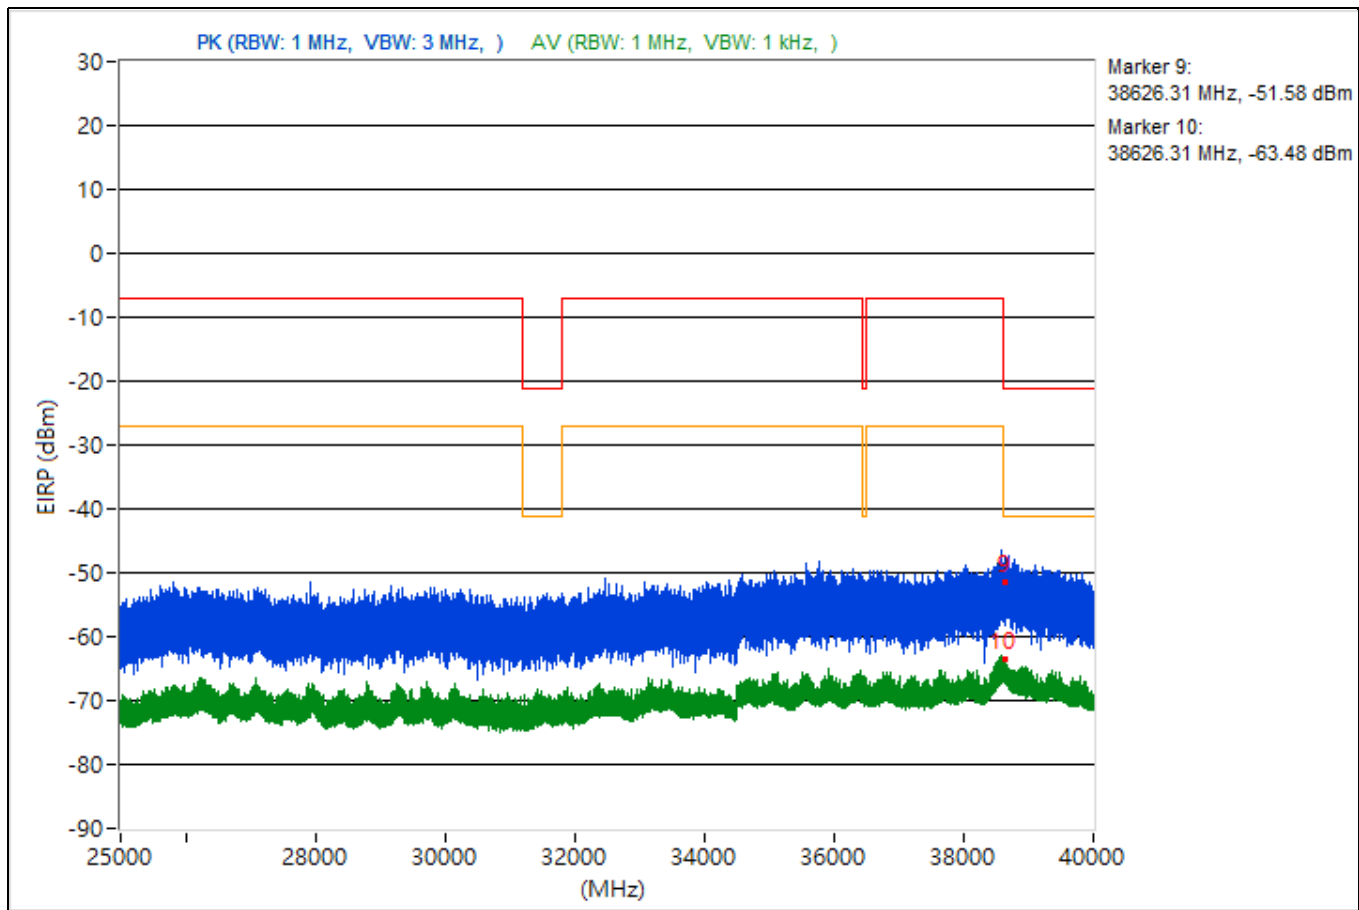


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.7	47.71 PK	74	-26.29	-52.47	4.92	-47.55
2	3842.7	35.45 AV	54	-18.55	-64.73	4.92	-59.81
3	14482.49	45.37 PK	74	-28.63	-54.81	4.92	-49.89
4	14482.49	35.21 AV	54	-18.79	-64.97	4.92	-60.05
5	19310.1	47.06 PK	74	-26.94	-53.12	4.92	-48.2
6	19310.1	36.15 AV	54	-17.85	-64.03	4.92	-59.11
7	23731.3	45.08 PK	74	-28.92	-55.1	4.92	-50.18
8	23731.3	37.03 AV	54	-16.97	-63.15	4.92	-58.23
9	38617.16	42.42 PK	74	-31.58	-57.76	4.92	-52.84
10	38617.16	32.14 AV	54	-21.86	-68.04	4.92	-63.12

Note: Margin value = Emission Level - Limit value

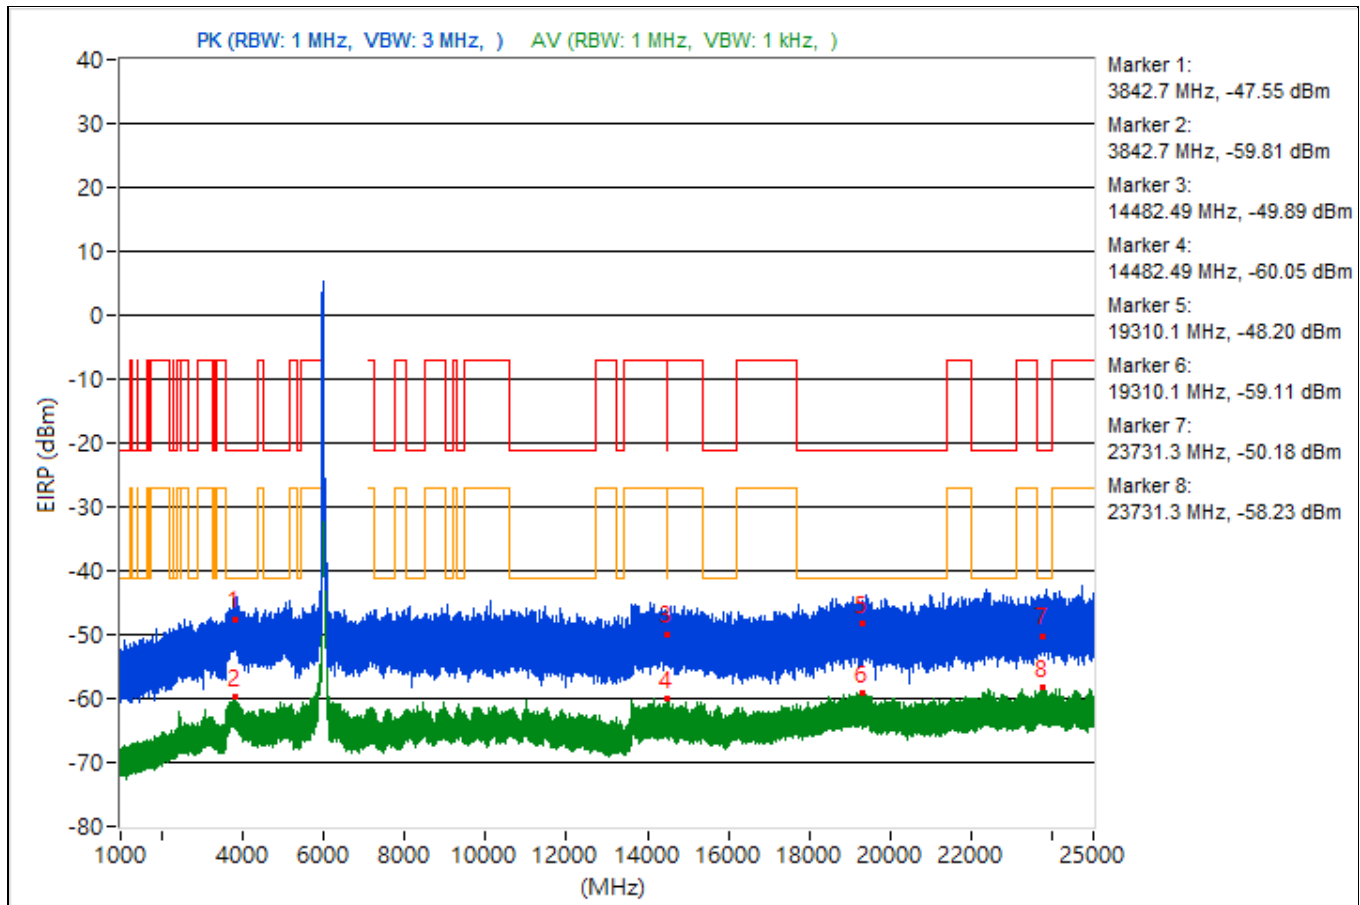


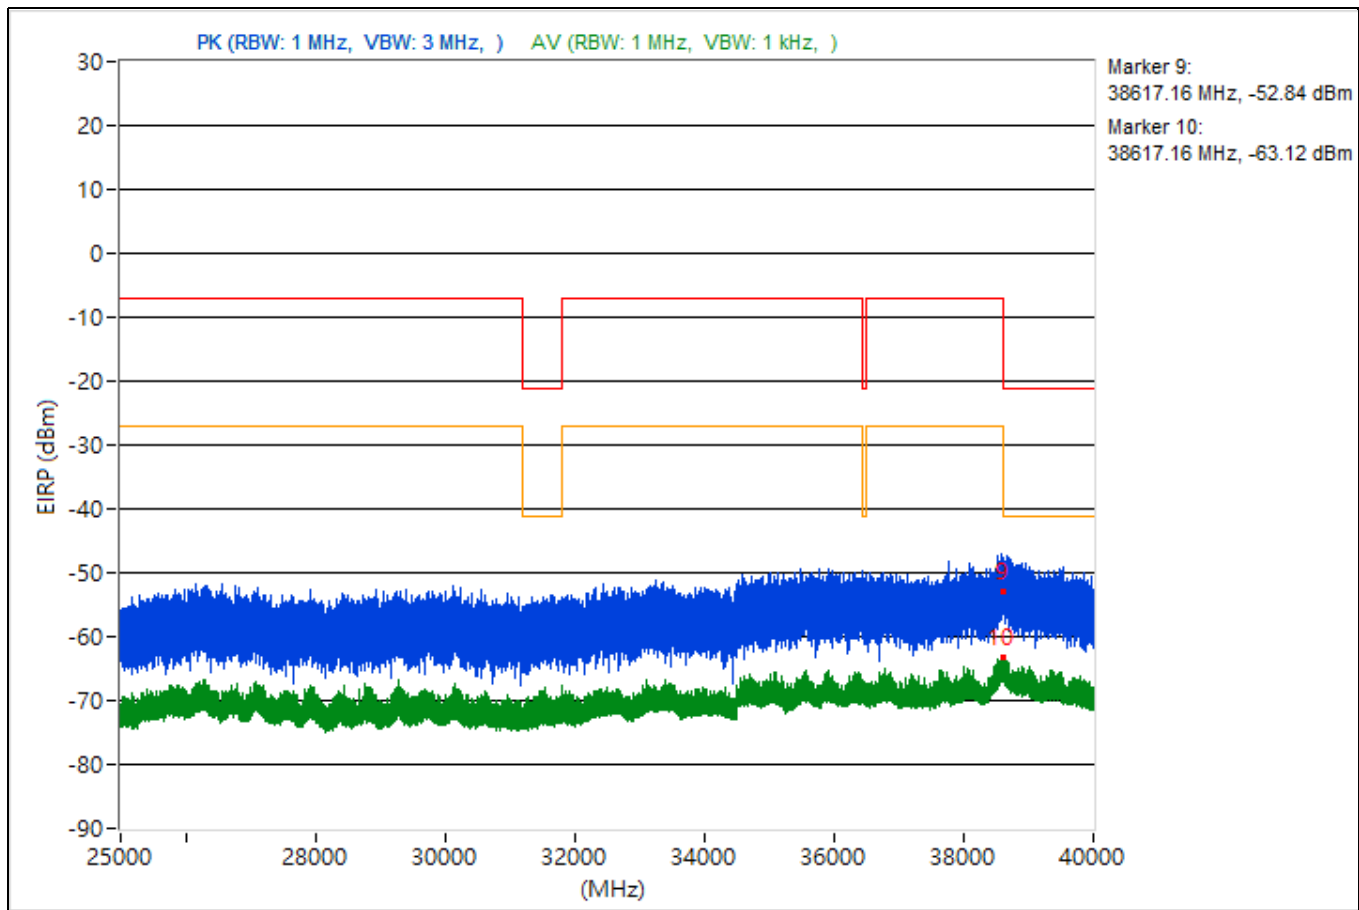


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3827.3	47.08 PK	74	-26.92	-53.1	4.92	-48.18
2	3827.3	35.4 AV	54	-18.6	-64.78	4.92	-59.86
3	14493.6	44.08 PK	74	-29.92	-56.1	4.92	-51.18
4	14493.6	35.51 AV	54	-18.49	-64.67	4.92	-59.75
5	19087.1	48.14 PK	74	-25.86	-52.04	4.92	-47.12
6	19087.1	36.07 AV	54	-17.93	-64.11	4.92	-59.19
7	23932.4	46.94 PK	74	-27.06	-53.24	4.92	-48.32
8	23932.4	36.76 AV	54	-17.24	-63.42	4.92	-58.5
9	38607.38	41.72 PK	74	-32.28	-58.46	4.92	-53.54
10	38607.38	32.63 AV	54	-21.37	-67.55	4.92	-62.63

Note: Margin value = Emission Level - Limit value

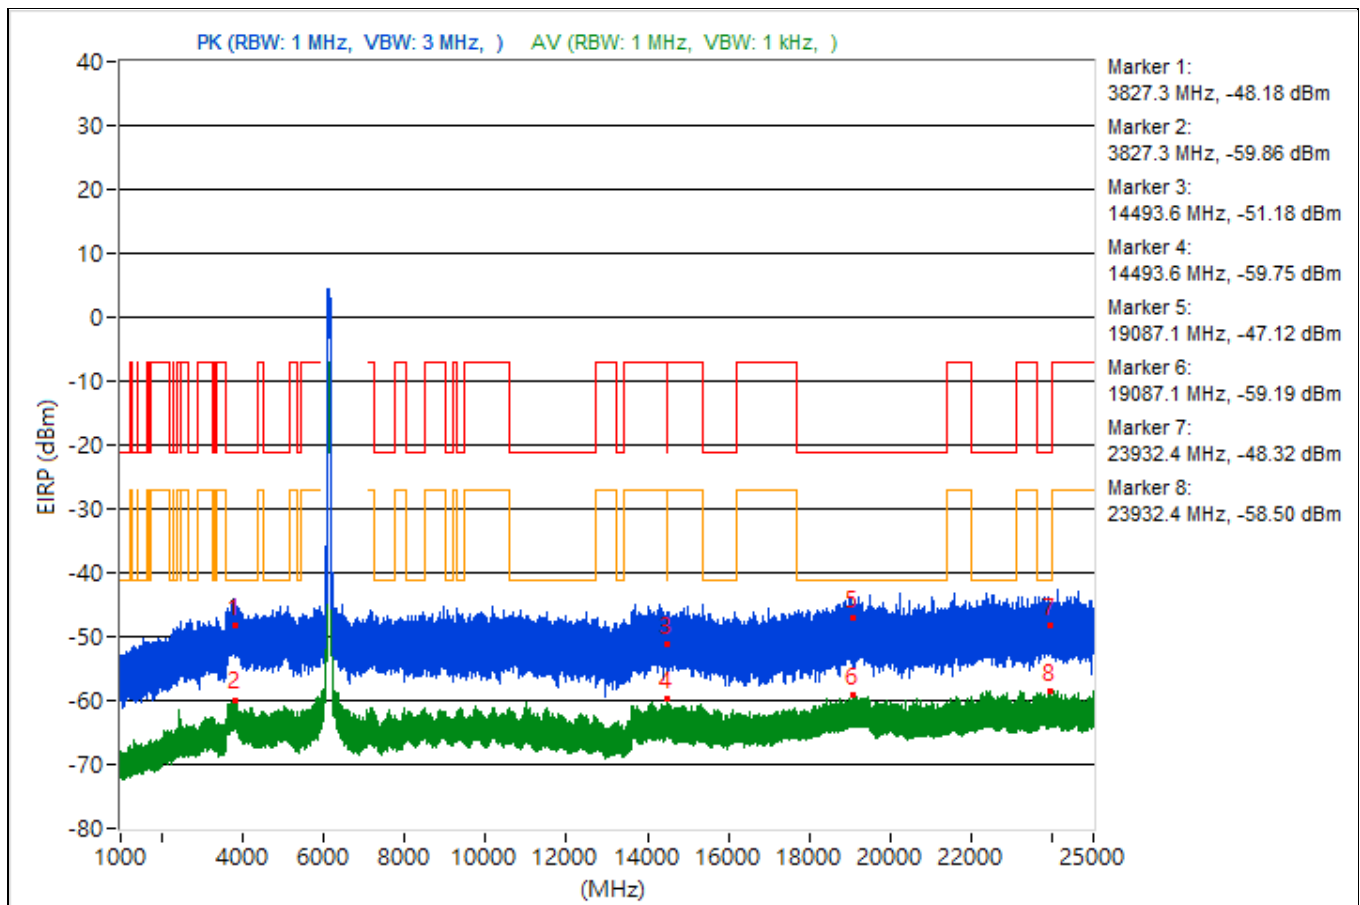


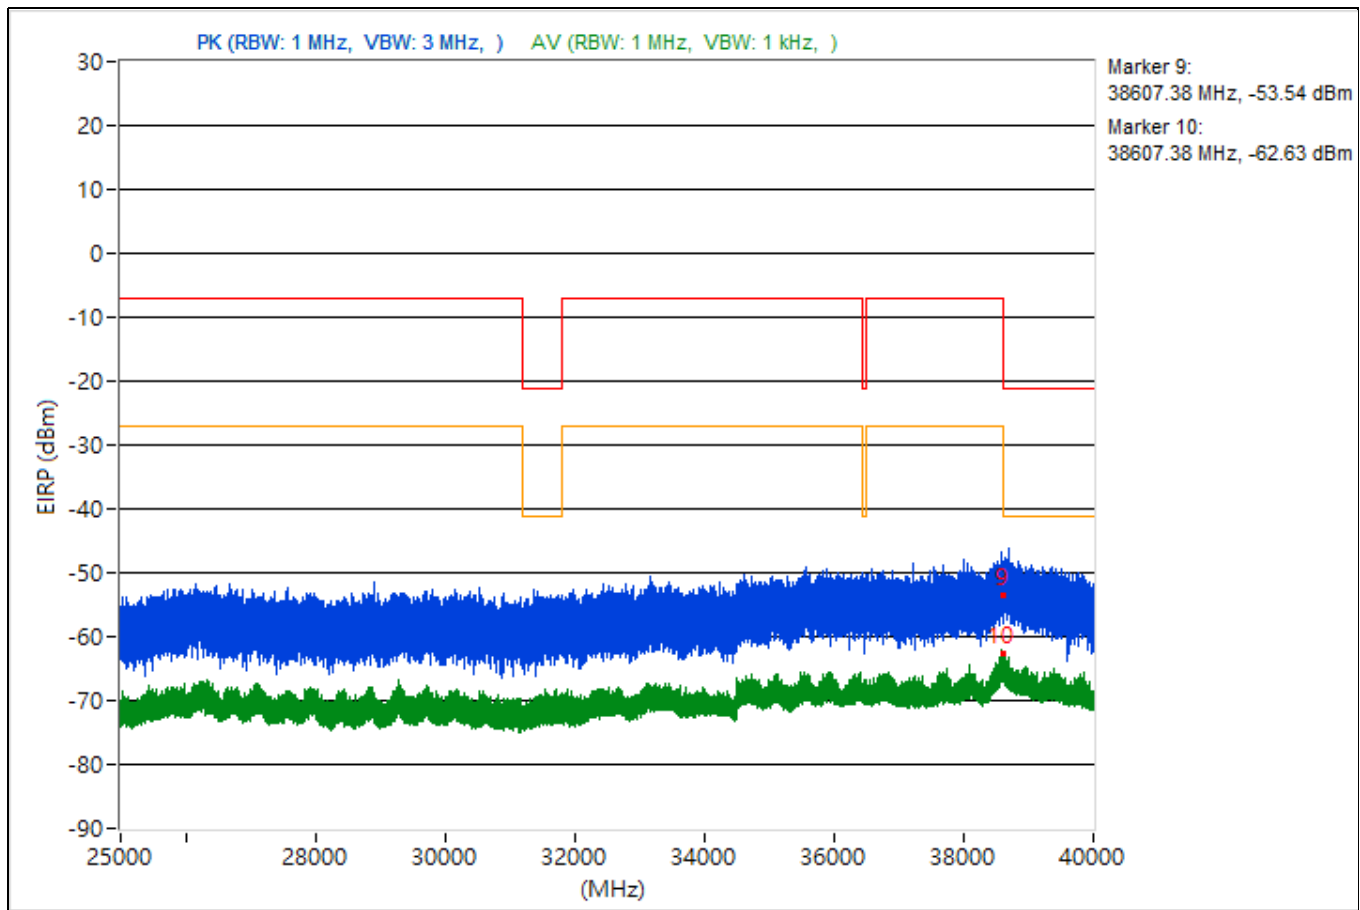


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3853.74	48.63 PK	74	-25.37	-51.55	4.92	-46.63
2	3853.74	35.26 AV	54	-18.74	-64.92	4.92	-60
3	10664.89	41.79 PK	74	-32.21	-58.39	4.92	-53.47
4	10664.89	35.02 AV	54	-18.98	-65.16	4.92	-60.24
5	19415	49.38 PK	74	-24.62	-50.8	4.92	-45.88
6	19415	36.21 AV	54	-17.79	-63.97	4.92	-59.05
7	22454.6	47.37 PK	74	-26.63	-52.81	4.92	-47.89
8	22454.6	37.25 AV	54	-16.75	-62.93	4.92	-58.01
9	38601.51	42.65 PK	74	-31.35	-57.53	4.92	-52.61
10	38601.51	33.56 AV	54	-20.44	-66.62	4.92	-61.7

Note: Margin value = Emission Level - Limit value

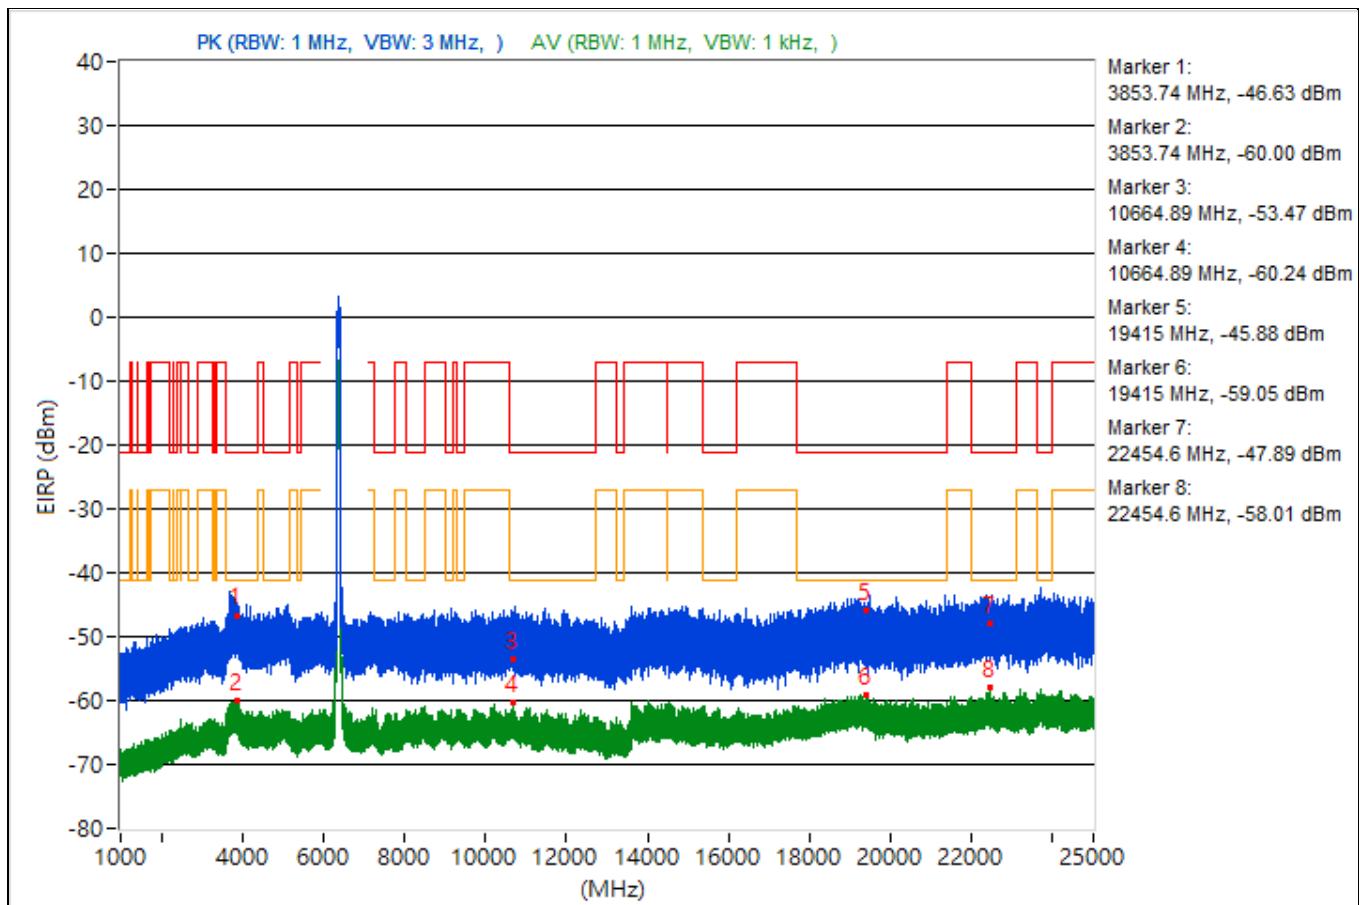


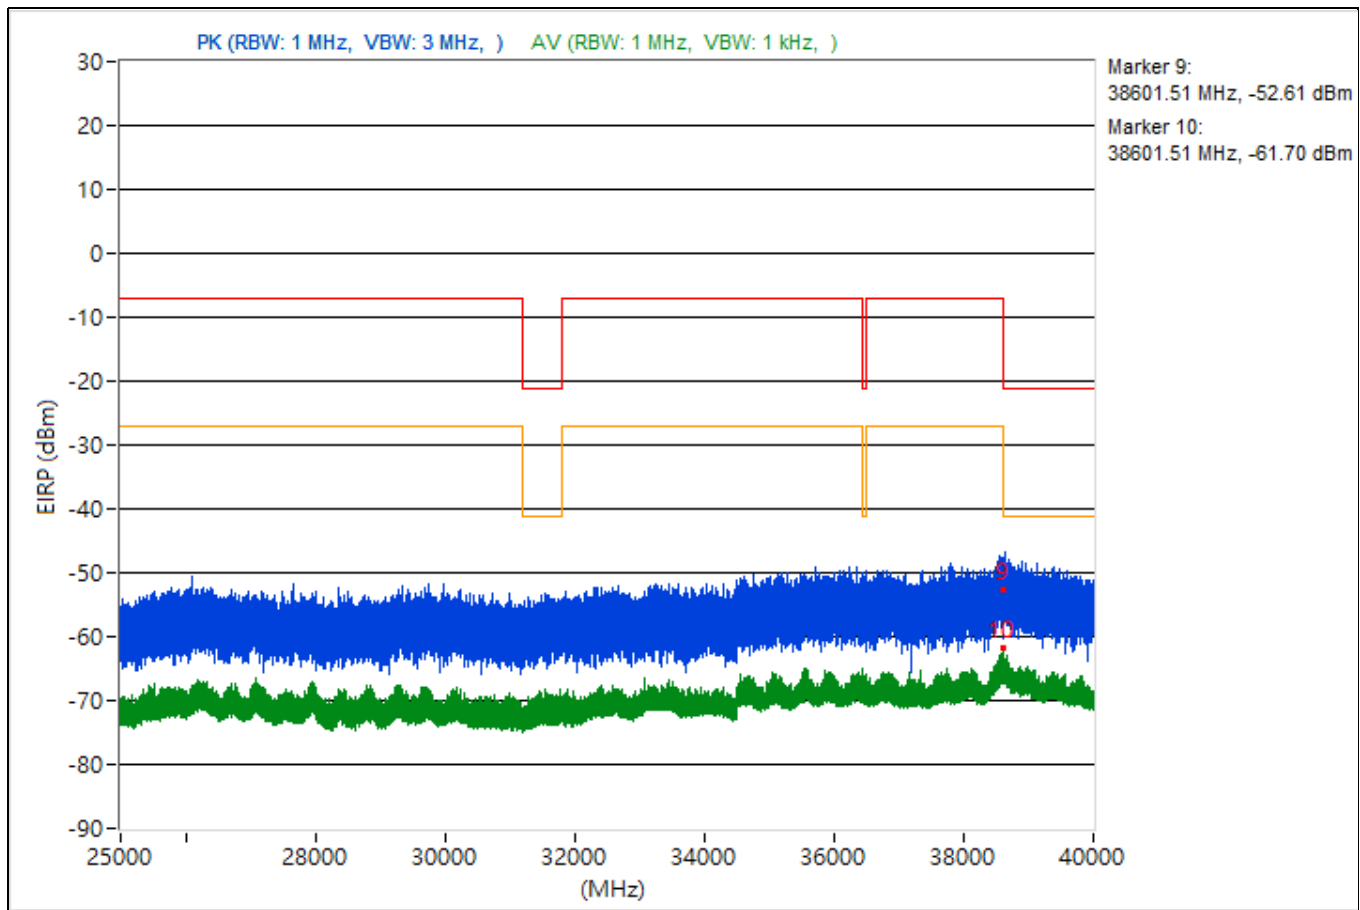


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.11	47.53 PK	74	-26.47	-52.65	4.92	-47.73
2	3754.11	35.43 AV	54	-18.57	-64.75	4.92	-59.83
3	14480	43.4 PK	74	-30.6	-56.78	4.92	-51.86
4	14480	34.53 AV	54	-19.47	-65.65	4.92	-60.73
5	19203.2	43.58 PK	74	-30.42	-56.6	4.92	-51.68
6	19203.2	36.32 AV	54	-17.68	-63.86	4.92	-58.94
7	23823.7	49.48 PK	74	-24.52	-50.7	4.92	-45.78
8	23823.7	36.69 AV	54	-17.31	-63.49	4.92	-58.57
9	38672.09	44.26 PK	74	-29.74	-55.92	4.92	-51
10	38672.09	31.71 AV	54	-22.29	-68.47	4.92	-63.55

Note: Margin value = Emission Level - Limit value

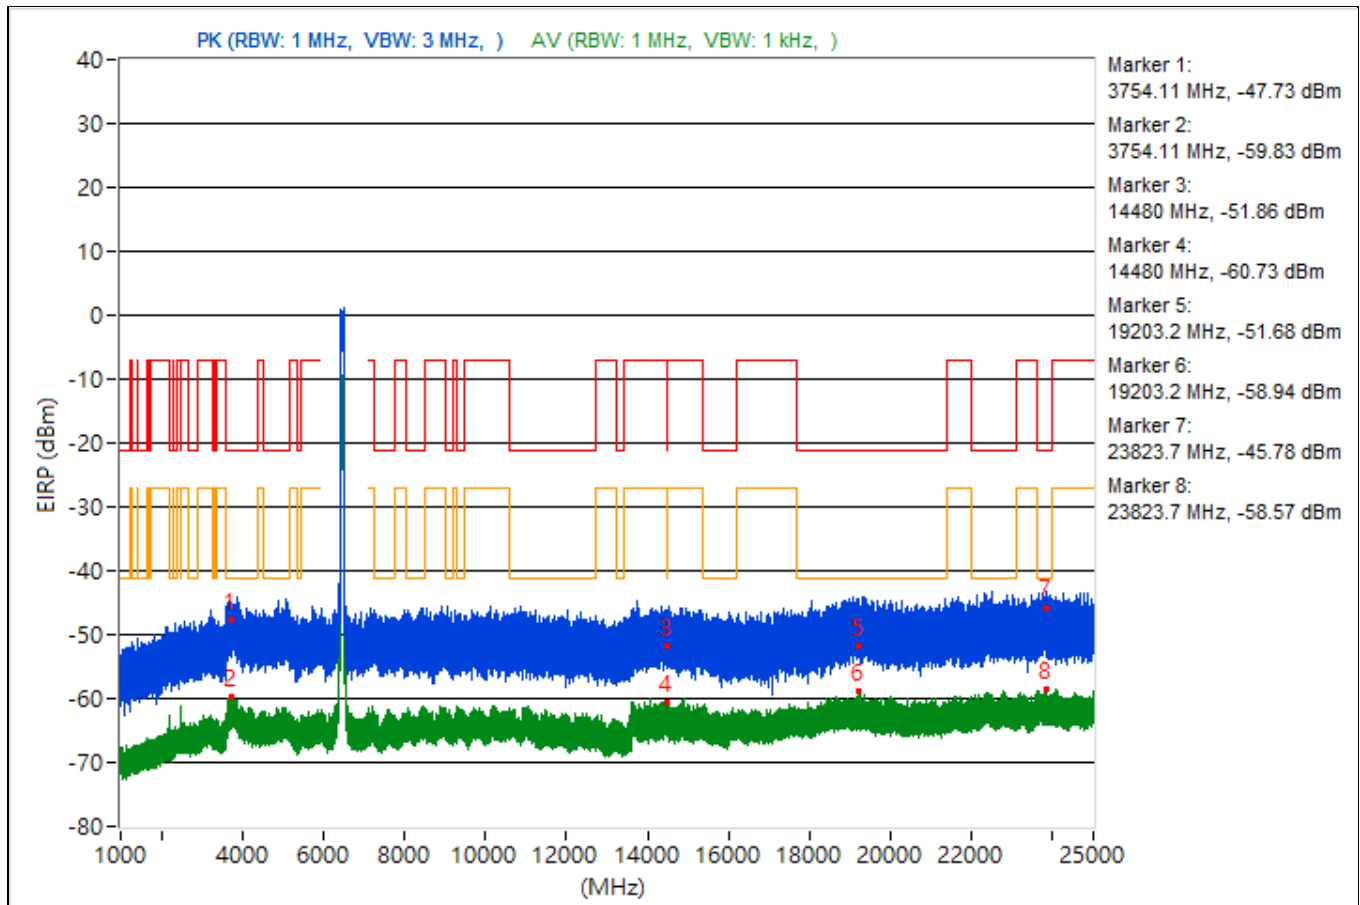


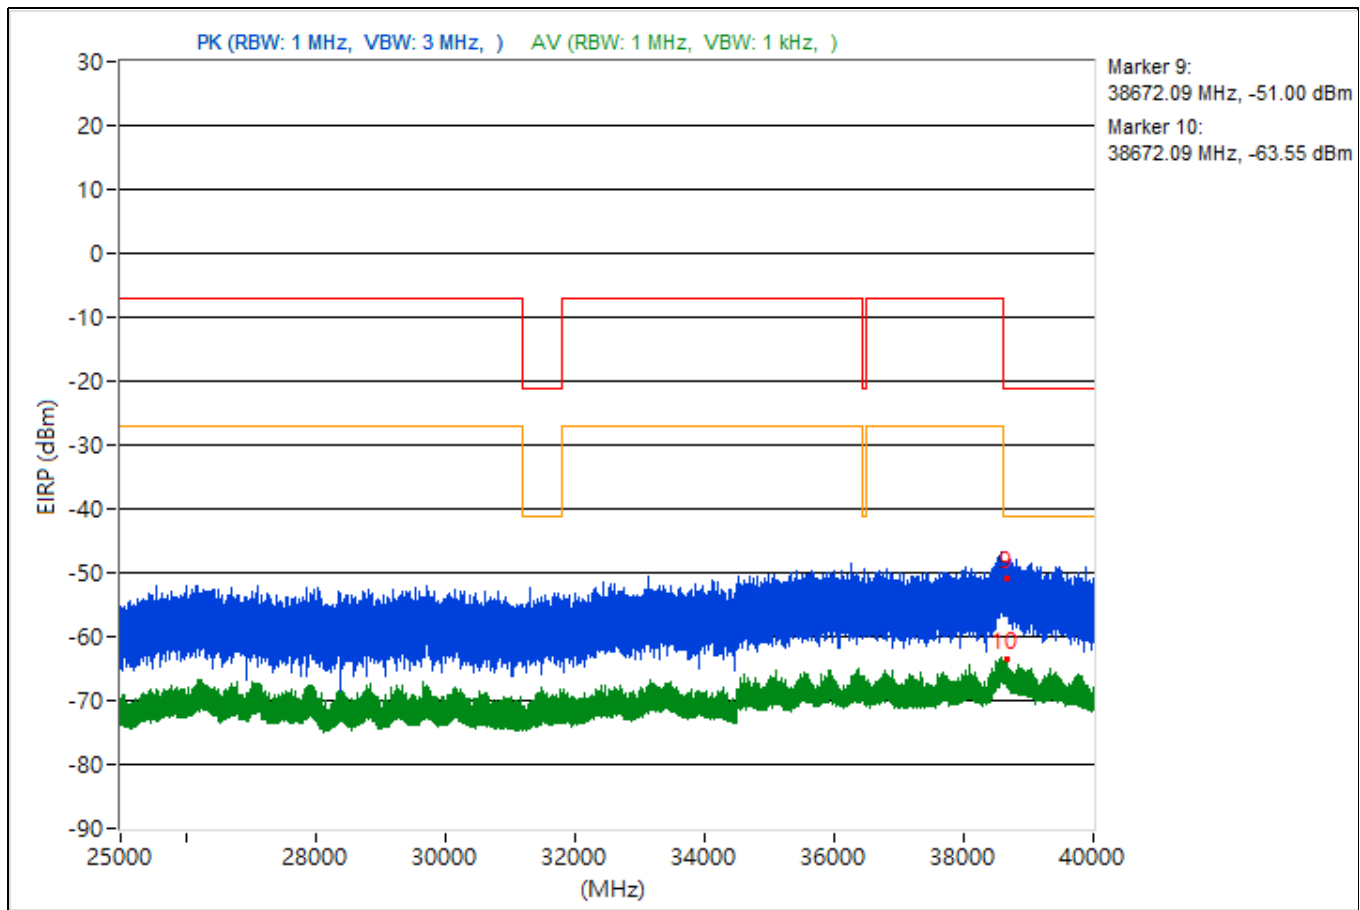


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3780.48	43.18 PK	74	-30.82	-57	4.92	-52.08
2	3780.48	36.57 AV	54	-17.43	-63.61	4.92	-58.69
3	15398.22	43.14 PK	74	-30.86	-57.04	4.92	-52.12
4	15398.22	34.67 AV	54	-19.33	-65.51	4.92	-60.59
5	19253.9	47.24 PK	74	-26.76	-52.94	4.92	-48.02
6	19253.9	36.13 AV	54	-17.87	-64.05	4.92	-59.13
7	23728.2	48.5 PK	74	-25.5	-51.68	4.92	-46.76
8	23728.2	36.93 AV	54	-17.07	-63.25	4.92	-58.33
9	38644.98	45.56 PK	74	-28.44	-54.62	4.92	-49.7
10	38644.98	32.62 AV	54	-21.38	-67.56	4.92	-62.64

Note: Margin value = Emission Level - Limit value

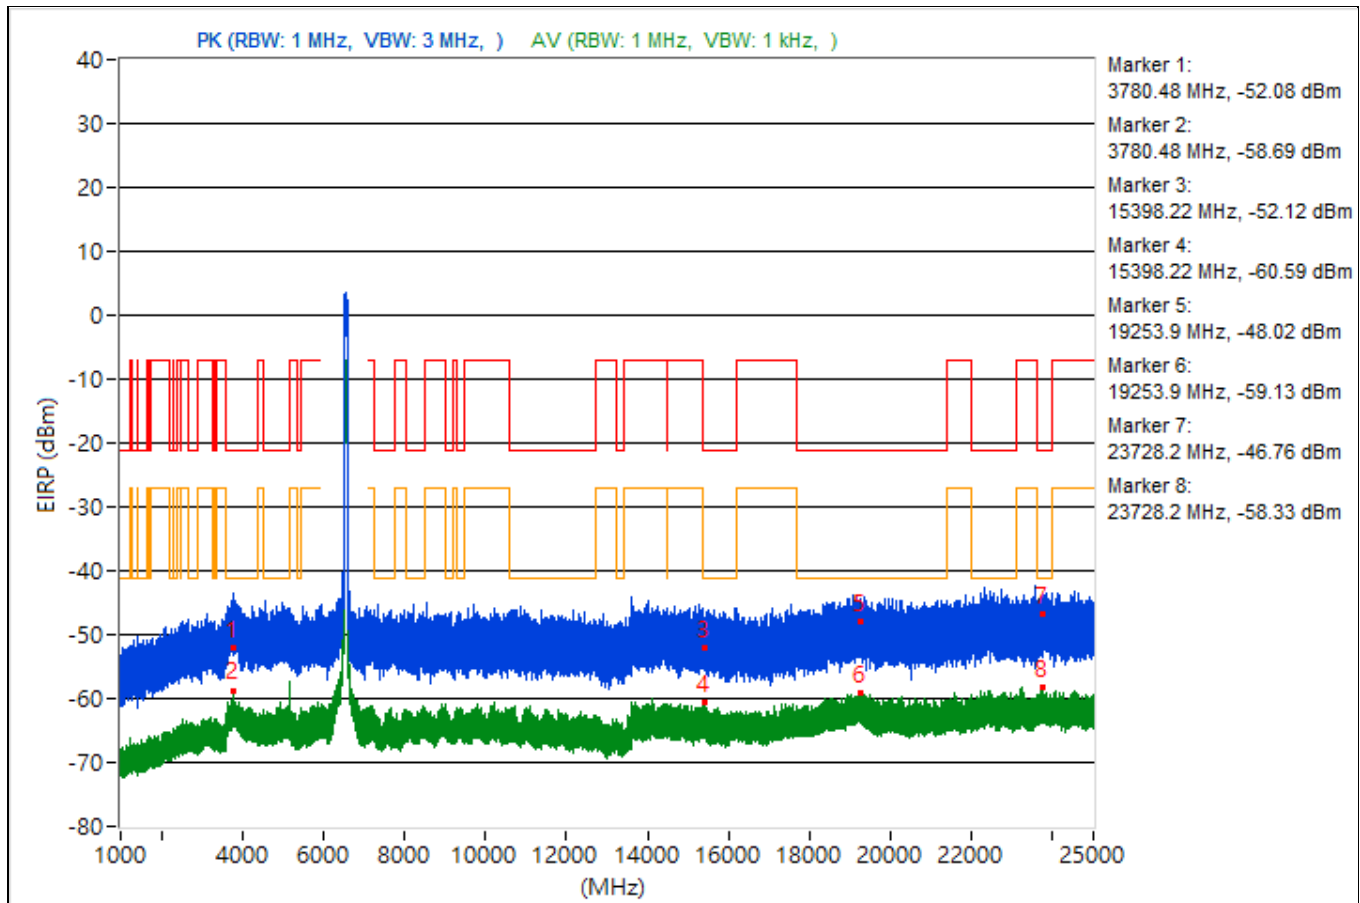


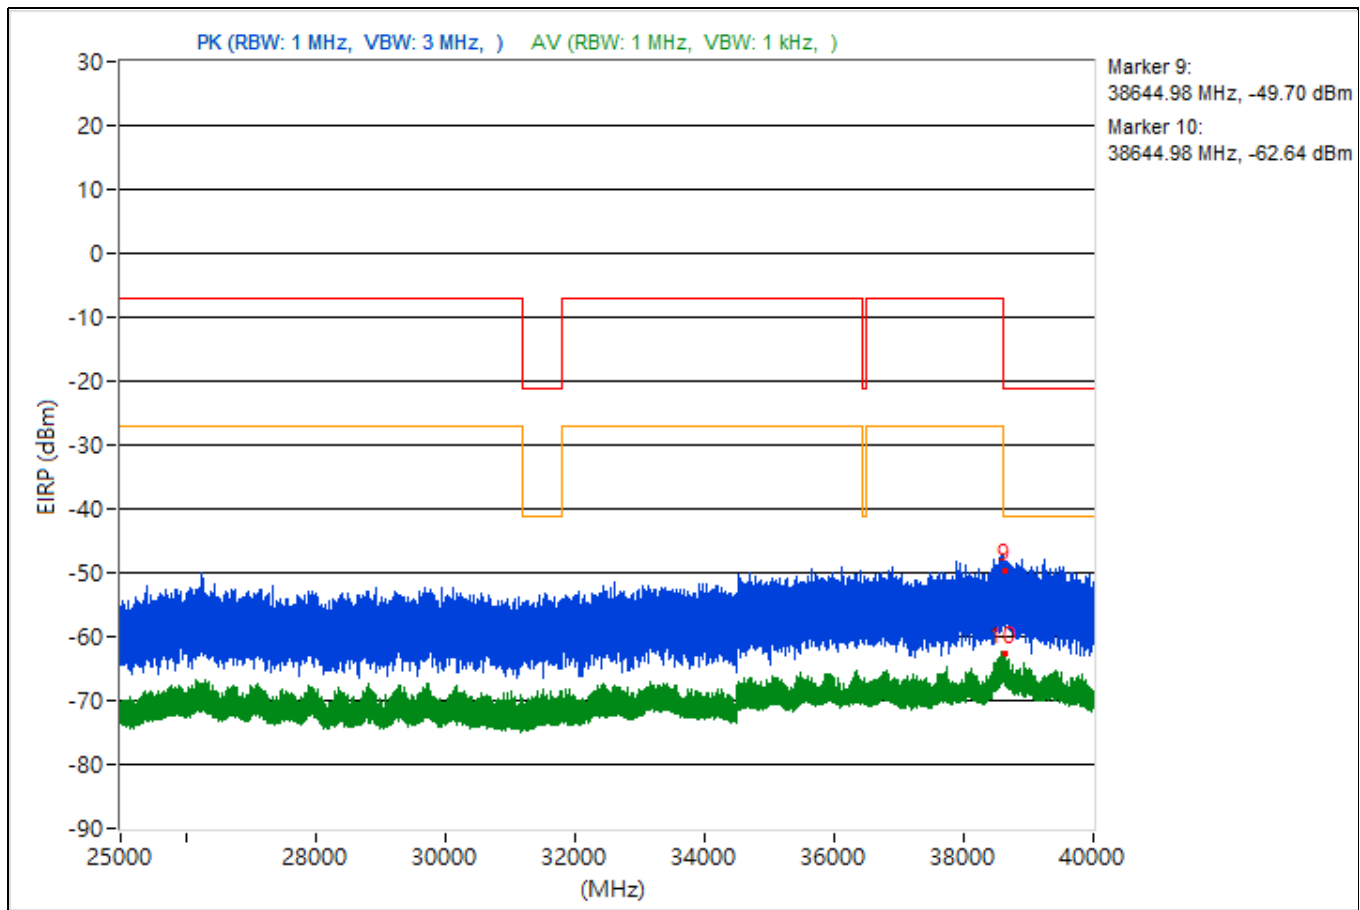


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3837.49	46.97 PK	74	-27.03	-53.21	4.92	-48.29
2	3837.49	35.65 AV	54	-18.35	-64.53	4.92	-59.61
3	10954.49	43.3 PK	74	-30.7	-56.88	4.92	-51.96
4	10954.49	34.64 AV	54	-19.36	-65.54	4.92	-60.62
5	19074.8	45.63 PK	74	-28.37	-54.55	4.92	-49.63
6	19074.8	35.92 AV	54	-18.08	-64.26	4.92	-59.34
7	23710.2	47.36 PK	74	-26.64	-52.82	4.92	-47.9
8	23710.2	36.99 AV	54	-17.01	-63.19	4.92	-58.27
9	38646.67	41.56 PK	74	-32.44	-58.62	4.92	-53.7
10	38646.67	32.84 AV	54	-21.16	-67.34	4.92	-62.42

Note: Margin value = Emission Level - Limit value

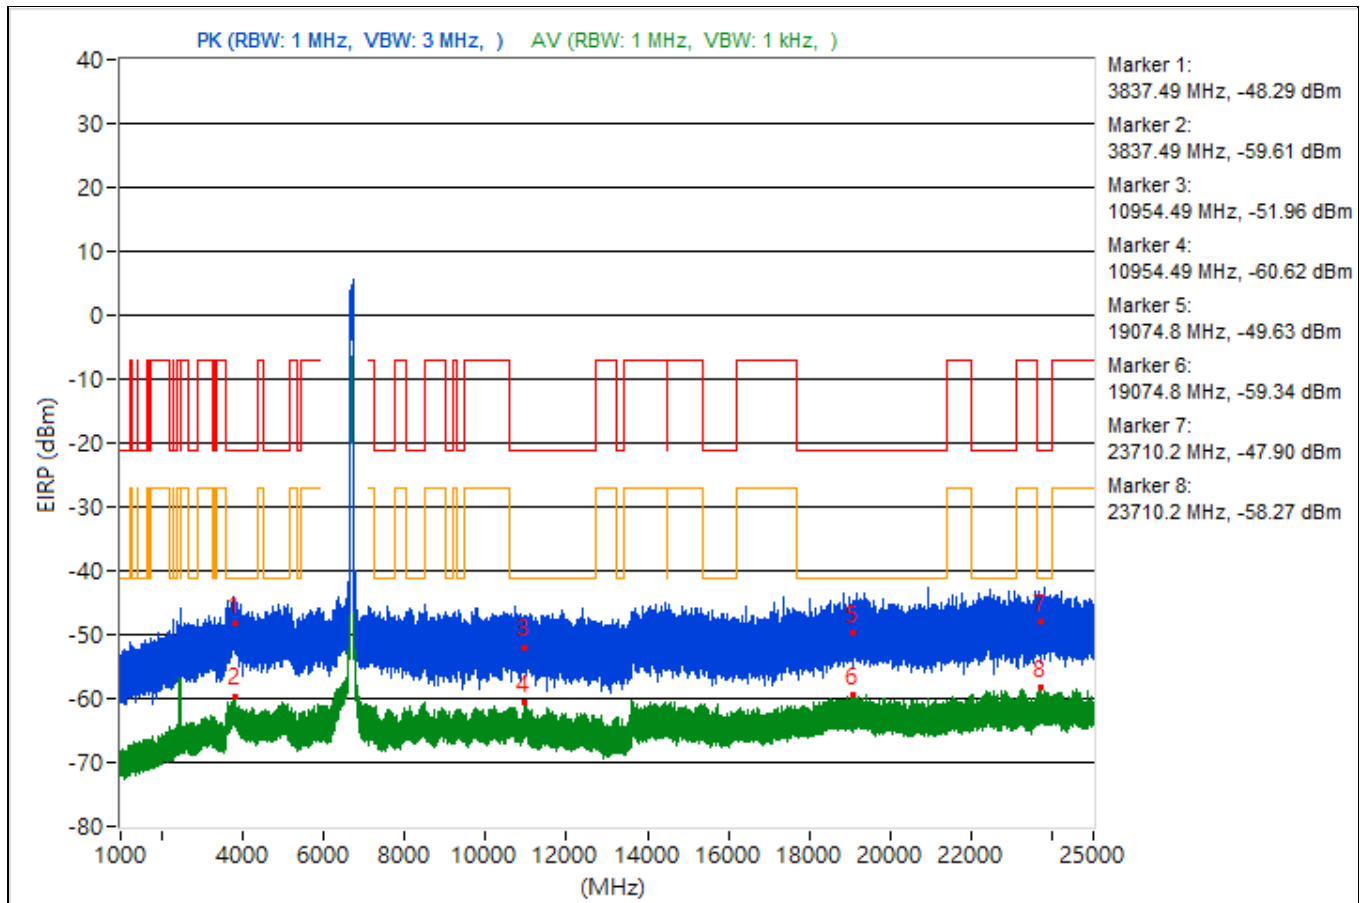


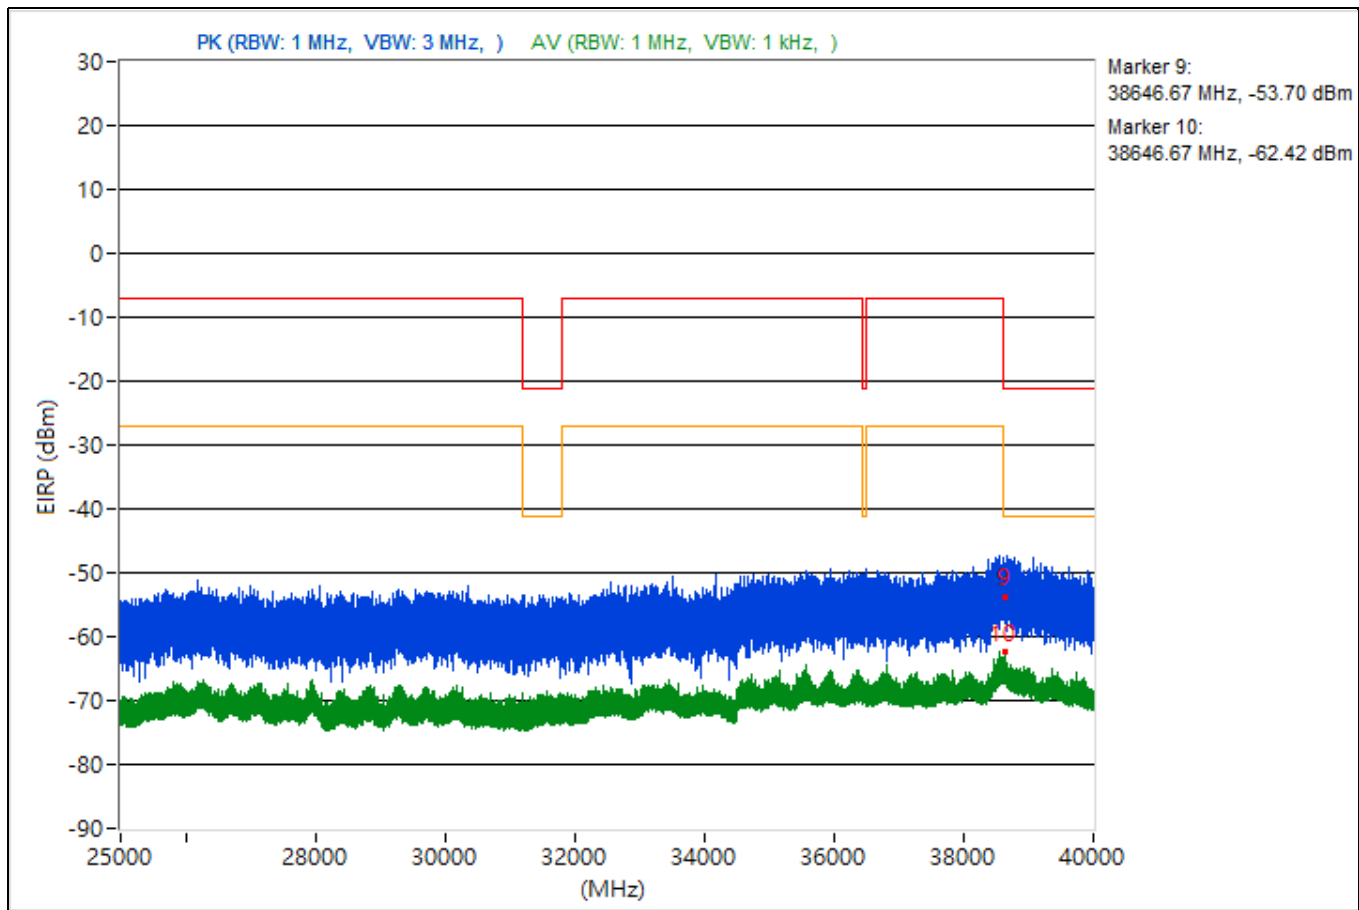


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3737.78	47.2 PK	74	-26.8	-52.98	4.92	-48.06
2	3737.78	35.76 AV	54	-18.24	-64.42	4.92	-59.5
3	15353.87	44.06 PK	74	-29.94	-56.12	4.92	-51.2
4	15353.87	34.67 AV	54	-19.33	-65.51	4.92	-60.59
5	19103	48.93 PK	74	-25.07	-51.25	4.92	-46.33
6	19103	36.35 AV	54	-17.65	-63.83	4.92	-58.91
7	23788.4	50.17 PK	74	-23.83	-50.01	4.92	-45.09
8	23788.4	36.75 AV	54	-17.25	-63.43	4.92	-58.51
9	38649.51	40 PK	74	-34	-60.18	4.92	-55.26
10	38649.51	32.96 AV	54	-21.04	-67.22	4.92	-62.3

Note: Margin value = Emission Level - Limit value

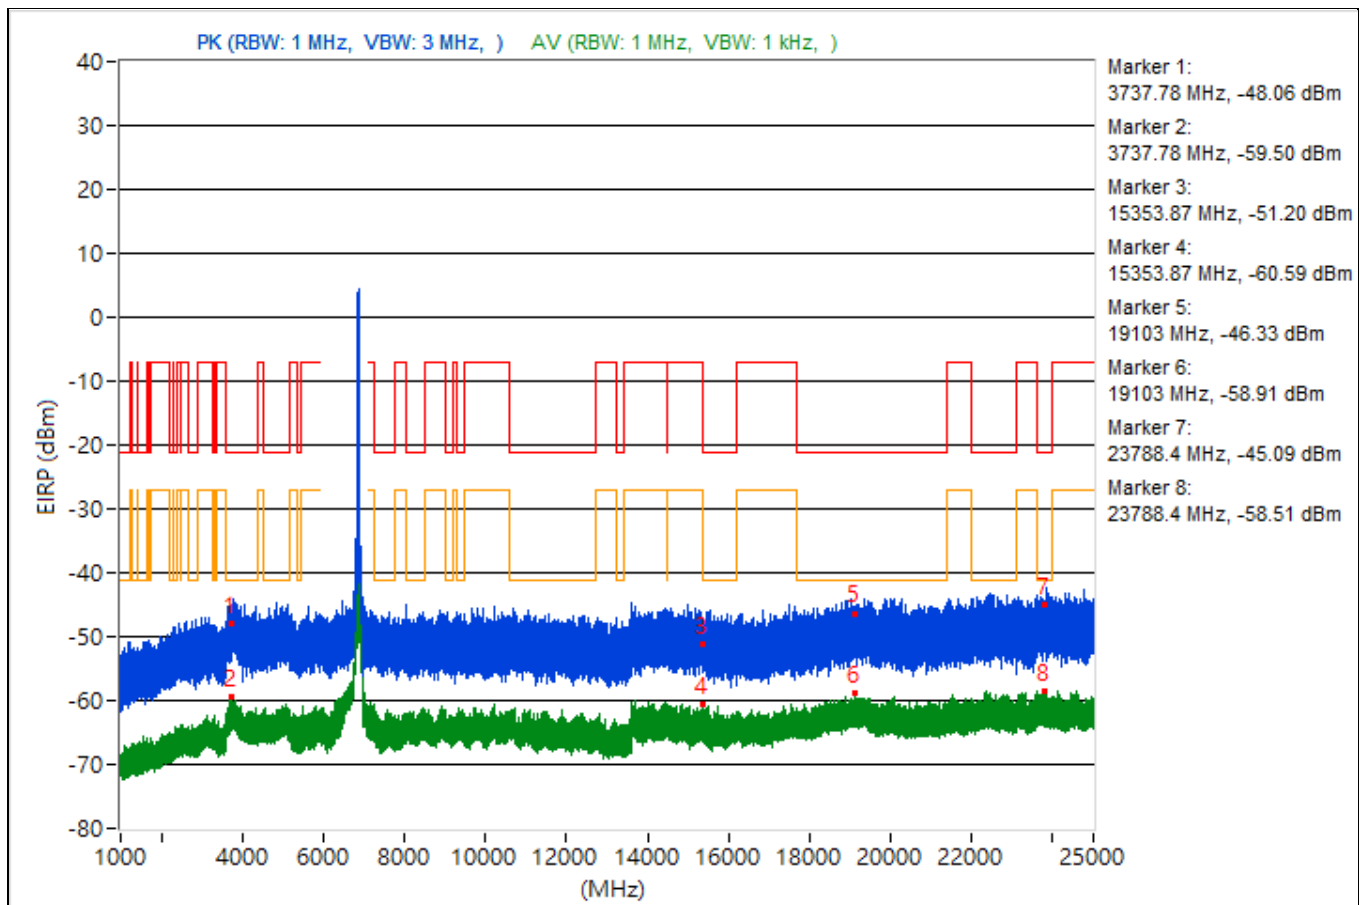


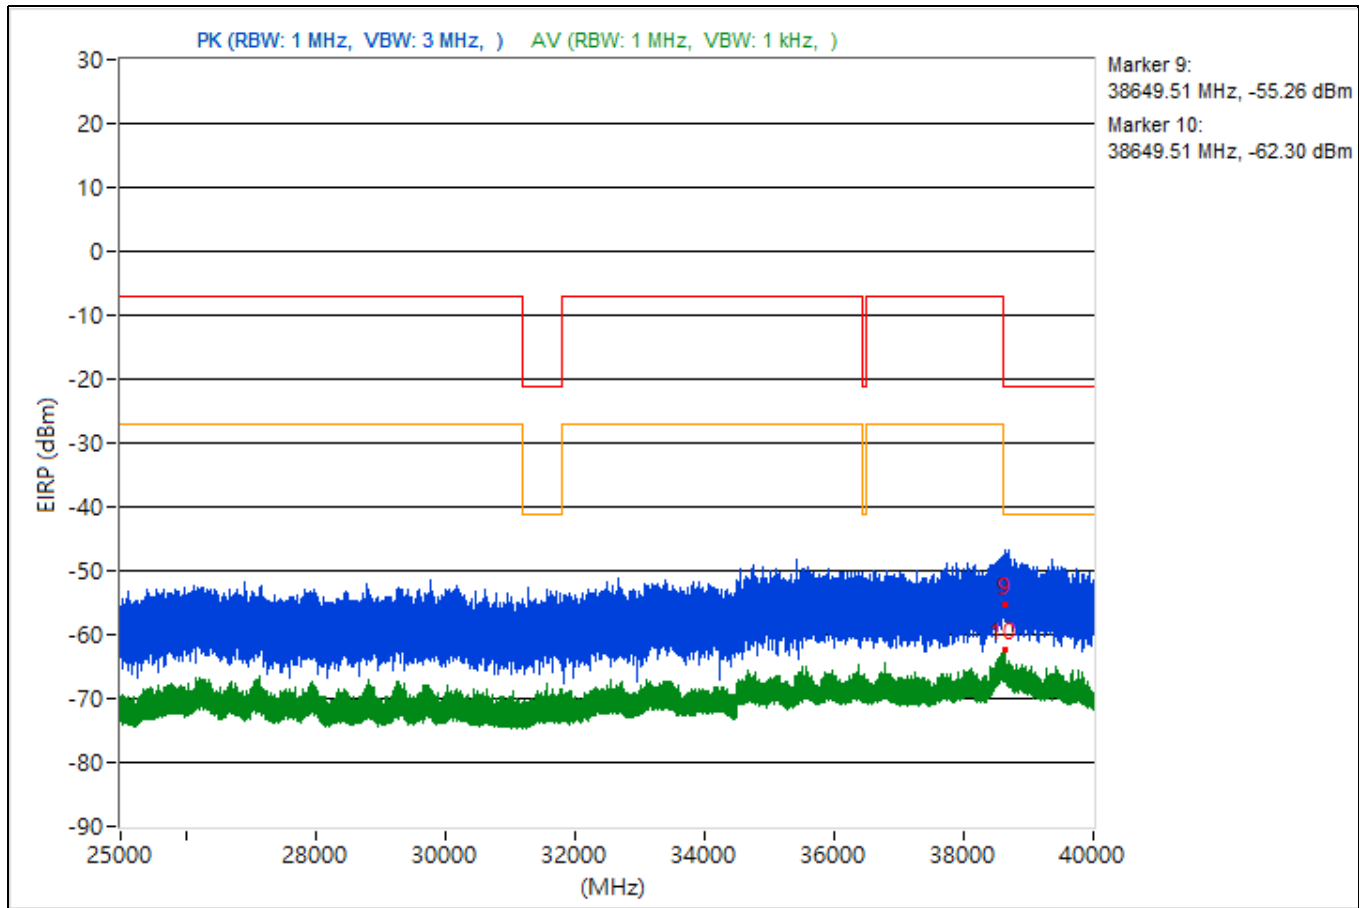


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.21	46.3 PK	74	-27.7	-53.88	4.92	-48.96
2	3756.21	35.4 AV	54	-18.6	-64.78	4.92	-59.86
3	8465.16	43.91 PK	74	-30.09	-56.27	4.92	-51.35
4	8465.16	34.68 AV	54	-19.32	-65.5	4.92	-60.58
5	18771.7	48.6 PK	74	-25.4	-51.58	4.92	-46.66
6	18771.7	35.74 AV	54	-18.26	-64.44	4.92	-59.52
7	22432.5	45.72 PK	74	-28.28	-54.46	4.92	-49.54
8	22432.5	36.48 AV	54	-17.52	-63.7	4.92	-58.78
9	38612.44	41.77 PK	74	-32.23	-58.41	4.92	-53.49
10	38612.44	32 AV	54	-22	-68.18	4.92	-63.26

Note: Margin value = Emission Level - Limit value

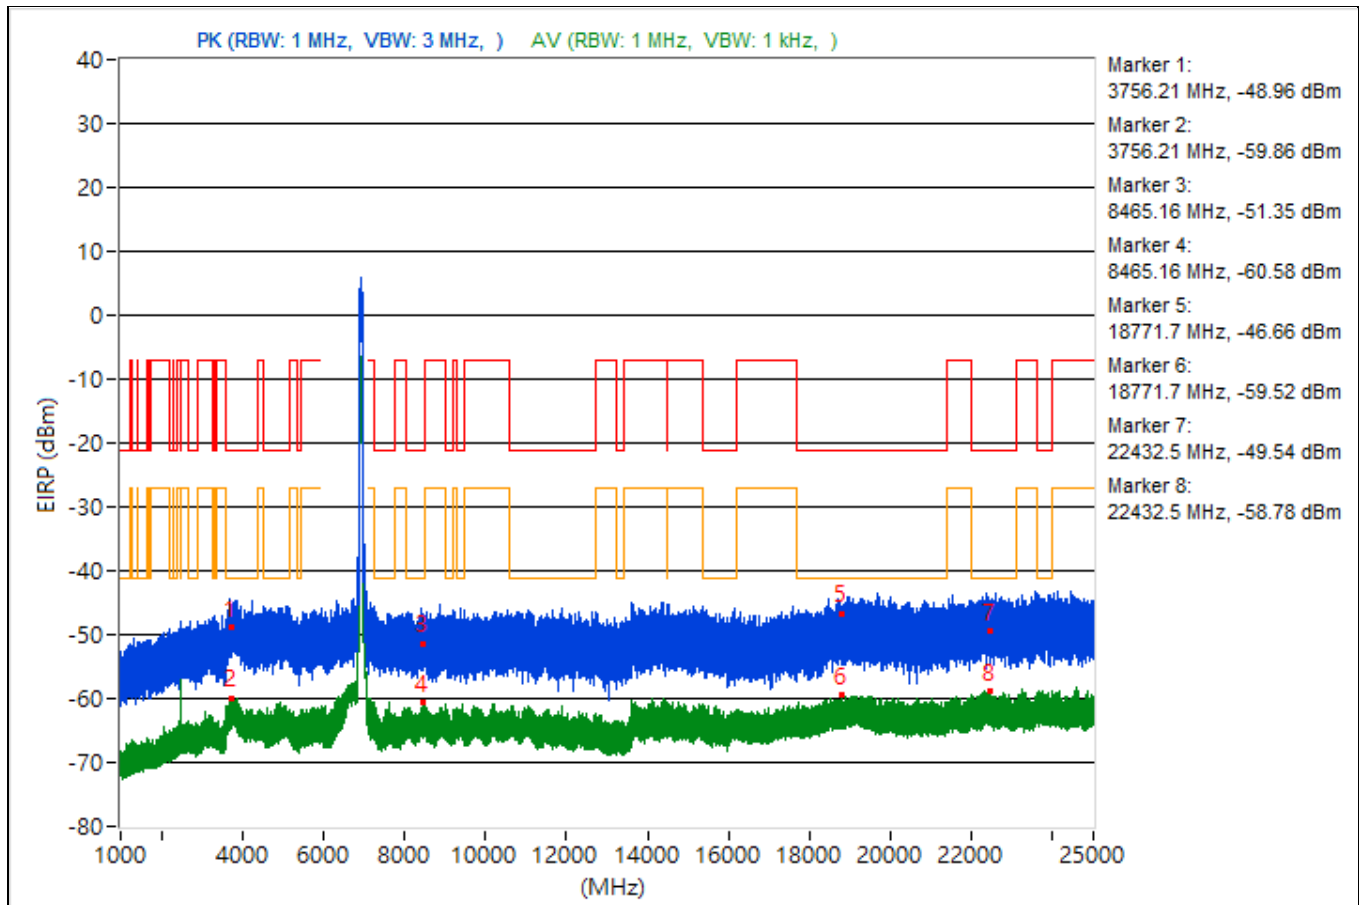


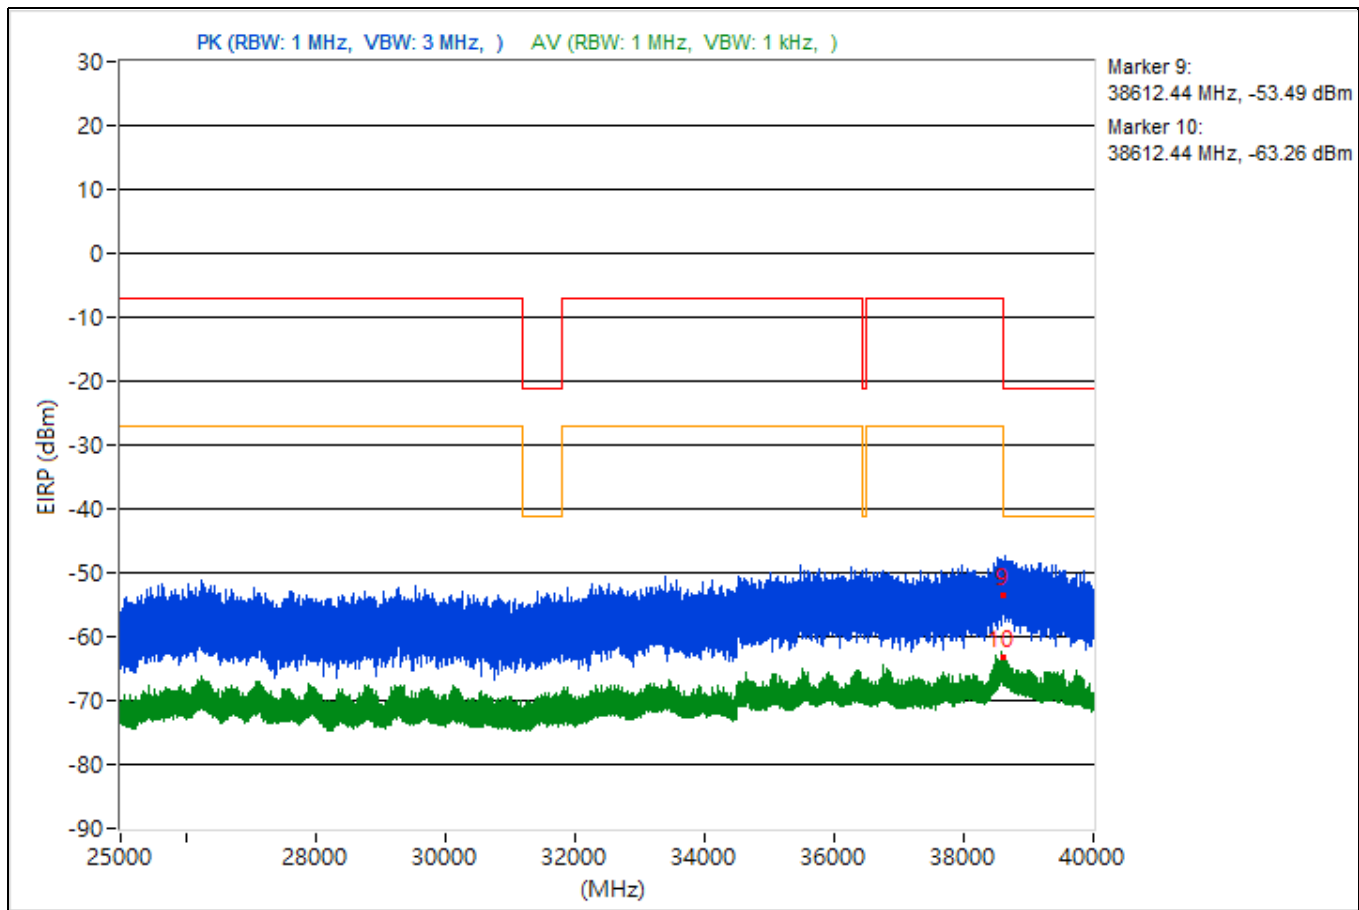


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3744.31	46.75 PK	74	-27.25	-53.43	4.92	-48.51
2	3744.31	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	14480.8	45.29 PK	74	-28.71	-54.89	4.92	-49.97
4	14480.8	34.93 AV	54	-19.07	-65.25	4.92	-60.33
5	18911.3	45.75 PK	74	-28.25	-54.43	4.92	-49.51
6	18911.3	36.07 AV	54	-17.93	-64.11	4.92	-59.19
7	22403.3	45.6 PK	74	-28.4	-54.58	4.92	-49.66
8	22403.3	36.43 AV	54	-17.57	-63.75	4.92	-58.83
9	38632.36	41.27 PK	74	-32.73	-58.91	4.92	-53.99
10	38632.36	32.51 AV	54	-21.49	-67.67	4.92	-62.75

Note: Margin value = Emission Level - Limit value

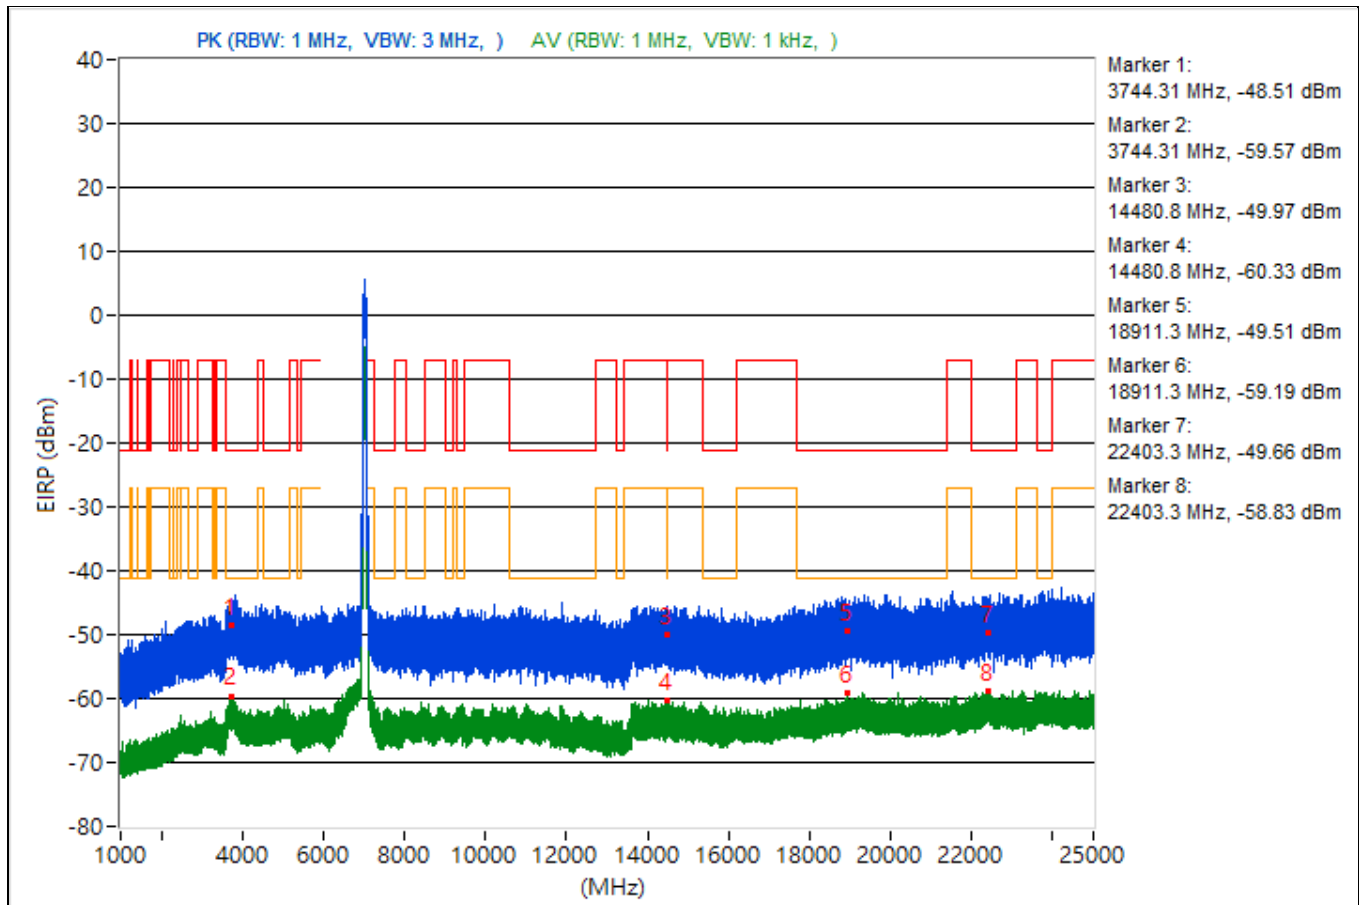

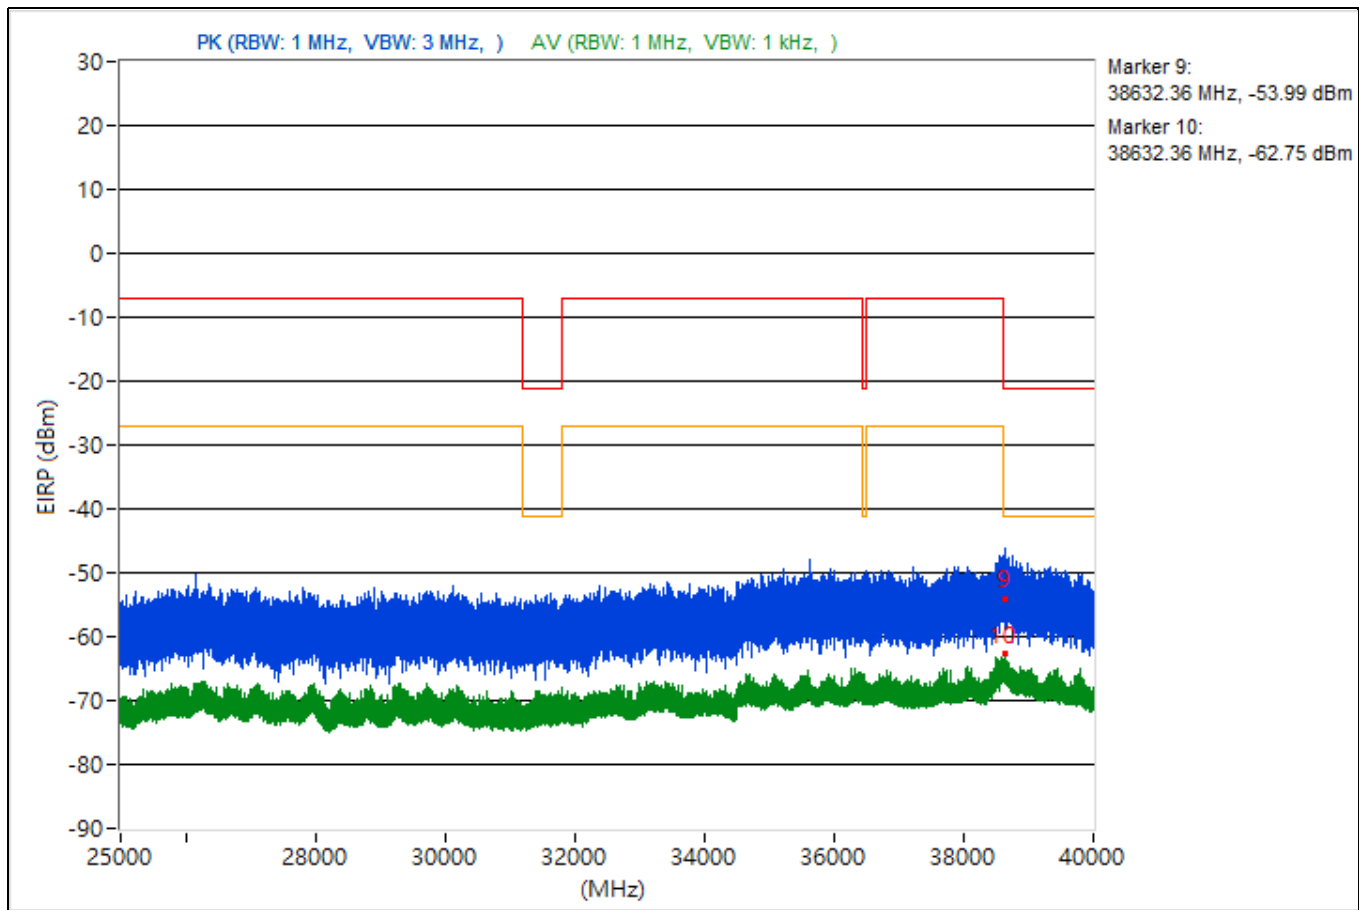

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3723	45.41 PK	74	-28.59	-54.77	4.92	-49.85
2	3723	35.24 AV	54	-18.76	-64.94	4.92	-60.02
3	15463.2	42.46 PK	74	-31.54	-57.72	4.92	-52.8
4	15463.2	34.46 AV	54	-19.54	-65.72	4.92	-60.8
5	19304.4	43.42 PK	74	-30.58	-56.76	4.92	-51.84
6	19304.4	36.7 AV	54	-17.3	-63.48	4.92	-58.56
7	22463.2	46.85 PK	74	-27.15	-53.33	4.92	-48.41
8	22463.2	36.46 AV	54	-17.54	-63.72	4.92	-58.8
9	38660.71	41.31 PK	74	-32.69	-58.87	4.92	-53.95
10	38660.71	31.51 AV	54	-22.49	-68.67	4.92	-63.75

Note: Margin value = Emission Level - Limit value

