



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.7	49.85 PK	74	-24.15	-55.59	-51.87	4.92	-45.41
2	3807.7	37.64 AV	54	-16.36	-68.36	-63.87	4.92	-57.62
3	14499.91	48.19 PK	74	-25.81	-54.42	-55.66	4.92	-47.07
4	14499.91	37.43 AV	54	-16.57	-65.22	-66.39	4.92	-57.83
5	19048.3	48.14 PK	74	-25.86	-56.72	-53.84	4.92	-47.12
6	19048.3	38.63 AV	54	-15.37	-63.19	-66.56	4.92	-56.63
7	23693.1	51.12 PK	74	-22.88	-50.08	-55.84	4.92	-44.14
8	23693.1	39.61 AV	54	-14.39	-65.49	-62.26	4.92	-55.65
9	38615.73	46.52 PK	74	-27.48	-57.08	-56.29	4.92	-48.74
10	38615.73	36.67 AV	54	-17.33	-65.75	-67.46	4.92	-58.59

Note: Margin value = Emission Level - Limit value

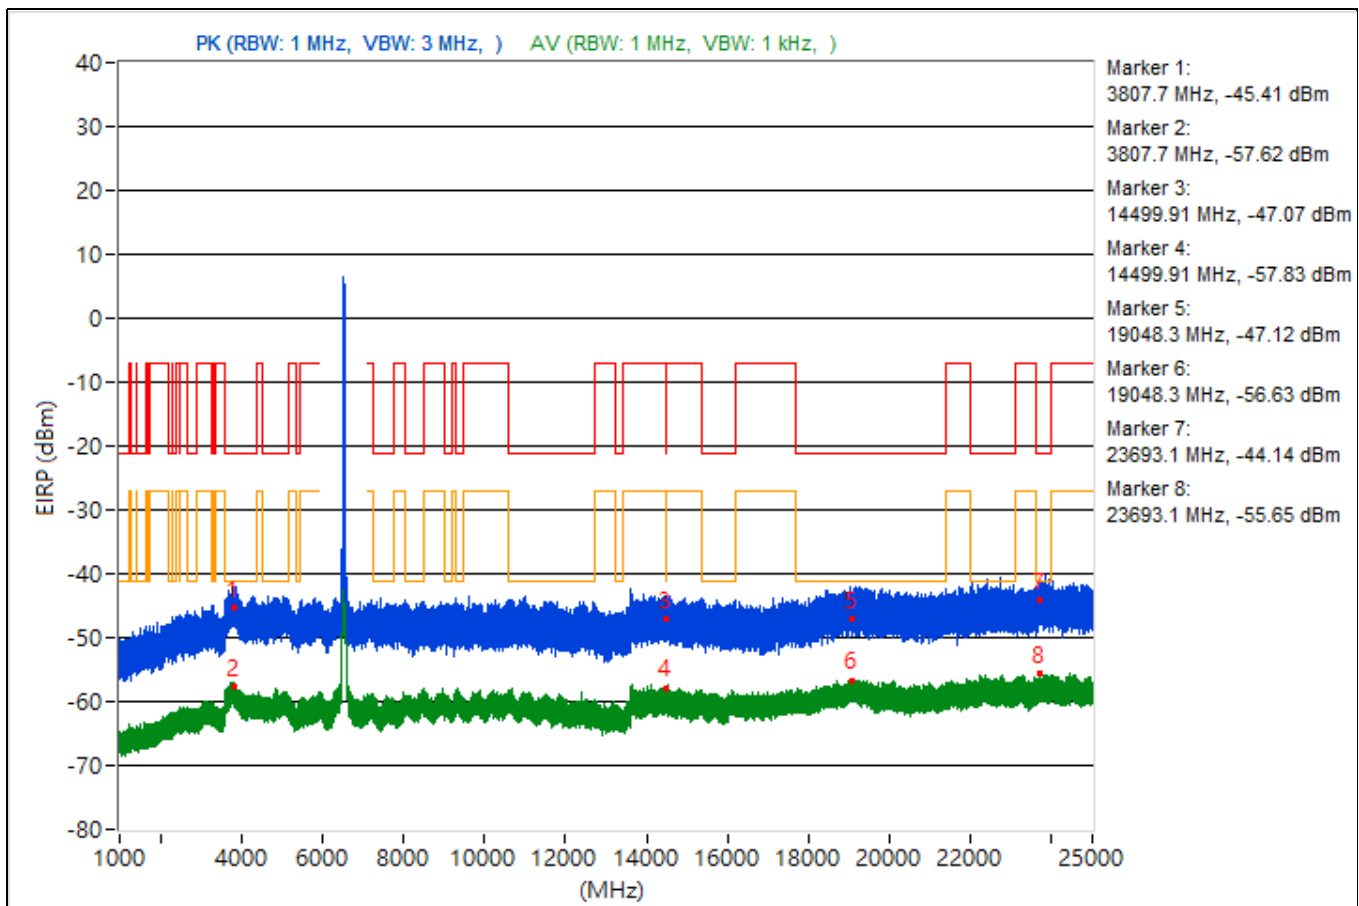


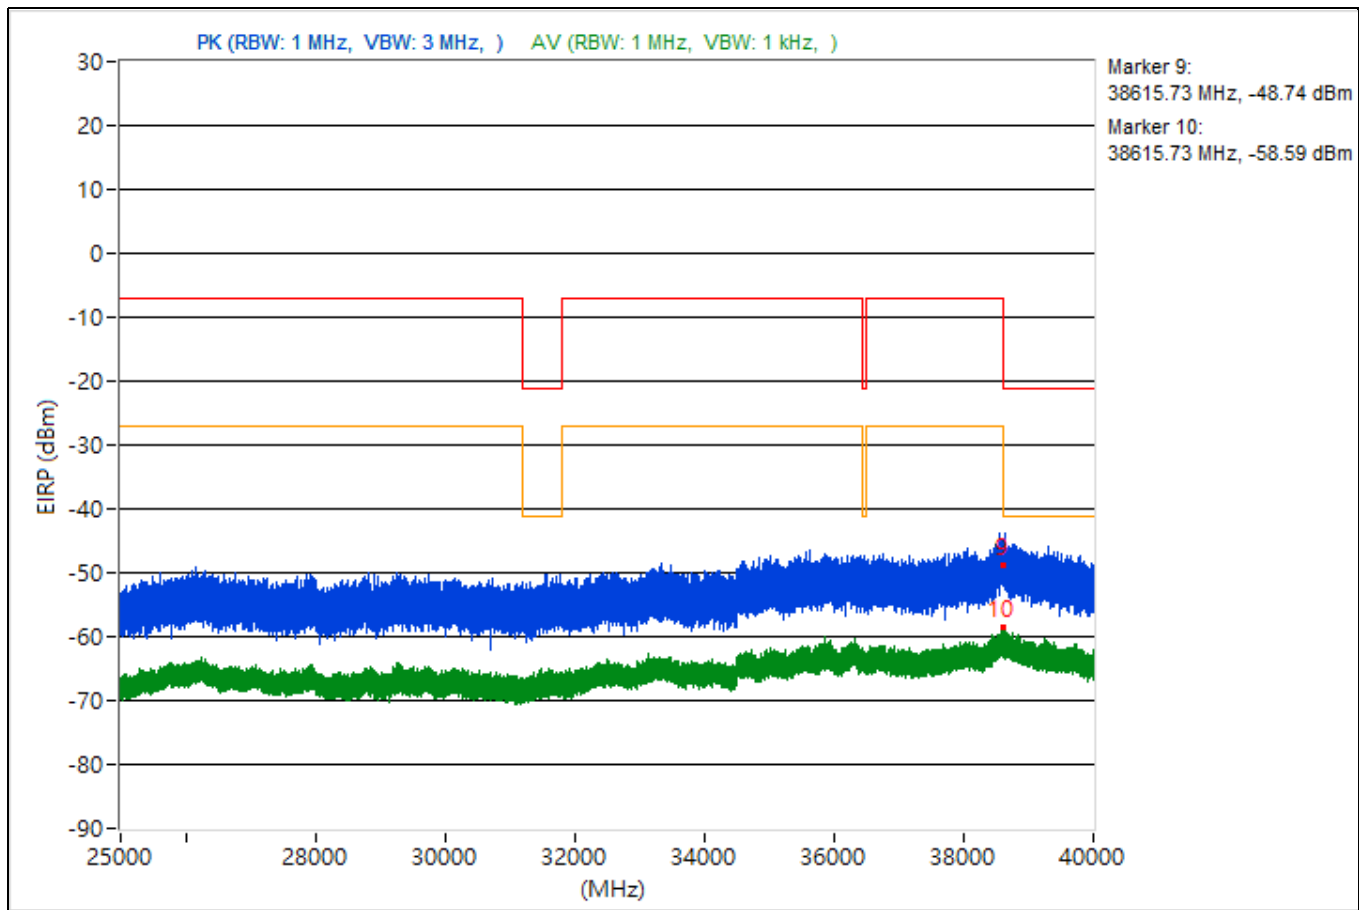


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.29	50.76 PK	74	-23.24	-52.81	-52.08	4.92	-44.5
2	3798.29	38.4 AV	54	-15.6	-63.7	-66.25	4.92	-56.86
3	10662.13	47.55 PK	74	-26.45	-54.98	-56.41	4.92	-47.71
4	10662.13	37.38 AV	54	-16.62	-67.11	-64.81	4.92	-57.88
5	19332.6	49.71 PK	74	-24.29	-56.21	-51.82	4.92	-45.55
6	19332.6	39.3 AV	54	-14.7	-63.08	-64.89	4.92	-55.96
7	23878.6	51.28 PK	74	-22.72	-51.28	-52.66	4.92	-43.98
8	23878.6	39.59 AV	54	-14.41	-66.19	-61.99	4.92	-55.67
9	38626.13	47.54 PK	74	-26.46	-55.43	-55.9	4.92	-47.72
10	38626.13	35.88 AV	54	-18.12	-69.74	-65.76	4.92	-59.38

Note: Margin value = Emission Level - Limit value

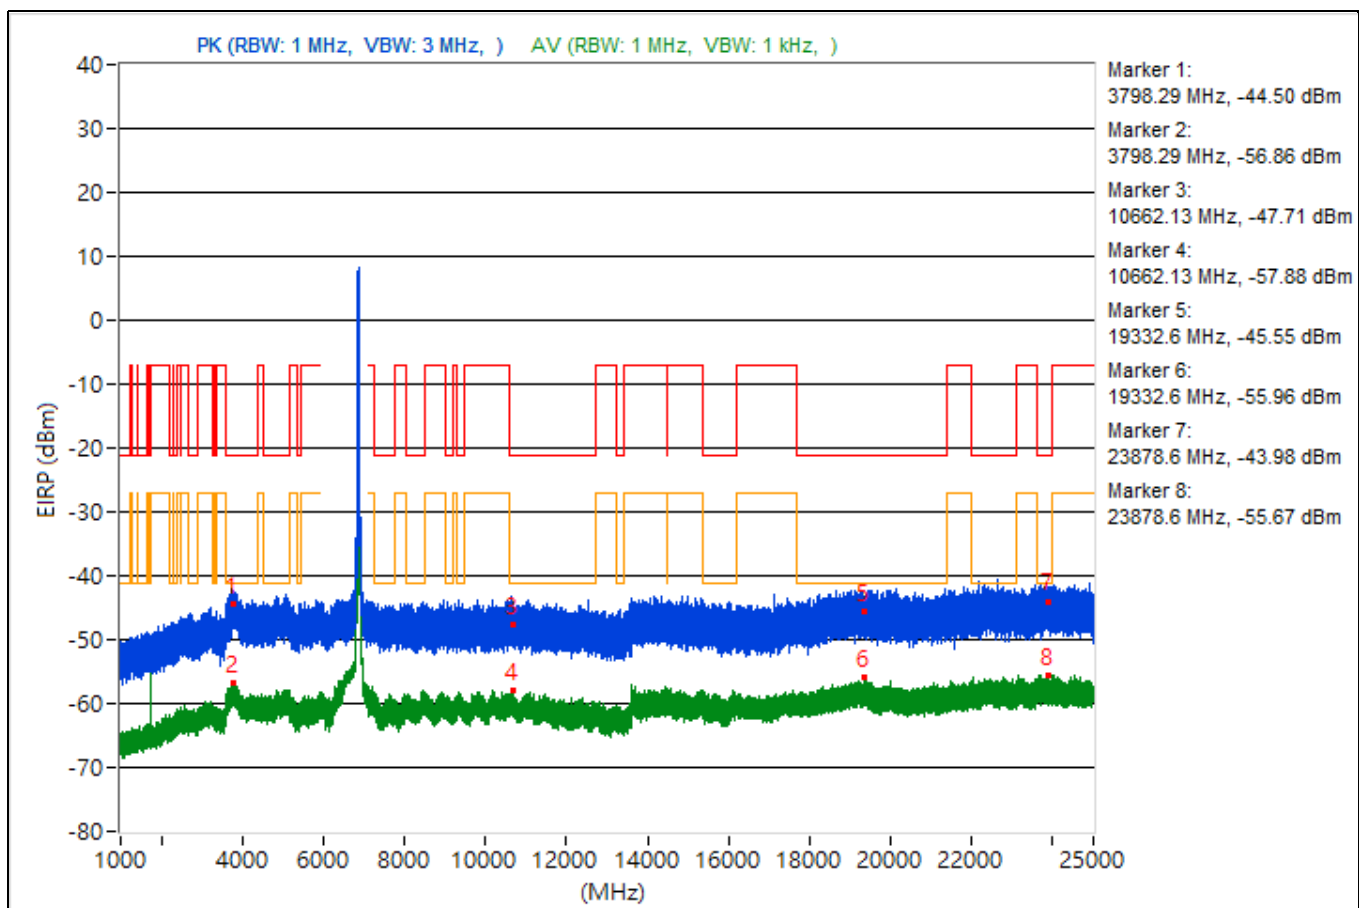


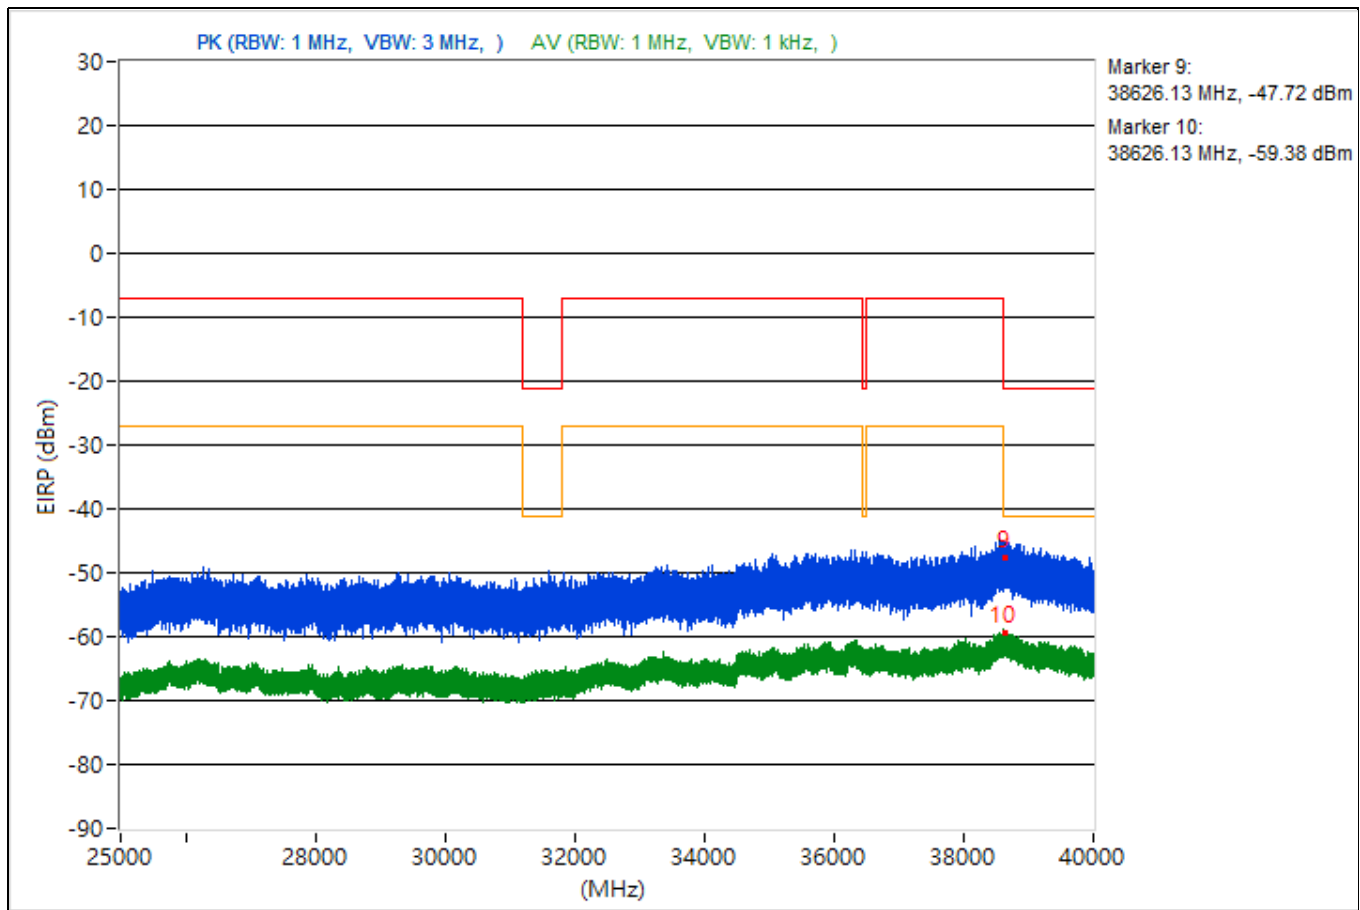


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3730.78	50.29 PK	74	-23.71	-52.45	-53.42	4.92	-44.97
2	3730.78	38.91 AV	54	-15.09	-63.73	-64.91	4.92	-56.35
3	14489.6	45.87 PK	74	-28.13	-58.49	-56.4	4.92	-49.39
4	14489.6	37.35 AV	54	-16.65	-68.08	-64.37	4.92	-57.91
5	19319.5	46.59 PK	74	-27.41	-55.55	-57.98	4.92	-48.67
6	19319.5	38.51 AV	54	-15.49	-63.52	-66.28	4.92	-56.75
7	23866.2	52.3 PK	74	-21.7	-50.95	-50.83	4.92	-42.96
8	23866.2	39.5 AV	54	-14.5	-62.6	-65.17	4.92	-55.76
9	38621.42	44.56 PK	74	-29.44	-58.24	-59.07	4.92	-50.7
10	38621.42	36.11 AV	54	-17.89	-65.54	-69.51	4.92	-59.15

Note: Margin value = Emission Level - Limit value

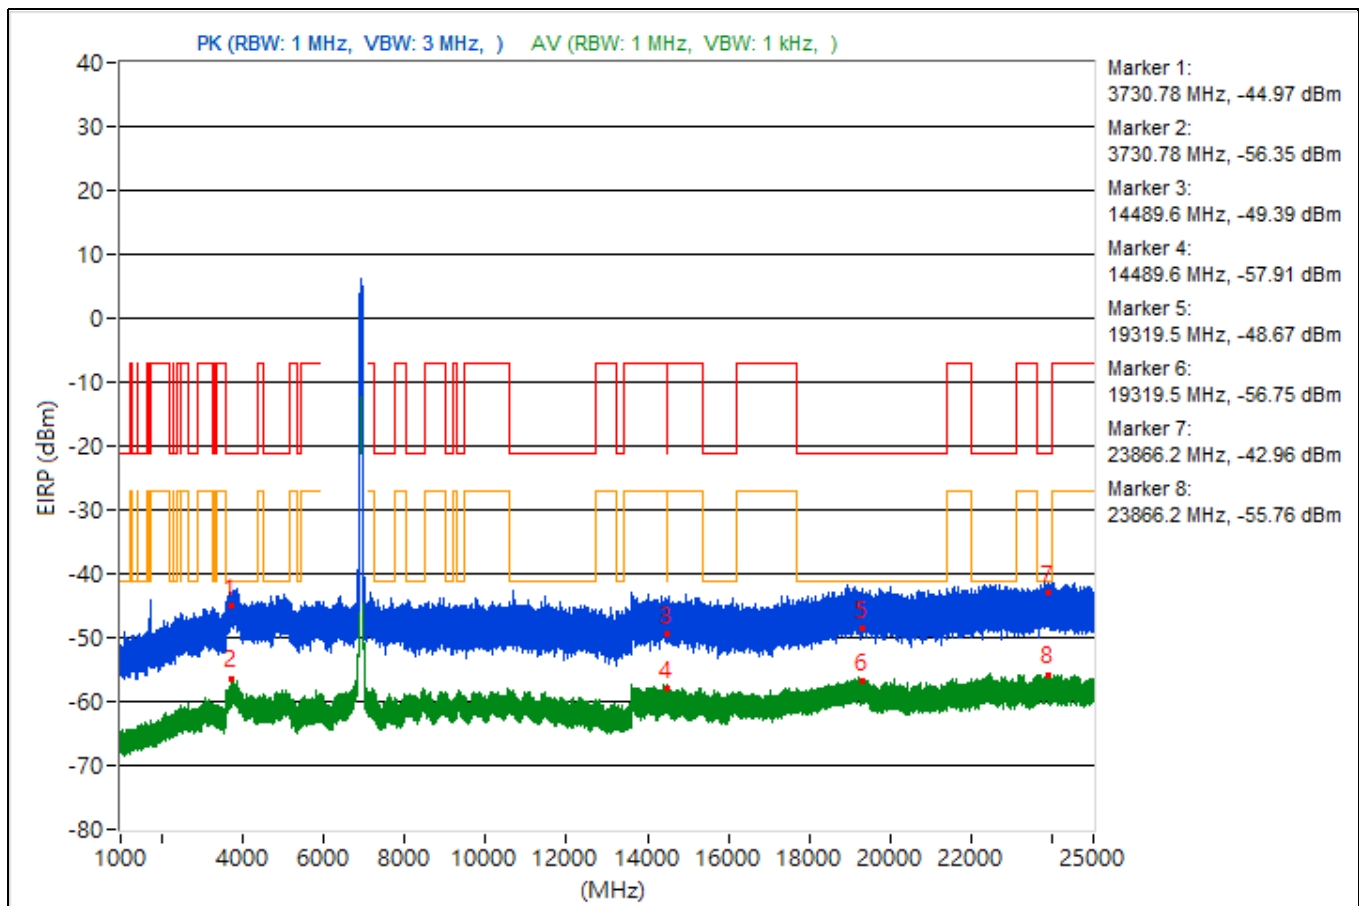


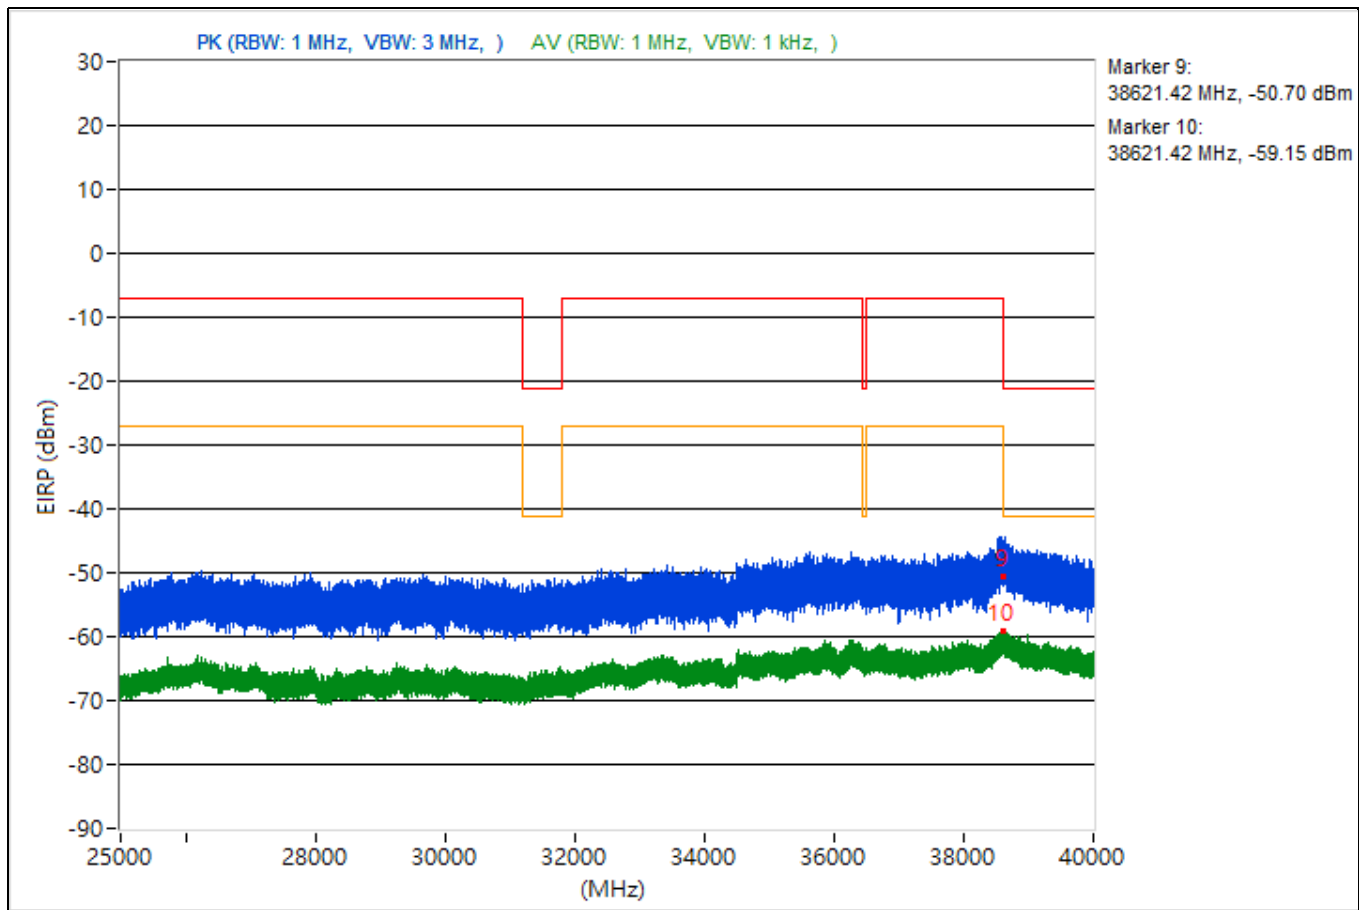


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.31	49.57 PK	74	-24.43	-53.29	-53.98	4.92	-45.69
2	3786.31	37.71 AV	54	-16.29	-64.15	-67.39	4.92	-57.55
3	15428	46.63 PK	74	-27.37	-55.7	-57.63	4.92	-48.63
4	15428	36.87 AV	54	-17.13	-68.5	-64.88	4.92	-58.39
5	19160	49.93 PK	74	-24.07	-52.4	-54.32	4.92	-45.33
6	19160	38.86 AV	54	-15.14	-65.76	-63.25	4.92	-56.4
7	23853.4	48.95 PK	74	-25.05	-54.19	-54.29	4.92	-46.31
8	23853.4	39.5 AV	54	-14.5	-62.67	-65.03	4.92	-55.76
9	38609.33	45.35 PK	74	-28.65	-58.54	-57.24	4.92	-49.91
10	38609.33	36.4 AV	54	-17.6	-65.22	-69.27	4.92	-58.86

Note: Margin value = Emission Level - Limit value

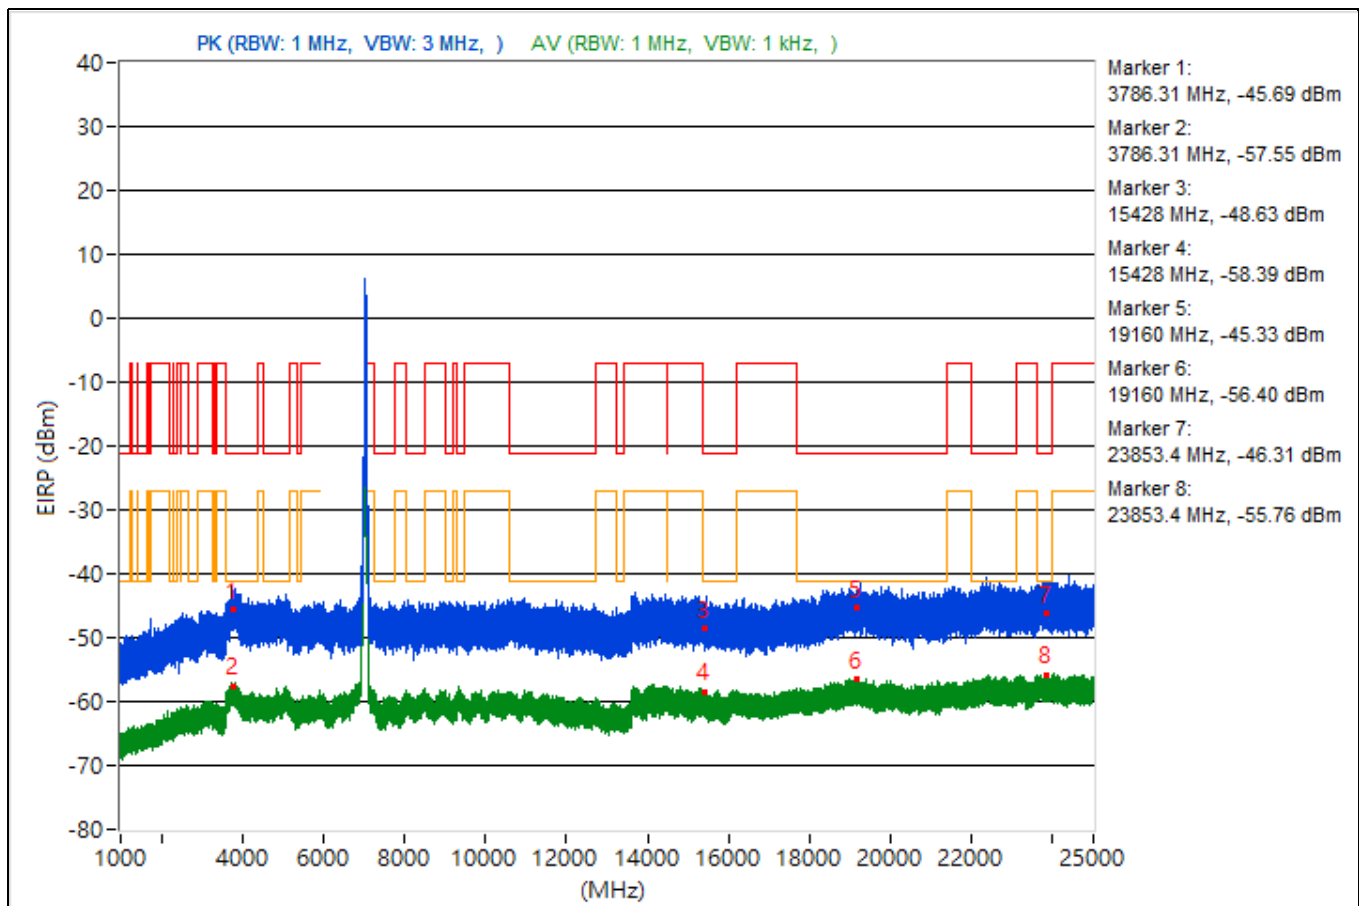


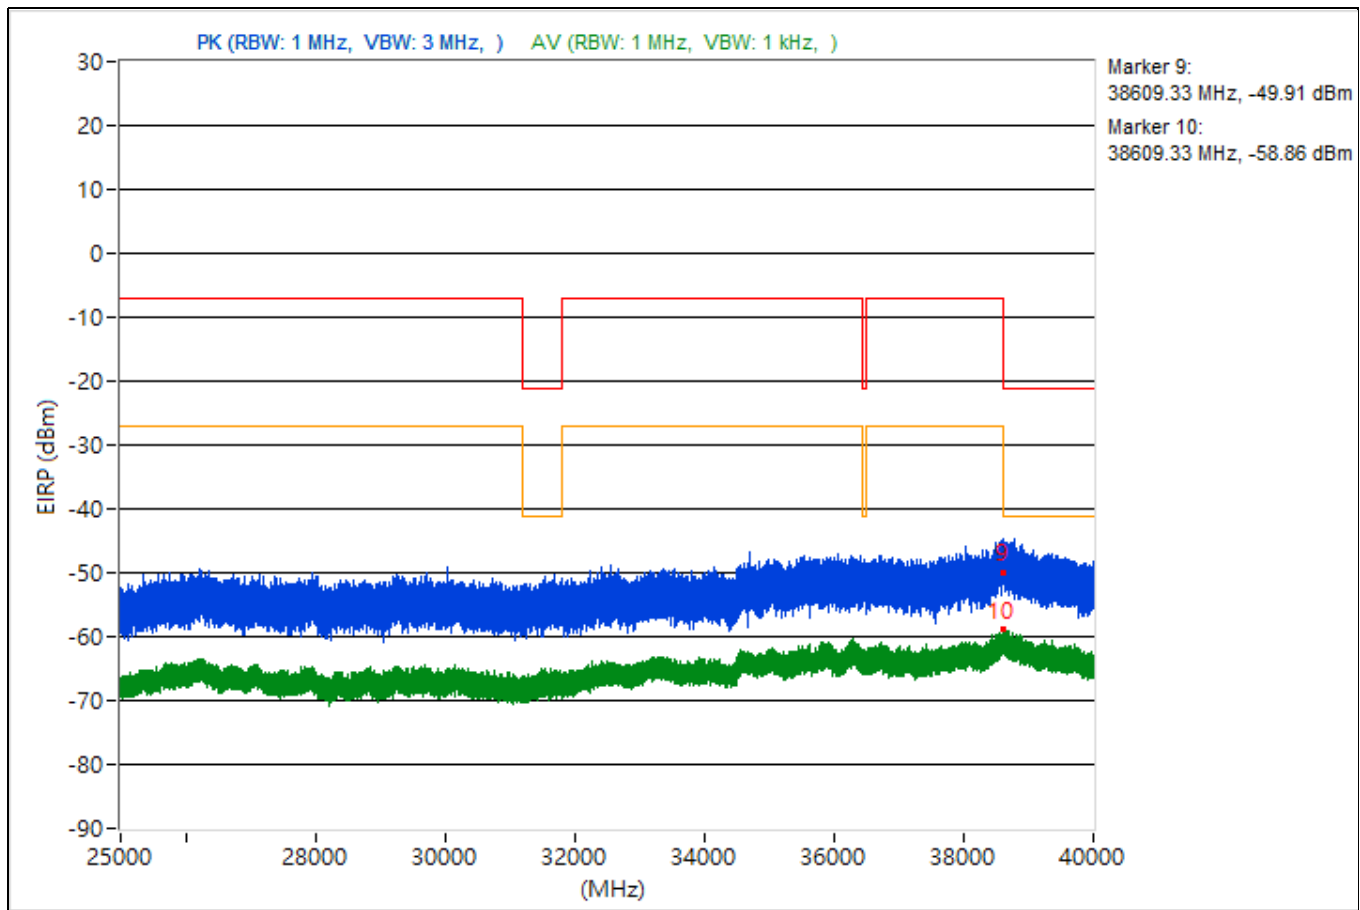


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3800.23	51.06 PK	74	-22.94	-54.02	-50.82	4.92	-44.2
2	3800.23	38.09 AV	54	-15.91	-64.47	-65.85	4.92	-57.17
3	14488.36	49.77 PK	74	-24.23	-54.11	-52.82	4.92	-45.49
4	14488.36	36.68 AV	54	-17.32	-67.9	-65.45	4.92	-58.58
5	19247.6	48.55 PK	74	-25.45	-56.16	-53.51	4.92	-46.71
6	19247.6	37.54 AV	54	-16.46	-68.54	-63.93	4.92	-57.72
7	23702.3	51.49 PK	74	-22.51	-52.35	-51.13	4.92	-43.77
8	23702.3	38.6 AV	54	-15.4	-63.08	-66.93	4.92	-56.66
9	38604.71	47.52 PK	74	-26.48	-54.41	-57.46	4.92	-47.74
10	38604.71	35.51 AV	54	-18.49	-69.62	-66.34	4.92	-59.75

Note: Margin value = Emission Level - Limit value

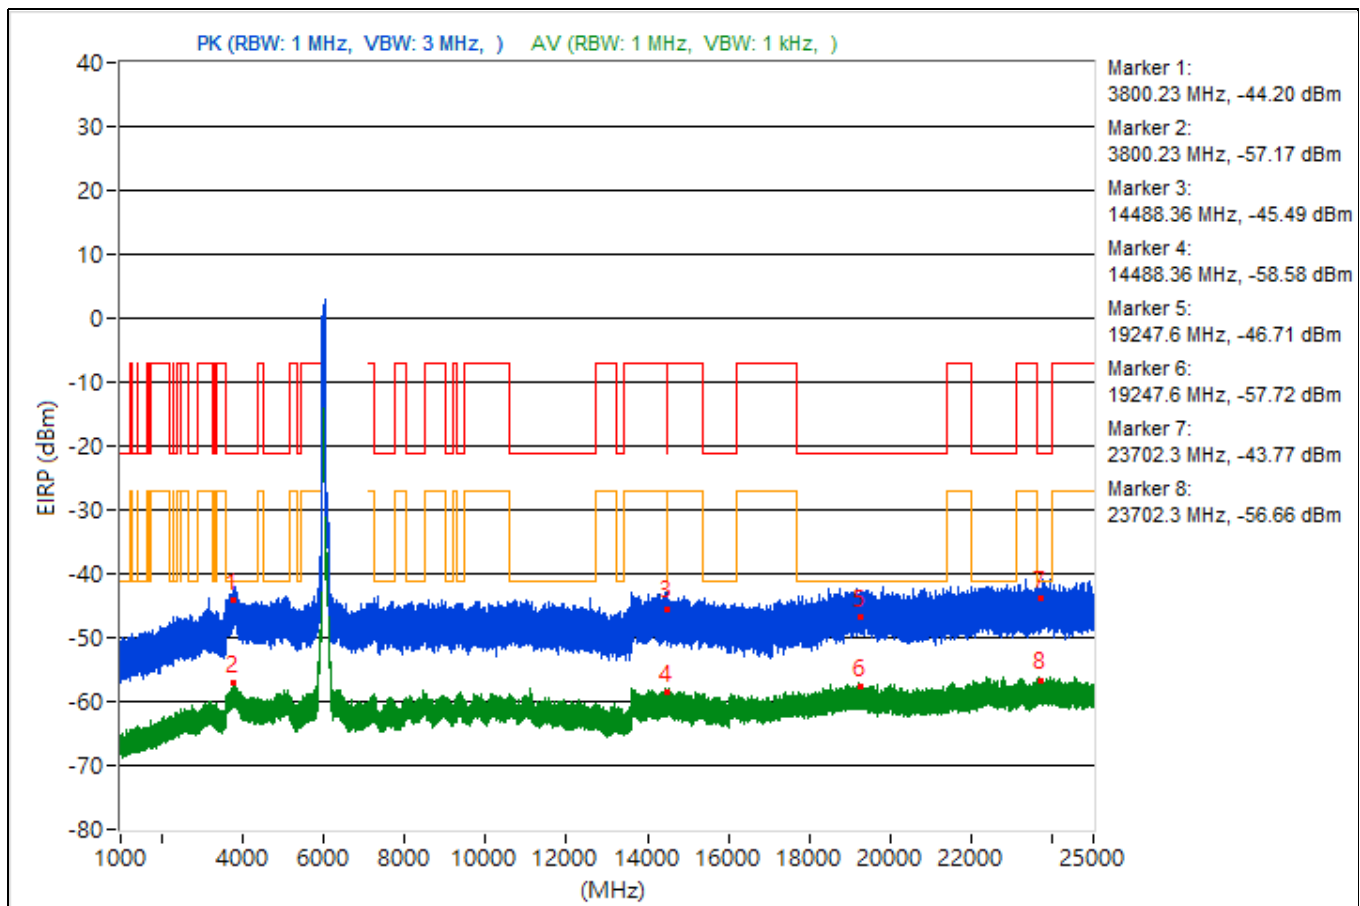


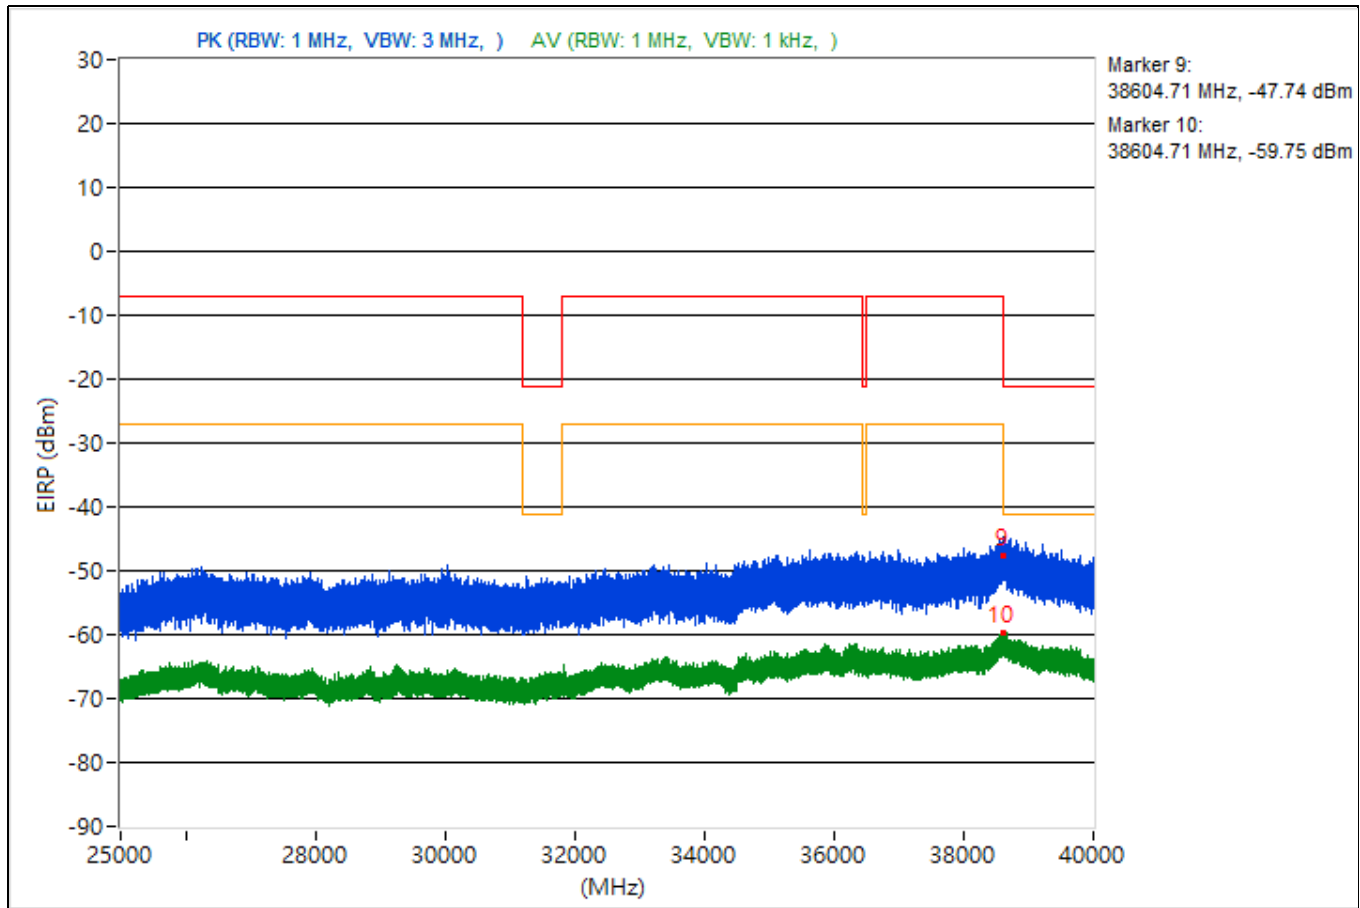


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3764.38	50.31 PK	74	-23.69	-55.04	-51.45	4.92	-44.95
2	3764.38	37.7 AV	54	-16.3	-64.34	-67.08	4.92	-57.56
3	14498.4	48.1 PK	74	-25.9	-53.6	-57.37	4.92	-47.16
4	14498.4	37.56 AV	54	-16.44	-65.33	-65.96	4.92	-57.7
5	18674.8	49.33 PK	74	-24.67	-52.73	-55.39	4.92	-45.93
6	18674.8	37.9 AV	54	-16.1	-63.49	-68.41	4.92	-57.36
7	23791.2	50.72 PK	74	-23.28	-55.15	-50.83	4.92	-44.54
8	23791.2	38.57 AV	54	-15.43	-67.24	-62.99	4.92	-56.69
9	38601.96	47.29 PK	74	-26.71	-58.59	-54.26	4.92	-47.97
10	38601.96	35.86 AV	54	-18.14	-66.48	-68.4	4.92	-59.4

Note: Margin value = Emission Level - Limit value

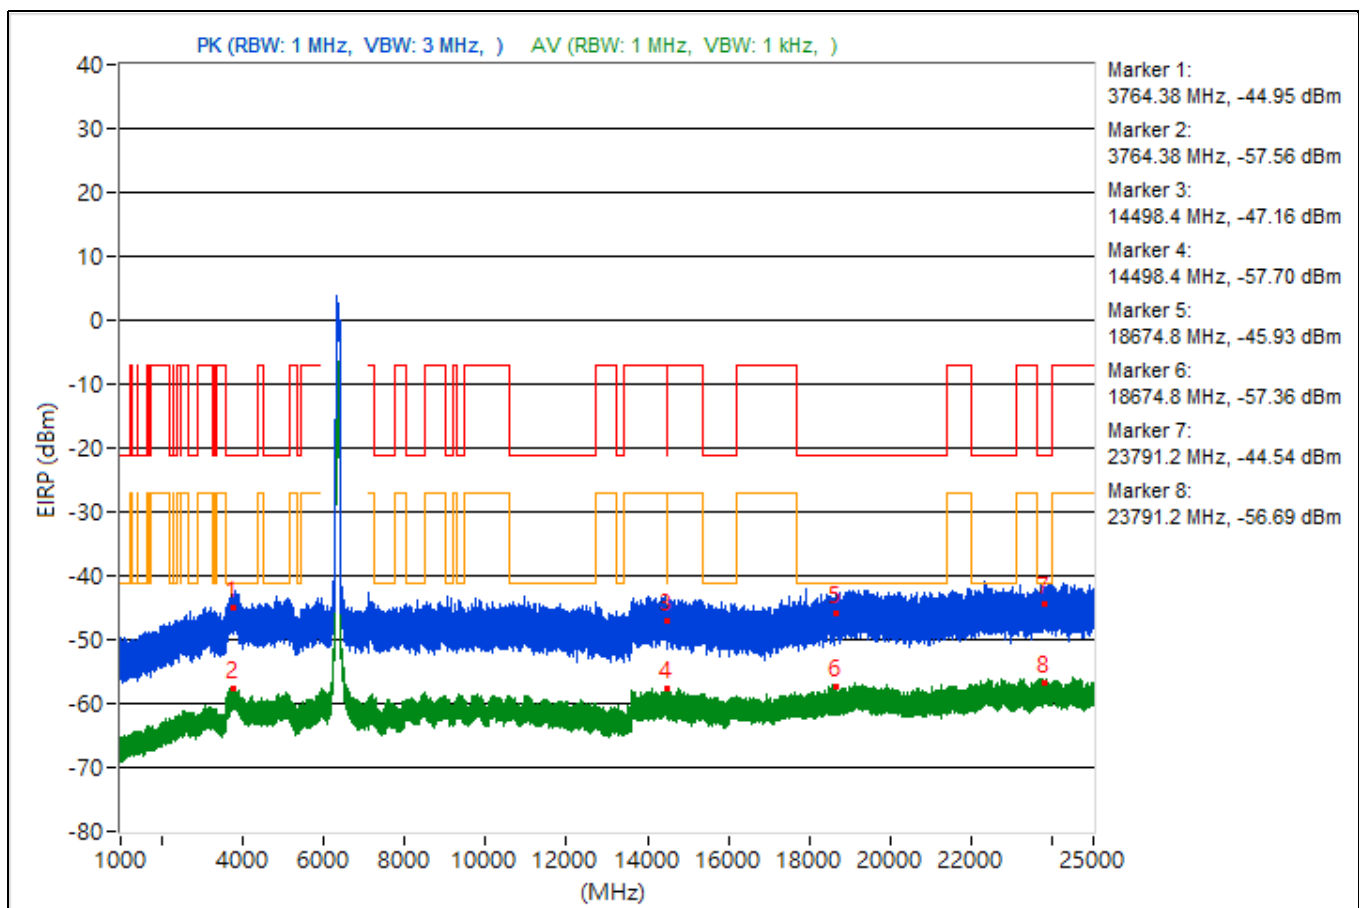


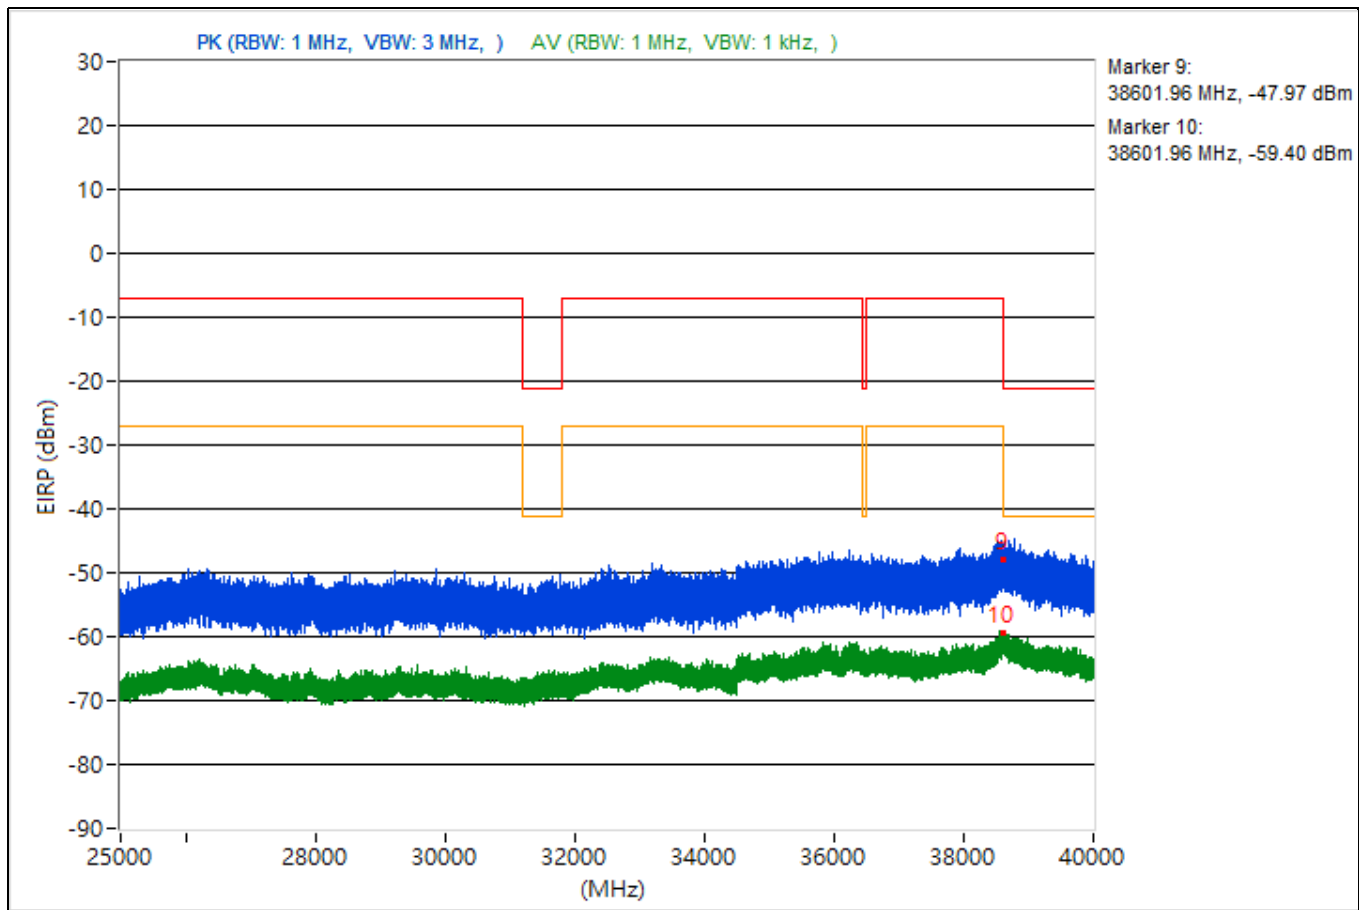


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.04	50.34 PK	74	-23.66	-54.79	-51.52	4.92	-44.92
2	3811.04	37.73 AV	54	-16.27	-67.69	-64	4.92	-57.53
3	14491.47	47.39 PK	74	-26.61	-57.53	-54.57	4.92	-47.87
4	14491.47	36.75 AV	54	-17.25	-65.42	-67.76	4.92	-58.51
5	19349.4	48.91 PK	74	-25.09	-54.79	-53.83	4.92	-46.35
6	19349.4	38.09 AV	54	-15.91	-67.78	-63.46	4.92	-57.17
7	23839.7	47.79 PK	74	-26.21	-54.62	-56.35	4.92	-47.47
8	23839.7	39.06 AV	54	-14.94	-65.2	-63.28	4.92	-56.2
9	38623.02	47.88 PK	74	-26.12	-58.86	-53.38	4.92	-47.38
10	38623.02	35.48 AV	54	-18.52	-69.76	-66.33	4.92	-59.78

Note: Margin value = Emission Level - Limit value

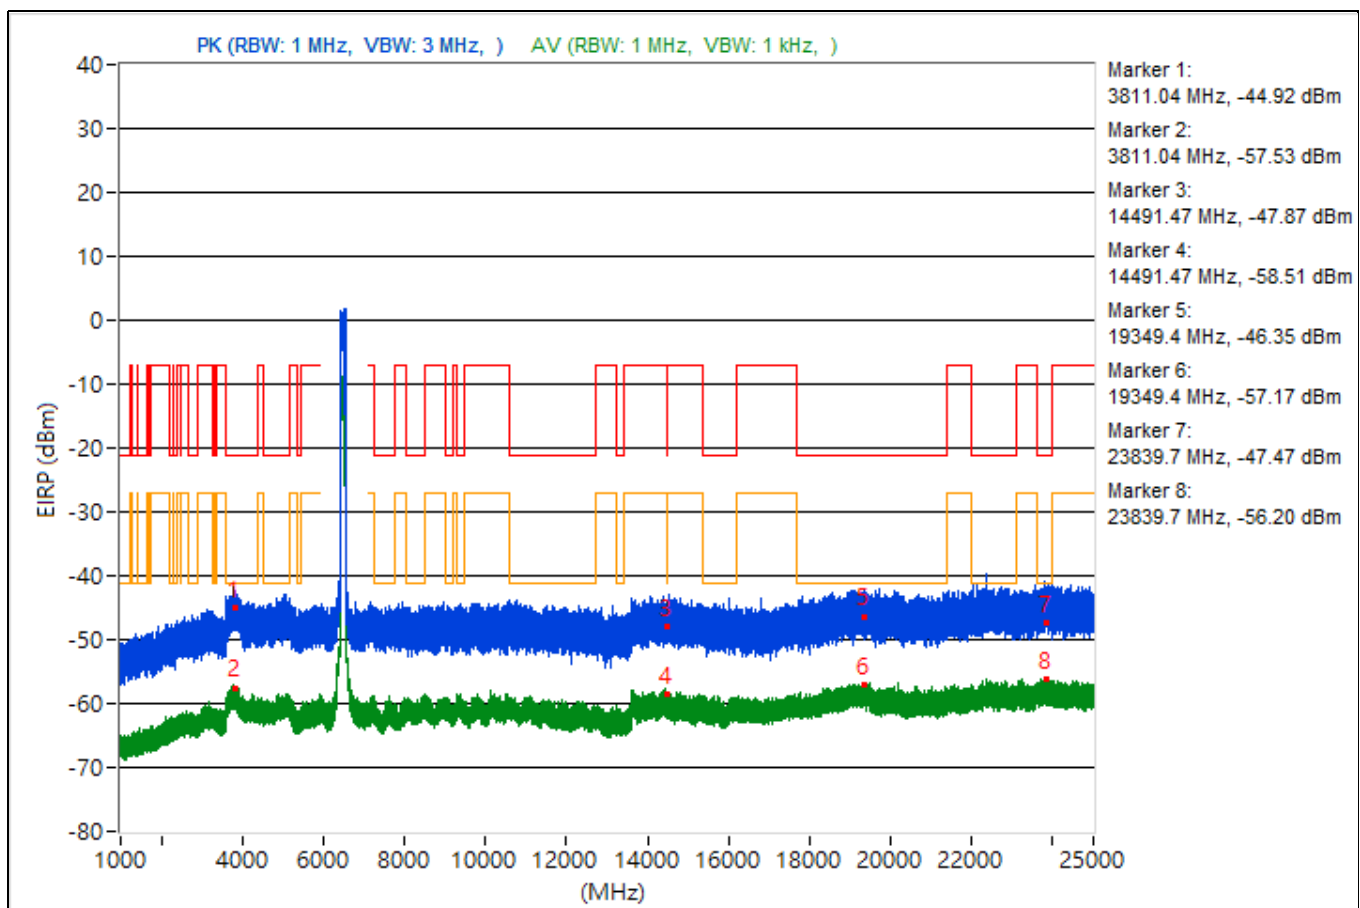


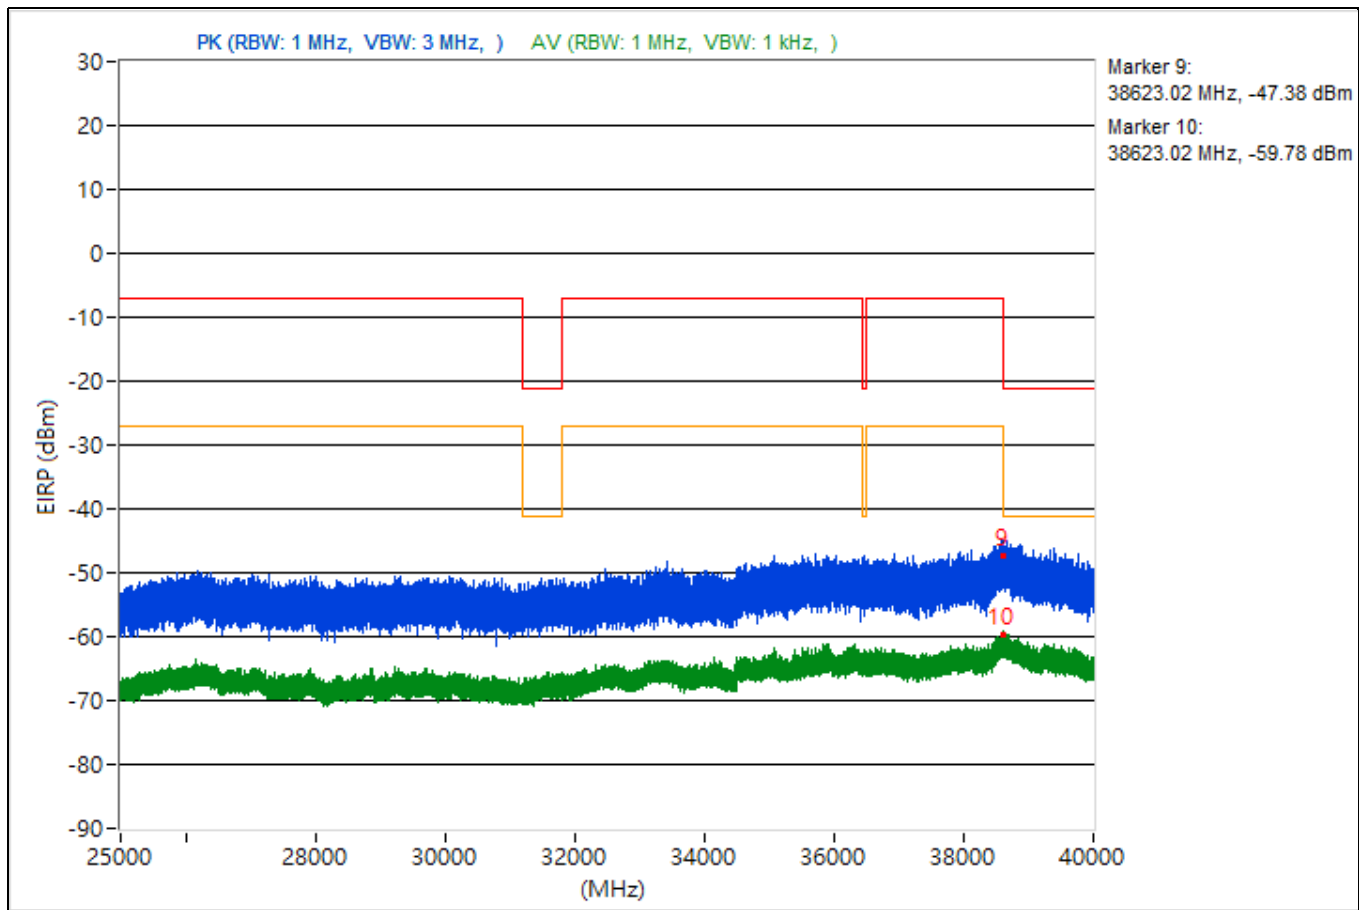


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4874.42	48.83 PK	74	-25.17	-55.27	-53.6	4.92	-46.43
2	4874.42	38.17 AV	54	-15.83	-66.46	-63.94	4.92	-57.09
3	14476.98	49.48 PK	74	-24.52	-55.09	-52.67	4.92	-45.78
4	14476.98	37.65 AV	54	-16.35	-64.36	-67.17	4.92	-57.61
5	19165	48.73 PK	74	-25.27	-53.23	-56.2	4.92	-46.53
6	19165	38.03 AV	54	-15.97	-67.41	-63.69	4.92	-57.23
7	22319.8	51.14 PK	74	-22.86	-54.37	-50.55	4.92	-44.12
8	22319.8	38.7 AV	54	-15.3	-66.42	-63.16	4.92	-56.56
9	38622.31	49.44 PK	74	-24.56	-54.2	-53.35	4.92	-45.82
10	38622.31	35.61 AV	54	-18.39	-66.42	-69.16	4.92	-59.65

Note: Margin value = Emission Level - Limit value

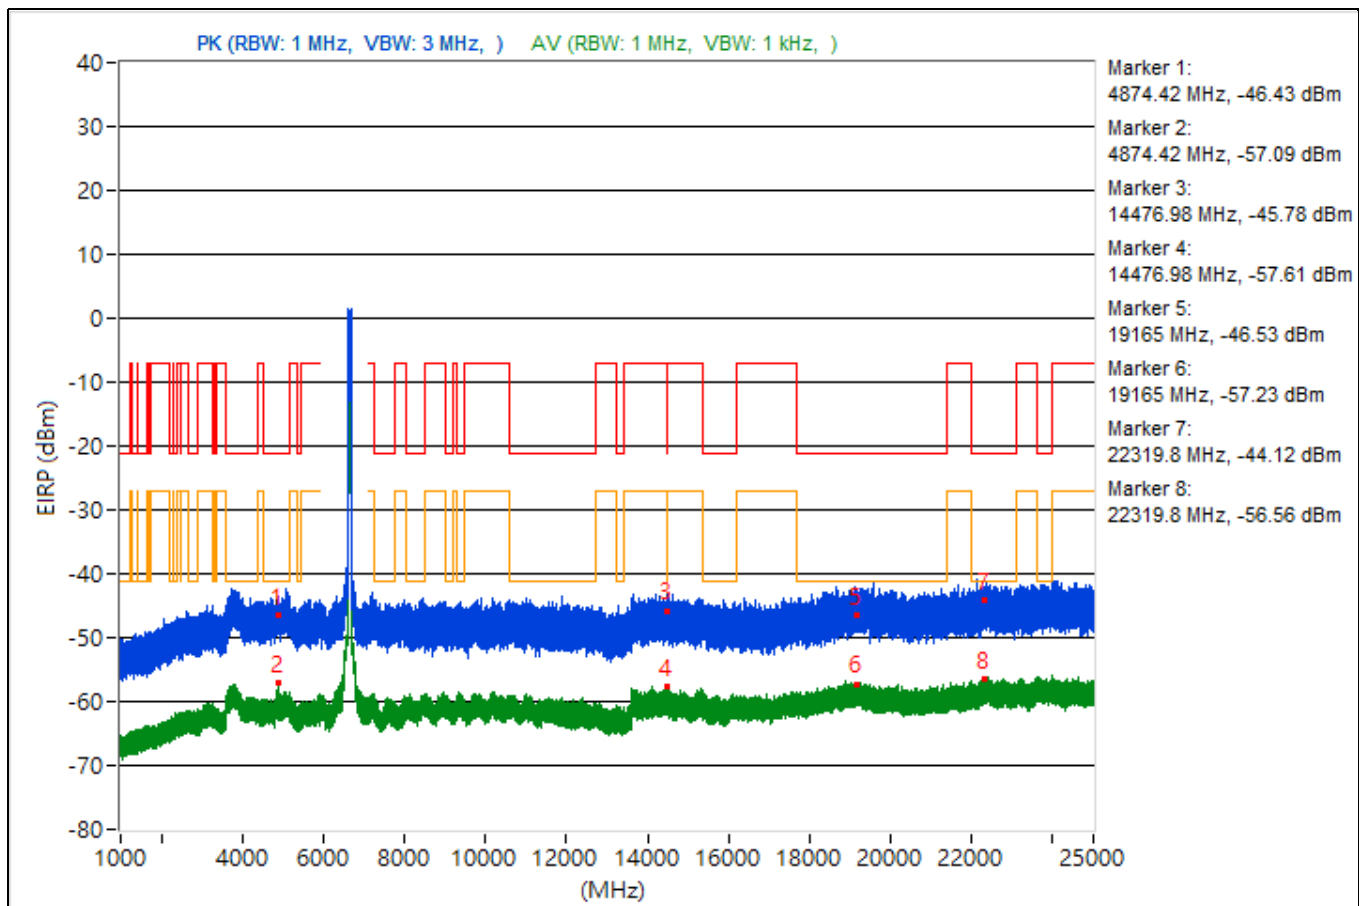


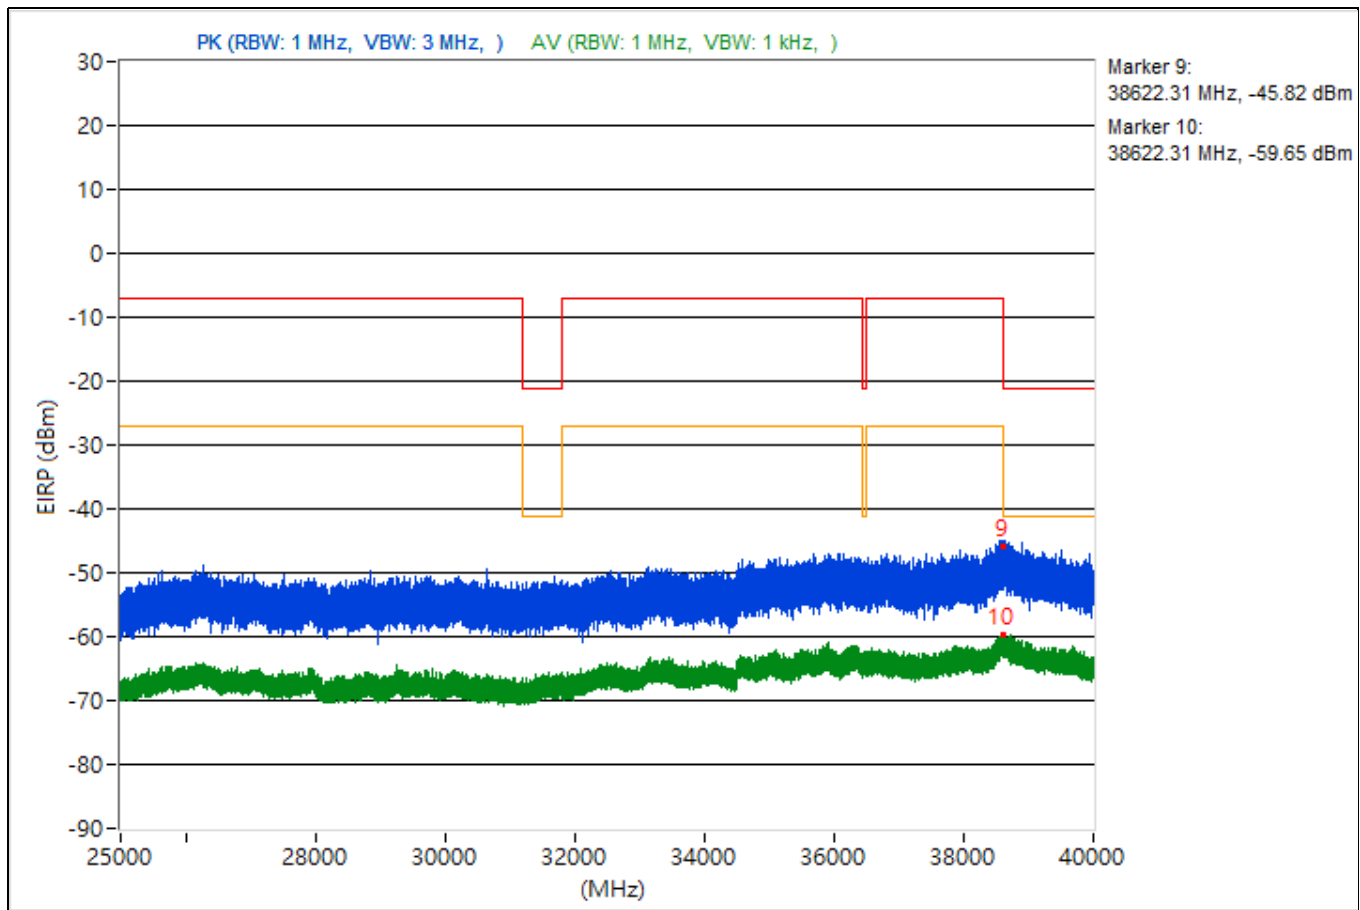


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.23	50.9 PK	74	-23.1	-55.51	-50.46	4.92	-44.36
2	3807.23	37.67 AV	54	-16.33	-63.98	-67.95	4.92	-57.59
3	14483.02	48.02 PK	74	-25.98	-56.35	-54.24	4.92	-47.24
4	14483.02	37.22 AV	54	-16.78	-65.39	-66.63	4.92	-58.04
5	19232.3	46.63 PK	74	-27.37	-56.79	-56.33	4.92	-48.63
6	19232.3	38.5 AV	54	-15.5	-63.2	-66.99	4.92	-56.76
7	23828.5	50.11 PK	74	-23.89	-52.53	-53.7	4.92	-45.15
8	23828.5	39.1 AV	54	-14.9	-66.04	-62.75	4.92	-56.16
9	38701.96	46.48 PK	74	-27.52	-59.15	-55.16	4.92	-48.78
10	38701.96	35.35 AV	54	-18.65	-66.4	-70.02	4.92	-59.91

Note: Margin value = Emission Level - Limit value

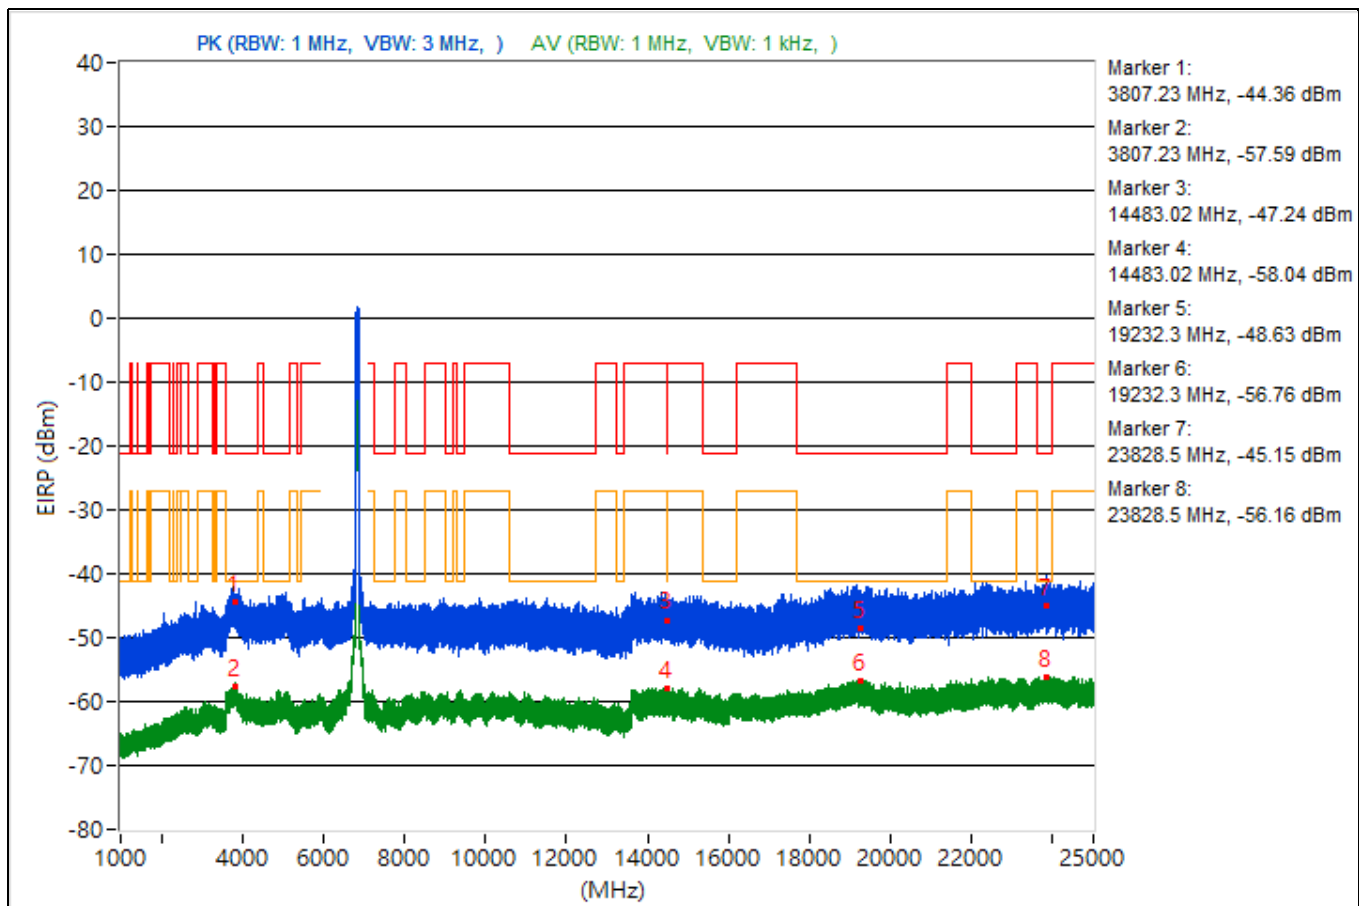


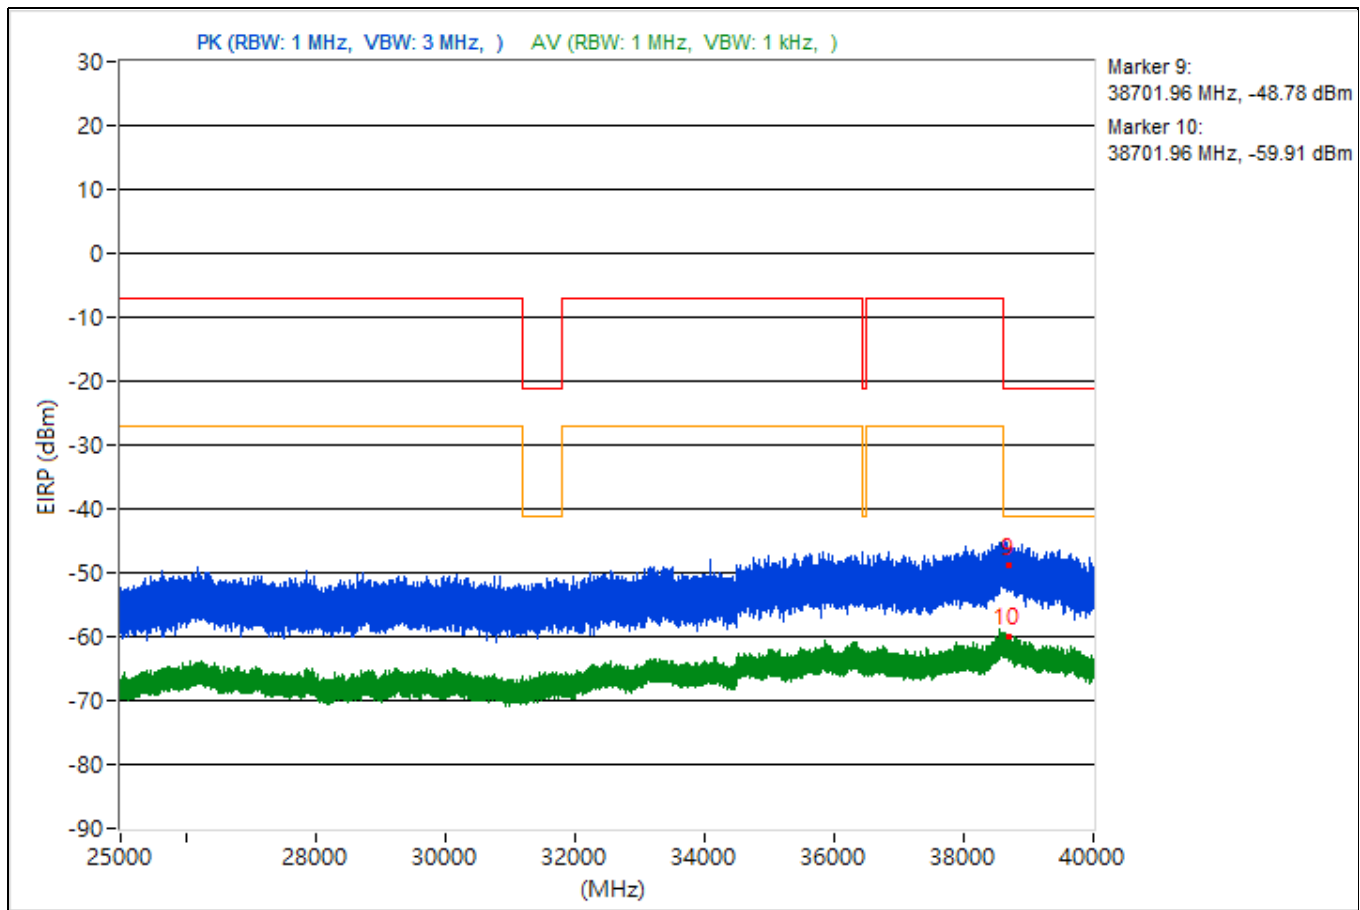


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.36	49.96 PK	74	-24.04	-53.25	-53.22	4.92	-45.3
2	3825.36	38.33 AV	54	-15.67	-65.4	-64.37	4.92	-56.93
3	14488.53	48.1 PK	74	-25.9	-54.41	-55.89	4.92	-47.16
4	14488.53	37.2 AV	54	-16.8	-64.86	-67.53	4.92	-58.06
5	19443.8	49.32 PK	74	-24.68	-54.52	-53.3	4.92	-45.94
6	19443.8	38.41 AV	54	-15.59	-66.6	-63.5	4.92	-56.85
7	23924.1	48.73 PK	74	-25.27	-55.69	-53.5	4.92	-46.53
8	23924.1	39.26 AV	54	-14.74	-62.44	-66.23	4.92	-56
9	38667.29	47.63 PK	74	-26.37	-56.17	-55.02	4.92	-47.63
10	38667.29	35.56 AV	54	-18.44	-69.86	-66.17	4.92	-59.7

Note: Margin value = Emission Level - Limit value

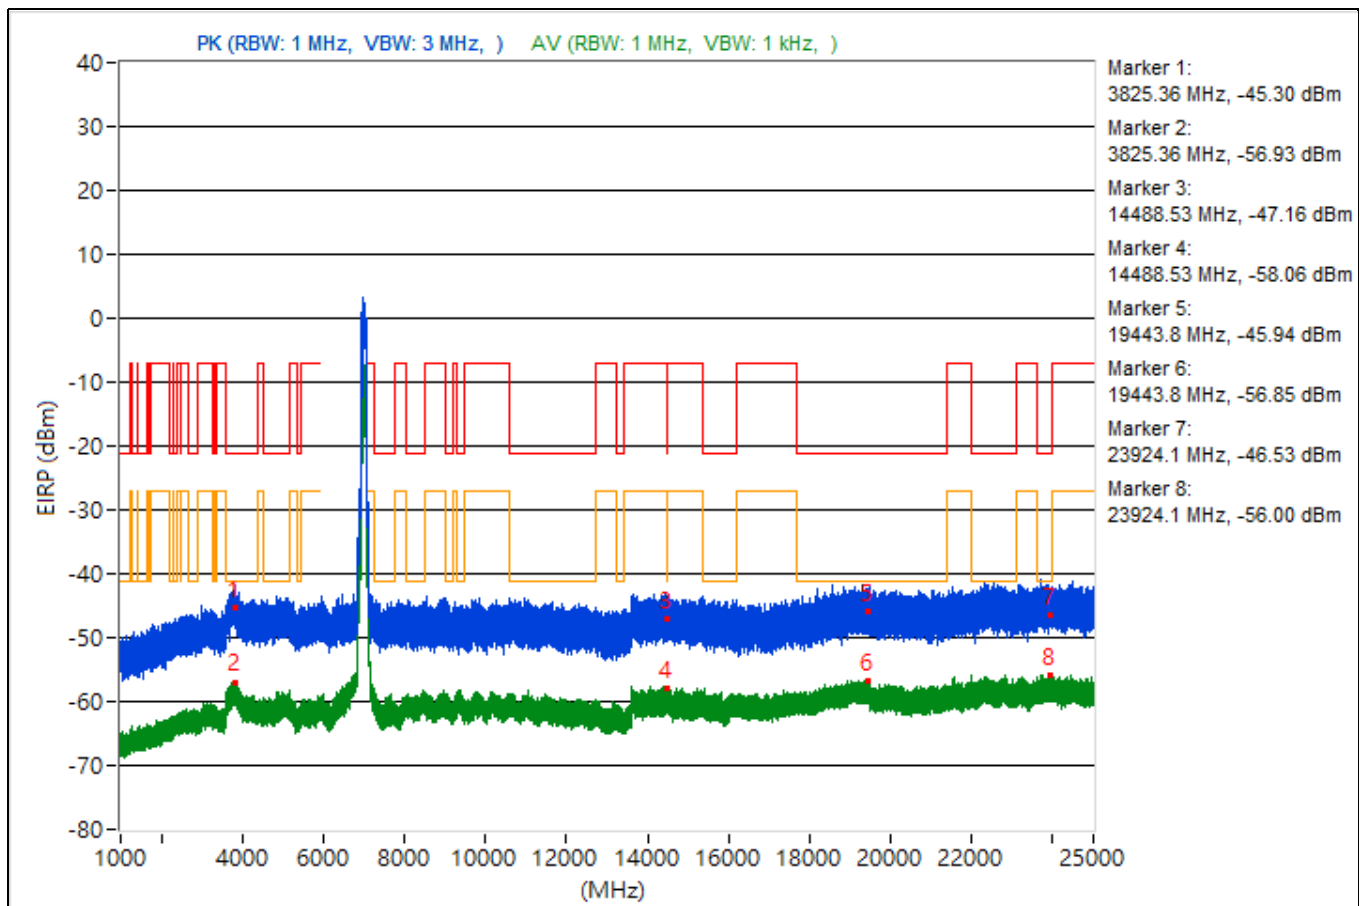


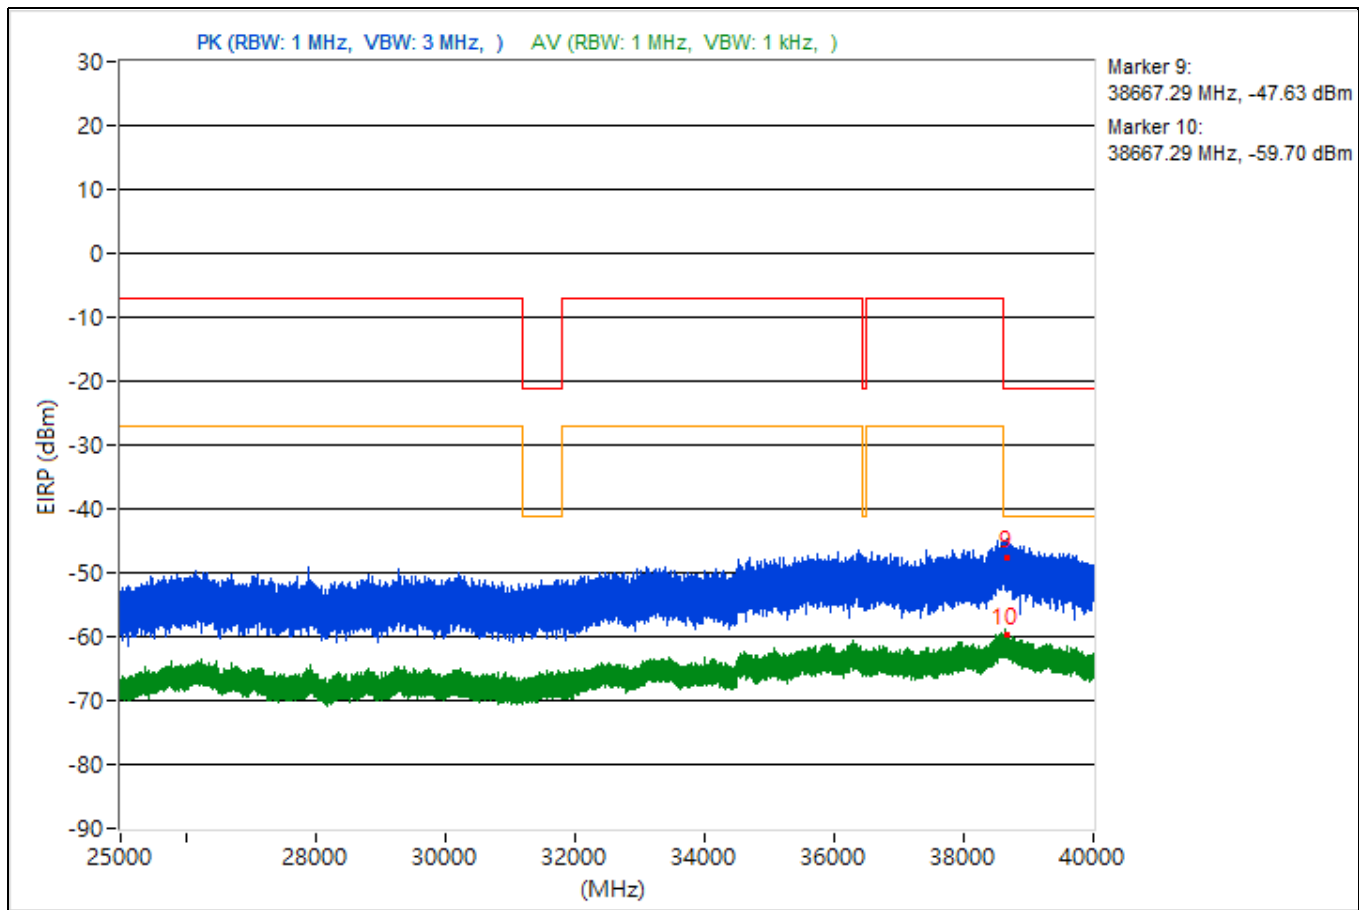


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3856.93	48.96 PK	74	-25.04	-53.09	-55.78	4.92	-46.3
2	3856.93	37.2 AV	54	-16.8	-64.71	-67.81	4.92	-58.06
3	14483.47	48.99 PK	74	-25.01	-54.68	-53.76	4.92	-46.27
4	14483.47	37.12 AV	54	-16.88	-67.15	-65.2	4.92	-58.14
5	19215.8	47.87 PK	74	-26.13	-56.79	-54.23	4.92	-47.39
6	19215.8	37.9 AV	54	-16.1	-66.24	-64.52	4.92	-57.36
7	22793.9	48.36 PK	74	-25.64	-53.52	-56.72	4.92	-46.9
8	22793.9	38.87 AV	54	-15.13	-65.93	-63.14	4.92	-56.39
9	38638.13	46.78 PK	74	-27.22	-56.24	-56.59	4.92	-48.48
10	38638.13	34.84 AV	54	-19.16	-70.28	-67.02	4.92	-60.42

Note: Margin value = Emission Level - Limit value

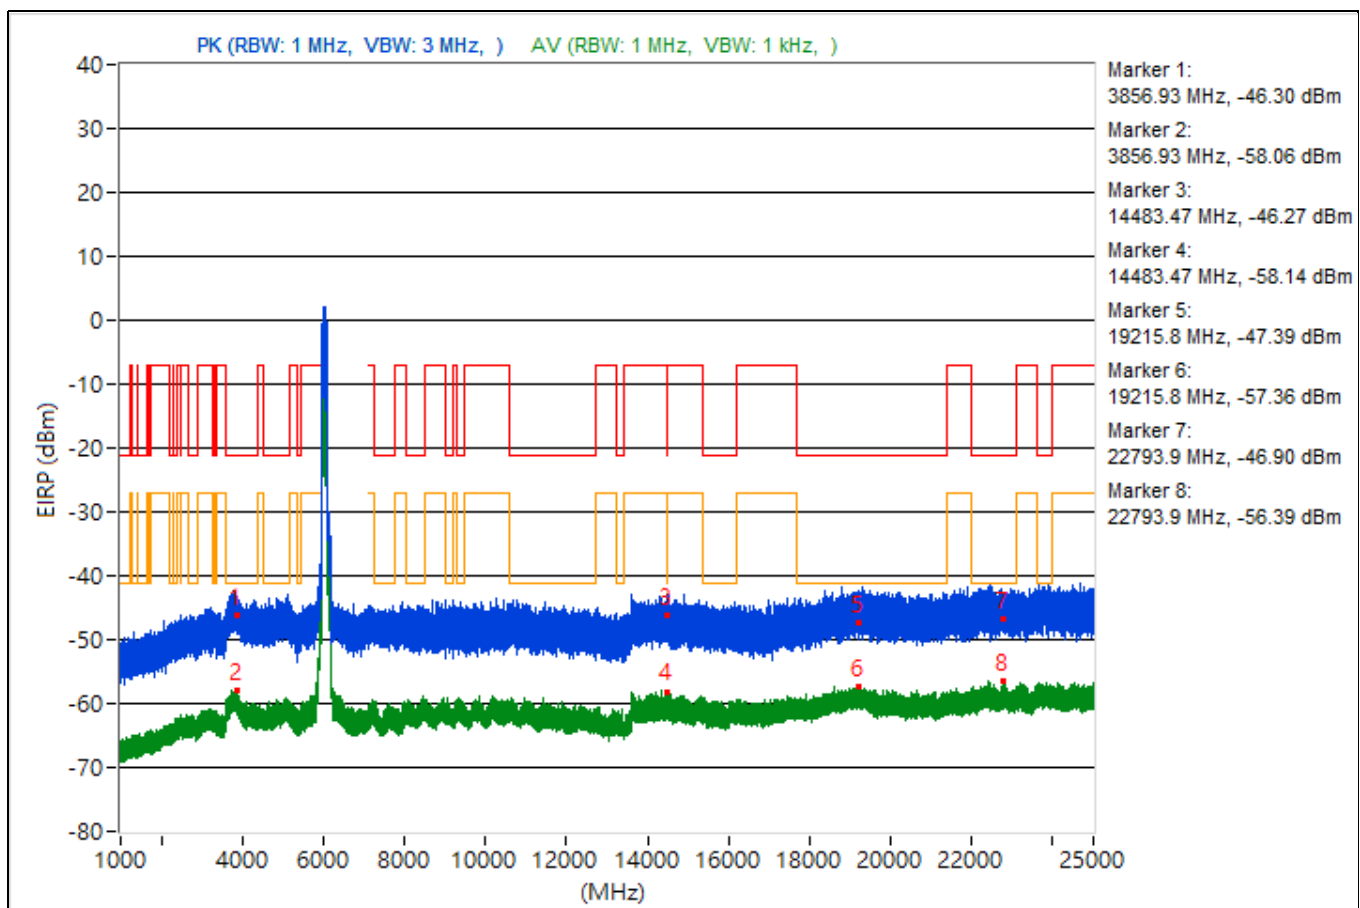


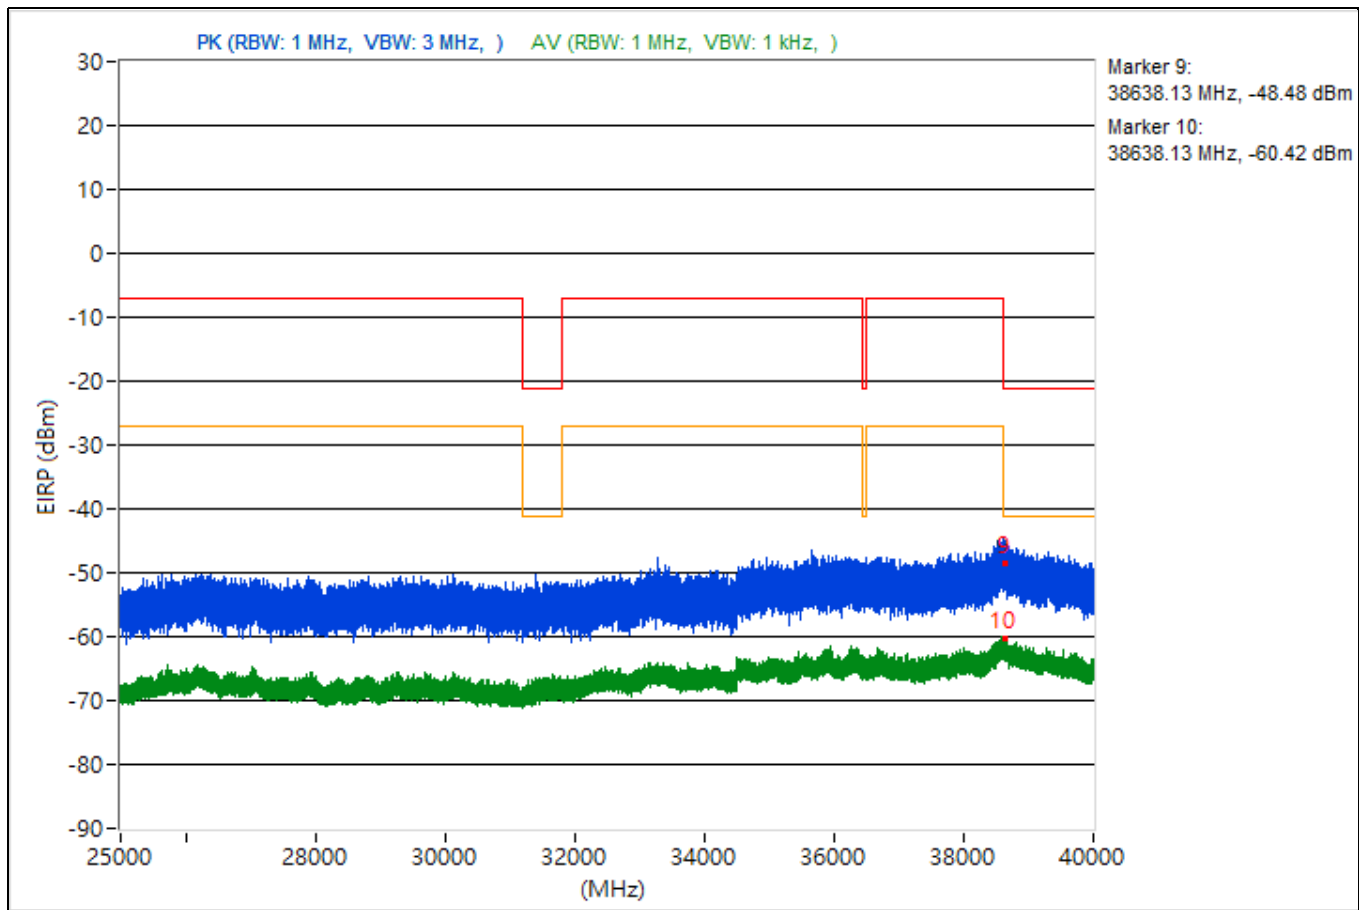


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3704.49	48.98 PK	74	-25.02	-54.4	-54.03	4.92	-46.28
2	3704.49	37.32 AV	54	-16.68	-64.71	-67.46	4.92	-57.94
3	14471.56	49.15 PK	74	-24.85	-55.5	-52.94	4.92	-46.11
4	14471.56	37.1 AV	54	-16.9	-65.5	-66.77	4.92	-58.16
5	18944.3	48.67 PK	74	-25.33	-54.98	-54.11	4.92	-46.59
6	18944.3	38.12 AV	54	-15.88	-66.08	-64.24	4.92	-57.14
7	23834.5	50.02 PK	74	-23.98	-52.58	-53.85	4.92	-45.24
8	23834.5	38.89 AV	54	-15.11	-63.28	-65.64	4.92	-56.37
9	38653.78	45.07 PK	74	-28.93	-57.21	-59.26	4.92	-50.19
10	38653.78	34.87 AV	54	-19.13	-67.02	-70.19	4.92	-60.39

Note: Margin value = Emission Level - Limit value

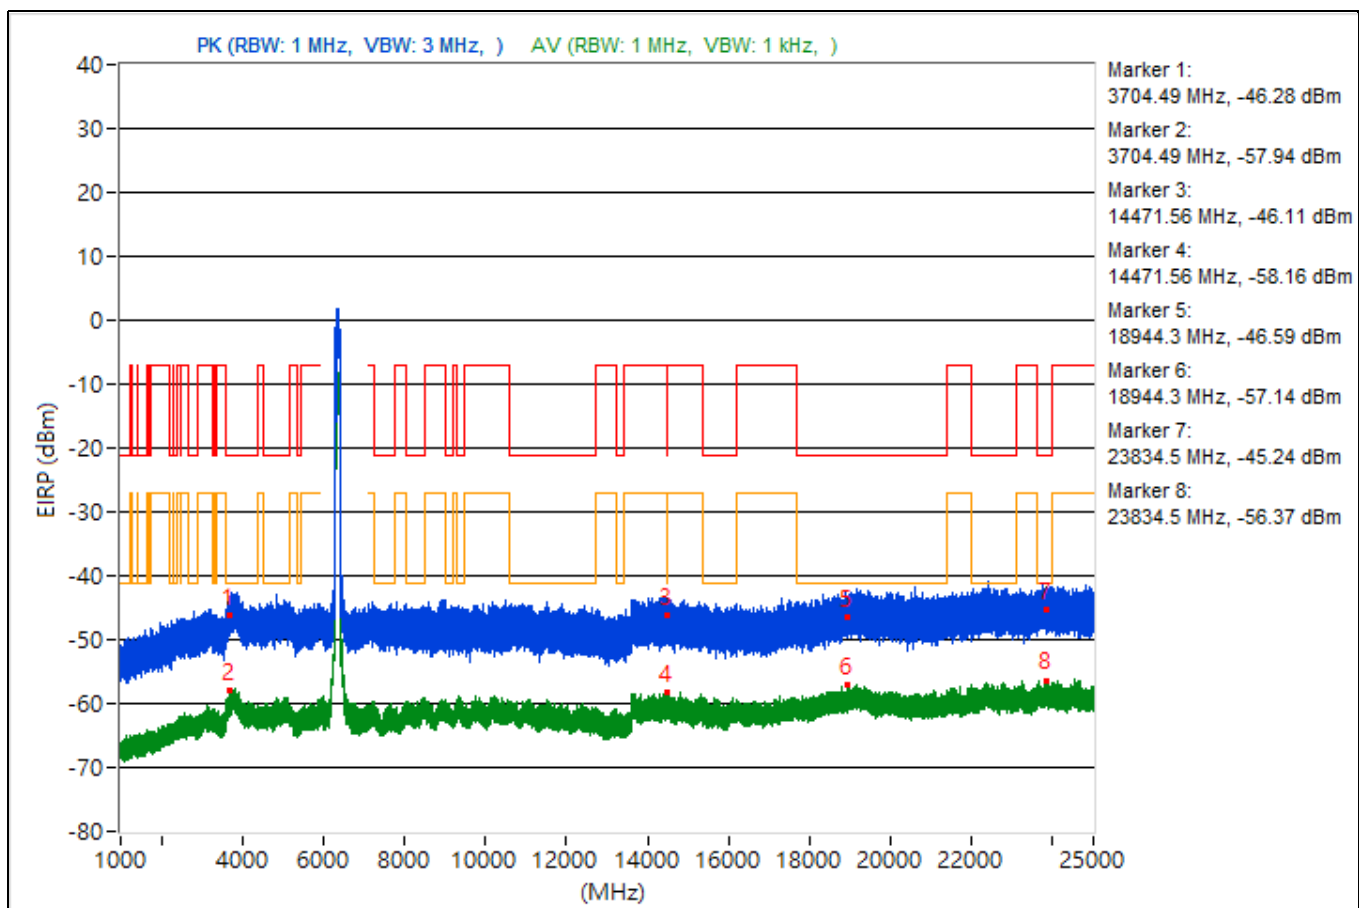


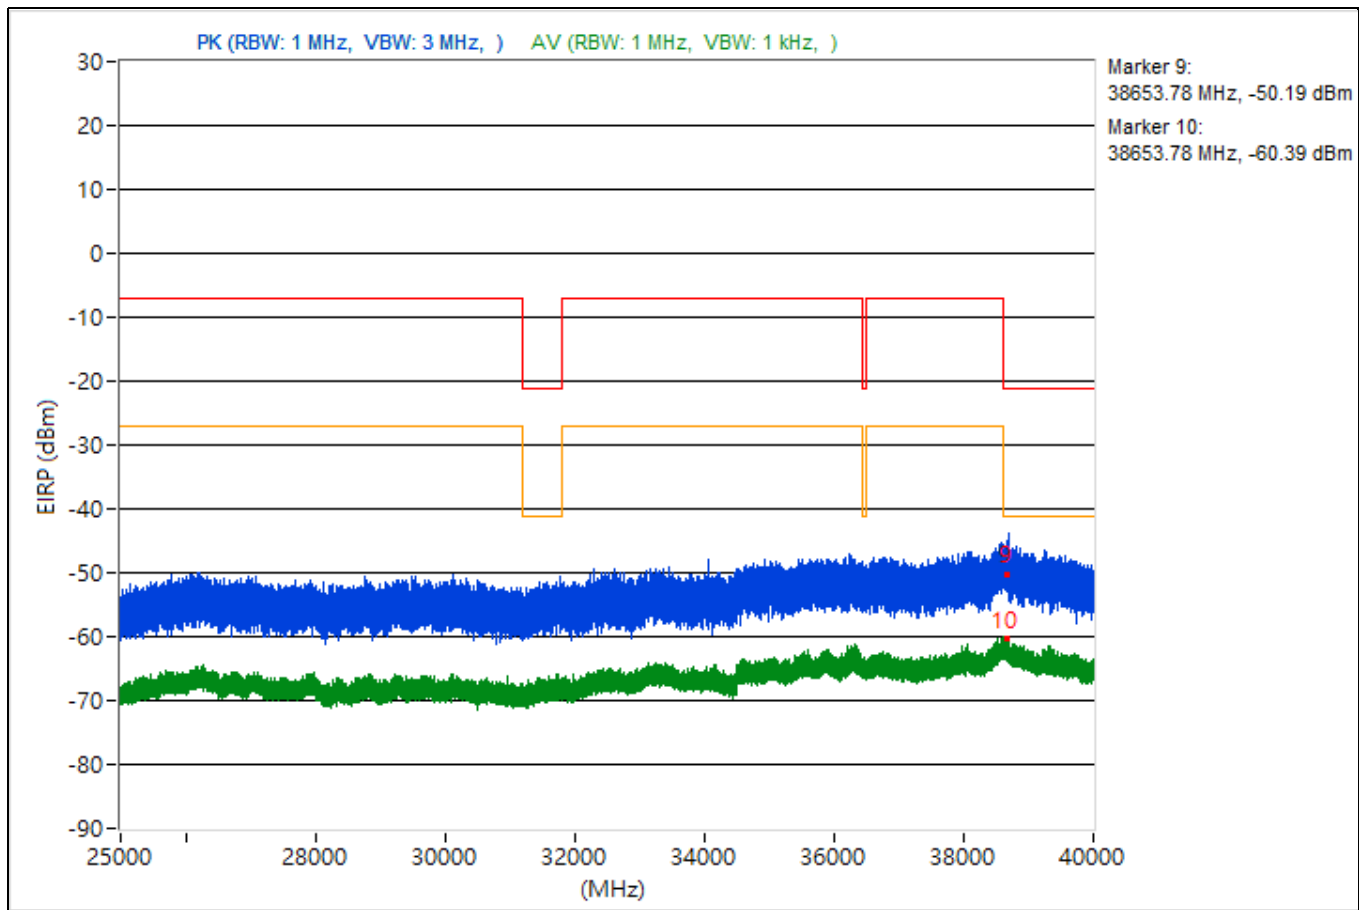


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.83	47.44 PK	74	-26.56	-56.66	-55	4.92	-47.82
2	3742.83	37.09 AV	54	-16.91	-64.89	-67.78	4.92	-58.17
3	14479.82	47.39 PK	74	-26.61	-57.64	-54.52	4.92	-47.87
4	14479.82	36.29 AV	54	-17.71	-65.4	-69.21	4.92	-58.97
5	19181	48.69 PK	74	-25.31	-54.61	-54.4	4.92	-46.57
6	19181	37.67 AV	54	-16.33	-67.46	-64.18	4.92	-57.59
7	22797.7	51.77 PK	74	-22.23	-54.24	-49.73	4.92	-43.49
8	22797.7	38.68 AV	54	-15.32	-66.8	-63.02	4.92	-56.58
9	38809.24	43.47 PK	74	-30.53	-57.75	-63.4	4.92	-51.79
10	38809.24	34.58 AV	54	-19.42	-70.43	-67.33	4.92	-60.68

Note: Margin value = Emission Level - Limit value

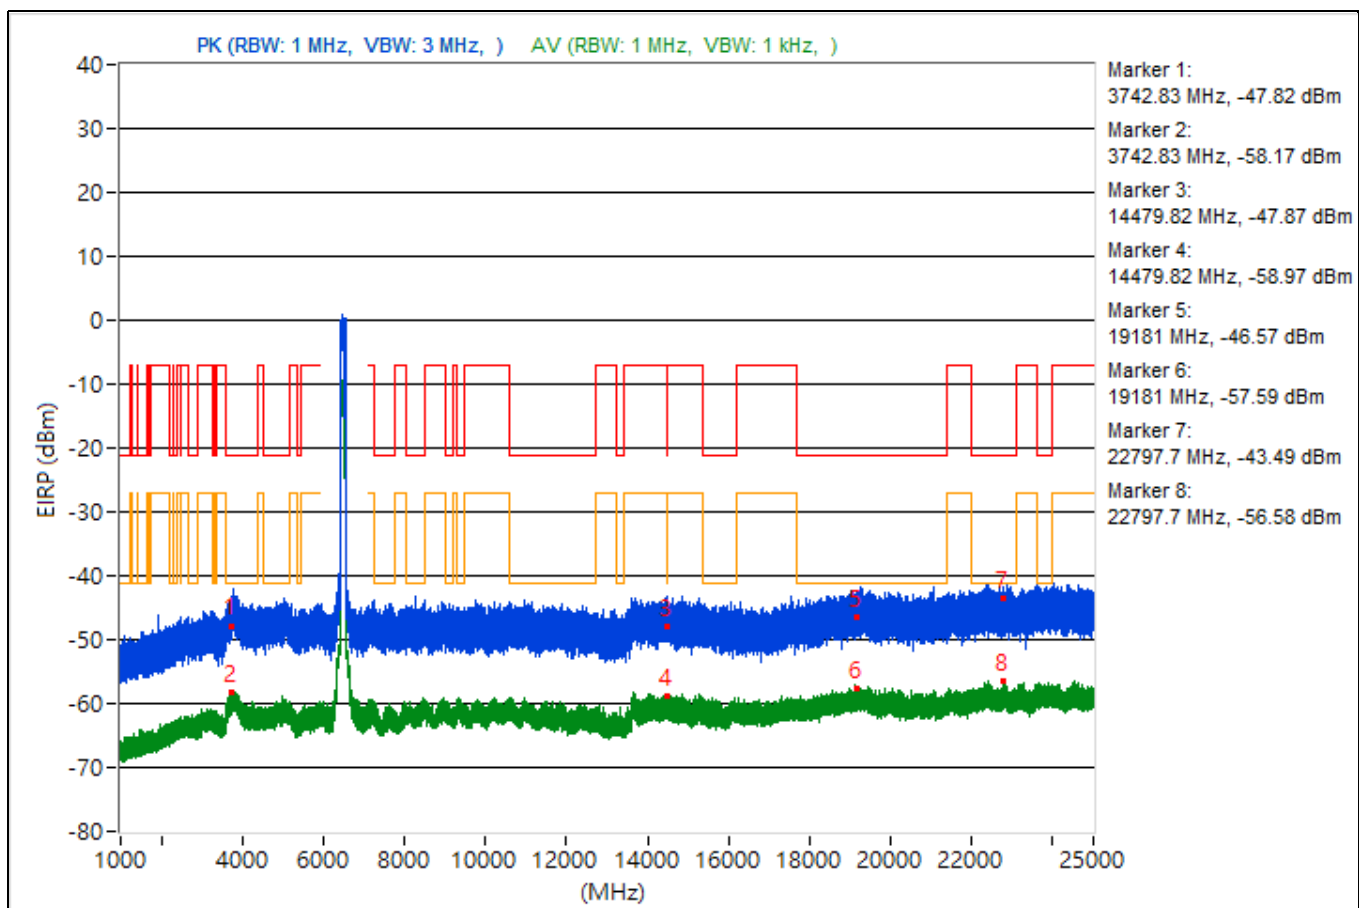


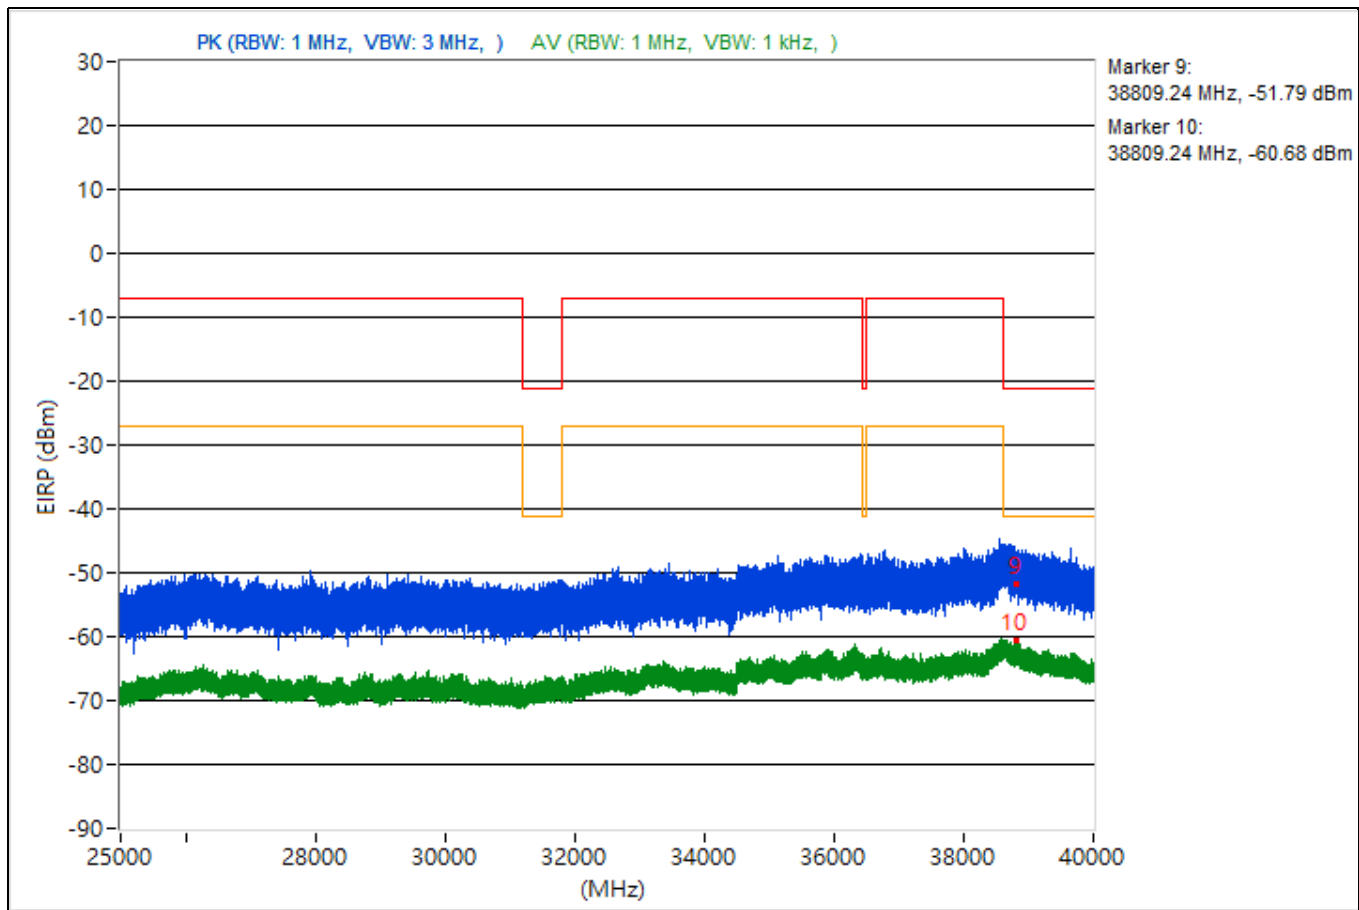


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.99	48.9 PK	74	-25.1	-53.17	-55.82	4.92	-46.36
2	3798.99	37.33 AV	54	-16.67	-67.37	-64.75	4.92	-57.93
3	14486.22	48.12 PK	74	-25.88	-54.53	-55.7	4.92	-47.14
4	14486.22	37.14 AV	54	-16.86	-65.54	-66.63	4.92	-58.12
5	19122	49.4 PK	74	-24.6	-54.94	-52.88	4.92	-45.86
6	19122	37.54 AV	54	-16.46	-68.09	-64.1	4.92	-57.72
7	22441.5	49.87 PK	74	-24.13	-51.87	-55.53	4.92	-45.39
8	22441.5	38.21 AV	54	-15.79	-67.91	-63.25	4.92	-57.05
9	38603.73	45.47 PK	74	-28.53	-60.08	-56.2	4.92	-49.79
10	38603.73	34.93 AV	54	-19.07	-69.59	-67.25	4.92	-60.33

Note: Margin value = Emission Level - Limit value

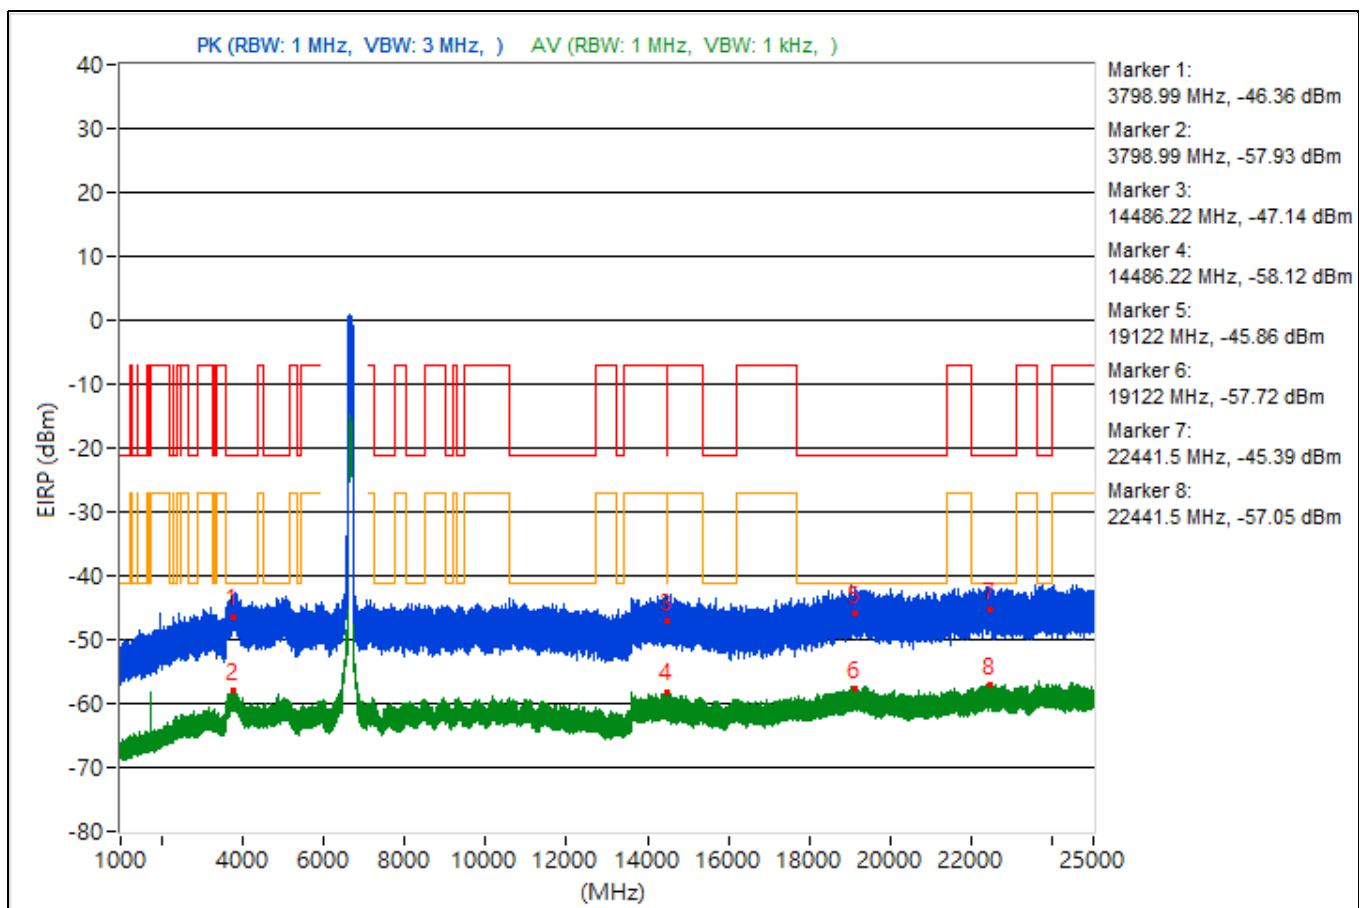


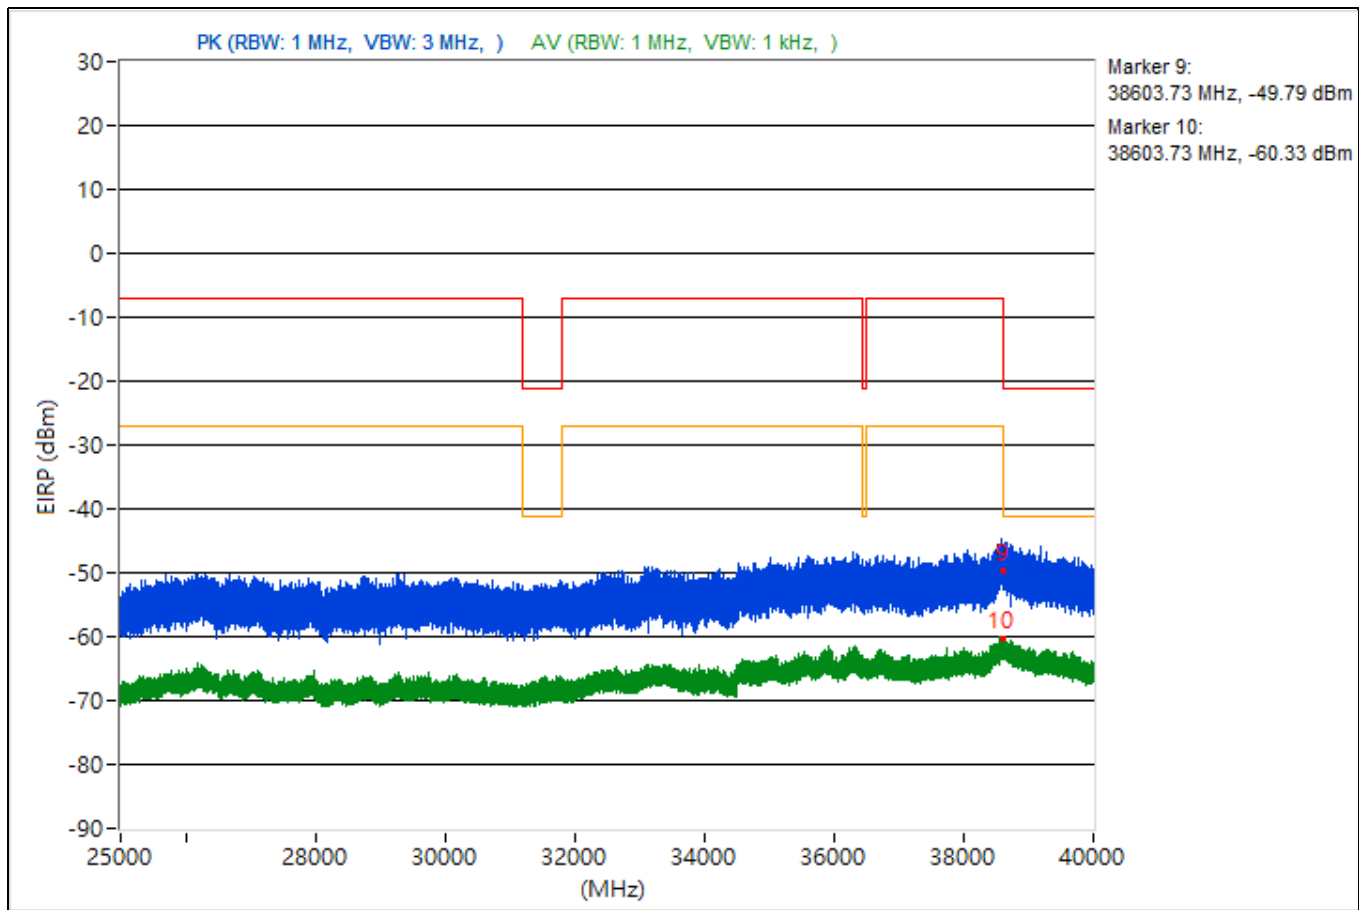


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.57	49.16 PK	74	-24.84	-55.87	-52.74	4.92	-46.1
2	3802.57	37.37 AV	54	-16.63	-67.33	-64.71	4.92	-57.89
3	15405.69	46.06 PK	74	-27.94	-56.31	-58.15	4.92	-49.2
4	15405.69	36.17 AV	54	-17.83	-65.85	-68.63	4.92	-59.09
5	19359.6	49.58 PK	74	-24.42	-54.07	-53.2	4.92	-45.68
6	19359.6	38.11 AV	54	-15.89	-66	-64.33	4.92	-57.15
7	22371.9	49.07 PK	74	-24.93	-52.67	-56.3	4.92	-46.19
8	22371.9	38.48 AV	54	-15.52	-66.84	-63.28	4.92	-56.78
9	38600.53	44.16 PK	74	-29.84	-59.38	-58.71	4.92	-51.1
10	38600.53	35.52 AV	54	-18.48	-67.79	-67.56	4.92	-59.74

Note: Margin value = Emission Level - Limit value

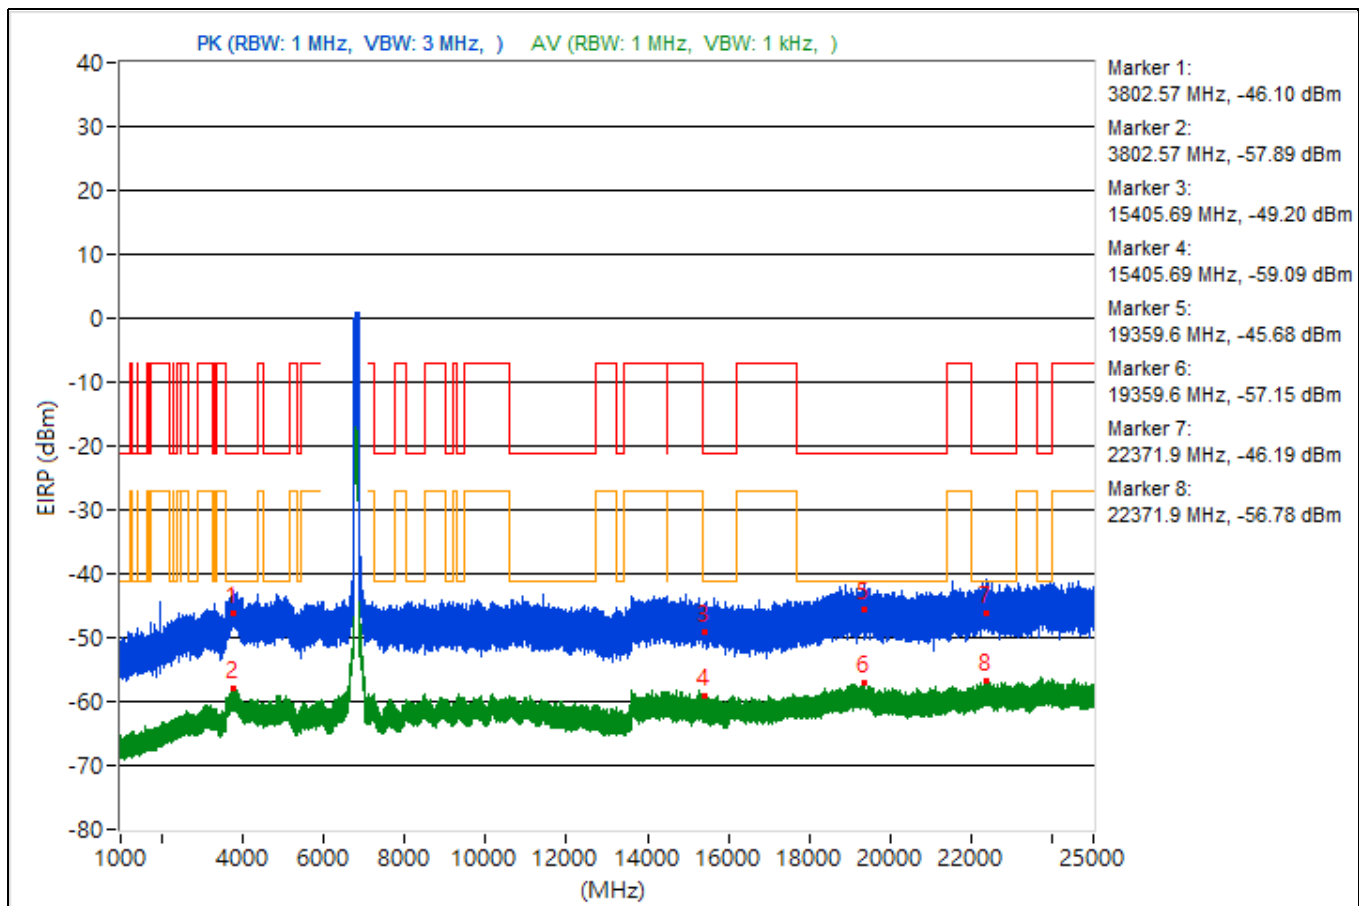


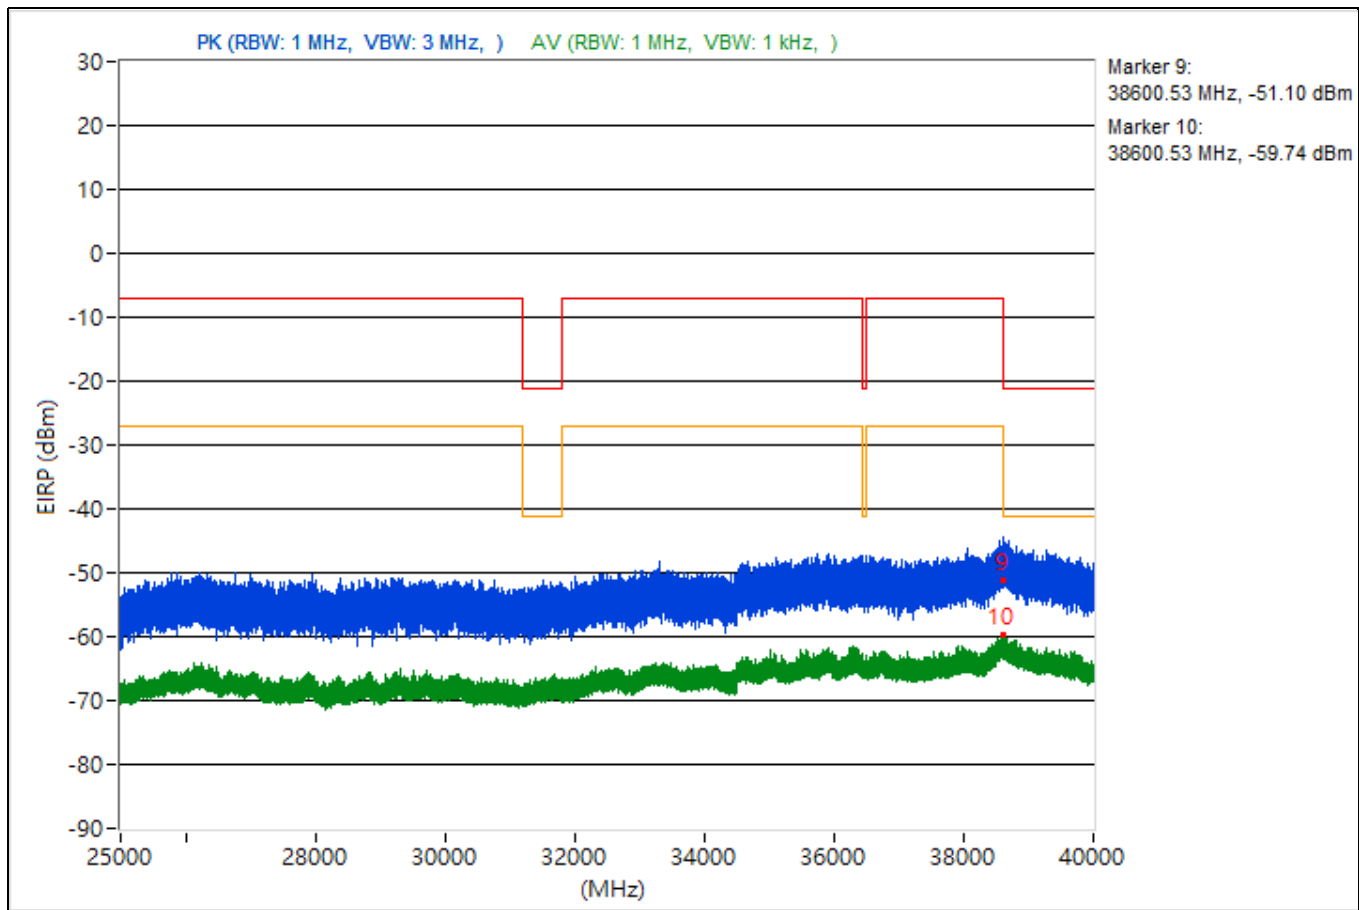


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.72	49.95 PK	74	-24.05	-54.4	-52.34	4.92	-45.31
2	3809.72	36.94 AV	54	-17.06	-65.14	-67.73	4.92	-58.32
3	7252.87	48.4 PK	74	-25.6	-54.27	-55.38	4.92	-46.86
4	7252.87	36.92 AV	54	-17.08	-65.73	-66.88	4.92	-58.34
5	19174.3	49.32 PK	74	-24.68	-53.28	-54.56	4.92	-45.94
6	19174.3	38.07 AV	54	-15.93	-67.36	-63.65	4.92	-57.19
7	23888.3	49.52 PK	74	-24.48	-53.4	-53.95	4.92	-45.74
8	23888.3	38.39 AV	54	-15.61	-66.99	-63.36	4.92	-56.87
9	38614.04	45.95 PK	74	-28.05	-57.38	-57.11	4.92	-49.31
10	38614.04	34.58 AV	54	-19.42	-71.32	-66.96	4.92	-60.68

Note: Margin value = Emission Level - Limit value

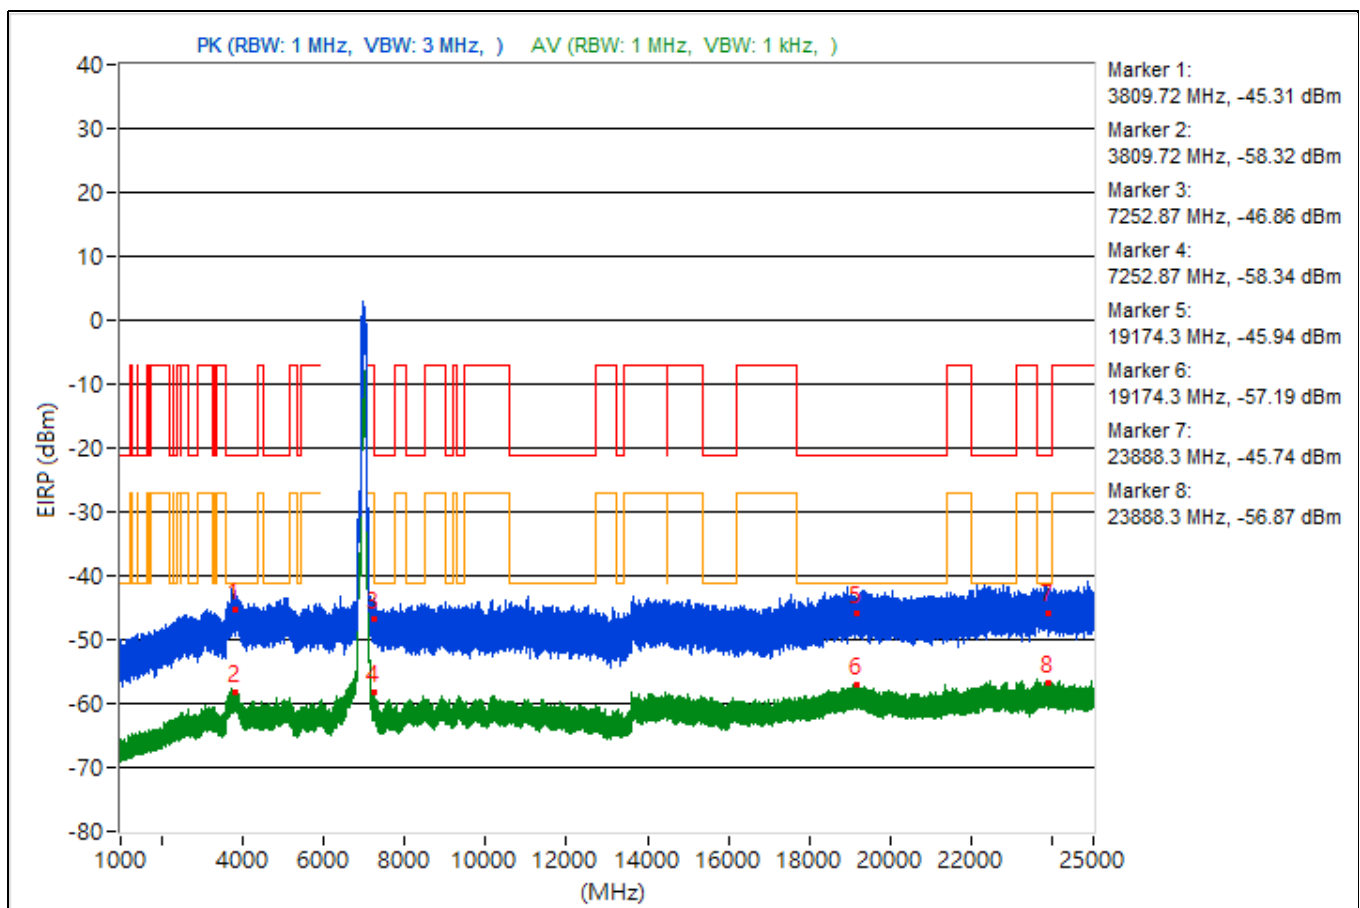

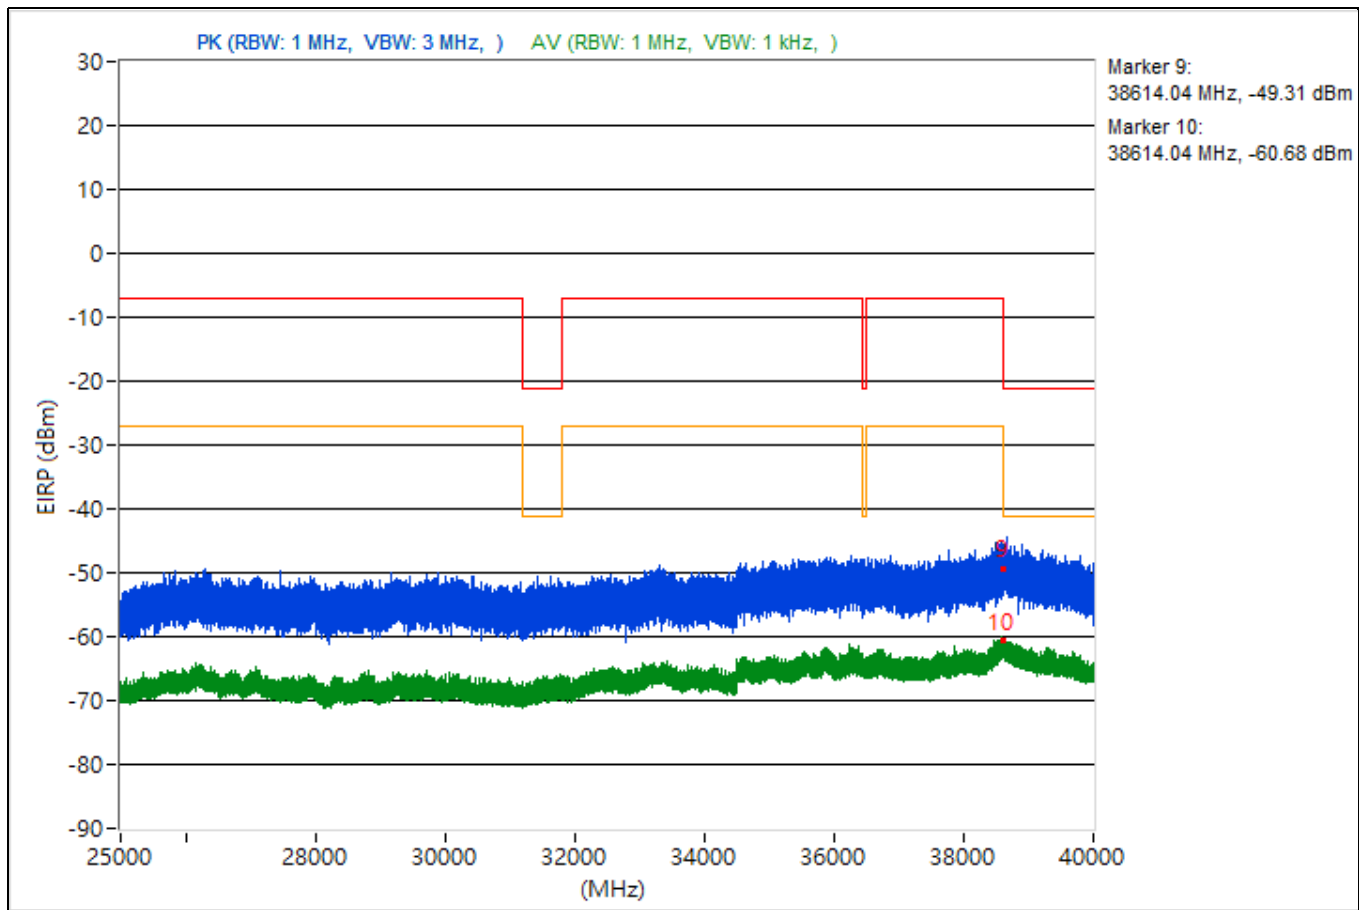


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5940.65	98.47 PK			-7.38	-7.76	7.77	3.21
2	*5940.65	89.49 AV			-15.97	-17.22	7.77	-5.77
3	#5924.98	68.03 PK	88.26	-20.23	-36.18	-41.23	7.77	-27.23
4	#5924.98	49.16 AV	68.26	-19.1	-56.6	-57.19	7.77	-46.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

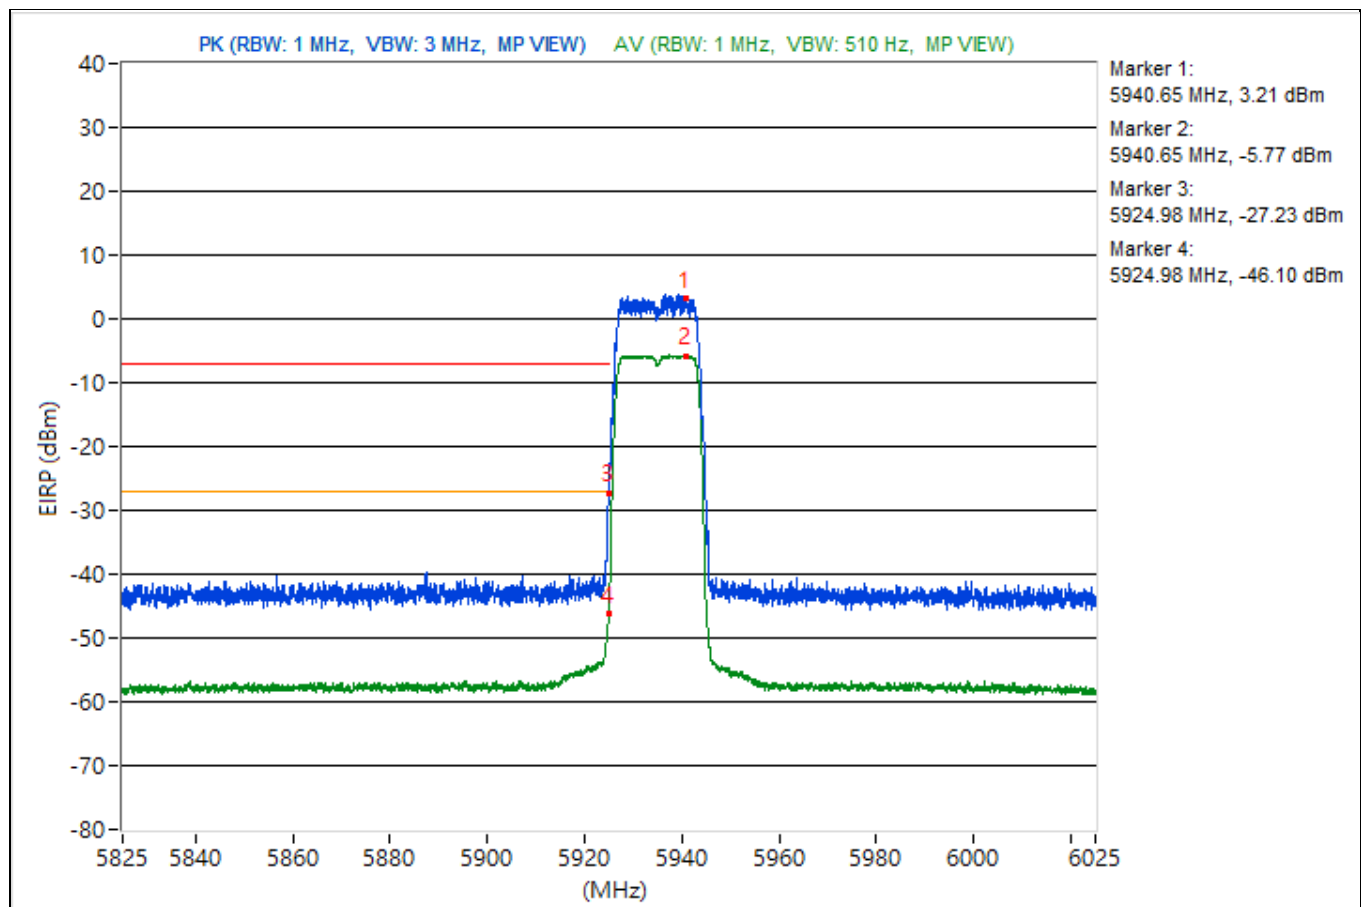


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.45	101.63 PK			-4.11	-4.73	7.77	6.37
2	*5956.45	94.63 AV			-11.24	-11.59	7.77	-0.63
3	#5914	62.07 PK	88.26	-26.19	-44.52	-43.48	7.77	-33.19
4	#5914	54.58 AV	68.26	-13.68	-51.7	-51.23	7.77	-40.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

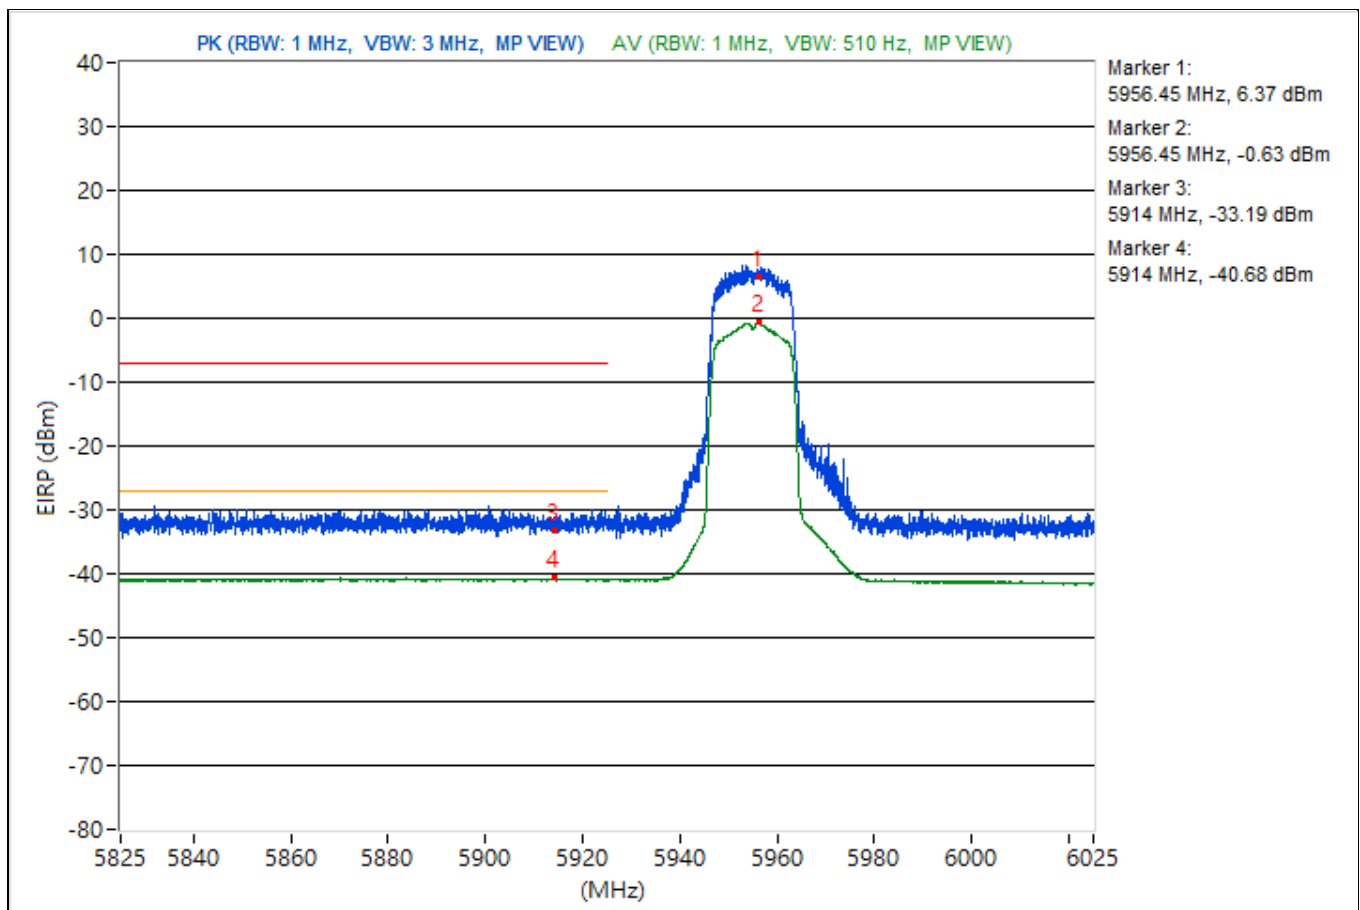


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.05	104.64 PK			0.16	-1.84	7.1	9.38
2	*7116.05	95.74 AV			-8.96	-10.41	7.1	0.48
3	#7125	71.07 PK	88.26	-17.19	-32.45	-37.62	7.1	-24.19
4	#7125	57.57 AV	68.26	-10.69	-47.53	-48.09	7.1	-37.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

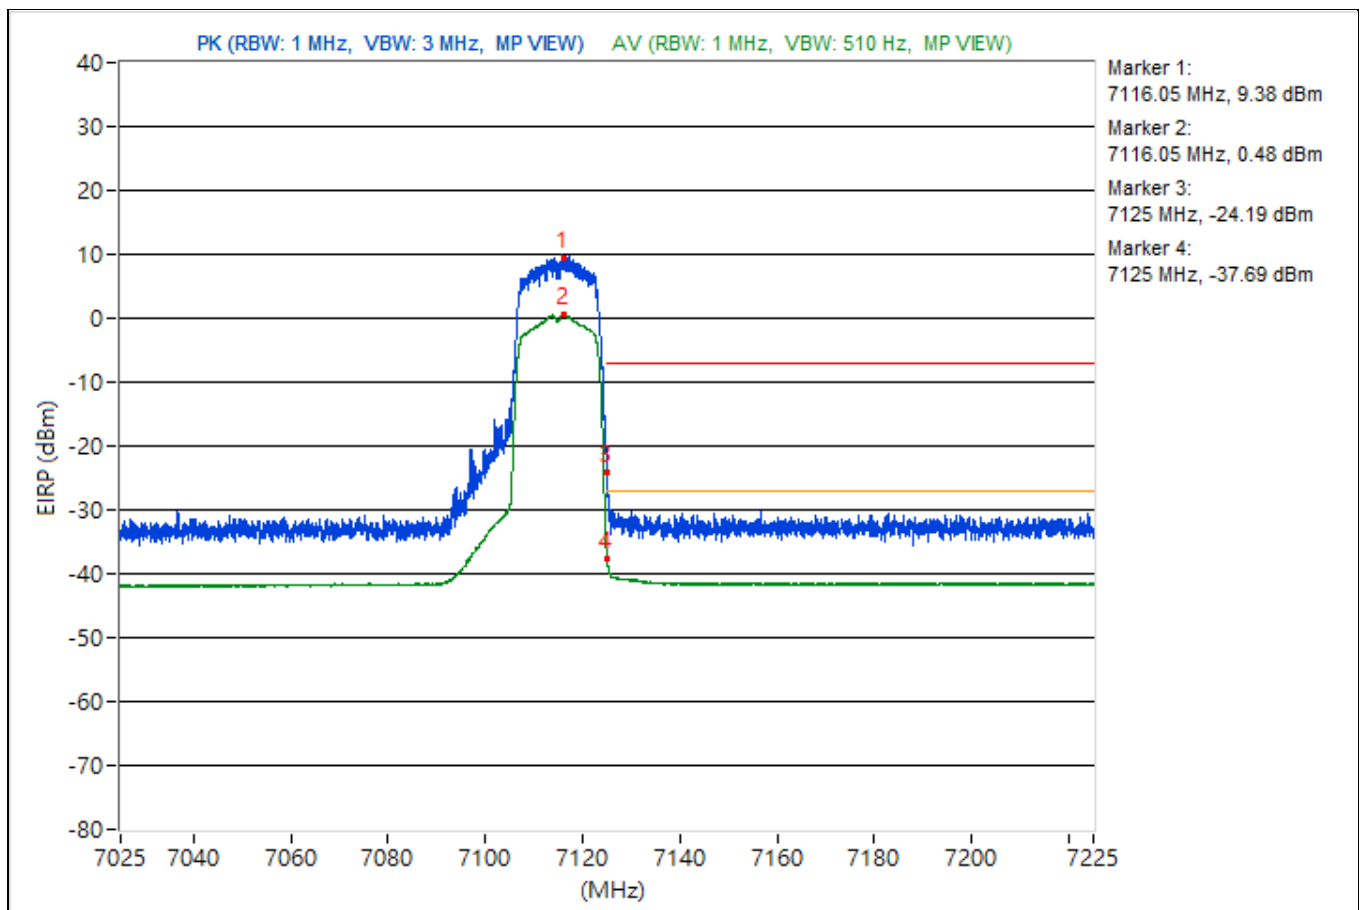


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.95	97.79 PK			-5.34	-5.15	4.76	2.53
2	*5935.95	89.85 AV			-12.92	-13.46	4.76	-5.41
3	#5924.98	86.91 PK	88.26	-1.35	-16.92	-15.45	4.76	-8.35
4	!#5924.98	77.33 AV	68.26	9.07	-25.35	-26.07	4.76	-17.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

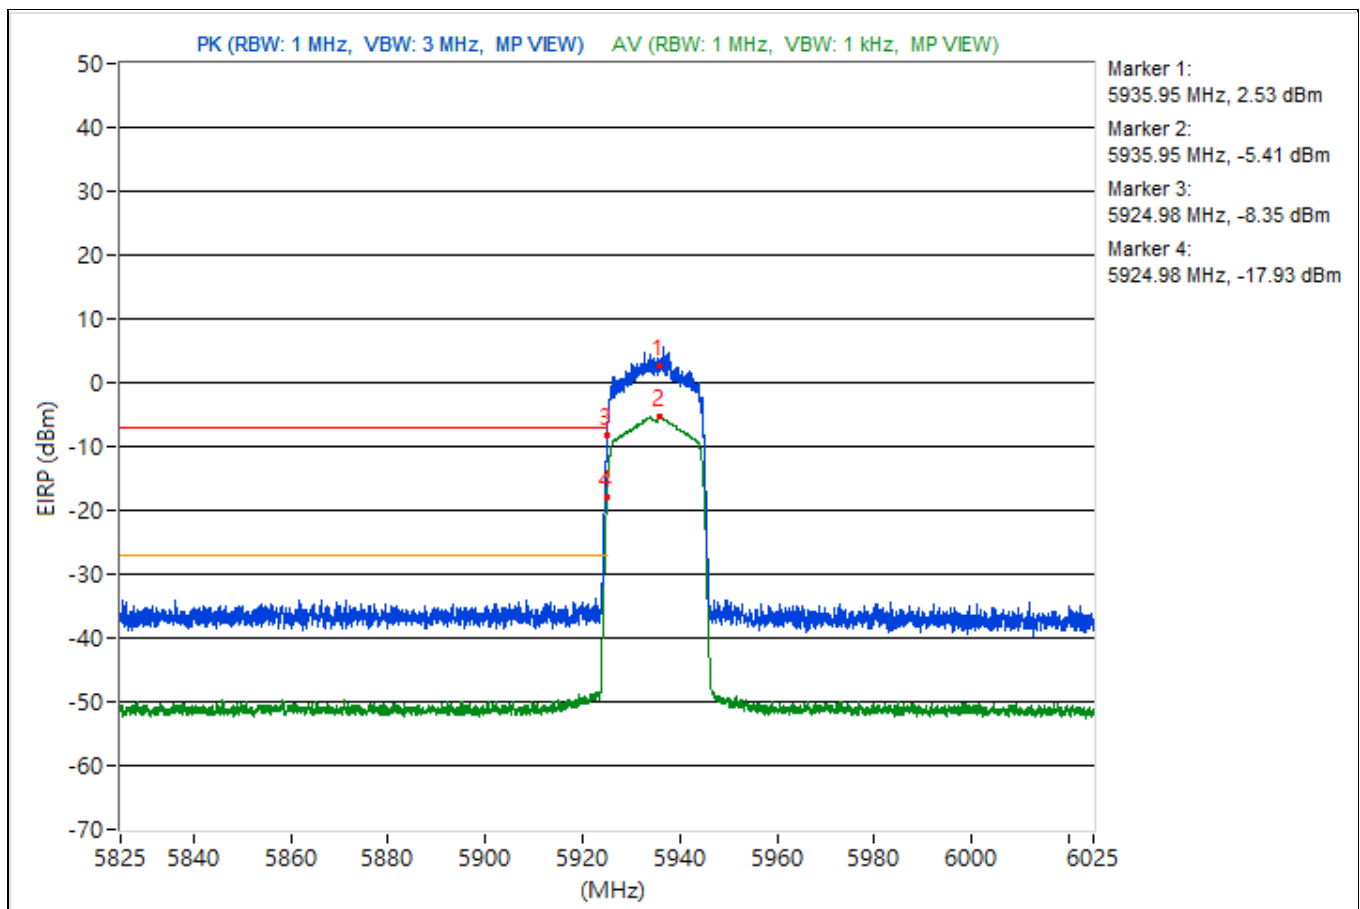


For Integration method:

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	46.23 AV	68.2	-21.97	-56.39	-57.25	4.76	-49.03

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

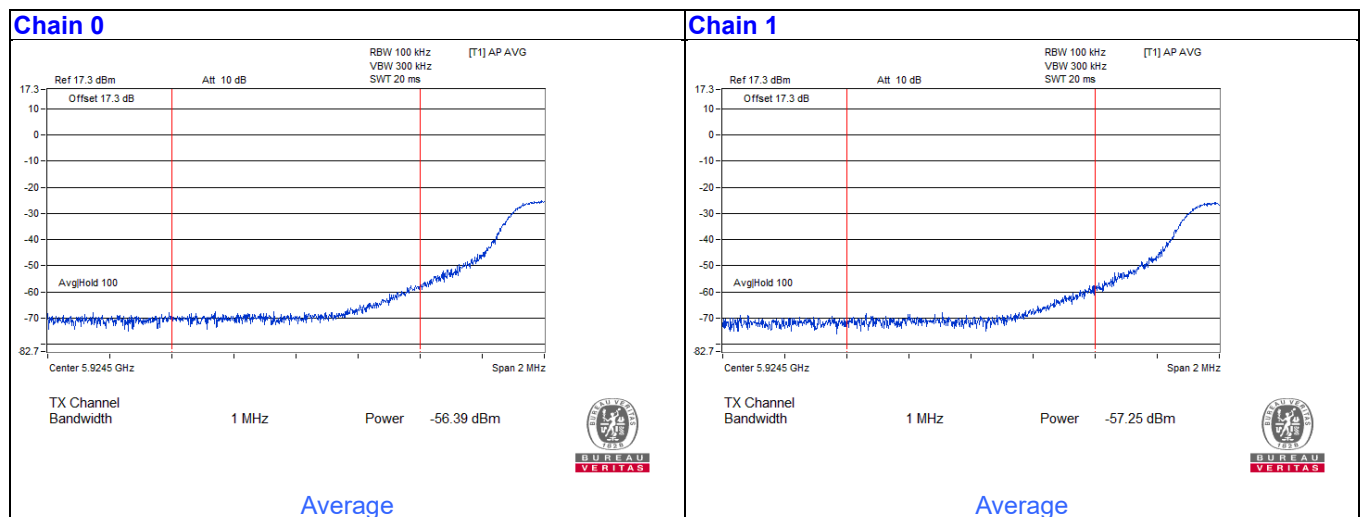


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.87	100.04 PK			-3.21	-2.79	4.76	4.78
2	*5955.87	91.24 AV			-11.69	-11.89	4.76	-4.02
3	#5859.48	60.02 PK	88.26	-28.24	-42.26	-43.92	4.76	-35.24
4	#5859.48	51.39 AV	68.26	-16.87	-51.4	-51.9	4.76	-43.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

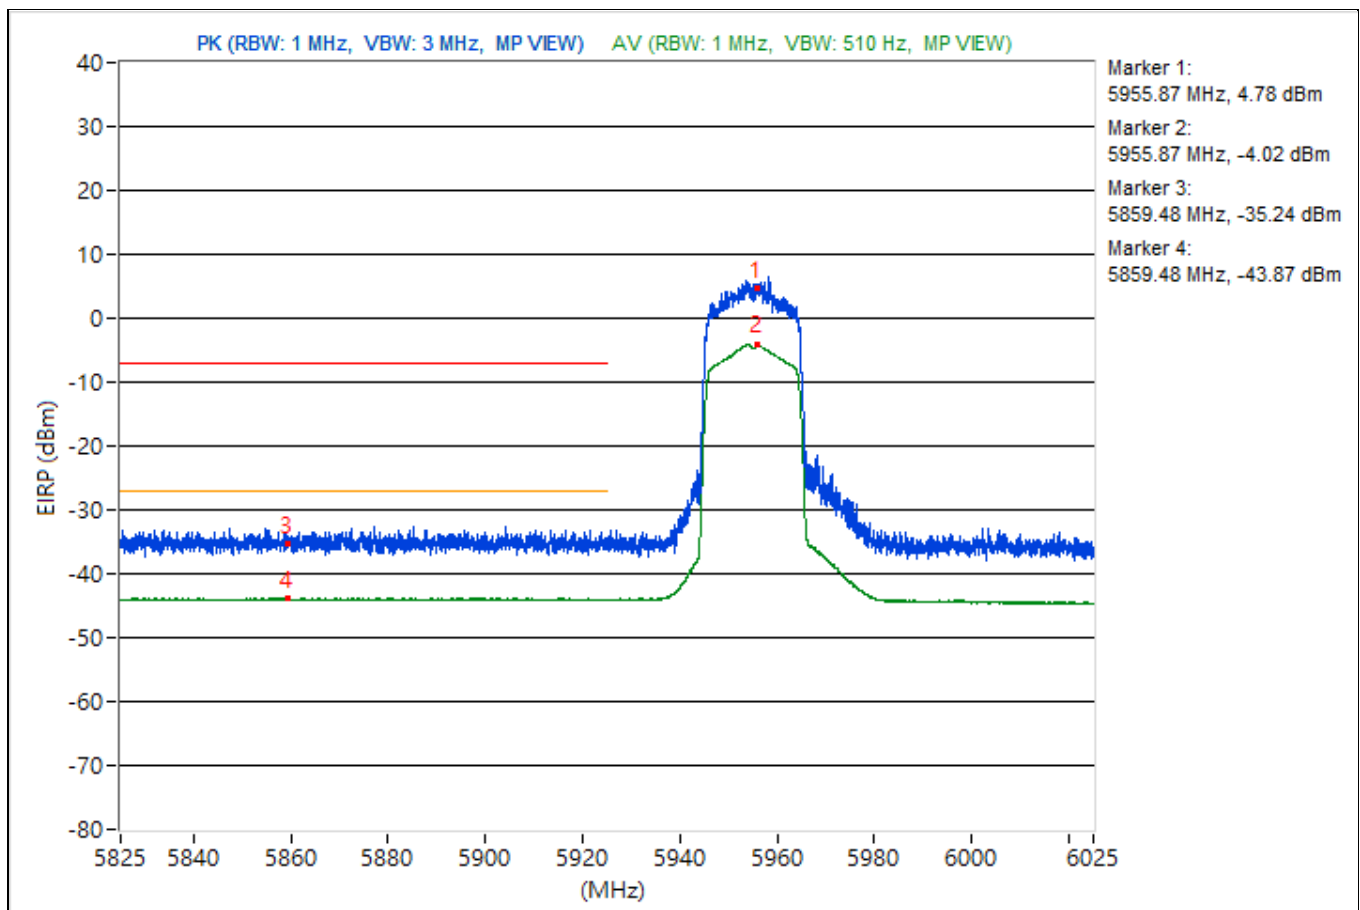


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	22°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.18	98.11 PK			-3.2	-5.65	4.09	2.85
2	*7116.18	90.56 AV			-11.19	-12.51	4.09	-4.7
3	#7125	87.38 PK	88.26	-0.88	-14.76	-15.22	4.09	-7.88
4	!#7125	78.48 AV	68.26	10.22	-23.33	-24.52	4.09	-16.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

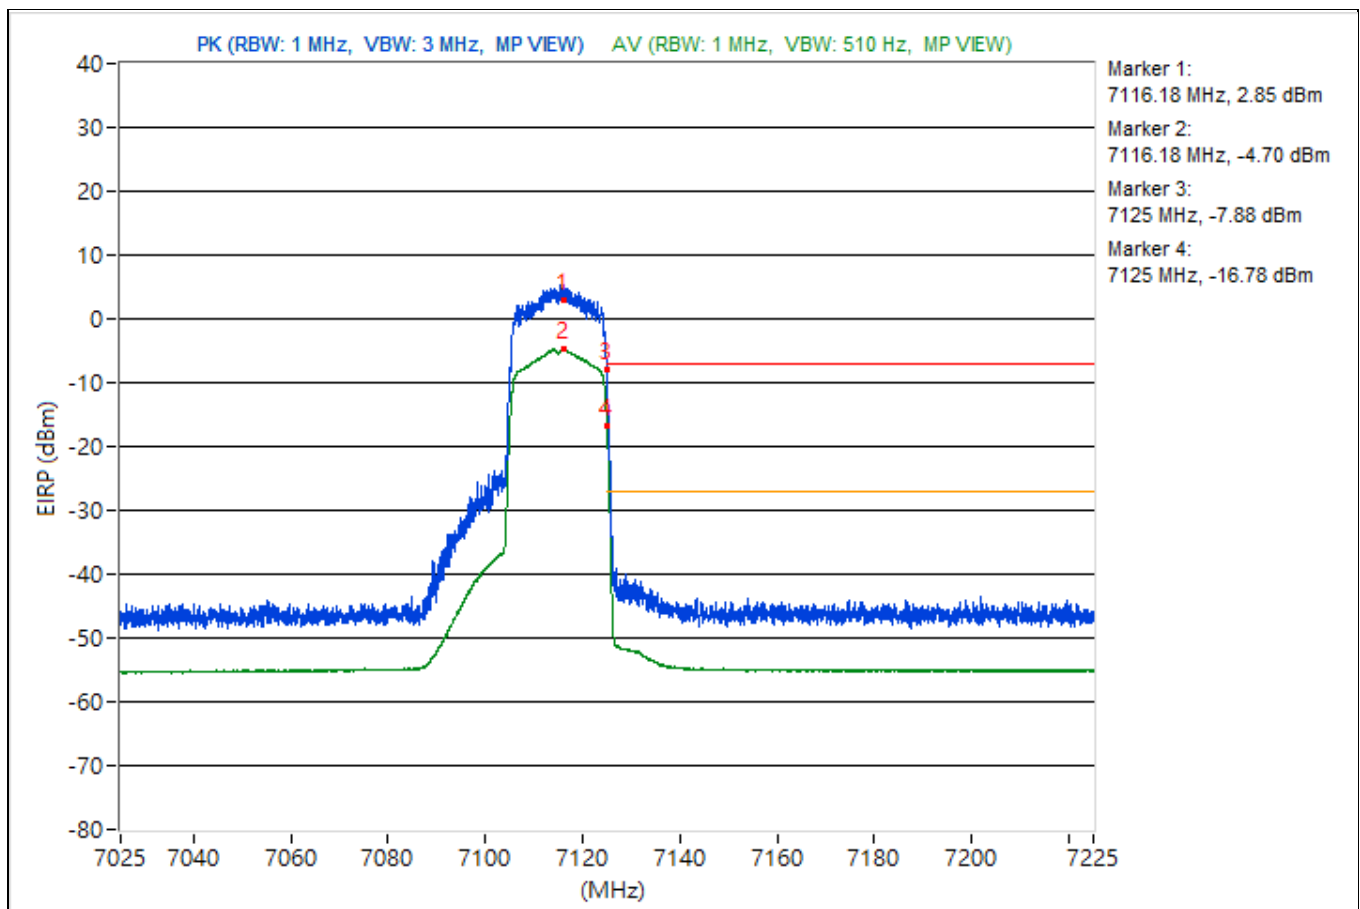


For Integration method:

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	47.36 AV	68.2	-20.84	-53.99	-56.33	4.09	-47.90

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

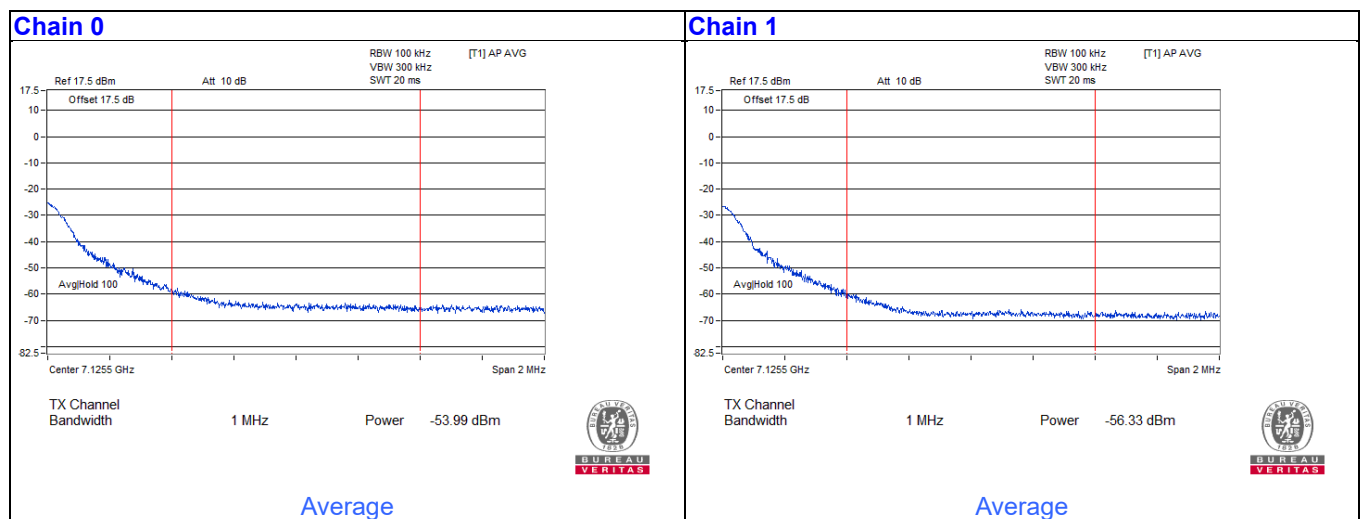


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5966.57	99.28 PK			-4.17	-3.37	4.76	4.02
2	*5966.57	91.52 AV			-11.41	-11.61	4.76	-3.74
3	#5922.55	60.51 PK	88.26	-27.75	-41.42	-43.99	4.76	-34.75
4	#5922.55	51.42 AV	68.26	-16.84	-51.54	-51.69	4.76	-43.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

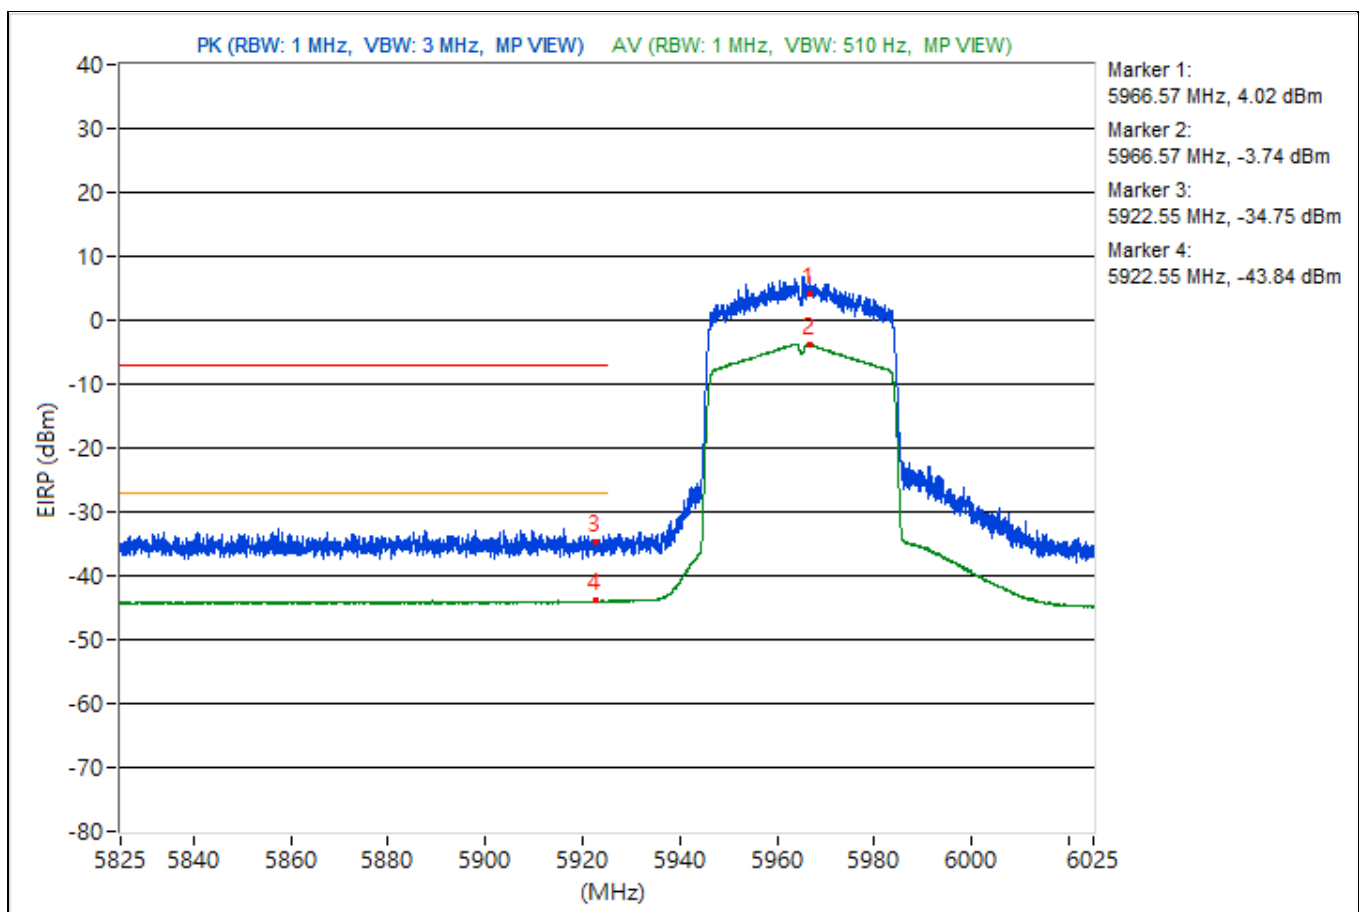


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7083.82	101.01 PK			-0.83	-1.94	4.09	5.75
2	*7083.82	92.64 AV			-9.16	-10.37	4.09	-2.62
3	#7127.52	58.8 PK	88.26	-29.46	-42.81	-44.46	4.09	-36.46
4	#7127.52	50.55 AV	68.26	-17.71	-51.86	-51.76	4.09	-44.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

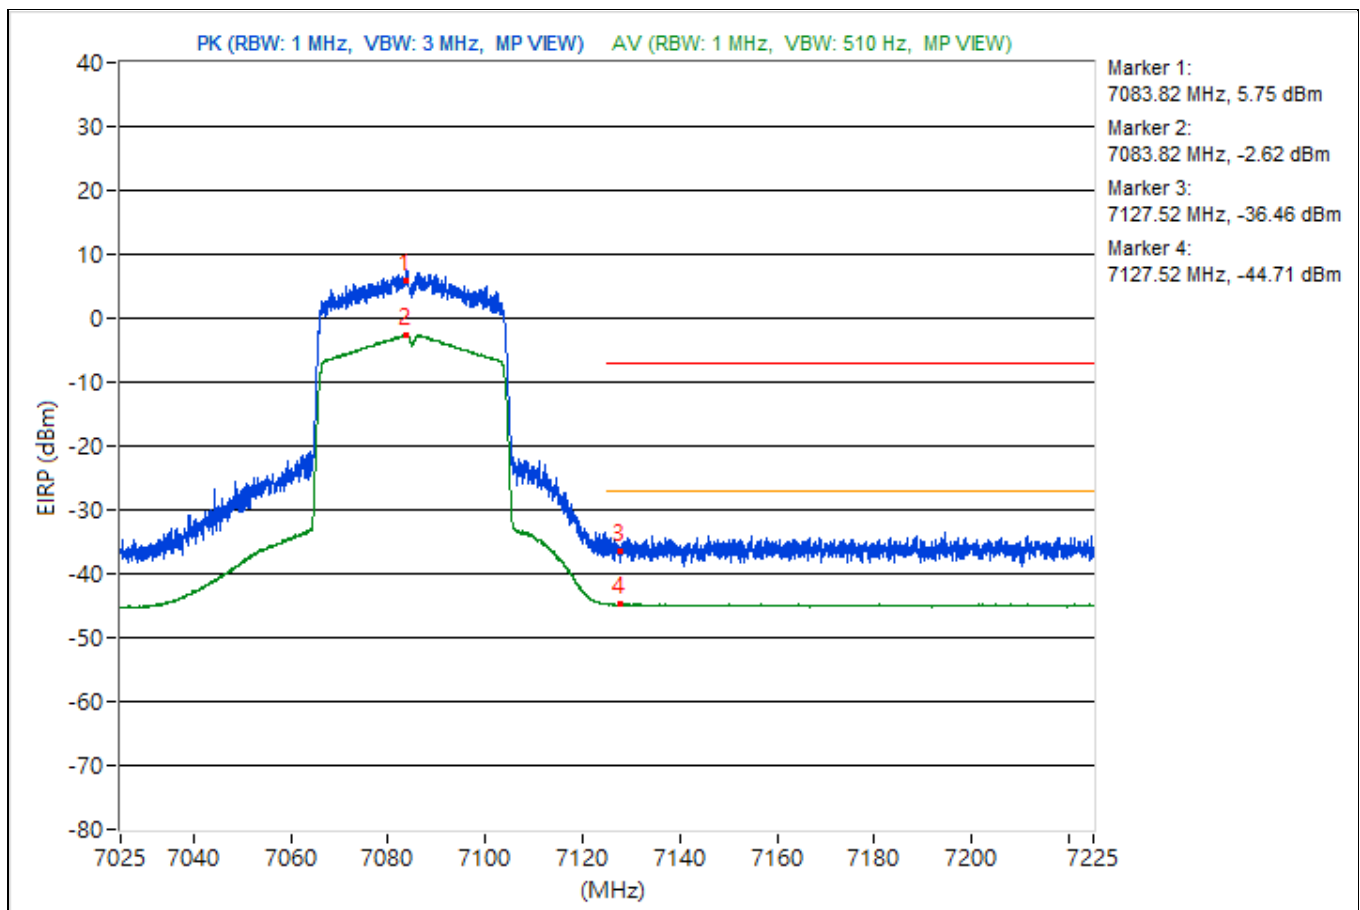


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5983.18	100.5 PK			-1.53	-3.84	4.76	5.24
2	*5983.18	91.69 AV			-11.2	-11.49	4.76	-3.57
3	#5923.02	60.44 PK	88.26	-27.82	-43.43	-41.88	4.76	-34.82
4	#5923.02	52.01 AV	68.26	-16.25	-50.88	-51.15	4.76	-43.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

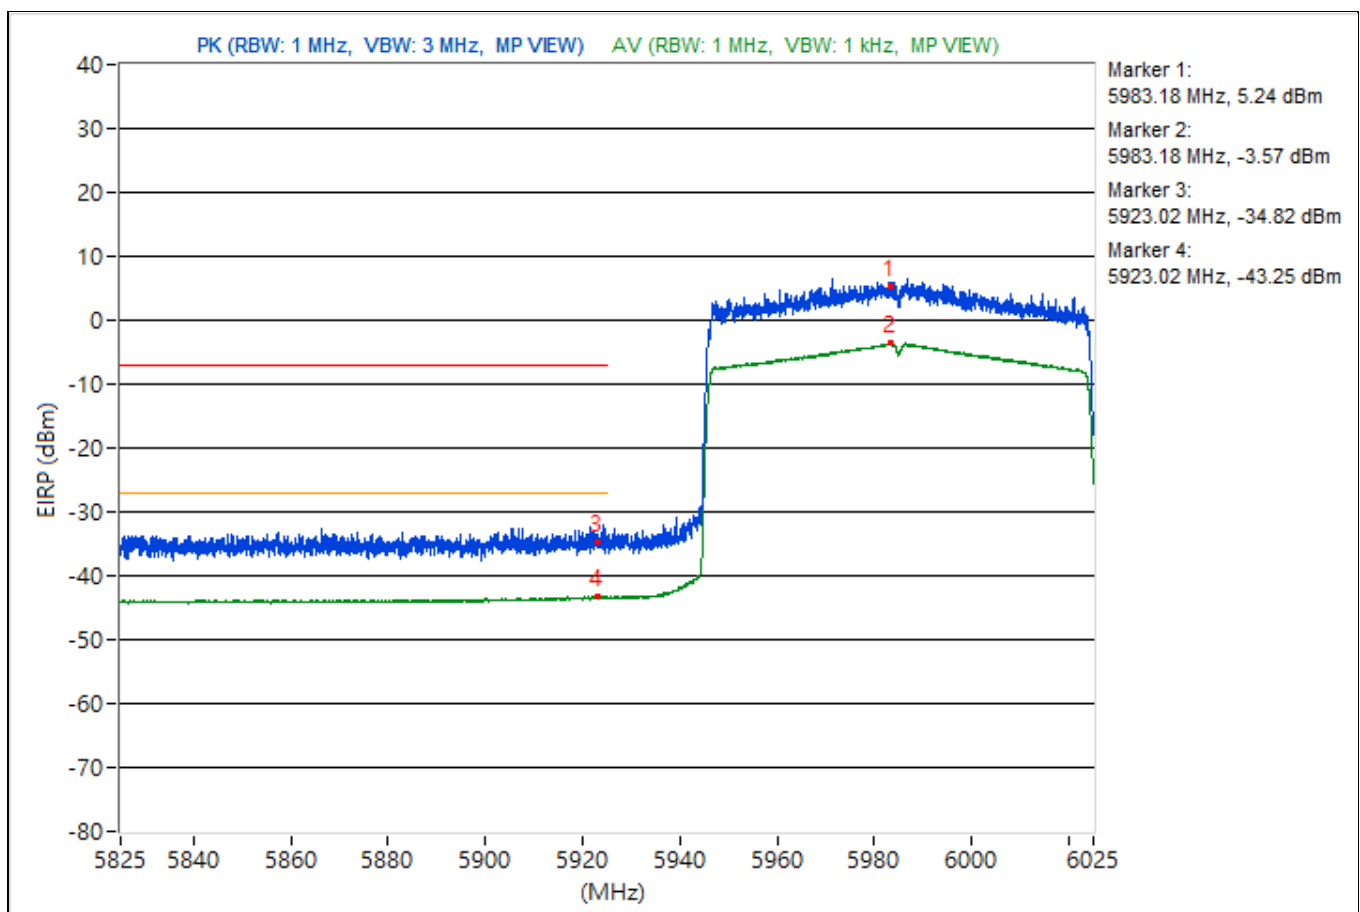


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7027	100.9 PK			-0.55	-2.62	4.09	5.64
2	*7027	92.67 AV			-9.31	-10.09	4.09	-2.59
3	#7214.44	58.42 PK	88.26	-29.84	-42.8	-45.49	4.09	-36.84
4	#7214.44	50.7 AV	68.26	-17.56	-51.9	-51.43	4.09	-44.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

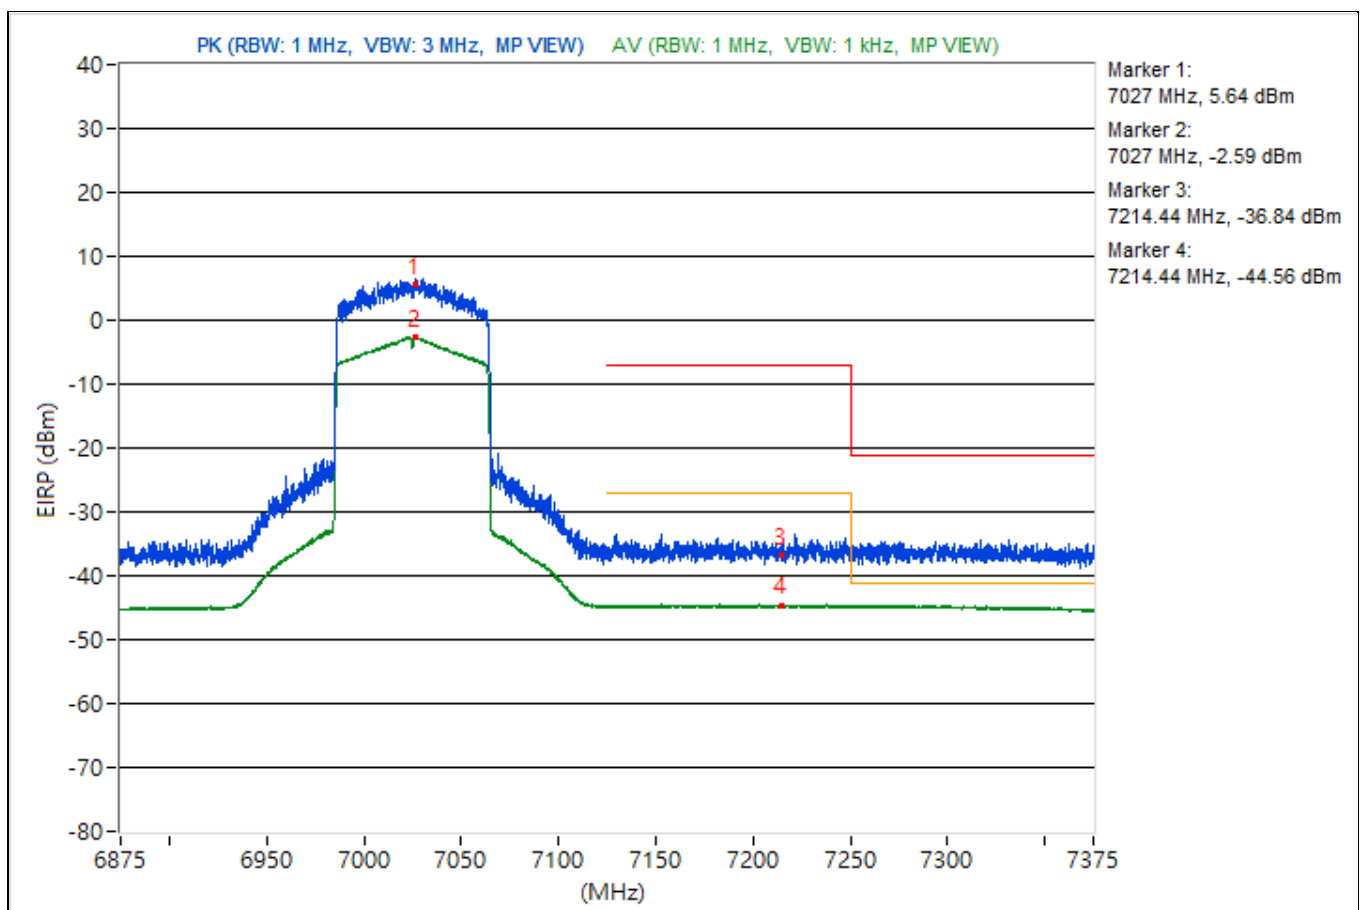


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6023.23	97.23 PK			-5.49	-6.15	4.76	1.97
2	*6023.23	89.45 AV			-13.62	-13.55	4.76	-5.81
3	#5922.23	60.01 PK	88.26	-28.25	-43.45	-42.62	4.76	-35.25
4	#5922.23	52.61 AV	68.26	-15.65	-50.56	-50.3	4.76	-42.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

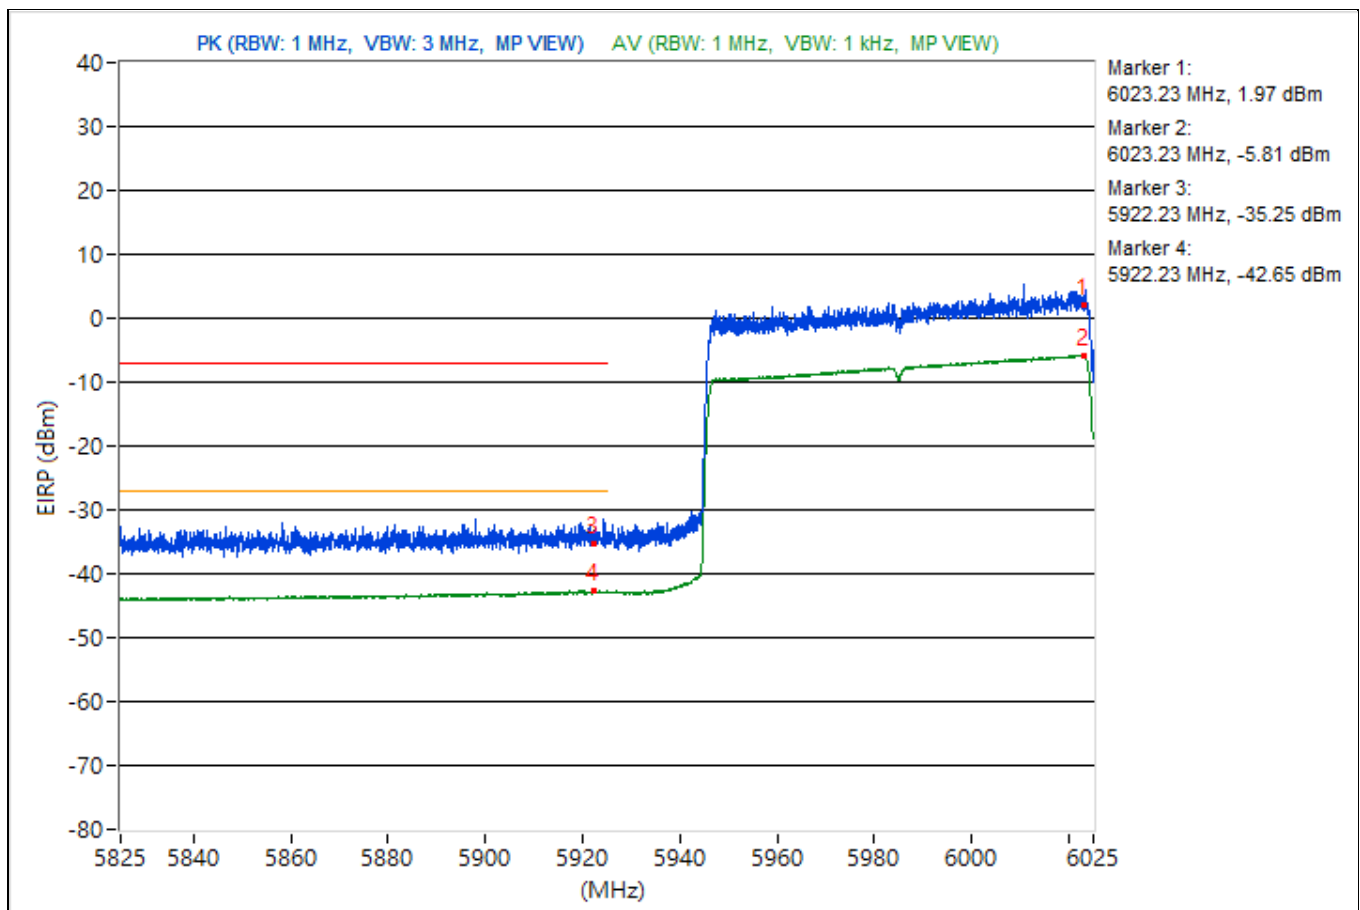


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6986.69	97.76 PK			-3.69	-5.75	4.09	2.5
2	*6986.69	89.74 AV			-12.05	-13.28	4.09	-5.52
3	#7125.31	60.94 PK	88.26	-27.32	-40.97	-41.93	4.09	-34.32
4	#7125.31	52.84 AV	68.26	-15.42	-49.51	-49.53	4.09	-42.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

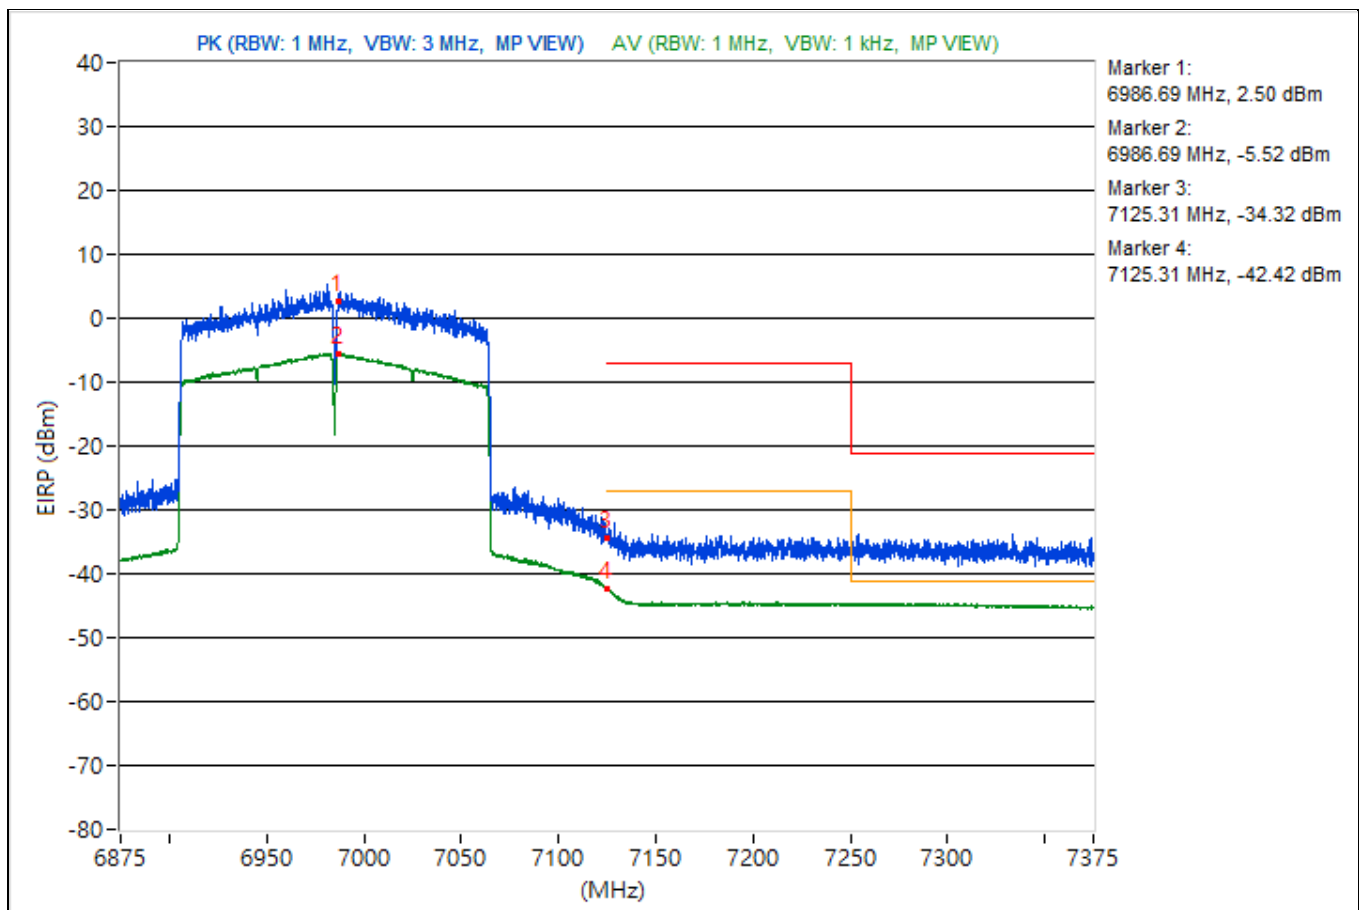


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.55	97.85 PK			-5.55	-4.84	4.76	2.59
2	*5926.55	89.24 AV			-14.26	-13.36	4.76	-6.02
3	#5924.98	87.16 PK	88.26	-1.1	-16.36	-15.43	4.76	-8.1
4	!#5924.98	79.77 AV	68.26	11.51	-23.62	-22.93	4.76	-15.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

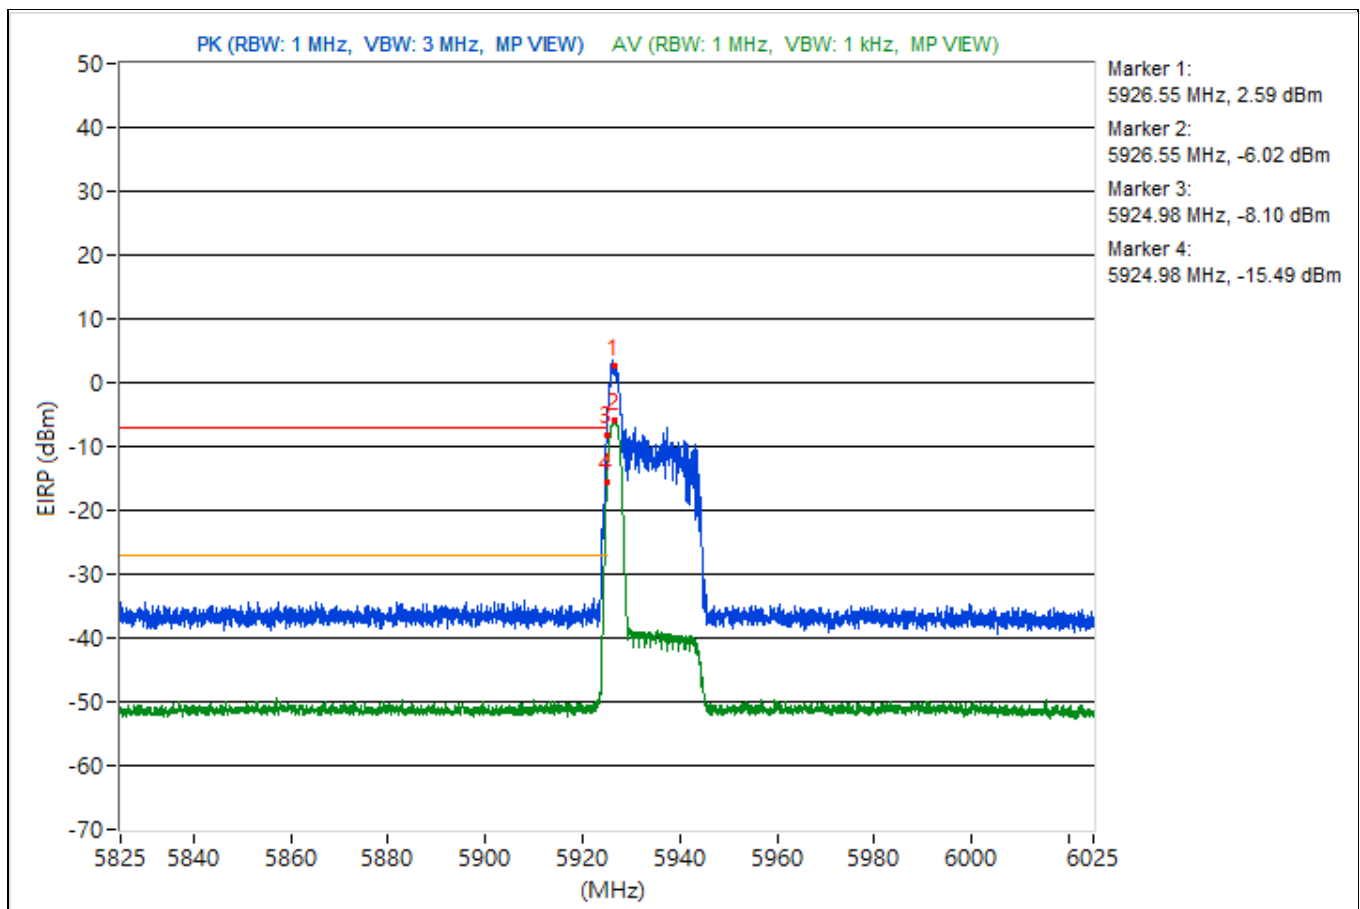


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	57.92 AV	68.2	-10.28	-44.53	-45.77	4.76	-37.34

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

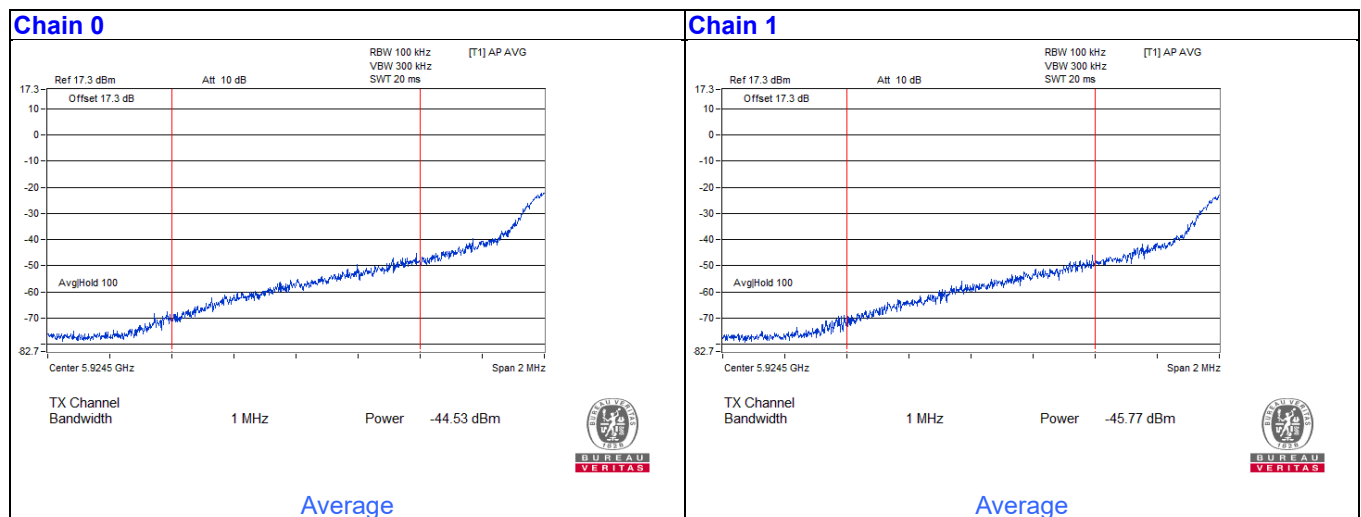


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.25	99.37 PK			-3.51	-3.81	4.76	4.11
2	*5946.25	90.31 AV			-12.55	-12.88	4.76	-4.95
3	#5873.65	49.99 PK	88.26	-38.27	-53.43	-52.69	4.76	-45.27
4	#5873.65	37.15 AV	68.26	-31.11	-65.1	-66.84	4.76	-58.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

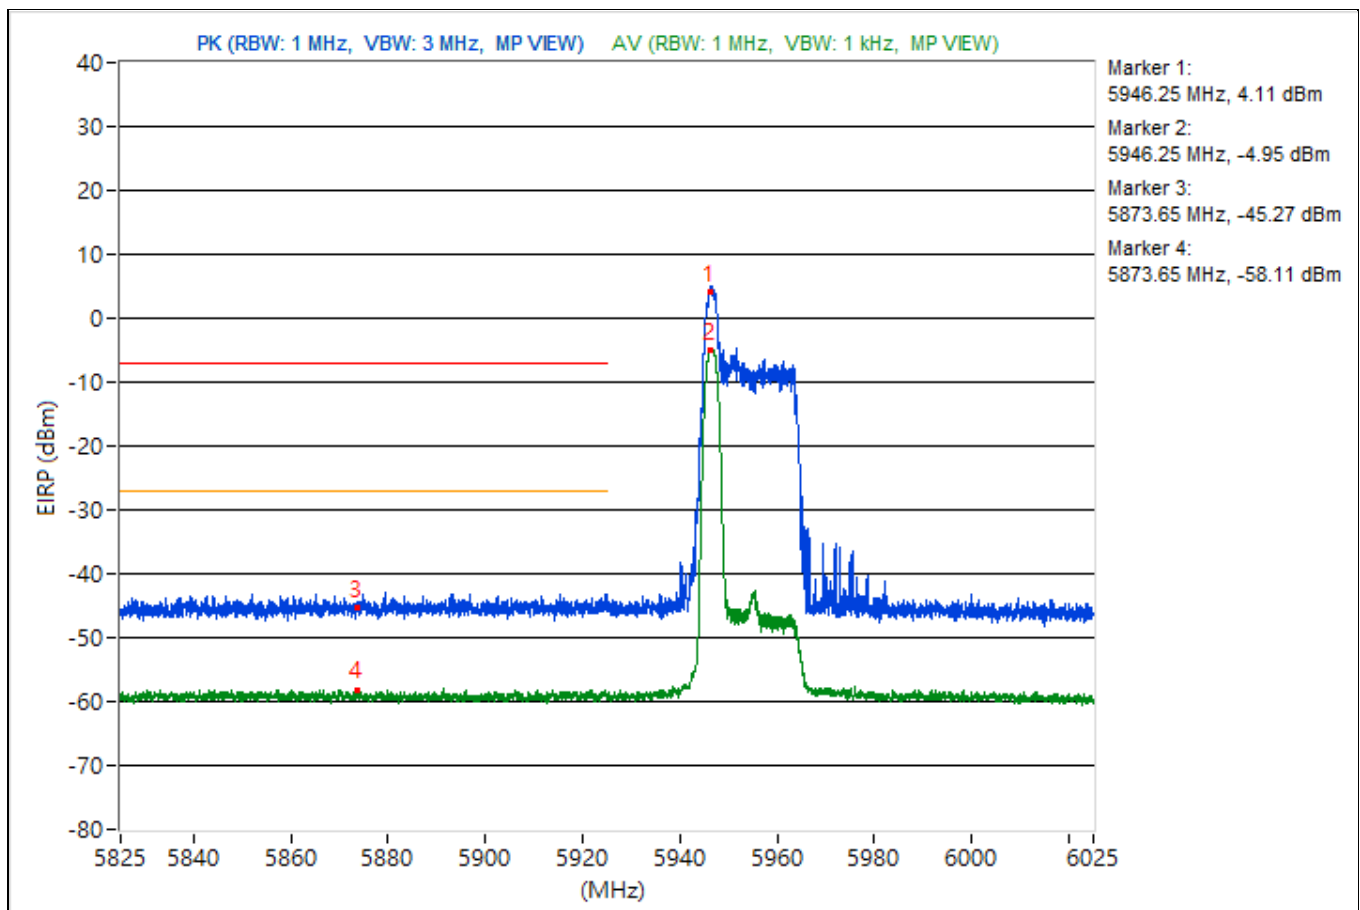


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7123.45	98.38 PK			-2.73	-5.75	4.09	3.12
2	*7123.45	88.77 AV			-12.72	-14.69	4.09	-6.49
3	#7125	88.24 PK	88.26	-0.02	-14.47	-13.79	4.09	-7.02
4	!#7125	78.88 AV	68.26	10.62	-22.6	-24.58	4.09	-16.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

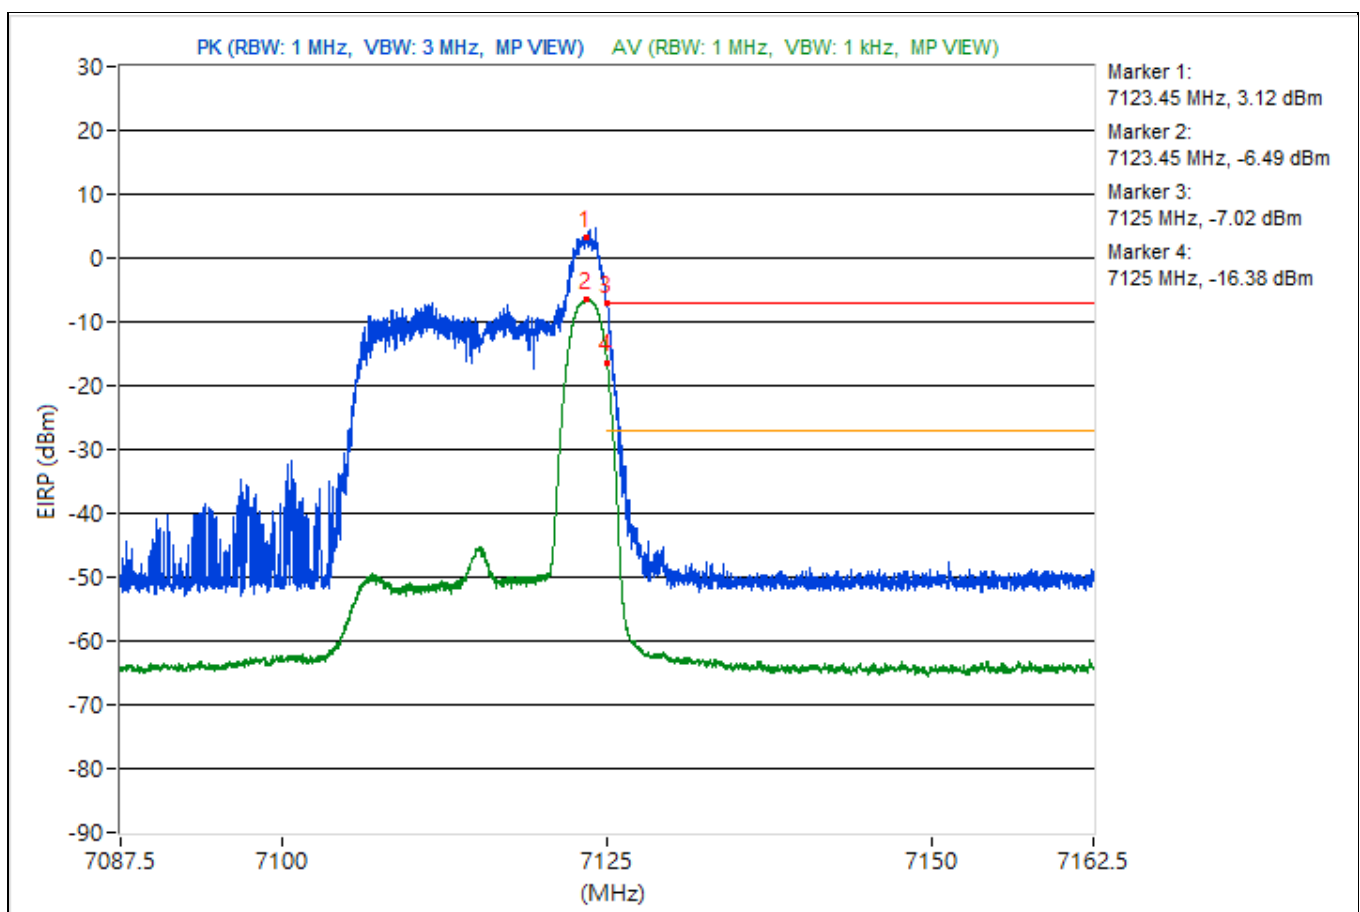


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	55.53 AV	68.2	-12.67	-47.65	-46.14	4.09	-39.73

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

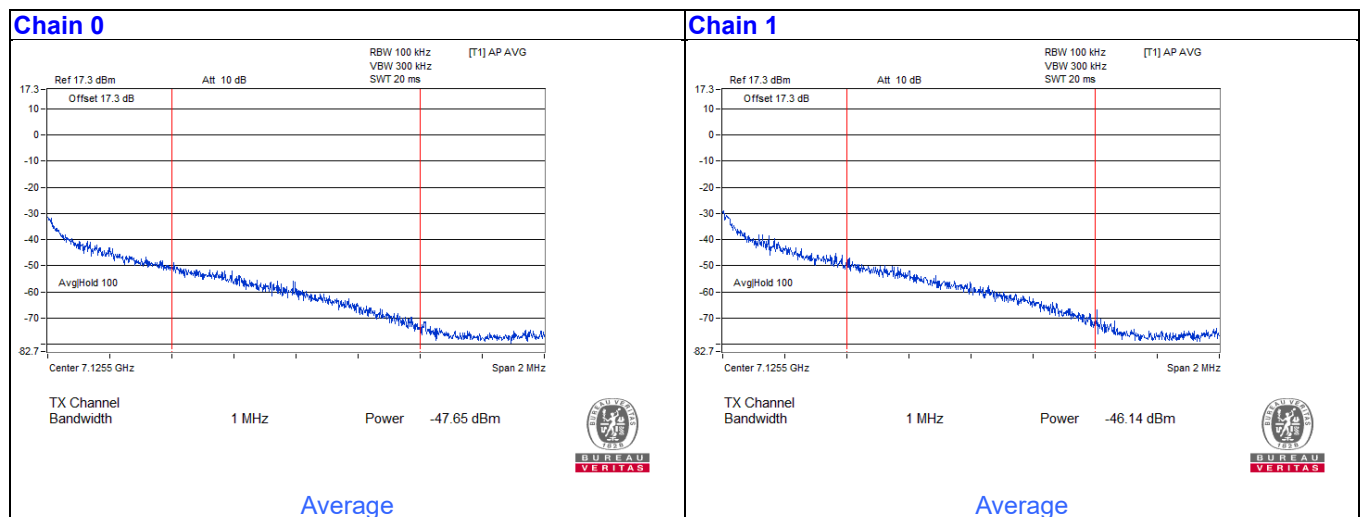


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5928.2	99.71 PK			-3.29	-3.35	4.76	4.45
2	*5928.2	89.57 AV			-12.84	-14.18	4.76	-5.69
3	#5924.98	87.72 PK	88.26	-0.54	-14.73	-15.98	4.76	-7.54
4	!5924.98	79.77 AV	68.26	11.51	-22.81	-23.76	4.76	-15.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

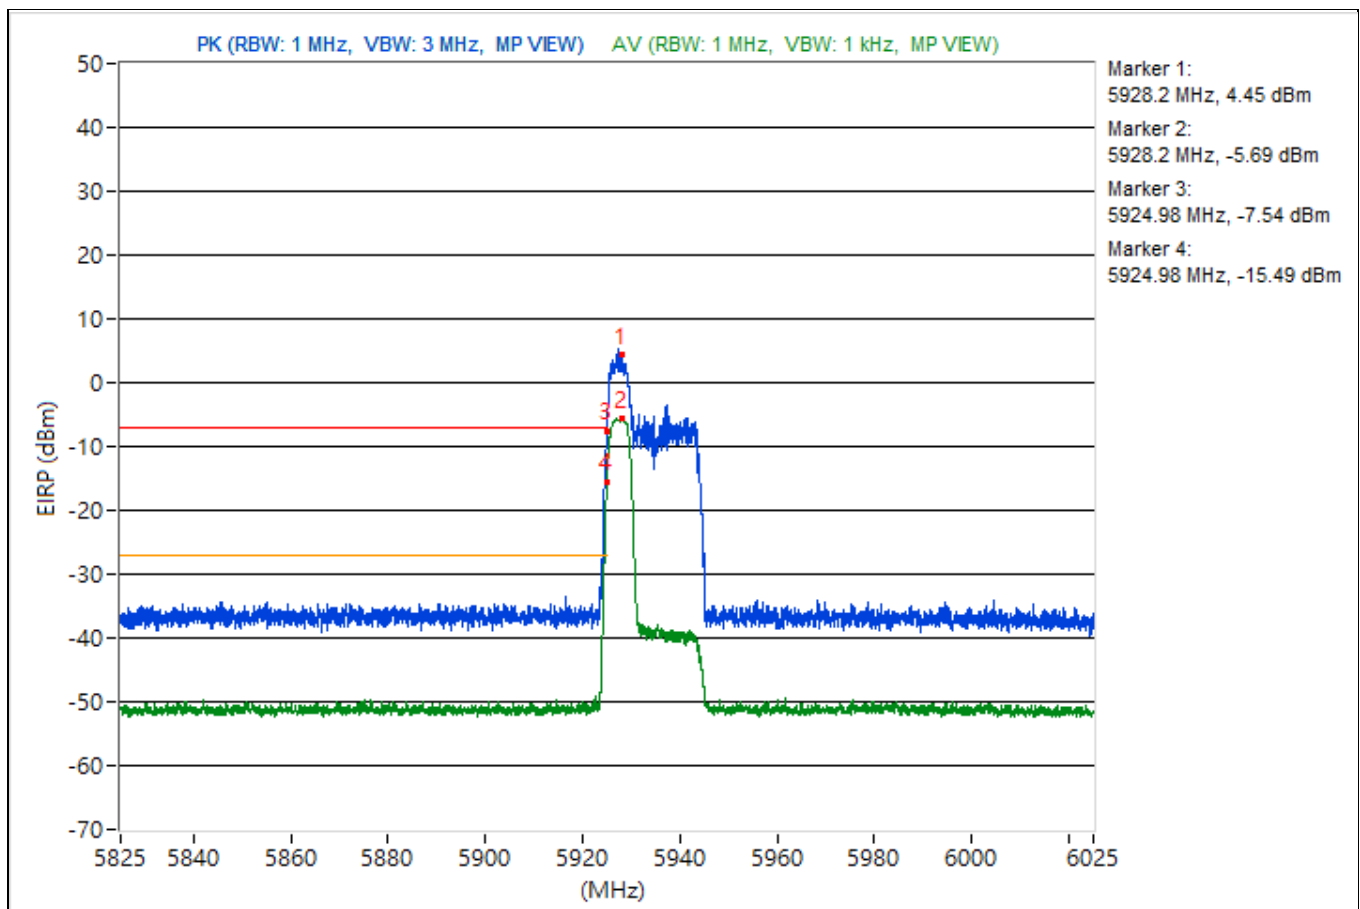


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	54.25 AV	68.2	-13.95	-54.1	-45.68	4.09	-41.01

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

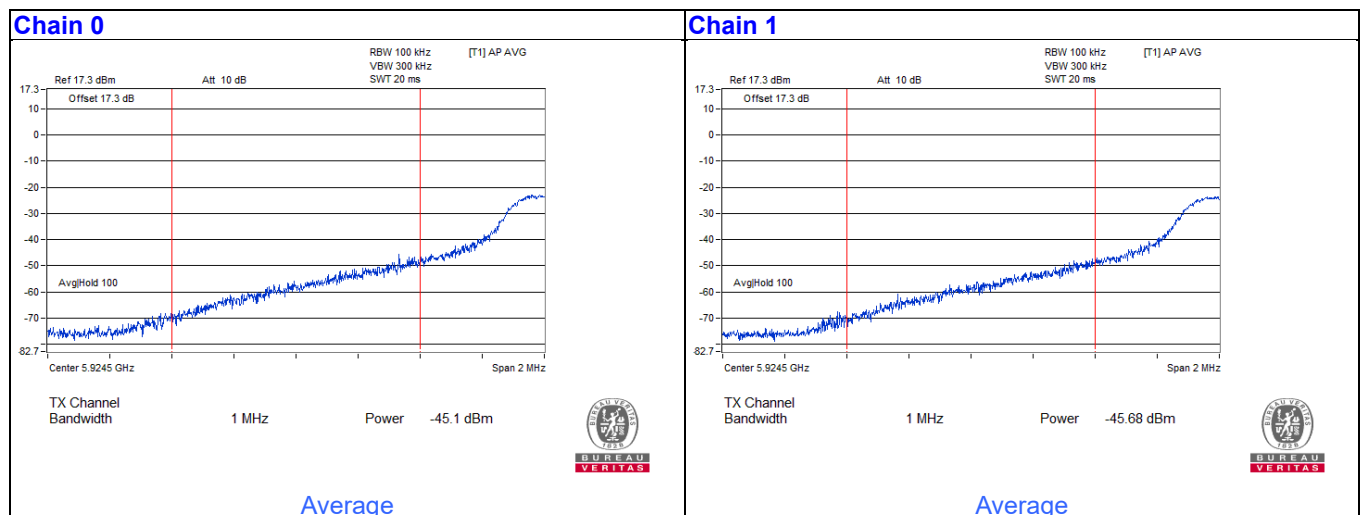


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.1	99.22 PK			-3.33	-4.34	4.76	3.96
2	*5947.1	90.81 AV			-11.69	-12.83	4.76	-4.45
3	#5885	49.45 PK	88.26	-38.81	-54.95	-52.54	4.76	-45.81
4	#5885	36.49 AV	68.26	-31.77	-67.74	-65.59	4.76	-58.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

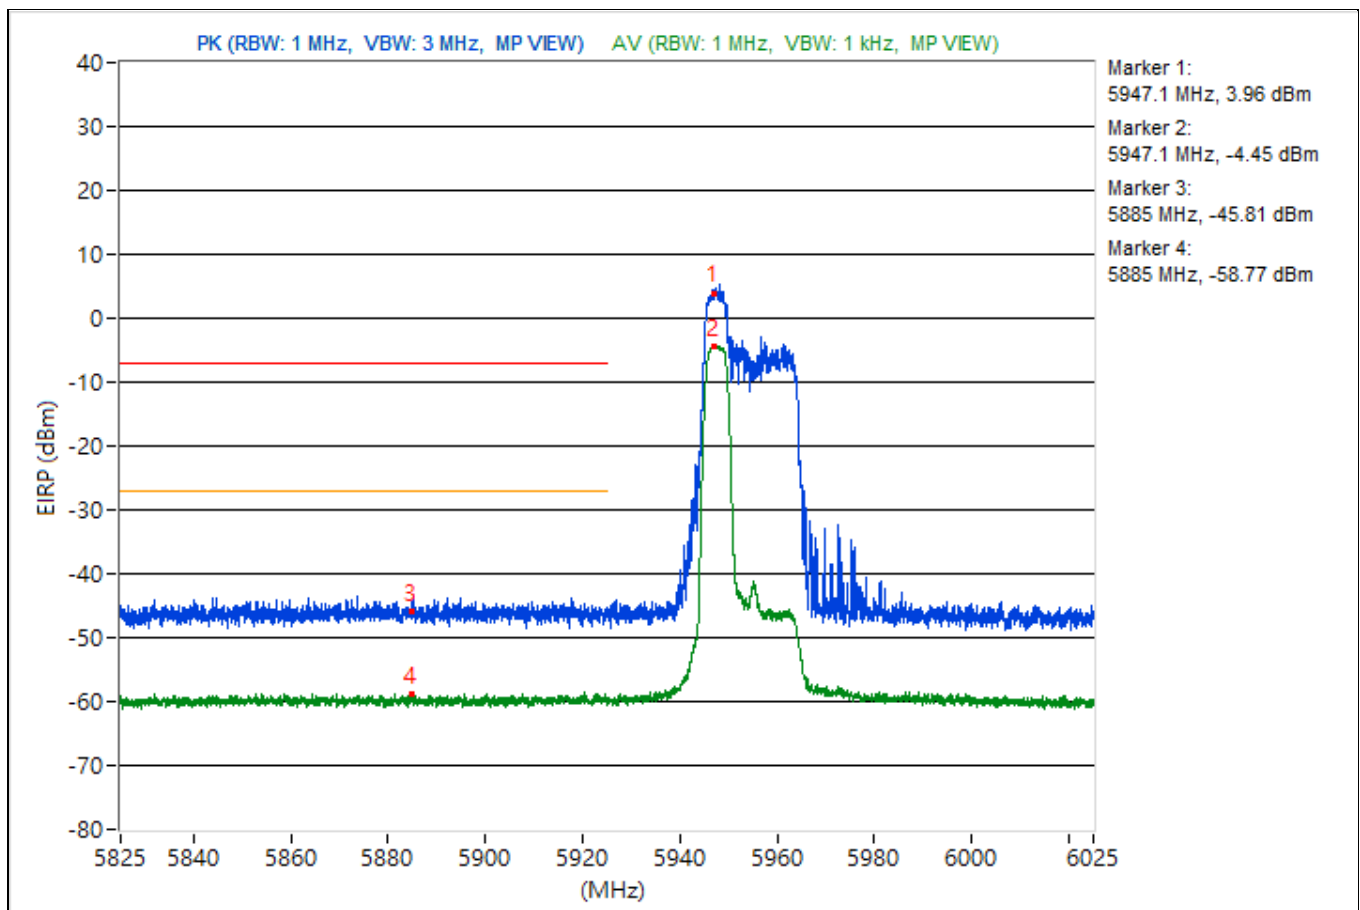


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7122.88	98.4 PK			-3.13	-4.99	4.09	3.14
2	*7122.88	89.57 AV			-12.08	-13.65	4.09	-5.69
3	#7125	87.53 PK	88.26	-0.73	-14.29	-15.46	4.09	-7.73
4	!#7125	79.55 AV	68.26	11.29	-22.07	-23.7	4.09	-15.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

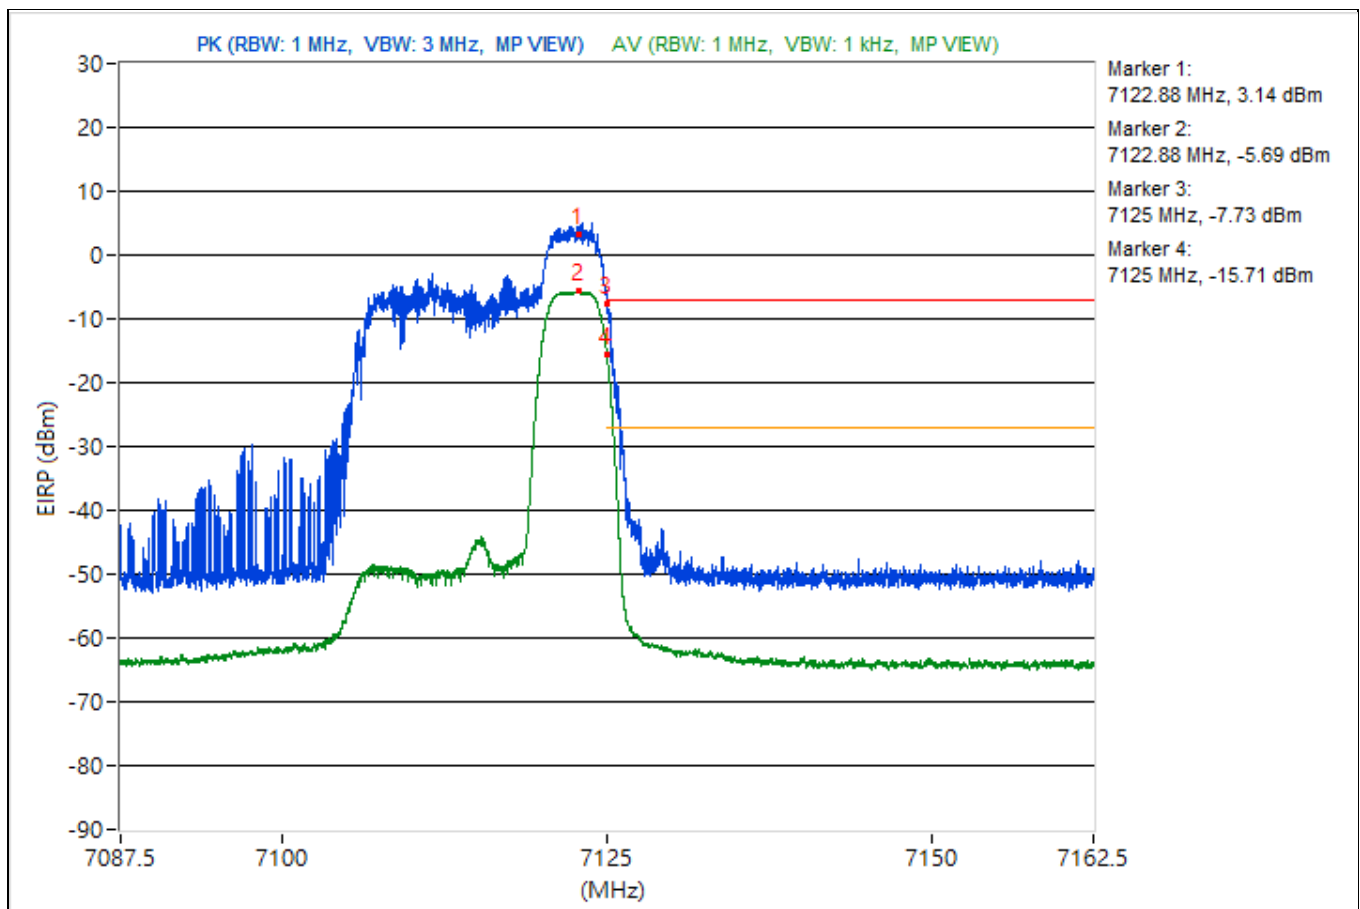


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	55.57 AV	68.2	-12.63	-46.18	-47.49	4.09	-39.69

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

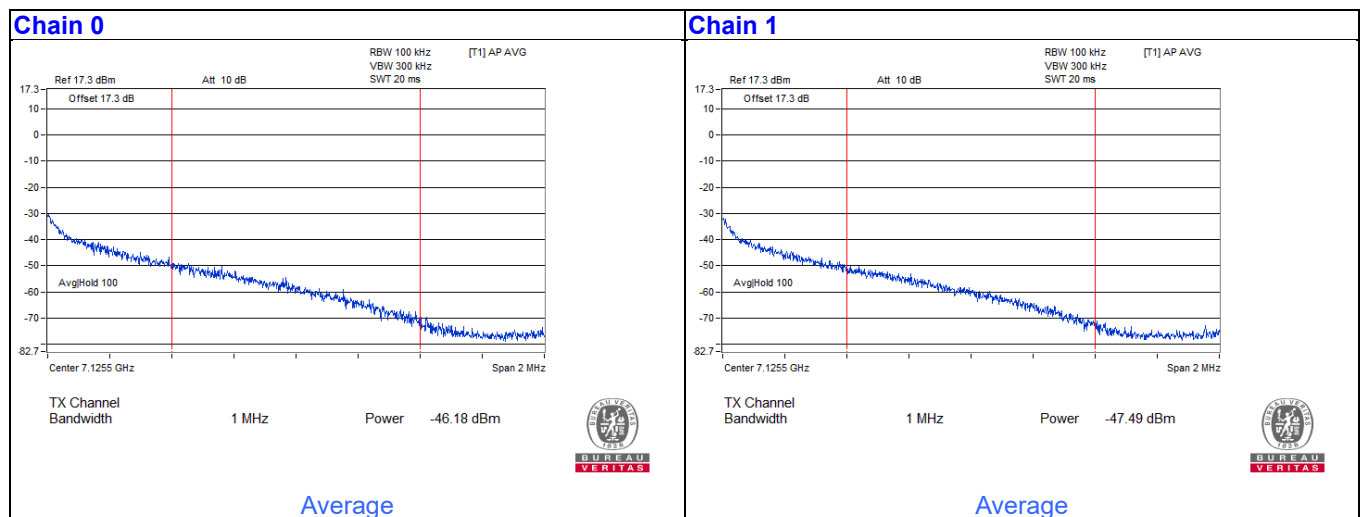


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.6	96.06 PK			-7.17	-6.77	4.76	0.8
2	*5926.6	88.25 AV			-14.15	-15.51	4.76	-7.01
3	#5924.98	88.02 PK	88.26	-0.24	-14.81	-15.22	4.76	-7.24
4	!#5924.98	79.81 AV	68.26	11.55	-22.83	-23.64	4.76	-15.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

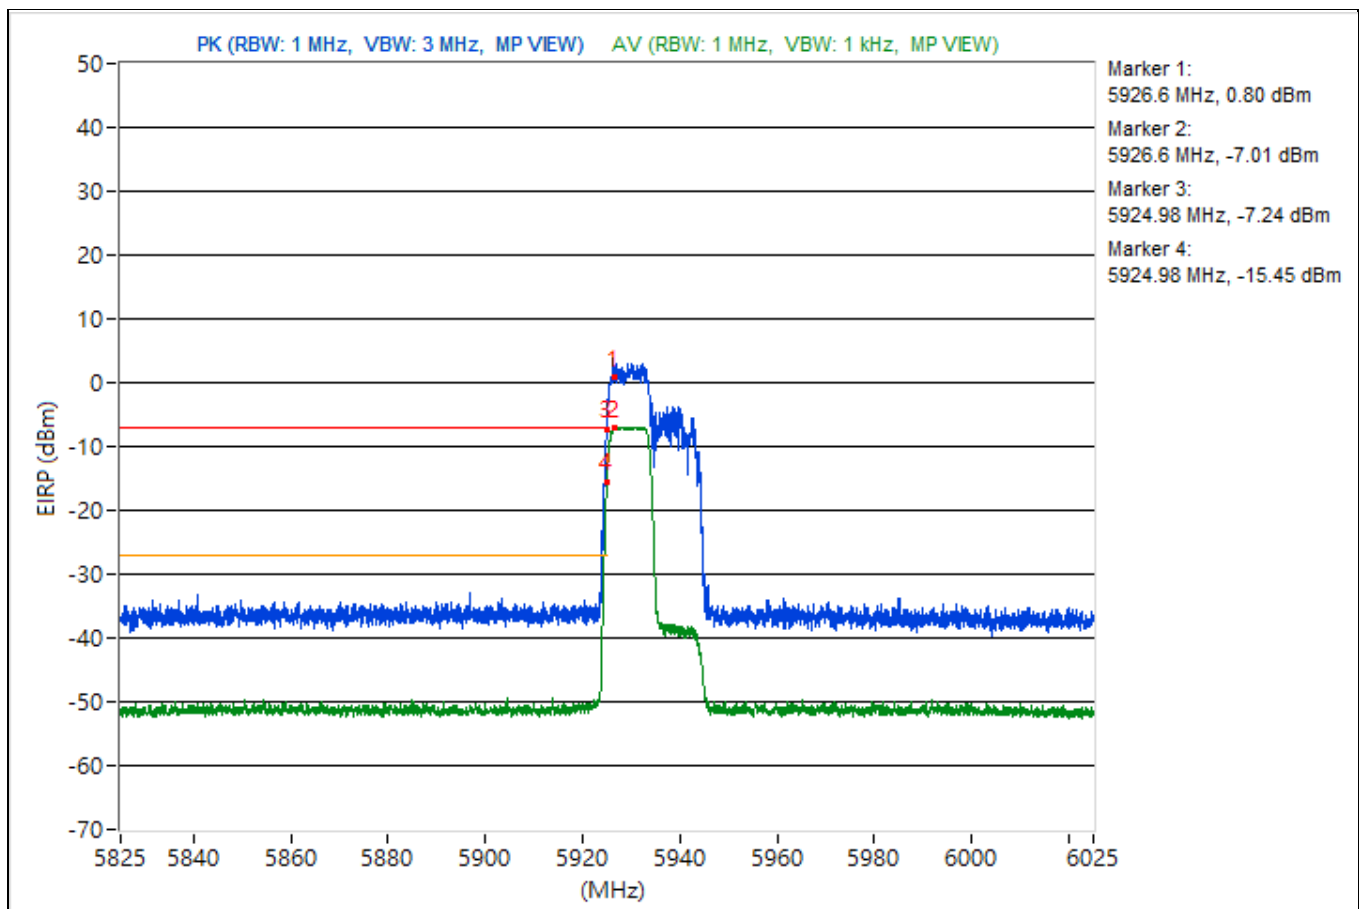


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#5935	57.61 AV	68.2	-10.59	-45.19	-45.67	4.76	-37.65

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

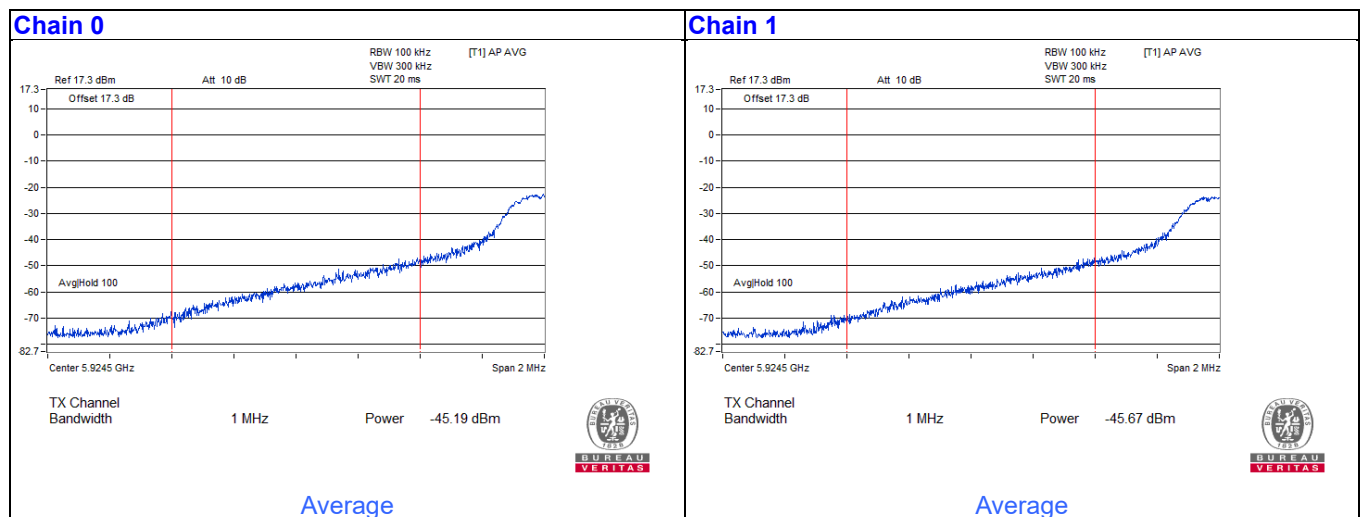


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.82	107.96 PK			4.68	5.15	4.76	12.7
2	*5951.82	100.28 AV			-2.4	-3.12	4.76	5.02
3	#5923.73	50.67 PK	88.26	-37.59	-53.17	-51.68	4.76	-44.59
4	#5923.73	40.53 AV	68.26	-27.73	-62.15	-62.87	4.76	-54.73

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

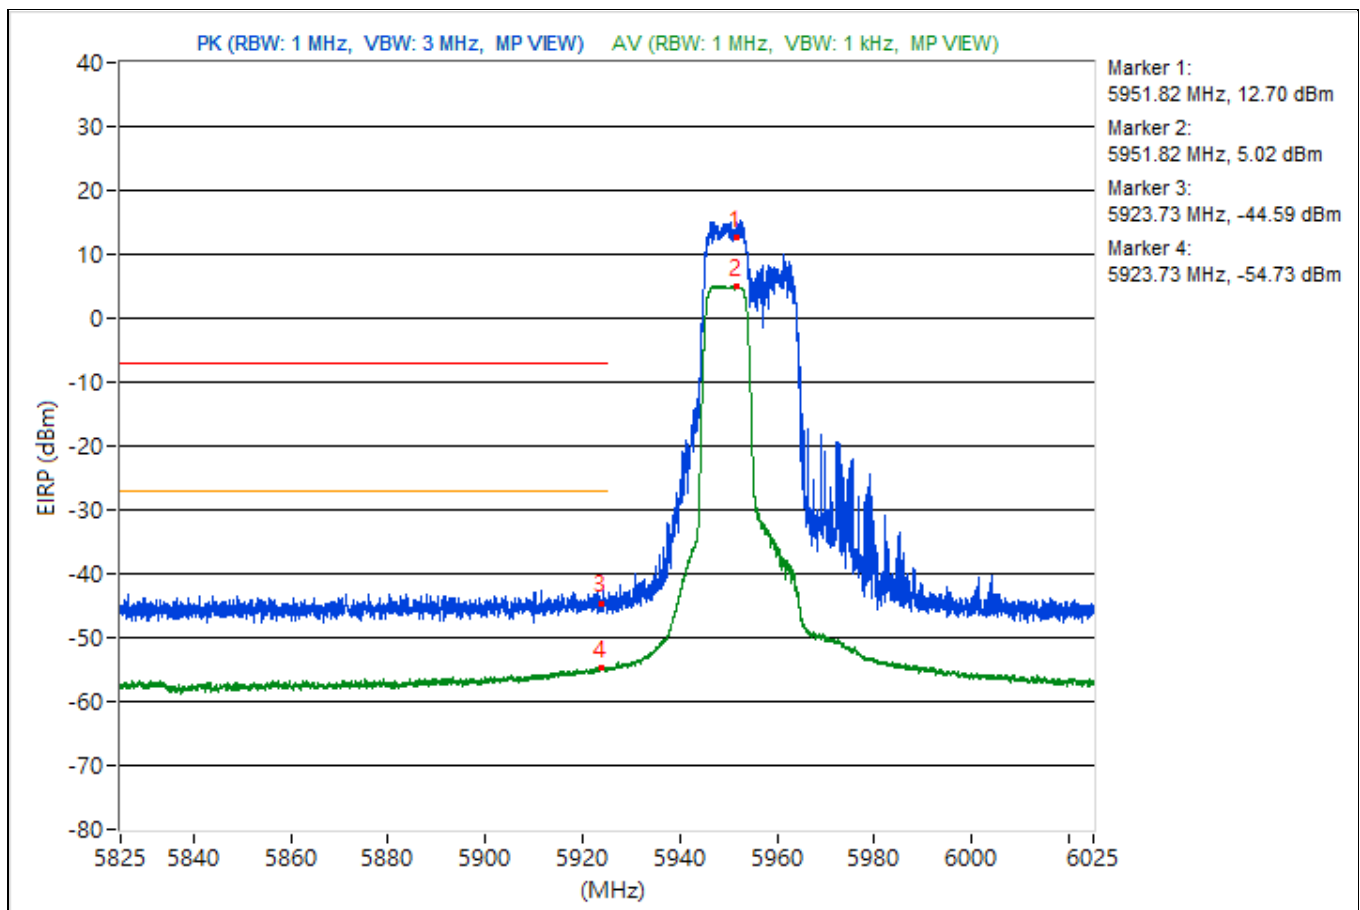


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7122.25	98.54 PK			-4.45	-3.27	4.09	3.28
2	*7122.25	88.75 AV			-13.03	-14.28	4.09	-6.51
3	#7125	88.09 PK	88.26	-0.17	-13.8	-14.78	4.09	-7.17
4	!#7125	79.62 AV	68.26	11.36	-22.19	-23.38	4.09	-15.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

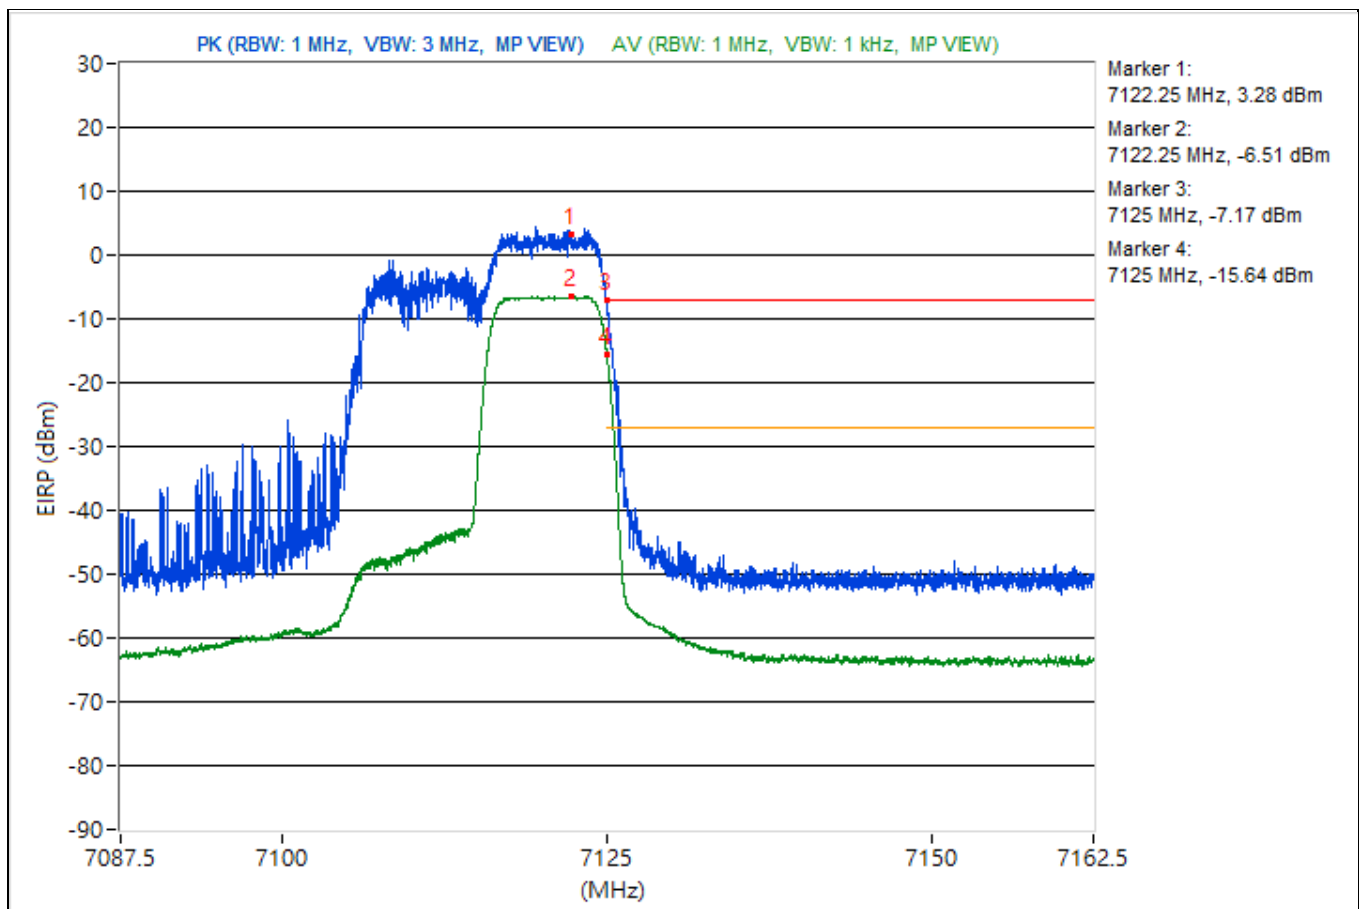


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	55.54 AV	68.2	-12.66	-46.25	-47.48	4.09	-39.72

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

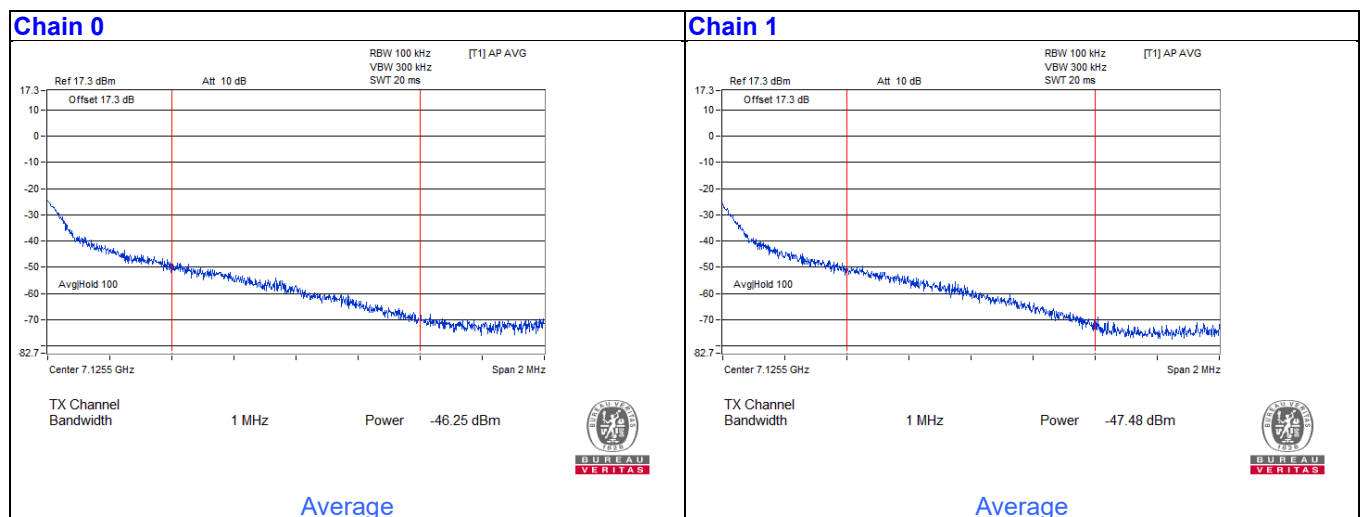


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5931.48	99.94 PK			-3.33	-2.86	4.76	4.68
2	*5931.48	91.07 AV			-12.35	-11.6	4.76	-4.19
3	#5924.98	76.46 PK	88.26	-11.8	-26.82	-26.34	4.76	-18.8
4	#5924.98	45.6 AV	68.26	-22.66	-57.44	-57.42	4.76	-49.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

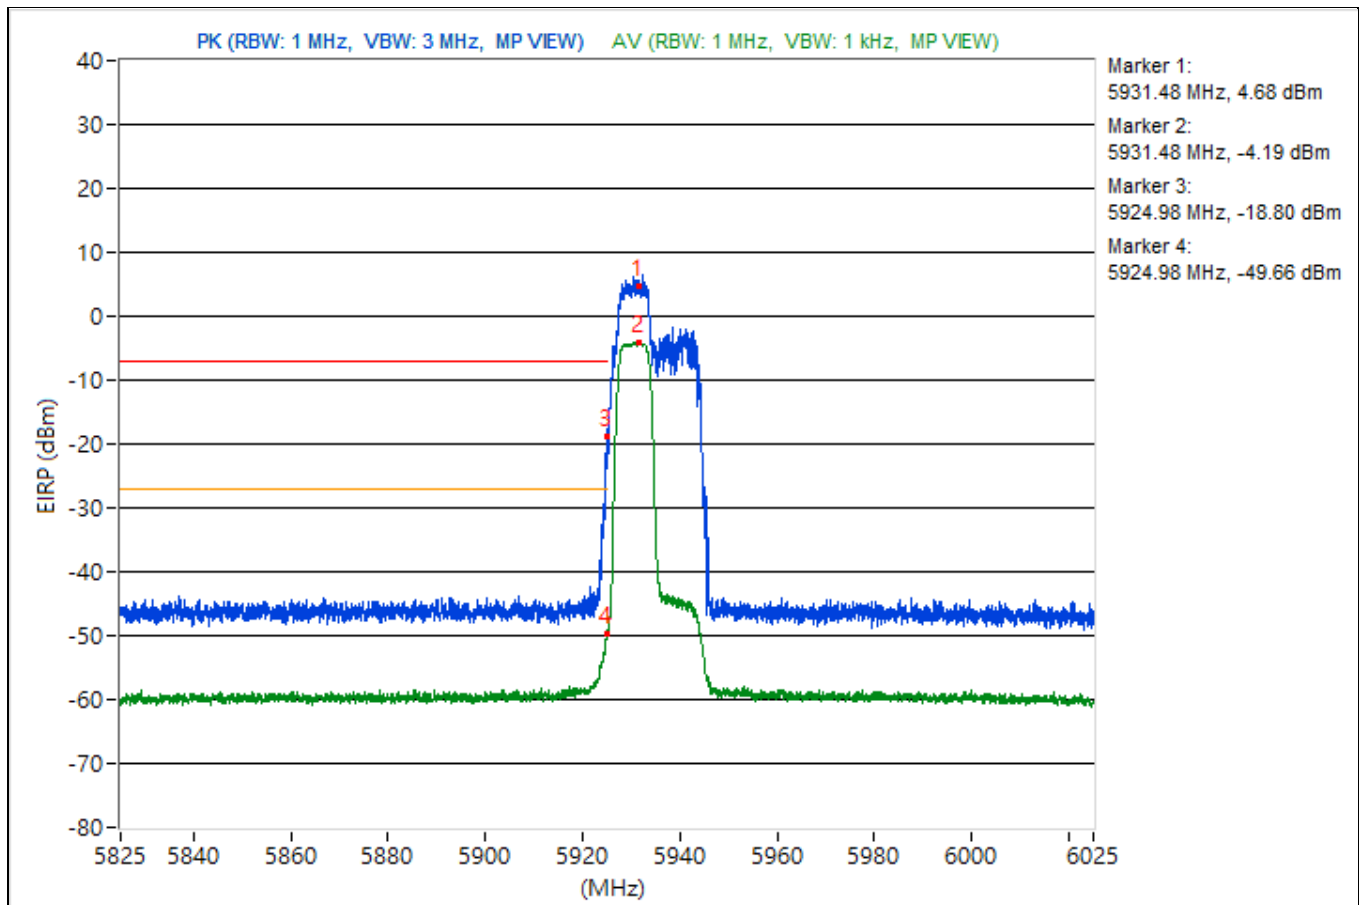


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.07	99.49 PK			-2.94	-4.24	4.76	4.23
2	*5951.07	90.24 AV			-12.43	-13.19	4.76	-5.02
3	#5916.35	49.5 PK	88.26	-38.76	-53.11	-54	4.76	-45.76
4	#5916.35	36.78 AV	68.26	-31.48	-67.14	-65.52	4.76	-58.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

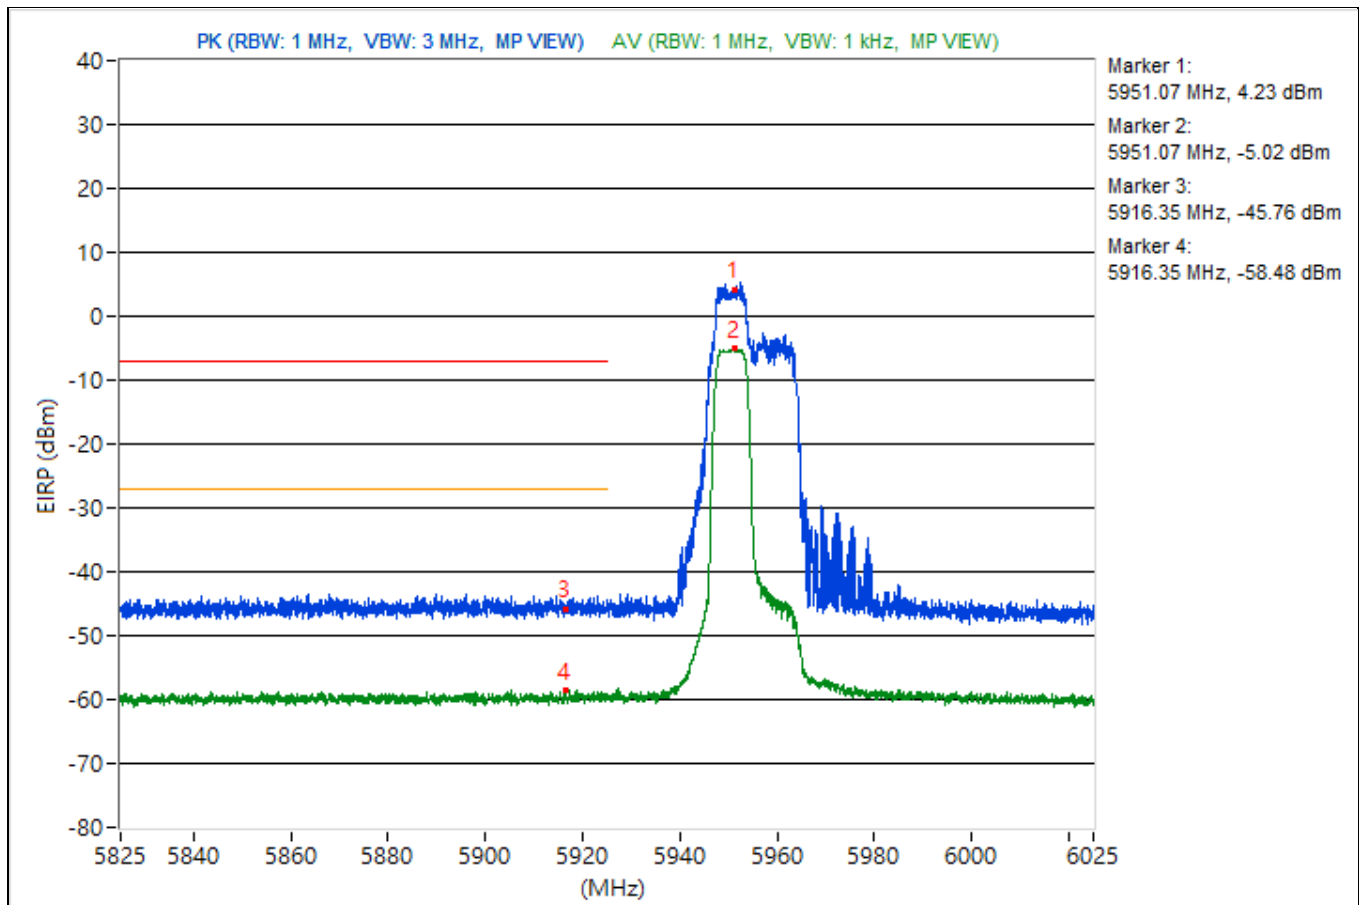


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7118.41	99.39 PK			-2.45	-3.56	4.09	4.13
2	*7118.41	90.07 AV			-11.59	-13.13	4.09	-5.19
3	#7125.03	74.24 PK	88.26	-14.02	-26.7	-30.25	4.09	-21.02
4	#7125.03	41.29 AV	68.26	-26.97	-60.5	-61.72	4.09	-53.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

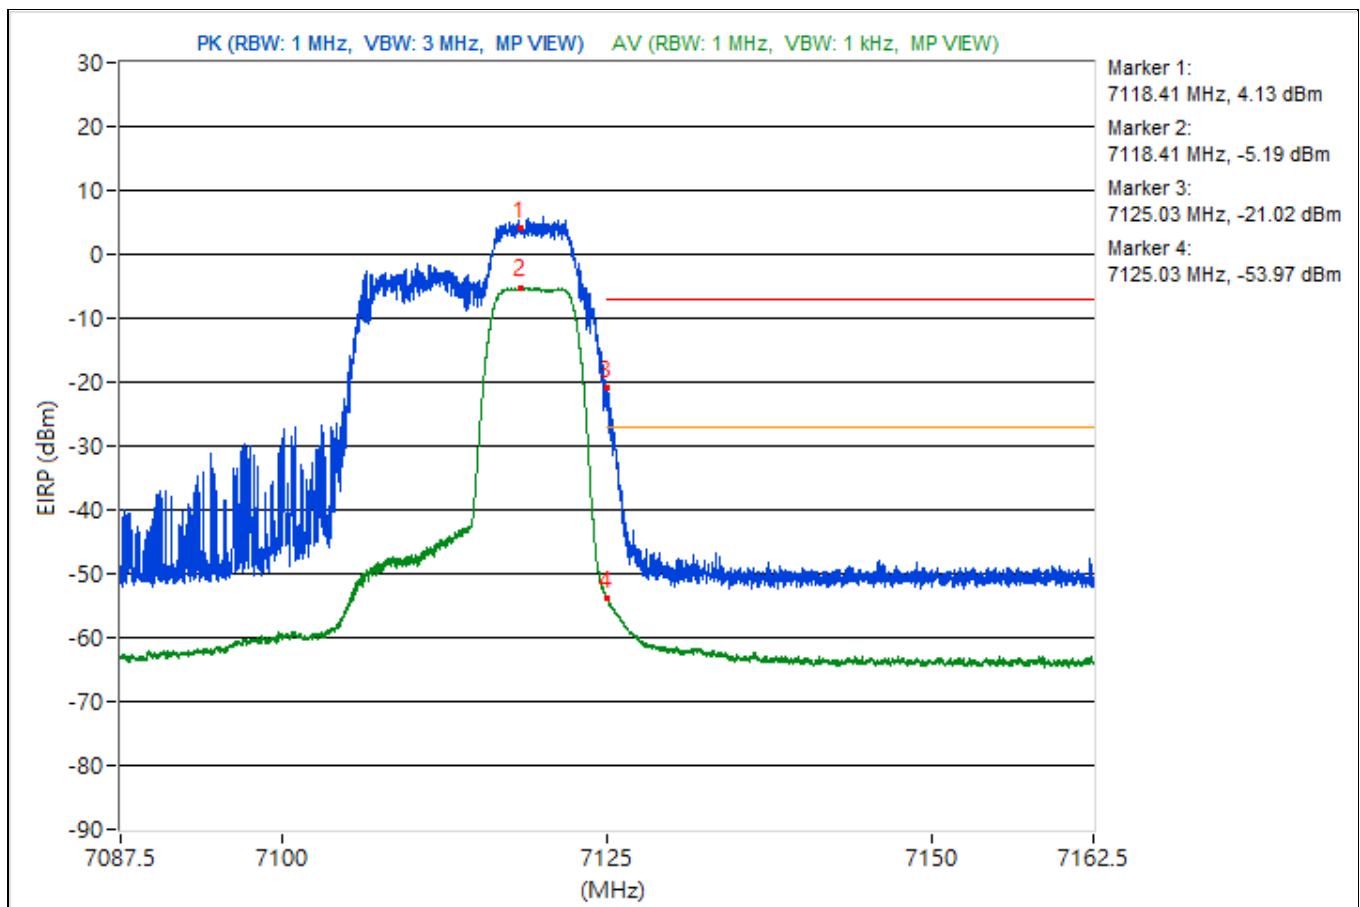


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.75	99.75 PK			-2.01	-5.06	4.76	4.49
2	*5933.75	91.36 AV			-11.13	-12.29	4.76	-3.9
3	#5924.98	87.9 PK	88.26	-0.36	-15.29	-14.98	4.76	-7.36
4	!#5924.98	79.3 AV	68.26	11.04	-23.39	-24.11	4.76	-15.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

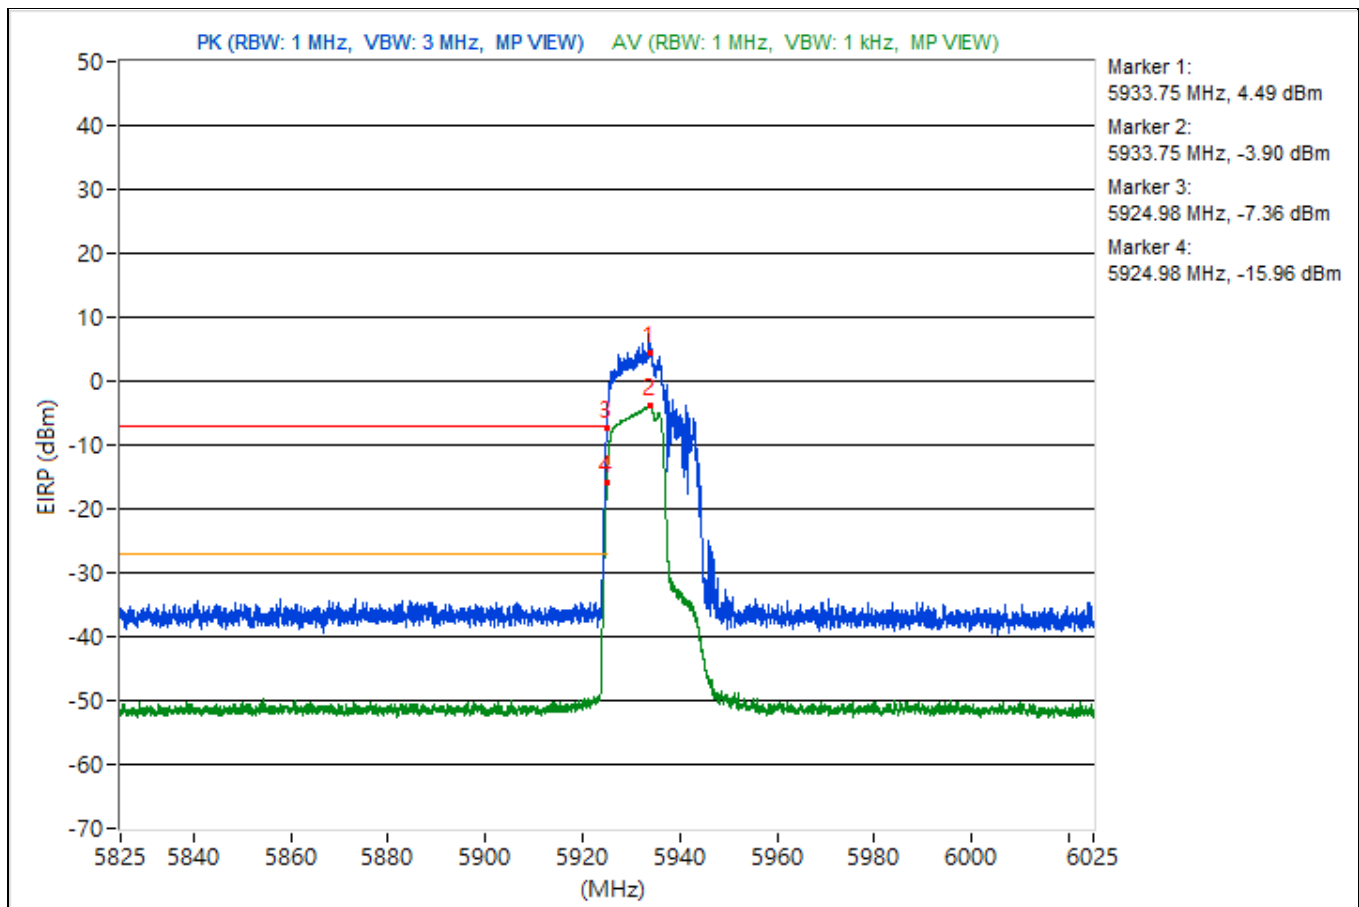


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	47.68 AV	68.2	-20.52	-54.79	-56	4.76	-47.58

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

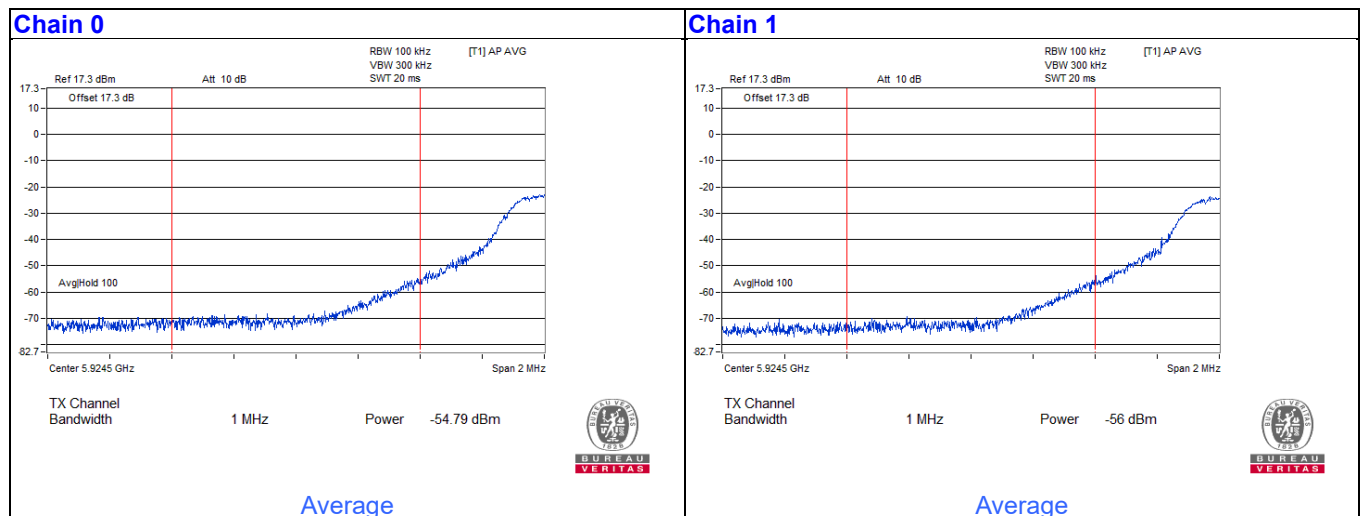


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.85	98.95 PK			-4.12	-4.04	4.76	3.69
2	*5953.85	90.94 AV			-11.8	-12.4	4.76	-4.32
3	#5829.4	48.42 PK	88.26	-39.84	-54.31	-54.94	4.76	-46.84
4	#5829.4	36.26 AV	68.26	-32	-67.9	-65.87	4.76	-59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

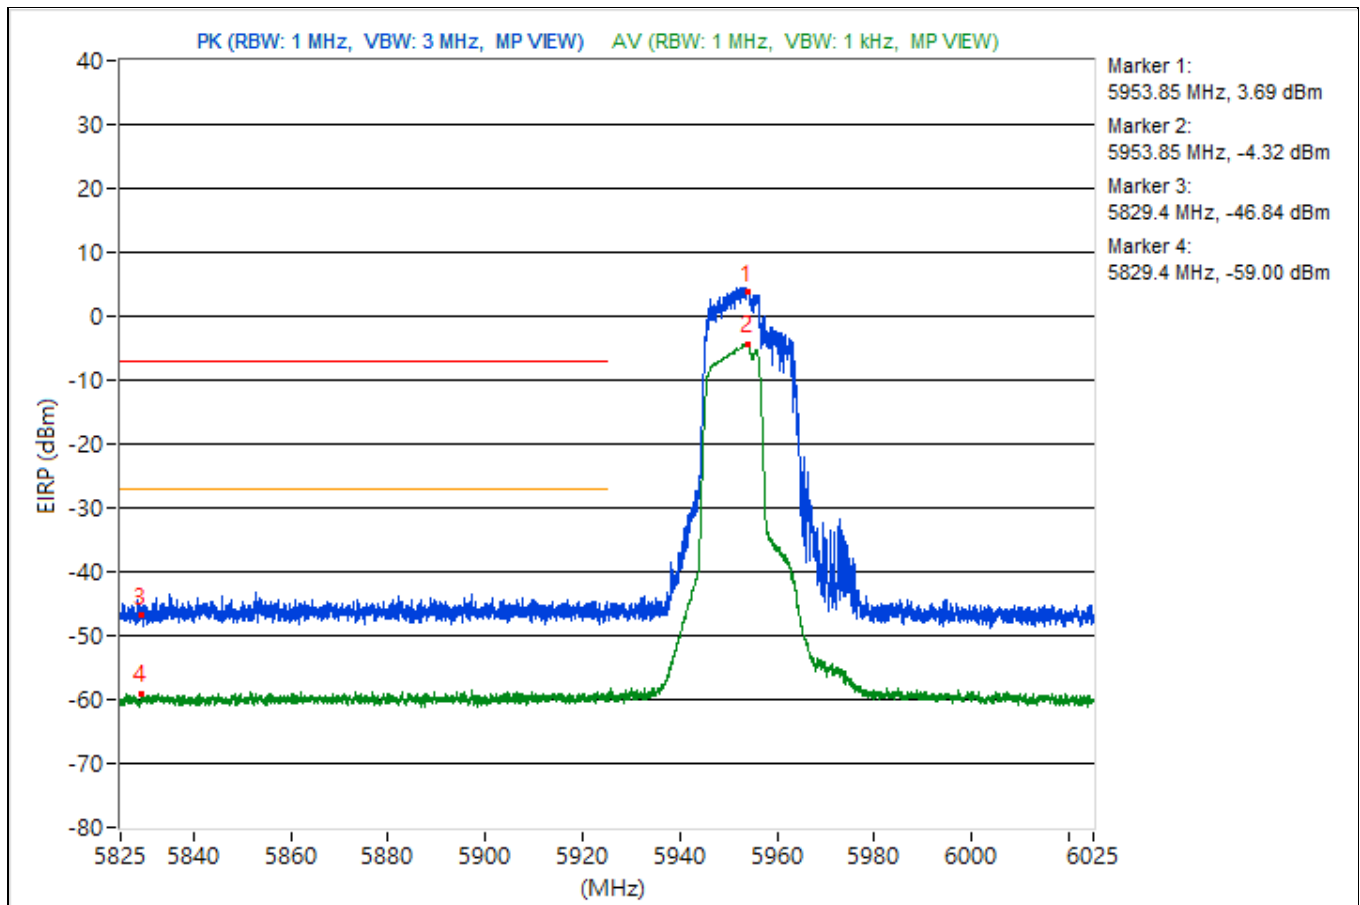


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.1	100.78 PK			-1.32	-1.86	4.09	5.52
2	*7116.1	92.77 AV			-9.22	-9.99	4.09	-2.49
3	#7125	87.44 PK	88.26	-0.82	-14.14	-15.87	4.09	-7.82
4	!#7125	80.04 AV	68.26	11.78	-21.7	-23.05	4.09	-15.22

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

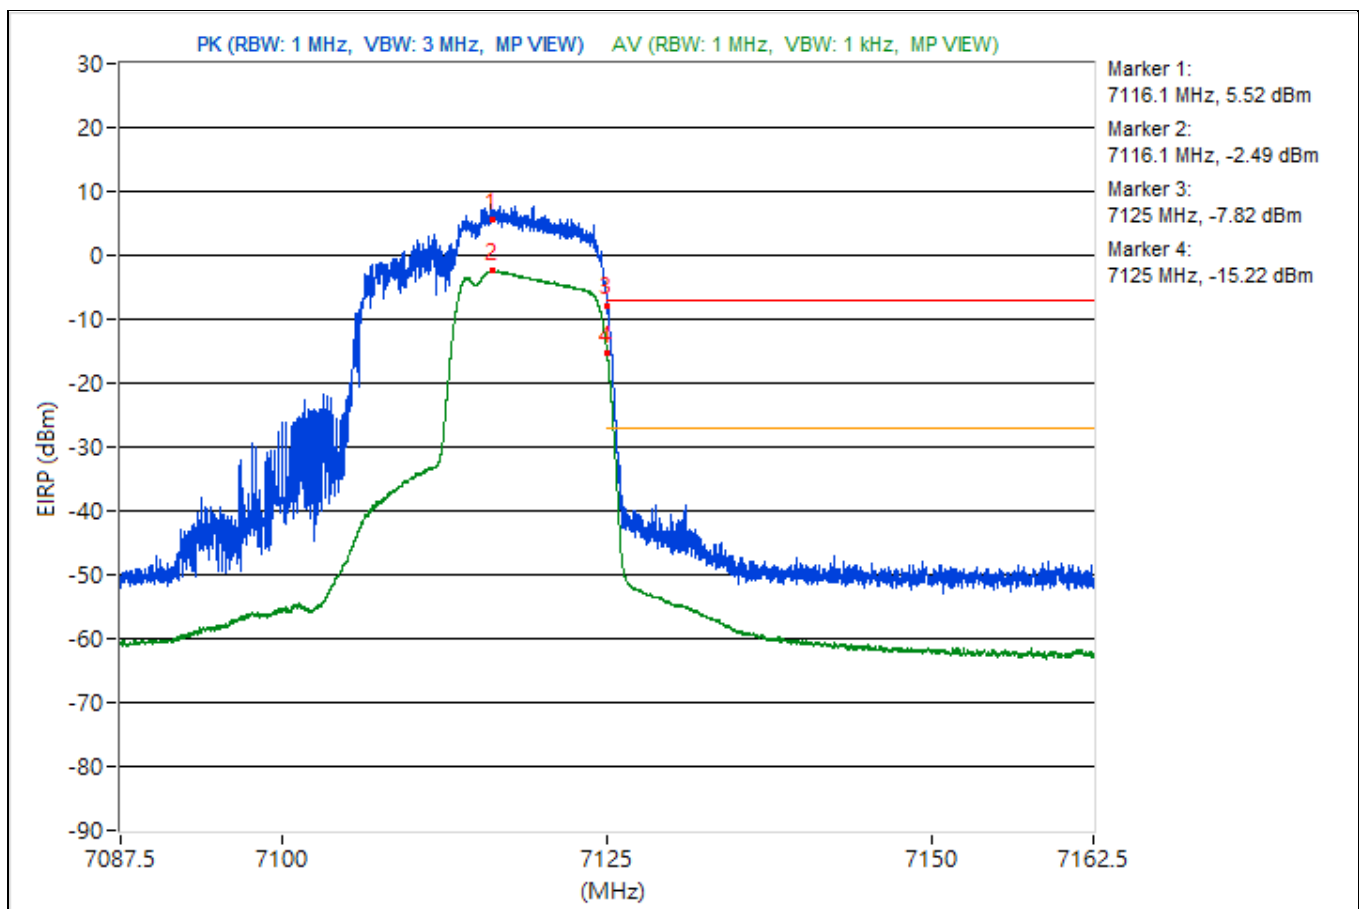


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	#7125	47.4 AV	68.2	-20.8	-53.93	-56.32	4.09	-47.86

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

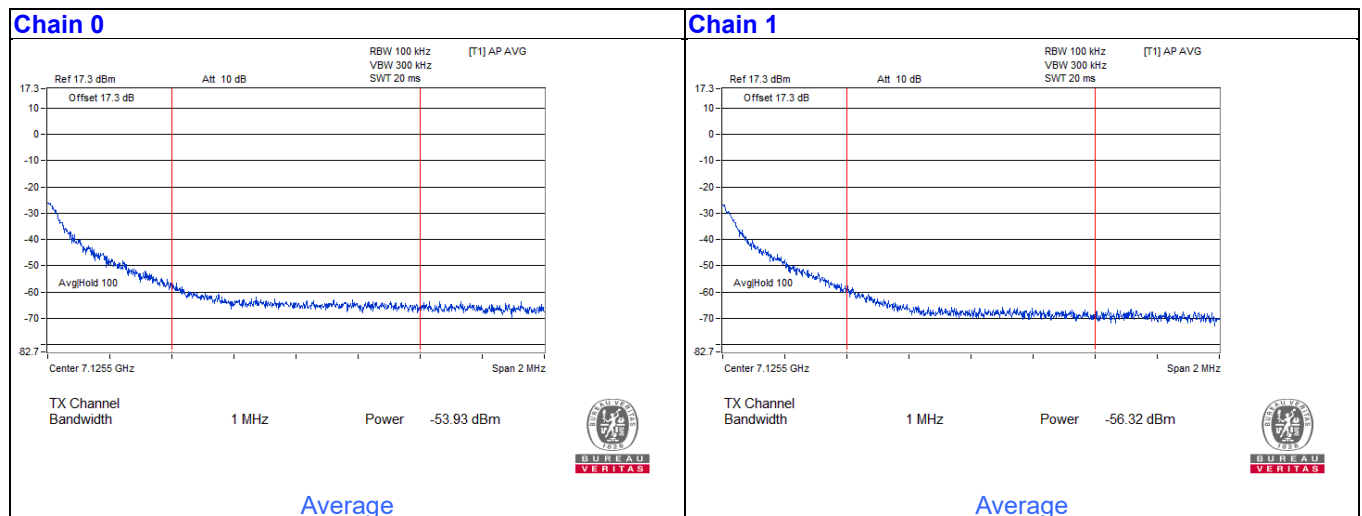


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.52	97.99 PK			-5.28	-4.81	4.76	2.73
2	*5982.52	89.56 AV			-13.83	-13.14	4.76	-5.7
3	#5924.52	52.62 PK	88.26	-35.64	-51.75	-49.39	4.76	-42.64
4	#5924.52	42.25 AV	68.26	-26.01	-61.17	-60.42	4.76	-53.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

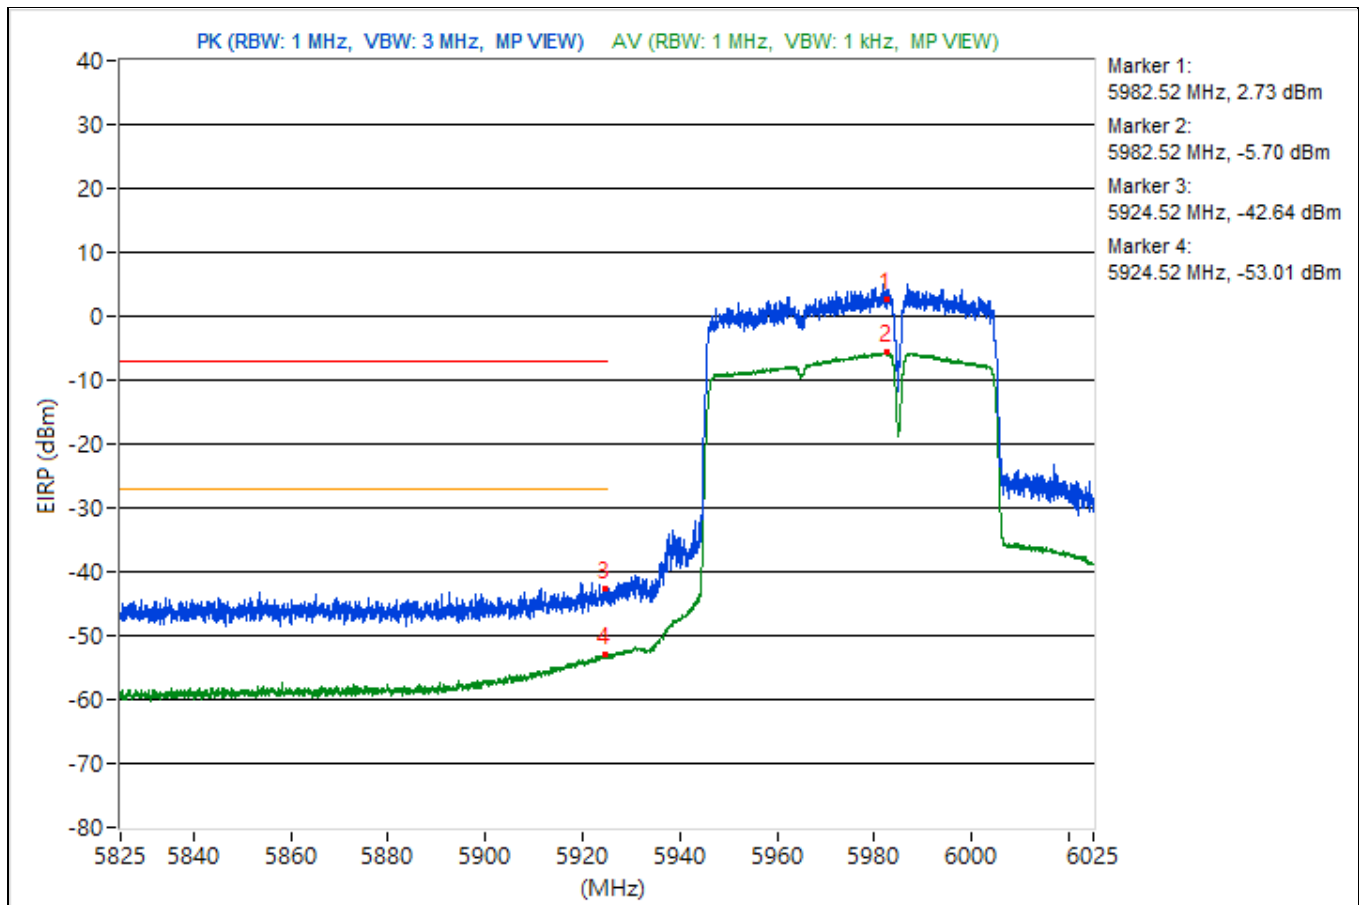


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	6.975 GHz ~ 7.275 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7022.02	100.61 PK			-1.19	-2.39	4.09	5.35
2	*7022.02	91.83 AV			-10.3	-10.77	4.09	-3.43
3	#7125.41	45.71 PK	88.26	-42.55	-57.52	-55.93	4.09	-49.55
4	#7125.41	36.37 AV	68.26	-31.89	-66.38	-65.64	4.09	-58.89

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

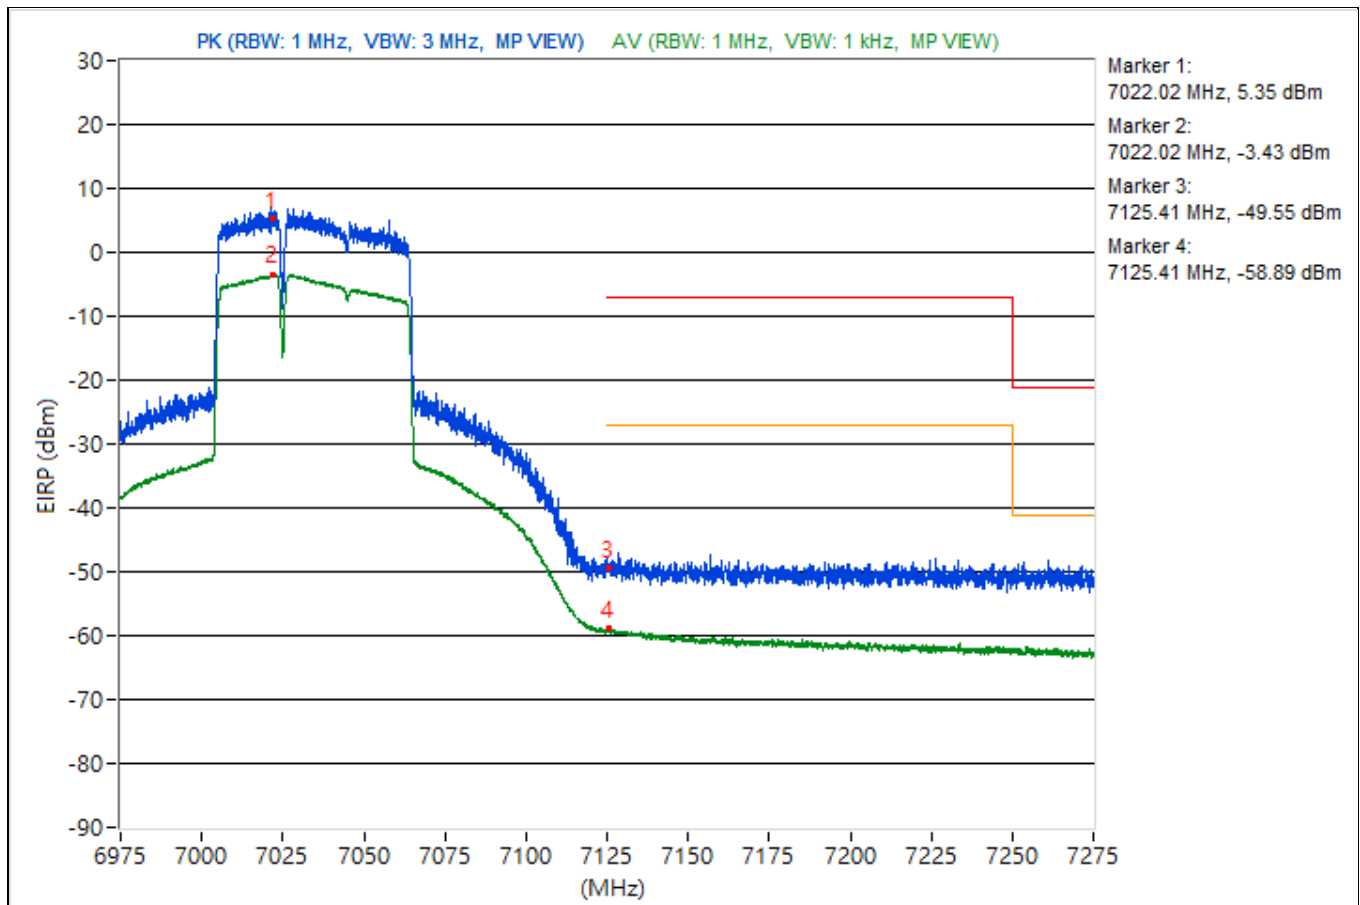


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6030.95	97.08 PK			-7.53	-4.8	4.76	1.82
2	*6030.95	86.95 AV			-16.45	-15.74	4.76	-8.31
3	#5921.05	53.11 PK	88.26	-35.15	-51.86	-48.58	4.76	-42.15
4	#5921.05	43.9 AV	68.26	-24.36	-59.34	-58.92	4.76	-51.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

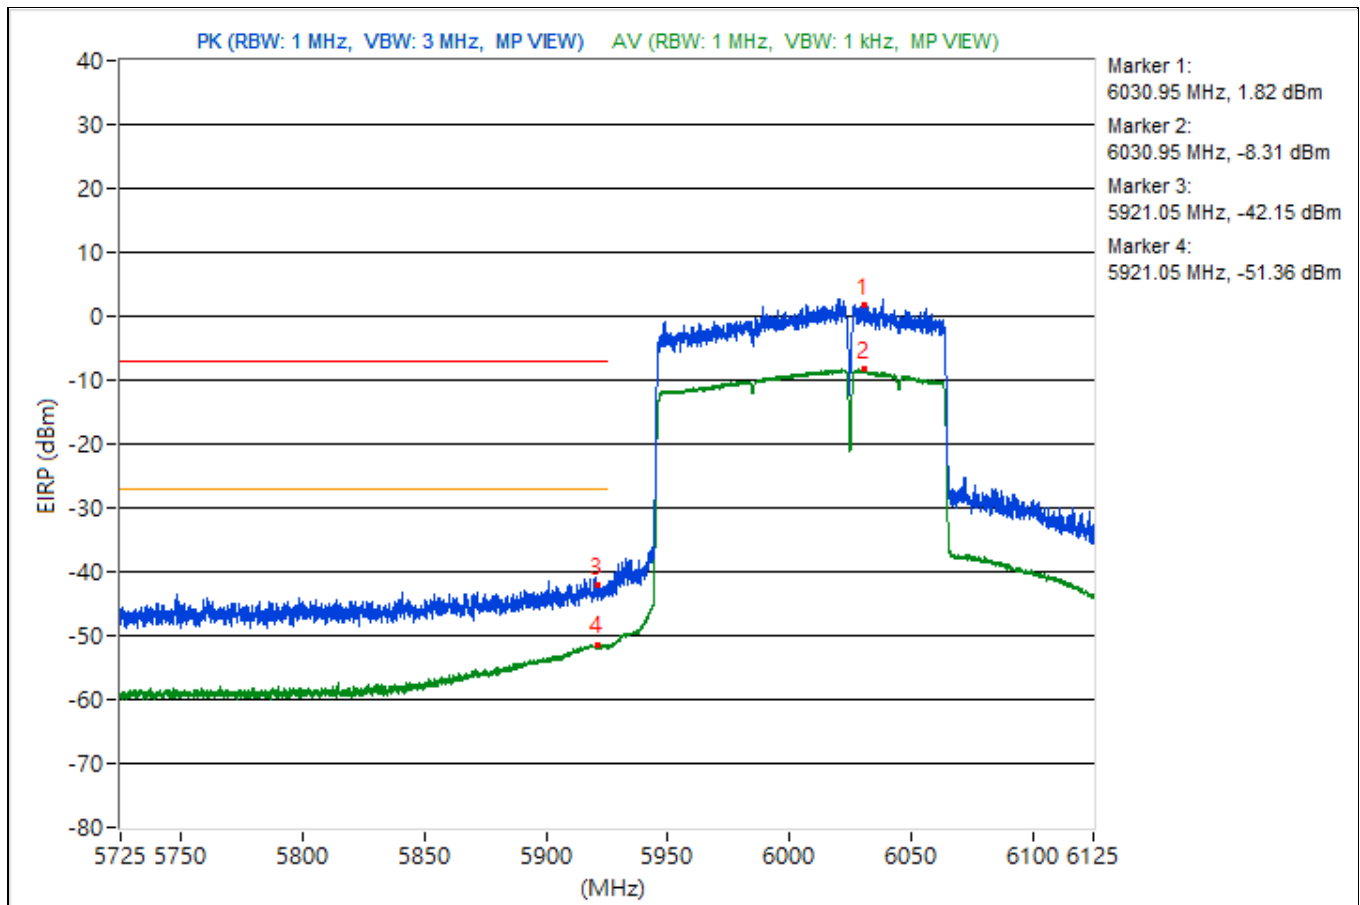


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6987.94	96.16 PK			-6.09	-6.33	4.09	0.9
2	*6987.94	88.17 AV			-13.82	-14.6	4.09	-7.09
3	#7125.19	57.72 PK	88.26	-30.54	-43.32	-46.55	4.09	-37.54
4	#7125.19	48.51 AV	68.26	-19.75	-53.34	-54.42	4.09	-46.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

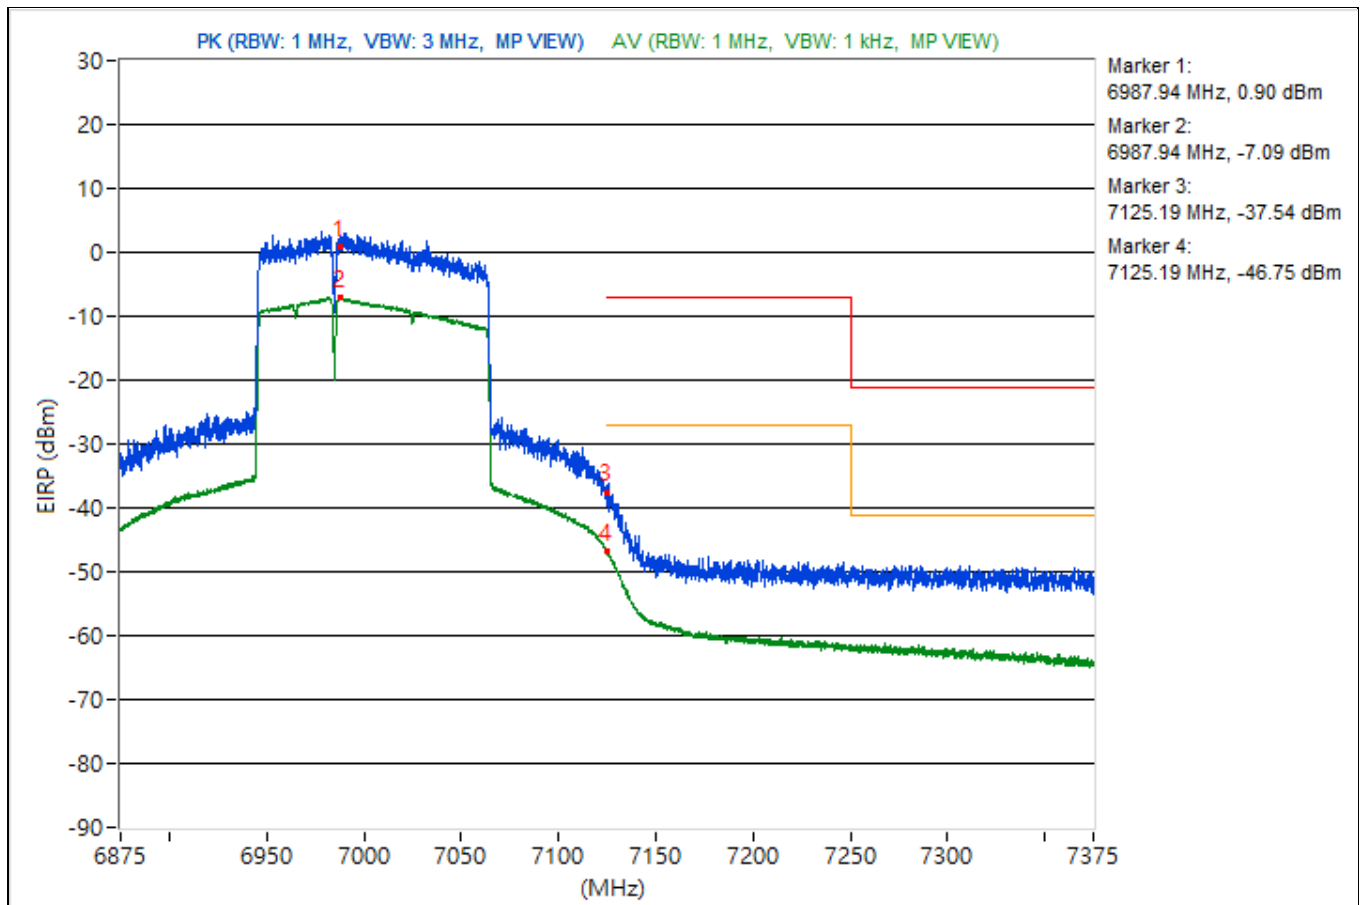


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6019.7	96.12 PK			-7.67	-6.27	4.76	0.86
2	*6019.7	87.65 AV			-15.73	-15.05	4.76	-7.61
3	#5924.4	55.04 PK	88.26	-33.22	-47.61	-48.41	4.76	-40.22
4	#5924.4	47.99 AV	68.26	-20.27	-55.48	-54.64	4.76	-47.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

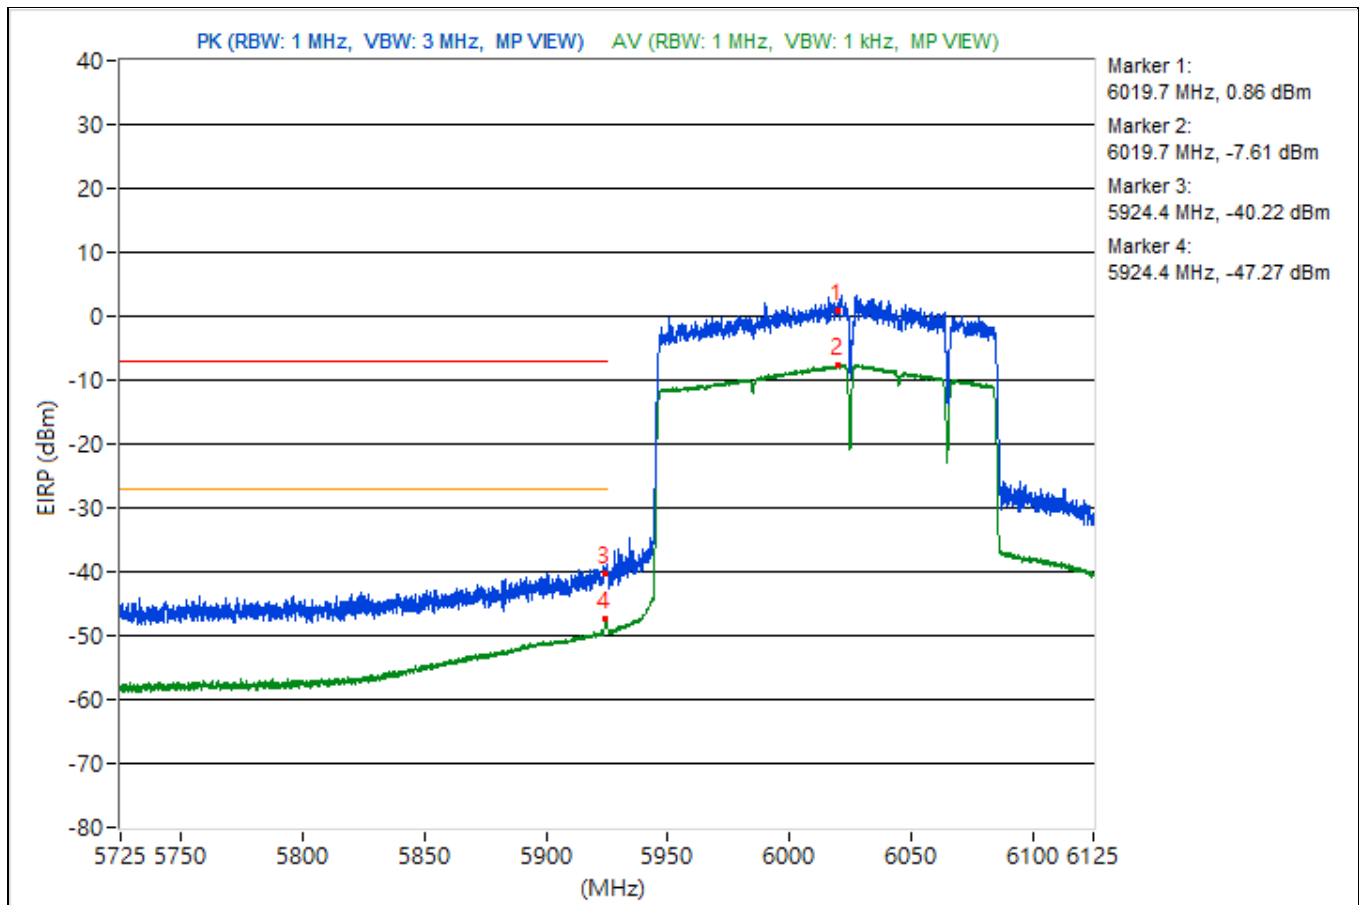


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6982.25	96.27 PK			-5.58	-6.68	4.09	1.01
2	*6982.25	87.5 AV			-14.47	-15.29	4.09	-7.76
3	#7125.5	57.82 PK	88.26	-30.44	-43.9	-45.29	4.09	-37.44
4	#7125.5	48.84 AV	68.26	-19.42	-53	-54.11	4.09	-46.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

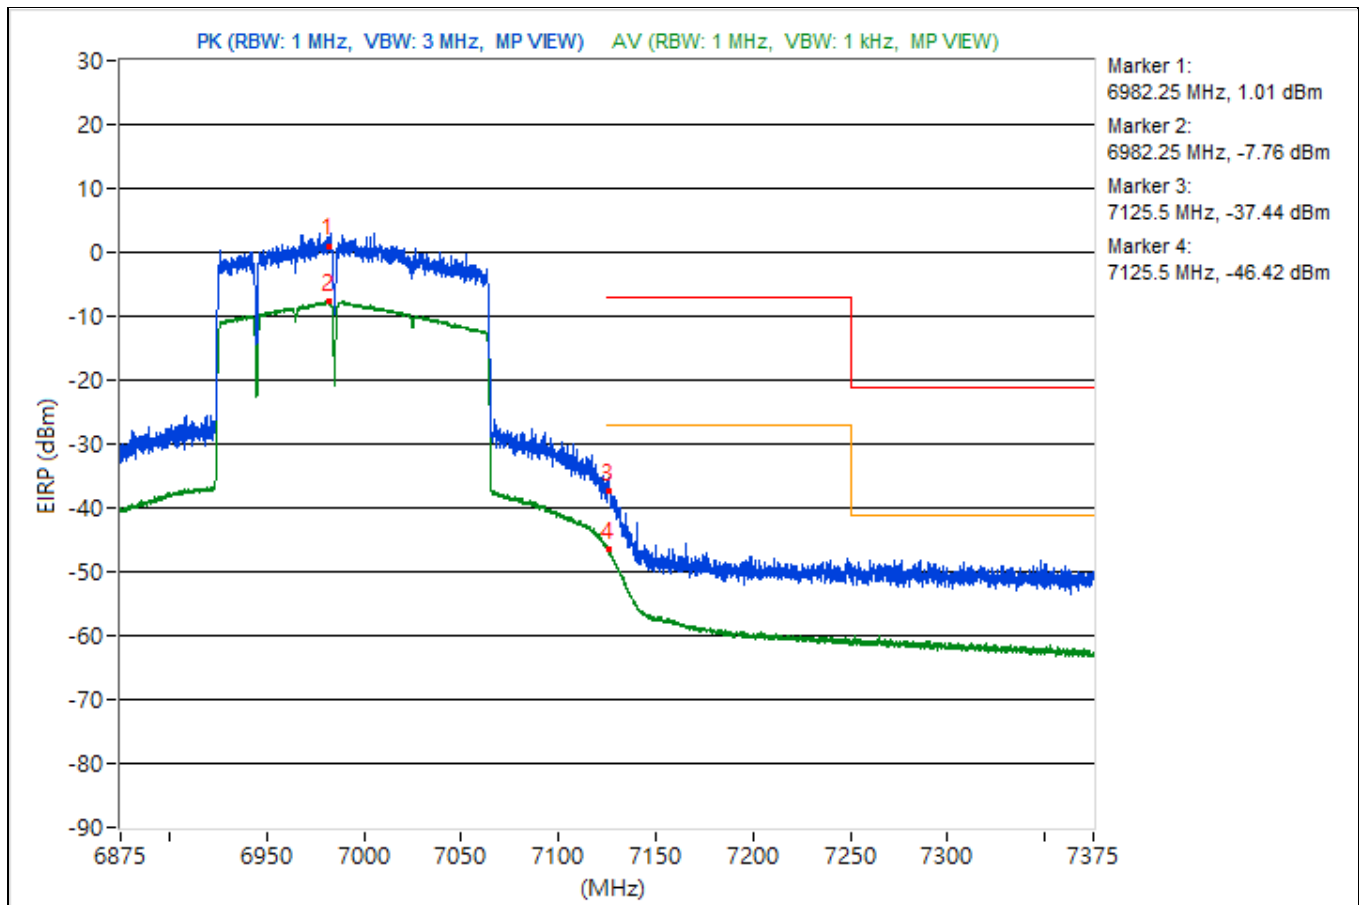

Mode B

1TX

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.7 PK	74.0	-27.3	2.17 H	209	35.1	11.6
2	11870.00	36.1 AV	54.0	-17.9	2.17 H	209	24.5	11.6
3	17805.00	54.3 PK	74.0	-19.7	3.20 H	149	32.5	21.8
4	17805.00	42.2 AV	54.0	-11.8	3.20 H	149	20.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.9 PK	74.0	-26.1	2.19 V	102	36.3	11.6
2	11870.00	36.8 AV	54.0	-17.2	2.19 V	102	25.2	11.6
3	17805.00	53.9 PK	74.0	-20.1	1.89 V	308	32.1	21.8
4	17805.00	41.1 AV	54.0	-12.9	1.89 V	308	19.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.3 PK	74.0	-27.7	2.14 H	222	34.8	11.5
2	11910.00	35.7 AV	54.0	-18.3	2.14 H	222	24.2	11.5
3	17865.00	53.9 PK	74.0	-20.1	3.14 H	147	30.7	23.2
4	17865.00	42.1 AV	54.0	-11.9	3.14 H	147	18.9	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.0 PK	74.0	-26.0	2.15 V	112	36.5	11.5
2	11910.00	36.8 AV	54.0	-17.2	2.15 V	112	25.3	11.5
3	17865.00	54.0 PK	74.0	-20.0	1.89 V	305	30.8	23.2
4	17865.00	41.0 AV	54.0	-13.0	1.89 V	305	17.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	45.9 PK	74.0	-28.1	2.11 H	207	33.8	12.1
2	12350.00	35.2 AV	54.0	-18.8	2.11 H	207	23.1	12.1
3	18525.00	54.4 PK	74.0	-19.6	3.15 H	154	59.4	-5.0
4	18525.00	42.4 AV	54.0	-11.6	3.15 H	154	47.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.5 PK	74.0	-26.5	2.17 V	97	35.4	12.1
2	12350.00	36.3 AV	54.0	-17.7	2.17 V	97	24.2	12.1
3	18525.00	54.2 PK	74.0	-19.8	1.87 V	316	59.2	-5.0
4	18525.00	41.2 AV	54.0	-12.8	1.87 V	316	46.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.9 PK	88.2	-42.3	2.09 H	229	34.0	11.9
2	#12830.00	35.3 AV	68.2	-32.9	2.09 H	229	23.4	11.9
3	19245.00	53.9 PK	74.0	-20.1	3.18 H	156	57.7	-3.8
4	19245.00	41.9 AV	54.0	-12.1	3.18 H	156	45.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.3 PK	88.2	-40.9	2.18 V	122	35.4	11.9
2	#12830.00	36.3 AV	68.2	-31.9	2.18 V	122	24.4	11.9
3	19245.00	53.8 PK	74.0	-20.2	1.84 V	313	57.6	-3.8
4	19245.00	40.8 AV	54.0	-13.2	1.84 V	313	44.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.9 PK	88.2	-42.3	2.13 H	236	33.8	12.1
2	#12870.00	35.4 AV	68.2	-32.8	2.13 H	236	23.3	12.1
3	19305.00	53.2 PK	74.0	-20.8	3.13 H	148	56.9	-3.7
4	19305.00	41.7 AV	54.0	-12.3	3.13 H	148	45.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.8 PK	88.2	-40.4	2.15 V	109	35.7	12.1
2	#12870.00	36.9 AV	68.2	-31.3	2.15 V	109	24.8	12.1
3	19305.00	54.2 PK	74.0	-19.8	1.84 V	320	57.9	-3.7
4	19305.00	41.3 AV	54.0	-12.7	1.84 V	320	45.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.3 PK	88.2	-41.9	2.15 H	224	34.2	12.1
2	#12950.00	35.6 AV	68.2	-32.6	2.15 H	224	23.5	12.1
3	19425.00	53.7 PK	74.0	-20.3	3.15 H	137	57.5	-3.8
4	19425.00	41.8 AV	54.0	-12.2	3.15 H	137	45.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.2 PK	88.2	-40.0	2.12 V	107	36.1	12.1
2	#12950.00	36.7 AV	68.2	-31.5	2.12 V	107	24.6	12.1
3	19425.00	54.1 PK	74.0	-19.9	1.92 V	298	57.9	-3.8
4	19425.00	41.2 AV	54.0	-12.8	1.92 V	298	45.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.5 PK	88.2	-41.7	2.19 H	208	34.4	12.1
2	#13030.00	36.0 AV	68.2	-32.2	2.19 H	208	23.9	12.1
3	19545.00	54.3 PK	74.0	-19.7	3.09 H	140	58.4	-4.1
4	19545.00	42.5 AV	54.0	-11.5	3.09 H	140	46.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.4 PK	88.2	-39.8	2.18 V	107	36.3	12.1
2	#13030.00	36.8 AV	68.2	-31.4	2.18 V	107	24.7	12.1
3	19545.00	53.8 PK	74.0	-20.2	1.87 V	295	57.9	-4.1
4	19545.00	40.9 AV	54.0	-13.1	1.87 V	295	45.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.0 PK	88.2	-42.2	2.11 H	236	33.6	12.4
2	#13070.00	35.5 AV	68.2	-32.7	2.11 H	236	23.1	12.4
3	19605.00	53.9 PK	74.0	-20.1	3.19 H	152	57.9	-4.0
4	19605.00	42.2 AV	54.0	-11.8	3.19 H	152	46.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.0 PK	88.2	-40.2	2.16 V	112	35.6	12.4
2	#13070.00	36.8 AV	68.2	-31.4	2.16 V	112	24.4	12.4
3	19605.00	54.3 PK	74.0	-19.7	1.97 V	292	58.3	-4.0
4	19605.00	41.2 AV	54.0	-12.8	1.97 V	292	45.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.2 PK	74.0	-27.8	2.16 H	232	33.0	13.2
2	13390.00	35.5 AV	54.0	-18.5	2.16 H	232	22.3	13.2
3	20085.00	54.5 PK	74.0	-19.5	3.14 H	162	58.0	-3.5
4	20085.00	42.5 AV	54.0	-11.5	3.14 H	162	46.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.8 PK	74.0	-26.2	2.14 V	97	34.6	13.2
2	13390.00	36.4 AV	54.0	-17.6	2.14 V	97	23.2	13.2
3	20085.00	53.9 PK	74.0	-20.1	1.82 V	295	57.4	-3.5
4	20085.00	41.2 AV	54.0	-12.8	1.82 V	295	44.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.0 PK	88.2	-42.2	2.17 H	216	31.9	14.1
2	#13710.00	35.2 AV	68.2	-33.0	2.17 H	216	21.1	14.1
3	20565.00	54.0 PK	74.0	-20.0	3.19 H	156	57.3	-3.3
4	20565.00	41.9 AV	54.0	-12.1	3.19 H	156	45.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.4 PK	88.2	-39.8	2.20 V	115	34.3	14.1
2	#13710.00	36.7 AV	68.2	-31.5	2.20 V	115	22.6	14.1
3	20565.00	53.6 PK	74.0	-20.4	1.92 V	294	56.9	-3.3
4	20565.00	40.6 AV	54.0	-13.4	1.92 V	294	43.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.1 PK	88.2	-42.1	2.11 H	236	32.1	14.0
2	#13750.00	35.3 AV	68.2	-32.9	2.11 H	236	21.3	14.0
3	20625.00	54.2 PK	74.0	-19.8	3.13 H	137	57.5	-3.3
4	20625.00	42.4 AV	54.0	-11.6	3.13 H	137	45.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.3 PK	88.2	-39.9	2.22 V	118	34.3	14.0
2	#13750.00	36.7 AV	68.2	-31.5	2.22 V	118	22.7	14.0
3	20625.00	54.1 PK	74.0	-19.9	1.86 V	284	57.4	-3.3
4	20625.00	41.2 AV	54.0	-12.8	1.86 V	284	44.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.0 PK	88.2	-42.2	2.12 H	219	31.6	14.4
2	#13990.00	35.5 AV	68.2	-32.7	2.12 H	219	21.1	14.4
3	20985.00	54.5 PK	74.0	-19.5	3.16 H	160	57.3	-2.8
4	20985.00	42.5 AV	54.0	-11.5	3.16 H	160	45.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.1 PK	88.2	-40.1	2.20 V	99	33.7	14.4
2	#13990.00	36.7 AV	68.2	-31.5	2.20 V	99	22.3	14.4
3	20985.00	53.4 PK	74.0	-20.6	1.90 V	303	56.2	-2.8
4	20985.00	40.6 AV	54.0	-13.4	1.90 V	303	43.4	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.6 PK	88.2	-41.6	2.14 H	210	32.4	14.2
2	#14230.00	36.0 AV	68.2	-32.2	2.14 H	210	21.8	14.2
3	21345.00	53.7 PK	74.0	-20.3	3.09 H	162	55.3	-1.6
4	21345.00	41.7 AV	54.0	-12.3	3.09 H	162	43.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.3 PK	88.2	-39.9	2.23 V	92	34.1	14.2
2	#14230.00	36.8 AV	68.2	-31.4	2.23 V	92	22.6	14.2
3	21345.00	53.2 PK	74.0	-20.8	1.85 V	287	54.8	-1.6
4	21345.00	40.6 AV	54.0	-13.4	1.85 V	287	42.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.1 PK	74.0	-27.9	2.16 H	235	34.5	11.6
2	11870.00	35.6 AV	54.0	-18.4	2.16 H	235	24.0	11.6
3	17805.00	53.6 PK	74.0	-20.4	3.20 H	159	31.8	21.8
4	17805.00	41.5 AV	54.0	-12.5	3.20 H	159	19.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.1 PK	74.0	-24.9	2.24 V	99	37.5	11.6
2	11870.00	37.2 AV	54.0	-16.8	2.24 V	99	25.6	11.6
3	17805.00	53.1 PK	74.0	-20.9	1.84 V	278	31.3	21.8
4	17805.00	40.7 AV	54.0	-13.3	1.84 V	278	18.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.4 PK	74.0	-27.6	2.13 H	229	34.9	11.5
2	11910.00	35.6 AV	54.0	-18.4	2.13 H	229	24.1	11.5
3	17865.00	53.5 PK	74.0	-20.5	3.18 H	154	30.3	23.2
4	17865.00	41.6 AV	54.0	-12.4	3.18 H	154	18.4	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	2.18 V	108	37.2	11.5
2	11910.00	36.9 AV	54.0	-17.1	2.18 V	108	25.4	11.5
3	17865.00	53.6 PK	74.0	-20.4	1.90 V	288	30.4	23.2
4	17865.00	41.0 AV	54.0	-13.0	1.90 V	288	17.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.1 PK	74.0	-27.9	2.14 H	235	34.0	12.1
2	12350.00	35.3 AV	54.0	-18.7	2.14 H	235	23.2	12.1
3	18525.00	53.9 PK	74.0	-20.1	3.09 H	154	58.9	-5.0
4	18525.00	41.9 AV	54.0	-12.1	3.09 H	154	46.9	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.6 PK	74.0	-25.4	2.14 V	95	36.5	12.1
2	12350.00	37.0 AV	54.0	-17.0	2.14 V	95	24.9	12.1
3	18525.00	54.1 PK	74.0	-19.9	1.89 V	298	59.1	-5.0
4	18525.00	41.4 AV	54.0	-12.6	1.89 V	298	46.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.8 PK	88.2	-41.4	2.15 H	237	34.9	11.9
2	#12830.00	36.1 AV	68.2	-32.1	2.15 H	237	24.2	11.9
3	19245.00	54.4 PK	74.0	-19.6	3.10 H	159	58.2	-3.8
4	19245.00	42.6 AV	54.0	-11.4	3.10 H	159	46.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.5 PK	88.2	-39.7	2.18 V	106	36.6	11.9
2	#12830.00	36.9 AV	68.2	-31.3	2.18 V	106	25.0	11.9
3	19245.00	53.6 PK	74.0	-20.4	1.92 V	307	57.4	-3.8
4	19245.00	41.0 AV	54.0	-13.0	1.92 V	307	44.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.8 PK	88.2	-42.4	2.20 H	208	33.7	12.1
2	#12870.00	35.3 AV	68.2	-32.9	2.20 H	208	23.2	12.1
3	19305.00	54.5 PK	74.0	-19.5	3.12 H	147	58.2	-3.7
4	19305.00	42.5 AV	54.0	-11.5	3.12 H	147	46.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.9 PK	88.2	-39.3	2.16 V	121	36.8	12.1
2	#12870.00	37.2 AV	68.2	-31.0	2.16 V	121	25.1	12.1
3	19305.00	54.3 PK	74.0	-19.7	1.93 V	287	58.0	-3.7
4	19305.00	41.3 AV	54.0	-12.7	1.93 V	287	45.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.6 PK	88.2	-41.6	2.14 H	209	34.5	12.1
2	#12950.00	36.1 AV	68.2	-32.1	2.14 H	209	24.0	12.1
3	19425.00	53.9 PK	74.0	-20.1	3.15 H	163	57.7	-3.8
4	19425.00	42.2 AV	54.0	-11.8	3.15 H	163	46.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.2 PK	88.2	-40.0	2.20 V	109	36.1	12.1
2	#12950.00	36.8 AV	68.2	-31.4	2.20 V	109	24.7	12.1
3	19425.00	53.7 PK	74.0	-20.3	1.92 V	285	57.5	-3.8
4	19425.00	40.9 AV	54.0	-13.1	1.92 V	285	44.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.8 PK	88.2	-41.4	2.17 H	224	34.7	12.1
2	#13030.00	36.1 AV	68.2	-32.1	2.17 H	224	24.0	12.1
3	19545.00	53.9 PK	74.0	-20.1	3.16 H	157	58.0	-4.1
4	19545.00	42.1 AV	54.0	-11.9	3.16 H	157	46.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.8 PK	88.2	-40.4	2.24 V	113	35.7	12.1
2	#13030.00	36.3 AV	68.2	-31.9	2.24 V	113	24.2	12.1
3	19545.00	53.1 PK	74.0	-20.9	1.92 V	298	57.2	-4.1
4	19545.00	40.4 AV	54.0	-13.6	1.92 V	298	44.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.5 PK	88.2	-41.7	2.15 H	238	34.1	12.4
2	#13070.00	36.0 AV	68.2	-32.2	2.15 H	238	23.6	12.4
3	19605.00	53.8 PK	74.0	-20.2	3.10 H	142	57.8	-4.0
4	19605.00	42.0 AV	54.0	-12.0	3.10 H	142	46.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.1 PK	88.2	-40.1	2.23 V	101	35.7	12.4
2	#13070.00	36.3 AV	68.2	-31.9	2.23 V	101	23.9	12.4
3	19605.00	53.8 PK	74.0	-20.2	1.86 V	300	57.8	-4.0
4	19605.00	41.1 AV	54.0	-12.9	1.86 V	300	45.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.7 PK	74.0	-27.3	2.18 H	217	33.5	13.2
2	13390.00	36.0 AV	54.0	-18.0	2.18 H	217	22.8	13.2
3	20085.00	53.9 PK	74.0	-20.1	3.09 H	154	57.4	-3.5
4	20085.00	42.3 AV	54.0	-11.7	3.09 H	154	45.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.4 PK	74.0	-25.6	2.20 V	108	35.2	13.2
2	13390.00	36.8 AV	54.0	-17.2	2.20 V	108	23.6	13.2
3	20085.00	53.8 PK	74.0	-20.2	1.89 V	296	57.3	-3.5
4	20085.00	40.7 AV	54.0	-13.3	1.89 V	296	44.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.2 PK	88.2	-42.0	2.15 H	223	32.1	14.1
2	#13710.00	35.5 AV	68.2	-32.7	2.15 H	223	21.4	14.1
3	20565.00	53.9 PK	74.0	-20.1	3.15 H	161	57.2	-3.3
4	20565.00	41.8 AV	54.0	-12.2	3.15 H	161	45.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	2.18 V	106	34.5	14.1
2	#13710.00	36.8 AV	68.2	-31.4	2.18 V	106	22.7	14.1
3	20565.00	53.8 PK	74.0	-20.2	1.85 V	288	57.1	-3.3
4	20565.00	41.1 AV	54.0	-12.9	1.85 V	288	44.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.4 PK	88.2	-41.8	2.19 H	221	32.4	14.0
2	#13750.00	35.7 AV	68.2	-32.5	2.19 H	221	21.7	14.0
3	20625.00	54.0 PK	74.0	-20.0	3.09 H	140	57.3	-3.3
4	20625.00	41.9 AV	54.0	-12.1	3.09 H	140	45.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.3 PK	88.2	-39.9	2.16 V	99	34.3	14.0
2	#13750.00	36.7 AV	68.2	-31.5	2.16 V	99	22.7	14.0
3	20625.00	53.9 PK	74.0	-20.1	1.85 V	295	57.2	-3.3
4	20625.00	40.8 AV	54.0	-13.2	1.85 V	295	44.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.9 PK	88.2	-42.3	2.16 H	235	31.5	14.4
2	#13990.00	35.5 AV	68.2	-32.7	2.16 H	235	21.1	14.4
3	20985.00	54.3 PK	74.0	-19.7	3.09 H	157	57.1	-2.8
4	20985.00	42.6 AV	54.0	-11.4	3.09 H	157	45.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.9 PK	88.2	-40.3	2.19 V	122	33.5	14.4
2	#13990.00	36.6 AV	68.2	-31.6	2.19 V	122	22.2	14.4
3	20985.00	54.1 PK	74.0	-19.9	1.91 V	292	56.9	-2.8
4	20985.00	41.4 AV	54.0	-12.6	1.91 V	292	44.2	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.2 PK	88.2	-42.0	2.08 H	229	32.0	14.2
2	#14230.00	35.8 AV	68.2	-32.4	2.08 H	229	21.6	14.2
3	21345.00	53.7 PK	74.0	-20.3	3.16 H	153	55.3	-1.6
4	21345.00	41.9 AV	54.0	-12.1	3.16 H	153	43.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.5 PK	88.2	-39.7	2.24 V	117	34.3	14.2
2	#14230.00	36.8 AV	68.2	-31.4	2.24 V	117	22.6	14.2
3	21345.00	53.5 PK	74.0	-20.5	1.88 V	302	55.1	-1.6
4	21345.00	40.8 AV	54.0	-13.2	1.88 V	302	42.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	45.6 PK	74.0	-28.4	2.13 H	233	34.1	11.5
2	11930.00	35.3 AV	54.0	-18.7	2.13 H	233	23.8	11.5
3	17895.00	53.2 PK	74.0	-20.8	3.16 H	163	29.3	23.9
4	17895.00	41.6 AV	54.0	-12.4	3.16 H	163	17.7	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.5 PK	74.0	-25.5	2.21 V	111	37.0	11.5
2	11930.00	36.7 AV	54.0	-17.3	2.21 V	111	25.2	11.5
3	17895.00	54.2 PK	74.0	-19.8	1.90 V	305	30.3	23.9
4	17895.00	41.1 AV	54.0	-12.9	1.90 V	305	17.2	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	45.9 PK	74.0	-28.1	2.10 H	228	33.6	12.3
2	12330.00	35.2 AV	54.0	-18.8	2.10 H	228	22.9	12.3
3	18495.00	53.9 PK	74.0	-20.1	3.12 H	140	58.8	-4.9
4	18495.00	42.2 AV	54.0	-11.8	3.12 H	140	47.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.6 PK	74.0	-25.4	2.16 V	103	36.3	12.3
2	12330.00	37.0 AV	54.0	-17.0	2.16 V	103	24.7	12.3
3	18495.00	54.2 PK	74.0	-19.8	1.89 V	299	59.1	-4.9
4	18495.00	41.2 AV	54.0	-12.8	1.89 V	299	46.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	46.1 PK	88.2	-42.1	2.11 H	215	34.4	11.7
2	#12810.00	35.5 AV	68.2	-32.7	2.11 H	215	23.8	11.7
3	19215.00	53.6 PK	74.0	-20.4	3.11 H	136	57.3	-3.7
4	19215.00	41.9 AV	54.0	-12.1	3.11 H	136	45.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.0 PK	88.2	-40.2	2.14 V	95	36.3	11.7
2	#12810.00	36.4 AV	68.2	-31.8	2.14 V	95	24.7	11.7
3	19215.00	53.1 PK	74.0	-20.9	1.83 V	305	56.8	-3.7
4	19215.00	40.4 AV	54.0	-13.6	1.83 V	305	44.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	46.9 PK	88.2	-41.3	2.14 H	227	34.6	12.3
2	#12890.00	36.2 AV	68.2	-32.0	2.14 H	227	23.9	12.3
3	19335.00	53.7 PK	74.0	-20.3	3.19 H	132	57.4	-3.7
4	19335.00	42.0 AV	54.0	-12.0	3.19 H	132	45.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.6 PK	88.2	-39.6	2.21 V	101	36.3	12.3
2	#12890.00	36.8 AV	68.2	-31.4	2.21 V	101	24.5	12.3
3	19335.00	53.8 PK	74.0	-20.2	1.86 V	293	57.5	-3.7
4	19335.00	41.0 AV	54.0	-13.0	1.86 V	293	44.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	46.9 PK	88.2	-41.3	2.11 H	212	34.8	12.1
2	#12970.00	36.1 AV	68.2	-32.1	2.11 H	212	24.0	12.1
3	19455.00	54.3 PK	74.0	-19.7	3.12 H	143	58.2	-3.9
4	19455.00	42.5 AV	54.0	-11.5	3.12 H	143	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	49.0 PK	88.2	-39.2	2.15 V	105	36.9	12.1
2	#12970.00	37.2 AV	68.2	-31.0	2.15 V	105	25.1	12.1
3	19455.00	53.7 PK	74.0	-20.3	1.88 V	309	57.6	-3.9
4	19455.00	40.7 AV	54.0	-13.3	1.88 V	309	44.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	46.3 PK	88.2	-41.9	2.15 H	213	34.0	12.3
2	#13050.00	35.6 AV	68.2	-32.6	2.15 H	213	23.3	12.3
3	19575.00	54.1 PK	74.0	-19.9	3.13 H	159	58.2	-4.1
4	19575.00	42.0 AV	54.0	-12.0	3.13 H	159	46.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	48.9 PK	88.2	-39.3	2.22 V	115	36.6	12.3
2	#13050.00	37.0 AV	68.2	-31.2	2.22 V	115	24.7	12.3
3	19575.00	53.4 PK	74.0	-20.6	1.86 V	301	57.5	-4.1
4	19575.00	40.7 AV	54.0	-13.3	1.86 V	301	44.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	46.6 PK	88.2	-41.6	2.16 H	226	34.0	12.6
2	#13130.00	35.9 AV	68.2	-32.3	2.16 H	226	23.3	12.6
3	19695.00	53.6 PK	74.0	-20.4	3.18 H	159	57.5	-3.9
4	19695.00	41.9 AV	54.0	-12.1	3.18 H	159	45.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.1 PK	88.2	-40.1	2.19 V	93	35.5	12.6
2	#13130.00	36.7 AV	68.2	-31.5	2.19 V	93	24.1	12.6
3	19695.00	54.3 PK	74.0	-19.7	1.88 V	310	58.2	-3.9
4	19695.00	41.3 AV	54.0	-12.7	1.88 V	310	45.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	46.2 PK	88.2	-42.0	2.17 H	221	32.8	13.4
2	#13450.00	35.5 AV	68.2	-32.7	2.17 H	221	22.1	13.4
3	20175.00	53.6 PK	74.0	-20.4	3.16 H	155	56.9	-3.3
4	20175.00	41.8 AV	54.0	-12.2	3.16 H	155	45.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.3 PK	88.2	-39.9	2.16 V	101	34.9	13.4
2	#13450.00	36.6 AV	68.2	-31.6	2.16 V	101	23.2	13.4
3	20175.00	53.8 PK	74.0	-20.2	1.89 V	294	57.1	-3.3
4	20175.00	40.8 AV	54.0	-13.2	1.89 V	294	44.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	46.6 PK	88.2	-41.6	2.10 H	237	32.4	14.2
2	#13690.00	35.8 AV	68.2	-32.4	2.10 H	237	21.6	14.2
3	20535.00	54.2 PK	74.0	-19.8	3.15 H	143	57.4	-3.2
4	20535.00	42.5 AV	54.0	-11.5	3.15 H	143	45.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.4 PK	88.2	-39.8	2.15 V	109	34.2	14.2
2	#13690.00	36.5 AV	68.2	-31.7	2.15 V	109	22.3	14.2
3	20535.00	53.6 PK	74.0	-20.4	1.93 V	280	56.8	-3.2
4	20535.00	40.9 AV	54.0	-13.1	1.93 V	280	44.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	46.5 PK	88.2	-41.7	2.13 H	222	32.5	14.0
2	#13770.00	35.8 AV	68.2	-32.4	2.13 H	222	21.8	14.0
3	20655.00	54.2 PK	74.0	-19.8	3.18 H	154	57.5	-3.3
4	20655.00	42.1 AV	54.0	-11.9	3.18 H	154	45.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.0 PK	88.2	-40.2	2.17 V	95	34.0	14.0
2	#13770.00	36.3 AV	68.2	-31.9	2.17 V	95	22.3	14.0
3	20655.00	53.9 PK	74.0	-20.1	1.81 V	283	57.2	-3.3
4	20655.00	40.8 AV	54.0	-13.2	1.81 V	283	44.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	46.6 PK	88.2	-41.6	2.19 H	222	32.0	14.6
2	#14010.00	35.8 AV	68.2	-32.4	2.19 H	222	21.2	14.6
3	21015.00	53.4 PK	74.0	-20.6	3.18 H	136	56.1	-2.7
4	21015.00	41.9 AV	54.0	-12.1	3.18 H	136	44.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.3 PK	88.2	-39.9	2.12 V	96	33.7	14.6
2	#14010.00	36.7 AV	68.2	-31.5	2.12 V	96	22.1	14.6
3	21015.00	53.9 PK	74.0	-20.1	1.81 V	292	56.6	-2.7
4	21015.00	40.6 AV	54.0	-13.4	1.81 V	292	43.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	46.7 PK	88.2	-41.5	2.16 H	227	32.3	14.4
2	#14170.00	36.1 AV	68.2	-32.1	2.16 H	227	21.7	14.4
3	21255.00	53.8 PK	74.0	-20.2	3.11 H	162	55.2	-1.4
4	21255.00	41.8 AV	54.0	-12.2	3.11 H	162	43.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.2 PK	88.2	-40.0	2.23 V	107	33.8	14.4
2	#14170.00	36.6 AV	68.2	-31.6	2.23 V	107	22.2	14.4
3	21255.00	54.0 PK	74.0	-20.0	1.82 V	305	55.4	-1.4
4	21255.00	40.8 AV	54.0	-13.2	1.82 V	305	42.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.9 PK	74.0	-28.1	2.18 H	219	34.4	11.5
2	11970.00	35.4 AV	54.0	-18.6	2.18 H	219	23.9	11.5
3	17955.00	54.6 PK	74.0	-19.4	3.13 H	154	28.9	25.7
4	17955.00	42.6 AV	54.0	-11.4	3.13 H	154	16.9	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.6 PK	74.0	-25.4	2.20 V	122	37.1	11.5
2	11970.00	37.3 AV	54.0	-16.7	2.20 V	122	25.8	11.5
3	17955.00	53.2 PK	74.0	-20.8	1.87 V	297	27.5	25.7
4	17955.00	40.6 AV	54.0	-13.4	1.87 V	297	14.9	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	45.7 PK	74.0	-28.3	2.09 H	231	33.3	12.4
2	12290.00	35.3 AV	54.0	-18.7	2.09 H	231	22.9	12.4
3	18435.00	53.3 PK	74.0	-20.7	3.18 H	157	58.2	-4.9
4	18435.00	41.6 AV	54.0	-12.4	3.18 H	157	46.5	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	47.8 PK	74.0	-26.2	2.19 V	112	35.4	12.4
2	12290.00	36.4 AV	54.0	-17.6	2.19 V	112	24.0	12.4
3	18435.00	54.4 PK	74.0	-19.6	1.90 V	297	59.3	-4.9
4	18435.00	41.2 AV	54.0	-12.8	1.90 V	297	46.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.4 PK	88.2	-41.8	2.11 H	221	34.8	11.6
2	#12770.00	35.8 AV	68.2	-32.4	2.11 H	221	24.2	11.6
3	19155.00	53.6 PK	74.0	-20.4	3.09 H	160	57.4	-3.8
4	19155.00	41.7 AV	54.0	-12.3	3.09 H	160	45.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.3 PK	88.2	-39.9	2.17 V	121	36.7	11.6
2	#12770.00	36.4 AV	68.2	-31.8	2.17 V	121	24.8	11.6
3	19155.00	54.3 PK	74.0	-19.7	1.91 V	290	58.1	-3.8
4	19155.00	41.2 AV	54.0	-12.8	1.91 V	290	45.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	46.3 PK	88.2	-41.9	2.19 H	233	34.0	12.3
2	#12930.00	35.7 AV	68.2	-32.5	2.19 H	233	23.4	12.3
3	19395.00	53.8 PK	74.0	-20.2	3.19 H	151	57.5	-3.7
4	19395.00	42.0 AV	54.0	-12.0	3.19 H	151	45.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.2 PK	88.2	-40.0	2.13 V	95	35.9	12.3
2	#12930.00	36.9 AV	68.2	-31.3	2.13 V	95	24.6	12.3
3	19395.00	53.8 PK	74.0	-20.2	1.87 V	284	57.5	-3.7
4	19395.00	41.2 AV	54.0	-12.8	1.87 V	284	44.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	46.9 PK	88.2	-41.3	2.13 H	213	34.5	12.4
2	#13090.00	36.1 AV	68.2	-32.1	2.13 H	213	23.7	12.4
3	19635.00	53.7 PK	74.0	-20.3	3.19 H	148	57.7	-4.0
4	19635.00	42.0 AV	54.0	-12.0	3.19 H	148	46.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.4 PK	88.2	-39.8	2.14 V	110	36.0	12.4
2	#13090.00	36.6 AV	68.2	-31.6	2.14 V	110	24.2	12.4
3	19635.00	53.3 PK	74.0	-20.7	1.89 V	301	57.3	-4.0
4	19635.00	40.4 AV	54.0	-13.6	1.89 V	301	44.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	46.0 PK	88.2	-42.2	2.09 H	237	32.7	13.3
2	#13410.00	35.4 AV	68.2	-32.8	2.09 H	237	22.1	13.3
3	20115.00	54.1 PK	74.0	-19.9	3.17 H	133	57.6	-3.5
4	20115.00	42.5 AV	54.0	-11.5	3.17 H	133	46.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.9 PK	88.2	-39.3	2.19 V	93	35.6	13.3
2	#13410.00	37.2 AV	68.2	-31.0	2.19 V	93	23.9	13.3
3	20115.00	54.2 PK	74.0	-19.8	1.84 V	283	57.7	-3.5
4	20115.00	41.3 AV	54.0	-12.7	1.84 V	283	44.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	46.1 PK	88.2	-42.1	2.20 H	213	32.1	14.0
2	#13730.00	35.3 AV	68.2	-32.9	2.20 H	213	21.3	14.0
3	20595.00	53.7 PK	74.0	-20.3	3.10 H	158	57.0	-3.3
4	20595.00	41.7 AV	54.0	-12.3	3.10 H	158	45.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.5 PK	88.2	-39.7	2.19 V	111	34.5	14.0
2	#13730.00	36.8 AV	68.2	-31.4	2.19 V	111	22.8	14.0
3	20595.00	53.7 PK	74.0	-20.3	1.87 V	295	57.0	-3.3
4	20595.00	40.6 AV	54.0	-13.4	1.87 V	295	43.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	46.6 PK	88.2	-41.6	2.15 H	208	32.4	14.2
2	#13890.00	35.6 AV	68.2	-32.6	2.15 H	208	21.4	14.2
3	20835.00	53.5 PK	74.0	-20.5	3.07 H	165	56.4	-2.9
4	20835.00	41.5 AV	54.0	-12.5	3.07 H	165	44.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.9 PK	88.2	-39.3	2.24 V	117	34.7	14.2
2	#13890.00	37.0 AV	68.2	-31.2	2.24 V	117	22.8	14.2
3	20835.00	53.4 PK	74.0	-20.6	1.91 V	300	56.3	-2.9
4	20835.00	40.3 AV	54.0	-13.7	1.91 V	300	43.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	45.6 PK	88.2	-42.6	2.20 H	206	30.9	14.7
2	#14050.00	34.9 AV	68.2	-33.3	2.20 H	206	20.2	14.7
3	21075.00	53.7 PK	74.0	-20.3	3.10 H	169	55.9	-2.2
4	21075.00	41.4 AV	54.0	-12.6	3.10 H	169	43.6	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.2 PK	88.2	-40.0	2.13 V	125	33.5	14.7
2	#14050.00	36.5 AV	68.2	-31.7	2.13 V	125	21.8	14.7
3	21075.00	54.0 PK	74.0	-20.0	1.87 V	280	56.2	-2.2
4	21075.00	41.0 AV	54.0	-13.0	1.87 V	280	43.2	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.1 PK	74.0	-27.9	2.20 H	234	34.2	11.9
2	12050.00	35.4 AV	54.0	-18.6	2.20 H	234	23.5	11.9
3	18075.00	54.1 PK	74.0	-19.9	3.20 H	158	58.8	-4.7
4	18075.00	42.5 AV	54.0	-11.5	3.20 H	158	47.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.2 PK	74.0	-25.8	2.16 V	105	36.3	11.9
2	12050.00	36.5 AV	54.0	-17.5	2.16 V	105	24.6	11.9
3	18075.00	54.2 PK	74.0	-19.8	1.83 V	280	58.9	-4.7
4	18075.00	41.1 AV	54.0	-12.9	1.83 V	280	45.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	46.5 PK	74.0	-27.5	2.13 H	231	34.7	11.8
2	12370.00	36.2 AV	54.0	-17.8	2.13 H	231	24.4	11.8
3	18555.00	54.3 PK	74.0	-19.7	3.09 H	134	59.2	-4.9
4	18555.00	42.4 AV	54.0	-11.6	3.09 H	134	47.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	47.7 PK	74.0	-26.3	2.23 V	104	35.9	11.8
2	12370.00	36.4 AV	54.0	-17.6	2.23 V	104	24.6	11.8
3	18555.00	54.4 PK	74.0	-19.6	1.86 V	284	59.3	-4.9
4	18555.00	41.3 AV	54.0	-12.7	1.86 V	284	46.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	46.1 PK	74.0	-27.9	2.14 H	212	34.6	11.5
2	12690.00	35.5 AV	54.0	-18.5	2.14 H	212	24.0	11.5
3	19035.00	54.2 PK	74.0	-19.8	3.12 H	156	58.1	-3.9
4	19035.00	42.2 AV	54.0	-11.8	3.12 H	156	46.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.4 PK	74.0	-25.6	2.22 V	113	36.9	11.5
2	12690.00	36.7 AV	54.0	-17.3	2.22 V	113	25.2	11.5
3	19035.00	53.6 PK	74.0	-20.4	1.92 V	298	57.5	-3.9
4	19035.00	40.6 AV	54.0	-13.4	1.92 V	298	44.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	46.2 PK	88.2	-42.0	2.17 H	207	34.2	12.0
2	#13010.00	35.6 AV	68.2	-32.6	2.17 H	207	23.6	12.0
3	19515.00	53.8 PK	74.0	-20.2	3.19 H	144	57.9	-4.1
4	19515.00	42.1 AV	54.0	-11.9	3.19 H	144	46.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	48.5 PK	88.2	-39.7	2.22 V	102	36.5	12.0
2	#13010.00	36.7 AV	68.2	-31.5	2.22 V	102	24.7	12.0
3	19515.00	54.5 PK	74.0	-19.5	1.87 V	287	58.6	-4.1
4	19515.00	41.4 AV	54.0	-12.6	1.87 V	287	45.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.4 PK	74.0	-27.6	2.20 H	236	33.3	13.1
2	13330.00	35.7 AV	54.0	-18.3	2.20 H	236	22.6	13.1
3	19995.00	54.0 PK	74.0	-20.0	3.20 H	145	57.6	-3.6
4	19995.00	41.9 AV	54.0	-12.1	3.20 H	145	45.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.5 PK	74.0	-25.5	2.21 V	119	35.4	13.1
2	13330.00	36.9 AV	54.0	-17.1	2.21 V	119	23.8	13.1
3	19995.00	54.1 PK	74.0	-19.9	1.82 V	286	57.7	-3.6
4	19995.00	41.0 AV	54.0	-13.0	1.82 V	286	44.6	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.1 PK	88.2	-42.1	2.16 H	227	32.1	14.0
2	#13650.00	35.8 AV	68.2	-32.4	2.16 H	227	21.8	14.0
3	20475.00	53.9 PK	74.0	-20.1	3.14 H	161	57.1	-3.2
4	20475.00	41.8 AV	54.0	-12.2	3.14 H	161	45.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	49.0 PK	88.2	-39.2	2.14 V	114	35.0	14.0
2	#13650.00	37.2 AV	68.2	-31.0	2.14 V	114	23.2	14.0
3	20475.00	54.3 PK	74.0	-19.7	1.84 V	284	57.5	-3.2
4	20475.00	41.2 AV	54.0	-12.8	1.84 V	284	44.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.2 PK	88.2	-42.0	2.13 H	229	31.8	14.4
2	#13970.00	35.8 AV	68.2	-32.4	2.13 H	229	21.4	14.4
3	20955.00	53.9 PK	74.0	-20.1	3.10 H	148	56.6	-2.7
4	20955.00	42.2 AV	54.0	-11.8	3.10 H	148	44.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.1 PK	88.2	-39.1	2.17 V	103	34.7	14.4
2	#13970.00	37.3 AV	68.2	-30.9	2.17 V	103	22.9	14.4
3	20955.00	54.3 PK	74.0	-19.7	1.87 V	305	57.0	-2.7
4	20955.00	41.3 AV	54.0	-12.7	1.87 V	305	44.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

1S1T

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.5 PK	74.0	-29.5	2.17 H	192	32.9	11.6
2	11870.00	33.8 AV	54.0	-20.2	2.17 H	192	22.2	11.6
3	17805.00	48.4 PK	74.0	-25.6	2.10 H	139	26.6	21.8
4	17805.00	37.0 AV	54.0	-17.0	2.10 H	139	15.2	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.6 PK	74.0	-28.4	1.23 V	181	34.0	11.6
2	11870.00	35.4 AV	54.0	-18.6	1.23 V	181	23.8	11.6
3	17805.00	51.0 PK	74.0	-23.0	2.34 V	233	29.2	21.8
4	17805.00	39.9 AV	54.0	-14.1	2.34 V	233	18.1	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.9 PK	74.0	-29.1	2.22 H	179	33.4	11.5
2	11910.00	34.1 AV	54.0	-19.9	2.22 H	179	22.6	11.5
3	17865.00	48.5 PK	74.0	-25.5	2.09 H	136	25.3	23.2
4	17865.00	37.2 AV	54.0	-16.8	2.09 H	136	14.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.9 PK	74.0	-28.1	1.20 V	183	34.4	11.5
2	11910.00	35.7 AV	54.0	-18.3	1.20 V	183	24.2	11.5
3	17865.00	51.1 PK	74.0	-22.9	2.29 V	225	27.9	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.29 V	225	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.1 PK	88.2	-43.1	2.27 H	178	33.2	11.9
2	#12830.00	34.0 AV	68.2	-34.2	2.27 H	178	22.1	11.9
3	19245.00	48.0 PK	74.0	-26.0	2.04 H	145	51.8	-3.8
4	19245.00	36.9 AV	54.0	-17.1	2.04 H	145	40.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.7 PK	88.2	-42.5	1.23 V	175	33.8	11.9
2	#12830.00	35.7 AV	68.2	-32.5	1.23 V	175	23.8	11.9
3	19245.00	51.3 PK	74.0	-22.7	2.32 V	217	55.1	-3.8
4	19245.00	40.2 AV	54.0	-13.8	2.32 V	217	44.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.6 PK	88.2	-43.6	2.17 H	168	32.5	12.1
2	#12870.00	33.8 AV	68.2	-34.4	2.17 H	168	21.7	12.1
3	19305.00	49.2 PK	74.0	-24.8	2.08 H	144	52.9	-3.7
4	19305.00	37.6 AV	54.0	-16.4	2.08 H	144	41.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.1 PK	88.2	-42.1	1.25 V	171	34.0	12.1
2	#12870.00	35.7 AV	68.2	-32.5	1.25 V	171	23.6	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.27 V	211	54.7	-3.7
4	19305.00	40.2 AV	54.0	-13.8	2.27 V	211	43.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.7 PK	88.2	-43.5	2.21 H	191	32.6	12.1
2	#13030.00	33.9 AV	68.2	-34.3	2.21 H	191	21.8	12.1
3	19545.00	48.0 PK	74.0	-26.0	2.13 H	133	52.1	-4.1
4	19545.00	36.7 AV	54.0	-17.3	2.13 H	133	40.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.5 PK	88.2	-42.7	1.22 V	181	33.4	12.1
2	#13030.00	35.5 AV	68.2	-32.7	1.22 V	181	23.4	12.1
3	19545.00	50.8 PK	74.0	-23.2	2.27 V	232	54.9	-4.1
4	19545.00	40.2 AV	54.0	-13.8	2.27 V	232	44.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.9 PK	88.2	-43.3	2.20 H	179	32.5	12.4
2	#13070.00	34.1 AV	68.2	-34.1	2.20 H	179	21.7	12.4
3	19605.00	48.3 PK	74.0	-25.7	2.05 H	122	52.3	-4.0
4	19605.00	36.9 AV	54.0	-17.1	2.05 H	122	40.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.8 PK	88.2	-42.4	1.17 V	195	33.4	12.4
2	#13070.00	35.4 AV	68.2	-32.8	1.17 V	195	23.0	12.4
3	19605.00	51.0 PK	74.0	-23.0	2.24 V	220	55.0	-4.0
4	19605.00	40.1 AV	54.0	-13.9	2.24 V	220	44.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	44.5 PK	88.2	-43.7	2.27 H	173	30.5	14.0
2	#13750.00	34.0 AV	68.2	-34.2	2.27 H	173	20.0	14.0
3	20625.00	48.2 PK	74.0	-25.8	2.10 H	135	51.5	-3.3
4	20625.00	37.0 AV	54.0	-17.0	2.10 H	135	40.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.7 PK	88.2	-42.5	1.22 V	178	31.7	14.0
2	#13750.00	35.3 AV	68.2	-32.9	1.22 V	178	21.3	14.0
3	20625.00	51.2 PK	74.0	-22.8	2.30 V	218	54.5	-3.3
4	20625.00	40.0 AV	54.0	-14.0	2.30 V	218	43.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.2 PK	88.2	-43.0	2.27 H	177	30.8	14.4
2	#13990.00	34.3 AV	68.2	-33.9	2.27 H	177	19.9	14.4
3	20985.00	48.1 PK	74.0	-25.9	2.07 H	143	50.9	-2.8
4	20985.00	36.9 AV	54.0	-17.1	2.07 H	143	39.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.0 PK	88.2	-42.2	1.17 V	191	31.6	14.4
2	#13990.00	36.0 AV	68.2	-32.2	1.17 V	191	21.6	14.4
3	20985.00	50.5 PK	74.0	-23.5	2.29 V	213	53.3	-2.8
4	20985.00	39.9 AV	54.0	-14.1	2.29 V	213	42.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.5 PK	88.2	-42.7	2.22 H	188	31.3	14.2
2	#14230.00	34.6 AV	68.2	-33.6	2.22 H	188	20.4	14.2
3	21345.00	48.4 PK	74.0	-25.6	2.04 H	143	50.0	-1.6
4	21345.00	37.1 AV	54.0	-16.9	2.04 H	143	38.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.4 PK	88.2	-41.8	1.26 V	186	32.2	14.2
2	#14230.00	36.2 AV	68.2	-32.0	1.26 V	186	22.0	14.2
3	21345.00	50.7 PK	74.0	-23.3	2.33 V	216	52.3	-1.6
4	21345.00	40.0 AV	54.0	-14.0	2.33 V	216	41.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.9 PK	74.0	-29.1	2.20 H	186	33.3	11.6
2	11870.00	34.3 AV	54.0	-19.7	2.20 H	186	22.7	11.6
3	17805.00	48.8 PK	74.0	-25.2	2.03 H	118	27.0	21.8
4	17805.00	37.4 AV	54.0	-16.6	2.03 H	118	15.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.6 PK	74.0	-26.4	1.21 V	194	36.0	11.6
2	11870.00	37.1 AV	54.0	-16.9	1.21 V	194	25.5	11.6
3	17805.00	50.2 PK	74.0	-23.8	2.38 V	218	28.4	21.8
4	17805.00	39.7 AV	54.0	-14.3	2.38 V	218	17.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.5 PK	74.0	-29.5	2.23 H	182	33.0	11.5
2	11910.00	34.0 AV	54.0	-20.0	2.23 H	182	22.5	11.5
3	17865.00	48.4 PK	74.0	-25.6	2.06 H	127	25.2	23.2
4	17865.00	37.0 AV	54.0	-17.0	2.06 H	127	13.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.0 PK	74.0	-27.0	1.22 V	178	35.5	11.5
2	11910.00	36.7 AV	54.0	-17.3	1.22 V	178	25.2	11.5
3	17865.00	50.9 PK	74.0	-23.1	2.33 V	230	27.7	23.2
4	17865.00	40.1 AV	54.0	-13.9	2.33 V	230	16.9	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.9 PK	88.2	-43.3	2.21 H	183	33.0	11.9
2	#12830.00	34.3 AV	68.2	-33.9	2.21 H	183	22.4	11.9
3	19245.00	48.4 PK	74.0	-25.6	2.14 H	126	52.2	-3.8
4	19245.00	37.3 AV	54.0	-16.7	2.14 H	126	41.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.5 PK	88.2	-42.7	1.17 V	190	33.6	11.9
2	#12830.00	35.3 AV	68.2	-32.9	1.17 V	190	23.4	11.9
3	19245.00	50.3 PK	74.0	-23.7	2.23 V	212	54.1	-3.8
4	19245.00	39.7 AV	54.0	-14.3	2.23 V	212	43.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.8 PK	88.2	-43.4	2.19 H	173	32.7	12.1
2	#12870.00	33.8 AV	68.2	-34.4	2.19 H	173	21.7	12.1
3	19305.00	48.1 PK	74.0	-25.9	2.14 H	141	51.8	-3.7
4	19305.00	36.8 AV	54.0	-17.2	2.14 H	141	40.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.1 PK	88.2	-43.1	1.16 V	175	33.0	12.1
2	#12870.00	35.2 AV	68.2	-33.0	1.16 V	175	23.1	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.32 V	219	54.7	-3.7
4	19305.00	39.9 AV	54.0	-14.1	2.32 V	219	43.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.2 PK	88.2	-43.0	2.16 H	169	33.1	12.1
2	#13030.00	34.3 AV	68.2	-33.9	2.16 H	169	22.2	12.1
3	19545.00	48.6 PK	74.0	-25.4	2.08 H	131	52.7	-4.1
4	19545.00	37.3 AV	54.0	-16.7	2.08 H	131	41.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.4 PK	88.2	-41.8	1.23 V	182	34.3	12.1
2	#13030.00	36.1 AV	68.2	-32.1	1.23 V	182	24.0	12.1
3	19545.00	51.2 PK	74.0	-22.8	2.24 V	225	55.3	-4.1
4	19545.00	40.5 AV	54.0	-13.5	2.24 V	225	44.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.5 PK	88.2	-43.7	2.23 H	174	32.1	12.4
2	#13070.00	33.8 AV	68.2	-34.4	2.23 H	174	21.4	12.4
3	19605.00	49.1 PK	74.0	-24.9	2.09 H	142	53.1	-4.0
4	19605.00	37.6 AV	54.0	-16.4	2.09 H	142	41.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.6 PK	88.2	-42.6	1.25 V	192	33.2	12.4
2	#13070.00	35.3 AV	68.2	-32.9	1.25 V	192	22.9	12.4
3	19605.00	50.9 PK	74.0	-23.1	2.25 V	232	54.9	-4.0
4	19605.00	40.0 AV	54.0	-14.0	2.25 V	232	44.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.0 PK	88.2	-43.2	2.19 H	173	31.0	14.0
2	#13750.00	34.3 AV	68.2	-33.9	2.19 H	173	20.3	14.0
3	20625.00	48.1 PK	74.0	-25.9	2.13 H	127	51.4	-3.3
4	20625.00	36.8 AV	54.0	-17.2	2.13 H	127	40.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.7 PK	88.2	-42.5	1.21 V	174	31.7	14.0
2	#13750.00	35.4 AV	68.2	-32.8	1.21 V	174	21.4	14.0
3	20625.00	50.9 PK	74.0	-23.1	2.32 V	241	54.2	-3.3
4	20625.00	40.0 AV	54.0	-14.0	2.32 V	241	43.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.8 PK	88.2	-43.4	2.27 H	178	30.4	14.4
2	#13990.00	33.8 AV	68.2	-34.4	2.27 H	178	19.4	14.4
3	20985.00	48.1 PK	74.0	-25.9	2.10 H	151	50.9	-2.8
4	20985.00	36.8 AV	54.0	-17.2	2.10 H	151	39.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.4 PK	88.2	-42.8	1.23 V	174	31.0	14.4
2	#13990.00	35.3 AV	68.2	-32.9	1.23 V	174	20.9	14.4
3	20985.00	51.8 PK	74.0	-22.2	2.28 V	234	54.6	-2.8
4	20985.00	40.7 AV	54.0	-13.3	2.28 V	234	43.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.1 PK	88.2	-43.1	2.28 H	180	30.9	14.2
2	#14230.00	34.1 AV	68.2	-34.1	2.28 H	180	19.9	14.2
3	21345.00	48.1 PK	74.0	-25.9	2.13 H	121	49.7	-1.6
4	21345.00	36.7 AV	54.0	-17.3	2.13 H	121	38.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.8 PK	88.2	-42.4	1.24 V	196	31.6	14.2
2	#14230.00	35.8 AV	68.2	-32.4	1.24 V	196	21.6	14.2
3	21345.00	51.0 PK	74.0	-23.0	2.34 V	239	52.6	-1.6
4	21345.00	39.9 AV	54.0	-14.1	2.34 V	239	41.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.1 PK	74.0	-28.9	2.28 H	190	33.5	11.6
2	11870.00	34.0 AV	54.0	-20.0	2.28 H	190	22.4	11.6
3	17805.00	48.1 PK	74.0	-25.9	2.05 H	112	26.3	21.8
4	17805.00	36.8 AV	54.0	-17.2	2.05 H	112	15.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.1 PK	74.0	-27.9	1.22 V	161	34.5	11.6
2	11870.00	36.0 AV	54.0	-18.0	1.22 V	161	24.4	11.6
3	17805.00	50.9 PK	74.0	-23.1	2.26 V	209	29.1	21.8
4	17805.00	40.0 AV	54.0	-14.0	2.26 V	209	18.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.7 PK	74.0	-29.3	2.25 H	182	33.2	11.5
2	11910.00	33.7 AV	54.0	-20.3	2.25 H	182	22.2	11.5
3	17865.00	48.3 PK	74.0	-25.7	2.04 H	121	25.1	23.2
4	17865.00	37.2 AV	54.0	-16.8	2.04 H	121	14.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.6 PK	74.0	-28.4	1.21 V	169	34.1	11.5
2	11910.00	35.6 AV	54.0	-18.4	1.21 V	169	24.1	11.5
3	17865.00	51.3 PK	74.0	-22.7	2.26 V	218	28.1	23.2
4	17865.00	40.3 AV	54.0	-13.7	2.26 V	218	17.1	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.6 PK	88.2	-43.6	2.24 H	186	32.7	11.9
2	#12830.00	34.1 AV	68.2	-34.1	2.24 H	186	22.2	11.9
3	19245.00	48.3 PK	74.0	-25.7	2.11 H	132	52.1	-3.8
4	19245.00	37.1 AV	54.0	-16.9	2.11 H	132	40.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.8 PK	88.2	-42.4	1.26 V	198	33.9	11.9
2	#12830.00	35.4 AV	68.2	-32.8	1.26 V	198	23.5	11.9
3	19245.00	51.2 PK	74.0	-22.8	2.29 V	240	55.0	-3.8
4	19245.00	40.2 AV	54.0	-13.8	2.29 V	240	44.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.1 PK	88.2	-43.1	2.26 H	176	33.0	12.1
2	#12870.00	34.1 AV	68.2	-34.1	2.26 H	176	22.0	12.1
3	19305.00	47.8 PK	74.0	-26.2	2.13 H	134	51.5	-3.7
4	19305.00	36.8 AV	54.0	-17.2	2.13 H	134	40.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.3 PK	88.2	-41.9	1.17 V	186	34.2	12.1
2	#12870.00	35.8 AV	68.2	-32.4	1.17 V	186	23.7	12.1
3	19305.00	51.4 PK	74.0	-22.6	2.31 V	226	55.1	-3.7
4	19305.00	40.4 AV	54.0	-13.6	2.31 V	226	44.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.3 PK	88.2	-42.9	2.20 H	192	33.2	12.1
2	#13030.00	34.3 AV	68.2	-33.9	2.20 H	192	22.2	12.1
3	19545.00	47.9 PK	74.0	-26.1	2.09 H	142	52.0	-4.1
4	19545.00	36.8 AV	54.0	-17.2	2.09 H	142	40.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.8 PK	88.2	-42.4	1.23 V	175	33.7	12.1
2	#13030.00	35.3 AV	68.2	-32.9	1.23 V	175	23.2	12.1
3	19545.00	51.2 PK	74.0	-22.8	2.33 V	222	55.3	-4.1
4	19545.00	40.4 AV	54.0	-13.6	2.33 V	222	44.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.7 PK	88.2	-43.5	2.15 H	181	32.3	12.4
2	#13070.00	34.0 AV	68.2	-34.2	2.15 H	181	21.6	12.4
3	19605.00	48.0 PK	74.0	-26.0	2.04 H	140	52.0	-4.0
4	19605.00	36.8 AV	54.0	-17.2	2.04 H	140	40.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.9 PK	88.2	-42.3	1.17 V	179	33.5	12.4
2	#13070.00	35.4 AV	68.2	-32.8	1.17 V	179	23.0	12.4
3	19605.00	50.8 PK	74.0	-23.2	2.30 V	221	54.8	-4.0
4	19605.00	40.1 AV	54.0	-13.9	2.30 V	221	44.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.3 PK	88.2	-42.9	2.23 H	188	31.3	14.0
2	#13750.00	34.4 AV	68.2	-33.8	2.23 H	188	20.4	14.0
3	20625.00	48.8 PK	74.0	-25.2	2.11 H	121	52.1	-3.3
4	20625.00	37.3 AV	54.0	-16.7	2.11 H	121	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.2 PK	88.2	-42.0	1.18 V	190	32.2	14.0
2	#13750.00	35.9 AV	68.2	-32.3	1.18 V	190	21.9	14.0
3	20625.00	51.0 PK	74.0	-23.0	2.24 V	231	54.3	-3.3
4	20625.00	40.4 AV	54.0	-13.6	2.24 V	231	43.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.3 PK	88.2	-43.9	2.24 H	165	29.9	14.4
2	#13990.00	33.6 AV	68.2	-34.6	2.24 H	165	19.2	14.4
3	20985.00	49.0 PK	74.0	-25.0	2.14 H	141	51.8	-2.8
4	20985.00	37.6 AV	54.0	-16.4	2.14 H	141	40.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.8 PK	88.2	-42.4	1.20 V	193	31.4	14.4
2	#13990.00	35.3 AV	68.2	-32.9	1.20 V	193	20.9	14.4
3	20985.00	51.3 PK	74.0	-22.7	2.29 V	233	54.1	-2.8
4	20985.00	40.7 AV	54.0	-13.3	2.29 V	233	43.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.6 PK	88.2	-43.6	2.23 H	165	30.4	14.2
2	#14230.00	33.8 AV	68.2	-34.4	2.23 H	165	19.6	14.2
3	21345.00	49.2 PK	74.0	-24.8	2.13 H	130	50.8	-1.6
4	21345.00	37.6 AV	54.0	-16.4	2.13 H	130	39.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.6 PK	88.2	-42.6	1.19 V	175	31.4	14.2
2	#14230.00	35.3 AV	68.2	-32.9	1.19 V	175	21.1	14.2
3	21345.00	51.4 PK	74.0	-22.6	2.26 V	239	53.0	-1.6
4	21345.00	40.6 AV	54.0	-13.4	2.26 V	239	42.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

1S1T

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.9 PK	74.0	-29.1	2.16 H	175	33.3	11.6
2	11870.00	34.1 AV	54.0	-19.9	2.16 H	175	22.5	11.6
3	17805.00	48.6 PK	74.0	-25.4	2.17 H	115	26.8	21.8
4	17805.00	37.2 AV	54.0	-16.8	2.17 H	115	15.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.3 PK	74.0	-28.7	1.20 V	168	33.7	11.6
2	11870.00	35.4 AV	54.0	-18.6	1.20 V	168	23.8	11.6
3	17805.00	50.8 PK	74.0	-23.2	2.30 V	203	29.0	21.8
4	17805.00	39.8 AV	54.0	-14.2	2.30 V	203	18.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.2 PK	74.0	-28.8	2.21 H	170	33.7	11.5
2	11910.00	34.4 AV	54.0	-19.6	2.21 H	170	22.9	11.5
3	17865.00	47.9 PK	74.0	-26.1	2.12 H	127	24.7	23.2
4	17865.00	36.8 AV	54.0	-17.2	2.12 H	127	13.6	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.5 PK	74.0	-28.5	1.25 V	177	34.0	11.5
2	11910.00	35.5 AV	54.0	-18.5	1.25 V	177	24.0	11.5
3	17865.00	51.2 PK	74.0	-22.8	2.32 V	211	28.0	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.32 V	211	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.3 PK	88.2	-43.9	2.20 H	178	32.4	11.9
2	#12830.00	33.6 AV	68.2	-34.6	2.20 H	178	21.7	11.9
3	19245.00	48.9 PK	74.0	-25.1	2.15 H	130	52.7	-3.8
4	19245.00	37.4 AV	54.0	-16.6	2.15 H	130	41.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.4 PK	88.2	-42.8	1.22 V	197	33.5	11.9
2	#12830.00	35.2 AV	68.2	-33.0	1.22 V	197	23.3	11.9
3	19245.00	51.1 PK	74.0	-22.9	2.32 V	229	54.9	-3.8
4	19245.00	39.9 AV	54.0	-14.1	2.32 V	229	43.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.2 PK	88.2	-43.0	2.16 H	186	33.1	12.1
2	#12870.00	34.2 AV	68.2	-34.0	2.16 H	186	22.1	12.1
3	19305.00	48.1 PK	74.0	-25.9	2.07 H	122	51.8	-3.7
4	19305.00	37.0 AV	54.0	-17.0	2.07 H	122	40.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.9 PK	88.2	-42.3	1.18 V	193	33.8	12.1
2	#12870.00	35.9 AV	68.2	-32.3	1.18 V	193	23.8	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.28 V	213	54.7	-3.7
4	19305.00	39.9 AV	54.0	-14.1	2.28 V	213	43.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.3 PK	88.2	-43.9	2.25 H	175	32.2	12.1
2	#13030.00	33.6 AV	68.2	-34.6	2.25 H	175	21.5	12.1
3	19545.00	48.3 PK	74.0	-25.7	2.05 H	131	52.4	-4.1
4	19545.00	37.1 AV	54.0	-16.9	2.05 H	131	41.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.9 PK	88.2	-42.3	1.25 V	193	33.8	12.1
2	#13030.00	35.9 AV	68.2	-32.3	1.25 V	193	23.8	12.1
3	19545.00	51.4 PK	74.0	-22.6	2.25 V	217	55.5	-4.1
4	19545.00	40.6 AV	54.0	-13.4	2.25 V	217	44.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.6 PK	88.2	-43.6	2.25 H	174	32.2	12.4
2	#13070.00	33.8 AV	68.2	-34.4	2.25 H	174	21.4	12.4
3	19605.00	48.9 PK	74.0	-25.1	2.04 H	144	52.9	-4.0
4	19605.00	37.6 AV	54.0	-16.4	2.04 H	144	41.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.9 PK	88.2	-42.3	1.18 V	184	33.5	12.4
2	#13070.00	35.9 AV	68.2	-32.3	1.18 V	184	23.5	12.4
3	19605.00	51.5 PK	74.0	-22.5	2.30 V	220	55.5	-4.0
4	19605.00	40.5 AV	54.0	-13.5	2.30 V	220	44.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.0 PK	88.2	-43.2	2.21 H	174	31.0	14.0
2	#13750.00	33.9 AV	68.2	-34.3	2.21 H	174	19.9	14.0
3	20625.00	48.9 PK	74.0	-25.1	2.07 H	137	52.2	-3.3
4	20625.00	37.4 AV	54.0	-16.6	2.07 H	137	40.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.8 PK	88.2	-42.4	1.26 V	187	31.8	14.0
2	#13750.00	35.5 AV	68.2	-32.7	1.26 V	187	21.5	14.0
3	20625.00	51.3 PK	74.0	-22.7	2.27 V	212	54.6	-3.3
4	20625.00	40.1 AV	54.0	-13.9	2.27 V	212	43.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.6 PK	88.2	-43.6	2.22 H	184	30.2	14.4
2	#13990.00	34.1 AV	68.2	-34.1	2.22 H	184	19.7	14.4
3	20985.00	48.3 PK	74.0	-25.7	2.07 H	142	51.1	-2.8
4	20985.00	37.2 AV	54.0	-16.8	2.07 H	142	40.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.7 PK	88.2	-42.5	1.16 V	171	31.3	14.4
2	#13990.00	35.5 AV	68.2	-32.7	1.16 V	171	21.1	14.4
3	20985.00	51.0 PK	74.0	-23.0	2.29 V	233	53.8	-2.8
4	20985.00	39.9 AV	54.0	-14.1	2.29 V	233	42.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.5 PK	88.2	-43.7	2.22 H	197	30.3	14.2
2	#14230.00	34.2 AV	68.2	-34.0	2.22 H	197	20.0	14.2
3	21345.00	48.7 PK	74.0	-25.3	2.03 H	154	50.3	-1.6
4	21345.00	37.6 AV	54.0	-16.4	2.03 H	154	39.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.0 PK	88.2	-42.2	1.30 V	189	31.8	14.2
2	#14230.00	35.9 AV	68.2	-32.3	1.30 V	189	21.7	14.2
3	21345.00	50.8 PK	74.0	-23.2	2.27 V	210	52.4	-1.6
4	21345.00	39.7 AV	54.0	-14.3	2.27 V	210	41.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.7 PK	74.0	-29.3	2.22 H	174	33.1	11.6
2	11870.00	33.8 AV	54.0	-20.2	2.22 H	174	22.2	11.6
3	17805.00	48.8 PK	74.0	-25.2	2.10 H	137	27.0	21.8
4	17805.00	37.4 AV	54.0	-16.6	2.10 H	137	15.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.7 PK	74.0	-28.3	1.21 V	210	34.1	11.6
2	11870.00	35.7 AV	54.0	-18.3	1.21 V	210	24.1	11.6
3	17805.00	51.7 PK	74.0	-22.3	2.34 V	250	29.9	21.8
4	17805.00	40.4 AV	54.0	-13.6	2.34 V	250	18.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.0 PK	74.0	-29.0	2.26 H	178	33.5	11.5
2	11910.00	34.0 AV	54.0	-20.0	2.26 H	178	22.5	11.5
3	17865.00	49.3 PK	74.0	-24.7	2.08 H	131	26.1	23.2
4	17865.00	37.7 AV	54.0	-16.3	2.08 H	131	14.5	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.1 PK	74.0	-27.9	1.23 V	199	34.6	11.5
2	11910.00	36.0 AV	54.0	-18.0	1.23 V	199	24.5	11.5
3	17865.00	51.5 PK	74.0	-22.5	2.29 V	238	28.3	23.2
4	17865.00	40.4 AV	54.0	-13.6	2.29 V	238	17.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.9 PK	88.2	-43.3	2.26 H	172	33.0	11.9
2	#12830.00	34.2 AV	68.2	-34.0	2.26 H	172	22.3	11.9
3	19245.00	49.1 PK	74.0	-24.9	2.09 H	140	52.9	-3.8
4	19245.00	37.6 AV	54.0	-16.4	2.09 H	140	41.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.6 PK	88.2	-41.6	1.23 V	192	34.7	11.9
2	#12830.00	36.2 AV	68.2	-32.0	1.23 V	192	24.3	11.9
3	19245.00	50.8 PK	74.0	-23.2	2.31 V	230	54.6	-3.8
4	19245.00	40.0 AV	54.0	-14.0	2.31 V	230	43.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.6 PK	88.2	-43.6	2.24 H	187	32.5	12.1
2	#12870.00	33.6 AV	68.2	-34.6	2.24 H	187	21.5	12.1
3	19305.00	48.4 PK	74.0	-25.6	2.08 H	139	52.1	-3.7
4	19305.00	37.2 AV	54.0	-16.8	2.08 H	139	40.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.2 PK	88.2	-42.0	1.18 V	181	34.1	12.1
2	#12870.00	35.7 AV	68.2	-32.5	1.18 V	181	23.6	12.1
3	19305.00	51.3 PK	74.0	-22.7	2.27 V	212	55.0	-3.7
4	19305.00	40.1 AV	54.0	-13.9	2.27 V	212	43.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.0 PK	88.2	-43.2	2.26 H	187	32.9	12.1
2	#13030.00	34.2 AV	68.2	-34.0	2.26 H	187	22.1	12.1
3	19545.00	48.2 PK	74.0	-25.8	2.13 H	137	52.3	-4.1
4	19545.00	36.8 AV	54.0	-17.2	2.13 H	137	40.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.8 PK	88.2	-42.4	1.15 V	173	33.7	12.1
2	#13030.00	35.8 AV	68.2	-32.4	1.15 V	173	23.7	12.1
3	19545.00	51.4 PK	74.0	-22.6	2.26 V	211	55.5	-4.1
4	19545.00	40.5 AV	54.0	-13.5	2.26 V	211	44.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.1 PK	88.2	-43.1	2.24 H	168	32.7	12.4
2	#13070.00	34.2 AV	68.2	-34.0	2.24 H	168	21.8	12.4
3	19605.00	48.1 PK	74.0	-25.9	2.14 H	151	52.1	-4.0
4	19605.00	36.9 AV	54.0	-17.1	2.14 H	151	40.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.4 PK	88.2	-42.8	1.18 V	173	33.0	12.4
2	#13070.00	35.4 AV	68.2	-32.8	1.18 V	173	23.0	12.4
3	19605.00	50.7 PK	74.0	-23.3	2.32 V	239	54.7	-4.0
4	19605.00	39.8 AV	54.0	-14.2	2.32 V	239	43.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.0 PK	88.2	-43.2	2.18 H	174	31.0	14.0
2	#13750.00	34.3 AV	68.2	-33.9	2.18 H	174	20.3	14.0
3	20625.00	48.2 PK	74.0	-25.8	2.10 H	130	51.5	-3.3
4	20625.00	37.0 AV	54.0	-17.0	2.10 H	130	40.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.0 PK	88.2	-42.2	1.19 V	198	32.0	14.0
2	#13750.00	35.6 AV	68.2	-32.6	1.19 V	198	21.6	14.0
3	20625.00	50.9 PK	74.0	-23.1	2.29 V	219	54.2	-3.3
4	20625.00	39.7 AV	54.0	-14.3	2.29 V	219	43.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.4 PK	88.2	-43.8	2.24 H	166	30.0	14.4
2	#13990.00	33.8 AV	68.2	-34.4	2.24 H	166	19.4	14.4
3	20985.00	49.1 PK	74.0	-24.9	2.13 H	121	51.9	-2.8
4	20985.00	37.7 AV	54.0	-16.3	2.13 H	121	40.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.4 PK	88.2	-42.8	1.19 V	173	31.0	14.4
2	#13990.00	35.4 AV	68.2	-32.8	1.19 V	173	21.0	14.4
3	20985.00	51.4 PK	74.0	-22.6	2.32 V	224	54.2	-2.8
4	20985.00	40.3 AV	54.0	-13.7	2.32 V	224	43.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.9 PK	88.2	-43.3	2.17 H	187	30.7	14.2
2	#14230.00	34.1 AV	68.2	-34.1	2.17 H	187	19.9	14.2
3	21345.00	48.0 PK	74.0	-26.0	2.10 H	125	49.6	-1.6
4	21345.00	36.9 AV	54.0	-17.1	2.10 H	125	38.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.2 PK	88.2	-42.0	1.24 V	177	32.0	14.2
2	#14230.00	36.1 AV	68.2	-32.1	1.24 V	177	21.9	14.2
3	21345.00	51.0 PK	74.0	-23.0	2.28 V	221	52.6	-1.6
4	21345.00	40.1 AV	54.0	-13.9	2.28 V	221	41.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.1 PK	74.0	-28.9	2.19 H	198	33.6	11.5
2	11970.00	34.6 AV	54.0	-19.4	2.19 H	198	23.1	11.5
3	17955.00	48.7 PK	74.0	-25.3	2.07 H	157	23.0	25.7
4	17955.00	37.6 AV	54.0	-16.4	2.07 H	157	11.9	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.6 PK	74.0	-28.4	1.26 V	173	34.1	11.5
2	11970.00	35.2 AV	54.0	-18.8	1.26 V	173	23.7	11.5
3	17955.00	51.9 PK	74.0	-22.1	2.28 V	215	26.2	25.7
4	17955.00	40.4 AV	54.0	-13.6	2.28 V	215	14.7	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	44.1 PK	88.2	-44.1	2.17 H	170	32.5	11.6
2	#12770.00	33.8 AV	68.2	-34.4	2.17 H	170	22.2	11.6
3	19155.00	48.1 PK	74.0	-25.9	2.09 H	149	51.9	-3.8
4	19155.00	36.8 AV	54.0	-17.2	2.09 H	149	40.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	45.7 PK	88.2	-42.5	1.29 V	174	34.1	11.6
2	#12770.00	35.3 AV	68.2	-32.9	1.29 V	174	23.7	11.6
3	19155.00	51.5 PK	74.0	-22.5	2.24 V	209	55.3	-3.8
4	19155.00	40.3 AV	54.0	-13.7	2.24 V	209	44.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	44.2 PK	88.2	-44.0	2.20 H	177	31.9	12.3
2	#12930.00	33.6 AV	68.2	-34.6	2.20 H	177	21.3	12.3
3	19395.00	48.7 PK	74.0	-25.3	2.07 H	137	52.4	-3.7
4	19395.00	37.3 AV	54.0	-16.7	2.07 H	137	41.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	46.0 PK	88.2	-42.2	1.27 V	173	33.7	12.3
2	#12930.00	35.7 AV	68.2	-32.5	1.27 V	173	23.4	12.3
3	19395.00	50.8 PK	74.0	-23.2	2.23 V	210	54.5	-3.7
4	19395.00	39.6 AV	54.0	-14.4	2.23 V	210	43.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	44.5 PK	88.2	-43.7	2.21 H	169	32.1	12.4
2	#13090.00	34.3 AV	68.2	-33.9	2.21 H	169	21.9	12.4
3	19635.00	48.5 PK	74.0	-25.5	2.03 H	141	52.5	-4.0
4	19635.00	37.2 AV	54.0	-16.8	2.03 H	141	41.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	45.7 PK	88.2	-42.5	1.25 V	180	33.3	12.4
2	#13090.00	35.2 AV	68.2	-33.0	1.25 V	180	22.8	12.4
3	19635.00	51.0 PK	74.0	-23.0	2.30 V	209	55.0	-4.0
4	19635.00	40.0 AV	54.0	-14.0	2.30 V	209	44.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	44.5 PK	88.2	-43.7	2.17 H	188	30.5	14.0
2	#13730.00	33.7 AV	68.2	-34.5	2.17 H	188	19.7	14.0
3	20595.00	47.5 PK	74.0	-26.5	2.04 H	129	50.8	-3.3
4	20595.00	36.7 AV	54.0	-17.3	2.04 H	129	40.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	45.5 PK	88.2	-42.7	1.23 V	185	31.5	14.0
2	#13730.00	35.3 AV	68.2	-32.9	1.23 V	185	21.3	14.0
3	20595.00	51.6 PK	74.0	-22.4	2.24 V	203	54.9	-3.3
4	20595.00	40.2 AV	54.0	-13.8	2.24 V	203	43.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	44.8 PK	88.2	-43.4	2.17 H	197	30.6	14.2
2	#13890.00	34.3 AV	68.2	-33.9	2.17 H	197	20.1	14.2
3	20835.00	48.8 PK	74.0	-25.2	2.03 H	153	51.7	-2.9
4	20835.00	37.5 AV	54.0	-16.5	2.03 H	153	40.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	45.7 PK	88.2	-42.5	1.23 V	189	31.5	14.2
2	#13890.00	35.2 AV	68.2	-33.0	1.23 V	189	21.0	14.2
3	20835.00	51.8 PK	74.0	-22.2	2.29 V	204	54.7	-2.9
4	20835.00	40.4 AV	54.0	-13.6	2.29 V	204	43.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	44.8 PK	88.2	-43.4	2.20 H	198	30.1	14.7
2	#14050.00	34.2 AV	68.2	-34.0	2.20 H	198	19.5	14.7
3	21075.00	48.7 PK	74.0	-25.3	2.06 H	150	50.9	-2.2
4	21075.00	37.3 AV	54.0	-16.7	2.06 H	150	39.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	45.6 PK	88.2	-42.6	1.25 V	198	30.9	14.7
2	#14050.00	35.1 AV	68.2	-33.1	1.25 V	198	20.4	14.7
3	21075.00	50.9 PK	74.0	-23.1	2.26 V	207	53.1	-2.2
4	21075.00	39.7 AV	54.0	-14.3	2.26 V	207	41.9	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.8 PK	74.0	-29.2	2.27 H	192	32.9	11.9
2	12050.00	34.1 AV	54.0	-19.9	2.27 H	192	22.2	11.9
3	18075.00	48.2 PK	74.0	-25.8	2.03 H	154	52.9	-4.7
4	18075.00	36.8 AV	54.0	-17.2	2.03 H	154	41.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.1 PK	74.0	-27.9	1.25 V	171	34.2	11.9
2	12050.00	35.9 AV	54.0	-18.1	1.25 V	171	24.0	11.9
3	18075.00	51.1 PK	74.0	-22.9	2.28 V	204	55.8	-4.7
4	18075.00	40.2 AV	54.0	-13.8	2.28 V	204	44.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.6 PK	74.0	-29.4	2.27 H	192	33.1	11.5
2	12690.00	34.0 AV	54.0	-20.0	2.27 H	192	22.5	11.5
3	19035.00	48.7 PK	74.0	-25.3	2.08 H	129	52.6	-3.9
4	19035.00	37.6 AV	54.0	-16.4	2.08 H	129	41.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	46.5 PK	74.0	-27.5	1.30 V	183	35.0	11.5
2	12690.00	36.0 AV	54.0	-18.0	1.30 V	183	24.5	11.5
3	19035.00	51.2 PK	74.0	-22.8	2.30 V	199	55.1	-3.9
4	19035.00	40.2 AV	54.0	-13.8	2.30 V	199	44.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	44.7 PK	88.2	-43.5	2.22 H	188	32.7	12.0
2	#13010.00	34.4 AV	68.2	-33.8	2.22 H	188	22.4	12.0
3	19515.00	47.7 PK	74.0	-26.3	2.08 H	150	51.8	-4.1
4	19515.00	36.8 AV	54.0	-17.2	2.08 H	150	40.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	46.1 PK	88.2	-42.1	1.29 V	175	34.1	12.0
2	#13010.00	35.5 AV	68.2	-32.7	1.29 V	175	23.5	12.0
3	19515.00	51.7 PK	74.0	-22.3	2.32 V	226	55.8	-4.1
4	19515.00	40.6 AV	54.0	-13.4	2.32 V	226	44.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.8 PK	74.0	-29.2	2.28 H	200	31.7	13.1
2	13330.00	34.3 AV	54.0	-19.7	2.28 H	200	21.2	13.1
3	19995.00	48.4 PK	74.0	-25.6	2.06 H	153	52.0	-3.6
4	19995.00	37.3 AV	54.0	-16.7	2.06 H	153	40.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.0 PK	74.0	-28.0	1.22 V	183	32.9	13.1
2	13330.00	35.5 AV	54.0	-18.5	1.22 V	183	22.4	13.1
3	19995.00	50.8 PK	74.0	-23.2	2.31 V	204	54.4	-3.6
4	19995.00	39.8 AV	54.0	-14.2	2.31 V	204	43.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	44.1 PK	88.2	-44.1	2.24 H	195	30.1	14.0
2	#13650.00	33.8 AV	68.2	-34.4	2.24 H	195	19.8	14.0
3	20475.00	48.2 PK	74.0	-25.8	2.09 H	130	51.4	-3.2
4	20475.00	37.0 AV	54.0	-17.0	2.09 H	130	40.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.0 PK	88.2	-42.2	1.24 V	186	32.0	14.0
2	#13650.00	35.6 AV	68.2	-32.6	1.24 V	186	21.6	14.0
3	20475.00	51.4 PK	74.0	-22.6	2.26 V	214	54.6	-3.2
4	20475.00	40.0 AV	54.0	-14.0	2.26 V	214	43.2	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.6 PK	88.2	-43.6	2.24 H	182	30.2	14.4
2	#13970.00	33.9 AV	68.2	-34.3	2.24 H	182	19.5	14.4
3	20955.00	48.1 PK	74.0	-25.9	2.12 H	149	50.8	-2.7
4	20955.00	36.9 AV	54.0	-17.1	2.12 H	149	39.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	45.5 PK	88.2	-42.7	1.22 V	178	31.1	14.4
2	#13970.00	35.3 AV	68.2	-32.9	1.22 V	178	20.9	14.4
3	20955.00	51.3 PK	74.0	-22.7	2.30 V	204	54.0	-2.7
4	20955.00	40.0 AV	54.0	-14.0	2.30 V	204	42.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.7 PK	74.0	-29.3	2.24 H	194	32.8	11.9
2	12050.00	34.0 AV	54.0	-20.0	2.24 H	194	22.1	11.9
3	18075.00	48.6 PK	74.0	-25.4	2.11 H	136	53.3	-4.7
4	18075.00	37.2 AV	54.0	-16.8	2.11 H	136	41.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	45.5 PK	74.0	-28.5	1.24 V	183	33.6	11.9
2	12050.00	35.0 AV	54.0	-19.0	1.24 V	183	23.1	11.9
3	18075.00	51.5 PK	74.0	-22.5	2.23 V	199	56.2	-4.7
4	18075.00	40.2 AV	54.0	-13.8	2.23 V	199	44.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.6 PK	74.0	-29.4	2.25 H	187	33.1	11.5
2	12690.00	33.8 AV	54.0	-20.2	2.25 H	187	22.3	11.5
3	19035.00	48.0 PK	74.0	-26.0	2.03 H	147	51.9	-3.9
4	19035.00	36.9 AV	54.0	-17.1	2.03 H	147	40.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.5 PK	74.0	-28.5	1.22 V	198	34.0	11.5
2	12690.00	35.0 AV	54.0	-19.0	1.22 V	198	23.5	11.5
3	19035.00	51.4 PK	74.0	-22.6	2.30 V	201	55.3	-3.9
4	19035.00	40.4 AV	54.0	-13.6	2.30 V	201	44.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	44.6 PK	88.2	-43.6	2.17 H	181	32.6	12.0
2	#13010.00	34.2 AV	68.2	-34.0	2.17 H	181	22.2	12.0
3	19515.00	48.5 PK	74.0	-25.5	2.04 H	155	52.6	-4.1
4	19515.00	37.6 AV	54.0	-16.4	2.04 H	155	41.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	46.1 PK	88.2	-42.1	1.28 V	199	34.1	12.0
2	#13010.00	35.9 AV	68.2	-32.3	1.28 V	199	23.9	12.0
3	19515.00	51.1 PK	74.0	-22.9	2.29 V	206	55.2	-4.1
4	19515.00	39.8 AV	54.0	-14.2	2.29 V	206	43.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.7 PK	74.0	-29.3	2.22 H	197	31.6	13.1
2	13330.00	34.1 AV	54.0	-19.9	2.22 H	197	21.0	13.1
3	19995.00	49.1 PK	74.0	-24.9	2.09 H	154	52.7	-3.6
4	19995.00	37.7 AV	54.0	-16.3	2.09 H	154	41.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.7 PK	74.0	-28.3	1.23 V	173	32.6	13.1
2	13330.00	35.6 AV	54.0	-18.4	1.23 V	173	22.5	13.1
3	19995.00	51.1 PK	74.0	-22.9	2.22 V	227	54.7	-3.6
4	19995.00	39.7 AV	54.0	-14.3	2.22 V	227	43.3	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	44.0 PK	88.2	-44.2	2.18 H	191	30.0	14.0
2	#13650.00	33.8 AV	68.2	-34.4	2.18 H	191	19.8	14.0
3	20475.00	48.0 PK	74.0	-26.0	2.02 H	129	51.2	-3.2
4	20475.00	36.9 AV	54.0	-17.1	2.02 H	129	40.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	45.8 PK	88.2	-42.4	1.25 V	203	31.8	14.0
2	#13650.00	35.8 AV	68.2	-32.4	1.25 V	203	21.8	14.0
3	20475.00	51.5 PK	74.0	-22.5	2.29 V	207	54.7	-3.2
4	20475.00	40.0 AV	54.0	-14.0	2.29 V	207	43.2	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.1 PK	88.2	-44.1	2.18 H	198	29.7	14.4
2	#13970.00	33.8 AV	68.2	-34.4	2.18 H	198	19.4	14.4
3	20955.00	48.2 PK	74.0	-25.8	2.11 H	146	50.9	-2.7
4	20955.00	37.3 AV	54.0	-16.7	2.11 H	146	40.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	45.5 PK	88.2	-42.7	1.31 V	197	31.1	14.4
2	#13970.00	35.4 AV	68.2	-32.8	1.31 V	197	21.0	14.4
3	20955.00	51.5 PK	74.0	-22.5	2.28 V	217	54.2	-2.7
4	20955.00	40.0 AV	54.0	-14.0	2.28 V	217	42.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

2TX

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.8 PK	74.0	-28.2	2.11 H	224	34.2	11.6
2	11870.00	35.1 AV	54.0	-18.9	2.11 H	224	23.5	11.6
3	17805.00	53.9 PK	74.0	-20.1	3.16 H	136	32.1	21.8
4	17805.00	42.1 AV	54.0	-11.9	3.16 H	136	20.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.3 PK	74.0	-24.7	1.10 V	174	37.7	11.6
2	11870.00	38.1 AV	54.0	-15.9	1.10 V	174	26.5	11.6
3	17850.00	55.1 PK	74.0	-18.9	2.15 V	220	32.2	22.9
4	17850.00	41.8 AV	54.0	-12.2	2.15 V	220	18.9	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.3 PK	74.0	-27.7	2.14 H	222	34.8	11.5
2	11910.00	35.7 AV	54.0	-18.3	2.14 H	222	24.2	11.5
3	17865.00	53.9 PK	74.0	-20.1	3.14 H	147	30.7	23.2
4	17865.00	42.1 AV	54.0	-11.9	3.14 H	147	18.9	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.9 PK	74.0	-25.1	1.14 V	158	37.4	11.5
2	11910.00	37.6 AV	54.0	-16.4	1.14 V	158	26.1	11.5
3	17865.00	54.8 PK	74.0	-19.2	2.16 V	221	31.6	23.2
4	17865.00	41.7 AV	54.0	-12.3	2.16 V	221	18.5	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.7 PK	74.0	-27.3	2.10 H	208	34.6	12.1
2	12350.00	36.0 AV	54.0	-18.0	2.10 H	208	23.9	12.1
3	18525.00	54.2 PK	74.0	-19.8	3.20 H	149	58.1	-3.9
4	18525.00	42.3 AV	54.0	-11.7	3.20 H	149	46.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.0 PK	74.0	-25.0	1.13 V	162	36.9	12.1
2	12350.00	37.7 AV	54.0	-16.3	1.13 V	162	25.6	12.1
3	18525.00	54.7 PK	74.0	-19.3	2.21 V	237	58.6	-3.9
4	18525.00	41.9 AV	54.0	-12.1	2.21 V	237	45.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.1 PK	88.2	-41.1	2.16 H	223	35.2	11.9
2	#12830.00	36.2 AV	68.2	-32.0	2.16 H	223	24.3	11.9
3	19245.00	53.8 PK	74.0	-20.2	3.18 H	143	57.7	-3.9
4	19245.00	41.7 AV	54.0	-12.3	3.18 H	143	45.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.0 PK	88.2	-39.2	1.13 V	174	37.1	11.9
2	#12830.00	37.5 AV	68.2	-30.7	1.13 V	174	25.6	11.9
3	19245.00	54.3 PK	74.0	-19.7	2.11 V	216	58.2	-3.9
4	19245.00	41.4 AV	54.0	-12.6	2.11 V	216	45.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.6 PK	88.2	-41.6	2.10 H	219	34.5	12.1
2	#12870.00	36.0 AV	68.2	-32.2	2.10 H	219	23.9	12.1
3	19305.00	53.6 PK	74.0	-20.4	3.14 H	159	57.4	-3.8
4	19305.00	42.0 AV	54.0	-12.0	3.14 H	159	45.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	1.09 V	167	36.4	12.1
2	#12870.00	37.4 AV	68.2	-30.8	1.09 V	167	25.3	12.1
3	19305.00	55.1 PK	74.0	-18.9	2.18 V	230	58.9	-3.8
4	19305.00	41.7 AV	54.0	-12.3	2.18 V	230	45.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.4 PK	88.2	-41.8	2.16 H	224	34.3	12.1
2	#12950.00	35.9 AV	68.2	-32.3	2.16 H	224	23.8	12.1
3	19425.00	53.9 PK	74.0	-20.1	3.15 H	141	57.7	-3.8
4	19425.00	41.9 AV	54.0	-12.1	3.15 H	141	45.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.9 PK	88.2	-39.3	1.12 V	152	36.8	12.1
2	#12950.00	37.8 AV	68.2	-30.4	1.12 V	152	25.7	12.1
3	19425.00	54.9 PK	74.0	-19.1	2.16 V	219	58.7	-3.8
4	19425.00	41.6 AV	54.0	-12.4	2.16 V	219	45.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	45.9 PK	88.2	-42.3	2.09 H	231	33.8	12.1
2	#13030.00	35.2 AV	68.2	-33.0	2.09 H	231	23.1	12.1
3	19545.00	53.7 PK	74.0	-20.3	3.09 H	149	57.5	-3.8
4	19545.00	42.1 AV	54.0	-11.9	3.09 H	149	45.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.9 PK	88.2	-39.3	1.18 V	147	36.8	12.1
2	#13030.00	37.5 AV	68.2	-30.7	1.18 V	147	25.4	12.1
3	19545.00	54.3 PK	74.0	-19.7	2.18 V	233	58.1	-3.8
4	19545.00	41.3 AV	54.0	-12.7	2.18 V	233	45.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.9 PK	88.2	-41.3	2.13 H	226	34.5	12.4
2	#13070.00	36.0 AV	68.2	-32.2	2.13 H	226	23.6	12.4
3	19605.00	53.6 PK	74.0	-20.4	3.09 H	140	57.2	-3.6
4	19605.00	41.9 AV	54.0	-12.1	3.09 H	140	45.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.4 PK	88.2	-38.8	1.12 V	167	37.0	12.4
2	#13070.00	37.9 AV	68.2	-30.3	1.12 V	167	25.5	12.4
3	19605.00	55.1 PK	74.0	-18.9	2.19 V	216	58.7	-3.6
4	19605.00	41.8 AV	54.0	-12.2	2.19 V	216	45.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	46.7 PK	74.0	-27.3	2.12 H	228	33.5	13.2
2	13390.00	36.0 AV	54.0	-18.0	2.12 H	228	22.8	13.2
3	20085.00	53.9 PK	74.0	-20.1	3.19 H	134	57.2	-3.3
4	20085.00	42.4 AV	54.0	-11.6	3.19 H	134	45.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.0 PK	74.0	-25.0	1.15 V	165	35.8	13.2
2	13390.00	37.6 AV	54.0	-16.4	1.15 V	165	24.4	13.2
3	20085.00	54.6 PK	74.0	-19.4	2.16 V	214	57.9	-3.3
4	20085.00	41.5 AV	54.0	-12.5	2.16 V	214	44.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.2 PK	88.2	-42.0	2.15 H	214	32.1	14.1
2	#13710.00	35.8 AV	68.2	-32.4	2.15 H	214	21.7	14.1
3	20565.00	53.7 PK	74.0	-20.3	3.15 H	158	56.6	-2.9
4	20565.00	42.2 AV	54.0	-11.8	3.15 H	158	45.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.2 PK	88.2	-39.0	1.11 V	155	35.1	14.1
2	#13710.00	37.8 AV	68.2	-30.4	1.11 V	155	23.7	14.1
3	20565.00	54.7 PK	74.0	-19.3	2.19 V	213	57.6	-2.9
4	20565.00	41.7 AV	54.0	-12.3	2.19 V	213	44.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.6 PK	88.2	-41.6	2.12 H	212	32.6	14.0
2	#13750.00	35.8 AV	68.2	-32.4	2.12 H	212	21.8	14.0
3	20625.00	53.5 PK	74.0	-20.5	3.12 H	151	56.3	-2.8
4	20625.00	42.0 AV	54.0	-12.0	3.12 H	151	44.8	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.6 PK	88.2	-39.6	1.09 V	172	34.6	14.0
2	#13750.00	37.4 AV	68.2	-30.8	1.09 V	172	23.4	14.0
3	20625.00	54.6 PK	74.0	-19.4	2.15 V	234	57.4	-2.8
4	20625.00	41.3 AV	54.0	-12.7	2.15 V	234	44.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.8 PK	88.2	-42.4	2.19 H	232	31.4	14.4
2	#13990.00	35.4 AV	68.2	-32.8	2.19 H	232	21.0	14.4
3	20985.00	54.1 PK	74.0	-19.9	3.16 H	138	56.5	-2.4
4	20985.00	42.3 AV	54.0	-11.7	3.16 H	138	44.7	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.6 PK	88.2	-39.6	1.12 V	157	34.2	14.4
2	#13990.00	37.6 AV	68.2	-30.6	1.12 V	157	23.2	14.4
3	20985.00	54.6 PK	74.0	-19.4	2.13 V	214	57.0	-2.4
4	20985.00	41.2 AV	54.0	-12.8	2.13 V	214	43.6	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.3 PK	88.2	-41.9	2.14 H	233	32.1	14.2
2	#14230.00	35.9 AV	68.2	-32.3	2.14 H	233	21.7	14.2
3	21345.00	53.9 PK	74.0	-20.1	3.09 H	143	55.3	-1.4
4	21345.00	41.9 AV	54.0	-12.1	3.09 H	143	43.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.3 PK	88.2	-38.9	1.16 V	169	35.1	14.2
2	#14230.00	37.8 AV	68.2	-30.4	1.16 V	169	23.6	14.2
3	21345.00	55.4 PK	74.0	-18.6	2.21 V	218	56.8	-1.4
4	21345.00	42.2 AV	54.0	-11.8	2.21 V	218	43.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.1 PK	74.0	-28.9	2.14 H	225	33.5	11.6
2	11870.00	34.9 AV	54.0	-19.1	2.14 H	225	23.3	11.6
3	17805.00	53.8 PK	74.0	-20.2	3.19 H	169	32.0	21.8
4	17805.00	42.1 AV	54.0	-11.9	3.19 H	169	20.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	48.8 PK	74.0	-25.2	1.13 V	172	37.2	11.6
2	11870.00	37.2 AV	54.0	-16.8	1.13 V	172	25.6	11.6
3	17805.00	56.3 PK	74.0	-17.7	2.29 V	212	34.5	21.8
4	17805.00	42.8 AV	54.0	-11.2	2.29 V	212	21.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.6 PK	74.0	-28.4	2.13 H	223	34.1	11.5
2	11910.00	35.2 AV	54.0	-18.8	2.13 H	223	23.7	11.5
3	17865.00	54.1 PK	74.0	-19.9	3.18 H	160	30.9	23.2
4	17865.00	42.2 AV	54.0	-11.8	3.18 H	160	19.0	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.4 PK	74.0	-24.6	1.18 V	179	37.9	11.5
2	11910.00	37.6 AV	54.0	-16.4	1.18 V	179	26.1	11.5
3	17865.00	56.0 PK	74.0	-18.0	2.24 V	220	32.8	23.2
4	17865.00	42.7 AV	54.0	-11.3	2.24 V	220	19.5	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.1 PK	74.0	-27.9	2.13 H	232	34.0	12.1
2	12350.00	35.6 AV	54.0	-18.4	2.13 H	232	23.5	12.1
3	18525.00	53.9 PK	74.0	-20.1	3.11 H	131	57.8	-3.9
4	18525.00	42.1 AV	54.0	-11.9	3.11 H	131	46.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.7 PK	74.0	-24.3	1.17 V	172	37.6	12.1
2	12350.00	38.3 AV	54.0	-15.7	1.17 V	172	26.2	12.1
3	18525.00	55.2 PK	74.0	-18.8	2.17 V	218	59.1	-3.9
4	18525.00	41.8 AV	54.0	-12.2	2.17 V	218	45.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.7 PK	88.2	-41.5	2.12 H	235	34.8	11.9
2	#12830.00	35.9 AV	68.2	-32.3	2.12 H	235	24.0	11.9
3	19245.00	54.4 PK	74.0	-19.6	3.18 H	158	58.3	-3.9
4	19245.00	42.5 AV	54.0	-11.5	3.18 H	158	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.6 PK	88.2	-38.6	1.19 V	178	37.7	11.9
2	#12830.00	37.9 AV	68.2	-30.3	1.19 V	178	26.0	11.9
3	19245.00	55.2 PK	74.0	-18.8	2.27 V	234	59.1	-3.9
4	19245.00	42.2 AV	54.0	-11.8	2.27 V	234	46.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.9 PK	88.2	-42.3	2.16 H	215	33.8	12.1
2	#12870.00	35.5 AV	68.2	-32.7	2.16 H	215	23.4	12.1
3	19305.00	53.8 PK	74.0	-20.2	3.09 H	143	57.6	-3.8
4	19305.00	42.1 AV	54.0	-11.9	3.09 H	143	45.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.5 PK	88.2	-38.7	1.19 V	167	37.4	12.1
2	#12870.00	38.2 AV	68.2	-30.0	1.19 V	167	26.1	12.1
3	19305.00	54.8 PK	74.0	-19.2	2.18 V	229	58.6	-3.8
4	19305.00	41.8 AV	54.0	-12.2	2.18 V	229	45.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	46.3 PK	88.2	-41.9	2.19 H	208	34.2	12.1
2	#12950.00	35.6 AV	68.2	-32.6	2.19 H	208	23.5	12.1
3	19425.00	54.0 PK	74.0	-20.0	3.11 H	163	57.8	-3.8
4	19425.00	42.3 AV	54.0	-11.7	3.11 H	163	46.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.4 PK	88.2	-38.8	1.19 V	174	37.3	12.1
2	#12950.00	38.0 AV	68.2	-30.2	1.19 V	174	25.9	12.1
3	19425.00	55.0 PK	74.0	-19.0	2.22 V	221	58.8	-3.8
4	19425.00	41.8 AV	54.0	-12.2	2.22 V	221	45.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.0 PK	88.2	-42.2	2.16 H	210	33.9	12.1
2	#13030.00	35.5 AV	68.2	-32.7	2.16 H	210	23.4	12.1
3	19545.00	54.4 PK	74.0	-19.6	3.17 H	140	58.2	-3.8
4	19545.00	42.4 AV	54.0	-11.6	3.17 H	140	46.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.5 PK	88.2	-38.7	1.18 V	184	37.4	12.1
2	#13030.00	38.0 AV	68.2	-30.2	1.18 V	184	25.9	12.1
3	19545.00	55.6 PK	74.0	-18.4	2.24 V	221	59.4	-3.8
4	19545.00	42.3 AV	54.0	-11.7	2.24 V	221	46.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.1 PK	88.2	-41.1	2.14 H	207	34.7	12.4
2	#13070.00	36.2 AV	68.2	-32.0	2.14 H	207	23.8	12.4
3	19605.00	53.4 PK	74.0	-20.6	3.10 H	137	57.0	-3.6
4	19605.00	41.6 AV	54.0	-12.4	3.10 H	137	45.2	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	49.5 PK	88.2	-38.7	1.11 V	172	37.1	12.4
2	#13070.00	37.8 AV	68.2	-30.4	1.11 V	172	25.4	12.4
3	19605.00	55.3 PK	74.0	-18.7	2.20 V	221	58.9	-3.6
4	19605.00	41.8 AV	54.0	-12.2	2.20 V	221	45.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	45.6 PK	74.0	-28.4	2.11 H	236	32.4	13.2
2	13390.00	35.2 AV	54.0	-18.8	2.11 H	236	22.0	13.2
3	20085.00	54.2 PK	74.0	-19.8	3.17 H	132	57.5	-3.3
4	20085.00	42.9 AV	54.0	-11.1	3.17 H	132	46.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.2 PK	74.0	-24.8	1.11 V	179	36.0	13.2
2	13390.00	37.9 AV	54.0	-16.1	1.11 V	179	24.7	13.2
3	20085.00	55.5 PK	74.0	-18.5	2.21 V	229	58.8	-3.3
4	20085.00	42.4 AV	54.0	-11.6	2.21 V	229	45.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.4 PK	88.2	-42.8	2.13 H	249	31.3	14.1
2	#13710.00	35.0 AV	68.2	-33.2	2.13 H	249	20.9	14.1
3	20565.00	54.8 PK	74.0	-19.2	3.16 H	119	57.7	-2.9
4	20565.00	43.2 AV	54.0	-10.8	3.16 H	119	46.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.0 PK	88.2	-39.2	1.05 V	165	34.9	14.1
2	#13710.00	37.5 AV	68.2	-30.7	1.05 V	165	23.4	14.1
3	20565.00	55.9 PK	74.0	-18.1	2.17 V	234	58.8	-2.9
4	20565.00	42.8 AV	54.0	-11.2	2.17 V	234	45.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.9 PK	88.2	-42.3	2.05 H	247	31.9	14.0
2	#13750.00	35.5 AV	68.2	-32.7	2.05 H	247	21.5	14.0
3	20625.00	54.2 PK	74.0	-19.8	3.18 H	144	57.0	-2.8
4	20625.00	42.7 AV	54.0	-11.3	3.18 H	144	45.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.5 PK	88.2	-38.7	1.18 V	156	35.5	14.0
2	#13750.00	37.8 AV	68.2	-30.4	1.18 V	156	23.8	14.0
3	20625.00	55.2 PK	74.0	-18.8	2.23 V	211	58.0	-2.8
4	20625.00	42.1 AV	54.0	-11.9	2.23 V	211	44.9	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	45.5 PK	88.2	-42.7	2.06 H	249	31.1	14.4
2	#13990.00	34.8 AV	68.2	-33.4	2.06 H	249	20.4	14.4
3	20985.00	54.6 PK	74.0	-19.4	3.11 H	132	57.0	-2.4
4	20985.00	42.3 AV	54.0	-11.7	3.11 H	132	44.7	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.8 PK	88.2	-38.4	1.18 V	180	35.4	14.4
2	#13990.00	38.1 AV	68.2	-30.1	1.18 V	180	23.7	14.4
3	20985.00	55.8 PK	74.0	-18.2	2.21 V	211	58.2	-2.4
4	20985.00	42.6 AV	54.0	-11.4	2.21 V	211	45.0	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.7 PK	88.2	-42.5	2.08 H	245	31.5	14.2
2	#14230.00	35.6 AV	68.2	-32.6	2.08 H	245	21.4	14.2
3	21345.00	54.1 PK	74.0	-19.9	3.13 H	142	55.5	-1.4
4	21345.00	42.5 AV	54.0	-11.5	3.13 H	142	43.9	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.0 PK	88.2	-39.2	1.13 V	154	34.8	14.2
2	#14230.00	37.5 AV	68.2	-30.7	1.13 V	154	23.3	14.2
3	21345.00	55.1 PK	74.0	-18.9	2.27 V	217	56.5	-1.4
4	21345.00	41.9 AV	54.0	-12.1	2.27 V	217	43.3	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	46.0 PK	74.0	-28.0	2.17 H	236	34.5	11.5
2	11930.00	35.6 AV	54.0	-18.4	2.17 H	236	24.1	11.5
3	17895.00	53.1 PK	74.0	-20.9	3.12 H	137	29.2	23.9
4	17895.00	42.5 AV	54.0	-11.5	3.12 H	137	18.6	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.0 PK	74.0	-26.0	2.25 V	156	36.5	11.5
2	11930.00	37.9 AV	54.0	-16.1	2.25 V	156	26.4	11.5
3	17895.00	54.3 PK	74.0	-19.7	3.00 V	147	30.4	23.9
4	17895.00	41.0 AV	54.0	-13.0	3.00 V	147	17.1	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	45.7 PK	74.0	-28.3	2.11 H	243	33.4	12.3
2	12330.00	35.3 AV	54.0	-18.7	2.11 H	243	23.0	12.3
3	18495.00	53.3 PK	74.0	-20.7	3.10 H	137	57.2	-3.9
4	18495.00	42.7 AV	54.0	-11.3	3.10 H	137	46.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.2 PK	74.0	-25.8	2.26 V	144	35.9	12.3
2	12330.00	38.3 AV	54.0	-15.7	2.26 V	144	26.0	12.3
3	18495.00	54.3 PK	74.0	-19.7	3.03 V	160	58.2	-3.9
4	18495.00	40.8 AV	54.0	-13.2	3.03 V	160	44.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	45.0 PK	88.2	-43.2	2.14 H	231	33.3	11.7
2	#12810.00	34.8 AV	68.2	-33.4	2.14 H	231	23.1	11.7
3	19215.00	53.1 PK	74.0	-20.9	3.07 H	148	57.0	-3.9
4	19215.00	42.7 AV	54.0	-11.3	3.07 H	148	46.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.1 PK	88.2	-40.1	2.27 V	154	36.4	11.7
2	#12810.00	37.9 AV	68.2	-30.3	2.27 V	154	26.2	11.7
3	19215.00	54.7 PK	74.0	-19.3	3.06 V	157	58.6	-3.9
4	19215.00	41.0 AV	54.0	-13.0	3.06 V	157	44.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	45.3 PK	88.2	-42.9	2.10 H	241	33.0	12.3
2	#12890.00	35.2 AV	68.2	-33.0	2.10 H	241	22.9	12.3
3	19335.00	53.1 PK	74.0	-20.9	3.15 H	151	56.9	-3.8
4	19335.00	42.3 AV	54.0	-11.7	3.15 H	151	46.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	48.8 PK	88.2	-39.4	2.30 V	152	36.5	12.3
2	#12890.00	38.7 AV	68.2	-29.5	2.30 V	152	26.4	12.3
3	19335.00	54.5 PK	74.0	-19.5	3.08 V	155	58.3	-3.8
4	19335.00	40.9 AV	54.0	-13.1	3.08 V	155	44.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	46.1 PK	88.2	-42.1	2.08 H	233	34.0	12.1
2	#12970.00	35.6 AV	68.2	-32.6	2.08 H	233	23.5	12.1
3	19455.00	53.4 PK	74.0	-20.6	3.17 H	127	57.3	-3.9
4	19455.00	42.5 AV	54.0	-11.5	3.17 H	127	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	47.9 PK	88.2	-40.3	2.27 V	132	35.8	12.1
2	#12970.00	38.3 AV	68.2	-29.9	2.27 V	132	26.2	12.1
3	19455.00	54.3 PK	74.0	-19.7	2.97 V	156	58.2	-3.9
4	19455.00	41.1 AV	54.0	-12.9	2.97 V	156	45.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	45.5 PK	88.2	-42.7	2.05 H	245	33.2	12.3
2	#13050.00	35.0 AV	68.2	-33.2	2.05 H	245	22.7	12.3
3	19575.00	52.4 PK	74.0	-21.6	3.07 H	145	56.1	-3.7
4	19575.00	42.0 AV	54.0	-12.0	3.07 H	145	45.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	47.8 PK	88.2	-40.4	2.29 V	155	35.5	12.3
2	#13050.00	38.2 AV	68.2	-30.0	2.29 V	155	25.9	12.3
3	19575.00	54.5 PK	74.0	-19.5	3.04 V	170	58.2	-3.7
4	19575.00	40.9 AV	54.0	-13.1	3.04 V	170	44.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	45.8 PK	88.2	-42.4	2.11 H	249	33.2	12.6
2	#13130.00	35.5 AV	68.2	-32.7	2.11 H	249	22.9	12.6
3	19695.00	52.7 PK	74.0	-21.3	3.12 H	147	56.2	-3.5
4	19695.00	42.1 AV	54.0	-11.9	3.12 H	147	45.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.4 PK	88.2	-39.8	2.29 V	138	35.8	12.6
2	#13130.00	38.7 AV	68.2	-29.5	2.29 V	138	26.1	12.6
3	19695.00	54.8 PK	74.0	-19.2	2.97 V	159	58.3	-3.5
4	19695.00	41.3 AV	54.0	-12.7	2.97 V	159	44.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	45.4 PK	88.2	-42.8	2.11 H	227	32.0	13.4
2	#13450.00	35.0 AV	68.2	-33.2	2.11 H	227	21.6	13.4
3	20175.00	52.9 PK	74.0	-21.1	3.08 H	127	56.1	-3.2
4	20175.00	42.5 AV	54.0	-11.5	3.08 H	127	45.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.3 PK	88.2	-39.9	2.21 V	149	34.9	13.4
2	#13450.00	38.6 AV	68.2	-29.6	2.21 V	149	25.2	13.4
3	20175.00	53.9 PK	74.0	-20.1	3.08 V	163	57.1	-3.2
4	20175.00	40.7 AV	54.0	-13.3	3.08 V	163	43.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	45.6 PK	88.2	-42.6	2.13 H	224	31.4	14.2
2	#13690.00	35.2 AV	68.2	-33.0	2.13 H	224	21.0	14.2
3	20535.00	53.8 PK	74.0	-20.2	3.16 H	134	56.7	-2.9
4	20535.00	42.3 AV	54.0	-11.7	3.16 H	134	45.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	47.7 PK	88.2	-40.5	2.23 V	138	33.5	14.2
2	#13690.00	37.9 AV	68.2	-30.3	2.23 V	138	23.7	14.2
3	20535.00	55.0 PK	74.0	-19.0	3.01 V	167	57.9	-2.9
4	20535.00	41.3 AV	54.0	-12.7	3.01 V	167	44.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	46.1 PK	88.2	-42.1	2.14 H	221	32.1	14.0
2	#13770.00	35.5 AV	68.2	-32.7	2.14 H	221	21.5	14.0
3	20655.00	53.9 PK	74.0	-20.1	3.12 H	122	56.7	-2.8
4	20655.00	42.4 AV	54.0	-11.6	3.12 H	122	45.2	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	47.9 PK	88.2	-40.3	2.25 V	134	33.9	14.0
2	#13770.00	37.9 AV	68.2	-30.3	2.25 V	134	23.9	14.0
3	20655.00	53.8 PK	74.0	-20.2	3.04 V	176	56.6	-2.8
4	20655.00	40.5 AV	54.0	-13.5	3.04 V	176	43.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	45.6 PK	88.2	-42.6	2.17 H	232	31.0	14.6
2	#14010.00	35.1 AV	68.2	-33.1	2.17 H	232	20.5	14.6
3	21015.00	52.9 PK	74.0	-21.1	3.14 H	130	55.2	-2.3
4	21015.00	42.5 AV	54.0	-11.5	3.14 H	130	44.8	-2.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.4 PK	88.2	-39.8	2.26 V	136	33.8	14.6
2	#14010.00	38.5 AV	68.2	-29.7	2.26 V	136	23.9	14.6
3	21015.00	54.4 PK	74.0	-19.6	2.98 V	166	56.7	-2.3
4	21015.00	40.9 AV	54.0	-13.1	2.98 V	166	43.2	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	45.9 PK	88.2	-42.3	2.11 H	252	31.5	14.4
2	#14170.00	35.5 AV	68.2	-32.7	2.11 H	252	21.1	14.4
3	21255.00	52.9 PK	74.0	-21.1	3.13 H	130	54.1	-1.2
4	21255.00	42.6 AV	54.0	-11.4	3.13 H	130	43.8	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.7 PK	88.2	-39.5	2.29 V	156	34.3	14.4
2	#14170.00	38.6 AV	68.2	-29.6	2.29 V	156	24.2	14.4
3	21255.00	54.1 PK	74.0	-19.9	3.00 V	156	55.3	-1.2
4	21255.00	40.9 AV	54.0	-13.1	3.00 V	156	42.1	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	43.8 PK	74.0	-30.2	2.16 H	156	32.3	11.5
2	11970.00	33.4 AV	54.0	-20.6	2.16 H	156	21.9	11.5
3	17955.00	48.7 PK	74.0	-25.3	2.15 H	136	23.0	25.7
4	17955.00	37.2 AV	54.0	-16.8	2.15 H	136	11.5	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	46.5 PK	74.0	-27.5	1.16 V	179	35.0	11.5
2	11970.00	36.2 AV	54.0	-17.8	1.16 V	179	24.7	11.5
3	17955.00	51.6 PK	74.0	-22.4	2.27 V	226	25.9	25.7
4	17955.00	40.7 AV	54.0	-13.3	2.27 V	226	15.0	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	44.1 PK	74.0	-29.9	2.17 H	149	31.7	12.4
2	12290.00	33.9 AV	54.0	-20.1	2.17 H	149	21.5	12.4
3	18435.00	48.8 PK	74.0	-25.2	2.11 H	130	52.9	-4.1
4	18435.00	37.4 AV	54.0	-16.6	2.11 H	130	41.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	45.9 PK	74.0	-28.1	1.12 V	182	33.5	12.4
2	12290.00	35.8 AV	54.0	-18.2	1.12 V	182	23.4	12.4
3	18435.00	51.3 PK	74.0	-22.7	2.26 V	238	55.4	-4.1
4	18435.00	40.3 AV	54.0	-13.7	2.26 V	238	44.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	43.5 PK	88.2	-44.7	2.11 H	143	31.9	11.6
2	#12770.00	33.3 AV	68.2	-34.9	2.11 H	143	21.7	11.6
3	19155.00	48.5 PK	74.0	-25.5	2.13 H	143	52.4	-3.9
4	19155.00	37.2 AV	54.0	-16.8	2.13 H	143	41.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.2 PK	88.2	-42.0	1.21 V	185	34.6	11.6
2	#12770.00	36.1 AV	68.2	-32.1	1.21 V	185	24.5	11.6
3	19155.00	51.8 PK	74.0	-22.2	2.25 V	235	55.7	-3.9
4	19155.00	40.6 AV	54.0	-13.4	2.25 V	235	44.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	44.0 PK	88.2	-44.2	2.14 H	152	31.7	12.3
2	#12930.00	33.8 AV	68.2	-34.4	2.14 H	152	21.5	12.3
3	19395.00	49.2 PK	74.0	-24.8	2.19 H	139	53.0	-3.8
4	19395.00	37.7 AV	54.0	-16.3	2.19 H	139	41.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.0 PK	88.2	-41.2	1.16 V	170	34.7	12.3
2	#12930.00	36.5 AV	68.2	-31.7	1.16 V	170	24.2	12.3
3	19395.00	51.2 PK	74.0	-22.8	2.26 V	235	55.0	-3.8
4	19395.00	40.5 AV	54.0	-13.5	2.26 V	235	44.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	44.3 PK	88.2	-43.9	2.10 H	159	31.9	12.4
2	#13090.00	33.6 AV	68.2	-34.6	2.10 H	159	21.2	12.4
3	19635.00	48.6 PK	74.0	-25.4	2.12 H	150	52.1	-3.5
4	19635.00	36.9 AV	54.0	-17.1	2.12 H	150	40.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	47.2 PK	88.2	-41.0	1.14 V	188	34.8	12.4
2	#13090.00	36.6 AV	68.2	-31.6	1.14 V	188	24.2	12.4
3	19635.00	51.0 PK	74.0	-23.0	2.26 V	233	54.5	-3.5
4	19635.00	40.4 AV	54.0	-13.6	2.26 V	233	43.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	43.2 PK	88.2	-45.0	2.12 H	143	29.9	13.3
2	#13410.00	33.0 AV	68.2	-35.2	2.12 H	143	19.7	13.3
3	20115.00	49.0 PK	74.0	-25.0	2.16 H	132	52.3	-3.3
4	20115.00	37.6 AV	54.0	-16.4	2.16 H	132	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	46.8 PK	88.2	-41.4	1.12 V	166	33.5	13.3
2	#13410.00	36.4 AV	68.2	-31.8	1.12 V	166	23.1	13.3
3	20115.00	51.4 PK	74.0	-22.6	2.24 V	219	54.7	-3.3
4	20115.00	40.4 AV	54.0	-13.6	2.24 V	219	43.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	43.9 PK	88.2	-44.3	2.15 H	157	29.9	14.0
2	#13730.00	33.7 AV	68.2	-34.5	2.15 H	157	19.7	14.0
3	20595.00	49.2 PK	74.0	-24.8	2.15 H	136	52.1	-2.9
4	20595.00	37.5 AV	54.0	-16.5	2.15 H	136	40.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	46.1 PK	88.2	-42.1	1.10 V	171	32.1	14.0
2	#13730.00	36.0 AV	68.2	-32.2	1.10 V	171	22.0	14.0
3	20595.00	51.6 PK	74.0	-22.4	2.31 V	238	54.5	-2.9
4	20595.00	40.7 AV	54.0	-13.3	2.31 V	238	43.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	44.1 PK	88.2	-44.1	2.19 H	172	29.9	14.2
2	#13890.00	33.5 AV	68.2	-34.7	2.19 H	172	19.3	14.2
3	20835.00	48.2 PK	74.0	-25.8	2.09 H	138	50.6	-2.4
4	20835.00	37.0 AV	54.0	-17.0	2.09 H	138	39.4	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	46.4 PK	88.2	-41.8	1.10 V	165	32.2	14.2
2	#13890.00	35.9 AV	68.2	-32.3	1.10 V	165	21.7	14.2
3	20835.00	52.0 PK	74.0	-22.0	2.32 V	215	54.4	-2.4
4	20835.00	40.9 AV	54.0	-13.1	2.32 V	215	43.3	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	43.6 PK	88.2	-44.6	2.15 H	159	28.9	14.7
2	#14050.00	33.3 AV	68.2	-34.9	2.15 H	159	18.6	14.7
3	21075.00	48.7 PK	74.0	-25.3	2.10 H	127	50.5	-1.8
4	21075.00	37.2 AV	54.0	-16.8	2.10 H	127	39.0	-1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	46.4 PK	88.2	-41.8	1.17 V	185	31.7	14.7
2	#14050.00	36.2 AV	68.2	-32.0	1.17 V	185	21.5	14.7
3	21075.00	51.2 PK	74.0	-22.8	2.28 V	230	53.0	-1.8
4	21075.00	40.4 AV	54.0	-13.6	2.28 V	230	42.2	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.4 PK	74.0	-30.6	2.19 H	154	31.5	11.9
2	12050.00	33.3 AV	54.0	-20.7	2.19 H	154	21.4	11.9
3	18075.00	48.4 PK	74.0	-25.6	2.05 H	141	53.1	-4.7
4	18075.00	37.1 AV	54.0	-16.9	2.05 H	141	41.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.3 PK	74.0	-27.7	1.11 V	171	34.4	11.9
2	12050.00	35.8 AV	54.0	-18.2	1.11 V	171	23.9	11.9
3	18075.00	51.4 PK	74.0	-22.6	2.21 V	227	56.1	-4.7
4	18075.00	40.6 AV	54.0	-13.4	2.21 V	227	45.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	44.1 PK	74.0	-29.9	2.14 H	157	32.3	11.8
2	12370.00	33.6 AV	54.0	-20.4	2.14 H	157	21.8	11.8
3	18555.00	48.5 PK	74.0	-25.5	2.14 H	135	52.4	-3.9
4	18555.00	37.1 AV	54.0	-16.9	2.14 H	135	41.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	46.9 PK	74.0	-27.1	1.15 V	165	35.1	11.8
2	12370.00	36.4 AV	54.0	-17.6	1.15 V	165	24.6	11.8
3	18555.00	52.1 PK	74.0	-21.9	2.26 V	215	56.0	-3.9
4	18555.00	40.9 AV	54.0	-13.1	2.26 V	215	44.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.5 PK	74.0	-29.5	2.12 H	149	33.0	11.5
2	12690.00	33.9 AV	54.0	-20.1	2.12 H	149	22.4	11.5
3	19035.00	47.9 PK	74.0	-26.1	2.07 H	126	51.6	-3.7
4	19035.00	37.4 AV	54.0	-16.6	2.07 H	126	41.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.1 PK	74.0	-26.9	1.12 V	176	35.6	11.5
2	12690.00	36.5 AV	54.0	-17.5	1.12 V	176	25.0	11.5
3	19035.00	51.0 PK	74.0	-23.0	2.31 V	226	54.7	-3.7
4	19035.00	40.3 AV	54.0	-13.7	2.31 V	226	44.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	43.8 PK	88.2	-44.4	2.16 H	152	31.8	12.0
2	#13010.00	33.4 AV	68.2	-34.8	2.16 H	152	21.4	12.0
3	19515.00	47.2 PK	74.0	-26.8	2.07 H	139	51.1	-3.9
4	19515.00	36.9 AV	54.0	-17.1	2.07 H	139	40.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	45.7 PK	88.2	-42.5	1.15 V	192	33.7	12.0
2	#13010.00	35.7 AV	68.2	-32.5	1.15 V	192	23.7	12.0
3	19515.00	52.0 PK	74.0	-22.0	2.25 V	239	55.9	-3.9
4	19515.00	41.1 AV	54.0	-12.9	2.25 V	239	45.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.6 PK	74.0	-29.4	2.15 H	134	31.5	13.1
2	13330.00	34.2 AV	54.0	-19.8	2.15 H	134	21.1	13.1
3	19995.00	47.8 PK	74.0	-26.2	2.13 H	133	51.0	-3.2
4	19995.00	37.2 AV	54.0	-16.8	2.13 H	133	40.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.4 PK	74.0	-27.6	1.20 V	164	33.3	13.1
2	13330.00	36.2 AV	54.0	-17.8	1.20 V	164	23.1	13.1
3	19995.00	51.6 PK	74.0	-22.4	2.32 V	231	54.8	-3.2
4	19995.00	40.4 AV	54.0	-13.6	2.32 V	231	43.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	44.5 PK	88.2	-43.7	2.14 H	128	30.5	14.0
2	#13650.00	34.0 AV	68.2	-34.2	2.14 H	128	20.0	14.0
3	20475.00	47.1 PK	74.0	-26.9	2.16 H	136	50.1	-3.0
4	20475.00	36.7 AV	54.0	-17.3	2.16 H	136	39.7	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.9 PK	88.2	-41.3	1.17 V	172	32.9	14.0
2	#13650.00	36.7 AV	68.2	-31.5	1.17 V	172	22.7	14.0
3	20475.00	51.9 PK	74.0	-22.1	2.28 V	211	54.9	-3.0
4	20475.00	40.7 AV	54.0	-13.3	2.28 V	211	43.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.0 PK	88.2	-44.2	2.16 H	147	29.6	14.4
2	#13970.00	33.8 AV	68.2	-34.4	2.16 H	147	19.4	14.4
3	20955.00	48.3 PK	74.0	-25.7	2.10 H	148	50.6	-2.3
4	20955.00	37.5 AV	54.0	-16.5	2.10 H	148	39.8	-2.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.3 PK	88.2	-41.9	1.17 V	170	31.9	14.4
2	#13970.00	36.0 AV	68.2	-32.2	1.17 V	170	21.6	14.4
3	20955.00	51.8 PK	74.0	-22.2	2.28 V	239	54.1	-2.3
4	20955.00	40.9 AV	54.0	-13.1	2.28 V	239	43.2	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

2S2T

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	43.8 PK	74.0	-30.2	2.19 H	178	32.2	11.6
2	11870.00	33.3 AV	54.0	-20.7	2.19 H	178	21.7	11.6
3	17805.00	48.2 PK	74.0	-25.8	2.14 H	125	26.4	21.8
4	17805.00	36.8 AV	54.0	-17.2	2.14 H	125	15.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	46.1 PK	74.0	-27.9	1.22 V	198	34.5	11.6
2	11870.00	35.7 AV	54.0	-18.3	1.22 V	198	24.1	11.6
3	17805.00	51.1 PK	74.0	-22.9	2.24 V	232	29.3	21.8
4	17805.00	40.4 AV	54.0	-13.6	2.24 V	232	18.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.1 PK	74.0	-29.9	2.19 H	172	32.6	11.5
2	11910.00	33.5 AV	54.0	-20.5	2.19 H	172	22.0	11.5
3	17865.00	48.2 PK	74.0	-25.8	2.09 H	138	25.0	23.2
4	17865.00	37.0 AV	54.0	-17.0	2.09 H	138	13.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.4 PK	74.0	-27.6	1.17 V	185	34.9	11.5
2	11910.00	36.2 AV	54.0	-17.8	1.17 V	185	24.7	11.5
3	17865.00	51.2 PK	74.0	-22.8	2.28 V	230	28.0	23.2
4	17865.00	40.4 AV	54.0	-13.6	2.28 V	230	17.2	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.0 PK	88.2	-44.2	2.15 H	164	32.1	11.9
2	#12830.00	33.4 AV	68.2	-34.8	2.15 H	164	21.5	11.9
3	19245.00	48.4 PK	74.0	-25.6	2.08 H	149	52.2	-3.8
4	19245.00	37.1 AV	54.0	-16.9	2.08 H	149	40.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.2 PK	88.2	-42.0	1.12 V	170	34.3	11.9
2	#12830.00	35.9 AV	68.2	-32.3	1.12 V	170	24.0	11.9
3	19245.00	51.1 PK	74.0	-22.9	2.30 V	239	54.9	-3.8
4	19245.00	40.1 AV	54.0	-13.9	2.30 V	239	43.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.1 PK	88.2	-44.1	2.13 H	186	32.0	12.1
2	#12870.00	33.3 AV	68.2	-34.9	2.13 H	186	21.2	12.1
3	19305.00	48.2 PK	74.0	-25.8	2.09 H	148	51.9	-3.7
4	19305.00	37.1 AV	54.0	-16.9	2.09 H	148	40.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.7 PK	88.2	-42.5	1.17 V	190	33.6	12.1
2	#12870.00	35.8 AV	68.2	-32.4	1.17 V	190	23.7	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.30 V	216	54.7	-3.7
4	19305.00	40.4 AV	54.0	-13.6	2.30 V	216	44.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	43.9 PK	88.2	-44.3	2.18 H	174	31.8	12.1
2	#13030.00	33.4 AV	68.2	-34.8	2.18 H	174	21.3	12.1
3	19545.00	48.5 PK	74.0	-25.5	2.13 H	123	52.6	-4.1
4	19545.00	37.4 AV	54.0	-16.6	2.13 H	123	41.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.6 PK	88.2	-41.6	1.18 V	186	34.5	12.1
2	#13030.00	36.6 AV	68.2	-31.6	1.18 V	186	24.5	12.1
3	19545.00	51.3 PK	74.0	-22.7	2.29 V	245	55.4	-4.1
4	19545.00	40.7 AV	54.0	-13.3	2.29 V	245	44.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.5 PK	88.2	-43.7	2.22 H	156	32.1	12.4
2	#13070.00	33.7 AV	68.2	-34.5	2.22 H	156	21.3	12.4
3	19605.00	47.9 PK	74.0	-26.1	2.07 H	142	51.9	-4.0
4	19605.00	36.5 AV	54.0	-17.5	2.07 H	142	40.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.1 PK	88.2	-42.1	1.18 V	191	33.7	12.4
2	#13070.00	36.0 AV	68.2	-32.2	1.18 V	191	23.6	12.4
3	19605.00	50.9 PK	74.0	-23.1	2.25 V	226	54.9	-4.0
4	19605.00	40.0 AV	54.0	-14.0	2.25 V	226	44.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	44.3 PK	88.2	-43.9	2.14 H	182	30.3	14.0
2	#13750.00	33.9 AV	68.2	-34.3	2.14 H	182	19.9	14.0
3	20625.00	48.4 PK	74.0	-25.6	2.15 H	130	51.7	-3.3
4	20625.00	37.0 AV	54.0	-17.0	2.15 H	130	40.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.3 PK	88.2	-41.9	1.22 V	173	32.3	14.0
2	#13750.00	36.2 AV	68.2	-32.0	1.22 V	173	22.2	14.0
3	20625.00	50.6 PK	74.0	-23.4	2.23 V	223	53.9	-3.3
4	20625.00	40.1 AV	54.0	-13.9	2.23 V	223	43.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.0 PK	88.2	-44.2	2.23 H	172	29.6	14.4
2	#13990.00	33.2 AV	68.2	-35.0	2.23 H	172	18.8	14.4
3	20985.00	48.1 PK	74.0	-25.9	2.13 H	148	50.9	-2.8
4	20985.00	37.2 AV	54.0	-16.8	2.13 H	148	40.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.5 PK	88.2	-41.7	1.14 V	183	32.1	14.4
2	#13990.00	36.3 AV	68.2	-31.9	1.14 V	183	21.9	14.4
3	20985.00	50.8 PK	74.0	-23.2	2.30 V	229	53.6	-2.8
4	20985.00	40.0 AV	54.0	-14.0	2.30 V	229	42.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.0 PK	88.2	-44.2	2.19 H	168	29.8	14.2
2	#14230.00	33.3 AV	68.2	-34.9	2.19 H	168	19.1	14.2
3	21345.00	48.2 PK	74.0	-25.8	2.06 H	149	49.8	-1.6
4	21345.00	37.0 AV	54.0	-17.0	2.06 H	149	38.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.7 PK	88.2	-41.5	1.15 V	186	32.5	14.2
2	#14230.00	36.5 AV	68.2	-31.7	1.15 V	186	22.3	14.2
3	21345.00	51.4 PK	74.0	-22.6	2.33 V	237	53.0	-1.6
4	21345.00	40.5 AV	54.0	-13.5	2.33 V	237	42.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	42.9 PK	74.0	-31.1	2.14 H	180	31.3	11.6
2	11870.00	35.2 AV	54.0	-18.8	2.14 H	180	23.6	11.6
3	17805.00	48.8 PK	74.0	-25.2	2.05 H	124	27.0	21.8
4	17805.00	37.5 AV	54.0	-16.5	2.05 H	124	15.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.9 PK	74.0	-28.1	1.14 V	160	34.3	11.6
2	11870.00	35.4 AV	54.0	-18.6	1.14 V	160	23.8	11.6
3	17805.00	50.5 PK	74.0	-23.5	2.30 V	259	28.7	21.8
4	17805.00	39.7 AV	54.0	-14.3	2.30 V	259	17.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.7 PK	74.0	-30.3	2.18 H	174	32.2	11.5
2	11910.00	33.0 AV	54.0	-21.0	2.18 H	174	21.5	11.5
3	17865.00	48.3 PK	74.0	-25.7	2.04 H	127	25.1	23.2
4	17865.00	37.0 AV	54.0	-17.0	2.04 H	127	13.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.2 PK	74.0	-27.8	1.11 V	169	34.7	11.5
2	11910.00	35.7 AV	54.0	-18.3	1.11 V	169	24.2	11.5
3	17865.00	50.5 PK	74.0	-23.5	2.25 V	245	27.3	23.2
4	17865.00	39.9 AV	54.0	-14.1	2.25 V	245	16.7	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.1 PK	88.2	-44.1	2.14 H	163	32.2	11.9
2	#12830.00	33.8 AV	68.2	-34.4	2.14 H	163	21.9	11.9
3	19245.00	48.0 PK	74.0	-26.0	2.06 H	152	51.8	-3.8
4	19245.00	36.8 AV	54.0	-17.2	2.06 H	152	40.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.4 PK	88.2	-41.8	1.11 V	181	34.5	11.9
2	#12830.00	36.3 AV	68.2	-31.9	1.11 V	181	24.4	11.9
3	19245.00	51.6 PK	74.0	-22.4	2.25 V	232	55.4	-3.8
4	19245.00	40.8 AV	54.0	-13.2	2.25 V	232	44.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.3 PK	88.2	-44.9	2.17 H	164	31.2	12.1
2	#12870.00	33.0 AV	68.2	-35.2	2.17 H	164	20.9	12.1
3	19305.00	47.9 PK	74.0	-26.1	2.04 H	133	51.6	-3.7
4	19305.00	36.8 AV	54.0	-17.2	2.04 H	133	40.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.7 PK	88.2	-41.5	1.20 V	197	34.6	12.1
2	#12870.00	36.6 AV	68.2	-31.6	1.20 V	197	24.5	12.1
3	19305.00	51.9 PK	74.0	-22.1	2.27 V	222	55.6	-3.7
4	19305.00	40.8 AV	54.0	-13.2	2.27 V	222	44.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.3 PK	88.2	-43.9	2.18 H	170	32.2	12.1
2	#13030.00	33.6 AV	68.2	-34.6	2.18 H	170	21.5	12.1
3	19545.00	48.1 PK	74.0	-25.9	2.10 H	151	52.2	-4.1
4	19545.00	37.1 AV	54.0	-16.9	2.10 H	151	41.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.2 PK	88.2	-42.0	1.19 V	181	34.1	12.1
2	#13030.00	36.1 AV	68.2	-32.1	1.19 V	181	24.0	12.1
3	19545.00	51.3 PK	74.0	-22.7	2.24 V	243	55.4	-4.1
4	19545.00	40.5 AV	54.0	-13.5	2.24 V	243	44.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.0 PK	88.2	-44.2	2.24 H	161	31.6	12.4
2	#13070.00	33.1 AV	68.2	-35.1	2.24 H	161	20.7	12.4
3	19605.00	48.1 PK	74.0	-25.9	2.03 H	123	52.1	-4.0
4	19605.00	37.1 AV	54.0	-16.9	2.03 H	123	41.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.7 PK	88.2	-41.5	1.21 V	186	34.3	12.4
2	#13070.00	36.5 AV	68.2	-31.7	1.21 V	186	24.1	12.4
3	19605.00	51.6 PK	74.0	-22.4	2.24 V	217	55.6	-4.0
4	19605.00	40.6 AV	54.0	-13.4	2.24 V	217	44.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	44.5 PK	88.2	-43.7	2.19 H	161	30.5	14.0
2	#13750.00	33.8 AV	68.2	-34.4	2.19 H	161	19.8	14.0
3	20625.00	48.6 PK	74.0	-25.4	2.11 H	130	51.9	-3.3
4	20625.00	37.3 AV	54.0	-16.7	2.11 H	130	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.3 PK	88.2	-41.9	1.16 V	204	32.3	14.0
2	#13750.00	36.2 AV	68.2	-32.0	1.16 V	204	22.2	14.0
3	20625.00	50.8 PK	74.0	-23.2	2.30 V	240	54.1	-3.3
4	20625.00	40.2 AV	54.0	-13.8	2.30 V	240	43.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.5 PK	88.2	-44.7	2.23 H	171	29.1	14.4
2	#13990.00	33.0 AV	68.2	-35.2	2.23 H	171	18.6	14.4
3	20985.00	47.7 PK	74.0	-26.3	2.13 H	129	50.5	-2.8
4	20985.00	36.8 AV	54.0	-17.2	2.13 H	129	39.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.6 PK	88.2	-41.6	1.15 V	196	32.2	14.4
2	#13990.00	36.5 AV	68.2	-31.7	1.15 V	196	22.1	14.4
3	20985.00	51.6 PK	74.0	-22.4	2.26 V	217	54.4	-2.8
4	20985.00	40.5 AV	54.0	-13.5	2.26 V	217	43.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	42.8 PK	88.2	-45.4	2.25 H	165	28.6	14.2
2	#14230.00	32.6 AV	68.2	-35.6	2.25 H	165	18.4	14.2
3	21345.00	48.0 PK	74.0	-26.0	2.17 H	122	49.6	-1.6
4	21345.00	36.8 AV	54.0	-17.2	2.17 H	122	38.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.3 PK	88.2	-41.9	1.12 V	194	32.1	14.2
2	#14230.00	36.1 AV	68.2	-32.1	1.12 V	194	21.9	14.2
3	21345.00	51.7 PK	74.0	-22.3	2.22 V	216	53.3	-1.6
4	21345.00	40.4 AV	54.0	-13.6	2.22 V	216	42.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.5 PK	74.0	-29.5	2.19 H	183	32.9	11.6
2	11870.00	33.8 AV	54.0	-20.2	2.19 H	183	22.2	11.6
3	17805.00	47.7 PK	74.0	-26.3	2.00 H	113	25.9	21.8
4	17805.00	36.1 AV	54.0	-17.9	2.00 H	113	14.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	45.9 PK	74.0	-28.1	1.23 V	186	34.3	11.6
2	11870.00	36.6 AV	54.0	-17.4	1.23 V	186	25.0	11.6
3	17805.00	50.6 PK	74.0	-23.4	2.29 V	218	28.8	21.8
4	17805.00	40.1 AV	54.0	-13.9	2.29 V	218	18.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.4 PK	74.0	-29.6	2.17 H	181	32.9	11.5
2	11910.00	33.7 AV	54.0	-20.3	2.17 H	181	22.2	11.5
3	17865.00	48.0 PK	74.0	-26.0	2.06 H	124	24.8	23.2
4	17865.00	36.5 AV	54.0	-17.5	2.06 H	124	13.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.4 PK	74.0	-27.6	1.18 V	193	34.9	11.5
2	11910.00	36.1 AV	54.0	-17.9	1.18 V	193	24.6	11.5
3	17865.00	51.0 PK	74.0	-23.0	2.25 V	222	27.8	23.2
4	17865.00	40.3 AV	54.0	-13.7	2.25 V	222	17.1	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.7 PK	88.2	-44.5	2.16 H	170	31.8	11.9
2	#12830.00	33.2 AV	68.2	-35.0	2.16 H	170	21.3	11.9
3	19245.00	47.8 PK	74.0	-26.2	2.08 H	151	51.6	-3.8
4	19245.00	36.8 AV	54.0	-17.2	2.08 H	151	40.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.7 PK	88.2	-41.5	1.12 V	177	34.8	11.9
2	#12830.00	36.4 AV	68.2	-31.8	1.12 V	177	24.5	11.9
3	19245.00	50.9 PK	74.0	-23.1	2.33 V	239	54.7	-3.8
4	19245.00	40.1 AV	54.0	-13.9	2.33 V	239	43.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.6 PK	88.2	-44.6	2.21 H	188	31.5	12.1
2	#12870.00	33.1 AV	68.2	-35.1	2.21 H	188	21.0	12.1
3	19305.00	47.8 PK	74.0	-26.2	2.06 H	123	51.5	-3.7
4	19305.00	36.6 AV	54.0	-17.4	2.06 H	123	40.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.1 PK	88.2	-42.1	1.21 V	177	34.0	12.1
2	#12870.00	35.8 AV	68.2	-32.4	1.21 V	177	23.7	12.1
3	19305.00	51.0 PK	74.0	-23.0	2.32 V	216	54.7	-3.7
4	19305.00	40.2 AV	54.0	-13.8	2.32 V	216	43.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.3 PK	88.2	-43.9	2.14 H	158	32.2	12.1
2	#13030.00	33.4 AV	68.2	-34.8	2.14 H	158	21.3	12.1
3	19545.00	48.7 PK	74.0	-25.3	2.06 H	133	52.8	-4.1
4	19545.00	37.3 AV	54.0	-16.7	2.06 H	133	41.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.6 PK	88.2	-41.6	1.20 V	175	34.5	12.1
2	#13030.00	36.5 AV	68.2	-31.7	1.20 V	175	24.4	12.1
3	19545.00	51.3 PK	74.0	-22.7	2.29 V	243	55.4	-4.1
4	19545.00	40.3 AV	54.0	-13.7	2.29 V	243	44.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.9 PK	88.2	-44.3	2.16 H	186	31.5	12.4
2	#13070.00	33.2 AV	68.2	-35.0	2.16 H	186	20.8	12.4
3	19605.00	48.4 PK	74.0	-25.6	2.04 H	145	52.4	-4.0
4	19605.00	37.3 AV	54.0	-16.7	2.04 H	145	41.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.9 PK	88.2	-41.3	1.17 V	170	34.5	12.4
2	#13070.00	36.7 AV	68.2	-31.5	1.17 V	170	24.3	12.4
3	19605.00	50.7 PK	74.0	-23.3	2.27 V	237	54.7	-4.0
4	19605.00	40.1 AV	54.0	-13.9	2.27 V	237	44.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	43.9 PK	88.2	-44.3	2.15 H	172	29.9	14.0
2	#13750.00	33.2 AV	68.2	-35.0	2.15 H	172	19.2	14.0
3	20625.00	48.6 PK	74.0	-25.4	2.04 H	142	51.9	-3.3
4	20625.00	37.3 AV	54.0	-16.7	2.04 H	142	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.4 PK	88.2	-41.8	1.22 V	203	32.4	14.0
2	#13750.00	36.2 AV	68.2	-32.0	1.22 V	203	22.2	14.0
3	20625.00	50.8 PK	74.0	-23.2	2.29 V	227	54.1	-3.3
4	20625.00	40.1 AV	54.0	-13.9	2.29 V	227	43.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	44.1 PK	88.2	-44.1	2.20 H	185	29.7	14.4
2	#13990.00	33.6 AV	68.2	-34.6	2.20 H	185	19.2	14.4
3	20985.00	47.8 PK	74.0	-26.2	2.11 H	146	50.6	-2.8
4	20985.00	36.6 AV	54.0	-17.4	2.11 H	146	39.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.2 PK	88.2	-42.0	1.16 V	195	31.8	14.4
2	#13990.00	36.2 AV	68.2	-32.0	1.16 V	195	21.8	14.4
3	20985.00	51.1 PK	74.0	-22.9	2.25 V	231	53.9	-2.8
4	20985.00	40.5 AV	54.0	-13.5	2.25 V	231	43.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.7 PK	88.2	-44.5	2.21 H	177	29.5	14.2
2	#14230.00	33.1 AV	68.2	-35.1	2.21 H	177	18.9	14.2
3	21345.00	47.7 PK	74.0	-26.3	2.12 H	143	49.3	-1.6
4	21345.00	36.5 AV	54.0	-17.5	2.12 H	143	38.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.2 PK	88.2	-42.0	1.16 V	188	32.0	14.2
2	#14230.00	36.1 AV	68.2	-32.1	1.16 V	188	21.9	14.2
3	21345.00	51.6 PK	74.0	-22.4	2.31 V	229	53.2	-1.6
4	21345.00	40.7 AV	54.0	-13.3	2.31 V	229	42.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

2S2T

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.8 PK	74.0	-29.2	2.25 H	149	33.2	11.6
2	11870.00	34.2 AV	54.0	-19.8	2.25 H	149	22.6	11.6
3	17805.00	47.7 PK	74.0	-26.3	2.13 H	127	25.9	21.8
4	17805.00	36.8 AV	54.0	-17.2	2.13 H	127	15.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.0 PK	74.0	-27.0	1.15 V	200	35.4	11.6
2	11870.00	36.7 AV	54.0	-17.3	1.15 V	200	25.1	11.6
3	17805.00	50.9 PK	74.0	-23.1	2.30 V	220	29.1	21.8
4	17805.00	39.7 AV	54.0	-14.3	2.30 V	220	17.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.5 PK	74.0	-29.5	2.26 H	163	33.0	11.5
2	11910.00	33.7 AV	54.0	-20.3	2.26 H	163	22.2	11.5
3	17865.00	47.9 PK	74.0	-26.1	2.13 H	117	24.7	23.2
4	17865.00	37.0 AV	54.0	-17.0	2.13 H	117	13.8	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.8 PK	74.0	-27.2	1.13 V	195	35.3	11.5
2	11910.00	36.7 AV	54.0	-17.3	1.13 V	195	25.2	11.5
3	17865.00	51.2 PK	74.0	-22.8	2.32 V	219	28.0	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.32 V	219	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.4 PK	88.2	-44.8	2.19 H	169	31.5	11.9
2	#12830.00	32.9 AV	68.2	-35.3	2.19 H	169	21.0	11.9
3	19245.00	48.3 PK	74.0	-25.7	2.03 H	129	52.1	-3.8
4	19245.00	37.2 AV	54.0	-16.8	2.03 H	129	41.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.3 PK	88.2	-41.9	1.13 V	180	34.4	11.9
2	#12830.00	36.3 AV	68.2	-31.9	1.13 V	180	24.4	11.9
3	19245.00	51.5 PK	74.0	-22.5	2.25 V	237	55.3	-3.8
4	19245.00	40.6 AV	54.0	-13.4	2.25 V	237	44.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.8 PK	88.2	-44.4	2.27 H	156	31.7	12.1
2	#12870.00	33.0 AV	68.2	-35.2	2.27 H	156	20.9	12.1
3	19305.00	47.8 PK	74.0	-26.2	2.10 H	127	51.5	-3.7
4	19305.00	37.0 AV	54.0	-17.0	2.10 H	127	40.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.8 PK	88.2	-41.4	1.17 V	173	34.7	12.1
2	#12870.00	36.7 AV	68.2	-31.5	1.17 V	173	24.6	12.1
3	19305.00	50.6 PK	74.0	-23.4	2.32 V	229	54.3	-3.7
4	19305.00	40.0 AV	54.0	-14.0	2.32 V	229	43.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	44.2 PK	88.2	-44.0	2.25 H	168	32.1	12.1
2	#13030.00	33.4 AV	68.2	-34.8	2.25 H	168	21.3	12.1
3	19545.00	48.3 PK	74.0	-25.7	2.05 H	125	52.4	-4.1
4	19545.00	37.3 AV	54.0	-16.7	2.05 H	125	41.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.9 PK	88.2	-41.3	1.21 V	183	34.8	12.1
2	#13030.00	36.6 AV	68.2	-31.6	1.21 V	183	24.5	12.1
3	19545.00	51.6 PK	74.0	-22.4	2.28 V	230	55.7	-4.1
4	19545.00	40.6 AV	54.0	-13.4	2.28 V	230	44.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.5 PK	88.2	-43.7	2.19 H	169	32.1	12.4
2	#13070.00	33.7 AV	68.2	-34.5	2.19 H	169	21.3	12.4
3	19605.00	48.0 PK	74.0	-26.0	2.07 H	119	52.0	-4.0
4	19605.00	36.7 AV	54.0	-17.3	2.07 H	119	40.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.5 PK	88.2	-41.7	1.19 V	201	34.1	12.4
2	#13070.00	36.5 AV	68.2	-31.7	1.19 V	201	24.1	12.4
3	19605.00	50.7 PK	74.0	-23.3	2.37 V	233	54.7	-4.0
4	19605.00	39.8 AV	54.0	-14.2	2.37 V	233	43.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	43.4 PK	88.2	-44.8	2.20 H	165	29.4	14.0
2	#13750.00	32.9 AV	68.2	-35.3	2.20 H	165	18.9	14.0
3	20625.00	47.7 PK	74.0	-26.3	2.11 H	145	51.0	-3.3
4	20625.00	36.8 AV	54.0	-17.2	2.11 H	145	40.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	45.9 PK	88.2	-42.3	1.14 V	187	31.9	14.0
2	#13750.00	36.0 AV	68.2	-32.2	1.14 V	187	22.0	14.0
3	20625.00	50.6 PK	74.0	-23.4	2.31 V	231	53.9	-3.3
4	20625.00	40.0 AV	54.0	-14.0	2.31 V	231	43.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.8 PK	88.2	-44.4	2.19 H	173	29.4	14.4
2	#13990.00	33.2 AV	68.2	-35.0	2.19 H	173	18.8	14.4
3	20985.00	48.3 PK	74.0	-25.7	2.04 H	137	51.1	-2.8
4	20985.00	37.2 AV	54.0	-16.8	2.04 H	137	40.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.5 PK	88.2	-41.7	1.17 V	189	32.1	14.4
2	#13990.00	36.0 AV	68.2	-32.2	1.17 V	189	21.6	14.4
3	20985.00	51.4 PK	74.0	-22.6	2.28 V	221	54.2	-2.8
4	20985.00	40.7 AV	54.0	-13.3	2.28 V	221	43.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.0 PK	88.2	-44.2	2.28 H	150	29.8	14.2
2	#14230.00	33.6 AV	68.2	-34.6	2.28 H	150	19.4	14.2
3	21345.00	48.1 PK	74.0	-25.9	2.07 H	125	49.7	-1.6
4	21345.00	37.0 AV	54.0	-17.0	2.07 H	125	38.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.7 PK	88.2	-42.5	1.09 V	203	31.5	14.2
2	#14230.00	35.7 AV	68.2	-32.5	1.09 V	203	21.5	14.2
3	21345.00	50.9 PK	74.0	-23.1	2.26 V	234	52.5	-1.6
4	21345.00	40.3 AV	54.0	-13.7	2.26 V	234	41.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.0 PK	74.0	-30.0	2.27 H	171	32.4	11.6
2	11870.00	33.5 AV	54.0	-20.5	2.27 H	171	21.9	11.6
3	17805.00	47.4 PK	74.0	-26.6	2.05 H	138	25.6	21.8
4	17805.00	36.2 AV	54.0	-17.8	2.05 H	138	14.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	47.3 PK	74.0	-26.7	1.19 V	191	35.7	11.6
2	11870.00	37.0 AV	54.0	-17.0	1.19 V	191	25.4	11.6
3	17805.00	51.3 PK	74.0	-22.7	2.20 V	210	29.5	21.8
4	17805.00	40.0 AV	54.0	-14.0	2.20 V	210	18.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.8 PK	74.0	-30.2	2.21 H	161	32.3	11.5
2	11910.00	33.4 AV	54.0	-20.6	2.21 H	161	21.9	11.5
3	17865.00	47.6 PK	74.0	-26.4	2.09 H	123	24.4	23.2
4	17865.00	36.5 AV	54.0	-17.5	2.09 H	123	13.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.8 PK	74.0	-27.2	1.19 V	194	35.3	11.5
2	11910.00	36.5 AV	54.0	-17.5	1.19 V	194	25.0	11.5
3	17865.00	51.2 PK	74.0	-22.8	2.23 V	217	28.0	23.2
4	17865.00	40.2 AV	54.0	-13.8	2.23 V	217	17.0	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.9 PK	88.2	-44.3	2.22 H	159	32.0	11.9
2	#12830.00	33.1 AV	68.2	-35.1	2.22 H	159	21.2	11.9
3	19245.00	48.6 PK	74.0	-25.4	2.10 H	144	52.4	-3.8
4	19245.00	37.4 AV	54.0	-16.6	2.10 H	144	41.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	46.1 PK	88.2	-42.1	1.15 V	185	34.2	11.9
2	#12830.00	35.9 AV	68.2	-32.3	1.15 V	185	24.0	11.9
3	19245.00	51.5 PK	74.0	-22.5	2.28 V	234	55.3	-3.8
4	19245.00	40.4 AV	54.0	-13.6	2.28 V	234	44.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.8 PK	88.2	-44.4	2.19 H	183	31.7	12.1
2	#12870.00	33.5 AV	68.2	-34.7	2.19 H	183	21.4	12.1
3	19305.00	48.7 PK	74.0	-25.3	2.12 H	154	52.4	-3.7
4	19305.00	37.2 AV	54.0	-16.8	2.12 H	154	40.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	46.7 PK	88.2	-41.5	1.13 V	199	34.6	12.1
2	#12870.00	36.3 AV	68.2	-31.9	1.13 V	199	24.2	12.1
3	19305.00	51.9 PK	74.0	-22.1	2.24 V	242	55.6	-3.7
4	19305.00	40.9 AV	54.0	-13.1	2.24 V	242	44.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	43.9 PK	88.2	-44.3	2.22 H	162	31.8	12.1
2	#13030.00	33.3 AV	68.2	-34.9	2.22 H	162	21.2	12.1
3	19545.00	47.8 PK	74.0	-26.2	2.07 H	131	51.9	-4.1
4	19545.00	36.8 AV	54.0	-17.2	2.07 H	131	40.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	46.2 PK	88.2	-42.0	1.23 V	161	34.1	12.1
2	#13030.00	35.6 AV	68.2	-32.6	1.23 V	161	23.5	12.1
3	19545.00	50.7 PK	74.0	-23.3	2.22 V	249	54.8	-4.1
4	19545.00	40.0 AV	54.0	-14.0	2.22 V	249	44.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.0 PK	88.2	-44.2	2.14 H	186	31.6	12.4
2	#13070.00	33.3 AV	68.2	-34.9	2.14 H	186	20.9	12.4
3	19605.00	48.1 PK	74.0	-25.9	2.11 H	147	52.1	-4.0
4	19605.00	36.8 AV	54.0	-17.2	2.11 H	147	40.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.4 PK	88.2	-41.8	1.23 V	175	34.0	12.4
2	#13070.00	35.9 AV	68.2	-32.3	1.23 V	175	23.5	12.4
3	19605.00	51.1 PK	74.0	-22.9	2.26 V	240	55.1	-4.0
4	19605.00	40.4 AV	54.0	-13.6	2.26 V	240	44.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	44.0 PK	88.2	-44.2	2.24 H	158	30.0	14.0
2	#13750.00	33.7 AV	68.2	-34.5	2.24 H	158	19.7	14.0
3	20625.00	47.2 PK	74.0	-26.8	2.13 H	137	50.5	-3.3
4	20625.00	36.4 AV	54.0	-17.6	2.13 H	137	39.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	46.2 PK	88.2	-42.0	1.16 V	194	32.2	14.0
2	#13750.00	35.9 AV	68.2	-32.3	1.16 V	194	21.9	14.0
3	20625.00	51.3 PK	74.0	-22.7	2.31 V	244	54.6	-3.3
4	20625.00	40.3 AV	54.0	-13.7	2.31 V	244	43.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.5 PK	88.2	-44.7	2.24 H	160	29.1	14.4
2	#13990.00	32.8 AV	68.2	-35.4	2.24 H	160	18.4	14.4
3	20985.00	47.7 PK	74.0	-26.3	2.09 H	139	50.5	-2.8
4	20985.00	36.8 AV	54.0	-17.2	2.09 H	139	39.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	46.0 PK	88.2	-42.2	1.15 V	195	31.6	14.4
2	#13990.00	36.1 AV	68.2	-32.1	1.15 V	195	21.7	14.4
3	20985.00	50.3 PK	74.0	-23.7	2.27 V	222	53.1	-2.8
4	20985.00	39.8 AV	54.0	-14.2	2.27 V	222	42.6	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.5 PK	88.2	-43.7	2.24 H	151	30.3	14.2
2	#14230.00	33.6 AV	68.2	-34.6	2.24 H	151	19.4	14.2
3	21345.00	48.1 PK	74.0	-25.9	2.07 H	125	49.7	-1.6
4	21345.00	37.0 AV	54.0	-17.0	2.07 H	125	38.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.4 PK	88.2	-41.8	1.13 V	193	32.2	14.2
2	#14230.00	36.0 AV	68.2	-32.2	1.13 V	193	21.8	14.2
3	21345.00	51.0 PK	74.0	-23.0	2.33 V	226	52.6	-1.6
4	21345.00	40.3 AV	54.0	-13.7	2.33 V	226	41.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	43.6 PK	74.0	-30.4	2.21 H	161	32.1	11.5
2	11970.00	33.1 AV	54.0	-20.9	2.21 H	161	21.6	11.5
3	17955.00	47.5 PK	74.0	-26.5	2.11 H	141	21.8	25.7
4	17955.00	36.6 AV	54.0	-17.4	2.11 H	141	10.9	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.3 PK	74.0	-28.7	1.19 V	188	33.8	11.5
2	11970.00	35.6 AV	54.0	-18.4	1.19 V	188	24.1	11.5
3	17955.00	50.8 PK	74.0	-23.2	2.32 V	243	25.1	25.7
4	17955.00	40.2 AV	54.0	-13.8	2.32 V	243	14.5	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	43.9 PK	88.2	-44.3	2.25 H	173	32.3	11.6
2	#12770.00	33.4 AV	68.2	-34.8	2.25 H	173	21.8	11.6
3	19155.00	47.5 PK	74.0	-26.5	2.03 H	147	51.3	-3.8
4	19155.00	36.5 AV	54.0	-17.5	2.03 H	147	40.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	46.1 PK	88.2	-42.1	1.14 V	187	34.5	11.6
2	#12770.00	36.4 AV	68.2	-31.8	1.14 V	187	24.8	11.6
3	19155.00	50.2 PK	74.0	-23.8	2.34 V	220	54.0	-3.8
4	19155.00	39.8 AV	54.0	-14.2	2.34 V	220	43.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	43.6 PK	88.2	-44.6	2.25 H	168	31.3	12.3
2	#12930.00	32.9 AV	68.2	-35.3	2.25 H	168	20.6	12.3
3	19395.00	47.2 PK	74.0	-26.8	2.02 H	138	50.9	-3.7
4	19395.00	36.4 AV	54.0	-17.6	2.02 H	138	40.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	46.1 PK	88.2	-42.1	1.13 V	199	33.8	12.3
2	#12930.00	36.1 AV	68.2	-32.1	1.13 V	199	23.8	12.3
3	19395.00	50.9 PK	74.0	-23.1	2.33 V	219	54.6	-3.7
4	19395.00	40.4 AV	54.0	-13.6	2.33 V	219	44.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	44.1 PK	88.2	-44.1	2.19 H	146	31.7	12.4
2	#13090.00	33.7 AV	68.2	-34.5	2.19 H	146	21.3	12.4
3	19635.00	47.4 PK	74.0	-26.6	2.10 H	119	51.4	-4.0
4	19635.00	36.6 AV	54.0	-17.4	2.10 H	119	40.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	45.6 PK	88.2	-42.6	1.08 V	197	33.2	12.4
2	#13090.00	35.5 AV	68.2	-32.7	1.08 V	197	23.1	12.4
3	19635.00	50.6 PK	74.0	-23.4	2.31 V	240	54.6	-4.0
4	19635.00	40.1 AV	54.0	-13.9	2.31 V	240	44.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	44.4 PK	88.2	-43.8	2.17 H	161	30.4	14.0
2	#13730.00	33.6 AV	68.2	-34.6	2.17 H	161	19.6	14.0
3	20595.00	47.8 PK	74.0	-26.2	2.09 H	138	51.1	-3.3
4	20595.00	36.6 AV	54.0	-17.4	2.09 H	138	39.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	46.2 PK	88.2	-42.0	1.10 V	190	32.2	14.0
2	#13730.00	36.2 AV	68.2	-32.0	1.10 V	190	22.2	14.0
3	20595.00	51.1 PK	74.0	-22.9	2.36 V	244	54.4	-3.3
4	20595.00	40.2 AV	54.0	-13.8	2.36 V	244	43.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	43.7 PK	88.2	-44.5	2.19 H	160	29.5	14.2
2	#13890.00	33.0 AV	68.2	-35.2	2.19 H	160	18.8	14.2
3	20835.00	47.5 PK	74.0	-26.5	2.02 H	141	50.4	-2.9
4	20835.00	36.4 AV	54.0	-17.6	2.02 H	141	39.3	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	45.6 PK	88.2	-42.6	1.17 V	180	31.4	14.2
2	#13890.00	35.8 AV	68.2	-32.4	1.17 V	180	21.6	14.2
3	20835.00	51.1 PK	74.0	-22.9	2.33 V	242	54.0	-2.9
4	20835.00	40.3 AV	54.0	-13.7	2.33 V	242	43.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	43.9 PK	88.2	-44.3	2.16 H	151	29.2	14.7
2	#14050.00	33.1 AV	68.2	-35.1	2.16 H	151	18.4	14.7
3	21075.00	47.8 PK	74.0	-26.2	2.07 H	120	50.0	-2.2
4	21075.00	36.9 AV	54.0	-17.1	2.07 H	120	39.1	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	47.0 PK	88.2	-41.2	1.13 V	199	32.3	14.7
2	#14050.00	36.8 AV	68.2	-31.4	1.13 V	199	22.1	14.7
3	21075.00	50.8 PK	74.0	-23.2	2.38 V	242	53.0	-2.2
4	21075.00	39.9 AV	54.0	-14.1	2.38 V	242	42.1	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.0 PK	74.0	-30.0	2.28 H	164	32.1	11.9
2	12050.00	33.2 AV	54.0	-20.8	2.28 H	164	21.3	11.9
3	18075.00	47.5 PK	74.0	-26.5	2.12 H	127	52.2	-4.7
4	18075.00	36.5 AV	54.0	-17.5	2.12 H	127	41.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	45.8 PK	74.0	-28.2	1.19 V	189	33.9	11.9
2	12050.00	36.1 AV	54.0	-17.9	1.19 V	189	24.2	11.9
3	18075.00	50.3 PK	74.0	-23.7	2.32 V	238	55.0	-4.7
4	18075.00	39.8 AV	54.0	-14.2	2.32 V	238	44.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.2 PK	74.0	-29.8	2.17 H	159	32.7	11.5
2	12690.00	33.5 AV	54.0	-20.5	2.17 H	159	22.0	11.5
3	19035.00	47.6 PK	74.0	-26.4	2.10 H	125	51.5	-3.9
4	19035.00	36.6 AV	54.0	-17.4	2.10 H	125	40.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	46.3 PK	74.0	-27.7	1.10 V	180	34.8	11.5
2	12690.00	36.4 AV	54.0	-17.6	1.10 V	180	24.9	11.5
3	19035.00	50.7 PK	74.0	-23.3	2.27 V	224	54.6	-3.9
4	19035.00	39.8 AV	54.0	-14.2	2.27 V	224	43.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	43.6 PK	88.2	-44.6	2.22 H	147	31.6	12.0
2	#13010.00	33.1 AV	68.2	-35.1	2.22 H	147	21.1	12.0
3	19515.00	47.9 PK	74.0	-26.1	2.03 H	137	52.0	-4.1
4	19515.00	37.2 AV	54.0	-16.8	2.03 H	137	41.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	45.3 PK	88.2	-42.9	1.13 V	196	33.3	12.0
2	#13010.00	35.6 AV	68.2	-32.6	1.13 V	196	23.6	12.0
3	19515.00	50.2 PK	74.0	-23.8	2.34 V	245	54.3	-4.1
4	19515.00	39.7 AV	54.0	-14.3	2.34 V	245	43.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.1 PK	74.0	-29.9	2.18 H	172	31.0	13.1
2	13330.00	33.8 AV	54.0	-20.2	2.18 H	172	20.7	13.1
3	19995.00	47.2 PK	74.0	-26.8	2.05 H	128	50.8	-3.6
4	19995.00	36.4 AV	54.0	-17.6	2.05 H	128	40.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.0 PK	74.0	-28.0	1.16 V	187	32.9	13.1
2	13330.00	35.9 AV	54.0	-18.1	1.16 V	187	22.8	13.1
3	19995.00	50.1 PK	74.0	-23.9	2.28 V	222	53.7	-3.6
4	19995.00	39.8 AV	54.0	-14.2	2.28 V	222	43.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	43.8 PK	88.2	-44.4	2.21 H	177	29.8	14.0
2	#13650.00	33.0 AV	68.2	-35.2	2.21 H	177	19.0	14.0
3	20475.00	47.7 PK	74.0	-26.3	2.02 H	133	50.9	-3.2
4	20475.00	36.7 AV	54.0	-17.3	2.02 H	133	39.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	45.9 PK	88.2	-42.3	1.10 V	198	31.9	14.0
2	#13650.00	36.2 AV	68.2	-32.0	1.10 V	198	22.2	14.0
3	20475.00	50.7 PK	74.0	-23.3	2.30 V	241	53.9	-3.2
4	20475.00	40.3 AV	54.0	-13.7	2.30 V	241	43.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	43.8 PK	88.2	-44.4	2.21 H	178	29.4	14.4
2	#13970.00	33.2 AV	68.2	-35.0	2.21 H	178	18.8	14.4
3	20955.00	47.5 PK	74.0	-26.5	2.05 H	131	50.2	-2.7
4	20955.00	36.4 AV	54.0	-17.6	2.05 H	131	39.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.1 PK	88.2	-42.1	1.13 V	188	31.7	14.4
2	#13970.00	36.1 AV	68.2	-32.1	1.13 V	188	21.7	14.4
3	20955.00	50.4 PK	74.0	-23.6	2.36 V	232	53.1	-2.7
4	20955.00	40.0 AV	54.0	-14.0	2.36 V	232	42.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.8 PK	74.0	-30.2	2.26 H	153	31.9	11.9
2	12050.00	33.1 AV	54.0	-20.9	2.26 H	153	21.2	11.9
3	18075.00	47.7 PK	74.0	-26.3	2.08 H	142	52.4	-4.7
4	18075.00	36.6 AV	54.0	-17.4	2.08 H	142	41.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	46.1 PK	74.0	-27.9	1.09 V	183	34.2	11.9
2	12050.00	36.4 AV	54.0	-17.6	1.09 V	183	24.5	11.9
3	18075.00	50.5 PK	74.0	-23.5	2.37 V	236	55.2	-4.7
4	18075.00	40.2 AV	54.0	-13.8	2.37 V	236	44.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.5 PK	74.0	-29.5	2.20 H	165	33.0	11.5
2	12690.00	33.8 AV	54.0	-20.2	2.20 H	165	22.3	11.5
3	19035.00	47.3 PK	74.0	-26.7	2.01 H	132	51.2	-3.9
4	19035.00	36.4 AV	54.0	-17.6	2.01 H	132	40.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.7 PK	74.0	-28.3	1.13 V	194	34.2	11.5
2	12690.00	35.6 AV	54.0	-18.4	1.13 V	194	24.1	11.5
3	19035.00	51.0 PK	74.0	-23.0	2.30 V	238	54.9	-3.9
4	19035.00	40.2 AV	54.0	-13.8	2.30 V	238	44.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	44.3 PK	88.2	-43.9	2.22 H	167	32.3	12.0
2	#13010.00	33.5 AV	68.2	-34.7	2.22 H	167	21.5	12.0
3	19515.00	48.1 PK	74.0	-25.9	2.02 H	136	52.2	-4.1
4	19515.00	36.9 AV	54.0	-17.1	2.02 H	136	41.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	45.6 PK	88.2	-42.6	1.19 V	187	33.6	12.0
2	#13010.00	36.0 AV	68.2	-32.2	1.19 V	187	24.0	12.0
3	19515.00	51.3 PK	74.0	-22.7	2.37 V	238	55.4	-4.1
4	19515.00	40.4 AV	54.0	-13.6	2.37 V	238	44.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	43.3 PK	74.0	-30.7	2.21 H	165	30.2	13.1
2	13330.00	32.9 AV	54.0	-21.1	2.21 H	165	19.8	13.1
3	19995.00	47.7 PK	74.0	-26.3	2.08 H	127	51.3	-3.6
4	19995.00	36.4 AV	54.0	-17.6	2.08 H	127	40.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.2 PK	74.0	-28.8	1.15 V	171	32.1	13.1
2	13330.00	35.5 AV	54.0	-18.5	1.15 V	171	22.4	13.1
3	19995.00	50.8 PK	74.0	-23.2	2.37 V	217	54.4	-3.6
4	19995.00	40.1 AV	54.0	-13.9	2.37 V	217	43.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	43.7 PK	88.2	-44.5	2.17 H	175	29.7	14.0
2	#13650.00	32.9 AV	68.2	-35.3	2.17 H	175	18.9	14.0
3	20475.00	48.2 PK	74.0	-25.8	2.06 H	141	51.4	-3.2
4	20475.00	37.0 AV	54.0	-17.0	2.06 H	141	40.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	46.3 PK	88.2	-41.9	1.10 V	182	32.3	14.0
2	#13650.00	36.2 AV	68.2	-32.0	1.10 V	182	22.2	14.0
3	20475.00	50.9 PK	74.0	-23.1	2.30 V	243	54.1	-3.2
4	20475.00	40.2 AV	54.0	-13.8	2.30 V	243	43.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.0 PK	88.2	-44.2	2.17 H	146	29.6	14.4
2	#13970.00	33.4 AV	68.2	-34.8	2.17 H	146	19.0	14.4
3	20955.00	47.7 PK	74.0	-26.3	2.06 H	125	50.4	-2.7
4	20955.00	37.0 AV	54.0	-17.0	2.06 H	125	39.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	46.5 PK	88.2	-41.7	1.16 V	201	32.1	14.4
2	#13970.00	36.4 AV	68.2	-31.8	1.16 V	201	22.0	14.4
3	20955.00	50.7 PK	74.0	-23.3	2.33 V	227	53.4	-2.7
4	20955.00	40.1 AV	54.0	-13.9	2.33 V	227	42.8	-2.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

09_Mode B(Indoor AP) Plot of Other Emission

Mode B


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

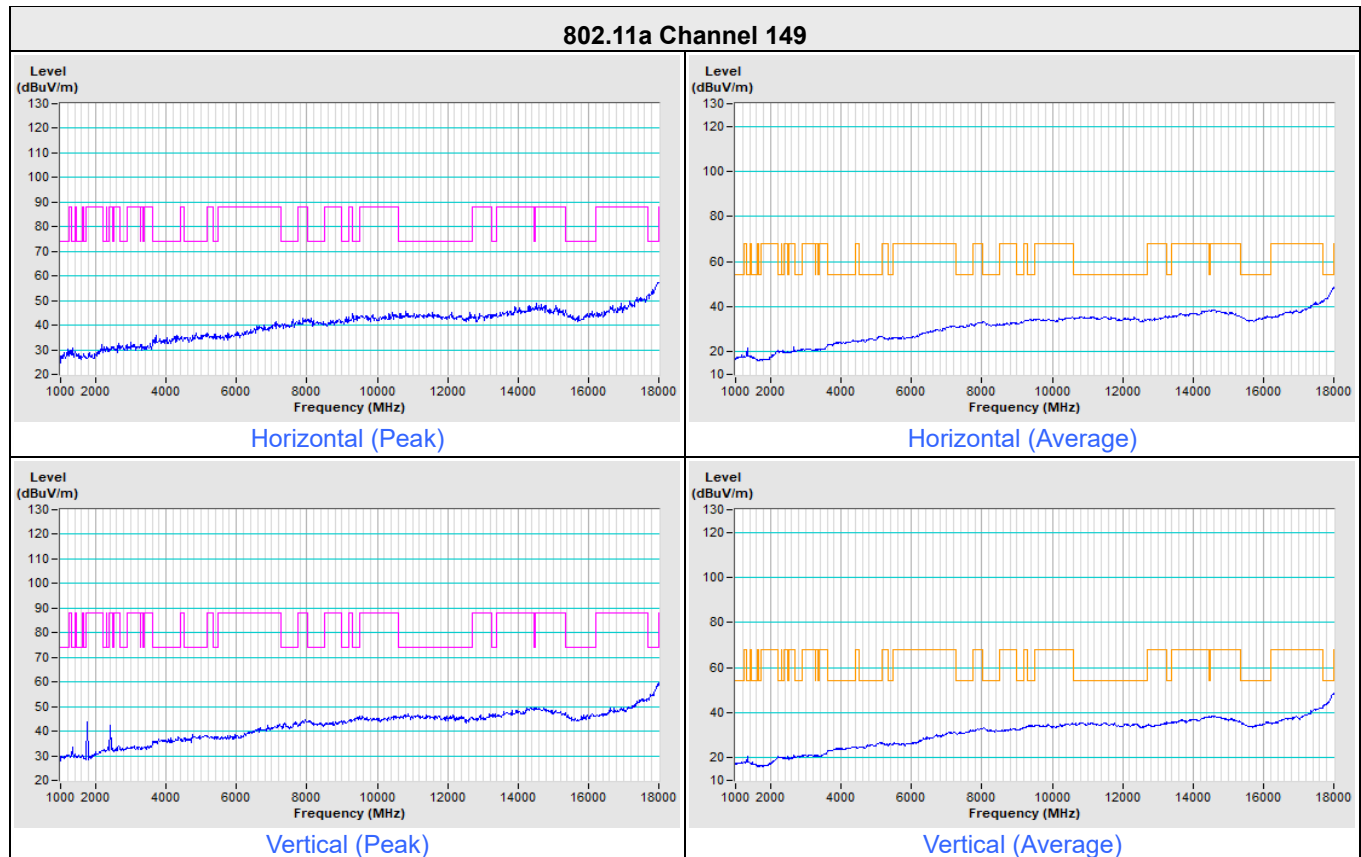

Notes:

- For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
- The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

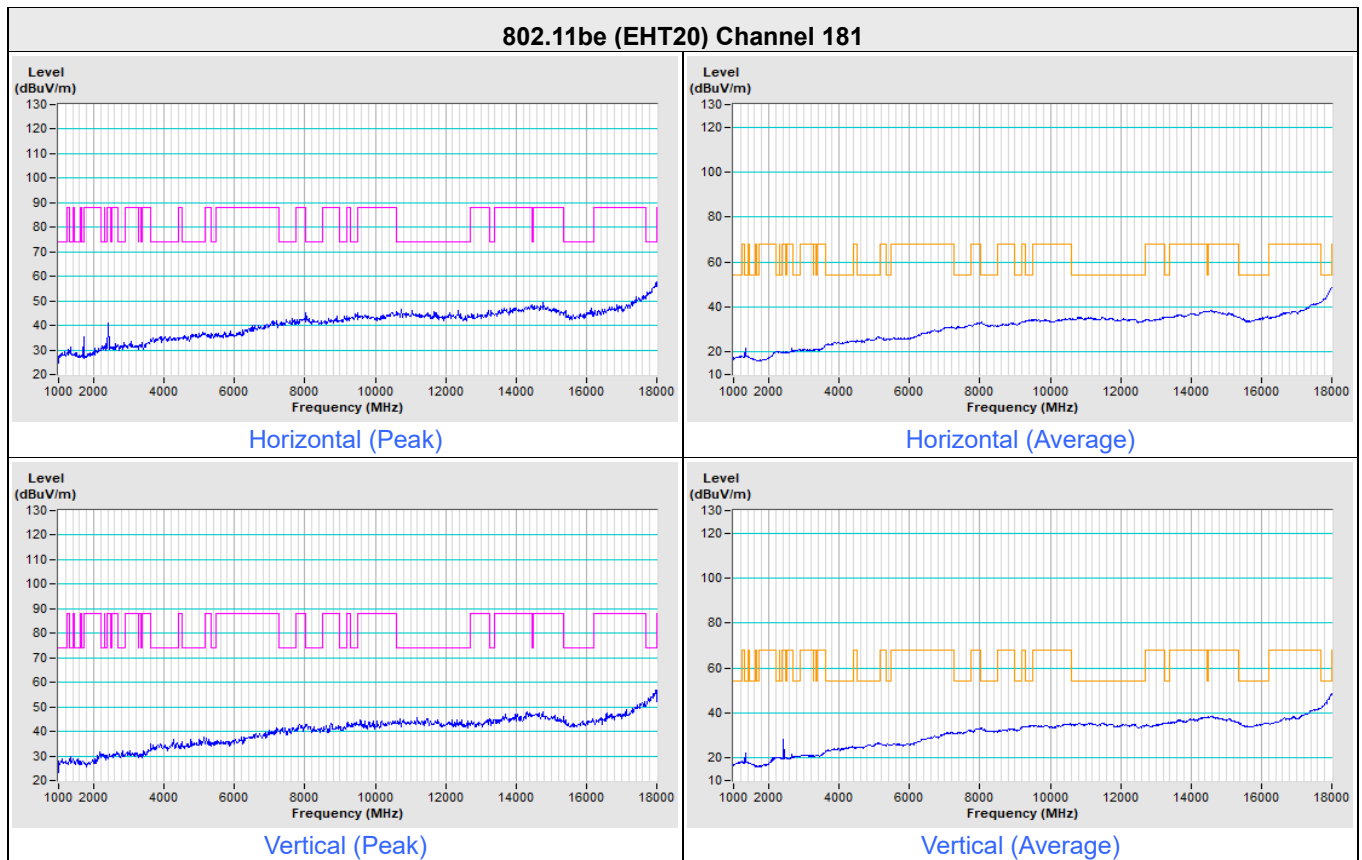

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

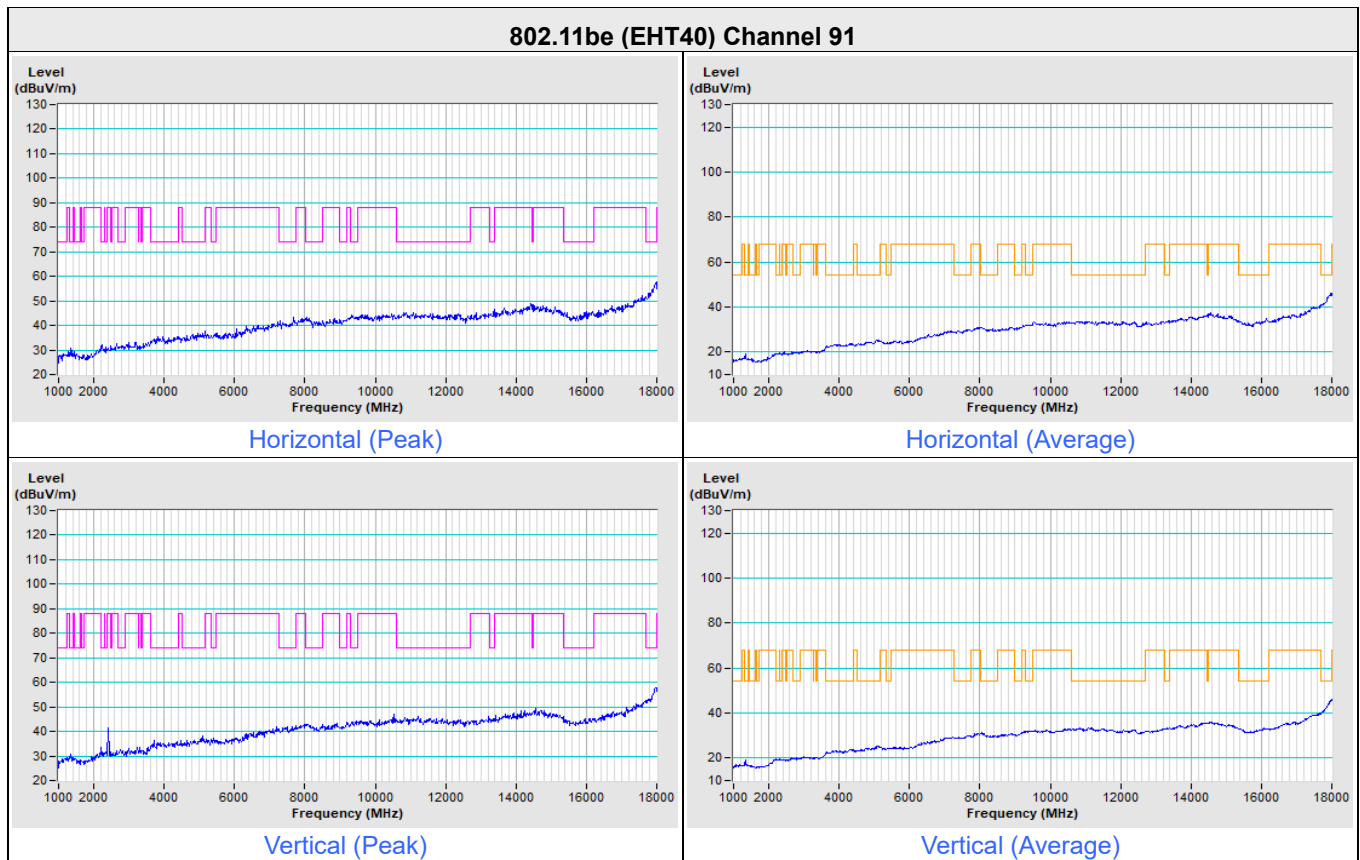

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

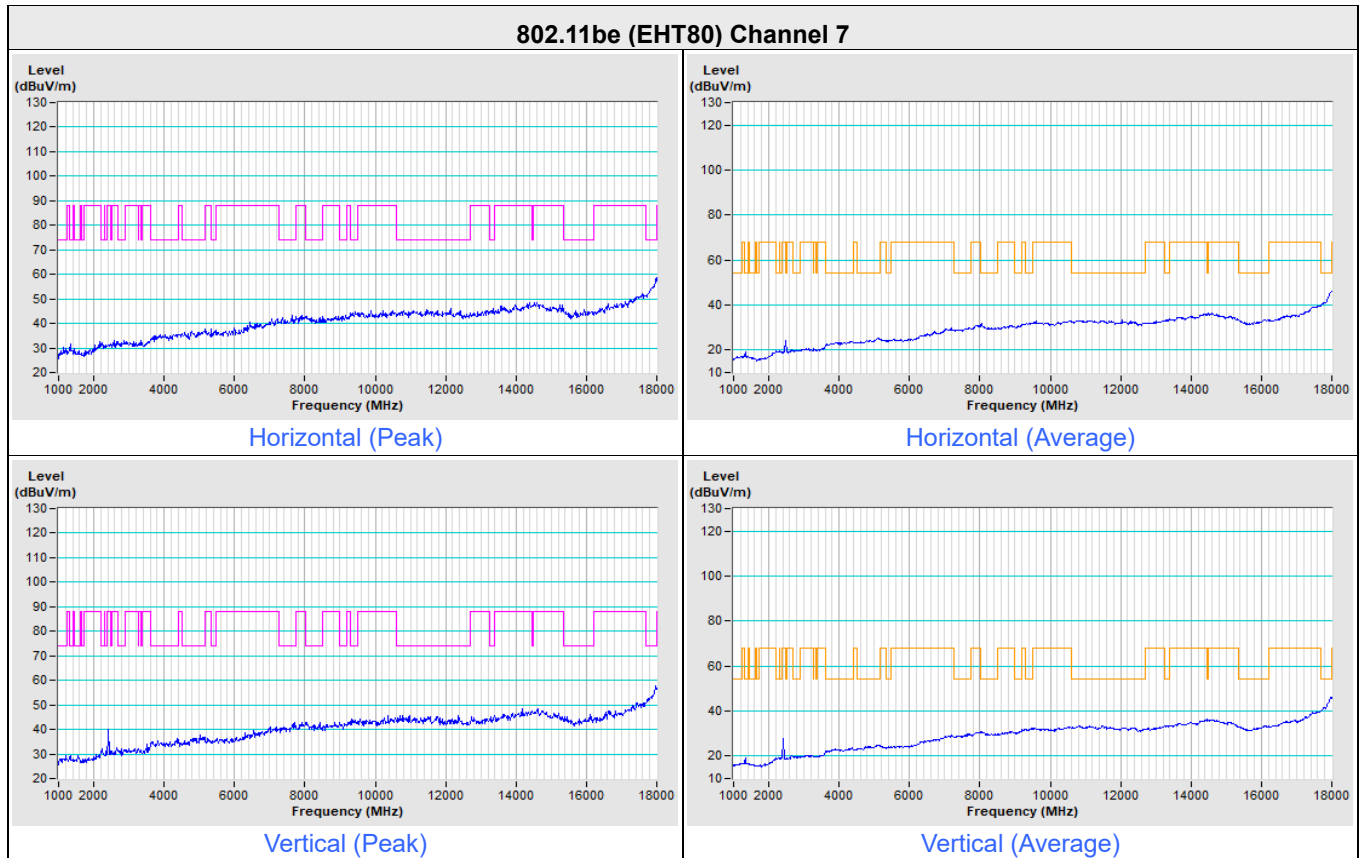

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

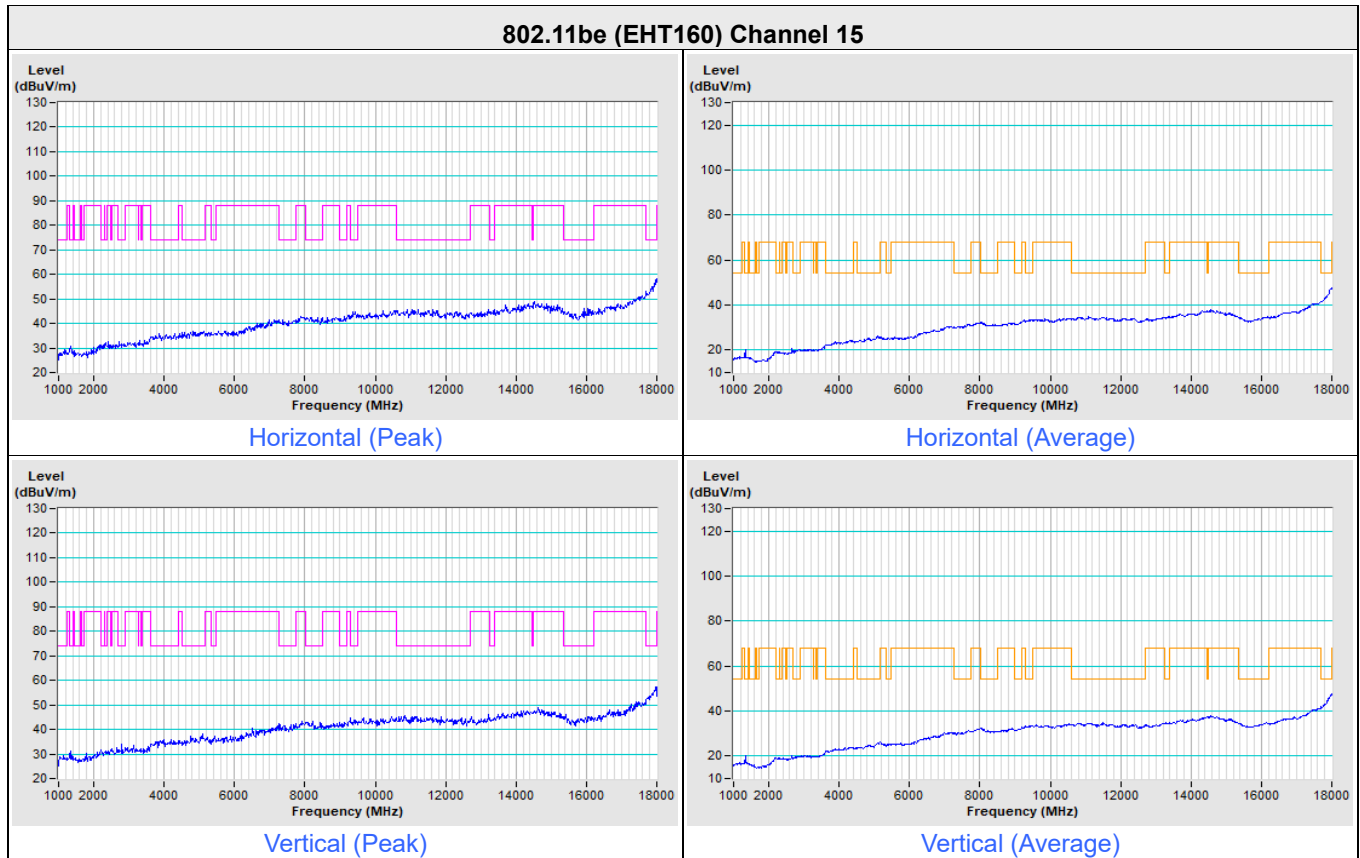

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

7.10 TPC mechanism


Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Cheng
--------------	---------	---------------------------	--------------	------------	------------

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Sensitivity	Conducted PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Test Result
			Chain 0	Chain 1					
175	6825	Low RSSI	-16.23	-16.40	-13.30	4.61	-8.69	-5	Pass
		High RSSI	-24.70	-23.79	-21.21	4.61	-16.6	-11	Pass

Notes: EIRP PSD (dBm/MHz) = Conducted PSD (dBm/MHz) + Directional Gain (dBi)

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
2Tx 11be(WIFI7) BW160+BT/BLE Combo Card	MediaTek	MT7925	5.7.0.6062

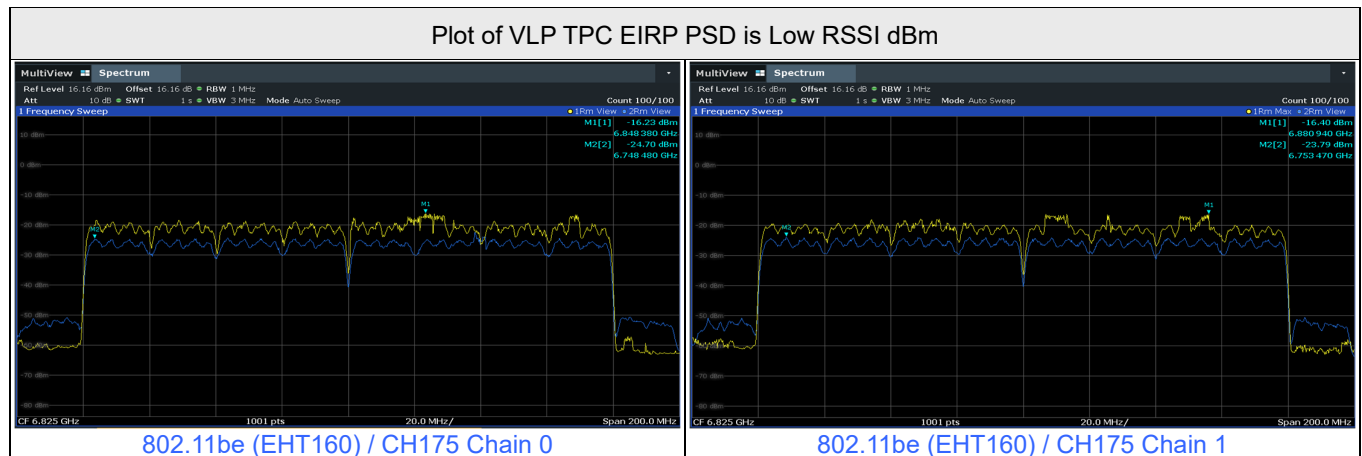

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety/SAR Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---