



RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3746.57	44.92 PK	74	-29.08	-55.26	4.92	-50.34
2	3746.57	41.88 AV	54	-12.12	-58.3	4.92	-53.38
3	10923.64	43.98 PK	74	-30.02	-56.2	4.92	-51.28
4	10923.64	40.2 AV	54	-13.8	-59.98	4.92	-55.06
5	18845	45.77 PK	74	-28.23	-54.41	4.92	-49.49
6	18845	41.54 AV	54	-12.46	-58.64	4.92	-53.72
7	22806.9	44.93 PK	74	-29.07	-55.25	4.92	-50.33
8	22806.9	43.27 AV	54	-10.73	-56.91	4.92	-51.99
9	38638.31	39.85 PK	74	-34.15	-60.33	4.92	-55.41
10	38638.31	33.72 AV	54	-20.28	-66.46	4.92	-61.54

Note: Margin value = Emission Level - Limit value

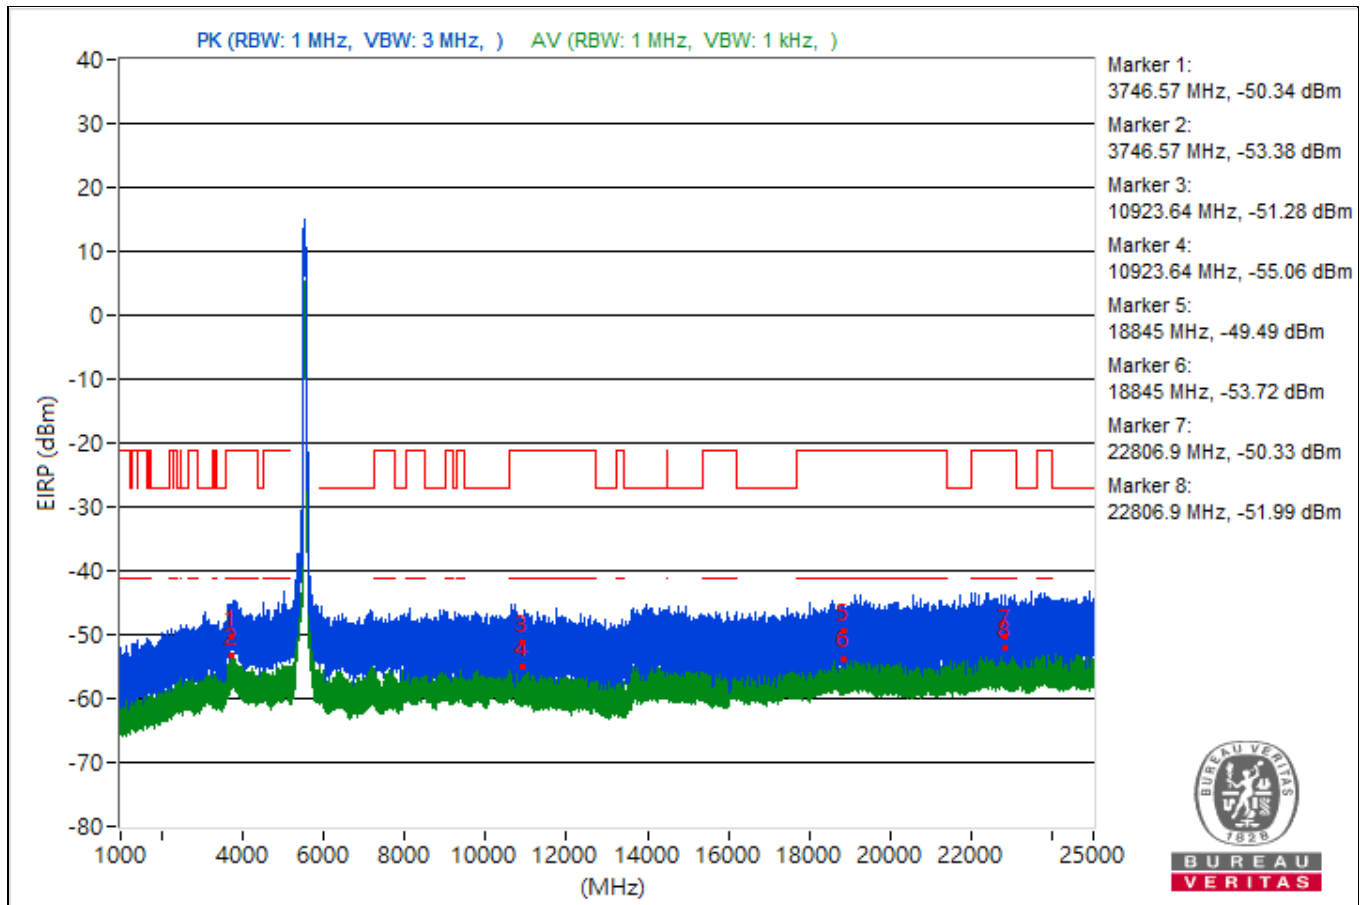


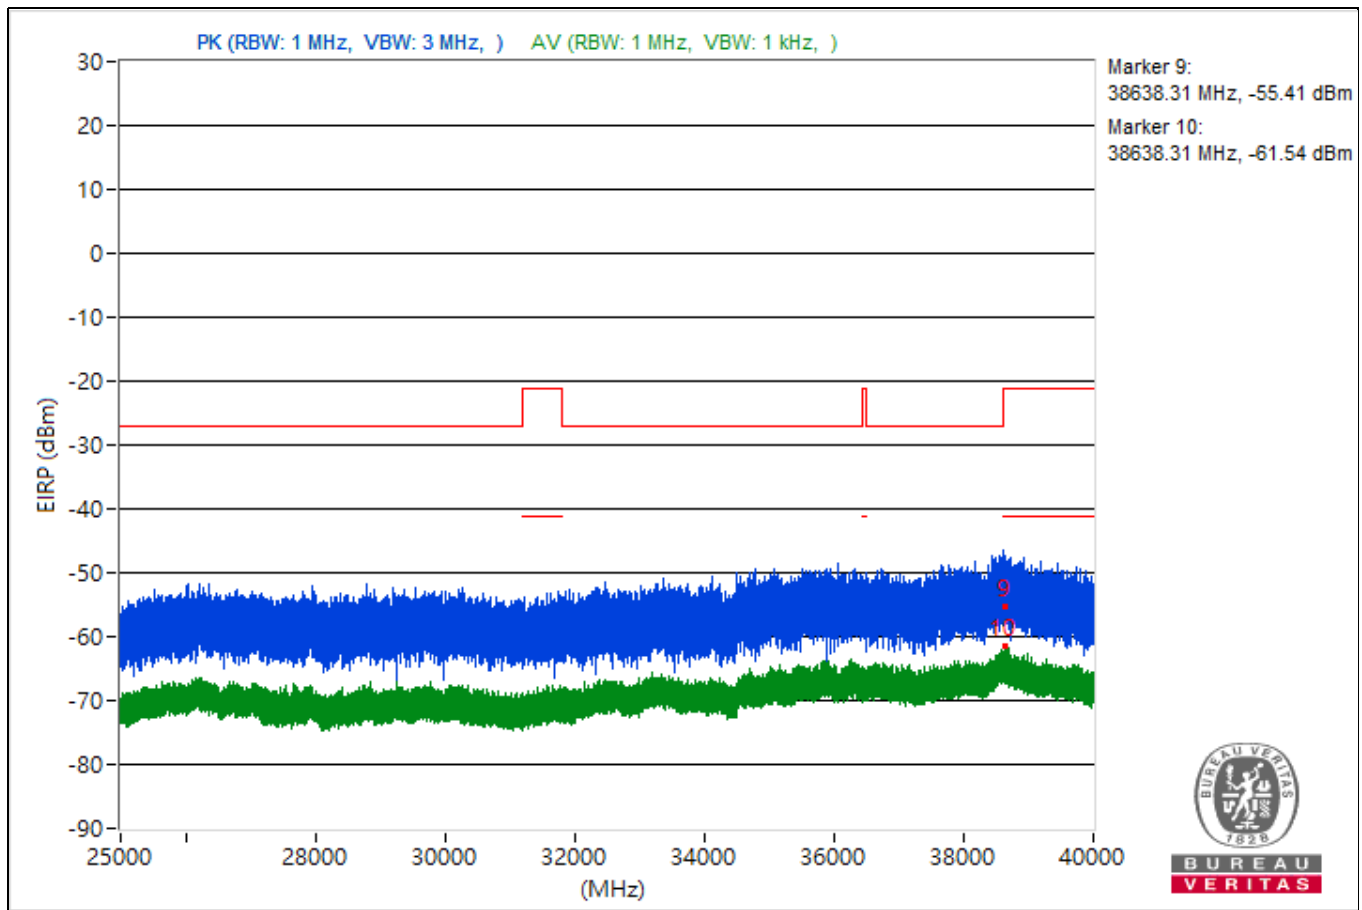


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3753.02	44.73 PK	74	-29.27	-55.45	4.92	-50.53
2	3753.02	41.75 AV	54	-12.25	-58.43	4.92	-53.51
3	8463.73	41.71 PK	74	-32.29	-58.47	4.92	-53.55
4	8463.73	40.3 AV	54	-13.7	-59.88	4.92	-54.96
5	18995.6	45.38 PK	74	-28.62	-54.8	4.92	-49.88
6	18995.6	41.77 AV	54	-12.23	-58.41	4.92	-53.49
7	22481.8	45.02 PK	74	-28.98	-55.16	4.92	-50.24
8	22481.8	42.99 AV	54	-11.01	-57.19	4.92	-52.27
9	38625.07	43.26 PK	74	-30.74	-56.92	4.92	-52
10	38625.07	33.24 AV	54	-20.76	-66.94	4.92	-62.02

Note: Margin value = Emission Level - Limit value

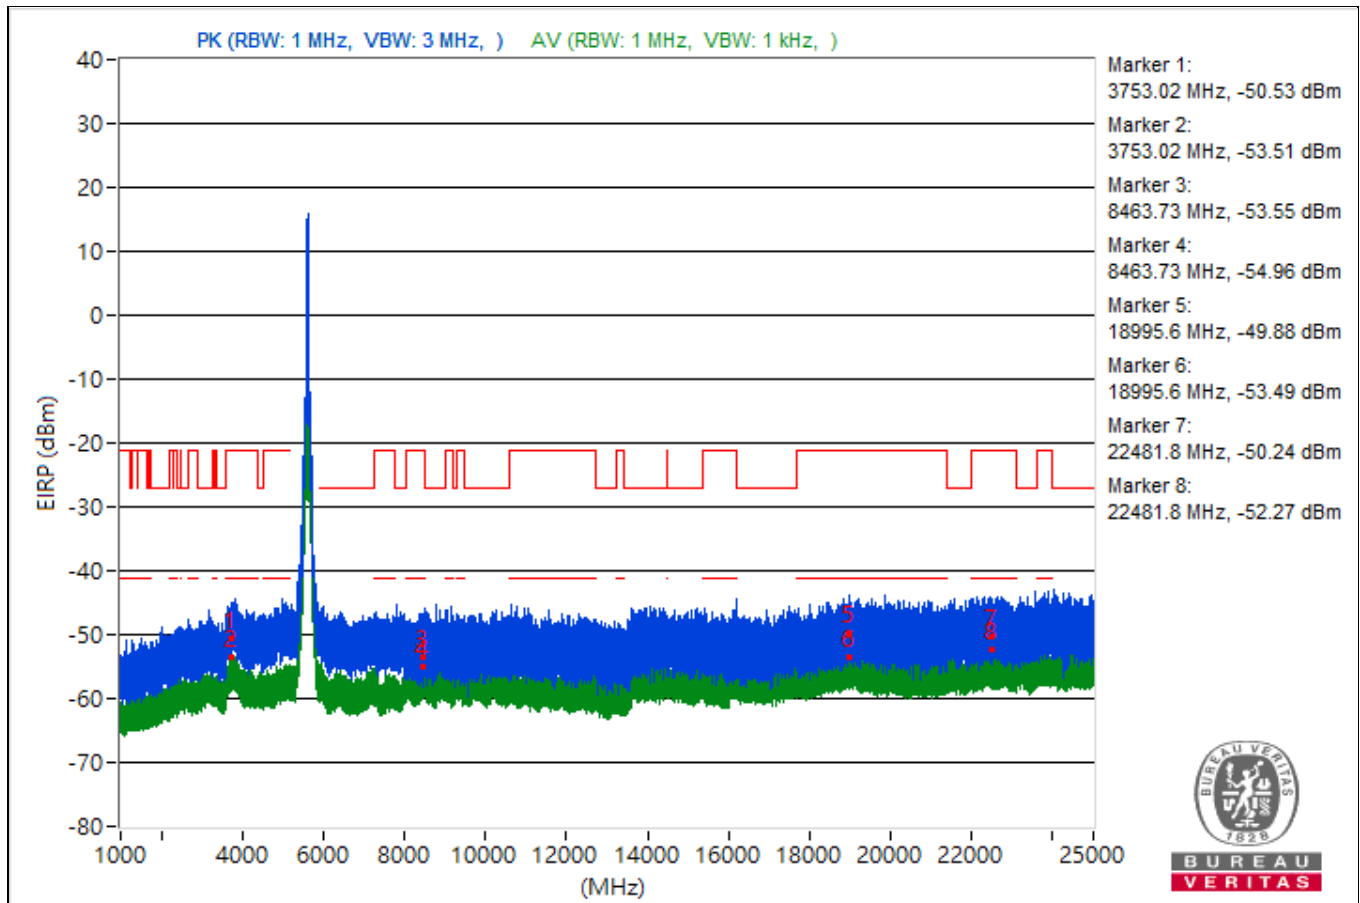


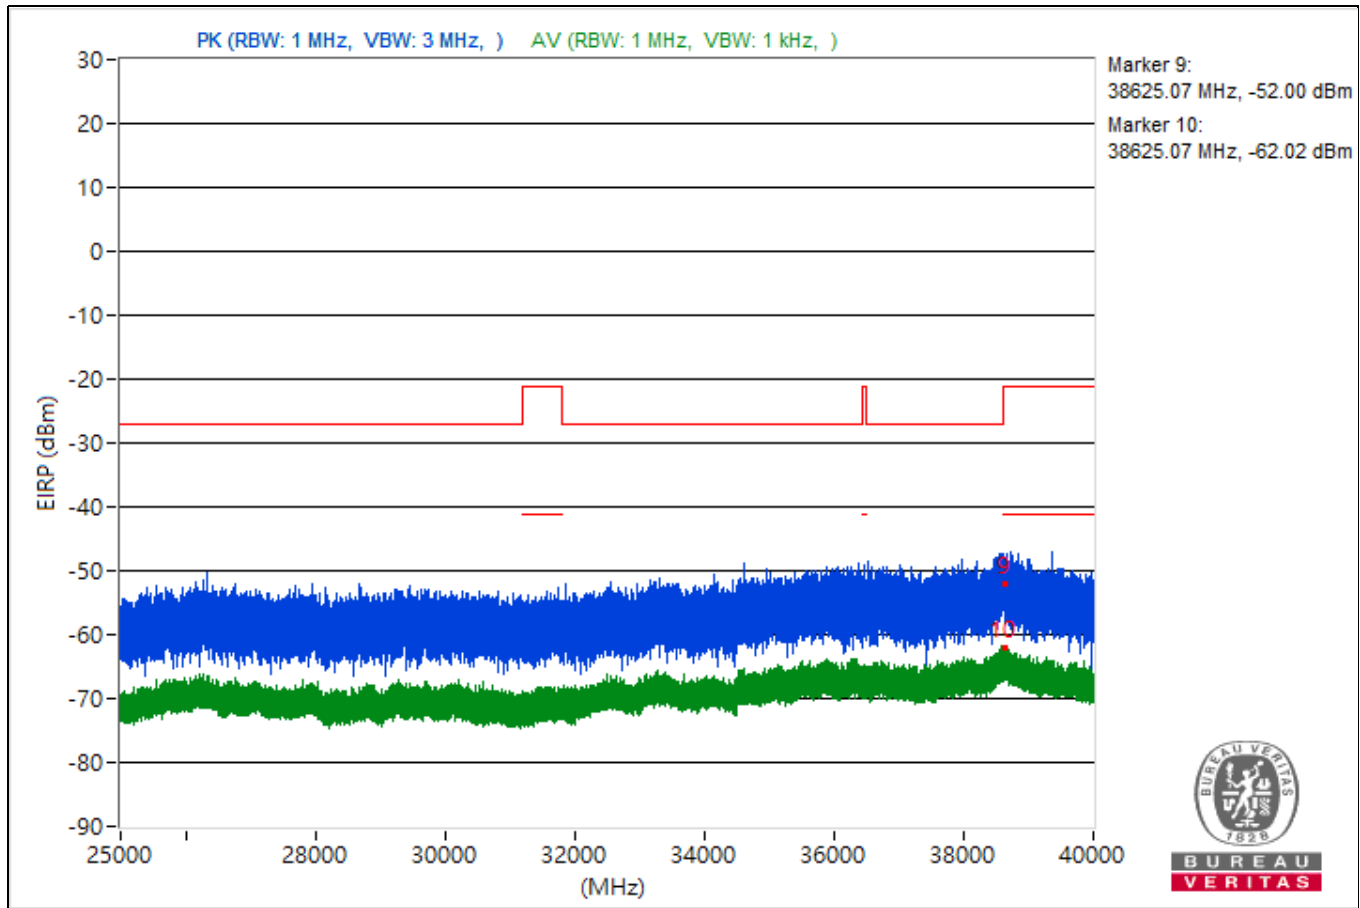


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3759.01	47.11 PK	74	-26.89	-53.07	4.92	-48.15
2	3759.01	41.57 AV	54	-12.43	-58.61	4.92	-53.69
3	11060.09	43.99 PK	74	-30.01	-56.19	4.92	-51.27
4	11060.09	40.51 AV	54	-13.49	-59.67	4.92	-54.75
5	18853.1	44.95 PK	74	-29.05	-55.23	4.92	-50.31
6	18853.1	41.88 AV	54	-12.12	-58.3	4.92	-53.38
7	22425.6	44.82 PK	74	-29.18	-55.36	4.92	-50.44
8	22425.6	42.9 AV	54	-11.1	-57.28	4.92	-52.36
9	38605.78	43.6 PK	74	-30.4	-56.58	4.92	-51.66
10	38605.78	33.29 AV	54	-20.71	-66.89	4.92	-61.97

Note: Margin value = Emission Level - Limit value

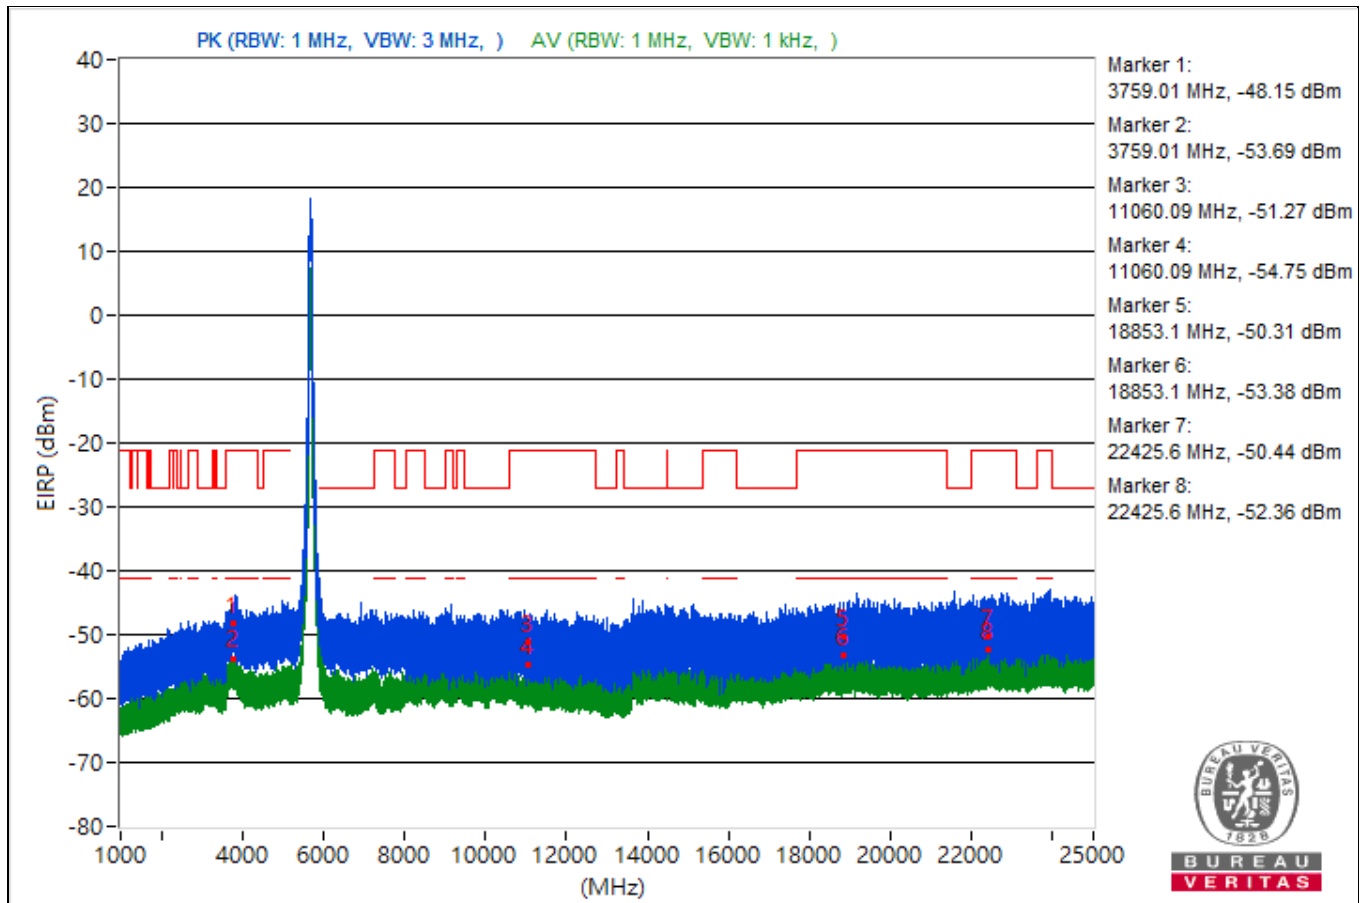


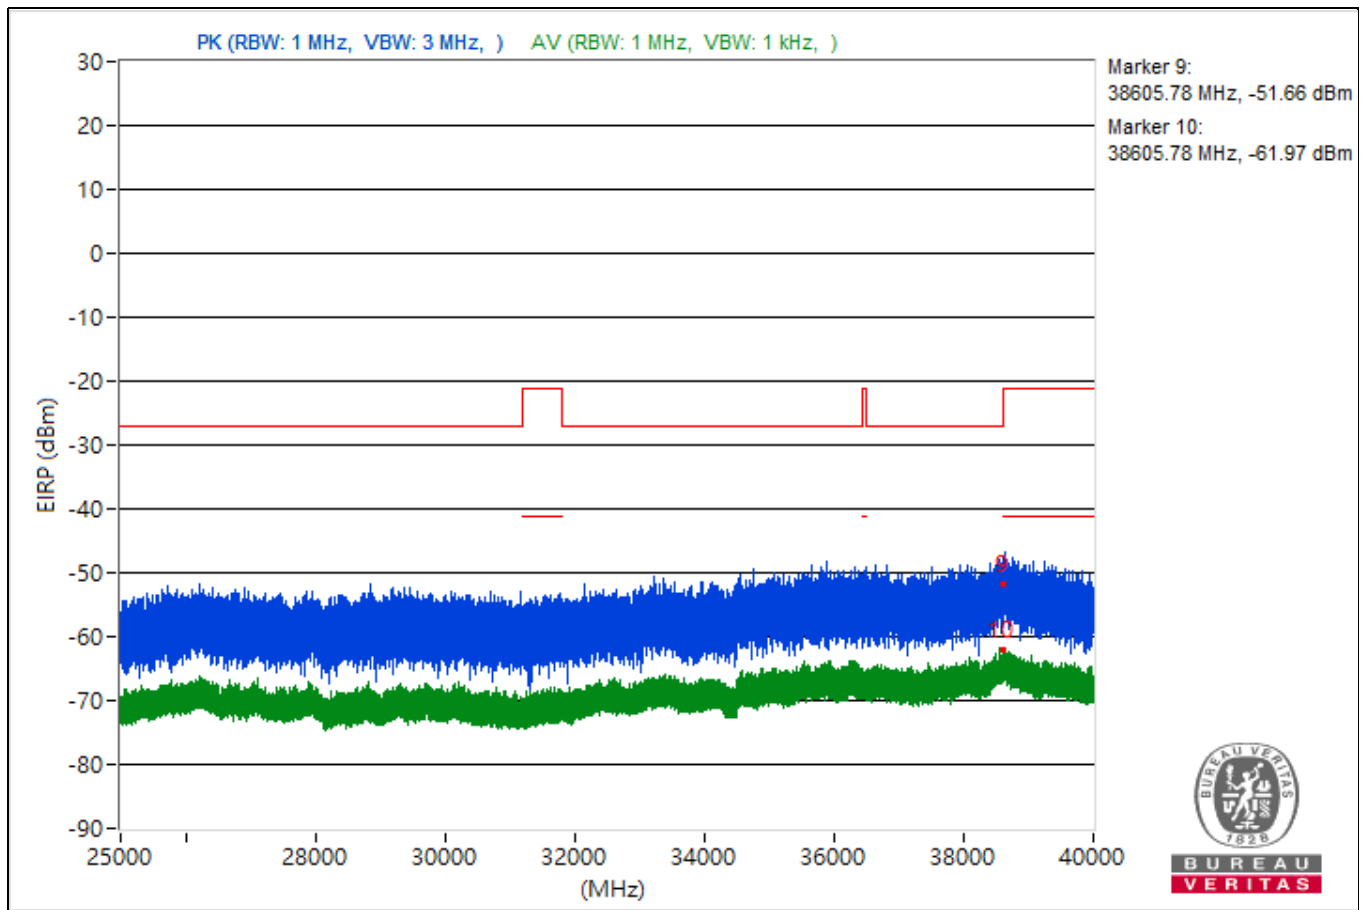


RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.7	51.51 PK	74	-22.49	-48.67	4.92	-43.75
2	3814.7	41.47 AV	54	-12.53	-58.71	4.92	-53.79
3	10628.98	44.49 PK	74	-29.51	-55.69	4.92	-50.77
4	10628.98	40.35 AV	54	-13.65	-59.83	4.92	-54.91
5	18742.1	45.51 PK	74	-28.49	-54.67	4.92	-49.75
6	18742.1	41.54 AV	54	-12.46	-58.64	4.92	-53.72
7	23697.6	43.91 PK	74	-30.09	-56.27	4.92	-51.35
8	23697.6	43.49 AV	54	-10.51	-56.69	4.92	-51.77
9	38636.53	44.62 PK	74	-29.38	-55.56	4.92	-50.64
10	38636.53	33.49 AV	54	-20.51	-66.69	4.92	-61.77

Note: Margin value = Emission Level - Limit value

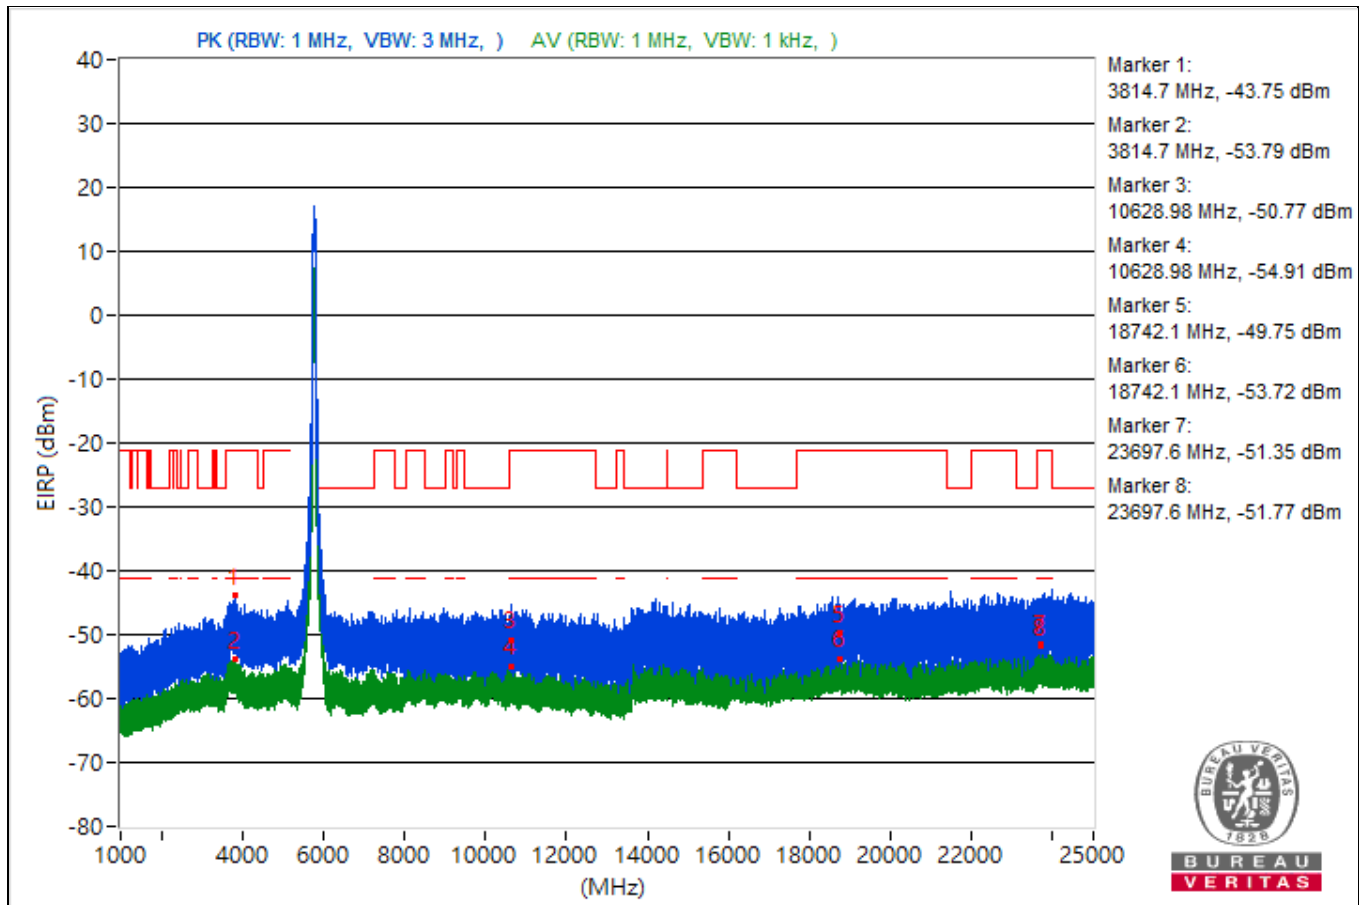


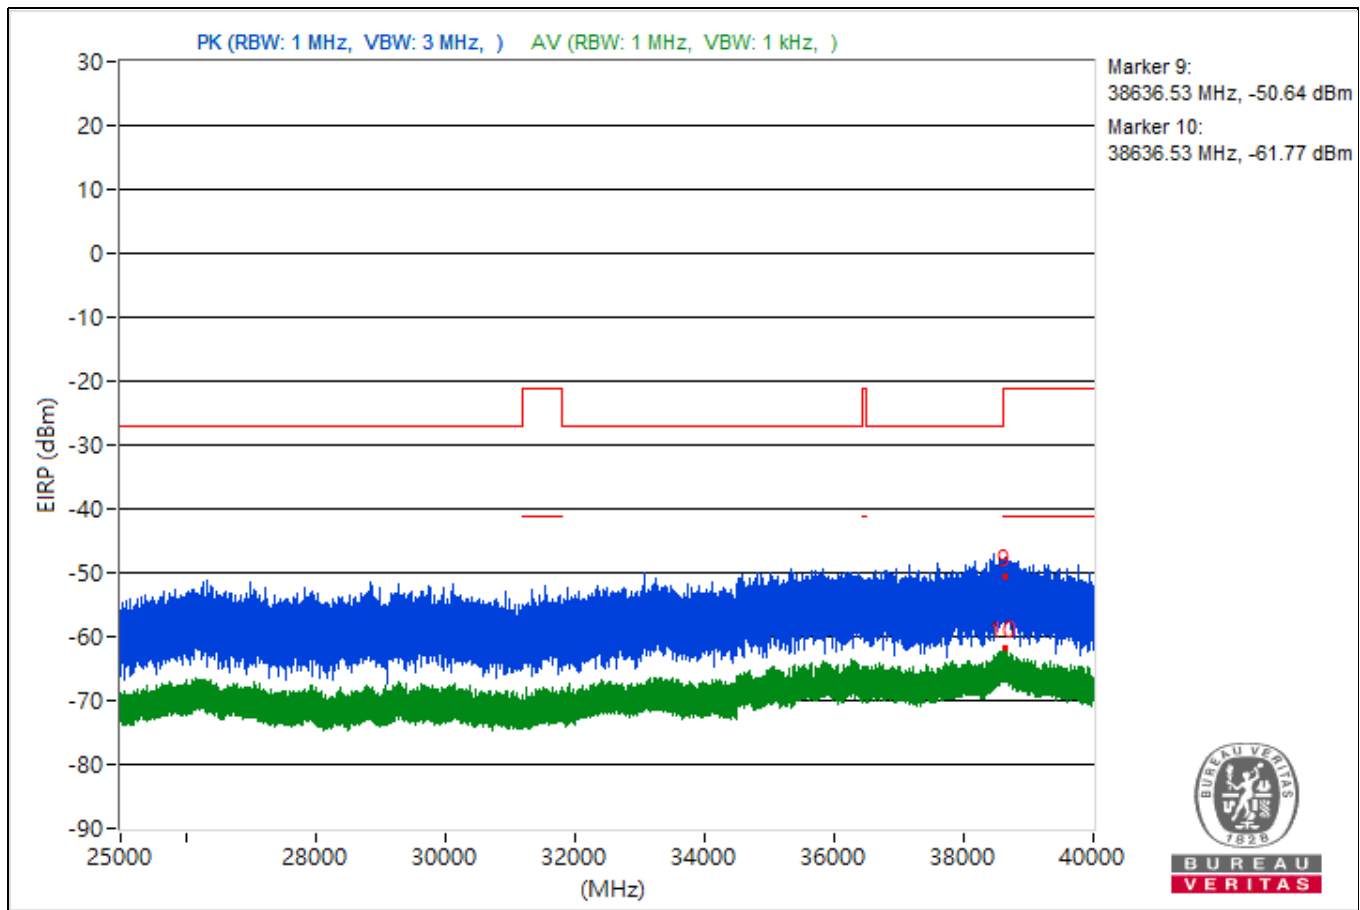


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5073.84	57.12 PK	74	-16.88	-43.06	4.92	-38.14
2	5073.84	50.95 AV	54	-3.05	-49.23	4.92	-44.31
3	9326.31	44.98 PK	74	-29.02	-55.2	4.92	-50.28
4	9326.31	40.51 AV	54	-13.49	-59.67	4.92	-54.75
5	18954.3	46.29 PK	74	-27.71	-53.89	4.92	-48.97
6	18954.3	41.69 AV	54	-12.31	-58.49	4.92	-53.57
7	22309.1	45.72 PK	74	-28.28	-54.46	4.92	-49.54
8	22309.1	43.28 AV	54	-10.72	-56.9	4.92	-51.98
9	38658.04	42.31 PK	74	-31.69	-57.87	4.92	-52.95
10	38658.04	33.11 AV	54	-20.89	-67.07	4.92	-62.15

Note: Margin value = Emission Level - Limit value

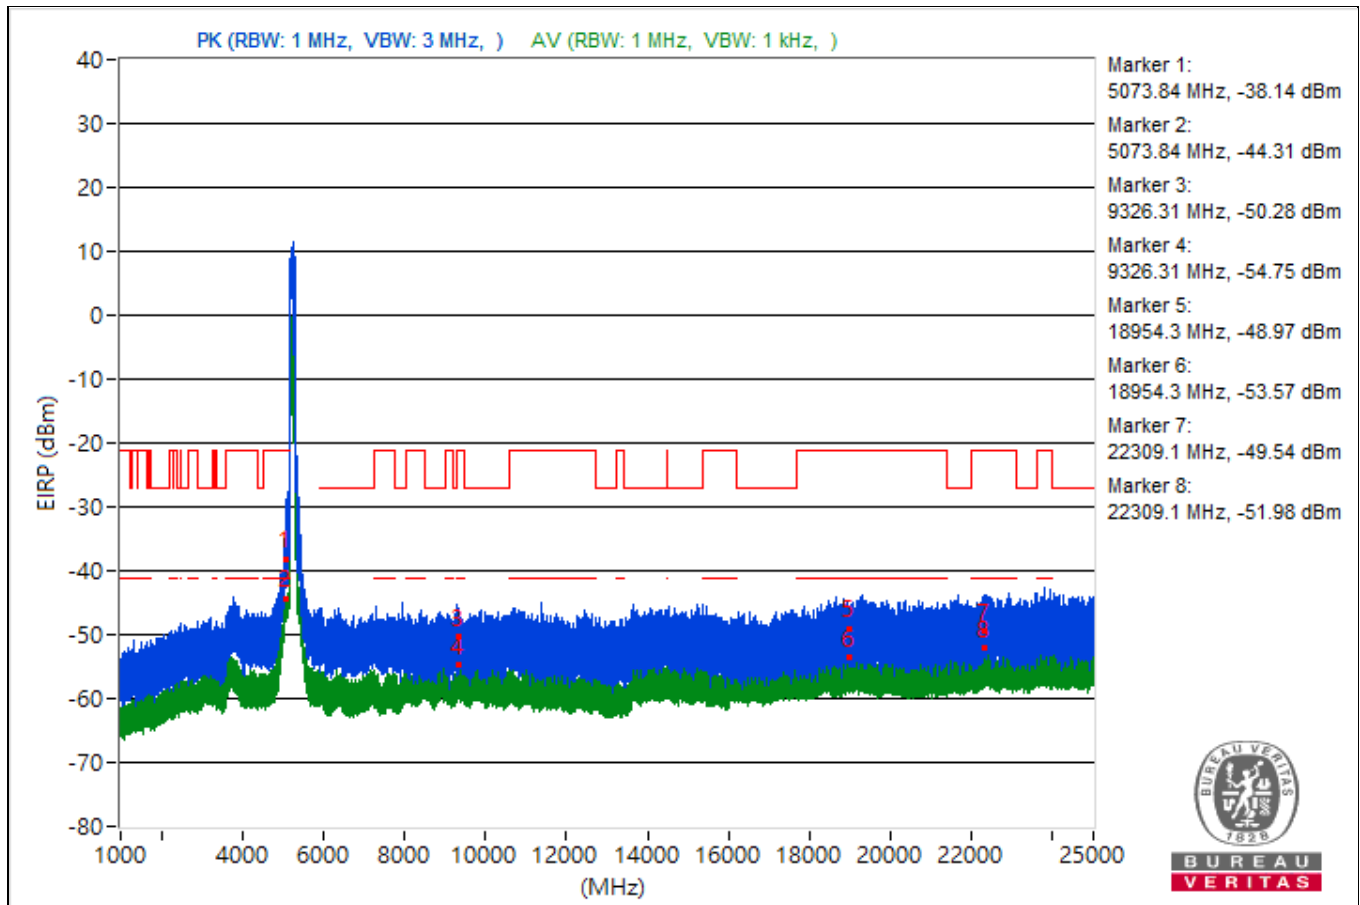


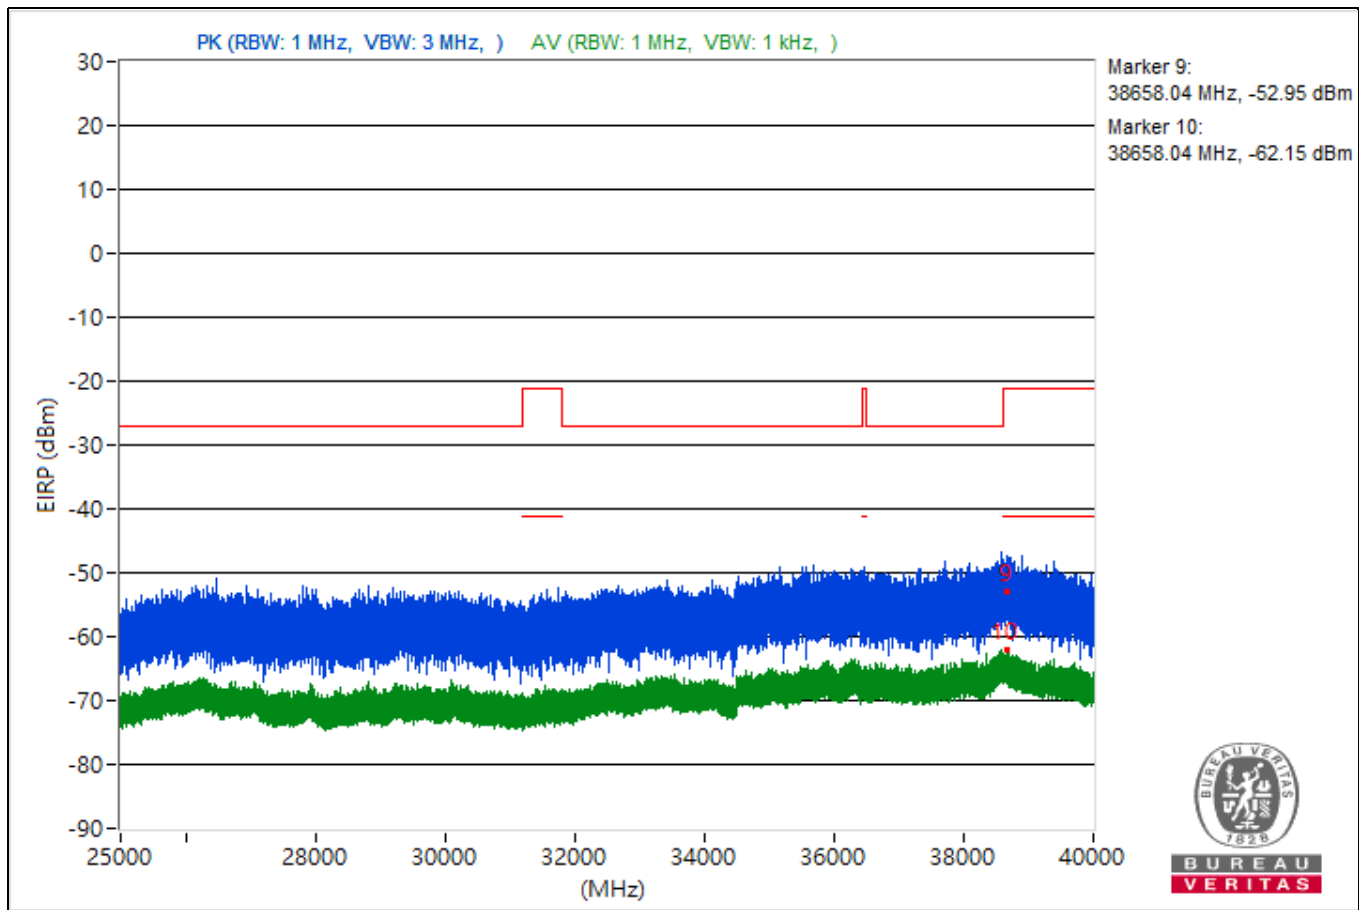


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.4	41.89 PK	74	-32.11	-58.29	4.92	-53.37
2	3787.4	41.59 AV	54	-12.41	-58.59	4.92	-53.67
3	9327.38	41.4 PK	74	-32.6	-58.78	4.92	-53.86
4	9327.38	40.17 AV	54	-13.83	-60.01	4.92	-55.09
5	18643.7	44.15 PK	74	-29.85	-56.03	4.92	-51.11
6	18643.7	41.27 AV	54	-12.73	-58.91	4.92	-53.99
7	22930.6	44.95 PK	74	-29.05	-55.23	4.92	-50.31
8	22930.6	42.75 AV	54	-11.25	-57.43	4.92	-52.51
9	38626.93	43.84 PK	74	-30.16	-56.34	4.92	-51.42
10	38626.93	32.9 AV	54	-21.1	-67.28	4.92	-62.36

Note: Margin value = Emission Level - Limit value

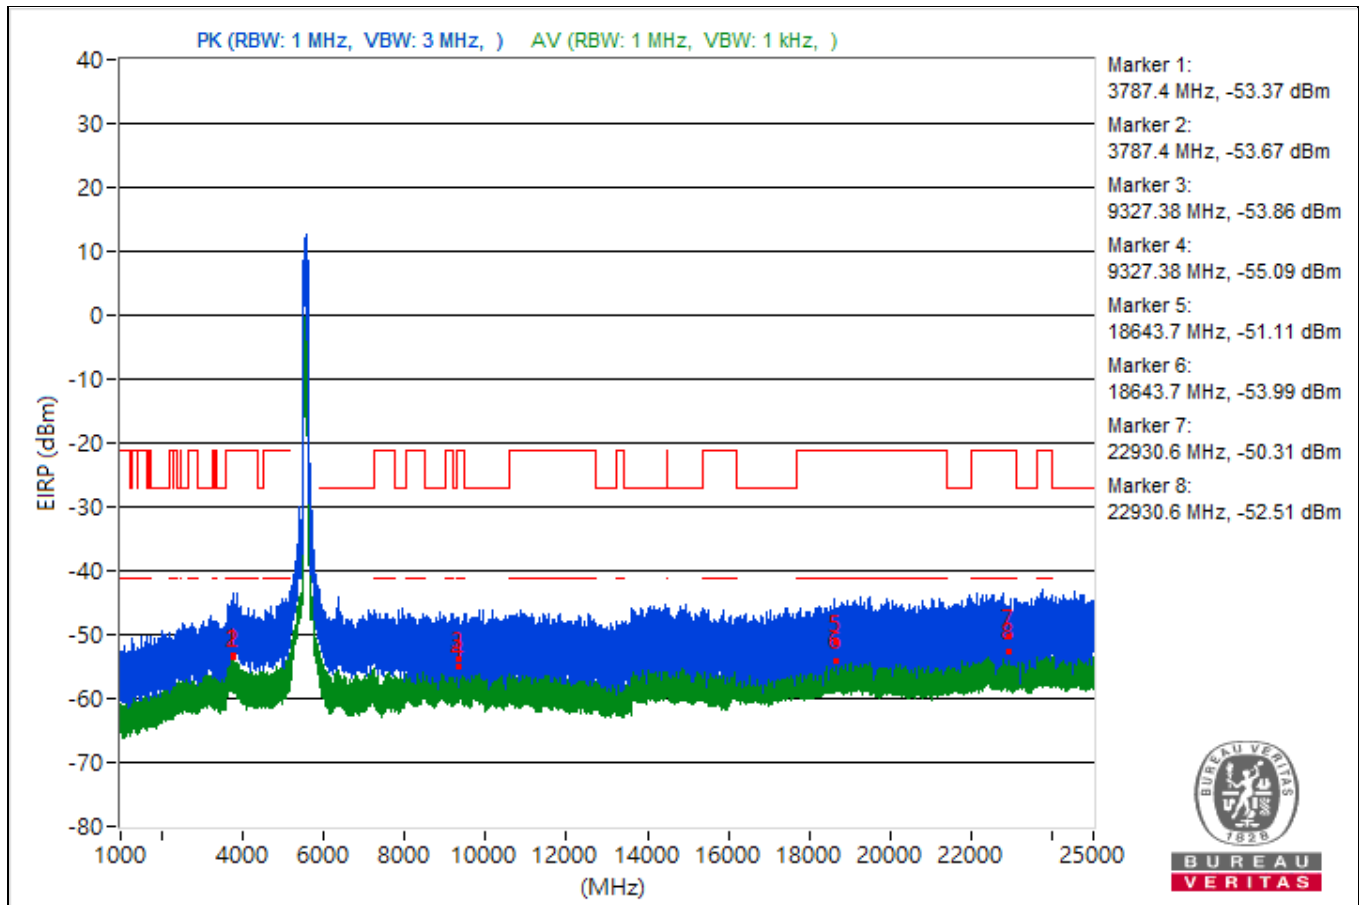


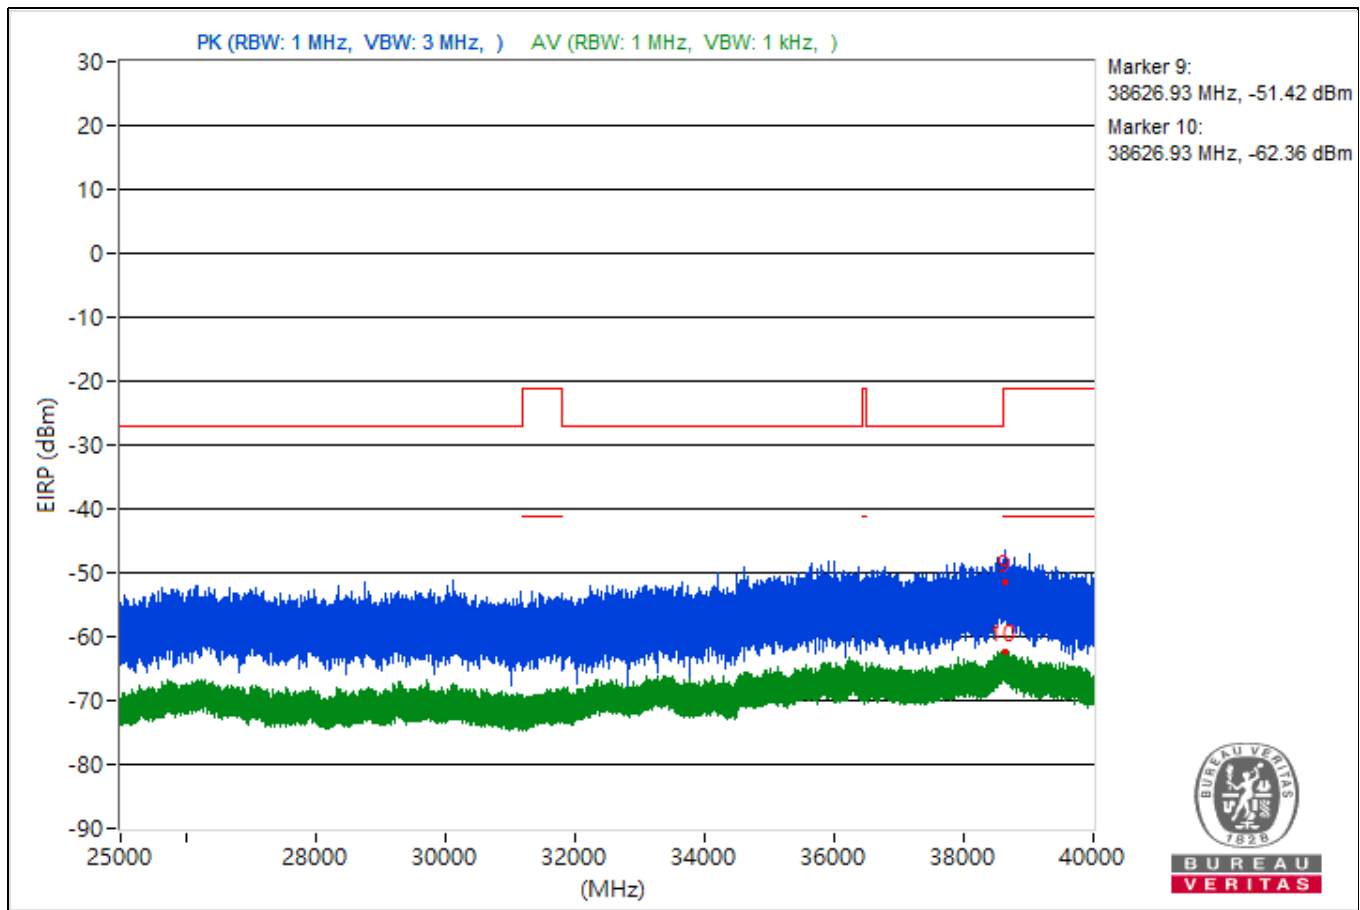


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5094.92	51.9 PK	74	-22.1	-48.28	4.92	-43.36
2	5094.92	42.7 AV	54	-11.3	-57.48	4.92	-52.56
3	8039.2	49.51 PK	74	-24.49	-50.67	4.92	-45.75
4	8039.2	41.08 AV	54	-12.92	-59.1	4.92	-54.18
5	18981.7	52.53 PK	74	-21.47	-47.65	4.92	-42.73
6	18981.7	41.67 AV	54	-12.33	-58.51	4.92	-53.59
7	23953.6	56.25 PK	74	-17.75	-43.93	4.92	-39.01
8	23953.6	43.15 AV	54	-10.85	-57.03	4.92	-52.11
9	38789.24	60.7 PK	74	-13.3	-39.48	4.92	-34.56
10	38789.24	48.63 AV	54	-5.37	-51.55	4.92	-46.63

Note: Margin value = Emission Level - Limit value

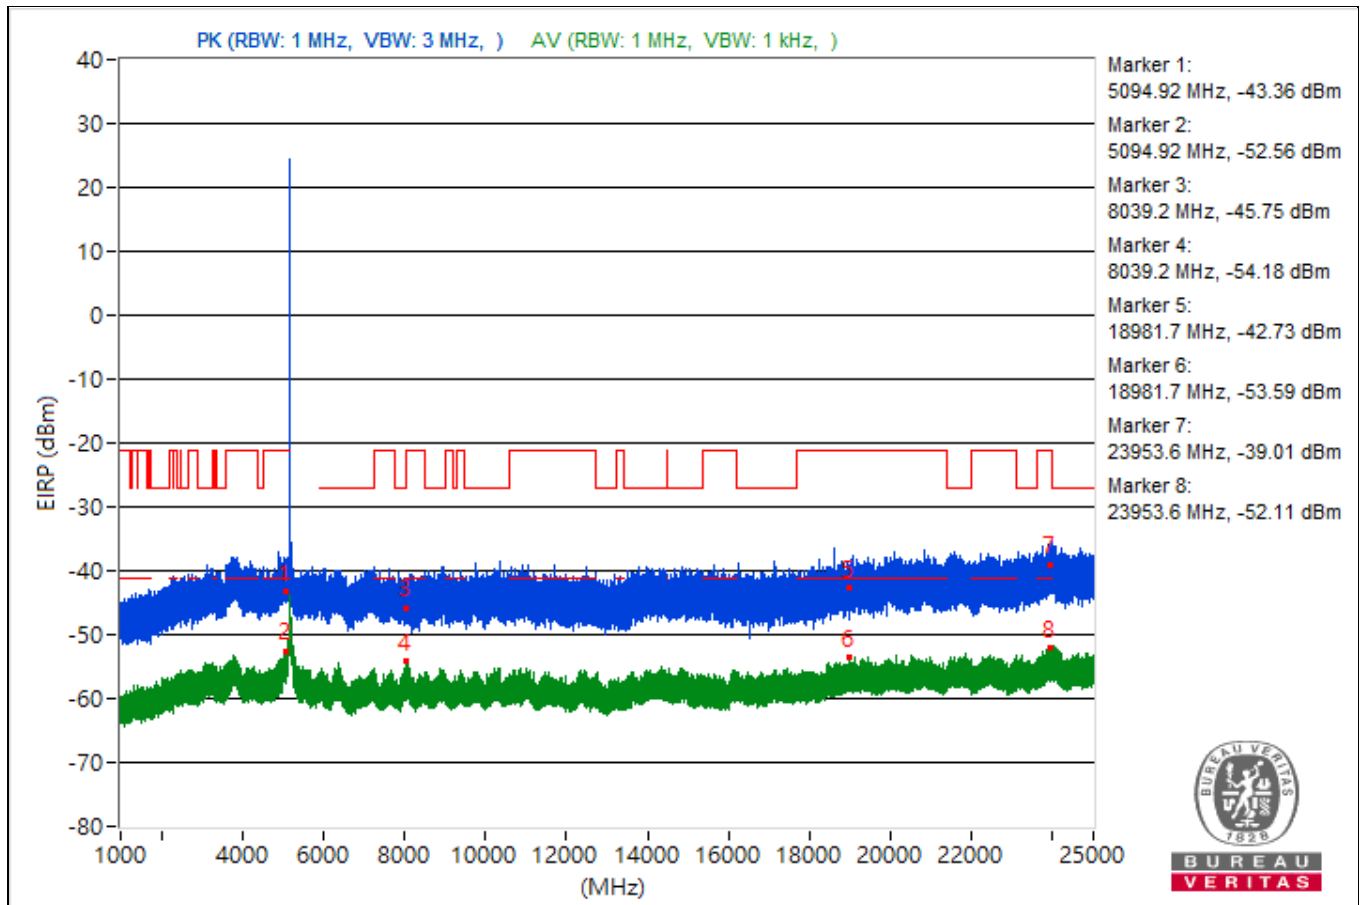


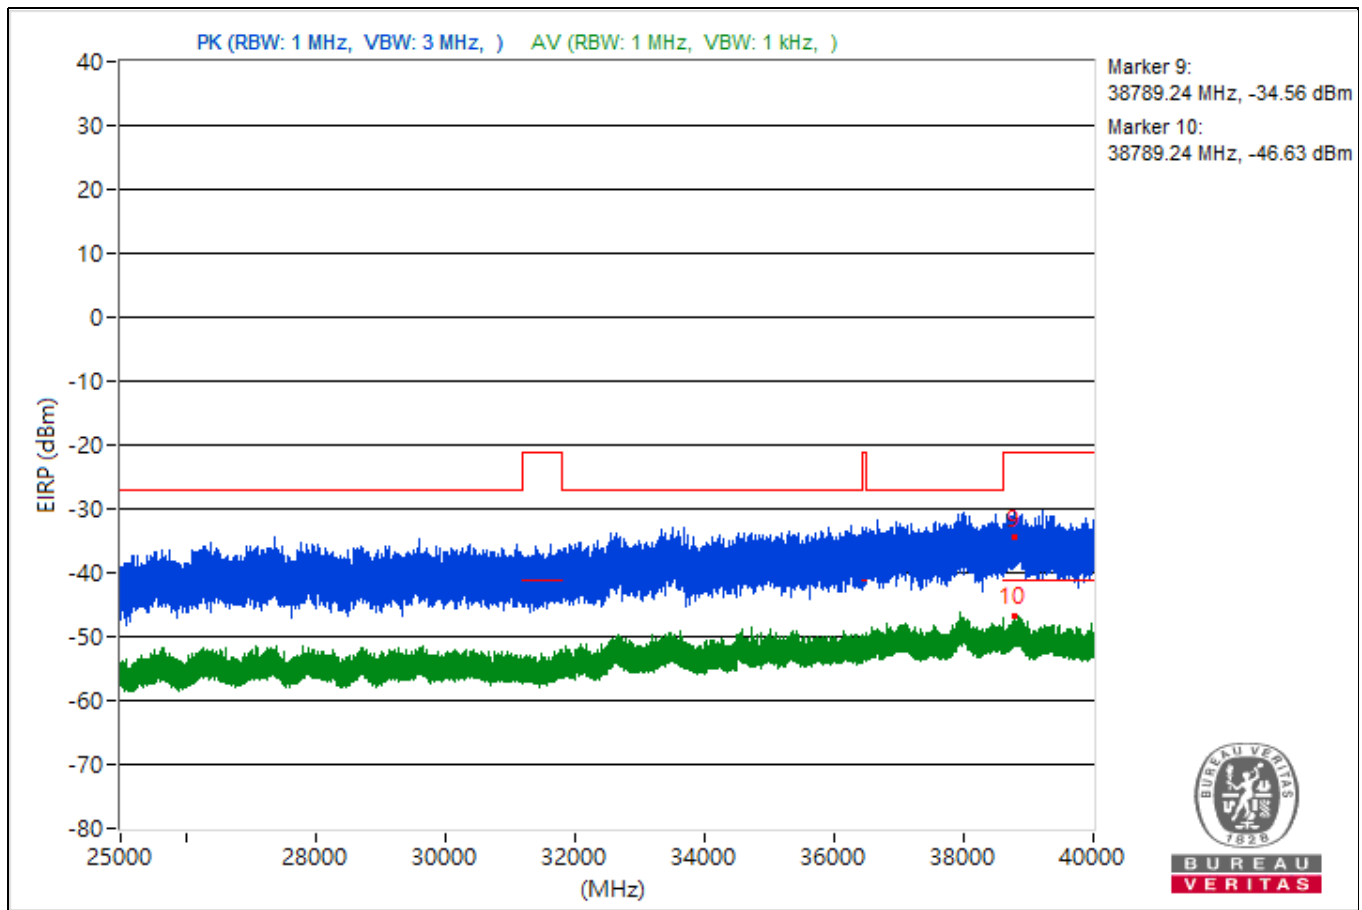


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5051.52	53.16 PK	74	-20.84	-47.02	4.92	-42.1
2	5051.52	42.33 AV	54	-11.67	-57.85	4.92	-52.93
3	8087.91	51.05 PK	74	-22.95	-49.13	4.92	-44.21
4	8087.91	40.43 AV	54	-13.57	-59.75	4.92	-54.83
5	18604.5	51.07 PK	74	-22.93	-49.11	4.92	-44.19
6	18604.5	41.29 AV	54	-12.71	-58.89	4.92	-53.97
7	23933.7	55.67 PK	74	-18.33	-44.51	4.92	-39.59
8	23933.7	43.42 AV	54	-10.58	-56.76	4.92	-51.84
9	38756.62	58.89 PK	74	-15.11	-41.29	4.92	-36.37
10	38756.62	48.68 AV	54	-5.32	-51.5	4.92	-46.58

Note: Margin value = Emission Level - Limit value

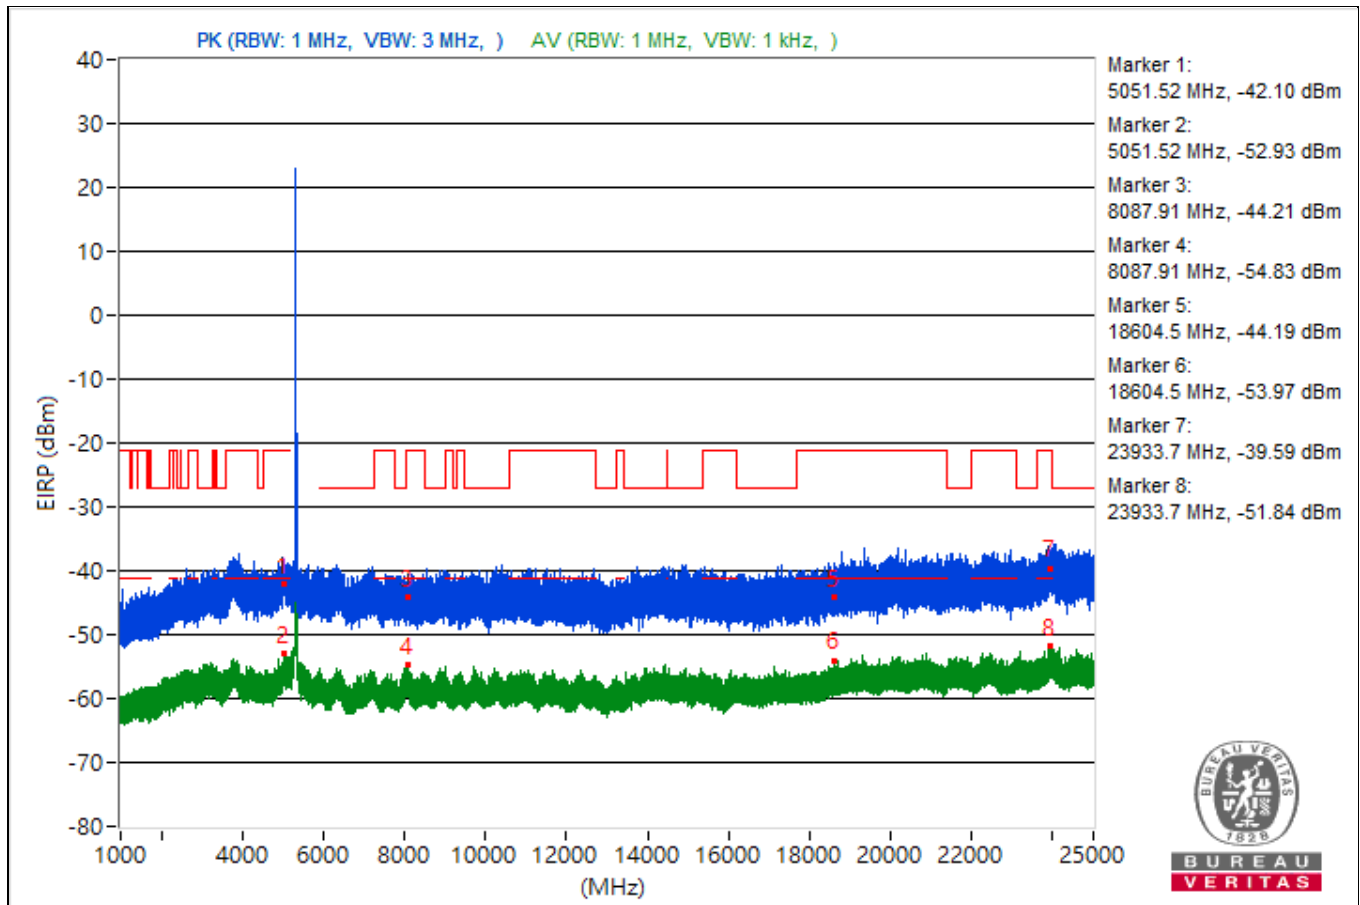


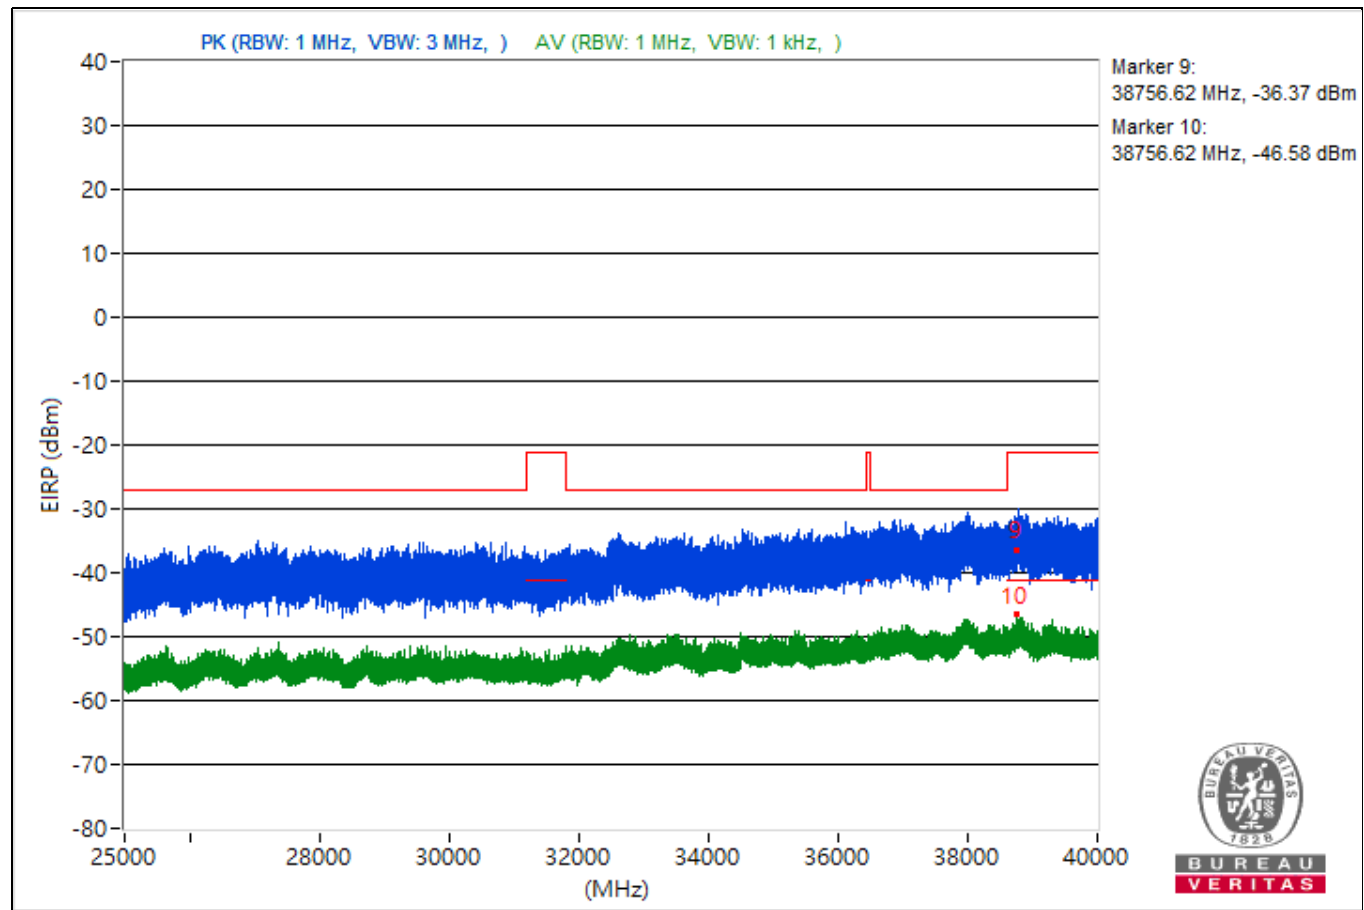


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3860.98	54.56 PK	74	-19.44	-45.62	4.92	-40.7
2	3860.98	41.97 AV	54	-12.03	-58.21	4.92	-53.29
3	8097.96	49.77 PK	74	-24.23	-50.41	4.92	-45.49
4	8097.96	40.96 AV	54	-13.04	-59.22	4.92	-54.3
5	18966.3	51.98 PK	74	-22.02	-48.2	4.92	-43.28
6	18966.3	40.67 AV	54	-13.33	-59.51	4.92	-54.59
7	23894	55.36 PK	74	-18.64	-44.82	4.92	-39.9
8	23894	43.36 AV	54	-10.64	-56.82	4.92	-51.9
9	38902.67	58.01 PK	74	-15.99	-42.17	4.92	-37.25
10	38902.67	48.72 AV	54	-5.28	-51.46	4.92	-46.54

Note: Margin value = Emission Level - Limit value

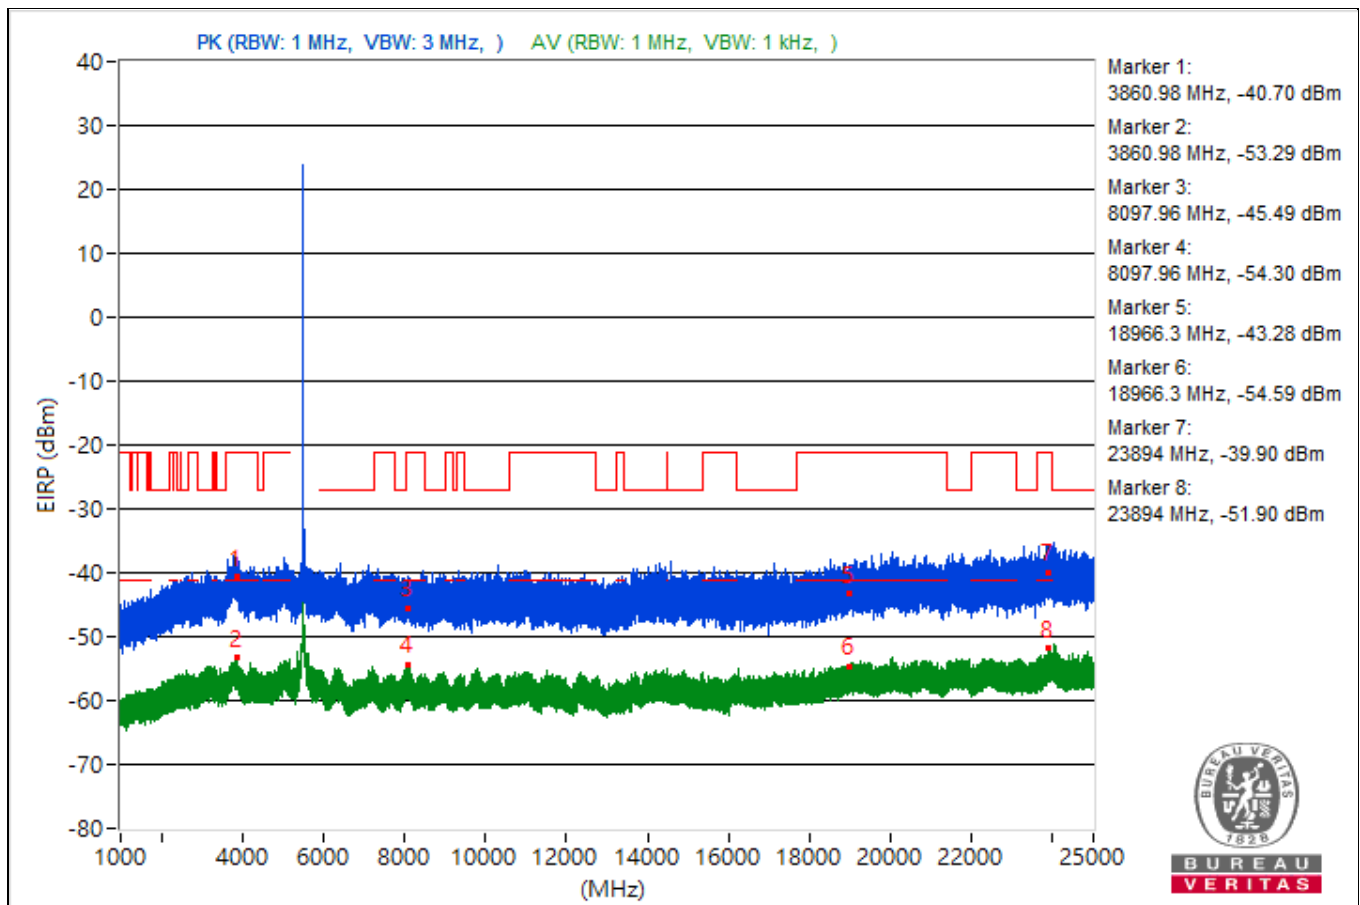


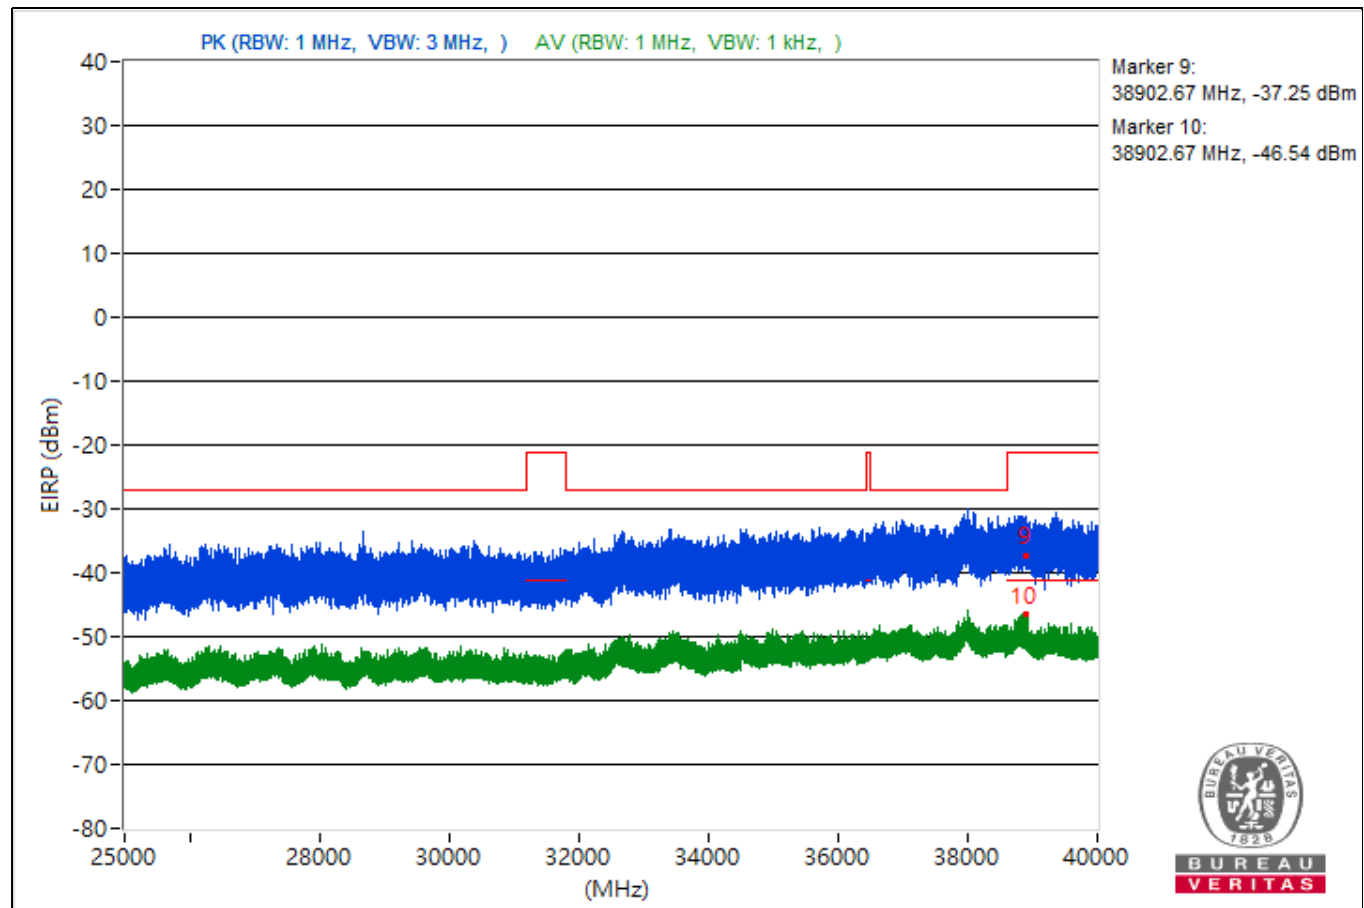


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3859.19	54.35 PK	74	-19.65	-45.83	4.92	-40.91
2	3859.19	42.32 AV	54	-11.68	-57.86	4.92	-52.94
3	7252.71	50.84 PK	74	-23.16	-49.34	4.92	-44.42
4	7252.71	40.45 AV	54	-13.55	-59.73	4.92	-54.81
5	18935.7	53.38 PK	74	-20.62	-46.8	4.92	-41.88
6	18935.7	40.73 AV	54	-13.27	-59.45	4.92	-54.53
7	23952.8	54.24 PK	74	-19.76	-45.94	4.92	-41.02
8	23952.8	43.05 AV	54	-10.95	-57.13	4.92	-52.21
9	38741.96	58.6 PK	74	-15.4	-41.58	4.92	-36.66
10	38741.96	48.56 AV	54	-5.44	-51.62	4.92	-46.7

Note: Margin value = Emission Level - Limit value

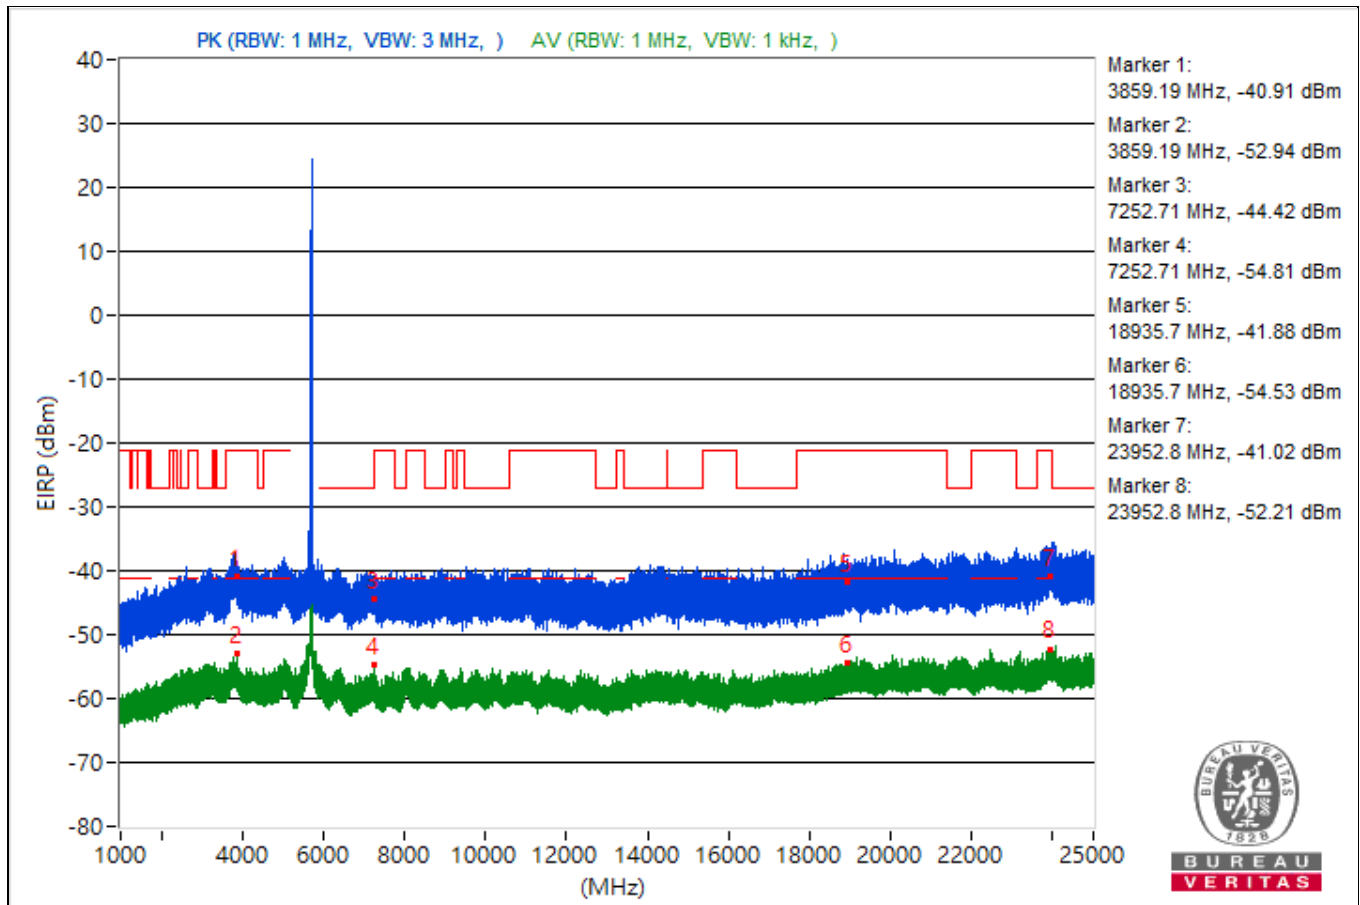


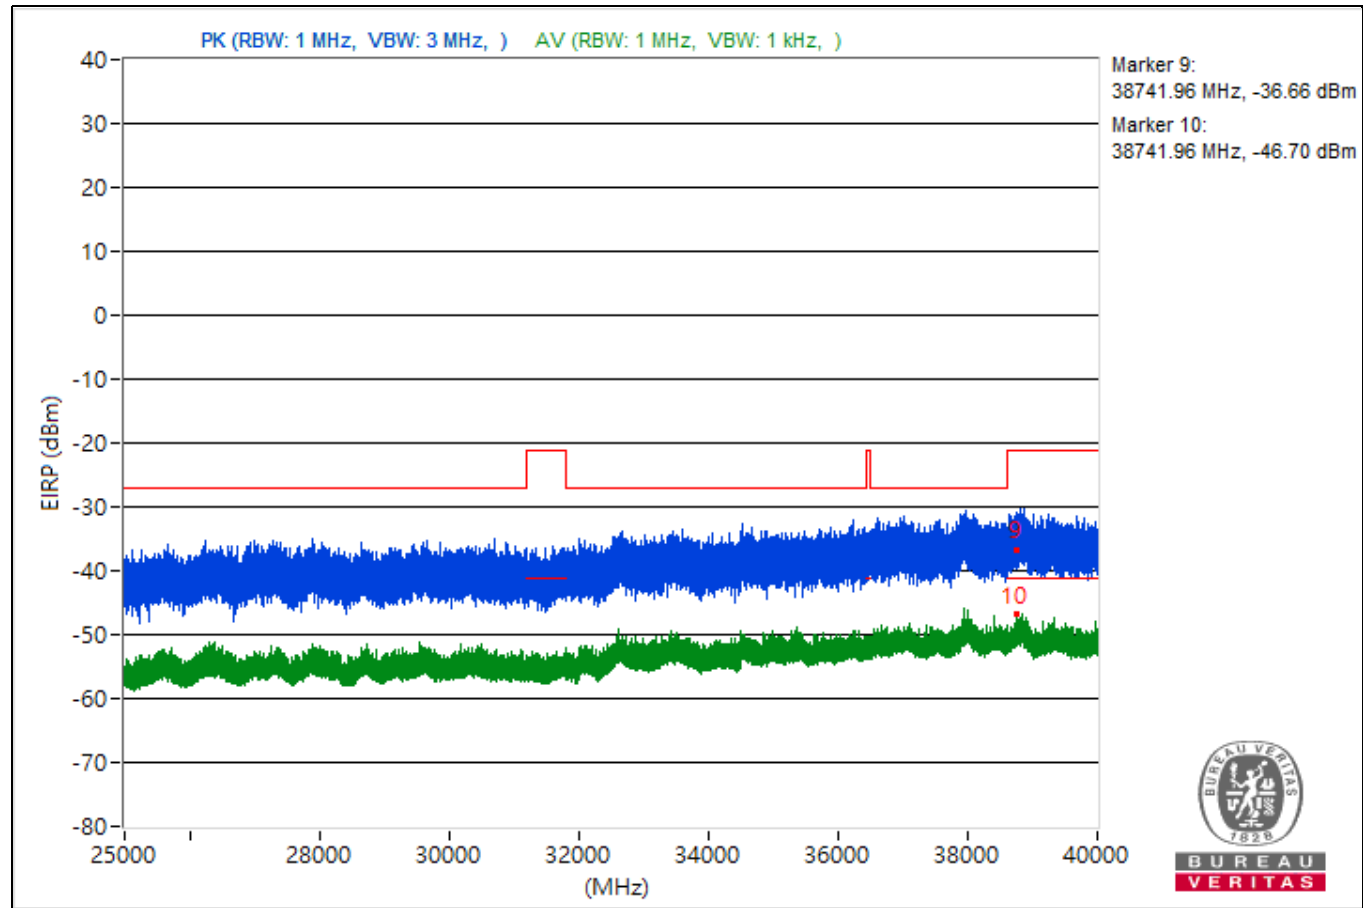


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3769.36	56.21 PK	74	-17.79	-43.97	4.92	-39.05
2	3769.36	41.55 AV	54	-12.45	-58.63	4.92	-53.71
3	8056.44	50.34 PK	74	-23.66	-49.84	4.92	-44.92
4	8056.44	40.28 AV	54	-13.72	-59.9	4.92	-54.98
5	18847.5	53.1 PK	74	-20.9	-47.08	4.92	-42.16
6	18847.5	40.61 AV	54	-13.39	-59.57	4.92	-54.65
7	23946.5	56.62 PK	74	-17.38	-43.56	4.92	-38.64
8	23946.5	43.45 AV	54	-10.55	-56.73	4.92	-51.81
9	38822.4	59.8 PK	74	-14.2	-40.38	4.92	-35.46
10	38822.4	48.37 AV	54	-5.63	-51.81	4.92	-46.89

Note: Margin value = Emission Level - Limit value

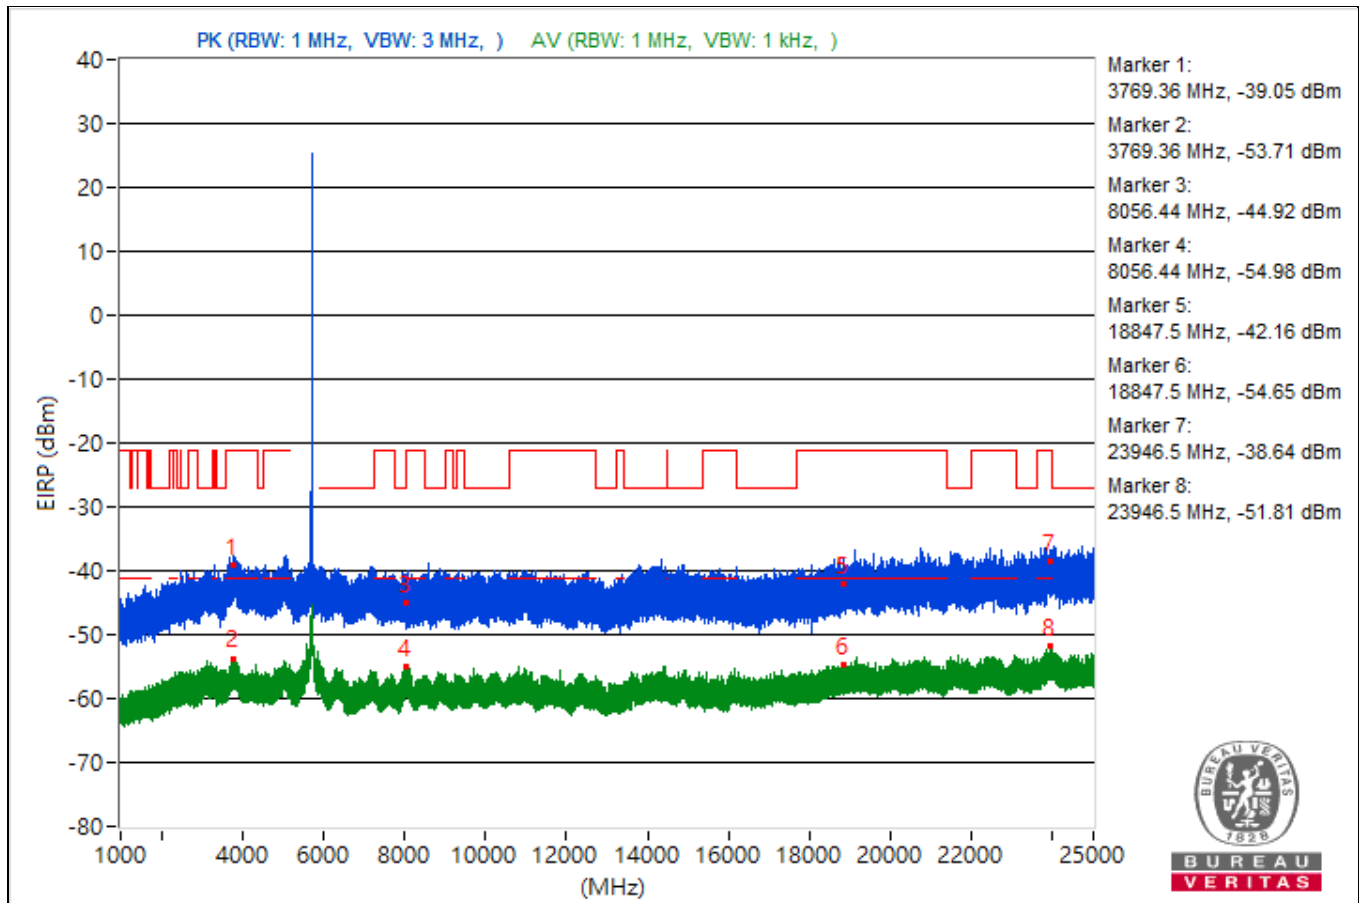


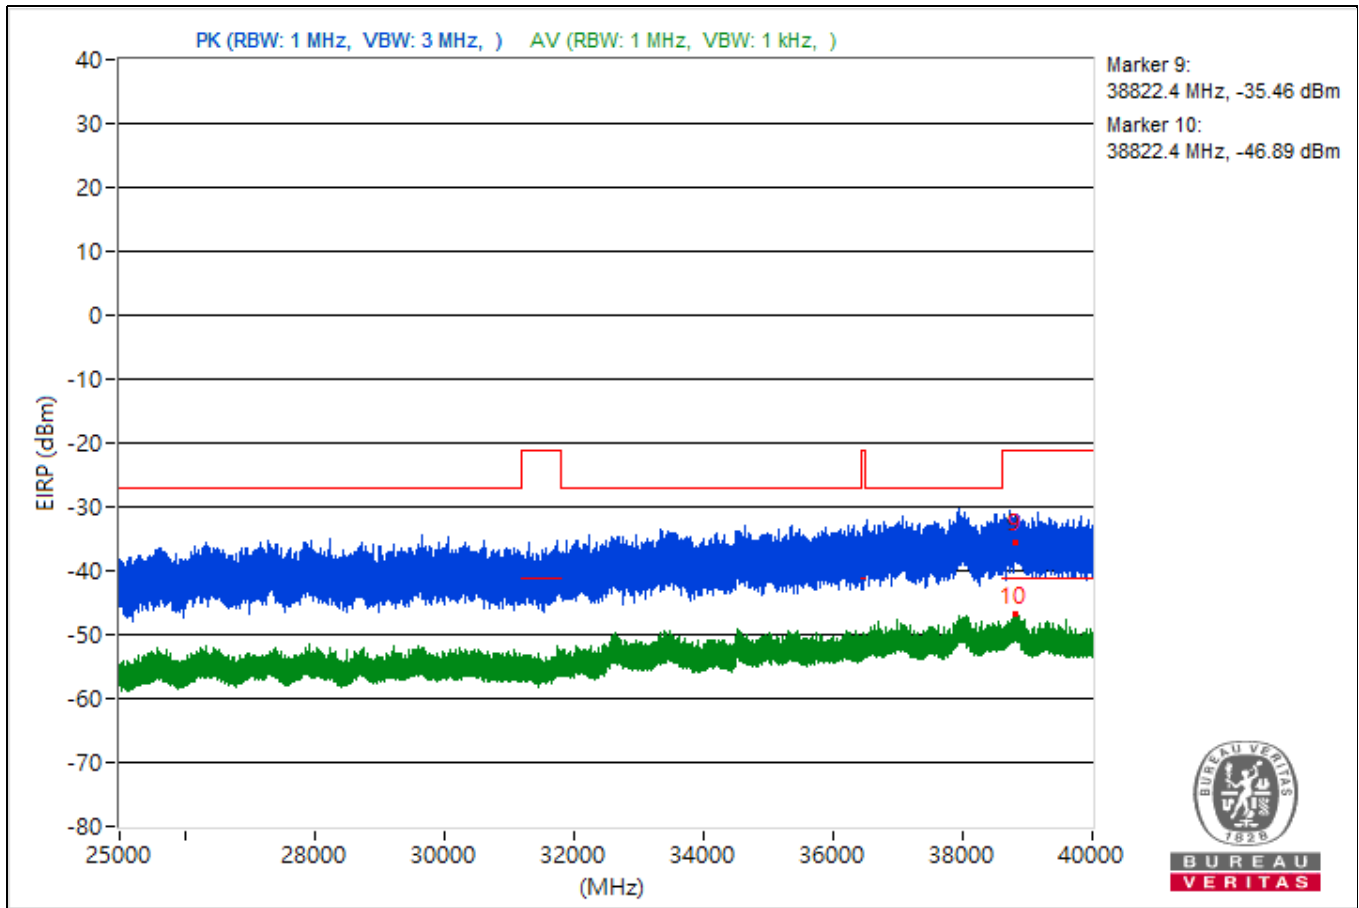


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3788.88	54.72 PK	74	-19.28	-45.46	4.92	-40.54
2	3788.88	42.24 AV	54	-11.76	-57.94	4.92	-53.02
3	11472.27	51.82 PK	74	-22.18	-48.36	4.92	-43.44
4	11472.27	42.01 AV	54	-11.99	-58.17	4.92	-53.25
5	18909.8	53.81 PK	74	-20.19	-46.37	4.92	-41.45
6	18909.8	40.96 AV	54	-13.04	-59.22	4.92	-54.3
7	23807.2	53.86 PK	74	-20.14	-46.32	4.92	-41.4
8	23807.2	42.75 AV	54	-11.25	-57.43	4.92	-52.51
9	38837.42	58.78 PK	74	-15.22	-41.4	4.92	-36.48
10	38837.42	48.57 AV	54	-5.43	-51.61	4.92	-46.69

Note: Margin value = Emission Level - Limit value

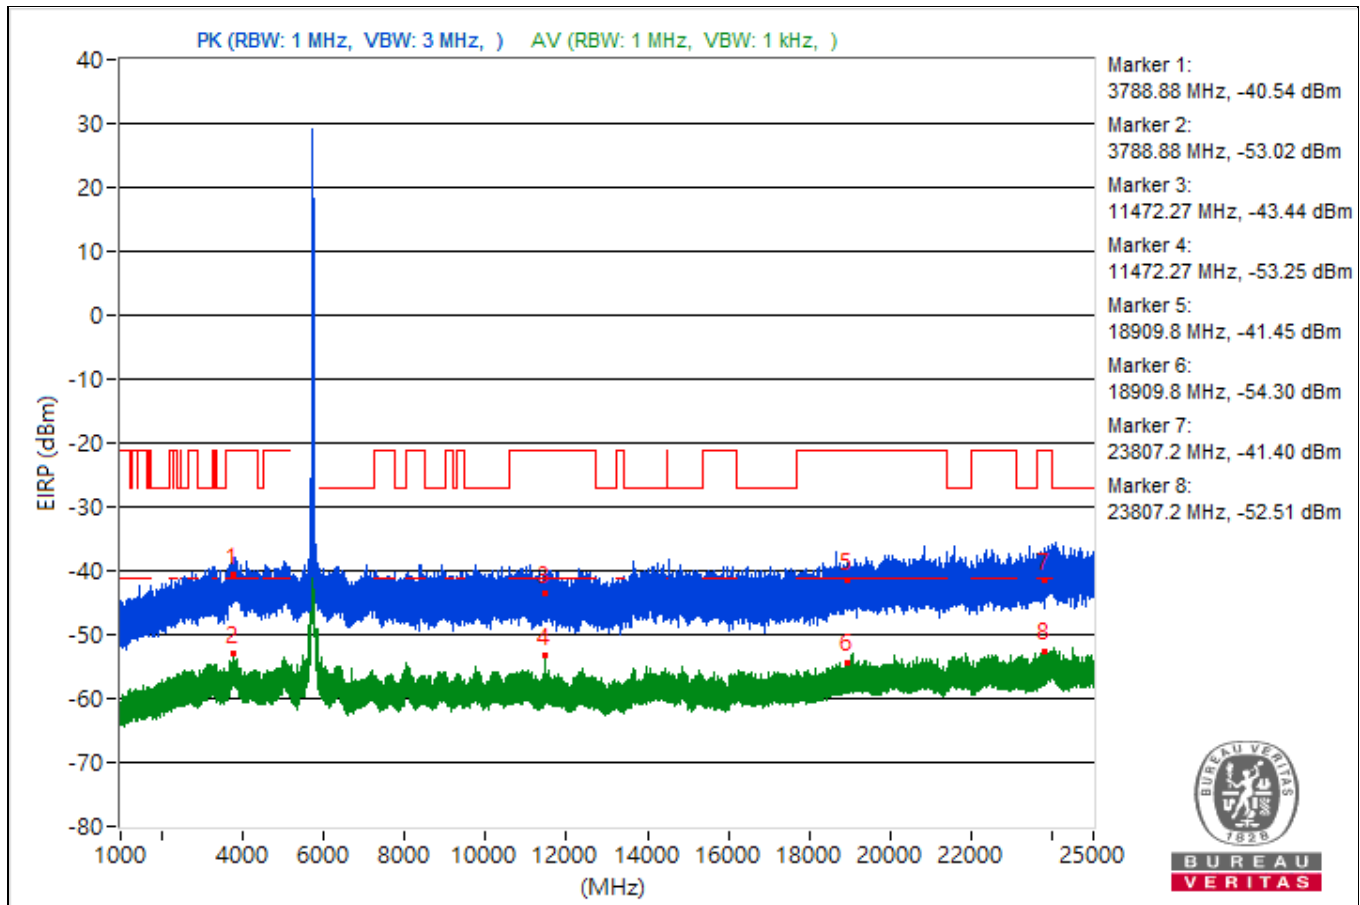


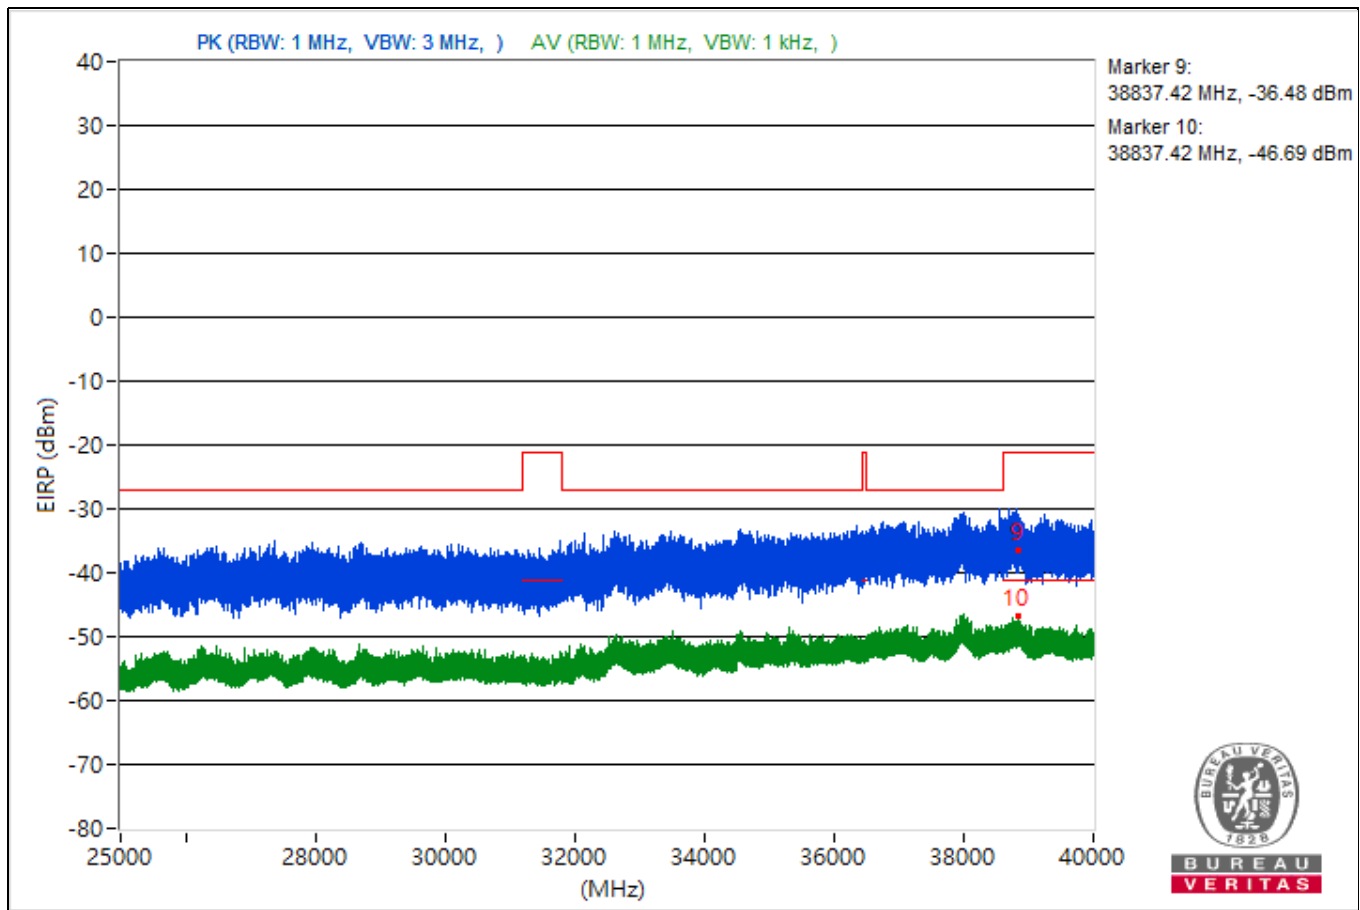


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3863.31	53.74 PK	74	-20.26	-46.44	4.92	-41.52
2	3863.31	41.37 AV	54	-12.63	-58.81	4.92	-53.89
3	11667.2	51.24 PK	74	-22.76	-48.94	4.92	-44.02
4	11667.2	40.56 AV	54	-13.44	-59.62	4.92	-54.7
5	18625.3	51.92 PK	74	-22.08	-48.26	4.92	-43.34
6	18625.3	41.12 AV	54	-12.88	-59.06	4.92	-54.14
7	23972.7	55.69 PK	74	-18.31	-44.49	4.92	-39.57
8	23972.7	43.52 AV	54	-10.48	-56.66	4.92	-51.74
9	38763.11	59.94 PK	74	-14.06	-40.24	4.92	-35.32
10	38763.11	49.24 AV	54	-4.76	-50.94	4.92	-46.02

Note: Margin value = Emission Level - Limit value

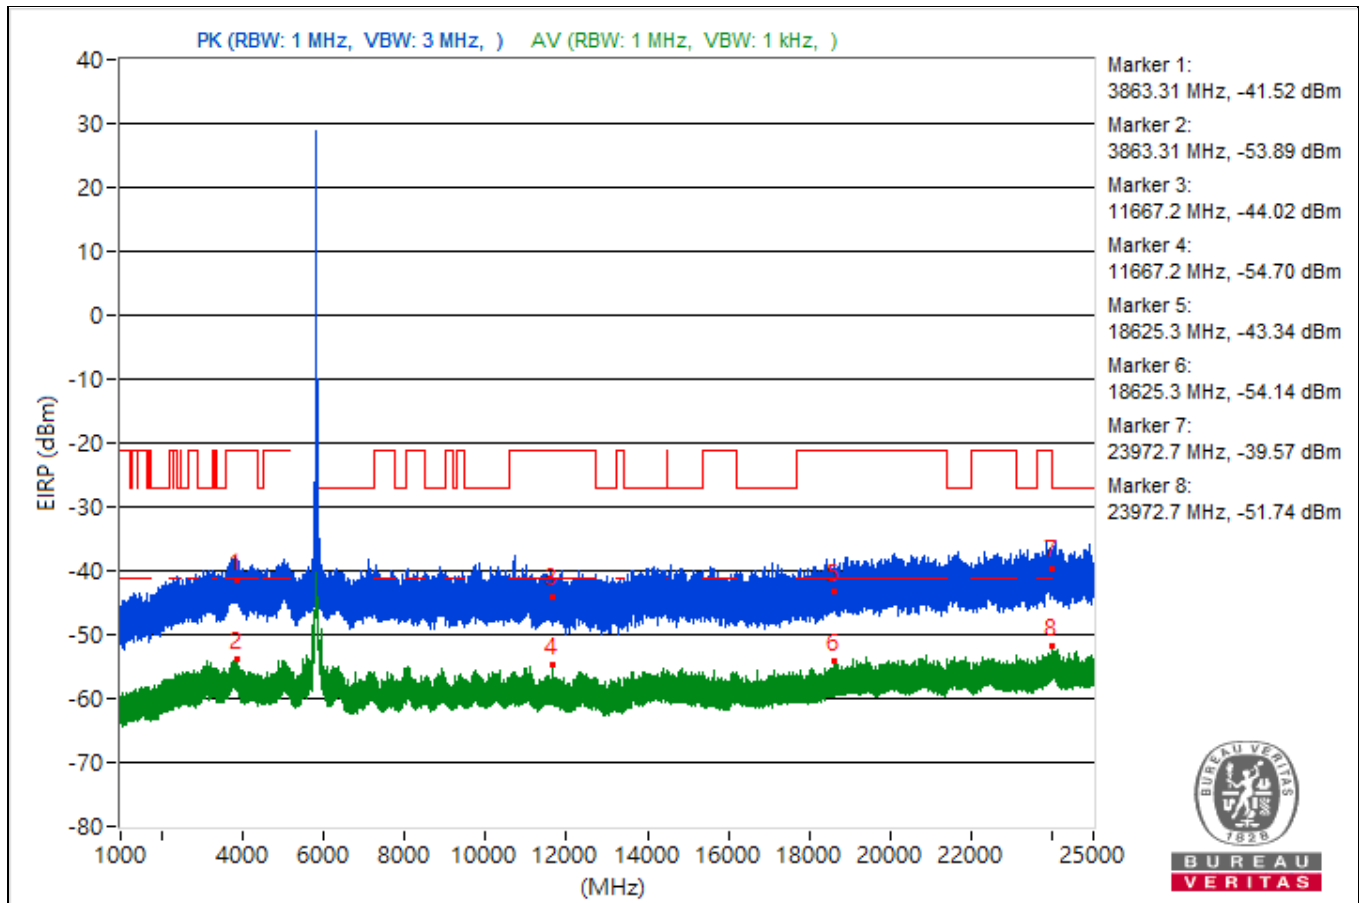


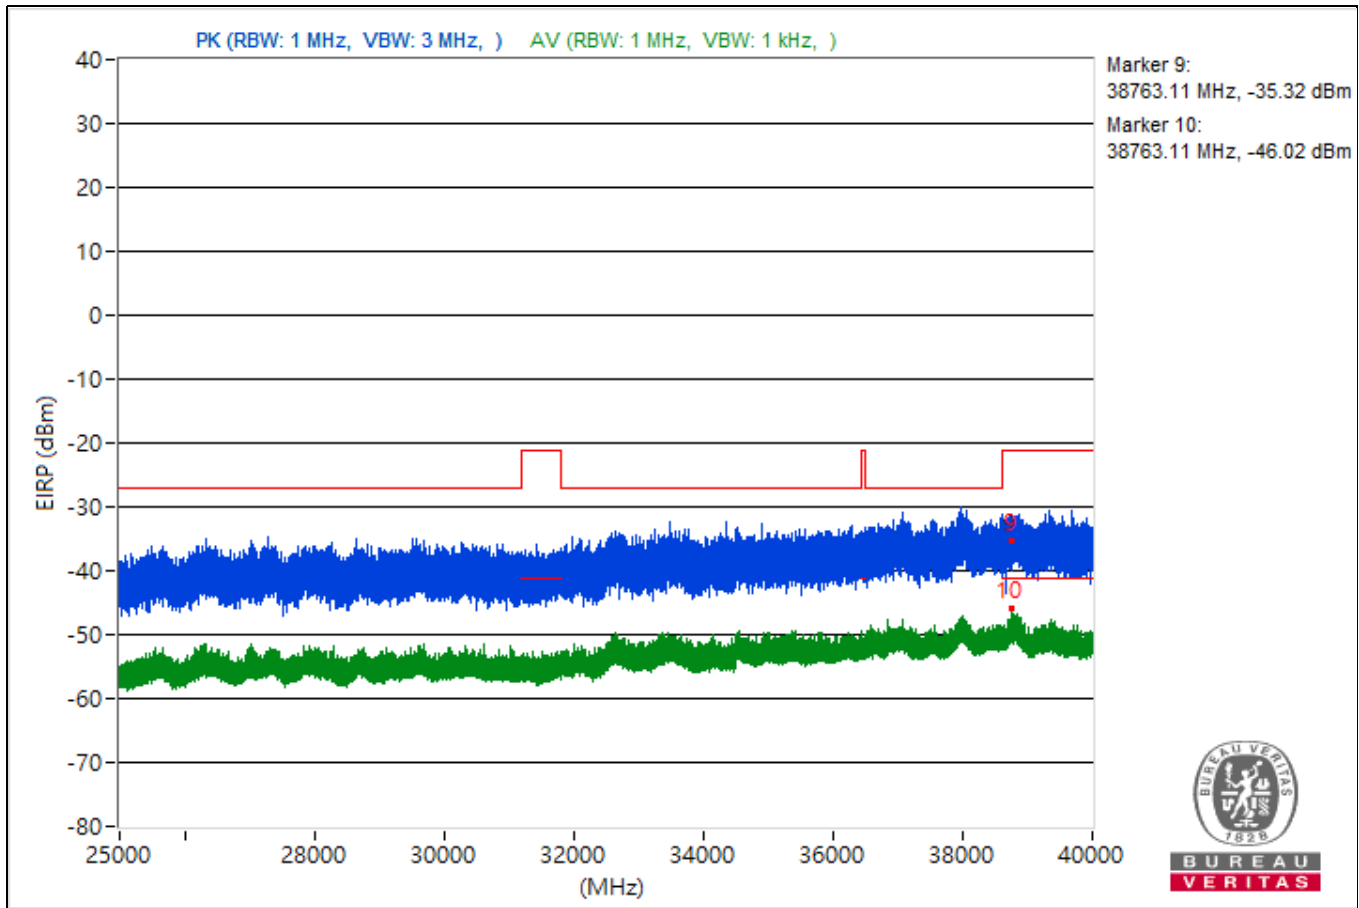


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5093.44	53.22 PK	74	-20.78	-46.96	4.92	-42.04
2	5093.44	43.62 AV	54	-10.38	-56.56	4.92	-51.64
3	8075.2	51.05 PK	74	-22.95	-49.13	4.92	-44.21
4	8075.2	40.2 AV	54	-13.8	-59.98	4.92	-55.06
5	18999.7	51.7 PK	74	-22.3	-48.48	4.92	-43.56
6	18999.7	40.8 AV	54	-13.2	-59.38	4.92	-54.46
7	23991.6	54.73 PK	74	-19.27	-45.45	4.92	-40.53
8	23991.6	42.98 AV	54	-11.02	-57.2	4.92	-52.28
9	38864.62	60.83 PK	74	-13.17	-39.35	4.92	-34.43
10	38864.62	48.25 AV	54	-5.75	-51.93	4.92	-47.01

Note: Margin value = Emission Level - Limit value

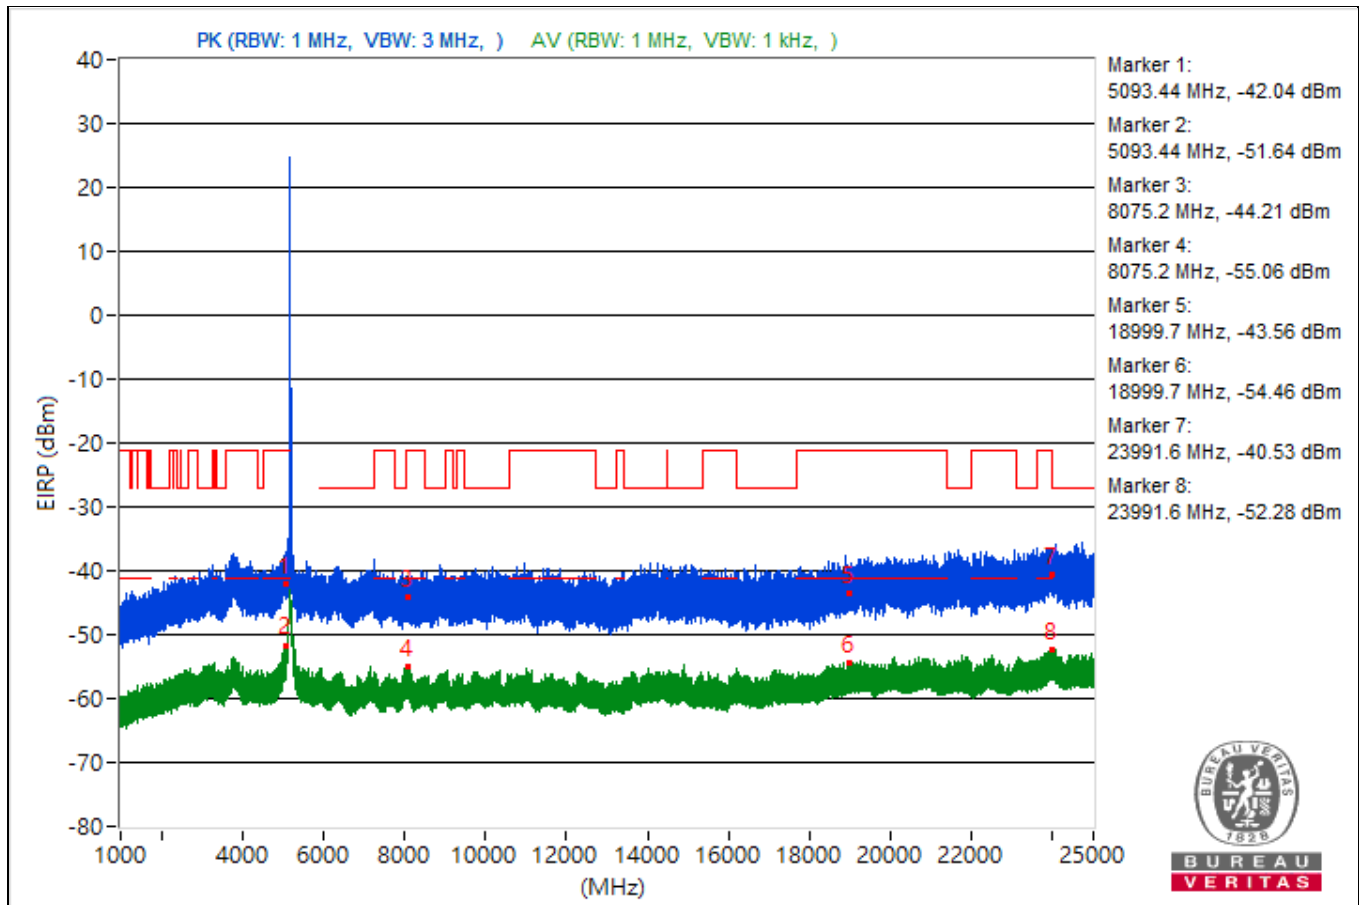


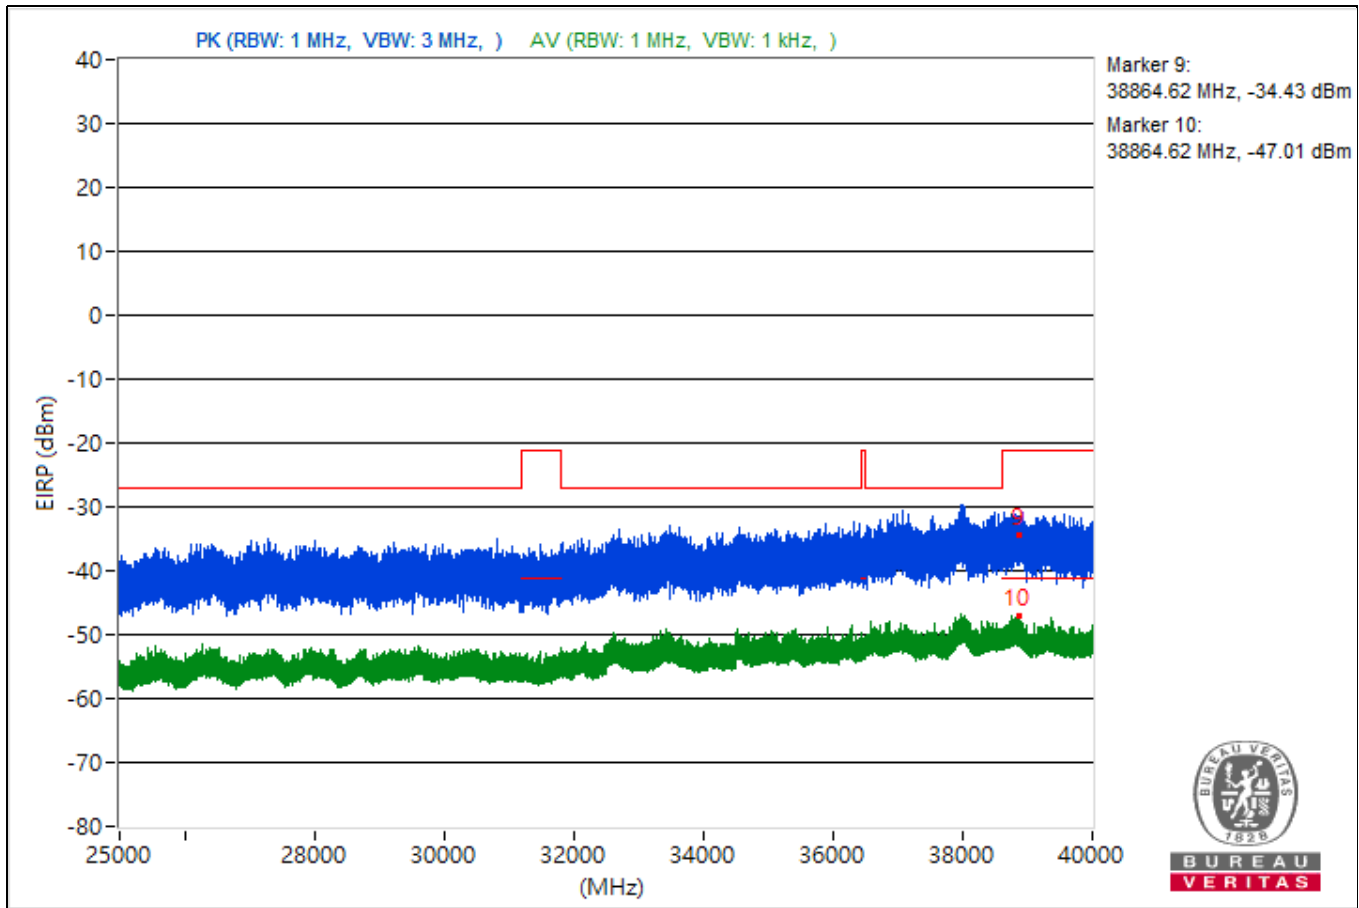


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5075.4	54.54 PK	74	-19.46	-45.64	4.92	-40.72
2	5075.4	42.76 AV	54	-11.24	-57.42	4.92	-52.5
3	8054.76	50.61 PK	74	-23.39	-49.57	4.92	-44.65
4	8054.76	40.35 AV	54	-13.65	-59.83	4.92	-54.91
5	18894.8	52.62 PK	74	-21.38	-47.56	4.92	-42.64
6	18894.8	40.87 AV	54	-13.13	-59.31	4.92	-54.39
7	23909.2	55.38 PK	74	-18.62	-44.8	4.92	-39.88
8	23909.2	43.26 AV	54	-10.74	-56.92	4.92	-52
9	38767.2	59.06 PK	74	-14.94	-41.12	4.92	-36.2
10	38767.2	49.04 AV	54	-4.96	-51.14	4.92	-46.22

Note: Margin value = Emission Level - Limit value

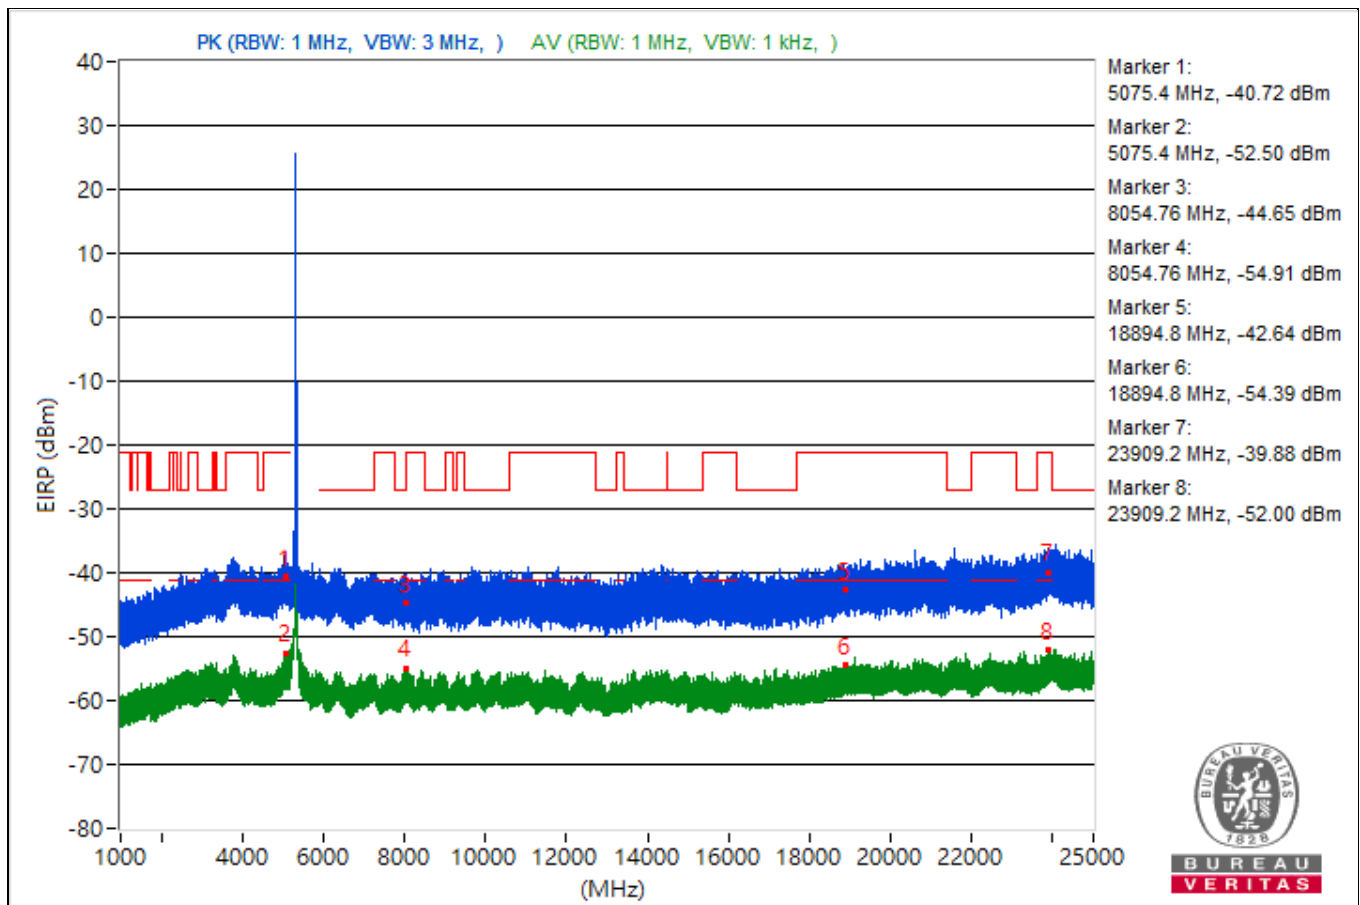


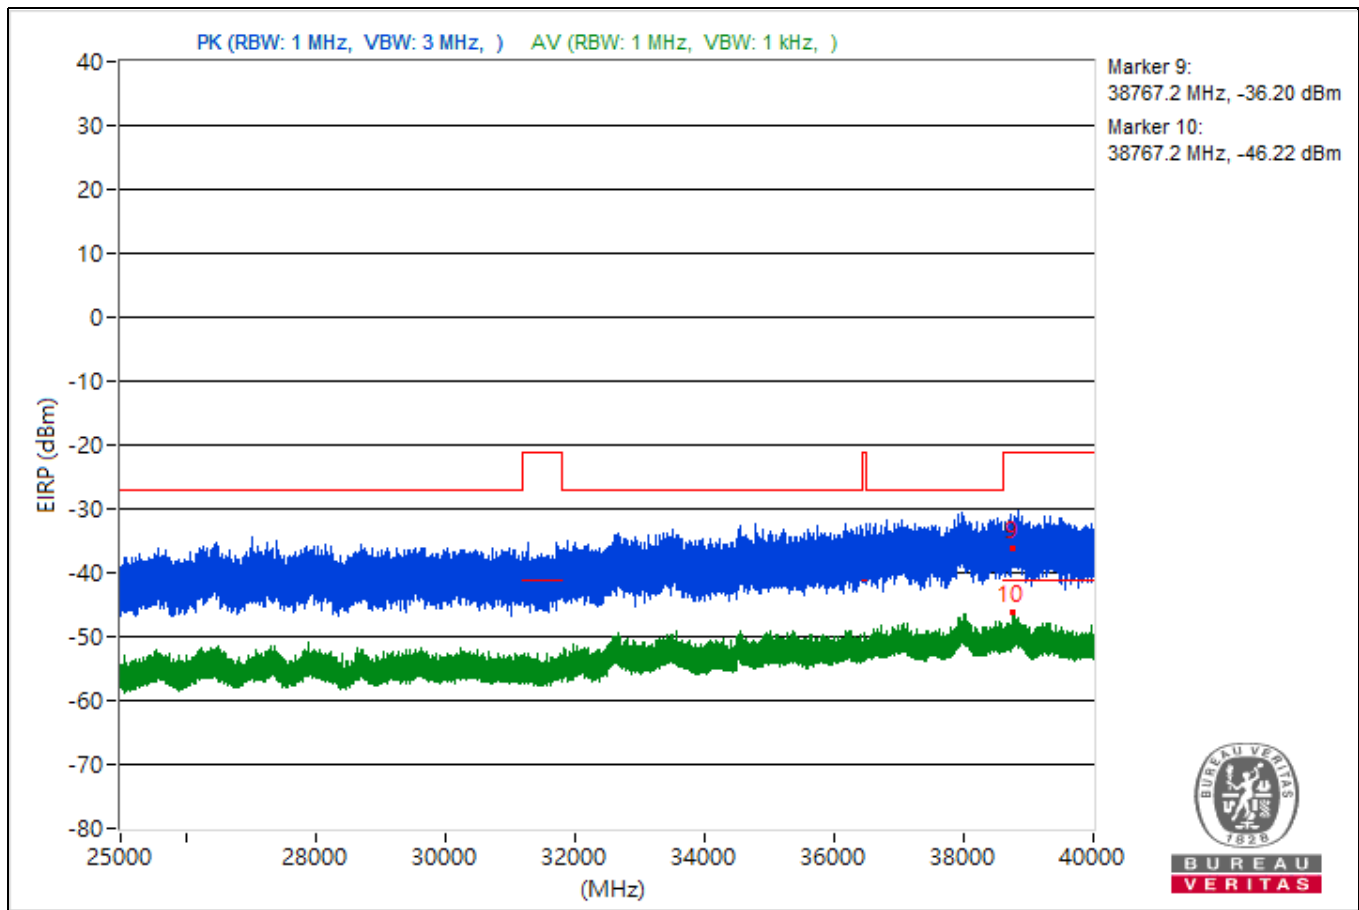


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.83	54.01 PK	74	-19.99	-46.17	4.92	-41.25
2	3763.83	41.92 AV	54	-12.08	-58.26	4.92	-53.34
3	8056.09	51.98 PK	74	-22.02	-48.2	4.92	-43.28
4	8056.09	40.4 AV	54	-13.6	-59.78	4.92	-54.86
5	18718.5	53.39 PK	74	-20.61	-46.79	4.92	-41.87
6	18718.5	41.14 AV	54	-12.86	-59.04	4.92	-54.12
7	23996.2	55.89 PK	74	-18.11	-44.29	4.92	-39.37
8	23996.2	43.81 AV	54	-10.19	-56.37	4.92	-51.45
9	38842.84	60.63 PK	74	-13.37	-39.55	4.92	-34.63
10	38842.84	48.58 AV	54	-5.42	-51.6	4.92	-46.68

Note: Margin value = Emission Level - Limit value

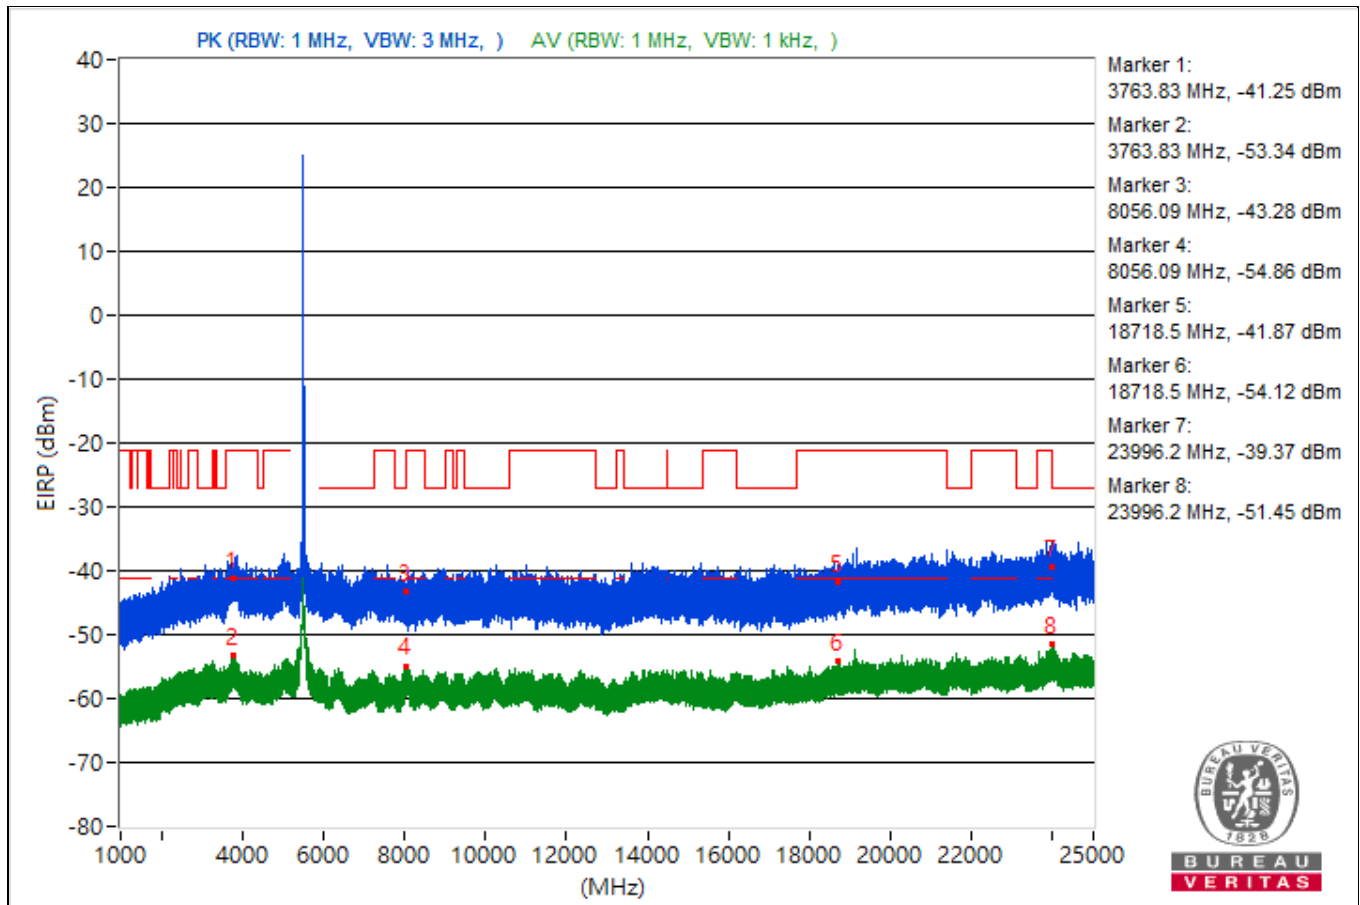


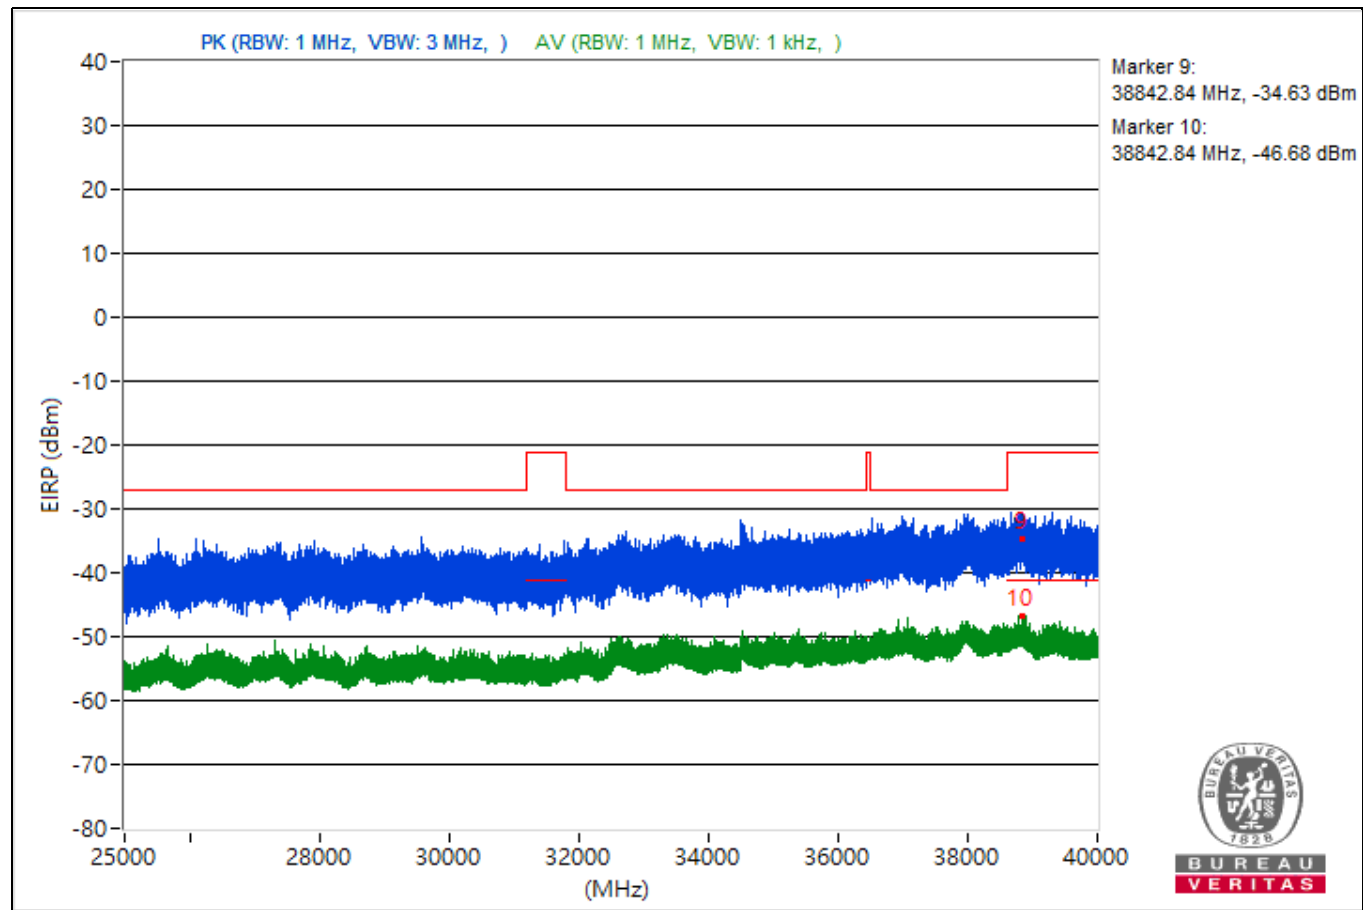


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3758.39	52.7 PK	74	-21.3	-47.48	4.92	-42.56
2	3758.39	41.99 AV	54	-12.01	-58.19	4.92	-53.27
3	11066.93	51.92 PK	74	-22.08	-48.26	4.92	-43.34
4	11066.93	40.24 AV	54	-13.76	-59.94	4.92	-55.02
5	18877.4	50.96 PK	74	-23.04	-49.22	4.92	-44.3
6	18877.4	41.23 AV	54	-12.77	-58.95	4.92	-54.03
7	23966.1	55.93 PK	74	-18.07	-44.25	4.92	-39.33
8	23966.1	43.85 AV	54	-10.15	-56.33	4.92	-51.41
9	38853.87	60.09 PK	74	-13.91	-40.09	4.92	-35.17
10	38853.87	48.36 AV	54	-5.64	-51.82	4.92	-46.9

Note: Margin value = Emission Level - Limit value

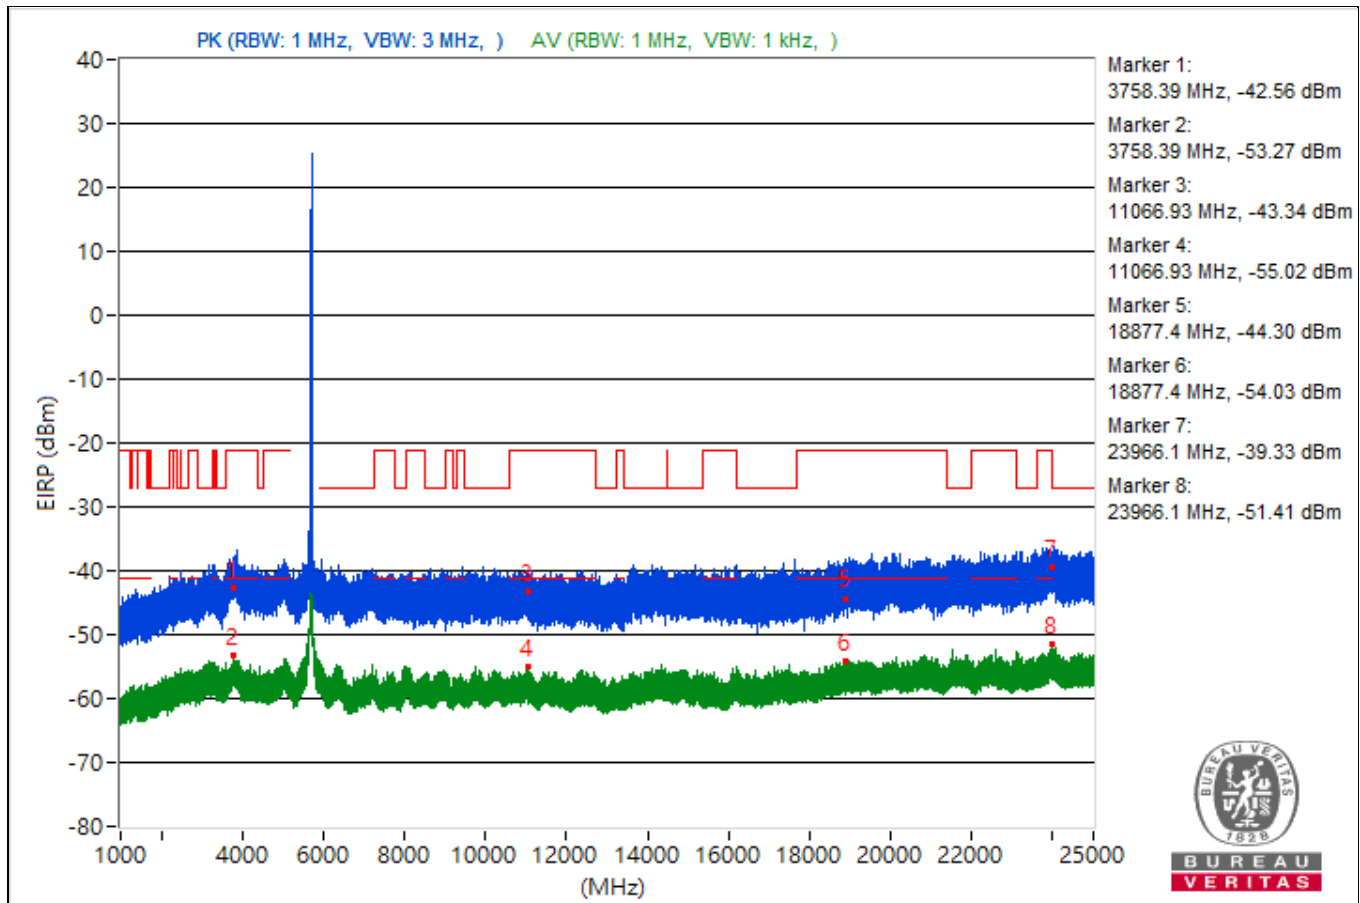


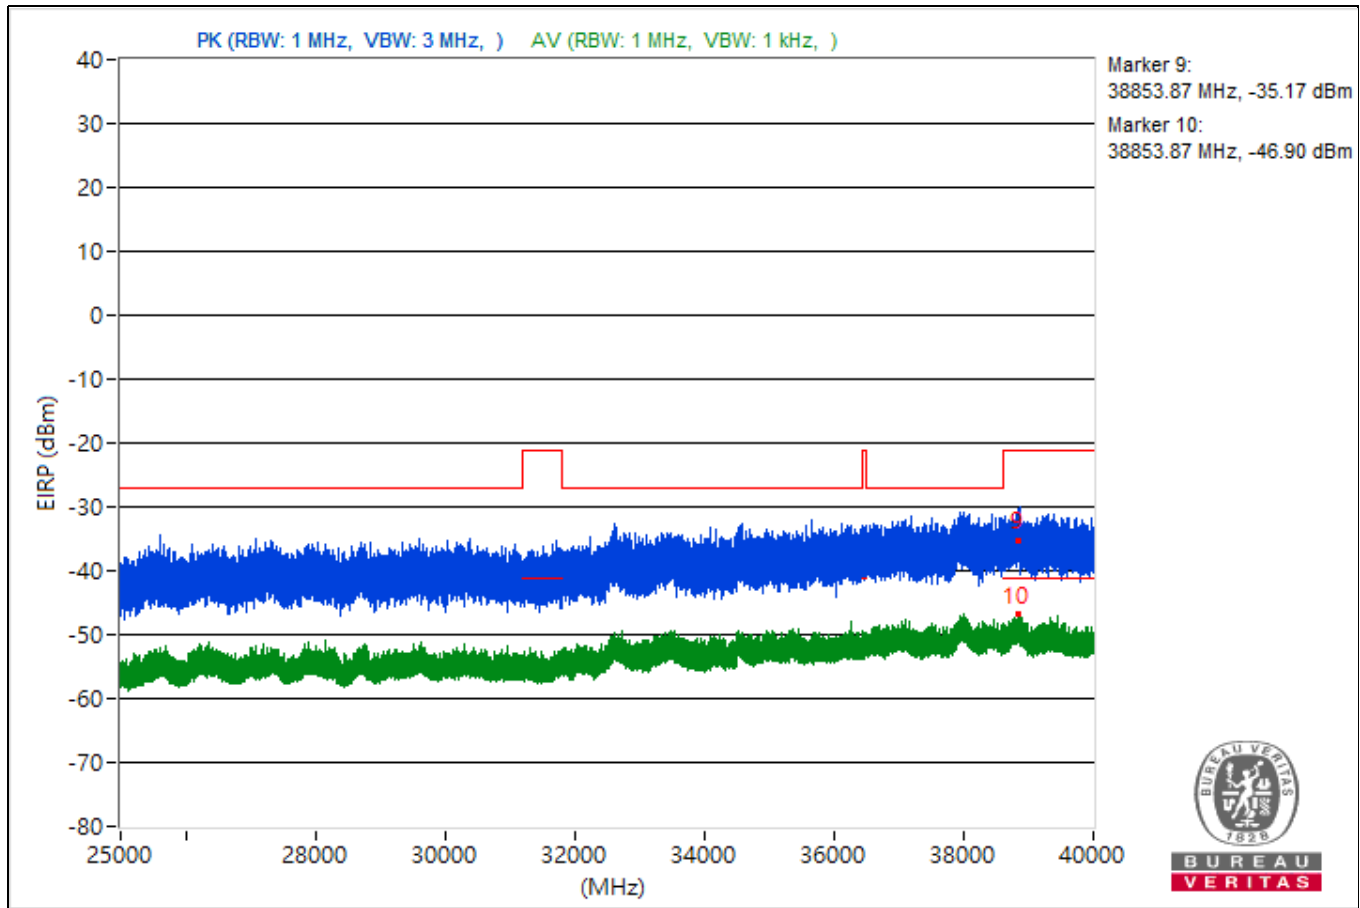


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.98	53.16 PK	74	-20.84	-47.02	4.92	-42.1
2	3797.98	42.48 AV	54	-11.52	-57.7	4.92	-52.78
3	8044.98	50.99 PK	74	-23.01	-49.19	4.92	-44.27
4	8044.98	40.34 AV	54	-13.66	-59.84	4.92	-54.92
5	18672.5	51.85 PK	74	-22.15	-48.33	4.92	-43.41
6	18672.5	41.79 AV	54	-12.21	-58.39	4.92	-53.47
7	23914.7	55.2 PK	74	-18.8	-44.98	4.92	-40.06
8	23914.7	43.55 AV	54	-10.45	-56.63	4.92	-51.71
9	38865.16	60.24 PK	74	-13.76	-39.94	4.92	-35.02
10	38865.16	49.36 AV	54	-4.64	-50.82	4.92	-45.9

Note: Margin value = Emission Level - Limit value

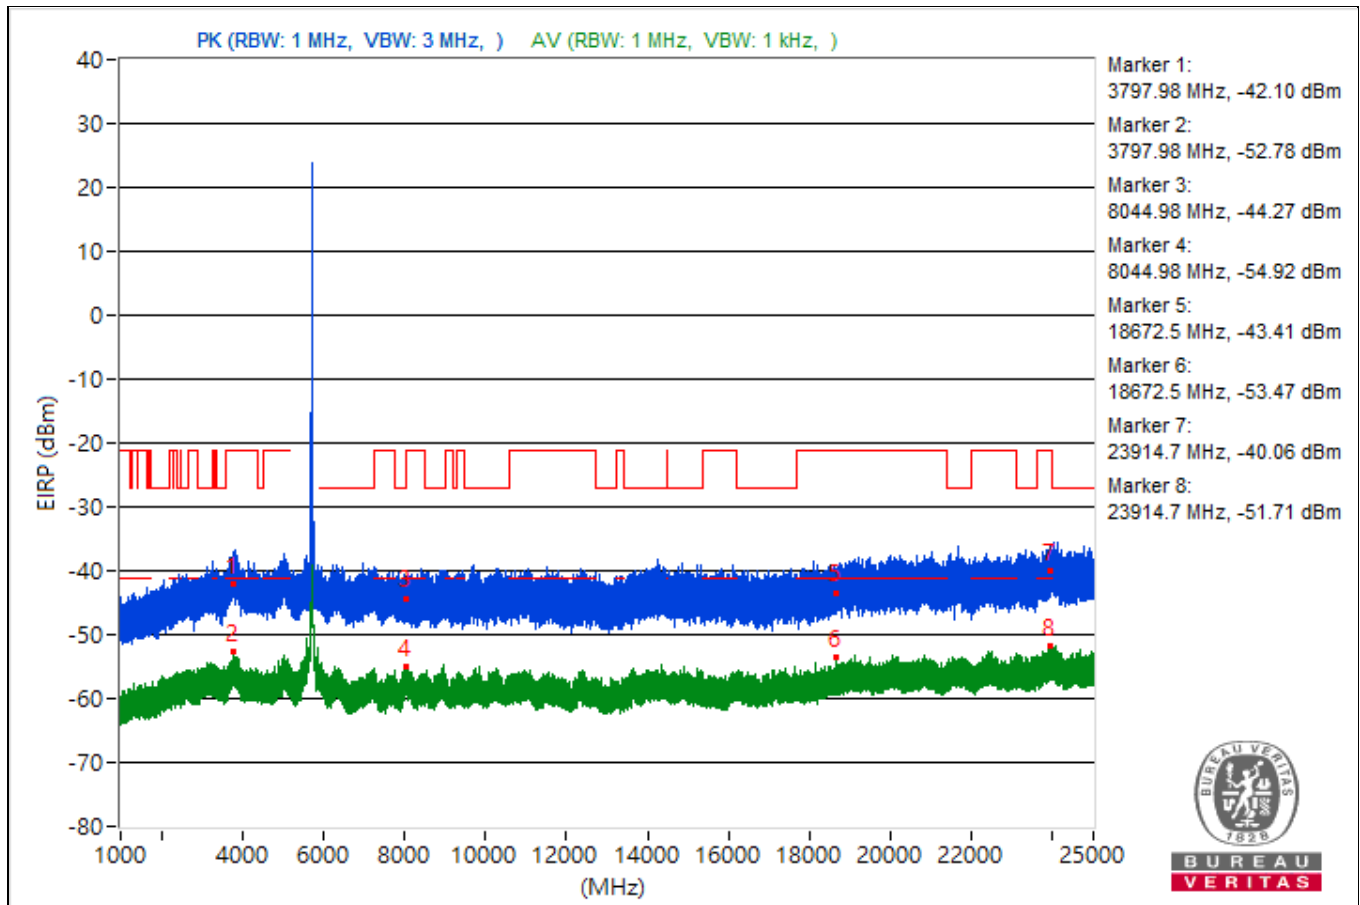


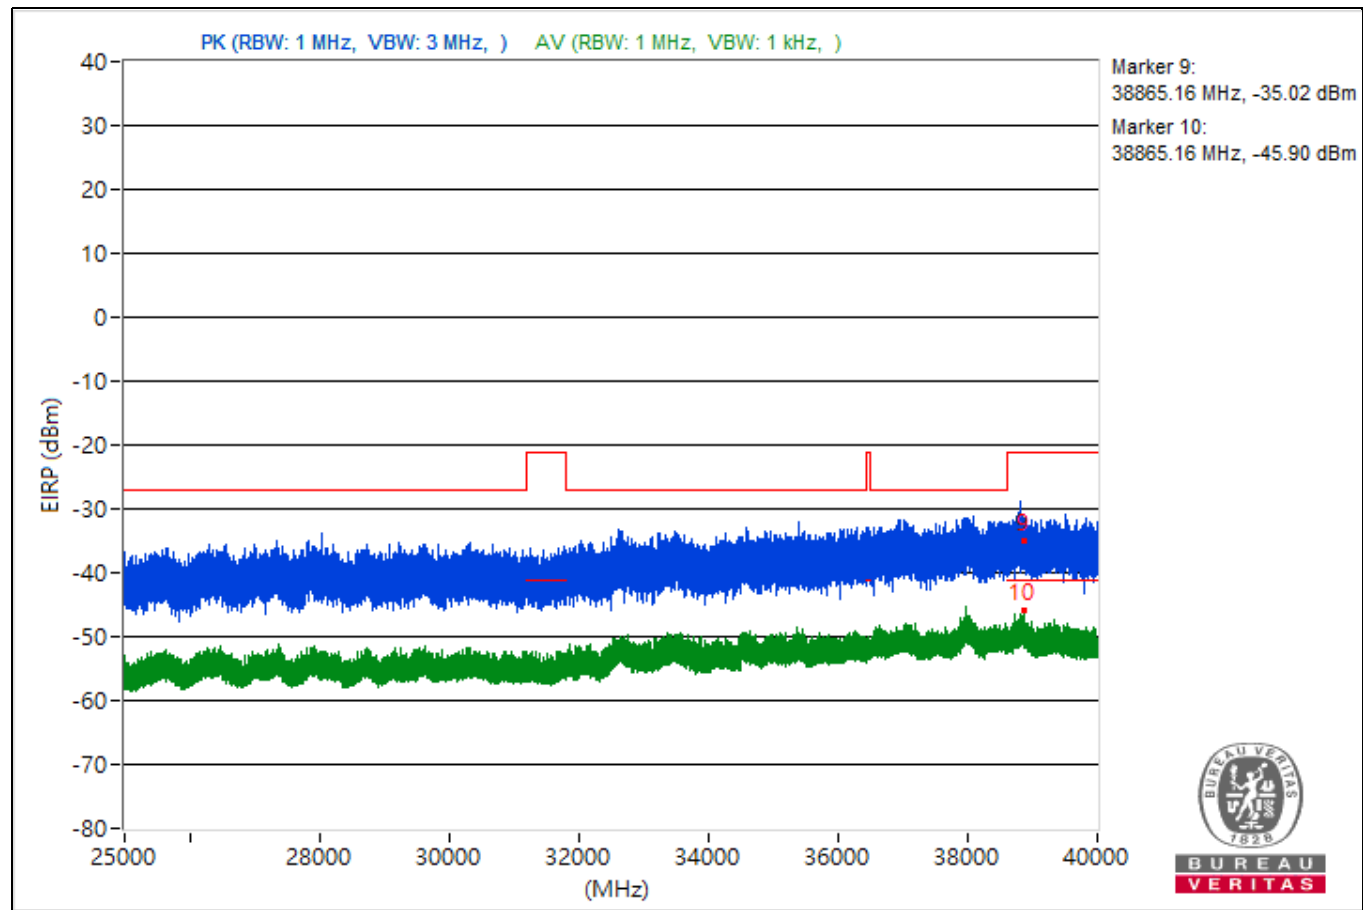


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5043.82	53.42 PK	74	-20.58	-46.76	4.92	-41.84
2	5043.82	41.96 AV	54	-12.04	-58.22	4.92	-53.3
3	11474.58	51.78 PK	74	-22.22	-48.4	4.92	-43.48
4	11474.58	41.12 AV	54	-12.88	-59.06	4.92	-54.14
5	18946.2	53.48 PK	74	-20.52	-46.7	4.92	-41.78
6	18946.2	40.84 AV	54	-13.16	-59.34	4.92	-54.42
7	23955.7	56.71 PK	74	-17.29	-43.47	4.92	-38.55
8	23955.7	43.71 AV	54	-10.29	-56.47	4.92	-51.55
9	38804.62	63.51 PK	74	-10.49	-36.67	4.92	-31.75
10	38804.62	48.78 AV	54	-5.22	-51.4	4.92	-46.48

Note: Margin value = Emission Level - Limit value

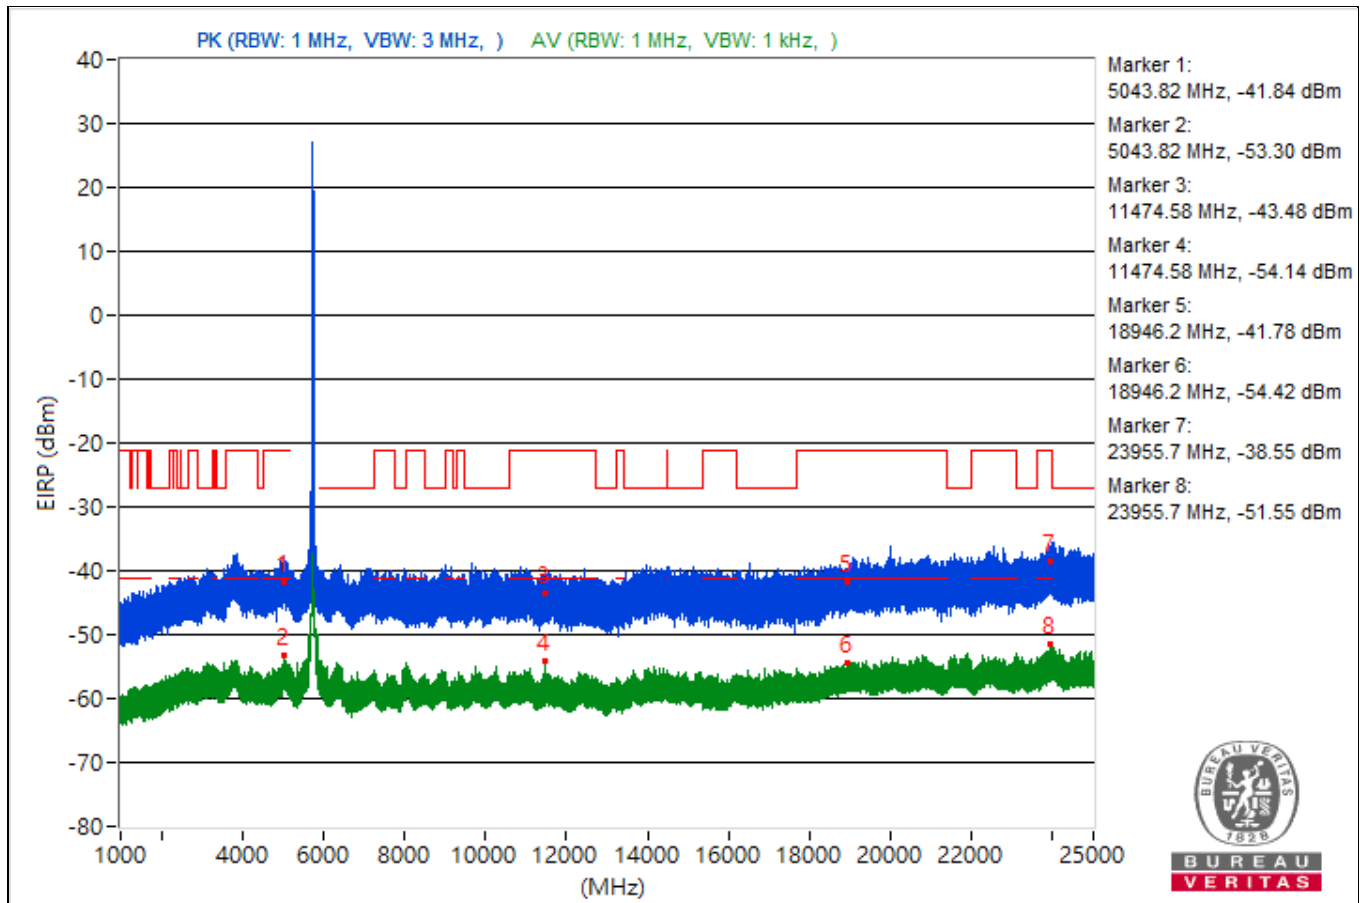


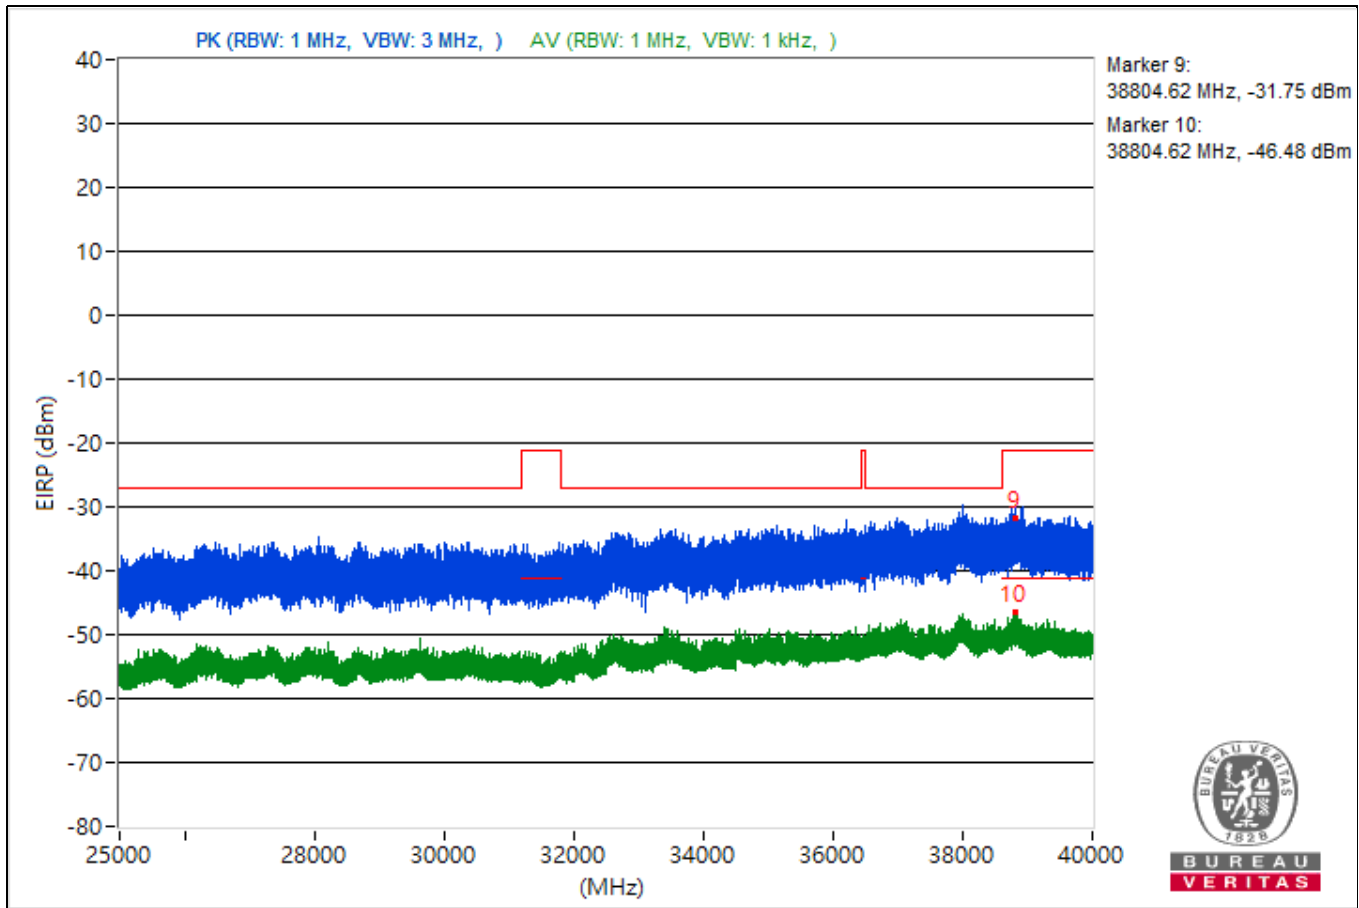


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3773.94	52.66 PK	74	-21.34	-47.52	4.92	-42.6
2	3773.94	42.02 AV	54	-11.98	-58.16	4.92	-53.24
3	8070.58	50.83 PK	74	-23.17	-49.35	4.92	-44.43
4	8070.58	40.75 AV	54	-13.25	-59.43	4.92	-54.51
5	18942.3	52.34 PK	74	-21.66	-47.84	4.92	-42.92
6	18942.3	41.58 AV	54	-12.42	-58.6	4.92	-53.68
7	23996.6	53.19 PK	74	-20.81	-46.99	4.92	-42.07
8	23996.6	43.38 AV	54	-10.62	-56.8	4.92	-51.88
9	38787.11	63.37 PK	74	-10.63	-36.81	4.92	-31.89
10	38787.11	48.39 AV	54	-5.61	-51.79	4.92	-46.87

Note: Margin value = Emission Level - Limit value

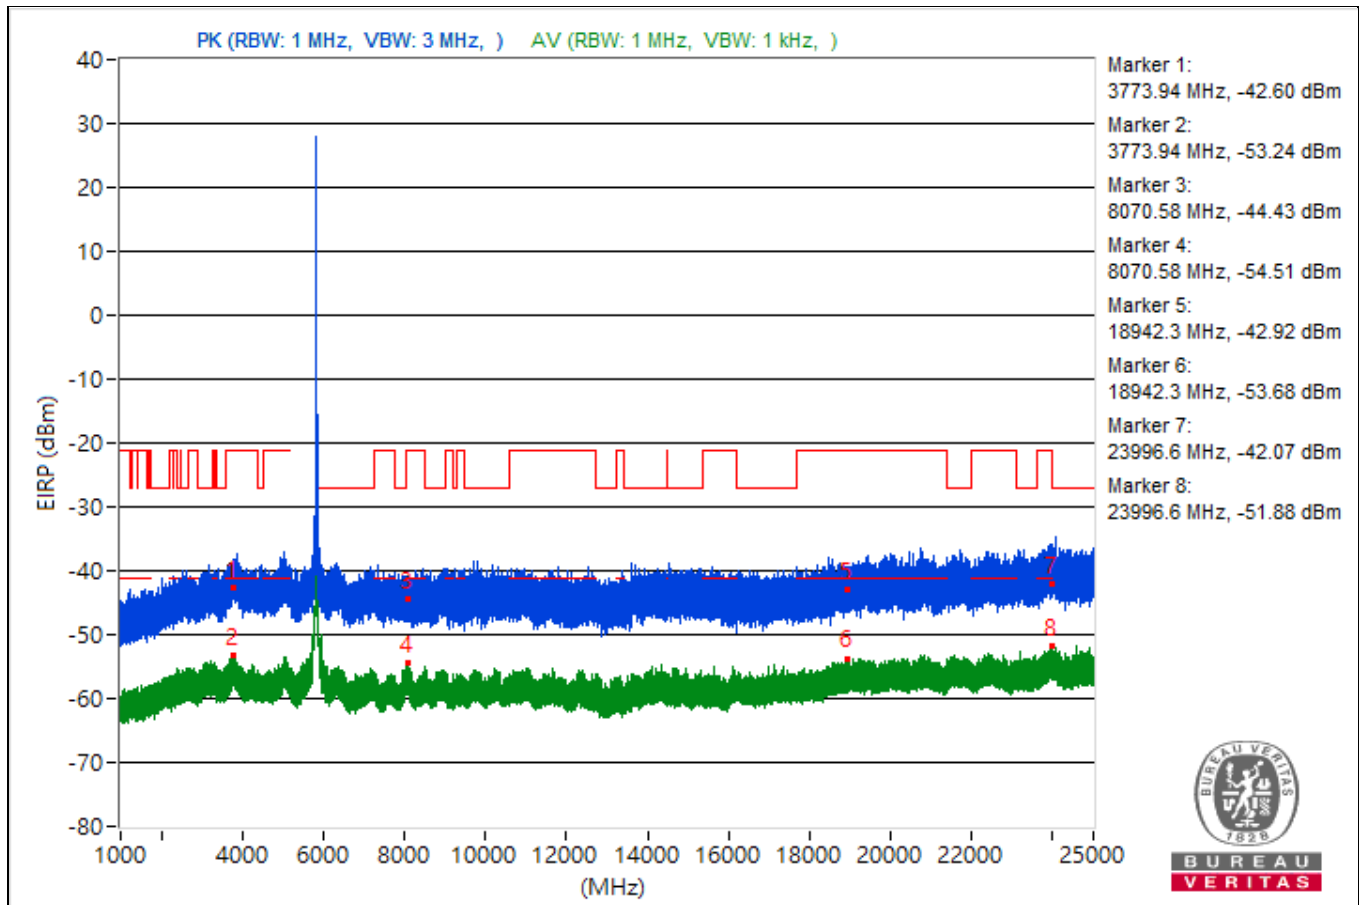


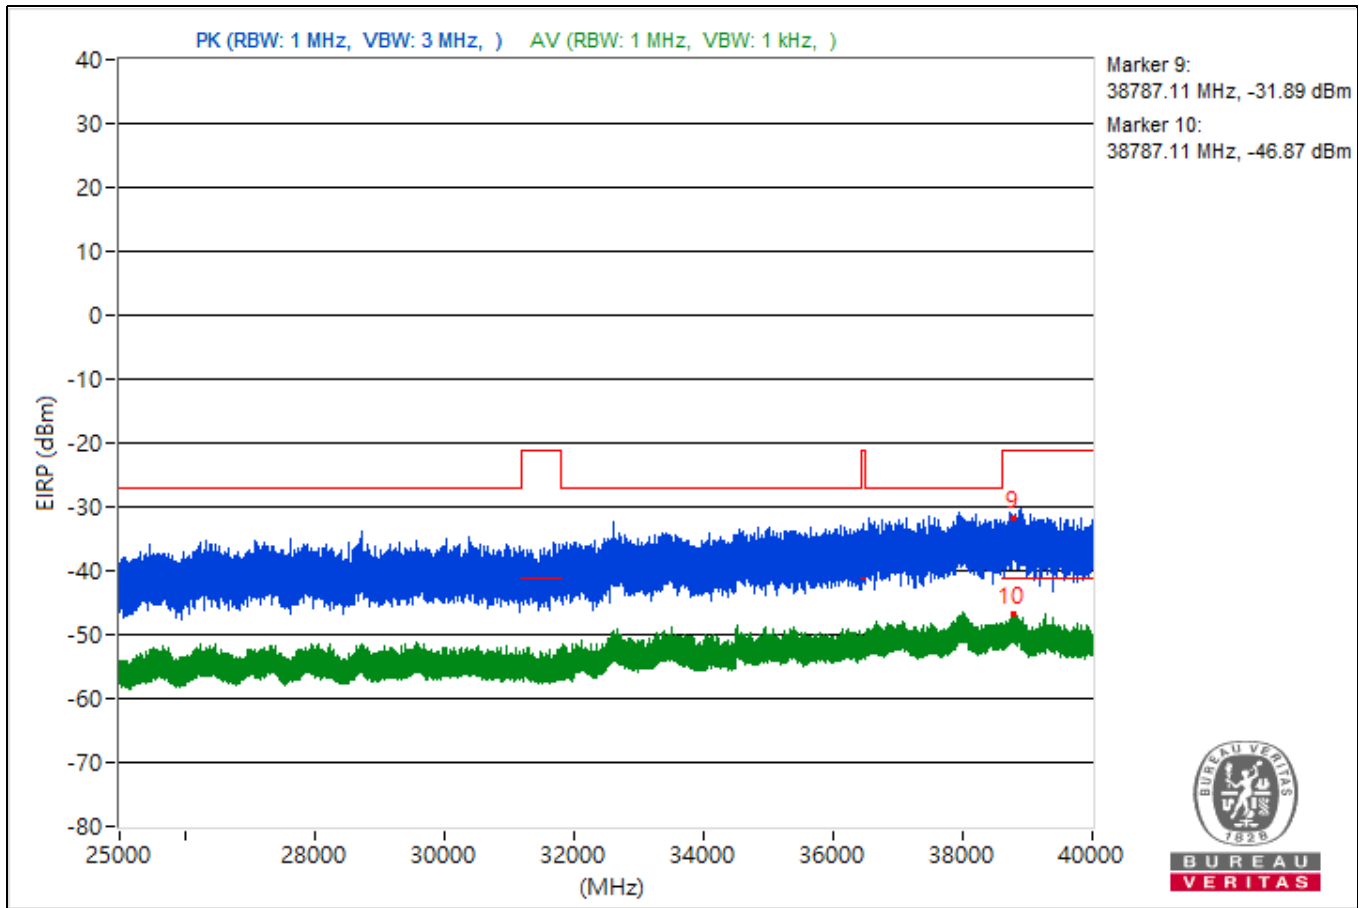


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.04	52.83 PK	74	-21.17	-47.35	4.92	-42.43
2	5099.04	44.35 AV	54	-9.65	-55.83	4.92	-50.91
3	8078.67	52.32 PK	74	-21.68	-47.86	4.92	-42.94
4	8078.67	40.84 AV	54	-13.16	-59.34	4.92	-54.42
5	18834.5	52.98 PK	74	-21.02	-47.2	4.92	-42.28
6	18834.5	41.36 AV	54	-12.64	-58.82	4.92	-53.9
7	23996.4	54.97 PK	74	-19.03	-45.21	4.92	-40.29
8	23996.4	43.65 AV	54	-10.35	-56.53	4.92	-51.61
9	38828.89	62.79 PK	74	-11.21	-37.39	4.92	-32.47
10	38828.89	49.11 AV	54	-4.89	-51.07	4.92	-46.15

Note: Margin value = Emission Level - Limit value

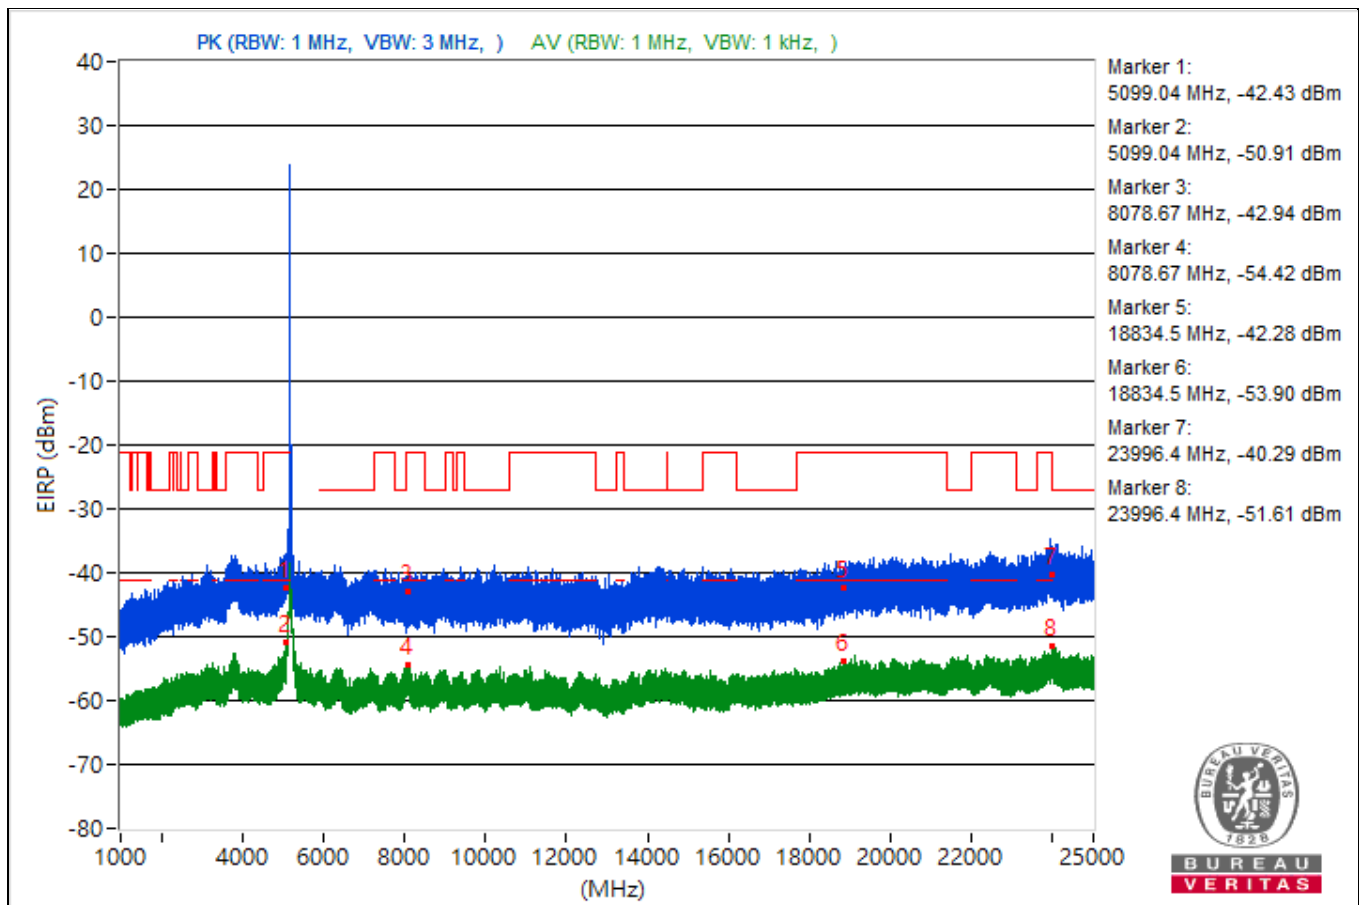


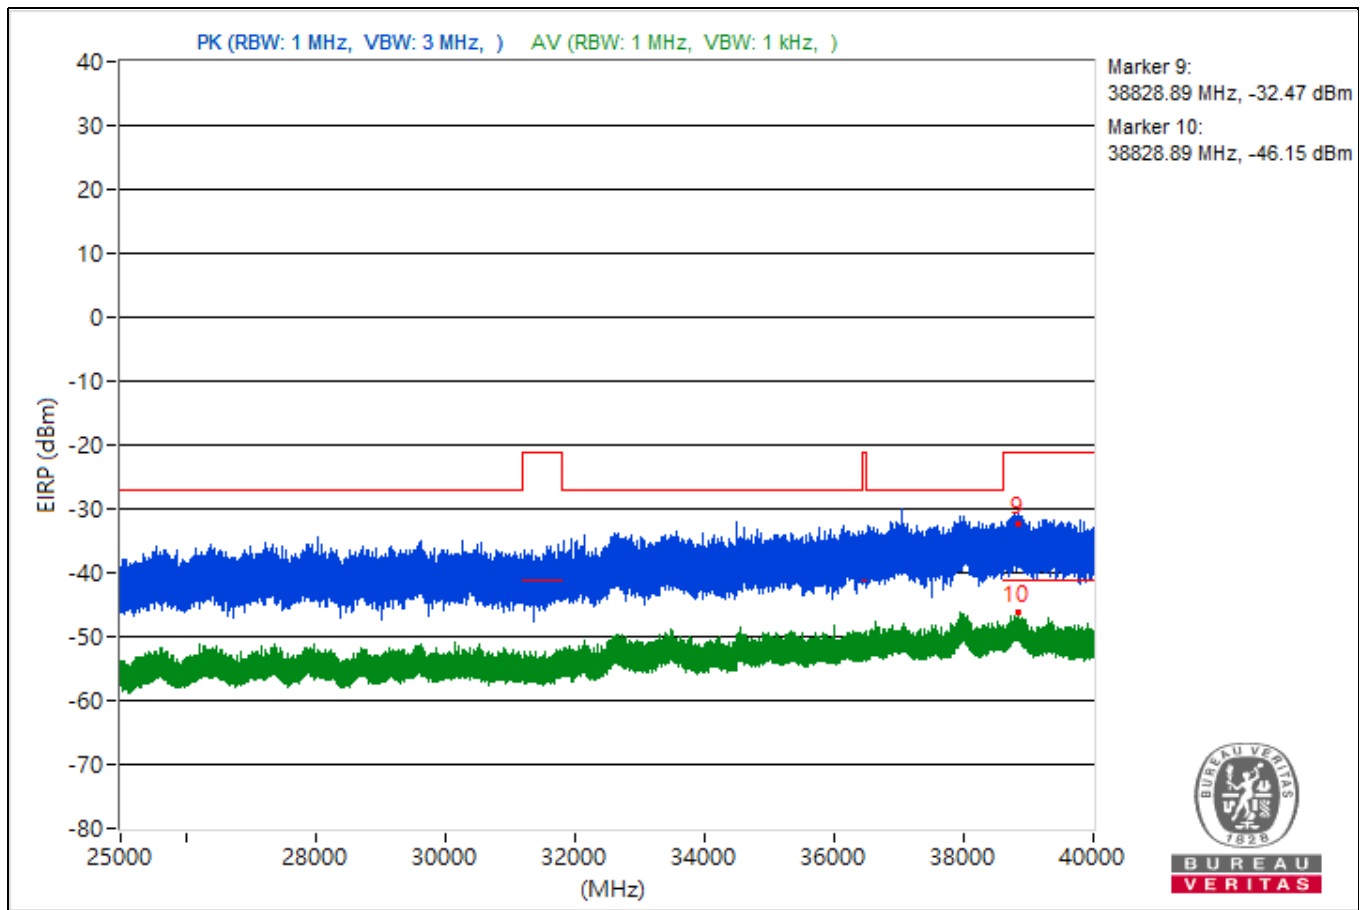


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5011	53.29 PK	74	-20.71	-46.89	4.92	-41.97
2	5011	42.75 AV	54	-11.25	-57.43	4.92	-52.51
3	8027.56	52.15 PK	74	-21.85	-48.03	4.92	-43.11
4	8027.56	40.78 AV	54	-13.22	-59.4	4.92	-54.48
5	18991.2	49.91 PK	74	-24.09	-50.27	4.92	-45.35
6	18991.2	41.21 AV	54	-12.79	-58.97	4.92	-54.05
7	23998.2	54.37 PK	74	-19.63	-45.81	4.92	-40.89
8	23998.2	44.17 AV	54	-9.83	-56.01	4.92	-51.09
9	38814.31	60.26 PK	74	-13.74	-39.92	4.92	-35
10	38814.31	49.06 AV	54	-4.94	-51.12	4.92	-46.2

Note: Margin value = Emission Level - Limit value

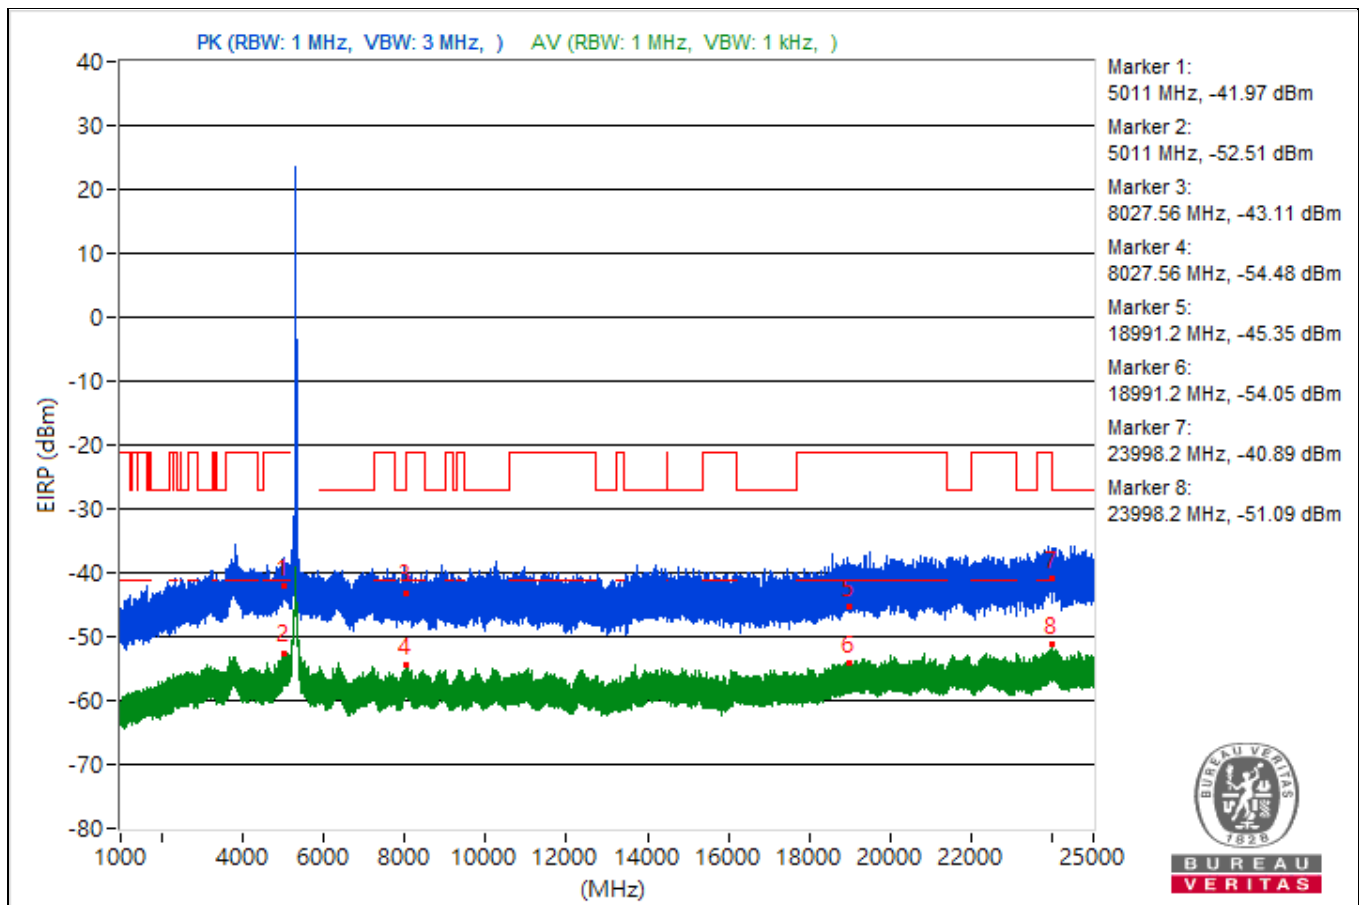


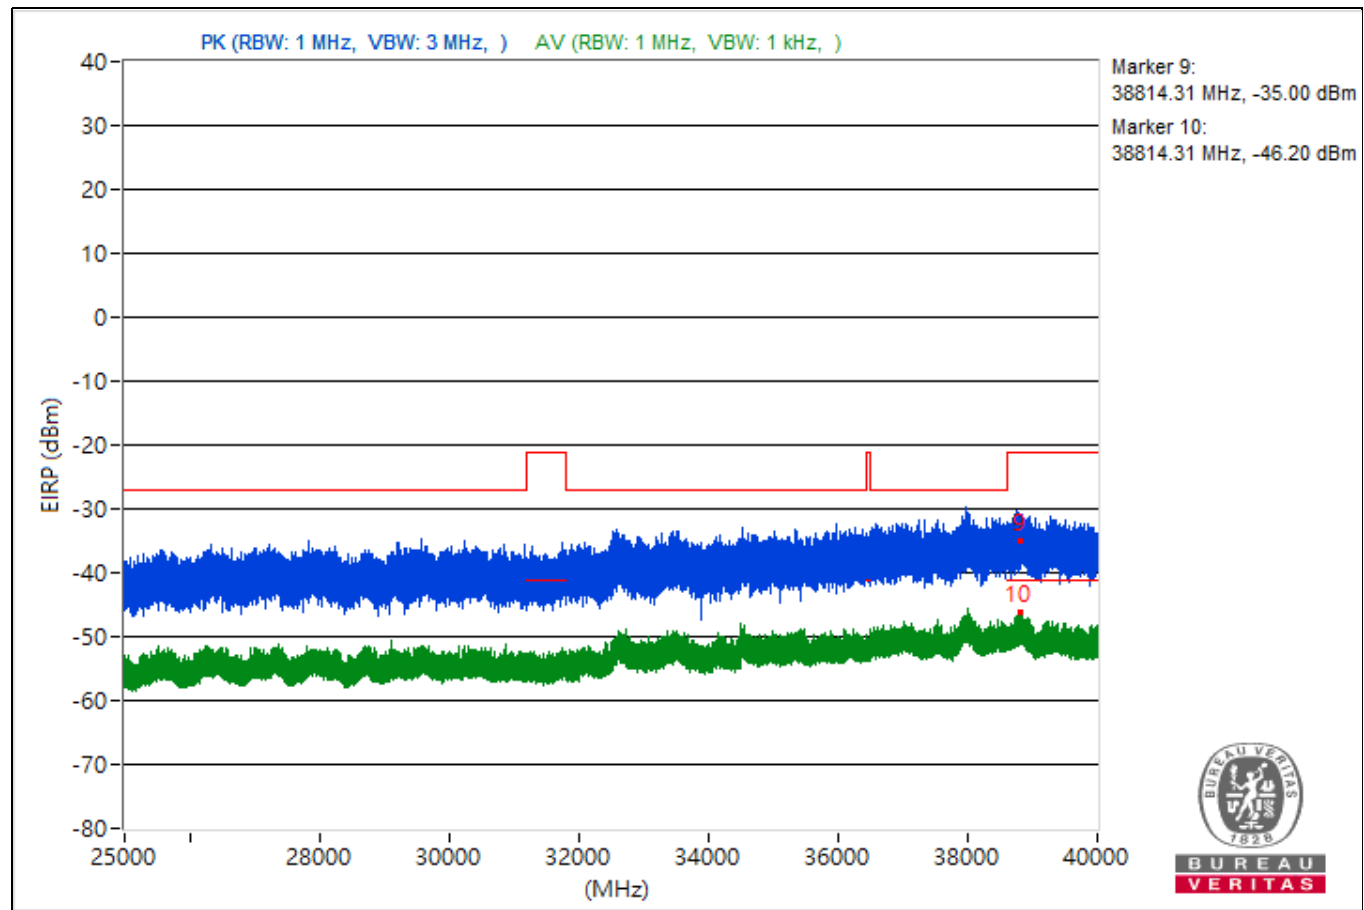


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5042.27	54.74 PK	74	-19.26	-45.44	4.92	-40.52
2	5042.27	42.63 AV	54	-11.37	-57.55	4.92	-52.63
3	8060.62	50.84 PK	74	-23.16	-49.34	4.92	-44.42
4	8060.62	41.22 AV	54	-12.78	-58.96	4.92	-54.04
5	18638.9	52.71 PK	74	-21.29	-47.47	4.92	-42.55
6	18638.9	41.76 AV	54	-12.24	-58.42	4.92	-53.5
7	23982.1	52.7 PK	74	-21.3	-47.48	4.92	-42.56
8	23982.1	43.93 AV	54	-10.07	-56.25	4.92	-51.33
9	38828.53	60.22 PK	74	-13.78	-39.96	4.92	-35.04
10	38828.53	48.78 AV	54	-5.22	-51.4	4.92	-46.48

Note: Margin value = Emission Level - Limit value

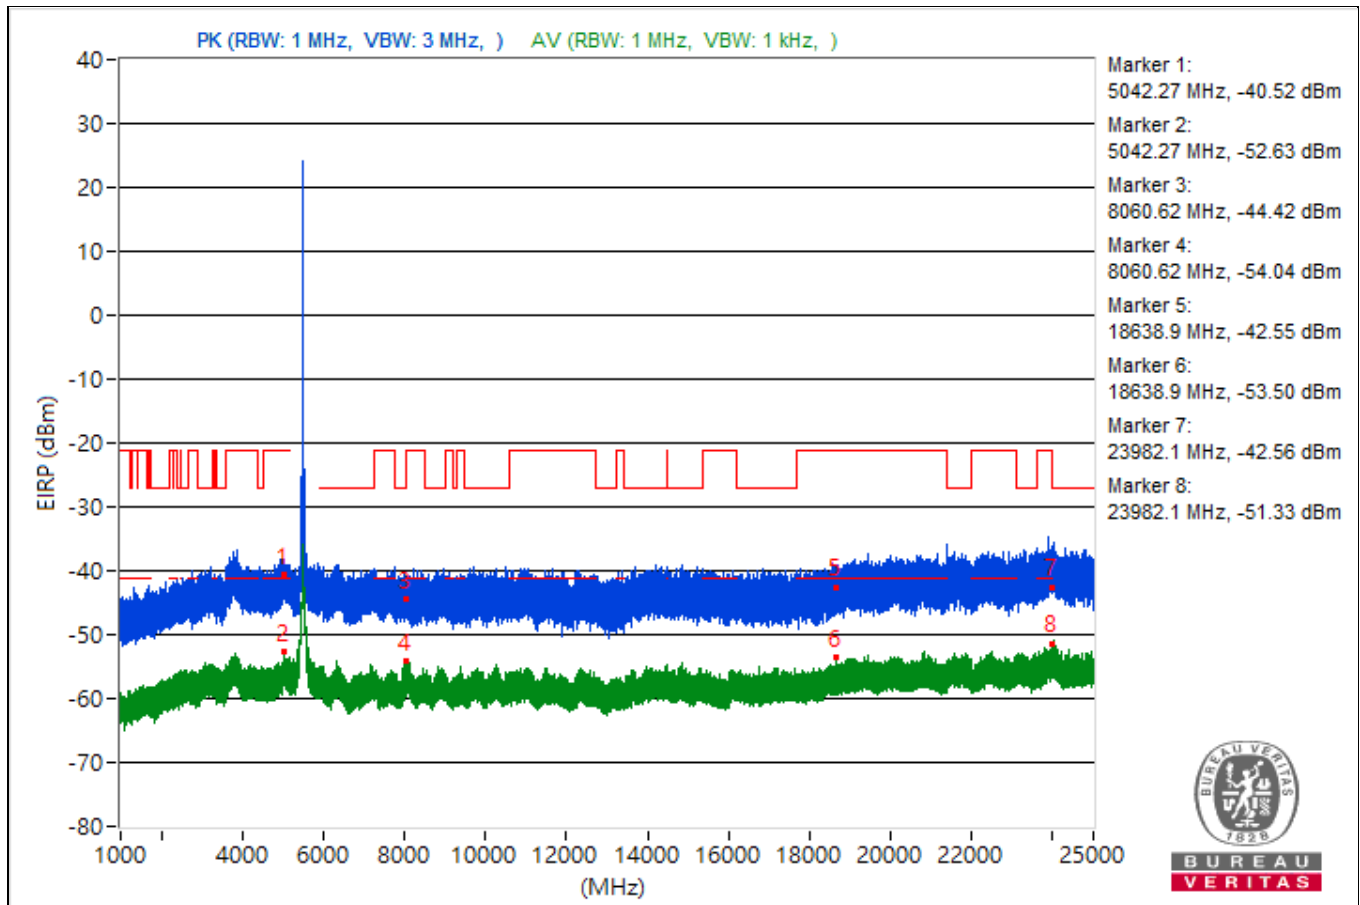


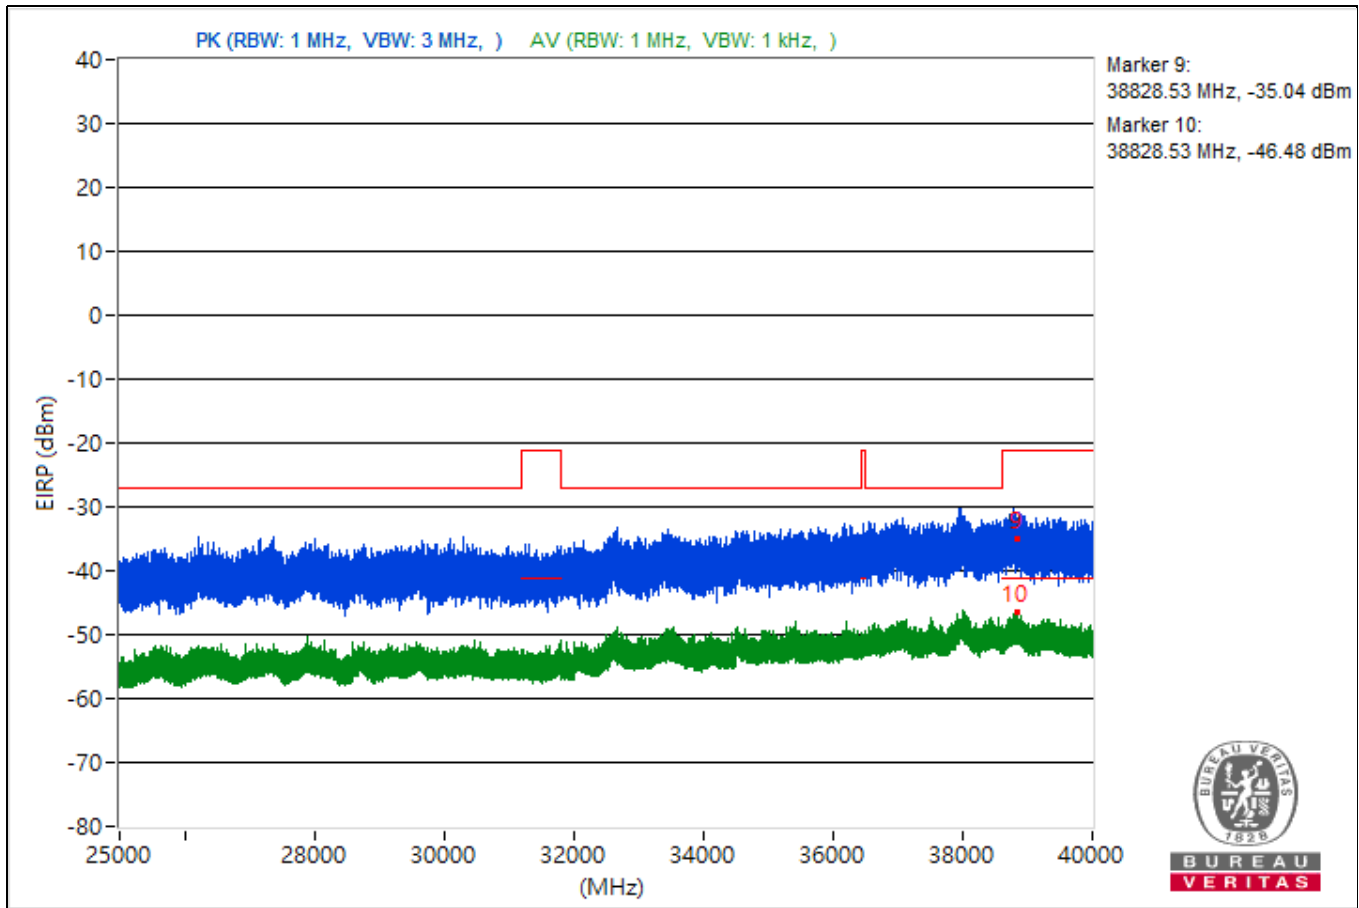


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4904.68	51.83 PK	74	-22.17	-48.35	4.92	-43.43
2	4904.68	42.1 AV	54	-11.9	-58.08	4.92	-53.16
3	8095.02	48.91 PK	74	-25.09	-51.27	4.92	-46.35
4	8095.02	40.89 AV	54	-13.11	-59.29	4.92	-54.37
5	18947.7	54.25 PK	74	-19.75	-45.93	4.92	-41.01
6	18947.7	41.4 AV	54	-12.6	-58.78	4.92	-53.86
7	23952.1	55.73 PK	74	-18.27	-44.45	4.92	-39.53
8	23952.1	44.62 AV	54	-9.38	-55.56	4.92	-50.64
9	38829.33	60.02 PK	74	-13.98	-40.16	4.92	-35.24
10	38829.33	48.69 AV	54	-5.31	-51.49	4.92	-46.57

Note: Margin value = Emission Level - Limit value

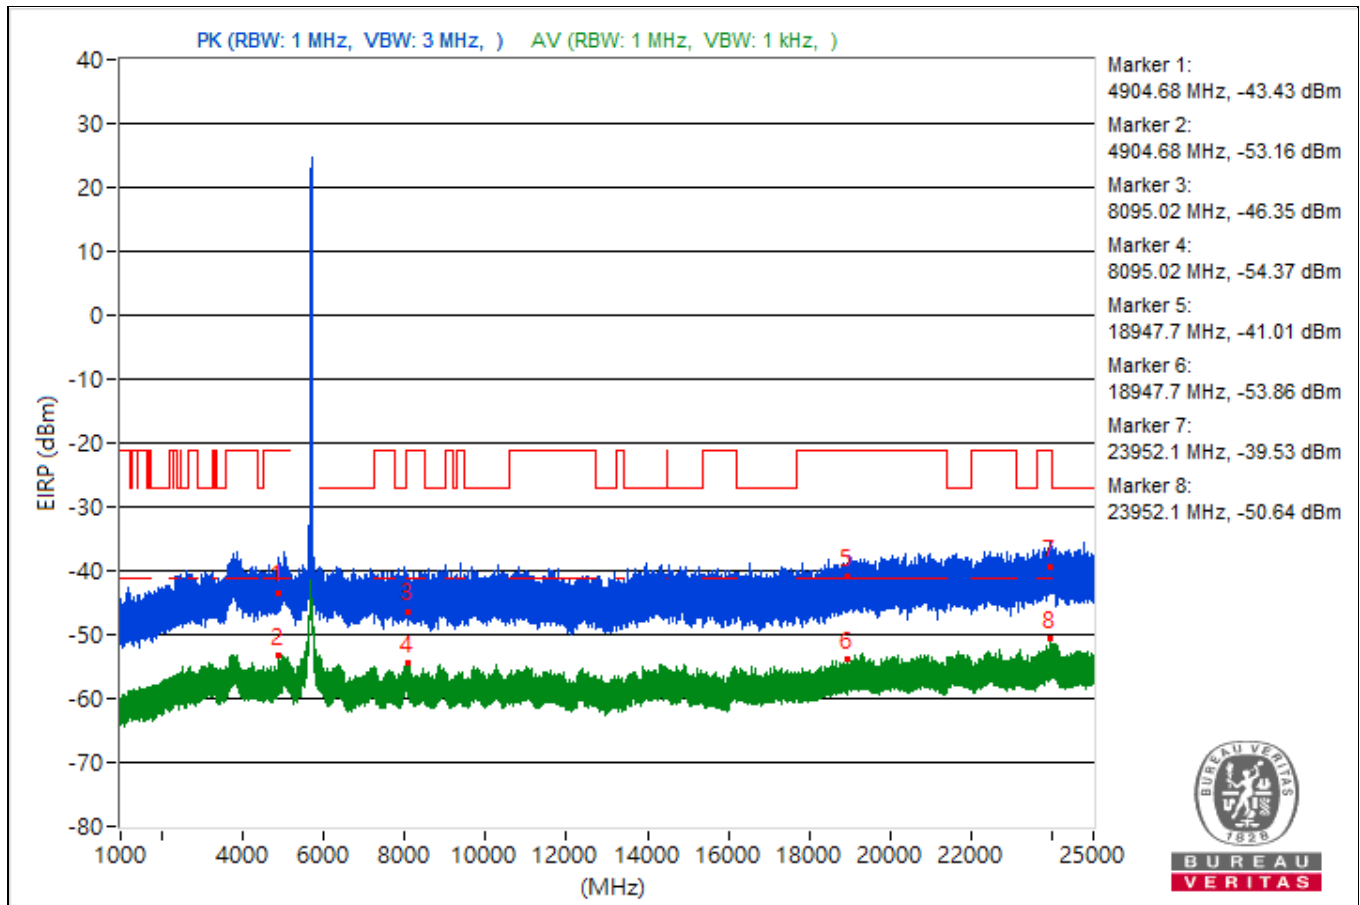


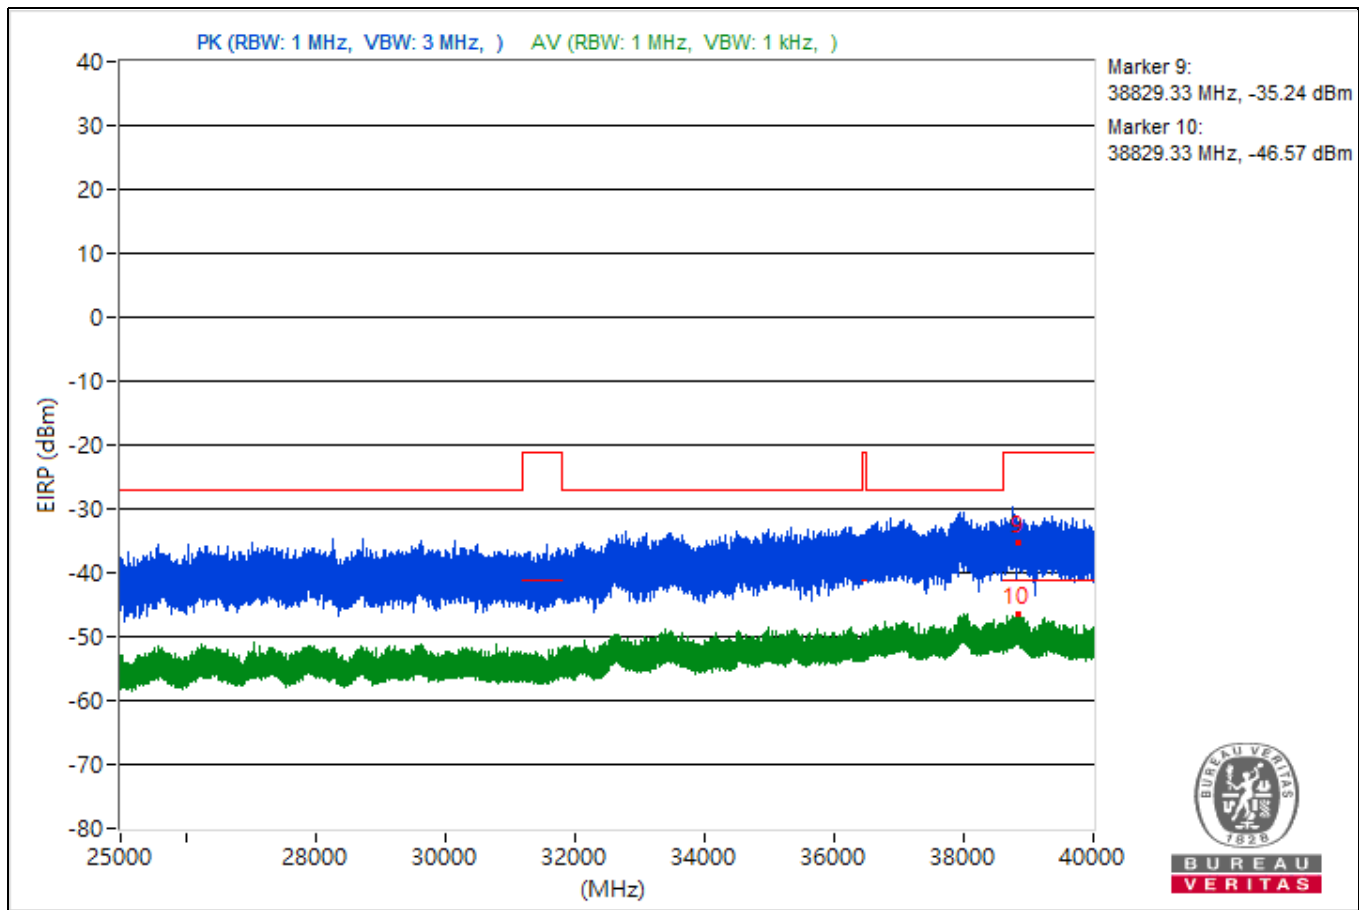


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3841.61	52.64 PK	74	-21.36	-47.54	4.92	-42.62
2	3841.61	42.12 AV	54	-11.88	-58.06	4.92	-53.14
3	8032.09	50.83 PK	74	-23.17	-49.35	4.92	-44.43
4	8032.09	41.16 AV	54	-12.84	-59.02	4.92	-54.1
5	18758.2	55.48 PK	74	-18.52	-44.7	4.92	-39.78
6	18758.2	41.78 AV	54	-12.22	-58.4	4.92	-53.48
7	23940.7	55.27 PK	74	-18.73	-44.91	4.92	-39.99
8	23940.7	44.28 AV	54	-9.72	-55.9	4.92	-50.98
9	38835.29	59.62 PK	74	-14.38	-40.56	4.92	-35.64
10	38835.29	49.24 AV	54	-4.76	-50.94	4.92	-46.02

Note: Margin value = Emission Level - Limit value

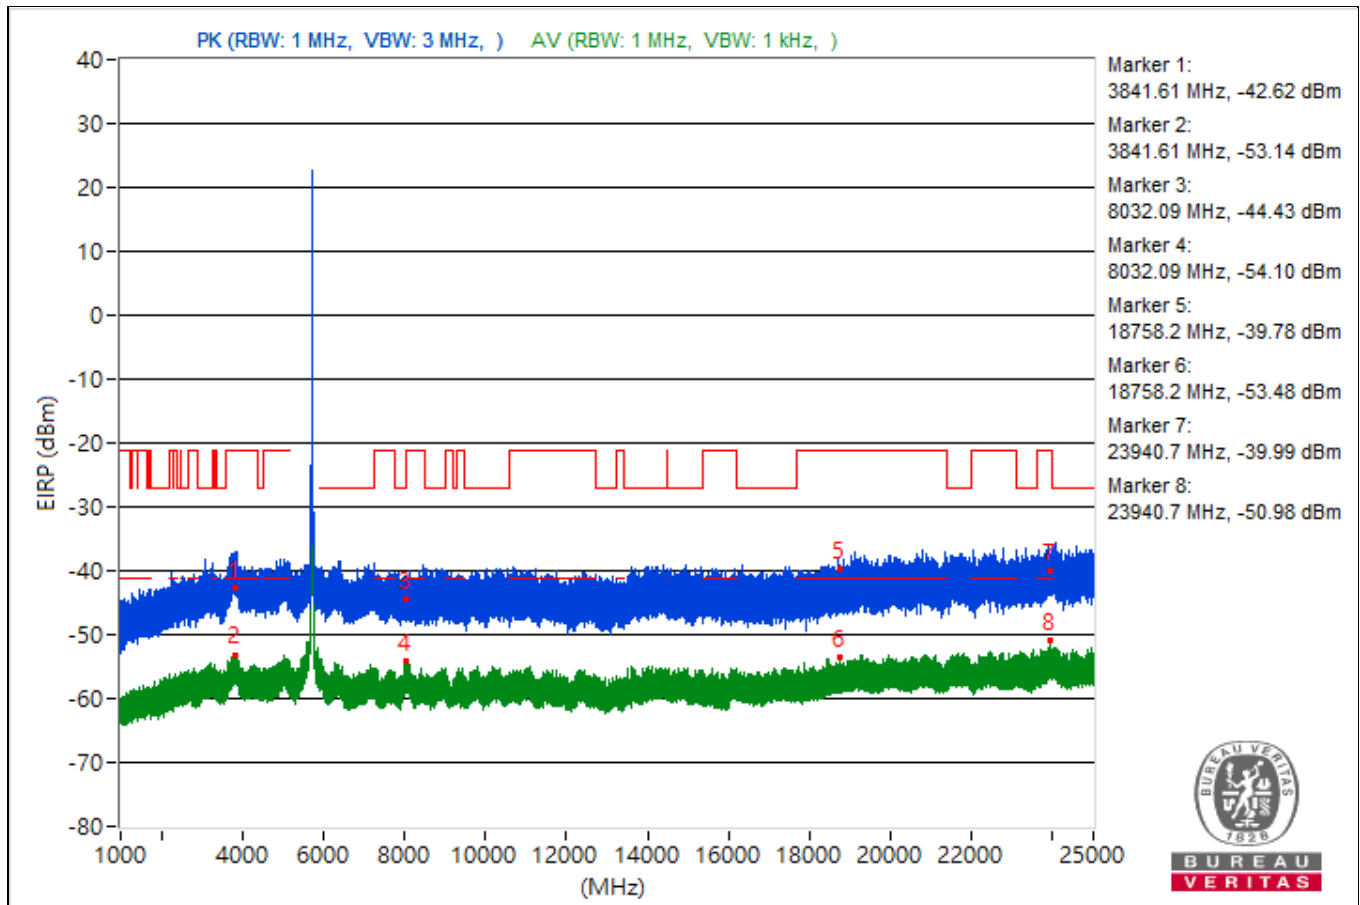


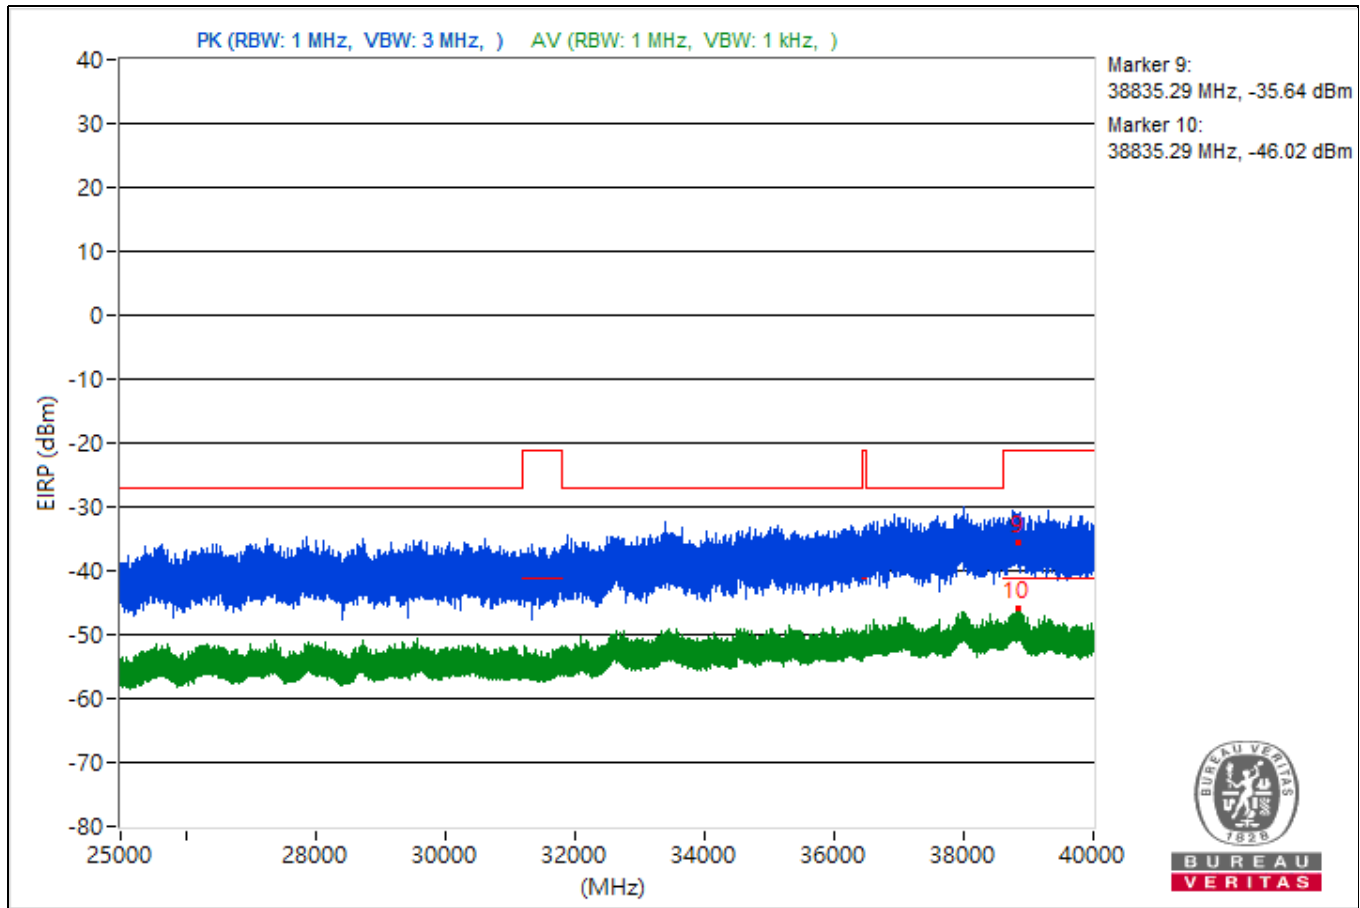


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3765.86	55.74 PK	74	-18.26	-44.44	4.92	-39.52
2	3765.86	42.88 AV	54	-11.12	-57.3	4.92	-52.38
3	8028.8	52.91 PK	74	-21.09	-47.27	4.92	-42.35
4	8028.8	41.29 AV	54	-12.71	-58.89	4.92	-53.97
5	18985.4	53.7 PK	74	-20.3	-46.48	4.92	-41.56
6	18985.4	41.45 AV	54	-12.55	-58.73	4.92	-53.81
7	23974	55.54 PK	74	-18.46	-44.64	4.92	-39.72
8	23974	43.6 AV	54	-10.4	-56.58	4.92	-51.66
9	38833.16	61.68 PK	74	-12.32	-38.5	4.92	-33.58
10	38833.16	48.67 AV	54	-5.33	-51.51	4.92	-46.59

Note: Margin value = Emission Level - Limit value

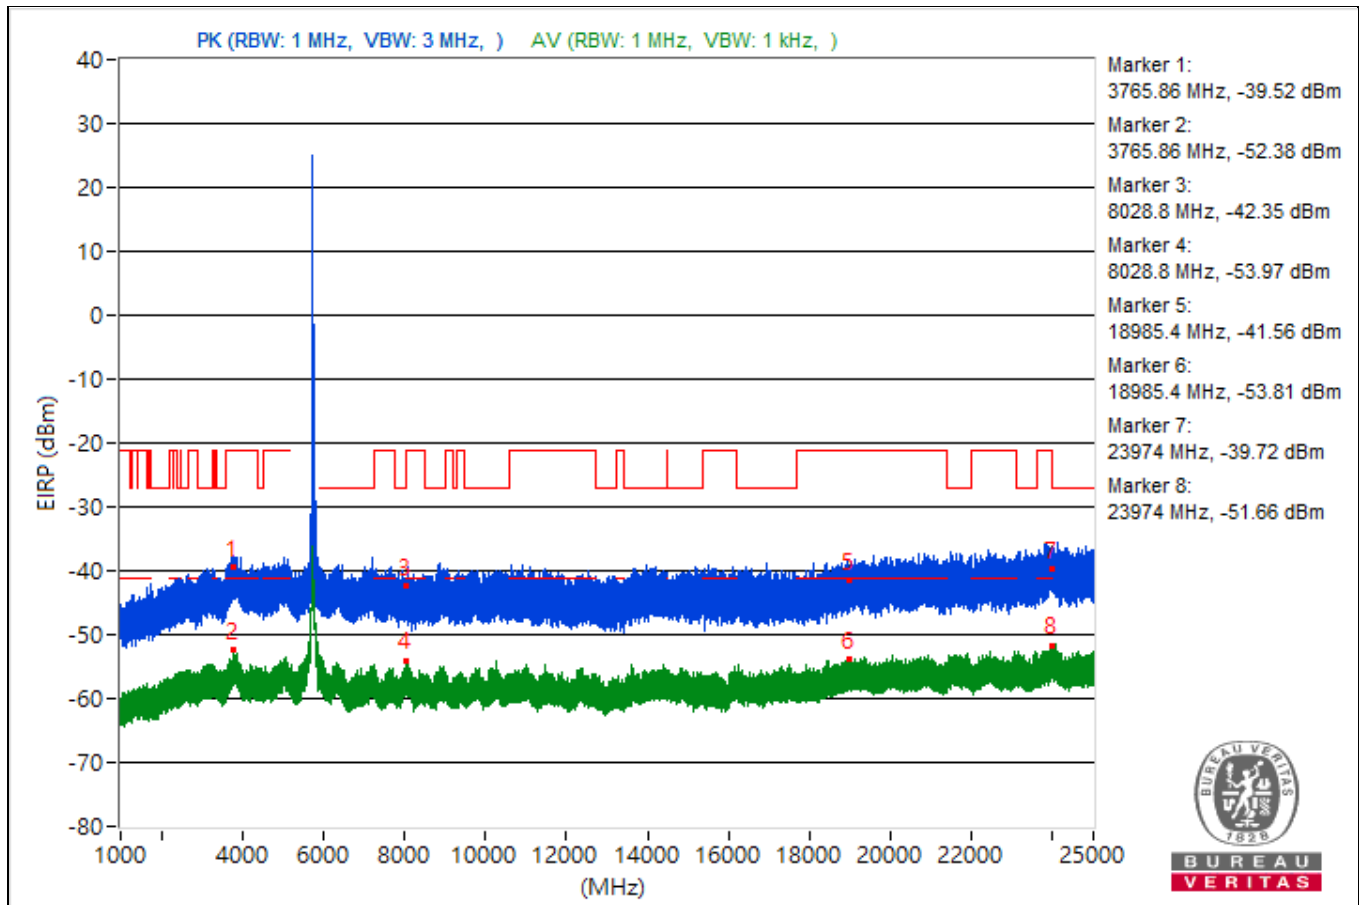


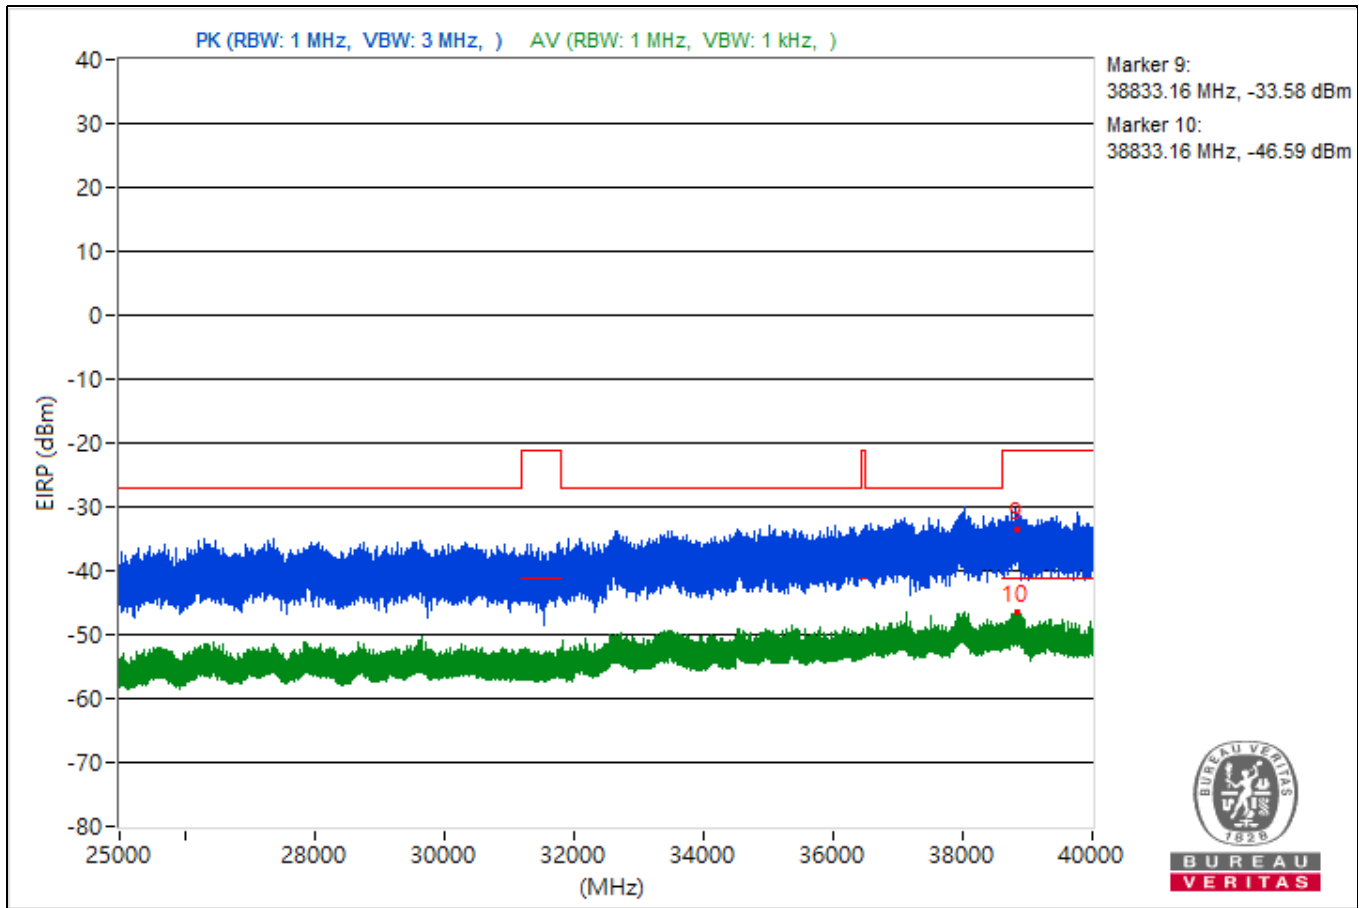


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5023.13	55.08 PK	74	-18.92	-45.1	4.92	-40.18
2	5023.13	42.87 AV	54	-11.13	-57.31	4.92	-52.39
3	8082.84	52.3 PK	74	-21.7	-47.88	4.92	-42.96
4	8082.84	41.06 AV	54	-12.94	-59.12	4.92	-54.2
5	18716.5	53.48 PK	74	-20.52	-46.7	4.92	-41.78
6	18716.5	41.79 AV	54	-12.21	-58.39	4.92	-53.47
7	23956.8	54.81 PK	74	-19.19	-45.37	4.92	-40.45
8	23956.8	43.43 AV	54	-10.57	-56.75	4.92	-51.83
9	38765.78	60.33 PK	74	-13.67	-39.85	4.92	-34.93
10	38765.78	48.82 AV	54	-5.18	-51.36	4.92	-46.44

Note: Margin value = Emission Level - Limit value

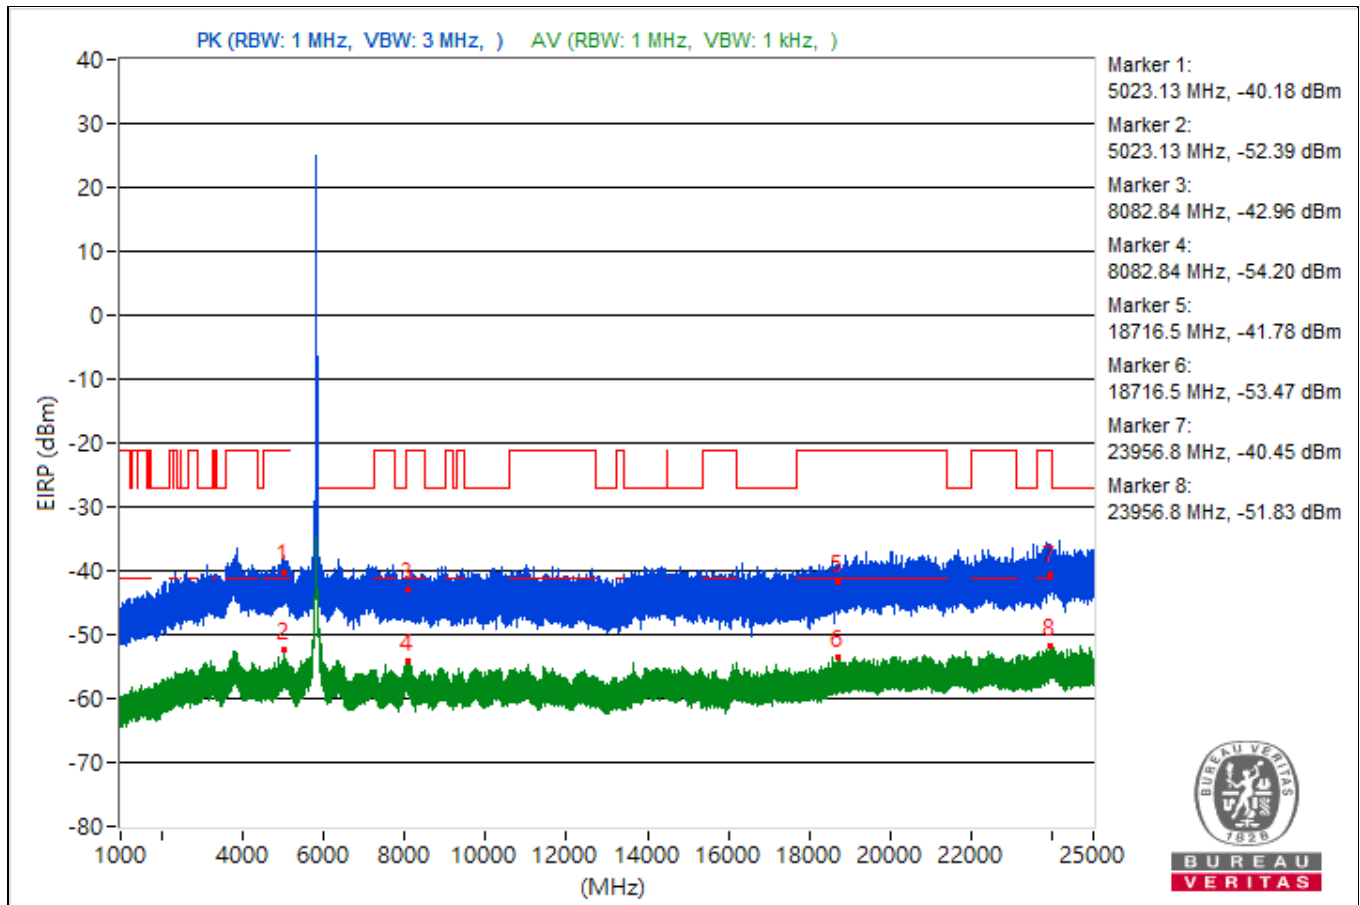


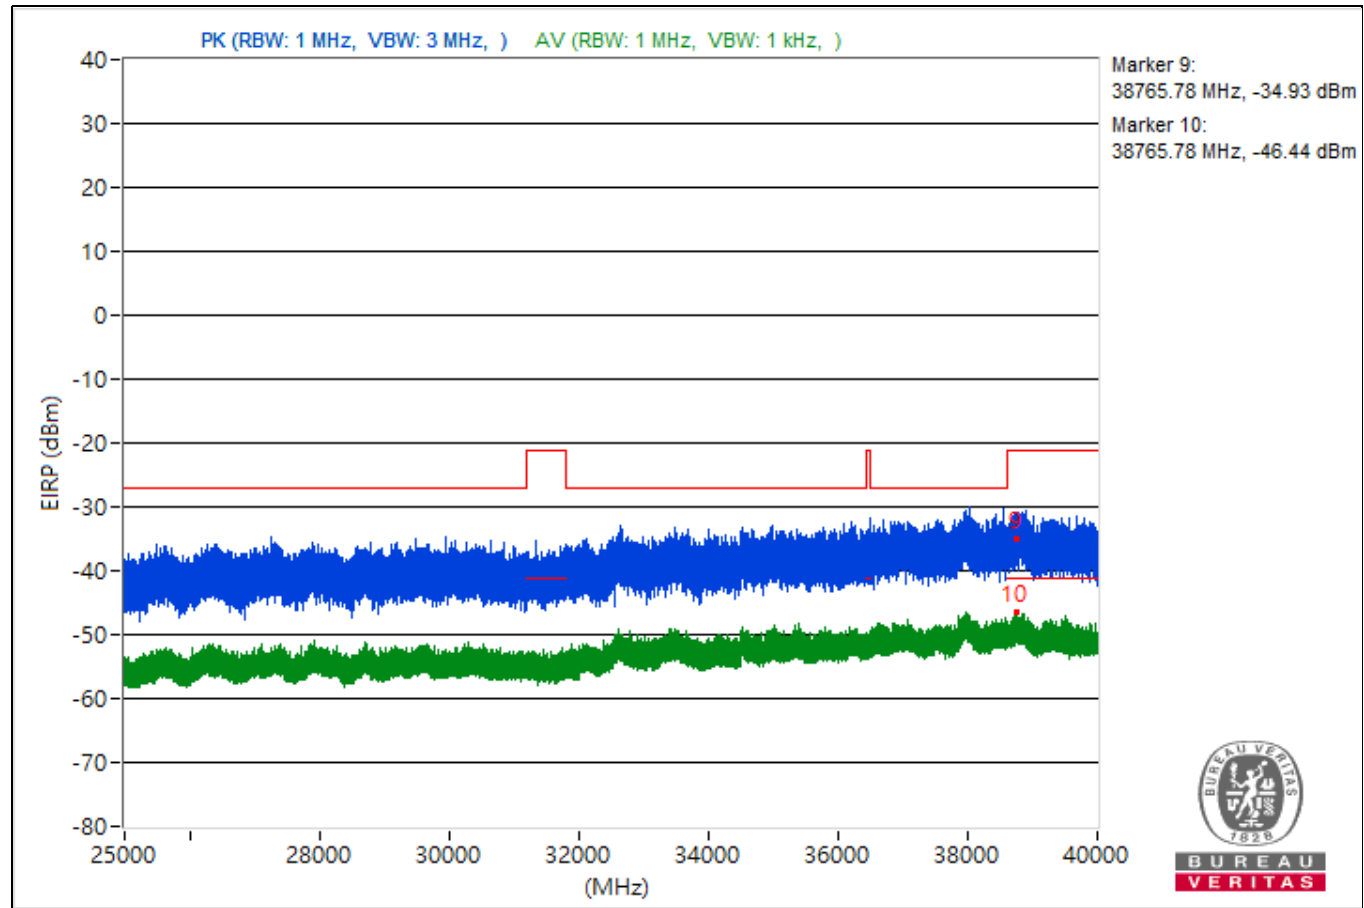


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.73	55.56 PK	74	-18.44	-44.62	4.92	-39.7
2	5098.73	44.59 AV	54	-9.41	-55.59	4.92	-50.67
3	7656.14	50.02 PK	74	-23.98	-50.16	4.92	-45.24
4	7656.14	40.38 AV	54	-13.62	-59.8	4.92	-54.88
5	18721	53.4 PK	74	-20.6	-46.78	4.92	-41.86
6	18721	41.2 AV	54	-12.8	-58.98	4.92	-54.06
7	23939	56.29 PK	74	-17.71	-43.89	4.92	-38.97
8	23939	43.23 AV	54	-10.77	-56.95	4.92	-52.03
9	38801.07	61.78 PK	74	-12.22	-38.4	4.92	-33.48
10	38801.07	48 AV	54	-6	-52.18	4.92	-47.26

Note: Margin value = Emission Level - Limit value

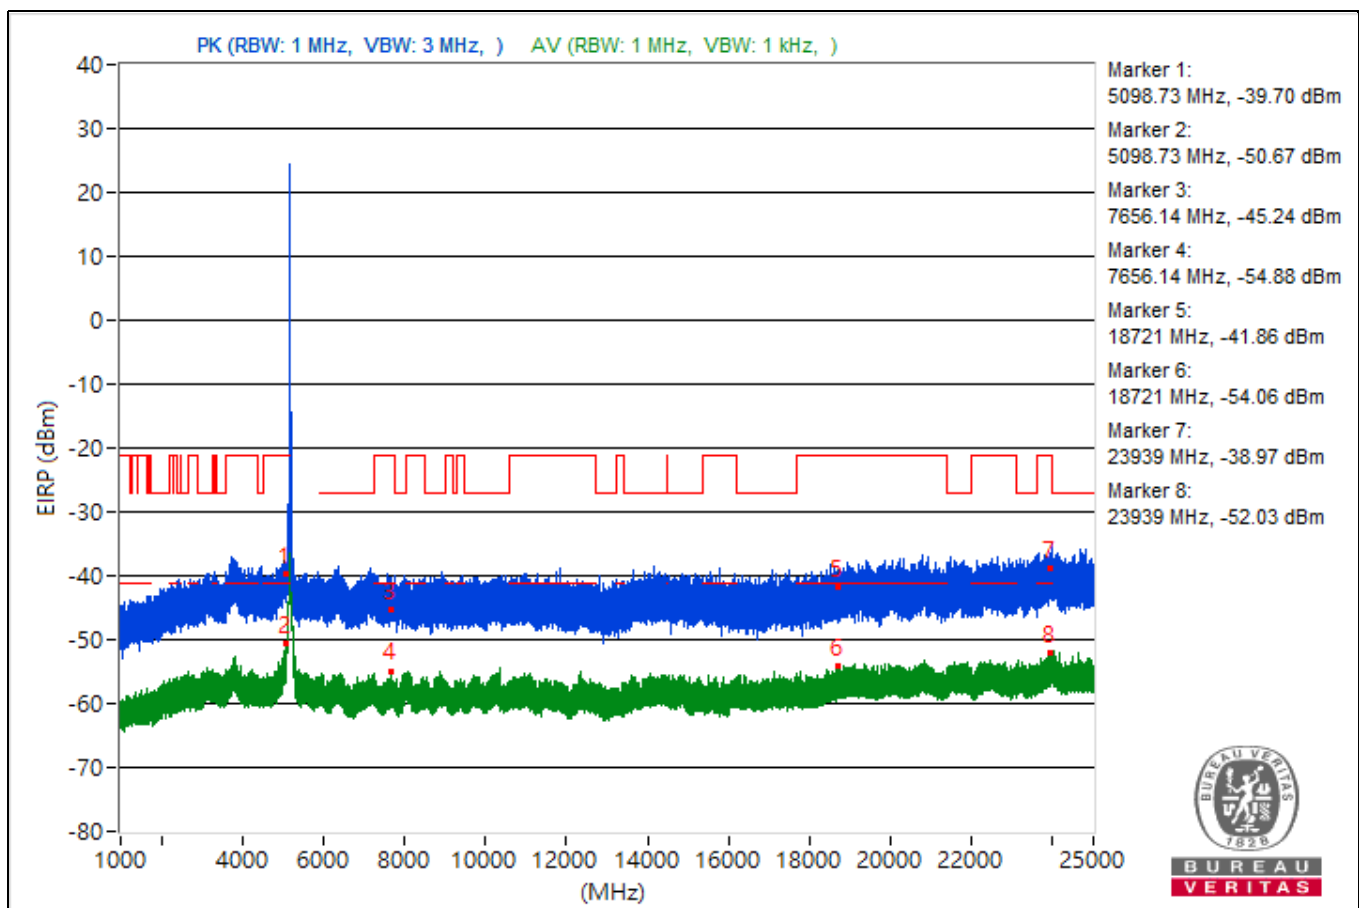


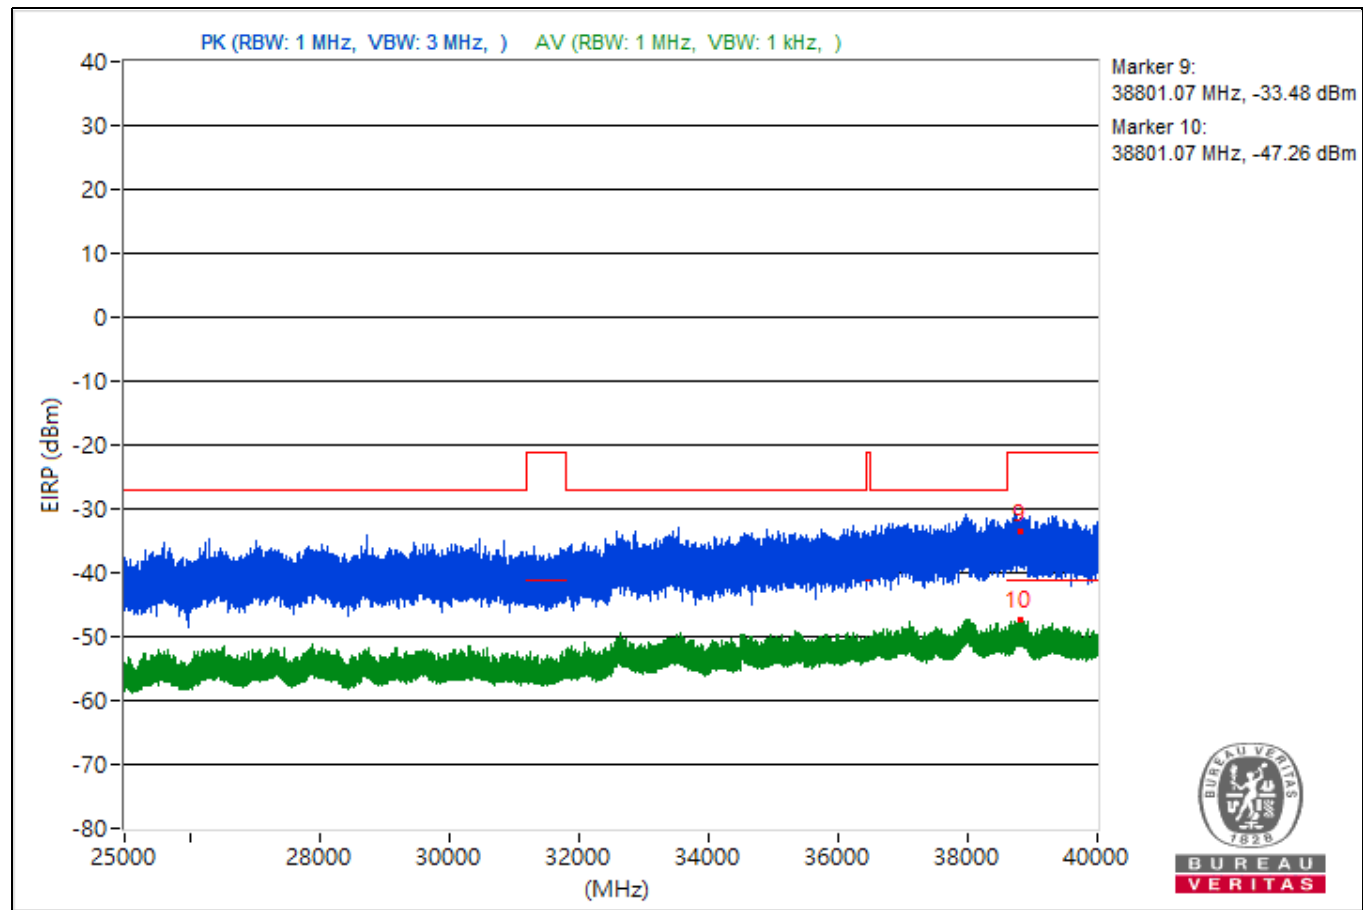


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.01	53.36 PK	74	-20.64	-46.82	4.92	-41.9
2	5096.01	42.19 AV	54	-11.81	-57.99	4.92	-53.07
3	11641.07	50.91 PK	74	-23.09	-49.27	4.92	-44.35
4	11641.07	40.3 AV	54	-13.7	-59.88	4.92	-54.96
5	18930.1	51.01 PK	74	-22.99	-49.17	4.92	-44.25
6	18930.1	40.87 AV	54	-13.13	-59.31	4.92	-54.39
7	23996.6	52.75 PK	74	-21.25	-47.43	4.92	-42.51
8	23996.6	42.56 AV	54	-11.44	-57.62	4.92	-52.7
9	38783.02	60.9 PK	74	-13.1	-39.28	4.92	-34.36
10	38783.02	48.41 AV	54	-5.59	-51.77	4.92	-46.85

Note: Margin value = Emission Level - Limit value

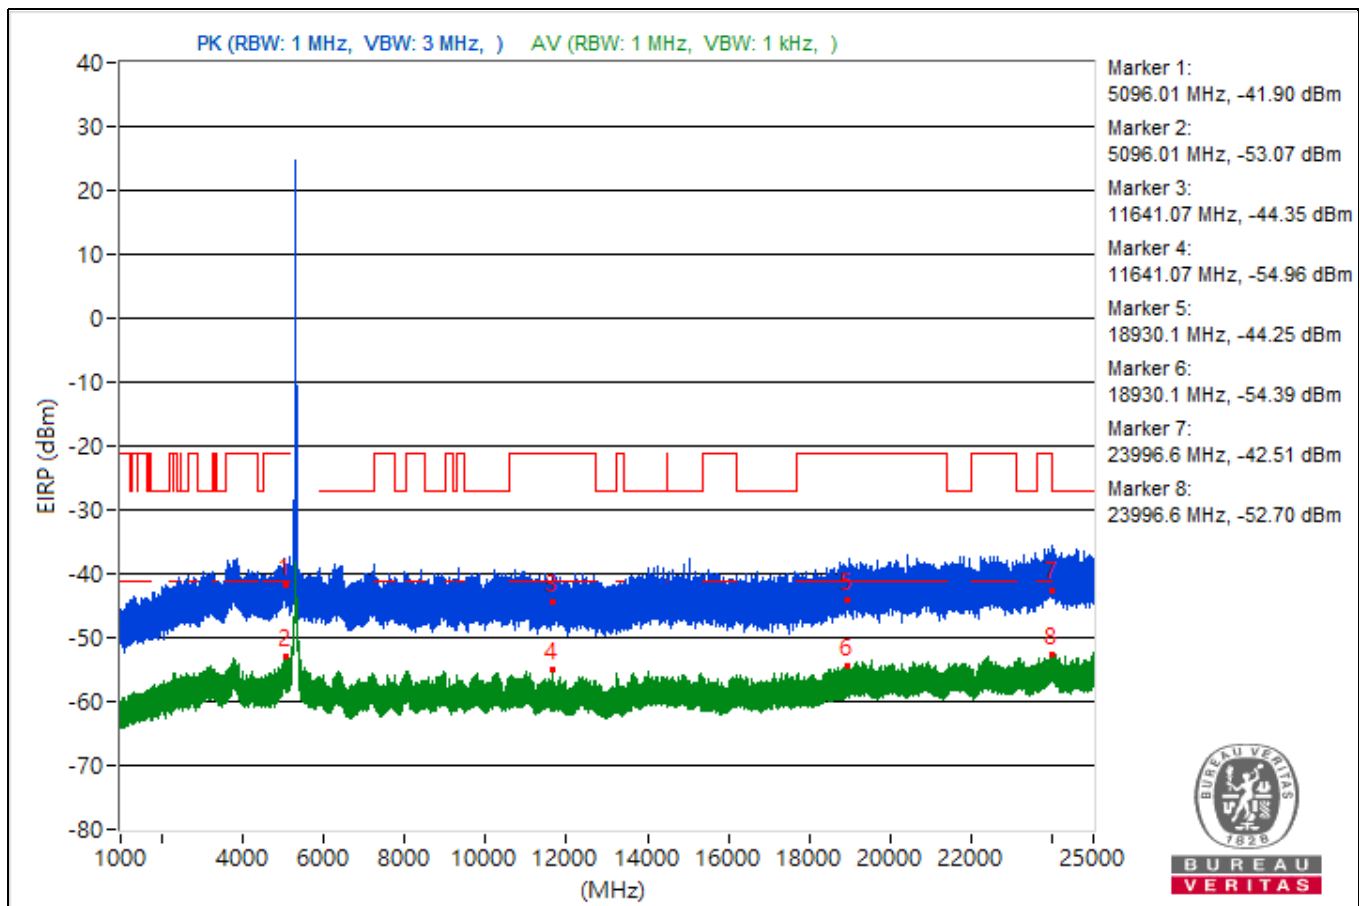


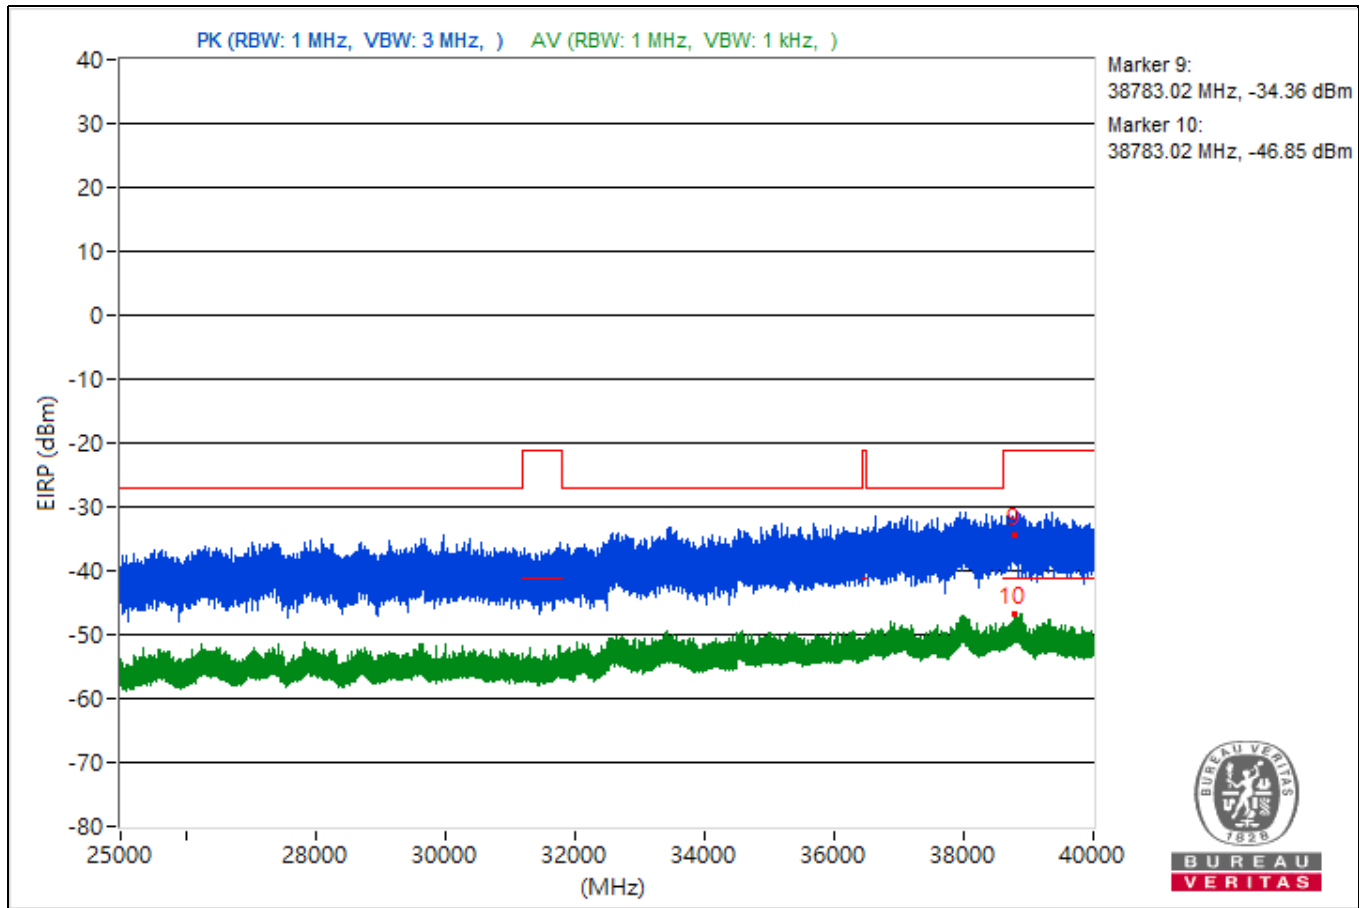


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3846.82	54.03 PK	74	-19.97	-46.15	4.92	-41.23
2	3846.82	41.84 AV	54	-12.16	-58.34	4.92	-53.42
3	8089.07	50.08 PK	74	-23.92	-50.1	4.92	-45.18
4	8089.07	40.4 AV	54	-13.6	-59.78	4.92	-54.86
5	18966.1	52.76 PK	74	-21.24	-47.42	4.92	-42.5
6	18966.1	41.34 AV	54	-12.66	-58.84	4.92	-53.92
7	23979.2	56.84 PK	74	-17.16	-43.34	4.92	-38.42
8	23979.2	44.26 AV	54	-9.74	-55.92	4.92	-51
9	38801.33	60.6 PK	74	-13.4	-39.58	4.92	-34.66
10	38801.33	48.38 AV	54	-5.62	-51.8	4.92	-46.88

Note: Margin value = Emission Level - Limit value

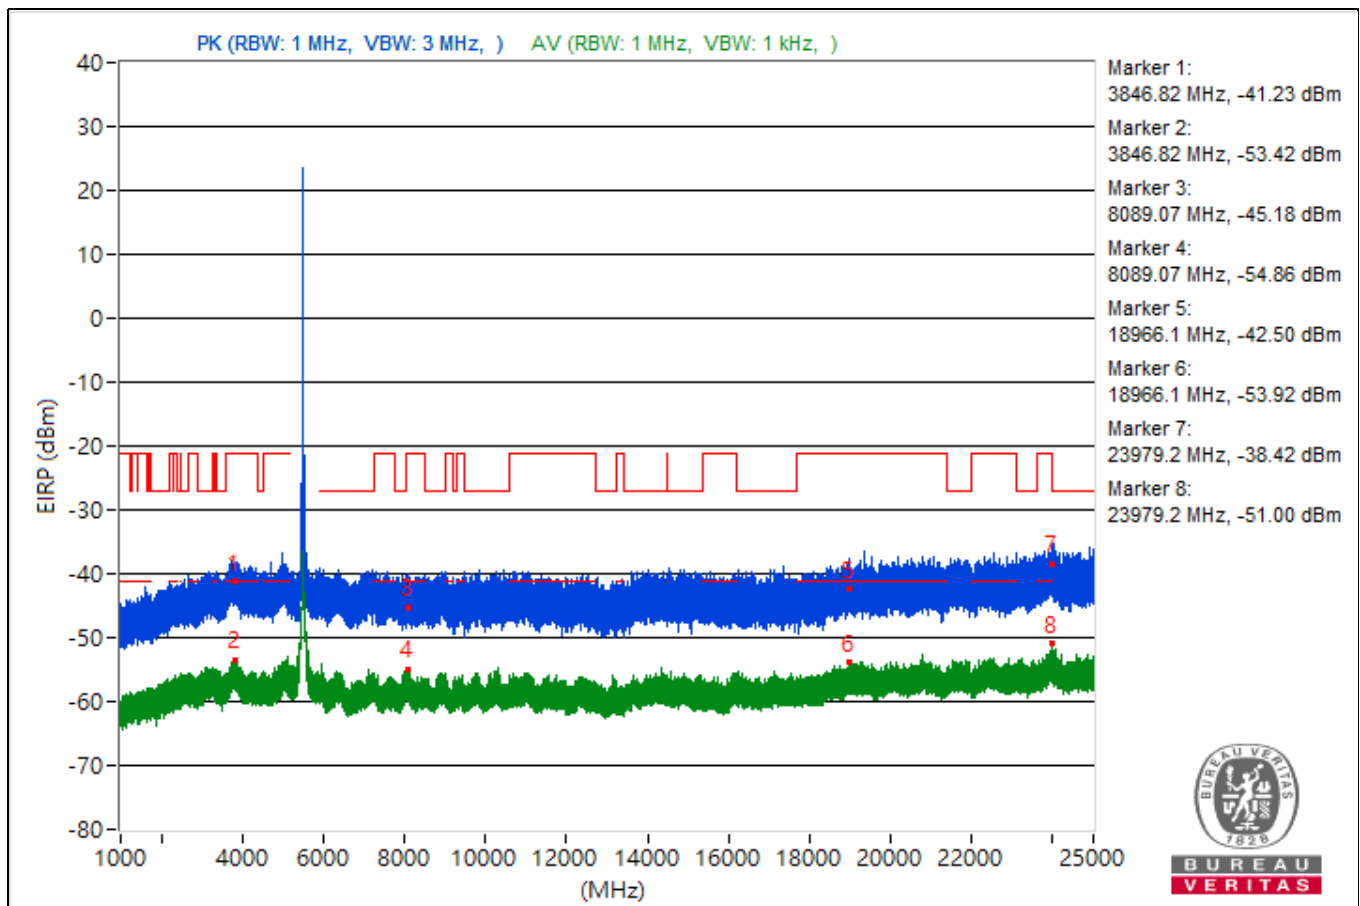


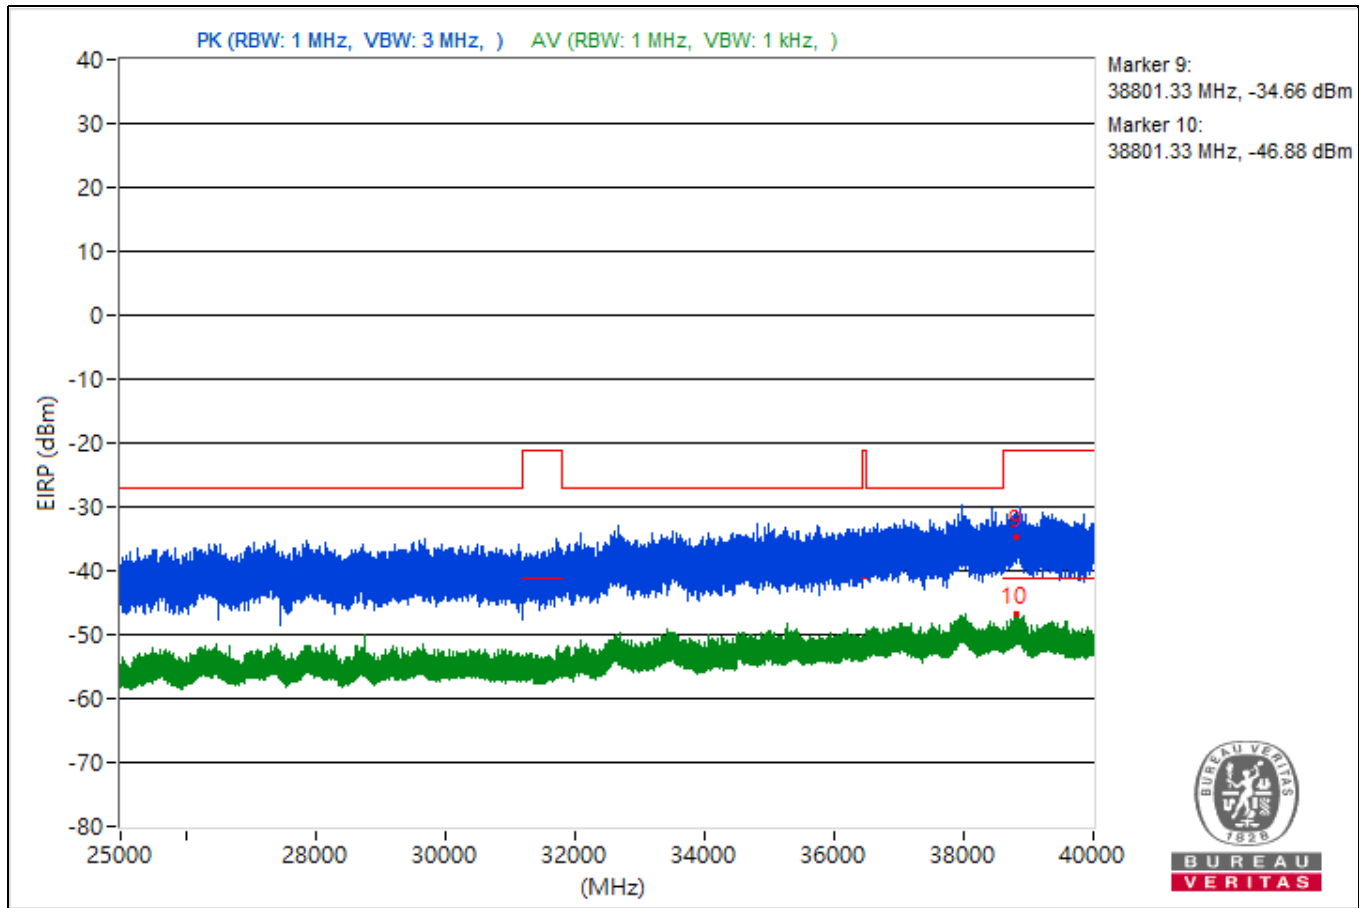


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5015.28	53.48 PK	74	-20.52	-46.7	4.92	-41.78
2	5015.28	41.2 AV	54	-12.8	-58.98	4.92	-54.06
3	8074.04	54.78 PK	74	-19.22	-45.4	4.92	-40.48
4	8074.04	40.31 AV	54	-13.69	-59.87	4.92	-54.95
5	18640.1	52.3 PK	74	-21.7	-47.88	4.92	-42.96
6	18640.1	40.96 AV	54	-13.04	-59.22	4.92	-54.3
7	23960.7	54.69 PK	74	-19.31	-45.49	4.92	-40.57
8	23960.7	43.54 AV	54	-10.46	-56.64	4.92	-51.72
9	38840	60.7 PK	74	-13.3	-39.48	4.92	-34.56
10	38840	48.62 AV	54	-5.38	-51.56	4.92	-46.64

Note: Margin value = Emission Level - Limit value

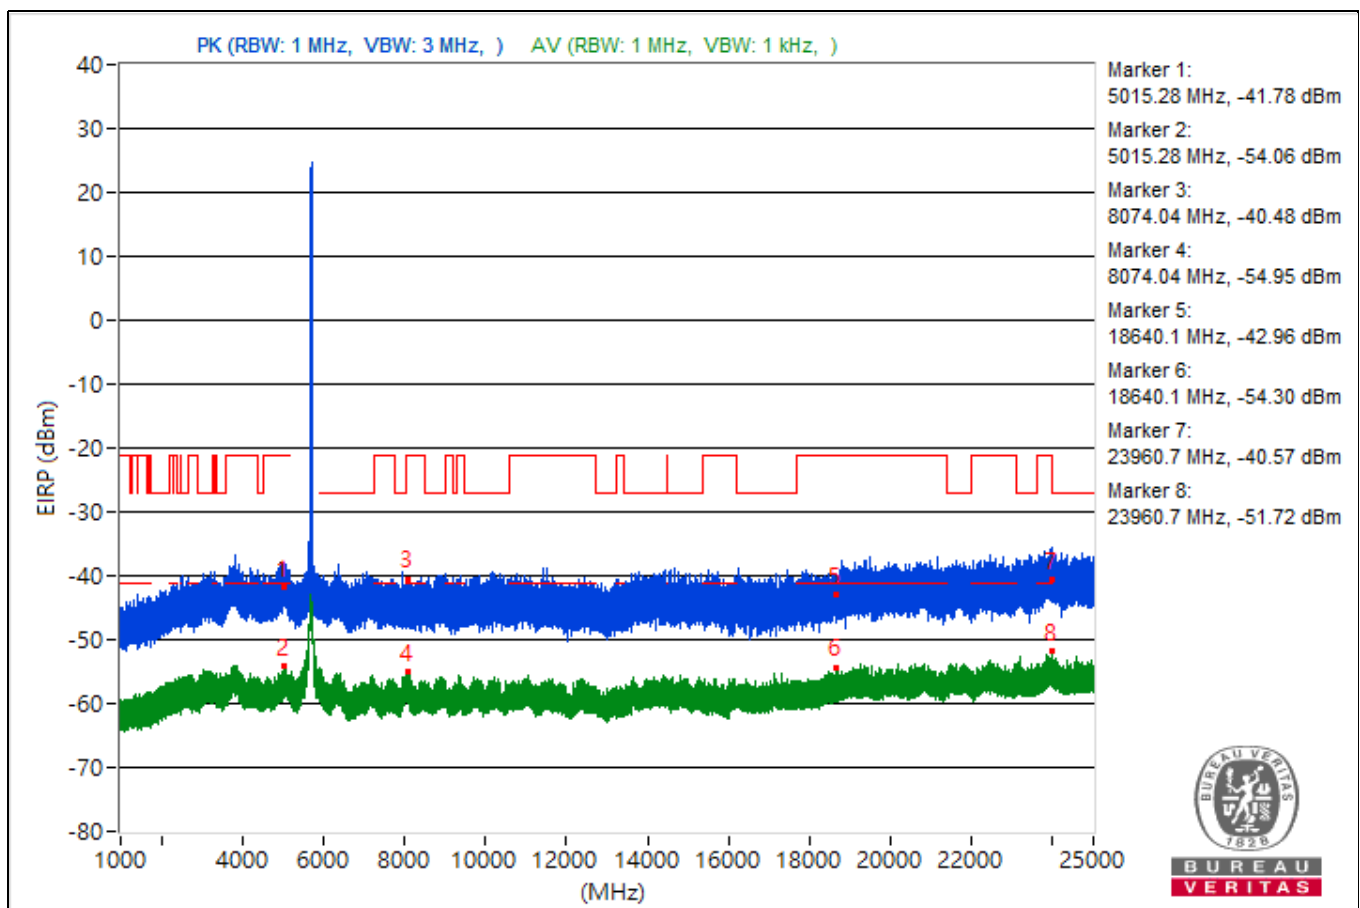


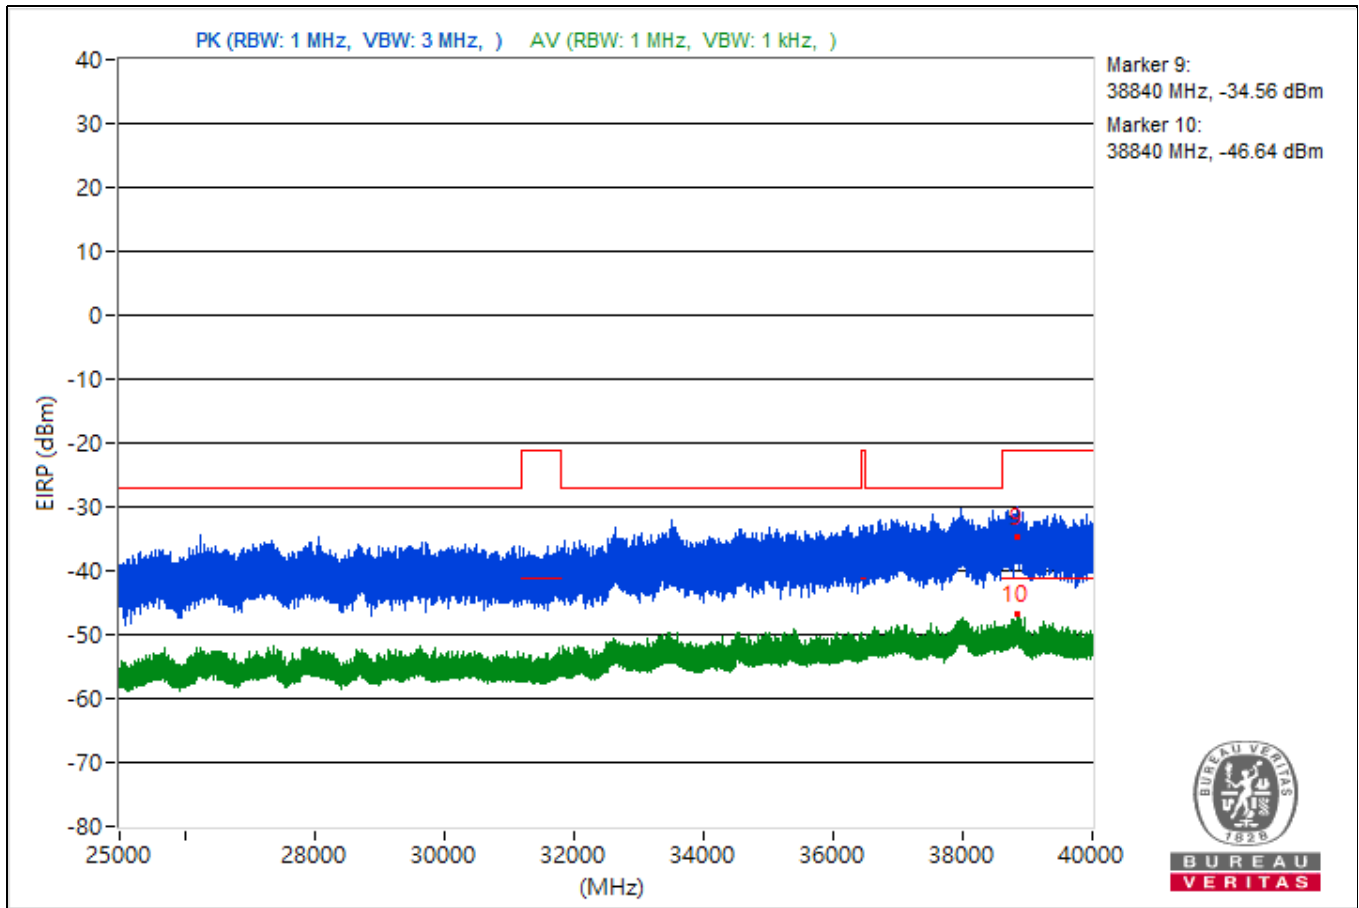


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3840.83	54.33 PK	74	-19.67	-45.85	4.92	-40.93
2	3840.83	41.9 AV	54	-12.1	-58.28	4.92	-53.36
3	8038.76	52.8 PK	74	-21.2	-47.38	4.92	-42.46
4	8038.76	39.91 AV	54	-14.09	-60.27	4.92	-55.35
5	18678.9	53.77 PK	74	-20.23	-46.41	4.92	-41.49
6	18678.9	40.72 AV	54	-13.28	-59.46	4.92	-54.54
7	23973.3	53.44 PK	74	-20.56	-46.74	4.92	-41.82
8	23973.3	42.56 AV	54	-11.44	-57.62	4.92	-52.7
9	38783.47	60.17 PK	74	-13.83	-40.01	4.92	-35.09
10	38783.47	48.12 AV	54	-5.88	-52.06	4.92	-47.14

Note: Margin value = Emission Level - Limit value

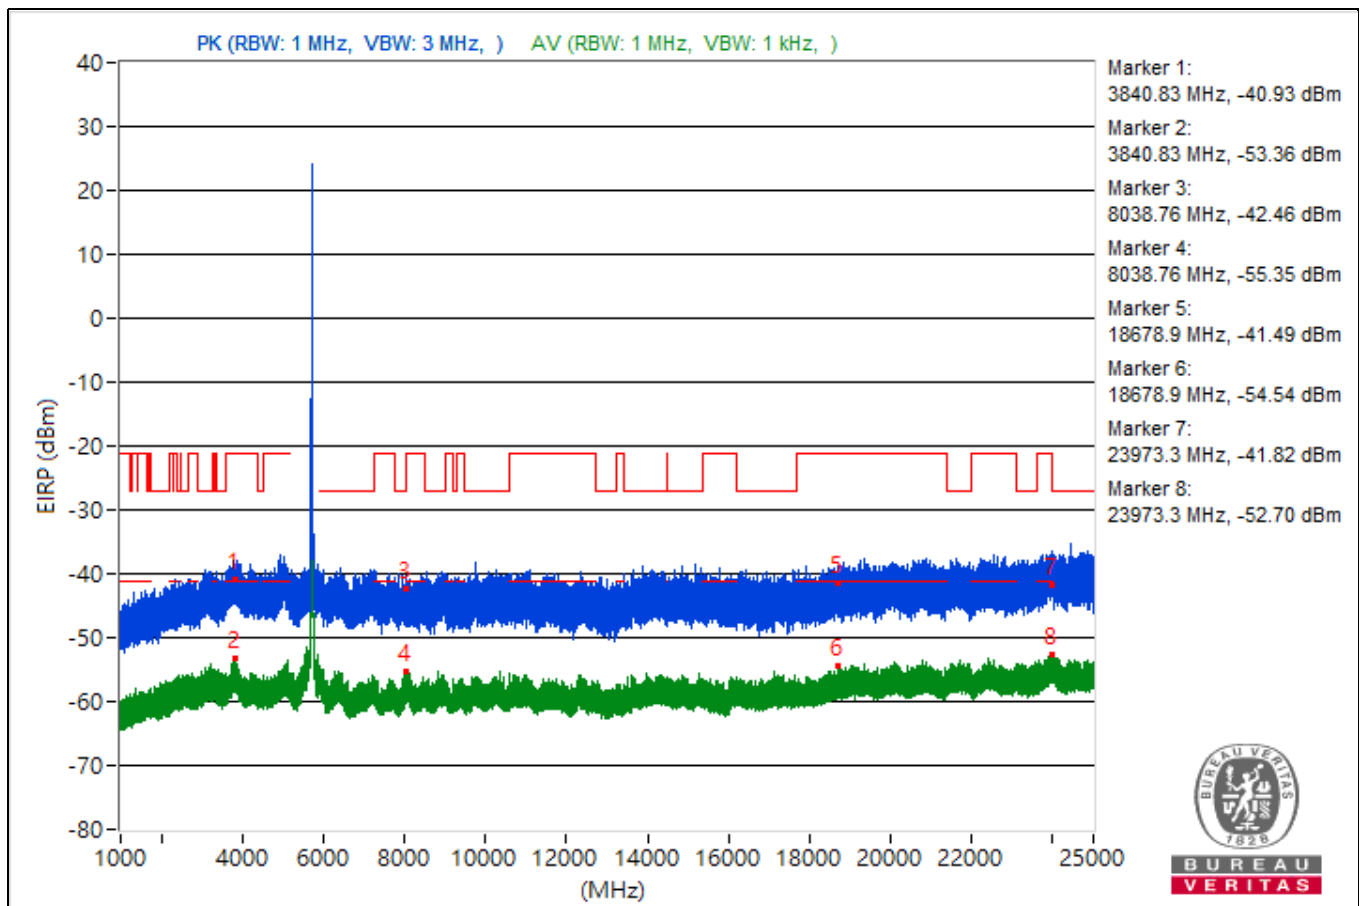


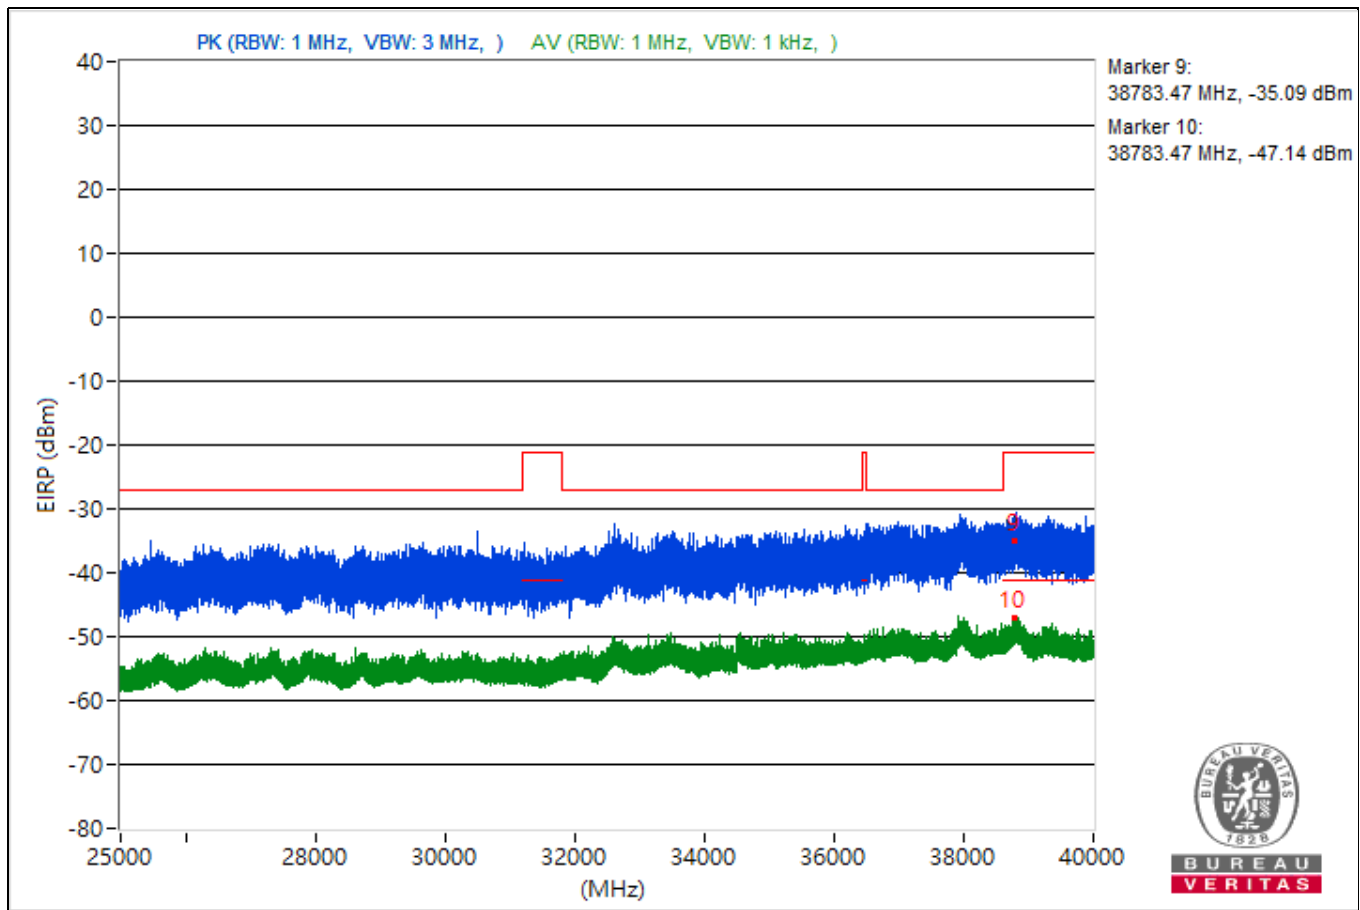


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3773.4	54.32 PK	74	-19.68	-45.86	4.92	-40.94
2	3773.4	41.41 AV	54	-12.59	-58.77	4.92	-53.85
3	8051.73	51.04 PK	74	-22.96	-49.14	4.92	-44.22
4	8051.73	41.09 AV	54	-12.91	-59.09	4.92	-54.17
5	18906.6	50.64 PK	74	-23.36	-49.54	4.92	-44.62
6	18906.6	40.77 AV	54	-13.23	-59.41	4.92	-54.49
7	23930.6	54.6 PK	74	-19.4	-45.58	4.92	-40.66
8	23930.6	42.76 AV	54	-11.24	-57.42	4.92	-52.5
9	38811.91	61.09 PK	74	-12.91	-39.09	4.92	-34.17
10	38811.91	48.49 AV	54	-5.51	-51.69	4.92	-46.77

Note: Margin value = Emission Level - Limit value

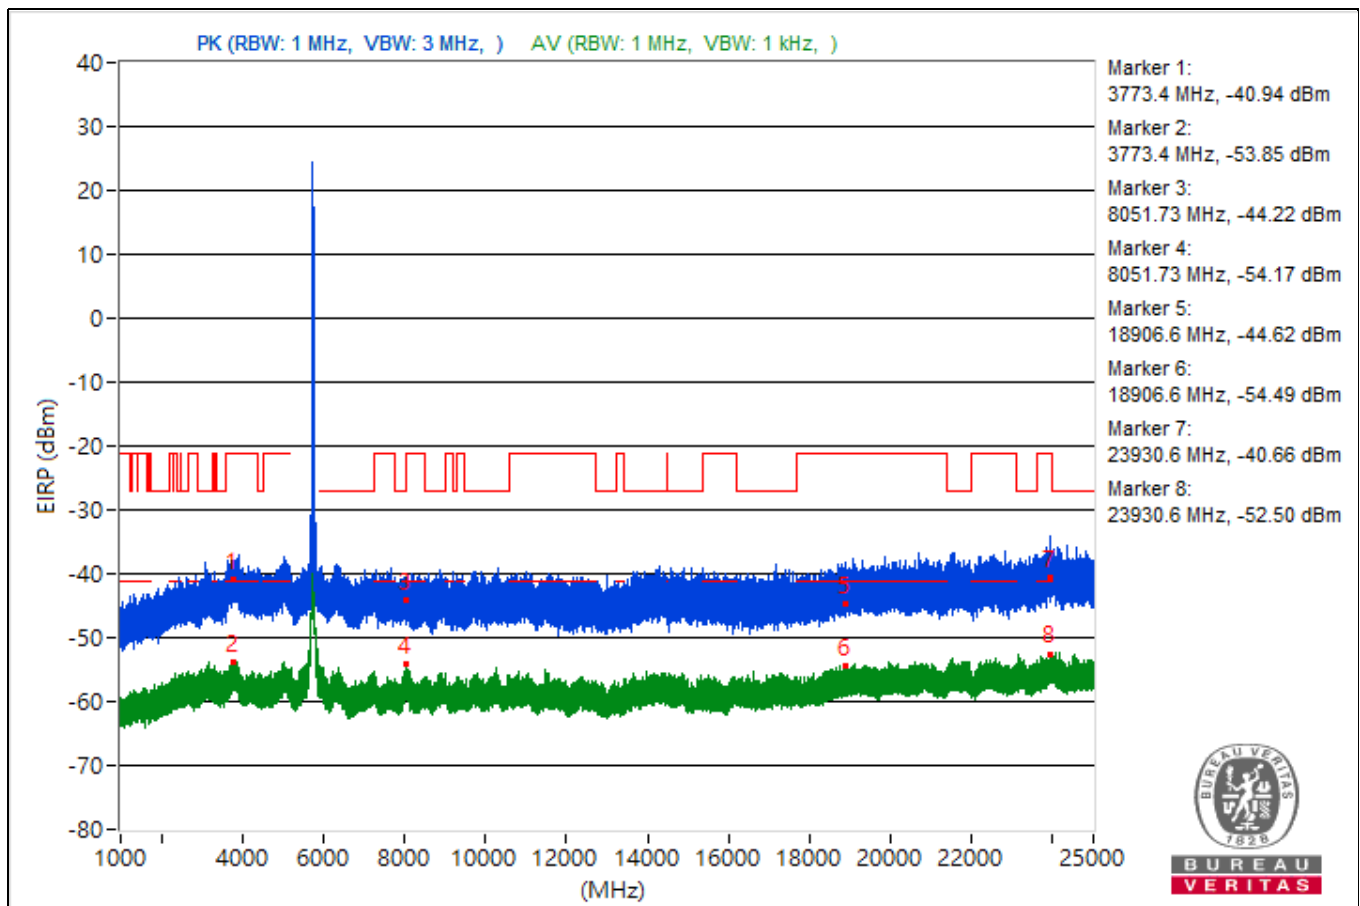


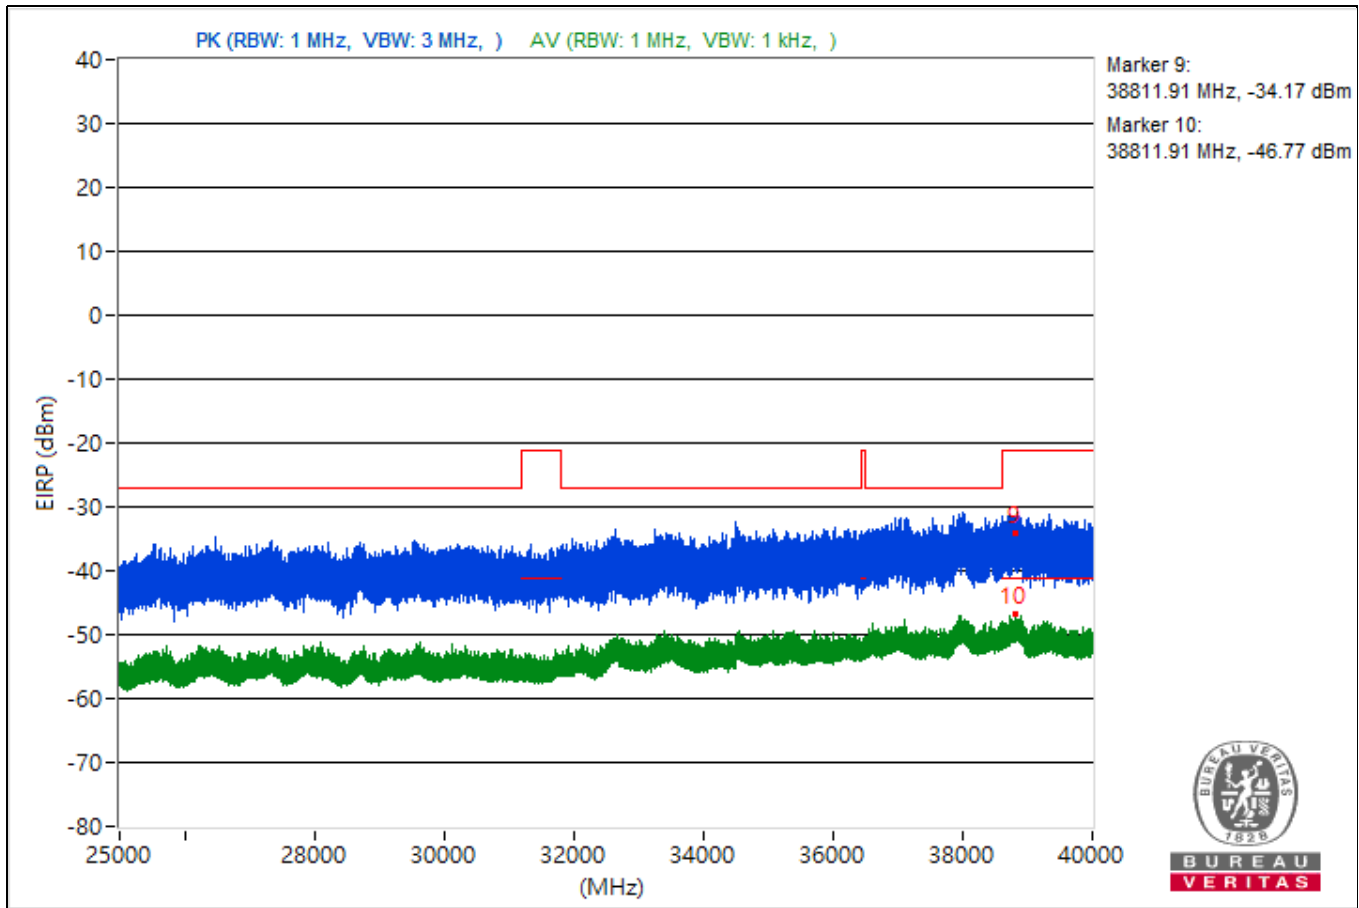


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3843.32	53.46 PK	74	-20.54	-46.72	4.92	-41.8
2	3843.32	41.76 AV	54	-12.24	-58.42	4.92	-53.5
3	8039.82	49.71 PK	74	-24.29	-50.47	4.92	-45.55
4	8039.82	40.01 AV	54	-13.99	-60.17	4.92	-55.25
5	18989.2	52.75 PK	74	-21.25	-47.43	4.92	-42.51
6	18989.2	40.91 AV	54	-13.09	-59.27	4.92	-54.35
7	23959.5	54.57 PK	74	-19.43	-45.61	4.92	-40.69
8	23959.5	43.23 AV	54	-10.77	-56.95	4.92	-52.03
9	38871.02	60.31 PK	74	-13.69	-39.87	4.92	-34.95
10	38871.02	48.34 AV	54	-5.66	-51.84	4.92	-46.92

Note: Margin value = Emission Level - Limit value

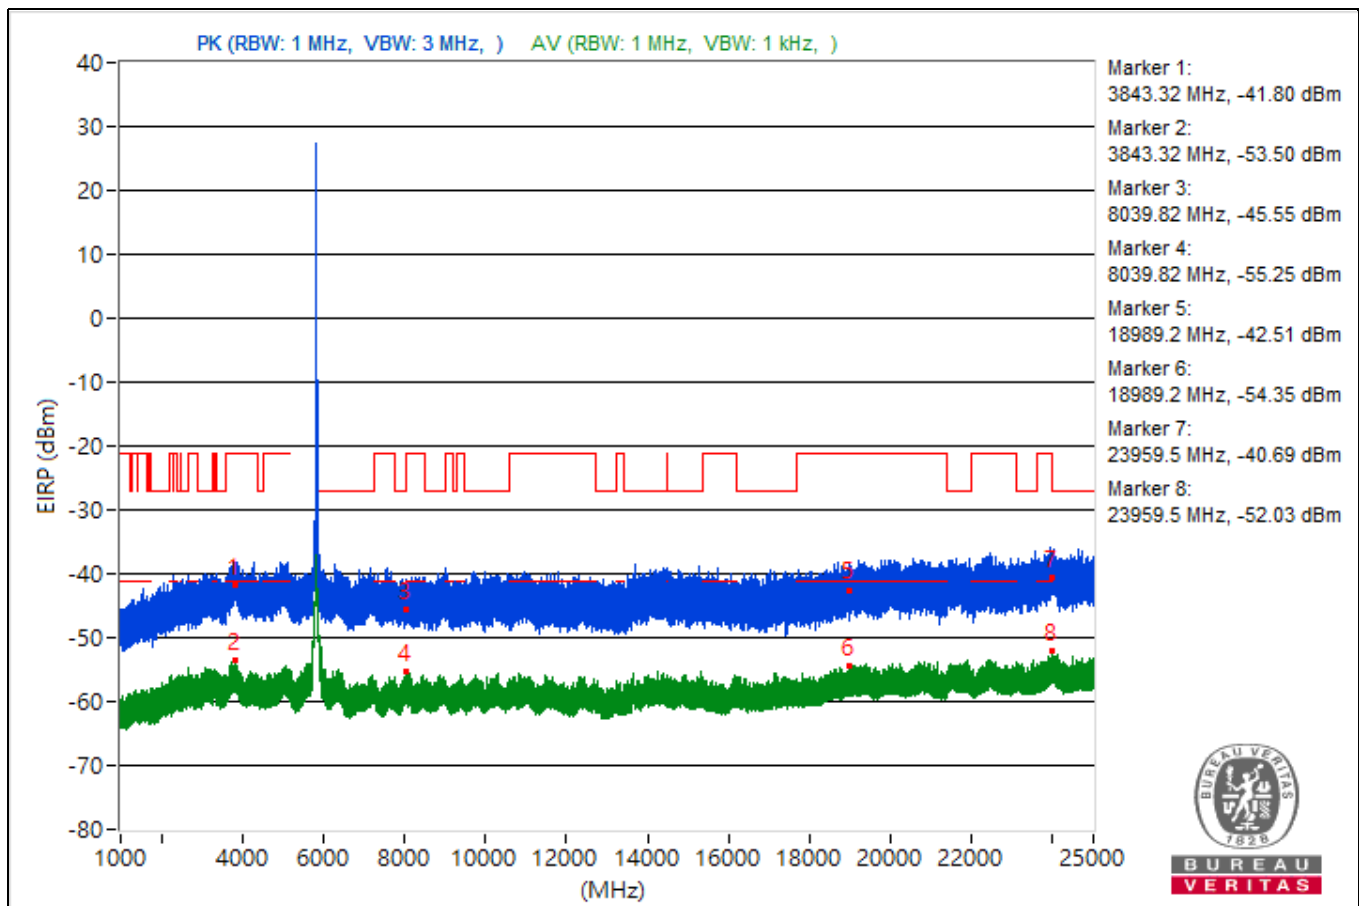


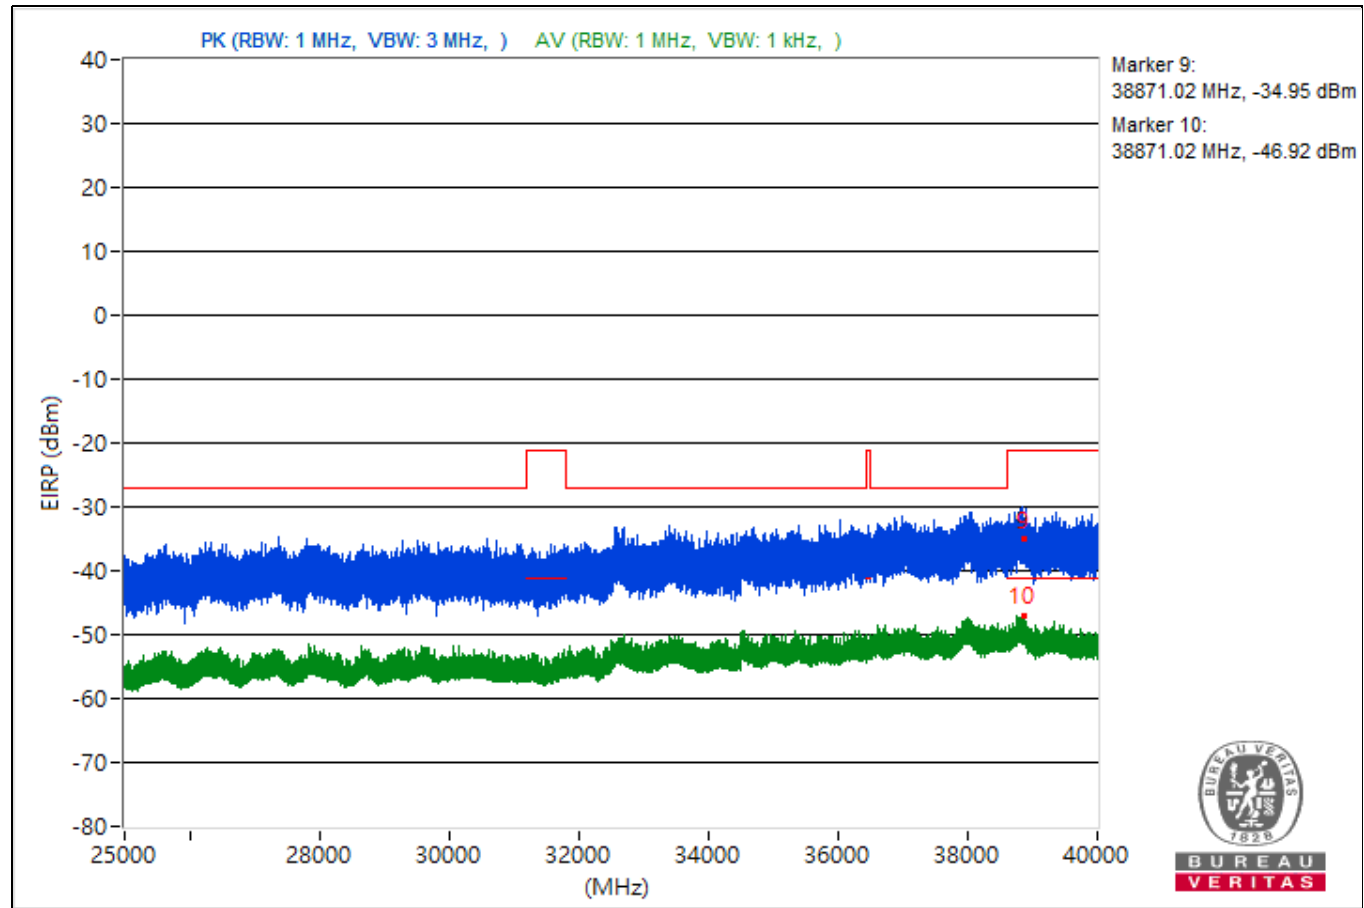


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.96	54.76 PK	74	-19.24	-45.42	4.92	-40.5
2	5097.96	44.7 AV	54	-9.3	-55.48	4.92	-50.56
3	11094.58	50.28 PK	74	-23.72	-49.9	4.92	-44.98
4	11094.58	40.29 AV	54	-13.71	-59.89	4.92	-54.97
5	18938.8	50.79 PK	74	-23.21	-49.39	4.92	-44.47
6	18938.8	40.69 AV	54	-13.31	-59.49	4.92	-54.57
7	23945.3	54.32 PK	74	-19.68	-45.86	4.92	-40.94
8	23945.3	42.57 AV	54	-11.43	-57.61	4.92	-52.69
9	38789.69	59.15 PK	74	-14.85	-41.03	4.92	-36.11
10	38789.69	48.6 AV	54	-5.4	-51.58	4.92	-46.66

Note: Margin value = Emission Level - Limit value

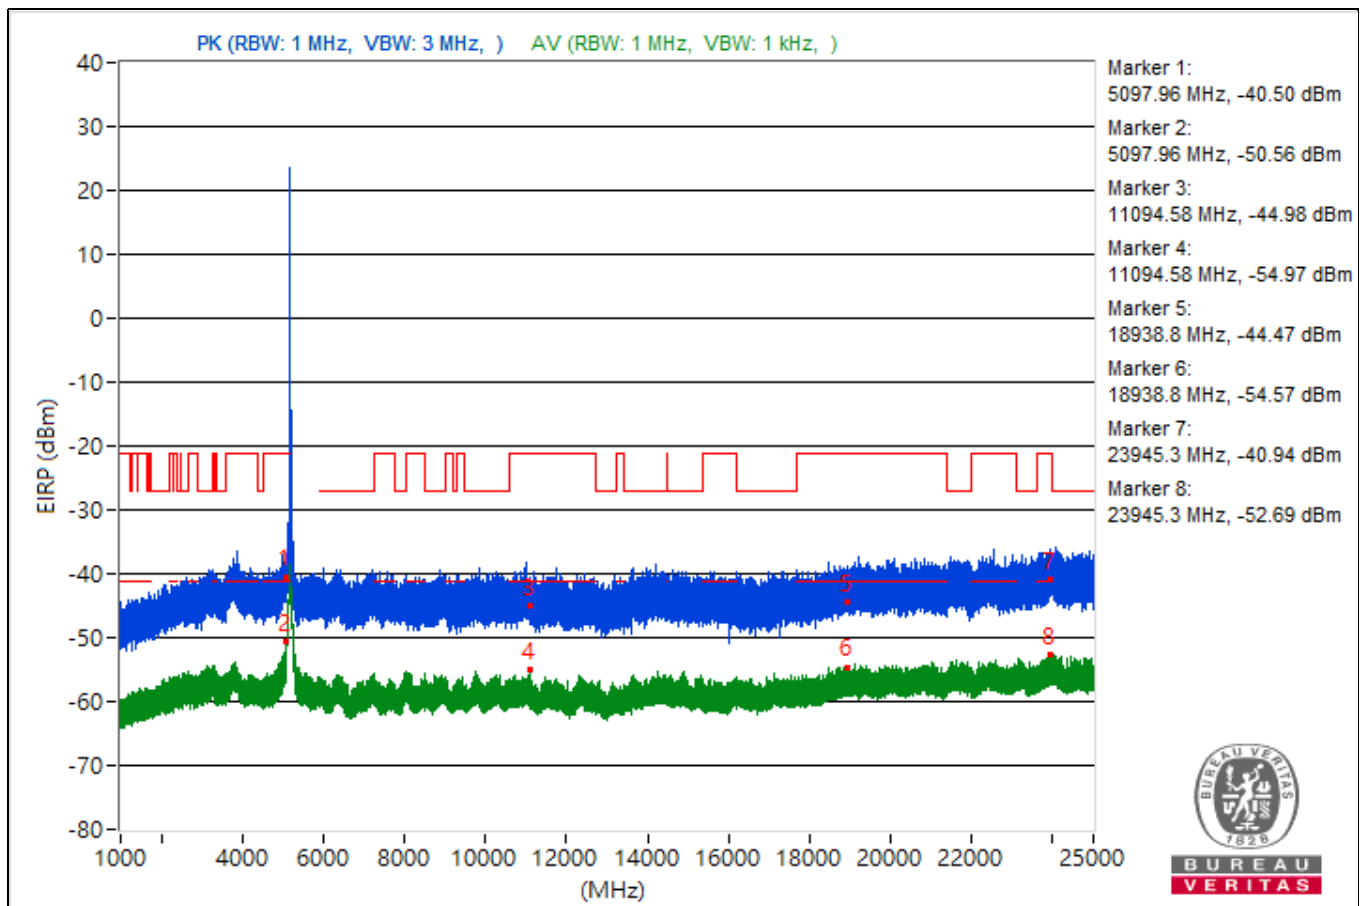


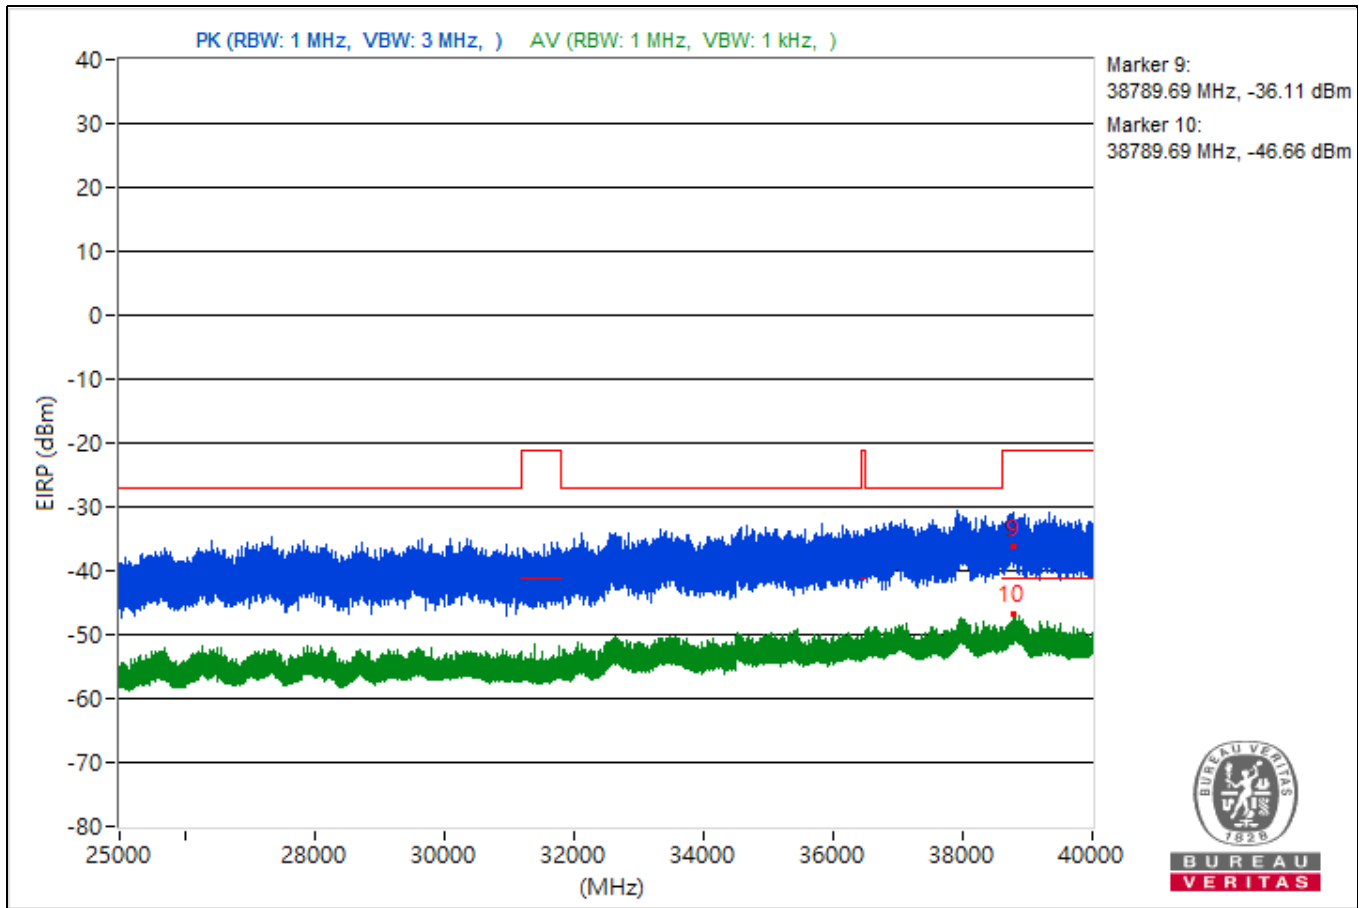


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5017.84	53.06 PK	74	-20.94	-47.12	4.92	-42.2
2	5017.84	42.7 AV	54	-11.3	-57.48	4.92	-52.56
3	8090.76	50.29 PK	74	-23.71	-49.89	4.92	-44.97
4	8090.76	40.14 AV	54	-13.86	-60.04	4.92	-55.12
5	18597.6	52.83 PK	74	-21.17	-47.35	4.92	-42.43
6	18597.6	40.83 AV	54	-13.17	-59.35	4.92	-54.43
7	23971.5	55.84 PK	74	-18.16	-44.34	4.92	-39.42
8	23971.5	43.25 AV	54	-10.75	-56.93	4.92	-52.01
9	38801.87	59.69 PK	74	-14.31	-40.49	4.92	-35.57
10	38801.87	48.28 AV	54	-5.72	-51.9	4.92	-46.98

Note: Margin value = Emission Level - Limit value

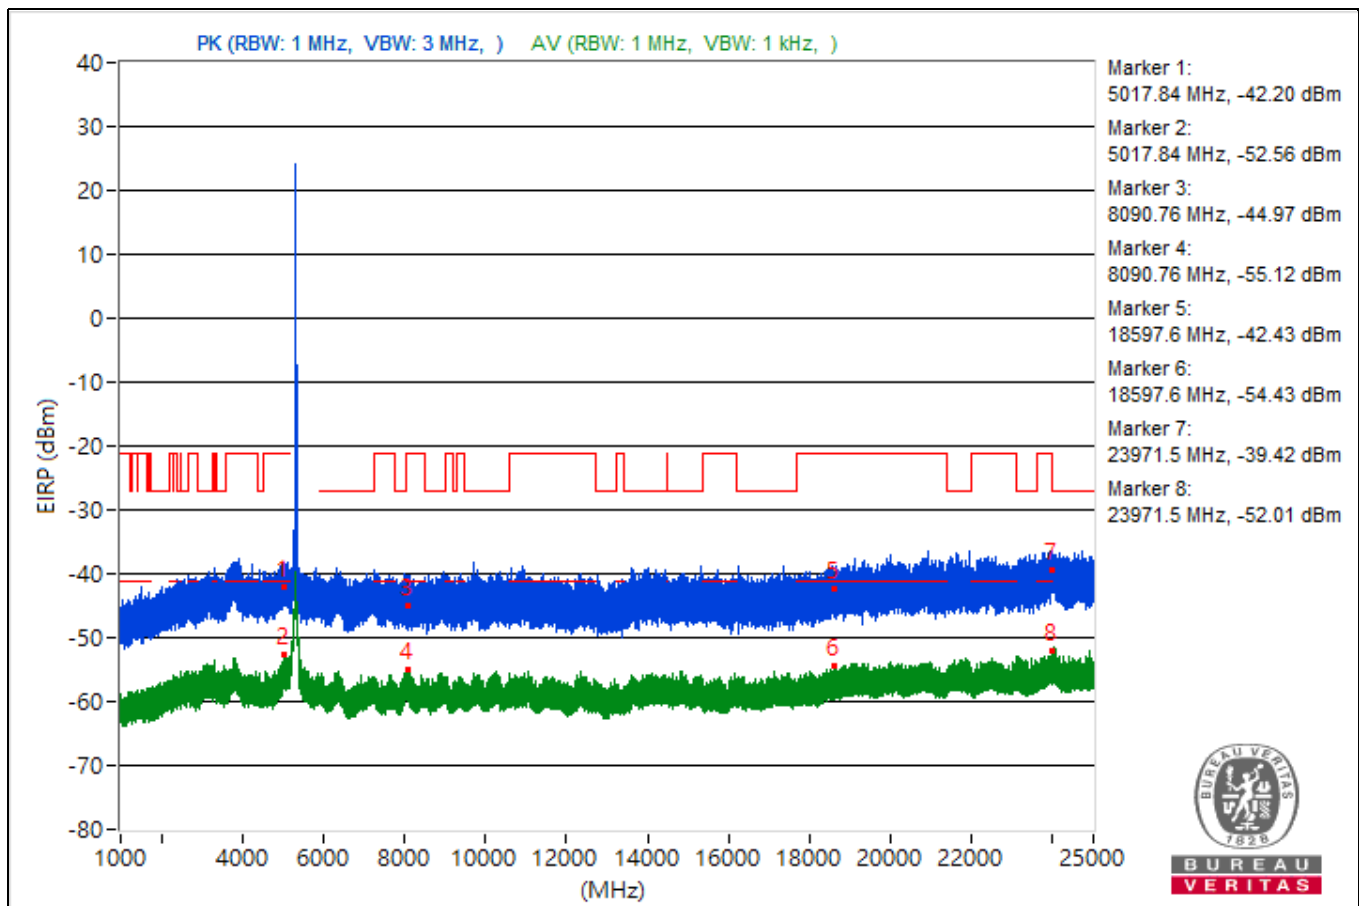


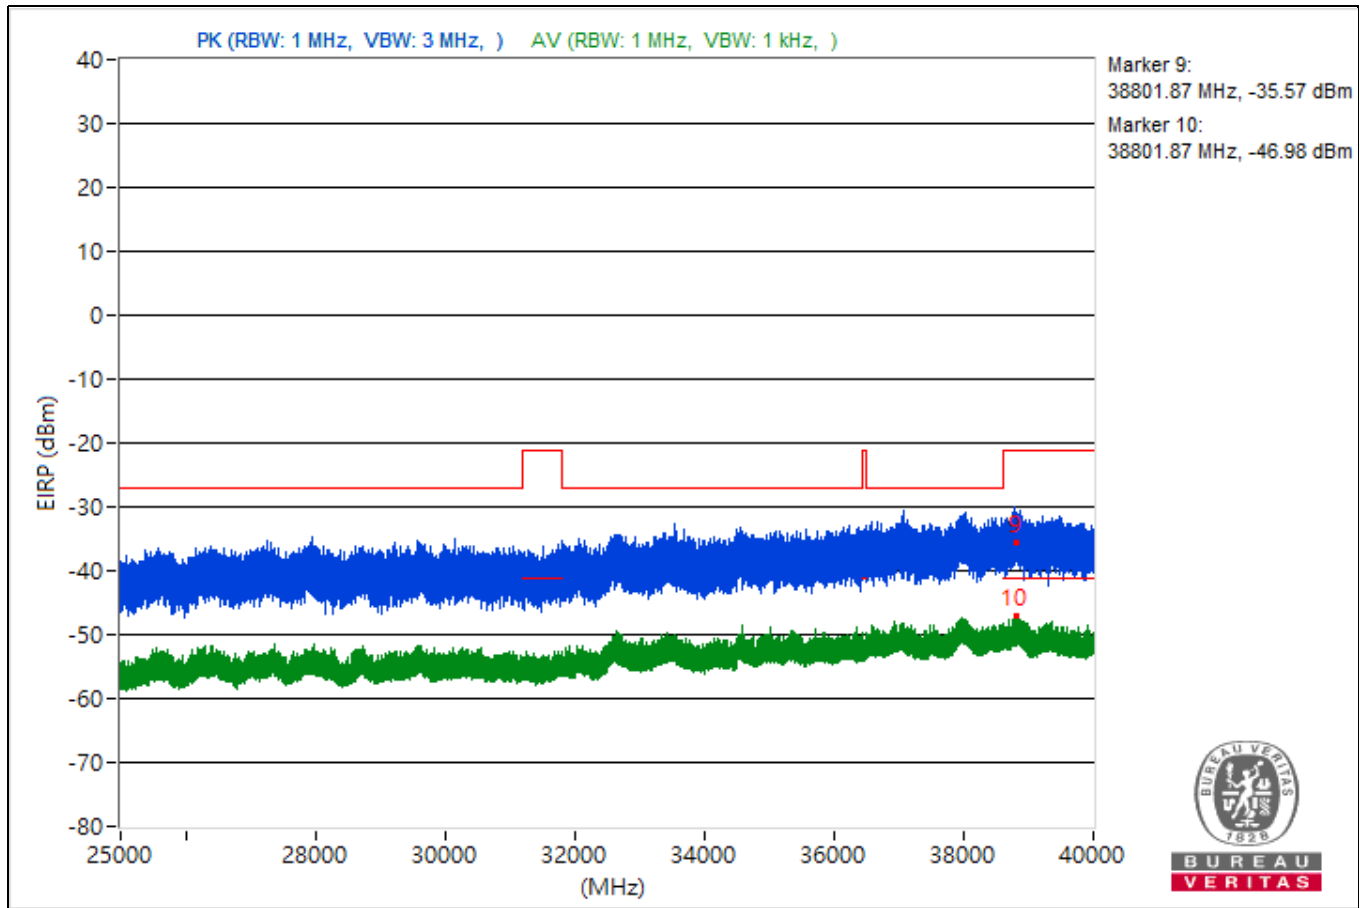


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.83	52.83 PK	74	-21.17	-47.35	4.92	-42.43
2	3777.83	41.56 AV	54	-12.44	-58.62	4.92	-53.7
3	8101.51	51.16 PK	74	-22.84	-49.02	4.92	-44.1
4	8101.51	40.19 AV	54	-13.81	-59.99	4.92	-55.07
5	18652.1	53.19 PK	74	-20.81	-46.99	4.92	-42.07
6	18652.1	40.89 AV	54	-13.11	-59.29	4.92	-54.37
7	23988.9	56.44 PK	74	-17.56	-43.74	4.92	-38.82
8	23988.9	43.18 AV	54	-10.82	-57	4.92	-52.08
9	38817.42	58.2 PK	74	-15.8	-41.98	4.92	-37.06
10	38817.42	48.83 AV	54	-5.17	-51.35	4.92	-46.43

Note: Margin value = Emission Level - Limit value

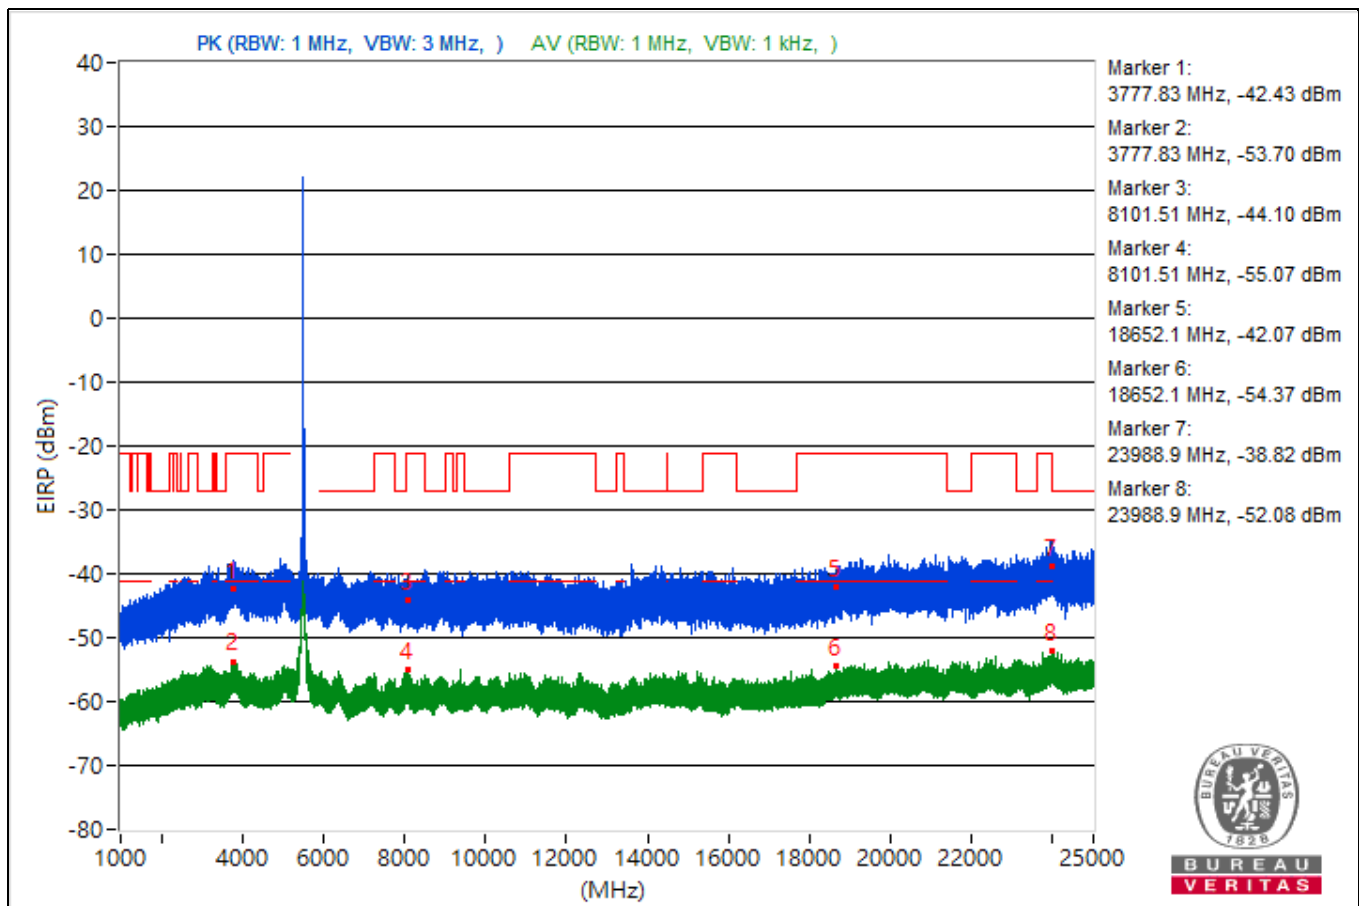


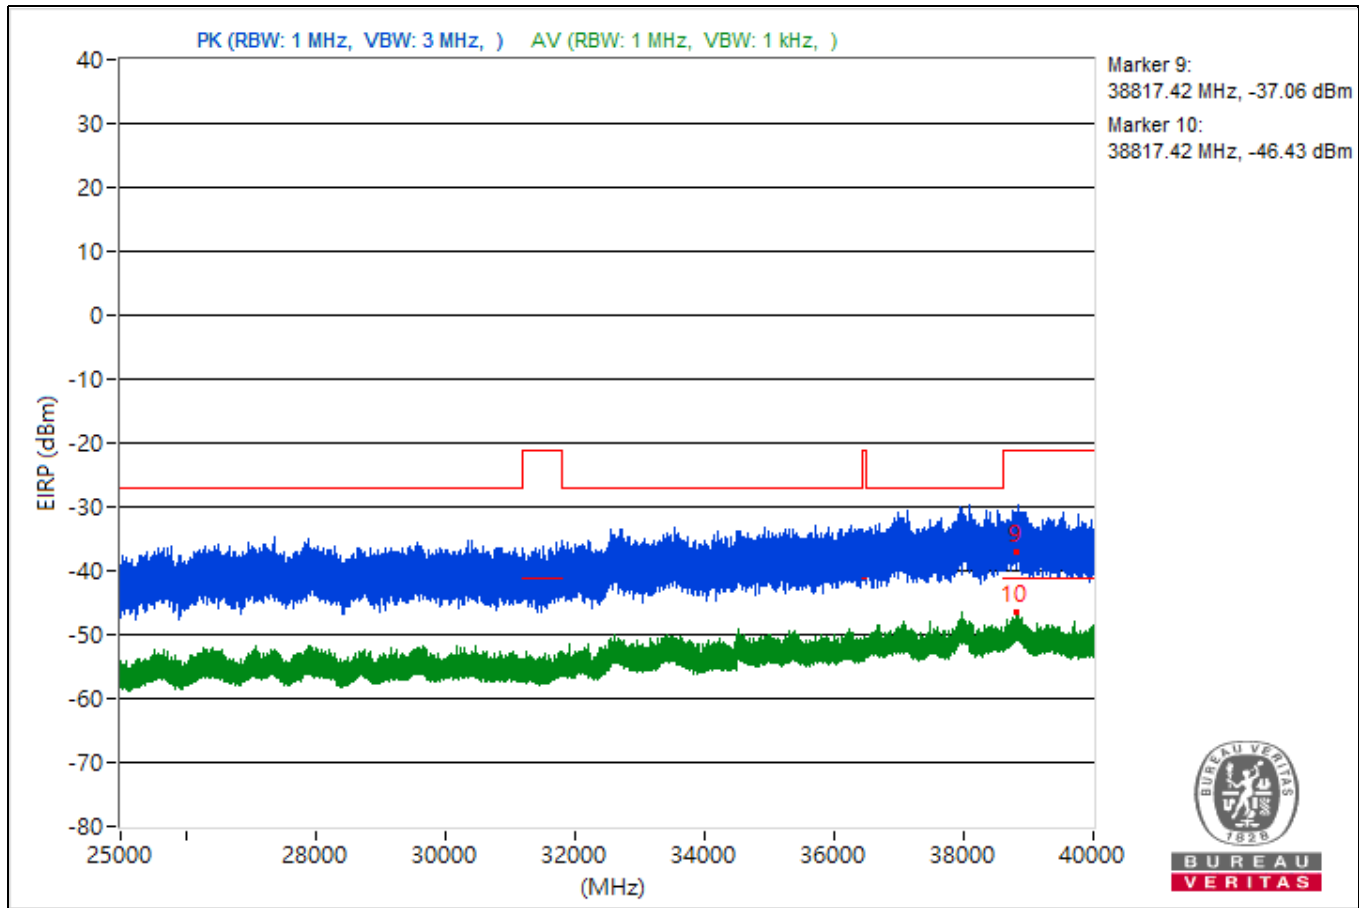


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3800.31	54.36 PK	74	-19.64	-45.82	4.92	-40.9
2	3800.31	41.72 AV	54	-12.28	-58.46	4.92	-53.54
3	8106.31	50.56 PK	74	-23.44	-49.62	4.92	-44.7
4	8106.31	40.78 AV	54	-13.22	-59.4	4.92	-54.48
5	18805.1	52 PK	74	-22	-48.18	4.92	-43.26
6	18805.1	41.07 AV	54	-12.93	-59.11	4.92	-54.19
7	23977.1	55.41 PK	74	-18.59	-44.77	4.92	-39.85
8	23977.1	43.29 AV	54	-10.71	-56.89	4.92	-51.97
9	38763.91	62.16 PK	74	-11.84	-38.02	4.92	-33.1
10	38763.91	48.55 AV	54	-5.45	-51.63	4.92	-46.71

Note: Margin value = Emission Level - Limit value

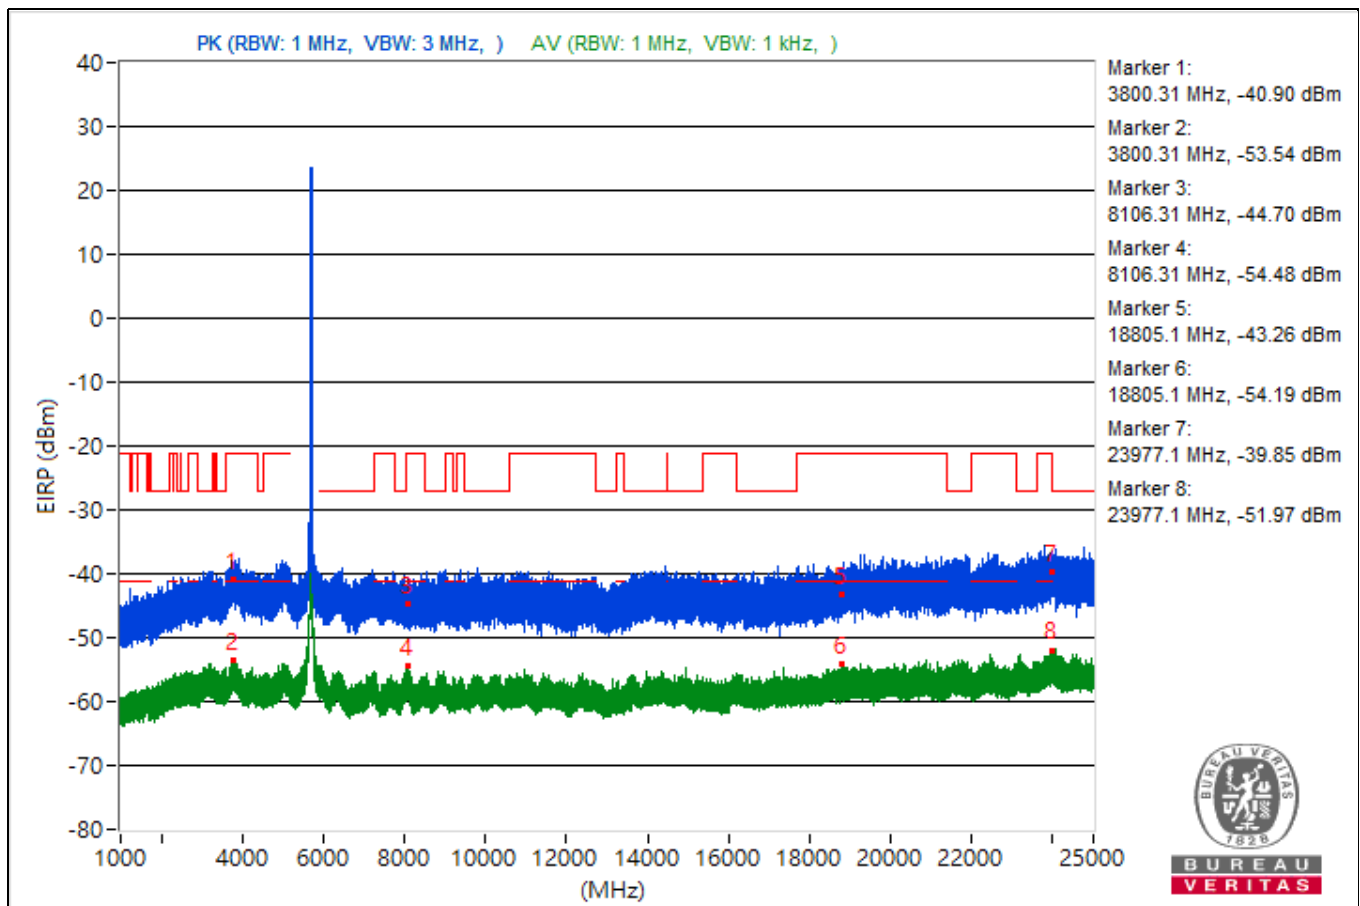


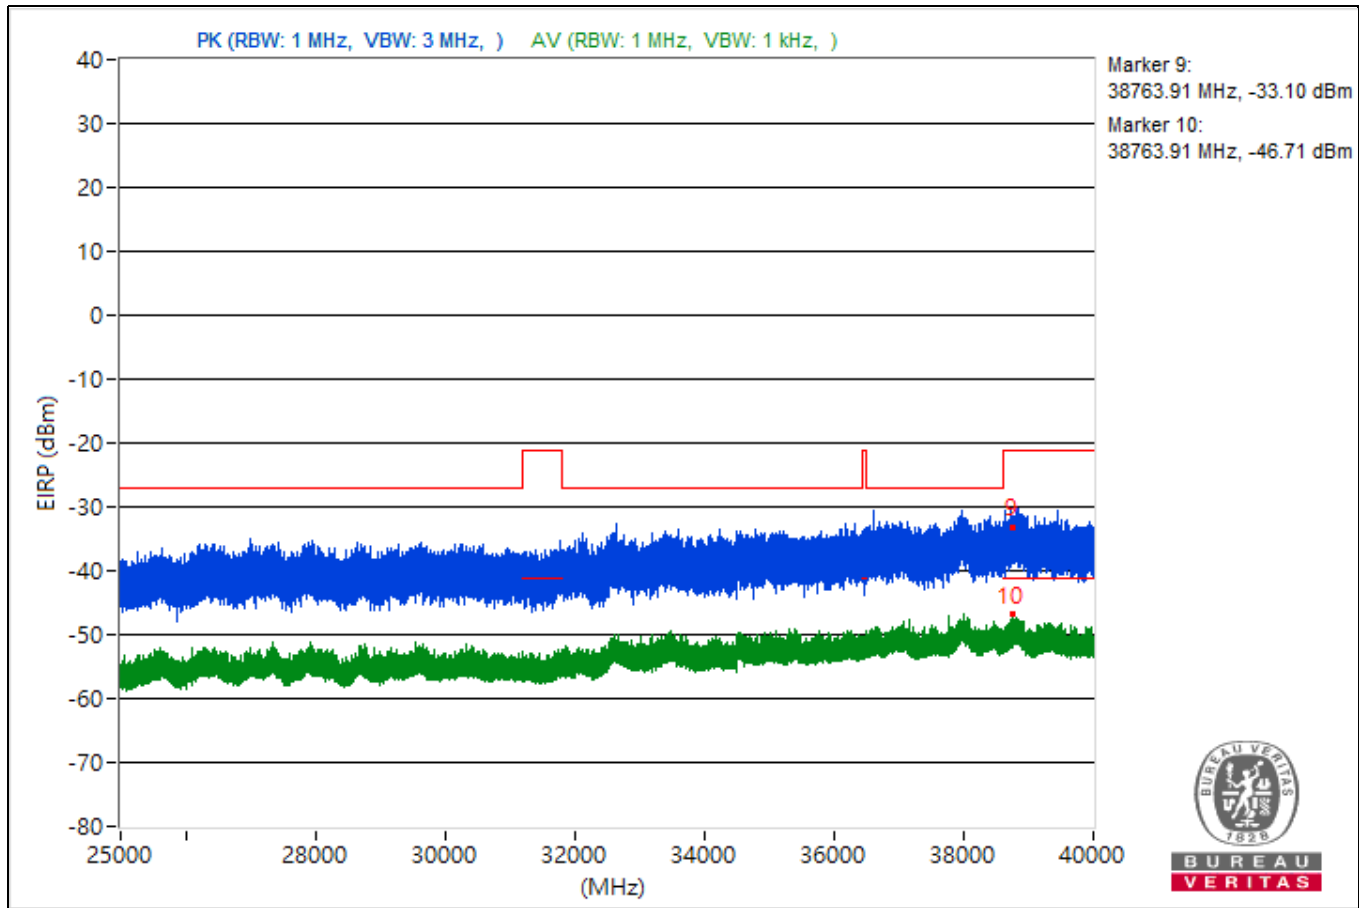


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3793.54	53.18 PK	74	-20.82	-47	4.92	-42.08
2	3793.54	42.19 AV	54	-11.81	-57.99	4.92	-53.07
3	8084.71	52 PK	74	-22	-48.18	4.92	-43.26
4	8084.71	40.18 AV	54	-13.82	-60	4.92	-55.08
5	18827.1	52.22 PK	74	-21.78	-47.96	4.92	-43.04
6	18827.1	41.1 AV	54	-12.9	-59.08	4.92	-54.16
7	23847.4	56.78 PK	74	-17.22	-43.4	4.92	-38.48
8	23847.4	43.08 AV	54	-10.92	-57.1	4.92	-52.18
9	38878.58	58.78 PK	74	-15.22	-41.4	4.92	-36.48
10	38878.58	48.39 AV	54	-5.61	-51.79	4.92	-46.87

Note: Margin value = Emission Level - Limit value

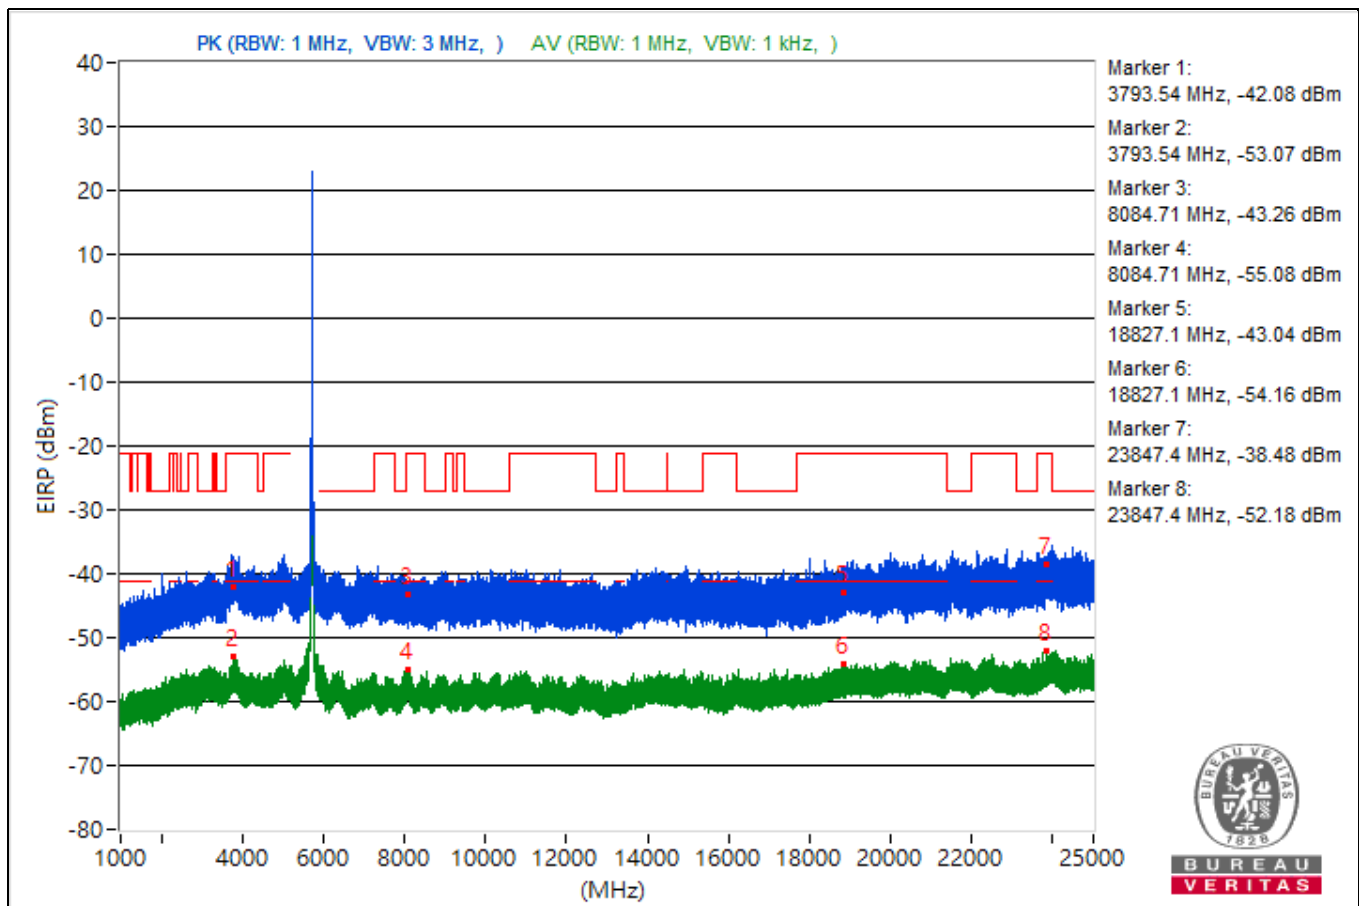


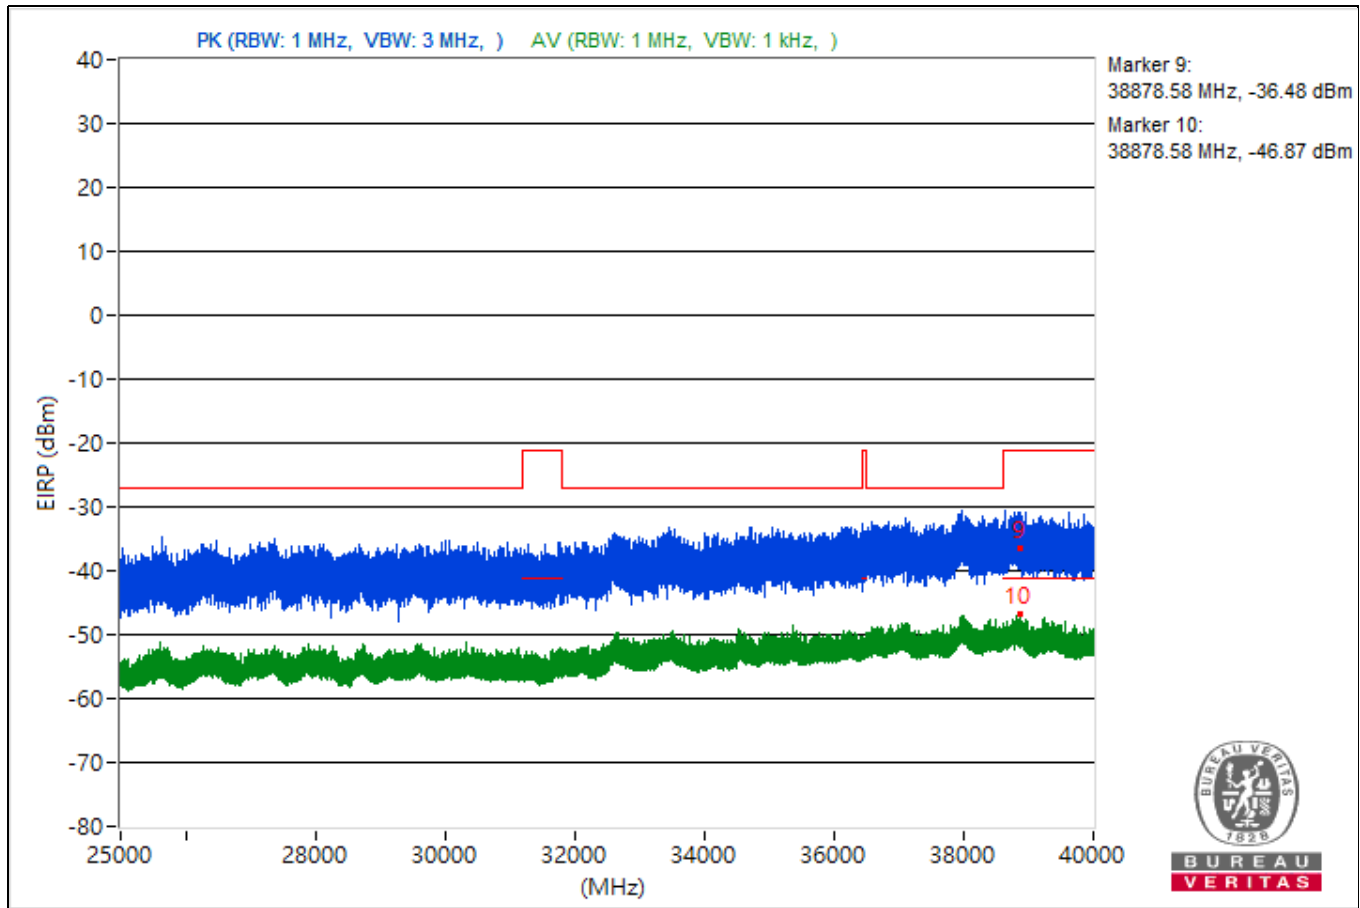


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5089.32	55.15 PK	74	-18.85	-45.03	4.92	-40.11
2	5089.32	41.76 AV	54	-12.24	-58.42	4.92	-53.5
3	8052.8	50.71 PK	74	-23.29	-49.47	4.92	-44.55
4	8052.8	40.24 AV	54	-13.76	-59.94	4.92	-55.02
5	18995.9	53.56 PK	74	-20.44	-46.62	4.92	-41.7
6	18995.9	41.07 AV	54	-12.93	-59.11	4.92	-54.19
7	23968.5	53.18 PK	74	-20.82	-47	4.92	-42.08
8	23968.5	43.41 AV	54	-10.59	-56.77	4.92	-51.85
9	38819.38	58.97 PK	74	-15.03	-41.21	4.92	-36.29
10	38819.38	48.35 AV	54	-5.65	-51.83	4.92	-46.91

Note: Margin value = Emission Level - Limit value

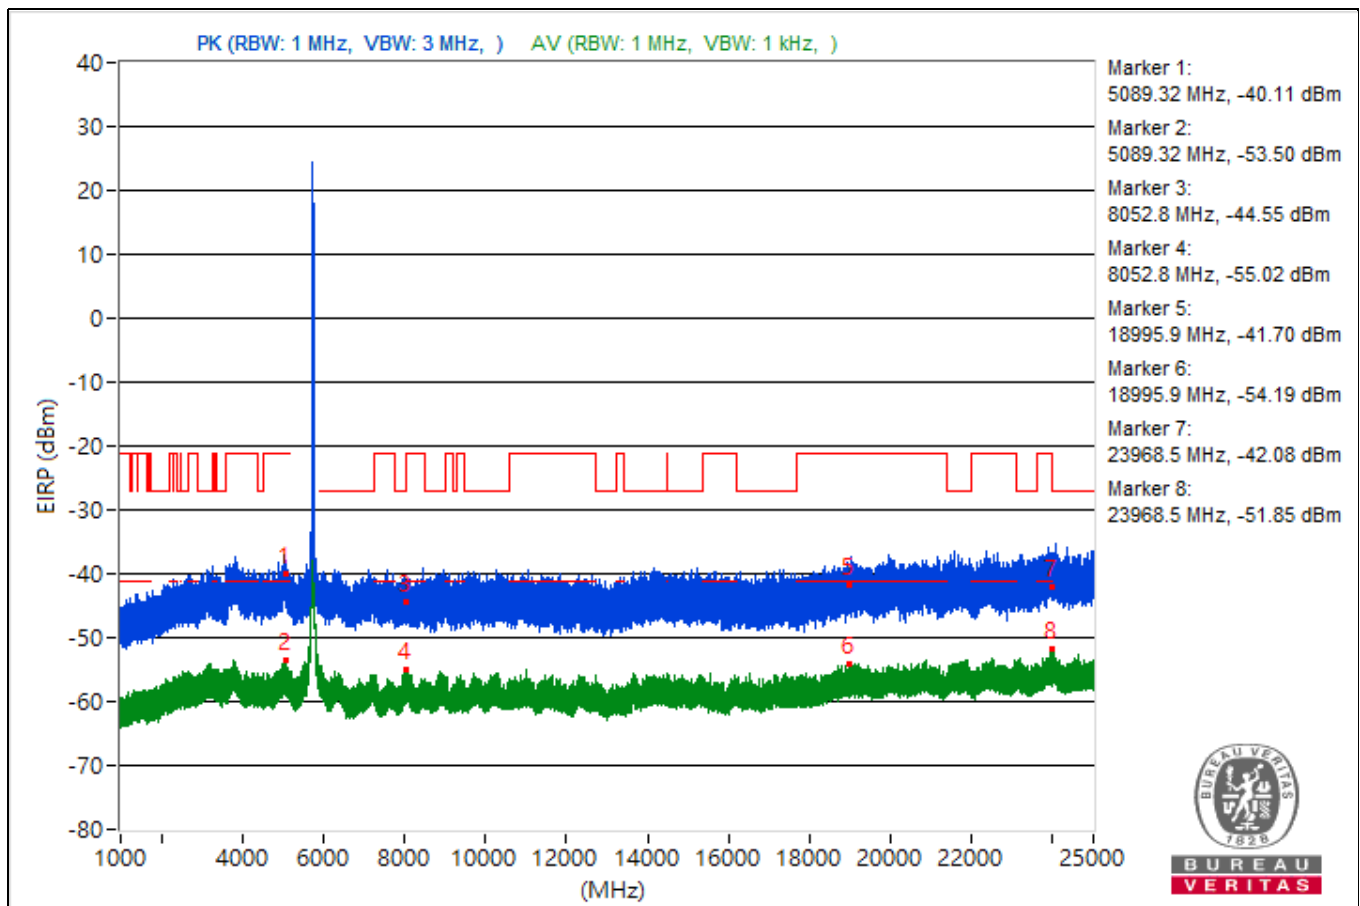


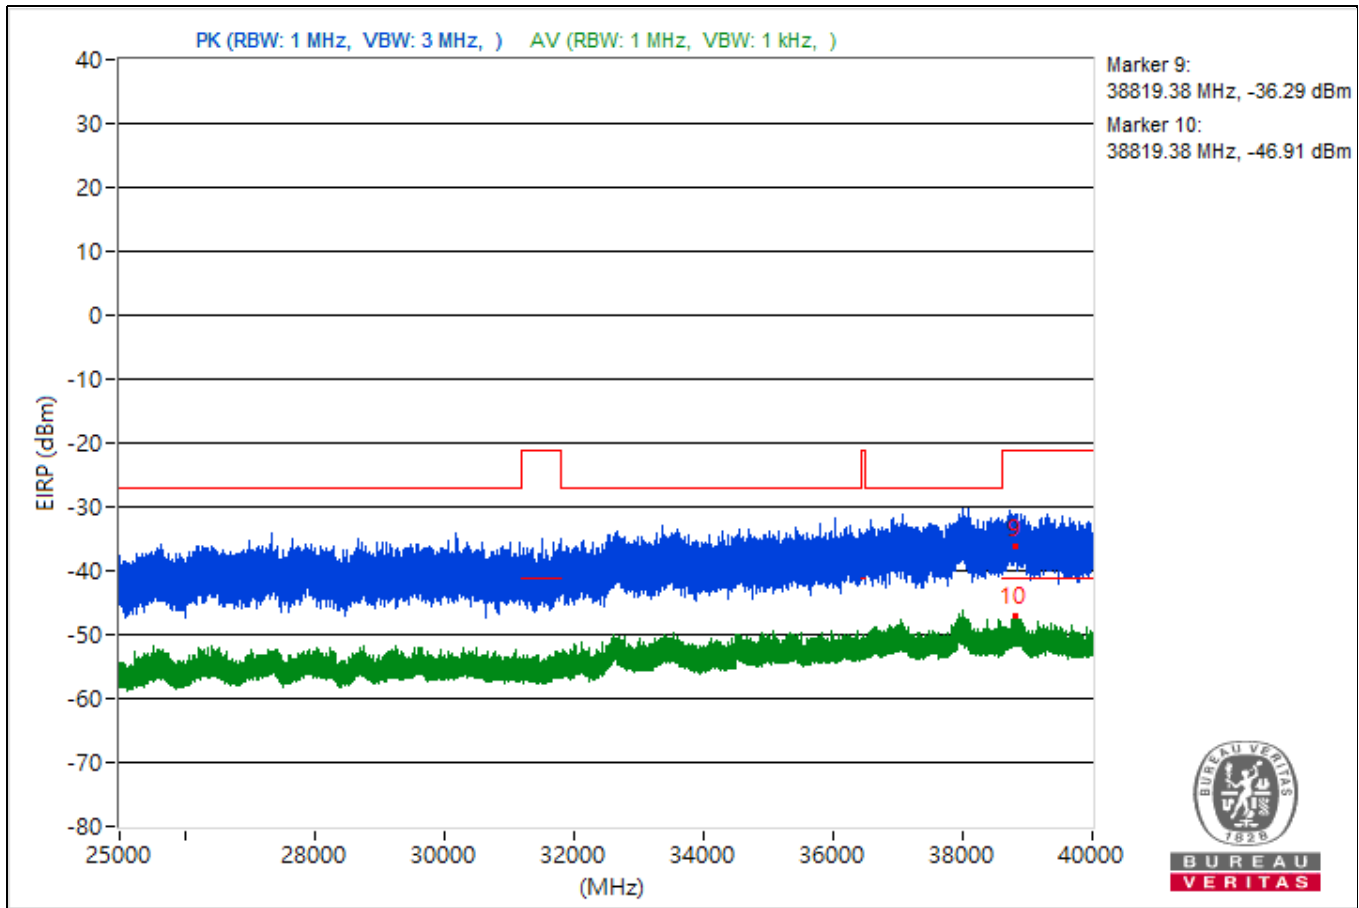


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3793.93	53.82 PK	74	-20.18	-46.36	4.92	-41.44
2	3793.93	42.12 AV	54	-11.88	-58.06	4.92	-53.14
3	8071.38	50.31 PK	74	-23.69	-49.87	4.92	-44.95
4	8071.38	40.48 AV	54	-13.52	-59.7	4.92	-54.78
5	18938.5	52.83 PK	74	-21.17	-47.35	4.92	-42.43
6	18938.5	41.35 AV	54	-12.65	-58.83	4.92	-53.91
7	23977.9	56.31 PK	74	-17.69	-43.87	4.92	-38.95
8	23977.9	43.97 AV	54	-10.03	-56.21	4.92	-51.29
9	38825.42	57.29 PK	74	-16.71	-42.89	4.92	-37.97
10	38825.42	48.85 AV	54	-5.15	-51.33	4.92	-46.41

Note: Margin value = Emission Level - Limit value

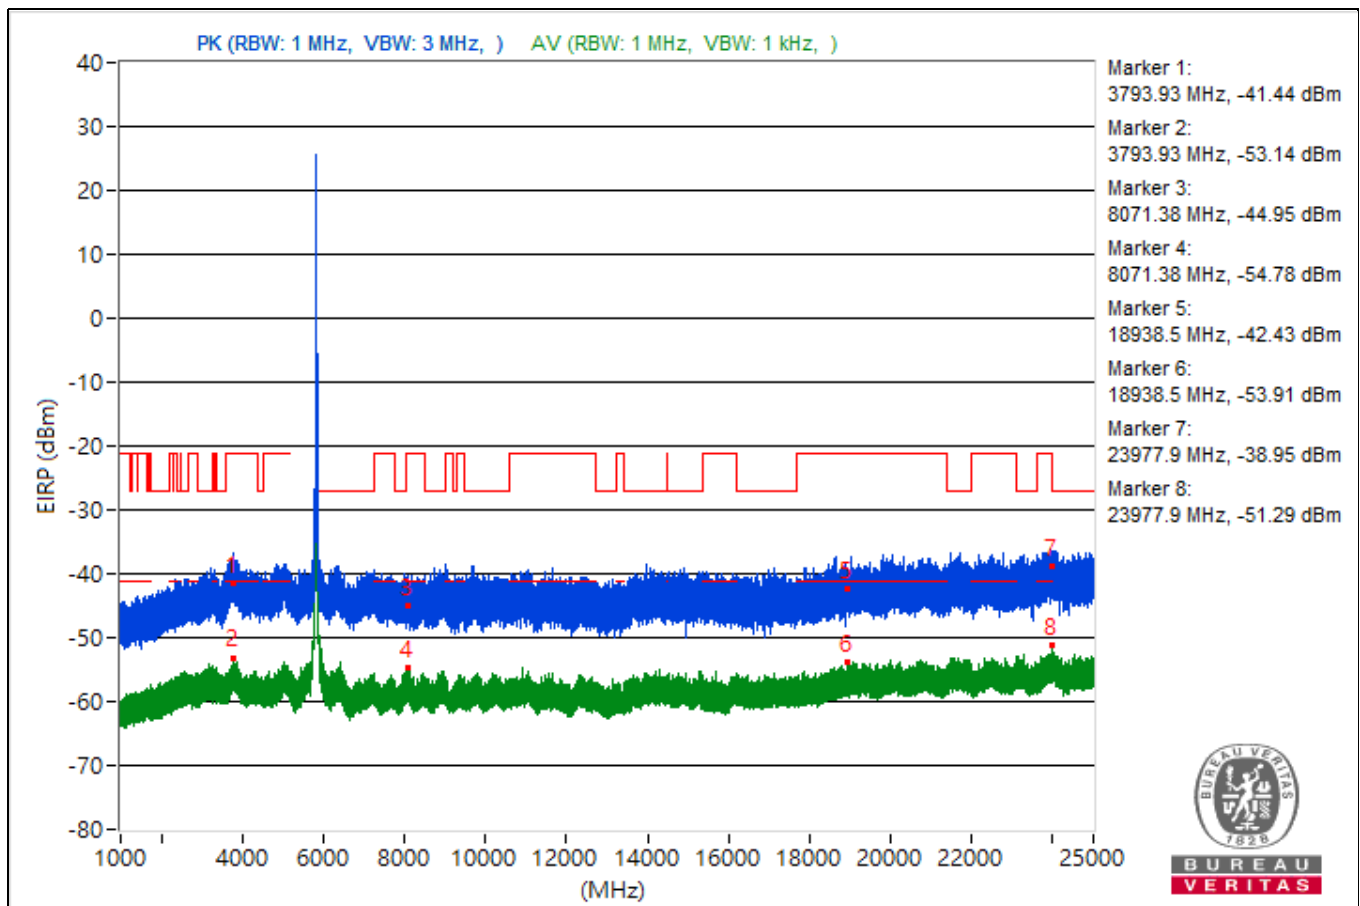


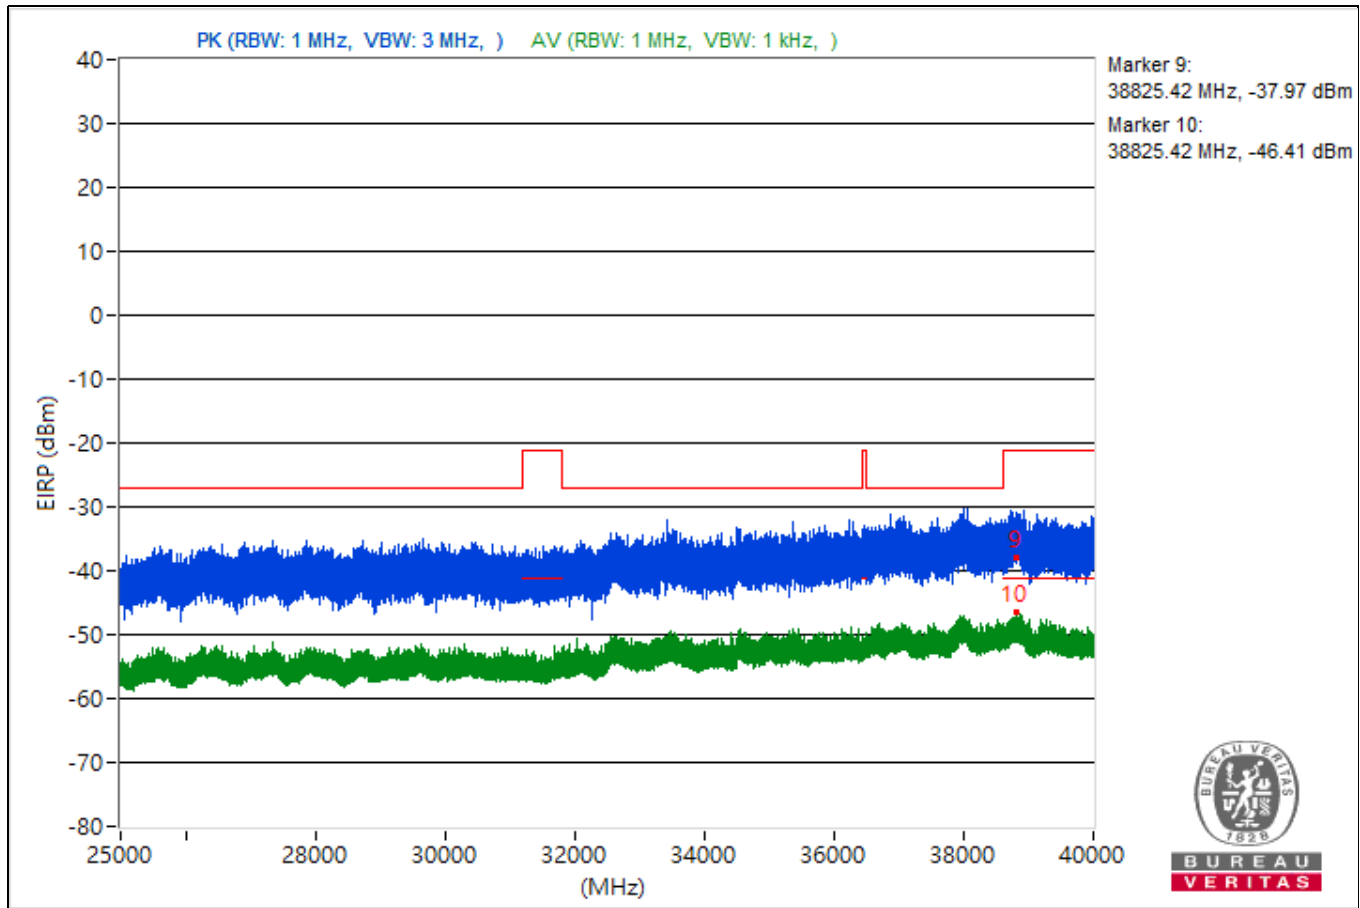


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.43	63.8 PK	74	-10.2	-36.38	4.92	-31.46
2	5099.43	50.63 AV	54	-3.37	-49.55	4.92	-44.63
3	8118.04	49.71 PK	74	-24.29	-50.47	4.92	-45.55
4	8118.04	40.28 AV	54	-13.72	-59.9	4.92	-54.98
5	18958	53.99 PK	74	-20.01	-46.19	4.92	-41.27
6	18958	41.11 AV	54	-12.89	-59.07	4.92	-54.15
7	23959.2	56.39 PK	74	-17.61	-43.79	4.92	-38.87
8	23959.2	43.71 AV	54	-10.29	-56.47	4.92	-51.55
9	38774.31	58.17 PK	74	-15.83	-42.01	4.92	-37.09
10	38774.31	48.1 AV	54	-5.9	-52.08	4.92	-47.16

Note: Margin value = Emission Level - Limit value

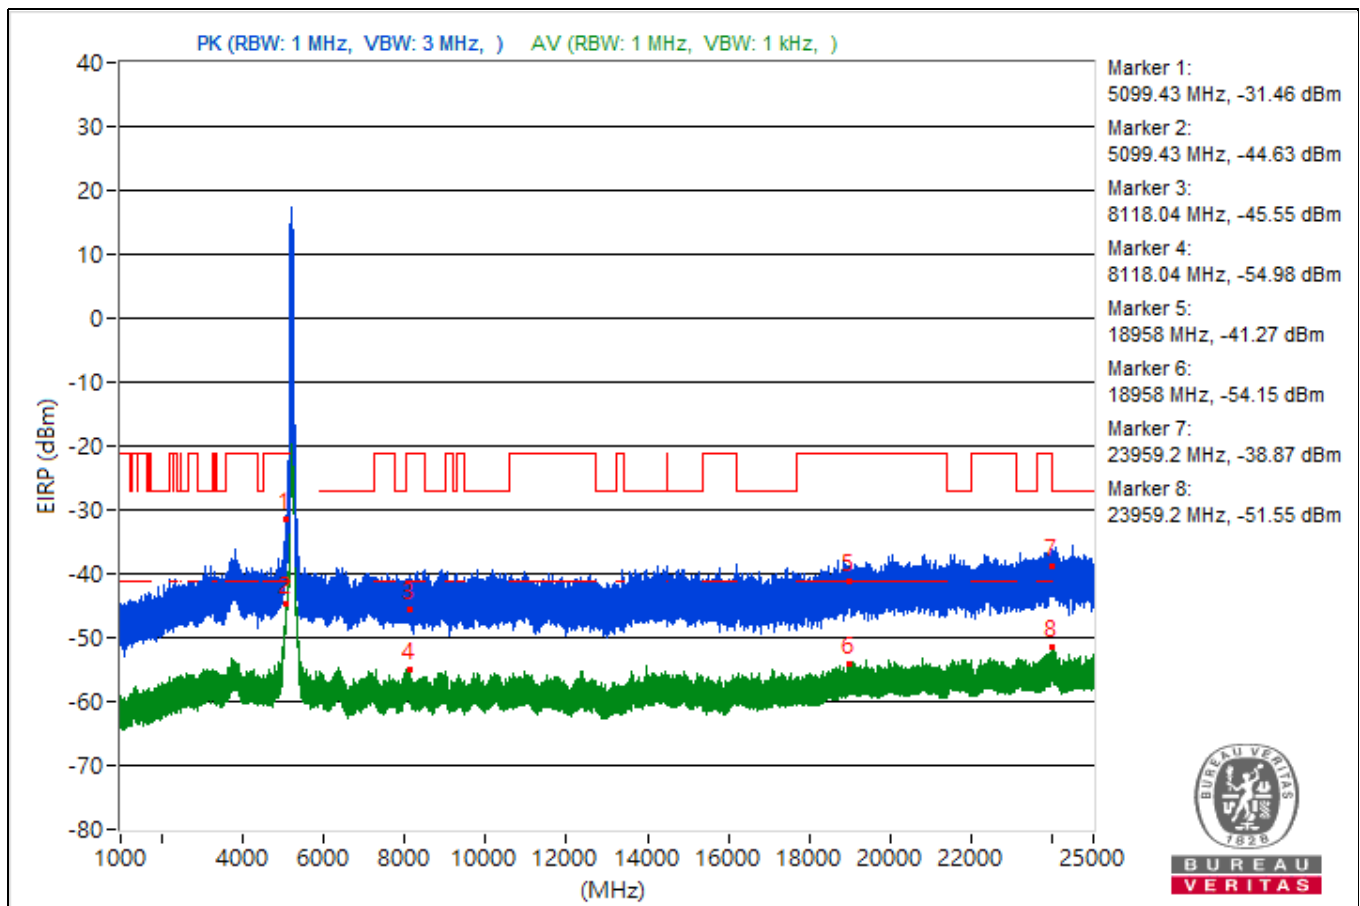


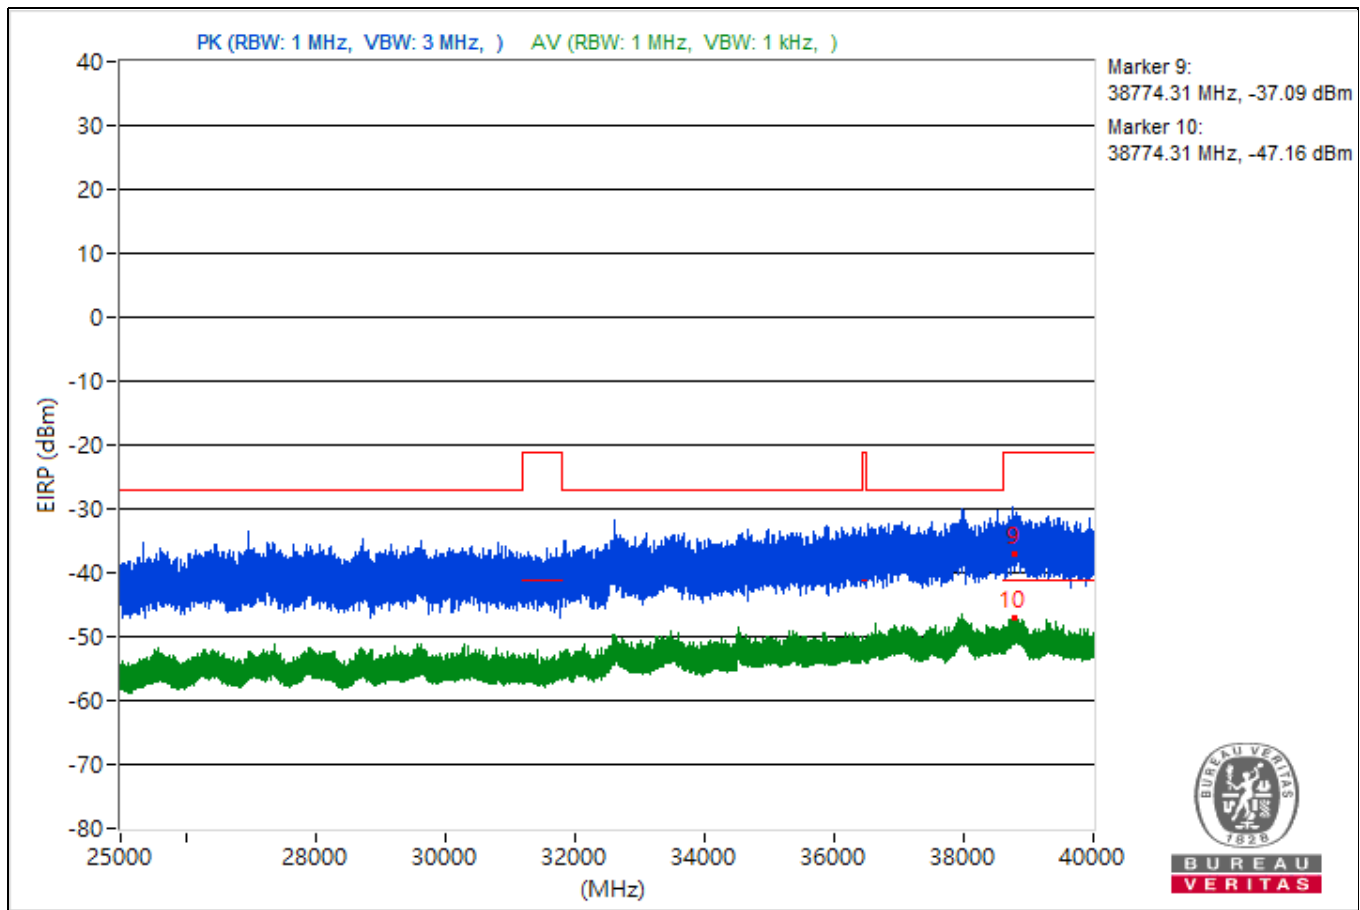


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.09	54.43 PK	74	-19.57	-45.75	4.92	-40.83
2	5096.09	42.75 AV	54	-11.25	-57.43	4.92	-52.51
3	8028.18	49.7 PK	74	-24.3	-50.48	4.92	-45.56
4	8028.18	40.2 AV	54	-13.8	-59.98	4.92	-55.06
5	18725.2	52.35 PK	74	-21.65	-47.83	4.92	-42.91
6	18725.2	40.85 AV	54	-13.15	-59.33	4.92	-54.41
7	23958.4	55.97 PK	74	-18.03	-44.21	4.92	-39.29
8	23958.4	43.98 AV	54	-10.02	-56.2	4.92	-51.28
9	38838.31	61.21 PK	74	-12.79	-38.97	4.92	-34.05
10	38838.31	48.94 AV	54	-5.06	-51.24	4.92	-46.32

Note: Margin value = Emission Level - Limit value

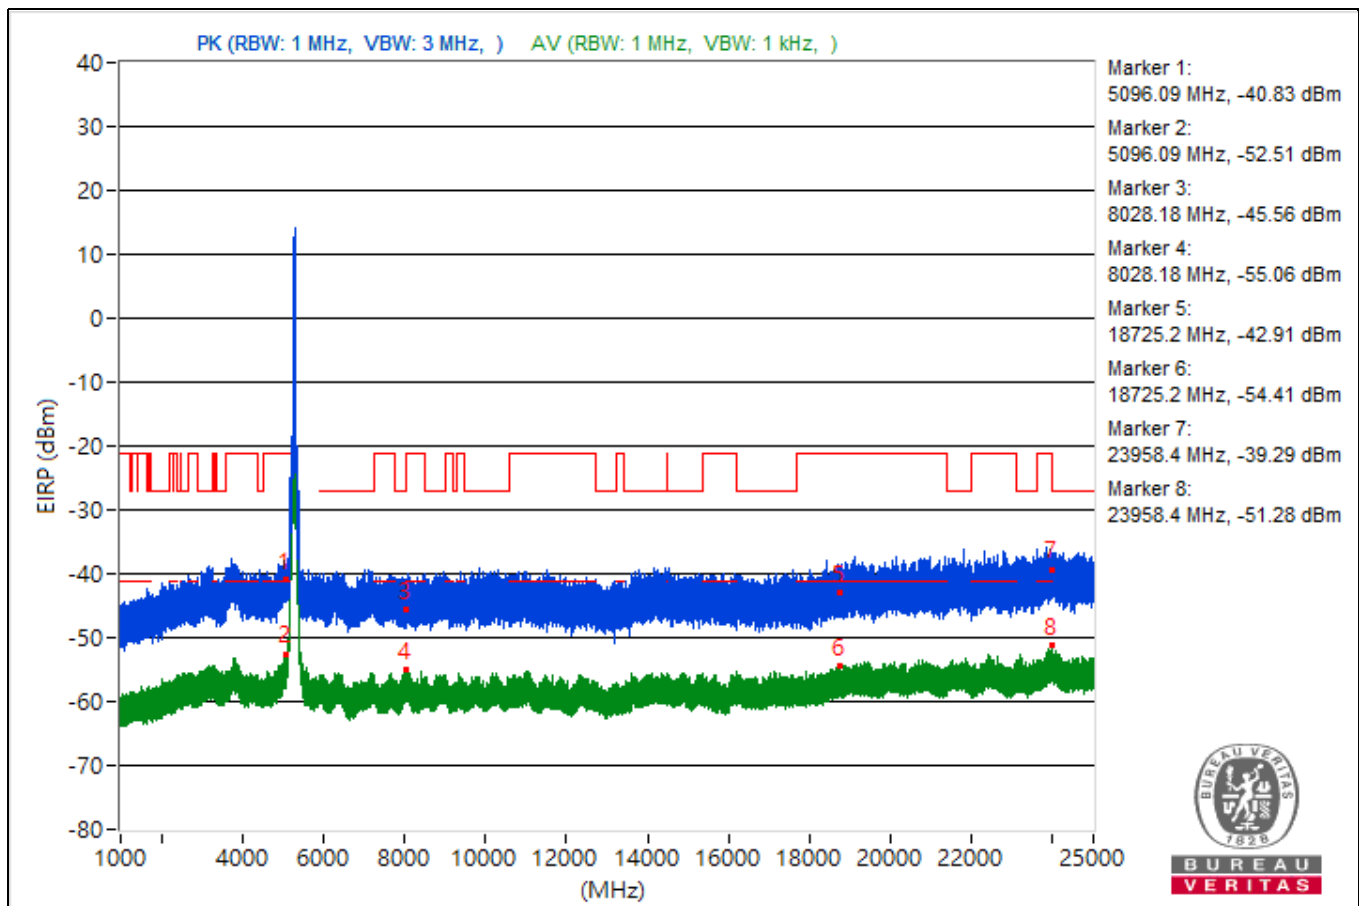


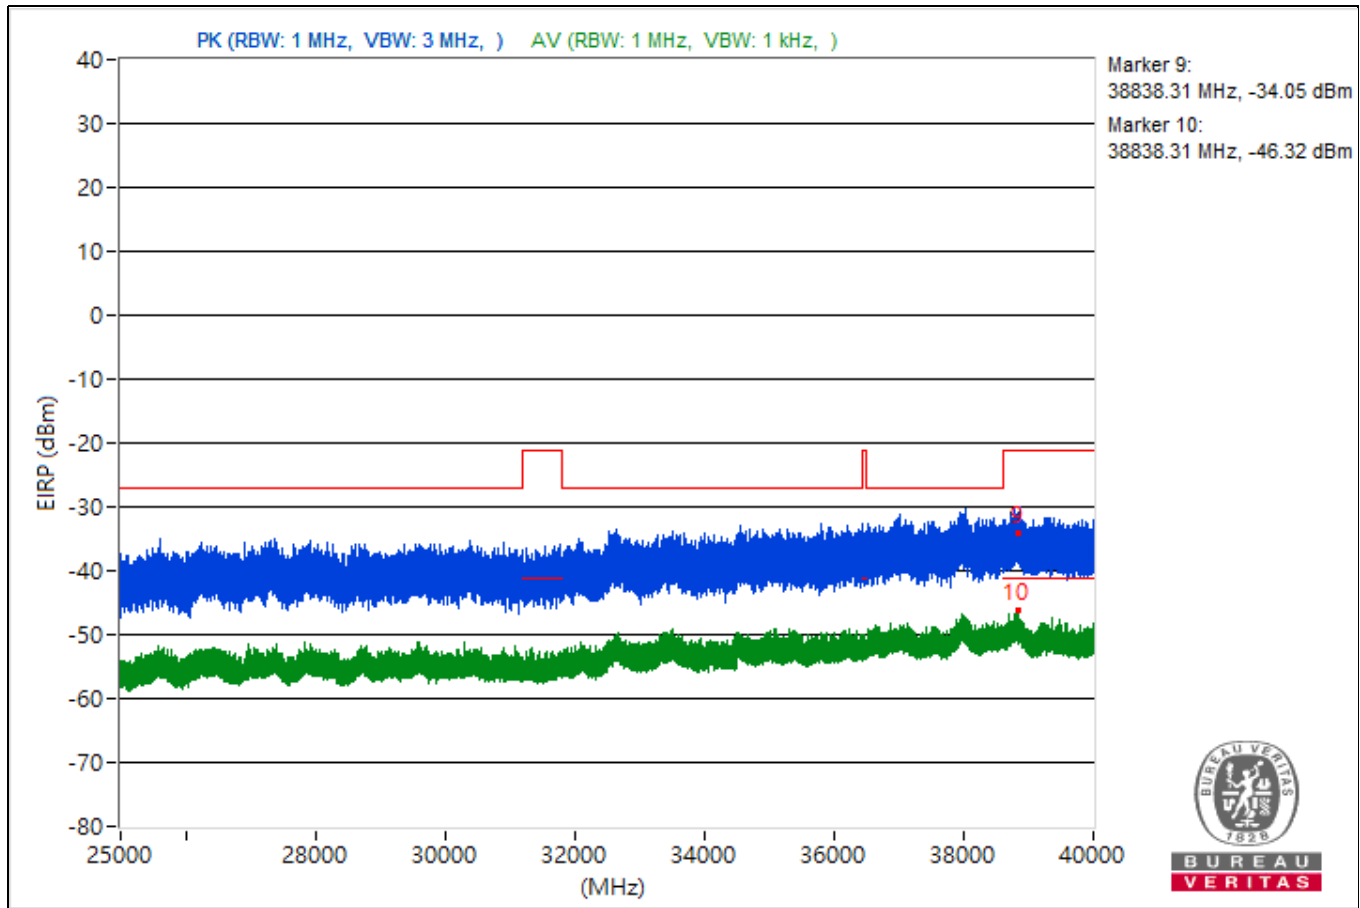


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3743.84	53.71 PK	74	-20.29	-46.47	4.92	-41.55
2	3743.84	42.07 AV	54	-11.93	-58.11	4.92	-53.19
3	8033.6	49.98 PK	74	-24.02	-50.2	4.92	-45.28
4	8033.6	40.27 AV	54	-13.73	-59.91	4.92	-54.99
5	18558.8	52.65 PK	74	-21.35	-47.53	4.92	-42.61
6	18558.8	40.67 AV	54	-13.33	-59.51	4.92	-54.59
7	23947.4	57.89 PK	74	-16.11	-42.29	4.92	-37.37
8	23947.4	43.39 AV	54	-10.61	-56.79	4.92	-51.87
9	38768.89	62.25 PK	74	-11.75	-37.93	4.92	-33.01
10	38768.89	48.42 AV	54	-5.58	-51.76	4.92	-46.84

Note: Margin value = Emission Level - Limit value

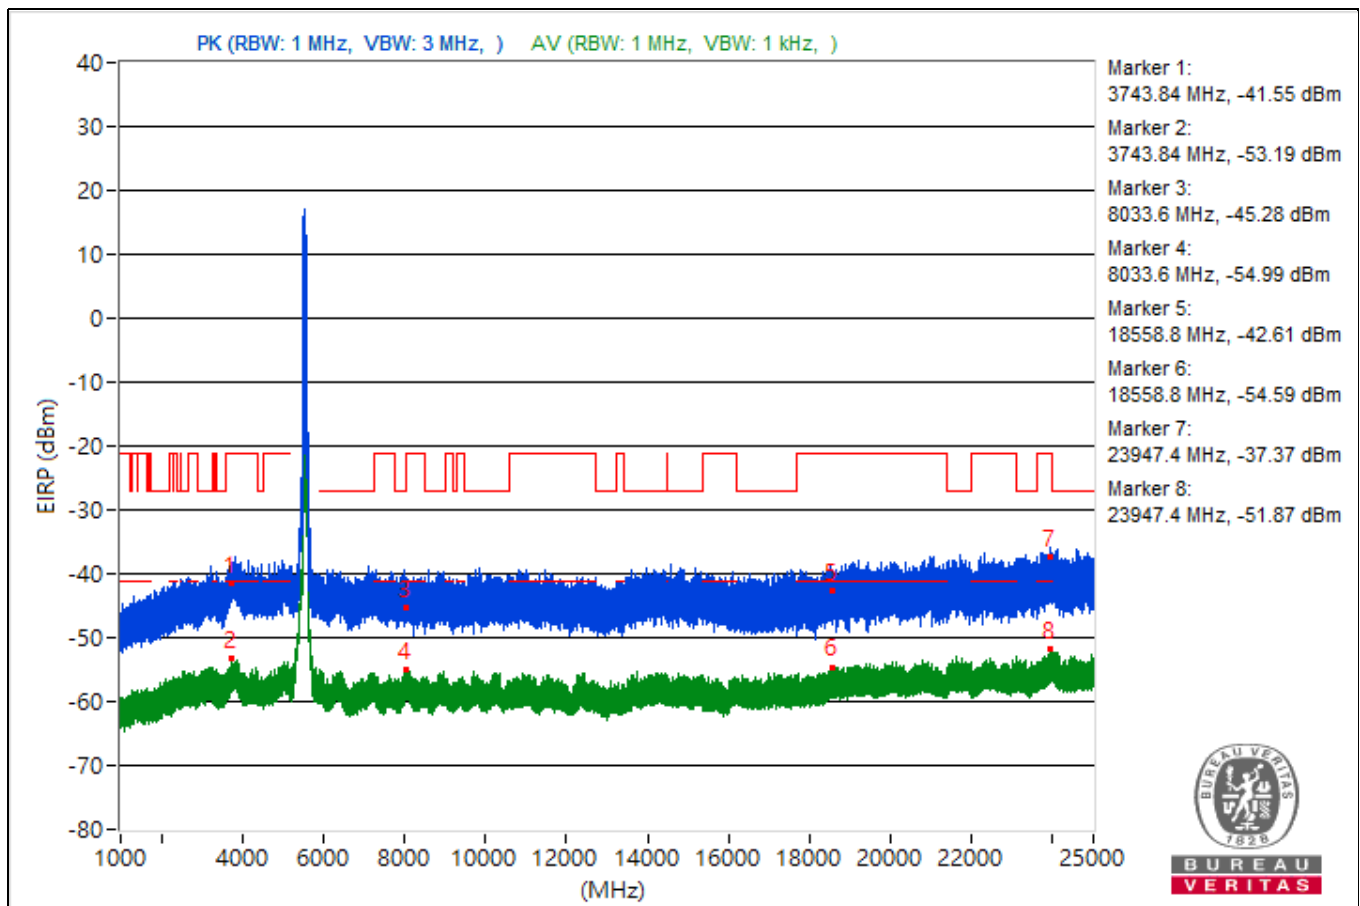


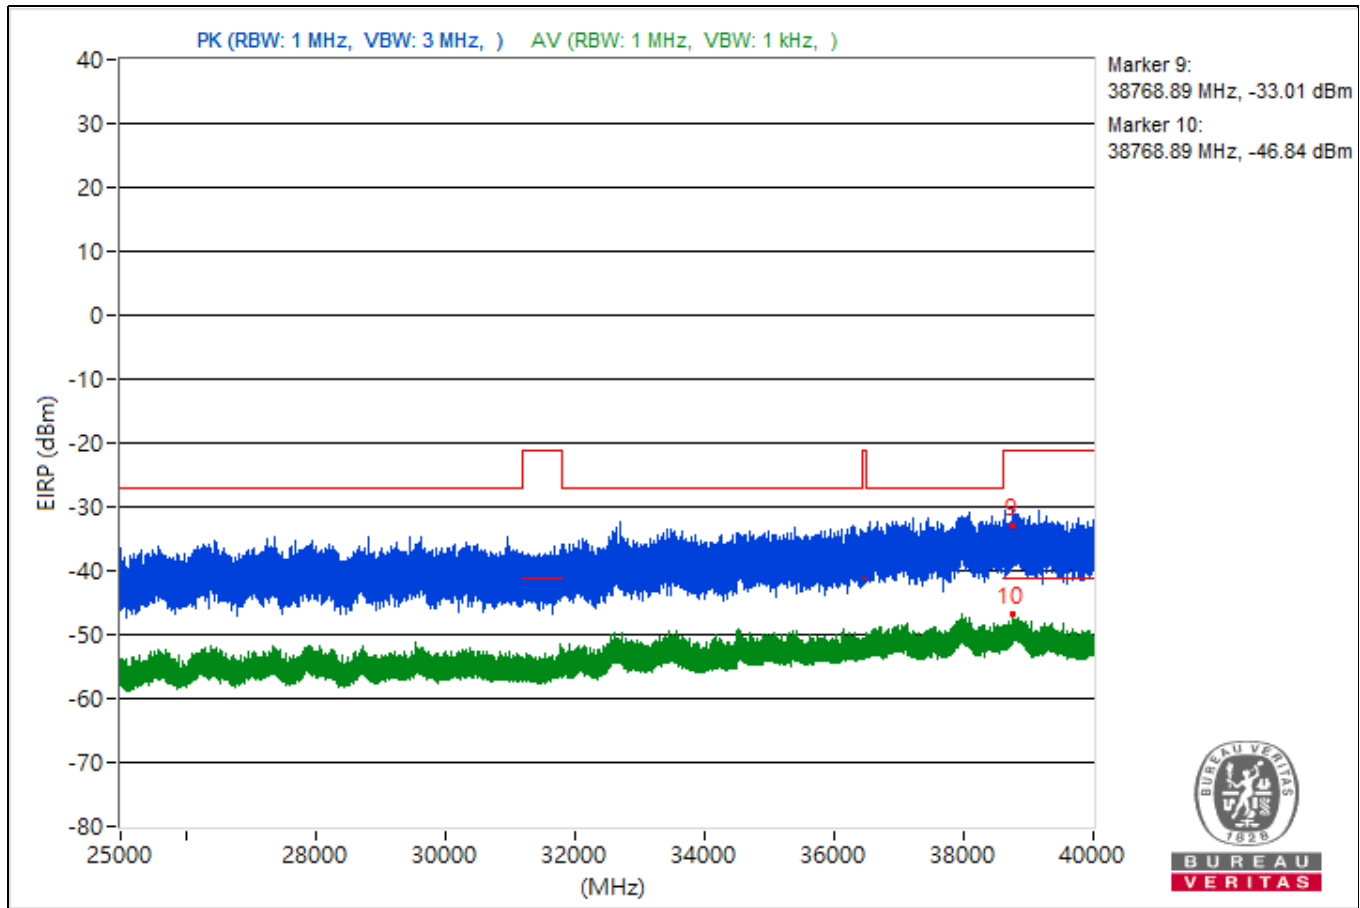


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3766.4	54.3 PK	74	-19.7	-45.88	4.92	-40.96
2	3766.4	41.71 AV	54	-12.29	-58.47	4.92	-53.55
3	8099.82	50.01 PK	74	-23.99	-50.17	4.92	-45.25
4	8099.82	40.25 AV	54	-13.75	-59.93	4.92	-55.01
5	18834.1	53.02 PK	74	-20.98	-47.16	4.92	-42.24
6	18834.1	41.01 AV	54	-12.99	-59.17	4.92	-54.25
7	23951.7	54.8 PK	74	-19.2	-45.38	4.92	-40.46
8	23951.7	43.61 AV	54	-10.39	-56.57	4.92	-51.65
9	38800.62	59.91 PK	74	-14.09	-40.27	4.92	-35.35
10	38800.62	48.37 AV	54	-5.63	-51.81	4.92	-46.89

Note: Margin value = Emission Level - Limit value

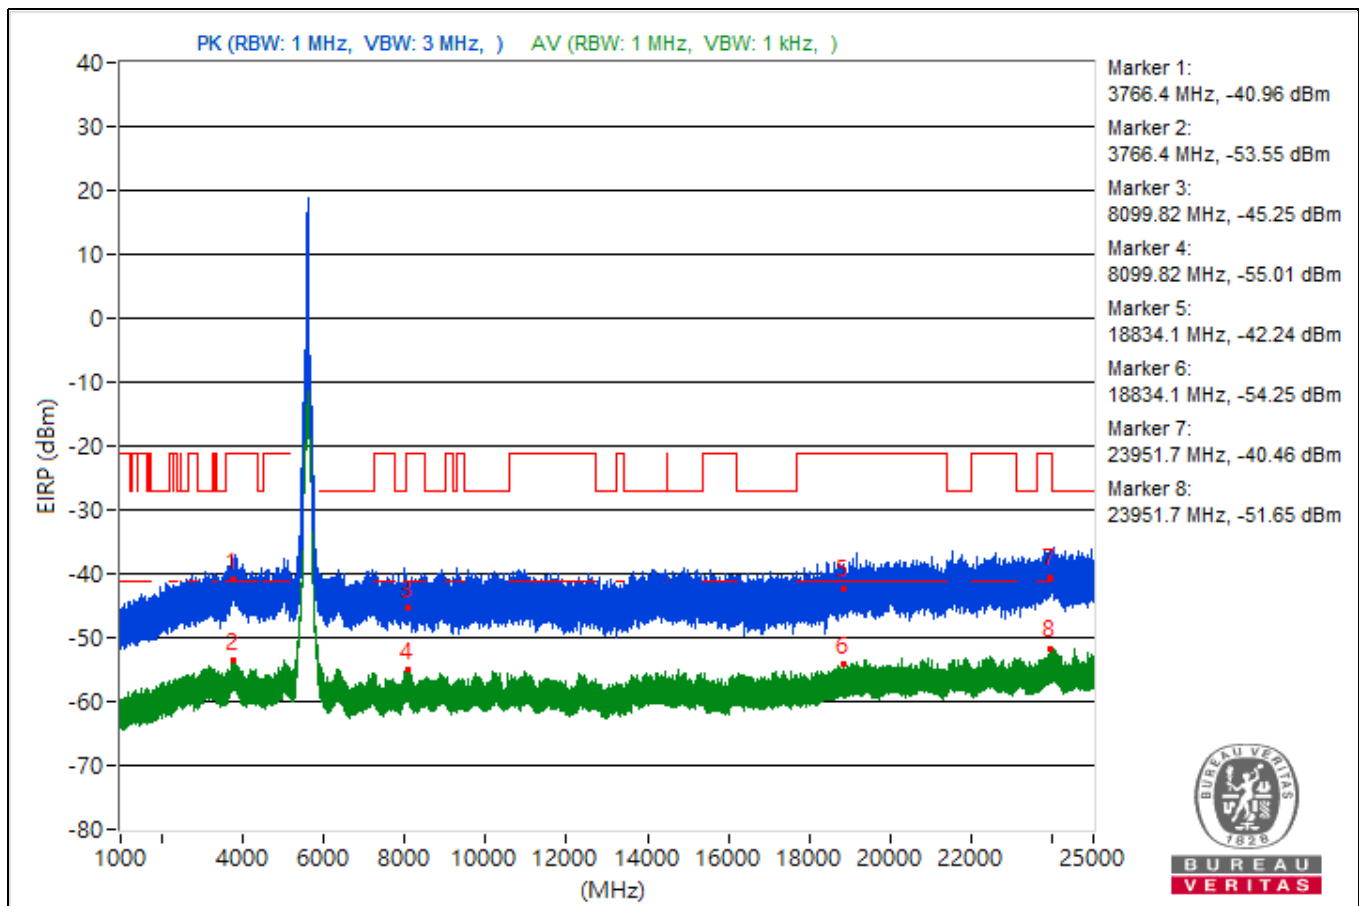


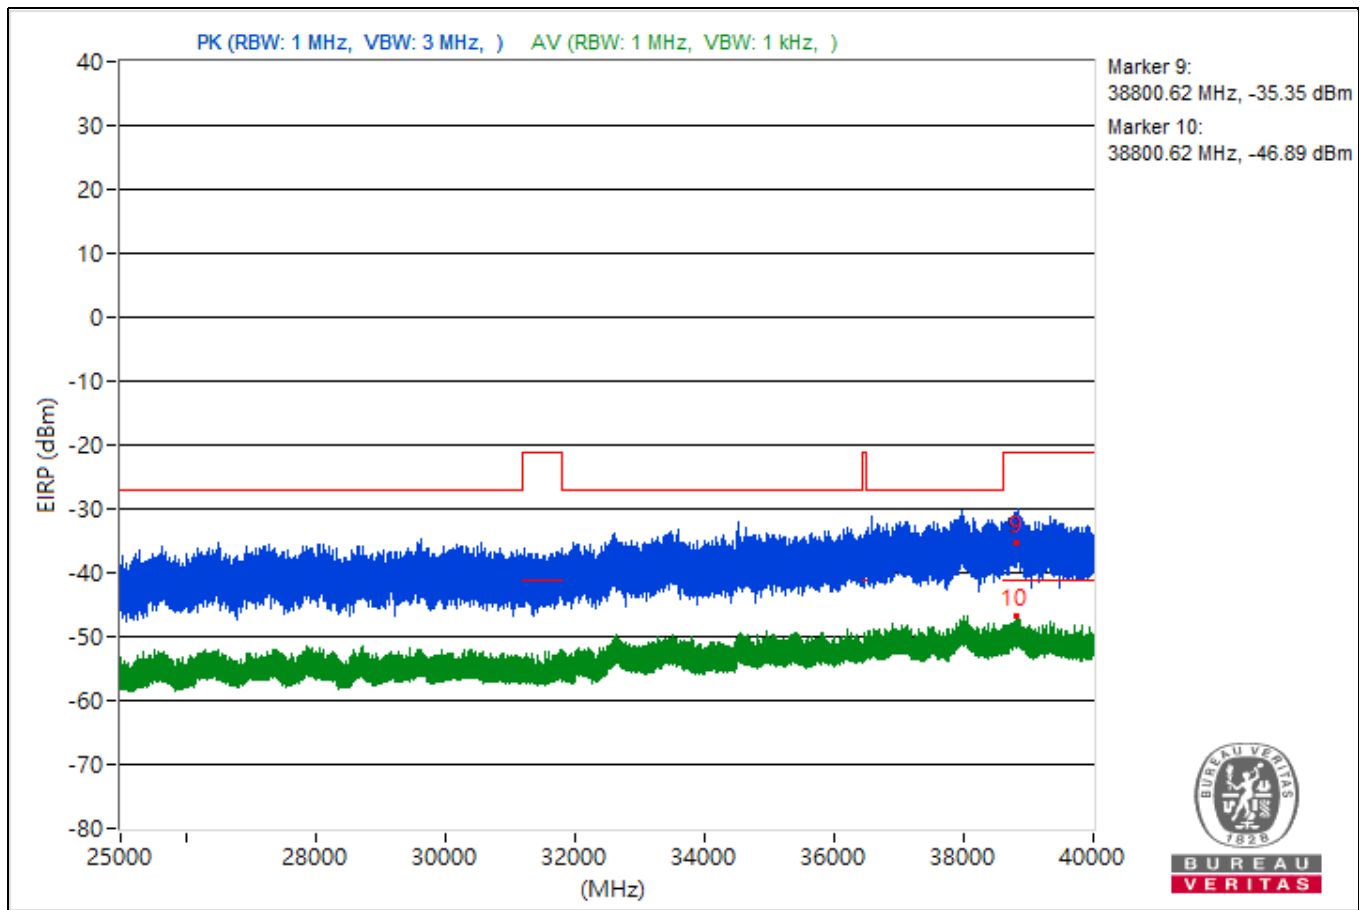


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.68	53.84 PK	74	-20.16	-46.34	4.92	-41.42
2	3805.68	42.14 AV	54	-11.86	-58.04	4.92	-53.12
3	10881.78	51.12 PK	74	-22.88	-49.06	4.92	-44.14
4	10881.78	40.78 AV	54	-13.22	-59.4	4.92	-54.48
5	18992.2	53.83 PK	74	-20.17	-46.35	4.92	-41.43
6	18992.2	41.19 AV	54	-12.81	-58.99	4.92	-54.07
7	23942	53.75 PK	74	-20.25	-46.43	4.92	-41.51
8	23942	43.63 AV	54	-10.37	-56.55	4.92	-51.63
9	38808.62	58.64 PK	74	-15.36	-41.54	4.92	-36.62
10	38808.62	49.29 AV	54	-4.71	-50.89	4.92	-45.97

Note: Margin value = Emission Level - Limit value

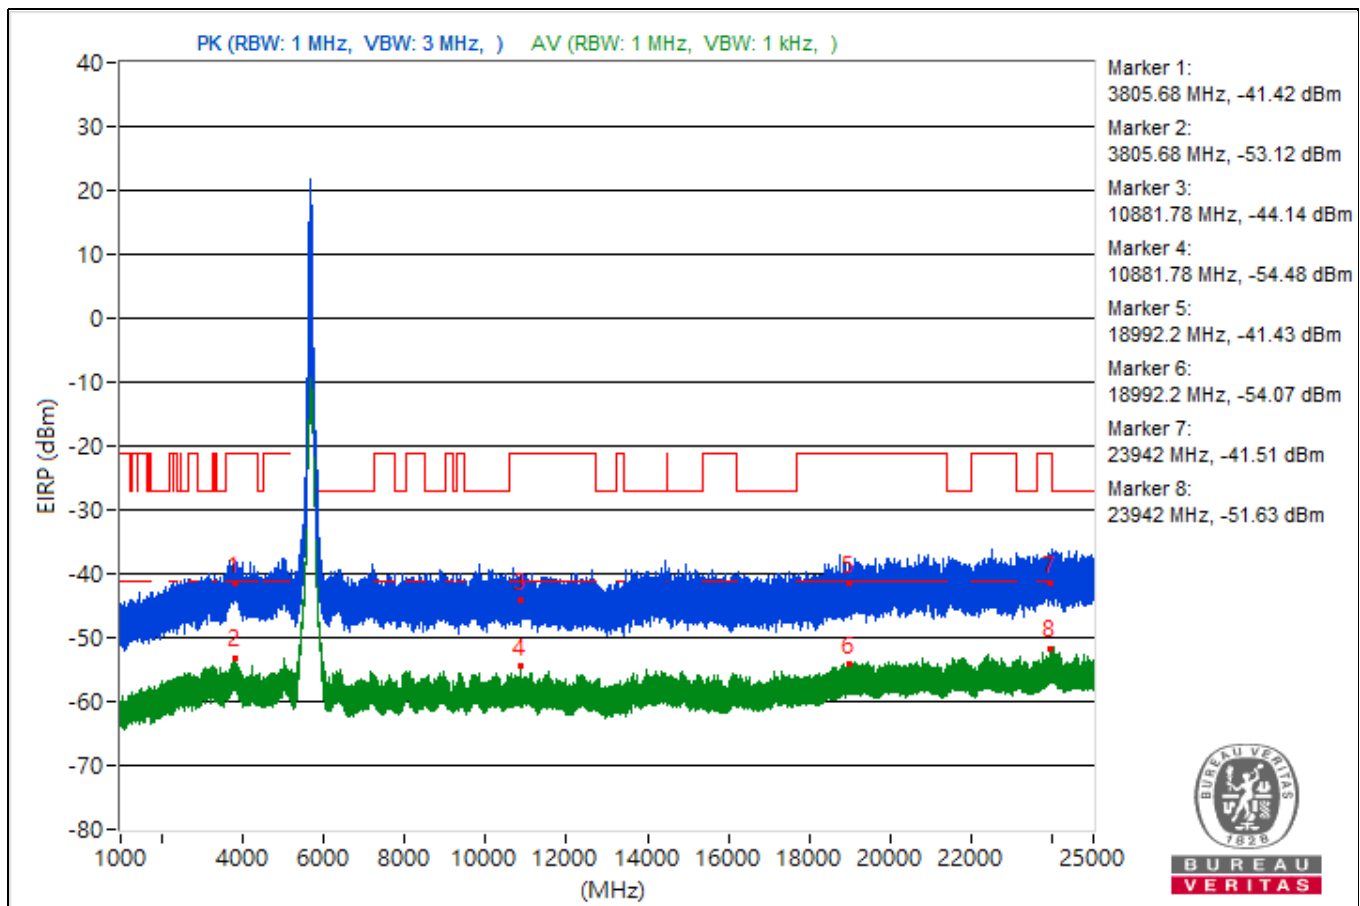


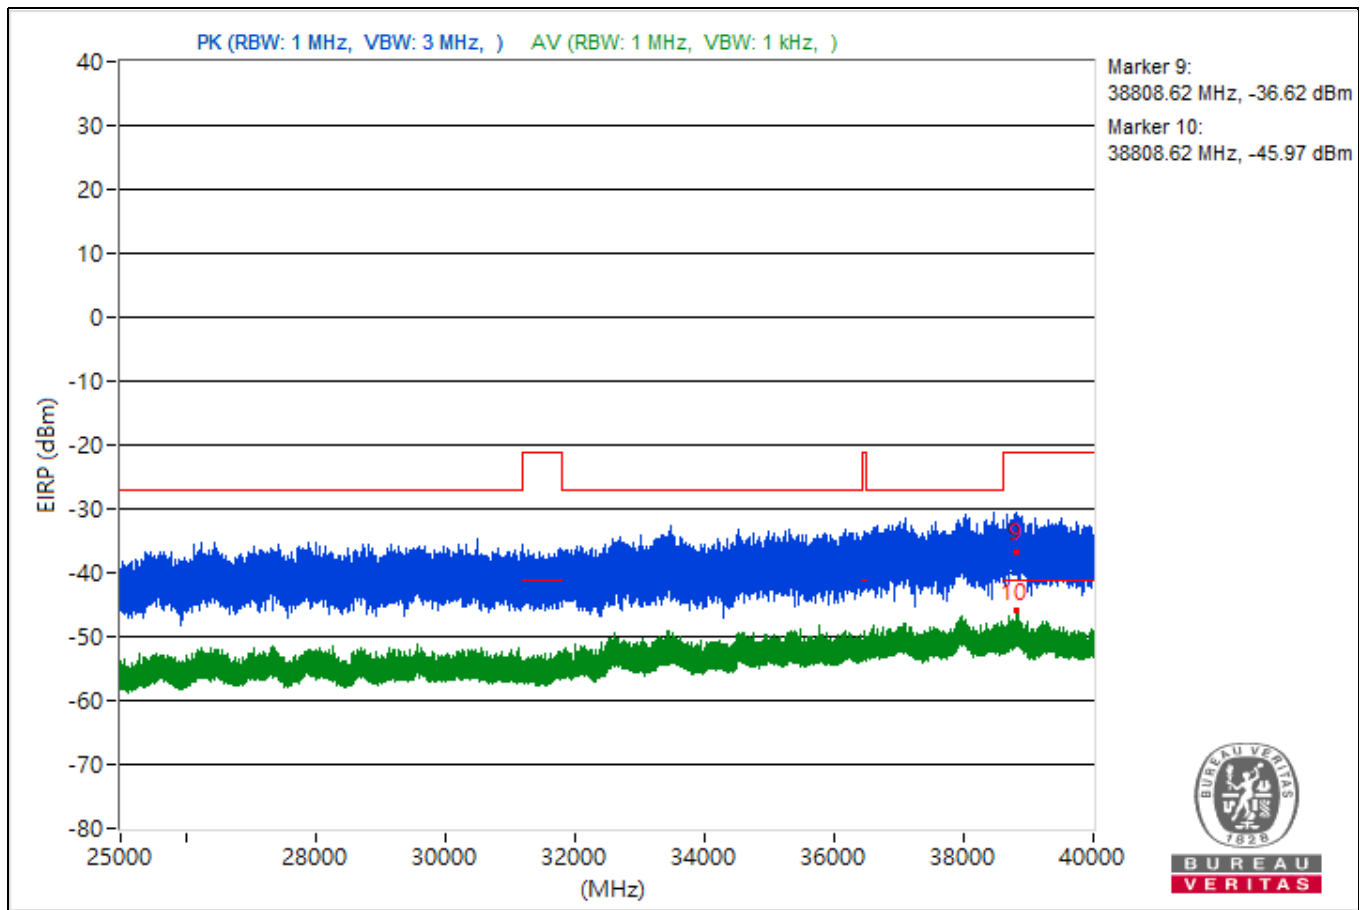


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5013.72	52.9 PK	74	-21.1	-47.28	4.92	-42.36
2	5013.72	42.26 AV	54	-11.74	-57.92	4.92	-53
3	8066.4	50.61 PK	74	-23.39	-49.57	4.92	-44.65
4	8066.4	40.36 AV	54	-13.64	-59.82	4.92	-54.9
5	18752.4	51.38 PK	74	-22.62	-48.8	4.92	-43.88
6	18752.4	40.73 AV	54	-13.27	-59.45	4.92	-54.53
7	23940.3	53.94 PK	74	-20.06	-46.24	4.92	-41.32
8	23940.3	43.93 AV	54	-10.07	-56.25	4.92	-51.33
9	38807.73	59.59 PK	74	-14.41	-40.59	4.92	-35.67
10	38807.73	48.62 AV	54	-5.38	-51.56	4.92	-46.64

Note: Margin value = Emission Level - Limit value

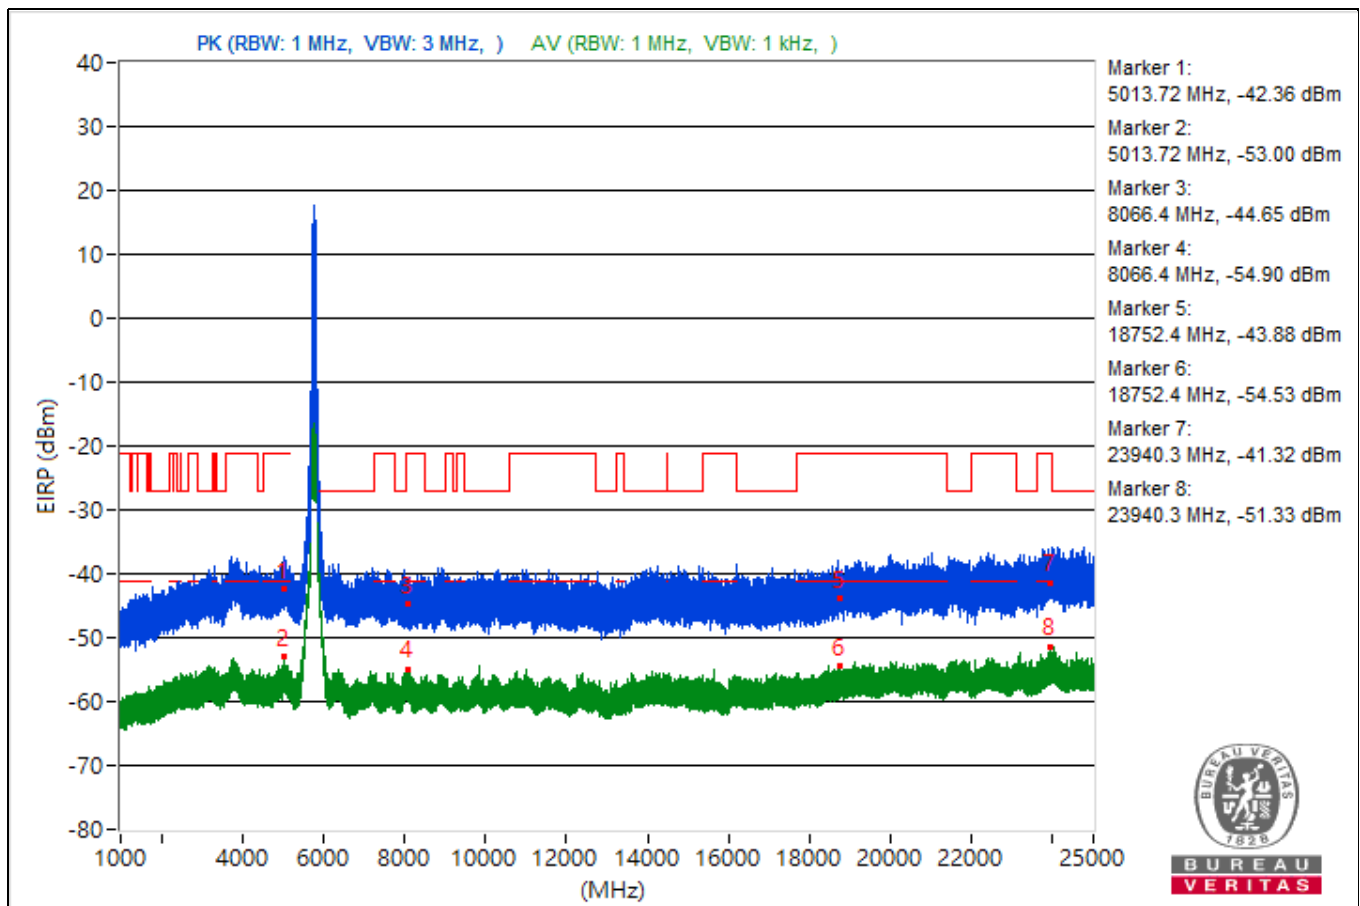


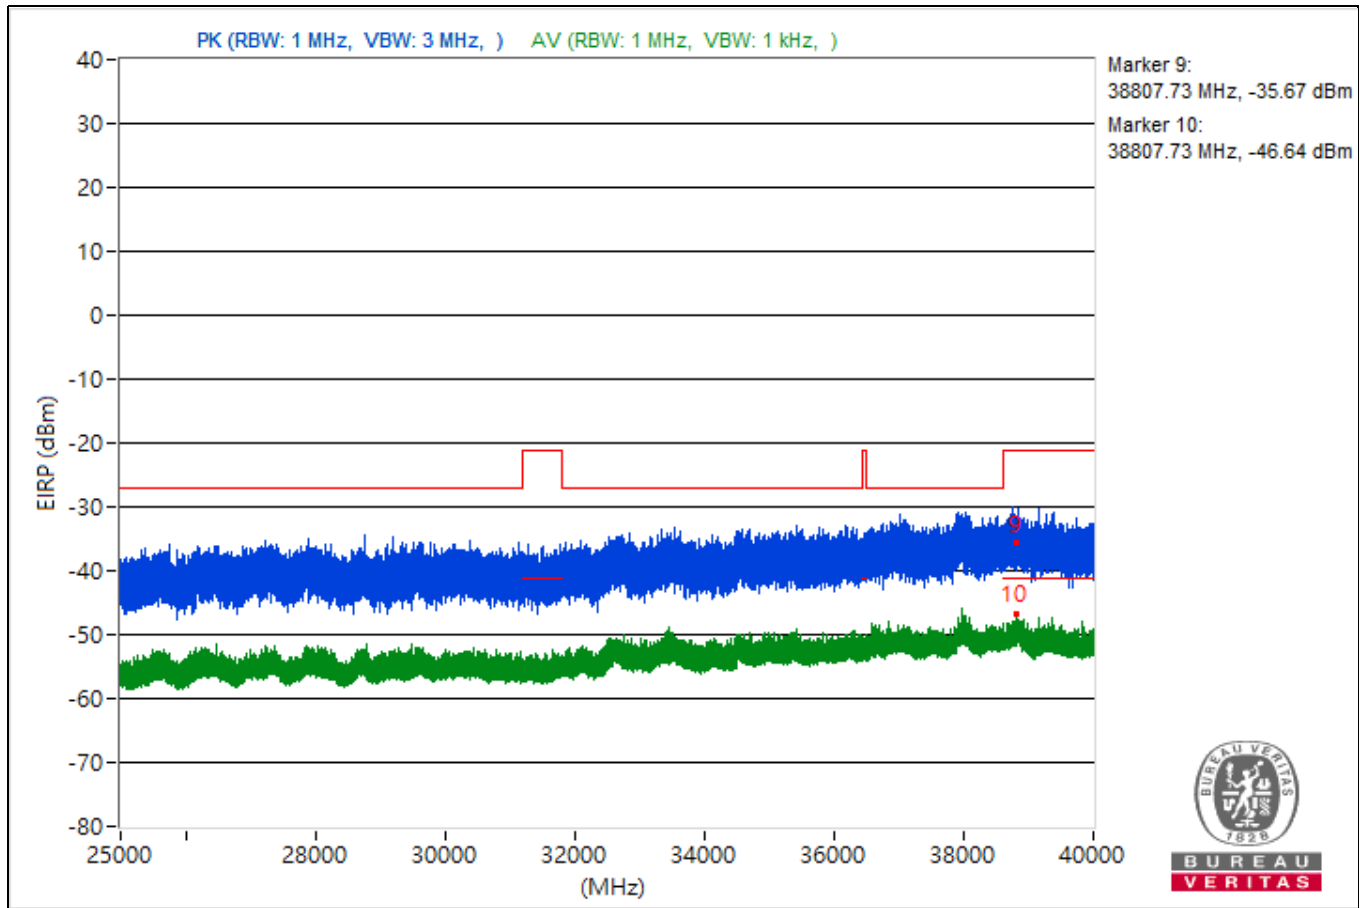


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.82	58.24 PK	74	-15.76	-41.94	4.92	-37.02
2	5099.82	50.21 AV	54	-3.79	-49.97	4.92	-45.05
3	8055.38	49.39 PK	74	-24.61	-50.79	4.92	-45.87
4	8055.38	40.25 AV	54	-13.75	-59.93	4.92	-55.01
5	18874.6	51.43 PK	74	-22.57	-48.75	4.92	-43.83
6	18874.6	40.9 AV	54	-13.1	-59.28	4.92	-54.36
7	23933.5	54.99 PK	74	-19.01	-45.19	4.92	-40.27
8	23933.5	43.11 AV	54	-10.89	-57.07	4.92	-52.15
9	38819.82	61.39 PK	74	-12.61	-38.79	4.92	-33.87
10	38819.82	48.24 AV	54	-5.76	-51.94	4.92	-47.02

Note: Margin value = Emission Level - Limit value

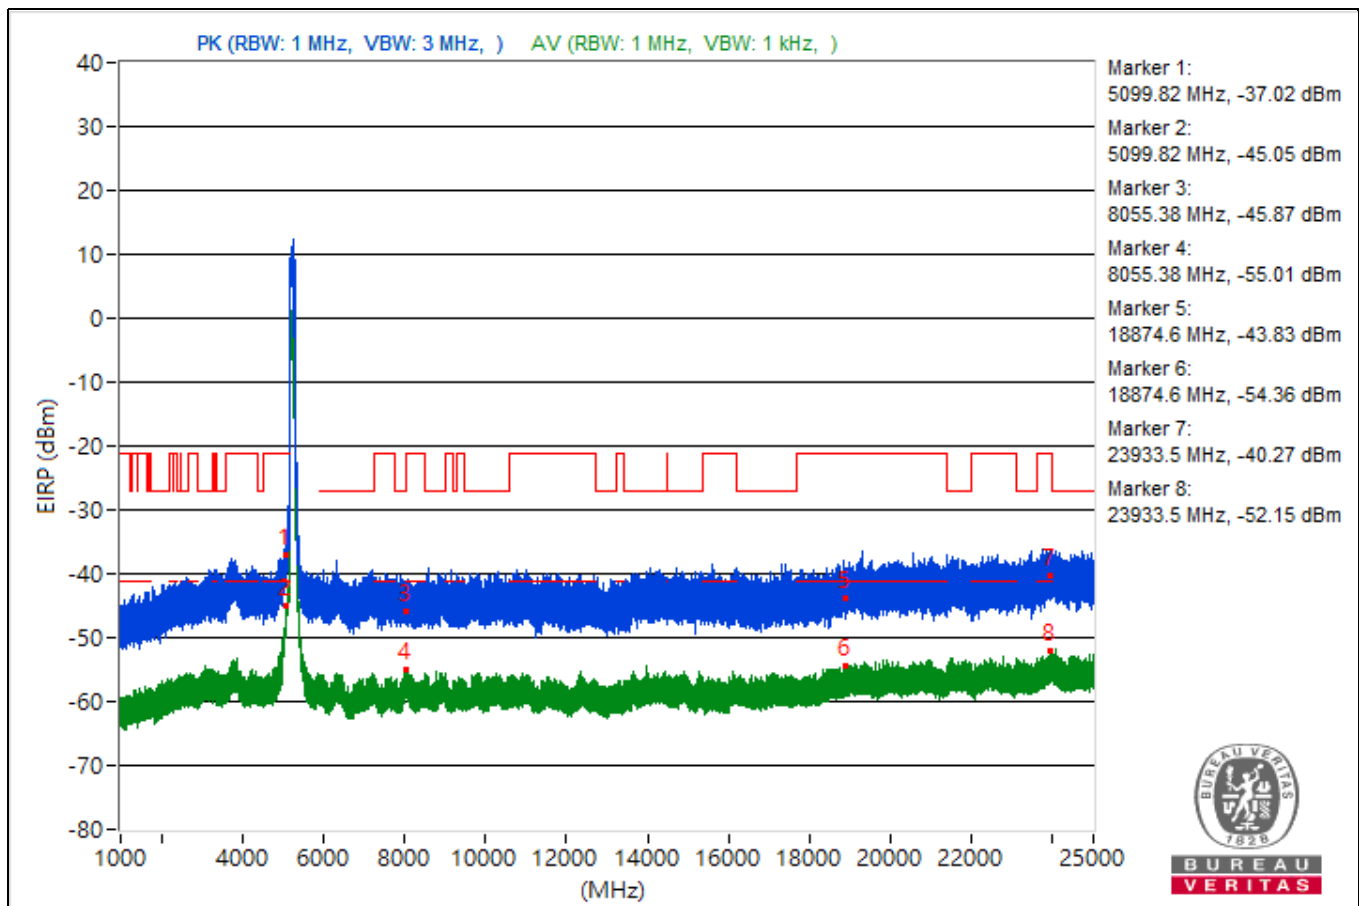


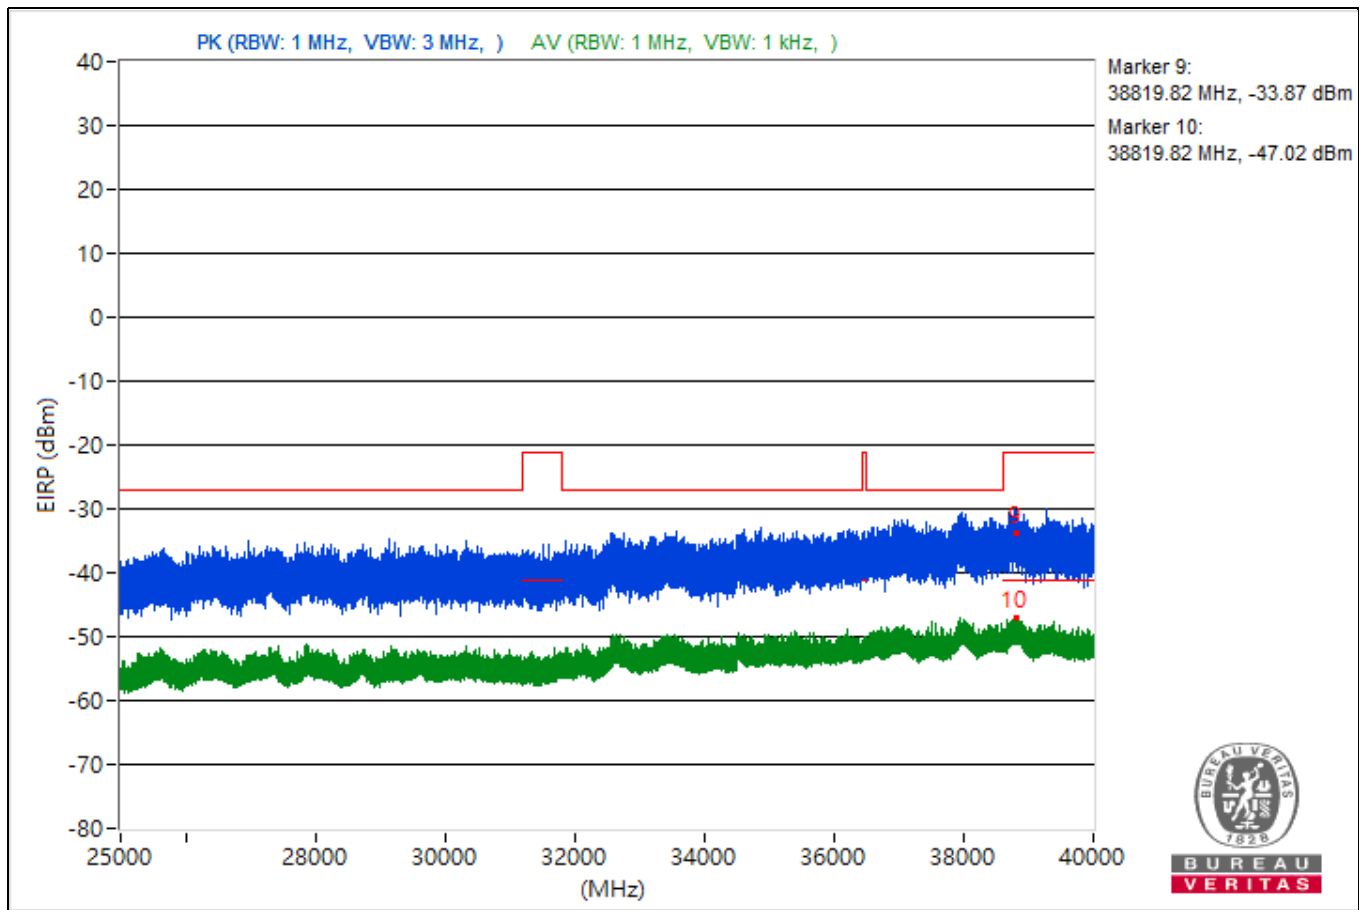


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5017.92	55.13 PK	74	-18.87	-45.05	4.92	-40.13
2	5017.92	42.02 AV	54	-11.98	-58.16	4.92	-53.24
3	8051.64	50.85 PK	74	-23.15	-49.33	4.92	-44.41
4	8051.64	40.32 AV	54	-13.68	-59.86	4.92	-54.94
5	18930.6	51.7 PK	74	-22.3	-48.48	4.92	-43.56
6	18930.6	40.9 AV	54	-13.1	-59.28	4.92	-54.36
7	23926.4	55.62 PK	74	-18.38	-44.56	4.92	-39.64
8	23926.4	42.99 AV	54	-11.01	-57.19	4.92	-52.27
9	38890.22	57.68 PK	74	-16.32	-42.5	4.92	-37.58
10	38890.22	48.19 AV	54	-5.81	-51.99	4.92	-47.07

Note: Margin value = Emission Level - Limit value

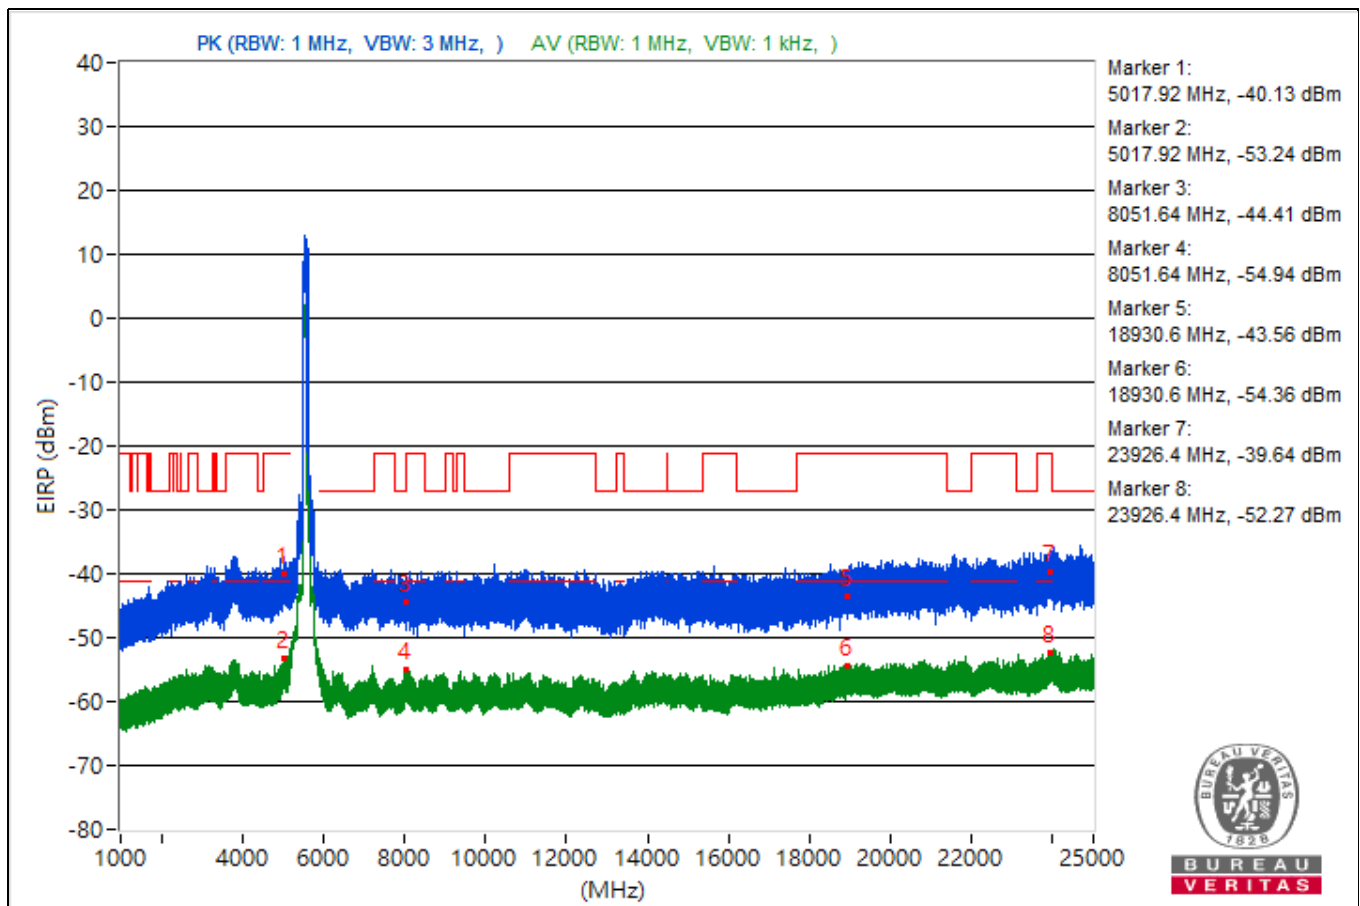


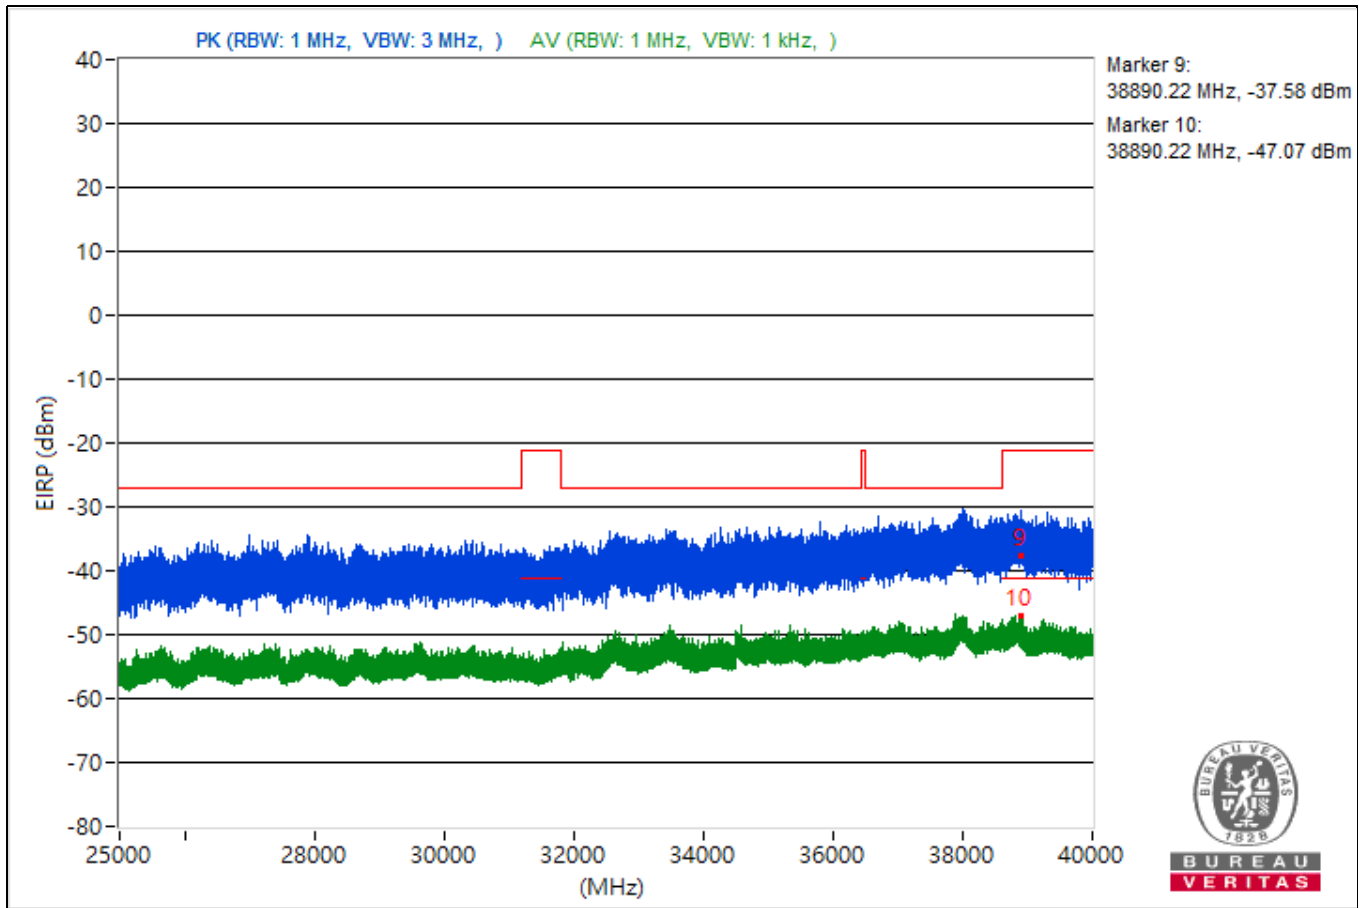


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.27	58.86 PK	74	-15.14	-41.32	4.92	-36.4
2	5098.27	51.24 AV	54	-2.76	-48.94	4.92	-44.02
3	8046.58	51.07 PK	74	-22.93	-49.11	4.92	-44.19
4	8046.58	40.5 AV	54	-13.5	-59.68	4.92	-54.76
5	18957.2	53.08 PK	74	-20.92	-47.1	4.92	-42.18
6	18957.2	41.36 AV	54	-12.64	-58.82	4.92	-53.9
7	23968.1	55.13 PK	74	-18.87	-45.05	4.92	-40.13
8	23968.1	43.38 AV	54	-10.62	-56.8	4.92	-51.88
9	38845.78	59.07 PK	74	-14.93	-41.11	4.92	-36.19
10	38845.78	48.56 AV	54	-5.44	-51.62	4.92	-46.7

Note: Margin value = Emission Level - Limit value

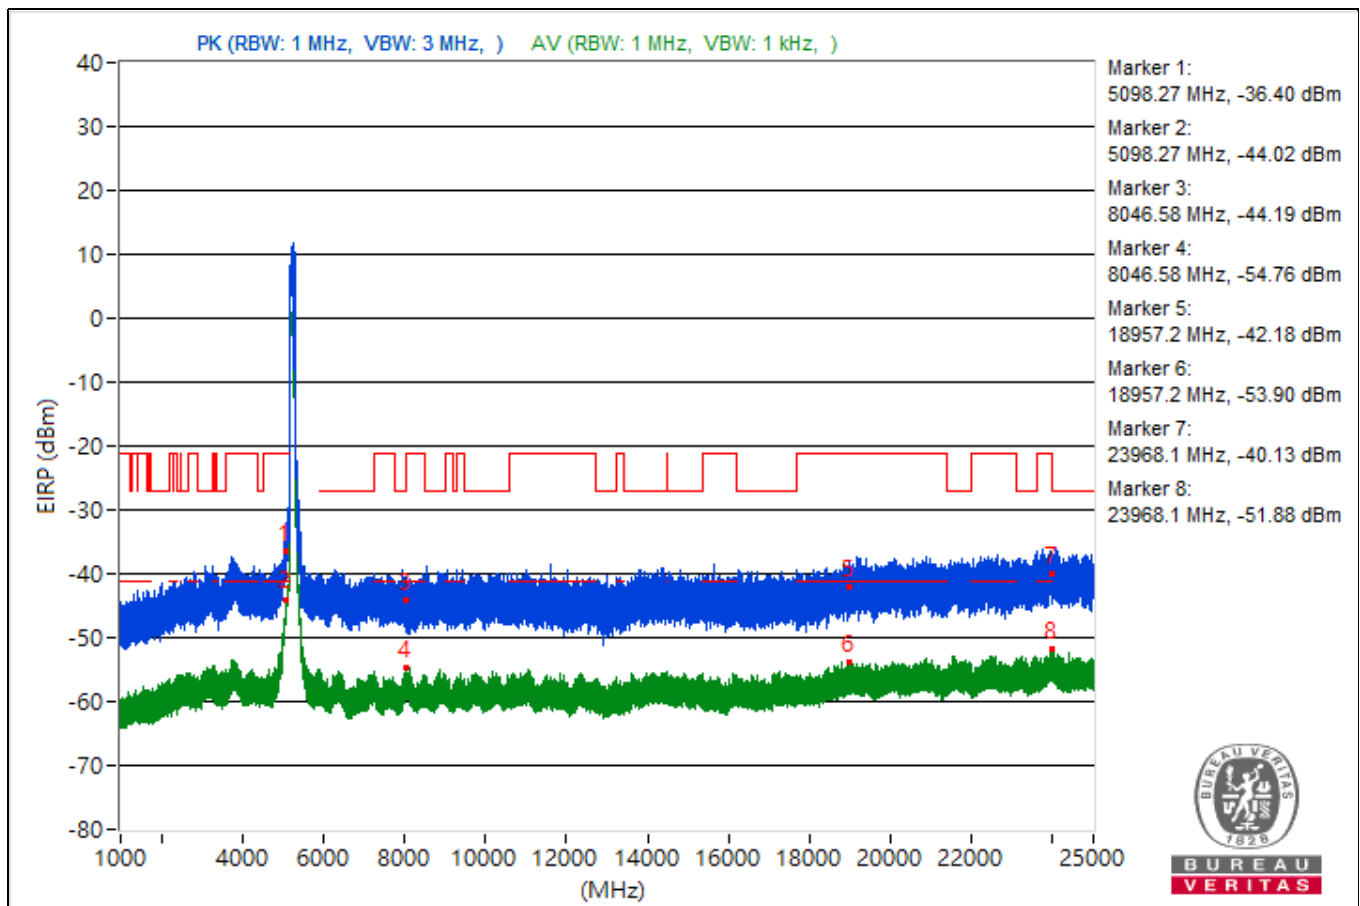


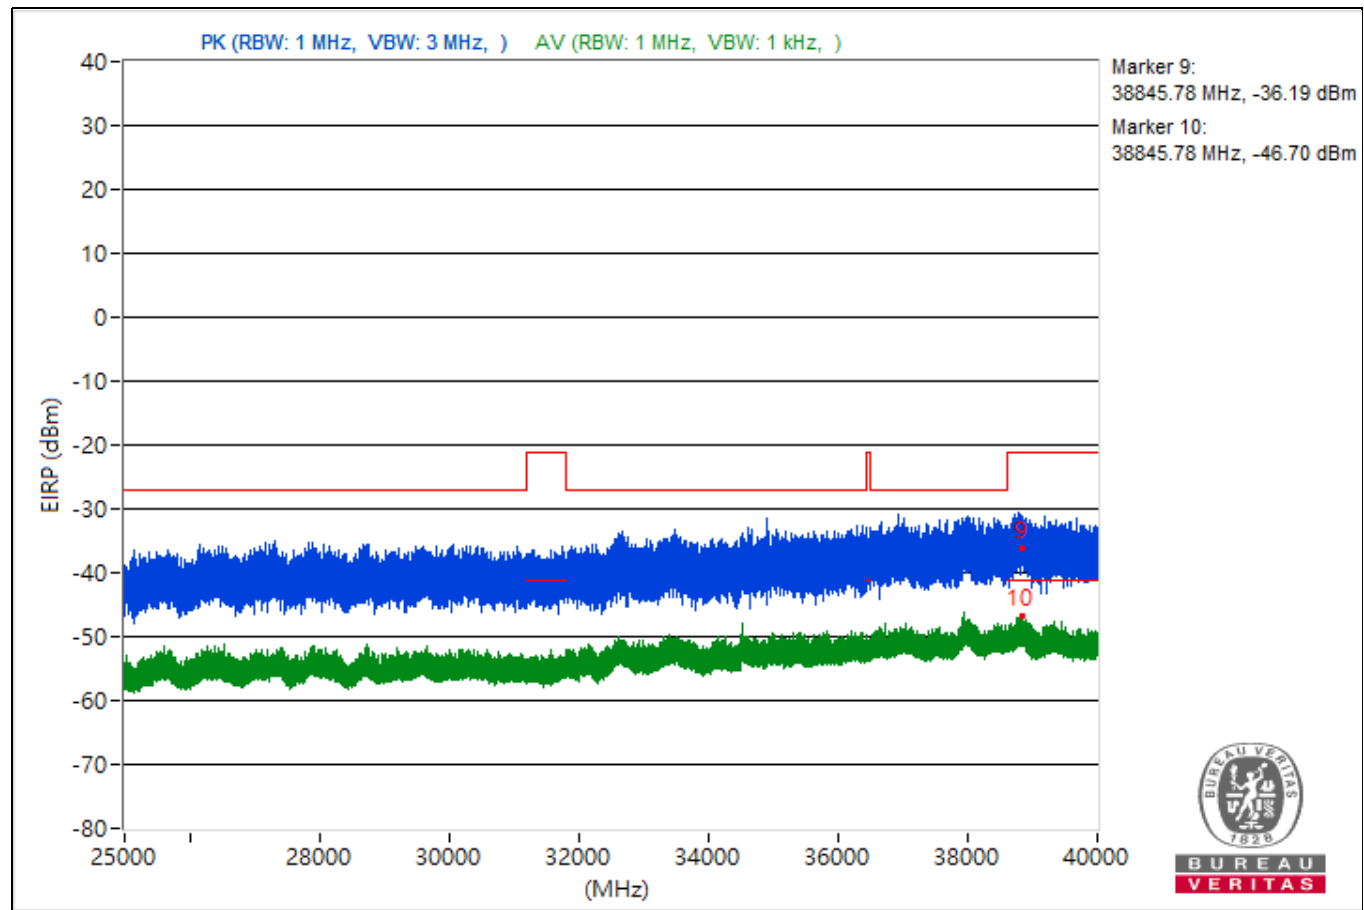


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.06	54.73 PK	74	-19.27	-45.45	4.92	-40.53
2	3798.06	42.2 AV	54	-11.8	-57.98	4.92	-53.06
3	8068.36	51.27 PK	74	-22.73	-48.91	4.92	-43.99
4	8068.36	40.69 AV	54	-13.31	-59.49	4.92	-54.57
5	18813.6	52.25 PK	74	-21.75	-47.93	4.92	-43.01
6	18813.6	41.2 AV	54	-12.8	-58.98	4.92	-54.06
7	23938.5	54.65 PK	74	-19.35	-45.53	4.92	-40.61
8	23938.5	43.73 AV	54	-10.27	-56.45	4.92	-51.53
9	38780.36	57.93 PK	74	-16.07	-42.25	4.92	-37.33
10	38780.36	48.49 AV	54	-5.51	-51.69	4.92	-46.77

Note: Margin value = Emission Level - Limit value

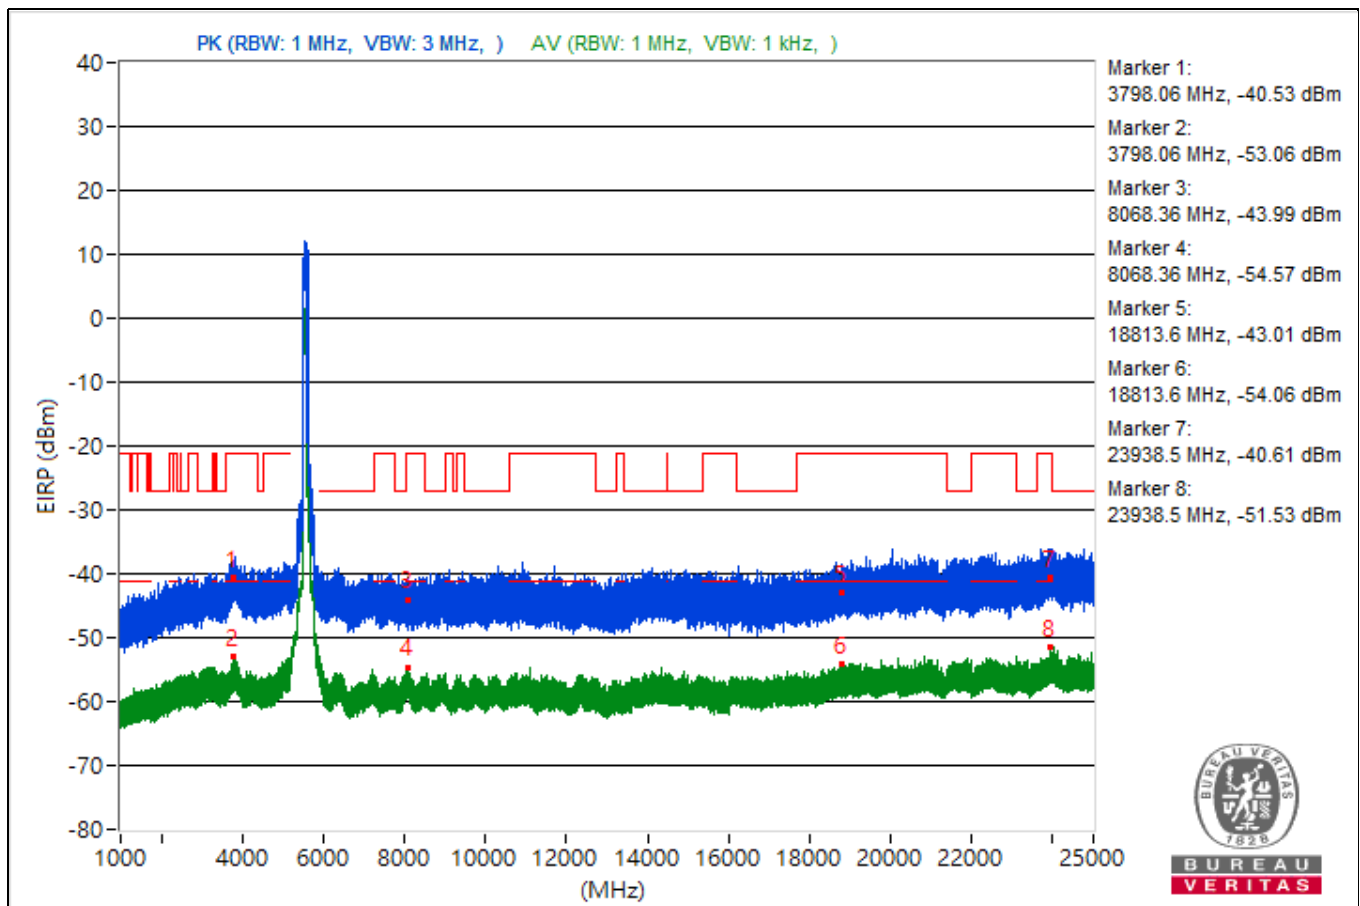

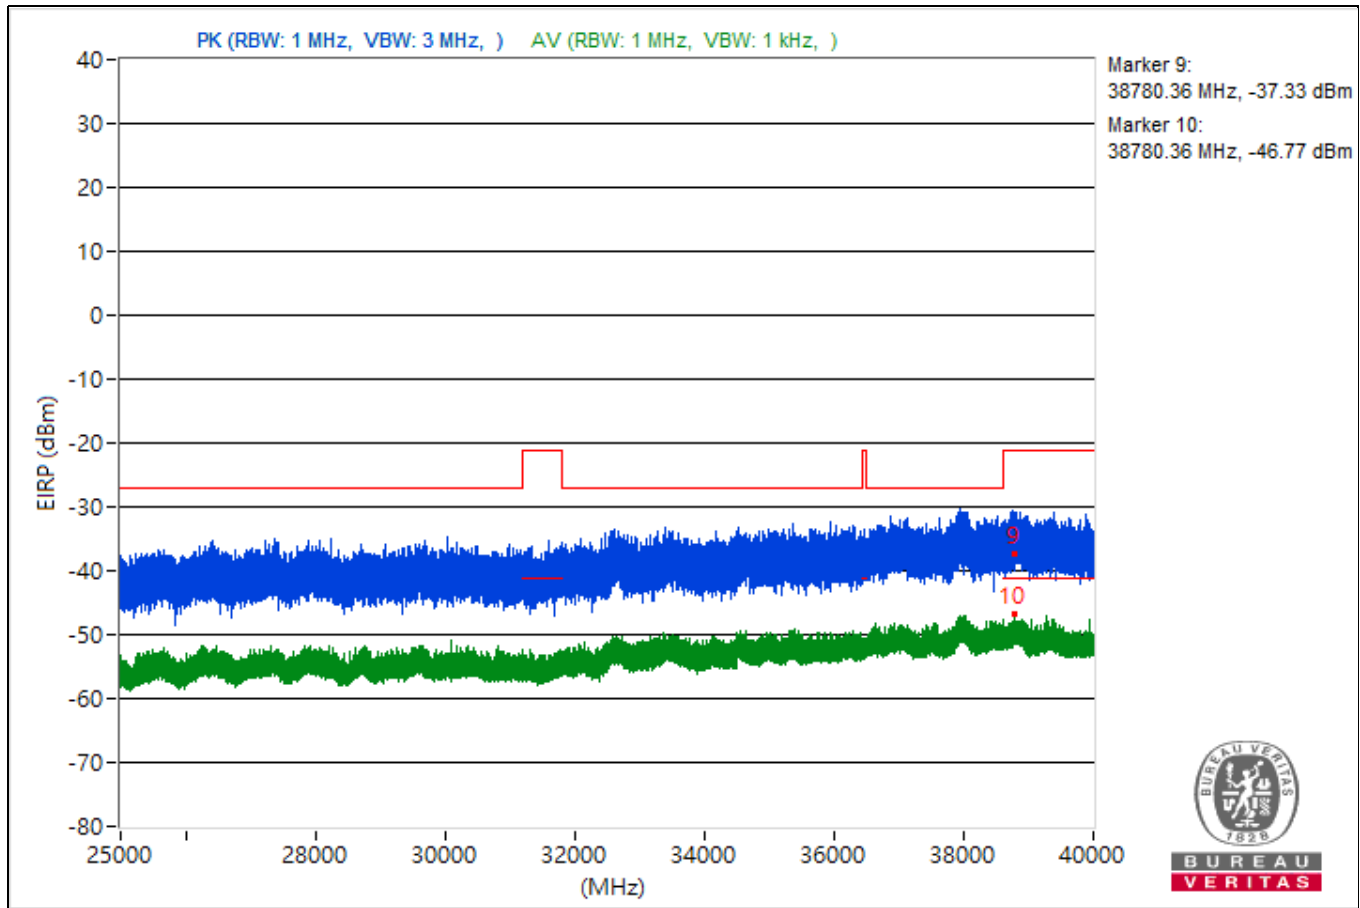


Conducted Band Edges

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5179.12	114.56 PK			14.38	4.92	19.3
2	*5179.12	108.5 AV			8.32	4.92	13.24
3	5149.82	58.82 PK	74	-15.18	-41.36	4.92	-36.44
4	5149.82	50.63 AV	54	-3.37	-49.55	4.92	-44.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

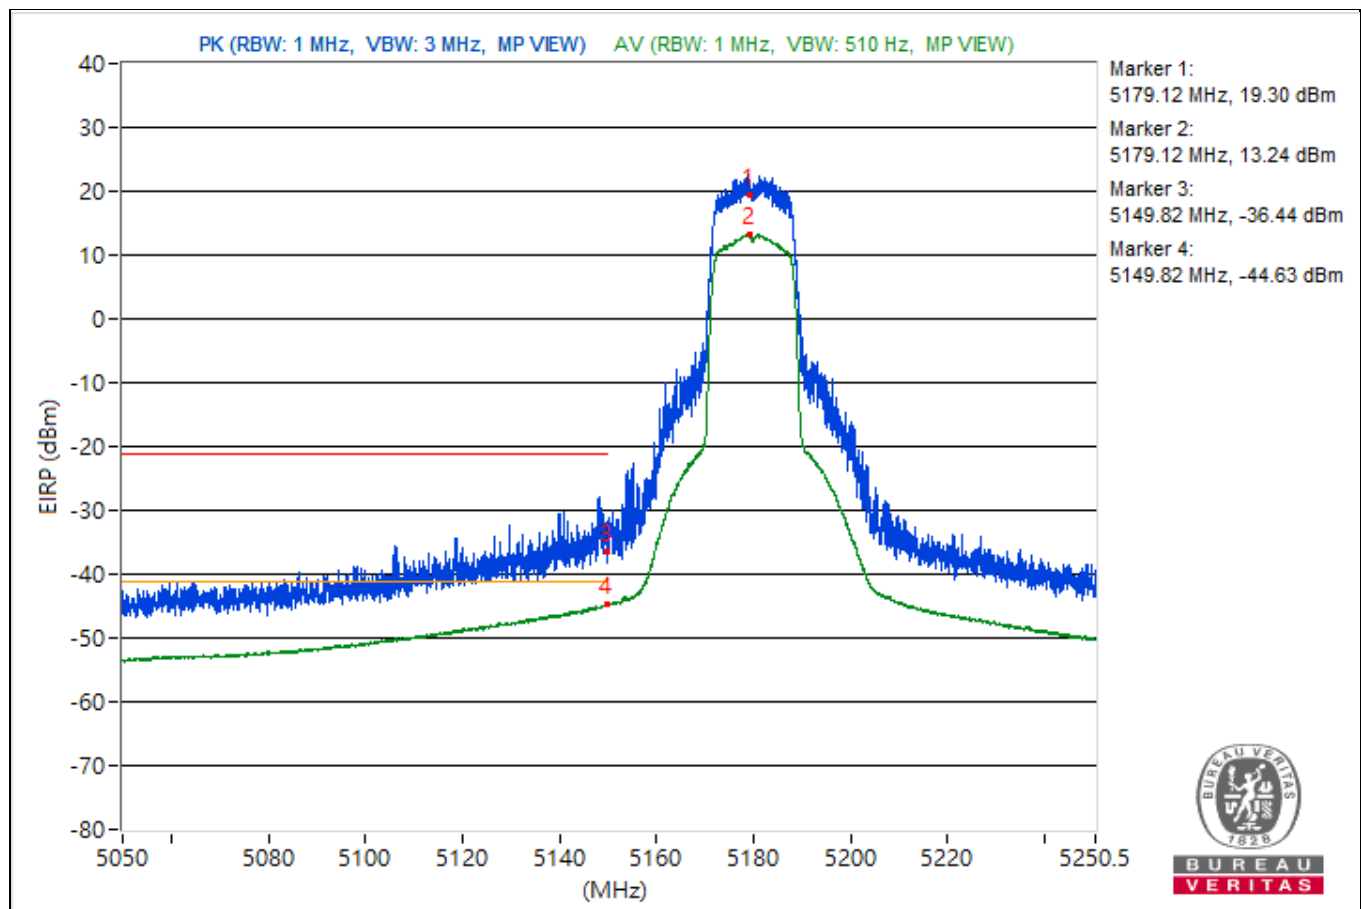


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5198.82	116.2 PK			16.02	4.92	20.94
2	*5198.82	109.75 AV			9.57	4.92	14.49
3	5149.97	58.93 PK	74	-15.07	-41.25	4.92	-36.33
4	5149.97	49.47 AV	54	-4.53	-50.71	4.92	-45.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

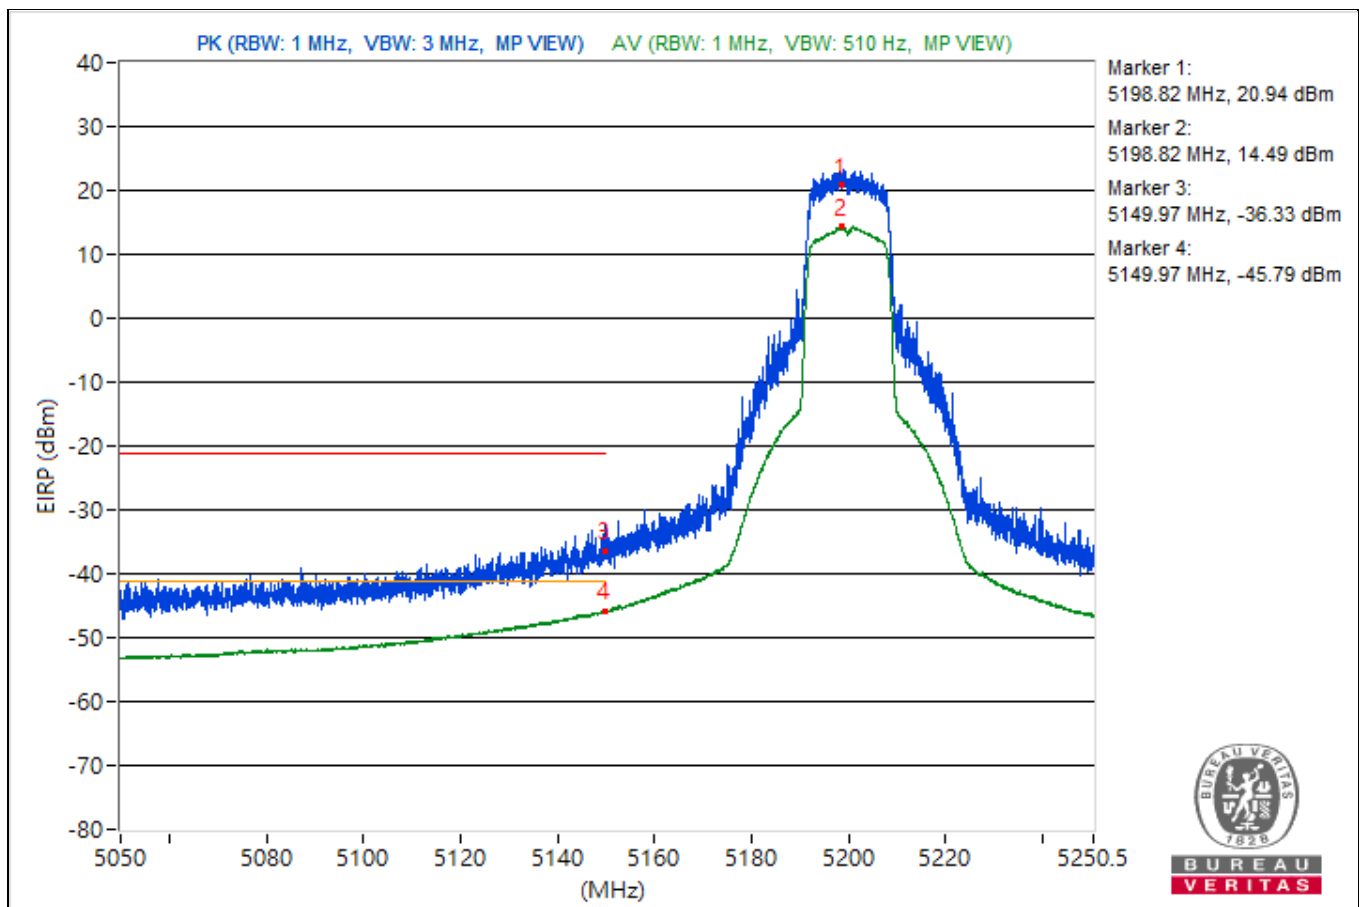


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5241.45	116.07 PK			15.89	4.92	20.81
2	*5241.45	109.48 AV			9.3	4.92	14.22
3	5149.62	52.91 PK	74	-21.09	-47.27	4.92	-42.35
4	5149.62	44.82 AV	54	-9.18	-55.36	4.92	-50.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

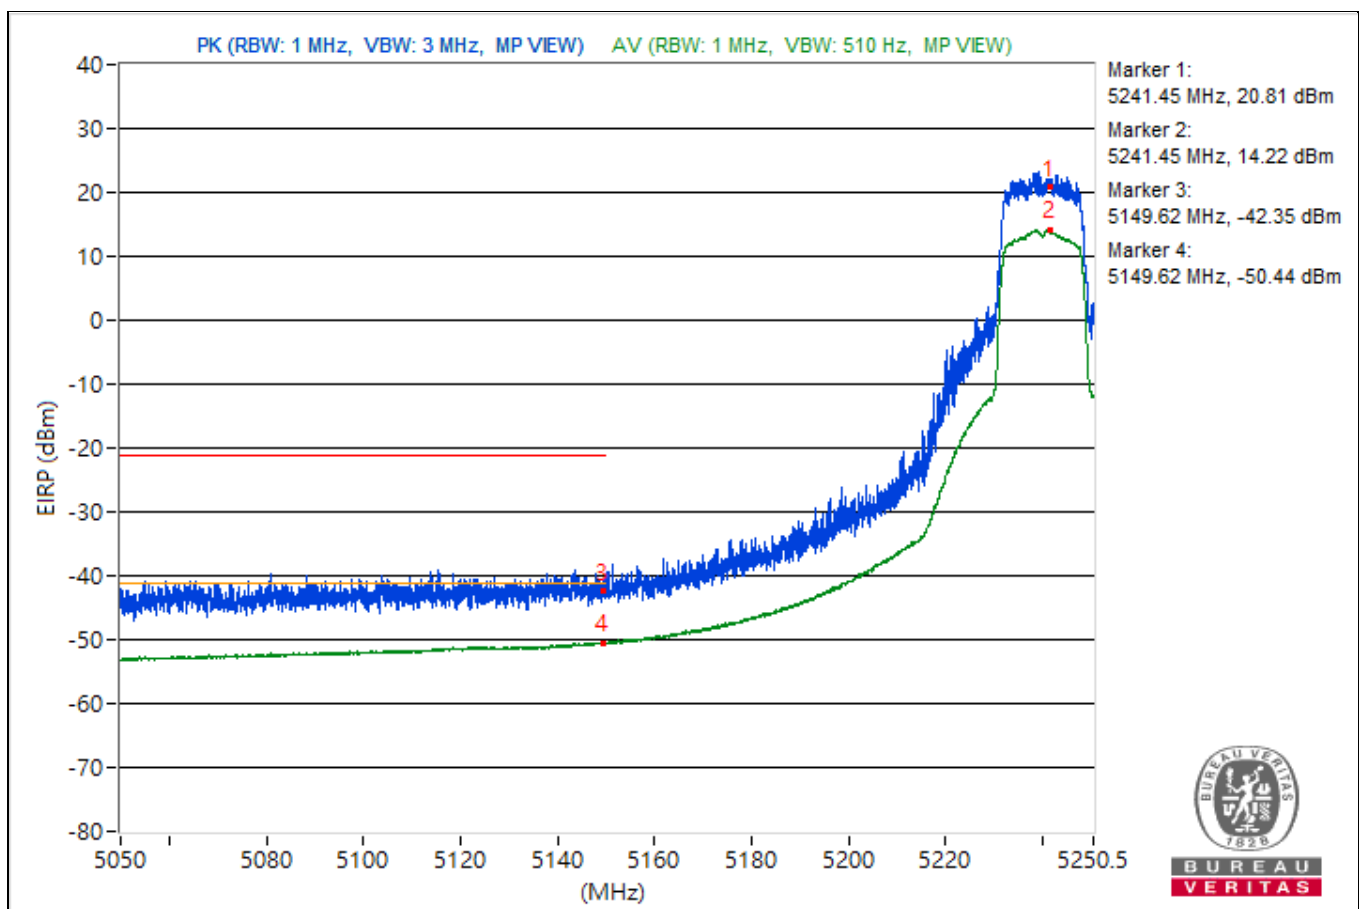


RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5258.82	118.78 PK			18.6	4.92	23.52
2	*5258.82	110.06 AV			9.88	4.92	14.8
3	5359.3	54.93 PK	74	-19.07	-45.25	4.92	-40.33
4	5359.3	47.88 AV	54	-6.12	-52.3	4.92	-47.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

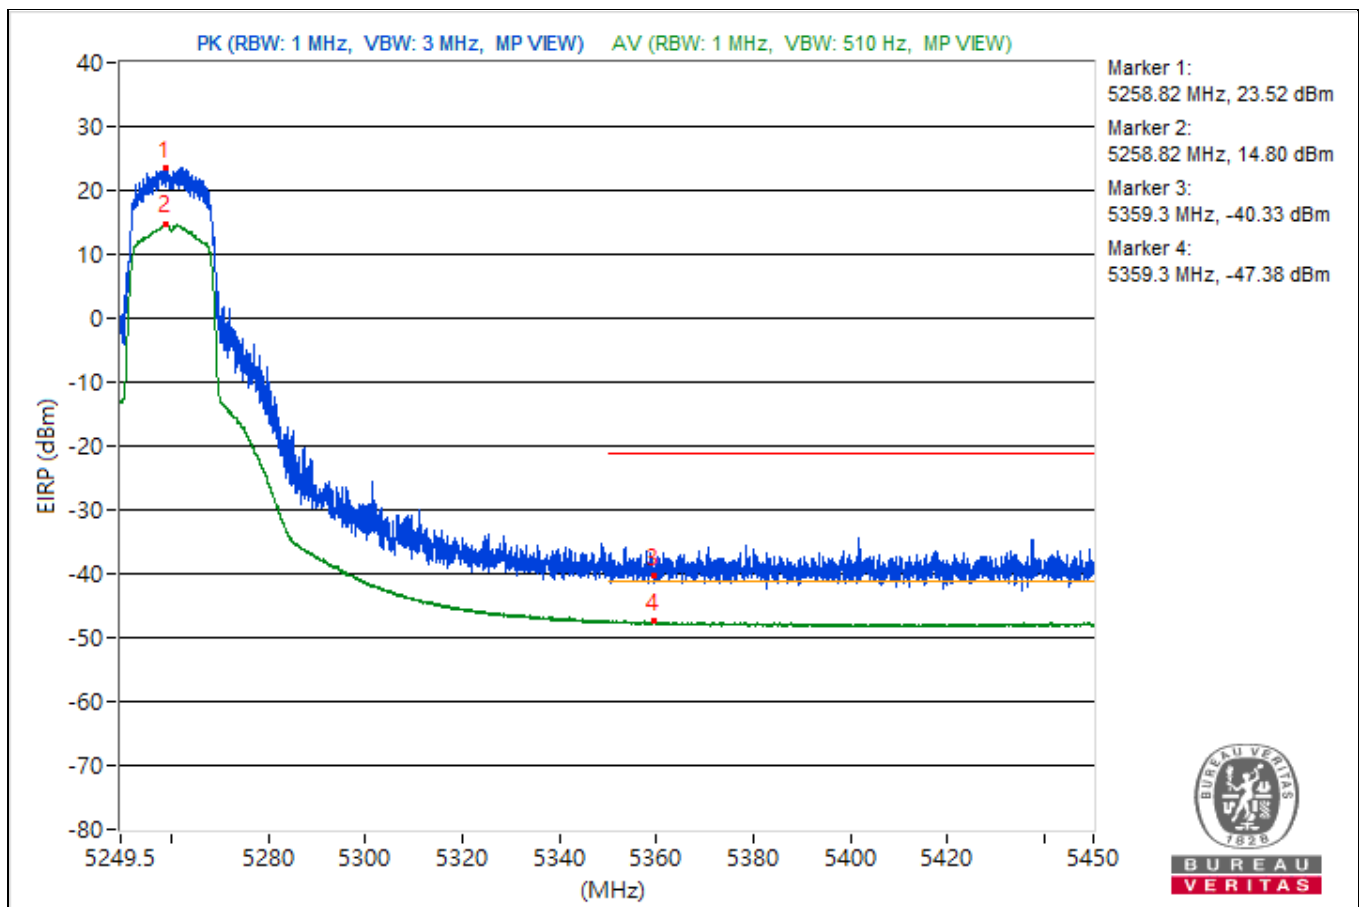


RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5300.95	117.69 PK			17.51	4.92	22.43
2	*5300.95	109.22 AV			9.04	4.92	13.96
3	5350.28	57.77 PK	74	-16.23	-42.41	4.92	-37.49
4	5350.28	49.33 AV	54	-4.67	-50.85	4.92	-45.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

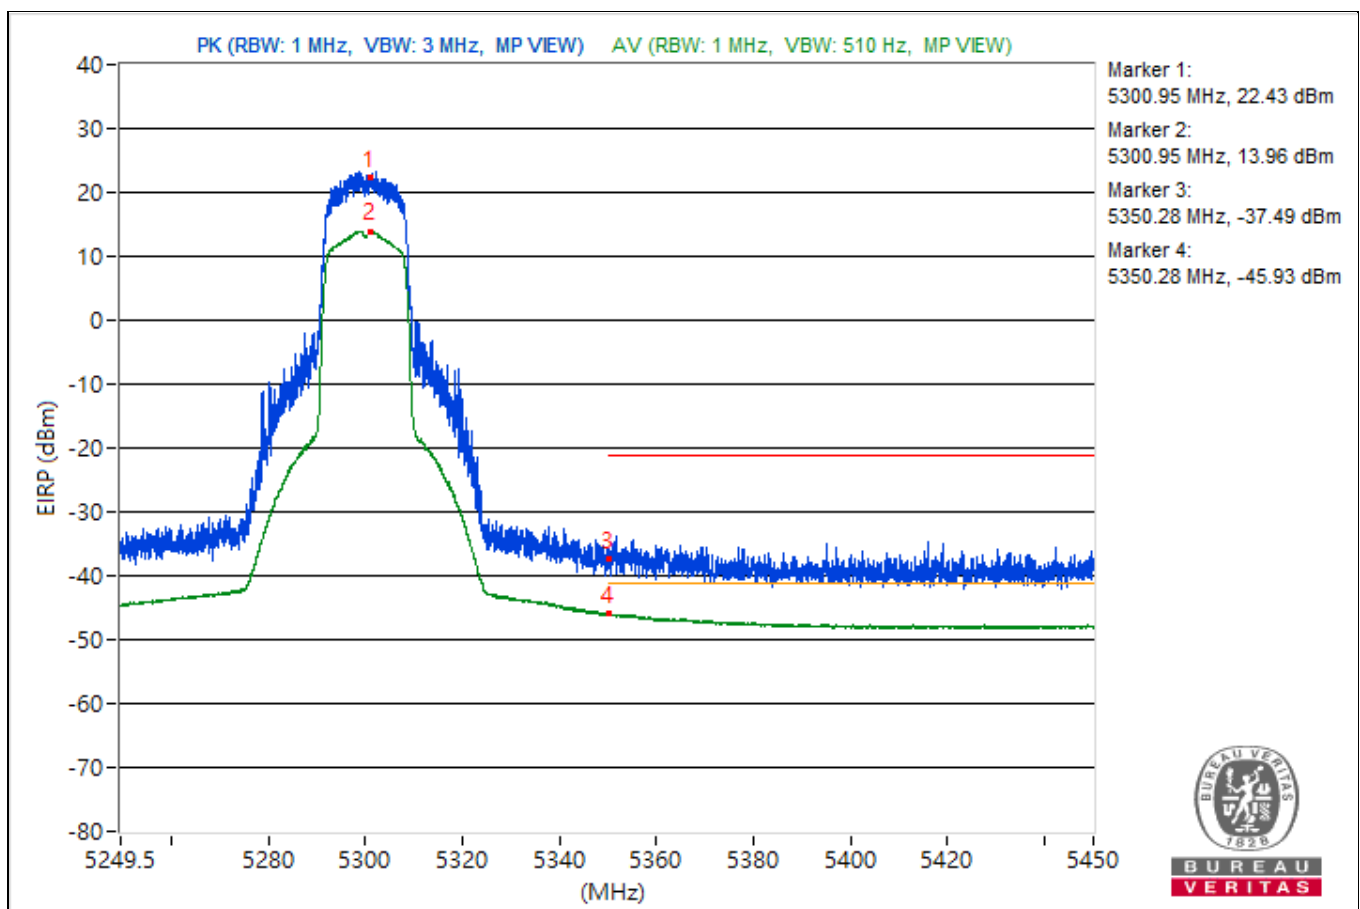


RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5321.15	118.37 PK			18.19	4.92	23.11
2	*5321.15	109.64 AV			9.46	4.92	14.38
3	5350.05	60.25 PK	74	-13.75	-39.93	4.92	-35.01
4	5350.05	52.12 AV	54	-1.88	-48.06	4.92	-43.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

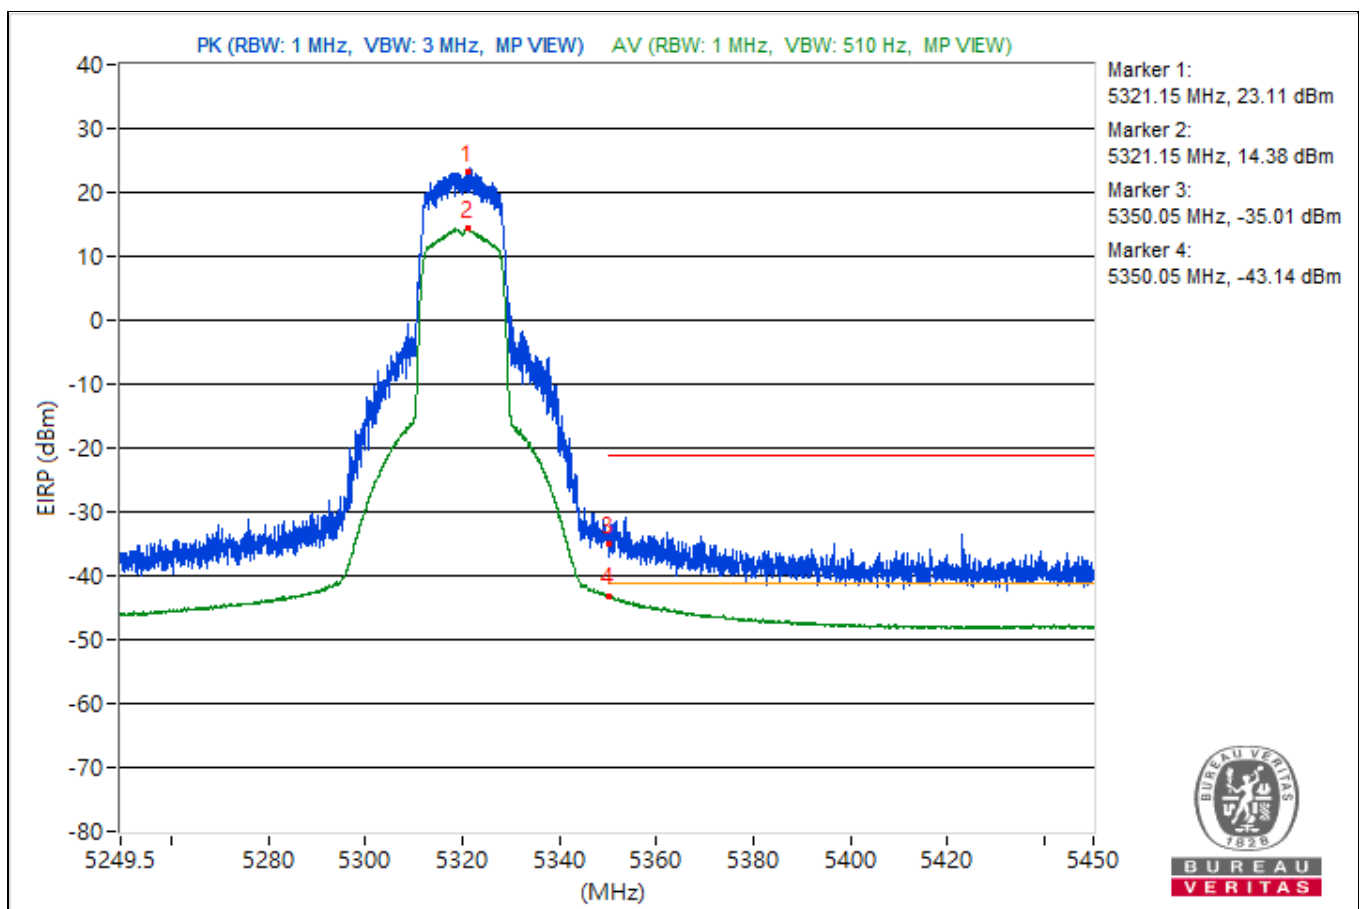


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5498.8	119.03 PK			18.85	4.92	23.77
2	*5498.88	109.62 AV			9.44	4.92	14.36
3	5459.38	63.65 PK	74	-10.35	-36.53	4.92	-31.61
4	5459.53	51.64 AV	54	-2.36	-48.54	4.92	-43.62
5	#5467.16	65.48 PK	68.26	-2.78	-34.7	4.92	-29.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

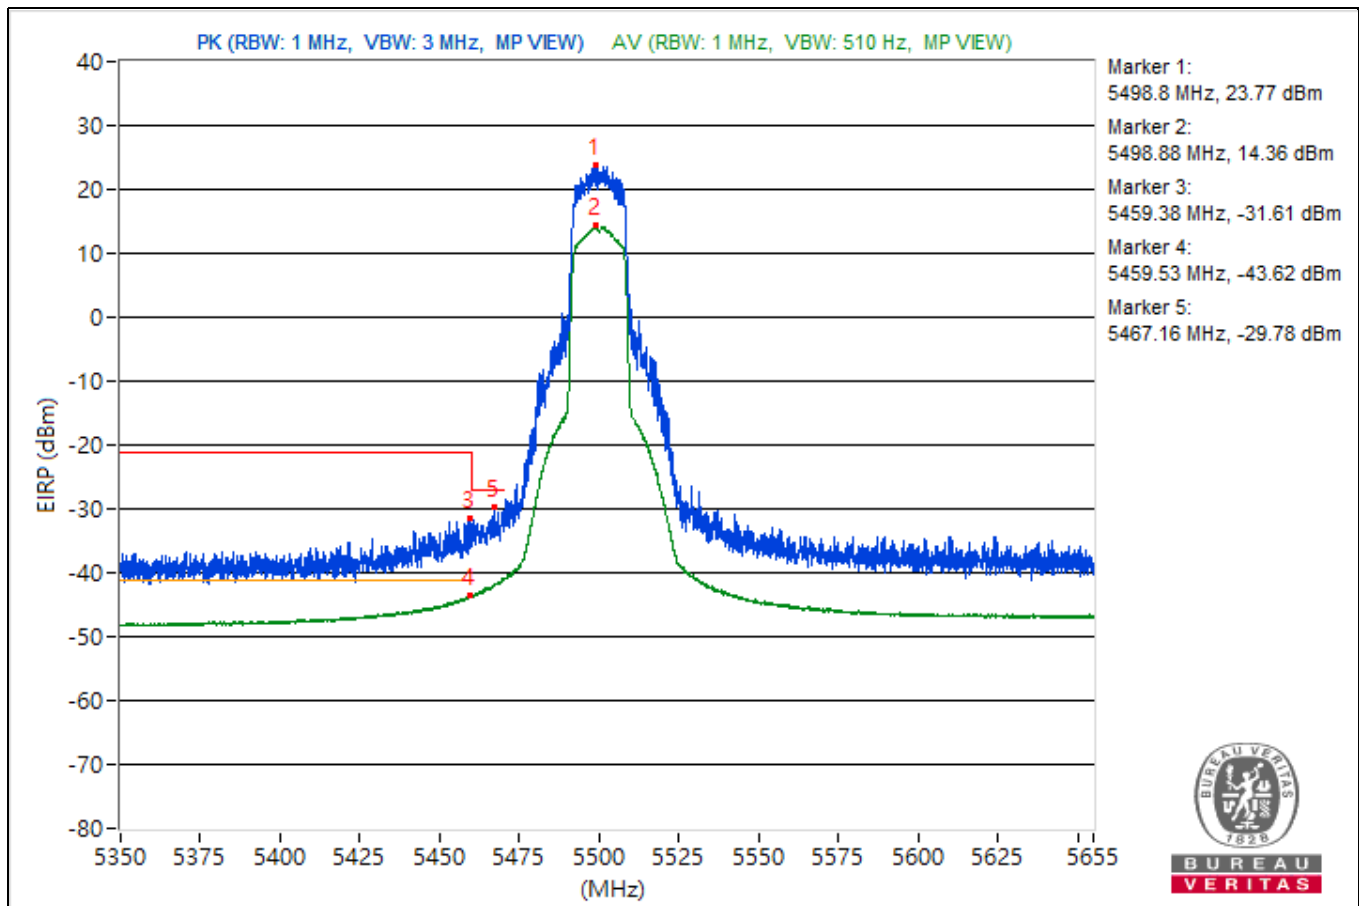


RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5583.59	120.08 PK			19.9	4.92	24.82
2	*5578.71	109.75 AV			9.57	4.92	14.49
3	5431.82	59.57 PK	74	-14.43	-40.61	4.92	-35.69
4	5457.89	48.03 AV	54	-5.97	-52.15	4.92	-47.23
5	#5465.98	58.9 PK	68.26	-9.36	-41.28	4.92	-36.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

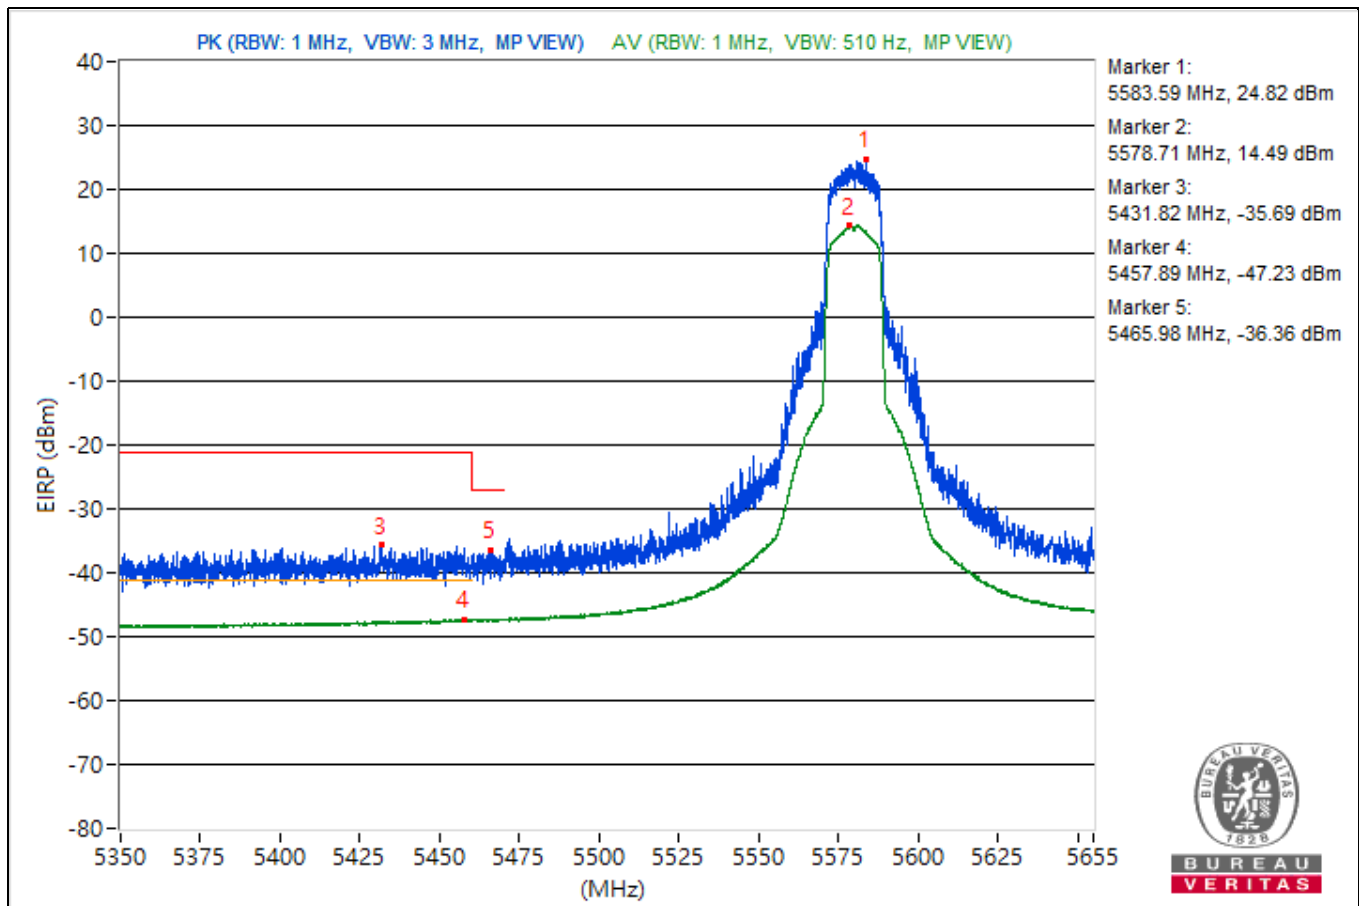


RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5701.25	118.68			18.5	4.92	23.42
2	#5725.21	63.22	68.26	-5.04	-36.96	4.92	-32.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

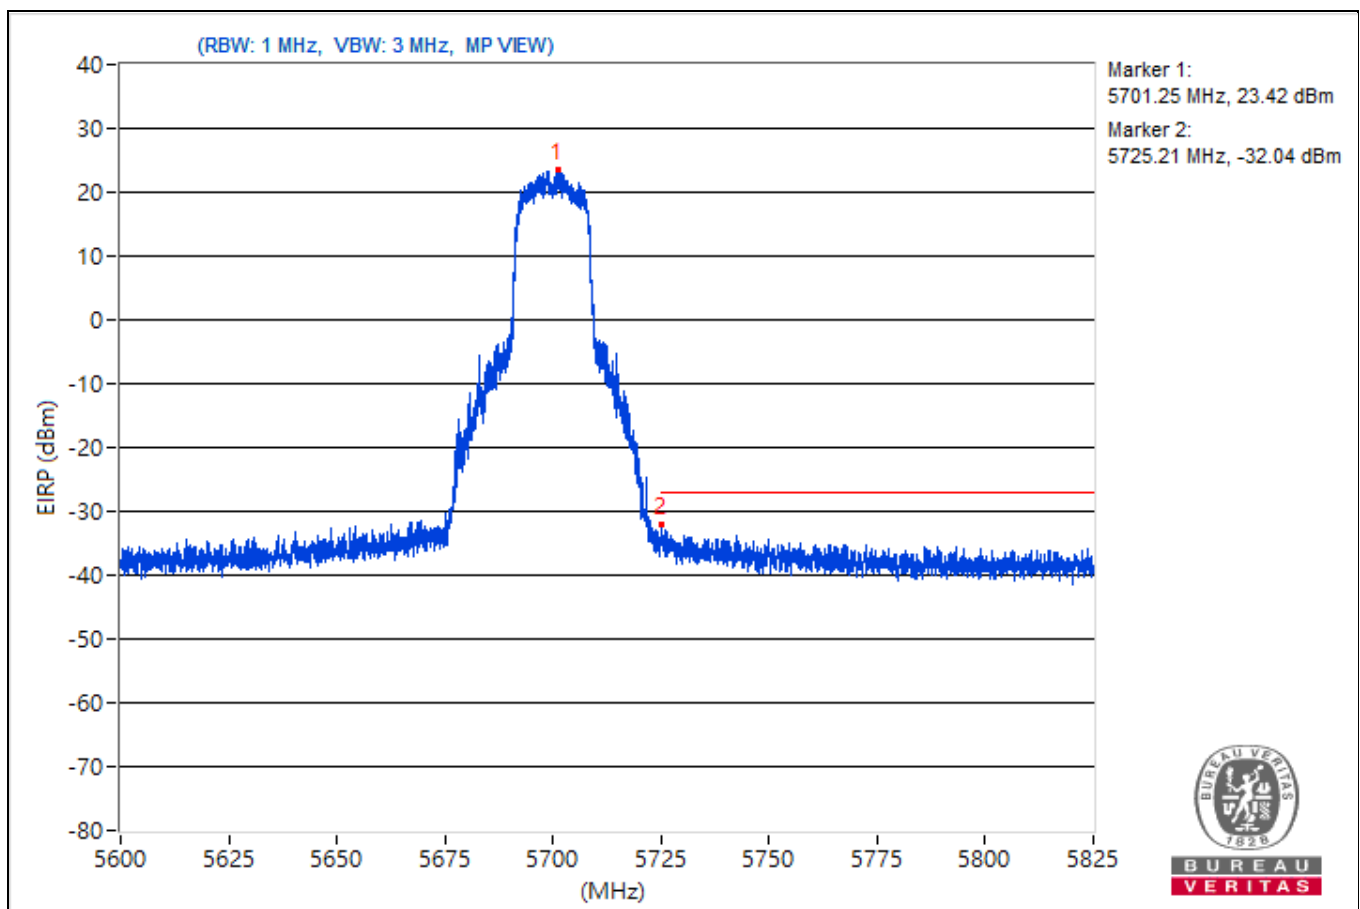


RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5720.84	119.36			19.18	4.92	24.1
2	#5959.57	60.35	68.26	-7.91	-39.83	4.92	-34.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

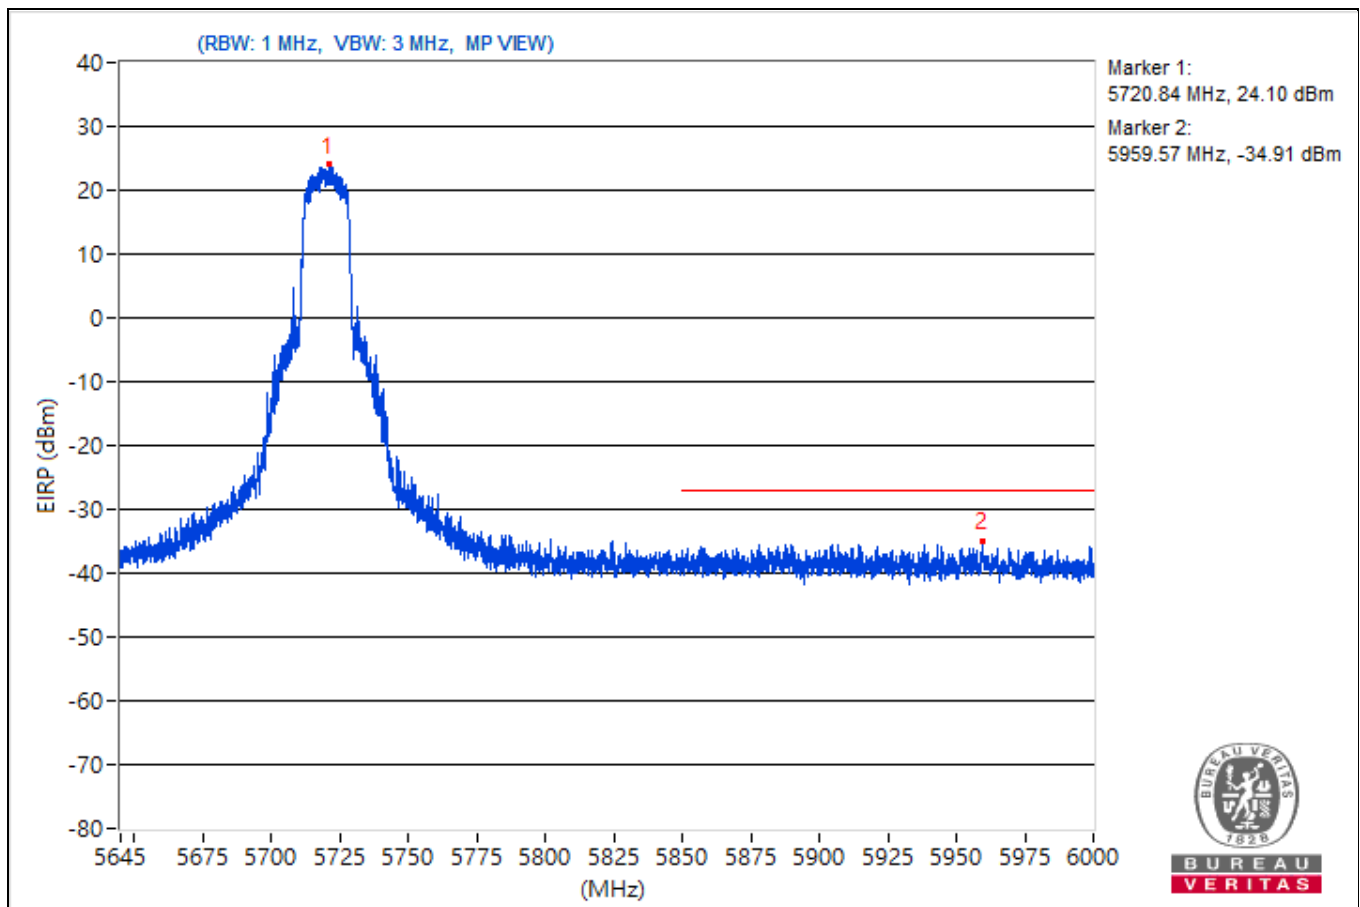


RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5746.18	118.89			18.71	4.92	23.63
2	#5610.21	59.33	68.26	-8.93	-40.85	4.92	-35.93
3	#5651.29	57.65	69.22	-11.57	-42.53	4.92	-37.61
4	#5715.89	68.67	109.71	-41.04	-31.51	4.92	-26.59
5	#5720.29	69.9	111.52	-41.62	-30.28	4.92	-25.36
6	#5854.83	57.68	111.24	-53.56	-42.5	4.92	-37.58
7	#5871.1	59.24	106.35	-47.11	-40.94	4.92	-36.02
8	#5924.66	58.38	68.51	-10.13	-41.8	4.92	-36.88
9	#5928.81	59.81	68.26	-8.45	-40.37	4.92	-35.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

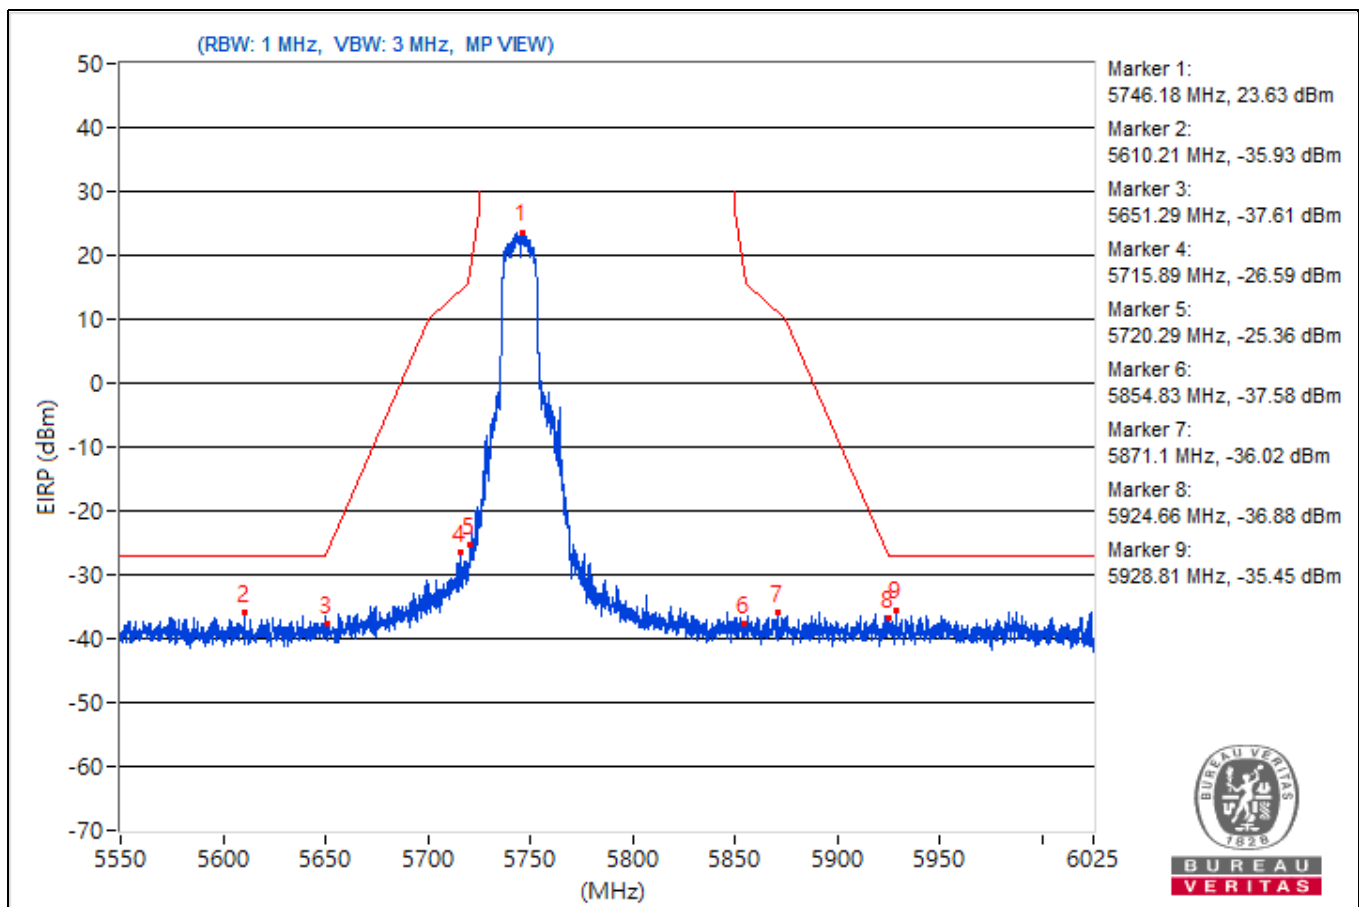


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5784.41	119.17			18.99	4.92	23.91
2	#5642.27	54.84	68.26	-13.42	-45.34	4.92	-40.42
3	#5650.34	52.48	68.51	-16.03	-47.7	4.92	-42.78
4	#5719.22	61.77	110.64	-48.87	-38.41	4.92	-33.49
5	#5720.17	58.02	111.24	-53.22	-42.16	4.92	-37.24
6	#5854.59	55.44	111.79	-56.35	-44.74	4.92	-39.82
7	#5873.12	54.73	105.79	-51.06	-45.45	4.92	-40.53
8	#5924.66	51.03	68.51	-17.48	-49.15	4.92	-44.23
9	#5993.29	52.8	68.26	-15.46	-47.38	4.92	-42.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

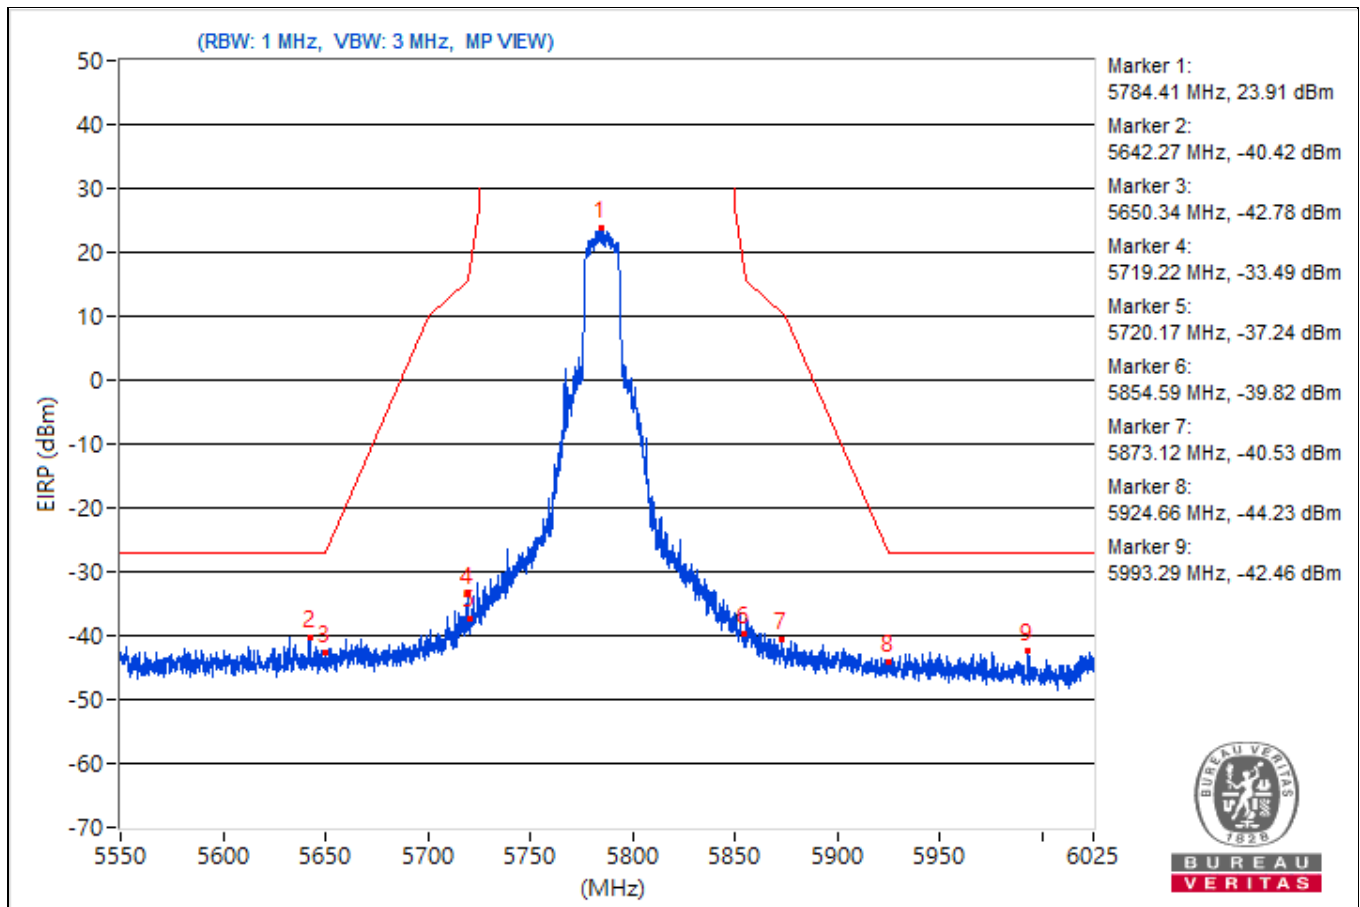


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5823.12	118.79			18.61	4.92	23.53
2	#5645.24	54.66	68.26	-13.6	-45.52	4.92	-40.6
3	#5650.46	51.12	68.6	-17.48	-49.06	4.92	-44.14
4	#5703.07	54.05	106.12	-52.07	-46.13	4.92	-41.21
5	#5720.17	53.02	111.24	-58.22	-47.16	4.92	-42.24
6	#5854.36	70.07	112.33	-42.26	-30.11	4.92	-25.19
7	#5855.78	72.64	110.64	-38	-27.54	4.92	-22.62
8	#5924.77	51.31	68.43	-17.12	-48.87	4.92	-43.95
9	#5945.2	53.33	68.26	-14.93	-46.85	4.92	-41.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

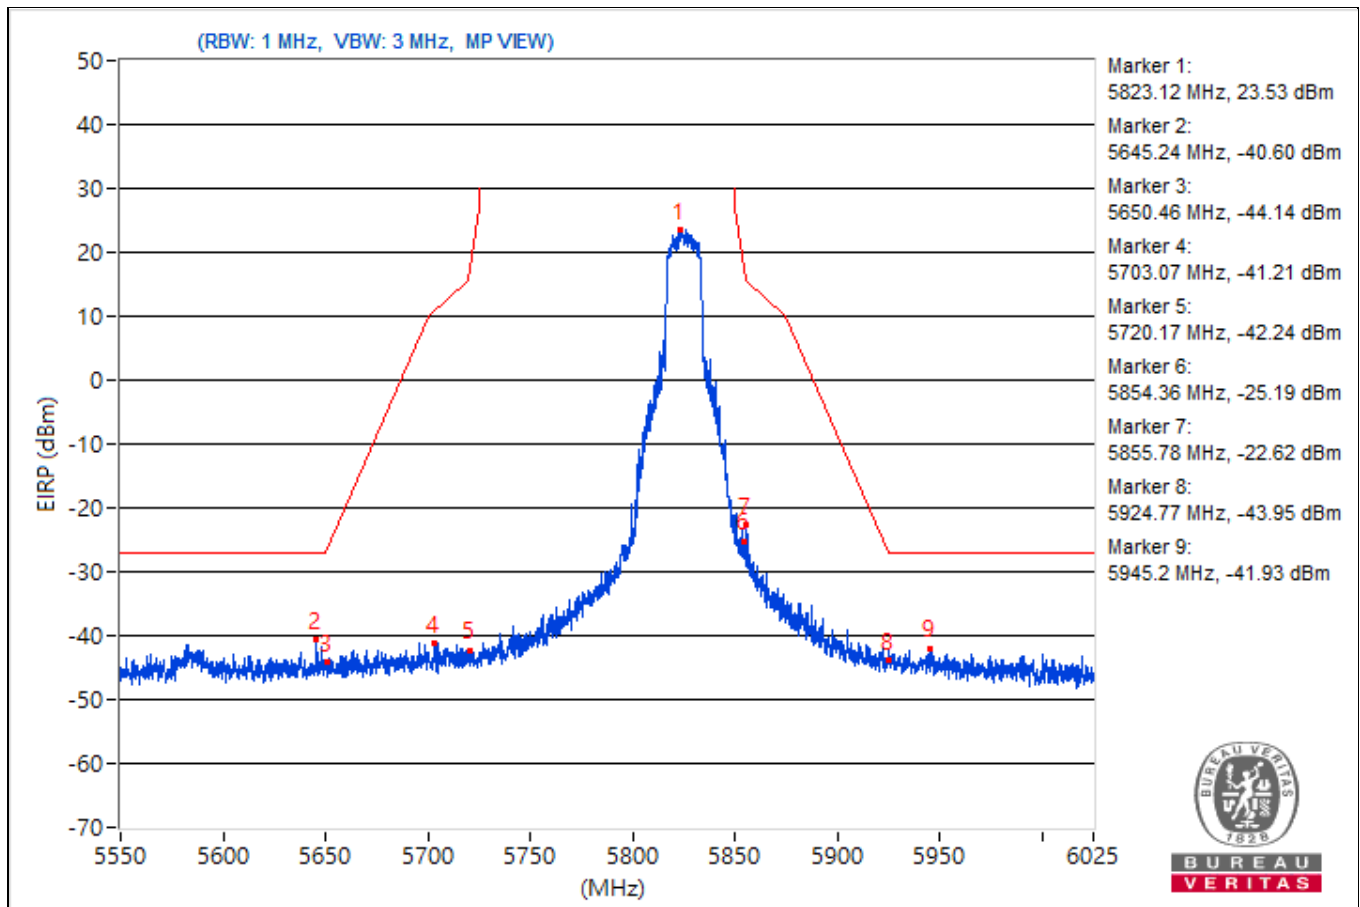


RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5178.97	116.57 PK			16.39	4.92	21.31
2	*5178.97	107.85 AV			7.67	4.92	12.59
3	5149.8	62.83 PK	74	-11.17	-37.35	4.92	-32.43
4	5149.8	51.88 AV	54	-2.12	-48.3	4.92	-43.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

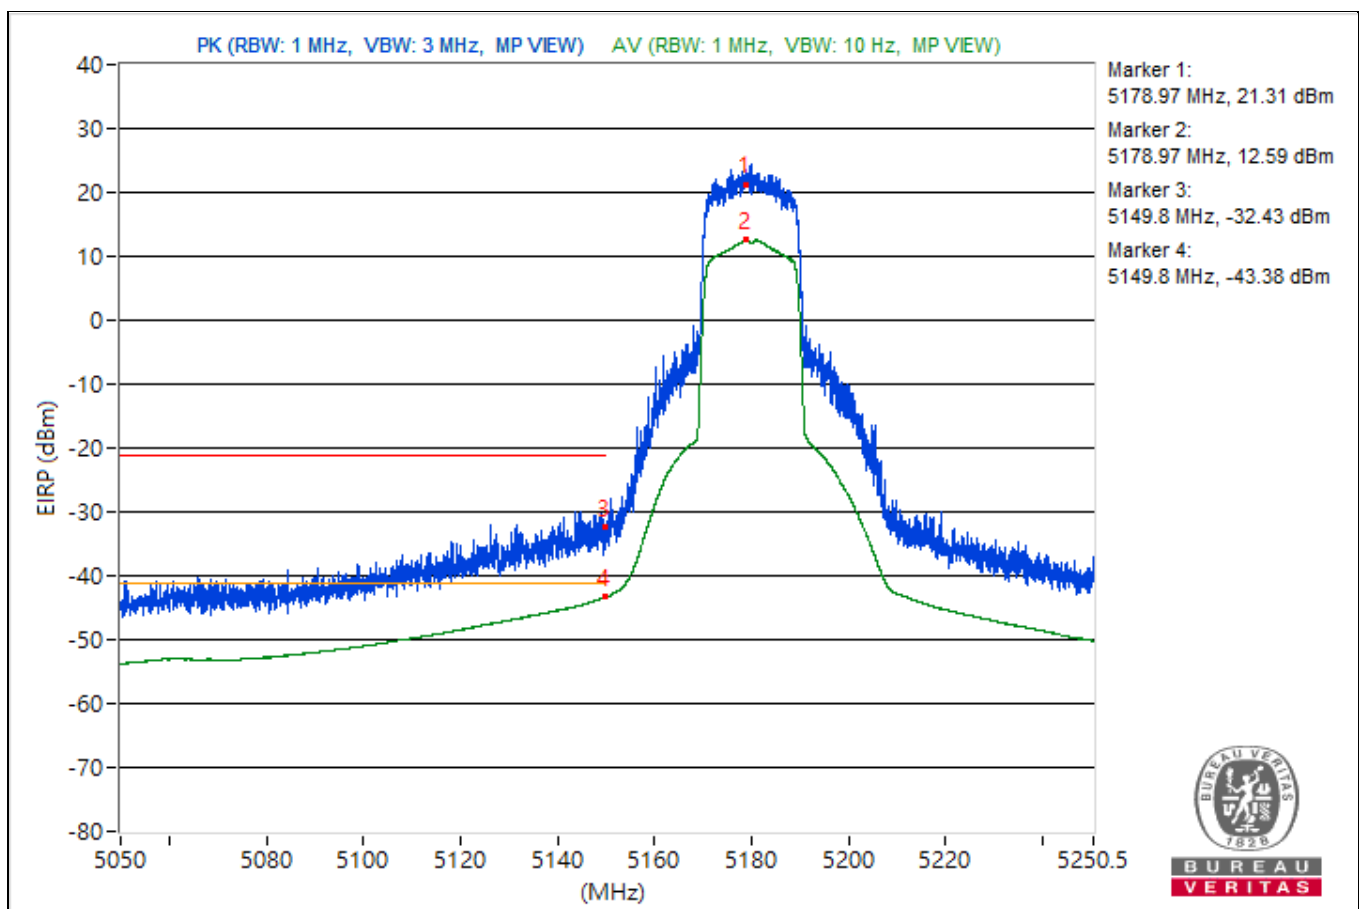


RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5198.95	118.47 PK			18.29	4.92	23.21
2	*5198.95	107.95 AV			7.77	4.92	12.69
3	5150	58.74 PK	74	-15.26	-41.44	4.92	-36.52
4	5150	49.03 AV	54	-4.97	-51.15	4.92	-46.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

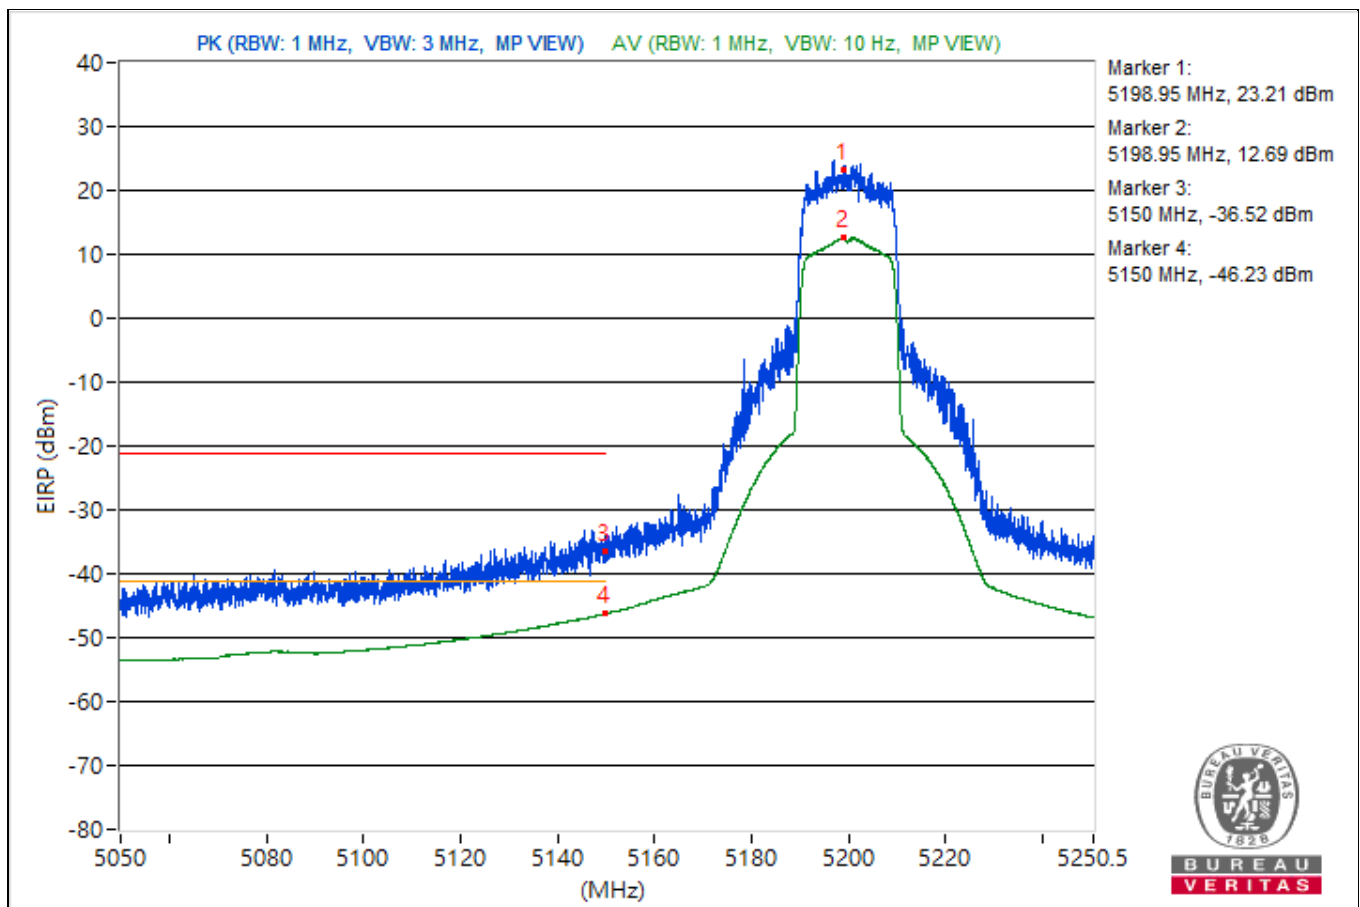


RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5238.95	117.11 PK			16.93	4.92	21.85
2	*5238.95	107.72 AV			7.54	4.92	12.46
3	5149.92	53.09 PK	74	-20.91	-47.09	4.92	-42.17
4	5149.92	44.24 AV	54	-9.76	-55.94	4.92	-51.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

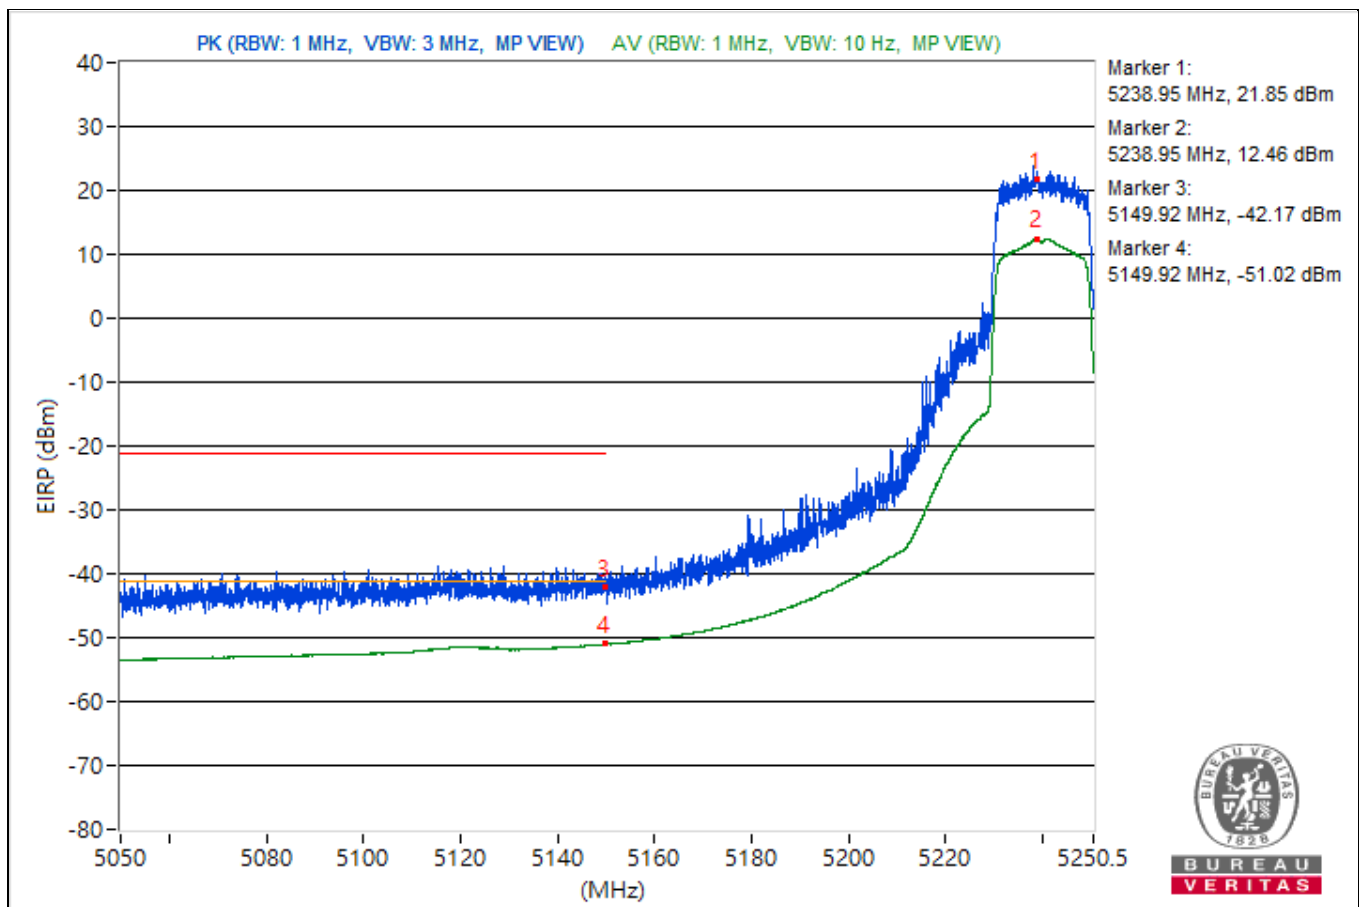


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5260.88	117.74 PK			17.56	4.92	22.48
2	*5260.88	108.46 AV			8.28	4.92	13.2
3	5351.33	57.19 PK	74	-16.81	-42.99	4.92	-38.07
4	5351.33	47.31 AV	54	-6.69	-52.87	4.92	-47.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

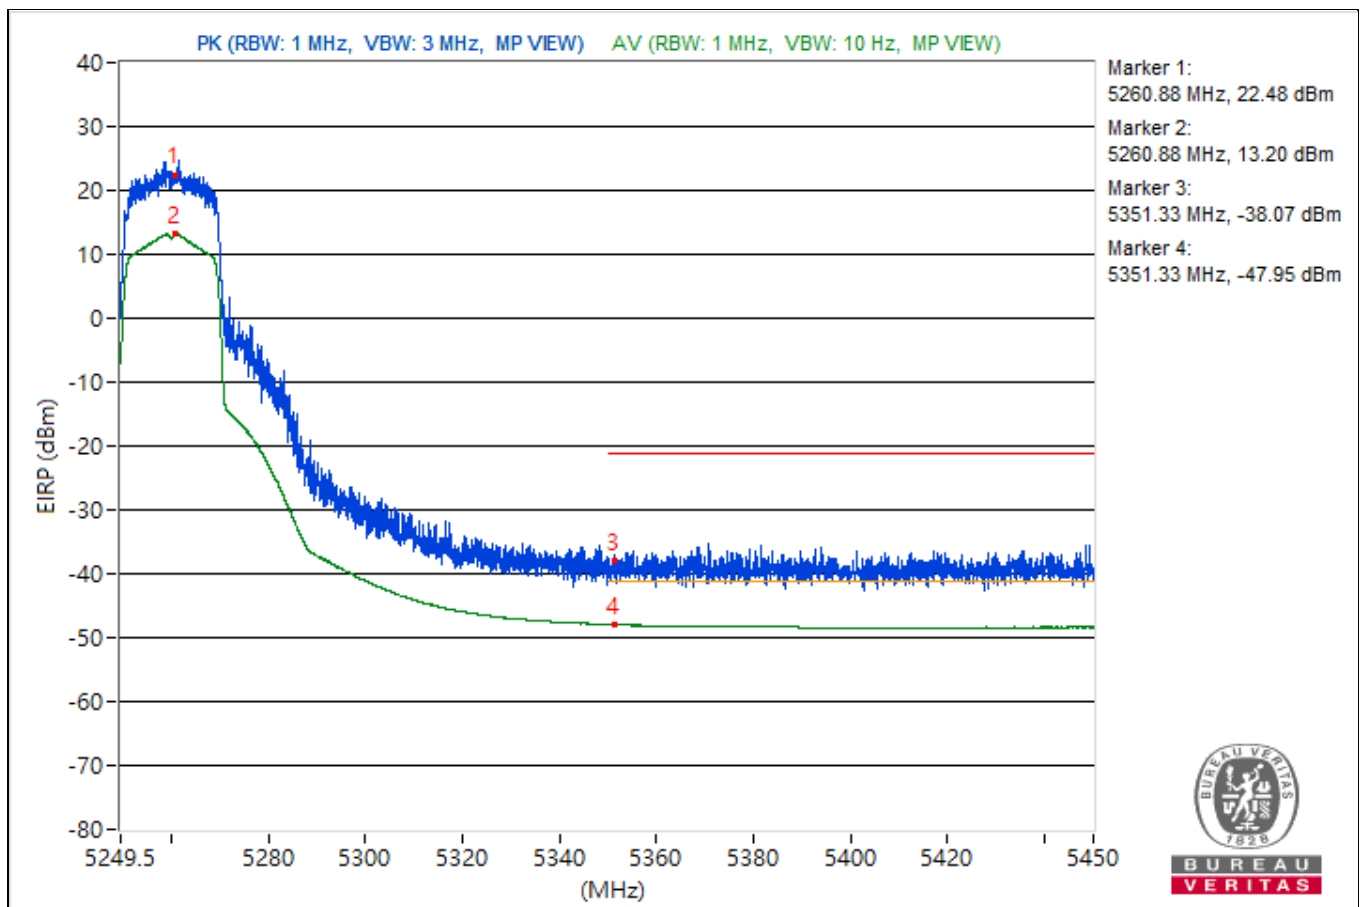


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5299.02	117.66 PK			17.48	4.92	22.4
2	*5299.02	108.47 AV			8.29	4.92	13.21
3	5350	59.87 PK	74	-14.13	-40.31	4.92	-35.39
4	5350	49.54 AV	54	-4.46	-50.64	4.92	-45.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

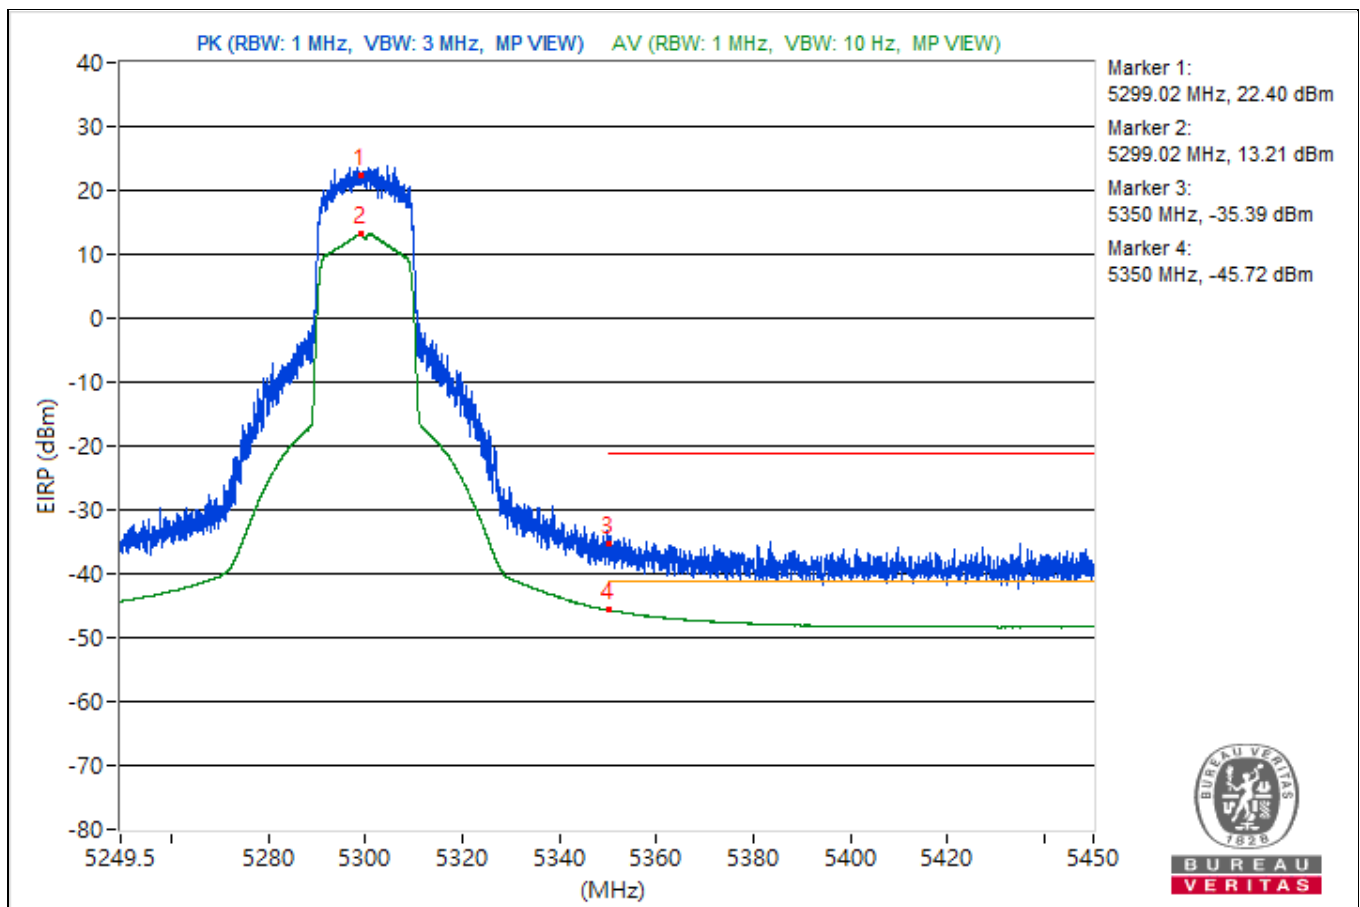


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5318.92	117.15 PK			16.97	4.92	21.89
2	*5318.92	108.27 AV			8.09	4.92	13.01
3	5350	62.17 PK	74	-11.83	-38.01	4.92	-33.09
4	5350	53.03 AV	54	-0.97	-47.15	4.92	-42.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

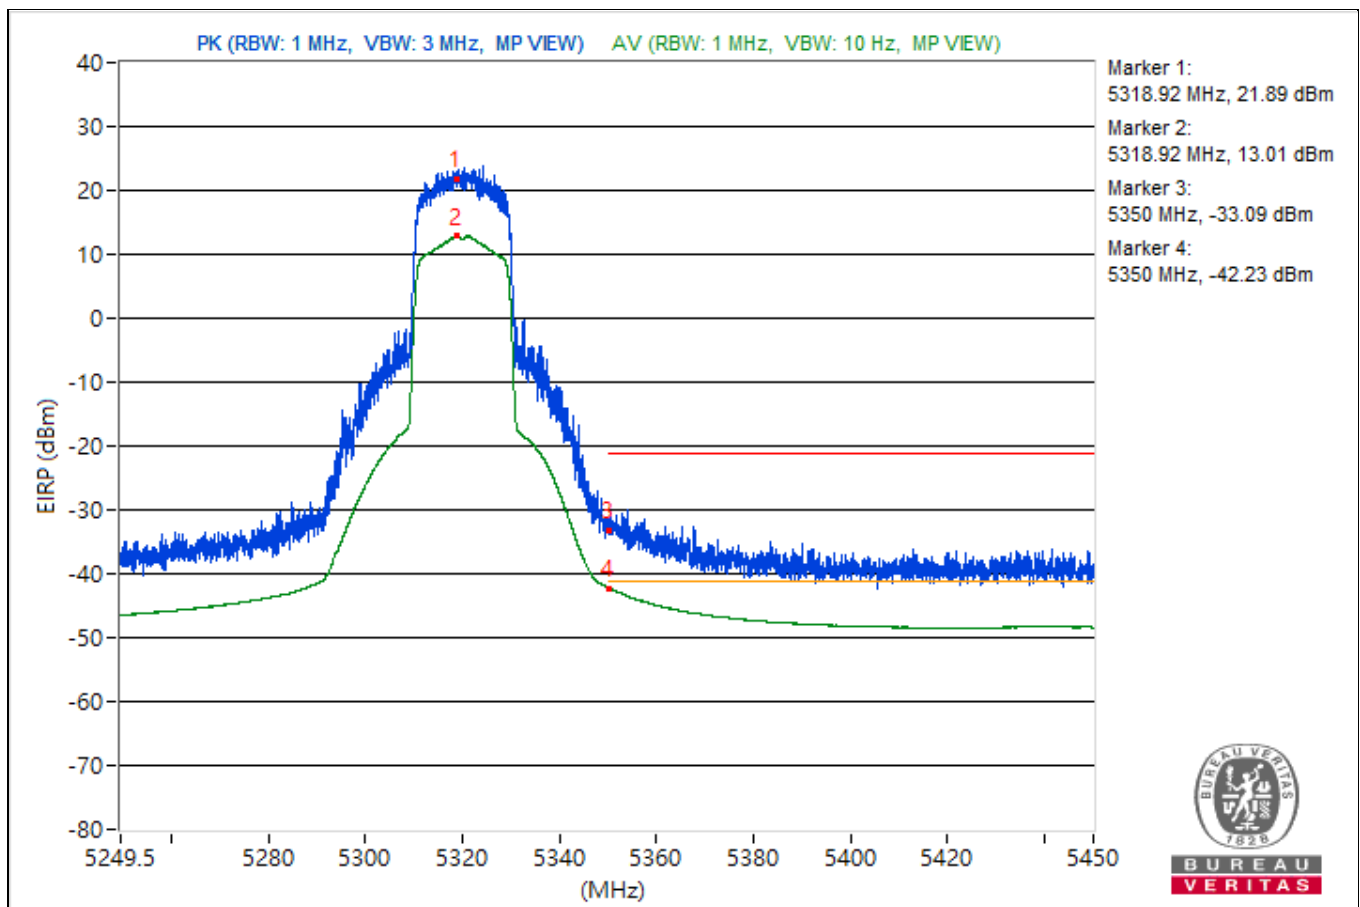


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5505.32	120.48 PK			20.3	4.92	25.22
2	*5498.92	108.18 AV			8	4.92	12.92
3	5457.86	64.41 PK	74	-9.59	-35.77	4.92	-30.85
4	5459.95	51.97 AV	54	-2.03	-48.21	4.92	-43.29
5	#5465.9	67.51 PK	68.26	-0.75	-32.67	4.92	-27.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

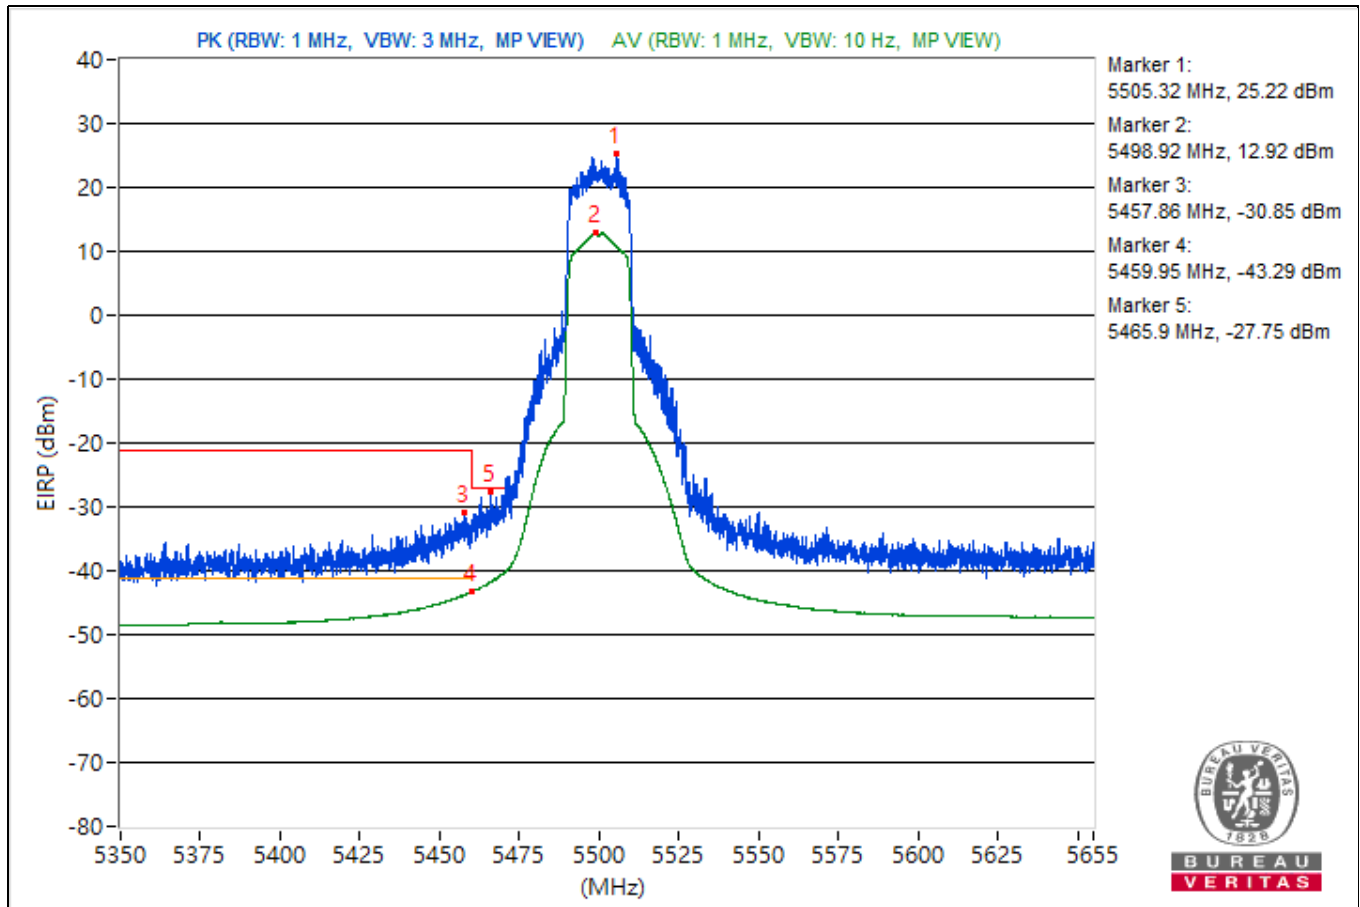


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5580.77	120.36 PK			20.18	4.92	25.1
2	*5579.02	108.59 AV			8.41	4.92	13.33
3	5449.01	59.48 PK	74	-14.52	-40.7	4.92	-35.78
4	5459.19	47.67 AV	54	-6.33	-52.51	4.92	-47.59
5	#5469.41	59.8 PK	68.26	-8.46	-40.38	4.92	-35.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

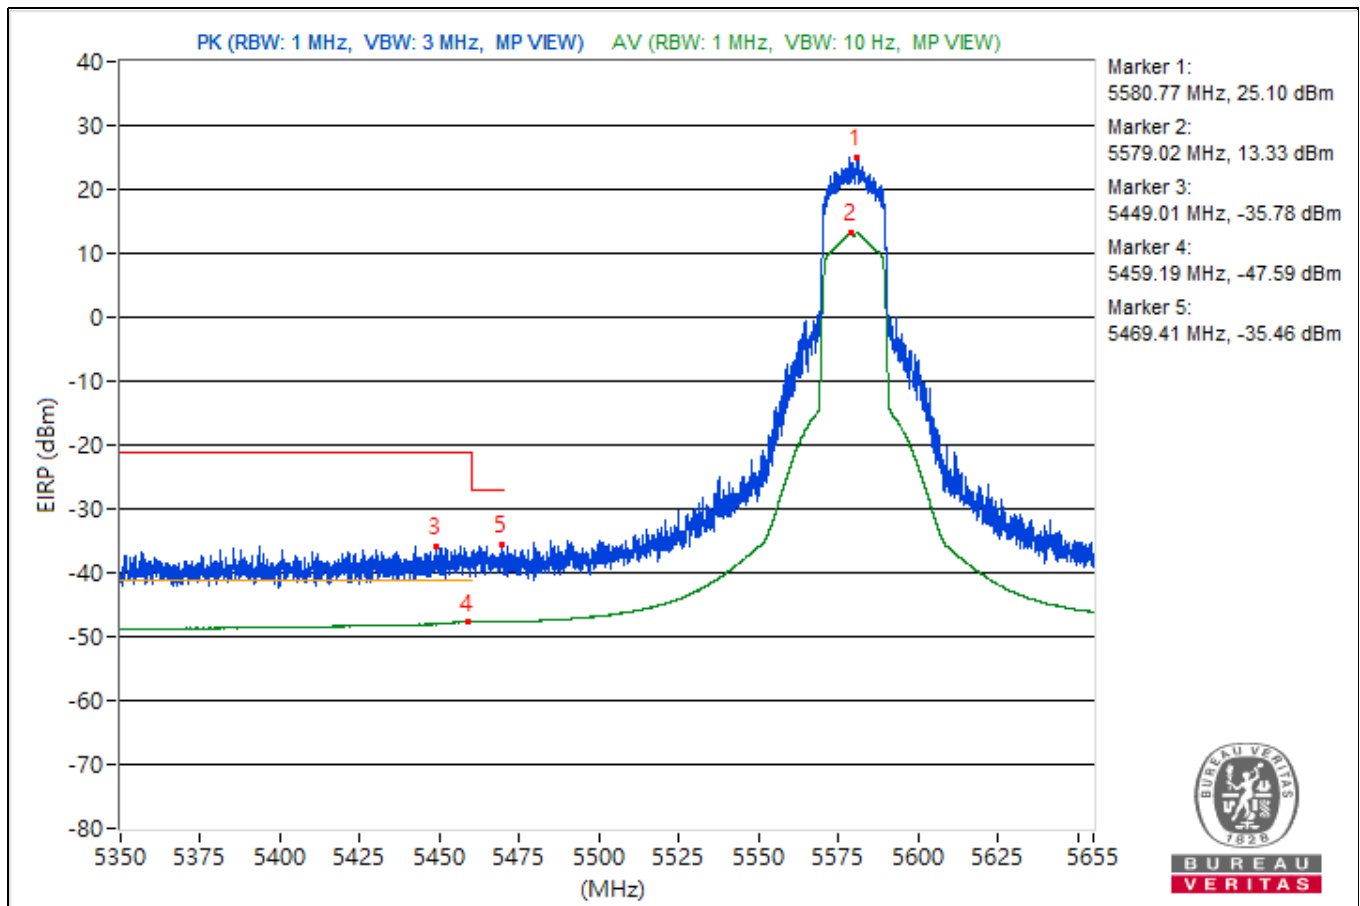


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5701.62	118.07			17.89	4.92	22.81
2	#5725.07	67.94	68.26	-0.32	-32.24	4.92	-27.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

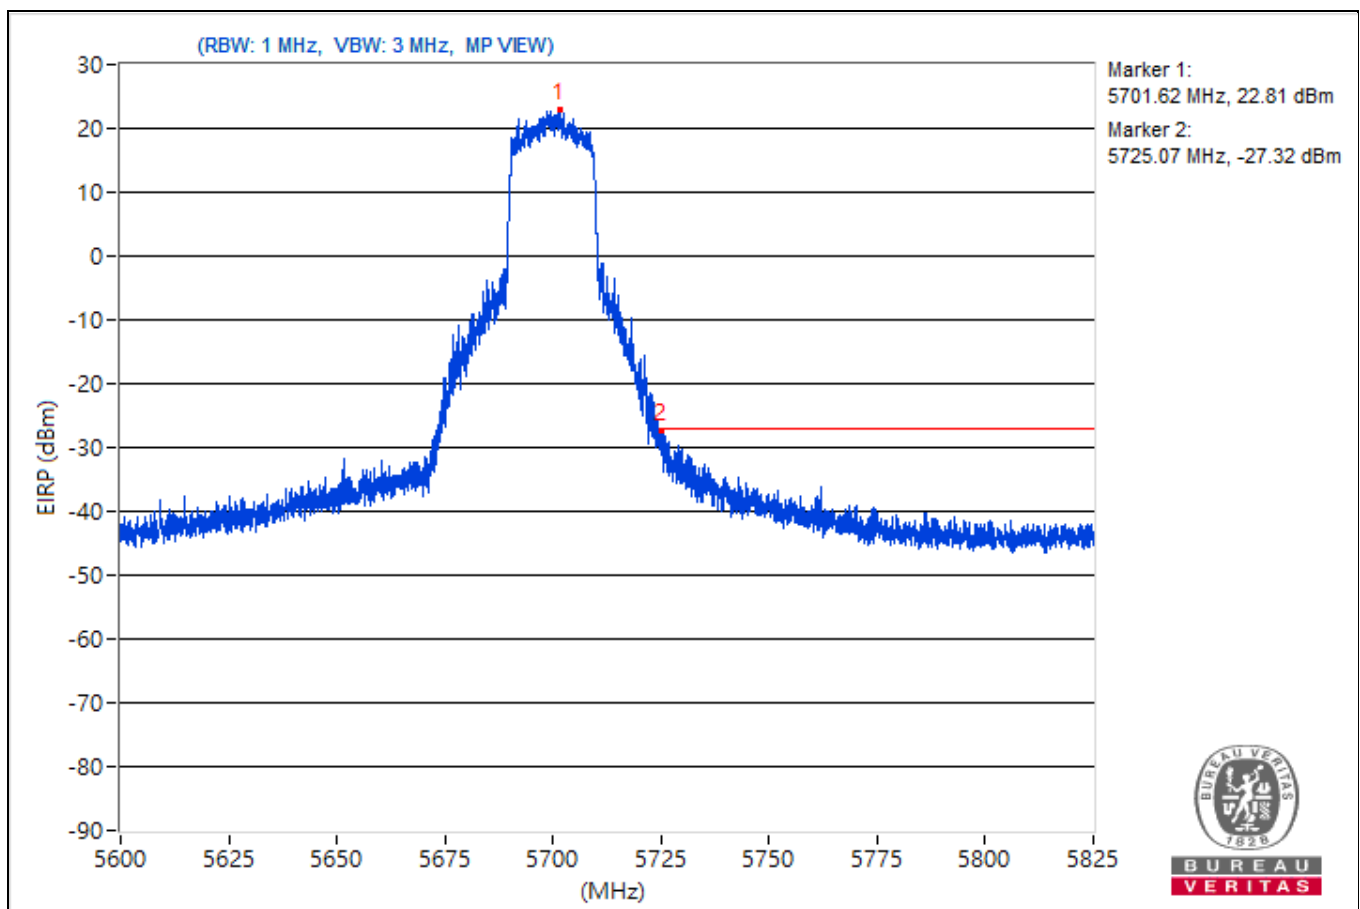


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5718.22	121.66			21.48	4.92	26.4
2	#5855.03	60.68	68.26	-7.58	-39.5	4.92	-34.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

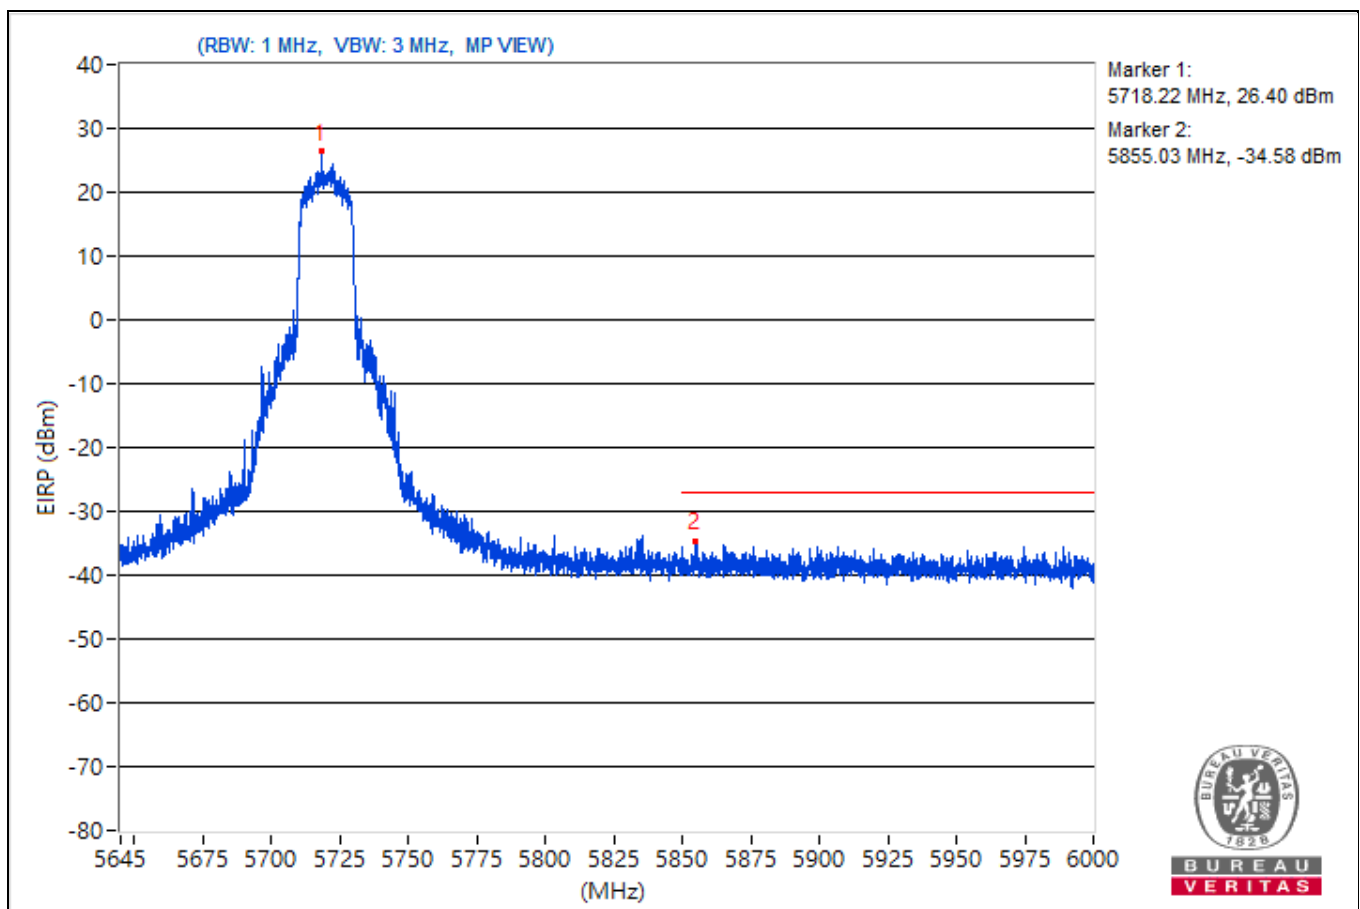


RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5743.44	120.34			20.16	4.92	25.08
2	#5633.36	54.59	68.26	-13.67	-45.59	4.92	-40.67
3	#5650.34	53.34	68.51	-15.17	-46.84	4.92	-41.92
4	#5719.69	78.67	110.77	-32.1	-21.51	4.92	-16.59
5	#5720.52	78.71	112.06	-33.35	-21.47	4.92	-16.55
6	#5854.24	52.46	112.6	-60.14	-47.72	4.92	-42.8
7	#5871.93	53.32	106.12	-52.8	-46.86	4.92	-41.94
8	#5923.23	51.37	69.57	-18.2	-48.81	4.92	-43.89
9	#5984.51	52.79	68.26	-15.47	-47.39	4.92	-42.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

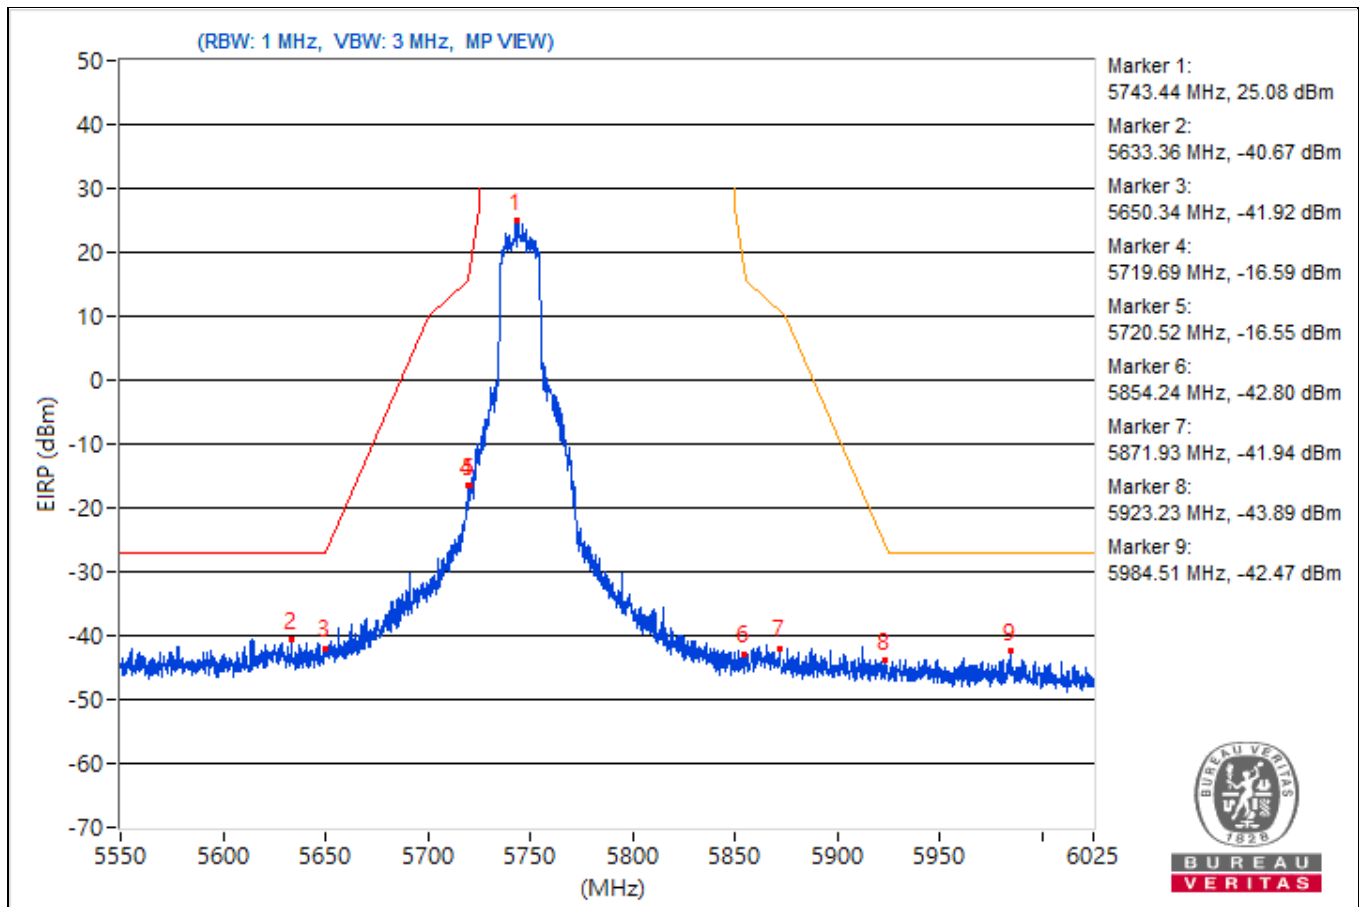


RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5780.97	119.32			19.14	4.92	24.06
2	#5610.56	53.65	68.26	-14.61	-46.53	4.92	-41.61
3	#5650.34	52.28	68.51	-16.23	-47.9	4.92	-42.98
4	#5717.2	60.7	110.08	-49.38	-39.48	4.92	-34.56
5	#5720.29	59.93	111.52	-51.59	-40.25	4.92	-35.33
6	#5854.83	56.68	111.24	-54.56	-43.5	4.92	-38.58
7	#5866.47	57.46	107.65	-50.19	-42.72	4.92	-37.8
8	#5923.71	52.05	69.22	-17.17	-48.13	4.92	-43.21
9	#5944.73	52.52	68.26	-15.74	-47.66	4.92	-42.74

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

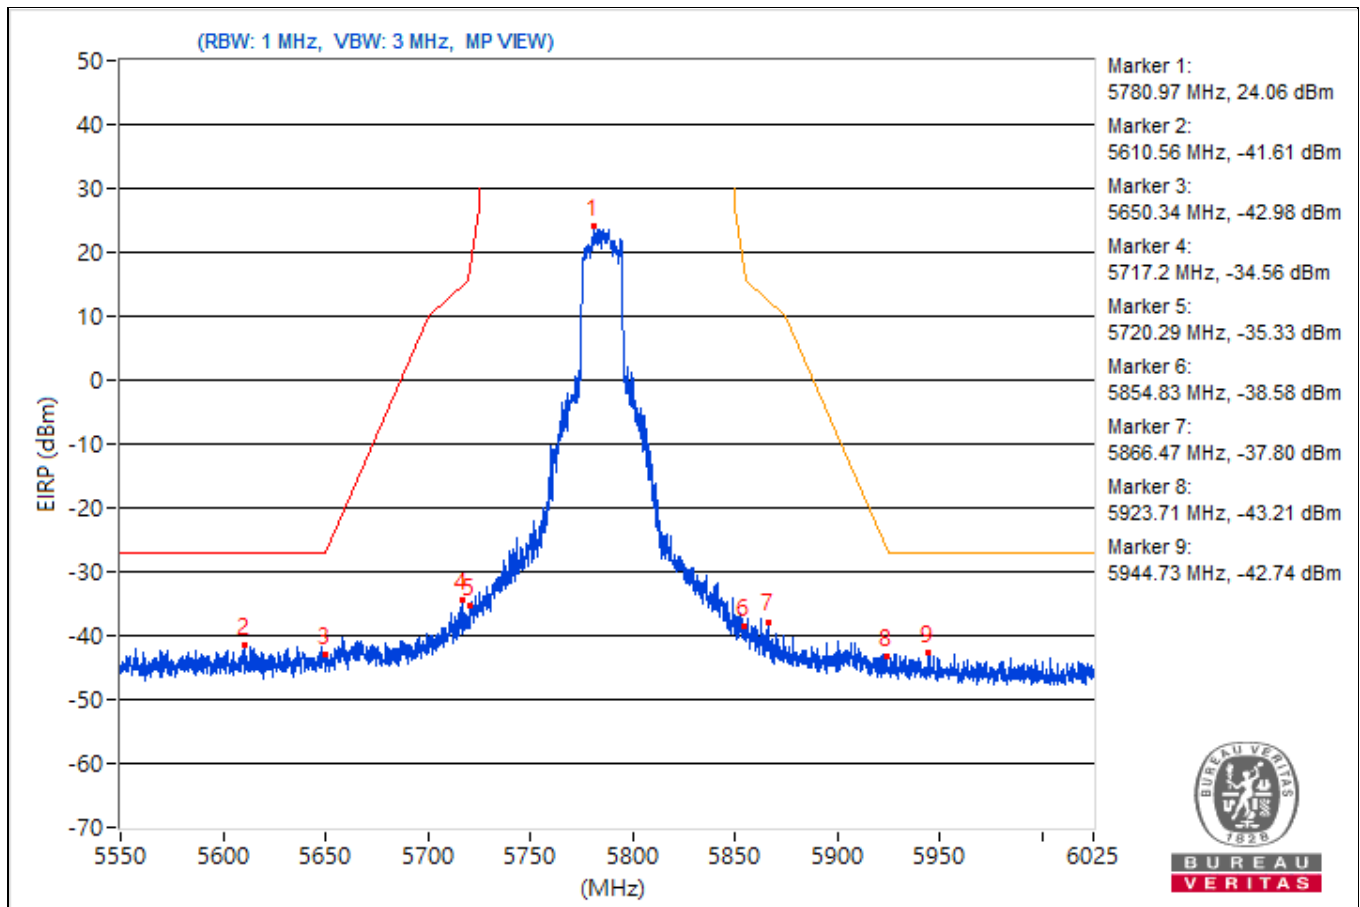


RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5824.07	118.29			18.11	4.92	23.03
2	#5589.9	52.9	68.26	-15.36	-47.28	4.92	-42.36
3	#5650.11	51.63	68.34	-16.71	-48.55	4.92	-43.63
4	#5701.05	53.39	105.55	-52.16	-46.79	4.92	-41.87
5	#5720.05	52.09	110.97	-58.88	-48.09	4.92	-43.17
6	#5854.12	71.27	112.87	-41.6	-28.91	4.92	-23.99
7	#5858.16	69.63	109.98	-40.35	-30.55	4.92	-25.63
8	#5922.64	53.55	70.01	-16.46	-46.63	4.92	-41.71
9	#5944.13	54.43	68.26	-13.83	-45.75	4.92	-40.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

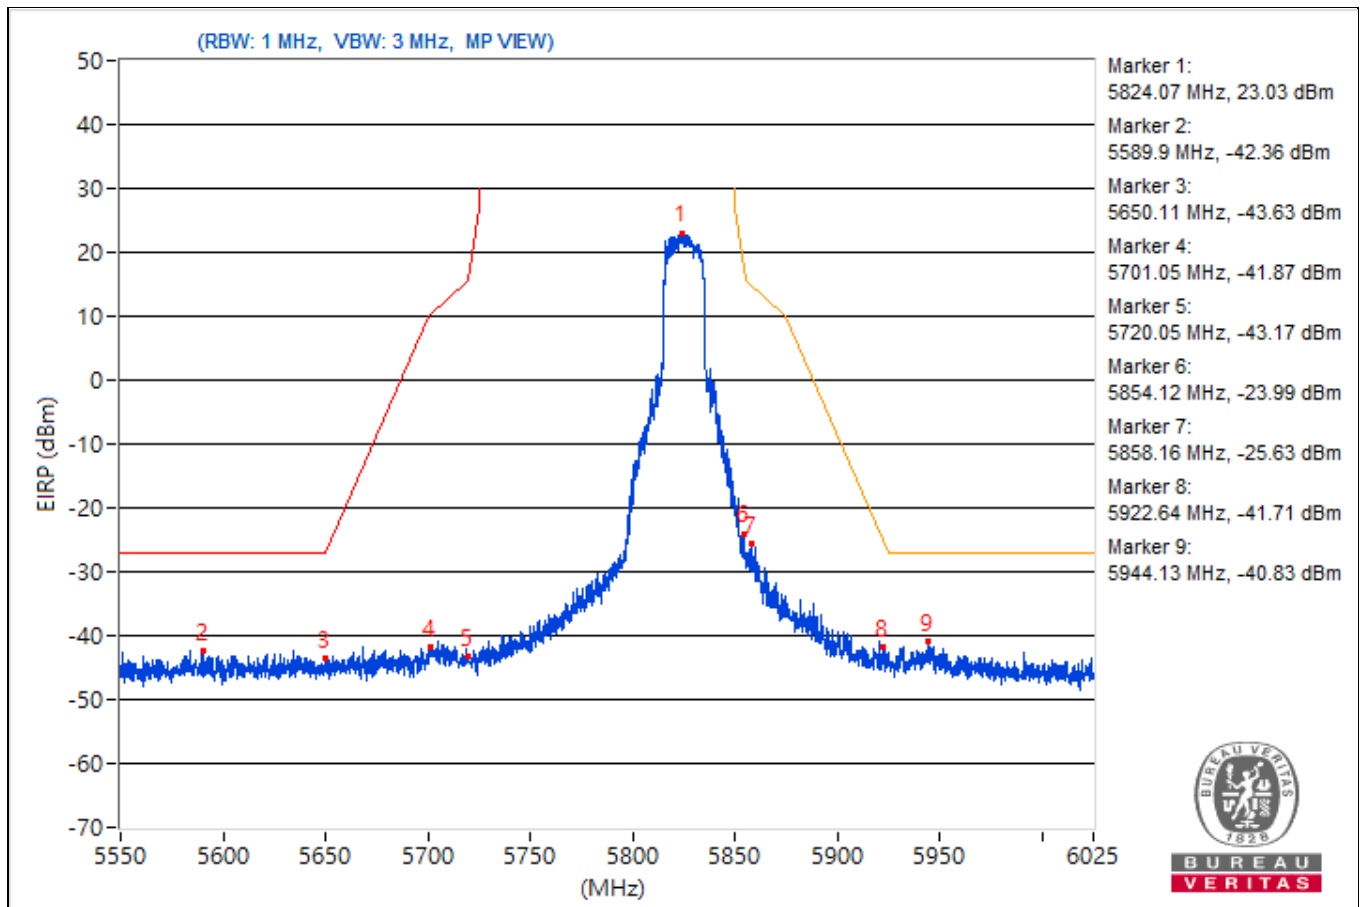


RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5188.68	112.6 PK			12.42	4.92	17.34
2	*5188.68	102.51 AV			2.33	4.92	7.25
3	5149.94	64.24 PK	74	-9.76	-35.94	4.92	-31.02
4	5149.94	53.93 AV	54	-0.07	-46.25	4.92	-41.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

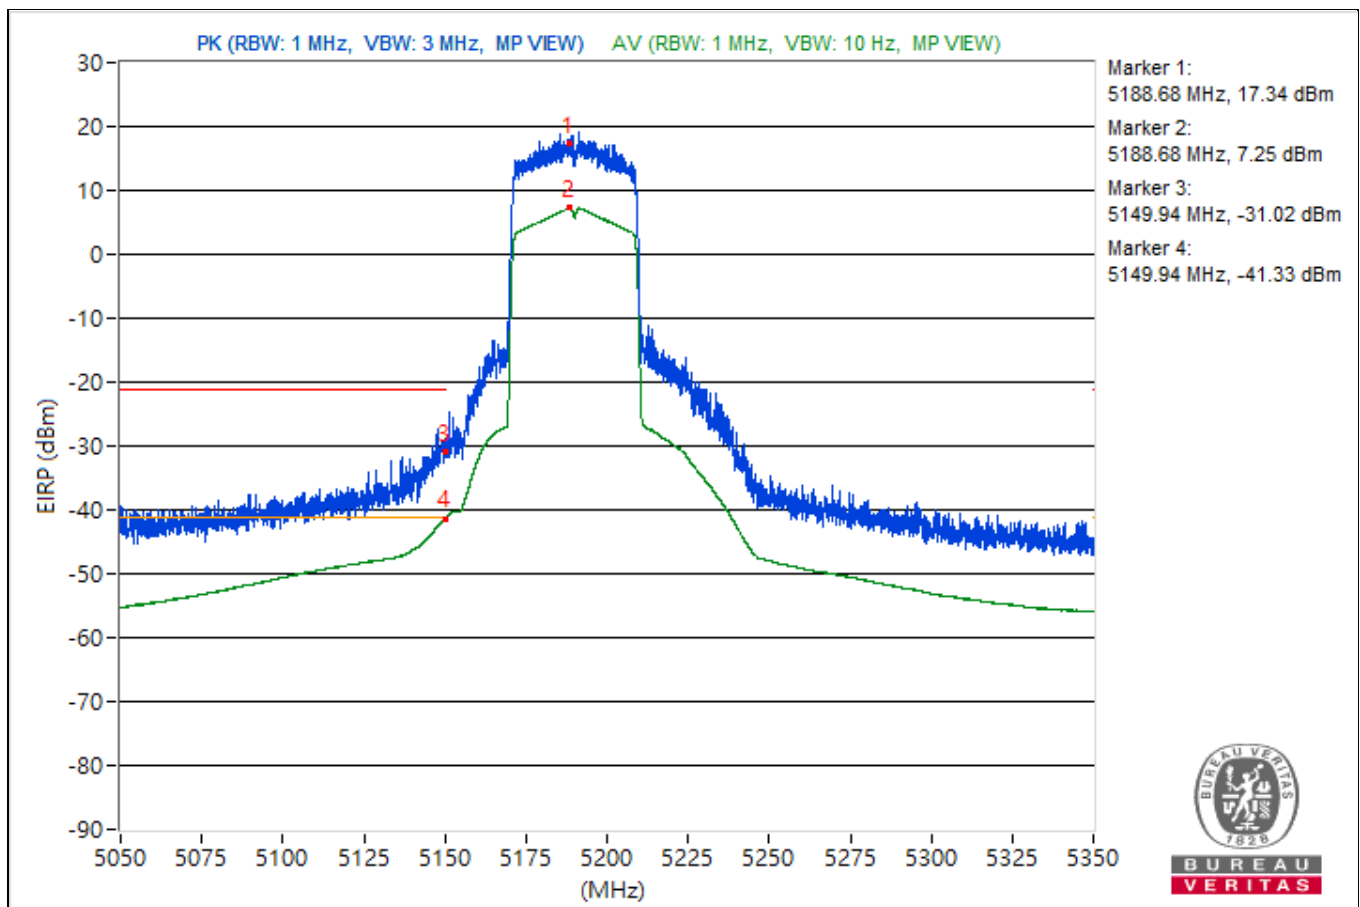


RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5228.57	115.83 PK			15.65	4.92	20.57
2	*5228.57	105.33 AV			5.15	4.92	10.07
3	5149.95	60.84 PK	74	-13.16	-39.34	4.92	-34.42
4	5149.95	51.7 AV	54	-2.3	-48.48	4.92	-43.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

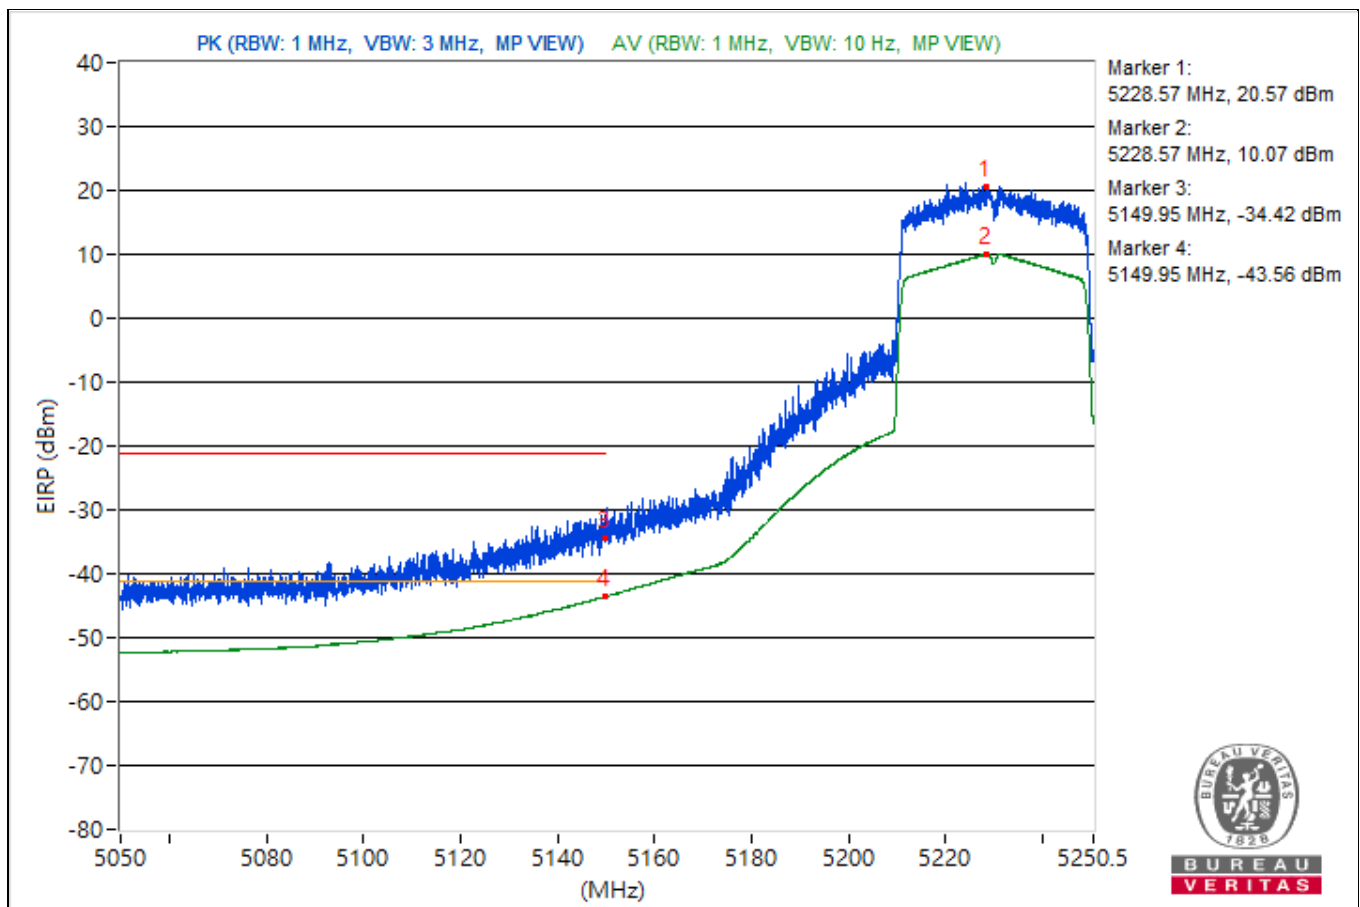


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5268.62	114.36 PK			14.18	4.92	19.1
2	*5268.62	105.2 AV			5.02	4.92	9.94
3	5350.13	58.47 PK	74	-15.53	-41.71	4.92	-36.79
4	5350.13	50.91 AV	54	-3.09	-49.27	4.92	-44.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

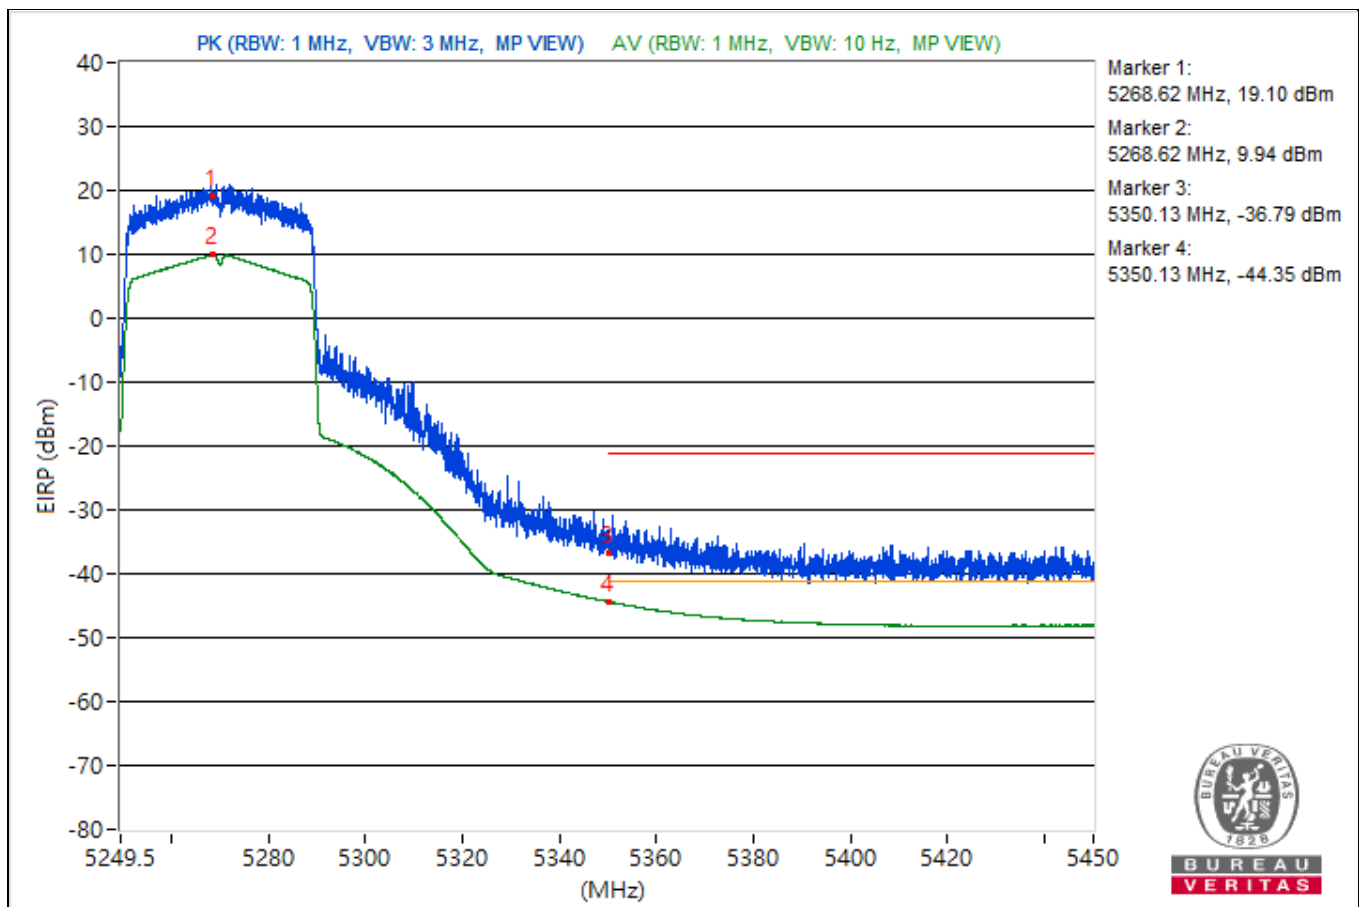


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5308.82	111.85 PK			11.67	4.92	16.59
2	*5308.82	102.93 AV			2.75	4.92	7.67
3	5350	60.37 PK	74	-13.63	-39.81	4.92	-34.89
4	5350	48.92 AV	54	-5.08	-51.26	4.92	-46.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

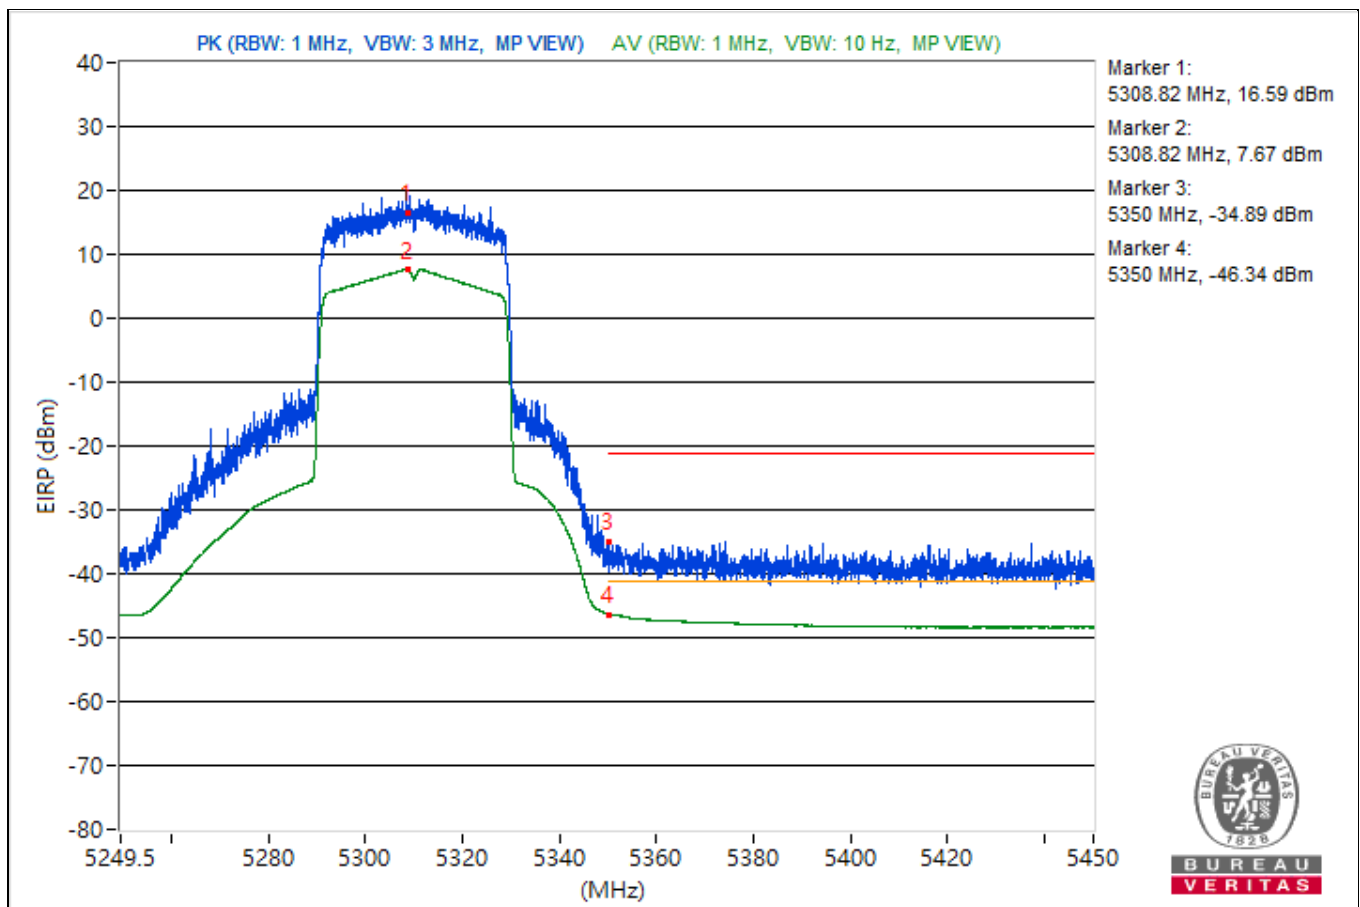


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5511.61	114.95 PK			14.77	4.92	19.69
2	*5508.79	102.88 AV			2.7	4.92	7.62
3	5449.62	61.93 PK	74	-12.07	-38.25	4.92	-33.33
4	5459.99	49.41 AV	54	-4.59	-50.77	4.92	-45.85
5	#5460.87	61.57 PK	68.26	-6.69	-38.61	4.92	-33.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

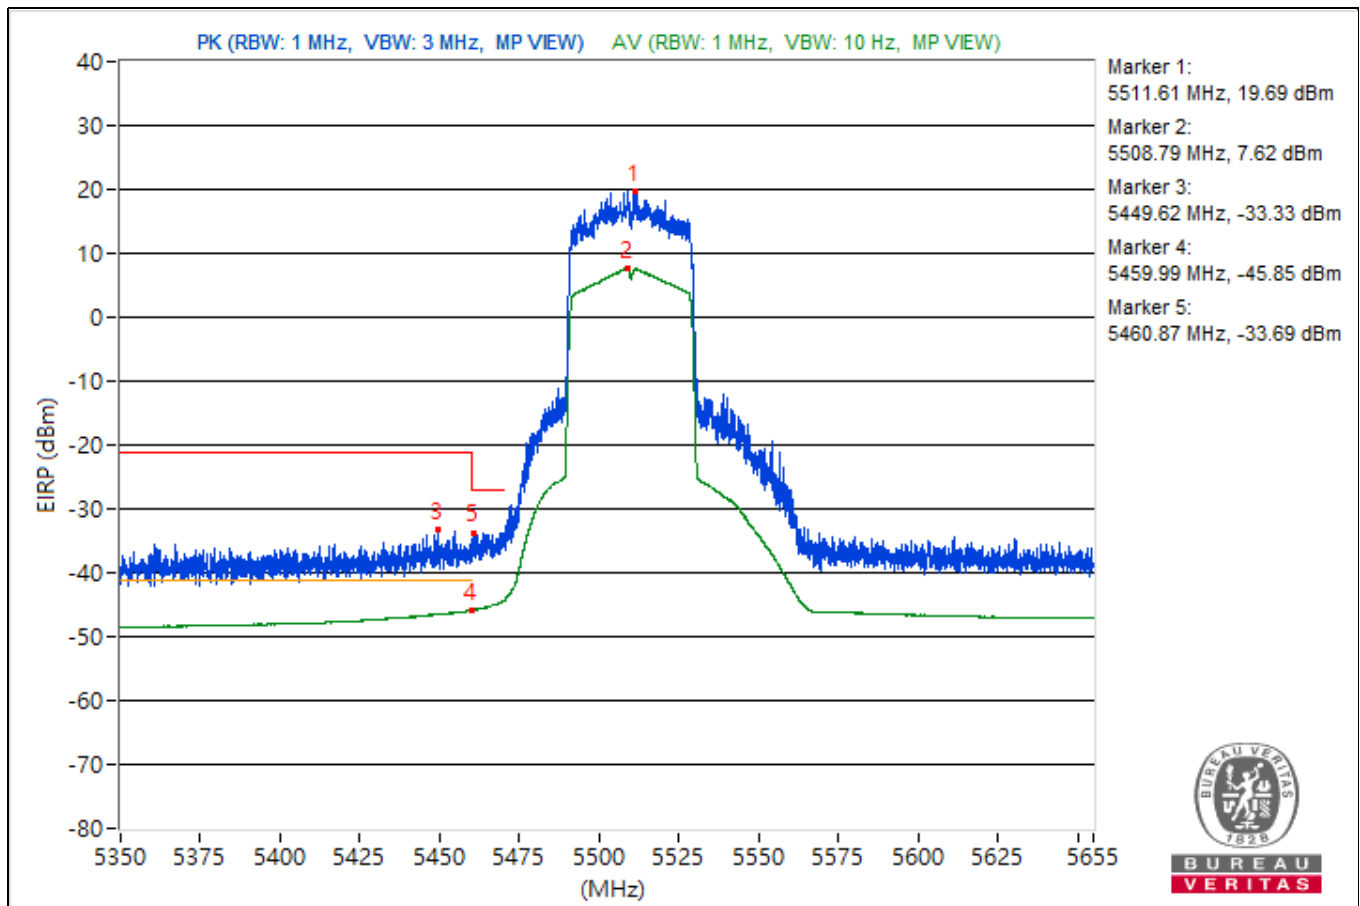


RF Mode	802.11be (EHT40)	Channel	CH 118 : 5590 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5594.11	116.55 PK			16.37	4.92	21.29
2	*5588.59	105.13 AV			4.95	4.92	9.87
3	5446.61	59.95 PK	74	-14.05	-40.23	4.92	-35.31
4	5459.99	47.87 AV	54	-6.13	-52.31	4.92	-47.39
5	#5468.72	60.76 PK	68.26	-7.5	-39.42	4.92	-34.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

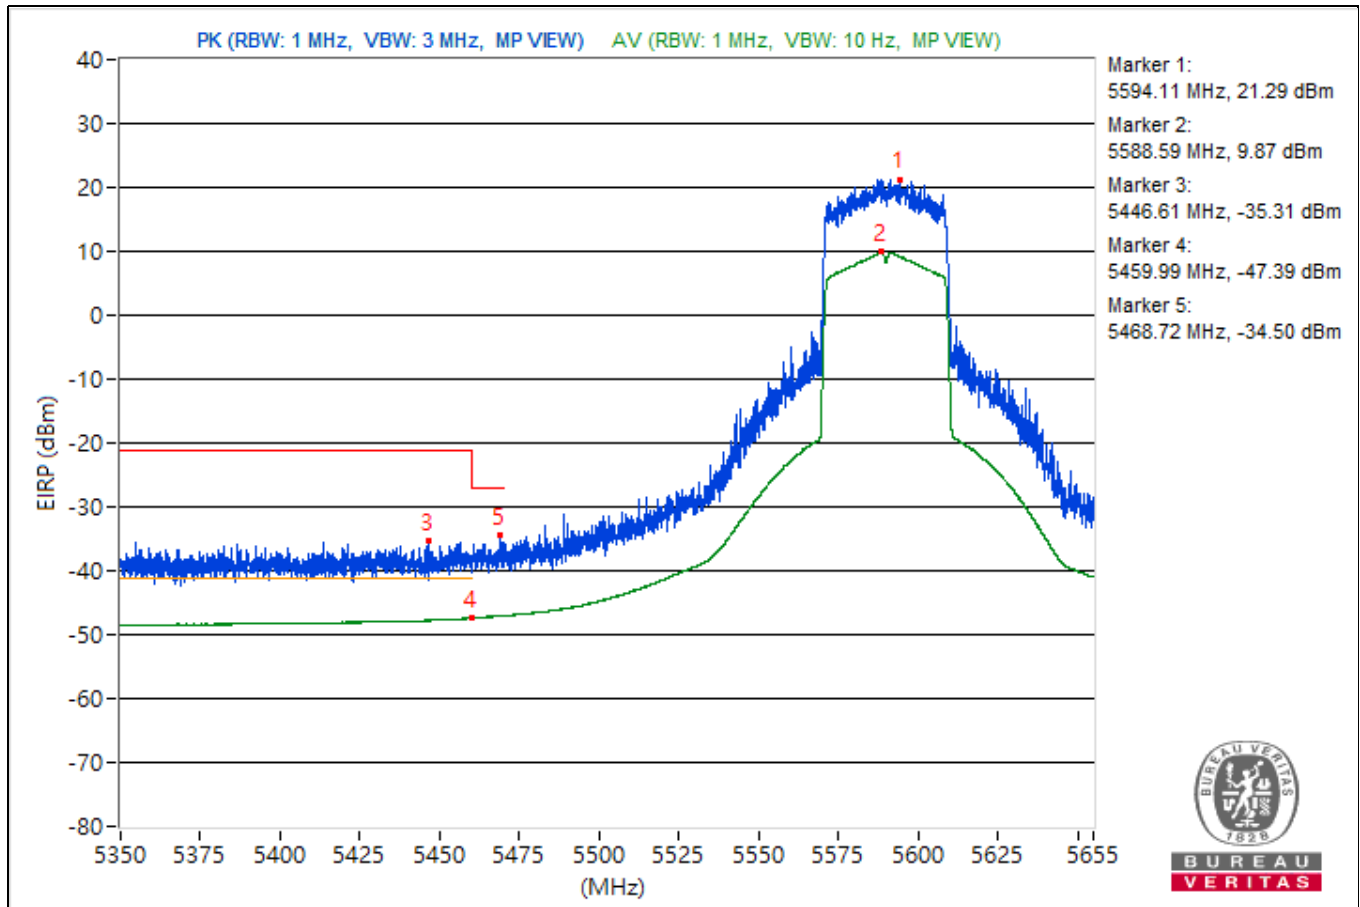


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5673.35	116.68			16.5	4.92	21.42
2	#5727.38	62.71	68.26	-5.55	-37.47	4.92	-32.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

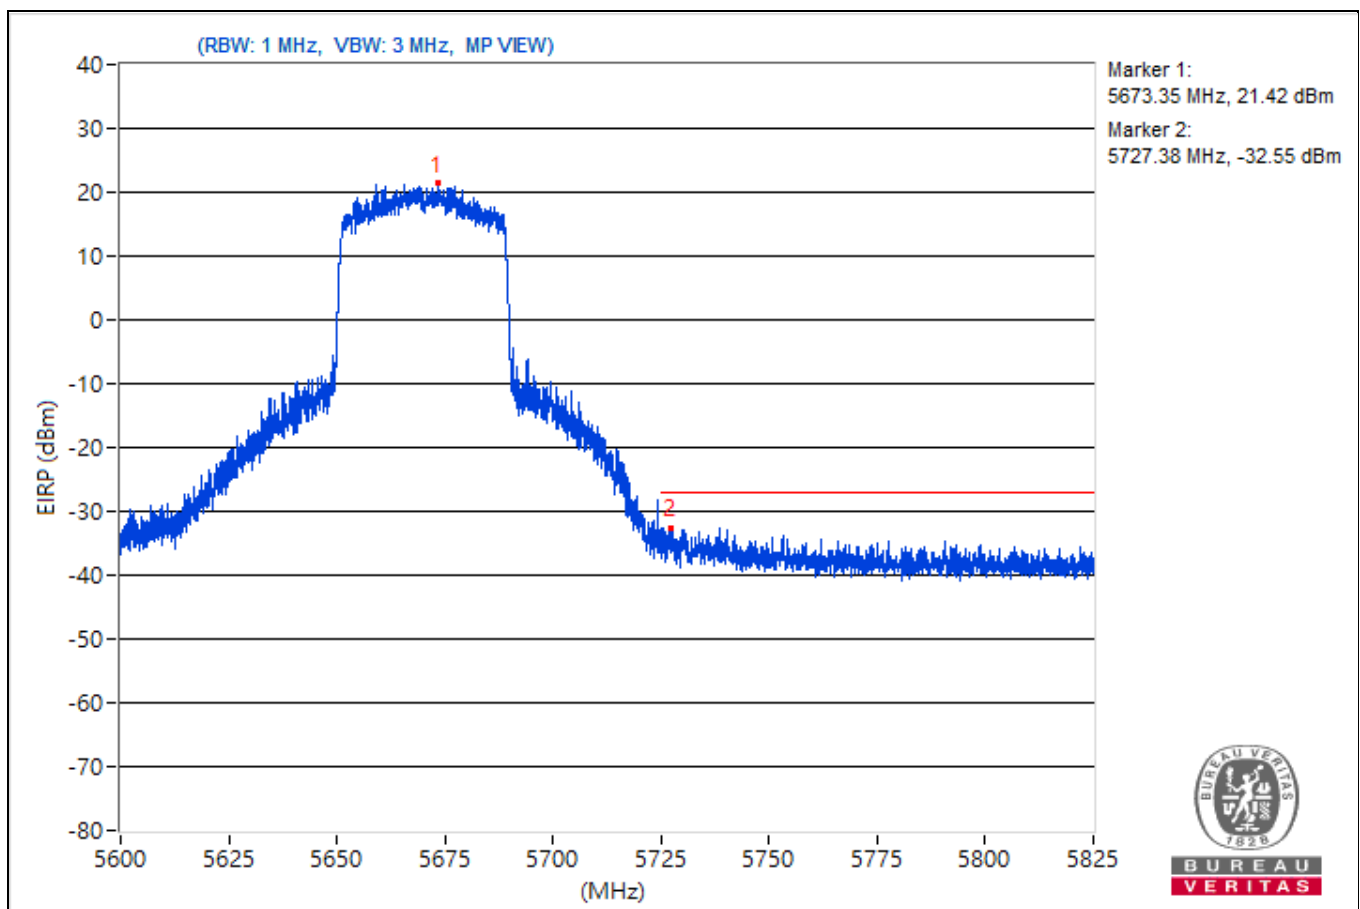


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.59	117.08			16.9	4.92	21.82
2	#5921.68	60.55	68.26	-7.71	-39.63	4.92	-34.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

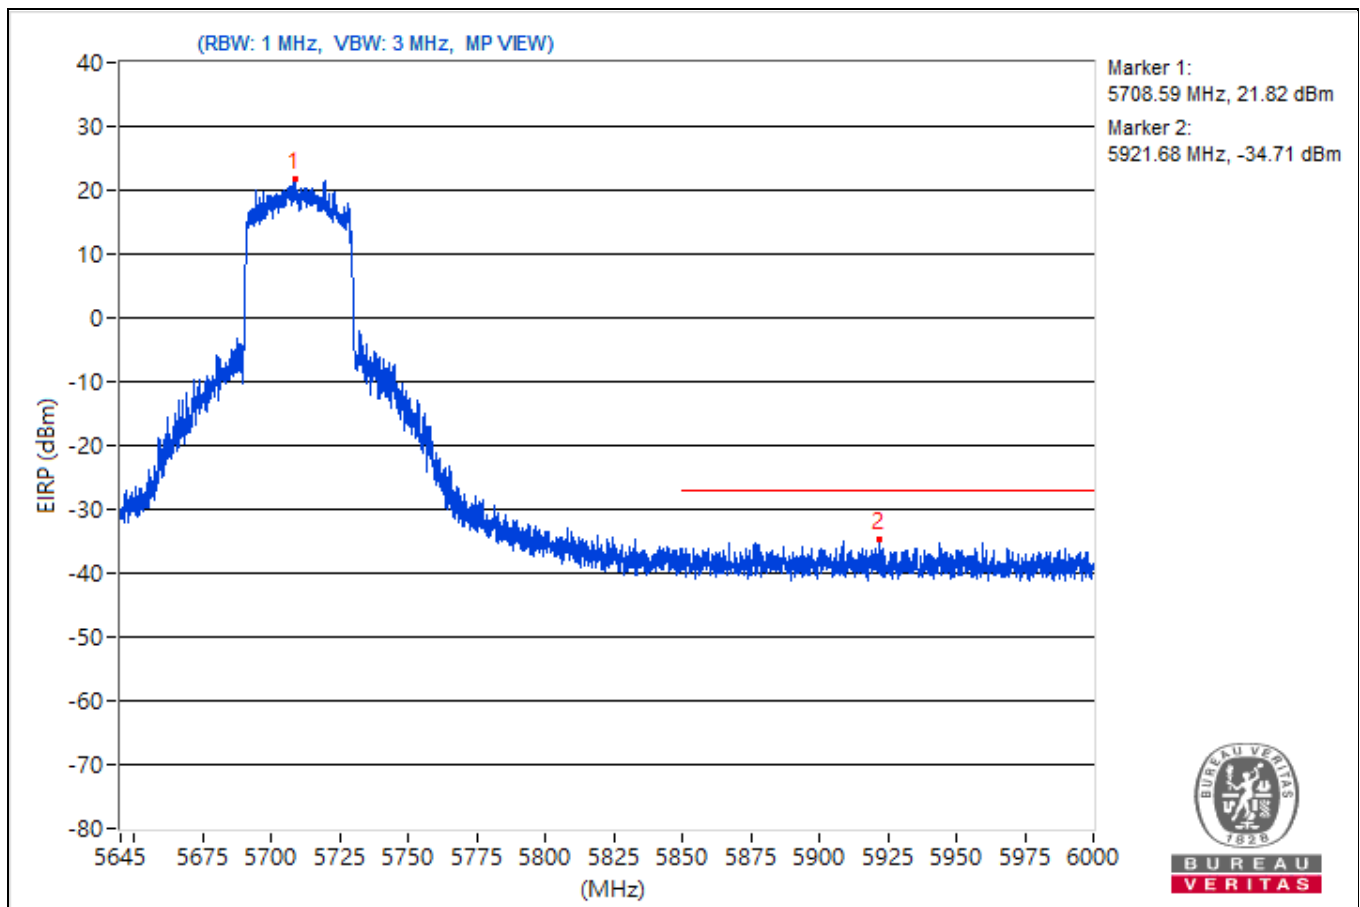


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5758.29	116.74			16.56	4.92	21.48
2	#5647.49	59.81	68.26	-8.45	-40.37	4.92	-35.45
3	#5652.84	59.49	70.36	-10.87	-40.69	4.92	-35.77
4	#5700.57	72.52	105.42	-32.9	-27.66	4.92	-22.74
5	#5720.29	79.04	111.52	-32.48	-21.14	4.92	-16.22
6	#5853.17	59.9	115.04	-55.14	-40.28	4.92	-35.36
7	#5873.95	54.93	105.55	-50.62	-45.25	4.92	-40.33
8	#5922.99	52.56	69.74	-17.18	-47.62	4.92	-42.7
9	#5976.79	53.41	68.26	-14.85	-46.77	4.92	-41.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

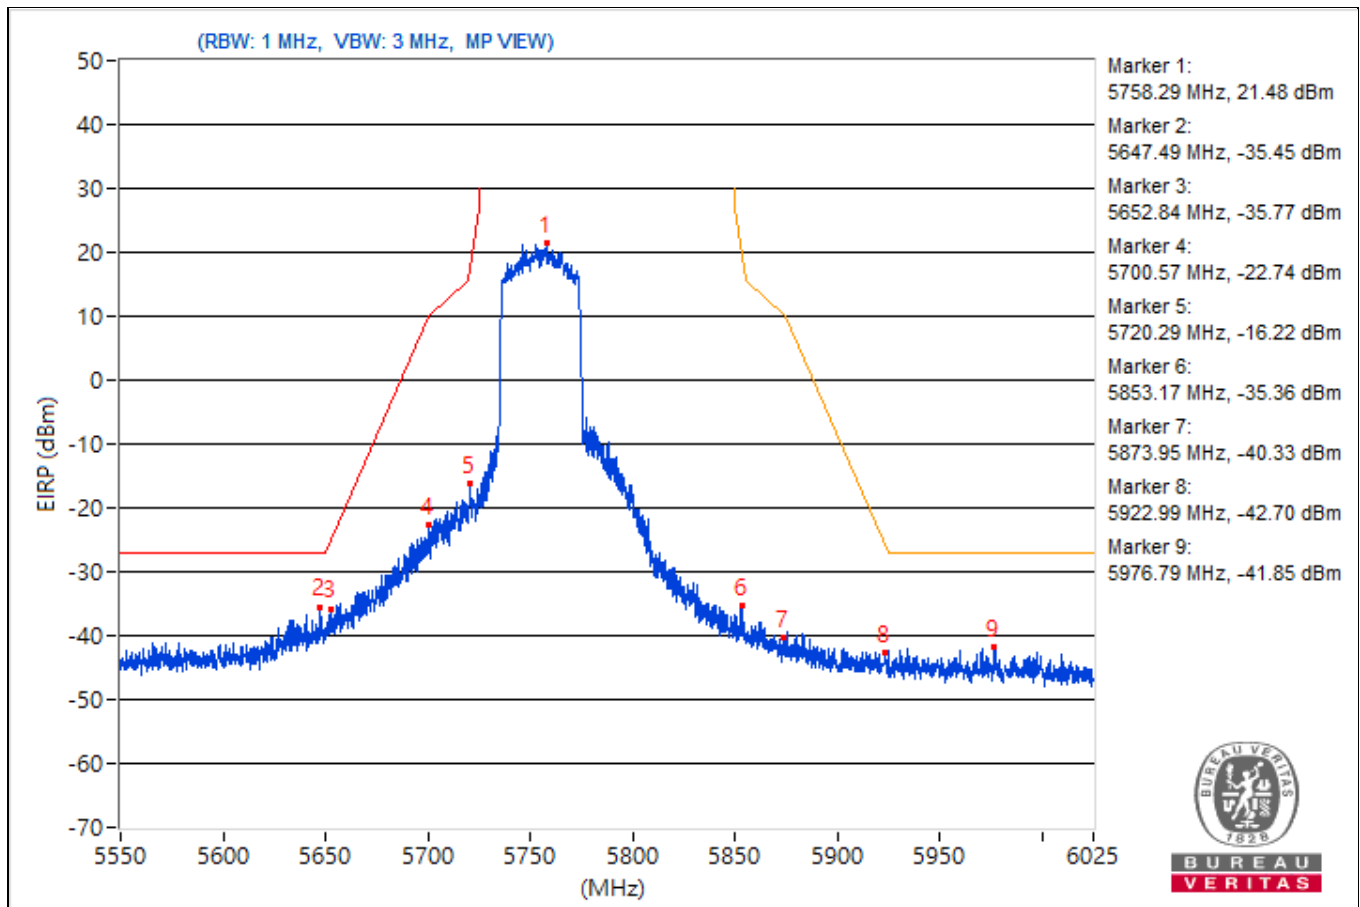


RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5792.84	116.34			16.16	4.92	21.08
2	#5645.12	56.06	68.26	-12.2	-44.12	4.92	-39.2
3	#5649.99	53.88	68.26	-14.38	-46.3	4.92	-41.38
4	#5705.44	62.99	106.78	-43.79	-37.19	4.92	-32.27
5	#5720.29	65.27	111.52	-46.25	-34.91	4.92	-29.99
6	#5854.59	66.87	111.79	-44.92	-33.31	4.92	-28.39
7	#5865.87	65.18	107.81	-42.63	-35	4.92	-30.08
8	#5924.18	54.11	68.87	-14.76	-46.07	4.92	-41.15
9	#5927.62	54.75	68.26	-13.51	-45.43	4.92	-40.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

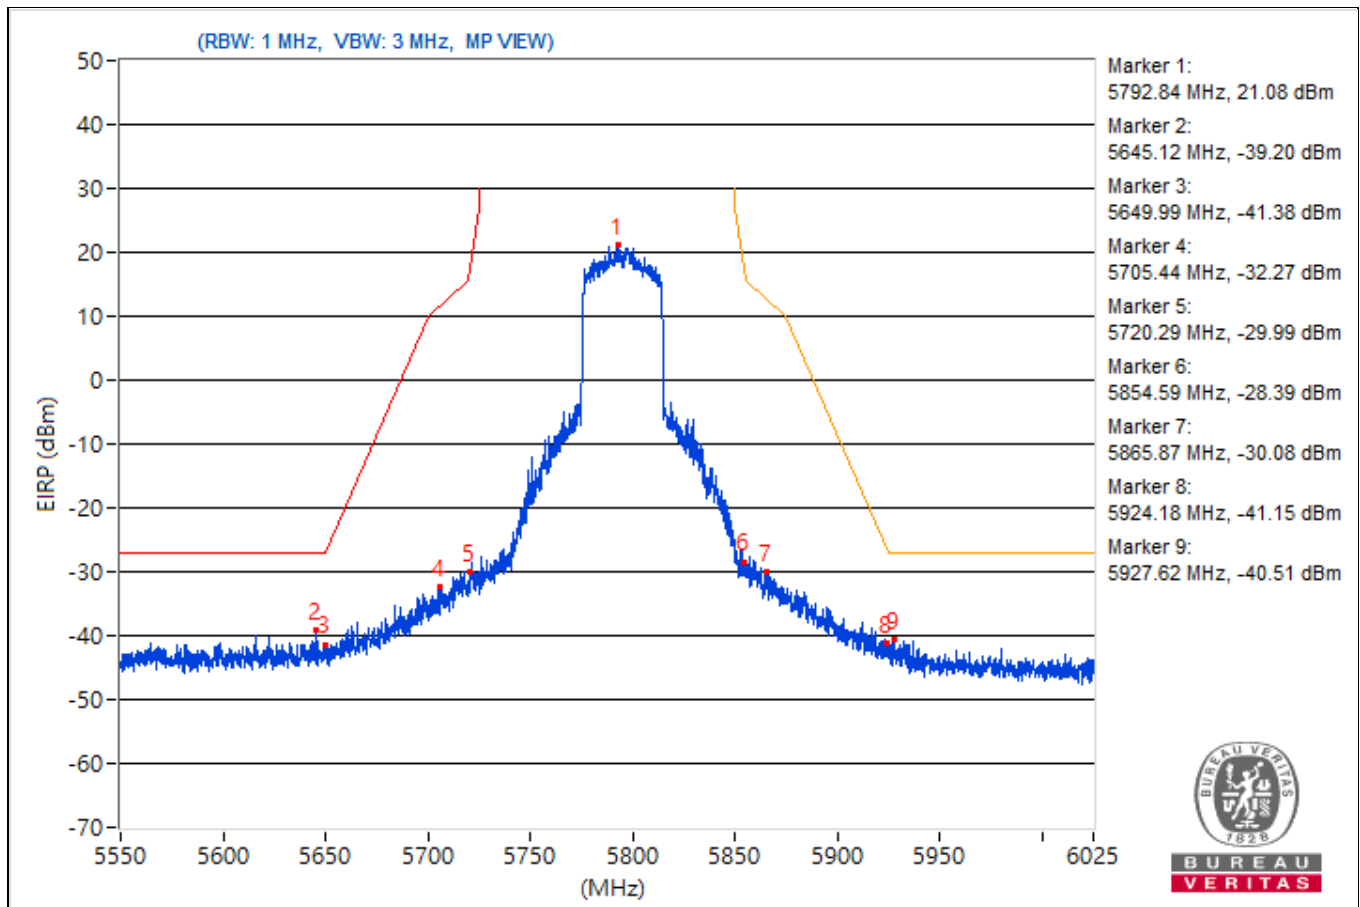


RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5208.36	109.65 PK			9.47	4.92	14.39
2	*5208.36	101.67 AV			1.49	4.92	6.41
3	5149.6	61.43 PK	74	-12.57	-38.75	4.92	-33.83
4	5149.6	53.35 AV	54	-0.65	-46.83	4.92	-41.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

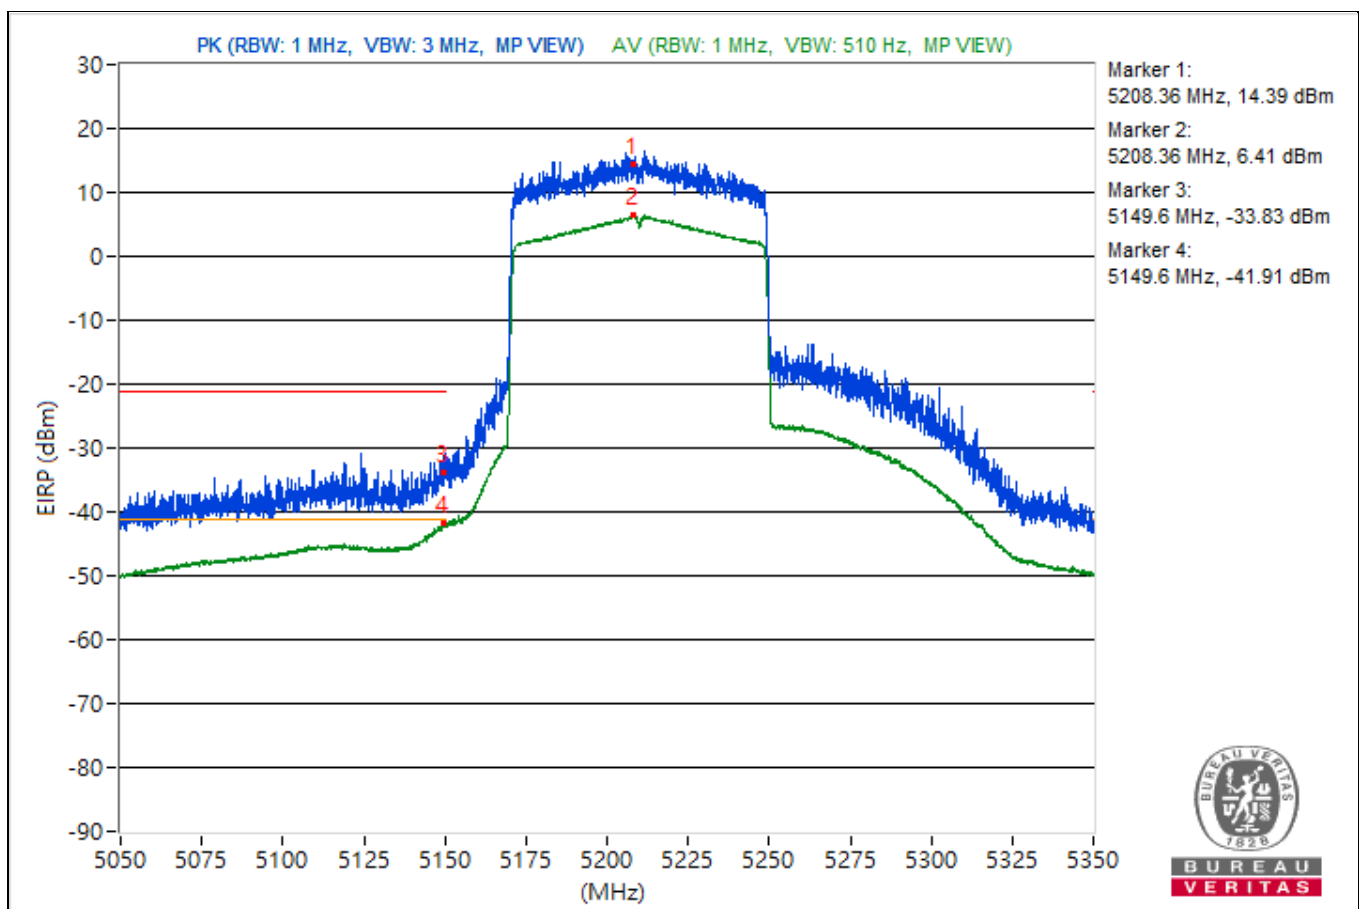


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5288.95	109.22 PK			9.04	4.92	13.96
2	*5288.95	101.15 AV			0.97	4.92	5.89
3	5362.13	59.73 PK	74	-14.27	-40.45	4.92	-35.53
4	5362.13	52.76 AV	54	-1.24	-47.42	4.92	-42.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

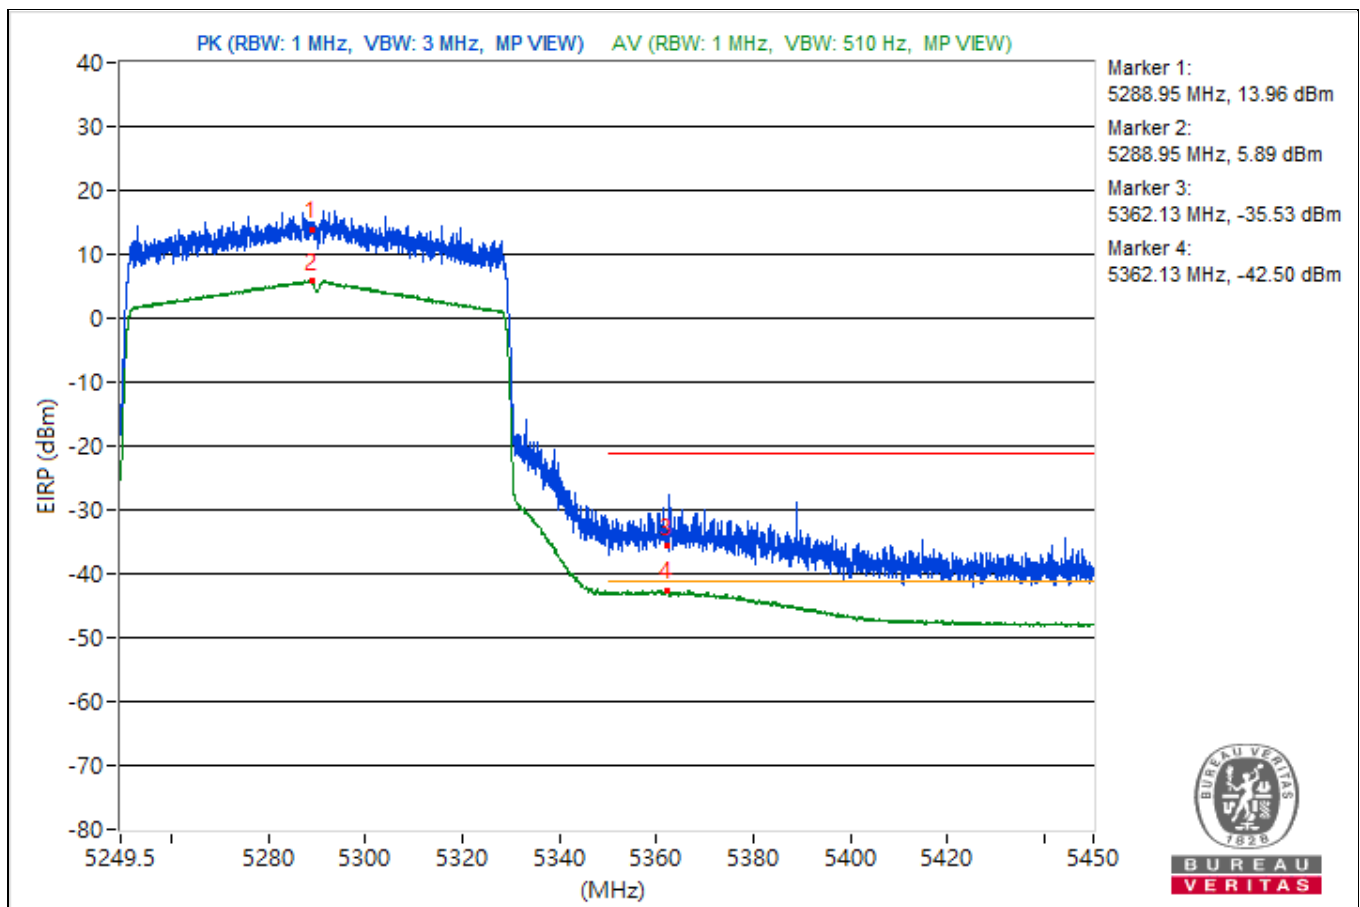


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5536.39	110.94 PK			10.76	4.92	15.68
2	*5528.39	98.27 AV			-1.91	4.92	3.01
3	5457.55	65.11 PK	74	-8.89	-35.07	4.92	-30.15
4	5456.18	52.82 AV	54	-1.18	-47.36	4.92	-42.44
5	#5467.88	65.41 PK	68.26	-2.85	-34.77	4.92	-29.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

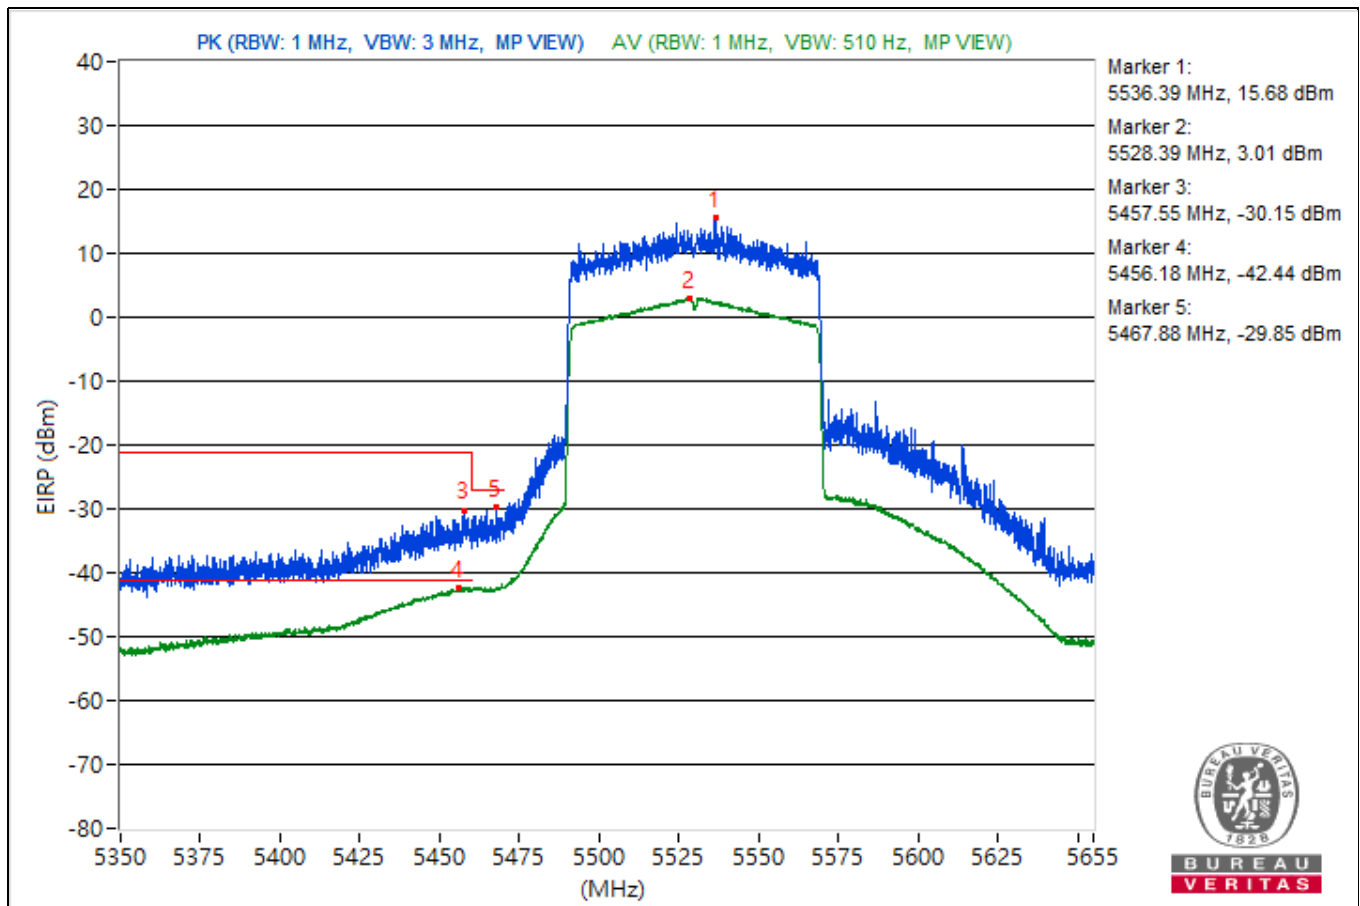


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5613.29	112.58 PK			12.4	4.92	17.32
2	*5608.94	101.37 AV			1.19	4.92	6.11
3	5457.47	63.04 PK	74	-10.96	-37.14	4.92	-32.22
4	5459.84	50.27 AV	54	-3.73	-49.91	4.92	-44.99
5	#5468.34	65.41 PK	68.26	-2.85	-34.77	4.92	-29.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

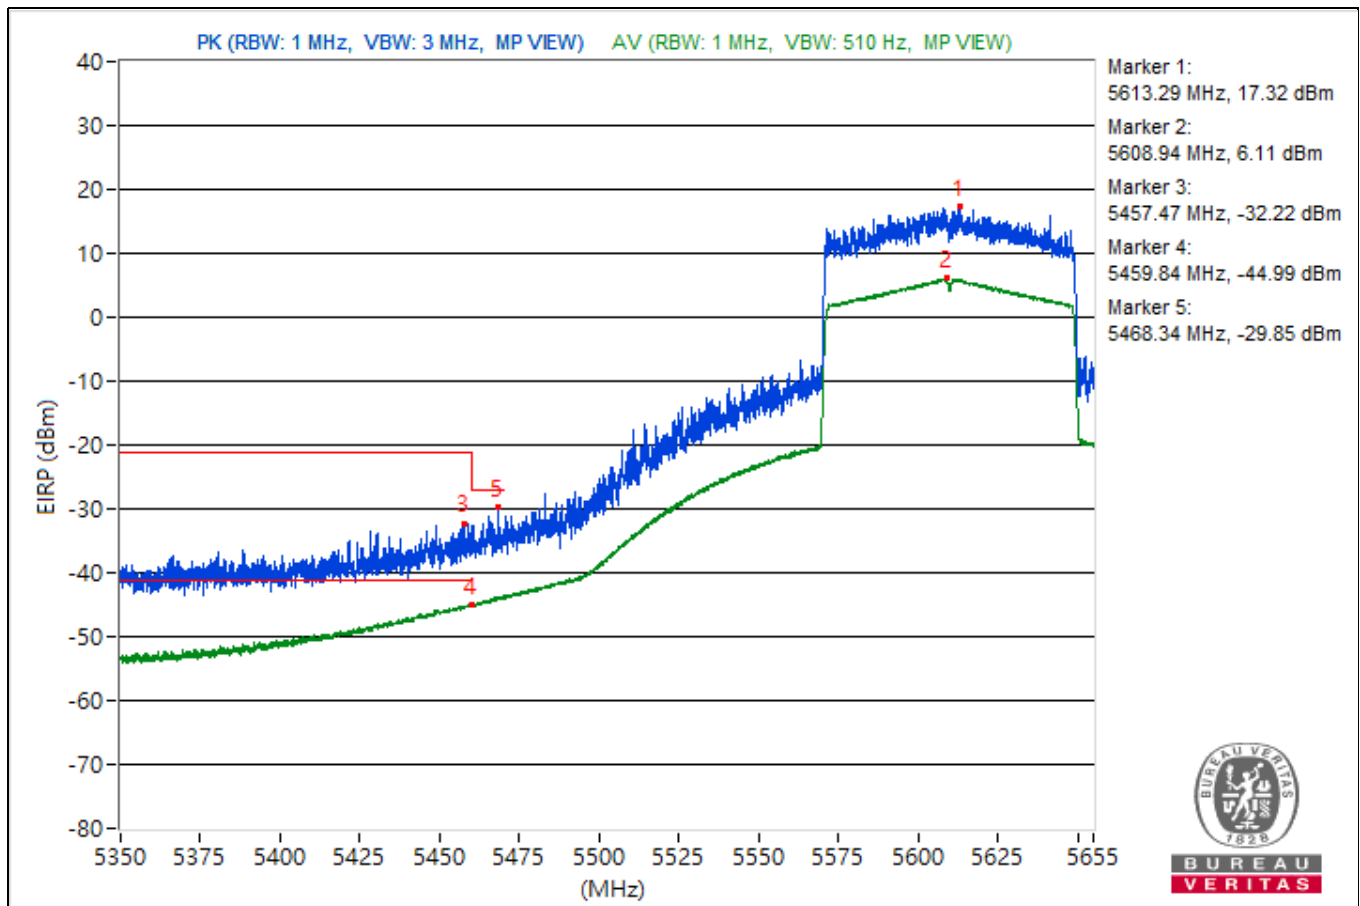


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5693.5	114.16			13.98	4.92	18.9
2	#5864.52	61.49	68.26	-6.77	-38.69	4.92	-33.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

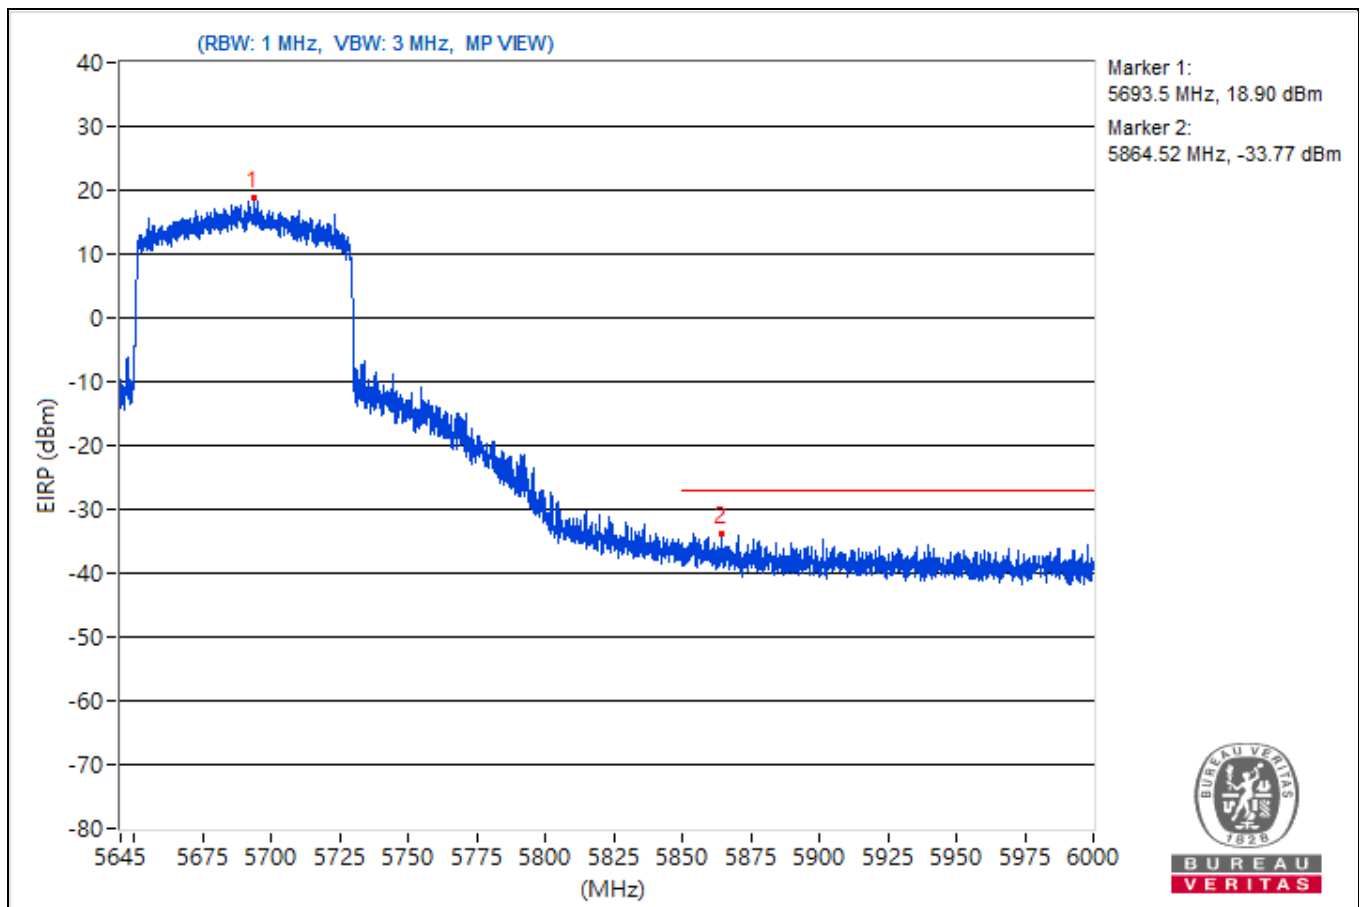


RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5777.88	113.98			13.8	4.92	18.72
2	#5649.75	67.47	68.26	-0.79	-32.71	4.92	-27.79
3	#5651.18	64.99	69.13	-4.14	-35.19	4.92	-30.27
4	#5706.51	82.58	107.08	-24.5	-17.6	4.92	-12.68
5	#5720.41	83.92	111.79	-27.87	-16.26	4.92	-11.34
6	#5853.88	80.75	113.41	-32.66	-19.43	4.92	-14.51
7	#5863.38	77.72	108.51	-30.79	-22.46	4.92	-17.54
8	#5924.18	59.9	68.87	-8.97	-40.28	4.92	-35.36
9	#5945.08	59.95	68.26	-8.31	-40.23	4.92	-35.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

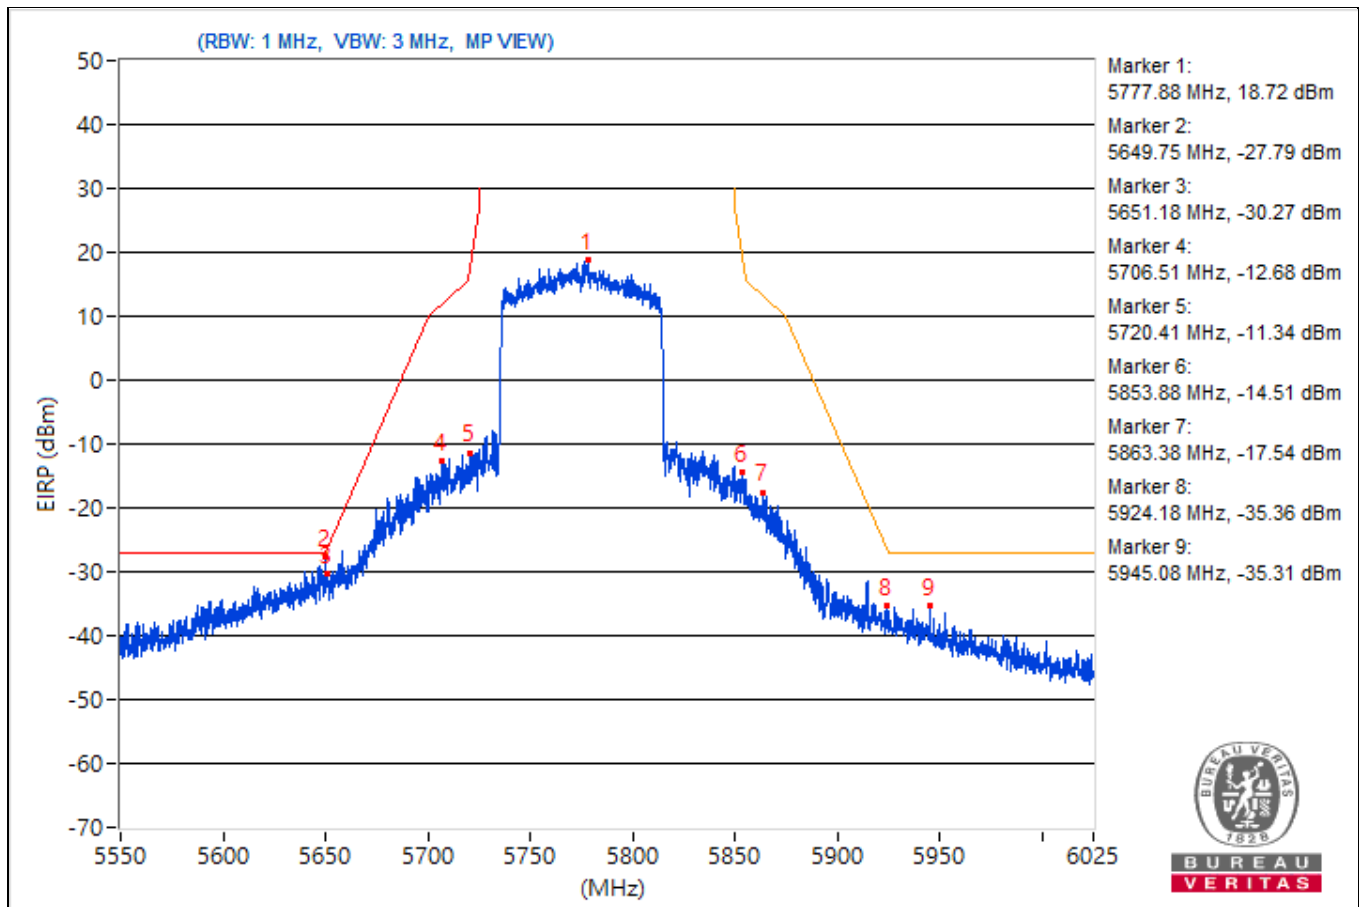


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5252.43	104.15 PK			3.97	4.92	8.89
2	*5252.43	96.99 AV			-3.19	4.92	1.73
3	5146.6	61.22 PK	74	-12.78	-38.96	4.92	-34.04
4	5146.6	53.65 AV	54	-0.35	-46.53	4.92	-41.61

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

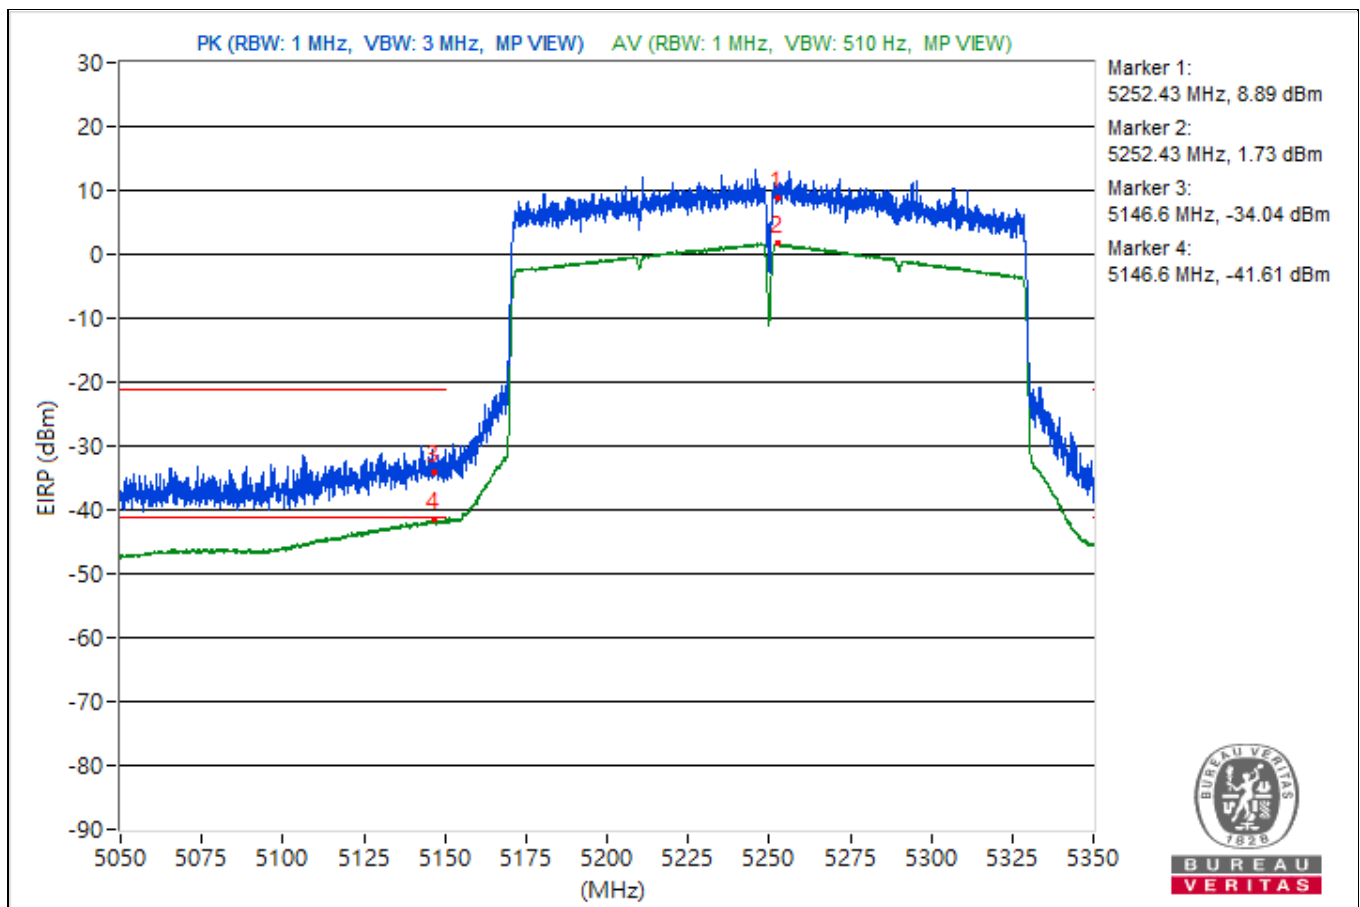


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 66% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5247.46	106.2 PK			6.02	4.92	10.94
2	*5247.46	97.03 AV			-3.15	4.92	1.77
3	5393.56	59.83 PK	74	-14.17	-40.35	4.92	-35.43
4	5393.56	50.01 AV	54	-3.99	-50.17	4.92	-45.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

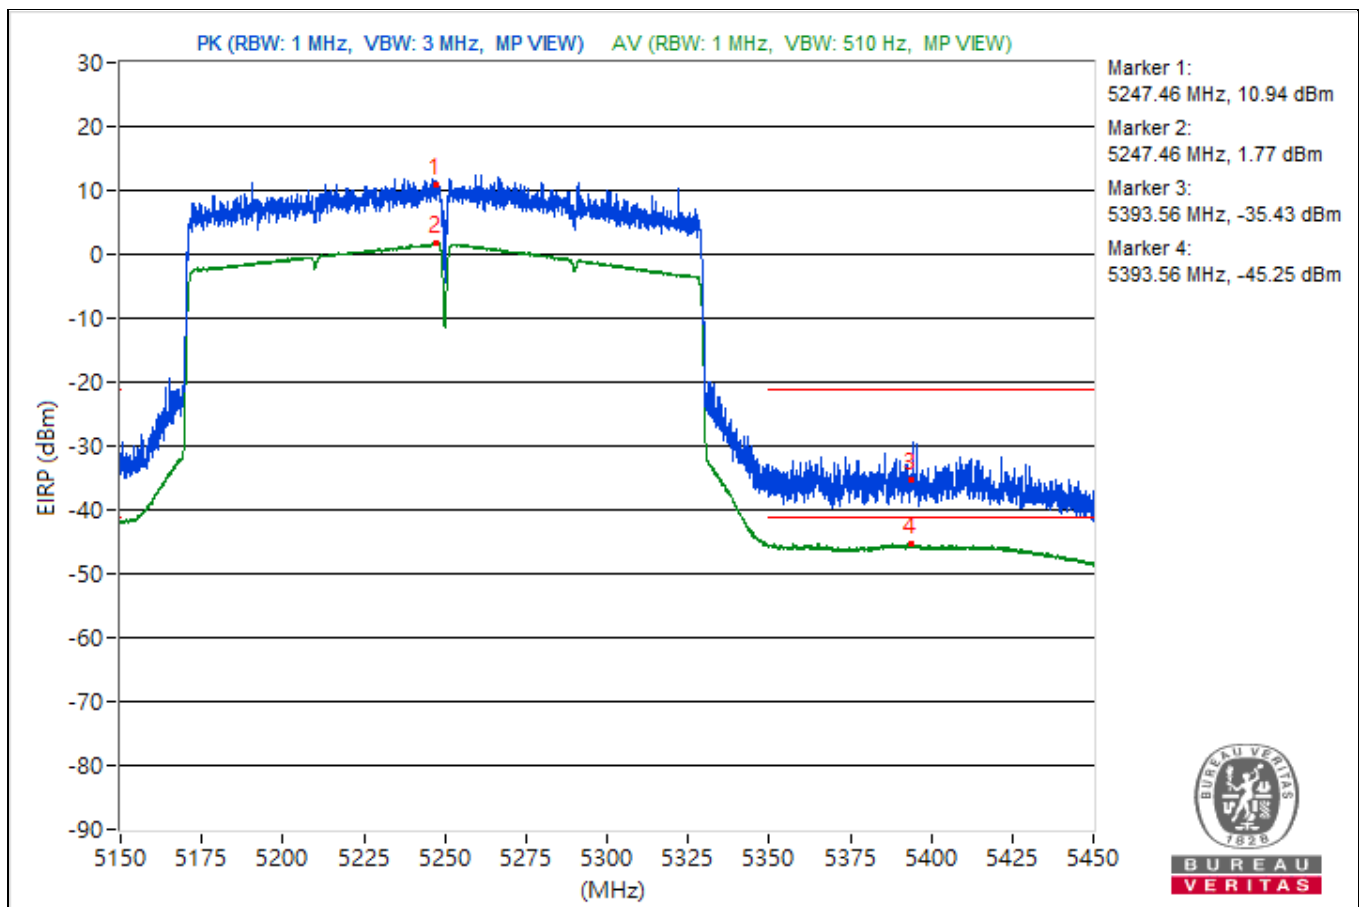


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5561.94	106.96 PK			6.78	4.92	11.7
2	*5572.84	95.22 AV			-4.96	4.92	-0.04
3	5459.27	64.65 PK	74	-9.35	-35.53	4.92	-30.61
4	5458.31	52.09 AV	54	-1.91	-48.09	4.92	-43.17
5	#5461.78	64.12 PK	68.26	-4.14	-36.06	4.92	-31.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

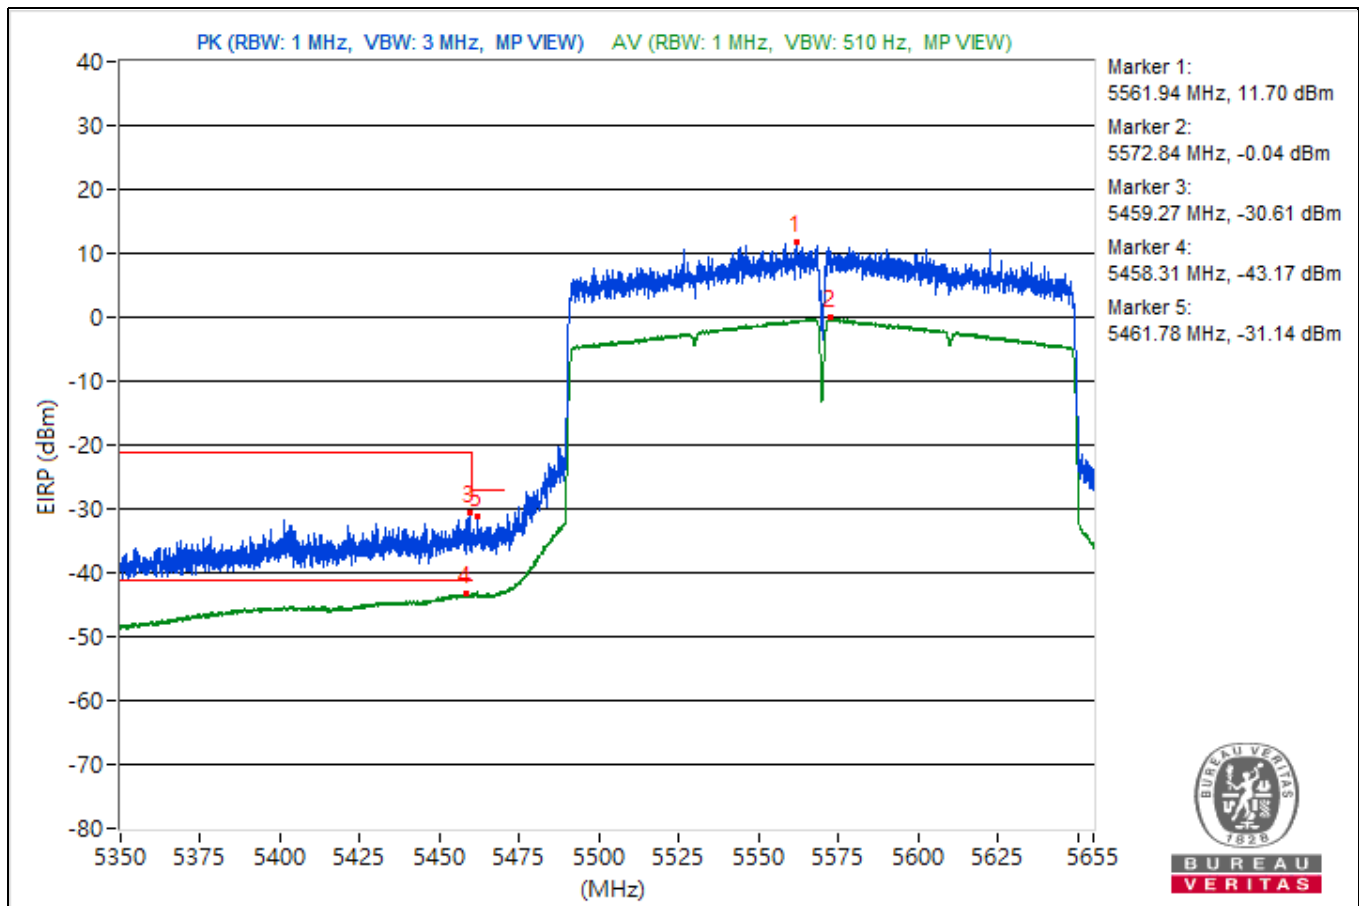


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5171.63	120.62 PK			20.44	4.92	25.36
2	*5171.63	110.85 AV			10.67	4.92	15.59
3	5149.75	56.6 PK	74	-17.4	-43.58	4.92	-38.66
4	5149.75	45.3 AV	54	-8.7	-54.88	4.92	-49.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

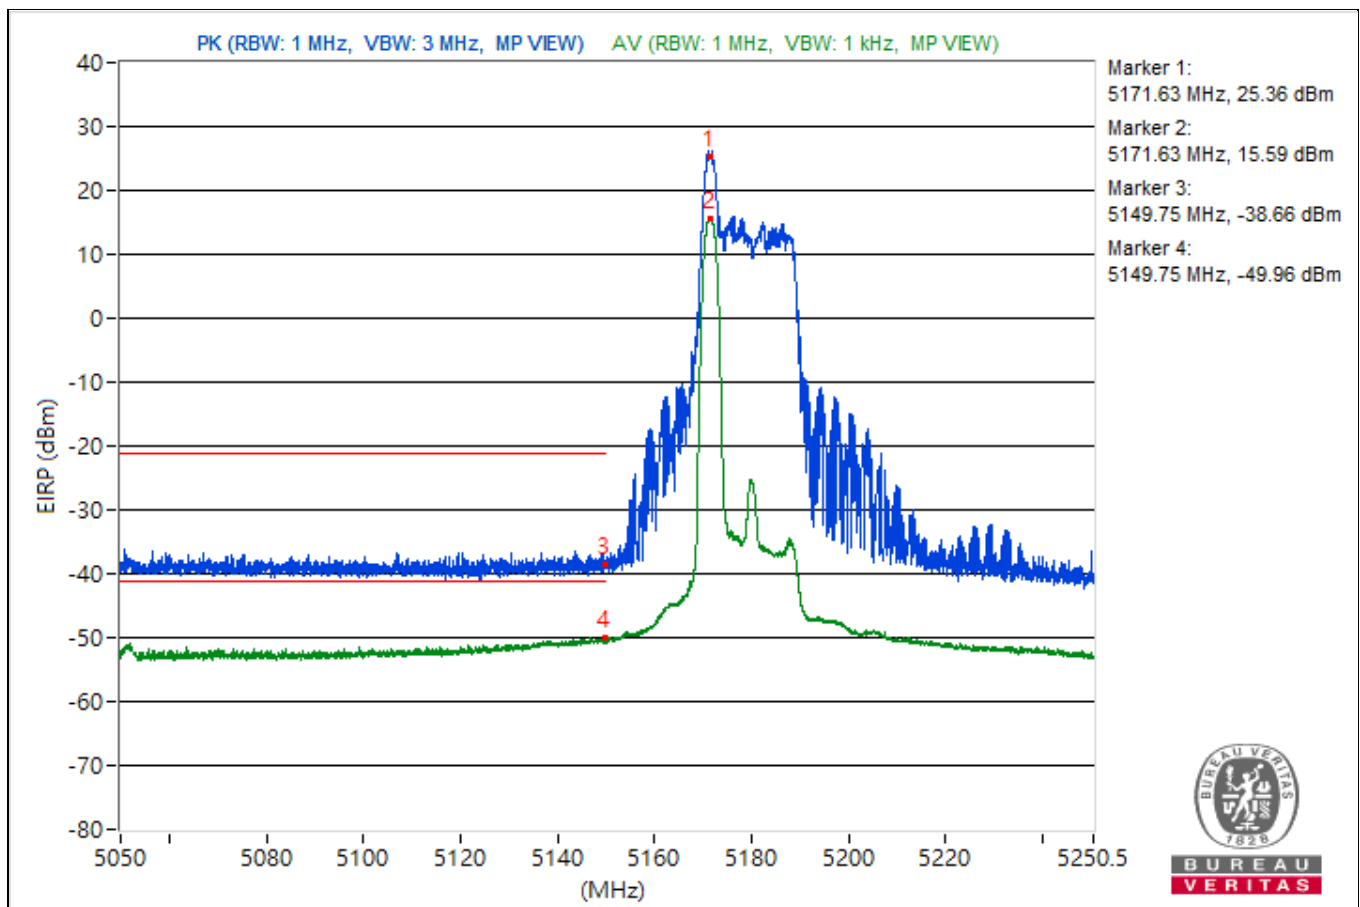


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5328.55	118.98 PK			18.8	4.92	23.72
2	*5328.55	110.09 AV			9.91	4.92	14.83
3	5350.48	55.7 PK	74	-18.3	-44.48	4.92	-39.56
4	5350.48	43.7 AV	54	-10.3	-56.48	4.92	-51.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

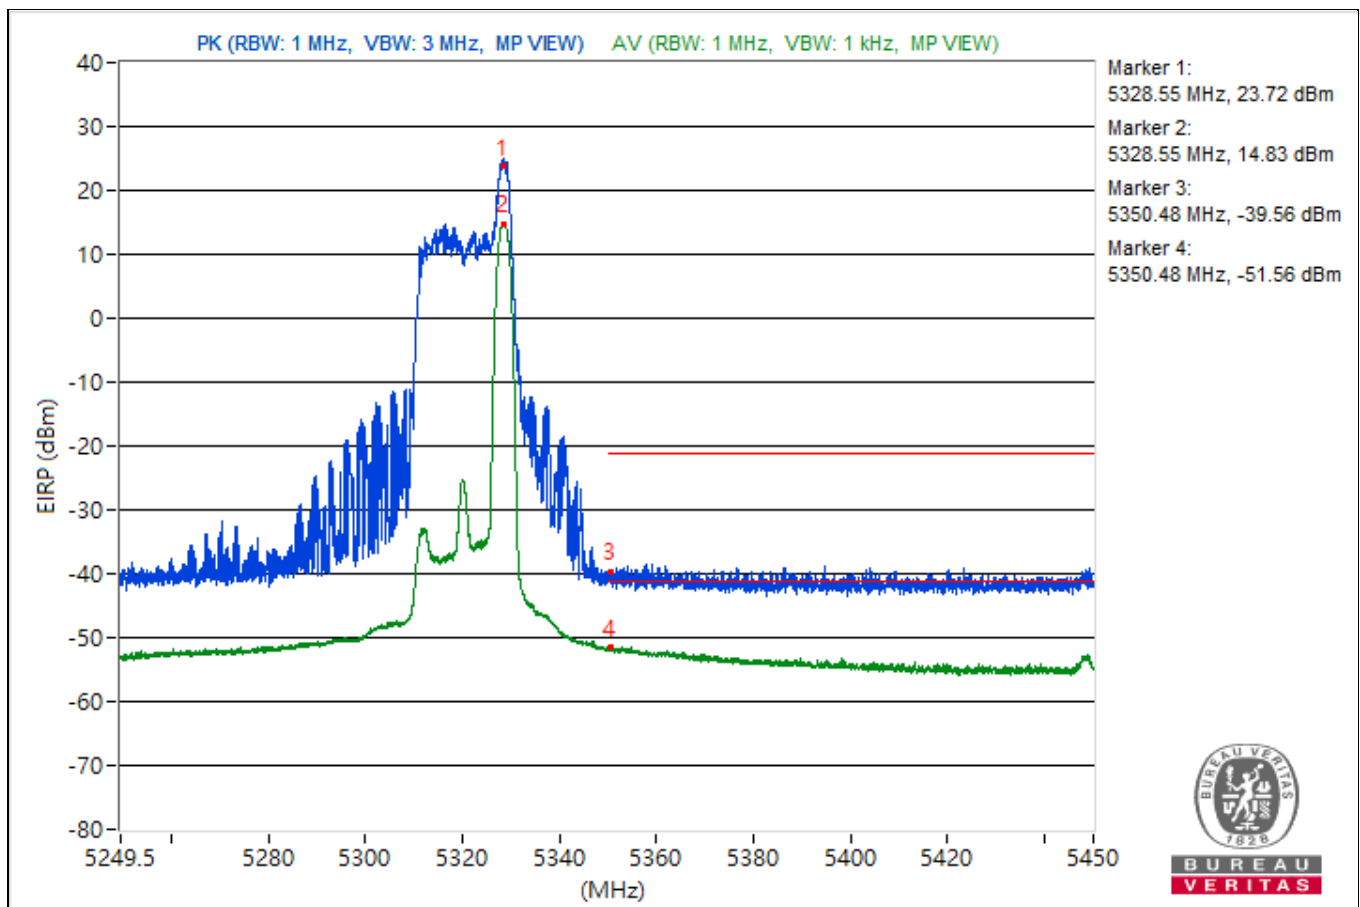


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5490.91	120.76 PK			20.58	4.92	25.5
2	*5491.79	110.81 AV			10.63	4.92	15.55
3	5459.53	57.06 PK	74	-16.94	-43.12	4.92	-38.2
4	5458.77	44.54 AV	54	-9.46	-55.64	4.92	-50.72
5	#5467.73	57.16 PK	68.26	-11.1	-43.02	4.92	-38.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

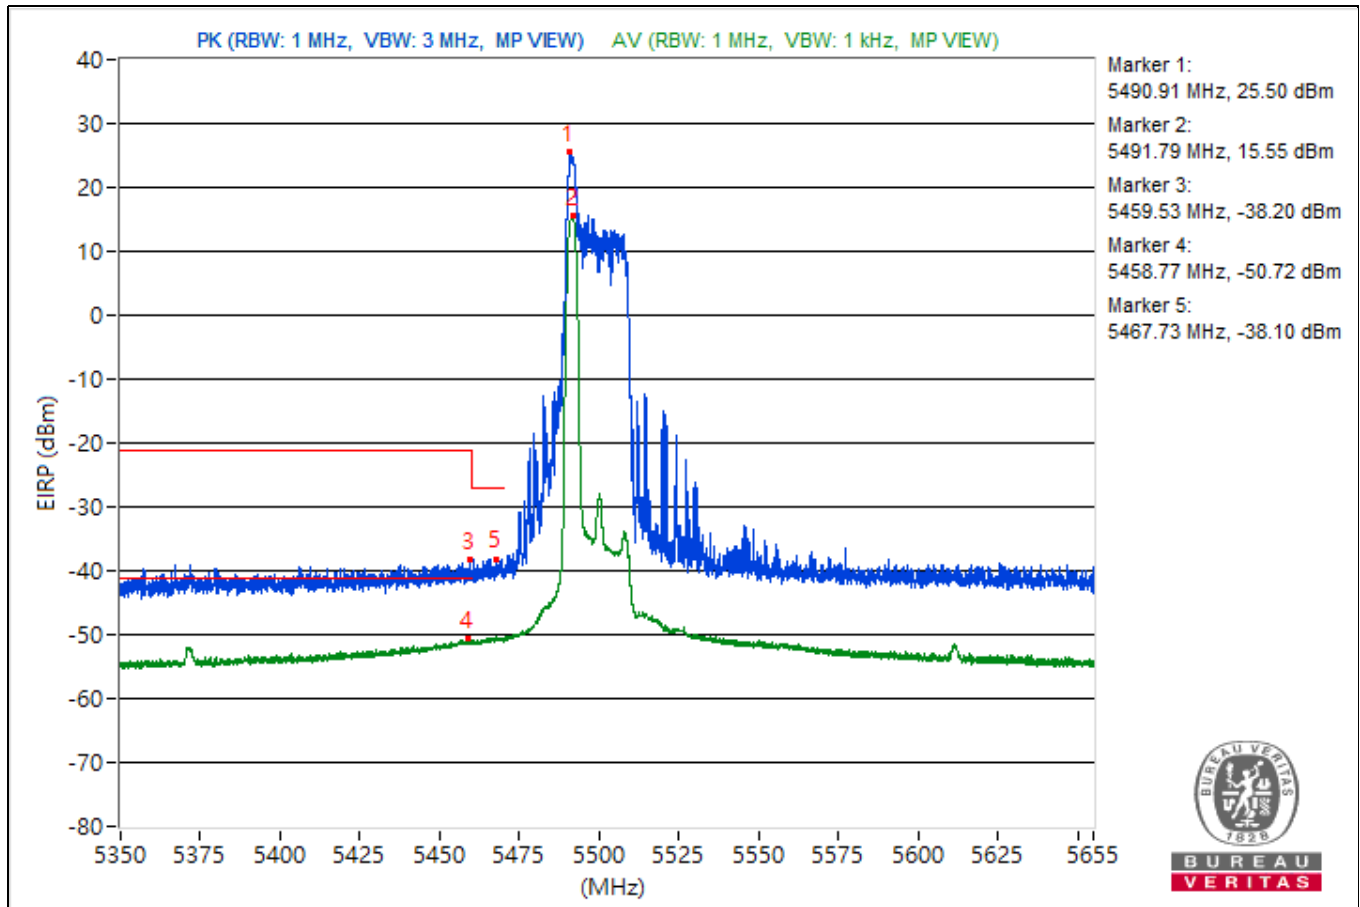


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5709.01	121.18			21	4.92	25.92
2	#5734.3	57.91	68.26	-10.35	-42.27	4.92	-37.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

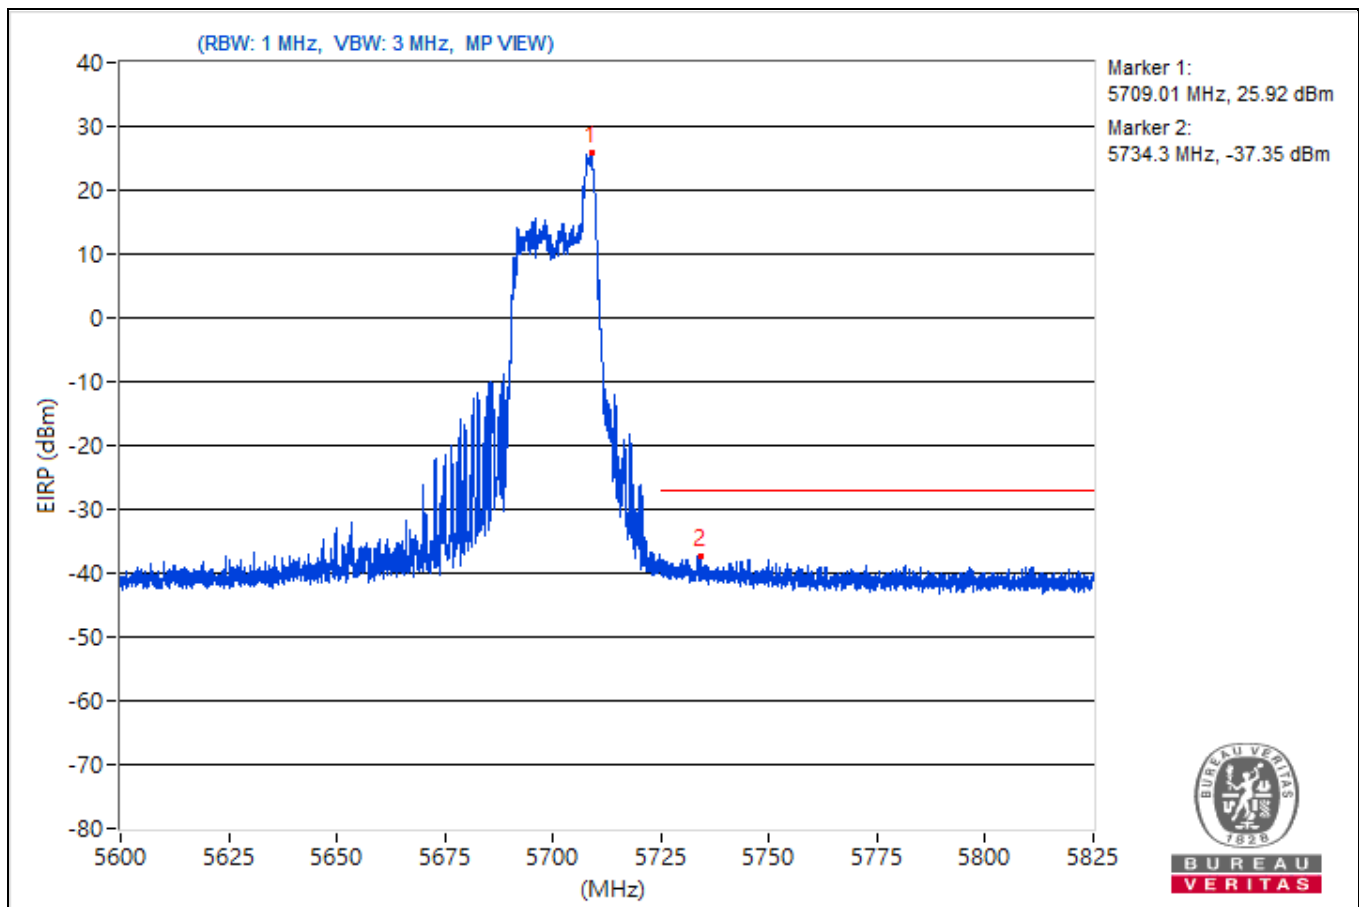


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5728.38	121.38			21.2	4.92	26.12
2	#5860.57	57.03	68.26	-11.23	-43.15	4.92	-38.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

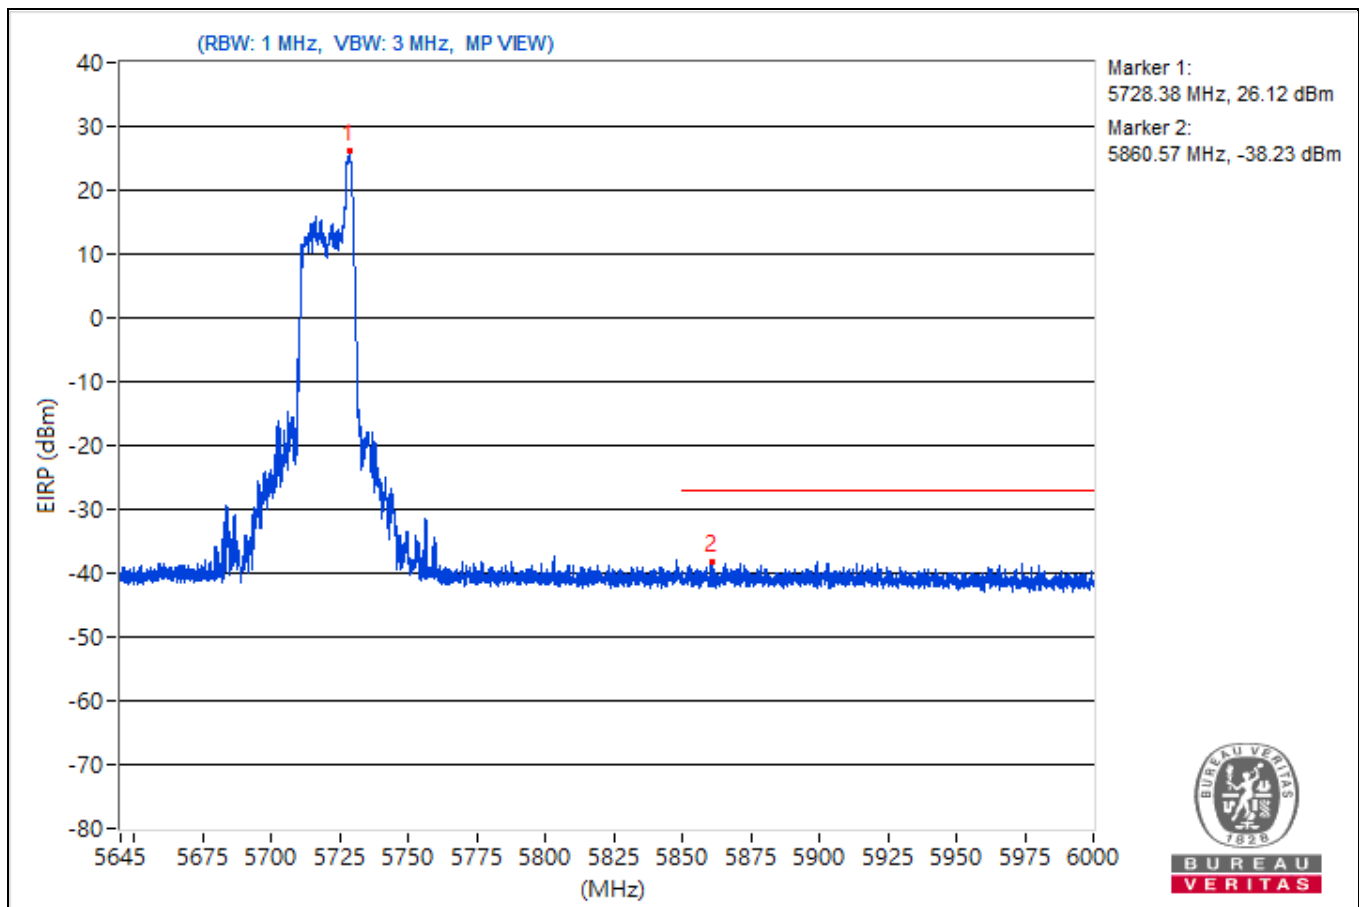


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5736.2	124.49			24.31	4.92	29.23
2	#5633.24	59.56	68.26	-8.7	-40.62	4.92	-35.7
3	#5651.29	57.63	69.22	-11.59	-42.55	4.92	-37.63
4	#5717.44	82.87	110.14	-27.27	-17.31	4.92	-12.39
5	#5721.12	84.16	113.41	-29.25	-16.02	4.92	-11.1
6	#5854.59	55.9	111.79	-55.89	-44.28	4.92	-39.36
7	#5872.76	56.34	105.89	-49.55	-43.84	4.92	-38.92
8	#5923.71	55.88	69.22	-13.34	-44.3	4.92	-39.38
9	#5944.49	57.63	68.26	-10.63	-42.55	4.92	-37.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

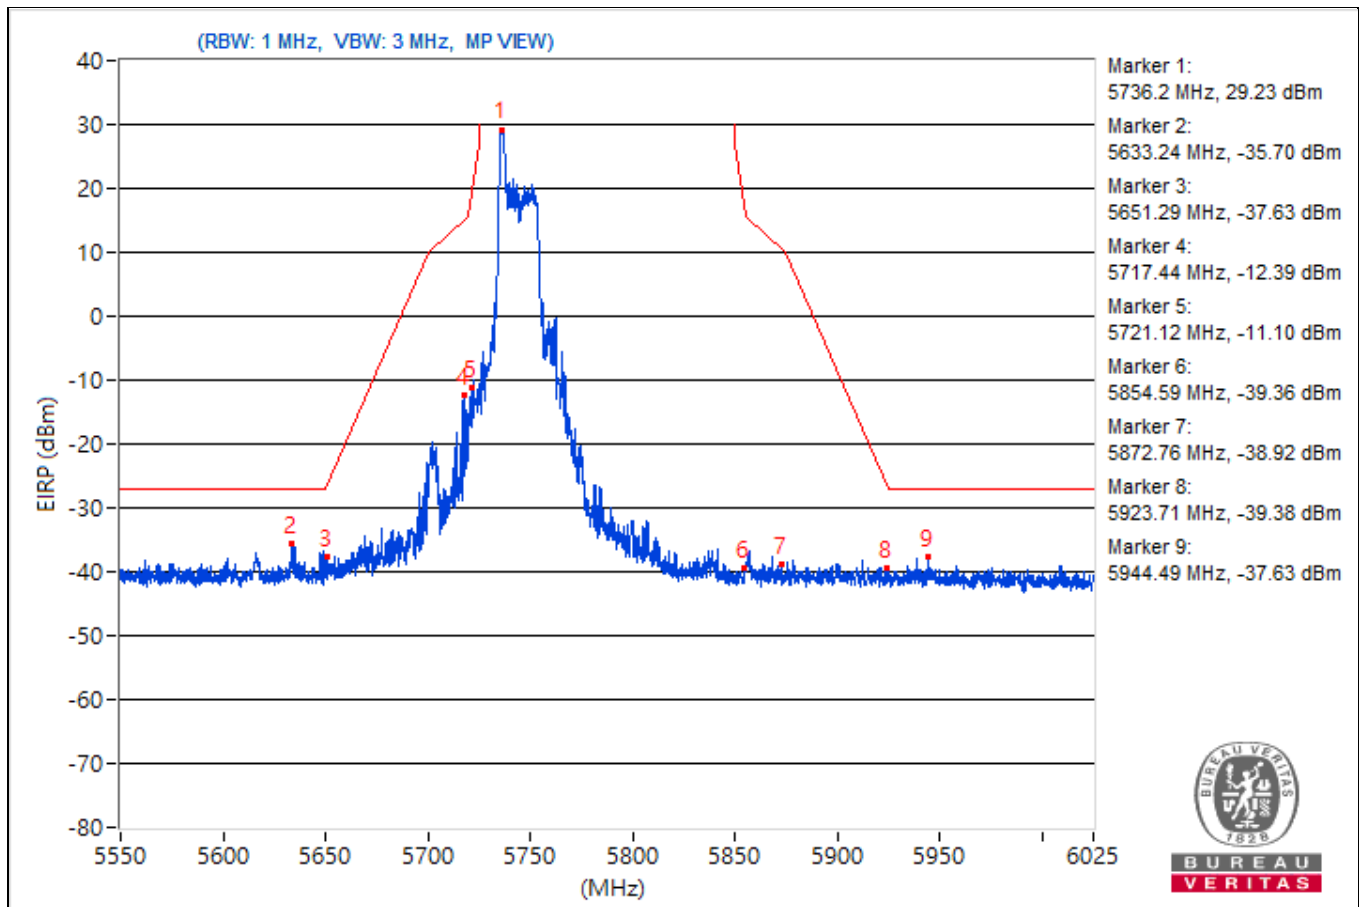


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5833.69	124.42			24.24	4.92	29.16
2	#5604.15	57.15	68.26	-11.11	-43.03	4.92	-38.11
3	#5650.23	55.28	68.43	-13.15	-44.9	4.92	-39.98
4	#5700.69	55.89	105.45	-49.56	-44.29	4.92	-39.37
5	#5720.05	54.37	110.97	-56.6	-45.81	4.92	-40.89
6	#5851.51	82.93	118.83	-35.9	-17.25	4.92	-12.33
7	#5865.4	77.71	107.95	-30.24	-22.47	4.92	-17.55
8	#5924.42	55.28	68.69	-13.41	-44.9	4.92	-39.98
9	#5953.39	57.03	68.26	-11.23	-43.15	4.92	-38.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

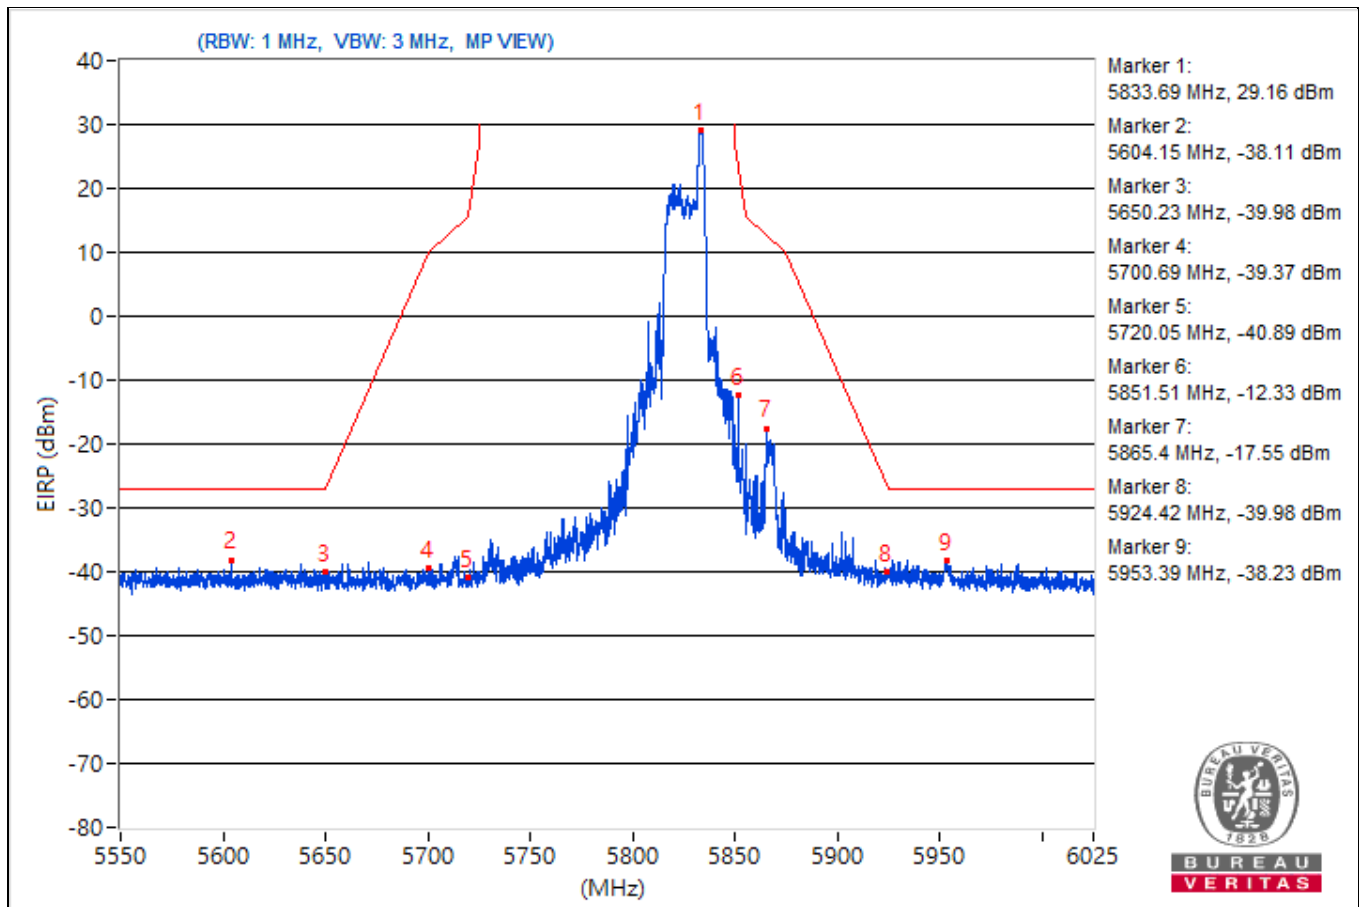


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5171.58	121.03 PK			20.85	4.92	25.77
2	*5171.58	111.07 AV			10.89	4.92	15.81
3	5148.3	59.48 PK	74	-14.52	-40.7	4.92	-35.78
4	5148.3	48.6 AV	54	-5.4	-51.58	4.92	-46.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

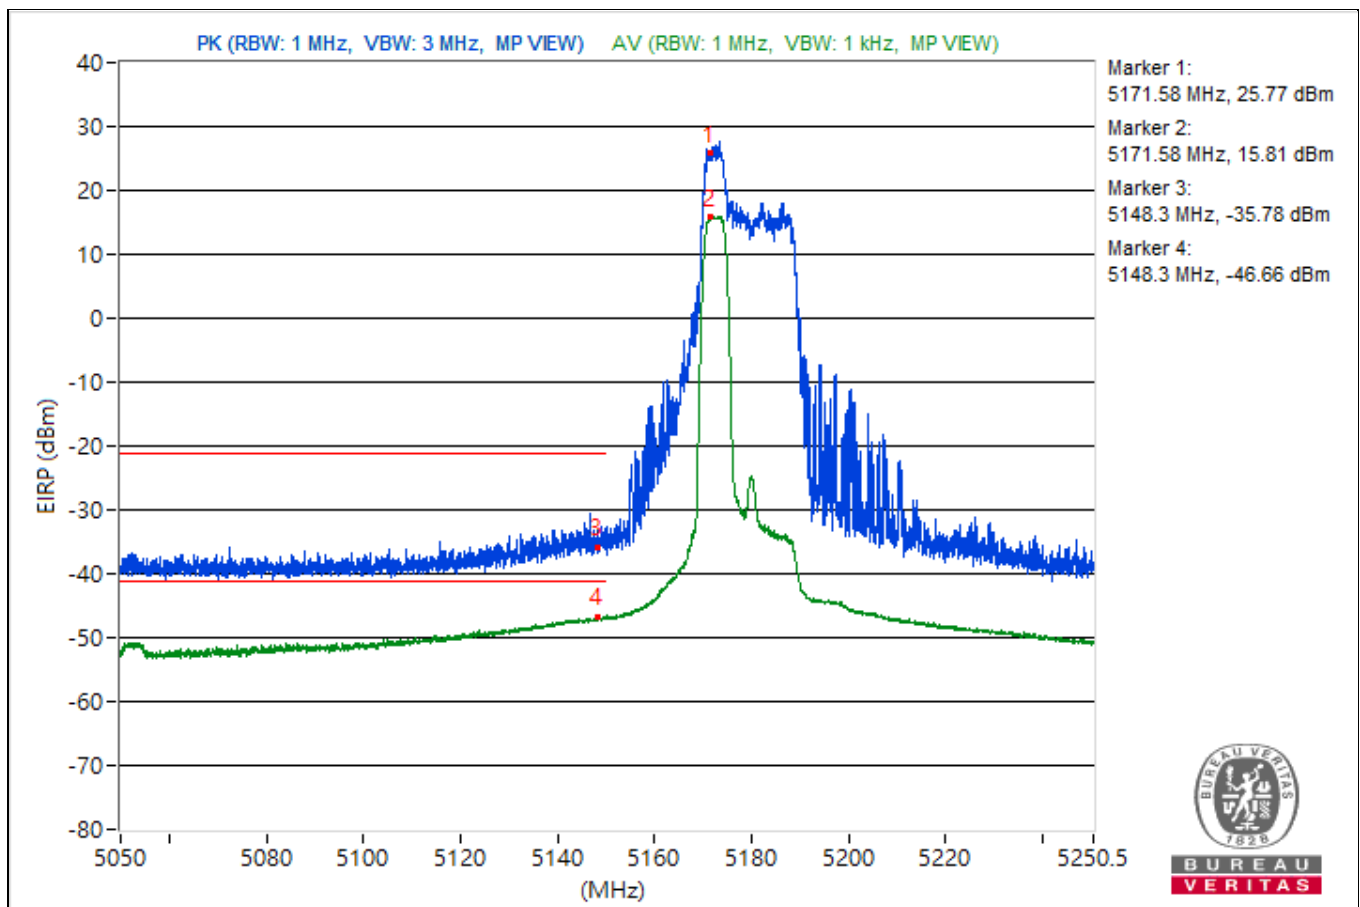


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5327.57	120.32 PK			20.14	4.92	25.06
2	*5327.57	110.58 AV			10.4	4.92	15.32
3	5350	57.71 PK	74	-16.29	-42.47	4.92	-37.55
4	5350	46.56 AV	54	-7.44	-53.62	4.92	-48.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

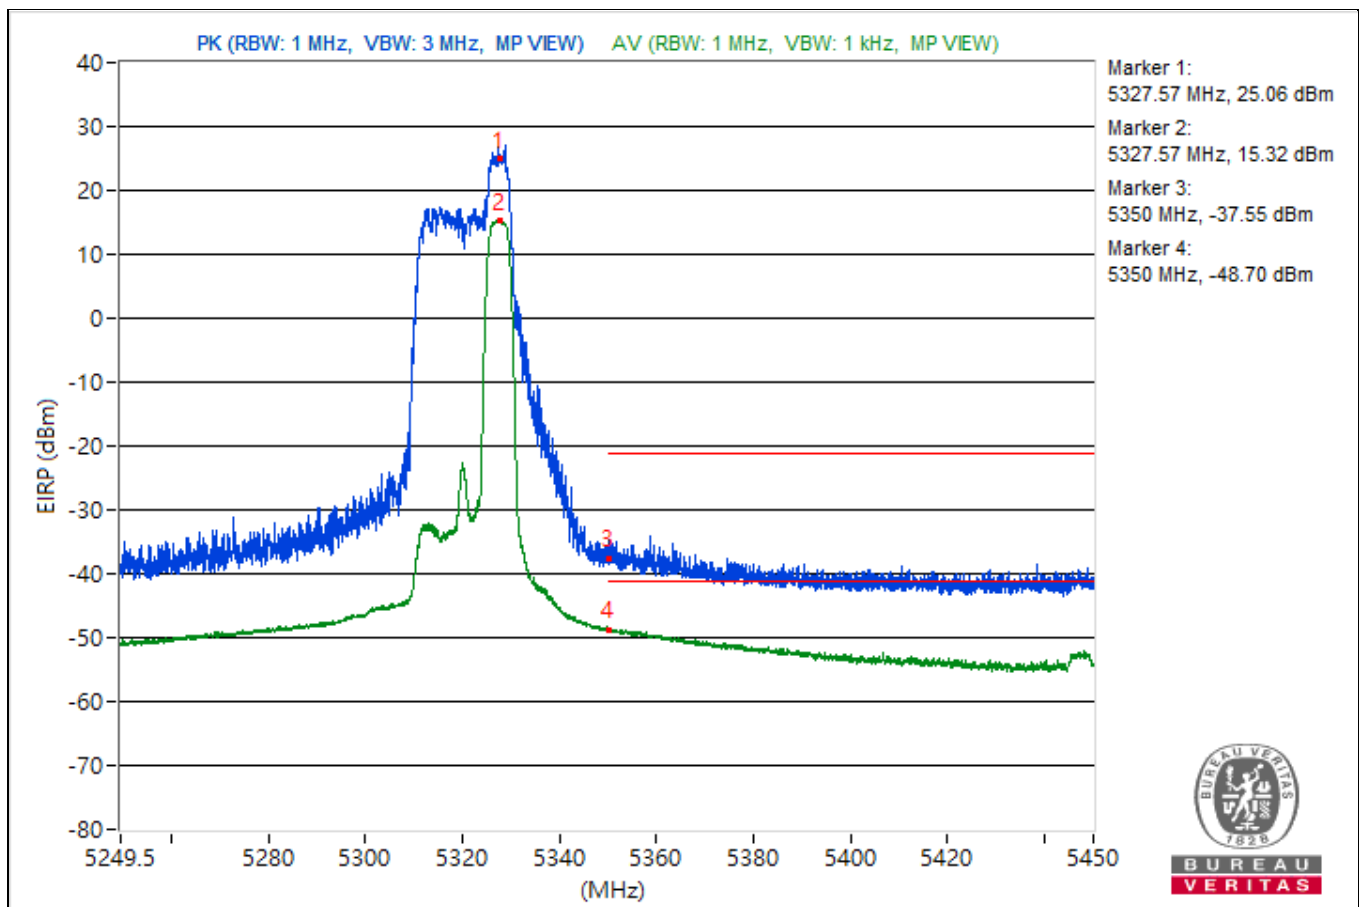


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5493.62	122.52 PK			22.34	4.92	27.26
2	*5492.02	110.94 AV			10.76	4.92	15.68
3	5456.67	59.81 PK	74	-14.19	-40.37	4.92	-35.45
4	5457.86	46.89 AV	54	-7.11	-53.29	4.92	-48.37
5	#5467.08	60.77 PK	68.26	-7.49	-39.41	4.92	-34.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

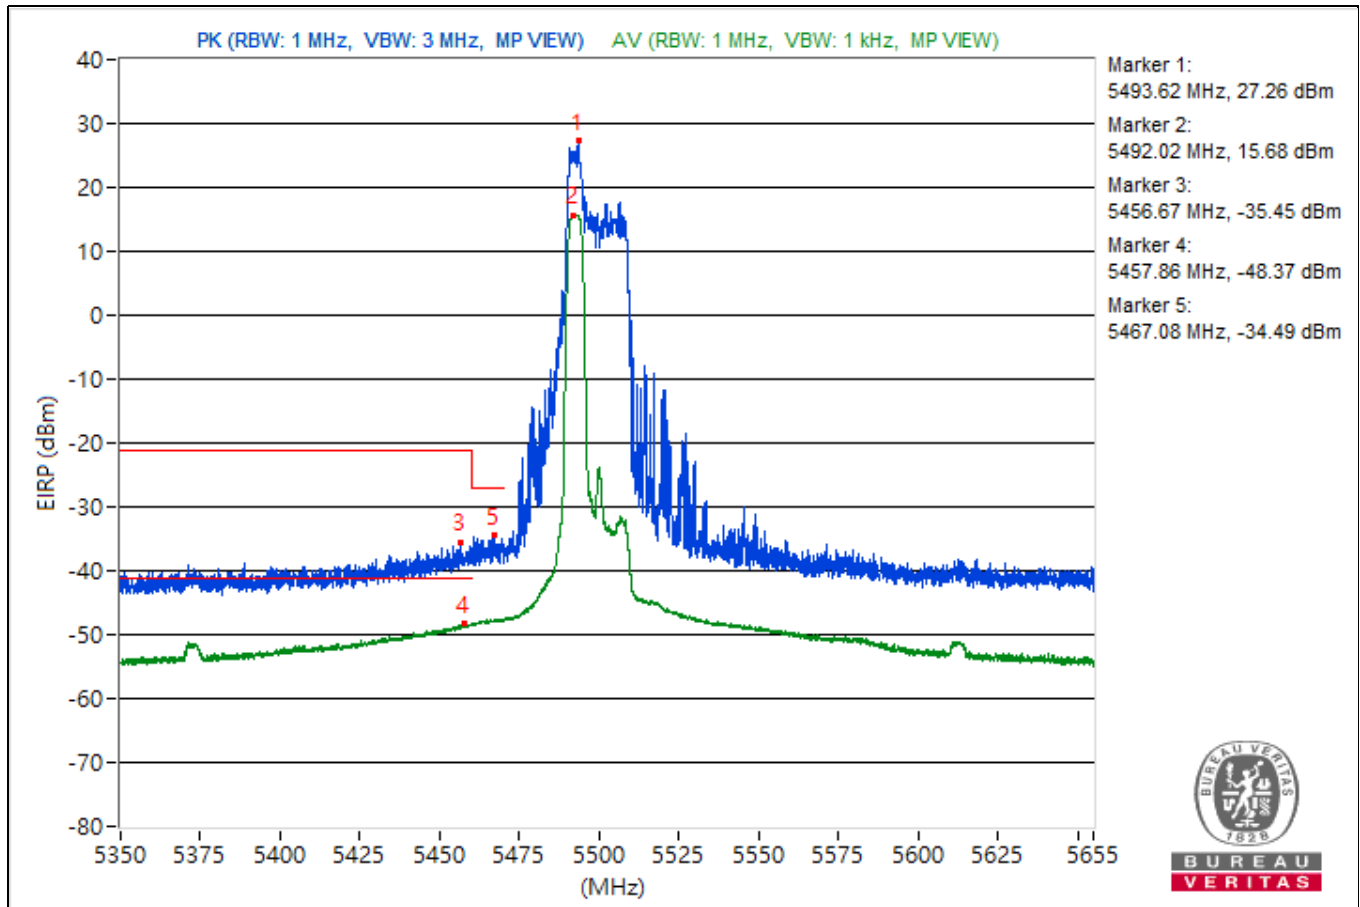


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5706.85	122.36			22.18	4.92	27.1
2	#5736.83	61.5	68.26	-6.76	-38.68	4.92	-33.76

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

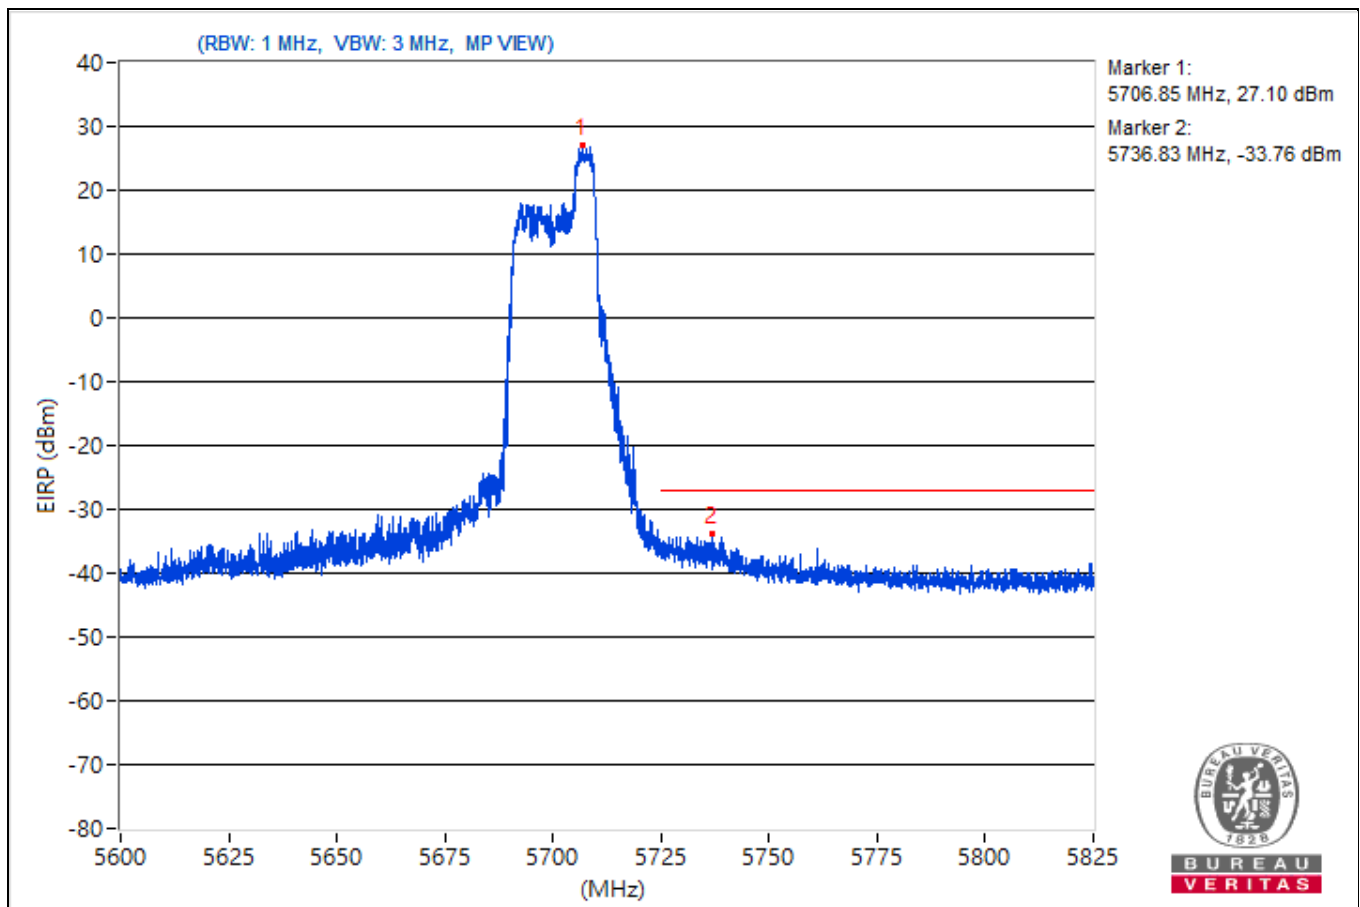


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5726.69	120.65			20.47	4.92	25.39
2	#5909.79	57.36	68.26	-10.9	-42.82	4.92	-37.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

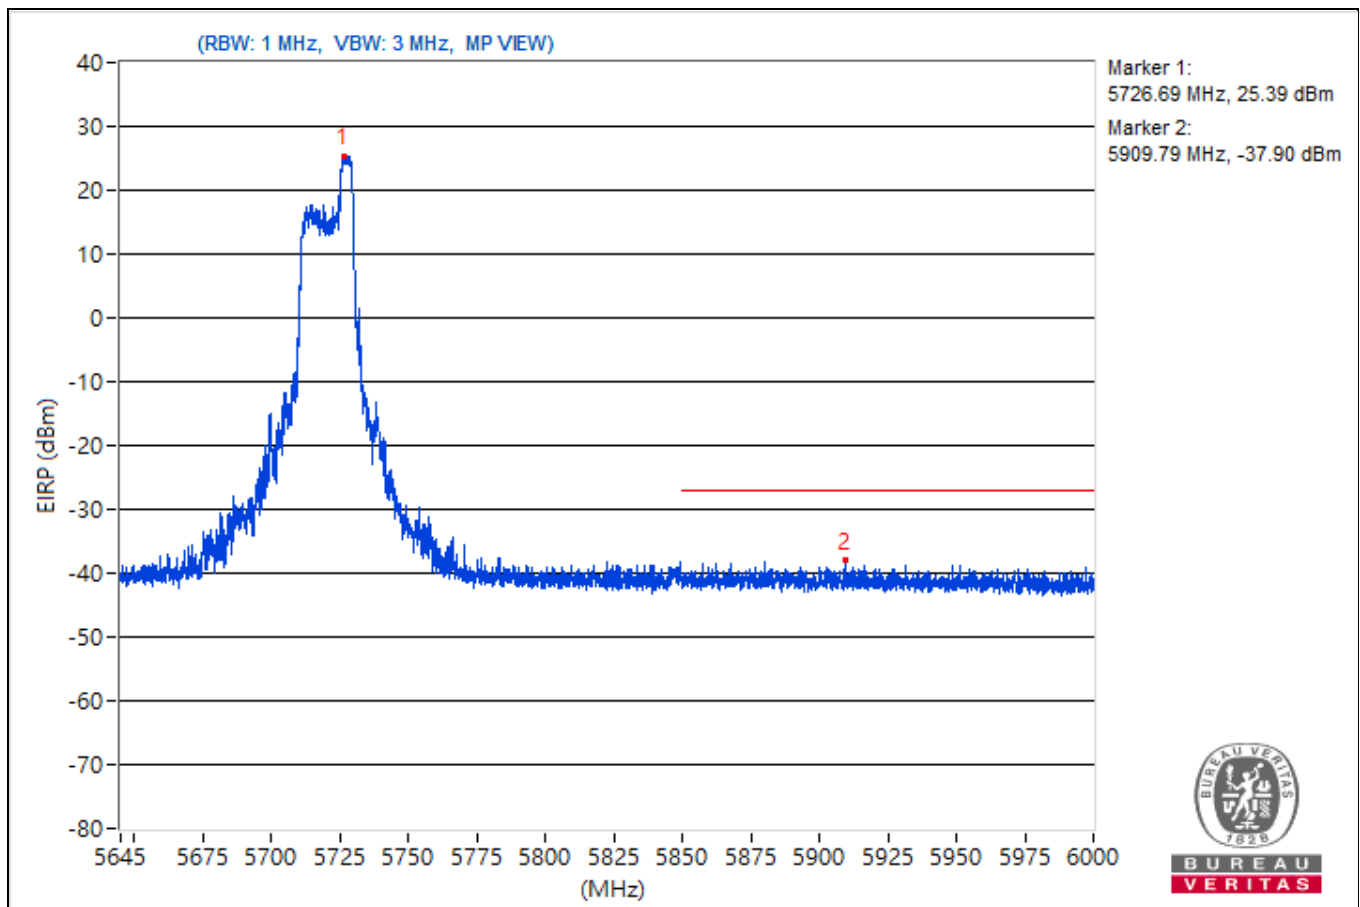


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5736.79	123.12			22.94	4.92	27.86
2	#5649.87	58.57	68.26	-9.69	-41.61	4.92	-36.69
3	#5650.7	58.33	68.78	-10.45	-41.85	4.92	-36.93
4	#5717.56	83.23	110.18	-26.95	-16.95	4.92	-12.03
5	#5721	84.52	113.14	-28.62	-15.66	4.92	-10.74
6	#5854.48	55.8	112.06	-56.26	-44.38	4.92	-39.46
7	#5872.76	55.58	105.89	-50.31	-44.6	4.92	-39.68
8	#5923.71	55.61	69.22	-13.61	-44.57	4.92	-39.65
9	#5927.27	56.36	68.26	-11.9	-43.82	4.92	-38.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

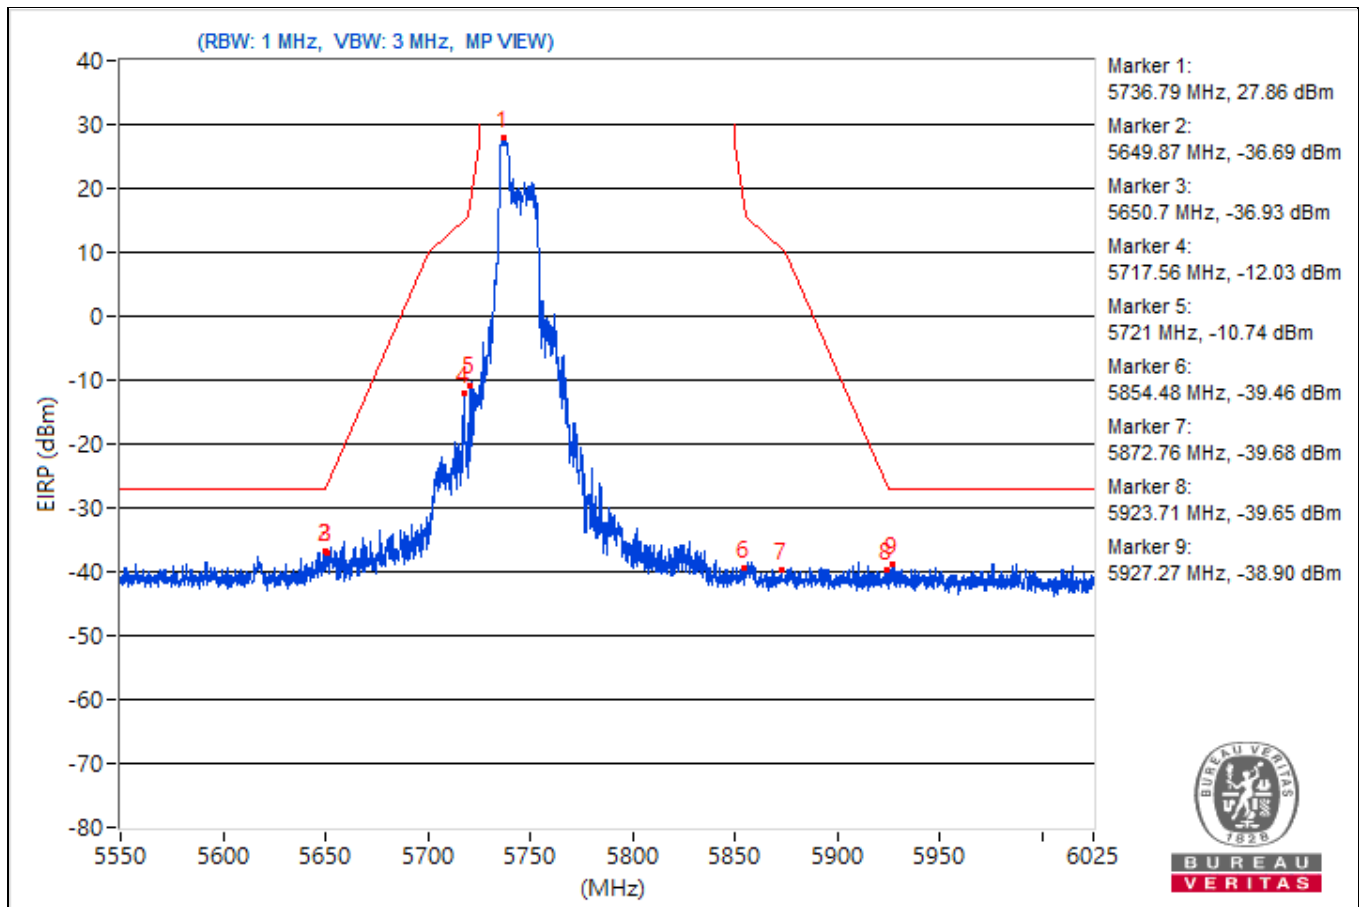


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5832.74	123.88			23.7	4.92	28.62
2	#5564.84	56.69	68.26	-11.57	-43.49	4.92	-38.57
3	#5649.99	55.43	68.26	-12.83	-44.75	4.92	-39.83
4	#5700.57	55.98	105.42	-49.44	-44.2	4.92	-39.28
5	#5720.05	55.26	110.97	-55.71	-44.92	4.92	-40
6	#5852.46	76.36	116.66	-40.3	-23.82	4.92	-18.9
7	#5862.55	76.8	108.75	-31.95	-23.38	4.92	-18.46
8	#5924.06	57.83	68.95	-11.12	-42.35	4.92	-37.43
9	#5952.21	57.82	68.26	-10.44	-42.36	4.92	-37.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

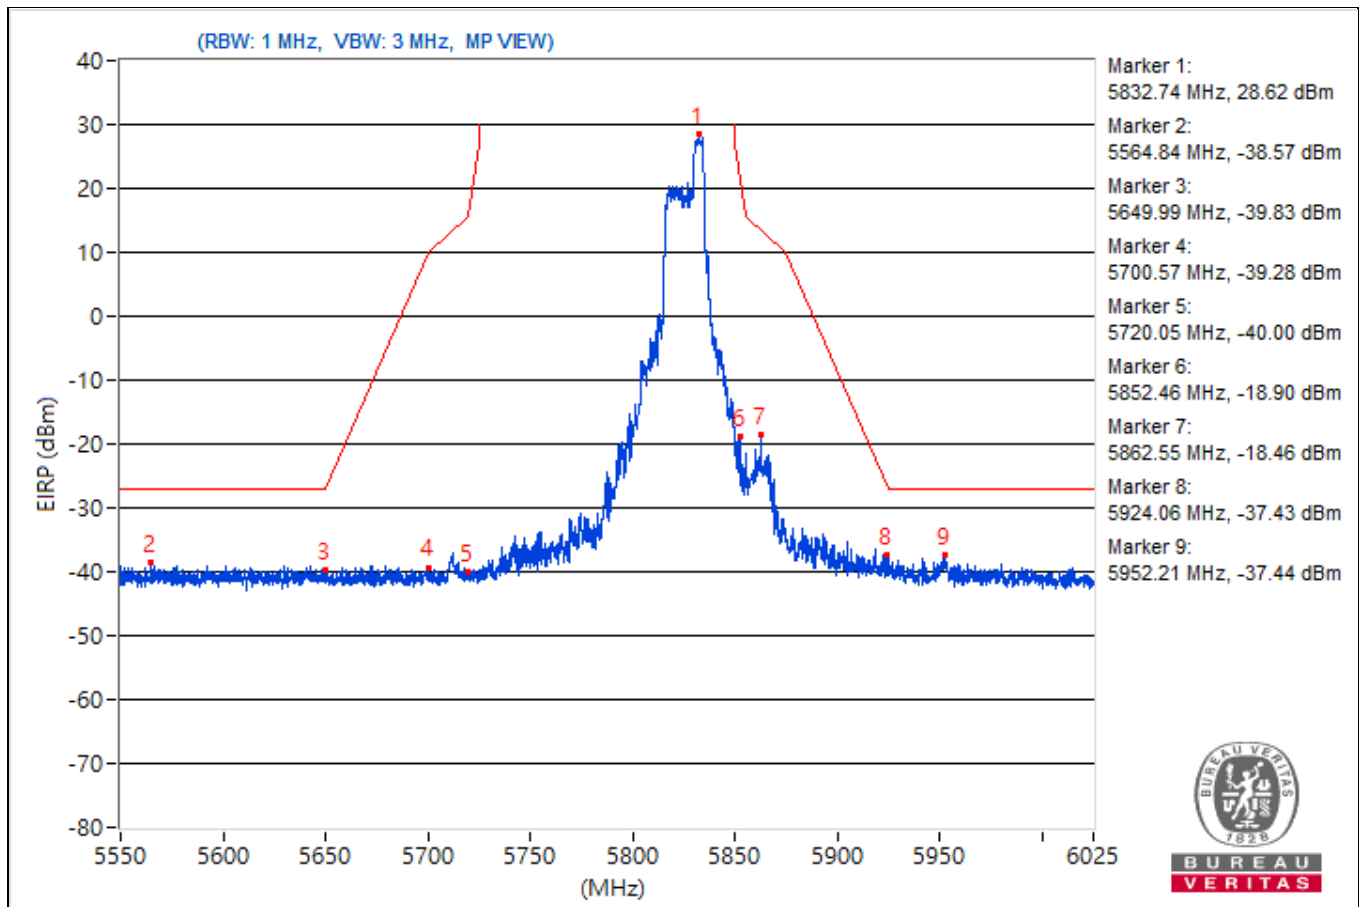


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5177.12	119.47 PK			19.29	4.92	24.21
2	*5177.12	109.04 AV			8.86	4.92	13.78
3	5149.65	64.19 PK	74	-9.81	-35.99	4.92	-31.07
4	5149.65	50.3 AV	54	-3.7	-49.88	4.92	-44.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

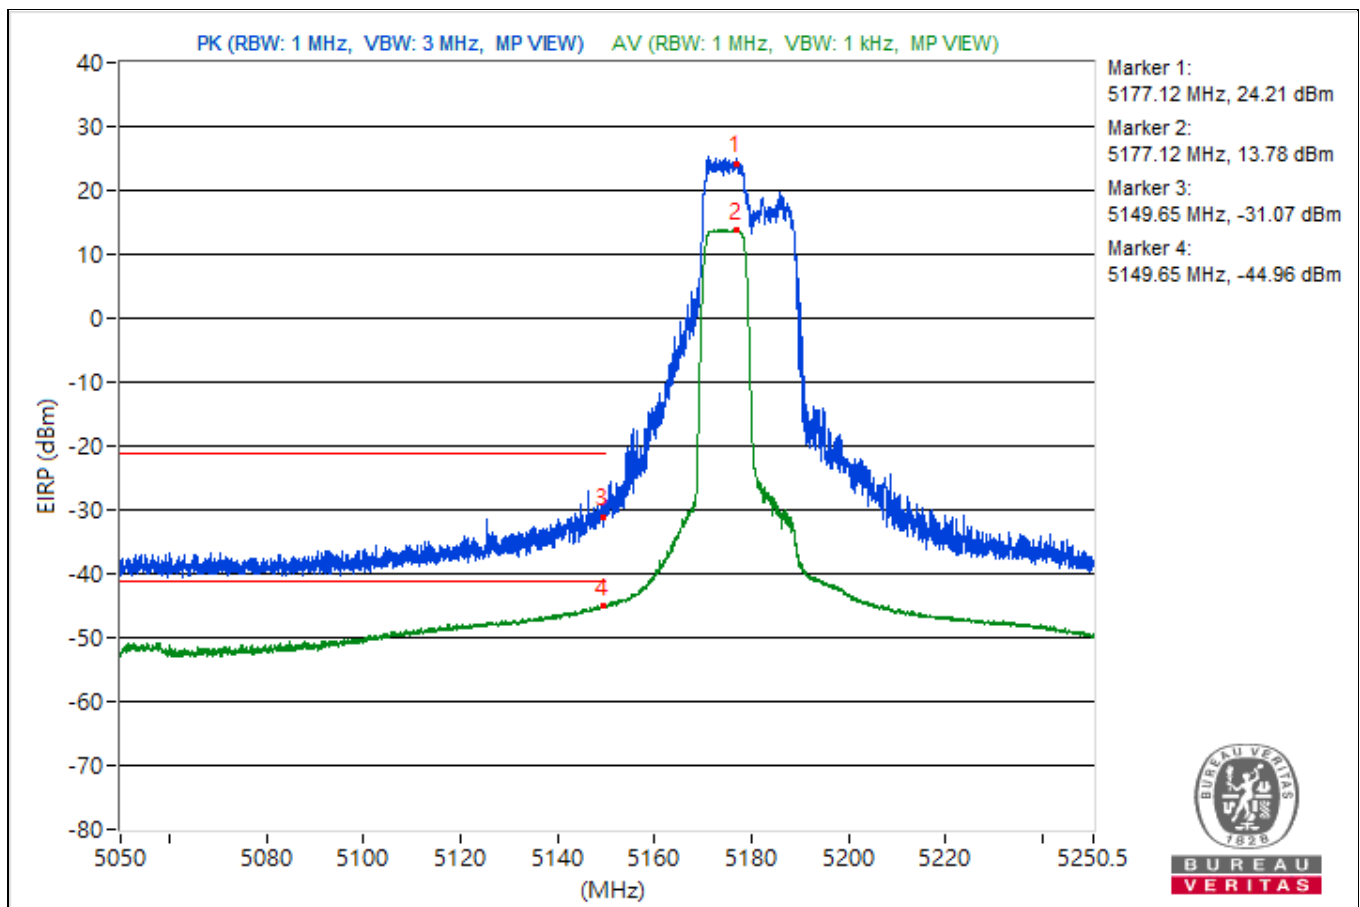


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5327.07	120.17 PK			19.99	4.92	24.91
2	*5327.07	109.14 AV			8.96	4.92	13.88
3	5350.45	70.23 PK	74	-3.77	-29.95	4.92	-25.03
4	5350.45	51.11 AV	54	-2.89	-49.07	4.92	-44.15

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

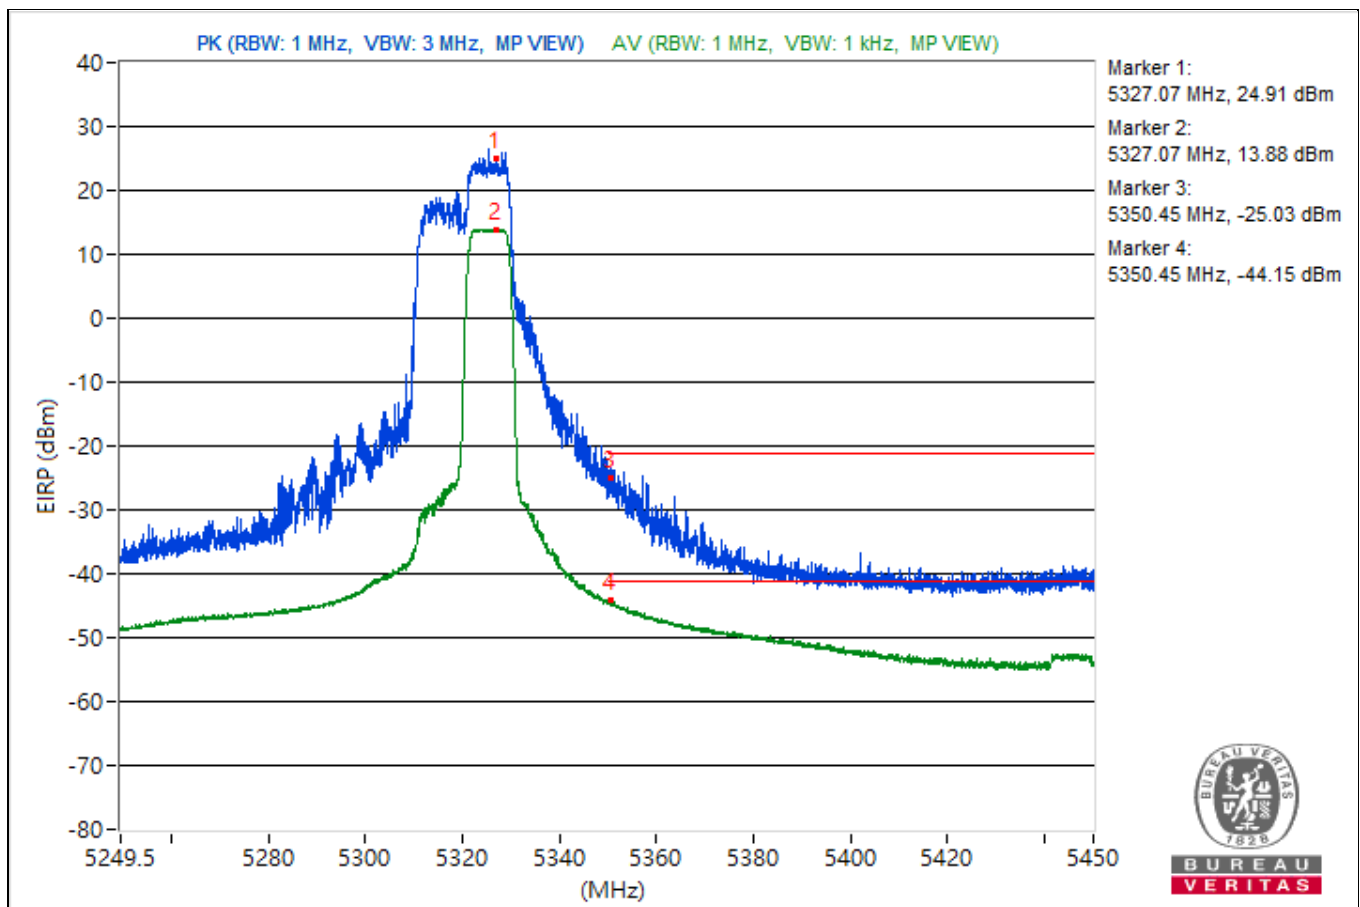


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5497.24	120.01 PK			19.83	4.92	24.75
2	*5493.58	108.82 AV			8.64	4.92	13.56
3	5453.36	61.57 PK	74	-12.43	-38.61	4.92	-33.69
4	5458.31	47.74 AV	54	-6.26	-52.44	4.92	-47.52
5	#5468.53	63.01 PK	68.26	-5.25	-37.17	4.92	-32.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

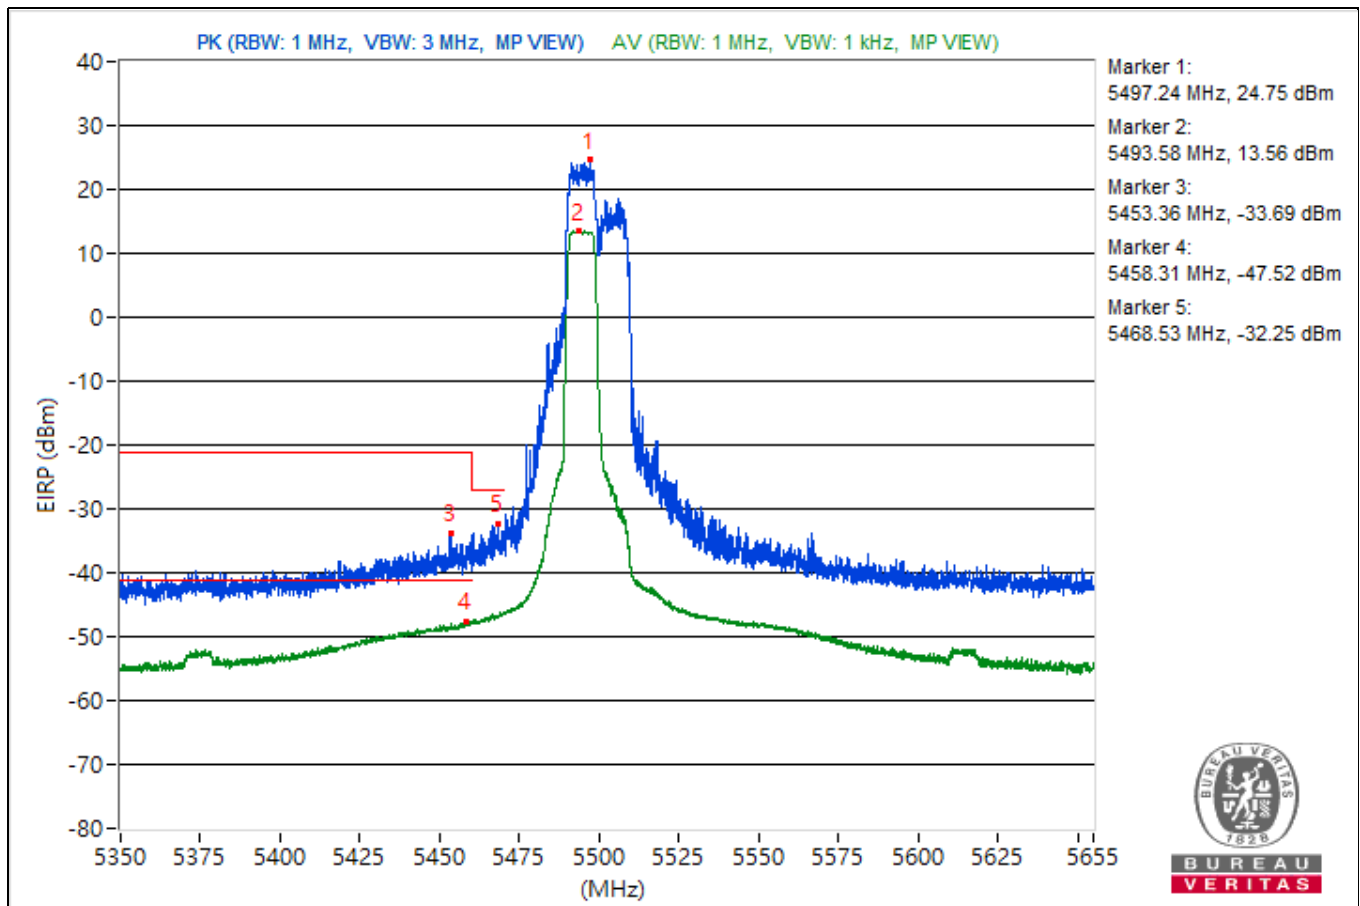


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5702.15	120.84			20.66	4.92	25.58
2	#5728.87	66.17	68.26	-2.09	-34.01	4.92	-29.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

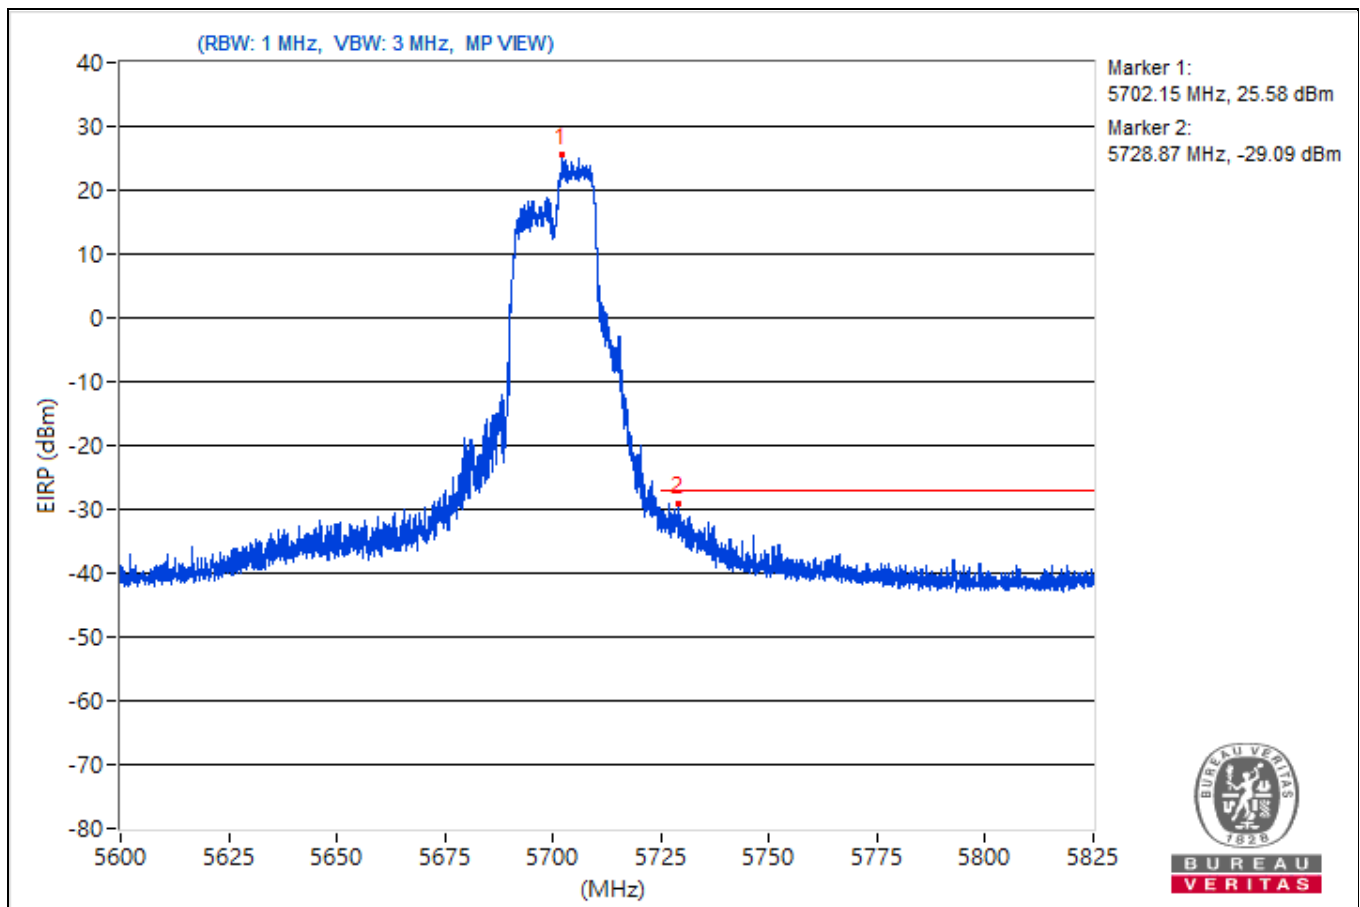


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5728.51	120.6			20.42	4.92	25.34
2	#5858.13	57.13	68.26	-11.13	-43.05	4.92	-38.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

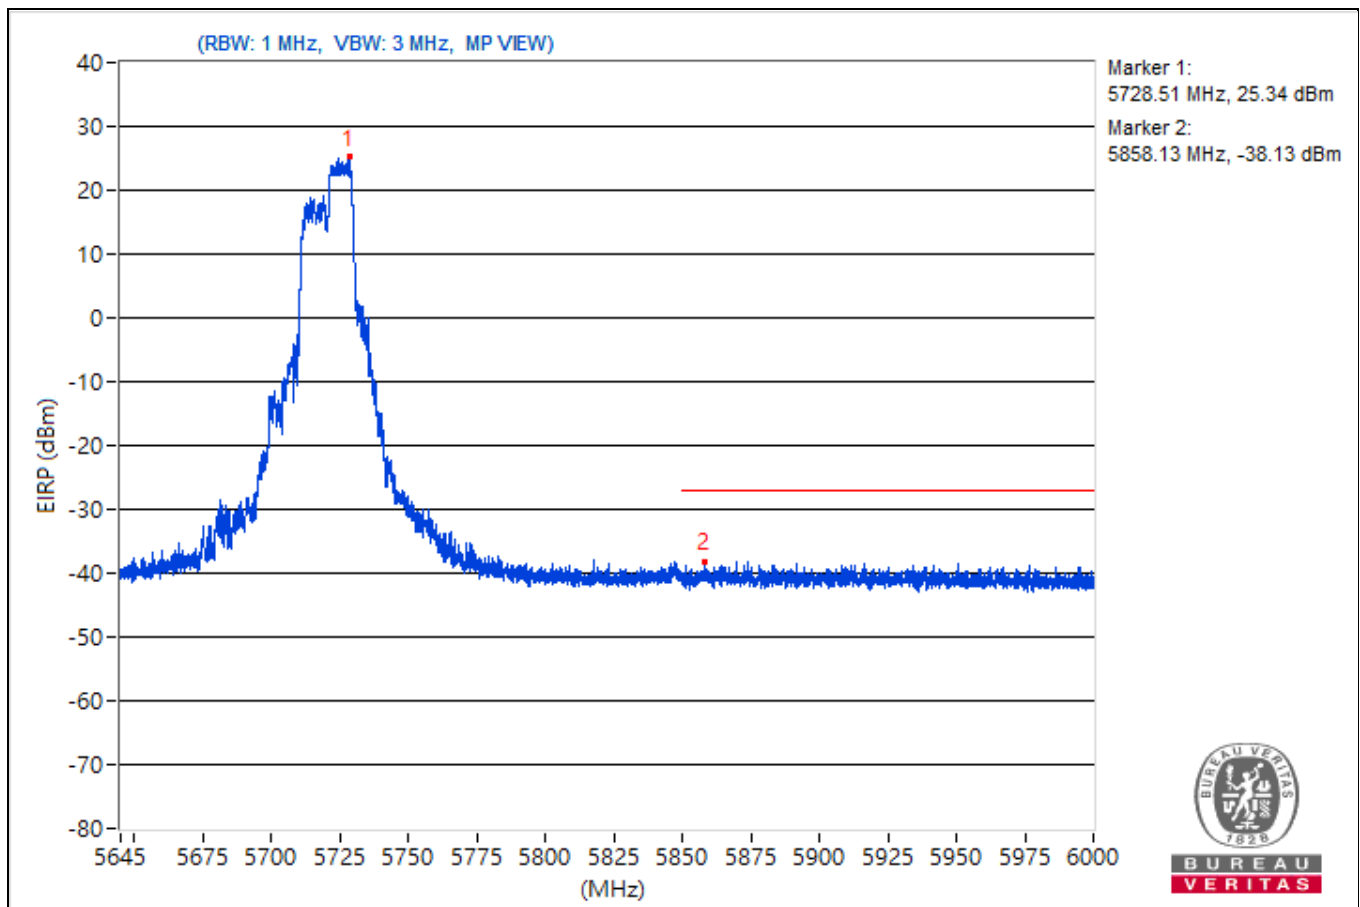


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5742.85	122.52			22.34	4.92	27.26
2	#5617.45	58.13	68.26	-10.13	-42.05	4.92	-37.13
3	#5651.18	58.25	69.13	-10.88	-41.93	4.92	-37.01
4	#5718.27	79.05	110.38	-31.33	-21.13	4.92	-16.21
5	#5723.85	88.79	119.64	-30.85	-11.39	4.92	-6.47
6	#5854.83	55.25	111.24	-55.99	-44.93	4.92	-40.01
7	#5874.78	55.69	105.32	-49.63	-44.49	4.92	-39.57
8	#5924.77	56.31	68.43	-12.12	-43.87	4.92	-38.95
9	#5956.36	56.81	68.26	-11.45	-43.37	4.92	-38.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

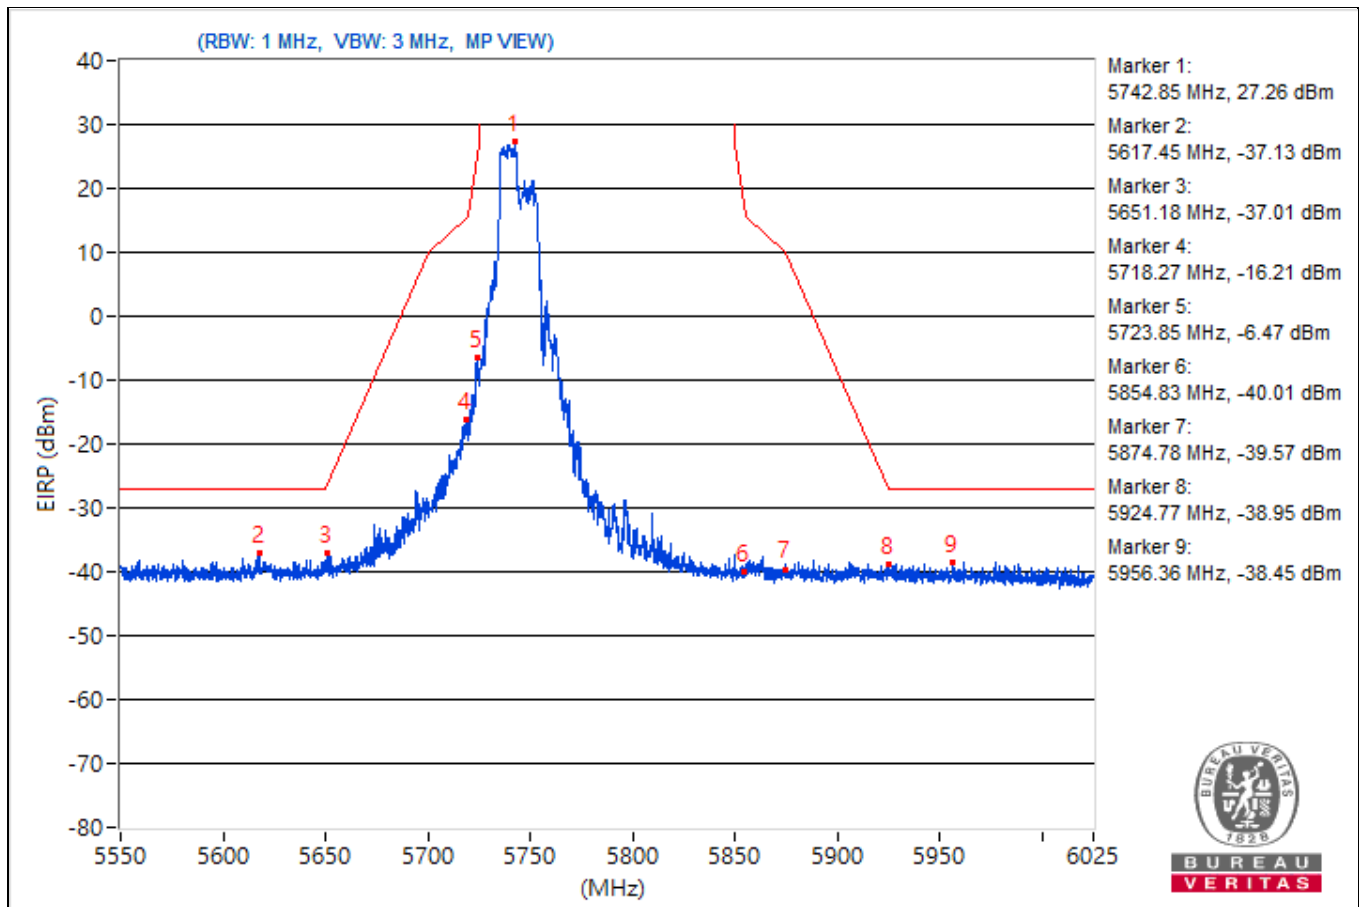


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5830.01	121.09			20.91	4.92	25.83
2	#5586.69	56.68	68.26	-11.58	-43.5	4.92	-38.58
3	#5650.11	54.72	68.34	-13.62	-45.46	4.92	-40.54
4	#5700.34	55.54	105.35	-49.81	-44.64	4.92	-39.72
5	#5720.05	53.64	110.97	-57.33	-46.54	4.92	-41.62
6	#5853.88	76.32	113.41	-37.09	-23.86	4.92	-18.94
7	#5860.53	73.91	109.31	-35.4	-26.27	4.92	-21.35
8	#5923.59	55.4	69.31	-13.91	-44.78	4.92	-39.86
9	#5930.71	57.33	68.26	-10.93	-42.85	4.92	-37.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

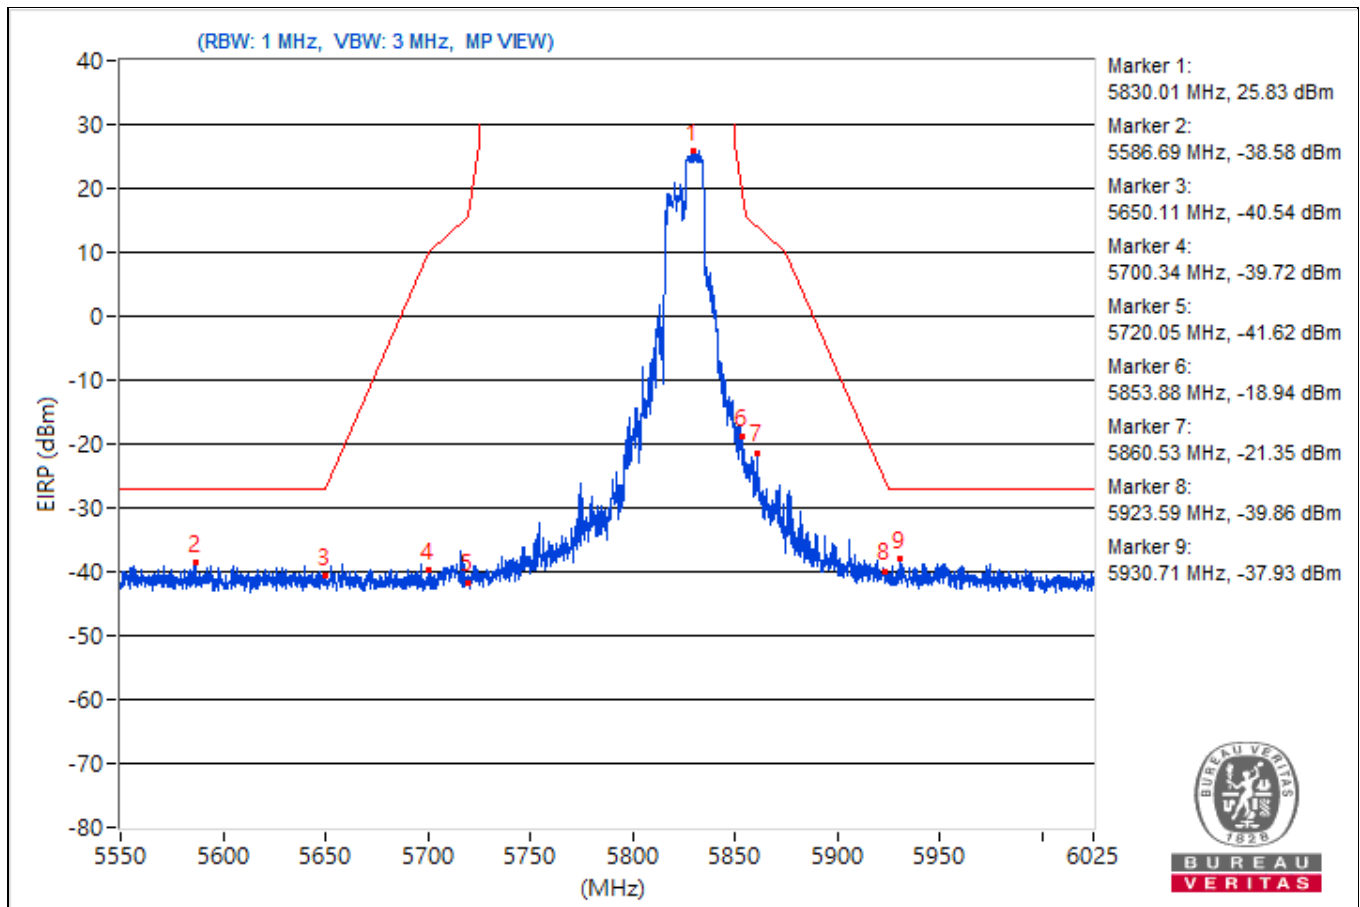


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5173.86	119.6 PK			19.42	4.92	24.34
2	*5173.86	109.49 AV			9.31	4.92	14.23
3	5149.9	70.07 PK	74	-3.93	-30.11	4.92	-25.19
4	5149.9	52.17 AV	54	-1.83	-48.01	4.92	-43.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

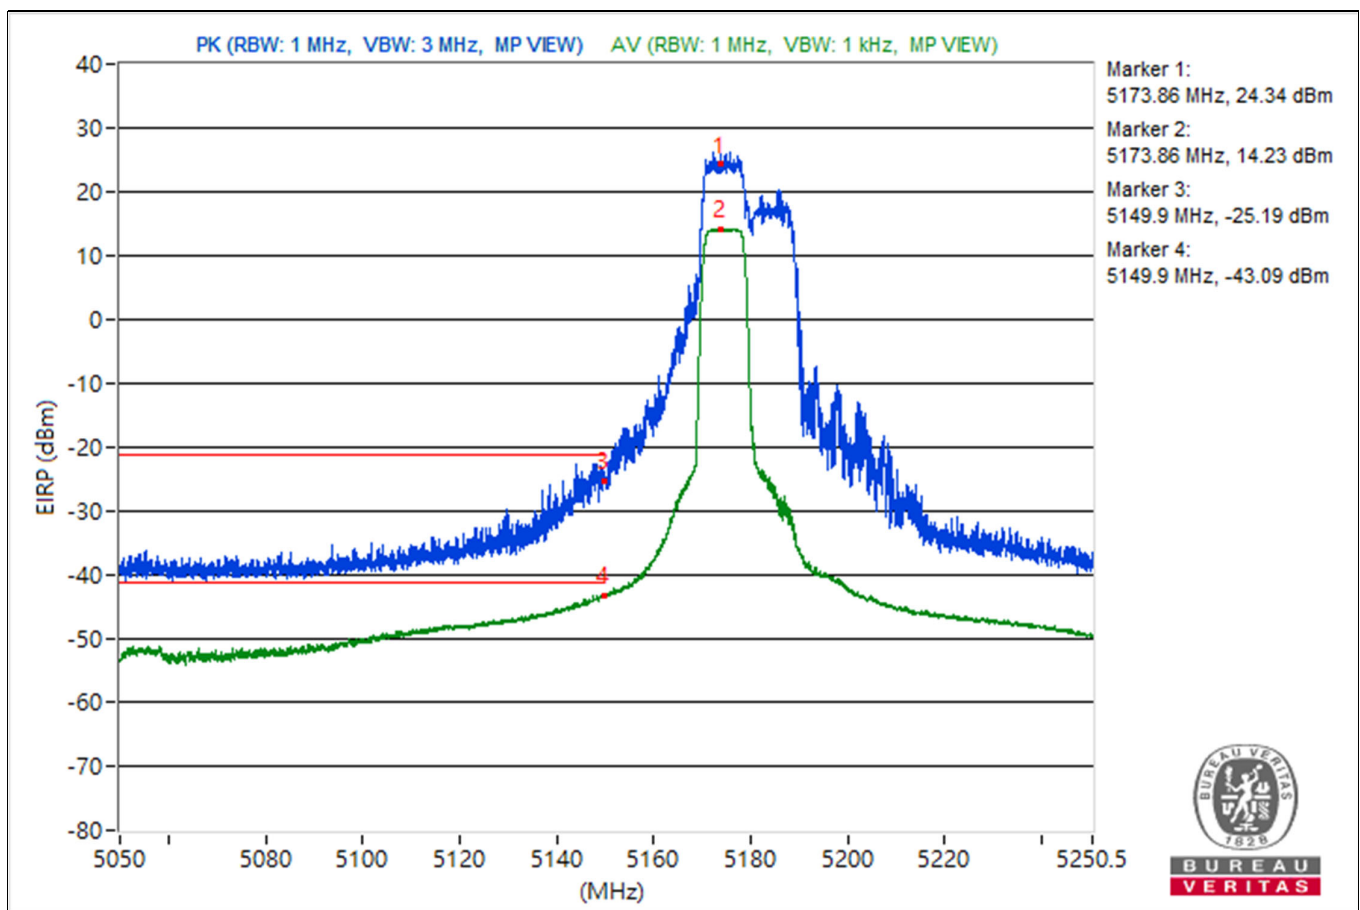


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5323.51	119.17 PK			18.99	4.92	23.91
2	*5323.51	110.31 AV			10.13	4.92	15.05
3	5350.18	68.77 PK	74	-5.23	-31.41	4.92	-26.49
4	5350.18	49.62 AV	54	-4.38	-50.56	4.92	-45.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

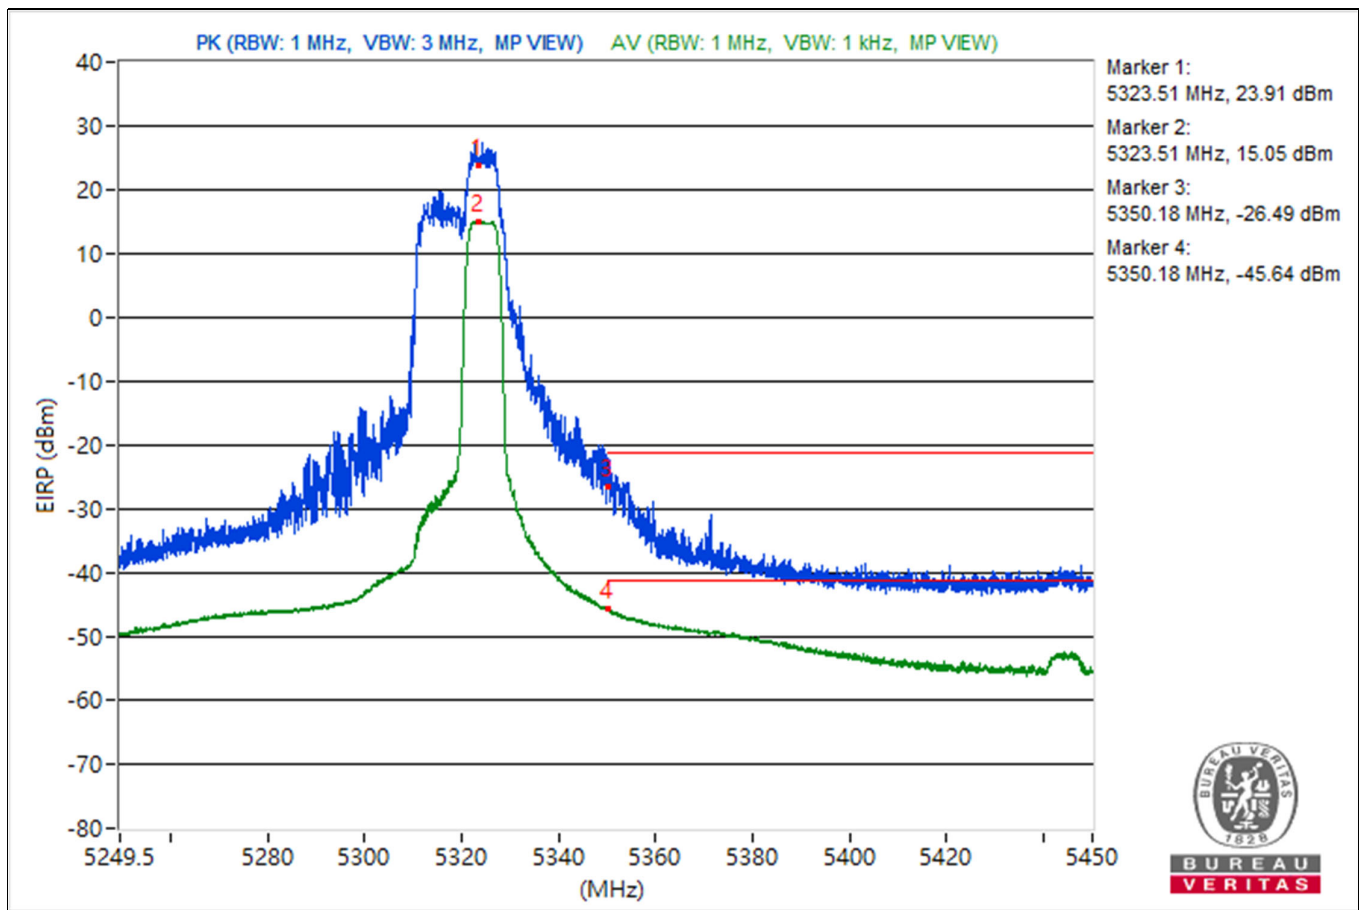


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5493.05	121.51 PK			21.33	4.92	26.25
2	*5496.44	109.83 AV			9.65	4.92	14.57
3	5456.64	62.13 PK	74	-11.87	-38.05	4.92	-33.13
4	5459.8	47.32 AV	54	-6.68	-52.86	4.92	-47.94
5	#5466.13	62.63 PK	68.26	-5.63	-37.55	4.92	-32.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

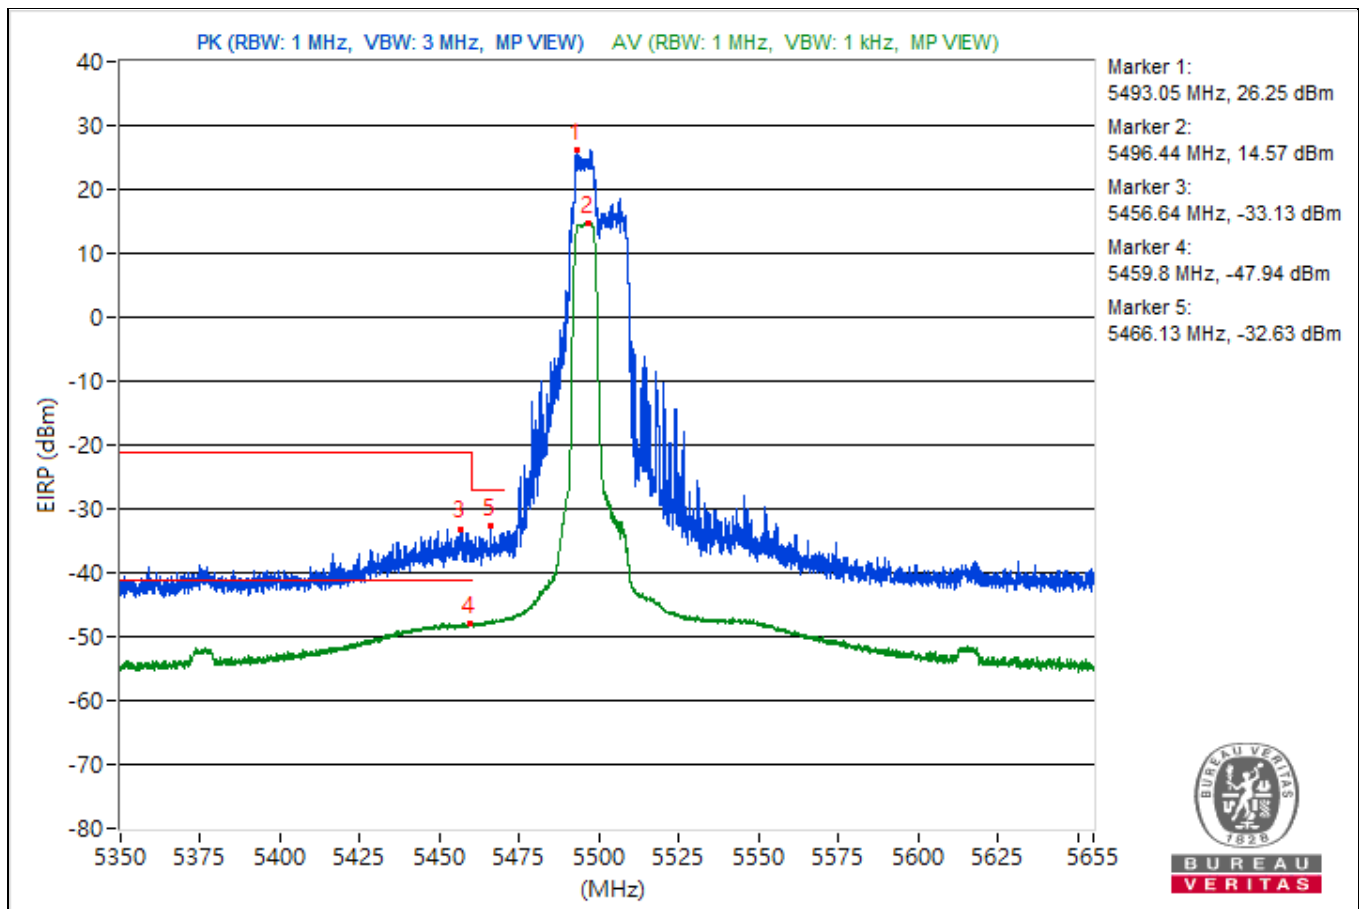


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5703.73	121.78			21.6	4.92	26.52
2	#5726.51	66.79	68.26	-1.47	-33.39	4.92	-28.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

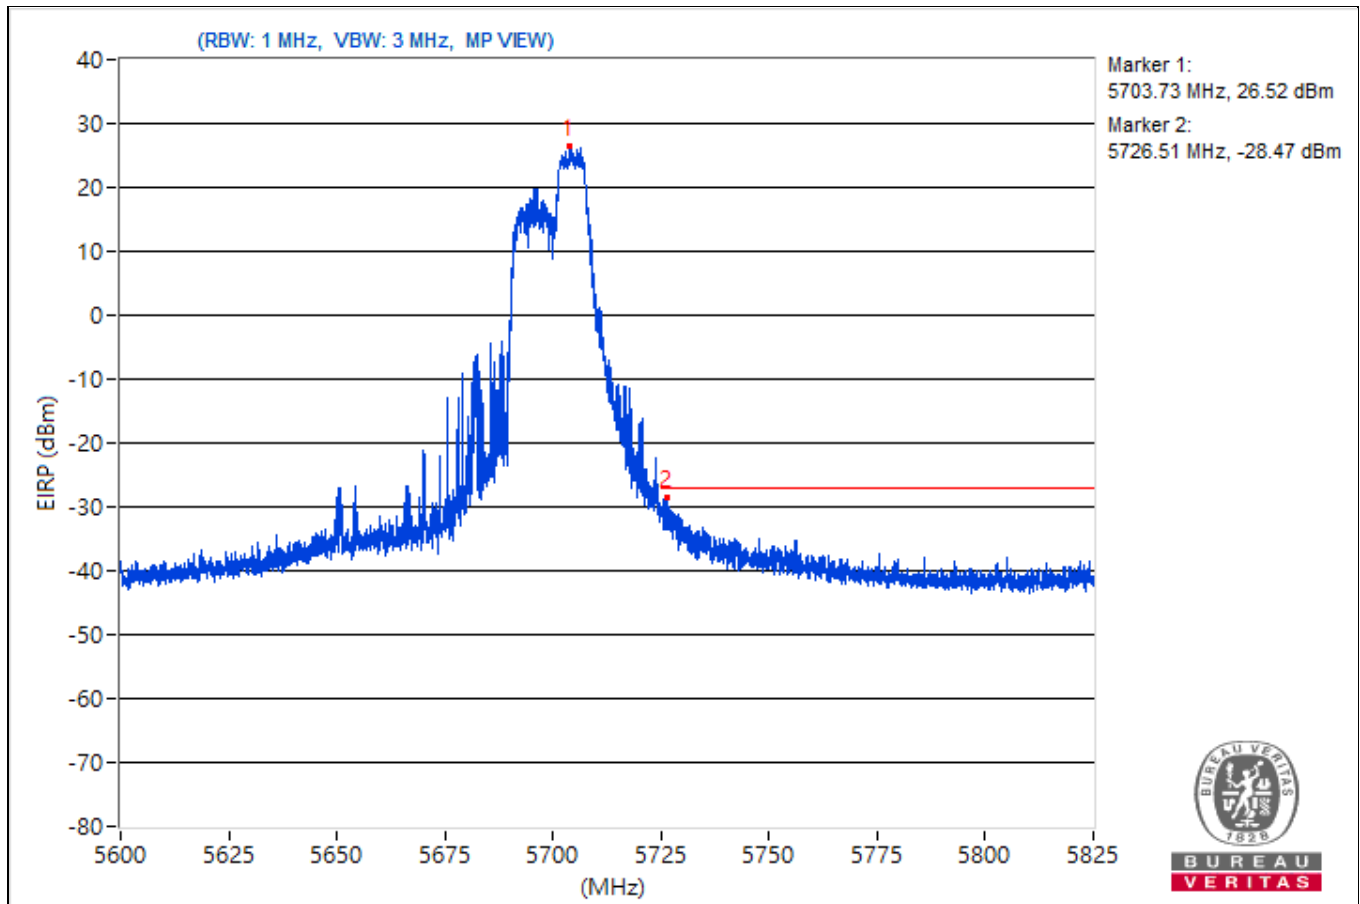


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5722.88	121.32			21.14	4.92	26.06
2	#5872.11	57.02	68.26	-11.24	-43.16	4.92	-38.24

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

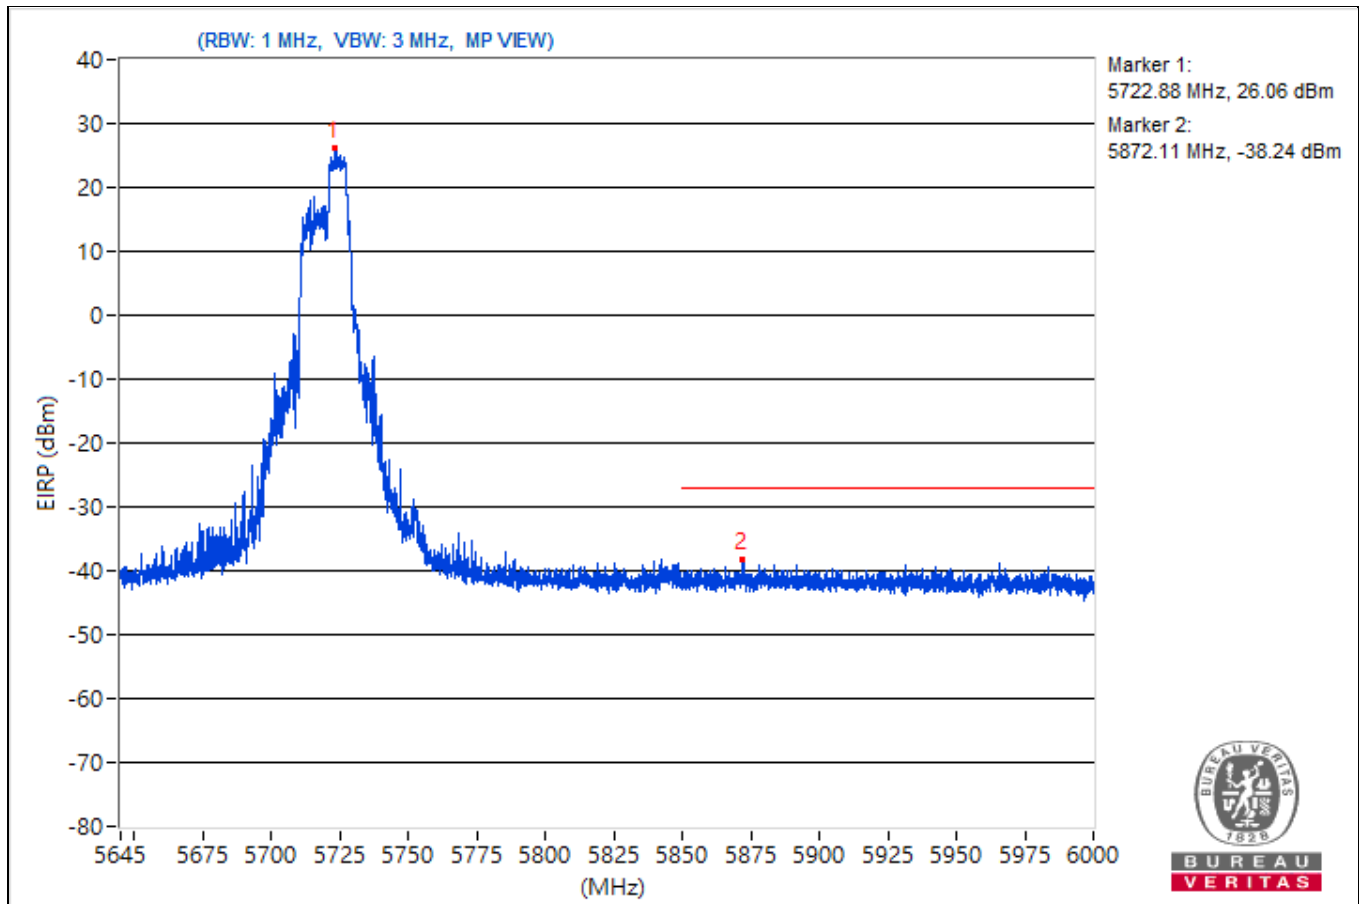


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5739.05	121.44			21.26	4.92	26.18
2	#5581.94	56.97	68.26	-11.29	-43.21	4.92	-38.29
3	#5652.48	58.31	70.1	-11.79	-41.87	4.92	-36.95
4	#5717.2	76.54	110.08	-33.54	-23.64	4.92	-18.72
5	#5724.09	85.1	120.18	-35.08	-15.08	4.92	-10.16
6	#5854.71	54.66	111.52	-56.86	-45.52	4.92	-40.6
7	#5874.07	56.55	105.52	-48.97	-43.63	4.92	-38.71
8	#5924.77	55.18	68.43	-13.25	-45	4.92	-40.08
9	#5988.43	56.55	68.26	-11.71	-43.63	4.92	-38.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

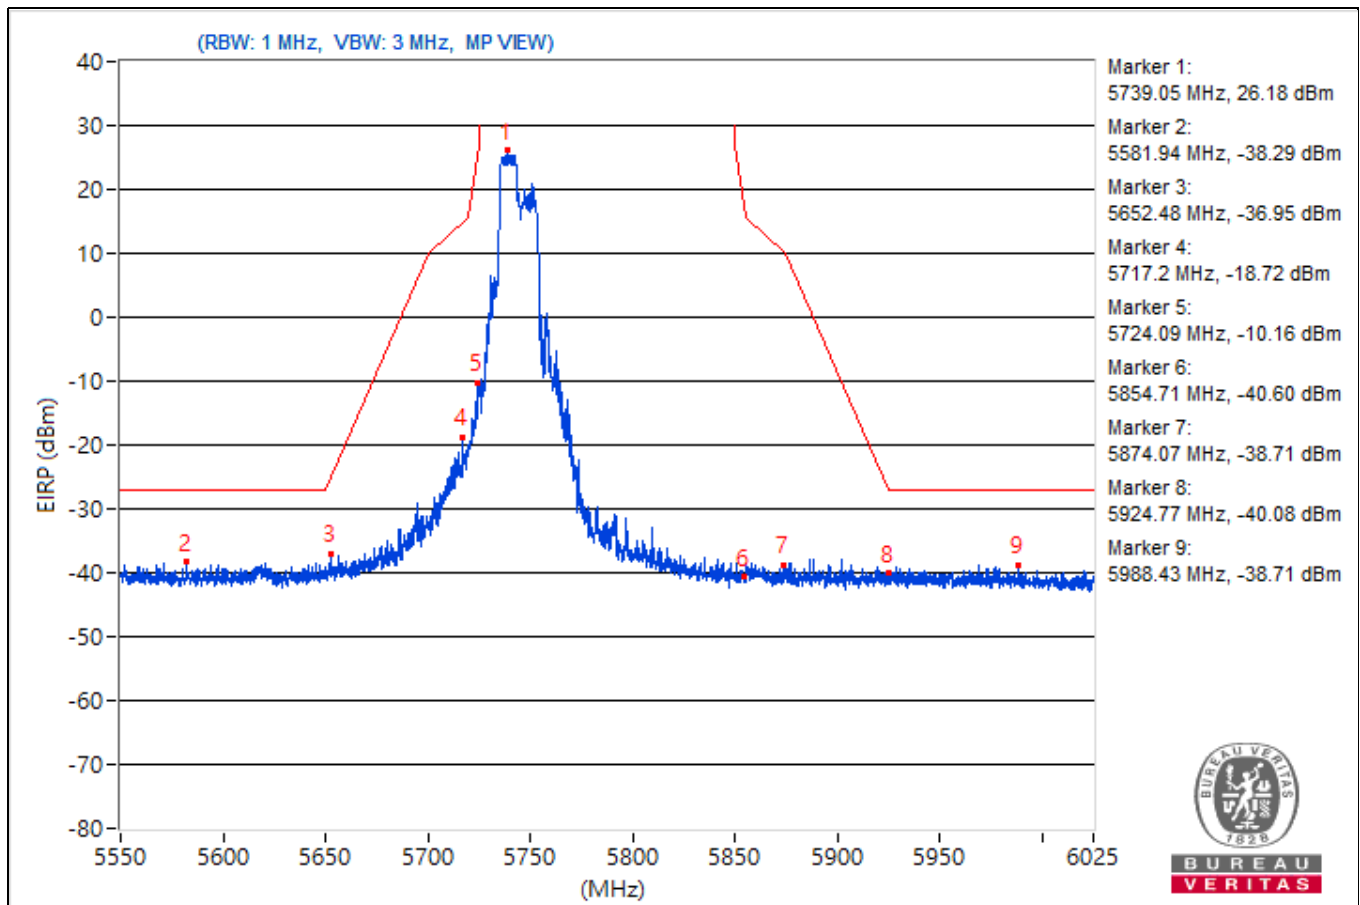


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5830.73	122.87			22.69	4.92	27.61
2	#5586.46	56.64	68.26	-11.62	-43.54	4.92	-38.62
3	#5650.34	55.75	68.51	-12.76	-44.43	4.92	-39.51
4	#5700.69	56.2	105.45	-49.25	-43.98	4.92	-39.06
5	#5720.05	54.33	110.97	-56.64	-45.85	4.92	-40.93
6	#5852.1	81.63	117.47	-35.84	-18.55	4.92	-13.63
7	#5855.19	78.29	110.81	-32.52	-21.89	4.92	-16.97
8	#5924.66	55.24	68.51	-13.27	-44.94	4.92	-40.02
9	#5926.68	57.42	68.26	-10.84	-42.76	4.92	-37.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

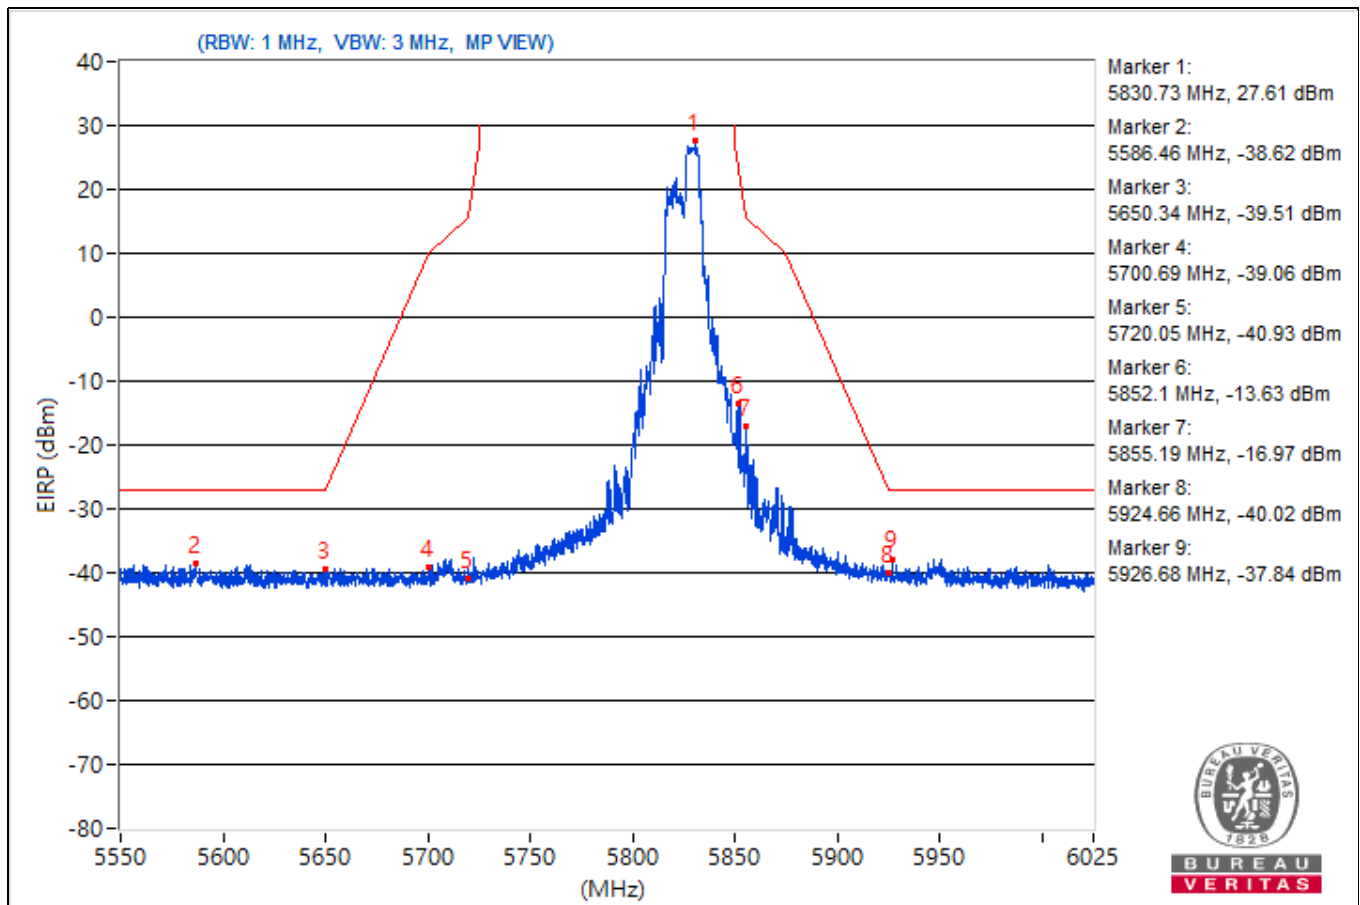


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5178.67	119.19 PK			19.01	4.92	23.93
2	*5178.67	110.06 AV			9.88	4.92	14.8
3	5149.97	65.26 PK	74	-8.74	-34.92	4.92	-30
4	5149.97	51.94 AV	54	-2.06	-48.24	4.92	-43.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

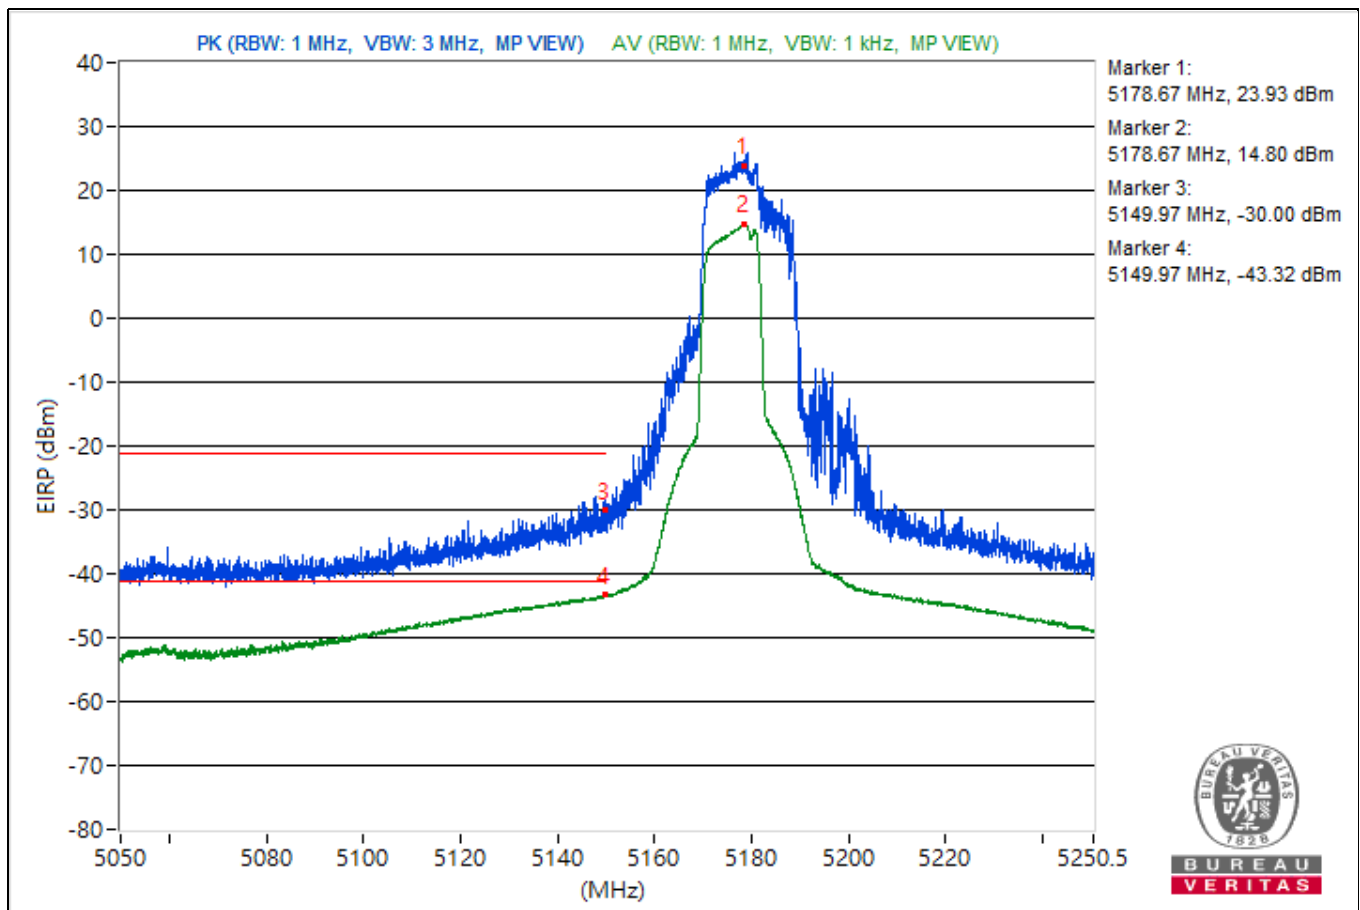


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5321.33	119.14 PK			18.96	4.92	23.88
2	*5321.33	109.21 AV			9.03	4.92	13.95
3	5350.13	60.49 PK	74	-13.51	-39.69	4.92	-34.77
4	5350.13	48.56 AV	54	-5.44	-51.62	4.92	-46.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

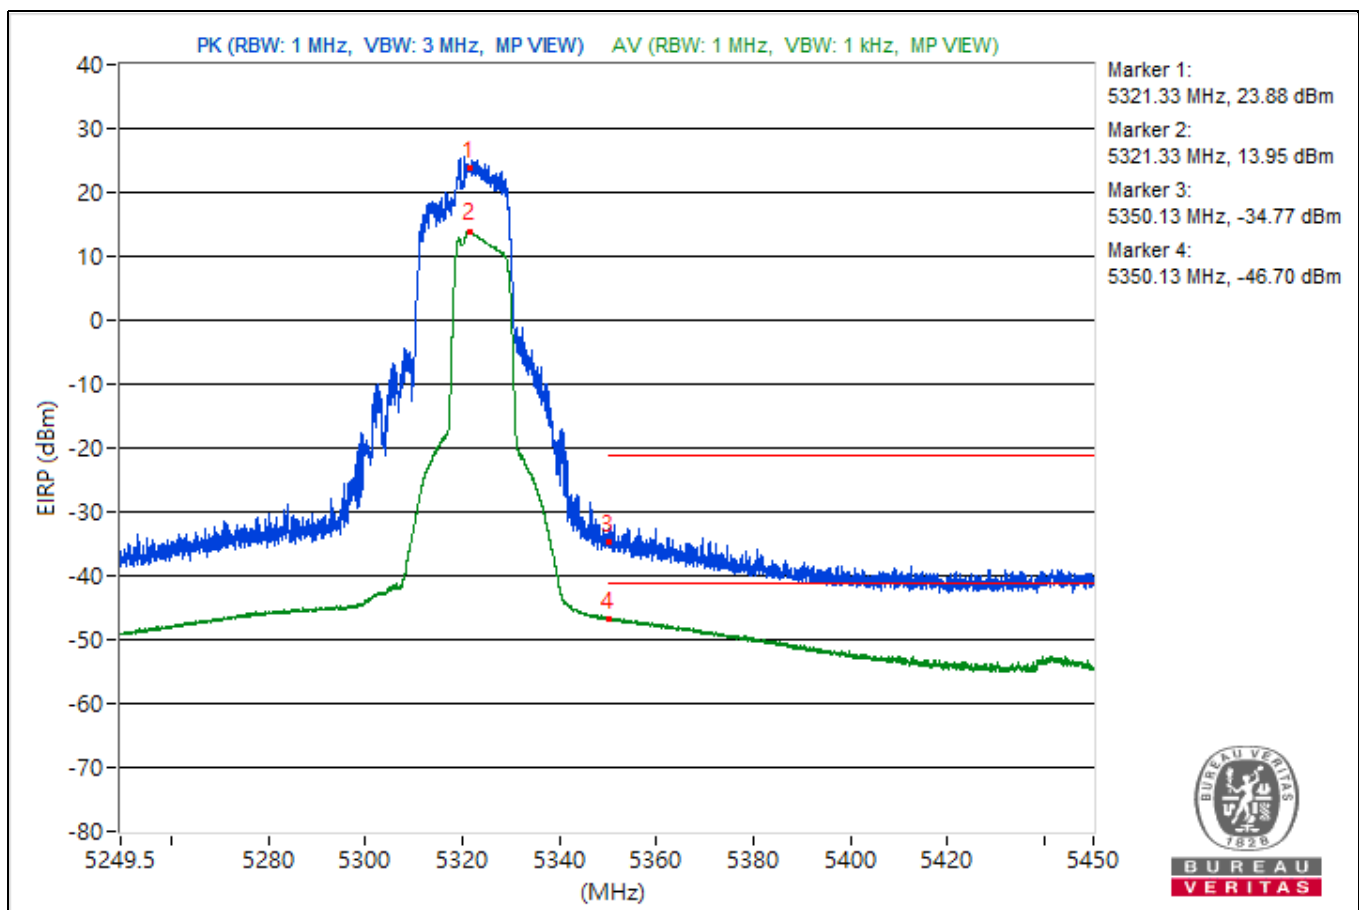


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5498.15	120.13 PK			19.95	4.92	24.87
2	*5498.57	109.19 AV			9.01	4.92	13.93
3	5459.49	63.09 PK	74	-10.91	-37.09	4.92	-32.17
4	5459.99	48.54 AV	54	-5.46	-51.64	4.92	-46.72
5	#5464.41	63.98 PK	68.26	-4.28	-36.2	4.92	-31.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

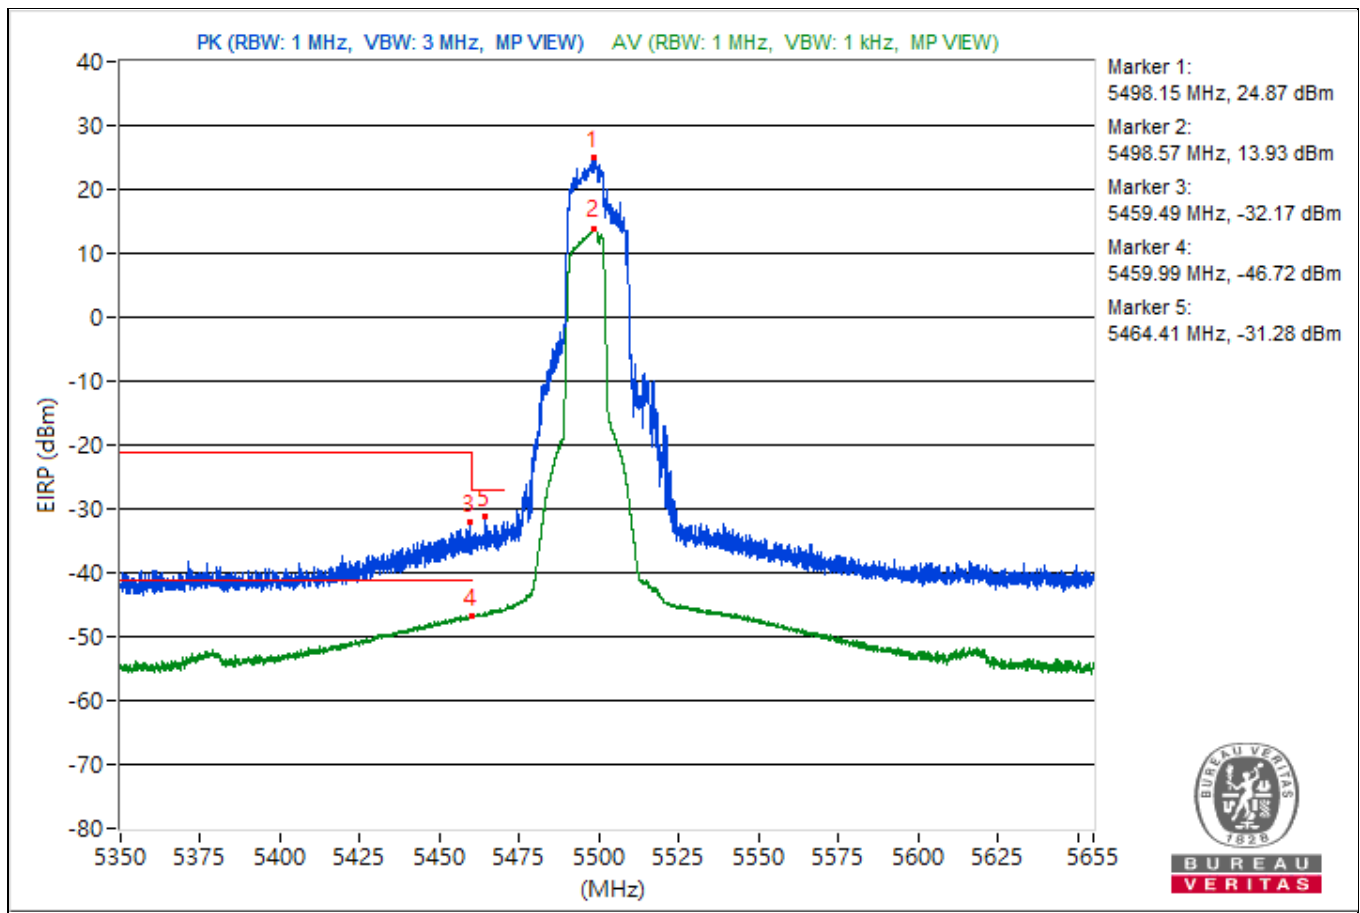


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5700.91	121.69			21.51	4.92	26.43
2	#5726.45	67.04	68.26	-1.22	-33.14	4.92	-28.22

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

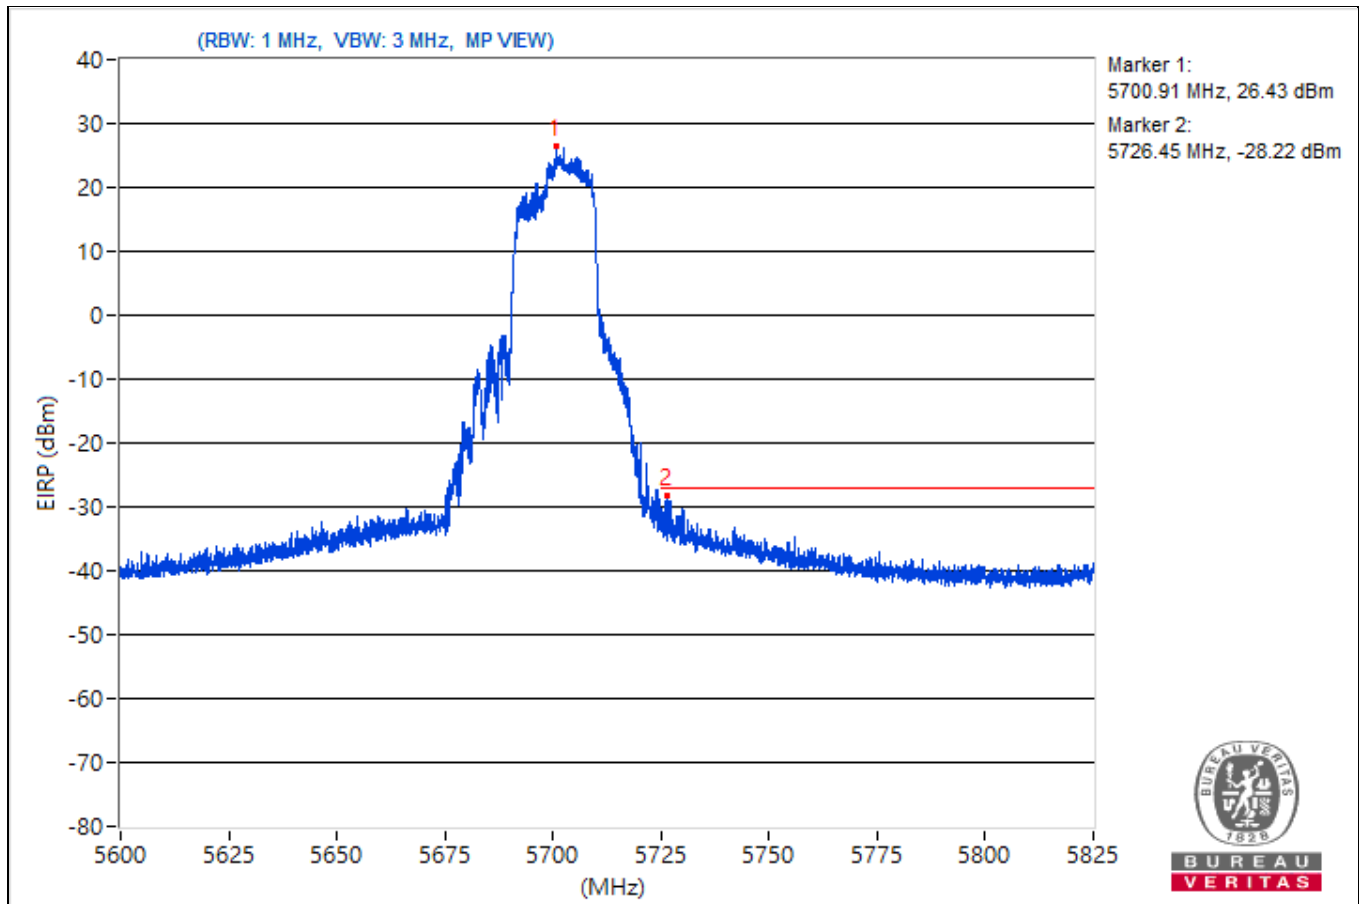


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.15	120.72			20.54	4.92	25.46
2	#5966.72	56.95	68.26	-11.31	-43.23	4.92	-38.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

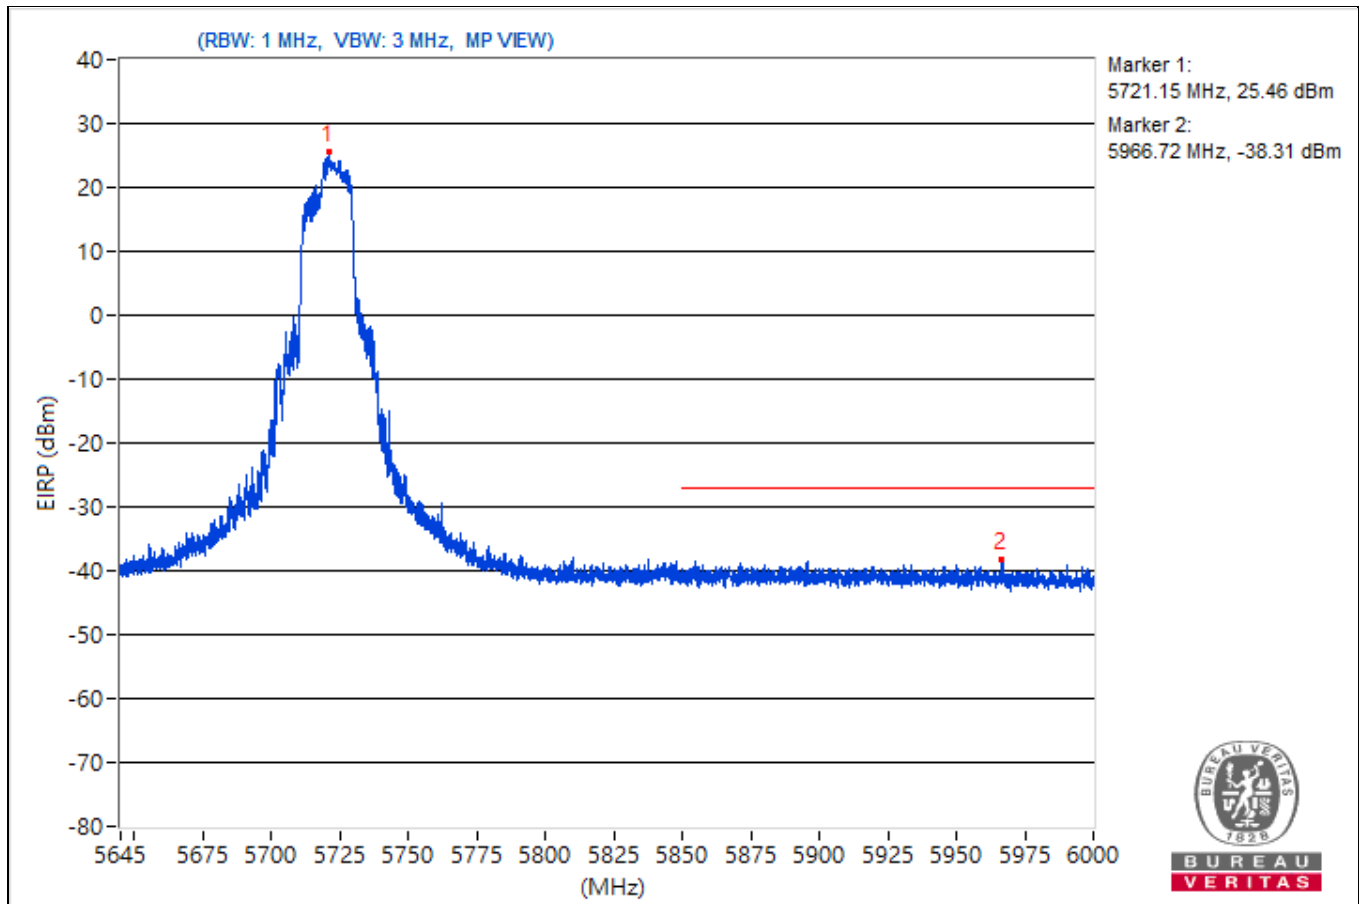


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5742.02	121.72			21.54	4.92	26.46
2	#5617.57	57.36	68.26	-10.9	-42.82	4.92	-37.9
3	#5652.01	57.59	69.74	-12.15	-42.59	4.92	-37.67
4	#5719.22	76.37	110.64	-34.27	-23.81	4.92	-18.89
5	#5721.12	78.57	113.41	-34.84	-21.61	4.92	-16.69
6	#5854.83	54.58	111.24	-56.66	-45.6	4.92	-40.68
7	#5873.59	55.55	105.65	-50.1	-44.63	4.92	-39.71
8	#5924.06	56.23	68.95	-12.72	-43.95	4.92	-39.03
9	#5975.6	56.37	68.26	-11.89	-43.81	4.92	-38.89

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

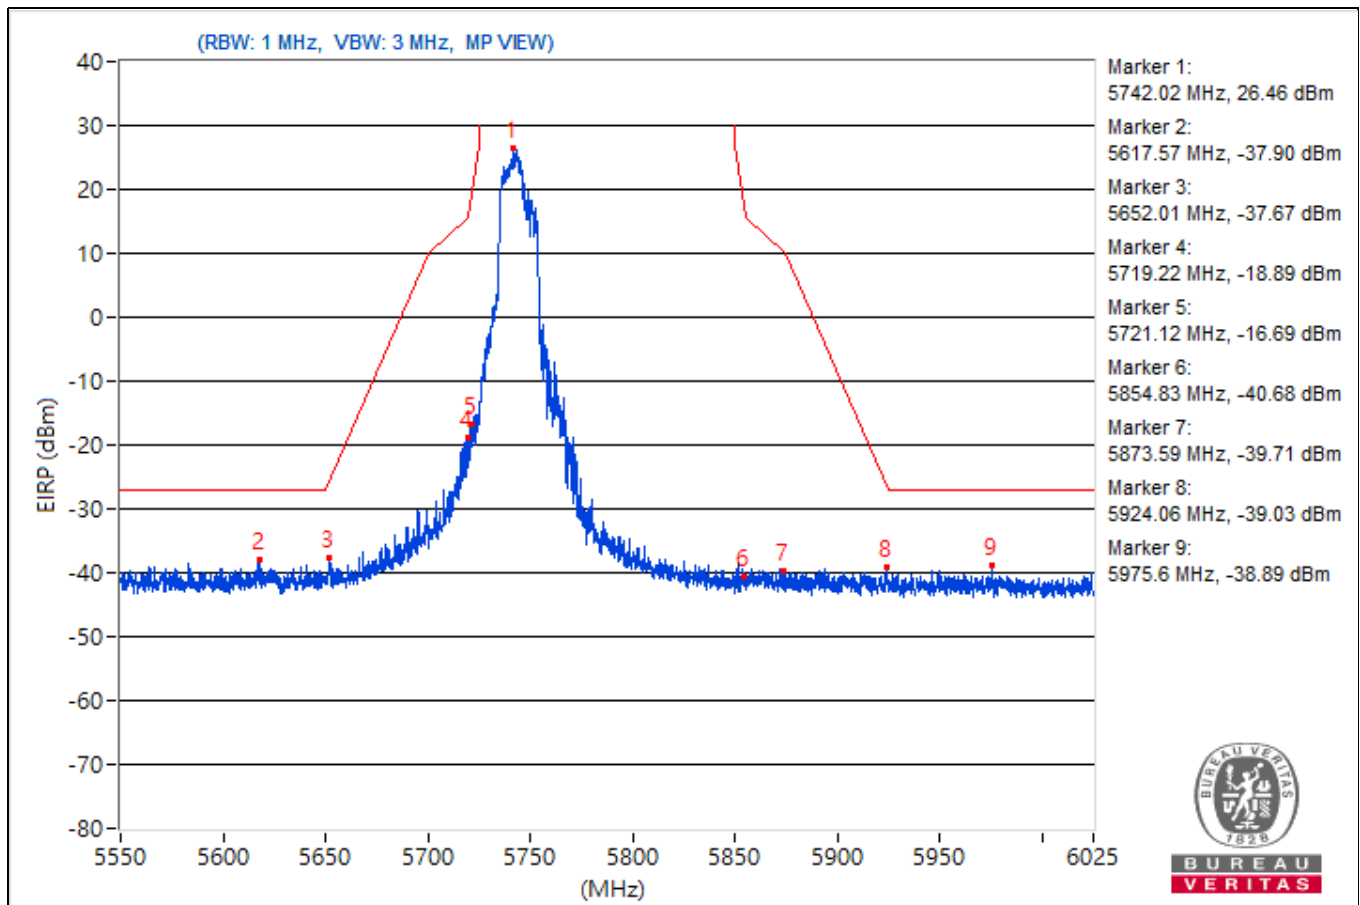


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5826.93	121.49			21.31	4.92	26.23
2	#5594.41	56.33	68.26	-11.93	-43.85	4.92	-38.93
3	#5650.11	56.37	68.34	-11.97	-43.81	4.92	-38.89
4	#5700.69	54.94	105.45	-50.51	-45.24	4.92	-40.32
5	#5720.05	55.16	110.97	-55.81	-45.02	4.92	-40.1
6	#5853.64	74.08	113.95	-39.87	-26.1	4.92	-21.18
7	#5855.78	72.35	110.64	-38.29	-27.83	4.92	-22.91
8	#5924.18	55.6	68.87	-13.27	-44.58	4.92	-39.66
9	#5952.09	57.65	68.26	-10.61	-42.53	4.92	-37.61

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

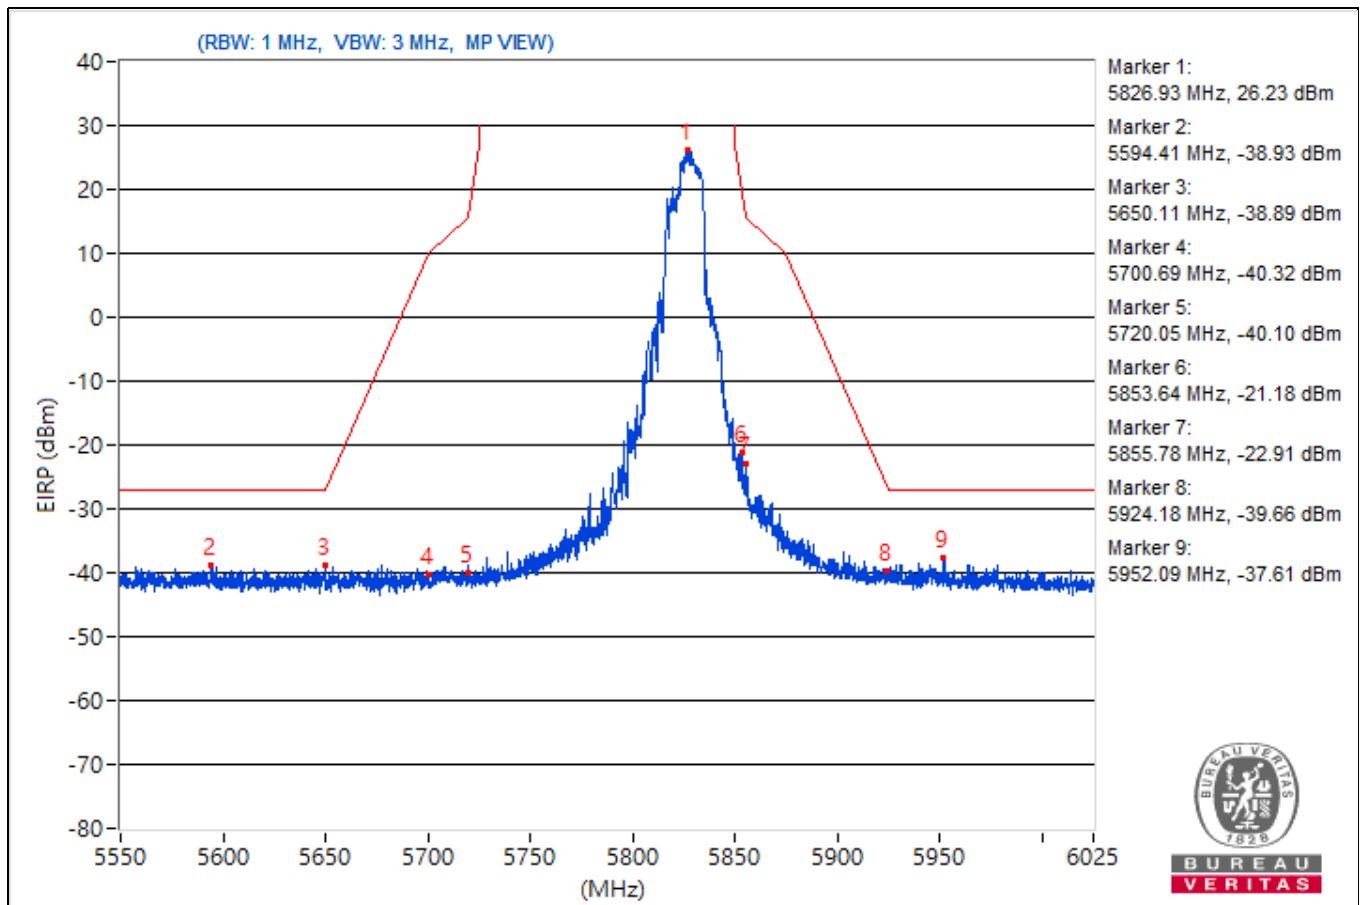


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5207.24	111.94 PK			11.76	4.92	16.68
2	*5207.24	101.94 AV			1.76	4.92	6.68
3	5135.26	64.89 PK	74	-9.11	-35.29	4.92	-30.37
4	5135.26	53.79 AV	54	-0.21	-46.39	4.92	-41.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

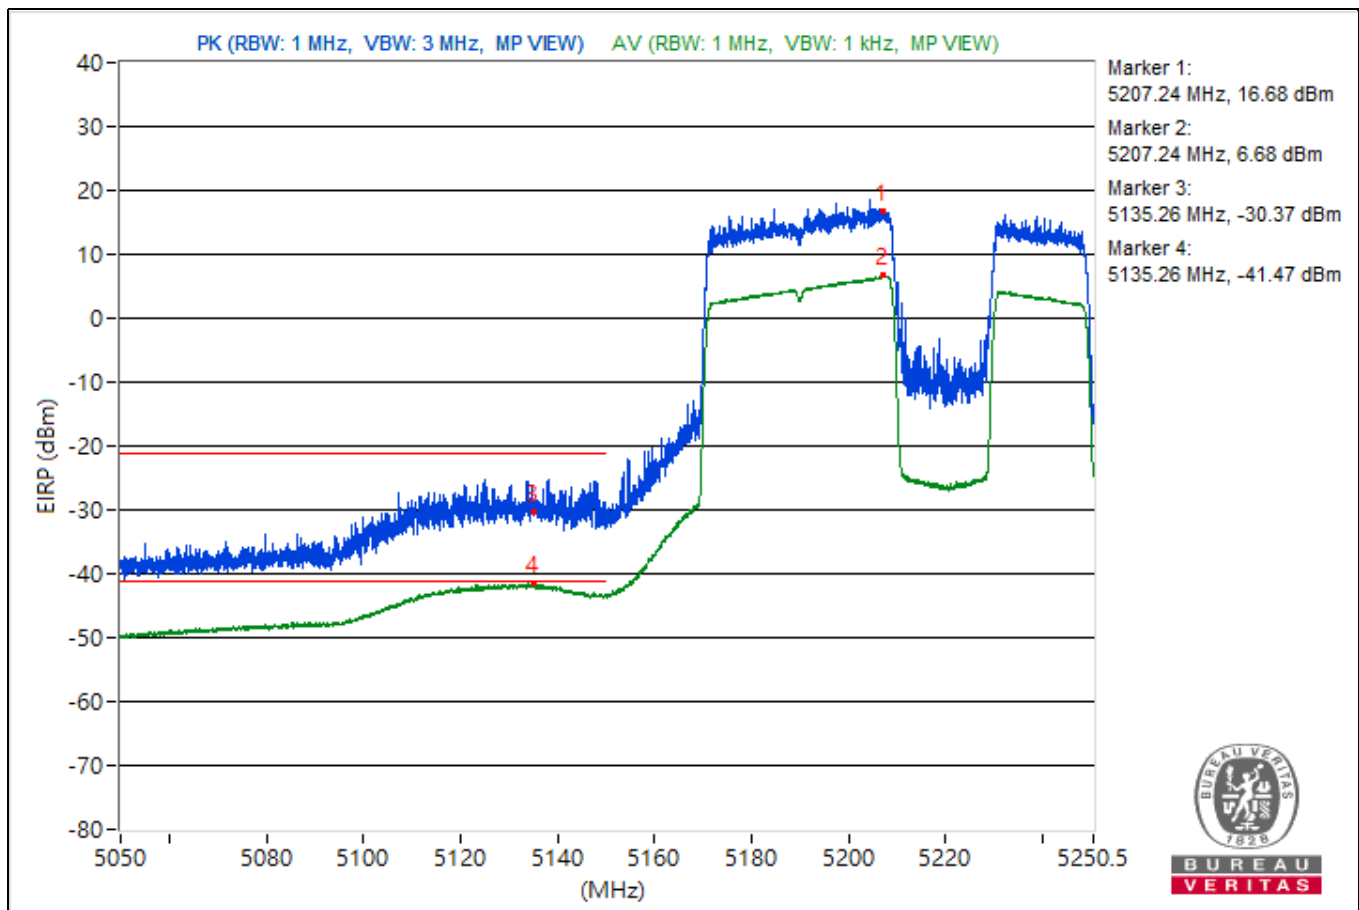


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5292.41	110.37 PK			10.19	4.92	15.11
2	*5292.41	100.34 AV			0.16	4.92	5.08
3	5365.64	66.15 PK	74	-7.85	-34.03	4.92	-29.11
4	5365.64	53.83 AV	54	-0.17	-46.35	4.92	-41.43

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

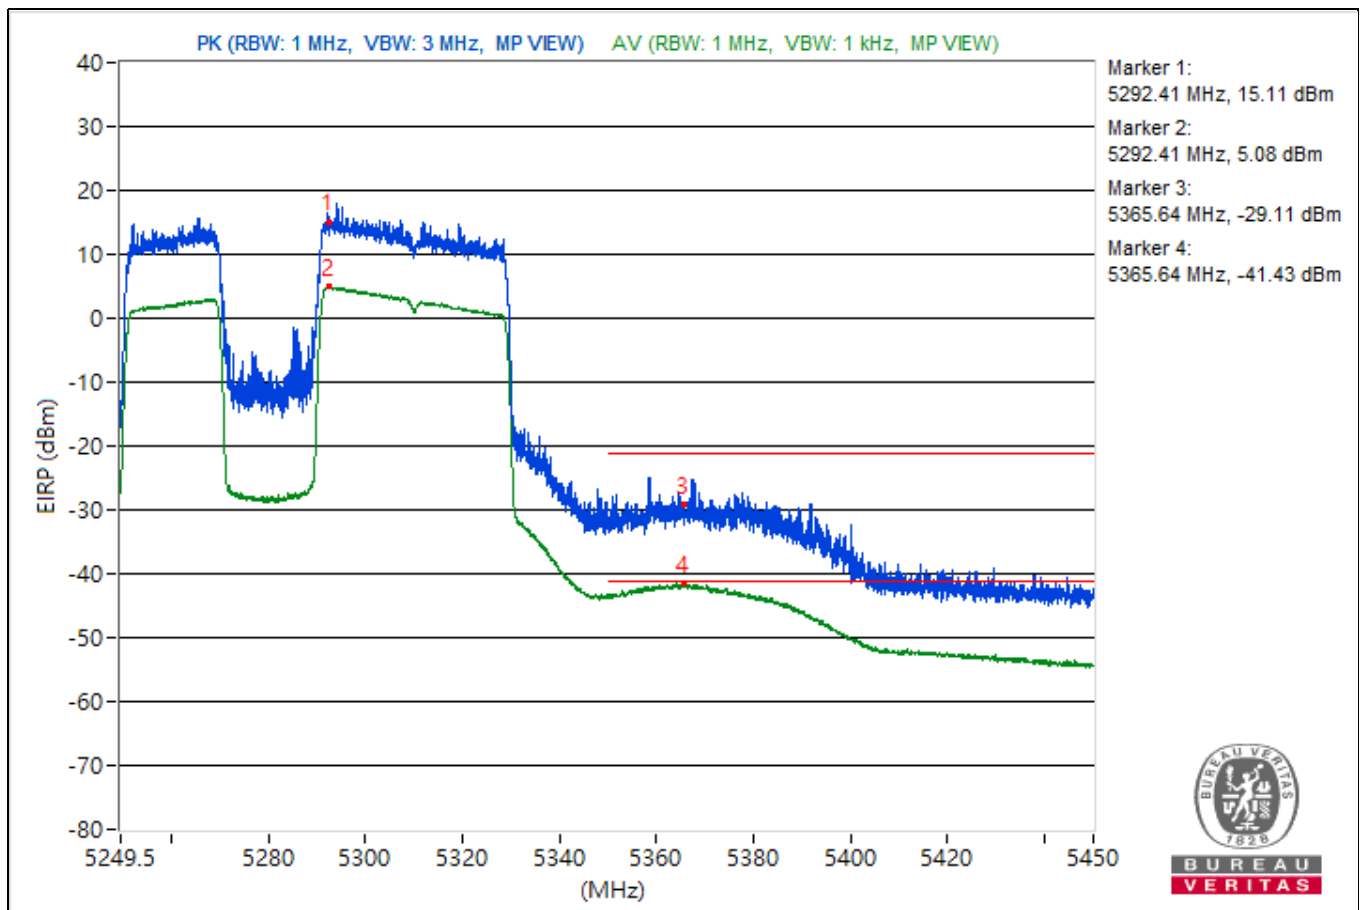


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5526.9	111.89 PK			11.71	4.92	16.63
2	*5527.43	100.67 AV			0.49	4.92	5.41
3	5434.45	68.45 PK	74	-5.55	-31.73	4.92	-26.81
4	5453.81	53.96 AV	54	-0.04	-46.22	4.92	-41.3
5	#5469.45	67.55 PK	68.26	-0.71	-32.63	4.92	-27.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

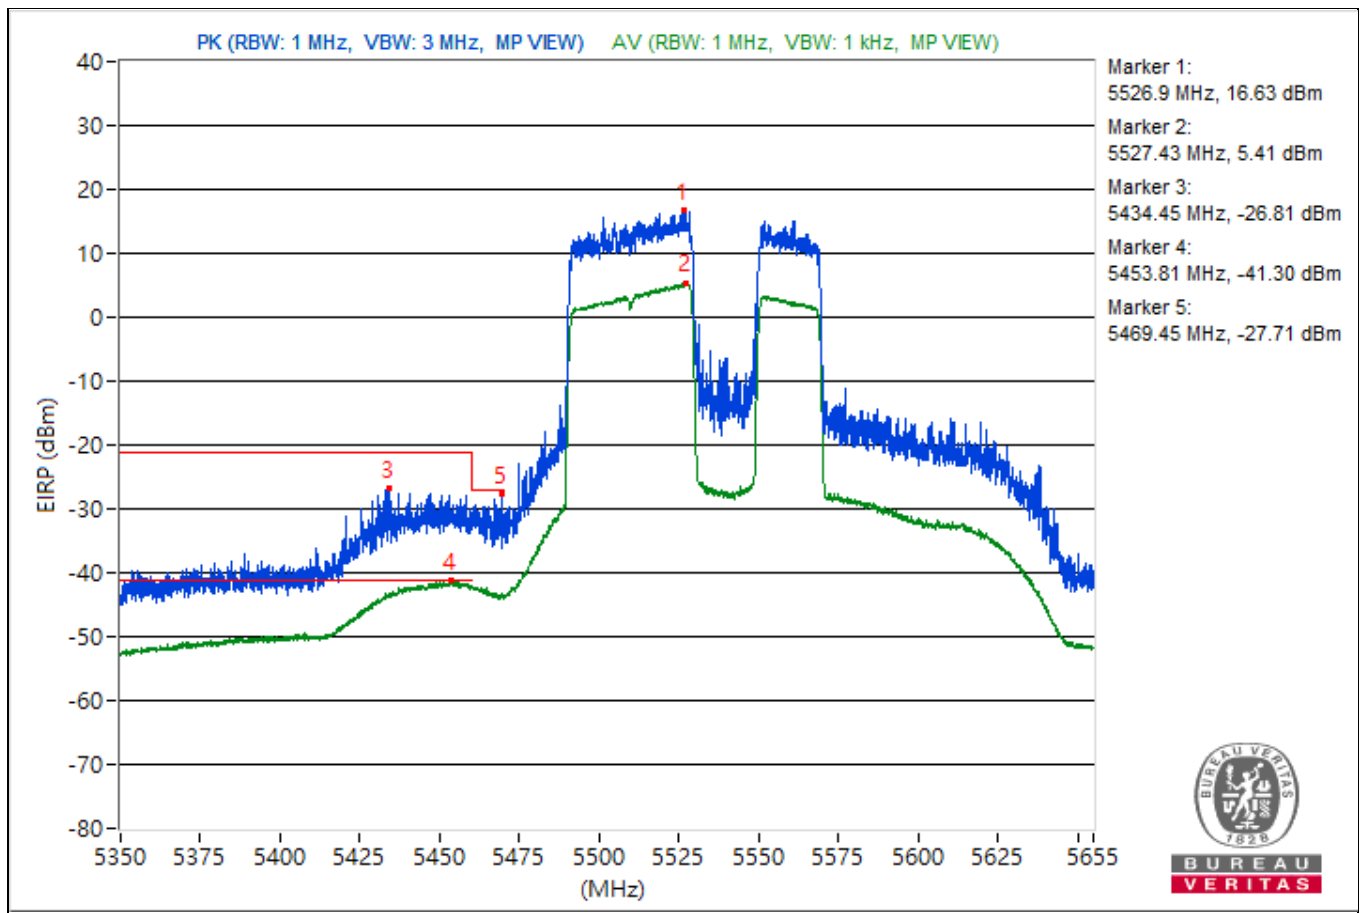


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5614.74	115.55 PK			15.37	4.92	20.29
2	*5612.11	103.53 AV			3.35	4.92	8.27
3	5452.06	65.96 PK	74	-8.04	-34.22	4.92	-29.3
4	5459.65	52 AV	54	-2	-48.18	4.92	-43.26
5	#5468.91	67.94 PK	68.26	-0.32	-32.24	4.92	-27.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

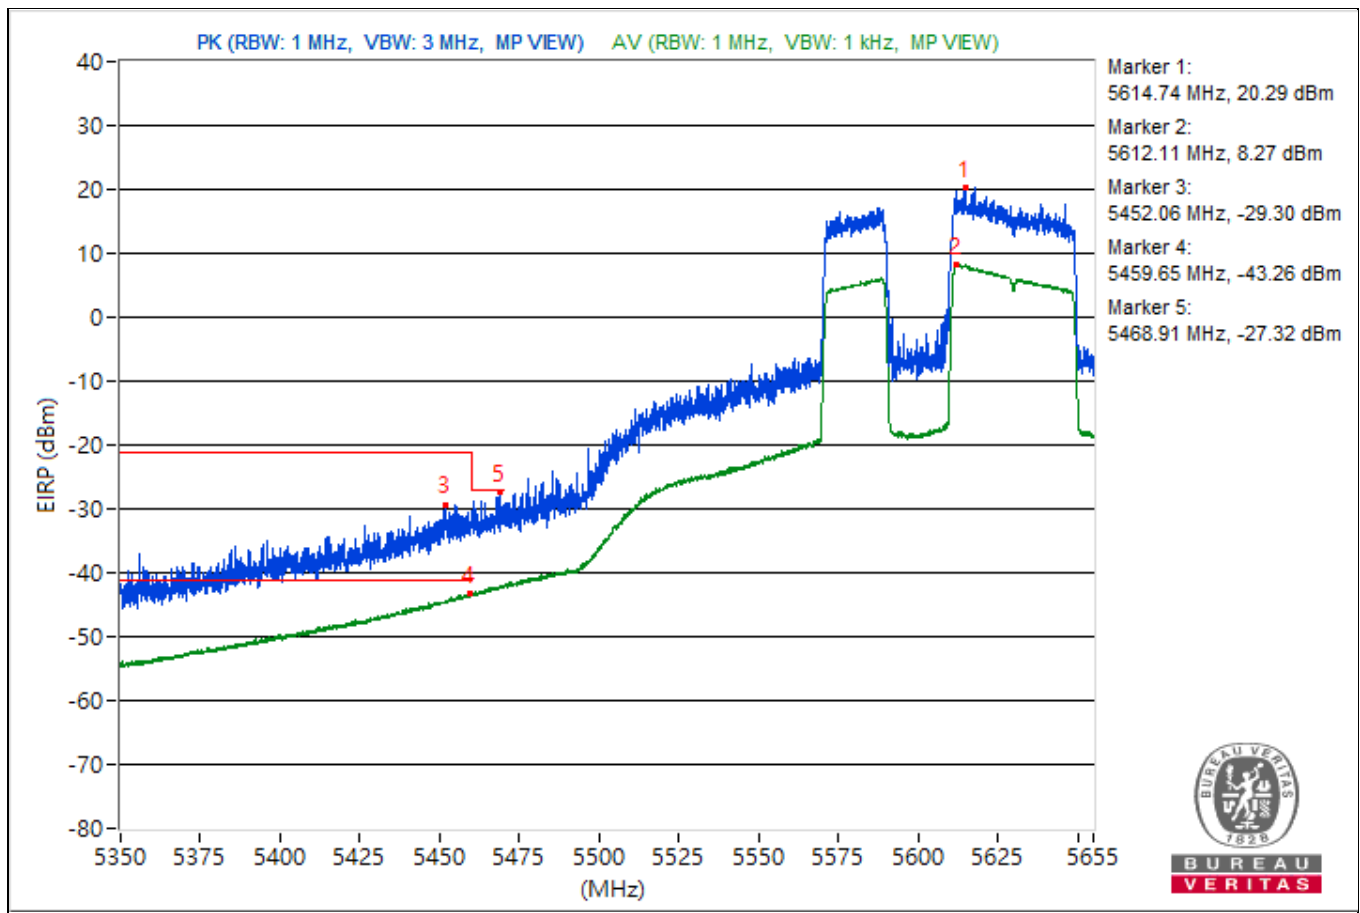


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5696.16	115.19			15.01	4.92	19.93
2	#5851.52	66.84	68.26	-1.42	-33.34	4.92	-28.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

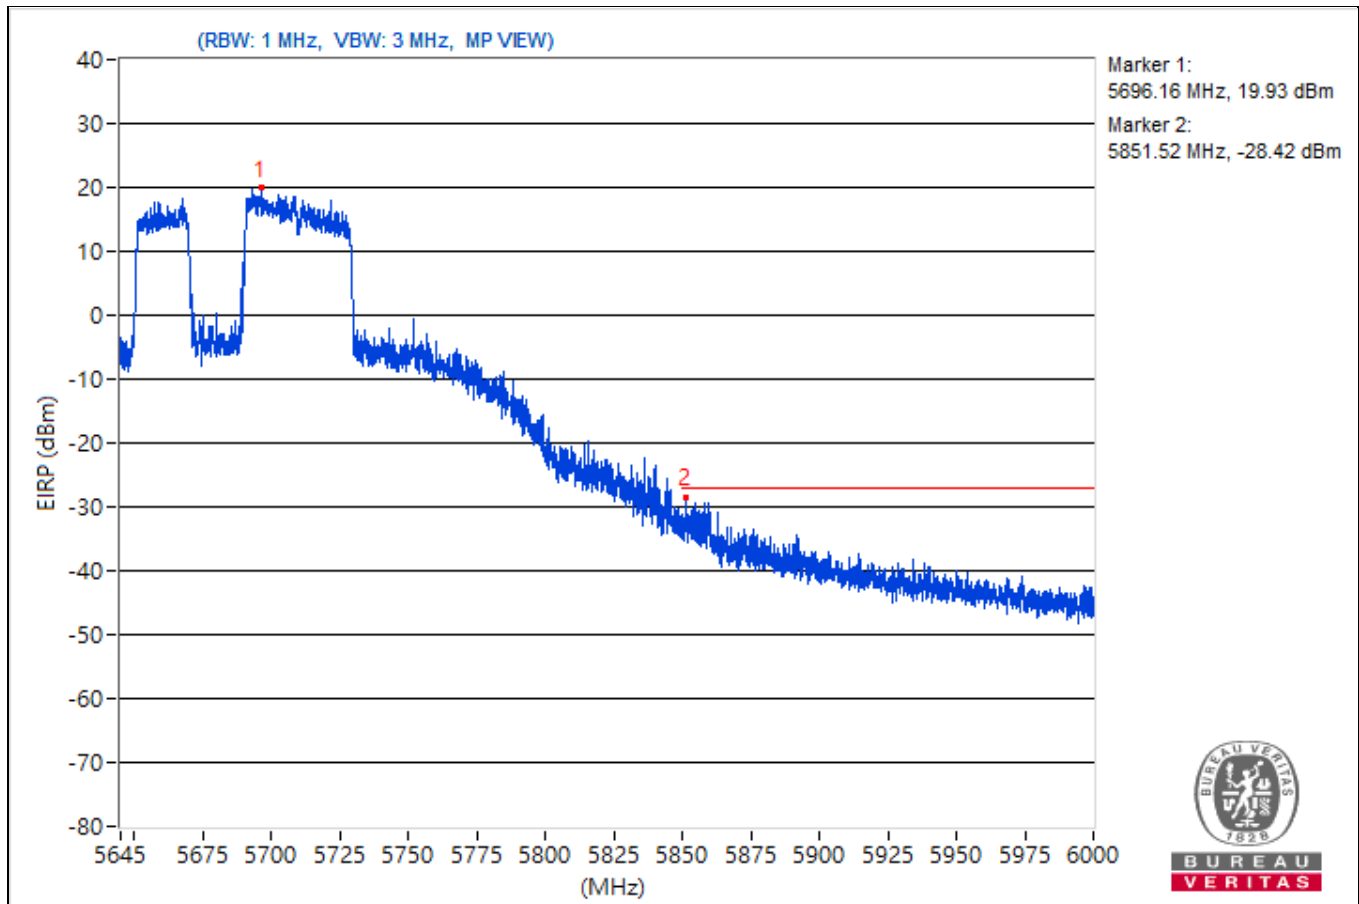


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	26°C, 62% RH
Tested By	Dolly Chung		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5770.4	112.39			12.21	4.92	17.13
2	#5646.9	66.88	68.26	-1.38	-33.3	4.92	-28.38
3	#5650.58	68.61	68.69	-0.08	-31.57	4.92	-26.65
4	#5708.89	86.45	107.75	-21.3	-13.73	4.92	-8.81
5	#5720.05	82.11	110.97	-28.86	-18.07	4.92	-13.15
6	#5854.71	81.71	111.52	-29.81	-18.47	4.92	-13.55
7	#5865.64	82.99	107.88	-24.89	-17.19	4.92	-12.27
8	#5920.14	64.7	71.85	-7.15	-35.48	4.92	-30.56
9	#5931.31	66.75	68.26	-1.51	-33.43	4.92	-28.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

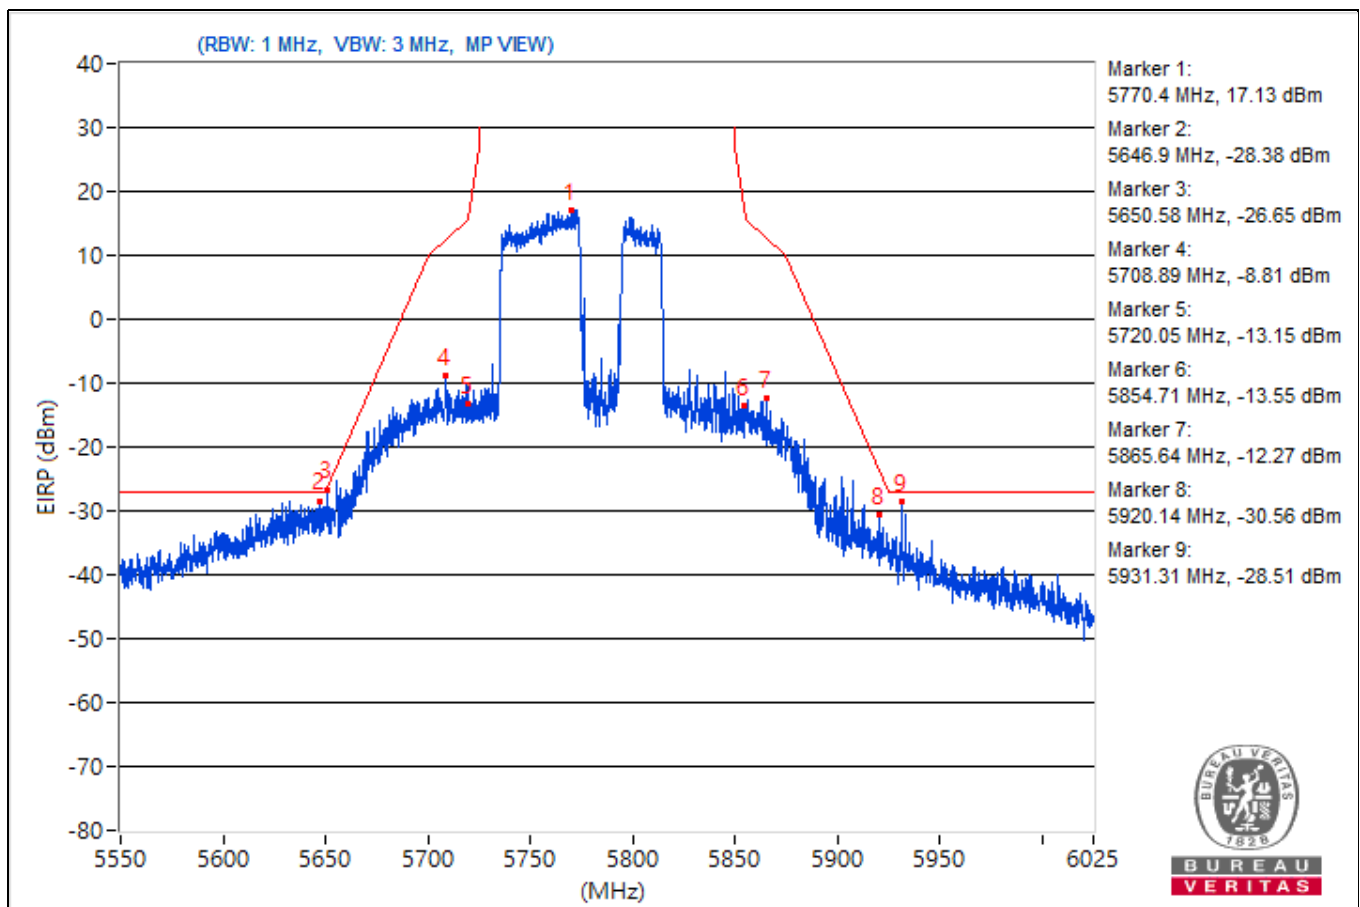


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5246.87	105.28 PK			5.1	4.92	10.02
2	*5246.87	97.07 AV			-3.11	4.92	1.81
3	5139.7	57.12 PK	74	-16.88	-43.06	4.92	-38.14
4	5139.7	48.08 AV	54	-5.92	-52.1	4.92	-47.18

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

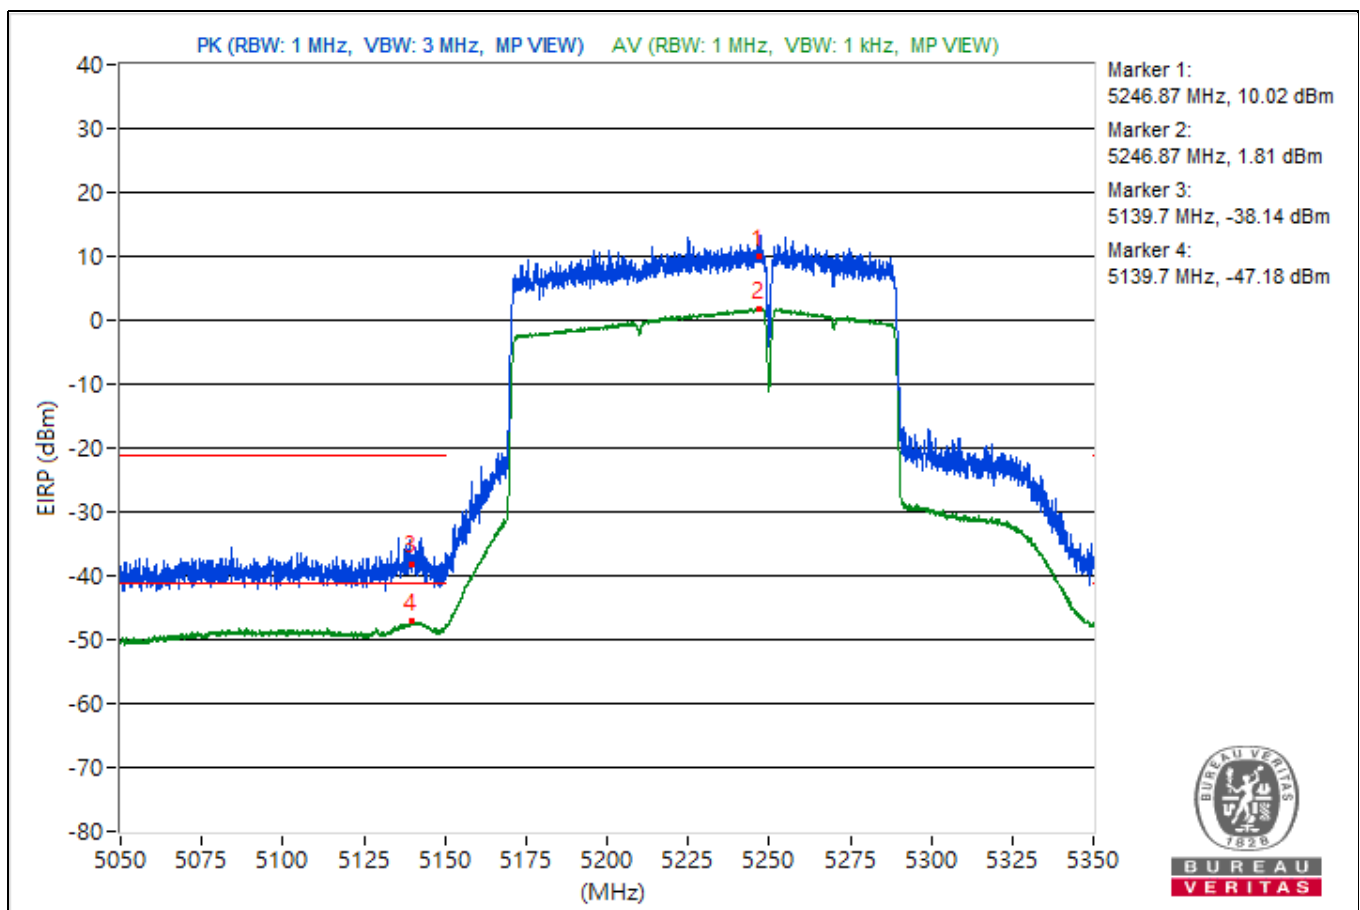


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5247.65	105.12 PK			4.94	4.92	9.86
2	*5247.65	97.09 AV			-3.09	4.92	1.83
3	5350.14	56.39 PK	74	-17.61	-43.79	4.92	-38.87
4	5350.14	47.74 AV	54	-6.26	-52.44	4.92	-47.52

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

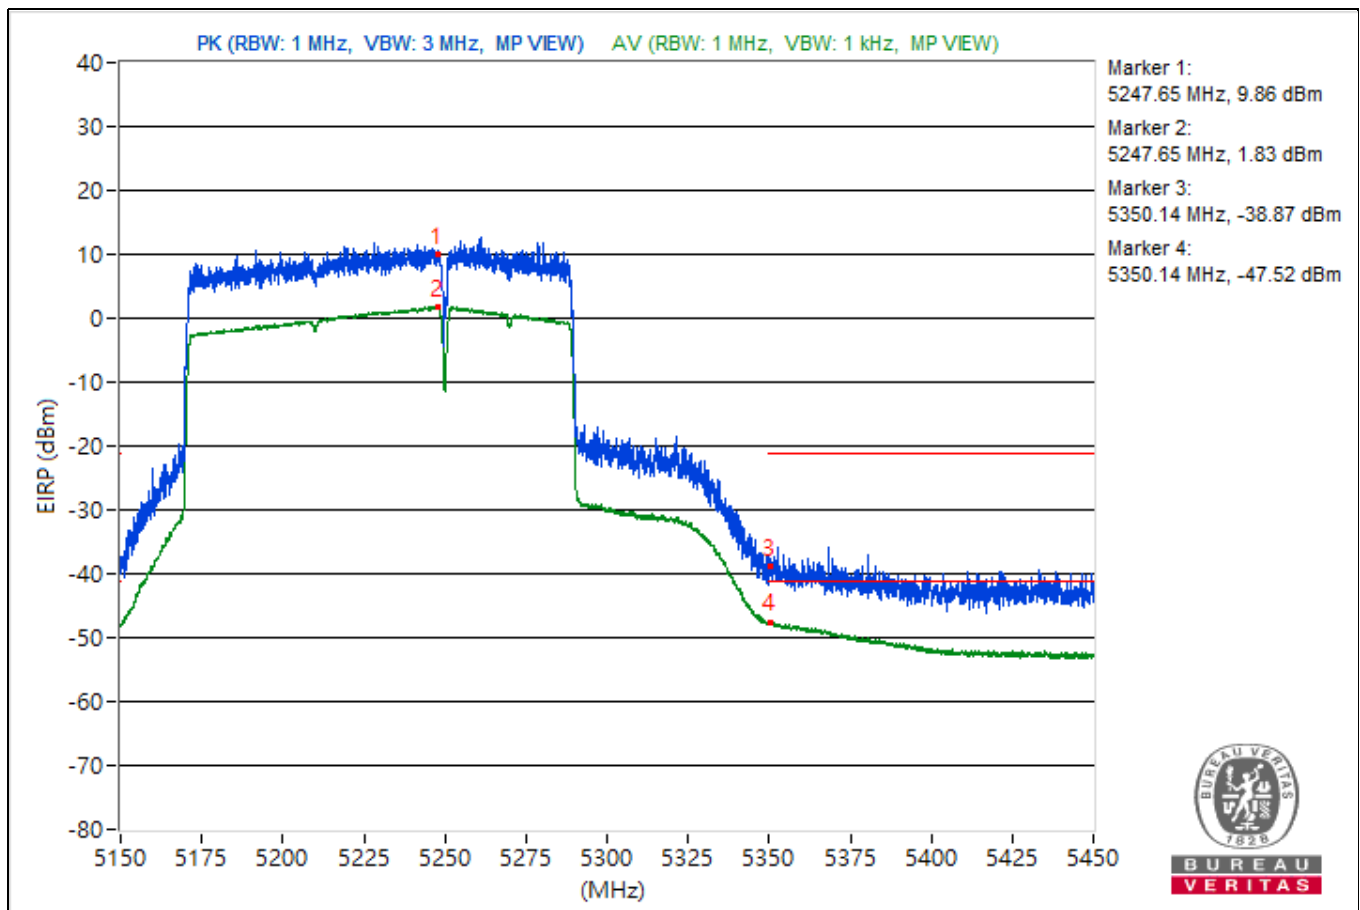


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.7 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5562.39	110.47 PK			10.29	4.92	15.21
2	*5567.16	97.5 AV			-2.68	4.92	2.24
3	5431.09	69.51 PK	74	-4.49	-30.67	4.92	-25.75
4	5429.91	53.62 AV	54	-0.38	-46.56	4.92	-41.64
5	#5466.47	66.01 PK	68.26	-2.25	-34.17	4.92	-29.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band, the limit was restricted at the Conducted Out of Band Emissions.

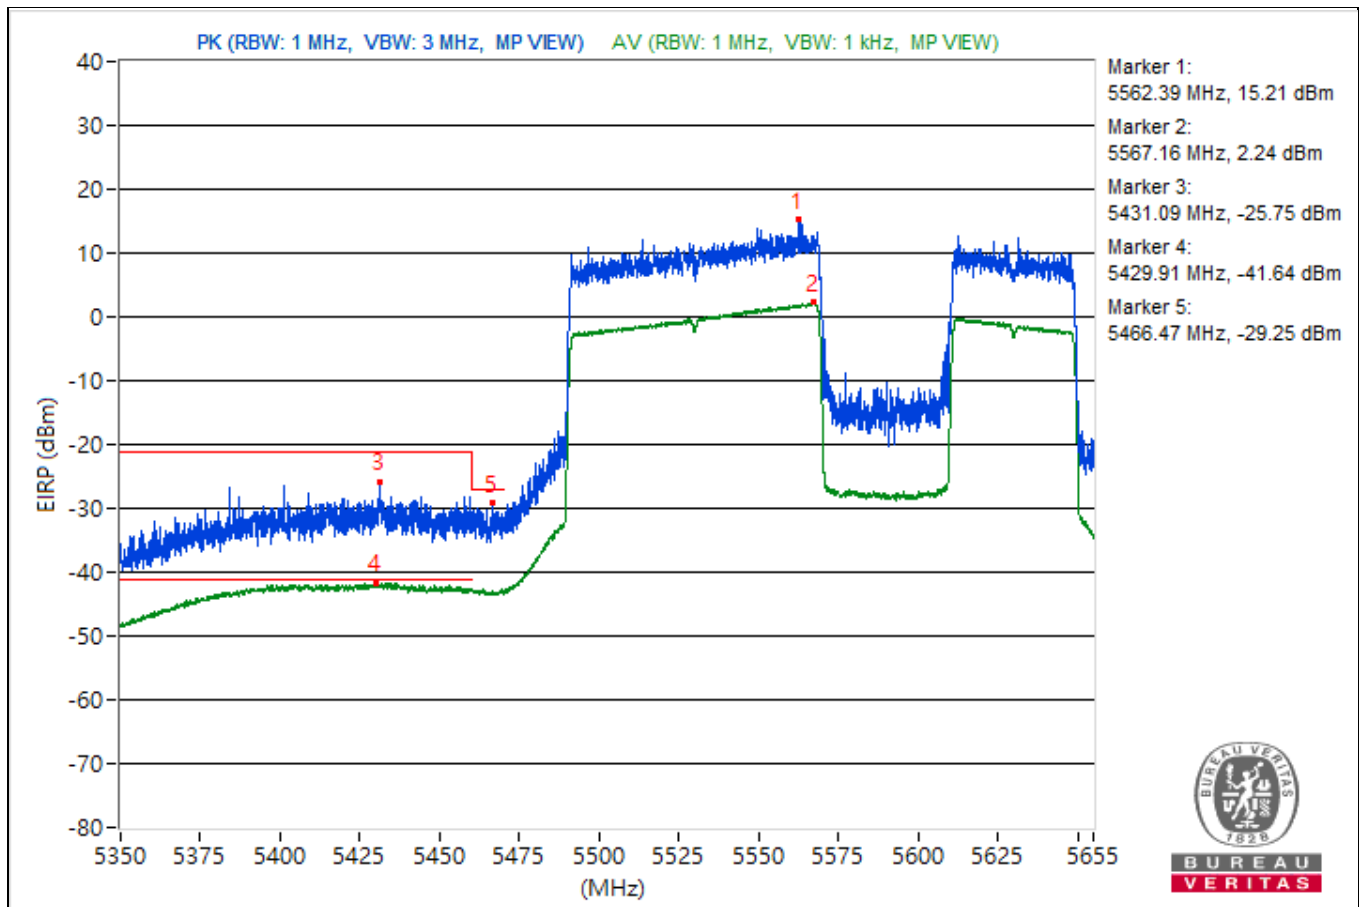


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	23°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5247.66	102.71 PK			2.53	4.92	7.45
2	*5247.66	95.82 AV			-4.36	4.92	0.56
3	5149.6	62.66 PK	74	-11.34	-37.52	4.92	-32.6
4	5149.6	53.51 AV	54	-0.49	-46.67	4.92	-41.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

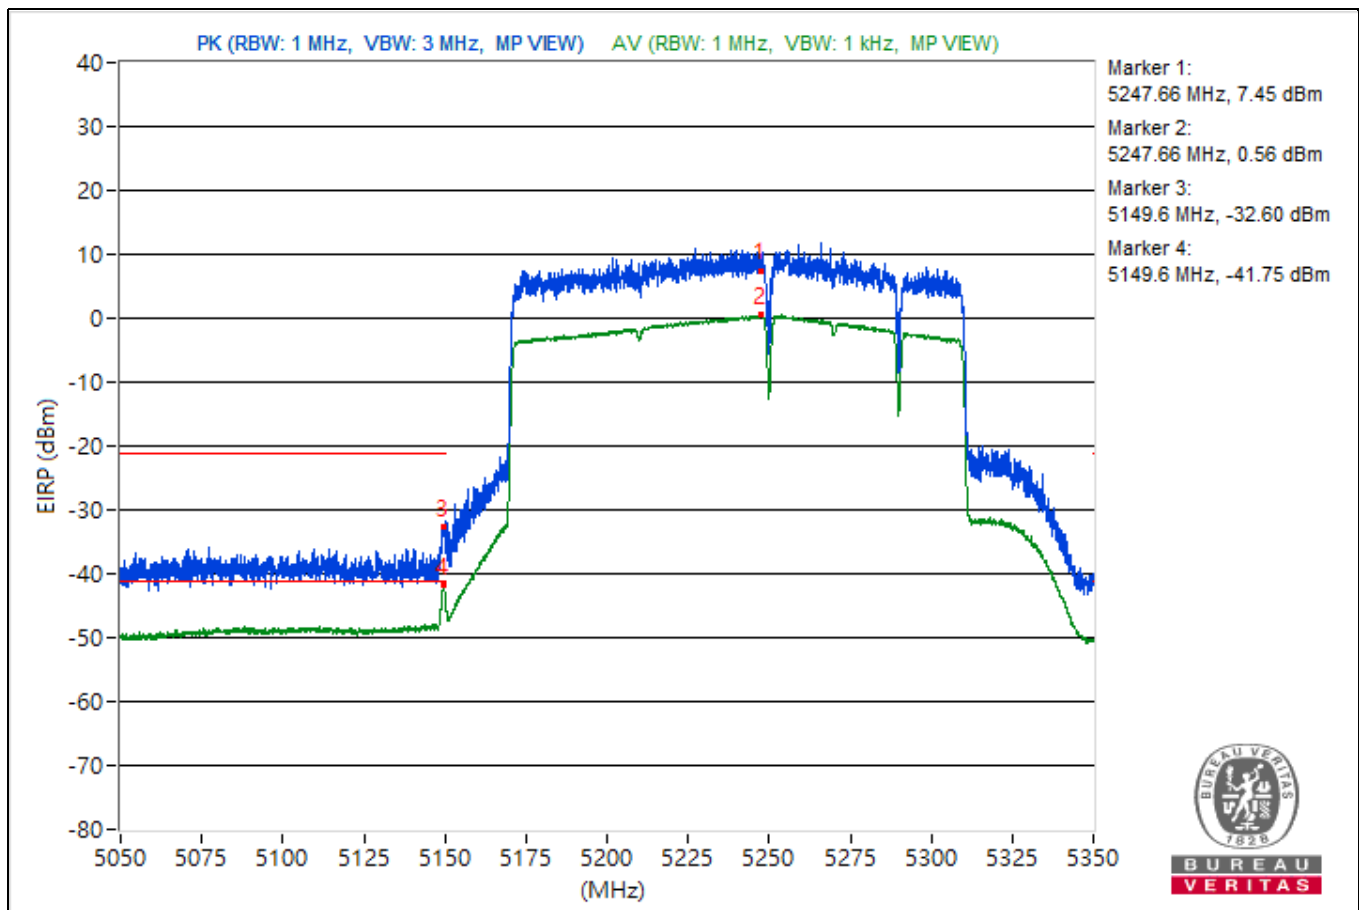


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5247.73	104.09 PK			3.91	4.92	8.83
2	*5247.73	95.76 AV			-4.42	4.92	0.5
3	5353.7	54.91 PK	74	-19.09	-45.27	4.92	-40.35
4	5353.7	45.25 AV	54	-8.75	-54.93	4.92	-50.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

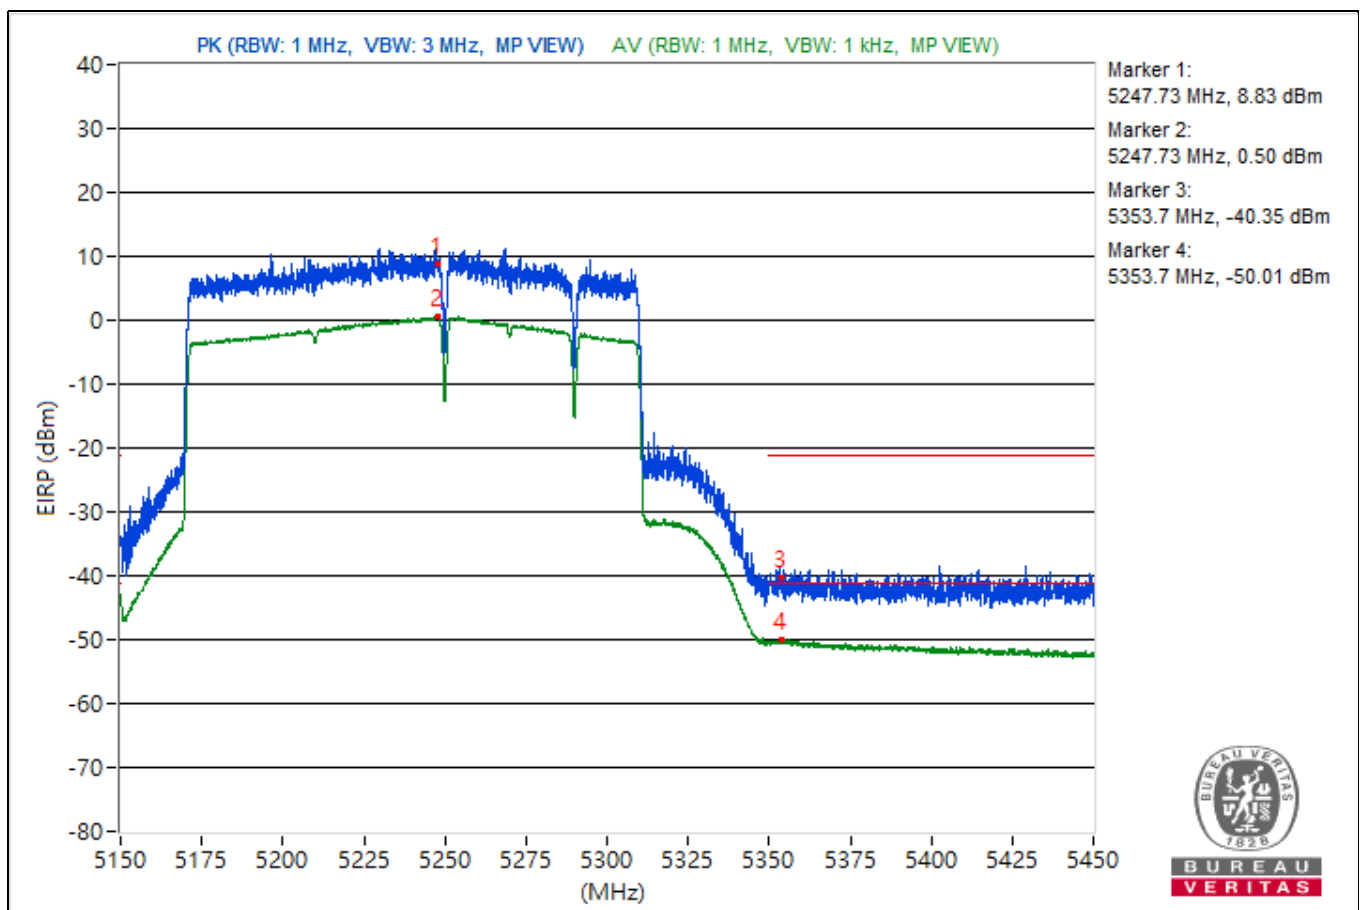


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.7 GHz	Environmental Conditions	23°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5555.15	107.61 PK			7.43	4.92	12.35
2	*5572.88	95.62 AV			-4.56	4.92	0.36
3	5428.08	67.27 PK	74	-6.73	-32.91	4.92	-27.99
4	5458.96	53.59 AV	54	-0.41	-46.59	4.92	-41.67
5	#5467.62	64.36 PK	68.26	-3.9	-35.82	4.92	-30.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band, the limit was restricted at the Conducted Out of Band Emissions.

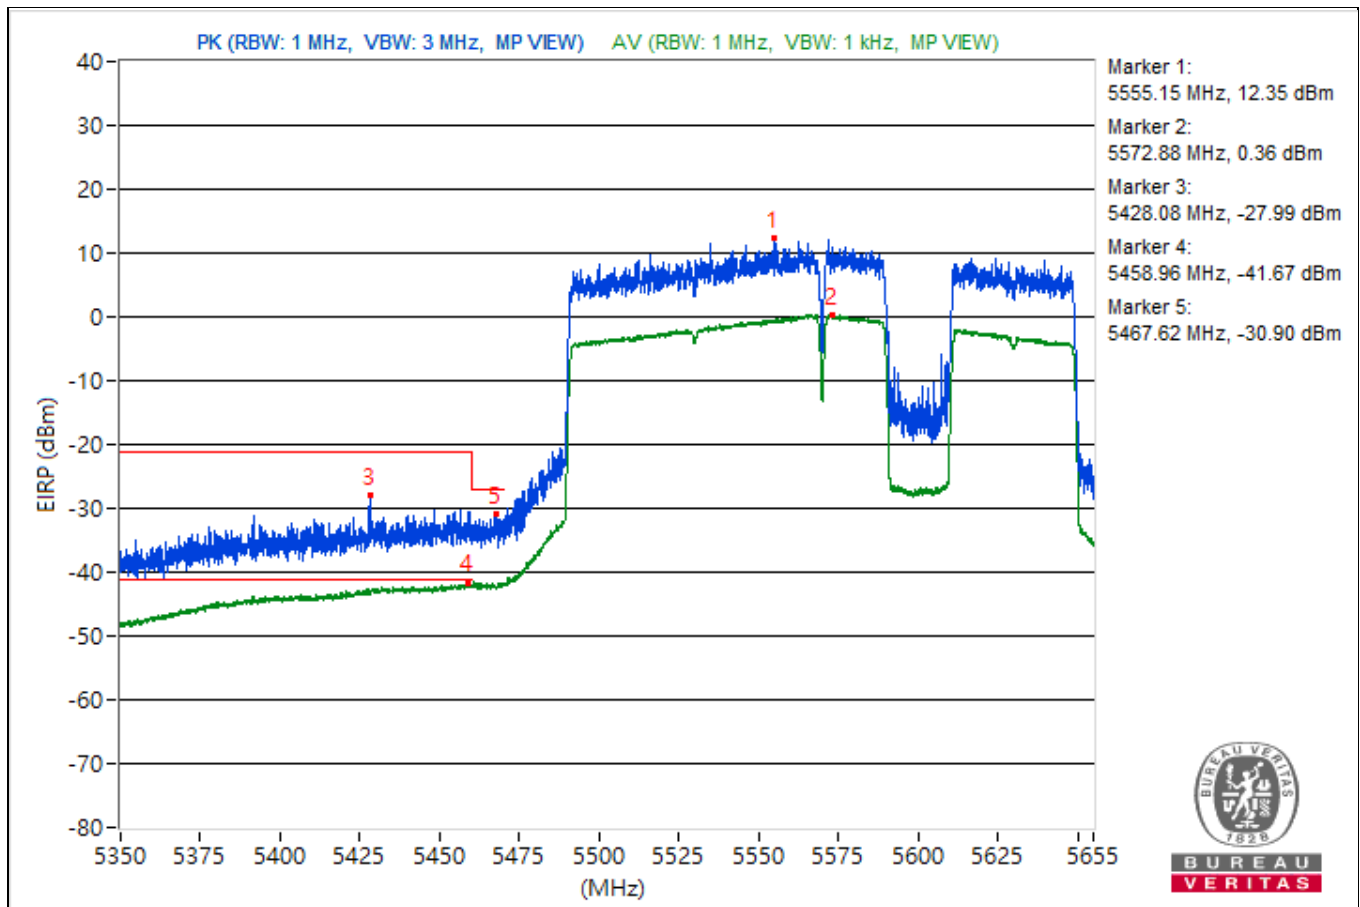


2Tx


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.89	55.37 PK	74	-18.63	-50.67	-50.98	7.93	-39.89
2	5098.89	48.69 AV	54	-5.31	-58.66	-56.6	7.93	-46.57
3	11451.64	50.64 PK	74	-23.36	-55.13	-56.04	7.93	-44.62
4	11451.64	44.46 AV	54	-9.54	-63.63	-60.42	7.93	-50.8
5	18835.3	49.47 PK	74	-24.53	-56.02	-57.58	7.93	-45.79
6	18835.3	45.84 AV	54	-8.16	-59.17	-62.01	7.93	-49.42
7	23803.9	54.75 PK	74	-19.25	-50.23	-53.15	7.93	-40.51
8	23803.9	46.61 AV	54	-7.39	-58.34	-61.37	7.93	-48.65
9	38670.93	49.73 PK	74	-24.27	-56.88	-56.11	7.93	-45.53
10	38670.93	37.45 AV	54	-16.55	-70.6	-67.46	7.93	-57.81

Note: Margin value = Emission Level - Limit value

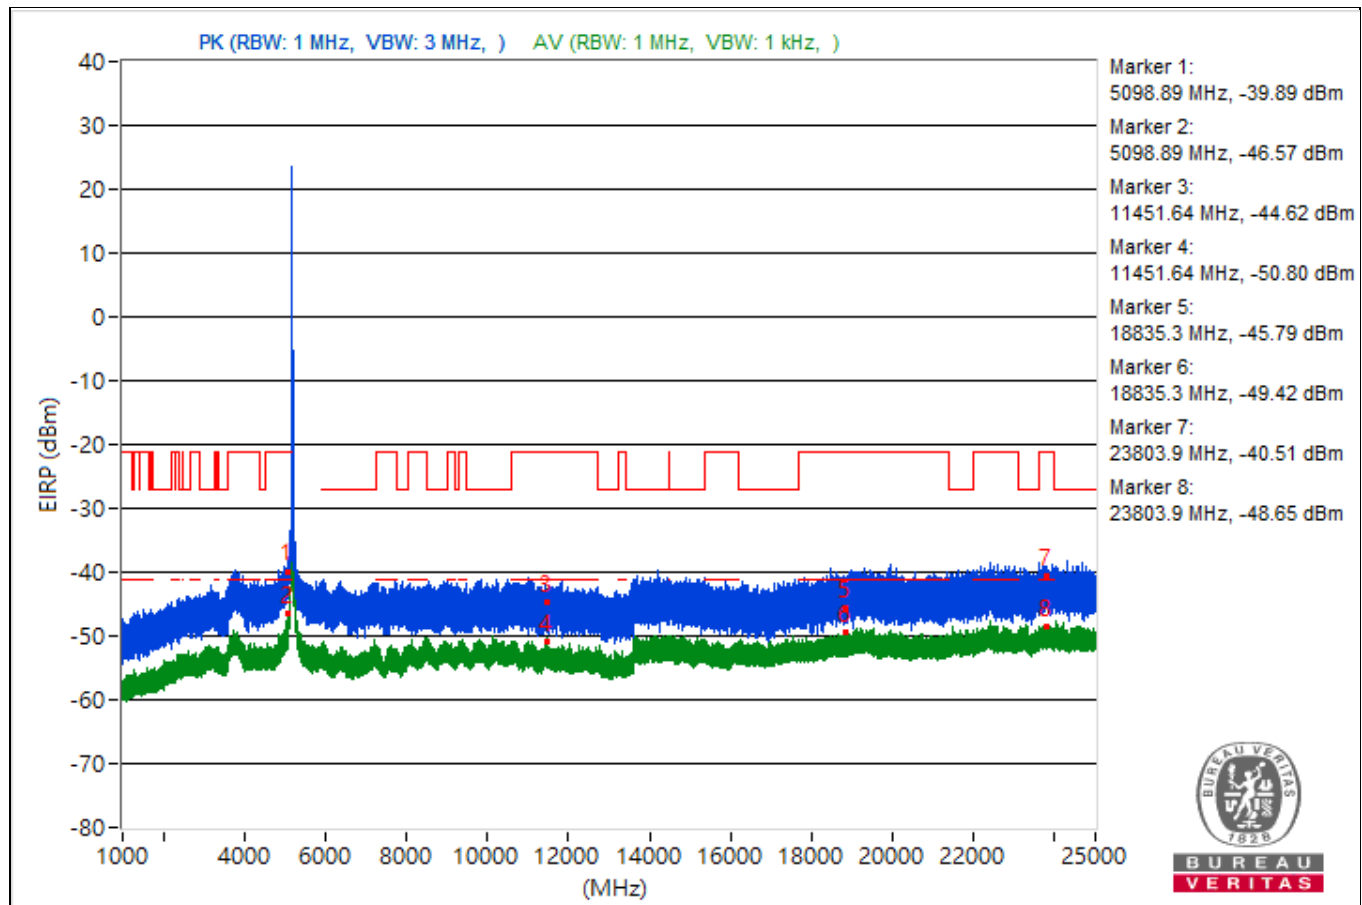


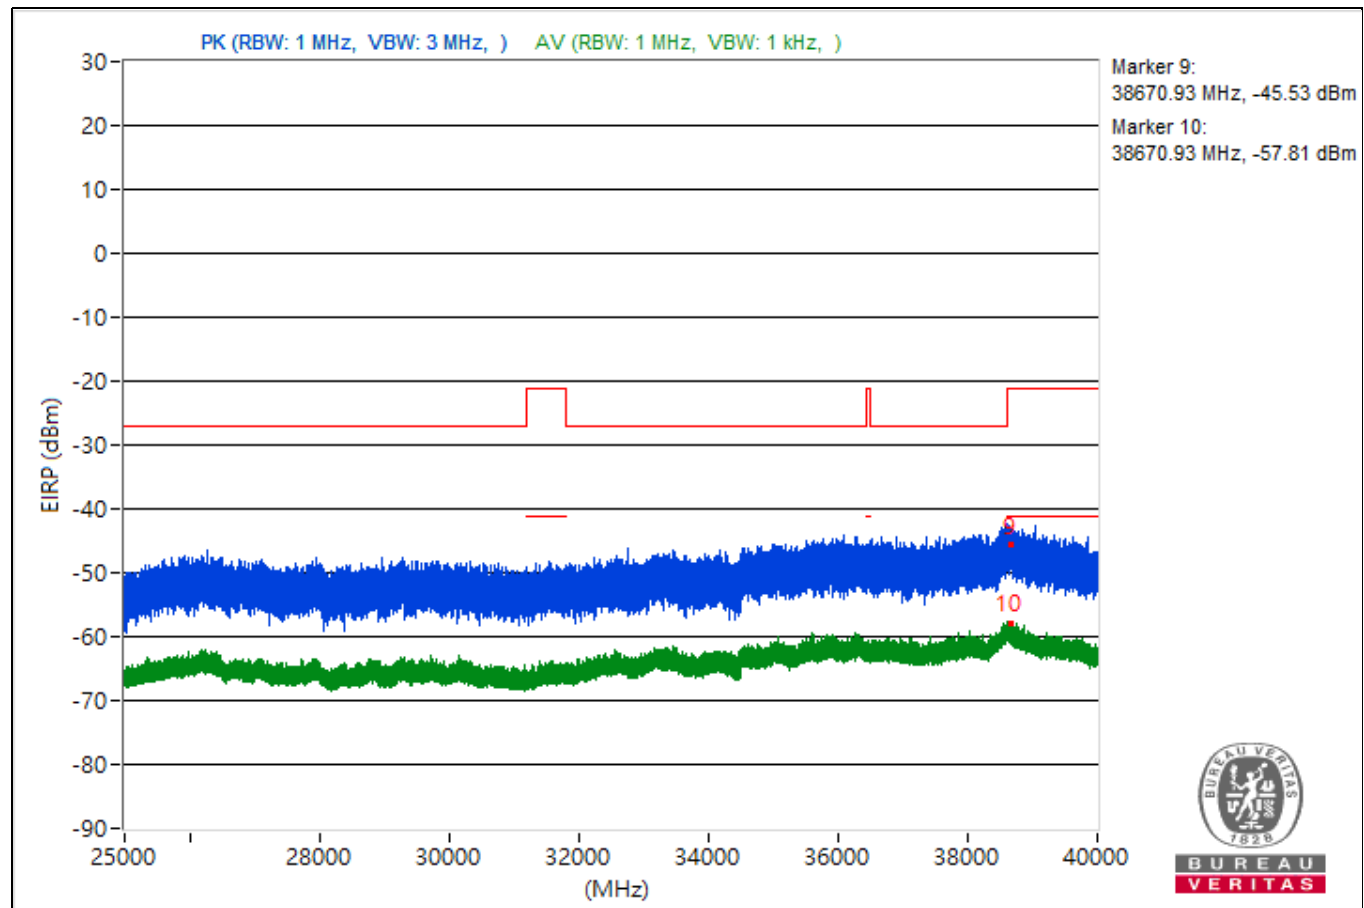


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5095.16	54.16 PK	74	-19.84	-50.98	-53.44	7.93	-41.1
2	5095.16	48.59 AV	54	-5.41	-58.28	-57.02	7.93	-46.67
3	8483.56	50.56 PK	74	-23.44	-55.87	-55.42	7.93	-44.7
4	8483.56	44.65 AV	54	-9.35	-60.02	-63.95	7.93	-50.61
5	18755.3	50.67 PK	74	-23.33	-53.82	-58.37	7.93	-44.59
6	18755.3	45.57 AV	54	-8.43	-62.21	-59.48	7.93	-49.69
7	22372.8	52.35 PK	74	-21.65	-53.18	-54.65	7.93	-42.91
8	22372.8	46.84 AV	54	-7.16	-60.84	-58.25	7.93	-48.42
9	38601.51	47.44 PK	74	-26.56	-58.53	-59	7.93	-47.82
10	38601.51	37.7 AV	54	-16.3	-66.91	-71.04	7.93	-57.56

Note: Margin value = Emission Level - Limit value

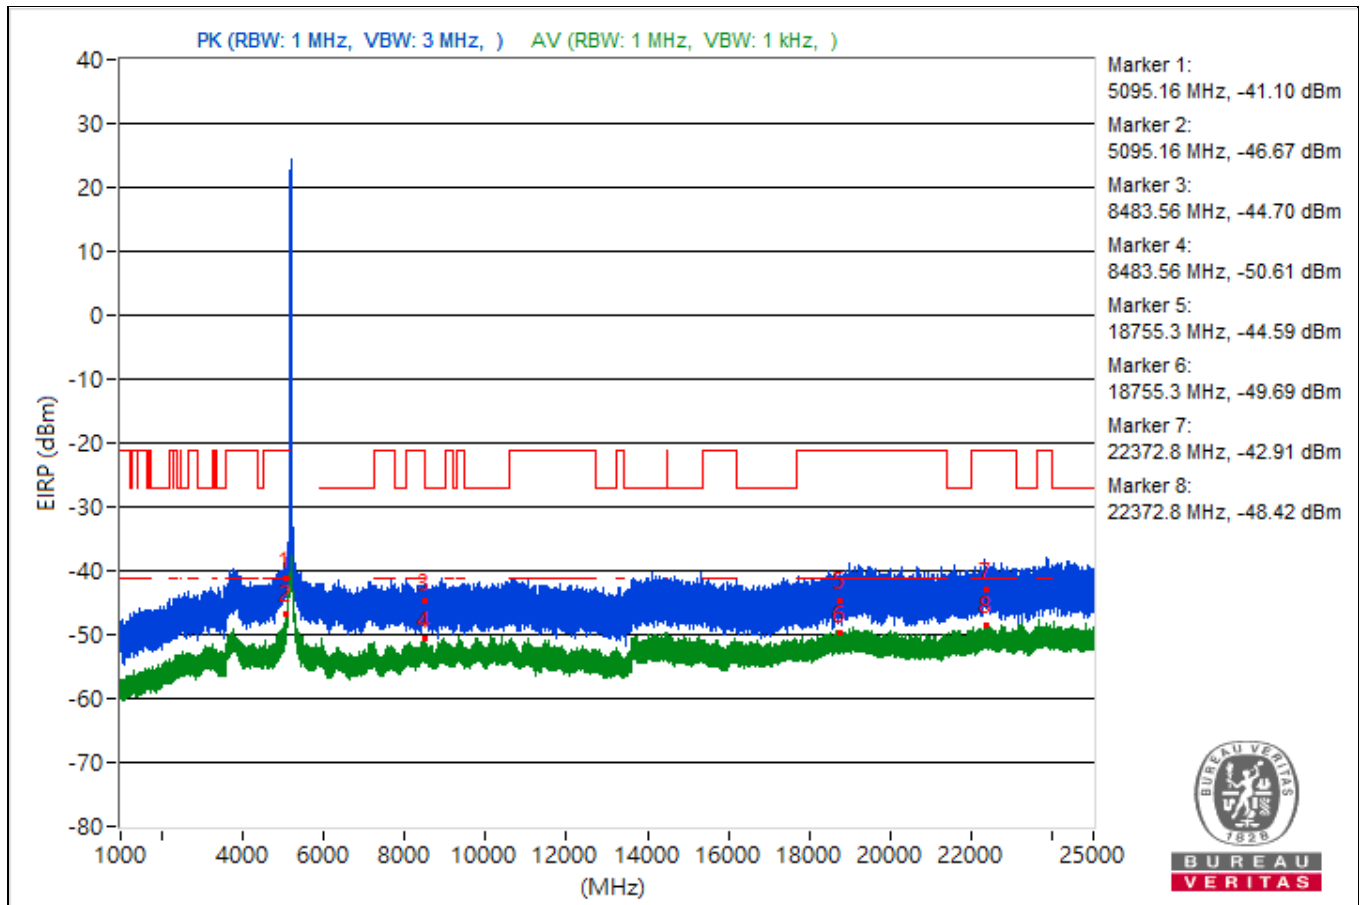


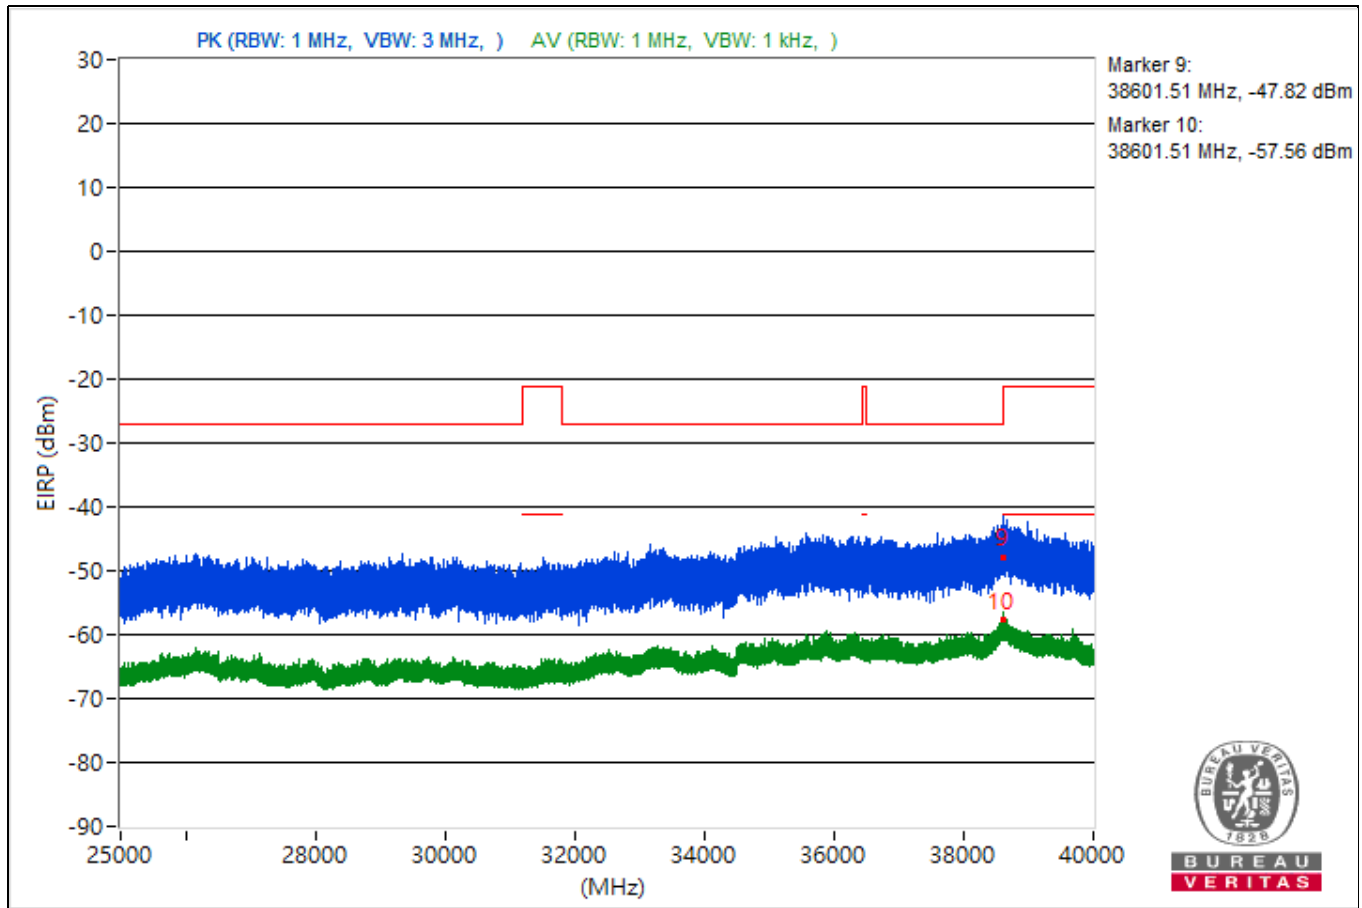


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5090.1	53.32 PK	74	-20.68	-52.21	-53.67	7.93	-41.94
2	5090.1	47.92 AV	54	-6.08	-57.33	-59.5	7.93	-47.34
3	8434.04	49.39 PK	74	-24.61	-57.8	-56.01	7.93	-45.87
4	8434.04	44.51 AV	54	-9.49	-63.69	-60.34	7.93	-50.75
5	18541	53.18 PK	74	-20.82	-54.74	-51.8	7.93	-42.08
6	18541	45.71 AV	54	-8.29	-62.77	-59.01	7.93	-49.55
7	22359.1	53.32 PK	74	-20.68	-51.75	-54.42	7.93	-41.94
8	22359.1	47.13 AV	54	-6.87	-57.58	-61.36	7.93	-48.13
9	38624.98	47.77 PK	74	-26.23	-56.74	-61.25	7.93	-47.49
10	38624.98	37.23 AV	54	-16.77	-67.97	-70.27	7.93	-58.03

Note: Margin value = Emission Level - Limit value

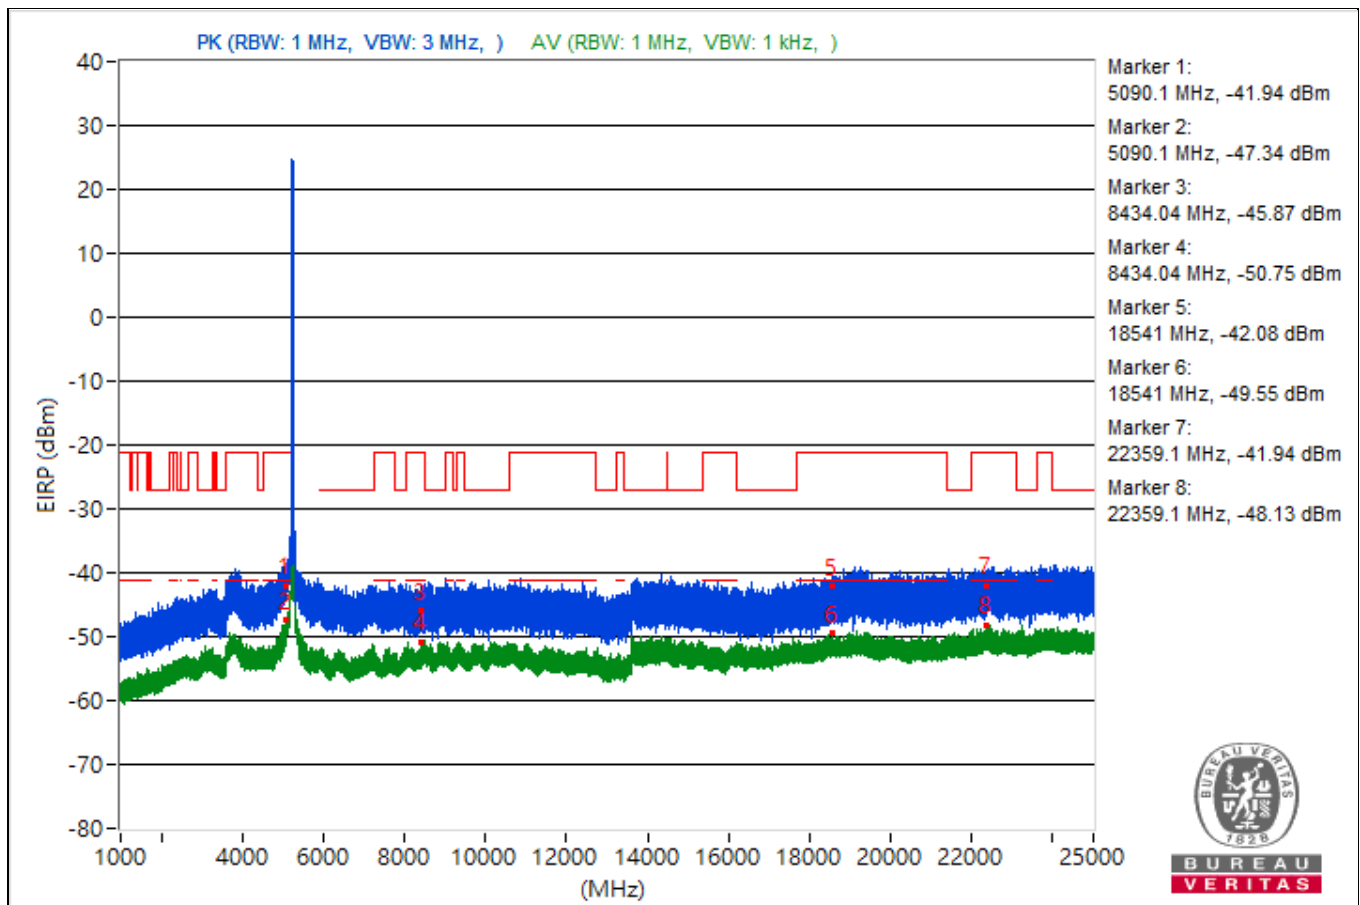


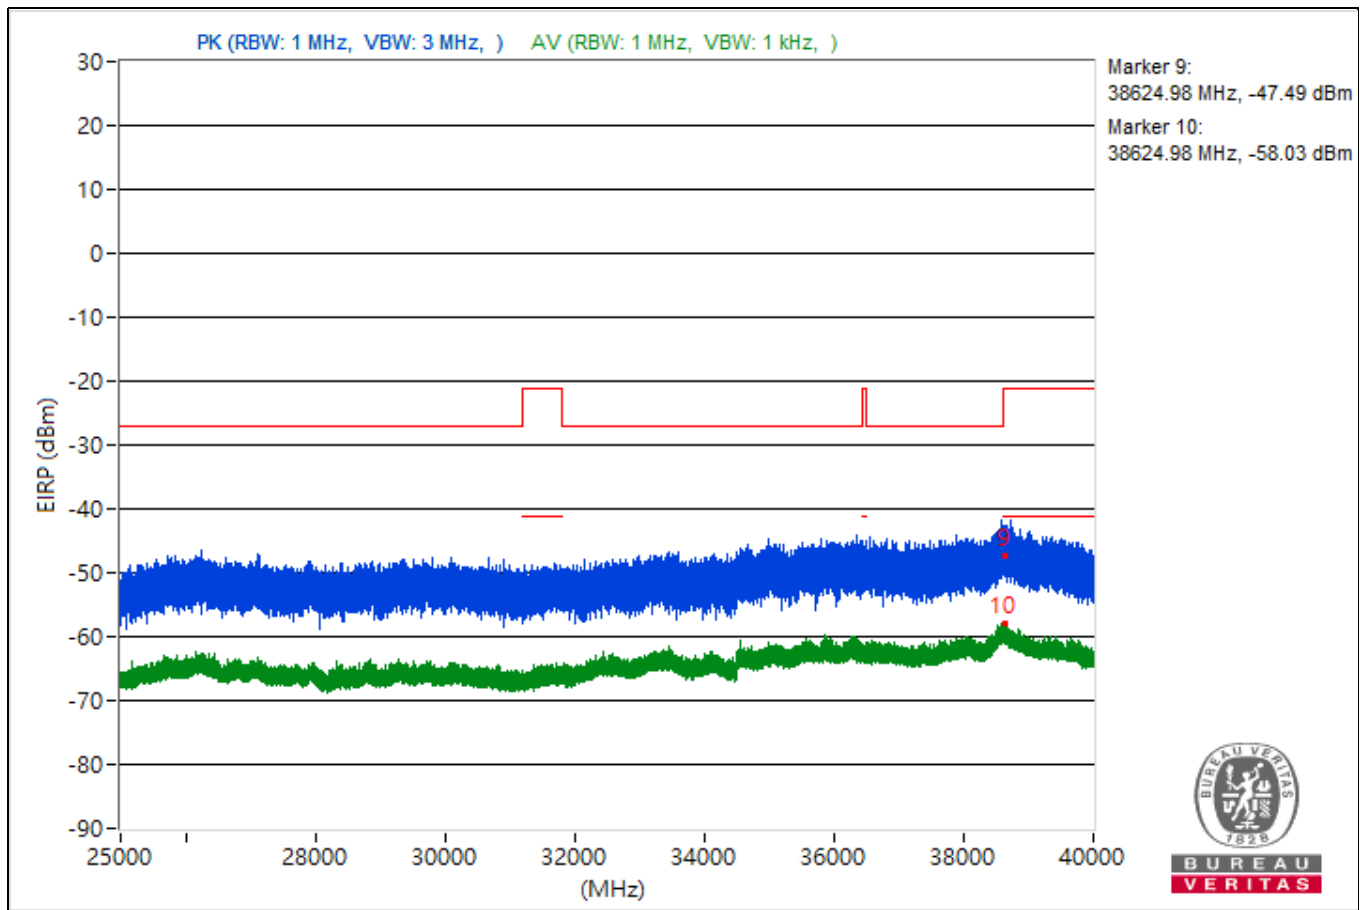


RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5093.83	53.69 PK	74	-20.31	-53.78	-51.53	7.93	-41.57
2	5093.83	47.99 AV	54	-6.01	-57.47	-59.1	7.93	-47.27
3	9327.38	48.81 PK	74	-25.19	-58.51	-56.49	7.93	-46.45
4	9327.38	44.8 AV	54	-9.2	-63.23	-60.11	7.93	-50.46
5	18998.5	52.85 PK	74	-21.15	-53.63	-53.08	7.93	-42.41
6	18998.5	45.37 AV	54	-8.63	-59.96	-61.92	7.93	-49.89
7	23706.4	52.17 PK	74	-21.83	-54.45	-53.64	7.93	-43.09
8	23706.4	46.88 AV	54	-7.12	-62.21	-57.6	7.93	-48.38
9	38614.49	46.71 PK	74	-27.29	-59.48	-59.5	7.93	-48.55
10	38614.49	37.36 AV	54	-16.64	-67.22	-71.45	7.93	-57.9

Note: Margin value = Emission Level - Limit value

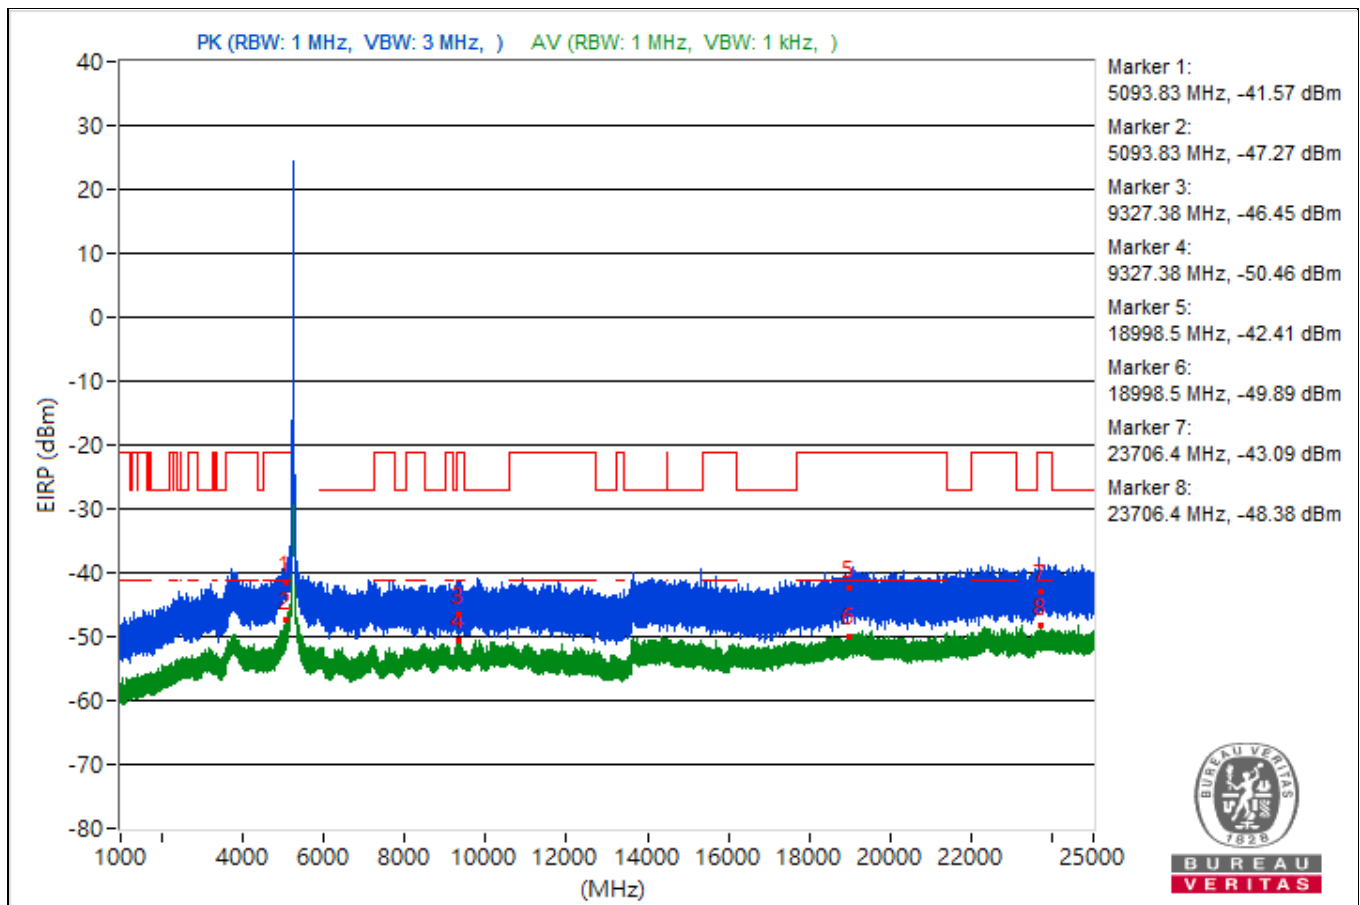


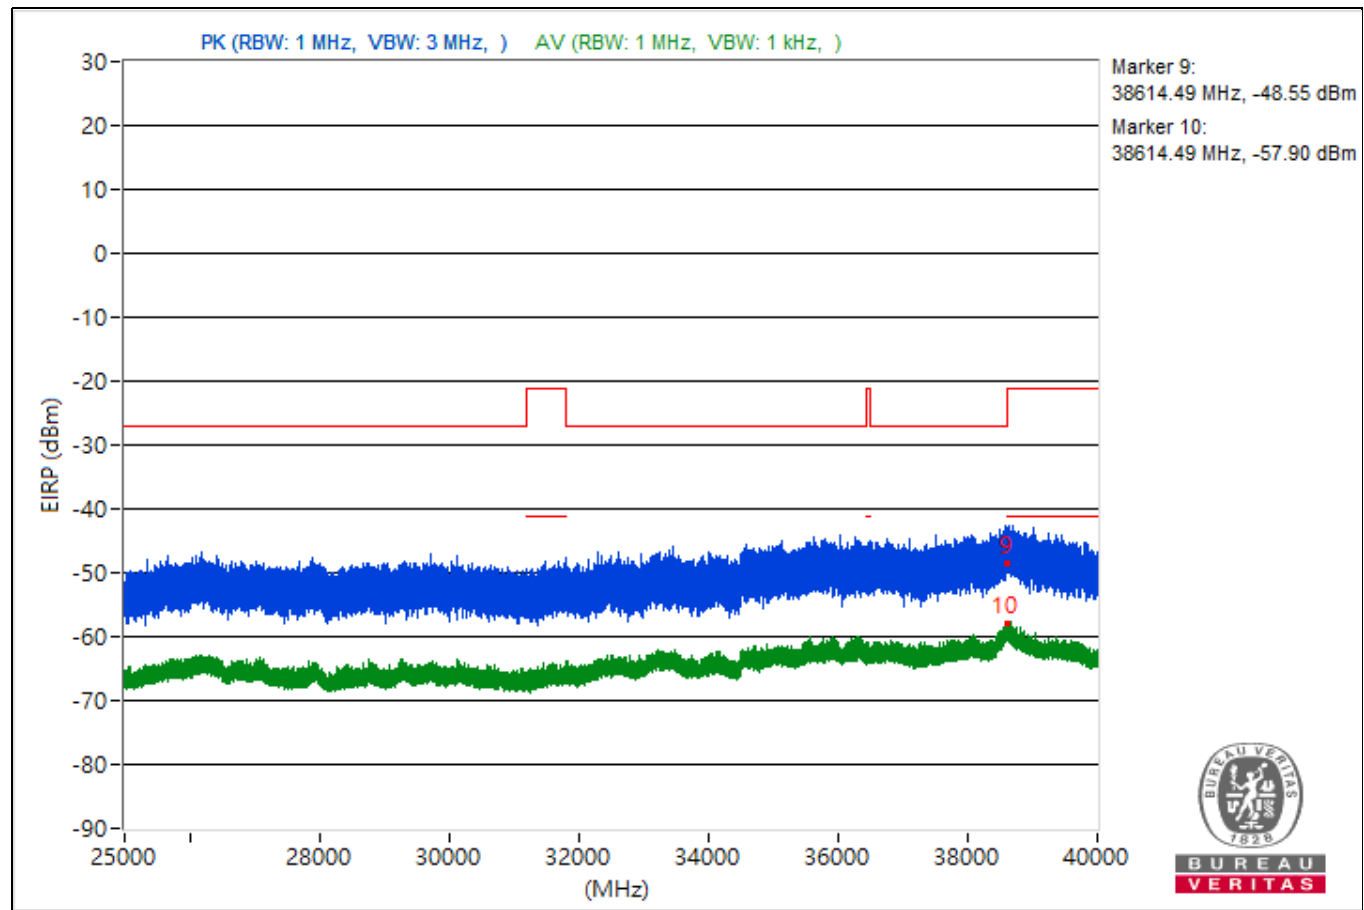


RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5094.14	54.08 PK	74	-19.92	-52.5	-51.77	7.93	-41.18
2	5094.14	47.16 AV	54	-6.84	-57.83	-60.71	7.93	-48.1
3	9380.98	47.67 PK	74	-26.33	-59.44	-57.77	7.93	-47.59
4	9380.98	44.44 AV	54	-9.56	-62.77	-60.94	7.93	-50.82
5	18970.2	53.03 PK	74	-20.97	-53.06	-53.28	7.93	-42.23
6	18970.2	45.21 AV	54	-8.79	-59.25	-63.95	7.93	-50.05
7	23602.4	51.37 PK	74	-22.63	-54.52	-55.17	7.93	-43.89
8	23602.4	47.46 AV	54	-6.54	-57.58	-60.33	7.93	-47.8
9	38674.04	48.07 PK	74	-25.93	-57.2	-59.3	7.93	-47.19
10	38674.04	35.81 AV	54	-18.19	-68.69	-73.21	7.93	-59.45

Note: Margin value = Emission Level - Limit value

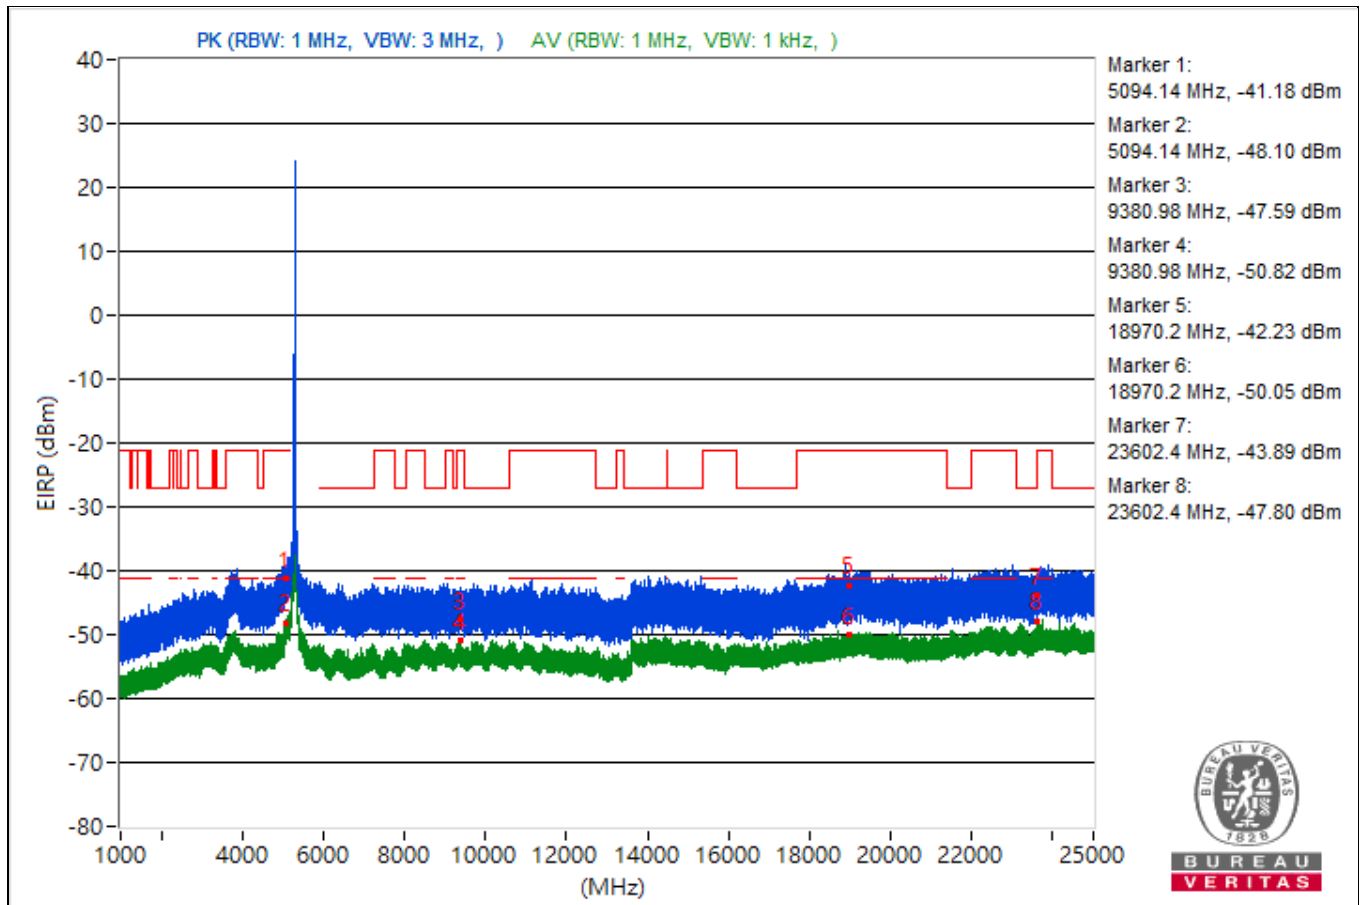


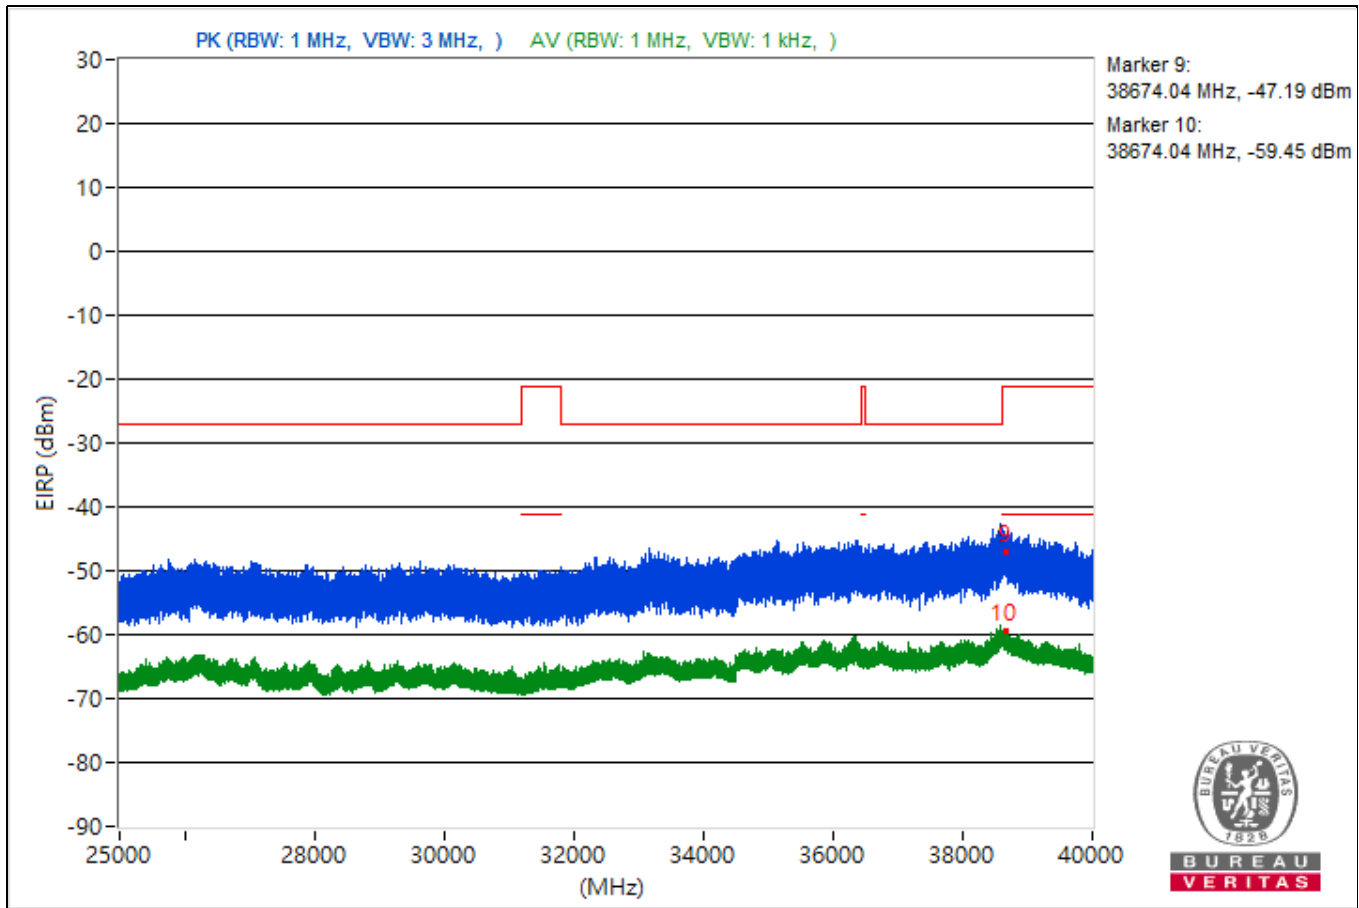


RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5091.66	51.31 PK	74	-22.69	-55.21	-54.58	7.93	-43.95
2	5091.66	46.08 AV	54	-7.92	-59.06	-61.52	7.93	-49.18
3	10649.16	51.76 PK	74	-22.24	-55.6	-53.52	7.93	-43.5
4	10649.16	43.97 AV	54	-10.03	-63.84	-61.06	7.93	-51.29
5	18611.3	50.57 PK	74	-23.43	-56.1	-55.2	7.93	-44.69
6	18611.3	44.56 AV	54	-9.44	-63.6	-60.3	7.93	-50.7
7	22827.9	53.58 PK	74	-20.42	-54.9	-51.14	7.93	-41.68
8	22827.9	46.02 AV	54	-7.98	-62.94	-58.5	7.93	-49.24
9	38606.4	48.7 PK	74	-25.3	-55.94	-59.95	7.93	-46.56
10	38606.4	35.84 AV	54	-18.16	-69.55	-71.35	7.93	-59.42

Note: Margin value = Emission Level - Limit value

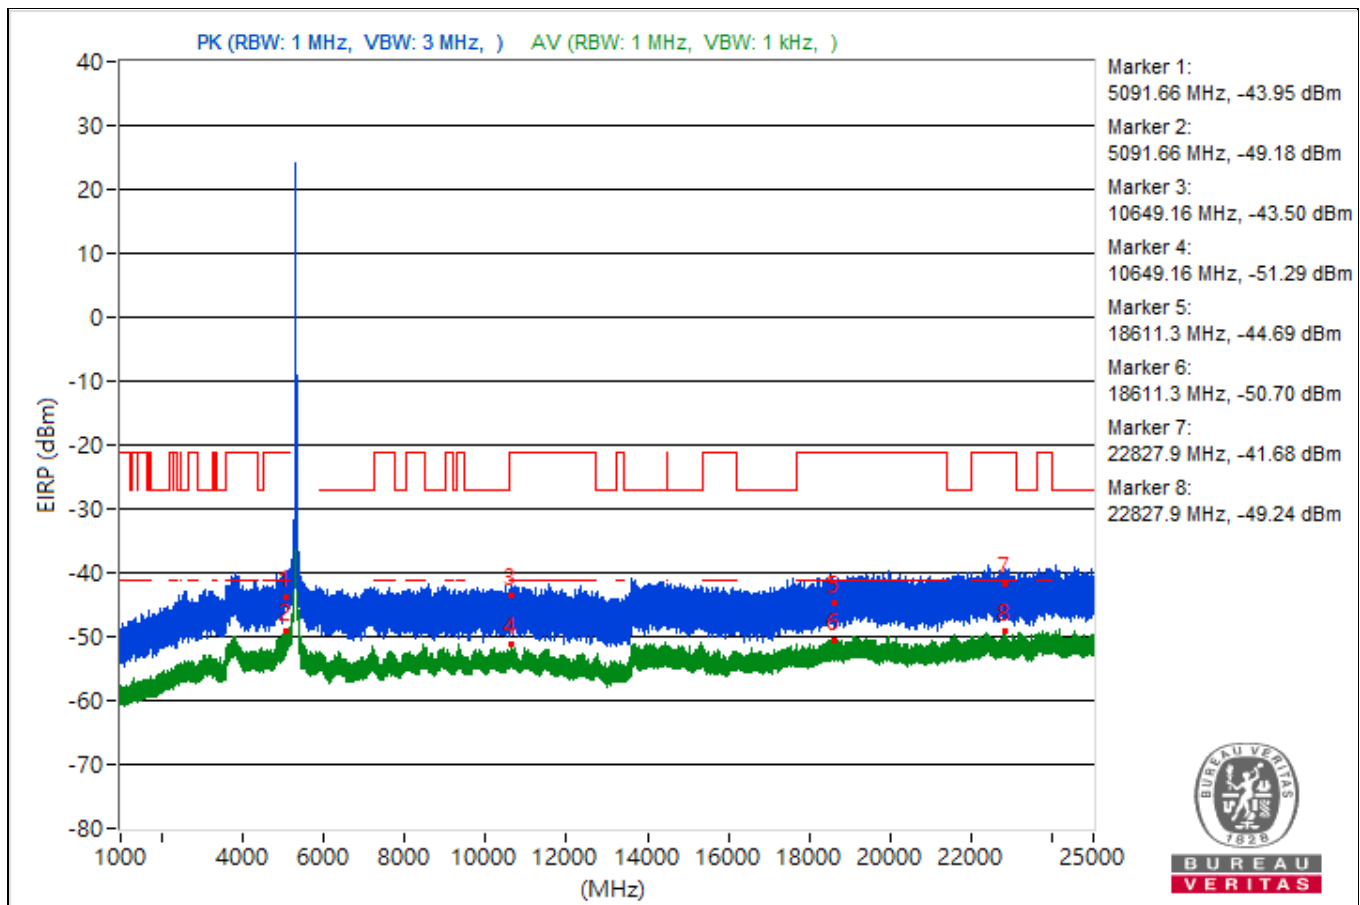


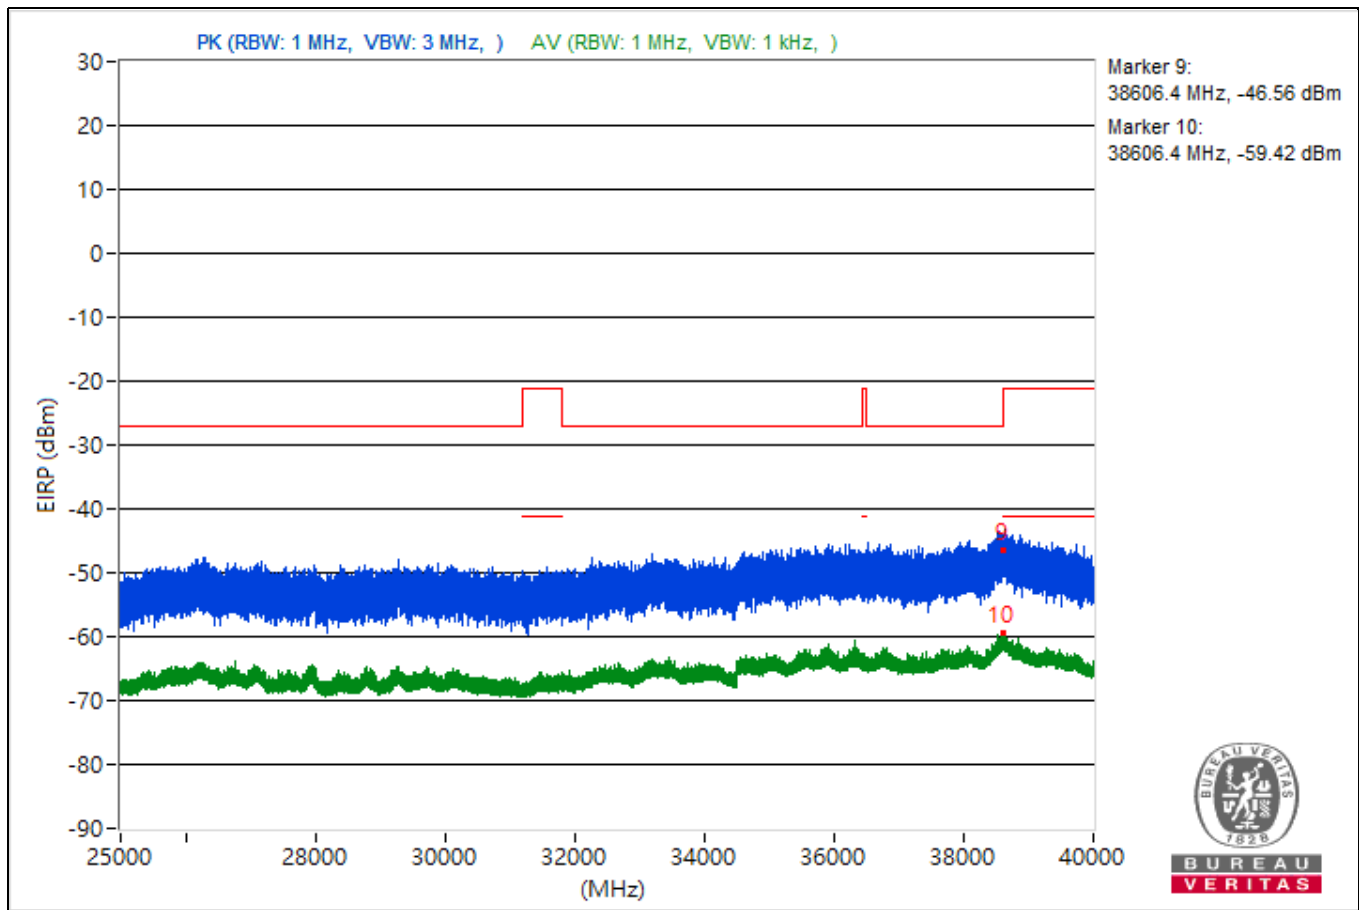


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3779.62	52.08 PK	74	-21.92	-54.2	-54.03	7.93	-43.18
2	3779.62	44.7 AV	54	-9.3	-60.25	-63.25	7.93	-50.56
3	8482.58	48.8 PK	74	-25.2	-57.8	-57.03	7.93	-46.46
4	8482.58	43.12 AV	54	-10.88	-61.37	-65.94	7.93	-52.14
5	18965.7	51.63 PK	74	-22.37	-53.94	-55.3	7.93	-43.63
6	18965.7	44.5 AV	54	-9.5	-63.71	-60.33	7.93	-50.76
7	23703.9	52.94 PK	74	-21.06	-52.72	-53.88	7.93	-42.32
8	23703.9	46.25 AV	54	-7.75	-58.48	-62.18	7.93	-49.01
9	38610.4	47.92 PK	74	-26.08	-61.5	-56.46	7.93	-47.34
10	38610.4	35.09 AV	54	-18.91	-72.11	-70.3	7.93	-60.17

Note: Margin value = Emission Level - Limit value

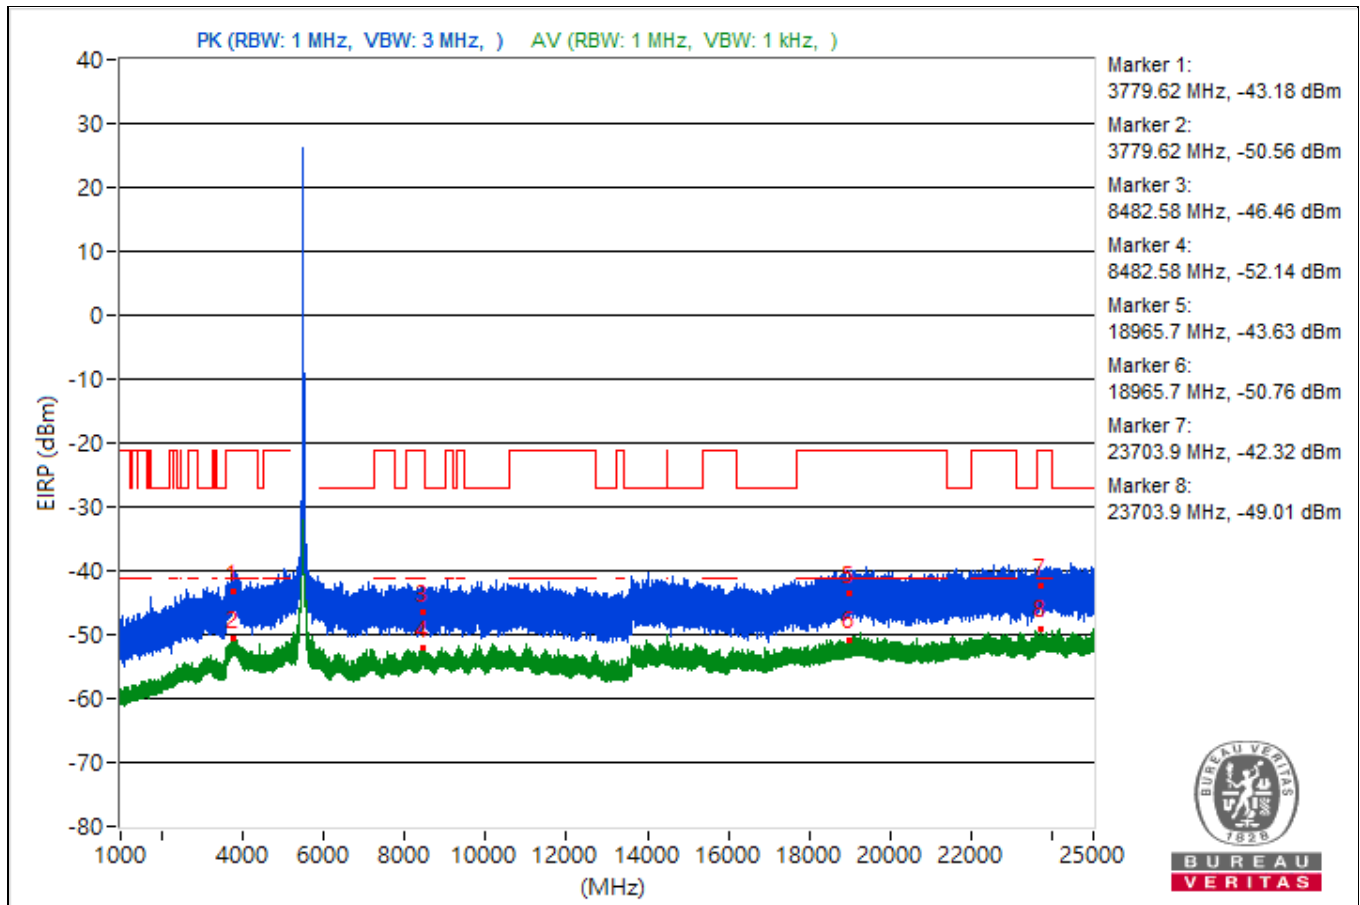


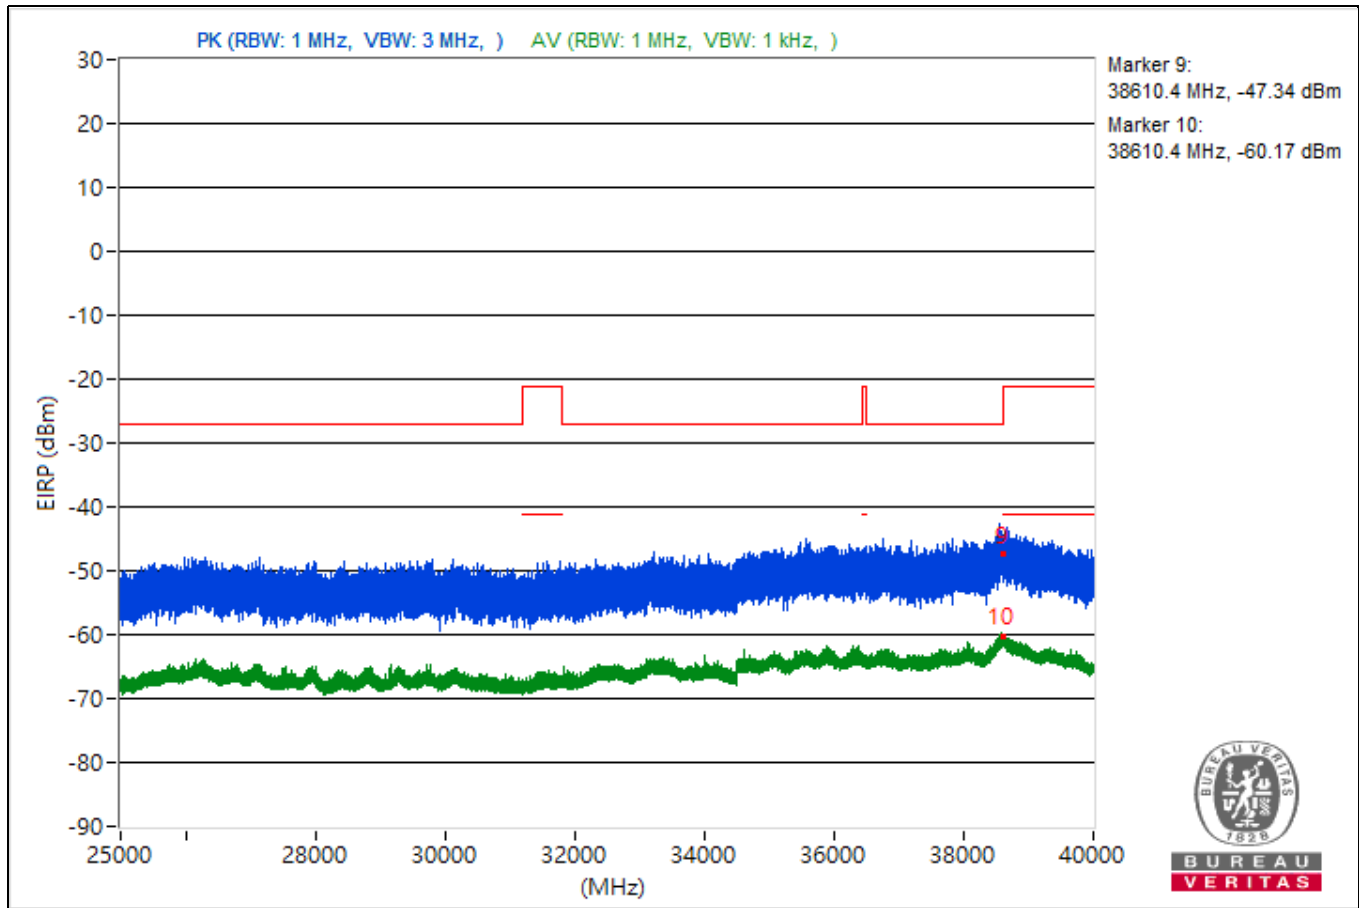


RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3829.4	52.43 PK	74	-21.57	-54.26	-53.33	7.93	-42.83
2	3829.4	45.28 AV	54	-8.72	-59.68	-62.66	7.93	-49.98
3	9383.91	50.91 PK	74	-23.09	-60.38	-53.01	7.93	-44.35
4	9383.91	43.36 AV	54	-10.64	-61.22	-65.46	7.93	-51.9
5	18798.6	51.19 PK	74	-22.81	-55.06	-54.97	7.93	-44.07
6	18798.6	44.95 AV	54	-9.05	-59.75	-63.57	7.93	-50.31
7	22416.2	53.81 PK	74	-20.19	-52.09	-52.72	7.93	-41.45
8	22416.2	45.92 AV	54	-8.08	-62.04	-59.04	7.93	-49.34
9	38606.31	49.48 PK	74	-24.52	-56.29	-57.2	7.93	-45.78
10	38606.31	35.58 AV	54	-18.42	-71.35	-70	7.93	-59.68

Note: Margin value = Emission Level - Limit value

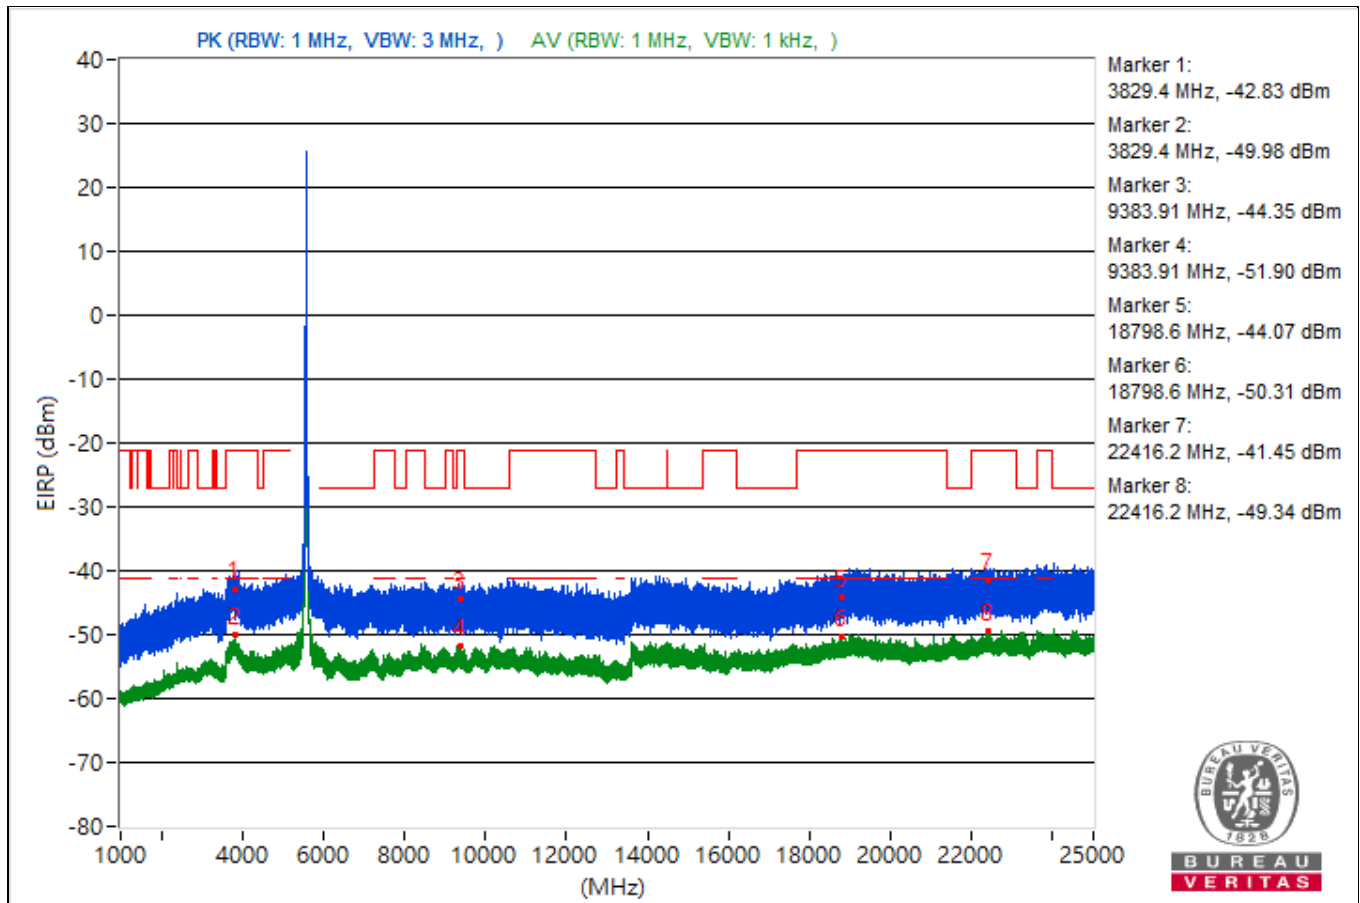


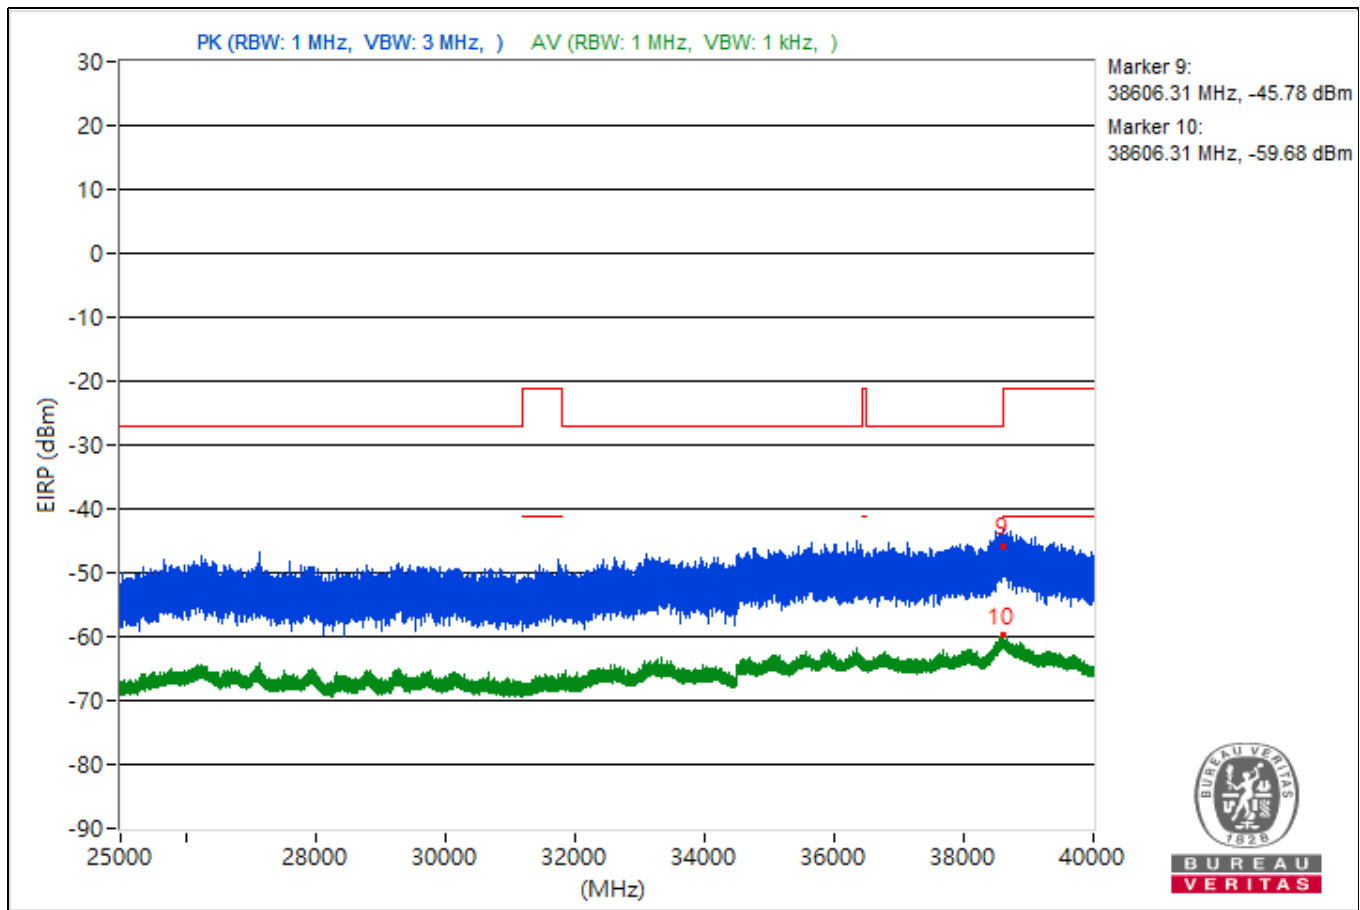


RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.74	50.46 PK	74	-23.54	-55.4	-56.11	7.93	-44.8
2	3790.74	43.88 AV	54	-10.12	-61.41	-63.48	7.93	-51.38
3	8487.02	48.79 PK	74	-25.21	-56.03	-59.45	7.93	-46.47
4	8487.02	43.16 AV	54	-10.84	-62.02	-64.37	7.93	-52.1
5	18842.5	52.53 PK	74	-21.47	-54.24	-53.17	7.93	-42.73
6	18842.5	44.74 AV	54	-9.26	-62.35	-60.72	7.93	-50.52
7	23815.9	50.76 PK	74	-23.24	-54.6	-56.48	7.93	-44.5
8	23815.9	45.86 AV	54	-8.14	-62.8	-58.78	7.93	-49.4
9	38641.87	48.74 PK	74	-25.26	-60.64	-55.65	7.93	-46.52
10	38641.87	34.98 AV	54	-19.02	-70.44	-72.16	7.93	-60.28

Note: Margin value = Emission Level - Limit value

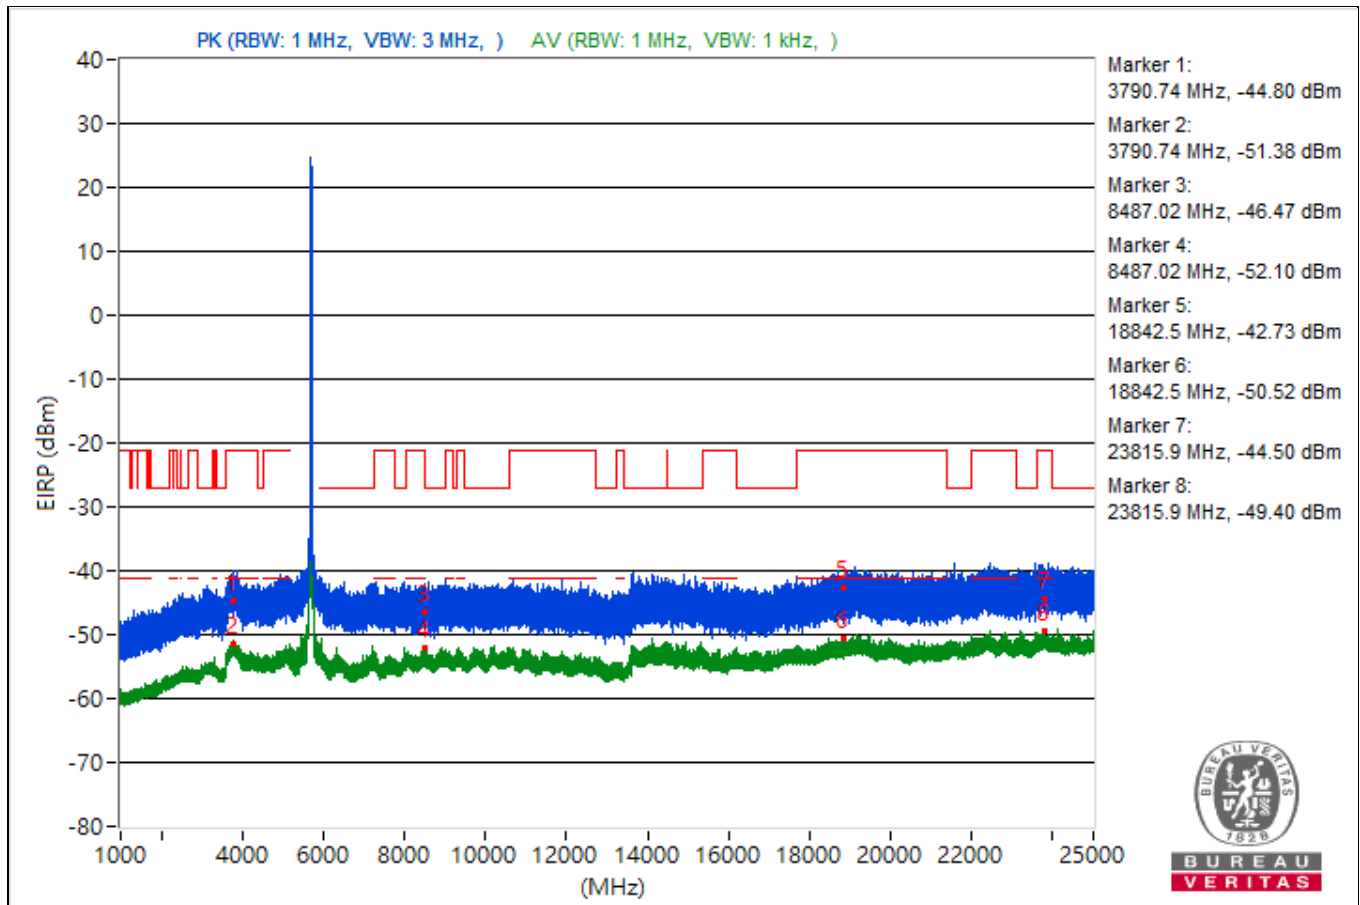


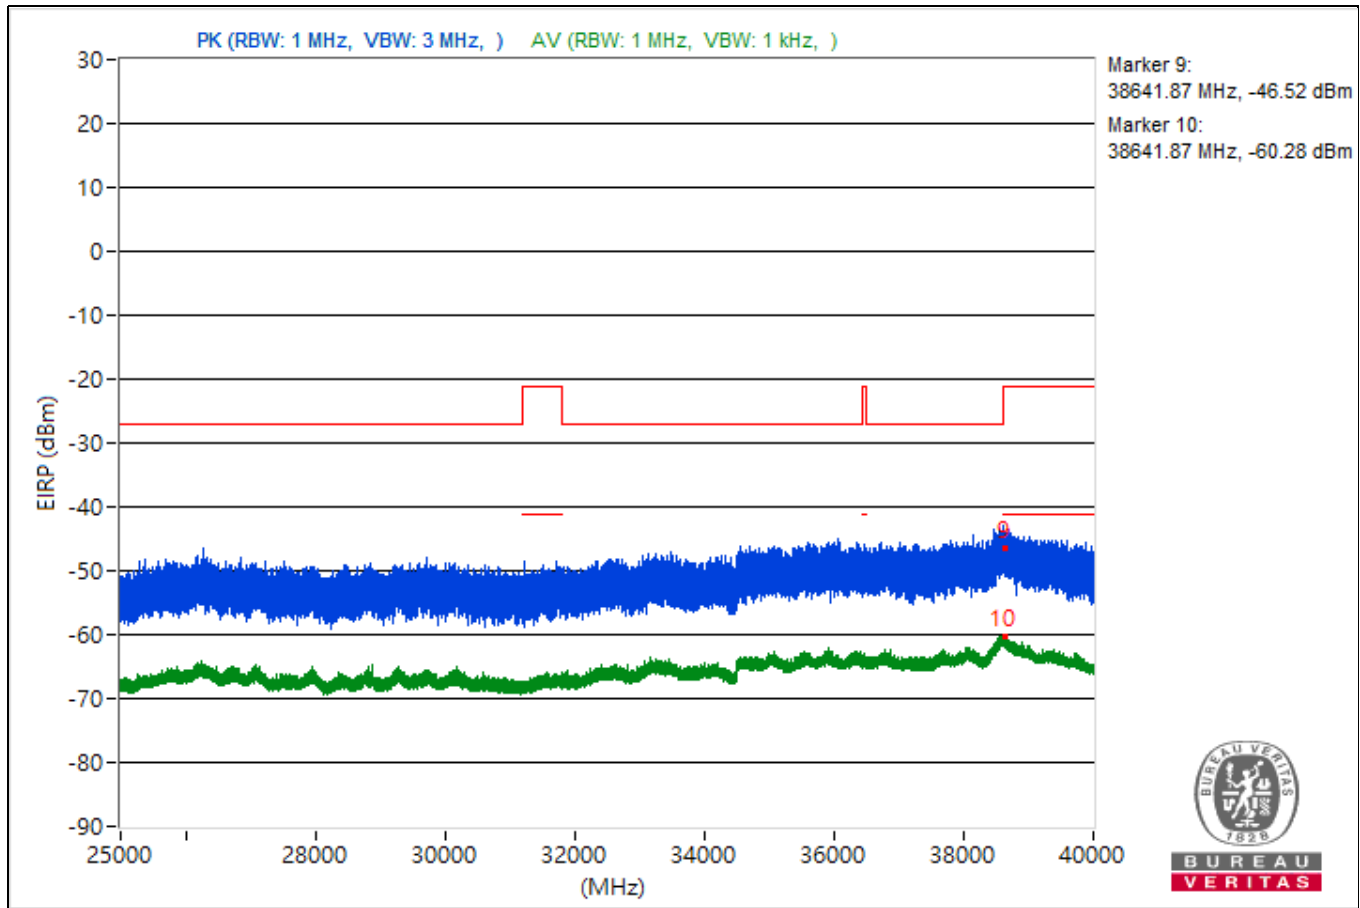


RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3908.34	52.06 PK	74	-21.94	-54.21	-54.07	7.93	-43.2
2	3908.34	43.71 AV	54	-10.29	-63.85	-61.46	7.93	-51.55
3	9304.62	50.74 PK	74	-23.26	-55.47	-55.44	7.93	-44.52
4	9304.62	43.21 AV	54	-10.79	-64.81	-61.71	7.93	-52.05
5	18863.6	51.33 PK	74	-22.67	-55.26	-54.51	7.93	-43.93
6	18863.6	45.13 AV	54	-8.87	-60.33	-61.98	7.93	-50.13
7	22380.7	53.01 PK	74	-20.99	-53.29	-53.08	7.93	-42.25
8	22380.7	45.49 AV	54	-8.51	-59.45	-62.5	7.93	-49.77
9	38628.8	50.04 PK	74	-23.96	-55.05	-57.67	7.93	-45.22
10	38628.8	35.43 AV	54	-18.57	-71.21	-70.36	7.93	-59.83

Note: Margin value = Emission Level - Limit value

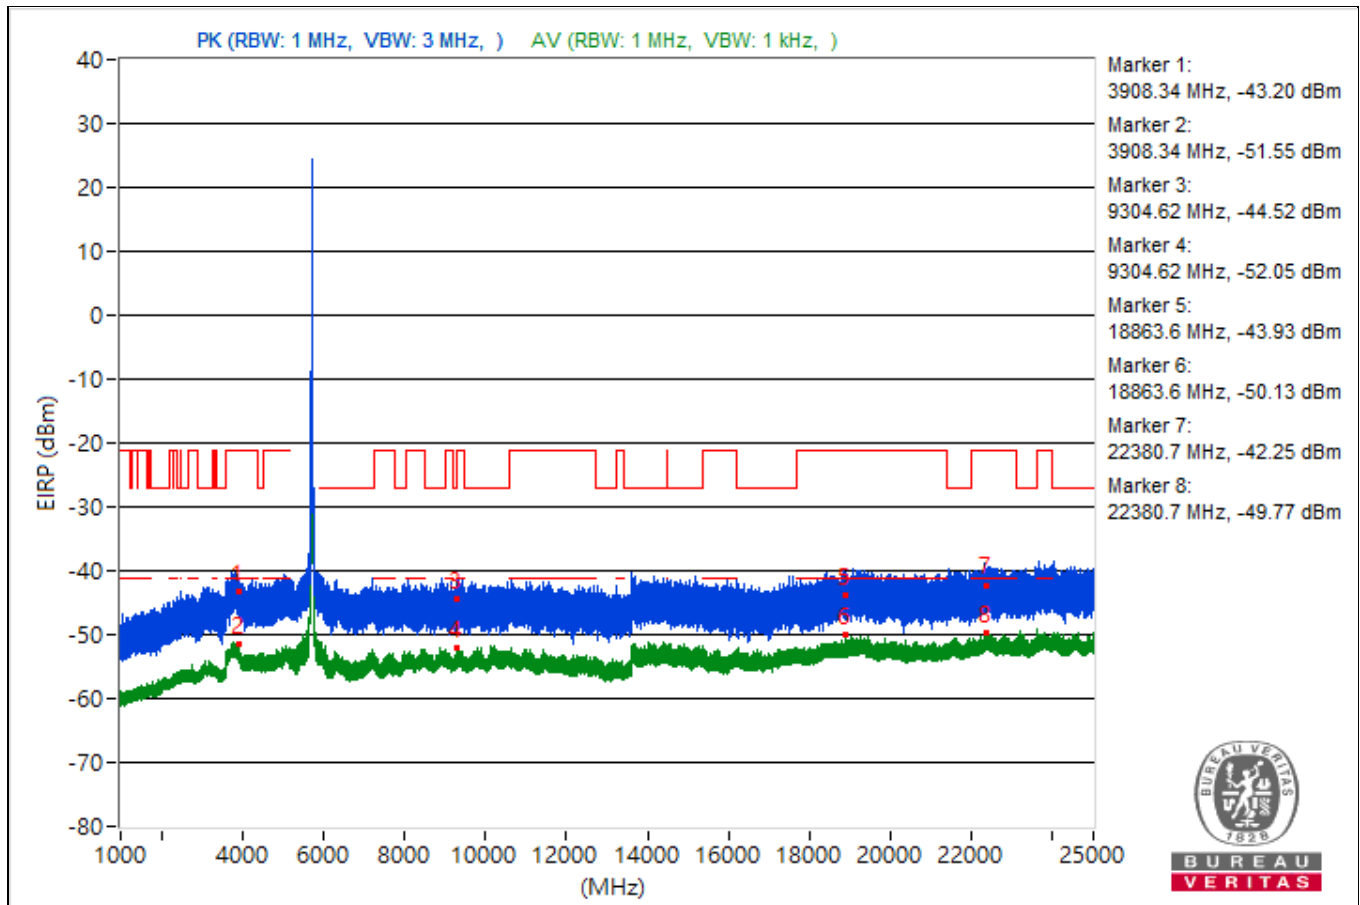


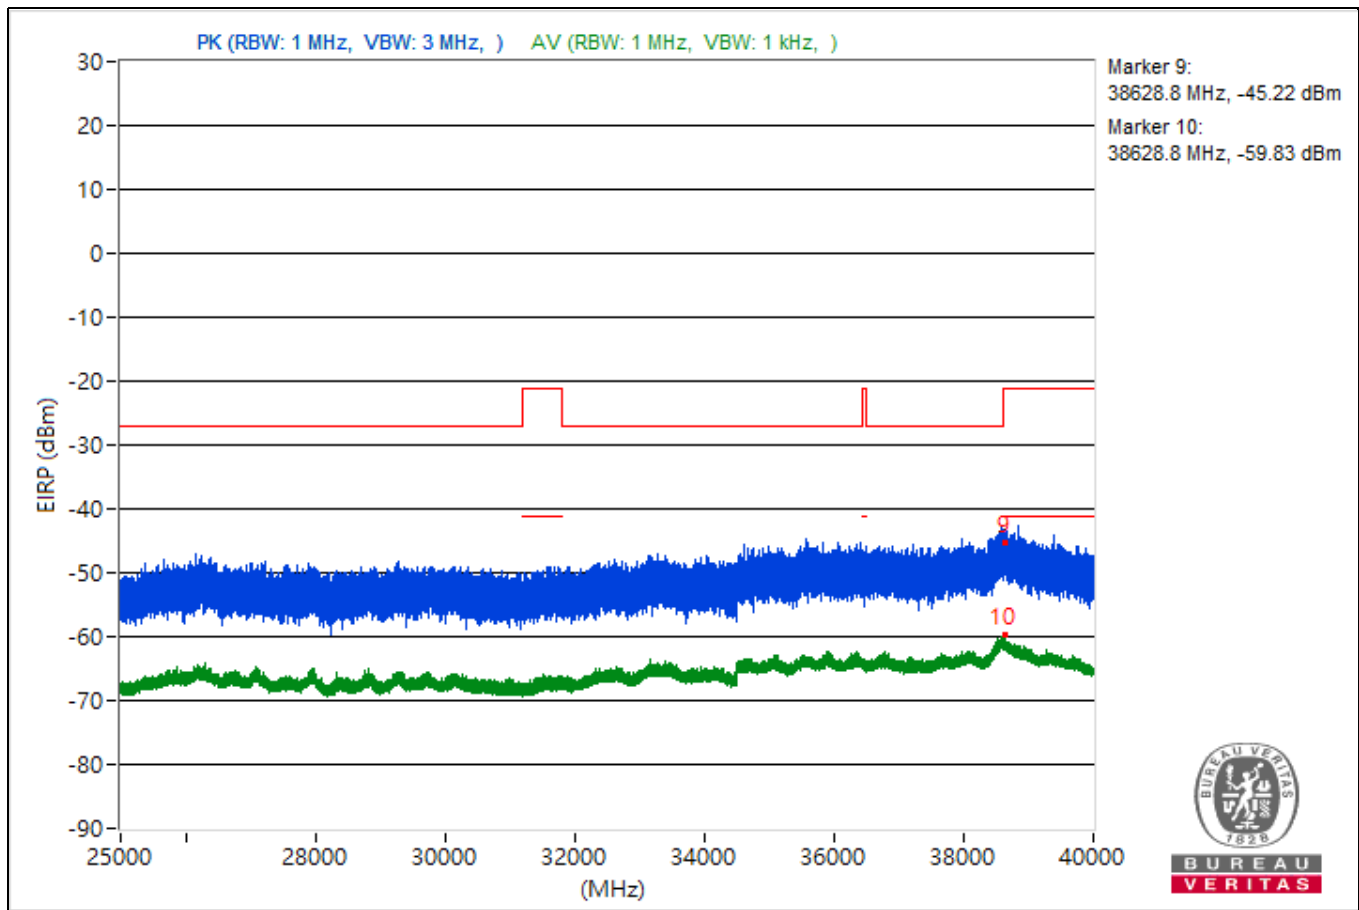


RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3741.43	51.13 PK	74	-22.87	-54.44	-55.82	7.93	-44.13
2	3741.43	44.01 AV	54	-9.99	-63.44	-61.22	7.93	-51.25
3	11492.27	50.78 PK	74	-23.22	-54.27	-56.99	7.93	-44.48
4	11492.27	43.77 AV	54	-10.23	-64.19	-61.18	7.93	-51.49
5	18958	49.59 PK	74	-24.41	-57.03	-56.22	7.93	-45.67
6	18958	45.33 AV	54	-8.67	-60.77	-60.97	7.93	-49.93
7	23690.8	50.2 PK	74	-23.8	-55.18	-57	7.93	-45.06
8	23690.8	45.69 AV	54	-8.31	-61.87	-59.48	7.93	-49.57
9	38606.93	48.47 PK	74	-25.53	-56.52	-59.41	7.93	-46.79
10	38606.93	35.19 AV	54	-18.81	-71.25	-70.78	7.93	-60.07

Note: Margin value = Emission Level - Limit value

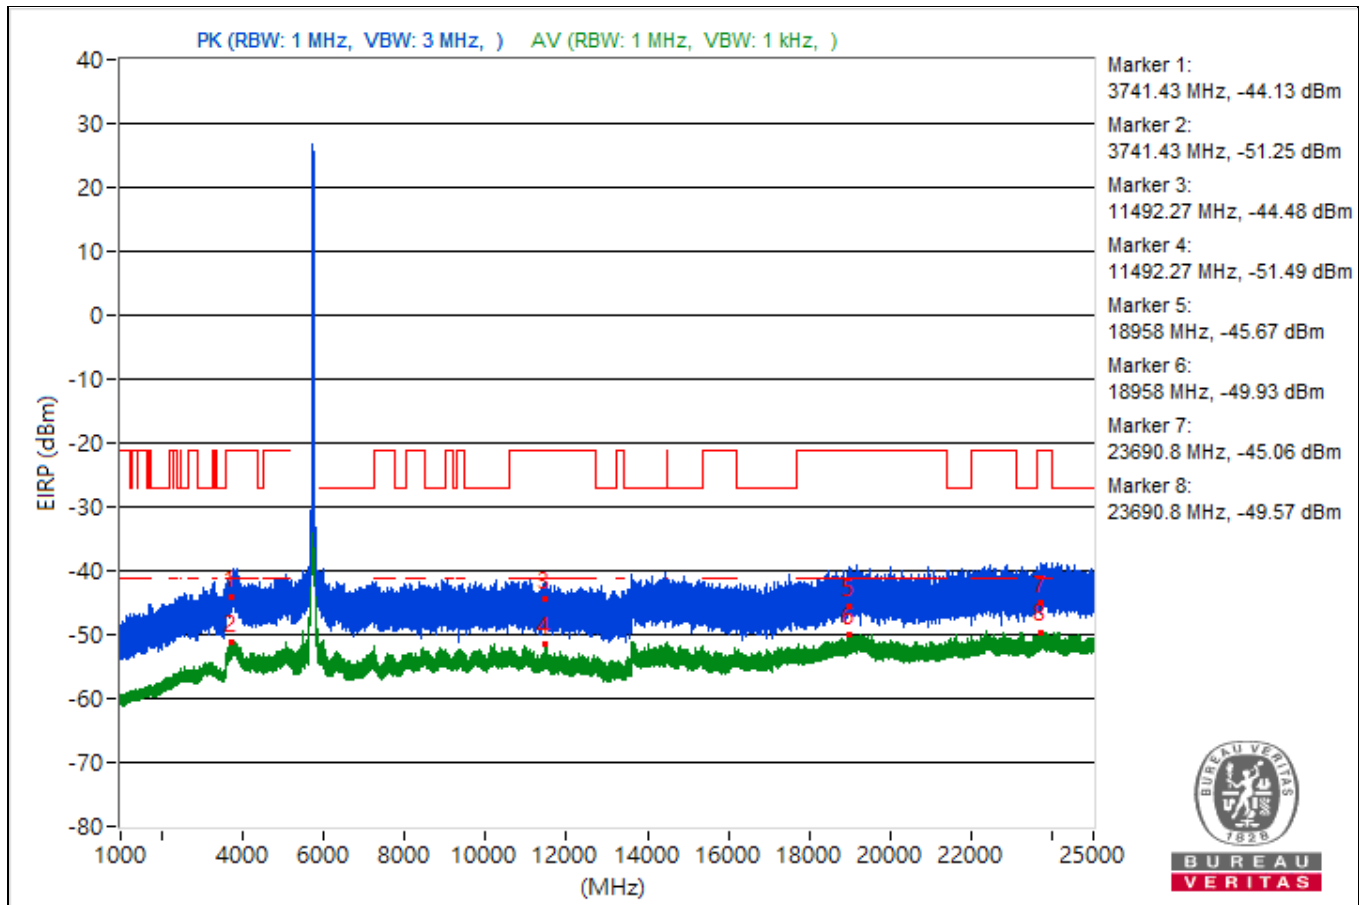


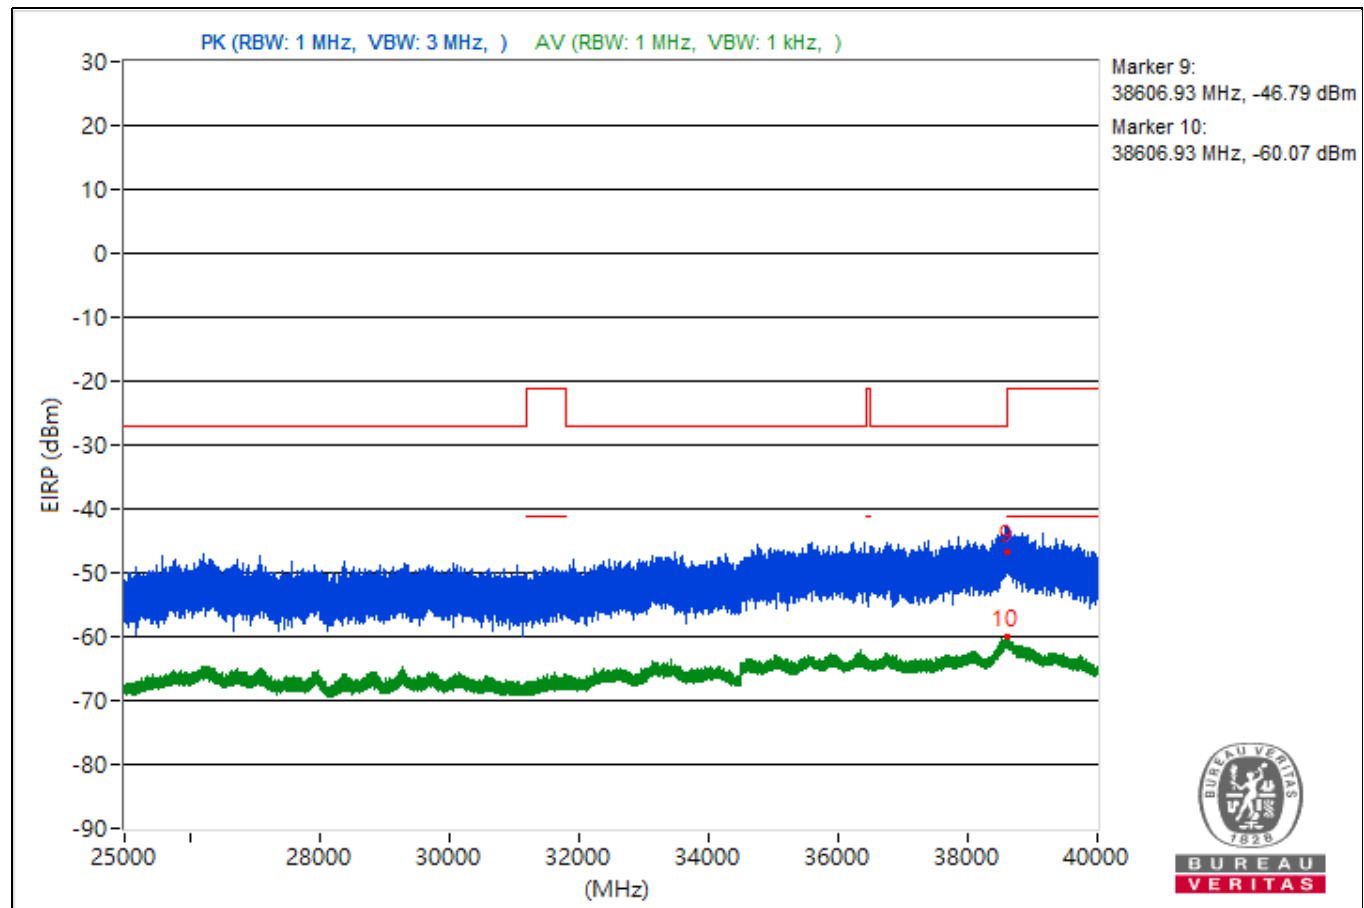


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.64	51.33 PK	74	-22.67	-54.86	-54.89	7.93	-43.93
2	3809.64	45.12 AV	54	-8.88	-59.77	-62.95	7.93	-50.14
3	8495.47	48.92 PK	74	-25.08	-58.61	-56.26	7.93	-46.34
4	8495.47	43.22 AV	54	-10.78	-64.27	-61.98	7.93	-52.04
5	18993.9	52.58 PK	74	-21.42	-54.59	-52.83	7.93	-42.68
6	18993.9	44.41 AV	54	-9.59	-60.7	-63.26	7.93	-50.85
7	22380.7	52.2 PK	74	-21.8	-53.01	-55.28	7.93	-43.06
8	22380.7	45.6 AV	54	-8.4	-61.74	-59.69	7.93	-49.66
9	38624.09	47.2 PK	74	-26.8	-59.07	-58.93	7.93	-48.06
10	38624.09	35.16 AV	54	-18.84	-70.37	-71.82	7.93	-60.1

Note: Margin value = Emission Level - Limit value

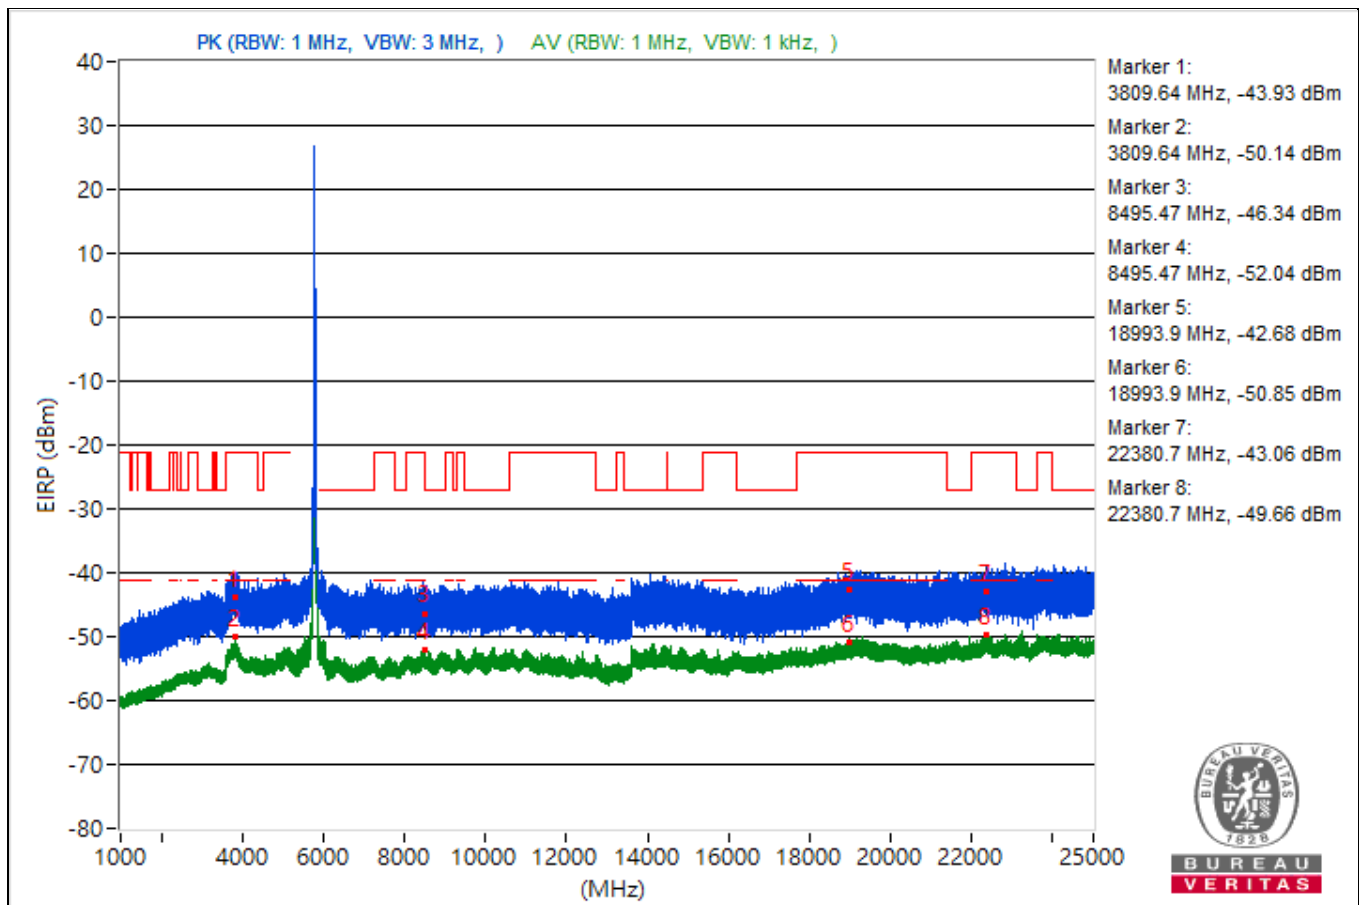


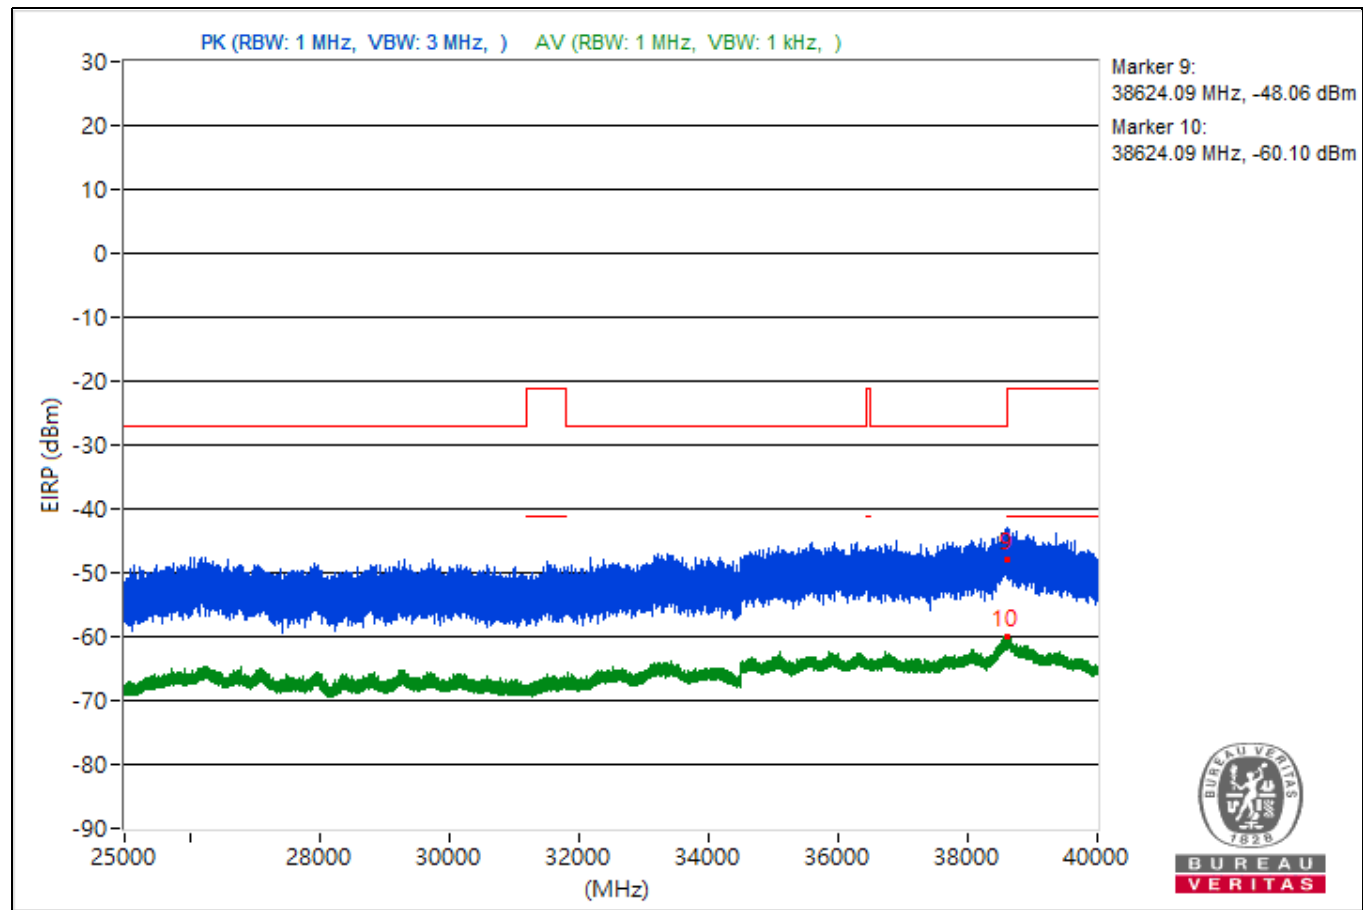


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.39	52.79 PK	74	-21.21	-54.35	-52.64	7.93	-42.47
2	3807.39	44.62 AV	54	-9.38	-63.49	-60.26	7.93	-50.64
3	8452	50.98 PK	74	-23.02	-56.01	-54.55	7.93	-44.28
4	8452	43.3 AV	54	-10.7	-61.49	-64.99	7.93	-51.96
5	18881	49.81 PK	74	-24.19	-55.95	-56.88	7.93	-45.45
6	18881	44.5 AV	54	-9.5	-63.27	-60.56	7.93	-50.76
7	22490	51.77 PK	74	-22.23	-52.87	-56.88	7.93	-43.49
8	22490	45.68 AV	54	-8.32	-62.33	-59.25	7.93	-49.58
9	38625.69	46.11 PK	74	-27.89	-59.72	-60.51	7.93	-49.15
10	38625.69	34.99 AV	54	-19.01	-70.66	-71.83	7.93	-60.27

Note: Margin value = Emission Level - Limit value

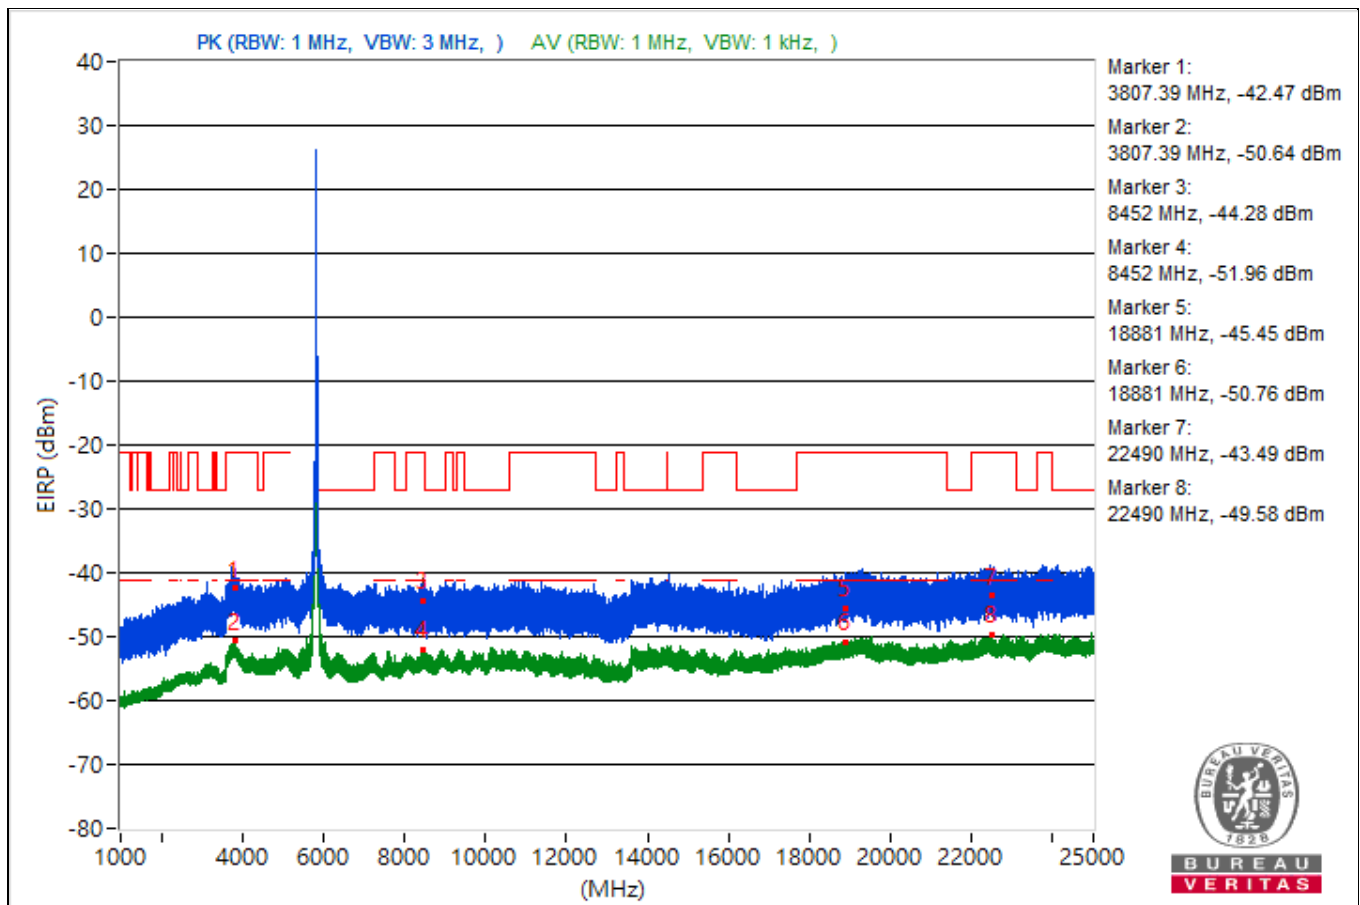


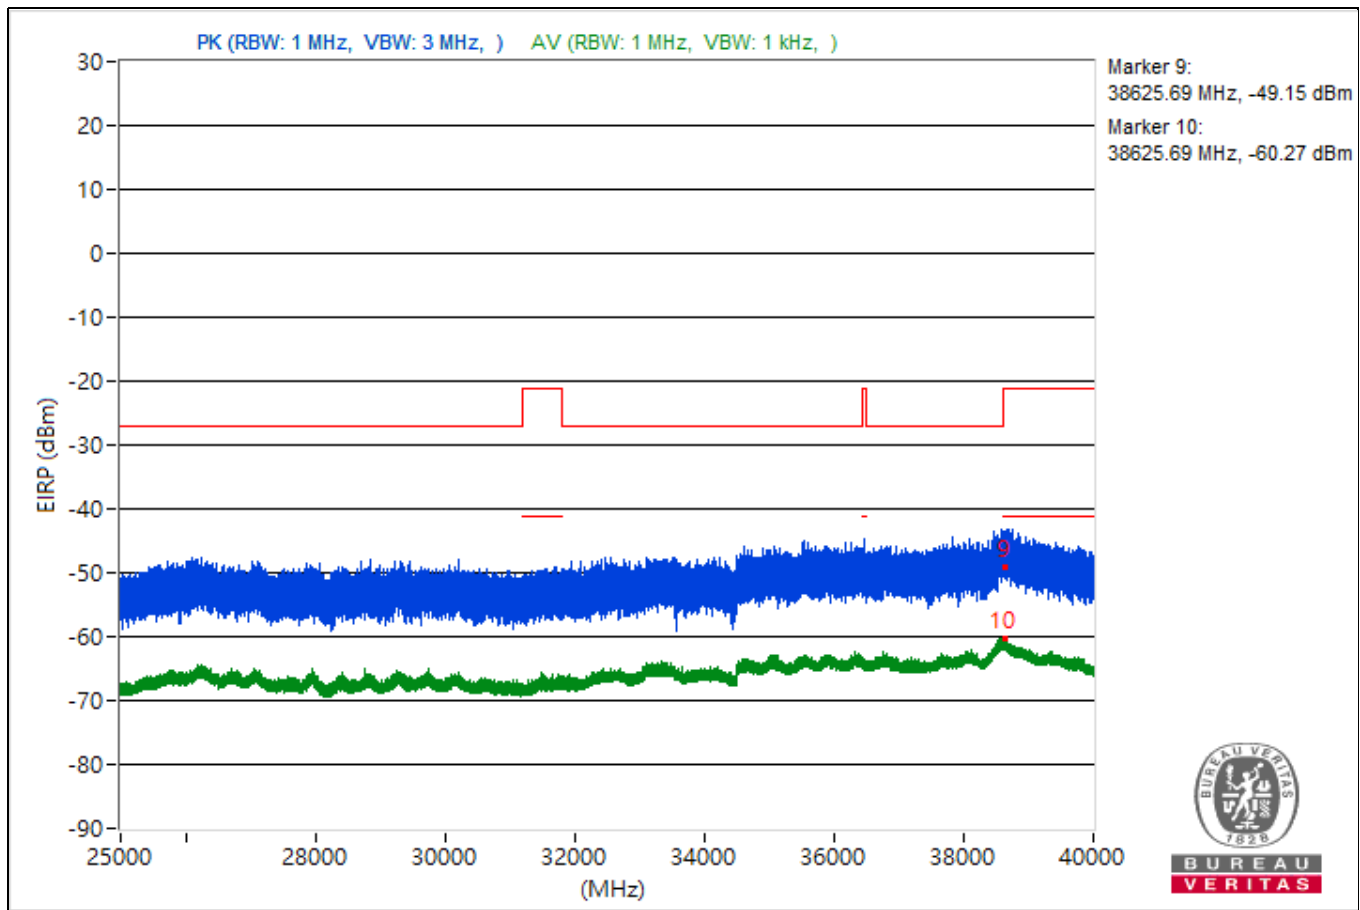


RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.59	54.47 PK	74	-19.53	-49.46	-48.08	4.92	-40.79
2	5099.59	47.59 AV	54	-6.41	-54.89	-56.46	4.92	-47.67
3	10652.71	47.6 PK	74	-26.4	-54.52	-57.02	4.92	-47.66
4	10652.71	42.16 AV	54	-11.84	-64.41	-59.16	4.92	-53.1
5	18804.4	48.41 PK	74	-25.59	-53.78	-56.07	4.92	-46.85
6	18804.4	43.81 AV	54	-10.19	-58.64	-60.26	4.92	-51.45
7	23936.5	50.89 PK	74	-23.11	-55.24	-50.57	4.92	-44.37
8	23936.5	44.87 AV	54	-9.13	-57.38	-59.53	4.92	-50.39
9	38624.09	46.37 PK	74	-27.63	-55.01	-59.99	4.92	-48.89
10	38624.09	35.18 AV	54	-18.82	-66.94	-69.43	4.92	-60.08

Note: Margin value = Emission Level - Limit value

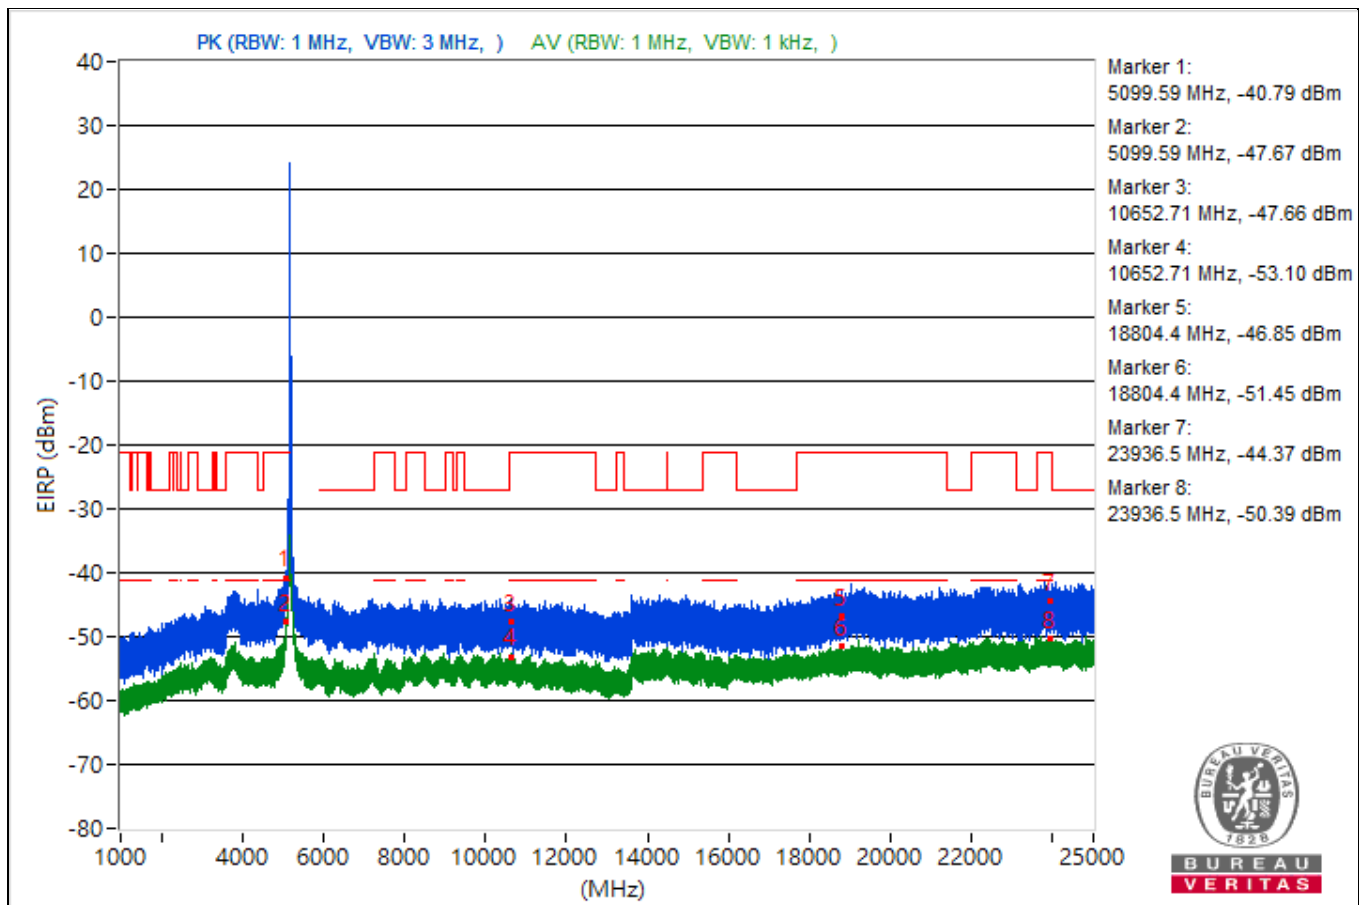


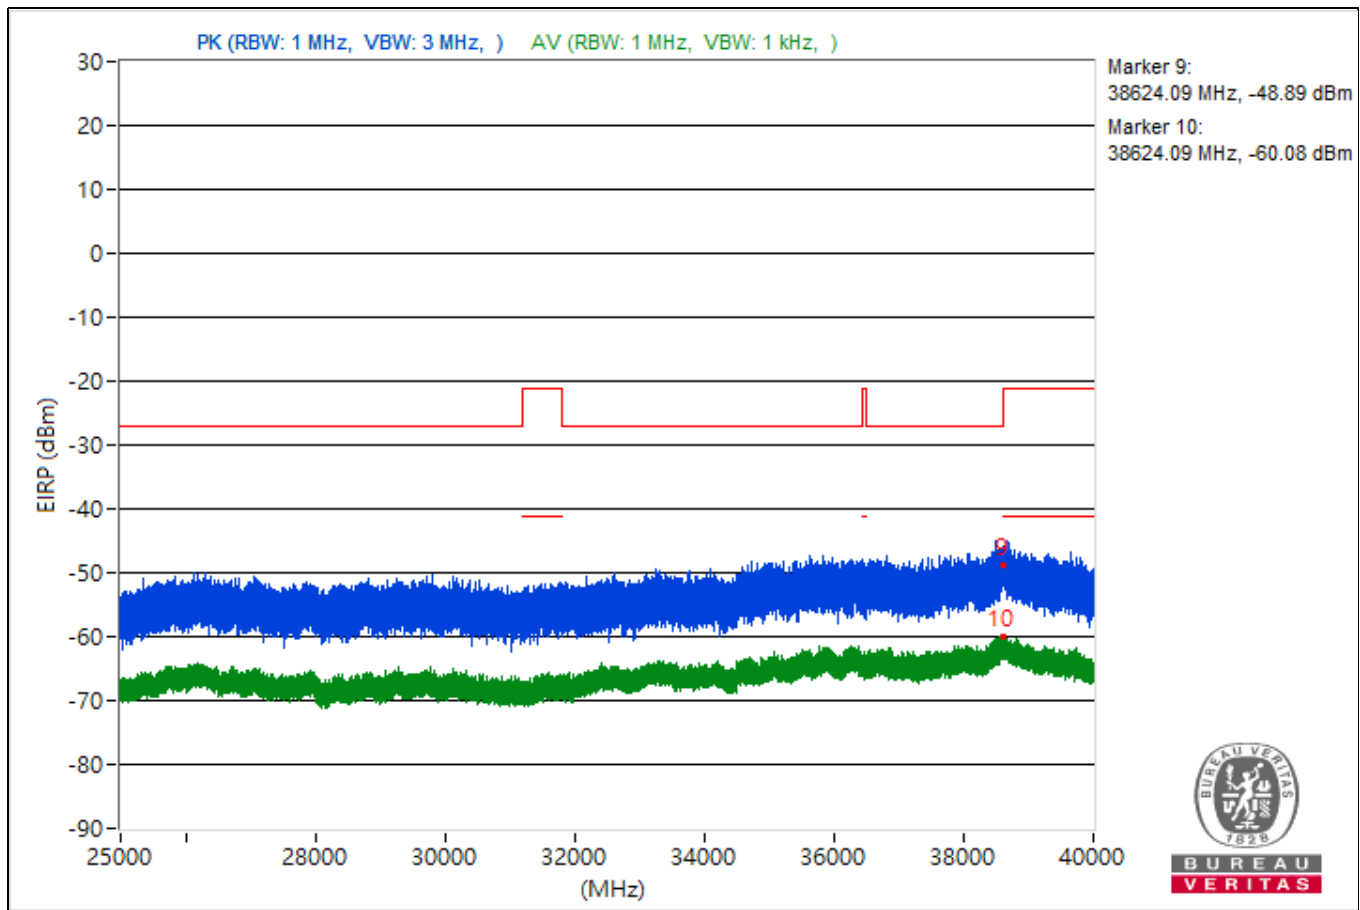


RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5093.37	52.32 PK	74	-21.68	-50.5	-51.27	4.92	-42.94
2	5093.37	47.59 AV	54	-6.41	-54.8	-56.58	4.92	-47.67
3	8419.02	46.35 PK	74	-27.65	-56.29	-57.48	4.92	-48.91
4	8419.02	42.11 AV	54	-11.89	-63.75	-59.44	4.92	-53.15
5	18909.2	48.71 PK	74	-25.29	-52.9	-56.98	4.92	-46.55
6	18909.2	44.04 AV	54	-9.96	-60.08	-58.38	4.92	-51.22
7	23715	48.63 PK	74	-25.37	-53.47	-56.04	4.92	-46.63
8	23715	44.59 AV	54	-9.41	-60.53	-57.26	4.92	-50.67
9	38610.58	45.21 PK	74	-28.79	-57.4	-58.66	4.92	-50.05
10	38610.58	34.85 AV	54	-19.15	-66.72	-70.96	4.92	-60.41

Note: Margin value = Emission Level - Limit value

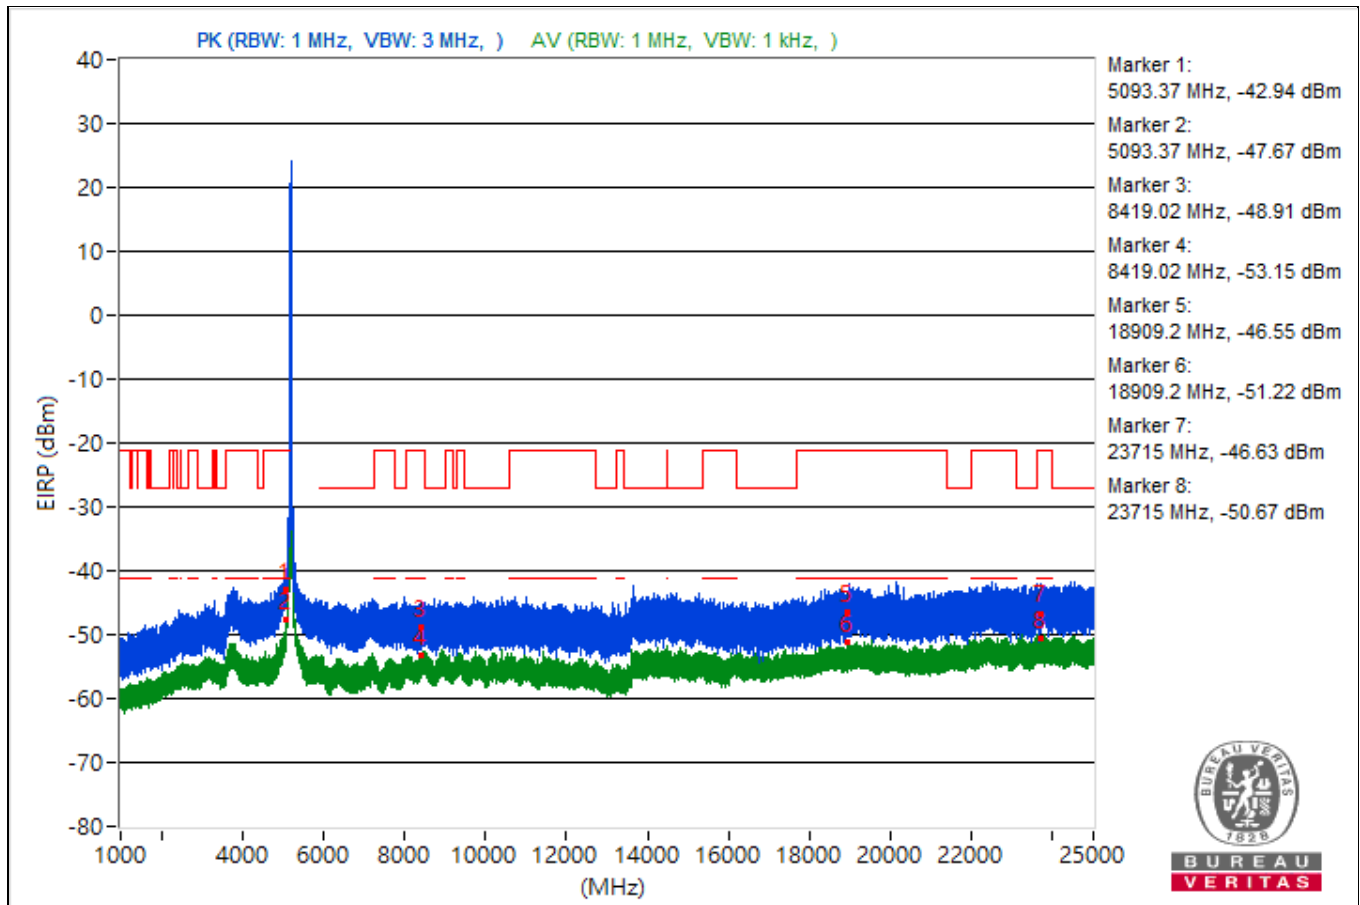


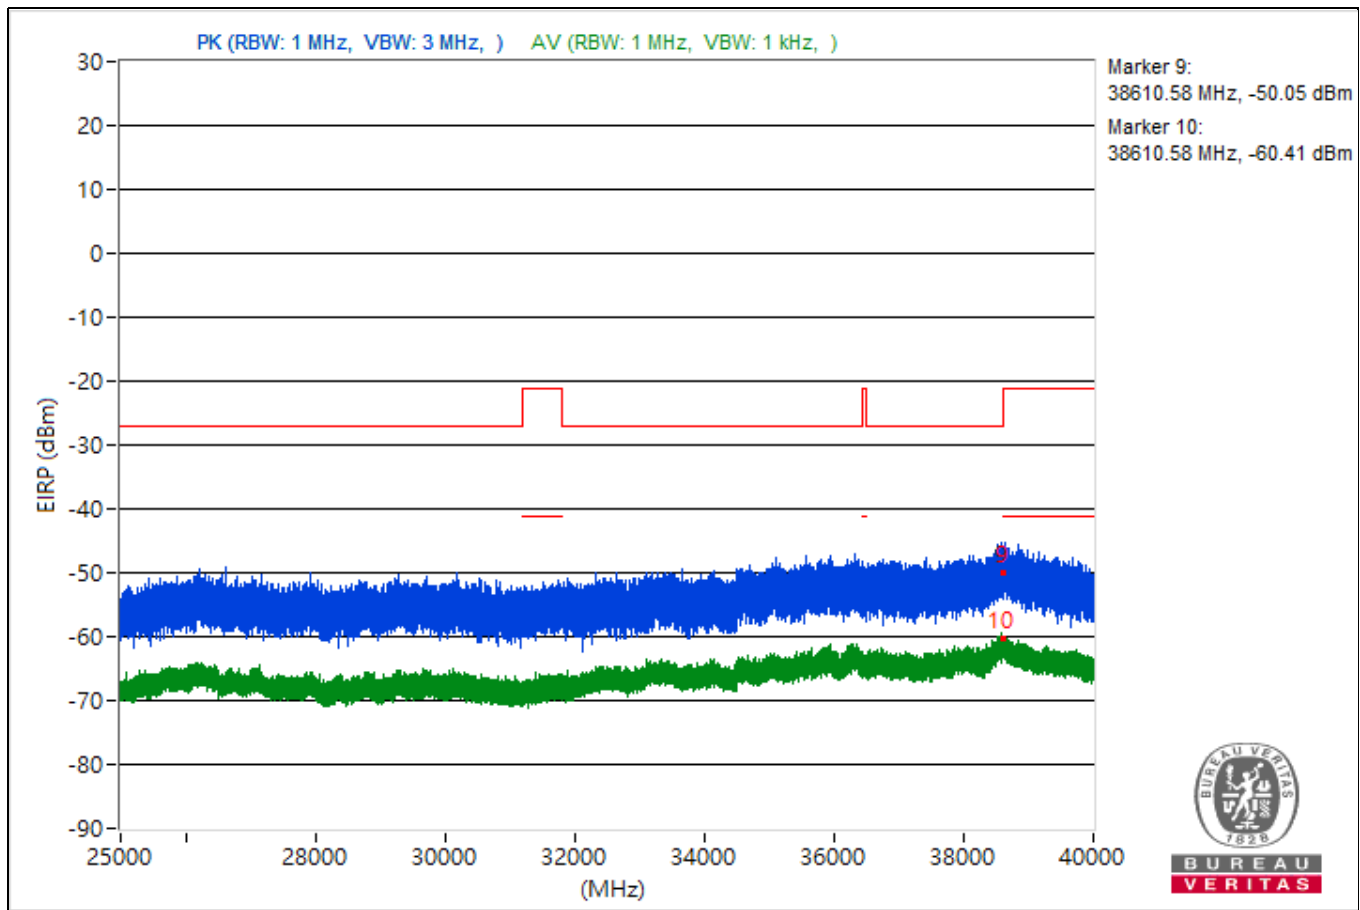


RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.87	53.2 PK	74	-20.8	-48.71	-51.81	4.92	-42.06
2	5096.87	46.06 AV	54	-7.94	-56.22	-58.29	4.92	-49.2
3	8495.29	48.26 PK	74	-25.74	-55.95	-54.11	4.92	-47
4	8495.29	42.11 AV	54	-11.89	-59.98	-62.54	4.92	-53.15
5	18788	51.36 PK	74	-22.64	-53.9	-50.44	4.92	-43.9
6	18788	43.58 AV	54	-10.42	-58.48	-61.14	4.92	-51.68
7	23883.7	49.17 PK	74	-24.83	-52.92	-55.5	4.92	-46.09
8	23883.7	44.6 AV	54	-9.4	-57.49	-60.07	4.92	-50.66
9	38634.76	46.65 PK	74	-27.35	-54.88	-59.26	4.92	-48.61
10	38634.76	35.01 AV	54	-18.99	-69.86	-66.97	4.92	-60.25

Note: Margin value = Emission Level - Limit value

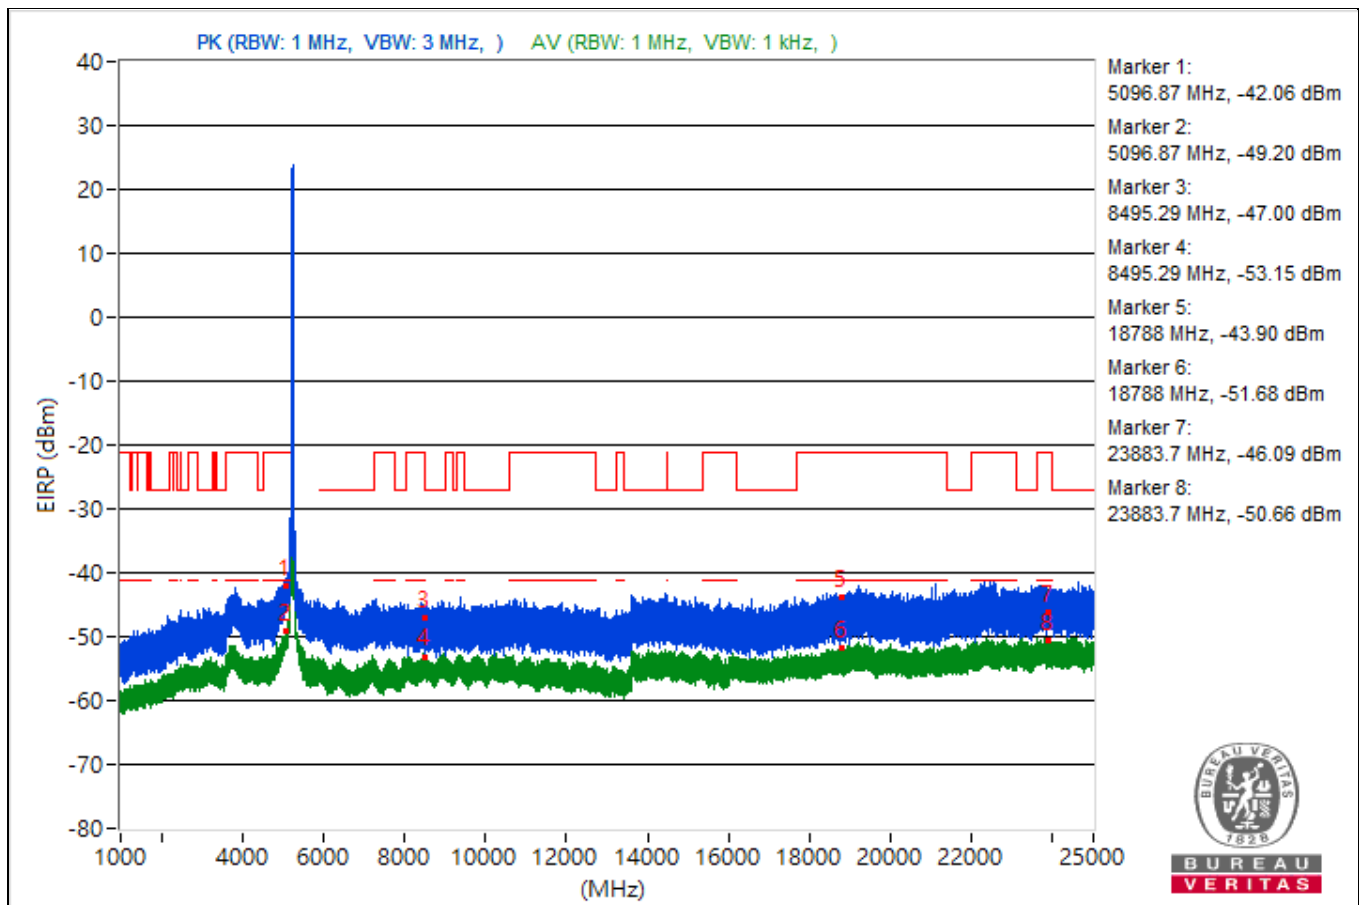


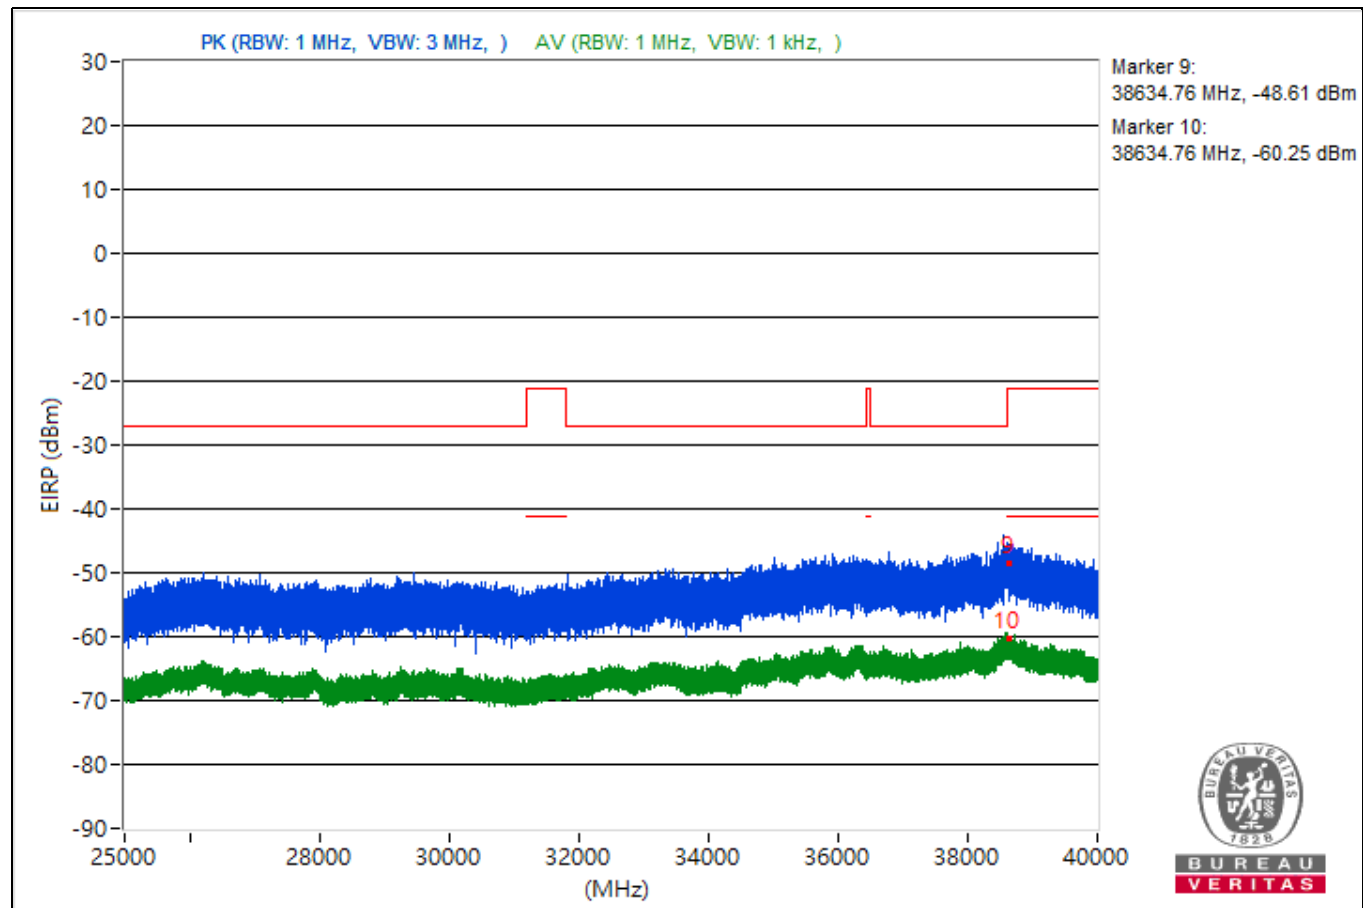


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5086.13	52.16 PK	74	-21.84	-50.64	-51.46	4.92	-43.1
2	5086.13	45.95 AV	54	-8.05	-57.71	-56.82	4.92	-49.31
3	9354.67	45.77 PK	74	-28.23	-59.57	-55.99	4.92	-49.49
4	9354.67	41.89 AV	54	-12.11	-60	-63.18	4.92	-53.37
5	18629.5	48.75 PK	74	-25.25	-55.15	-53.82	4.92	-46.51
6	18629.5	43.67 AV	54	-10.33	-58.62	-60.64	4.92	-51.59
7	22426.2	50.7 PK	74	-23.3	-53.54	-51.64	4.92	-44.56
8	22426.2	45.54 AV	54	-8.46	-58.7	-56.81	4.92	-49.72
9	38660.44	48.94 PK	74	-25.06	-54.82	-53.74	4.92	-46.32
10	38660.44	35.33 AV	54	-18.67	-66.49	-69.87	4.92	-59.93

Note: Margin value = Emission Level - Limit value

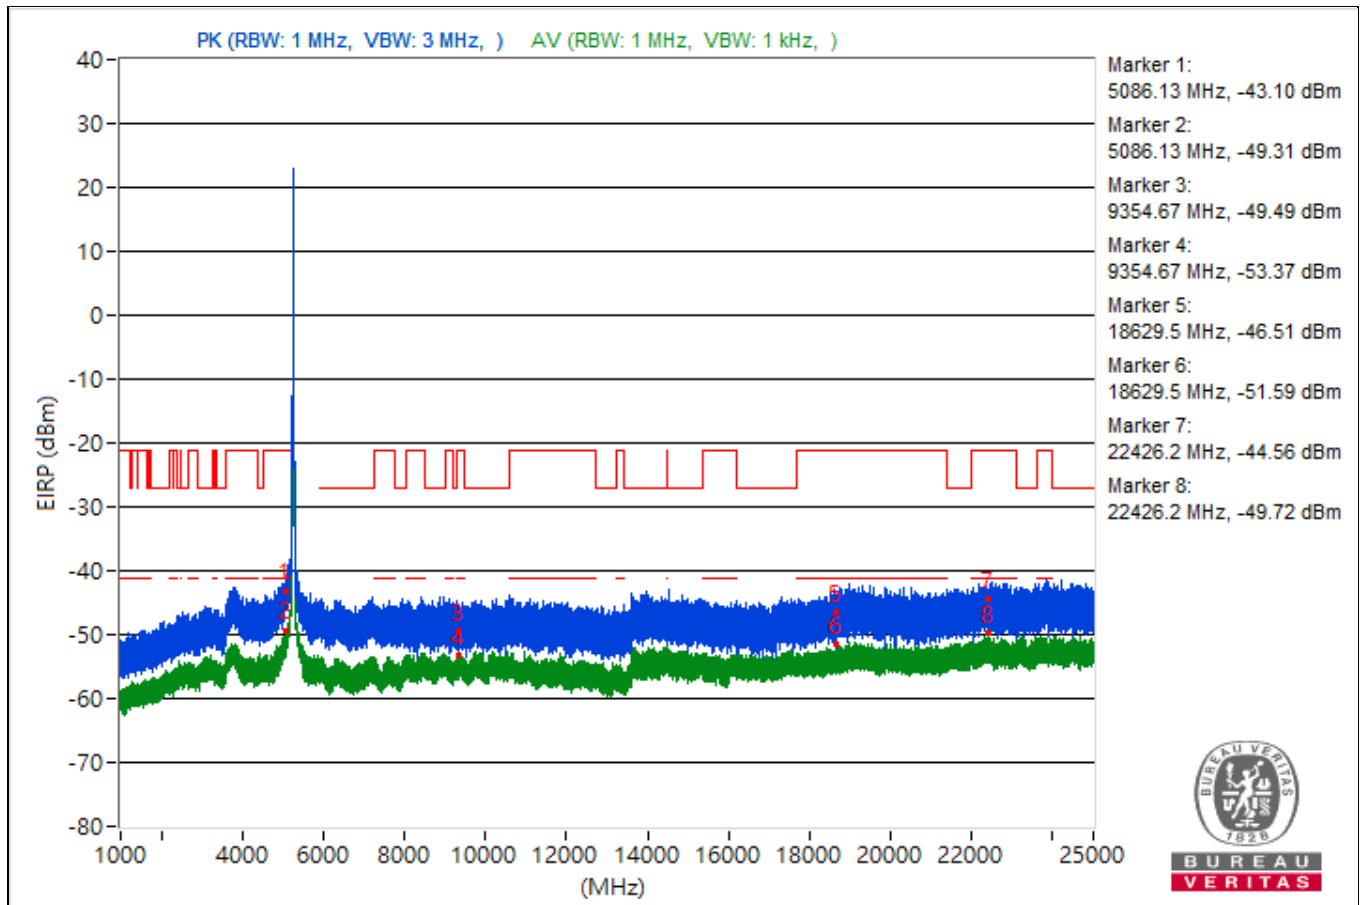


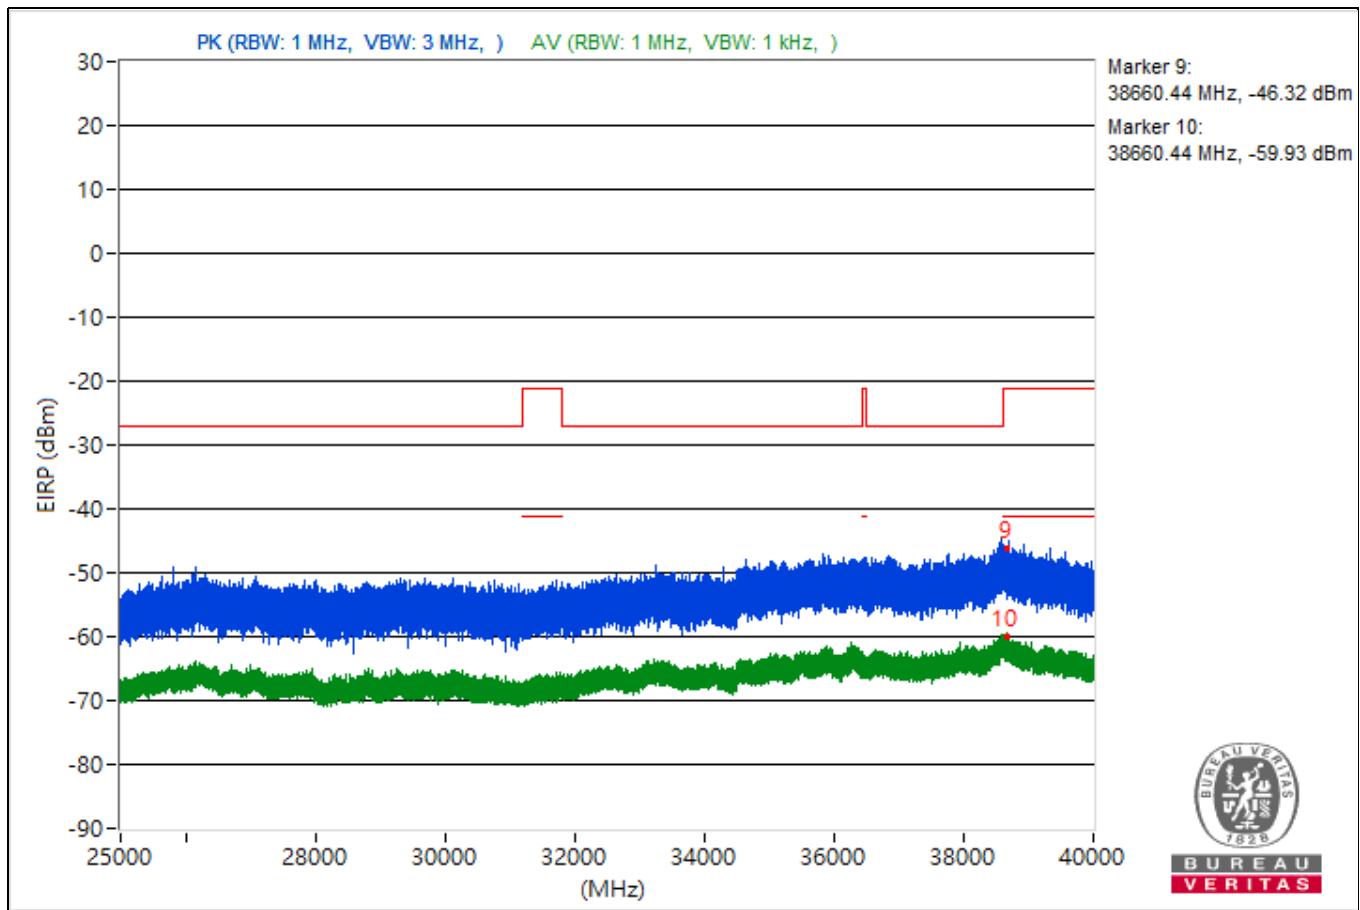


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5081.7	50.07 PK	74	-23.93	-53.51	-52.75	4.92	-45.19
2	5081.7	45.58 AV	54	-8.42	-58.22	-57.06	4.92	-49.68
3	10600.8	48.55 PK	74	-25.45	-55.04	-54.28	4.92	-46.71
4	10600.8	43.25 AV	54	-10.75	-59.33	-60.65	4.92	-52.01
5	18784.4	47.19 PK	74	-26.81	-55.36	-56.74	4.92	-48.07
6	18784.4	43.61 AV	54	-10.39	-58.39	-61.23	4.92	-51.65
7	23701.9	49.16 PK	74	-24.84	-52.87	-55.61	4.92	-46.1
8	23701.9	44.9 AV	54	-9.1	-57.23	-59.71	4.92	-50.36
9	38623.11	43.76 PK	74	-30.24	-59.13	-59.75	4.92	-51.5
10	38623.11	35.1 AV	54	-18.9	-66.68	-70.19	4.92	-60.16

Note: Margin value = Emission Level - Limit value

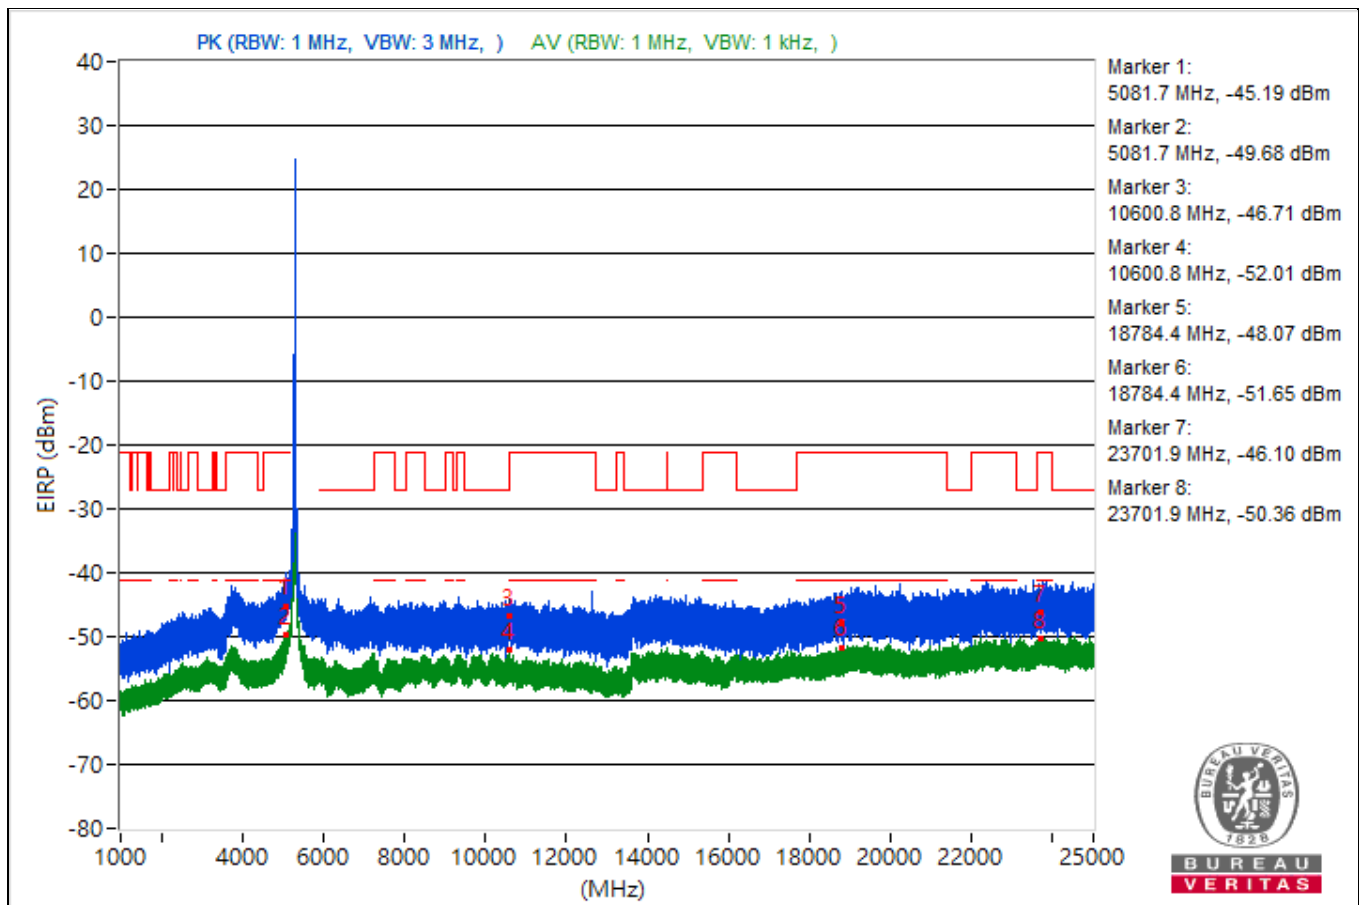


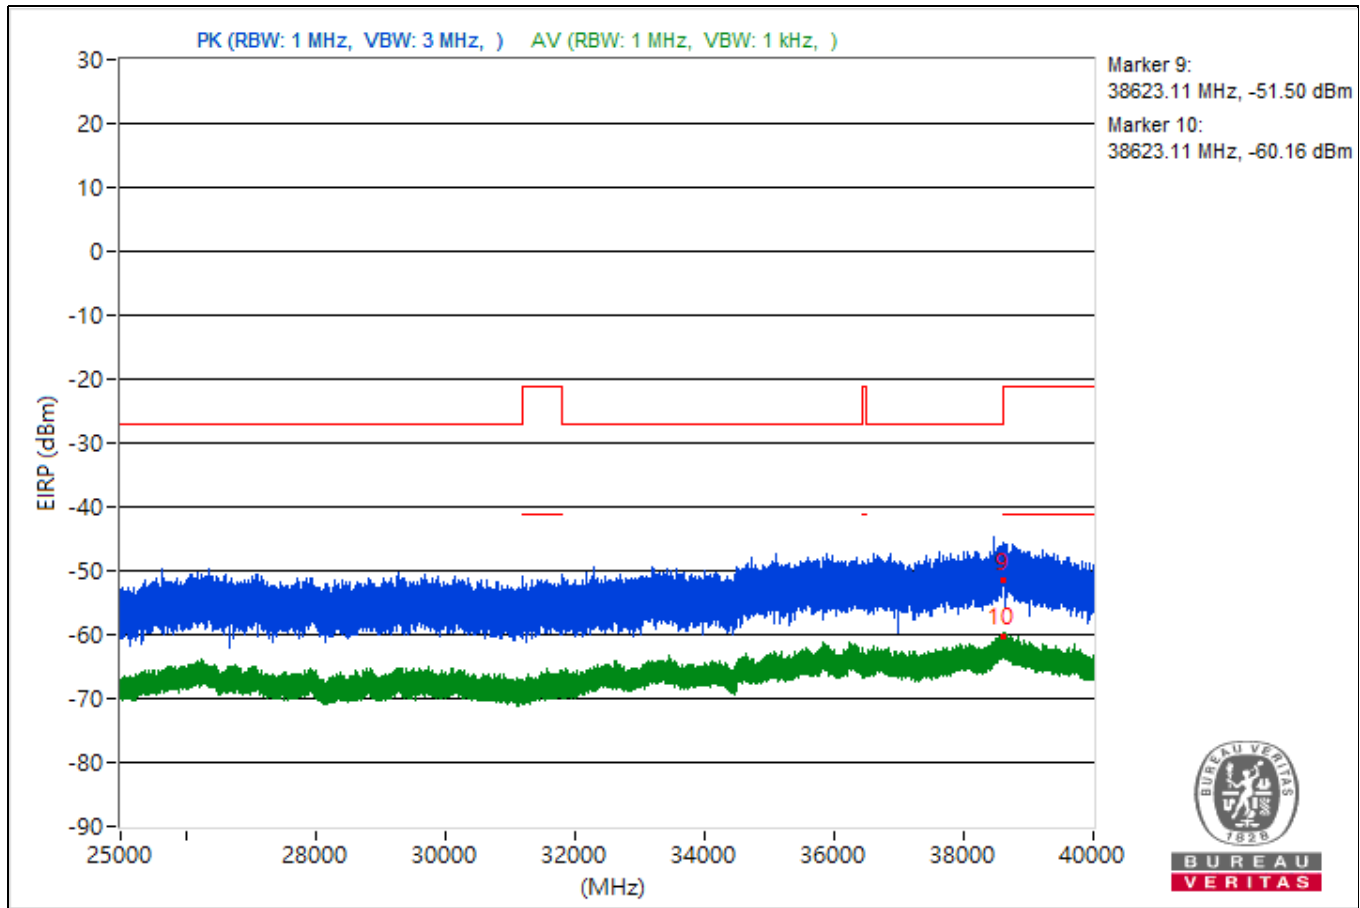


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3778.38	50.13 PK	74	-23.87	-52.28	-54.02	4.92	-45.13
2	3778.38	44.48 AV	54	-9.52	-60.34	-57.53	4.92	-50.78
3	10633.33	46.92 PK	74	-27.08	-55.97	-56.59	4.92	-48.34
4	10633.33	42.59 AV	54	-11.41	-59.43	-62.2	4.92	-52.67
5	18974.2	48.54 PK	74	-25.46	-53.26	-56.71	4.92	-46.72
6	18974.2	43.16 AV	54	-10.84	-62.11	-58.63	4.92	-52.1
7	23863.3	49.44 PK	74	-24.56	-53.74	-53.77	4.92	-45.82
8	23863.3	44.69 AV	54	-9.31	-60.5	-57.14	4.92	-50.57
9	38628.44	46.51 PK	74	-27.49	-57.45	-56.02	4.92	-48.75
10	38628.44	35.65 AV	54	-18.35	-66.47	-68.97	4.92	-59.61

Note: Margin value = Emission Level - Limit value

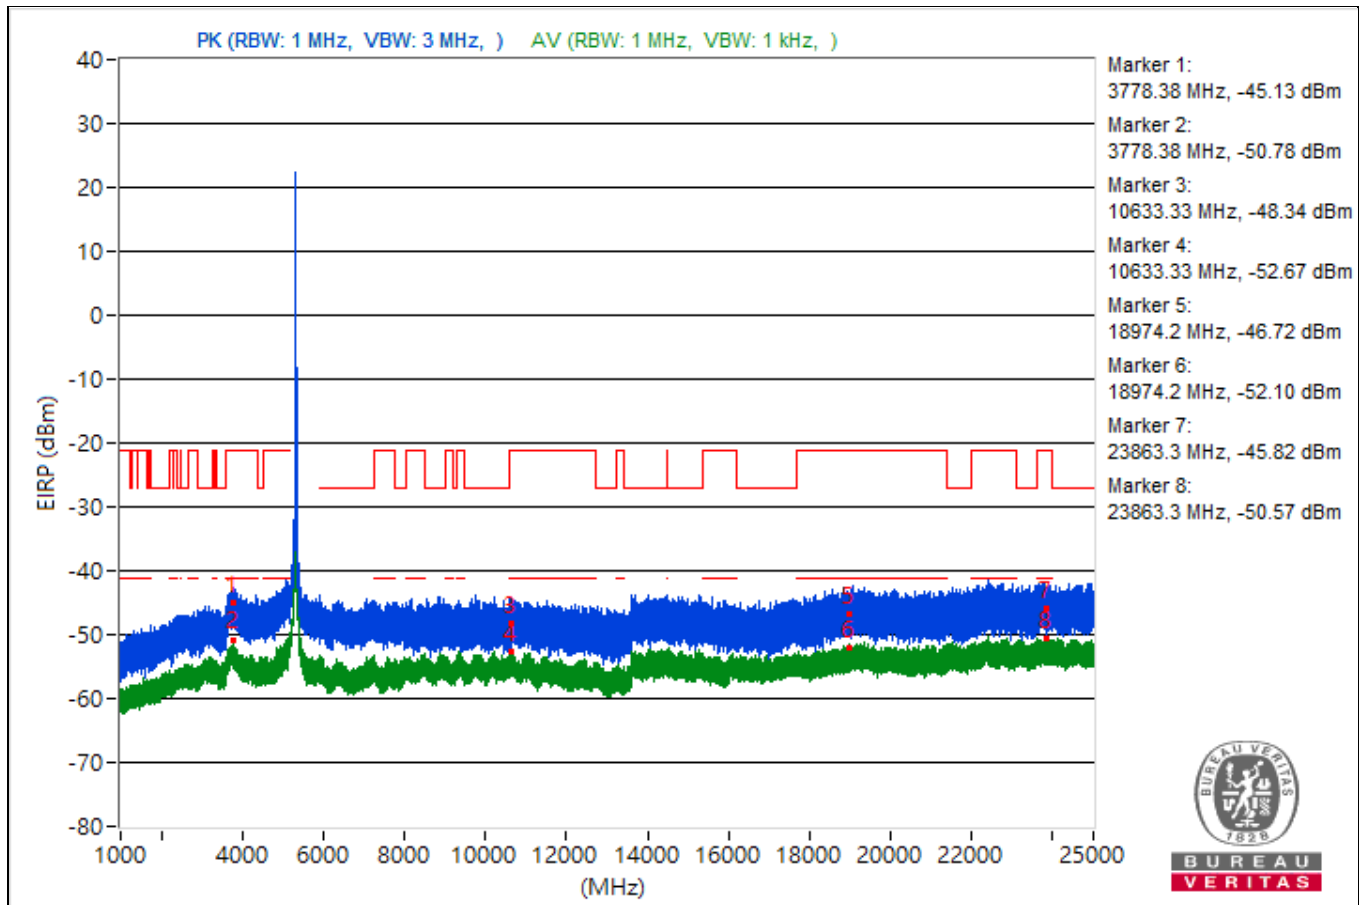


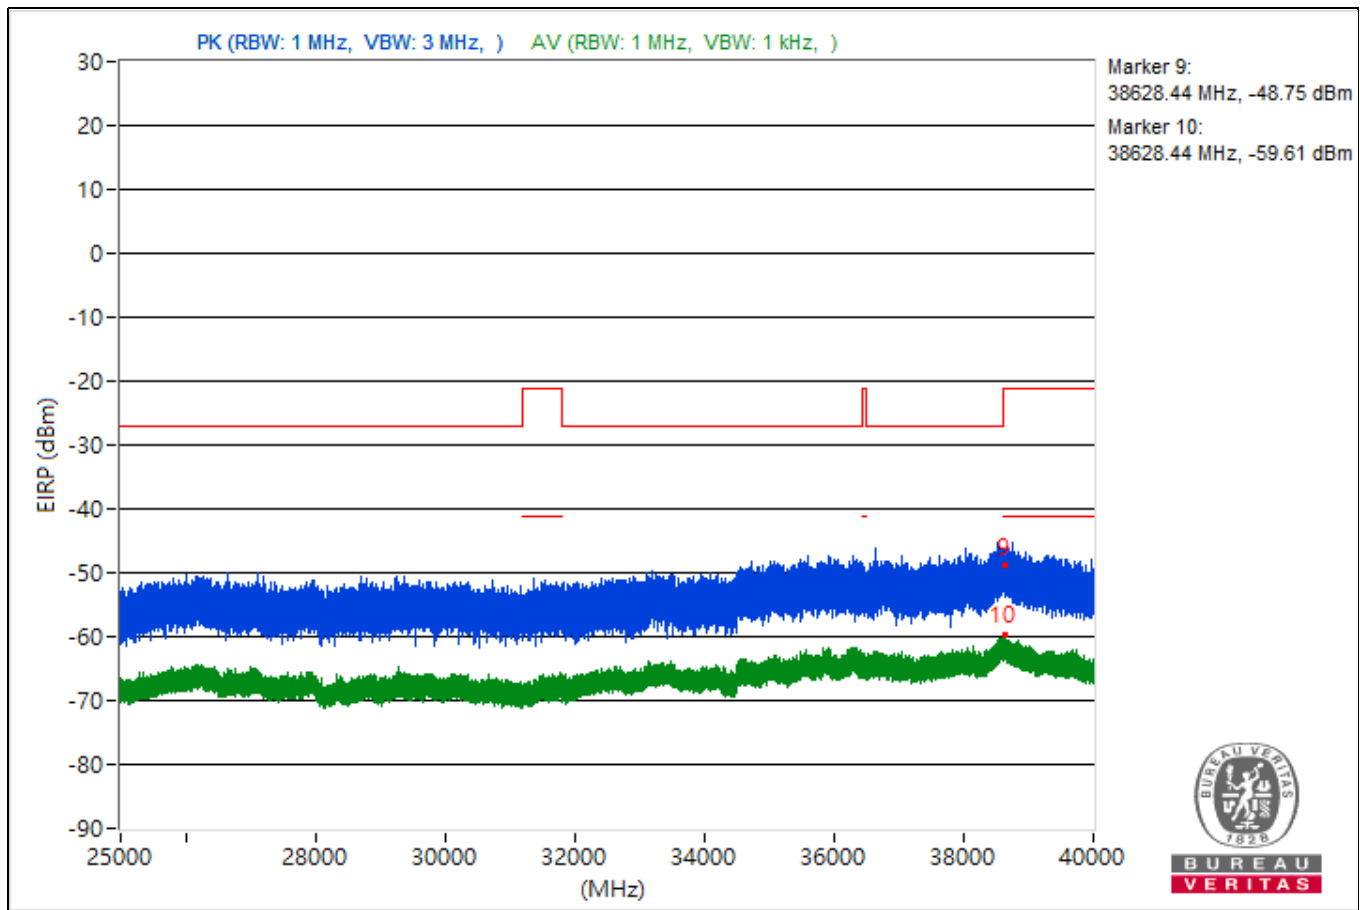


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.82	49.84 PK	74	-24.16	-53.81	-52.94	4.92	-45.42
2	3825.82	43.16 AV	54	-10.84	-61.93	-58.71	4.92	-52.1
3	8140.53	46.16 PK	74	-27.84	-56.52	-57.62	4.92	-49.1
4	8140.53	41.92 AV	54	-12.08	-60	-63.08	4.92	-53.34
5	18536.2	47.45 PK	74	-26.55	-54.1	-58.41	4.92	-47.81
6	18536.2	43.33 AV	54	-10.67	-59.11	-60.76	4.92	-51.93
7	23772	49.3 PK	74	-24.7	-53.75	-54.03	4.92	-45.96
8	23772	44.01 AV	54	-9.99	-61.77	-57.57	4.92	-51.25
9	38625.07	45.65 PK	74	-28.35	-57.39	-57.7	4.92	-49.61
10	38625.07	35.54 AV	54	-18.46	-66.61	-69.01	4.92	-59.72

Note: Margin value = Emission Level - Limit value

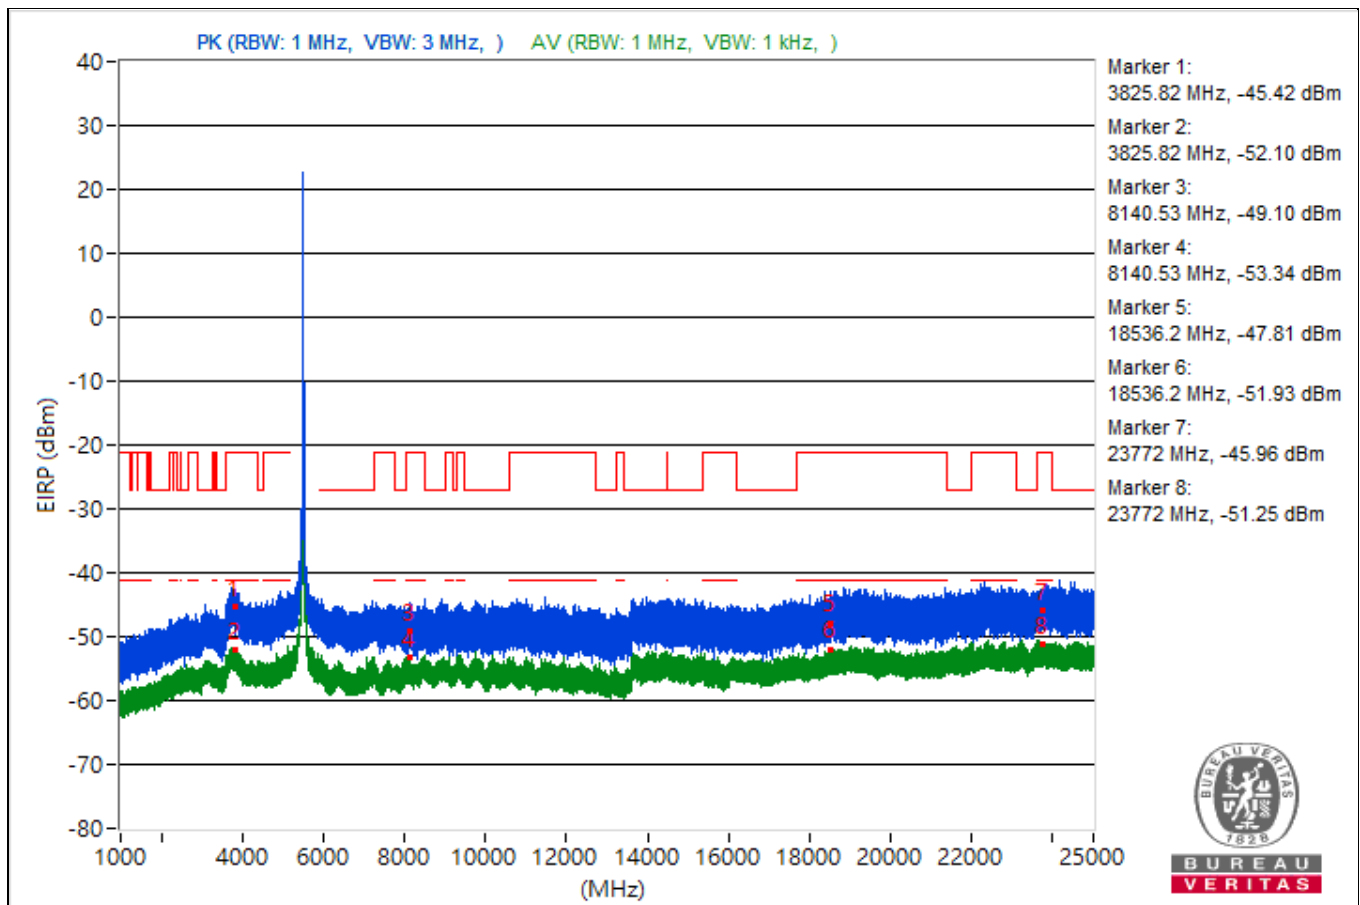


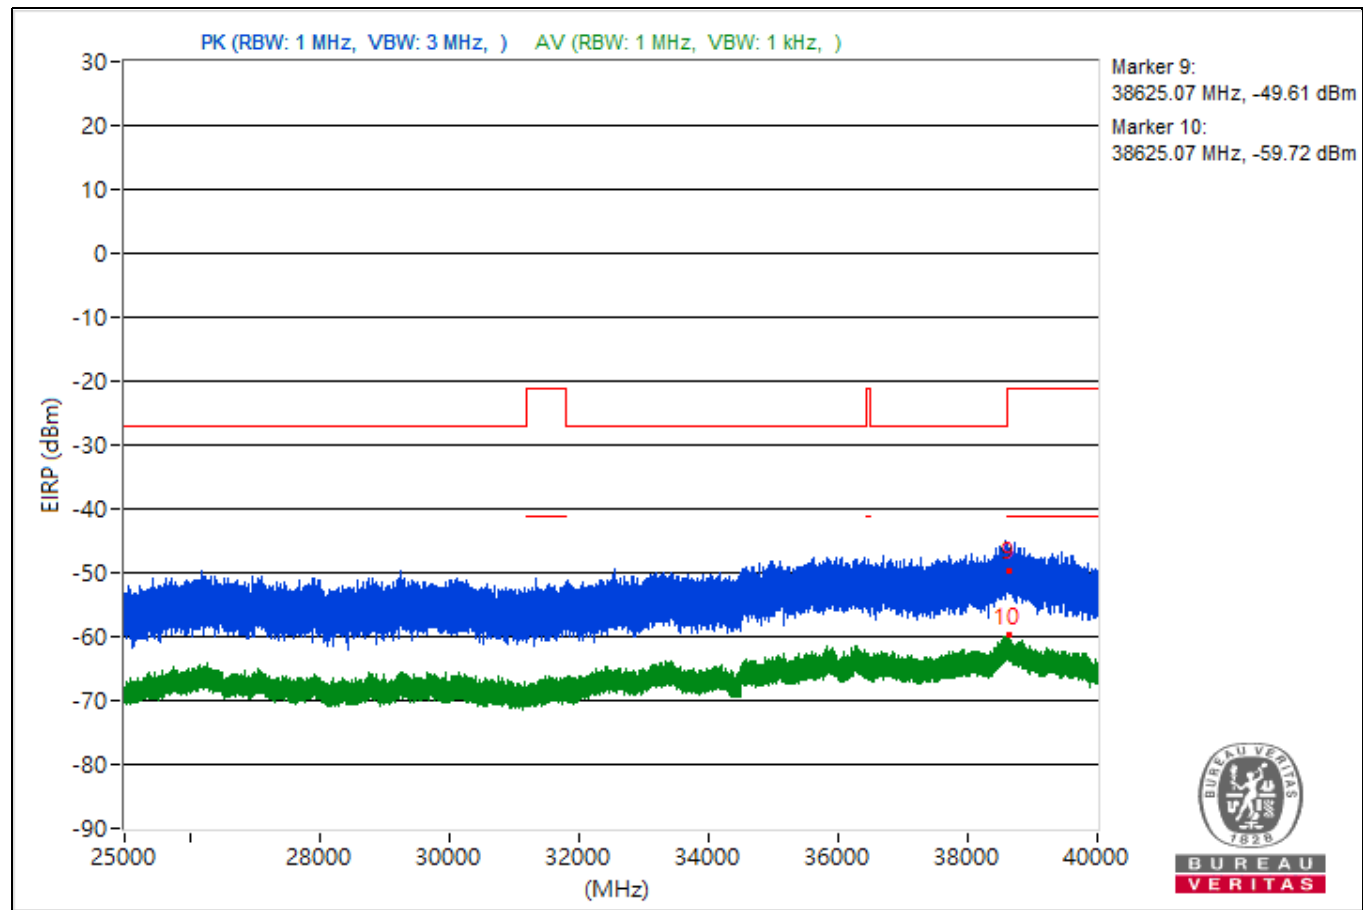


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3711.18	49.63 PK	74	-24.37	-53.9	-53.25	4.92	-45.63
2	3711.18	43.39 AV	54	-10.61	-61.53	-58.57	4.92	-51.87
3	10981.6	47.67 PK	74	-26.33	-55.51	-55.53	4.92	-47.59
4	10981.6	42.5 AV	54	-11.5	-59.63	-62.09	4.92	-52.76
5	18977.3	50.85 PK	74	-23.15	-51.22	-53.87	4.92	-44.41
6	18977.3	42.93 AV	54	-11.07	-58.86	-62.34	4.92	-52.33
7	22365.7	49.14 PK	74	-24.86	-52.96	-55.52	4.92	-46.12
8	22365.7	44.49 AV	54	-9.51	-57.35	-60.66	4.92	-50.77
9	38622.49	47.69 PK	74	-26.31	-55.16	-55.88	4.92	-47.57
10	38622.49	35.92 AV	54	-18.08	-67	-67.57	4.92	-59.34

Note: Margin value = Emission Level - Limit value

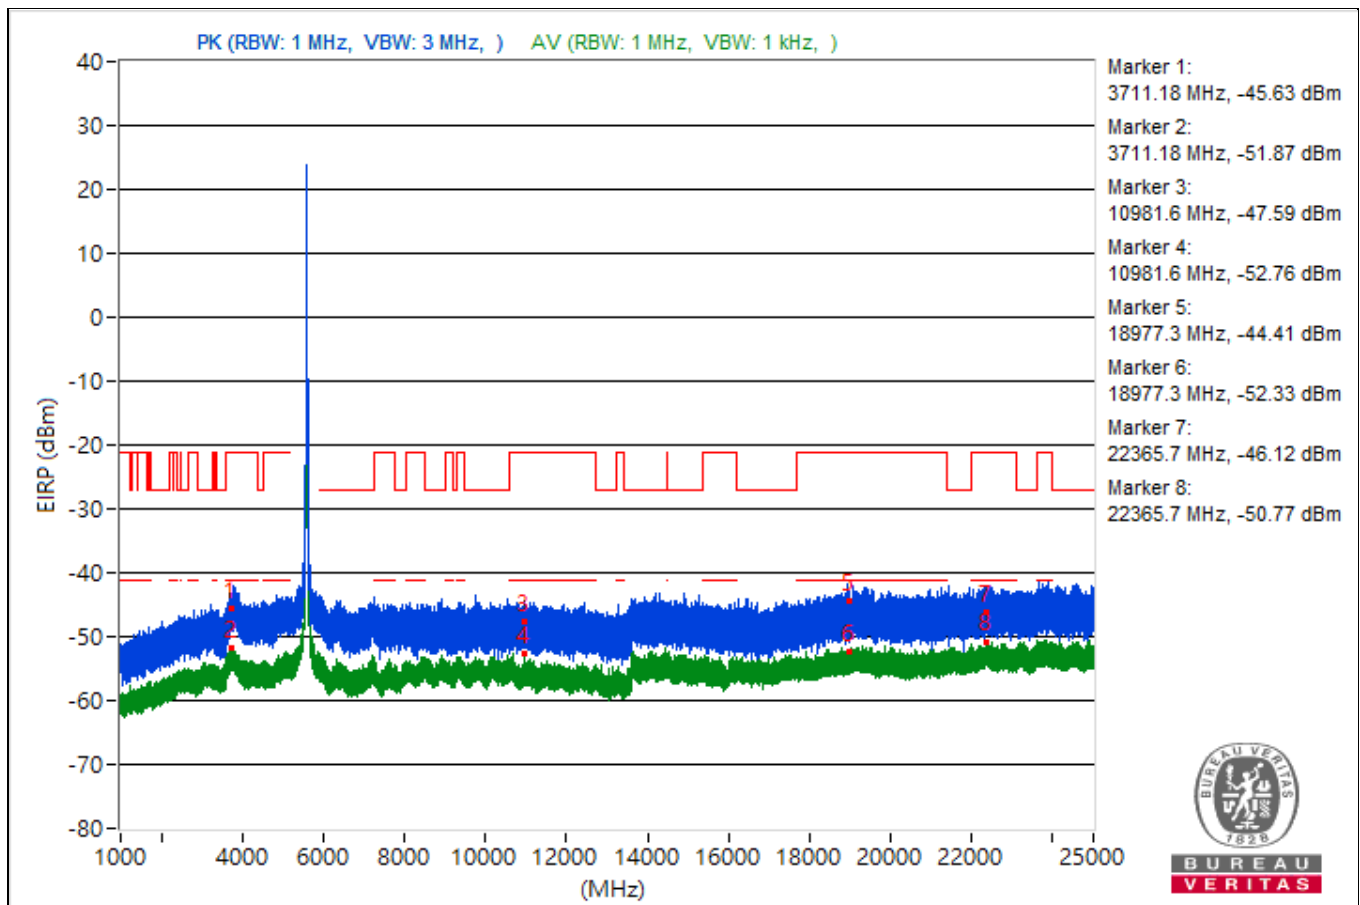


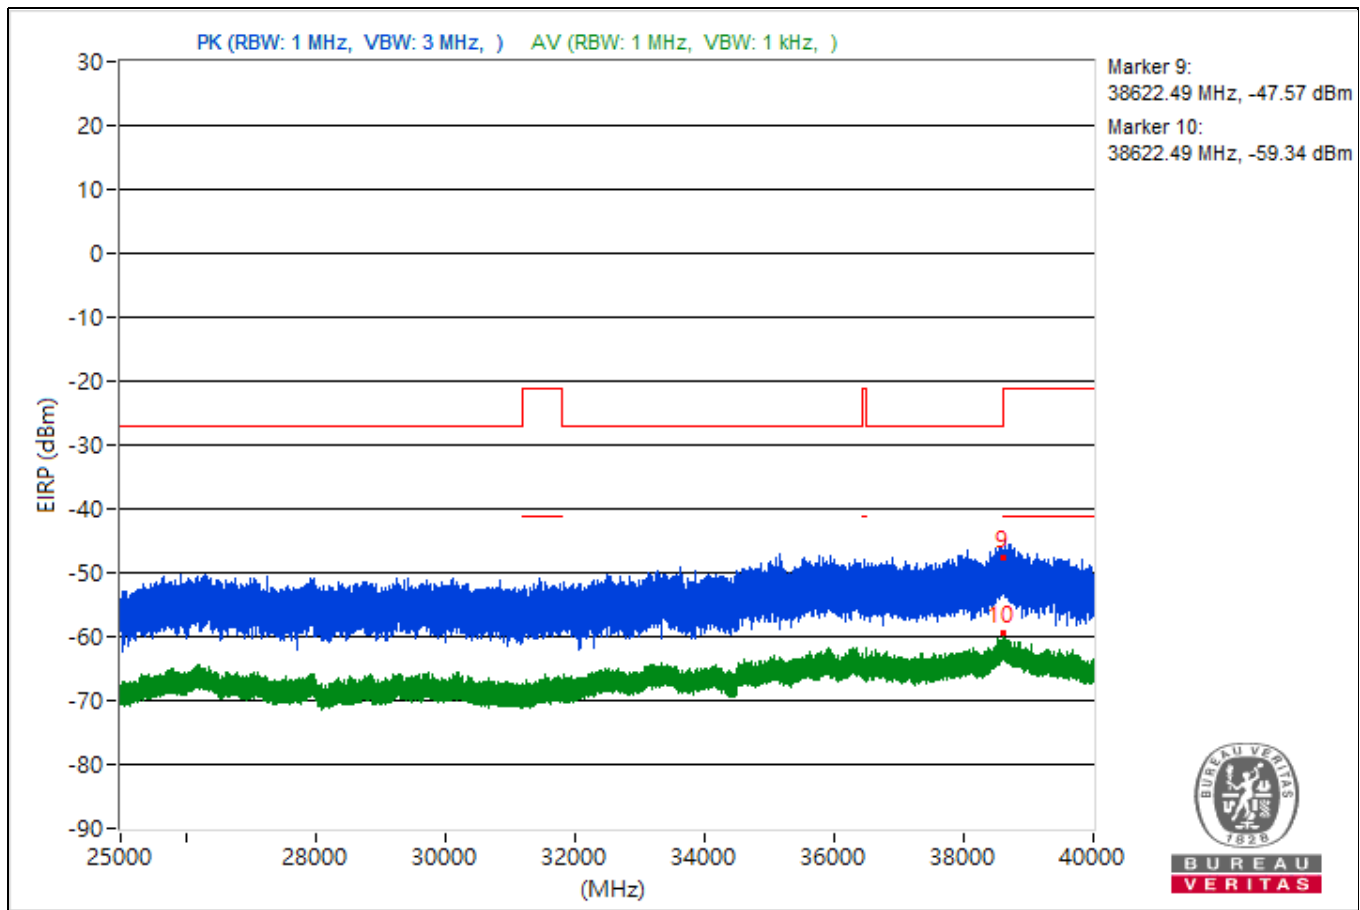


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3728.44	49.37 PK	74	-24.63	-54.45	-53.27	4.92	-45.89
2	3728.44	43.83 AV	54	-10.17	-60.16	-58.69	4.92	-51.43
3	8473.51	47.39 PK	74	-26.61	-54.85	-57.03	4.92	-47.87
4	8473.51	41.57 AV	54	-12.43	-63.74	-60.2	4.92	-53.69
5	18973.1	50.08 PK	74	-23.92	-53.53	-52.73	4.92	-45.18
6	18973.1	43.26 AV	54	-10.74	-58.71	-61.65	4.92	-52
7	22339.9	48.21 PK	74	-25.79	-55.77	-54.3	4.92	-47.05
8	22339.9	43.96 AV	54	-10.04	-57.6	-61.88	4.92	-51.3
9	38643.02	44.83 PK	74	-29.17	-58.24	-58.48	4.92	-50.43
10	38643.02	34.9 AV	54	-19.1	-69.96	-67.09	4.92	-60.36

Note: Margin value = Emission Level - Limit value

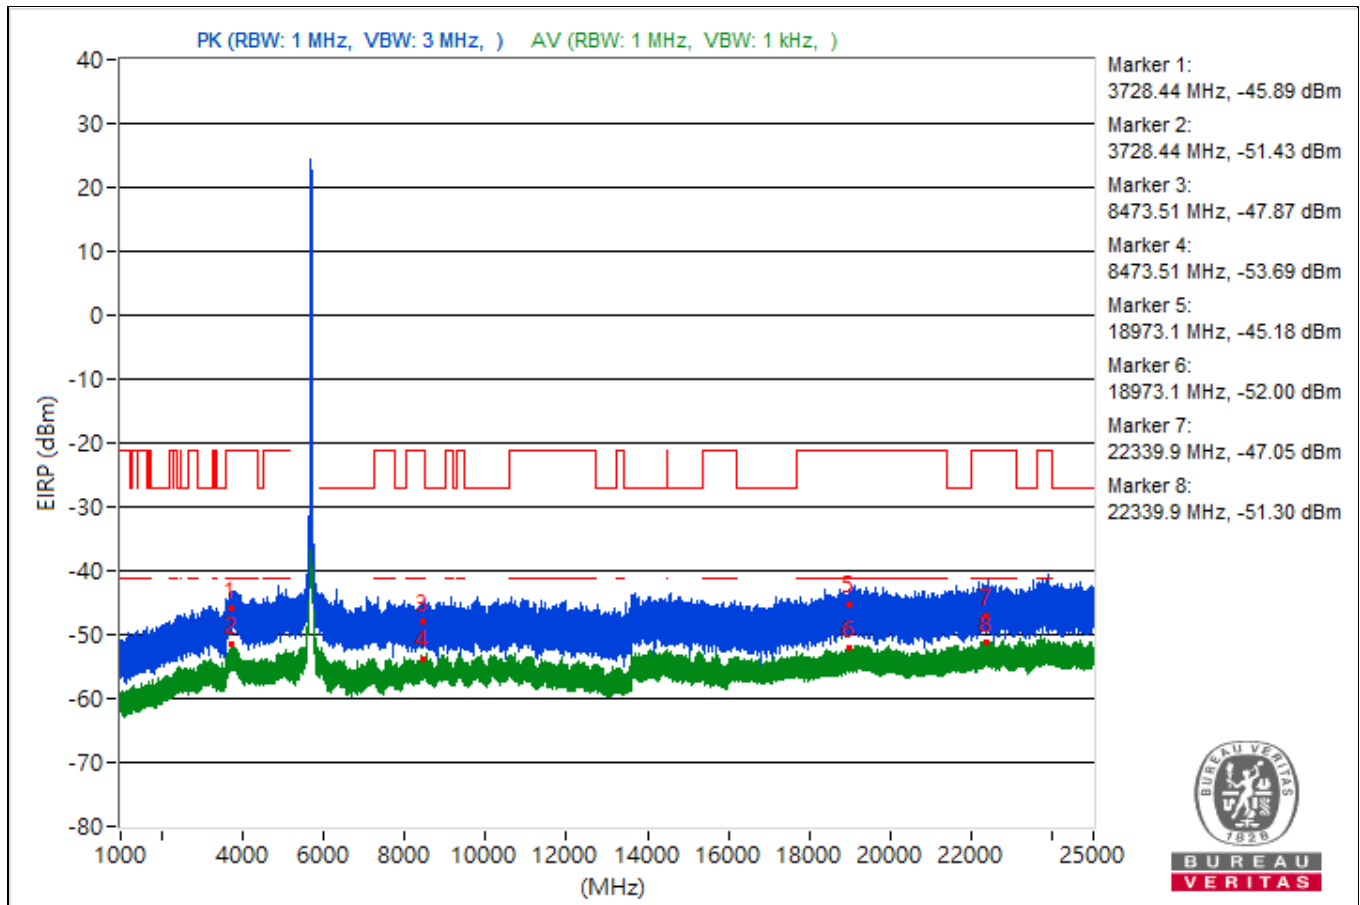


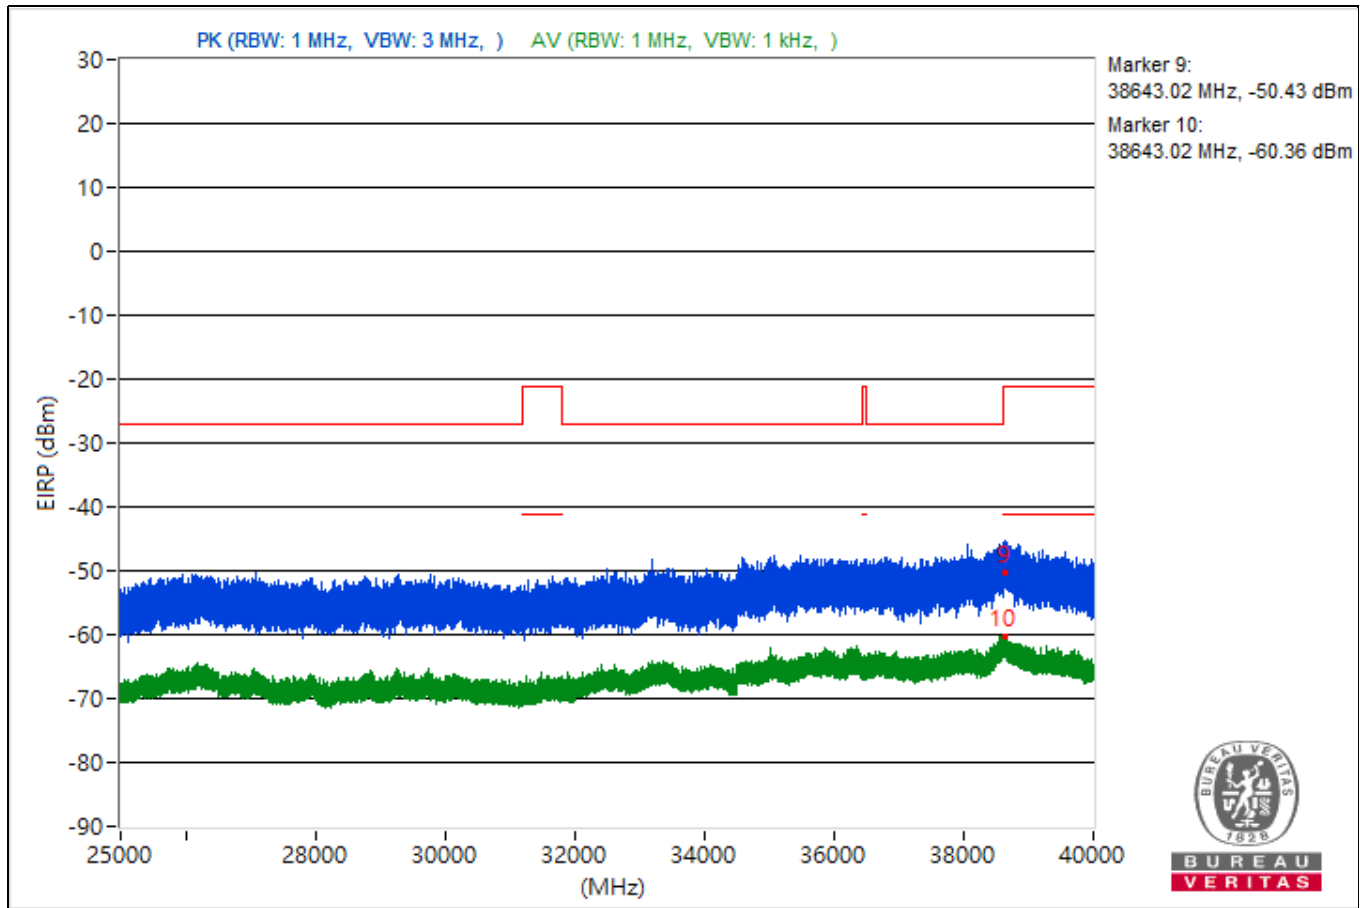


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.78	49.38 PK	74	-24.62	-53.03	-54.75	4.92	-45.88
2	3842.78	42.56 AV	54	-11.44	-62.88	-59.15	4.92	-52.7
3	7265.31	44.81 PK	74	-29.19	-58.95	-57.88	4.92	-50.45
4	7265.31	41.9 AV	54	-12.1	-62.69	-60.24	4.92	-53.36
5	18756	47.19 PK	74	-26.81	-55.86	-56.16	4.92	-48.07
6	18756	43.06 AV	54	-10.94	-62.01	-58.83	4.92	-52.2
7	23748.9	49.33 PK	74	-24.67	-54.31	-53.45	4.92	-45.93
8	23748.9	43.92 AV	54	-10.08	-57.5	-62.31	4.92	-51.34
9	38633.69	45.46 PK	74	-28.54	-57.68	-57.77	4.92	-49.8
10	38633.69	34.89 AV	54	-19.11	-70.9	-66.69	4.92	-60.37

Note: Margin value = Emission Level - Limit value

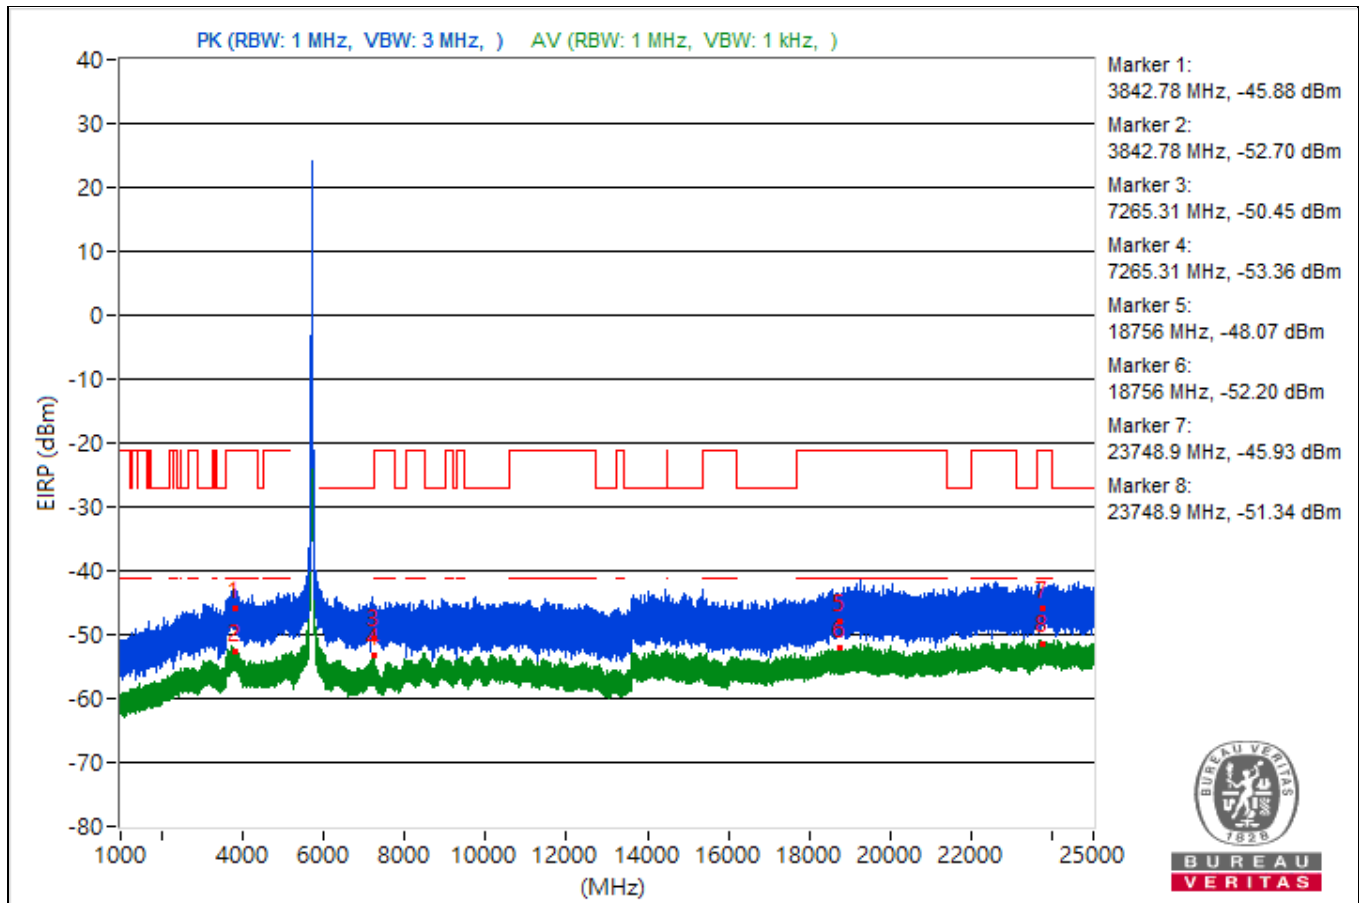


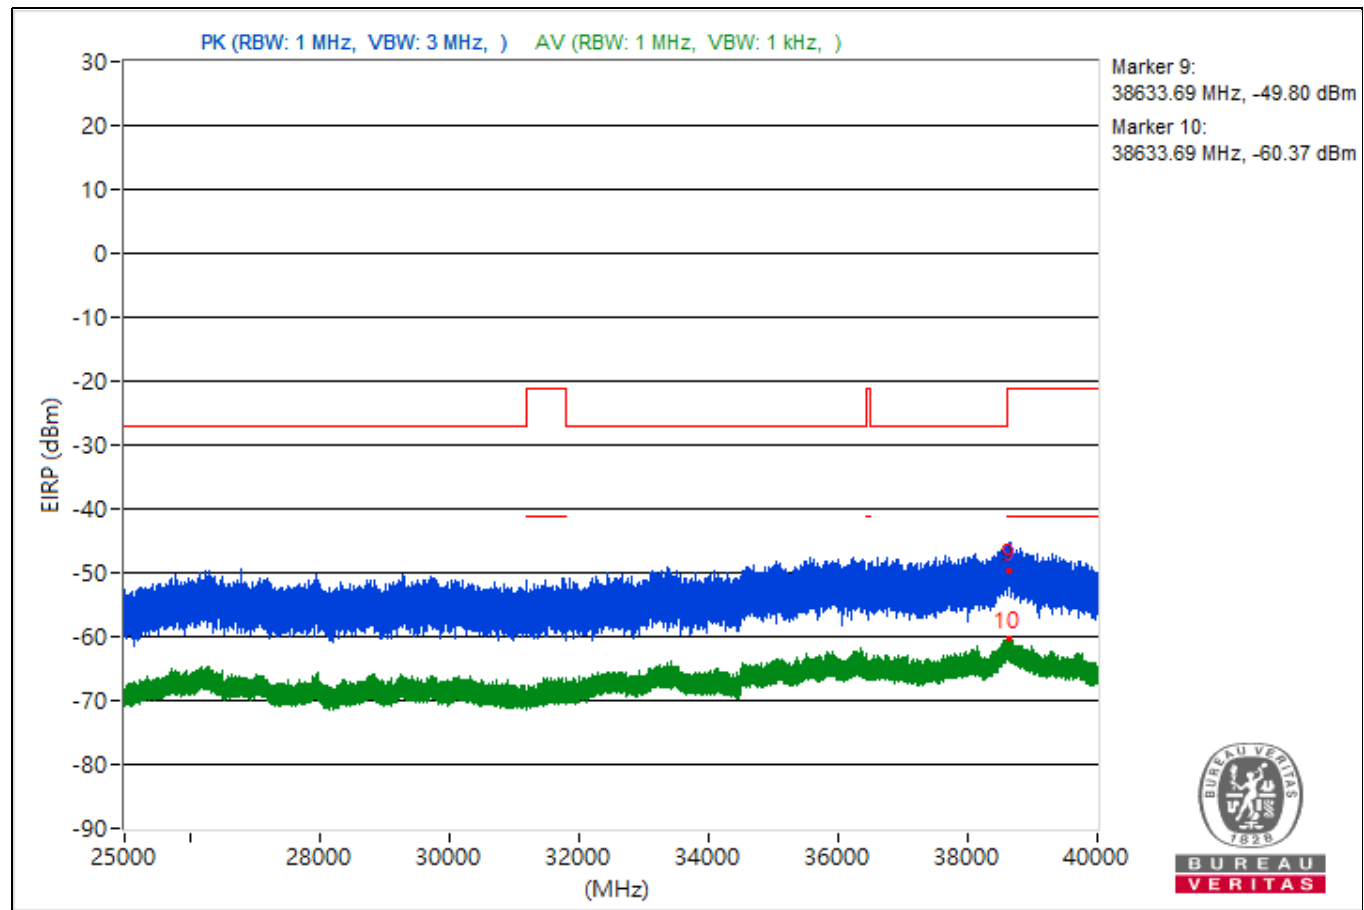


RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3762.98	48.92 PK	74	-25.08	-54.16	-54.38	4.92	-46.34
2	3762.98	43.41 AV	54	-10.59	-58.82	-61.01	4.92	-51.85
3	10629.07	47.52 PK	74	-26.48	-56.42	-55.03	4.92	-47.74
4	10629.07	41.66 AV	54	-12.34	-60	-63.92	4.92	-53.6
5	18869.2	47.2 PK	74	-26.8	-57.31	-54.98	4.92	-48.06
6	18869.2	42.82 AV	54	-11.18	-58.9	-62.61	4.92	-52.44
7	22462	48.41 PK	74	-25.59	-55.73	-54	4.92	-46.85
8	22462	44.34 AV	54	-9.66	-57.37	-61.09	4.92	-50.92
9	38661.87	46.18 PK	74	-27.82	-56.66	-57.4	4.92	-49.08
10	38661.87	34.91 AV	54	-19.09	-69.58	-67.28	4.92	-60.35

Note: Margin value = Emission Level - Limit value

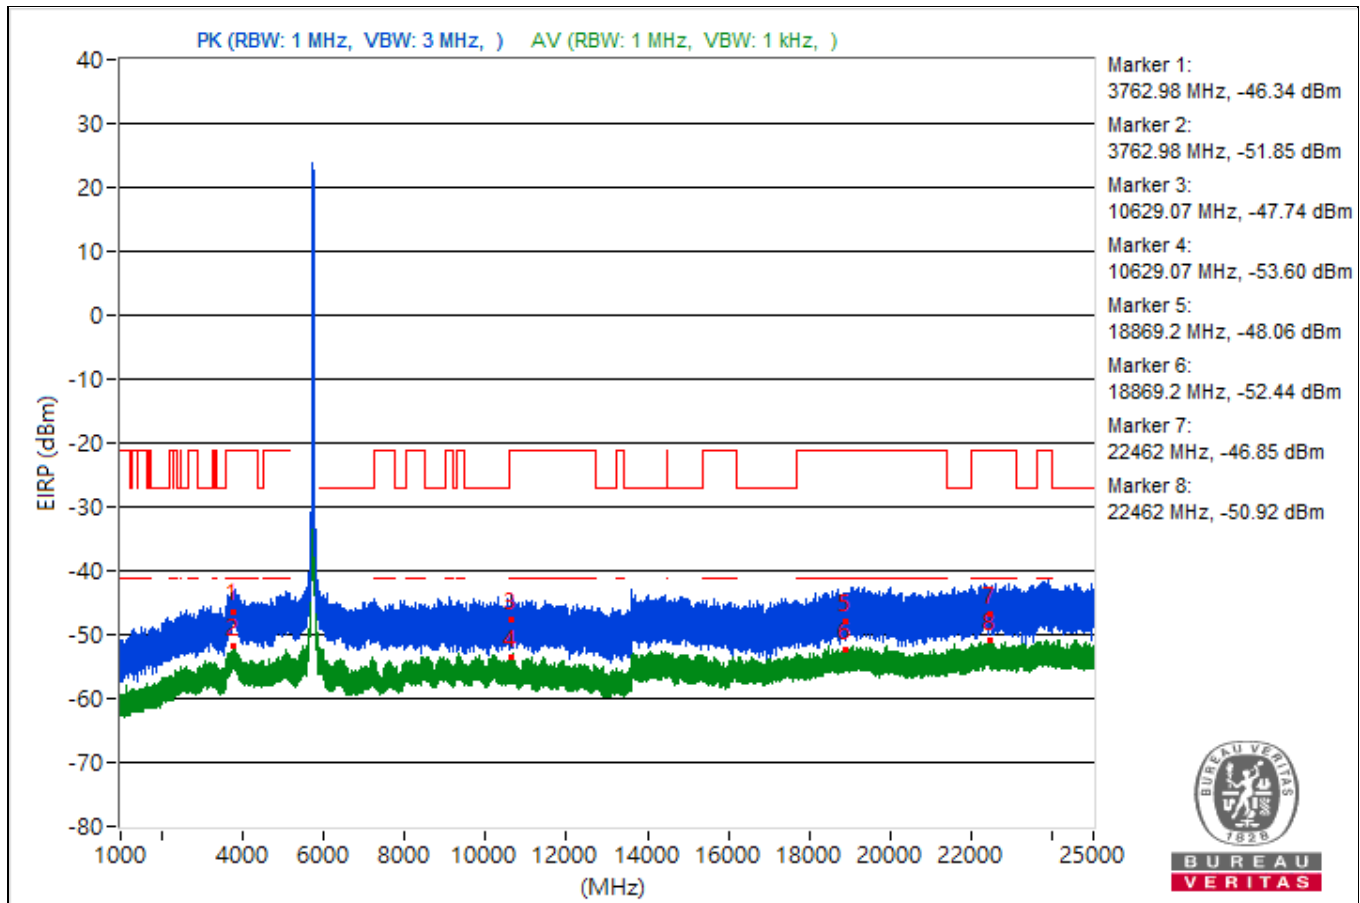


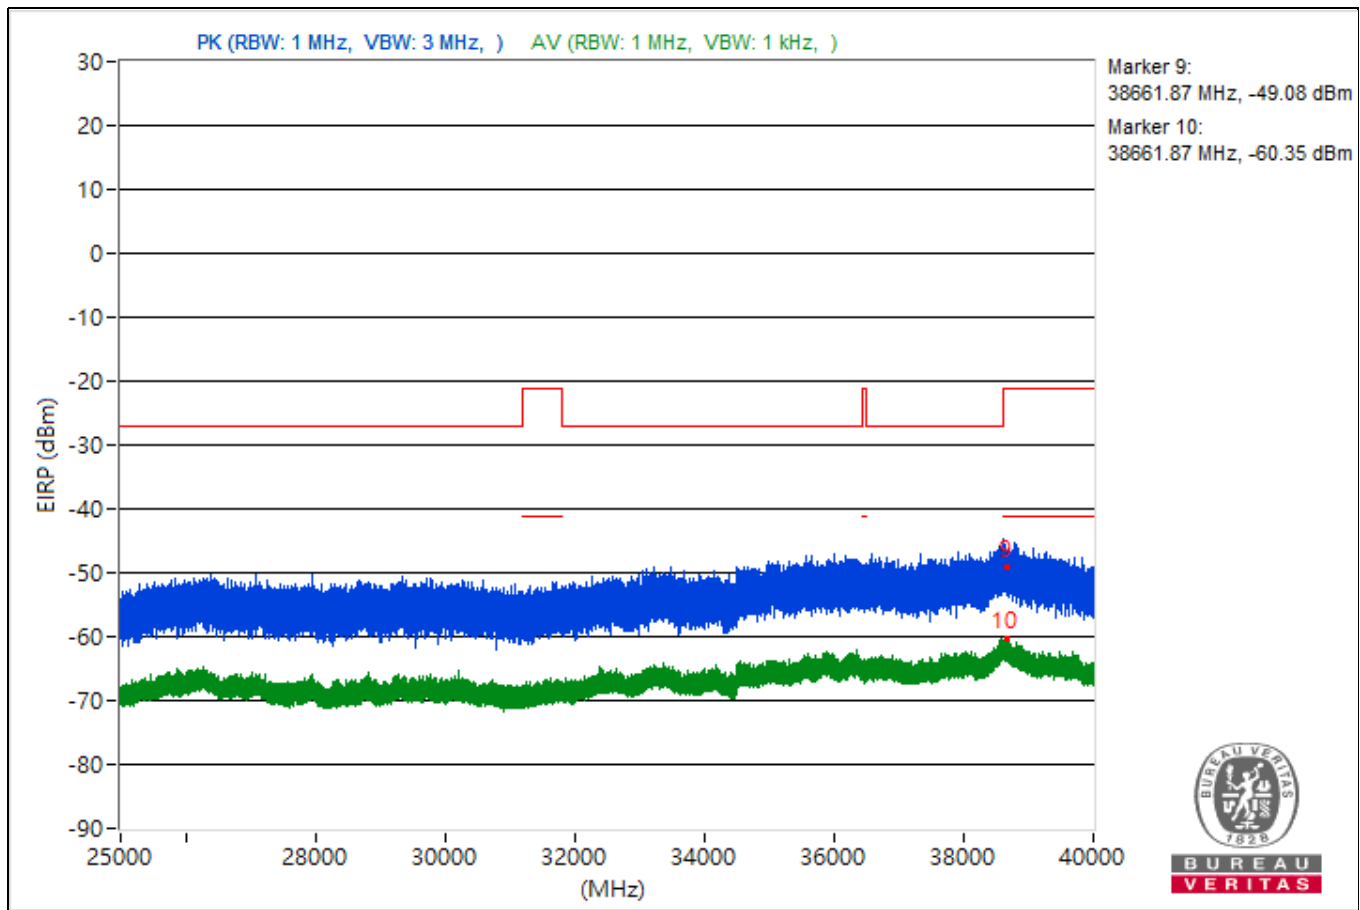


RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3729.07	47.69 PK	74	-26.31	-54.58	-56.68	4.92	-47.57
2	3729.07	42.92 AV	54	-11.08	-58.41	-63.6	4.92	-52.34
3	8493.96	46.17 PK	74	-27.83	-58.39	-55.97	4.92	-49.09
4	8493.96	42.09 AV	54	-11.91	-62.82	-59.86	4.92	-53.17
5	18929.6	46.81 PK	74	-27.19	-56.23	-56.54	4.92	-48.45
6	18929.6	42.75 AV	54	-11.25	-62.77	-58.93	4.92	-52.51
7	23965.6	50.08 PK	74	-23.92	-54.79	-51.91	4.92	-45.18
8	23965.6	44.39 AV	54	-9.61	-57.19	-61.39	4.92	-50.87
9	38639.02	49.4 PK	74	-24.6	-55.59	-52.52	4.92	-45.86
10	38639.02	35.08 AV	54	-18.92	-67.67	-68.6	4.92	-60.18

Note: Margin value = Emission Level - Limit value

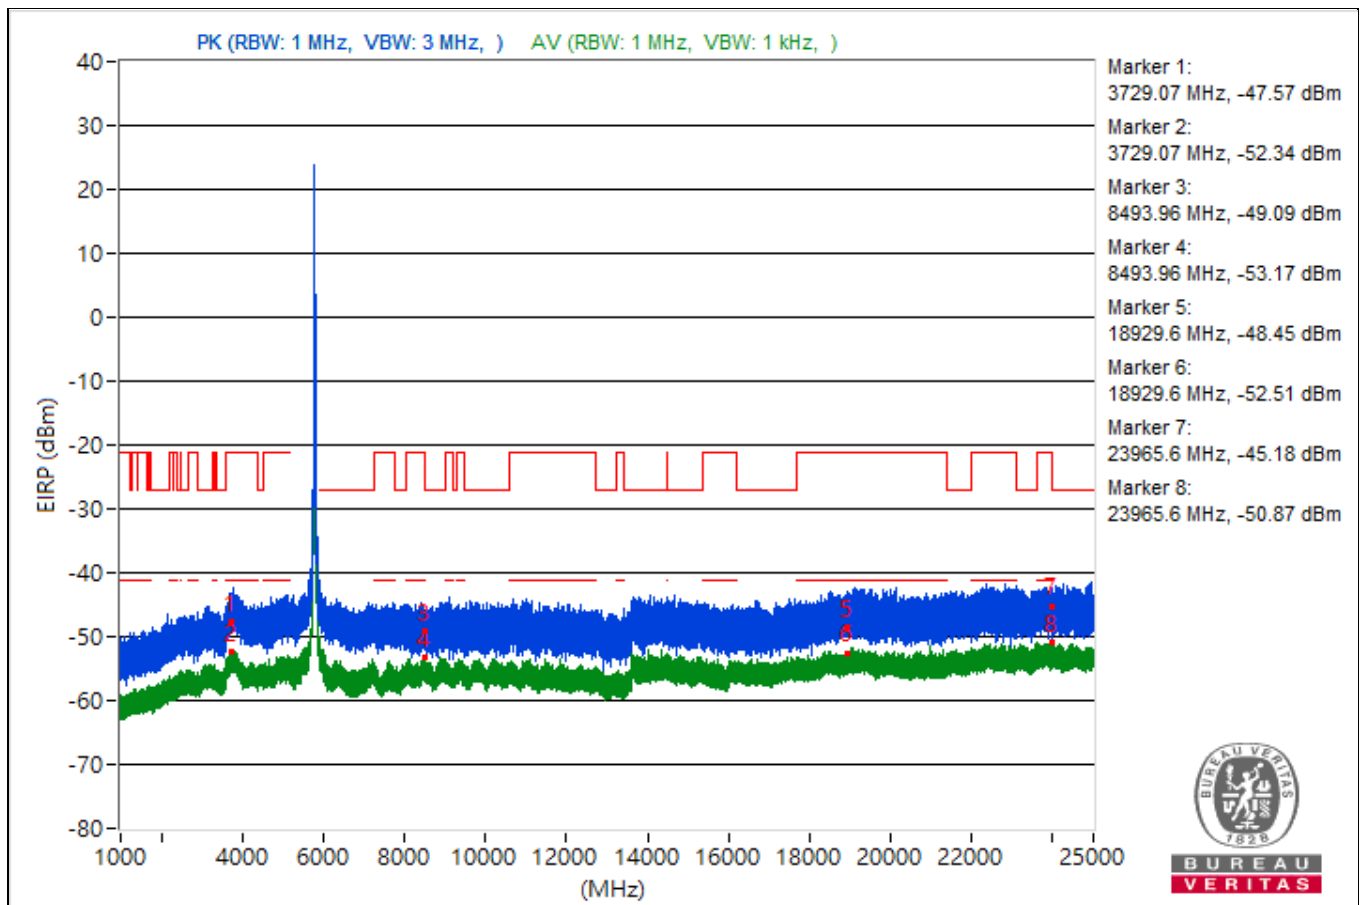


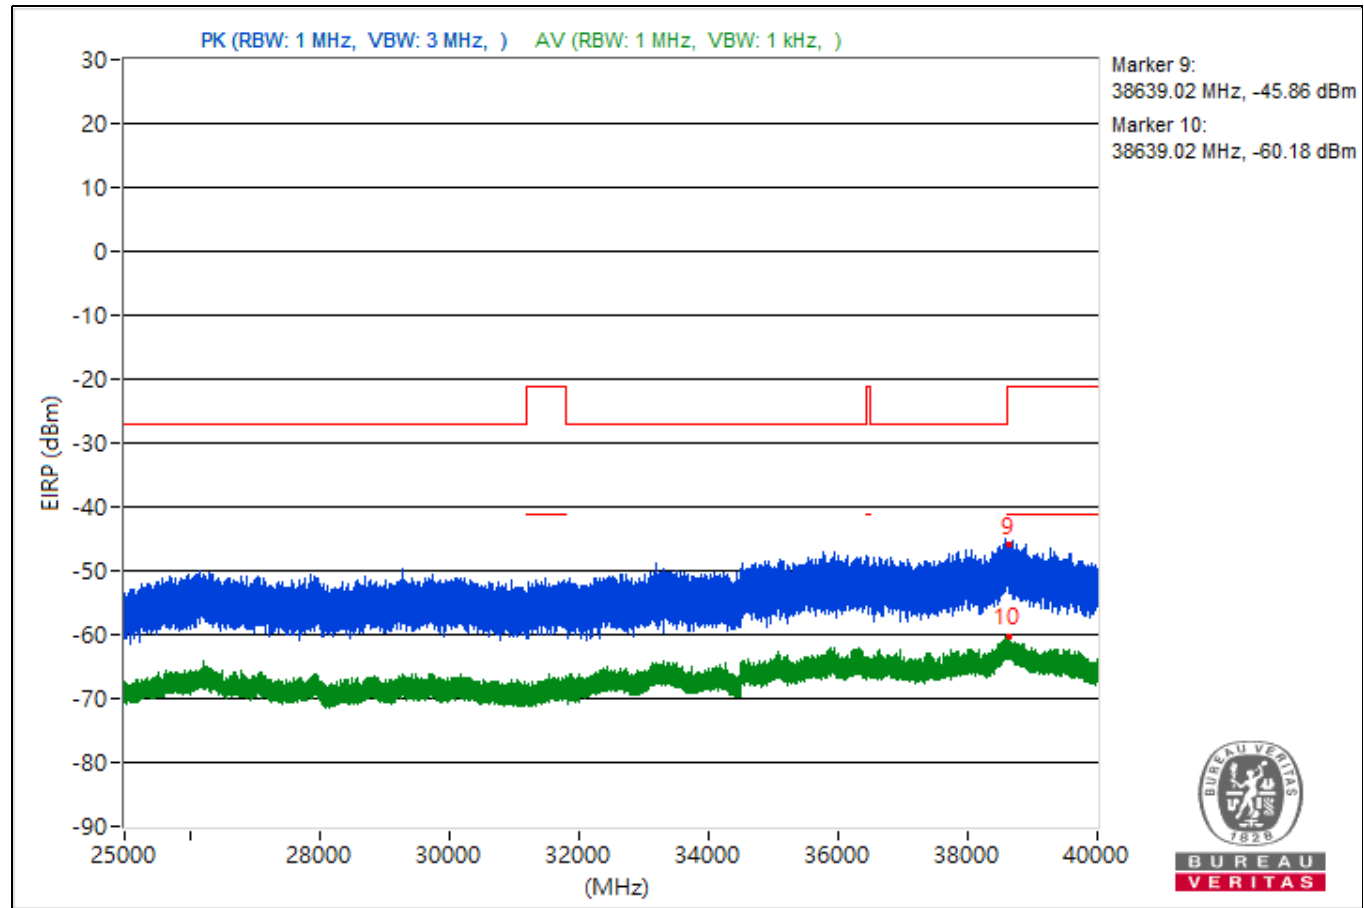


RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.13	48.09 PK	74	-25.91	-54.48	-55.82	4.92	-47.17
2	3742.13	43.02 AV	54	-10.98	-62.69	-58.58	4.92	-52.24
3	9356.71	45.51 PK	74	-28.49	-58.99	-56.67	4.92	-49.75
4	9356.71	41.96 AV	54	-12.04	-60.35	-62.33	4.92	-53.3
5	18619.3	50.28 PK	74	-23.72	-52.12	-53.89	4.92	-44.98
6	18619.3	42.99 AV	54	-11.01	-61.72	-59.08	4.92	-52.27
7	22366.8	51.02 PK	74	-22.98	-51.39	-53.12	4.92	-44.24
8	22366.8	44.76 AV	54	-9.24	-59.91	-57.32	4.92	-50.5
9	38650.22	47.91 PK	74	-26.09	-54.76	-55.87	4.92	-47.35
10	38650.22	34.56 AV	54	-19.44	-67.78	-69.68	4.92	-60.7

Note: Margin value = Emission Level - Limit value

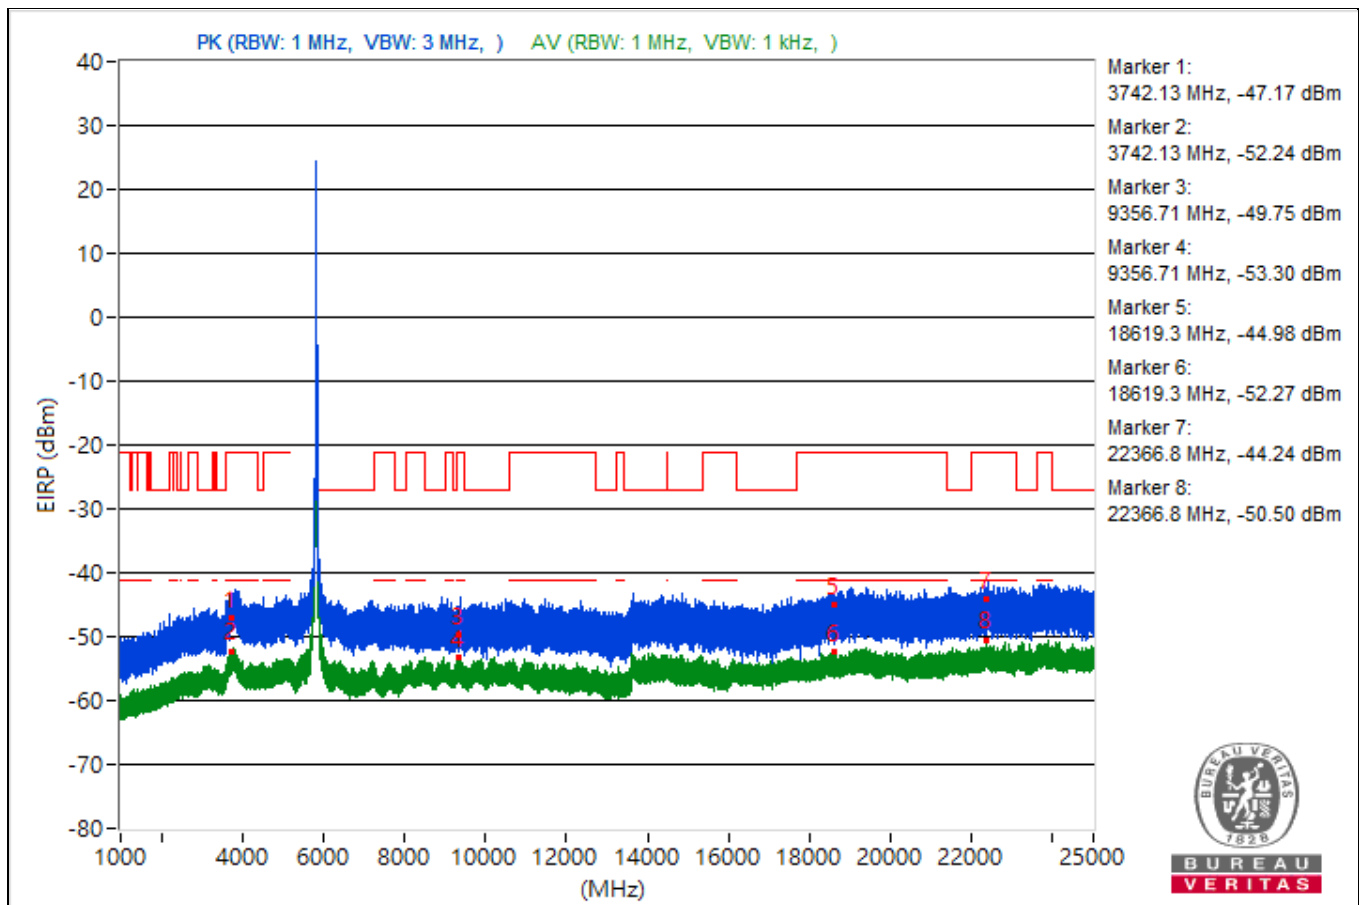


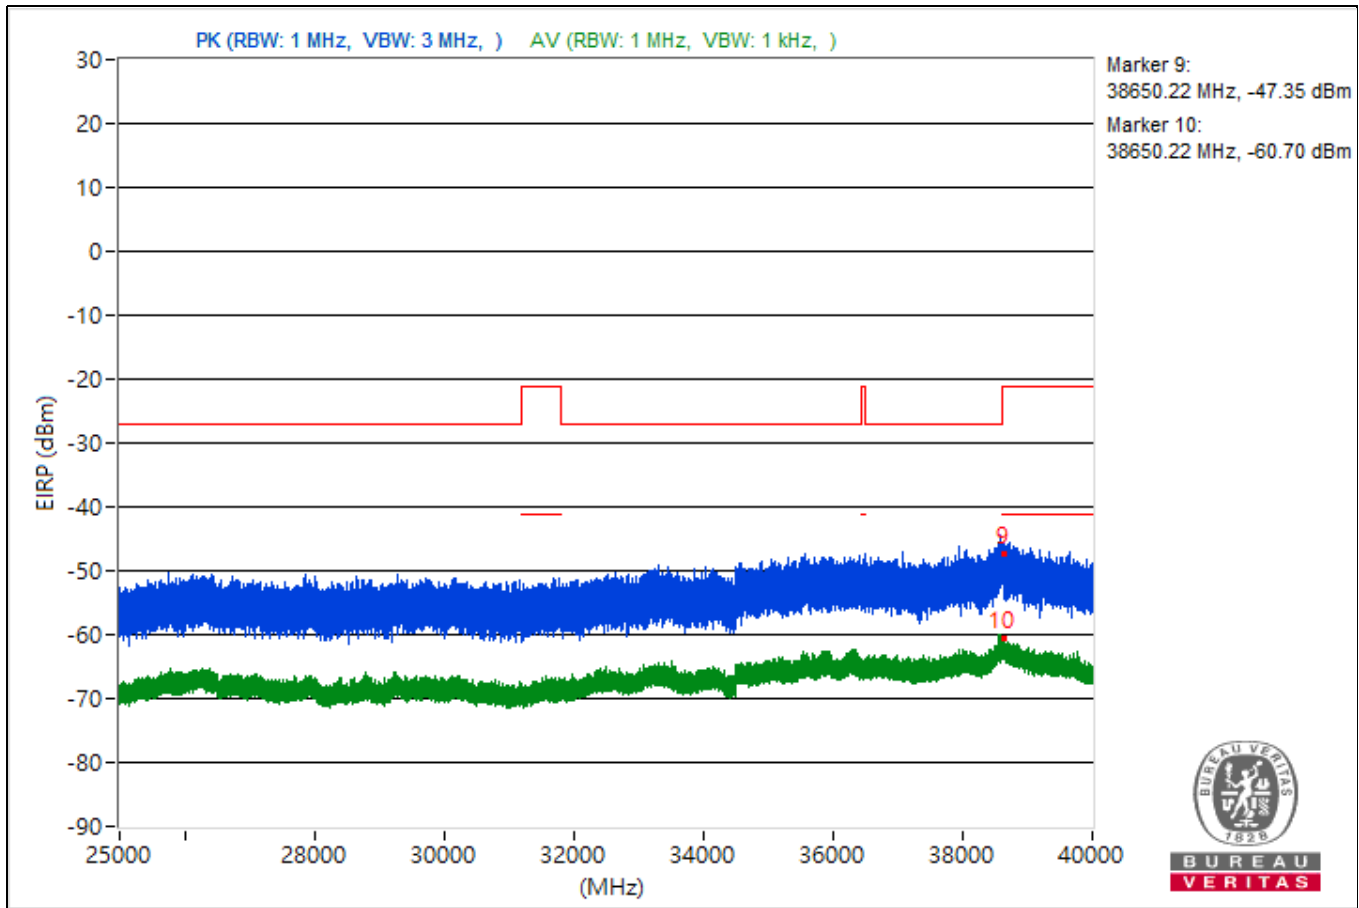


RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.49	54.5 PK	74	-19.5	-48.41	-49	4.92	-40.76
2	5097.49	48.54 AV	54	-5.46	-55.31	-54.08	4.92	-46.72
3	10609.78	46.14 PK	74	-27.86	-56.68	-57.45	4.92	-49.12
4	10609.78	42.83 AV	54	-11.17	-59.82	-60.97	4.92	-52.43
5	18947.8	49.75 PK	74	-24.25	-52.78	-54.22	4.92	-45.51
6	18947.8	42.97 AV	54	-11.03	-63.04	-58.52	4.92	-52.29
7	22331.1	49.26 PK	74	-24.74	-54.53	-53.4	4.92	-46
8	22331.1	45.08 AV	54	-8.92	-59.47	-57.08	4.92	-50.18
9	38613.07	45.7 PK	74	-28.3	-57.05	-57.98	4.92	-49.56
10	38613.07	35.45 AV	54	-18.55	-66.39	-69.71	4.92	-59.81

Note: Margin value = Emission Level - Limit value

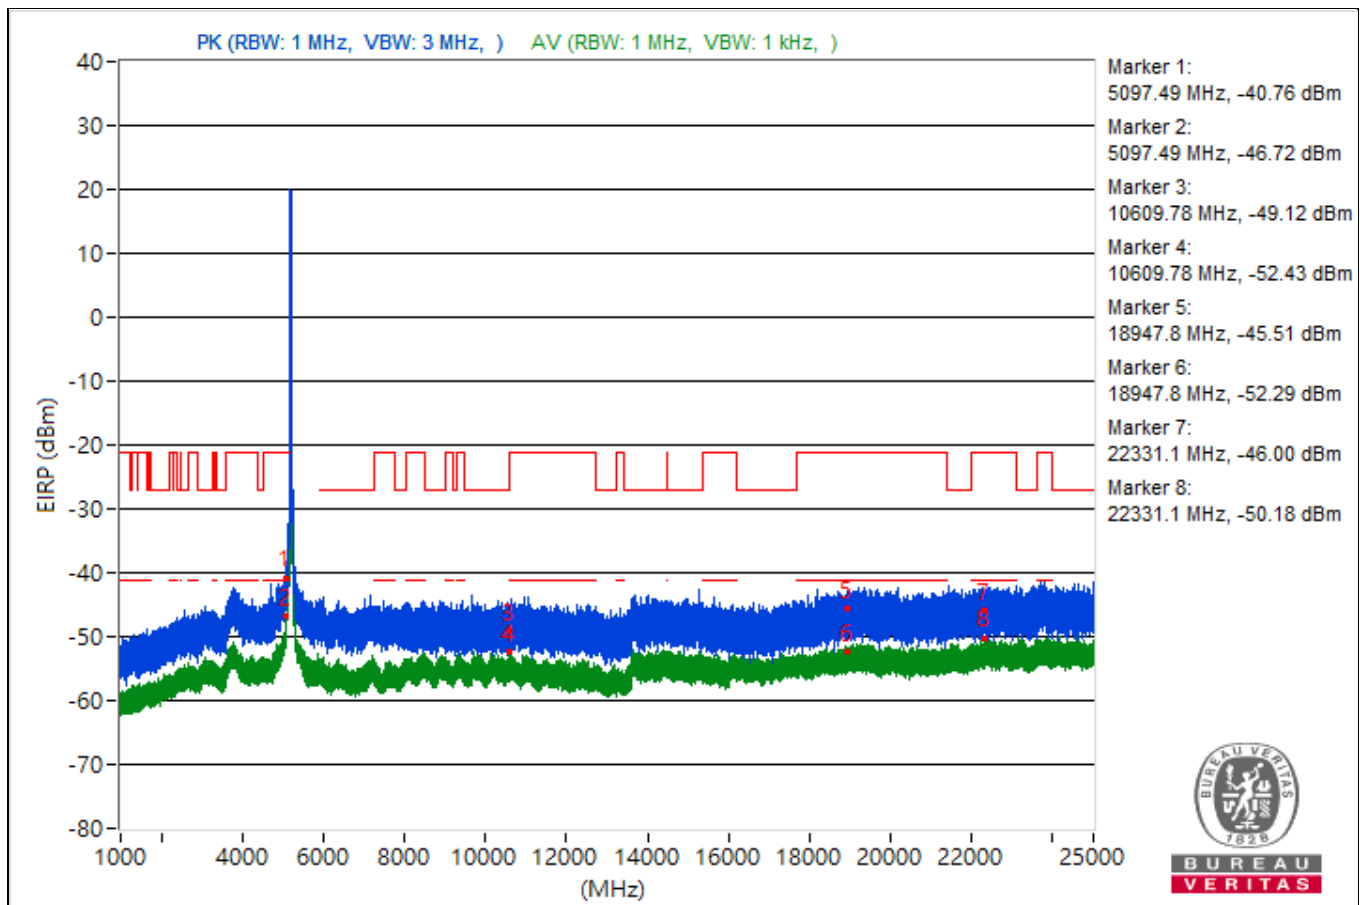


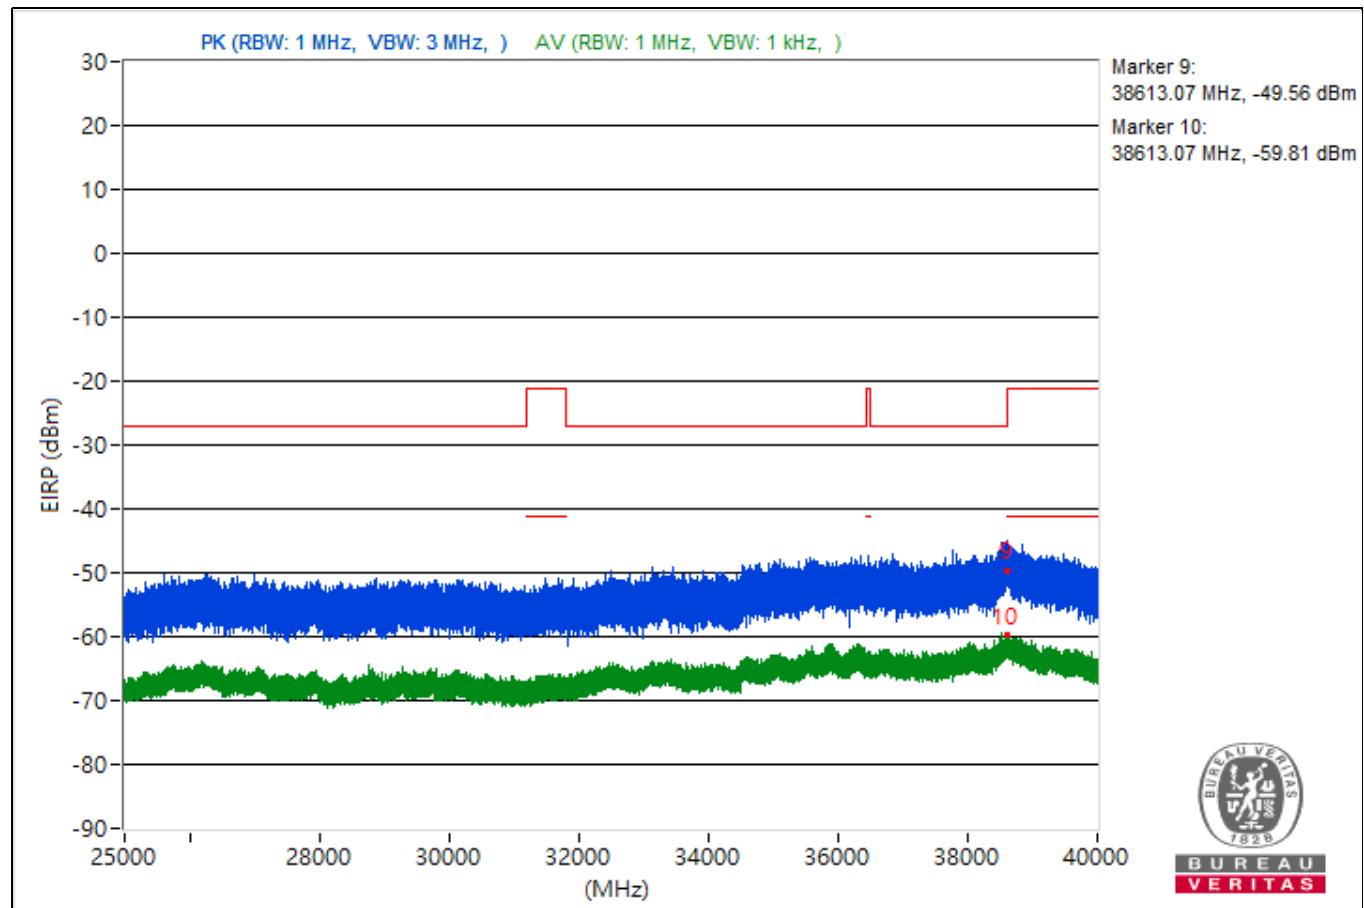


RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.59	54.33 PK	74	-19.67	-47.4	-51.06	4.92	-40.93
2	5099.59	47.79 AV	54	-6.21	-54.73	-56.2	4.92	-47.47
3	9319.91	45.74 PK	74	-28.26	-57.14	-57.78	4.92	-49.52
4	9319.91	42.43 AV	54	-11.57	-62.62	-59.47	4.92	-52.83
5	18471.2	48.91 PK	74	-25.09	-54.48	-54.09	4.92	-46.35
6	18471.2	43.11 AV	54	-10.89	-62.25	-58.64	4.92	-52.15
7	22785	51.85 PK	74	-22.15	-52.13	-50.67	4.92	-43.41
8	22785	44.78 AV	54	-9.22	-57.23	-60.05	4.92	-50.48
9	38635.2	45.67 PK	74	-28.33	-60.21	-55.88	4.92	-49.59
10	38635.2	34.77 AV	54	-19.23	-70.52	-67.01	4.92	-60.49

Note: Margin value = Emission Level - Limit value

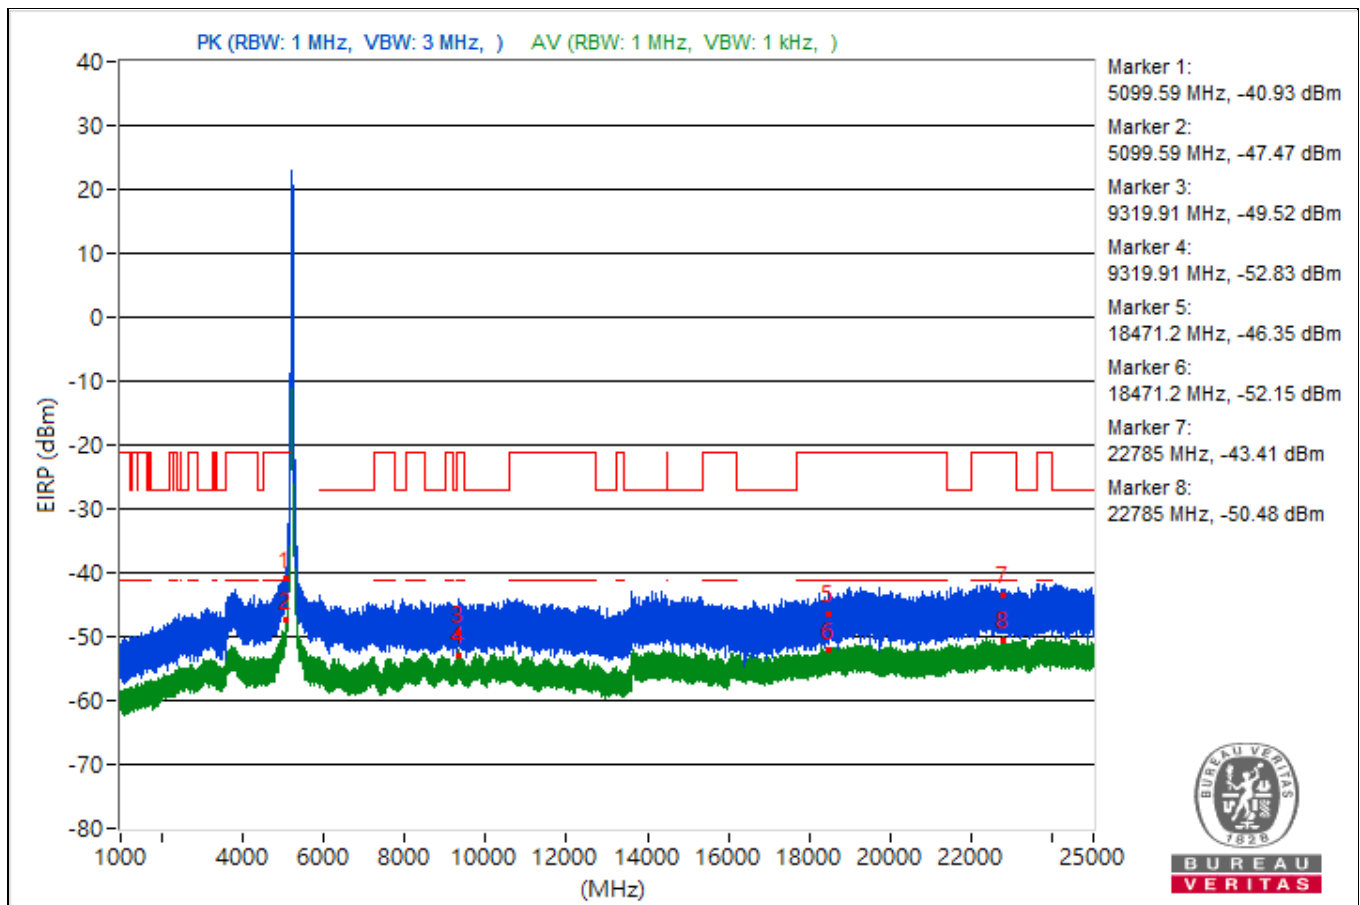


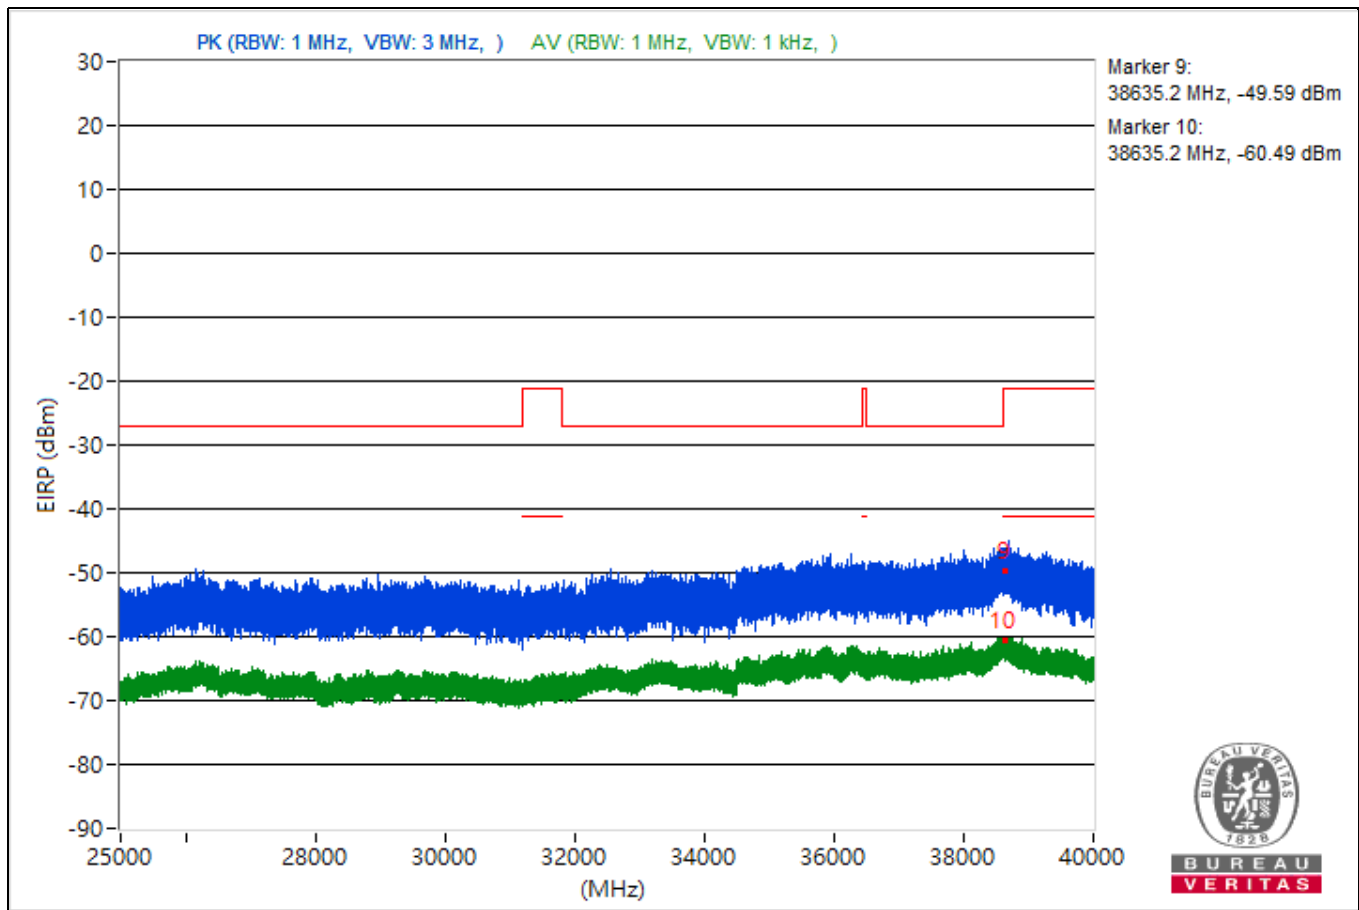


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5076.72	50.96 PK	74	-23.04	-52.46	-52.01	4.92	-44.3
2	5076.72	46.34 AV	54	-7.66	-56.12	-57.72	4.92	-48.92
3	8458.4	48.02 PK	74	-25.98	-53.93	-56.9	4.92	-47.24
4	8458.4	42.47 AV	54	-11.53	-59.77	-61.95	4.92	-52.79
5	18921.2	46.64 PK	74	-27.36	-56.23	-56.89	4.92	-48.62
6	18921.2	43.7 AV	54	-10.3	-60.43	-58.72	4.92	-51.56
7	23733.7	50.53 PK	74	-23.47	-52.74	-52.59	4.92	-44.73
8	23733.7	44.47 AV	54	-9.53	-60.96	-57.24	4.92	-50.79
9	38609.16	48 PK	74	-26	-58.14	-53.45	4.92	-47.26
10	38609.16	35.86 AV	54	-18.14	-68.27	-66.57	4.92	-59.4

Note: Margin value = Emission Level - Limit value

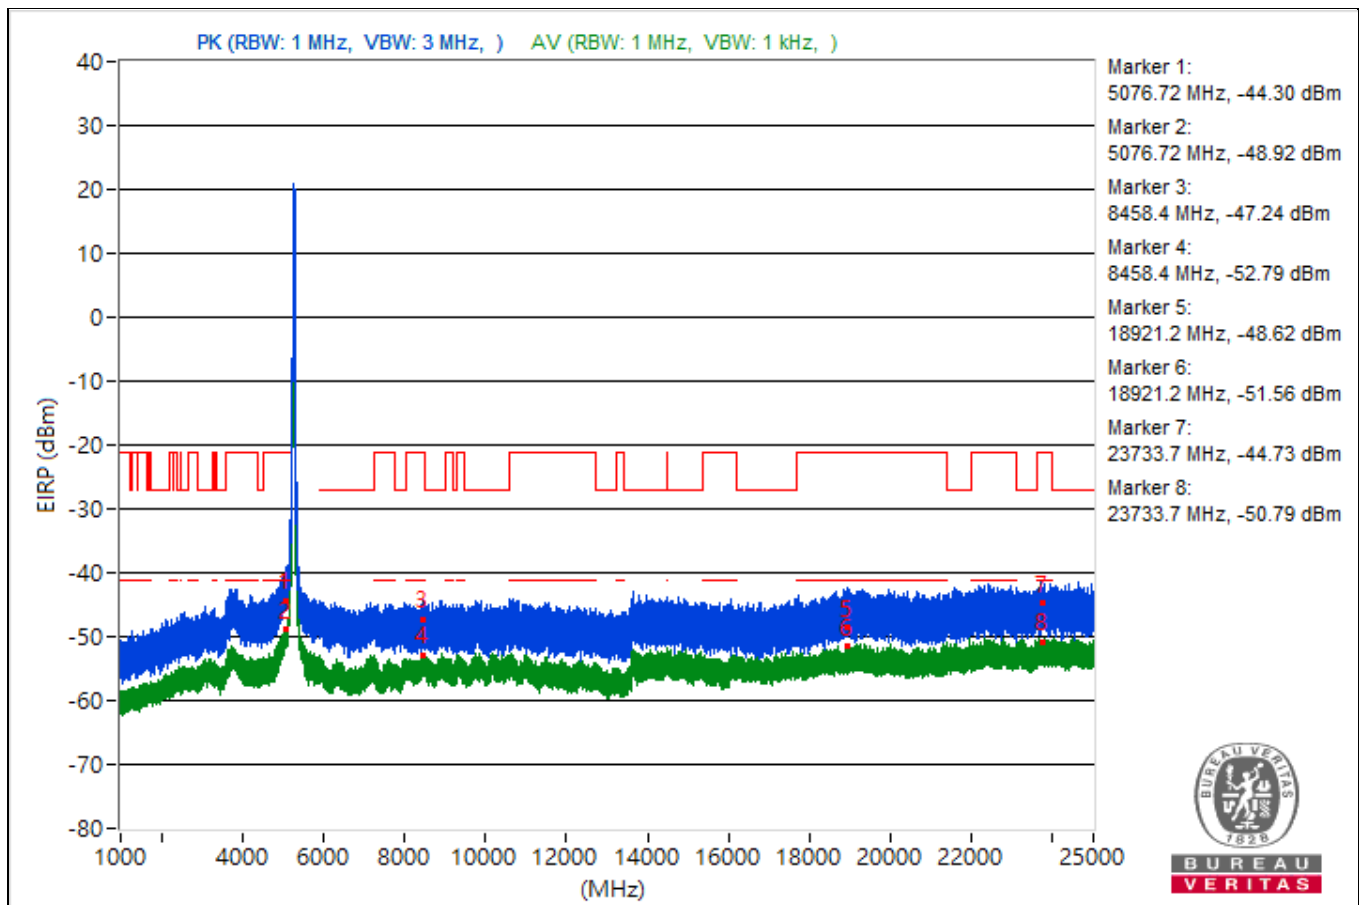


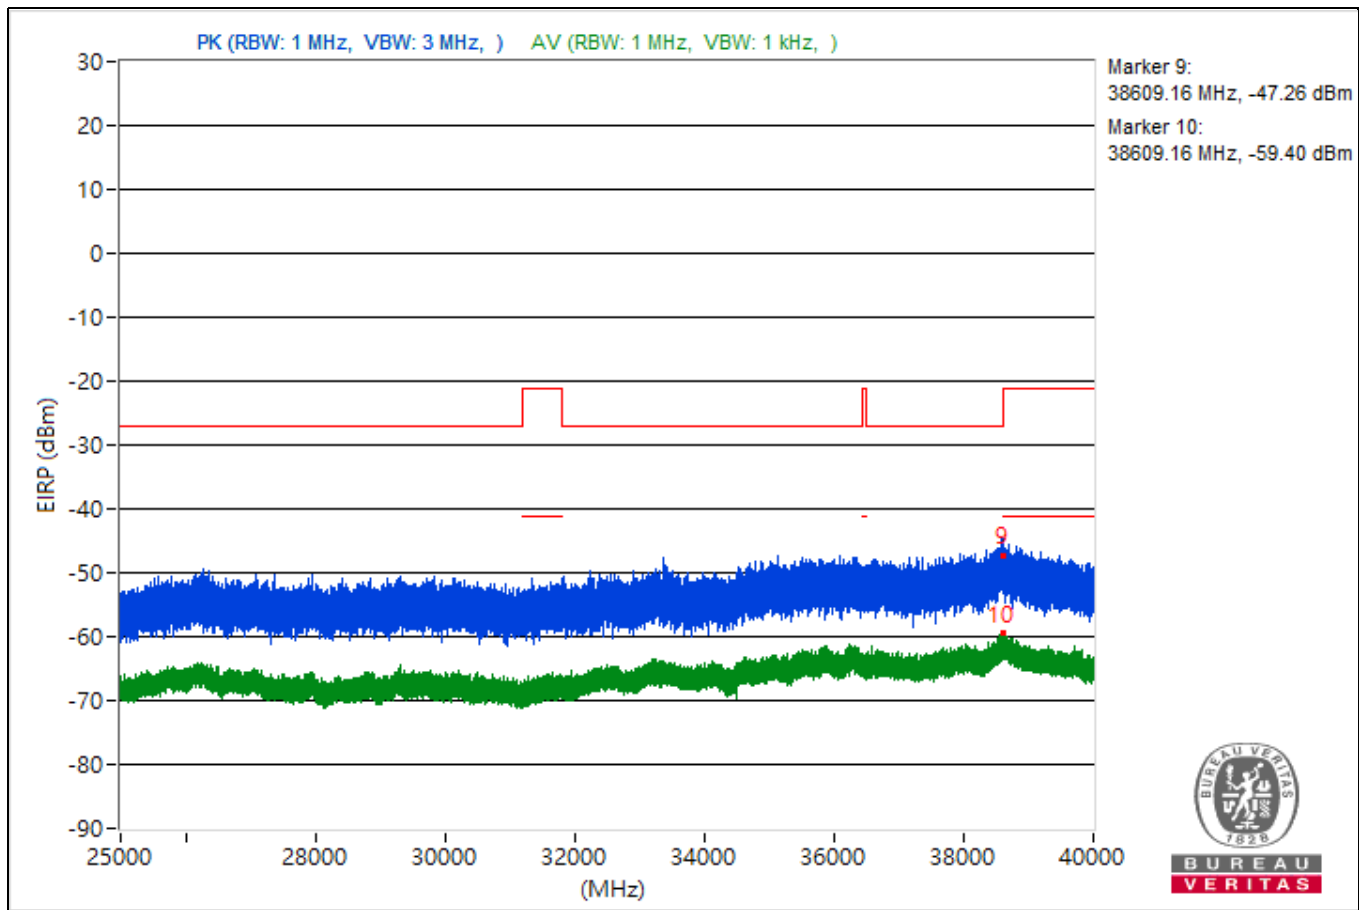


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5078.43	53.46 PK	74	-20.54	-49.37	-50.12	4.92	-41.8
2	5078.43	45.58 AV	54	-8.42	-58.56	-56.83	4.92	-49.68
3	10627.73	47.89 PK	74	-26.11	-57.1	-54.03	4.92	-47.37
4	10627.73	42.44 AV	54	-11.56	-62.69	-59.42	4.92	-52.82
5	18661	47.4 PK	74	-26.6	-54.54	-57.57	4.92	-47.86
6	18661	43.26 AV	54	-10.74	-58.68	-61.7	4.92	-52
7	23847.7	50.67 PK	74	-23.33	-59.4	-49.98	4.92	-44.59
8	23847.7	44.85 AV	54	-9.15	-59.96	-57.17	4.92	-50.41
9	38612.62	43.19 PK	74	-30.81	-61.4	-58.94	4.92	-52.07
10	38612.62	35.58 AV	54	-18.42	-68.62	-66.8	4.92	-59.68

Note: Margin value = Emission Level - Limit value

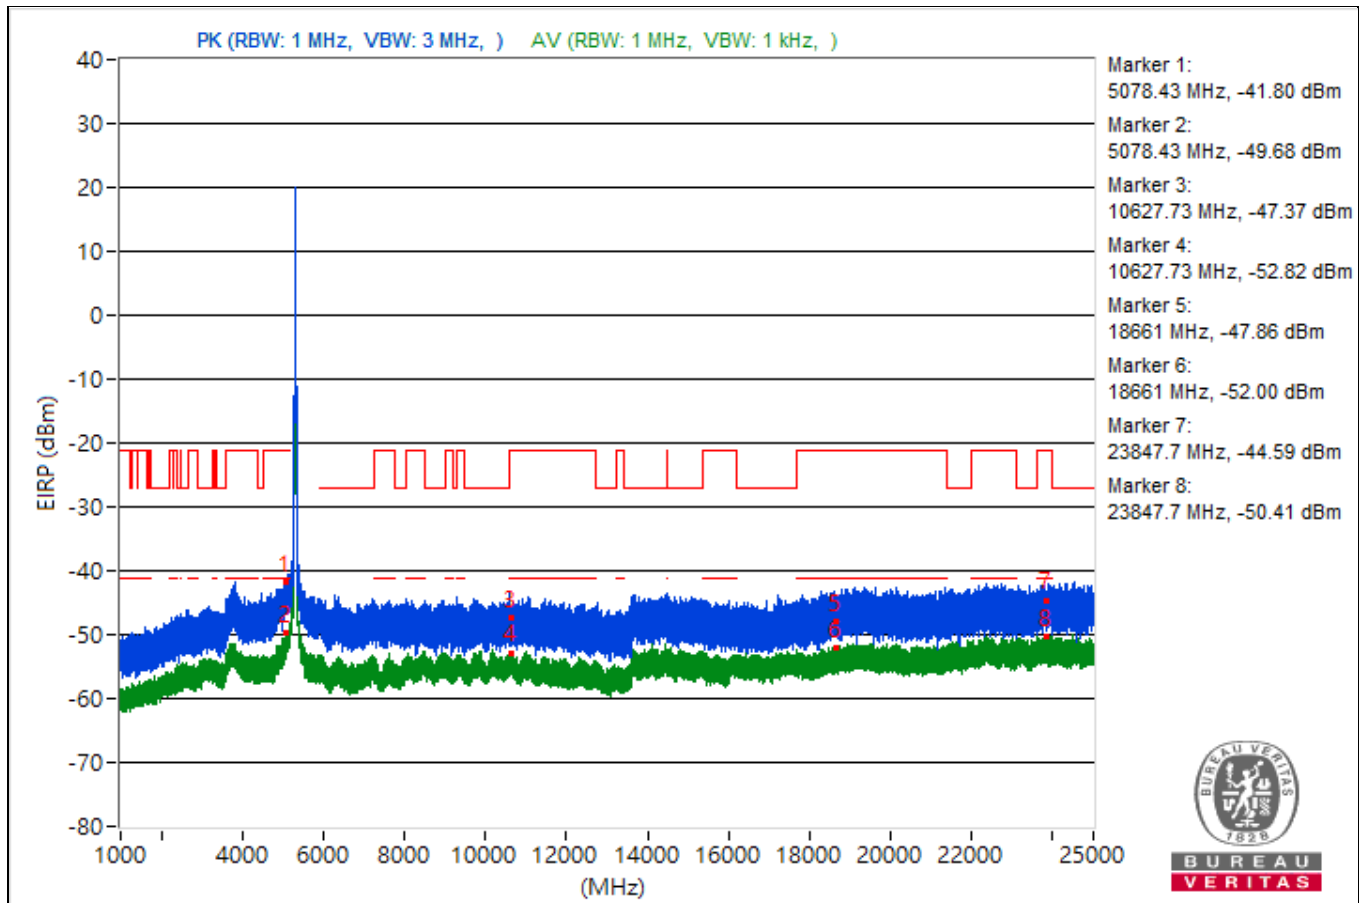


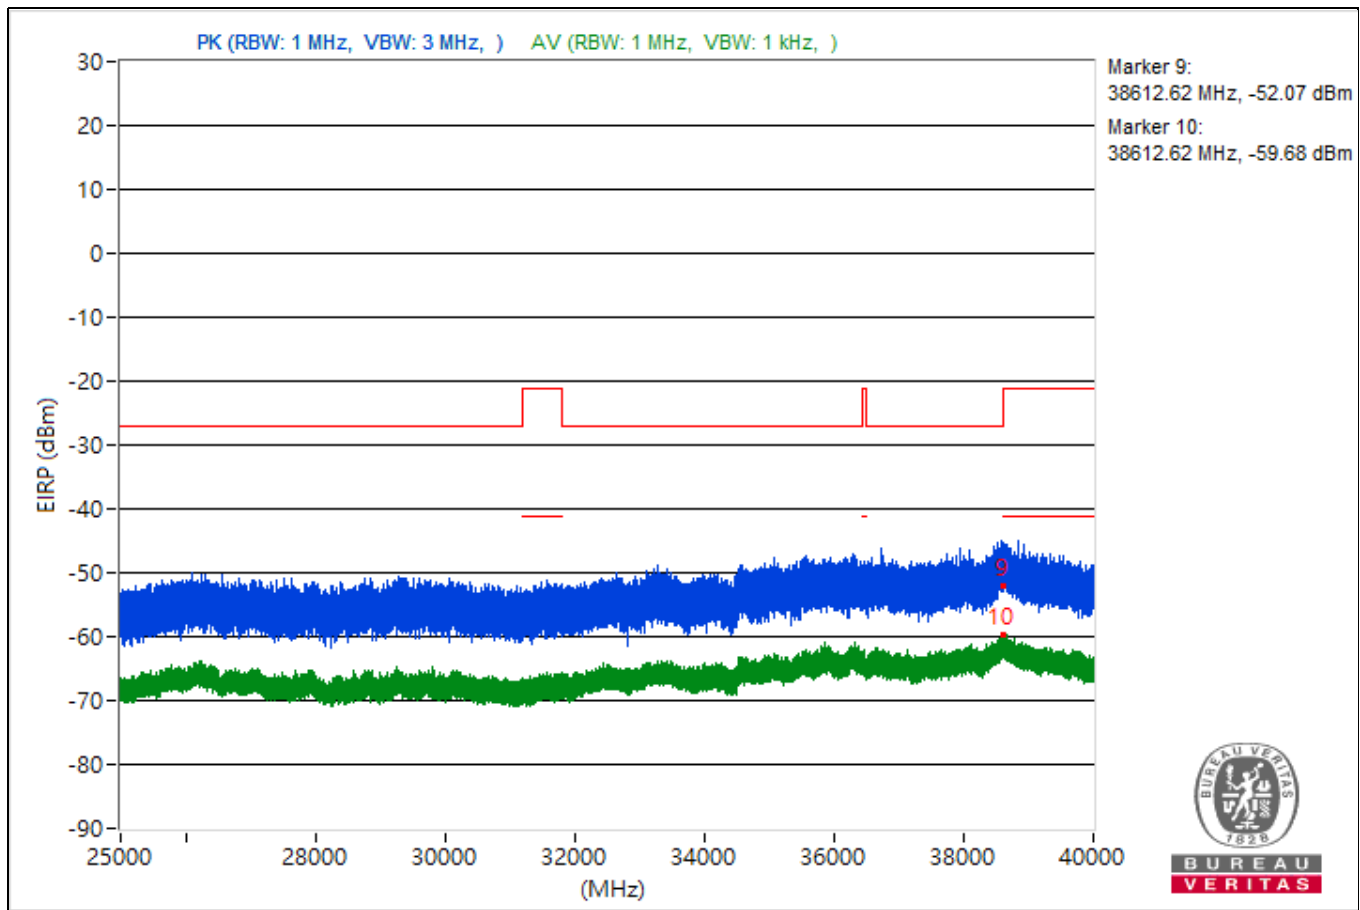


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5086.91	51.53 PK	74	-22.47	-53.73	-50.26	4.92	-43.73
2	5086.91	44.33 AV	54	-9.67	-60.1	-57.91	4.92	-50.93
3	10678.84	47.37 PK	74	-26.63	-54.82	-57.12	4.92	-47.89
4	10678.84	42.04 AV	54	-11.96	-63.05	-59.83	4.92	-53.22
5	18535.3	47.52 PK	74	-26.48	-55.92	-55.44	4.92	-47.74
6	18535.3	43.25 AV	54	-10.75	-58.89	-61.33	4.92	-52.01
7	22723.8	47.76 PK	74	-26.24	-54.58	-56.49	4.92	-47.5
8	22723.8	44.74 AV	54	-9.26	-60.91	-56.88	4.92	-50.52
9	38624.98	47.55 PK	74	-26.45	-55.01	-56.38	4.92	-47.71
10	38624.98	35.32 AV	54	-18.68	-66.61	-69.63	4.92	-59.94

Note: Margin value = Emission Level - Limit value

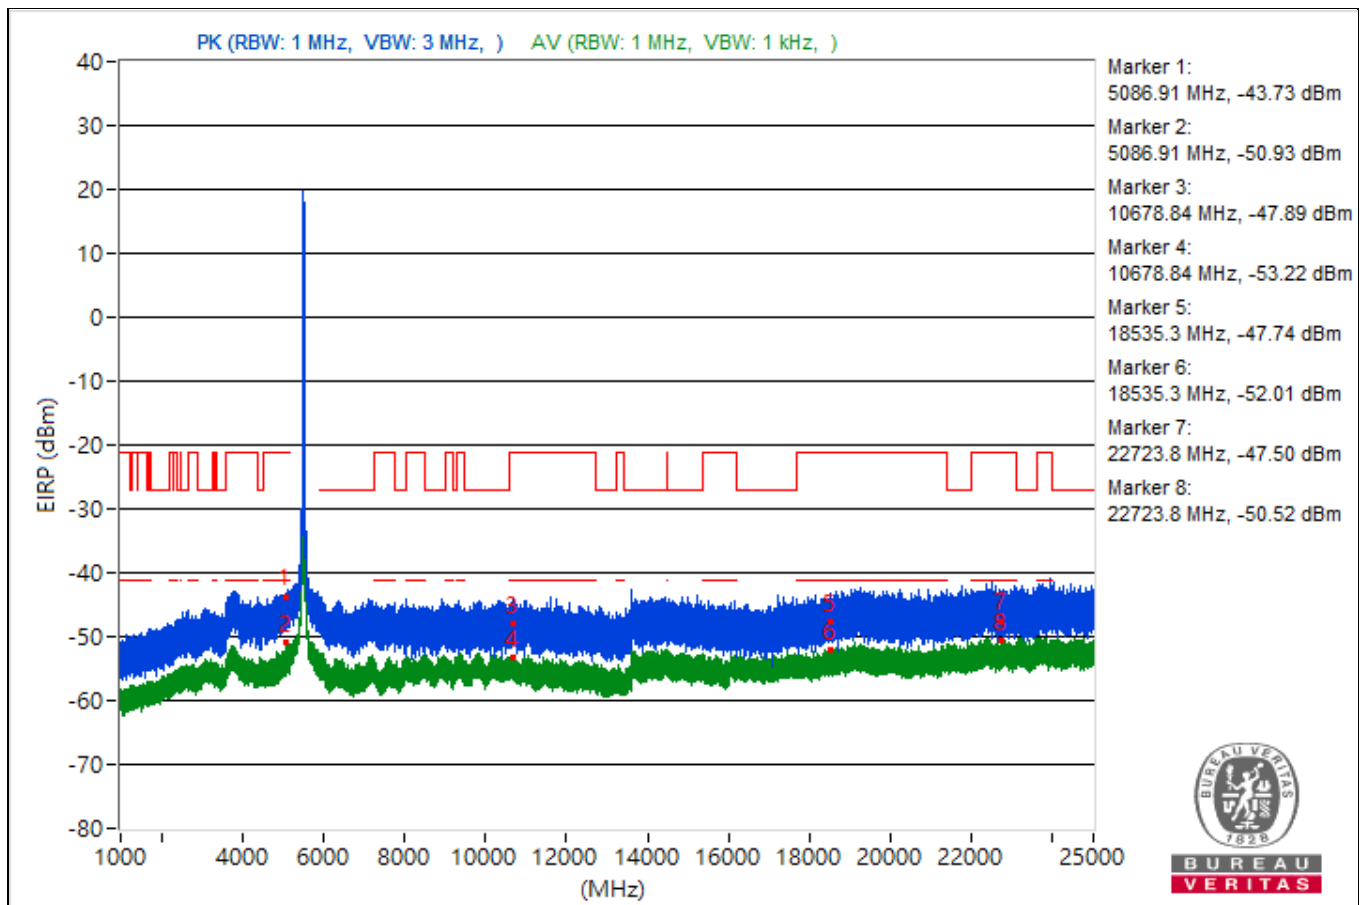


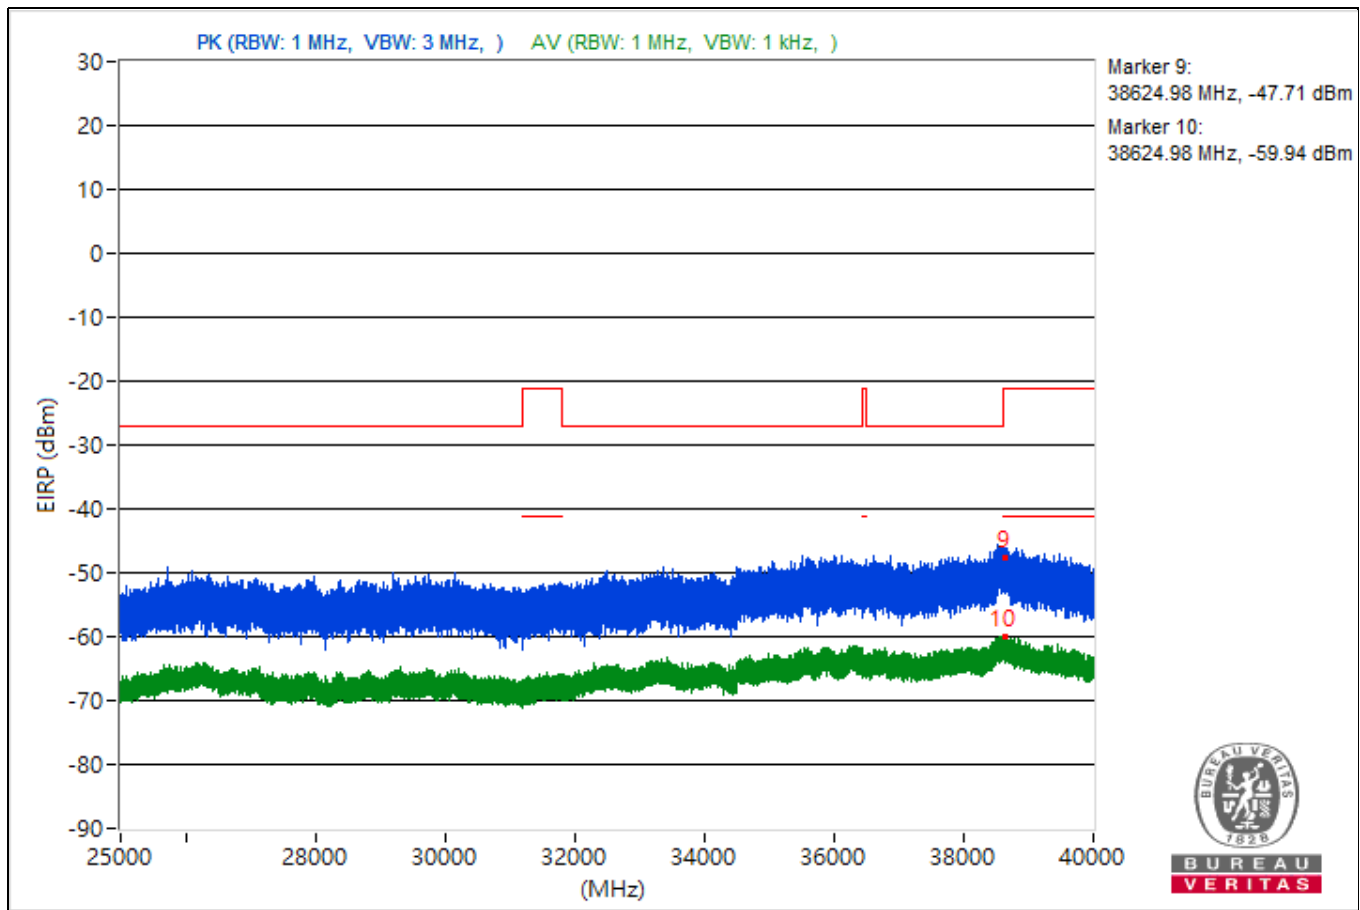


RF Mode	802.11be (EHT40)	Channel	CH 118 : 5590 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3749.06	47.59 PK	74	-26.41	-56.99	-54.55	4.92	-47.67
2	3749.06	43.56 AV	54	-10.44	-58.36	-61.44	4.92	-51.7
3	9408.8	45.68 PK	74	-28.32	-56.54	-58.76	4.92	-49.58
4	9408.8	42.16 AV	54	-11.84	-62.14	-60.14	4.92	-53.1
5	18805.5	48.49 PK	74	-25.51	-56.72	-53.32	4.92	-46.77
6	18805.5	43.08 AV	54	-10.92	-58.26	-63.4	4.92	-52.18
7	23702.2	49.42 PK	74	-24.58	-54.53	-53.12	4.92	-45.84
8	23702.2	44.88 AV	54	-9.12	-60.02	-57.09	4.92	-50.38
9	38609.42	44.46 PK	74	-29.54	-58.17	-59.37	4.92	-50.8
10	38609.42	34.76 AV	54	-19.24	-66.94	-70.71	4.92	-60.5

Note: Margin value = Emission Level - Limit value

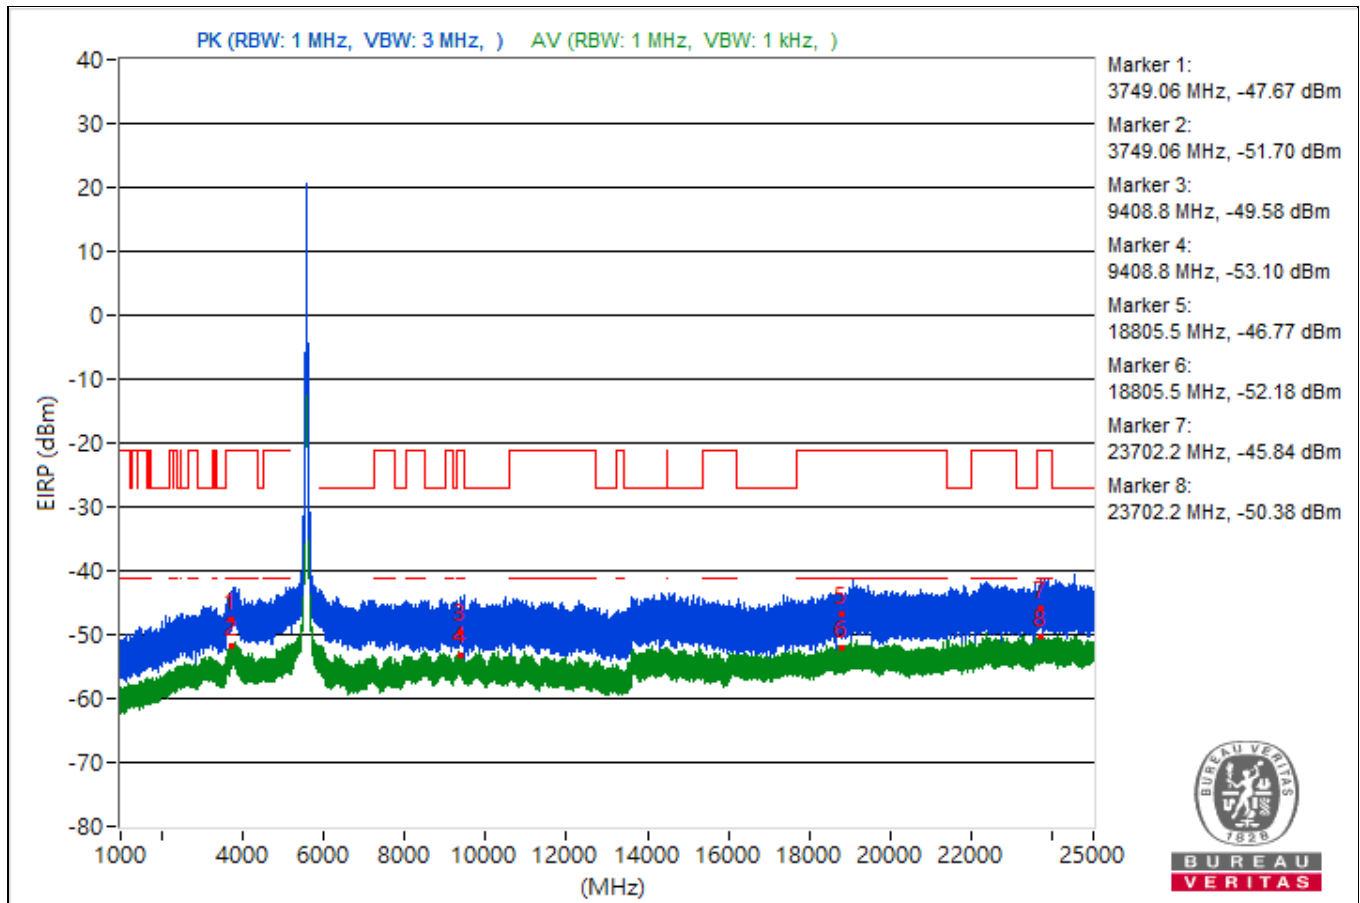


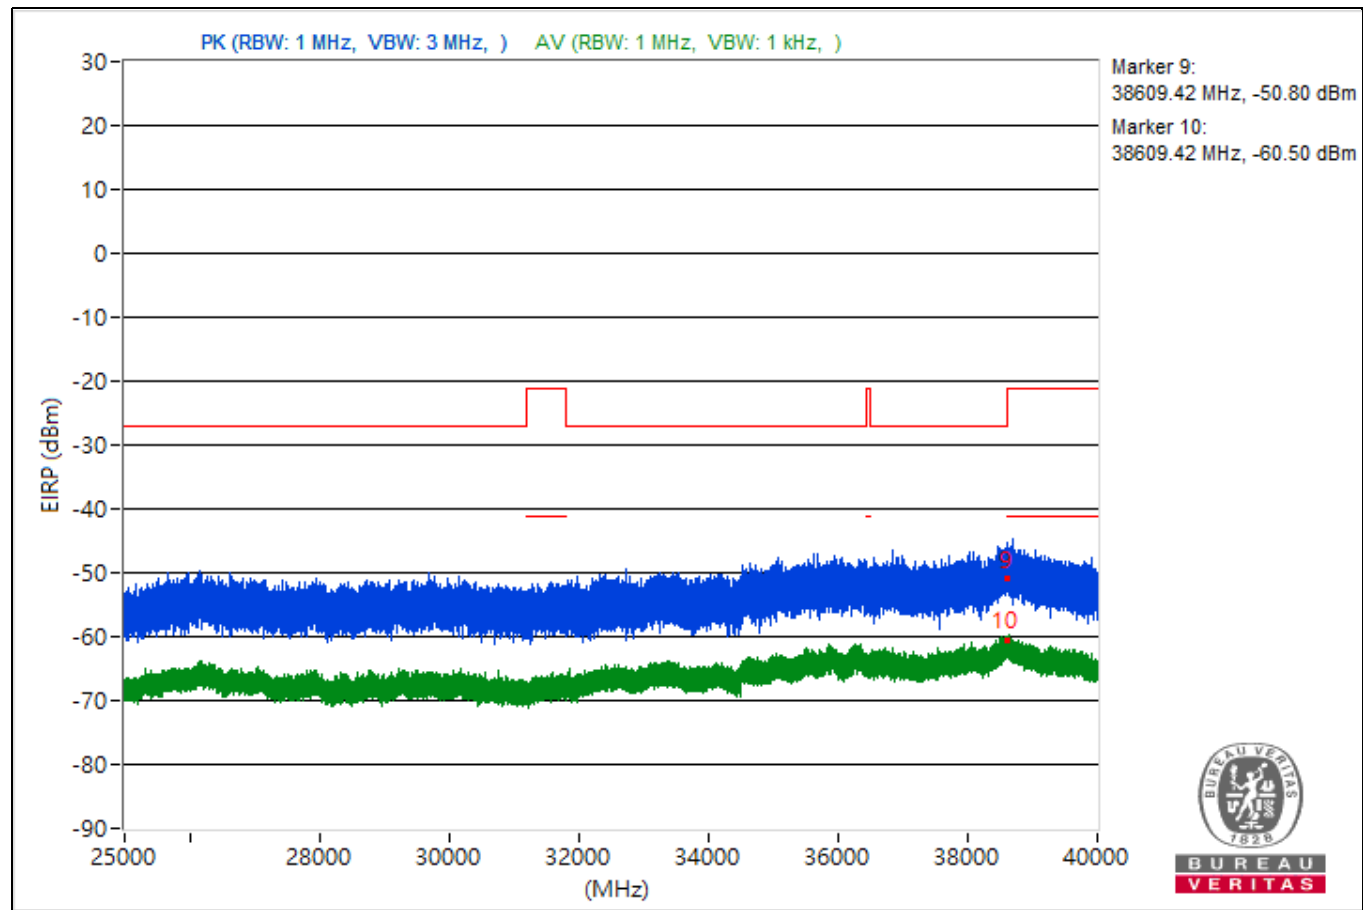


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.97	48.92 PK	74	-25.08	-54.81	-53.8	4.92	-46.34
2	3782.97	43.82 AV	54	-10.18	-58.5	-60.48	4.92	-51.44
3	11013.33	45.32 PK	74	-28.68	-58.89	-57.05	4.92	-49.94
4	11013.33	42.17 AV	54	-11.83	-59.72	-62.88	4.92	-53.09
5	18890.2	48.23 PK	74	-25.77	-54.86	-55.06	4.92	-47.03
6	18890.2	43.12 AV	54	-10.88	-58.81	-61.83	4.92	-52.14
7	23811.7	49.29 PK	74	-24.71	-53.98	-53.82	4.92	-45.97
8	23811.7	44.99 AV	54	-9.01	-59.17	-57.41	4.92	-50.27
9	38608.44	46.34 PK	74	-27.66	-56.57	-57.16	4.92	-48.92
10	38608.44	35.83 AV	54	-18.17	-65.89	-69.6	4.92	-59.43

Note: Margin value = Emission Level - Limit value

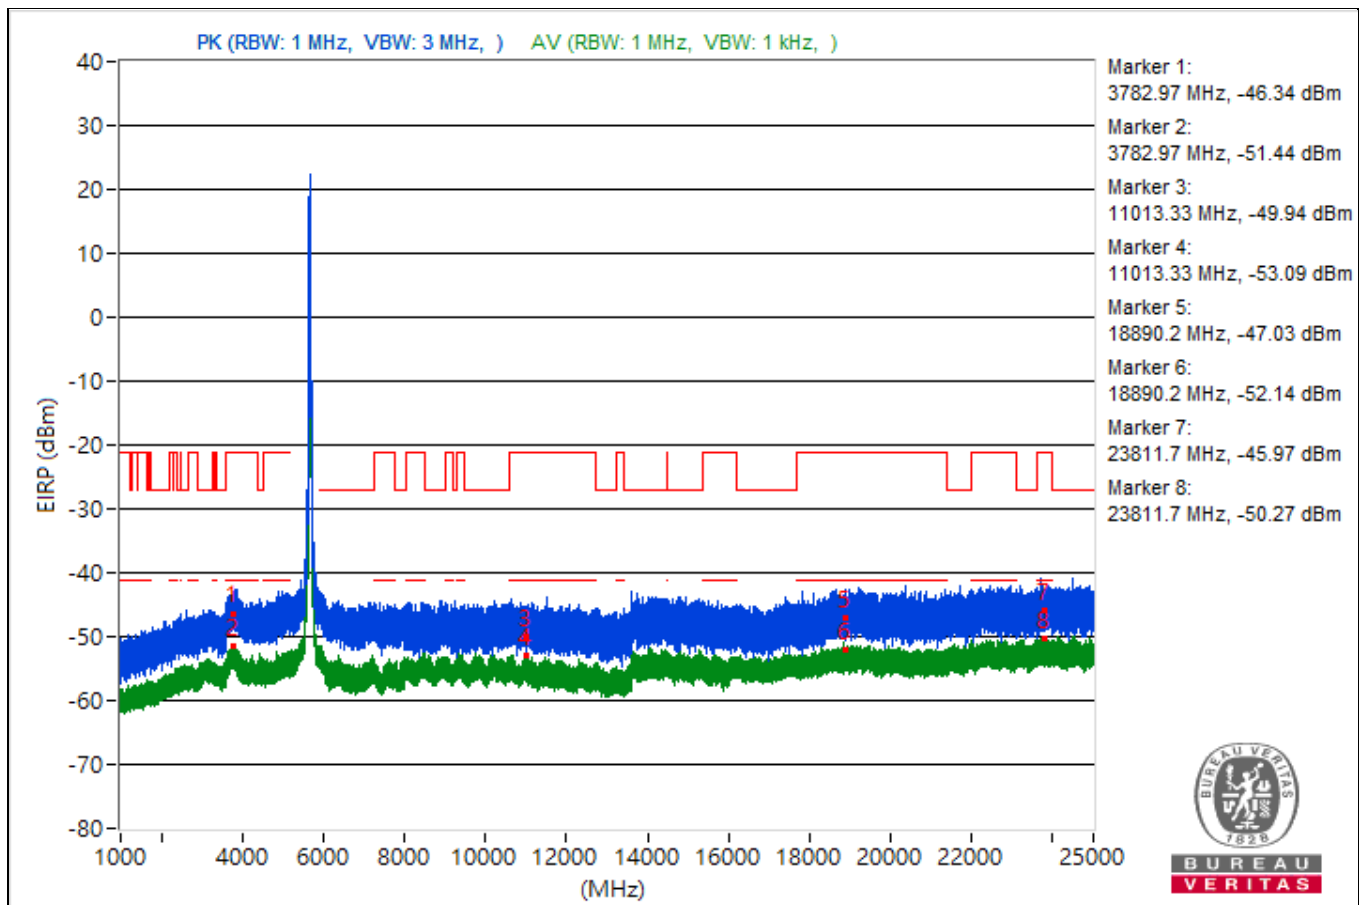


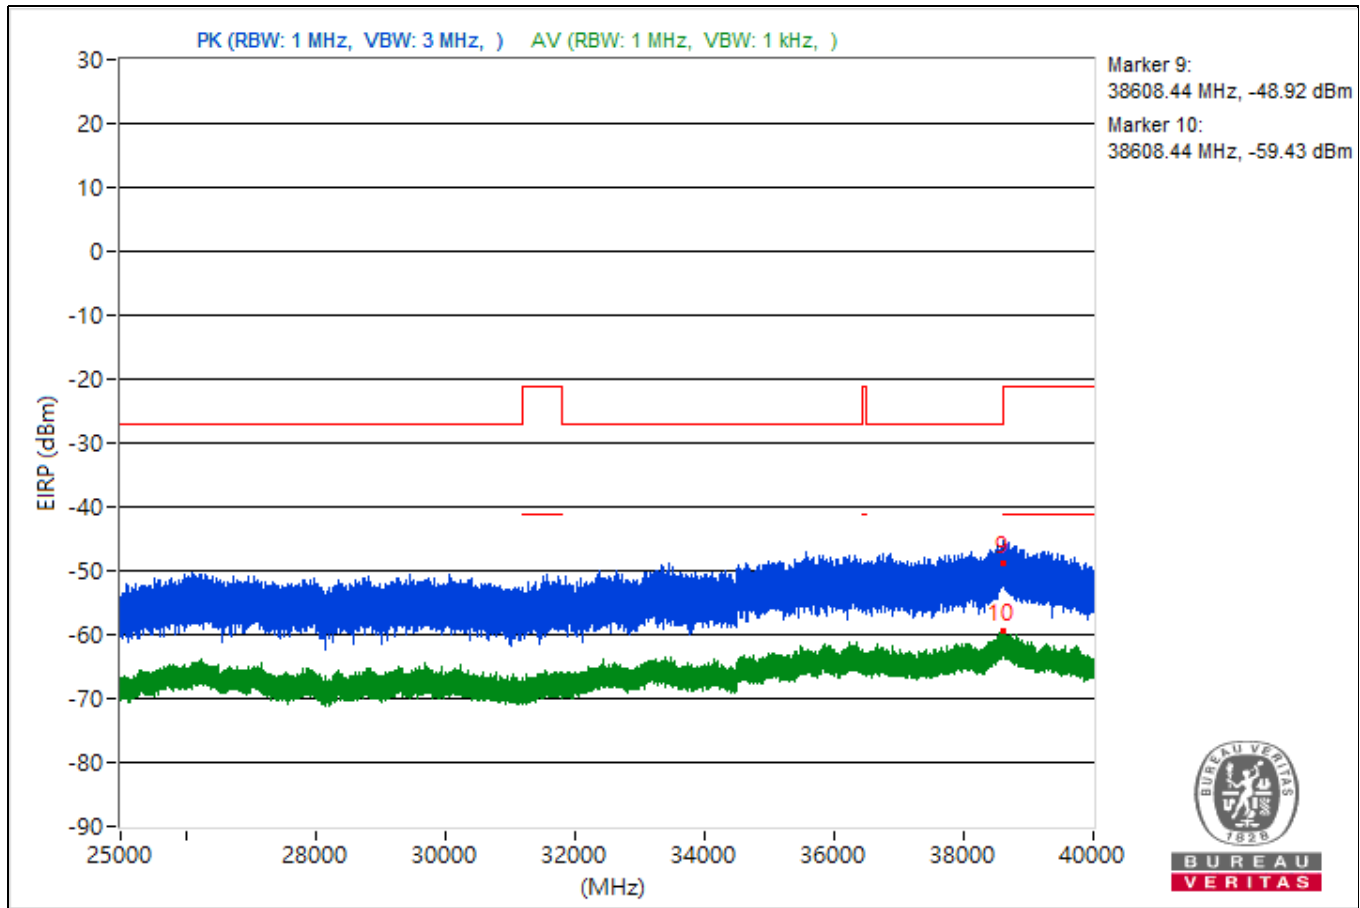


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.46	49.37 PK	74	-24.63	-54.08	-53.57	4.92	-45.89
2	3792.46	43.79 AV	54	-10.21	-58.23	-61	4.92	-51.47
3	10677.51	47.37 PK	74	-26.63	-58.02	-54.37	4.92	-47.89
4	10677.51	41.92 AV	54	-12.08	-63.45	-59.83	4.92	-53.34
5	18878	48.31 PK	74	-25.69	-54.36	-55.48	4.92	-46.95
6	18878	43.47 AV	54	-10.53	-61.07	-58.68	4.92	-51.79
7	23663.4	49.65 PK	74	-24.35	-53.01	-54.13	4.92	-45.61
8	23663.4	45.01 AV	54	-8.99	-60.12	-56.84	4.92	-50.25
9	38609.07	43.61 PK	74	-30.39	-60.21	-59.03	4.92	-51.65
10	38609.07	35.41 AV	54	-18.59	-66.09	-70.57	4.92	-59.85

Note: Margin value = Emission Level - Limit value

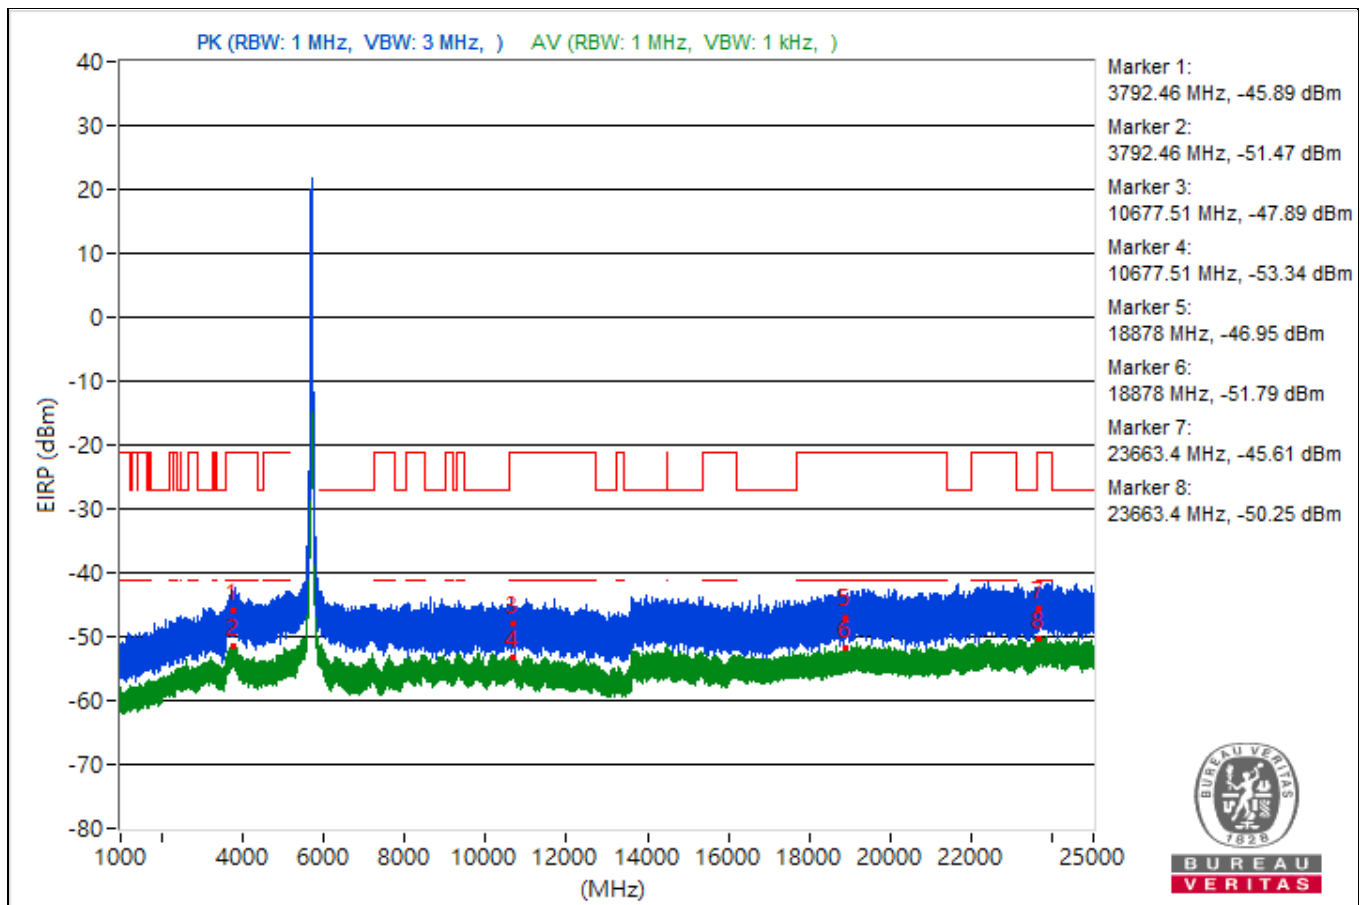


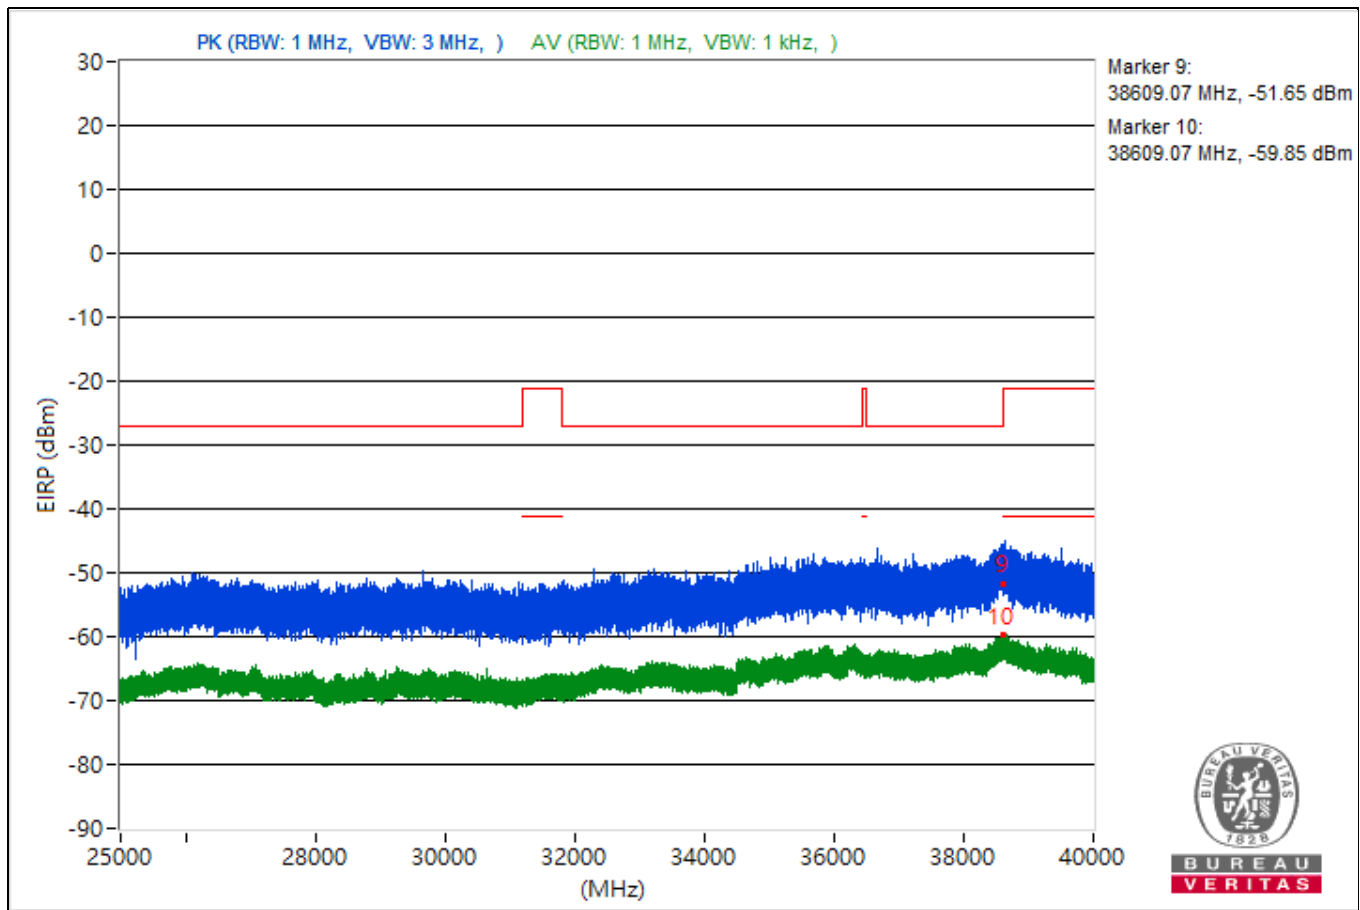


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3730.7	49.95 PK	74	-24.05	-53.3	-53.19	4.92	-45.31
2	3730.7	43.71 AV	54	-10.29	-58.39	-60.94	4.92	-51.55
3	9305.16	46.67 PK	74	-27.33	-56.29	-56.77	4.92	-48.59
4	9305.16	42.73 AV	54	-11.27	-59.5	-61.71	4.92	-52.53
5	18395.6	48.93 PK	74	-25.07	-56.98	-52.61	4.92	-46.33
6	18395.6	43.6 AV	54	-10.4	-60.97	-58.55	4.92	-51.66
7	22820.7	46.83 PK	74	-27.17	-56.81	-55.95	4.92	-48.43
8	22820.7	45.08 AV	54	-8.92	-56.69	-60.25	4.92	-50.18
9	38615.11	46.12 PK	74	-27.88	-57.04	-57.1	4.92	-49.14
10	38615.11	35.68 AV	54	-18.32	-68.75	-66.54	4.92	-59.58

Note: Margin value = Emission Level - Limit value

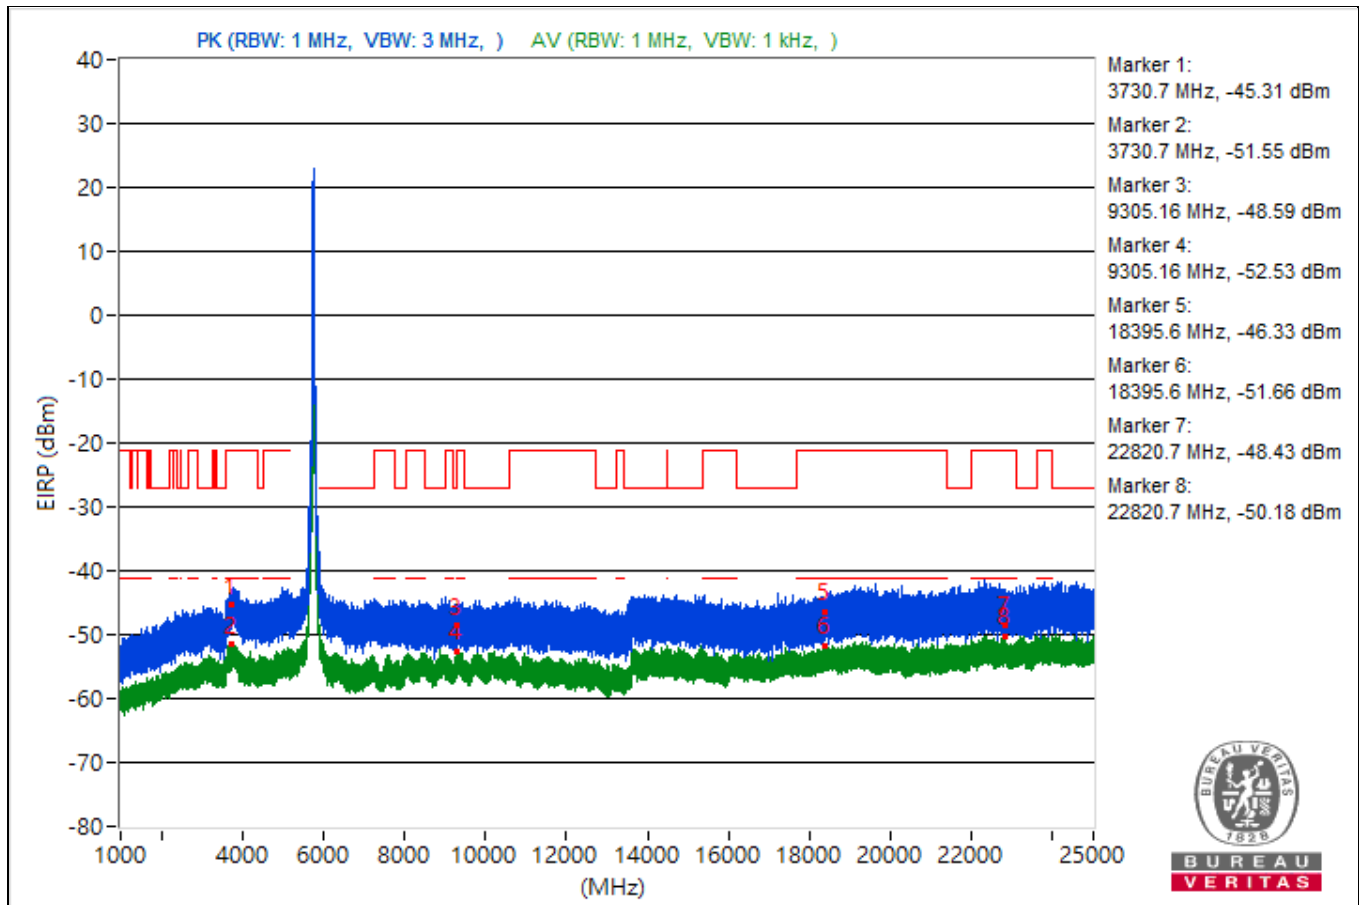


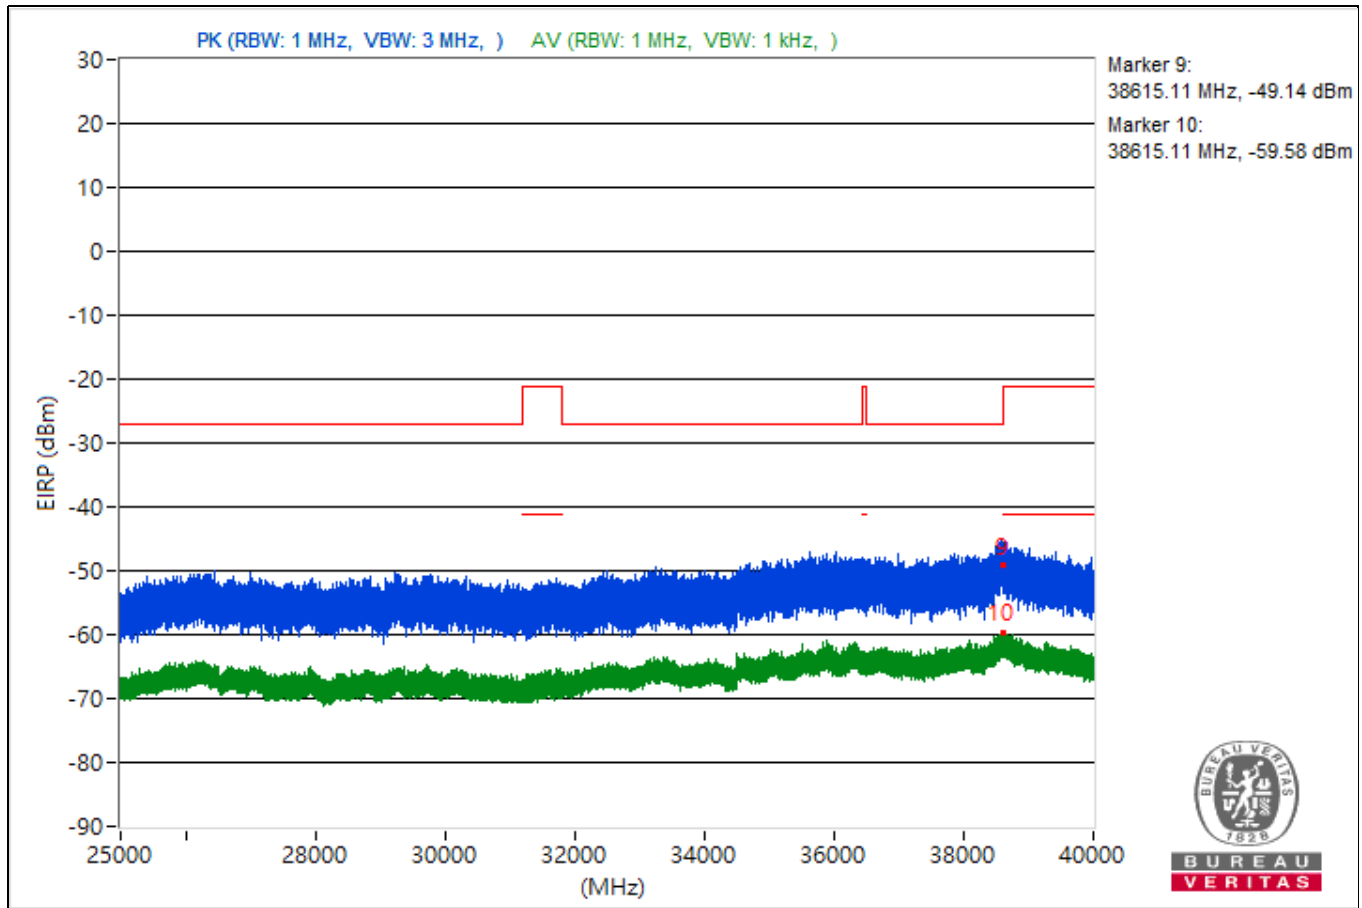


RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.9	50.98 PK	74	-23.02	-52.65	-51.82	4.92	-44.28
2	3825.9	43.9 AV	54	-10.1	-60.38	-58.43	4.92	-51.36
3	9330.49	44.93 PK	74	-29.07	-57.6	-59.03	4.92	-50.33
4	9330.49	42.24 AV	54	-11.76	-59.95	-62.26	4.92	-53.02
5	18911.7	49.06 PK	74	-24.94	-54.8	-53.55	4.92	-46.2
6	18911.7	43.31 AV	54	-10.69	-58.68	-61.54	4.92	-51.95
7	23967.3	49.76 PK	74	-24.24	-53.45	-53.41	4.92	-45.5
8	23967.3	45.24 AV	54	-8.76	-57.14	-58.95	4.92	-50.02
9	38600.98	47.84 PK	74	-26.16	-55.29	-55.41	4.92	-47.42
10	38600.98	36.21 AV	54	-17.79	-65.65	-68.9	4.92	-59.05

Note: Margin value = Emission Level - Limit value

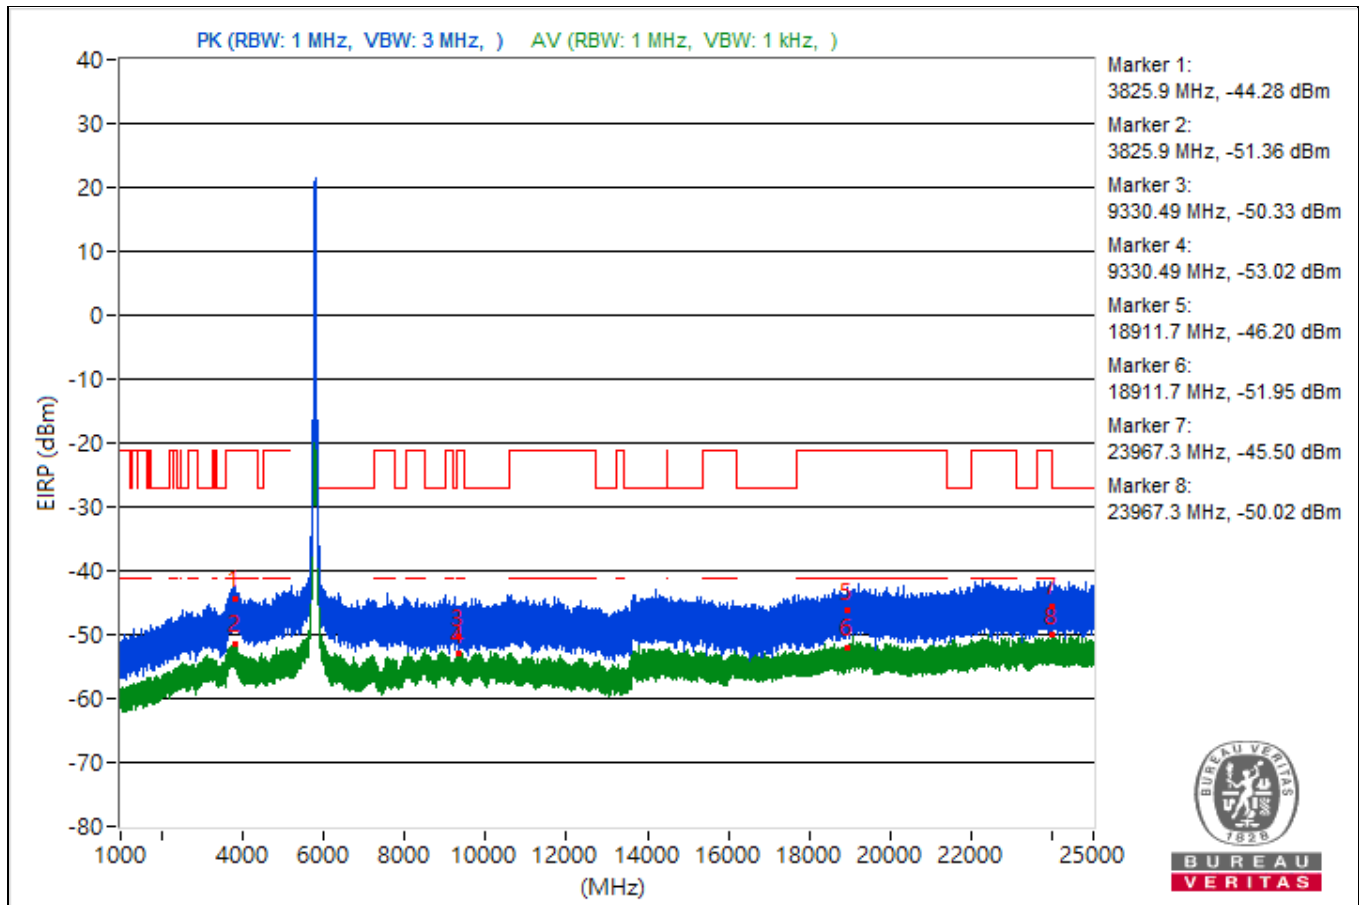


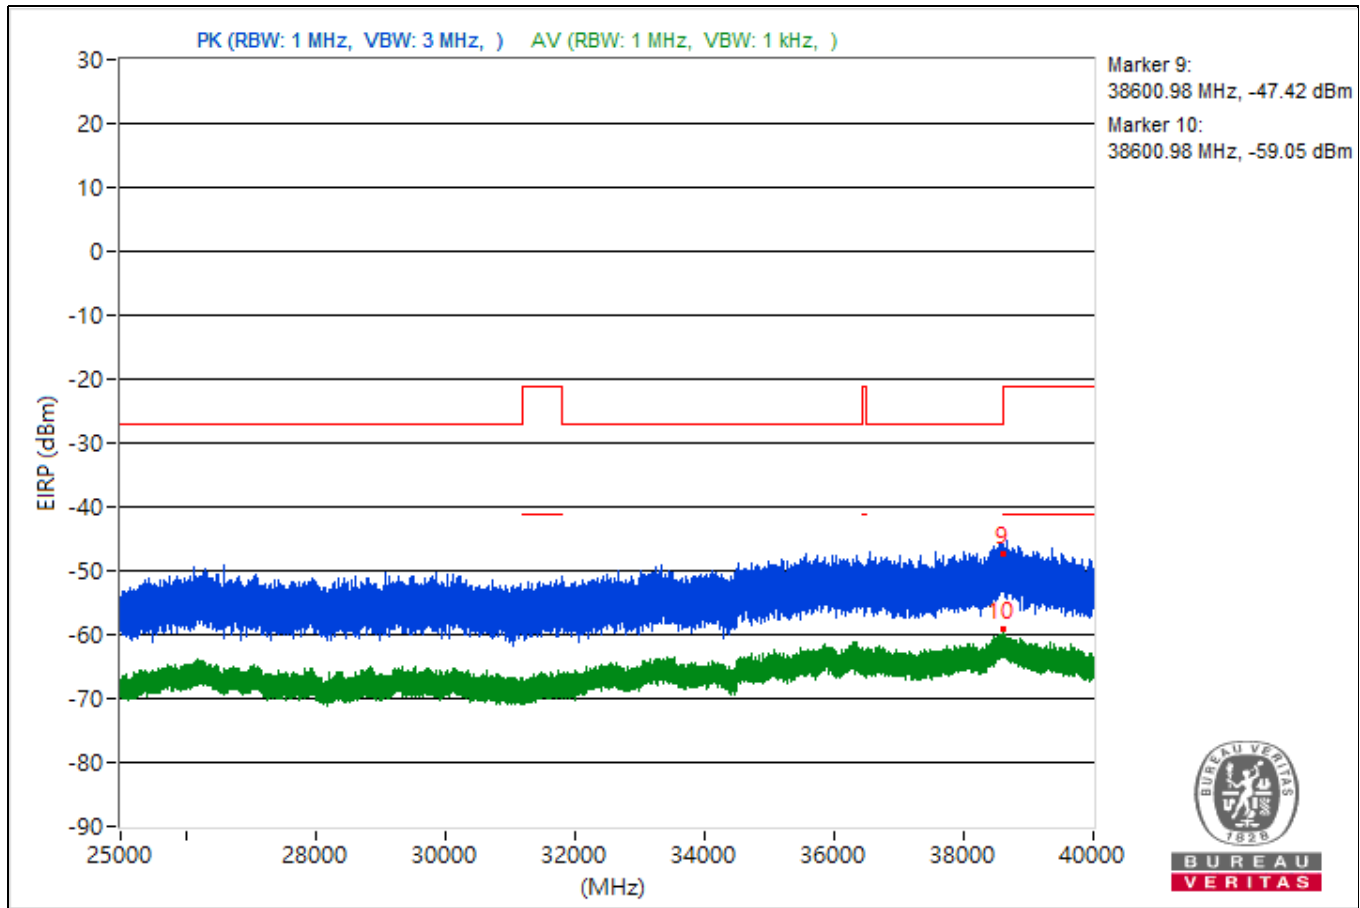


RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.28	56.97 PK	74	-17.03	-46.41	-46.05	4.92	-38.29
2	5099.28	49.97 AV	54	-4.03	-53.52	-52.94	4.92	-45.29
3	8476.36	46.6 PK	74	-27.4	-57.93	-55.57	4.92	-48.66
4	8476.36	42.31 AV	54	-11.69	-62.25	-59.84	4.92	-52.95
5	18934.8	47.4 PK	74	-26.6	-57.45	-54.59	4.92	-47.86
6	18934.8	43.83 AV	54	-10.17	-60.4	-58.52	4.92	-51.43
7	22175.6	47.84 PK	74	-26.16	-54.88	-55.88	4.92	-47.42
8	22175.6	44.82 AV	54	-9.18	-59.49	-57.48	4.92	-50.44
9	38615.11	44.13 PK	74	-29.87	-59.14	-58.98	4.92	-51.13
10	38615.11	35.61 AV	54	-18.39	-66.7	-68.68	4.92	-59.65

Note: Margin value = Emission Level - Limit value

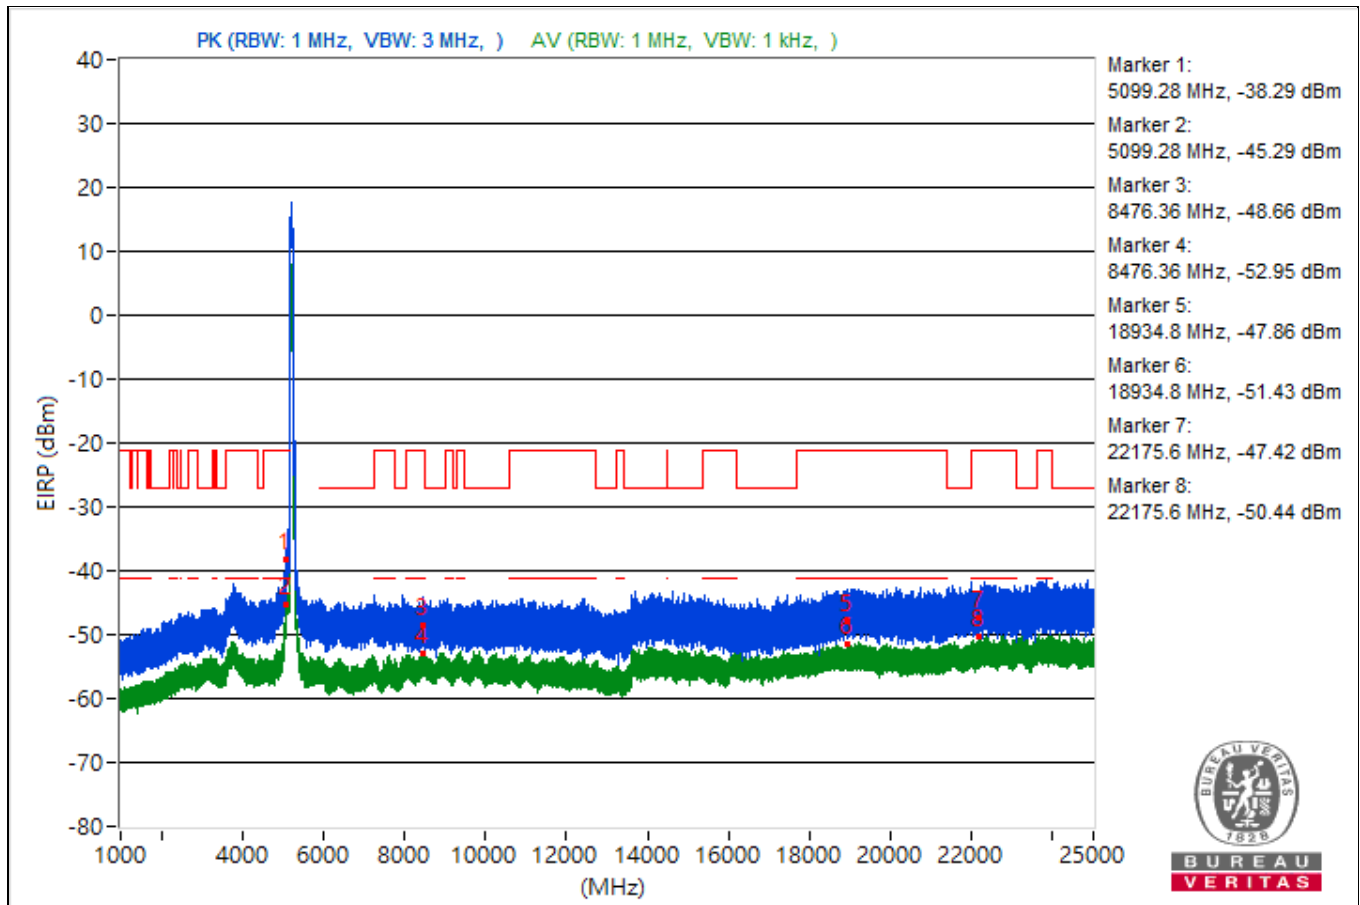


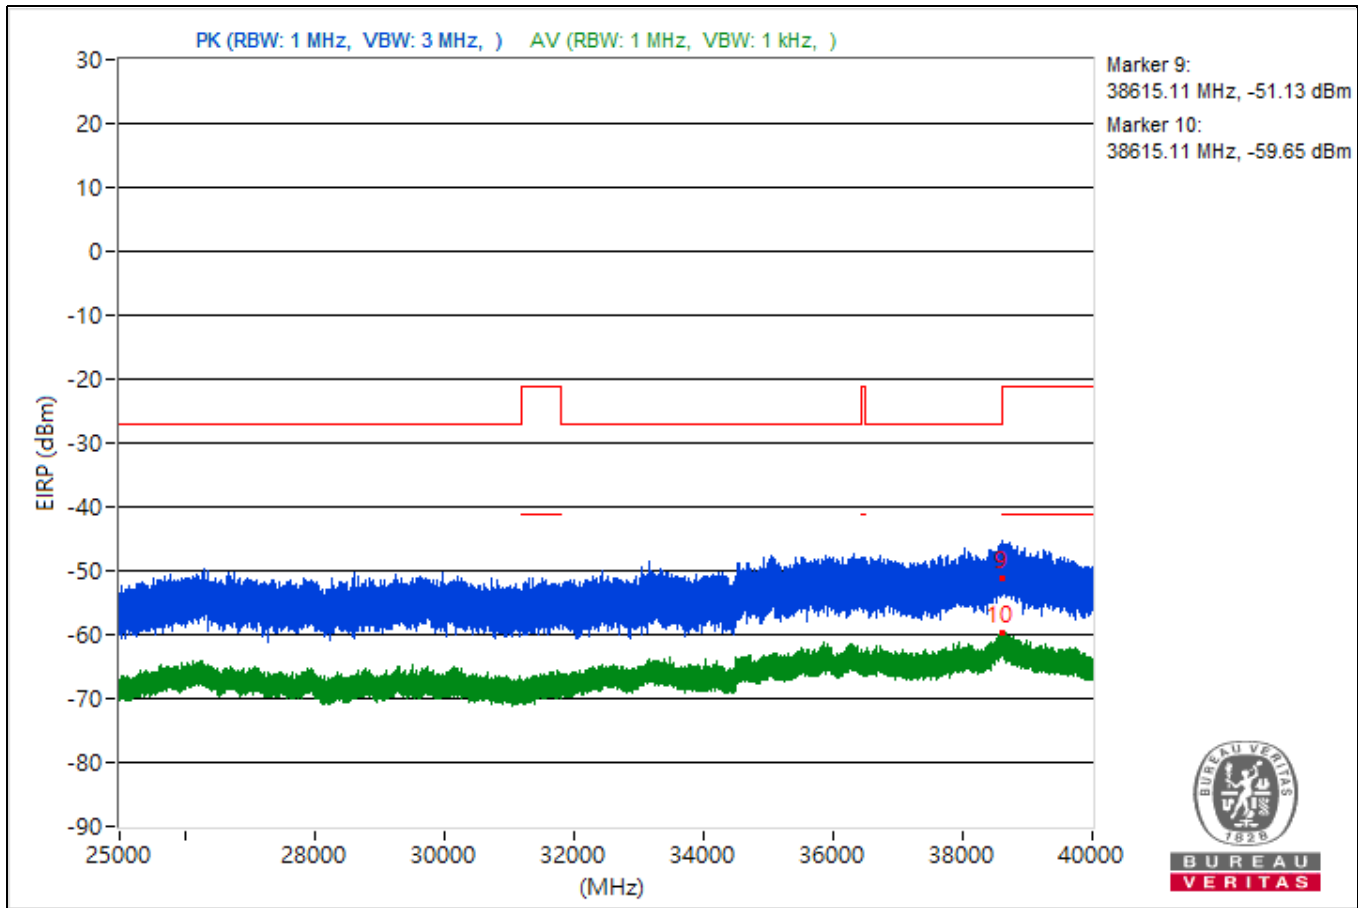


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.43	50.38 PK	74	-23.62	-53.31	-52.37	4.92	-44.88
2	5099.43	44.36 AV	54	-9.64	-59.67	-58.12	4.92	-50.9
3	9327.91	47.11 PK	74	-26.89	-56.78	-55.47	4.92	-48.15
4	9327.91	42.75 AV	54	-11.25	-62.05	-59.26	4.92	-52.51
5	18903.6	48.04 PK	74	-25.96	-54.13	-56.49	4.92	-47.22
6	18903.6	43.81 AV	54	-10.19	-58.33	-60.77	4.92	-51.45
7	22397.2	49.6 PK	74	-24.4	-53.42	-53.78	4.92	-45.66
8	22397.2	44.58 AV	54	-9.42	-60.38	-57.36	4.92	-50.68
9	38617.78	43.68 PK	74	-30.32	-60.49	-58.72	4.92	-51.58
10	38617.78	35.15 AV	54	-18.85	-70.22	-66.6	4.92	-60.11

Note: Margin value = Emission Level - Limit value

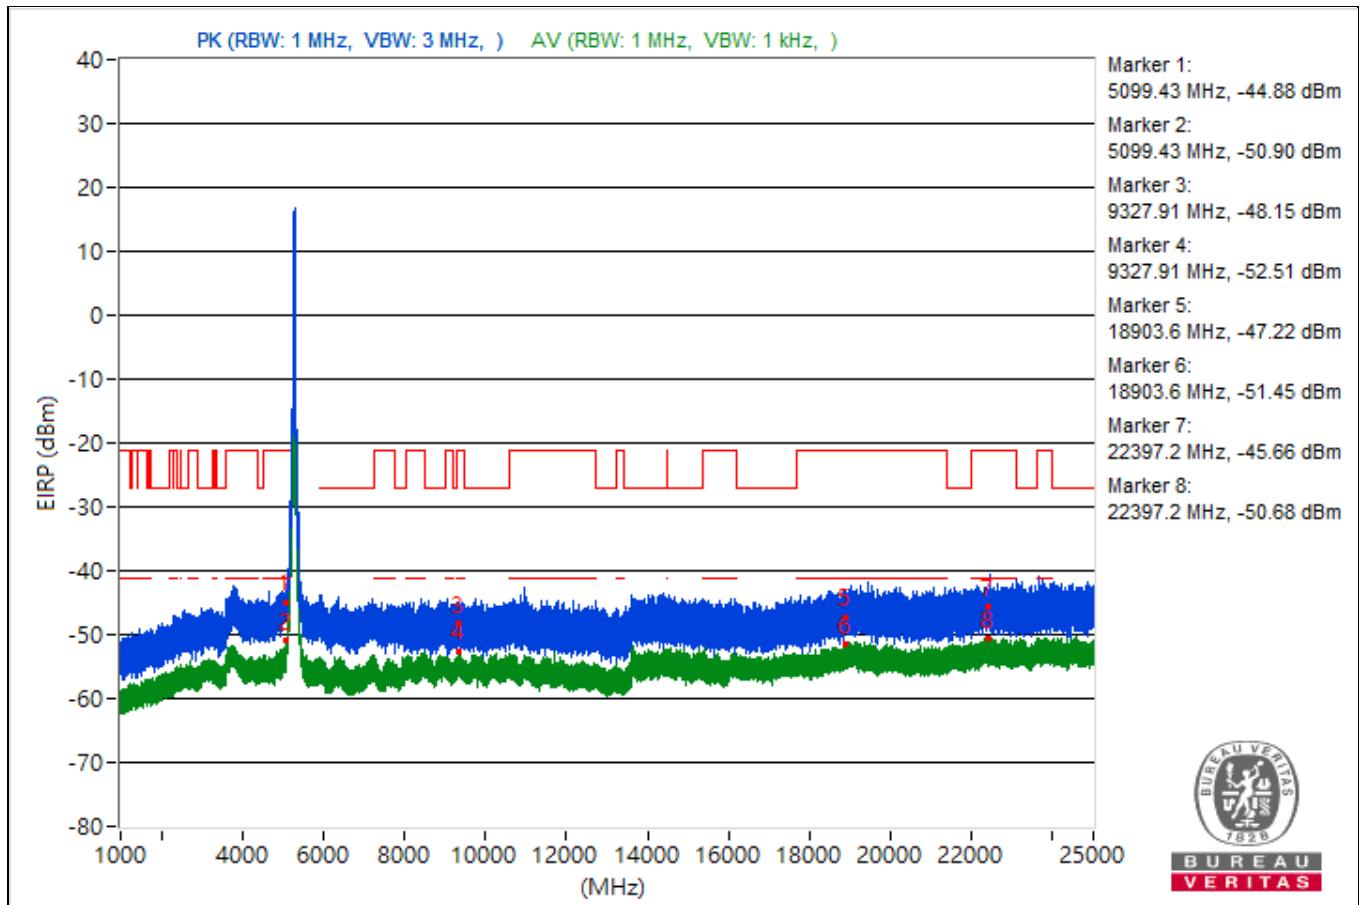


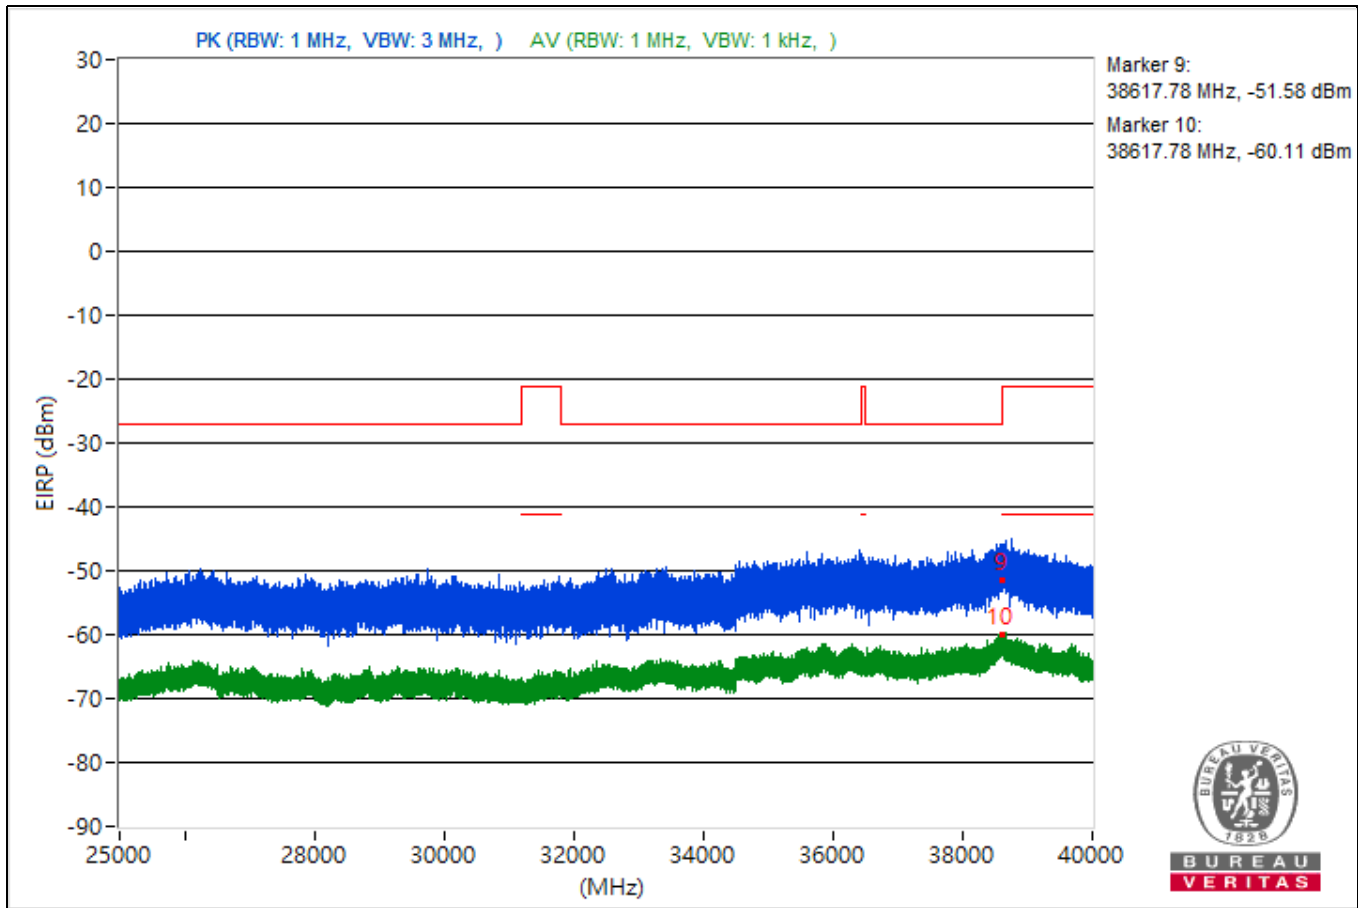


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3759.87	48.96 PK	74	-25.04	-55.79	-53.08	4.92	-46.3
2	3759.87	43.68 AV	54	-10.32	-58.45	-60.93	4.92	-51.58
3	9363.29	46.88 PK	74	-27.12	-57.38	-55.46	4.92	-48.38
4	9363.29	42.21 AV	54	-11.79	-62.71	-59.75	4.92	-53.05
5	18991.6	50.45 PK	74	-23.55	-52.71	-52.77	4.92	-44.81
6	18991.6	43.79 AV	54	-10.21	-62.14	-57.74	4.92	-51.47
7	23614.4	49.99 PK	74	-24.01	-51.96	-54.93	4.92	-45.27
8	23614.4	44.4 AV	54	-9.6	-61.37	-57.19	4.92	-50.86
9	38637.07	47.27 PK	74	-26.73	-55.34	-56.58	4.92	-47.99
10	38637.07	34.94 AV	54	-19.06	-66.81	-70.42	4.92	-60.32

Note: Margin value = Emission Level - Limit value

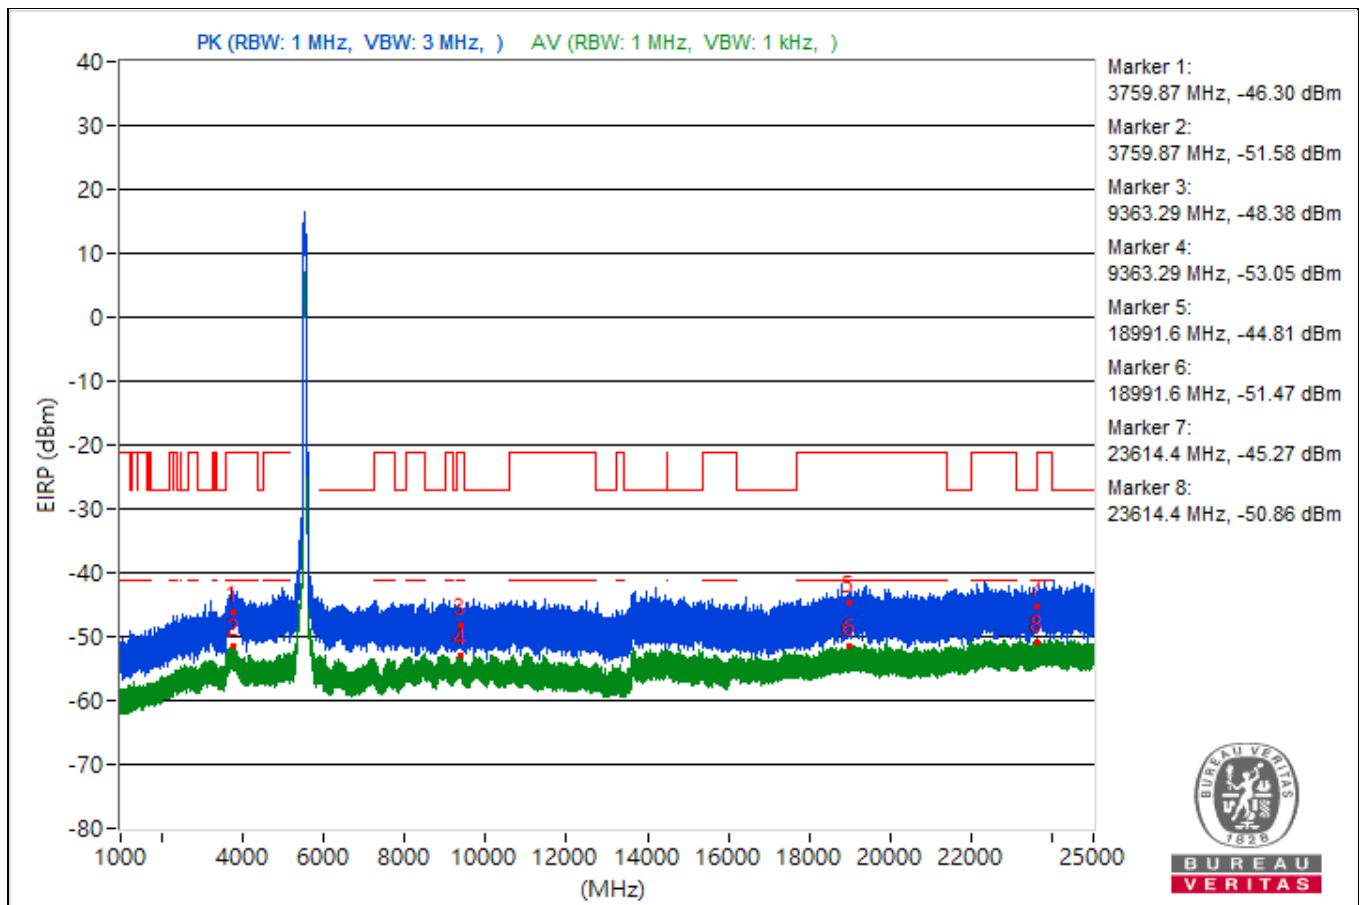


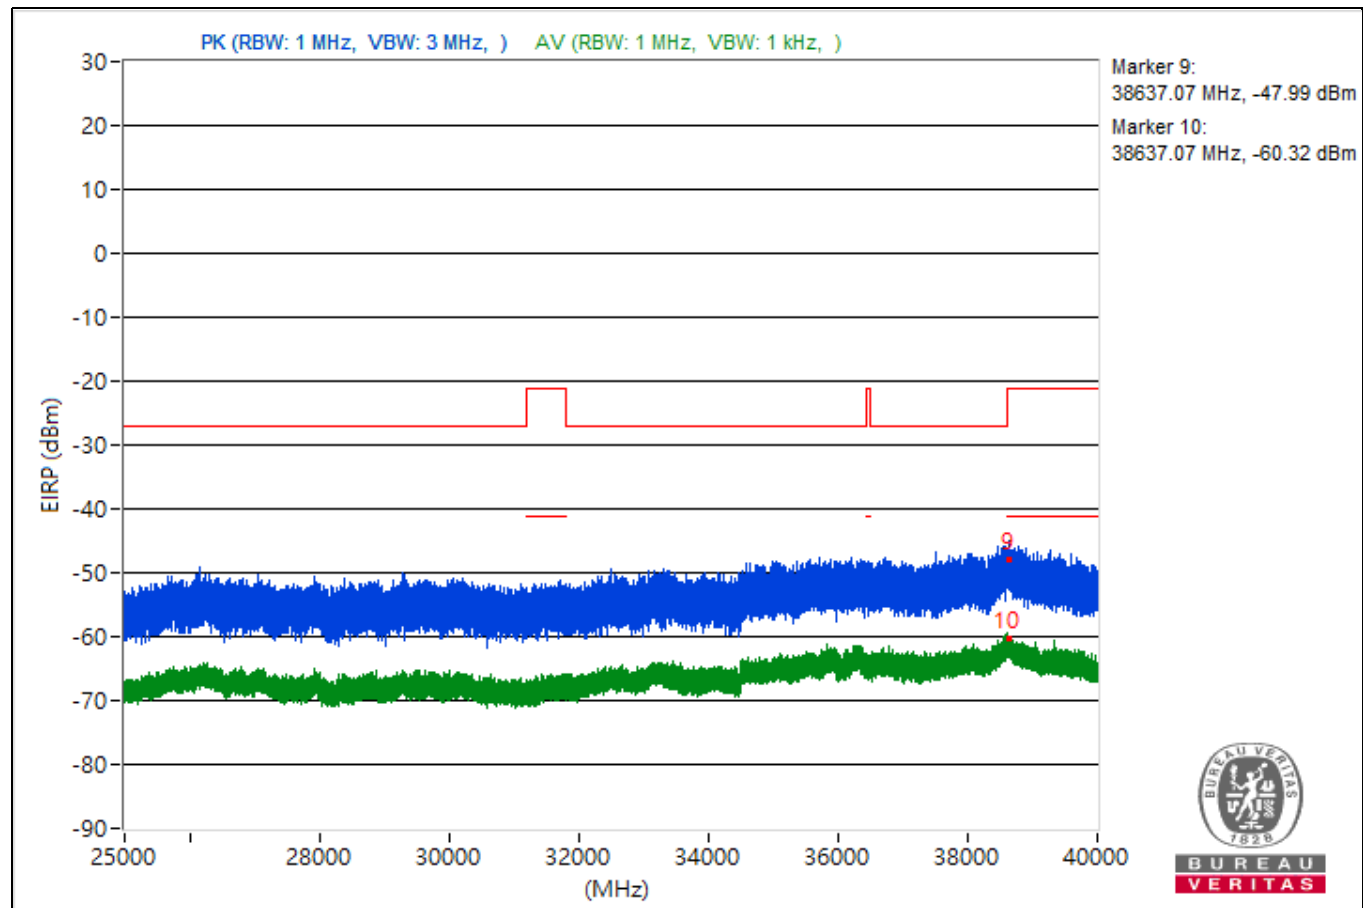


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3710.63	48.25 PK	74	-25.75	-54.61	-55.29	4.92	-47.01
2	3710.63	43.76 AV	54	-10.24	-60.79	-58.4	4.92	-51.5
3	8438.4	47.42 PK	74	-26.58	-54.93	-56.82	4.92	-47.84
4	8438.4	42.72 AV	54	-11.28	-62.77	-58.98	4.92	-52.54
5	18699.2	47.35 PK	74	-26.65	-55.21	-56.56	4.92	-47.91
6	18699.2	43.29 AV	54	-10.71	-58.64	-61.69	4.92	-51.97
7	23813.2	49.01 PK	74	-24.99	-54.82	-53.62	4.92	-46.25
8	23813.2	45.83 AV	54	-8.17	-56.47	-58.48	4.92	-49.43
9	38609.6	46.43 PK	74	-27.57	-57.72	-55.98	4.92	-48.83
10	38609.6	35.39 AV	54	-18.61	-66.84	-69.03	4.92	-59.87

Note: Margin value = Emission Level - Limit value

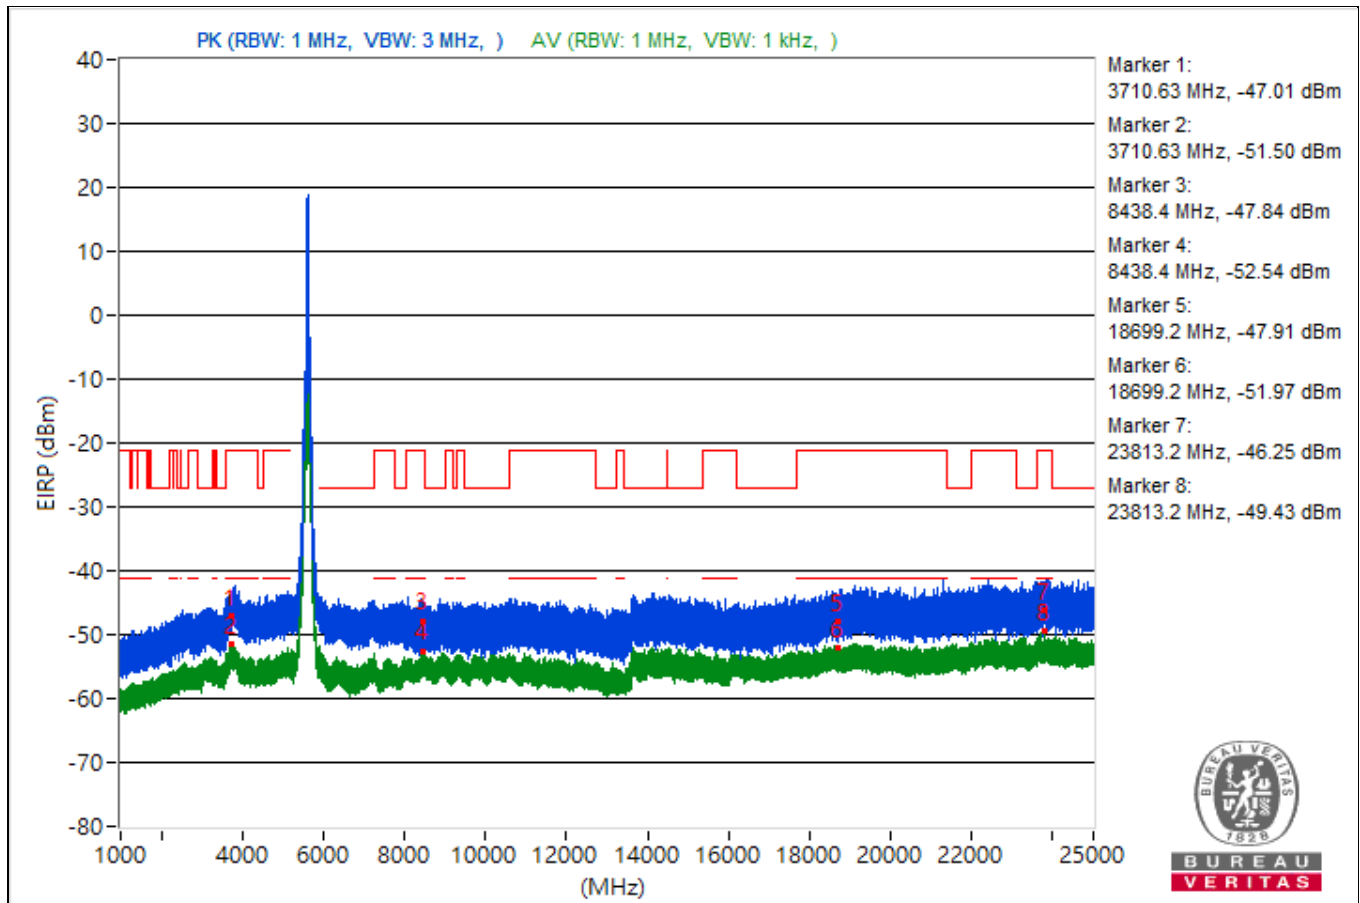


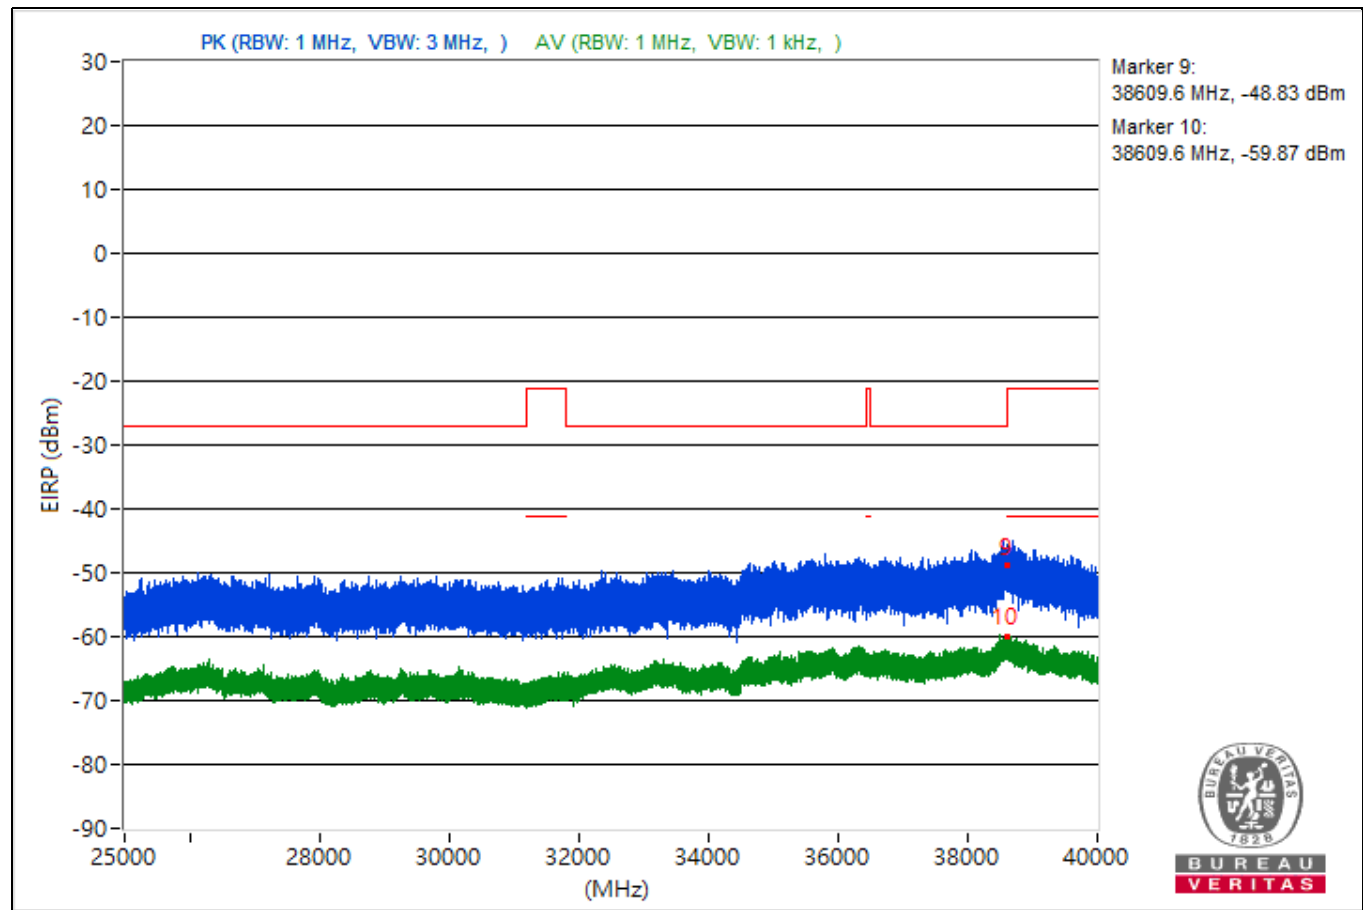


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.56	51.3 PK	74	-22.7	-51.07	-52.9	4.92	-43.96
2	3822.56	43.71 AV	54	-10.29	-60.6	-58.6	4.92	-51.55
3	9022.49	46.97 PK	74	-27.03	-55.23	-57.5	4.92	-48.29
4	9022.49	42.54 AV	54	-11.46	-61.98	-59.63	4.92	-52.72
5	18743.8	46.65 PK	74	-27.35	-56.28	-56.83	4.92	-48.61
6	18743.8	43.29 AV	54	-10.71	-58.49	-62.01	4.92	-51.97
7	23959.1	49.34 PK	74	-24.66	-52.44	-55.97	4.92	-45.92
8	23959.1	44.87 AV	54	-9.13	-60.35	-56.93	4.92	-50.39
9	38606.31	45.47 PK	74	-28.53	-57.19	-58.33	4.92	-49.79
10	38606.31	35.2 AV	54	-18.8	-66.43	-70.44	4.92	-60.06

Note: Margin value = Emission Level - Limit value

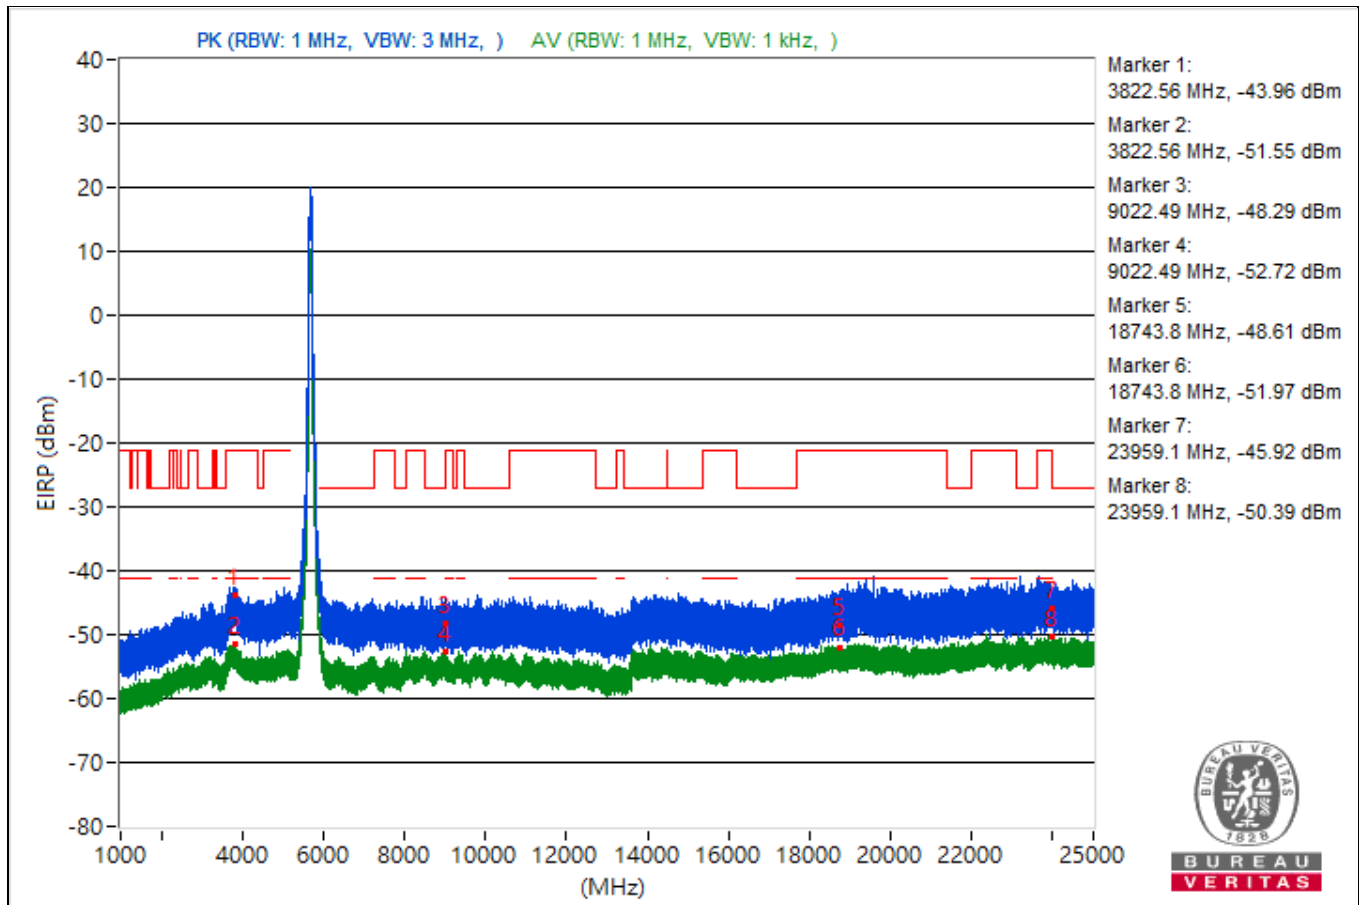


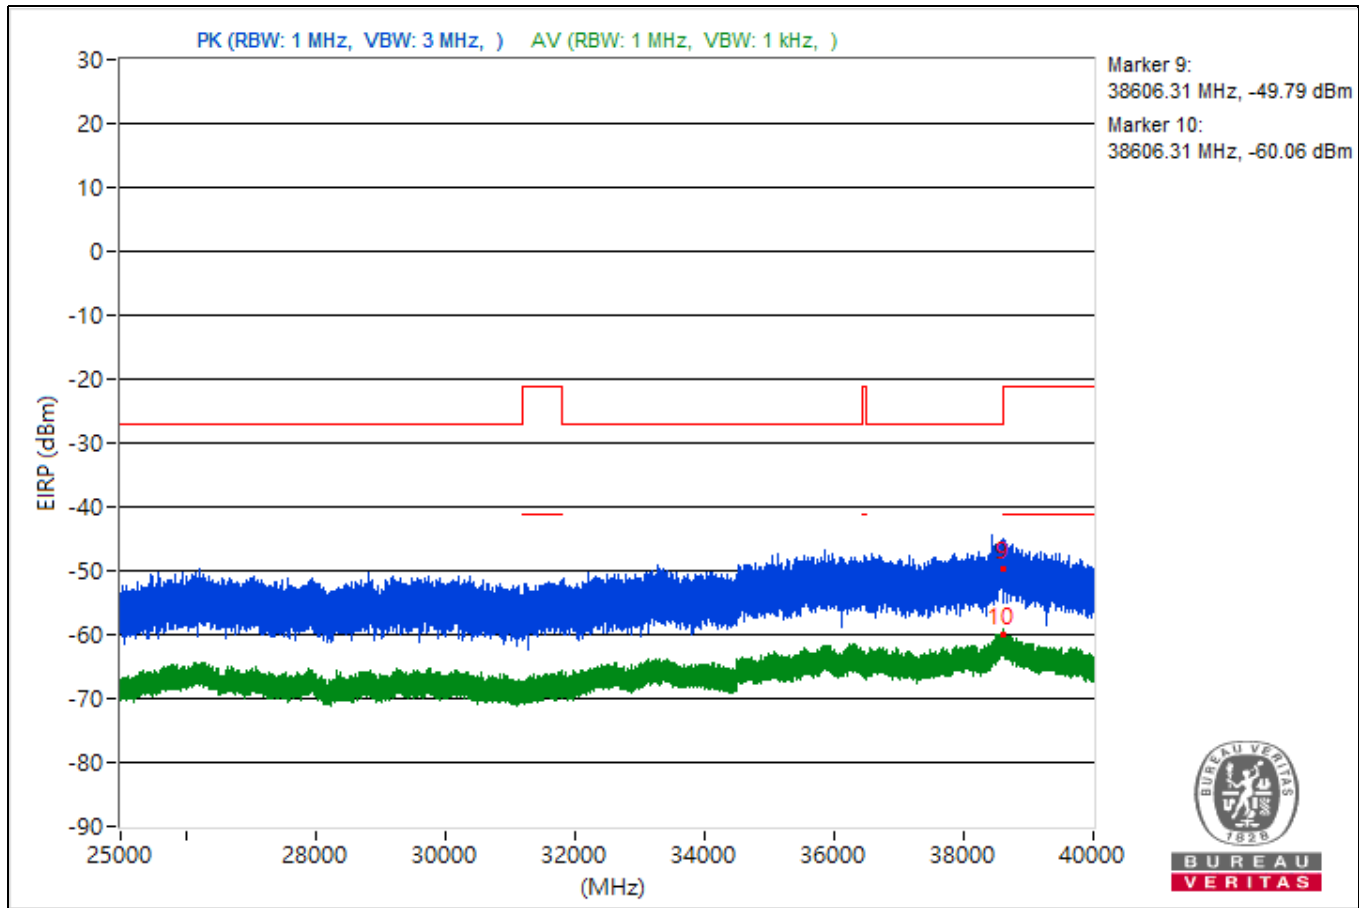


RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.97	50.49 PK	74	-23.51	-53.6	-51.96	4.92	-44.77
2	3754.97	43.83 AV	54	-10.17	-60.81	-58.28	4.92	-51.43
3	9331.73	46.33 PK	74	-27.67	-55.76	-58.34	4.92	-48.93
4	9331.73	42.91 AV	54	-11.09	-61.01	-59.66	4.92	-52.35
5	18927.4	48.28 PK	74	-25.72	-56.8	-53.6	4.92	-46.98
6	18927.4	43.4 AV	54	-10.6	-62.7	-58.07	4.92	-51.86
7	23628.4	49.76 PK	74	-24.24	-54.48	-52.59	4.92	-45.5
8	23628.4	45.2 AV	54	-8.8	-58.74	-57.35	4.92	-50.06
9	38658.22	47.68 PK	74	-26.32	-53.87	-58.17	4.92	-47.58
10	38658.22	35.62 AV	54	-18.38	-69.4	-66.29	4.92	-59.64

Note: Margin value = Emission Level - Limit value

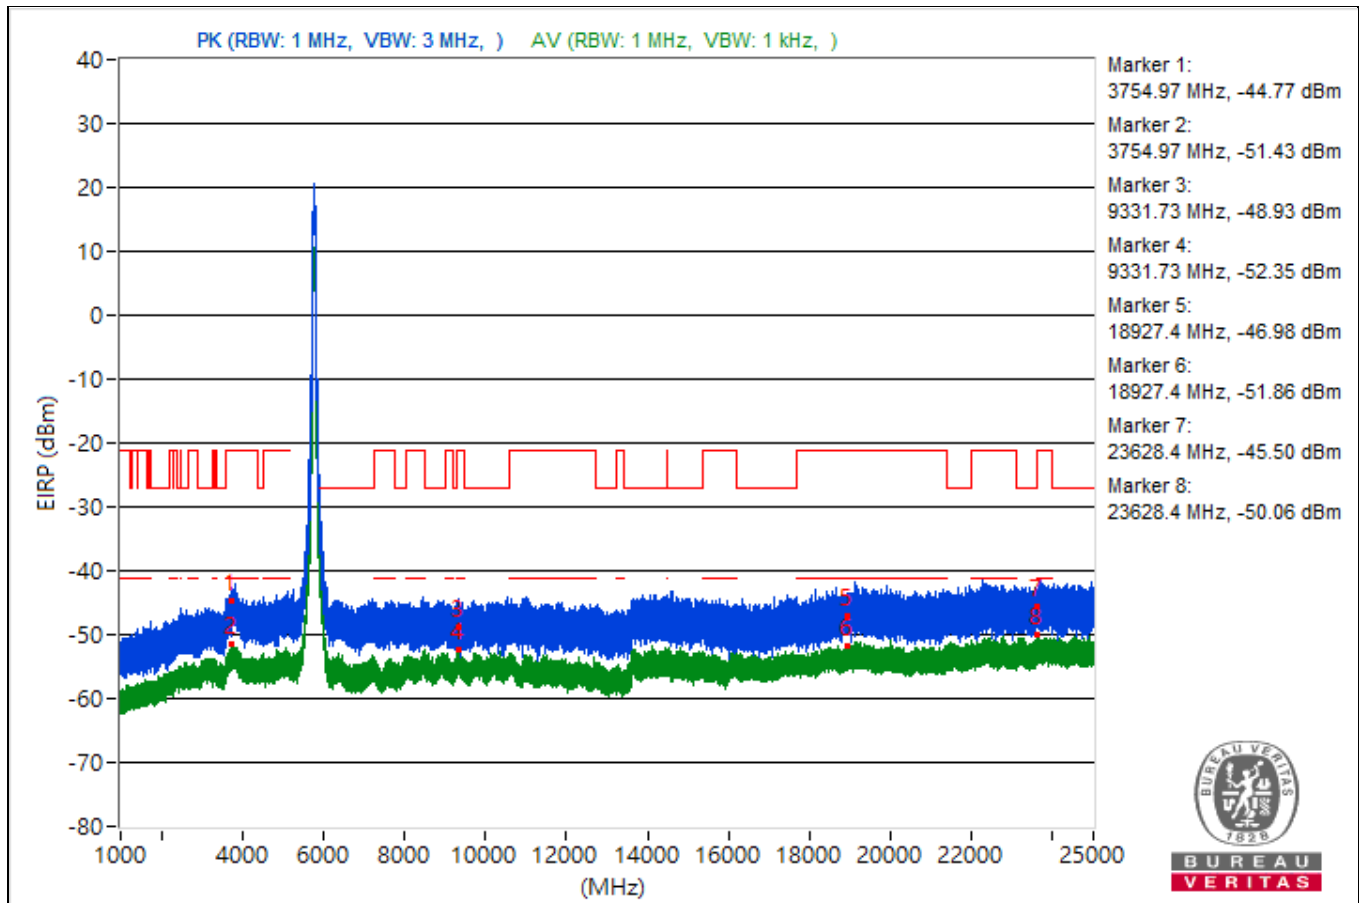


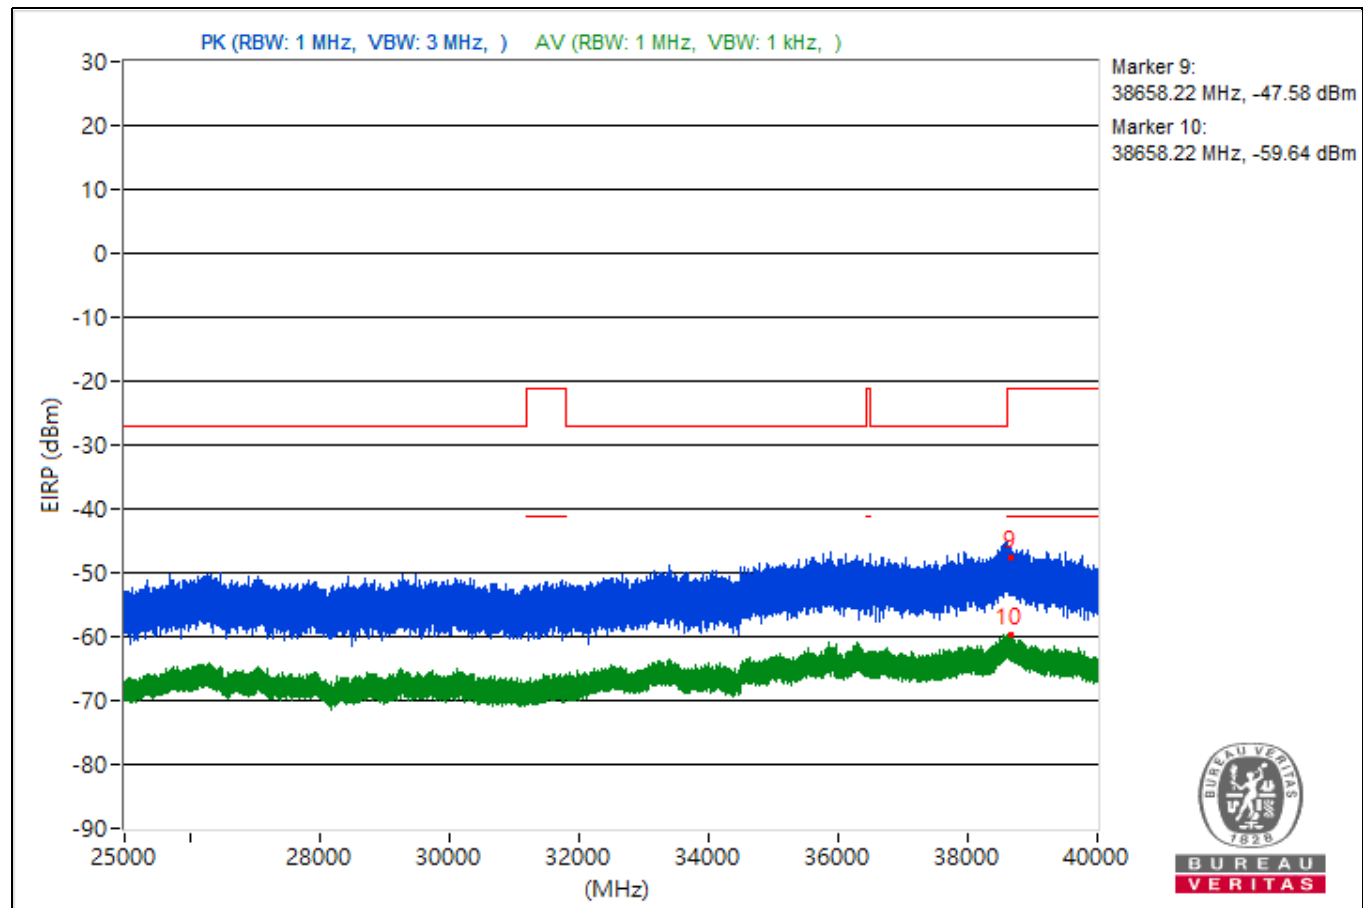


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5081.08	57.32 PK	74	-16.68	-46.03	-45.72	4.92	-37.94
2	5081.08	51.56 AV	54	-2.44	-51.13	-52.19	4.92	-43.7
3	9330.04	47.85 PK	74	-26.15	-54.84	-55.9	4.92	-47.41
4	9330.04	41.98 AV	54	-12.02	-63.15	-59.88	4.92	-53.28
5	18995	49.03 PK	74	-24.97	-53.93	-54.4	4.92	-46.23
6	18995	44.17 AV	54	-9.83	-58.15	-60.11	4.92	-51.09
7	22803	49.43 PK	74	-24.57	-52.32	-55.93	4.92	-45.83
8	22803	44.73 AV	54	-9.27	-59.68	-57.51	4.92	-50.53
9	38603.82	45.11 PK	74	-28.89	-59.18	-57.2	4.92	-50.15
10	38603.82	36.21 AV	54	-17.79	-66.54	-67.48	4.92	-59.05

Note: Margin value = Emission Level - Limit value

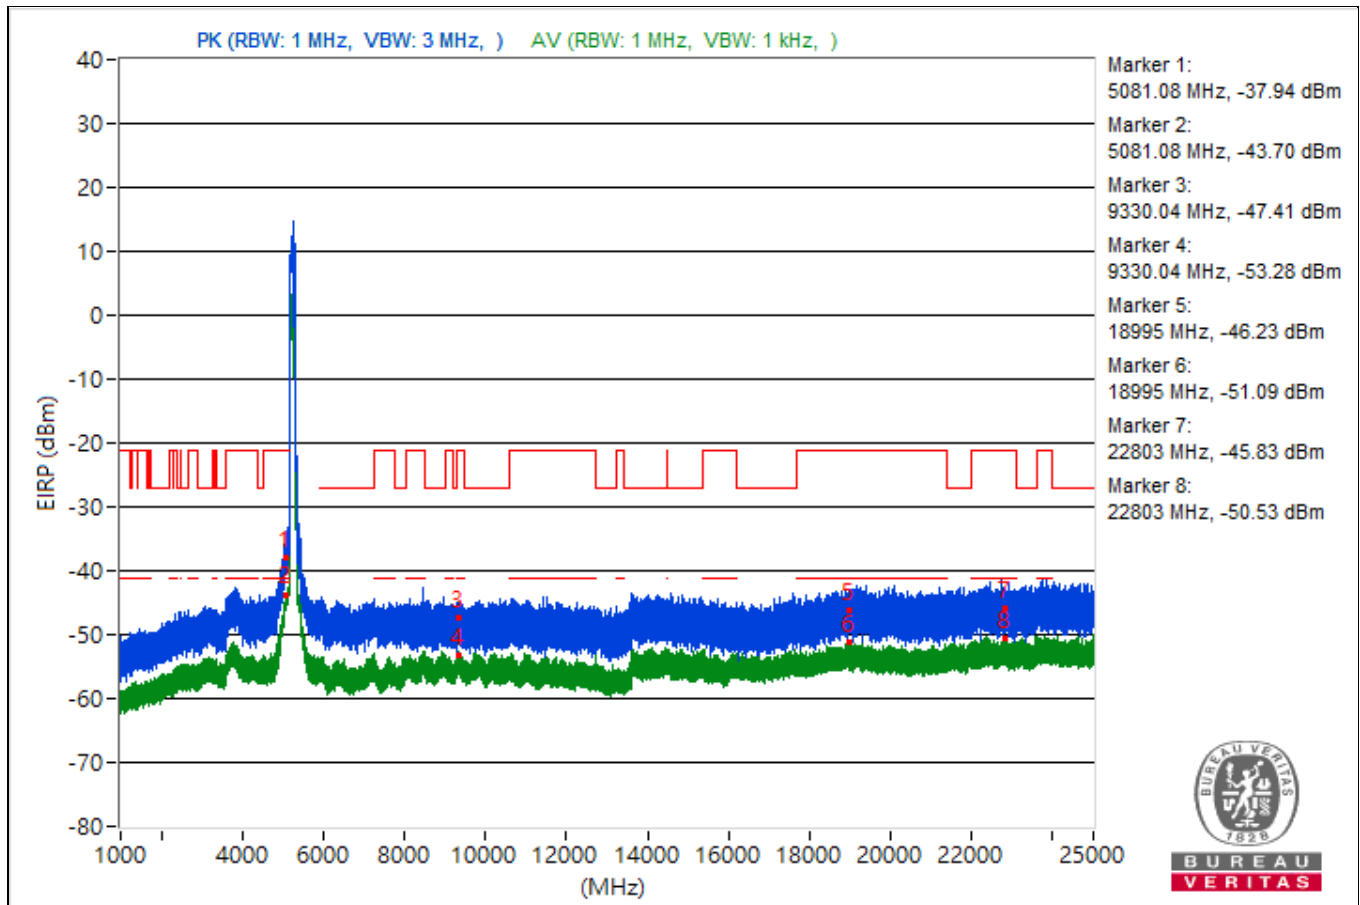


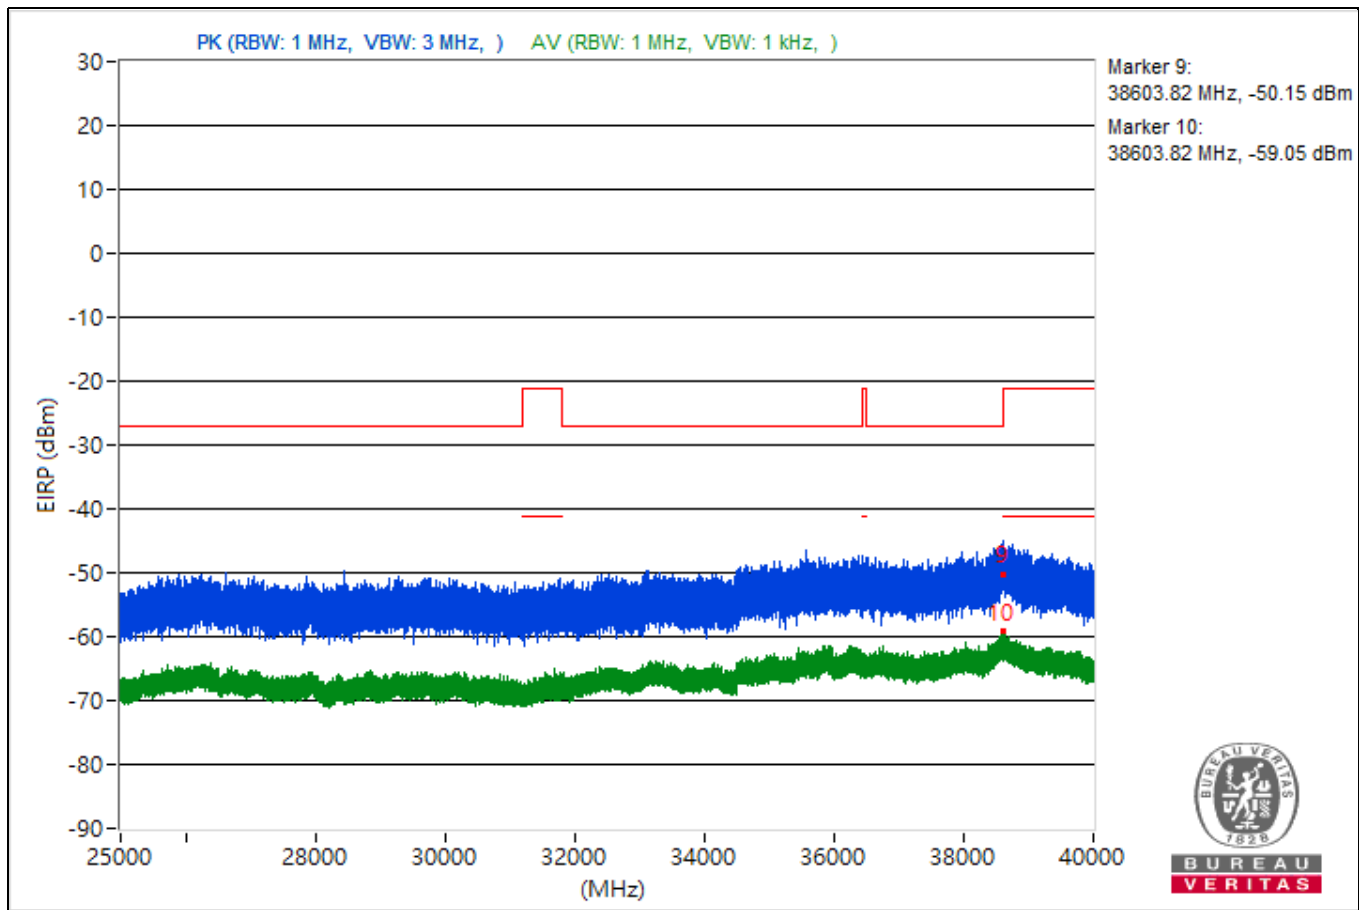


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3762.98	50.42 PK	74	-23.58	-53.02	-52.52	4.92	-44.84
2	3762.98	43.44 AV	54	-10.56	-61.88	-58.32	4.92	-51.82
3	9382.67	48.17 PK	74	-25.83	-55.13	-54.91	4.92	-47.09
4	9382.67	41.81 AV	54	-12.19	-60.03	-63.37	4.92	-53.45
5	18969.8	50.13 PK	74	-23.87	-51.79	-54.86	4.92	-45.13
6	18969.8	43.58 AV	54	-10.42	-61.14	-58.49	4.92	-51.68
7	23963.8	50.34 PK	74	-23.66	-51.01	-56.09	4.92	-44.92
8	23963.8	44.9 AV	54	-9.1	-60.14	-56.99	4.92	-50.36
9	38602.84	48.63 PK	74	-25.37	-55.64	-53.7	4.92	-46.63
10	38602.84	35.86 AV	54	-18.14	-67.83	-66.87	4.92	-59.4

Note: Margin value = Emission Level - Limit value

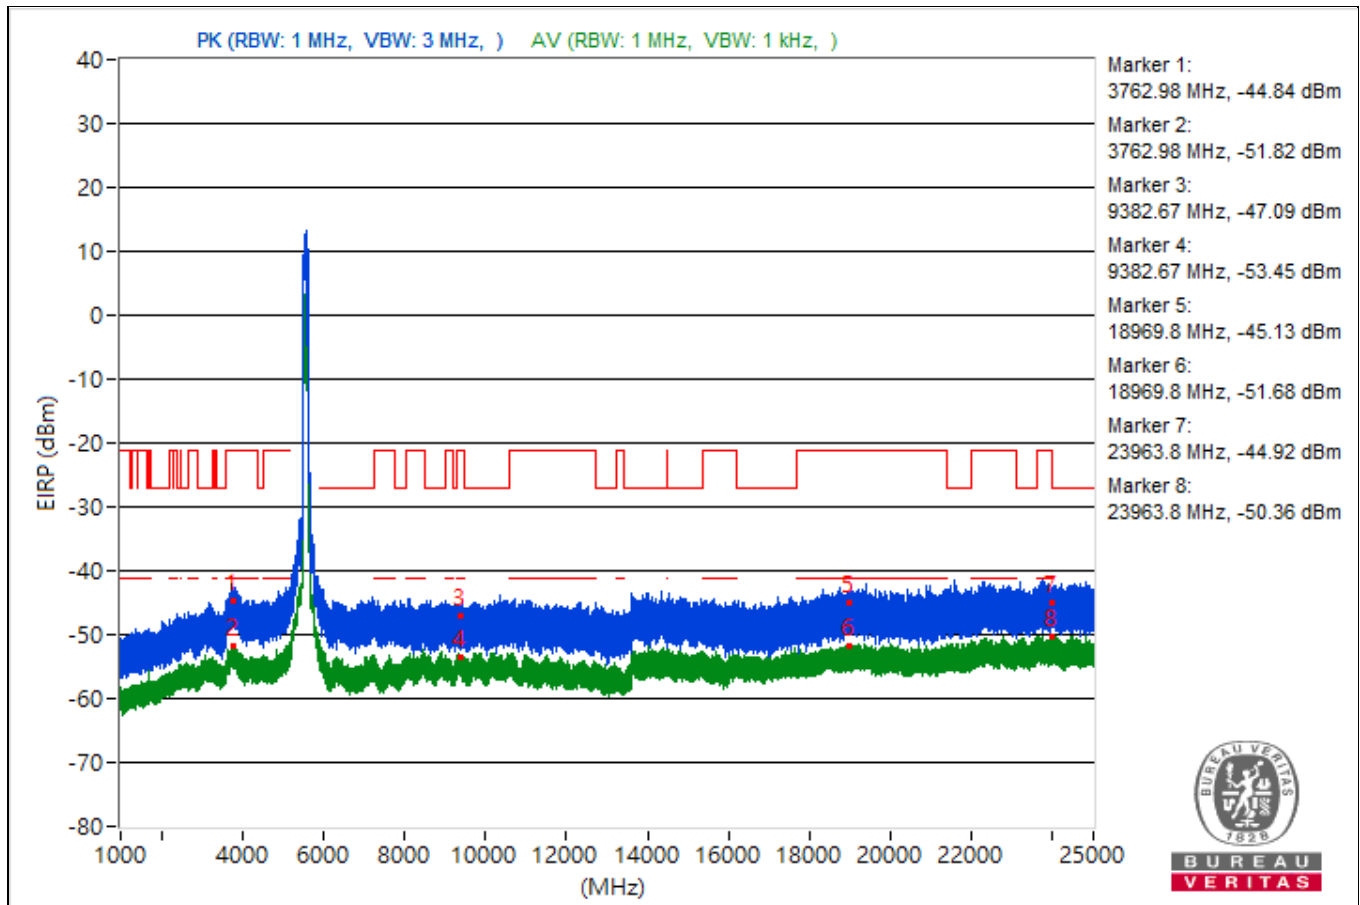


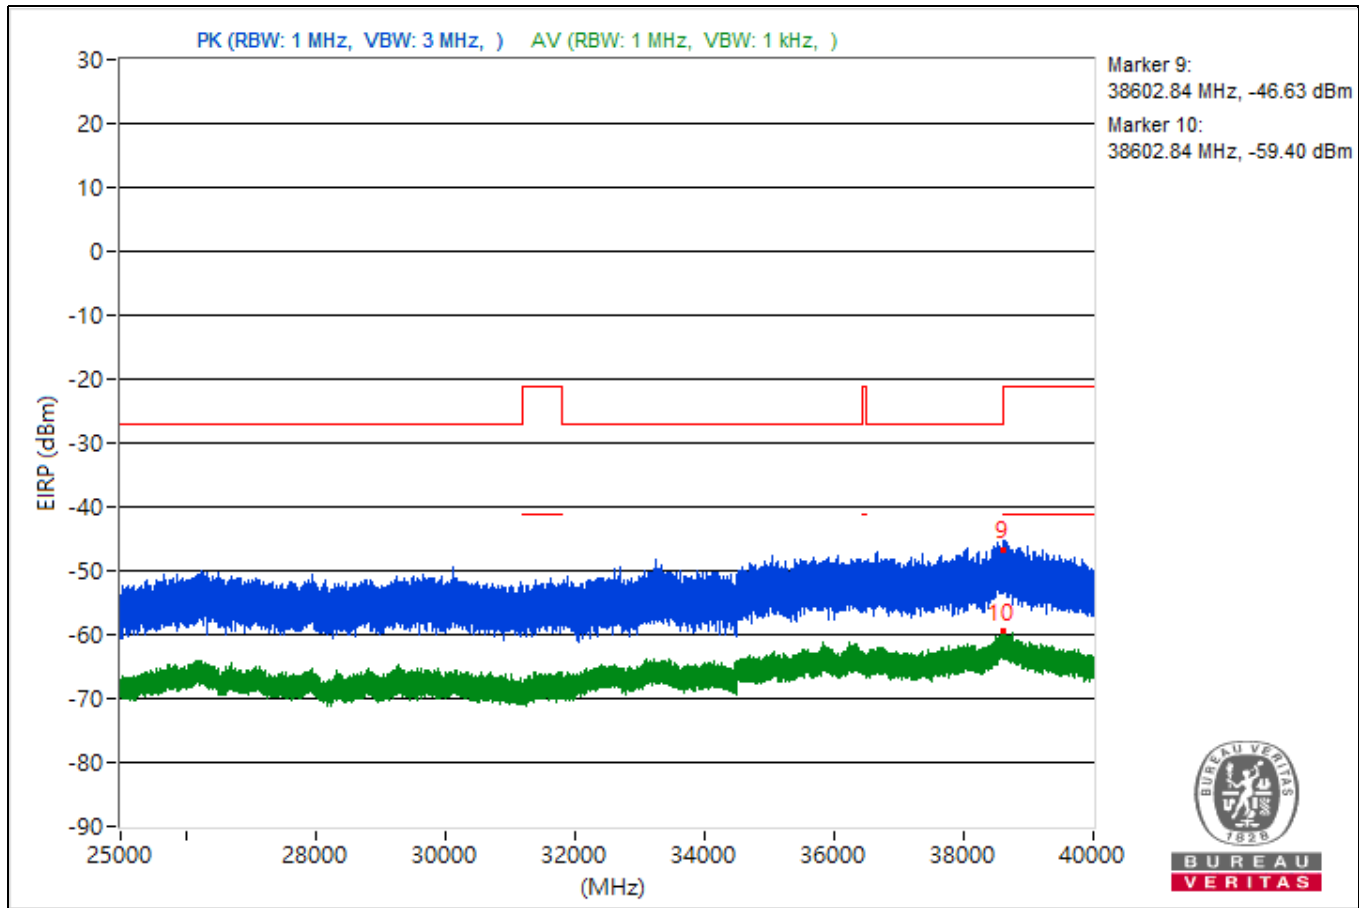


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5051.91	49.98 PK	74	-24.02	-52.8	-53.68	4.92	-45.28
2	5051.91	45.42 AV	54	-8.58	-57.51	-58.06	4.92	-49.84
3	9337.6	45.28 PK	74	-28.72	-57.79	-58.04	4.92	-49.98
4	9337.6	40.67 AV	54	-13.33	-63.93	-61.46	4.92	-54.59
5	18984.5	45.8 PK	74	-28.2	-58.07	-56.8	4.92	-49.46
6	18984.5	42.2 AV	54	-11.8	-60.29	-61.84	4.92	-53.06
7	23756	46.34 PK	74	-27.66	-54.82	-60.79	4.92	-48.92
8	23756	43.58 AV	54	-10.42	-58.26	-61.6	4.92	-51.68
9	38613.51	42.03 PK	74	-31.97	-62.64	-60.05	4.92	-53.23
10	38613.51	33.03 AV	54	-20.97	-72.07	-68.84	4.92	-62.23

Note: Margin value = Emission Level - Limit value

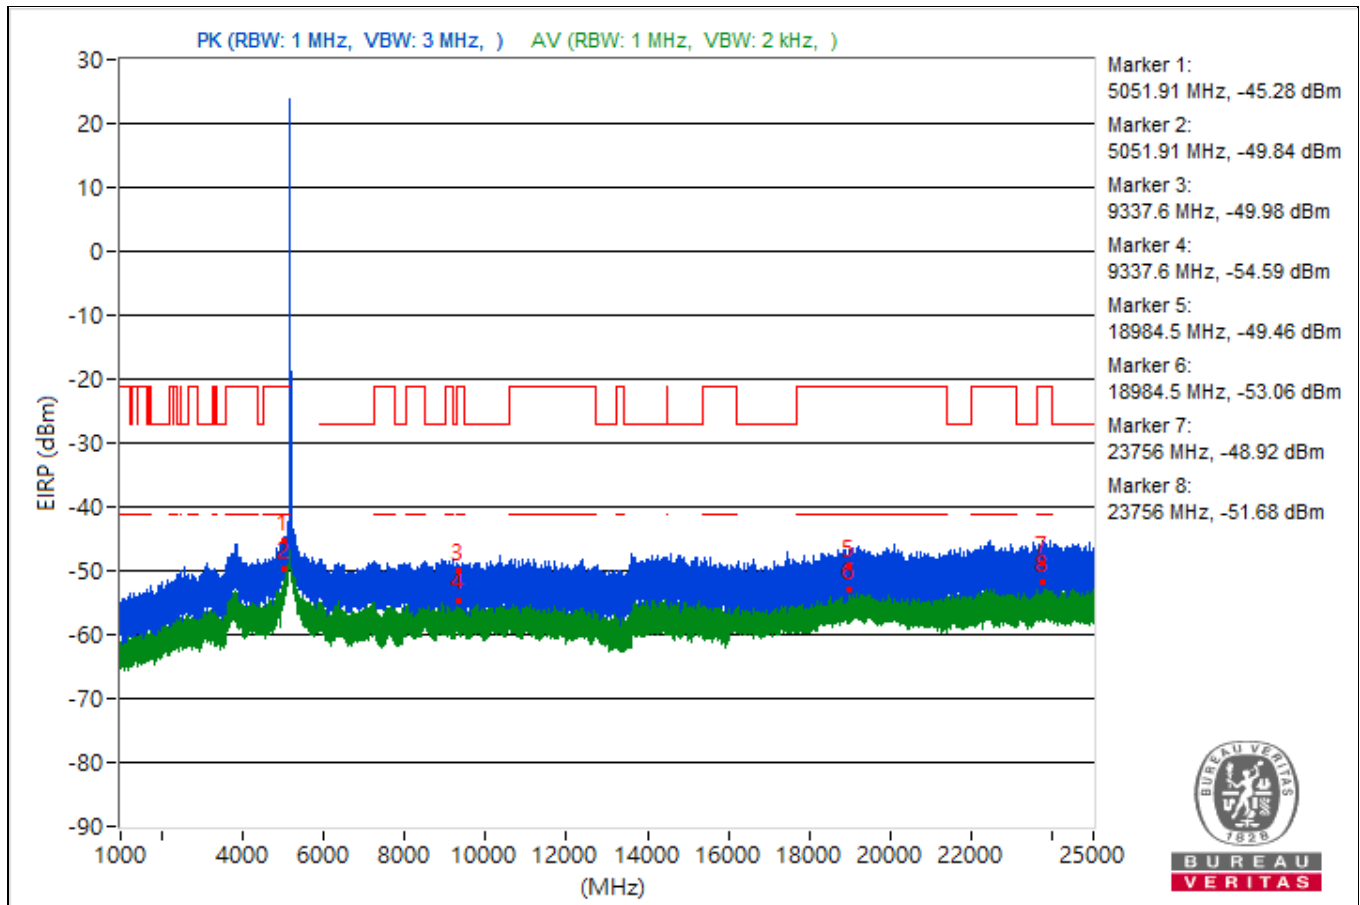


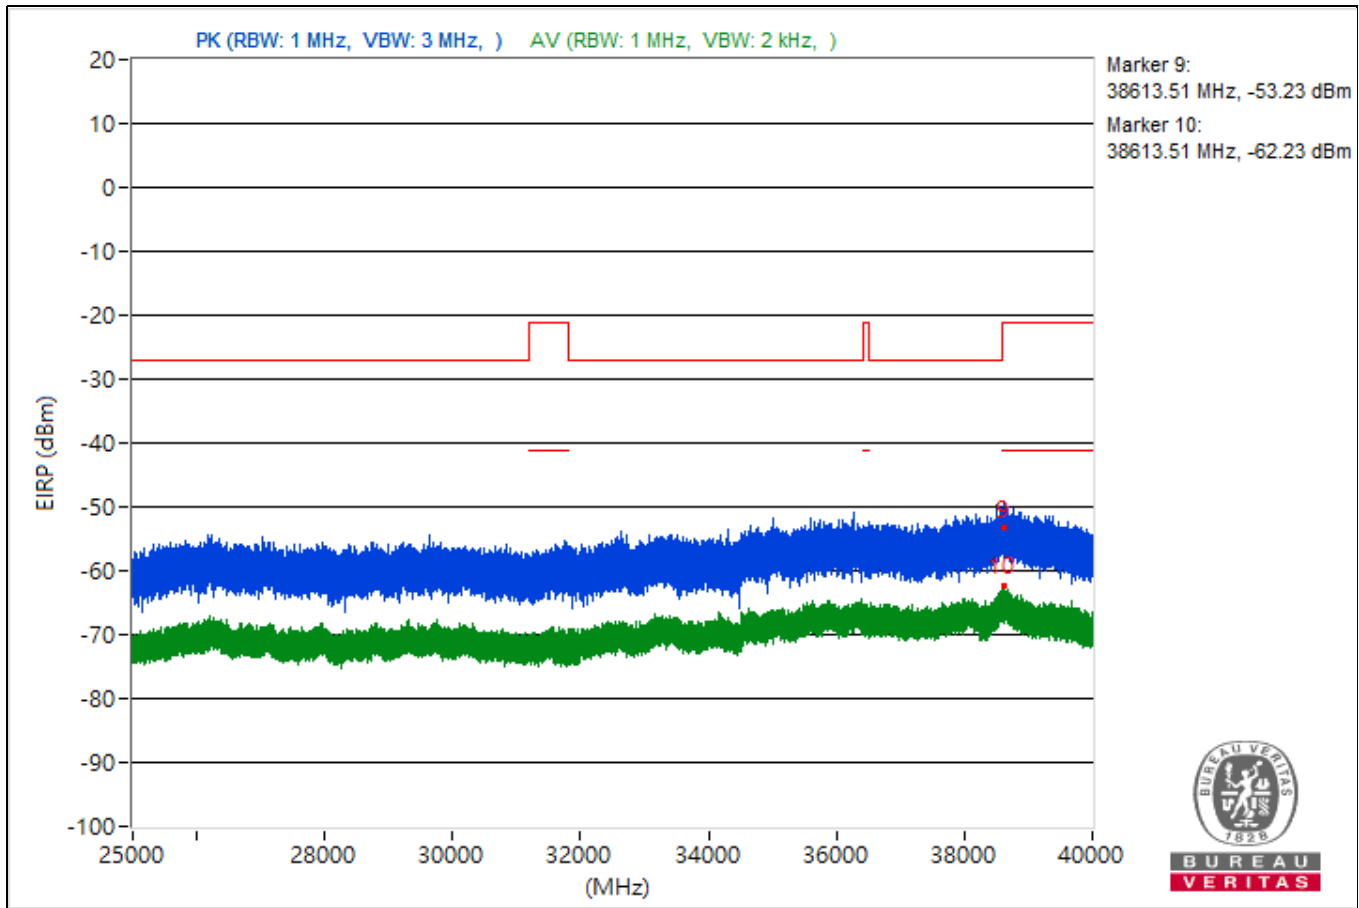


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5094.69	46.9 PK	74	-27.1	-56.45	-56.14	4.92	-48.36
2	5094.69	43.39 AV	54	-10.61	-58.96	-60.84	4.92	-51.87
3	8413.78	41.5 PK	74	-32.5	-62.44	-61.06	4.92	-53.76
4	8413.78	40.37 AV	54	-13.63	-63.95	-61.93	4.92	-54.89
5	18891	42.98 PK	74	-31.02	-59.24	-61.47	4.92	-52.28
6	18891	41.65 AV	54	-12.35	-64.08	-59.94	4.92	-53.61
7	22737.2	44.1 PK	74	-29.9	-60.74	-57.89	4.92	-51.16
8	22737.2	43.29 AV	54	-10.71	-58.82	-61.33	4.92	-51.97
9	38618.58	42.03 PK	74	-31.97	-59.92	-62.91	4.92	-53.23
10	38618.58	31.5 AV	54	-22.5	-74.91	-69.87	4.92	-63.76

Note: Margin value = Emission Level - Limit value

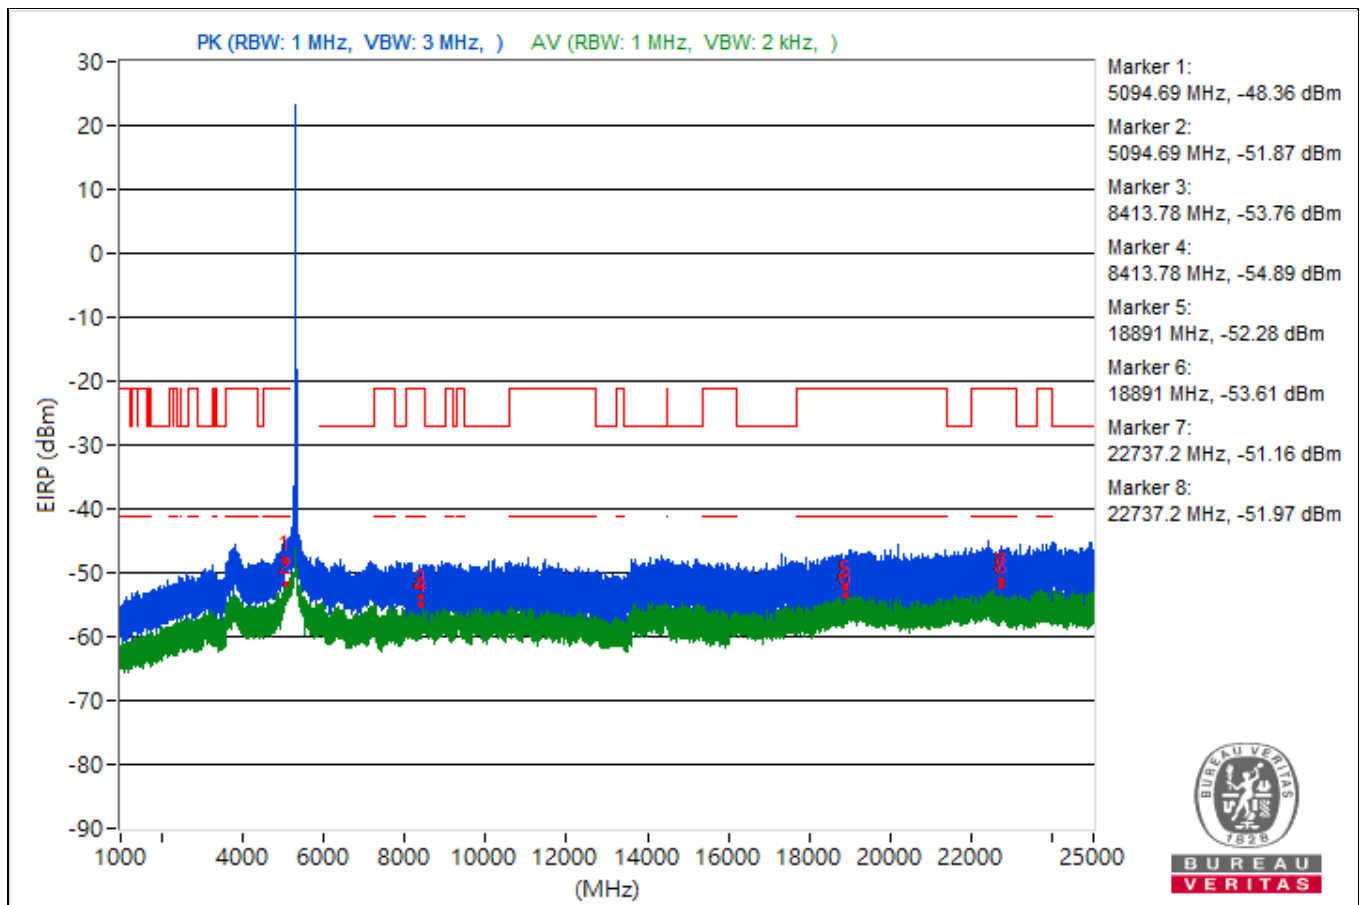


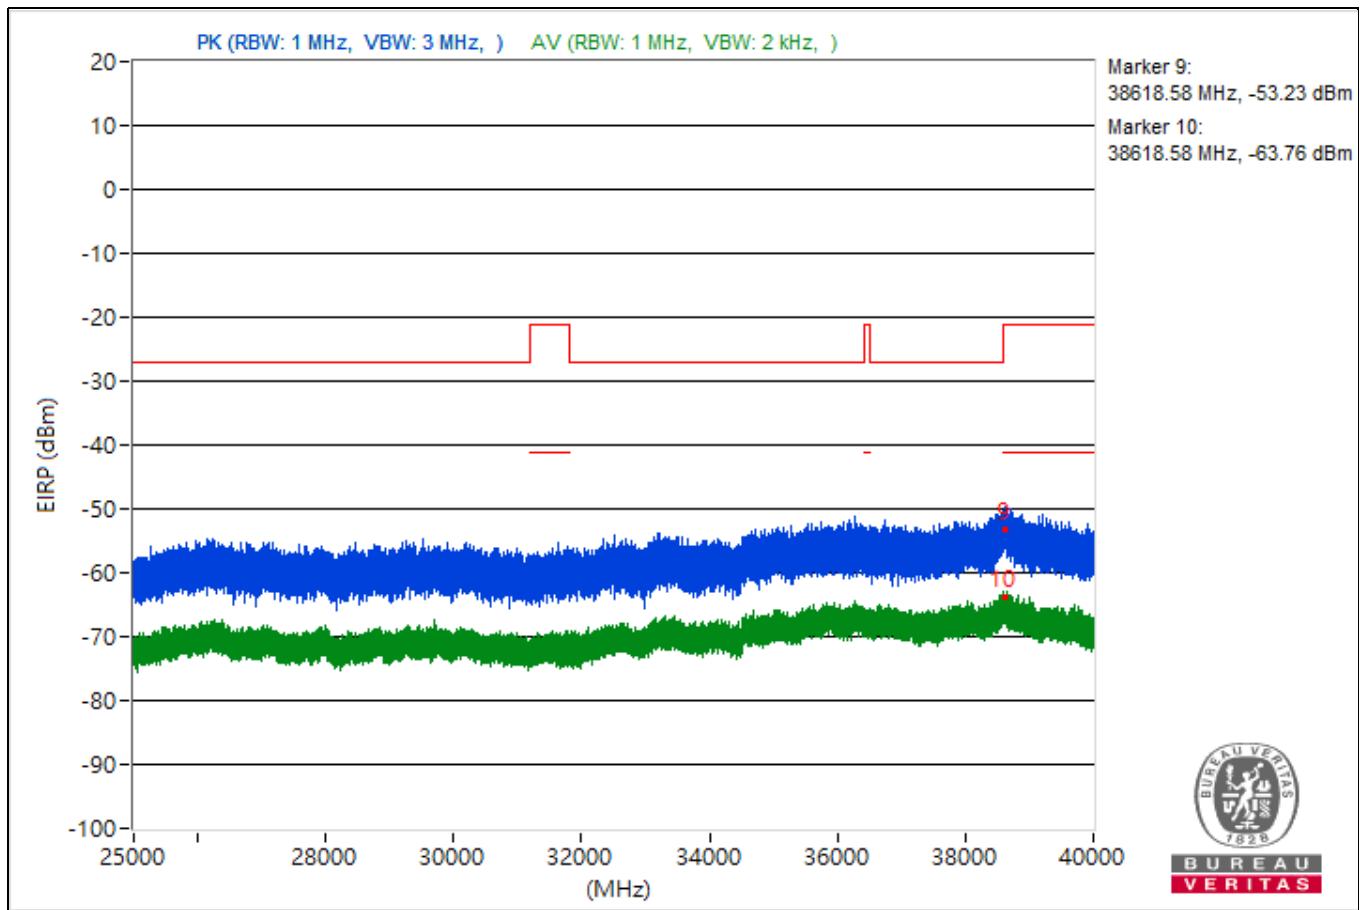


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3702.54	44.48 PK	74	-29.52	-57.96	-59.62	4.92	-50.78
2	3702.54	41.65 AV	54	-12.35	-63.56	-60.17	4.92	-53.61
3	10687.82	42.4 PK	74	-31.6	-61.5	-60.18	4.92	-52.86
4	10687.82	40.27 AV	54	-13.73	-61.3	-65.53	4.92	-54.99
5	18933.7	46.22 PK	74	-27.78	-60.1	-55.16	4.92	-49.04
6	18933.7	41.91 AV	54	-12.09	-60.18	-62.75	4.92	-53.35
7	23698.7	45.15 PK	74	-28.85	-56.75	-59.89	4.92	-50.11
8	23698.7	42.85 AV	54	-11.15	-59.08	-62.13	4.92	-52.41
9	38610.22	41.86 PK	74	-32.14	-60.13	-63	4.92	-53.4
10	38610.22	32.21 AV	54	-21.79	-69.07	-74.48	4.92	-63.05

Note: Margin value = Emission Level - Limit value

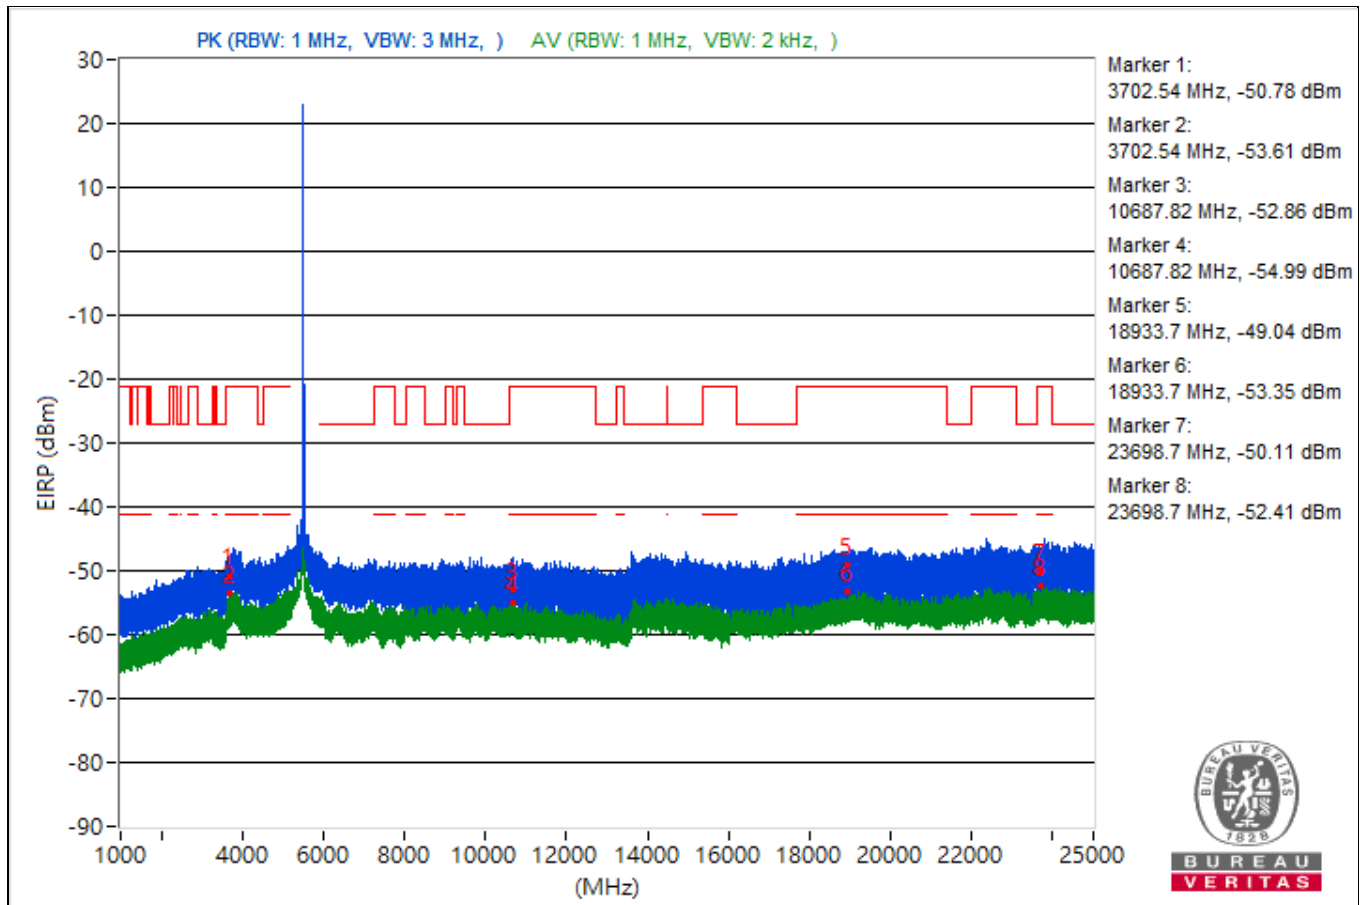


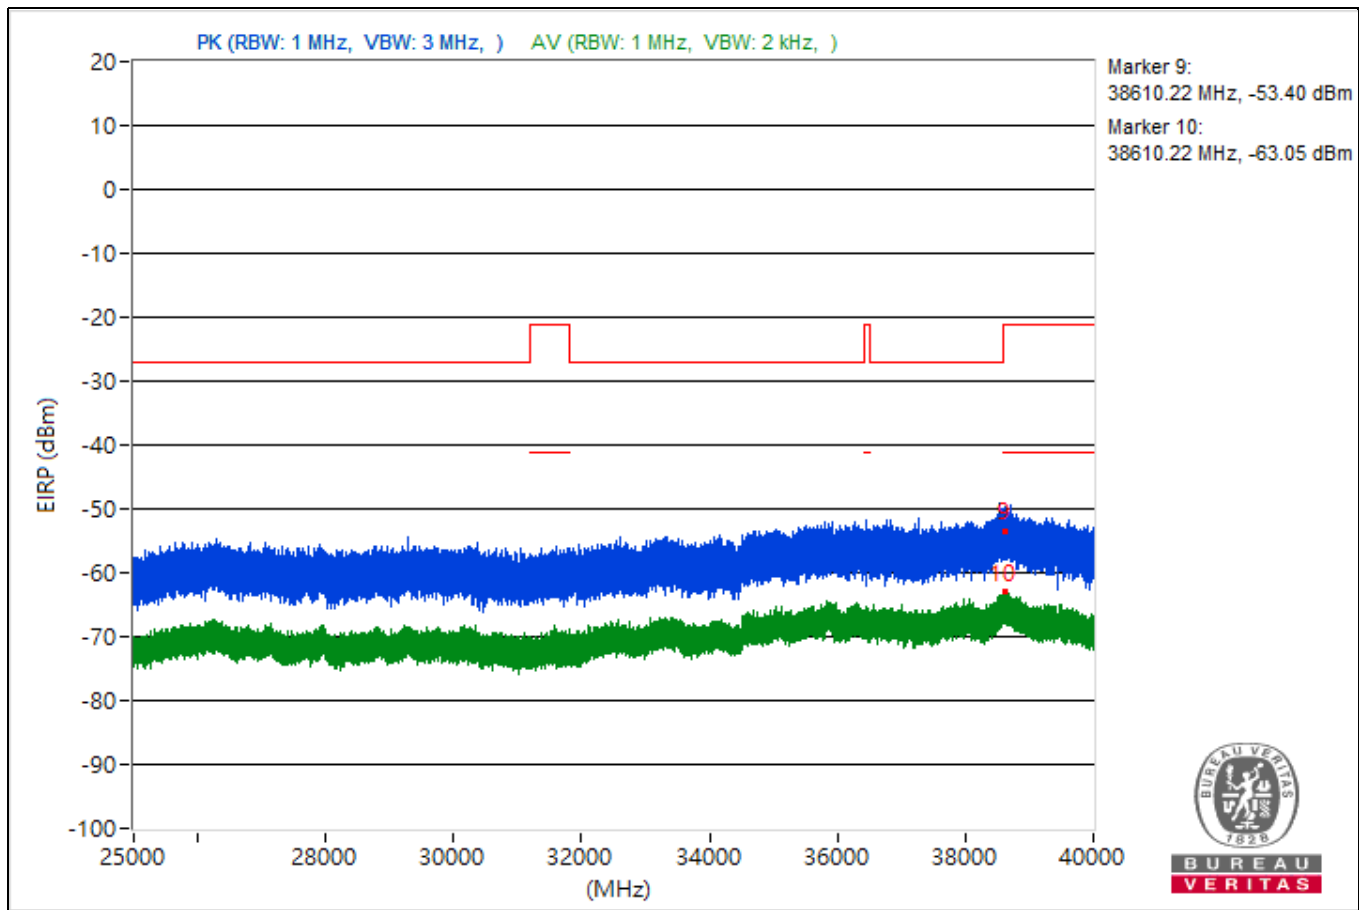


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3761.89	46.18 PK	74	-27.82	-56.32	-57.82	4.92	-49.08
2	3761.89	41.75 AV	54	-12.25	-62.4	-60.65	4.92	-53.51
3	8453.51	42.4 PK	74	-31.6	-59.47	-62.72	4.92	-52.86
4	8453.51	39.89 AV	54	-14.11	-65.24	-61.96	4.92	-55.37
5	18895.5	44.31 PK	74	-29.69	-58.85	-58.92	4.92	-50.95
6	18895.5	41.44 AV	54	-12.56	-61.02	-62.62	4.92	-53.82
7	23815.9	46.76 PK	74	-27.24	-56.47	-56.39	4.92	-48.5
8	23815.9	42.45 AV	54	-11.55	-58.91	-63.97	4.92	-52.81
9	38628.98	42.96 PK	74	-31.04	-57.93	-65.4	4.92	-52.3
10	38628.98	31.68 AV	54	-22.32	-69.68	-74.75	4.92	-63.58

Note: Margin value = Emission Level - Limit value

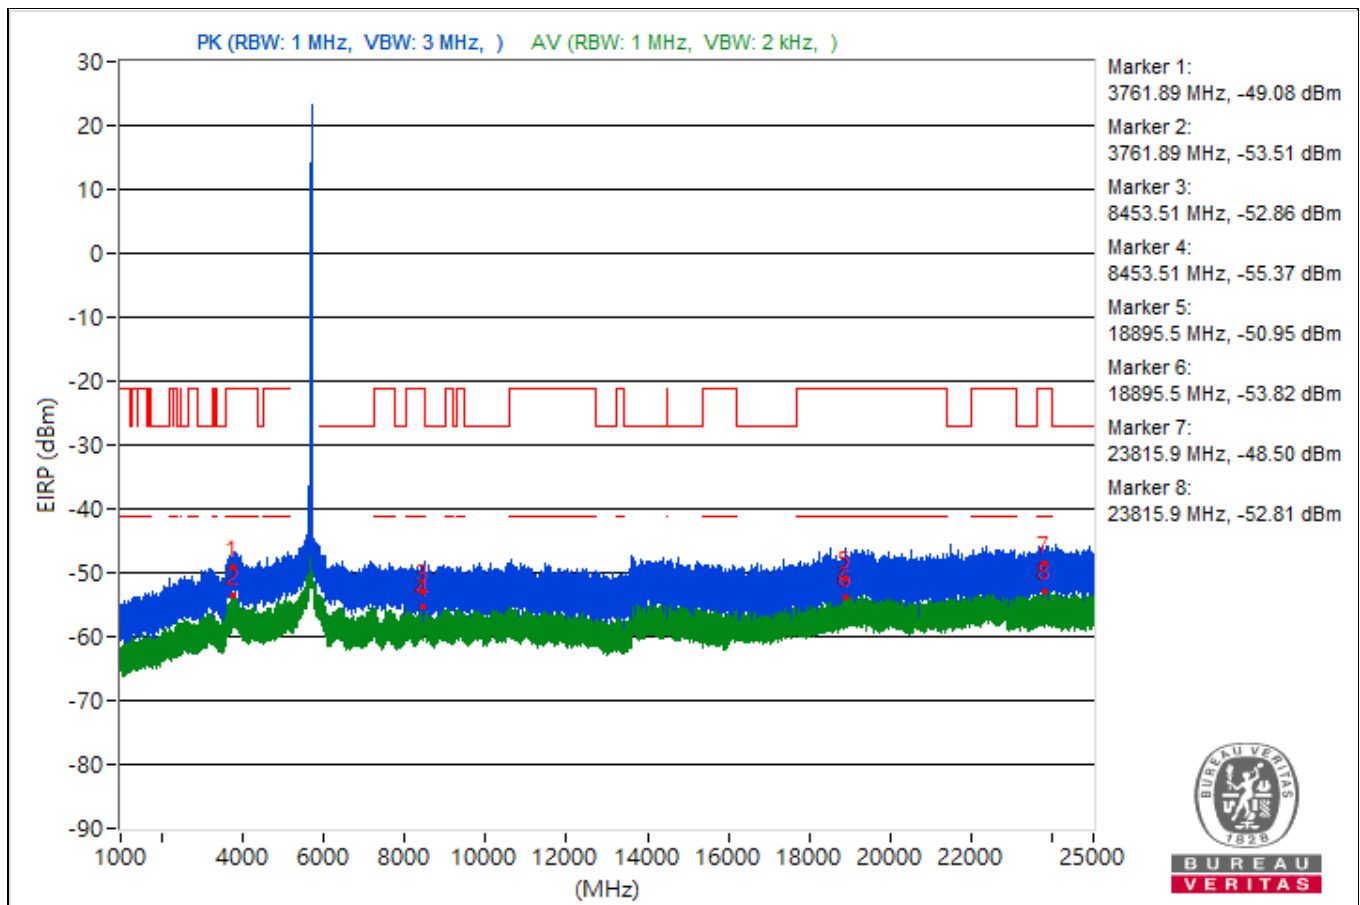


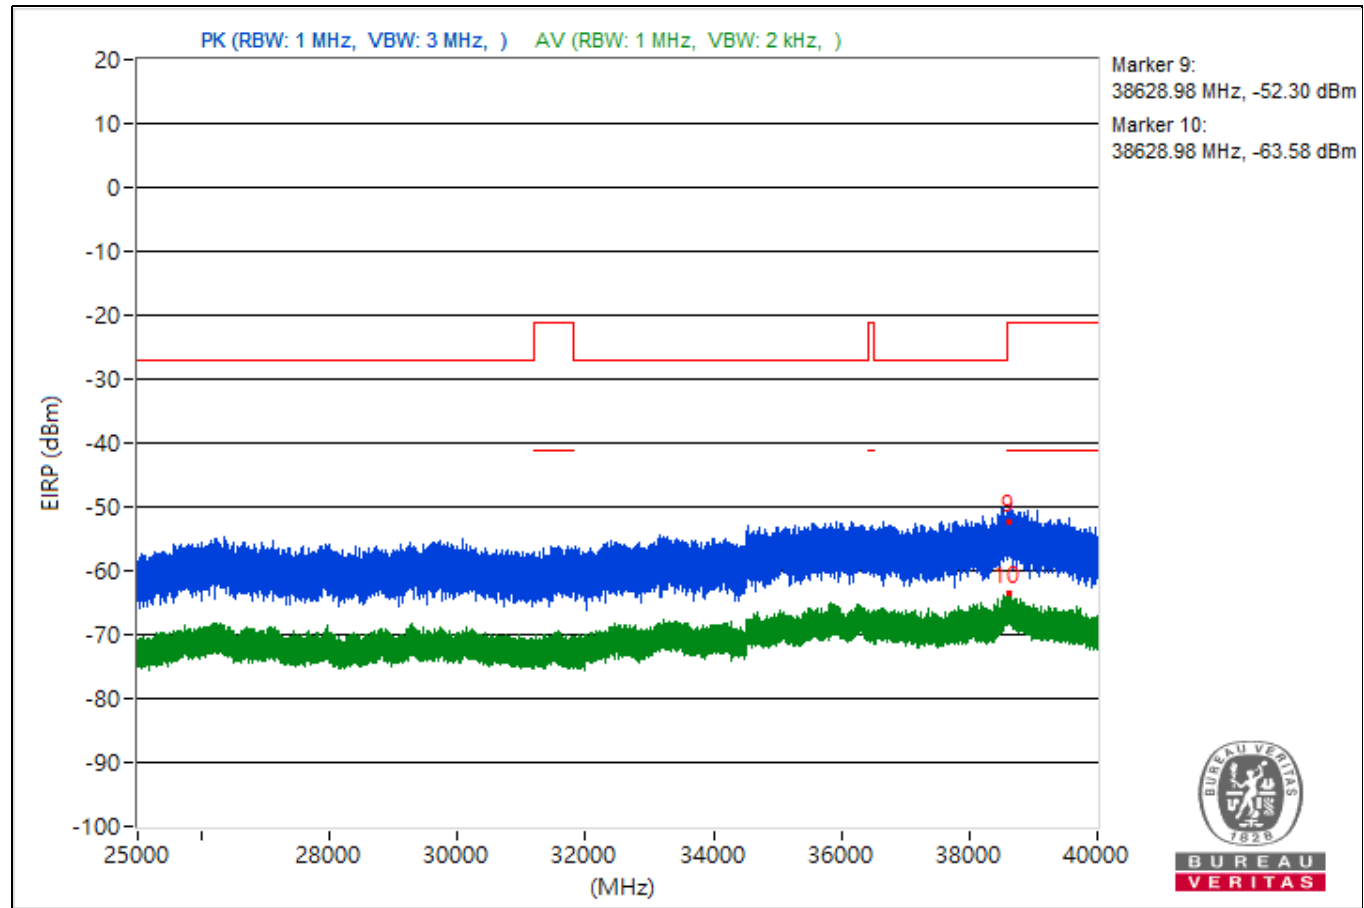


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.4	44.93 PK	74	-29.07	-57.77	-58.82	4.92	-50.33
2	3822.4	41.59 AV	54	-12.41	-63.19	-60.43	4.92	-53.67
3	8490.22	41 PK	74	-33	-61.76	-62.66	4.92	-54.26
4	8490.22	39.72 AV	54	-14.28	-62.09	-65.52	4.92	-55.54
5	18731.2	43.82 PK	74	-30.18	-58.57	-60.36	4.92	-51.44
6	18731.2	40.46 AV	54	-13.54	-60.77	-66.4	4.92	-54.8
7	23818.5	46.06 PK	74	-27.94	-57.21	-57.05	4.92	-49.2
8	23818.5	41.87 AV	54	-12.13	-59.38	-64.9	4.92	-53.39
9	38662.67	39.68 PK	74	-34.32	-62.72	-64.47	4.92	-55.58
10	38662.67	31.94 AV	54	-22.06	-75.04	-69.26	4.92	-63.32

Note: Margin value = Emission Level - Limit value

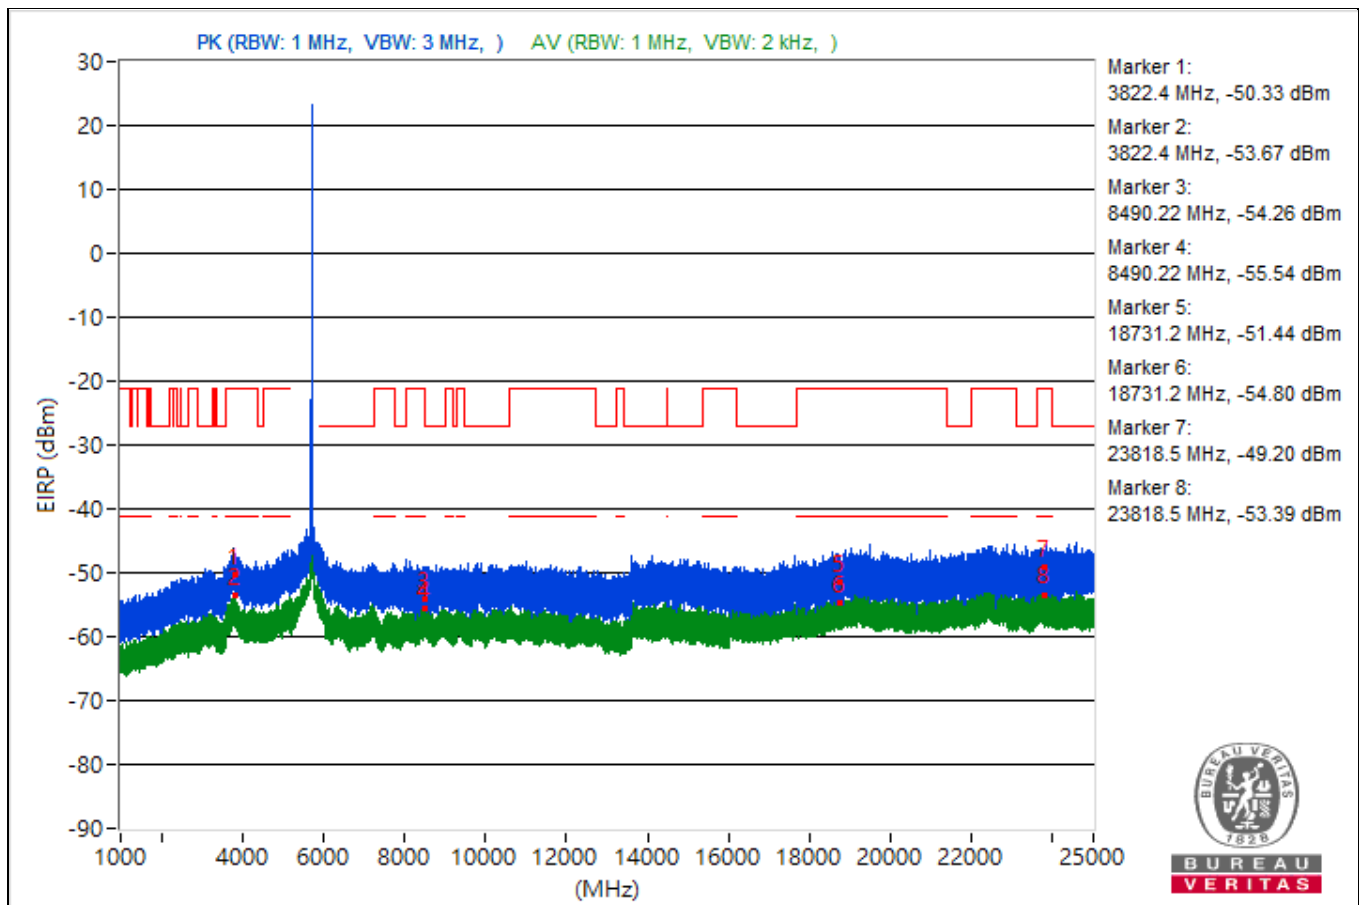


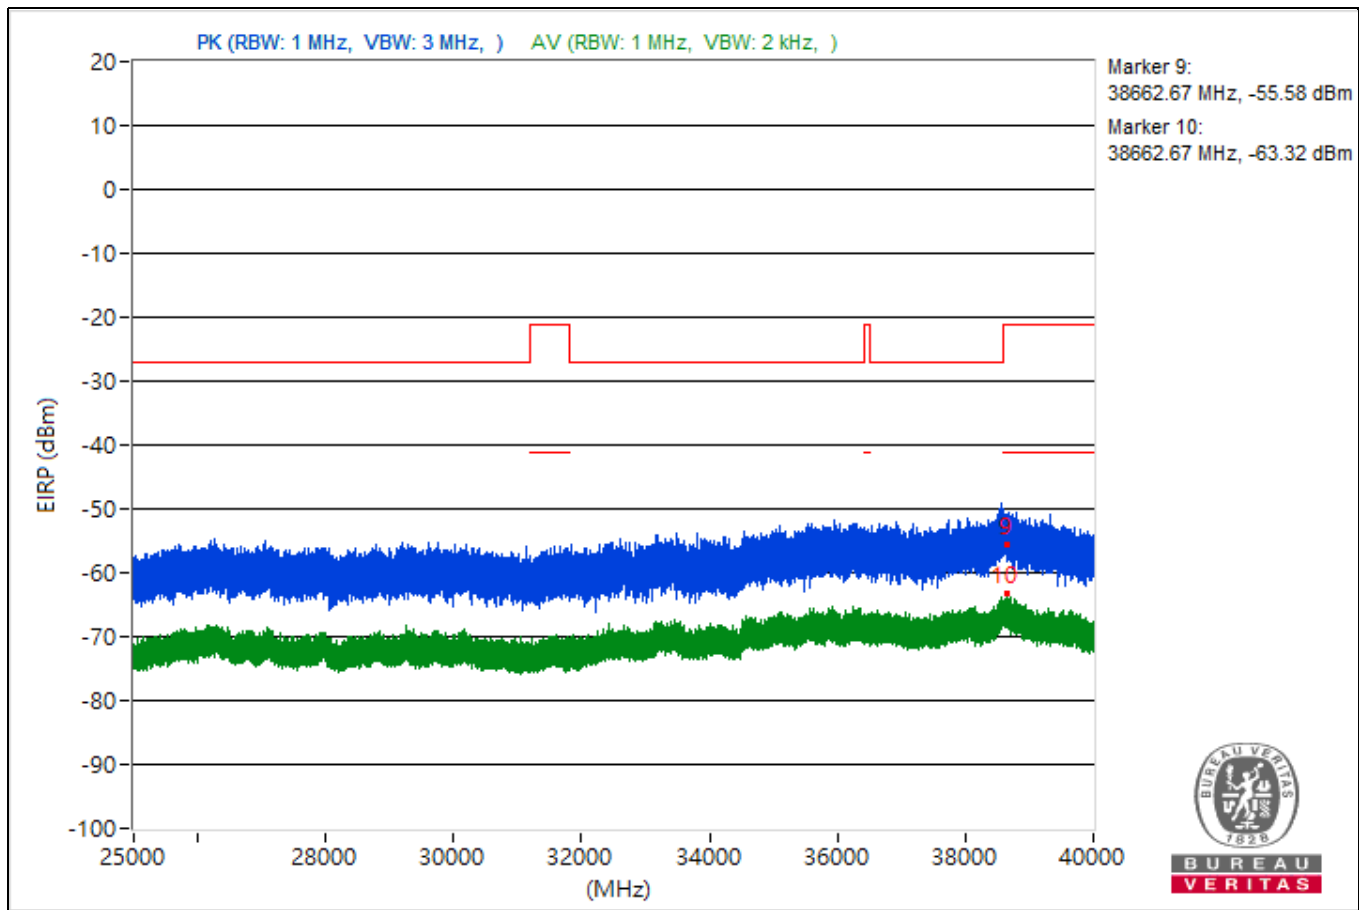


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4775.57	44.63 PK	74	-29.37	-57.46	-60.03	4.92	-50.63
2	4775.57	41.94 AV	54	-12.06	-59.93	-63.17	4.92	-53.32
3	11473.33	47.94 PK	74	-26.06	-53.39	-58.57	4.92	-47.32
4	11473.33	43.12 AV	54	-10.88	-57.99	-64.22	4.92	-52.14
5	18857.7	44.68 PK	74	-29.32	-57.52	-59.81	4.92	-50.58
6	18857.7	41.89 AV	54	-12.11	-60.03	-63.12	4.92	-53.37
7	23912.2	44.15 PK	74	-29.85	-58.39	-59.81	4.92	-51.11
8	23912.2	42.49 AV	54	-11.51	-58.97	-63.64	4.92	-52.77
9	38653.33	40.56 PK	74	-33.44	-63.82	-61.7	4.92	-54.7
10	38653.33	31.7 AV	54	-22.3	-75.07	-69.55	4.92	-63.56

Note: Margin value = Emission Level - Limit value

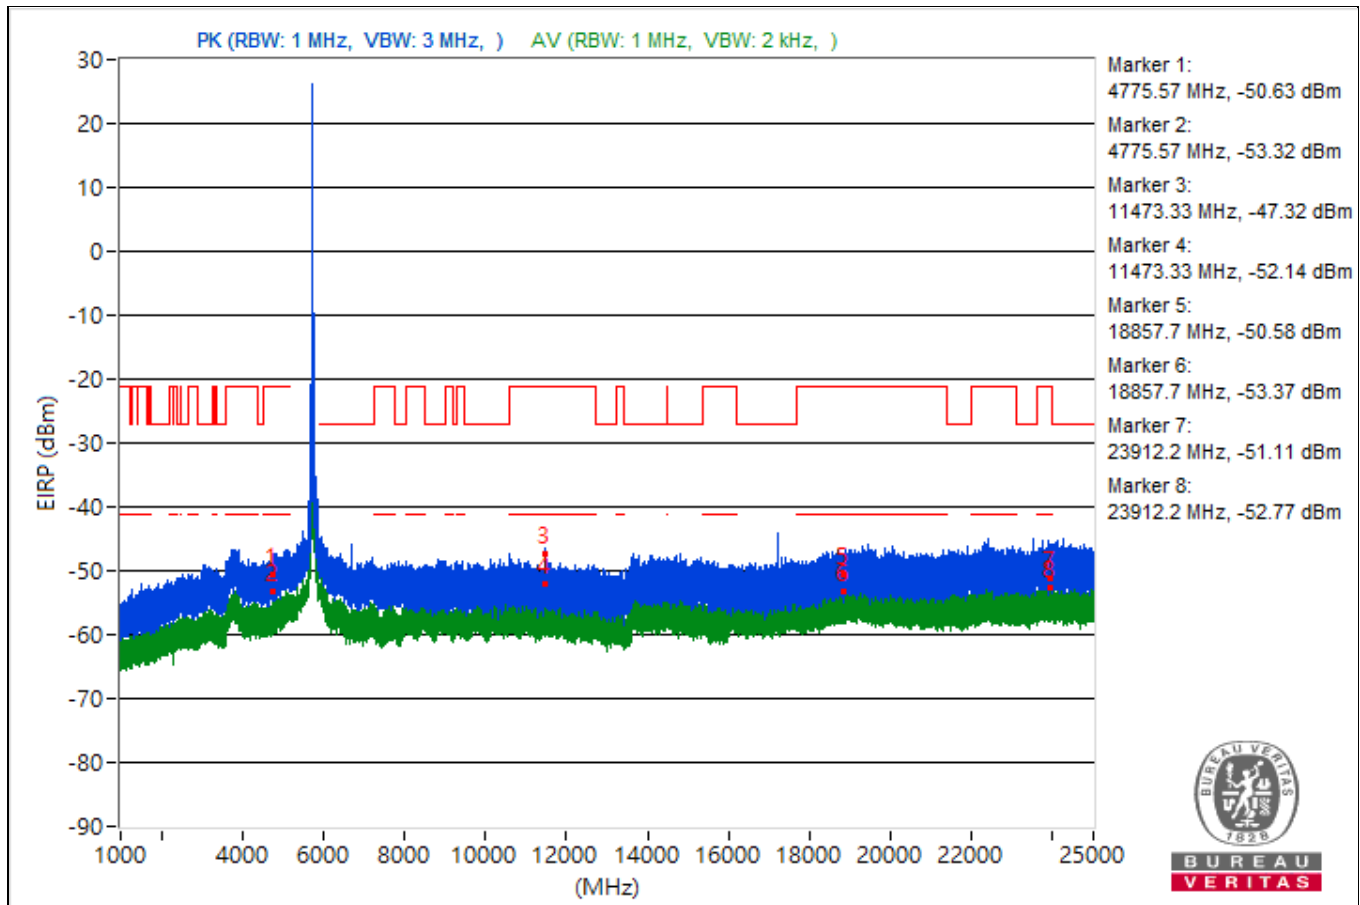


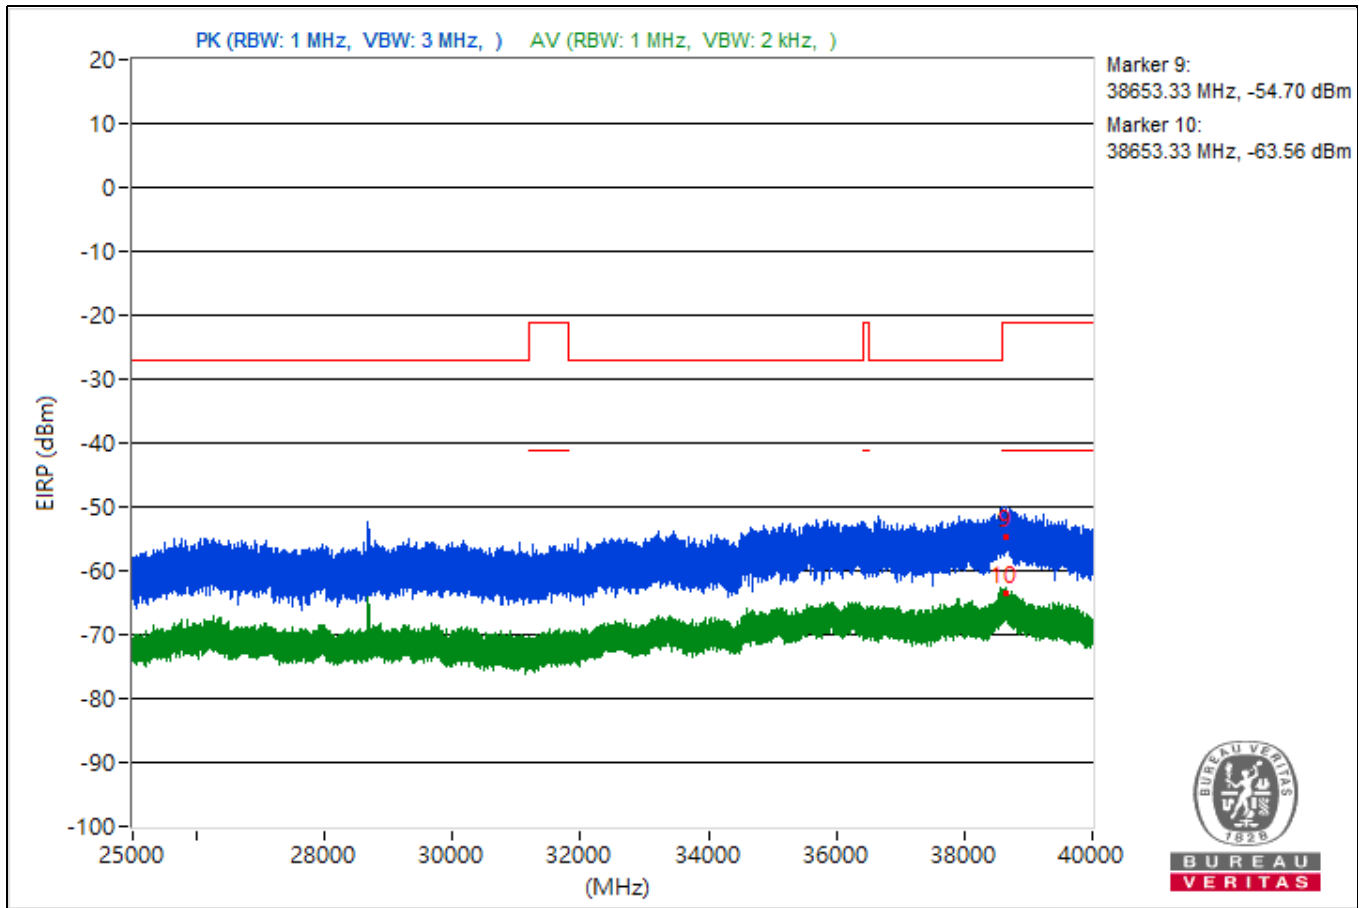


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4873.49	49.16 PK	74	-24.84	-53.4	-54.77	4.92	-46.1
2	4873.49	43.81 AV	54	-10.19	-59.26	-59.5	4.92	-51.45
3	11667.56	45.99 PK	74	-28.01	-55.75	-59.39	4.92	-49.27
4	11667.56	40.38 AV	54	-13.62	-60.64	-67.36	4.92	-54.88
5	18979.7	44.88 PK	74	-29.12	-56.57	-61.25	4.92	-50.38
6	18979.7	41.04 AV	54	-12.96	-64.62	-60.58	4.92	-54.22
7	23612.2	47.61 PK	74	-26.39	-55.61	-55.56	4.92	-47.65
8	23612.2	42.43 AV	54	-11.57	-63.47	-59.11	4.92	-52.83
9	38657.33	39.62 PK	74	-34.38	-64.31	-62.94	4.92	-55.64
10	38657.33	31.62 AV	54	-22.38	-70.31	-73.35	4.92	-63.64

Note: Margin value = Emission Level - Limit value

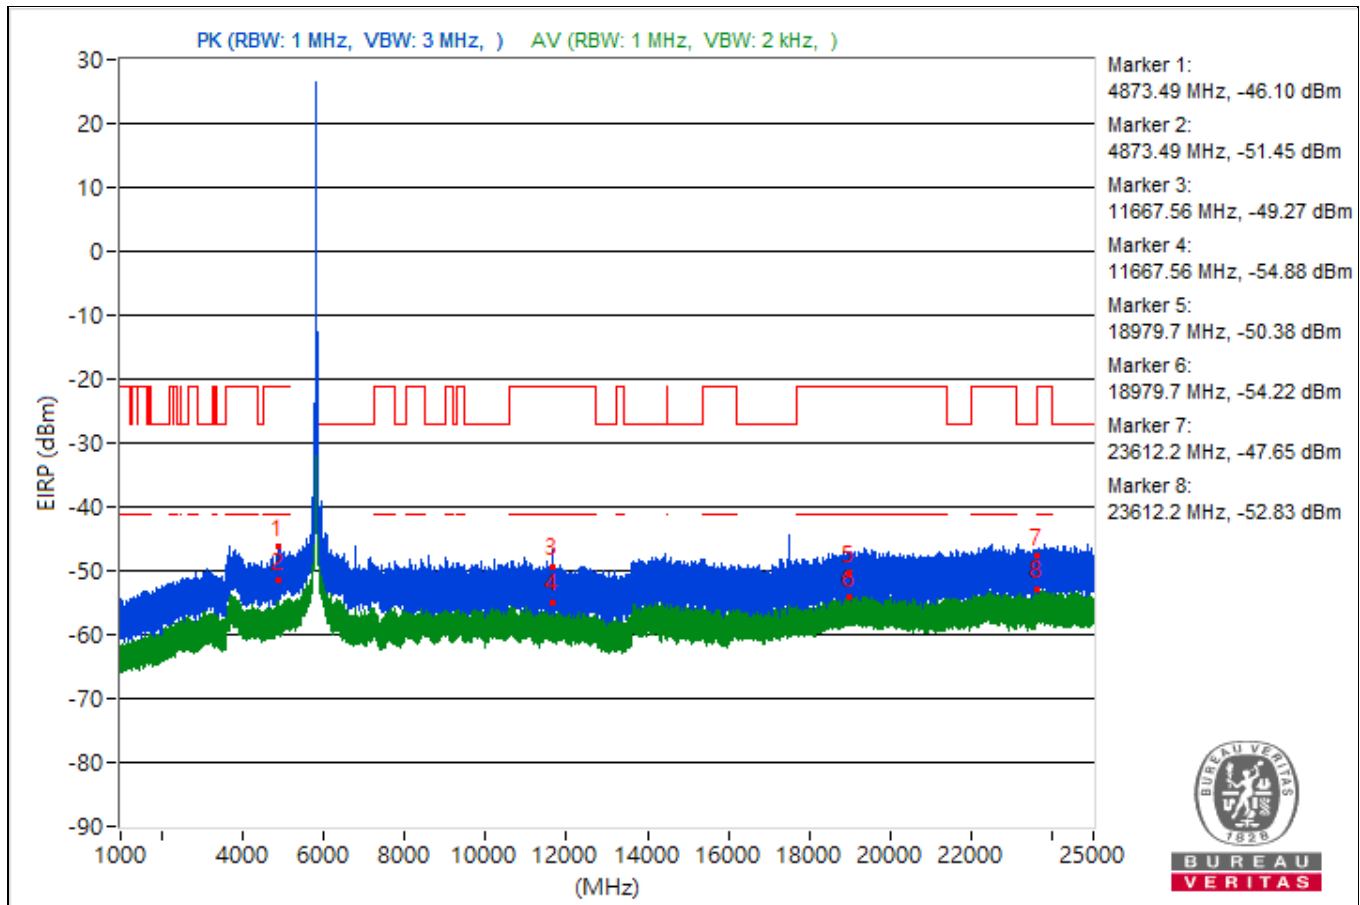


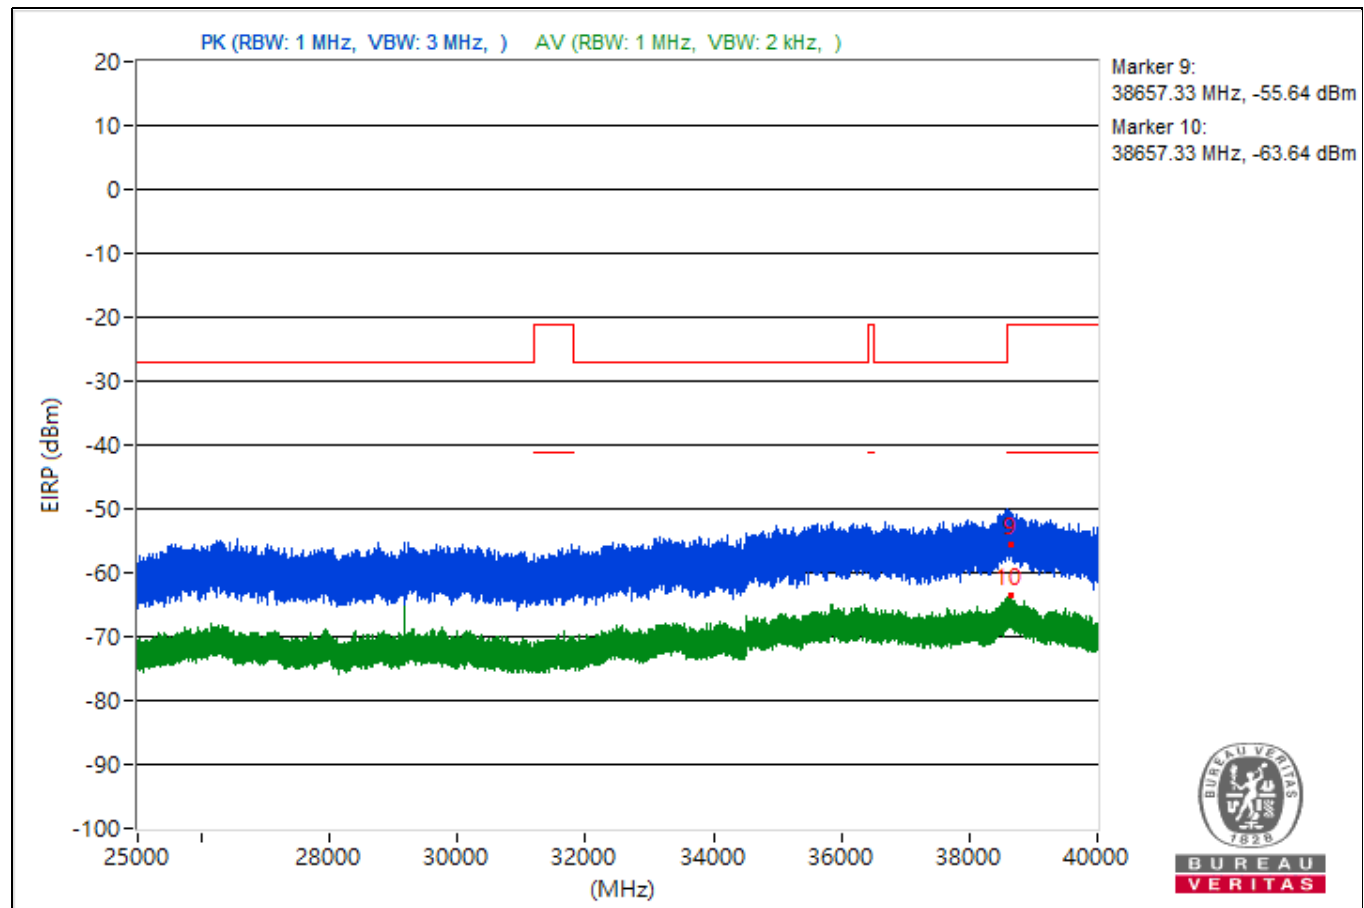


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.67	49.11 PK	74	-24.89	-56.18	-52.67	4.92	-46.15
2	5099.67	45.53 AV	54	-8.47	-57.2	-58.17	4.92	-49.73
3	9348.71	44.02 PK	74	-29.98	-58.46	-60.02	4.92	-51.24
4	9348.71	40.21 AV	54	-13.79	-62.14	-64.03	4.92	-55.05
5	18412.8	44.47 PK	74	-29.53	-57.65	-60.14	4.92	-50.79
6	18412.8	41.4 AV	54	-12.6	-60.74	-63.18	4.92	-53.86
7	23778.9	47.23 PK	74	-26.77	-56.53	-55.45	4.92	-48.03
8	23778.9	42.02 AV	54	-11.98	-63.04	-59.87	4.92	-53.24
9	38610.93	40.38 PK	74	-33.62	-62.47	-63.17	4.92	-54.88
10	38610.93	31.09 AV	54	-22.91	-70.2	-75.54	4.92	-64.17

Note: Margin value = Emission Level - Limit value

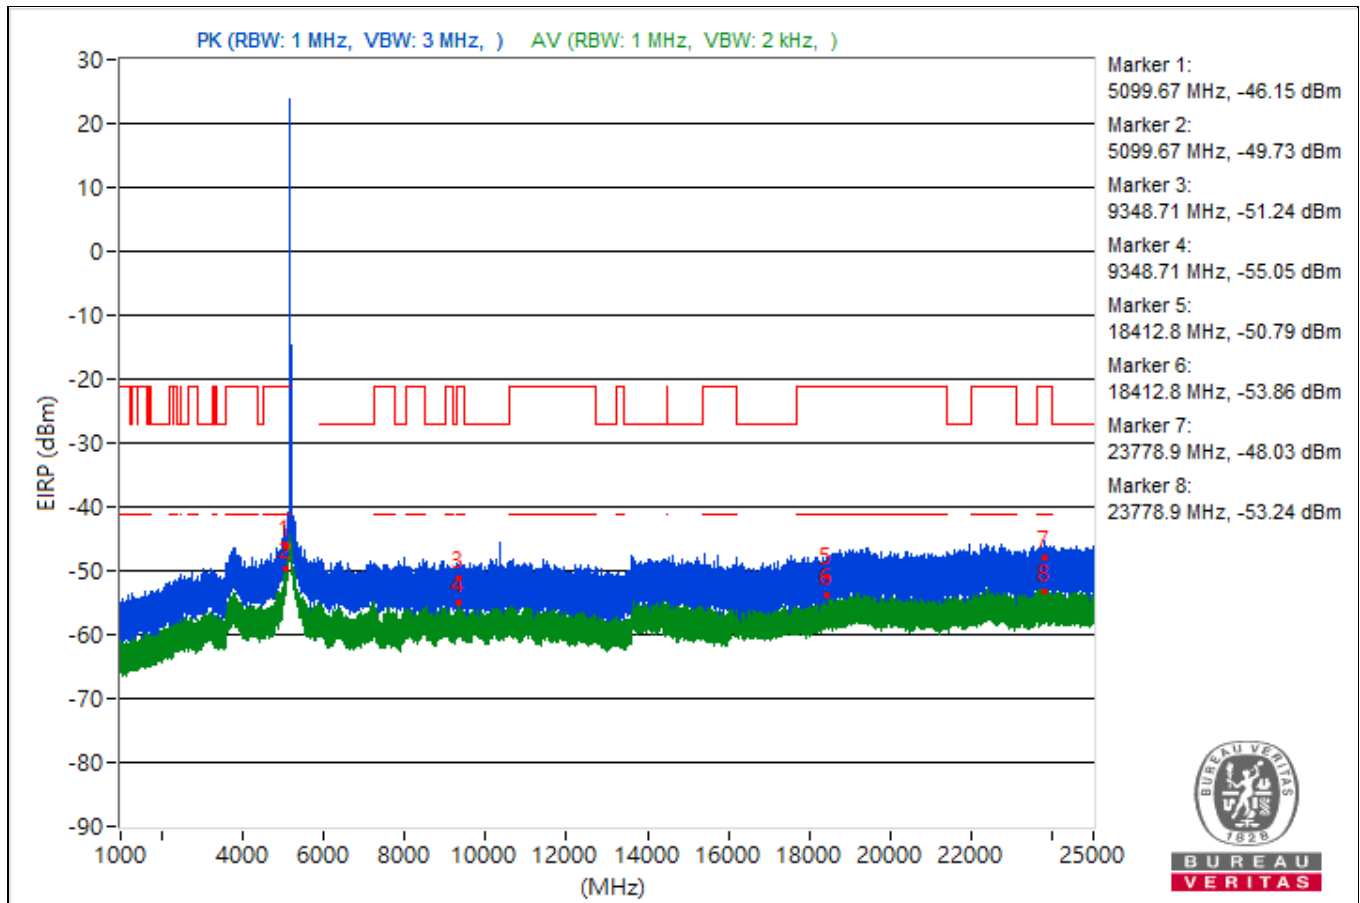


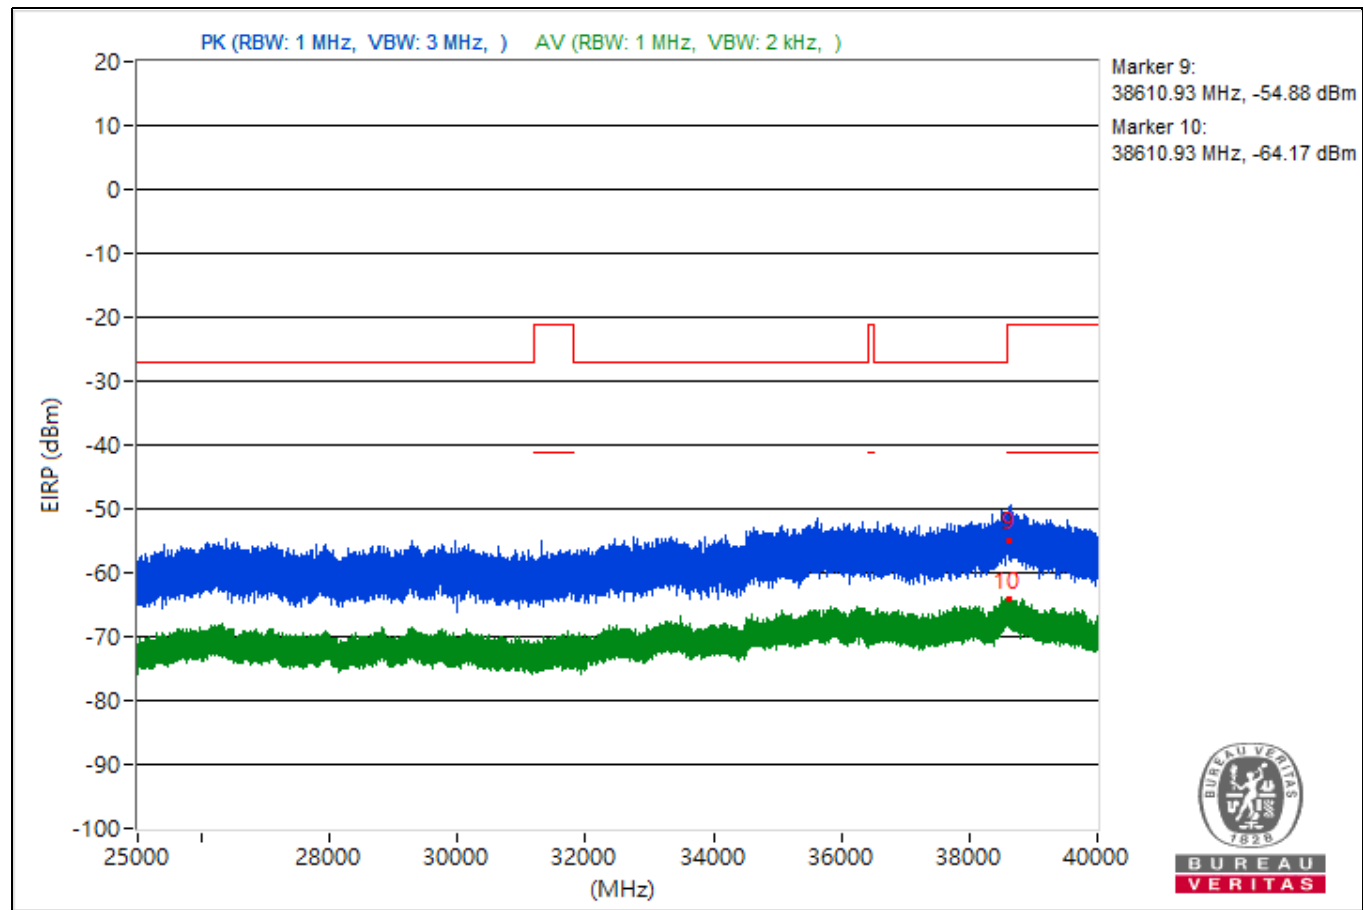


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5088.39	46.63 PK	74	-27.37	-56.78	-56.35	4.92	-48.63
2	5088.39	43.19 AV	54	-10.81	-59.58	-60.48	4.92	-52.07
3	11897.96	43.08 PK	74	-30.92	-61.36	-59.14	4.92	-52.18
4	11897.96	39.67 AV	54	-14.33	-61.81	-66.4	4.92	-55.59
5	18974.7	44.6 PK	74	-29.4	-57.41	-60.23	4.92	-50.66
6	18974.7	41.16 AV	54	-12.84	-60.58	-64.23	4.92	-54.1
7	22740.1	42.87 PK	74	-31.13	-59.89	-60.81	4.92	-52.39
8	22740.1	42.33 AV	54	-11.67	-59.29	-63.35	4.92	-52.93
9	38645.42	42.93 PK	74	-31.07	-62.02	-59.01	4.92	-52.33
10	38645.42	30.67 AV	54	-23.33	-76.31	-70.53	4.92	-64.59

Note: Margin value = Emission Level - Limit value

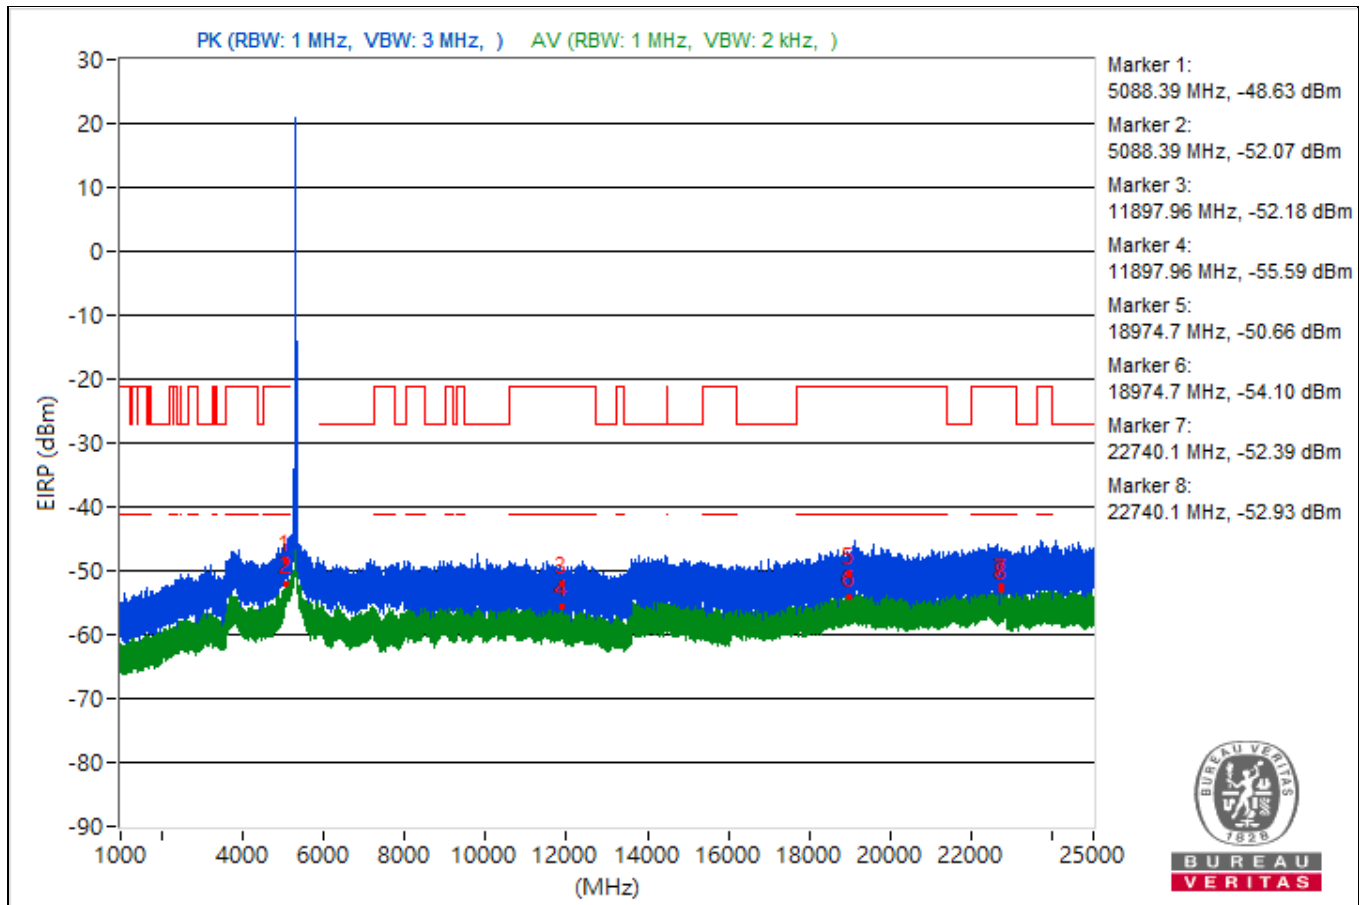


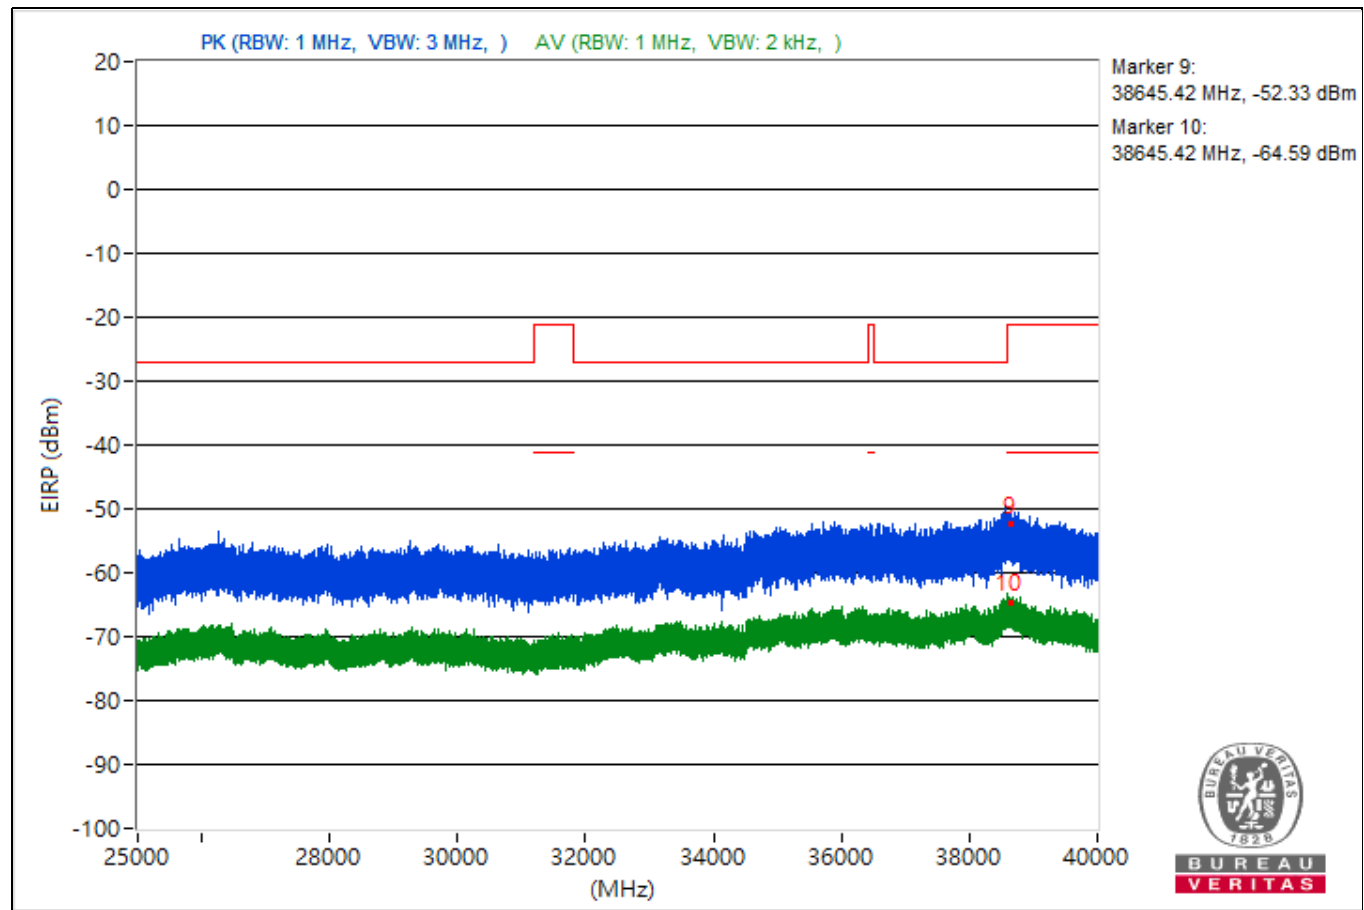


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3829.24	44.69 PK	74	-29.31	-59.17	-57.91	4.92	-50.57
2	3829.24	41.55 AV	54	-12.45	-60.56	-63.07	4.92	-53.71
3	9376.44	42.5 PK	74	-31.5	-60.78	-60.61	4.92	-52.76
4	9376.44	39.77 AV	54	-14.23	-62.24	-65.03	4.92	-55.49
5	18680.9	44.38 PK	74	-29.62	-59.16	-58.48	4.92	-50.88
6	18680.9	41.1 AV	54	-12.9	-60.37	-64.97	4.92	-54.16
7	23693.1	43.96 PK	74	-30.04	-58.78	-59.74	4.92	-51.3
8	23693.1	41.93 AV	54	-12.07	-59.56	-64.1	4.92	-53.33
9	38663.91	40.81 PK	74	-33.19	-62.42	-62.35	4.92	-54.45
10	38663.91	31.05 AV	54	-22.95	-75.8	-70.18	4.92	-64.21

Note: Margin value = Emission Level - Limit value

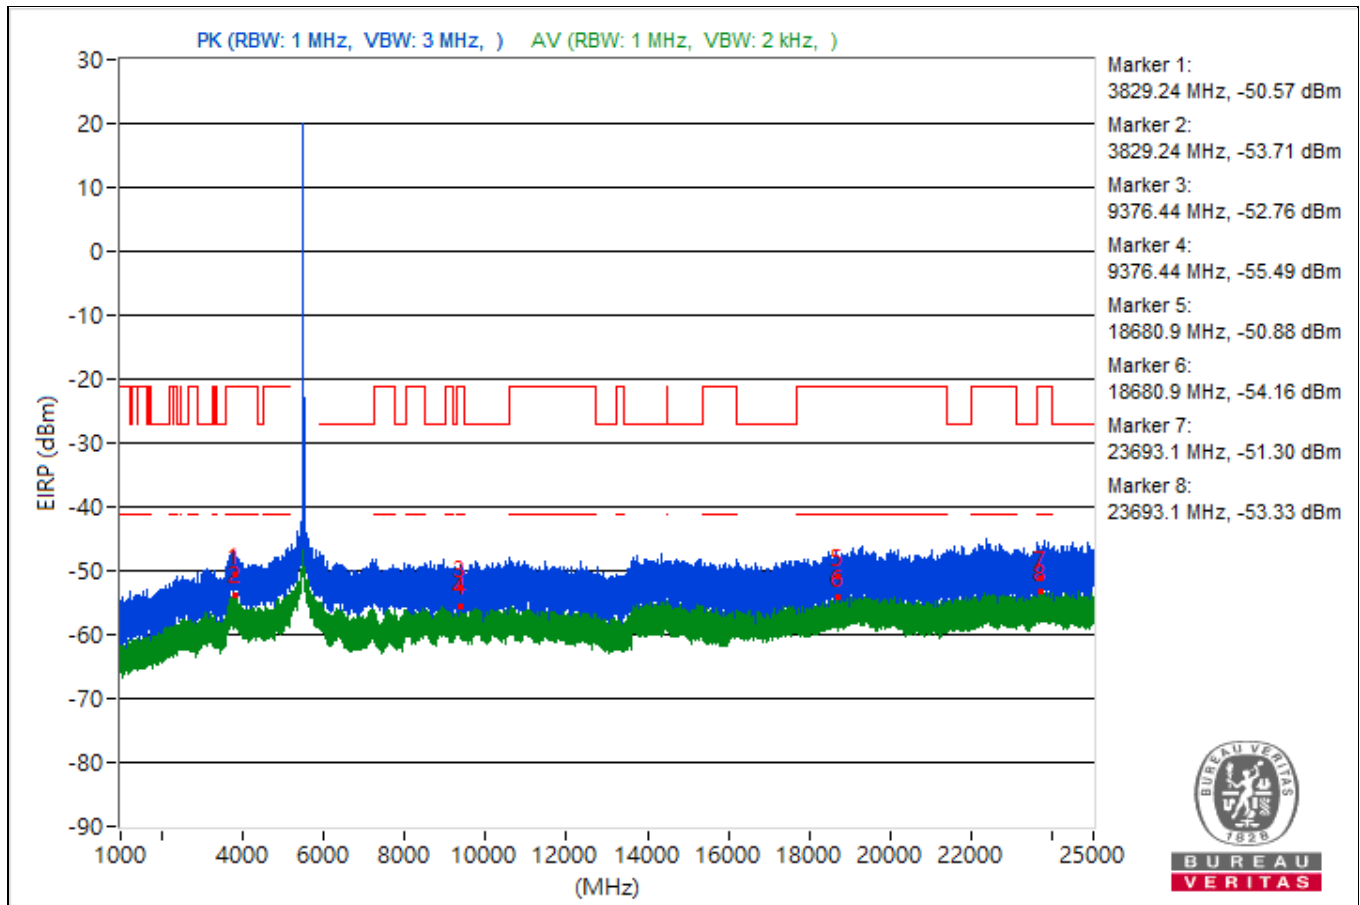


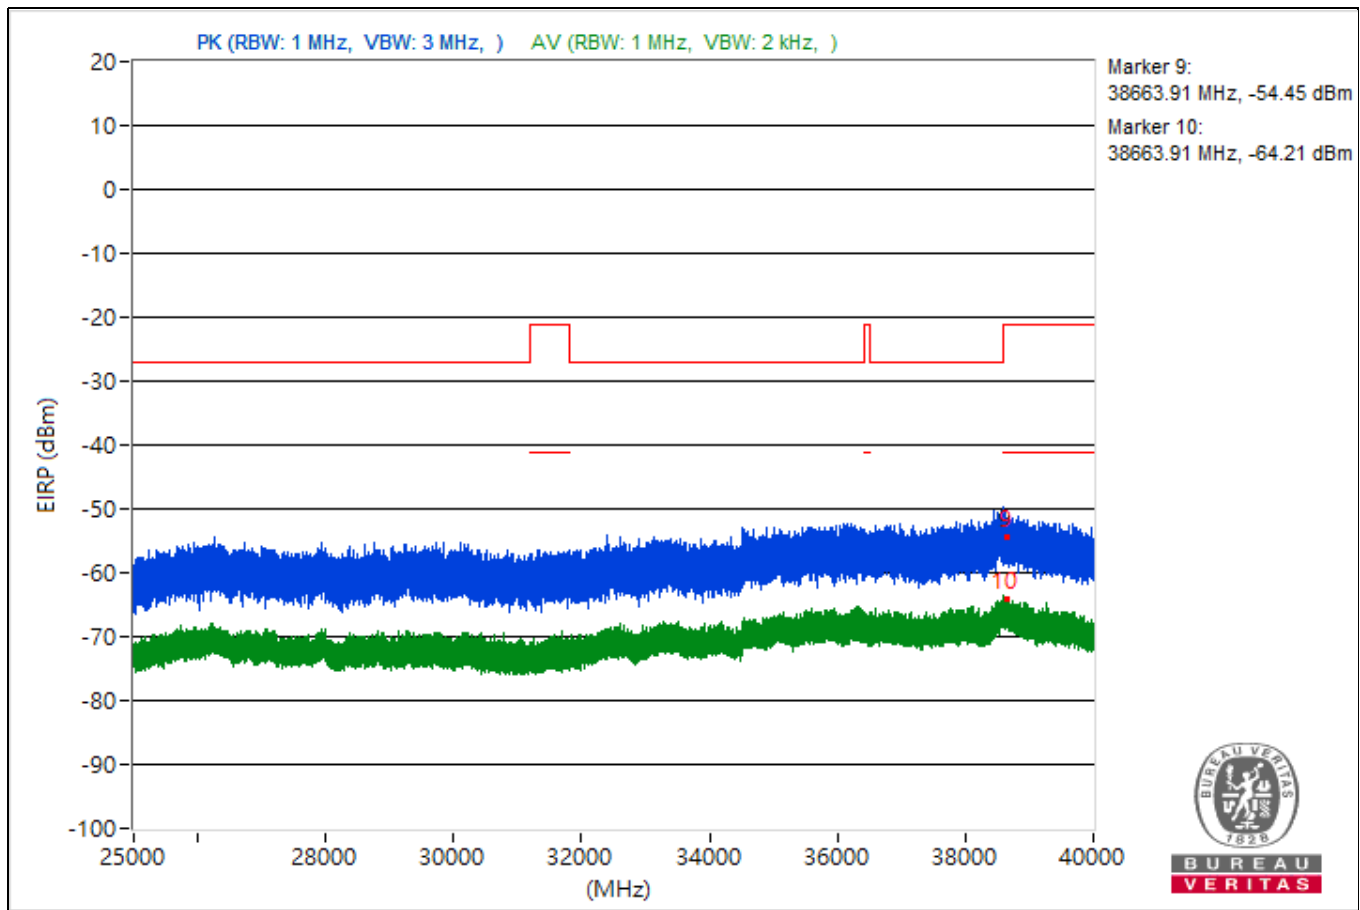


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3731.32	44.54 PK	74	-29.46	-57.82	-59.69	4.92	-50.72
2	3731.32	40.74 AV	54	-13.26	-60.82	-65.09	4.92	-54.52
3	9386.58	42.96 PK	74	-31.04	-59.81	-60.7	4.92	-52.3
4	9386.58	40.4 AV	54	-13.6	-61.75	-64.16	4.92	-54.86
5	18755.5	41.84 PK	74	-32.16	-61	-61.74	4.92	-53.42
6	18755.5	41.23 AV	54	-12.77	-64.18	-60.5	4.92	-54.03
7	23690.2	44.49 PK	74	-29.51	-58.02	-59.51	4.92	-50.77
8	23690.2	43.09 AV	54	-10.91	-58.94	-61.7	4.92	-52.17
9	38667.11	42.19 PK	74	-31.81	-60.46	-61.63	4.92	-53.07
10	38667.11	30.85 AV	54	-23.15	-70.71	-74.97	4.92	-64.41

Note: Margin value = Emission Level - Limit value

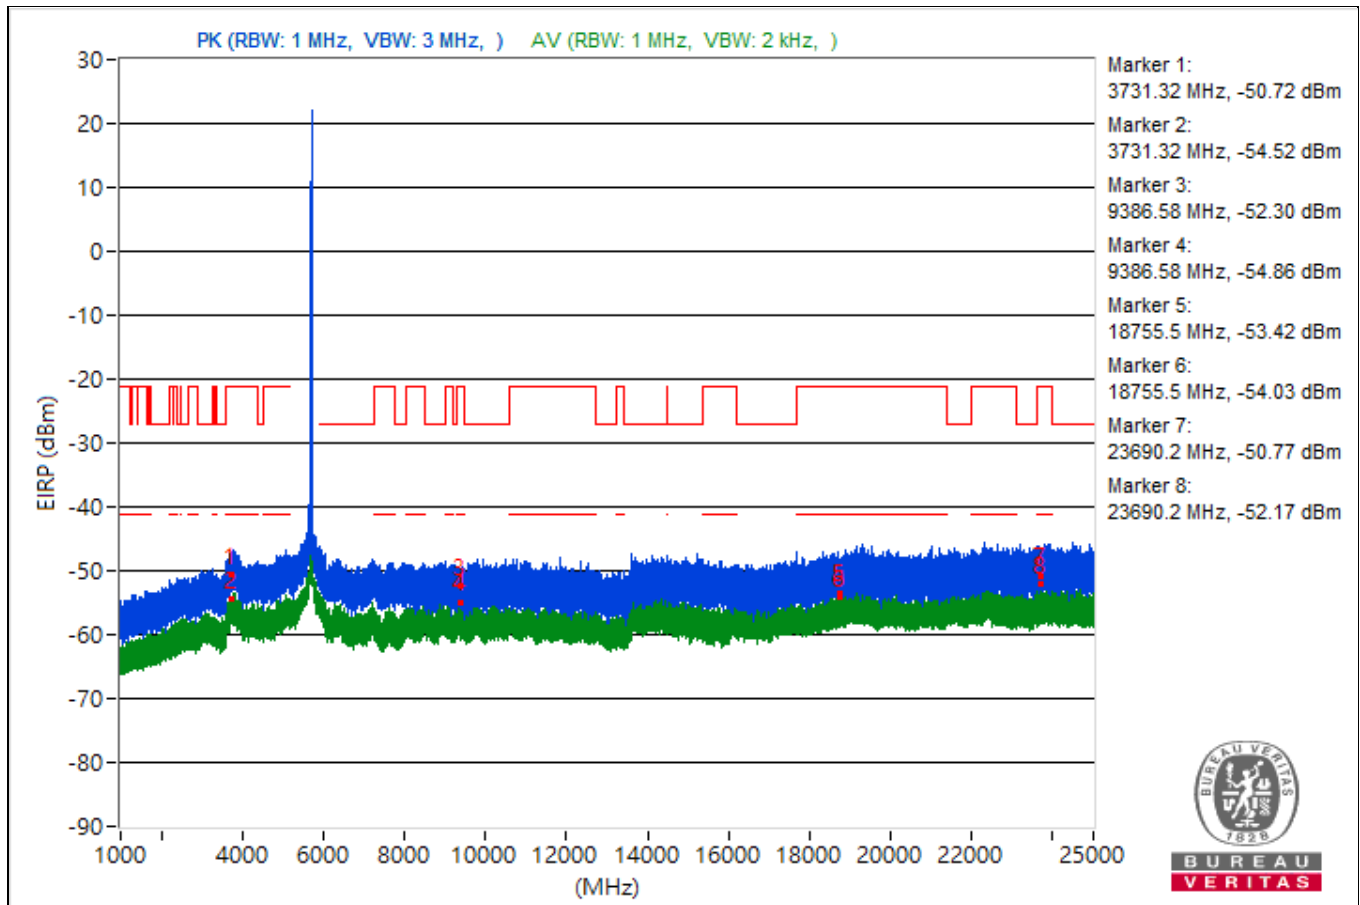


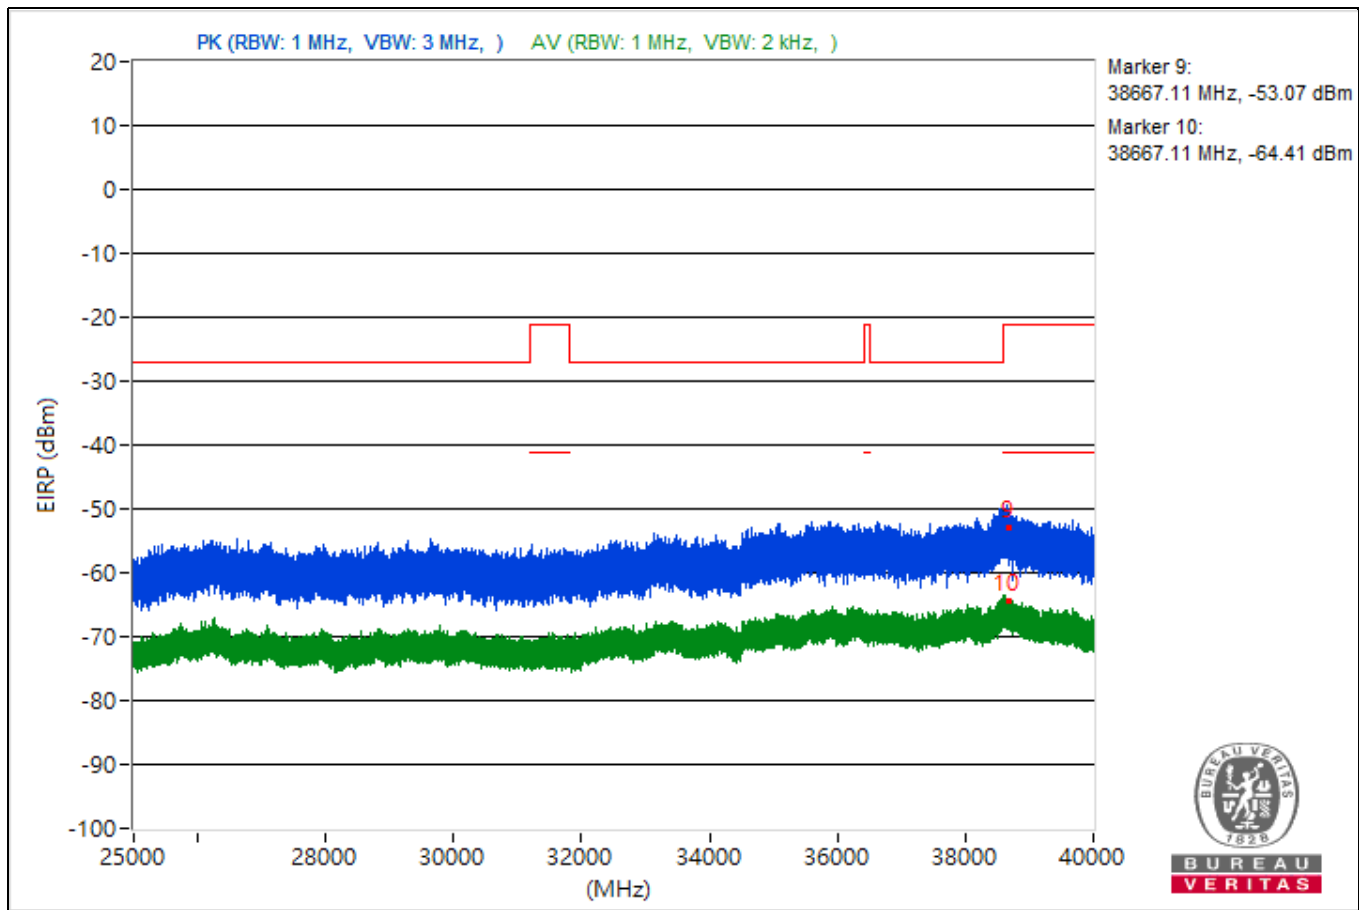


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3755.43	44.49 PK	74	-29.51	-59.48	-58.04	4.92	-50.77
2	3755.43	41.31 AV	54	-12.69	-60.5	-63.93	4.92	-53.95
3	10957.24	42.22 PK	74	-31.78	-60.3	-61.77	4.92	-53.04
4	10957.24	40.04 AV	54	-13.96	-61.26	-66.59	4.92	-55.22
5	18505.1	44.39 PK	74	-29.61	-58.14	-59.59	4.92	-50.87
6	18505.1	40.74 AV	54	-13.26	-66.22	-60.46	4.92	-54.52
7	22739.8	45.84 PK	74	-28.16	-57.64	-57.08	4.92	-49.42
8	22739.8	42.29 AV	54	-11.71	-59.8	-62.39	4.92	-52.97
9	38619.73	41.44 PK	74	-32.56	-62.06	-61.47	4.92	-53.82
10	38619.73	32.03 AV	54	-21.97	-72.96	-69.89	4.92	-63.23

Note: Margin value = Emission Level - Limit value

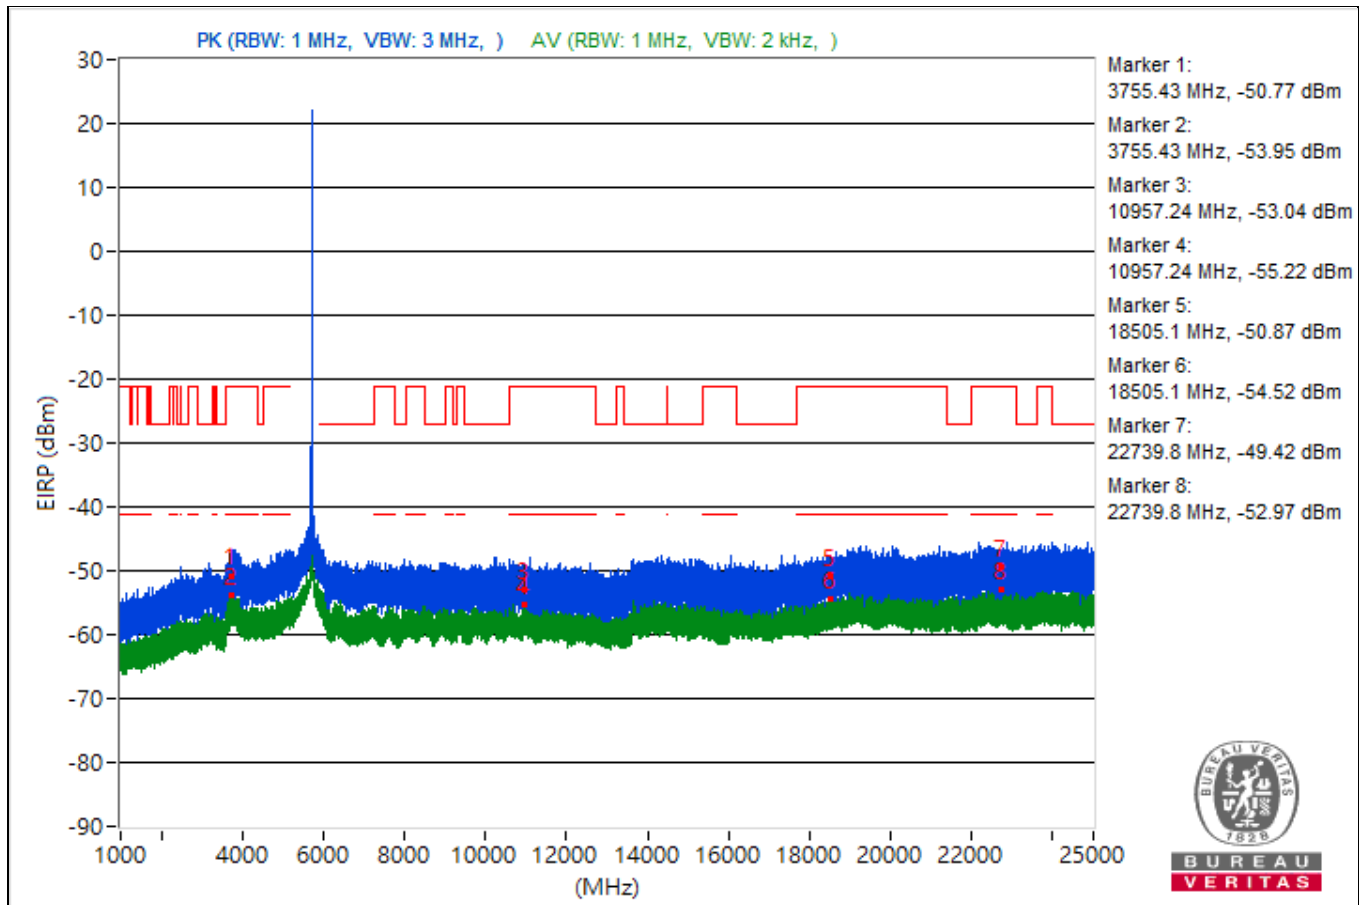


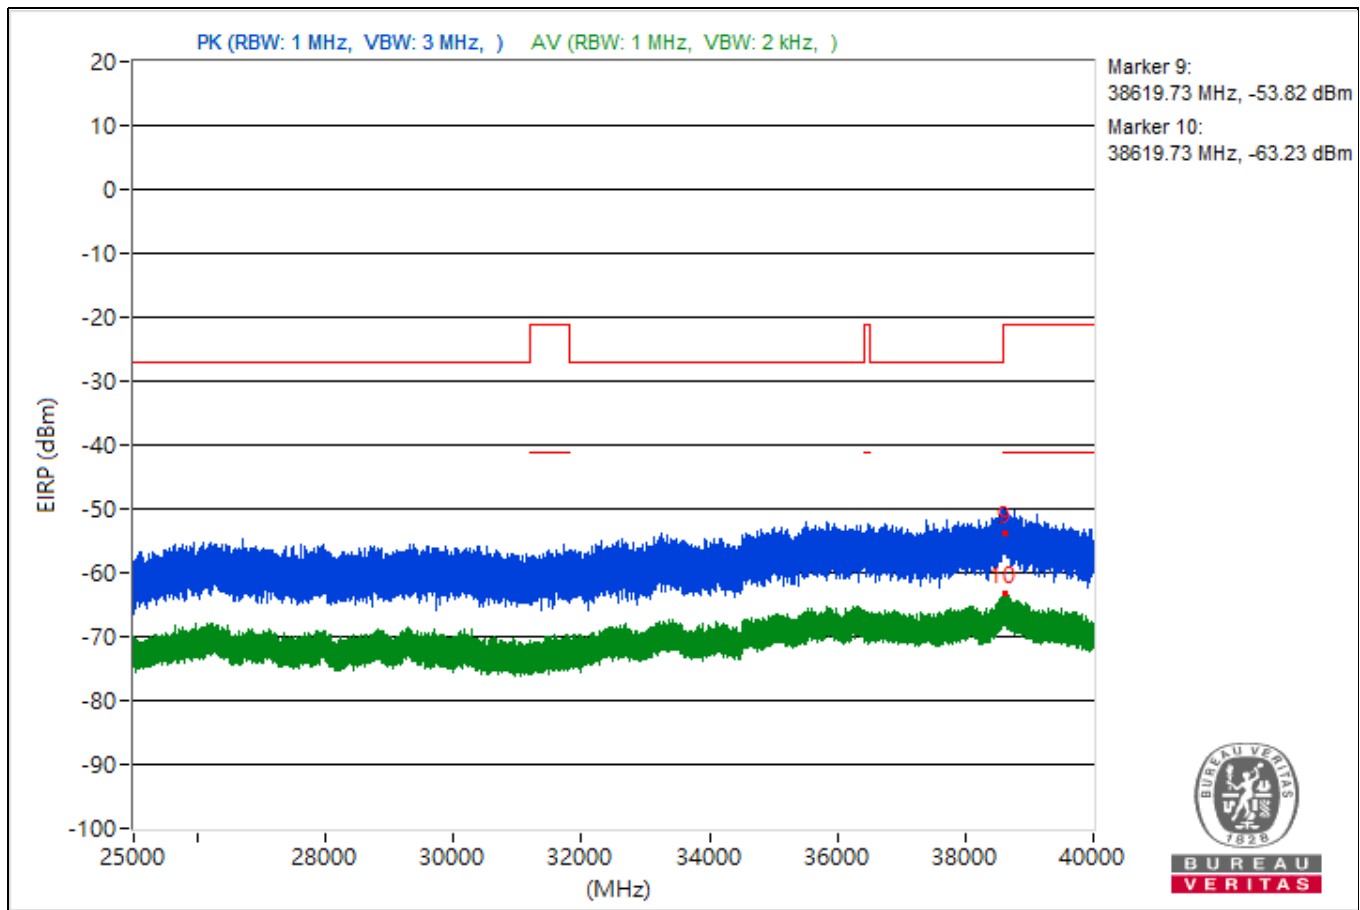


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3836.87	46.02 PK	74	-27.98	-55.87	-59.03	4.92	-49.24
2	3836.87	41.11 AV	54	-12.89	-64.44	-60.56	4.92	-54.15
3	11474.58	45.63 PK	74	-28.37	-57.7	-57.42	4.92	-49.63
4	11474.58	43.95 AV	54	-10.05	-59.46	-59.02	4.92	-51.31
5	18506.1	44.12 PK	74	-29.88	-58.16	-60.23	4.92	-51.14
6	18506.1	41.43 AV	54	-12.57	-60.7	-63.16	4.92	-53.83
7	23799.1	44.47 PK	74	-29.53	-60.21	-57.62	4.92	-50.79
8	23799.1	42.54 AV	54	-11.46	-62.11	-59.56	4.92	-52.72
9	38620.09	42.88 PK	74	-31.12	-65.92	-57.95	4.92	-52.38
10	38620.09	31.48 AV	54	-22.52	-70.09	-74.32	4.92	-63.78

Note: Margin value = Emission Level - Limit value

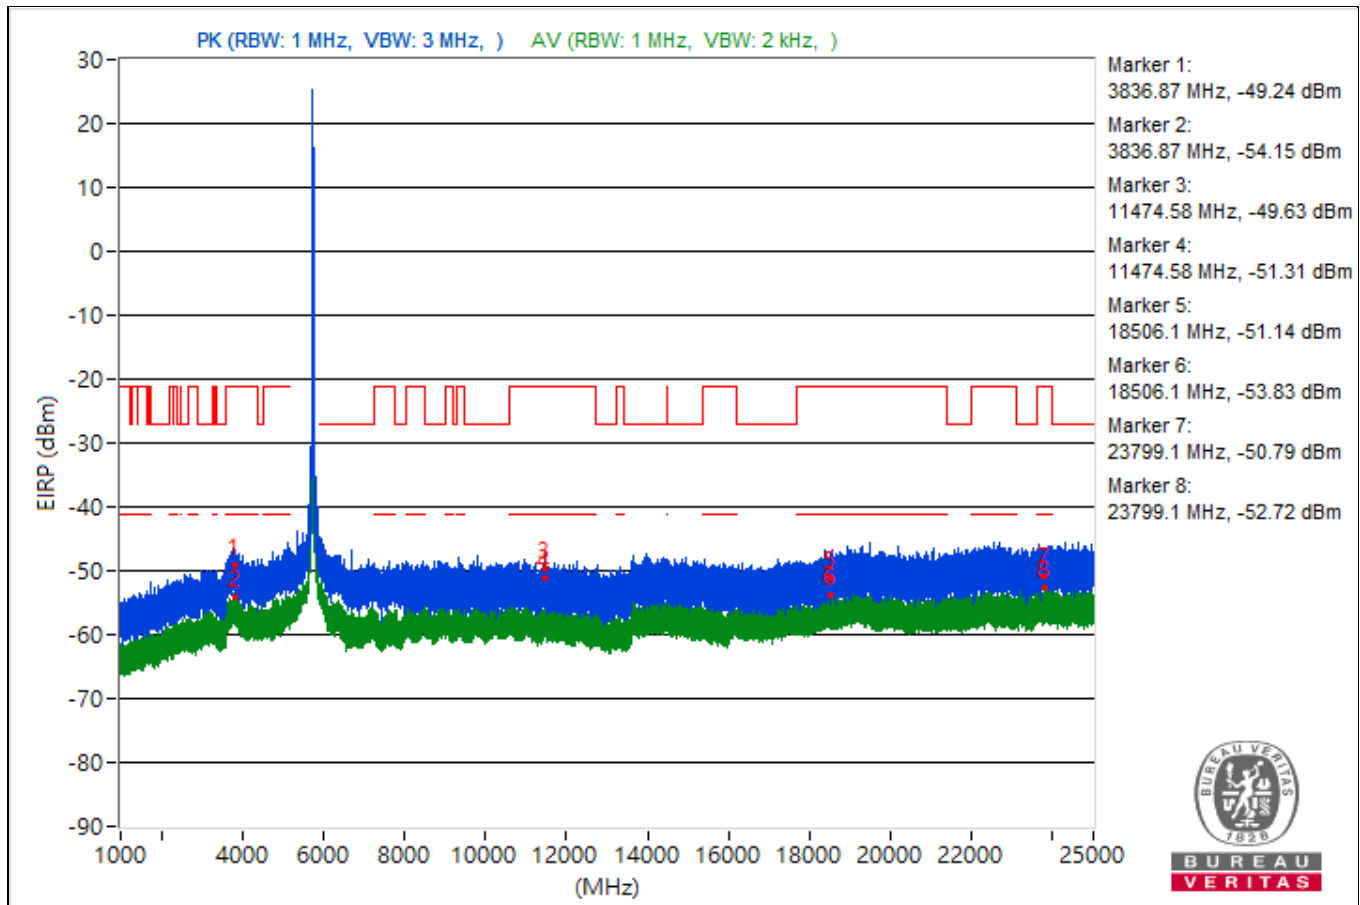


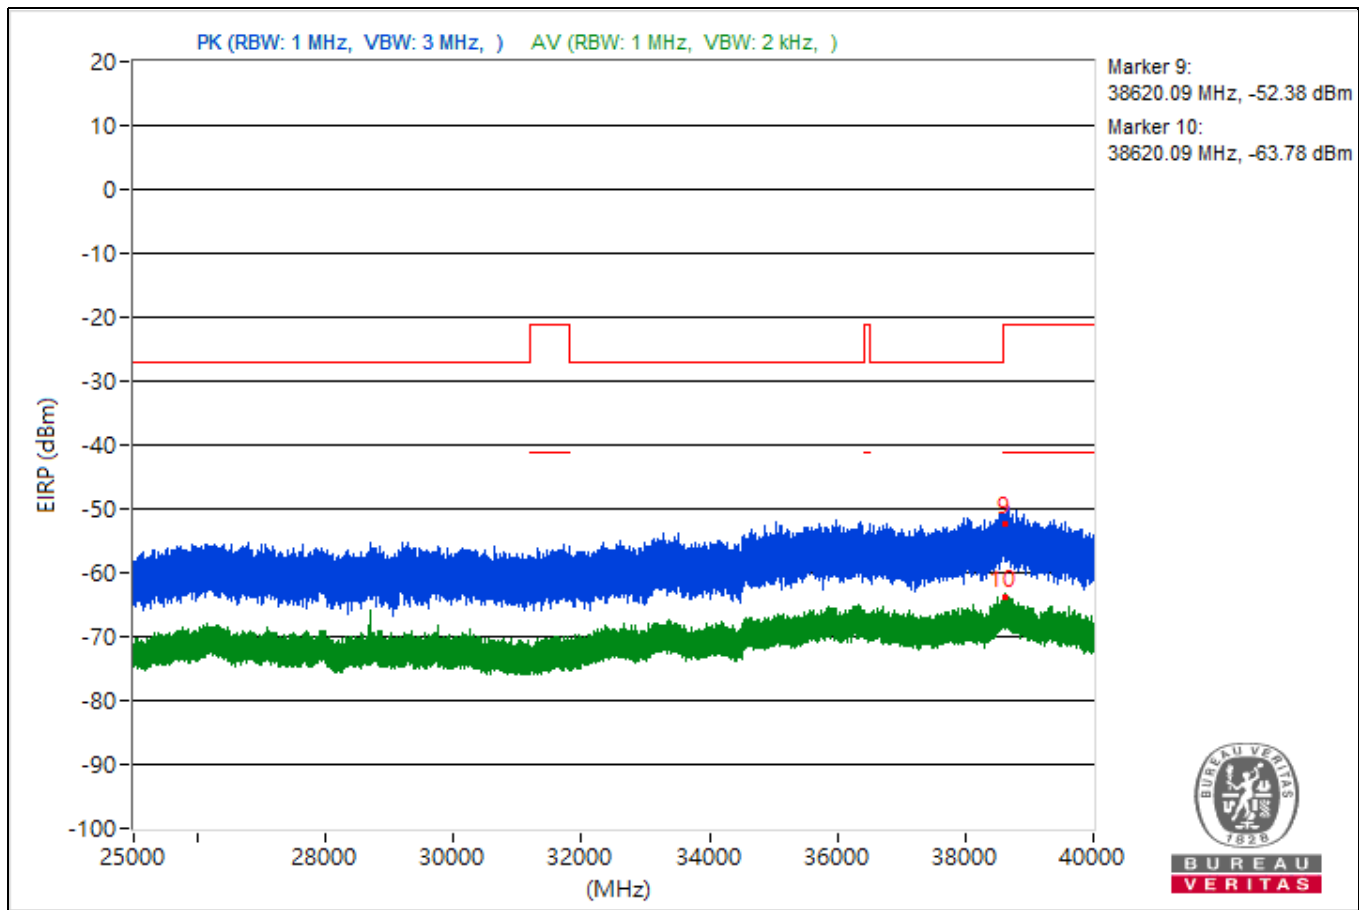


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4873.57	49.27 PK	74	-24.73	-54.12	-53.73	4.92	-45.99
2	4873.57	42.88 AV	54	-11.12	-60.59	-60.05	4.92	-52.38
3	11664.09	44.25 PK	74	-29.75	-57.57	-60.96	4.92	-51.01
4	11664.09	40.16 AV	54	-13.84	-60.96	-67.11	4.92	-55.1
5	18974.2	44.97 PK	74	-29.03	-60.14	-56.89	4.92	-50.29
6	18974.2	41.32 AV	54	-12.68	-63.78	-60.55	4.92	-53.94
7	23695.9	46.28 PK	74	-27.72	-58.55	-55.73	4.92	-48.98
8	23695.9	42.55 AV	54	-11.45	-62.36	-59.41	4.92	-52.71
9	38604.89	42.7 PK	74	-31.3	-59.49	-61.79	4.92	-52.56
10	38604.89	32.29 AV	54	-21.71	-69.23	-73.64	4.92	-62.97

Note: Margin value = Emission Level - Limit value

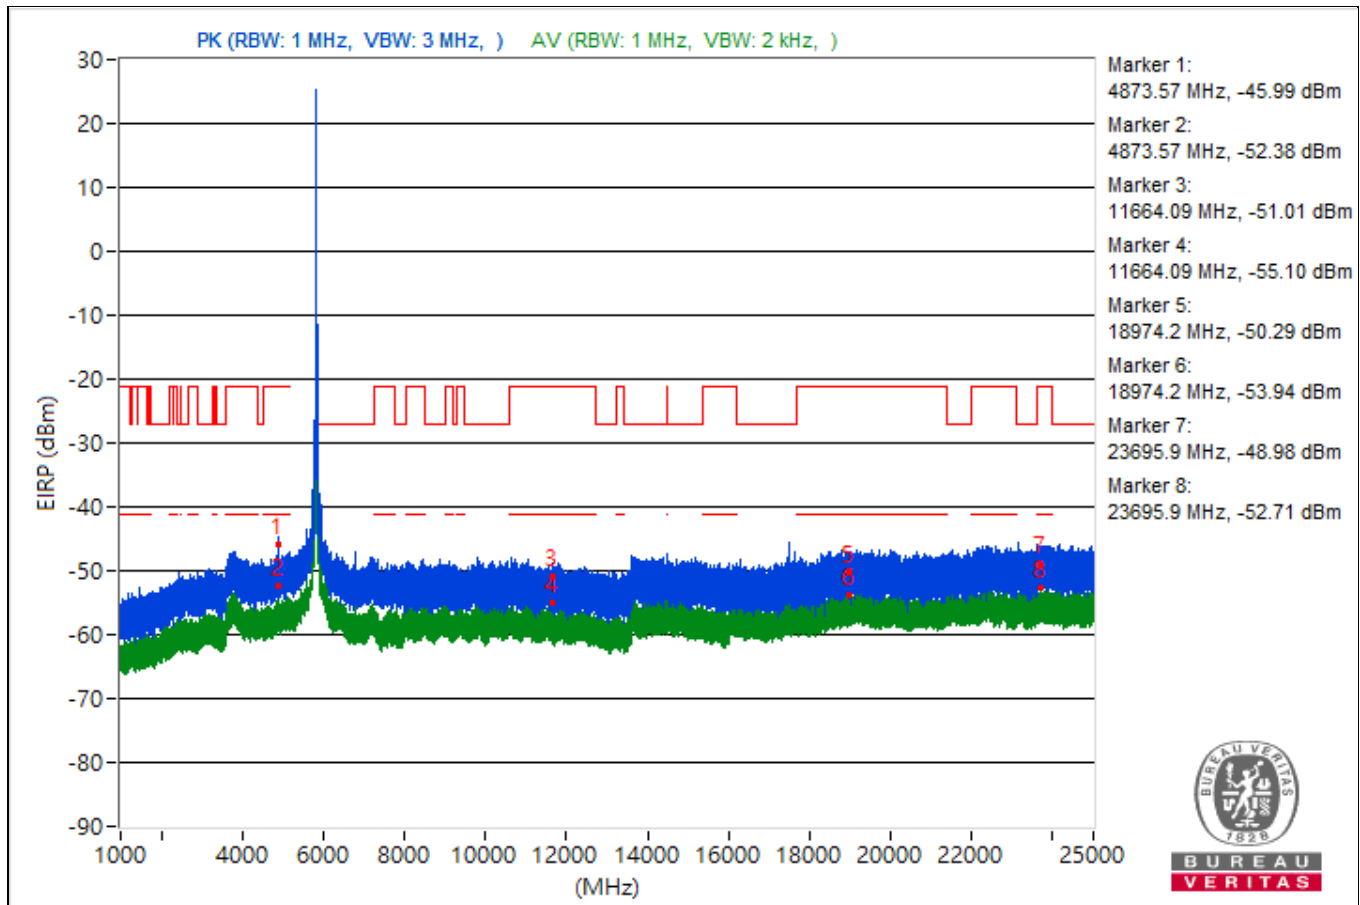


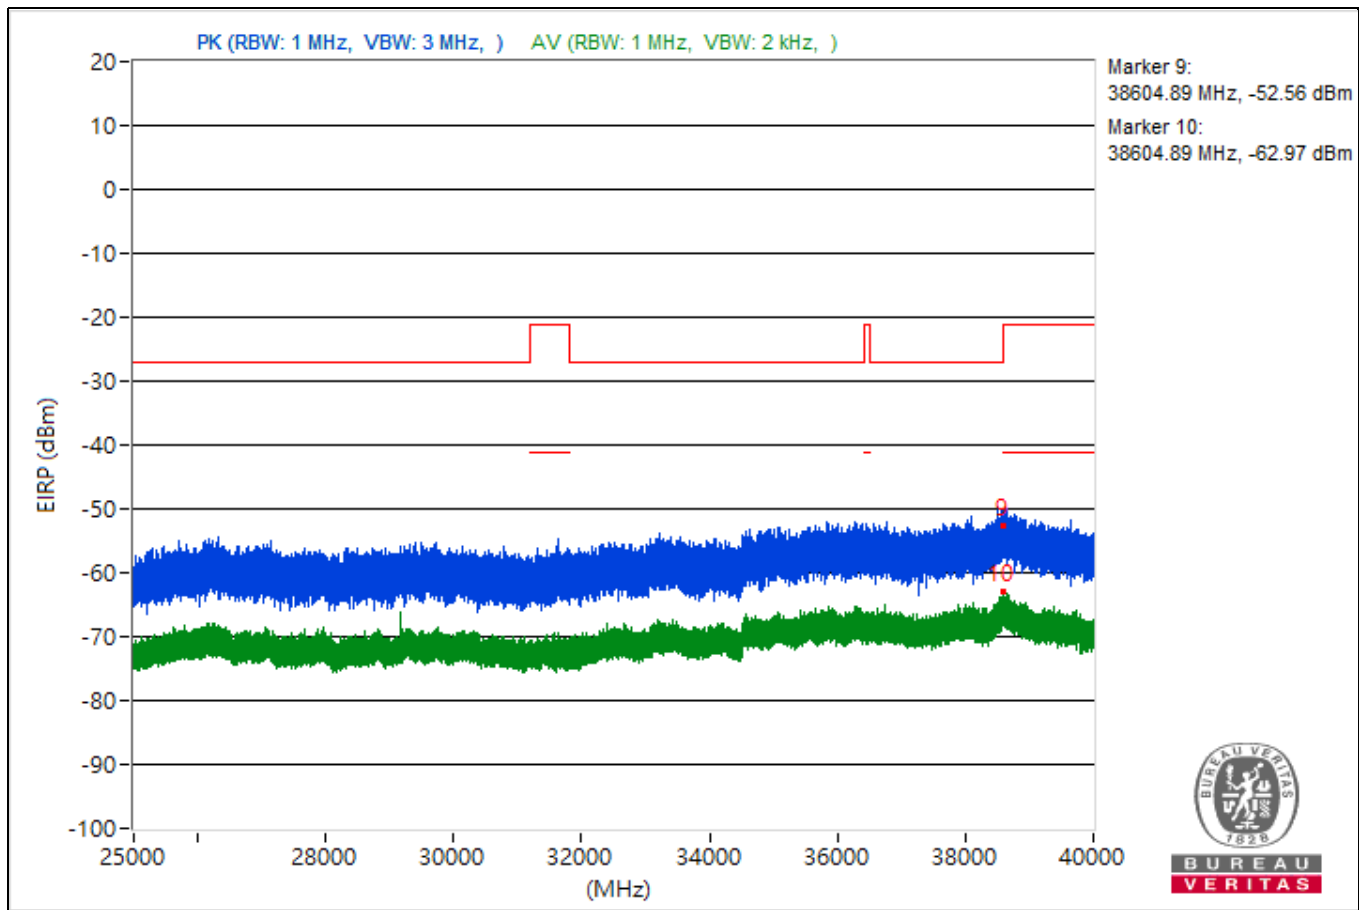


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.74	52 PK	74	-22	-52.48	-50.19	4.92	-43.26
2	5099.74	47.16 AV	54	-6.84	-56.31	-55.76	4.92	-48.1
3	9318.84	43.24 PK	74	-30.76	-60.81	-59.23	4.92	-52.02
4	9318.84	39.9 AV	54	-14.1	-65	-62.07	4.92	-55.36
5	18972.2	45.4 PK	74	-28.6	-59.8	-56.42	4.92	-49.86
6	18972.2	40.85 AV	54	-13.15	-65.54	-60.51	4.92	-54.41
7	22510.5	44.79 PK	74	-29.21	-56.81	-60.94	4.92	-50.47
8	22510.5	42.18 AV	54	-11.82	-64.15	-59.21	4.92	-53.08
9	38620.98	37.97 PK	74	-36.03	-66.62	-64.17	4.92	-57.29
10	38620.98	31.27 AV	54	-22.73	-69.93	-75.73	4.92	-63.99

Note: Margin value = Emission Level - Limit value

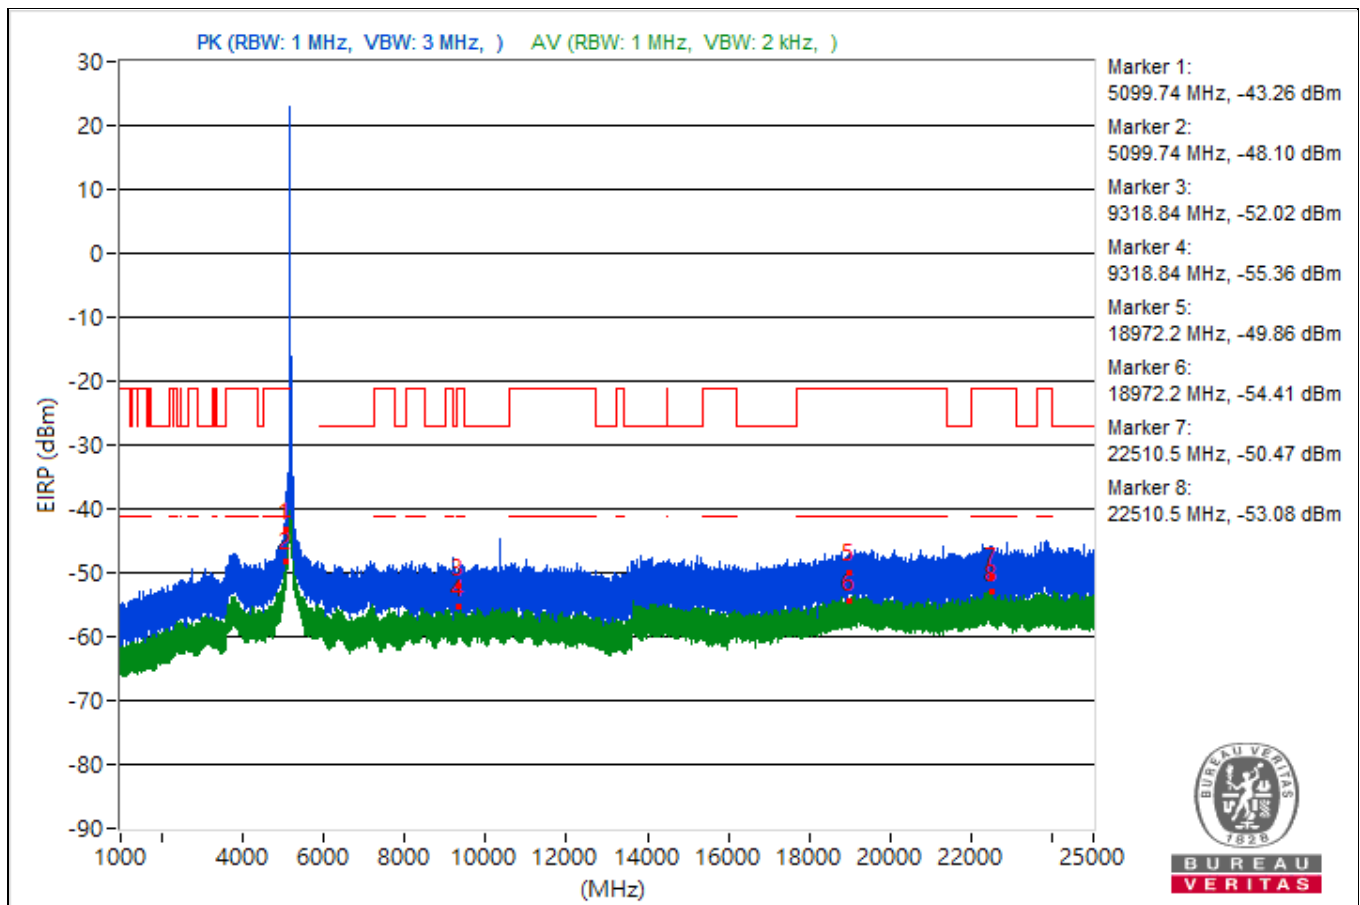

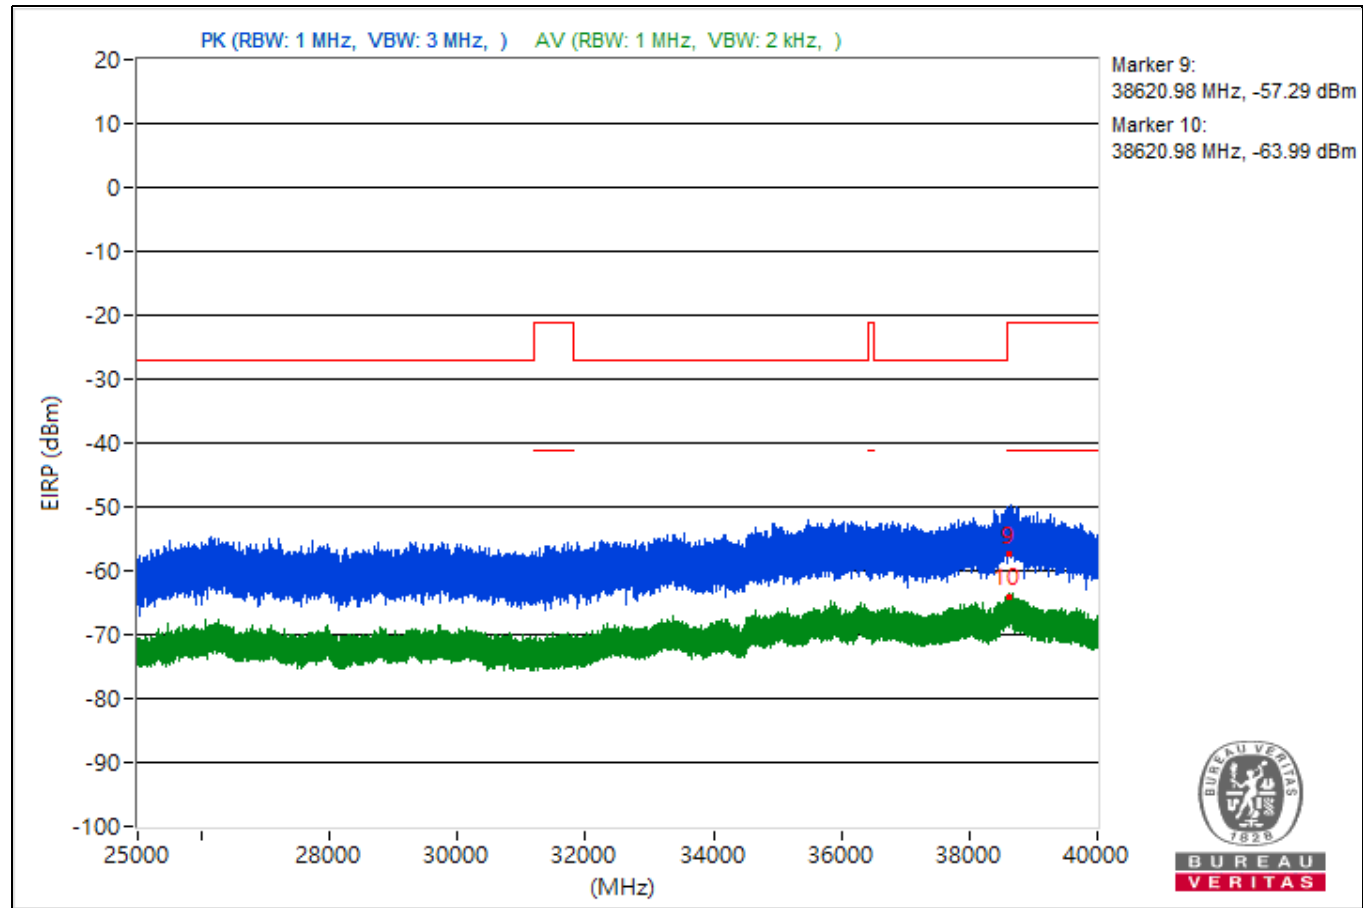

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5082.32	48.5 PK	74	-25.5	-55.76	-53.83	4.92	-46.76
2	5082.32	43.5 AV	54	-10.5	-61.12	-58.62	4.92	-51.76
3	11052	42.28 PK	74	-31.72	-60.12	-61.87	4.92	-52.98
4	11052	39.75 AV	54	-14.25	-65.71	-61.95	4.92	-55.51
5	18923.1	43.96 PK	74	-30.04	-60.95	-58	4.92	-51.3
6	18923.1	41.62 AV	54	-12.38	-59.9	-64.32	4.92	-53.64
7	23882.7	46.17 PK	74	-27.83	-55.24	-60.07	4.92	-49.09
8	23882.7	41.95 AV	54	-12.05	-64.47	-59.41	4.92	-53.31
9	38635.02	43.1 PK	74	-30.9	-59.1	-61.36	4.92	-52.16
10	38635.02	32.13 AV	54	-21.87	-72.98	-69.74	4.92	-63.13

Note: Margin value = Emission Level - Limit value

