



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.22	45.87 PK	74	-28.13	-55.65	-60.05	4.92	-49.39
2	3757.22	41.74 AV	54	-12.26	-63.03	-60.3	4.92	-53.52
3	10987.29	44.21 PK	74	-29.79	-59.16	-58.8	4.92	-51.05
4	10987.29	40.26 AV	54	-13.74	-61.86	-64.37	4.92	-55.00
5	18875	46.13 PK	74	-27.87	-56.29	-57.98	4.92	-49.13
6	18875	40.9 AV	54	-13.1	-64.95	-60.65	4.92	-54.36
7	22396.8	47.23 PK	74	-26.77	-58.11	-54.53	4.92	-48.03
8	22396.8	43.02 AV	54	-10.98	-58.94	-61.89	4.92	-52.24
9	38671.29	39.7 PK	74	-34.3	-63.56	-63.42	4.92	-55.56
10	38671.29	31.52 AV	54	-22.48	-74.23	-70.07	4.92	-63.74

Note: Margin value = Emission Level - Limit value

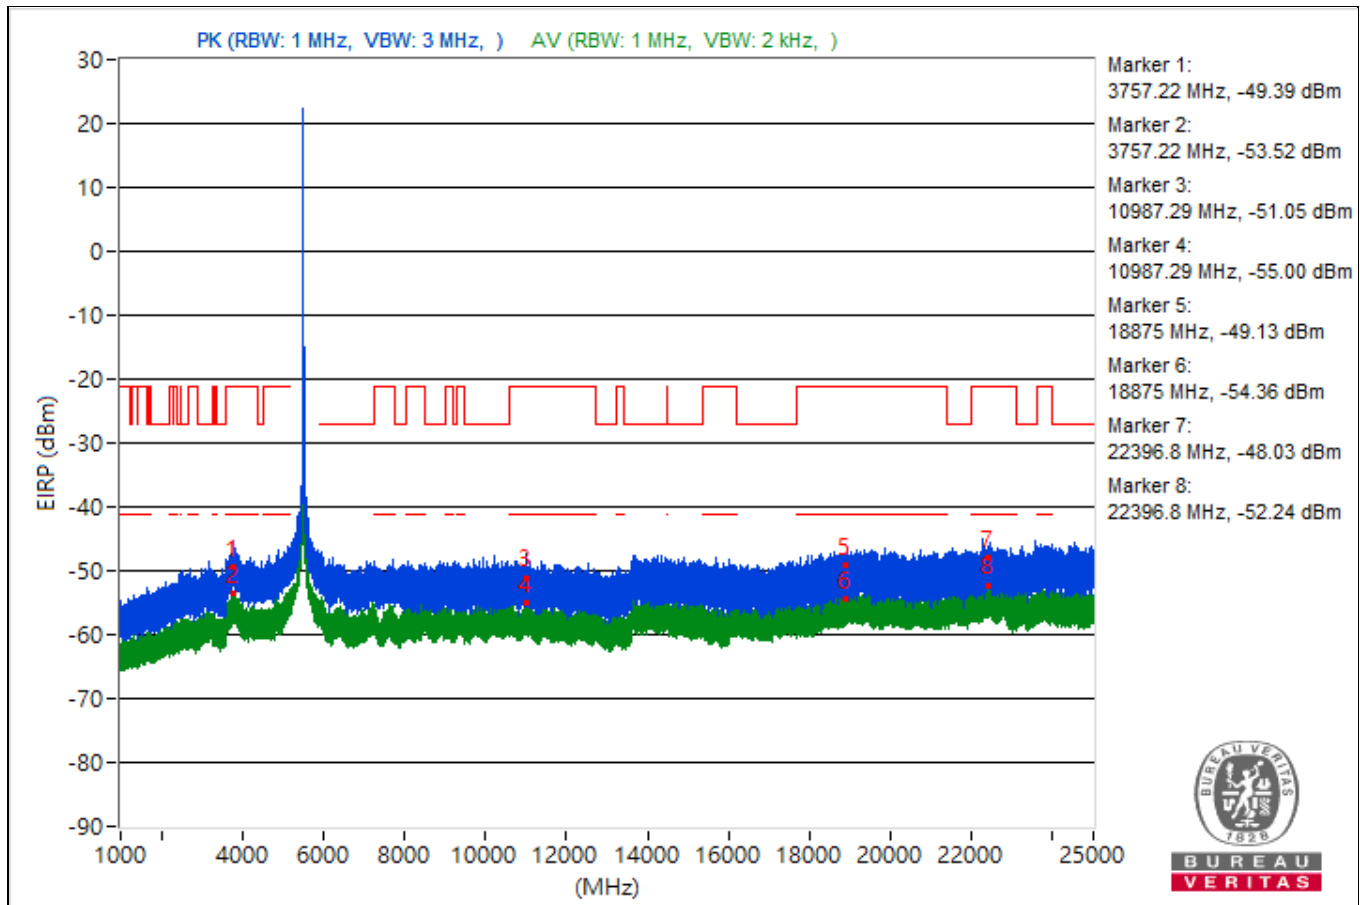


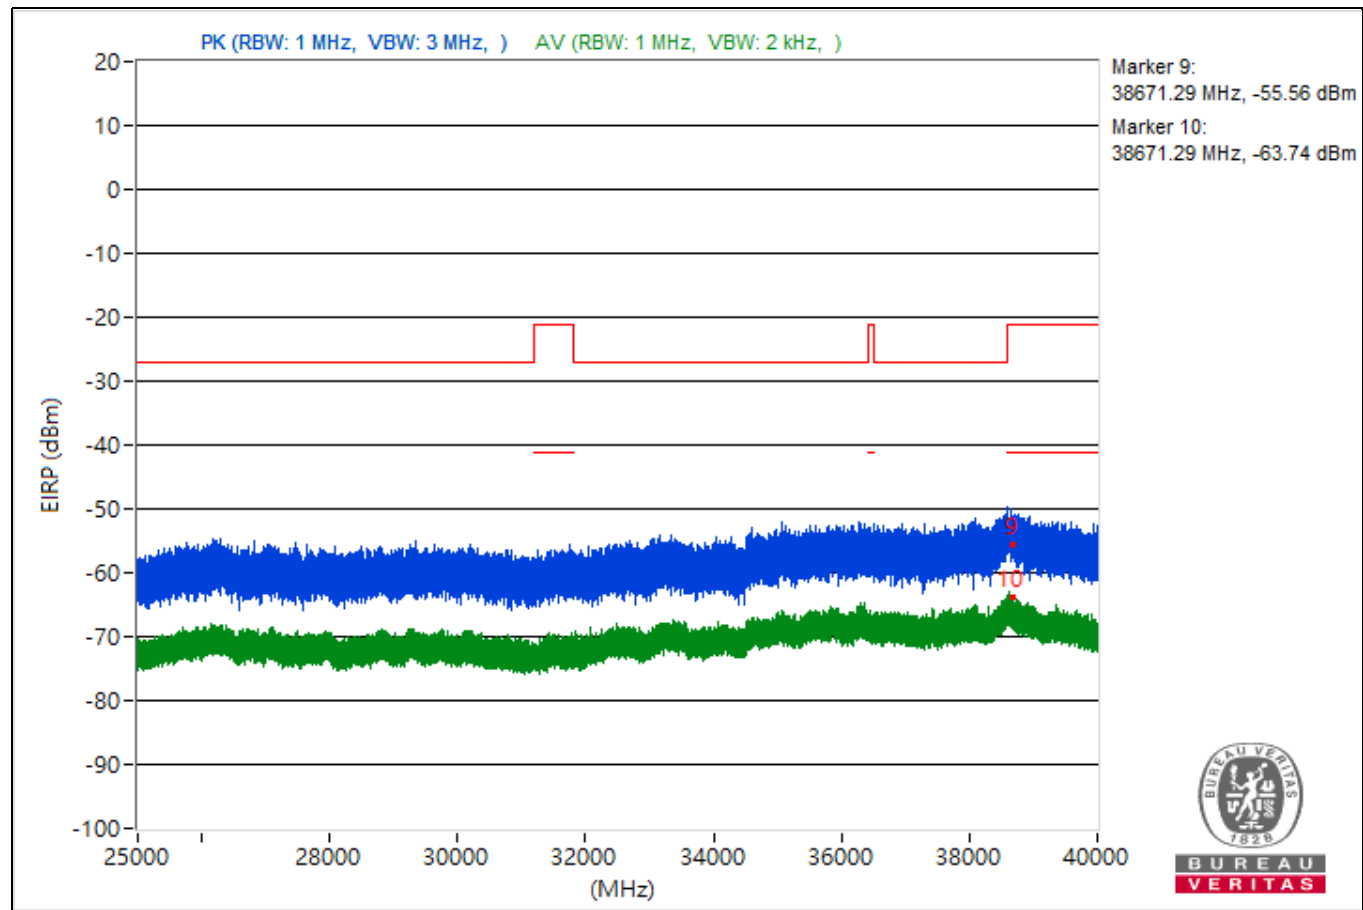


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3831.03	46.79 PK	74	-27.21	-56.74	-56.08	4.92	-48.47
2	3831.03	40.84 AV	54	-13.16	-65.81	-60.45	4.92	-54.42
3	10650.13	44.49 PK	74	-29.51	-62.37	-56.74	4.92	-50.77
4	10650.13	39.76 AV	54	-14.24	-66.67	-61.59	4.92	-55.5
5	18971.9	45.48 PK	74	-28.52	-56.44	-59.52	4.92	-49.78
6	18971.9	41.92 AV	54	-12.08	-62.74	-60.17	4.92	-53.34
7	22208.7	43.07 PK	74	-30.93	-59.39	-61	4.92	-52.19
8	22208.7	42.83 AV	54	-11.17	-61.99	-59.18	4.92	-52.43
9	38617.42	41.09 PK	74	-32.91	-61.27	-63.14	4.92	-54.17
10	38617.42	30.74 AV	54	-23.26	-70.62	-75.68	4.92	-64.52

Note: Margin value = Emission Level - Limit value

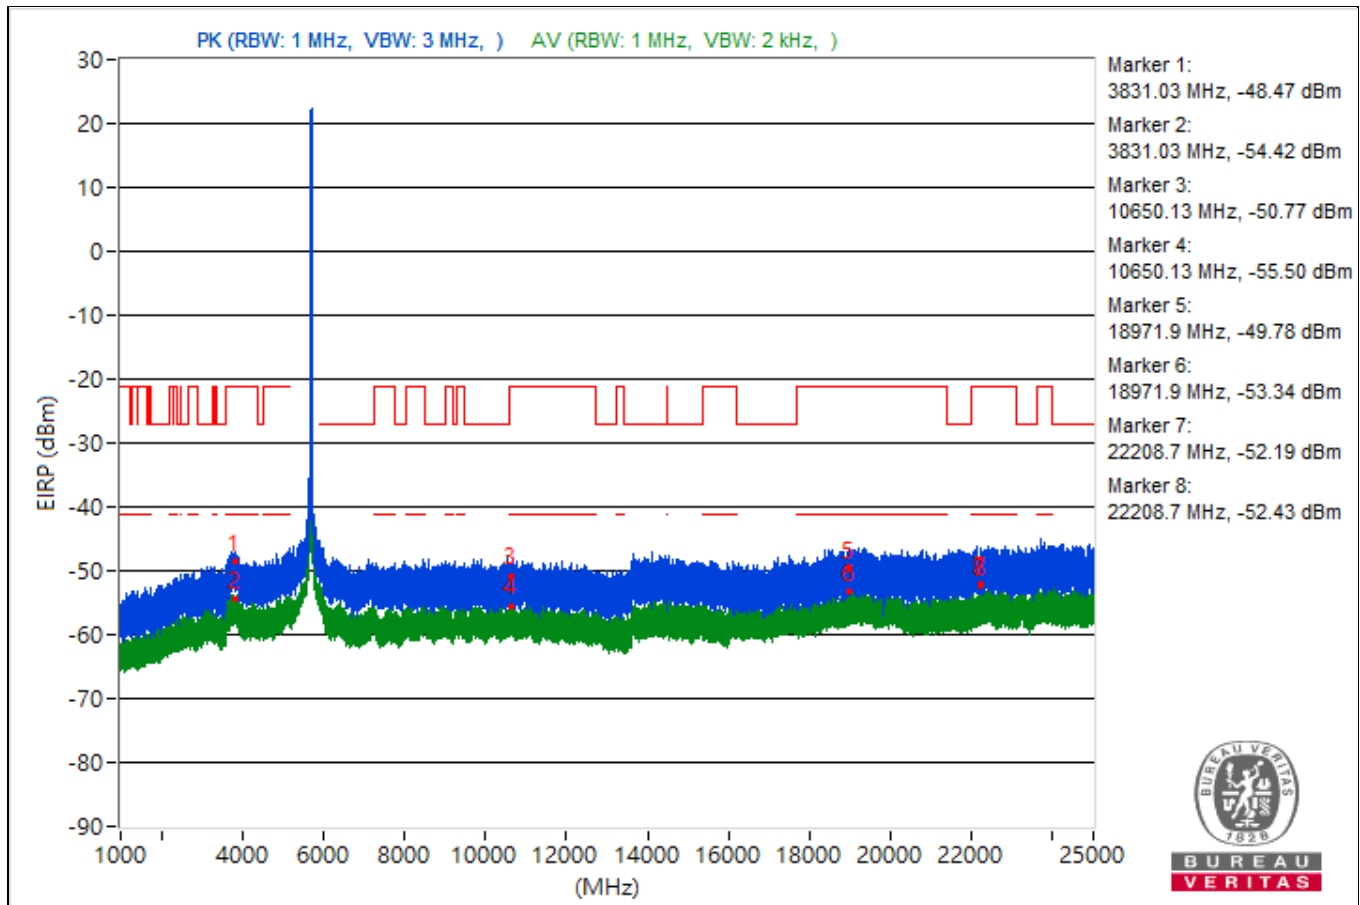


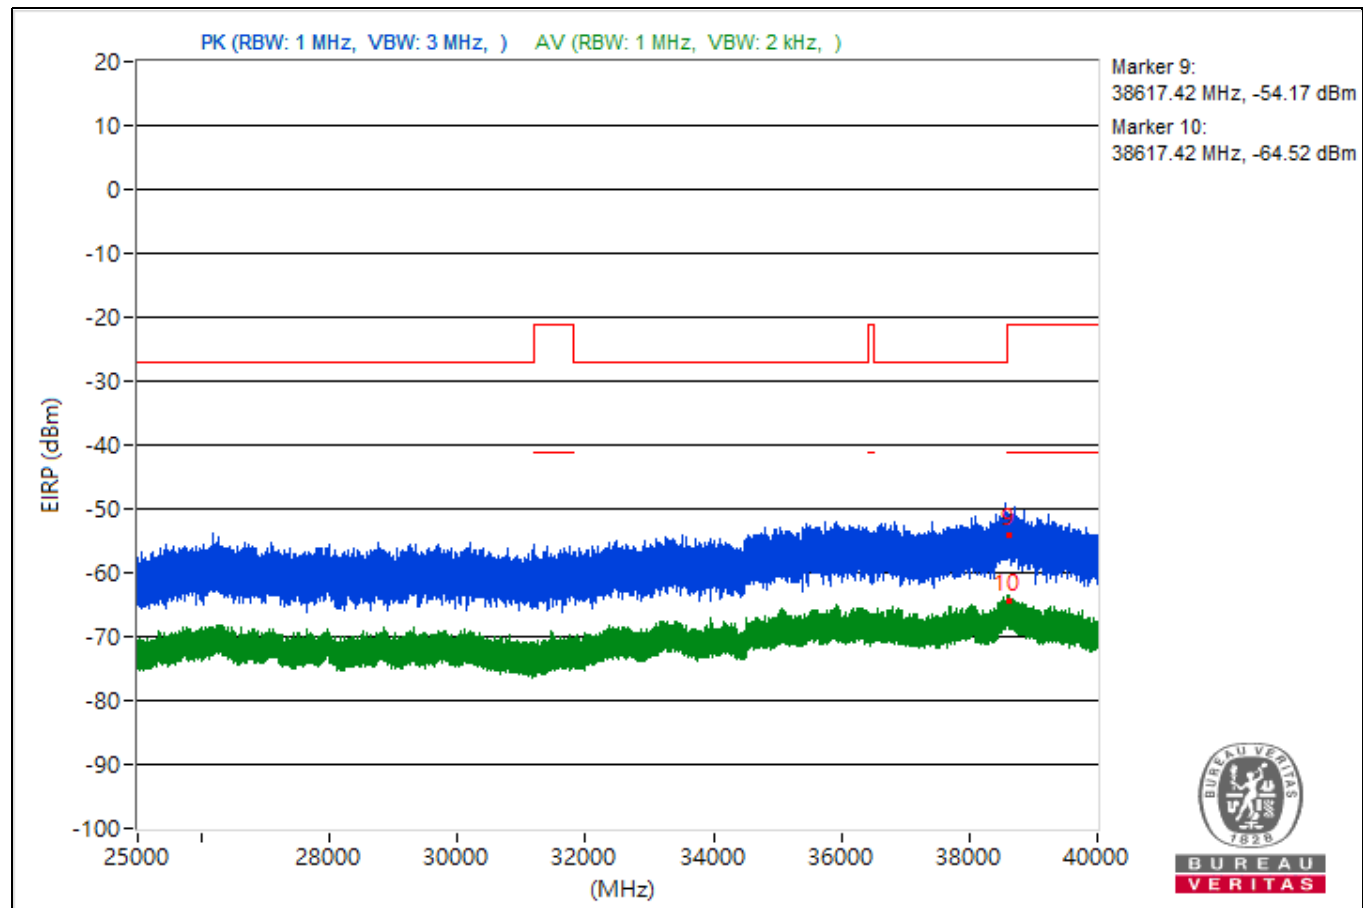


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.82	45.71 PK	74	-28.29	-57.38	-57.59	4.92	-49.55
2	3825.82	41.5 AV	54	-12.5	-64.6	-59.96	4.92	-53.76
3	11024.71	42.89 PK	74	-31.11	-60.31	-60.29	4.92	-52.37
4	11024.71	40.06 AV	54	-13.94	-64.95	-61.86	4.92	-55.2
5	18386.8	45.53 PK	74	-28.47	-56.98	-58.47	4.92	-49.73
6	18386.8	41.9 AV	54	-12.1	-62.74	-60.2	4.92	-53.36
7	23806.4	45.39 PK	74	-28.61	-58.78	-57	4.92	-49.87
8	23806.4	42.04 AV	54	-11.96	-64.95	-59.16	4.92	-53.22
9	38797.69	39.33 PK	74	-34.67	-66.79	-62.13	4.92	-55.93
10	38797.69	31.46 AV	54	-22.54	-73.98	-70.25	4.92	-63.8

Note: Margin value = Emission Level - Limit value

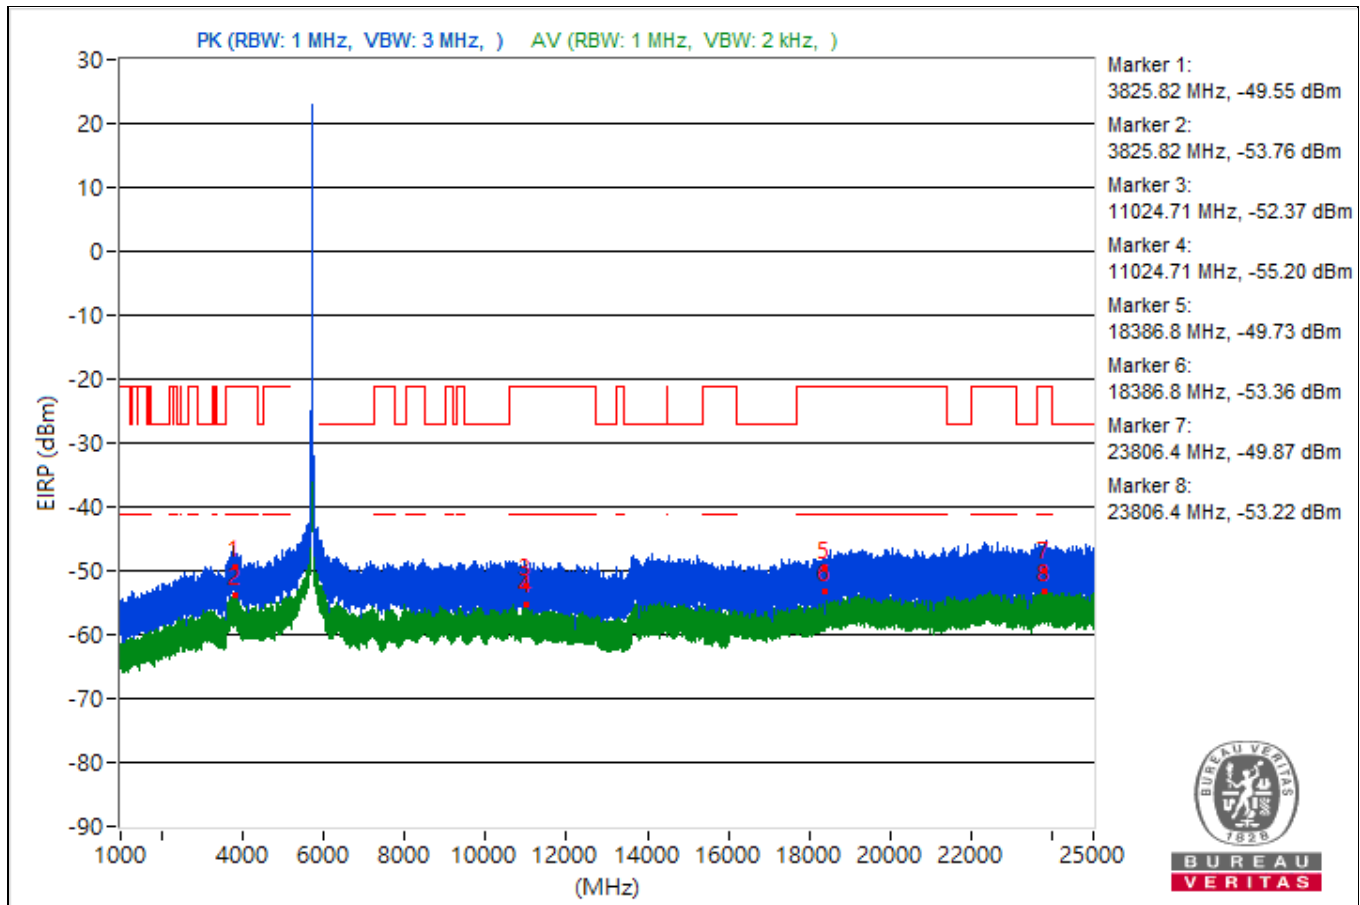


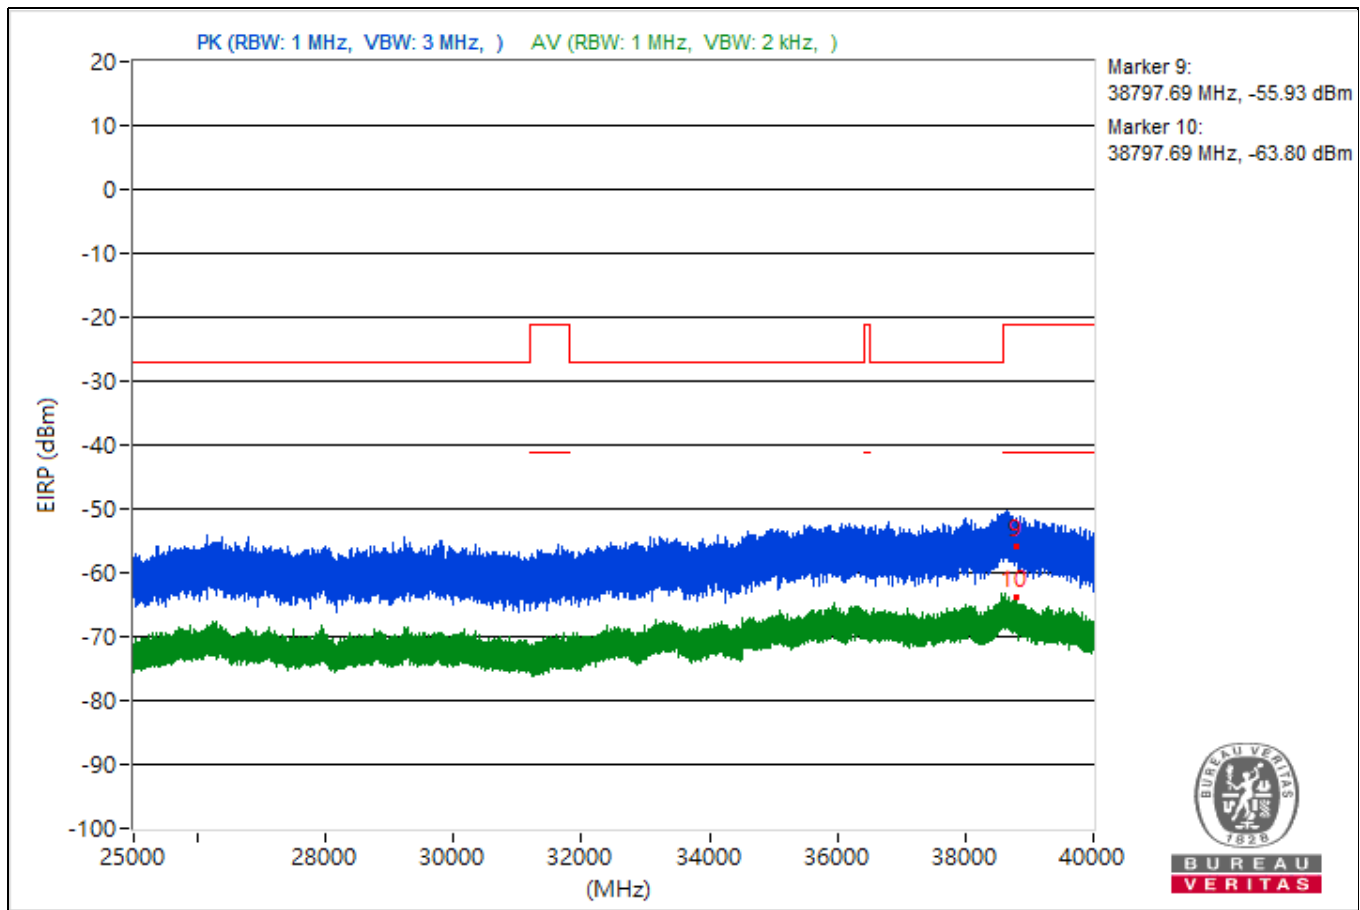


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3822.17	45.63 PK	74	-28.37	-57.41	-57.71	4.92	-49.63
2	3822.17	41.24 AV	54	-12.76	-60.51	-64.11	4.92	-54.02
3	11479.38	45.8 PK	74	-28.2	-56.04	-59.37	4.92	-49.46
4	11479.38	40.66 AV	54	-13.34	-60.74	-65.61	4.92	-54.6
5	18994	45.36 PK	74	-28.64	-59.63	-56.57	4.92	-49.9
6	18994	41 AV	54	-13	-60.61	-64.68	4.92	-54.26
7	23842.6	46.75 PK	74	-27.25	-57	-55.94	4.92	-48.51
8	23842.6	42.32 AV	54	-11.68	-59.61	-62.66	4.92	-52.94
9	38636.62	39.7 PK	74	-34.3	-65.19	-62.26	4.92	-55.56
10	38636.62	31.63 AV	54	-22.37	-70.19	-73.57	4.92	-63.63

Note: Margin value = Emission Level - Limit value

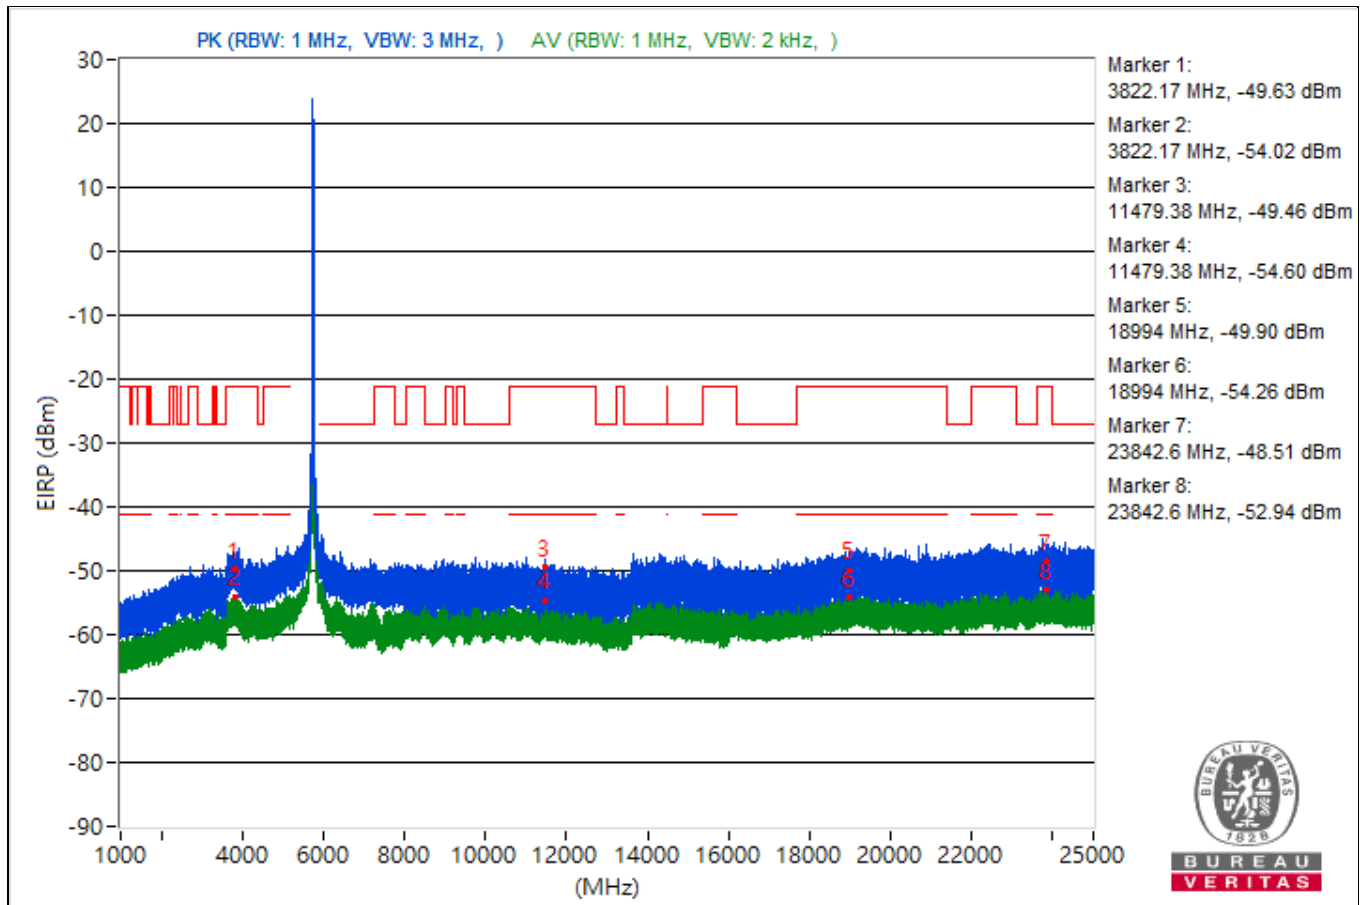


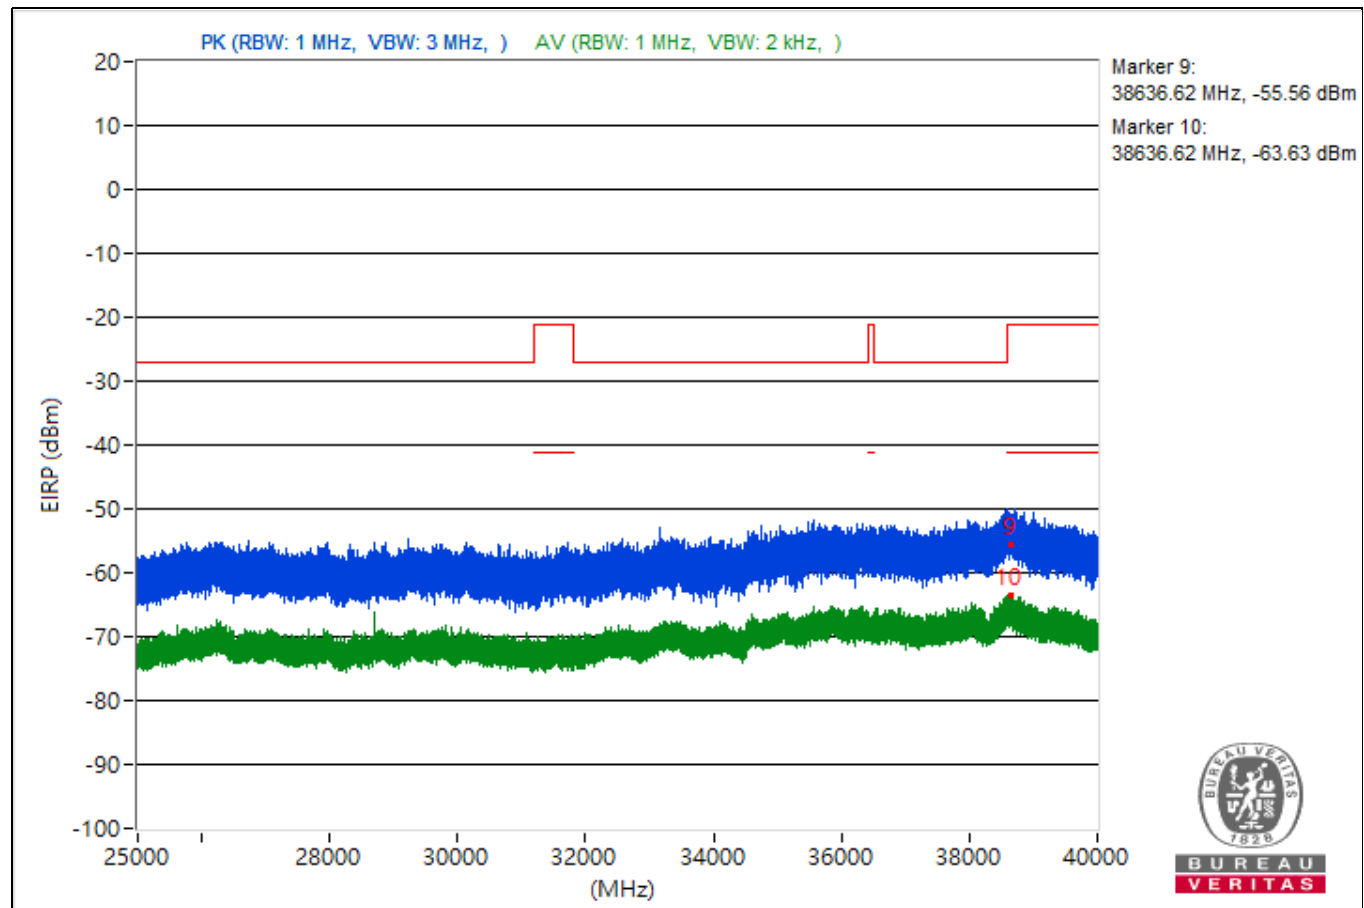


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.13	42.45 PK	74	-31.55	-61.39	-60.18	4.92	-52.81
2	3763.13	42.22 AV	54	-11.78	-61.33	-60.64	4.92	-53.04
3	8490.67	43.6 PK	74	-30.4	-59.44	-59.73	4.92	-51.66
4	8490.67	40.29 AV	54	-13.71	-65	-61.49	4.92	-54.97
5	18945.3	45.16 PK	74	-28.84	-57.33	-58.86	4.92	-50.1
6	18945.3	41.25 AV	54	-12.75	-64.13	-60.49	4.92	-54.01
7	23892.6	46.49 PK	74	-27.51	-59.24	-55.11	4.92	-48.77
8	23892.6	42.53 AV	54	-11.47	-62	-59.63	4.92	-52.73
9	38640.09	45.68 PK	74	-28.32	-59.66	-56.08	4.92	-49.58
10	38640.09	31.01 AV	54	-22.99	-70.68	-74.49	4.92	-64.25

Note: Margin value = Emission Level - Limit value

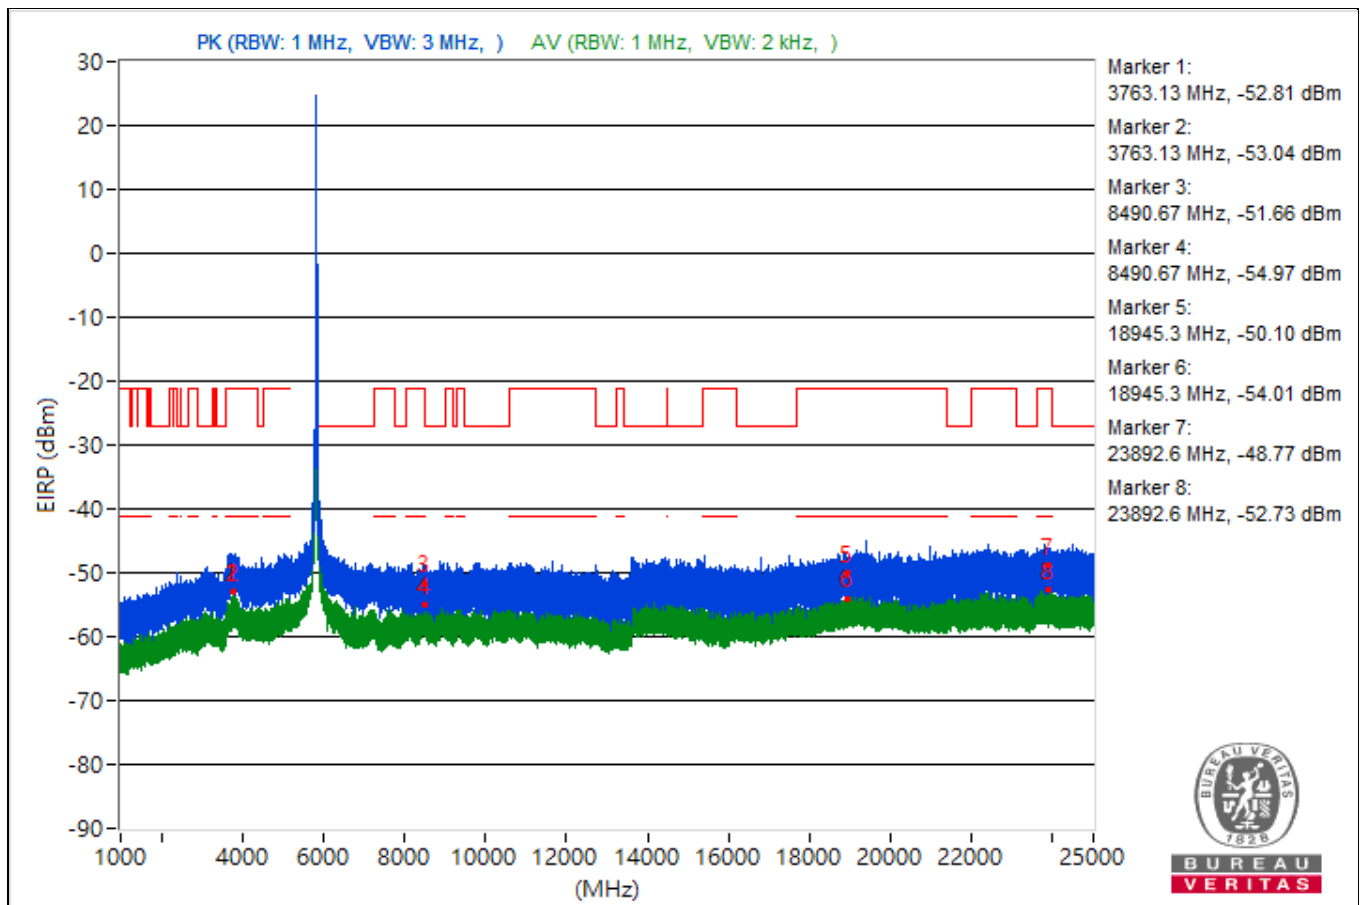


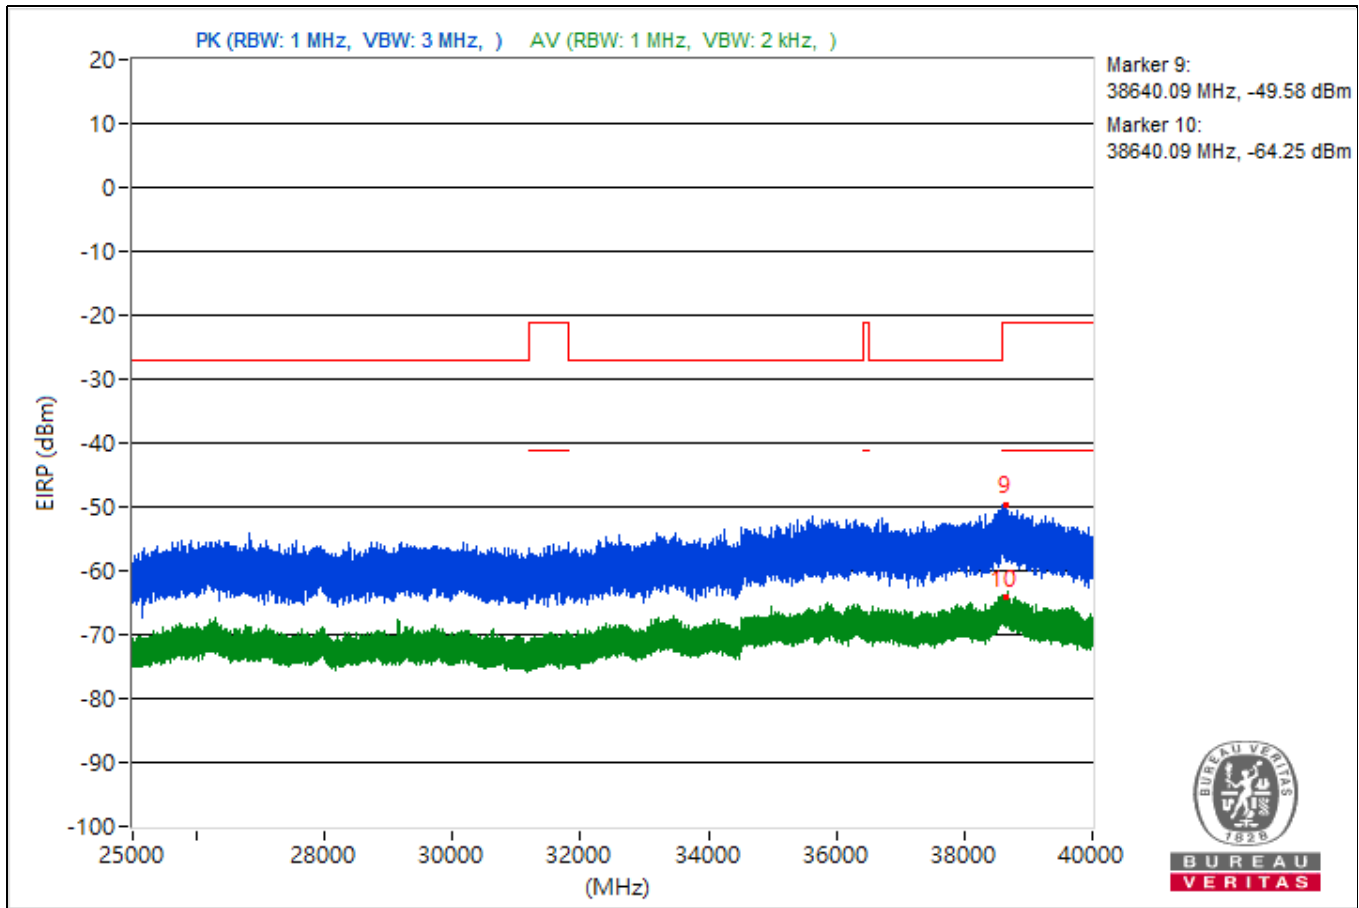


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5055.41	49.79 PK	74	-24.21	-53.97	-52.9	4.92	-45.47
2	5055.41	45.5 AV	54	-8.5	-57.99	-57.4	4.92	-49.76
3	11142.67	43.04 PK	74	-30.96	-60.6	-59.74	4.92	-52.22
4	11142.67	40.25 AV	54	-13.75	-61.5	-65.11	4.92	-55.01
5	18763	42.69 PK	74	-31.31	-62.64	-59.07	4.92	-52.57
6	18763	40.71 AV	54	-13.29	-61.14	-64.42	4.92	-54.55
7	22105	44.86 PK	74	-29.14	-62.51	-56.25	4.92	-50.4
8	22105	42.04 AV	54	-11.96	-65	-59.14	4.92	-53.22
9	38688.71	38.7 PK	74	-35.3	-64.99	-64.05	4.92	-56.56
10	38688.71	31.25 AV	54	-22.75	-70.09	-75.24	4.92	-64.01

Note: Margin value = Emission Level - Limit value

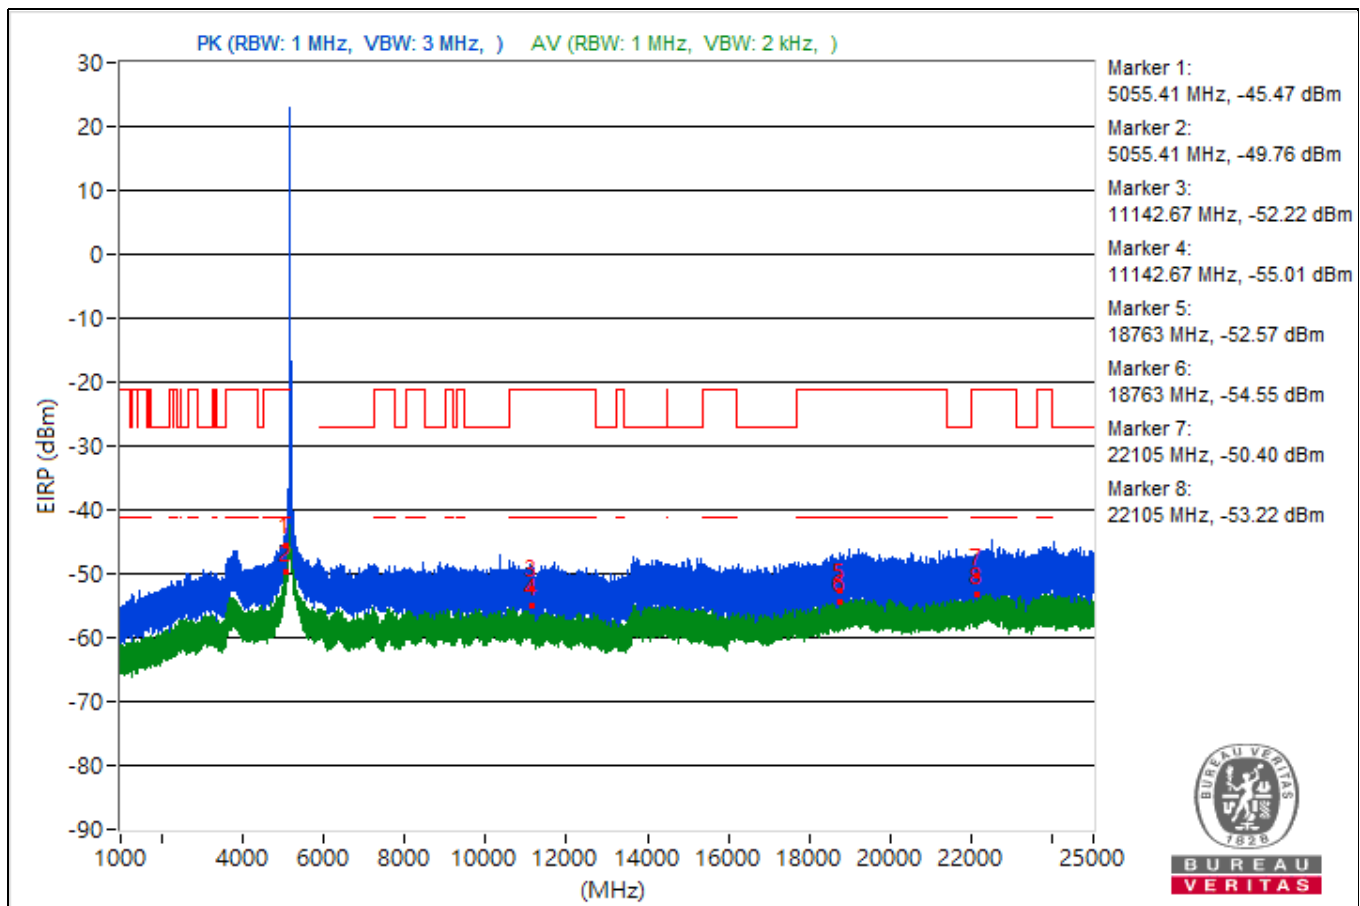


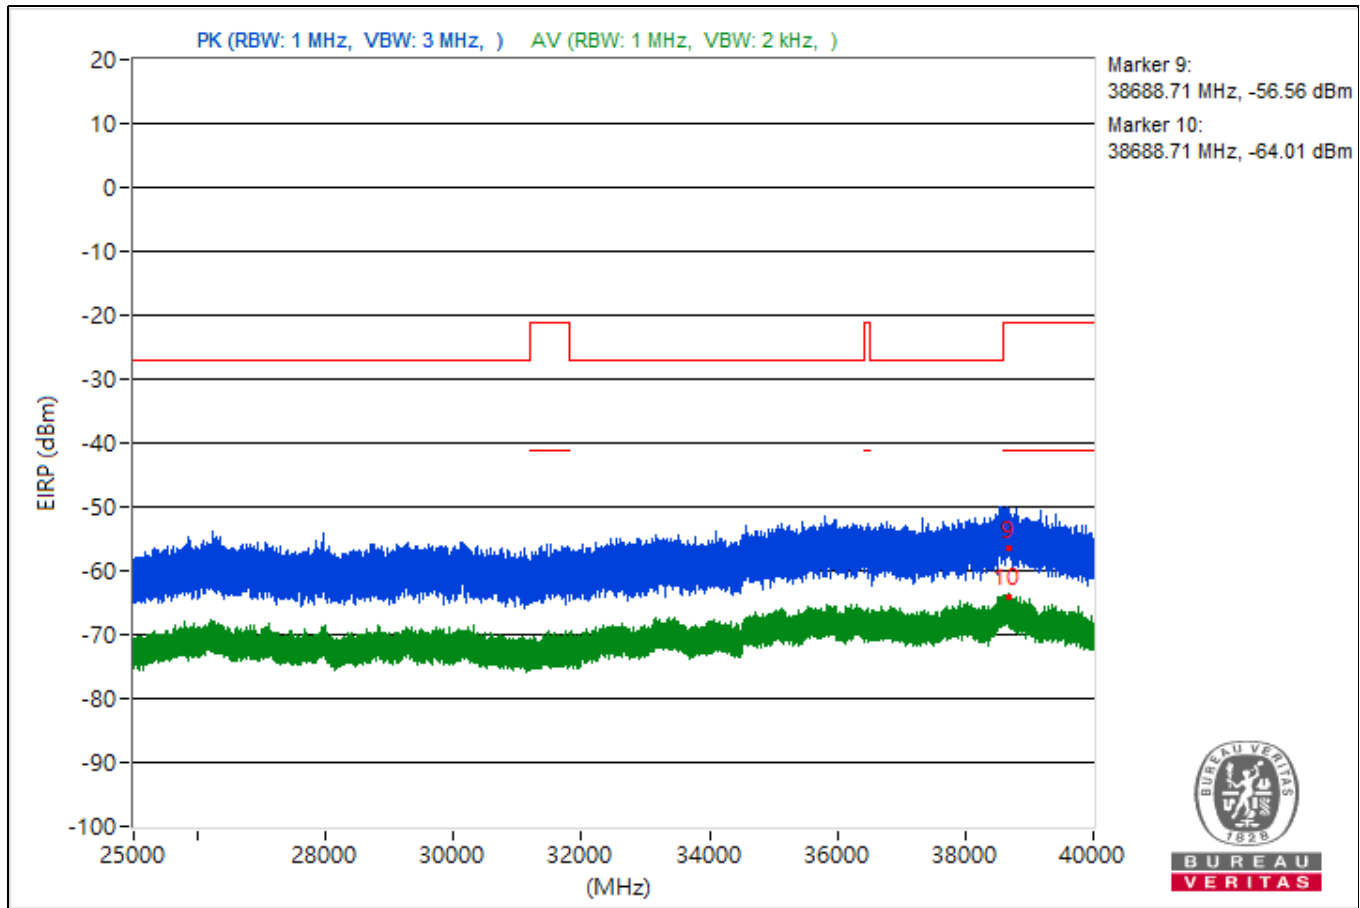


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.04	49.07 PK	74	-24.93	-52.61	-56.44	4.92	-46.19
2	5099.04	44.05 AV	54	-9.95	-59.78	-58.58	4.92	-51.21
3	10686.31	44.95 PK	74	-29.05	-57.27	-59.5	4.92	-50.31
4	10686.31	40.3 AV	54	-13.7	-64.47	-61.73	4.92	-54.96
5	18964.2	45.63 PK	74	-28.37	-56.41	-59.14	4.92	-49.63
6	18964.2	42.54 AV	54	-11.46	-60.55	-60.76	4.92	-52.72
7	22314.8	44.95 PK	74	-29.05	-56.39	-61.54	4.92	-50.31
8	22314.8	42.47 AV	54	-11.53	-62.69	-59.37	4.92	-52.79
9	38626.4	41.39 PK	74	-32.61	-61.06	-62.69	4.92	-53.87
10	38626.4	31.54 AV	54	-22.46	-70.55	-73.12	4.92	-63.72

Note: Margin value = Emission Level - Limit value

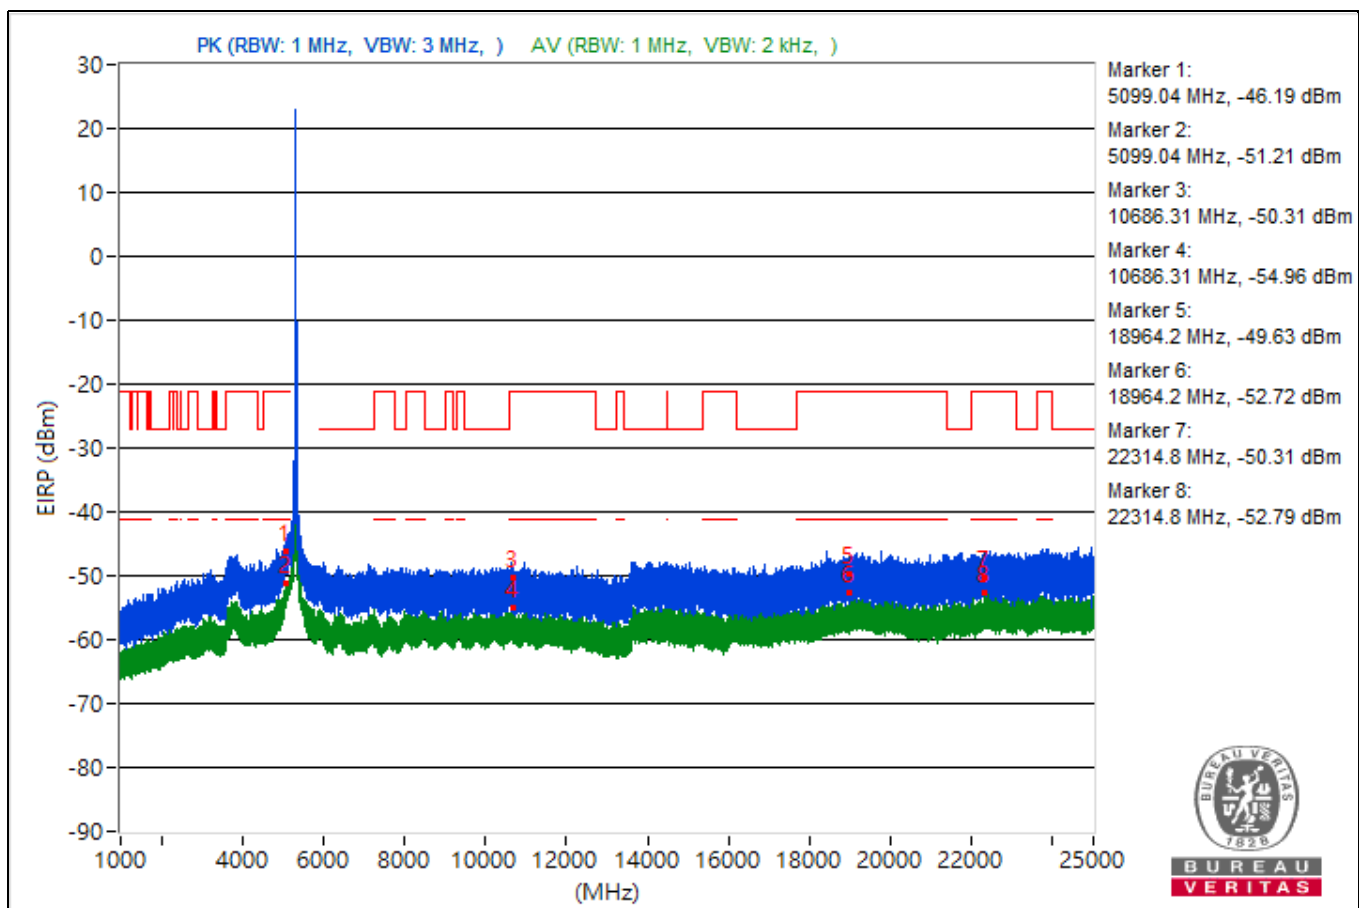


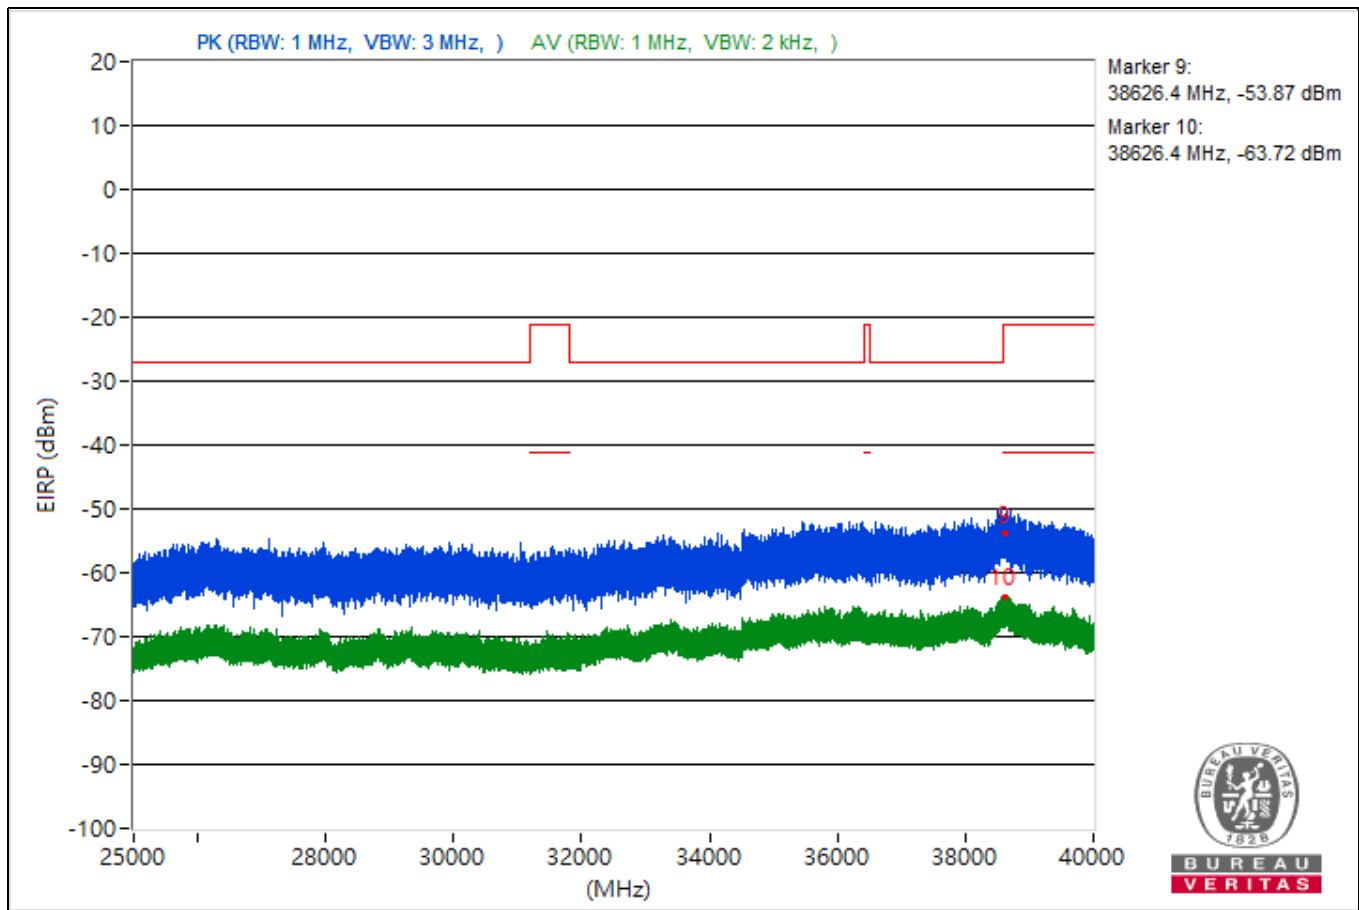


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3844.88	44.22 PK	74	-29.78	-60.15	-58.05	4.92	-51.04
2	3844.88	41.44 AV	54	-12.56	-63.25	-60.63	4.92	-53.82
3	10990.22	43.57 PK	74	-30.43	-58.02	-62.19	4.92	-51.69
4	10990.22	40.12 AV	54	-13.88	-61.85	-64.78	4.92	-55.14
5	18985.3	43.78 PK	74	-30.22	-58.41	-60.7	4.92	-51.48
6	18985.3	40.49 AV	54	-13.51	-65.96	-60.86	4.92	-54.77
7	22434.3	43.21 PK	74	-30.79	-62.07	-58.57	4.92	-52.05
8	22434.3	42.49 AV	54	-11.51	-59.44	-62.48	4.92	-52.77
9	38638.67	42.03 PK	74	-31.97	-59.48	-63.94	4.92	-53.23
10	38638.67	31.43 AV	54	-22.57	-70.43	-73.67	4.92	-63.83

Note: Margin value = Emission Level - Limit value

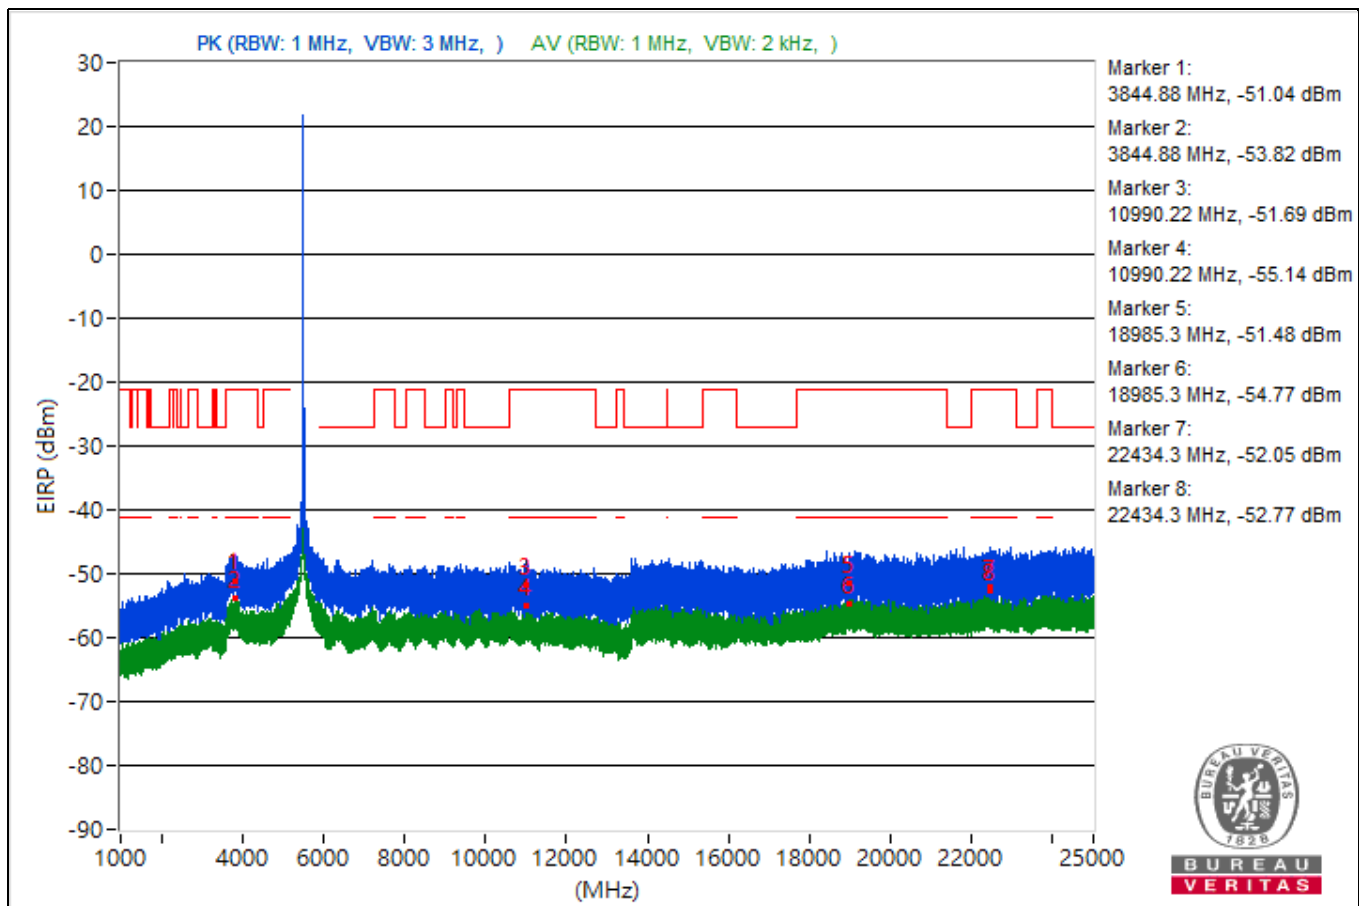


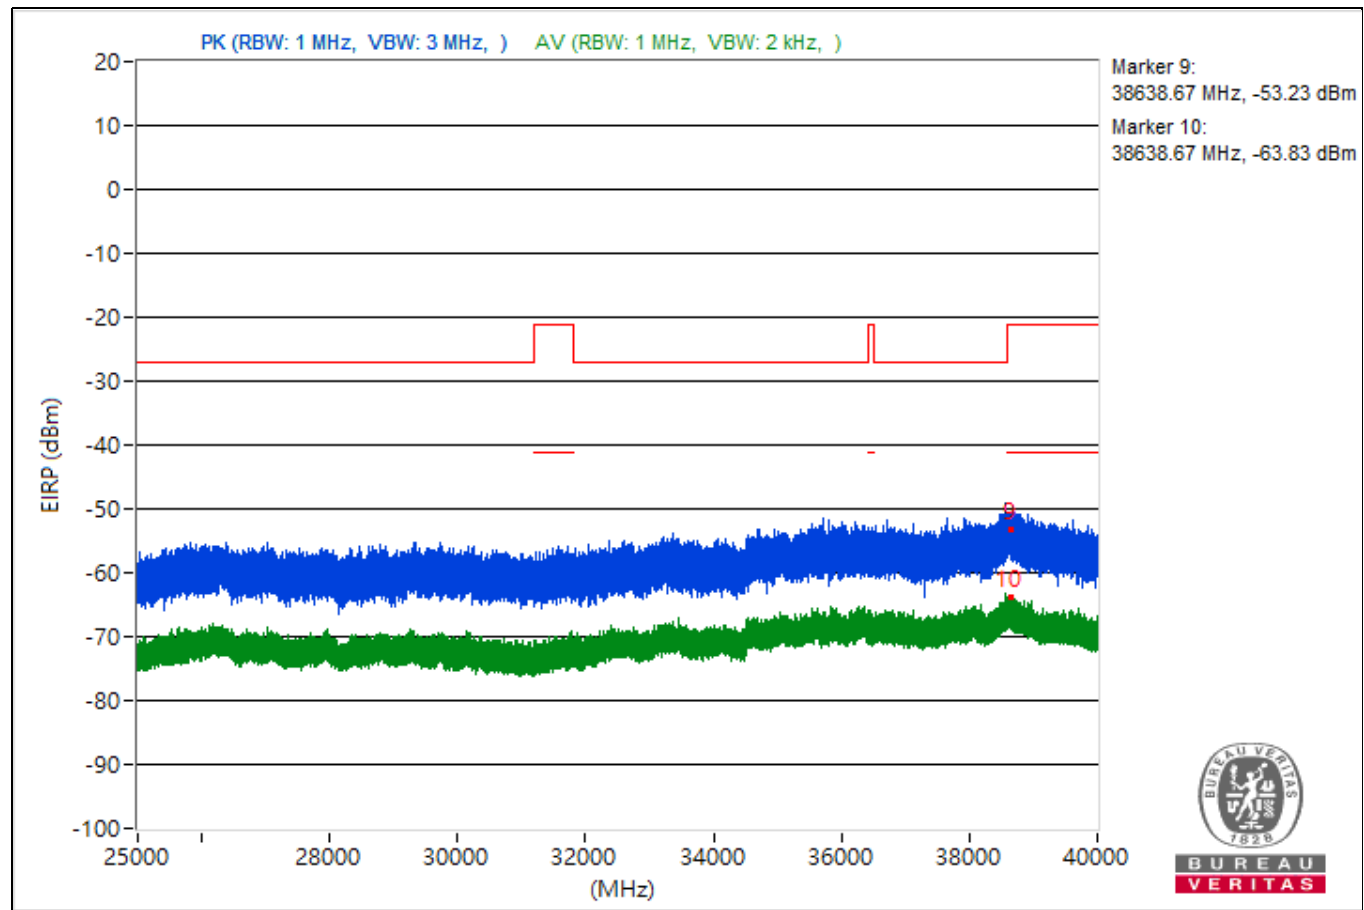


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3884.54	45.58 PK	74	-28.42	-57.69	-57.54	4.92	-49.68
2	3884.54	41.05 AV	54	-12.95	-61.05	-63.59	4.92	-54.21
3	9359.11	43.99 PK	74	-30.01	-58.46	-60.1	4.92	-51.27
4	9359.11	39.93 AV	54	-14.07	-65.4	-61.83	4.92	-55.33
5	18736.2	43.62 PK	74	-30.38	-58.33	-61.33	4.92	-51.64
6	18736.2	41.31 AV	54	-12.69	-61.15	-62.76	4.92	-53.95
7	22361.6	47.2 PK	74	-26.8	-54.48	-58.31	4.92	-48.06
8	22361.6	42.19 AV	54	-11.81	-58.99	-64.88	4.92	-53.07
9	38608.62	42.05 PK	74	-31.95	-61.93	-60.47	4.92	-53.21
10	38608.62	32.14 AV	54	-21.86	-70.27	-72	4.92	-63.12

Note: Margin value = Emission Level - Limit value

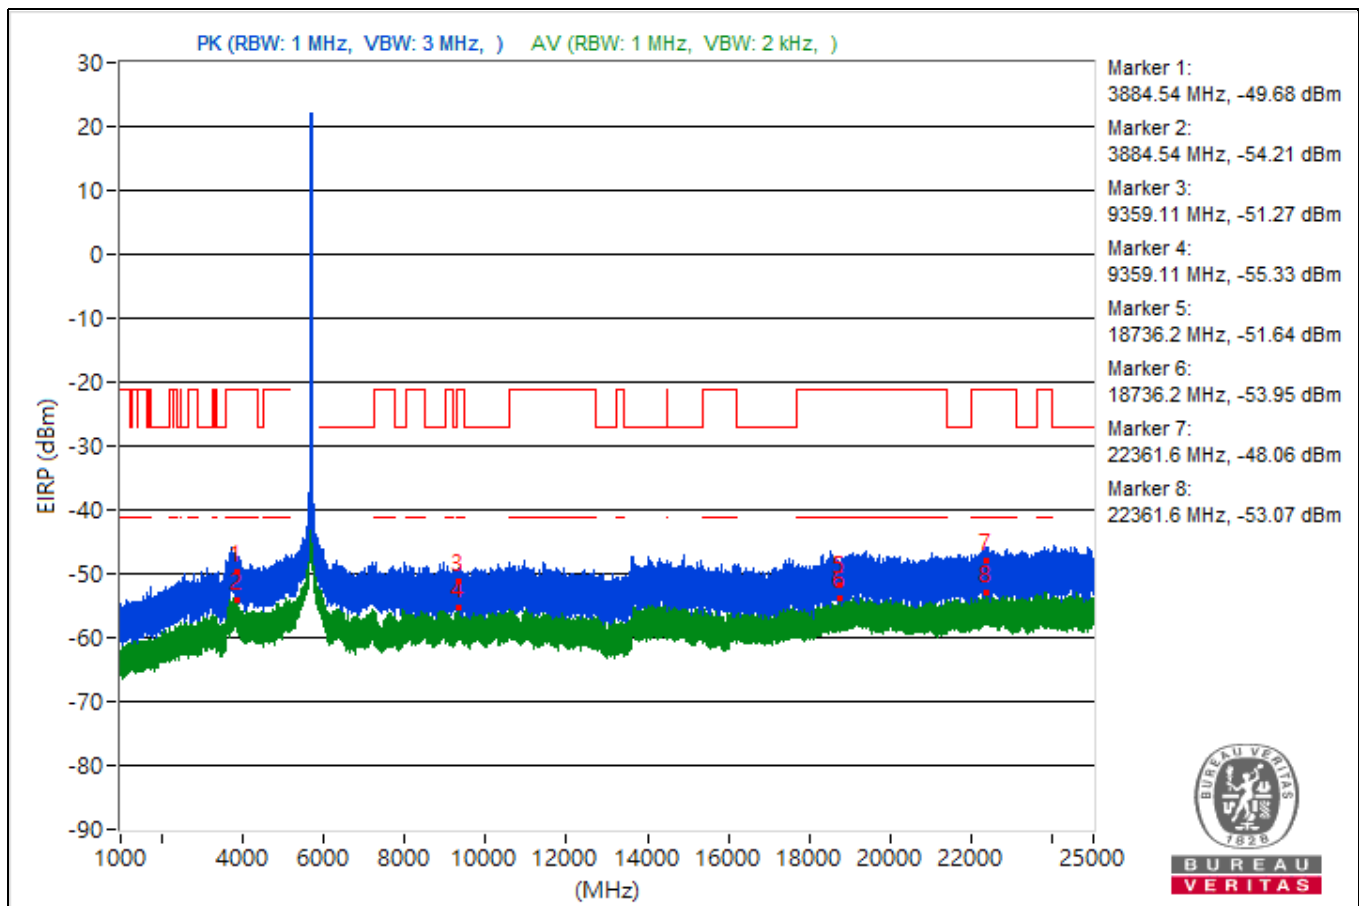


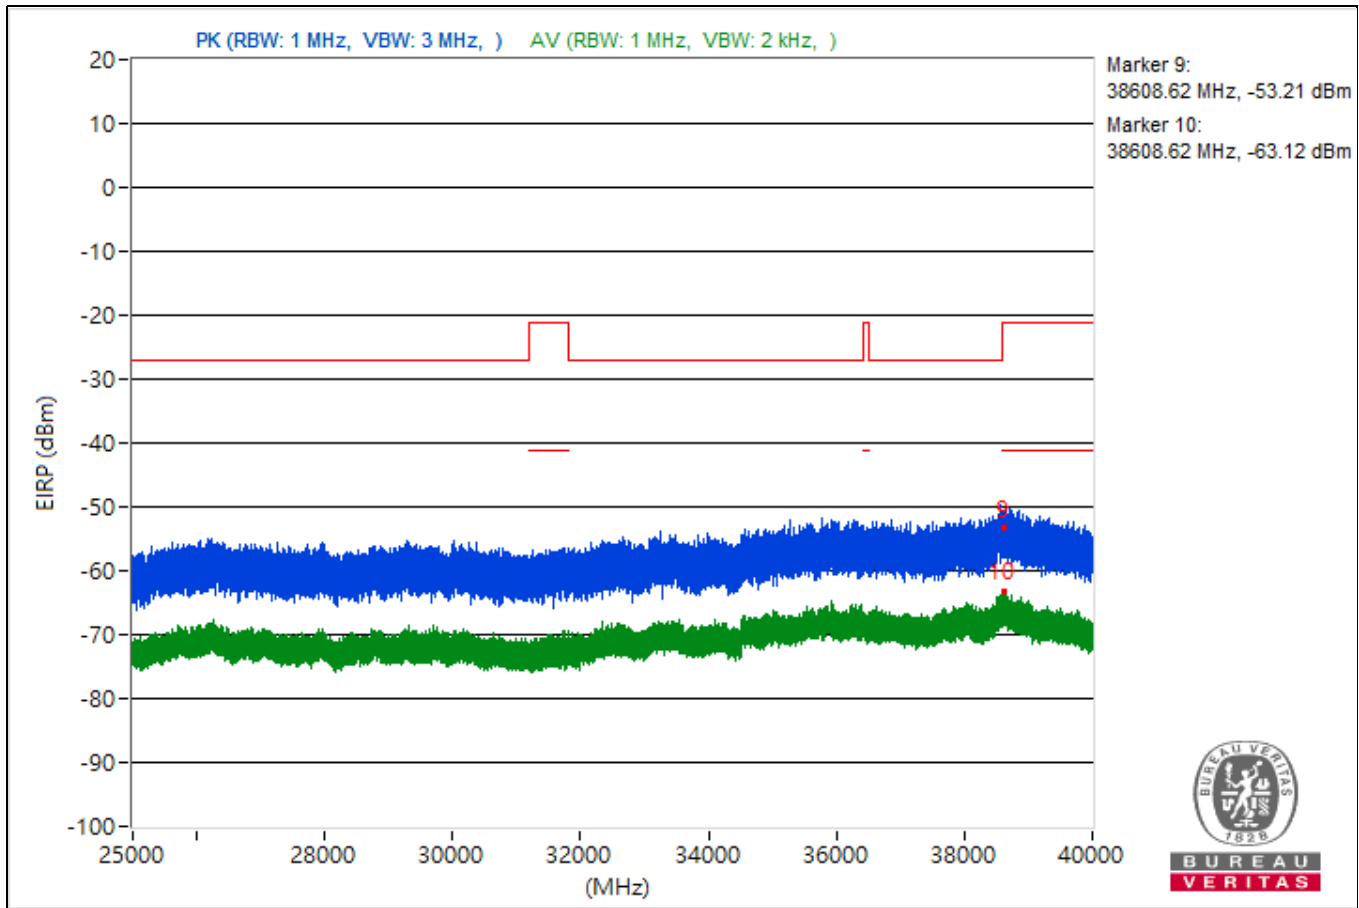


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.71	43.05 PK	74	-30.95	-58.96	-61.76	4.92	-52.21
2	3815.71	41.15 AV	54	-12.85	-65.41	-60.16	4.92	-54.11
3	11470.13	44.33 PK	74	-29.67	-61.87	-57.1	4.92	-50.93
4	11470.13	40.02 AV	54	-13.98	-61.8	-65.2	4.92	-55.24
5	18928.1	45.39 PK	74	-28.61	-57.53	-58.08	4.92	-49.87
6	18928.1	41.64 AV	54	-12.36	-60.25	-63.42	4.92	-53.62
7	22255.7	47.21 PK	74	-26.79	-56.76	-55.31	4.92	-48.05
8	22255.7	42.21 AV	54	-11.79	-64.26	-59.13	4.92	-53.05
9	38689.16	41.7 PK	74	-32.3	-62.79	-60.49	4.92	-53.56
10	38689.16	30.94 AV	54	-23.06	-70.44	-75.44	4.92	-64.32

Note: Margin value = Emission Level - Limit value

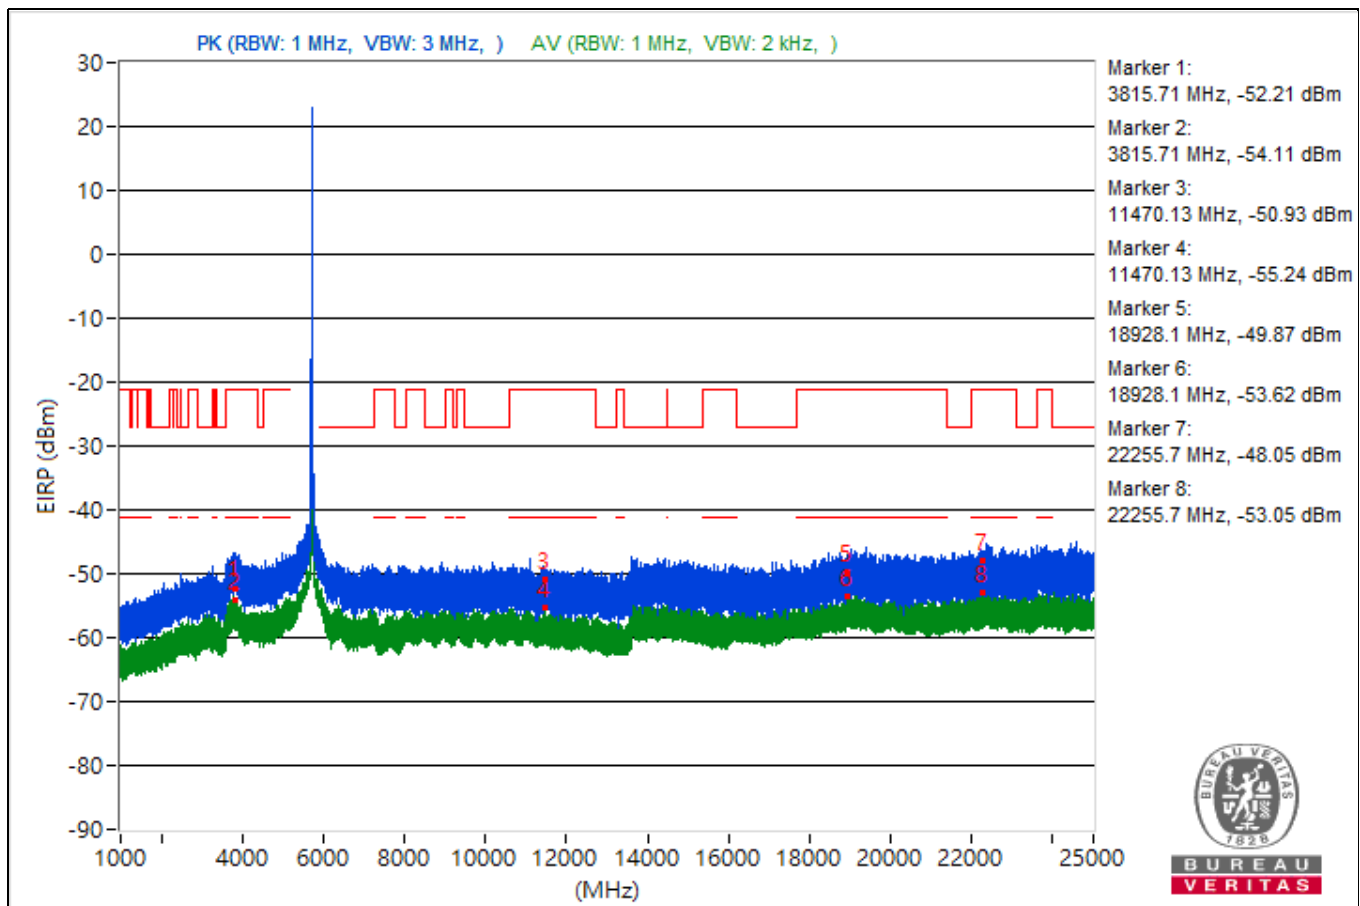


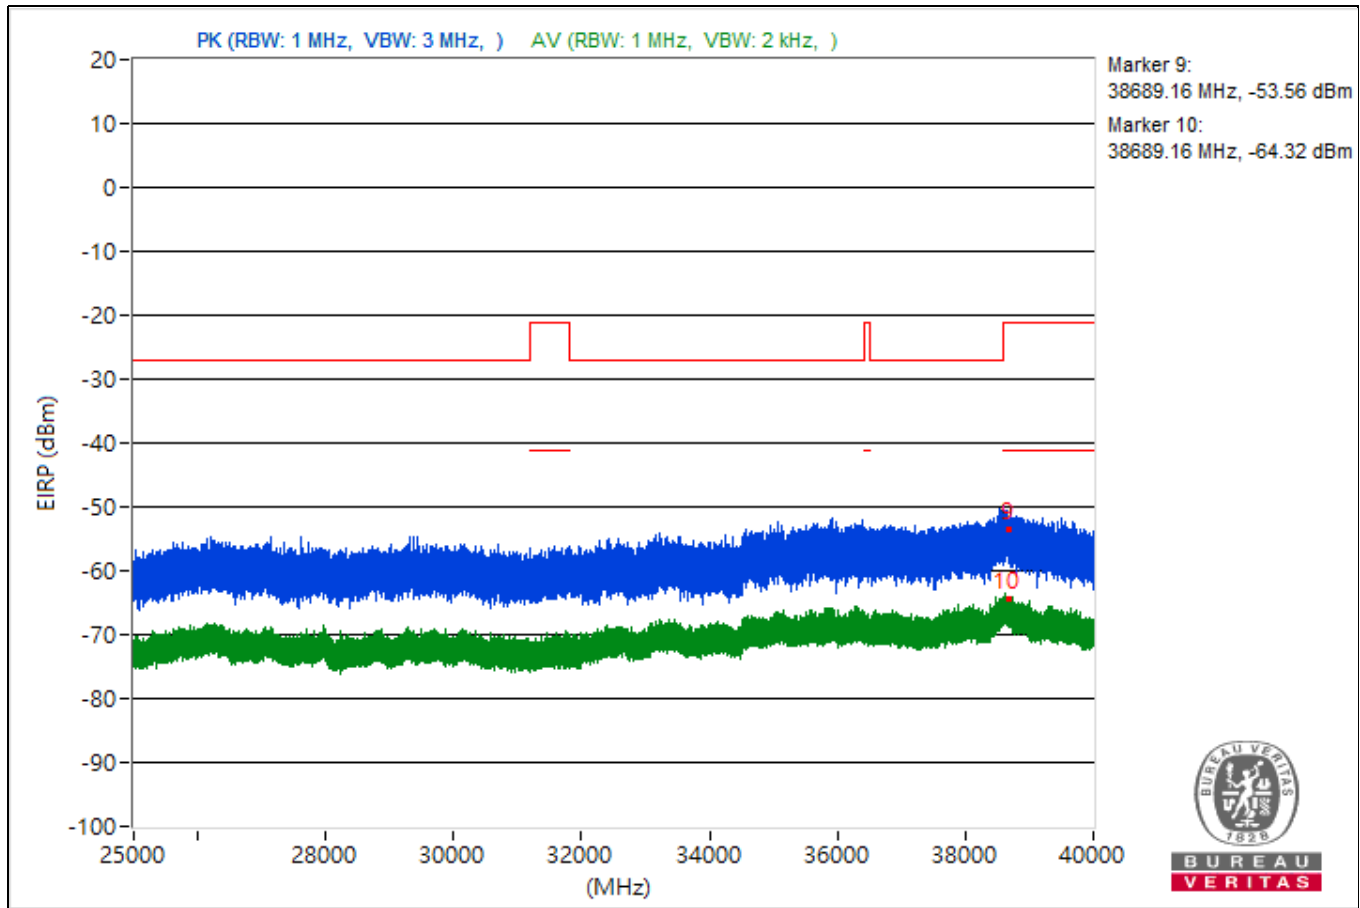


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.48	45.27 PK	74	-28.73	-57.36	-58.57	4.92	-49.99
2	5096.48	41.57 AV	54	-12.43	-60.93	-62.45	4.92	-53.69
3	11481.07	47.07 PK	74	-26.93	-58.35	-54.66	4.92	-48.19
4	11481.07	40.96 AV	54	-13.04	-67.22	-59.97	4.92	-54.3
5	18918.4	46.02 PK	74	-27.98	-58.2	-56.34	4.92	-49.24
6	18918.4	41.67 AV	54	-12.33	-60.7	-62.53	4.92	-53.59
7	23615.6	45.44 PK	74	-28.56	-59.21	-56.66	4.92	-49.82
8	23615.6	43.11 AV	54	-10.89	-62.47	-58.55	4.92	-52.15
9	38623.56	41.74 PK	74	-32.26	-63.51	-60.05	4.92	-53.52
10	38623.56	31.48 AV	54	-22.52	-74.13	-70.16	4.92	-63.78

Note: Margin value = Emission Level - Limit value

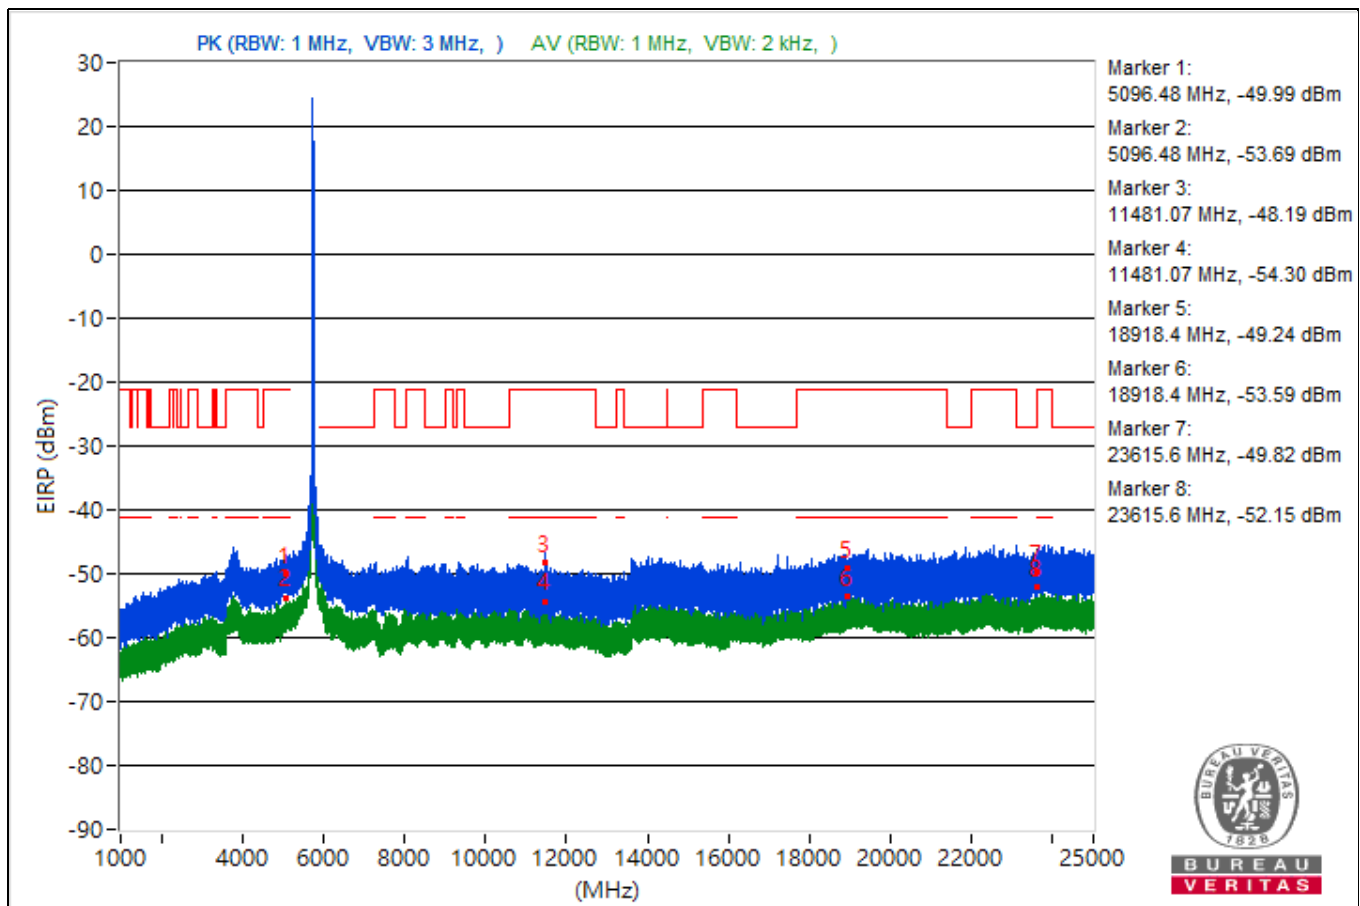


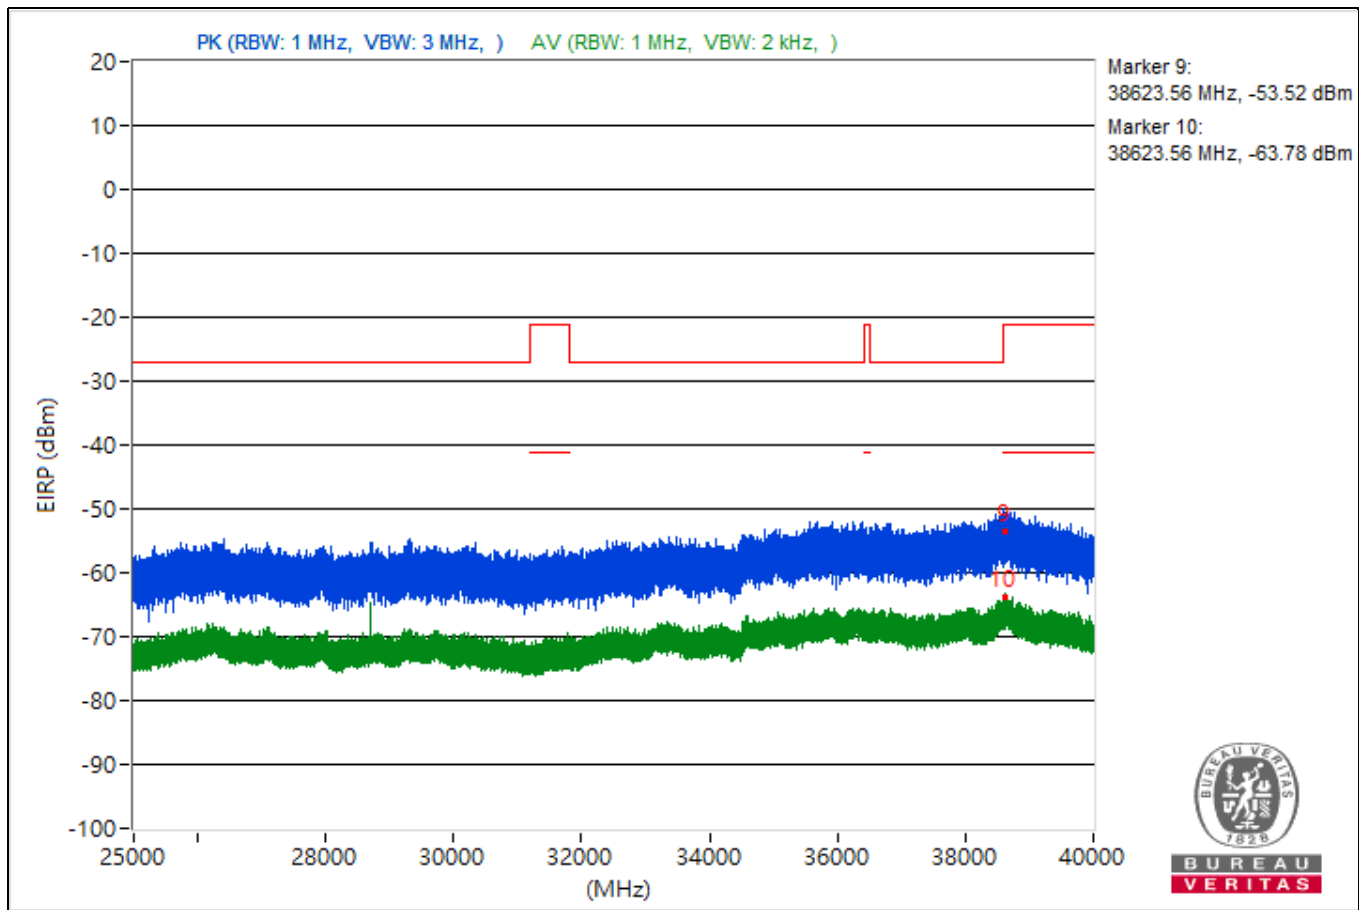


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.81	45.14 PK	74	-28.86	-59.68	-56.88	4.92	-50.12
2	3775.81	41.16 AV	54	-12.84	-61.03	-63.35	4.92	-54.1
3	8152.8	42.86 PK	74	-31.14	-58.44	-63.77	4.92	-52.4
4	8152.8	40.04 AV	54	-13.96	-61.52	-65.79	4.92	-55.22
5	18673.2	44.53 PK	74	-29.47	-59.71	-57.82	4.92	-50.73
6	18673.2	41.2 AV	54	-12.8	-60.8	-63.64	4.92	-54.06
7	22412.5	43.72 PK	74	-30.28	-58.93	-60.08	4.92	-51.54
8	22412.5	42.27 AV	54	-11.73	-59.56	-62.91	4.92	-52.99
9	38651.02	42.34 PK	74	-31.66	-59.6	-62.63	4.92	-52.92
10	38651.02	32.18 AV	54	-21.82	-70.43	-71.7	4.92	-63.08

Note: Margin value = Emission Level - Limit value

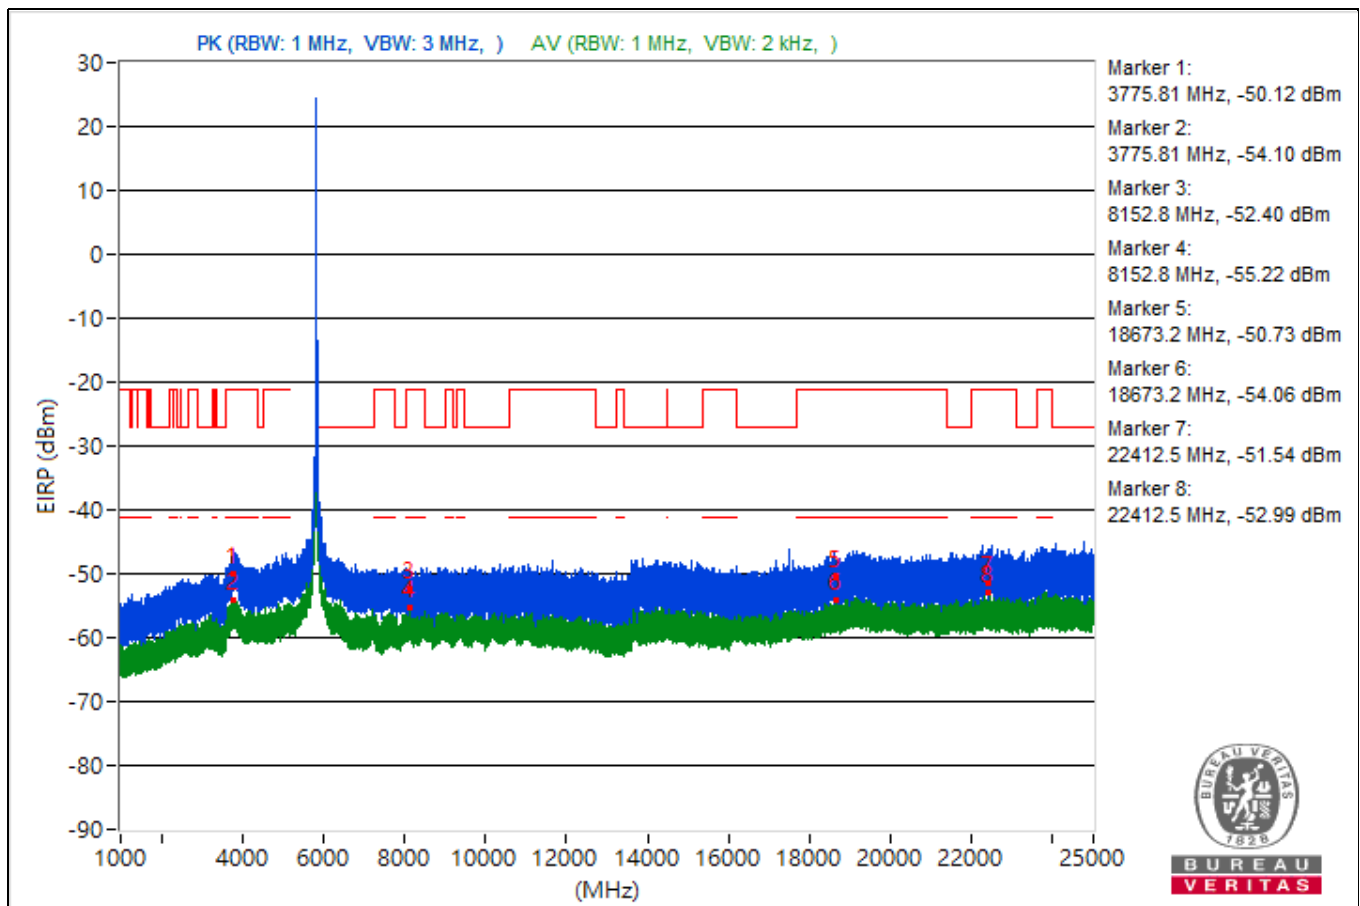


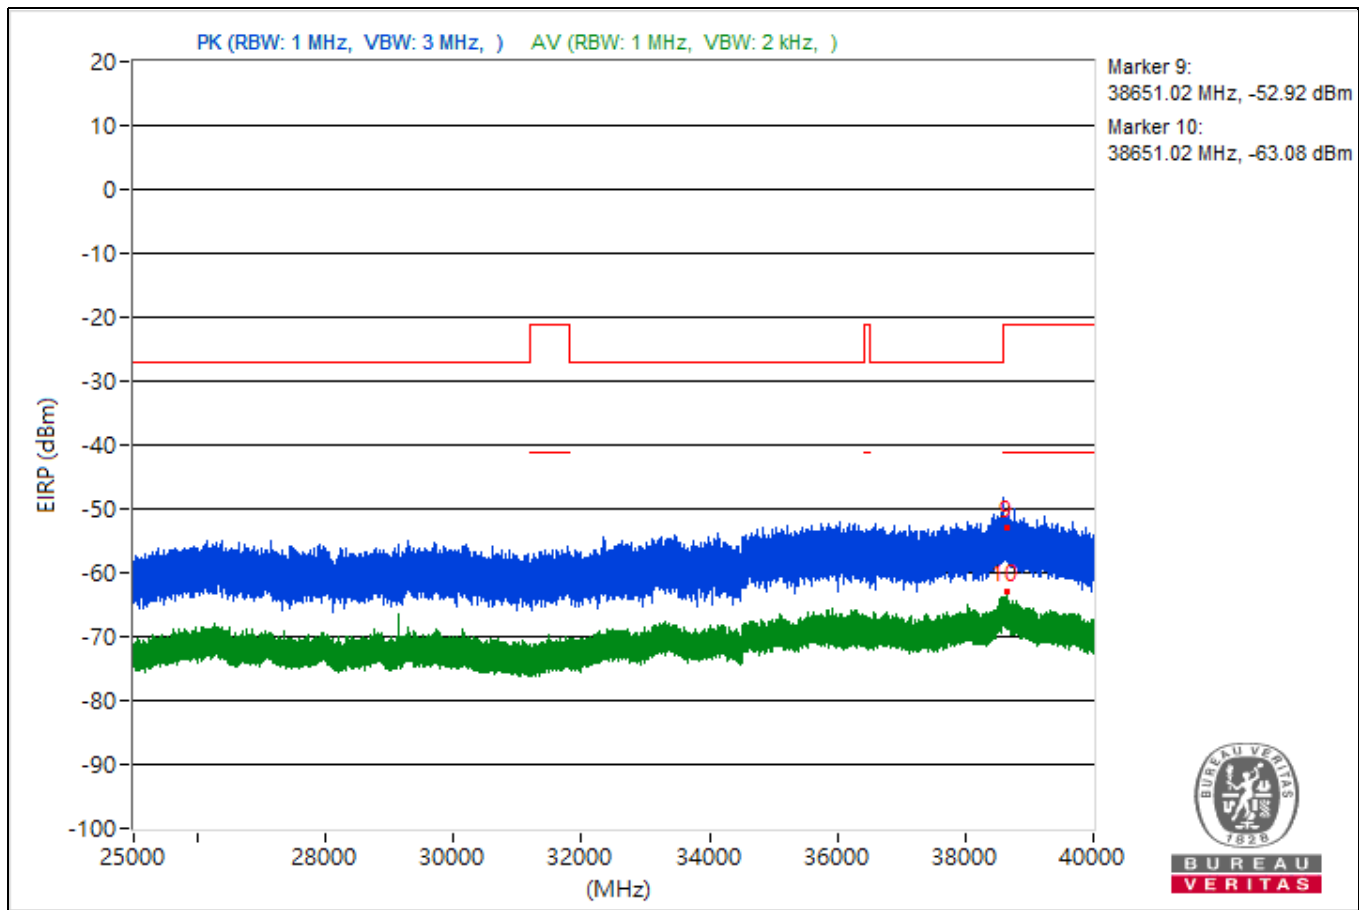


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5098.5	49.87 PK	74	-24.13	-53.48	-53.16	4.92	-45.39
2	5098.5	44.87 AV	54	-9.13	-58.96	-57.77	4.92	-50.39
3	8448.18	41.32 PK	74	-32.68	-61.35	-62.46	4.92	-53.94
4	8448.18	40.52 AV	54	-13.48	-62.06	-63.38	4.92	-54.74
5	18917.6	46.03 PK	74	-27.97	-55.48	-59.94	4.92	-49.23
6	18917.6	41.29 AV	54	-12.71	-63.41	-60.78	4.92	-53.97
7	22754.7	45.13 PK	74	-28.87	-57.77	-58.37	4.92	-50.13
8	22754.7	42.22 AV	54	-11.78	-60.48	-61.52	4.92	-53.04
9	38645.07	40.89 PK	74	-33.11	-61.2	-63.79	4.92	-54.37
10	38645.07	31.21 AV	54	-22.79	-74.63	-70.34	4.92	-64.05

Note: Margin value = Emission Level - Limit value

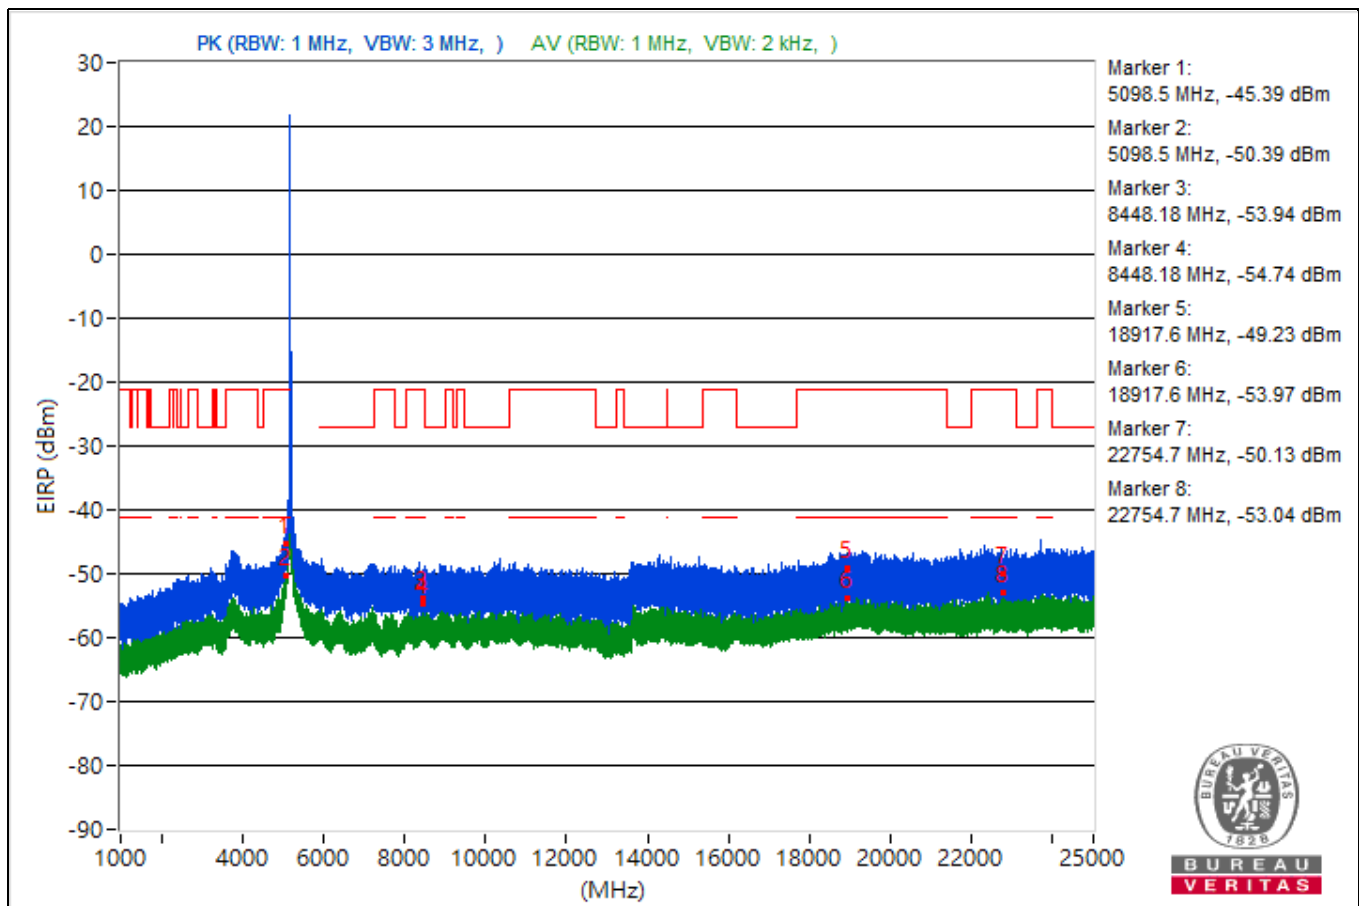


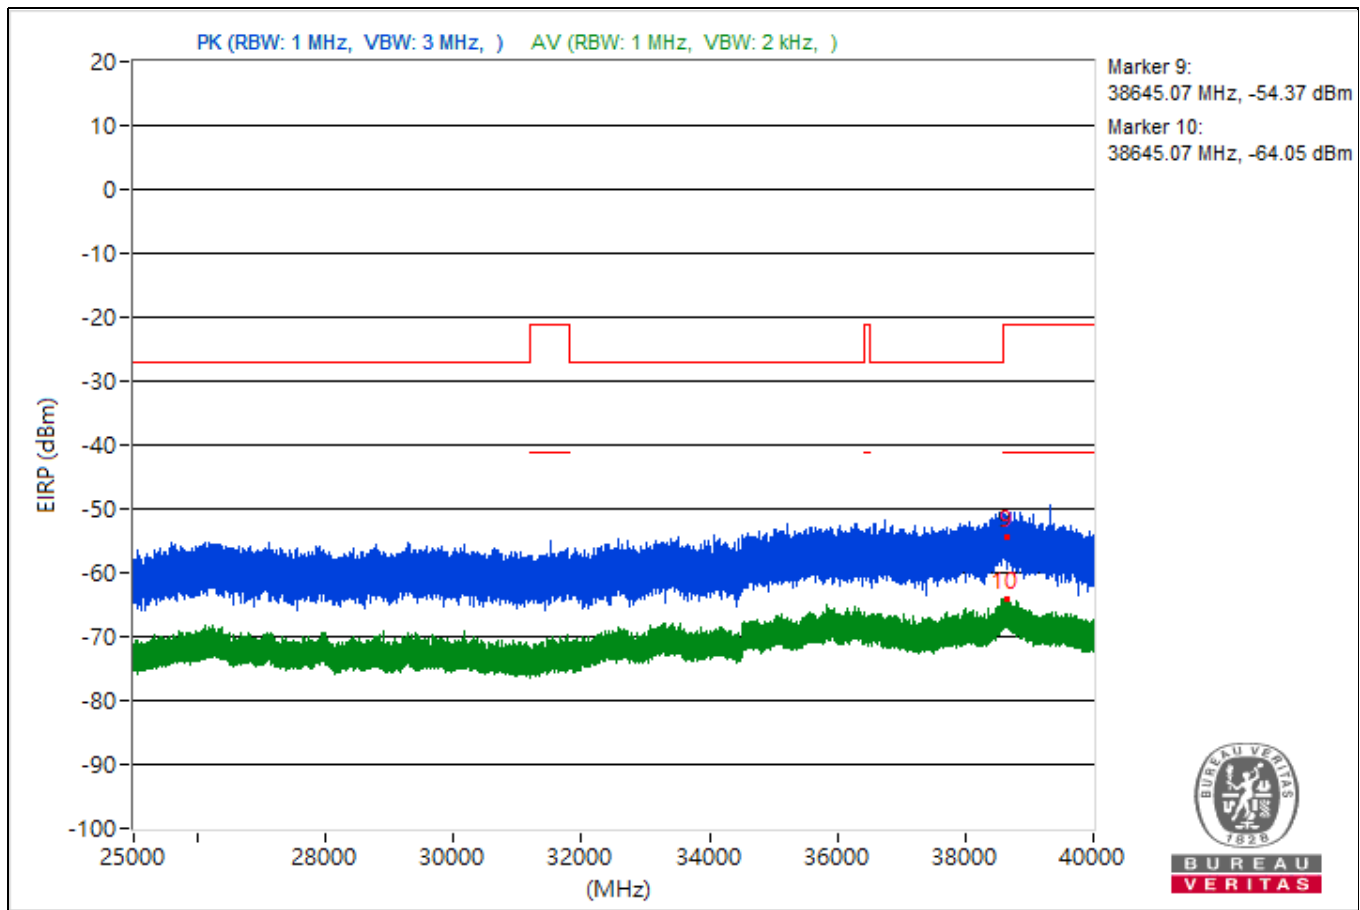


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5080.14	49.03 PK	74	-24.97	-54.6	-53.76	4.92	-46.23
2	5080.14	43.79 AV	54	-10.21	-58.46	-60.59	4.92	-51.47
3	9035.82	43.16 PK	74	-30.84	-62.37	-58.51	4.92	-52.1
4	9035.82	39.92 AV	54	-14.08	-61.83	-65.44	4.92	-55.34
5	18973.4	45.4 PK	74	-28.6	-59.35	-56.65	4.92	-49.86
6	18973.4	41.91 AV	54	-12.09	-61.85	-60.78	4.92	-53.35
7	23723.4	46.48 PK	74	-27.52	-56.46	-56.98	4.92	-48.78
8	23723.4	42.14 AV	54	-11.86	-63.31	-59.58	4.92	-53.12
9	38618.4	42.3 PK	74	-31.7	-61.33	-60.48	4.92	-52.96
10	38618.4	31.97 AV	54	-22.03	-70.38	-72.26	4.92	-63.29

Note: Margin value = Emission Level - Limit value

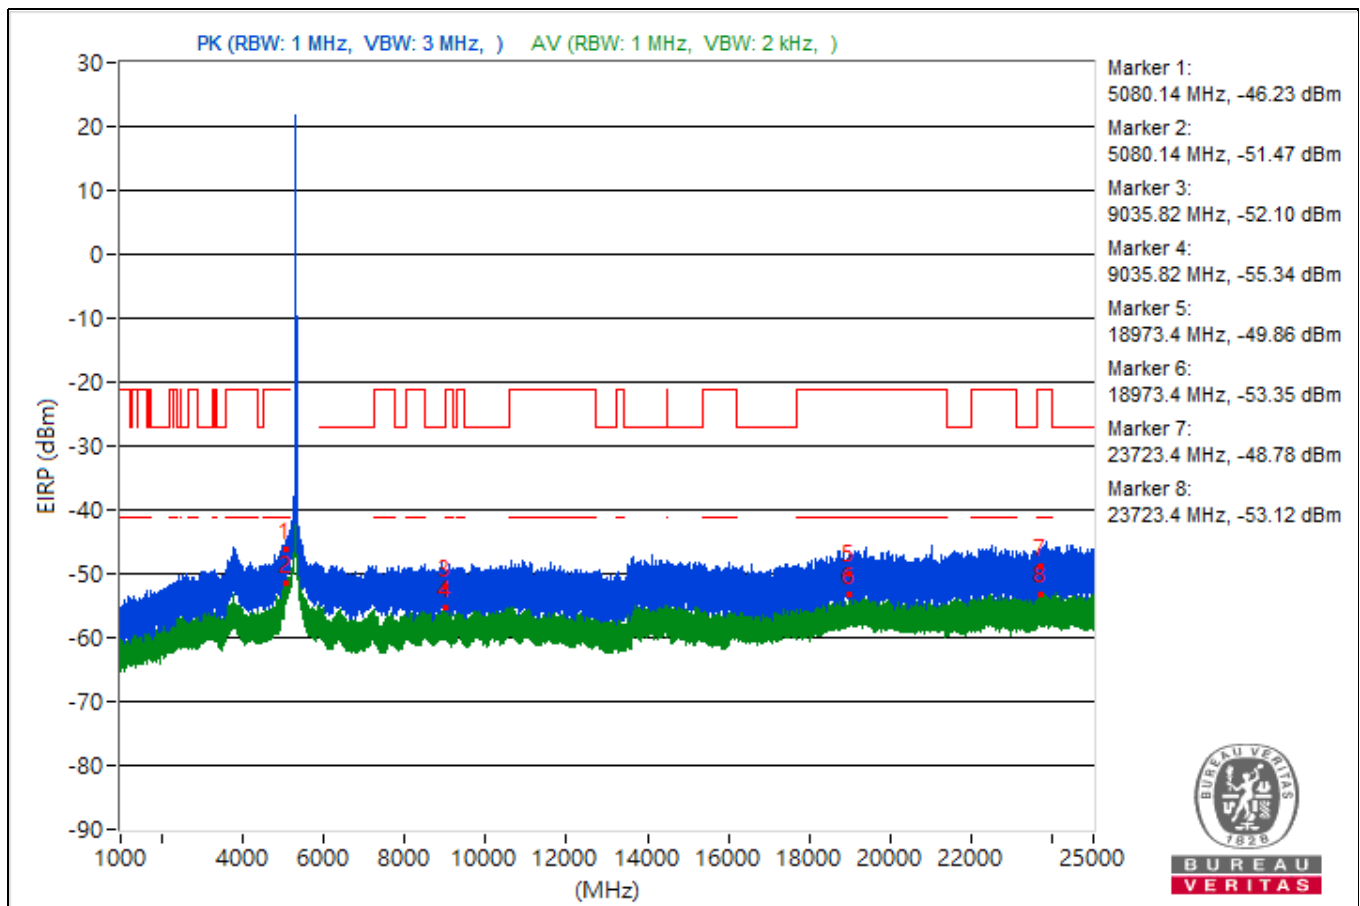


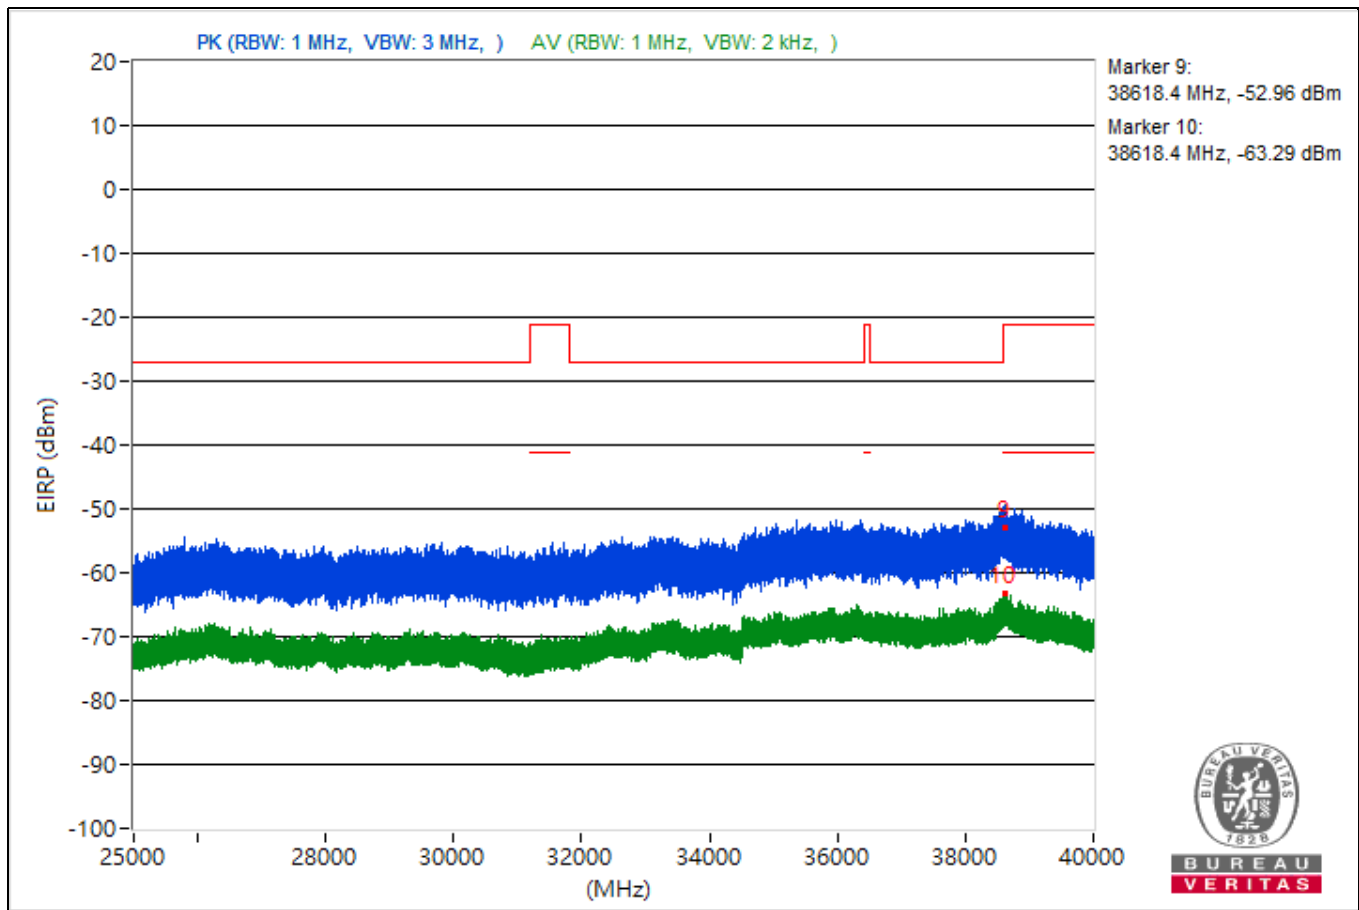


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.71	45.72 PK	74	-28.28	-56.66	-58.46	4.92	-49.54
2	5096.71	41.24 AV	54	-12.76	-64.5	-60.35	4.92	-54.02
3	10819.29	43.65 PK	74	-30.35	-58.71	-60.57	4.92	-51.61
4	10819.29	39.68 AV	54	-14.32	-66.51	-61.75	4.92	-55.58
5	18611.6	43.79 PK	74	-30.21	-59.05	-59.77	4.92	-51.47
6	18611.6	41.51 AV	54	-12.49	-62.37	-61.09	4.92	-53.75
7	23991.6	46.16 PK	74	-27.84	-56.08	-58.23	4.92	-49.1
8	23991.6	42.46 AV	54	-11.54	-61.79	-59.88	4.92	-52.8
9	38646.22	41.18 PK	74	-32.82	-64.25	-60.54	4.92	-54.08
10	38646.22	31.54 AV	54	-22.46	-72.58	-70.88	4.92	-63.72

Note: Margin value = Emission Level - Limit value

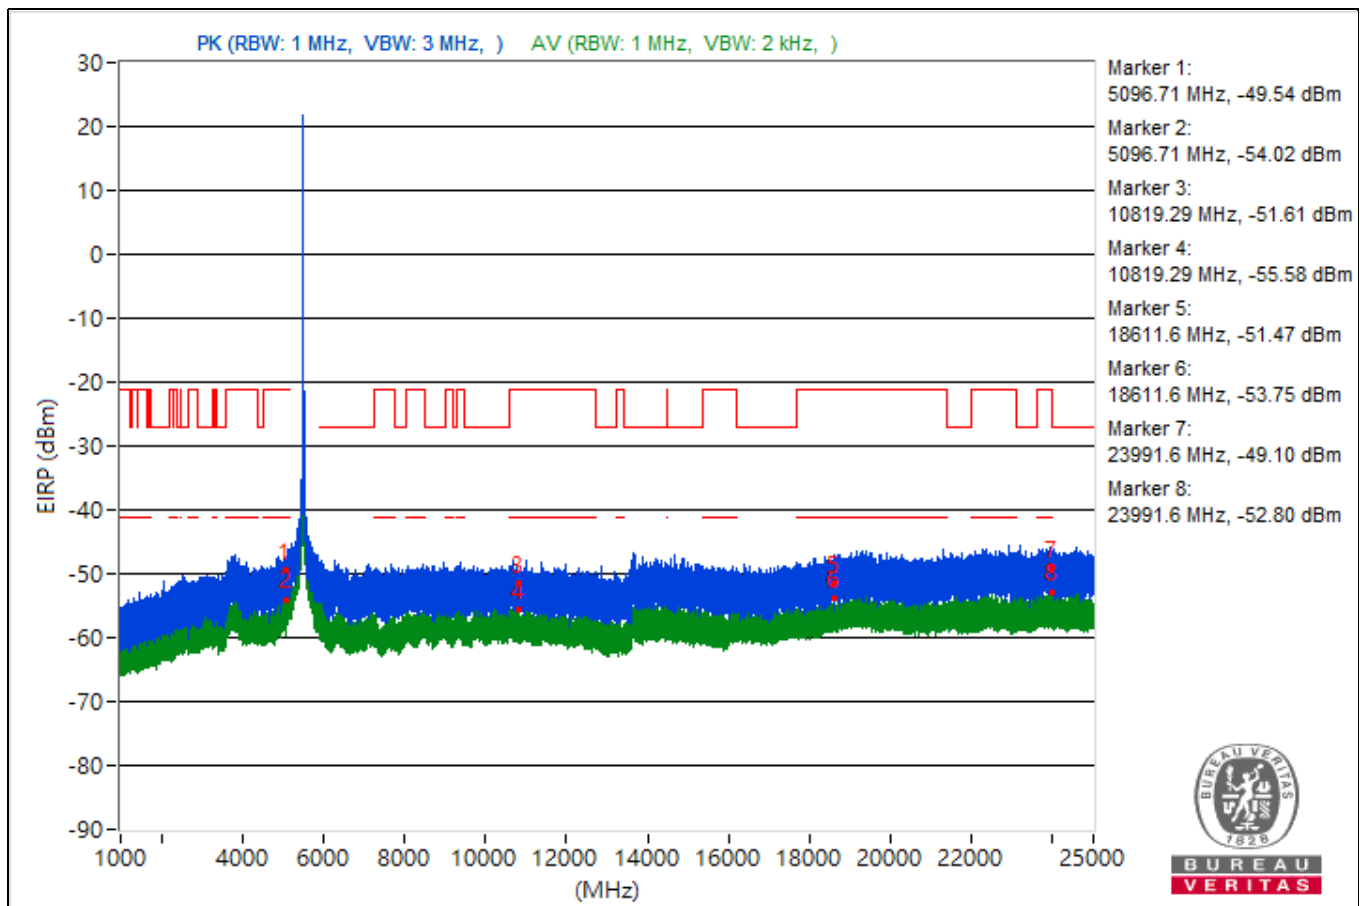


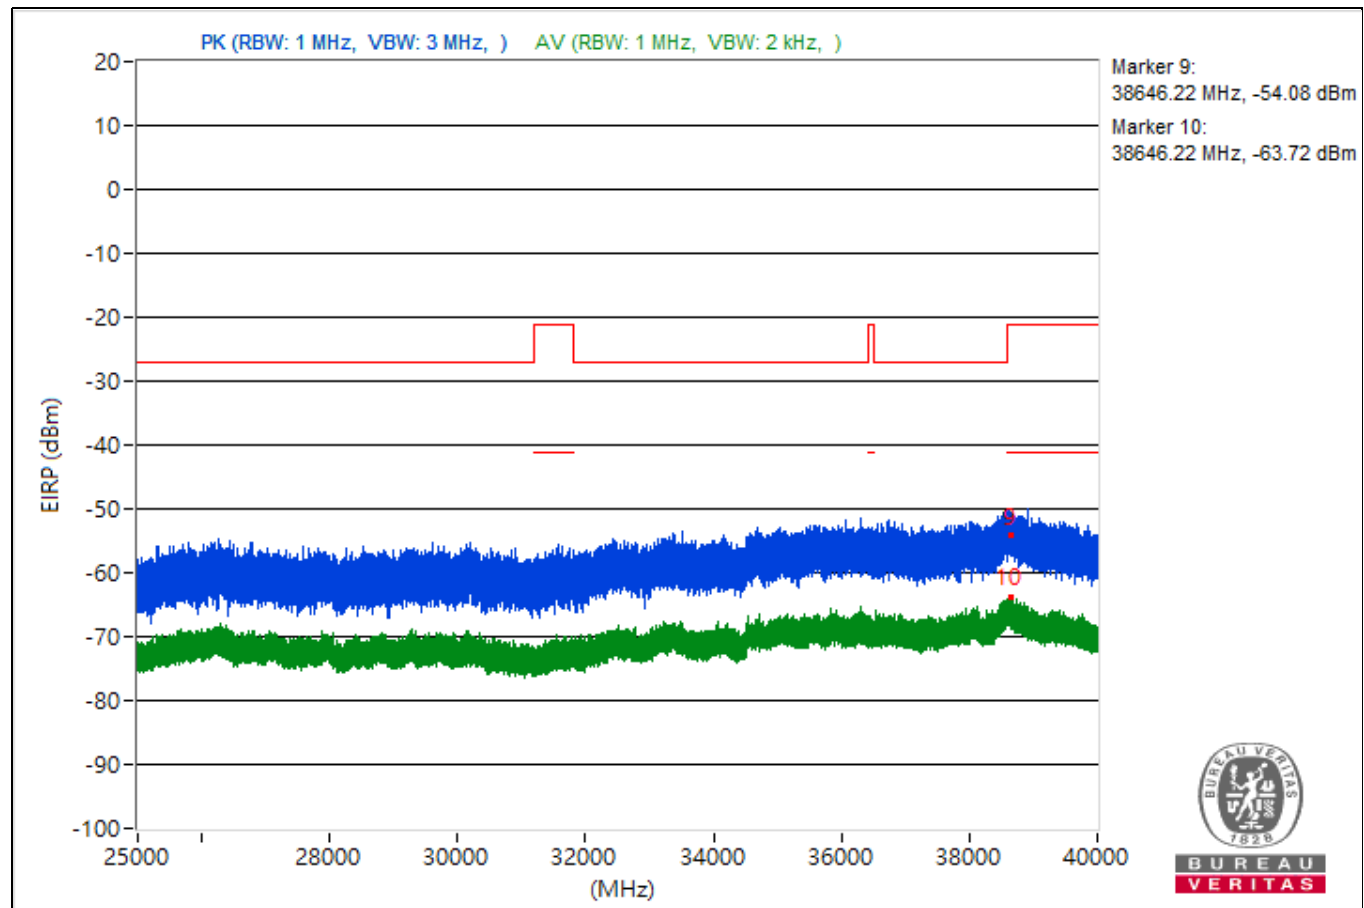


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3824.97	47.63 PK	74	-26.37	-54.62	-56.75	4.92	-47.63
2	3824.97	41.35 AV	54	-12.65	-60.01	-65.07	4.92	-53.91
3	10609.24	44.34 PK	74	-29.66	-58.11	-59.74	4.92	-50.92
4	10609.24	39.64 AV	54	-14.36	-66.03	-61.98	4.92	-55.62
5	18976.4	45.12 PK	74	-28.88	-56.96	-59.56	4.92	-50.14
6	18976.4	42.37 AV	54	-11.63	-59.74	-62.27	4.92	-52.89
7	22767.4	42.97 PK	74	-31.03	-60.57	-59.9	4.92	-52.29
8	22767.4	42.29 AV	54	-11.71	-63.23	-59.4	4.92	-52.97
9	38682.58	41.23 PK	74	-32.77	-62.52	-61.46	4.92	-54.03
10	38682.58	31.75 AV	54	-22.25	-73.47	-70.06	4.92	-63.51

Note: Margin value = Emission Level - Limit value

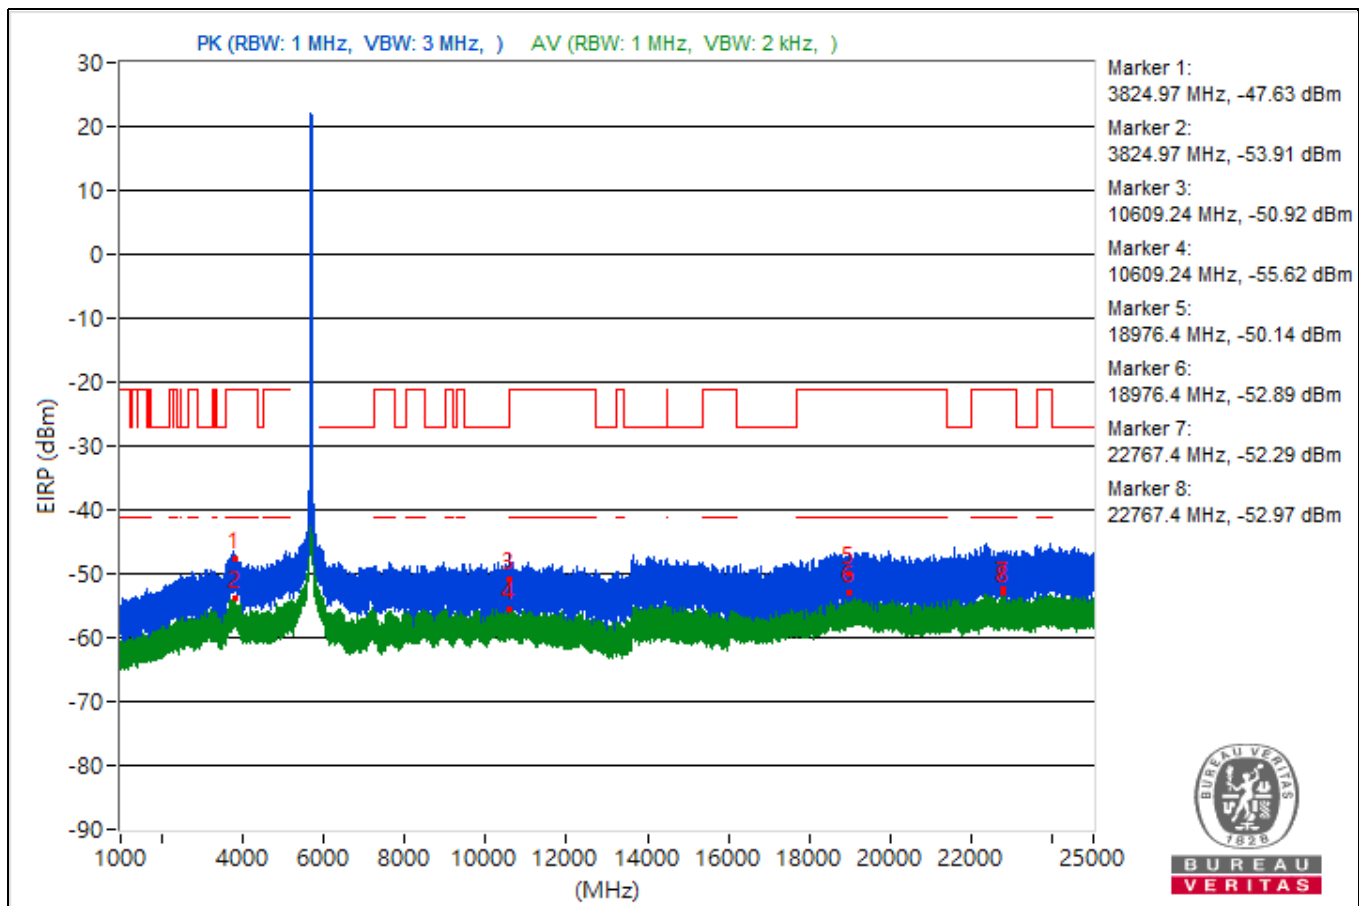


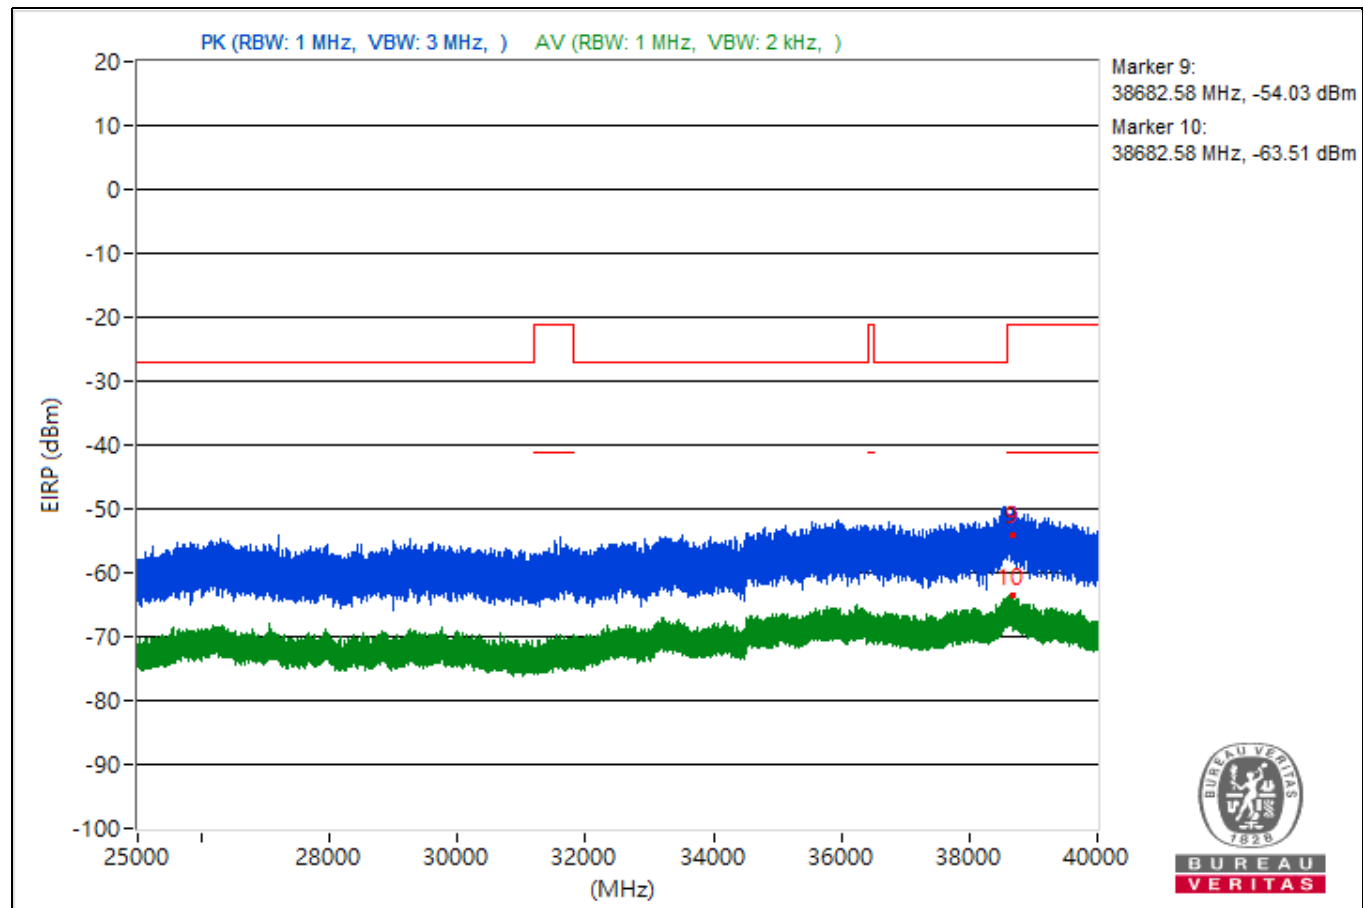


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.18	44.06 PK	74	-29.94	-57.88	-60.89	4.92	-51.2
2	3795.18	41.2 AV	54	-12.8	-61.3	-62.82	4.92	-54.06
3	11064	43.31 PK	74	-30.69	-60.19	-59.59	4.92	-51.95
4	11064	39.23 AV	54	-14.77	-62.48	-66.21	4.92	-56.03
5	18942.8	44.12 PK	74	-29.88	-59.32	-58.84	4.92	-51.14
6	18942.8	40.48 AV	54	-13.52	-64.09	-61.67	4.92	-54.78
7	23674.5	44.82 PK	74	-29.18	-57.69	-59.19	4.92	-50.44
8	23674.5	41.06 AV	54	-12.94	-63.9	-60.88	4.92	-54.2
9	38605.42	41.2 PK	74	-32.8	-60.85	-63.53	4.92	-54.06
10	38605.42	30.56 AV	54	-23.44	-75.17	-71.05	4.92	-64.7

Note: Margin value = Emission Level - Limit value

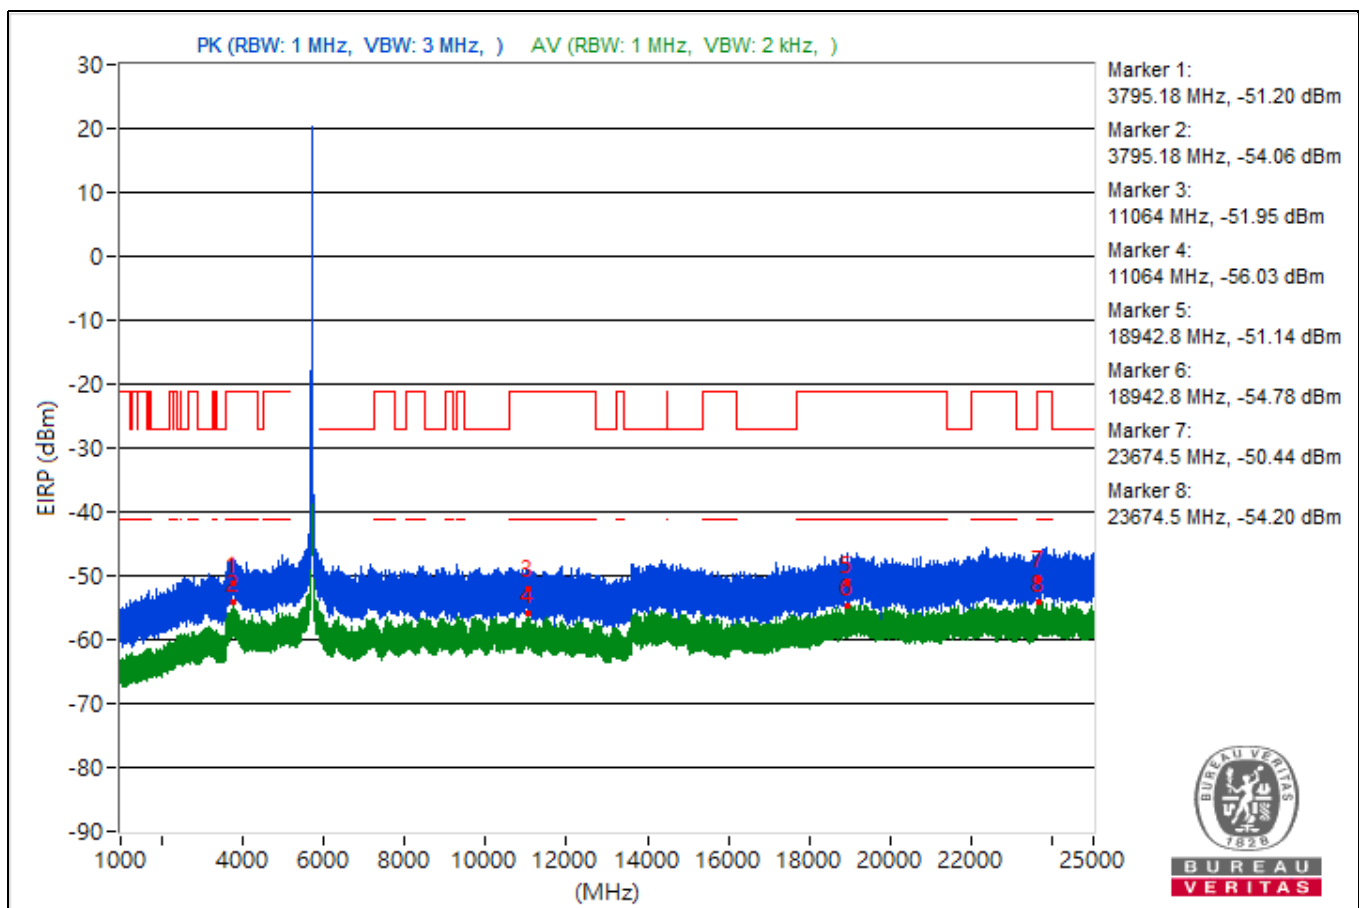


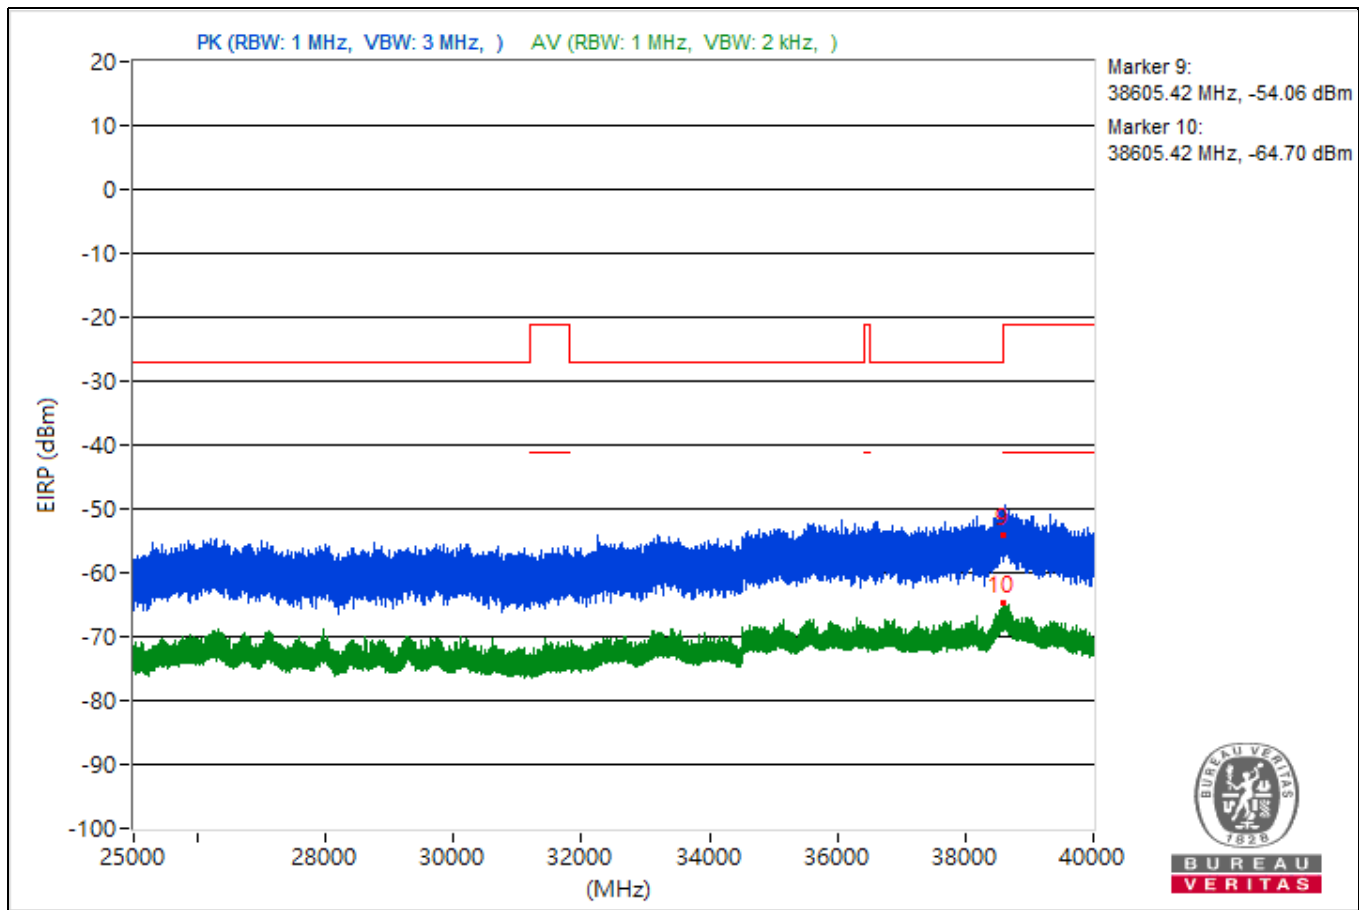


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.18	45.59 PK	74	-28.41	-56.96	-58.35	4.92	-49.67
2	5097.18	42.26 AV	54	-11.74	-60.84	-61.02	4.92	-53
3	11481.6	44.57 PK	74	-29.43	-56.43	-63.26	4.92	-50.69
4	11481.6	40.6 AV	54	-13.4	-63.37	-61.93	4.92	-54.66
5	18949.5	44.42 PK	74	-29.58	-58.4	-59.19	4.92	-50.84
6	18949.5	41.43 AV	54	-12.57	-60.45	-63.66	4.92	-53.83
7	23919.8	45.54 PK	74	-28.46	-57	-58.41	4.92	-49.72
8	23919.8	41.92 AV	54	-12.08	-59.76	-63.59	4.92	-53.34
9	38652.44	40.12 PK	74	-33.88	-62.96	-63.18	4.92	-55.14
10	38652.44	31.7 AV	54	-22.3	-70.4	-72.94	4.92	-63.56

Note: Margin value = Emission Level - Limit value

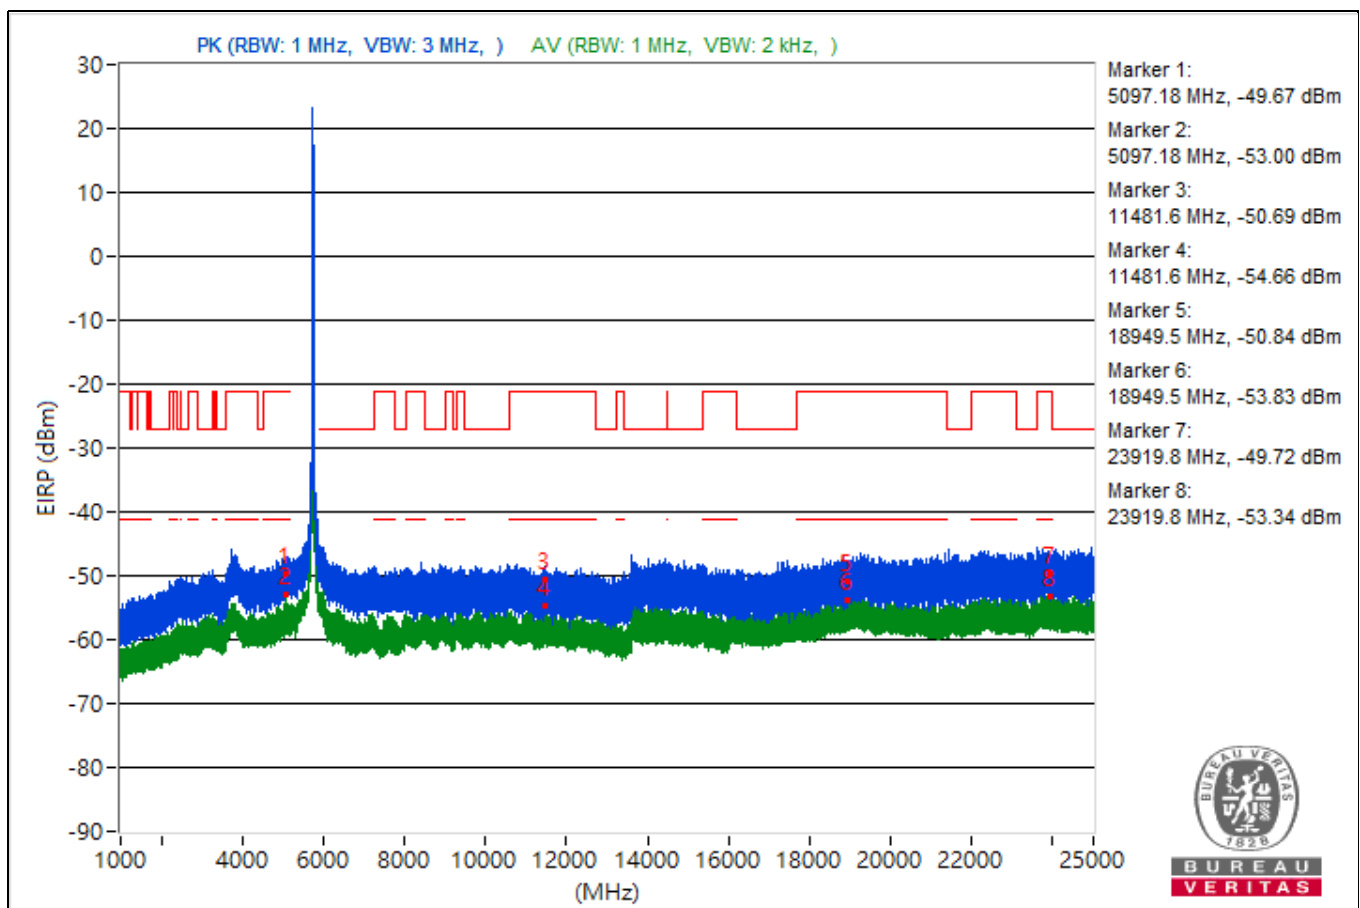


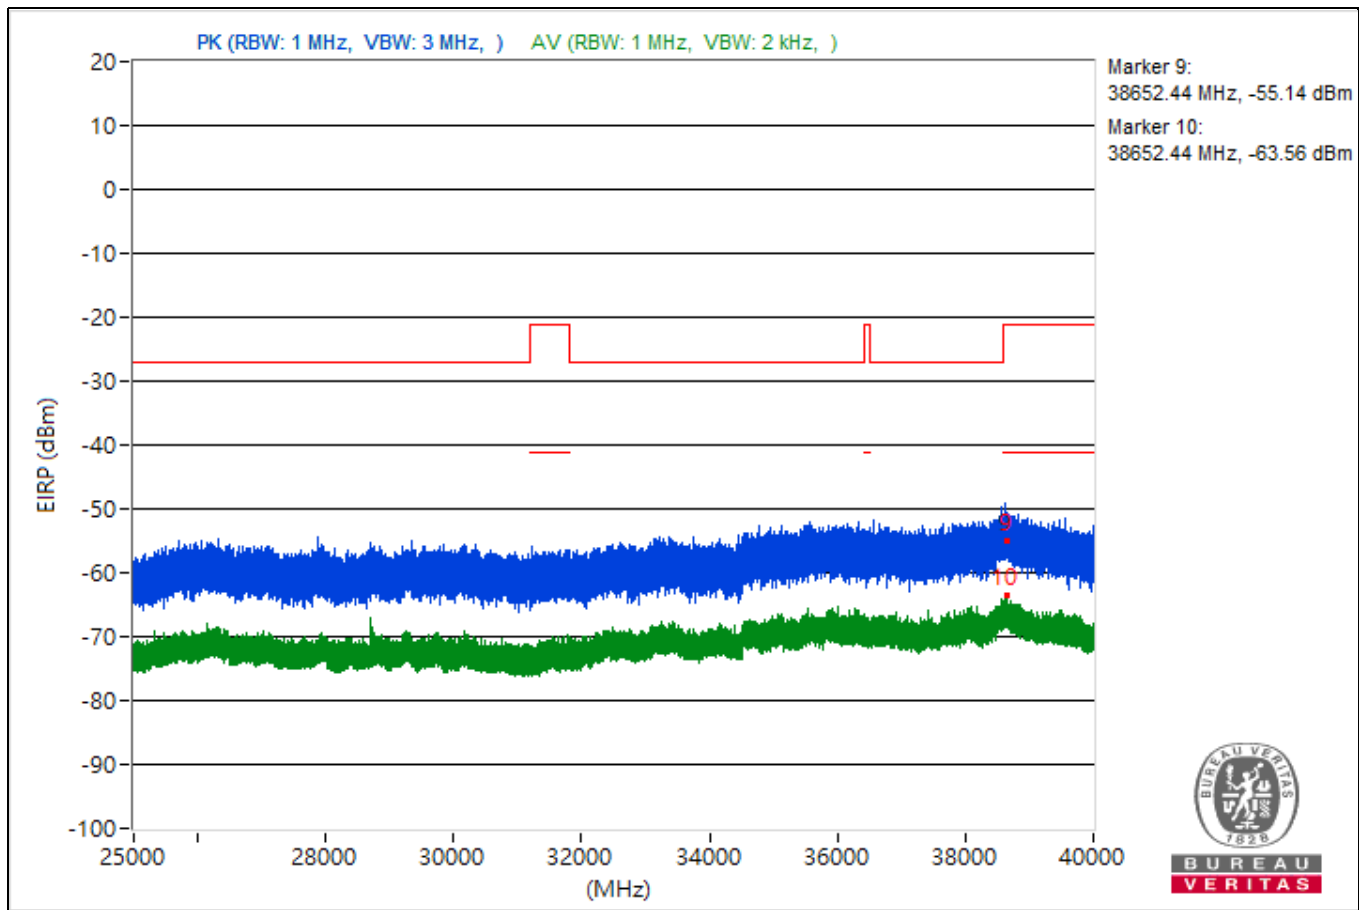


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.89	45.74 PK	74	-28.26	-57.61	-57.3	4.92	-49.52
2	3768.89	40.58 AV	54	-13.42	-60.73	-65.98	4.92	-54.68
3	10679.11	43.34 PK	74	-30.66	-60.21	-59.51	4.92	-51.92
4	10679.11	39.38 AV	54	-14.62	-66.43	-62.19	4.92	-55.88
5	18893.5	47.31 PK	74	-26.69	-57.13	-54.91	4.92	-47.95
6	18893.5	40.52 AV	54	-13.48	-65.8	-60.87	4.92	-54.74
7	22405	45.21 PK	74	-28.79	-56.28	-60.8	4.92	-50.05
8	22405	41.63 AV	54	-12.37	-59.67	-64.97	4.92	-53.63
9	38658.58	42.35 PK	74	-31.65	-58.96	-64.23	4.92	-52.91
10	38658.58	30.68 AV	54	-23.32	-70.56	-76.15	4.92	-64.58

Note: Margin value = Emission Level - Limit value

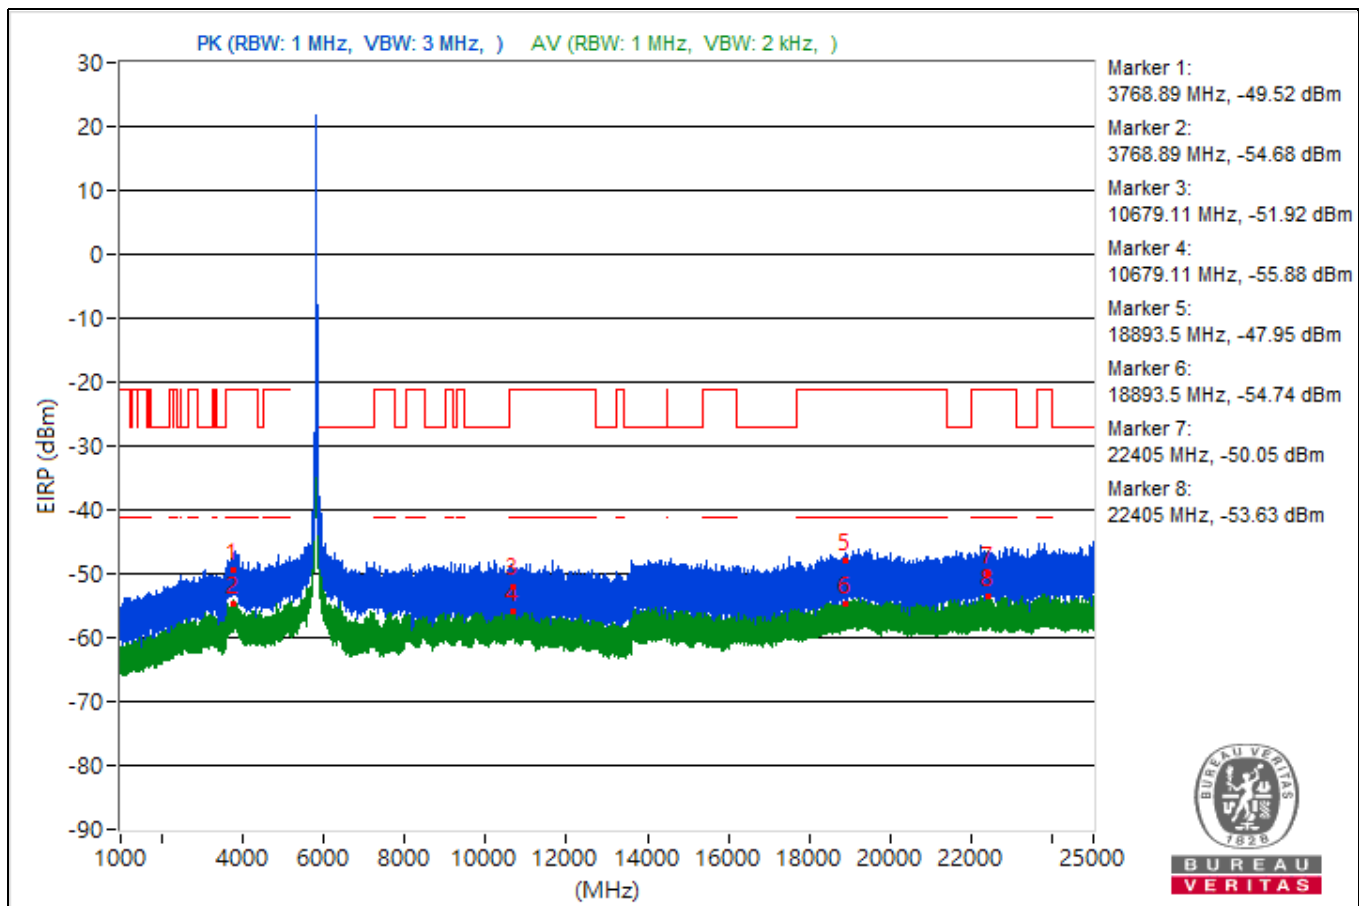


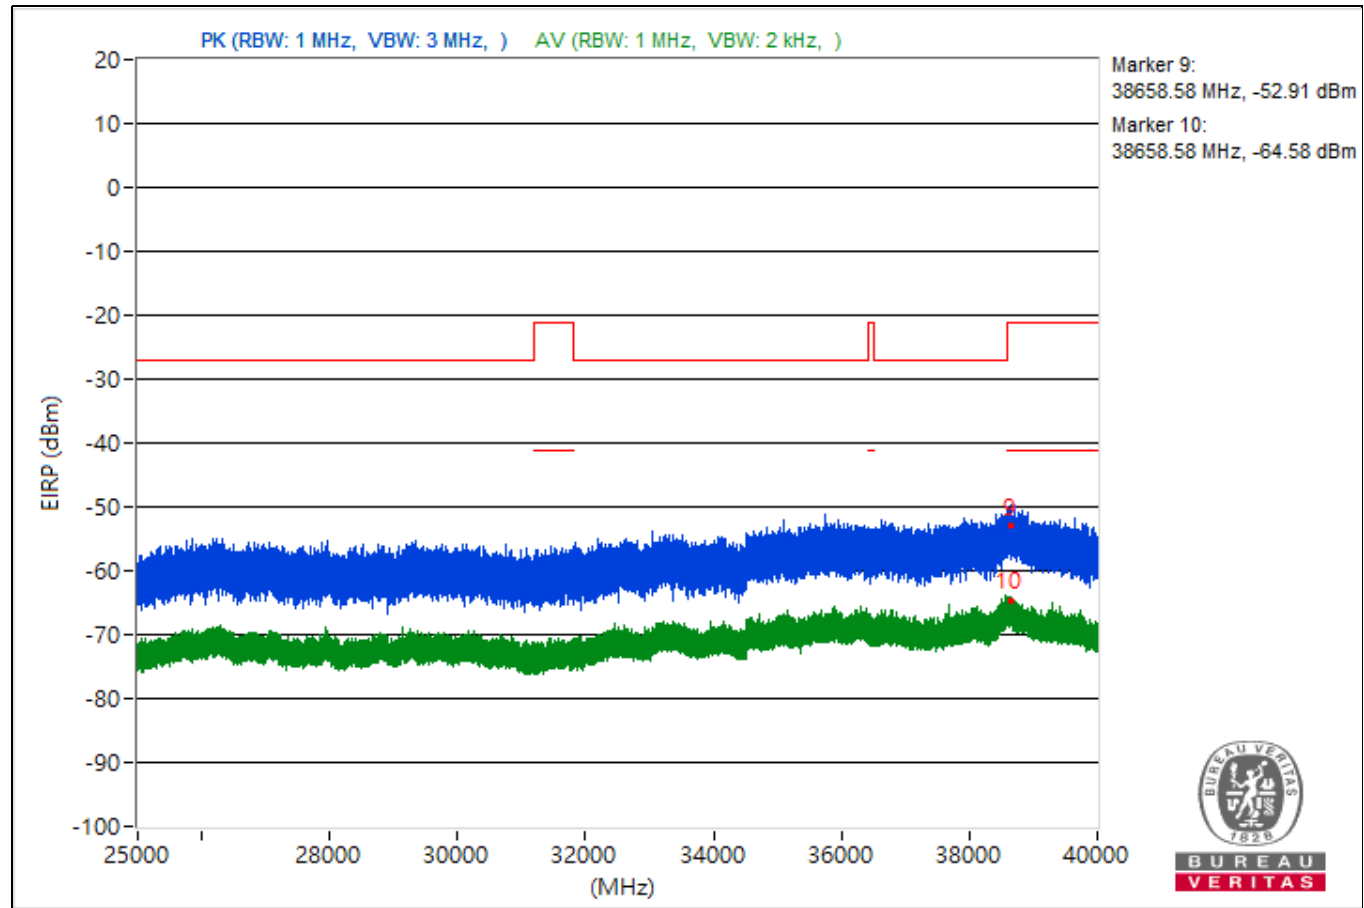


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.9	54.31 PK	74	-19.69	-48.28	-49.57	4.92	-40.95
2	5099.9	48.1 AV	54	-5.9	-54.66	-55.57	4.92	-47.16
3	8473.87	43.45 PK	74	-30.55	-58.91	-60.77	4.92	-51.81
4	8473.87	38.48 AV	54	-15.52	-66.62	-63.39	4.92	-56.78
5	18981.5	44.03 PK	74	-29.97	-58.18	-60.42	4.92	-51.23
6	18981.5	40.43 AV	54	-13.57	-64.25	-61.64	4.92	-54.83
7	22312.6	43.93 PK	74	-30.07	-59.47	-59.06	4.92	-51.33
8	22312.6	40.91 AV	54	-13.09	-60.87	-64.4	4.92	-54.35
9	38627.38	40.43 PK	74	-33.57	-61.97	-63.73	4.92	-54.83
10	38627.38	30.5 AV	54	-23.5	-71.3	-74.75	4.92	-64.76

Note: Margin value = Emission Level - Limit value

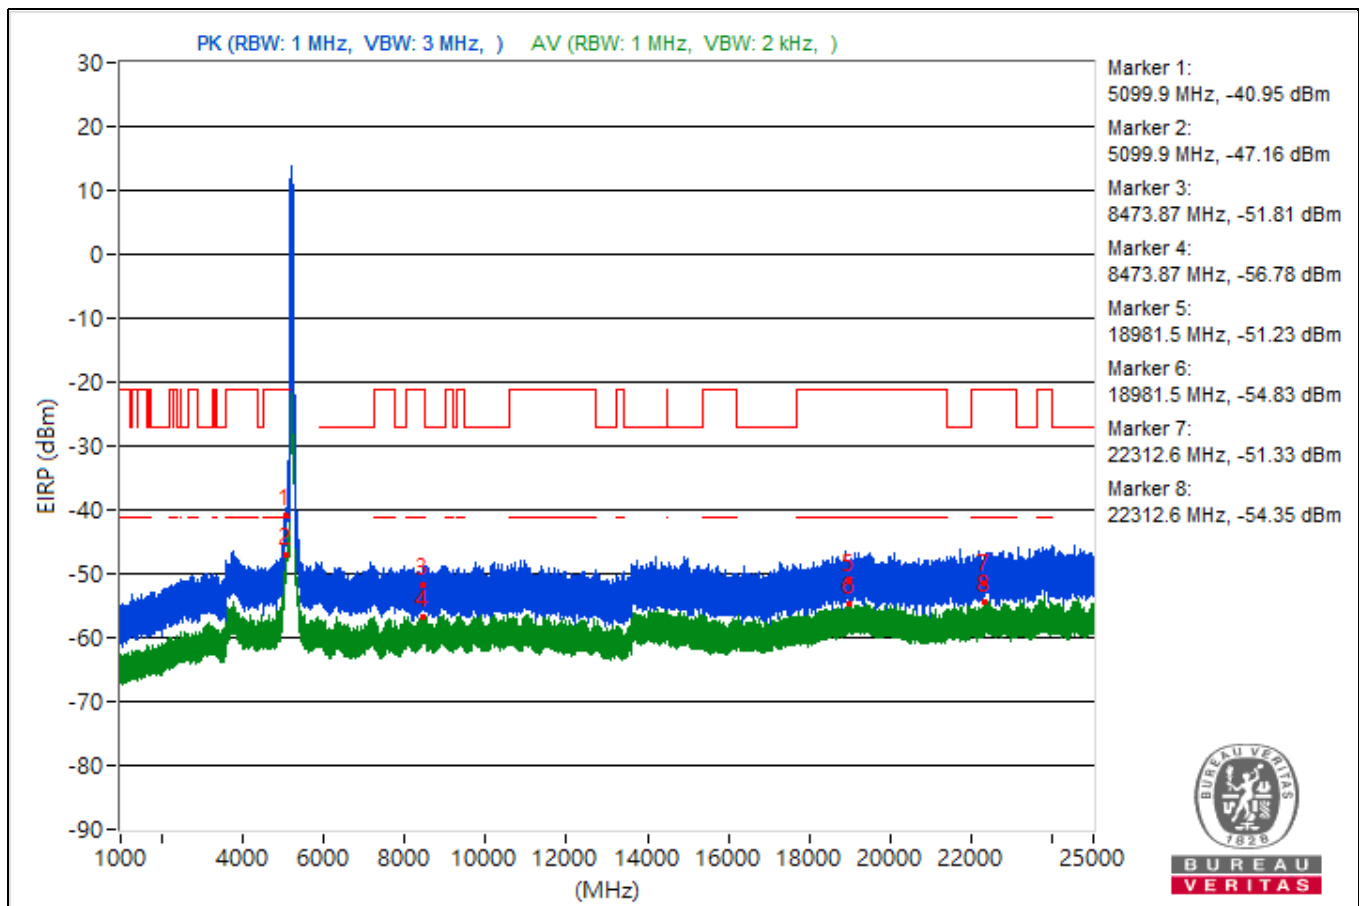


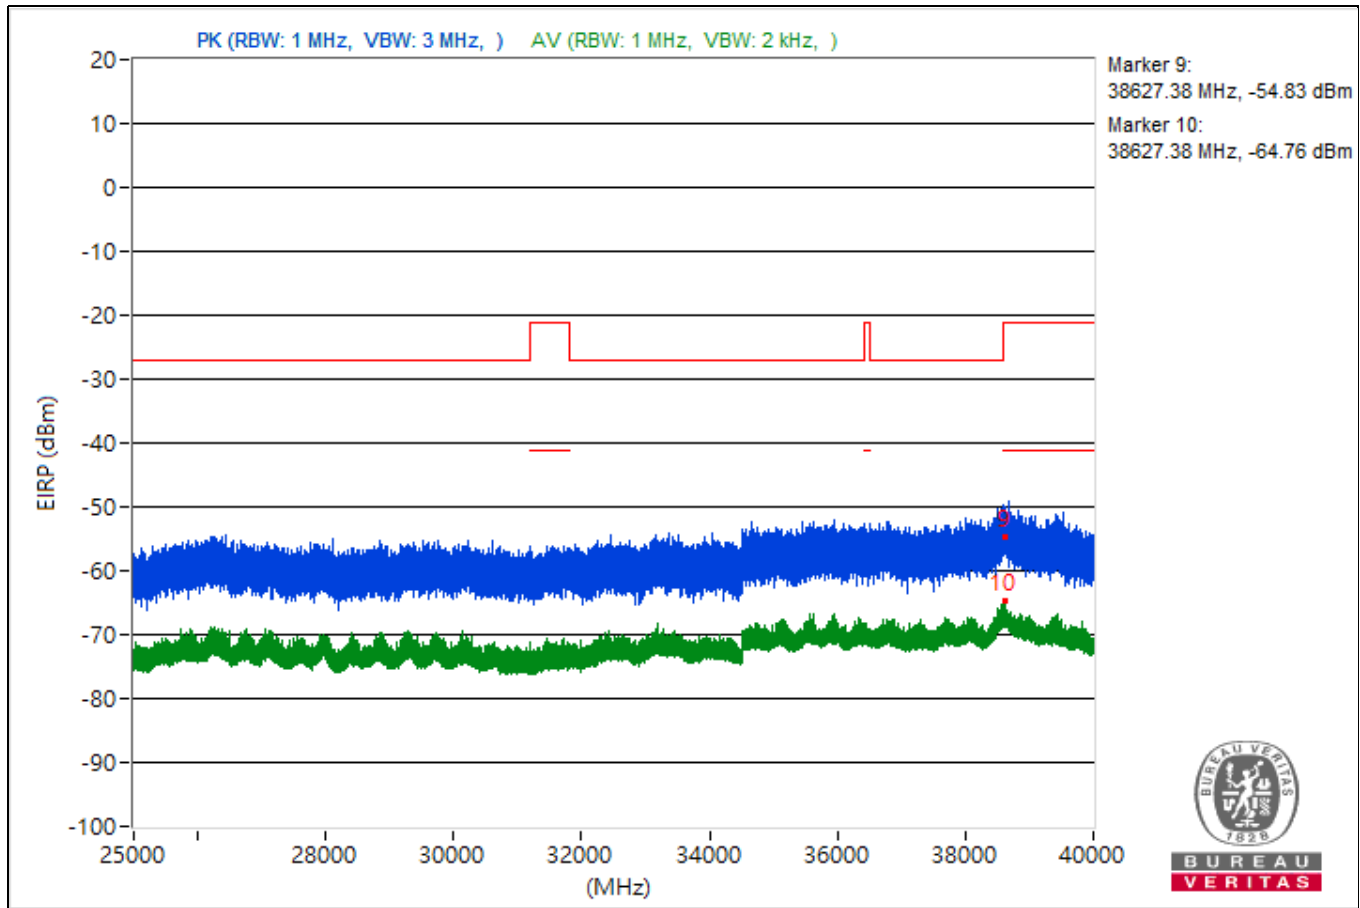


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.26	50.92 PK	74	-23.08	-52.79	-51.81	4.92	-44.34
2	5097.26	44.88 AV	54	-9.12	-57.83	-58.85	4.92	-50.38
3	10951.02	43.72 PK	74	-30.28	-59.12	-59.84	4.92	-51.54
4	10951.02	39.65 AV	54	-14.35	-66.85	-61.68	4.92	-55.61
5	18947.2	45.74 PK	74	-28.26	-59.93	-55.88	4.92	-49.52
6	18947.2	40.39 AV	54	-13.61	-64.96	-61.36	4.92	-54.87
7	23970.5	46.41 PK	74	-27.59	-55.8	-58.04	4.92	-48.85
8	23970.5	41.69 AV	54	-12.31	-60.14	-63.49	4.92	-53.57
9	38610.84	42 PK	74	-32	-62.03	-60.48	4.92	-53.26
10	38610.84	32.11 AV	54	-21.89	-72.37	-70.08	4.92	-63.15

Note: Margin value = Emission Level - Limit value

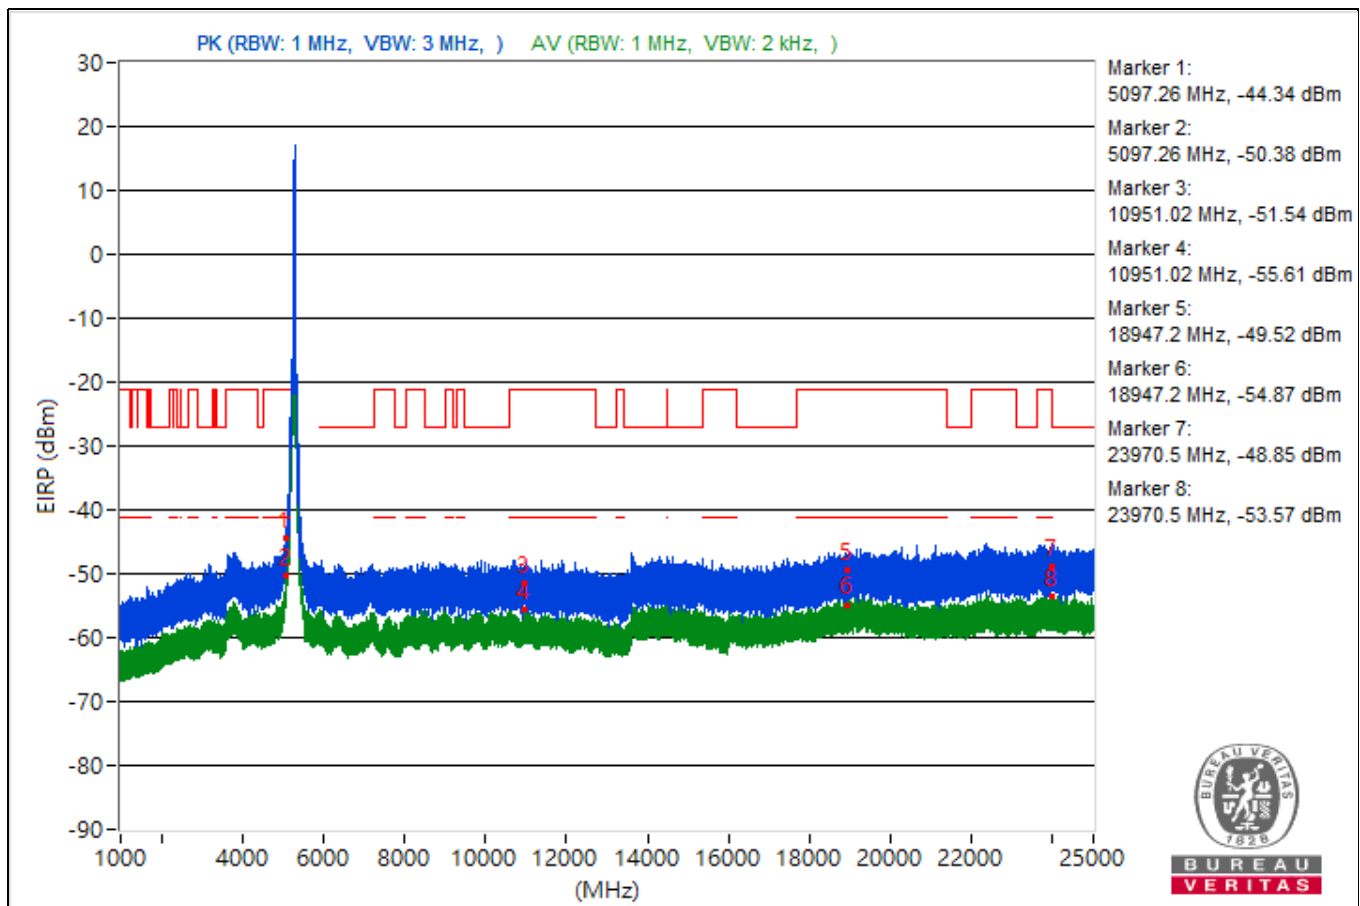


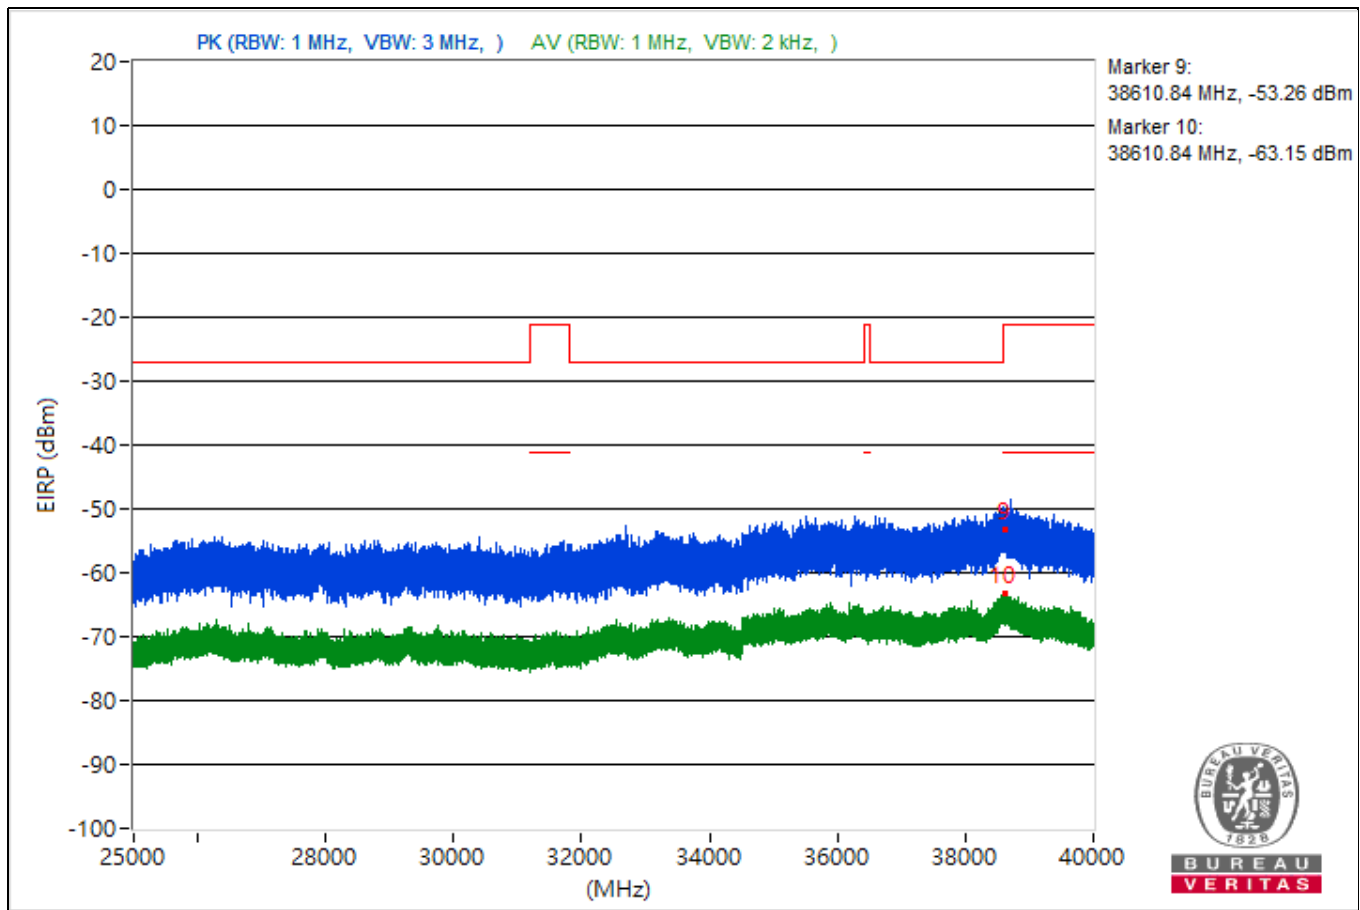


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.64	46.21 PK	74	-27.79	-56.3	-57.79	4.92	-49.05
2	3809.64	39.79 AV	54	-14.21	-61.74	-66.13	4.92	-55.47
3	11014.4	43.47 PK	74	-30.53	-59.37	-60.09	4.92	-51.79
4	11014.4	39.18 AV	54	-14.82	-62.68	-65.94	4.92	-56.08
5	18975.3	43.98 PK	74	-30.02	-60.24	-58.39	4.92	-51.28
6	18975.3	40.26 AV	54	-13.74	-66.19	-61.08	4.92	-55.00
7	19116.5	43.92 PK	74	-30.08	-59.16	-59.39	4.92	-51.34
8	19116.5	41.53 AV	54	-12.47	-59.92	-64.63	4.92	-53.73
9	38660.36	42.57 PK	74	-31.43	-58.44	-65.22	4.92	-52.69
10	38660.36	30.65 AV	54	-23.35	-71.65	-73.65	4.92	-64.61

Note: Margin value = Emission Level - Limit value

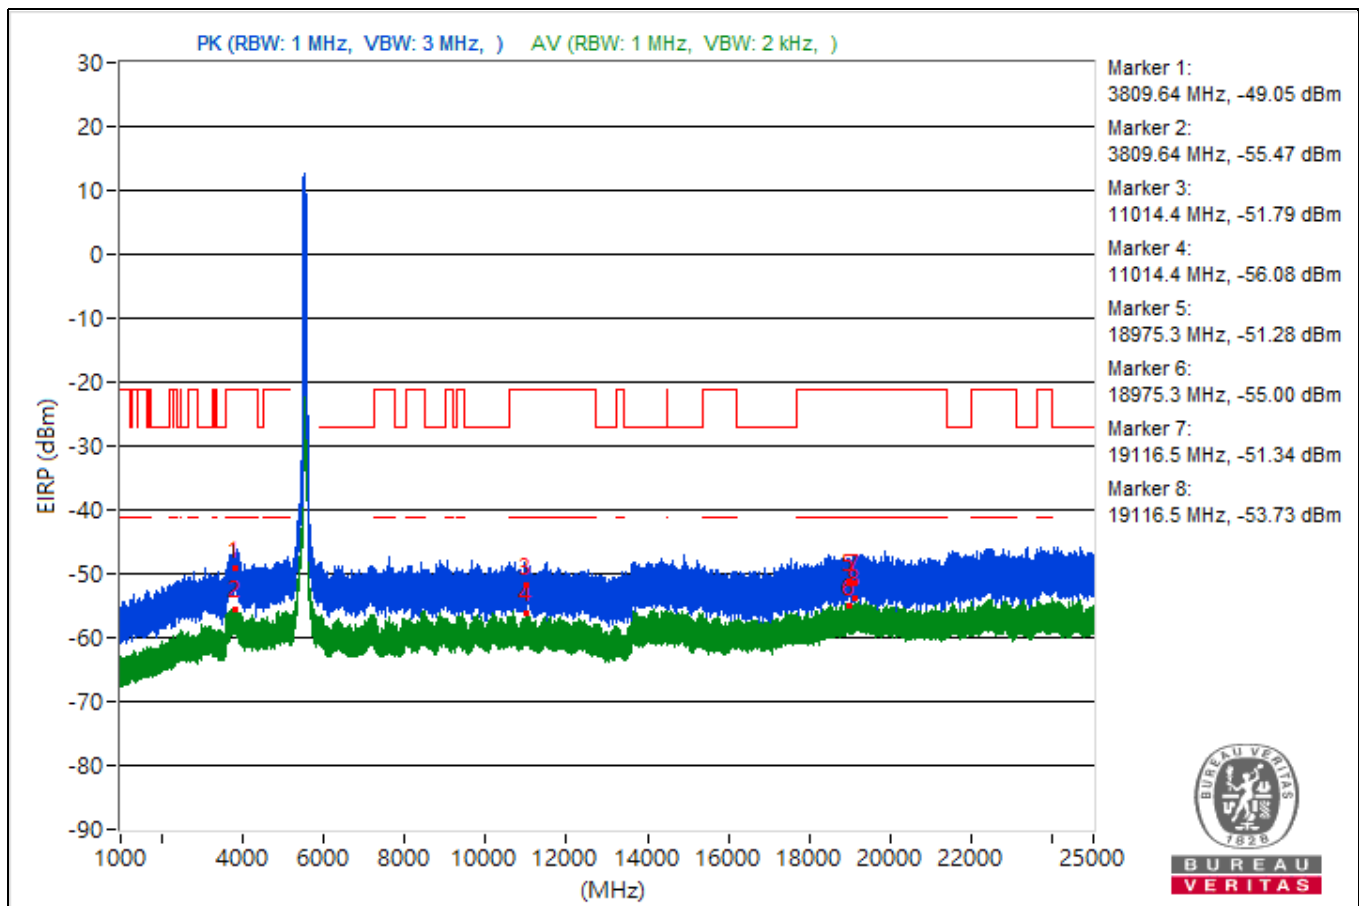


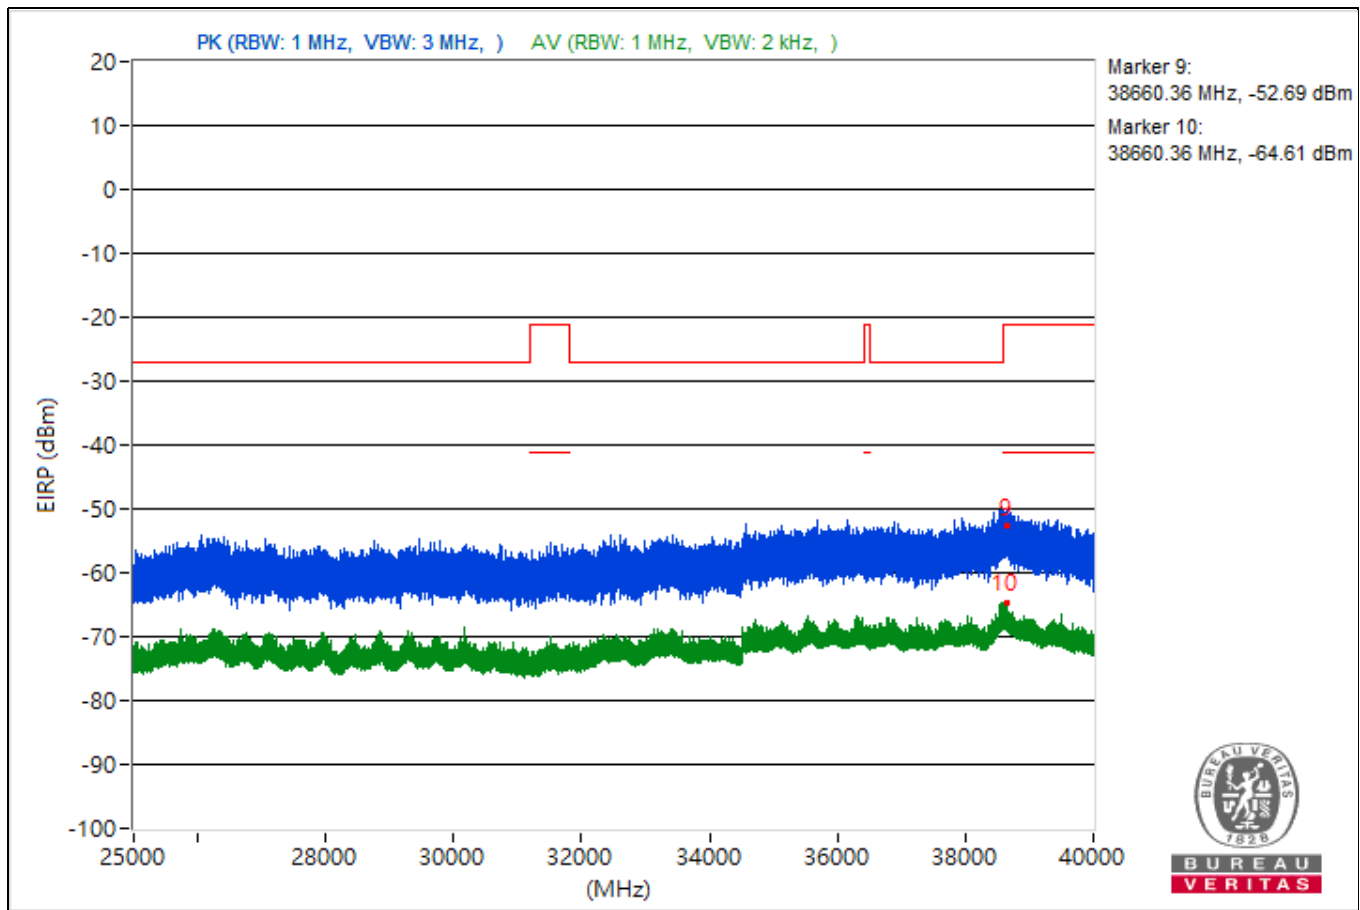


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3779.23	43.91 PK	74	-30.09	-58.73	-59.92	4.92	-51.35
2	3779.23	40.67 AV	54	-13.33	-61.41	-64.02	4.92	-54.59
3	10971.11	42.68 PK	74	-31.32	-60.43	-60.6	4.92	-52.58
4	10971.11	39.14 AV	54	-14.86	-62.19	-67.39	4.92	-56.12
5	18969.7	46.3 PK	74	-27.7	-57.33	-56.5	4.92	-48.96
6	18969.7	42.02 AV	54	-11.98	-60.51	-61.95	4.92	-53.24
7	23604.6	46.18 PK	74	-27.82	-57.76	-56.37	4.92	-49.08
8	23604.6	41.35 AV	54	-12.65	-60.15	-64.63	4.92	-53.91
9	38606.4	41.24 PK	74	-32.76	-60.37	-64.45	4.92	-54.02
10	38606.4	32.35 AV	54	-21.65	-73.19	-69.33	4.92	-62.91

Note: Margin value = Emission Level - Limit value

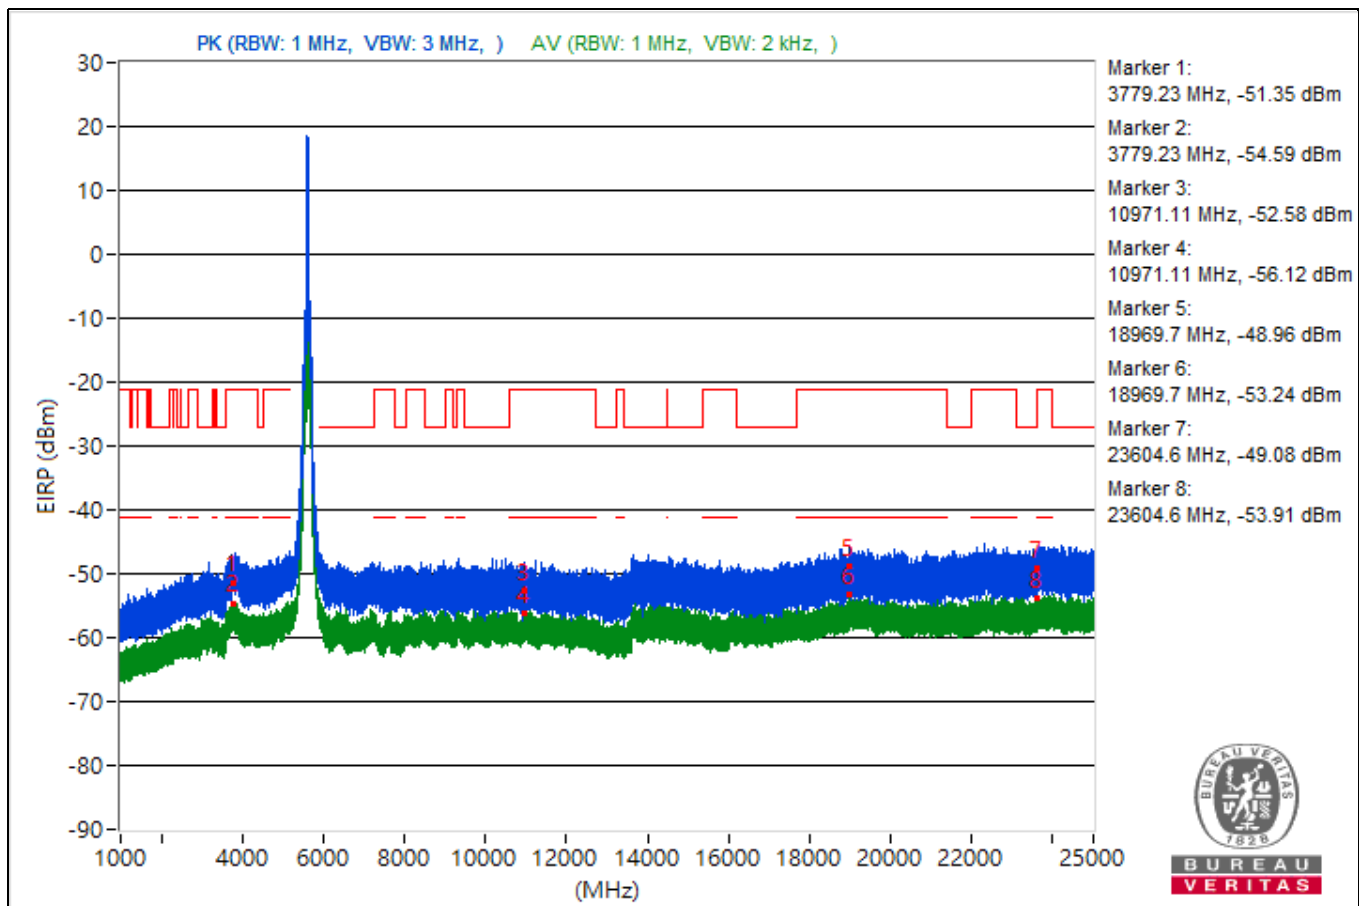


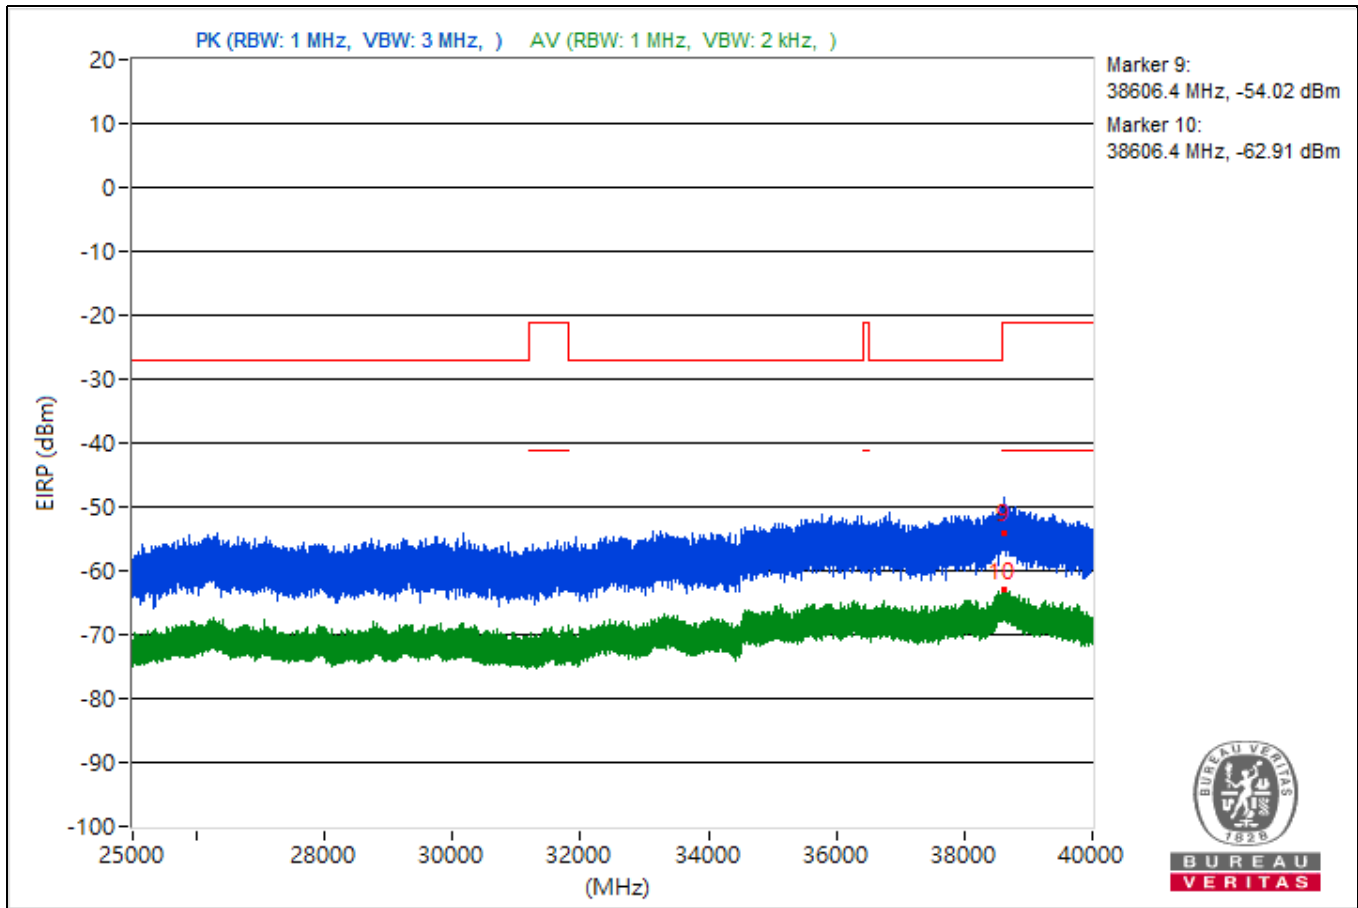


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3752.56	46.86 PK	74	-27.14	-55.67	-57.1	4.92	-48.4
2	3752.56	40.92 AV	54	-13.08	-60.46	-65.44	4.92	-54.34
3	8452.44	42.32 PK	74	-31.68	-59.76	-62.35	4.92	-52.94
4	8452.44	40.06 AV	54	-13.94	-62.31	-64.13	4.92	-55.2
5	18430.8	44.39 PK	74	-29.61	-59.26	-58.38	4.92	-50.87
6	18430.8	41.42 AV	54	-12.58	-63.38	-60.59	4.92	-53.84
7	23678	46.12 PK	74	-27.88	-57.4	-56.77	4.92	-49.14
8	23678	41.92 AV	54	-12.08	-64.54	-59.43	4.92	-53.34
9	38624.44	43.96 PK	74	-30.04	-58.72	-59.82	4.92	-51.3
10	38624.44	32.76 AV	54	-21.24	-71.52	-69.56	4.92	-62.5

Note: Margin value = Emission Level - Limit value

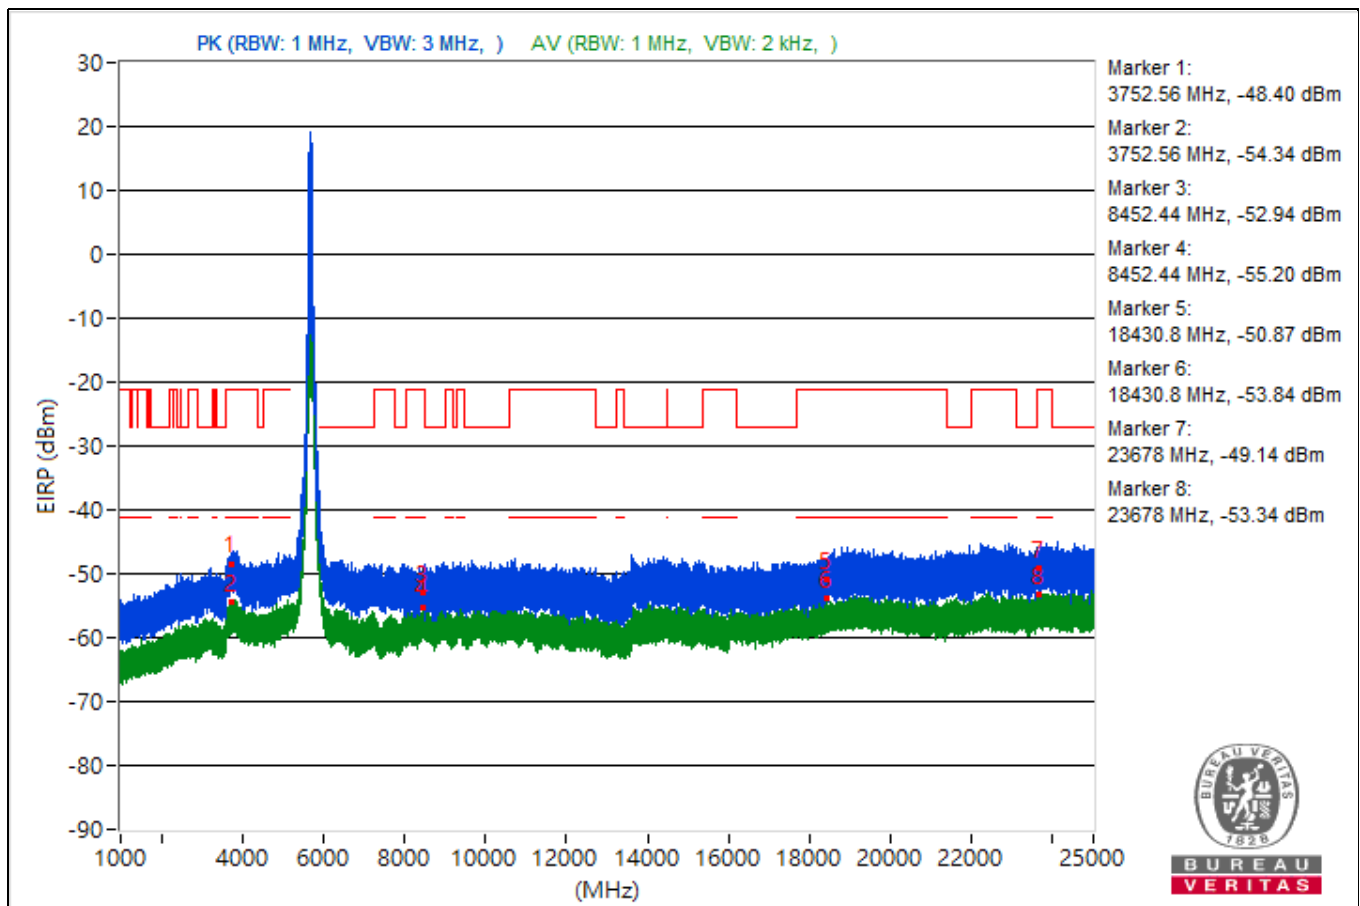


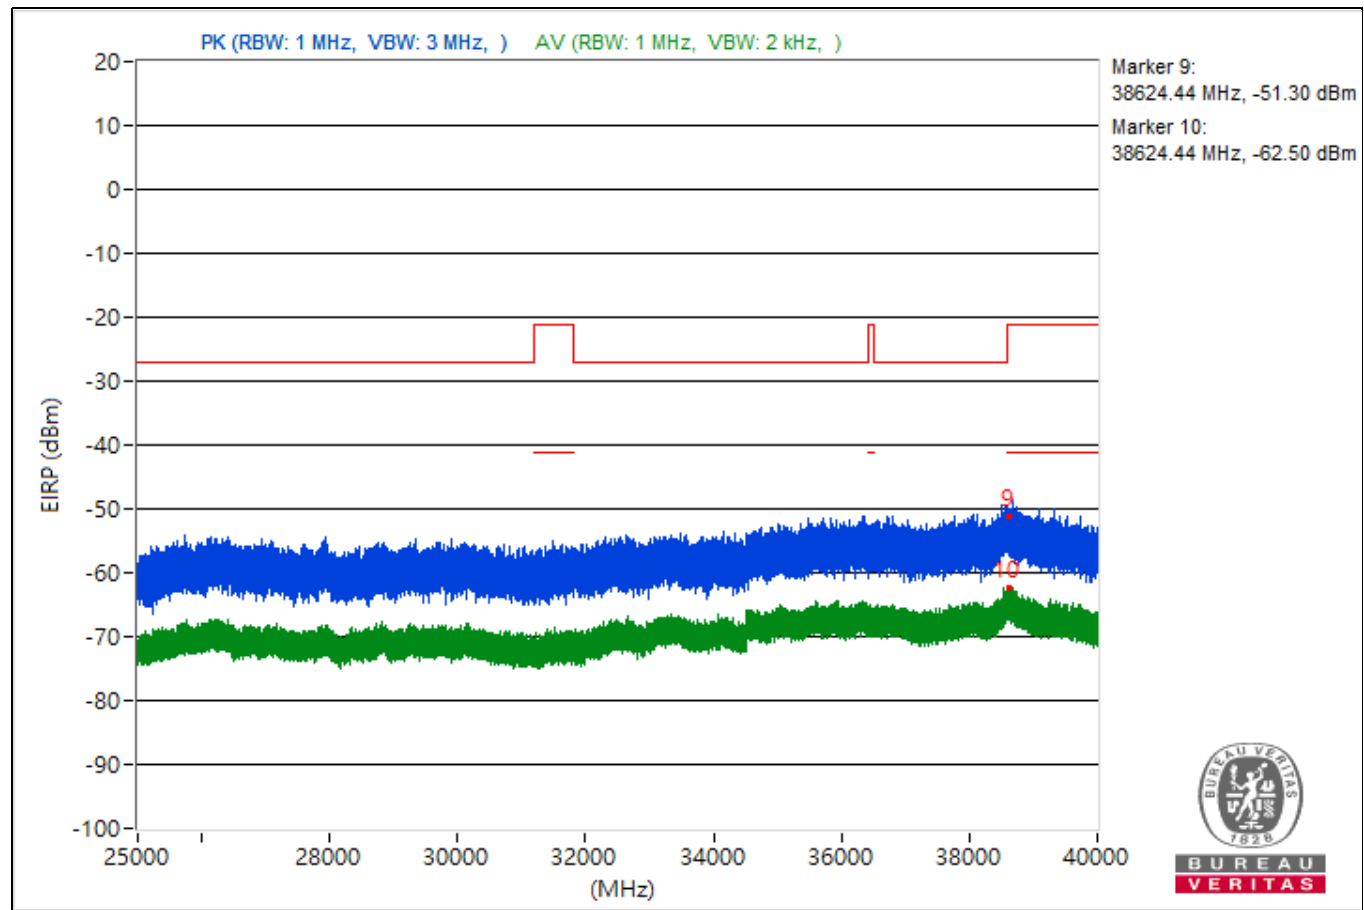


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4851.32	45.3 PK	74	-28.7	-57.68	-58.12	4.92	-49.96
2	4851.32	41.79 AV	54	-12.21	-61.52	-61.28	4.92	-53.47
3	11102.31	42.7 PK	74	-31.3	-60.05	-60.97	4.92	-52.56
4	11102.31	39.26 AV	54	-14.74	-66.1	-62.49	4.92	-56.00
5	18564	45.47 PK	74	-28.53	-61.17	-55.83	4.92	-49.79
6	18564	40.64 AV	54	-13.36	-65.93	-60.67	4.92	-54.62
7	23892.5	45.63 PK	74	-28.37	-57.1	-58.07	4.92	-49.63
8	23892.5	41.59 AV	54	-12.41	-64.81	-59.78	4.92	-53.67
9	38637.07	41.17 PK	74	-32.83	-63.47	-60.93	4.92	-54.09
10	38637.07	32.5 AV	54	-21.5	-70.08	-71.42	4.92	-62.76

Note: Margin value = Emission Level - Limit value

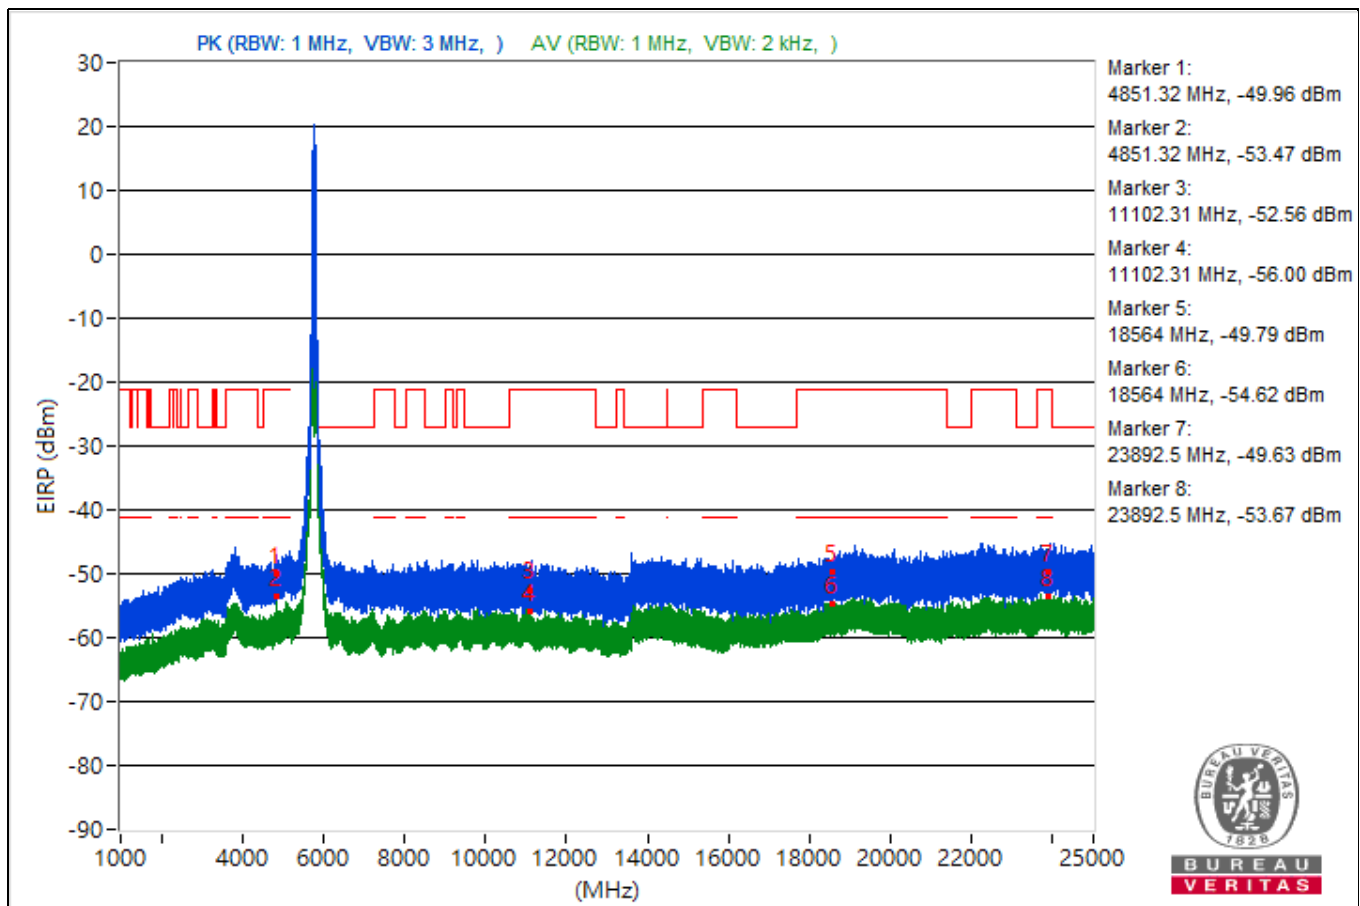


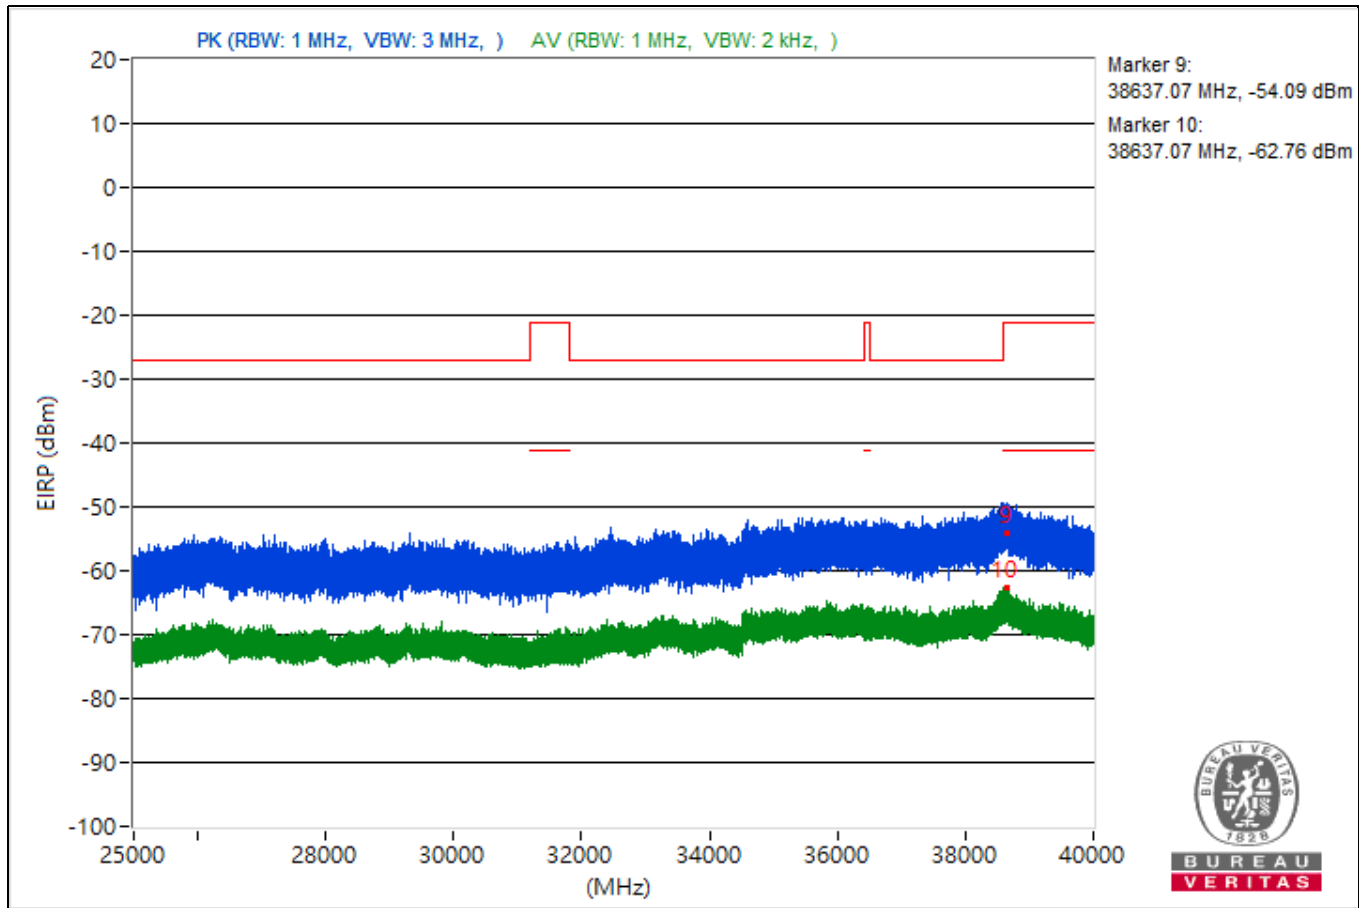


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.17	56.09 PK	74	-17.91	-49.34	-45.62	4.92	-39.17
2	5096.17	47.58 AV	54	-6.42	-55.18	-56.08	4.92	-47.68
3	11062.58	42.57 PK	74	-31.43	-60.14	-61.16	4.92	-52.69
4	11062.58	37.6 AV	54	-16.4	-68.13	-63.99	4.92	-57.66
5	18958.1	43.15 PK	74	-30.85	-59.33	-60.9	4.92	-52.11
6	18958.1	39.82 AV	54	-14.18	-62.54	-64.39	4.92	-55.44
7	22632.5	41.65 PK	74	-32.35	-61.02	-62.12	4.92	-53.61
8	22632.5	39.89 AV	54	-14.11	-61.43	-66.67	4.92	-55.37
9	38621.78	40.93 PK	74	-33.07	-63.06	-61.59	4.92	-54.33
10	38621.78	31.8 AV	54	-22.2	-70.23	-72.99	4.92	-63.46

Note: Margin value = Emission Level - Limit value

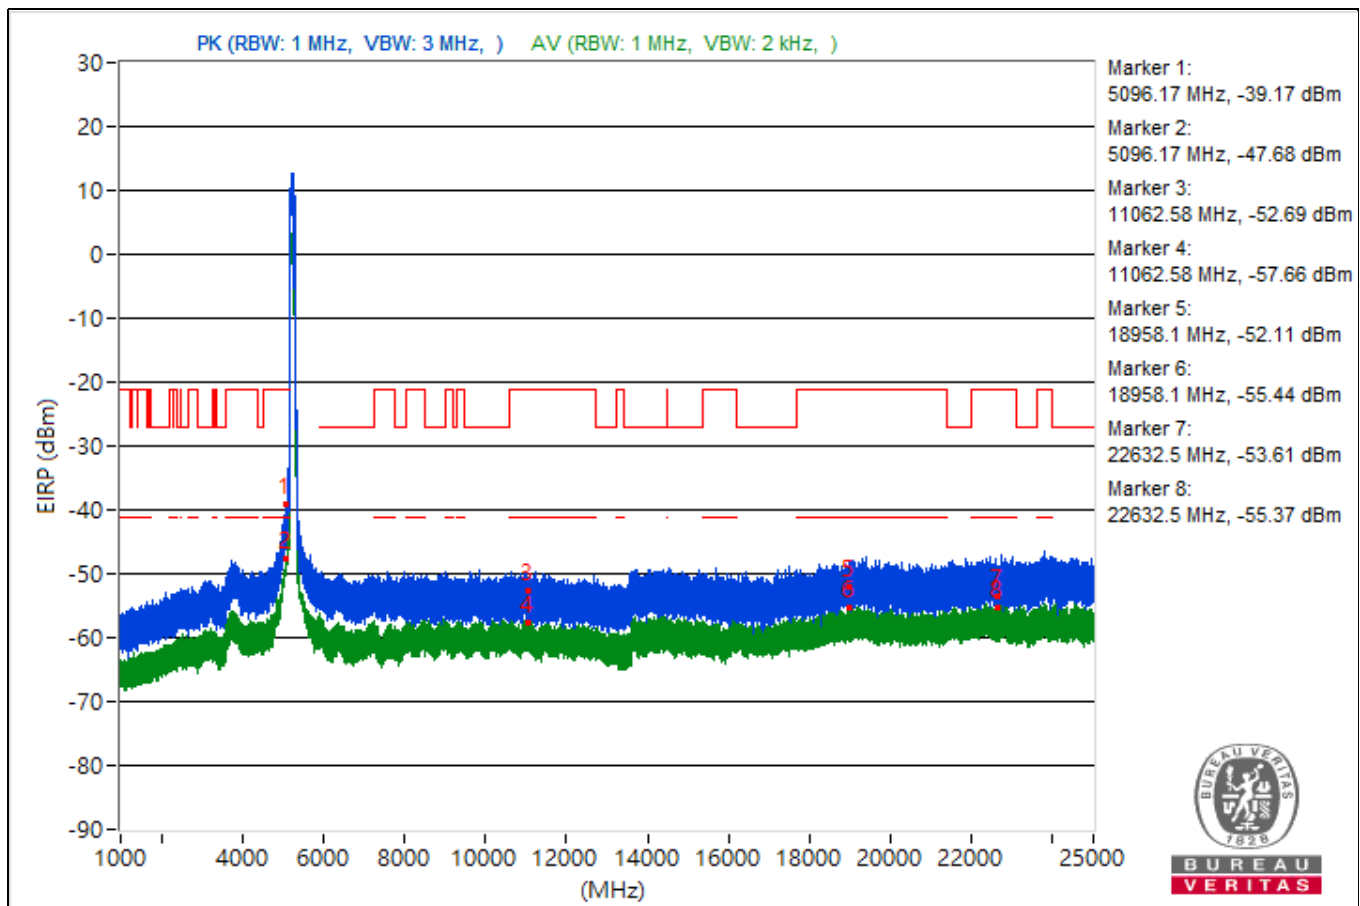


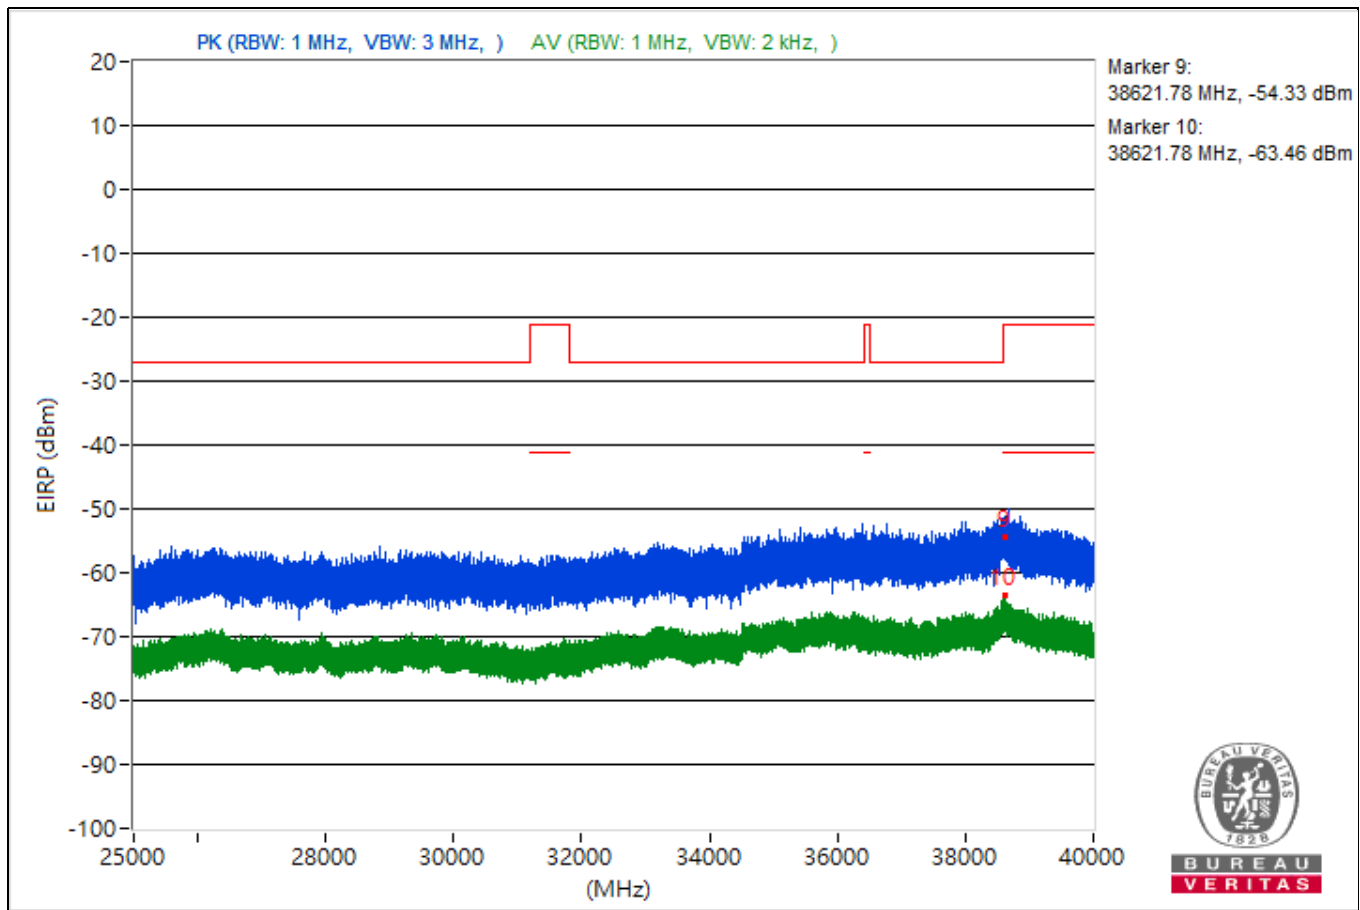


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5079.68	44.49 PK	74	-29.51	-57.82	-59.82	4.92	-50.77
2	5079.68	40.03 AV	54	-13.97	-65.57	-61.62	4.92	-55.23
3	10725.96	42.49 PK	74	-31.51	-60.16	-61.31	4.92	-52.77
4	10725.96	37.59 AV	54	-16.41	-64.56	-66.98	4.92	-57.67
5	18860	42.42 PK	74	-31.58	-60.25	-61.36	4.92	-52.84
6	18860	38.73 AV	54	-15.27	-68.67	-62.36	4.92	-56.53
7	22398.8	43.53 PK	74	-30.47	-60.1	-59.27	4.92	-51.73
8	22398.8	40.57 AV	54	-13.43	-64.76	-61.19	4.92	-54.69
9	38643.64	39.33 PK	74	-34.67	-62.99	-64.96	4.92	-55.93
10	38643.64	30.81 AV	54	-23.19	-75.08	-70.73	4.92	-64.45

Note: Margin value = Emission Level - Limit value

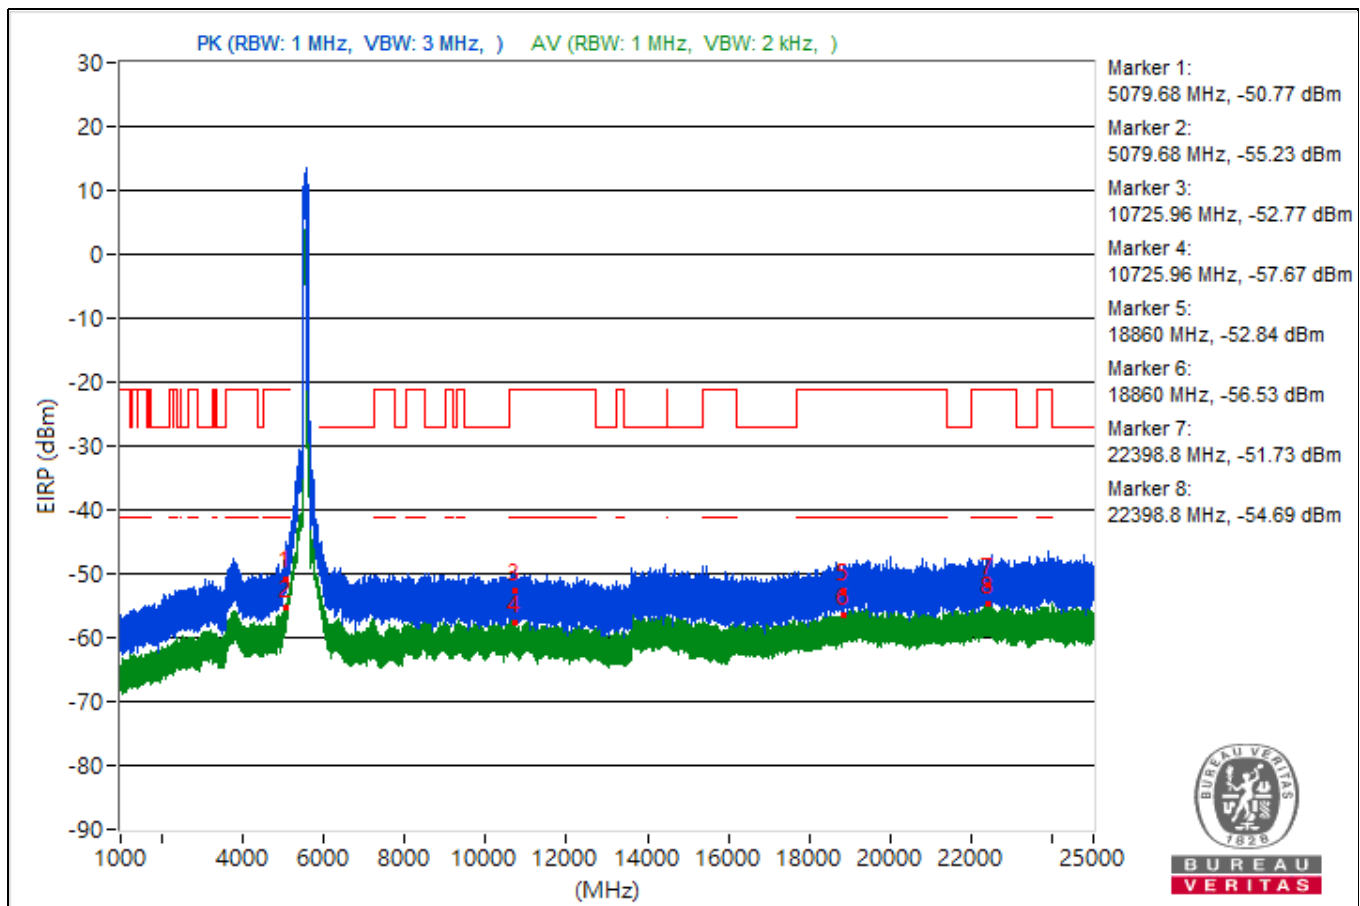


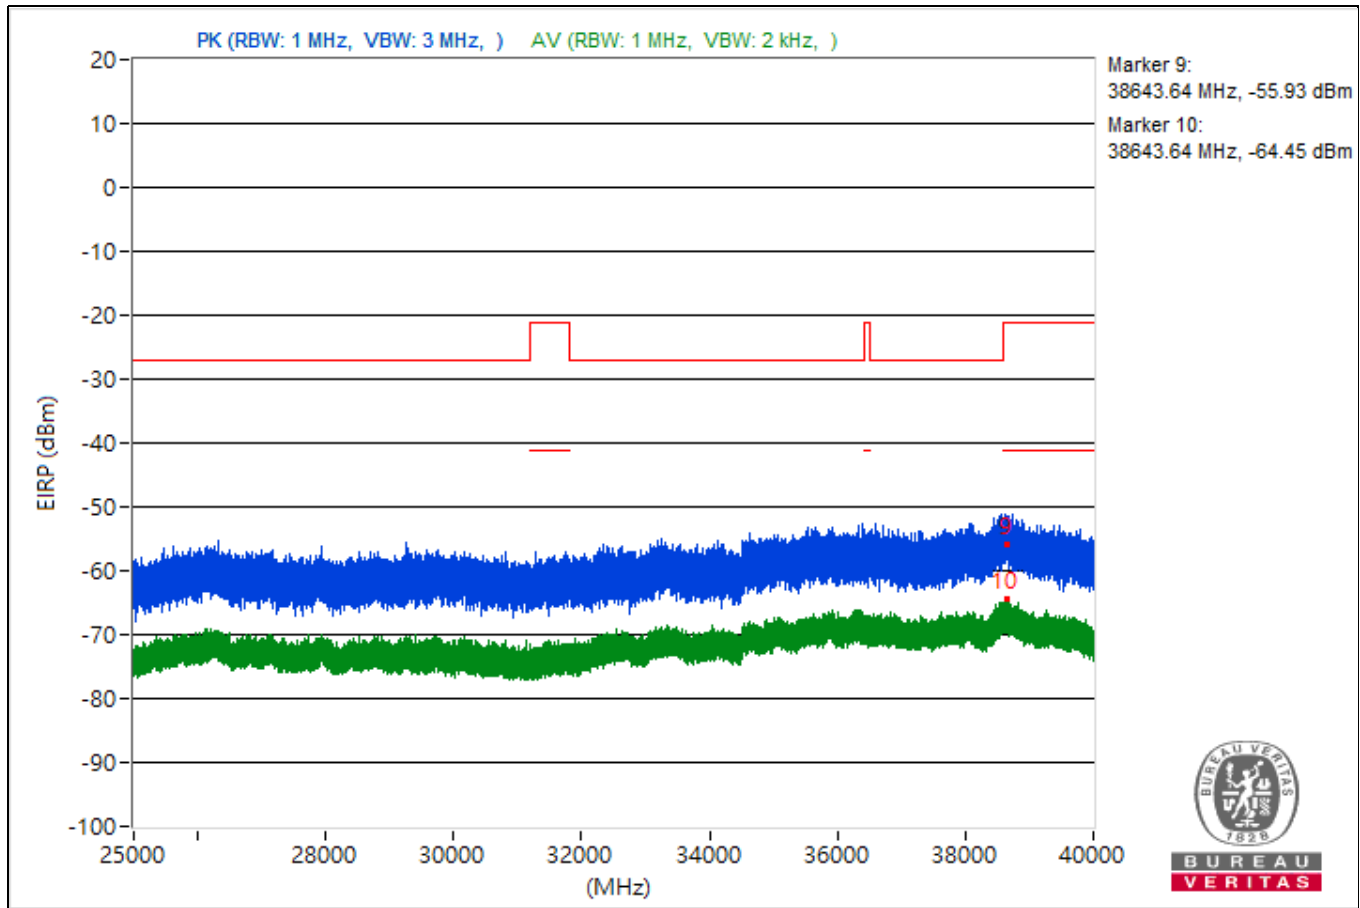


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5089.79	54.48 PK	74	-19.52	-49.2	-48.27	4.92	-40.78
2	5089.79	47.83 AV	54	-6.17	-56.61	-54.39	4.92	-47.43
3	9318.04	41.74 PK	74	-32.26	-67.38	-59.03	4.92	-53.52
4	9318.04	37.74 AV	54	-16.26	-64.38	-66.86	4.92	-57.52
5	18846.3	41 PK	74	-33	-61.97	-62.42	4.92	-54.26
6	18846.3	39.48 AV	54	-14.52	-65.54	-62.43	4.92	-55.78
7	23729.9	44.33 PK	74	-29.67	-60.01	-57.95	4.92	-50.93
8	23729.9	39.74 AV	54	-14.26	-66.2	-61.79	4.92	-55.52
9	38613.78	40.34 PK	74	-33.66	-61.79	-64.26	4.92	-54.92
10	38613.78	30.65 AV	54	-23.35	-71.55	-73.82	4.92	-64.61

Note: Margin value = Emission Level - Limit value

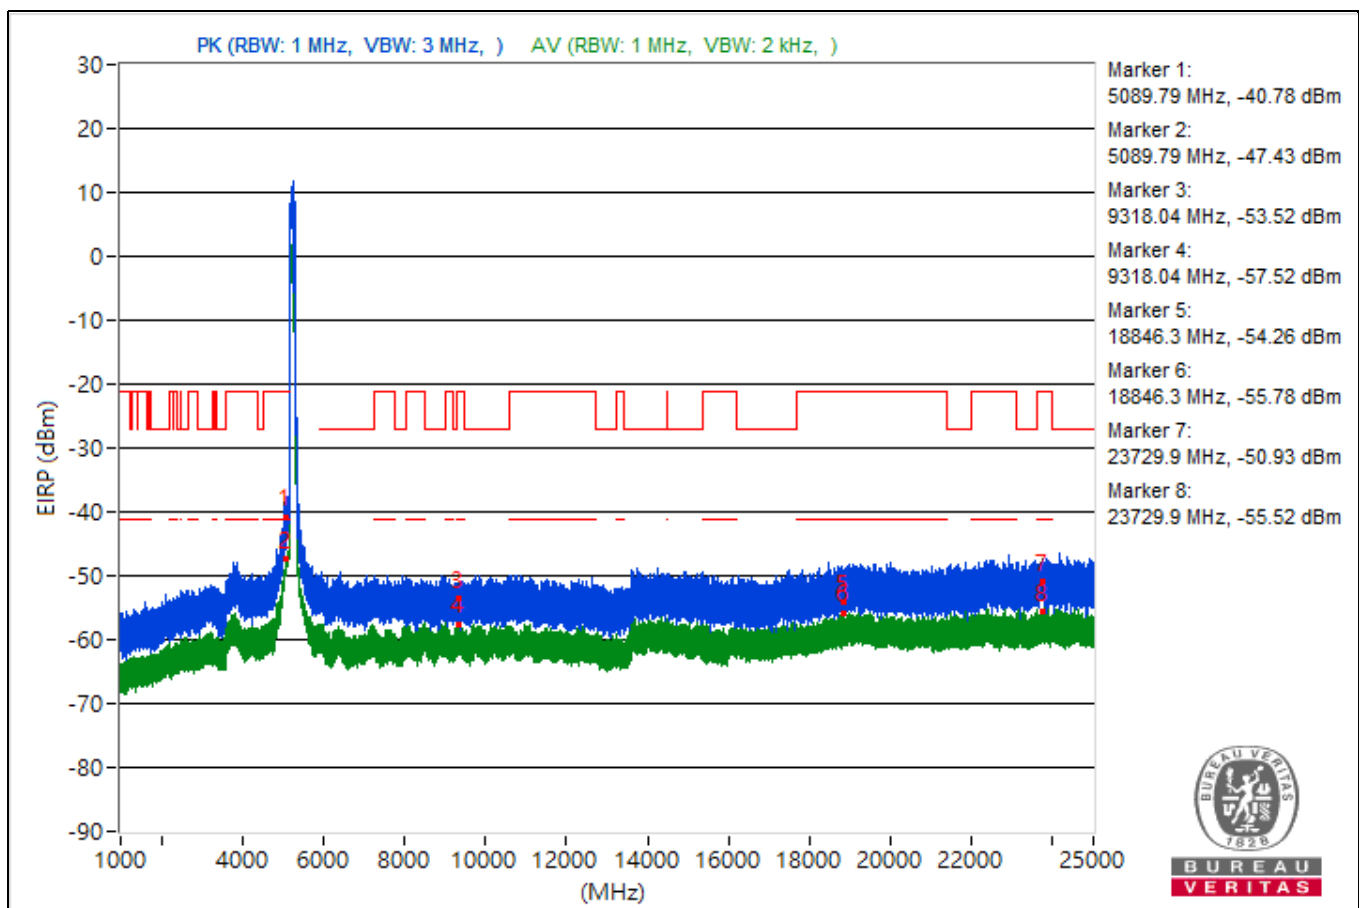


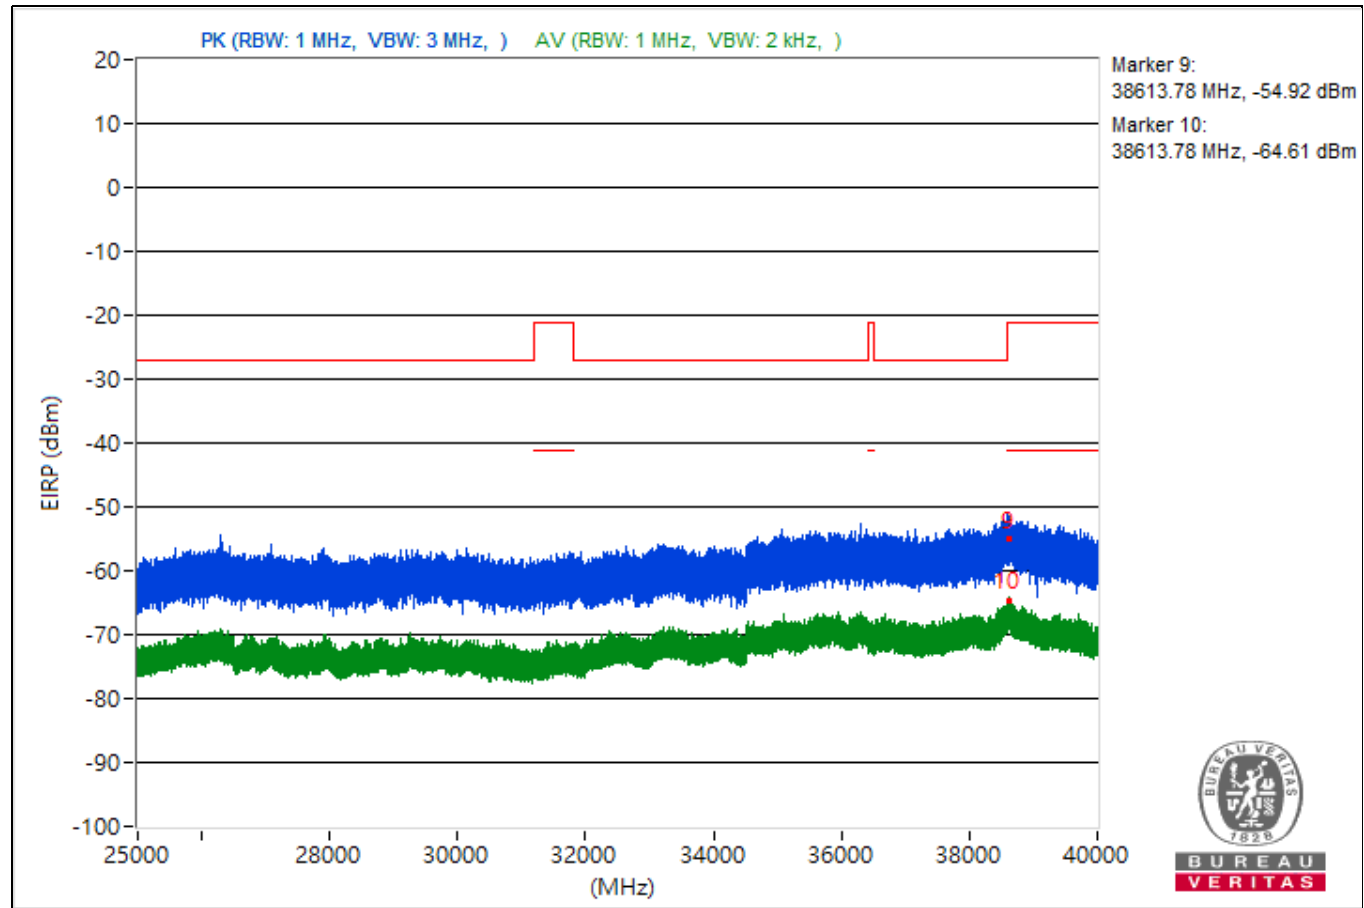


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5089.79	54.48 PK	74	-19.52	-49.2	-48.27	4.92	-40.78
2	5089.79	47.83 AV	54	-6.17	-56.61	-54.39	4.92	-47.43
3	9318.04	41.74 PK	74	-32.26	-67.38	-59.03	4.92	-53.52
4	9318.04	37.74 AV	54	-16.26	-64.38	-66.86	4.92	-57.52
5	18846.3	41 PK	74	-33	-61.97	-62.42	4.92	-54.26
6	18846.3	39.48 AV	54	-14.52	-65.54	-62.43	4.92	-55.78
7	23729.9	44.33 PK	74	-29.67	-60.01	-57.95	4.92	-50.93
8	23729.9	39.74 AV	54	-14.26	-66.2	-61.79	4.92	-55.52
9	38613.78	40.34 PK	74	-33.66	-61.79	-64.26	4.92	-54.92
10	38613.78	30.65 AV	54	-23.35	-71.55	-73.82	4.92	-64.61

Note: Margin value = Emission Level - Limit value

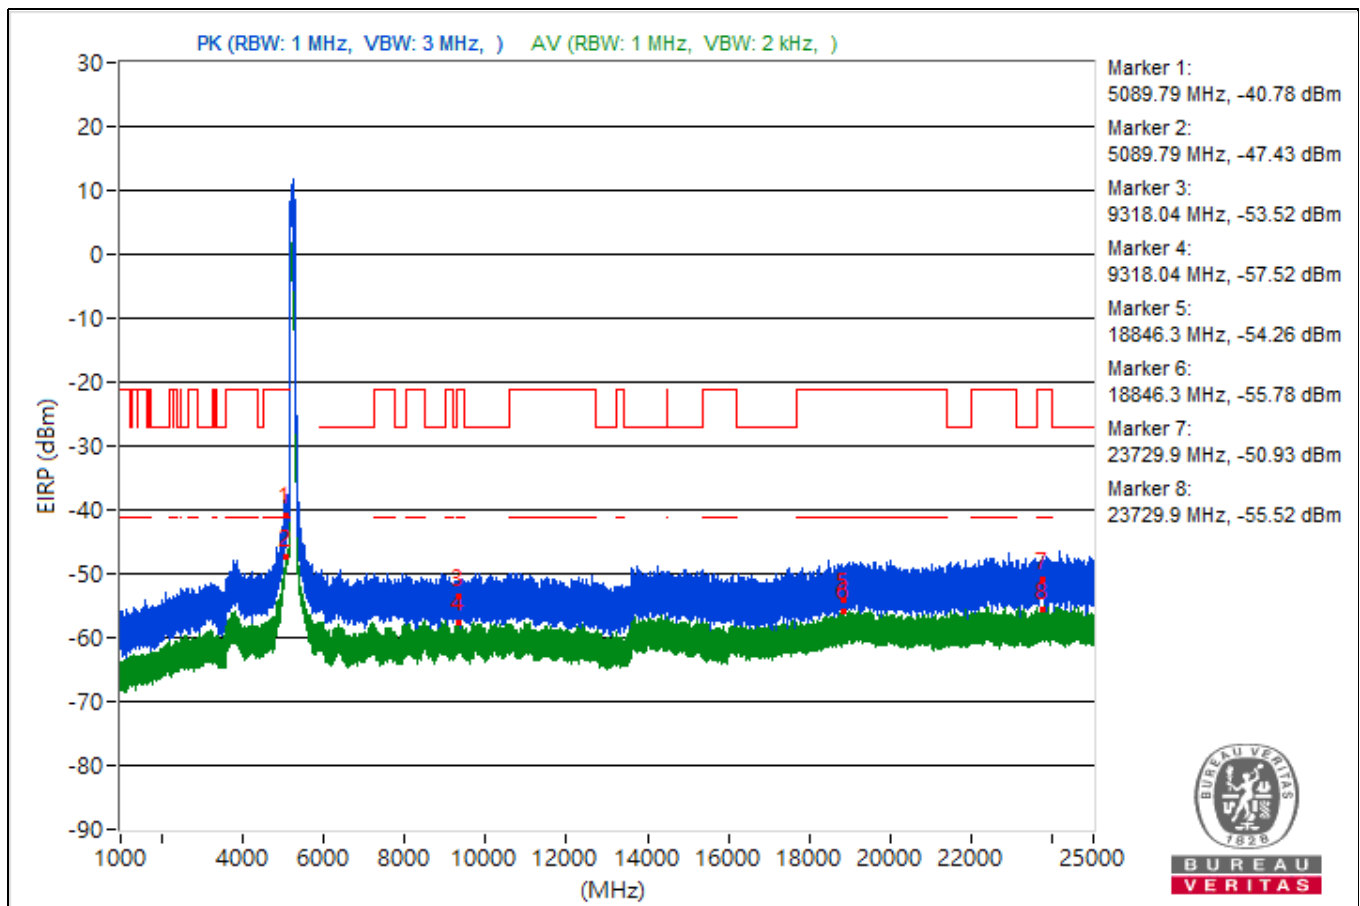

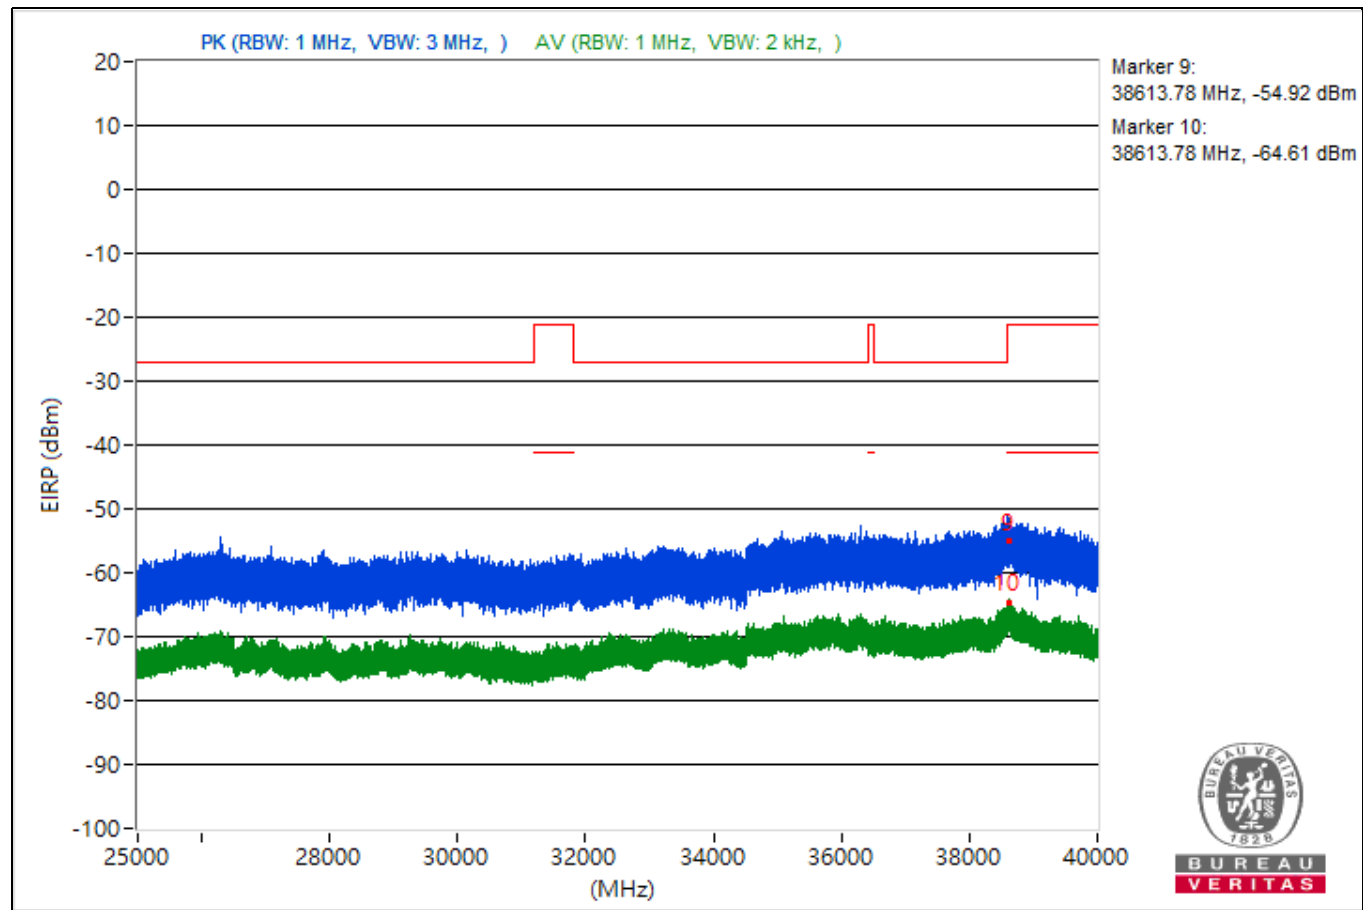


Conducted Band Edges

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5178.77	118.75 PK			12.72	12.36	7.93	23.49
2	*5178.77	110.74 AV			4.93	4.12	7.93	15.48
3	5149.2	60.19 PK	74	-13.81	-47.16	-45.1	7.93	-35.07
4	5149.2	50.82 AV	54	-3.18	-55.35	-55.41	7.93	-44.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

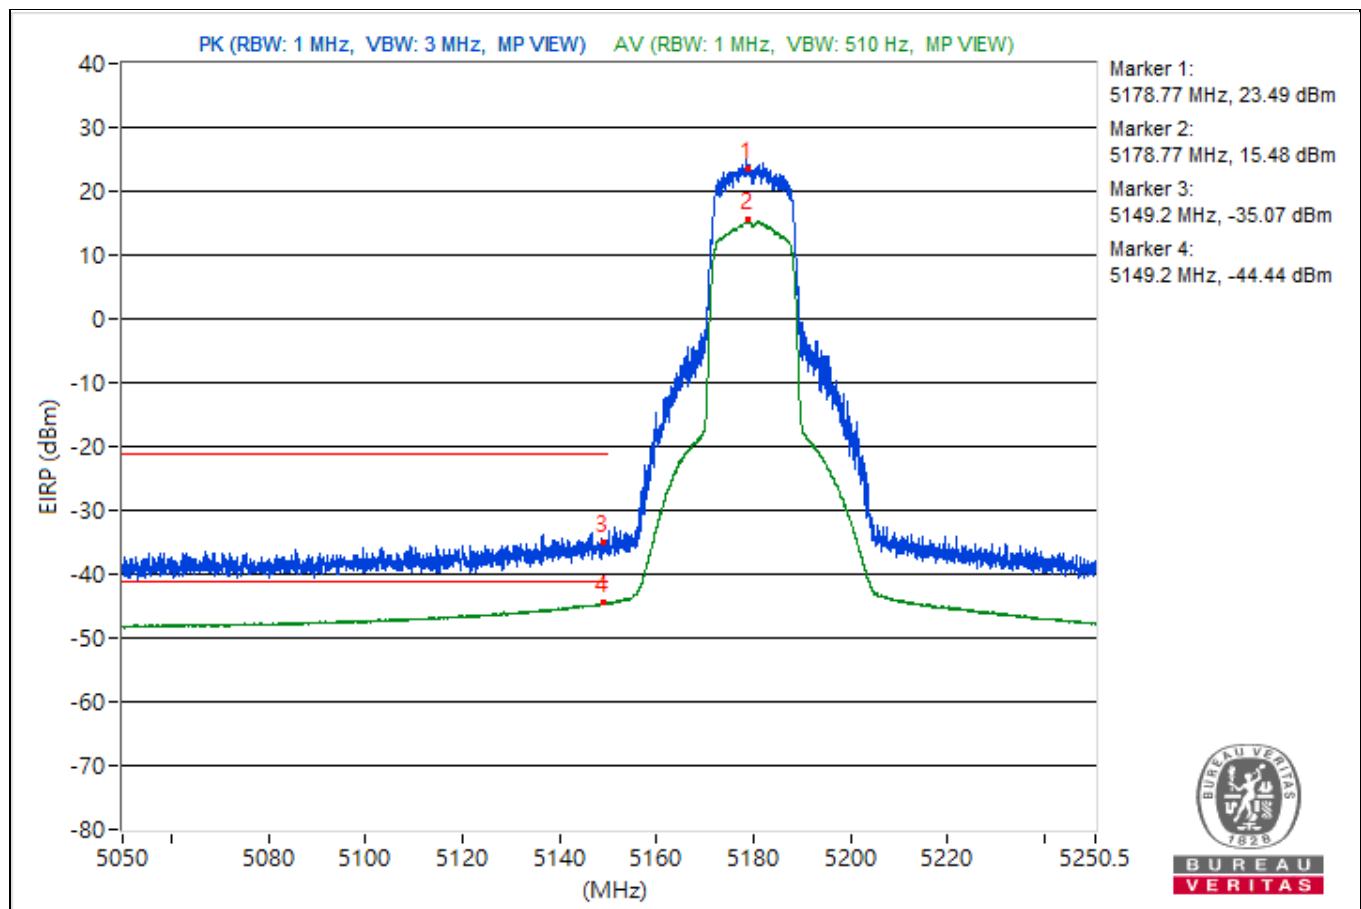


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5198.87	121.02 PK			14.32	15.26	7.93	25.76
2	*5198.87	112.93 AV			6.89	6.56	7.93	17.67
3	5148.97	61.13 PK	74	-12.87	-44.56	-45.66	7.93	-34.13
4	5148.97	52.01 AV	54	-1.99	-54.06	-54.32	7.93	-43.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

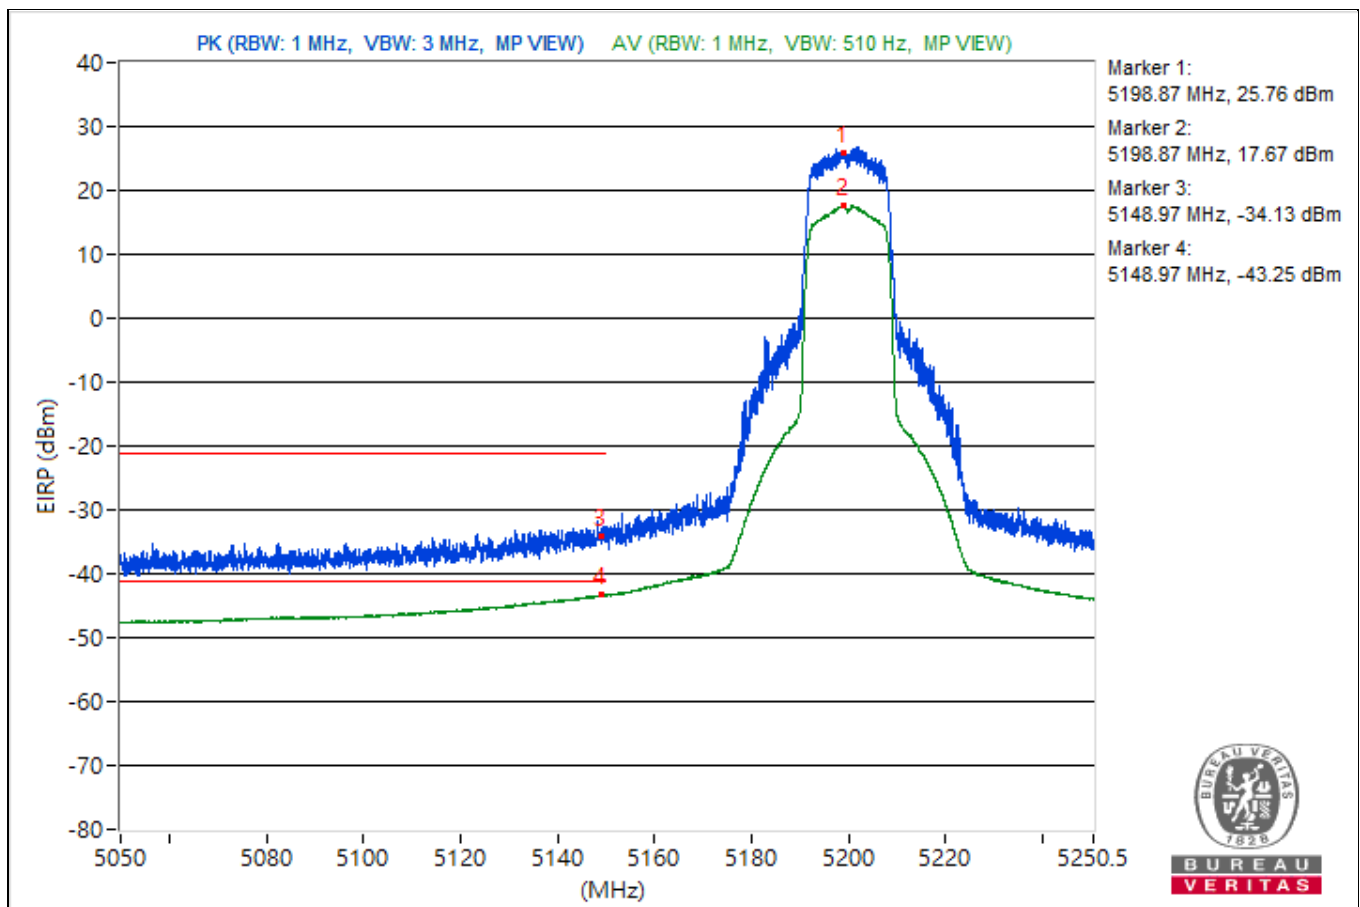


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5241.15	120.66 PK			15.06	13.77	7.93	25.4
2	*5241.15	112.7 AV			6.78	6.19	7.93	17.44
3	5149.45	57.6 PK	74	-16.4	-48.15	-49.11	7.93	-37.66
4	5149.45	49.2 AV	54	-4.8	-57.23	-56.79	7.93	-46.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

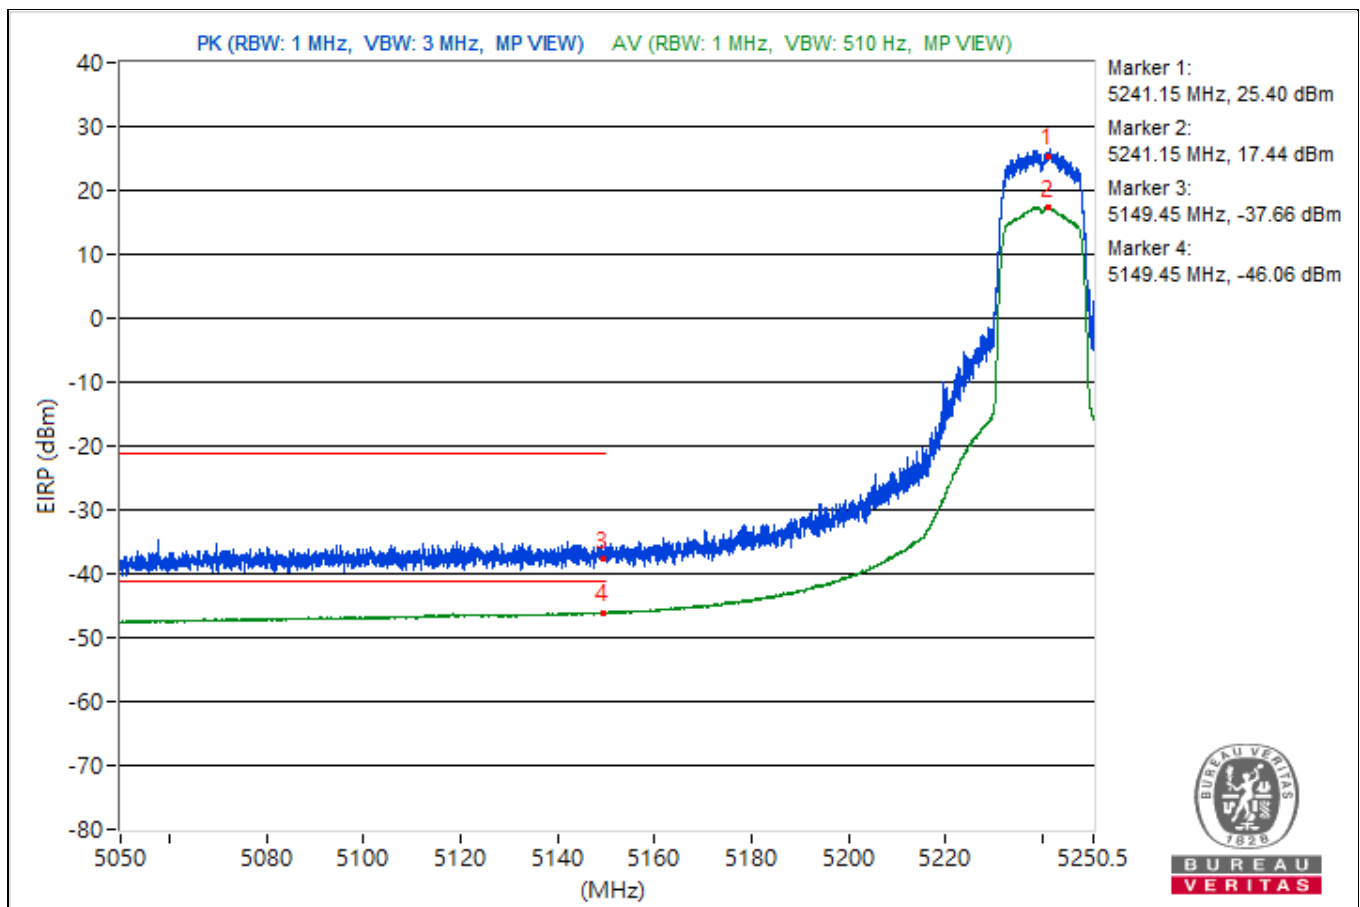


RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5261.53	118.15 PK			14.96	-54.35	7.93	22.89
2	*5261.53	109.45 AV			6.26	-63.4	7.93	14.19
3	5353.06	54.33 PK	74	-19.67	-49.91	-55.55	7.93	-40.93
4	5353.06	45.31 AV	54	-8.69	-59.13	-63.89	7.93	-49.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

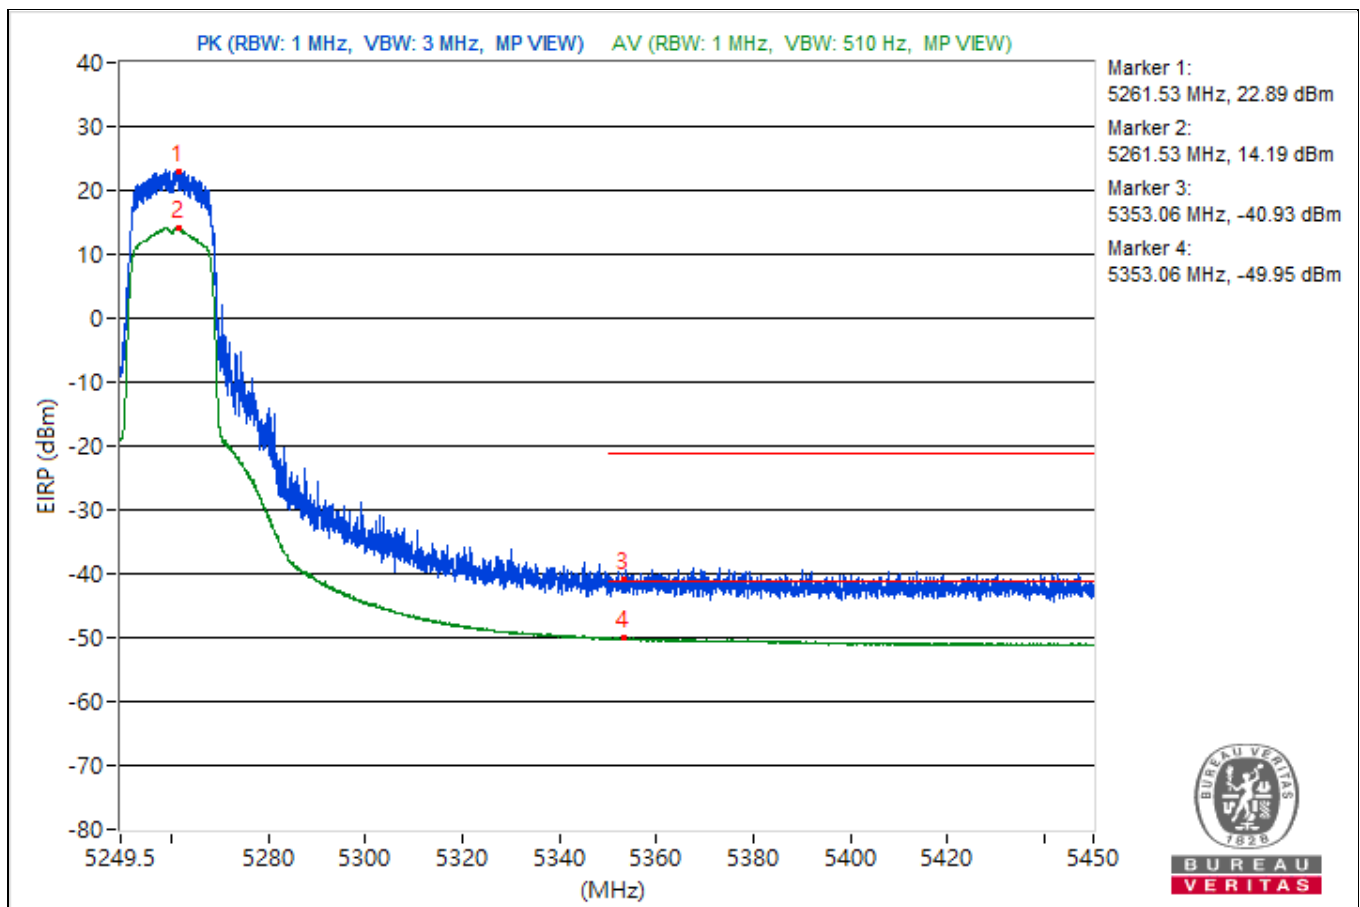


RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5298.6	120.58 PK			15.11	13.51	7.93	25.32
2	*5298.6	112.69 AV			6.4	6.57	7.93	17.43
3	5350.55	58.84 PK	74	-15.16	-46.63	-48.24	7.93	-36.42
4	5350.55	50.27 AV	54	-3.73	-55.56	-56.35	7.93	-44.99

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

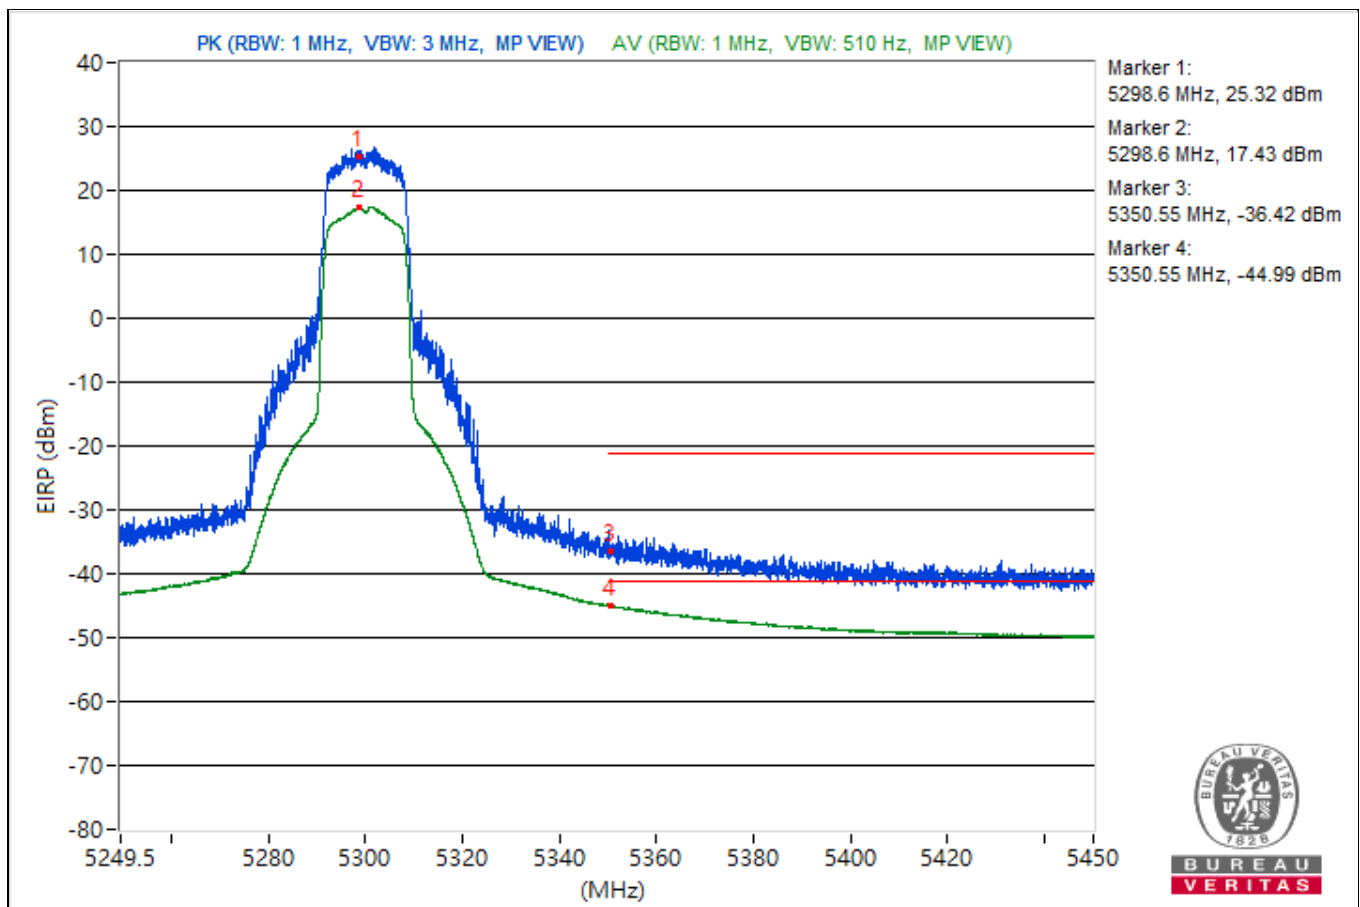


RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5318.97	120.25 PK			13.19	14.77	7.93	24.99
2	*5318.97	111.66 AV			5.47	5.44	7.93	16.4
3	5350	59.19 PK	74	-14.81	-47.62	-46.47	7.93	-36.07
4	5350	50.82 AV	54	-3.18	-55.44	-55.33	7.93	-44.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

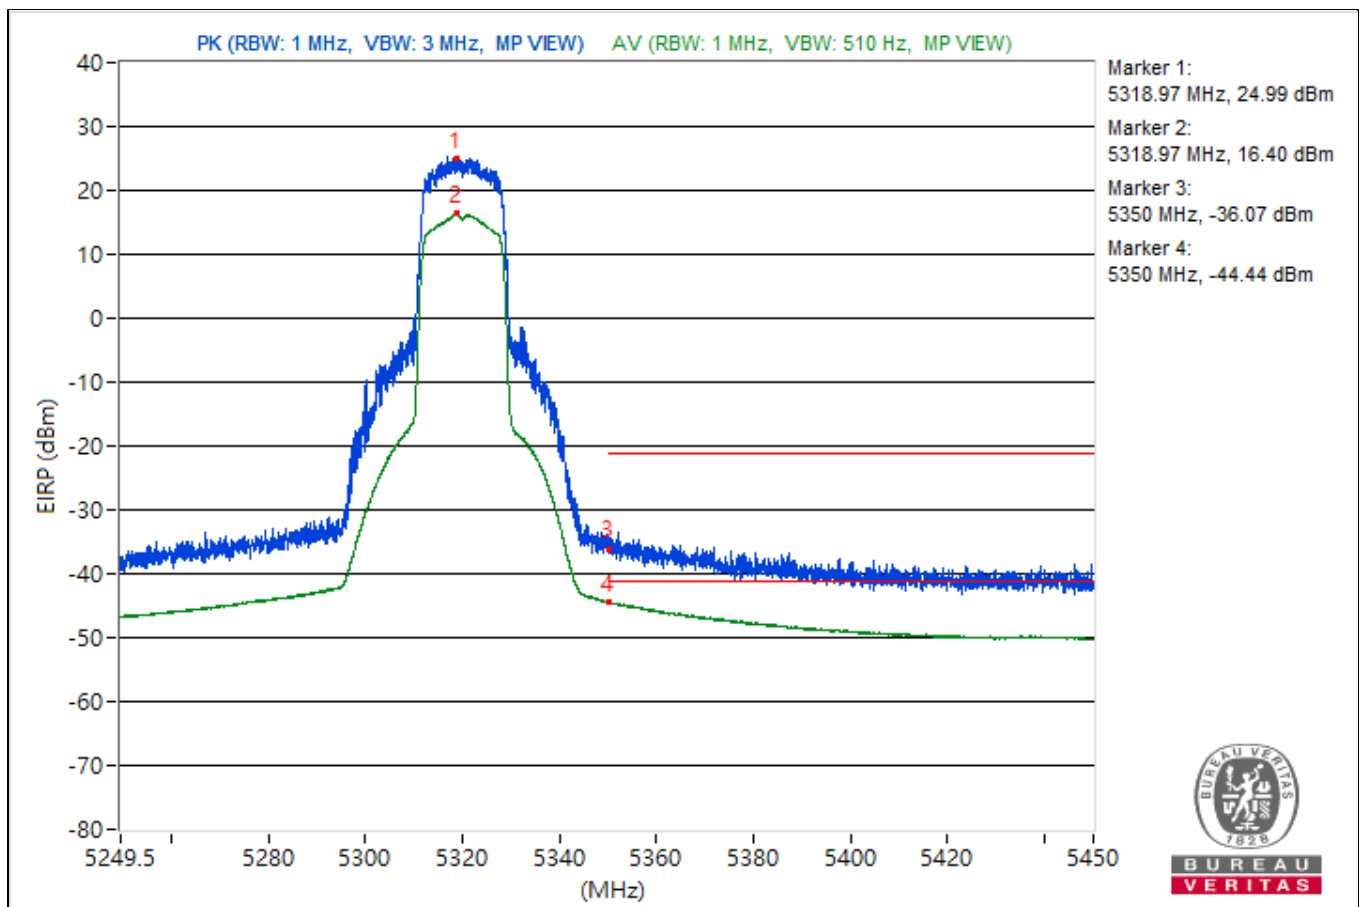


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5501.74	120.05 PK			13.24	14.38	7.93	24.79
2	*5500.94	110.55 AV			4.35	4.35	7.93	15.29
3	5456.1	60.37 PK	74	-13.63	-44.99	-46.88	7.93	-34.89
4	5459.95	49.39 AV	54	-4.61	-56.7	-56.92	7.93	-45.87
5	#5466.2	61.46 PK	68.26	-6.8	-47.34	-43.12	7.93	-33.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

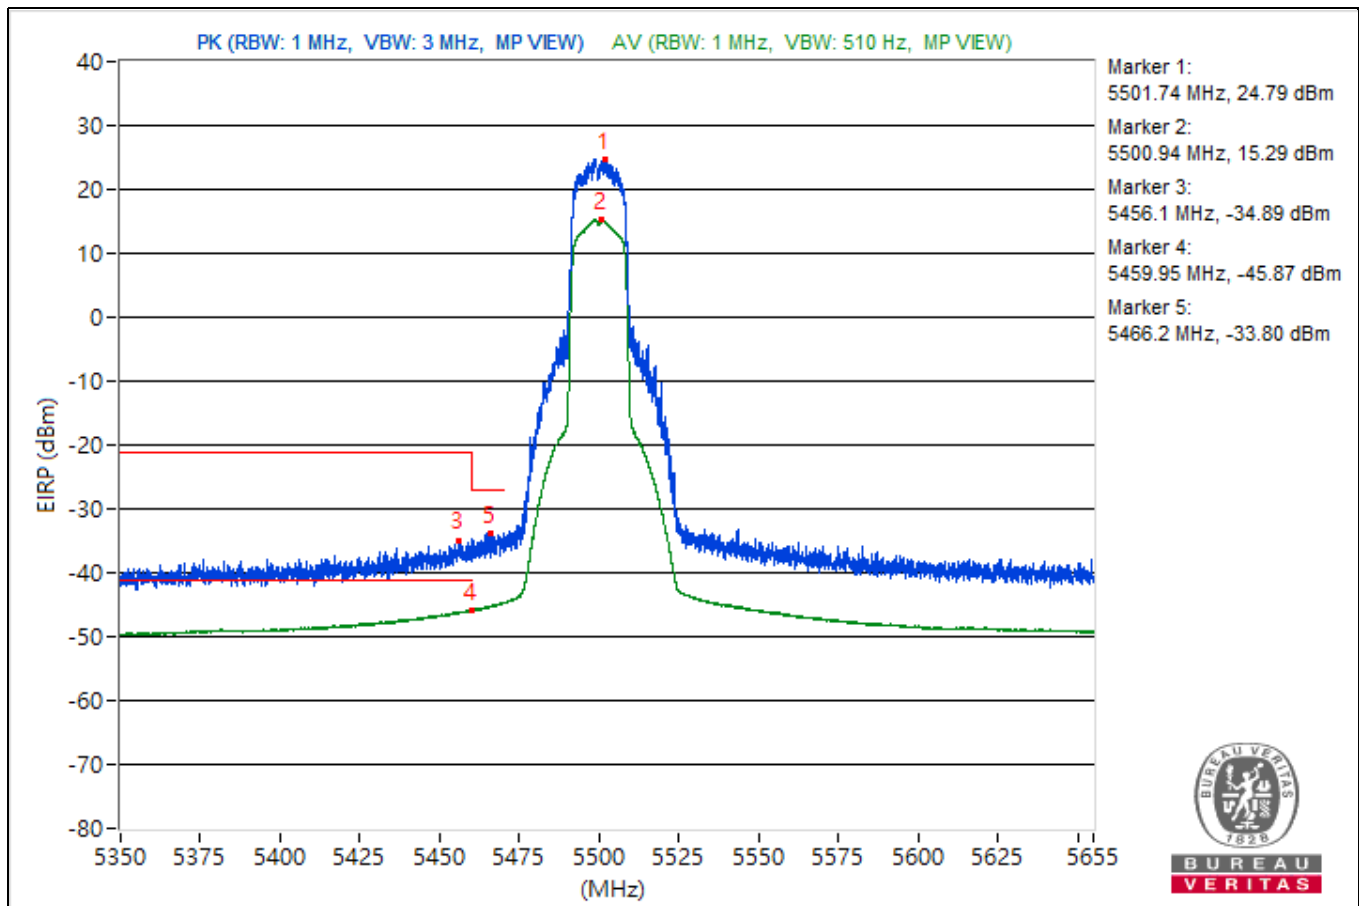


RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5578.18	120.6 PK			13.08	15.41	7.93	25.34
2	*5579.17	110.63 AV			4.53	4.33	7.93	15.37
3	5457.63	58 PK	74	-16	-47.03	-49.8	7.93	-37.26
4	5458.31	46.52 AV	54	-7.48	-59.53	-59.83	7.93	-48.74
5	#5469.33	57.37 PK	68.26	-10.89	-47.84	-50.12	7.93	-37.89

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

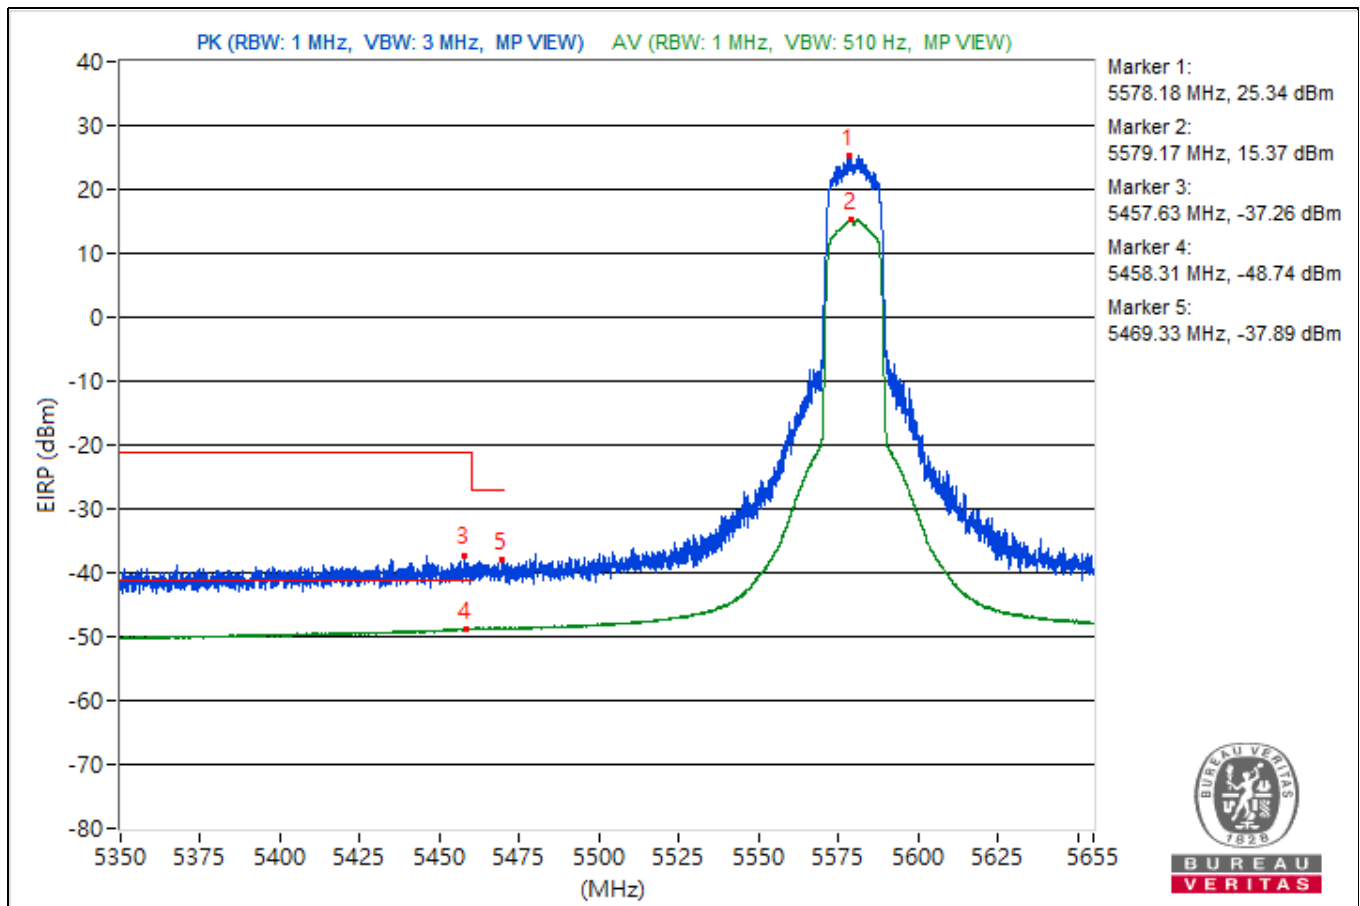


RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5701.64	120.78			15.11	13.97	7.93	25.52
2	#5735.93	65.36	68.26	-2.9	-42.35	-39.72	7.93	-29.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

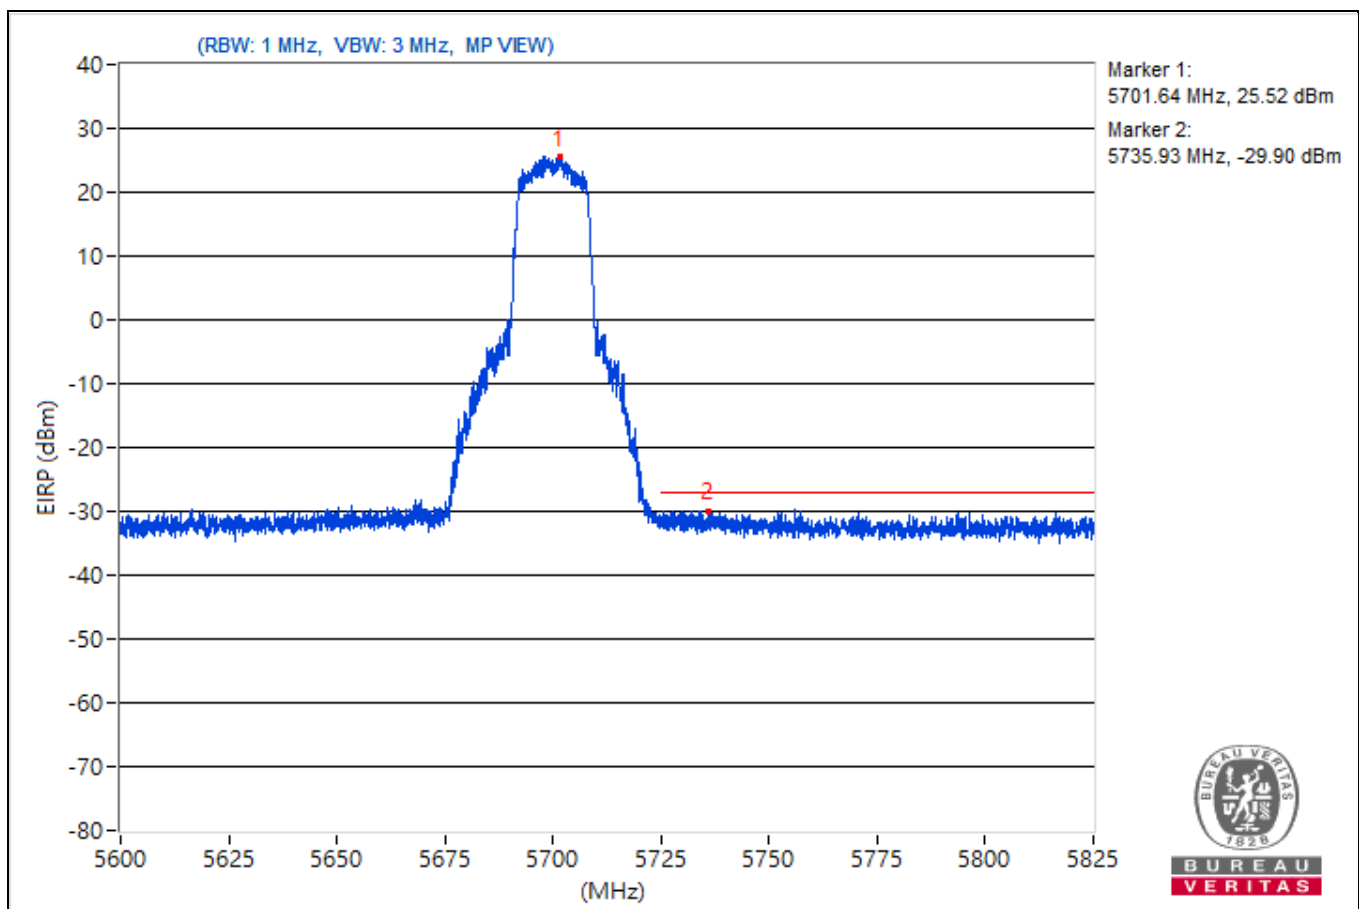


RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5717.91	120.62			13.67	15.07	7.93	25.36
2	#5854.72	65.25	68.26	-3.01	-43.06	-39.53	7.93	-30.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

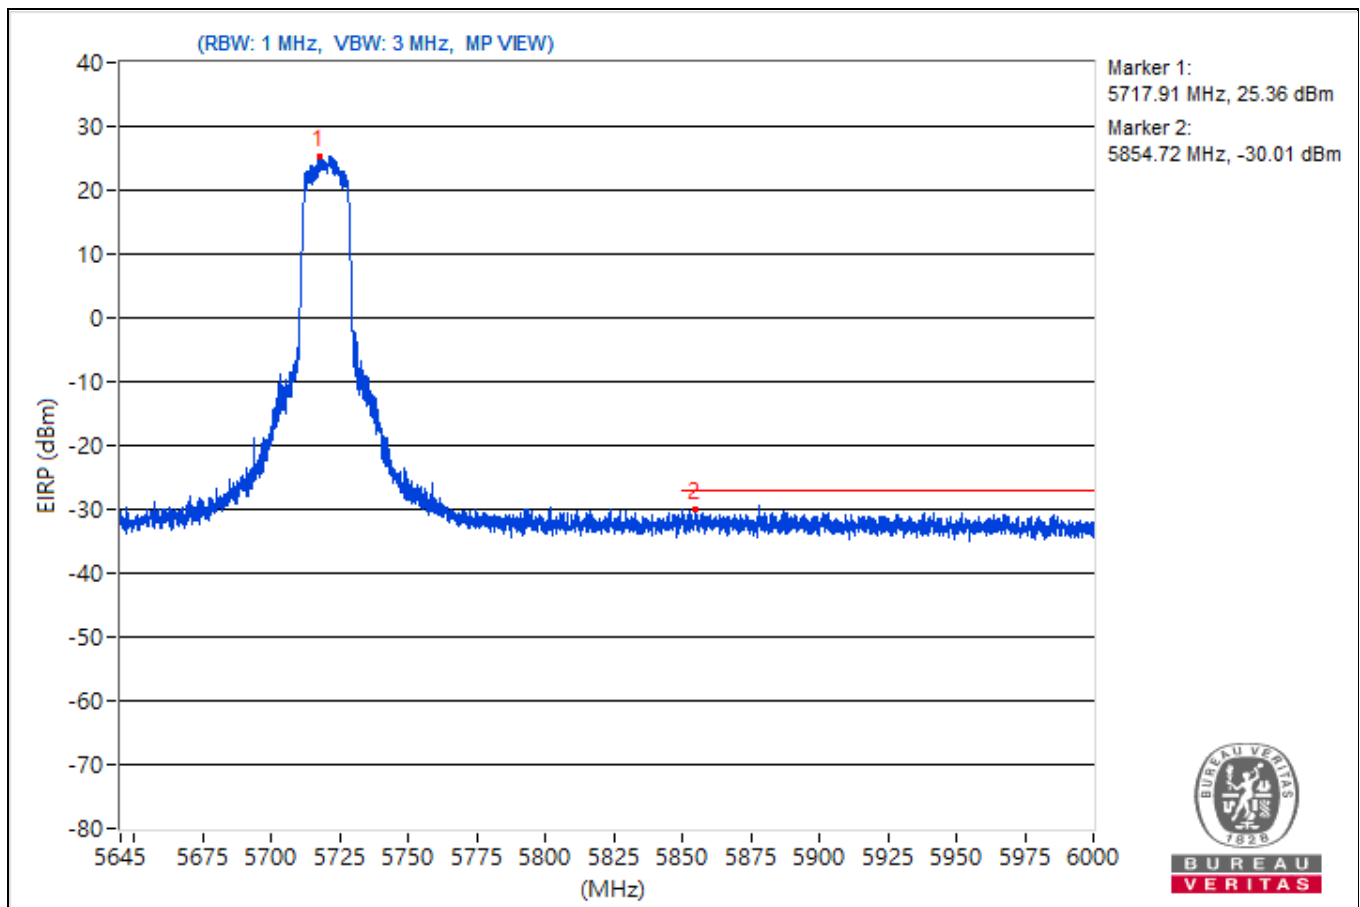


RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5746.18	124.56			17.58	19.02	7.93	29.3
2	#5645	58.91	68.26	-9.35	-46.37	-48.45	7.93	-36.35
3	#5650.34	58.56	68.51	-9.95	-48.6	-46.85	7.93	-36.7
4	#5719.69	76.18	110.77	-34.59	-32.76	-28.35	7.93	-19.08
5	#5723.97	84.04	119.91	-35.87	-21.44	-23.02	7.93	-11.22
6	#5854.24	56.68	112.6	-55.92	-50.03	-49.06	7.93	-38.58
7	#5874.31	57.07	105.45	-48.38	-48.03	-50.59	7.93	-38.19
8	#5924.18	55.94	68.87	-12.93	-49.03	-51.98	7.93	-39.32
9	#5990.32	57.45	68.26	-10.81	-47.98	-49.69	7.93	-37.81

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

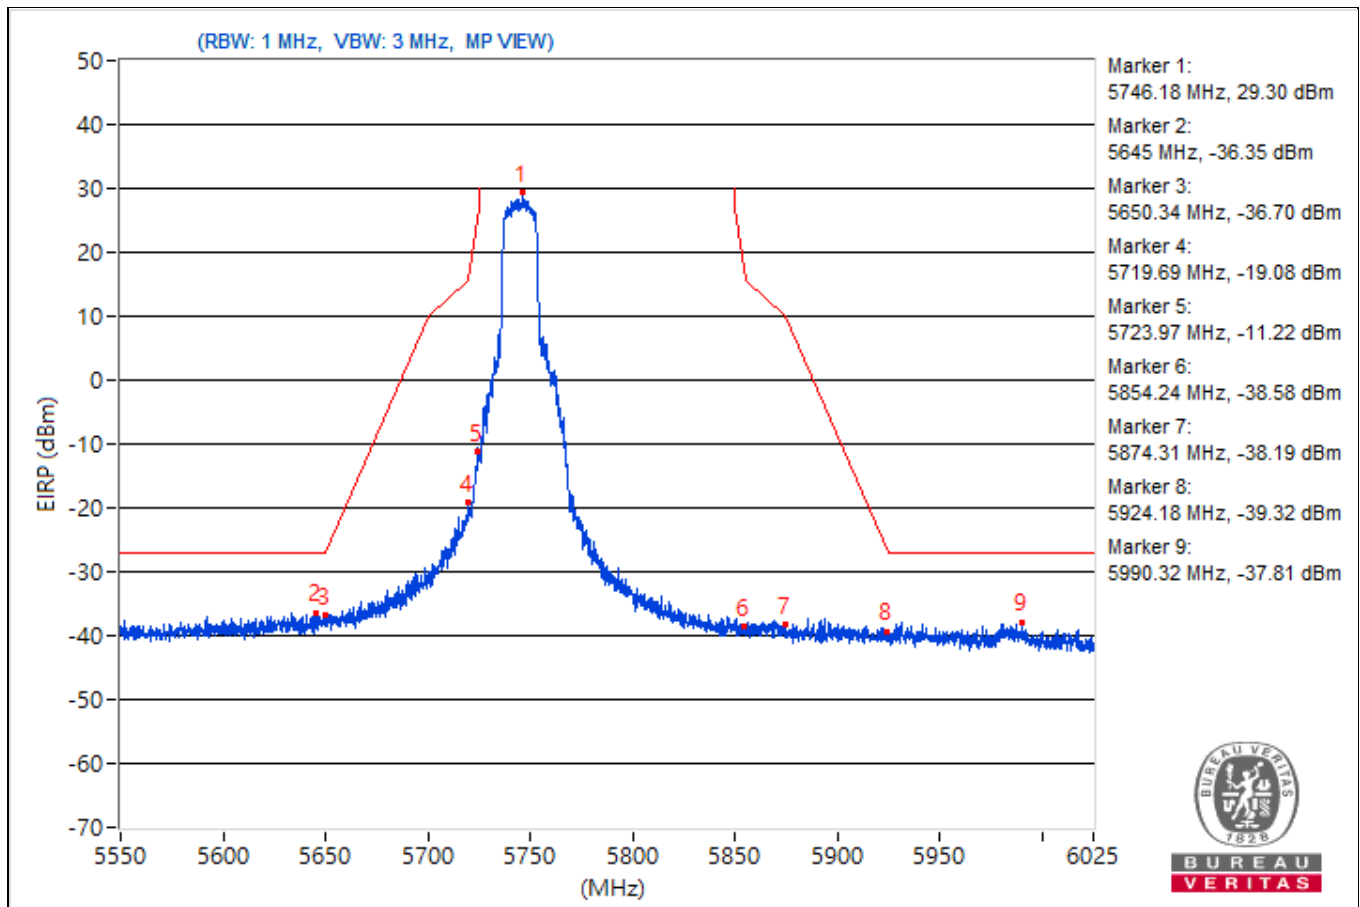


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5782.87	123.94			17.67	17.82	7.93	28.68
2	#5600.71	58.43	68.26	-9.83	-46.14	-50.42	7.93	-36.83
3	#5650.23	56.83	68.43	-11.6	-50.45	-48.5	7.93	-38.43
4	#5701.88	60.41	105.79	-45.38	-45.19	-46.47	7.93	-34.85
5	#5720.05	62.34	110.97	-48.63	-44.5	-43.31	7.93	-32.92
6	#5853.64	61.48	113.95	-52.47	-43.63	-46.18	7.93	-33.78
7	#5873.59	58.95	105.65	-46.7	-48.95	-46.03	7.93	-36.31
8	#5922.28	57.82	70.27	-12.45	-48.13	-48.64	7.93	-37.44
9	#5930.71	57.28	68.26	-10.98	-47.36	-51.4	7.93	-37.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

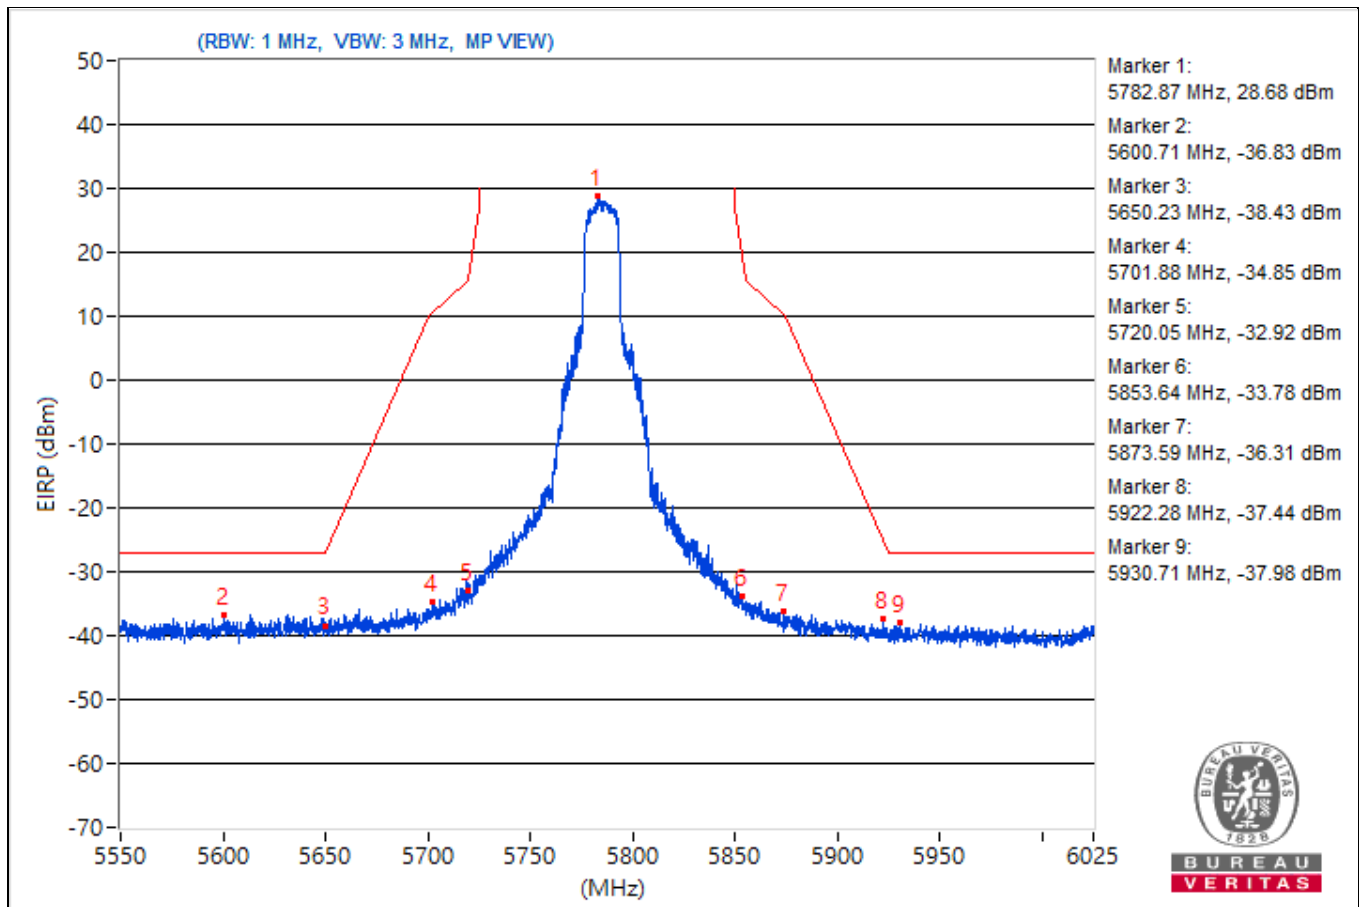


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5826.33	123.49			17.88	16.6	7.93	28.23
2	#5583.96	57.11	68.26	-11.15	-50.56	-48	7.93	-38.15
3	#5650.82	56.05	68.87	-12.82	-50.8	-49.59	7.93	-39.21
4	#5700.93	57.2	105.52	-48.32	-49.69	-48.41	7.93	-38.06
5	#5720.17	56.41	111.24	-54.83	-49.26	-50.39	7.93	-38.85
6	#5852.57	75.29	116.39	-41.1	-34.82	-28.89	7.93	-19.97
7	#5856.49	75.16	110.44	-35.28	-28.39	-39.01	7.93	-20.1
8	#5924.42	56.31	68.69	-12.38	-50.89	-49.08	7.93	-38.95
9	#5939.38	57.17	68.26	-11.09	-50.64	-47.85	7.93	-38.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

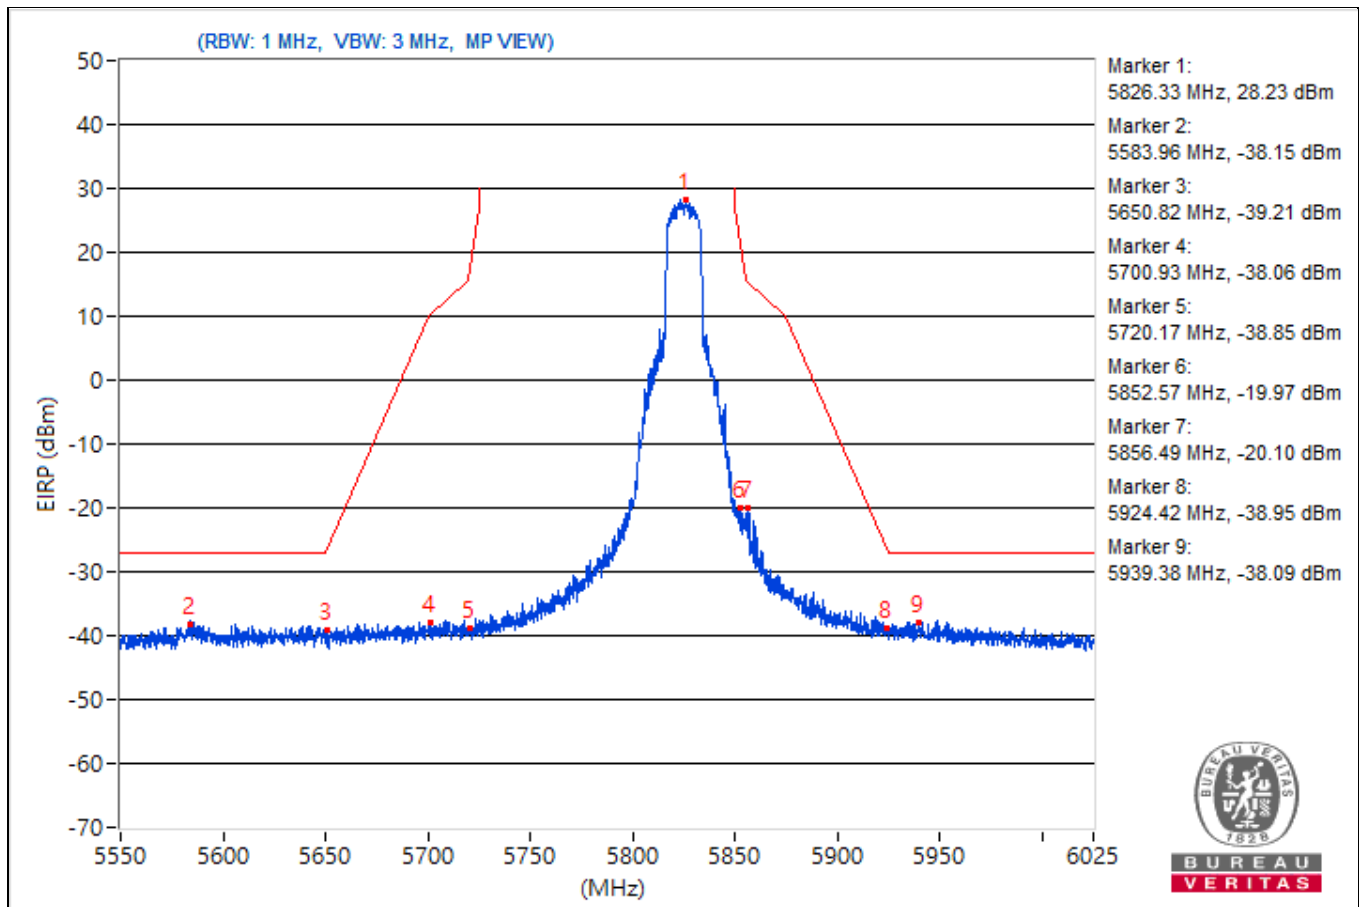


RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5178.96	118.91 PK			14.17	16.86	4.92	23.65
2	*5178.96	110.1 AV			7.1	6.7	4.92	14.84
3	5149.64	68.04 PK	74	-5.96	-37.25	-33.74	4.92	-27.22
4	5149.64	53.79 AV	54	-0.21	-49.28	-49.53	4.92	-41.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

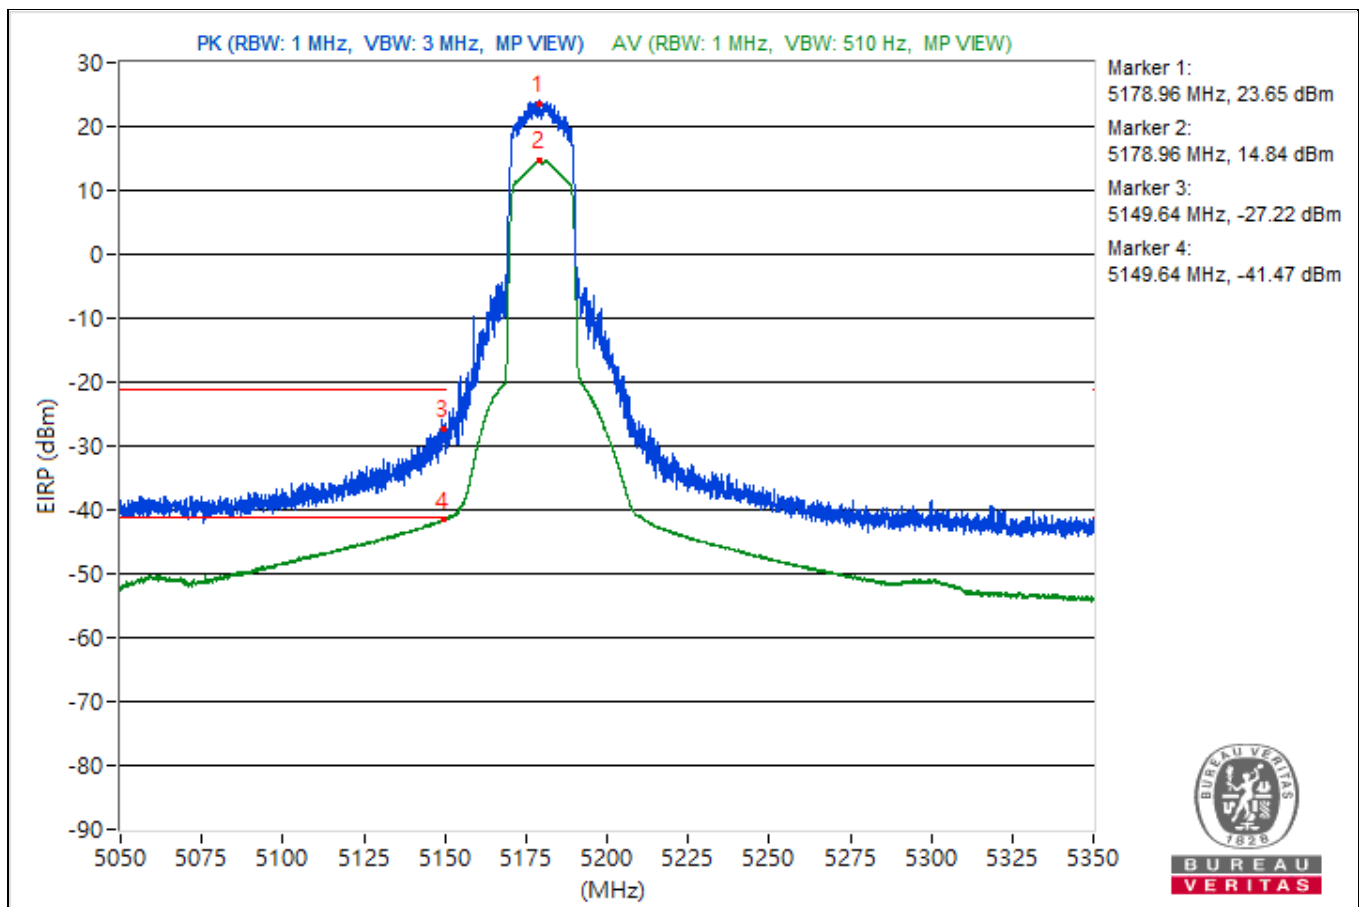


RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5198.84	118.1 PK			15.14	14.67	4.92	22.84
2	*5198.84	110.28 AV			7.16	7.02	4.92	15.02
3	5149.71	63.83 PK	74	-10.17	-39.73	-39.02	4.92	-31.43
4	5149.71	52.73 AV	54	-1.27	-50.55	-50.37	4.92	-42.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

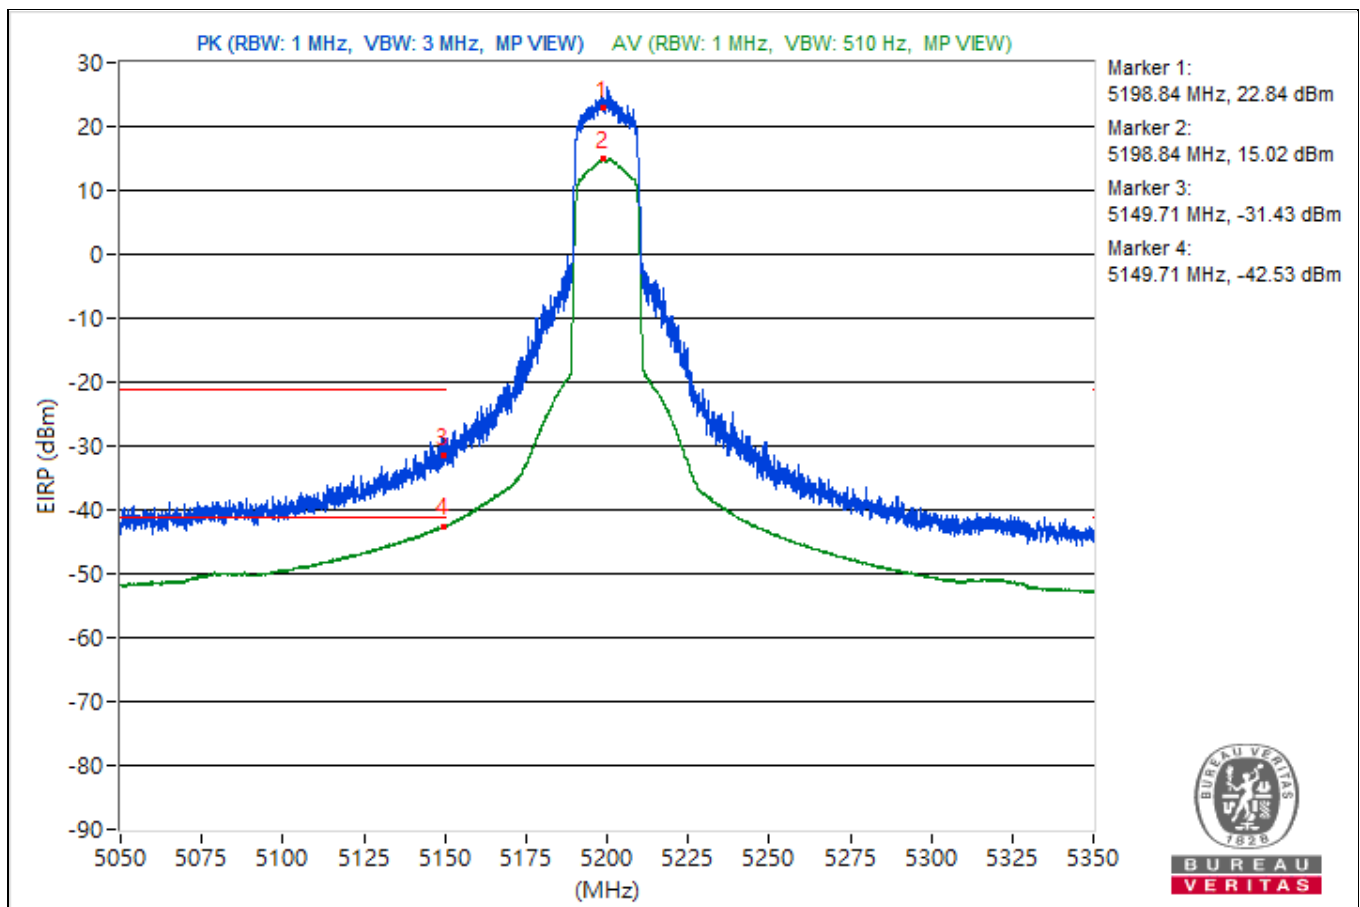


RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5240.95	118.98 PK			15.5	16.05	4.92	23.72
2	*5240.95	110.11 AV			7.02	6.81	4.92	14.85
3	5149	55.5 PK	74	-18.5	-49.01	-46.68	4.92	-39.76
4	5149	45.47 AV	54	-8.53	-57.69	-57.75	4.92	-49.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

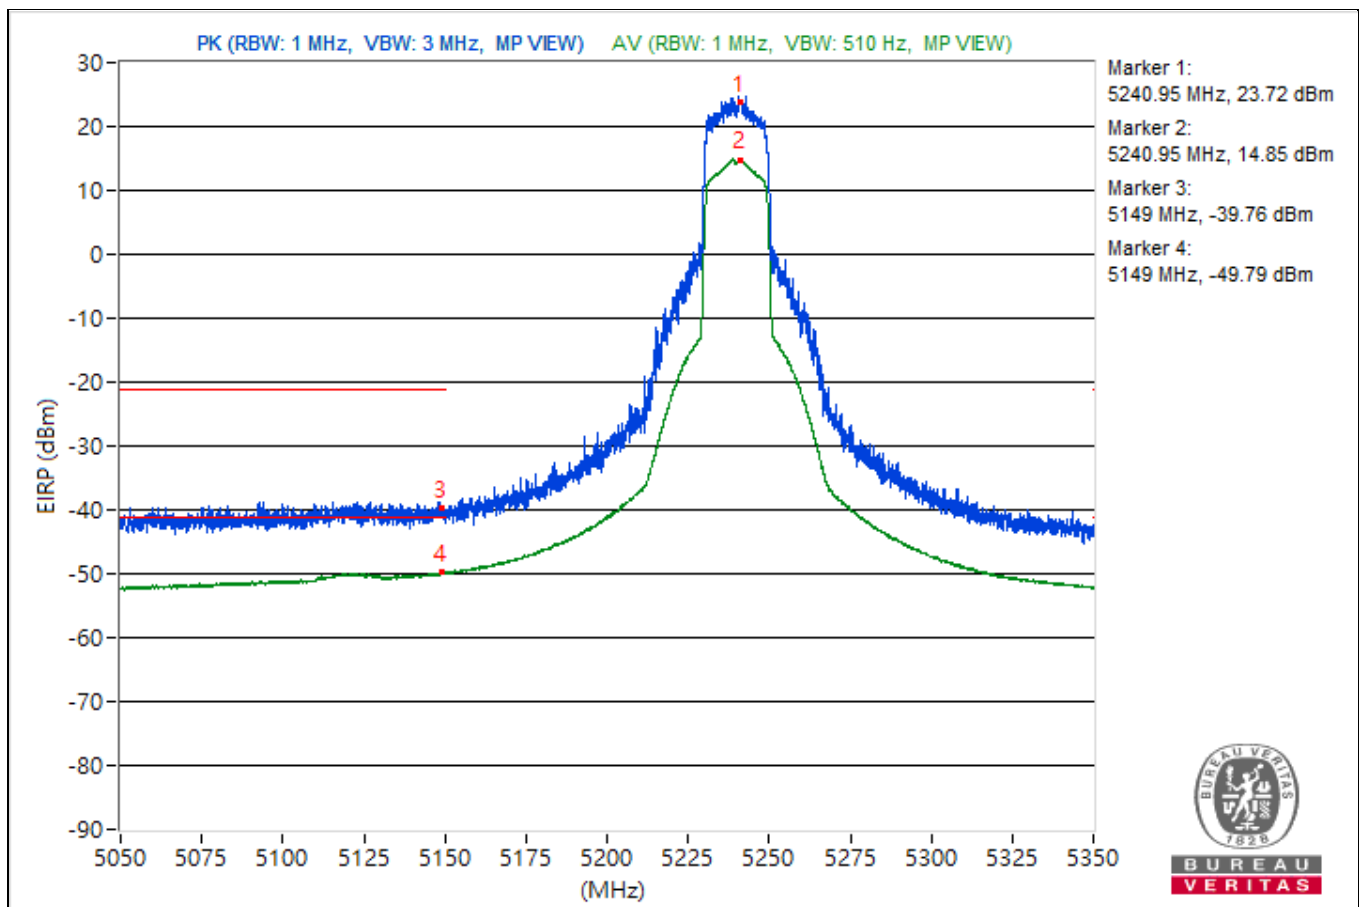


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5258.8	117.22 PK			14.17	13.87	4.92	21.96
2	*5258.8	109.44 AV			6.56	5.91	4.92	14.18
3	5350.8	52.67 PK	74	-21.33	-50.43	-50.62	4.92	-42.59
4	5350.8	44.18 AV	54	-9.82	-58.57	-59.51	4.92	-51.08

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

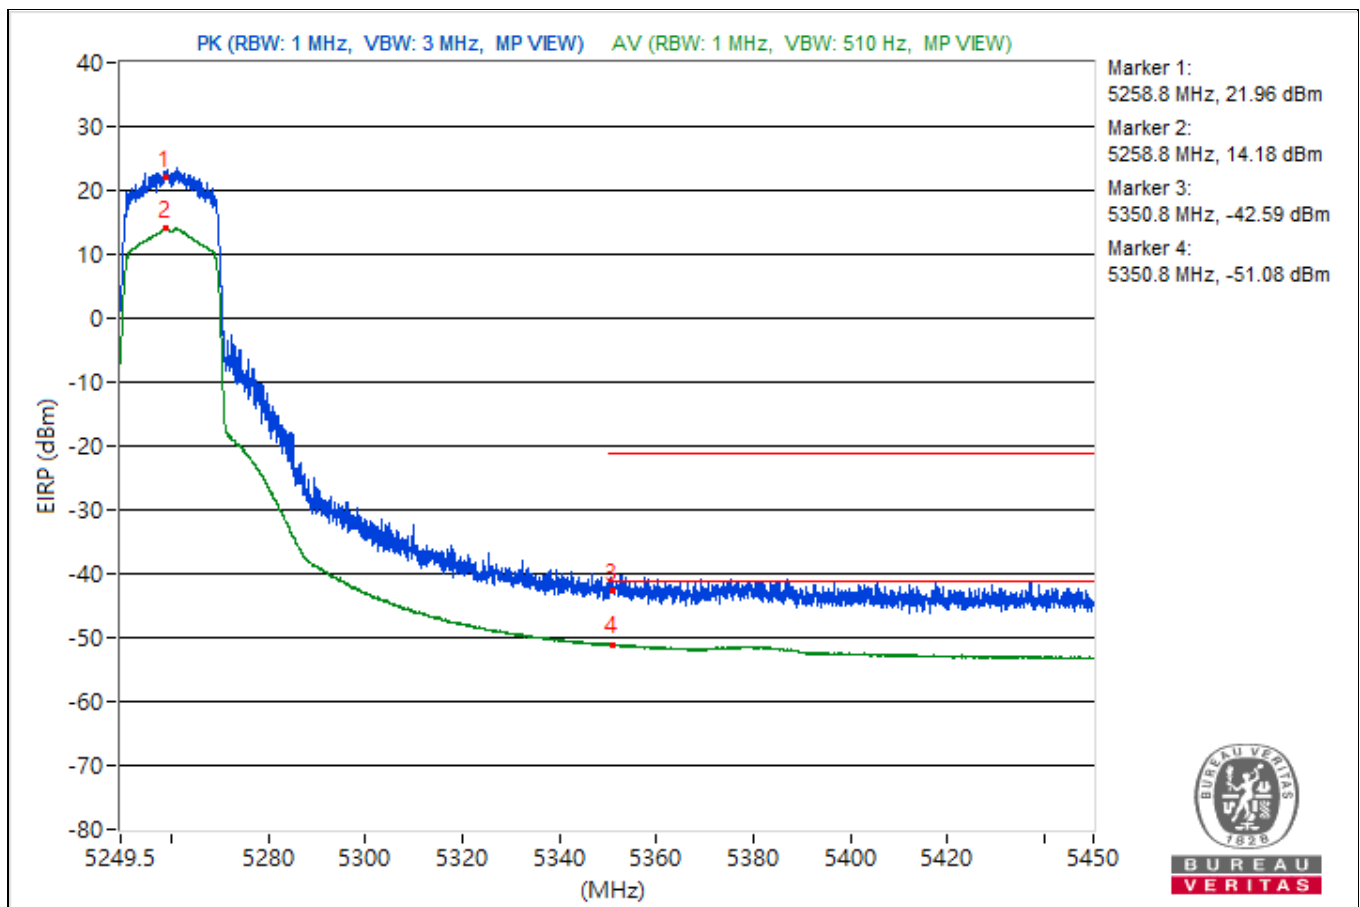


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5298.9	118.31 PK			14.18	15.89	4.92	23.05
2	*5298.9	109.62 AV			6.5	6.35	4.92	14.36
3	5350.2	57.73 PK	74	-16.27	-45.1	-45.86	4.92	-37.53
4	5350.2	49.7 AV	54	-4.3	-53.48	-53.49	4.92	-45.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

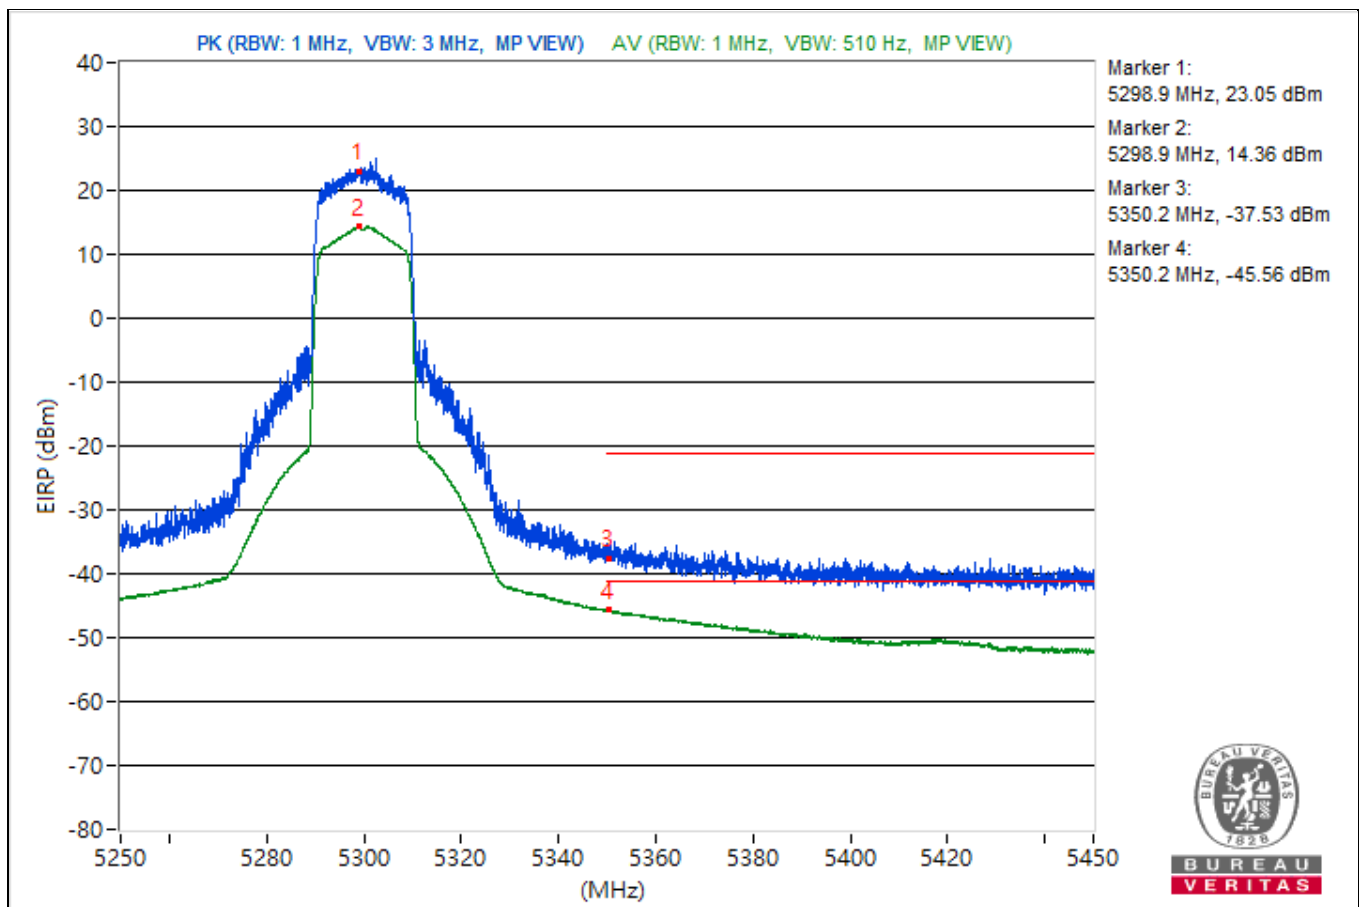


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5320.75	118.34 PK			14.48	15.72	4.92	23.08
2	*5320.75	109.21 AV			6.1	5.94	4.92	13.95
3	5350.08	57.6 PK	74	-16.4	-44.68	-46.74	4.92	-37.66
4	5350.08	48.94 AV	54	-5.06	-53.71	-54.86	4.92	-46.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

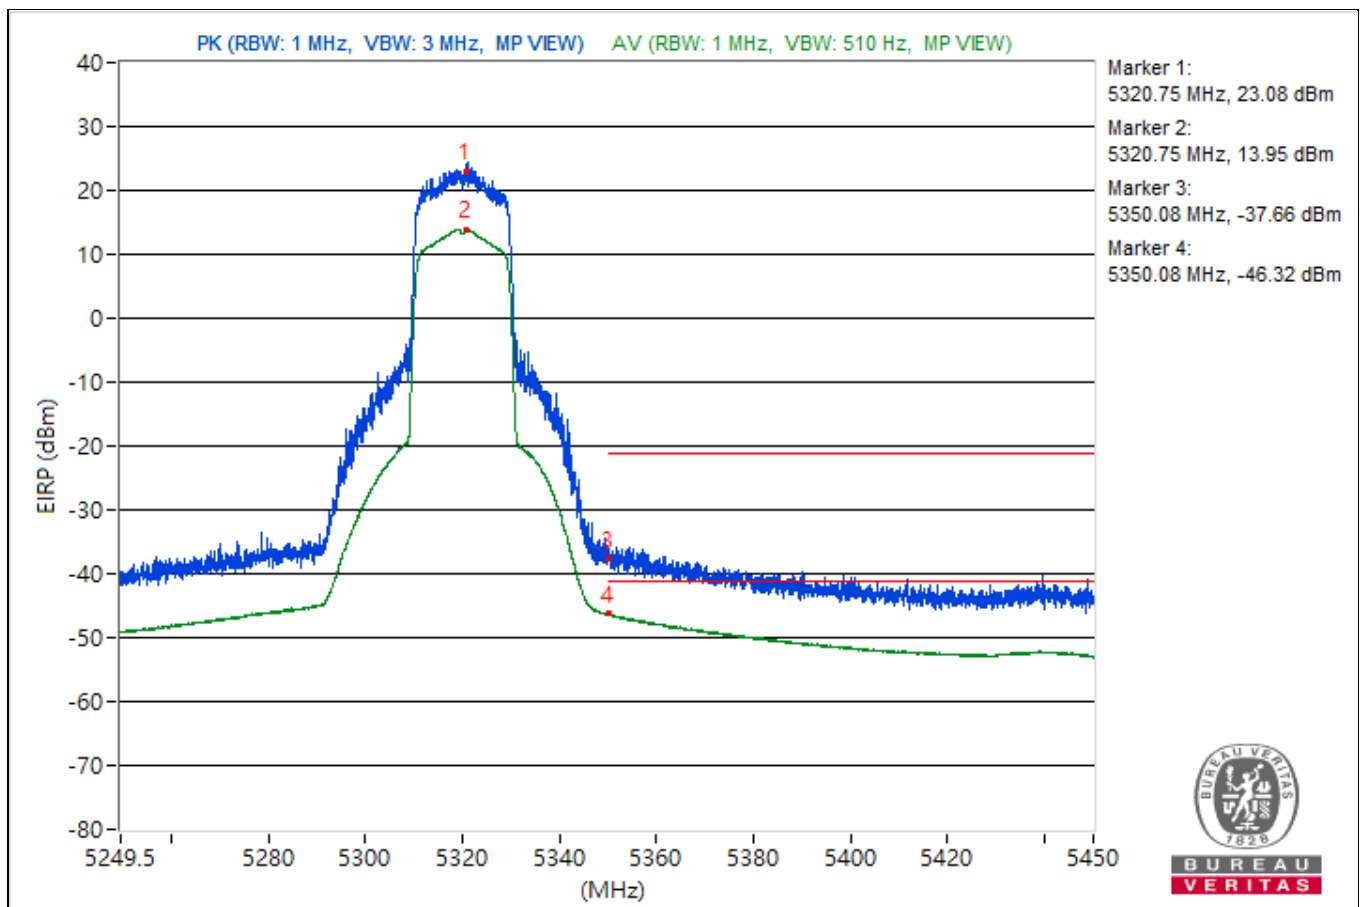


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5497.89	118.51 PK			14.66	15.89	4.92	23.25
2	*5501.01	108.61 AV			5.37	5.47	4.92	13.35
3	5452.75	58.4 PK	74	-15.6	-44.12	-45.59	4.92	-36.86
4	5459.76	48.06 AV	54	-5.94	-55.49	-54.8	4.92	-47.2
5	#5460.45	60 PK	68.26	-8.26	-41.48	-46.05	4.92	-35.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

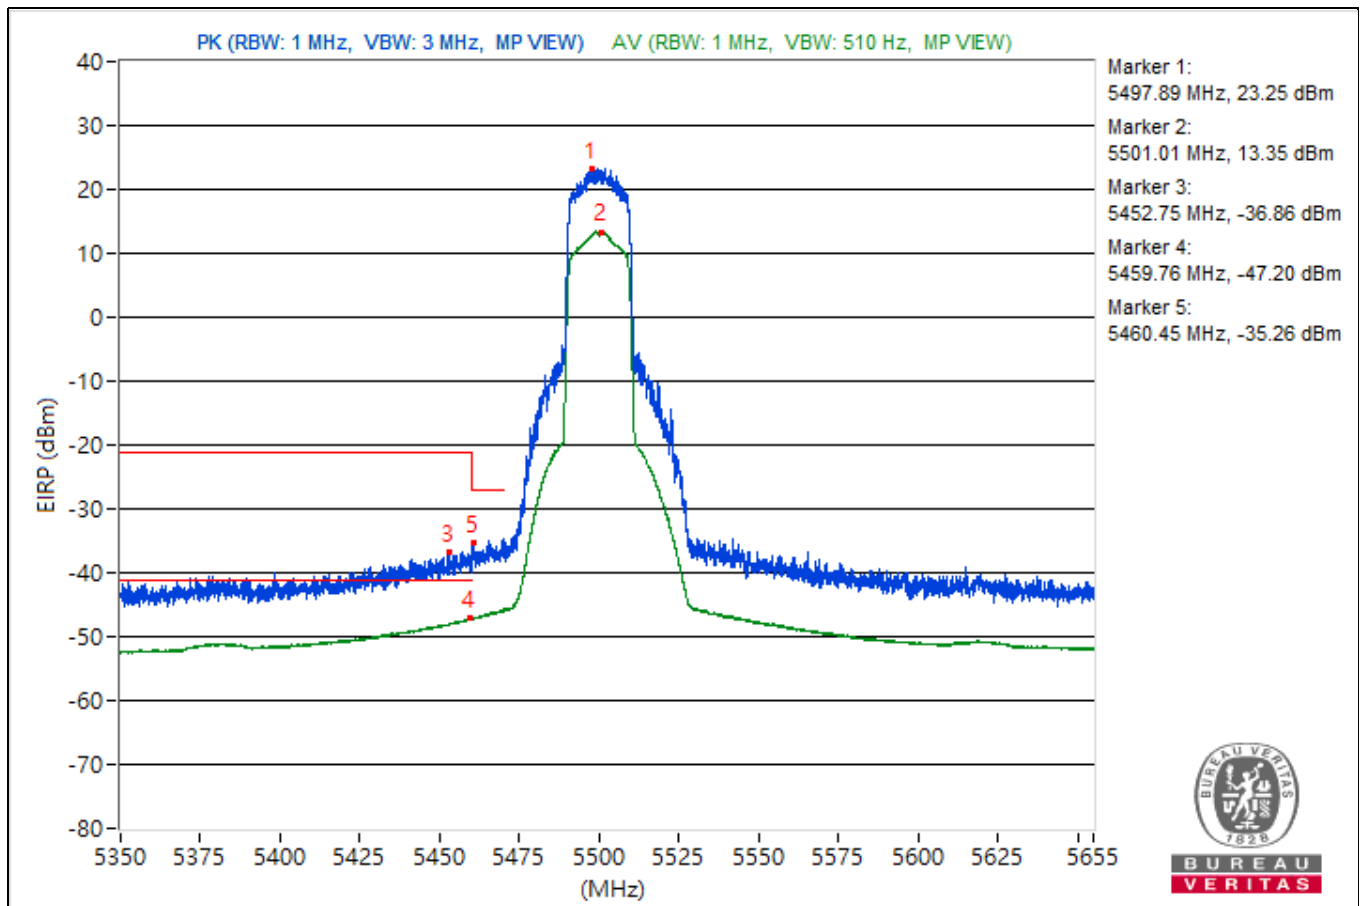


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5582.37	119.14 PK			17.13	14.32	4.92	23.88
2	*5579.02	109.33 AV			6.32	5.96	4.92	14.07
3	5441	55.09 PK	74	-18.91	-46.69	-50.22	4.92	-40.17
4	5459.08	44.67 AV	54	-9.33	-57.99	-59.12	4.92	-50.59
5	#5463.42	55.56 PK	68.26	-12.7	-46.92	-48.48	4.92	-39.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

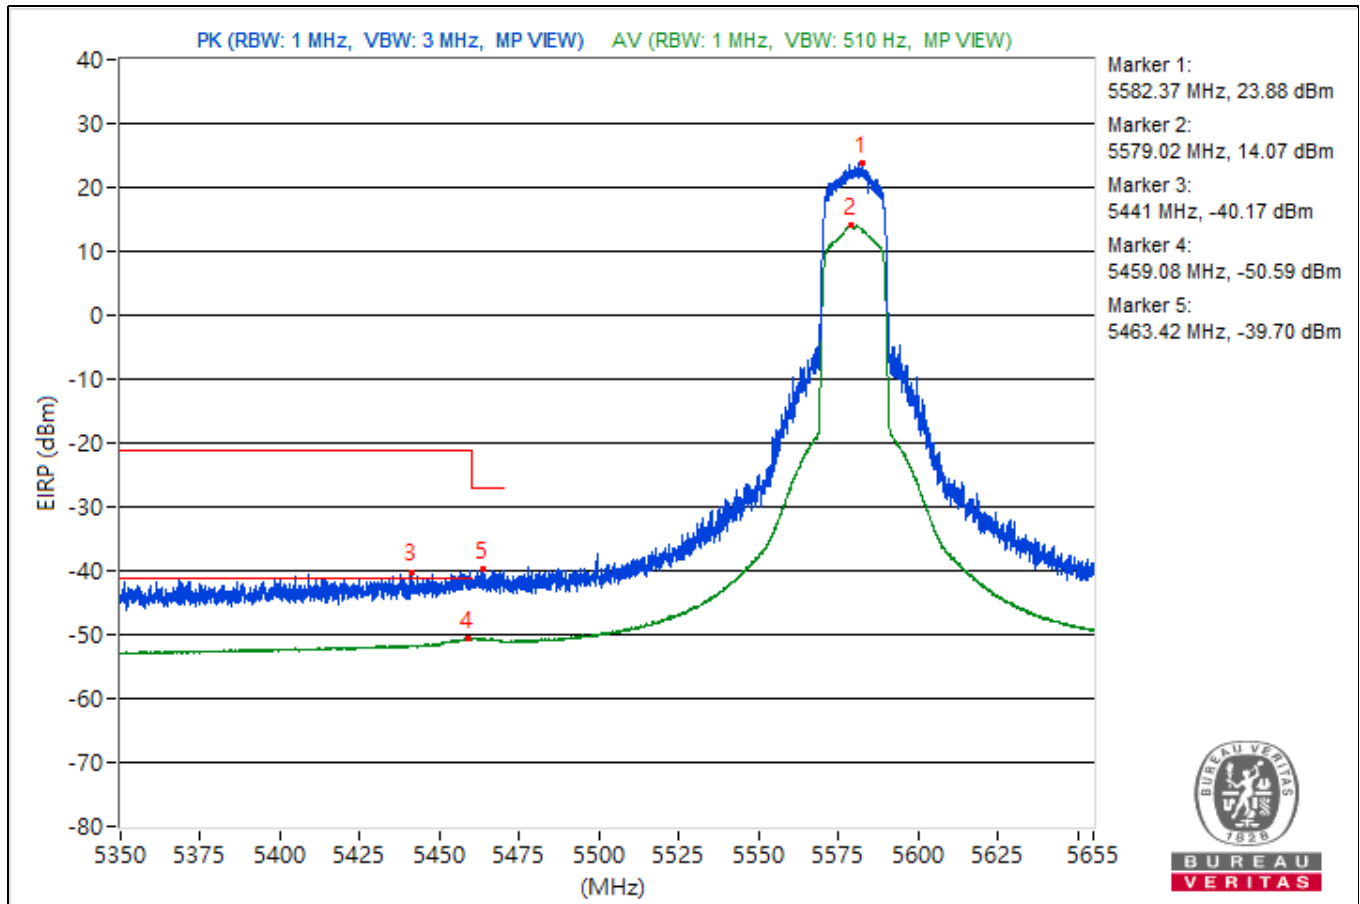


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5700.49	120.64			19.48	13.52	4.92	25.38
2	#5725.47	63.81	68.26	-4.45	-38.06	-41.31	4.92	-31.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

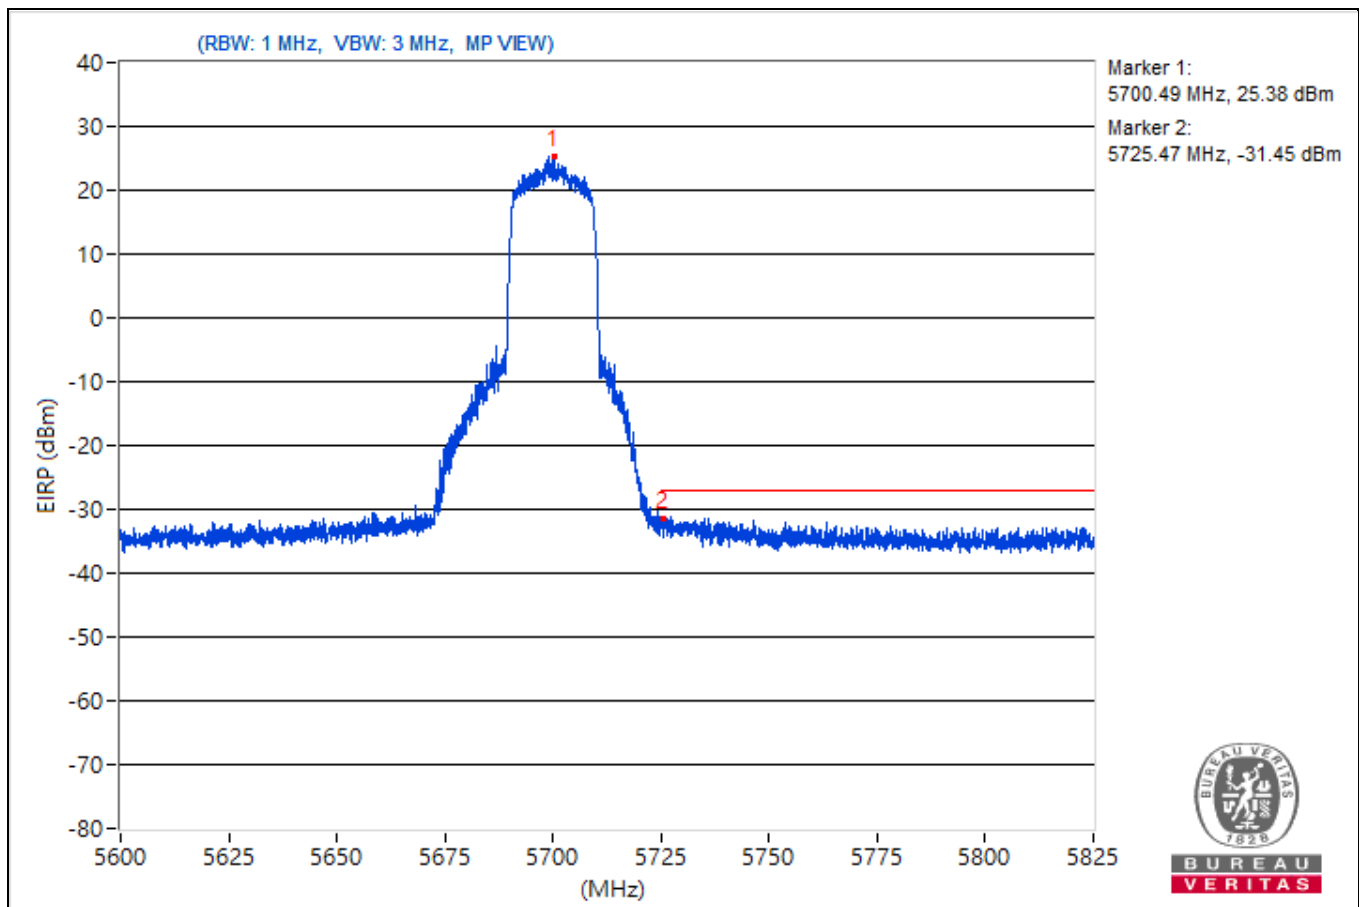


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5722.03	120.65			18.2	16.55	4.92	25.39
2	#5881.74	62.58	68.26	-5.68	-39.38	-42.34	4.92	-32.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

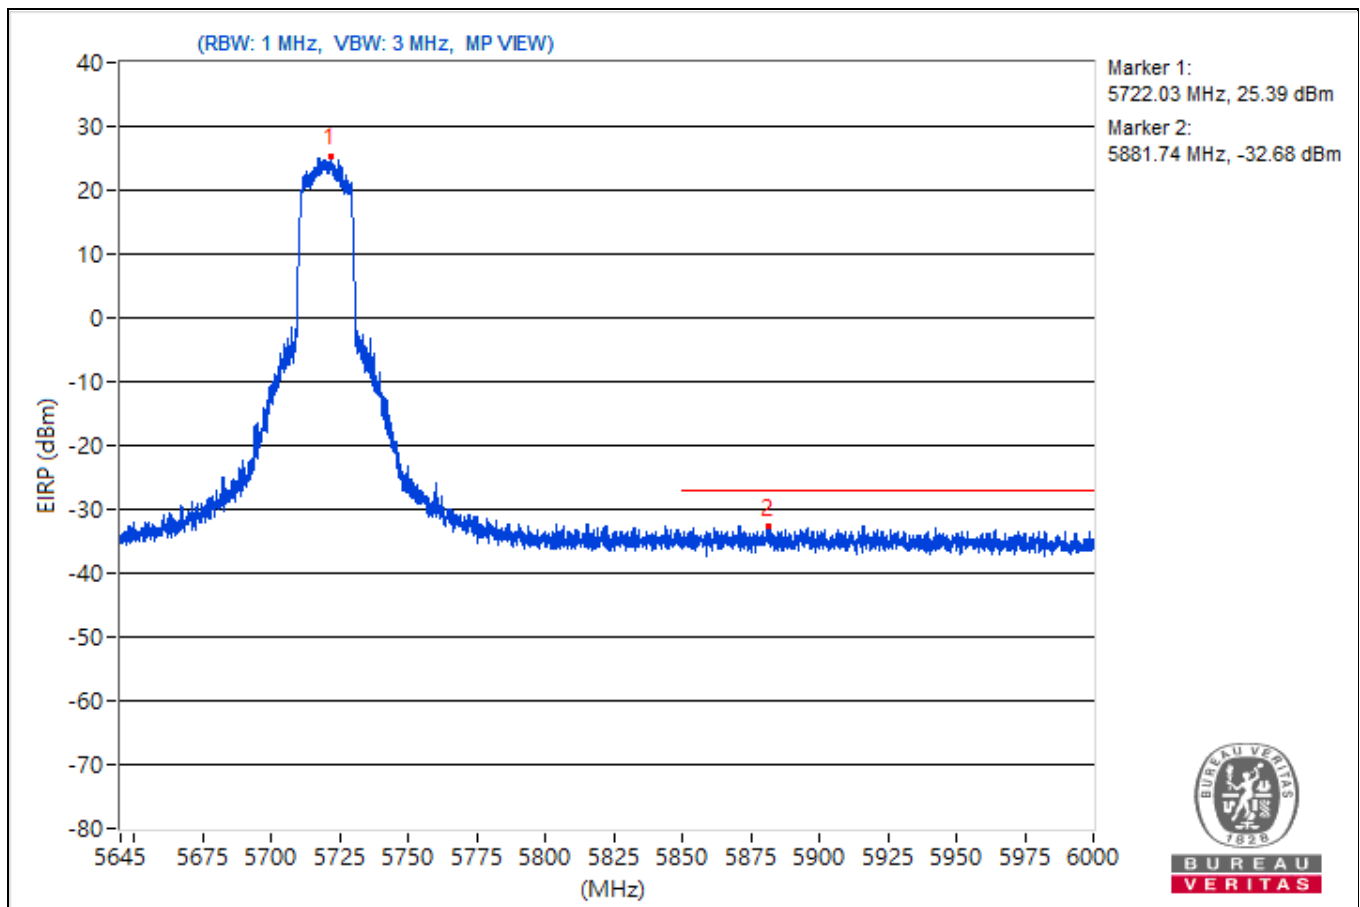


RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5743.92	121.62			19.58	16.85	4.92	26.36
2	#5624.69	56.91	68.26	-11.35	-46.93	-45.72	4.92	-38.35
3	#5652.6	56.27	70.18	-13.91	-48.18	-45.94	4.92	-38.99
4	#5719.34	79.43	110.67	-31.24	-27.87	-21.69	4.92	-15.83
5	#5722.19	82.37	115.85	-33.48	-23.72	-19.1	4.92	-12.89
6	#5854.48	53.5	112.06	-58.56	-50.1	-49.32	4.92	-41.76
7	#5872.76	55.88	105.89	-50.01	-49.87	-45.7	4.92	-39.38
8	#5924.3	52.86	68.78	-15.92	-50.9	-49.83	4.92	-42.4
9	#5936.06	55.46	68.26	-12.8	-46.15	-50.25	4.92	-39.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

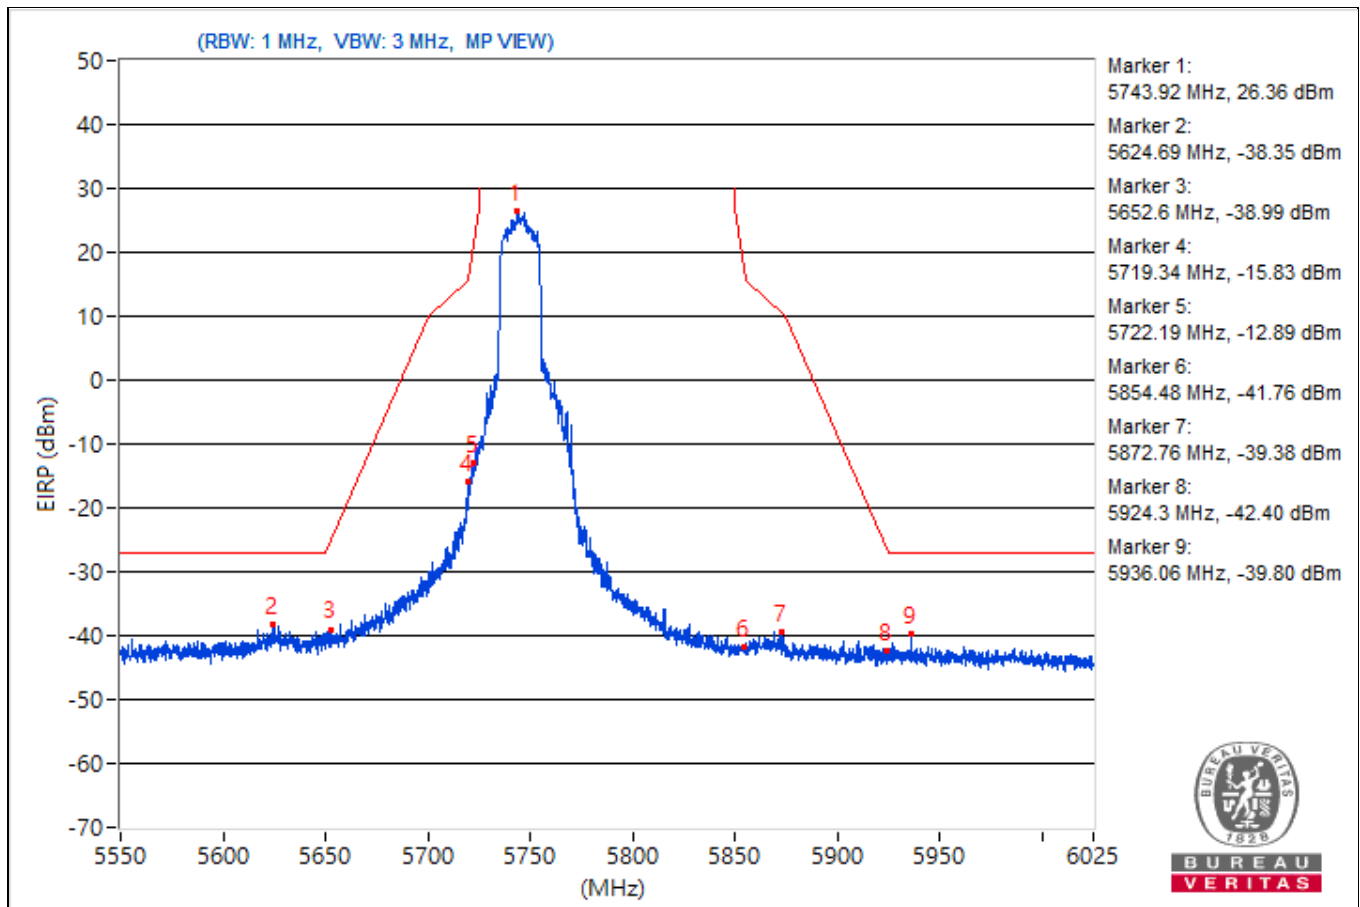


RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5784.53	121.04			17.81	17.89	4.92	25.78
2	#5626.83	55.8	68.26	-12.46	-46.36	-48.74	4.92	-39.46
3	#5650.58	54.42	68.69	-14.27	-48.93	-48.61	4.92	-40.84
4	#5709.84	58.79	108.01	-49.22	-45.86	-43.31	4.92	-36.47
5	#5720.76	60	112.6	-52.6	-41.75	-45.36	4.92	-35.26
6	#5854.83	57.78	111.24	-53.46	-44.07	-47.34	4.92	-37.48
7	#5859.7	58	109.54	-51.54	-45.76	-44.68	4.92	-37.26
8	#5924.42	54.16	68.69	-14.53	-49.02	-49.05	4.92	-41.1
9	#5958.98	53.87	68.26	-14.39	-50.53	-48.37	4.92	-41.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

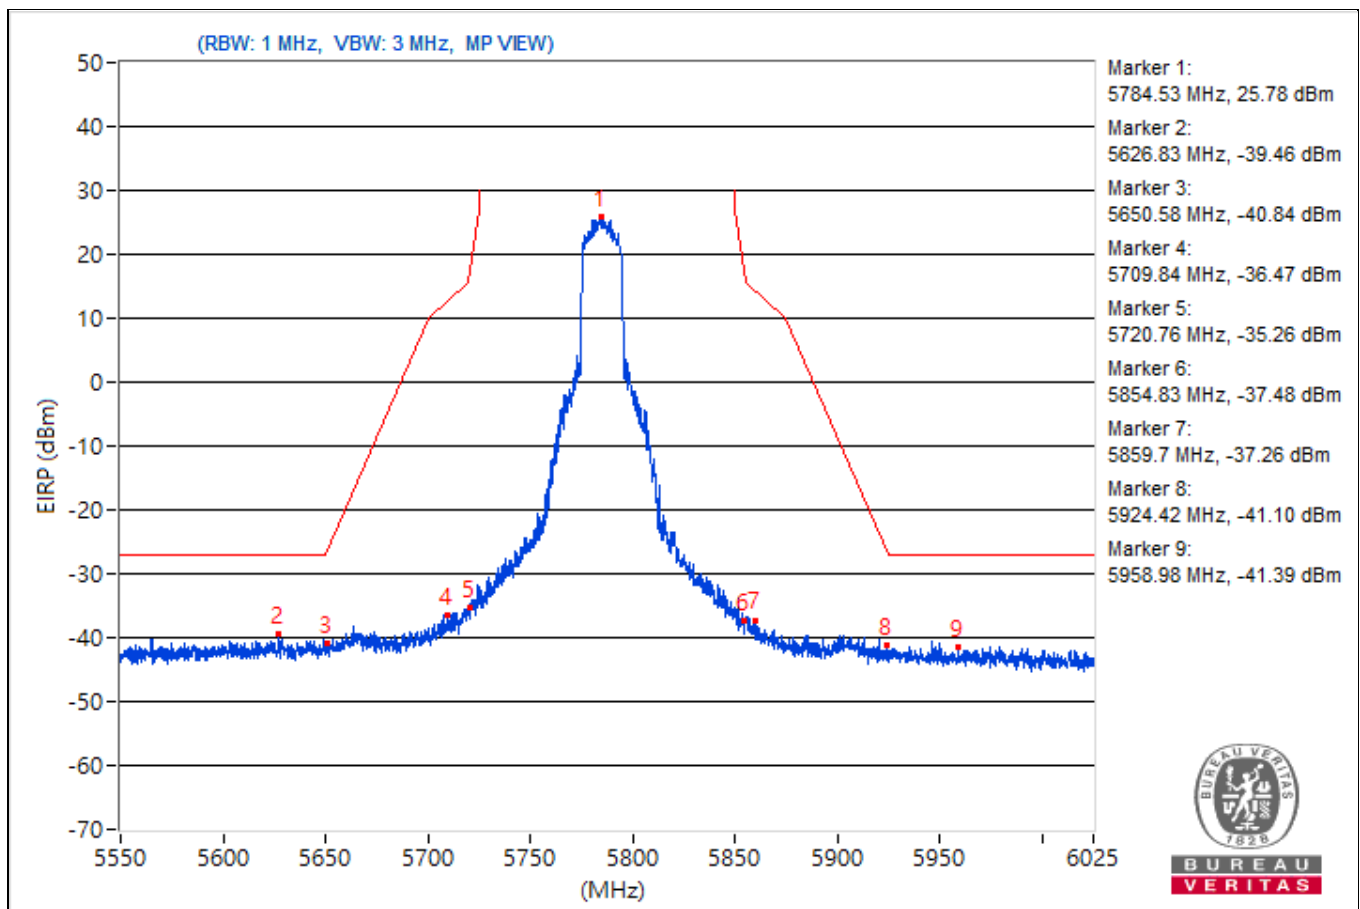


RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5826.69	122.03			17.07	20.09	4.92	26.77
2	#5646.9	54.73	68.26	-13.53	-47.5	-49.7	4.92	-40.53
3	#5650.11	53.19	68.34	-15.15	-50.26	-49.76	4.92	-42.07
4	#5701.17	56.02	105.59	-49.57	-47.9	-46.55	4.92	-39.24
5	#5720.05	54.98	110.97	-55.99	-47.11	-49.67	4.92	-40.28
6	#5854.24	72.89	112.6	-39.71	-33.41	-28.51	4.92	-22.37
7	#5856.37	73.04	110.47	-37.43	-33.57	-28.26	4.92	-22.22
8	#5922.4	55.38	70.18	-14.8	-46.24	-50.31	4.92	-39.88
9	#5942.35	56.32	68.26	-11.94	-47.42	-46.39	4.92	-38.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

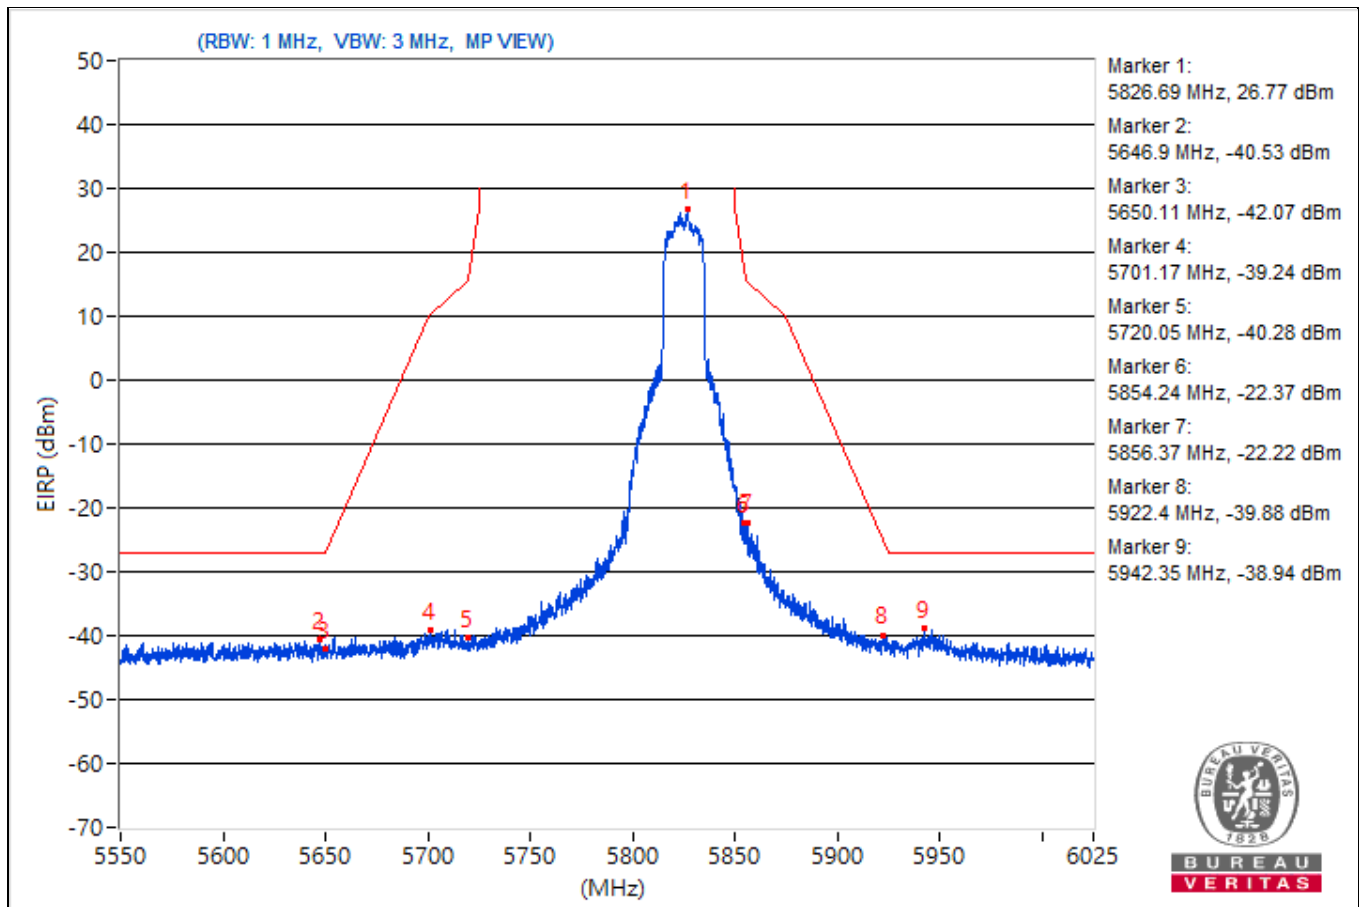


RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5191.34	115.31 PK			13.39	10.32	4.92	20.05
2	*5191.34	106.34 AV			3.27	3.03	4.92	11.08
3	5149.64	62.13 PK	74	-11.87	-39.72	-43	4.92	-33.13
4	5149.64	53.75 AV	54	-0.25	-48.61	-50.45	4.92	-41.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

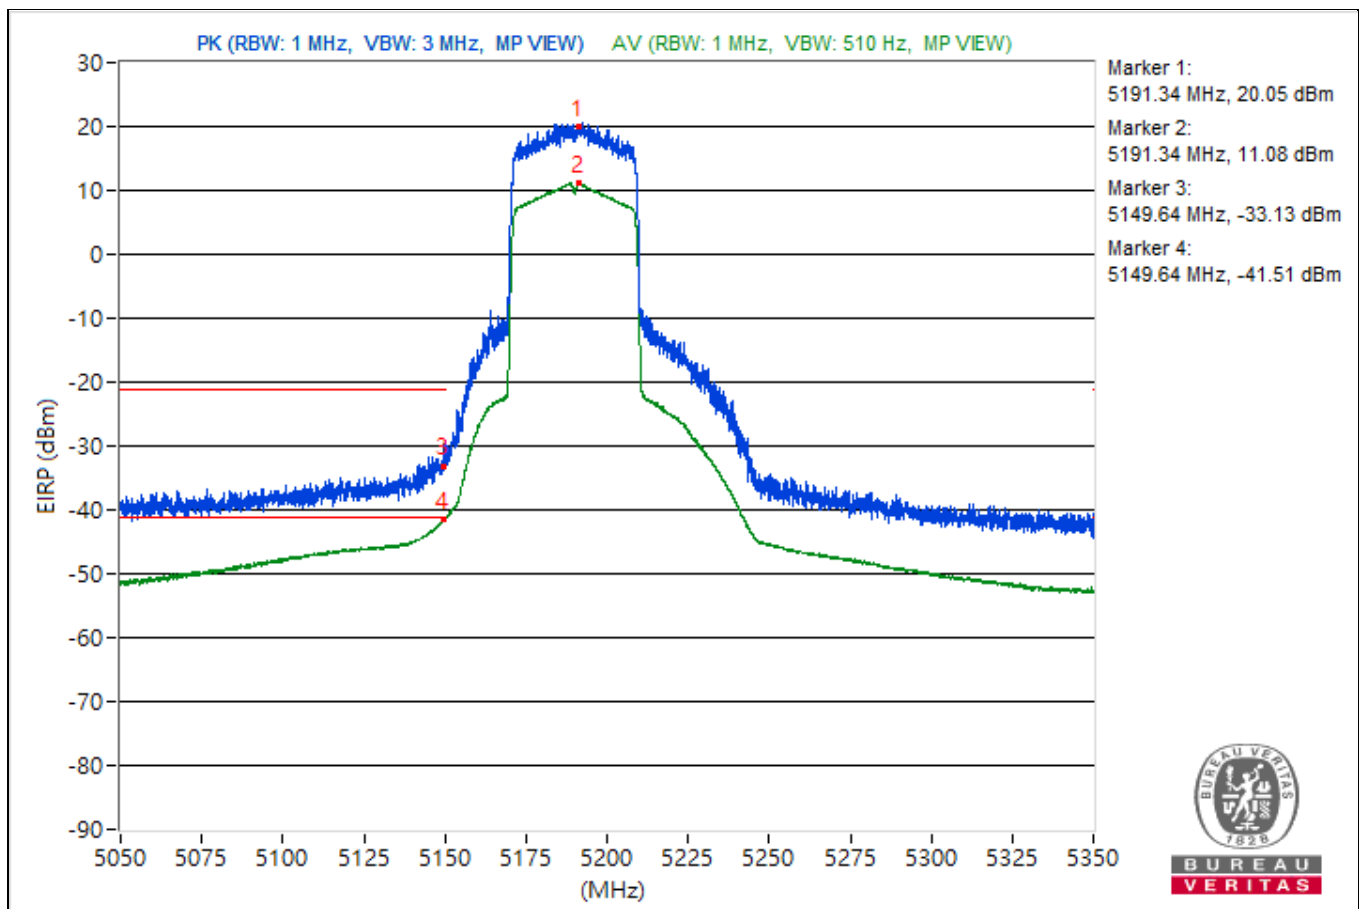


RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5228.47	116.32 PK			14.01	12.02	4.92	21.06
2	*5228.47	108.25 AV			5.67	4.34	4.92	12.99
3	5149.67	63.4 PK	74	-10.6	-40.43	-39.23	4.92	-31.86
4	5149.67	53.9 AV	54	-0.1	-48.85	-49.77	4.92	-41.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

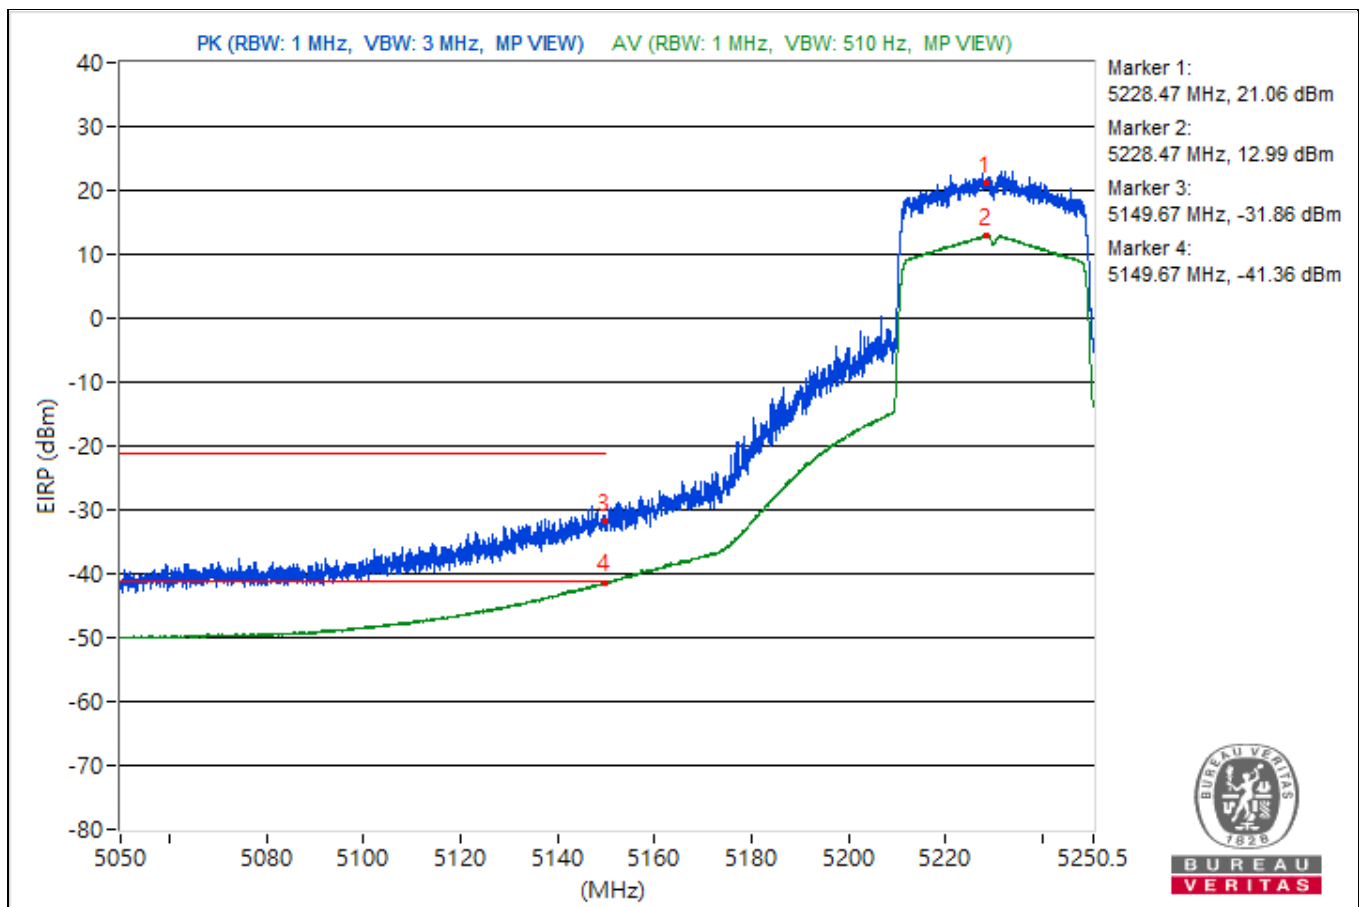


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5271.53	118.07 PK			14.22	15.45	4.92	22.81
2	*5271.53	108.78 AV			5.93	5.22	4.92	13.52
3	5350.75	62.78 PK	74	-11.22	-41.17	-39.76	4.92	-32.48
4	5350.75	53.1 AV	54	-0.9	-49.66	-50.57	4.92	-42.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

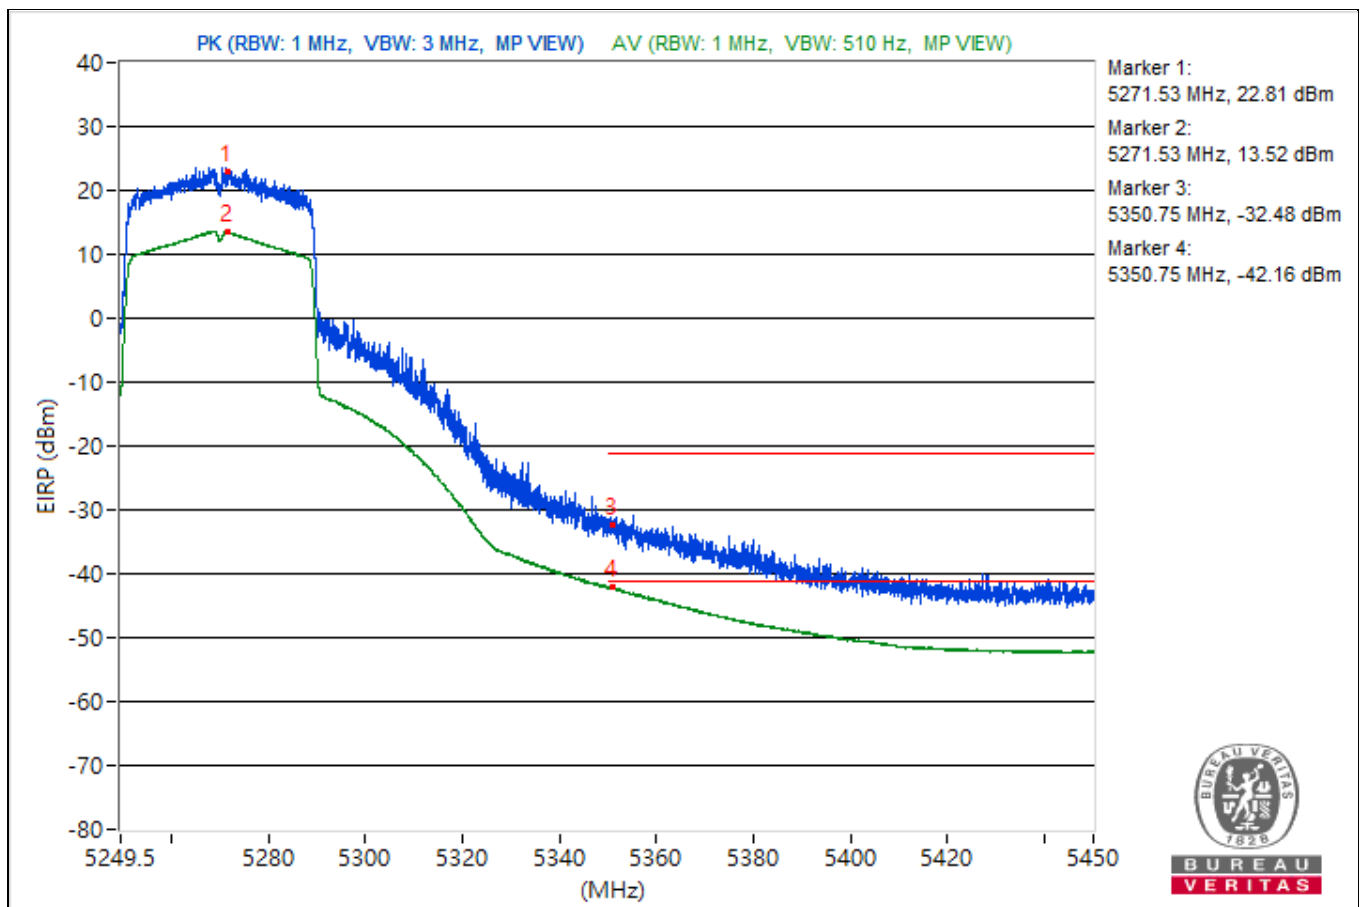


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5308.87	114.98 PK			12.22	11.31	4.92	19.72
2	*5308.87	106.2 AV			3.1	2.92	4.92	10.94
3	5350	59.97 PK	74	-14.03	-41.93	-45.08	4.92	-35.29
4	5350	50.95 AV	54	-3.05	-51.29	-53.46	4.92	-44.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

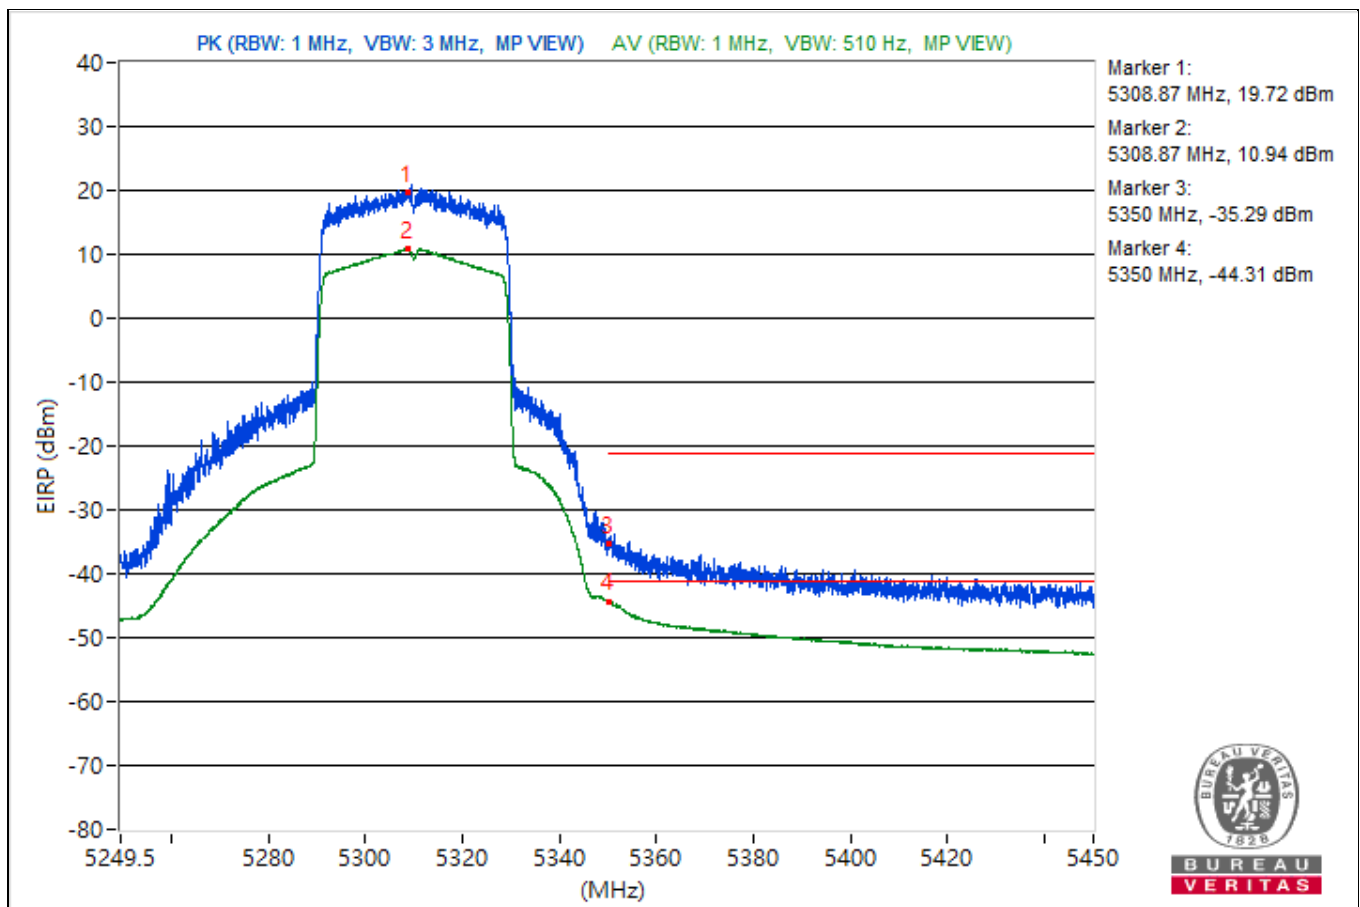


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5508.94	116.74 PK			14.97	11.43	4.92	21.48
2	*5508.03	106.19 AV			3.18	2.82	4.92	10.93
3	5459.11	63.39 PK	74	-10.61	-42.73	-38.07	4.92	-31.87
4	5459.99	50.17 AV	54	-3.83	-53.81	-52.36	4.92	-45.09
5	#5466.24	63.91 PK	68.26	-4.35	-43.45	-37.2	4.92	-31.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

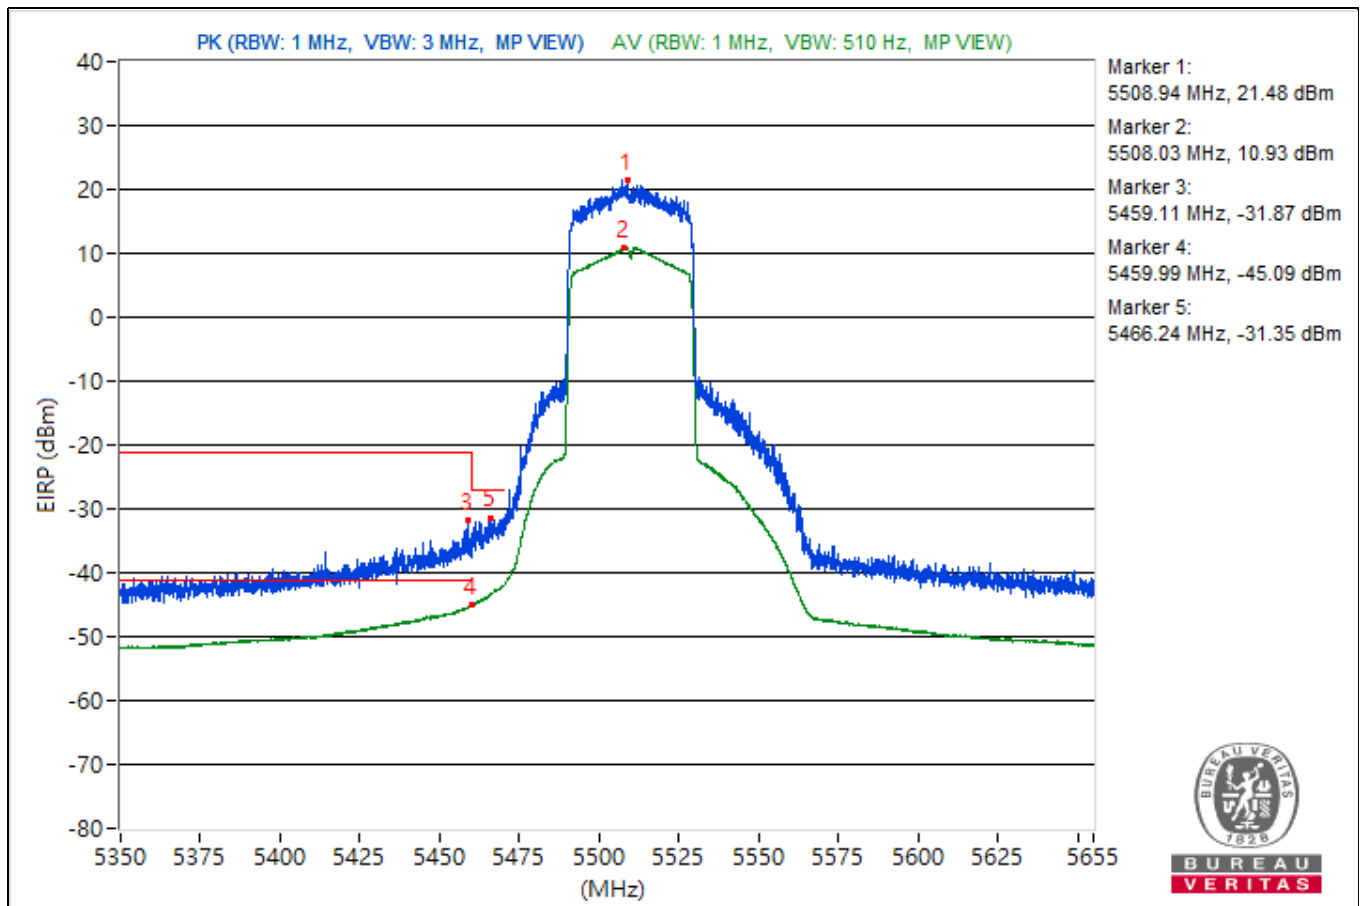


RF Mode	802.11be (EHT40)	Channel	CH 118 : 5590 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5584.55	118.59 PK			14.54	16.12	4.92	23.33
2	*5591.37	108.75 AV			5.86	5.24	4.92	13.49
3	5459.8	57.48 PK	74	-16.52	-47.08	-44.67	4.92	-37.78
4	5458.5	45.66 AV	54	-8.34	-57.05	-58.06	4.92	-49.6
5	#5461.17	57.97 PK	68.26	-10.29	-48.52	-43.36	4.92	-37.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

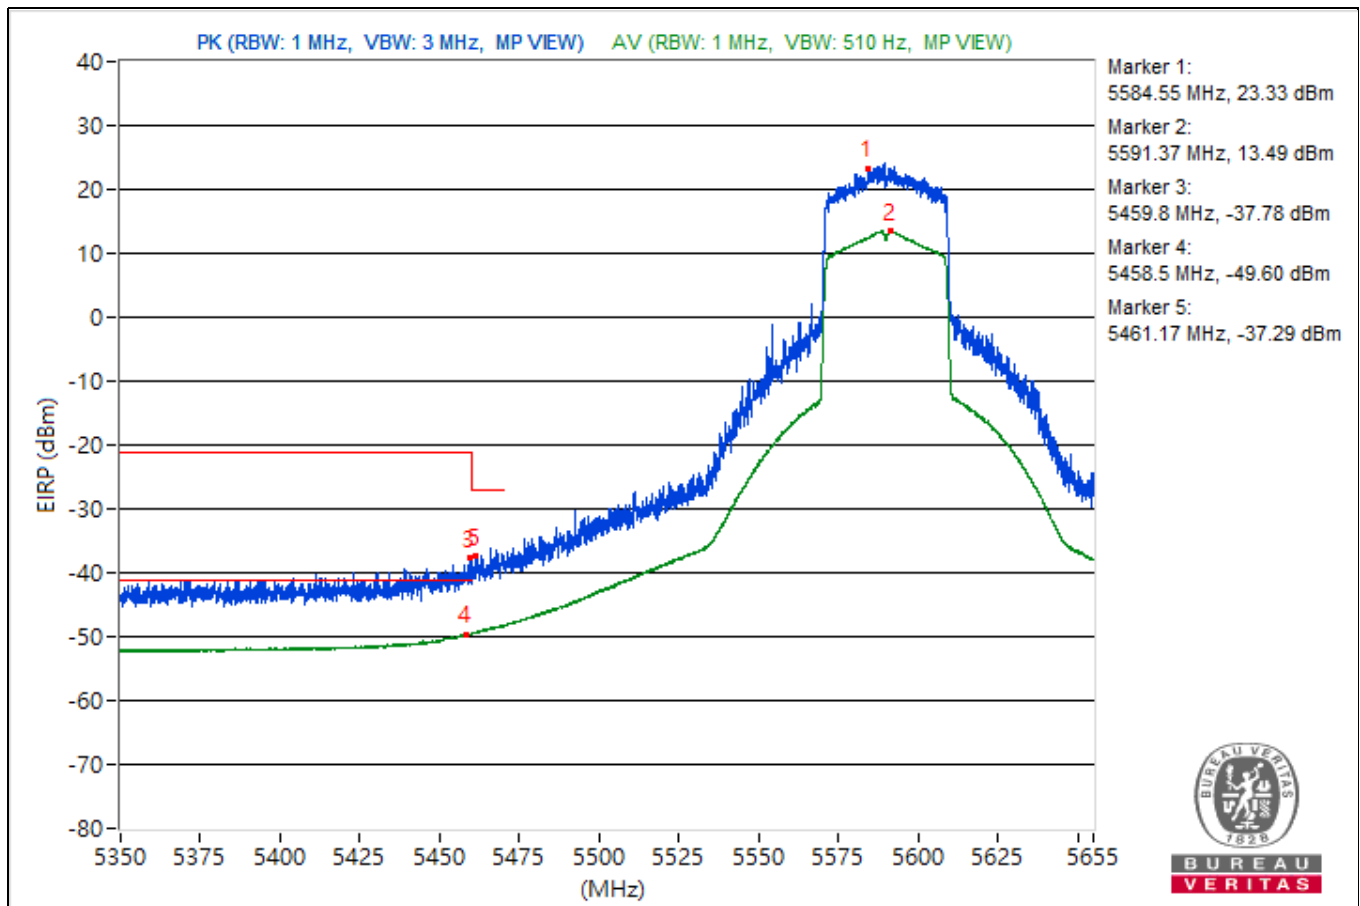


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5670.99	120.07			15.15	18.12	4.92	24.81
2	#5725.49	65.57	68.26	-2.69	-37.87	-37.38	4.92	-29.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

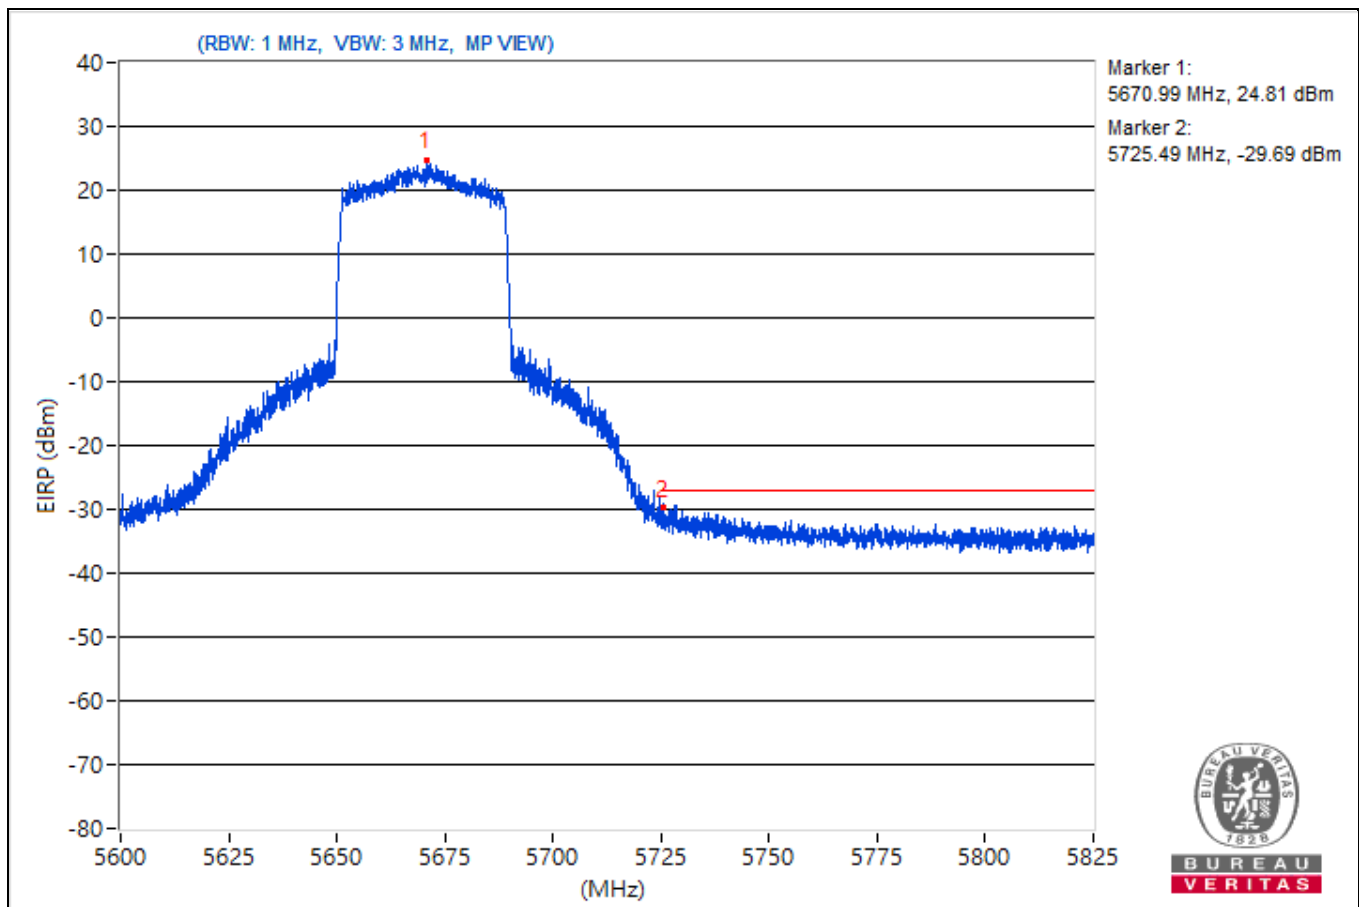


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5705.48	120.82			15.25	19.15	4.92	25.56
2	#5863.55	62.67	68.26	-5.59	-42.35	-39.23	4.92	-32.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

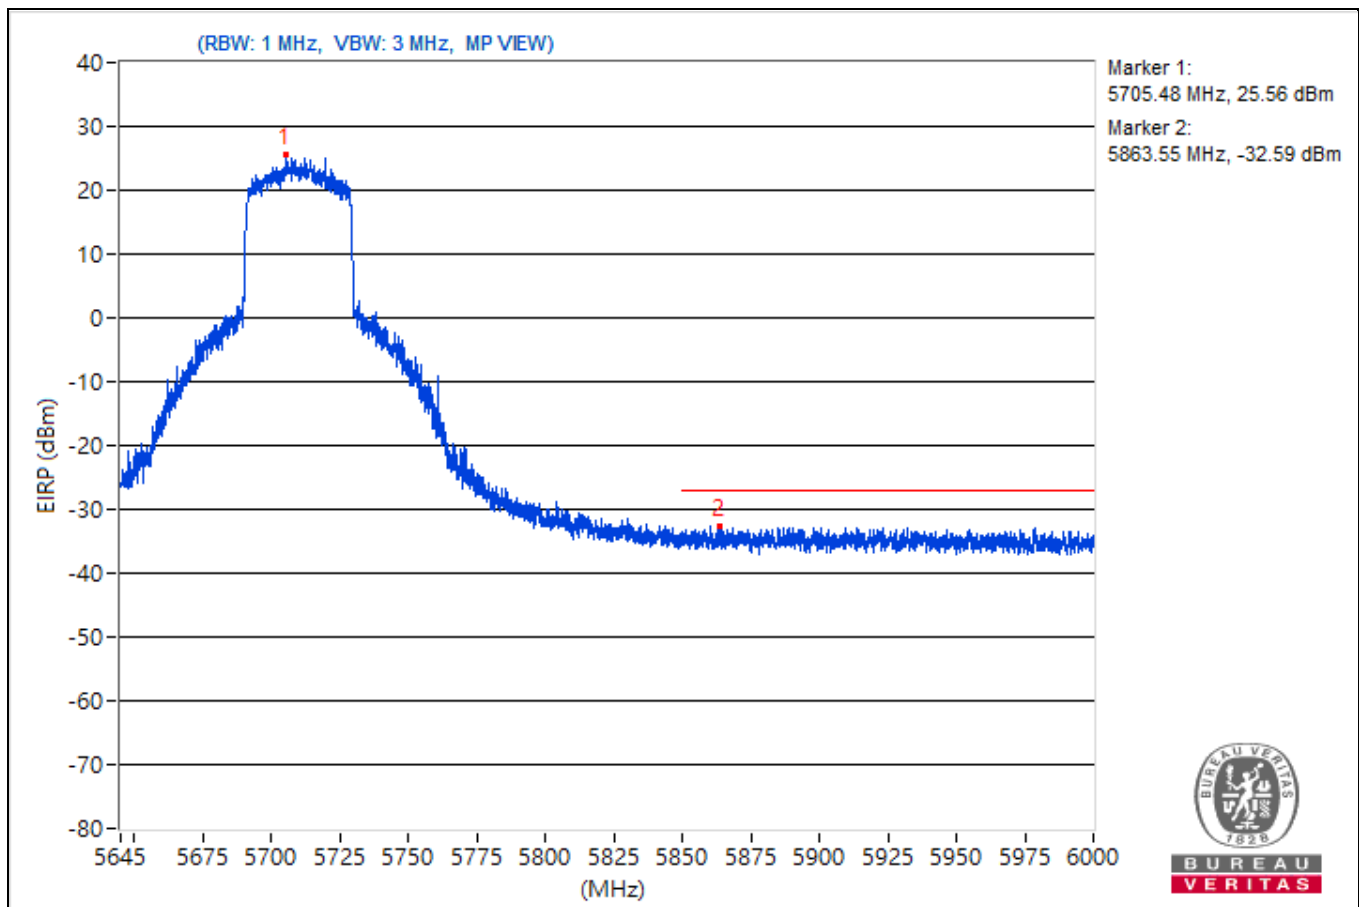


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5756.39	120.15			15.79	17.89	4.92	24.89
2	#5642.62	65.55	68.26	-2.71	-40.69	-35.86	4.92	-29.71
3	#5653.79	67.67	71.06	-3.39	-34.38	-37.08	4.92	-27.59
4	#5718.15	88.36	110.34	-21.98	-12.95	-18.21	4.92	-6.9
5	#5721.12	88.58	113.41	-24.83	-12.83	-17.65	4.92	-6.68
6	#5853.17	66.89	115.04	-48.15	-36.88	-35.78	4.92	-28.37
7	#5866.23	64.98	107.72	-42.74	-39.42	-37.26	4.92	-30.28
8	#5923.47	54.12	69.39	-15.27	-47.89	-50.7	4.92	-41.14
9	#5952.68	54.92	68.26	-13.34	-50.21	-46.93	4.92	-40.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

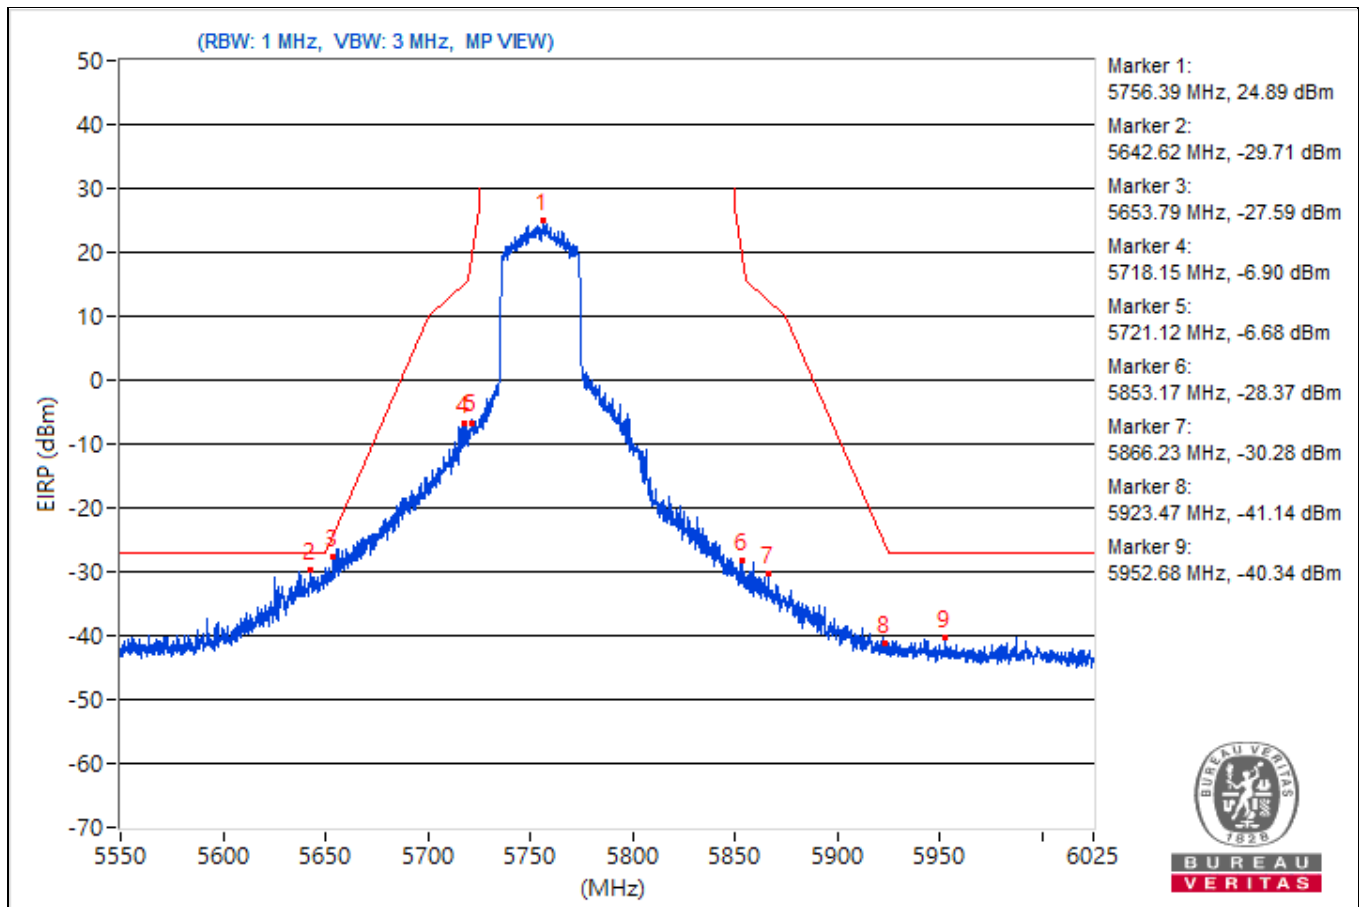


RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5794.03	119.6			15.98	16.81	4.92	24.34
2	#5648.92	58.19	68.26	-10.07	-45.35	-44.67	4.92	-37.07
3	#5651.18	56.96	69.13	-12.17	-47.01	-45.58	4.92	-38.3
4	#5703.66	65.98	106.29	-40.31	-40.74	-35.3	4.92	-29.28
5	#5720.17	67.77	111.24	-43.47	-33.65	-38.46	4.92	-27.49
6	#5854.71	73.48	111.52	-38.04	-29.45	-29.99	4.92	-21.78
7	#5856.61	74.71	110.41	-35.7	-26.02	-34.66	4.92	-20.55
8	#5923.59	57.37	69.31	-11.94	-47.21	-44.77	4.92	-37.89
9	#5925.37	57.93	68.26	-10.33	-43.5	-48.27	4.92	-37.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

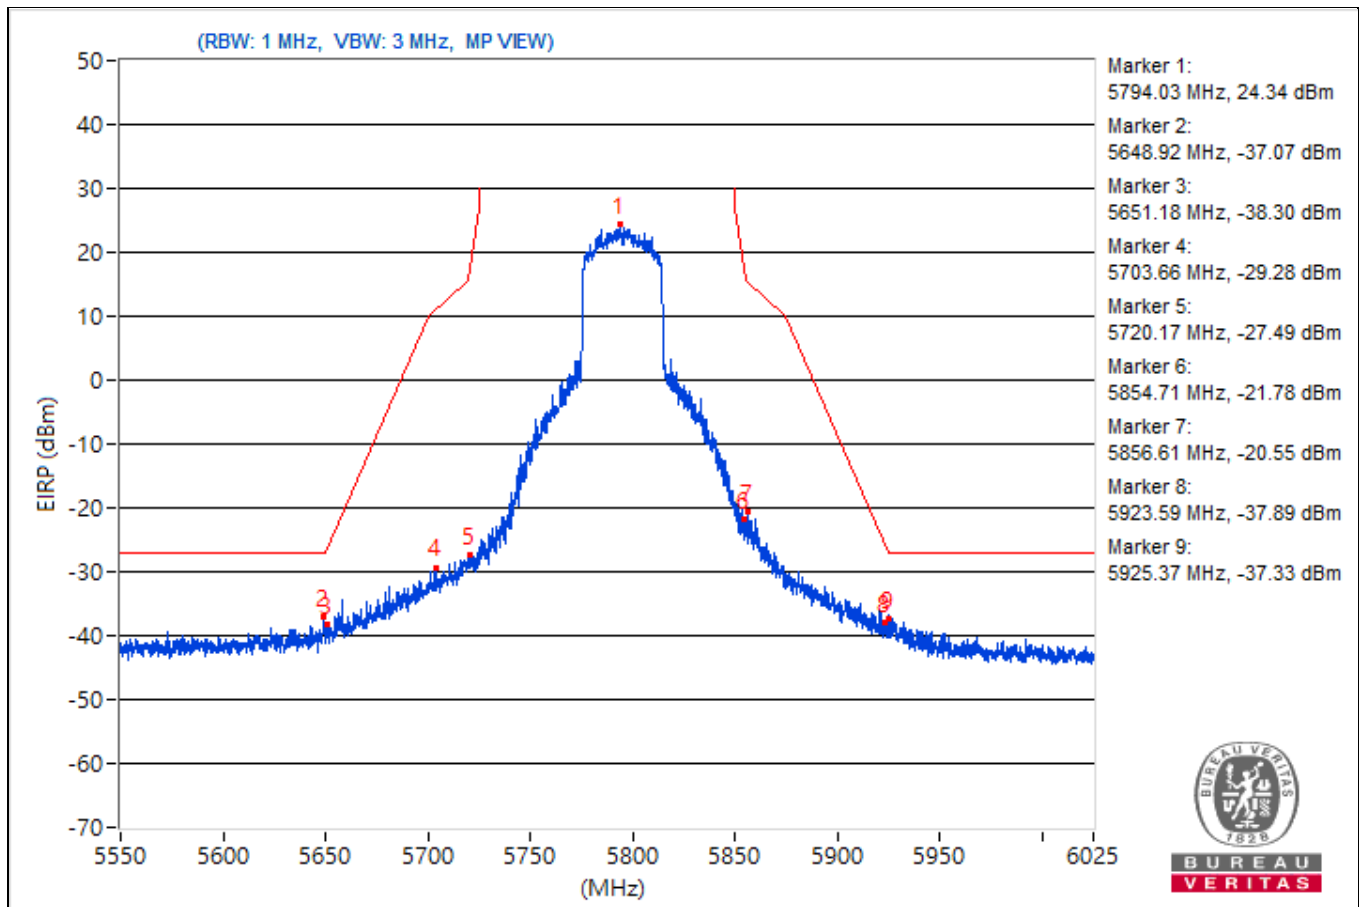


RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5211.59	110.9 PK			8.12	7.25	4.92	15.64
2	*5211.59	102.9 AV			-0.01	-0.6	4.92	7.64
3	5149.26	63.22 PK	74	-10.78	-39.82	-40.13	4.92	-32.04
4	5149.26	53.99 AV	54	-0.01	-49.1	-49.31	4.92	-41.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

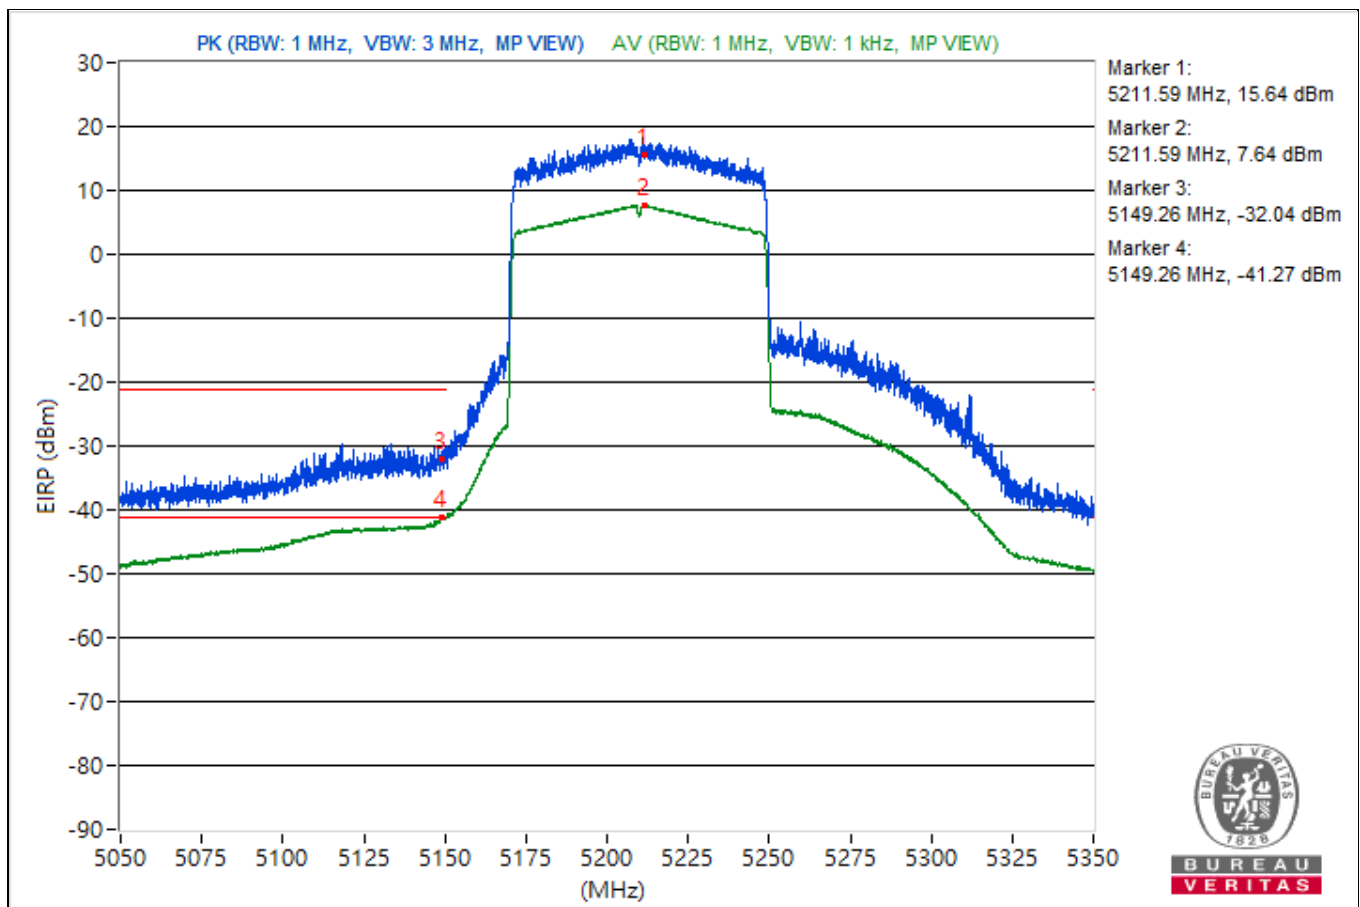


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5288.9	109.66 PK			6.07	6.83	4.92	14.4
2	*5288.9	102.29 AV			-0.8	-1.01	4.92	7.03
3	5361.35	61.59 PK	74	-12.41	-39.9	-44.42	4.92	-33.67
4	5361.35	53.54 AV	54	-0.46	-48.86	-50.63	4.92	-41.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

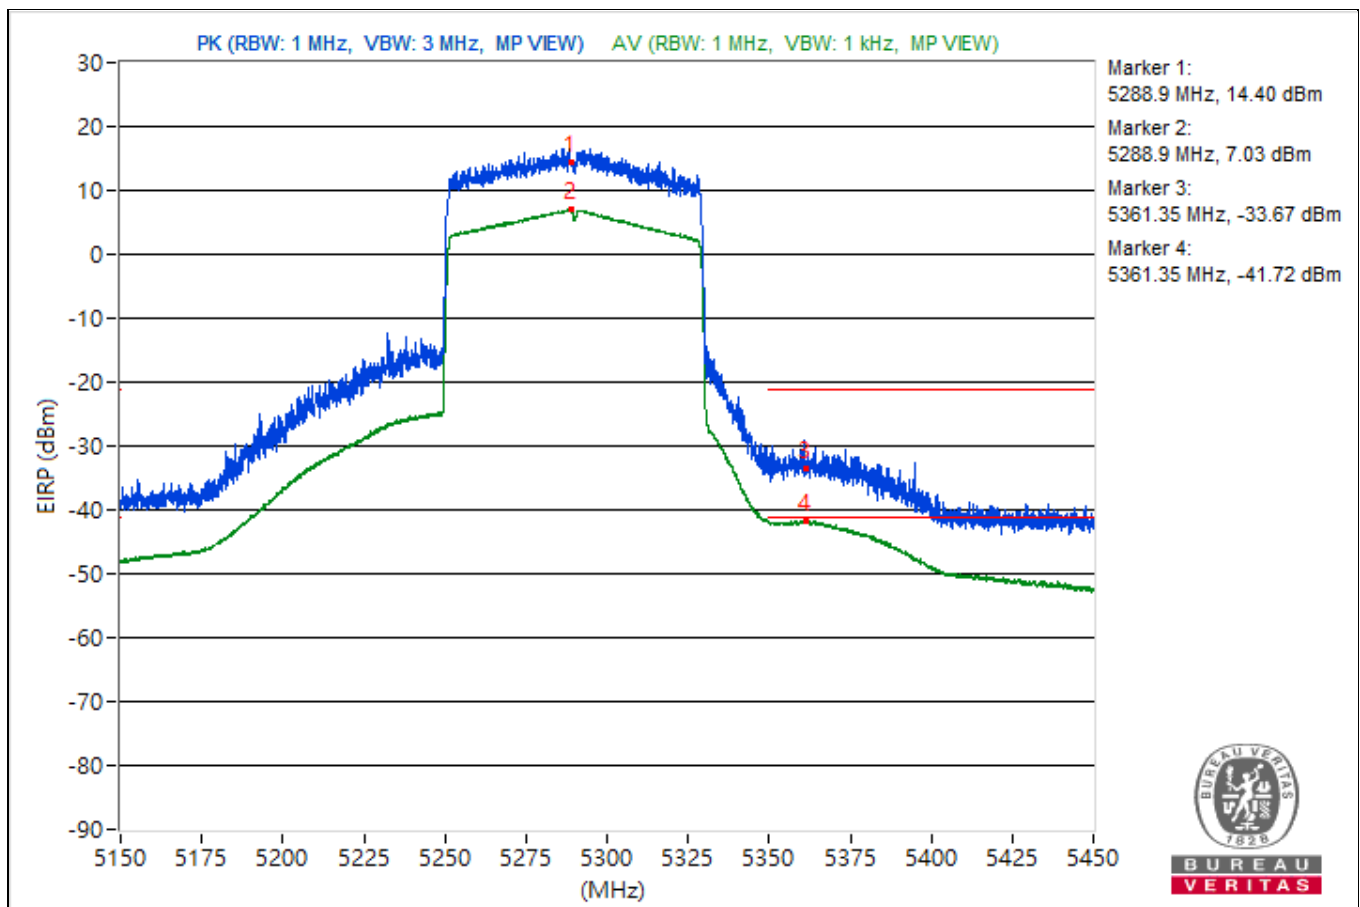


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5525.76	111.49 PK			6.14	9.73	4.92	16.23
2	*5528.39	100.81 AV			-2.44	-2.32	4.92	5.55
3	5455.23	64.74 PK	74	-9.26	-37.3	-40.02	4.92	-30.52
4	5457.06	53.62 AV	54	-0.38	-49.65	-49.49	4.92	-41.64
5	#5469.33	65.58 PK	68.26	-2.68	-37.97	-37.27	4.92	-29.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

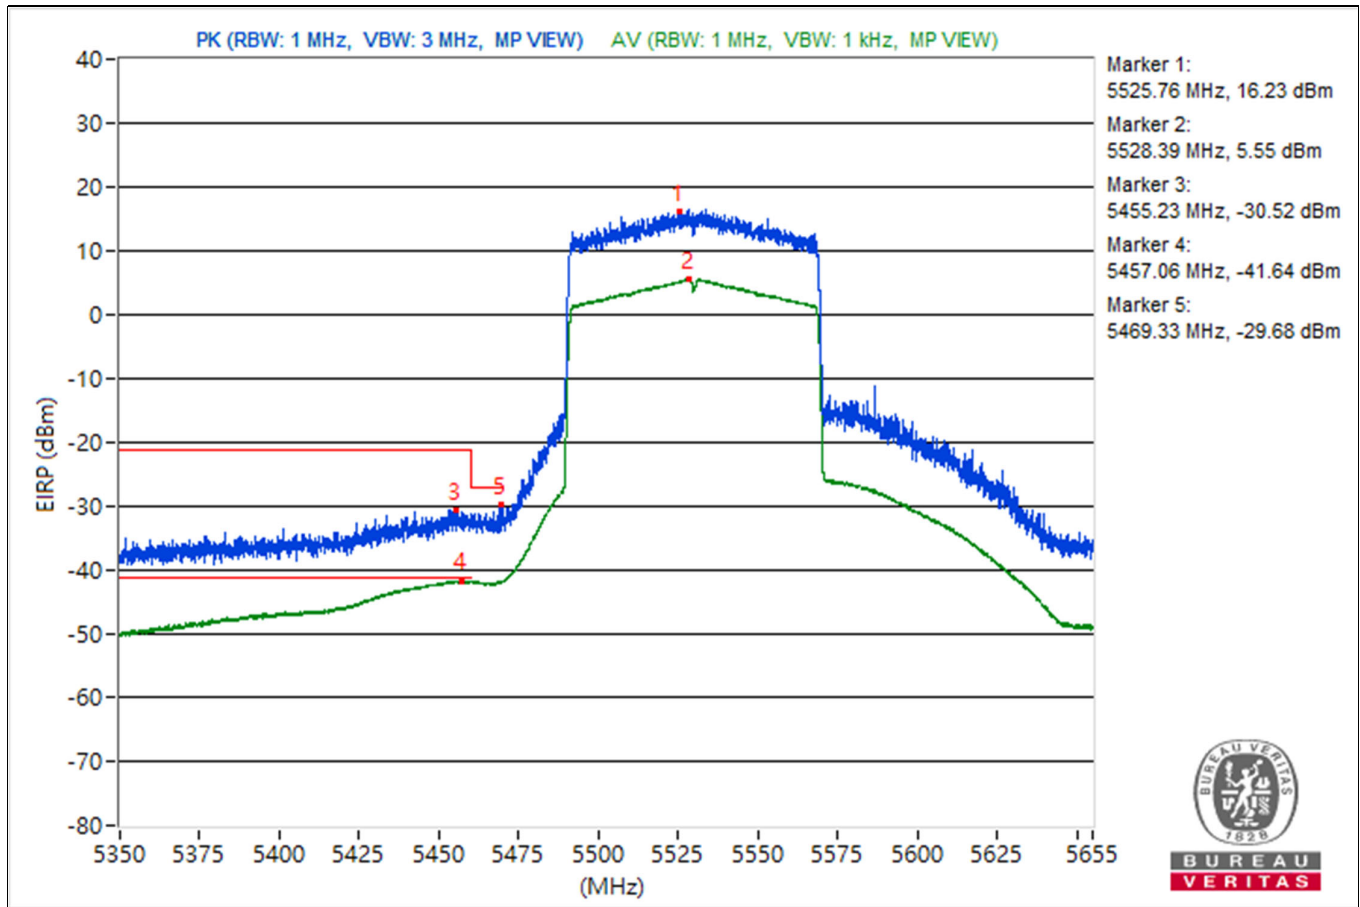


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5602.31	115.24 PK			13.53	9.8	4.92	19.98
2	*5611.65	103.32 AV			0.27	-0.01	4.92	8.06
3	5457.82	63.55 PK	74	-10.45	-38.4	-41.4	4.92	-31.71
4	5459.84	52.26 AV	54	-1.74	-51.1	-50.78	4.92	-43
5	#5469.83	65.46 PK	68.26	-2.8	-38.75	-36.9	4.92	-29.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

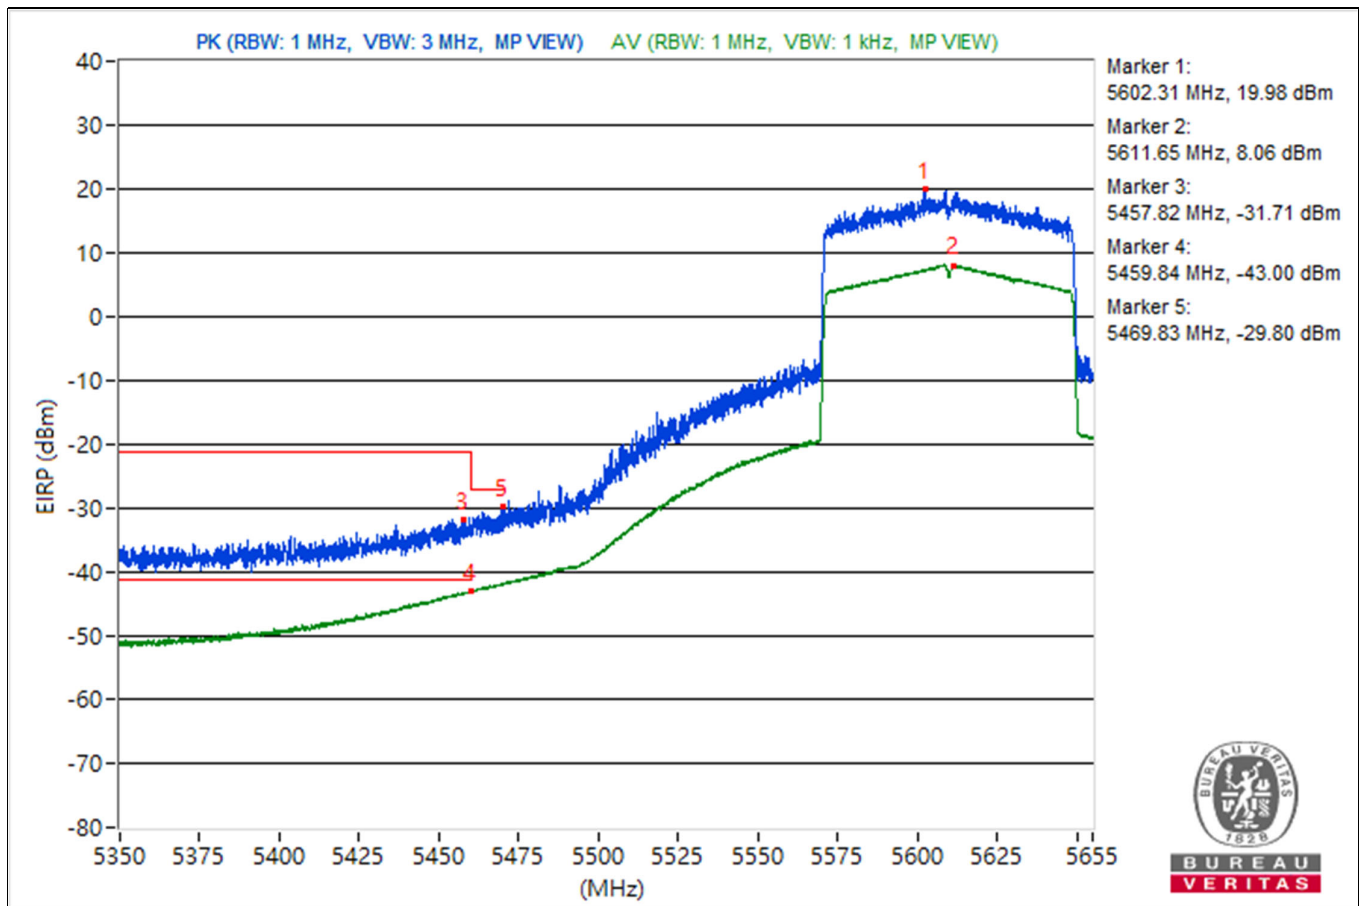


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5692.44	116.96			11.61	15.2	4.92	21.7
2	#5866.21	63.93	68.26	-4.33	-37.98	-41.09	4.92	-31.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

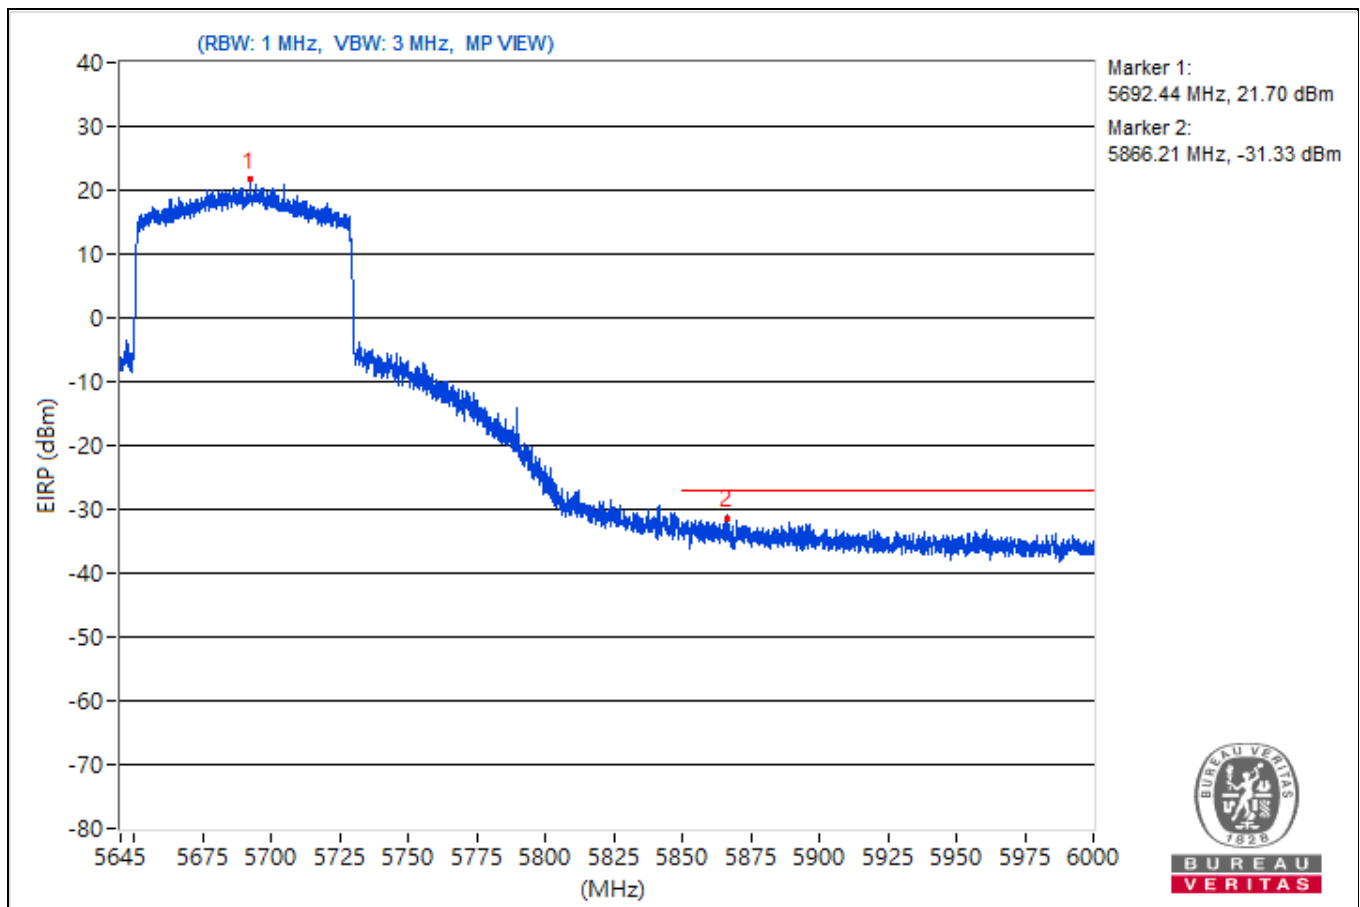


RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5776.81	116.84			14.23	12.98	4.92	21.58
2	#5649.99	68.03	68.26	-0.23	-34.62	-35.78	4.92	-27.23
3	#5650.11	67.74	68.34	-0.6	-34.29	-37.04	4.92	-27.52
4	#5709.84	85.31	108.01	-22.7	-22.59	-15.67	4.92	-9.95
5	#5721.36	87.57	113.95	-26.38	-19.56	-13.59	4.92	-7.69
6	#5854.12	82.5	112.87	-30.37	-23.12	-19.14	4.92	-12.76
7	#5858.39	82.39	109.91	-27.52	-20.17	-21.54	4.92	-12.87
8	#5924.54	63.35	68.6	-5.25	-40.37	-39.36	4.92	-31.91
9	#5927.39	61.9	68.26	-6.36	-44.52	-39.46	4.92	-33.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

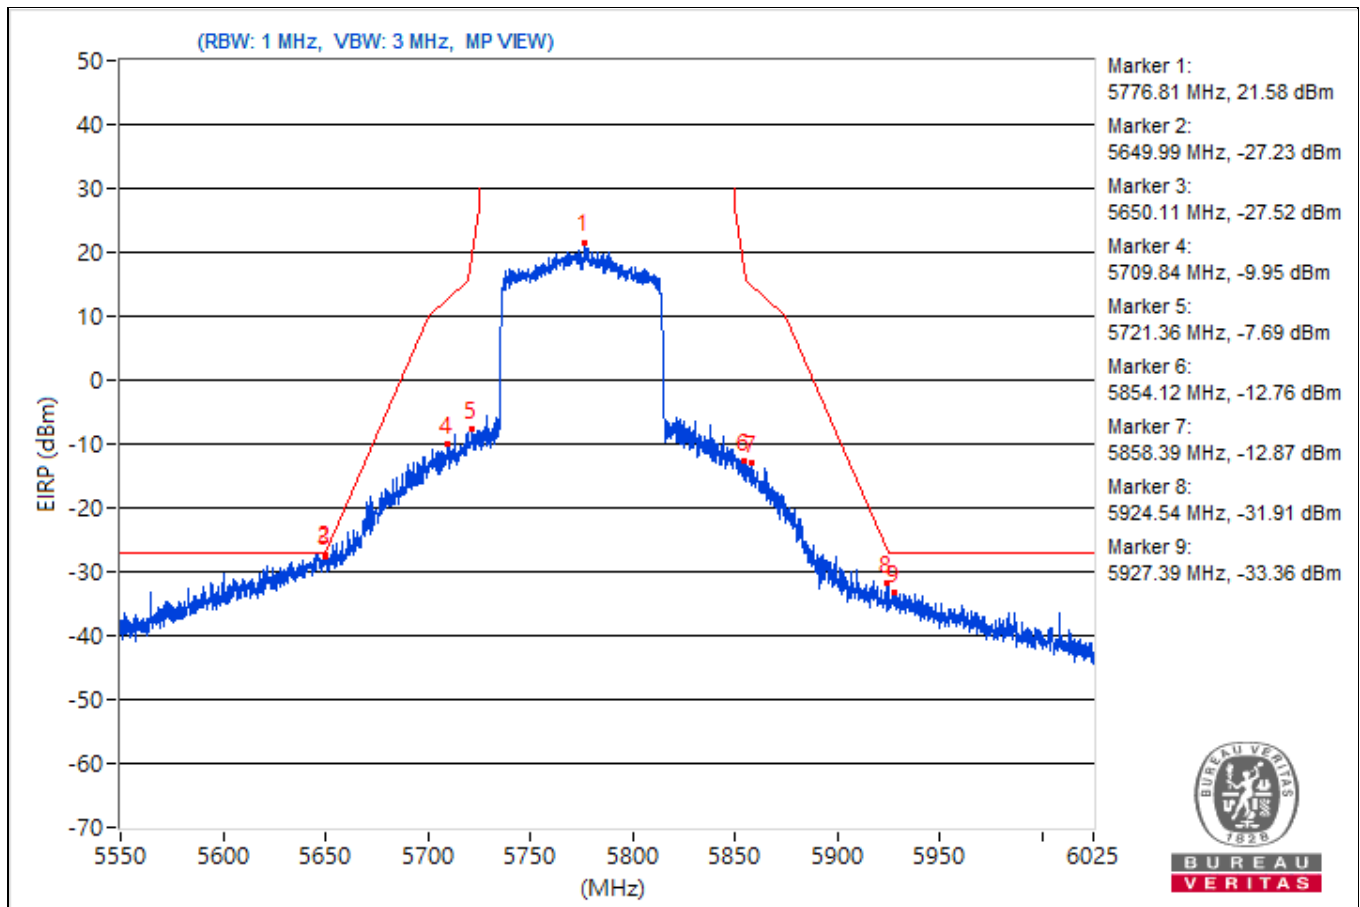


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5246.87	105.9 PK			2.69	2.72	4.92	10.64
2	*5246.87	98.62 AV			-4.11	-5.07	4.92	3.36
3	5149.41	62.85 PK	74	-11.15	-41.71	-39.31	4.92	-32.41
4	5149.41	53.88 AV	54	-0.12	-50.12	-48.62	4.92	-41.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

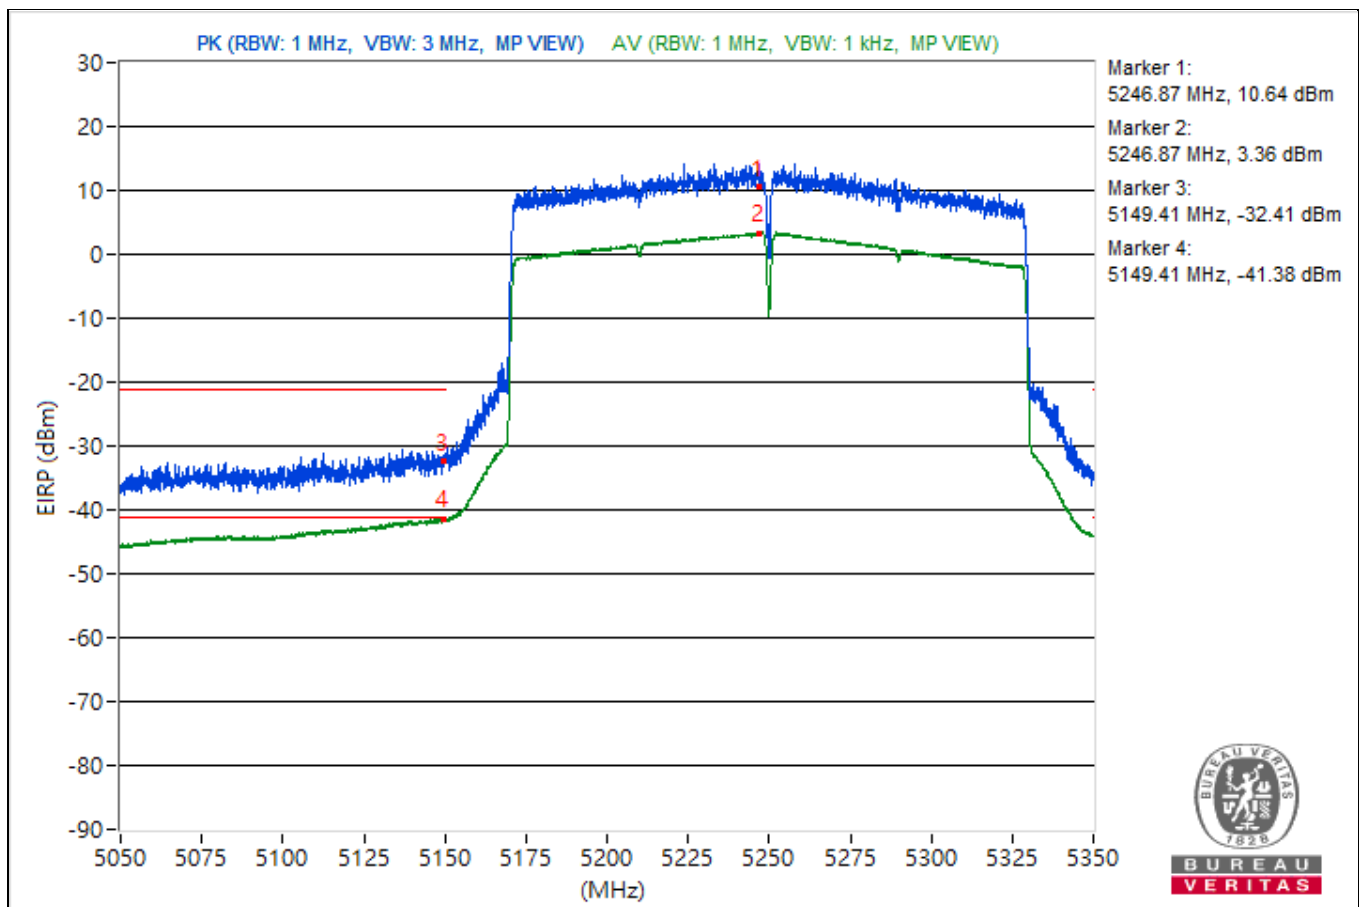


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5252.49	106.91 PK			3.68	3.76	4.92	11.65
2	*5252.49	98.69 AV			-4.46	-4.55	4.92	3.43
3	5350.62	59.94 PK	74	-14.06	-42.5	-44.16	4.92	-35.32
4	5350.62	51.39 AV	54	-2.61	-51.16	-52.56	4.92	-43.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

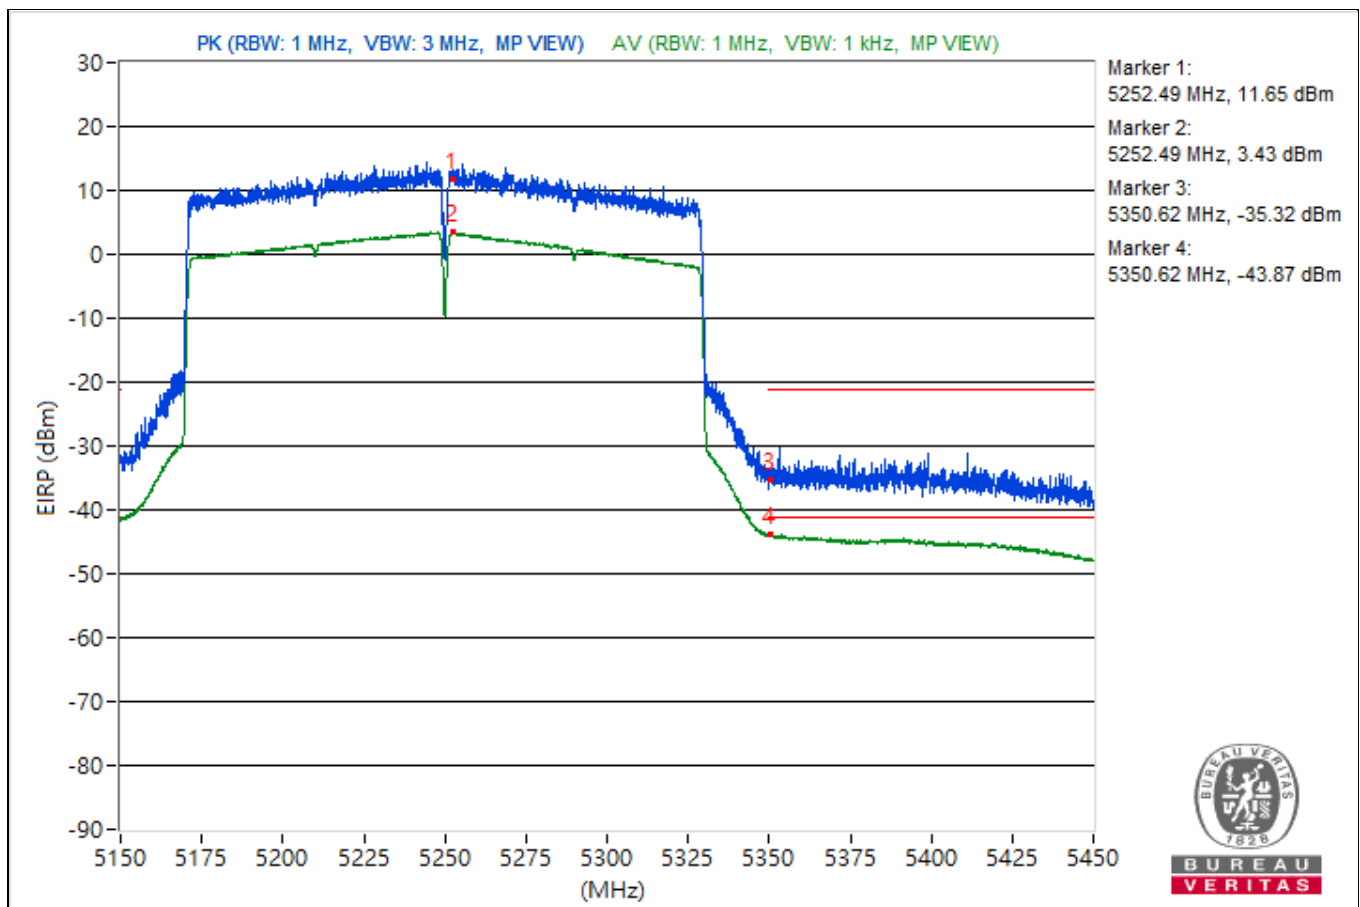


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5578.25	108.82 PK			1.57	7.69	4.92	13.56
2	*5573.56	97.45 AV			-5.61	-5.87	4.92	2.19
3	5455.11	64.6 PK	74	-9.4	-37.16	-40.75	4.92	-30.66
4	5459.99	53.53 AV	54	-0.47	-49.81	-49.52	4.92	-41.73
5	#5467.77	64.58 PK	68.26	-3.68	-38.03	-39.28	4.92	-30.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

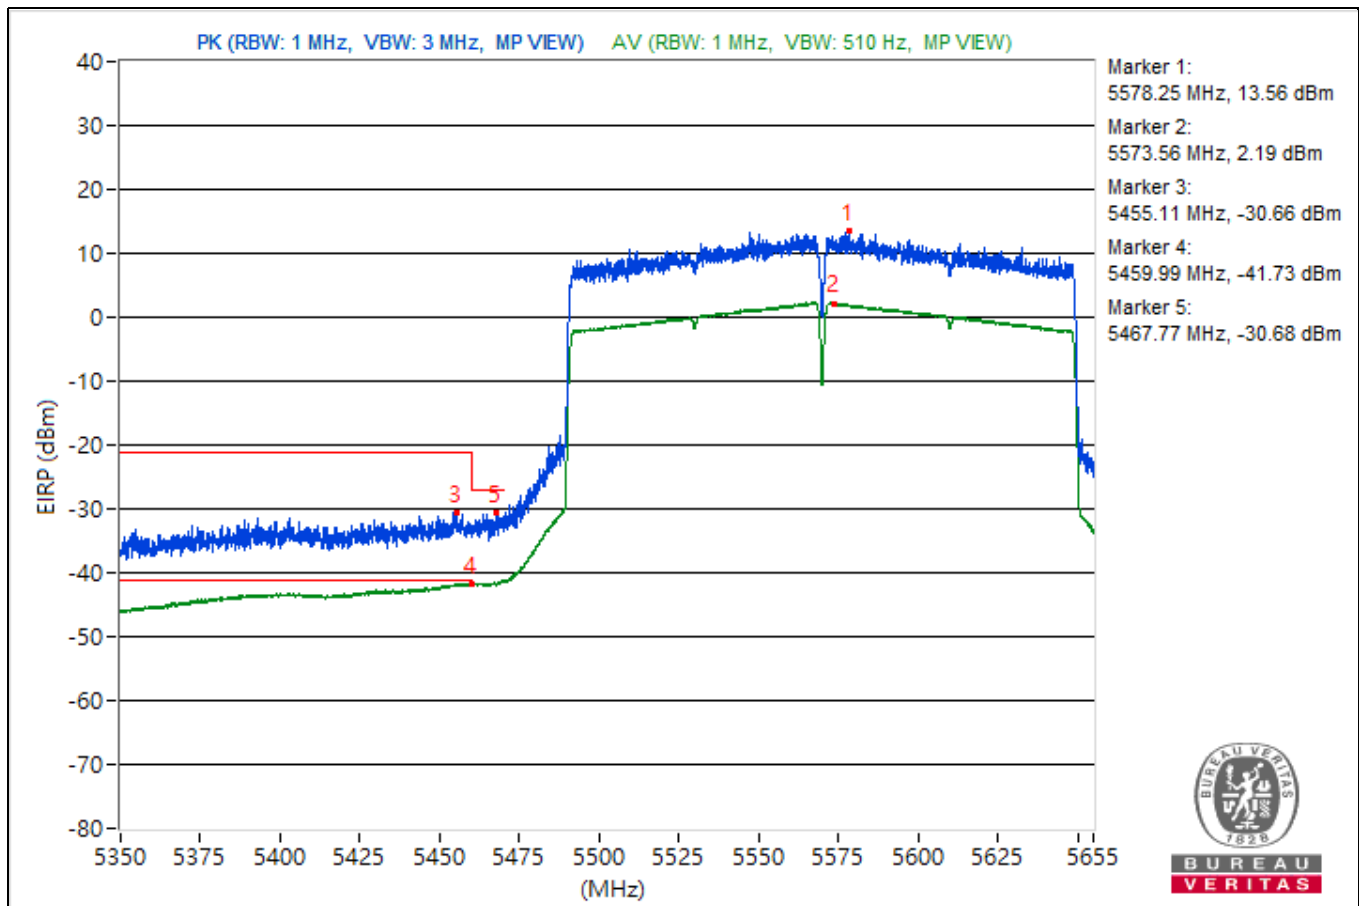


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5171.39	119.54 PK			17.07	15.48	4.92	24.28
2	*5171.39	111.74 AV			8.76	8.33	4.92	16.48
3	5148.48	57.23 PK	74	-16.77	-46.6	-45.41	4.92	-38.03
4	5148.48	48.02 AV	54	-5.98	-55.98	-54.49	4.92	-47.24

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

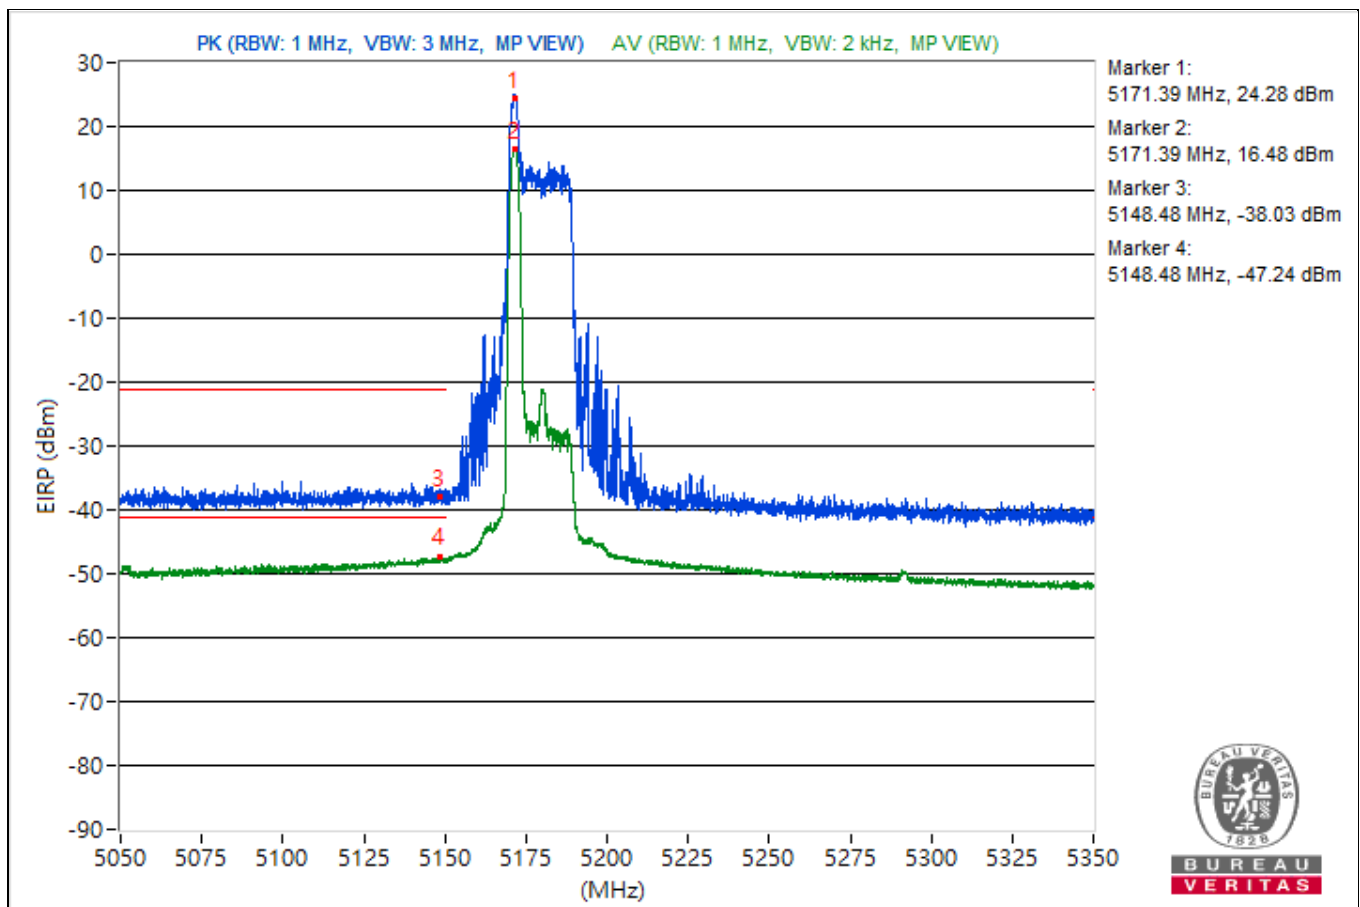


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5328.5	118.93 PK			16.02	15.44	4.92	23.67
2	*5328.5	111.26 AV			8.44	7.68	4.92	16
3	5353.29	54.18 PK	74	-19.82	-48.46	-49.64	4.92	-41.08
4	5353.29	45.94 AV	54	-8.06	-56.5	-58.16	4.92	-49.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

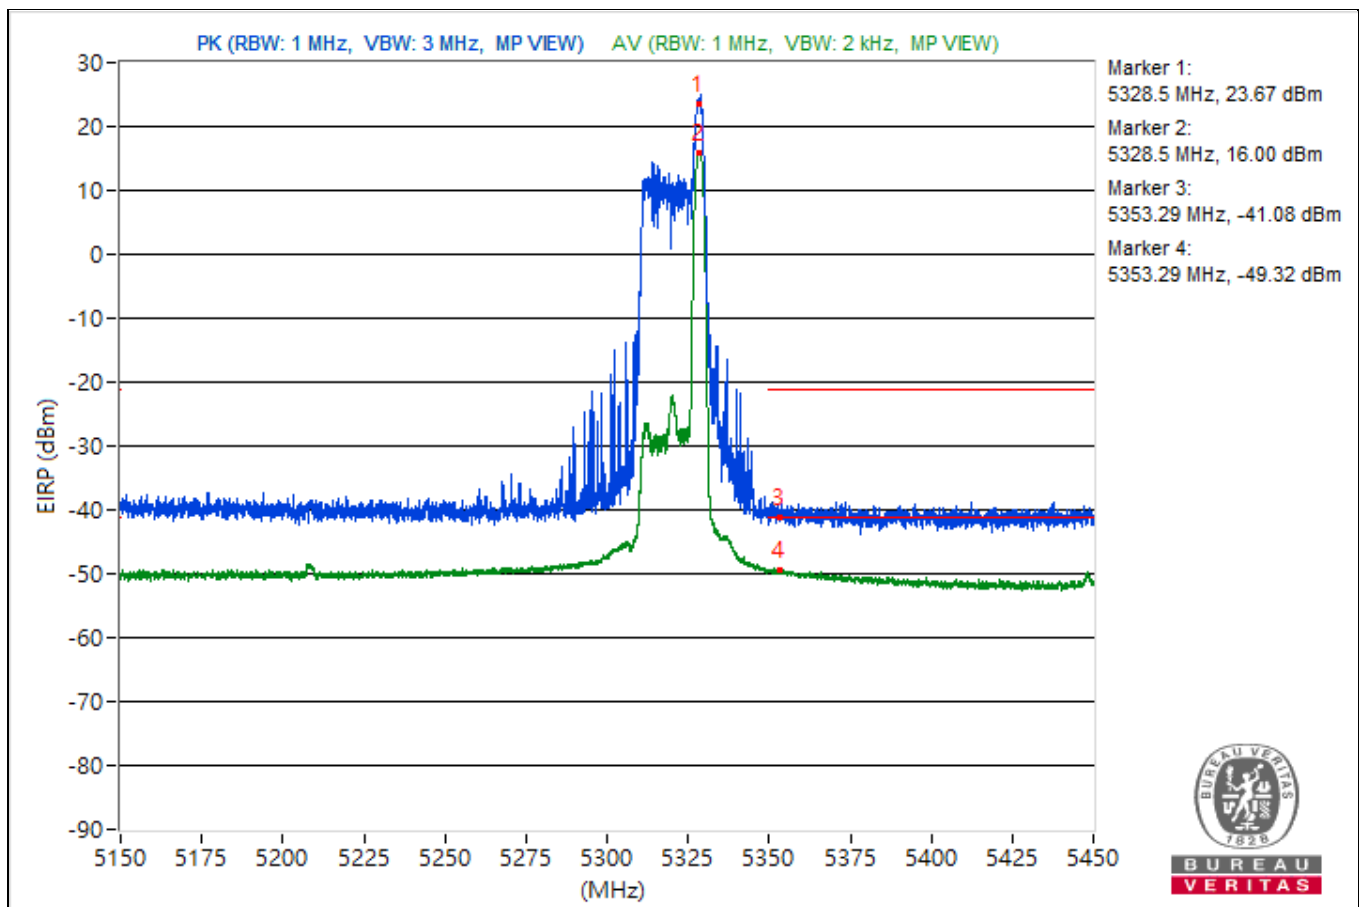


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5491.44	120.43 PK			16.91	17.55	4.92	25.17
2	*5491.6	111.71 AV			8.61	8.42	4.92	16.45
3	5455.72	57.98 PK	74	-16.02	-44.27	-46.41	4.92	-37.28
4	5454.01	46.33 AV	54	-7.67	-57.27	-56.48	4.92	-48.93
5	#5464.98	57.79 PK	68.26	-10.47	-44.2	-47.05	4.92	-37.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

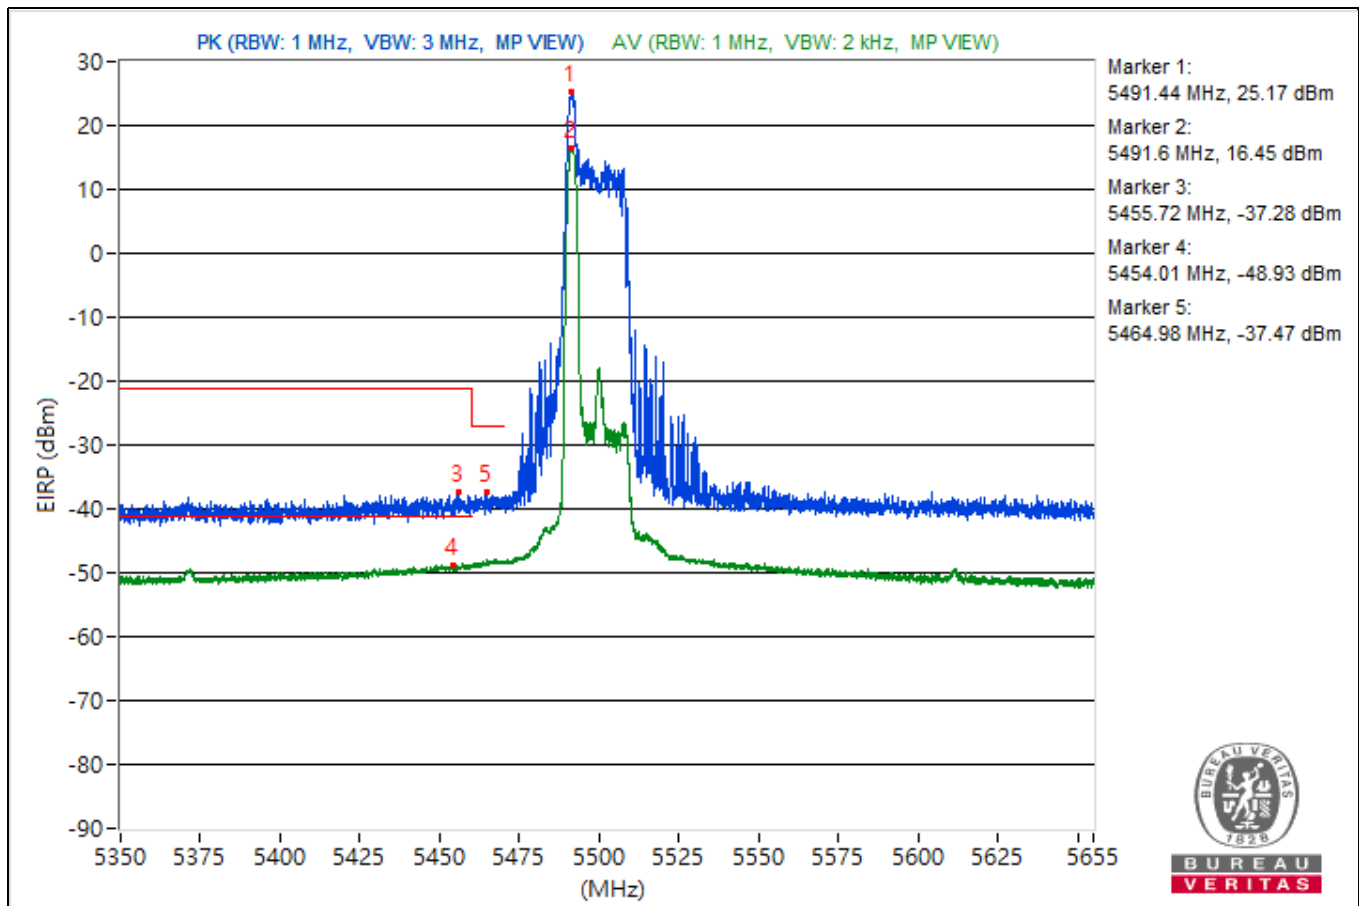


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.7	120.24			18.05	15.74	4.92	24.98
2	#5726.11	58.21	68.26	-10.05	-45.38	-44.6	4.92	-37.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

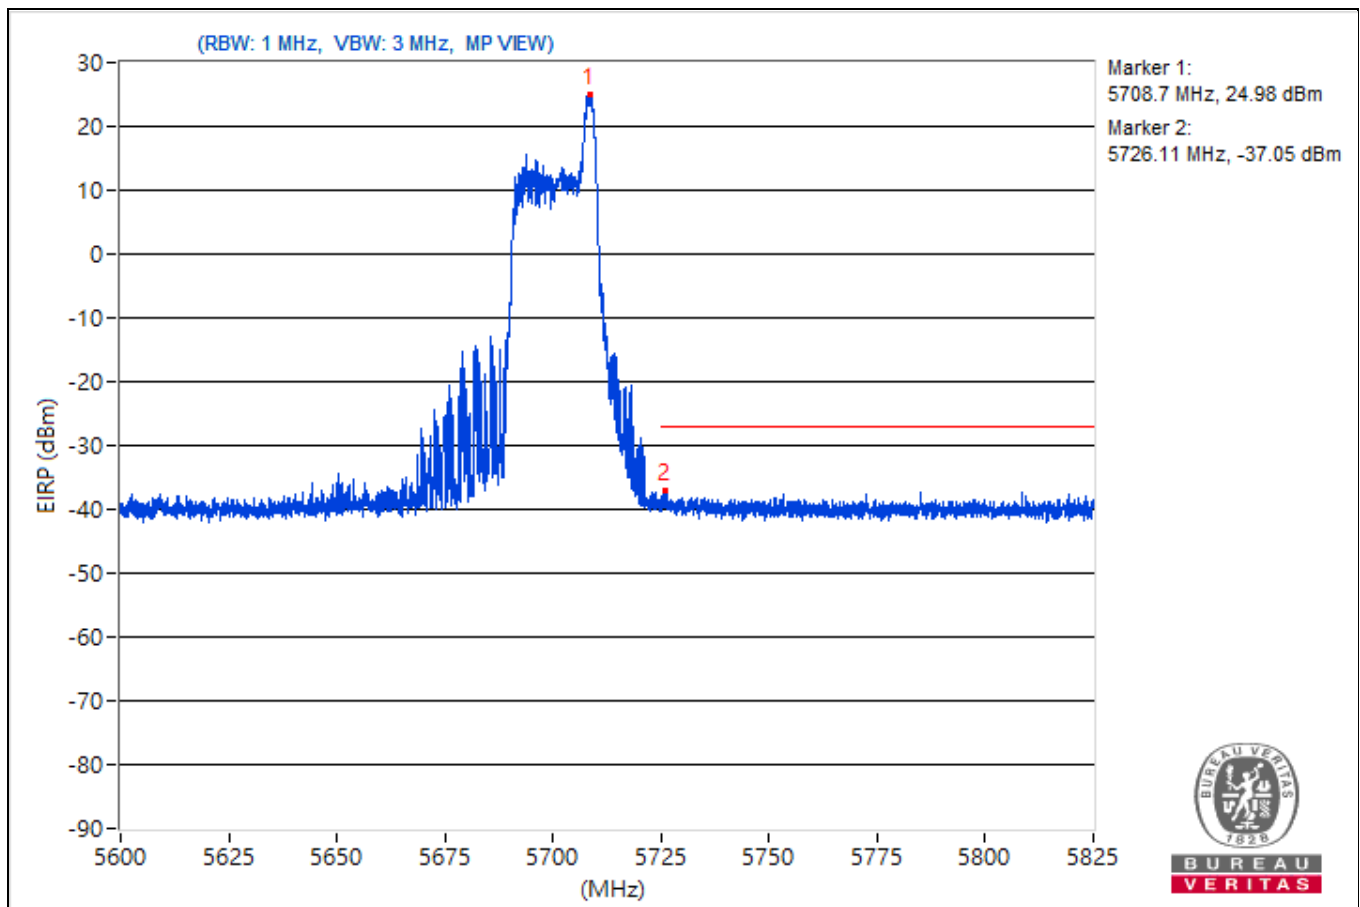


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5728.2	119.23			16.91	14.95	4.92	23.97
2	#5884.98	57.51	68.26	-10.75	-49.03	-43.82	4.92	-37.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

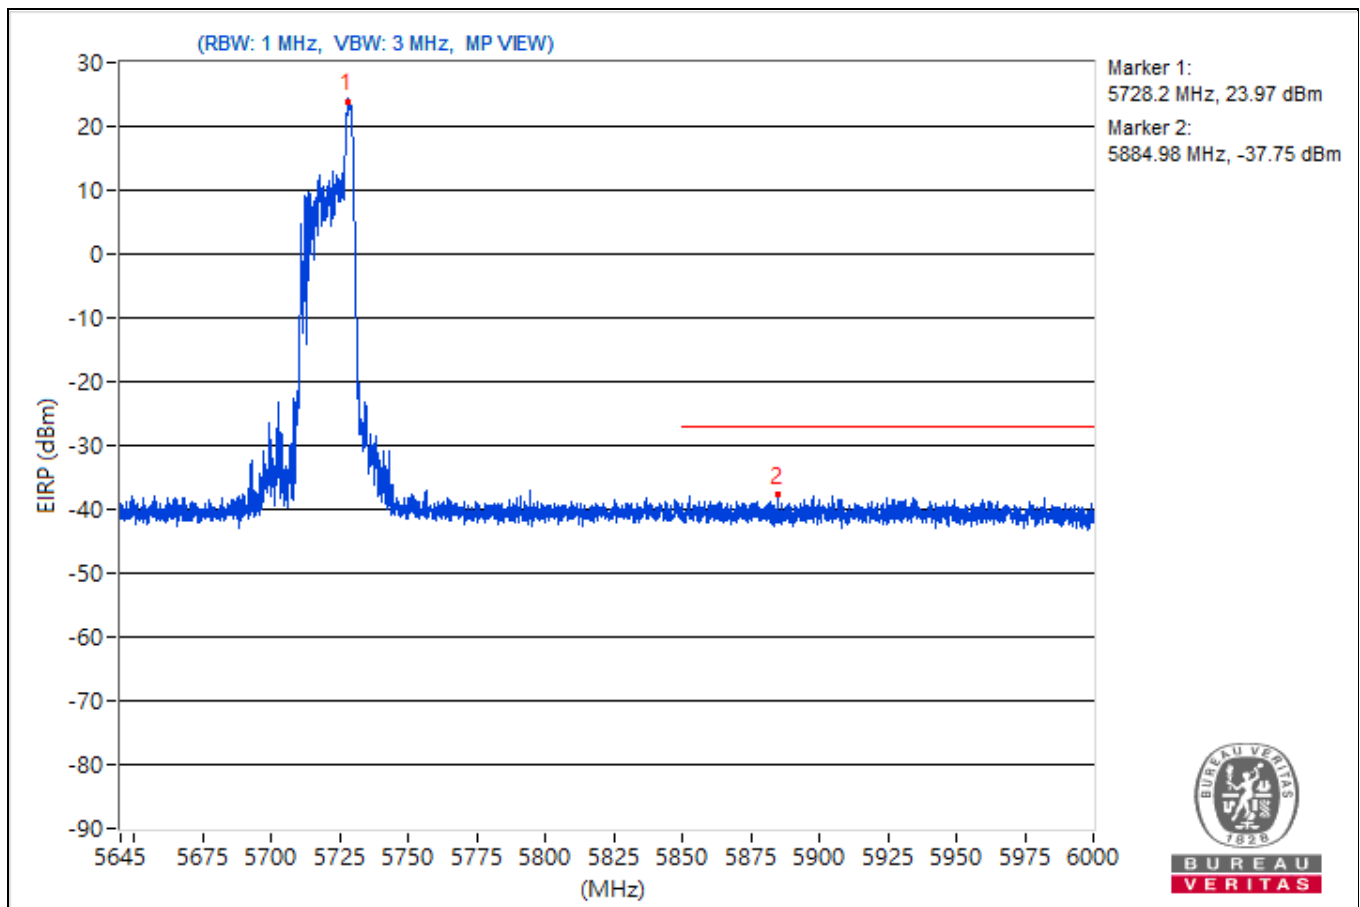


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5737.03	127.67			23.8	25.07	4.92	32.41
2	#5594.53	62.16	68.26	-6.1	-39.72	-42.93	4.92	-33.1
3	#5651.18	59.88	69.13	-9.25	-42.59	-44.17	4.92	-35.38
4	#5700.34	74.25	105.35	-31.1	-26.24	-37.51	4.92	-21.01
5	#5720.64	75.67	112.33	-36.66	-25.26	-32.53	4.92	-19.59
6	#5854.71	60.32	111.52	-51.2	-44.17	-41.87	4.92	-34.94
7	#5871.93	61.9	106.12	-44.22	-42.85	-40.15	4.92	-33.36
8	#5923.71	60.47	69.22	-8.75	-43.25	-42.24	4.92	-34.79
9	#5986.17	61.59	68.26	-6.67	-42.53	-40.84	4.92	-33.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

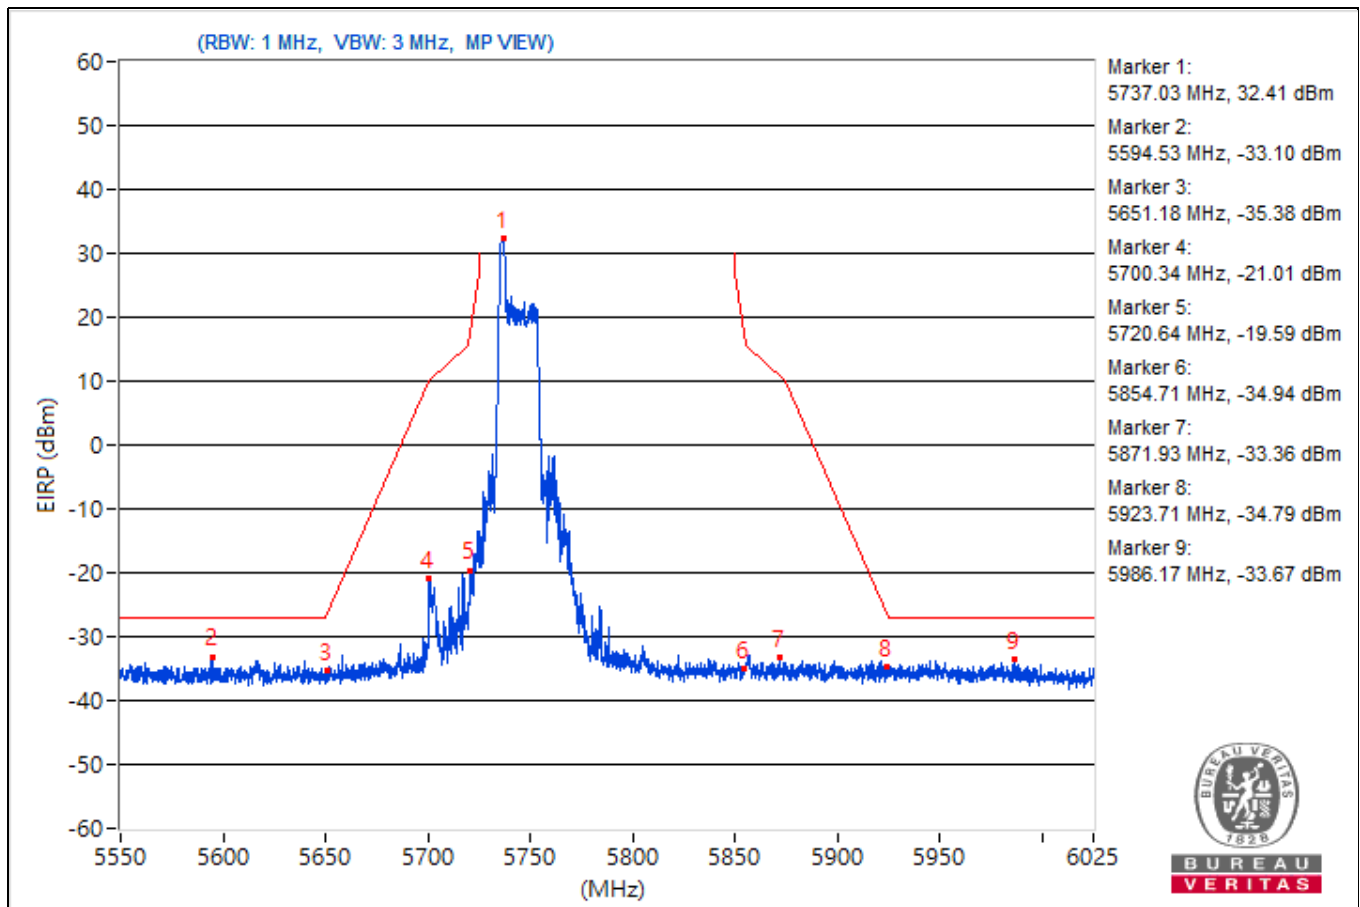


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5833.1	128			25.15	24.43	4.92	32.74
2	#5638.71	60.57	68.26	-7.69	-45.23	-41	4.92	-34.69
3	#5652.24	60.5	69.92	-9.42	-43.67	-41.89	4.92	-34.76
4	#5701.52	60.13	105.69	-45.56	-44.27	-42.11	4.92	-35.13
5	#5720.05	59.57	110.97	-51.4	-42.39	-45.36	4.92	-35.69
6	#5854.83	71.08	111.24	-40.16	-37.09	-29.85	4.92	-24.18
7	#5868.25	73.72	107.15	-33.43	-31.21	-28.24	4.92	-21.54
8	#5924.77	60.93	68.43	-7.5	-42.5	-42.03	4.92	-34.33
9	#5952.56	61.93	68.26	-6.33	-42.94	-40.05	4.92	-33.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

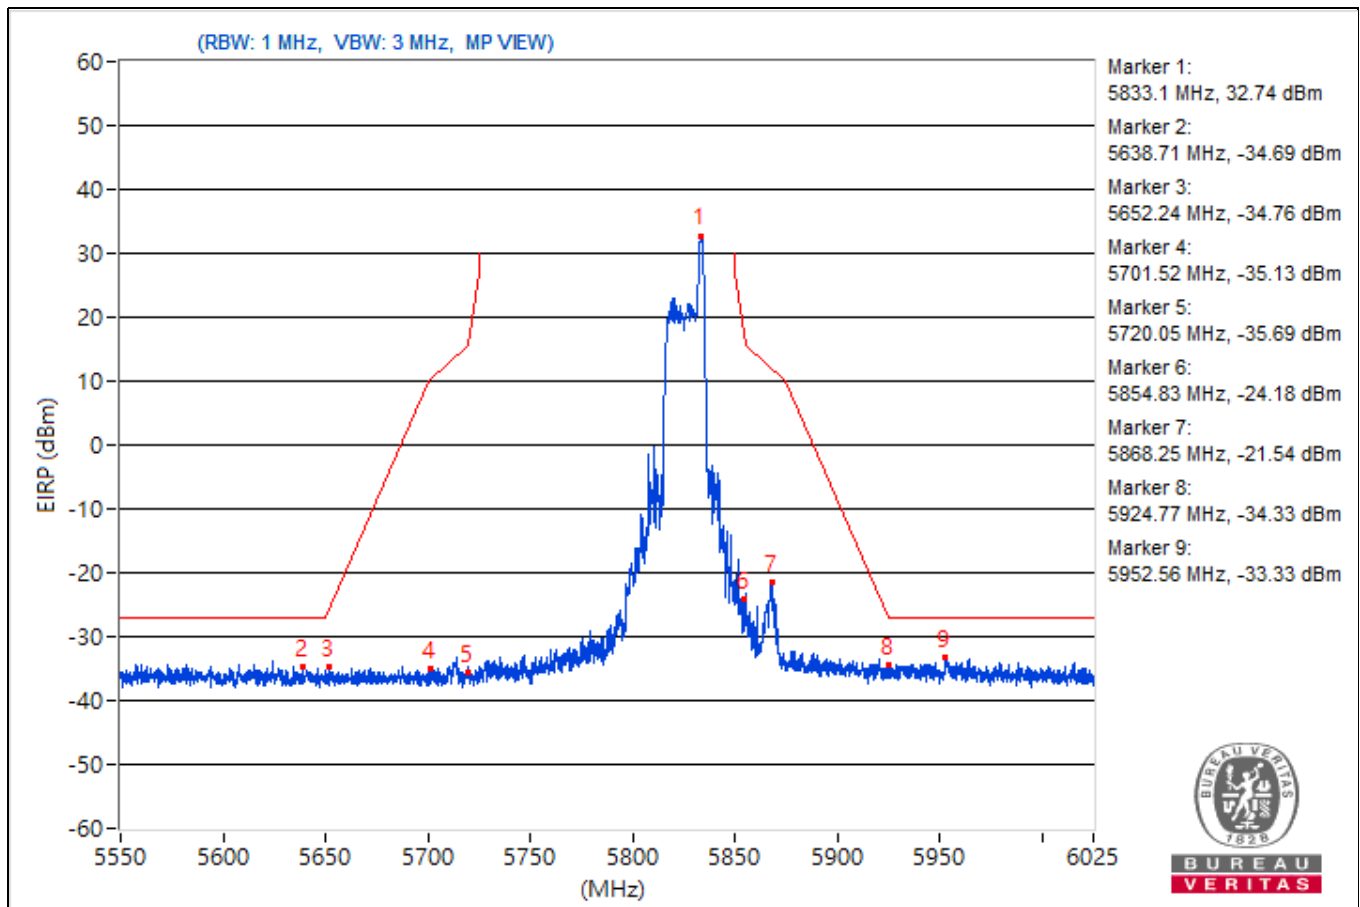


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5173.41	119.35 PK			16.64	15.61	4.92	24.09
2	*5173.41	111.43 AV			8.44	8.04	4.92	16.17
3	5148.32	55.81 PK	74	-18.19	-47.12	-47.66	4.92	-39.45
4	5148.32	48.61 AV	54	-5.39	-54.7	-54.45	4.92	-46.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

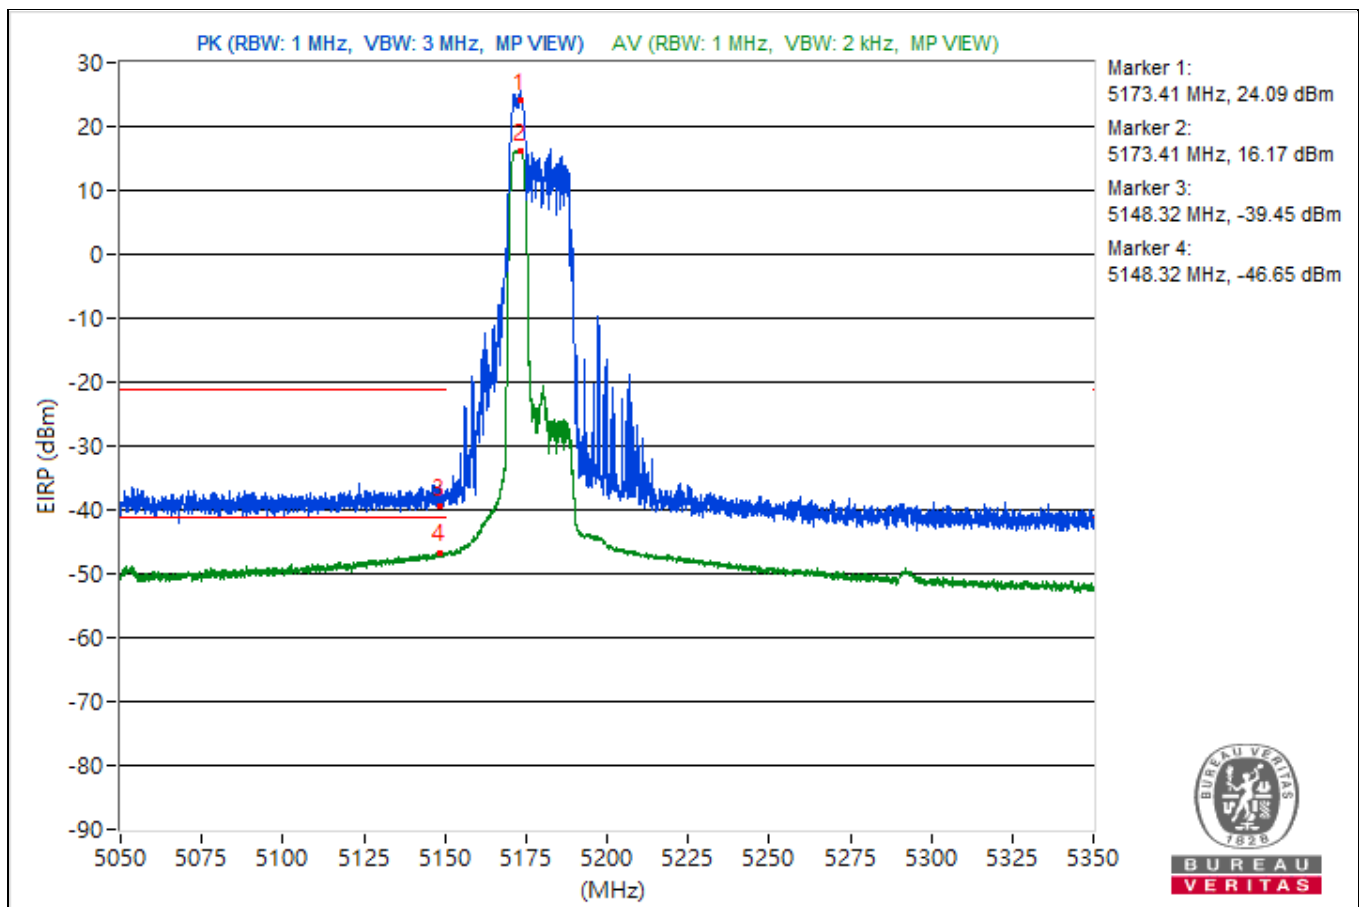


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5328.09	116.01 PK			14.04	11.11	4.92	20.75
2	*5328.09	108.22 AV			5.56	4.43	4.92	12.96
3	5351.6	54.58 PK	74	-19.42	-48.12	-49.16	4.92	-40.68
4	5351.6	45.71 AV	54	-8.29	-56.66	-58.5	4.92	-49.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

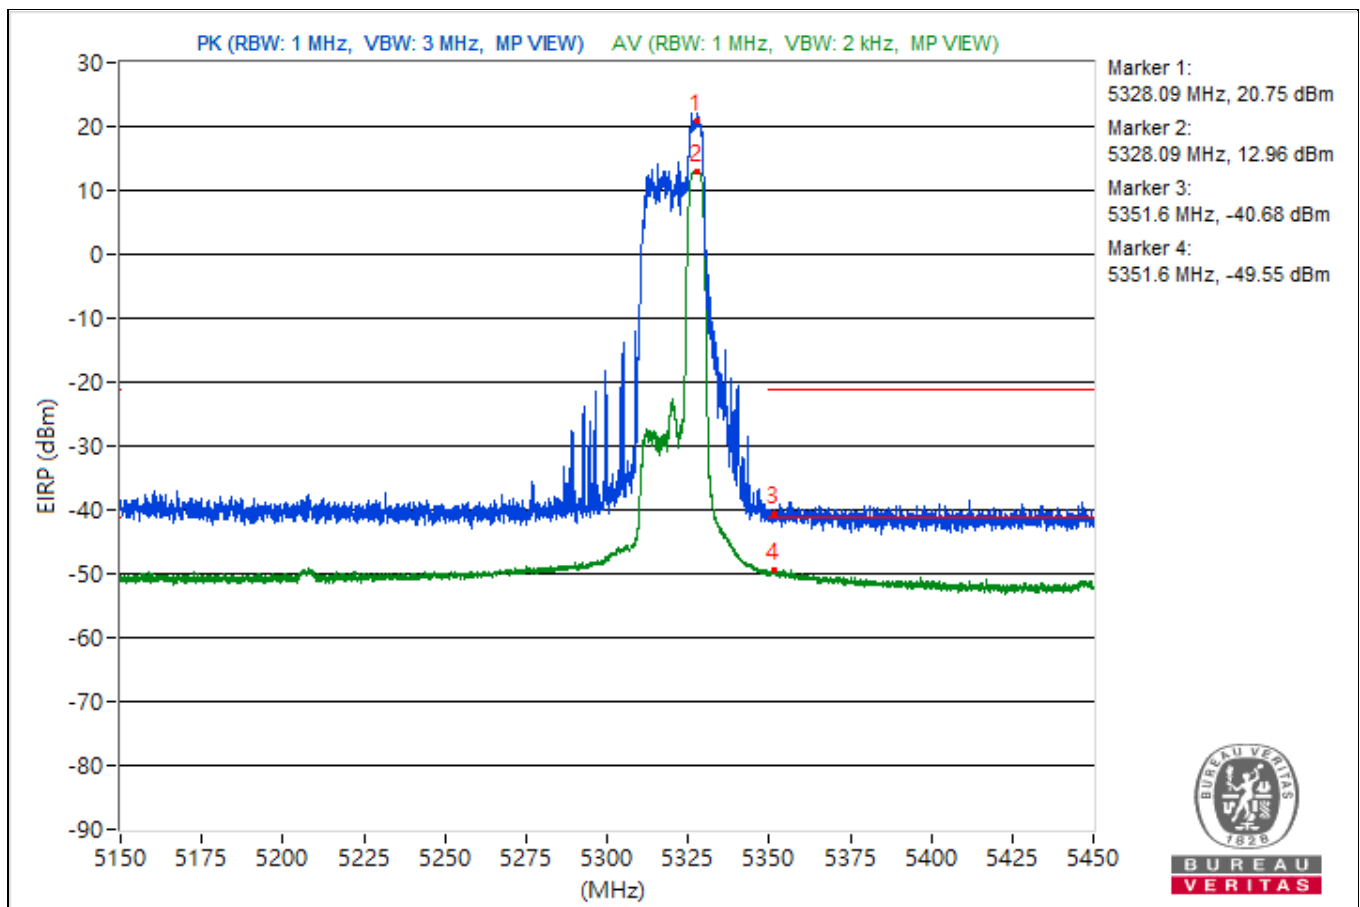


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5493.2	120.35 PK			17.56	16.73	4.92	25.09
2	*5492.24	111.47 AV			8.35	8.2	4.92	16.21
3	5459.84	58.57 PK	74	-15.43	-43.5	-46.14	4.92	-36.69
4	5459.99	47.51 AV	54	-6.49	-55.92	-55.46	4.92	-47.75
5	#5466.43	58.54 PK	68.26	-9.72	-43.77	-45.76	4.92	-36.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

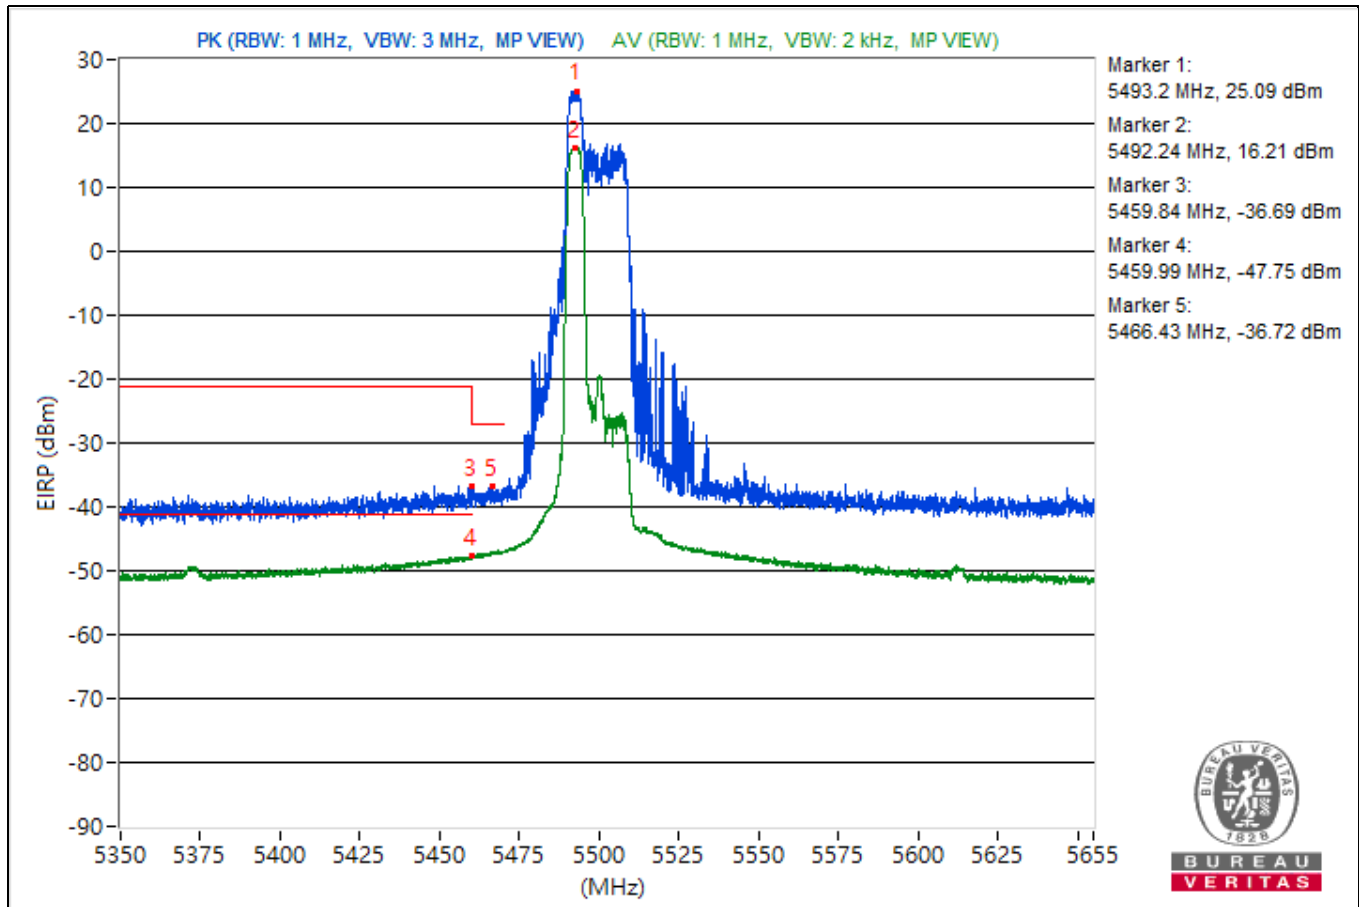


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5706.68	118.12			13.26	16.14	4.92	22.86
2	#5726.68	58.04	68.26	-10.22	-44.19	-46.39	4.92	-37.22

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

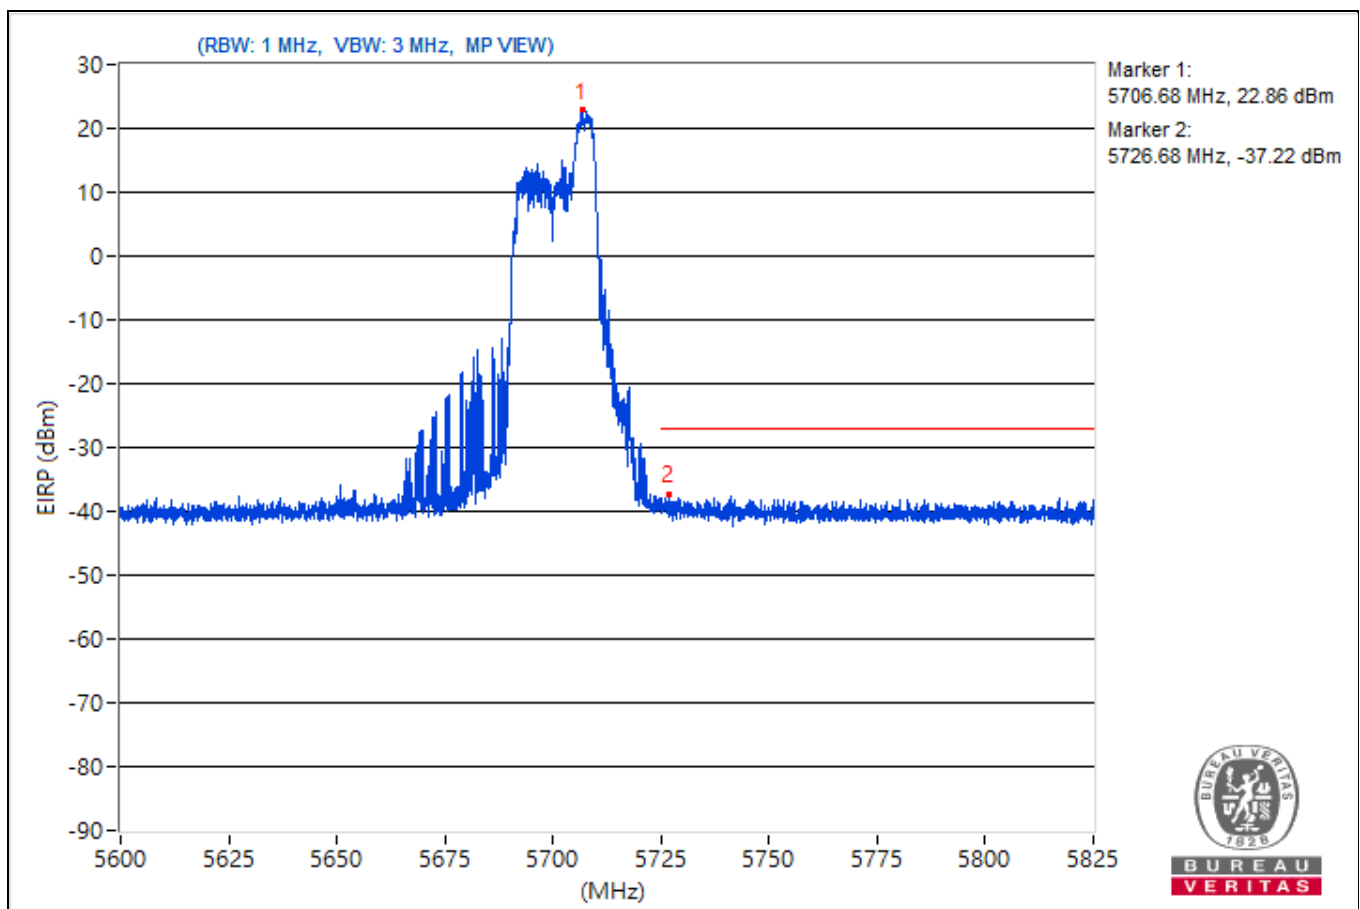


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5727.01	117.01			14.73	12.68	4.92	21.75
2	#5961.97	56.94	68.26	-11.32	-44.48	-49.3	4.92	-38.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

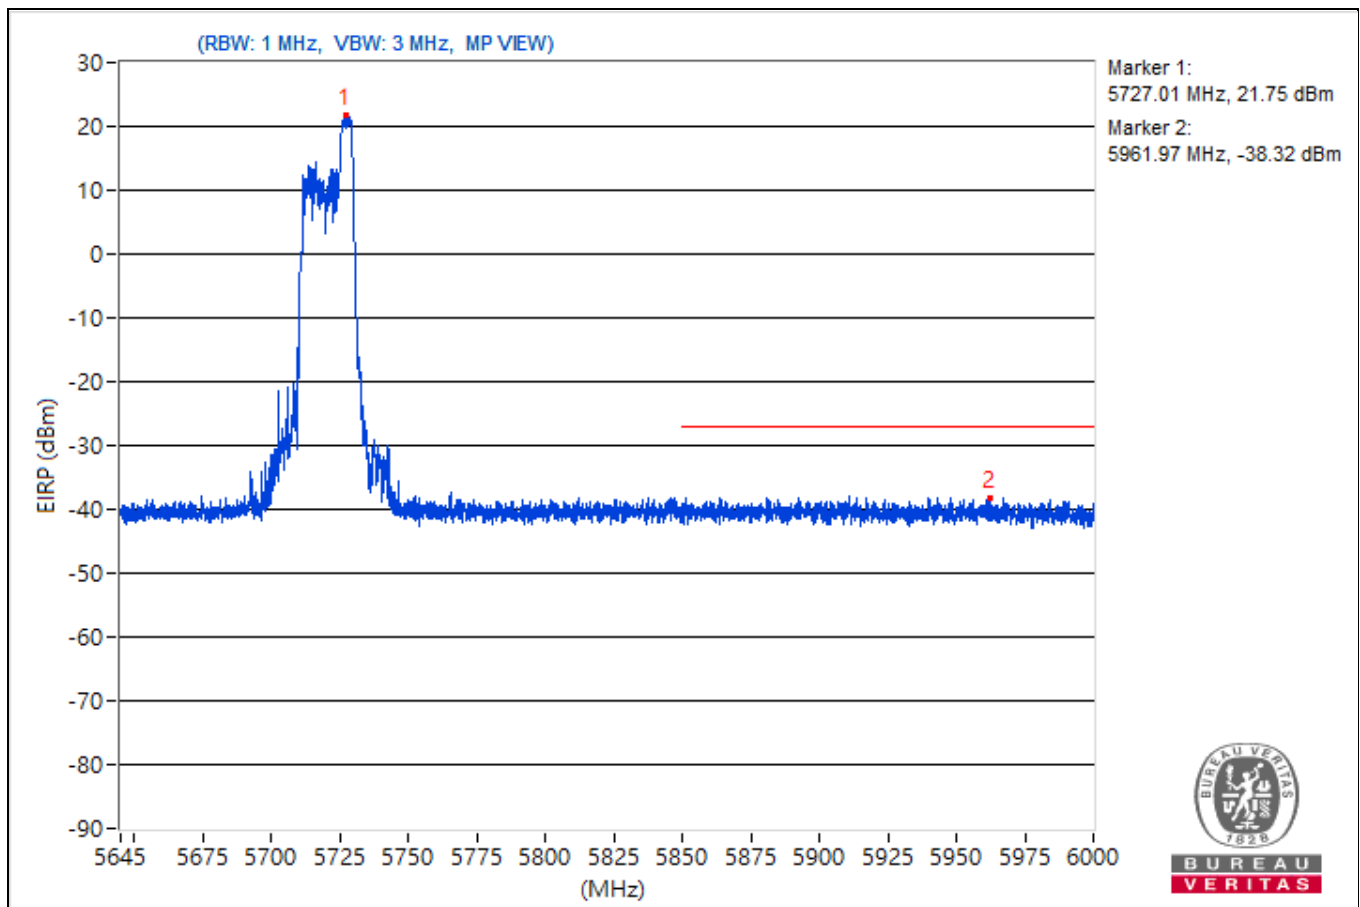


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5736.68	120.49			16.97	17.6	4.92	25.23
2	#5583.61	61.33	68.26	-6.93	-44.29	-40.31	4.92	-33.93
3	#5652.96	61.69	70.45	-8.76	-42.12	-40.97	4.92	-33.57
4	#5699.98	60.54	105.25	-44.71	-41.62	-44.01	4.92	-34.72
5	#5720.64	61.04	112.33	-51.29	-43.18	-41.32	4.92	-34.22
6	#5854.71	59.23	111.52	-52.29	-43.77	-44.16	4.92	-36.03
7	#5873.95	60.29	105.55	-45.26	-43.99	-42.03	4.92	-34.97
8	#5924.42	59.99	68.69	-8.7	-43.55	-42.88	4.92	-35.27
9	#6007.31	61	68.26	-7.26	-40.85	-44.12	4.92	-34.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

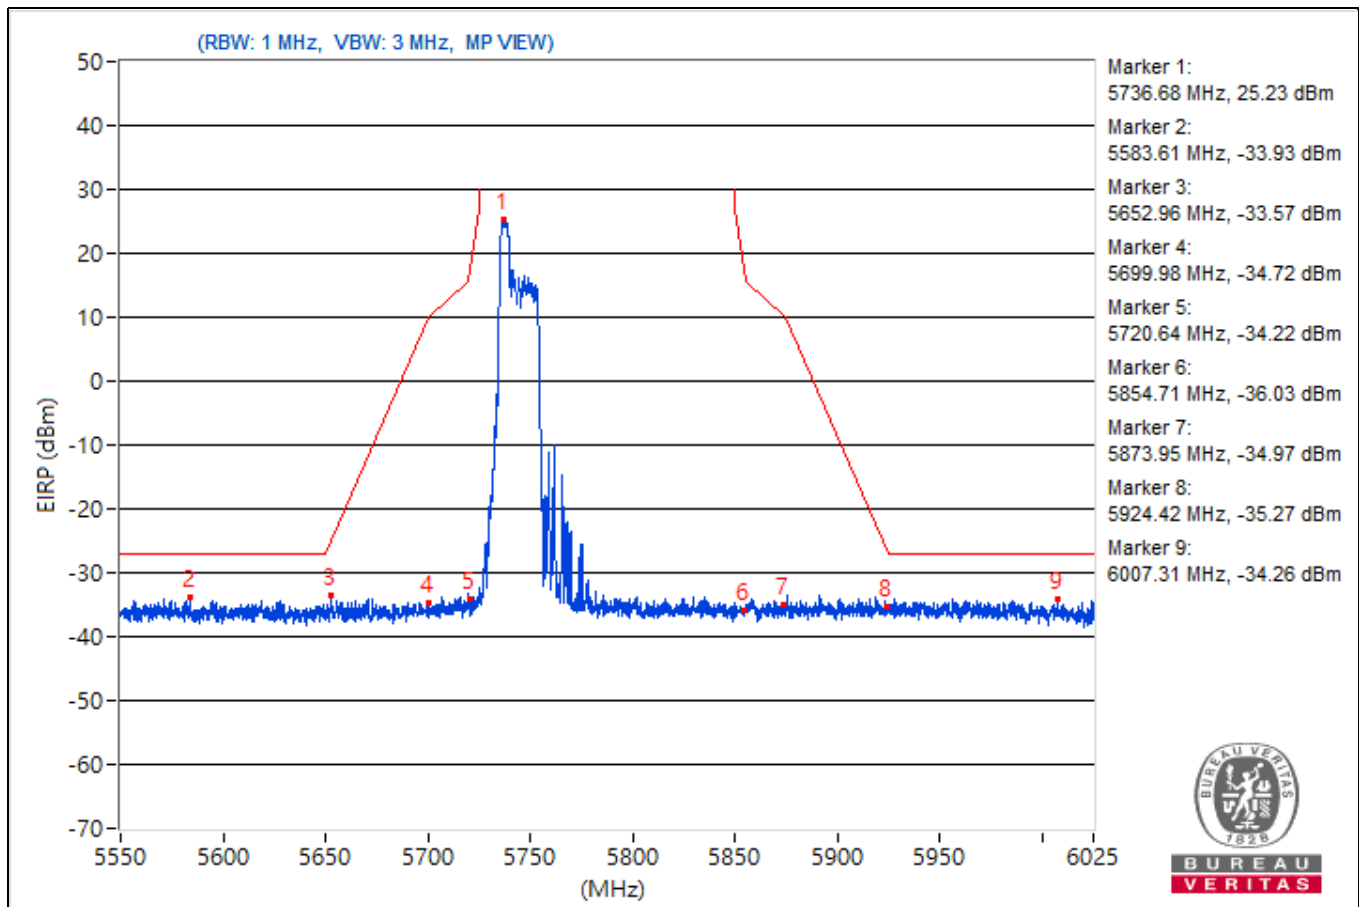


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5833.57	121.34			19.26	16.65	4.92	26.08
2	#5585.62	60.76	68.26	-7.5	-40.9	-44.82	4.92	-34.5
3	#5652.6	60.34	70.18	-9.84	-43.53	-42.25	4.92	-34.92
4	#5701.64	59.68	105.72	-46.04	-44.54	-42.69	4.92	-35.58
5	#5720.41	60.81	111.79	-50.98	-42.42	-42.34	4.92	-34.45
6	#5854.83	60.55	111.24	-50.69	-42.27	-43.05	4.92	-34.71
7	#5874.66	61.6	105.35	-43.75	-42.35	-40.95	4.92	-33.66
8	#5923.23	60.49	69.57	-9.08	-44.16	-41.61	4.92	-34.77
9	#5939.98	61.75	68.26	-6.51	-41.07	-41.83	4.92	-33.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

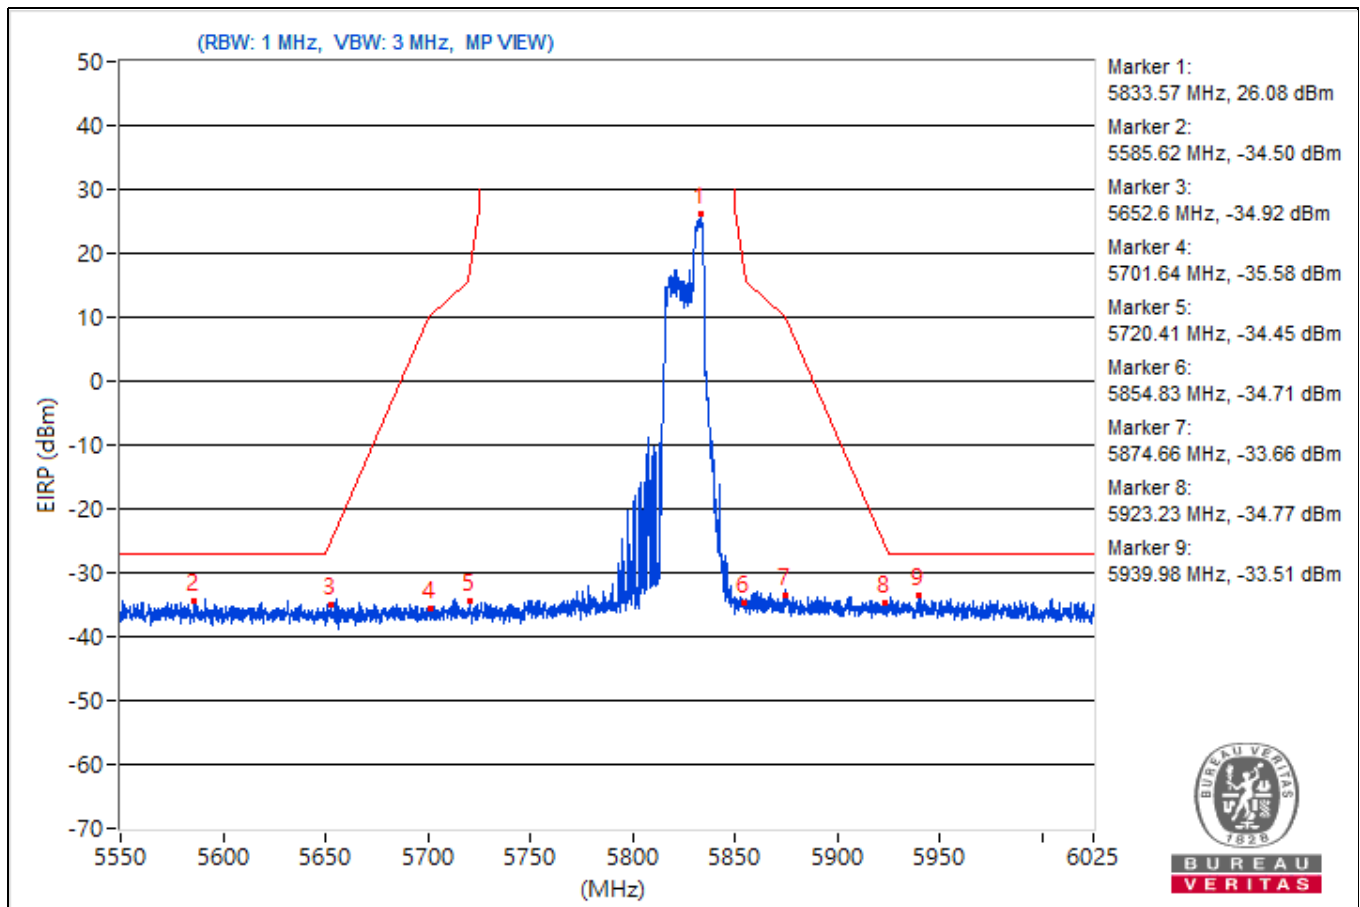


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5176.52	120.52 PK			17.38	17.28	4.92	25.26
2	*5176.52	111.32 AV			7.92	8.33	4.92	16.06
3	5149.26	61.17 PK	74	-12.83	-42.5	-41.59	4.92	-34.09
4	5149.26	51.53 AV	54	-2.47	-51.36	-52	4.92	-43.73

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

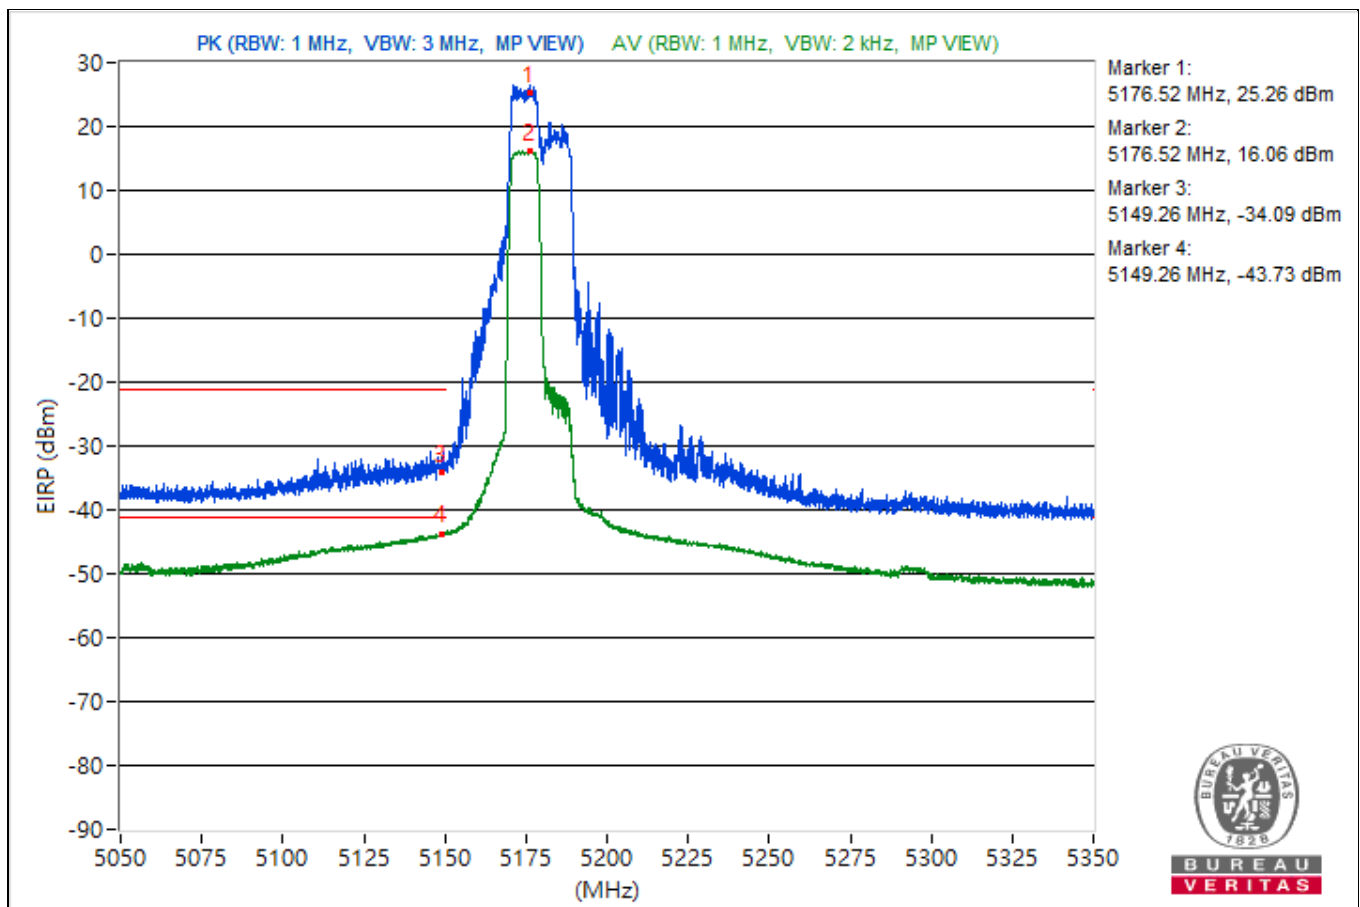


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5323.89	115.37 PK			11.85	12.48	4.92	20.11
2	*5323.89	108.61 AV			5.27	5.56	4.92	13.35
3	5350.1	54.94 PK	74	-19.06	-48.49	-48.02	4.92	-40.32
4	5350.1	48.19 AV	54	-5.81	-54.75	-55.27	4.92	-47.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

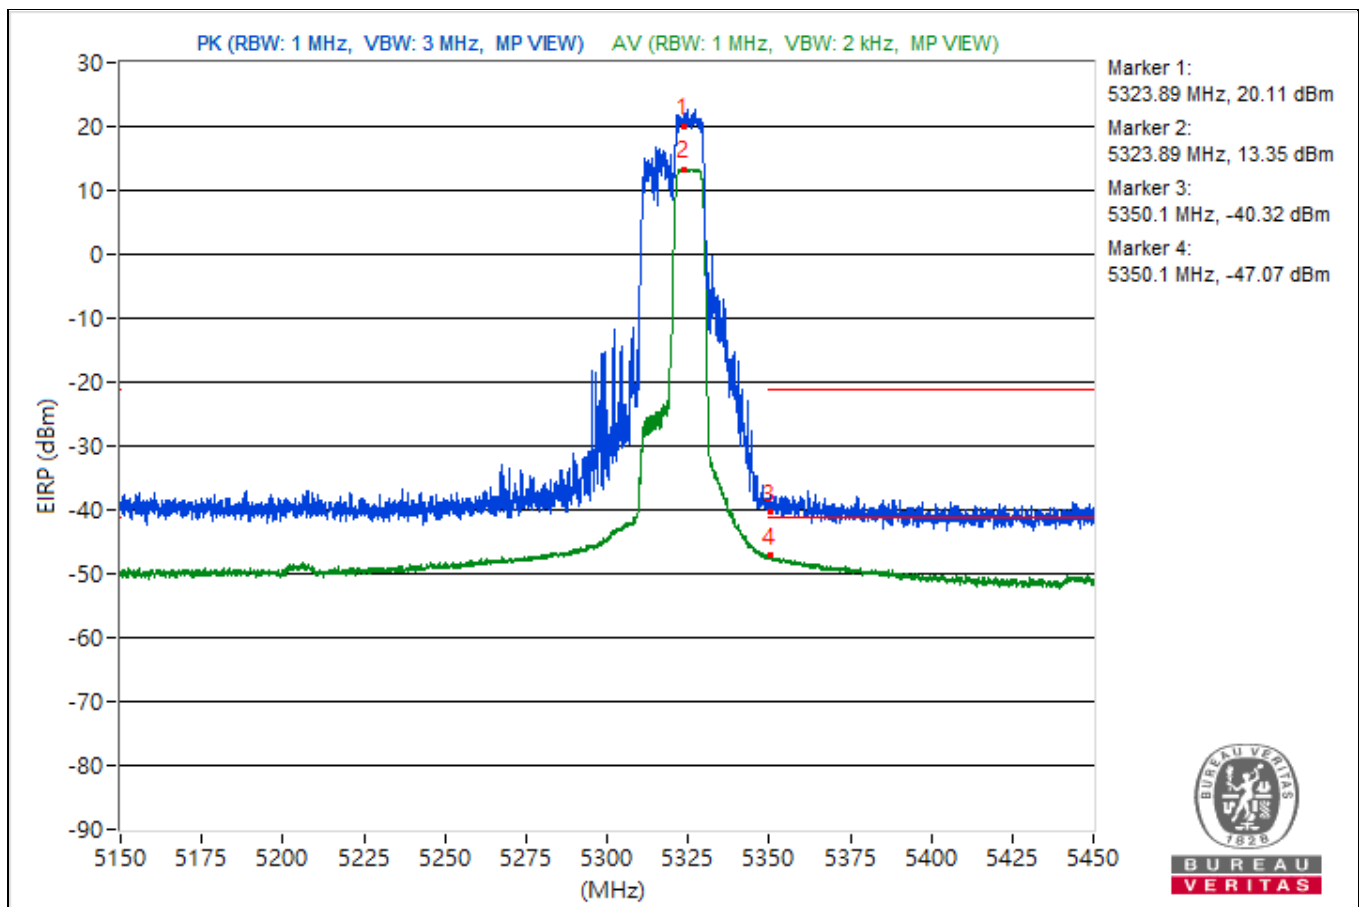


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5496.55	119.51 PK			14.65	17.52	4.92	24.25
2	*5494.04	110.31 AV			6.85	7.38	4.92	15.05
3	5456.48	59.17 PK	74	-14.83	-42.38	-46.67	4.92	-36.09
4	5459.46	48.71 AV	54	-5.29	-54.23	-54.75	4.92	-46.55
5	#5468.65	60.58 PK	68.26	-7.68	-42.5	-42.73	4.92	-34.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

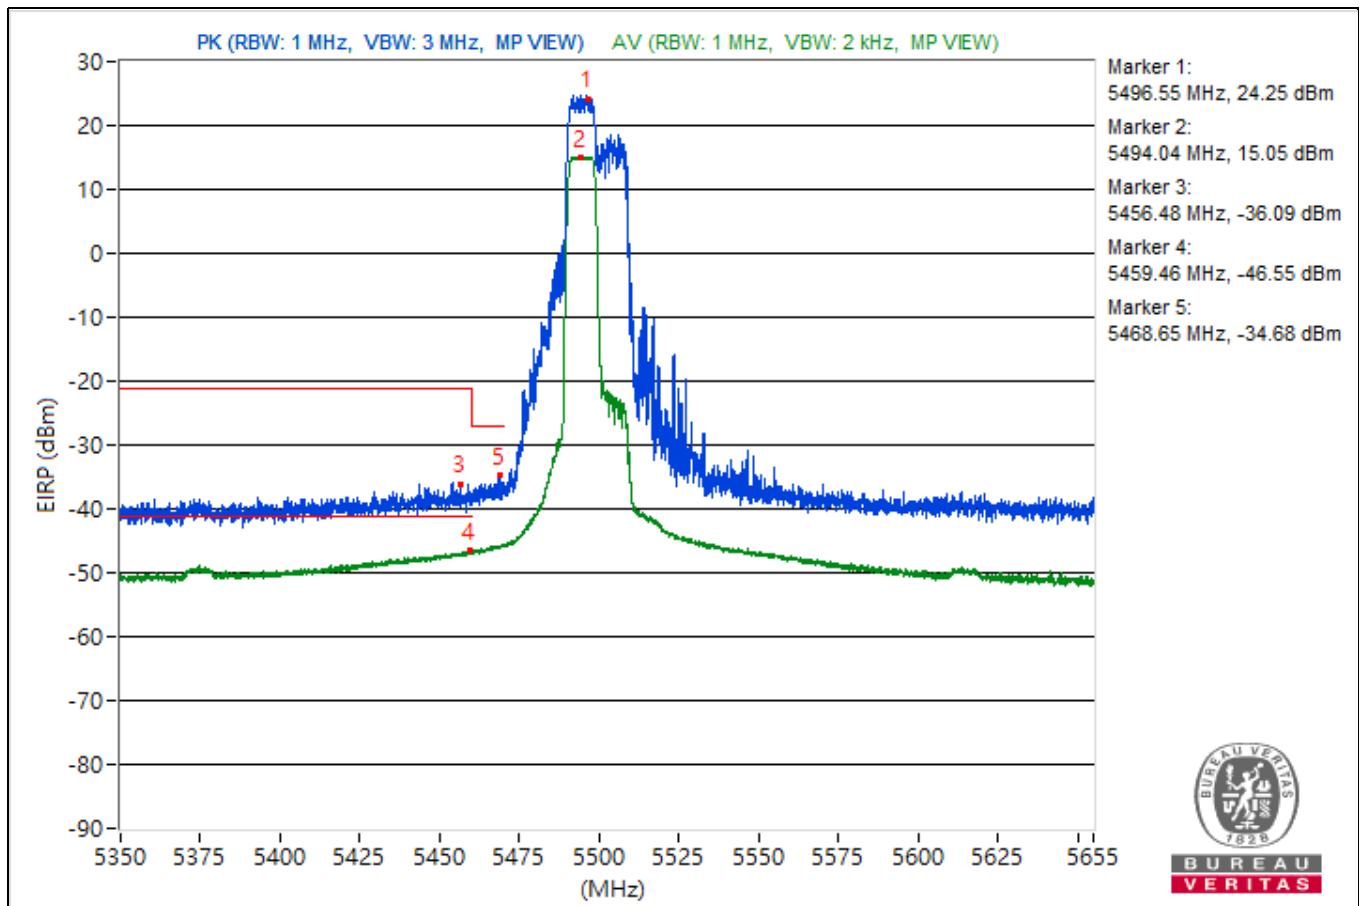


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5702.04	120.6			15.73	18.62	4.92	25.34
2	#5725.21	61.41	68.26	-6.85	-40.79	-43.08	4.92	-33.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

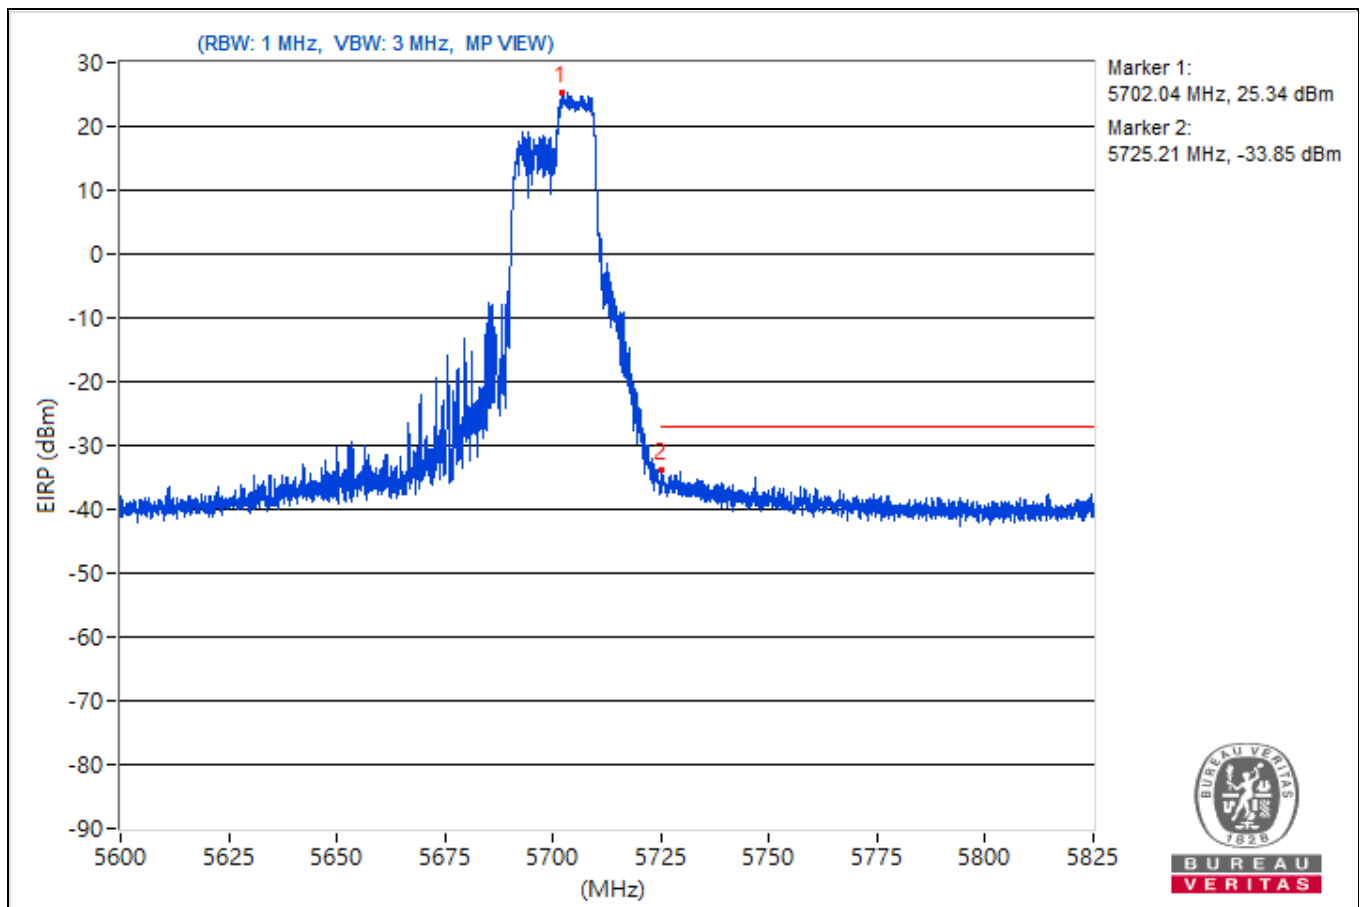


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.86	121.1			17.69	18.12	4.92	25.84
2	#5873.27	57.25	68.26	-11.01	-48.51	-44.33	4.92	-38.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

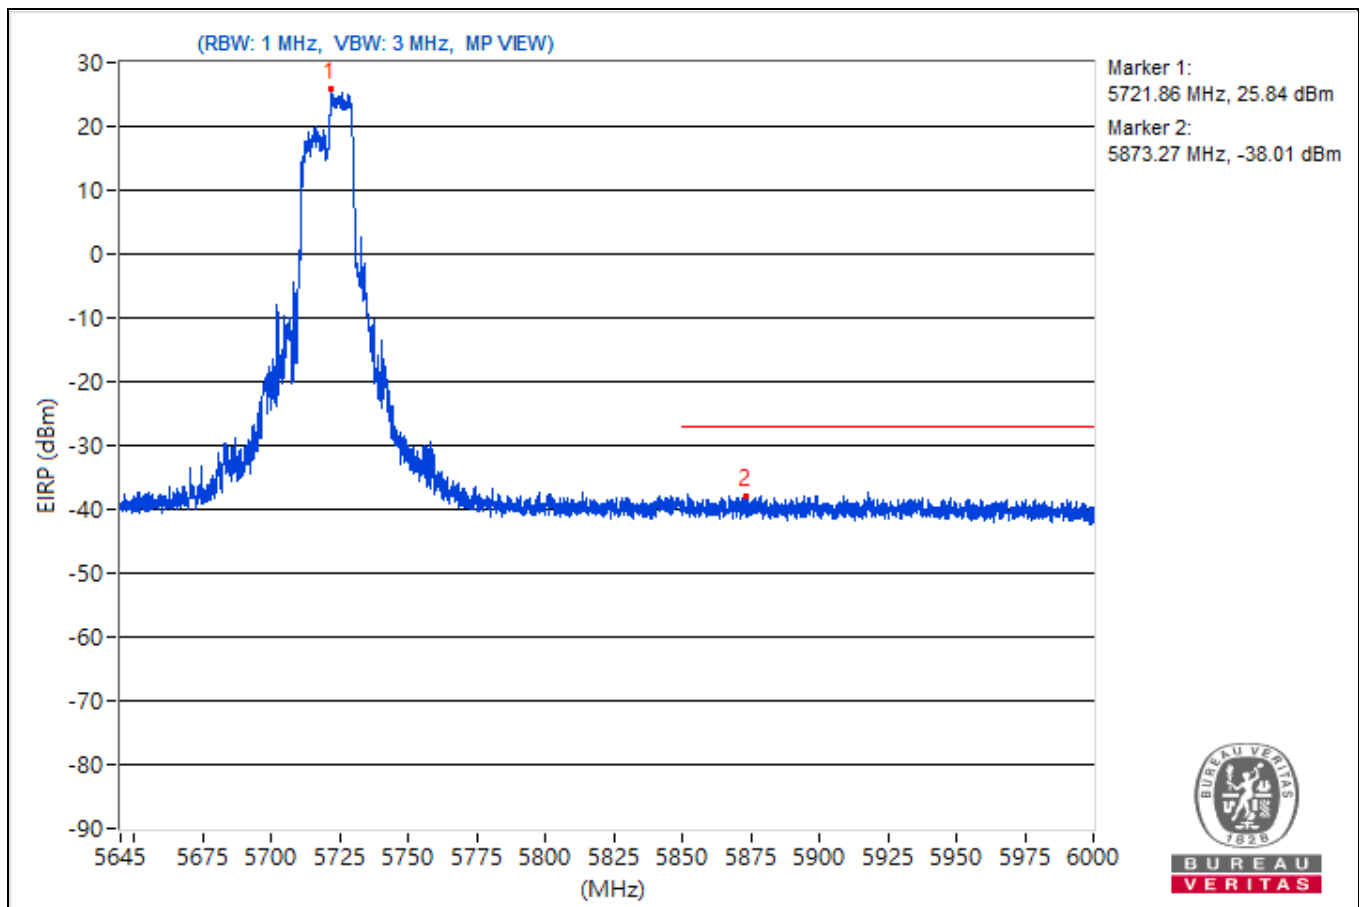


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5737.98	124.03			22.13	19	4.92	28.77
2	#5620.18	61.58	68.26	-6.68	-40.78	-42.63	4.92	-33.68
3	#5652.96	61.62	70.45	-8.83	-40.33	-43.33	4.92	-33.64
4	#5715.18	74.37	109.51	-35.14	-27.28	-31.22	4.92	-20.89
5	#5720.88	77.11	112.87	-35.76	-27.31	-25.13	4.92	-18.15
6	#5854.12	61.29	112.87	-51.58	-41.3	-42.6	4.92	-33.97
7	#5874.19	61.08	105.49	-44.41	-41.16	-43.33	4.92	-34.18
8	#5923.59	60.29	69.31	-9.02	-44.31	-41.83	4.92	-34.97
9	#5940.69	61.29	68.26	-6.97	-44.95	-40.12	4.92	-33.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

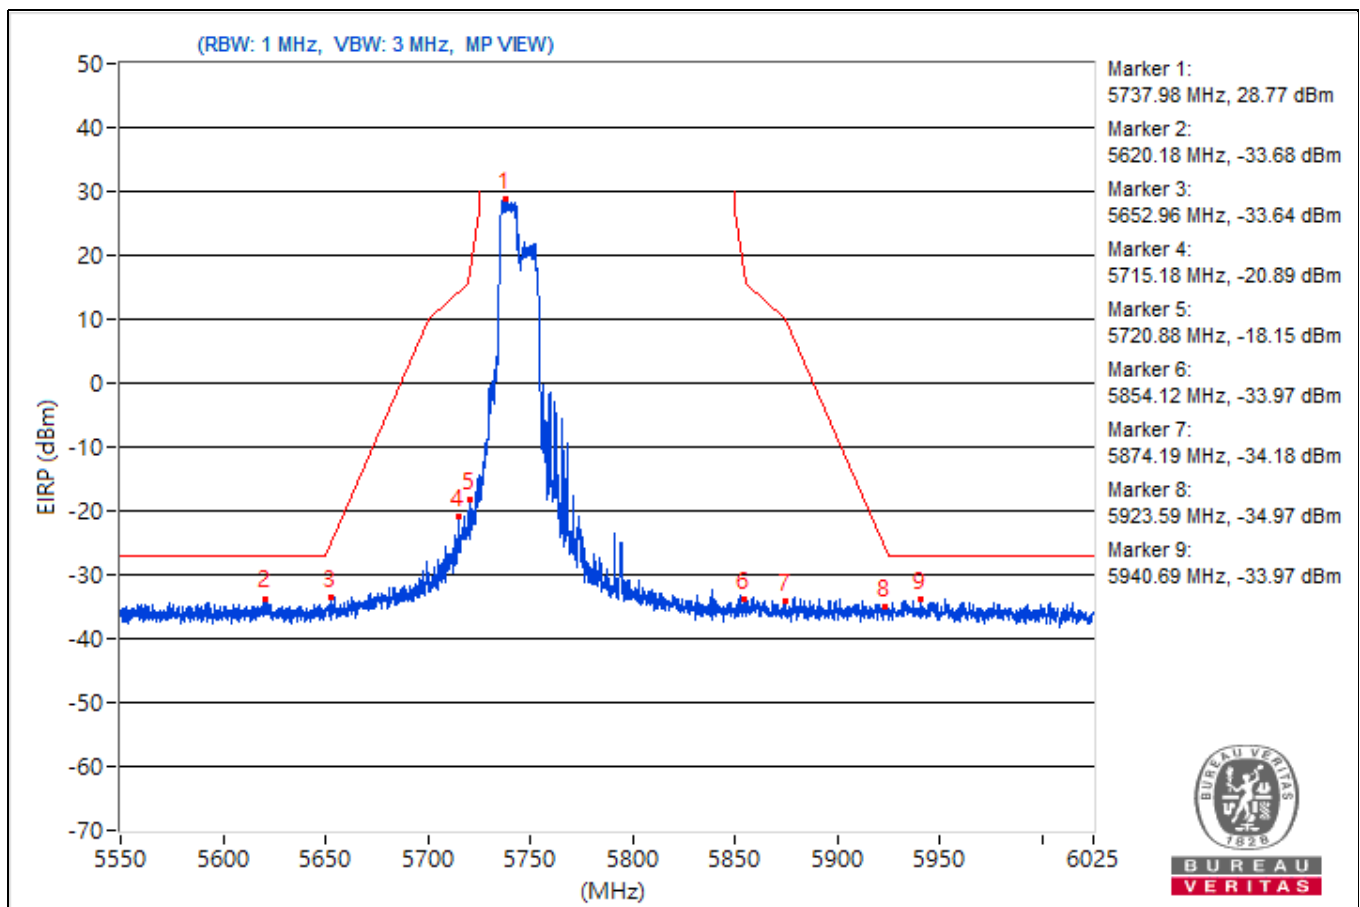


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5829.18	123.62			18.87	21.58	4.92	28.36
2	#5595.24	60.42	68.26	-7.84	-44.26	-41.67	4.92	-34.84
3	#5650.23	59.82	68.43	-8.61	-43.83	-42.95	4.92	-35.44
4	#5707.58	60.77	107.38	-46.61	-43.79	-41.38	4.92	-34.49
5	#5720.05	59.04	110.97	-51.93	-44.39	-43.93	4.92	-36.22
6	#5854.83	72.21	111.24	-39.03	-30.98	-30.98	4.92	-23.05
7	#5861.72	71.62	108.98	-37.36	-30.24	-33.5	4.92	-23.64
8	#5922.4	61.4	70.18	-8.78	-46.1	-39.67	4.92	-33.86
9	#5953.87	62.17	68.26	-6.09	-41.68	-40.44	4.92	-33.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

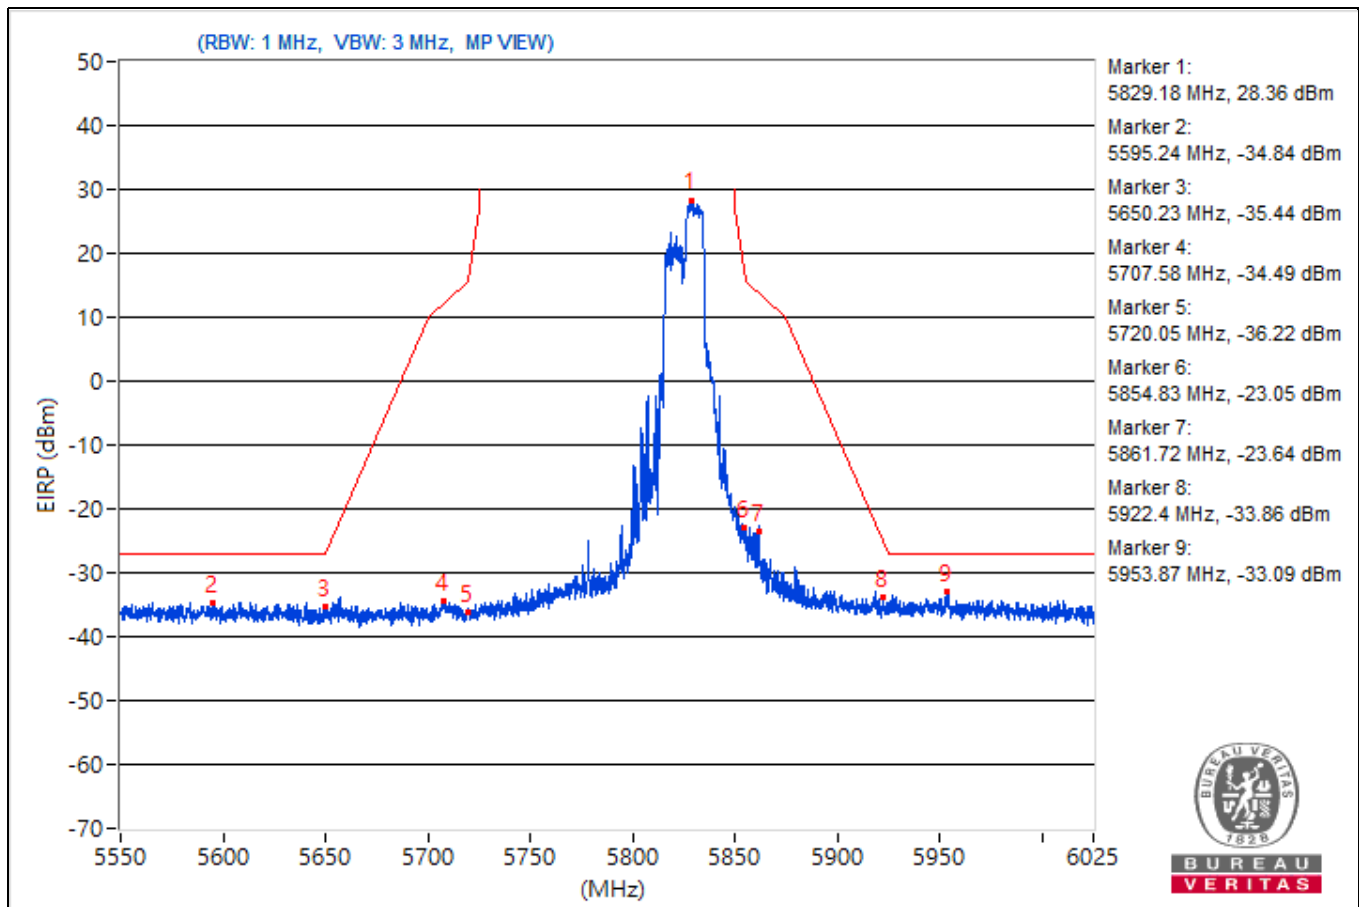


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5175.62	119.17 PK			16.46	15.45	4.92	23.91
2	*5175.62	110.81 AV			8.1	7.08	4.92	15.55
3	5147.61	60.11 PK	74	-13.89	-41.8	-44.9	4.92	-35.15
4	5147.61	49.01 AV	54	-4.99	-53.55	-54.91	4.92	-46.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

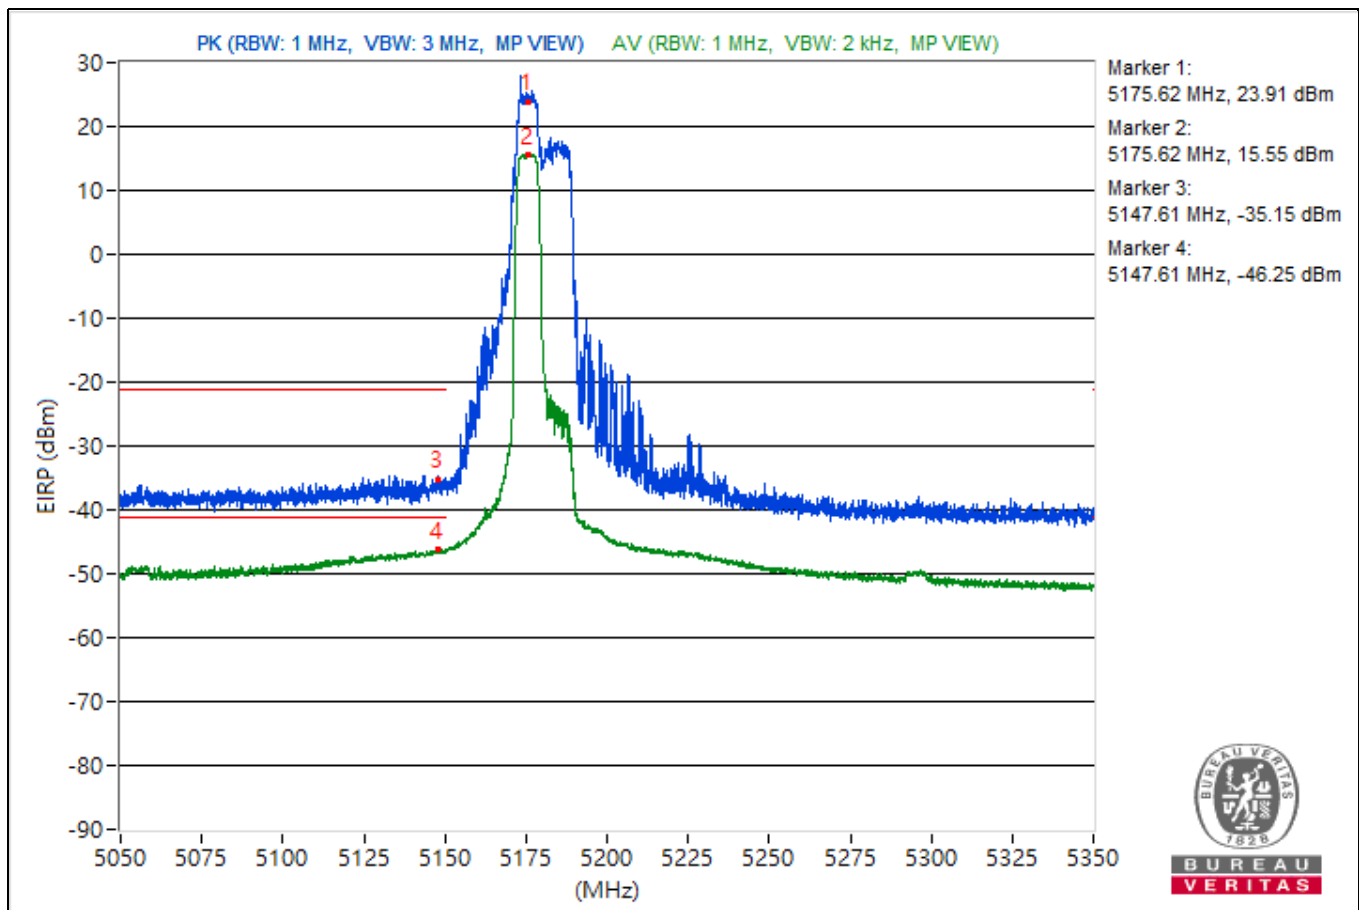


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5322.73	118.84 PK			16.53	14.54	4.92	23.58
2	*5322.73	111.15 AV			8.12	7.78	4.92	15.89
3	5350.7	58.08 PK	74	-15.92	-45.22	-45	4.92	-37.18
4	5350.7	48.3 AV	54	-5.7	-54.21	-55.7	4.92	-46.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

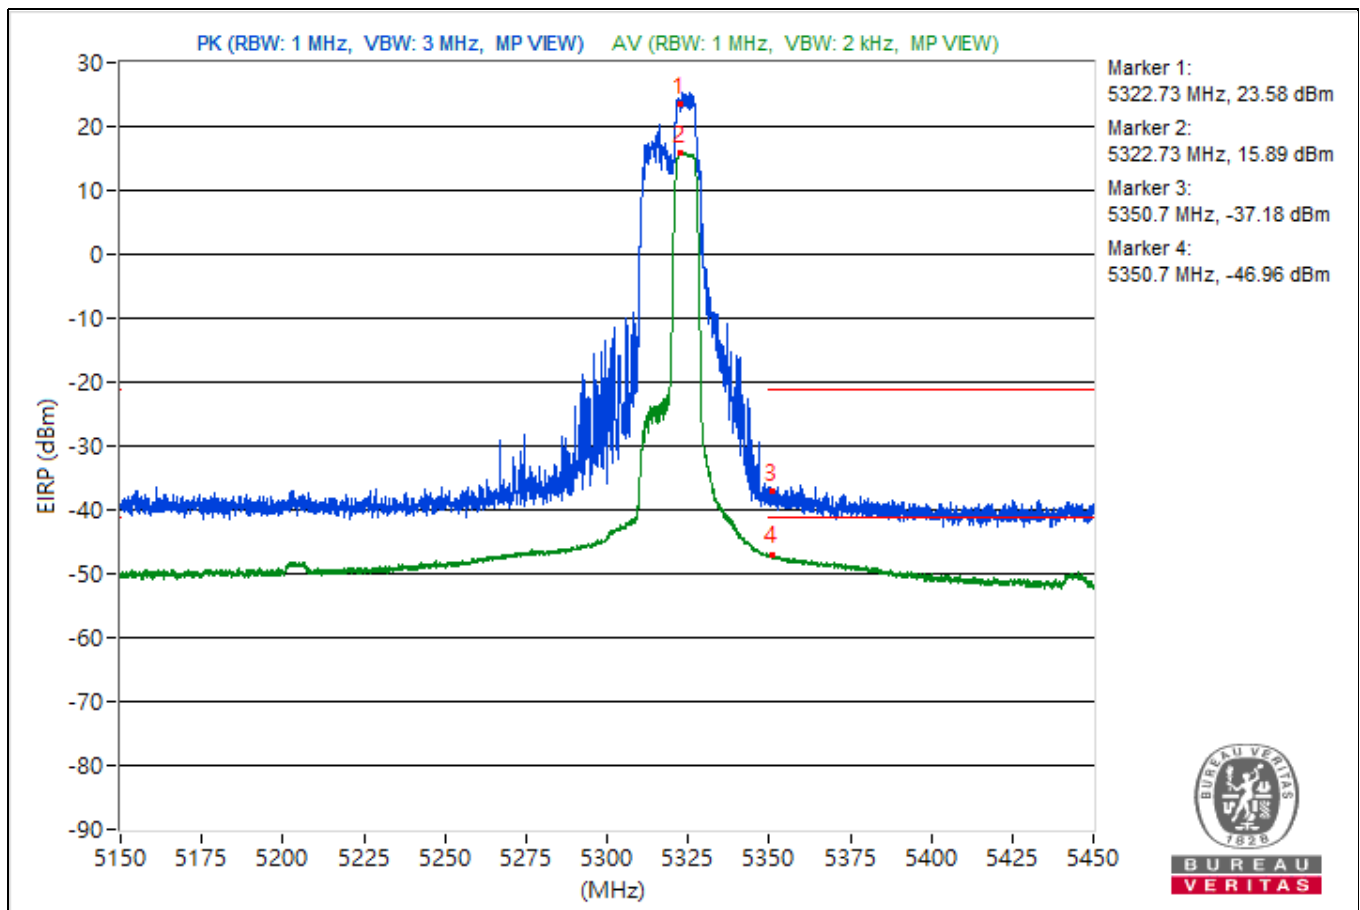


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5494.95	120.68 PK			16.99	17.94	4.92	25.42
2	*5495.56	110.94 AV			7.66	7.83	4.92	15.68
3	5448.67	59.42 PK	74	-14.58	-42.59	-45.39	4.92	-35.84
4	5459.91	48.08 AV	54	-5.92	-54.48	-55.84	4.92	-47.18
5	#5466.74	60.58 PK	68.26	-7.68	-44.14	-41.48	4.92	-34.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

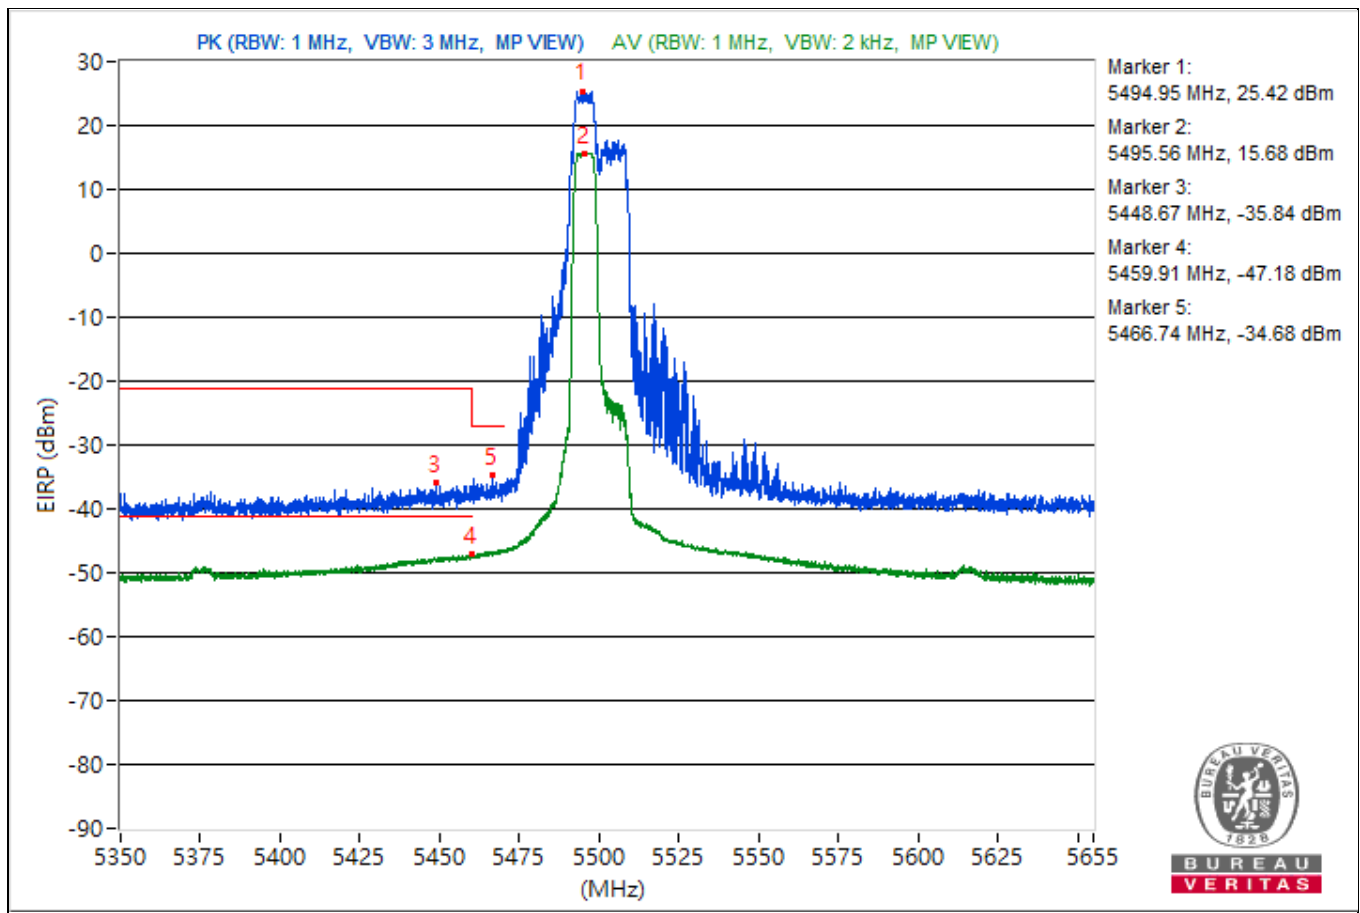


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5705.1	121.16			16.98	18.78	4.92	25.9
2	#5740.29	61.12	68.26	-7.14	-45.26	-40.26	4.92	-34.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

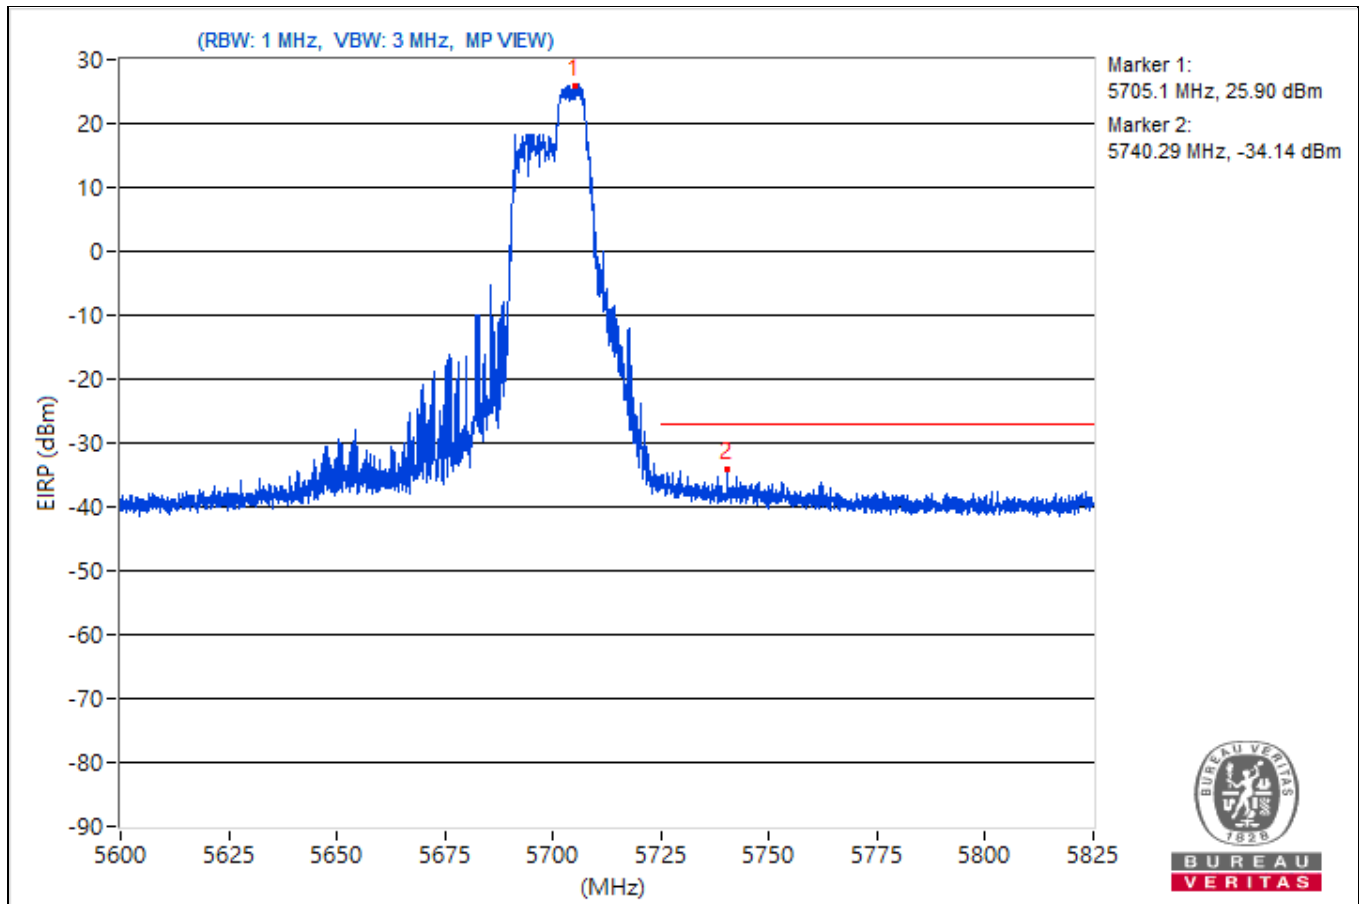


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.9	121.36			19.66	15.88	4.92	26.1
2	#5864.08	57.45	68.26	-10.81	-46.77	-44.91	4.92	-37.81

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

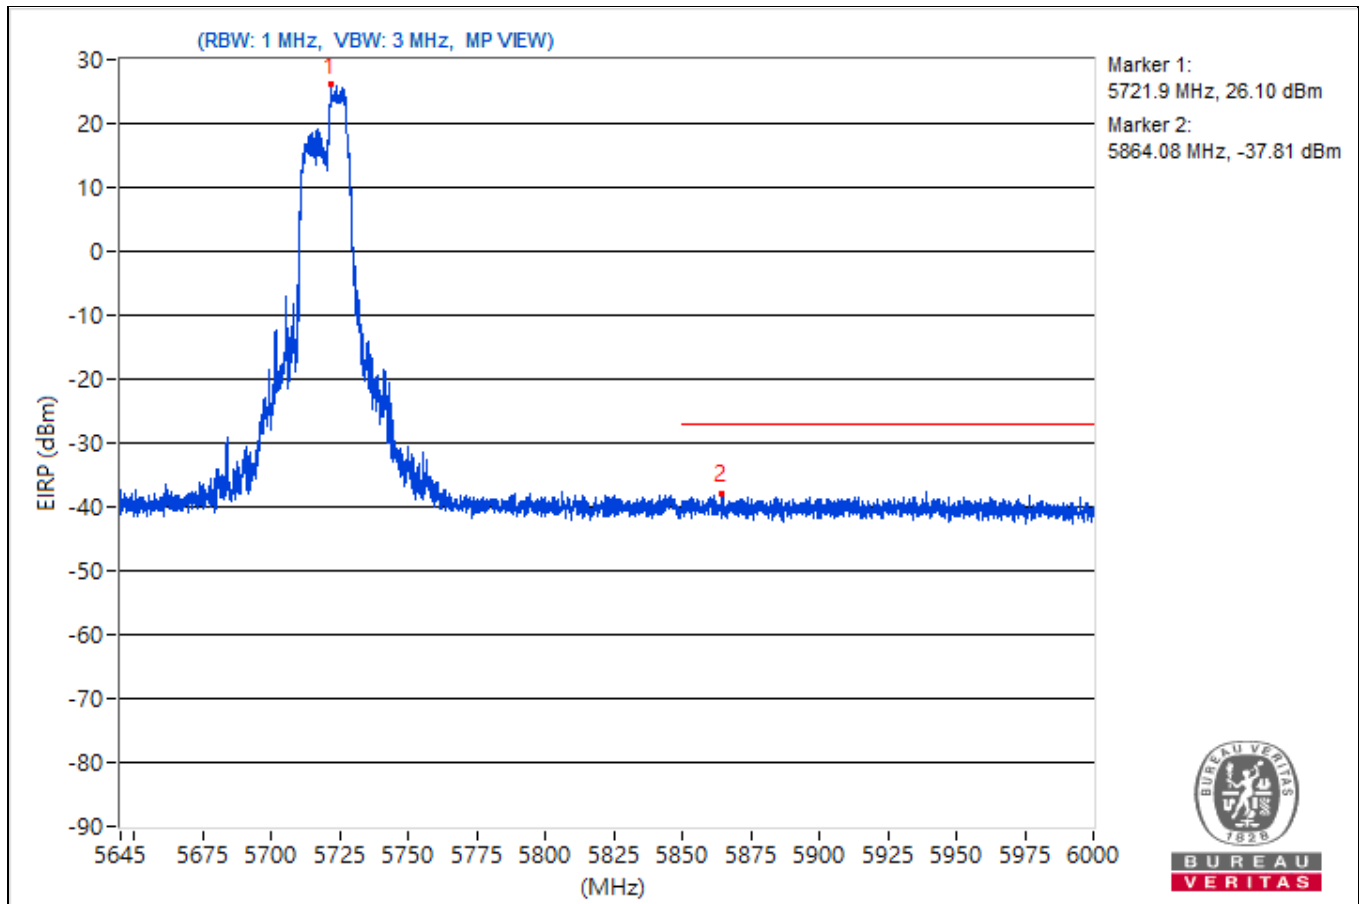


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5740.24	124.15			21.32	20.56	4.92	28.89
2	#5621.13	58.41	68.26	-9.85	-47.78	-43.02	4.92	-36.85
3	#5649.99	56.71	68.26	-11.55	-46.47	-46.48	4.92	-38.55
4	#5714.23	76	109.24	-33.24	-24.68	-33.74	4.92	-19.26
5	#5720.52	73.96	112.06	-38.1	-33.76	-27.06	4.92	-21.3
6	#5854.24	56.44	112.6	-56.16	-46.89	-46.62	4.92	-38.82
7	#5870.74	57.13	106.45	-49.32	-47.09	-45.23	4.92	-38.13
8	#5924.18	56.24	68.87	-12.63	-46.6	-47.34	4.92	-39.02
9	#5926.91	57.71	68.26	-10.55	-44.13	-47.45	4.92	-37.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

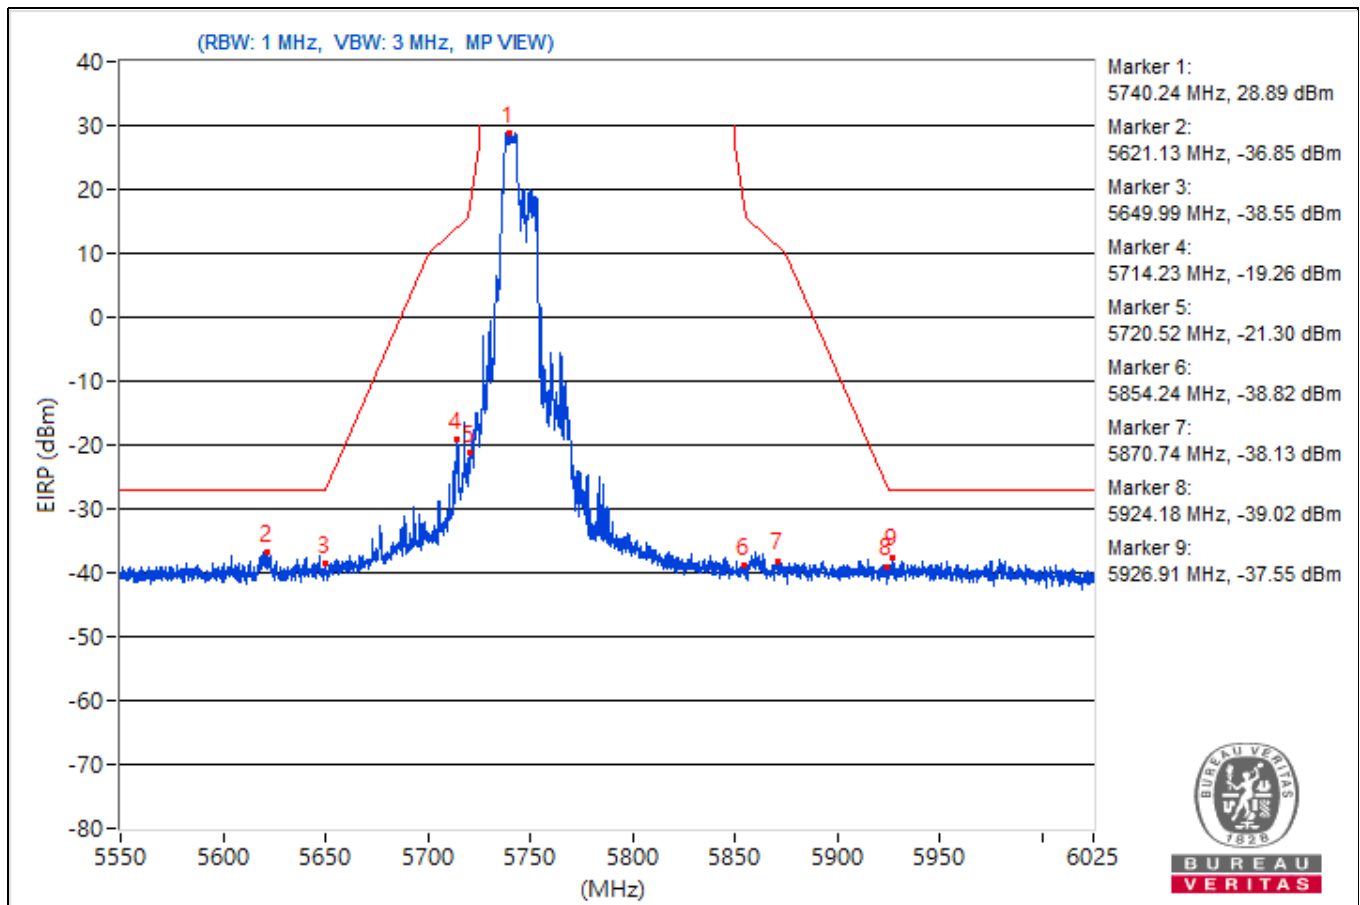


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5828.23	124.52			20.85	21.76	4.92	29.26
2	#5572.56	57.04	68.26	-11.22	-45.01	-47.71	4.92	-38.22
3	#5650.23	56	68.43	-12.43	-46.74	-47.69	4.92	-39.26
4	#5707.82	57.95	107.45	-49.5	-44.9	-45.62	4.92	-37.31
5	#5720.41	55.25	111.79	-56.54	-48.64	-47.34	4.92	-40.01
6	#5852.46	79.52	116.66	-37.14	-20.94	-32.64	4.92	-15.74
7	#5855.43	76.22	110.74	-34.52	-32.97	-24.55	4.92	-19.04
8	#5923.47	57.09	69.39	-12.3	-46.86	-45.46	4.92	-38.17
9	#5946.62	59.54	68.26	-8.72	-42.83	-44.67	4.92	-35.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

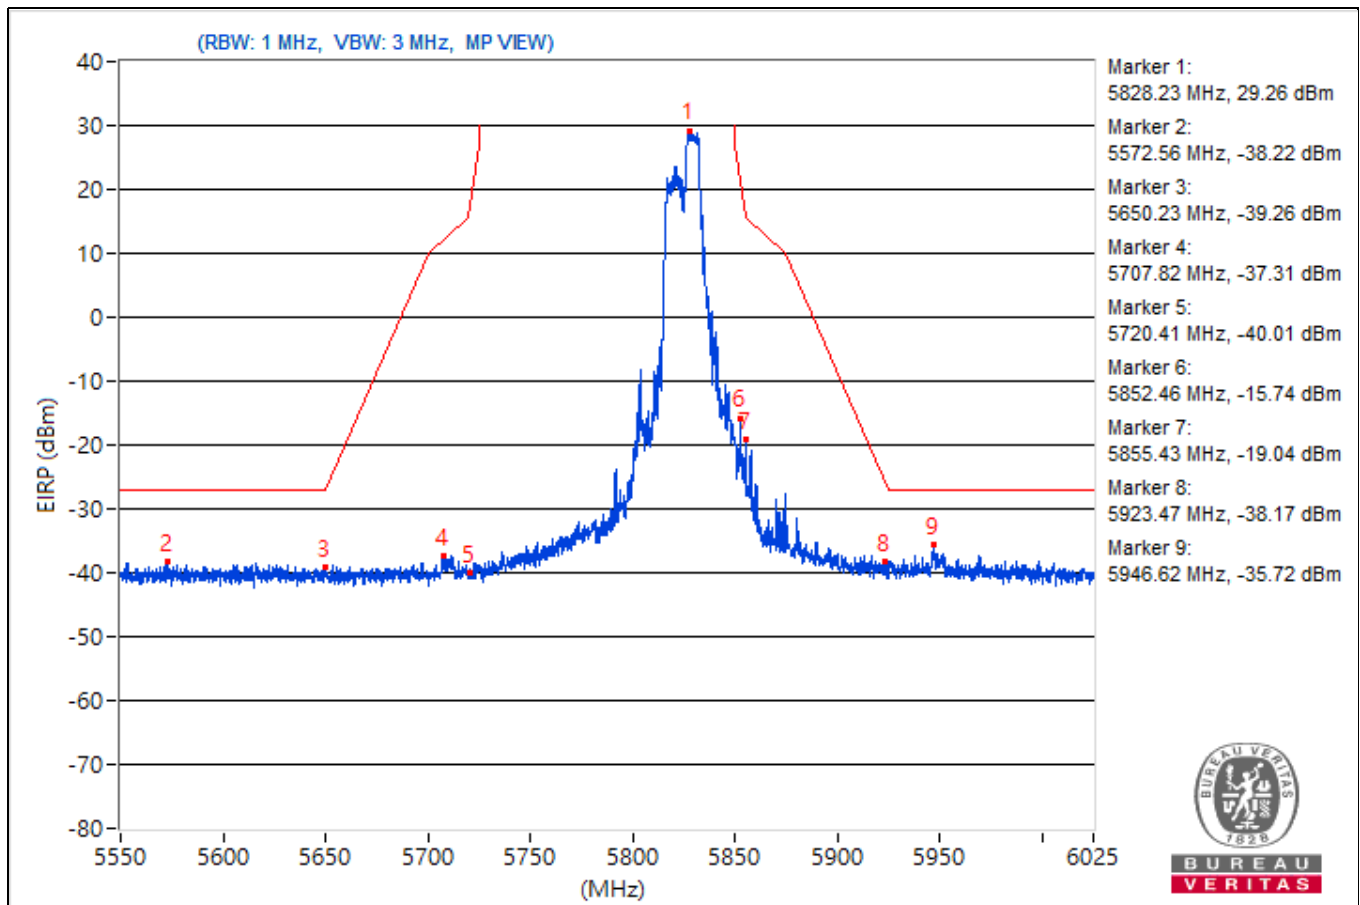


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5178.66	118.36 PK			16.07	14.04	4.92	23.1
2	*5178.66	109.39 AV			6.44	5.94	4.92	14.13
3	5149.82	58.69 PK	74	-15.31	-44.12	-44.93	4.92	-36.57
4	5149.82	49.24 AV	54	-4.76	-53.48	-54.48	4.92	-46.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

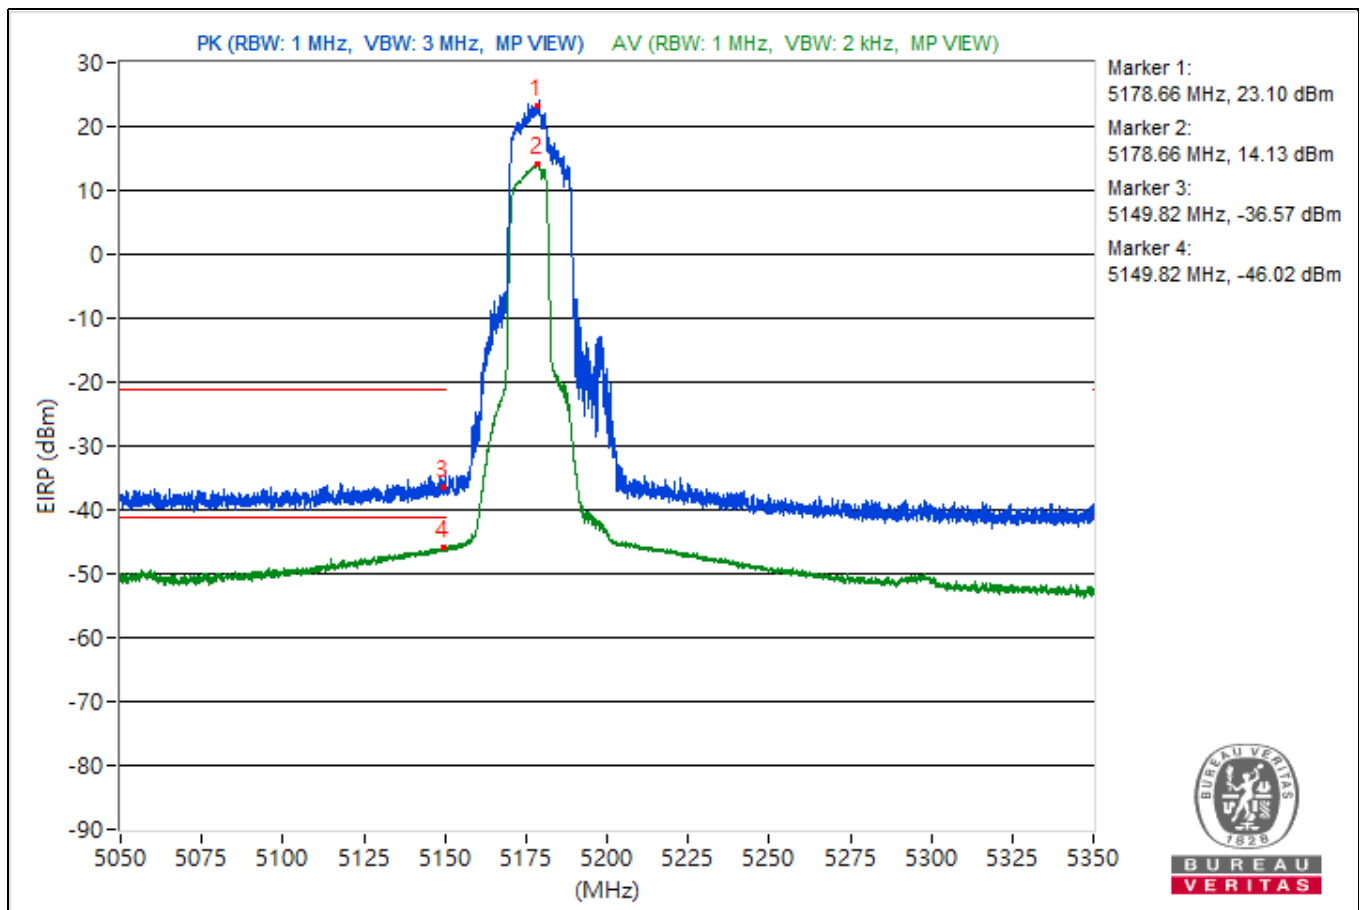


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5321.15	118.12 PK			14.43	15.37	4.92	22.86
2	*5321.15	109.78 AV			6.88	6.27	4.92	14.52
3	5350.7	57.4 PK	74	-16.6	-46.98	-44.86	4.92	-37.86
4	5350.7	48.7 AV	54	-5.3	-53.83	-55.27	4.92	-46.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

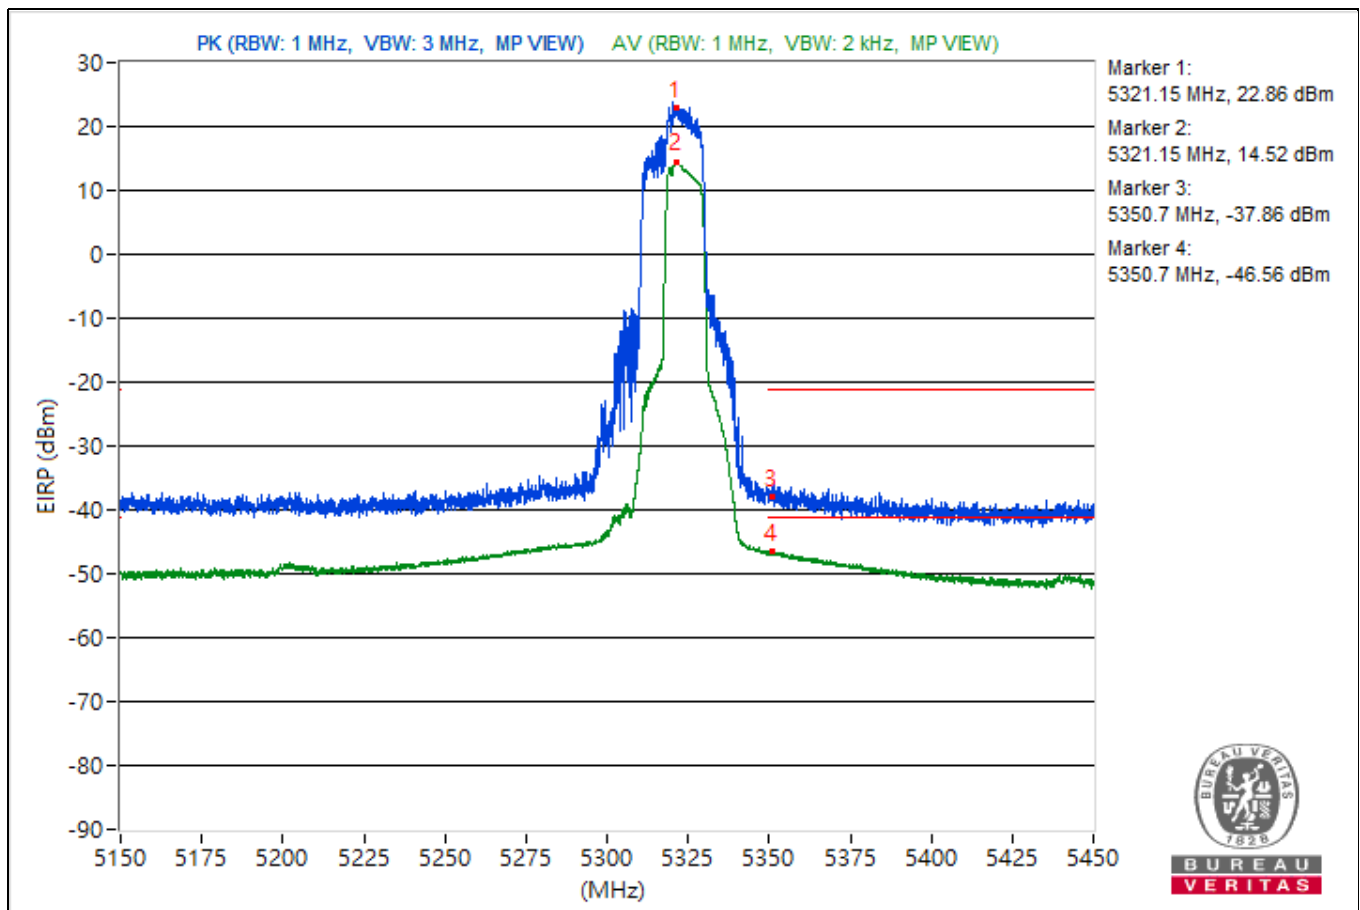


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5498.53	120.7 PK			19.04	15.13	4.92	25.44
2	*5498.99	110.72 AV			7.62	7.43	4.92	15.46
3	5444.17	59.42 PK	74	-14.58	-42.26	-46.1	4.92	-35.84
4	5459.91	49.5 AV	54	-4.5	-53.4	-53.99	4.92	-45.76
5	#5469.06	60.72 PK	68.26	-7.54	-41.05	-44.61	4.92	-34.54

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

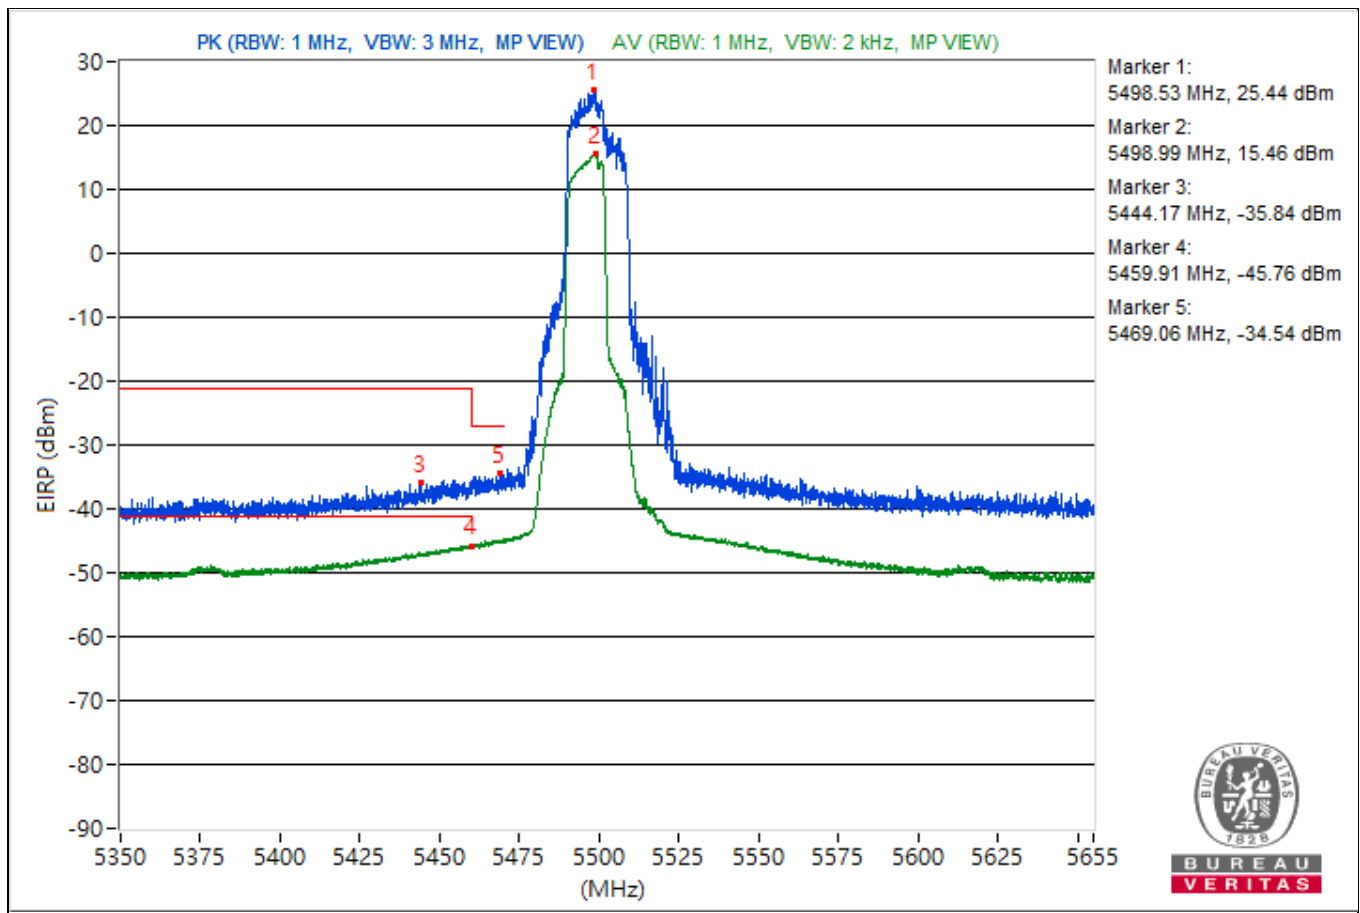


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.6 GHz ~ 5.825 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5700.94	121.2			16.28	19.24	4.92	25.94
2	#5738.94	60.63	68.26	-7.63	-45.92	-40.69	4.92	-34.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

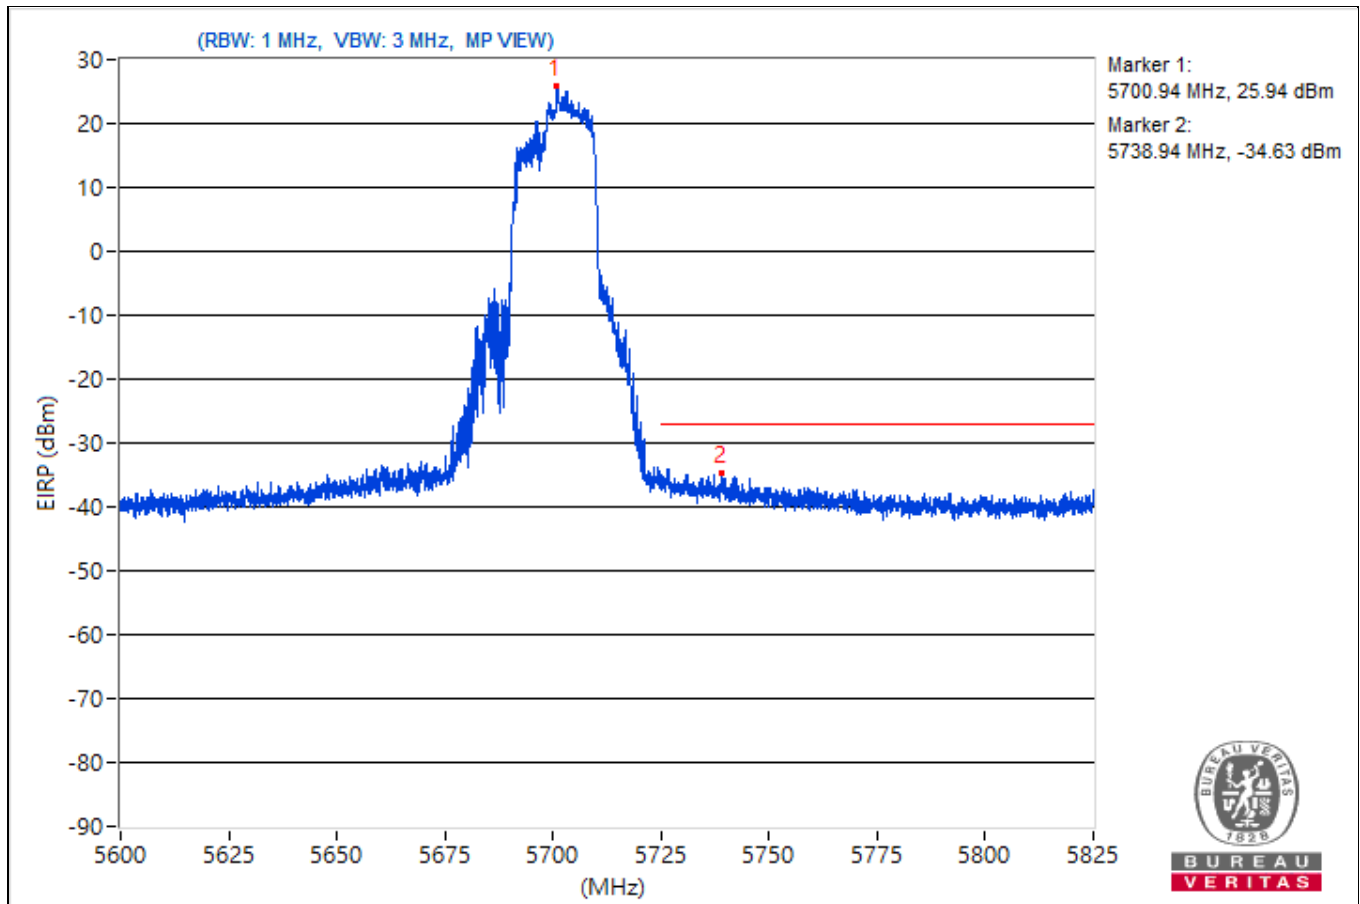


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.28	120.56			15.6	18.62	4.92	25.3
2	#5853.83	57.24	68.26	-11.02	-47.84	-44.63	4.92	-38.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

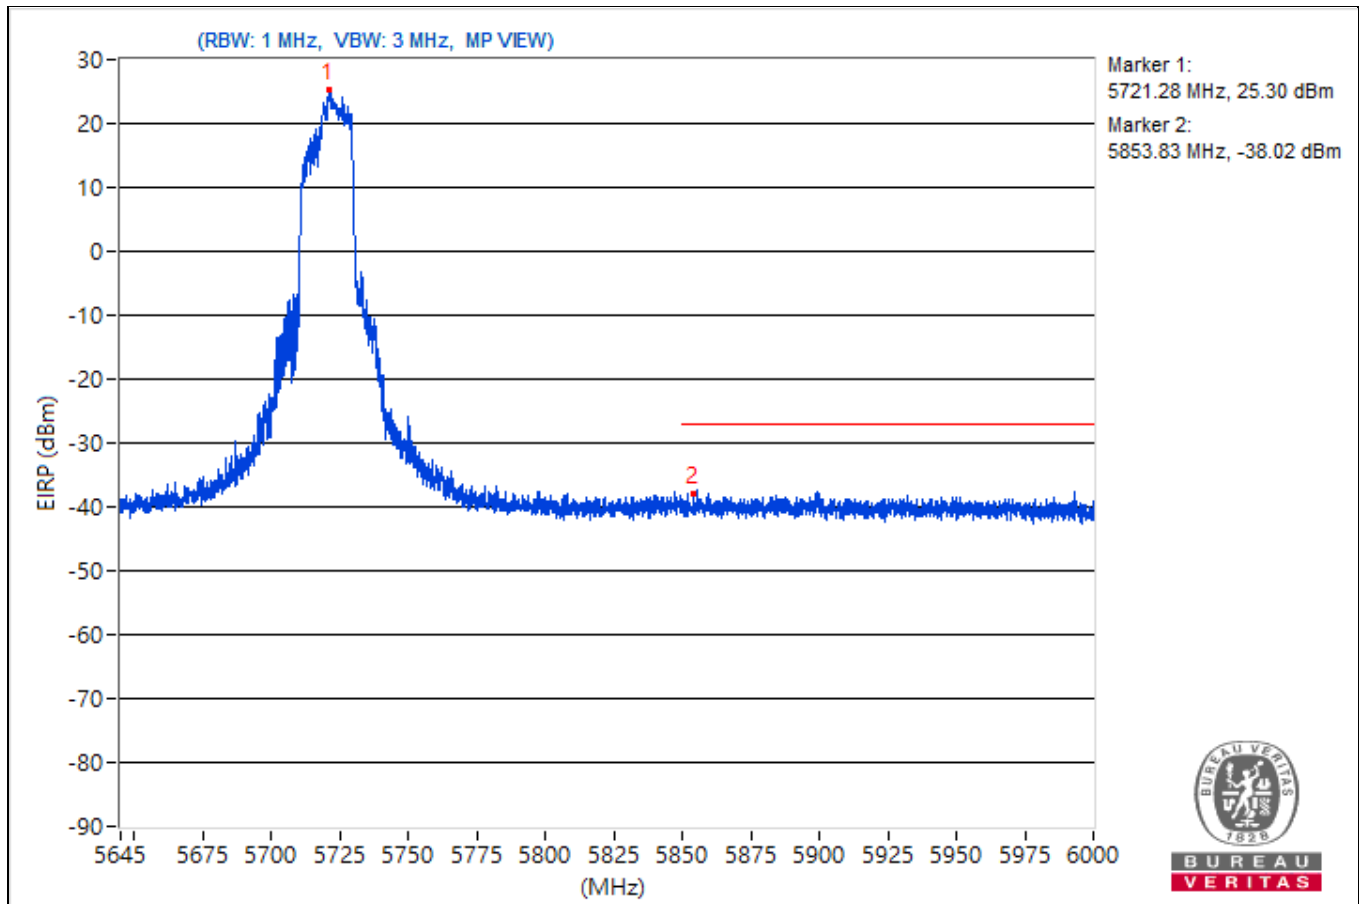


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5741.54	122.43			18.25	20.04	4.92	27.17
2	#5625.76	58.03	68.26	-10.23	-45.87	-44.55	4.92	-37.23
3	#5650.58	56.98	68.69	-11.71	-46.42	-46.02	4.92	-38.28
4	#5719.81	75.42	110.81	-35.39	-26.4	-29.8	4.92	-19.84
5	#5720.17	78.47	111.24	-32.77	-23.08	-27.4	4.92	-16.79
6	#5854.83	55.76	111.24	-55.48	-47.6	-47.25	4.92	-39.5
7	#5874.78	57.48	105.32	-47.84	-45.56	-45.86	4.92	-37.78
8	#5924.77	56.77	68.43	-11.66	-46.41	-46.43	4.92	-38.49
9	#5944.13	58.13	68.26	-10.13	-44.3	-45.98	4.92	-37.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

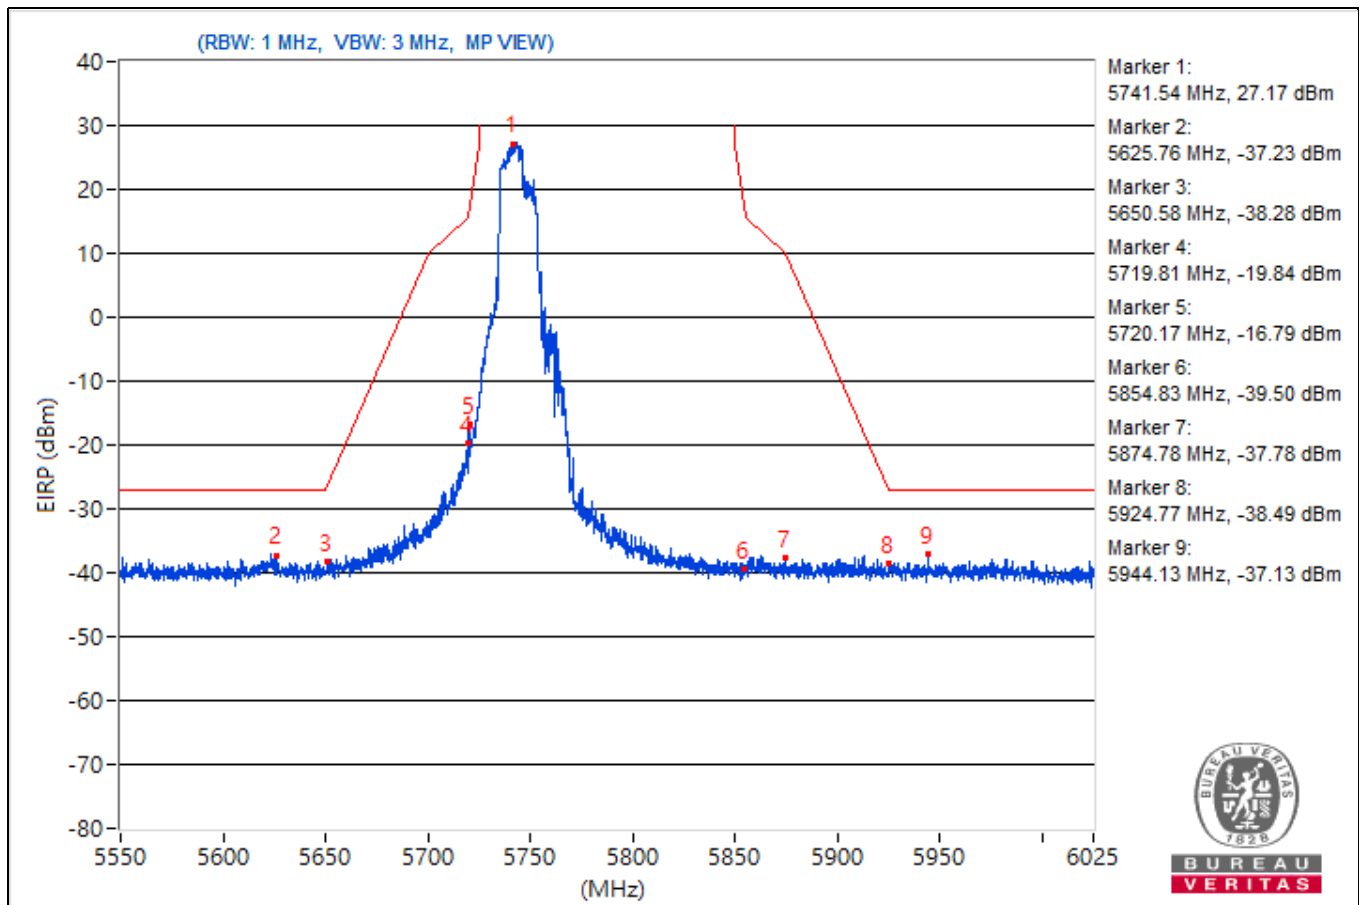


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5825.86	123.86			20.36	20.95	4.92	28.6
2	#5570.78	57.15	68.26	-11.11	-45.17	-47.13	4.92	-38.11
3	#5649.99	55.96	68.26	-12.3	-47.73	-46.78	4.92	-39.3
4	#5704.14	57.64	106.42	-48.78	-46.99	-44.47	4.92	-37.62
5	#5720.05	57.36	110.97	-53.61	-45.06	-46.76	4.92	-37.9
6	#5853.64	72.08	113.95	-41.87	-29.93	-32.73	4.92	-23.18
7	#5856.02	68.56	110.57	-42.01	-33.74	-35.75	4.92	-26.7
8	#5923.82	57.81	69.13	-11.32	-46.62	-44.42	4.92	-37.45
9	#5947.69	58.82	68.26	-9.44	-44.06	-44.71	4.92	-36.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

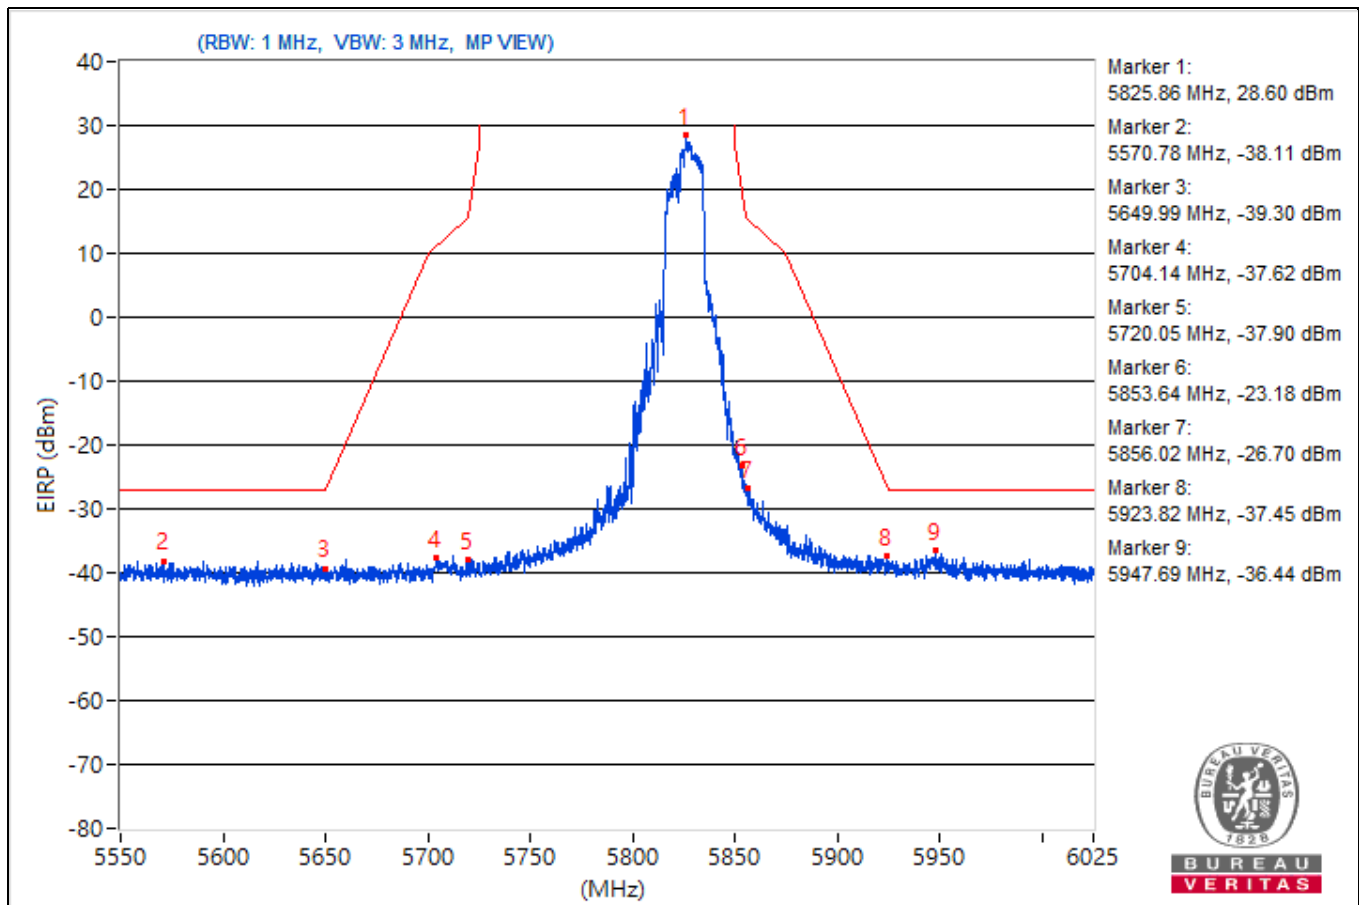


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5206.94	110.64 PK			7.79	7.08	4.92	15.38
2	*5206.94	103.78 AV			0.84	0.33	4.92	8.52
3	5123.87	61.03 PK	74	-12.97	-41.88	-42.46	4.92	-34.23
4	5123.87	53.57 AV	54	-0.43	-48.79	-50.65	4.92	-41.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

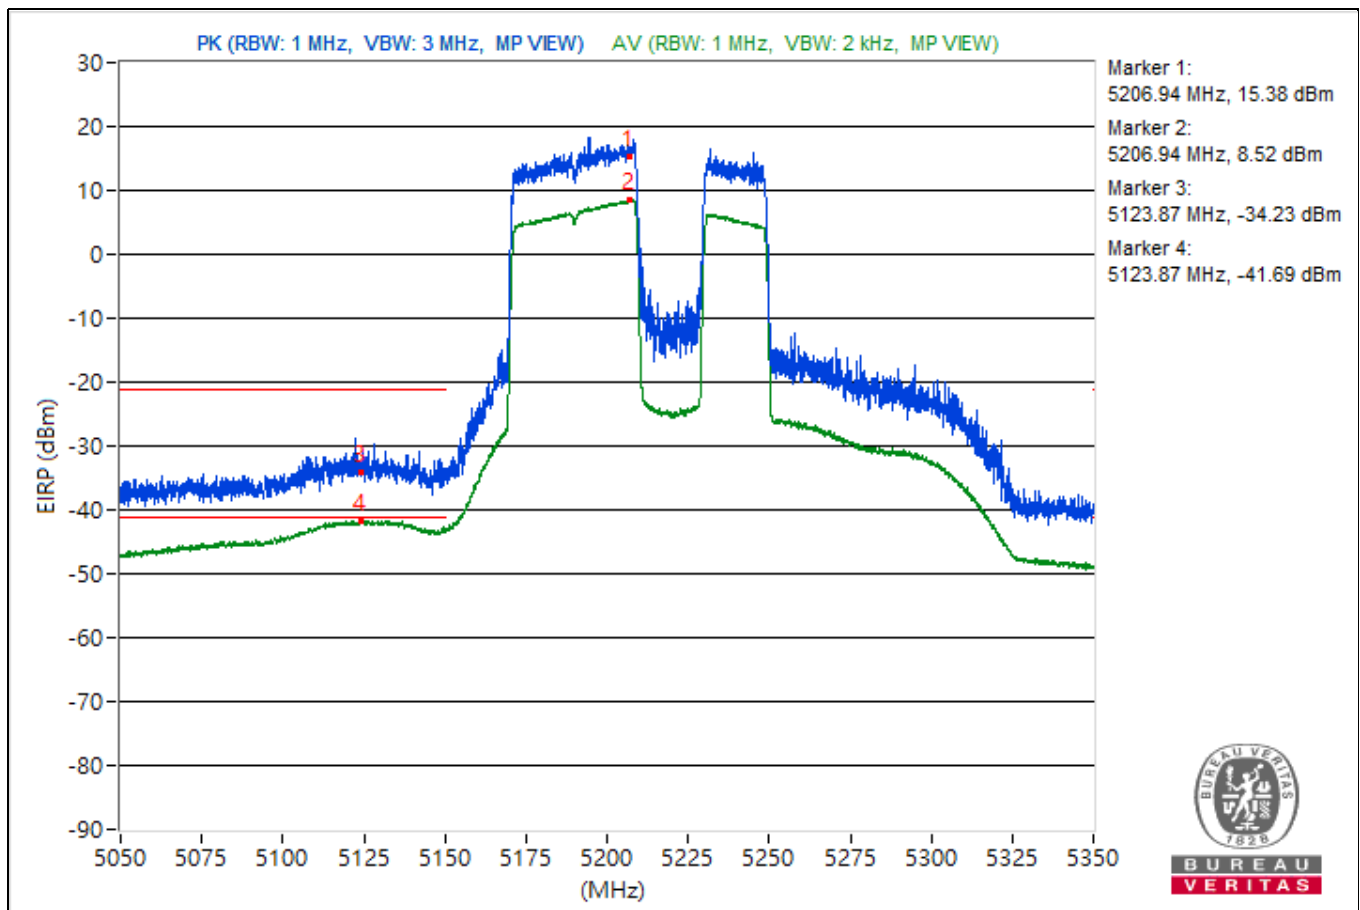


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5292.54	109.92 PK			6.98	6.46	4.92	14.66
2	*5292.54	103.27 AV			0.61	-0.53	4.92	8.01
3	5364.5	62.08 PK	74	-11.92	-39.69	-43.25	4.92	-33.18
4	5364.5	53.97 AV	54	-0.03	-47.59	-51.88	4.92	-41.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

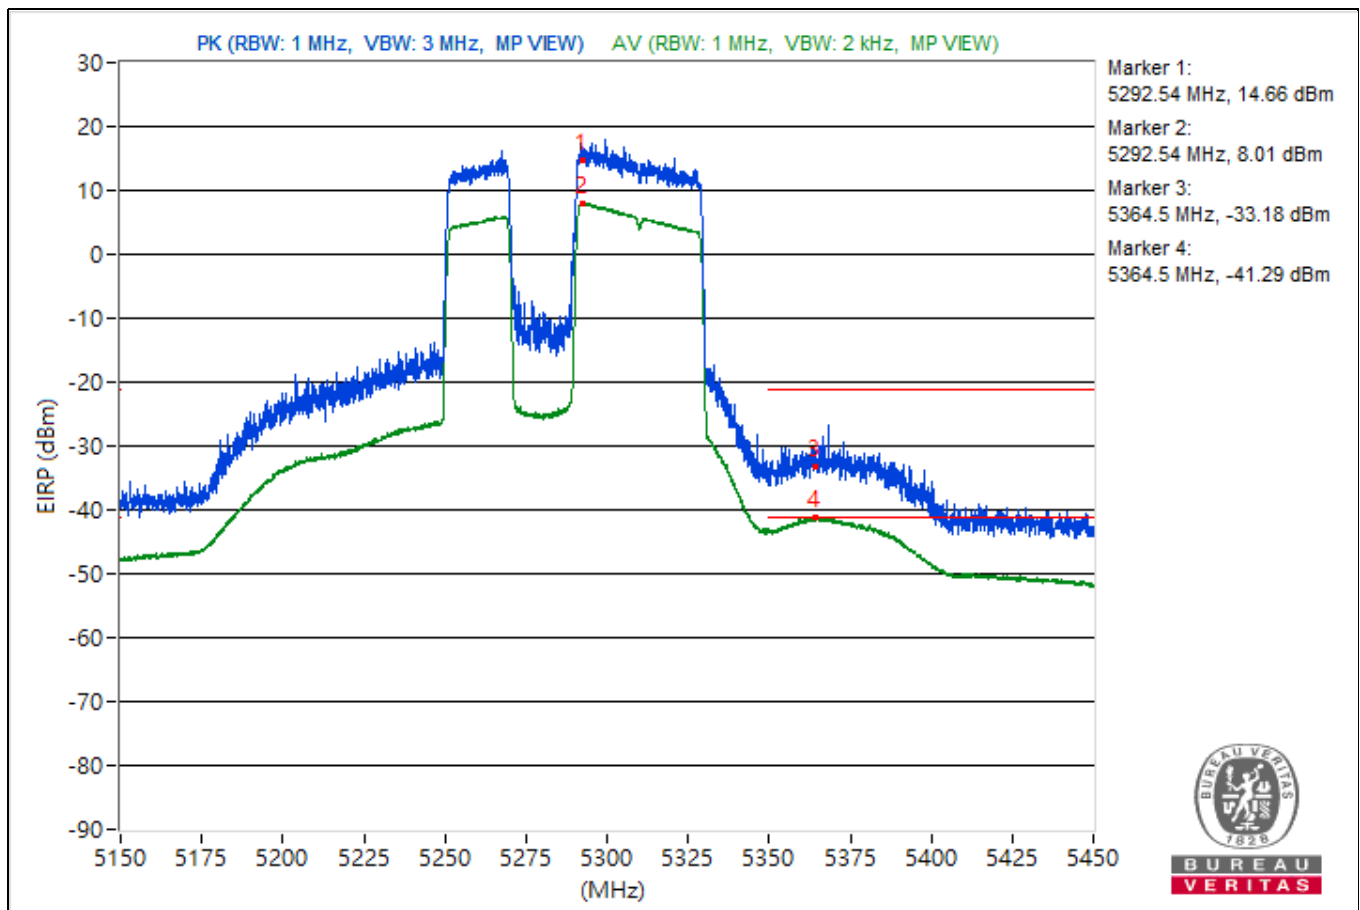


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5528.58	111.24 PK			6.03	9.42	4.92	15.98
2	*5527.81	101.93 AV			-1.13	-1.4	4.92	6.67
3	5443.56	63.67 PK	74	-10.33	-41.46	-38.19	4.92	-31.59
4	5456.52	53.49 AV	54	-0.51	-50.28	-49.2	4.92	-41.77
5	#5469.56	62.57 PK	68.26	-5.69	-41.4	-39.96	4.92	-32.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

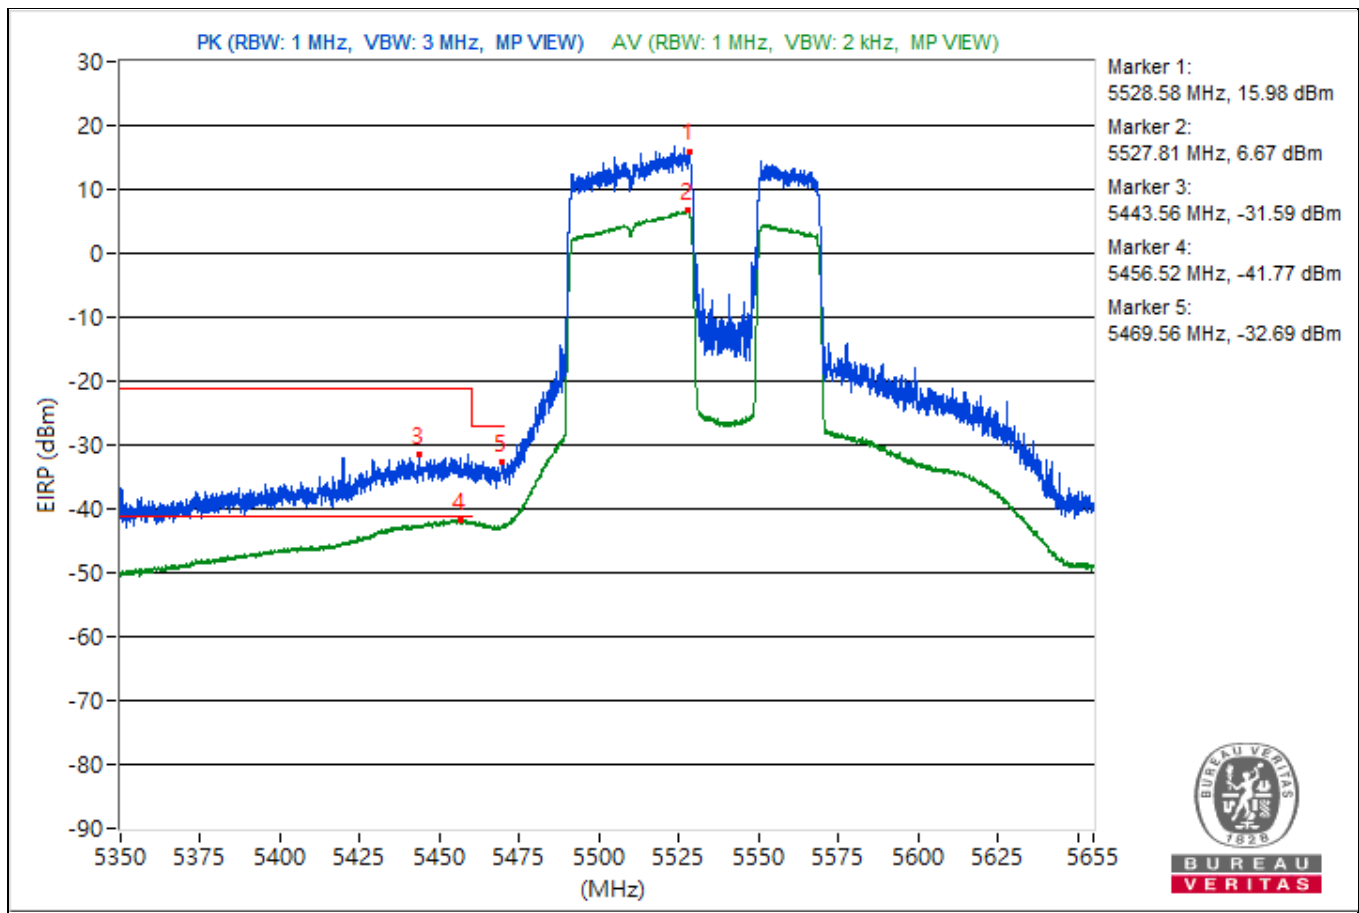


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5612.53	115.85 PK			11.29	13.7	4.92	20.59
2	*5612.72	106.1 AV			2.87	2.94	4.92	10.84
3	5456.75	64.87 PK	74	-9.13	-36.39	-41.85	4.92	-30.39
4	5459.84	53.29 AV	54	-0.71	-50.3	-49.53	4.92	-41.97
5	#5464.37	66.4 PK	68.26	-1.86	-35.21	-39.31	4.92	-28.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

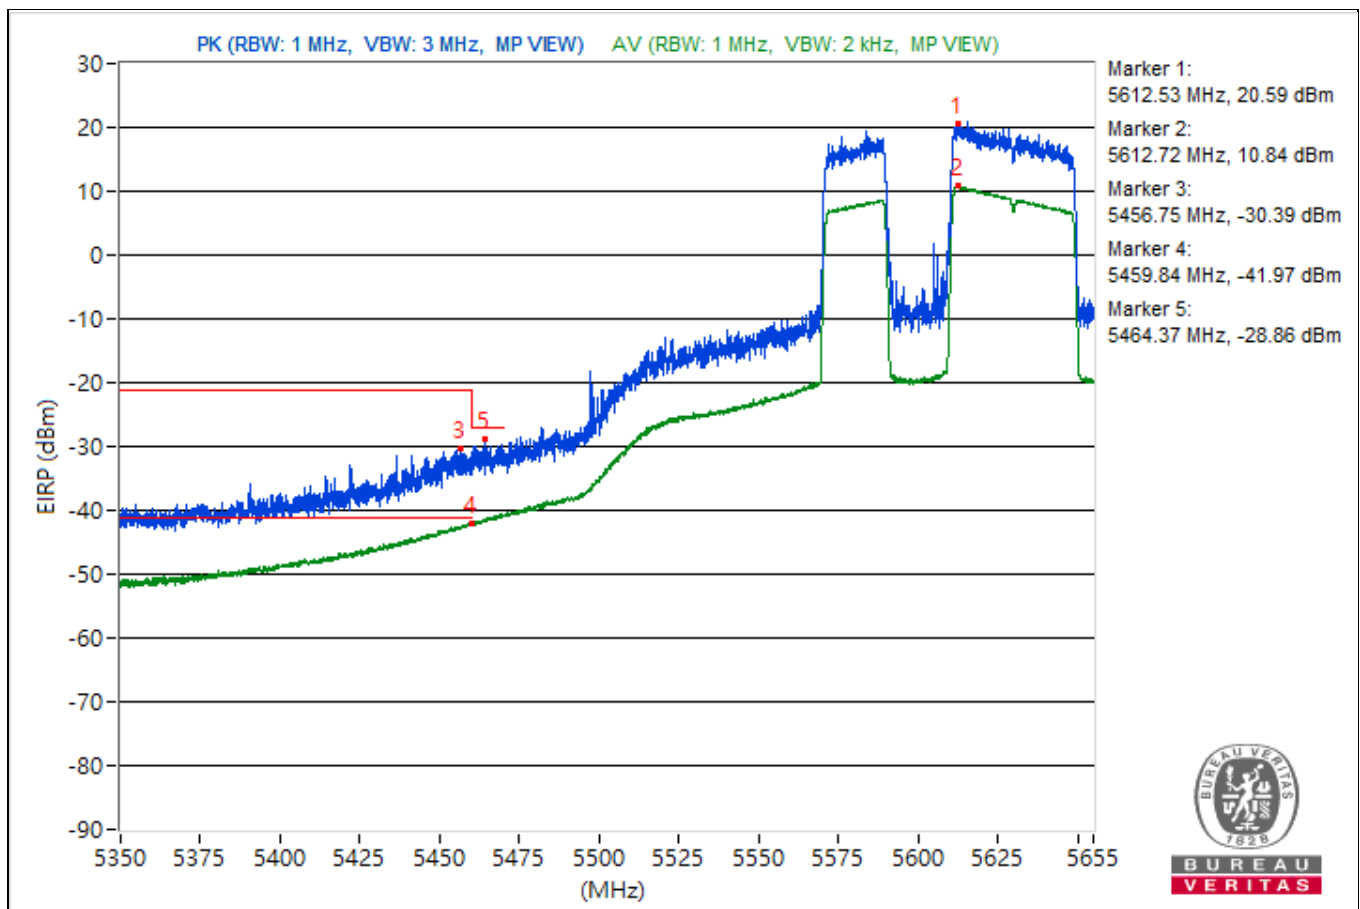


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	5.645 GHz ~ 6 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5697.27	115.4			10.28	13.55	4.92	20.14
2	#5851.21	62.58	68.26	-5.68	-39.89	-41.47	4.92	-32.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

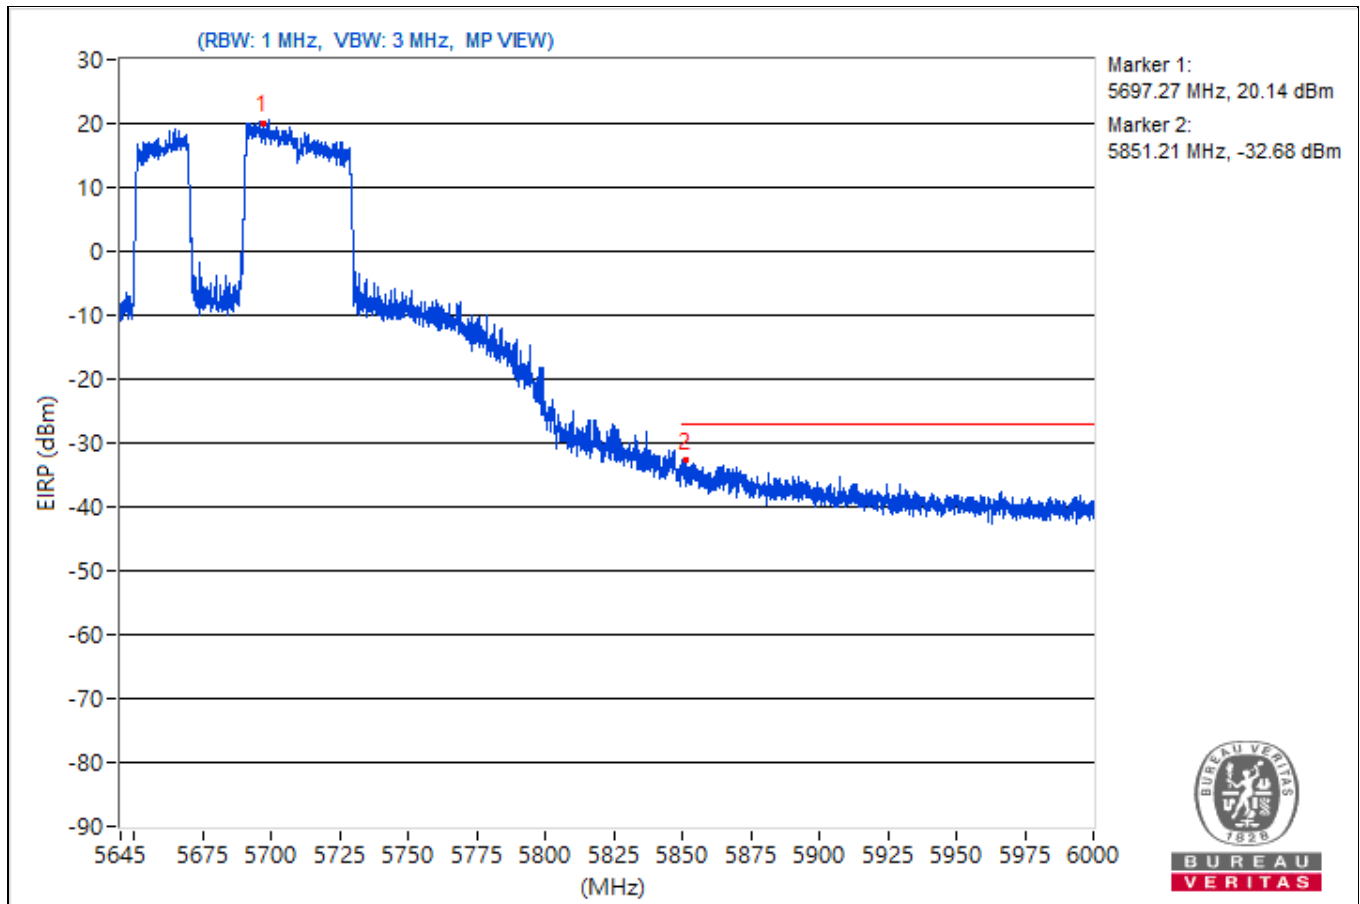


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5772.66	115.2			10.98	12.84	4.92	19.94
2	#5646.78	66.78	68.26	-1.48	-39.03	-34.79	4.92	-28.48
3	#5651.41	67.44	69.31	-1.87	-35.56	-35.96	4.92	-27.82
4	#5708.06	83.6	107.52	-23.92	-24.23	-17.4	4.92	-11.66
5	#5720.17	84.93	111.24	-26.31	-16.13	-22.61	4.92	-10.33
6	#5854.71	79.44	111.52	-32.08	-25.14	-22.7	4.92	-15.82
7	#5860.65	86.05	109.28	-23.23	-27.02	-14.35	4.92	-9.21
8	#5922.76	63.9	69.92	-6.02	-43.48	-37.2	4.92	-31.36
9	#5925.13	62.32	68.26	-5.94	-40.61	-41.14	4.92	-32.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

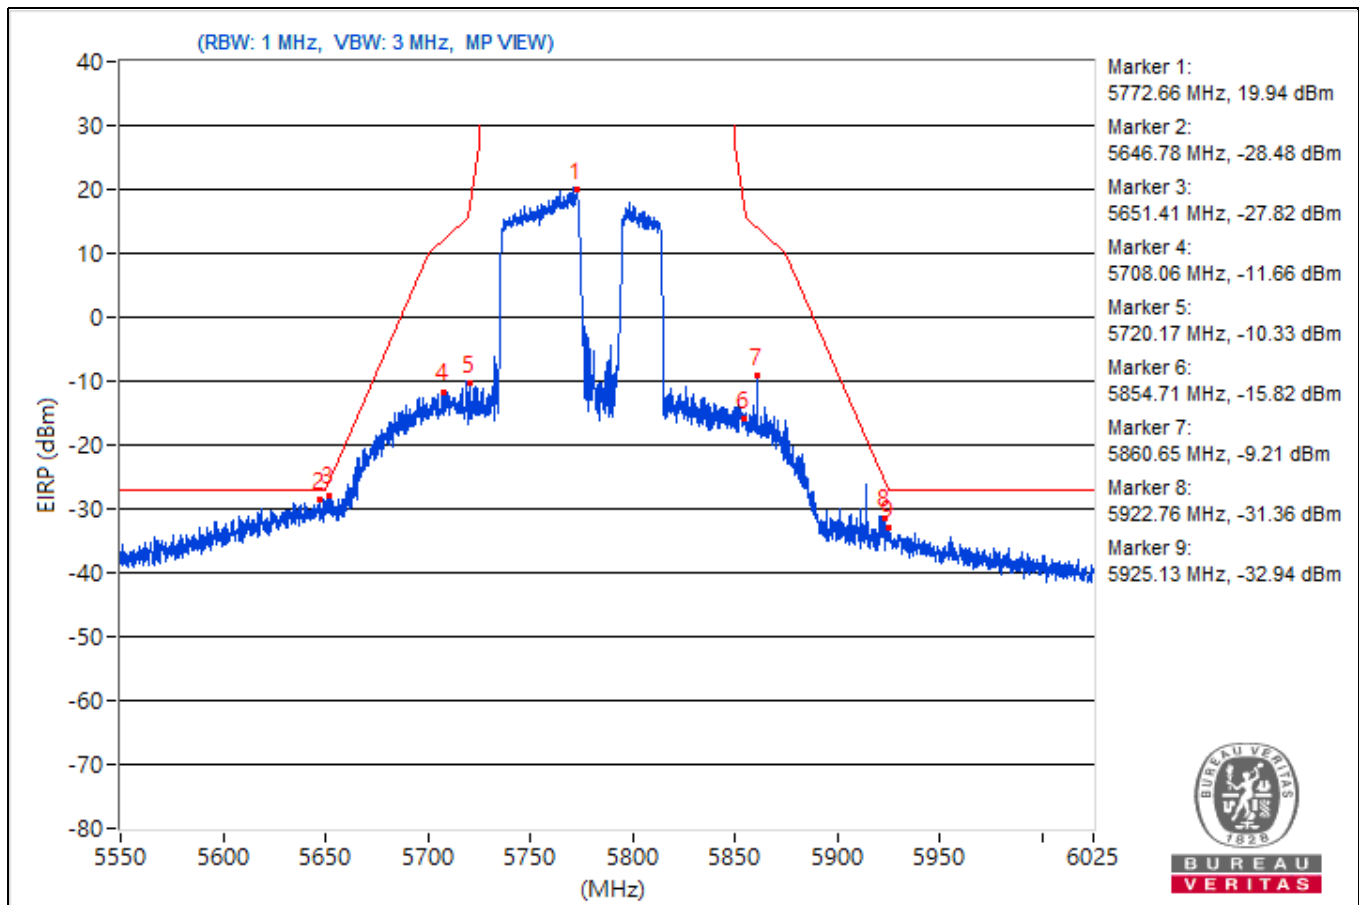


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5253.21	107.67 PK			5.73	2.73	4.92	12.41
2	*5253.21	98.97 AV			-4.54	-3.93	4.92	3.71
3	5149.98	60.5 PK	74	-13.5	-43.48	-42.01	4.92	-34.76
4	5149.98	51.62 AV	54	-2.38	-51.76	-51.39	4.92	-43.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

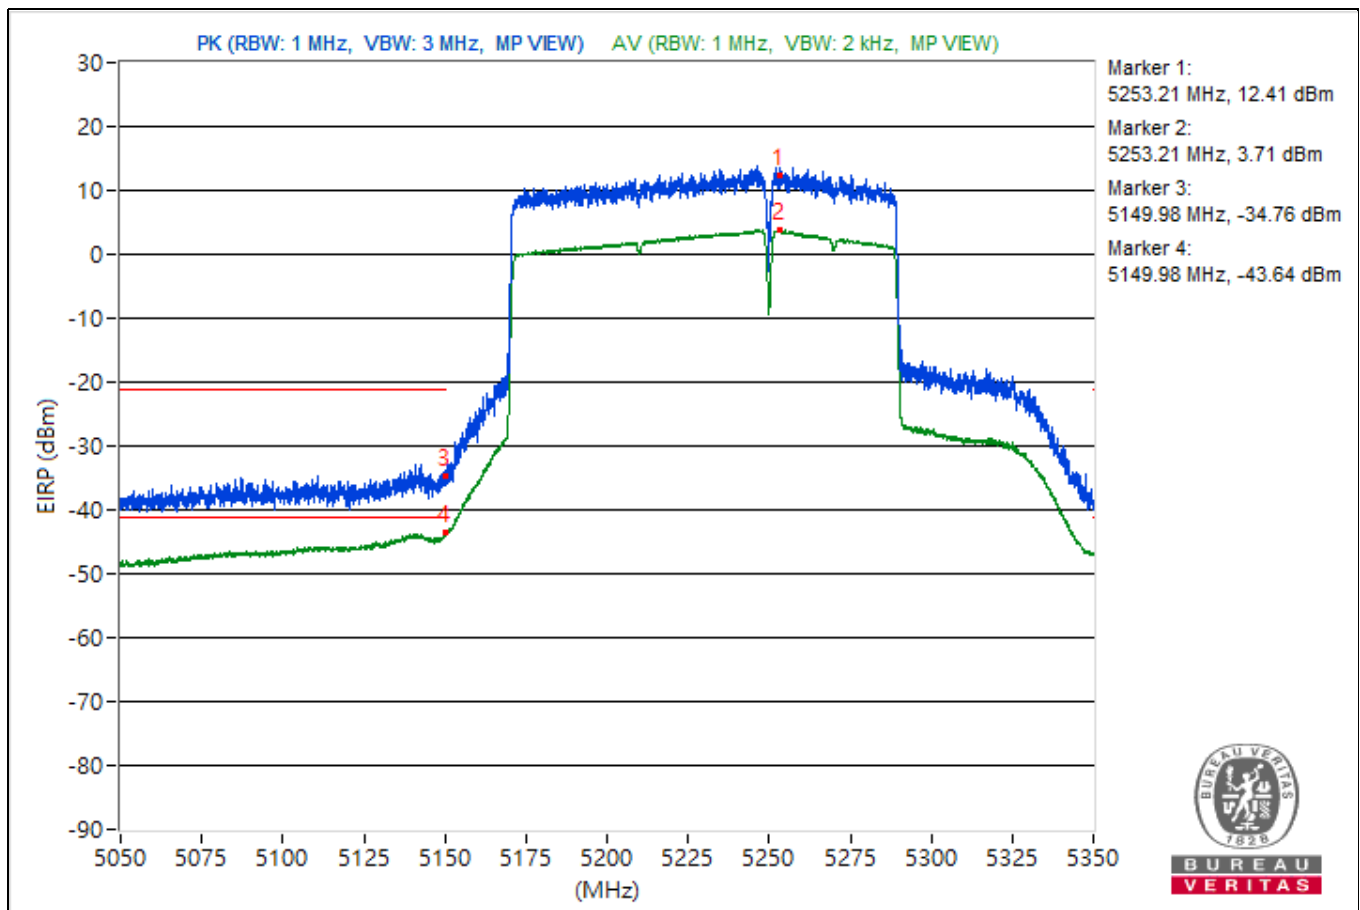


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5252.26	106.55 PK			4.22	2.29	4.92	11.29
2	*5252.26	99.09 AV			-3.86	-4.35	4.92	3.83
3	5350.1	54.71 PK	74	-19.29	-48.8	-48.18	4.92	-40.55
4	5350.1	47.77 AV	54	-6.23	-55.12	-55.74	4.92	-47.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

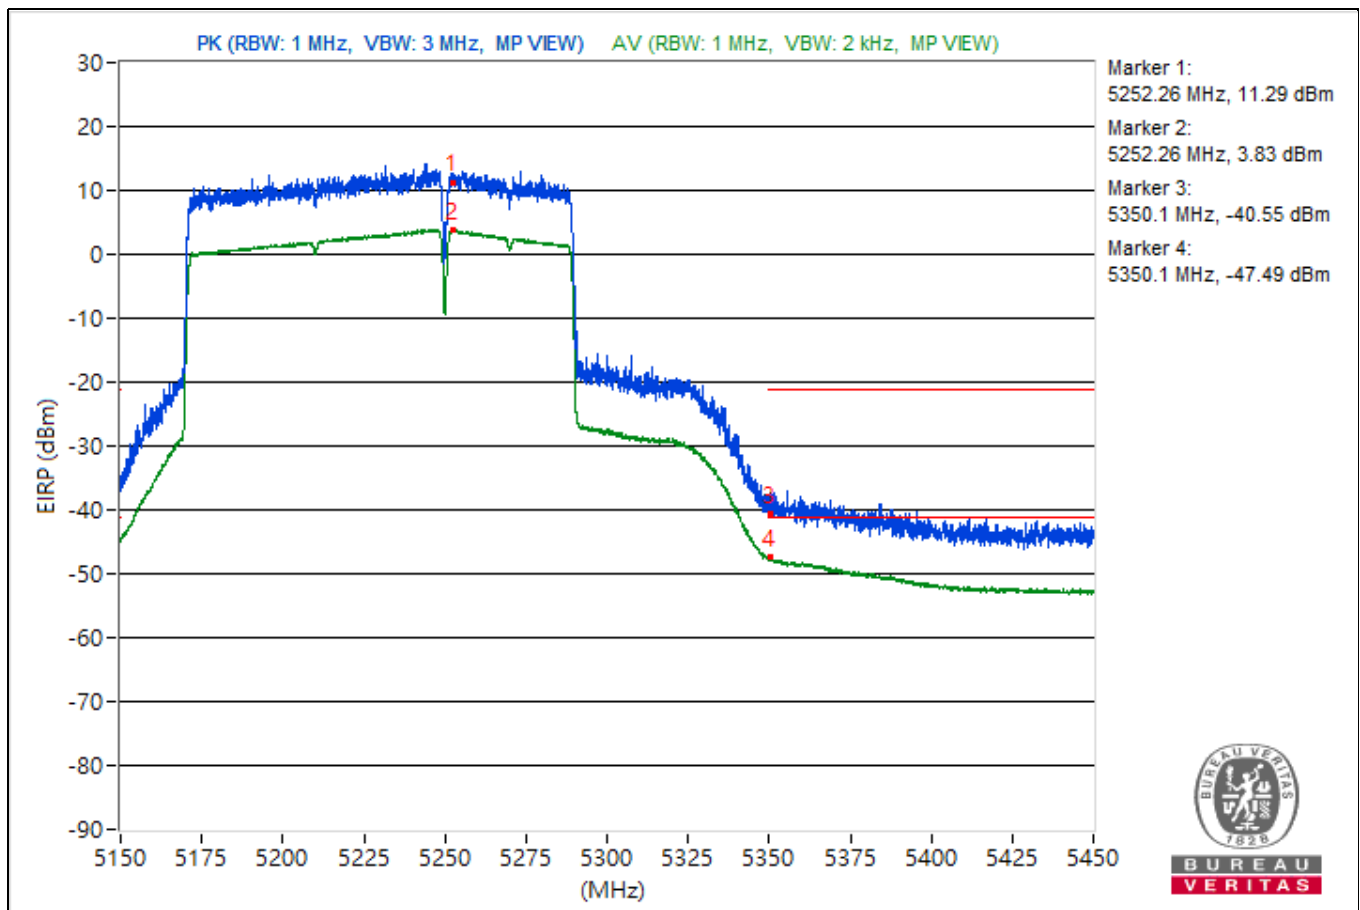


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5564.07	110.9 PK			5.47	9.18	4.92	15.64
2	*5567.69	100.31 AV			-2.65	-3.14	4.92	5.05
3	5421.41	65.46 PK	74	-8.54	-42.05	-35.61	4.92	-29.8
4	5403.57	53.09 AV	54	-0.91	-49.86	-50.36	4.92	-42.17
5	#5468.26	63.3 PK	68.26	-4.96	-40.37	-39.46	4.92	-31.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

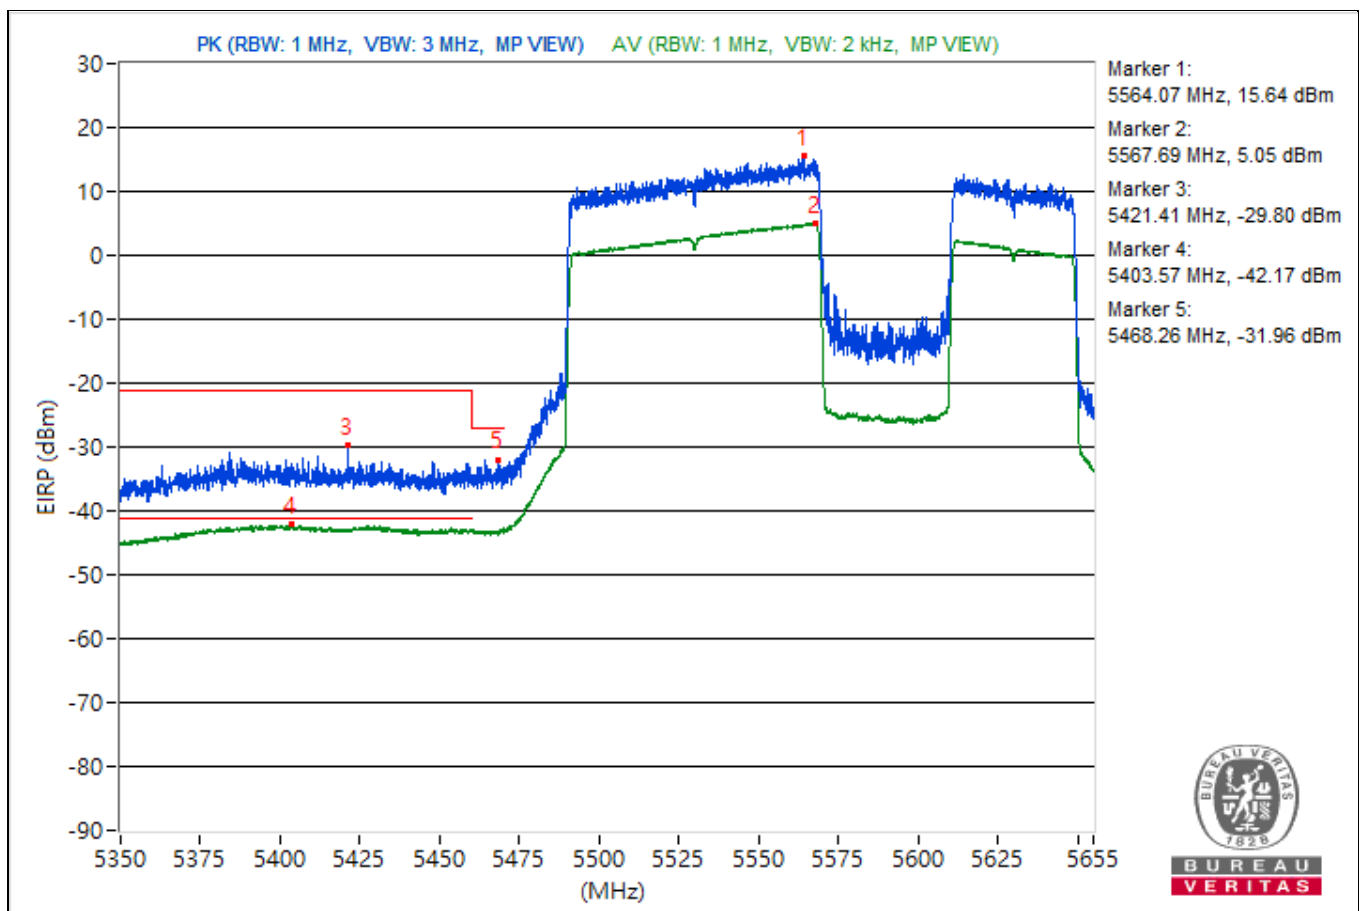


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.35 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5247.74	103.44 PK			0.93	-0.55	4.92	8.18
2	*5247.74	96.18 AV			-6.74	-7.3	4.92	0.92
3	5149.45	62.42 PK	74	-11.58	-40.84	-40.69	4.92	-32.84
4	5149.45	53.56 AV	54	-0.44	-49.99	-49.31	4.92	-41.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

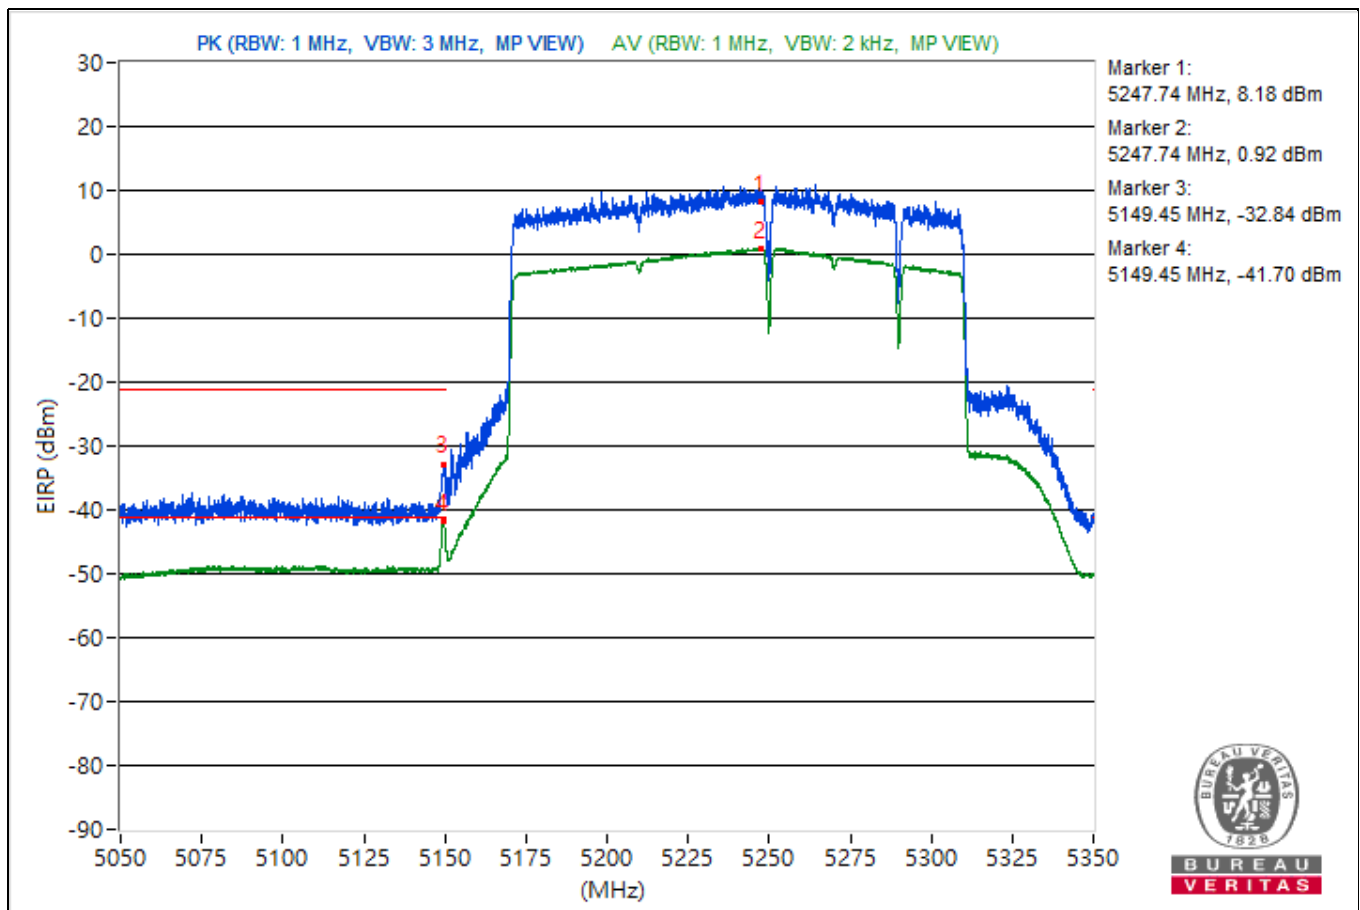


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.15 GHz ~ 5.45 GHz	Environmental Conditions	24°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5246.49	105.89 PK			2.7	2.7	4.92	10.63
2	*5246.49	96.59 AV			-6.51	-6.7	4.92	1.33
3	5354.23	53.68 PK	74	-20.32	-50.1	-48.99	4.92	-41.58
4	5354.23	45.71 AV	54	-8.29	-57.81	-57.18	4.92	-49.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

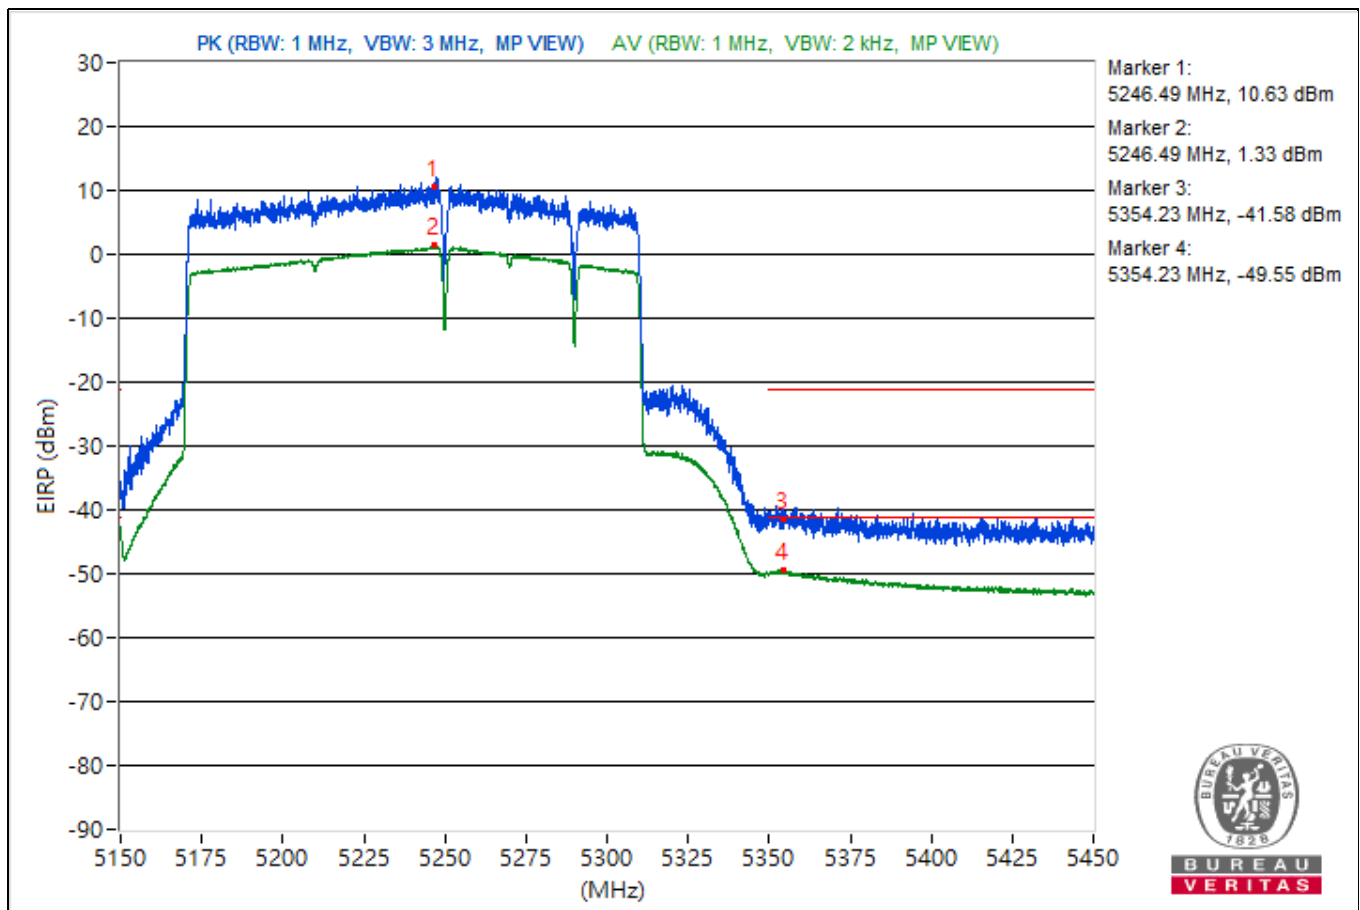


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.655 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5547.14	109.42 PK			4.67	7.38	4.92	14.16
2	*5573.37	99.61 AV			-3.49	-3.67	4.92	4.35
3	5396.25	63.6 PK	74	-10.4	-37.44	-44.05	4.92	-31.66
4	5427.62	52.74 AV	54	-1.26	-50.29	-50.62	4.92	-42.52
5	#5461.06	63.14 PK	68.26	-5.12	-38.93	-41.55	4.92	-32.12

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

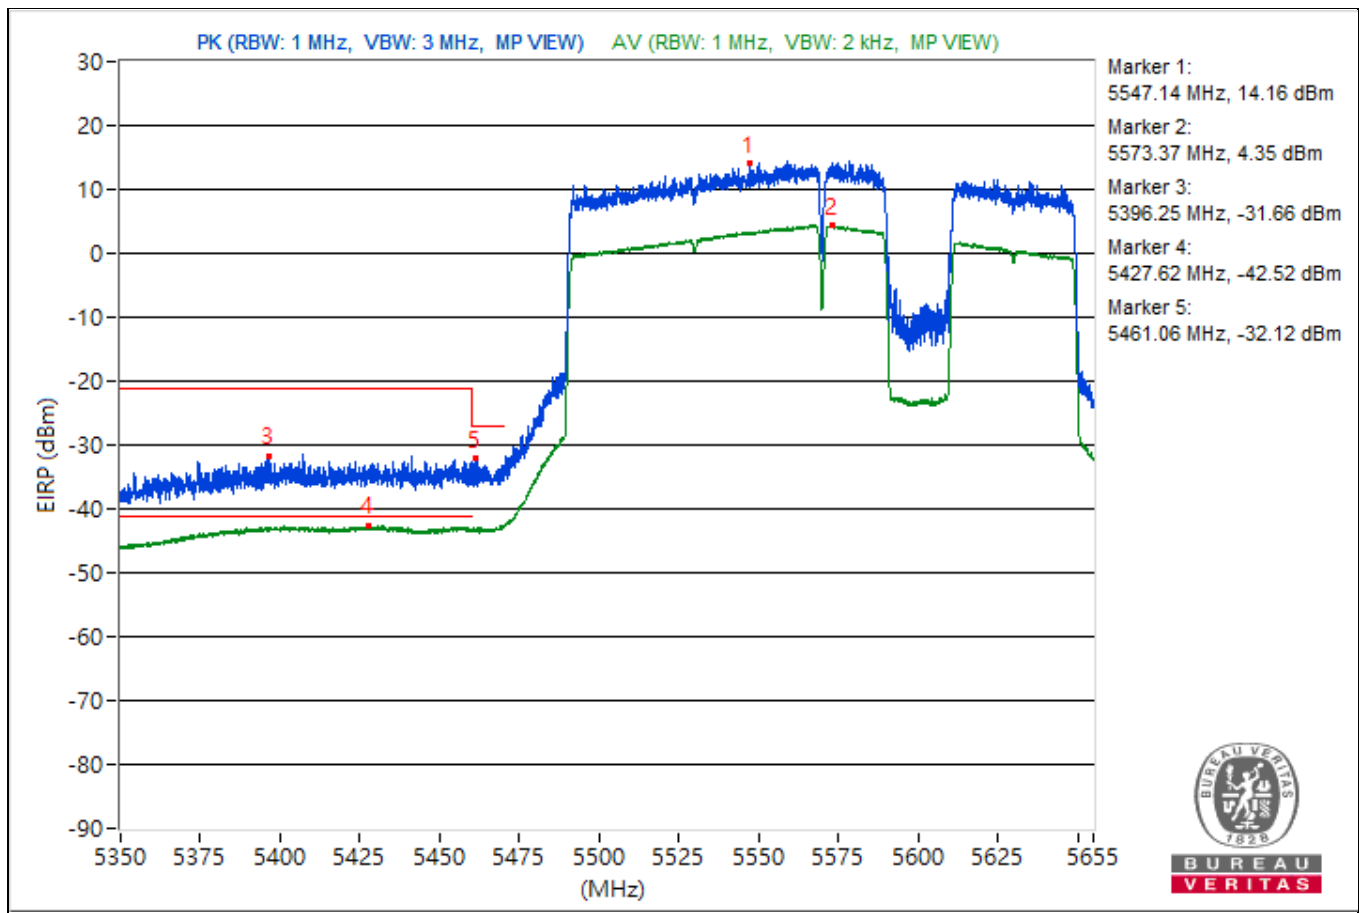

Mode B

1Tx

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.2 PK	68.2	-22.0	1.56 H	254	34.7	11.5
2	15540.00	45.7 PK	74.0	-28.3	2.55 H	301	33.8	11.9
3	15540.00	33.5 AV	54.0	-20.5	2.55 H	301	21.6	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.0 PK	68.2	-19.2	1.37 V	247	37.5	11.5
2	15540.00	48.1 PK	74.0	-25.9	2.95 V	325	36.2	11.9
3	15540.00	34.7 AV	54.0	-19.3	2.95 V	325	22.8	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	46.6 PK	68.2	-21.6	1.61 H	263	34.9	11.7
2	15600.00	45.7 PK	74.0	-28.3	2.59 H	309	34.3	11.4
3	15600.00	33.7 AV	54.0	-20.3	2.59 H	309	22.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.4 PK	68.2	-18.8	1.33 V	262	37.7	11.7
2	15600.00	48.2 PK	74.0	-25.8	2.50 V	216	36.8	11.4
3	15600.00	35.0 AV	54.0	-19.0	2.50 V	216	23.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	45.9 PK	68.2	-22.3	1.58 H	267	34.3	11.6
2	15720.00	45.7 PK	74.0	-28.3	2.61 H	315	33.3	12.4
3	15720.00	33.7 AV	54.0	-20.3	2.61 H	315	21.3	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	48.9 PK	68.2	-19.3	1.42 V	241	37.3	11.6
2	15720.00	48.2 PK	74.0	-25.8	2.92 V	323	35.8	12.4
3	15720.00	35.0 AV	54.0	-19.0	2.92 V	323	22.6	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	46.6 PK	68.2	-21.6	1.58 H	259	34.9	11.7
2	15780.00	45.1 PK	74.0	-28.9	2.60 H	298	33.0	12.1
3	15780.00	33.1 AV	54.0	-20.9	2.60 H	298	21.0	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.8 PK	68.2	-19.4	1.60 V	255	37.1	11.7
2	15780.00	47.9 PK	74.0	-26.1	2.51 V	114	35.8	12.1
3	15780.00	34.8 AV	54.0	-19.2	2.51 V	114	22.7	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	46.1 PK	74.0	-27.9	1.55 H	260	34.2	11.9
2	10600.00	37.1 AV	54.0	-16.9	1.55 H	260	25.2	11.9
3	15900.00	45.6 PK	74.0	-28.4	2.58 H	316	33.6	12.0
4	15900.00	33.4 AV	54.0	-20.6	2.58 H	316	21.4	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.7 PK	74.0	-25.3	1.37 V	260	36.8	11.9
2	10600.00	37.1 AV	54.0	-16.9	1.37 V	260	25.2	11.9
3	15900.00	47.7 PK	74.0	-26.3	3.00 V	100	35.7	12.0
4	15900.00	34.8 AV	54.0	-19.2	3.00 V	100	22.8	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	46.5 PK	74.0	-27.5	1.56 H	263	34.3	12.2
2	10640.00	37.1 AV	54.0	-16.9	1.56 H	263	24.9	12.2
3	15960.00	45.8 PK	74.0	-28.2	2.50 H	302	33.5	12.3
4	15960.00	33.5 AV	54.0	-20.5	2.50 H	302	21.2	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.0 PK	74.0	-25.0	1.10 V	247	36.8	12.2
2	10640.00	37.3 AV	54.0	-16.7	1.10 V	247	25.1	12.2
3	15960.00	47.9 PK	74.0	-26.1	3.00 V	110	35.6	12.3
4	15960.00	34.9 AV	54.0	-19.1	3.00 V	110	22.6	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	46.7 PK	74.0	-27.3	1.55 H	257	34.7	12.0
2	11000.00	37.2 AV	54.0	-16.8	1.55 H	257	25.2	12.0
3	#16500.00	46.0 PK	68.2	-22.2	2.61 H	289	32.0	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.6 PK	74.0	-25.4	1.60 V	255	36.6	12.0
2	11000.00	36.9 AV	54.0	-17.1	1.60 V	255	24.9	12.0
3	#16500.00	48.5 PK	68.2	-19.7	2.51 V	320	34.5	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	46.3 PK	74.0	-27.7	1.58 H	241	33.9	12.4
2	11160.00	36.8 AV	54.0	-17.2	1.58 H	241	24.4	12.4
3	#16740.00	45.4 PK	68.2	-22.8	2.53 H	306	29.7	15.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	48.9 PK	74.0	-25.1	1.35 V	270	36.5	12.4
2	11160.00	37.6 AV	54.0	-16.4	1.35 V	270	25.2	12.4
3	#16740.00	47.8 PK	68.2	-20.4	2.71 V	287	32.1	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	46.6 PK	74.0	-27.4	1.55 H	257	34.3	12.3
2	11400.00	37.3 AV	54.0	-16.7	1.55 H	257	25.0	12.3
3	#17100.00	45.4 PK	68.2	-22.8	2.53 H	290	28.9	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	1.51 V	251	37.0	12.3
2	11400.00	37.9 AV	54.0	-16.1	1.51 V	251	25.6	12.3
3	#17100.00	47.5 PK	68.2	-20.7	2.76 V	301	31.0	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	45.8 PK	74.0	-28.2	1.61 H	265	33.5	12.3
2	11440.00	36.7 AV	54.0	-17.3	1.61 H	265	24.4	12.3
3	#17160.00	45.2 PK	68.2	-23.0	2.59 H	304	28.4	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.4 PK	74.0	-25.6	1.34 V	252	36.1	12.3
2	11440.00	37.1 AV	54.0	-16.9	1.34 V	252	24.8	12.3
3	#17160.00	48.1 PK	68.2	-20.1	3.00 V	288	31.3	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	46.9 PK	74.0	-27.1	2.40 H	258	34.6	12.3
2	11490.00	36.0 AV	54.0	-18.0	2.40 H	258	23.7	12.3
3	#17235.00	45.0 PK	68.2	-23.2	2.30 H	111	27.8	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	48.9 PK	74.0	-25.1	1.41 V	242	36.6	12.3
2	11490.00	37.3 AV	54.0	-16.7	1.41 V	242	25.0	12.3
3	#17235.00	48.1 PK	68.2	-20.1	2.86 V	316	30.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	46.8 PK	74.0	-27.2	2.39 H	253	34.5	12.3
2	11570.00	36.0 AV	54.0	-18.0	2.39 H	253	23.7	12.3
3	#17355.00	45.3 PK	68.2	-22.9	2.28 H	127	27.0	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	49.1 PK	74.0	-24.9	1.30 V	111	36.8	12.3
2	11570.00	37.4 AV	54.0	-16.6	1.30 V	111	25.1	12.3
3	#17355.00	48.1 PK	68.2	-20.1	2.68 V	303	29.8	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.8 PK	74.0	-27.2	2.37 H	252	34.6	12.2
2	11650.00	35.8 AV	54.0	-18.2	2.37 H	252	23.6	12.2
3	#17475.00	45.4 PK	68.2	-22.8	2.32 H	112	25.7	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.7 PK	74.0	-25.3	1.33 V	269	36.5	12.2
2	11650.00	37.1 AV	54.0	-16.9	1.33 V	269	24.9	12.2
3	#17475.00	48.1 PK	68.2	-20.1	2.96 V	150	28.4	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.7 PK	68.2	-21.5	2.46 H	259	35.2	11.5
2	15540.00	44.4 PK	74.0	-29.6	2.33 H	110	32.5	11.9
3	15540.00	34.1 AV	54.0	-19.9	2.33 H	110	22.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.7 PK	68.2	-19.5	1.31 V	275	37.2	11.5
2	15540.00	47.9 PK	74.0	-26.1	2.99 V	146	36.0	11.9
3	15540.00	35.0 AV	54.0	-19.0	2.99 V	146	23.1	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	47.1 PK	68.2	-21.1	2.37 H	242	35.4	11.7
2	15600.00	45.7 PK	74.0	-28.3	2.24 H	122	34.3	11.4
3	15600.00	35.1 AV	54.0	-18.9	2.24 H	122	23.7	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.1 PK	68.2	-19.1	1.37 V	281	37.4	11.7
2	15600.00	48.4 PK	74.0	-25.6	2.99 V	162	37.0	11.4
3	15600.00	35.1 AV	54.0	-18.9	2.99 V	162	23.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	46.7 PK	68.2	-21.5	2.44 H	245	35.1	11.6
2	15720.00	45.3 PK	74.0	-28.7	2.34 H	106	32.9	12.4
3	15720.00	34.9 AV	54.0	-19.1	2.34 H	106	22.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.2 PK	68.2	-19.0	1.33 V	276	37.6	11.6
2	15720.00	48.1 PK	74.0	-25.9	2.96 V	156	35.7	12.4
3	15720.00	34.9 AV	54.0	-19.1	2.96 V	156	22.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	47.2 PK	68.2	-21.0	2.38 H	269	35.5	11.7
2	15780.00	45.6 PK	74.0	-28.4	2.28 H	121	33.5	12.1
3	15780.00	35.0 AV	54.0	-19.0	2.28 H	121	22.9	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.3 PK	68.2	-19.9	1.31 V	256	36.6	11.7
2	15780.00	47.6 PK	74.0	-26.4	2.93 V	140	35.5	12.1
3	15780.00	34.7 AV	54.0	-19.3	2.93 V	140	22.6	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	47.6 PK	74.0	-26.4	2.46 H	242	35.7	11.9
2	10600.00	36.5 AV	54.0	-17.5	2.46 H	242	24.6	11.9
3	15900.00	44.9 PK	74.0	-29.1	2.28 H	112	32.9	12.0
4	15900.00	34.4 AV	54.0	-19.6	2.28 H	112	22.4	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	49.1 PK	74.0	-24.9	1.29 V	275	37.2	11.9
2	10600.00	37.6 AV	54.0	-16.4	1.29 V	275	25.7	11.9
3	15900.00	48.2 PK	74.0	-25.8	2.99 V	149	36.2	12.0
4	15900.00	34.9 AV	54.0	-19.1	2.99 V	149	22.9	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	47.1 PK	74.0	-26.9	2.42 H	273	34.9	12.2
2	10640.00	36.3 AV	54.0	-17.7	2.42 H	273	24.1	12.2
3	15960.00	44.6 PK	74.0	-29.4	2.34 H	105	32.3	12.3
4	15960.00	34.3 AV	54.0	-19.7	2.34 H	105	22.0	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.9 PK	74.0	-25.1	1.37 V	257	36.7	12.2
2	10640.00	37.5 AV	54.0	-16.5	1.37 V	257	25.3	12.2
3	15960.00	47.7 PK	74.0	-26.3	3.00 V	150	35.4	12.3
4	15960.00	34.7 AV	54.0	-19.3	3.00 V	150	22.4	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	47.3 PK	74.0	-26.7	2.46 H	263	35.3	12.0
2	11000.00	36.5 AV	54.0	-17.5	2.46 H	263	24.5	12.0
3	#16500.00	44.7 PK	68.2	-23.5	2.31 H	107	30.7	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.2 PK	74.0	-24.8	1.39 V	276	37.2	12.0
2	11000.00	38.0 AV	54.0	-16.0	1.39 V	276	26.0	12.0
3	#16500.00	48.3 PK	68.2	-19.9	2.97 V	164	34.3	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	46.7 PK	74.0	-27.3	2.37 H	249	34.3	12.4
2	11160.00	36.0 AV	54.0	-18.0	2.37 H	249	23.6	12.4
3	#16740.00	45.3 PK	68.2	-22.9	2.33 H	113	29.6	15.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	48.6 PK	74.0	-25.4	1.39 V	264	36.2	12.4
2	11160.00	37.0 AV	54.0	-17.0	1.39 V	264	24.6	12.4
3	#16740.00	47.6 PK	68.2	-20.6	2.95 V	148	31.9	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	47.3 PK	74.0	-26.7	2.42 H	273	35.0	12.3
2	11400.00	36.1 AV	54.0	-17.9	2.42 H	273	23.8	12.3
3	#17100.00	45.1 PK	68.2	-23.1	2.32 H	119	28.6	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.0 PK	74.0	-25.0	1.33 V	272	36.7	12.3
2	11400.00	37.3 AV	54.0	-16.7	1.33 V	272	25.0	12.3
3	#17100.00	48.1 PK	68.2	-20.1	2.94 V	146	31.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	46.2 PK	74.0	-27.8	2.46 H	266	33.9	12.3
2	11440.00	35.5 AV	54.0	-18.5	2.46 H	266	23.2	12.3
3	#17160.00	45.3 PK	68.2	-22.9	2.28 H	124	28.5	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.2 PK	74.0	-25.8	1.29 V	256	35.9	12.3
2	11440.00	36.6 AV	54.0	-17.4	1.29 V	256	24.3	12.3
3	#17160.00	47.7 PK	68.2	-20.5	3.00 V	155	30.9	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	46.5 PK	74.0	-27.5	2.37 H	268	34.2	12.3
2	11490.00	35.5 AV	54.0	-18.5	2.37 H	268	23.2	12.3
3	#17235.00	45.0 PK	68.2	-23.2	2.27 H	122	27.8	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	49.1 PK	74.0	-24.9	1.28 V	262	36.8	12.3
2	11490.00	37.4 AV	54.0	-16.6	1.28 V	262	25.1	12.3
3	#17235.00	47.6 PK	68.2	-20.6	2.97 V	146	30.4	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	46.9 PK	74.0	-27.1	2.37 H	269	34.6	12.3
2	11570.00	36.1 AV	54.0	-17.9	2.37 H	269	23.8	12.3
3	#17355.00	44.4 PK	68.2	-23.8	2.25 H	114	26.1	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	48.6 PK	74.0	-25.4	1.35 V	277	36.3	12.3
2	11570.00	36.7 AV	54.0	-17.3	1.35 V	277	24.4	12.3
3	#17355.00	48.1 PK	68.2	-20.1	2.94 V	160	29.8	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	47.0 PK	74.0	-27.0	2.38 H	249	34.8	12.2
2	11650.00	36.0 AV	54.0	-18.0	2.38 H	249	23.8	12.2
3	#17475.00	44.5 PK	68.2	-23.7	2.26 H	111	24.8	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.1 PK	74.0	-25.9	1.38 V	279	35.9	12.2
2	11650.00	36.8 AV	54.0	-17.2	1.38 V	279	24.6	12.2
3	#17475.00	47.7 PK	68.2	-20.5	2.95 V	151	28.0	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	47.4 PK	68.2	-20.8	2.45 H	259	35.8	11.6
2	15570.00	44.3 PK	74.0	-29.7	2.33 H	115	32.6	11.7
3	15570.00	34.2 AV	54.0	-19.8	2.33 H	115	22.5	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	48.3 PK	68.2	-19.9	1.28 V	268	36.7	11.6
2	15570.00	48.0 PK	74.0	-26.0	2.90 V	135	36.3	11.7
3	15570.00	34.7 AV	54.0	-19.3	2.90 V	135	23.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	47.1 PK	68.2	-21.1	2.46 H	267	35.3	11.8
2	15690.00	45.4 PK	74.0	-28.6	2.27 H	98	33.0	12.4
3	15690.00	34.8 AV	54.0	-19.2	2.27 H	98	22.4	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	48.8 PK	68.2	-19.4	1.28 V	255	37.0	11.8
2	15690.00	48.5 PK	74.0	-25.5	3.00 V	140	36.1	12.4
3	15690.00	35.4 AV	54.0	-18.6	3.00 V	140	23.0	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	46.7 PK	68.2	-21.5	2.38 H	245	34.9	11.8
2	15810.00	44.8 PK	74.0	-29.2	2.24 H	103	32.9	11.9
3	15810.00	34.4 AV	54.0	-19.6	2.24 H	103	22.5	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	48.5 PK	68.2	-19.7	1.29 V	275	36.7	11.8
2	15810.00	47.5 PK	74.0	-26.5	2.93 V	137	35.6	11.9
3	15810.00	34.7 AV	54.0	-19.3	2.93 V	137	22.8	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	46.8 PK	74.0	-27.2	2.39 H	260	34.8	12.0
2	10620.00	36.1 AV	54.0	-17.9	2.39 H	260	24.1	12.0
3	15930.00	44.6 PK	74.0	-29.4	2.32 H	117	32.4	12.2
4	15930.00	34.3 AV	54.0	-19.7	2.32 H	117	22.1	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	48.1 PK	74.0	-25.9	1.28 V	272	36.1	12.0
2	10620.00	36.5 AV	54.0	-17.5	1.28 V	272	24.5	12.0
3	15930.00	48.1 PK	74.0	-25.9	3.00 V	158	35.9	12.2
4	15930.00	35.1 AV	54.0	-18.9	3.00 V	158	22.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	46.4 PK	74.0	-27.6	2.35 H	264	34.3	12.1
2	11020.00	35.5 AV	54.0	-18.5	2.35 H	264	23.4	12.1
3	#16530.00	45.0 PK	68.2	-23.2	2.36 H	122	30.6	14.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	49.0 PK	74.0	-25.0	1.23 V	276	36.9	12.1
2	11020.00	37.3 AV	54.0	-16.7	1.23 V	276	25.2	12.1
3	#16530.00	48.0 PK	68.2	-20.2	2.99 V	174	33.6	14.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	46.9 PK	74.0	-27.1	2.45 H	270	34.4	12.5
2	11100.00	36.0 AV	54.0	-18.0	2.45 H	270	23.5	12.5
3	#16650.00	45.0 PK	68.2	-23.2	2.32 H	124	29.6	15.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	47.8 PK	74.0	-26.2	1.28 V	267	35.3	12.5
2	11100.00	36.7 AV	54.0	-17.3	1.28 V	267	24.2	12.5
3	#16650.00	48.0 PK	68.2	-20.2	3.00 V	156	32.6	15.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 118 : 5590 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11180.00	46.4 PK	74.0	-27.6	2.46 H	260	34.1	12.3
2	11180.00	35.7 AV	54.0	-18.3	2.46 H	260	23.4	12.3
3	#16770.00	44.8 PK	68.2	-23.4	2.34 H	131	29.1	15.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11180.00	47.8 PK	74.0	-26.2	1.33 V	281	35.5	12.3
2	11180.00	36.6 AV	54.0	-17.4	1.33 V	281	24.3	12.3
3	#16770.00	47.7 PK	68.2	-20.5	3.04 V	161	32.0	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	47.4 PK	74.0	-26.6	2.45 H	254	35.4	12.0
2	11340.00	36.4 AV	54.0	-17.6	2.45 H	254	24.4	12.0
3	#17010.00	44.9 PK	68.2	-23.3	2.29 H	98	28.8	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	48.1 PK	74.0	-25.9	1.30 V	285	36.1	12.0
2	11340.00	38.5 AV	54.0	-15.5	1.30 V	285	26.5	12.0
3	#17010.00	48.0 PK	68.2	-20.2	3.05 V	149	31.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	46.4 PK	74.0	-27.6	2.45 H	254	34.2	12.2
2	11420.00	35.5 AV	54.0	-18.5	2.45 H	254	23.3	12.2
3	#17130.00	44.7 PK	68.2	-23.5	2.33 H	123	27.9	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	48.5 PK	74.0	-25.5	1.27 V	260	36.3	12.2
2	11420.00	36.9 AV	54.0	-17.1	1.27 V	260	24.7	12.2
3	#17130.00	48.0 PK	68.2	-20.2	2.99 V	150	31.2	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	47.1 PK	74.0	-26.9	2.46 H	259	34.7	12.4
2	11510.00	35.9 AV	54.0	-18.1	2.46 H	259	23.5	12.4
3	#17265.00	45.1 PK	68.2	-23.1	2.34 H	106	27.8	17.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	47.5 PK	74.0	-26.5	1.33 V	257	35.1	12.4
2	11510.00	36.2 AV	54.0	-17.8	1.33 V	257	23.8	12.4
3	#17265.00	47.5 PK	68.2	-20.7	2.98 V	145	30.2	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	47.6 PK	74.0	-26.4	2.44 H	257	35.3	12.3
2	11590.00	36.5 AV	54.0	-17.5	2.44 H	257	24.2	12.3
3	#17385.00	45.2 PK	68.2	-23.0	2.25 H	101	26.5	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	48.5 PK	74.0	-25.5	1.31 V	283	36.2	12.3
2	11590.00	37.0 AV	54.0	-17.0	1.31 V	283	24.7	12.3
3	#17385.00	48.4 PK	68.2	-19.8	2.95 V	164	29.7	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	47.0 PK	68.2	-21.2	2.44 H	249	35.3	11.7
2	15630.00	44.6 PK	74.0	-29.4	2.28 H	112	32.9	11.7
3	15630.00	34.1 AV	54.0	-19.9	2.28 H	112	22.4	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	47.7 PK	68.2	-20.5	1.26 V	278	36.0	11.7
2	15630.00	48.2 PK	74.0	-25.8	3.03 V	163	36.5	11.7
3	15630.00	35.3 AV	54.0	-18.7	3.03 V	163	23.6	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	47.2 PK	68.2	-21.0	2.42 H	270	35.3	11.9
2	15870.00	44.5 PK	74.0	-29.5	2.36 H	119	32.6	11.9
3	15870.00	34.3 AV	54.0	-19.7	2.36 H	119	22.4	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	48.3 PK	68.2	-19.9	1.24 V	275	36.4	11.9
2	15870.00	48.7 PK	74.0	-25.3	2.96 V	153	36.8	11.9
3	15870.00	35.5 AV	54.0	-18.5	2.96 V	153	23.6	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	46.8 PK	74.0	-27.2	2.37 H	272	34.5	12.3
2	11060.00	35.9 AV	54.0	-18.1	2.37 H	272	23.6	12.3
3	#16590.00	45.5 PK	68.2	-22.7	2.32 H	104	30.4	15.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	47.9 PK	74.0	-26.1	1.29 V	257	35.6	12.3
2	11060.00	38.0 AV	54.0	-16.0	1.29 V	257	25.7	12.3
3	#16590.00	47.6 PK	68.2	-20.6	3.04 V	144	32.5	15.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	46.3 PK	74.0	-27.7	2.40 H	248	34.1	12.2
2	11220.00	35.6 AV	54.0	-18.4	2.40 H	248	23.4	12.2
3	#16830.00	45.0 PK	68.2	-23.2	2.30 H	121	28.8	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	48.2 PK	74.0	-25.8	1.28 V	261	36.0	12.2
2	11220.00	36.9 AV	54.0	-17.1	1.28 V	261	24.7	12.2
3	#16830.00	48.8 PK	68.2	-19.4	2.95 V	149	32.6	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	46.5 PK	74.0	-27.5	2.42 H	270	34.3	12.2
2	11380.00	35.6 AV	54.0	-18.4	2.42 H	270	23.4	12.2
3	#17070.00	44.8 PK	68.2	-23.4	2.30 H	119	28.3	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	47.7 PK	74.0	-26.3	1.25 V	268	35.5	12.2
2	11380.00	37.0 AV	54.0	-17.0	1.25 V	268	24.8	12.2
3	#17070.00	48.0 PK	68.2	-20.2	2.97 V	149	31.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	47.0 PK	74.0	-27.0	2.36 H	263	34.7	12.3
2	11550.00	35.9 AV	54.0	-18.1	2.36 H	263	23.6	12.3
3	#17325.00	45.3 PK	68.2	-22.9	2.30 H	125	27.4	17.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	48.7 PK	74.0	-25.3	1.31 V	264	36.4	12.3
2	11550.00	37.1 AV	54.0	-16.9	1.31 V	264	24.8	12.3
3	#17325.00	48.0 PK	68.2	-20.2	2.95 V	145	30.1	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	47.1 PK	68.2	-21.1	2.41 H	250	35.4	11.7
2	15750.00	44.6 PK	74.0	-29.4	2.28 H	118	32.4	12.2
3	15750.00	34.2 AV	54.0	-19.8	2.28 H	118	22.0	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.0 PK	68.2	-20.2	1.33 V	271	36.3	11.7
2	15750.00	48.1 PK	74.0	-25.9	2.96 V	167	35.9	12.2
3	15750.00	35.1 AV	54.0	-18.9	2.96 V	167	22.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	47.5 PK	74.0	-26.5	2.46 H	271	35.1	12.4
2	11140.00	36.3 AV	54.0	-17.7	2.46 H	271	23.9	12.4
3	#16710.00	45.5 PK	68.2	-22.7	2.27 H	110	29.9	15.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	47.9 PK	74.0	-26.1	1.22 V	265	35.5	12.4
2	11140.00	36.5 AV	54.0	-17.5	1.22 V	265	24.1	12.4
3	#16710.00	48.6 PK	68.2	-19.6	3.03 V	170	33.0	15.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	45.8 PK	68.2	-22.4	2.15 H	201	34.3	11.5
2	15540.00	45.1 PK	74.0	-28.9	2.55 H	302	33.2	11.9
3	15540.00	33.0 AV	54.0	-21.0	2.55 H	302	21.1	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.5 PK	68.2	-19.7	1.55 V	250	37.0	11.5
2	15540.00	47.0 PK	74.0	-27.0	3.00 V	321	35.1	11.9
3	15540.00	34.5 AV	54.0	-19.5	3.00 V	321	22.6	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	46.3 PK	74.0	-27.7	2.16 H	213	34.1	12.2
2	10640.00	36.5 AV	54.0	-17.5	2.16 H	213	24.3	12.2
3	15960.00	45.6 PK	74.0	-28.4	2.51 H	302	33.3	12.3
4	15960.00	33.5 AV	54.0	-20.5	2.51 H	302	21.2	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.2 PK	74.0	-24.8	1.57 V	253	37.0	12.2
2	10640.00	37.6 AV	54.0	-16.4	1.57 V	253	25.4	12.2
3	15960.00	47.1 PK	74.0	-26.9	3.02 V	335	34.8	12.3
4	15960.00	34.9 AV	54.0	-19.1	3.02 V	335	22.6	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	45.9 PK	74.0	-28.1	2.09 H	203	33.9	12.0
2	11000.00	36.3 AV	54.0	-17.7	2.09 H	203	24.3	12.0
3	#16500.00	45.1 PK	68.2	-23.1	2.55 H	312	31.1	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.4 PK	74.0	-25.6	1.54 V	257	36.4	12.0
2	11000.00	37.2 AV	54.0	-16.8	1.54 V	257	25.2	12.0
3	#16500.00	47.7 PK	68.2	-20.5	2.98 V	308	33.7	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	45.7 PK	74.0	-28.3	2.14 H	216	33.4	12.3
2	11400.00	36.3 AV	54.0	-17.7	2.14 H	216	24.0	12.3
3	#17100.00	44.8 PK	68.2	-23.4	2.59 H	317	28.3	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.9 PK	74.0	-25.1	1.61 V	254	36.6	12.3
2	11400.00	37.5 AV	54.0	-16.5	1.61 V	254	25.2	12.3
3	#17100.00	46.6 PK	68.2	-21.6	3.04 V	323	30.1	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	46.0 PK	74.0	-28.0	2.17 H	191	33.7	12.3
2	11440.00	36.7 AV	54.0	-17.3	2.17 H	191	24.4	12.3
3	#17160.00	44.6 PK	68.2	-23.6	2.57 H	299	27.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.0 PK	74.0	-26.0	1.52 V	237	35.7	12.3
2	11440.00	36.8 AV	54.0	-17.2	1.52 V	237	24.5	12.3
3	#17160.00	46.8 PK	68.2	-21.4	3.05 V	311	30.0	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	45.9 PK	74.0	-28.1	2.12 H	185	33.6	12.3
2	11490.00	36.5 AV	54.0	-17.5	2.12 H	185	24.2	12.3
3	#17235.00	45.4 PK	68.2	-22.8	2.51 H	311	28.2	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	47.8 PK	74.0	-26.2	1.55 V	236	35.5	12.3
2	11490.00	36.7 AV	54.0	-17.3	1.55 V	236	24.4	12.3
3	#17235.00	47.0 PK	68.2	-21.2	3.03 V	318	29.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.2 PK	74.0	-27.8	2.17 H	211	34.0	12.2
2	11650.00	36.4 AV	54.0	-17.6	2.17 H	211	24.2	12.2
3	#17475.00	44.8 PK	68.2	-23.4	2.51 H	307	25.1	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.5 PK	74.0	-25.5	1.51 V	246	36.3	12.2
2	11650.00	37.3 AV	54.0	-16.7	1.51 V	246	25.1	12.2
3	#17475.00	46.9 PK	68.2	-21.3	2.96 V	318	27.2	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	45.2 PK	68.2	-23.0	2.15 H	209	33.7	11.5
2	15540.00	45.6 PK	74.0	-28.4	2.54 H	301	33.7	11.9
3	15540.00	33.4 AV	54.0	-20.6	2.54 H	301	21.5	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.8 PK	68.2	-19.4	1.52 V	254	37.3	11.5
2	15540.00	47.5 PK	74.0	-26.5	3.03 V	324	35.6	11.9
3	15540.00	34.7 AV	54.0	-19.3	3.03 V	324	22.8	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	45.8 PK	74.0	-28.2	2.13 H	197	33.6	12.2
2	10640.00	36.2 AV	54.0	-17.8	2.13 H	197	24.0	12.2
3	15960.00	45.0 PK	74.0	-29.0	2.51 H	302	32.7	12.3
4	15960.00	32.9 AV	54.0	-21.1	2.51 H	302	20.6	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.1 PK	74.0	-25.9	1.50 V	258	35.9	12.2
2	10640.00	36.7 AV	54.0	-17.3	1.50 V	258	24.5	12.2
3	15960.00	46.7 PK	74.0	-27.3	2.95 V	306	34.4	12.3
4	15960.00	34.3 AV	54.0	-19.7	2.95 V	306	22.0	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	46.2 PK	74.0	-27.8	2.19 H	198	34.2	12.0
2	11000.00	36.6 AV	54.0	-17.4	2.19 H	198	24.6	12.0
3	#16500.00	45.4 PK	68.2	-22.8	2.57 H	314	31.4	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.7 PK	74.0	-25.3	1.52 V	241	36.7	12.0
2	11000.00	37.5 AV	54.0	-16.5	1.52 V	241	25.5	12.0
3	#16500.00	47.0 PK	68.2	-21.2	2.95 V	330	33.0	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	45.3 PK	74.0	-28.7	2.14 H	100	33.0	12.3
2	11400.00	35.1 AV	54.0	-18.9	2.14 H	100	22.8	12.3
3	#17100.00	44.1 PK	68.2	-24.1	1.09 H	213	27.6	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	47.8 PK	74.0	-26.2	1.59 V	252	35.5	12.3
2	11400.00	36.7 AV	54.0	-17.3	1.59 V	252	24.4	12.3
3	#17100.00	46.2 PK	68.2	-22.0	3.04 V	328	29.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	45.8 PK	74.0	-28.2	2.19 H	94	33.5	12.3
2	11440.00	35.4 AV	54.0	-18.6	2.19 H	94	23.1	12.3
3	#17160.00	43.9 PK	68.2	-24.3	1.14 H	202	27.1	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.8 PK	74.0	-25.2	1.61 V	265	36.5	12.3
2	11440.00	37.5 AV	54.0	-16.5	1.61 V	265	25.2	12.3
3	#17160.00	46.5 PK	68.2	-21.7	2.99 V	306	29.7	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	45.0 PK	74.0	-29.0	2.09 H	108	32.7	12.3
2	11490.00	34.9 AV	54.0	-19.1	2.09 H	108	22.6	12.3
3	#17235.00	44.3 PK	68.2	-23.9	1.10 H	203	27.1	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	47.9 PK	74.0	-26.1	1.58 V	257	35.6	12.3
2	11490.00	36.8 AV	54.0	-17.2	1.58 V	257	24.5	12.3
3	#17235.00	47.3 PK	68.2	-20.9	2.96 V	324	30.1	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	45.9 PK	74.0	-28.1	2.10 H	101	33.7	12.2
2	11650.00	35.5 AV	54.0	-18.5	2.10 H	101	23.3	12.2
3	#17475.00	44.5 PK	68.2	-23.7	1.12 H	218	24.8	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.6 PK	74.0	-25.4	1.58 V	255	36.4	12.2
2	11650.00	37.5 AV	54.0	-16.5	1.58 V	255	25.3	12.2
3	#17475.00	47.1 PK	68.2	-21.1	3.05 V	305	27.4	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	45.3 PK	68.2	-22.9	2.09 H	102	33.8	11.5
2	15540.00	43.7 PK	74.0	-30.3	1.05 H	223	31.8	11.9
3	15540.00	33.1 AV	54.0	-20.9	1.05 H	223	21.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.0 PK	68.2	-20.2	1.52 V	262	36.5	11.5
2	15540.00	47.6 PK	74.0	-26.4	2.95 V	328	35.7	11.9
3	15540.00	34.9 AV	54.0	-19.1	2.95 V	328	23.0	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	44.9 PK	74.0	-29.1	2.19 H	84	32.7	12.2
2	10640.00	34.8 AV	54.0	-19.2	2.19 H	84	22.6	12.2
3	15960.00	43.5 PK	74.0	-30.5	1.10 H	214	31.2	12.3
4	15960.00	33.0 AV	54.0	-21.0	1.10 H	214	20.7	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.0 PK	74.0	-25.0	1.59 V	248	36.8	12.2
2	10640.00	37.5 AV	54.0	-16.5	1.59 V	248	25.3	12.2
3	15960.00	46.4 PK	74.0	-27.6	2.96 V	309	34.1	12.3
4	15960.00	34.2 AV	54.0	-19.8	2.96 V	309	21.9	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	45.5 PK	74.0	-28.5	2.13 H	95	33.5	12.0
2	11000.00	35.3 AV	54.0	-18.7	2.13 H	95	23.3	12.0
3	#16500.00	44.5 PK	68.2	-23.7	1.04 H	215	30.5	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.6 PK	74.0	-25.4	1.52 V	243	36.6	12.0
2	11000.00	37.3 AV	54.0	-16.7	1.52 V	243	25.3	12.0
3	#16500.00	47.3 PK	68.2	-20.9	3.00 V	329	33.3	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	44.9 PK	74.0	-29.1	2.17 H	106	32.6	12.3
2	11400.00	34.7 AV	54.0	-19.3	2.17 H	106	22.4	12.3
3	#17100.00	43.7 PK	68.2	-24.5	1.14 H	201	27.2	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.1 PK	74.0	-24.9	1.54 V	265	36.8	12.3
2	11400.00	37.4 AV	54.0	-16.6	1.54 V	265	25.1	12.3
3	#17100.00	47.1 PK	68.2	-21.1	3.06 V	330	30.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	45.4 PK	74.0	-28.6	2.18 H	111	33.1	12.3
2	11440.00	35.4 AV	54.0	-18.6	2.18 H	111	23.1	12.3
3	#17160.00	44.0 PK	68.2	-24.2	1.05 H	221	27.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.2 PK	74.0	-25.8	1.54 V	252	35.9	12.3
2	11440.00	37.0 AV	54.0	-17.0	1.54 V	252	24.7	12.3
3	#17160.00	47.1 PK	68.2	-21.1	2.96 V	331	30.3	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	45.1 PK	74.0	-28.9	2.10 H	86	32.8	12.3
2	11490.00	35.1 AV	54.0	-18.9	2.10 H	86	22.8	12.3
3	#17235.00	44.0 PK	68.2	-24.2	1.08 H	204	26.8	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	48.9 PK	74.0	-25.1	1.53 V	243	36.6	12.3
2	11490.00	37.4 AV	54.0	-16.6	1.53 V	243	25.1	12.3
3	#17235.00	47.5 PK	68.2	-20.7	3.01 V	337	30.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	45.6 PK	74.0	-28.4	2.17 H	108	33.4	12.2
2	11650.00	35.3 AV	54.0	-18.7	2.17 H	108	23.1	12.2
3	#17475.00	44.6 PK	68.2	-23.6	1.11 H	206	24.9	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.7 PK	74.0	-25.3	1.56 V	265	36.5	12.2
2	11650.00	37.4 AV	54.0	-16.6	1.56 V	265	25.2	12.2
3	#17475.00	47.2 PK	68.2	-21.0	3.06 V	314	27.5	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	45.1 PK	68.2	-23.1	2.08 H	89	33.6	11.5
2	15540.00	44.1 PK	74.0	-29.9	1.11 H	217	32.2	11.9
3	15540.00	33.5 AV	54.0	-20.5	1.11 H	217	21.6	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.9 PK	68.2	-19.3	1.56 V	253	37.4	11.5
2	15540.00	47.0 PK	74.0	-27.0	3.04 V	326	35.1	11.9
3	15540.00	34.6 AV	54.0	-19.4	3.04 V	326	22.7	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	45.5 PK	74.0	-28.5	2.14 H	107	33.3	12.2
2	10640.00	35.1 AV	54.0	-18.9	2.14 H	107	22.9	12.2
3	15960.00	44.2 PK	74.0	-29.8	1.05 H	203	31.9	12.3
4	15960.00	33.6 AV	54.0	-20.4	1.05 H	203	21.3	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	47.9 PK	74.0	-26.1	1.60 V	250	35.7	12.2
2	10640.00	36.7 AV	54.0	-17.3	1.60 V	250	24.5	12.2
3	15960.00	47.2 PK	74.0	-26.8	2.95 V	325	34.9	12.3
4	15960.00	34.8 AV	54.0	-19.2	2.95 V	325	22.5	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	45.2 PK	74.0	-28.8	2.09 H	92	33.2	12.0
2	11000.00	35.2 AV	54.0	-18.8	2.09 H	92	23.2	12.0
3	#16500.00	43.5 PK	68.2	-24.7	1.14 H	215	29.5	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.3 PK	74.0	-25.7	1.53 V	251	36.3	12.0
2	11000.00	37.2 AV	54.0	-16.8	1.53 V	251	25.2	12.0
3	#16500.00	46.6 PK	68.2	-21.6	3.00 V	324	32.6	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	45.7 PK	74.0	-28.3	2.12 H	99	33.4	12.3
2	11400.00	35.5 AV	54.0	-18.5	2.12 H	99	23.2	12.3
3	#17100.00	44.5 PK	68.2	-23.7	1.08 H	219	28.0	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.7 PK	74.0	-25.3	1.51 V	261	36.4	12.3
2	11400.00	37.3 AV	54.0	-16.7	1.51 V	261	25.0	12.3
3	#17100.00	47.3 PK	68.2	-20.9	3.04 V	335	30.8	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	45.3 PK	74.0	-28.7	2.11 H	110	33.0	12.3
2	11440.00	35.0 AV	54.0	-19.0	2.11 H	110	22.7	12.3
3	#17160.00	44.0 PK	68.2	-24.2	1.11 H	206	27.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	47.9 PK	74.0	-26.1	1.56 V	237	35.6	12.3
2	11440.00	36.6 AV	54.0	-17.4	1.56 V	237	24.3	12.3
3	#17160.00	46.9 PK	68.2	-21.3	2.98 V	320	30.1	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	45.4 PK	74.0	-28.6	2.11 H	89	33.1	12.3
2	11490.00	35.2 AV	54.0	-18.8	2.11 H	89	22.9	12.3
3	#17235.00	44.1 PK	68.2	-24.1	1.09 H	228	26.9	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	48.2 PK	74.0	-25.8	1.59 V	251	35.9	12.3
2	11490.00	36.6 AV	54.0	-17.4	1.59 V	251	24.3	12.3
3	#17235.00	46.9 PK	68.2	-21.3	3.00 V	332	29.7	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	45.2 PK	74.0	-28.8	2.10 H	104	33.0	12.2
2	11650.00	35.0 AV	54.0	-19.0	2.10 H	104	22.8	12.2
3	#17475.00	44.1 PK	68.2	-24.1	1.09 H	210	24.4	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	49.2 PK	74.0	-24.8	1.57 V	253	37.0	12.2
2	11650.00	37.5 AV	54.0	-16.5	1.57 V	253	25.3	12.2
3	#17475.00	46.9 PK	68.2	-21.3	2.96 V	330	27.2	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	45.8 PK	68.2	-22.4	2.09 H	94	34.3	11.5
2	15540.00	43.8 PK	74.0	-30.2	1.09 H	228	31.9	11.9
3	15540.00	33.1 AV	54.0	-20.9	1.09 H	228	21.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.2 PK	68.2	-20.0	1.58 V	236	36.7	11.5
2	15540.00	47.5 PK	74.0	-26.5	2.95 V	320	35.6	11.9
3	15540.00	34.8 AV	54.0	-19.2	2.95 V	320	22.9	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	44.8 PK	74.0	-29.2	2.14 H	105	32.6	12.2
2	10640.00	34.8 AV	54.0	-19.2	2.14 H	105	22.6	12.2
3	15960.00	44.0 PK	74.0	-30.0	1.08 H	209	31.7	12.3
4	15960.00	33.3 AV	54.0	-20.7	1.08 H	209	21.0	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.6 PK	74.0	-25.4	1.50 V	250	36.4	12.2
2	10640.00	37.0 AV	54.0	-17.0	1.50 V	250	24.8	12.2
3	15960.00	46.5 PK	74.0	-27.5	2.98 V	319	34.2	12.3
4	15960.00	34.2 AV	54.0	-19.8	2.98 V	319	21.9	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	45.6 PK	74.0	-28.4	2.18 H	88	33.6	12.0
2	11000.00	35.3 AV	54.0	-18.7	2.18 H	88	23.3	12.0
3	#16500.00	43.9 PK	68.2	-24.3	1.10 H	201	29.9	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	47.8 PK	74.0	-26.2	1.54 V	249	35.8	12.0
2	11000.00	36.6 AV	54.0	-17.4	1.54 V	249	24.6	12.0
3	#16500.00	46.9 PK	68.2	-21.3	2.99 V	321	32.9	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	45.3 PK	74.0	-28.7	2.13 H	103	33.0	12.3
2	11400.00	35.2 AV	54.0	-18.8	2.13 H	103	22.9	12.3
3	#17100.00	43.7 PK	68.2	-24.5	1.11 H	216	27.2	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.4 PK	74.0	-25.6	1.60 V	246	36.1	12.3
2	11400.00	36.8 AV	54.0	-17.2	1.60 V	246	24.5	12.3
3	#17100.00	47.5 PK	68.2	-20.7	2.94 V	329	31.0	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	44.9 PK	74.0	-29.1	2.10 H	113	32.6	12.3
2	11440.00	34.8 AV	54.0	-19.2	2.10 H	113	22.5	12.3
3	#17160.00	43.5 PK	68.2	-24.7	1.05 H	197	26.7	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.0 PK	74.0	-26.0	1.54 V	238	35.7	12.3
2	11440.00	36.6 AV	54.0	-17.4	1.54 V	238	24.3	12.3
3	#17160.00	47.4 PK	68.2	-20.8	3.02 V	313	30.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	45.8 PK	74.0	-28.2	2.19 H	111	33.5	12.3
2	11490.00	35.6 AV	54.0	-18.4	2.19 H	111	23.3	12.3
3	#17235.00	44.2 PK	68.2	-24.0	1.05 H	216	27.0	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	48.3 PK	74.0	-25.7	1.50 V	259	36.0	12.3
2	11490.00	37.0 AV	54.0	-17.0	1.50 V	259	24.7	12.3
3	#17235.00	47.5 PK	68.2	-20.7	3.02 V	337	30.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	45.3 PK	74.0	-28.7	2.12 H	89	33.1	12.2
2	11650.00	35.3 AV	54.0	-18.7	2.12 H	89	23.1	12.2
3	#17475.00	44.2 PK	68.2	-24.0	1.05 H	208	24.5	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.7 PK	74.0	-25.3	1.57 V	248	36.5	12.2
2	11650.00	37.4 AV	54.0	-16.6	1.57 V	248	25.2	12.2
3	#17475.00	47.1 PK	68.2	-21.1	2.98 V	305	27.4	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	44.8 PK	68.2	-23.4	2.12 H	98	33.1	11.7
2	15630.00	44.0 PK	74.0	-30.0	1.04 H	222	32.3	11.7
3	15630.00	33.1 AV	54.0	-20.9	1.04 H	222	21.4	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	47.8 PK	68.2	-20.4	1.57 V	249	36.1	11.7
2	15630.00	47.1 PK	74.0	-26.9	2.96 V	331	35.4	11.7
3	15630.00	34.4 AV	54.0	-19.6	2.96 V	331	22.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	45.4 PK	68.2	-22.8	2.20 H	115	33.5	11.9
2	15870.00	43.7 PK	74.0	-30.3	1.04 H	211	31.8	11.9
3	15870.00	33.3 AV	54.0	-20.7	1.04 H	211	21.4	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	48.5 PK	68.2	-19.7	1.52 V	247	36.6	11.9
2	15870.00	46.7 PK	74.0	-27.3	3.01 V	324	34.8	11.9
3	15870.00	34.3 AV	54.0	-19.7	3.01 V	324	22.4	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	45.6 PK	74.0	-28.4	2.09 H	94	33.3	12.3
2	11060.00	35.3 AV	54.0	-18.7	2.09 H	94	23.0	12.3
3	#16590.00	44.6 PK	68.2	-23.6	1.11 H	206	29.5	15.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	48.7 PK	74.0	-25.3	1.52 V	243	36.4	12.3
2	11060.00	37.5 AV	54.0	-16.5	1.52 V	243	25.2	12.3
3	#16590.00	47.3 PK	68.2	-20.9	2.99 V	326	32.2	15.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	45.1 PK	74.0	-28.9	2.06 H	97	32.9	12.2
2	11220.00	35.1 AV	54.0	-18.9	2.06 H	97	22.9	12.2
3	#16830.00	44.1 PK	68.2	-24.1	1.12 H	212	27.9	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	48.5 PK	74.0	-25.5	1.56 V	246	36.3	12.2
2	11220.00	37.3 AV	54.0	-16.7	1.56 V	246	25.1	12.2
3	#16830.00	46.9 PK	68.2	-21.3	3.01 V	334	30.7	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	45.1 PK	74.0	-28.9	2.16 H	102	32.9	12.2
2	11380.00	35.0 AV	54.0	-19.0	2.16 H	102	22.8	12.2
3	#17070.00	43.7 PK	68.2	-24.5	1.13 H	211	27.2	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	49.1 PK	74.0	-24.9	1.52 V	256	36.9	12.2
2	11380.00	37.5 AV	54.0	-16.5	1.52 V	256	25.3	12.2
3	#17070.00	47.3 PK	68.2	-20.9	2.97 V	318	30.8	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	45.3 PK	74.0	-28.7	2.18 H	113	33.0	12.3
2	11550.00	35.0 AV	54.0	-19.0	2.18 H	113	22.7	12.3
3	#17325.00	44.2 PK	68.2	-24.0	1.05 H	215	26.3	17.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	48.2 PK	74.0	-25.8	1.57 V	241	35.9	12.3
2	11550.00	37.0 AV	54.0	-17.0	1.57 V	241	24.7	12.3
3	#17325.00	47.1 PK	68.2	-21.1	3.01 V	321	29.2	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	46.1 PK	68.2	-22.1	2.18 H	111	34.4	11.7
2	15750.00	43.8 PK	74.0	-30.2	1.06 H	203	31.6	12.2
3	15750.00	33.3 AV	54.0	-20.7	1.06 H	203	21.1	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.4 PK	68.2	-19.8	1.52 V	251	36.7	11.7
2	15750.00	46.7 PK	74.0	-27.3	3.00 V	310	34.5	12.2
3	15750.00	34.1 AV	54.0	-19.9	3.00 V	310	21.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	46.5 PK	74.0	-27.5	2.20 H	122	34.1	12.4
2	11140.00	35.8 AV	54.0	-18.2	2.20 H	122	23.4	12.4
3	#16710.00	44.0 PK	68.2	-24.2	1.08 H	206	28.4	15.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.5 PK	74.0	-25.5	1.49 V	259	36.1	12.4
2	11140.00	36.8 AV	54.0	-17.2	1.49 V	259	24.4	12.4
3	#16710.00	46.4 PK	68.2	-21.8	3.03 V	307	30.8	15.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	45.4 PK	68.2	-22.8	2.17 H	109	33.7	11.7
2	15750.00	44.7 PK	74.0	-29.3	1.06 H	197	32.5	12.2
3	15750.00	33.7 AV	54.0	-20.3	1.06 H	197	21.5	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.9 PK	68.2	-19.3	1.49 V	251	37.2	11.7
2	15750.00	46.3 PK	74.0	-27.7	2.96 V	335	34.1	12.2
3	15750.00	34.1 AV	54.0	-19.9	2.96 V	335	21.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	45.6 PK	74.0	-28.4	2.22 H	116	33.2	12.4
2	11140.00	35.3 AV	54.0	-18.7	2.22 H	116	22.9	12.4
3	#16700.00	45.0 PK	68.2	-23.2	1.10 H	195	29.4	15.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.6 PK	74.0	-25.4	1.43 V	254	36.2	12.4
2	11140.00	37.2 AV	54.0	-16.8	1.43 V	254	24.8	12.4
3	#16710.00	47.0 PK	68.2	-21.2	2.91 V	347	31.4	15.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode B

2Tx

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	47.0 PK	68.2	-21.2	1.45 H	250	35.5	11.5
2	15540.00	46.1 PK	74.0	-27.9	2.52 H	300	34.2	11.9
3	15540.00	34.2 AV	54.0	-19.8	2.52 H	300	22.3	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	50.0 PK	68.2	-18.2	1.32 V	283	38.5	11.5
2	15540.00	49.6 PK	74.0	-24.4	2.80 V	330	37.7	11.9
3	15540.00	36.7 AV	54.0	-17.3	2.80 V	330	24.8	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	46.3 PK	68.2	-21.9	1.45 H	263	34.6	11.7
2	15600.00	46.2 PK	74.0	-27.8	2.50 H	293	34.8	11.4
3	15600.00	34.4 AV	54.0	-19.6	2.50 H	293	23.0	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.9 PK	68.2	-18.3	2.82 V	150	38.2	11.7
2	15600.00	49.6 PK	74.0	-24.4	2.86 V	203	38.2	11.4
3	15600.00	38.0 AV	54.0	-16.0	2.86 V	203	26.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	47.2 PK	68.2	-21.0	1.46 H	258	35.6	11.6
2	15720.00	46.3 PK	74.0	-27.7	2.47 H	314	33.9	12.4
3	15720.00	34.2 AV	54.0	-19.8	2.47 H	314	21.8	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.4 PK	68.2	-18.8	1.17 V	342	37.8	11.6
2	15720.00	49.2 PK	74.0	-24.8	2.01 V	120	36.8	12.4
3	15720.00	37.5 AV	54.0	-16.5	2.01 V	120	25.1	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.0 PK	68.2	-20.2	1.55 H	322	36.3	11.7
2	15780.00	47.1 PK	74.0	-26.9	3.10 H	99	35.0	12.1
3	15780.00	35.0 AV	54.0	-19.0	3.10 H	99	22.9	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	49.4 PK	68.2	-18.8	3.98 V	273	37.7	11.7
2	15780.00	50.1 PK	74.0	-23.9	3.16 V	1	38.0	12.1
3	15780.00	37.5 AV	54.0	-16.5	3.16 V	1	25.4	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.4 PK	74.0	-25.6	1.56 H	309	36.5	11.9
2	10600.00	37.3 AV	54.0	-16.7	1.56 H	309	25.4	11.9
3	15900.00	47.3 PK	74.0	-26.7	3.09 H	113	35.3	12.0
4	15900.00	35.1 AV	54.0	-18.9	3.09 H	113	23.1	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	49.2 PK	74.0	-24.8	2.11 V	344	37.3	11.9
2	10600.00	39.4 AV	54.0	-14.6	2.11 V	344	27.5	11.9
3	15900.00	51.8 PK	74.0	-22.2	3.36 V	354	39.8	12.0
4	15900.00	38.5 AV	54.0	-15.5	3.36 V	354	26.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.3 PK	74.0	-25.7	1.60 H	320	36.1	12.2
2	10640.00	37.8 AV	54.0	-16.2	1.60 H	320	25.6	12.2
3	15960.00	47.0 PK	74.0	-27.0	3.07 H	100	34.7	12.3
4	15960.00	35.0 AV	54.0	-19.0	3.07 H	100	22.7	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.4 PK	74.0	-24.6	1.09 V	286	37.2	12.2
2	10640.00	38.2 AV	54.0	-15.8	1.09 V	286	26.0	12.2
3	15960.00	50.0 PK	74.0	-24.0	1.00 V	330	37.7	12.3
4	15960.00	36.9 AV	54.0	-17.1	1.00 V	330	24.6	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.8 PK	74.0	-25.2	1.52 H	315	36.8	12.0
2	11000.00	37.0 AV	54.0	-17.0	1.52 H	315	25.0	12.0
3	#16500.00	47.5 PK	68.2	-20.7	3.14 H	89	33.5	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.3 PK	74.0	-24.7	3.52 V	188	37.3	12.0
2	11000.00	38.7 AV	54.0	-15.3	3.52 V	188	26.7	12.0
3	#16500.00	48.3 PK	68.2	-19.9	1.67 V	38	34.3	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	47.6 PK	74.0	-26.4	1.56 H	313	35.2	12.4
2	11160.00	37.7 AV	54.0	-16.3	1.56 H	313	25.3	12.4
3	#16740.00	47.3 PK	68.2	-20.9	2.49 H	216	31.6	15.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	50.2 PK	74.0	-23.8	3.99 V	196	37.8	12.4
2	11160.00	38.5 AV	54.0	-15.5	3.99 V	196	26.1	12.4
3	#16740.00	52.4 PK	68.2	-15.8	2.85 V	356	36.7	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.2 PK	74.0	-25.8	1.50 H	322	35.9	12.3
2	11400.00	37.9 AV	54.0	-16.1	1.50 H	322	25.6	12.3
3	#17100.00	46.5 PK	68.2	-21.7	2.22 H	148	30.0	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.6 PK	74.0	-24.4	4.00 V	191	37.3	12.3
2	11400.00	38.6 AV	54.0	-15.4	4.00 V	191	26.3	12.3
3	#17100.00	50.1 PK	68.2	-18.1	2.95 V	265	33.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.3 PK	74.0	-25.7	1.50 H	308	36.0	12.3
2	11440.00	37.7 AV	54.0	-16.3	1.50 H	308	25.4	12.3
3	#17160.00	46.3 PK	68.2	-21.9	2.20 H	138	29.5	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.6 PK	74.0	-24.4	3.99 V	190	37.3	12.3
2	11440.00	39.5 AV	54.0	-14.5	3.99 V	190	27.2	12.3
3	#17160.00	49.9 PK	68.2	-18.3	1.00 V	350	33.1	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	47.7 PK	74.0	-26.3	1.49 H	330	35.4	12.3
2	11490.00	38.3 AV	54.0	-15.7	1.49 H	330	26.0	12.3
3	#17235.00	46.5 PK	68.2	-21.7	2.21 H	144	29.3	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	49.9 PK	74.0	-24.1	1.01 V	210	37.6	12.3
2	11490.00	38.7 AV	54.0	-15.3	1.01 V	210	26.4	12.3
3	#17235.00	51.8 PK	68.2	-16.4	1.00 V	156	34.6	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	49.3 PK	74.0	-24.7	1.47 H	305	37.0	12.3
2	11570.00	38.6 AV	54.0	-15.4	1.47 H	305	26.3	12.3
3	#17355.00	47.1 PK	68.2	-21.1	3.10 H	97	28.8	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	50.1 PK	74.0	-23.9	2.13 V	194	37.8	12.3
2	11570.00	39.4 AV	54.0	-14.6	2.13 V	194	27.1	12.3
3	#17355.00	52.1 PK	68.2	-16.1	1.33 V	20	33.8	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.3 PK	74.0	-25.7	1.53 H	324	36.1	12.2
2	11650.00	38.4 AV	54.0	-15.6	1.53 H	324	26.2	12.2
3	#17475.00	48.0 PK	68.2	-20.2	3.18 H	100	28.3	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	49.7 PK	74.0	-24.3	3.99 V	122	37.5	12.2
2	11650.00	39.2 AV	54.0	-14.8	3.99 V	122	27.0	12.2
3	#17475.00	52.1 PK	68.2	-16.1	3.85 V	141	32.4	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.9 PK	68.2	-19.3	1.51 H	326	37.4	11.5
2	15540.00	47.7 PK	74.0	-26.3	3.14 H	99	35.8	11.9
3	15540.00	35.4 AV	54.0	-18.6	3.14 H	99	23.5	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.5 PK	68.2	-18.7	1.33 V	283	38.0	11.5
2	15540.00	48.9 PK	74.0	-25.1	2.80 V	333	37.0	11.9
3	15540.00	36.2 AV	54.0	-17.8	2.80 V	333	24.3	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	48.2 PK	68.2	-20.0	1.54 H	341	36.5	11.7
2	15600.00	47.1 PK	74.0	-26.9	3.15 H	92	35.7	11.4
3	15600.00	35.3 AV	54.0	-18.7	3.15 H	92	23.9	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	50.1 PK	68.2	-18.1	2.86 V	153	38.4	11.7
2	15600.00	49.6 PK	74.0	-24.4	2.87 V	196	38.2	11.4
3	15600.00	37.7 AV	54.0	-16.3	2.87 V	196	26.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	48.4 PK	68.2	-19.8	1.48 H	333	36.8	11.6
2	15720.00	47.3 PK	74.0	-26.7	3.15 H	112	34.9	12.4
3	15720.00	35.0 AV	54.0	-19.0	3.15 H	112	22.6	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.9 PK	68.2	-18.3	1.21 V	328	38.3	11.6
2	15720.00	48.9 PK	74.0	-25.1	2.06 V	117	36.5	12.4
3	15720.00	37.4 AV	54.0	-16.6	2.06 V	117	25.0	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	49.0 PK	68.2	-19.2	1.45 H	333	37.3	11.7
2	15780.00	47.5 PK	74.0	-26.5	3.18 H	100	35.4	12.1
3	15780.00	35.4 AV	54.0	-18.6	3.18 H	100	23.3	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	49.1 PK	68.2	-19.1	4.00 V	259	37.4	11.7
2	15780.00	50.2 PK	74.0	-23.8	3.21 V	12	38.1	12.1
3	15780.00	37.5 AV	54.0	-16.5	3.21 V	12	25.4	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	49.5 PK	74.0	-24.5	1.57 H	319	37.6	11.9
2	10600.00	37.8 AV	54.0	-16.2	1.57 H	319	25.9	11.9
3	15900.00	47.8 PK	74.0	-26.2	3.12 H	86	35.8	12.0
4	15900.00	35.3 AV	54.0	-18.7	3.12 H	86	23.3	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	50.1 PK	74.0	-23.9	1.18 V	323	38.2	11.9
2	10600.00	39.4 AV	54.0	-14.6	1.18 V	323	27.5	11.9
3	15900.00	48.3 PK	74.0	-25.7	2.05 V	101	36.3	12.0
4	15900.00	37.1 AV	54.0	-16.9	2.05 V	101	25.1	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	1.50 H	323	36.3	12.2
2	10640.00	36.4 AV	54.0	-17.6	1.50 H	323	24.2	12.2
3	15960.00	47.2 PK	74.0	-26.8	3.12 H	103	34.9	12.3
4	15960.00	35.1 AV	54.0	-18.9	3.12 H	103	22.8	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.6 PK	74.0	-24.4	1.23 V	321	37.4	12.2
2	10640.00	38.6 AV	54.0	-15.4	1.23 V	321	26.4	12.2
3	15960.00	49.0 PK	74.0	-25.0	2.01 V	106	36.7	12.3
4	15960.00	37.6 AV	54.0	-16.4	2.01 V	106	25.3	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.7 PK	74.0	-25.3	1.56 H	317	36.7	12.0
2	11000.00	37.1 AV	54.0	-16.9	1.56 H	317	25.1	12.0
3	#16500.00	47.6 PK	68.2	-20.6	3.11 H	93	33.6	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.9 PK	74.0	-24.1	1.22 V	340	37.9	12.0
2	11000.00	38.8 AV	54.0	-15.2	1.22 V	340	26.8	12.0
3	#16500.00	49.2 PK	68.2	-19.0	2.09 V	128	35.2	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	49.1 PK	74.0	-24.9	1.53 H	313	36.7	12.4
2	11160.00	38.0 AV	54.0	-16.0	1.53 H	313	25.6	12.4
3	#16740.00	47.7 PK	68.2	-20.5	3.18 H	92	32.0	15.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	50.1 PK	74.0	-23.9	1.00 V	208	37.7	12.4
2	11160.00	39.4 AV	54.0	-14.6	1.00 V	208	27.0	12.4
3	#16740.00	52.1 PK	68.2	-16.1	1.03 V	153	36.4	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.2 PK	74.0	-24.8	1.56 H	331	36.9	12.3
2	11400.00	37.6 AV	54.0	-16.4	1.56 H	331	25.3	12.3
3	#17100.00	48.2 PK	68.2	-20.0	3.18 H	100	31.7	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.5 PK	74.0	-24.5	1.04 V	226	37.2	12.3
2	11400.00	39.2 AV	54.0	-14.8	1.04 V	226	26.9	12.3
3	#17100.00	52.5 PK	68.2	-15.7	1.05 V	169	36.0	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.4 PK	74.0	-24.6	1.51 H	329	37.1	12.3
2	11440.00	38.5 AV	54.0	-15.5	1.51 H	329	26.2	12.3
3	#17160.00	48.3 PK	68.2	-19.9	3.14 H	100	31.5	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.1 PK	74.0	-23.9	1.01 V	225	37.8	12.3
2	11440.00	39.6 AV	54.0	-14.4	1.01 V	225	27.3	12.3
3	#17160.00	52.0 PK	68.2	-16.2	1.00 V	151	35.2	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	48.9 PK	74.0	-25.1	1.46 H	310	36.6	12.3
2	11490.00	37.2 AV	54.0	-16.8	1.46 H	310	24.9	12.3
3	#17235.00	47.6 PK	68.2	-20.6	3.19 H	104	30.4	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	49.7 PK	74.0	-24.3	1.02 V	208	37.4	12.3
2	11490.00	39.3 AV	54.0	-14.7	1.02 V	208	27.0	12.3
3	#17235.00	52.5 PK	68.2	-15.7	1.04 V	163	35.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	49.6 PK	74.0	-24.4	1.50 H	319	37.3	12.3
2	11570.00	38.3 AV	54.0	-15.7	1.50 H	319	26.0	12.3
3	#17355.00	47.8 PK	68.2	-20.4	3.20 H	103	29.5	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	50.0 PK	74.0	-24.0	1.00 V	202	37.7	12.3
2	11570.00	39.7 AV	54.0	-14.3	1.00 V	202	27.4	12.3
3	#17355.00	51.5 PK	68.2	-16.7	1.05 V	142	33.2	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	49.3 PK	74.0	-24.7	1.41 H	302	37.1	12.2
2	11650.00	38.1 AV	54.0	-15.9	1.41 H	302	25.9	12.2
3	#17475.00	48.2 PK	68.2	-20.0	3.19 H	92	28.5	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	50.0 PK	74.0	-24.0	1.00 V	197	37.8	12.2
2	11650.00	39.4 AV	54.0	-14.6	1.00 V	197	27.2	12.2
3	#17475.00	51.8 PK	68.2	-16.4	1.00 V	170	32.1	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	49.2 PK	68.2	-19.0	1.36 H	293	37.6	11.6
2	15570.00	48.2 PK	74.0	-25.8	3.21 H	106	36.5	11.7
3	15570.00	35.8 AV	54.0	-18.2	3.21 H	106	24.1	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	49.6 PK	68.2	-18.6	1.00 V	204	38.0	11.6
2	15570.00	51.5 PK	74.0	-22.5	1.00 V	183	39.8	11.7
3	15570.00	37.6 AV	54.0	-16.4	1.00 V	183	25.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	49.6 PK	68.2	-18.6	1.39 H	312	37.8	11.8
2	15690.00	47.9 PK	74.0	-26.1	3.24 H	91	35.5	12.4
3	15690.00	35.9 AV	54.0	-18.1	3.24 H	91	23.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	50.1 PK	68.2	-18.1	1.00 V	213	38.3	11.8
2	15690.00	51.8 PK	74.0	-22.2	1.00 V	160	39.4	12.4
3	15690.00	37.9 AV	54.0	-16.1	1.00 V	160	25.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	48.8 PK	68.2	-19.4	1.37 H	299	37.0	11.8
2	15810.00	48.0 PK	74.0	-26.0	3.14 H	77	36.1	11.9
3	15810.00	35.9 AV	54.0	-18.1	3.14 H	77	24.0	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	49.2 PK	68.2	-19.0	1.00 V	188	37.4	11.8
2	15810.00	52.1 PK	74.0	-21.9	1.00 V	158	40.2	11.9
3	15810.00	38.4 AV	54.0	-15.6	1.00 V	158	26.5	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	49.4 PK	74.0	-24.6	1.42 H	298	37.4	12.0
2	10620.00	38.3 AV	54.0	-15.7	1.42 H	298	26.3	12.0
3	15930.00	48.5 PK	74.0	-25.5	3.20 H	87	36.3	12.2
4	15930.00	36.3 AV	54.0	-17.7	3.20 H	87	24.1	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	49.8 PK	74.0	-24.2	1.00 V	194	37.8	12.0
2	10620.00	39.4 AV	54.0	-14.6	1.00 V	194	27.4	12.0
3	15930.00	52.1 PK	74.0	-21.9	1.00 V	180	39.9	12.2
4	15930.00	38.4 AV	54.0	-15.6	1.00 V	180	26.2	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	49.4 PK	74.0	-24.6	1.46 H	304	37.3	12.1
2	11020.00	38.4 AV	54.0	-15.6	1.46 H	304	26.3	12.1
3	#16530.00	48.4 PK	68.2	-19.8	3.23 H	102	34.0	14.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	50.0 PK	74.0	-24.0	1.00 V	202	37.9	12.1
2	11020.00	39.1 AV	54.0	-14.9	1.00 V	202	27.0	12.1
3	#16530.00	51.2 PK	68.2	-17.0	1.02 V	181	36.8	14.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	48.7 PK	74.0	-25.3	1.37 H	300	36.2	12.5
2	11100.00	37.7 AV	54.0	-16.3	1.37 H	300	25.2	12.5
3	#16650.00	48.2 PK	68.2	-20.0	3.19 H	105	32.8	15.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	49.4 PK	74.0	-24.6	1.00 V	205	36.9	12.5
2	11100.00	39.0 AV	54.0	-15.0	1.00 V	205	26.5	12.5
3	#16650.00	51.6 PK	68.2	-16.6	1.00 V	168	36.2	15.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 118 : 5590 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11180.00	48.2 PK	74.0	-25.8	1.35 H	313	35.9	12.3
2	11180.00	37.2 AV	54.0	-16.8	1.35 H	313	24.9	12.3
3	#16770.00	47.8 PK	68.2	-20.4	3.18 H	116	32.1	15.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11180.00	49.1 PK	74.0	-24.9	1.02 V	214	36.8	12.3
2	11180.00	38.9 AV	54.0	-15.1	1.02 V	214	26.6	12.3
3	#16770.00	51.1 PK	68.2	-17.1	2.14 V	159	35.4	15.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	49.3 PK	74.0	-24.7	1.41 H	303	37.3	12.0
2	11340.00	38.1 AV	54.0	-15.9	1.41 H	303	26.1	12.0
3	#17010.00	47.9 PK	68.2	-20.3	3.18 H	77	31.8	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	50.3 PK	74.0	-23.7	1.00 V	190	38.3	12.0
2	11340.00	39.6 AV	54.0	-14.4	1.00 V	190	27.6	12.0
3	#17010.00	52.0 PK	68.2	-16.2	1.02 V	168	35.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	49.1 PK	74.0	-24.9	1.35 H	315	36.9	12.2
2	11420.00	37.9 AV	54.0	-16.1	1.35 H	315	25.7	12.2
3	#17130.00	48.0 PK	68.2	-20.2	3.23 H	107	31.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	50.2 PK	74.0	-23.8	1.00 V	184	38.0	12.2
2	11420.00	39.5 AV	54.0	-14.5	1.00 V	184	27.3	12.2
3	#17130.00	51.9 PK	68.2	-16.3	1.02 V	177	35.1	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	49.7 PK	74.0	-24.3	1.45 H	310	37.3	12.4
2	11510.00	38.5 AV	54.0	-15.5	1.45 H	310	26.1	12.4
3	#17265.00	47.8 PK	68.2	-20.4	3.14 H	87	30.5	17.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	50.3 PK	74.0	-23.7	1.00 V	210	37.9	12.4
2	11510.00	39.9 AV	54.0	-14.1	1.00 V	210	27.5	12.4
3	#17265.00	52.1 PK	68.2	-16.1	1.00 V	158	34.8	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	49.0 PK	74.0	-25.0	1.42 H	318	36.7	12.3
2	11590.00	38.1 AV	54.0	-15.9	1.42 H	318	25.8	12.3
3	#17385.00	48.1 PK	68.2	-20.1	3.14 H	108	29.4	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	49.9 PK	74.0	-24.1	1.00 V	200	37.6	12.3
2	11590.00	39.4 AV	54.0	-14.6	1.00 V	200	27.1	12.3
3	#17385.00	51.7 PK	68.2	-16.5	1.00 V	165	33.0	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	49.8 PK	68.2	-18.4	1.47 H	312	38.1	11.7
2	15630.00	47.8 PK	74.0	-26.2	3.17 H	96	36.1	11.7
3	15630.00	35.6 AV	54.0	-18.4	3.17 H	96	23.9	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	49.3 PK	68.2	-18.9	1.00 V	208	37.6	11.7
2	15630.00	51.7 PK	74.0	-22.3	1.00 V	163	40.0	11.7
3	15630.00	37.6 AV	54.0	-16.4	1.00 V	163	25.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.8 PK	68.2	-18.4	2.22 H	300	37.9	11.9
2	15870.00	48.4 PK	74.0	-25.6	2.14 H	254	36.5	11.9
3	15870.00	35.8 AV	54.0	-18.2	2.14 H	254	23.9	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.6 PK	68.2	-18.6	1.00 V	189	37.7	11.9
2	15870.00	52.0 PK	74.0	-22.0	1.00 V	181	40.1	11.9
3	15870.00	38.4 AV	54.0	-15.6	1.00 V	181	26.5	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	49.4 PK	74.0	-24.6	2.27 H	312	37.1	12.3
2	11060.00	37.9 AV	54.0	-16.1	2.27 H	312	25.6	12.3
3	#16590.00	48.3 PK	68.2	-19.9	2.10 H	267	33.2	15.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	50.2 PK	74.0	-23.8	1.00 V	195	37.9	12.3
2	11060.00	39.9 AV	54.0	-14.1	1.00 V	195	27.6	12.3
3	#16590.00	51.5 PK	68.2	-16.7	1.00 V	164	36.4	15.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.9 PK	74.0	-24.1	2.17 H	309	37.7	12.2
2	11220.00	38.2 AV	54.0	-15.8	2.17 H	309	26.0	12.2
3	#16830.00	48.2 PK	68.2	-20.0	2.12 H	269	32.0	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.4 PK	74.0	-24.6	1.00 V	208	37.2	12.2
2	11220.00	39.0 AV	54.0	-15.0	1.00 V	208	26.8	12.2
3	#16830.00	51.5 PK	68.2	-16.7	1.00 V	162	35.3	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	50.0 PK	74.0	-24.0	2.20 H	311	37.8	12.2
2	11380.00	38.6 AV	54.0	-15.4	2.20 H	311	26.4	12.2
3	#17070.00	48.4 PK	68.2	-19.8	2.14 H	269	31.9	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	50.2 PK	74.0	-23.8	1.00 V	188	38.0	12.2
2	11380.00	39.7 AV	54.0	-14.3	1.00 V	188	27.5	12.2
3	#17070.00	52.0 PK	68.2	-16.2	1.00 V	177	35.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	49.9 PK	74.0	-24.1	2.25 H	306	37.6	12.3
2	11550.00	38.1 AV	54.0	-15.9	2.25 H	306	25.8	12.3
3	#17325.00	49.0 PK	68.2	-19.2	2.15 H	264	31.1	17.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	50.2 PK	74.0	-23.8	1.00 V	208	37.9	12.3
2	11550.00	39.4 AV	54.0	-14.6	1.00 V	208	27.1	12.3
3	#17325.00	52.0 PK	68.2	-16.2	1.00 V	176	34.1	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	50.4 PK	68.2	-17.8	2.27 H	286	38.7	11.7
2	15750.00	48.3 PK	74.0	-25.7	2.13 H	264	36.1	12.2
3	15750.00	35.6 AV	54.0	-18.4	2.13 H	264	23.4	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	50.0 PK	68.2	-18.2	1.00 V	211	38.3	11.7
2	15750.00	52.2 PK	74.0	-21.8	1.00 V	164	40.0	12.2
3	15750.00	38.4 AV	54.0	-15.6	1.00 V	164	26.2	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	49.6 PK	74.0	-24.4	2.17 H	295	37.2	12.4
2	11140.00	37.9 AV	54.0	-16.1	2.17 H	295	25.5	12.4
3	#16710.00	47.9 PK	68.2	-20.3	2.11 H	251	32.3	15.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	50.0 PK	74.0	-24.0	1.00 V	197	37.6	12.4
2	11140.00	39.7 AV	54.0	-14.3	1.00 V	197	27.3	12.4
3	#16710.00	52.1 PK	68.2	-16.1	1.00 V	170	36.5	15.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.5 PK	68.2	-18.7	1.96 H	348	38.0	11.5
2	15540.00	48.3 PK	74.0	-25.7	2.51 H	100	36.4	11.9
3	15540.00	36.1 AV	54.0	-17.9	2.51 H	100	24.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	50.7 PK	68.2	-17.5	1.59 V	333	39.2	11.5
2	15540.00	49.6 PK	74.0	-24.4	1.60 V	248	37.7	11.9
3	15540.00	37.0 AV	54.0	-17.0	1.60 V	248	25.1	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.7 PK	74.0	-25.3	1.54 H	341	36.5	12.2
2	10640.00	37.6 AV	54.0	-16.4	1.54 H	341	25.4	12.2
3	15960.00	47.6 PK	74.0	-26.4	3.15 H	92	35.3	12.3
4	15960.00	36.0 AV	54.0	-18.0	3.15 H	92	23.7	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	50.7 PK	74.0	-23.3	3.00 V	166	38.5	12.2
2	10640.00	39.4 AV	54.0	-14.6	3.00 V	166	27.2	12.2
3	15960.00	50.1 PK	74.0	-23.9	1.48 V	200	37.8	12.3
4	15960.00	38.5 AV	54.0	-15.5	1.48 V	200	26.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.6 PK	74.0	-24.4	1.79 H	200	37.6	12.0
2	11000.00	38.0 AV	54.0	-16.0	1.79 H	200	26.0	12.0
3	#16500.00	48.1 PK	68.2	-20.1	1.16 H	154	34.1	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	50.6 PK	74.0	-23.4	1.47 V	321	38.6	12.0
2	11000.00	39.4 AV	54.0	-14.6	1.47 V	321	27.4	12.0
3	#16500.00	50.0 PK	68.2	-18.2	3.00 V	198	36.0	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	46.4 PK	74.0	-27.6	2.18 H	316	34.1	12.3
2	11400.00	37.0 AV	54.0	-17.0	2.18 H	316	24.7	12.3
3	#17100.00	44.9 PK	68.2	-23.3	2.20 H	193	28.4	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	51.2 PK	74.0	-22.8	1.51 V	330	38.9	12.3
2	11400.00	39.8 AV	54.0	-14.2	1.51 V	330	27.5	12.3
3	#17100.00	49.9 PK	68.2	-18.3	3.03 V	198	33.4	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	47.3 PK	74.0	-26.7	1.15 H	320	35.0	12.3
2	11440.00	37.0 AV	54.0	-17.0	1.15 H	320	24.7	12.3
3	#17160.00	44.1 PK	68.2	-24.1	1.00 H	180	27.3	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.1 PK	74.0	-22.9	1.46 V	330	38.8	12.3
2	11440.00	39.9 AV	54.0	-14.1	1.46 V	330	27.6	12.3
3	#17160.00	50.1 PK	68.2	-18.1	3.00 V	184	33.3	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	46.9 PK	74.0	-27.1	1.20 H	327	34.6	12.3
2	11490.00	37.9 AV	54.0	-16.1	1.20 H	327	25.6	12.3
3	#17235.00	44.8 PK	68.2	-23.4	1.00 H	179	27.6	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	51.4 PK	74.0	-22.6	1.42 V	314	39.1	12.3
2	11490.00	39.9 AV	54.0	-14.1	1.42 V	314	27.6	12.3
3	#17235.00	49.4 PK	68.2	-18.8	3.04 V	193	32.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	47.9 PK	74.0	-26.1	1.15 H	334	35.7	12.2
2	11650.00	37.1 AV	54.0	-16.9	1.15 H	334	24.9	12.2
3	#17475.00	44.5 PK	68.2	-23.7	1.00 H	195	24.8	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	50.8 PK	74.0	-23.2	1.52 V	328	38.6	12.2
2	11650.00	39.4 AV	54.0	-14.6	1.52 V	328	27.2	12.2
3	#17475.00	49.7 PK	68.2	-18.5	3.04 V	195	30.0	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	47.4 PK	68.2	-20.8	1.16 H	319	35.9	11.5
2	15540.00	43.5 PK	74.0	-30.5	1.03 H	168	31.6	11.9
3	15540.00	33.8 AV	54.0	-20.2	1.03 H	168	21.9	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	51.3 PK	68.2	-16.9	1.50 V	325	39.8	11.5
2	15540.00	50.2 PK	74.0	-23.8	3.01 V	206	38.3	11.9
3	15540.00	38.4 AV	54.0	-15.6	3.01 V	206	26.5	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	47.5 PK	74.0	-26.5	1.17 H	313	35.3	12.2
2	10640.00	37.5 AV	54.0	-16.5	1.17 H	313	25.3	12.2
3	15960.00	44.0 PK	74.0	-30.0	1.00 H	183	31.7	12.3
4	15960.00	34.3 AV	54.0	-19.7	1.00 H	183	22.0	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	50.8 PK	74.0	-23.2	1.50 V	308	38.6	12.2
2	10640.00	39.8 AV	54.0	-14.2	1.50 V	308	27.6	12.2
3	15960.00	50.2 PK	74.0	-23.8	2.97 V	196	37.9	12.3
4	15960.00	38.2 AV	54.0	-15.8	2.97 V	196	25.9	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	47.0 PK	74.0	-27.0	1.21 H	312	35.0	12.0
2	11000.00	36.8 AV	54.0	-17.2	1.21 H	312	24.8	12.0
3	#16500.00	43.7 PK	68.2	-24.5	1.00 H	189	29.7	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	51.0 PK	74.0	-23.0	1.48 V	307	39.0	12.0
2	11000.00	39.6 AV	54.0	-14.4	1.48 V	307	27.6	12.0
3	#16500.00	50.0 PK	68.2	-18.2	2.98 V	195	36.0	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	47.3 PK	74.0	-26.7	1.18 H	322	35.0	12.3
2	11400.00	37.4 AV	54.0	-16.6	1.18 H	322	25.1	12.3
3	#17100.00	44.5 PK	68.2	-23.7	1.05 H	194	28.0	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	51.2 PK	74.0	-22.8	1.46 V	319	38.9	12.3
2	11400.00	39.7 AV	54.0	-14.3	1.46 V	319	27.4	12.3
3	#17100.00	50.2 PK	68.2	-18.0	3.01 V	209	33.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.0 PK	74.0	-26.0	1.19 H	323	35.7	12.3
2	11440.00	37.0 AV	54.0	-17.0	1.19 H	323	24.7	12.3
3	#17160.00	44.2 PK	68.2	-24.0	1.00 H	186	27.4	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.5 PK	74.0	-23.5	1.51 V	319	38.2	12.3
2	11440.00	39.2 AV	54.0	-14.8	1.51 V	319	26.9	12.3
3	#17160.00	49.9 PK	68.2	-18.3	3.01 V	184	33.1	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	47.8 PK	74.0	-26.2	1.59 H	300	35.5	12.3
2	11490.00	36.7 AV	54.0	-17.3	1.59 H	300	24.4	12.3
3	#17235.00	45.8 PK	68.2	-22.4	1.89 H	147	28.6	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	50.9 PK	74.0	-23.1	1.48 V	328	38.6	12.3
2	11490.00	39.5 AV	54.0	-14.5	1.48 V	328	27.2	12.3
3	#17235.00	49.7 PK	68.2	-18.5	2.97 V	175	32.5	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	47.5 PK	74.0	-26.5	1.55 H	294	35.3	12.2
2	11650.00	36.4 AV	54.0	-17.6	1.55 H	294	24.2	12.2
3	#17475.00	46.1 PK	68.2	-22.1	1.87 H	160	26.4	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	51.2 PK	74.0	-22.8	1.50 V	307	39.0	12.2
2	11650.00	39.6 AV	54.0	-14.4	1.50 V	307	27.4	12.2
3	#17475.00	49.4 PK	68.2	-18.8	3.04 V	192	29.7	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.3 PK	68.2	-19.9	1.63 H	313	36.8	11.5
2	15540.00	46.0 PK	74.0	-28.0	1.89 H	145	34.1	11.9
3	15540.00	34.3 AV	54.0	-19.7	1.89 H	145	22.4	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	50.2 PK	68.2	-18.0	1.49 V	320	38.7	11.5
2	15540.00	49.8 PK	74.0	-24.2	3.04 V	183	37.9	11.9
3	15540.00	38.0 AV	54.0	-16.0	3.04 V	183	26.1	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	47.2 PK	74.0	-26.8	1.54 H	296	35.0	12.2
2	10640.00	36.4 AV	54.0	-17.6	1.54 H	296	24.2	12.2
3	15960.00	45.7 PK	74.0	-28.3	1.83 H	162	33.4	12.3
4	15960.00	33.5 AV	54.0	-20.5	1.83 H	162	21.2	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	51.1 PK	74.0	-22.9	1.51 V	318	38.9	12.2
2	10640.00	39.5 AV	54.0	-14.5	1.51 V	318	27.3	12.2
3	15960.00	49.8 PK	74.0	-24.2	2.94 V	173	37.5	12.3
4	15960.00	37.7 AV	54.0	-16.3	2.94 V	173	25.4	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.0 PK	74.0	-26.0	1.55 H	293	36.0	12.0
2	11000.00	36.9 AV	54.0	-17.1	1.55 H	293	24.9	12.0
3	#16500.00	46.4 PK	68.2	-21.8	1.83 H	141	32.4	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	51.4 PK	74.0	-22.6	1.46 V	315	39.4	12.0
2	11000.00	39.8 AV	54.0	-14.2	1.46 V	315	27.8	12.0
3	#16500.00	49.9 PK	68.2	-18.3	2.93 V	174	35.9	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.2 PK	74.0	-25.8	1.63 H	288	35.9	12.3
2	11400.00	36.8 AV	54.0	-17.2	1.63 H	288	24.5	12.3
3	#17100.00	46.1 PK	68.2	-22.1	1.90 H	154	29.6	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.0 PK	74.0	-24.0	1.54 V	234	37.7	12.3
2	11400.00	38.6 AV	54.0	-15.4	1.54 V	234	26.3	12.3
3	#17100.00	47.0 PK	68.2	-21.2	3.08 V	185	30.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	47.5 PK	74.0	-26.5	1.54 H	300	35.2	12.3
2	11440.00	36.3 AV	54.0	-17.7	1.54 H	300	24.0	12.3
3	#17160.00	45.6 PK	68.2	-22.6	1.86 H	156	28.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.1 PK	74.0	-24.9	1.54 V	222	36.8	12.3
2	11440.00	38.2 AV	54.0	-15.8	1.54 V	222	25.9	12.3
3	#17160.00	46.3 PK	68.2	-21.9	3.07 V	185	29.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	48.4 PK	74.0	-25.6	1.59 H	302	36.1	12.3
2	11490.00	37.1 AV	54.0	-16.9	1.59 H	302	24.8	12.3
3	#17235.00	45.7 PK	68.2	-22.5	1.94 H	139	28.5	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	50.1 PK	74.0	-23.9	1.54 V	228	37.8	12.3
2	11490.00	38.8 AV	54.0	-15.2	1.54 V	228	26.5	12.3
3	#17235.00	46.7 PK	68.2	-21.5	3.12 V	160	29.5	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	47.7 PK	74.0	-26.3	1.56 H	303	35.5	12.2
2	11650.00	36.6 AV	54.0	-17.4	1.56 H	303	24.4	12.2
3	#17475.00	45.7 PK	68.2	-22.5	1.85 H	160	26.0	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	49.3 PK	74.0	-24.7	1.58 V	234	37.1	12.2
2	11650.00	38.2 AV	54.0	-15.8	1.58 V	234	26.0	12.2
3	#17475.00	47.0 PK	68.2	-21.2	3.09 V	160	27.3	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.1 PK	68.2	-20.1	1.97 H	258	36.6	11.5
2	15540.00	45.0 PK	74.0	-29.0	2.95 H	206	33.1	11.9
3	15540.00	34.1 AV	54.0	-19.9	2.95 H	206	22.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.9 PK	68.2	-19.3	1.48 V	238	37.4	11.5
2	15540.00	47.3 PK	74.0	-26.7	3.13 V	166	35.4	11.9
3	15540.00	35.4 AV	54.0	-18.6	3.13 V	166	23.5	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	47.8 PK	74.0	-26.2	1.98 H	247	35.6	12.2
2	10640.00	35.9 AV	54.0	-18.1	1.98 H	247	23.7	12.2
3	15960.00	45.3 PK	74.0	-28.7	3.06 H	210	33.0	12.3
4	15960.00	34.1 AV	54.0	-19.9	3.06 H	210	21.8	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.3 PK	74.0	-24.7	1.54 V	245	37.1	12.2
2	10640.00	38.1 AV	54.0	-15.9	1.54 V	245	25.9	12.2
3	15960.00	47.6 PK	74.0	-26.4	3.13 V	182	35.3	12.3
4	15960.00	34.7 AV	54.0	-19.3	3.13 V	182	22.4	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	47.4 PK	74.0	-26.6	1.92 H	235	35.4	12.0
2	11000.00	36.4 AV	54.0	-17.6	1.92 H	235	24.4	12.0
3	#16500.00	45.8 PK	68.2	-22.4	3.06 H	201	31.8	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.5 PK	74.0	-24.5	1.53 V	252	37.5	12.0
2	11000.00	38.3 AV	54.0	-15.7	1.53 V	252	26.3	12.0
3	#16500.00	48.1 PK	68.2	-20.1	3.15 V	171	34.1	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.3 PK	74.0	-25.7	1.93 H	246	36.0	12.3
2	11400.00	36.8 AV	54.0	-17.2	1.93 H	246	24.5	12.3
3	#17100.00	44.8 PK	68.2	-23.4	2.98 H	184	28.3	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.7 PK	74.0	-25.3	1.56 V	230	36.4	12.3
2	11400.00	37.7 AV	54.0	-16.3	1.56 V	230	25.4	12.3
3	#17100.00	48.0 PK	68.2	-20.2	3.10 V	187	31.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	47.2 PK	74.0	-26.8	1.98 H	245	34.9	12.3
2	11440.00	35.5 AV	54.0	-18.5	1.98 H	245	23.2	12.3
3	#17160.00	45.5 PK	68.2	-22.7	3.05 H	215	28.7	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.4 PK	74.0	-24.6	1.58 V	237	37.1	12.3
2	11440.00	38.4 AV	54.0	-15.6	1.58 V	237	26.1	12.3
3	#17160.00	47.8 PK	68.2	-20.4	3.17 V	192	31.0	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	47.4 PK	74.0	-26.6	2.03 H	243	35.1	12.3
2	11490.00	35.5 AV	54.0	-18.5	2.03 H	243	23.2	12.3
3	#17235.00	45.2 PK	68.2	-23.0	3.03 H	207	28.0	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	48.9 PK	74.0	-25.1	1.51 V	229	36.6	12.3
2	11490.00	37.9 AV	54.0	-16.1	1.51 V	229	25.6	12.3
3	#17235.00	48.1 PK	68.2	-20.1	3.11 V	178	30.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	47.8 PK	74.0	-26.2	1.92 H	239	35.6	12.2
2	11650.00	35.9 AV	54.0	-18.1	1.92 H	239	23.7	12.2
3	#17475.00	45.8 PK	68.2	-22.4	3.02 H	201	26.1	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	49.8 PK	74.0	-24.2	1.60 V	251	37.6	12.2
2	11650.00	38.4 AV	54.0	-15.6	1.60 V	251	26.2	12.2
3	#17475.00	47.2 PK	68.2	-21.0	3.13 V	189	27.5	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.1 PK	68.2	-20.1	1.53 H	308	36.6	11.5
2	15540.00	45.6 PK	74.0	-28.4	1.86 H	162	33.7	11.9
3	15540.00	33.6 AV	54.0	-20.4	1.86 H	162	21.7	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.9 PK	68.2	-18.3	1.56 V	234	38.4	11.5
2	15540.00	47.3 PK	74.0	-26.7	3.10 V	174	35.4	11.9
3	15540.00	35.2 AV	54.0	-18.8	3.10 V	174	23.3	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	47.9 PK	74.0	-26.1	1.59 H	295	35.7	12.2
2	10640.00	36.9 AV	54.0	-17.1	1.59 H	295	24.7	12.2
3	15960.00	46.0 PK	74.0	-28.0	1.86 H	151	33.7	12.3
4	15960.00	33.8 AV	54.0	-20.2	1.86 H	151	21.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.9 PK	74.0	-25.1	1.60 V	233	36.7	12.2
2	10640.00	38.0 AV	54.0	-16.0	1.60 V	233	25.8	12.2
3	15960.00	46.8 PK	74.0	-27.2	3.06 V	179	34.5	12.3
4	15960.00	34.6 AV	54.0	-19.4	3.06 V	179	22.3	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	47.5 PK	74.0	-26.5	1.97 H	248	35.5	12.0
2	11000.00	36.3 AV	54.0	-17.7	1.97 H	248	24.3	12.0
3	#16500.00	45.0 PK	68.2	-23.2	3.00 H	200	31.0	14.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.4 PK	74.0	-24.6	1.52 V	220	37.4	12.0
2	11000.00	38.2 AV	54.0	-15.8	1.52 V	220	26.2	12.0
3	#16500.00	46.6 PK	68.2	-21.6	3.09 V	173	32.6	14.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.0 PK	74.0	-26.0	1.96 H	240	35.7	12.3
2	11400.00	36.7 AV	54.0	-17.3	1.96 H	240	24.4	12.3
3	#17100.00	45.3 PK	68.2	-22.9	2.96 H	201	28.8	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.0 PK	74.0	-24.0	1.56 V	227	37.7	12.3
2	11400.00	38.7 AV	54.0	-15.3	1.56 V	227	26.4	12.3
3	#17100.00	47.2 PK	68.2	-21.0	3.05 V	177	30.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	47.3 PK	74.0	-26.7	1.98 H	248	35.0	12.3
2	11440.00	36.1 AV	54.0	-17.9	1.98 H	248	23.8	12.3
3	#17160.00	45.2 PK	68.2	-23.0	3.02 H	201	28.4	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.3 PK	74.0	-24.7	1.52 V	218	37.0	12.3
2	11440.00	38.2 AV	54.0	-15.8	1.52 V	218	25.9	12.3
3	#17160.00	47.1 PK	68.2	-21.1	3.11 V	168	30.3	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	47.5 PK	74.0	-26.5	2.00 H	246	35.2	12.3
2	11490.00	36.1 AV	54.0	-17.9	2.00 H	246	23.8	12.3
3	#17235.00	45.0 PK	68.2	-23.2	2.99 H	202	27.8	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	50.1 PK	74.0	-23.9	1.49 V	233	37.8	12.3
2	11490.00	38.7 AV	54.0	-15.3	1.49 V	233	26.4	12.3
3	#17235.00	47.5 PK	68.2	-20.7	3.09 V	173	30.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	47.8 PK	74.0	-26.2	1.97 H	247	35.6	12.2
2	11650.00	36.6 AV	54.0	-17.4	1.97 H	247	24.4	12.2
3	#17475.00	44.7 PK	68.2	-23.5	3.04 H	198	25.0	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	49.0 PK	74.0	-25.0	1.60 V	221	36.8	12.2
2	11650.00	38.0 AV	54.0	-16.0	1.60 V	221	25.8	12.2
3	#17475.00	47.0 PK	68.2	-21.2	3.12 V	167	27.3	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.3 PK	68.2	-19.9	2.03 H	257	36.6	11.7
2	15630.00	45.4 PK	74.0	-28.6	3.00 H	223	33.7	11.7
3	15630.00	34.3 AV	54.0	-19.7	3.00 H	223	22.6	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.8 PK	68.2	-19.4	1.59 V	236	37.1	11.7
2	15630.00	47.7 PK	74.0	-26.3	3.18 V	181	36.0	11.7
3	15630.00	34.9 AV	54.0	-19.1	3.18 V	181	23.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	47.9 PK	68.2	-20.3	2.01 H	237	36.0	11.9
2	15870.00	45.1 PK	74.0	-28.9	3.02 H	205	33.2	11.9
3	15870.00	34.0 AV	54.0	-20.0	3.02 H	205	22.1	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.2 PK	68.2	-19.0	1.56 V	248	37.3	11.9
2	15870.00	48.2 PK	74.0	-25.8	3.07 V	182	36.3	11.9
3	15870.00	35.2 AV	54.0	-18.8	3.07 V	182	23.3	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	48.2 PK	74.0	-25.8	2.00 H	243	35.9	12.3
2	11060.00	36.4 AV	54.0	-17.6	2.00 H	243	24.1	12.3
3	#16590.00	44.7 PK	68.2	-23.5	3.07 H	223	29.6	15.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	49.5 PK	74.0	-24.5	1.50 V	237	37.2	12.3
2	11060.00	38.3 AV	54.0	-15.7	1.50 V	237	26.0	12.3
3	#16590.00	47.8 PK	68.2	-20.4	3.09 V	180	32.7	15.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	48.1 PK	74.0	-25.9	2.06 H	252	35.9	12.2
2	11220.00	36.4 AV	54.0	-17.6	2.06 H	252	24.2	12.2
3	#16830.00	44.5 PK	68.2	-23.7	3.11 H	225	28.3	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.3 PK	74.0	-24.7	1.52 V	229	37.1	12.2
2	11220.00	38.0 AV	54.0	-16.0	1.52 V	229	25.8	12.2
3	#16830.00	47.6 PK	68.2	-20.6	3.06 V	167	31.4	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	47.3 PK	74.0	-26.7	1.93 H	236	35.1	12.2
2	11380.00	35.4 AV	54.0	-18.6	1.93 H	236	23.2	12.2
3	#17070.00	44.9 PK	68.2	-23.3	3.06 H	220	28.4	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	49.4 PK	74.0	-24.6	1.57 V	235	37.2	12.2
2	11380.00	38.1 AV	54.0	-15.9	1.57 V	235	25.9	12.2
3	#17070.00	48.0 PK	68.2	-20.2	3.08 V	191	31.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	48.1 PK	74.0	-25.9	1.99 H	251	35.8	12.3
2	11550.00	36.2 AV	54.0	-17.8	1.99 H	251	23.9	12.3
3	#17325.00	45.2 PK	68.2	-23.0	3.02 H	211	27.3	17.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	48.6 PK	74.0	-25.4	1.54 V	234	36.3	12.3
2	11550.00	37.6 AV	54.0	-16.4	1.54 V	234	25.3	12.3
3	#17325.00	47.4 PK	68.2	-20.8	3.12 V	179	29.5	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	47.6 PK	68.2	-20.6	1.96 H	239	35.9	11.7
2	15750.00	45.9 PK	74.0	-28.1	3.11 H	209	33.7	12.2
3	15750.00	34.5 AV	54.0	-19.5	3.11 H	209	22.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	49.2 PK	68.2	-19.0	1.58 V	260	37.5	11.7
2	15750.00	47.5 PK	74.0	-26.5	3.12 V	179	35.3	12.2
3	15750.00	34.3 AV	54.0	-19.7	3.12 V	179	22.1	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	47.3 PK	74.0	-26.7	1.99 H	249	34.9	12.4
2	11140.00	35.6 AV	54.0	-18.4	1.99 H	249	23.2	12.4
3	#16710.00	45.3 PK	68.2	-22.9	3.10 H	195	29.7	15.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.9 PK	74.0	-25.1	1.55 V	260	36.5	12.4
2	11140.00	37.8 AV	54.0	-16.2	1.55 V	260	25.4	12.4
3	#16710.00	47.6 PK	68.2	-20.6	3.09 V	177	32.0	15.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	47.8 PK	68.2	-20.4	1.94 H	233	36.1	11.7
2	15750.00	45.3 PK	74.0	-28.7	3.07 H	208	33.1	12.2
3	15750.00	34.0 AV	54.0	-20.0	3.07 H	208	21.8	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	49.9 PK	68.2	-18.3	1.50 V	243	38.2	11.7
2	15750.00	47.2 PK	74.0	-26.8	3.15 V	191	35.0	12.2
3	15750.00	34.4 AV	54.0	-19.6	3.15 V	191	22.2	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	47.5 PK	74.0	-26.5	1.97 H	233	35.1	12.4
2	11140.00	36.0 AV	54.0	-18.0	1.97 H	233	23.6	12.4
3	#16710.00	45.1 PK	68.2	-23.1	3.07 H	214	29.5	15.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	50.4 PK	74.0	-23.6	1.51 V	259	38.0	12.4
2	11140.00	38.9 AV	54.0	-15.1	1.51 V	259	26.5	12.4
3	#16710.00	47.4 PK	68.2	-20.8	3.14 V	199	31.8	15.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Plot of Other Emission

Mode B


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

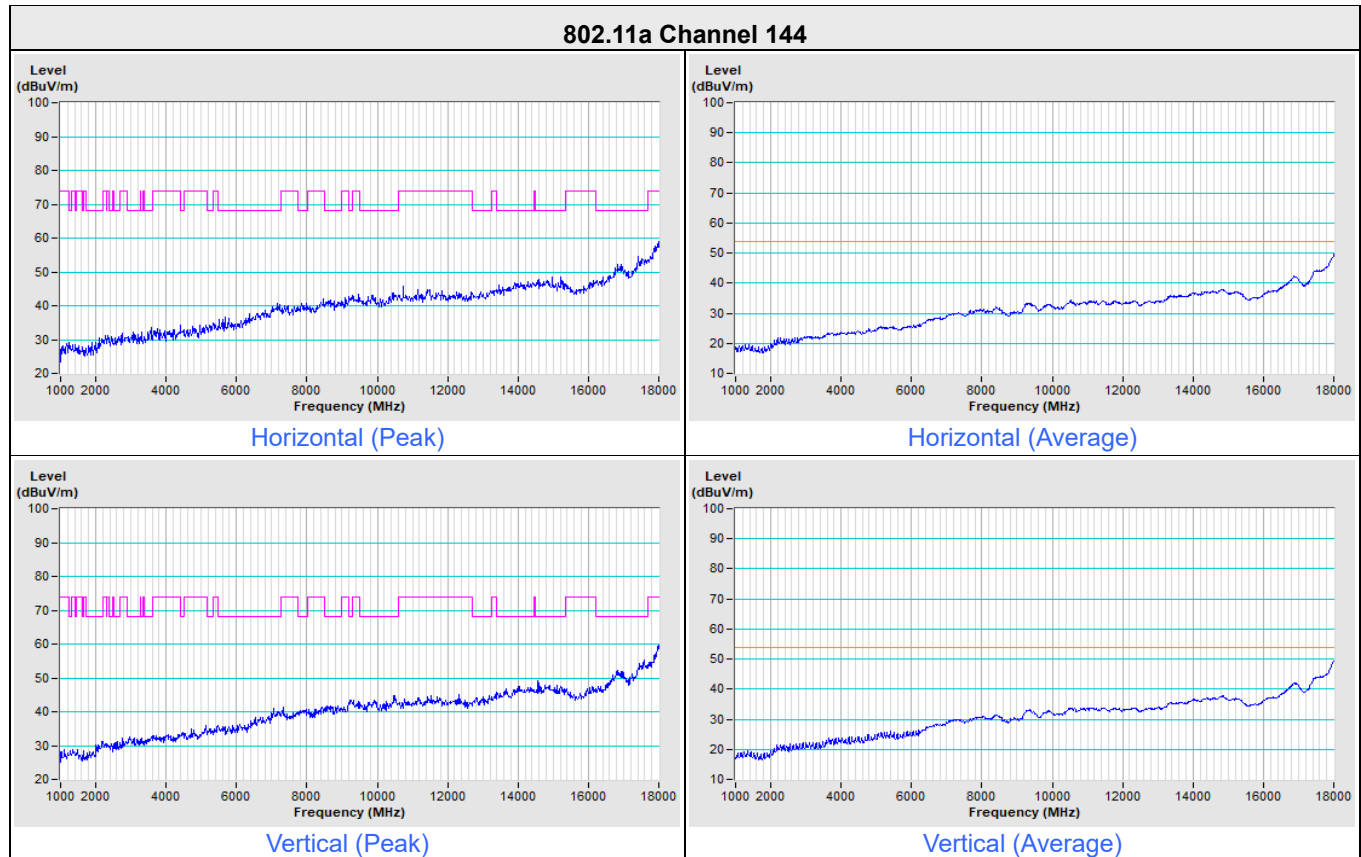

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

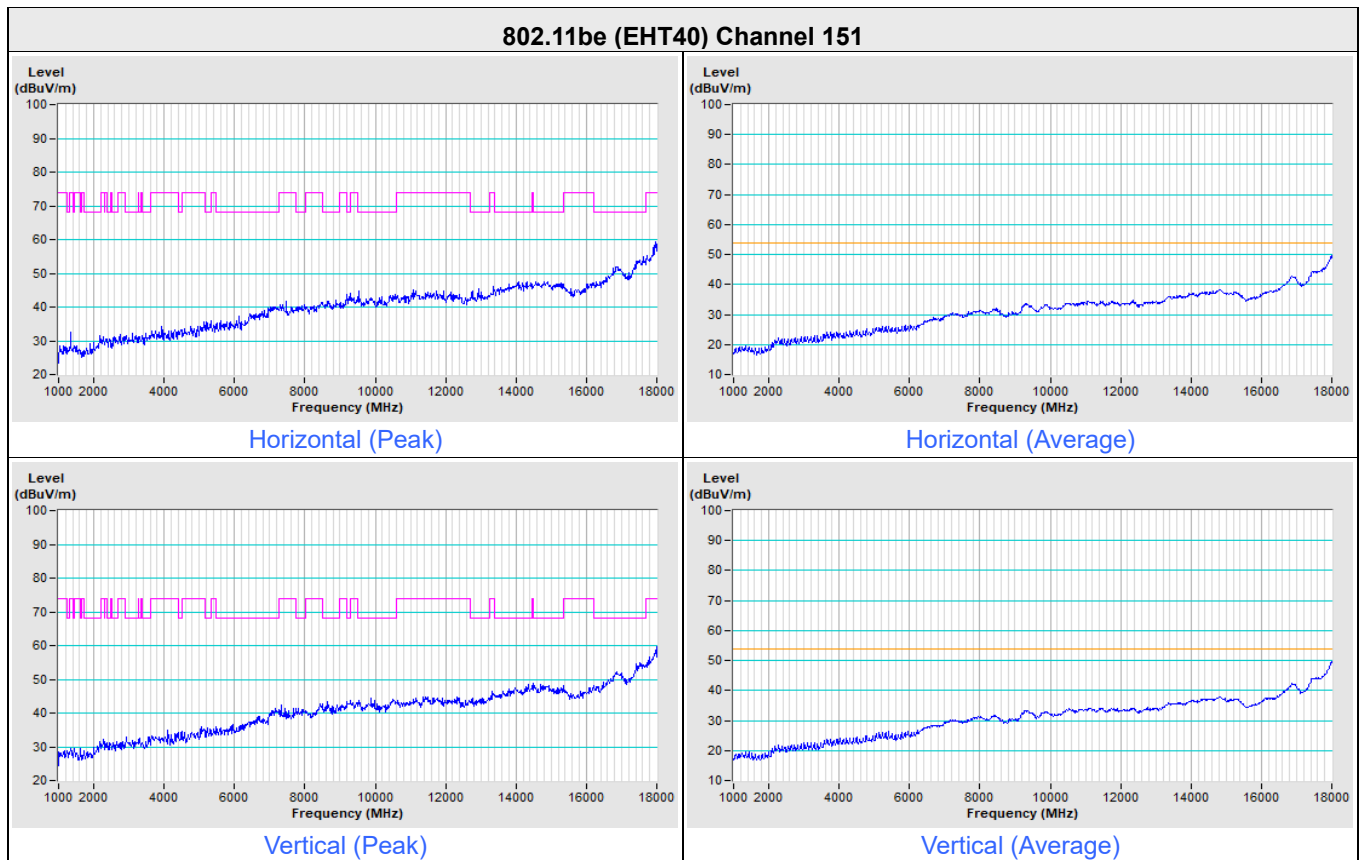

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

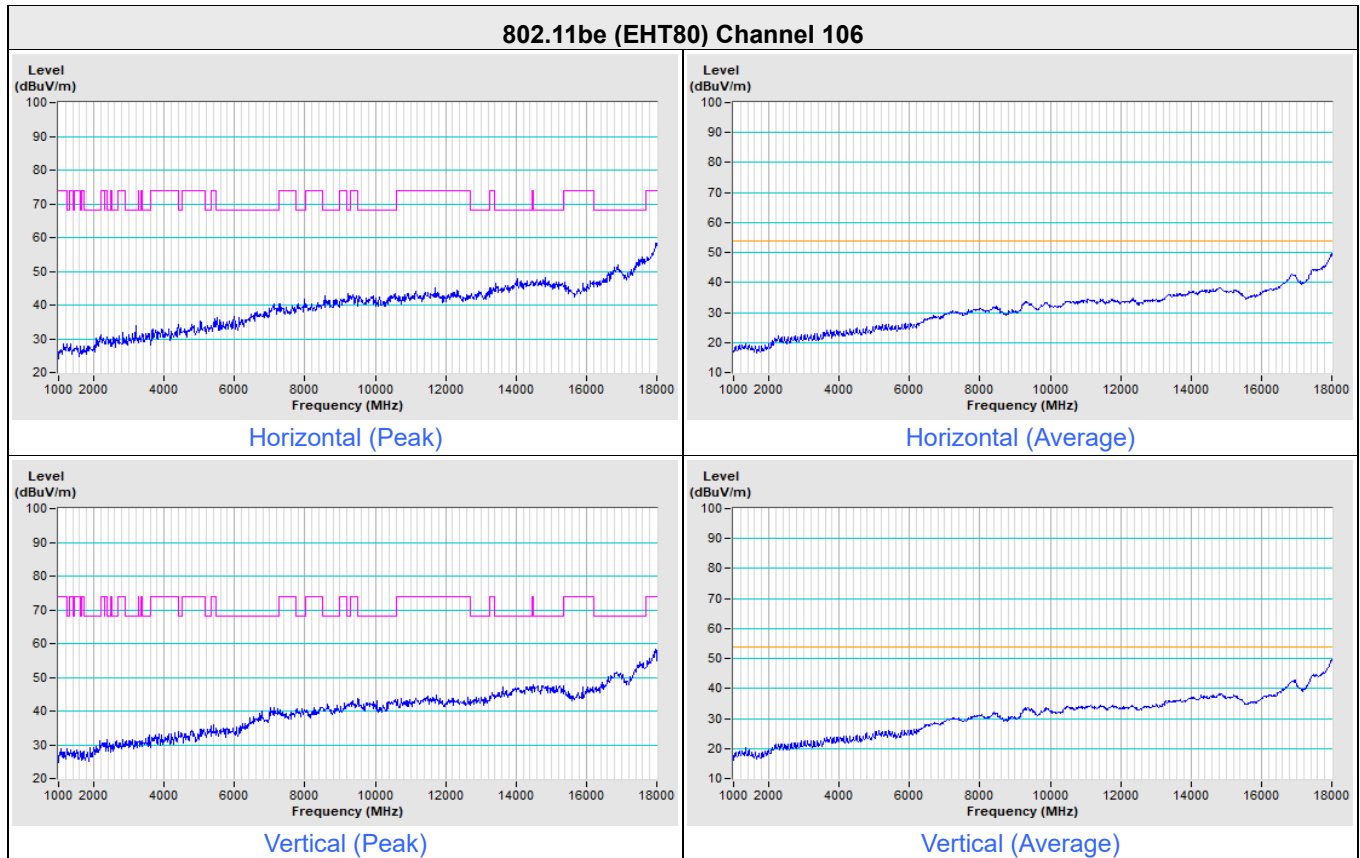

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

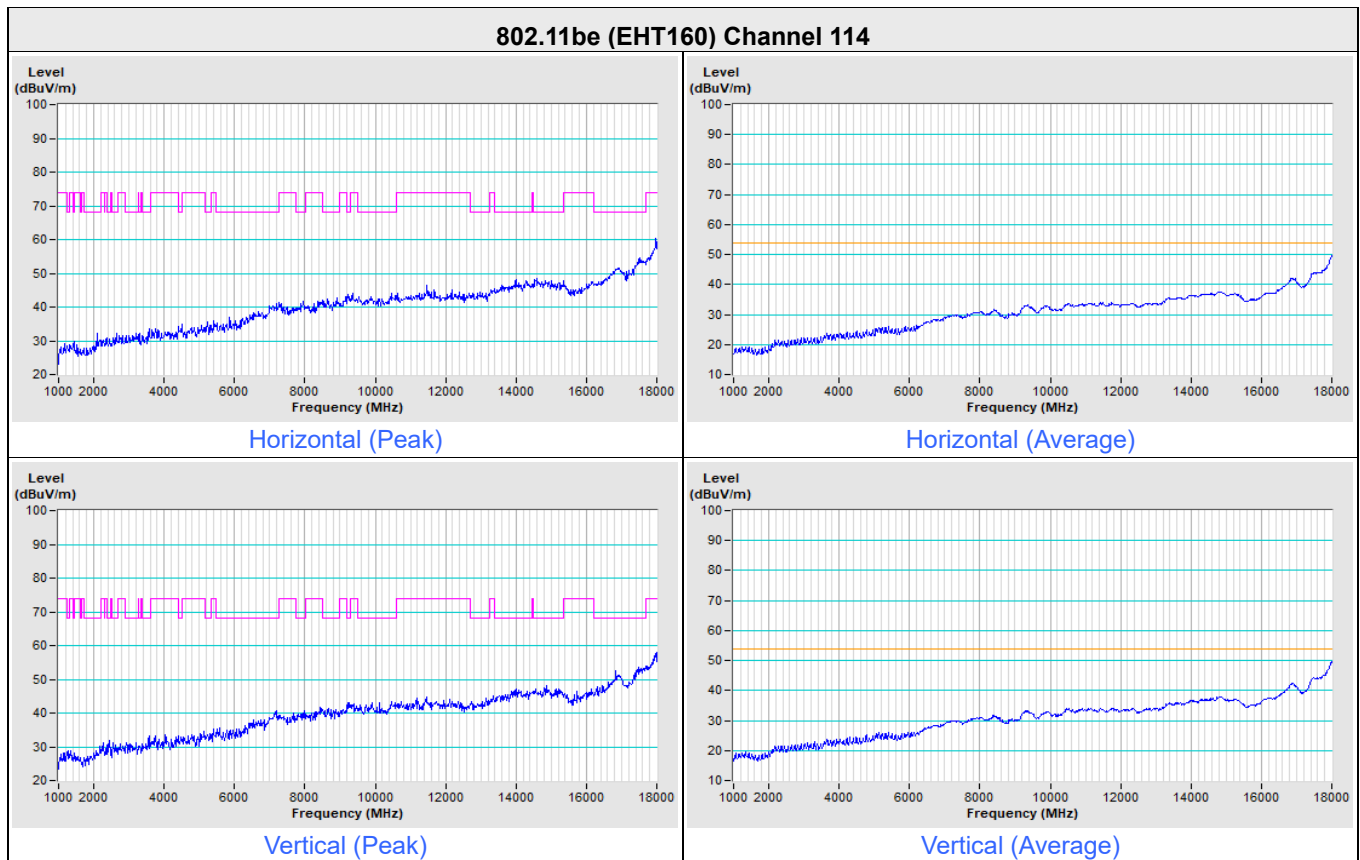

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

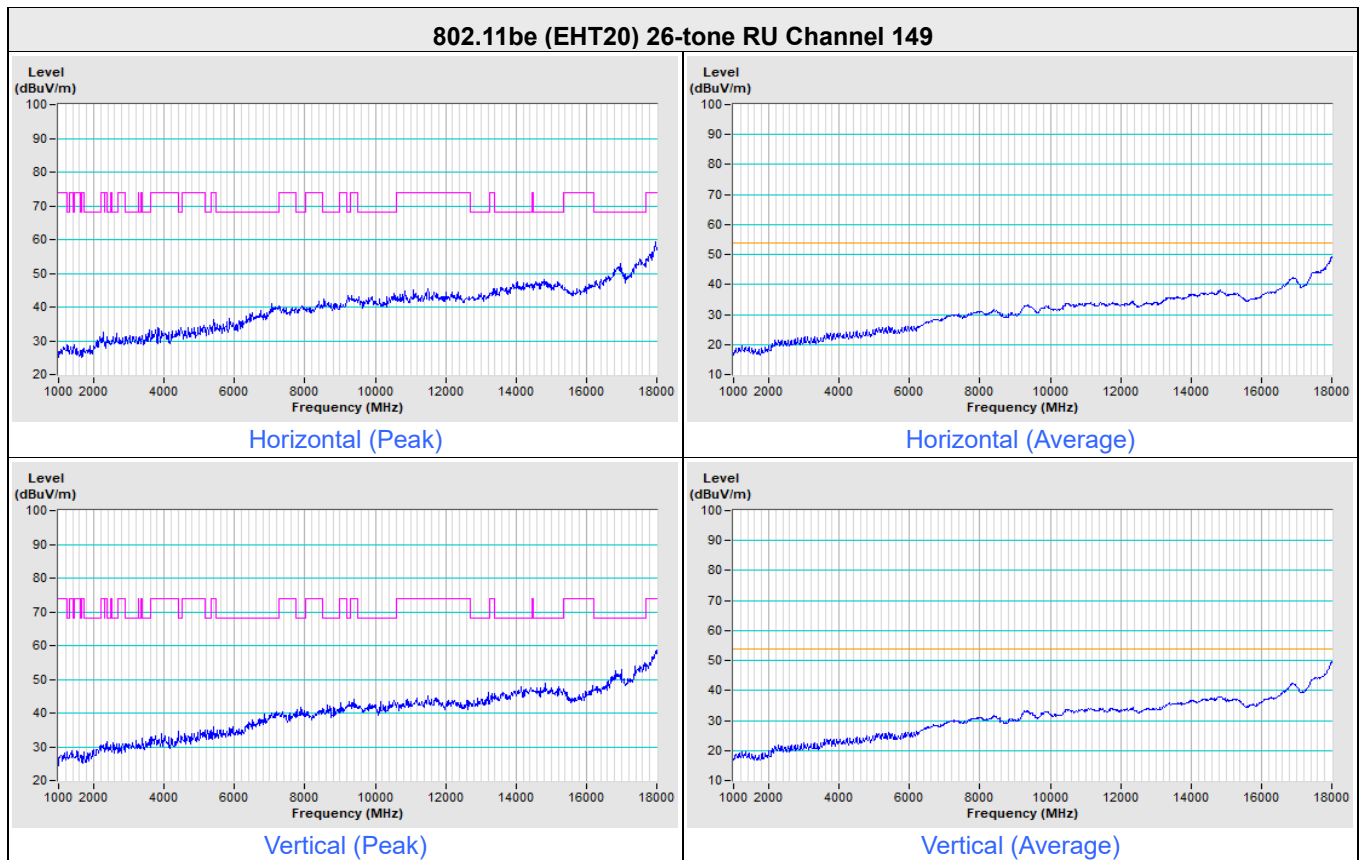

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---