


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5886.45	118.88 PK			11.23	13.76	7.93	23.62
2	#5643.24	59.82 PK	68.26	-8.44	-48.3	-45.06	7.93	-35.44
3	#5651.21	59.43 PK	69.16	-9.73	-47.12	-46.44	7.93	-35.83
4	#5700.51	59.45 PK	105.4	-45.95	-45.57	-48.38	7.93	-35.81
5	#5720.12	59.02 PK	111.12	-52.1	-46.2	-48.46	7.93	-36.24
6	#5896.28	93.79 PK	109.32	-15.53	-13.47	-11.57	7.93	-1.47
7	#5951.85	61.77 PK	88.26	-26.49	-42.83	-47.01	7.93	-33.49
8	*5885.71	109.87 AV			2.86	4.36	7.93	14.61
9	#5895.32	77.8 AV	90.02	-12.22	-29.3	-27.65	7.93	-17.46
10	#5932.67	52.89 AV	68.26	-15.37	-52.2	-54.81	7.93	-42.37

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

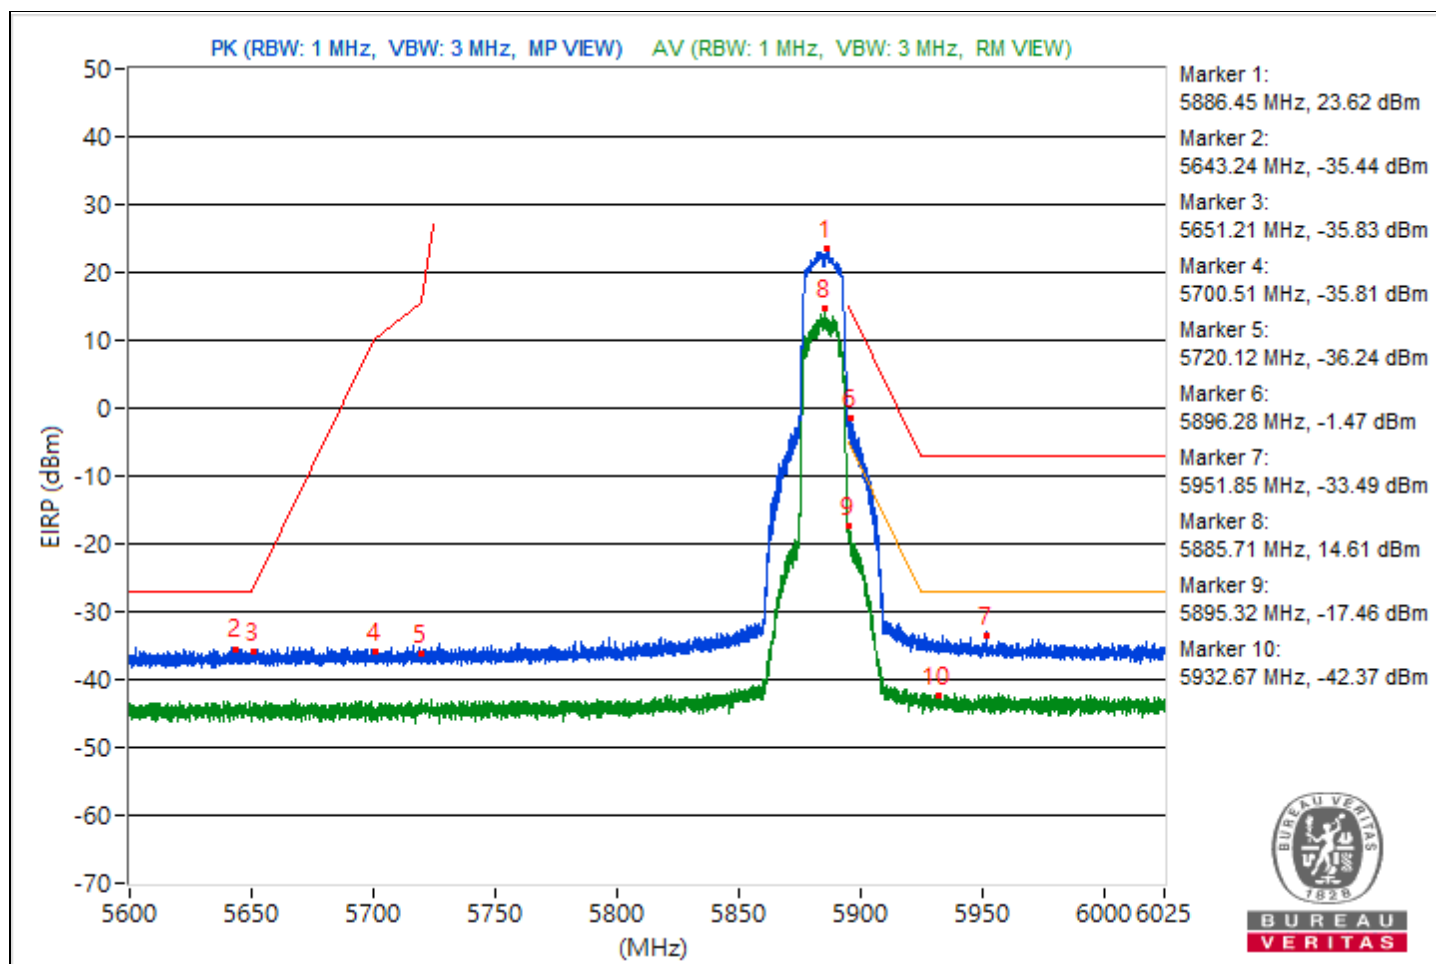


2S2T

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5844.43	119.14 PK			16.27	15.61	4.92	23.88
2	#5606.8	53.64 PK	68.26	-14.62	-48.44	-51.05	4.92	-41.62
3	#5651.58	53.4 PK	69.43	-16.03	-48.33	-52	4.92	-41.86
4	#5701.57	54.41 PK	105.7	-51.29	-49.77	-47.98	4.92	-40.85
5	#5720.27	54.2 PK	111.49	-57.29	-49.59	-48.47	4.92	-41.06
6	#5922.89	55.99 PK	89.8	-33.81	-48.45	-46.22	4.92	-39.27
7	#5938.78	55.78 PK	88.26	-32.48	-48.07	-46.84	4.92	-39.48
8	*5846.29	109.25 AV			2.64	7.96	4.92	13.99
9	#5924.22	49.67 AV	68.83	-19.16	-52.69	-54.54	4.92	-45.59
10	#5966.88	49.86 AV	68.26	-18.4	-52.66	-54.11	4.92	-45.4

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

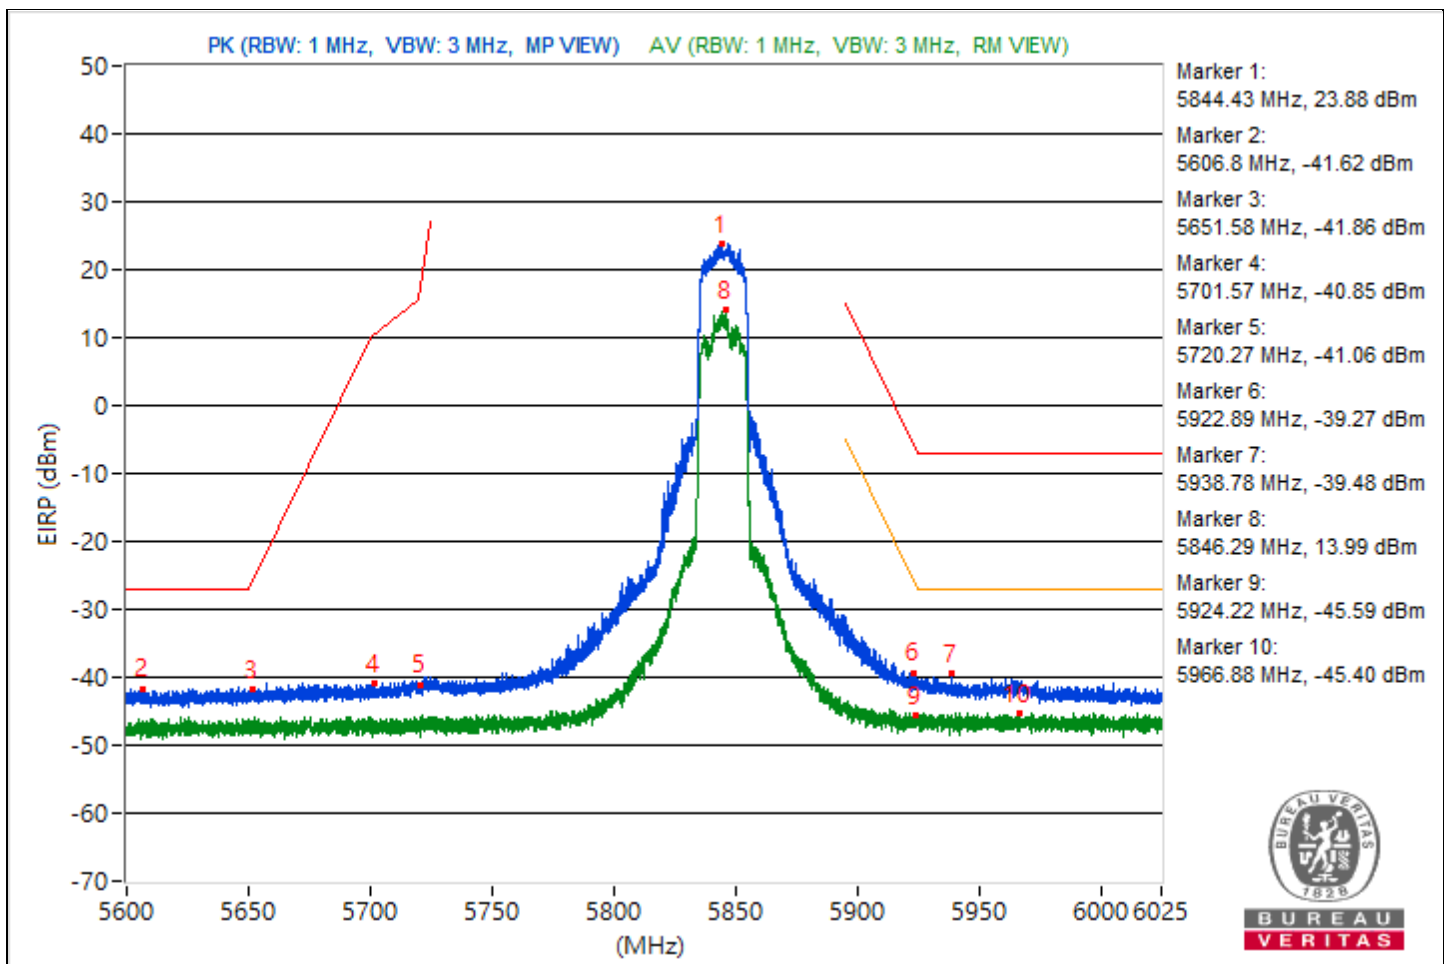


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5863.66	119.39 PK			16.49	15.9	4.92	24.13
2	#5646.17	57 PK	68.26	-11.26	-44.53	-48.92	4.92	-38.26
3	#5650.15	56.61 PK	68.37	-11.76	-46.1	-47.11	4.92	-38.65
4	#5701.31	56.79 PK	105.63	-48.84	-47.23	-45.7	4.92	-38.47
5	#5720.12	56.33 PK	111.12	-54.79	-46.95	-46.77	4.92	-38.93
6	#5923.74	61.78 PK	89.18	-27.4	-41.64	-41.19	4.92	-33.48
7	#5928.74	60.07 PK	88.26	-28.19	-45.64	-41.53	4.92	-35.19
8	*5864.08	108.28 AV			3.09	6.45	4.92	13.02
9	#5924.43	50.57 AV	68.67	-18.1	-53.02	-52.25	4.92	-44.69
10	#5926.77	50.68 AV	68.26	-17.58	-54.48	-51.16	4.92	-44.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

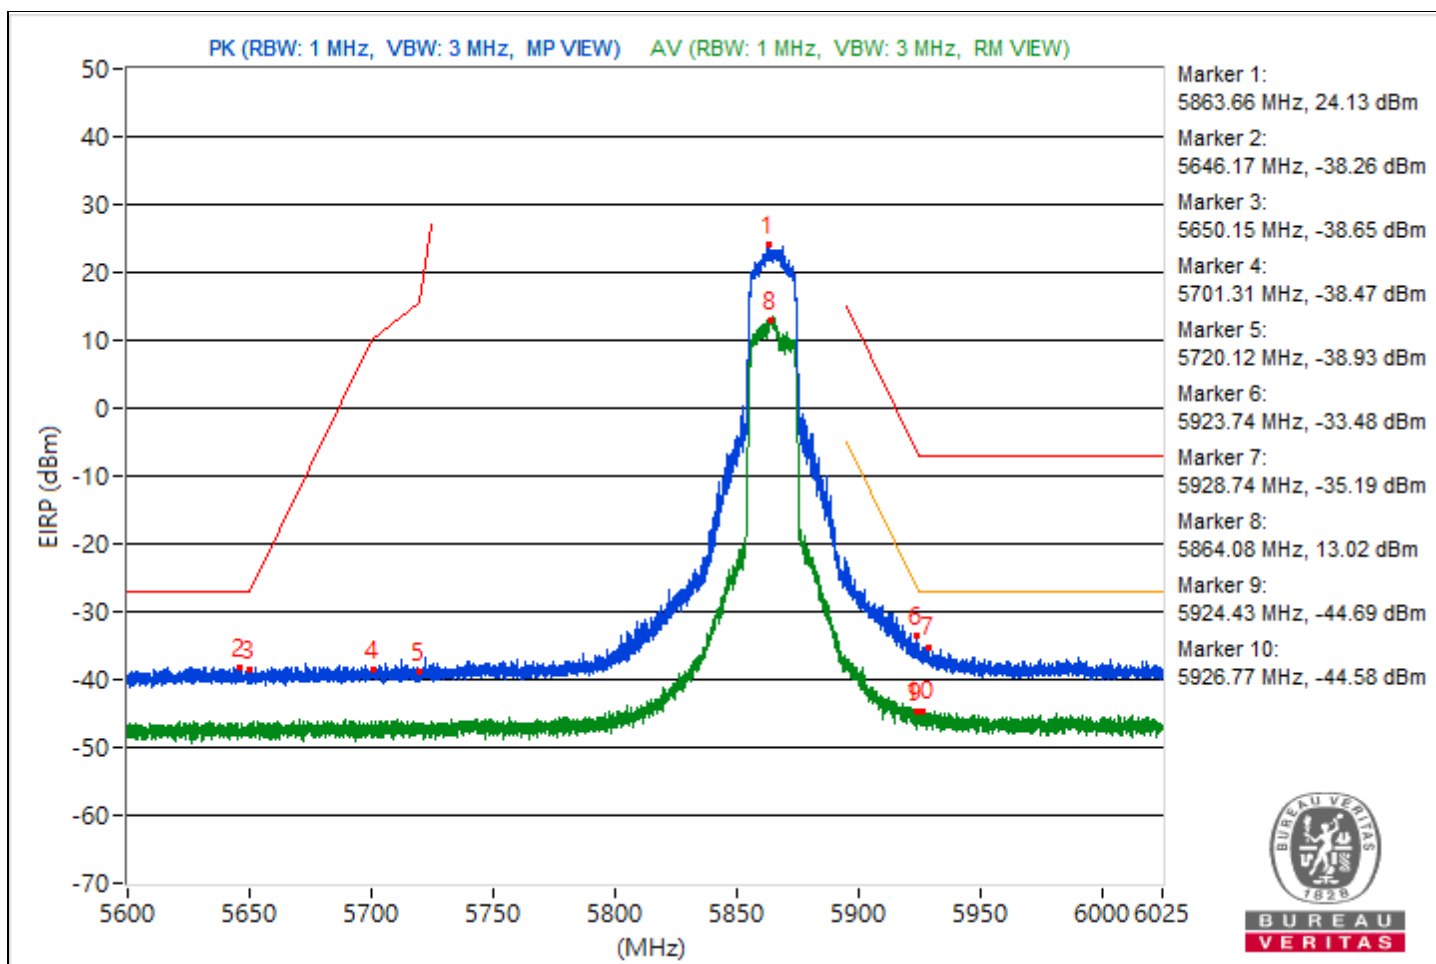


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	22°C, 63% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5887.09	119.6 PK			17.46	15.03	4.92	24.34
2	#5629.54	53.69 PK	68.26	-14.57	-47.83	-52.25	4.92	-41.57
3	#5651.32	53.26 PK	69.24	-15.98	-48.34	-52.46	4.92	-42
4	#5704.12	53.5 PK	106.42	-52.92	-50.49	-49.01	4.92	-41.76
5	#5720.06	52.4 PK	111	-58.6	-49.77	-52.13	4.92	-42.86
6	#5895	106.23 PK	110.26	-4.03	3.07	3.01	4.92	10.97
7	#5925.23	78.4 PK	88.26	-9.86	-21.8	-45.52	4.92	-16.86
8	*5882.78	108.72 AV			6.1	4.86	4.92	13.46
9	!#5895	80.57 AV	90.26	-9.69	-23.31	-22.03	4.92	-14.69
10	#5925.18	61.26 AV	68.26	-7	-39.06	-53.71	4.92	-34


Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C)

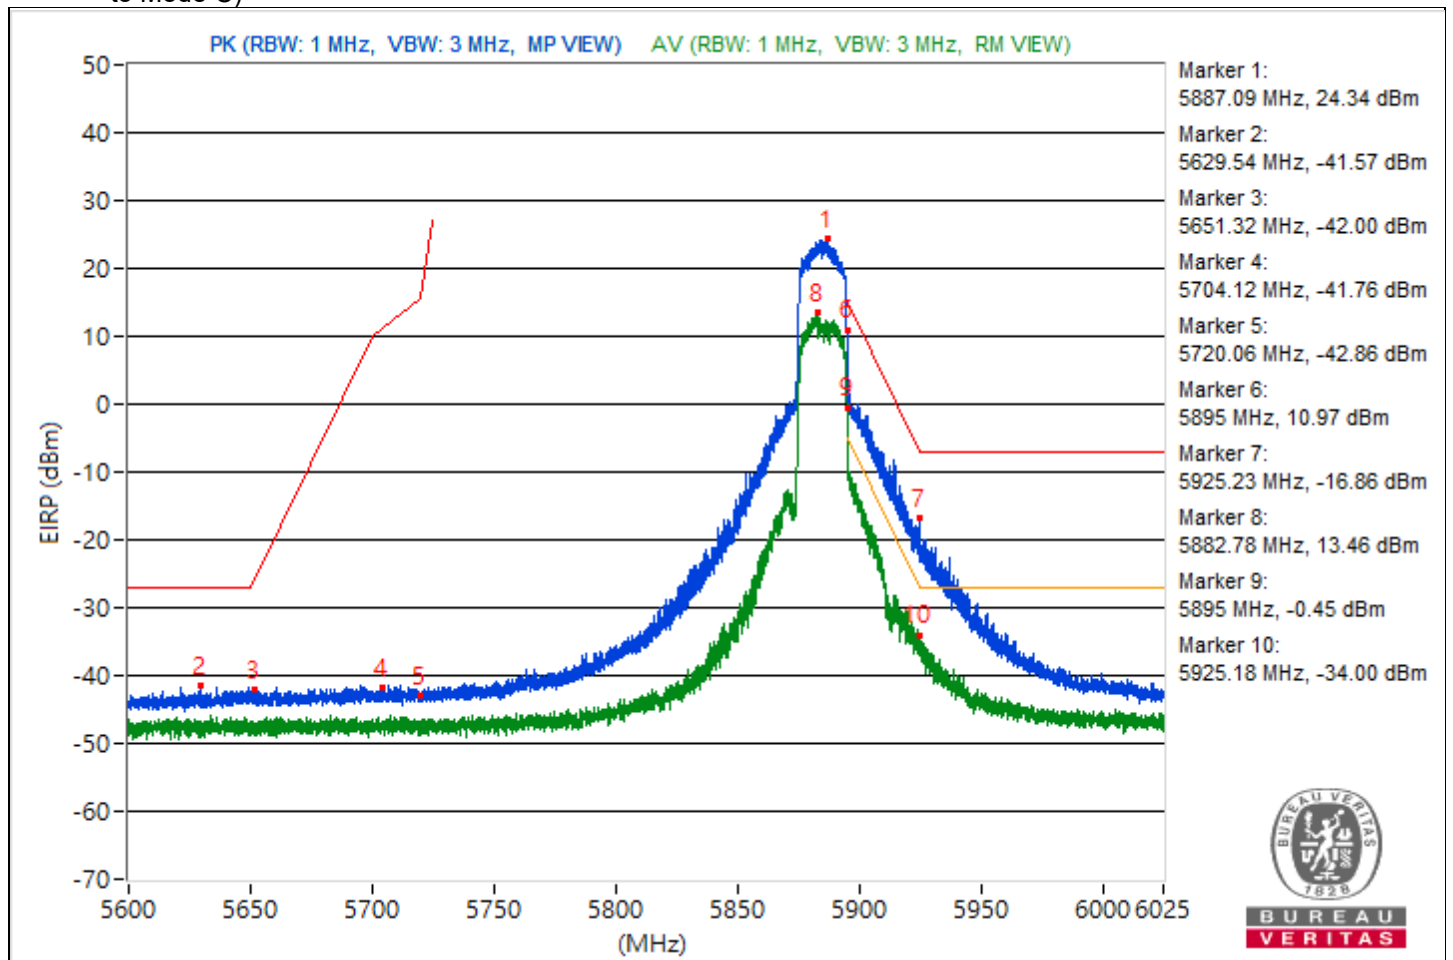


AV Integration method

Chain 0

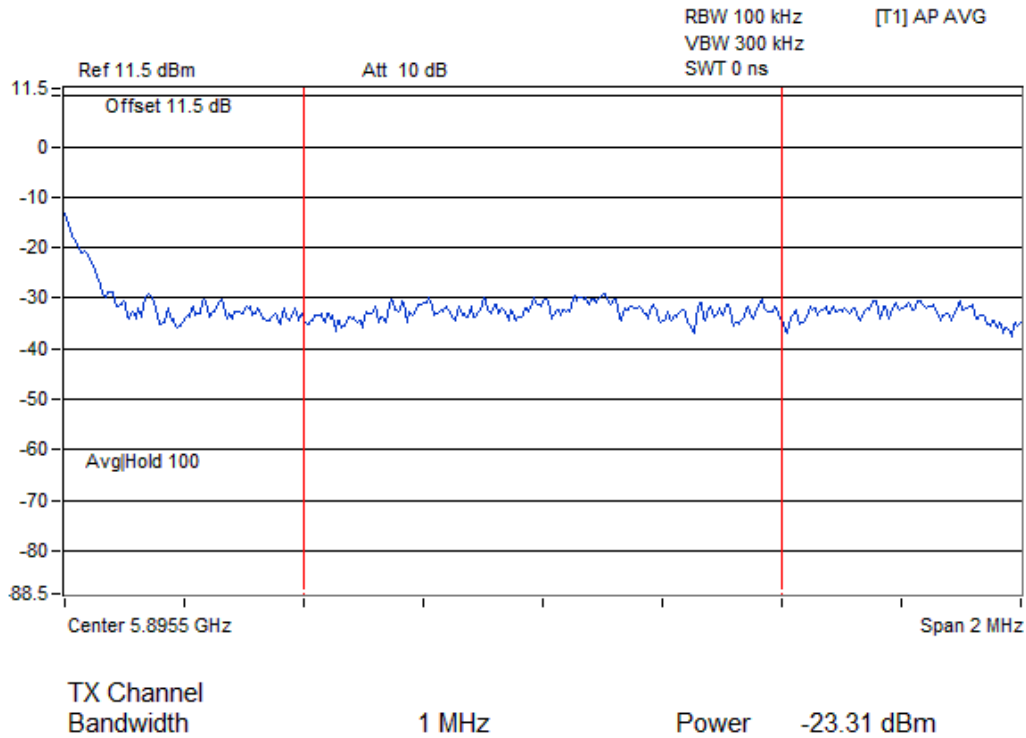

Chain 1

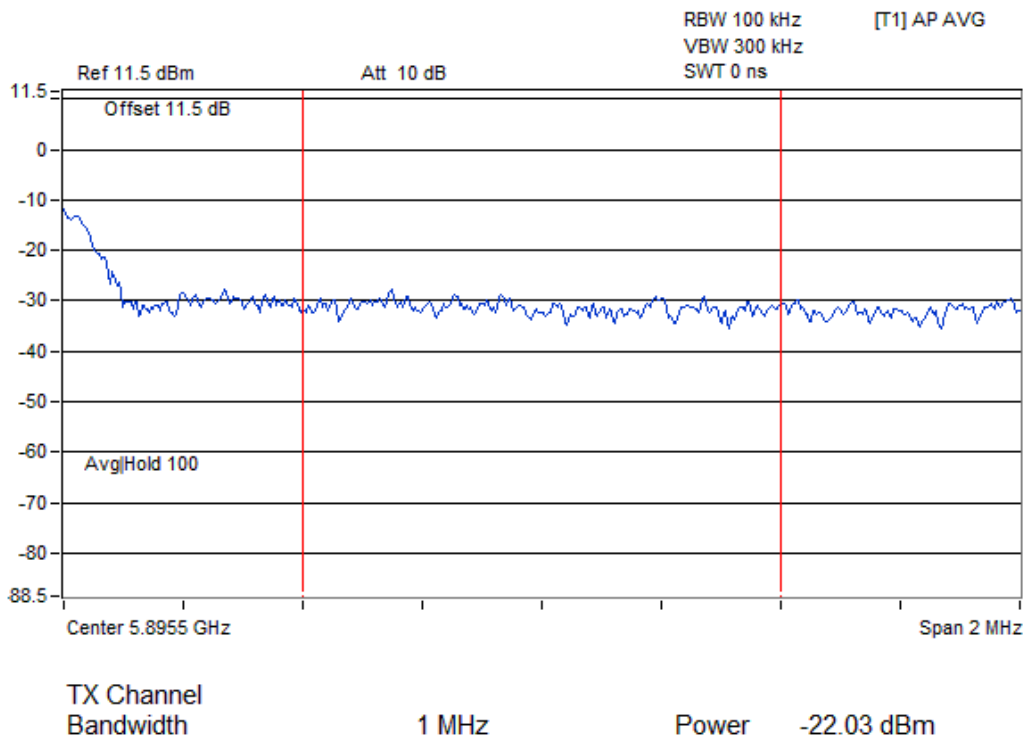


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	22°C, 63% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5833.43	120.58 PK			18.3	16.24	4.92	25.32
2	#5637.93	56.98 PK	68.26	-11.28	-48.94	-44.55	4.92	-38.28
3	#5650.26	56.23 PK	68.45	-12.22	-49.09	-45.54	4.92	-39.03
4	#5706.36	63.62 PK	107.04	-43.42	-44.9	-37.25	4.92	-31.64
5	#5720.22	62.15 PK	111.37	-49.22	-39.97	-42.45	4.92	-33.11
6	#5923.58	66.99 PK	89.3	-22.31	-39.49	-34.36	4.92	-28.27
7	#5925.71	67.82 PK	88.26	-20.44	-38.42	-33.6	4.92	-27.44
8	*5832.53	108.86 AV			3.84	6.95	4.92	13.6
9	#5924.17	55.02 AV	68.87	-13.85	-47.6	-48.83	4.92	-40.24
10	#5925.87	55.13 AV	68.26	-13.13	-48.22	-47.9	4.92	-40.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

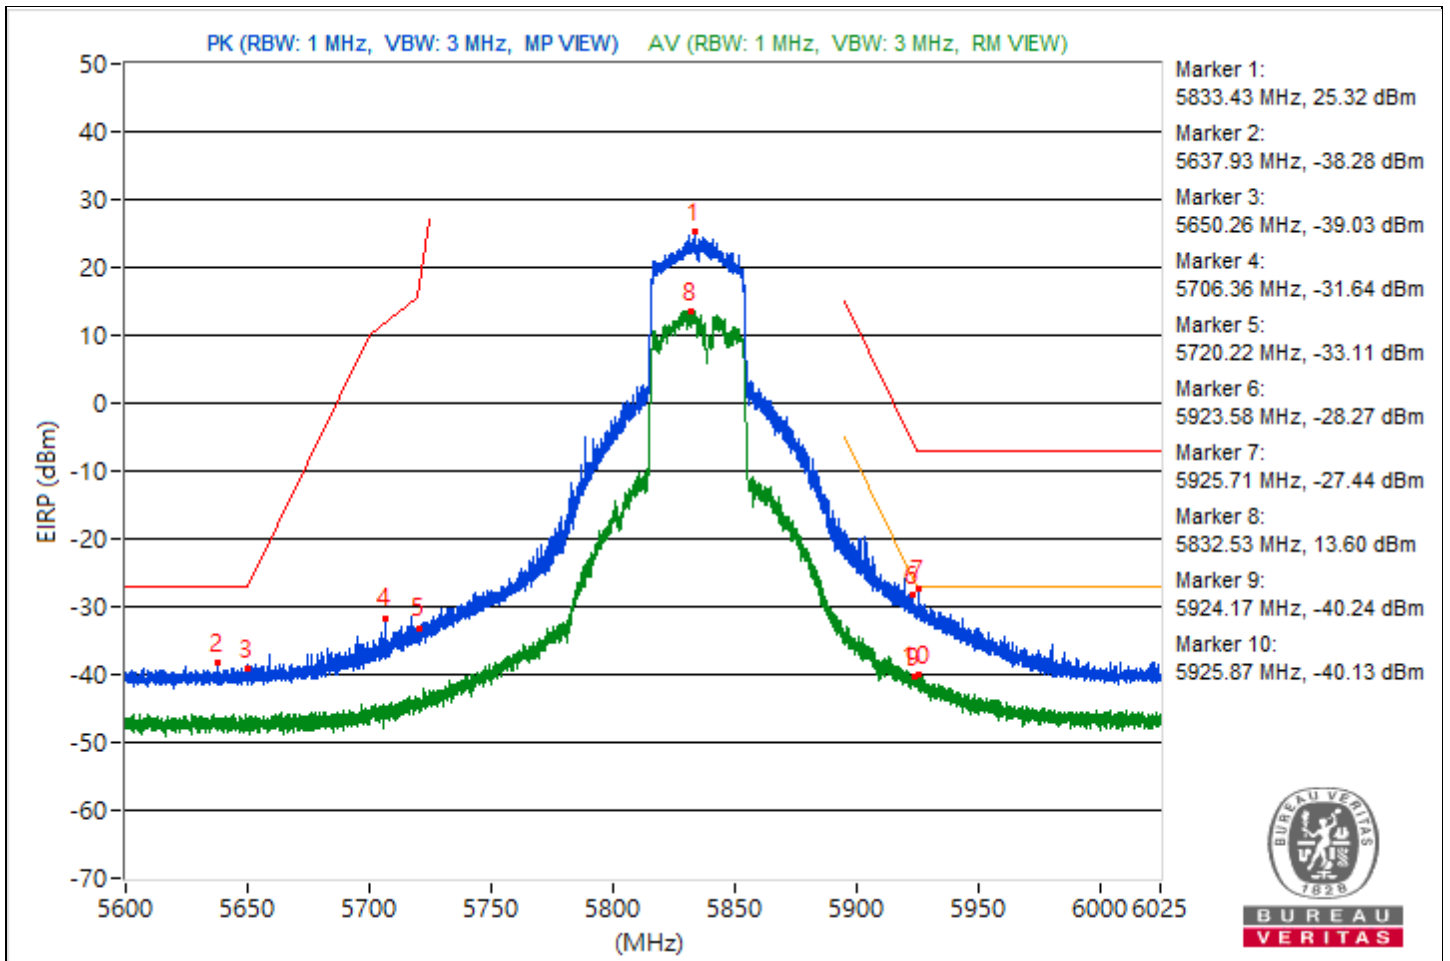


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 64% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5871.68	120.54 PK			15.52	18.63	4.92	25.28
2	#5637.82	54.35 PK	68.26	-13.91	-47.61	-50.56	4.92	-40.91
3	#5650.1	52.82 PK	68.33	-15.51	-50.4	-50.35	4.92	-42.44
4	#5700.88	55.98 PK	105.51	-49.53	-47.79	-46.69	4.92	-39.28
5	#5720.49	57.64 PK	111.97	-54.33	-48.91	-43.68	4.92	-37.62
6	#5912.8	88.72 PK	97.21	-8.49	-13.61	-15.53	4.92	-6.54
7	#5925.18	78.76 PK	88.26	-9.5	-23.75	-25.24	4.92	-16.5
8	*5876.04	109.56 AV			5.06	7.38	4.92	14.3
9	#5911.37	76.83 AV	78.26	-1.43	-27.99	-25.17	4.92	-18.43
10	#5925.39	65.9 AV	68.26	-2.36	-38.34	-36.44	4.92	-29.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

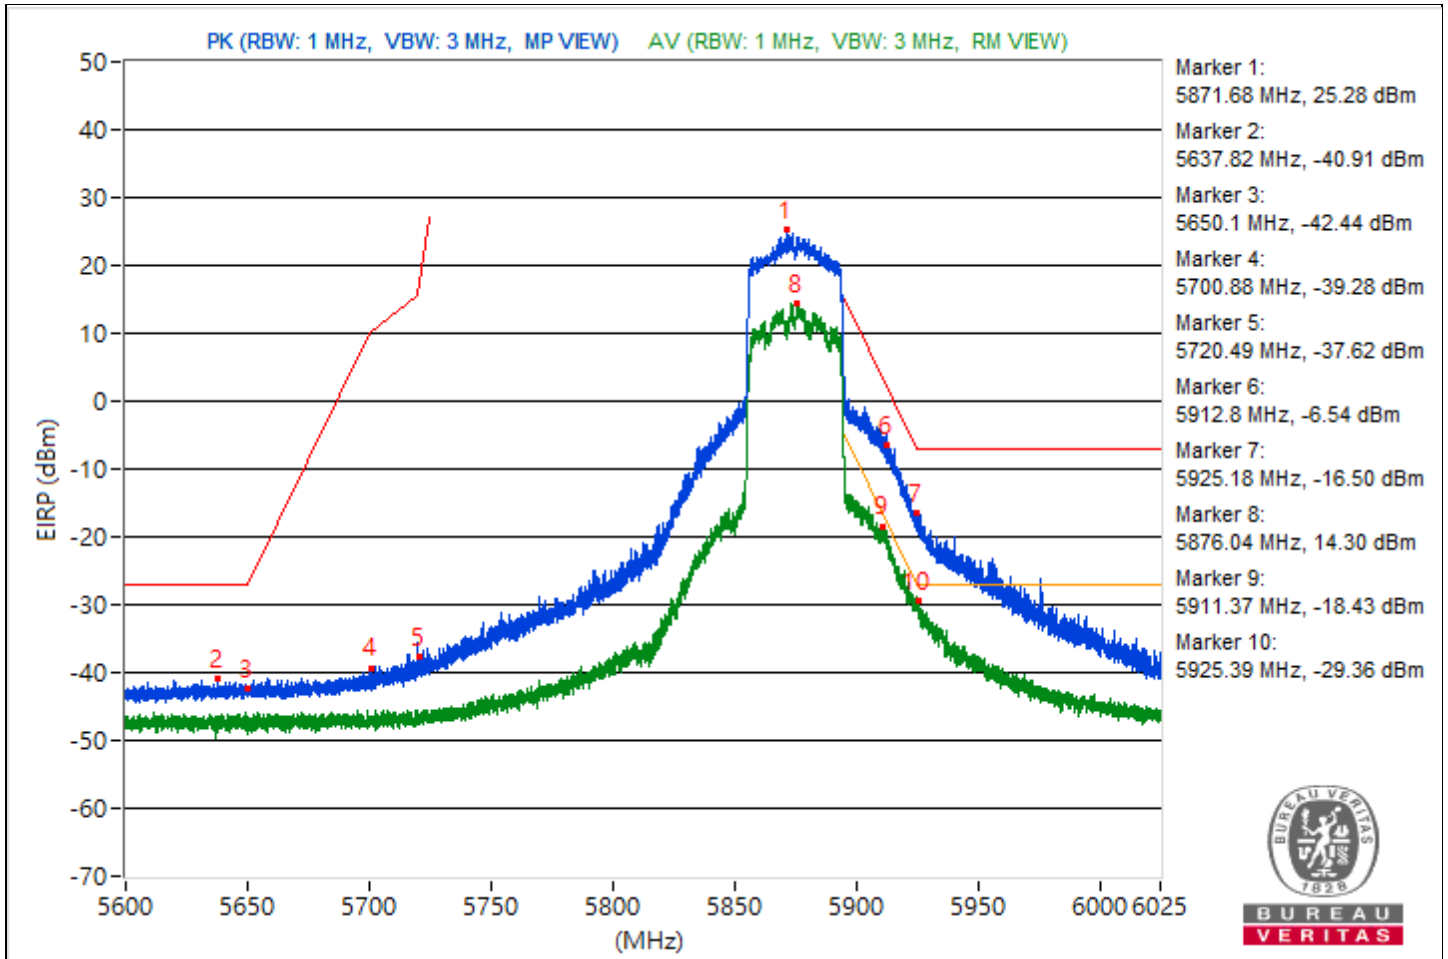


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 64% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5861.11	115.23 PK			9.23	13.73	4.92	19.97
2	#5643.3	60.56 PK	68.26	-7.7	-40.83	-45.75	4.92	-34.7
3	#5650.52	60.65 PK	68.65	-8	-41.5	-43.93	4.92	-34.61
4	#5702.8	68.28 PK	106.04	-37.76	-32.8	-39.18	4.92	-26.98
5	#5720.7	66.01 PK	112.46	-46.45	-36.43	-38.09	4.92	-29.25
6	#5923.64	81.83 PK	89.26	-7.43	-20.1	-23.14	4.92	-13.43
7	#5932.51	81.28 PK	88.26	-6.98	-20.22	-24.71	4.92	-13.98
8	*5846.71	104.19 AV			2.38	-1.02	4.92	8.93
9	#5924.59	67.76 AV	68.56	-0.8	-35.67	-35.2	4.92	-27.5
10	#5927.73	67.39 AV	68.26	-0.87	-38.15	-34.29	4.92	-27.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

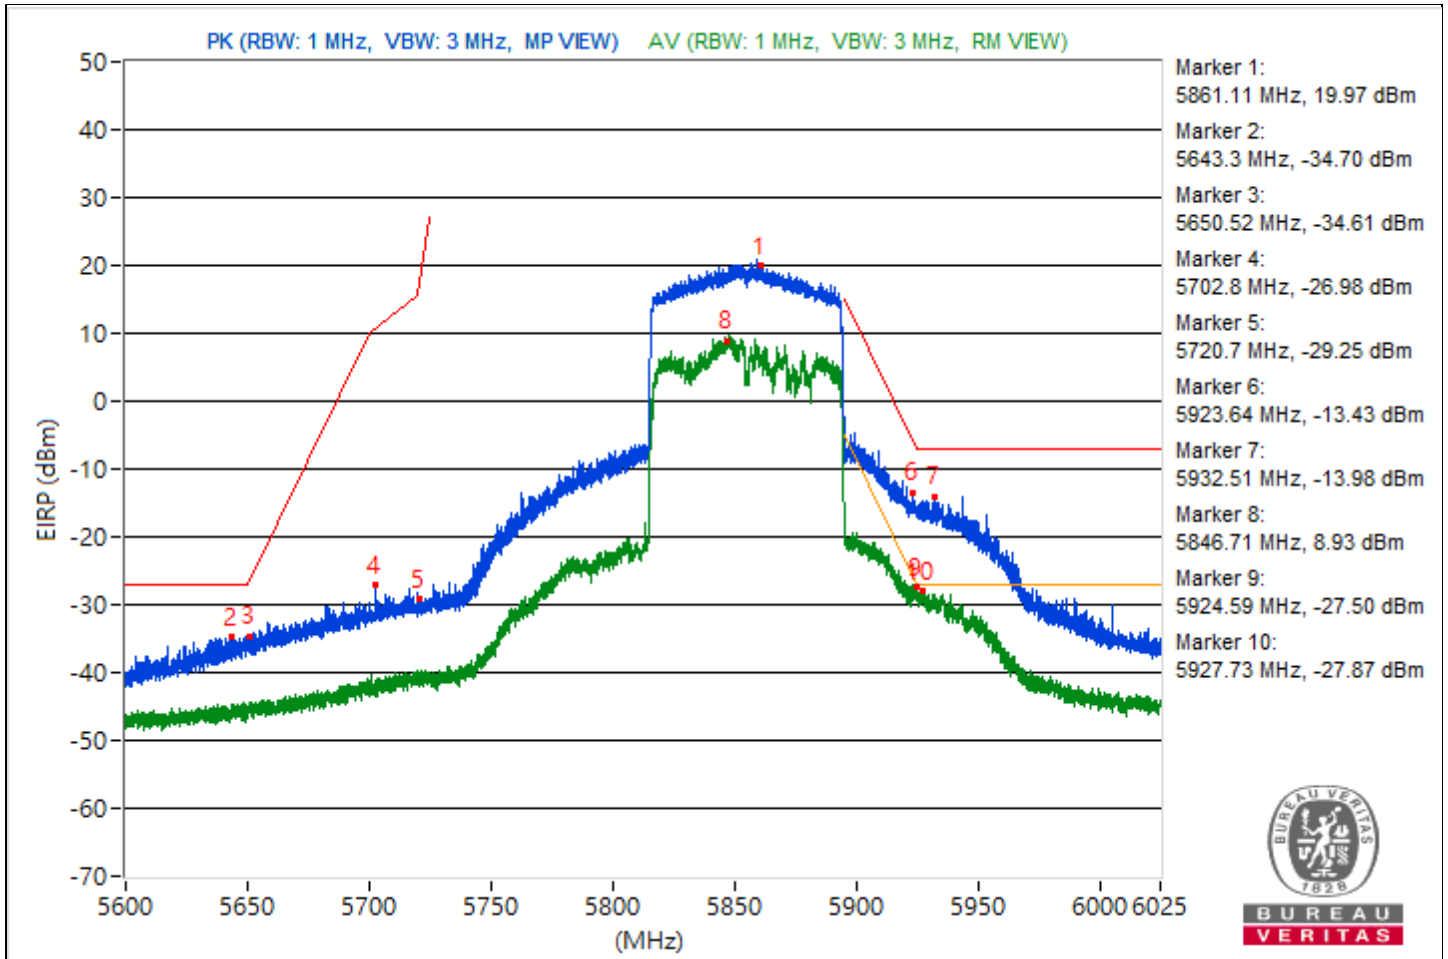


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	22°C, 63% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5811.54	110.41 PK			8.03	6.22	4.92	15.15
2	#5649.78	67.19 PK	68.26	-1.07	-36.95	-35.22	4.92	-28.07
3	#5650.31	66.13 PK	68.49	-2.36	-38.74	-35.86	4.92	-29.13
4	#5700.57	69.36 PK	105.42	-36.06	-34.84	-33.02	4.92	-25.9
5	#5720.33	68.05 PK	111.61	-43.56	-35.77	-34.59	4.92	-27.21
6	#5916.84	72.6 PK	94.25	-21.65	-32.67	-29.19	4.92	-22.66
7	#5935.17	68.37 PK	88.26	-19.89	-38.53	-32.85	4.92	-26.89
8	*5811.92	99.16 AV			-5.53	-2.91	4.92	3.9
9	#5924.75	56.16 AV	68.44	-12.28	-49.9	-45.32	4.92	-39.1
10	#5925.23	55.78 AV	68.26	-12.48	-46.87	-48.04	4.92	-39.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

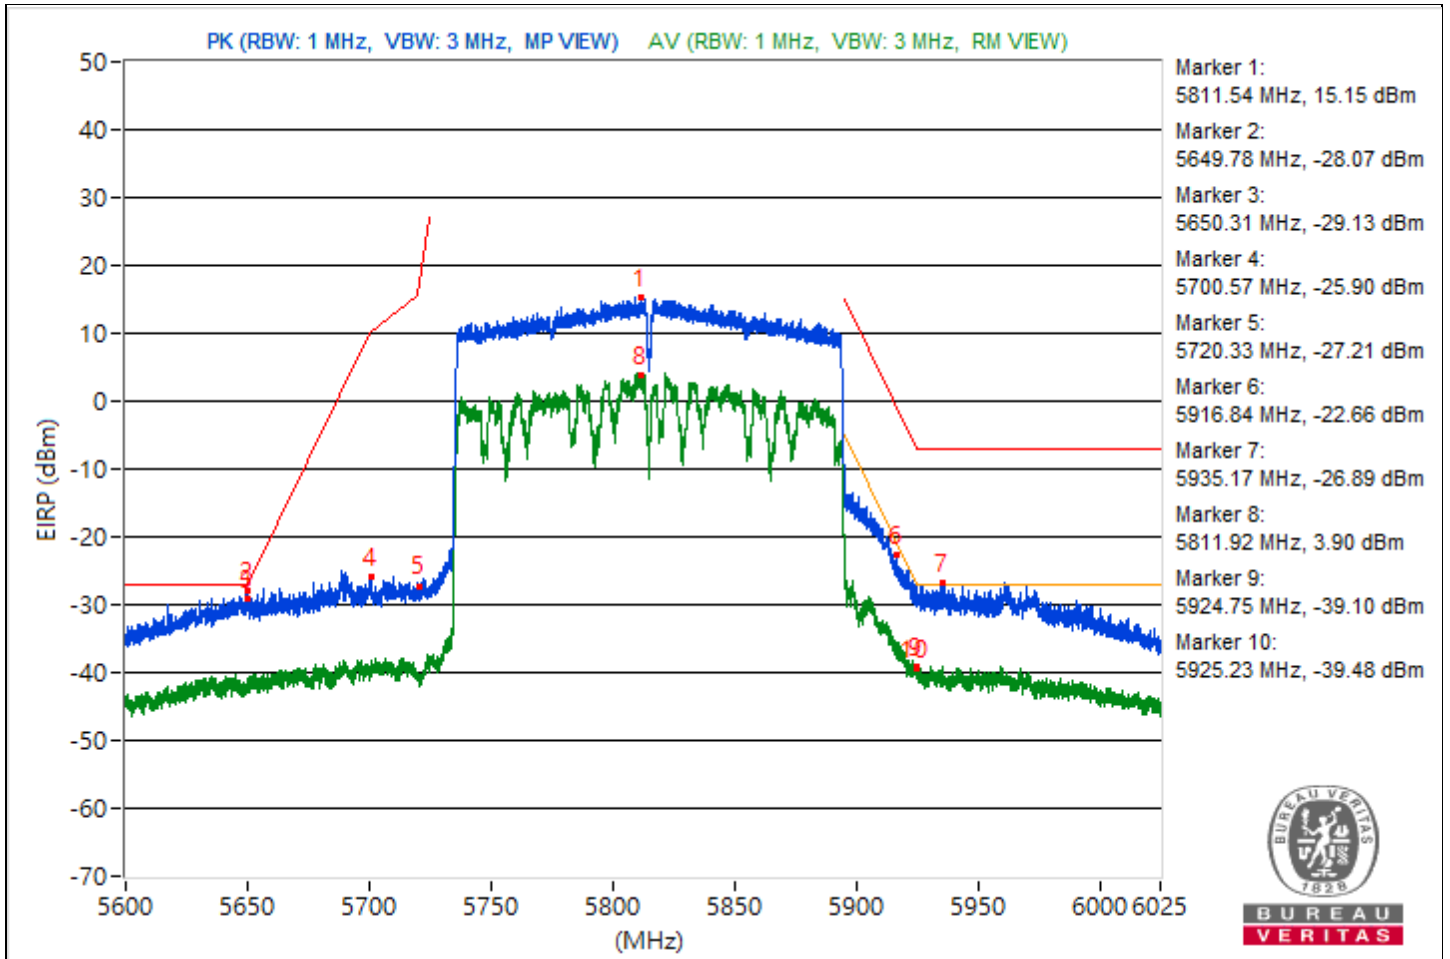


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.94	119.66 PK			17.12	15.71	4.92	24.4
2	#5613.76	52.31 PK	68.26	-15.95	-49.73	-52.46	4.92	-42.95
3	#5650.52	51.35 PK	68.65	-17.3	-50.95	-52.96	4.92	-43.91
4	#5699.98	52.75 PK	105.25	-52.5	-50.37	-50.5	4.92	-42.51
5	#5720.27	51.38 PK	111.49	-60.11	-52.14	-51.5	4.92	-43.88
6	#5923.96	52.5 PK	89.03	-36.53	-51.33	-50.13	4.92	-42.76
7	#5931.82	53.09 PK	88.26	-35.17	-48.85	-51.86	4.92	-42.17
8	*5836.78	107.86 AV			3.53	5.57	4.92	12.6
9	#5923.96	49.55 AV	69.03	-19.48	-53.91	-53.39	4.92	-45.71
10	#5941.43	49.92 AV	68.26	-18.34	-52.24	-54.64	4.92	-45.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

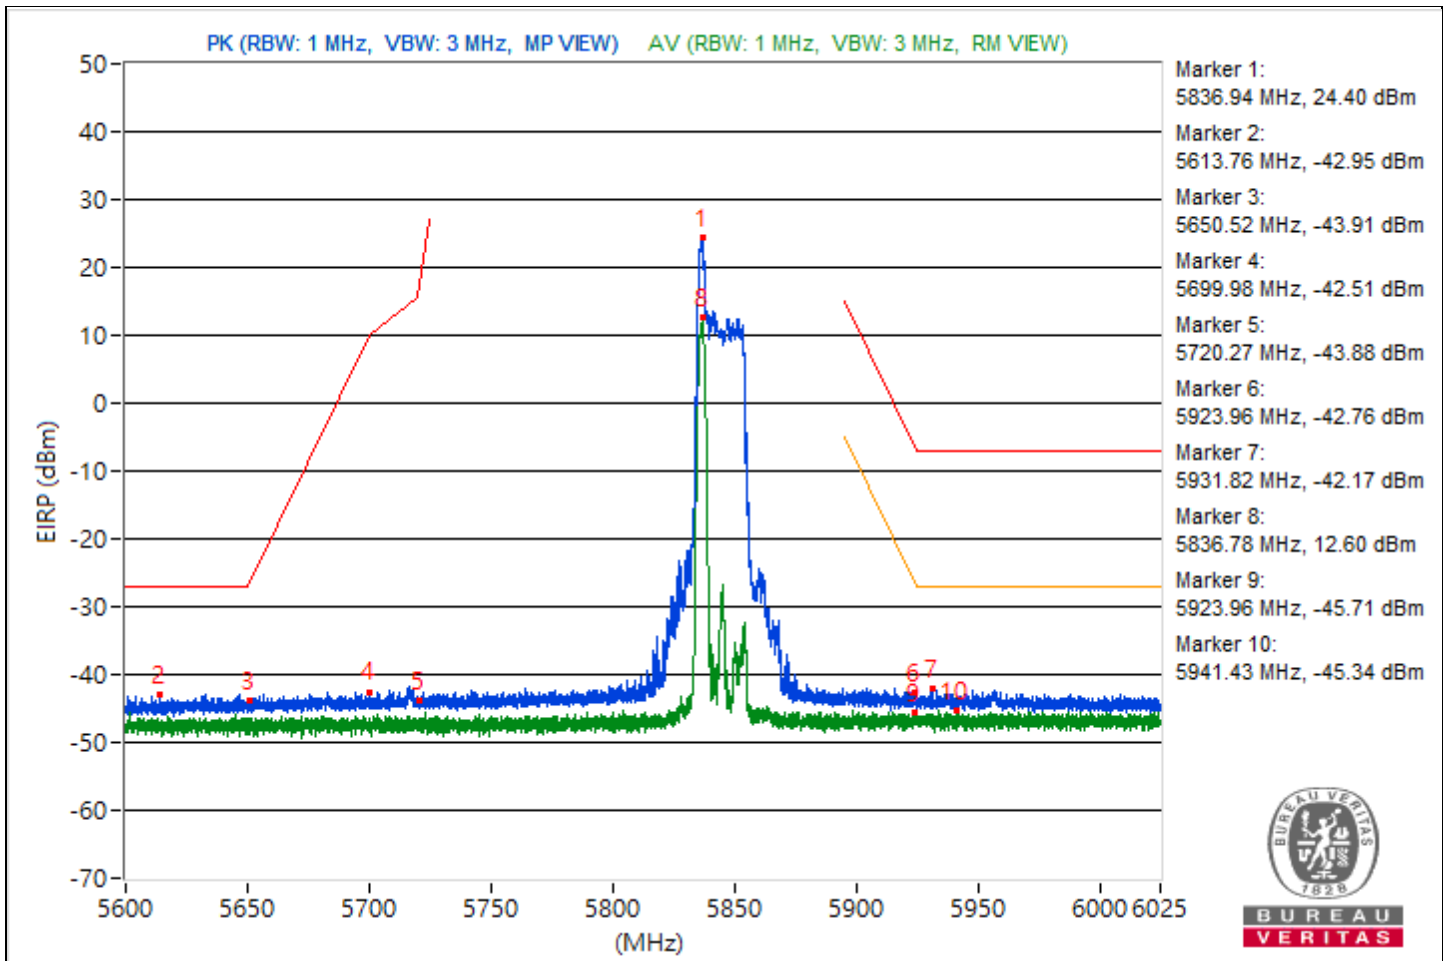


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5856.33	119.56 PK			17.34	15.11	4.92	24.3
2	#5648.08	56.73 PK	68.26	-11.53	-47.66	-45.53	4.92	-38.53
3	#5650.47	55.8 PK	68.61	-12.81	-46.9	-47.95	4.92	-39.46
4	#5701.04	55.77 PK	105.55	-49.78	-46.69	-48.29	4.92	-39.49
5	#5720.06	55.56 PK	111	-55.44	-47.95	-47.33	4.92	-39.7
6	#5924.86	56.79 PK	88.36	-31.57	-46.07	-46.76	4.92	-38.47
7	#5994.13	57.67 PK	88.26	-30.59	-47.14	-44.35	4.92	-37.59
8	*5856.33	108.84 AV			3.03	7.27	4.92	13.58
9	#5923.37	49.07 AV	69.45	-20.38	-55.7	-52.96	4.92	-46.19
10	#5976.12	50.13 AV	68.26	-18.13	-54.23	-52.13	4.92	-45.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

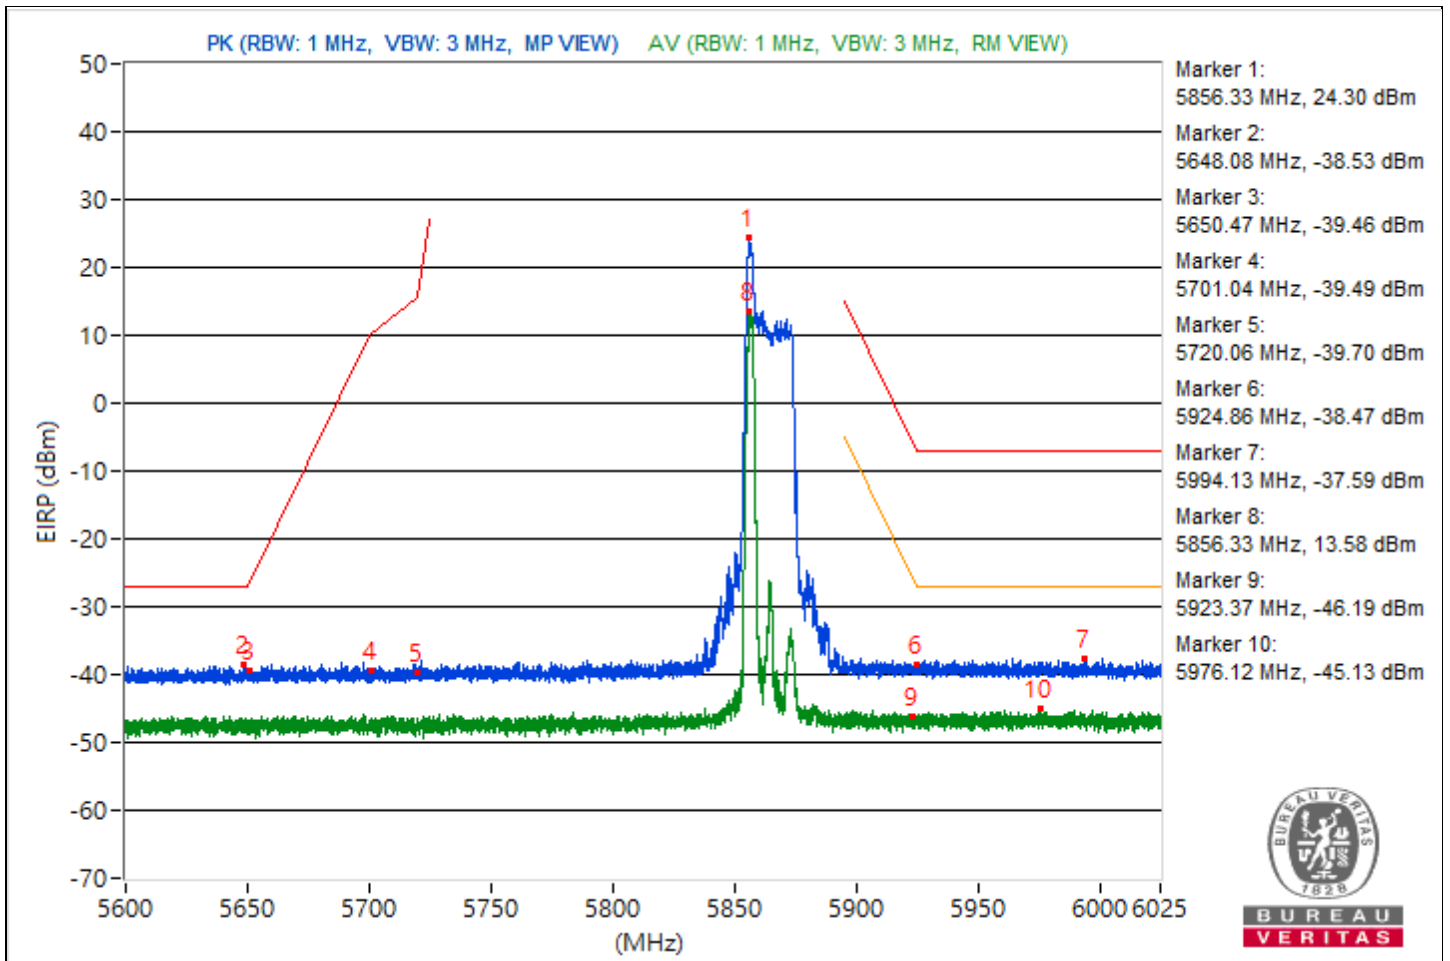


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5893.89	118.58 PK			15.72	15.04	4.92	23.32
2	#5649.88	52.29 PK	68.26	-15.97	-53.88	-49.15	4.92	-42.97
3	#5650.47	51.27 PK	68.61	-17.34	-51.46	-52.42	4.92	-43.99
4	#5701.2	52.01 PK	105.6	-53.59	-49.72	-53.4	4.92	-43.25
5	#5720.81	51.79 PK	112.7	-60.91	-51.93	-50.93	4.92	-43.47
6	#5895	108.9 PK	110.26	-1.36	5.93	5.48	4.92	13.64
7	#5927.41	52.95 PK	88.26	-35.31	-51.66	-49.18	4.92	-42.31
8	*5892.88	106.91 AV			-0.53	5.82	4.92	11.65
9	!#5895	68.27 AV	90.26	-21.99	-36.52	-33.75	4.92	-26.99
10	#5938.35	49.98 AV	68.26	-18.28	-52.44	-54.15	4.92	-45.28


Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C)

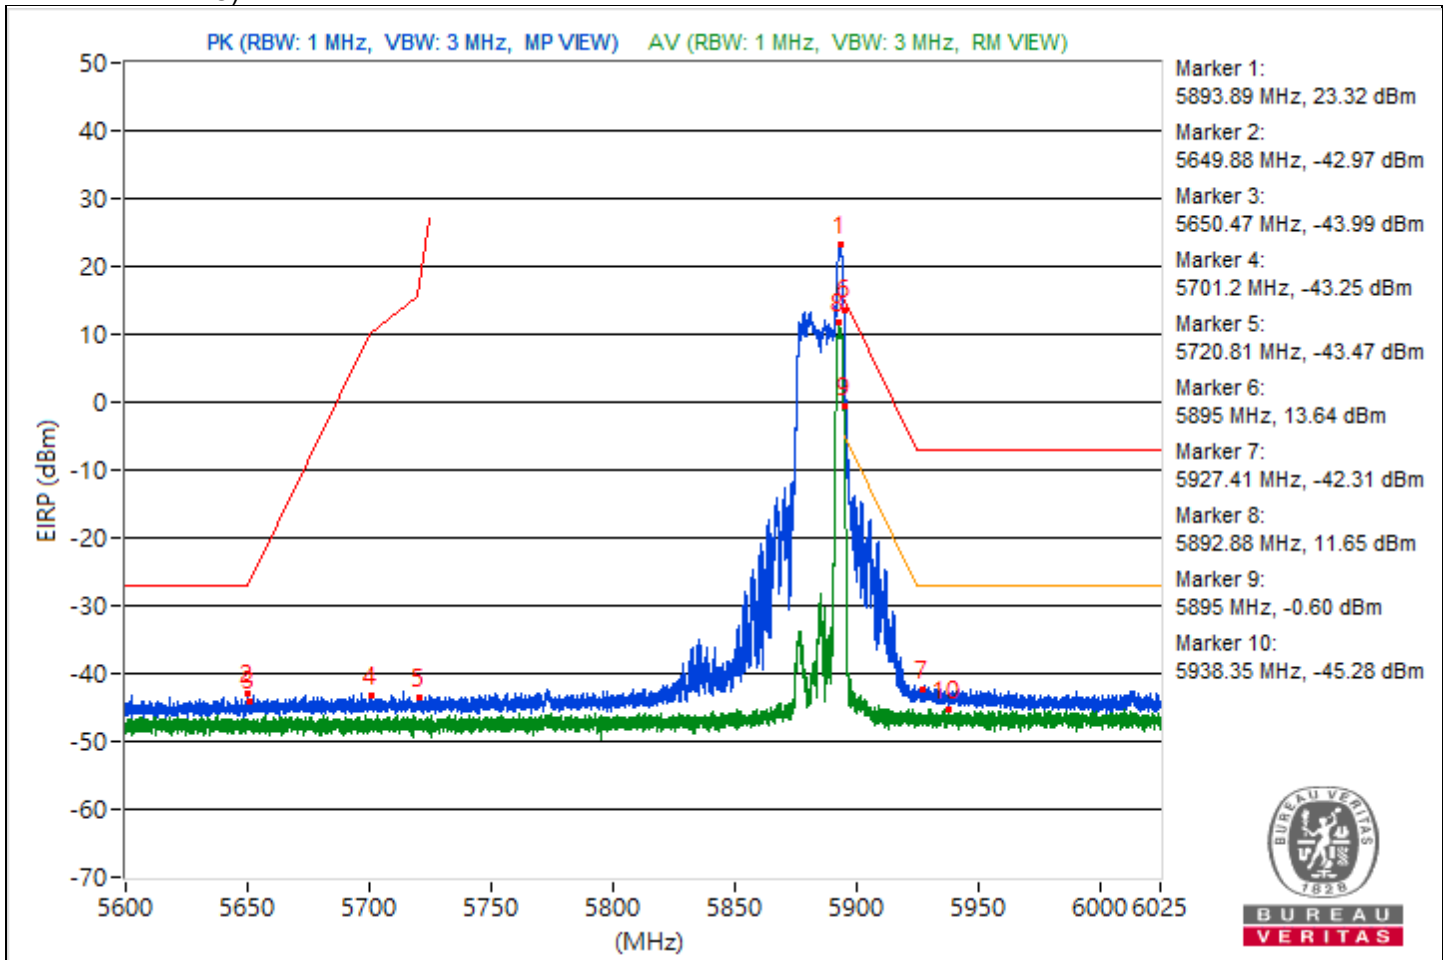


AV Integration method

Chain 0

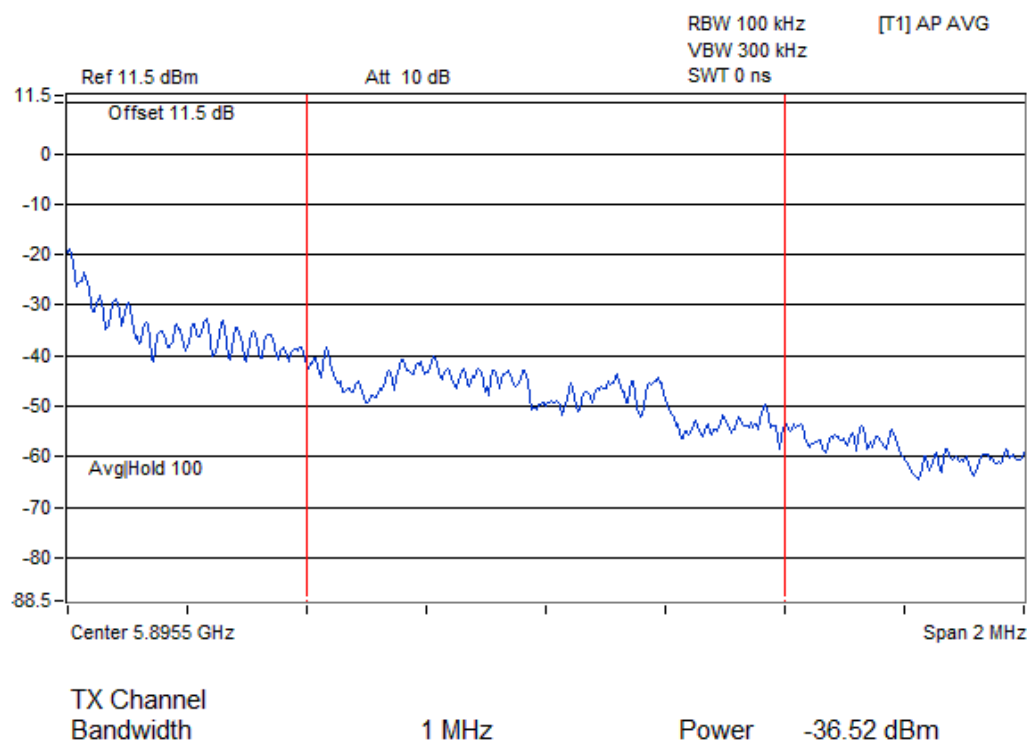

Chain 1

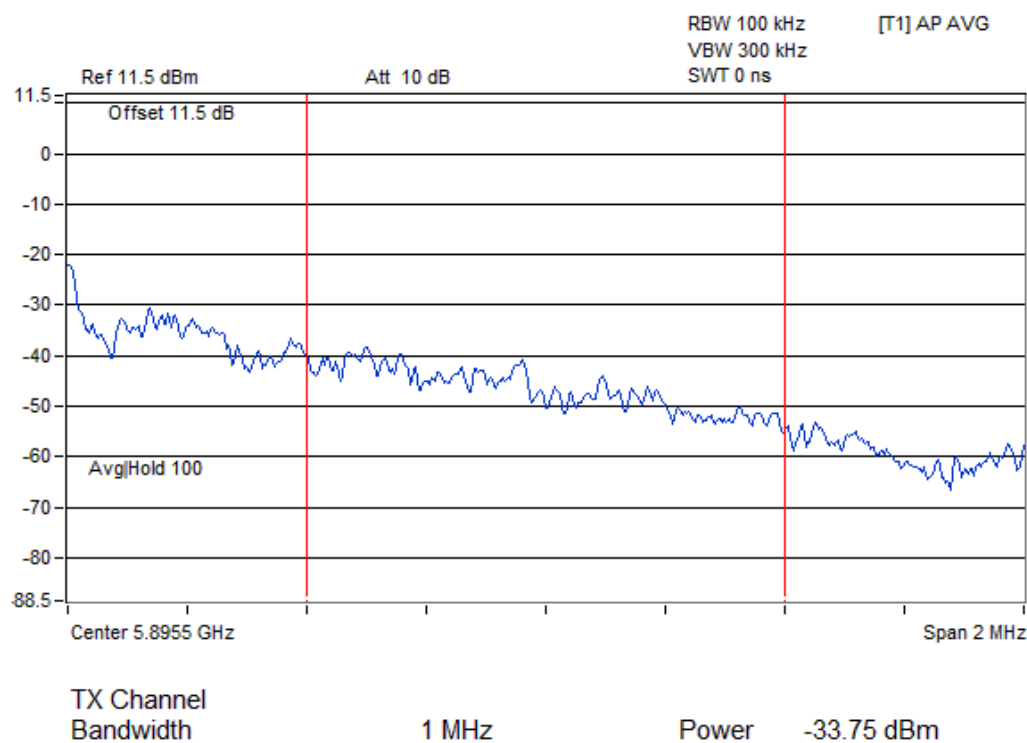


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.94	119.76 PK			17.32	15.66	4.92	24.5
2	#5643.3	53.17 PK	68.26	-15.09	-48.64	-52.06	4.92	-42.09
3	#5650.31	52.51 PK	68.49	-15.98	-49.52	-52.27	4.92	-42.75
4	#5700.62	53.26 PK	105.43	-52.17	-51.02	-49.06	4.92	-42
5	#5720.12	53.25 PK	111.12	-57.87	-50	-49.88	4.92	-42.01
6	#5924.65	53.14 PK	88.52	-35.38	-50.42	-49.71	4.92	-42.12
7	#5941.91	53.47 PK	88.26	-34.79	-48.56	-51.33	4.92	-41.79
8	*5836.67	108.41 AV			-2.64	7.86	4.92	13.15
9	#5924.86	49.44 AV	68.36	-18.92	-52.99	-54.68	4.92	-45.82
10	#5955.99	50.13 AV	68.26	-18.13	-52.14	-54.23	4.92	-45.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

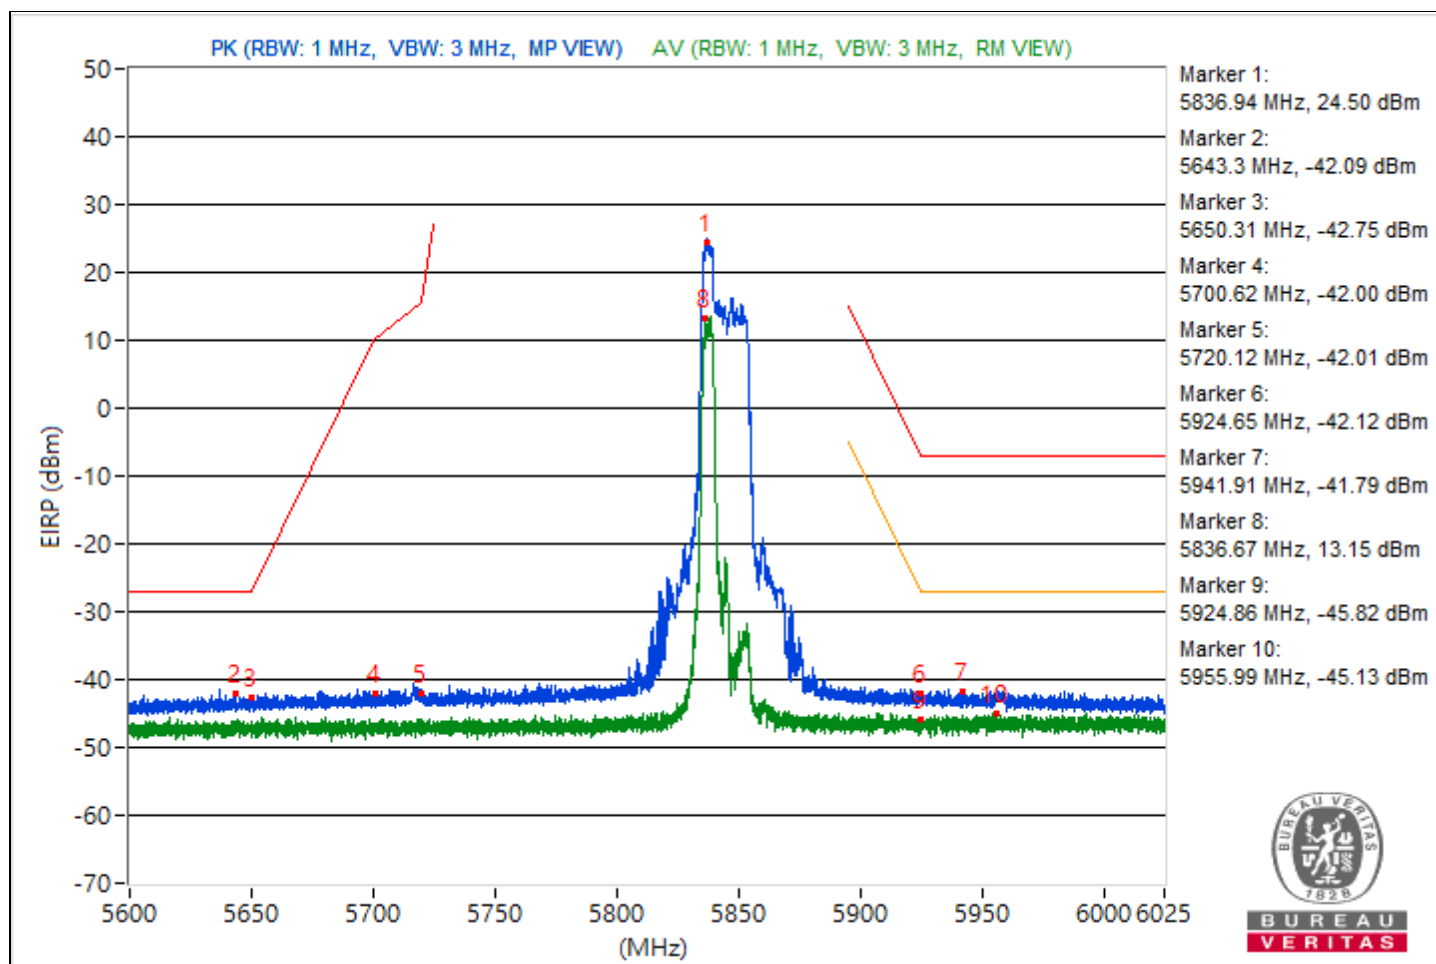


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5858.77	120.15 PK			18.37	14.87	4.92	24.89
2	#5610.57	57.14 PK	68.26	-11.12	-44.74	-47.95	4.92	-38.12
3	#5650.1	56.33 PK	68.33	-12	-48.43	-45.71	4.92	-38.93
4	#5706.04	57.88 PK	106.95	-49.07	-44.41	-46.46	4.92	-37.38
5	#5720.38	56.64 PK	111.73	-55.09	-46.69	-46.42	4.92	-38.62
6	#5924.91	57.39 PK	88.32	-30.93	-46.94	-44.9	4.92	-37.87
7	#6000.08	58.87 PK	88.26	-29.39	-46.55	-42.85	4.92	-36.39
8	*5857.28	109.22 AV			7.51	3.75	4.92	13.96
9	#5923.53	49.76 AV	69.34	-19.58	-54.55	-52.53	4.92	-45.5
10	#5982.23	50.41 AV	68.26	-17.85	-51.92	-53.87	4.92	-44.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

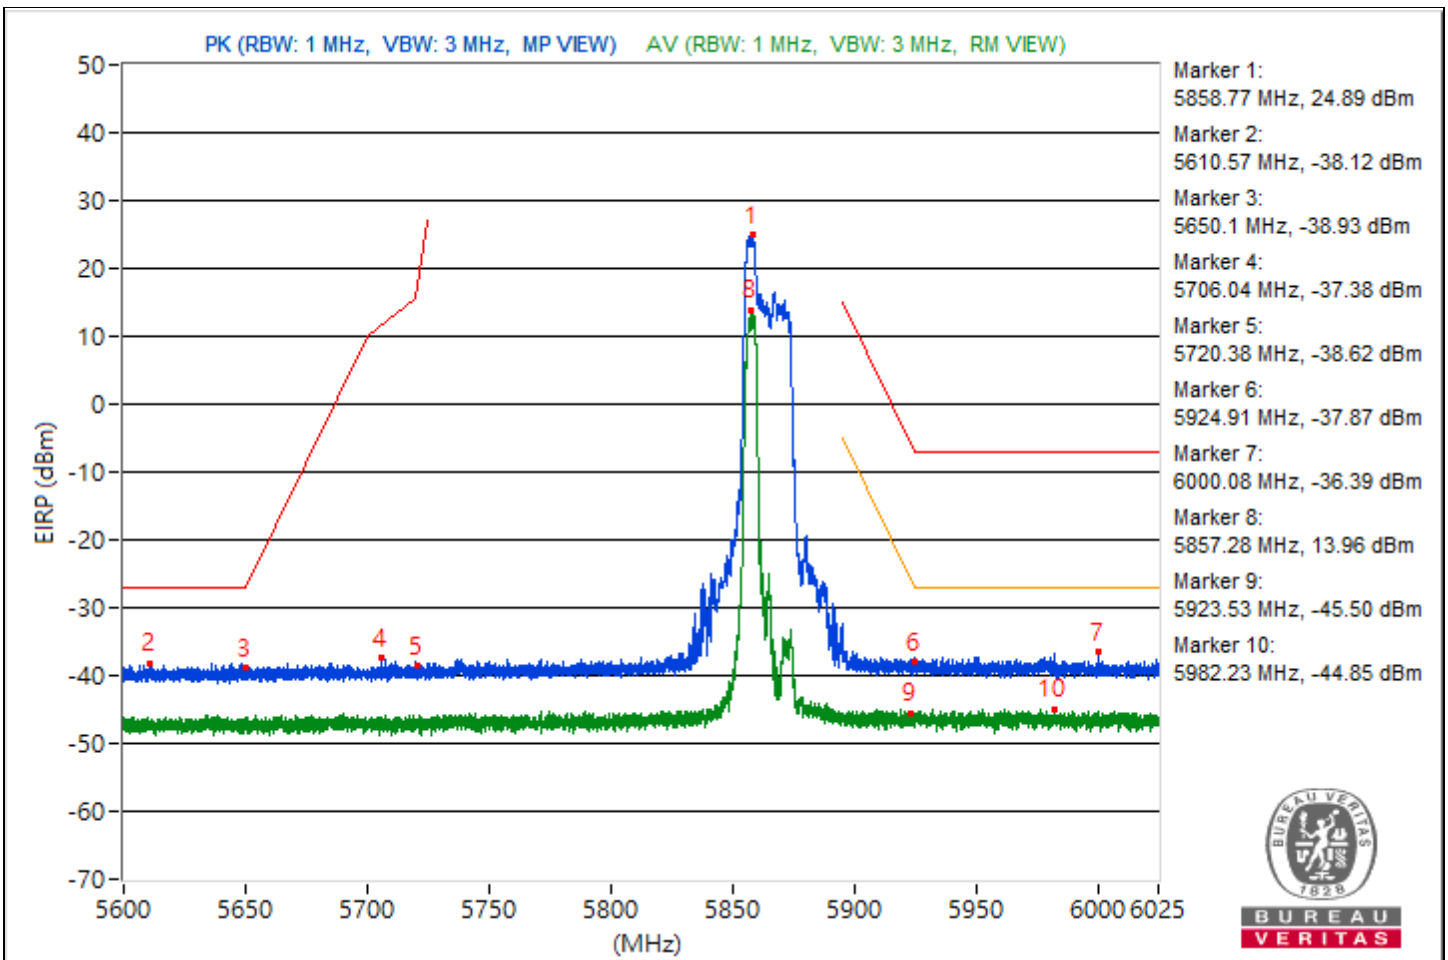


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5892.45	119.58 PK			15.04	17.42	4.92	24.32
2	#5634.37	55.34 PK	68.26	-12.92	-52.62	-45.64	4.92	-39.92
3	#5651.16	56.03 PK	69.12	-13.09	-49.18	-45.79	4.92	-39.23
4	#5702.58	55.73 PK	105.98	-50.25	-50.88	-45.57	4.92	-39.53
5	#5720.01	54.29 PK	110.88	-56.59	-51.07	-47.46	4.92	-40.97
6	#5895	109.03 PK	110.26	-1.23	6.02	5.65	4.92	13.77
7	#5948.07	56.99 PK	88.26	-31.27	-50.63	-44.05	4.92	-38.27
8	*5891.28	108.63 AV			1.41	7.5	4.92	13.37
9	!#5895	70.25 AV	90.26	-20.01	-33.58	-32.38	4.92	-25.01
10	#5925.28	50.13 AV	68.26	-18.13	-51.76	-54.93	4.92	-45.13


Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C)

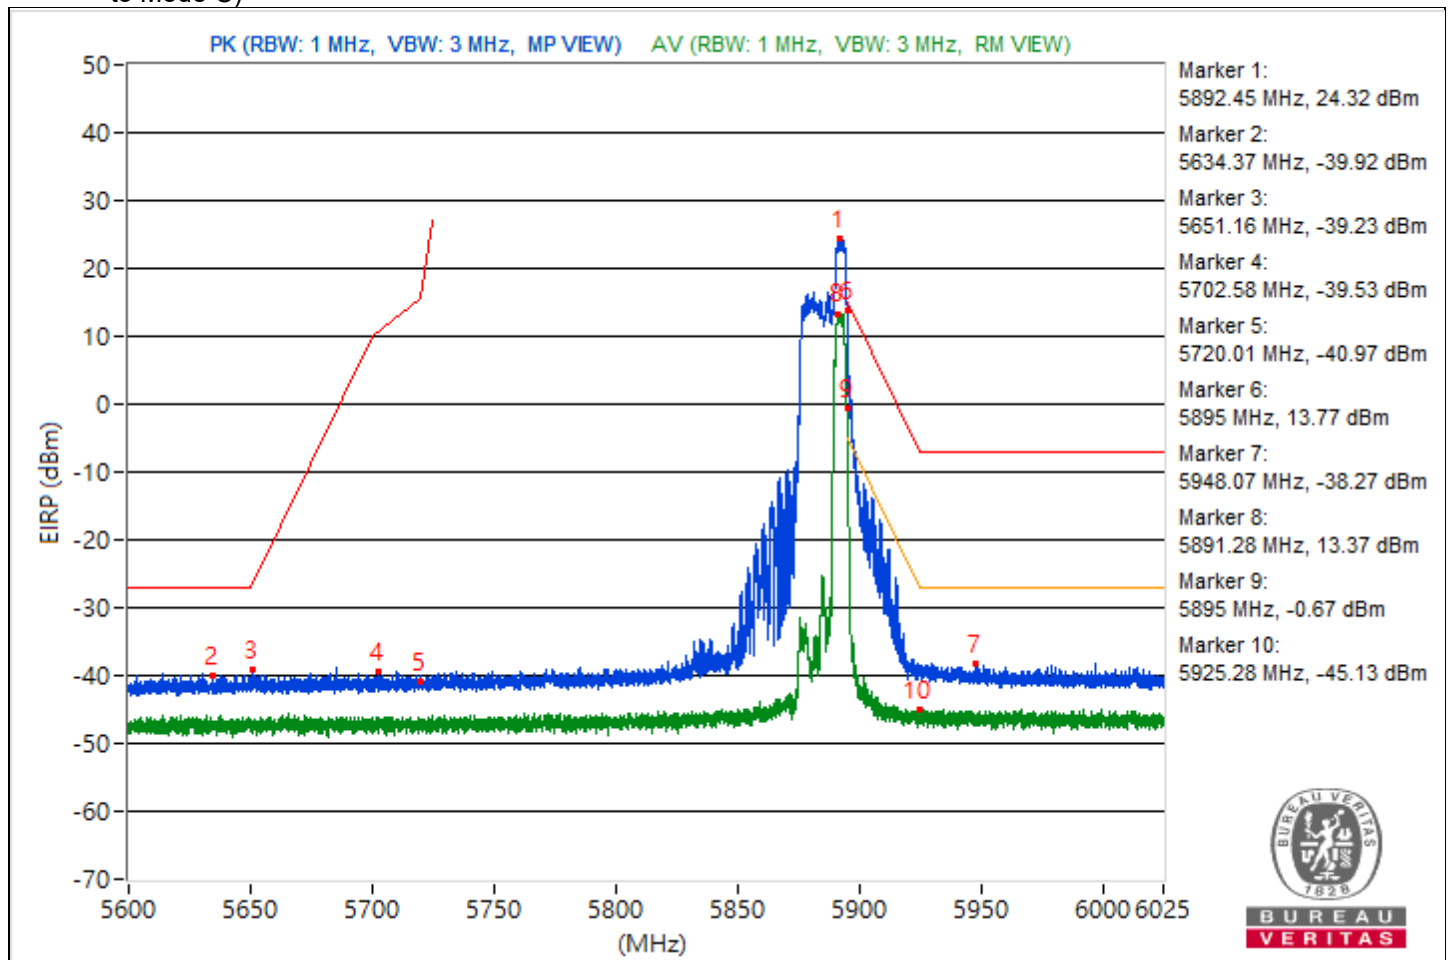


AV Integration method

Chain 0

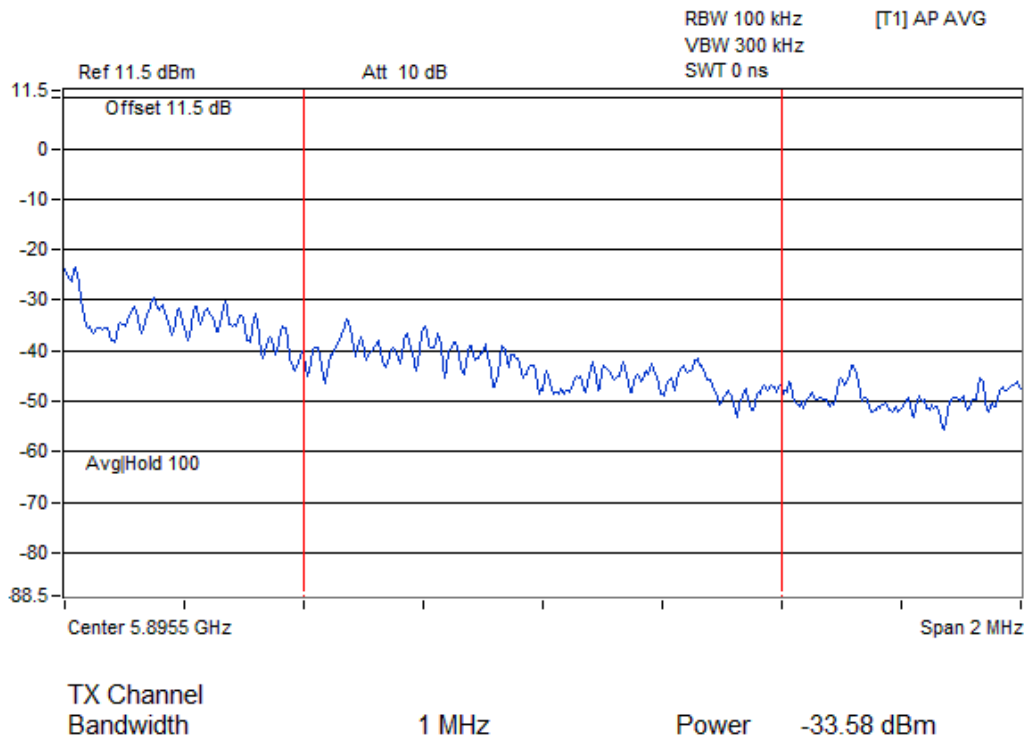

Chain 1

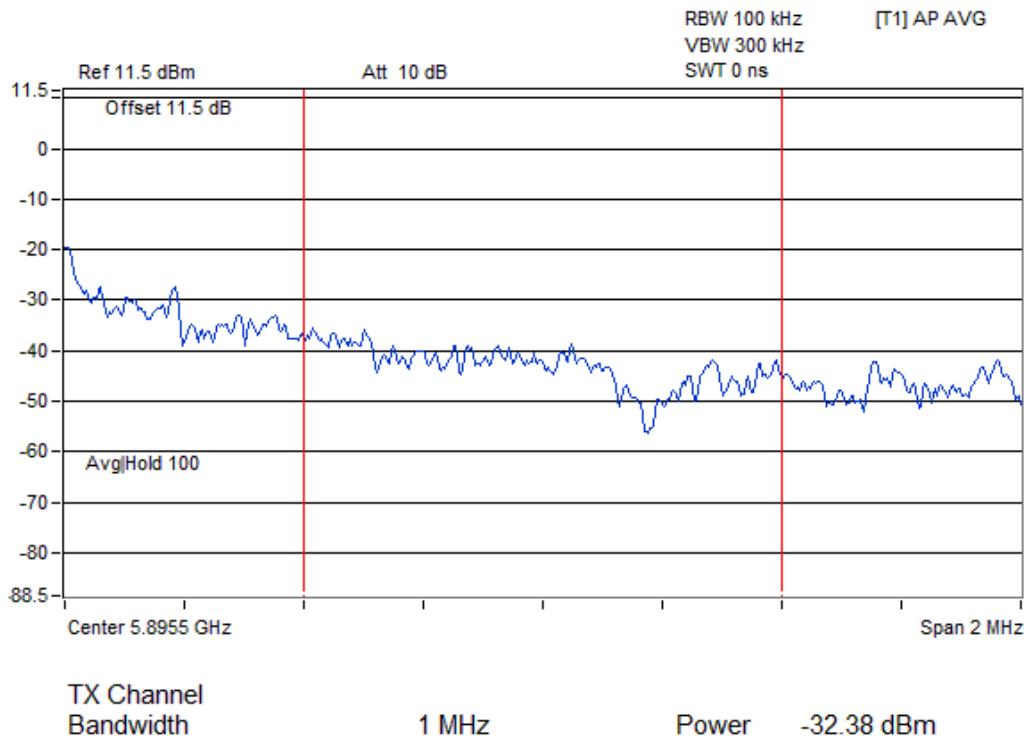


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5840.18	120.61 PK			16.13	18.41	4.92	25.35
2	#5615.41	53.37 PK	68.26	-14.89	-48.4	-51.96	4.92	-41.89
3	#5650.26	52.55 PK	68.45	-15.9	-50.11	-51.24	4.92	-42.71
4	#5703.7	54.32 PK	106.3	-51.98	-48.07	-49.87	4.92	-40.94
5	#5720.27	54.3 PK	111.49	-57.19	-48.79	-49	4.92	-40.96
6	#5924.75	54.55 PK	88.44	-33.89	-49.99	-47.61	4.92	-40.71
7	#5943.29	54.9 PK	88.26	-33.36	-46.85	-50.46	4.92	-40.36
8	*5842.09	110.3 AV			5.24	8.41	4.92	15.04
9	#5924.86	49.5 AV	68.36	-18.86	-53.67	-53.72	4.92	-45.76
10	#6016.18	50.15 AV	68.26	-18.11	-51.85	-54.67	4.92	-45.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

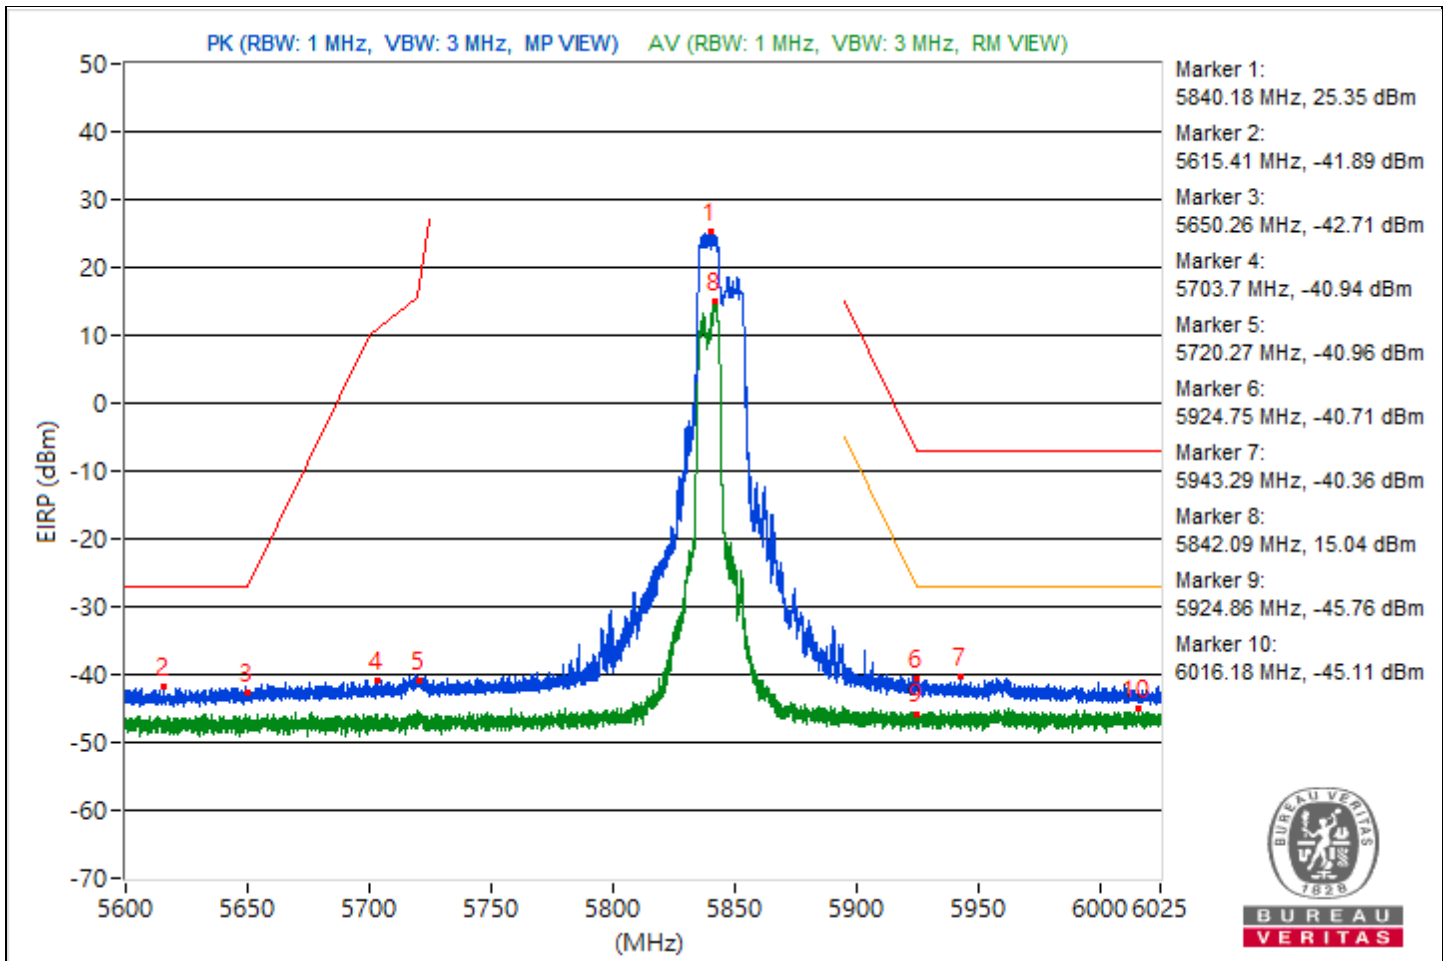


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5859.83	120.72 PK			16.6	18.3	4.92	25.46
2	#5607.23	57.37 PK	68.26	-10.89	-44.72	-47.29	4.92	-37.89
3	#5650.15	56.59 PK	68.37	-11.78	-45.73	-47.69	4.92	-38.67
4	#5700.03	56.53 PK	105.27	-48.74	-47.39	-46.03	4.92	-38.73
5	#5720.17	56.95 PK	111.24	-54.29	-46.44	-46.06	4.92	-38.31
6	#5923.58	59.32 PK	89.3	-29.98	-46.4	-42.29	4.92	-35.94
7	#5932.46	58.25 PK	88.26	-30.01	-43.84	-46.4	4.92	-37.01
8	*5862.49	110.81 AV			7.69	7.54	4.92	15.55
9	#5924.86	49.3 AV	68.36	-19.06	-53.84	-53.95	4.92	-45.96
10	#5956.42	50.31 AV	68.26	-17.95	-53.78	-52.14	4.92	-44.95

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

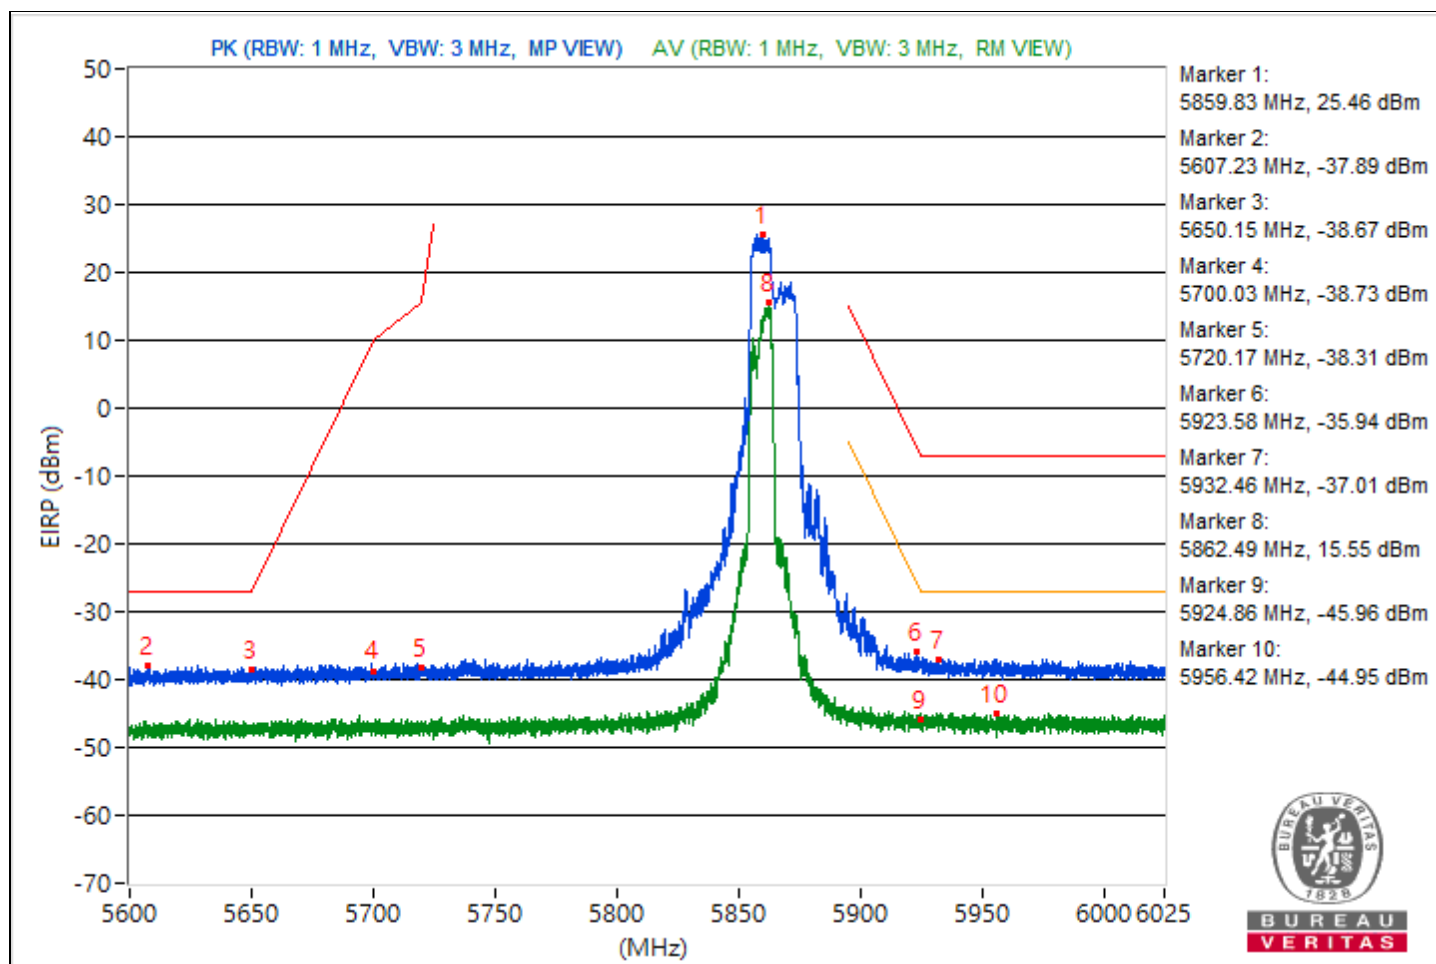

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5890.17	120.43 PK			18.72	14.99	4.92	25.17
2	#5643.03	53 PK	68.26	-15.26	-48.68	-52.51	4.92	-42.26
3	#5650.52	53.43 PK	68.65	-15.22	-48.06	-52.59	4.92	-41.83
4	#5703.12	53.35 PK	106.13	-52.78	-48.7	-51.39	4.92	-41.91
5	#5720.01	52.6 PK	110.88	-58.28	-50.43	-50.76	4.92	-42.66
6	#5895	110.25 PK	110.26	-0.01	7.16	6.96	4.92	14.99
7	#5925.39	57.64 PK	88.26	-30.62	-45.39	-45.73	4.92	-37.62
8	*5888.2	109.3 AV			6.26	5.96	4.92	14.04
9	!#5895	80.61 AV	90.26	-9.65	-22.89	-22.29	4.92	-14.65
10	#5927.25	50.11 AV	68.26	-18.15	-55.21	-51.66	4.92	-45.15

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C)

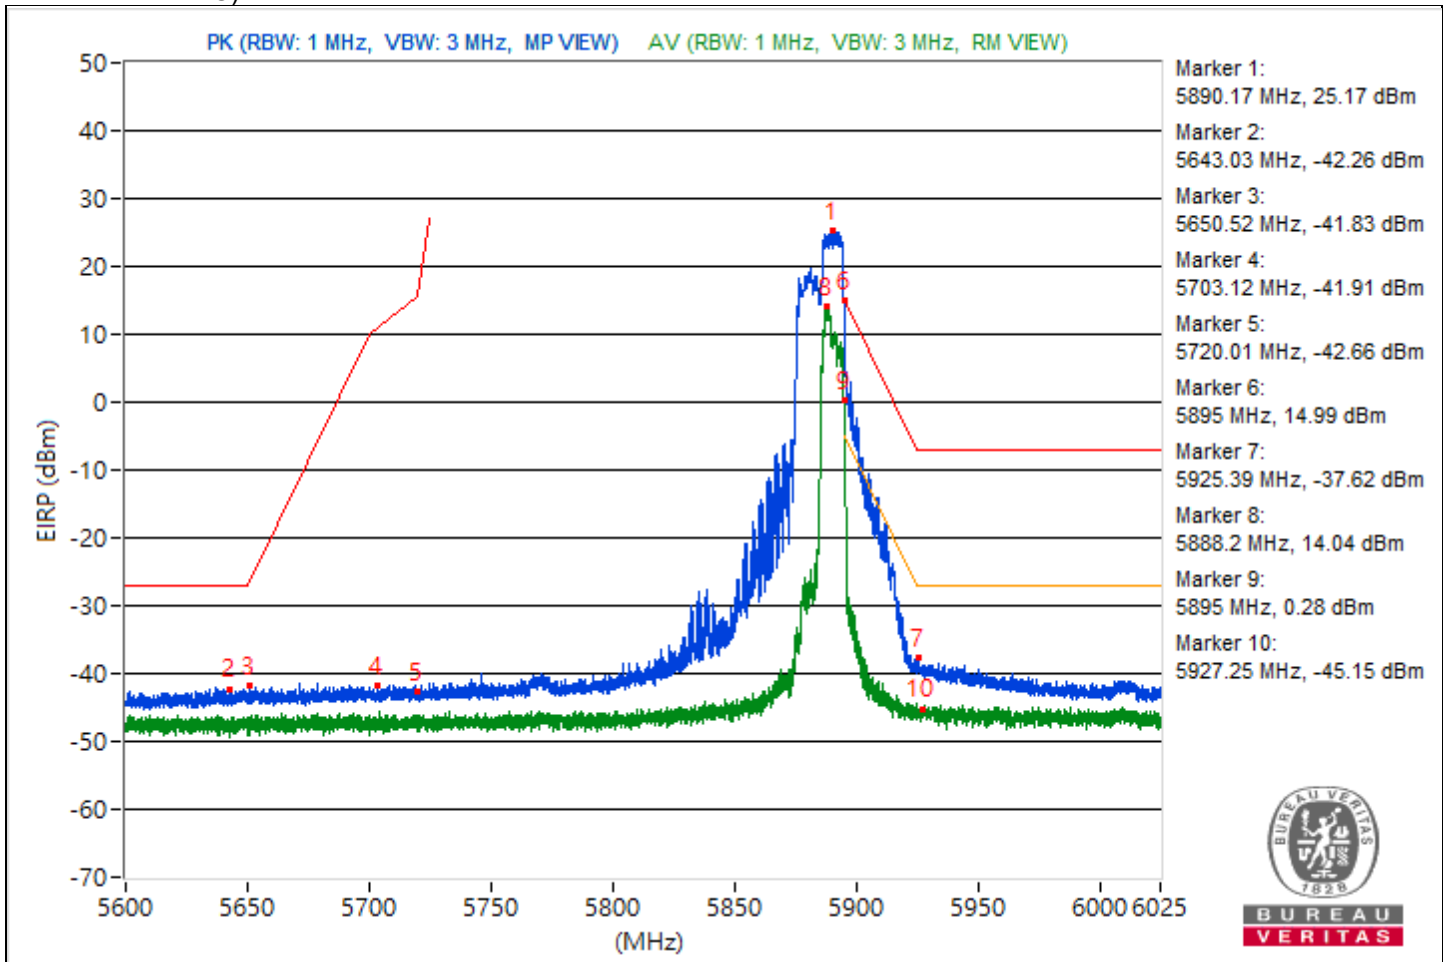


AV Integration method

Chain 0

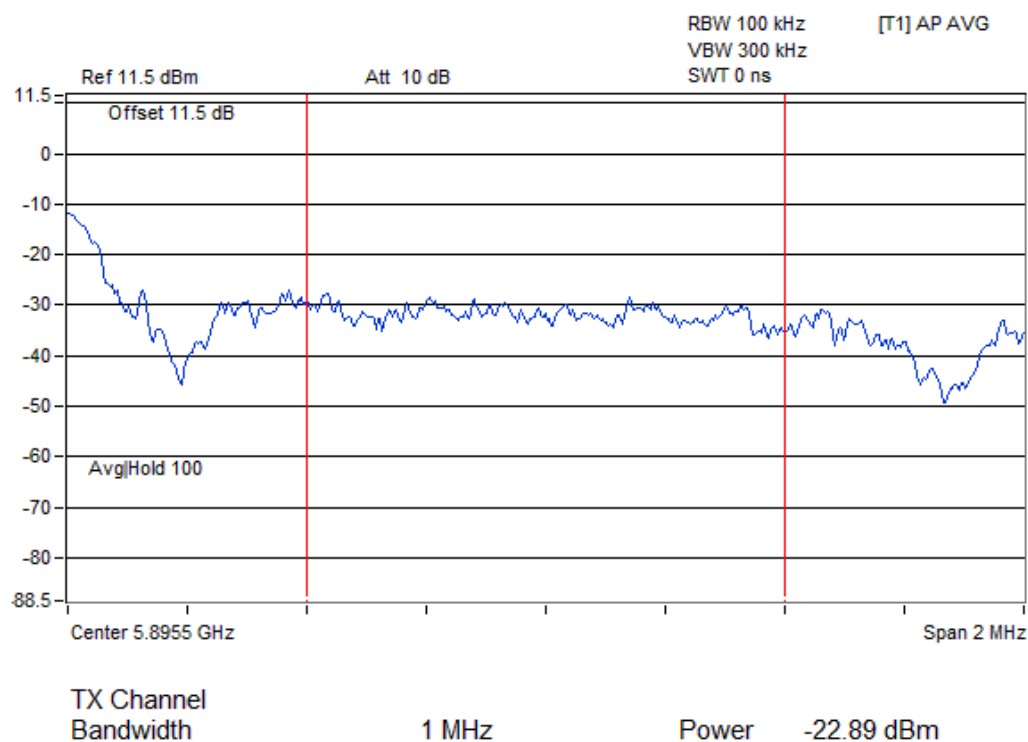

Chain 1

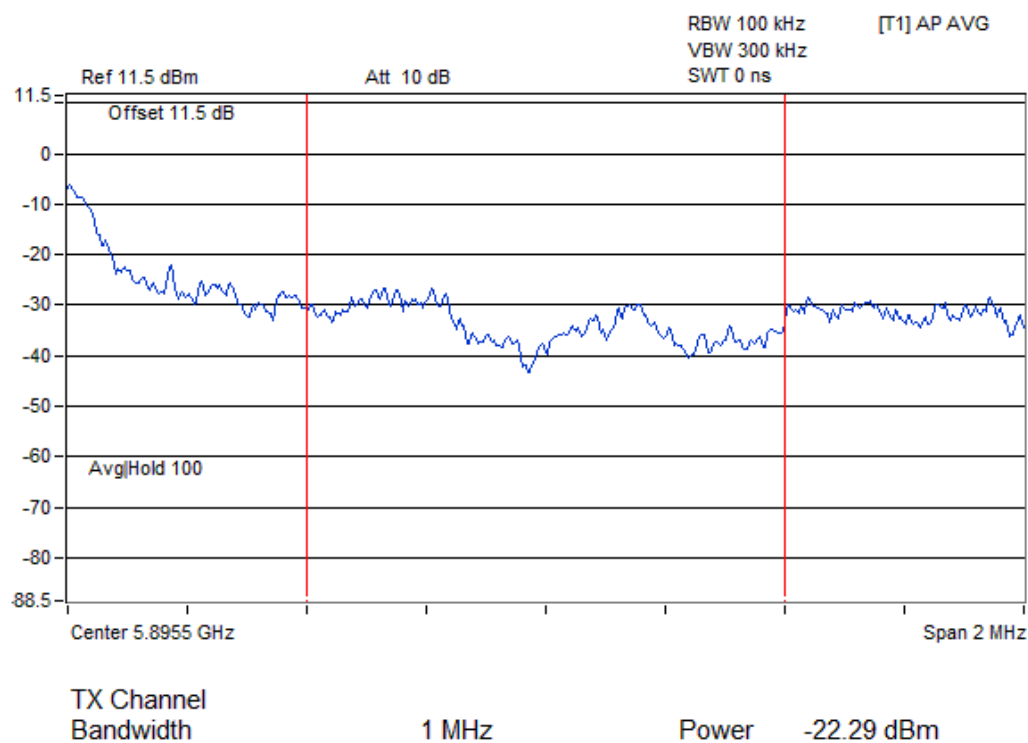


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5842.68	120.22 PK			16.15	17.75	4.92	24.96
2	#5640.64	53.48 PK	68.26	-14.78	-48.42	-51.56	4.92	-41.78
3	#5650.47	53.13 PK	68.61	-15.48	-49.01	-51.45	4.92	-42.13
4	#5700.88	53.59 PK	105.51	-51.92	-49.41	-49.8	4.92	-41.67
5	#5720.43	54.77 PK	111.85	-57.08	-48.95	-47.94	4.92	-40.49
6	#5924.7	53.58 PK	88.48	-34.9	-50.22	-49.07	4.92	-41.68
7	#5961.46	54.98 PK	88.26	-33.28	-47.54	-48.99	4.92	-40.28
8	*5838.21	108.2 AV			-5.34	7.81	4.92	12.94
9	#5923.9	49.72 AV	69.06	-19.34	-52.29	-55.11	4.92	-45.54
10	#5983.83	50.21 AV	68.26	-18.05	-52.04	-54.19	4.92	-45.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

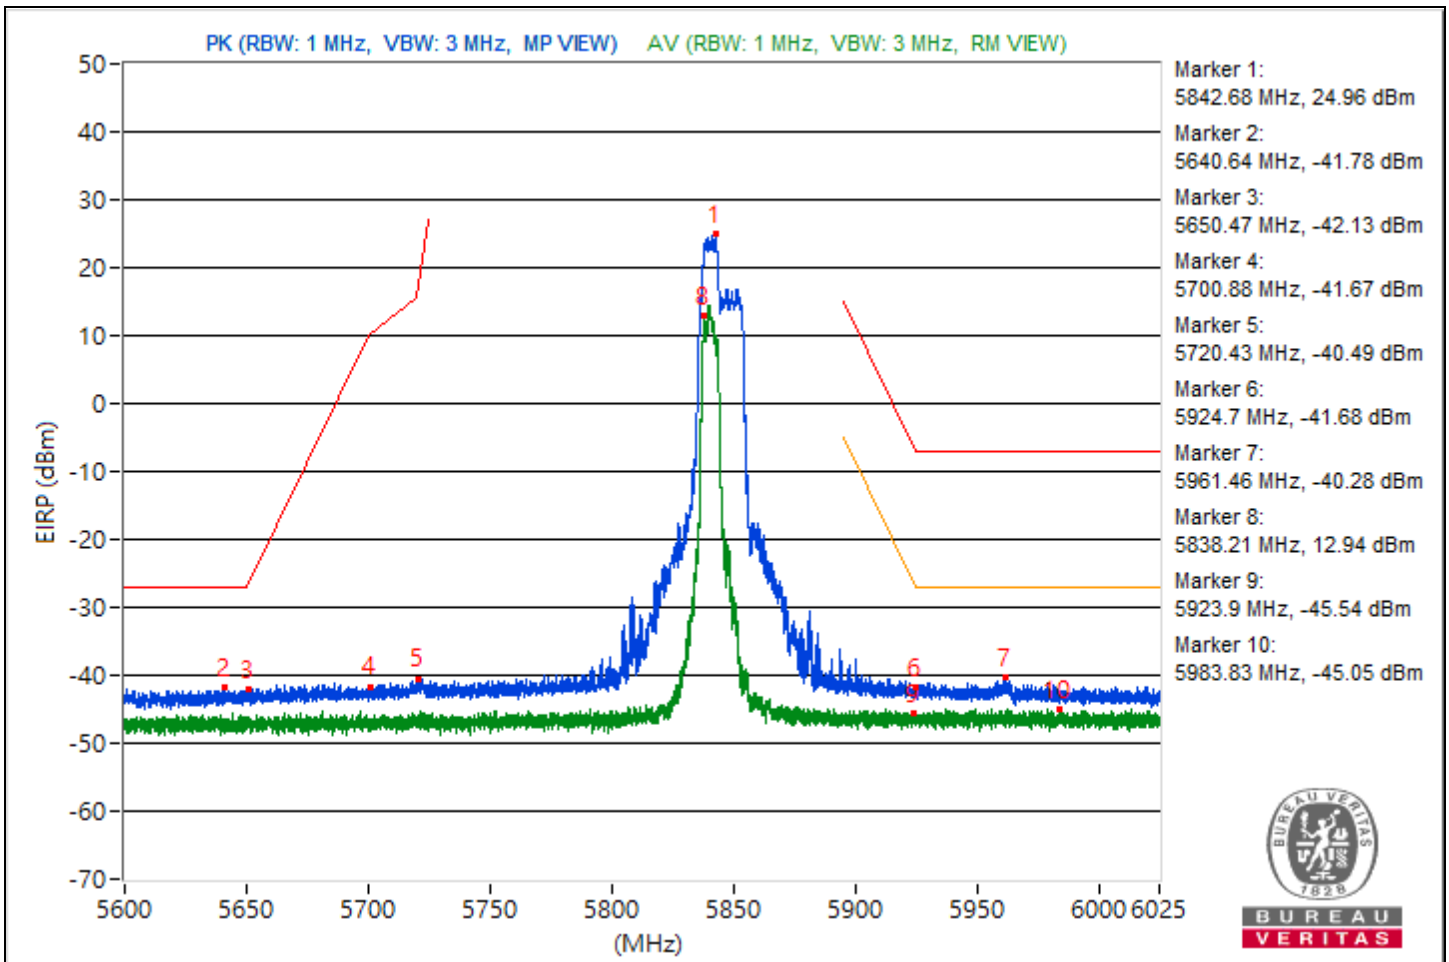


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5862.38	120.07 PK			17.91	15.54	4.92	24.81
2	#5648.93	56.9 PK	68.26	-11.36	-48.24	-44.95	4.92	-38.36
3	#5650.95	56.32 PK	68.96	-12.64	-47.97	-45.99	4.92	-38.94
4	#5700.73	57.02 PK	105.46	-48.44	-46.98	-45.48	4.92	-38.24
5	#5720.27	56.53 PK	111.49	-54.96	-46.35	-46.99	4.92	-38.73
6	#5924.75	57.55 PK	88.44	-30.89	-45.4	-45.89	4.92	-37.71
7	#5981.17	58.21 PK	88.26	-30.05	-43.4	-47.5	4.92	-37.05
8	*5858.03	108.51 AV			4	6.33	4.92	13.25
9	#5924.59	49.89 AV	68.56	-18.67	-53.29	-53.31	4.92	-45.37
10	#5936.02	50.74 AV	68.26	-17.52	-52.79	-52.14	4.92	-44.52

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

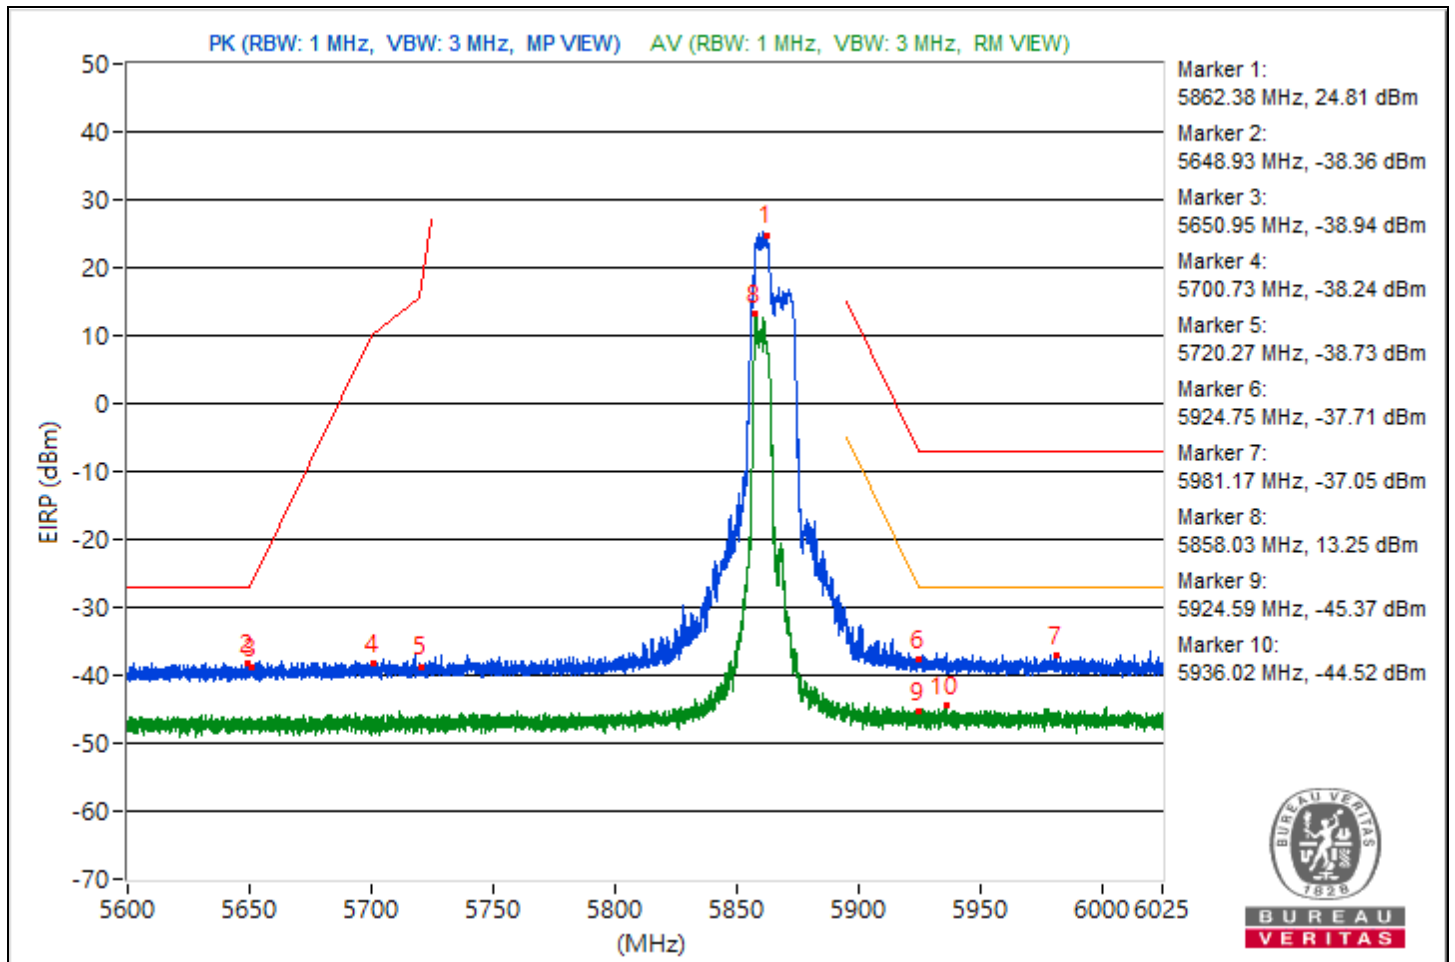


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5891.71	120.29 PK			18.2	15.61	4.92	25.03
2	#5649.88	53.87 PK	68.26	-14.39	-49.99	-48.74	4.92	-41.39
3	#5650.89	52.54 PK	68.92	-16.38	-51.16	-50.19	4.92	-42.72
4	#5700.57	52.9 PK	105.42	-52.52	-49.11	-51.93	4.92	-42.36
5	#5720.33	52.7 PK	111.61	-58.91	-50.25	-50.74	4.92	-42.56
6	#5895.37	95.19 PK	109.98	-14.79	-11.5	-6.08	4.92	-0.07
7	#5930.7	61.73 PK	88.26	-26.53	-48.96	-38.86	4.92	-33.53
8	*5886.93	108.1 AV			6.8	1.49	4.92	12.84
9	#5895.06	71.17 AV	90.22	-19.05	-42.19	-29.22	4.92	-24.09
10	#5937.77	50.62 AV	68.26	-17.64	-54.8	-51.11	4.92	-44.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

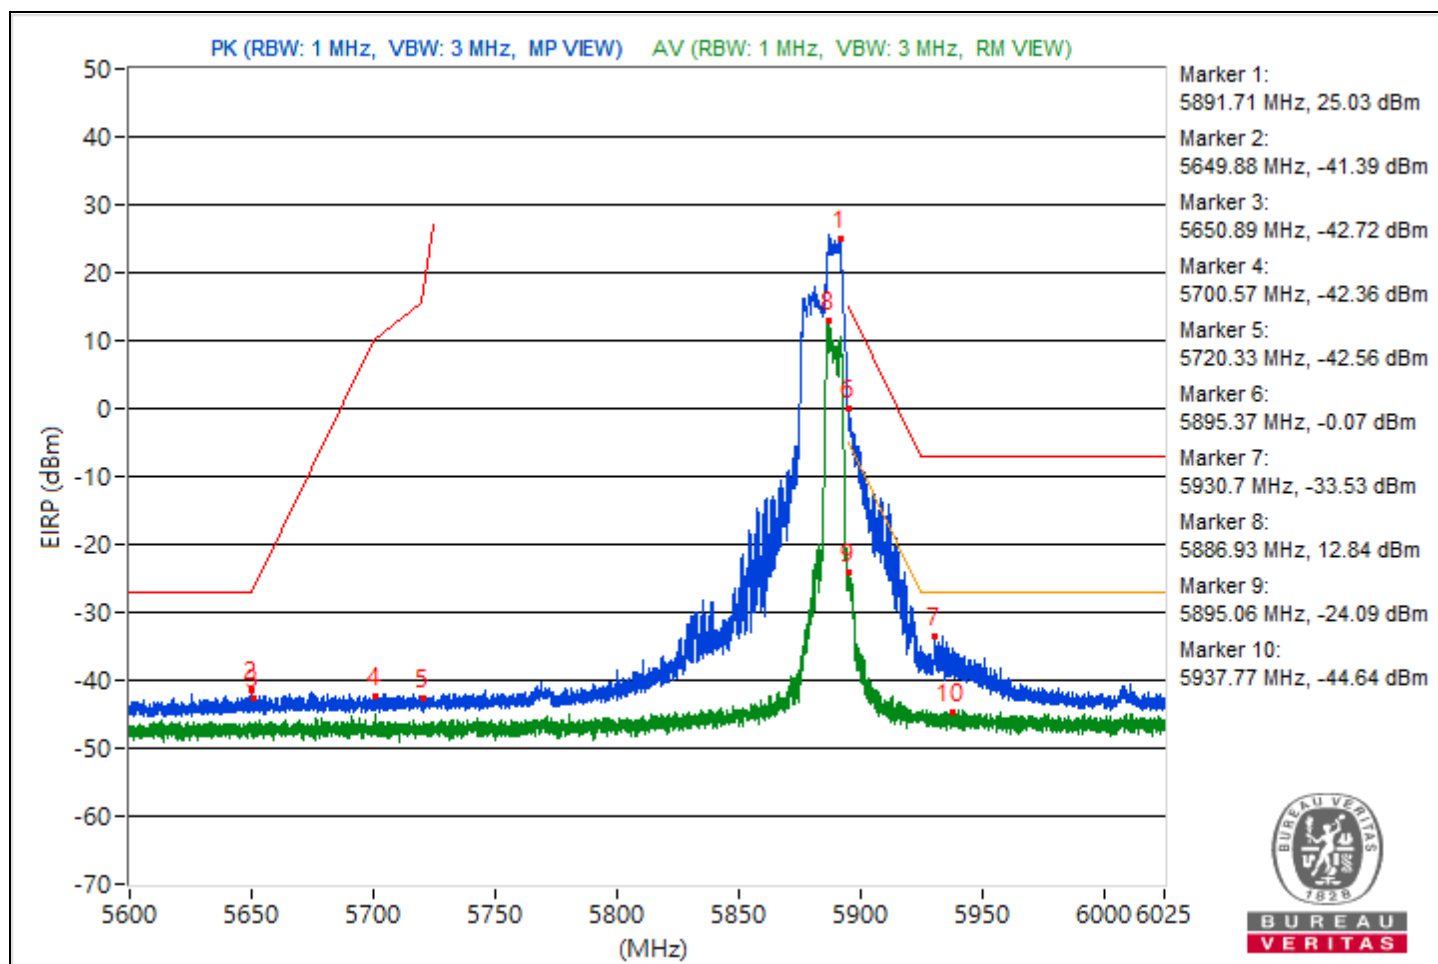


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5843.9	120.83 PK			17.86	17.42	4.92	25.57
2	#5632.78	53.13 PK	68.26	-15.13	-48.52	-52.48	4.92	-42.13
3	#5650.36	53.04 PK	68.53	-15.49	-49.37	-51.1	4.92	-42.22
4	#5703.33	54.14 PK	106.19	-52.05	-50.39	-48.02	4.92	-41.12
5	#5720.22	53.89 PK	111.37	-57.48	-48.64	-50.07	4.92	-41.37
6	#5924.33	54.05 PK	88.75	-34.7	-50.95	-47.87	4.92	-41.21
7	#5963.43	54.65 PK	88.26	-33.61	-47.3	-50.29	4.92	-40.61
8	*5845.86	108.44 AV			4.97	5.52	4.92	13.18
9	#5924.59	49.59 AV	68.56	-18.97	-53.7	-53.5	4.92	-45.67
10	#5932.62	50.06 AV	68.26	-18.2	-52.1	-54.5	4.92	-45.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

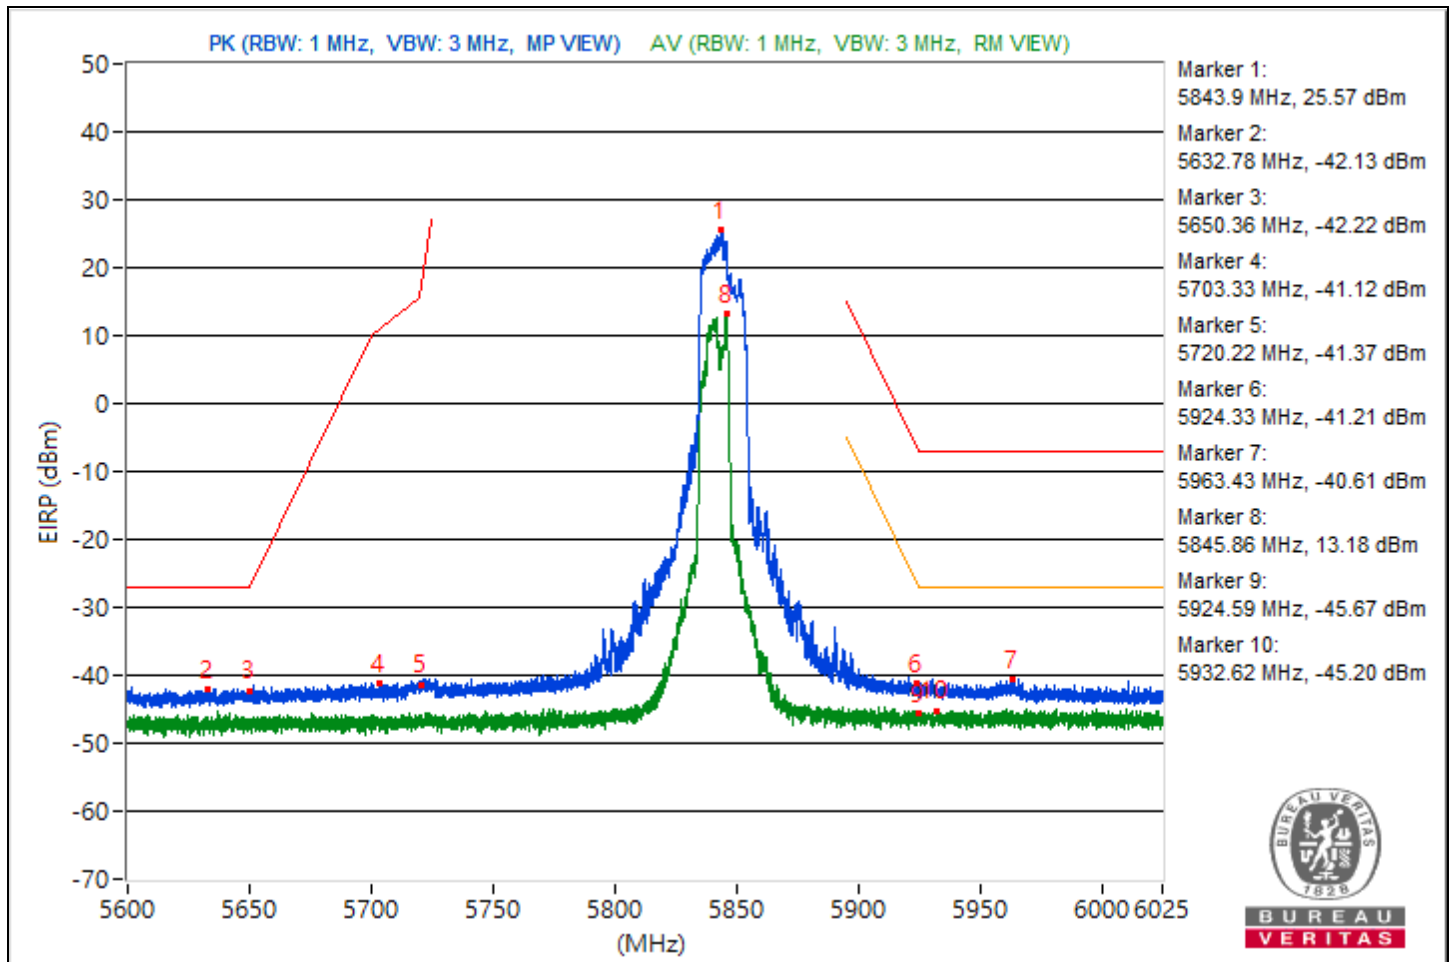


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5863.82	120.69 PK			15.86	18.68	4.92	25.43
2	#5601.43	57.48 PK	68.26	-10.78	-44.73	-46.99	4.92	-37.78
3	#5650.15	56.56 PK	68.37	-11.81	-46.52	-46.75	4.92	-38.7
4	#5700.99	57.12 PK	105.54	-48.42	-48.03	-44.72	4.92	-38.14
5	#5720.06	56.52 PK	111	-54.48	-46.03	-47.43	4.92	-38.74
6	#5924.49	58.69 PK	88.64	-29.95	-46.2	-43.28	4.92	-36.57
7	#5979.52	58.35 PK	88.26	-29.91	-43.71	-46.39	4.92	-36.91
8	*5863.66	109.91 AV			7.28	6.08	4.92	14.65
9	#5924.01	51.12 AV	68.99	-17.87	-53.09	-51.25	4.92	-44.14
10	#6023.94	50.42 AV	68.26	-17.84	-53.74	-51.98	4.92	-44.84

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

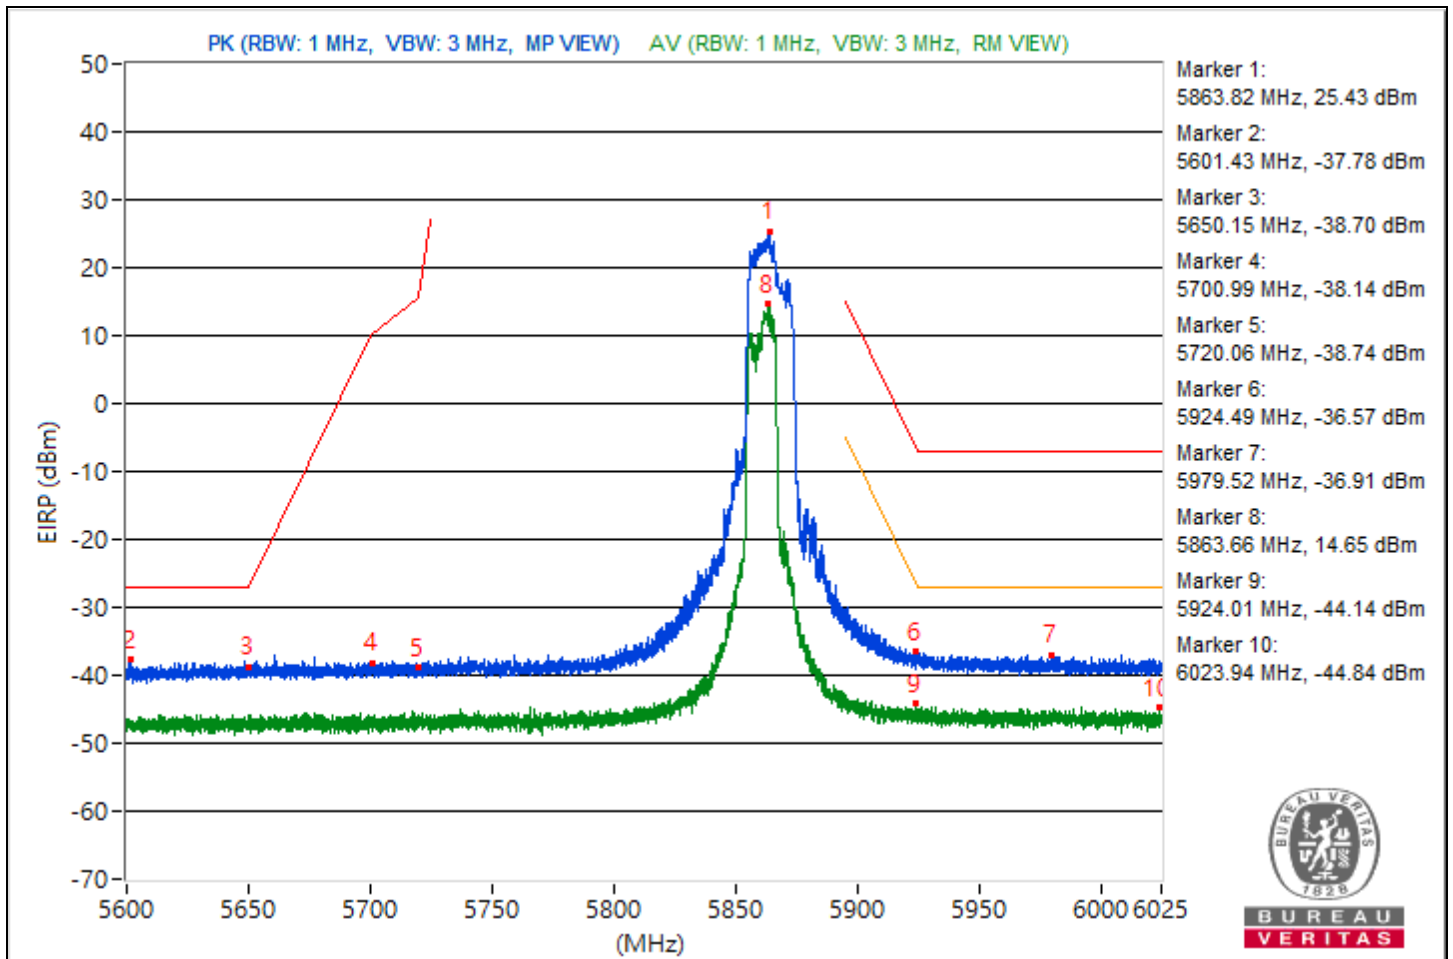

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin


Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5886.24	119.99 PK			17.3	16.24	4.92	24.73
2	#5641.28	53.03 PK	68.26	-15.23	-51.46	-49.15	4.92	-42.23
3	#5650.26	52.51 PK	68.45	-15.94	-49.91	-51.6	4.92	-42.75
4	#5702.16	53.25 PK	105.86	-52.61	-49.17	-50.87	4.92	-42.01
5	#5720.33	52.83 PK	111.61	-58.78	-49.46	-51.5	4.92	-42.43
6	#5895	106.16 PK	110.26	-4.1	1.75	3.91	4.92	10.9
7	#5938.19	62.72 PK	88.26	-25.54	-48.13	-37.85	4.92	-32.54
8	*5889.58	107.71 AV			6.38	1.18	4.92	12.45
9	!#5895.06	75.87 AV	90.22	-14.39	-27.58	-27.08	4.92	-19.39
10	#5929.75	51.54 AV	68.26	-16.72	-54.36	-49.99	4.92	-43.72

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.
 4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C)

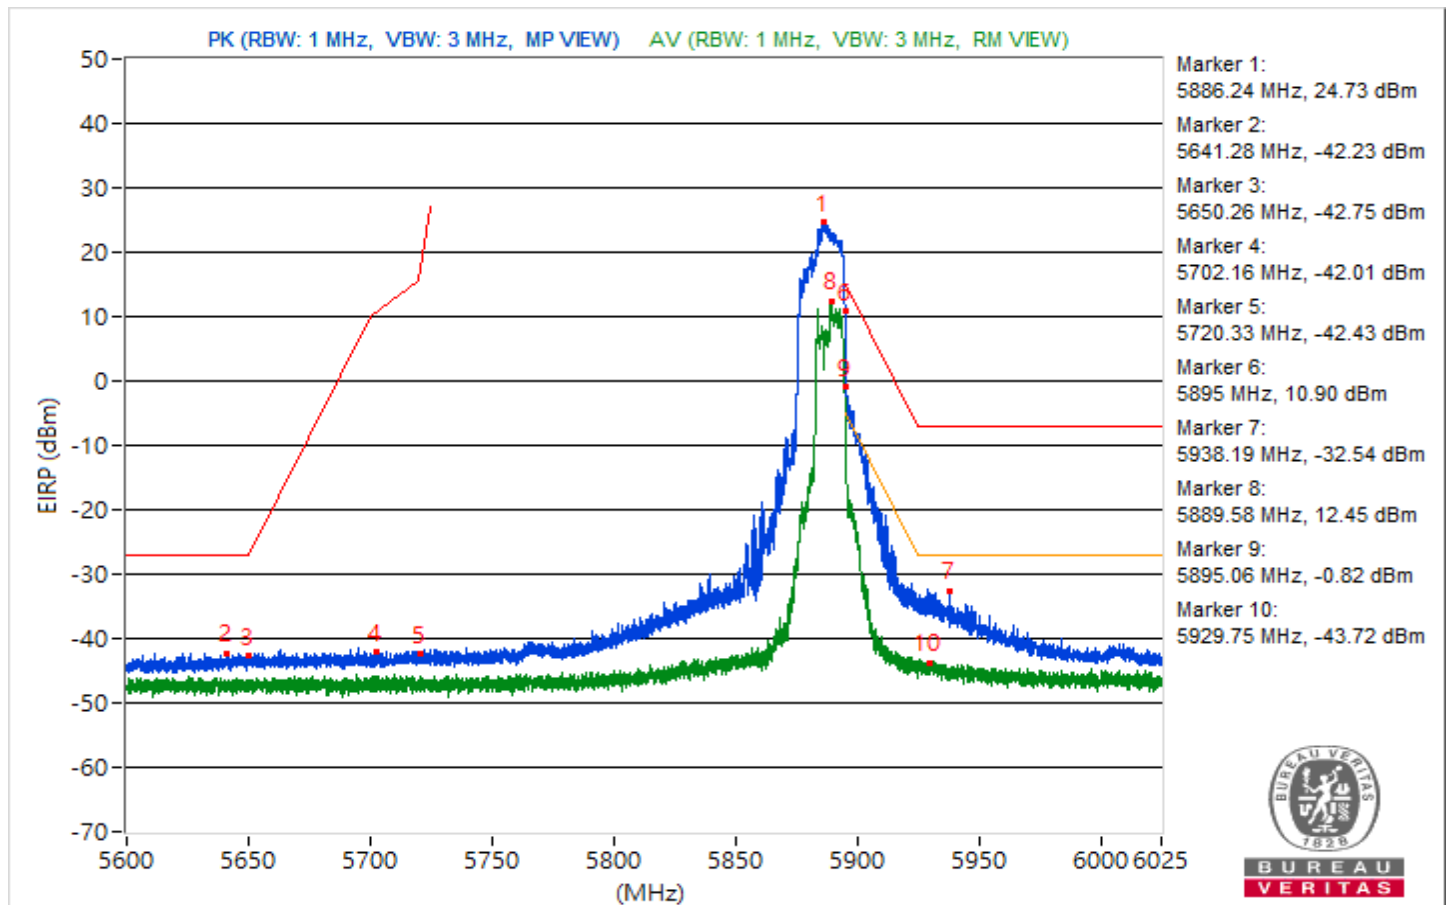


AV Integration method

Chain 0

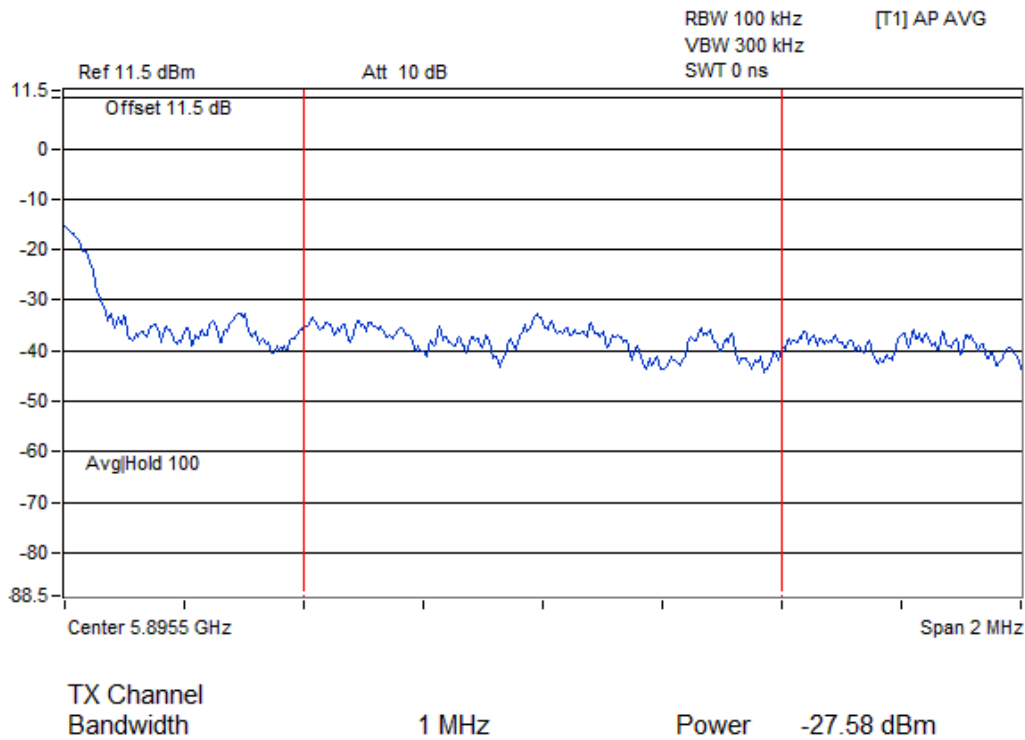

Chain 1

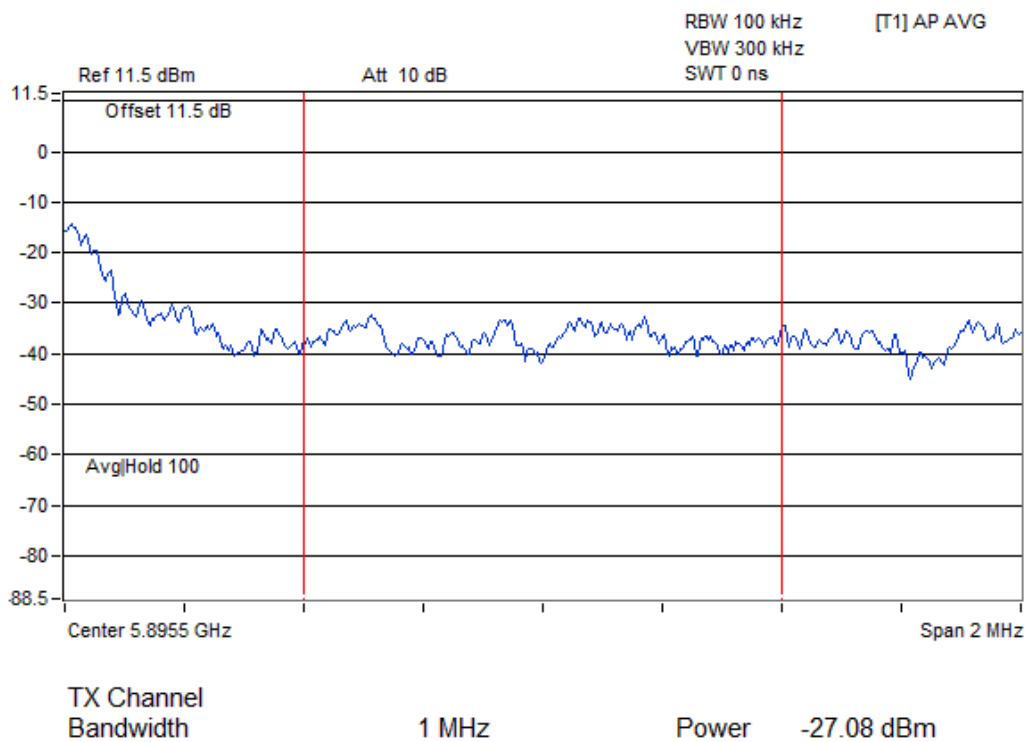


||

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 64% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5852.61	117.43 PK			11.65	15.85	4.92	22.17
2	#5634.05	56.91 PK	68.26	-11.35	-49.79	-44.36	4.92	-38.35
3	#5651.27	57.04 PK	69.2	-12.16	-44.35	-49.27	4.92	-38.22
4	#5702.48	61.76 PK	105.95	-44.19	-39.74	-44.22	4.92	-33.5
5	#5720.17	62.97 PK	111.24	-48.27	-41.07	-39.5	4.92	-32.29
6	#5921.67	81.18 PK	90.7	-9.52	-20.54	-24.24	4.92	-14.08
7	#5930.17	79.24 PK	88.26	-9.02	-24.15	-23.76	4.92	-16.02
8	*5860.05	105.89 AV			4.22	0.33	4.92	10.63
9	#5923.32	67.61 AV	69.49	-1.88	-35.28	-35.91	4.92	-27.65
10	#5926.13	67.45 AV	68.26	-0.81	-38.49	-34.07	4.92	-27.81

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

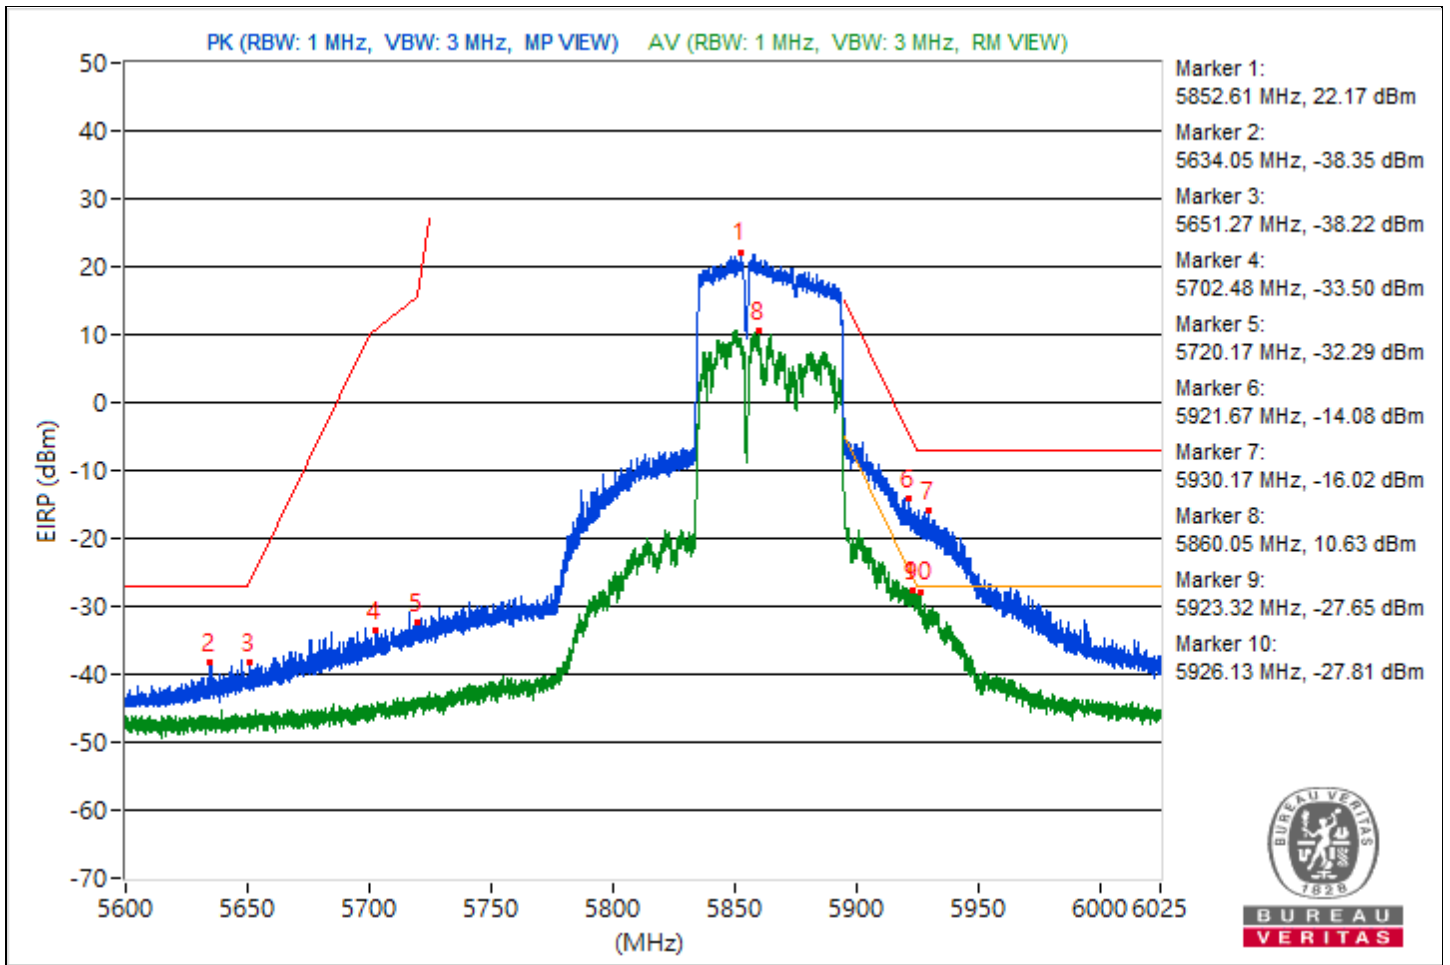


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5817.07	112.23 PK			9.93	7.93	4.92	16.97
2	#5649.3	67.8 PK	68.26	-0.46	-37.93	-33.8	4.92	-27.46
3	#5651.74	66.52 PK	69.55	-3.03	-39.51	-34.97	4.92	-28.74
4	#5702.69	70.72 PK	106.01	-35.29	-31.6	-33.56	4.92	-24.54
5	#5720.59	71.8 PK	112.21	-40.41	-30.83	-32.04	4.92	-23.46
6	#5918.22	73.79 PK	93.23	-19.44	-32.48	-27.61	4.92	-21.47
7	#5930.97	70.28 PK	88.26	-17.98	-34.96	-31.52	4.92	-24.98
8	*5819.62	100.4 AV			-4.98	-1.35	4.92	5.14
9	#5924.27	57.43 AV	68.79	-11.36	-45.56	-45.96	4.92	-37.83
10	#5925.12	57.57 AV	68.26	-10.69	-47.2	-44.47	4.92	-37.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

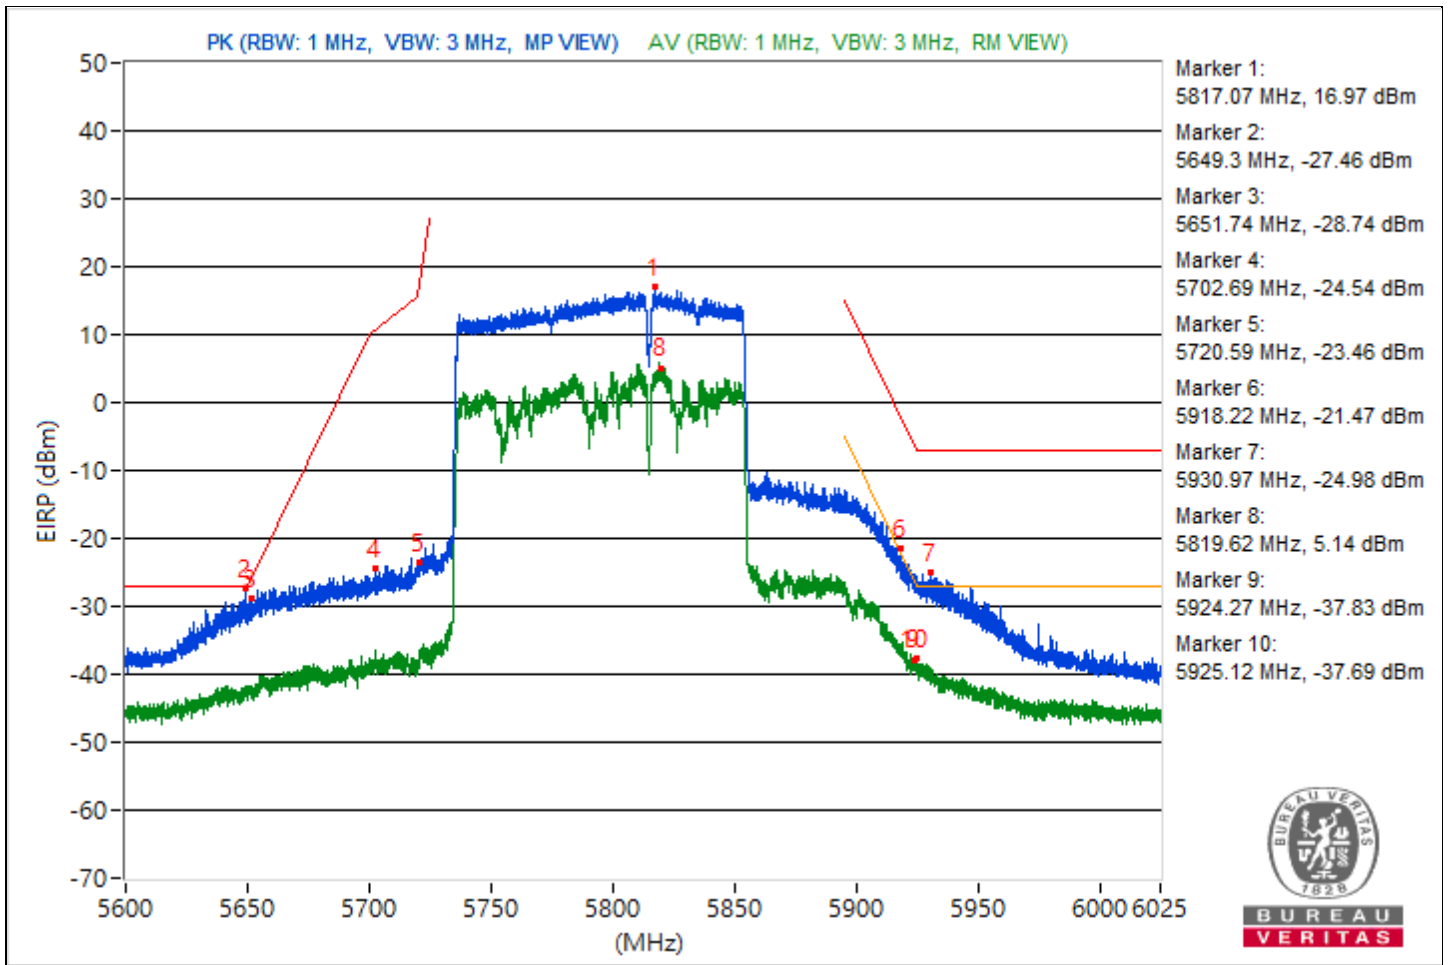


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Input Power	120 Vac, 60 Hz
Environmental Conditions	23°C, 62% RH	Tested By	Gary Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5818.66	111.76 PK			6.34	10.04	4.92	16.5
2	#5649.88	67.85 PK	68.26	-0.41	-34.23	-36.84	4.92	-27.41
3	#5654.4	68.42 PK	71.52	-3.1	-32.81	-38.46	4.92	-26.84
4	#5702.21	70.17 PK	105.88	-35.71	-32.19	-34.04	4.92	-25.09
5	#5720.17	72.39 PK	111.24	-38.85	-30.46	-31.18	4.92	-22.87
6	#5913.81	76.25 PK	96.47	-20.22	-25.25	-29.73	4.92	-19.01
7	#5939.2	71.9 PK	88.26	-16.36	-35.83	-29.12	4.92	-23.36
8	*5801.61	99.96 AV			-5.29	-1.84	4.92	4.7
9	#5924.01	58.79 AV	68.99	-10.2	-44.44	-44.35	4.92	-36.47
10	#5936.97	57.68 AV	68.26	-10.58	-44.79	-46.39	4.92	-37.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

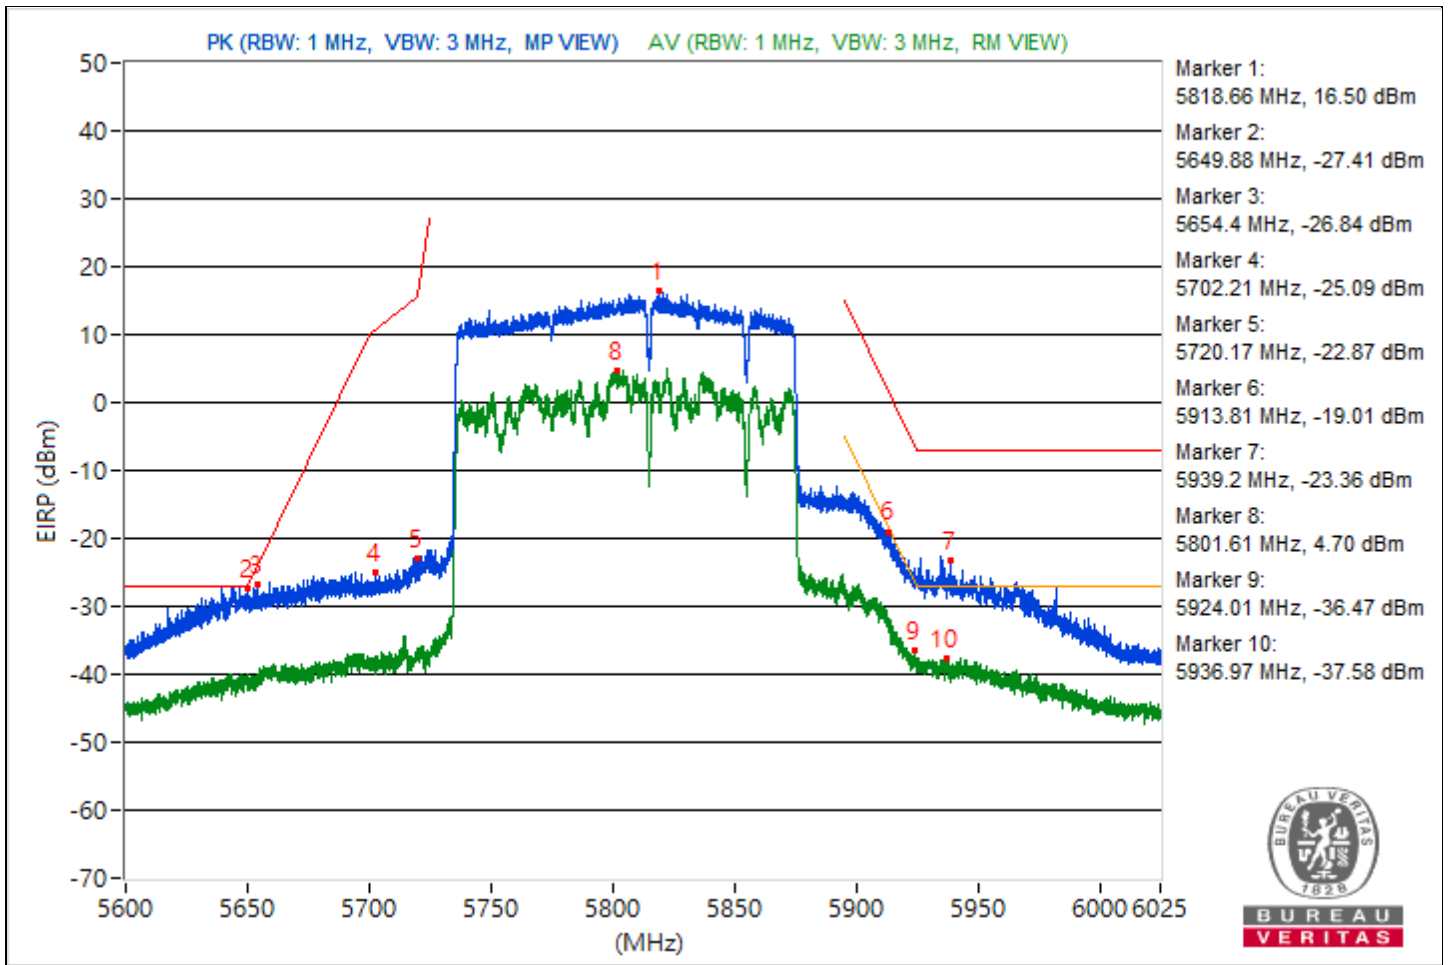

Mode B

1T

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	58.7 PK	74.0	-15.3	1.27 H	225	41.8	16.9
2	11690.00	48.4 AV	54.0	-5.6	1.27 H	225	31.5	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	58.4 PK	74.0	-15.6	2.20 V	310	41.5	16.9
2	11690.00	48.1 AV	54.0	-5.9	2.20 V	310	31.2	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.6 PK	74.0	-16.4	1.30 H	222	40.8	16.8
2	11730.00	48.2 AV	54.0	-5.8	1.30 H	222	31.4	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.3 PK	74.0	-16.7	2.13 V	310	40.5	16.8
2	11730.00	47.9 AV	54.0	-6.1	2.13 V	310	31.1	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.5 PK	74.0	-16.5	1.33 H	232	40.8	16.7
2	11770.00	47.9 AV	54.0	-6.1	1.33 H	232	31.2	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.2 PK	74.0	-16.8	2.25 V	315	40.5	16.7
2	11770.00	47.6 AV	54.0	-6.4	2.25 V	315	30.9	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.6 PK	74.0	-16.4	1.31 H	232	40.7	16.9
2	11690.00	48.2 AV	54.0	-5.8	1.31 H	232	31.3	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.3 PK	74.0	-16.7	2.32 V	335	40.4	16.9
2	11690.00	47.9 AV	54.0	-6.1	2.32 V	335	31.0	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.3 PK	74.0	-16.7	1.37 H	229	40.5	16.8
2	11730.00	48.0 AV	54.0	-6.0	1.37 H	229	31.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.0 PK	74.0	-17.0	2.45 V	338	40.2	16.8
2	11730.00	47.7 AV	54.0	-6.3	2.45 V	338	30.9	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.2 PK	74.0	-16.8	1.48 H	251	40.5	16.7
2	11770.00	47.8 AV	54.0	-6.2	1.48 H	251	31.1	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.9 PK	74.0	-17.1	2.55 V	330	40.2	16.7
2	11770.00	47.5 AV	54.0	-6.5	2.55 V	330	30.8	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	56.7 PK	74.0	-17.3	1.53 H	255	39.8	16.9
2	11670.00	48.0 AV	54.0	-6.0	1.53 H	255	31.1	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	56.4 PK	74.0	-17.6	2.65 V	335	39.5	16.9
2	11670.00	47.7 AV	54.0	-6.3	2.65 V	335	30.8	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	57.2 PK	74.0	-16.8	1.65 H	266	40.4	16.8
2	11750.00	47.9 AV	54.0	-6.1	1.65 H	266	31.1	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	56.9 PK	74.0	-17.1	2.60 V	320	40.1	16.8
2	11750.00	47.6 AV	54.0	-6.4	2.60 V	320	30.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	56.5 PK	74.0	-17.5	1.68 H	265	39.7	16.8
2	11710.00	47.9 AV	54.0	-6.1	1.68 H	265	31.1	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	56.2 PK	74.0	-17.8	2.61 V	321	39.4	16.8
2	11710.00	47.6 AV	54.0	-6.4	2.61 V	321	30.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	57.4 PK	74.0	-16.6	1.63 H	281	40.6	16.8
2	11630.00	47.6 AV	54.0	-6.4	1.63 H	281	30.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	57.1 PK	74.0	-16.9	2.61 V	320	40.3	16.8
2	11630.00	47.3 AV	54.0	-6.7	2.61 V	320	30.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.7 PK	74.0	-16.3	1.68 H	288	40.8	16.9
2	11690.00	47.7 AV	54.0	-6.3	1.68 H	288	30.8	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.4 PK	74.0	-16.6	2.66 V	322	40.5	16.9
2	11690.00	47.4 AV	54.0	-6.6	2.66 V	322	30.5	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.9 PK	74.0	-17.1	1.72 H	277	40.1	16.8
2	11730.00	47.5 AV	54.0	-6.5	1.72 H	277	30.7	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.6 PK	74.0	-26.4	2.58 V	320	30.8	16.8
2	11730.00	47.2 AV	54.0	-6.8	2.58 V	320	30.4	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.4 PK	74.0	-16.6	1.70 H	270	40.7	16.7
2	11770.00	47.7 AV	54.0	-6.3	1.70 H	270	31.0	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.1 PK	74.0	-16.9	2.55 V	325	40.4	16.7
2	11770.00	47.4 AV	54.0	-6.6	2.55 V	325	30.7	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.5 PK	74.0	-16.5	1.66 H	265	40.6	16.9
2	11690.00	47.7 AV	54.0	-6.3	1.66 H	265	30.8	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.2 PK	74.0	-16.8	2.50 V	320	40.3	16.9
2	11690.00	47.4 AV	54.0	-6.6	2.50 V	320	30.5	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.9 PK	74.0	-17.1	1.66 H	261	40.1	16.8
2	11730.00	47.6 AV	54.0	-6.4	1.66 H	261	30.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.6 PK	74.0	-17.4	2.42 V	318	39.8	16.8
2	11730.00	47.3 AV	54.0	-6.7	2.42 V	318	30.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.4 PK	74.0	-16.6	1.61 H	257	40.7	16.7
2	11770.00	47.4 AV	54.0	-6.6	1.61 H	257	30.7	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.1 PK	74.0	-16.9	2.50 V	320	40.4	16.7
2	11770.00	47.1 AV	54.0	-6.9	2.50 V	320	30.4	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.9 PK	74.0	-16.1	1.50 H	245	41.0	16.9
2	11690.00	48.0 AV	54.0	-6.0	1.55 H	251	31.1	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.6 PK	74.0	-16.4	2.45 V	325	40.7	16.9
2	11690.00	47.6 AV	54.0	-6.4	2.45 V	325	30.7	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.5 PK	74.0	-16.5	1.52 H	253	40.7	16.8
2	11730.00	47.8 AV	54.0	-6.2	1.52 H	253	31.0	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.2 PK	74.0	-16.8	2.48 V	328	40.4	16.8
2	11730.00	47.5 AV	54.0	-6.5	2.48 V	328	30.7	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.9 PK	74.0	-17.1	1.55 H	255	40.2	16.7
2	11770.00	47.4 AV	54.0	-6.6	1.55 H	255	30.7	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.6 PK	74.0	-17.4	2.55 V	331	39.9	16.7
2	11770.00	47.1 AV	54.0	-6.9	2.55 V	331	30.4	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.7 PK	74.0	-16.3	1.66 H	258	40.8	16.9
2	11690.00	48.0 AV	54.0	-6.0	2.66 H	258	31.1	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.4 PK	74.0	-16.6	2.56 V	336	40.5	16.9
2	11690.00	47.7 AV	54.0	-6.3	2.56 V	336	30.8	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.5 PK	74.0	-16.5	1.58 H	258	40.7	16.8
2	11730.00	48.0 AV	54.0	-6.0	1.58 H	258	31.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.2 PK	74.0	-16.8	2.51 V	333	40.4	16.8
2	11730.00	47.7 AV	54.0	-6.3	2.51 V	333	30.9	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.7 PK	74.0	-17.3	1.56 H	254	40.0	16.7
2	11770.00	47.3 AV	54.0	-6.7	1.56 H	254	30.6	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.4 PK	74.0	-17.6	2.50 V	330	39.7	16.7
2	11770.00	47.0 AV	54.0	-7.0	2.50 V	330	30.3	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	56.9 PK	74.0	-17.1	1.66 H	258	40.0	16.9
2	11690.00	47.9 AV	54.0	-6.1	1.66 H	258	31.0	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	56.6 PK	74.0	-17.4	2.58 V	345	39.7	16.9
2	11690.00	47.6 AV	54.0	-6.4	2.58 V	345	30.7	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.5 PK	74.0	-17.5	1.70 H	260	39.7	16.8
2	11730.00	47.6 AV	54.0	-6.4	1.70 H	260	30.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.2 PK	74.0	-17.8	2.55 V	321	39.4	16.8
2	11730.00	47.3 AV	54.0	-6.7	2.55 V	321	30.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.2 PK	74.0	-17.8	1.65 H	255	39.5	16.7
2	11770.00	47.4 AV	54.0	-6.6	1.65 H	255	30.7	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	55.9 PK	74.0	-18.1	2.63 V	325	39.2	16.7
2	11770.00	47.1 AV	54.0	-6.9	2.63 V	325	30.4	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	57.0 PK	74.0	-17.0	1.66 H	257	40.2	16.8
2	11710.00	47.6 AV	54.0	-6.4	1.66 H	257	30.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	56.7 PK	74.0	-17.3	2.61 V	332	39.9	16.8
2	11710.00	47.3 AV	54.0	-6.7	2.61 V	332	30.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	56.6 PK	74.0	-17.4	1.66 H	221	39.8	16.8
2	11630.00	47.5 AV	54.0	-6.5	1.66 H	221	30.7	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	56.3 PK	74.0	-17.7	2.58 V	327	39.5	16.8
2	11630.00	47.2 AV	54.0	-6.8	2.58 V	327	30.4	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	57.0 PK	74.0	-17.0	1.70 H	265	40.2	16.8
2	11630.00	47.6 AV	54.0	-6.4	1.70 H	265	30.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.7 PK	74.0	-26.3	2.60 V	330	30.9	16.8
2	11630.00	47.3 AV	54.0	-6.7	2.60 V	330	30.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

Mode B

2T

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	58.8 PK	74.0	-15.2	1.25 H	223	41.9	16.9
2	11690.00	48.5 AV	54.0	-5.5	1.25 H	223	31.6	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	58.5 PK	74.0	-15.5	2.18 V	303	41.6	16.9
2	11690.00	48.2 AV	54.0	-5.8	2.18 V	303	31.3	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.7 PK	74.0	-16.3	1.28 H	220	40.9	16.8
2	11730.00	48.3 AV	54.0	-5.7	1.28 H	220	31.5	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.4 PK	74.0	-16.6	2.15 V	305	40.6	16.8
2	11730.00	48.0 AV	54.0	-6.0	2.15 V	305	31.2	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.6 PK	74.0	-16.4	1.31 H	229	40.9	16.7
2	11770.00	48.0 AV	54.0	-6.0	1.31 H	229	31.3	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.3 PK	74.0	-16.7	2.23 V	316	40.6	16.7
2	11770.00	47.7 AV	54.0	-6.3	2.23 V	316	31.0	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.7 PK	74.0	-16.3	1.35 H	237	40.8	16.9
2	11690.00	48.3 AV	54.0	-5.7	1.35 H	237	31.4	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.4 PK	74.0	-16.6	2.38 V	331	40.5	16.9
2	11690.00	48.0 AV	54.0	-6.0	2.38 V	331	31.1	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.4 PK	74.0	-16.6	1.39 H	231	40.6	16.8
2	11730.00	48.1 AV	54.0	-5.9	1.39 H	231	31.3	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.1 PK	74.0	-16.9	2.43 V	335	40.3	16.8
2	11730.00	47.8 AV	54.0	-6.2	2.43 V	335	31.0	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.3 PK	74.0	-16.7	1.45 H	243	40.6	16.7
2	11770.00	47.9 AV	54.0	-6.1	1.45 H	243	31.2	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.0 PK	74.0	-17.0	2.51 V	328	40.3	16.7
2	11770.00	47.6 AV	54.0	-6.4	2.51 V	328	30.9	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	56.8 PK	74.0	-17.2	1.51 H	252	39.9	16.9
2	11670.00	48.1 AV	54.0	-5.9	1.51 H	252	31.2	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	56.5 PK	74.0	-17.5	2.62 V	333	39.6	16.9
2	11670.00	47.8 AV	54.0	-6.2	2.62 V	333	30.9	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	57.3 PK	74.0	-16.7	1.62 H	265	40.5	16.8
2	11750.00	48.0 AV	54.0	-6.0	1.62 H	265	31.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	57.0 PK	74.0	-17.0	2.58 V	316	40.2	16.8
2	11750.00	47.7 AV	54.0	-6.3	2.58 V	316	30.9	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	56.6 PK	74.0	-17.4	1.65 H	263	39.8	16.8
2	11710.00	48.0 AV	54.0	-6.0	1.65 H	263	31.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	56.3 PK	74.0	-17.7	2.67 V	320	39.5	16.8
2	11710.00	47.7 AV	54.0	-6.3	2.67 V	320	30.9	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	57.5 PK	74.0	-16.5	1.68 H	277	40.7	16.8
2	11630.00	47.7 AV	54.0	-6.3	1.68 H	277	30.9	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	57.2 PK	74.0	-16.8	2.63 V	318	40.4	16.8
2	11630.00	47.4 AV	54.0	-6.6	2.63 V	318	30.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.8 PK	74.0	-16.2	1.70 H	280	40.9	16.9
2	11690.00	47.8 AV	54.0	-6.2	1.70 H	280	30.9	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.5 PK	74.0	-16.5	2.65 V	321	40.6	16.9
2	11690.00	47.5 AV	54.0	-6.5	2.65 V	321	30.6	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.0 PK	74.0	-17.0	1.73 H	275	40.2	16.8
2	11730.00	47.6 AV	54.0	-6.4	1.73 H	275	30.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.7 PK	74.0	-17.3	2.57 V	318	39.9	16.8
2	11730.00	47.3 AV	54.0	-6.7	2.57 V	318	30.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.5 PK	74.0	-16.5	1.69 H	268	40.8	16.7
2	11770.00	47.8 AV	54.0	-6.2	1.69 H	268	31.1	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.2 PK	74.0	-16.8	2.51 V	320	40.5	16.7
2	11770.00	47.5 AV	54.0	-6.5	2.51 V	320	30.8	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.6 PK	74.0	-16.4	1.67 H	262	40.7	16.9
2	11690.00	47.8 AV	54.0	-6.2	1.67 H	262	30.9	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.3 PK	74.0	-16.7	2.48 V	318	40.4	16.9
2	11690.00	47.5 AV	54.0	-6.5	2.48 V	318	30.6	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.0 PK	74.0	-17.0	1.65 H	260	40.2	16.8
2	11730.00	47.7 AV	54.0	-6.3	1.65 H	260	30.9	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.7 PK	74.0	-17.3	2.41 V	315	39.9	16.8
2	11730.00	47.4 AV	54.0	-6.6	2.41 V	315	30.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.5 PK	74.0	-16.5	1.60 H	255	40.8	16.7
2	11770.00	47.5 AV	54.0	-6.5	1.60 H	255	30.8	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.2 PK	74.0	-16.8	2.45 V	318	40.5	16.7
2	11770.00	47.2 AV	54.0	-6.8	2.45 V	318	30.5	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	58.0 PK	74.0	-16.0	1.55 H	251	41.1	16.9
2	11690.00	48.0 AV	54.0	-6.0	1.55 H	251	31.1	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.7 PK	74.0	-16.3	2.43 V	320	40.8	16.9
2	11690.00	47.7 AV	54.0	-6.3	2.43 V	320	30.8	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.6 PK	74.0	-16.4	1.51 H	252	40.8	16.8
2	11730.00	47.9 AV	54.0	-6.1	1.51 H	252	31.1	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.3 PK	74.0	-16.7	2.45 V	325	40.5	16.8
2	11730.00	47.6 AV	54.0	-6.4	2.45 V	325	30.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	57.0 PK	74.0	-17.0	1.53 H	253	40.3	16.7
2	11770.00	47.5 AV	54.0	-6.5	1.53 H	253	30.8	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.7 PK	74.0	-17.3	2.51 V	330	40.0	16.7
2	11770.00	47.2 AV	54.0	-6.8	2.51 V	330	30.5	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.8 PK	74.0	-16.2	1.00 H	259	40.9	16.9
2	11690.00	48.1 AV	54.0	-5.9	1.00 H	259	31.2	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.5 PK	74.0	-16.5	2.55 V	335	40.6	16.9
2	11690.00	47.8 AV	54.0	-6.2	2.55 V	335	30.9	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.6 PK	74.0	-16.4	1.57 H	257	40.8	16.8
2	11730.00	48.1 AV	54.0	-5.9	1.57 H	257	31.3	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	57.3 PK	74.0	-16.7	2.58 V	331	40.5	16.8
2	11730.00	47.8 AV	54.0	-6.2	2.58 V	331	31.0	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.8 PK	74.0	-17.2	1.55 H	253	40.1	16.7
2	11770.00	47.4 AV	54.0	-6.6	1.55 H	253	30.7	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.5 PK	74.0	-17.5	2.55 V	335	39.8	16.7
2	11770.00	47.1 AV	54.0	-6.9	2.55 V	335	30.4	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	57.0 PK	74.0	-17.0	1.65 H	257	40.1	16.9
2	11690.00	48.0 AV	54.0	-6.0	1.65 H	257	31.1	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	56.7 PK	74.0	-17.3	2.61 V	341	39.8	16.9
2	11690.00	47.7 AV	54.0	-6.3	2.61 V	341	30.8	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.6 PK	74.0	-17.4	1.68 H	258	39.8	16.8
2	11730.00	47.7 AV	54.0	-6.3	1.68 H	258	30.9	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	56.3 PK	74.0	-17.7	2.57 V	322	39.5	16.8
2	11730.00	47.4 AV	54.0	-6.6	2.57 V	322	30.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.3 PK	74.0	-17.7	1.63 H	253	39.6	16.7
2	11770.00	47.5 AV	54.0	-6.5	1.63 H	253	30.8	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	56.0 PK	74.0	-18.0	2.62 V	328	39.3	16.7
2	11770.00	47.2 AV	54.0	-6.8	2.62 V	328	30.5	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	57.1 PK	74.0	-16.9	1.65 H	256	40.3	16.8
2	11710.00	47.7 AV	54.0	-6.3	1.65 H	256	30.9	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	56.8 PK	74.0	-17.2	2.65 V	331	40.0	16.8
2	11710.00	47.4 AV	54.0	-6.6	2.65 V	331	30.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	57.0 PK	74.0	-17.0	1.66 H	258	40.2	16.8
2	11630.00	47.6 AV	54.0	-6.4	1.66 H	258	30.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	56.4 PK	74.0	-17.6	2.59 V	328	39.6	16.8
2	11630.00	47.3 AV	54.0	-6.7	2.59 V	328	30.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	57.1 PK	74.0	-16.9	1.68 H	260	40.3	16.8
2	11630.00	47.7 AV	54.0	-6.3	1.68 H	260	30.9	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	56.8 PK	74.0	-17.2	2.57 V	325	40.0	16.8
2	11630.00	47.4 AV	54.0	-6.6	2.57 V	325	30.6	16.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

Plot of Other Emission

Mode B

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

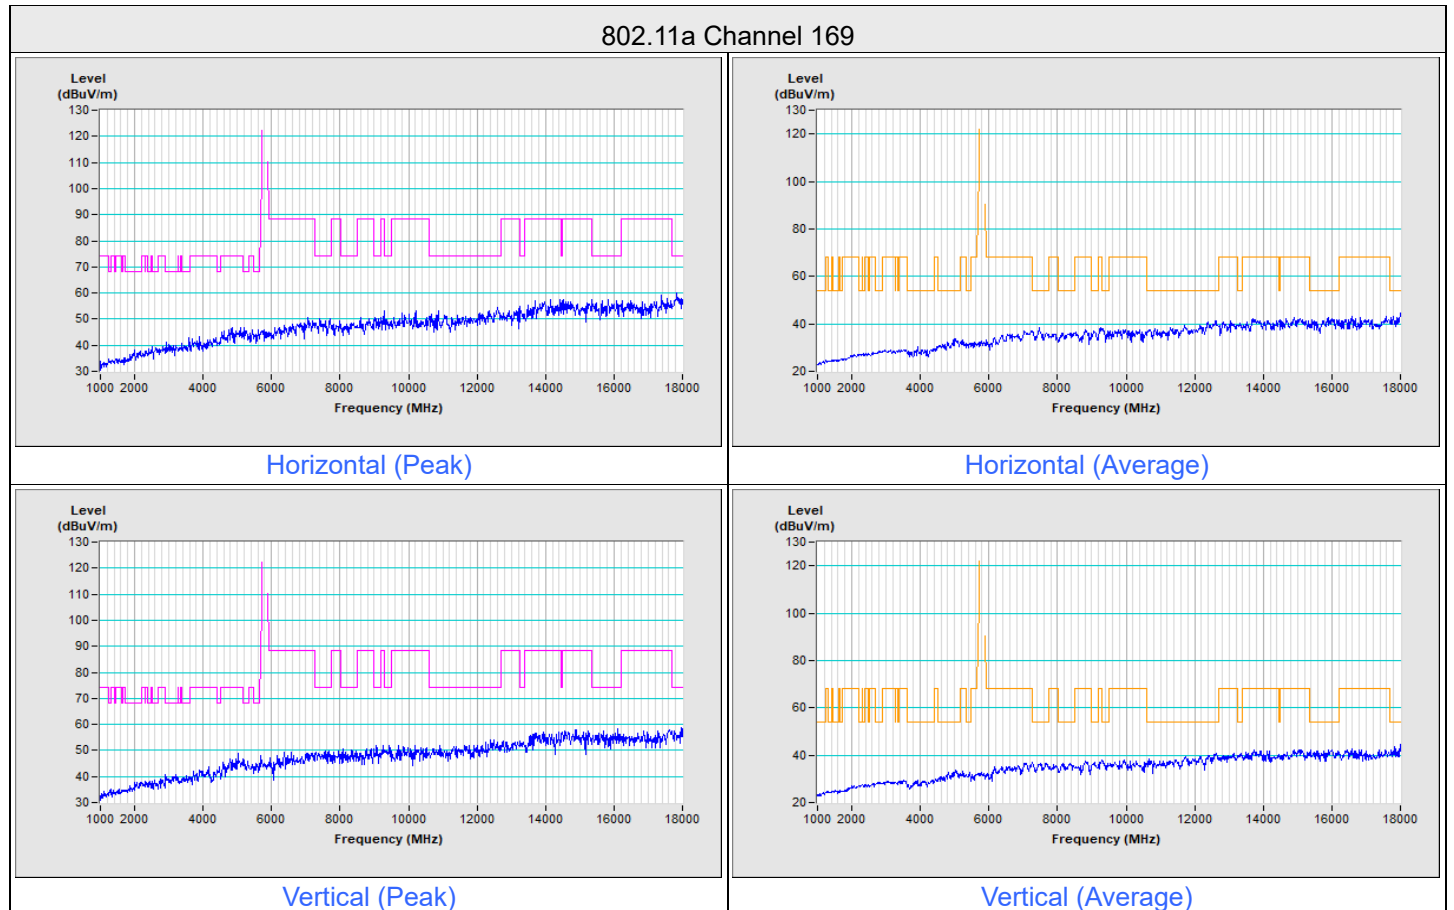


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT20) Channel 169

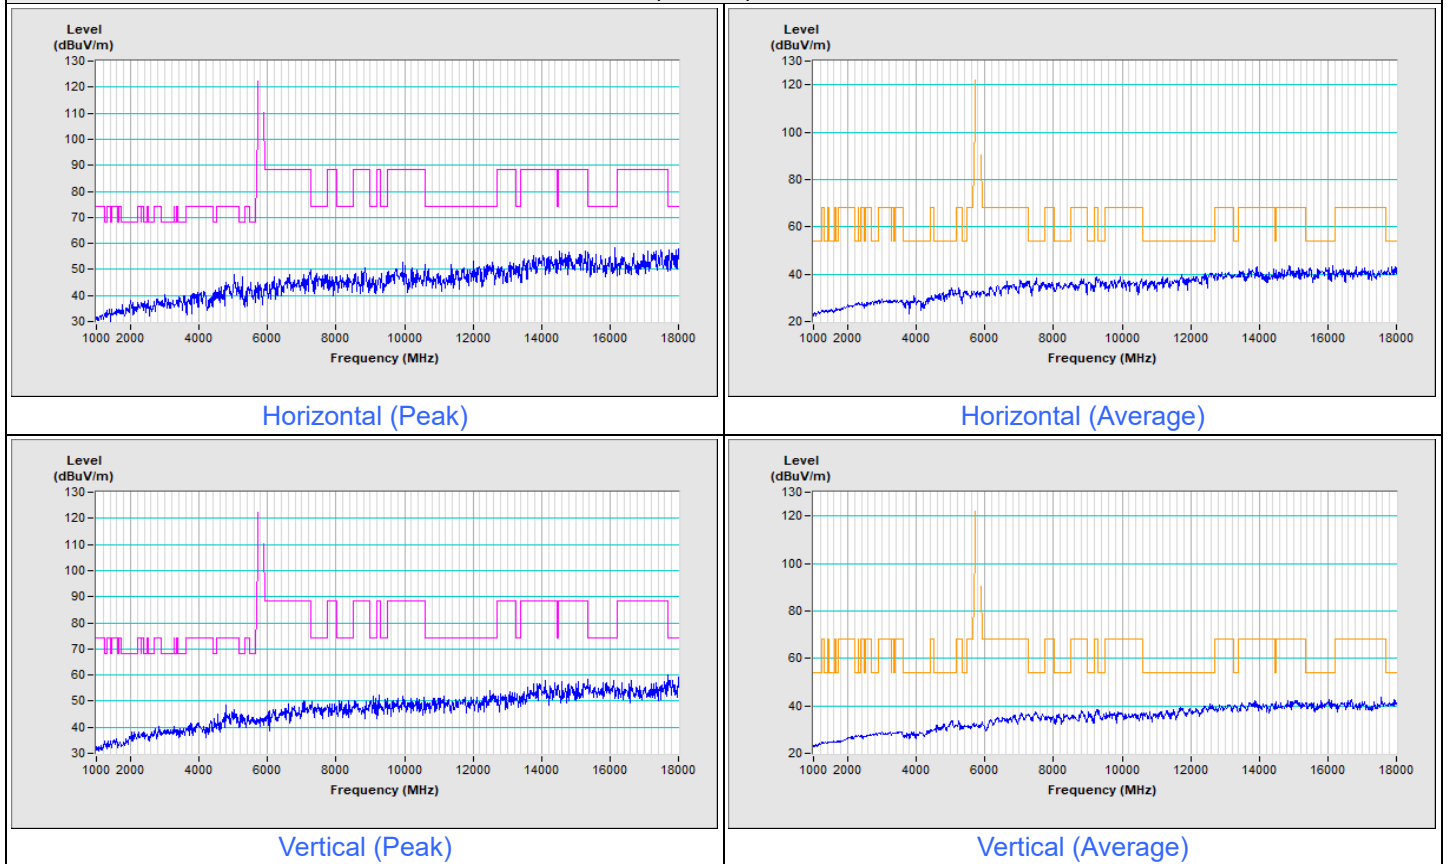


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT40) Channel 167

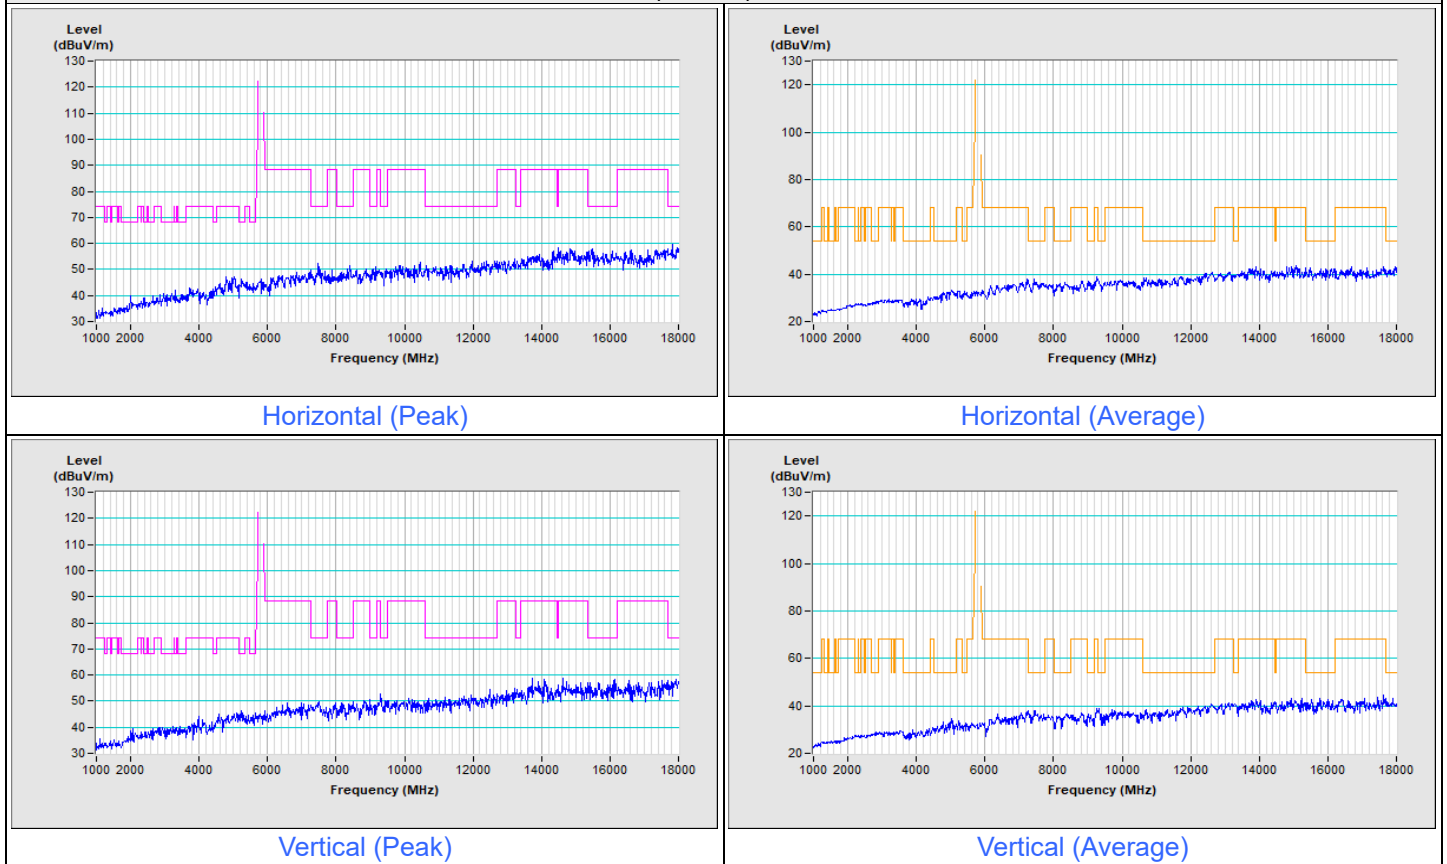


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT80) Channel 171

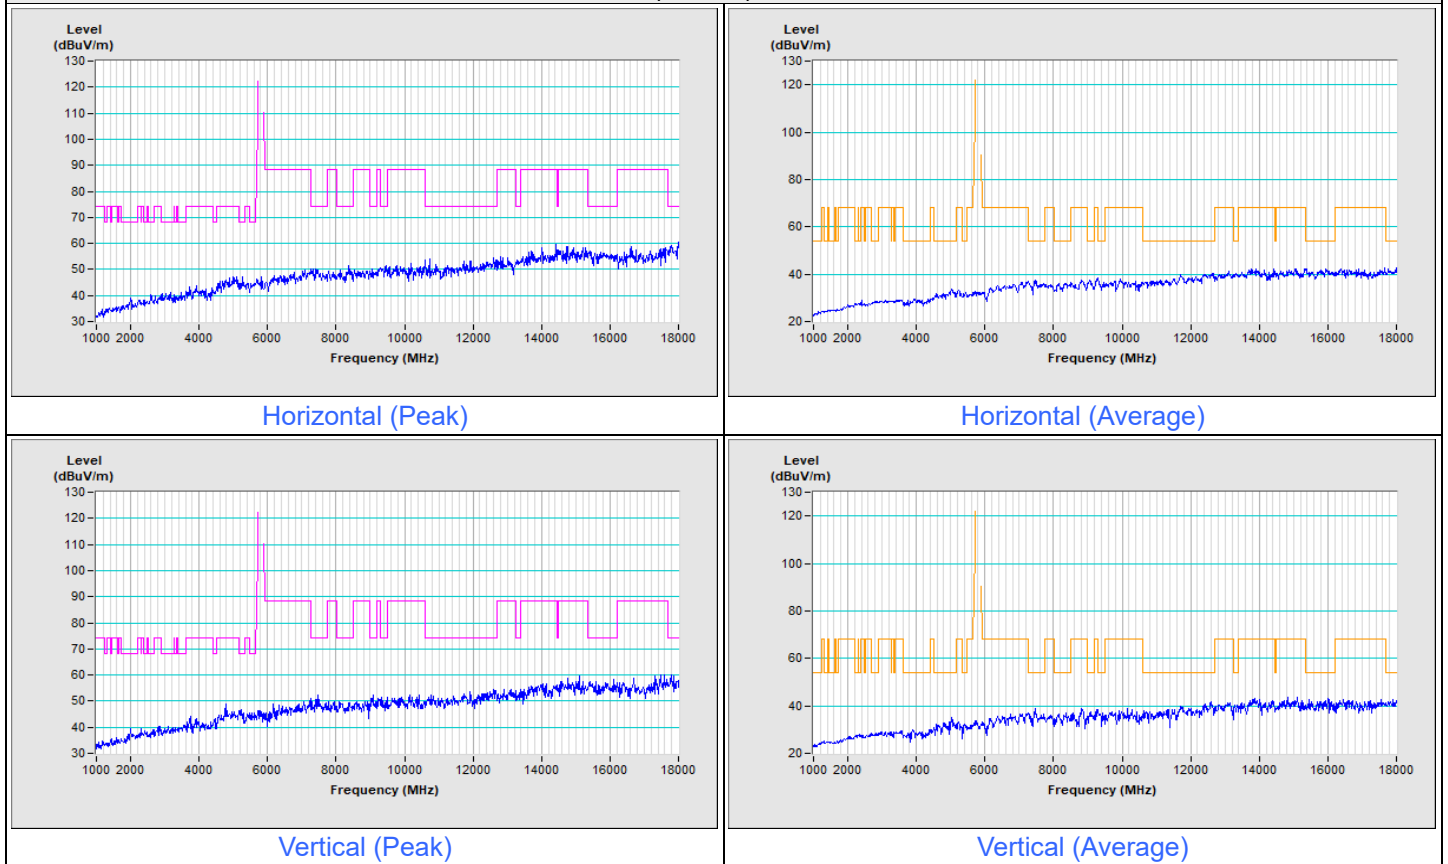


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT160) Channel 163

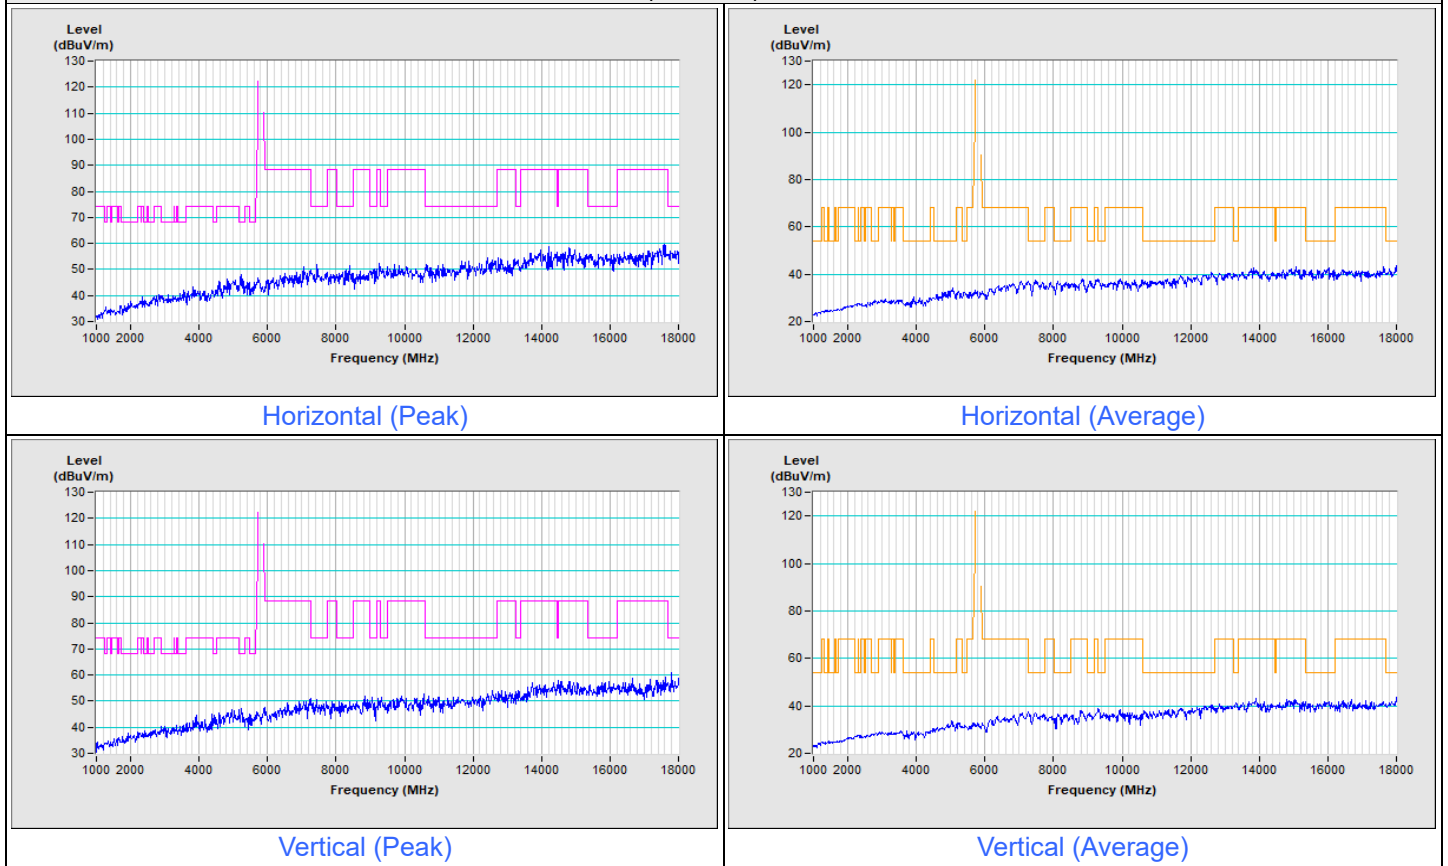

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---