



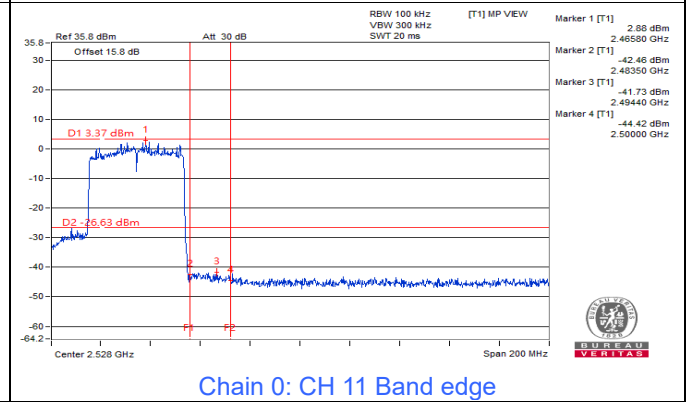
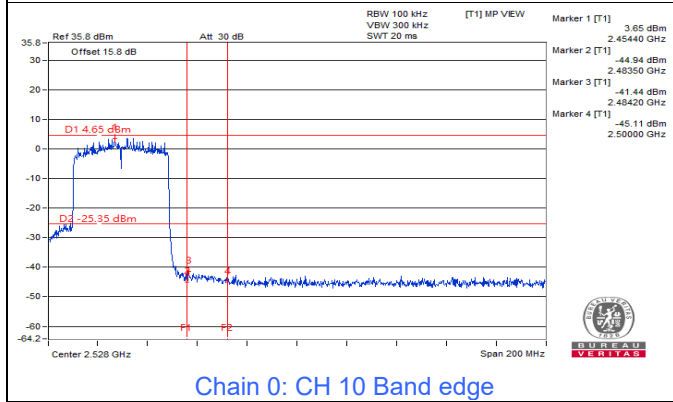
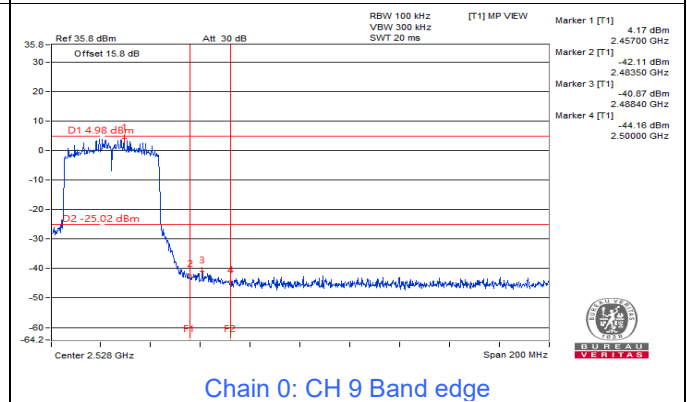
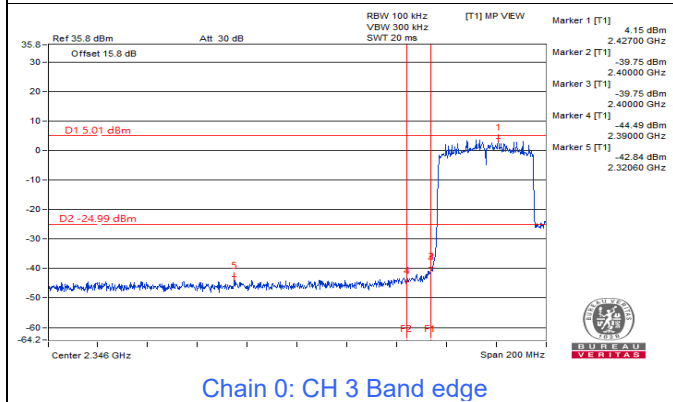
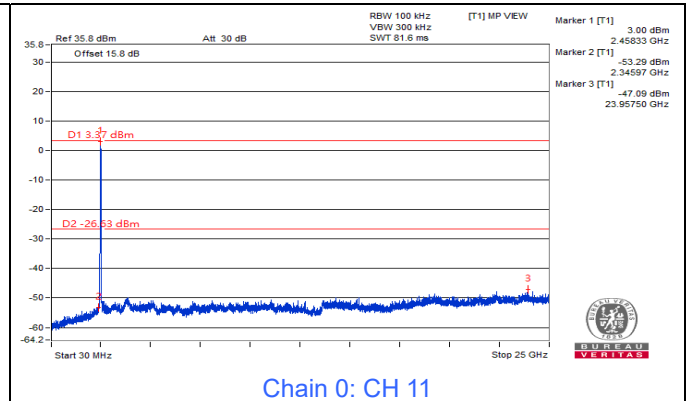
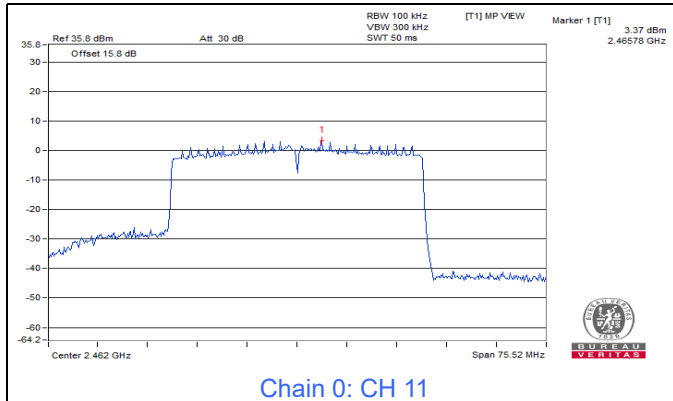
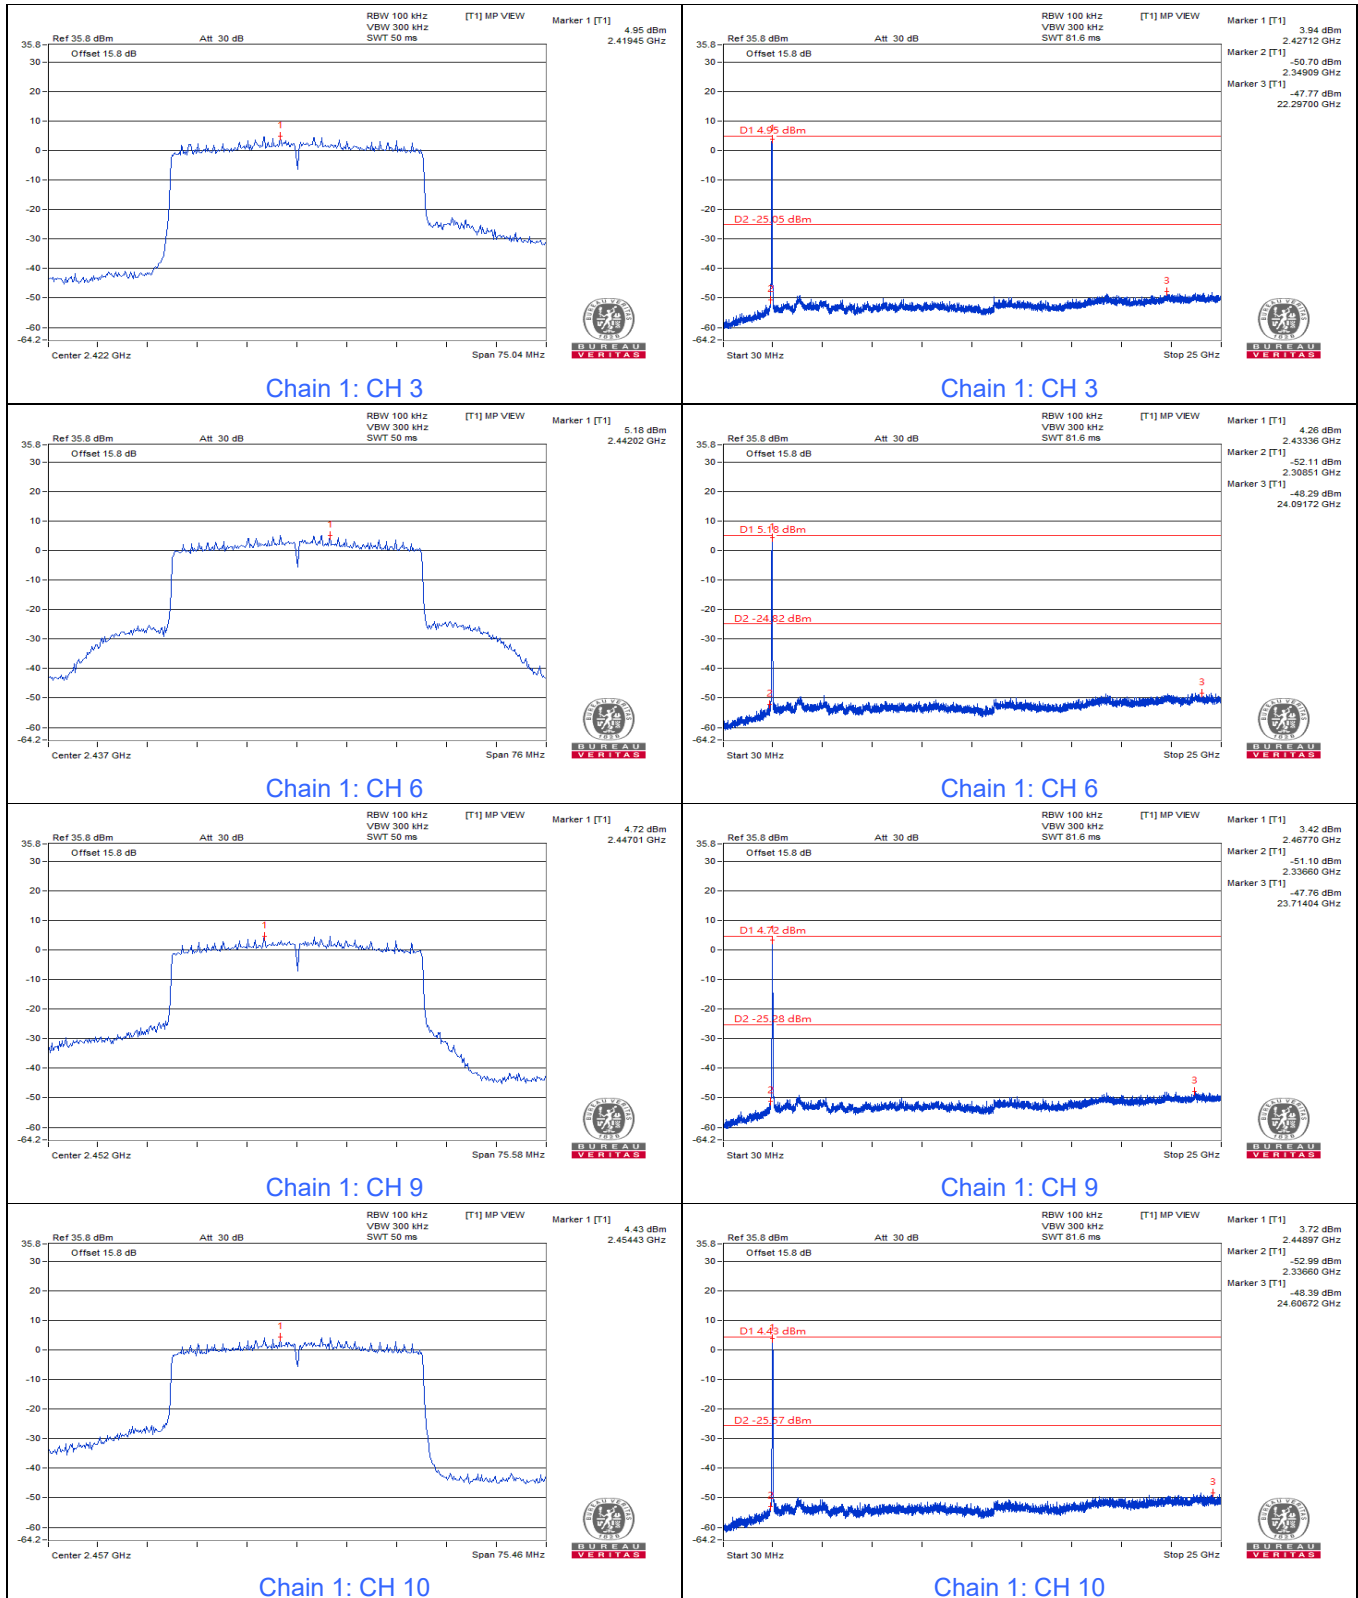
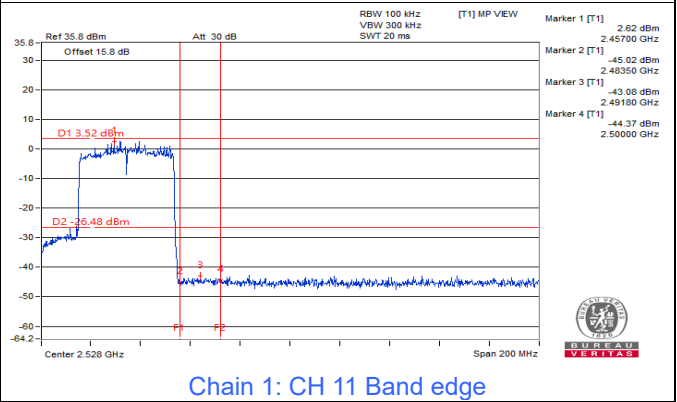
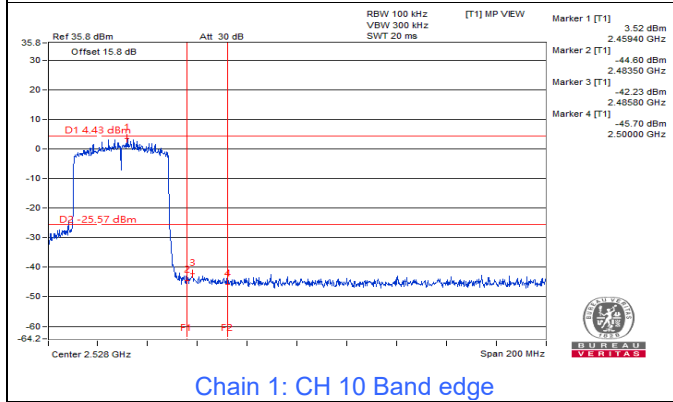
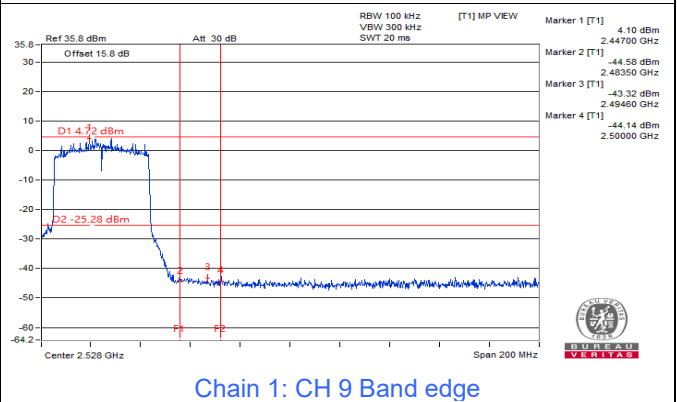







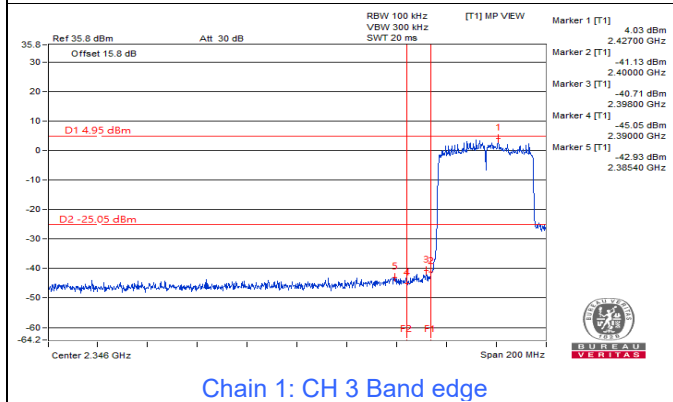









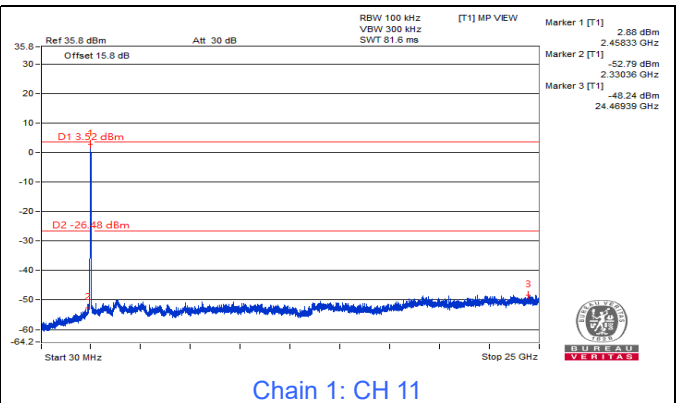







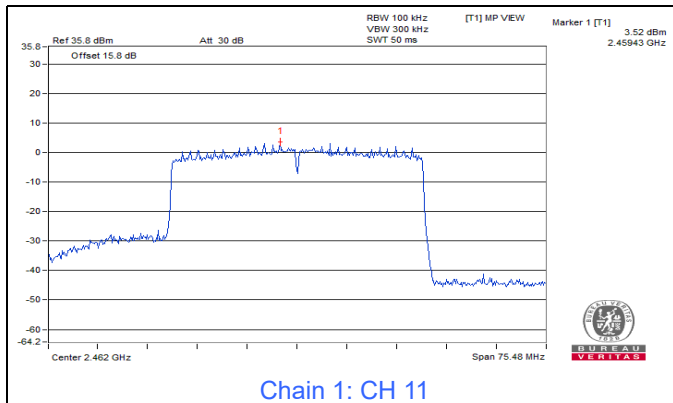


802.11be (EHT20) 26-tone RU

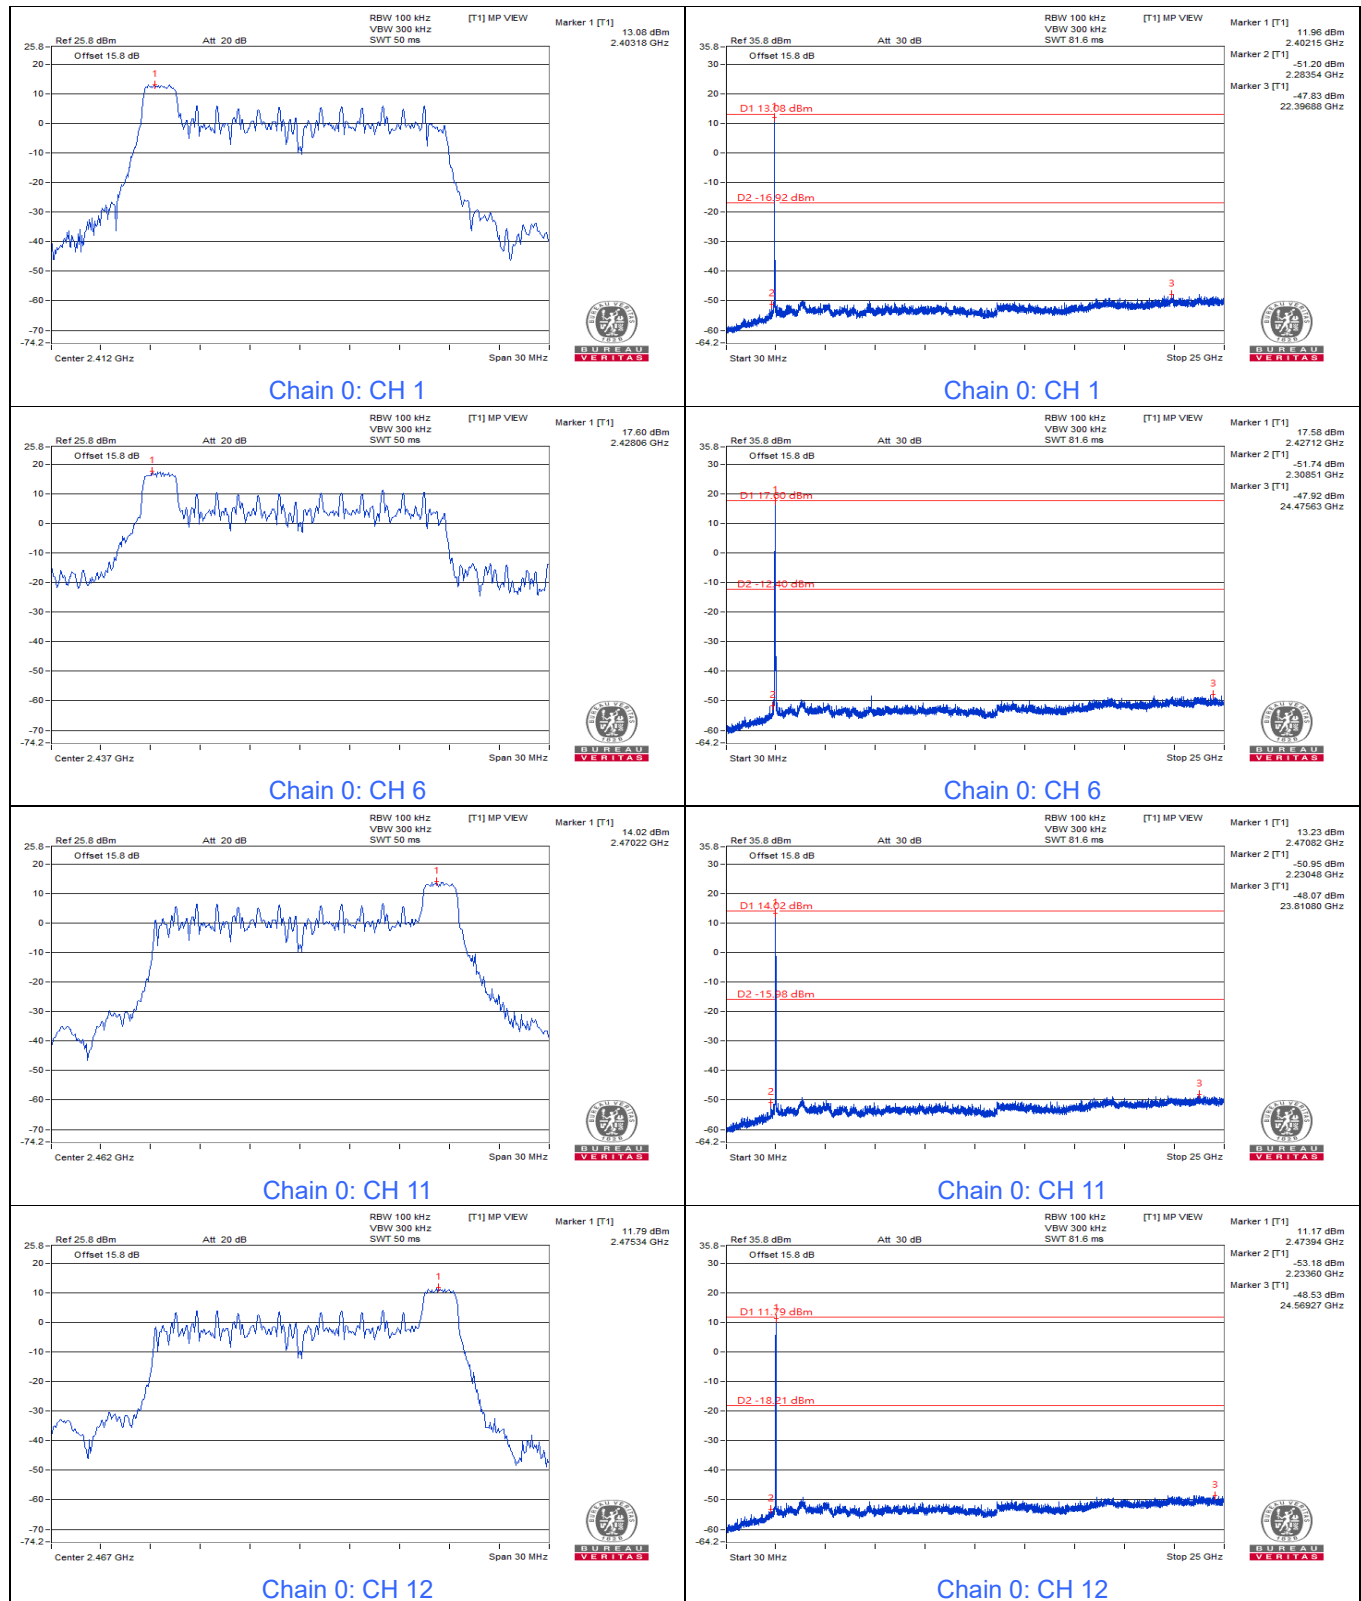

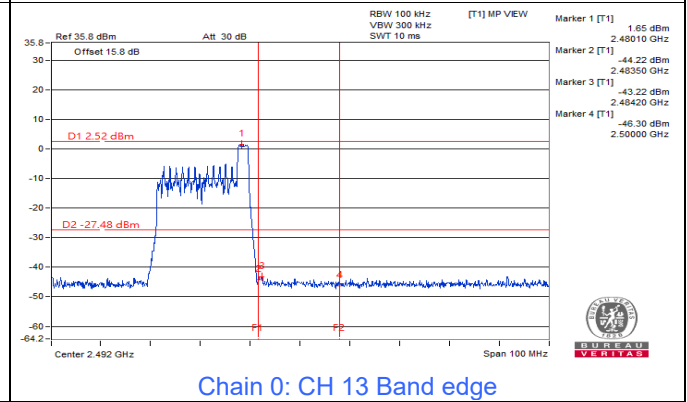
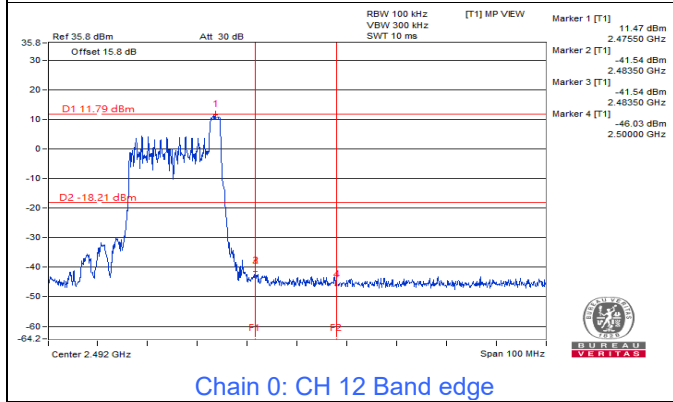
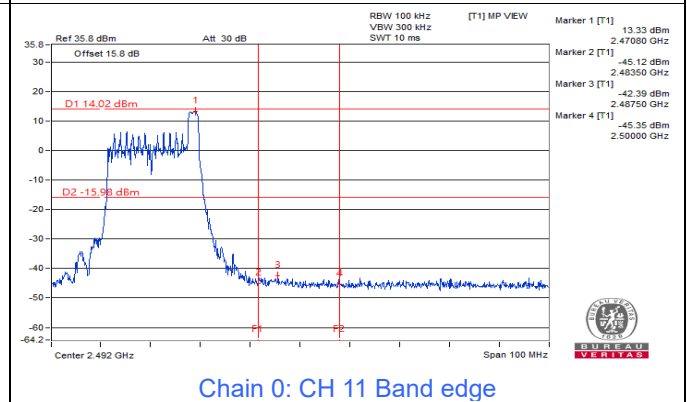
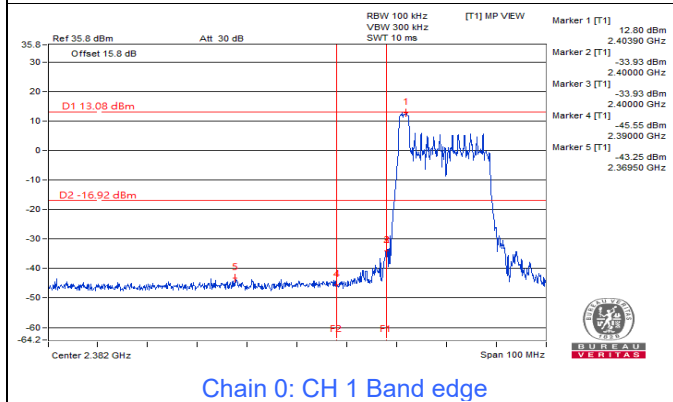
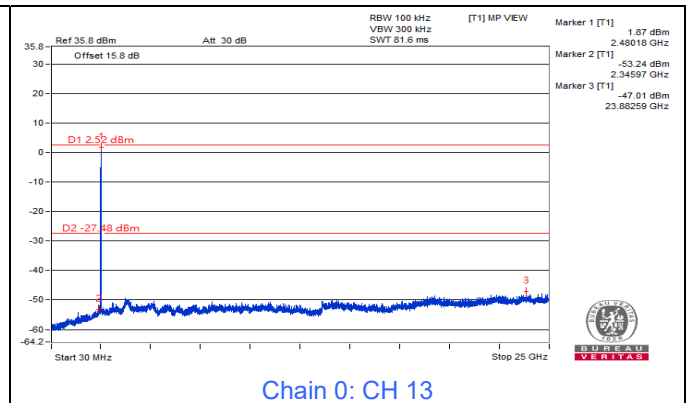
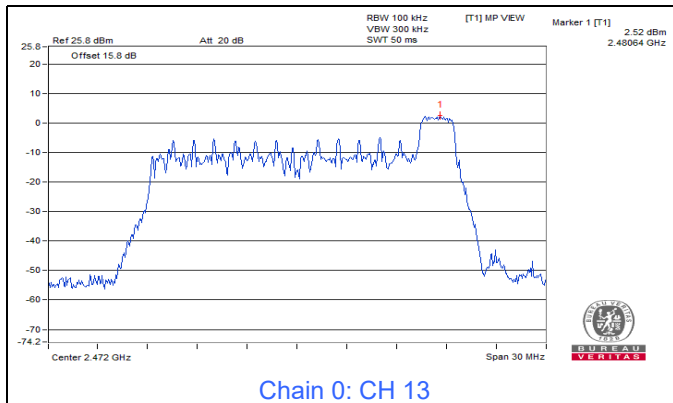


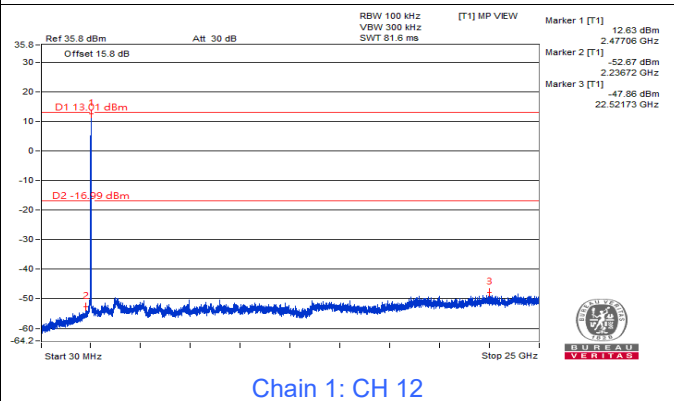
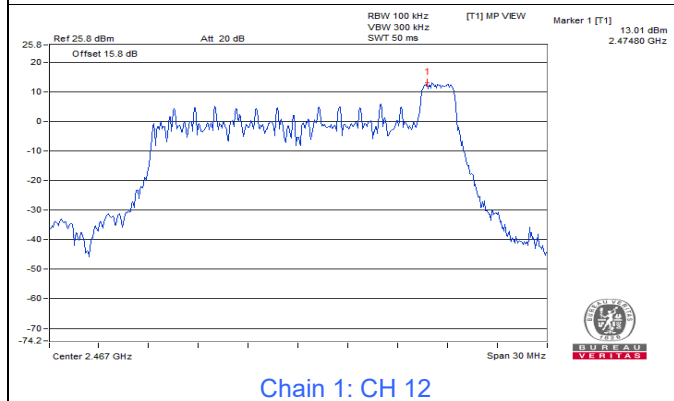
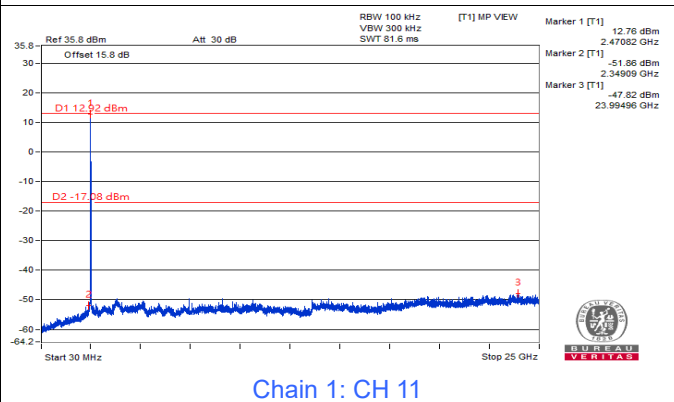
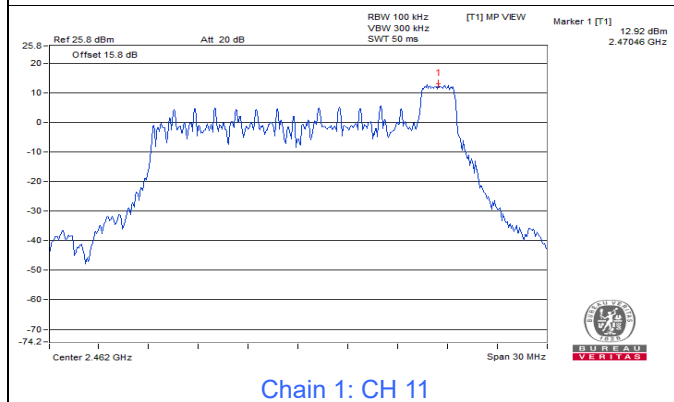
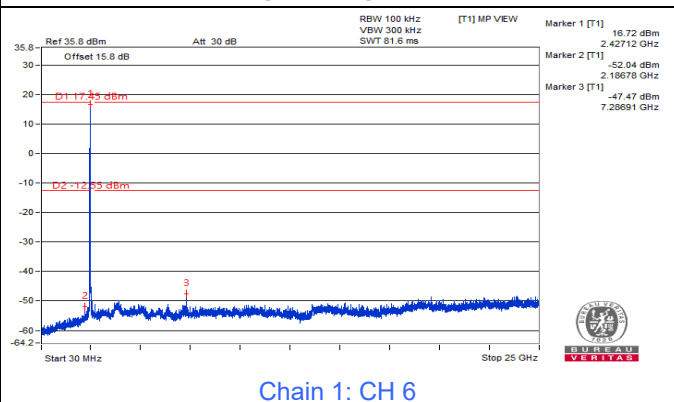
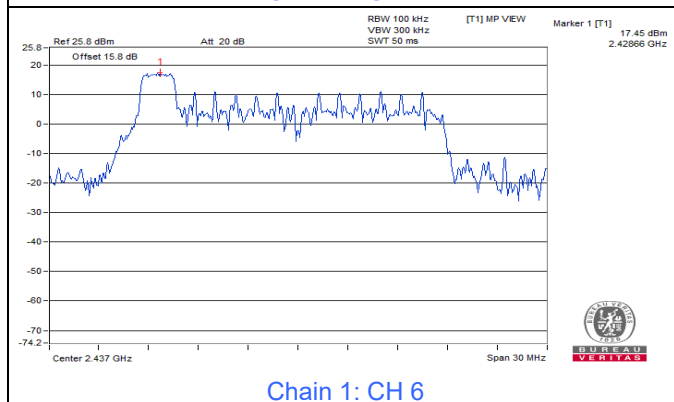
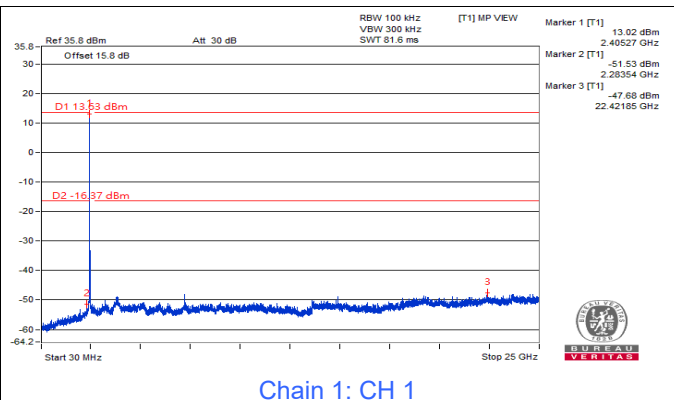
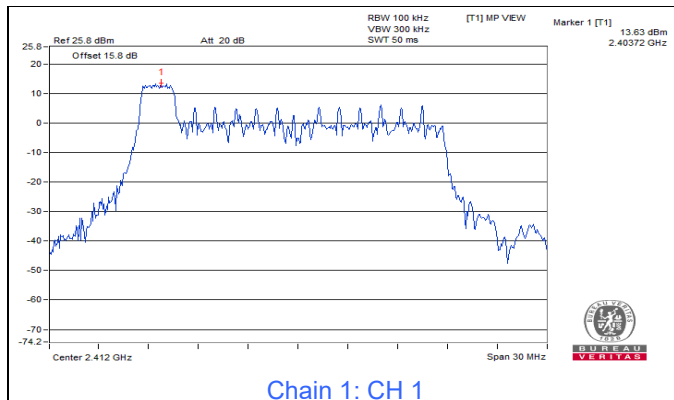


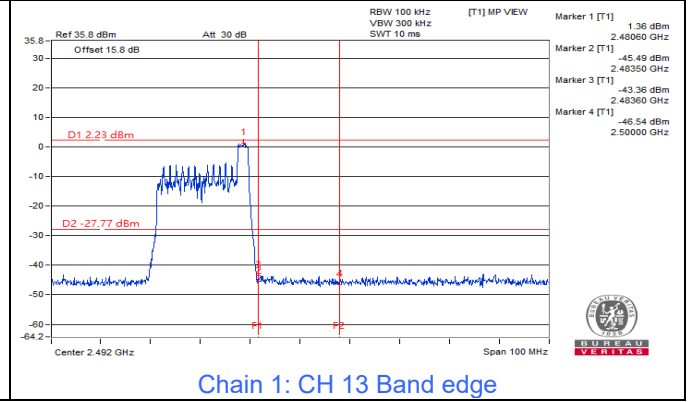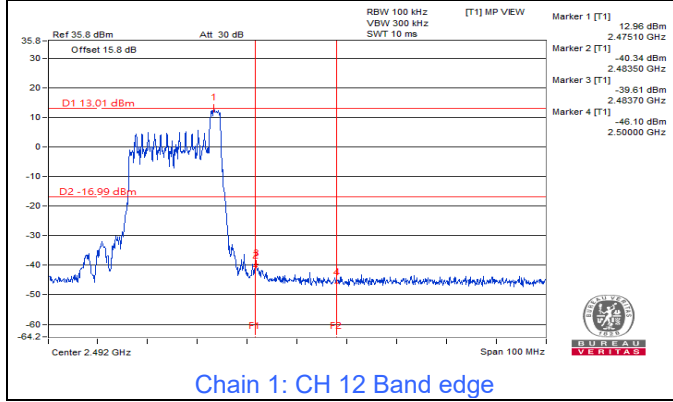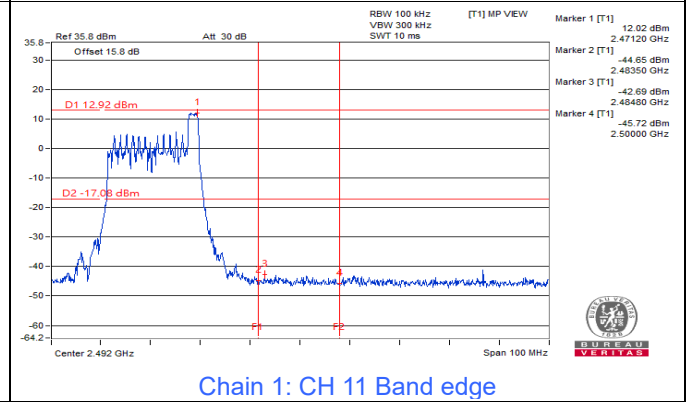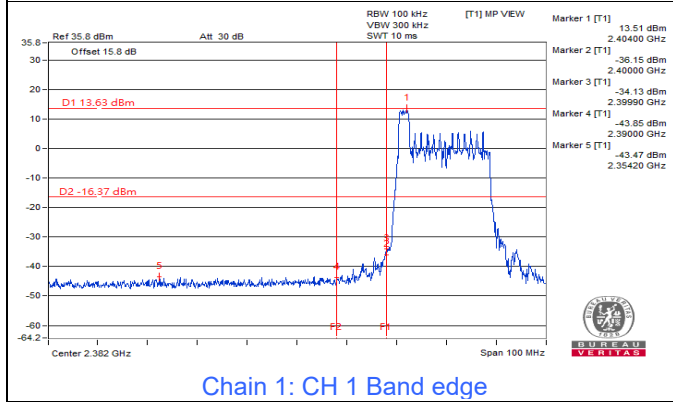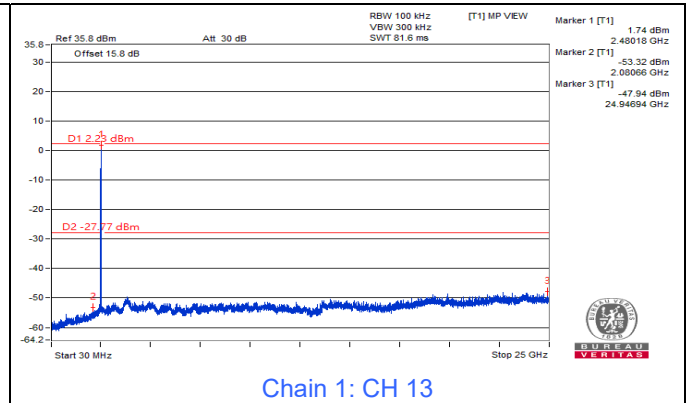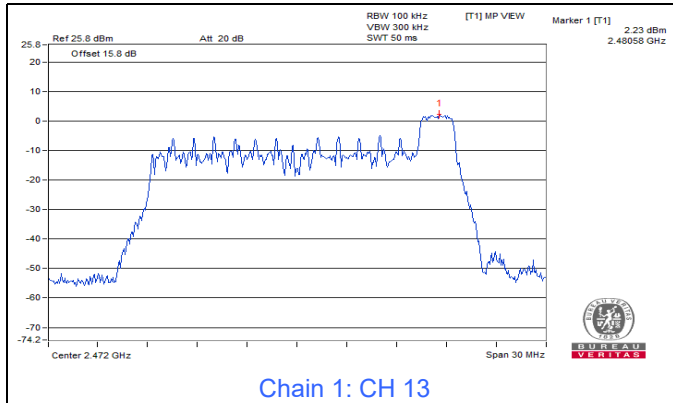


802.11be (EHT20) 52-tone RU




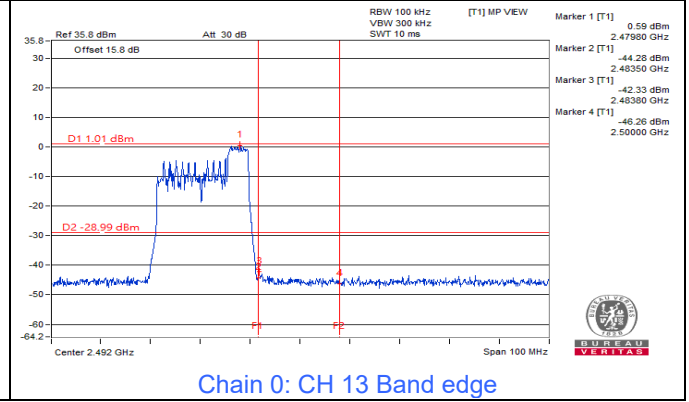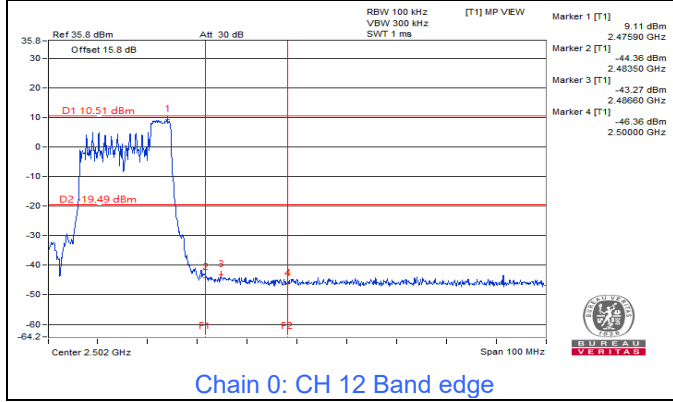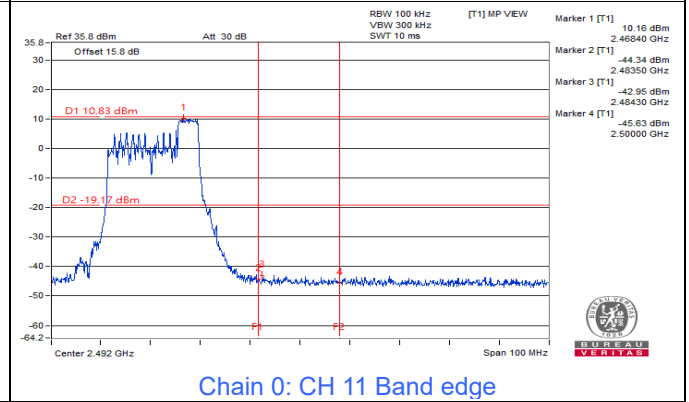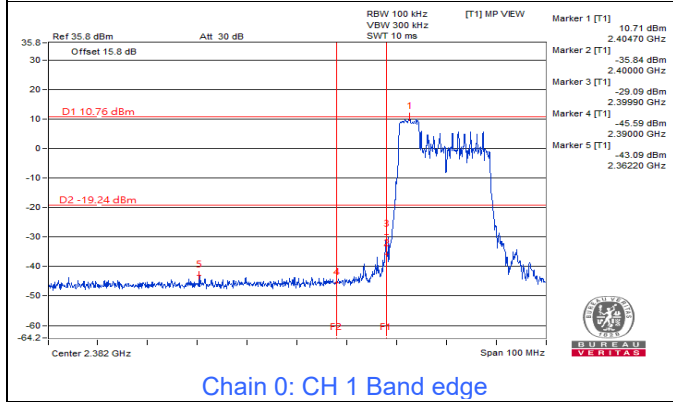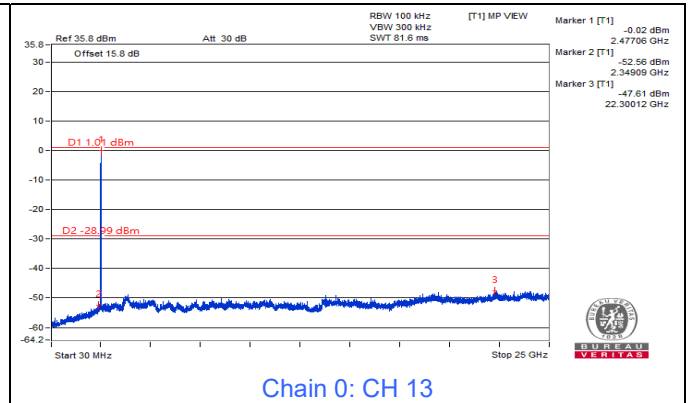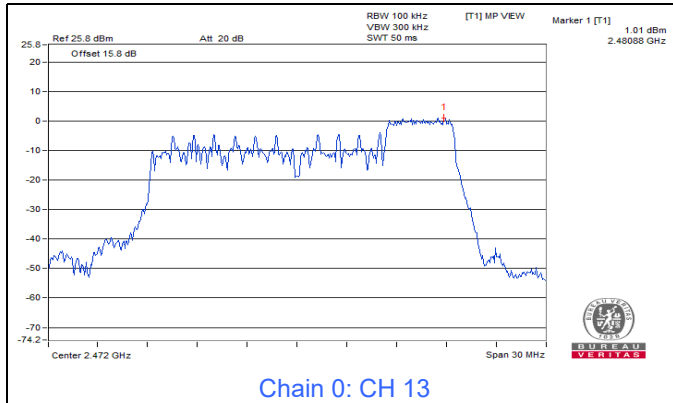

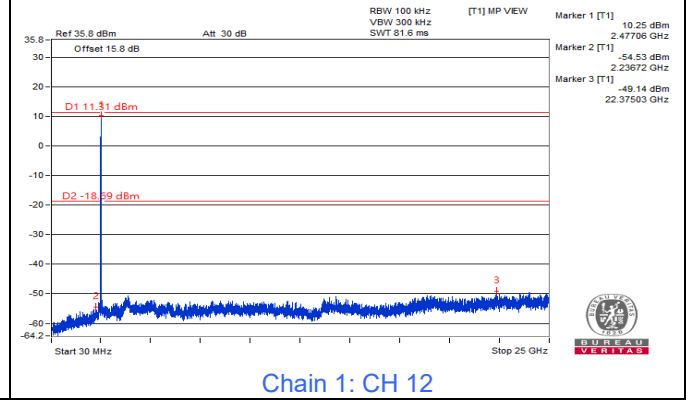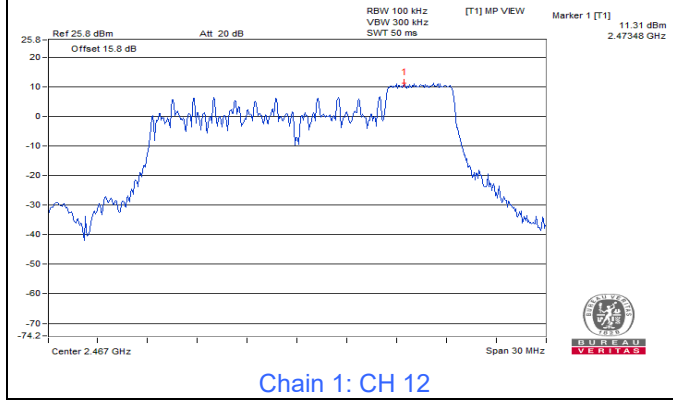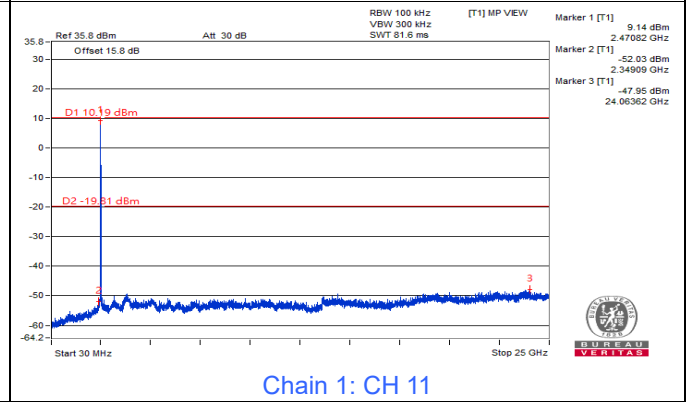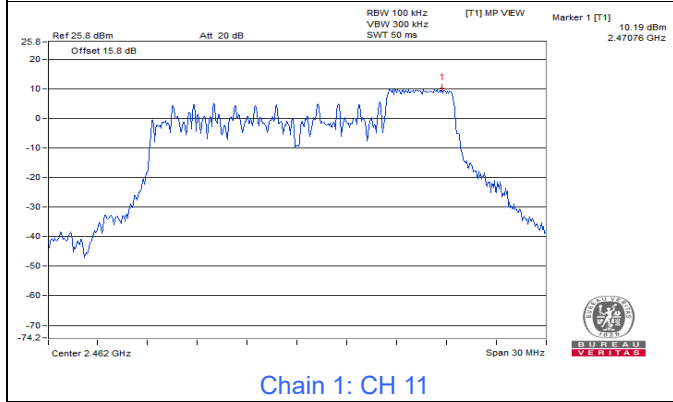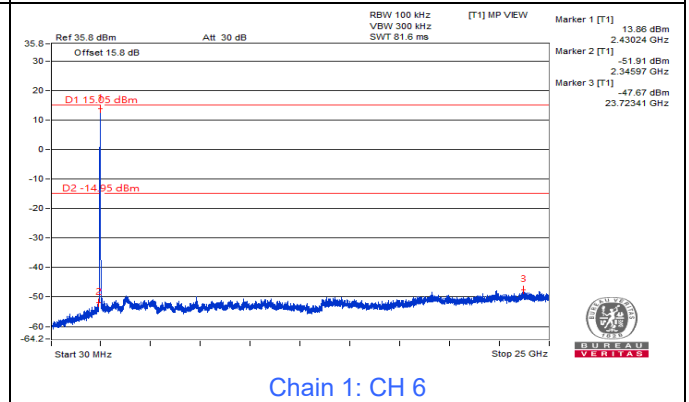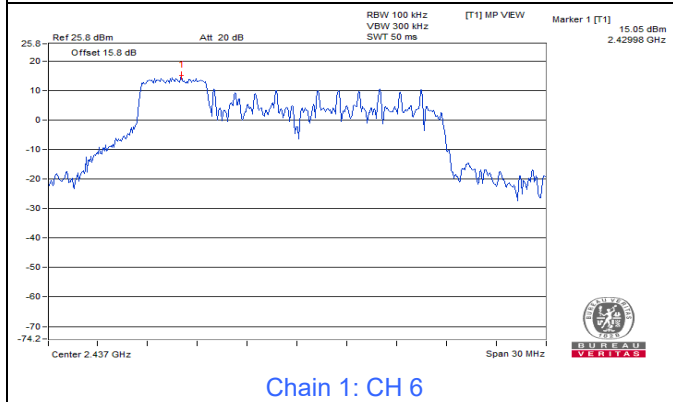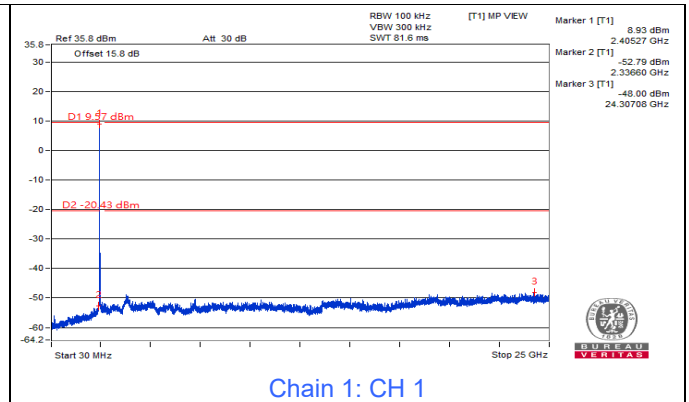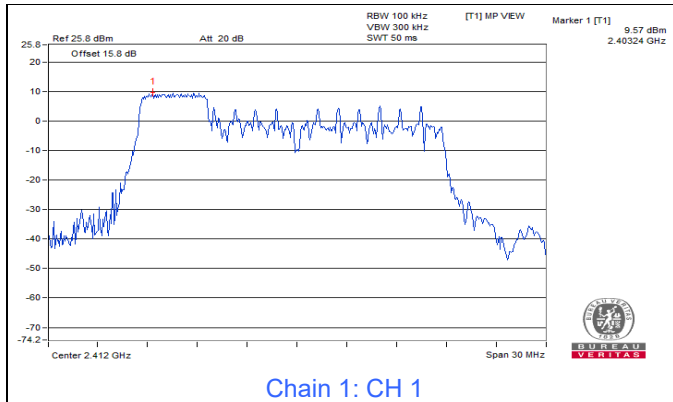


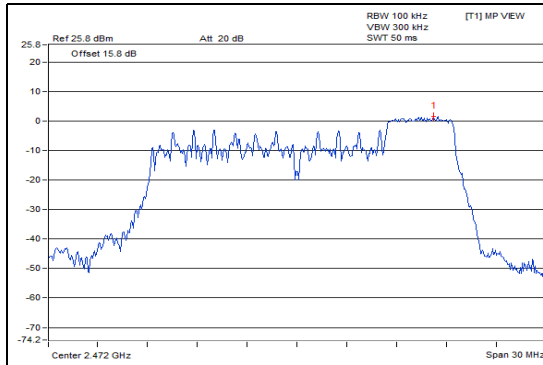


Chain 1: CH 13

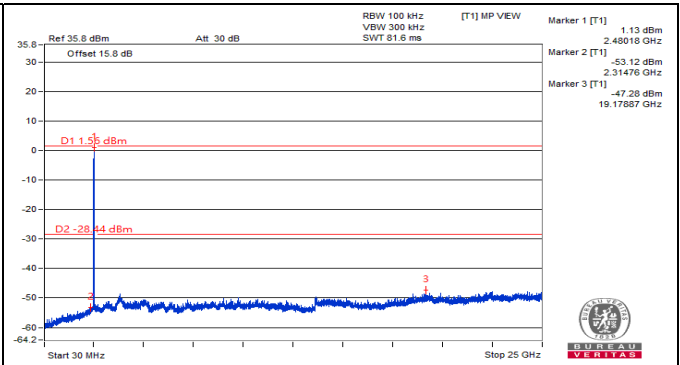


Chain 1: CH 13

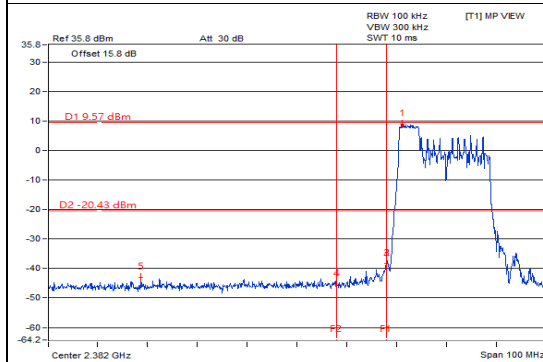


Chain 1: CH 1 Band edge

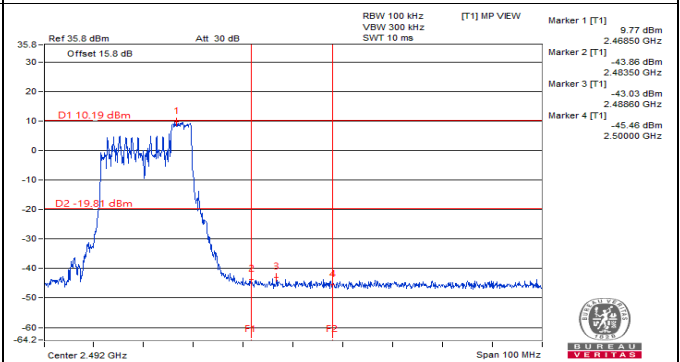

Chain 1: CH 11 Band edge

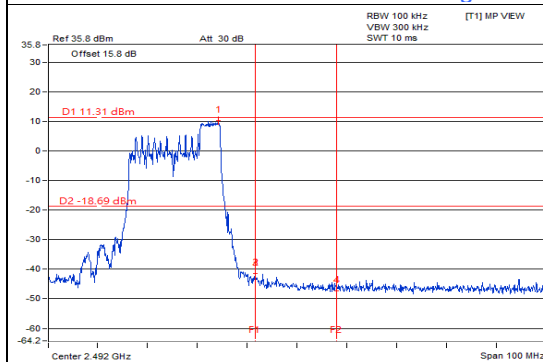



Chain 1: CH 12 Band edge

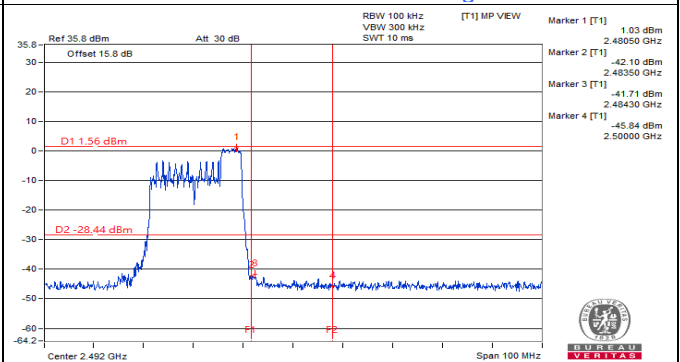


Chain 1: CH 13 Band edge

802.11be (EHT20) 106-tone RU

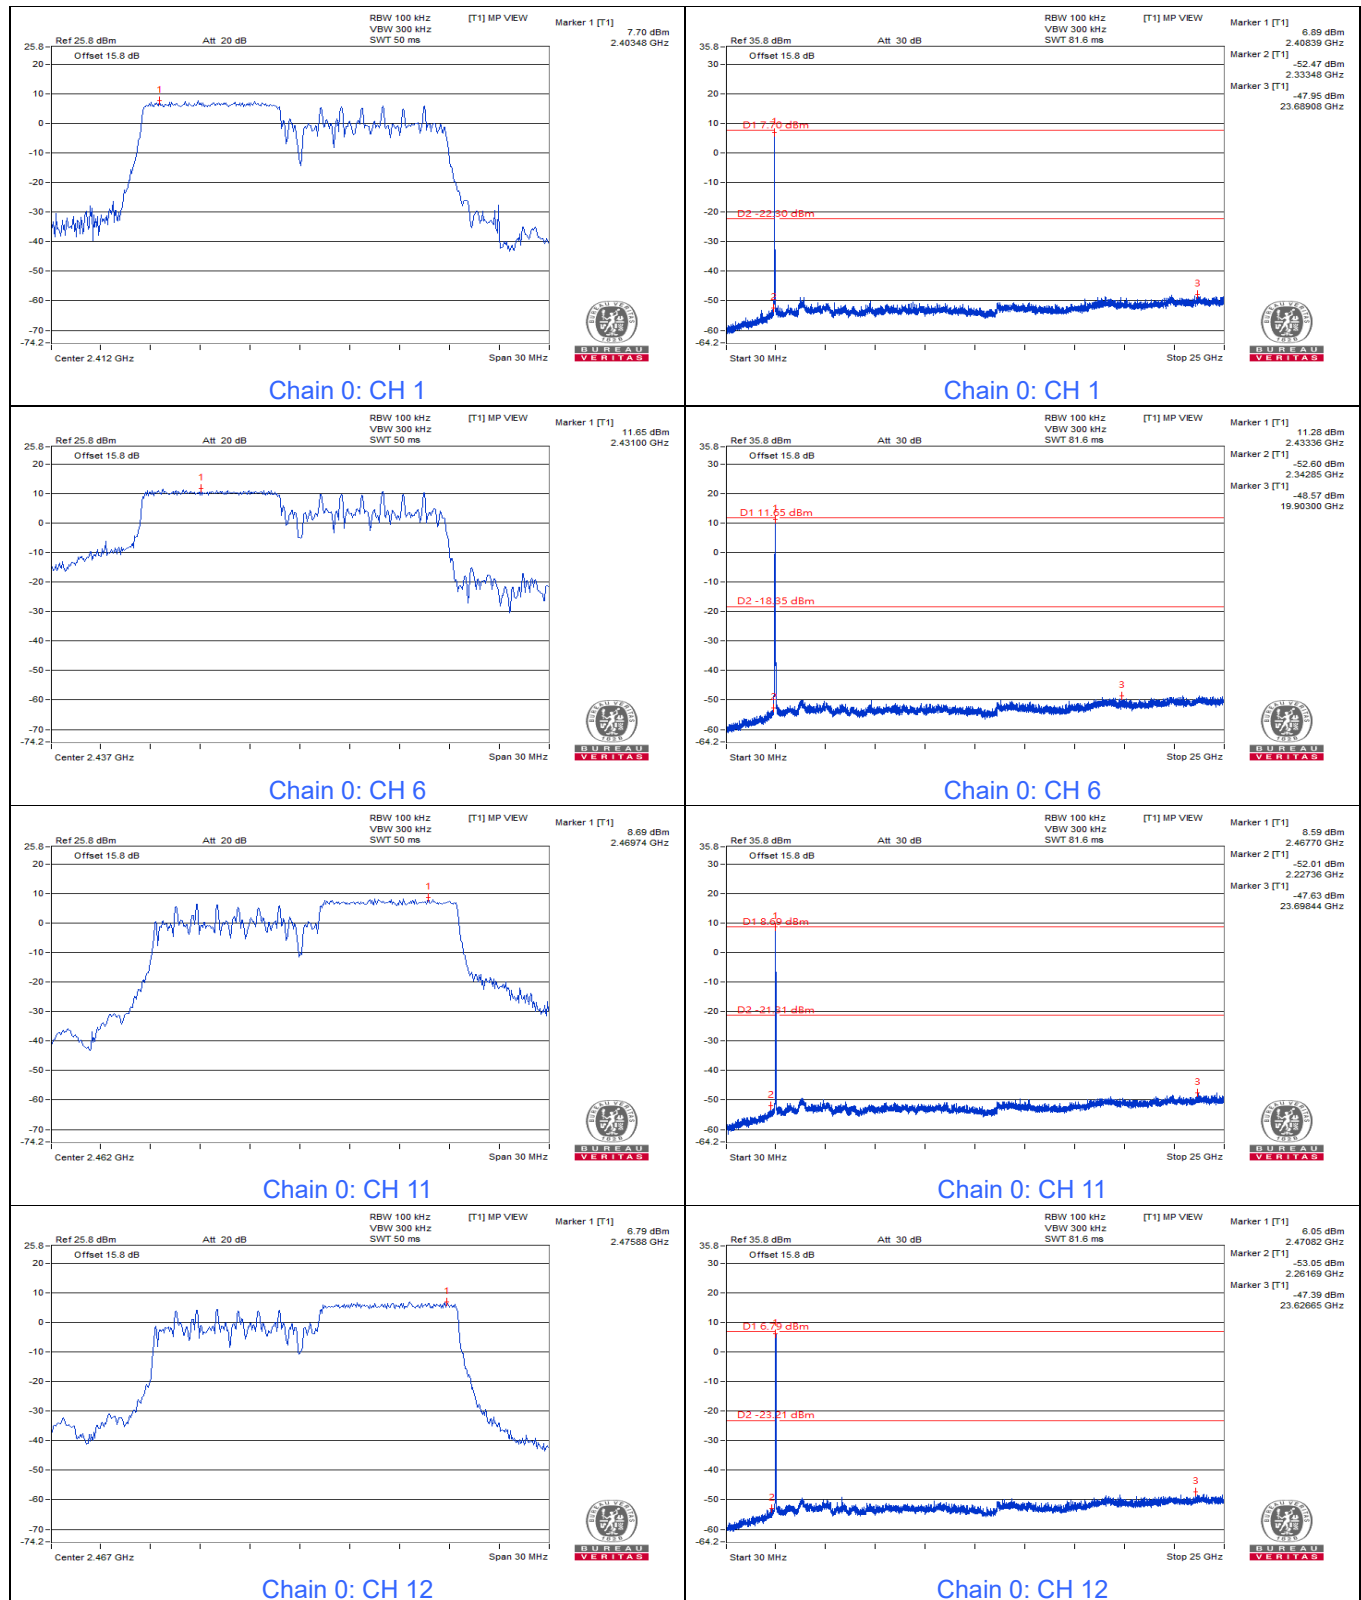


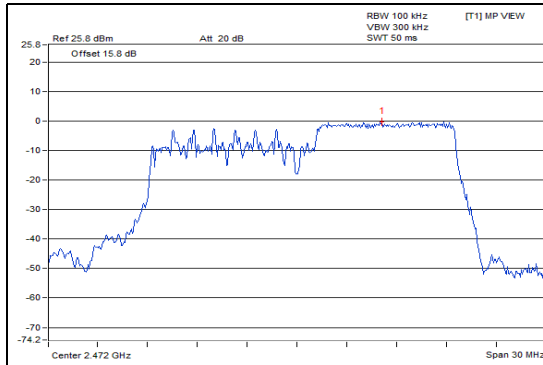


Chain 0: CH 13

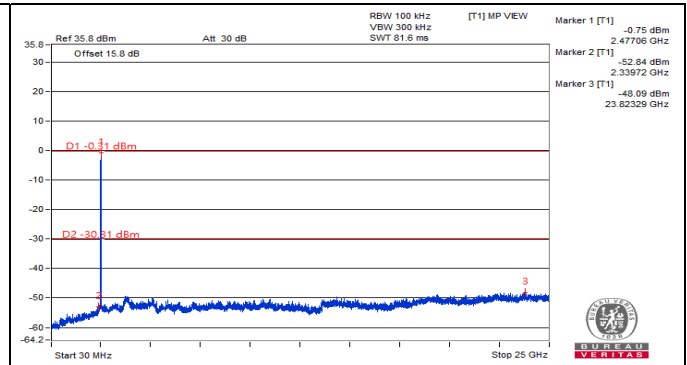


Chain 0: CH 13

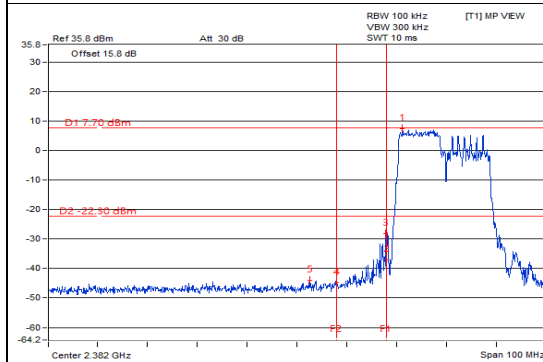


Chain 0: CH 1 Band edge

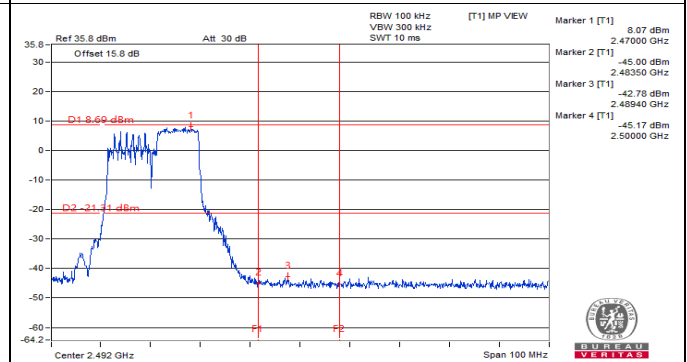


Chain 0: CH 11 Band edge






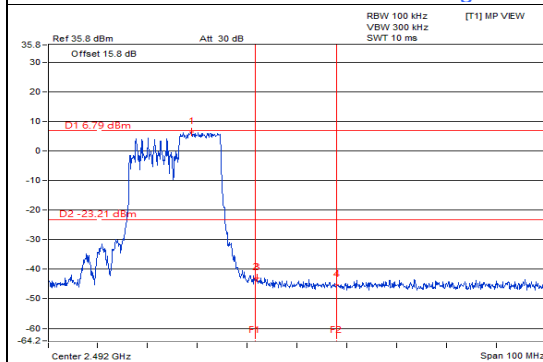


Chain 0: CH 12 Band edge

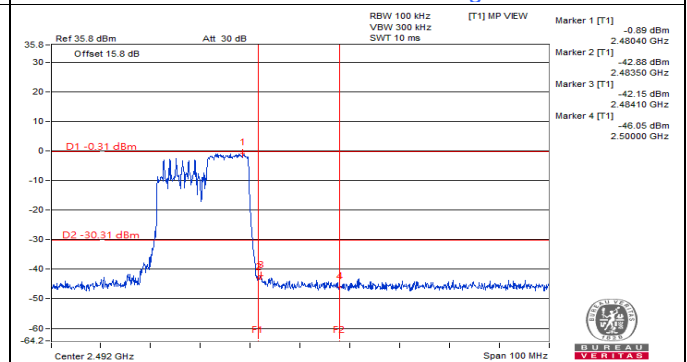



Chain 0: CH 13 Band edge

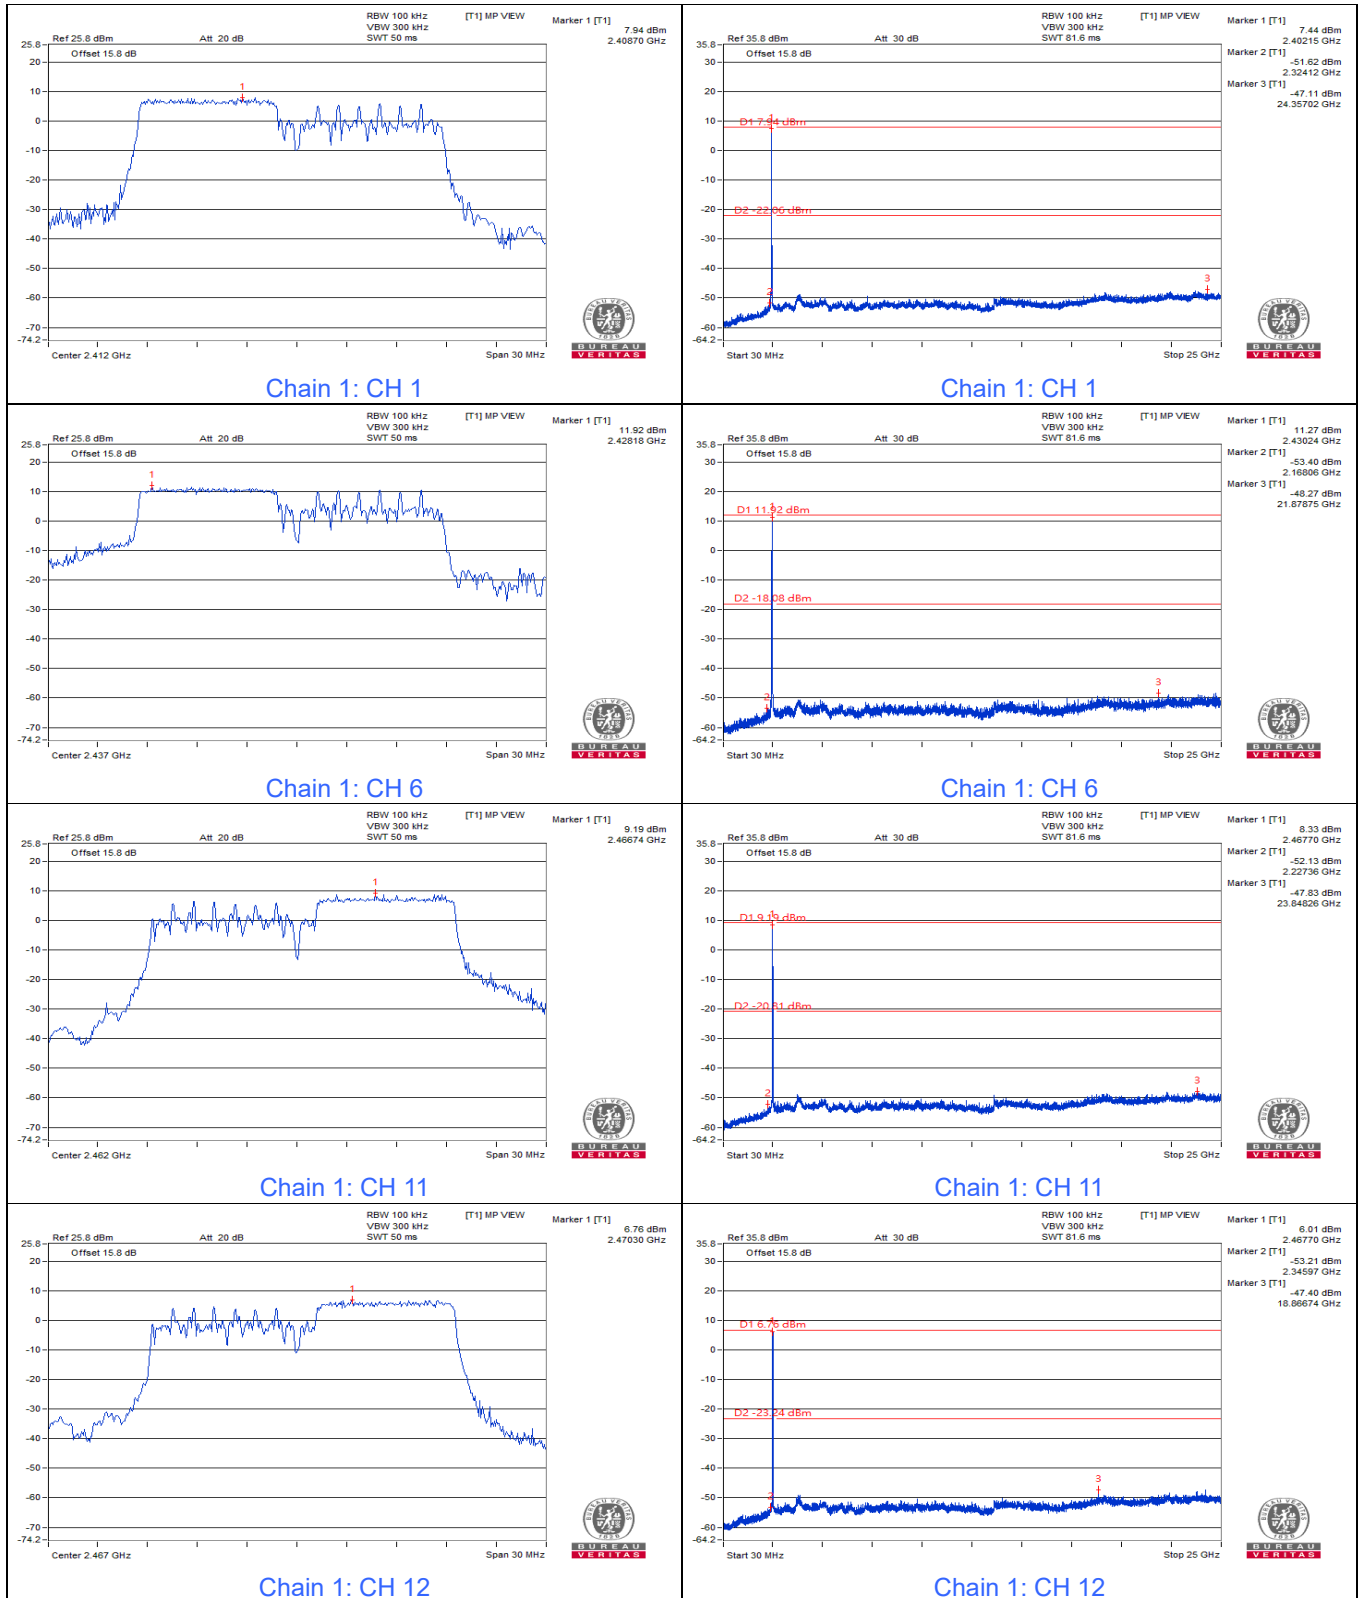

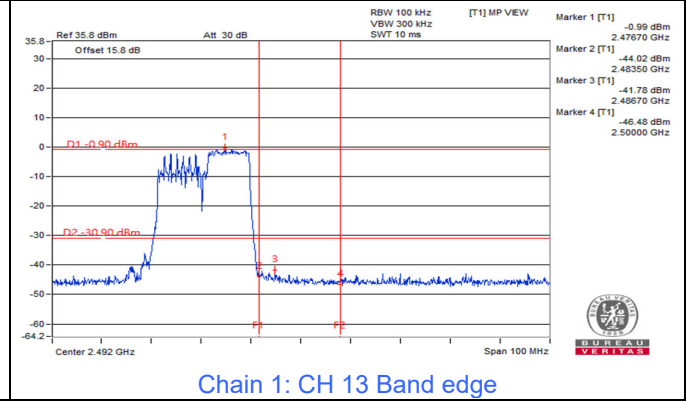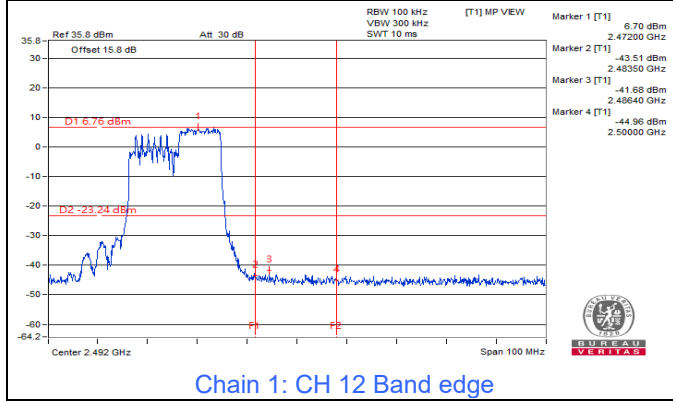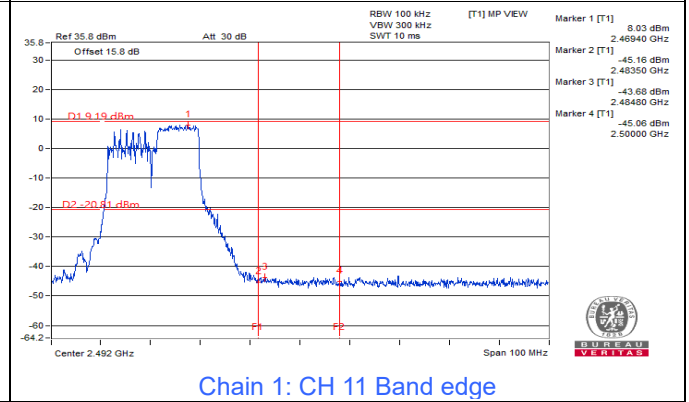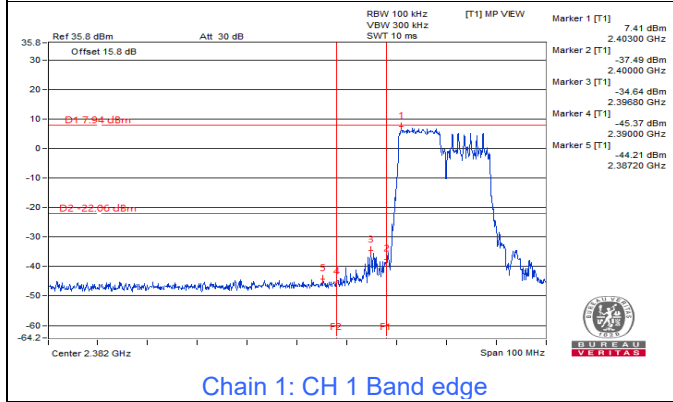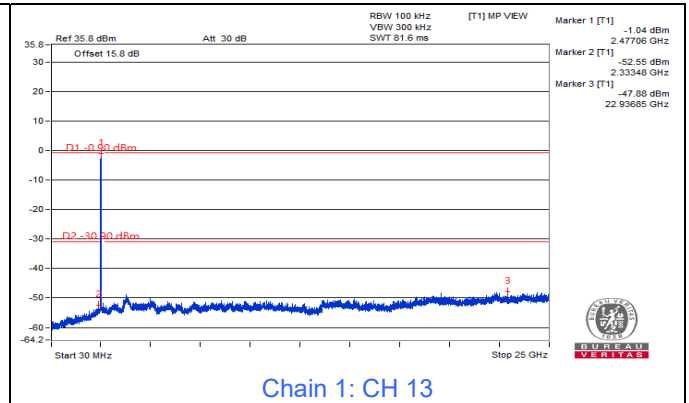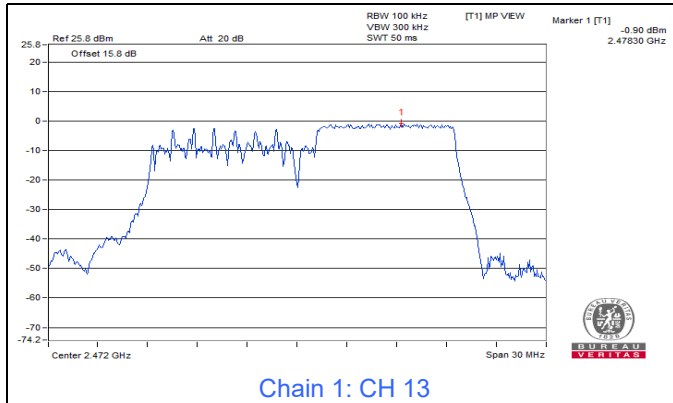


802.11be (EHT20) 52+26-tone MRU

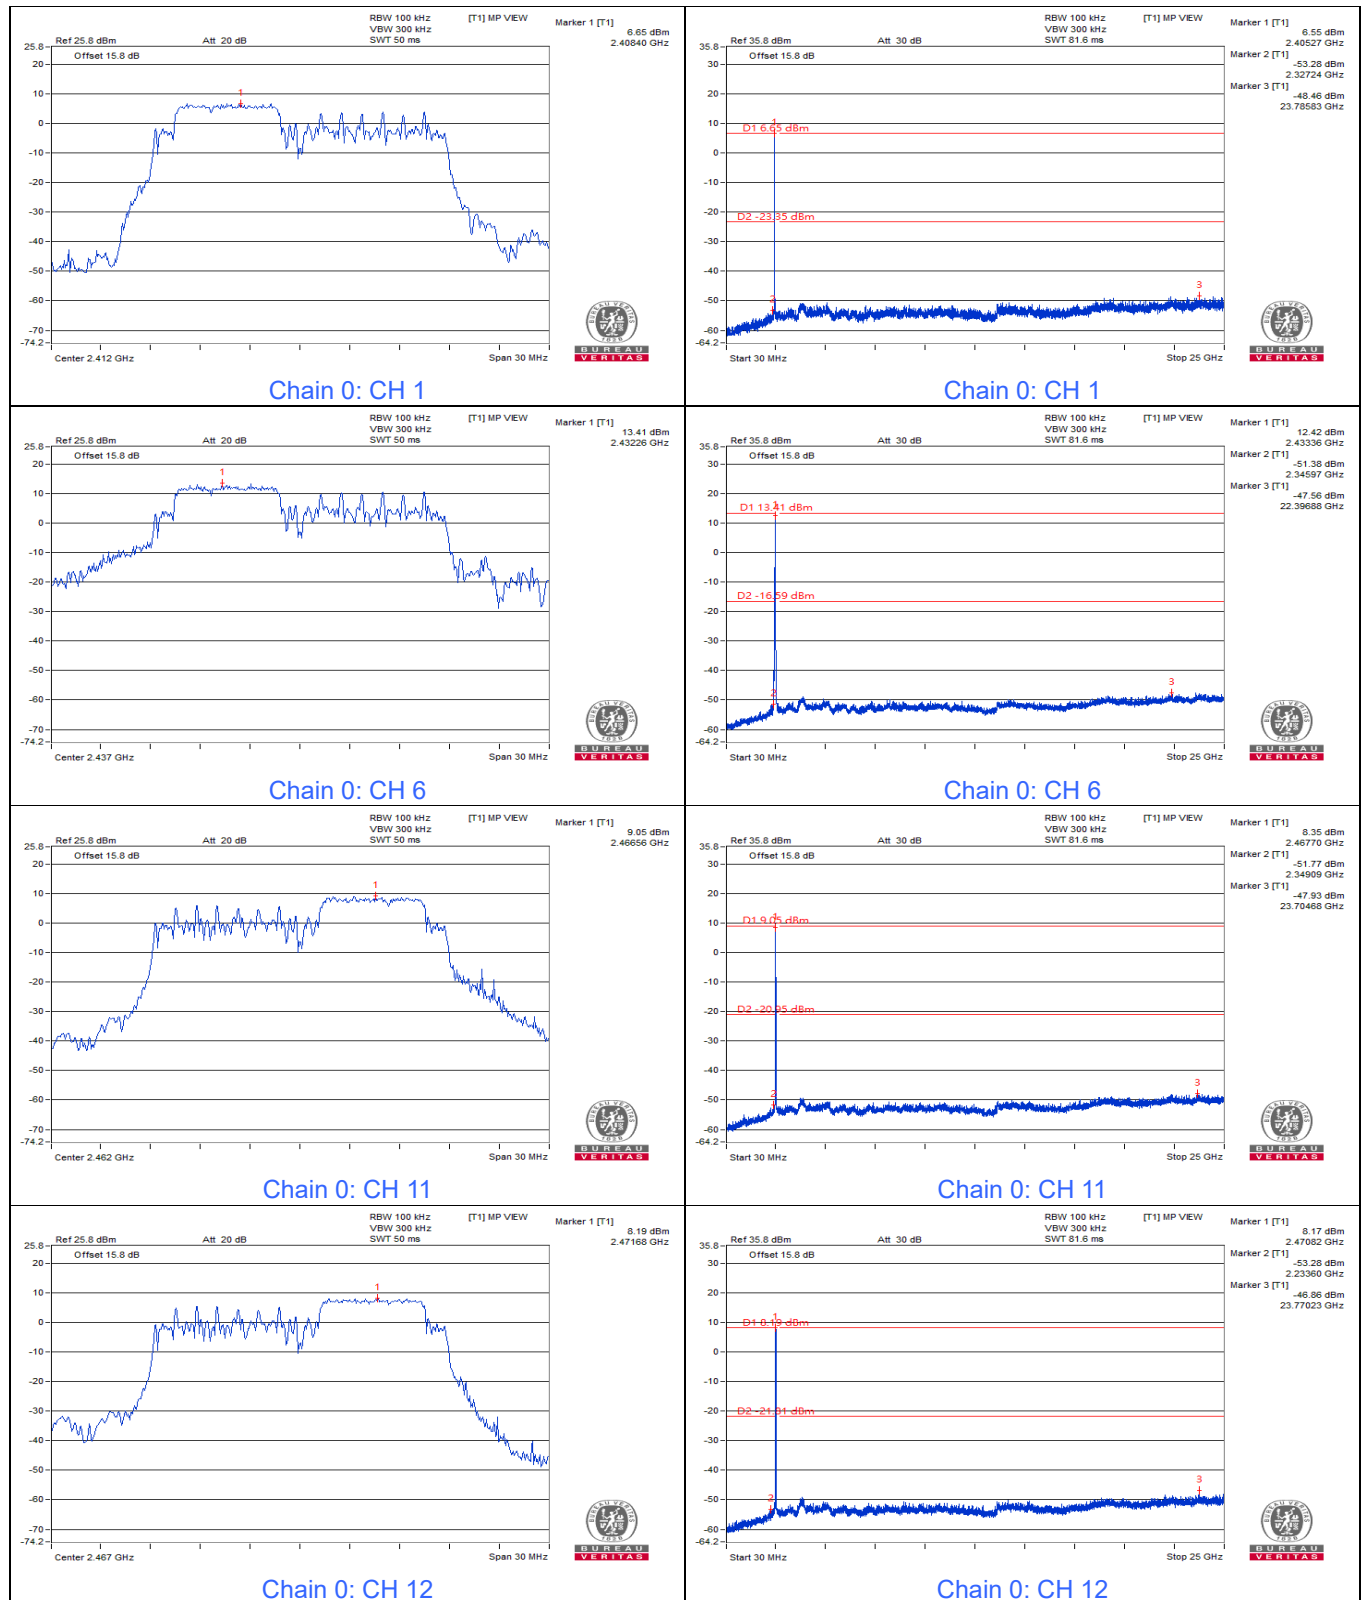


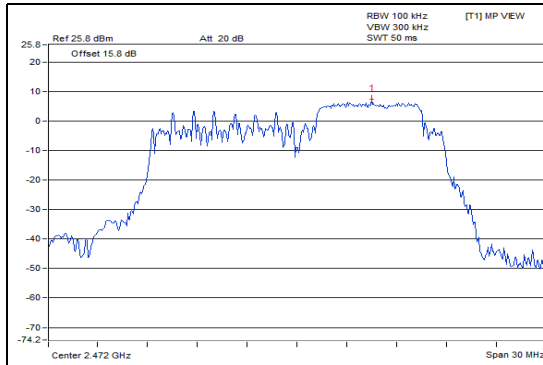


Chain 0: CH 13

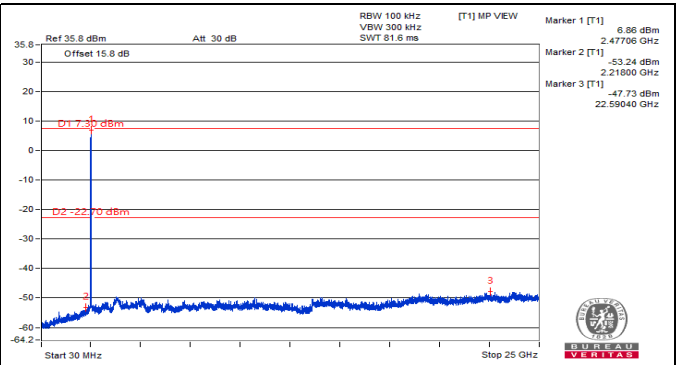


Chain 0: CH 13

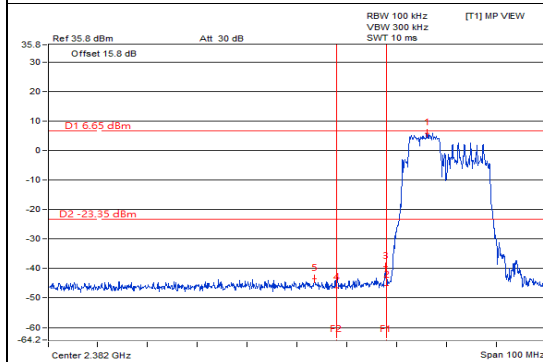


Chain 0: CH 1 Band edge

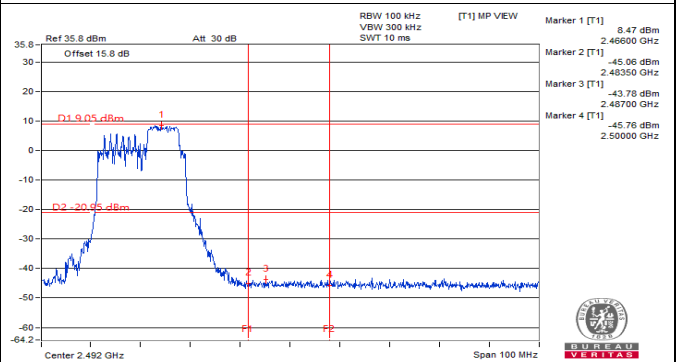


Chain 0: CH 11 Band edge

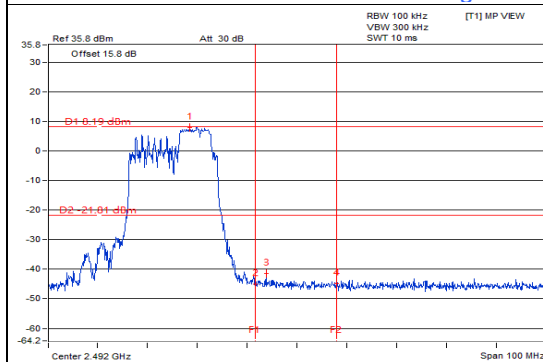


Chain 0: CH 12 Band edge

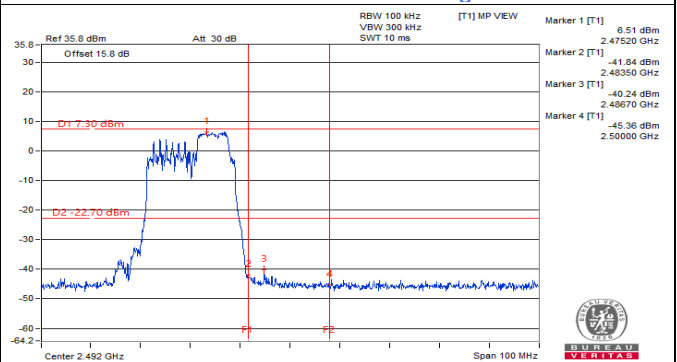


Chain 0: CH 13 Band edge

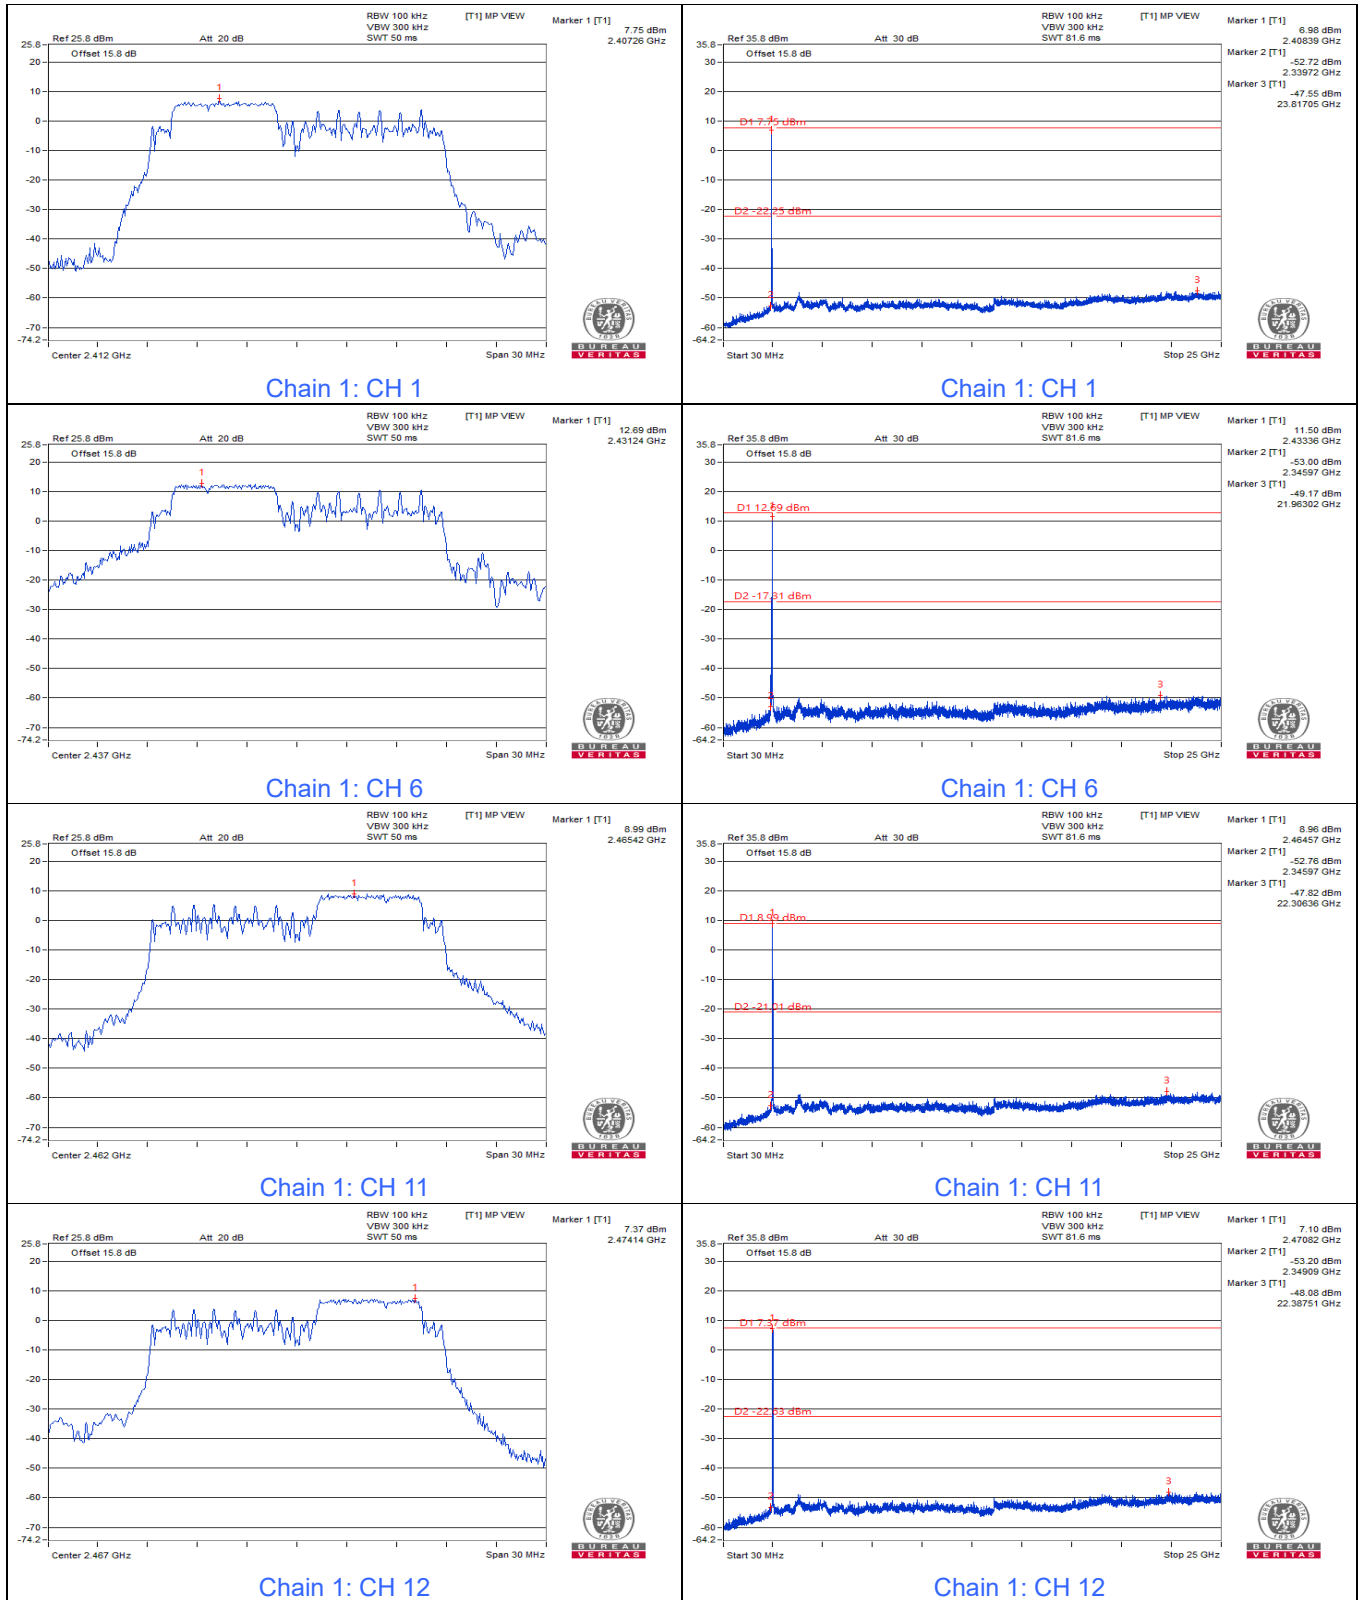


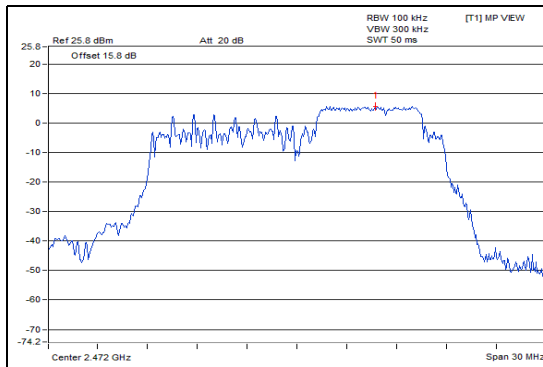


Chain 1: CH 13

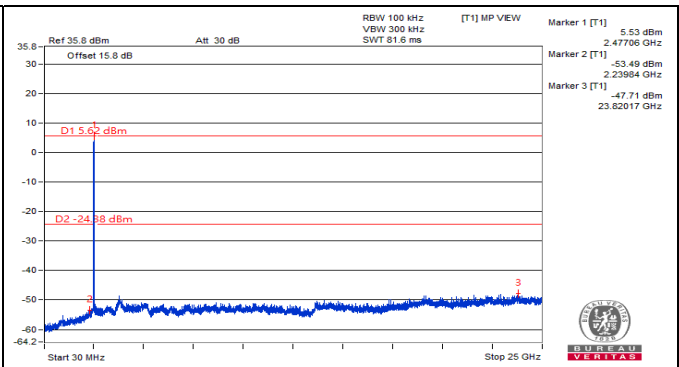


Chain 1: CH 13

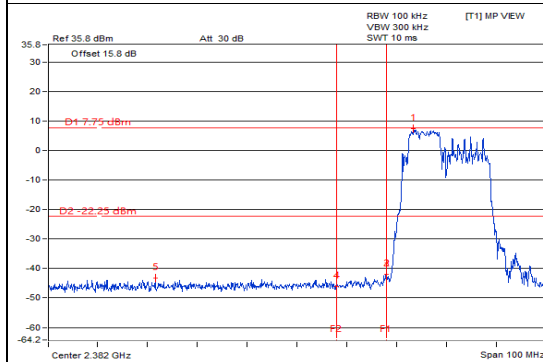


Chain 1: CH 1 Band edge

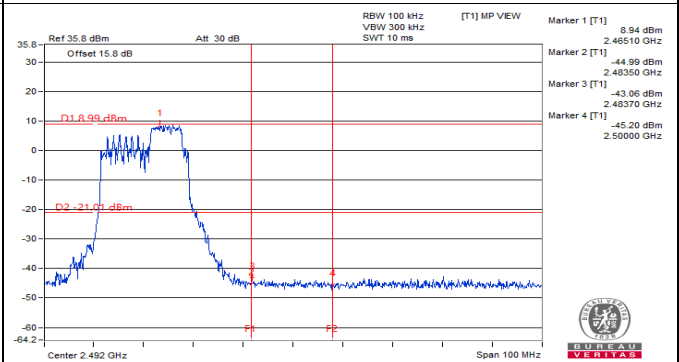

Chain 1: CH 11 Band edge

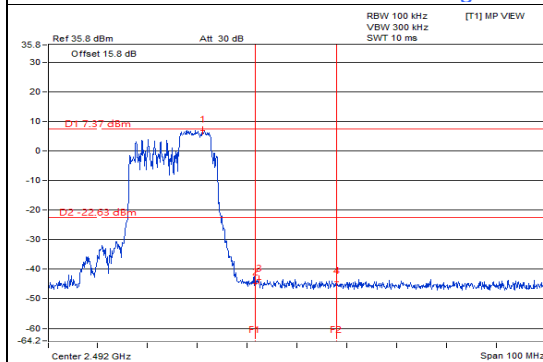



Chain 1: CH 12 Band edge

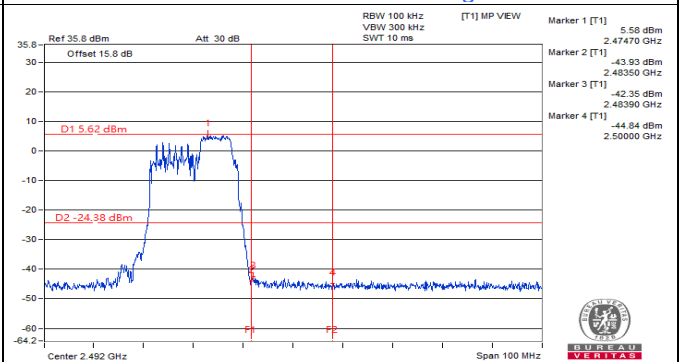


Chain 1: CH 13 Band edge

802.11be (EHT20) 106+26-tone MRU

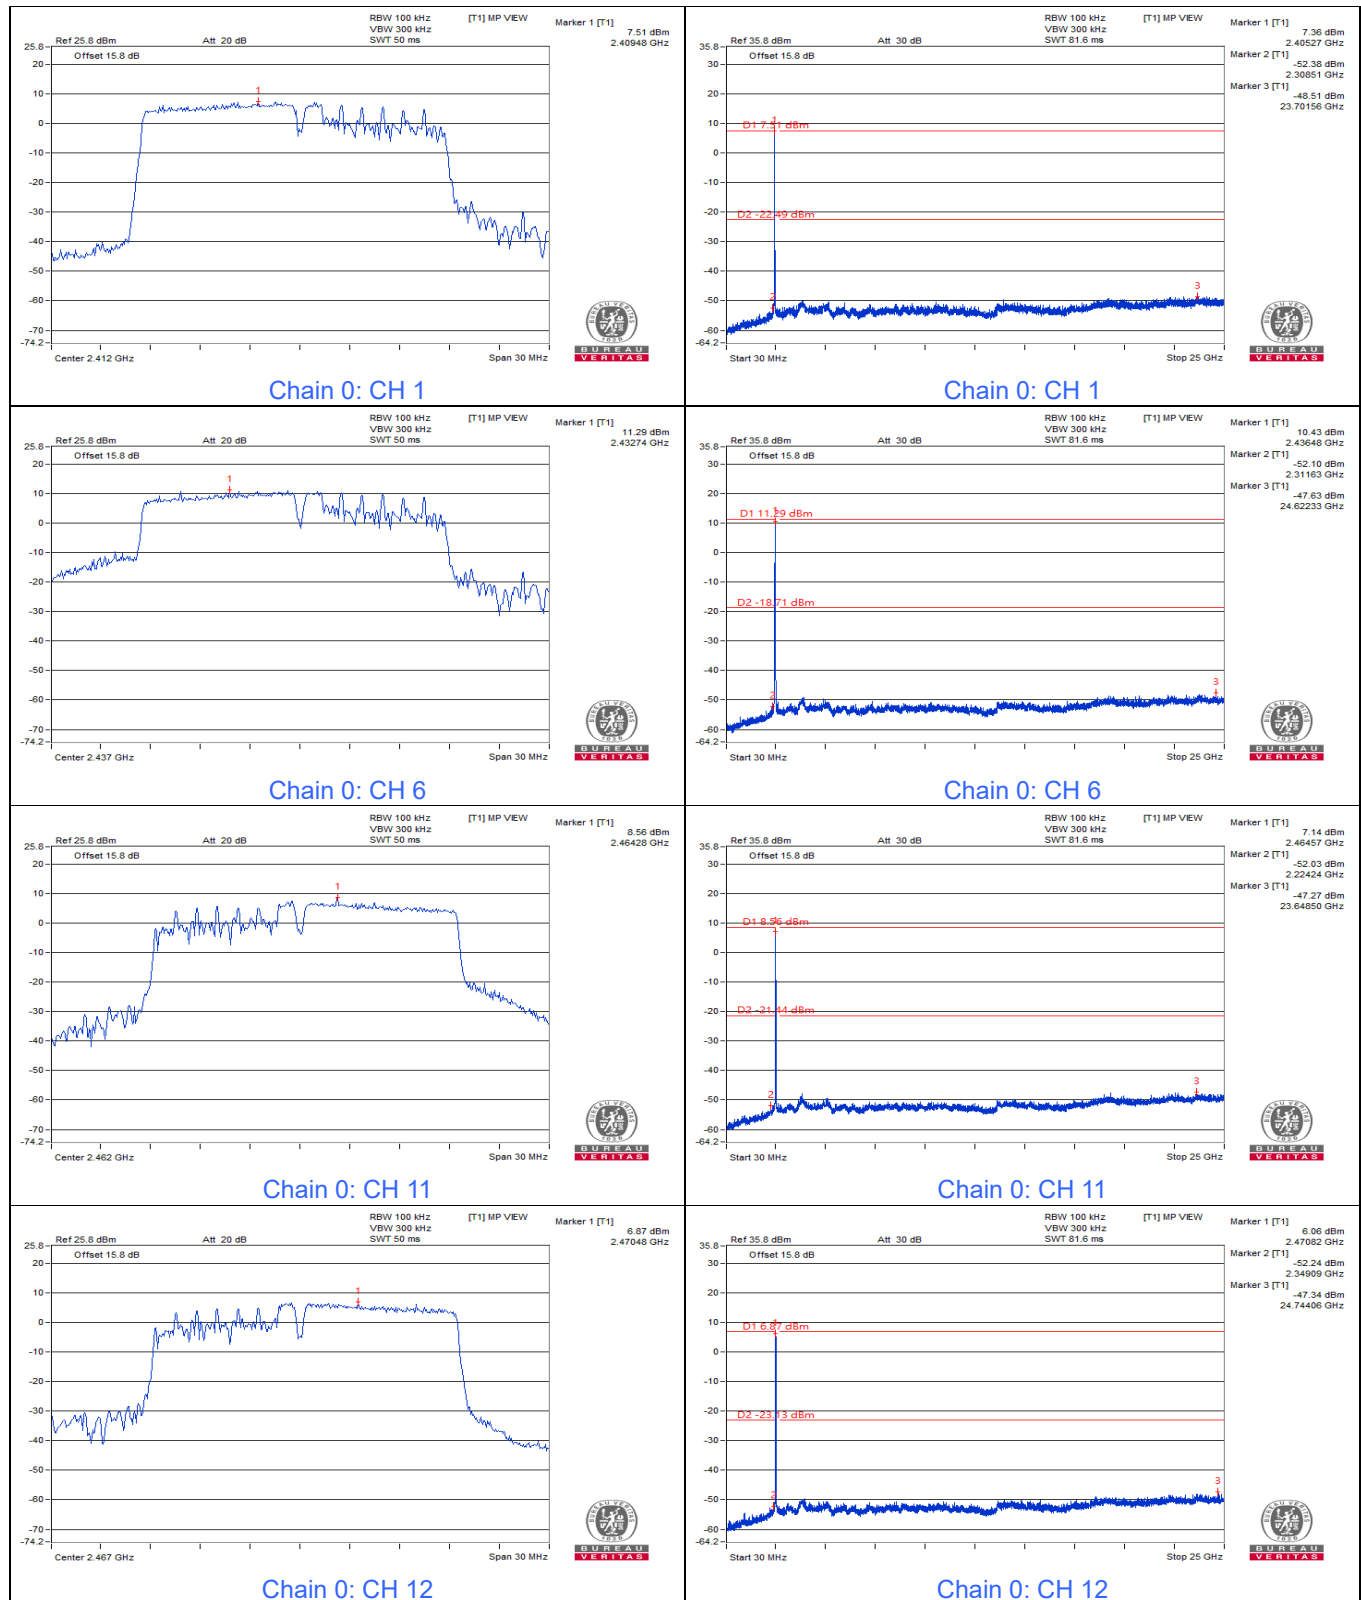


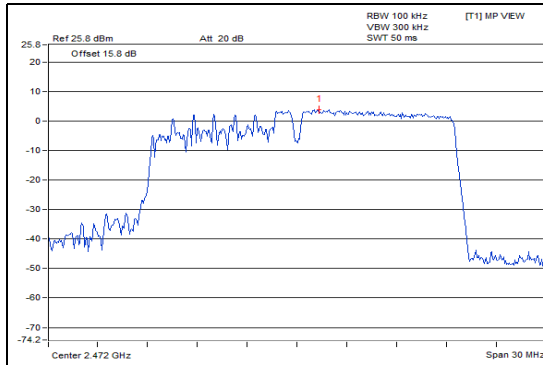


Chain 0: CH 13

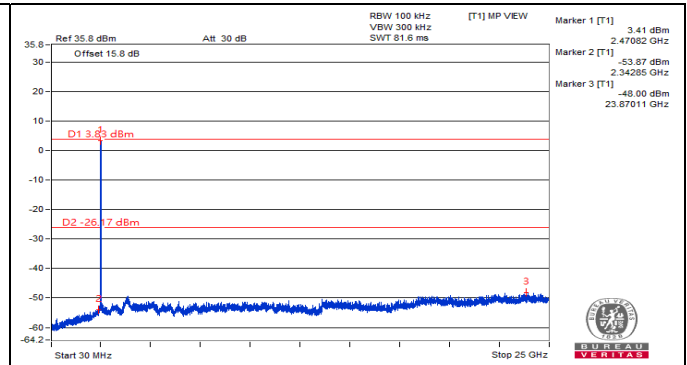


Chain 0: CH 13

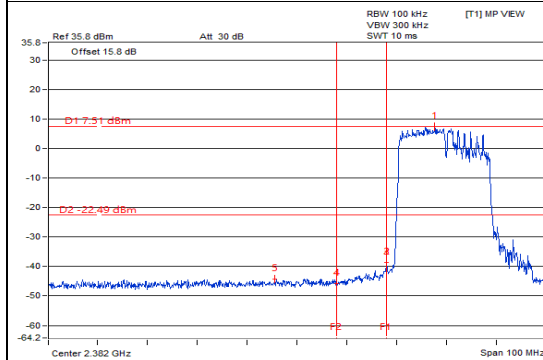


Chain 0: CH 1 Band edge

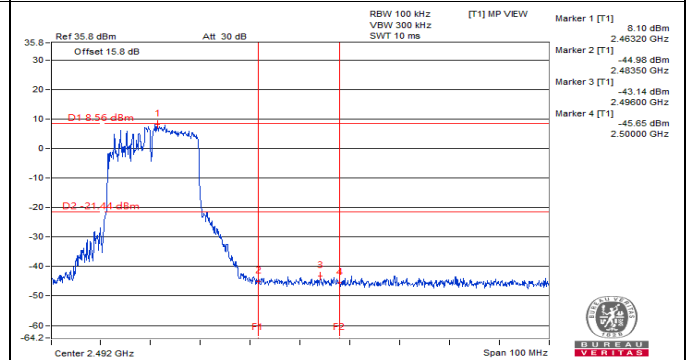









Chain 0: CH 11 Band edge






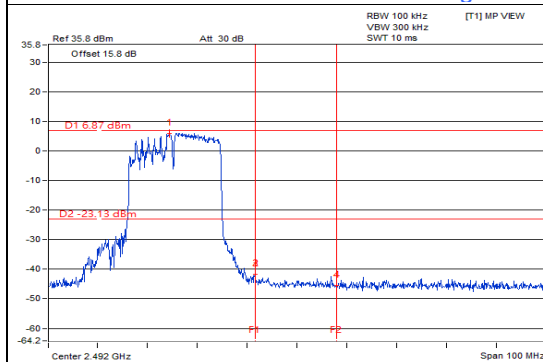


Chain 0: CH 12 Band edge

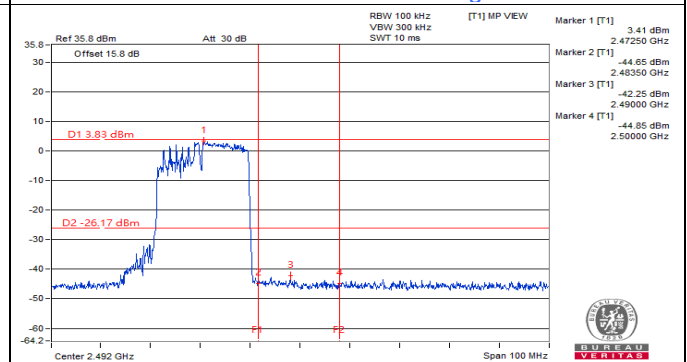

Chain 0: CH 13 Band edge

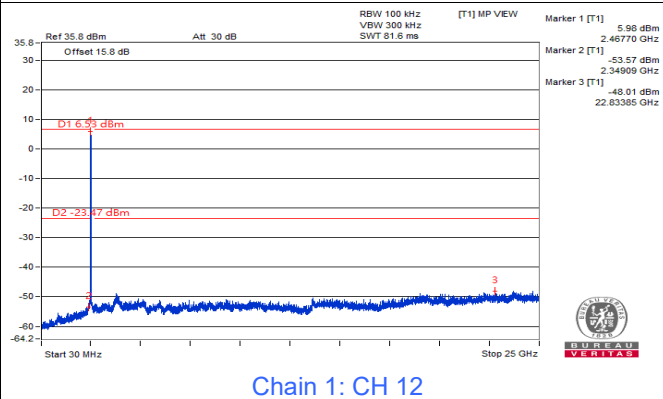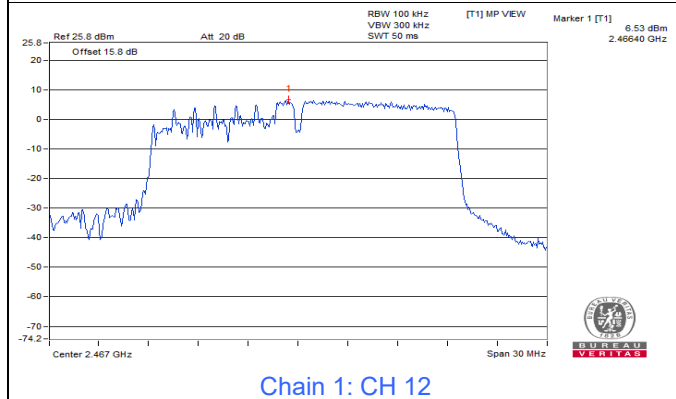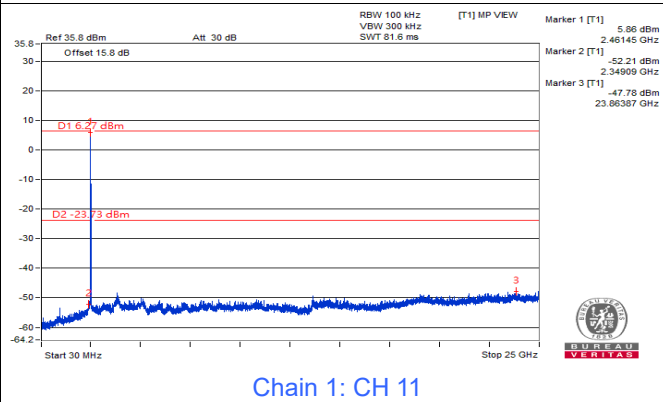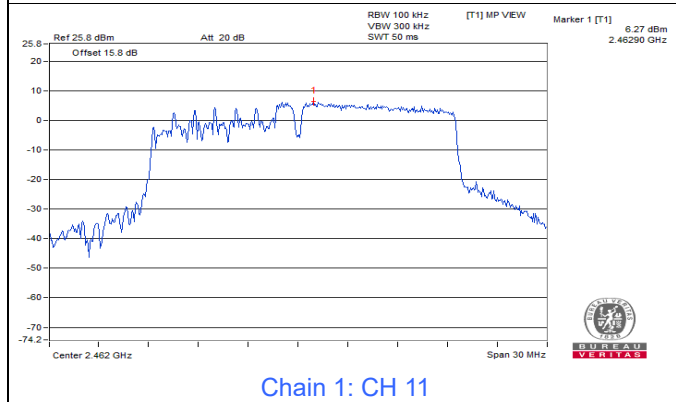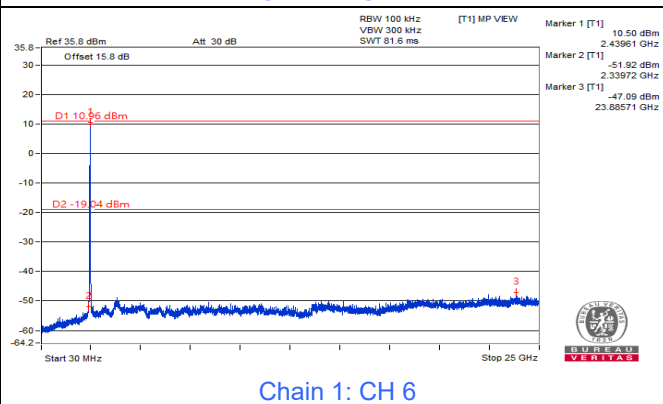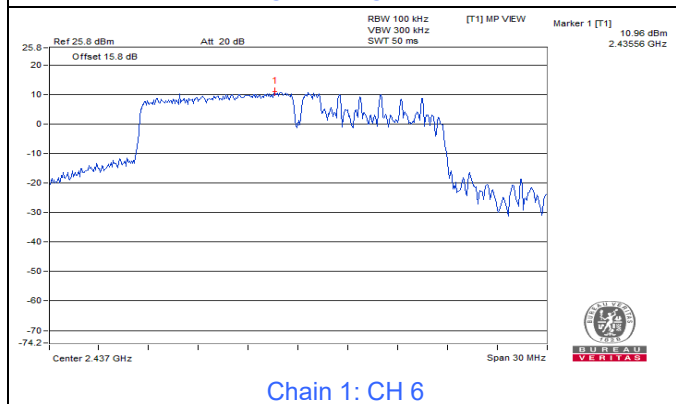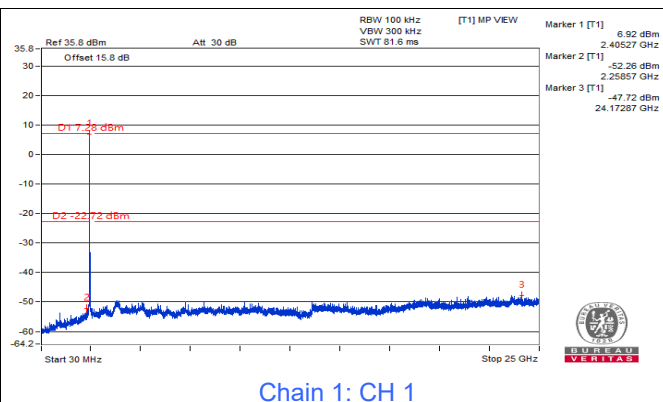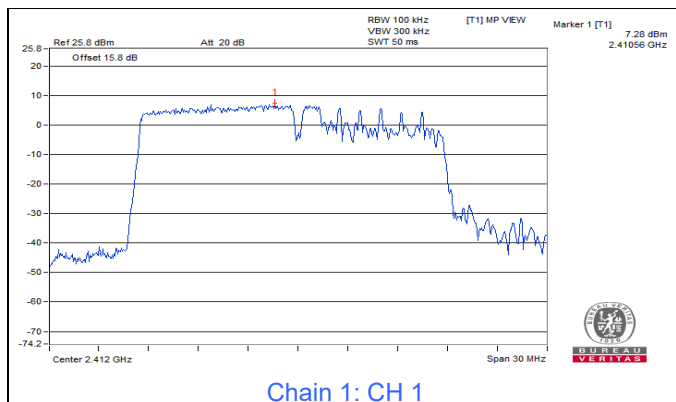

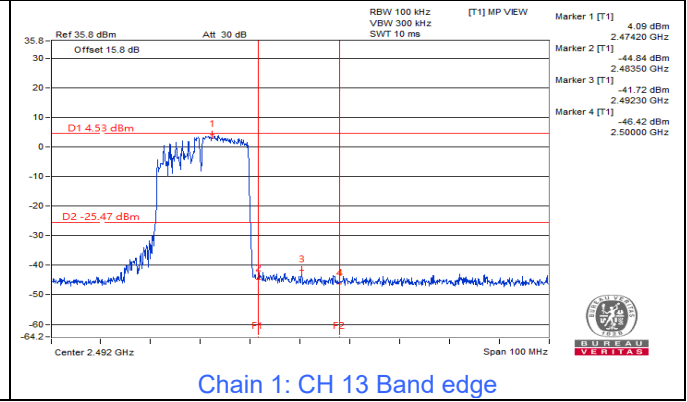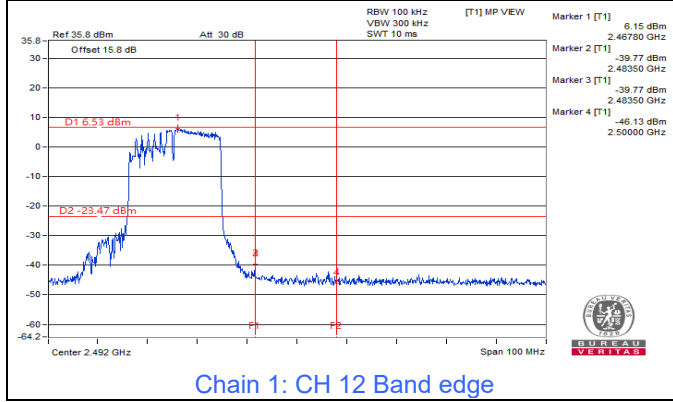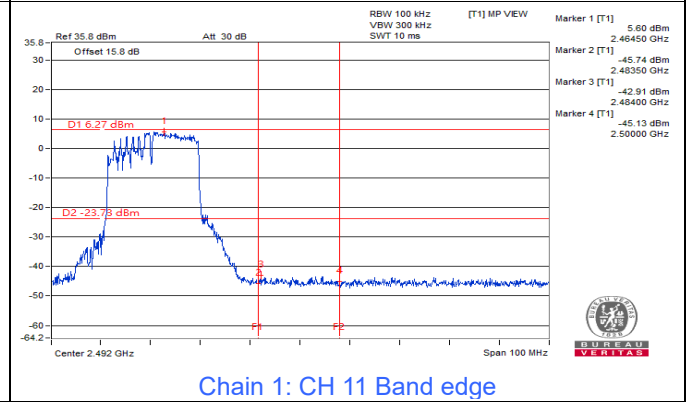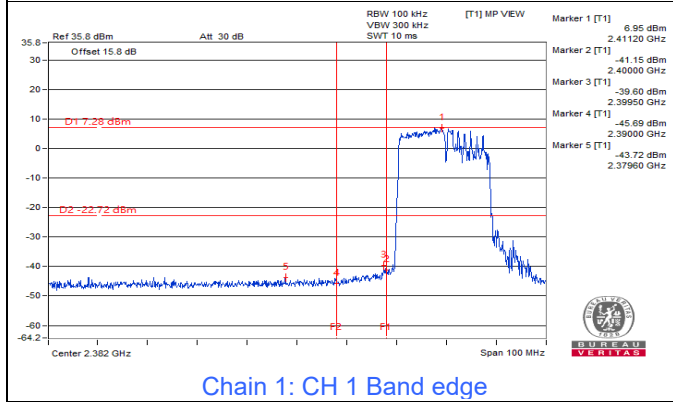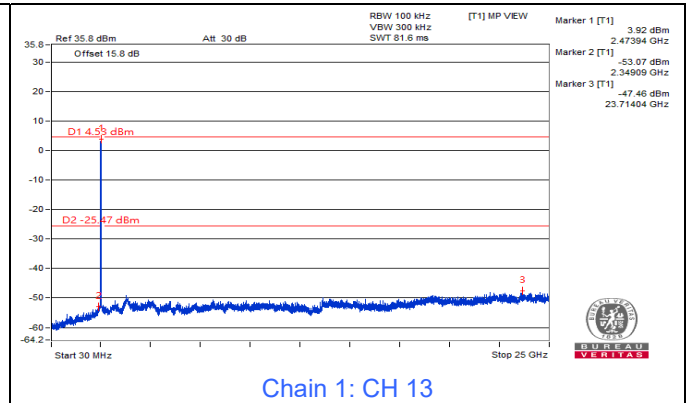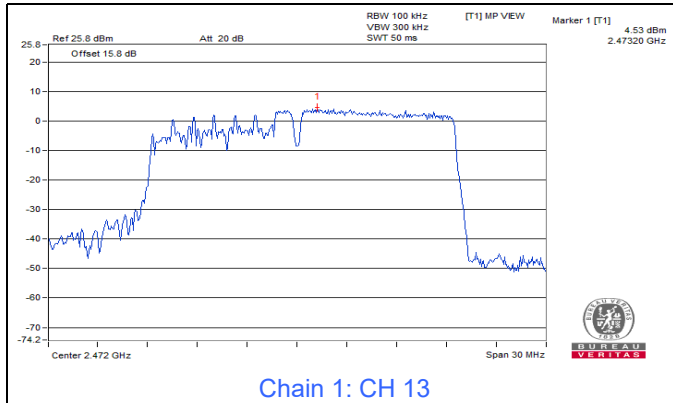

7.5 AC Power Conducted Emissions

Mode C


2Tx

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29 °C, 72% RH
Tested By	Roy Mai		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	9.97	36.75	24.65	46.72	34.62	63.91	53.91	-17.19	-19.29
2	0.26328	9.98	28.11	18.52	38.09	28.50	61.33	51.33	-23.24	-22.83
3	0.32188	9.99	25.71	19.30	35.70	29.29	59.66	49.66	-23.96	-20.37
4	0.48594	10.01	18.25	1.07	28.26	11.08	56.24	46.24	-27.98	-35.16
5	3.74219	10.22	13.54	5.64	23.76	15.86	56.00	46.00	-32.24	-30.14
6	11.39844	10.73	21.68	16.14	32.41	26.87	60.00	50.00	-27.59	-23.13
7	17.93750	11.15	28.02	24.26	39.17	35.41	60.00	50.00	-20.83	-14.59

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

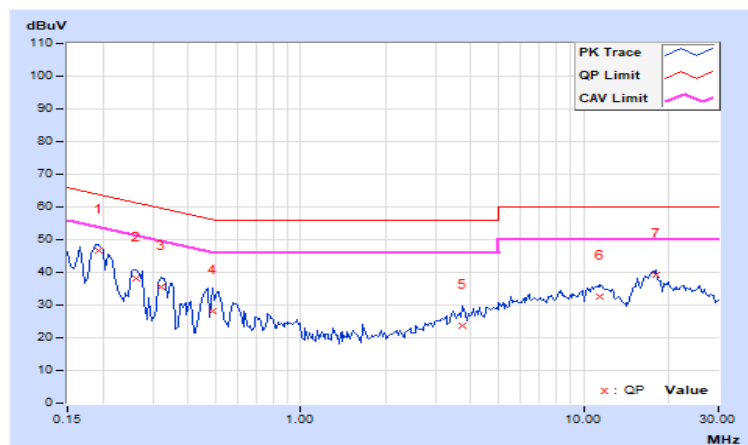


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29 °C, 50% RH
Tested By	Roy Mai		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	9.98	39.17	27.86	49.15	37.84	63.91	53.91	-14.76	-16.07
2	0.25156	9.97	29.35	15.98	39.32	25.95	61.71	51.71	-22.39	-25.76
3	0.32188	9.96	26.95	19.28	36.91	29.24	59.66	49.66	-22.75	-20.42
4	0.50547	9.95	23.85	15.95	33.80	25.90	56.00	46.00	-22.20	-20.10
5	2.45313	10.09	12.59	7.30	22.68	17.39	56.00	46.00	-33.32	-28.61
6	16.66406	10.81	26.19	21.79	37.00	32.60	60.00	50.00	-23.00	-17.40

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

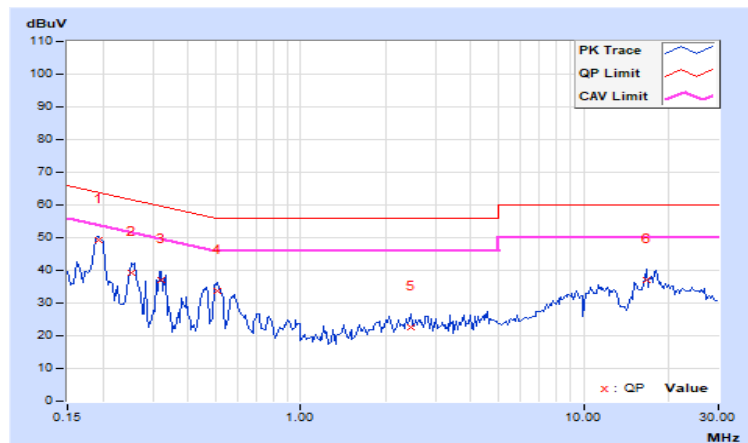

7.6 Unwanted Emissions below 1 GHz

Mode A


1Tx

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	67.1	22.63 PK	40	-17.37	-82.25	9.62	-72.63
2	129.55	22 PK	43.5	-21.5	-82.88	9.62	-73.26
3	348.4	22.34 PK	46	-23.66	-82.54	9.62	-72.92
4	498.51	23.13 PK	46	-22.87	-81.75	9.62	-72.13
5	794.85	24.61 PK	46	-21.39	-80.27	9.62	-70.65
6	928.71	25.04 PK	46	-20.96	-79.84	9.62	-70.22

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

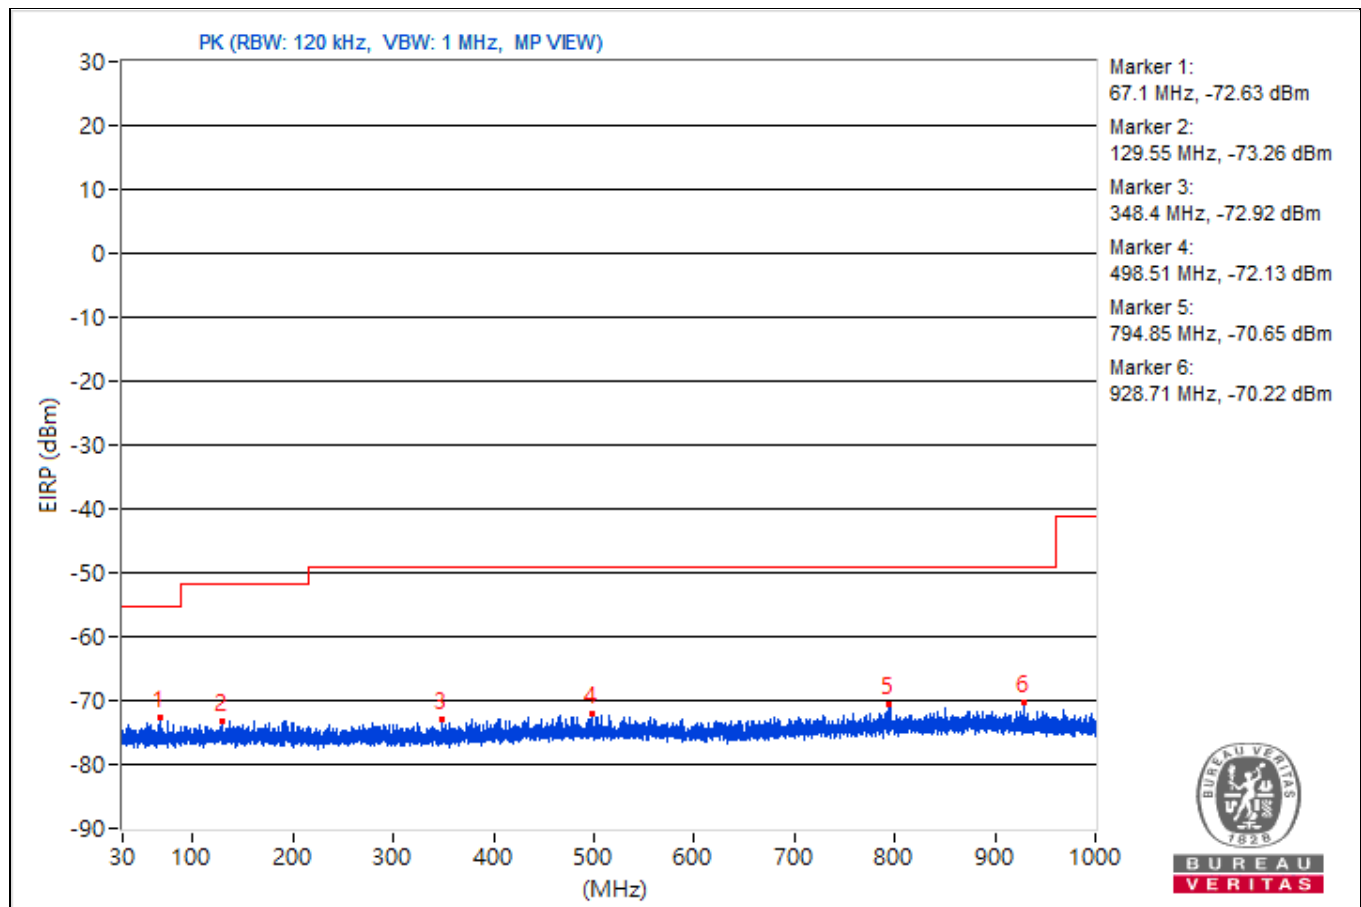


2Tx

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	38.97	27.27 PK	40	-12.73	-82.72	-84.8	12.63	-67.99
2	94.02	27.24 PK	43.5	-16.26	-82.63	-85.02	12.63	-68.02
3	241.82	27.56 PK	46	-18.44	-81.91	-85.47	12.63	-67.7
4	533.79	28.56 PK	46	-17.44	-83.71	-81.31	12.63	-66.7
5	772.05	28.56 PK	46	-17.44	-81.12	-84.03	12.63	-66.7
6	950.53	28.89 PK	46	-17.11	-80.71	-83.86	12.63	-66.37

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

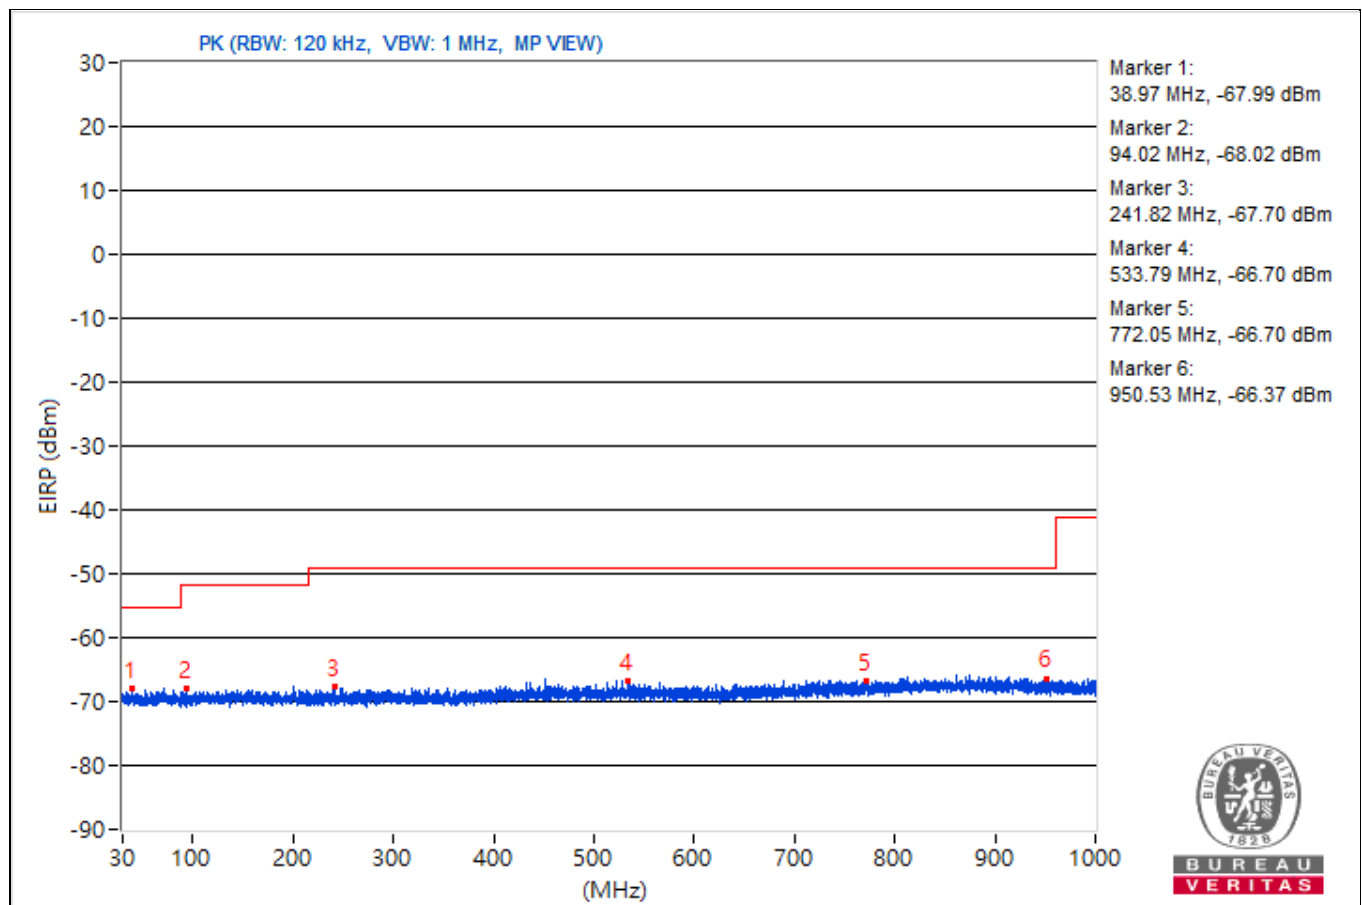

Mode B


1Tx

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.29	23.5 PK	40.0	-16.5	1.00 H	68	41.6	-18.1
2	199.17	38.8 QP	43.5	-4.7	1.50 H	360	59.8	-21.0
3	498.90	38.5 PK	46.0	-7.5	2.00 H	344	51.2	-12.7
4	554.04	33.4 PK	46.0	-12.6	1.50 H	220	45.0	-11.6
5	657.95	33.2 PK	46.0	-12.8	1.00 H	113	42.6	-9.4
6	973.52	25.3 PK	54.0	-28.7	2.00 H	288	30.5	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

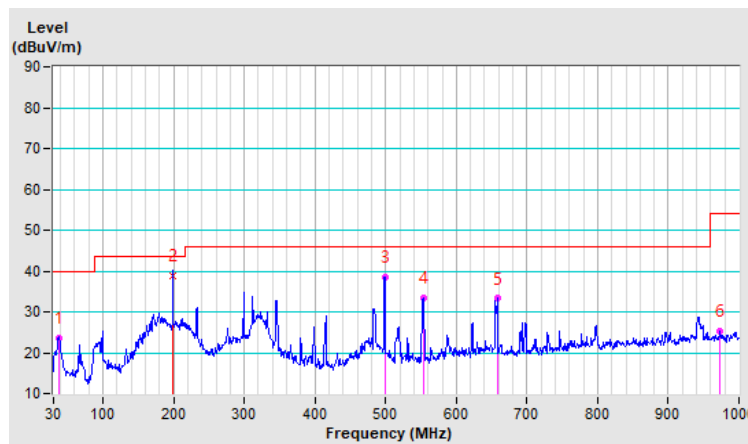


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.98	33.8 PK	40.0	-6.2	1.00 V	156	52.1	-18.3
2	199.53	32.1 PK	43.5	-11.4	2.00 V	290	53.2	-21.1
3	311.64	35.6 PK	46.0	-10.4	2.00 V	360	52.4	-16.8
4	344.96	34.7 PK	46.0	-11.3	1.50 V	154	51.0	-16.3
5	413.97	36.2 PK	46.0	-9.8	1.00 V	118	50.6	-14.4
6	498.90	35.8 PK	46.0	-10.2	1.00 V	111	48.5	-12.7
7	554.09	36.9 PK	46.0	-9.1	1.00 V	170	48.5	-11.6
8	658.00	35.4 PK	46.0	-10.6	1.00 V	239	44.8	-9.4
9	974.80	25.0 PK	54.0	-29.0	1.50 V	164	30.2	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

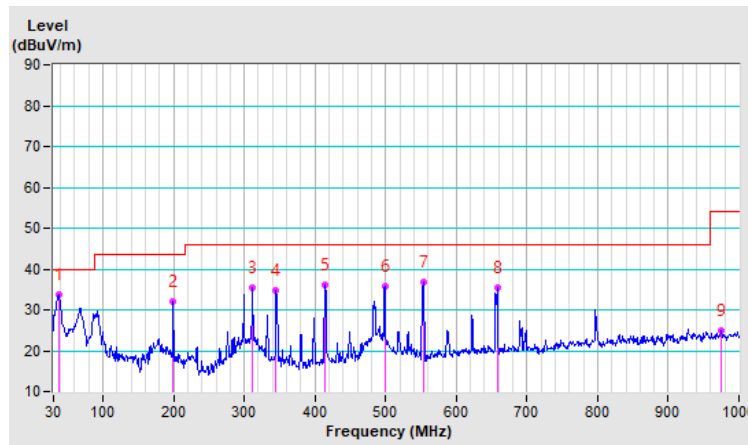


2Tx

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.60	24.7 PK	40.0	-15.3	1.50 H	1	42.8	-18.1
2	199.17	39.2 QP	43.5	-4.3	1.50 H	1	60.2	-21.0
3	346.32	34.2 PK	46.0	-11.8	1.50 H	1	50.5	-16.3
4	498.87	39.3 PK	46.0	-6.7	2.00 H	352	52.0	-12.7
5	658.00	35.3 PK	46.0	-10.7	1.00 H	112	44.7	-9.4
6	979.90	26.1 PK	54.0	-27.9	1.50 H	305	31.3	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

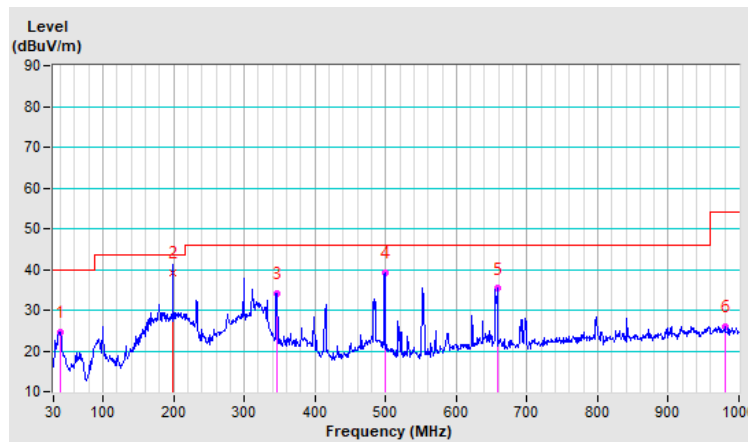


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Felix.Chang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.49	36.2 PK	40.0	-3.8	1.00 V	25	54.3	-18.1
2	199.46	32.1 PK	43.5	-11.4	2.00 V	302	53.2	-21.1
3	346.32	40.1 PK	46.0	-5.9	1.50 V	360	56.4	-16.3
4	413.93	38.4 PK	46.0	-7.6	1.50 V	360	52.8	-14.4
5	497.88	36.9 PK	46.0	-9.1	1.00 V	117	49.6	-12.7
6	551.91	36.4 PK	46.0	-9.6	1.00 V	335	48.0	-11.6
7	658.00	37.4 PK	46.0	-8.6	1.50 V	335	46.8	-9.4
8	973.35	28.7 PK	54.0	-25.3	1.00 V	360	33.9	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

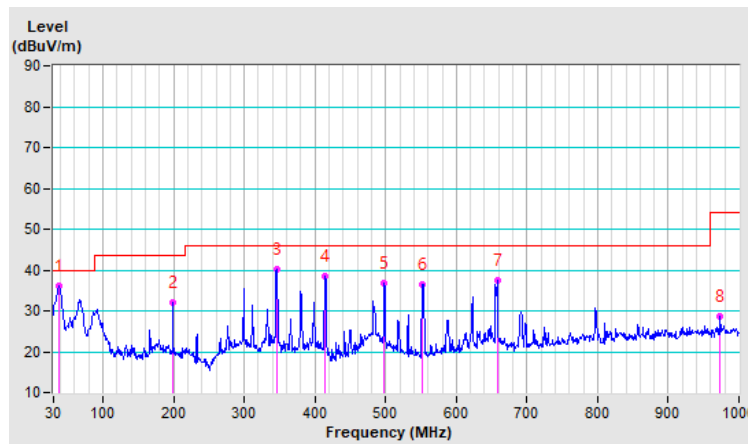

7.7 Unwanted Emissions above 1 GHz

Mode A


1Tx

Conducted Unwanted Emissions

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.88	51.86 PK	74	-22.14	-48.32	4.92	-43.4
2	2339.88	43.65 AV	54	-10.35	-56.53	4.92	-51.61
3	4824.1	54.8 PK	74	-19.2	-45.38	4.92	-40.46
4	4824.1	45.2 AV	54	-8.8	-54.98	4.92	-50.06
5	14476.71	53.24 PK	74	-20.76	-46.94	4.92	-42.02
6	14476.71	43.52 AV	54	-10.48	-56.66	4.92	-51.74
7	23993.2	52.88 PK	74	-21.12	-47.3	4.92	-42.38
8	23993.2	45.4 AV	54	-8.6	-54.78	4.92	-49.86


Note: Margin value = Emission Level - Limit value

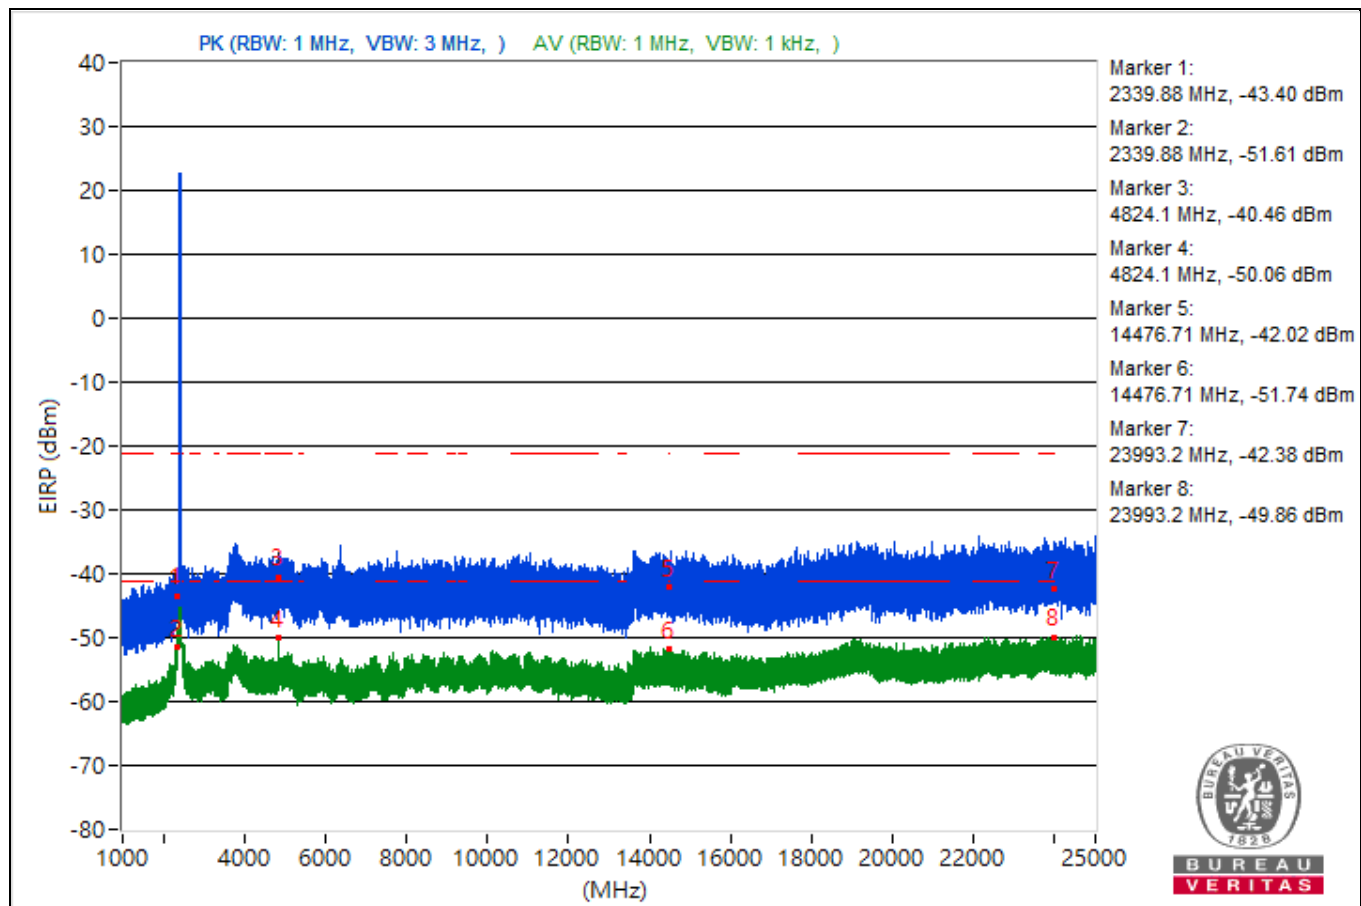

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2312.97	52.18 PK	74	-21.82	-48	4.92	-43.08
2	2312.97	42.91 AV	54	-11.09	-57.27	4.92	-52.35
3	4873.88	55.63 PK	74	-18.37	-44.55	4.92	-39.63
4	4873.88	44.63 AV	54	-9.37	-55.55	4.92	-50.63
5	14483.29	51.41 PK	74	-22.59	-48.77	4.92	-43.85
6	14483.29	43.08 AV	54	-10.92	-57.1	4.92	-52.18
7	23649.5	56.33 PK	74	-17.67	-43.85	4.92	-38.93
8	23649.5	45.73 AV	54	-8.27	-54.45	4.92	-49.53


Note: Margin value = Emission Level - Limit value

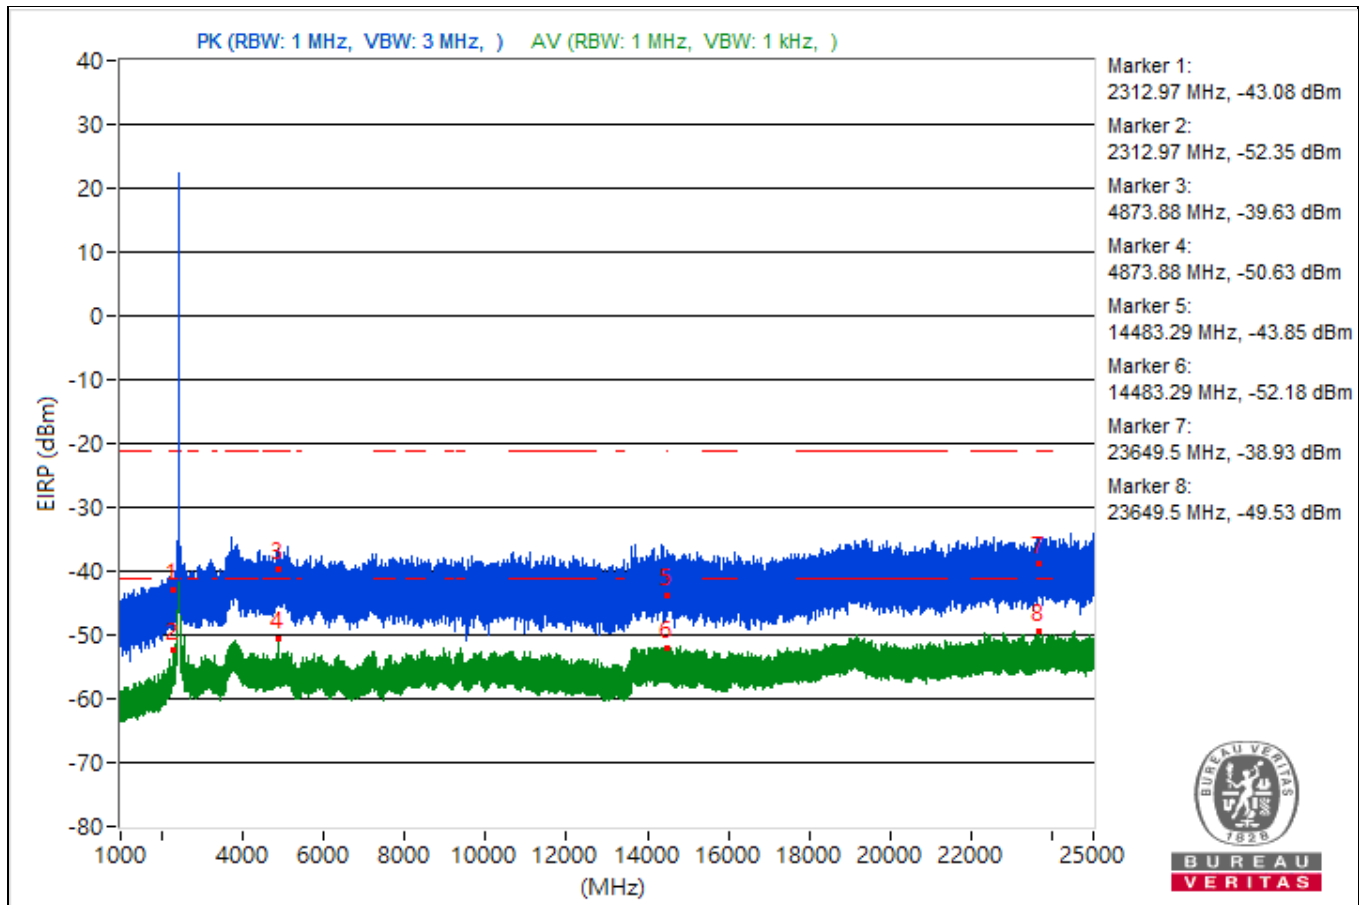

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.56	51.67 PK	74	-22.33	-48.51	4.92	-43.59
2	2338.56	42.49 AV	54	-11.51	-57.69	4.92	-52.77
3	3821.23	54.99 PK	74	-19.01	-45.19	4.92	-40.27
4	3821.23	44.19 AV	54	-9.81	-55.99	4.92	-51.07
5	10602.93	51.22 PK	74	-22.78	-48.96	4.92	-44.04
6	10602.93	43.07 AV	54	-10.93	-57.11	4.92	-52.19
7	23687.9	54.74 PK	74	-19.26	-45.44	4.92	-40.52
8	23687.9	45.37 AV	54	-8.63	-54.81	4.92	-49.89


Note: Margin value = Emission Level - Limit value

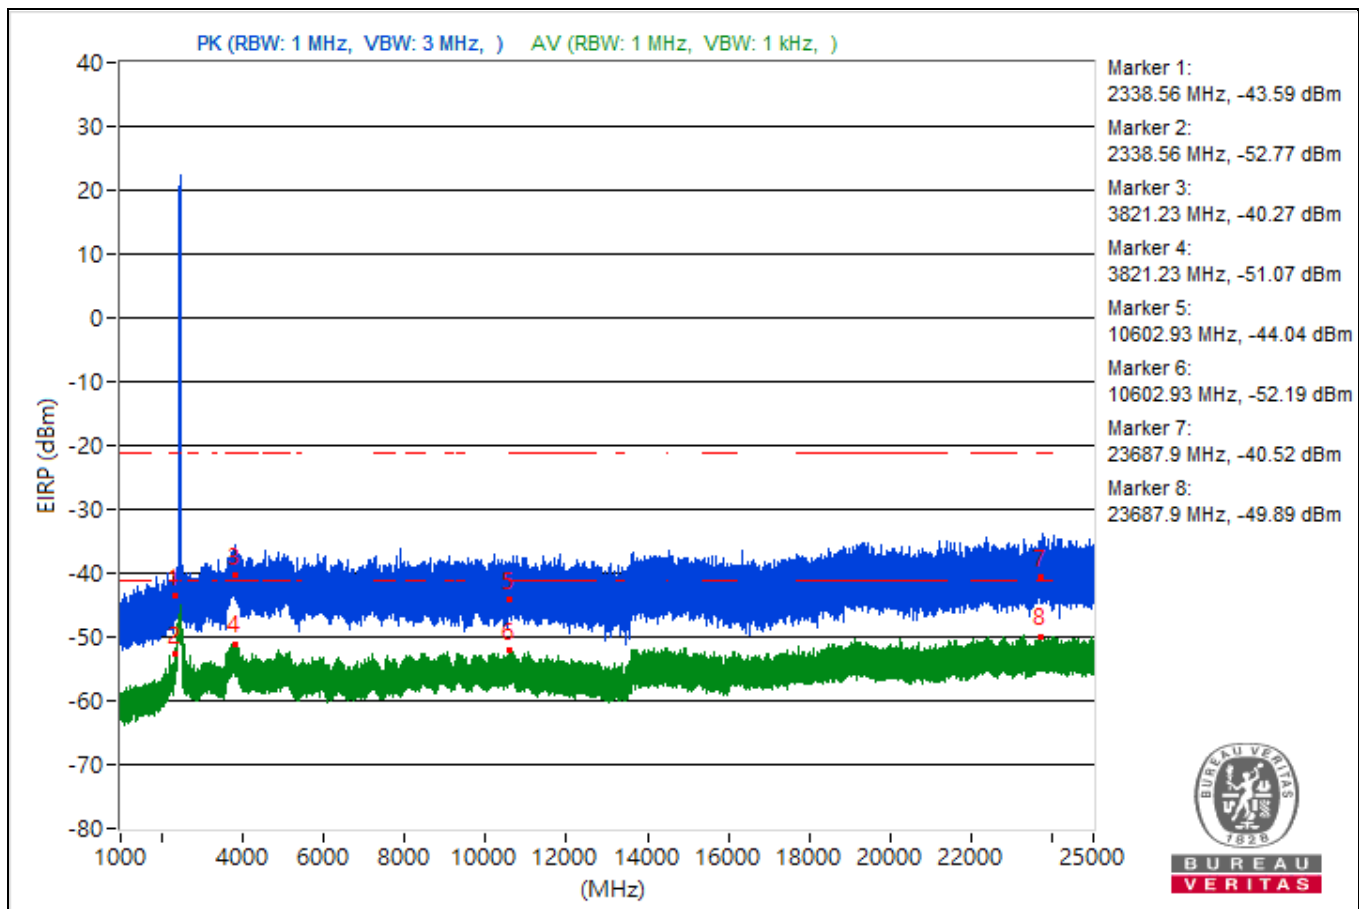

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2227.64	49.73 PK	74	-24.27	-50.45	4.92	-45.53
2	2227.64	43.37 AV	54	-10.63	-56.81	4.92	-51.89
3	4933.92	56.24 PK	74	-17.76	-43.94	4.92	-39.02
4	4933.92	45.11 AV	54	-8.89	-55.07	4.92	-50.15
5	14490.76	54.8 PK	74	-19.2	-45.38	4.92	-40.46
6	14490.76	44 AV	54	-10	-56.18	4.92	-51.26
7	22421.9	57.21 PK	74	-16.79	-42.97	4.92	-38.05
8	22421.9	45.35 AV	54	-8.65	-54.83	4.92	-49.91


Note: Margin value = Emission Level - Limit value

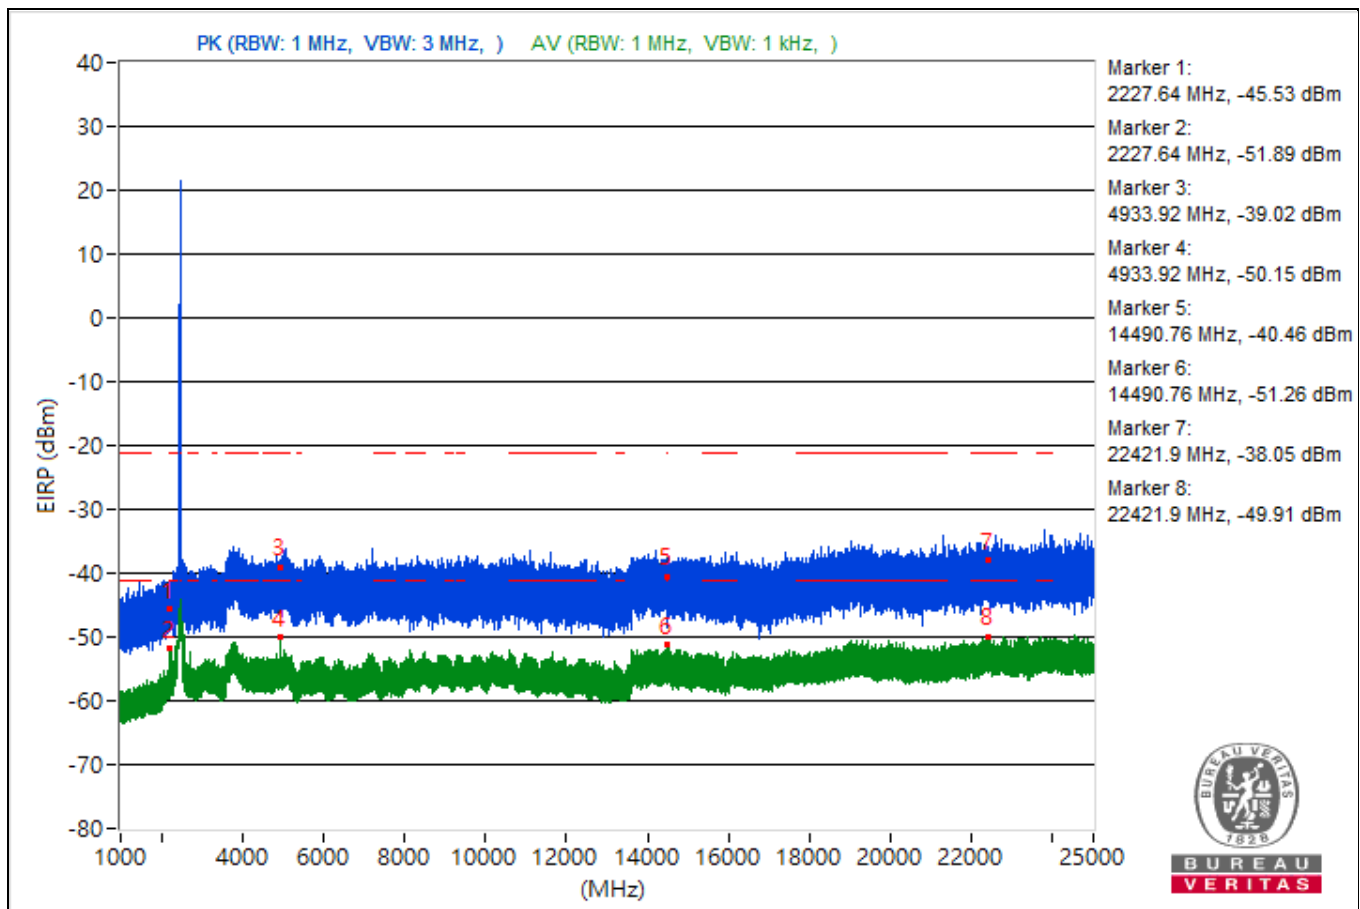

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2231.14	54.18 PK	74	-19.82	-46	4.92	-41.08
2	2231.14	43.52 AV	54	-10.48	-56.66	4.92	-51.74
3	3813.53	54.92 PK	74	-19.08	-45.26	4.92	-40.34
4	3813.53	44.16 AV	54	-9.84	-56.02	4.92	-51.1
5	14484.09	55.97 PK	74	-18.03	-44.21	4.92	-39.29
6	14484.09	43.54 AV	54	-10.46	-56.64	4.92	-51.72
7	19857.5	55.92 PK	74	-18.08	-44.26	4.92	-39.34
8	19857.5	45.25 AV	54	-8.75	-54.93	4.92	-50.01


Note: Margin value = Emission Level - Limit value

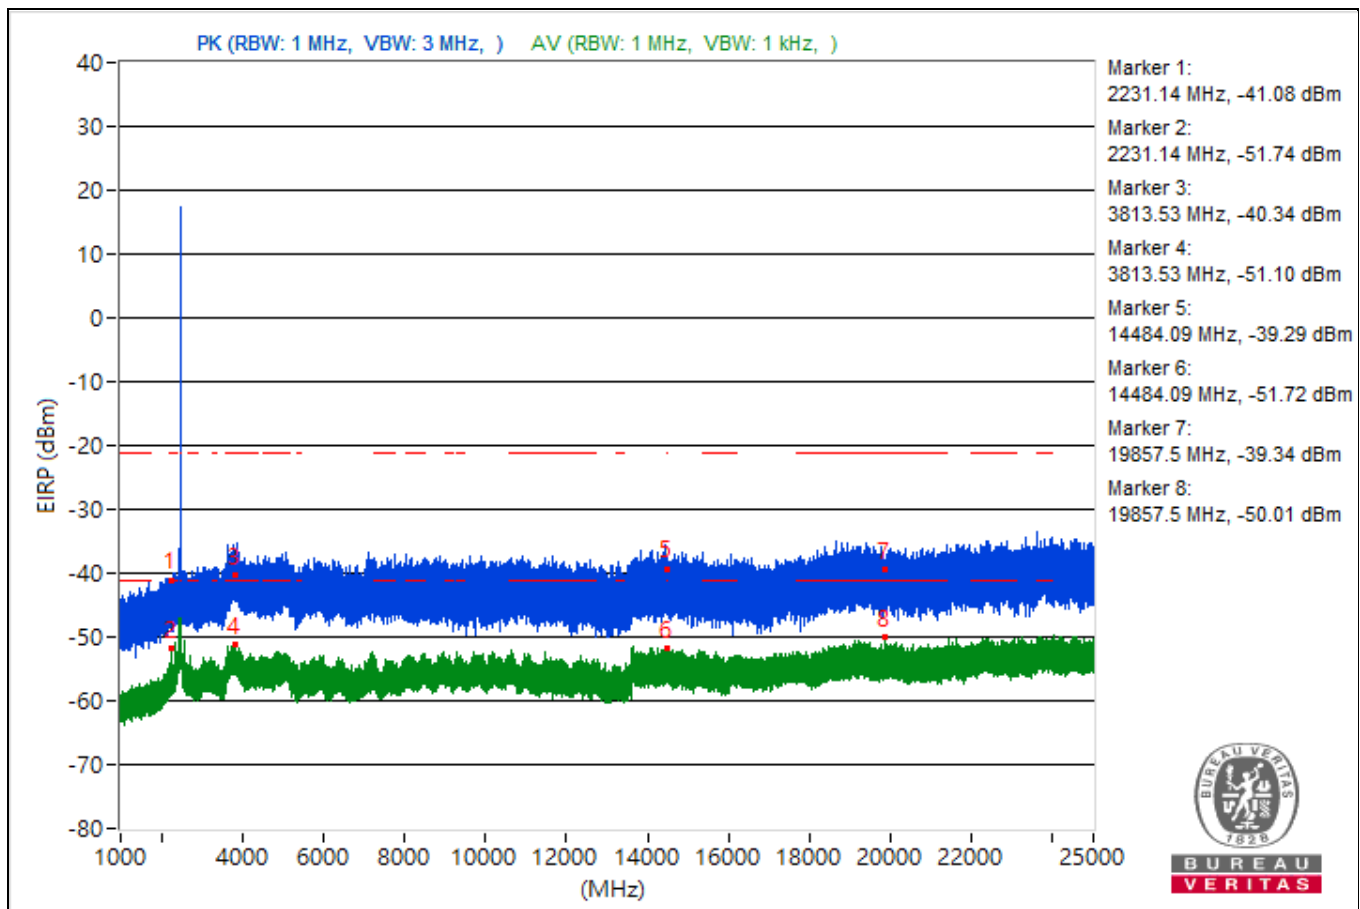

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.57	51.81 PK	74	-22.19	-48.37	4.92	-43.45
2	2339.57	43.55 AV	54	-10.45	-56.63	4.92	-51.71
3	3857.79	53.61 PK	74	-20.39	-46.57	4.92	-41.65
4	3857.79	44.23 AV	54	-9.77	-55.95	4.92	-51.03
5	14482.31	55.56 PK	74	-18.44	-44.62	4.92	-39.7
6	14482.31	43.12 AV	54	-10.88	-57.06	4.92	-52.14
7	23681	56.37 PK	74	-17.63	-43.81	4.92	-38.89
8	23681	45.93 AV	54	-8.07	-54.25	4.92	-49.33


Note: Margin value = Emission Level - Limit value

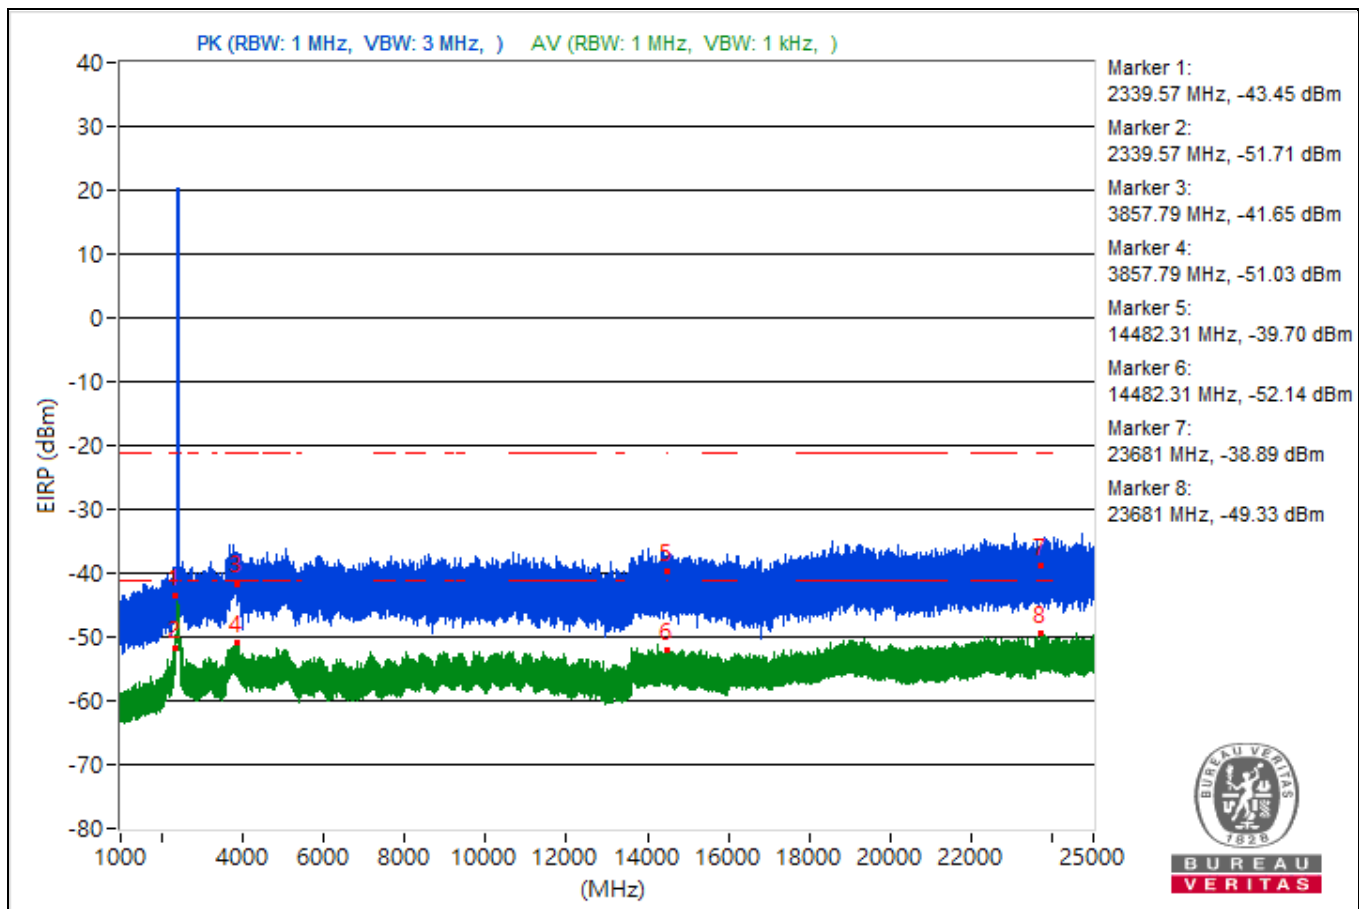

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2319.5	51.41 PK	74	-22.59	-48.77	4.92	-43.85
2	2319.5	43.39 AV	54	-10.61	-56.79	4.92	-51.87
3	3789.27	55.99 PK	74	-18.01	-44.19	4.92	-39.27
4	3789.27	45.26 AV	54	-8.74	-54.92	4.92	-50
5	10962.49	54.52 PK	74	-19.48	-45.66	4.92	-40.74
6	10962.49	43.19 AV	54	-10.81	-56.99	4.92	-52.07
7	23659.6	52.22 PK	74	-21.78	-47.96	4.92	-43.04
8	23659.6	45.98 AV	54	-8.02	-54.2	4.92	-49.28


Note: Margin value = Emission Level - Limit value

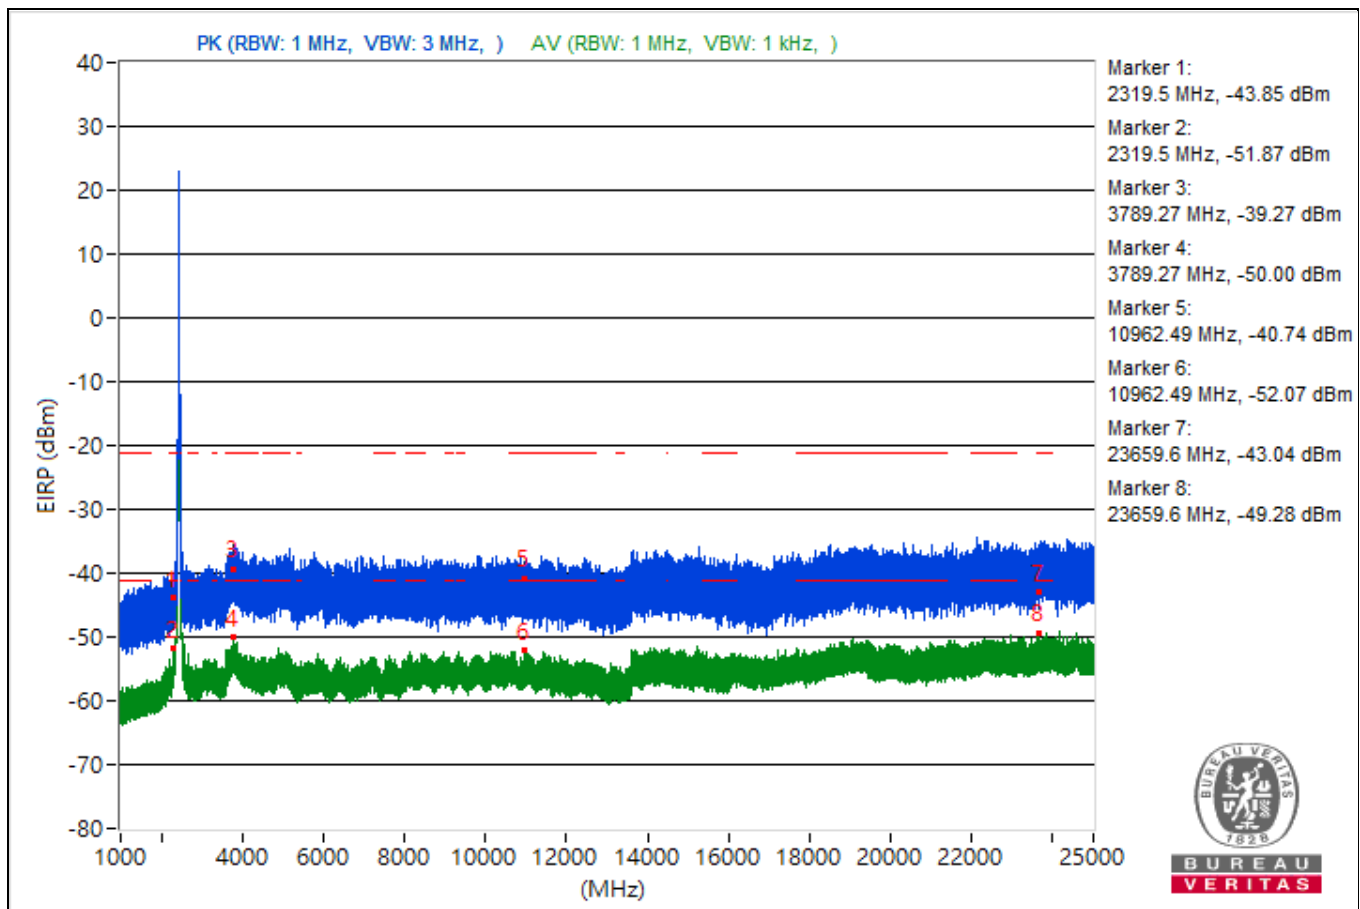

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.24	50.77 PK	74	-23.23	-49.41	4.92	-44.49
2	2338.24	42.95 AV	54	-11.05	-57.23	4.92	-52.31
3	3742.29	55.99 PK	74	-18.01	-44.19	4.92	-39.27
4	3742.29	44.47 AV	54	-9.53	-55.71	4.92	-50.79
5	10966.4	50.92 PK	74	-23.08	-49.26	4.92	-44.34
6	10966.4	43.58 AV	54	-10.42	-56.6	4.92	-51.68
7	23632	58.59 PK	74	-15.41	-41.59	4.92	-36.67
8	23632	45.53 AV	54	-8.47	-54.65	4.92	-49.73


Note: Margin value = Emission Level - Limit value

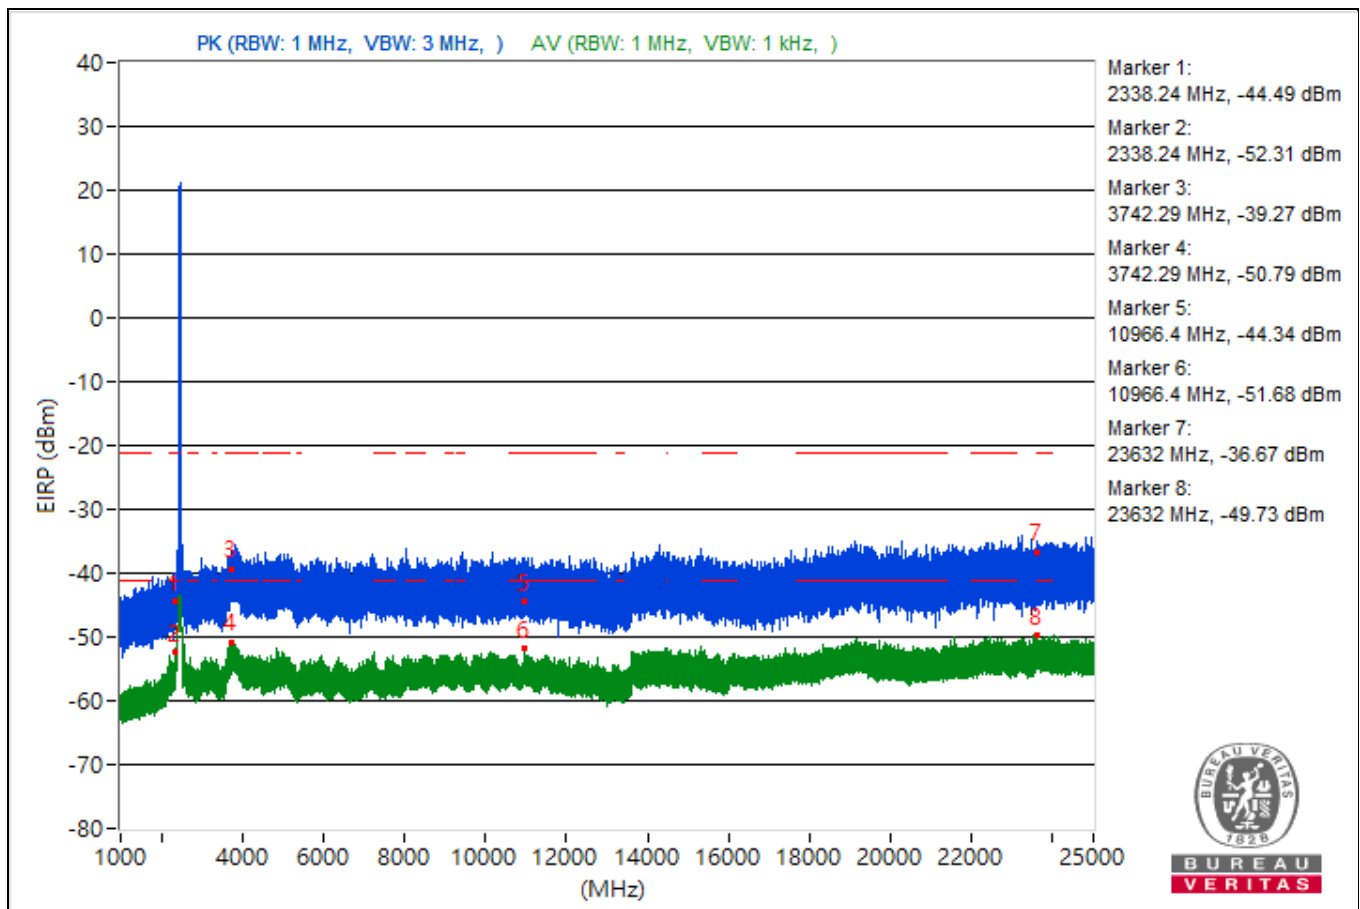

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2227.64	48.97 PK	74	-25.03	-51.21	4.92	-46.29
2	2227.64	42.74 AV	54	-11.26	-57.44	4.92	-52.52
3	3805.91	54.13 PK	74	-19.87	-46.05	4.92	-41.13
4	3805.91	44.79 AV	54	-9.21	-55.39	4.92	-50.47
5	14484.44	52.34 PK	74	-21.66	-47.84	4.92	-42.92
6	14484.44	43.55 AV	54	-10.45	-56.63	4.92	-51.71
7	23965.4	53.67 PK	74	-20.33	-46.51	4.92	-41.59
8	23965.4	45.81 AV	54	-8.19	-54.37	4.92	-49.45


Note: Margin value = Emission Level - Limit value

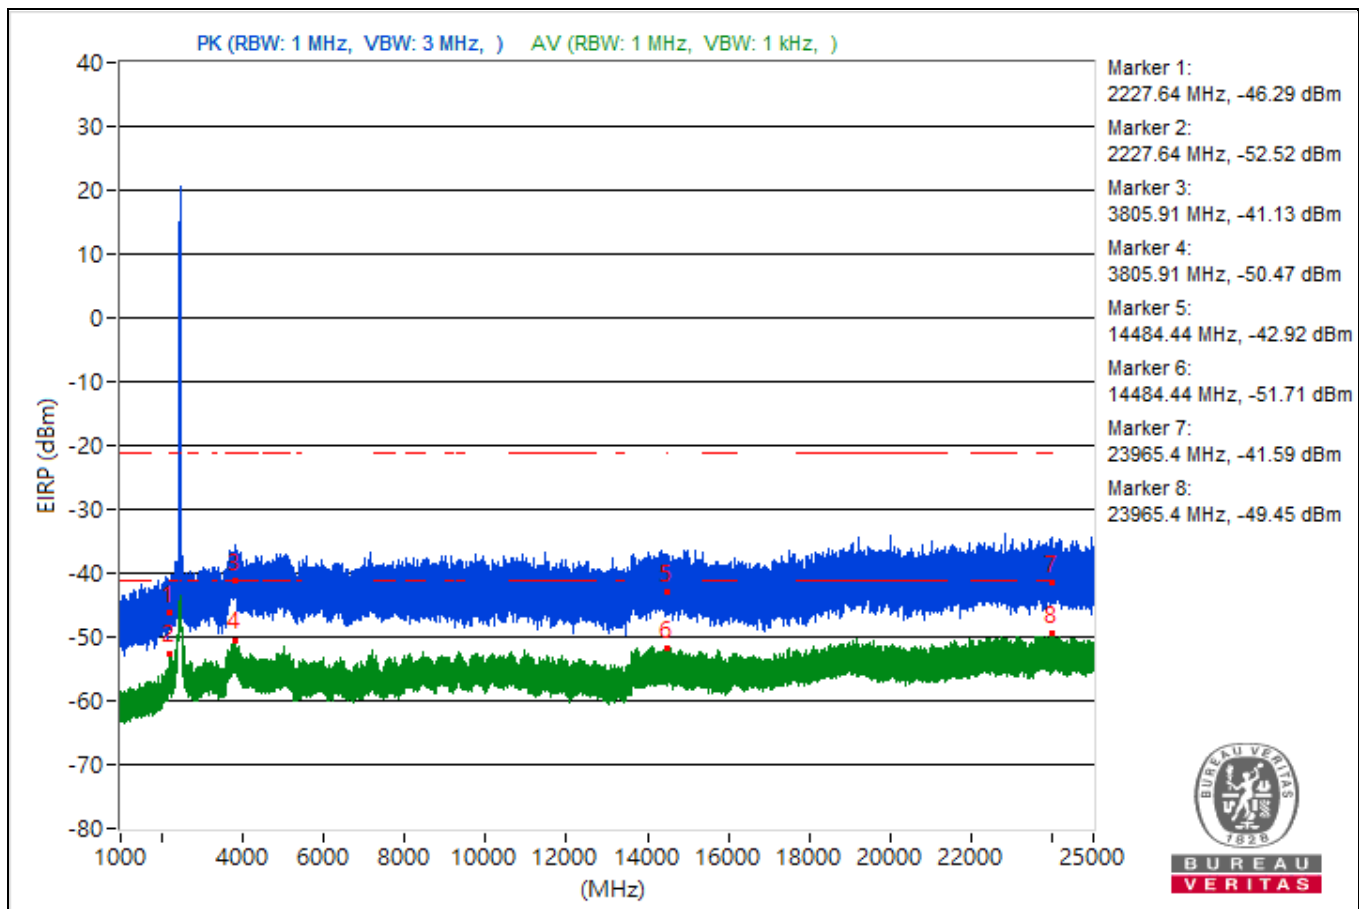

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2233.32	51.65 PK	74	-22.35	-48.53	4.92	-43.61
2	2233.32	42.21 AV	54	-11.79	-57.97	4.92	-53.05
3	3701.69	57.31 PK	74	-16.69	-42.87	4.92	-37.95
4	3701.69	44.08 AV	54	-9.92	-56.1	4.92	-51.18
5	15382.84	53.48 PK	74	-20.52	-46.7	4.92	-41.78
6	15382.84	43.27 AV	54	-10.73	-56.91	4.92	-51.99
7	23811.7	55.33 PK	74	-18.67	-44.85	4.92	-39.93
8	23811.7	45.46 AV	54	-8.54	-54.72	4.92	-49.8


Note: Margin value = Emission Level - Limit value

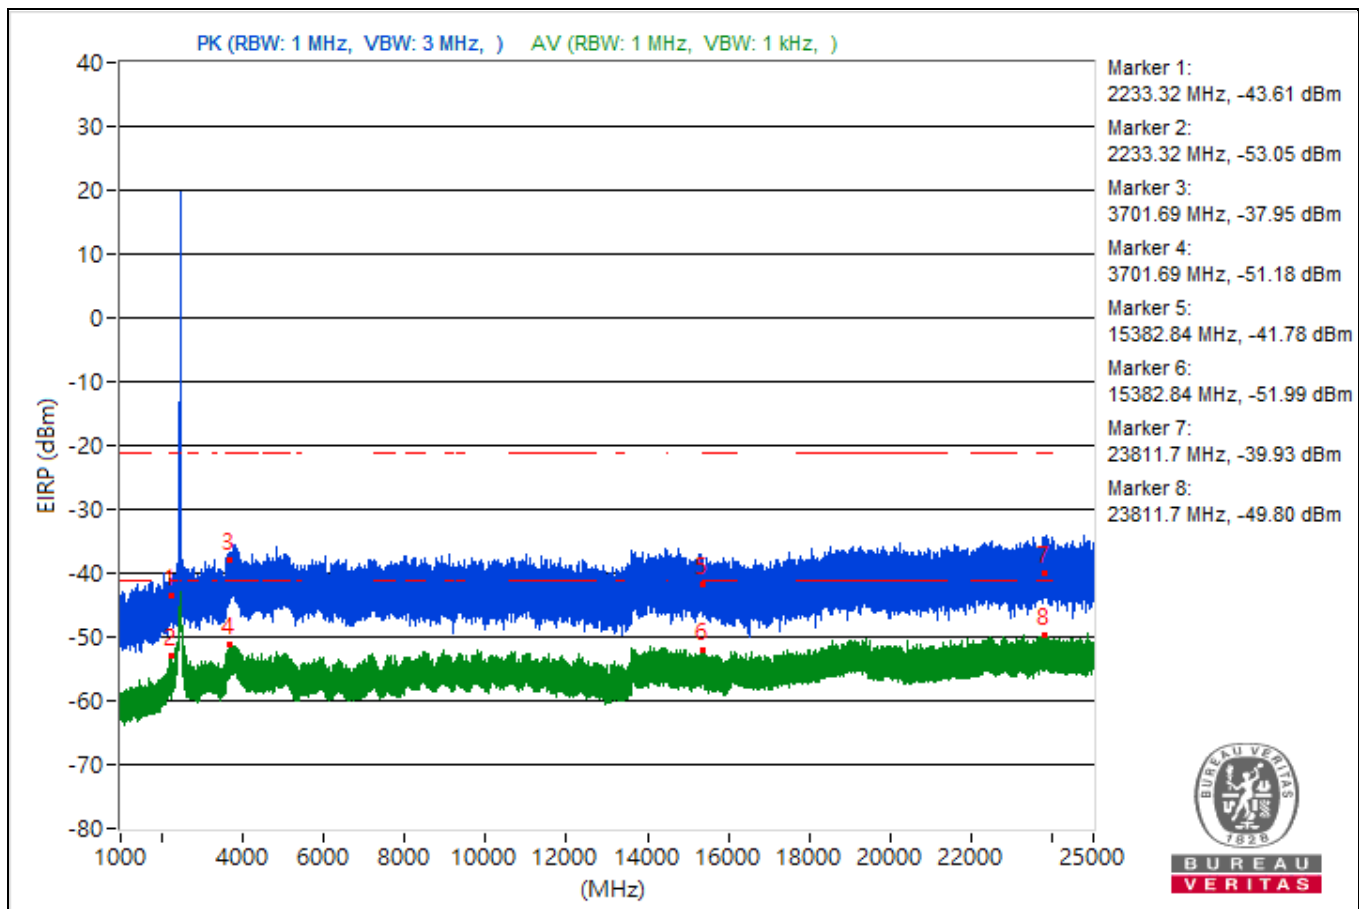

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2291.19	52.82 PK	74	-21.18	-47.36	4.92	-42.44
2	2291.19	43.66 AV	54	-10.34	-56.52	4.92	-51.6
3	3813.53	54.89 PK	74	-19.11	-45.29	4.92	-40.37
4	3813.53	44.17 AV	54	-9.83	-56.01	4.92	-51.09
5	14495.02	55.79 PK	74	-18.21	-44.39	4.92	-39.47
6	14495.02	43.65 AV	54	-10.35	-56.53	4.92	-51.61
7	22364.4	53.27 PK	74	-20.73	-46.91	4.92	-41.99
8	22364.4	45.41 AV	54	-8.59	-54.77	4.92	-49.85


Note: Margin value = Emission Level - Limit value

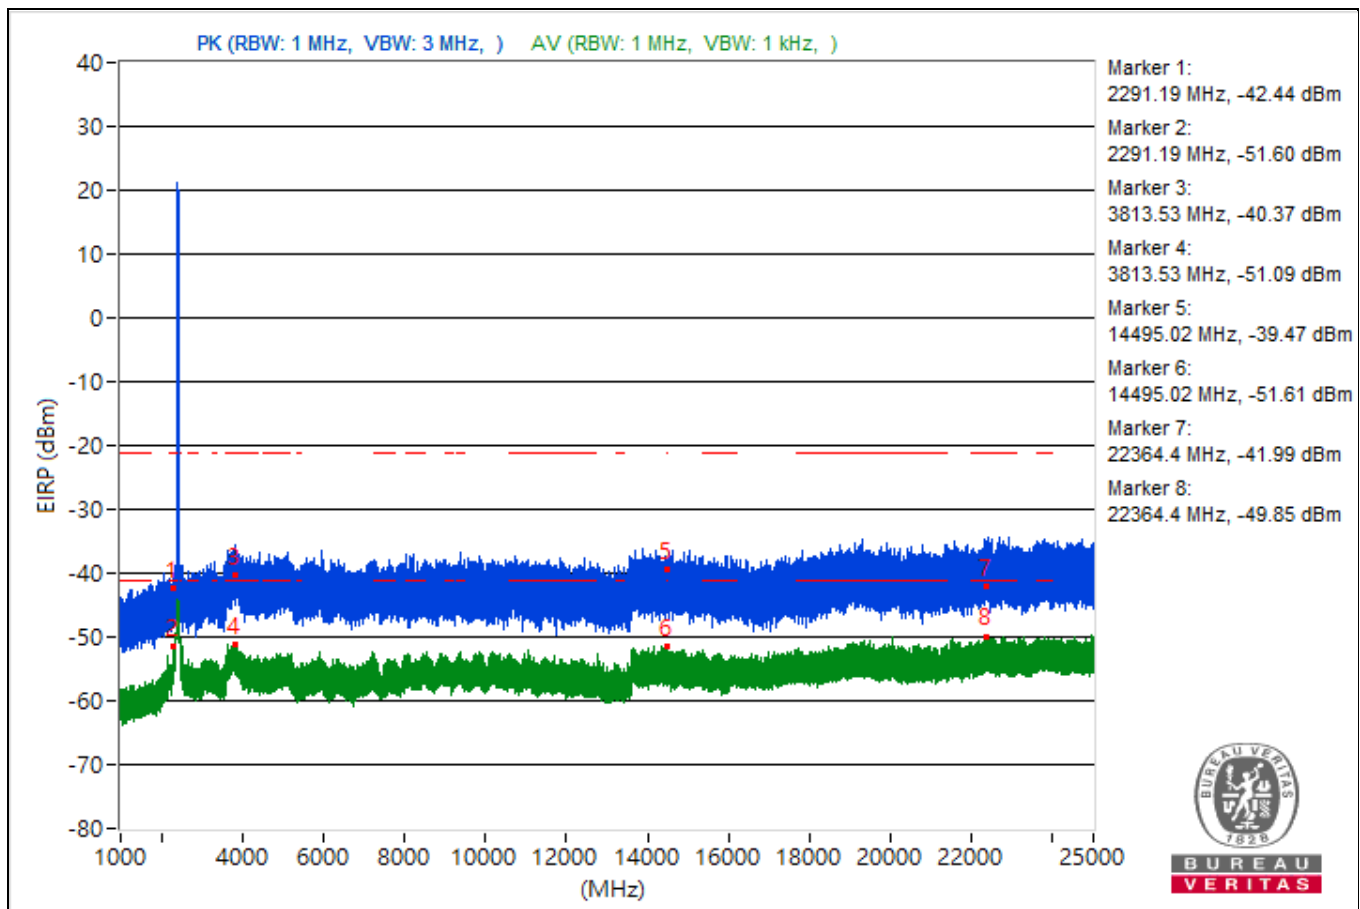

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2321.6	51.44 PK	74	-22.56	-48.74	4.92	-43.82
2	2321.6	43.42 AV	54	-10.58	-56.76	4.92	-51.84
3	3743.07	52.36 PK	74	-21.64	-47.82	4.92	-42.9
4	3743.07	44.16 AV	54	-9.84	-56.02	4.92	-51.1
5	8498.04	54.67 PK	74	-19.33	-45.51	4.92	-40.59
6	8498.04	43.26 AV	54	-10.74	-56.92	4.92	-52
7	22736.5	54.25 PK	74	-19.75	-45.93	4.92	-41.01
8	22736.5	45.65 AV	54	-8.35	-54.53	4.92	-49.61


Note: Margin value = Emission Level - Limit value

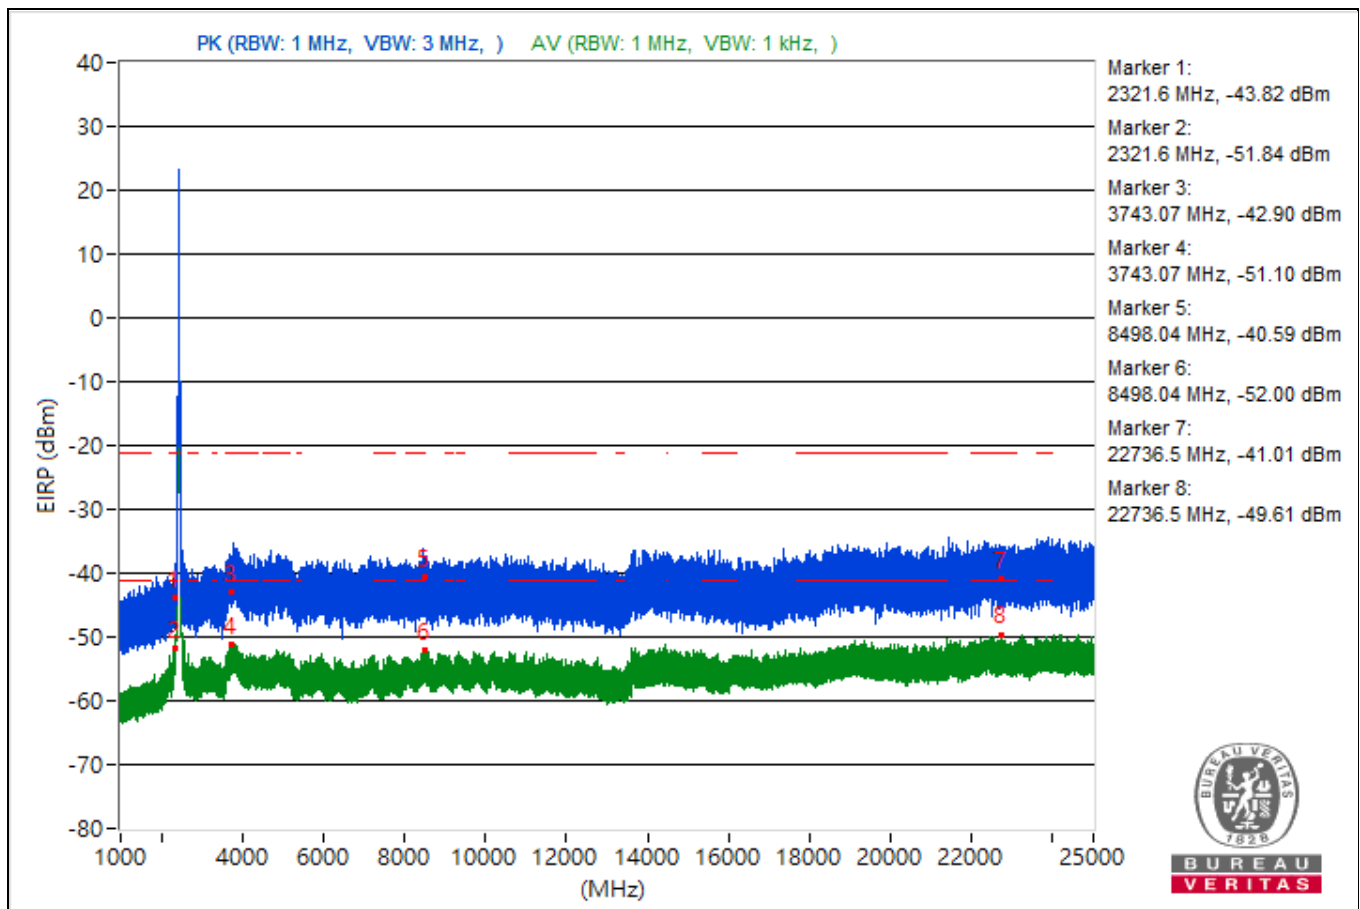

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.79	50.97 PK	74	-23.03	-49.21	4.92	-44.29
2	2338.79	43.39 AV	54	-10.61	-56.79	4.92	-51.87
3	3839.12	55.37 PK	74	-18.63	-44.81	4.92	-39.89
4	3839.12	45 AV	54	-9	-55.18	4.92	-50.26
5	11086.13	53.18 PK	74	-20.82	-47	4.92	-42.08
6	11086.13	43.62 AV	54	-10.38	-56.56	4.92	-51.64
7	23791.9	53.82 PK	74	-20.18	-46.36	4.92	-41.44
8	23791.9	45.7 AV	54	-8.3	-54.48	4.92	-49.56


Note: Margin value = Emission Level - Limit value

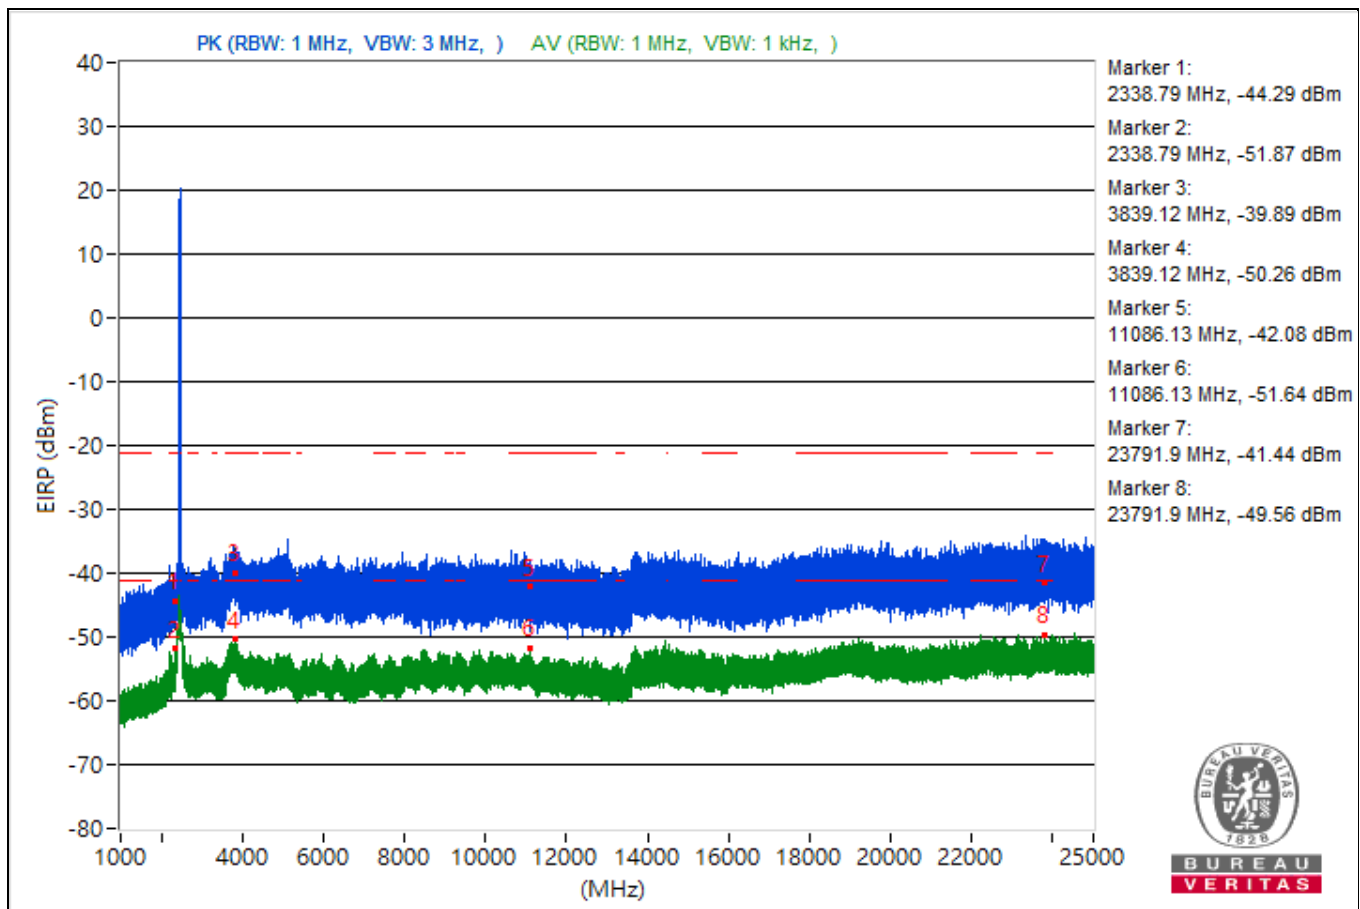

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2227.88	51.42 PK	74	-22.58	-48.76	4.92	-43.84
2	2227.88	42.72 AV	54	-11.28	-57.46	4.92	-52.54
3	3752.01	53.78 PK	74	-20.22	-46.4	4.92	-41.48
4	3752.01	44.39 AV	54	-9.61	-55.79	4.92	-50.87
5	9415.64	54.35 PK	74	-19.65	-45.83	4.92	-40.91
6	9415.64	43.38 AV	54	-10.62	-56.8	4.92	-51.88
7	22816.7	56.24 PK	74	-17.76	-43.94	4.92	-39.02
8	22816.7	45.66 AV	54	-8.34	-54.52	4.92	-49.6


Note: Margin value = Emission Level - Limit value

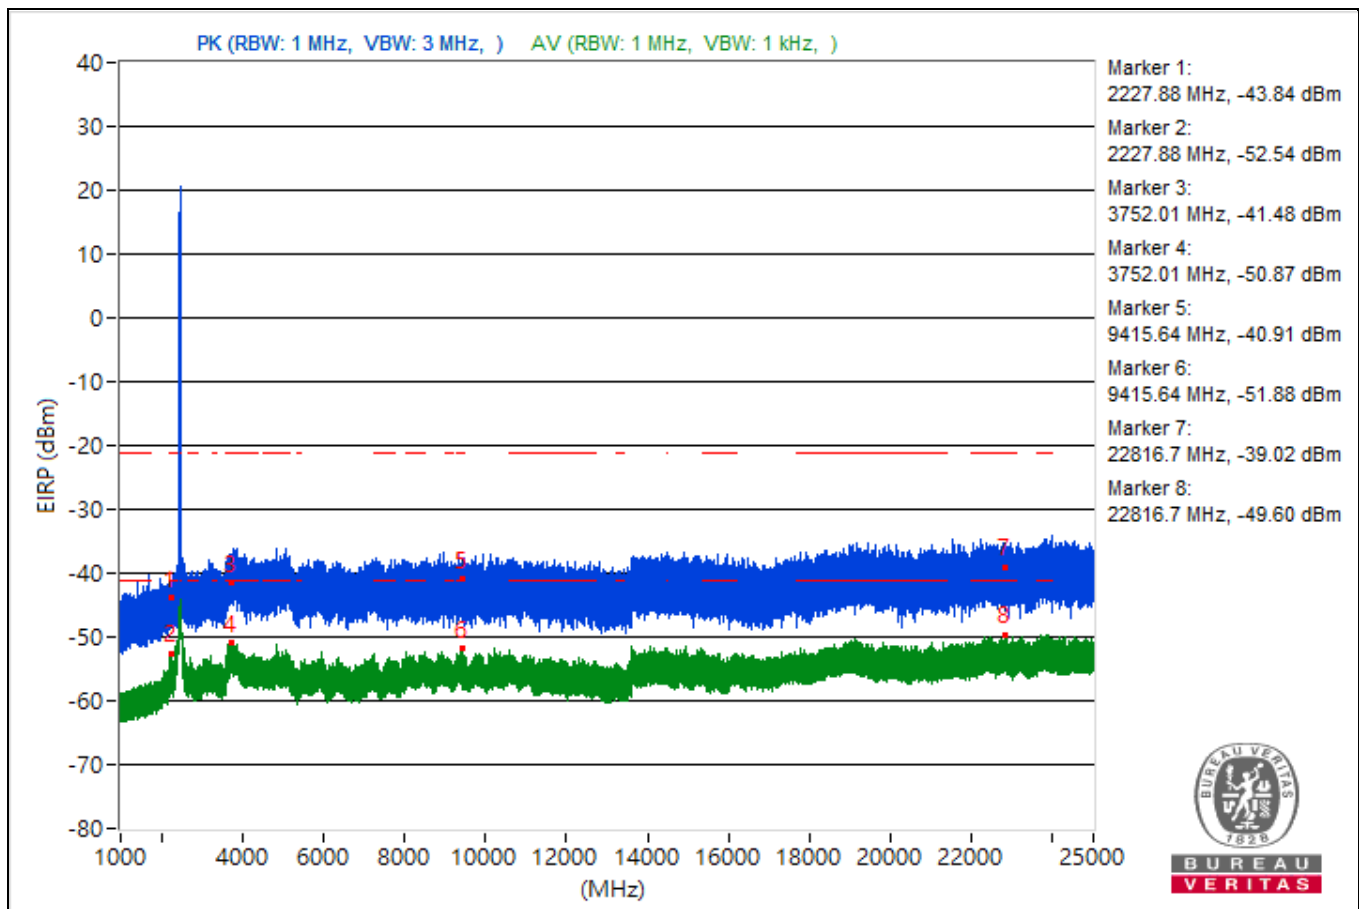

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2232.86	51.72 PK	74	-22.28	-48.46	4.92	-43.54
2	2232.86	43.01 AV	54	-10.99	-57.17	4.92	-52.25
3	3782.81	55.4 PK	74	-18.6	-44.78	4.92	-39.86
4	3782.81	44.36 AV	54	-9.64	-55.82	4.92	-50.9
5	14480.44	55.07 PK	74	-18.93	-45.11	4.92	-40.19
6	14480.44	43.45 AV	54	-10.55	-56.73	4.92	-51.81
7	22814.4	56.32 PK	74	-17.68	-43.86	4.92	-38.94
8	22814.4	45.98 AV	54	-8.02	-54.2	4.92	-49.28


Note: Margin value = Emission Level - Limit value

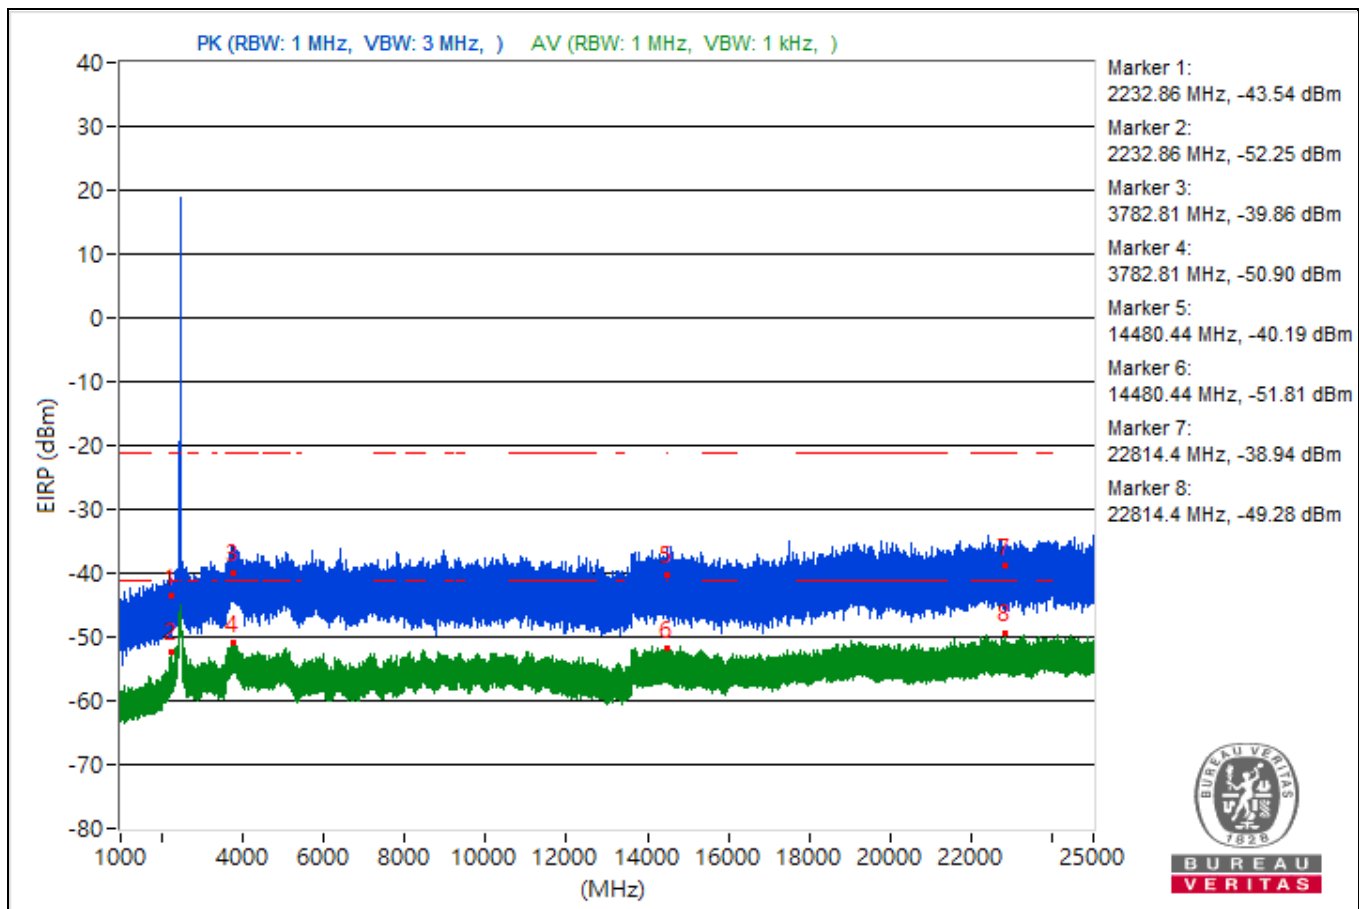

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.31	53.55 PK	74	-20.45	-46.63	4.92	-41.71
2	2337.31	44.51 AV	54	-9.49	-55.67	4.92	-50.75
3	3798.52	55.36 PK	74	-18.64	-44.82	4.92	-39.9
4	3798.52	44.08 AV	54	-9.92	-56.1	4.92	-51.18
5	14478.13	55.58 PK	74	-18.42	-44.6	4.92	-39.68
6	14478.13	43.21 AV	54	-10.79	-56.97	4.92	-52.05
7	23822.1	53.26 PK	74	-20.74	-46.92	4.92	-42
8	23822.1	45.8 AV	54	-8.2	-54.38	4.92	-49.46


Note: Margin value = Emission Level - Limit value

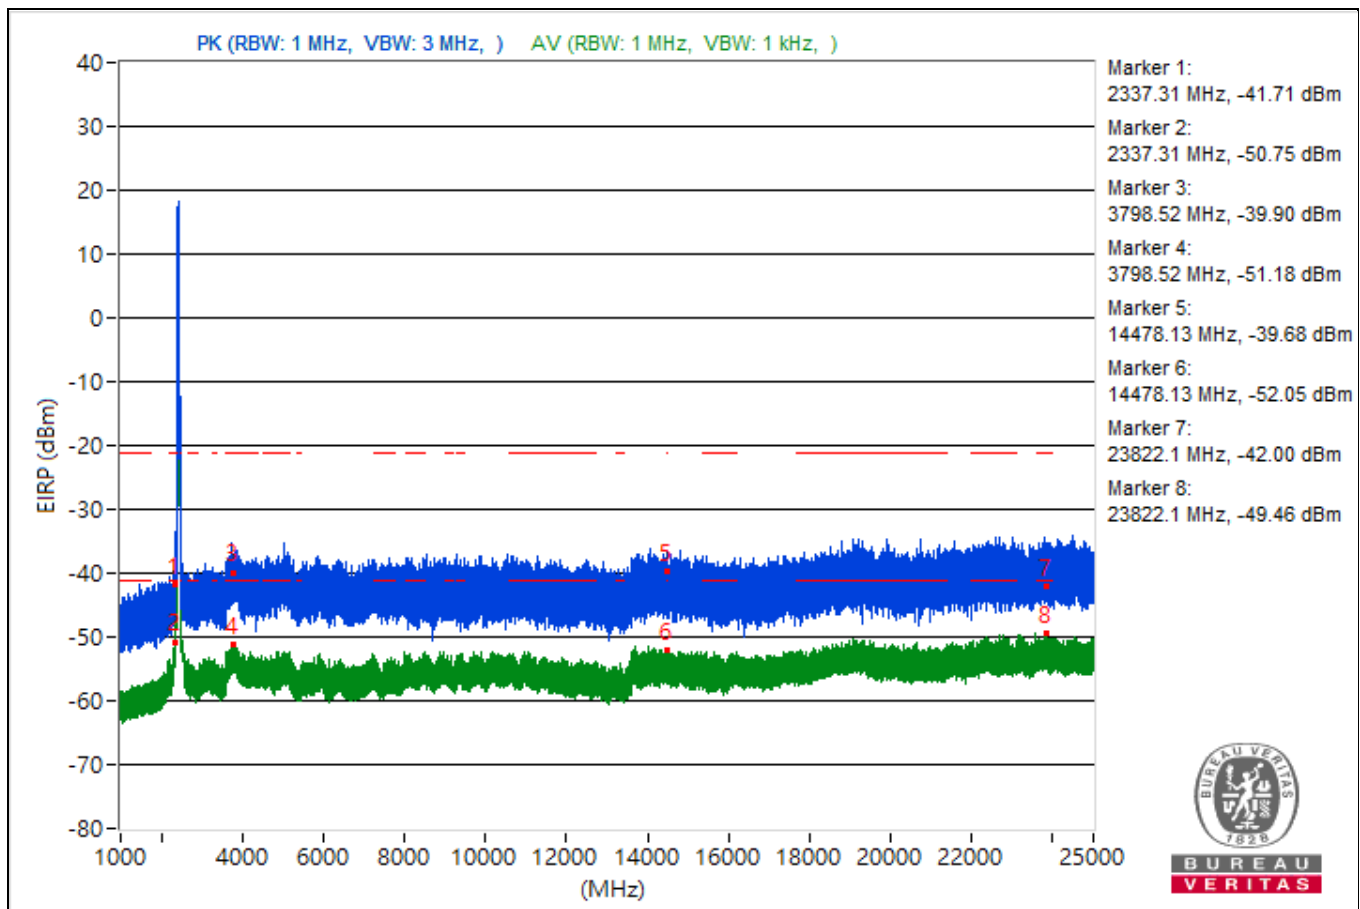

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.33	50.13 PK	74	-23.87	-50.05	4.92	-45.13
2	2339.33	44.19 AV	54	-9.81	-55.99	4.92	-51.07
3	3807.7	53.95 PK	74	-20.05	-46.23	4.92	-41.31
4	3807.7	44.51 AV	54	-9.49	-55.67	4.92	-50.75
5	14494.04	55.45 PK	74	-18.55	-44.73	4.92	-39.81
6	14494.04	43.8 AV	54	-10.2	-56.38	4.92	-51.46
7	22410.4	55.6 PK	74	-18.4	-44.58	4.92	-39.66
8	22410.4	45.55 AV	54	-8.45	-54.63	4.92	-49.71


Note: Margin value = Emission Level - Limit value

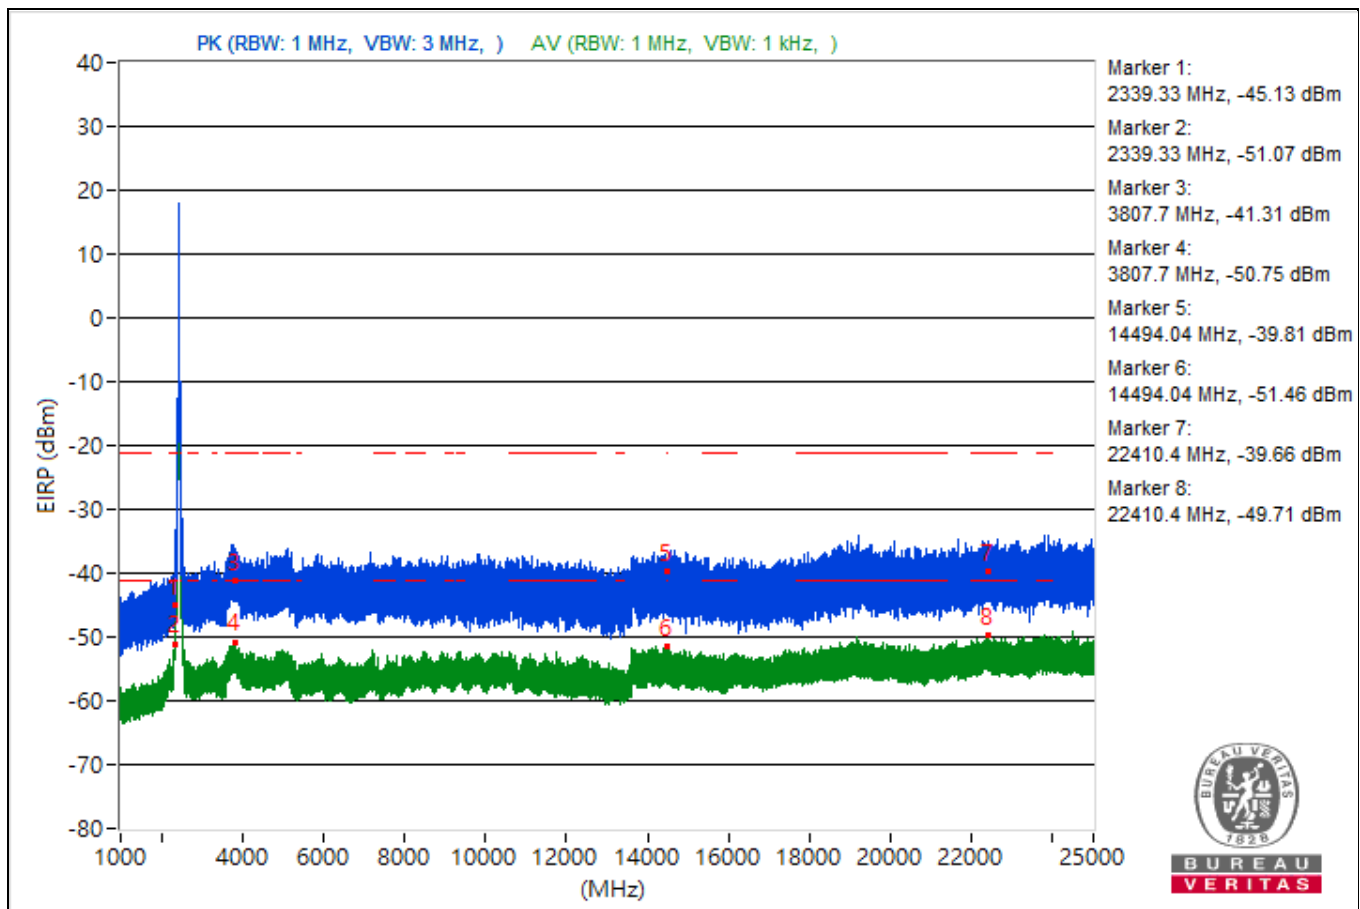

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2334.67	51.59 PK	74	-22.41	-48.59	4.92	-43.67
2	2334.67	43.34 AV	54	-10.66	-56.84	4.92	-51.92
3	3825.9	56.79 PK	74	-17.21	-43.39	4.92	-38.47
4	3825.9	44.54 AV	54	-9.46	-55.64	4.92	-50.72
5	14482.67	56.47 PK	74	-17.53	-43.71	4.92	-38.79
6	14482.67	43.34 AV	54	-10.66	-56.84	4.92	-51.92
7	23692.5	55.36 PK	74	-18.64	-44.82	4.92	-39.9
8	23692.5	45.78 AV	54	-8.22	-54.4	4.92	-49.48


Note: Margin value = Emission Level - Limit value

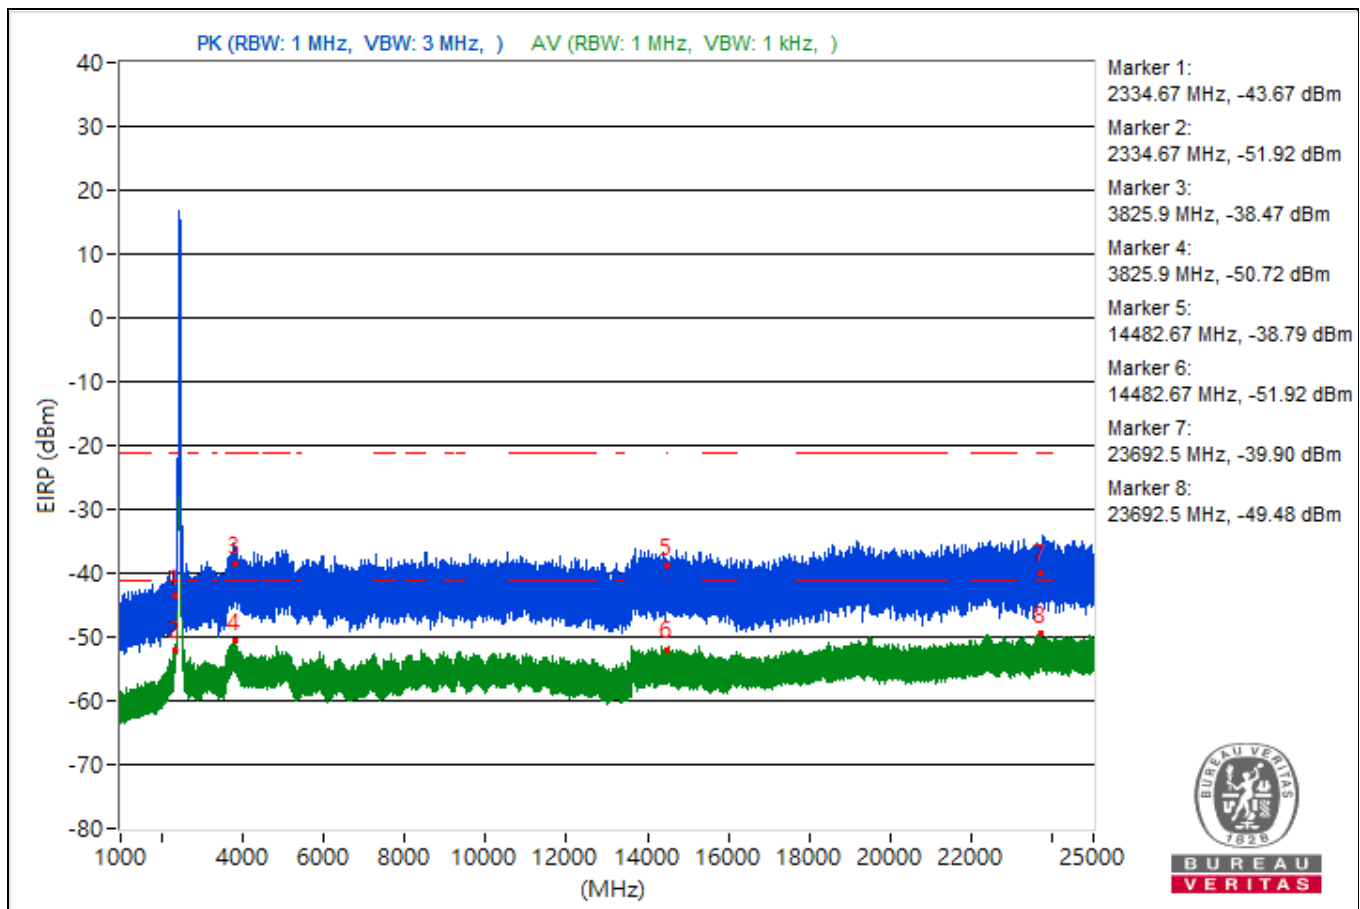

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry HSU		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.94	52.76 PK	74	-21.24	-47.42	4.92	-42.5
2	2338.94	42.89 AV	54	-11.11	-57.29	4.92	-52.37
3	3790.51	57.27 PK	74	-16.73	-42.91	4.92	-37.99
4	3790.51	45.14 AV	54	-8.86	-55.04	4.92	-50.12
5	15370.67	52.89 PK	74	-21.11	-47.29	4.92	-42.37
6	15370.67	43.18 AV	54	-10.82	-57	4.92	-52.08
7	22417.1	56.94 PK	74	-17.06	-43.24	4.92	-38.32
8	22417.1	45.8 AV	54	-8.2	-54.38	4.92	-49.46


Note: Margin value = Emission Level - Limit value

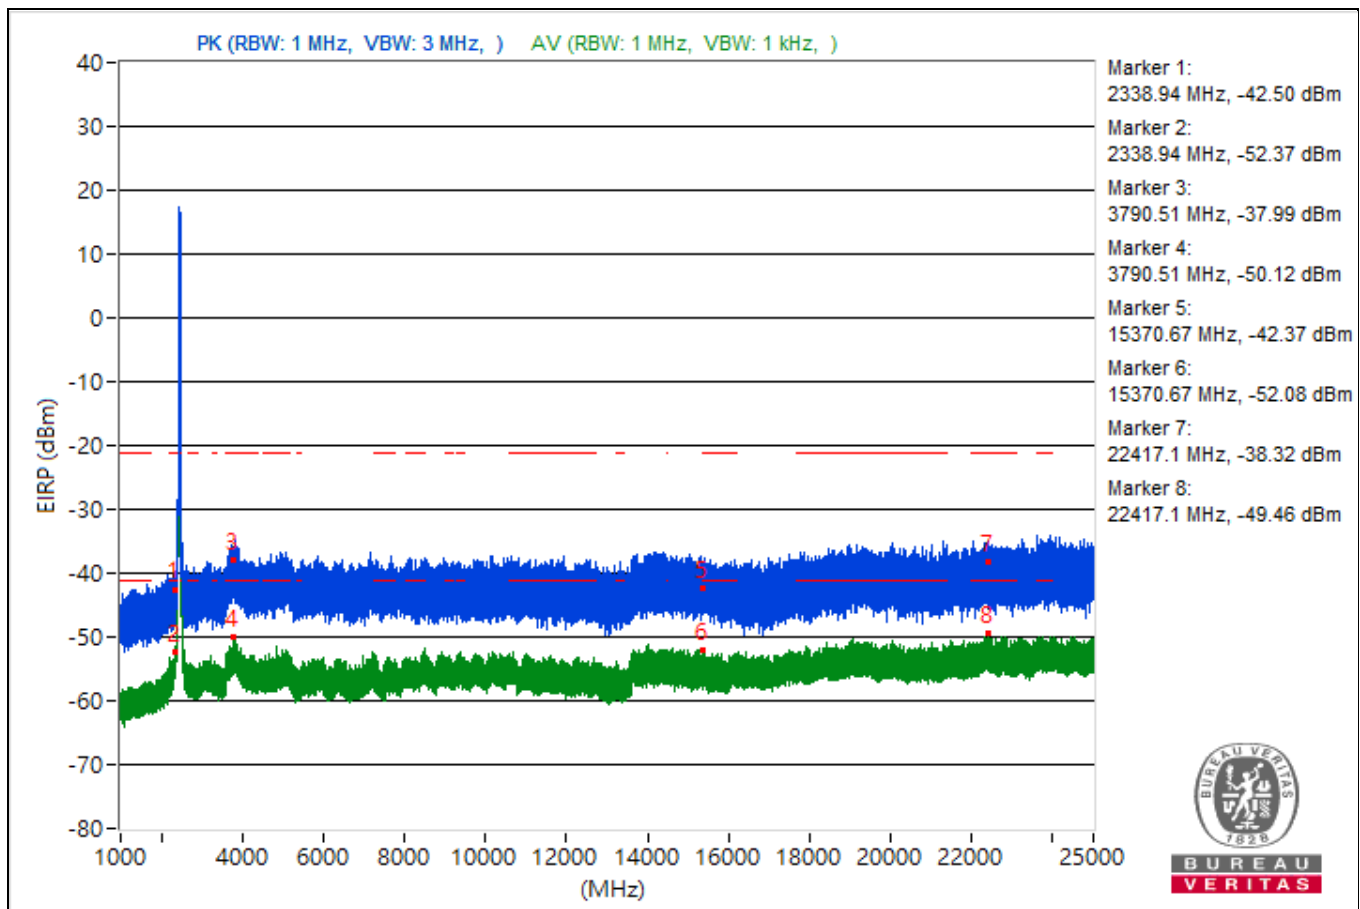

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.7	50.86 PK	74	-23.14	-49.32	4.92	-44.4
2	2337.7	42.63 AV	54	-11.37	-57.55	4.92	-52.63
3	3768.97	54.31 PK	74	-19.69	-45.87	4.92	-40.95
4	3768.97	44.28 AV	54	-9.72	-55.9	4.92	-50.98
5	15702.76	52.54 PK	74	-21.46	-47.64	4.92	-42.72
6	15702.76	43.38 AV	54	-10.62	-56.8	4.92	-51.88
7	23874	54.39 PK	74	-19.61	-45.79	4.92	-40.87
8	23874	45.59 AV	54	-8.41	-54.59	4.92	-49.67


Note: Margin value = Emission Level - Limit value

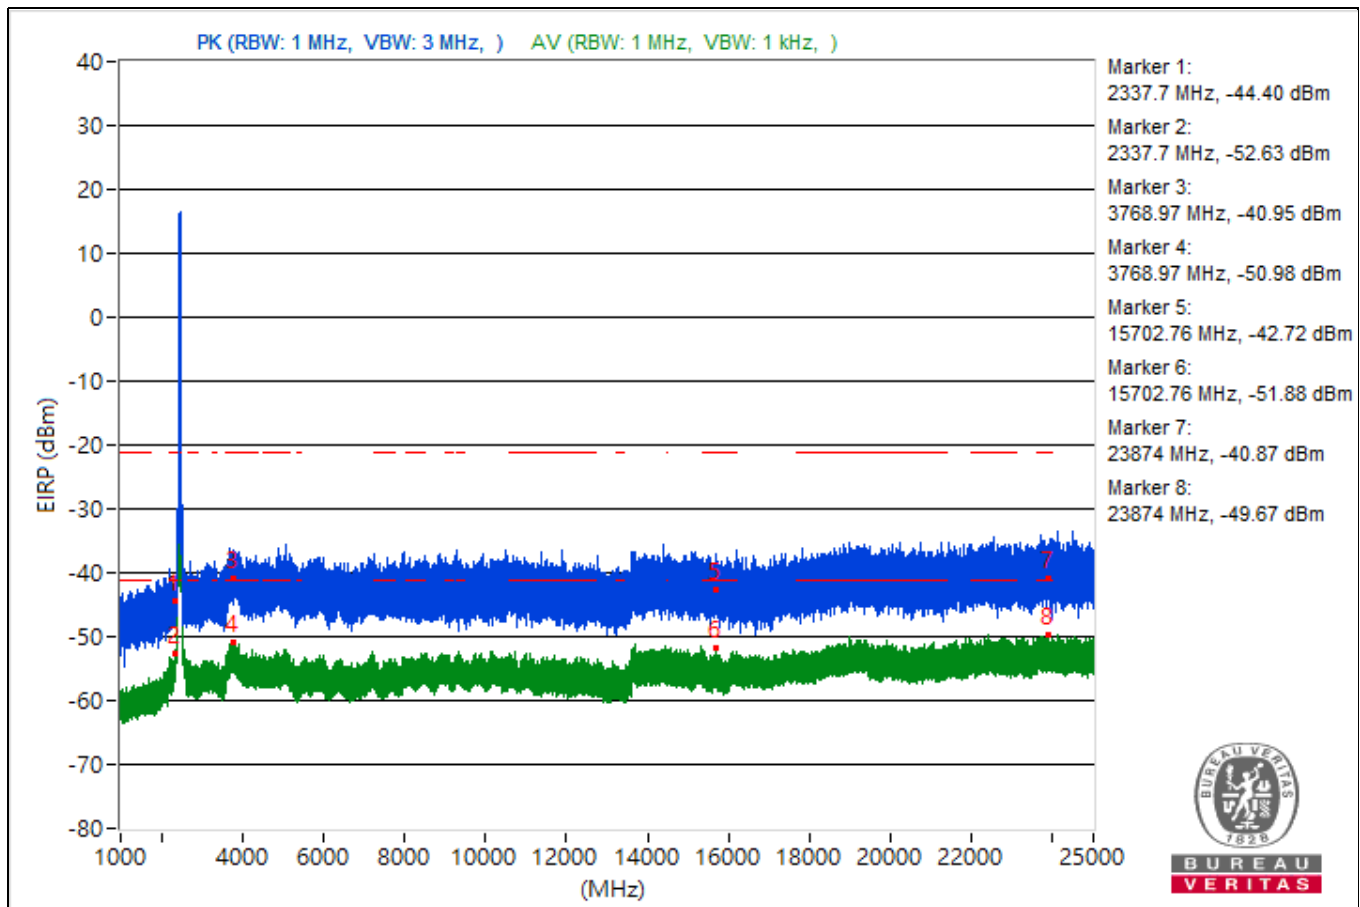

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2283.33	53.71 PK	74	-20.29	-46.47	4.92	-41.55
2	2283.33	46.4 AV	54	-7.6	-53.78	4.92	-48.86
3	4806.52	48.55 PK	74	-25.45	-51.63	4.92	-46.71
4	4806.52	41.22 AV	54	-12.78	-58.96	4.92	-54.04
5	14470.49	50 PK	74	-24	-50.18	4.92	-45.26
6	14470.49	38.75 AV	54	-15.25	-61.43	4.92	-56.51
7	23830.9	52.88 PK	74	-21.12	-47.3	4.92	-42.38
8	23830.9	40.03 AV	54	-13.97	-60.15	4.92	-55.23


Note: Margin value = Emission Level - Limit value

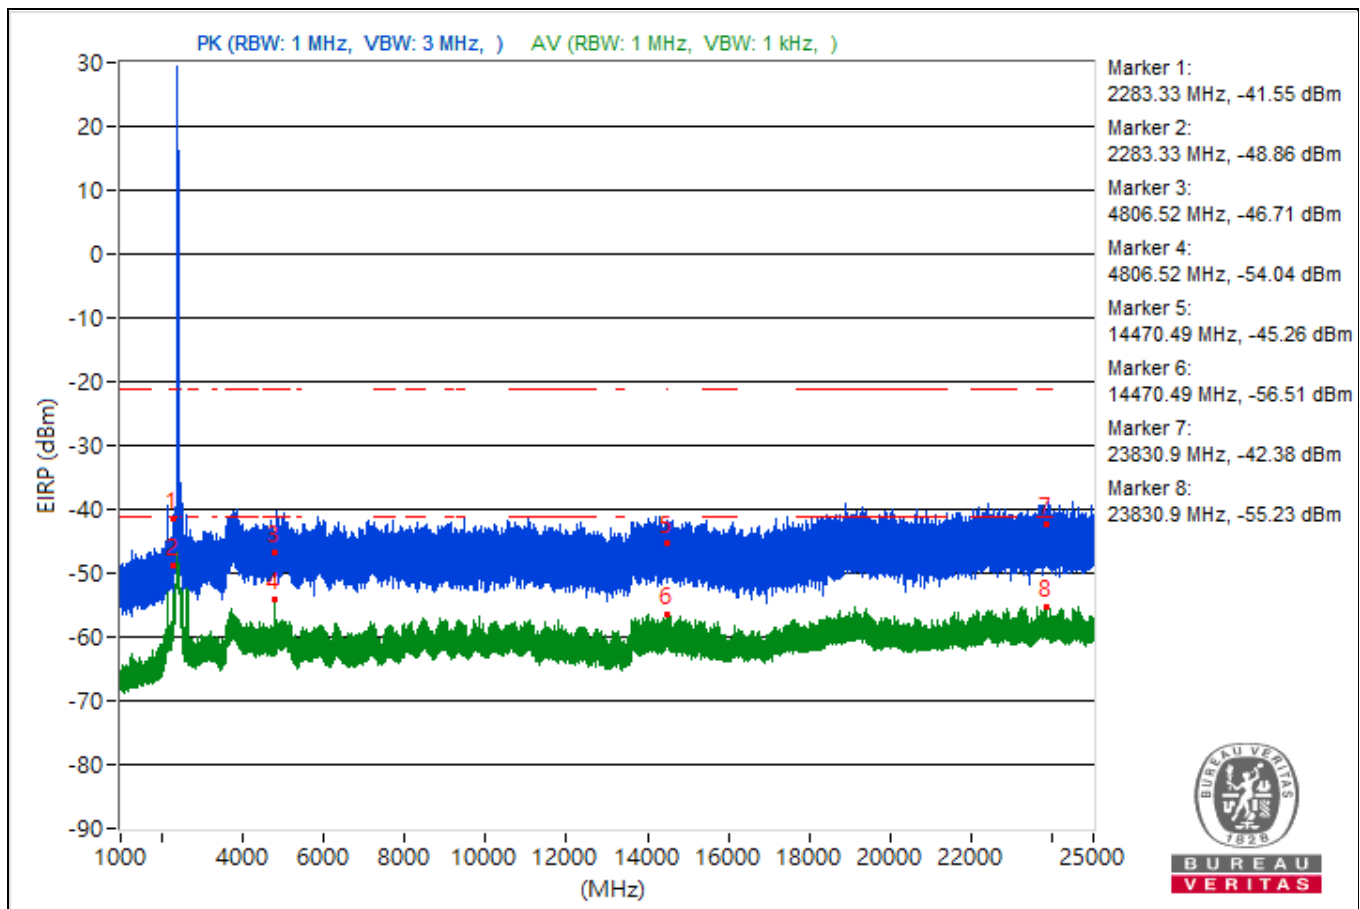

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2310.01	50.25 PK	74	-23.75	-49.93	4.92	-45.01
2	2310.01	40.94 AV	54	-13.06	-59.24	4.92	-54.32
3	4856.92	52.95 PK	74	-21.05	-47.23	4.92	-42.31
4	4856.92	43.05 AV	54	-10.95	-57.13	4.92	-52.21
5	14480.18	50.01 PK	74	-23.99	-50.17	4.92	-45.25
6	14480.18	38.52 AV	54	-15.48	-61.66	4.92	-56.74
7	19110.4	51.69 PK	74	-22.31	-48.49	4.92	-43.57
8	19110.4	40.38 AV	54	-13.62	-59.8	4.92	-54.88


Note: Margin value = Emission Level - Limit value

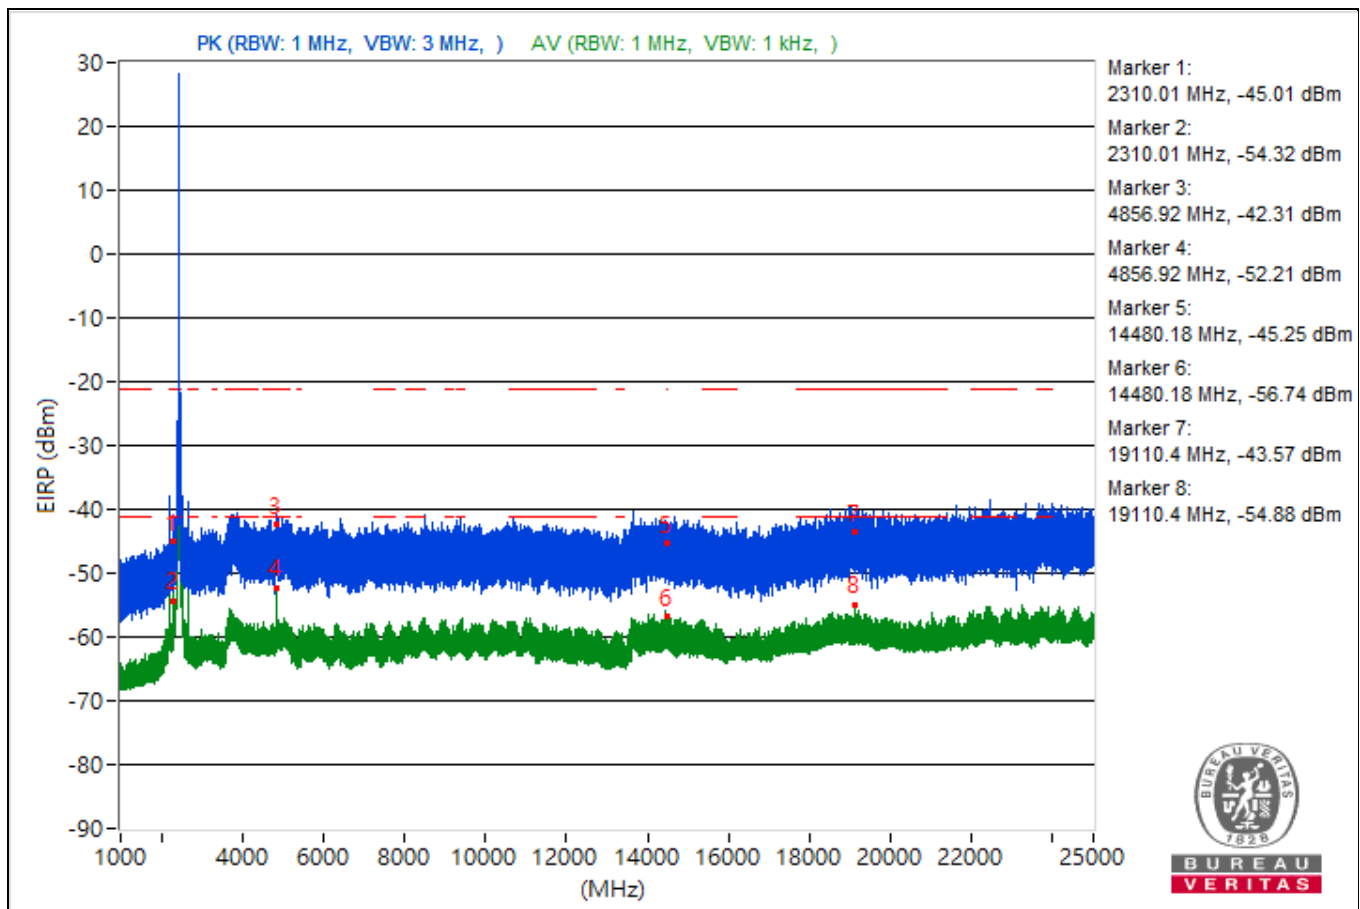

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2230.68	56.83 PK	74	-17.17	-43.35	4.92	-38.43
2	2230.68	50.26 AV	54	-3.74	-49.92	4.92	-45
3	2710.57	54.33 PK	74	-19.67	-45.85	4.92	-40.93
4	2710.57	48.72 AV	54	-5.28	-51.46	4.92	-46.54
5	14488.62	46.68 PK	74	-27.32	-53.5	4.92	-48.58
6	14488.62	38.83 AV	54	-15.17	-61.35	4.92	-56.43
7	23786.5	53 PK	74	-21	-47.18	4.92	-42.26
8	23786.5	40.17 AV	54	-13.83	-60.01	4.92	-55.09


Note: Margin value = Emission Level - Limit value

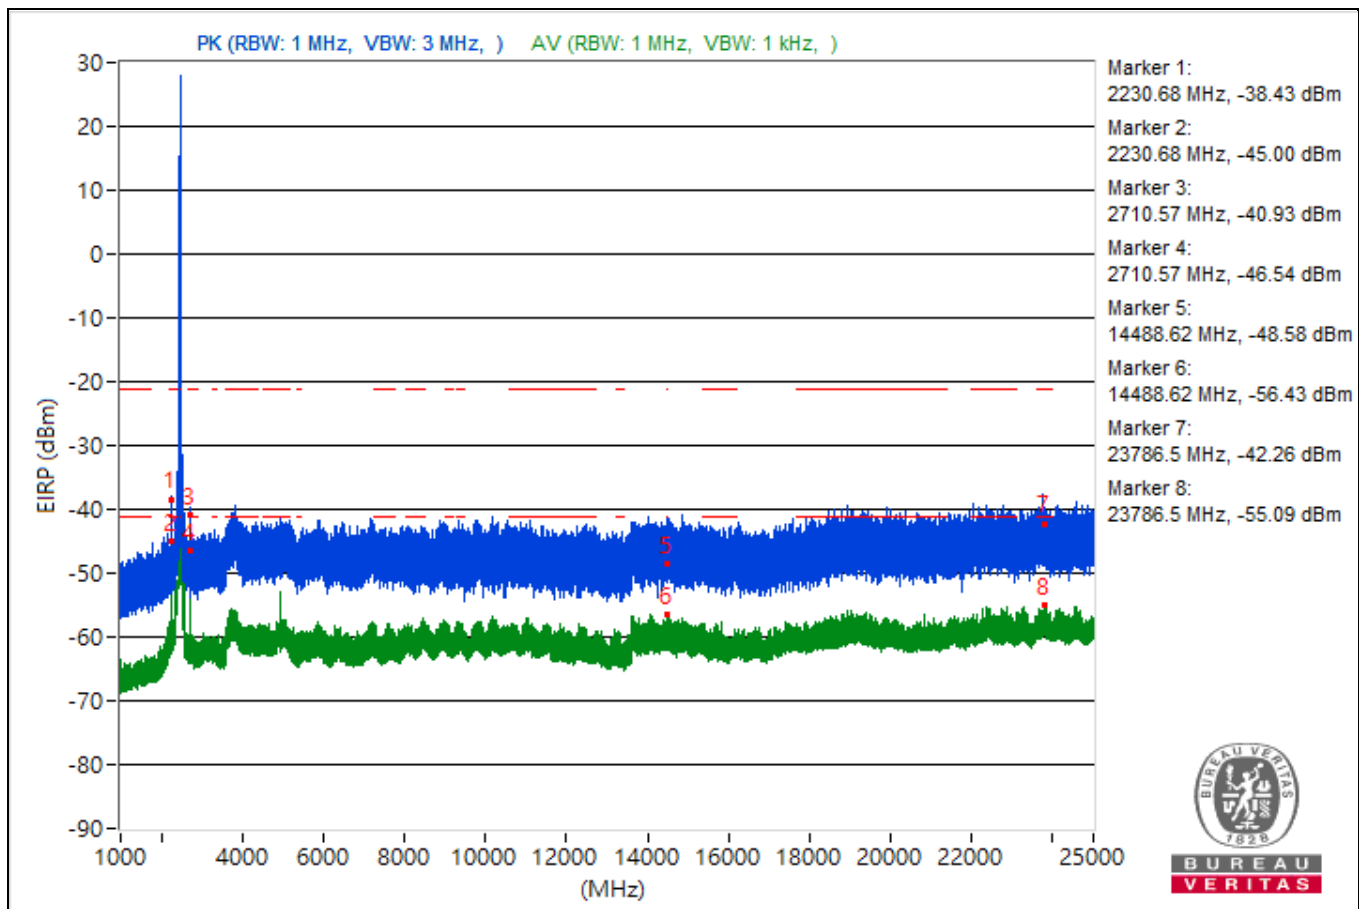

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2235.34	56.12 PK	74	-17.88	-44.06	4.92	-39.14
2	2235.34	50.34 AV	54	-3.66	-49.84	4.92	-44.92
3	2715.08	56.55 PK	74	-17.45	-43.63	4.92	-38.71
4	2715.08	47.99 AV	54	-6.01	-52.19	4.92	-47.27
5	9315.82	50.09 PK	74	-23.91	-50.09	4.92	-45.17
6	9315.82	37.95 AV	54	-16.05	-62.23	4.92	-57.31
7	22428.3	51.35 PK	74	-22.65	-48.83	4.92	-43.91
8	22428.3	40.58 AV	54	-13.42	-59.6	4.92	-54.68


Note: Margin value = Emission Level - Limit value

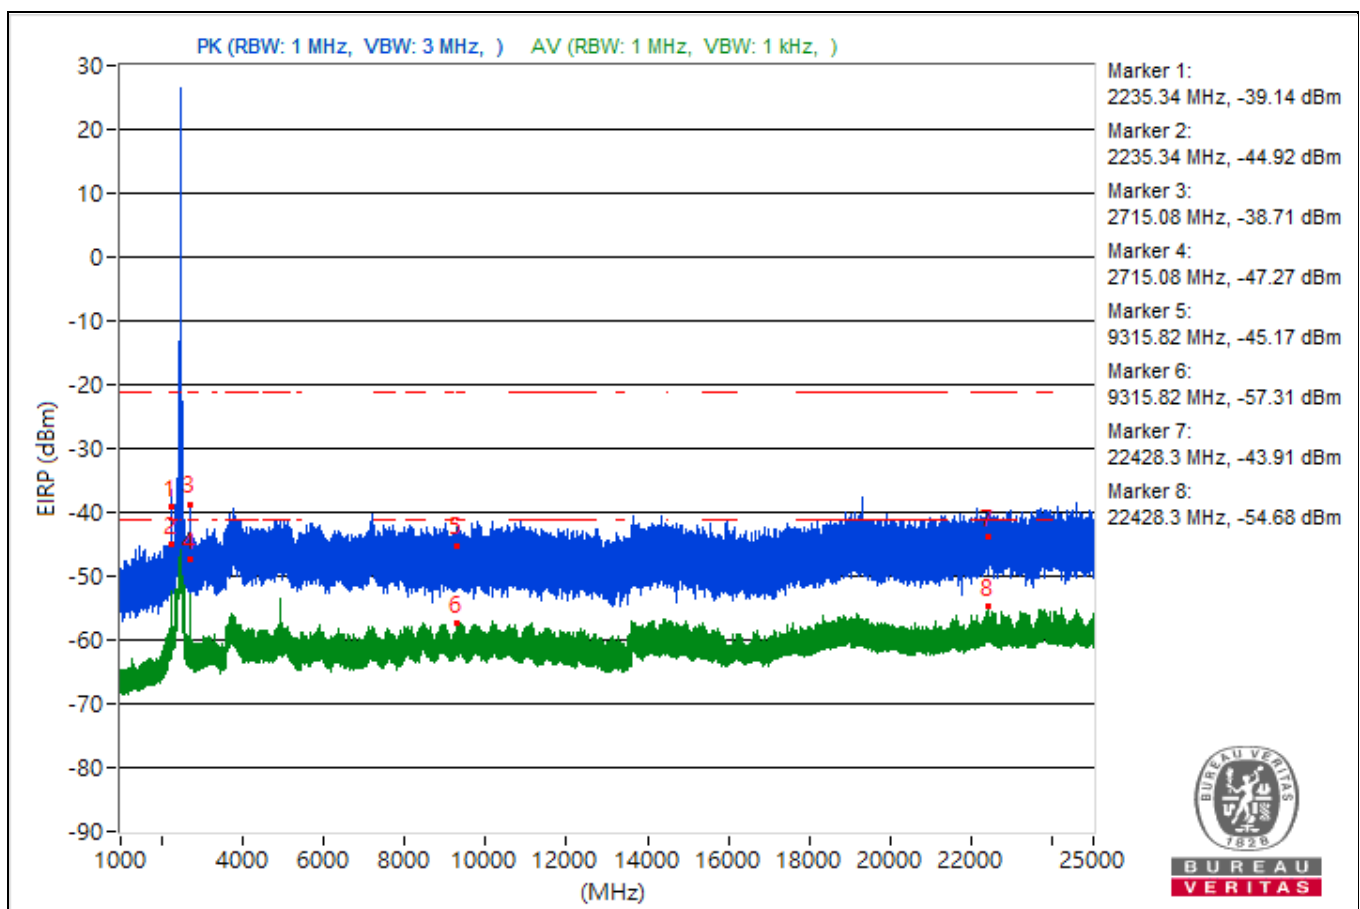

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	24°C, 65% RH
Tested By	Henry Hsu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2240.71	53.27 PK	74	-20.73	-46.91	4.92	-41.99
2	2240.71	45.06 AV	54	-8.94	-55.12	4.92	-50.2
3	2720.76	48.16 PK	74	-25.84	-52.02	4.92	-47.1
4	2720.76	40.9 AV	54	-13.1	-59.28	4.92	-54.36
5	8472.8	49.36 PK	74	-24.64	-50.82	4.92	-45.9
6	8472.8	38.85 AV	54	-15.15	-61.33	4.92	-56.41
7	22813.7	52.8 PK	74	-21.2	-47.38	4.92	-42.46
8	22813.7	39.85 AV	54	-14.15	-60.33	4.92	-55.41


Note: Margin value = Emission Level - Limit value

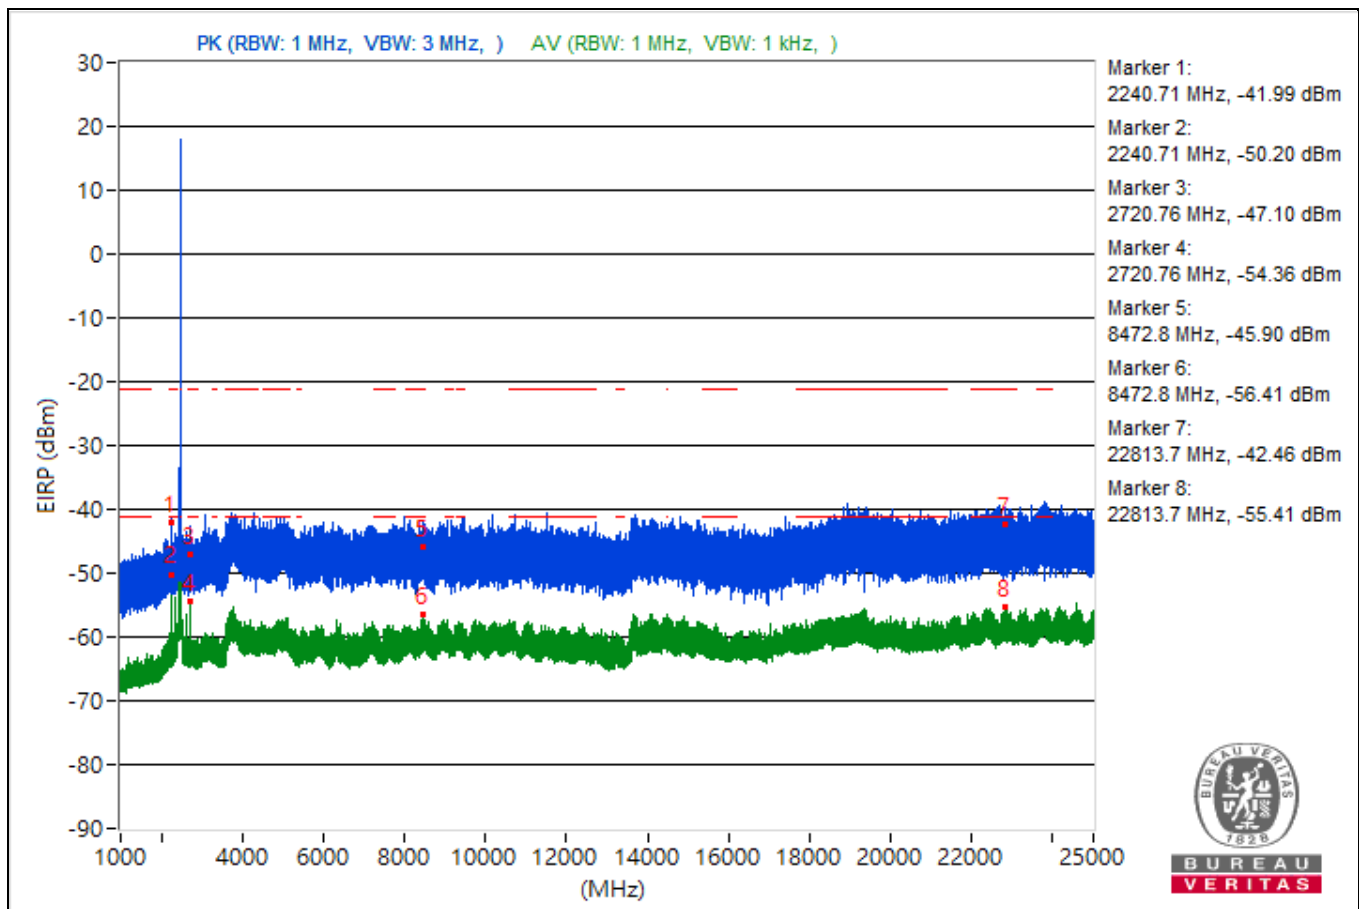

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2284.5	51.24 PK	74	-22.76	-48.94	4.92	-44.02
2	2284.5	45.02 AV	54	-8.98	-55.16	4.92	-50.24
3	4809.01	48.98 PK	74	-25.02	-51.2	4.92	-46.28
4	4809.01	40.27 AV	54	-13.73	-59.91	4.92	-54.99
5	8464.18	45.94 PK	74	-28.06	-54.24	4.92	-49.32
6	8464.18	38.58 AV	54	-15.42	-61.6	4.92	-56.68
7	22459	52.97 PK	74	-21.03	-47.21	4.92	-42.29
8	22459	40.77 AV	54	-13.23	-59.41	4.92	-54.49


Note: Margin value = Emission Level - Limit value

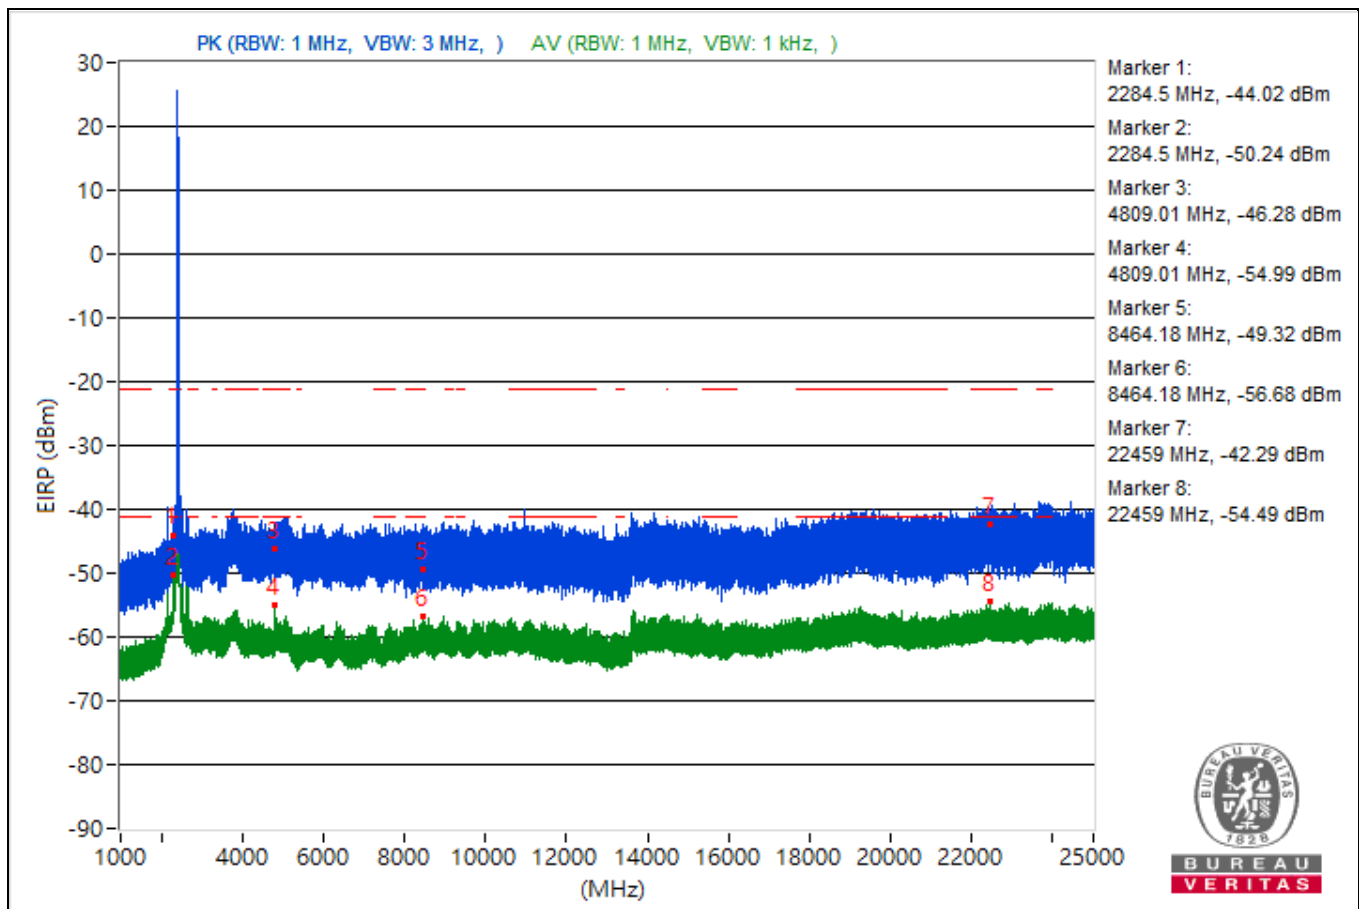

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2310.01	55 PK	74	-19	-45.18	4.92	-40.26
2	2310.01	44.32 AV	54	-9.68	-55.86	4.92	-50.94
3	4859.02	52.71 PK	74	-21.29	-47.47	4.92	-42.55
4	4859.02	43.48 AV	54	-10.52	-56.7	4.92	-51.78
5	14470.76	48.04 PK	74	-25.96	-52.14	4.92	-47.22
6	14470.76	38.5 AV	54	-15.5	-61.68	4.92	-56.76
7	22353.2	49.6 PK	74	-24.4	-50.58	4.92	-45.66
8	22353.2	40.77 AV	54	-13.23	-59.41	4.92	-54.49


Note: Margin value = Emission Level - Limit value

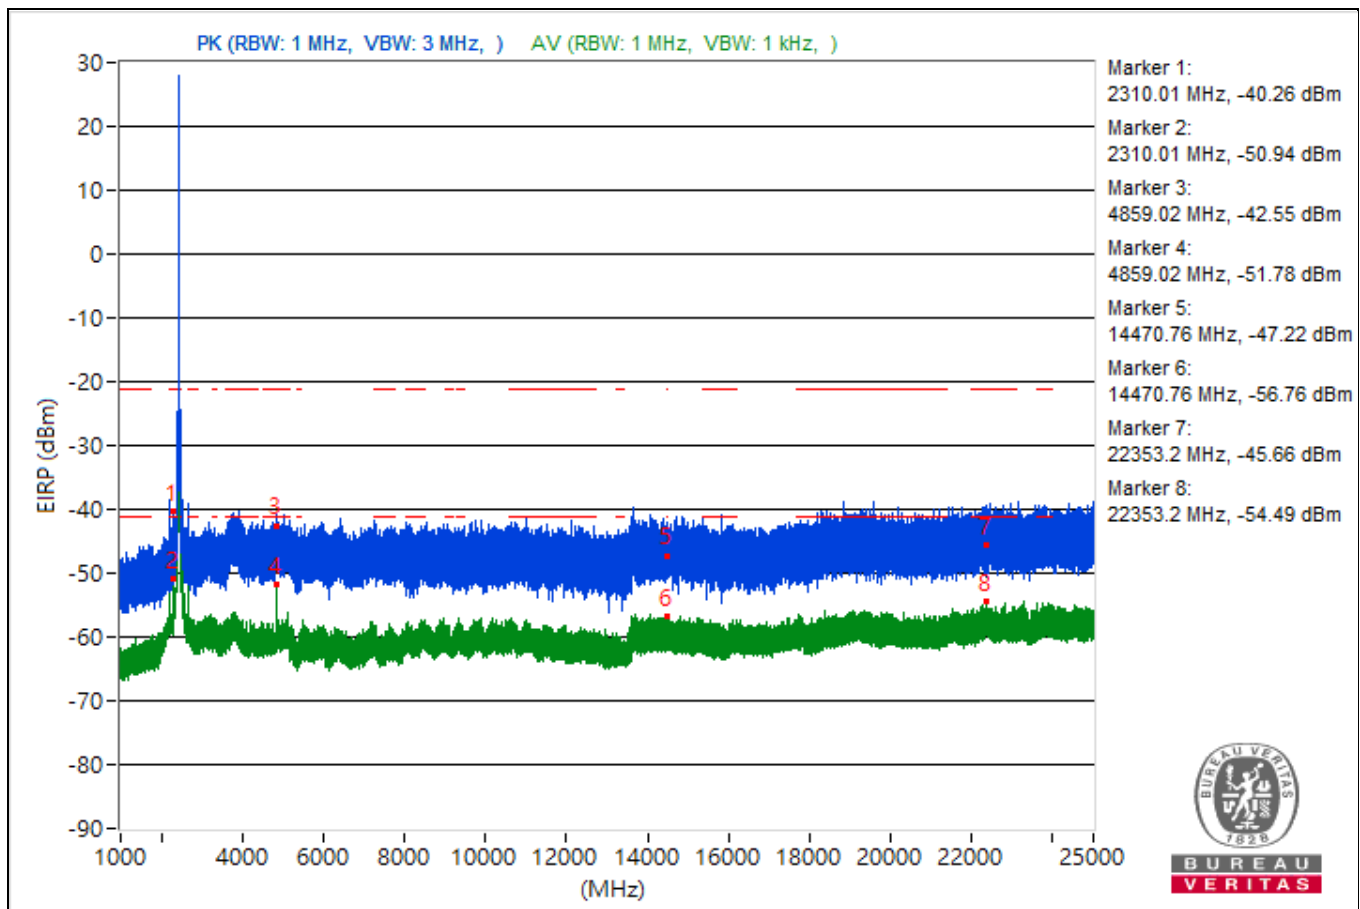

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2230.29	55.14 PK	74	-18.86	-45.04	4.92	-40.12
2	2230.29	48.52 AV	54	-5.48	-51.66	4.92	-46.74
3	2708.7	52.44 PK	74	-21.56	-47.74	4.92	-42.82
4	2708.7	46.89 AV	54	-7.11	-53.29	4.92	-48.37
5	14473.16	48.9 PK	74	-25.1	-51.28	4.92	-46.36
6	14473.16	38.39 AV	54	-15.61	-61.79	4.92	-56.87
7	23823.8	52.79 PK	74	-21.21	-47.39	4.92	-42.47
8	23823.8	40.27 AV	54	-13.73	-59.91	4.92	-54.99


Note: Margin value = Emission Level - Limit value

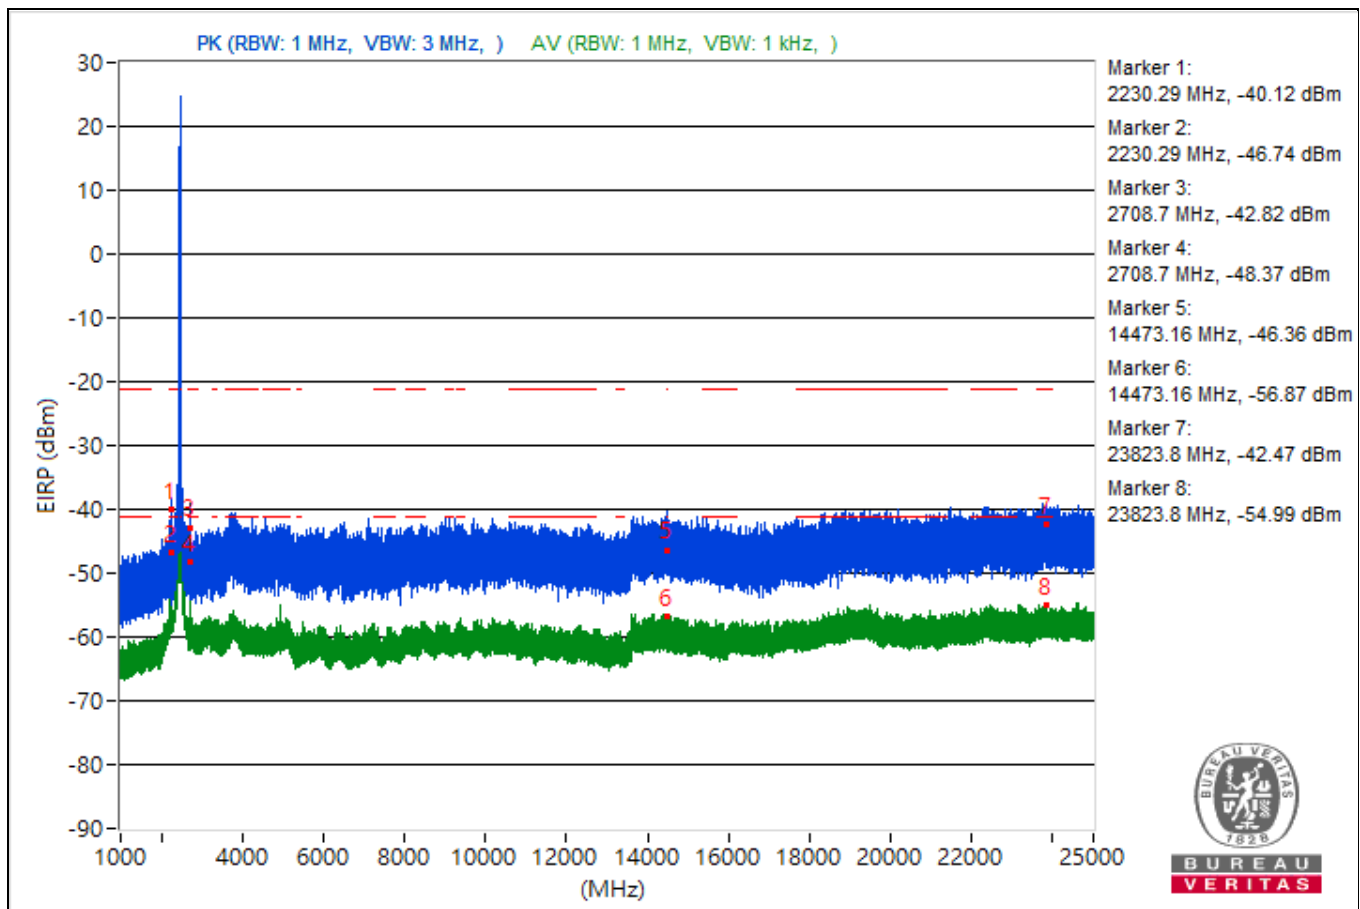

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2235.27	54.78 PK	74	-19.22	-45.4	4.92	-40.48
2	2235.27	48.49 AV	54	-5.51	-51.69	4.92	-46.77
3	2713.29	54.11 PK	74	-19.89	-46.07	4.92	-41.15
4	2713.29	46.22 AV	54	-7.78	-53.96	4.92	-49.04
5	14471.56	50.96 PK	74	-23.04	-49.22	4.92	-44.3
6	14471.56	38.67 AV	54	-15.33	-61.51	4.92	-56.59
7	23895.4	54.31 PK	74	-19.69	-45.87	4.92	-40.95
8	23895.4	40.77 AV	54	-13.23	-59.41	4.92	-54.49


Note: Margin value = Emission Level - Limit value

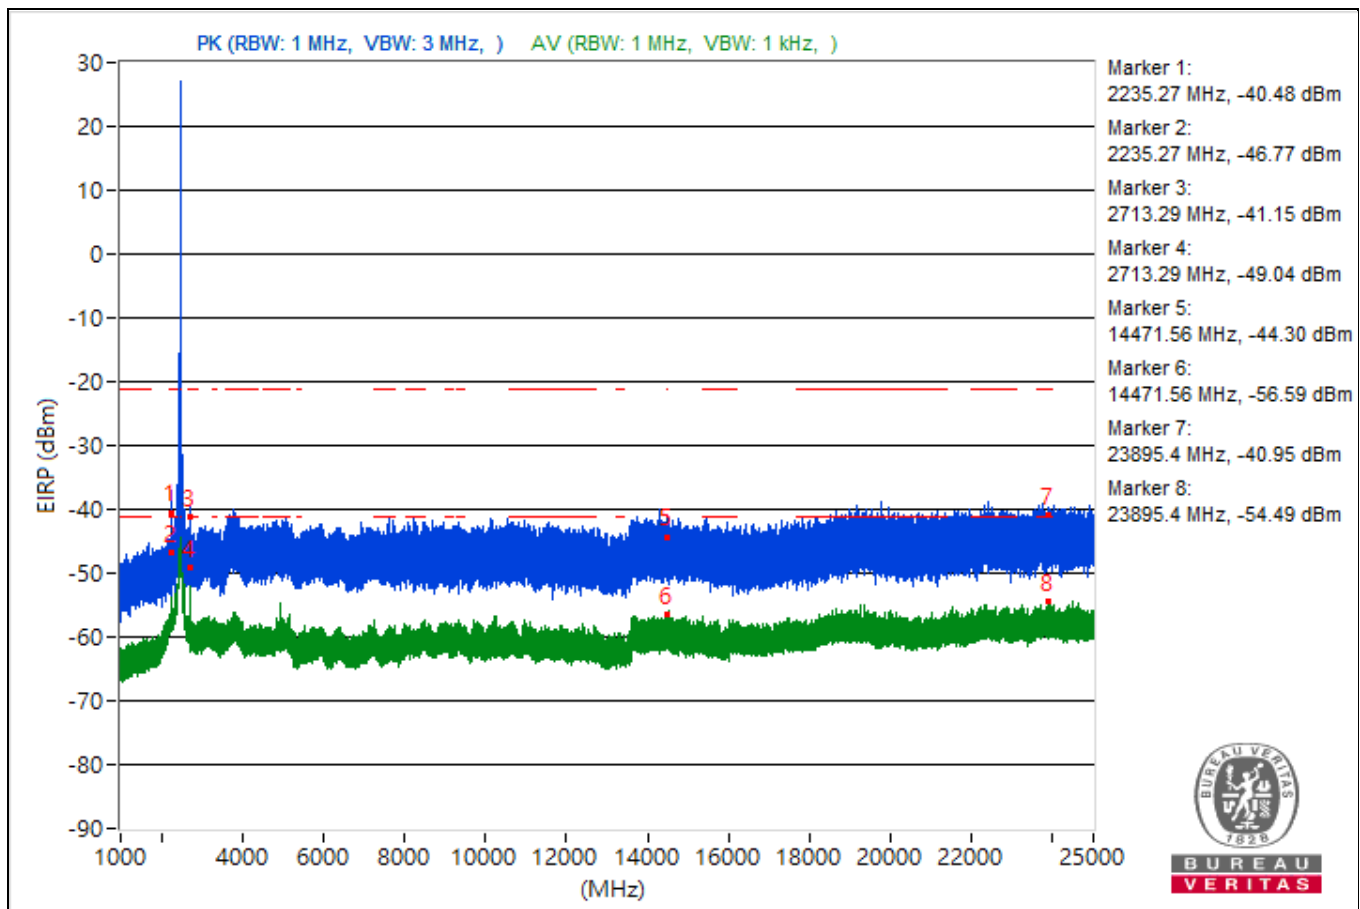

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2239.23	48.8 PK	74	-25.2	-51.38	4.92	-46.46
2	2239.23	43.71 AV	54	-10.29	-56.47	4.92	-51.55
3	2718.97	48.08 PK	74	-25.92	-52.1	4.92	-47.18
4	2718.97	40.41 AV	54	-13.59	-59.77	4.92	-54.85
5	15350.13	50.23 PK	74	-23.77	-49.95	4.92	-45.03
6	15350.13	38.63 AV	54	-15.37	-61.55	4.92	-56.63
7	22350.2	52.37 PK	74	-21.63	-47.81	4.92	-42.89
8	22350.2	41.31 AV	54	-12.69	-58.87	4.92	-53.95


Note: Margin value = Emission Level - Limit value

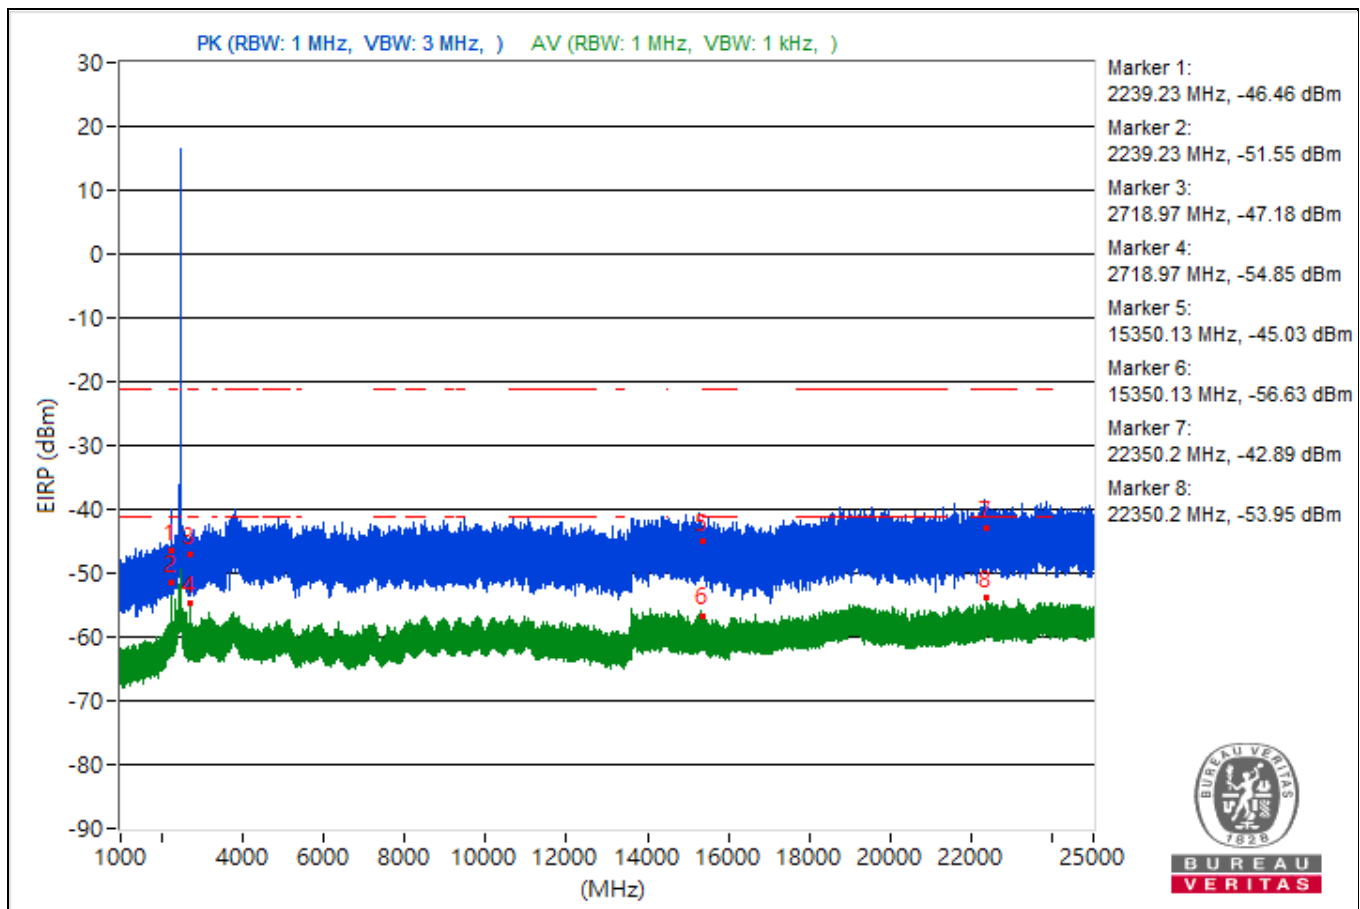

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2289.79	48.88 PK	74	-25.12	-51.3	4.92	-46.38
2	2289.79	42.6 AV	54	-11.4	-57.58	4.92	-52.66
3	3744.23	50.04 PK	74	-23.96	-50.14	4.92	-45.22
4	3744.23	39.55 AV	54	-14.45	-60.63	4.92	-55.71
5	15755.29	46 PK	74	-28	-54.18	4.92	-49.26
6	15755.29	38.7 AV	54	-15.3	-61.48	4.92	-56.56
7	23819.2	49.39 PK	74	-24.61	-50.79	4.92	-45.87
8	23819.2	41.51 AV	54	-12.49	-58.67	4.92	-53.75


Note: Margin value = Emission Level - Limit value

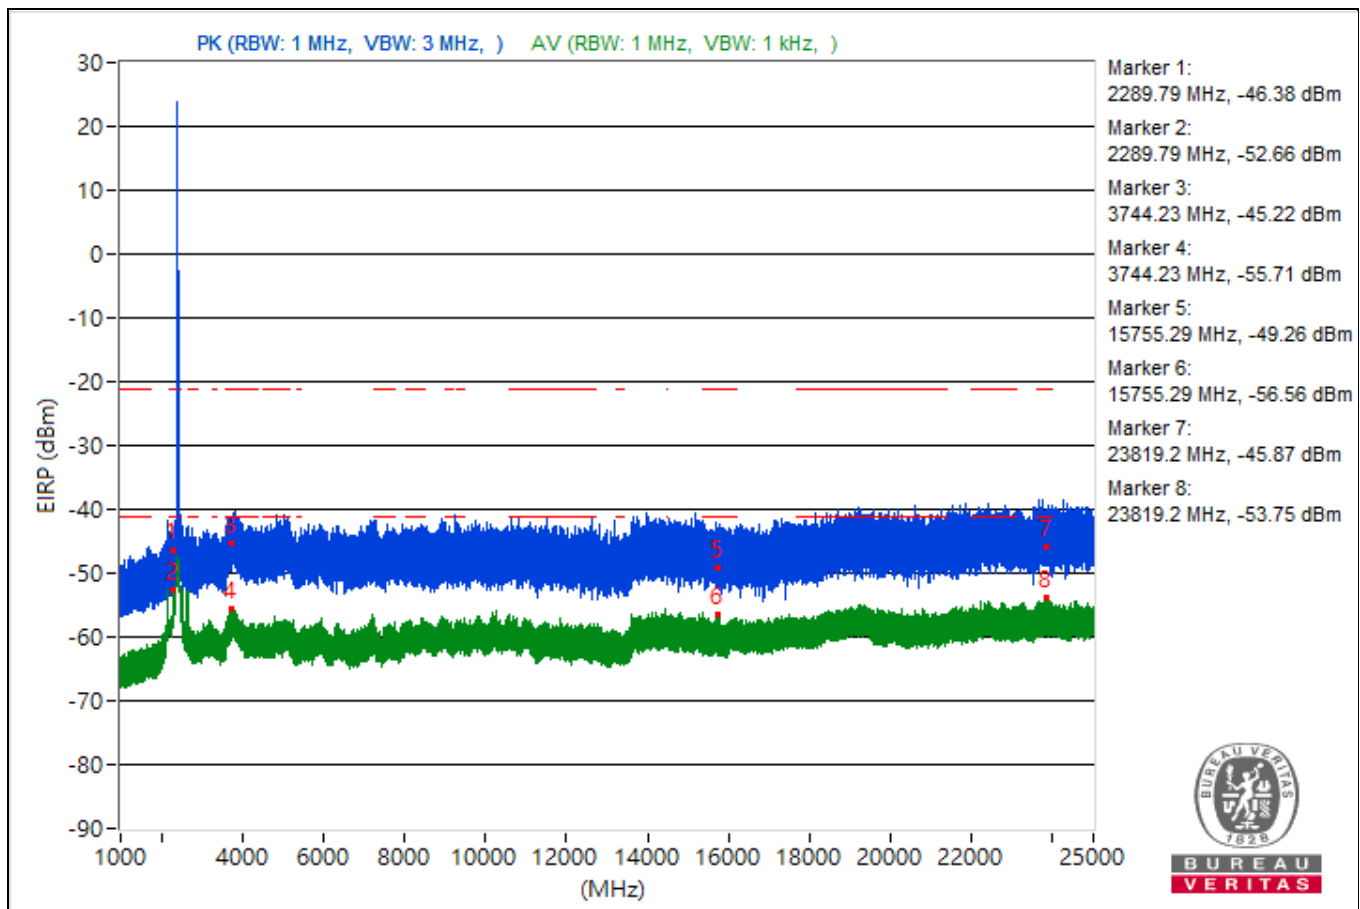

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2313.74	46.94 PK	74	-27.06	-53.24	4.92	-48.32
2	2313.74	42.29 AV	54	-11.71	-57.89	4.92	-52.97
3	4863.46	49.48 PK	74	-24.52	-50.7	4.92	-45.78
4	4863.46	40.22 AV	54	-13.78	-59.96	4.92	-55.04
5	14481.87	49.09 PK	74	-24.91	-51.09	4.92	-46.17
6	14481.87	39.39 AV	54	-14.61	-60.79	4.92	-55.87
7	22360.5	52.4 PK	74	-21.6	-47.78	4.92	-42.86
8	22360.5	41.31 AV	54	-12.69	-58.87	4.92	-53.95


Note: Margin value = Emission Level - Limit value

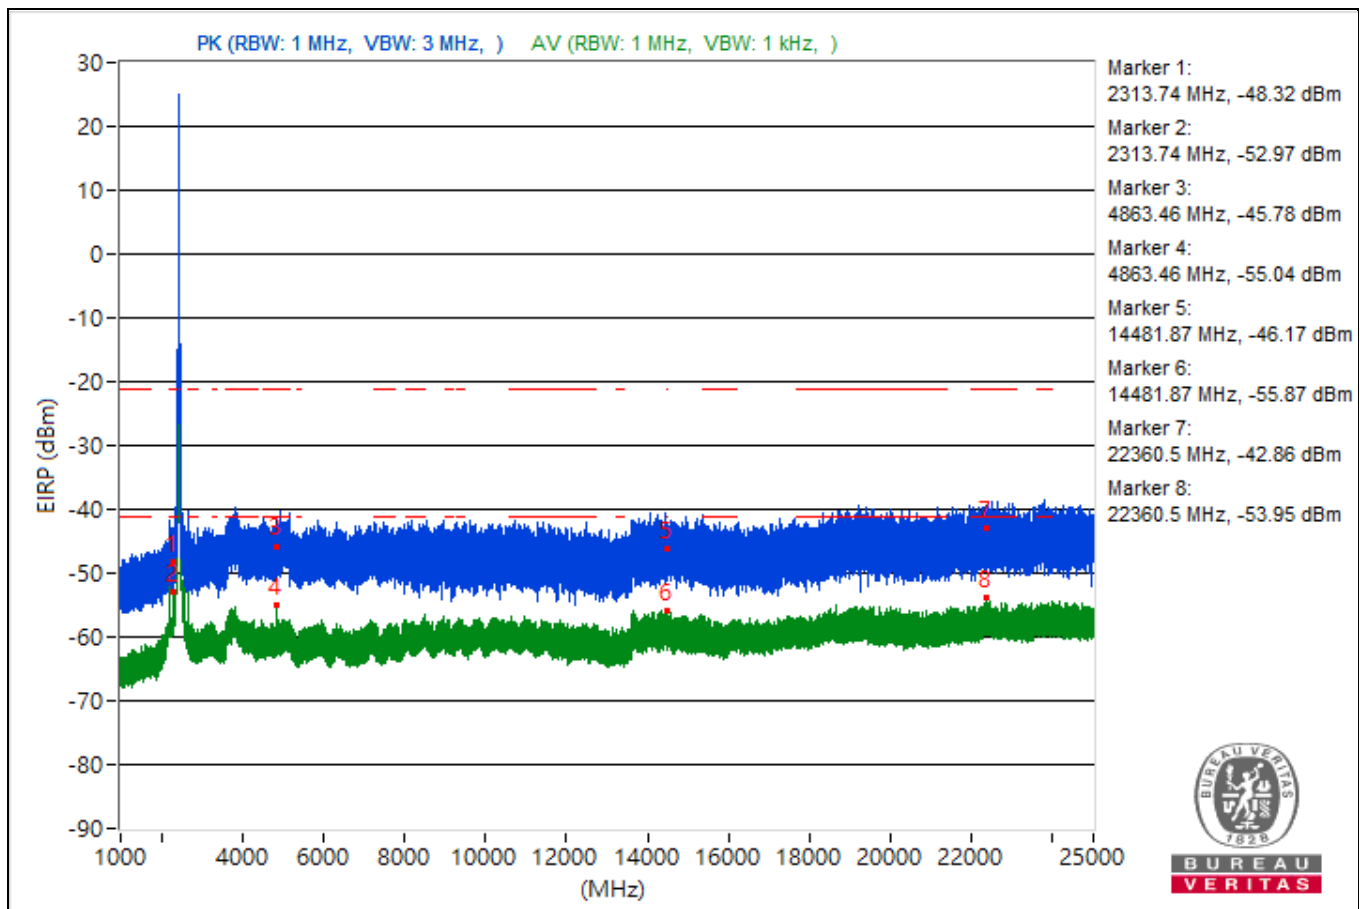

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2230.06	52.23 PK	74	-21.77	-47.95	4.92	-43.03
2	2230.06	45.38 AV	54	-8.62	-54.8	4.92	-49.88
3	2706.21	50.48 PK	74	-23.52	-49.7	4.92	-44.78
4	2706.21	44.13 AV	54	-9.87	-56.05	4.92	-51.13
5	14495.82	48.63 PK	74	-25.37	-51.55	4.92	-46.63
6	14495.82	39.02 AV	54	-14.98	-61.16	4.92	-56.24
7	22369.4	51.56 PK	74	-22.44	-48.62	4.92	-43.7
8	22369.4	41.79 AV	54	-12.21	-58.39	4.92	-53.47


Note: Margin value = Emission Level - Limit value

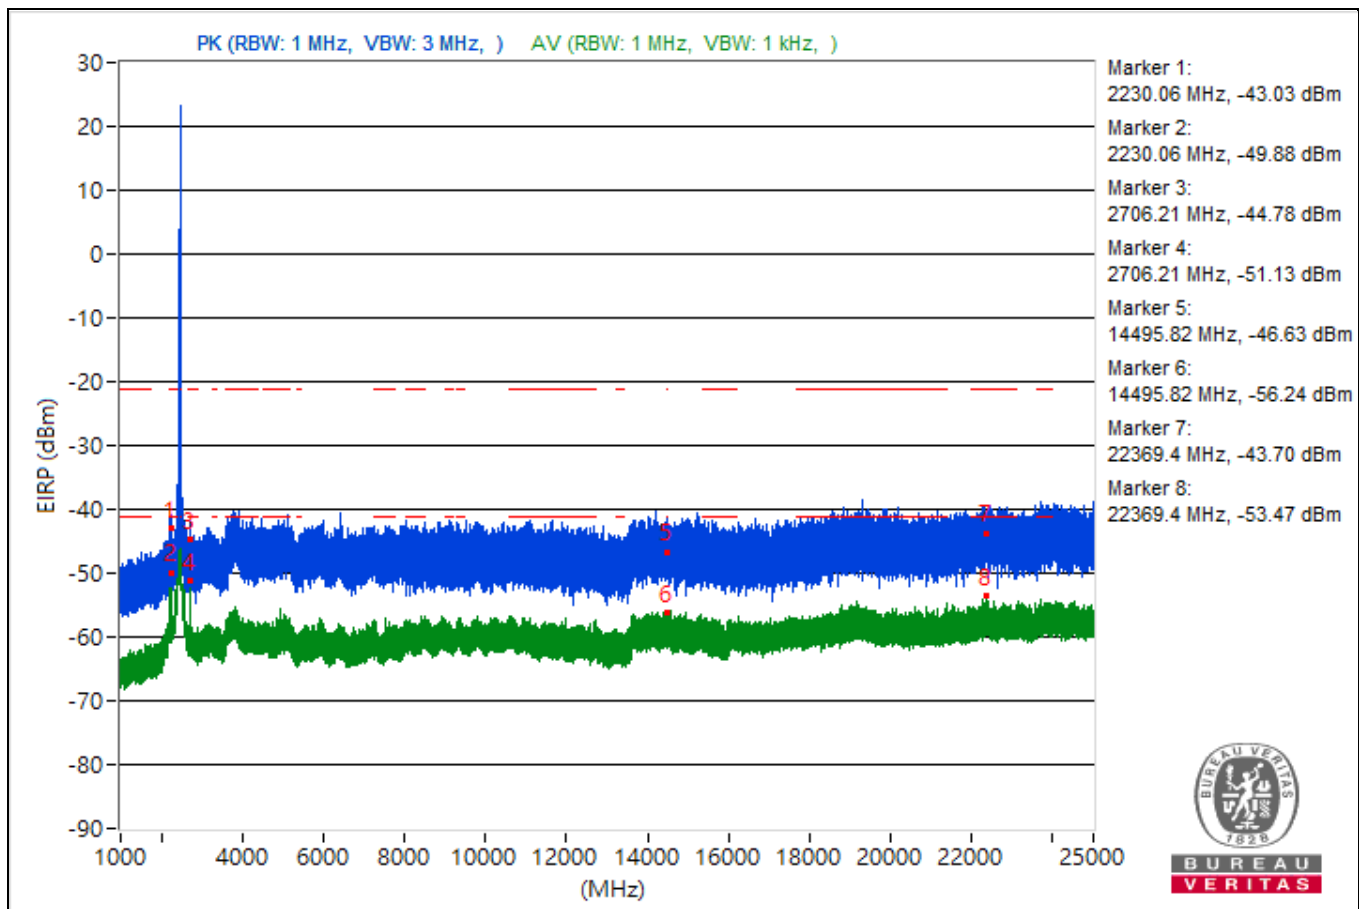

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2233.4	52.64 PK	74	-21.36	-47.54	4.92	-42.62
2	2233.4	45.39 AV	54	-8.61	-54.79	4.92	-49.87
3	2710.33	49.35 PK	74	-24.65	-50.83	4.92	-45.91
4	2710.33	43.62 AV	54	-10.38	-56.56	4.92	-51.64
5	14475.47	49.04 PK	74	-24.96	-51.14	4.92	-46.22
6	14475.47	39.45 AV	54	-14.55	-60.73	4.92	-55.81
7	22504.5	48.23 PK	74	-25.77	-51.95	4.92	-47.03
8	22504.5	41.25 AV	54	-12.75	-58.93	4.92	-54.01


Note: Margin value = Emission Level - Limit value

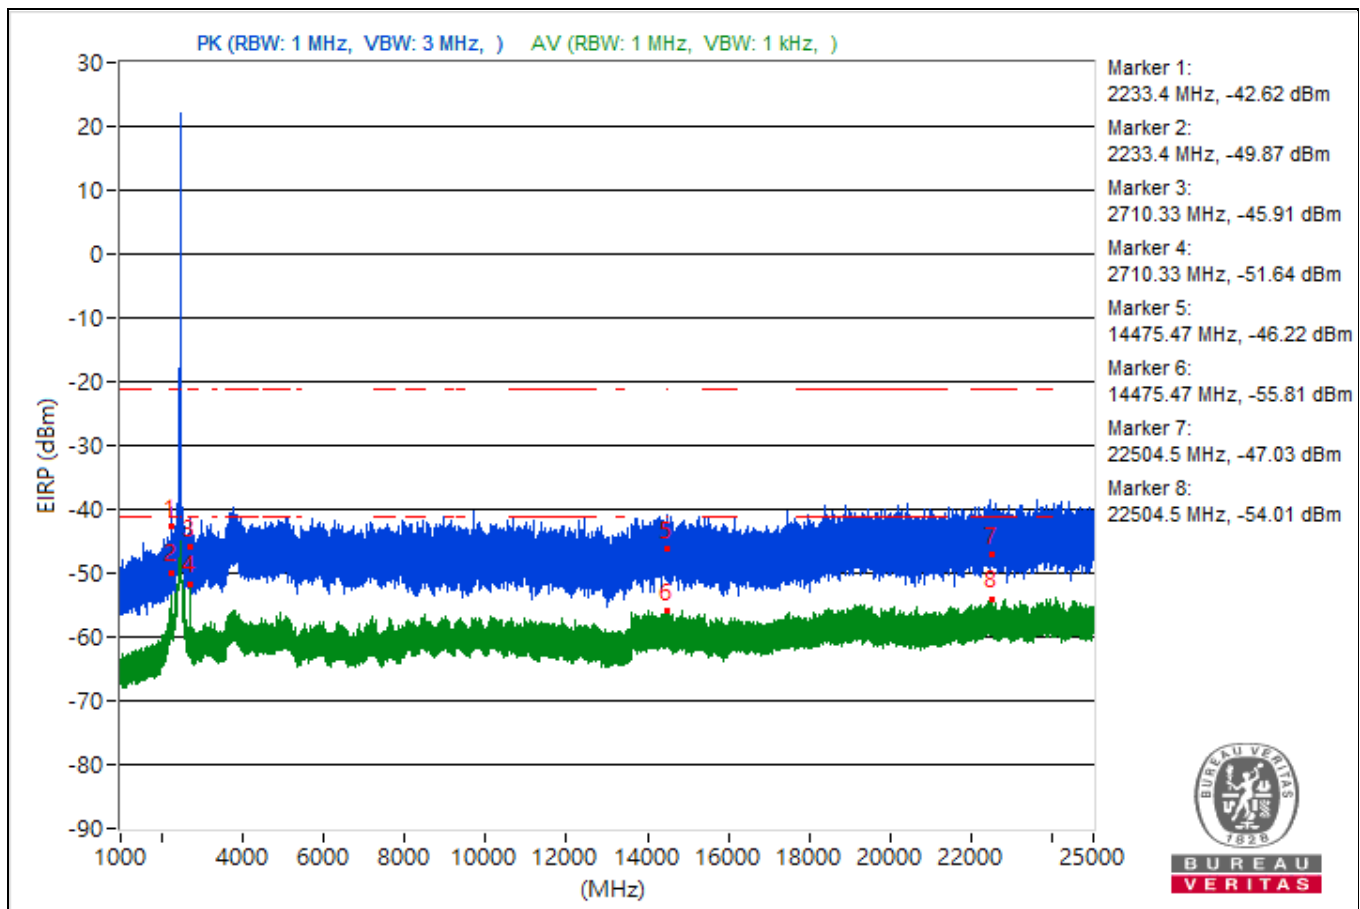

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2237.68	51.96 PK	74	-22.04	-48.22	4.92	-43.3
2	2237.68	41.36 AV	54	-12.64	-58.82	4.92	-53.9
3	2718.27	48.48 PK	74	-25.52	-51.7	4.92	-46.78
4	2718.27	39.65 AV	54	-14.35	-60.53	4.92	-55.61
5	14498.04	47.92 PK	74	-26.08	-52.26	4.92	-47.34
6	14498.04	39.07 AV	54	-14.93	-61.11	4.92	-56.19
7	23847.5	48.57 PK	74	-25.43	-51.61	4.92	-46.69
8	23847.5	40.99 AV	54	-13.01	-59.19	4.92	-54.27


Note: Margin value = Emission Level - Limit value

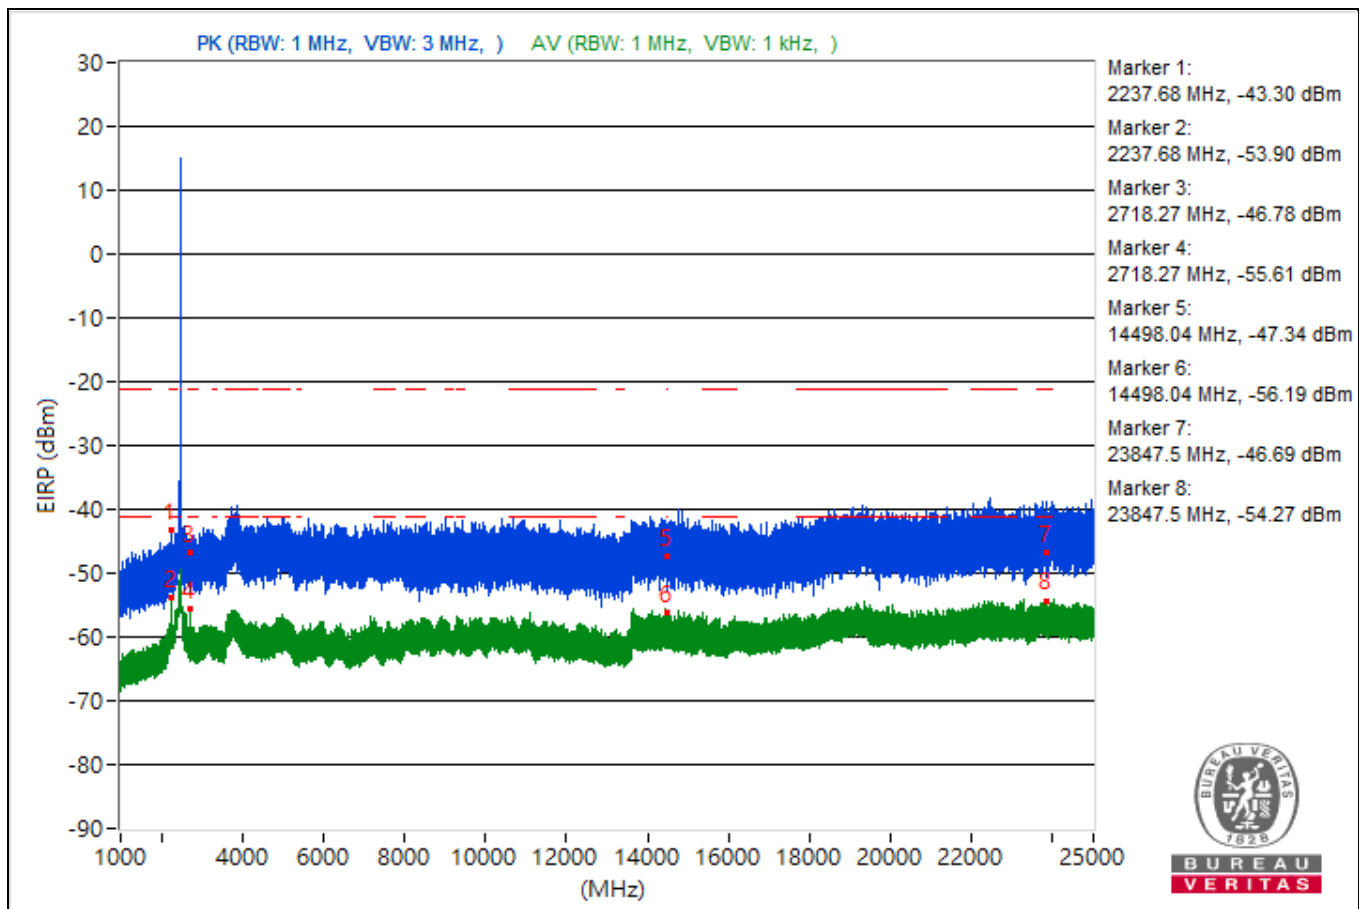

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2288.86	47.85 PK	74	-26.15	-52.33	4.92	-47.41
2	2288.86	43.54 AV	54	-10.46	-56.64	4.92	-51.72
3	3771.46	50.15 PK	74	-23.85	-50.03	4.92	-45.11
4	3771.46	40.51 AV	54	-13.49	-59.67	4.92	-54.75
5	14488.18	46.78 PK	74	-27.22	-53.4	4.92	-48.48
6	14488.18	39.31 AV	54	-14.69	-60.87	4.92	-55.95
7	23966.2	51.44 PK	74	-22.56	-48.74	4.92	-43.82
8	23966.2	41.04 AV	54	-12.96	-59.14	4.92	-54.22


Note: Margin value = Emission Level - Limit value

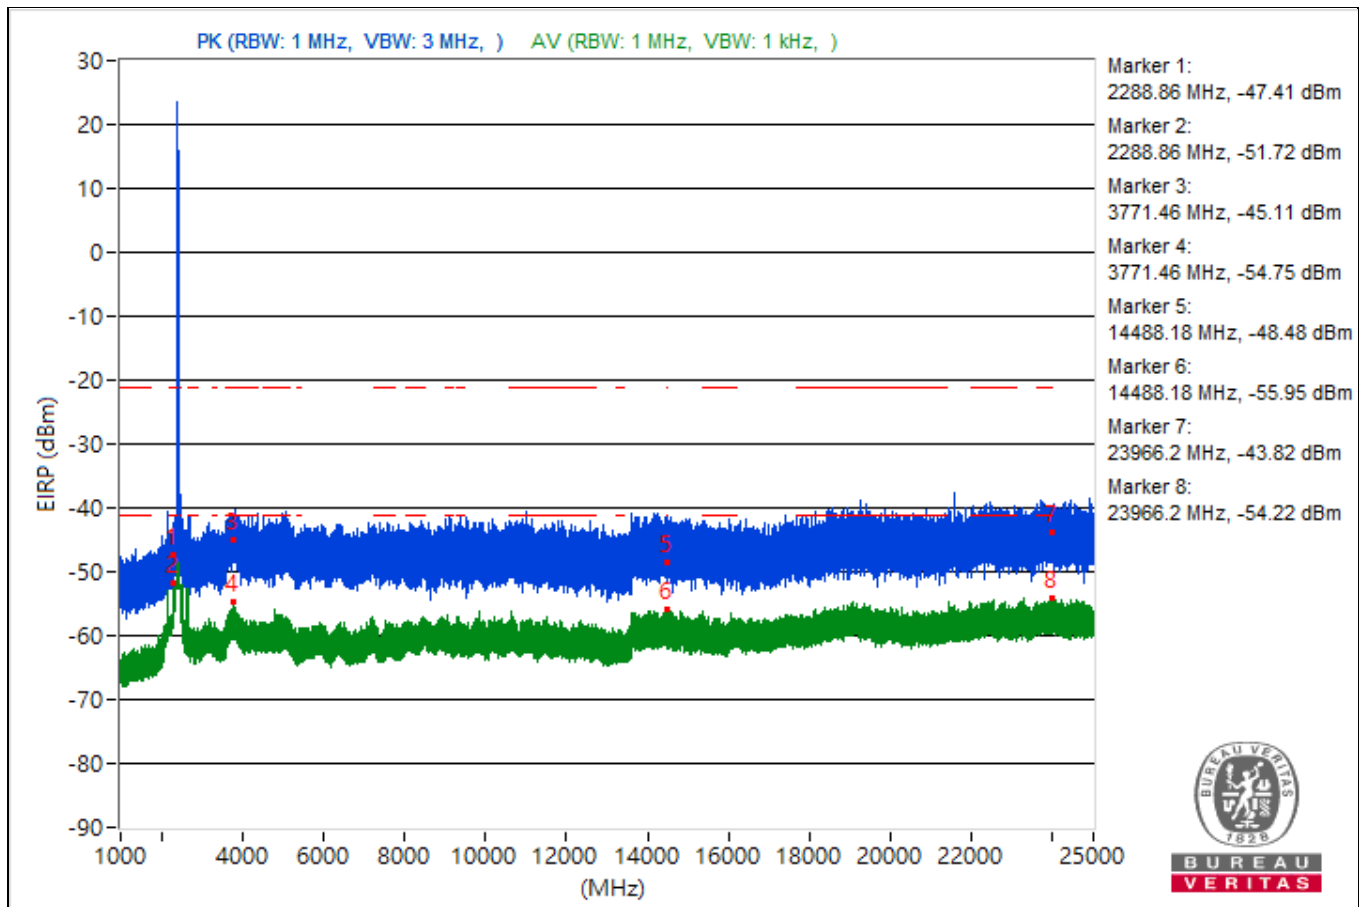

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2312.66	51.36 PK	74	-22.64	-48.82	4.92	-43.9
2	2312.66	42.92 AV	54	-11.08	-57.26	4.92	-52.34
3	4865.79	51.78 PK	74	-22.22	-48.4	4.92	-43.48
4	4865.79	41.22 AV	54	-12.78	-58.96	4.92	-54.04
5	14479.02	48.96 PK	74	-25.04	-51.22	4.92	-46.3
6	14479.02	39.74 AV	54	-14.26	-60.44	4.92	-55.52
7	23618.4	49.11 PK	74	-24.89	-51.07	4.92	-46.15
8	23618.4	41.02 AV	54	-12.98	-59.16	4.92	-54.24


Note: Margin value = Emission Level - Limit value

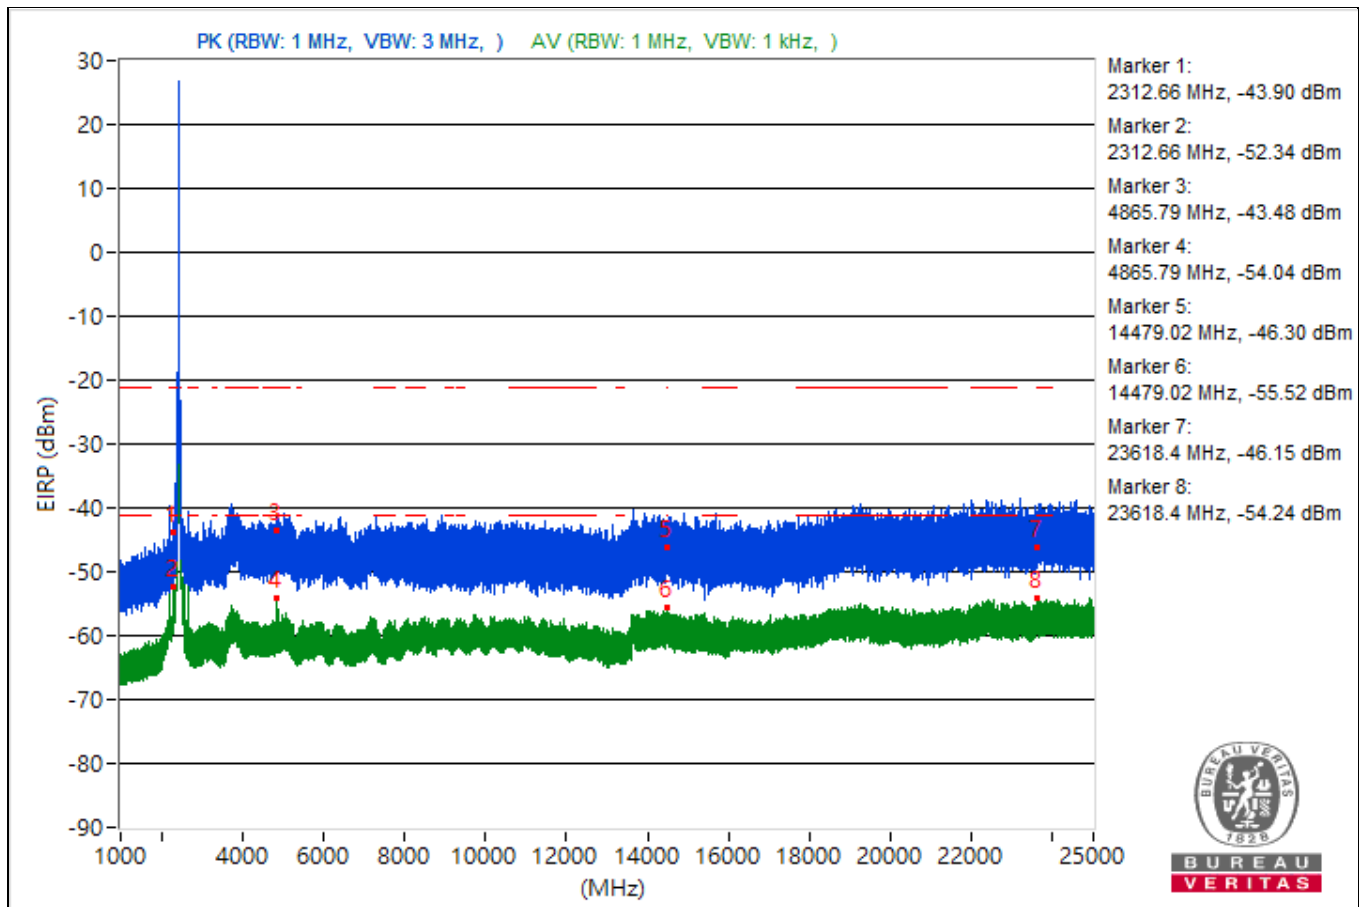

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2228.34	52.52 PK	74	-21.48	-47.66	4.92	-42.74
2	2228.34	46.45 AV	54	-7.55	-53.73	4.92	-48.81
3	2704.66	51.42 PK	74	-22.58	-48.76	4.92	-43.84
4	2704.66	44.83 AV	54	-9.17	-55.35	4.92	-50.43
5	8480.53	46.62 PK	74	-27.38	-53.56	4.92	-48.64
6	8480.53	38.53 AV	54	-15.47	-61.65	4.92	-56.73
7	22369.8	51.75 PK	74	-22.25	-48.43	4.92	-43.51
8	22369.8	41.14 AV	54	-12.86	-59.04	4.92	-54.12


Note: Margin value = Emission Level - Limit value

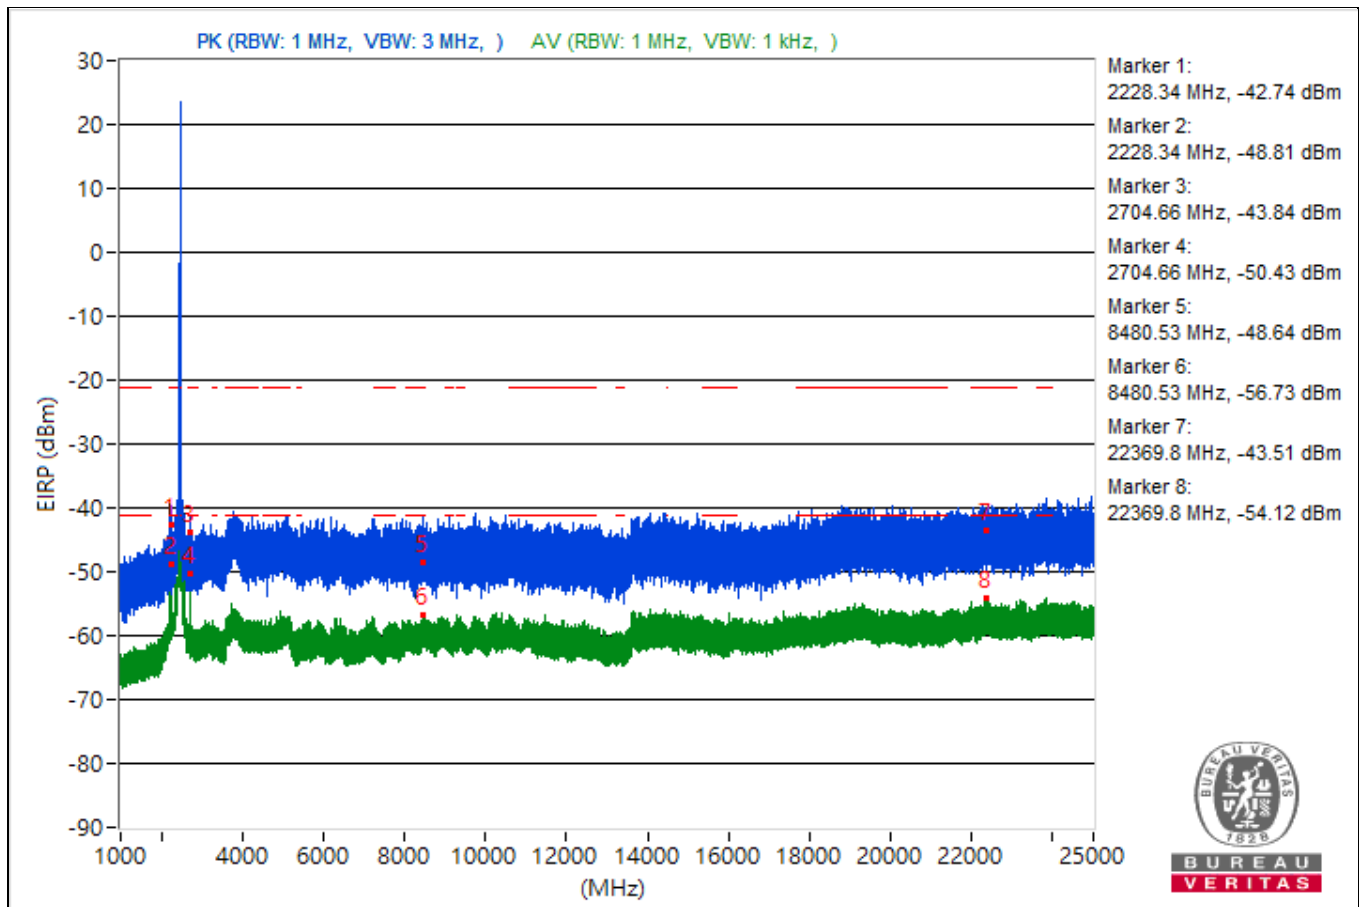

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2232.93	53.71 PK	74	-20.29	-46.47	4.92	-41.55
2	2232.93	46.33 AV	54	-7.67	-53.85	4.92	-48.93
3	2710.41	51.28 PK	74	-22.72	-48.9	4.92	-43.98
4	2710.41	44.65 AV	54	-9.35	-55.53	4.92	-50.61
5	8480.89	49.29 PK	74	-24.71	-50.89	4.92	-45.97
6	8480.89	38.71 AV	54	-15.29	-61.47	4.92	-56.55
7	22354.3	49.66 PK	74	-24.34	-50.52	4.92	-45.6
8	22354.3	42 AV	54	-12	-58.18	4.92	-53.26


Note: Margin value = Emission Level - Limit value

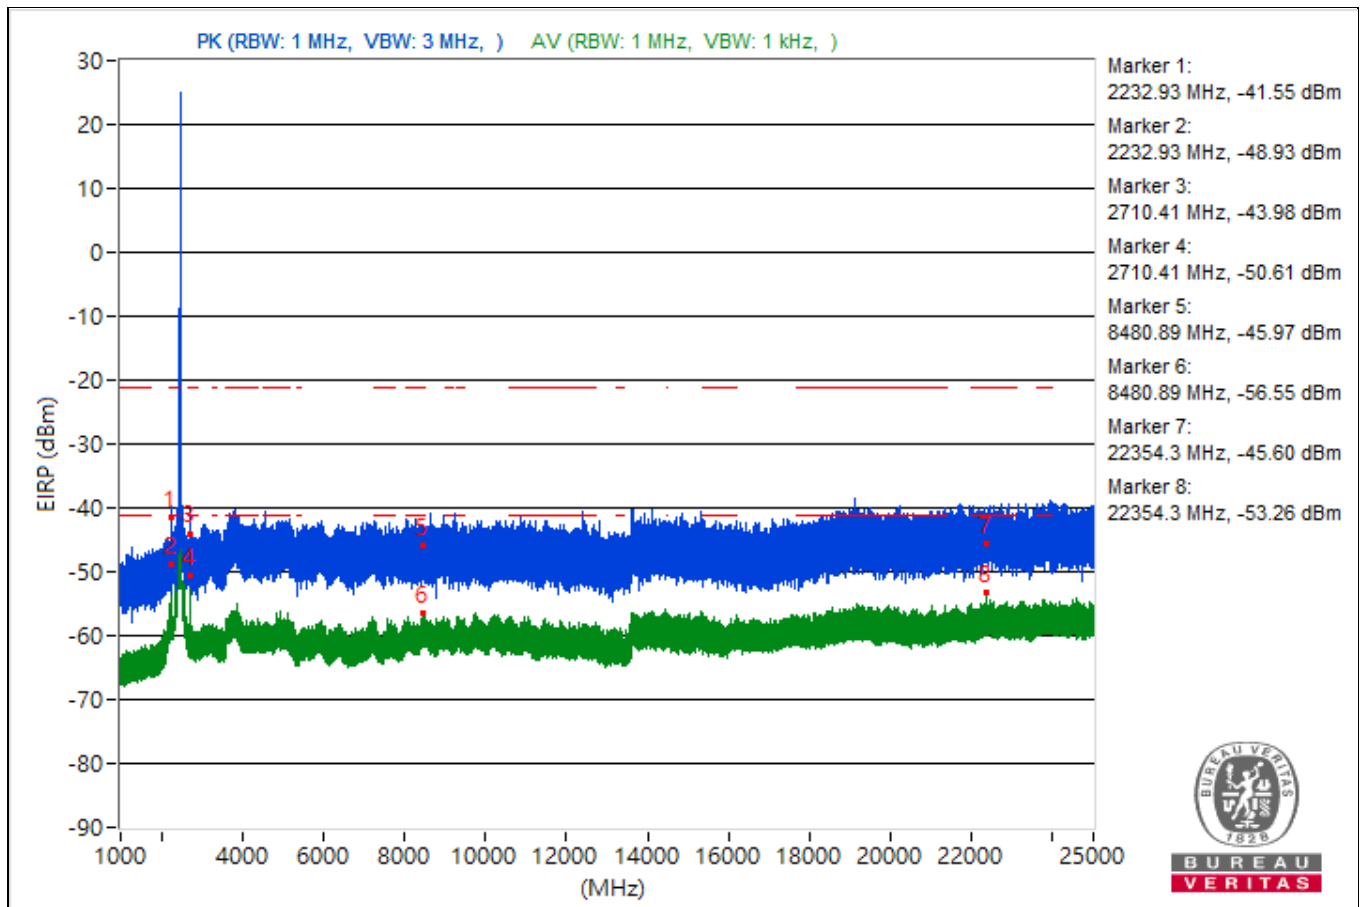

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2236.51	53.99 PK	74	-20.01	-46.19	4.92	-41.27
2	2236.51	46.17 AV	54	-7.83	-54.01	4.92	-49.09
3	2718.19	51.95 PK	74	-22.05	-48.23	4.92	-43.31
4	2718.19	44.17 AV	54	-9.83	-56.01	4.92	-51.09
5	10633.78	48.04 PK	74	-25.96	-52.14	4.92	-47.22
6	10633.78	38.91 AV	54	-15.09	-61.27	4.92	-56.35
7	23875.7	52.61 PK	74	-21.39	-47.57	4.92	-42.65
8	23875.7	41.23 AV	54	-12.77	-58.95	4.92	-54.03


Note: Margin value = Emission Level - Limit value

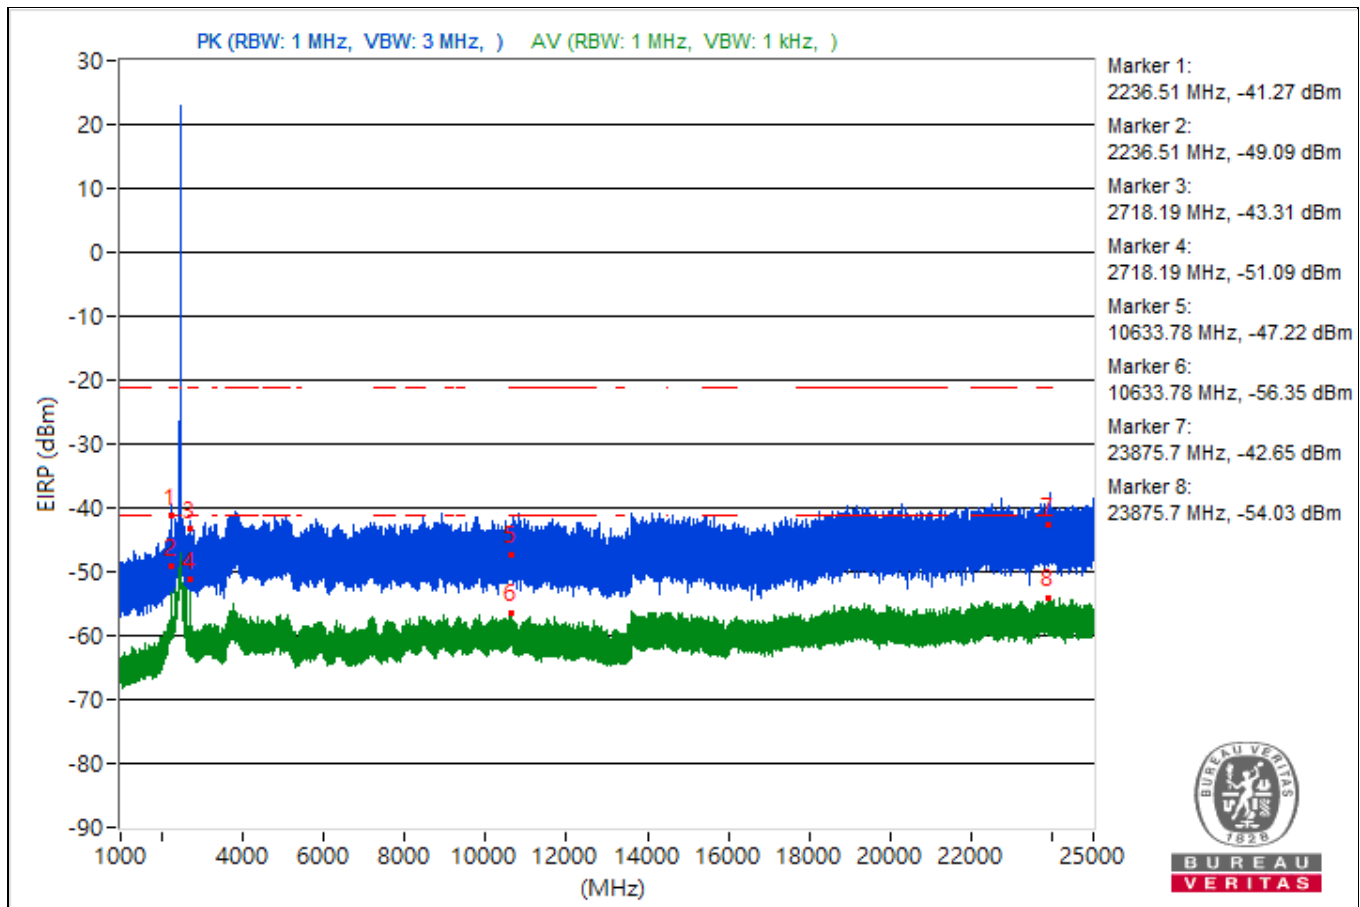

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2289.48	51.58 PK	74	-22.42	-48.6	4.92	-43.68
2	2289.48	42.58 AV	54	-11.42	-57.6	4.92	-52.68
3	3776.12	53.13 PK	74	-20.87	-47.05	4.92	-42.13
4	3776.12	39.83 AV	54	-14.17	-60.35	4.92	-55.43
5	14493.51	49.83 PK	74	-24.17	-50.35	4.92	-45.43
6	14493.51	38.63 AV	54	-15.37	-61.55	4.92	-56.63
7	23946.6	52.18 PK	74	-21.82	-48	4.92	-43.08
8	23946.6	41.41 AV	54	-12.59	-58.77	4.92	-53.85


Note: Margin value = Emission Level - Limit value

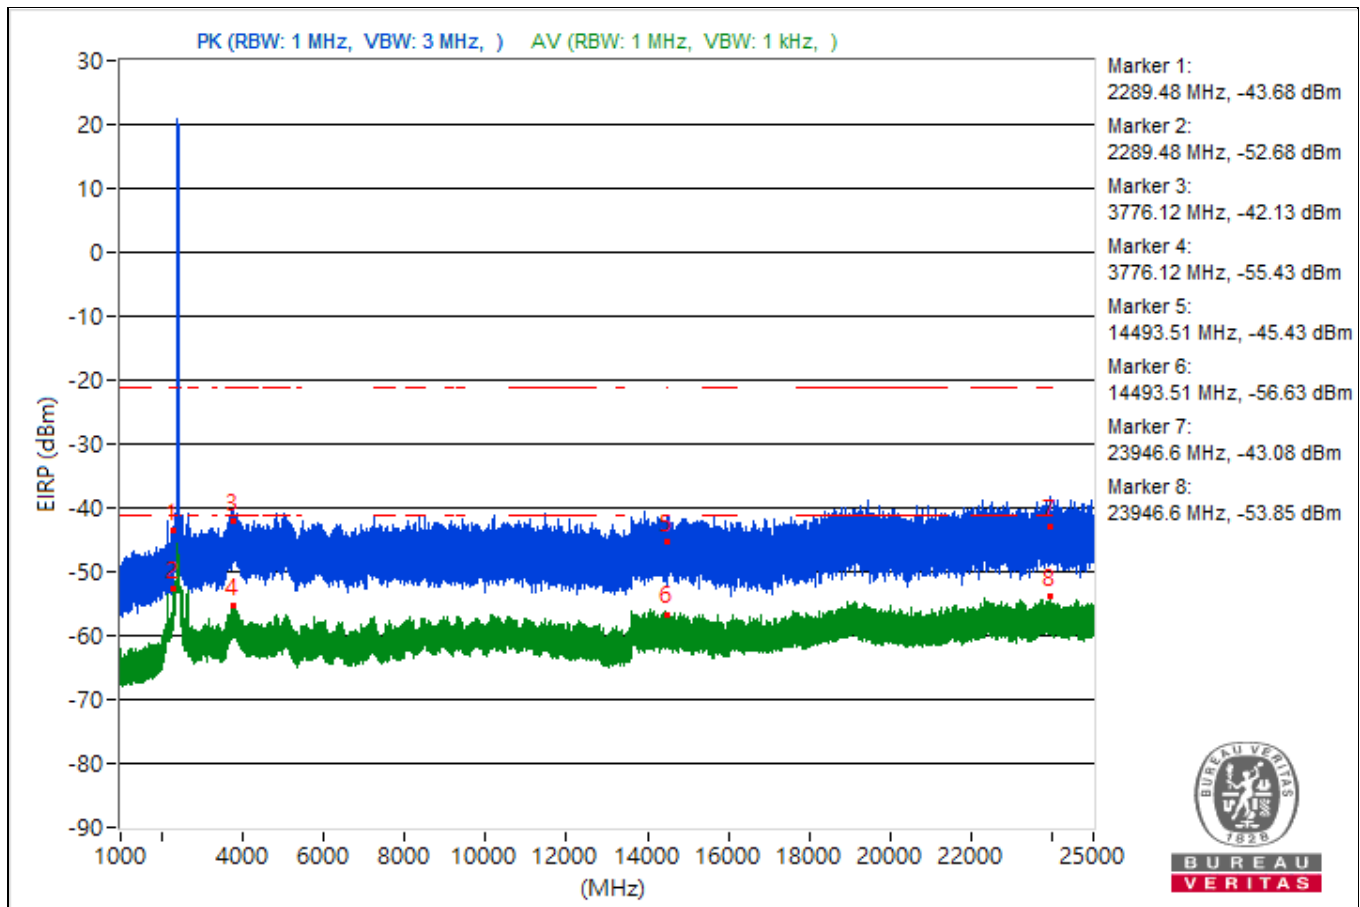

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2312.89	49.18 PK	74	-24.82	-51	4.92	-46.08
2	2312.89	42.07 AV	54	-11.93	-58.11	4.92	-53.19
3	4865.48	49.82 PK	74	-24.18	-50.36	4.92	-45.44
4	4865.48	40.57 AV	54	-13.43	-59.61	4.92	-54.69
5	14486.84	49.45 PK	74	-24.55	-50.73	4.92	-45.81
6	14486.84	39.1 AV	54	-14.9	-61.08	4.92	-56.16
7	22461.4	49.59 PK	74	-24.41	-50.59	4.92	-45.67
8	22461.4	40.99 AV	54	-13.01	-59.19	4.92	-54.27


Note: Margin value = Emission Level - Limit value

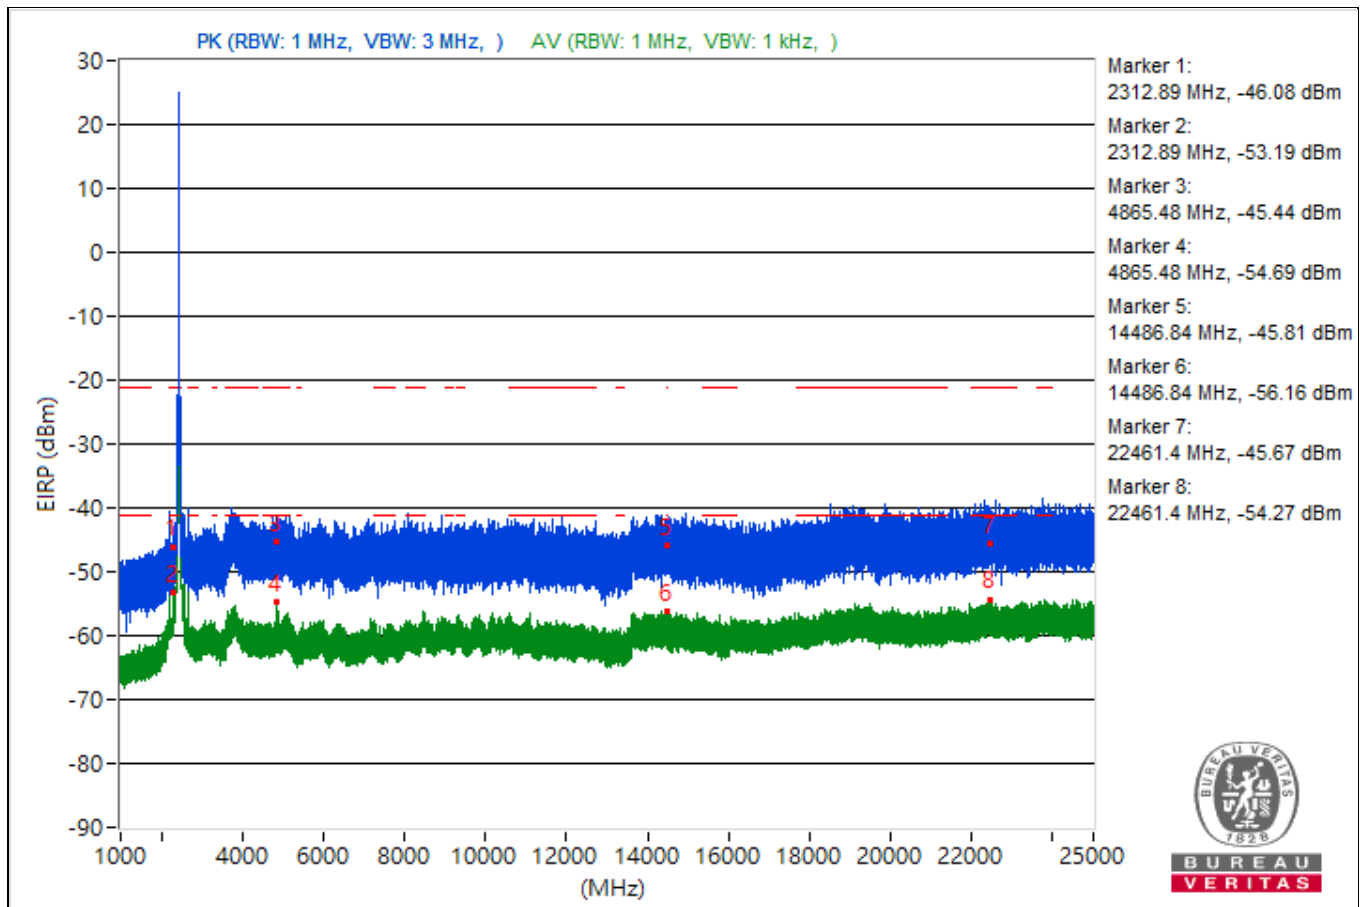

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2223.91	53.38 PK	74	-20.62	-46.8	4.92	-41.88
2	2223.91	45.1 AV	54	-8.9	-55.08	4.92	-50.16
3	2703.8	50.28 PK	74	-23.72	-49.9	4.92	-44.98
4	2703.8	44.04 AV	54	-9.96	-56.14	4.92	-51.22
5	14479.38	49.22 PK	74	-24.78	-50.96	4.92	-46.04
6	14479.38	39.23 AV	54	-14.77	-60.95	4.92	-56.03
7	22349.7	51.13 PK	74	-22.87	-49.05	4.92	-44.13
8	22349.7	41.28 AV	54	-12.72	-58.9	4.92	-53.98


Note: Margin value = Emission Level - Limit value

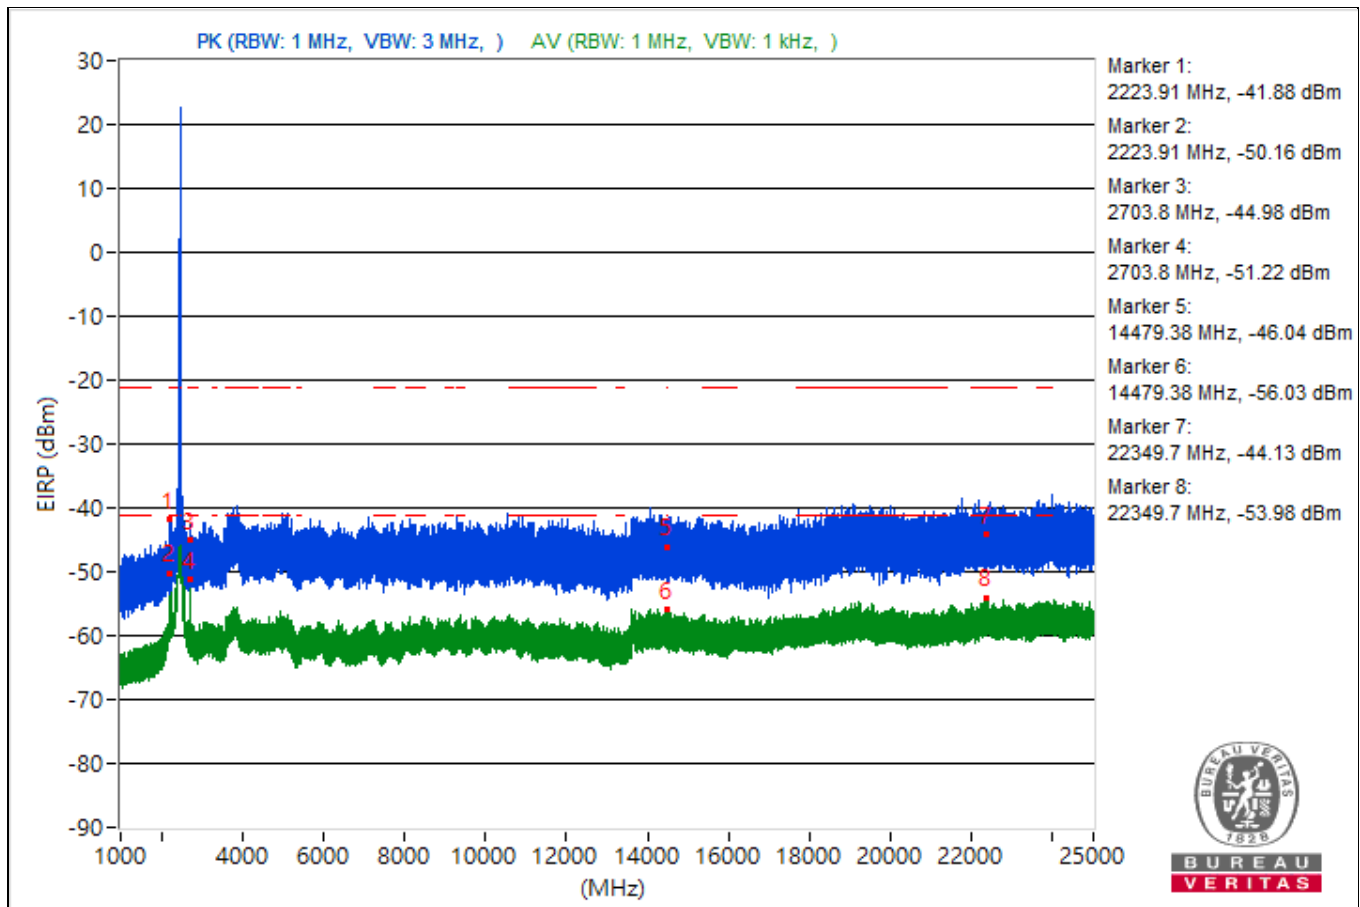

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2228.27	54.28 PK	74	-19.72	-45.9	4.92	-40.98
2	2228.27	44.86 AV	54	-9.14	-55.32	4.92	-50.4
3	2708.39	52.01 PK	74	-21.99	-48.17	4.92	-43.25
4	2708.39	43.7 AV	54	-10.3	-56.48	4.92	-51.56
5	14484.44	50.39 PK	74	-23.61	-49.79	4.92	-44.87
6	14484.44	38.92 AV	54	-15.08	-61.26	4.92	-56.34
7	23628.2	48.91 PK	74	-25.09	-51.27	4.92	-46.35
8	23628.2	41.7 AV	54	-12.3	-58.48	4.92	-53.56


Note: Margin value = Emission Level - Limit value

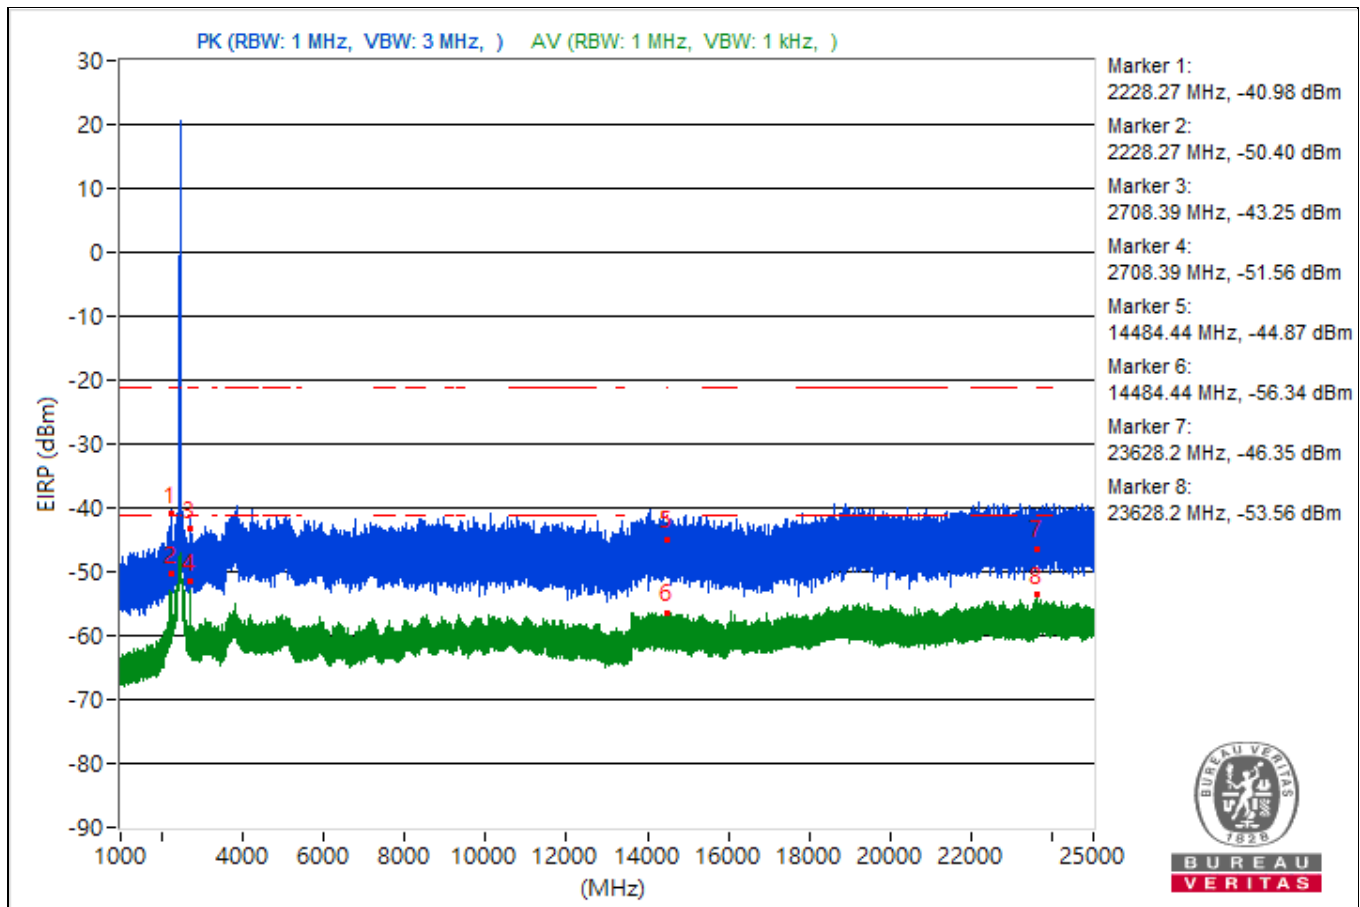

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2234.18	50.65 PK	74	-23.35	-49.53	4.92	-44.61
2	2234.18	44.15 AV	54	-9.85	-56.03	4.92	-51.11
3	2713.99	51.33 PK	74	-22.67	-48.85	4.92	-43.93
4	2713.99	42.58 AV	54	-11.42	-57.6	4.92	-52.68
5	14499.82	51.21 PK	74	-22.79	-48.97	4.92	-44.05
6	14499.82	39.58 AV	54	-14.42	-60.6	4.92	-55.68
7	23797.5	51.67 PK	74	-22.33	-48.51	4.92	-43.59
8	23797.5	41.13 AV	54	-12.87	-59.05	4.92	-54.13

Note: Margin value = Emission Level - Limit value

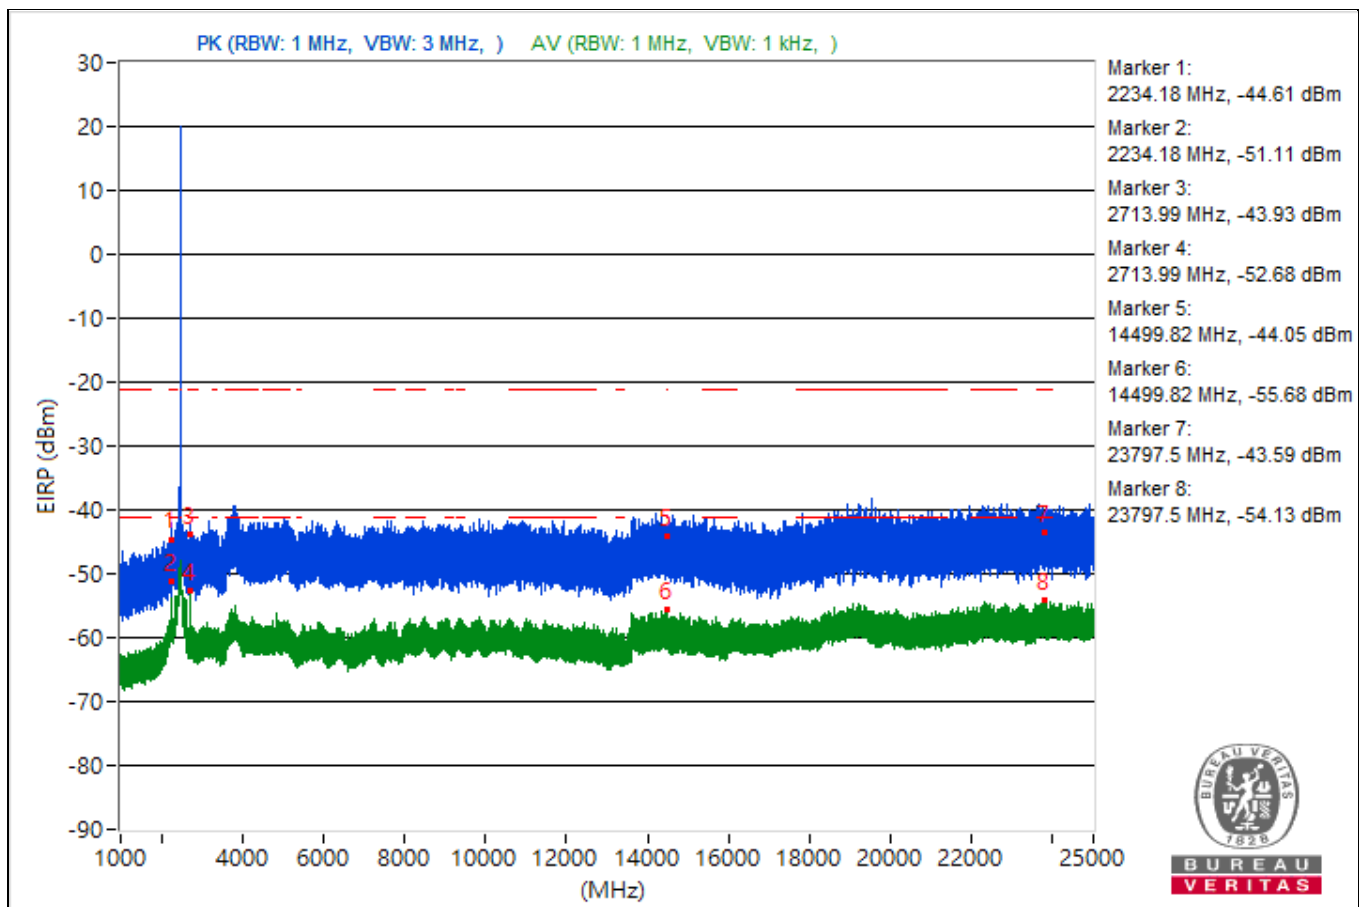


Conducted Band Edges

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2411.18	112.8 PK			14.36	3.18	17.54
2	*2411.18	108.66 AV			10.22	3.18	13.4
3	2386.36	57.69 PK	74	-16.31	-40.75	3.18	-37.57
4	2386.36	50.18 AV	54	-3.82	-48.26	3.18	-45.08
5	2485.44	48.91 PK	74	-25.09	-49.53	3.18	-46.35
6	2485.44	38.08 AV	54	-15.92	-60.36	3.18	-57.18

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

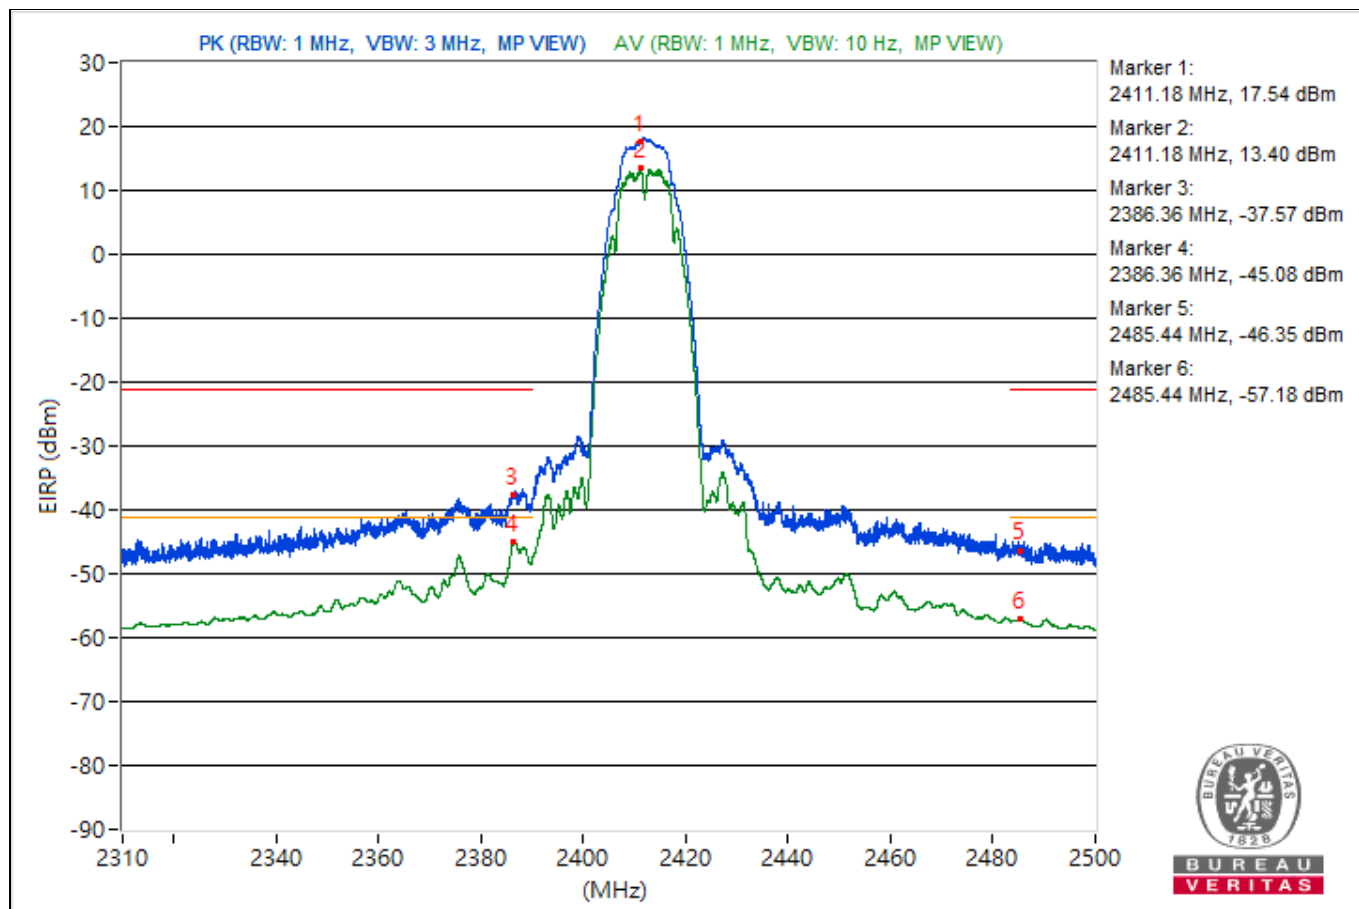


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2439.75	112.29 PK			13.85	3.18	17.03
2	*2439.75	108.68 AV			10.24	3.18	13.42
3	2388.35	53.5 PK	74	-20.5	-44.94	3.18	-41.76
4	2388.35	46.63 AV	54	-7.37	-51.81	3.18	-48.63
5	2485.75	53.73 PK	74	-20.27	-44.71	3.18	-41.53
6	2485.75	44.2 AV	54	-9.8	-54.24	3.18	-51.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

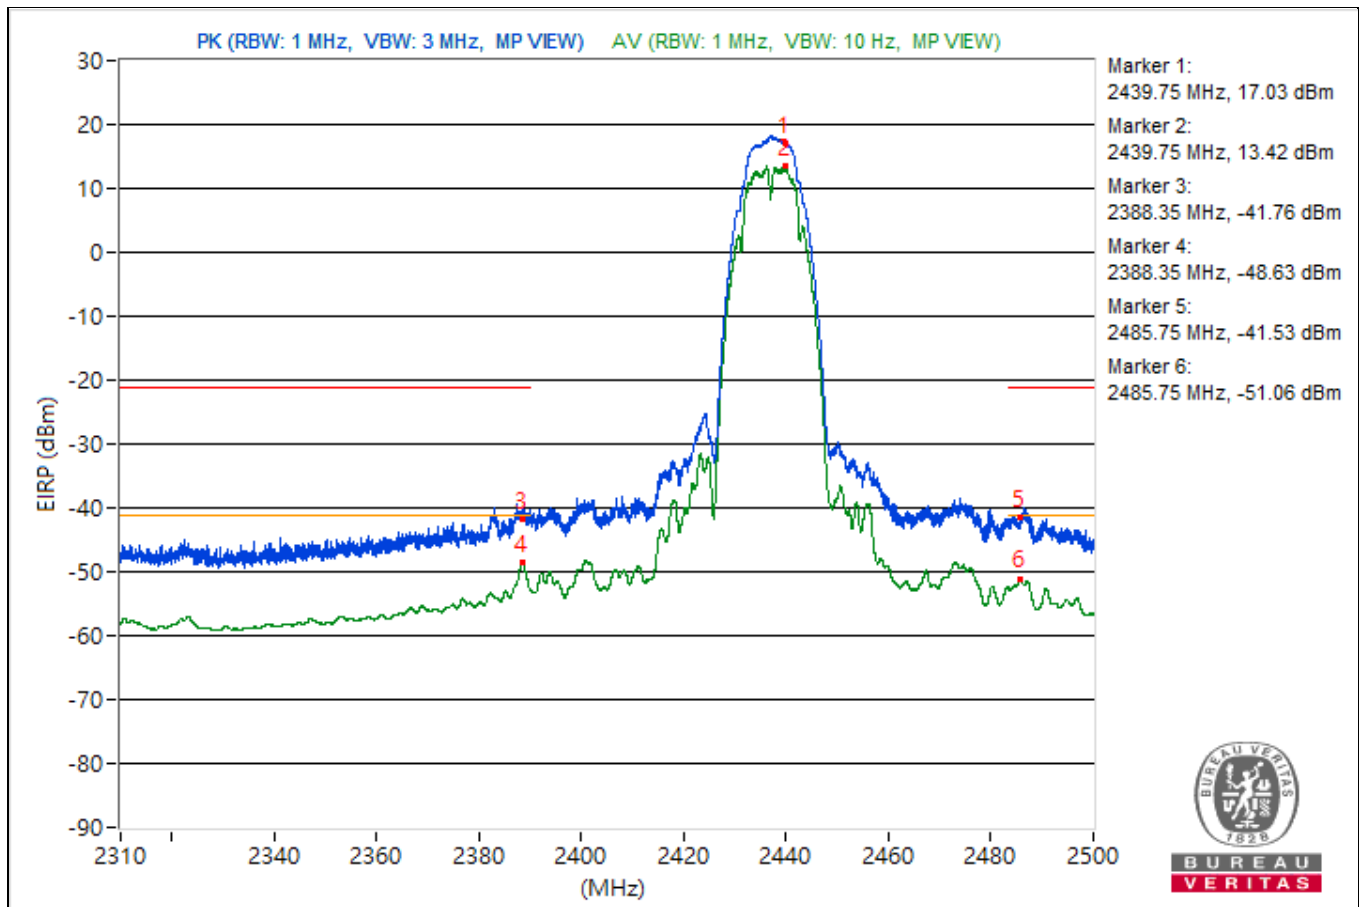


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry HSU		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2461.24	116.14 PK			17.7	3.18	20.88
2	*2461.24	112.57 AV			14.13	3.18	17.31
3	2386.76	50.9 PK	74	-23.1	-47.54	3.18	-44.36
4	2386.76	40.35 AV	54	-13.65	-58.09	3.18	-54.91
5	2488.74	56.11 PK	74	-17.89	-42.33	3.18	-39.15
6	2488.74	48.46 AV	54	-5.54	-49.98	3.18	-46.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

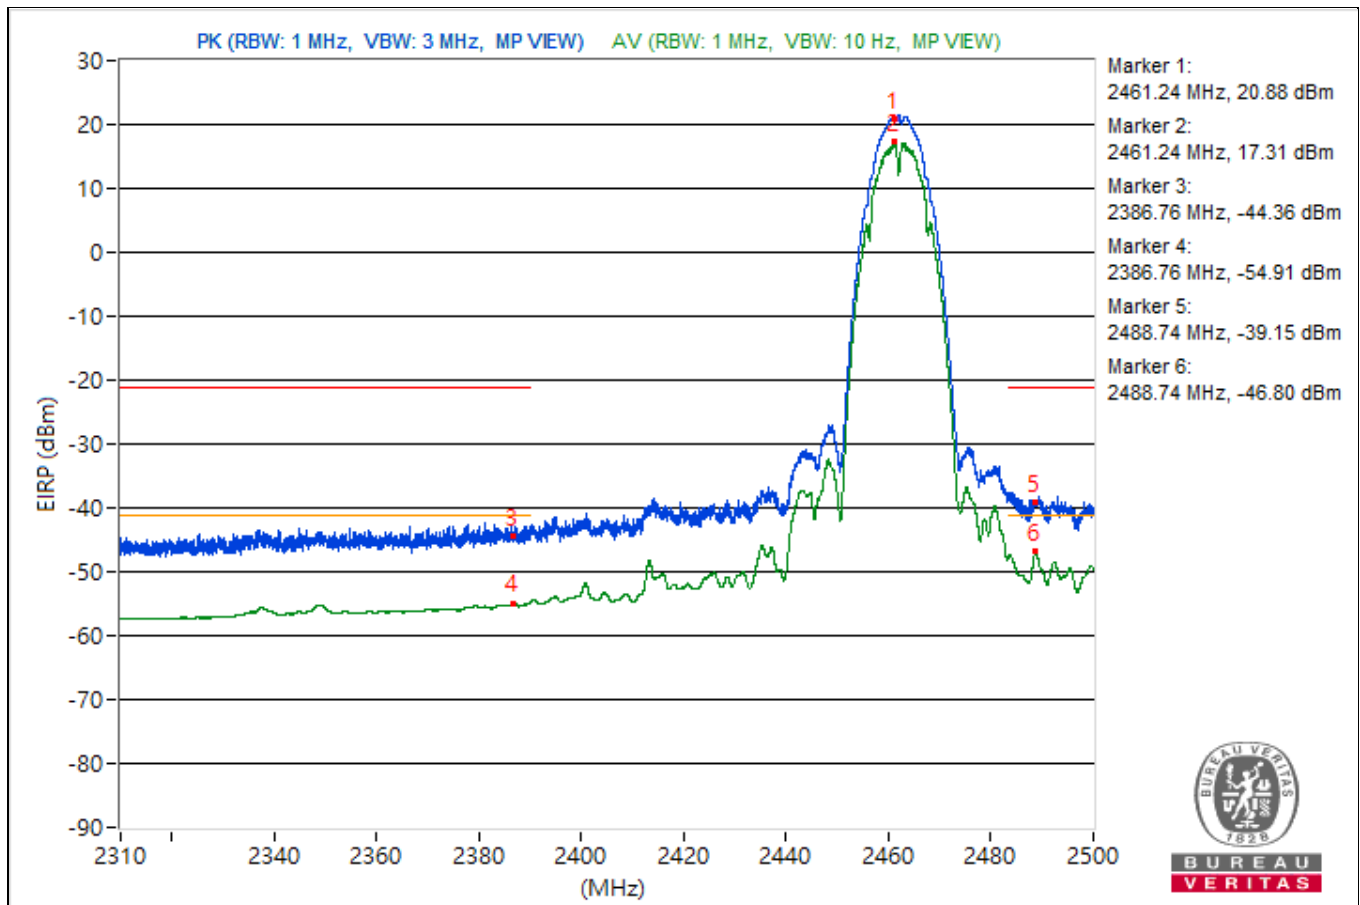


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry HSU		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2466.2	115.54 PK			17.1	3.18	20.28
2	*2466.2	111.93 AV			13.49	3.18	16.67
3	2348.07	51.86 PK	74	-22.14	-46.58	3.18	-43.4
4	2348.07	40.1 AV	54	-13.9	-58.34	3.18	-55.16
5	2483.52	59.9 PK	74	-14.1	-38.54	3.18	-35.36
6	2483.52	51.59 AV	54	-2.41	-46.85	3.18	-43.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

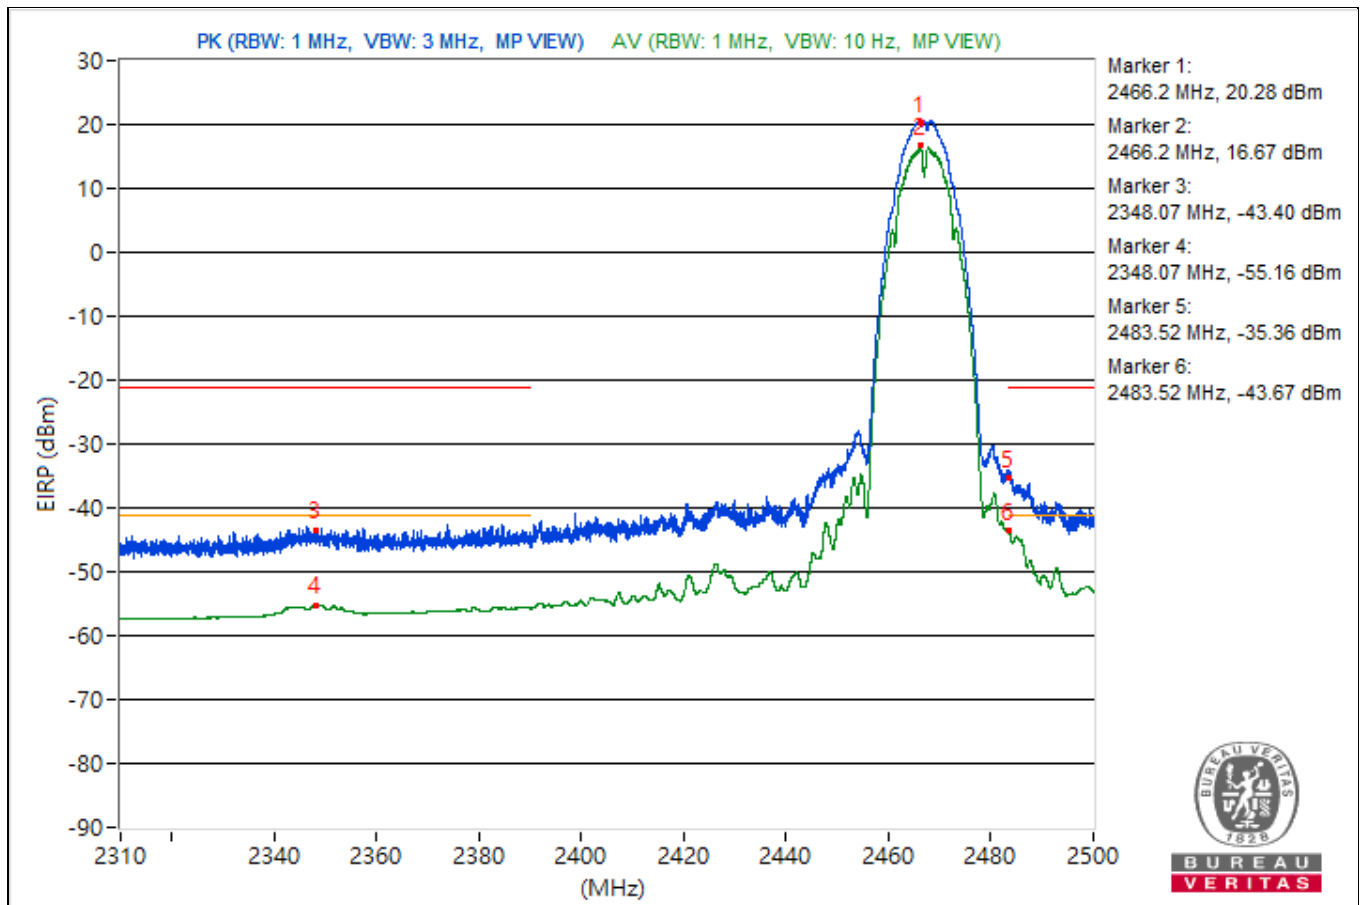


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2471.14	110.67 PK			12.23	3.18	15.41
2	*2471.14	107.02 AV			8.58	3.18	11.76
3	2351.16	49.2 PK	74	-24.8	-49.24	3.18	-46.06
4	2351.16	39.62 AV	54	-14.38	-58.82	3.18	-55.64
5	2485.7	57.89 PK	74	-16.11	-40.55	3.18	-37.37
6	2485.7	52.51 AV	54	-1.49	-45.93	3.18	-42.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

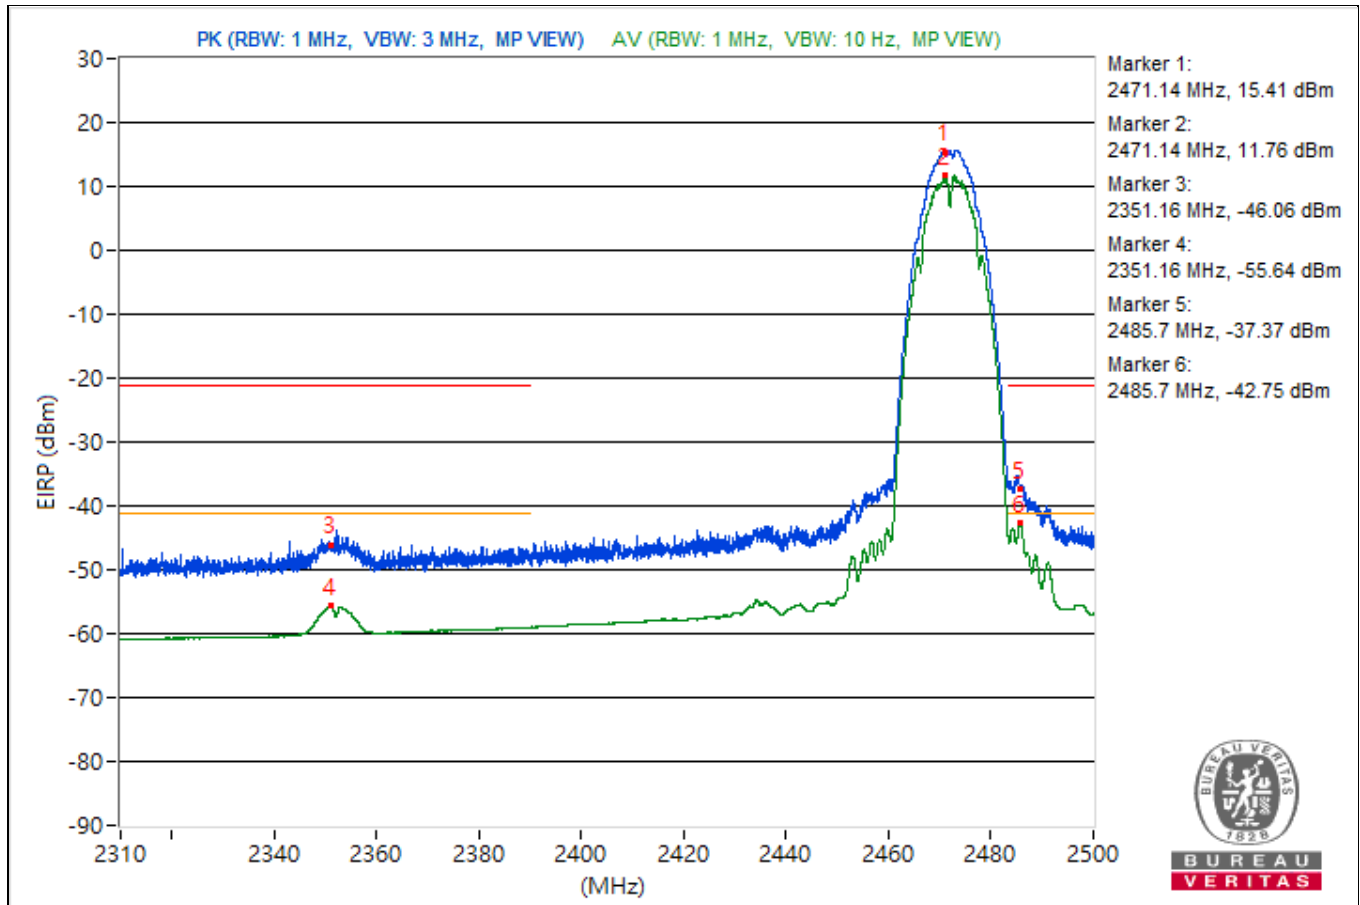


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2413.19	113.25 PK			14.81	3.18	17.99
2	*2413.19	104.08 AV			5.64	3.18	8.82
3	2389.75	61.58 PK	74	-12.42	-36.86	3.18	-33.68
4	2389.75	47.07 AV	54	-6.93	-51.37	3.18	-48.19
5	2483.97	49.53 PK	74	-24.47	-48.91	3.18	-45.73
6	2483.97	37.74 AV	54	-16.26	-60.7	3.18	-57.52

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

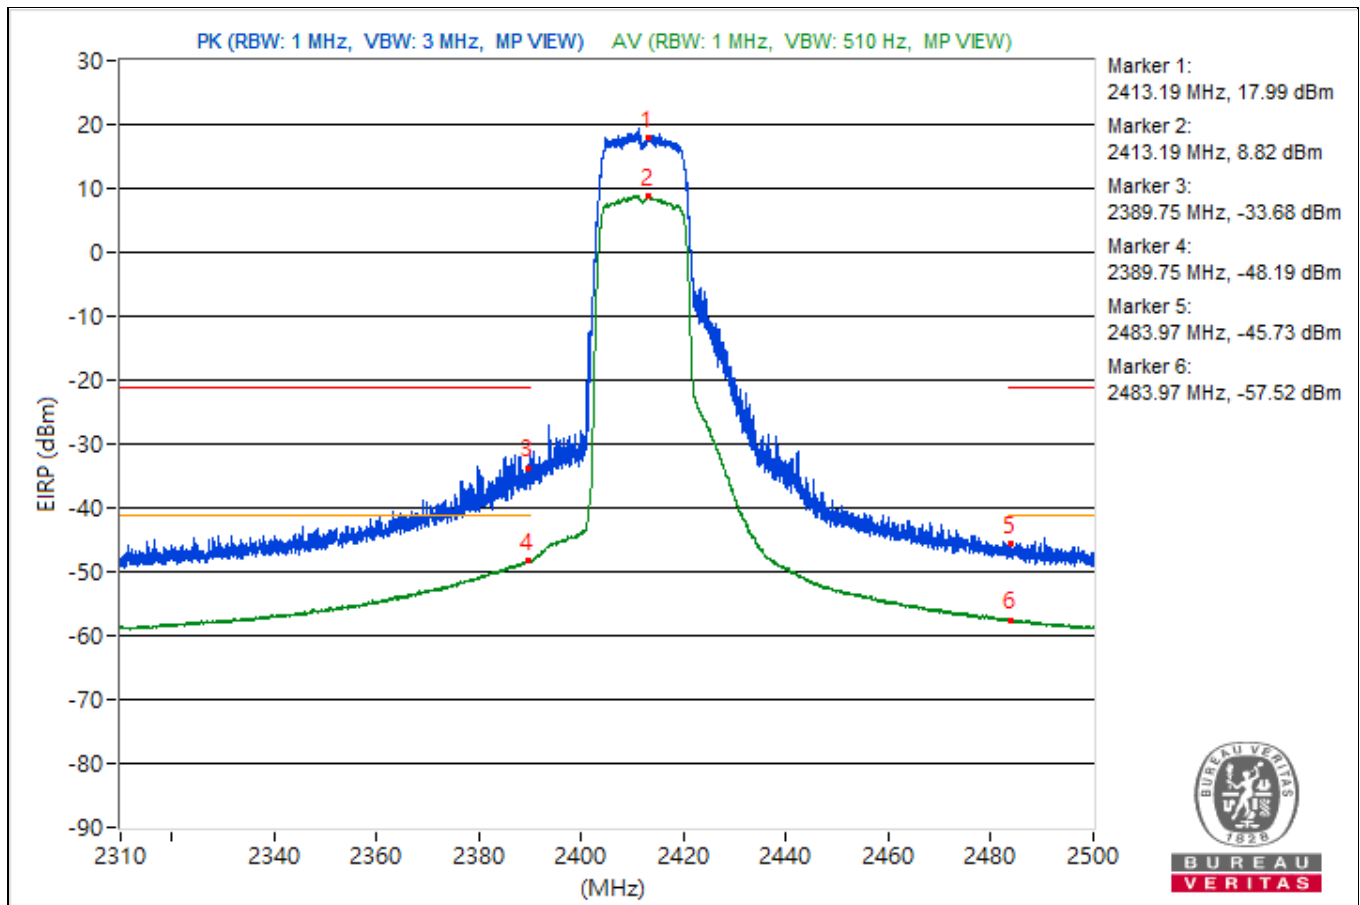


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2438.34	116.91 PK			18.47	3.18	21.65
2	*2438.34	106.37 AV			7.93	3.18	11.11
3	2389.97	60.19 PK	74	-13.81	-38.25	3.18	-35.07
4	2389.97	47.19 AV	54	-6.81	-51.25	3.18	-48.07
5	2483.57	64.4 PK	74	-9.6	-34.04	3.18	-30.86
6	2483.57	48.16 AV	54	-5.84	-50.28	3.18	-47.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

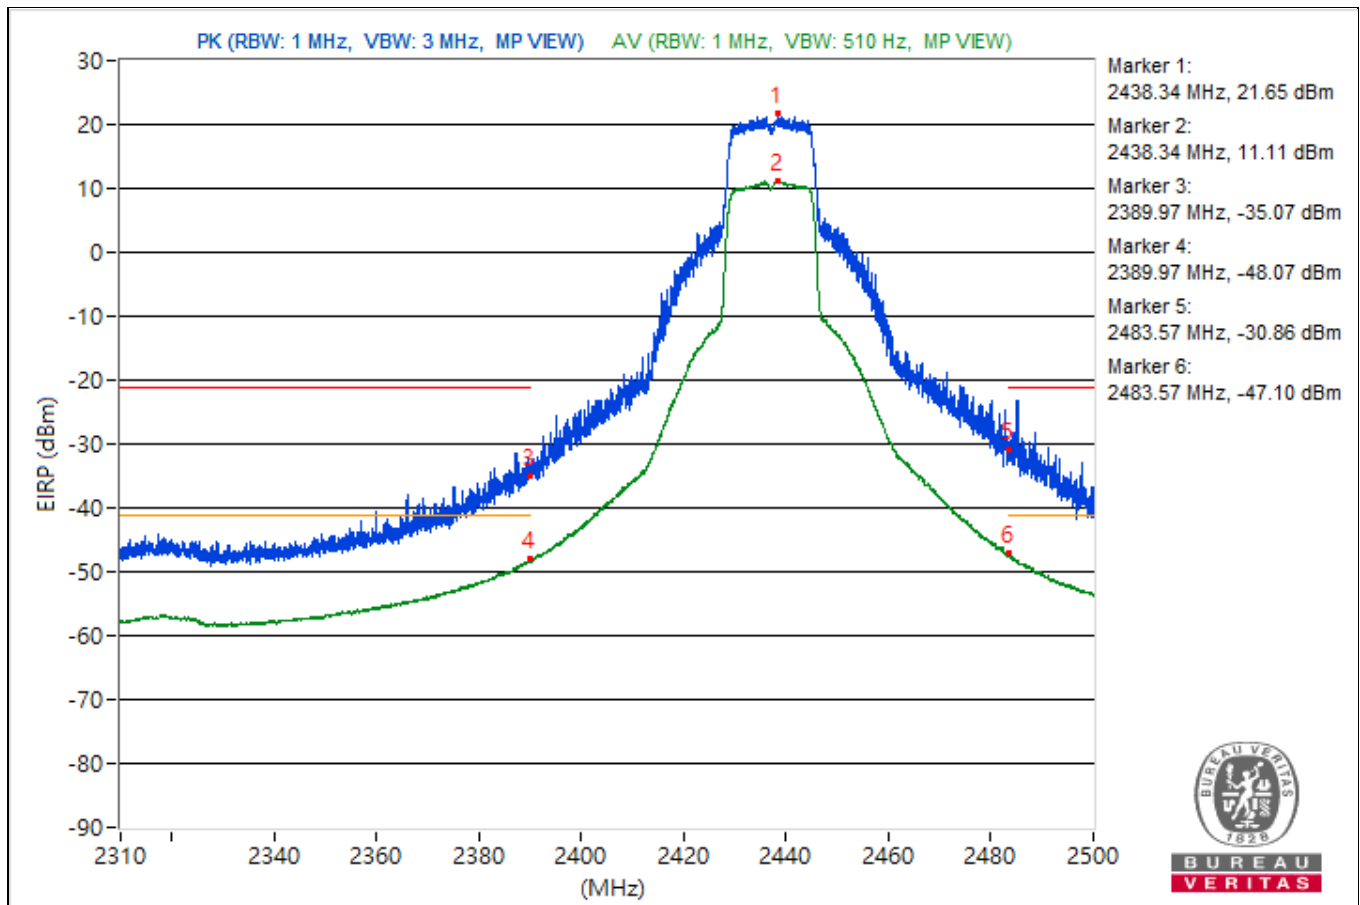


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2463.33	113.89 PK			15.45	3.18	18.63
2	*2463.33	104.57 AV			6.13	3.18	9.31
3	2389.92	49.39 PK	74	-24.61	-49.05	3.18	-45.87
4	2389.92	39.29 AV	54	-14.71	-59.15	3.18	-55.97
5	2483.52	66.32 PK	74	-7.68	-32.12	3.18	-28.94
6	2483.52	48.8 AV	54	-5.2	-49.64	3.18	-46.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

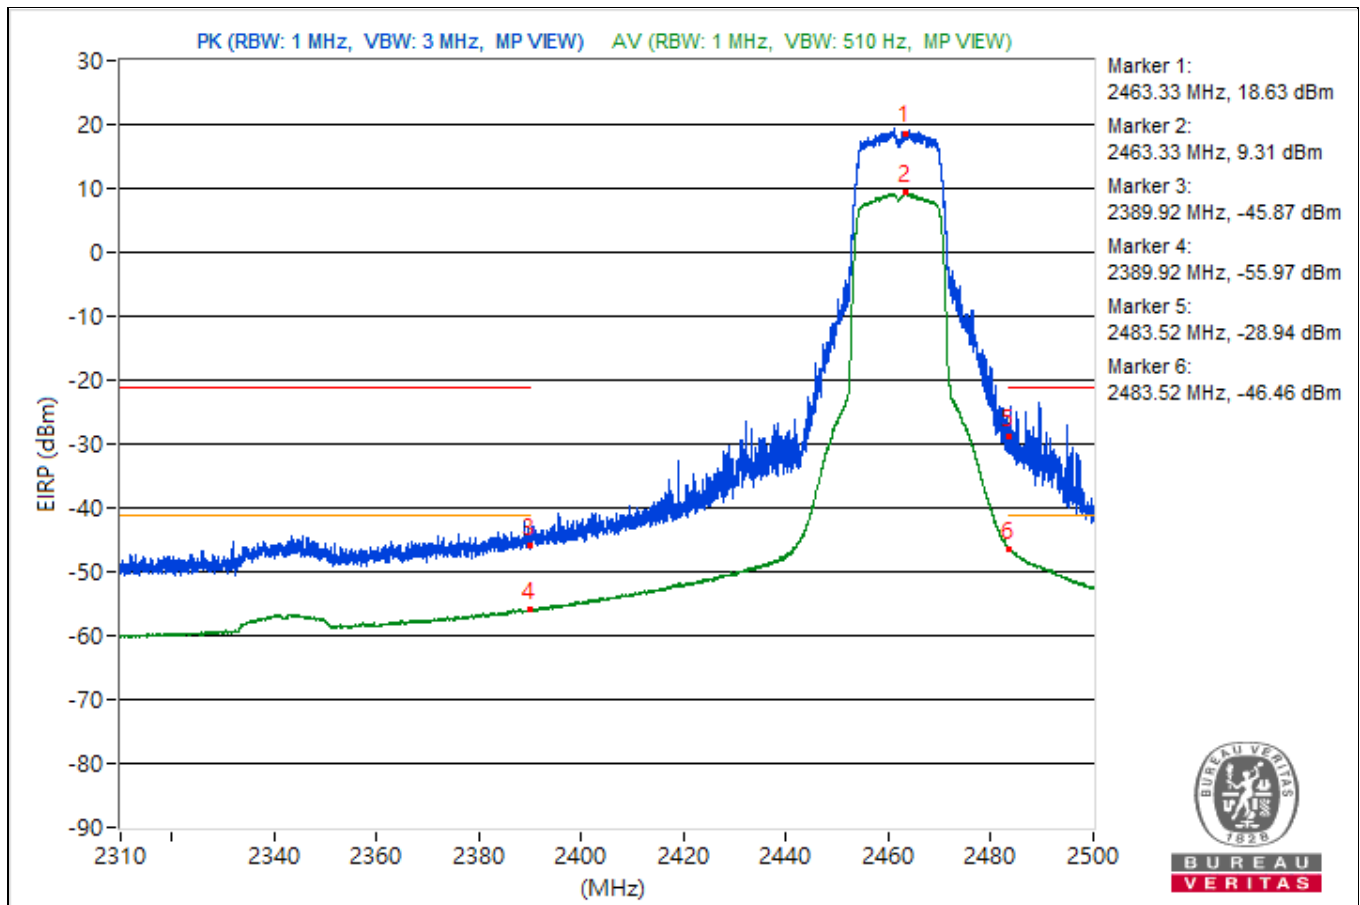


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.32	112.2 PK			13.76	3.18	16.94
2	*2468.32	103.47 AV			5.03	3.18	8.21
3	2348.64	49.01 PK	74	-24.99	-49.43	3.18	-46.25
4	2348.64	38.03 AV	54	-15.97	-60.41	3.18	-57.23
5	2483.52	64.67 PK	74	-9.33	-33.77	3.18	-30.59
6	2483.52	51.76 AV	54	-2.24	-46.68	3.18	-43.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

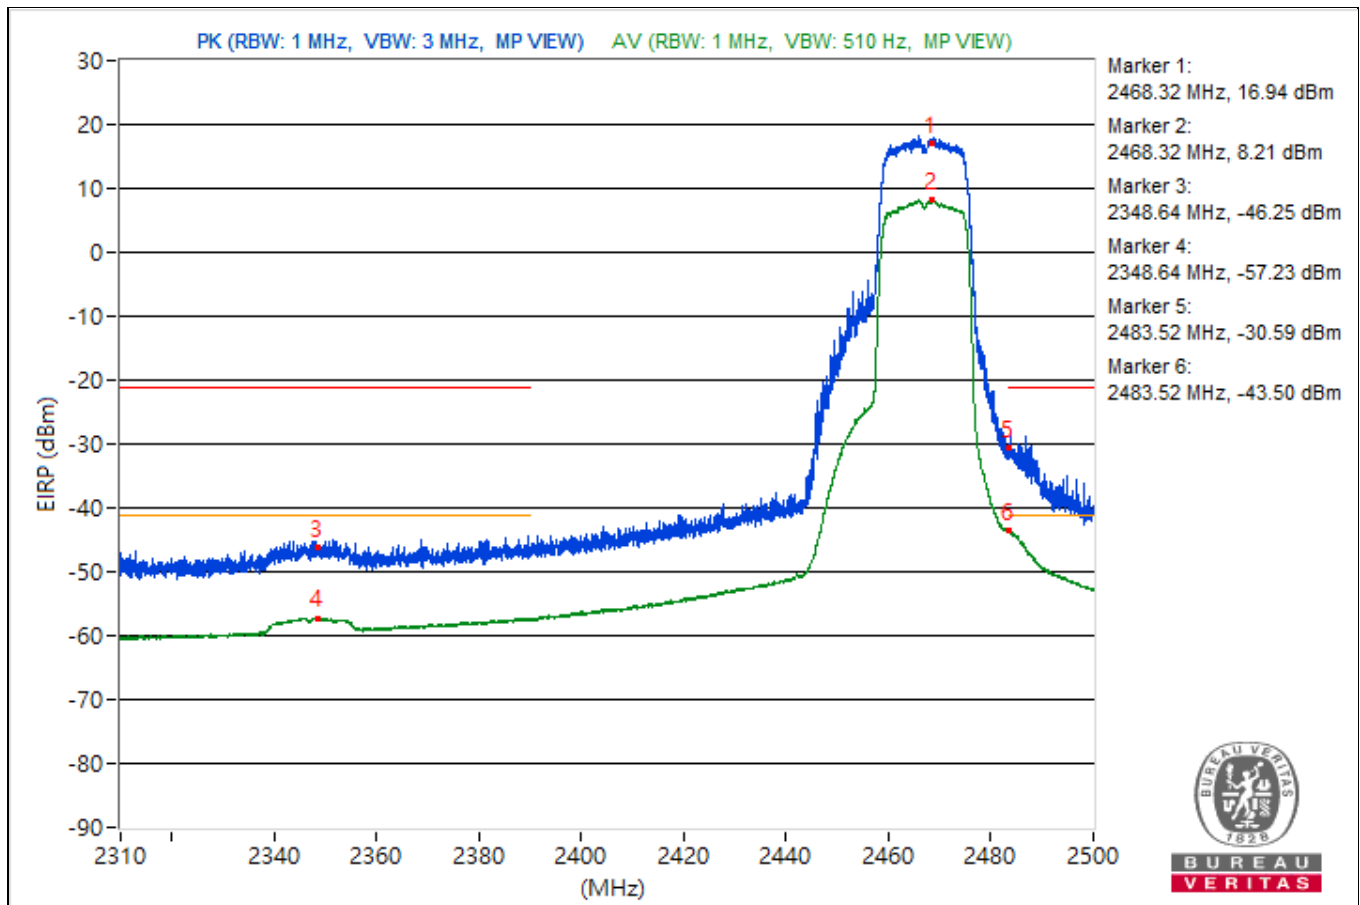


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.11	112.26 PK			13.82	3.18	17
2	*2473.11	103.05 AV			4.61	3.18	7.79
3	2353.49	49.05 PK	74	-24.95	-49.39	3.18	-46.21
4	2353.49	38 AV	54	-16	-60.44	3.18	-57.26
5	2484.04	63.56 PK	74	-10.44	-34.88	3.18	-31.7
6	2484.04	52.31 AV	54	-1.69	-46.13	3.18	-42.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

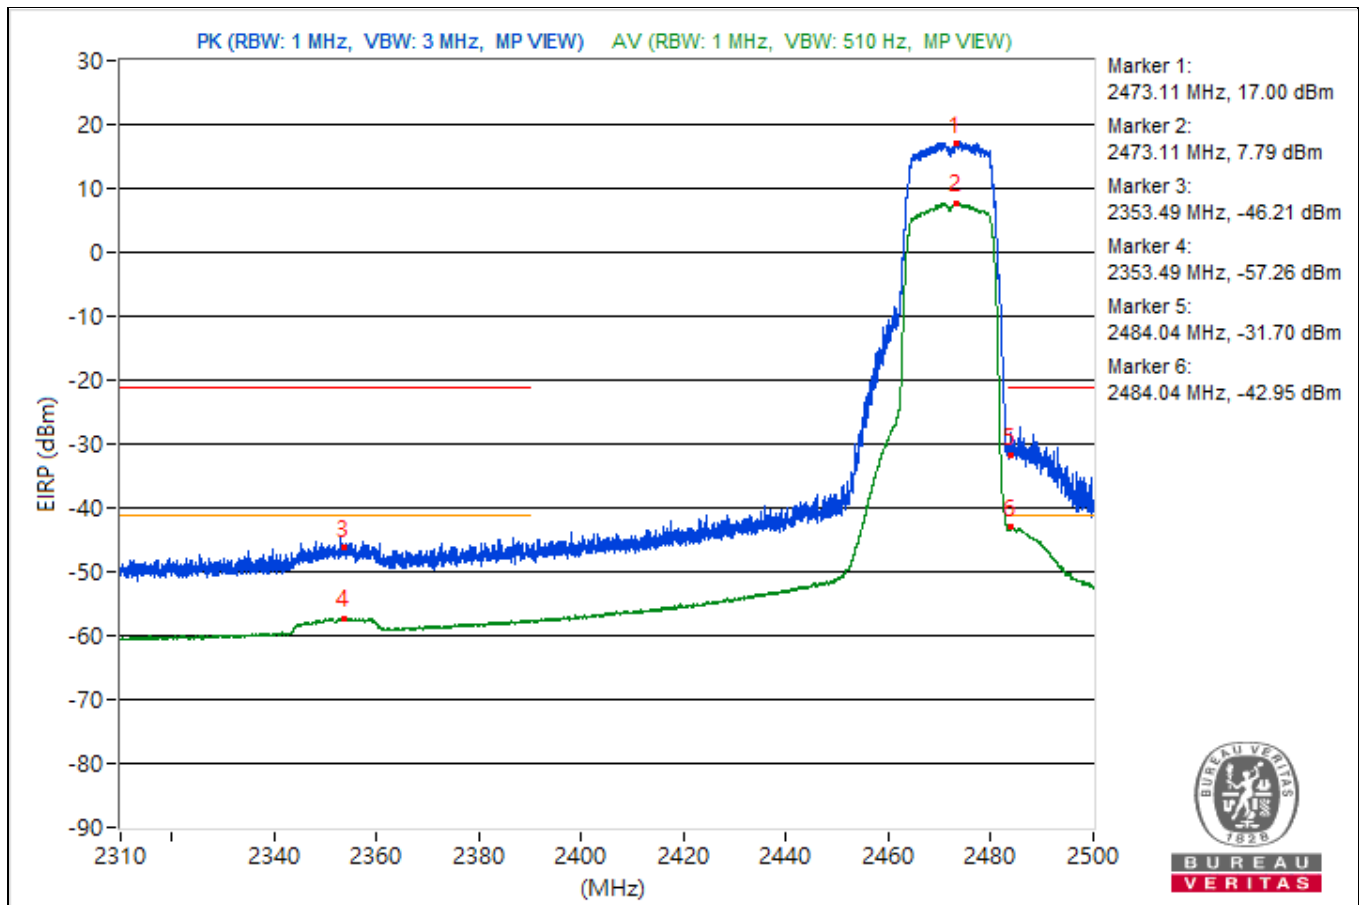


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.87	114.54 PK			16.1	3.18	19.28
2	*2410.87	102.46 AV			4.02	3.18	7.2
3	2389.97	59.56 PK	74	-14.44	-38.88	3.18	-35.7
4	2389.97	46.16 AV	54	-7.84	-52.28	3.18	-49.1
5	2483.66	48.26 PK	74	-25.74	-50.18	3.18	-47
6	2483.66	37.28 AV	54	-16.72	-61.16	3.18	-57.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

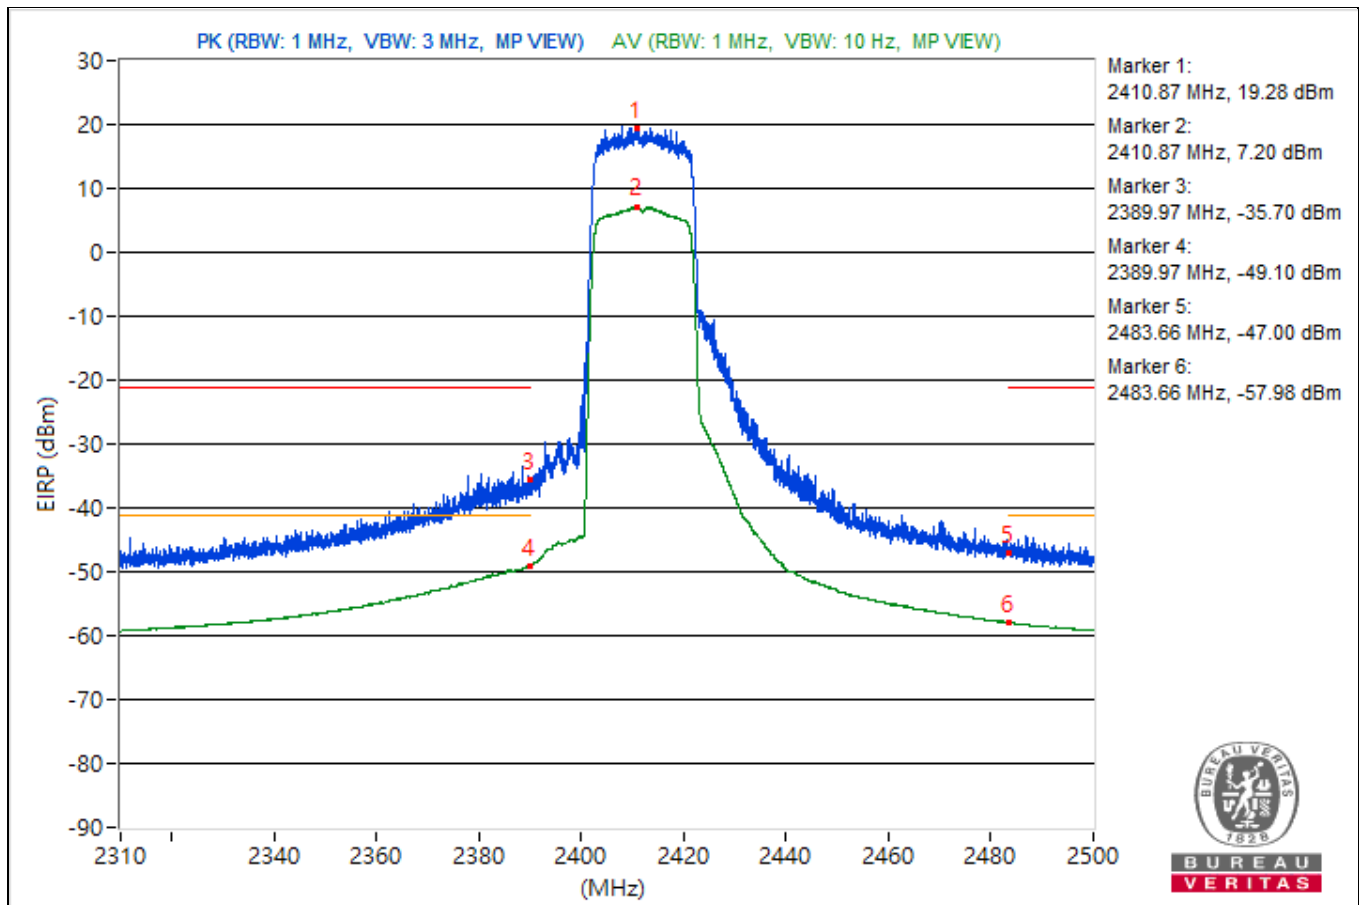


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2438.04	115.32 PK			16.88	3.18	20.06
2	*2438.04	104.9 AV			6.46	3.18	9.64
3	2389.97	62 PK	74	-12	-36.44	3.18	-33.26
4	2389.97	47.03 AV	54	-6.97	-51.41	3.18	-48.23
5	2483.52	67.14 PK	74	-6.86	-31.3	3.18	-28.12
6	2483.52	48.32 AV	54	-5.68	-50.12	3.18	-46.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

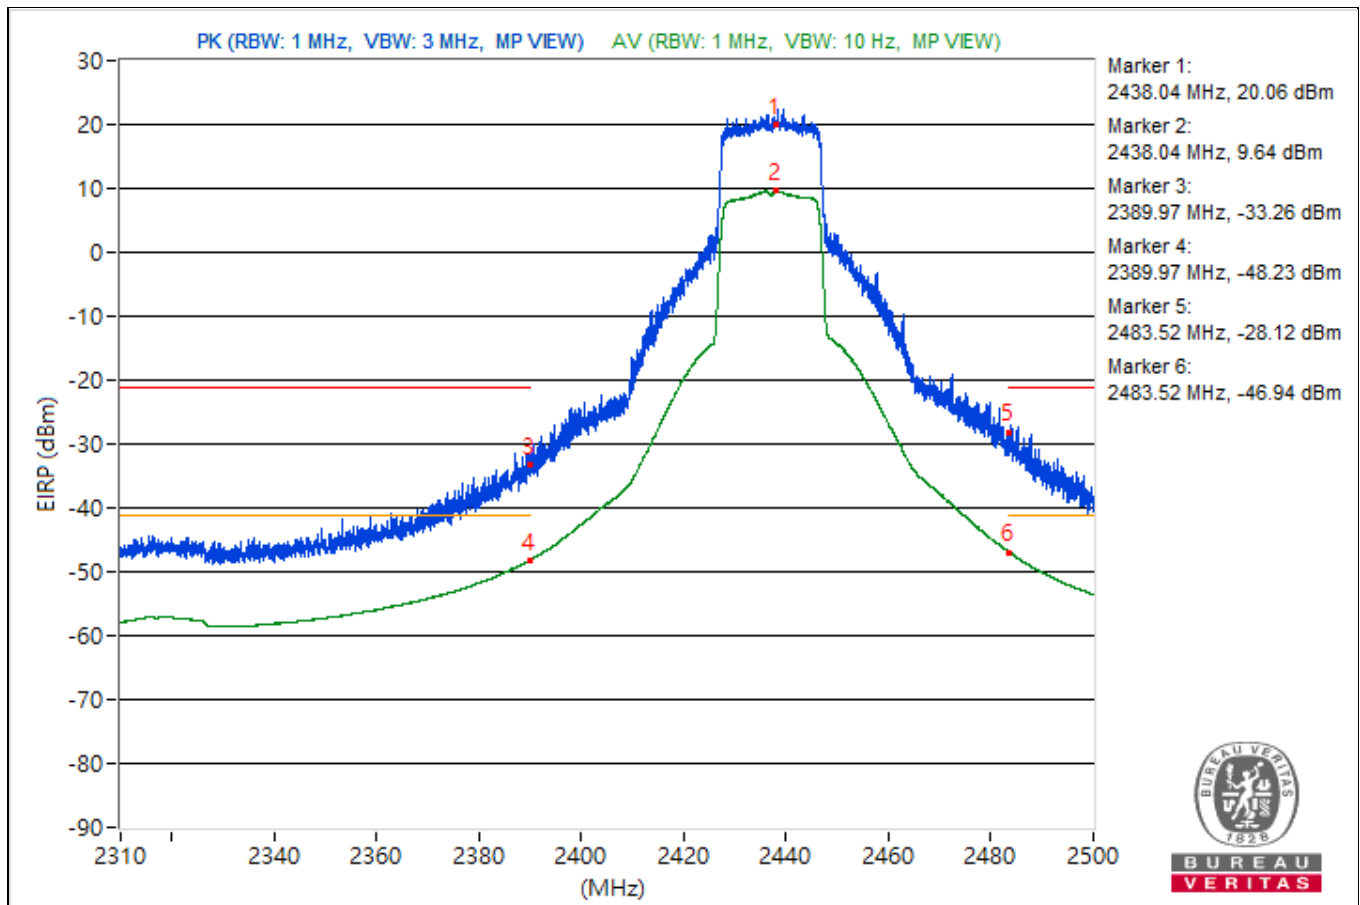


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2463.21	113.85 PK			15.41	3.18	18.59
2	*2463.21	102.96 AV			4.52	3.18	7.7
3	2389.92	50.89 PK	74	-23.11	-47.55	3.18	-44.37
4	2389.92	38.74 AV	54	-15.26	-59.7	3.18	-56.52
5	2483.57	65.53 PK	74	-8.47	-32.91	3.18	-29.73
6	2483.57	49.26 AV	54	-4.74	-49.18	3.18	-46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

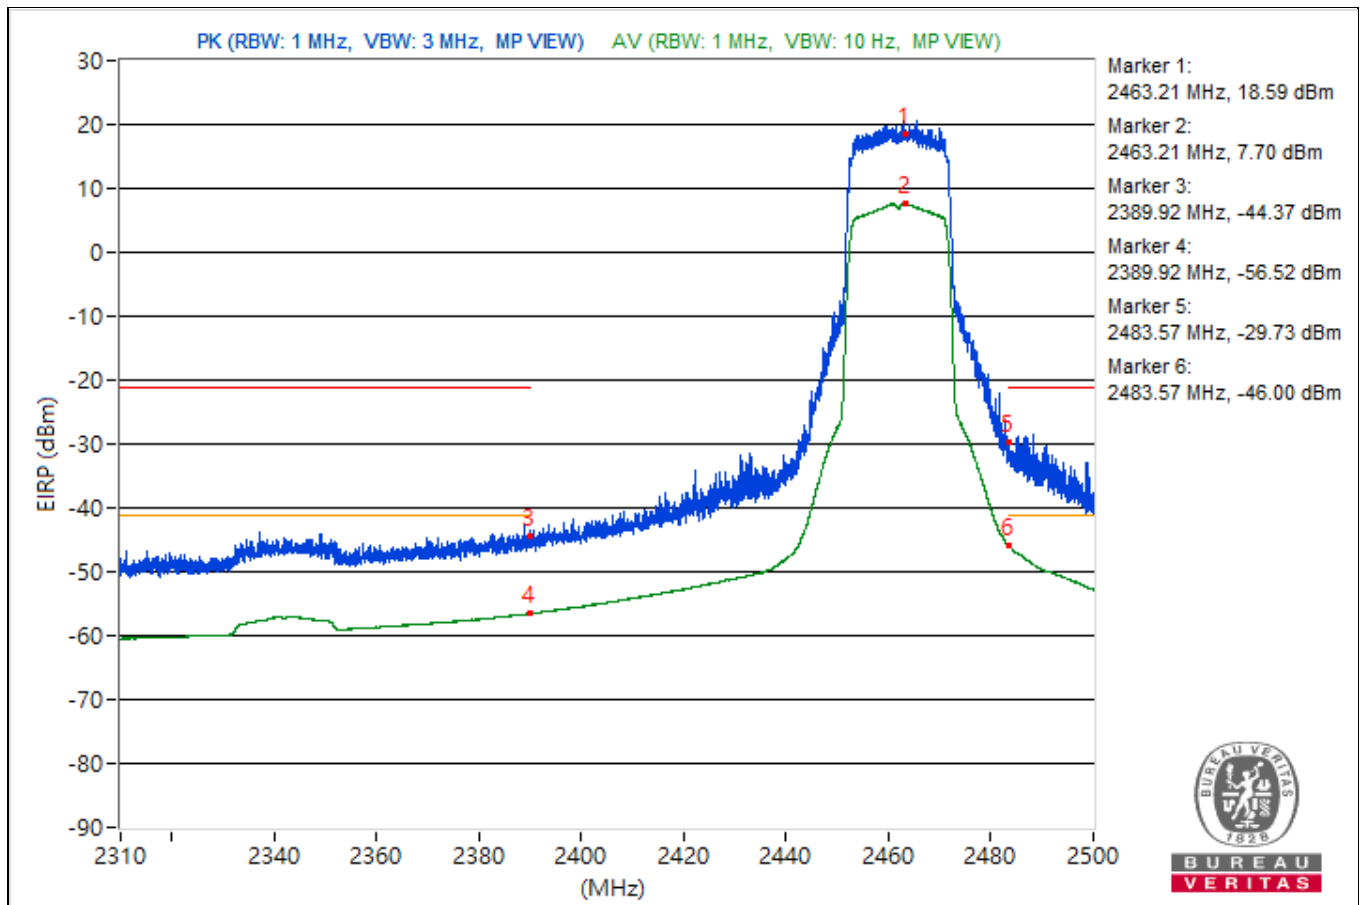


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2465.94	113.46 PK			15.02	3.18	18.2
2	*2465.94	102.09 AV			3.65	3.18	6.83
3	2347.93	48.93 PK	74	-25.07	-49.51	3.18	-46.33
4	2347.93	37.91 AV	54	-16.09	-60.53	3.18	-57.35
5	2483.57	68.24 PK	74	-5.76	-30.2	3.18	-27.02
6	2483.57	52.13 AV	54	-1.87	-46.31	3.18	-43.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

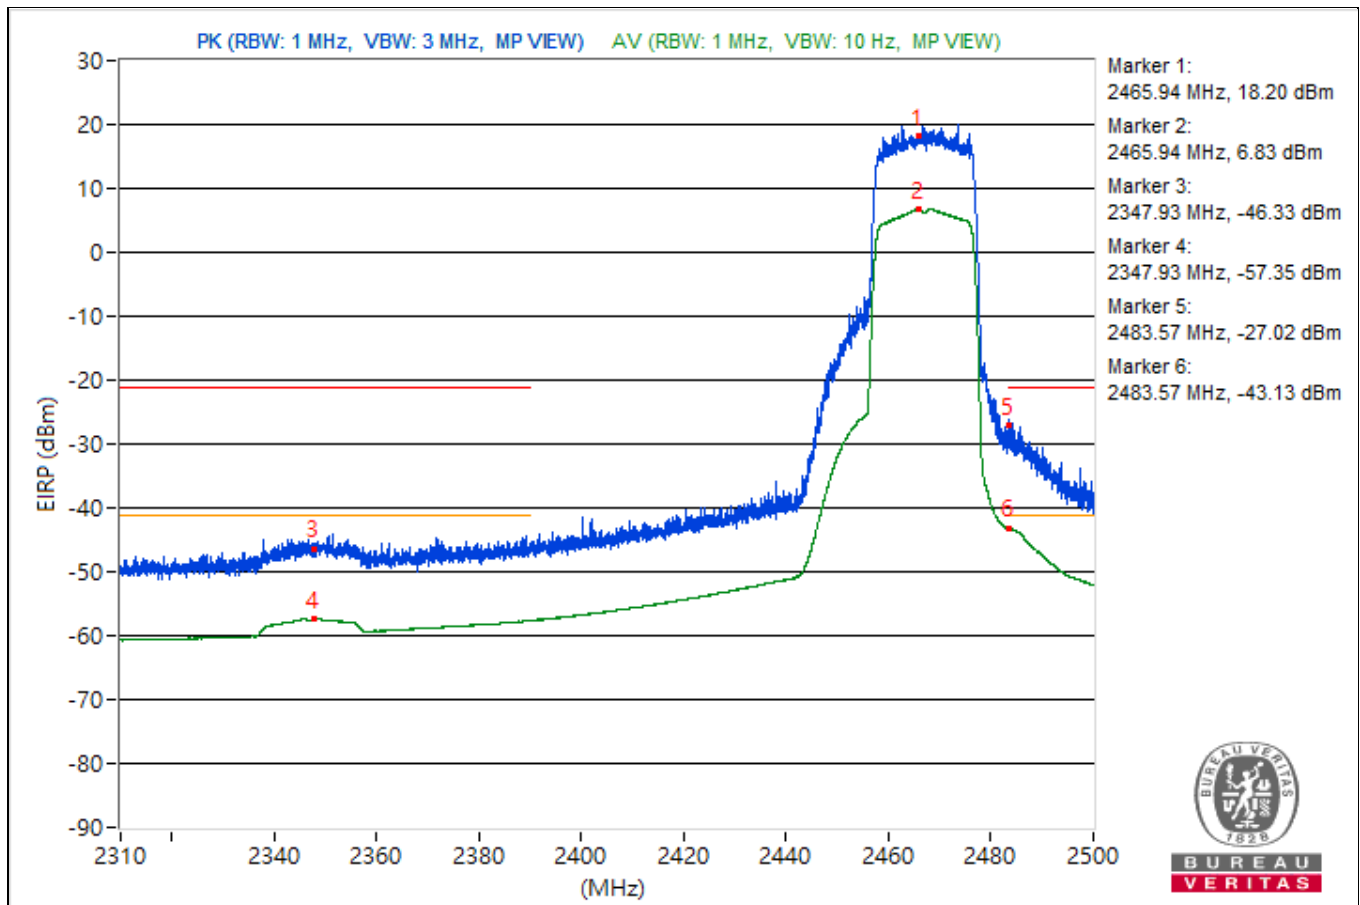


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.26	112.5 PK			14.06	3.18	17.24
2	*2473.26	102.11 AV			3.67	3.18	6.85
3	2353.03	50.05 PK	74	-23.95	-48.39	3.18	-45.21
4	2353.03	37.96 AV	54	-16.04	-60.48	3.18	-57.3
5	2483.52	66.37 PK	74	-7.63	-32.07	3.18	-28.89
6	2483.52	52.93 AV	54	-1.07	-45.51	3.18	-42.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

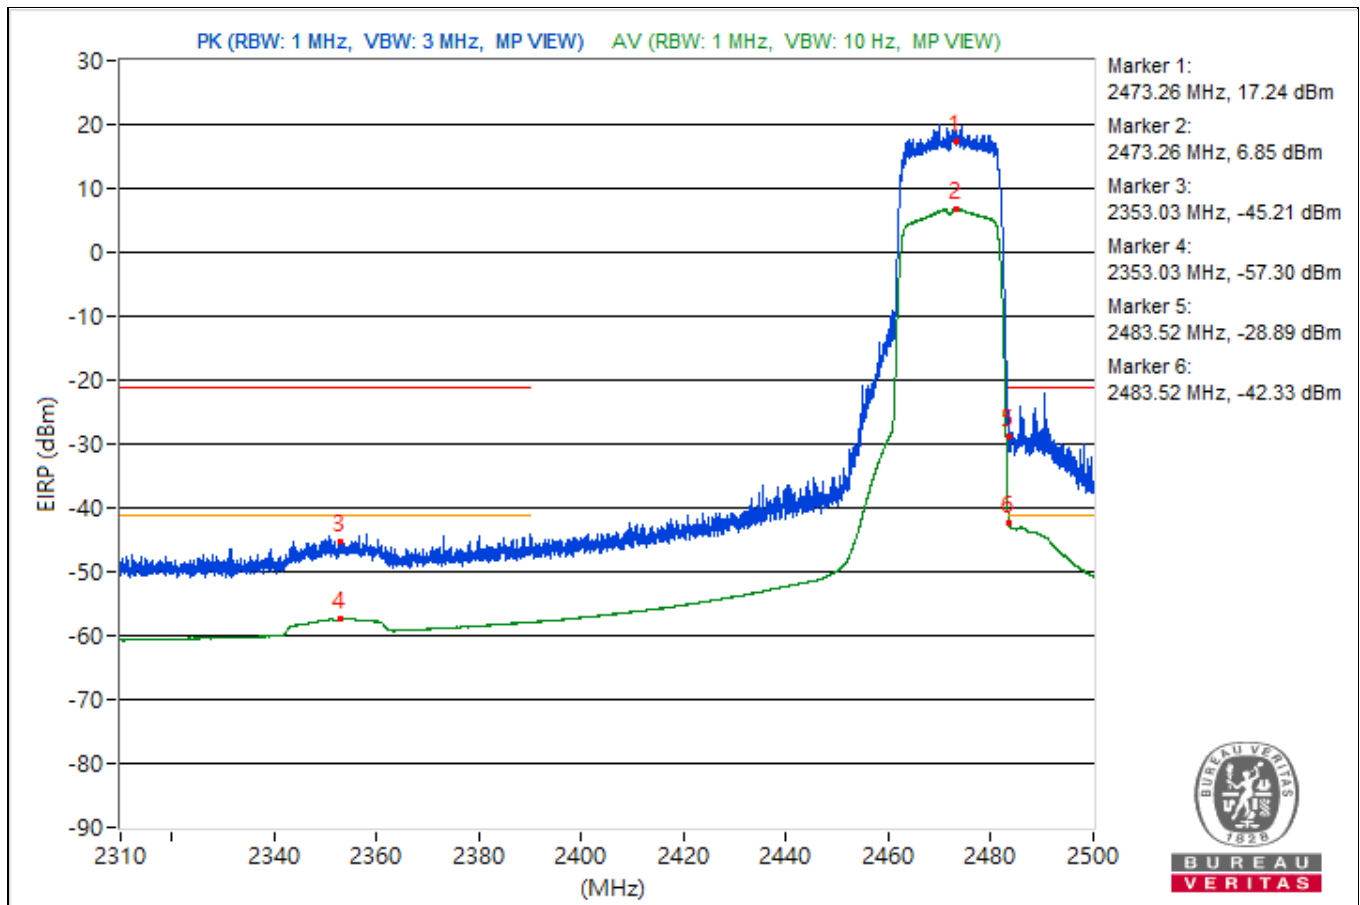


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2423.57	112.53 PK			14.09	3.18	17.27
2	*2423.57	100.43 AV			1.99	3.18	5.17
3	2388.99	65.27 PK	74	-8.73	-33.17	3.18	-29.99
4	2388.99	48.21 AV	54	-5.79	-50.23	3.18	-47.05
5	2483.52	57.79 PK	74	-16.21	-40.65	3.18	-37.47
6	2483.52	44.9 AV	54	-9.1	-53.54	3.18	-50.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

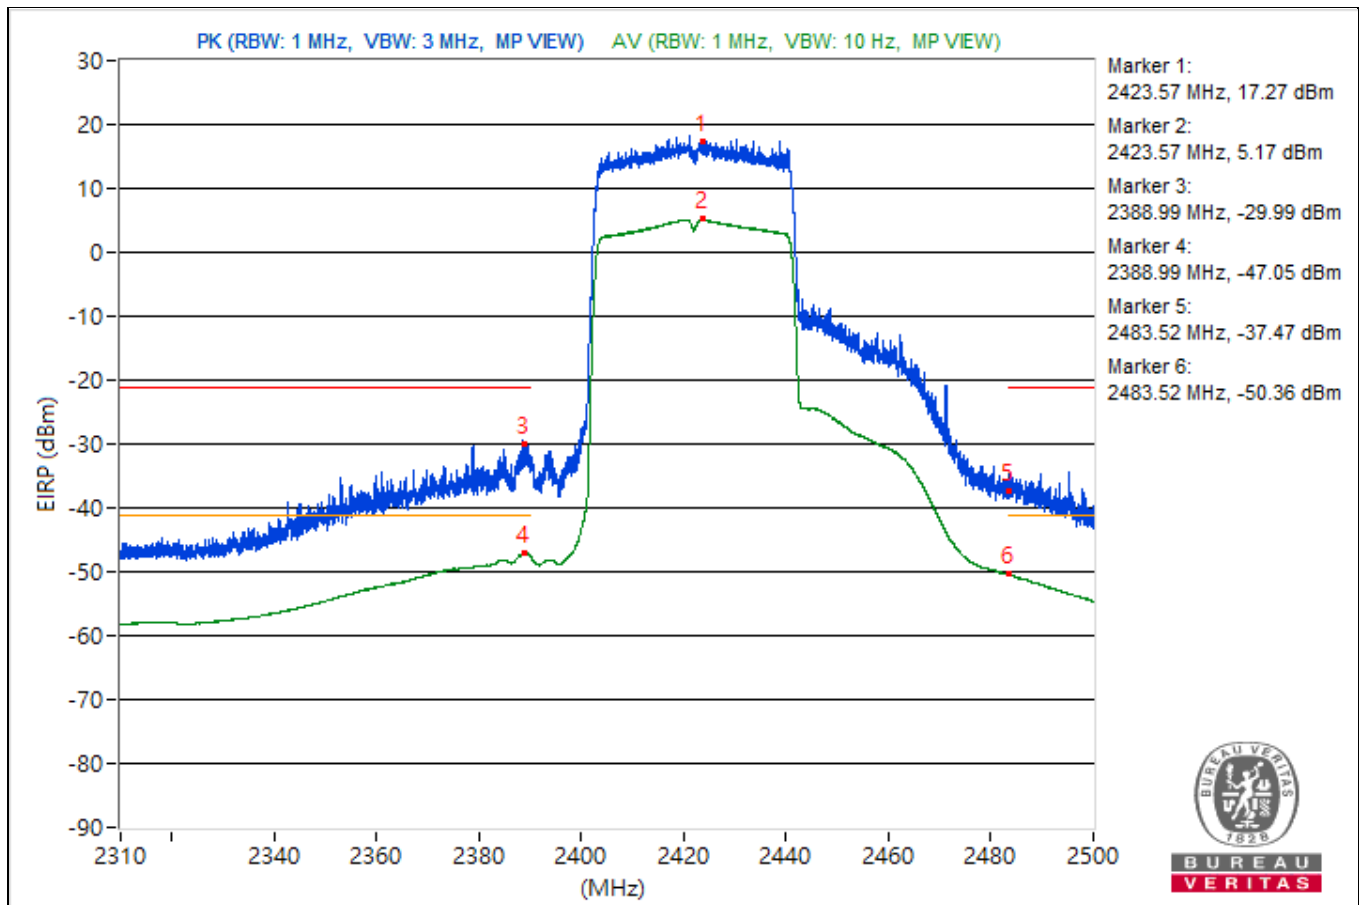


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2438.51	112.91 PK			14.47	3.18	17.65
2	*2438.51	101.42 AV			2.98	3.18	6.16
3	2389.75	66.95 PK	74	-7.05	-31.49	3.18	-28.31
4	2389.75	50.25 AV	54	-3.75	-48.19	3.18	-45.01
5	2483.54	69.79 PK	74	-4.21	-28.65	3.18	-25.47
6	2483.54	53.98 AV	54	-0.02	-44.46	3.18	-41.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

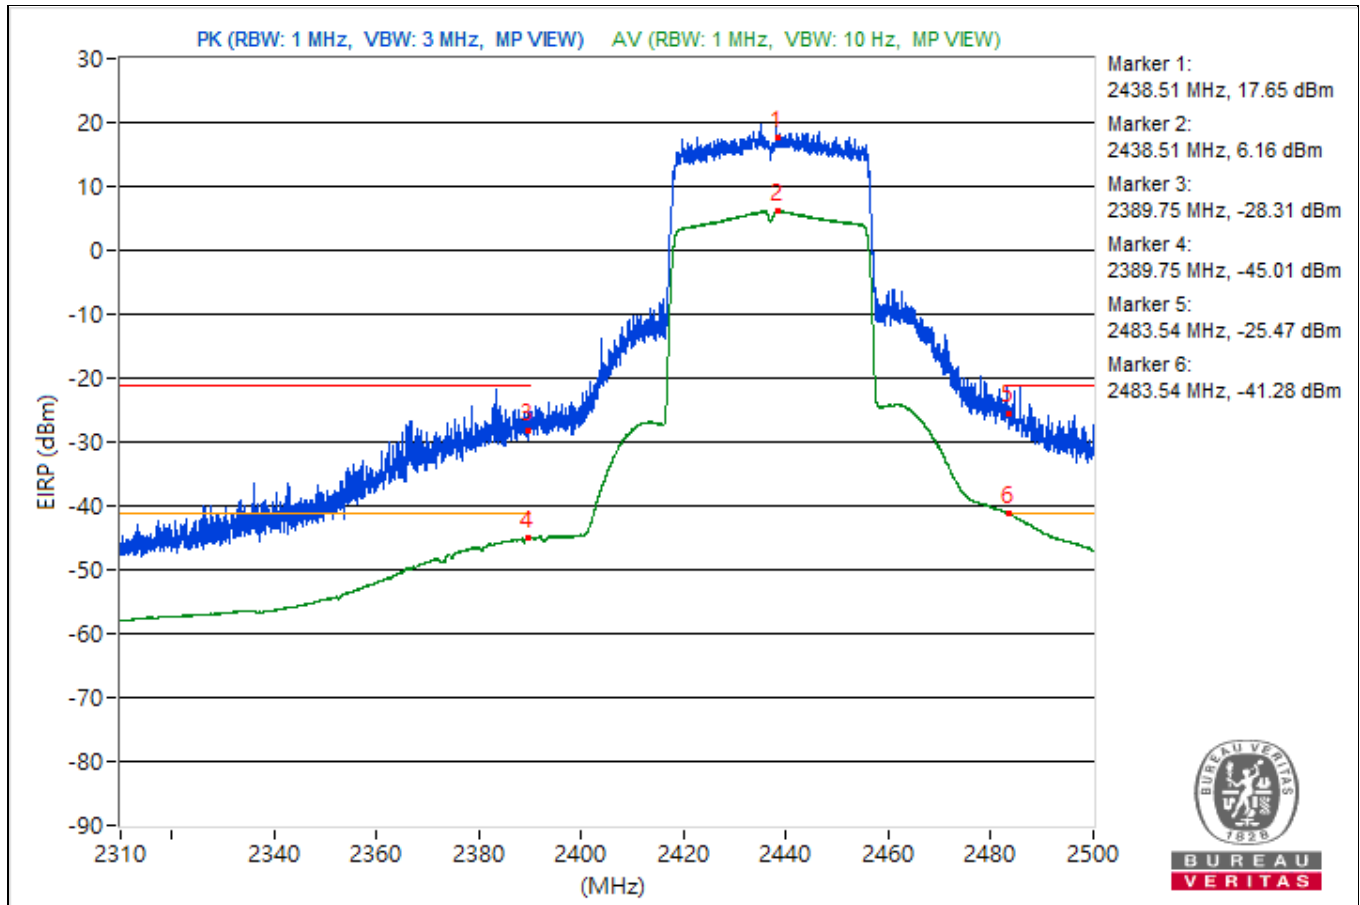


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry HSU		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2453.33	111.91 PK			13.47	3.18	16.65
2	*2453.33	101 AV			2.56	3.18	5.74
3	2389.89	55.51 PK	74	-18.49	-42.93	3.18	-39.75
4	2389.89	43.22 AV	54	-10.78	-55.22	3.18	-52.04
5	2485.61	65.81 PK	74	-8.19	-32.63	3.18	-29.45
6	2485.61	51.73 AV	54	-2.27	-46.71	3.18	-43.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

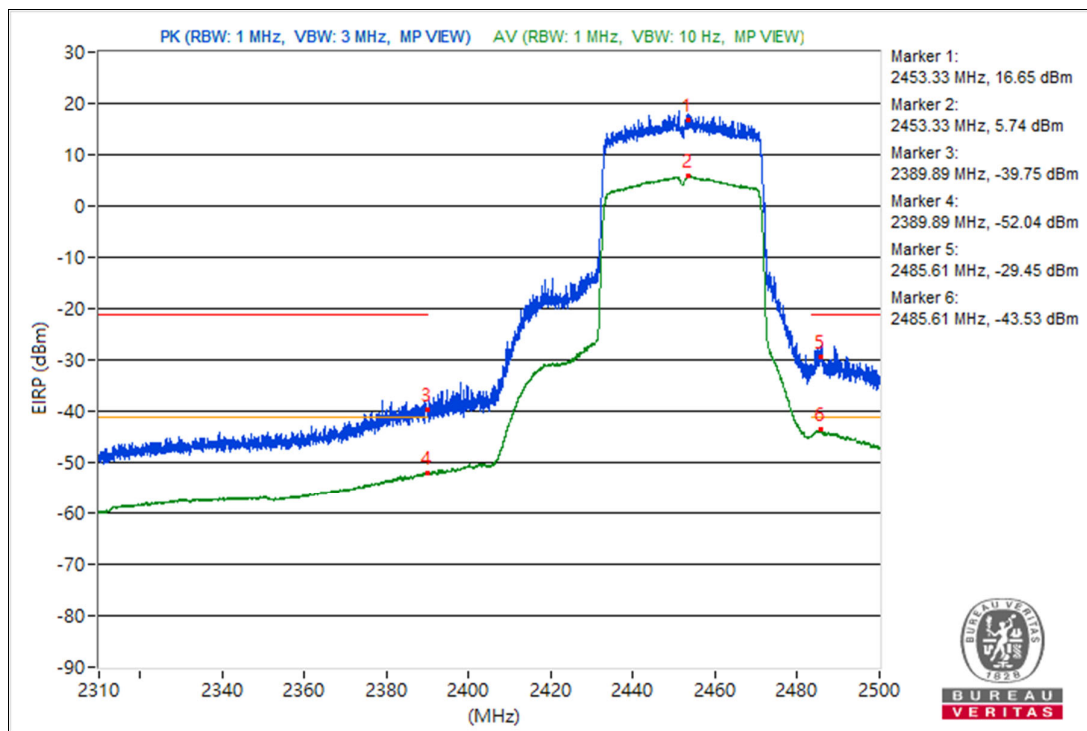


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry HSU		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2455.87	110.45 PK			12.01	3.18	15.19
2	*2455.87	100.52 AV			2.08	3.18	5.26
3	2389.59	52.73 PK	74	-21.27	-45.71	3.18	-42.53
4	2389.59	41.37 AV	54	-12.63	-57.07	3.18	-53.89
5	2489.98	65.06 PK	74	-8.94	-33.38	3.18	-30.2
6	2489.98	51.78 AV	54	-2.22	-46.66	3.18	-43.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

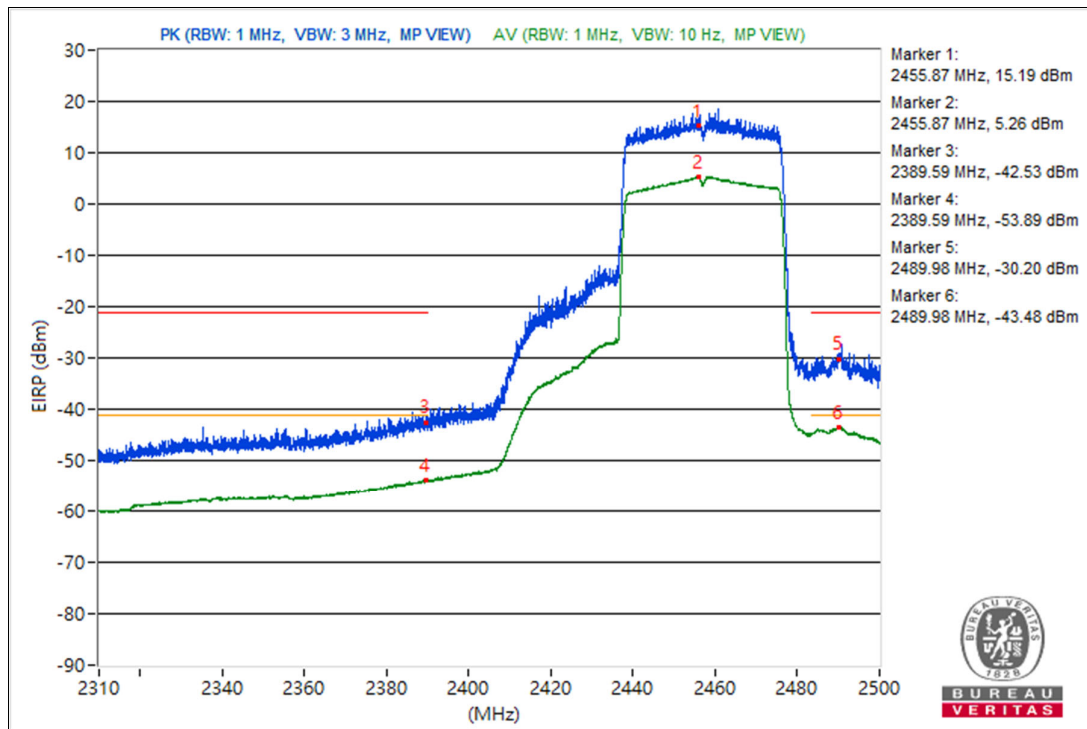


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2463.21	109.5 PK			11.06	3.18	14.24
2	*2463.21	98.59 AV			0.15	3.18	3.33
3	2389.97	50.87 PK	74	-23.13	-47.57	3.18	-44.39
4	2389.97	39.46 AV	54	-14.54	-58.98	3.18	-55.8
5	2490.14	61.93 PK	74	-12.07	-36.51	3.18	-33.33
6	2490.14	50.59 AV	54	-3.41	-47.85	3.18	-44.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

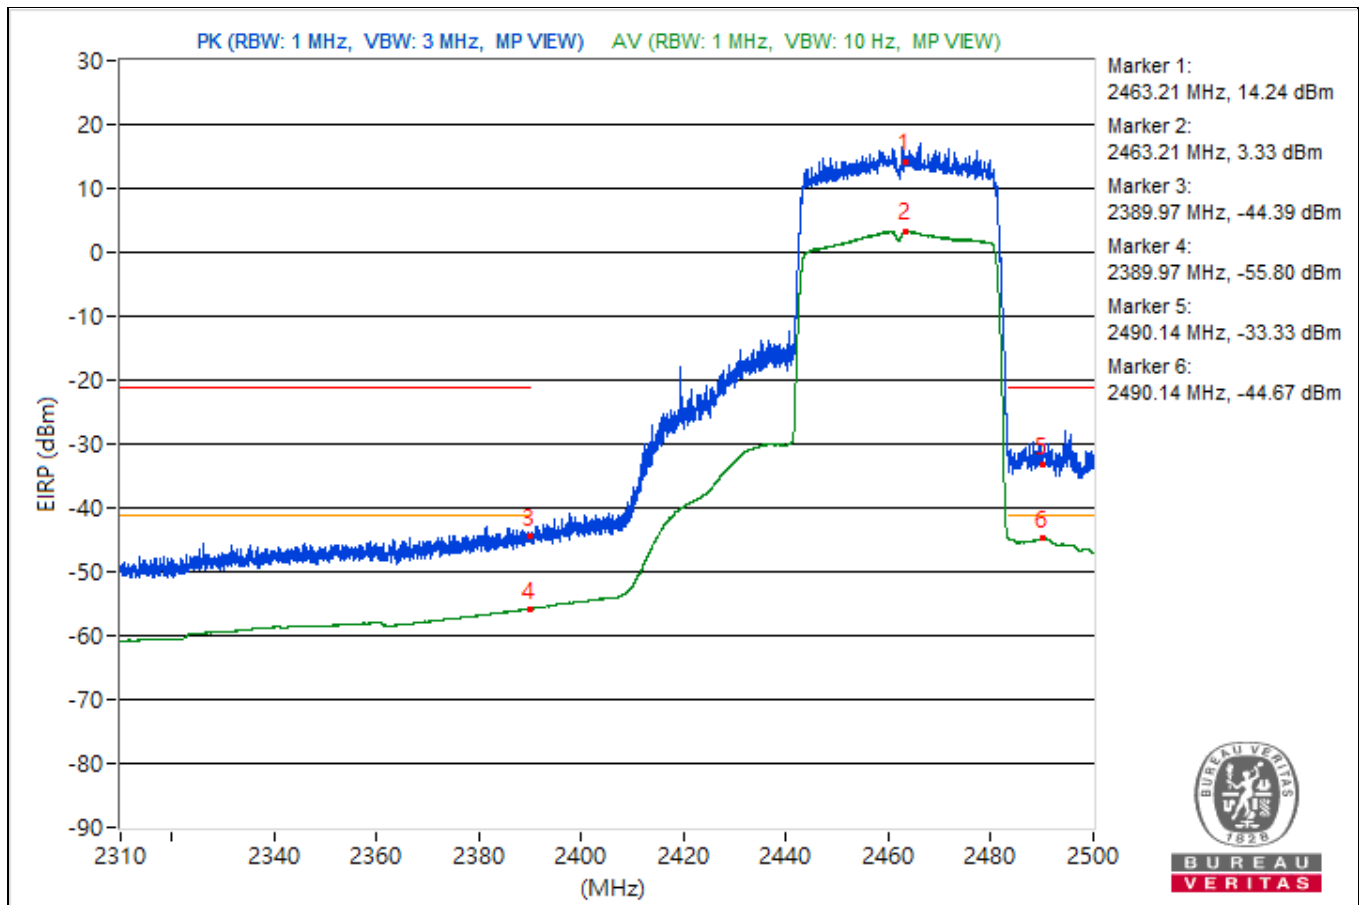


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2403.88	121.98 PK			23.54	3.18	26.72
2	*2403.88	112.85 AV			14.41	3.18	17.59
3	2387.64	63.6 PK	74	-10.4	-34.84	3.18	-31.66
4	2387.64	46.7 AV	54	-7.3	-51.74	3.18	-48.56
5	2484.25	52.79 PK	74	-21.21	-45.65	3.18	-42.47
6	2484.25	40.88 AV	54	-13.12	-57.56	3.18	-54.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

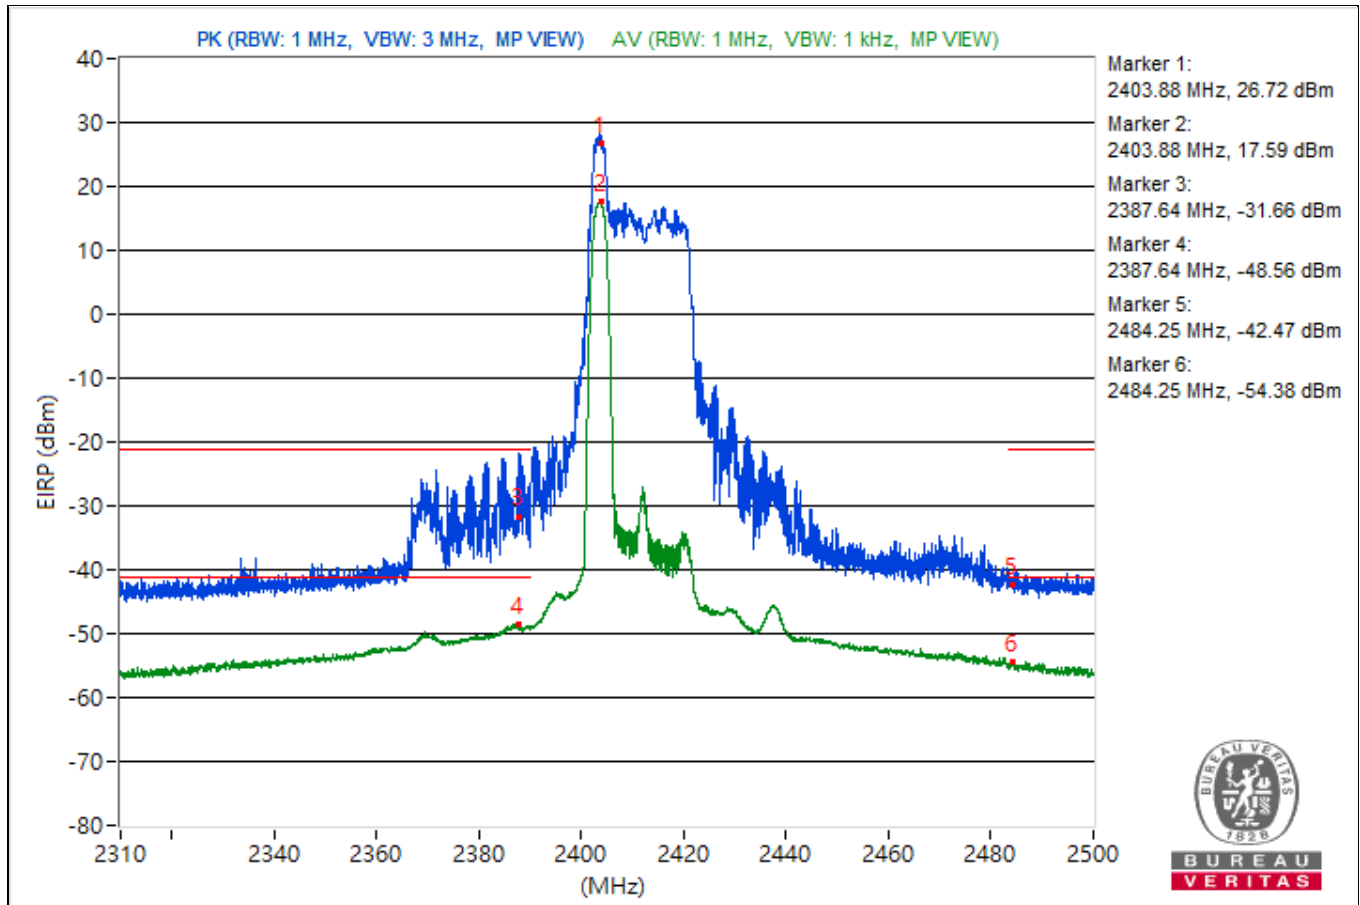


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2428.58	124.15 PK			25.71	3.18	28.89
2	*2428.58	115.85 AV			17.41	3.18	20.59
3	2389.82	59.12 PK	74	-14.88	-39.32	3.18	-36.14
4	2389.82	44.98 AV	54	-9.02	-53.46	3.18	-50.28
5	2484.32	58.57 PK	74	-15.43	-39.87	3.18	-36.69
6	2484.32	44.25 AV	54	-9.75	-54.19	3.18	-51.01

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

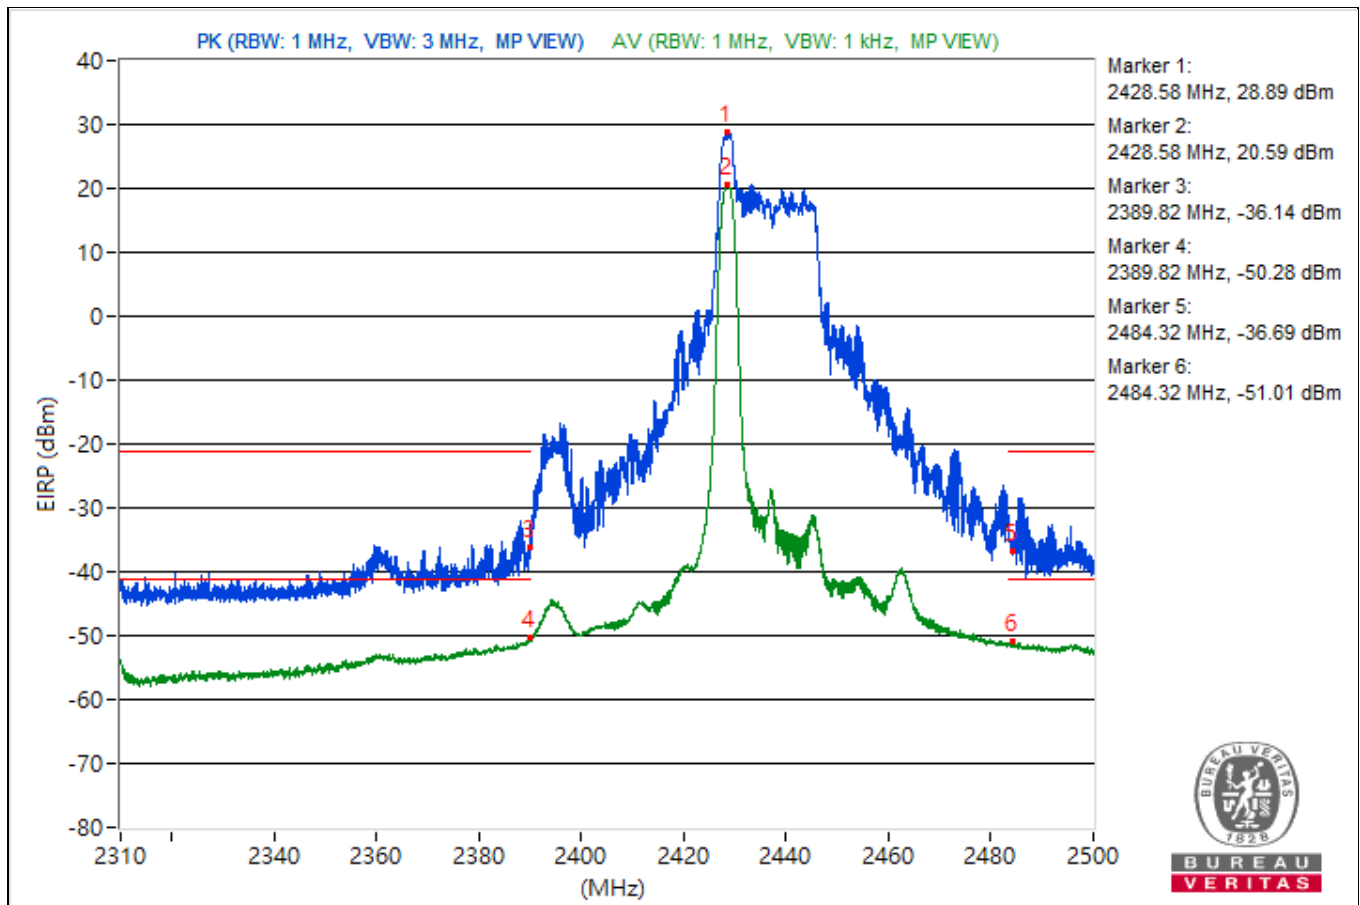

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.53	123.13 PK			24.69	3.18	27.87
2	*2470.53	113.01 AV			14.57	3.18	17.75
3	2350.45	55.07 PK	74	-18.93	-43.37	3.18	-40.19
4	2350.45	45.44 AV	54	-8.56	-53	3.18	-49.82
5	2487.41	63.82 PK	74	-10.18	-34.62	3.18	-31.44
6	2487.41	47.15 AV	54	-6.85	-51.29	3.18	-48.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

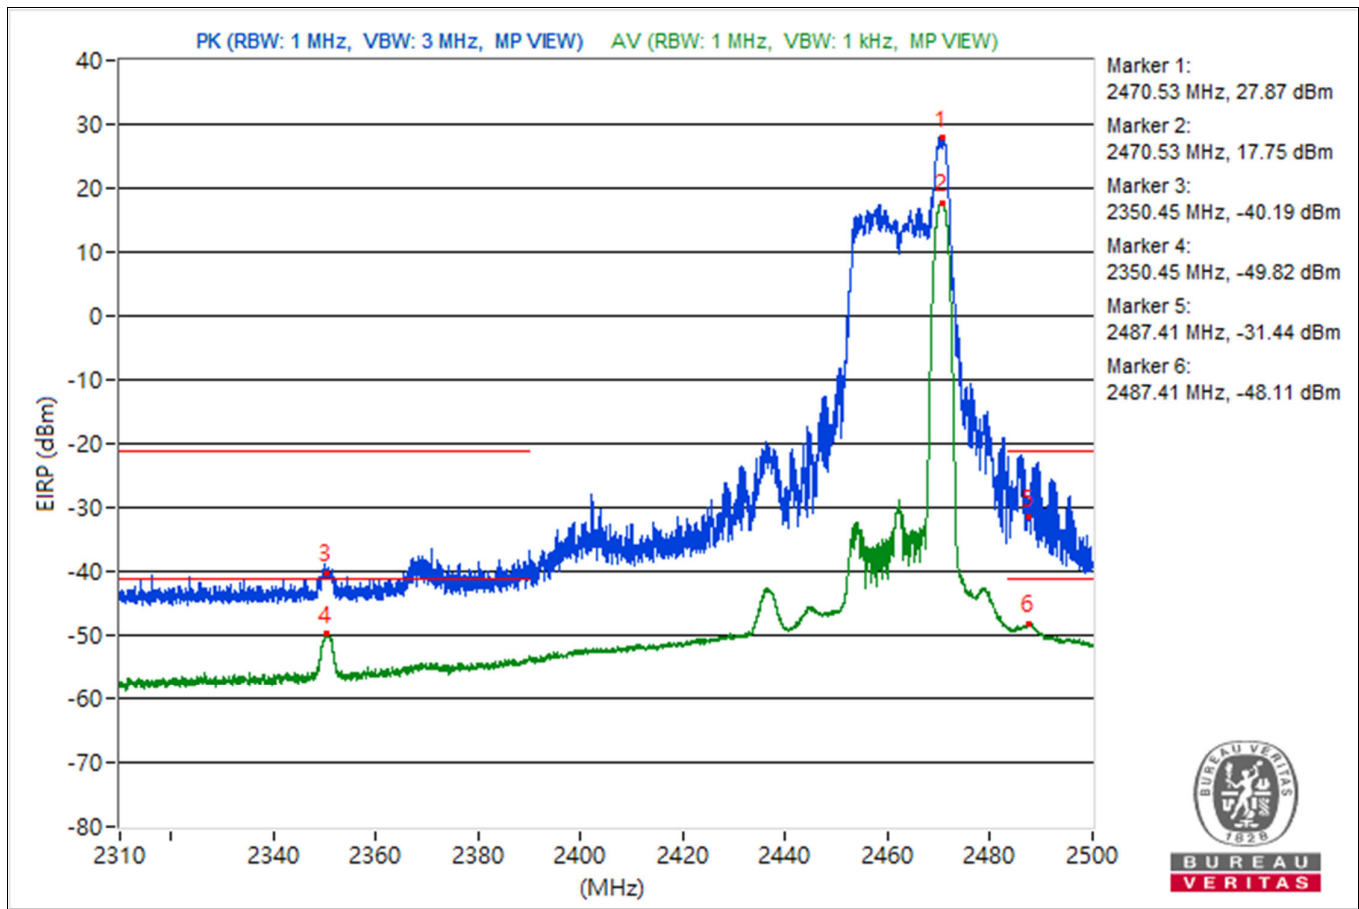


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.61	121.44 PK			23	3.18	26.18
2	*2475.61	112.53 AV			14.09	3.18	17.27
3	2355.55	55.22 PK	74	-18.78	-43.22	3.18	-40.04
4	2355.55	45.62 AV	54	-8.38	-52.82	3.18	-49.64
5	2483.78	69.99 PK	74	-4.01	-28.45	3.18	-25.27
6	2483.78	51.77 AV	54	-2.23	-46.67	3.18	-43.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

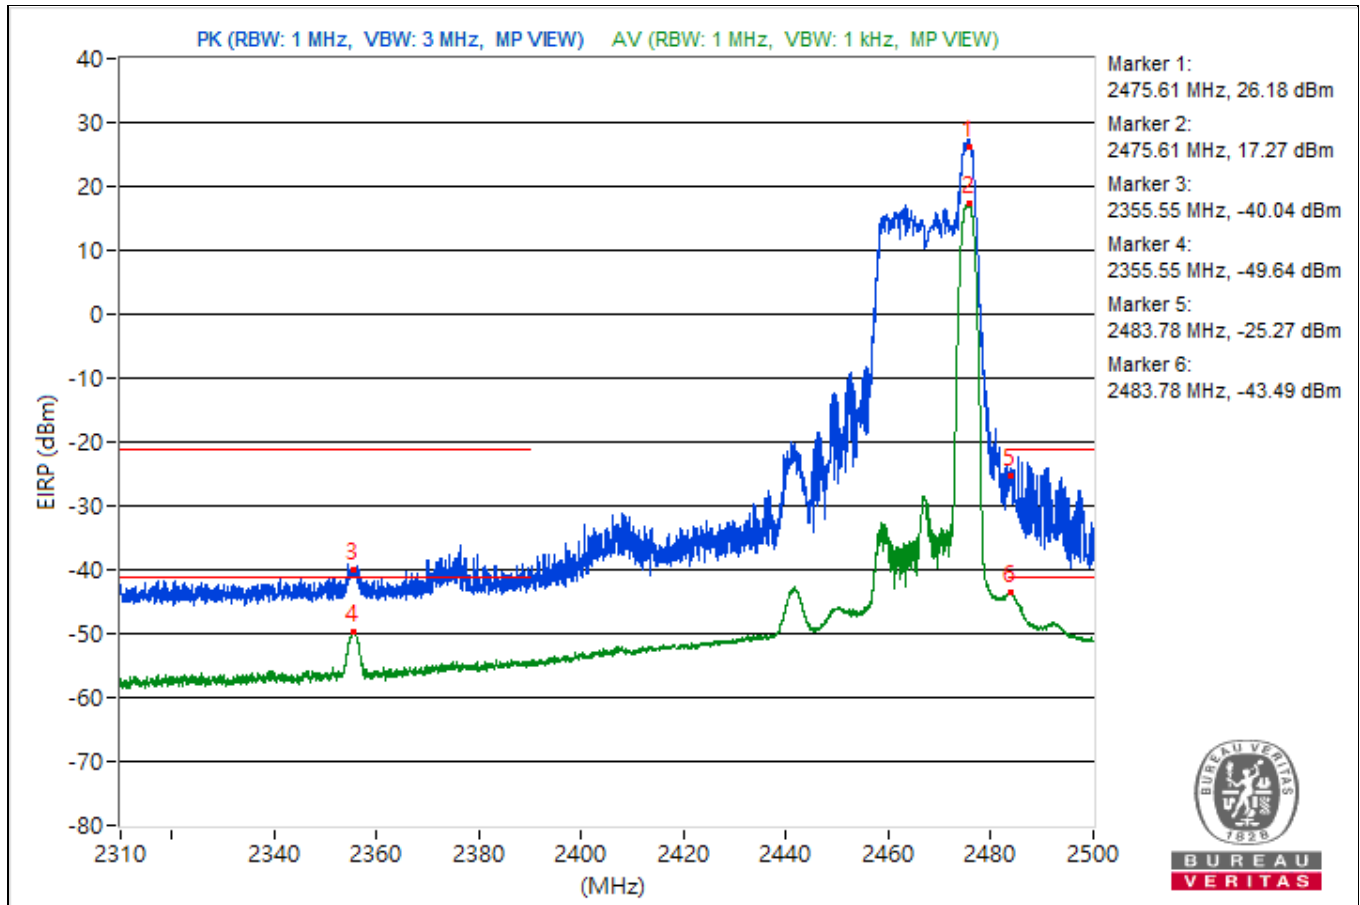


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2480.62	112.47 PK			14.03	3.18	17.21
2	*2480.62	103.16 AV			4.72	3.18	7.9
3	2360.09	57.87 PK	74	-16.13	-40.57	3.18	-37.39
4	2360.09	45.26 AV	54	-8.74	-53.18	3.18	-50
5	2483.52	73.59 PK	74	-0.41	-24.85	3.18	-21.67
6	2483.52	52.47 AV	54	-1.53	-45.97	3.18	-42.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

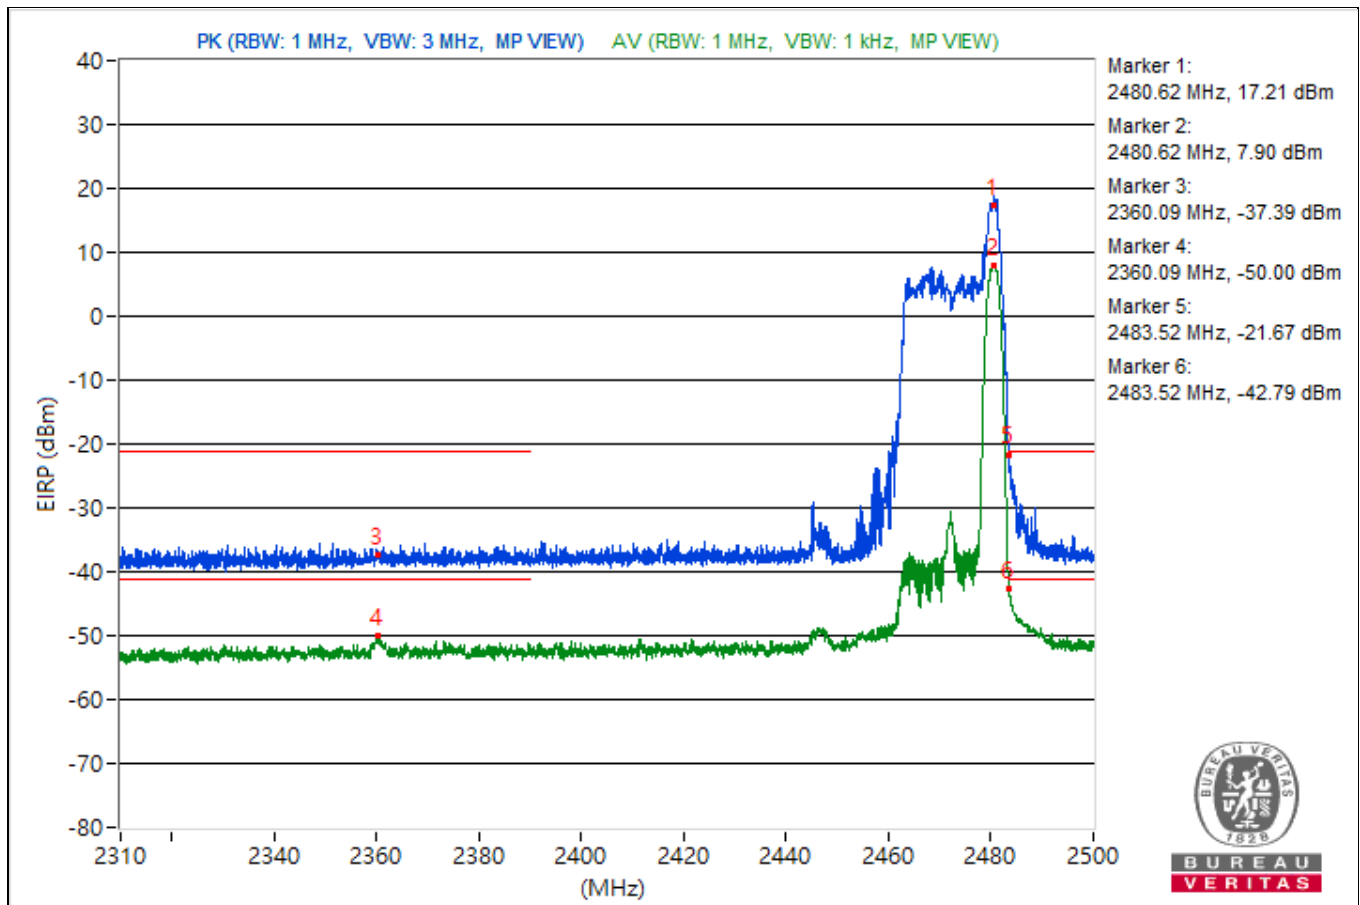


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2404.95	119.43 PK			20.99	3.18	24.17
2	*2404.95	109.91 AV			11.47	3.18	14.65
3	2389.63	62.09 PK	74	-11.91	-36.35	3.18	-33.17
4	2389.63	46.95 AV	54	-7.05	-51.49	3.18	-48.31
5	2490.83	53.73 PK	74	-20.27	-44.71	3.18	-41.53
6	2490.83	40.92 AV	54	-13.08	-57.52	3.18	-54.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

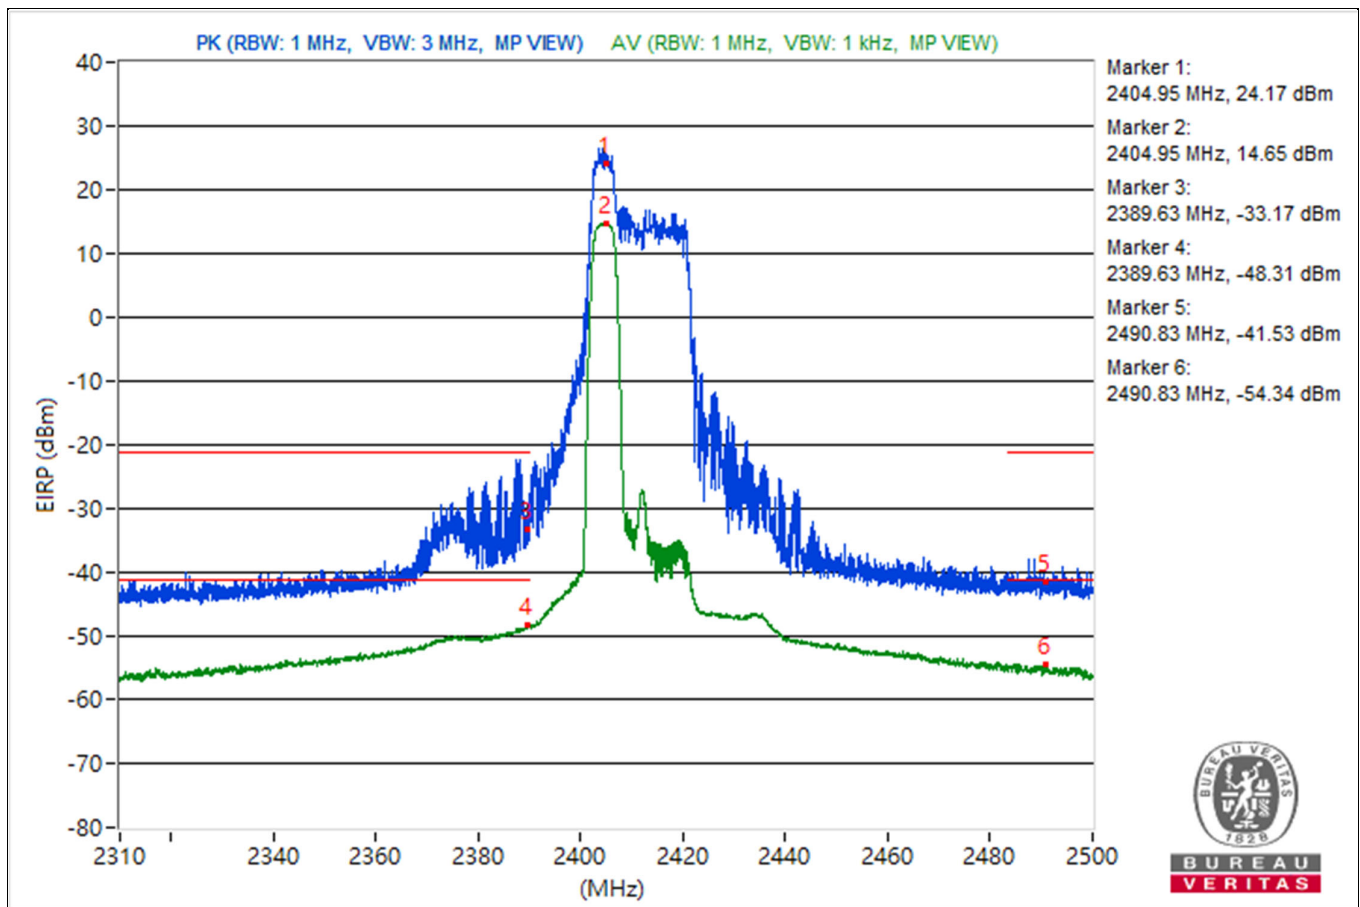


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2429.53	121.47 PK			23.03	3.18	26.21
2	*2429.53	113 AV			14.56	3.18	17.74
3	2389.82	56.24 PK	74	-17.76	-42.2	3.18	-39.02
4	2389.82	44.6 AV	54	-9.4	-53.84	3.18	-50.66
5	2486.56	57.05 PK	74	-16.95	-41.39	3.18	-38.21
6	2486.56	44.76 AV	54	-9.24	-53.68	3.18	-50.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

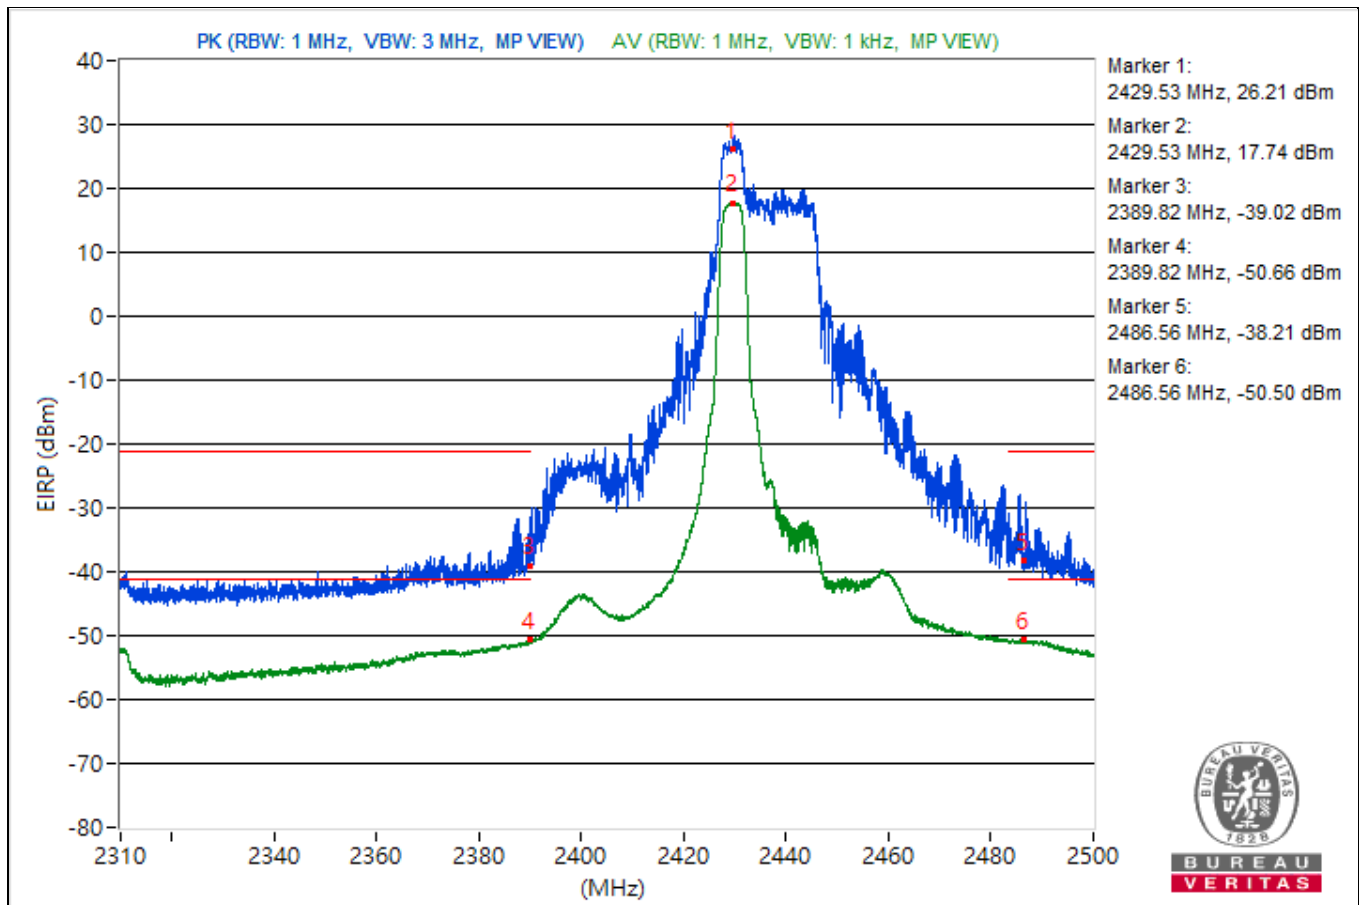


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2469.79	120.54 PK			22.1	3.18	25.28
2	*2469.79	110.14 AV			11.7	3.18	14.88
3	2349.8	53.68 PK	74	-20.32	-44.76	3.18	-41.58
4	2349.8	43.88 AV	54	-10.12	-54.56	3.18	-51.38
5	2484.04	71.91 PK	74	-2.09	-26.53	3.18	-23.35
6	2484.04	47.71 AV	54	-6.29	-50.73	3.18	-47.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

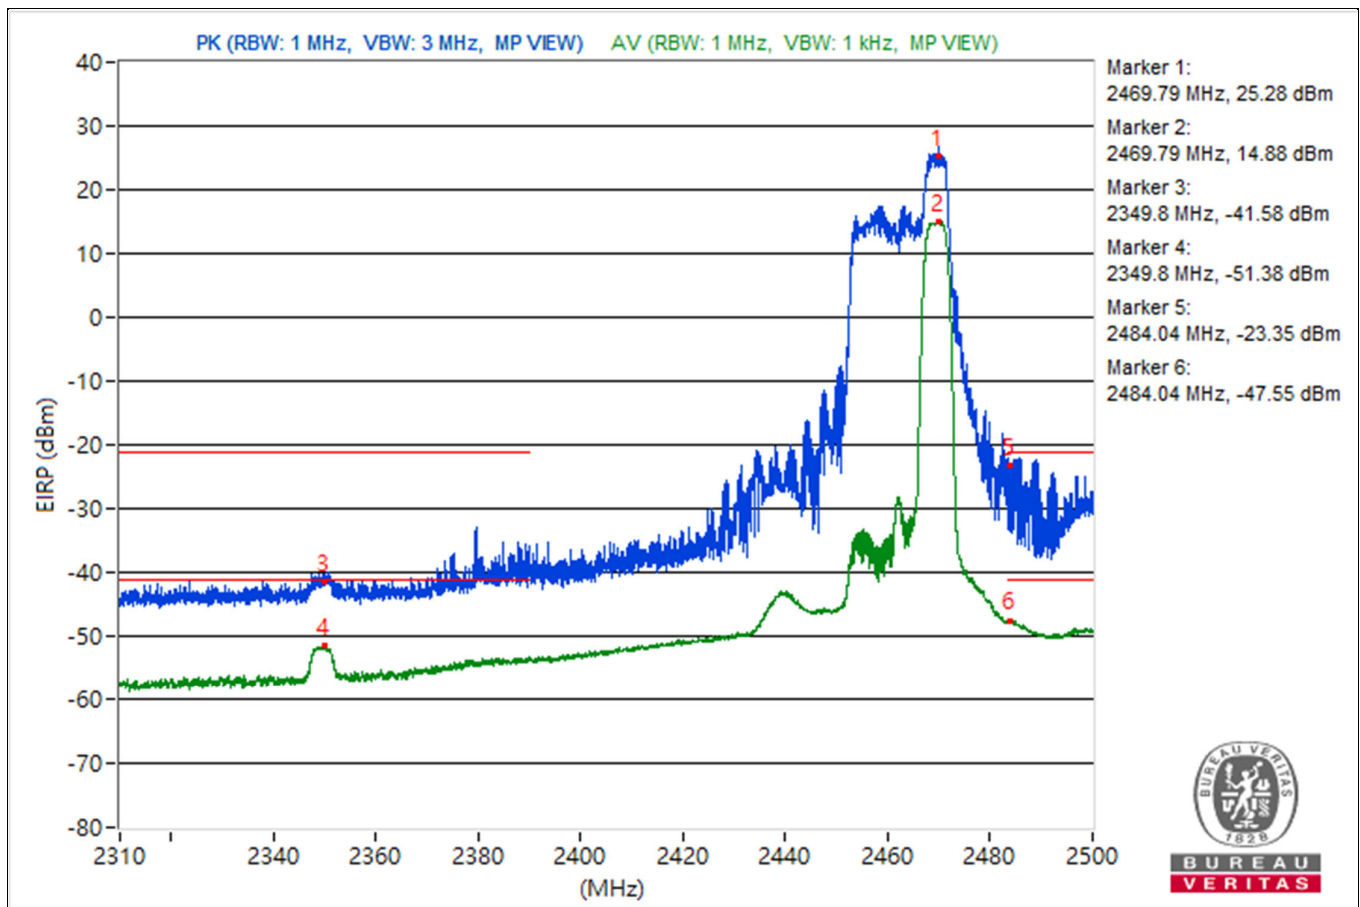


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.06	121.26 PK			22.82	3.18	26
2	*2475.06	109.82 AV			11.38	3.18	14.56
3	2354.27	54.07 PK	74	-19.93	-44.37	3.18	-41.19
4	2354.27	43.68 AV	54	-10.32	-54.76	3.18	-51.58
5	2483.97	71.09 PK	74	-2.91	-27.35	3.18	-24.17
6	2483.97	50.44 AV	54	-3.56	-48	3.18	-44.82

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

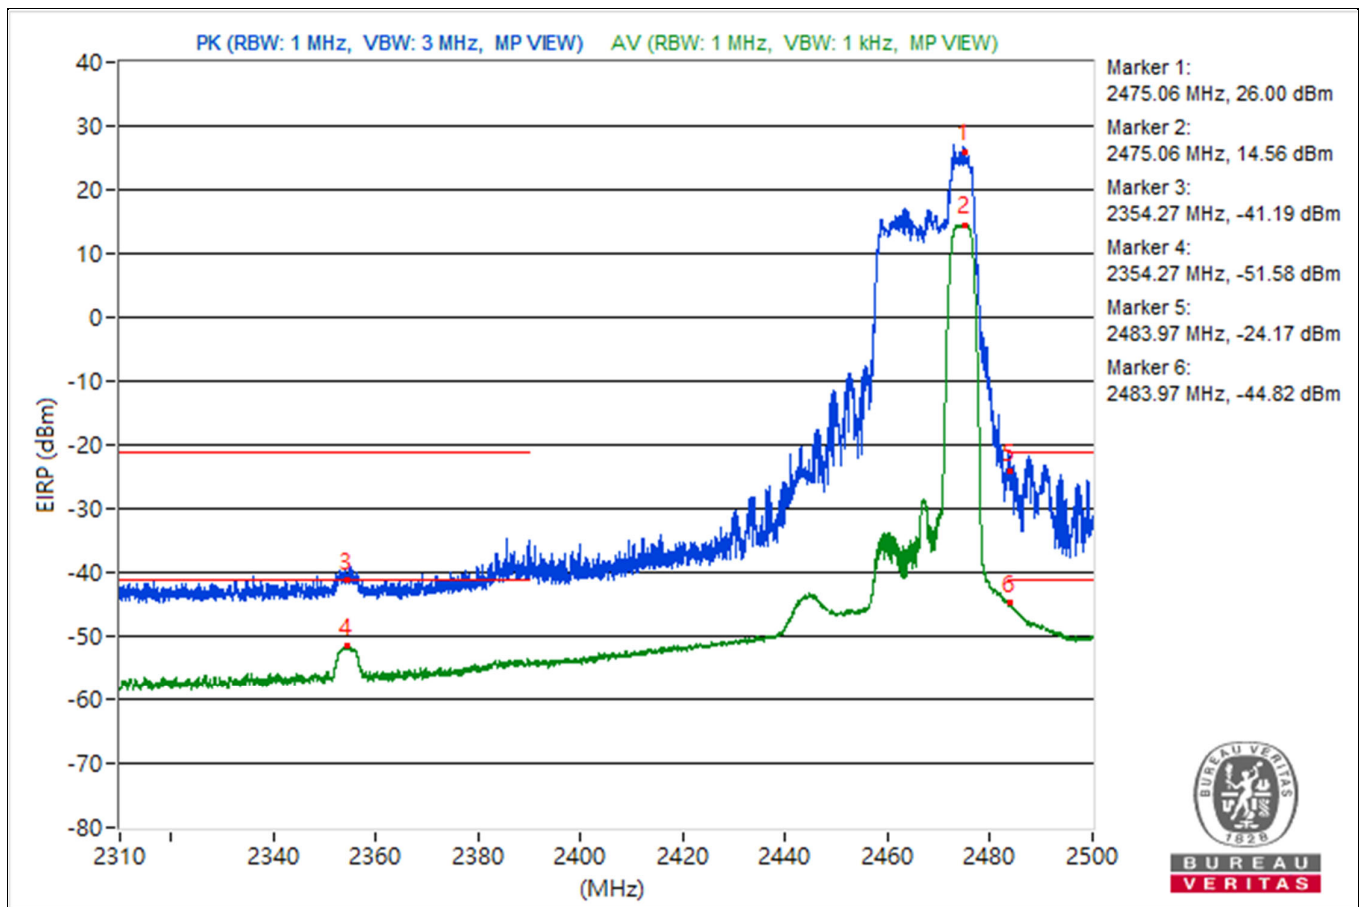


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2479.84	113.72 PK			15.28	3.18	18.46
2	*2479.84	102.6 AV			4.16	3.18	7.34
3	2360.02	57.71 PK	74	-16.29	-40.73	3.18	-37.55
4	2360.02	44.47 AV	54	-9.53	-53.97	3.18	-50.79
5	2483.52	73.48 PK	74	-0.52	-24.96	3.18	-21.78
6	2483.52	51.06 AV	54	-2.94	-47.38	3.18	-44.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

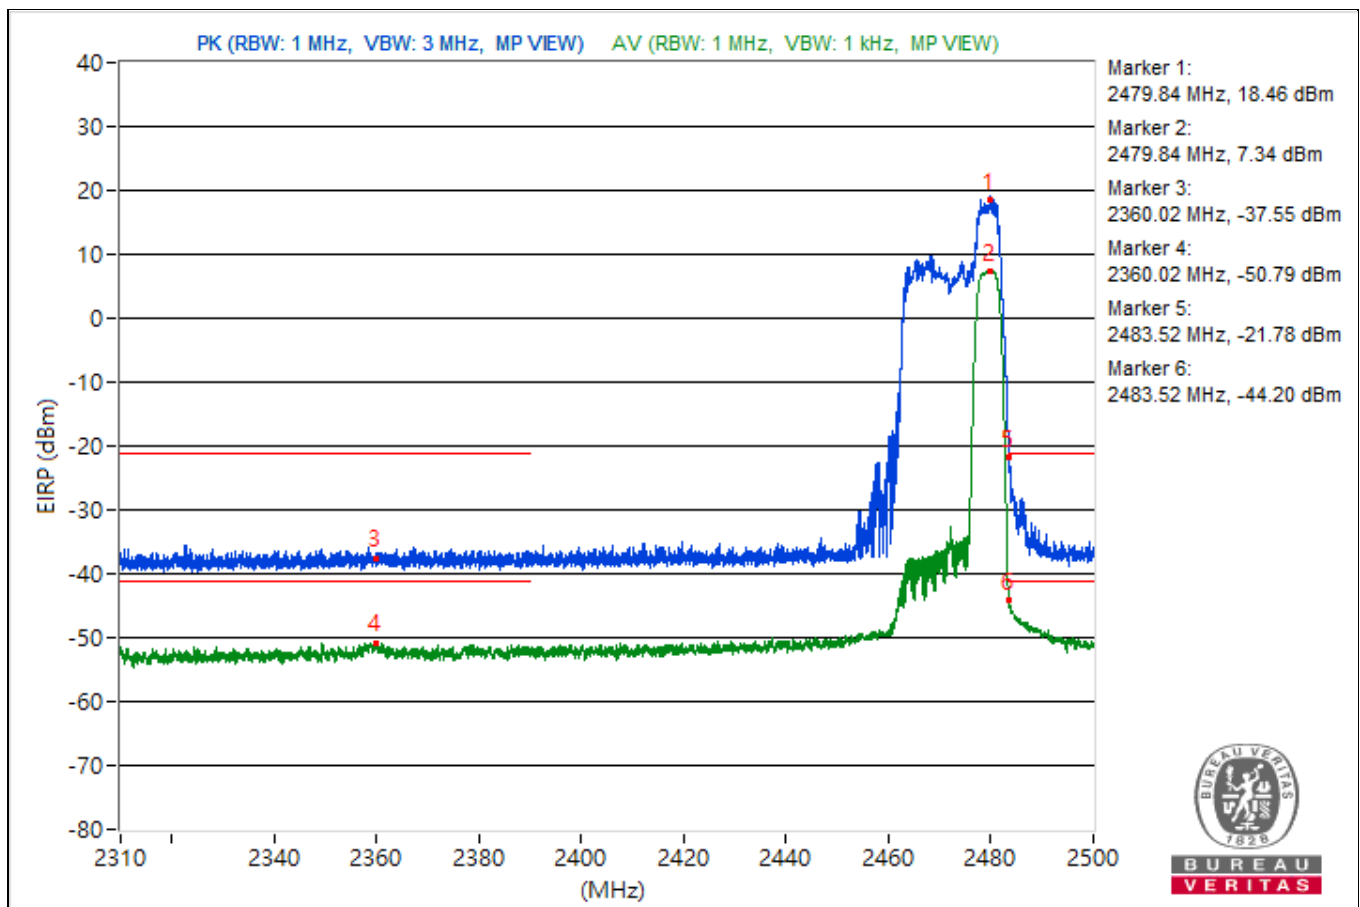


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2403.86	116.72 PK			18.28	3.18	21.46
2	*2403.86	107 AV			8.56	3.18	11.74
3	2389.66	72.21 PK	74	-1.79	-26.23	3.18	-23.05
4	2389.66	48.3 AV	54	-5.7	-50.14	3.18	-46.96
5	2484.02	53.15 PK	74	-20.85	-45.29	3.18	-42.11
6	2484.02	41.03 AV	54	-12.97	-57.41	3.18	-54.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

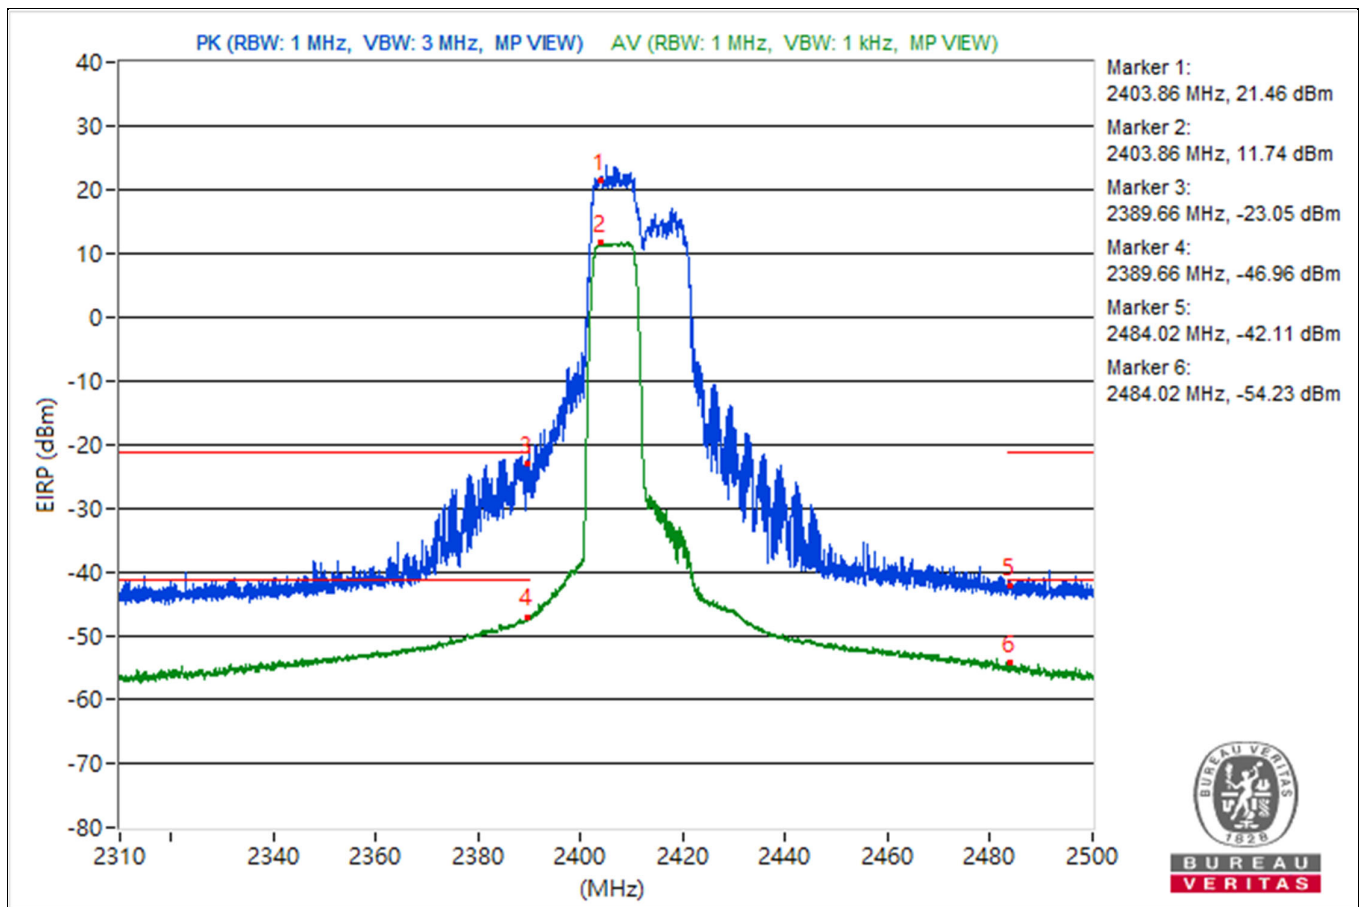


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2434.07	118.89 PK			20.45	3.18	23.63
2	*2434.07	109.83 AV			11.39	3.18	14.57
3	2389.94	62.52 PK	74	-11.48	-35.92	3.18	-32.74
4	2389.94	45.95 AV	54	-8.05	-52.49	3.18	-49.31
5	2483.52	65.26 PK	74	-8.74	-33.18	3.18	-30
6	2483.52	46.12 AV	54	-7.88	-52.32	3.18	-49.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

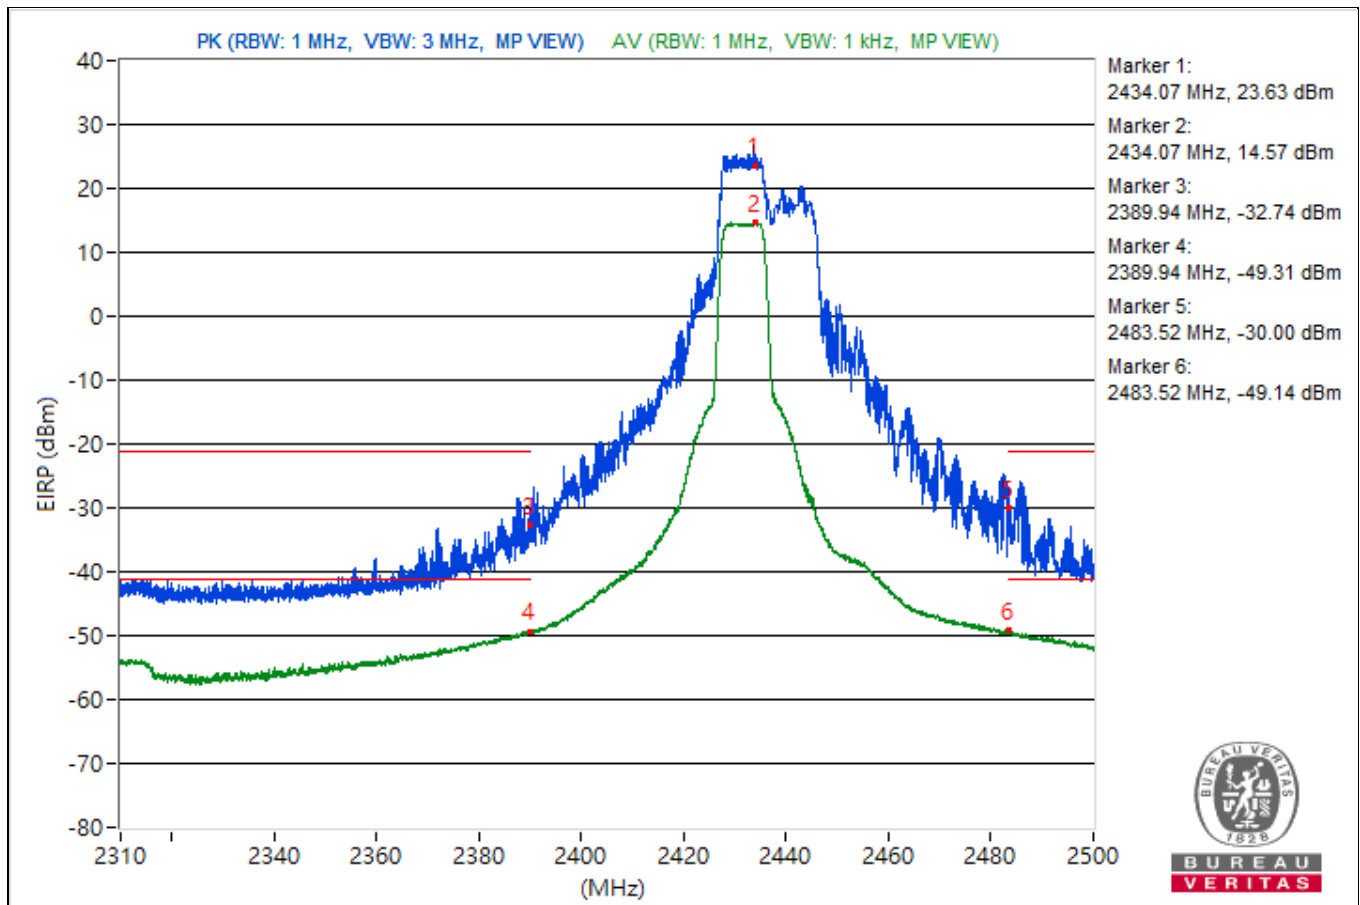


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.27	117.43 PK			18.99	3.18	22.17
2	*2468.27	107.34 AV			8.9	3.18	12.08
3	2347.12	54.2 PK	74	-19.8	-44.24	3.18	-41.06
4	2347.12	42.4 AV	54	-11.6	-56.04	3.18	-52.86
5	2483.59	72.22 PK	74	-1.78	-26.22	3.18	-23.04
6	2483.59	50.07 AV	54	-3.93	-48.37	3.18	-45.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

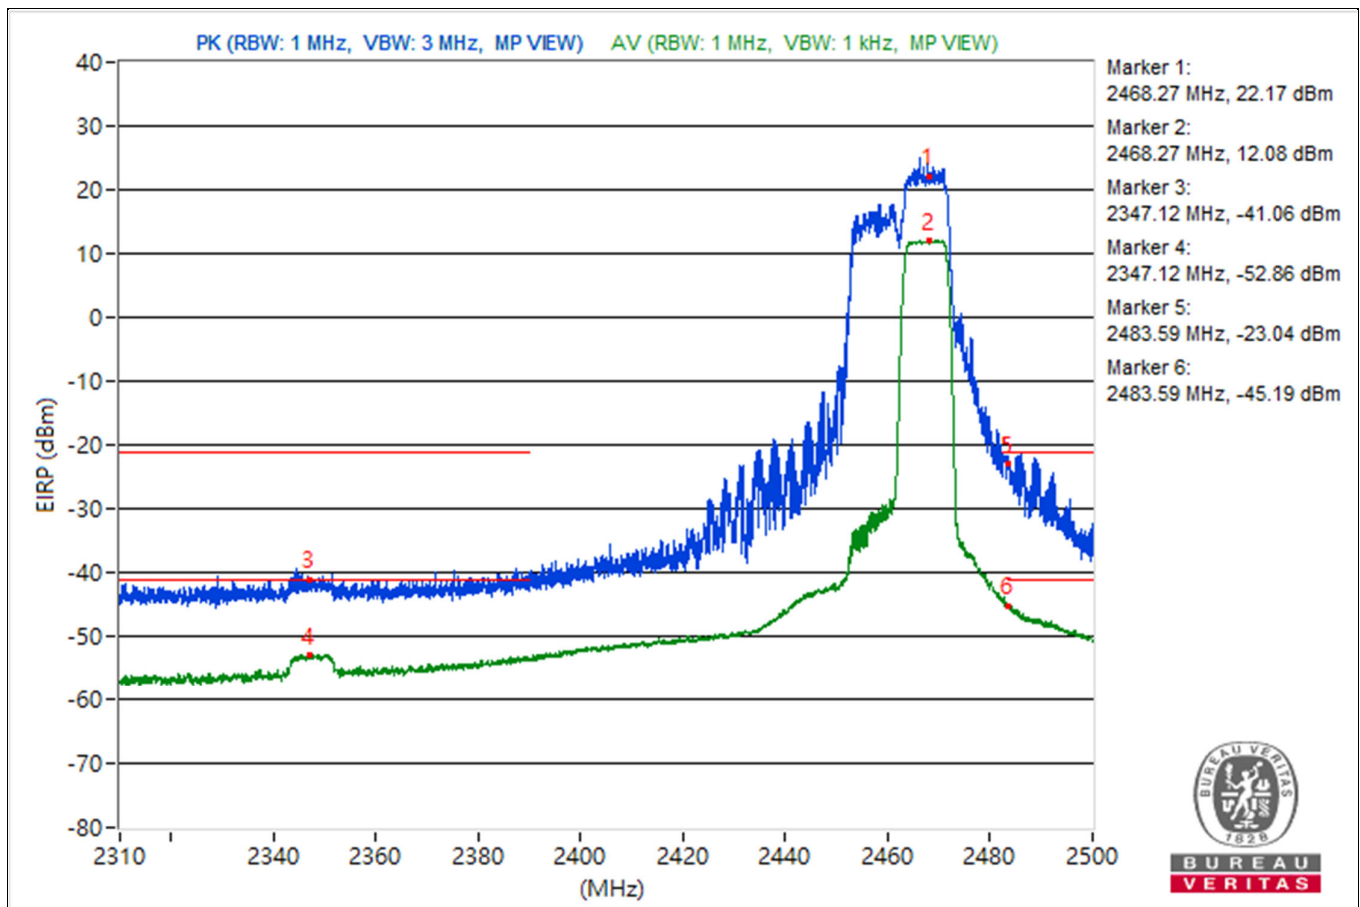


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.13	116.47 PK			18.03	3.18	21.21
2	*2475.13	106.84 AV			8.4	3.18	11.58
3	2353.44	52.78 PK	74	-21.22	-45.66	3.18	-42.48
4	2353.44	42.49 AV	54	-11.51	-55.95	3.18	-52.77
5	2483.61	71.42 PK	74	-2.58	-27.02	3.18	-23.84
6	2483.61	52.13 AV	54	-1.87	-46.31	3.18	-43.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

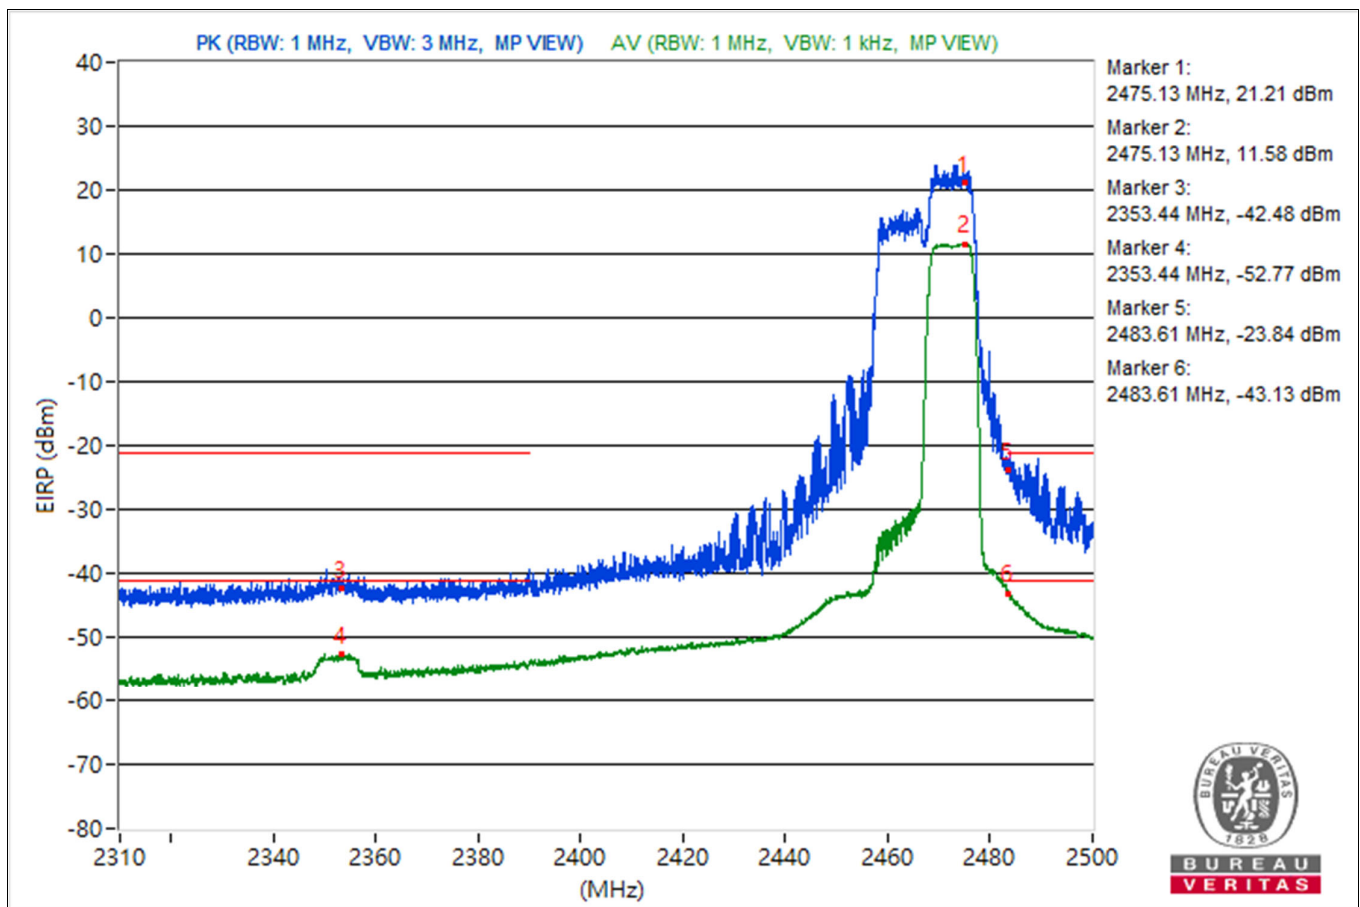


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2479.74	110.77 PK			12.33	3.18	15.51
2	*2479.74	101.93 AV			3.49	3.18	6.67
3	2387.05	56.3 PK	74	-17.7	-42.14	3.18	-38.96
4	2387.05	44.49 AV	54	-9.51	-53.95	3.18	-50.77
5	2483.52	73.61 PK	74	-0.39	-24.83	3.18	-21.65
6	2483.52	53.03 AV	54	-0.97	-45.41	3.18	-42.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

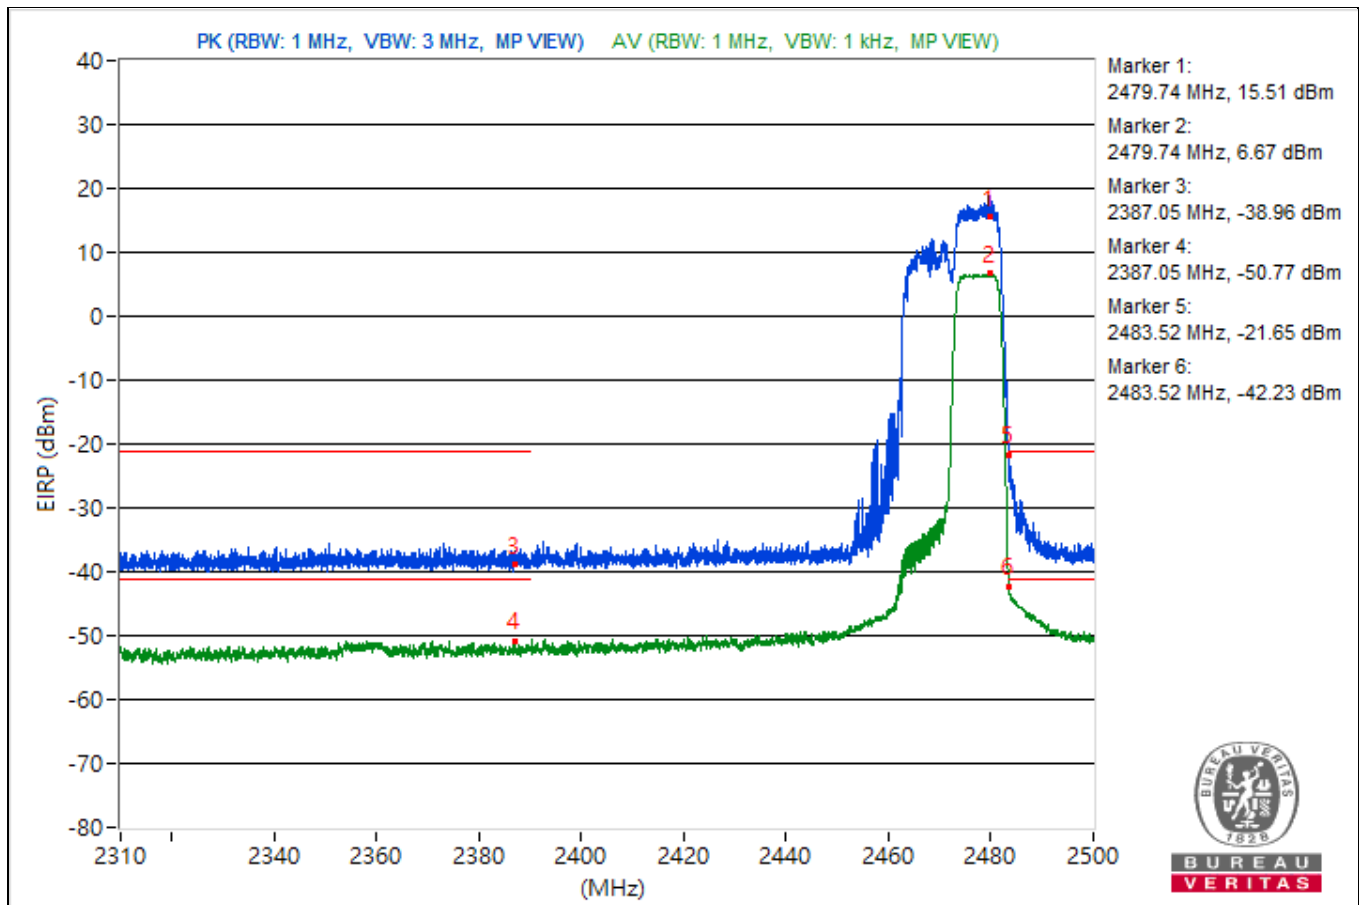


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2408.37	118.76 PK			20.32	3.18	23.5
2	*2408.37	108.55 AV			10.11	3.18	13.29
3	2389.63	64.21 PK	74	-9.79	-34.23	3.18	-31.05
4	2389.63	46.98 AV	54	-7.02	-51.46	3.18	-48.28
5	2490.93	52.06 PK	74	-21.94	-46.38	3.18	-43.2
6	2490.93	40.9 AV	54	-13.1	-57.54	3.18	-54.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

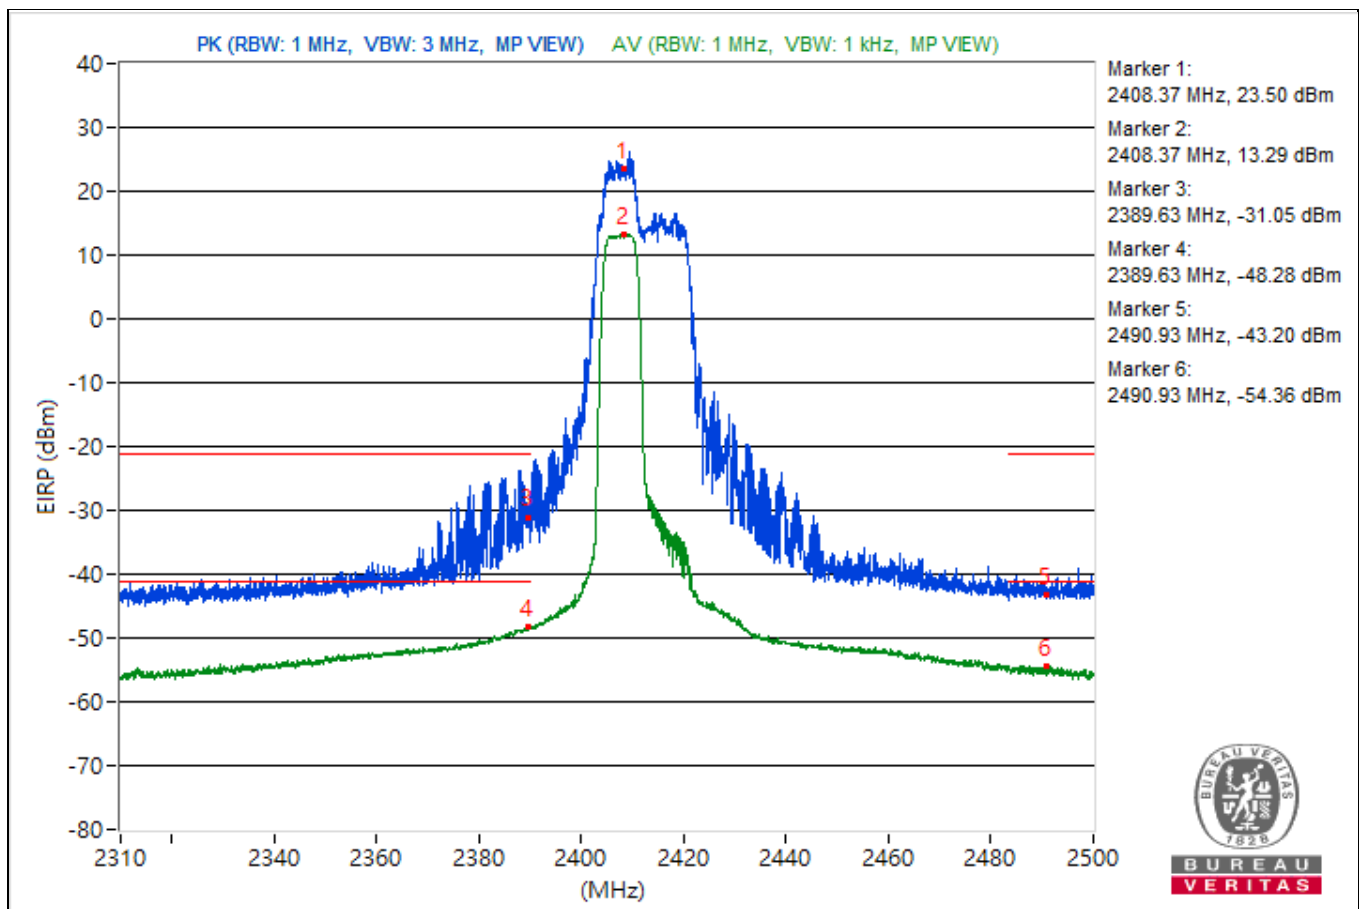

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2433.76	120.33 PK			21.89	3.18	25.07
2	*2433.76	111.63 AV			13.19	3.18	16.37
3	2389.32	64.94 PK	74	-9.06	-33.5	3.18	-30.32
4	2389.32	47.85 AV	54	-6.15	-50.59	3.18	-47.41
5	2484.21	61.86 PK	74	-12.14	-36.58	3.18	-33.4
6	2484.21	47.71 AV	54	-6.29	-50.73	3.18	-47.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

