


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2465.54	119.29 PK			20.85	3.18	24.03
2	*2465.54	108.73 AV			10.29	3.18	13.47
3	2345.6	54.42 PK	74	-19.58	-44.02	3.18	-40.84
4	2345.6	42.94 AV	54	-11.06	-55.5	3.18	-52.32
5	2483.57	68.7 PK	74	-5.3	-29.74	3.18	-26.56
6	2483.57	48.57 AV	54	-5.43	-49.87	3.18	-46.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

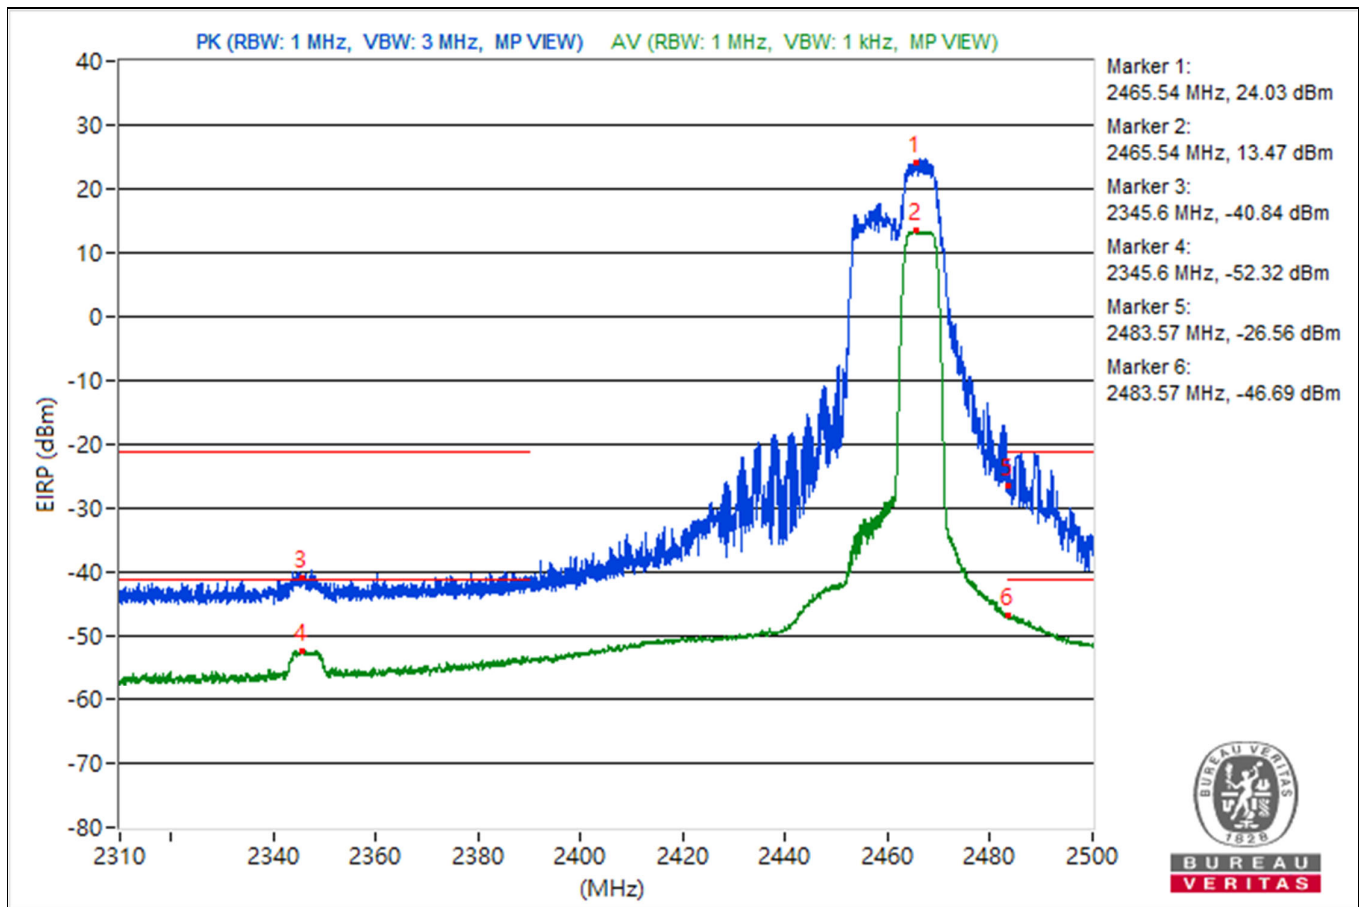


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2471.24	118.88 PK			20.44	3.18	23.62
2	*2471.24	108.13 AV			9.69	3.18	12.87
3	2350.61	54.41 PK	74	-19.59	-44.03	3.18	-40.85
4	2350.61	42.95 AV	54	-11.05	-55.49	3.18	-52.31
5	2483.87	71.18 PK	74	-2.82	-27.26	3.18	-24.08
6	2483.87	48.6 AV	54	-5.4	-49.84	3.18	-46.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

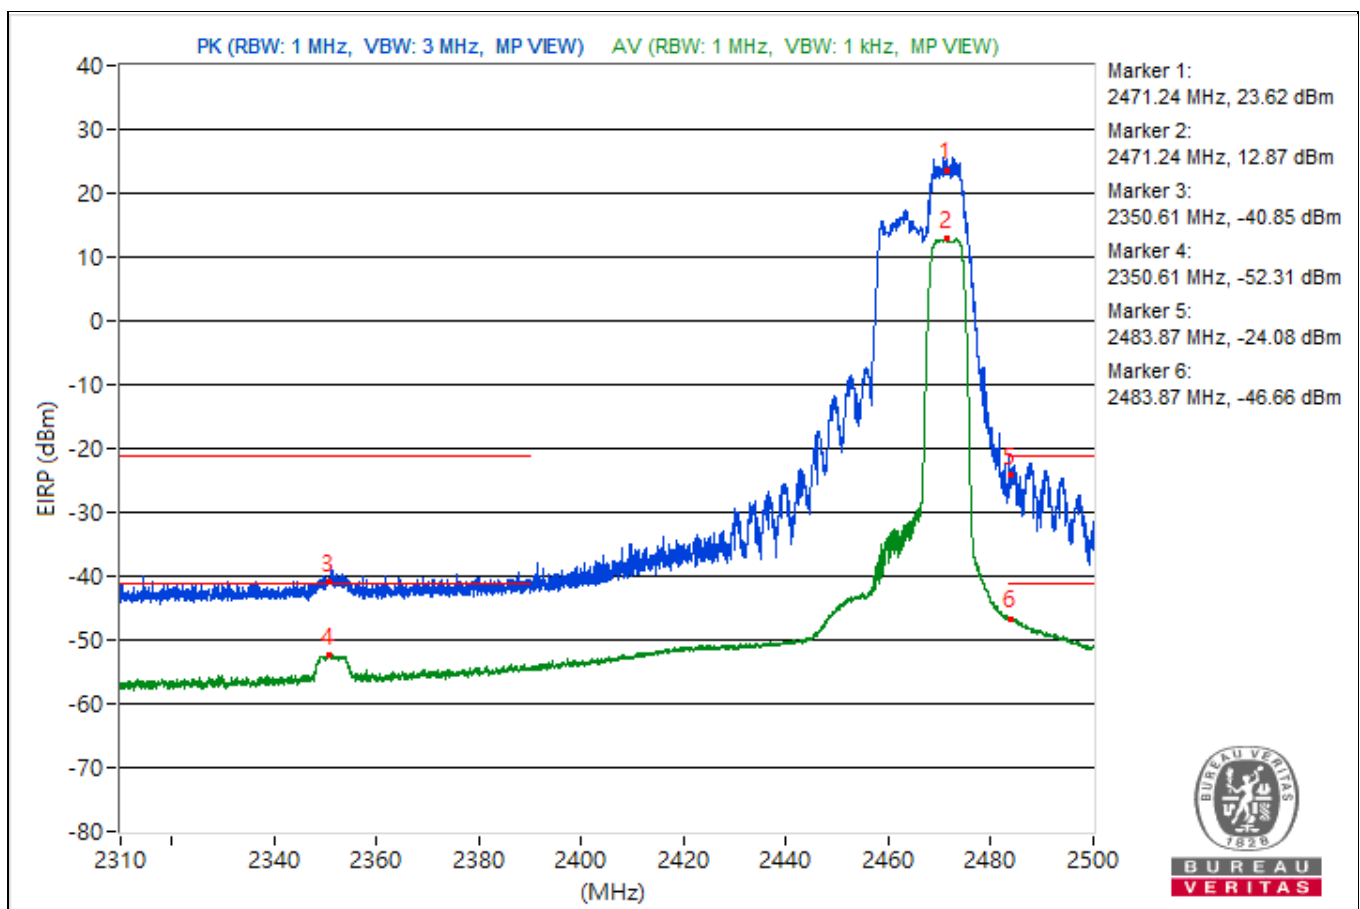


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.66	116.59 PK			18.15	3.18	21.33
2	*2475.66	106.73 AV			8.29	3.18	11.47
3	2356.91	53.78 PK	74	-20.22	-44.66	3.18	-41.48
4	2356.91	42.74 AV	54	-11.26	-55.7	3.18	-52.52
5	2483.52	71.27 PK	74	-2.73	-27.17	3.18	-23.99
6	2483.52	51.36 AV	54	-2.64	-47.08	3.18	-43.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

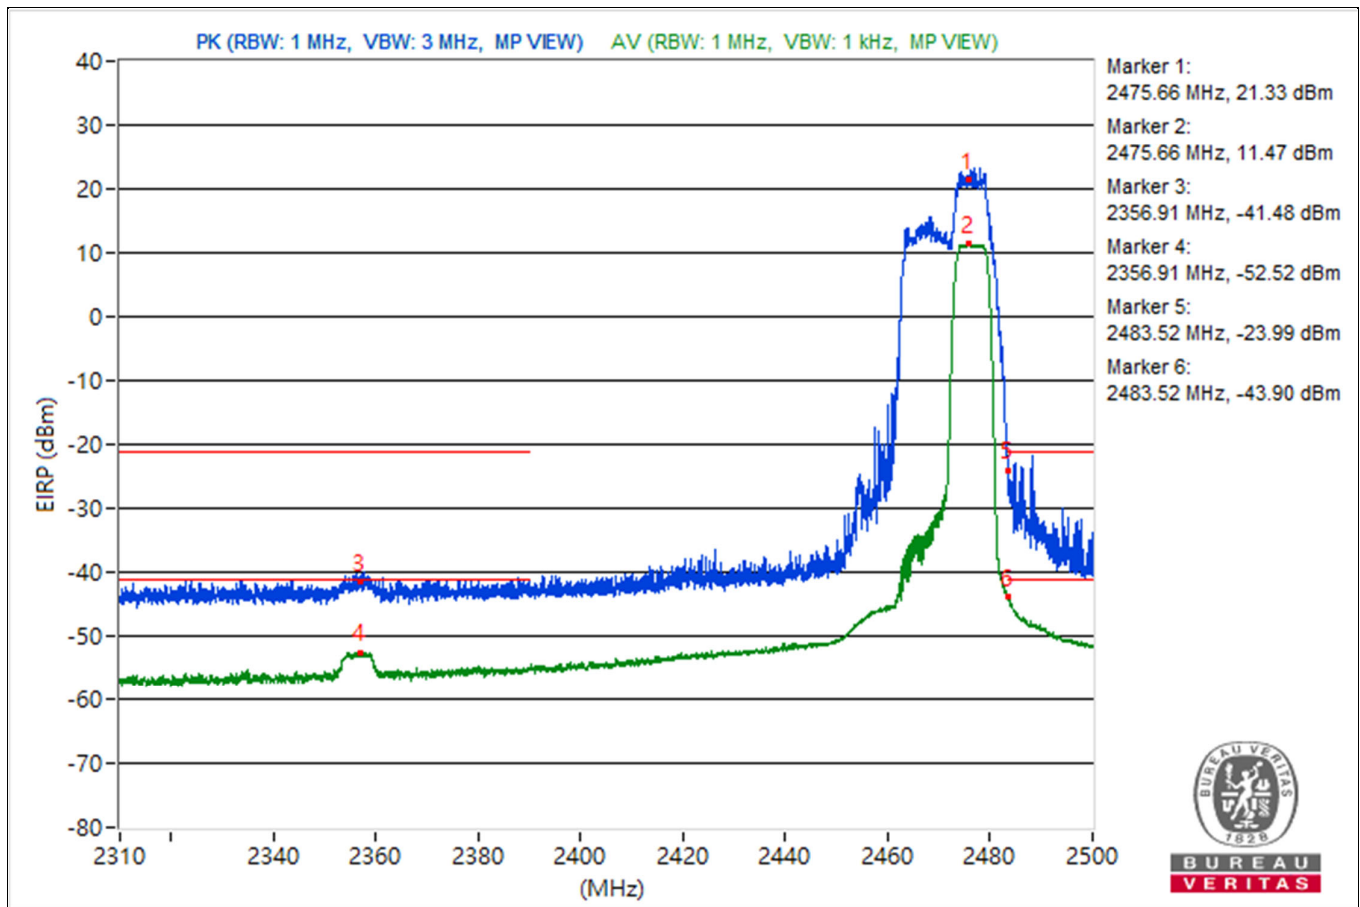


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.01	116.26 PK			17.82	3.18	21
2	*2410.01	106.85 AV			8.41	3.18	11.59
3	2389.8	72.21 PK	74	-1.79	-26.23	3.18	-23.05
4	2389.8	49.87 AV	54	-4.13	-48.57	3.18	-45.39
5	2485.16	52.57 PK	74	-21.43	-45.87	3.18	-42.69
6	2485.16	41.46 AV	54	-12.54	-56.98	3.18	-53.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

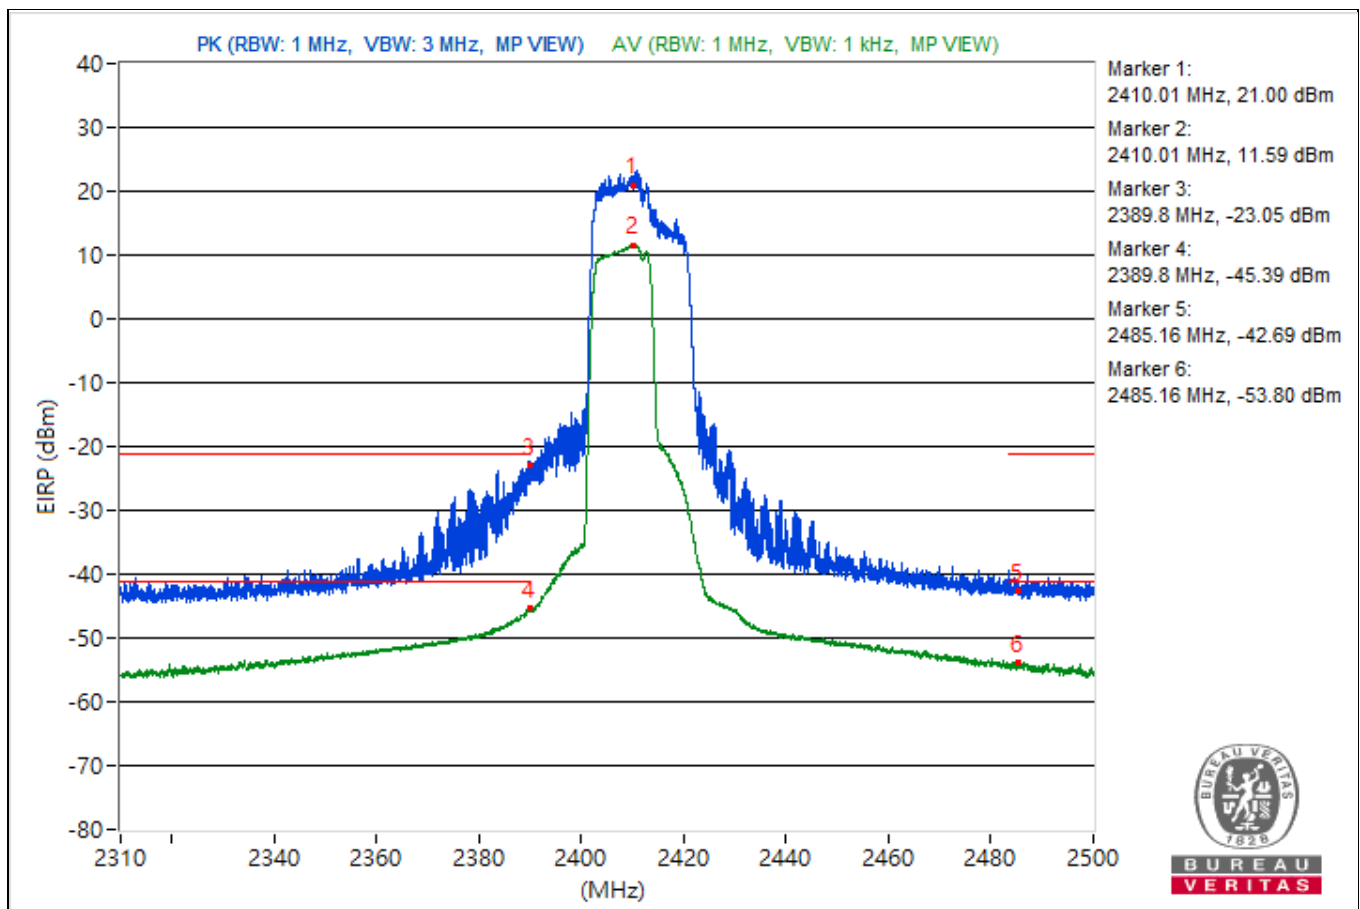


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2435.97	118.95 PK			20.51	3.18	23.69
2	*2435.97	109.96 AV			11.52	3.18	14.7
3	2389.3	58.32 PK	74	-15.68	-40.12	3.18	-36.94
4	2389.3	46.24 AV	54	-7.76	-52.2	3.18	-49.02
5	2483.78	56.43 PK	74	-17.57	-42.01	3.18	-38.83
6	2483.78	46.17 AV	54	-7.83	-52.27	3.18	-49.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

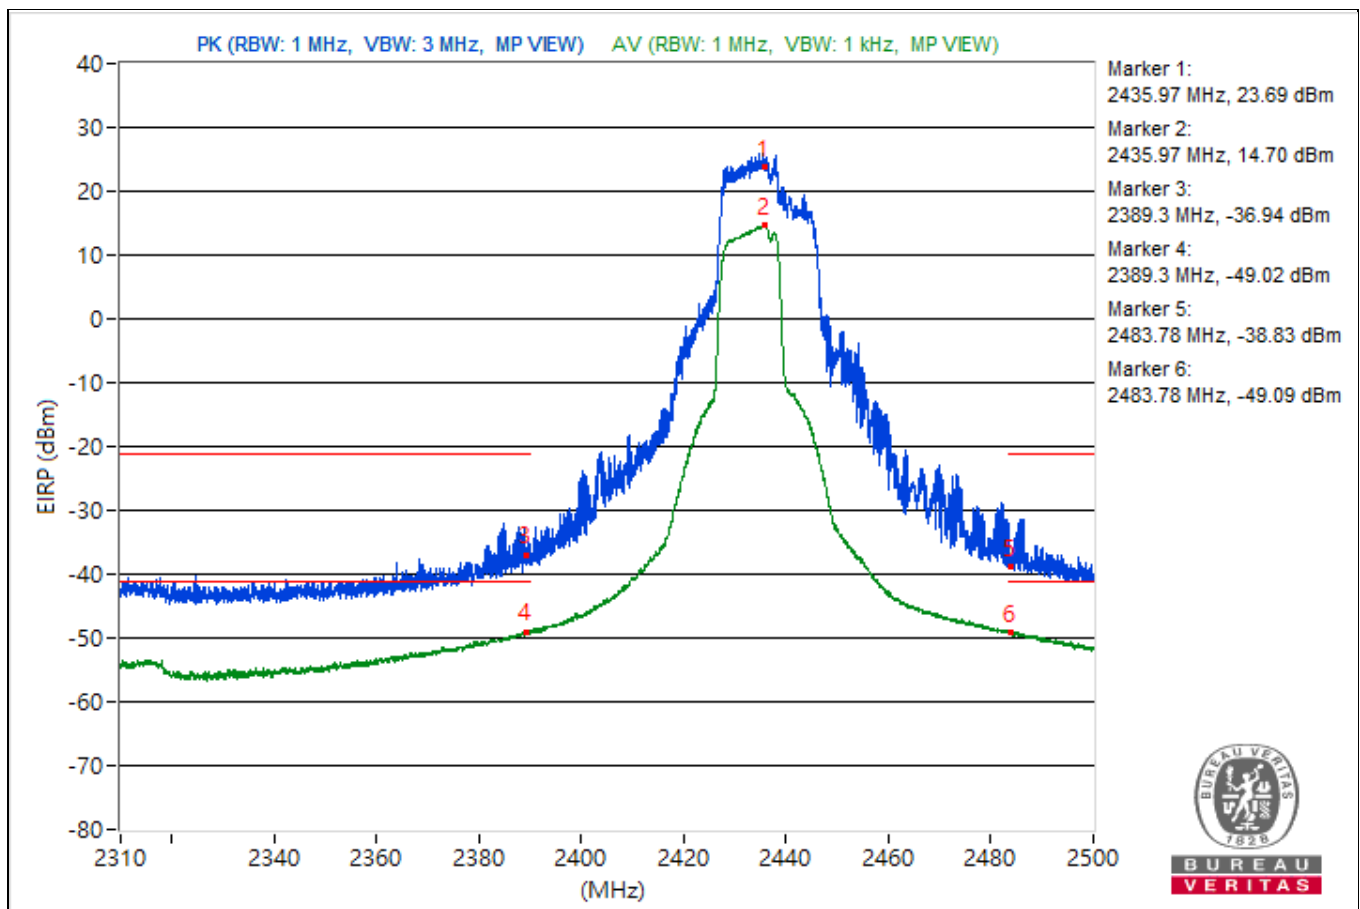


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2463.21	116.78 PK			18.34	3.18	21.52
2	*2463.21	107.44 AV			9	3.18	12.18
3	2347.14	53.59 PK	74	-20.41	-44.85	3.18	-41.67
4	2347.14	42.31 AV	54	-11.69	-56.13	3.18	-52.95
5	2483.68	69.47 PK	74	-4.53	-28.97	3.18	-25.79
6	2483.68	49.4 AV	54	-4.6	-49.04	3.18	-45.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

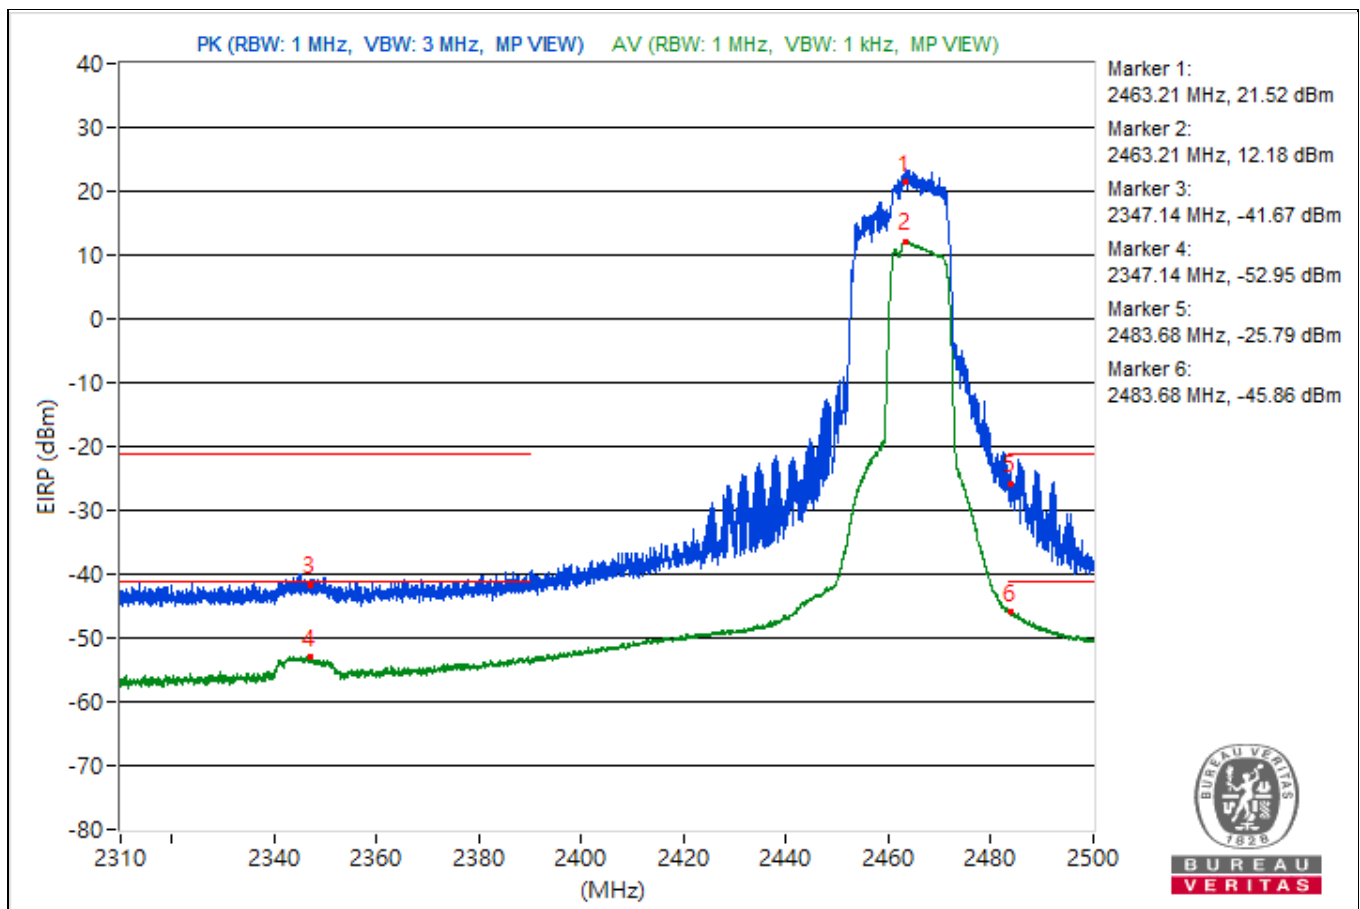


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.34	116.66 PK			18.22	3.18	21.4
2	*2468.34	106.36 AV			7.92	3.18	11.1
3	2348.12	52.38 PK	74	-21.62	-46.06	3.18	-42.88
4	2348.12	42.46 AV	54	-11.54	-55.98	3.18	-52.8
5	2483.52	69.15 PK	74	-4.85	-29.29	3.18	-26.11
6	2483.52	52.3 AV	54	-1.7	-46.14	3.18	-42.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

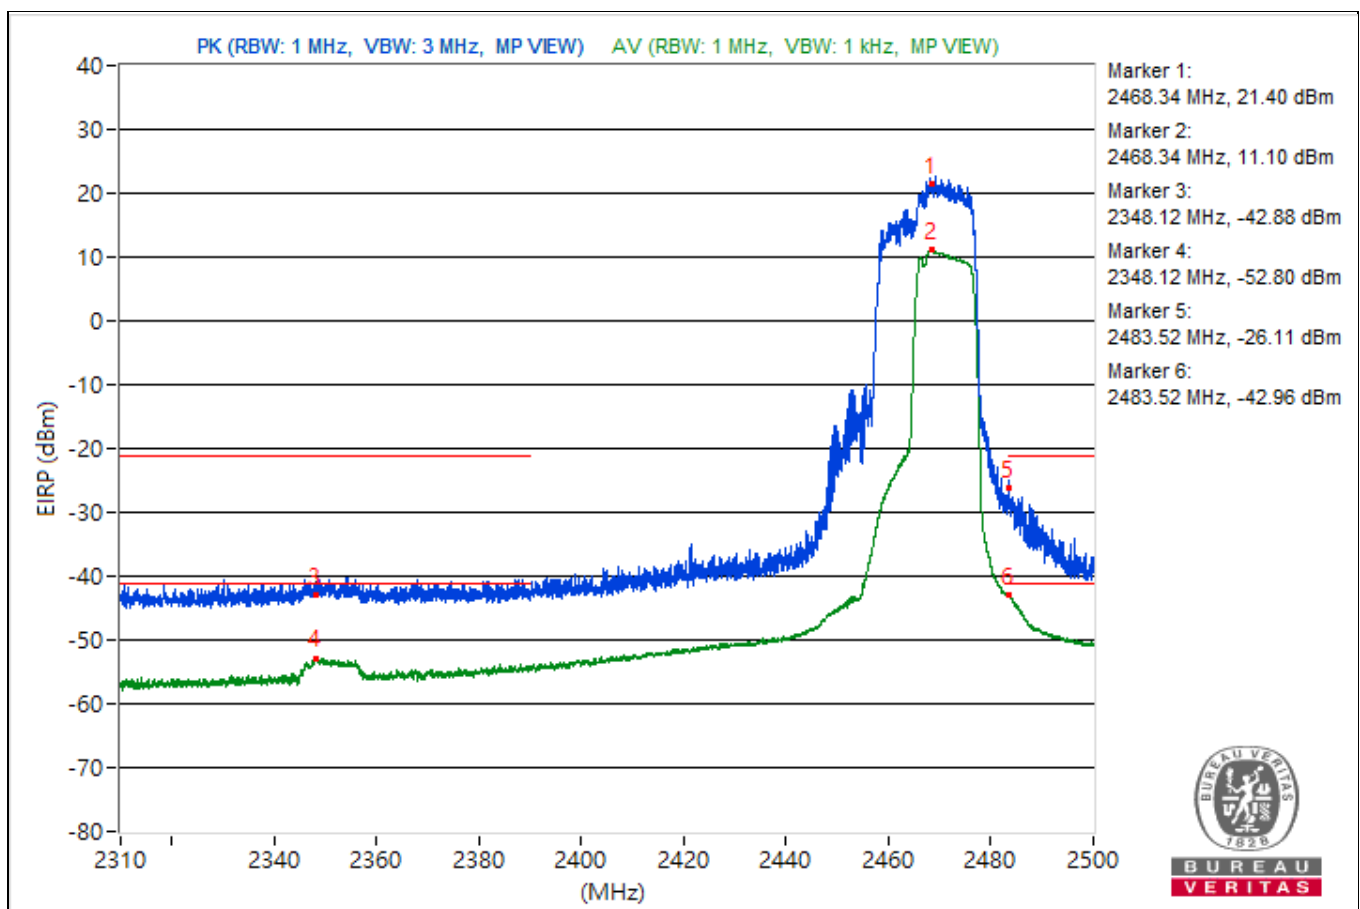


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.23	116.11 PK			17.67	3.18	20.85
2	*2473.23	104.71 AV			6.27	3.18	9.45
3	2354.2	57.61 PK	74	-16.39	-40.83	3.18	-37.65
4	2354.2	45.1 AV	54	-8.9	-53.34	3.18	-50.16
5	2483.52	65.2 PK	74	-8.8	-33.24	3.18	-30.06
6	2483.52	53.93 AV	54	-0.07	-44.51	3.18	-41.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

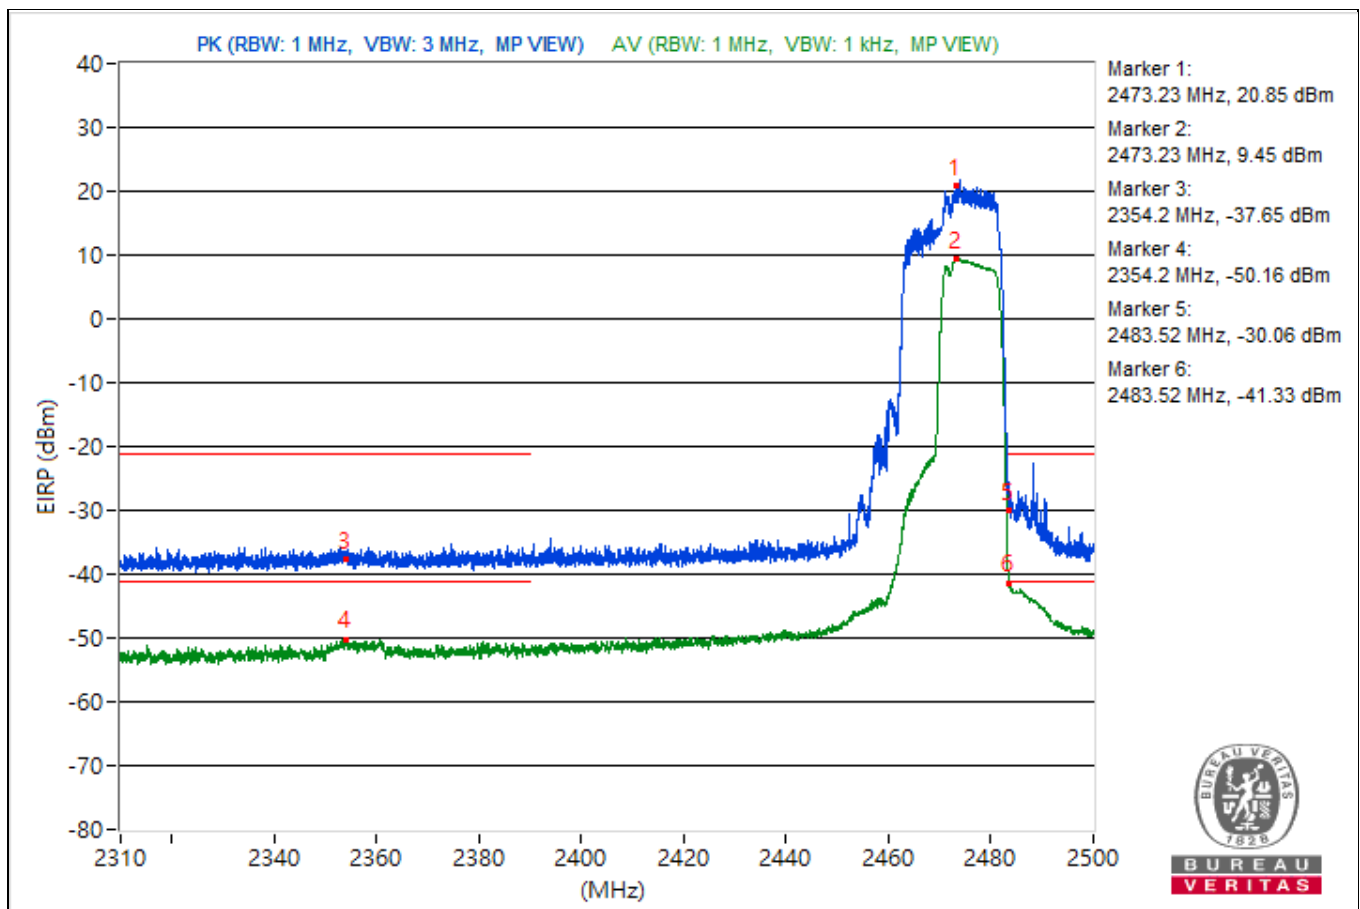

Mode A


2Tx

Conducted Unwanted Emissions

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2290.33	58.61 PK	74	-15.39	-48.24	-47.03	7.93	-36.65
2	2290.33	50.38 AV	54	-3.62	-56.19	-55.48	7.93	-44.88
3	4823.87	61.62 PK	74	-12.38	-43.75	-45.62	7.93	-33.64
4	4823.87	51.06 AV	54	-2.94	-55.32	-54.97	7.93	-44.2
5	14475.82	61.42 PK	74	-12.58	-43.83	-46	7.93	-33.84
6	14475.82	49.15 AV	54	-4.85	-56.37	-57.87	7.93	-46.11
7	23670.7	62.11 PK	74	-11.89	-45.06	-43.29	7.93	-33.15
8	23670.7	50.03 AV	54	-3.97	-54.61	-58.62	7.93	-45.23


Note: Margin value = Emission Level - Limit value

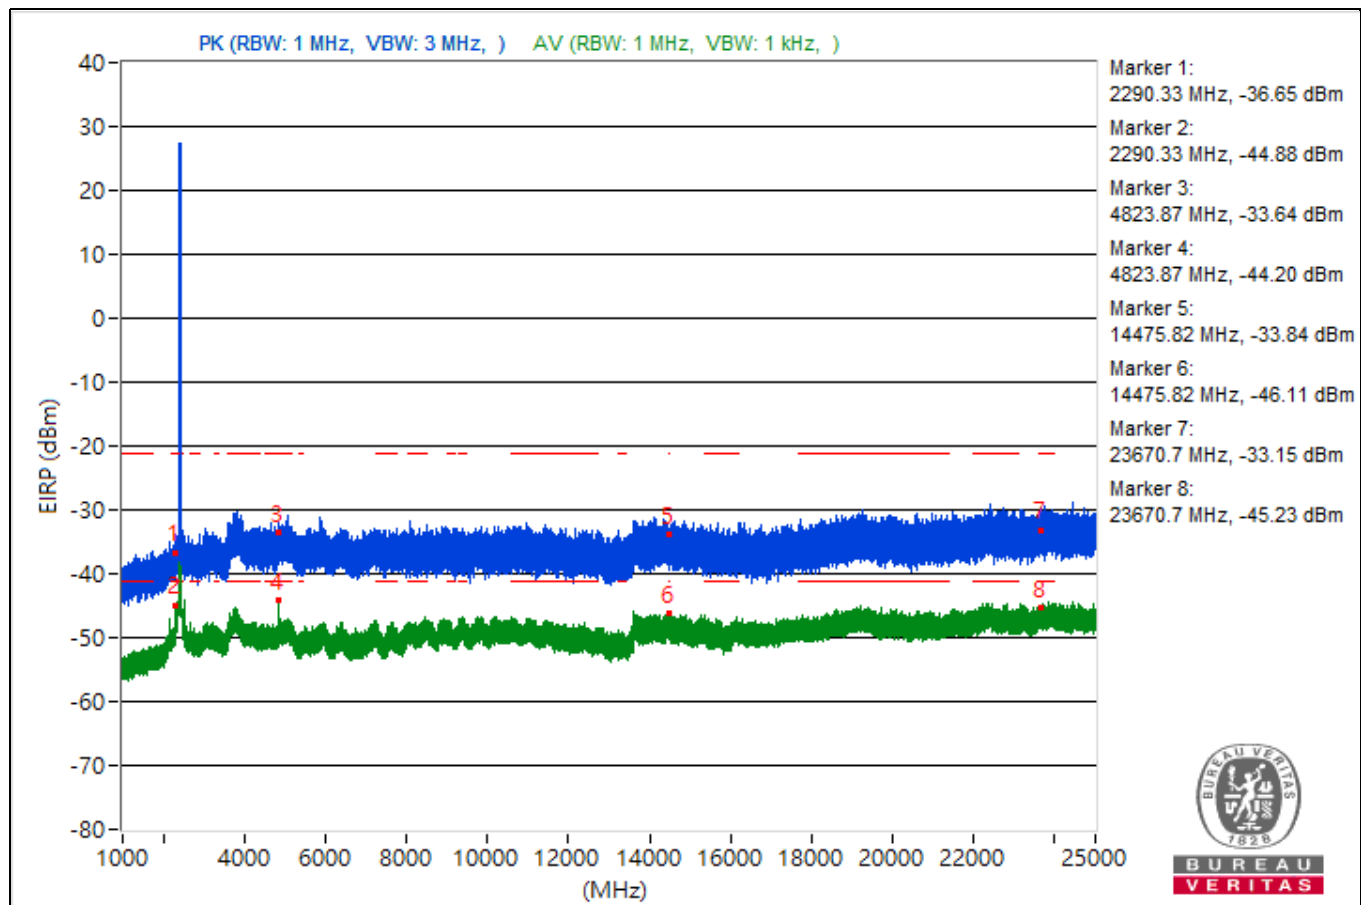

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2317.48	58.74 PK	74	-15.26	-46.44	-48.81	7.93	-36.52
2	2317.48	48.78 AV	54	-5.22	-58.13	-56.82	7.93	-46.48
3	4873.88	63.01 PK	74	-10.99	-44.61	-42.12	7.93	-32.25
4	4873.88	49.8 AV	54	-4.2	-57.3	-55.66	7.93	-45.46
5	14481.6	60.38 PK	74	-13.62	-46.71	-45.08	7.93	-34.88
6	14481.6	48.89 AV	54	-5.11	-56.53	-58.26	7.93	-46.37
7	23976.2	61.52 PK	74	-12.48	-45.77	-43.8	7.93	-33.74
8	23976.2	50.5 AV	54	-3.5	-54.25	-57.89	7.93	-44.76


Note: Margin value = Emission Level - Limit value

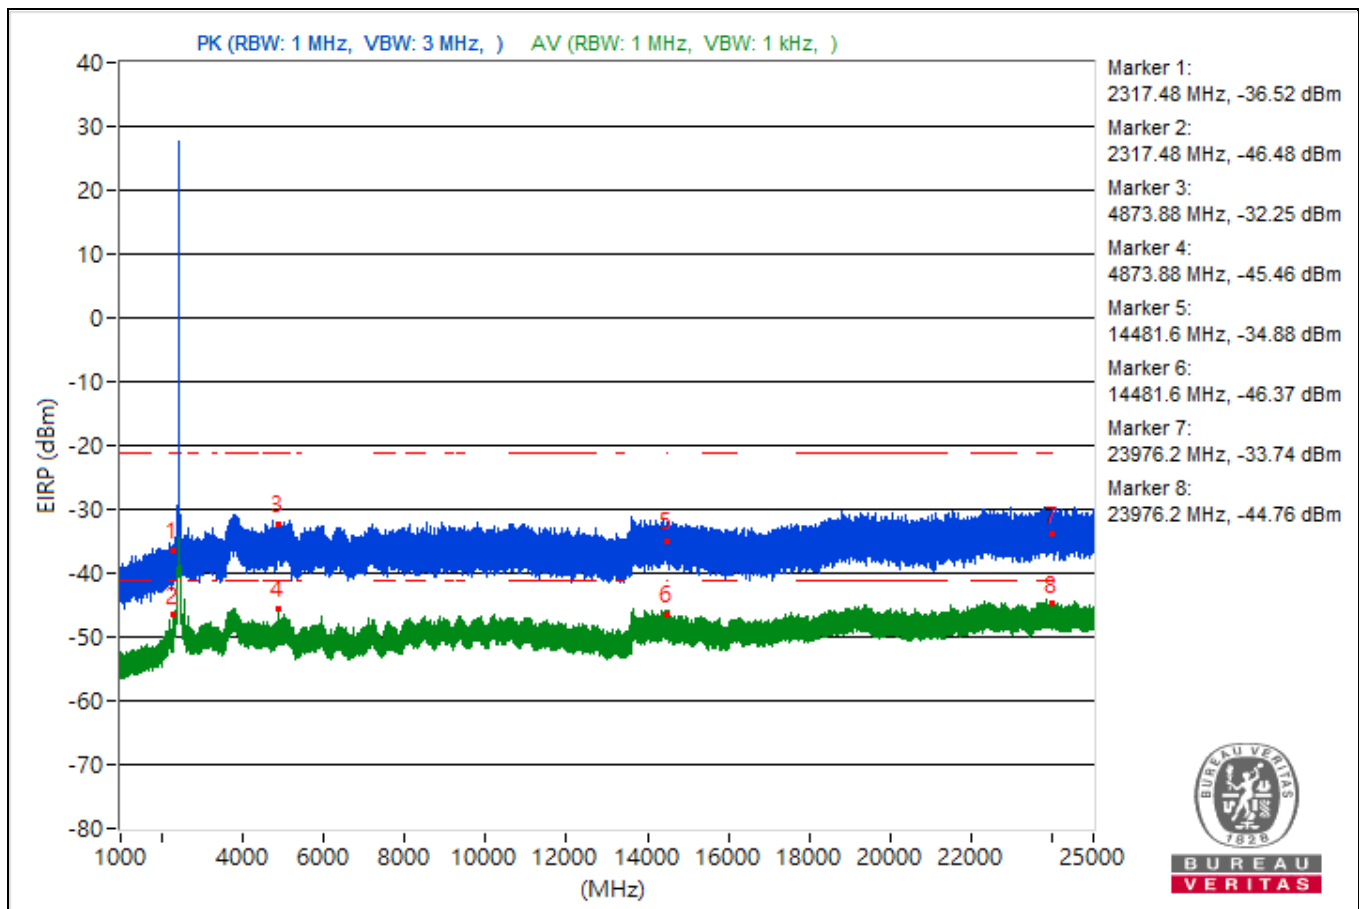

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.88	57.72 PK	74	-16.28	-47.92	-49.13	7.93	-37.54
2	2339.88	48.83 AV	54	-5.17	-57.73	-57.05	7.93	-46.43
3	4923.73	60.08 PK	74	-13.92	-46.11	-46.13	7.93	-35.18
4	4923.73	51.92 AV	54	-2.08	-54.32	-54.24	7.93	-43.34
5	14476.36	59.8 PK	74	-14.2	-45.72	-47.21	7.93	-35.46
6	14476.36	48.34 AV	54	-5.66	-56.45	-59.97	7.93	-46.92
7	23649.8	61.72 PK	74	-12.28	-43.64	-45.51	7.93	-33.54
8	23649.8	50.48 AV	54	-3.52	-54.38	-57.68	7.93	-44.78


Note: Margin value = Emission Level - Limit value

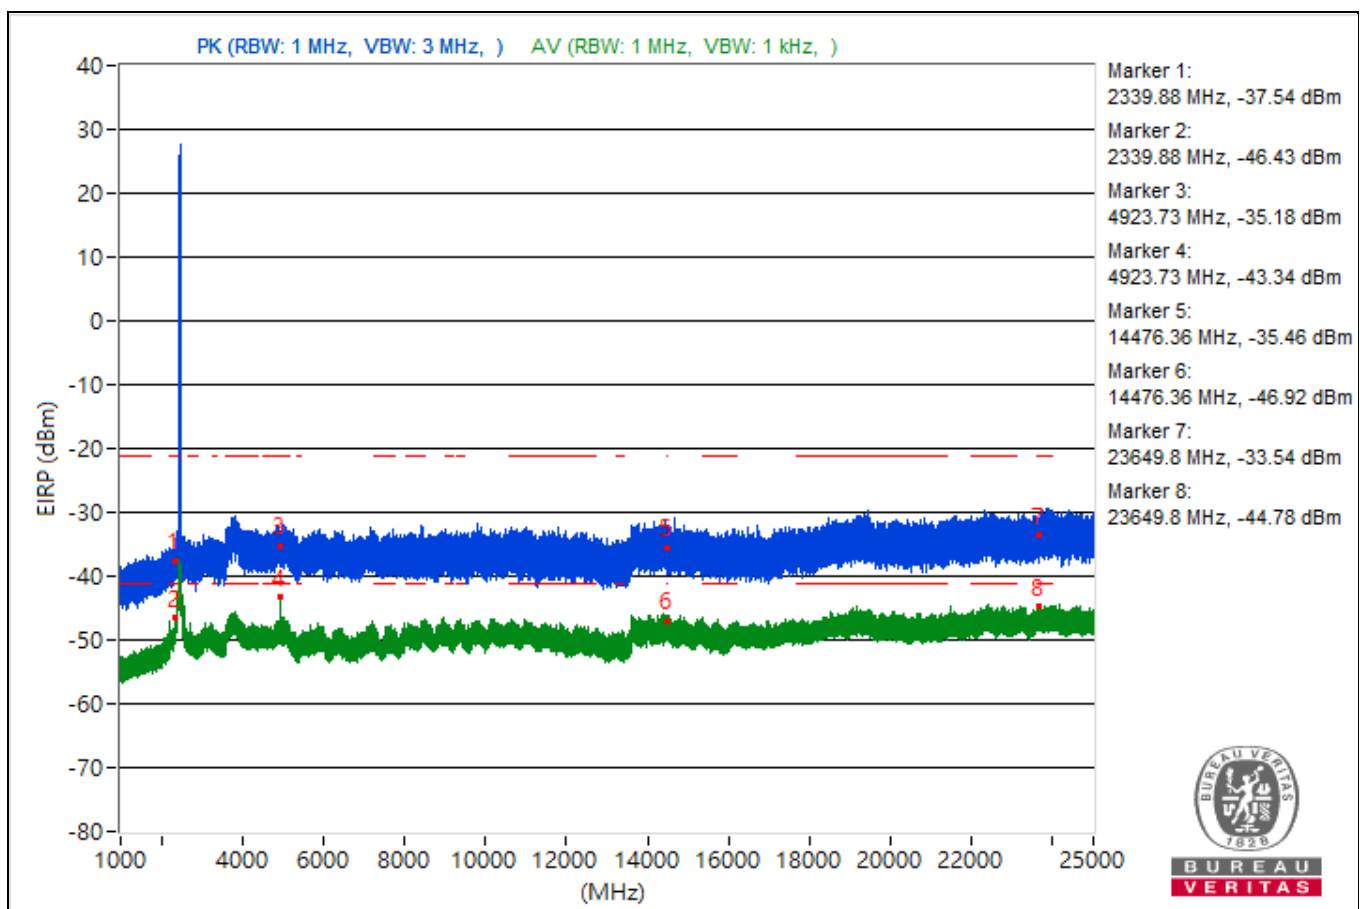

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2227.8	57.55 PK	74	-16.45	-47.98	-49.46	7.93	-37.71
2	2227.8	49.48 AV	54	-4.52	-56.55	-56.9	7.93	-45.78
3	4933.77	60.83 PK	74	-13.17	-46.2	-44.68	7.93	-34.43
4	4933.77	51.44 AV	54	-2.56	-54.95	-54.59	7.93	-43.82
5	14483.82	57.25 PK	74	-16.75	-48.79	-49.12	7.93	-38.01
6	14483.82	48.32 AV	54	-5.68	-60.7	-56.18	7.93	-46.94
7	22421.4	61.88 PK	74	-12.12	-43.82	-44.88	7.93	-33.38
8	22421.4	51 AV	54	-3	-57.08	-53.89	7.93	-44.26


Note: Margin value = Emission Level - Limit value

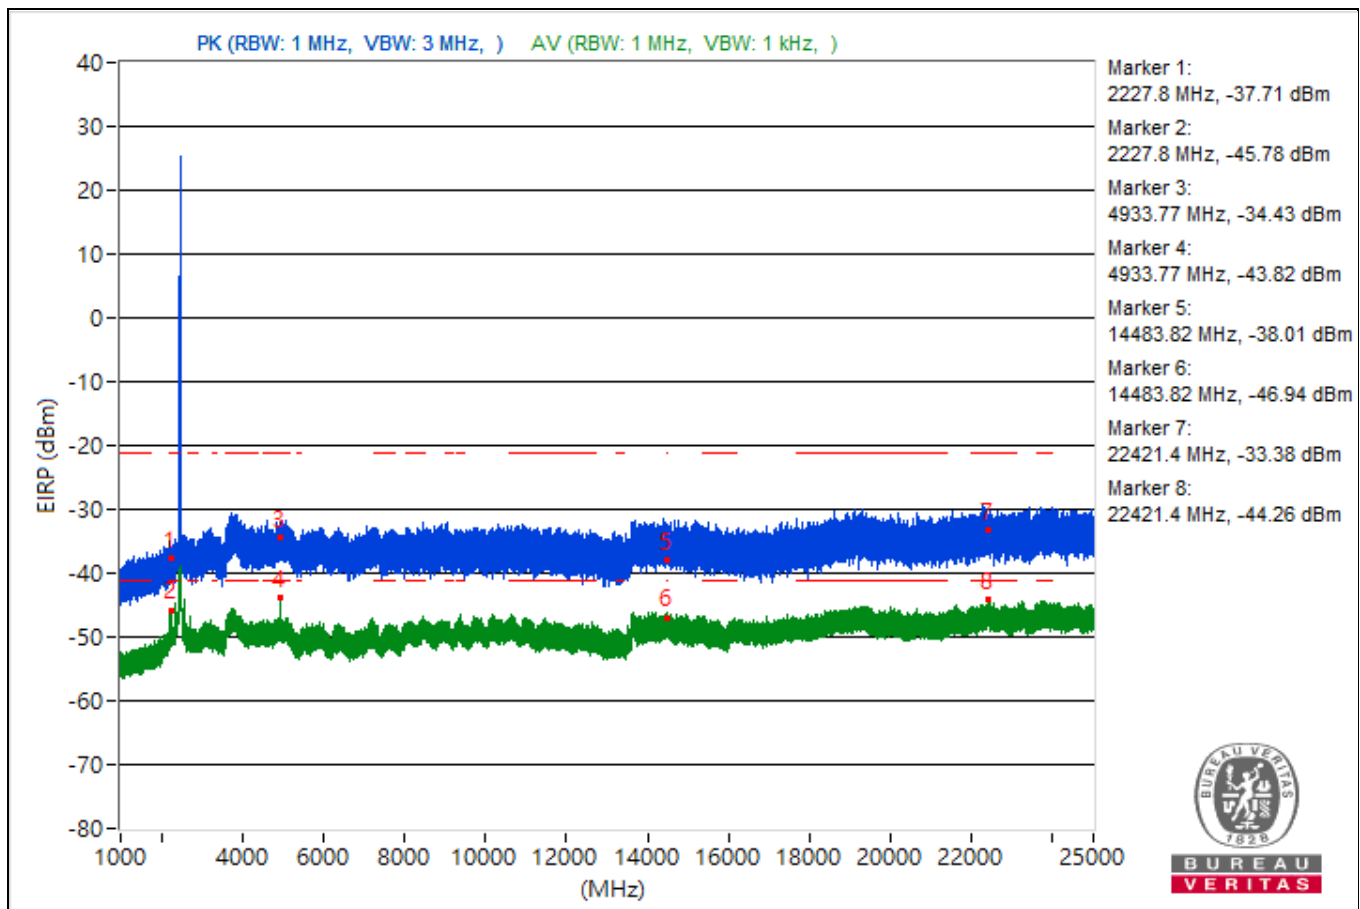

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2233.24	56.17 PK	74	-17.83	-48.42	-52.6	7.93	-39.09
2	2233.24	48.28 AV	54	-5.72	-58.26	-57.61	7.93	-46.98
3	3810.89	60.2 PK	74	-13.8	-46.93	-45.24	7.93	-35.06
4	3810.89	49.54 AV	54	-4.46	-55.73	-57.84	7.93	-45.72
5	14490.22	58.71 PK	74	-15.29	-47.47	-47.52	7.93	-36.55
6	14490.22	48.56 AV	54	-5.44	-59.56	-56.31	7.93	-46.7
7	22210.8	60.12 PK	74	-13.88	-45.56	-46.68	7.93	-35.14
8	22210.8	50.48 AV	54	-3.52	-54.2	-58.08	7.93	-44.78


Note: Margin value = Emission Level - Limit value

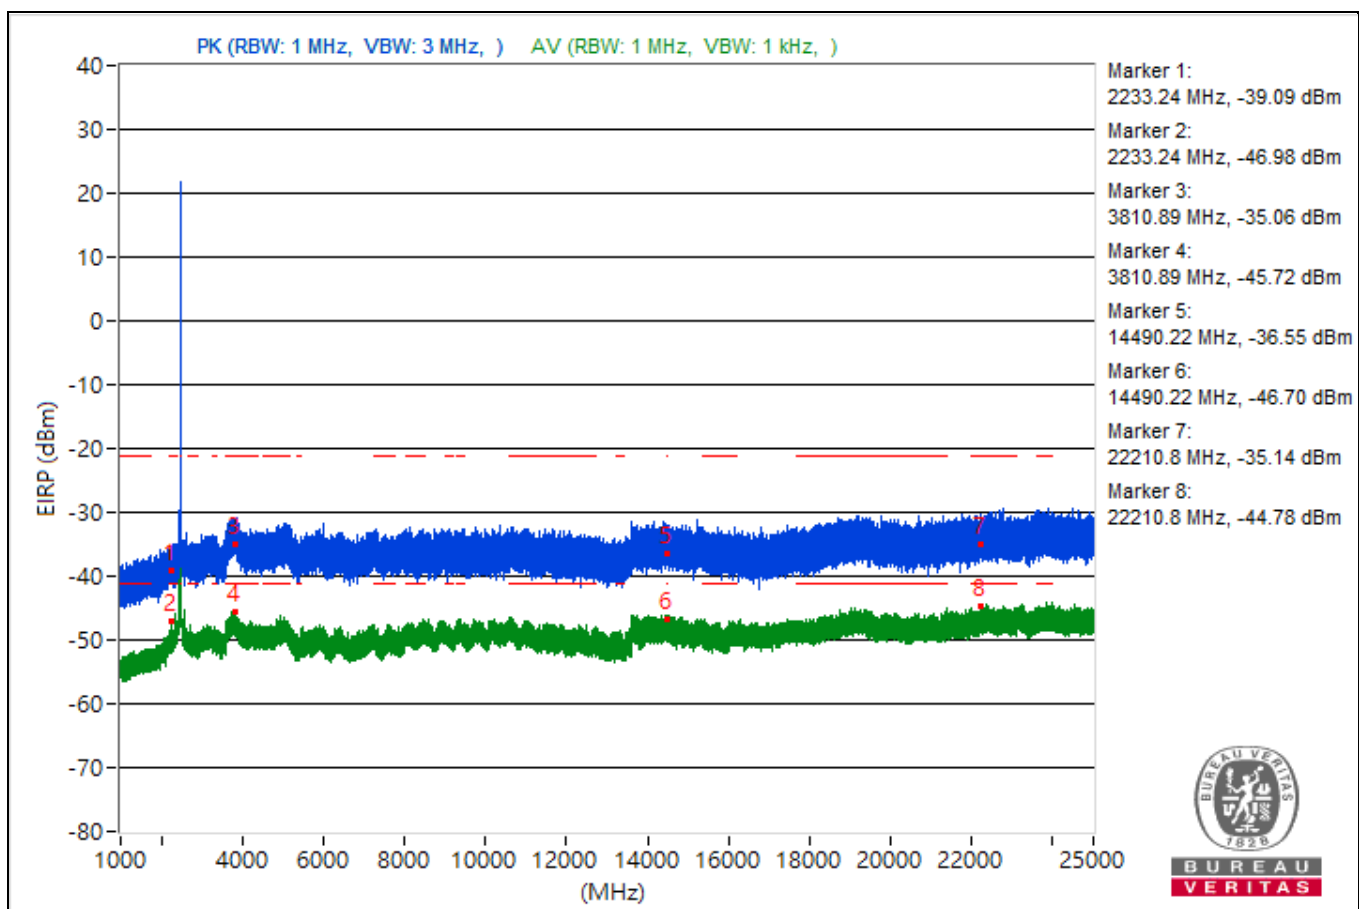

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2293.83	56.81 PK	74	-17.19	-49.72	-49.08	7.93	-38.45
2	2293.83	48.89 AV	54	-5.11	-56.77	-57.92	7.93	-46.37
3	3796.66	60.96 PK	74	-13.04	-44.55	-46.07	7.93	-34.3
4	3796.66	49.6 AV	54	-4.4	-58.56	-55.26	7.93	-45.66
5	8455.38	61.67 PK	74	-12.33	-46.13	-43.36	7.93	-33.59
6	8455.38	48.94 AV	54	-5.06	-56.3	-58.49	7.93	-46.32
7	23634.3	61.71 PK	74	-12.29	-44.37	-44.61	7.93	-33.55
8	23634.3	50.4 AV	54	-3.6	-54.06	-58.75	7.93	-44.86


Note: Margin value = Emission Level - Limit value

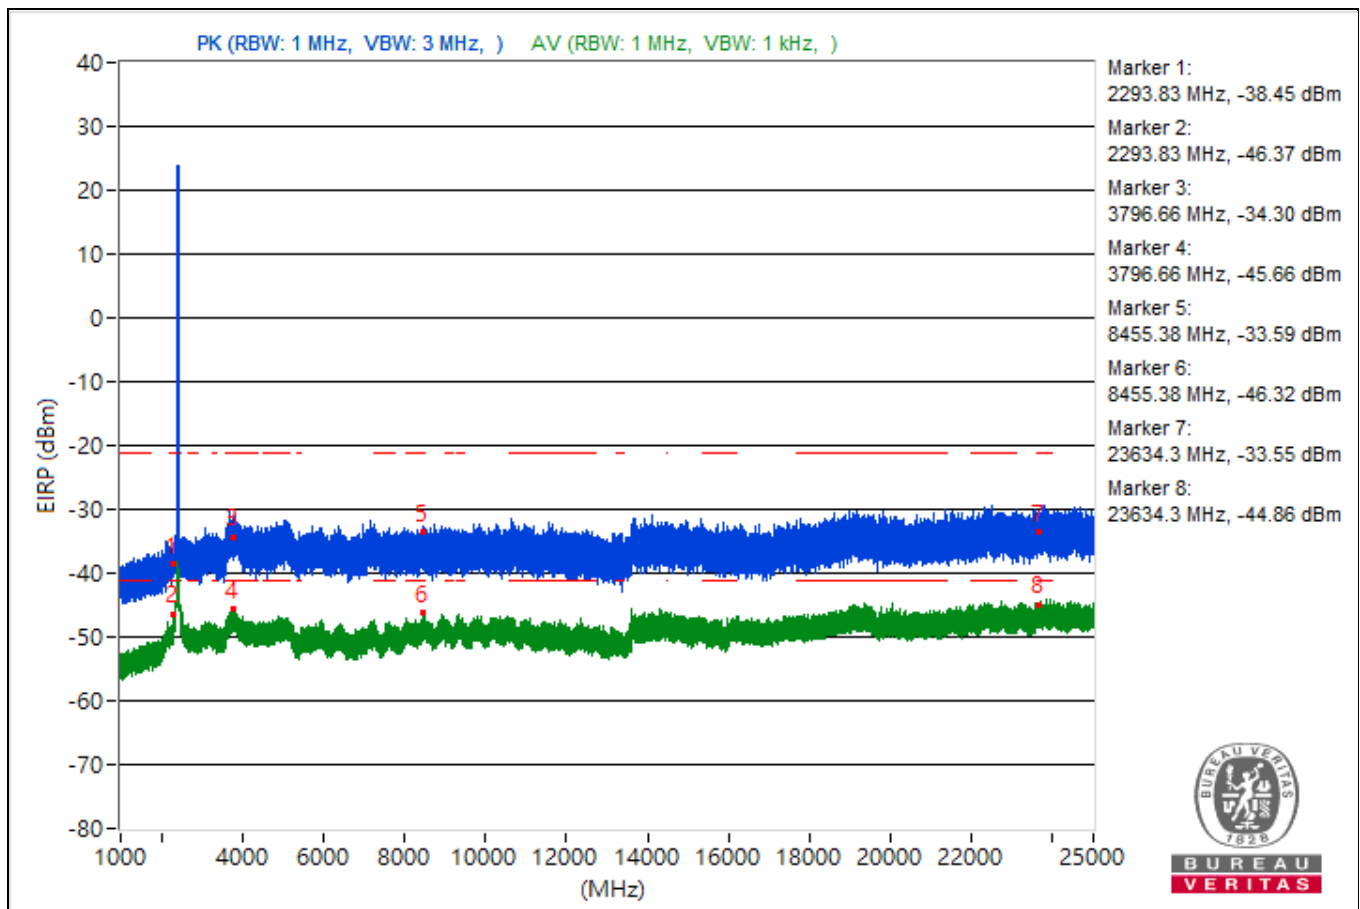

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2320.98	57.26 PK	74	-16.74	-47.88	-50.35	7.93	-38
2	2320.98	48.65 AV	54	-5.35	-58.2	-56.98	7.93	-46.61
3	3784.83	61.27 PK	74	-12.73	-45.84	-44.17	7.93	-33.99
4	3784.83	49.94 AV	54	-4.06	-56.43	-56.09	7.93	-45.32
5	14476.8	61.71 PK	74	-12.29	-43.96	-45.09	7.93	-33.55
6	14476.8	48.83 AV	54	-5.17	-56	-59.37	7.93	-46.43
7	23797	61.5 PK	74	-12.5	-44.81	-44.59	7.93	-33.76
8	23797	50.52 AV	54	-3.48	-58.19	-54.1	7.93	-44.74


Note: Margin value = Emission Level - Limit value

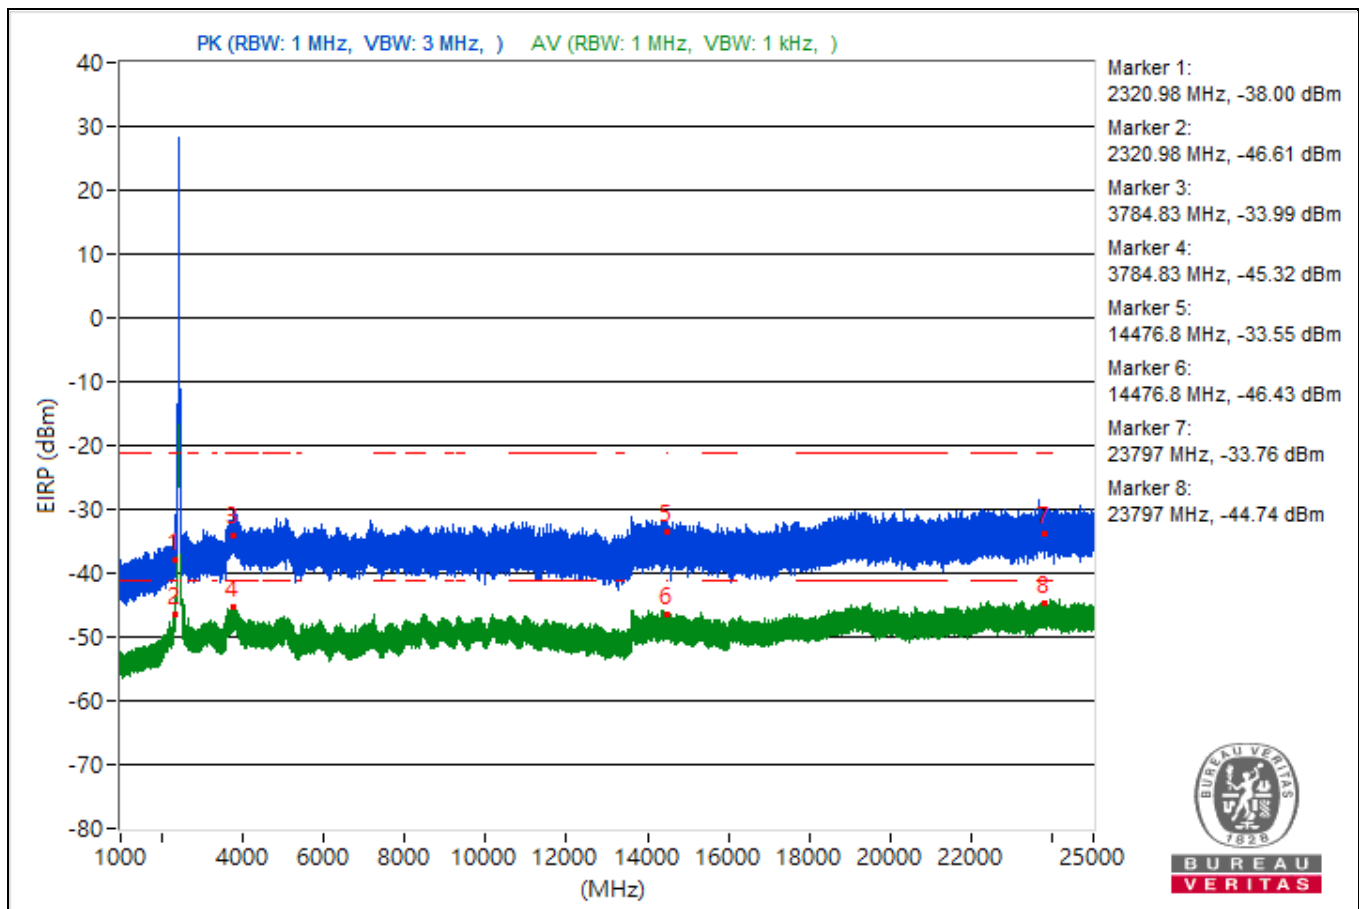

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.57	59.05 PK	74	-14.95	-47.58	-46.77	7.93	-36.21
2	2339.57	49.14 AV	54	-4.86	-56.61	-57.57	7.93	-46.12
3	3722.84	61.59 PK	74	-12.41	-43.45	-46.18	7.93	-33.67
4	3722.84	50.15 AV	54	-3.85	-56.5	-55.64	7.93	-45.11
5	14480.89	58.42 PK	74	-15.58	-46.77	-49.1	7.93	-36.84
6	14480.89	48.26 AV	54	-5.74	-59.8	-56.64	7.93	-47
7	23927	62.59 PK	74	-11.41	-41.91	-46.44	7.93	-32.67
8	23927	50.39 AV	54	-3.61	-54.23	-58.34	7.93	-44.87


Note: Margin value = Emission Level - Limit value

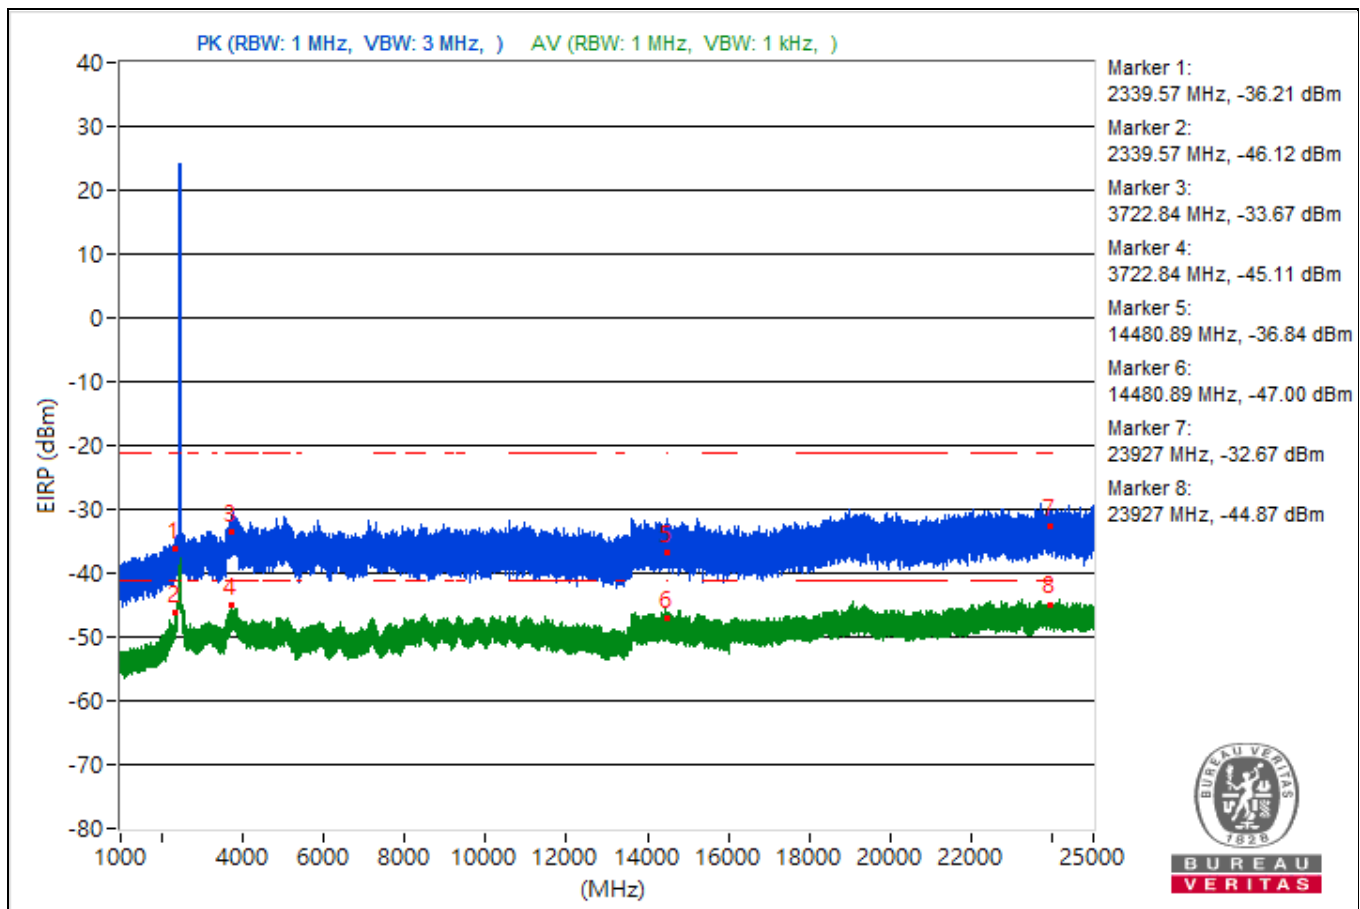

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2228.03	57.43 PK	74	-16.57	-50.7	-47.44	7.93	-37.83
2	2228.03	48.03 AV	54	-5.97	-58.43	-57.93	7.93	-47.23
3	3778.53	62.32 PK	74	-11.68	-45.89	-42.51	7.93	-32.94
4	3778.53	49.56 AV	54	-4.44	-55.61	-57.99	7.93	-45.7
5	15376	61.41 PK	74	-12.59	-46.01	-43.85	7.93	-33.85
6	15376	48.66 AV	54	-5.34	-59.82	-56.05	7.93	-46.6
7	22416.5	61.23 PK	74	-12.77	-46.9	-43.64	7.93	-34.03
8	22416.5	50.54 AV	54	-3.46	-54.59	-57.08	7.93	-44.72


Note: Margin value = Emission Level - Limit value

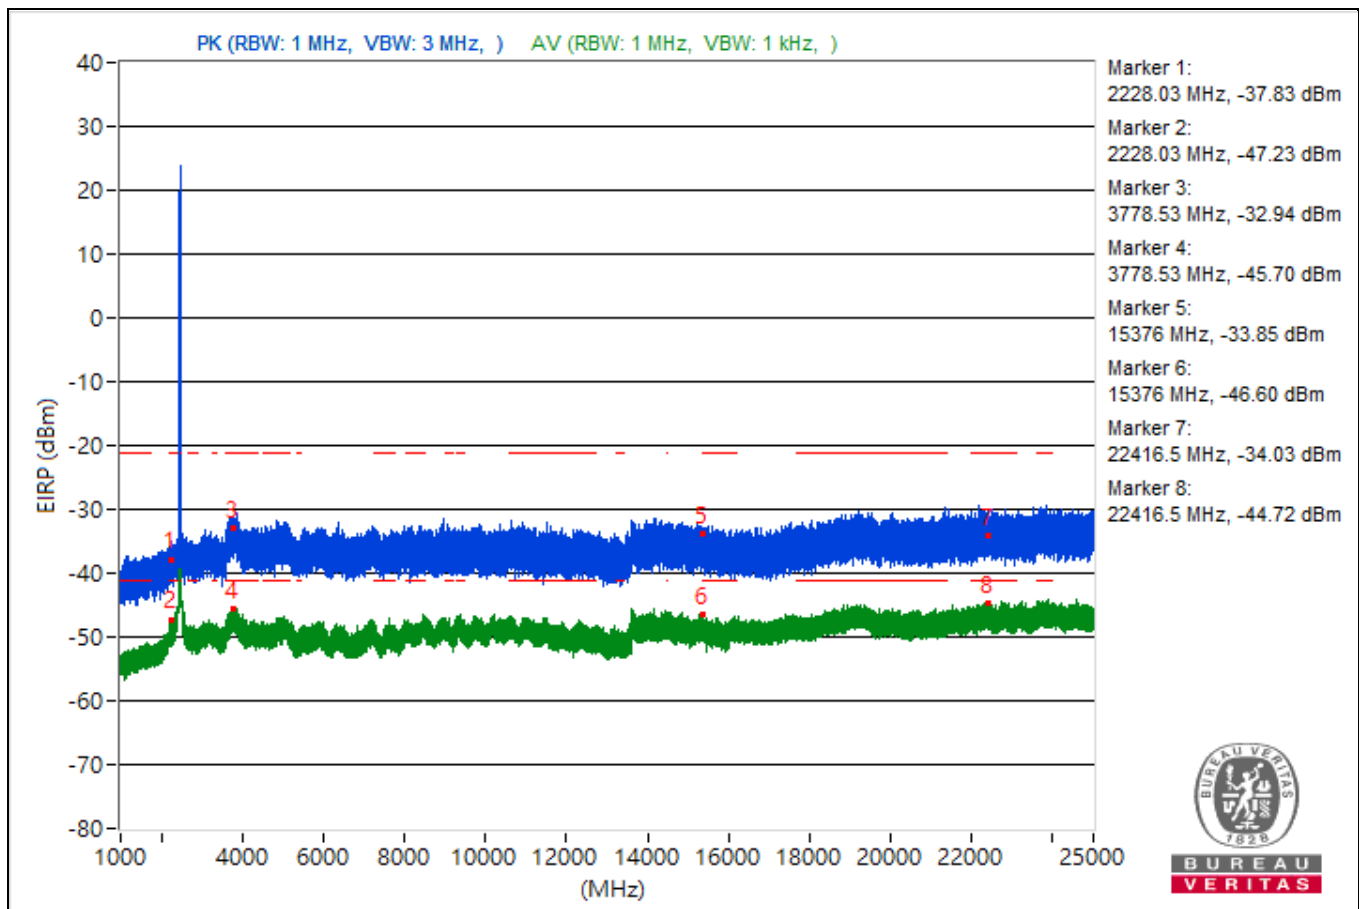

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2233.48	58.47 PK	74	-15.53	-48.24	-47.27	7.93	-36.79
2	2233.48	47.46 AV	54	-6.54	-59.32	-58.23	7.93	-47.8
3	3818.43	59.1 PK	74	-14.9	-48.93	-45.82	7.93	-36.16
4	3818.43	49.57 AV	54	-4.43	-58.42	-55.37	7.93	-45.69
5	8158.76	59.73 PK	74	-14.27	-44.52	-50.14	7.93	-35.53
6	8158.76	48.67 AV	54	-5.33	-59.91	-56	7.93	-46.59
7	23709	63.6 PK	74	-10.4	-42.47	-42.72	7.93	-31.66
8	23709	50.78 AV	54	-3.22	-53.66	-58.44	7.93	-44.48


Note: Margin value = Emission Level - Limit value

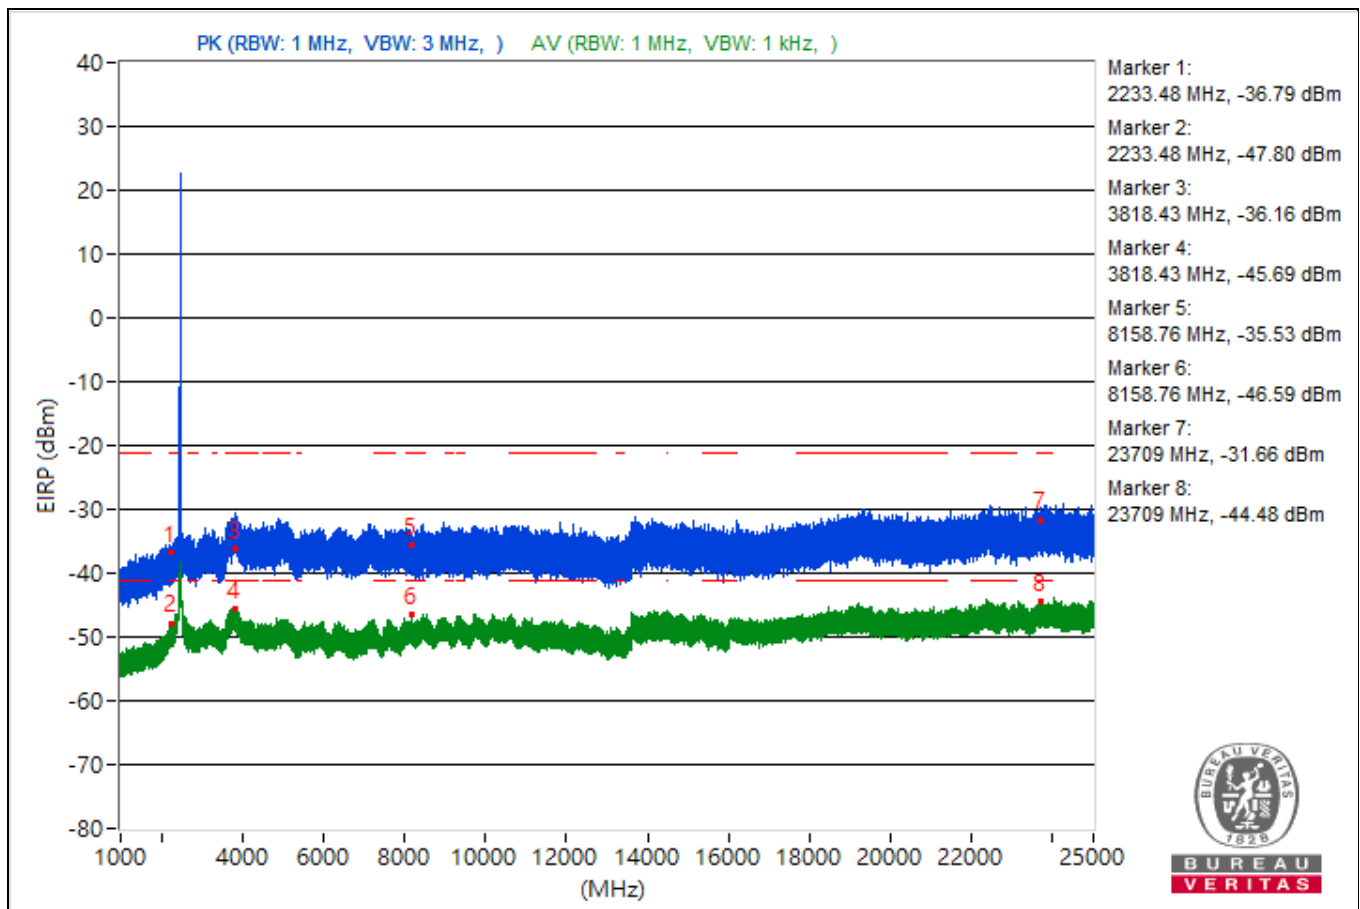

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2293.37	55.33 PK	74	-18.67	-47.01	-48.9	4.92	-39.93
2	2293.37	46.08 AV	54	-7.92	-56.62	-57.66	4.92	-49.18
3	3771.07	58.7 PK	74	-15.3	-45.96	-43.4	4.92	-36.56
4	3771.07	46.21 AV	54	-7.79	-59.07	-55.57	4.92	-49.05
5	8482.4	57.29 PK	74	-16.71	-44.32	-48.41	4.92	-37.97
6	8482.4	45.48 AV	54	-8.52	-56.42	-59.56	4.92	-49.78
7	23894.4	58.65 PK	74	-15.35	-43.35	-46.19	4.92	-36.61
8	23894.4	47.62 AV	54	-6.38	-53.94	-58.21	4.92	-47.64


Note: Margin value = Emission Level - Limit value

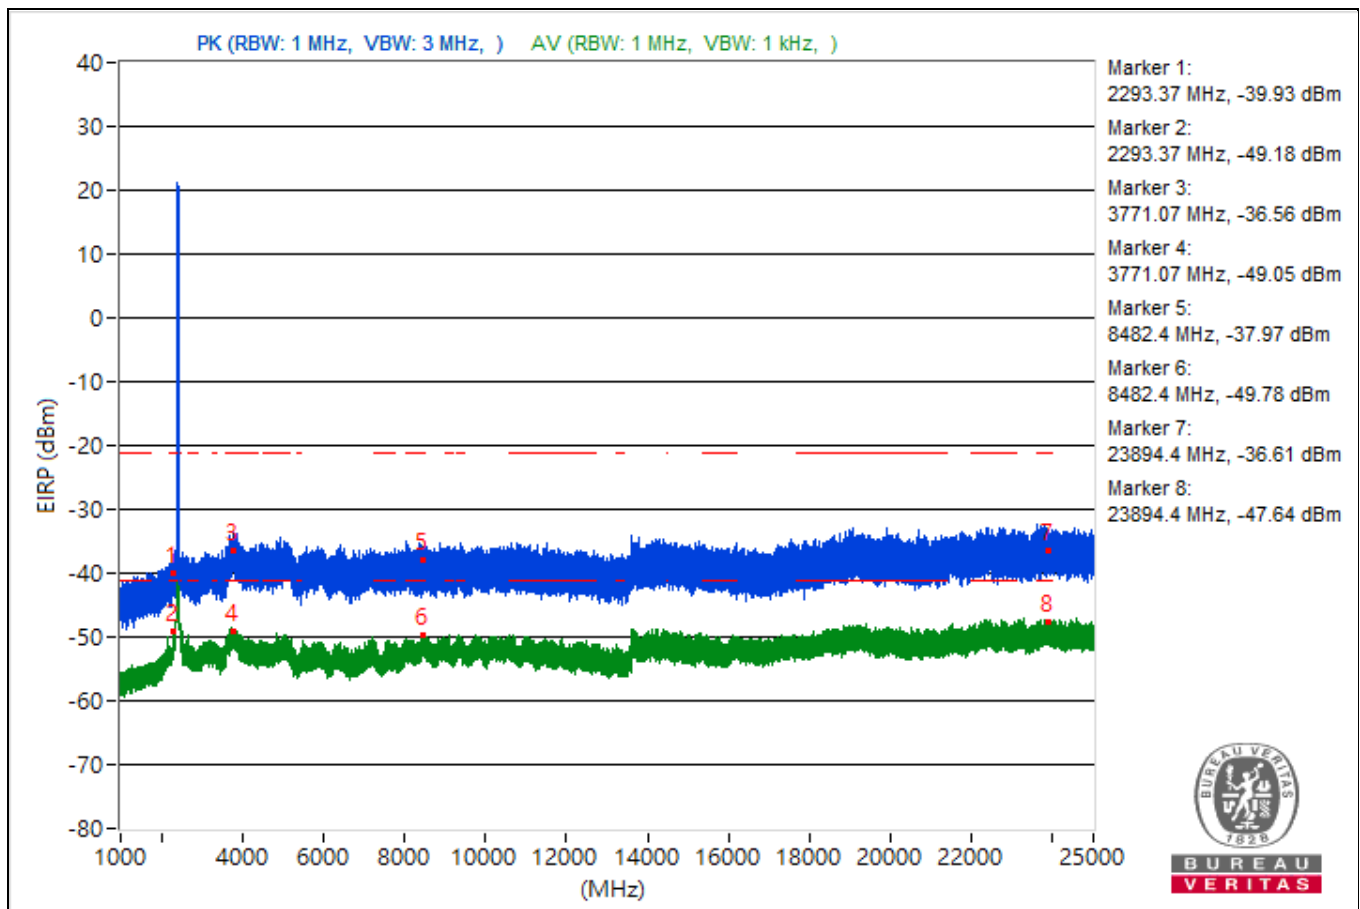

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2321.44	55.29 PK	74	-18.71	-48.09	-47.72	4.92	-39.97
2	2321.44	45.76 AV	54	-8.24	-58.22	-56.77	4.92	-49.5
3	3807	56.97 PK	74	-17.03	-47.23	-45.41	4.92	-38.29
4	3807	46.79 AV	54	-7.21	-57.58	-55.47	4.92	-48.47
5	10626.76	56.25 PK	74	-17.75	-48.84	-45.63	4.92	-39.01
6	10626.76	46.2 AV	54	-7.8	-58.87	-55.68	4.92	-49.06
7	23802.1	59.64 PK	74	-14.36	-41.96	-46.06	4.92	-35.62
8	23802.1	48.5 AV	54	-5.5	-54.26	-55.17	4.92	-46.76


Note: Margin value = Emission Level - Limit value

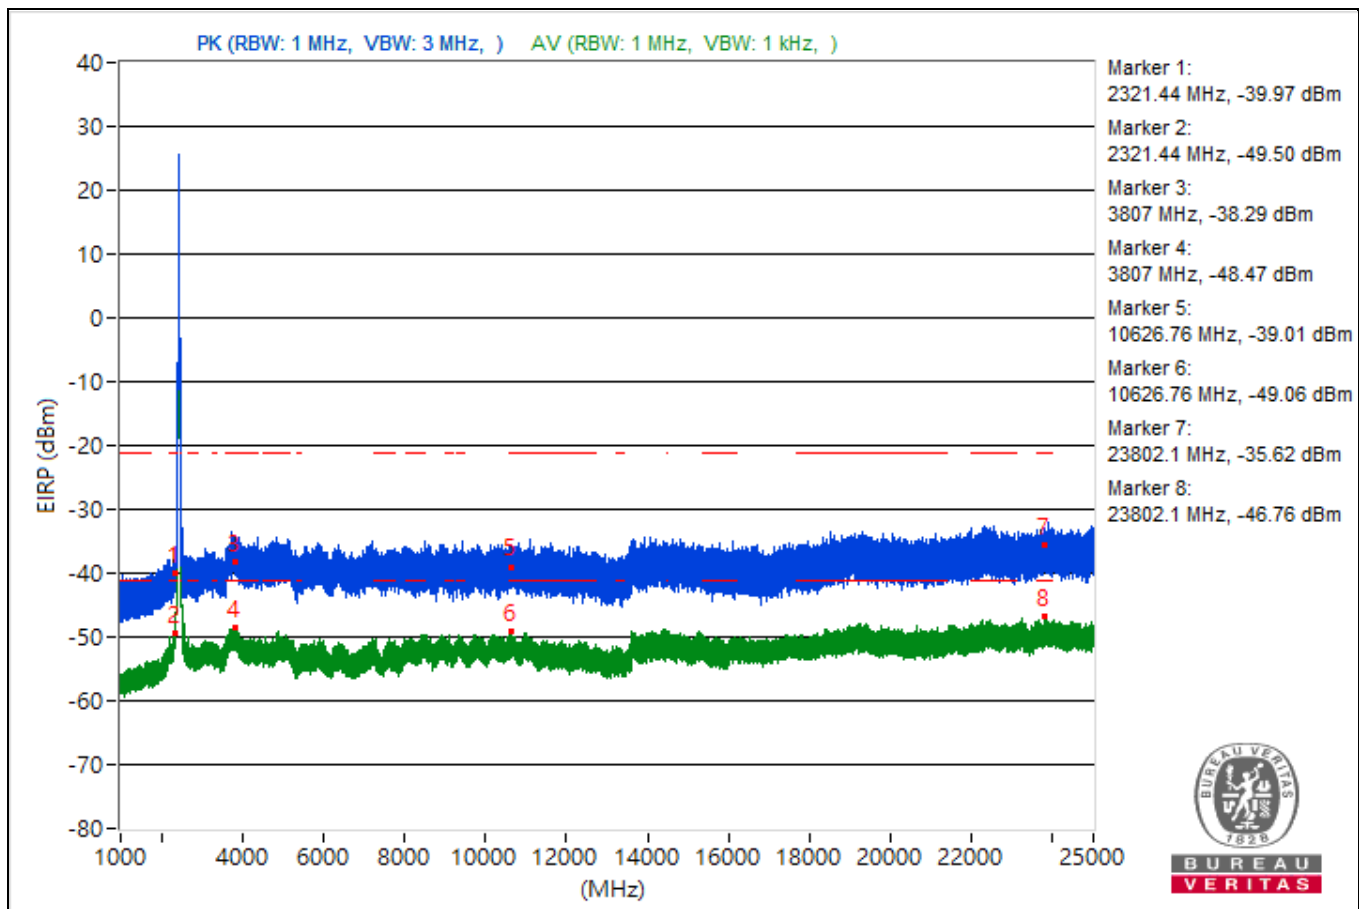

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.24	57.06 PK	74	-16.94	-47.05	-45.36	4.92	-38.2
2	2338.24	46.09 AV	54	-7.91	-57.45	-56.78	4.92	-49.17
3	3779	61.41 PK	74	-12.59	-41.74	-41.81	4.92	-33.85
4	3779	47.16 AV	54	-6.84	-55.15	-57.14	4.92	-48.1
5	14496.18	57.76 PK	74	-16.24	-43.73	-48.27	4.92	-37.5
6	14496.18	45.46 AV	54	-8.54	-56.38	-59.7	4.92	-49.8
7	23697.2	59.36 PK	74	-14.64	-42.7	-45.37	4.92	-35.9
8	23697.2	47.73 AV	54	-6.27	-54.39	-56.88	4.92	-47.53


Note: Margin value = Emission Level - Limit value

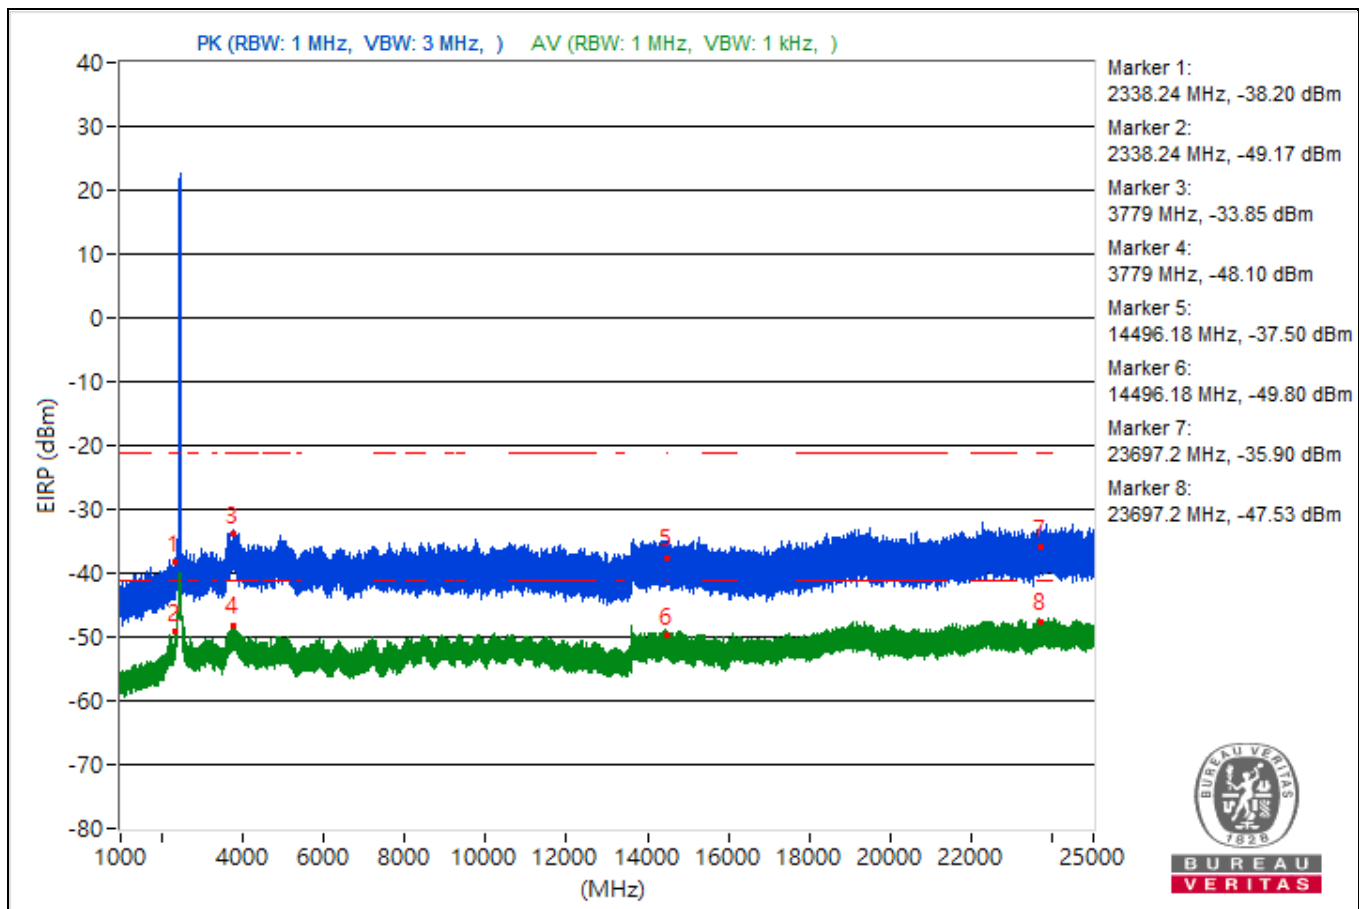

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2230.44	51.39 PK	74	-22.61	-52.27	-51.37	4.92	-43.87
2	2230.44	45.71 AV	54	-8.29	-57.23	-57.75	4.92	-49.55
3	3756.68	59.61 PK	74	-14.39	-44.24	-43	4.92	-35.65
4	3756.68	46.85 AV	54	-7.15	-57.43	-55.46	4.92	-48.41
5	14489.69	57.6 PK	74	-16.4	-46.95	-44.55	4.92	-37.66
6	14489.69	45.67 AV	54	-8.33	-56.32	-59.19	4.92	-49.59
7	23706.7	60.55 PK	74	-13.45	-42.82	-42.48	4.92	-34.71
8	23706.7	47.8 AV	54	-6.2	-57.95	-53.79	4.92	-47.46


Note: Margin value = Emission Level - Limit value

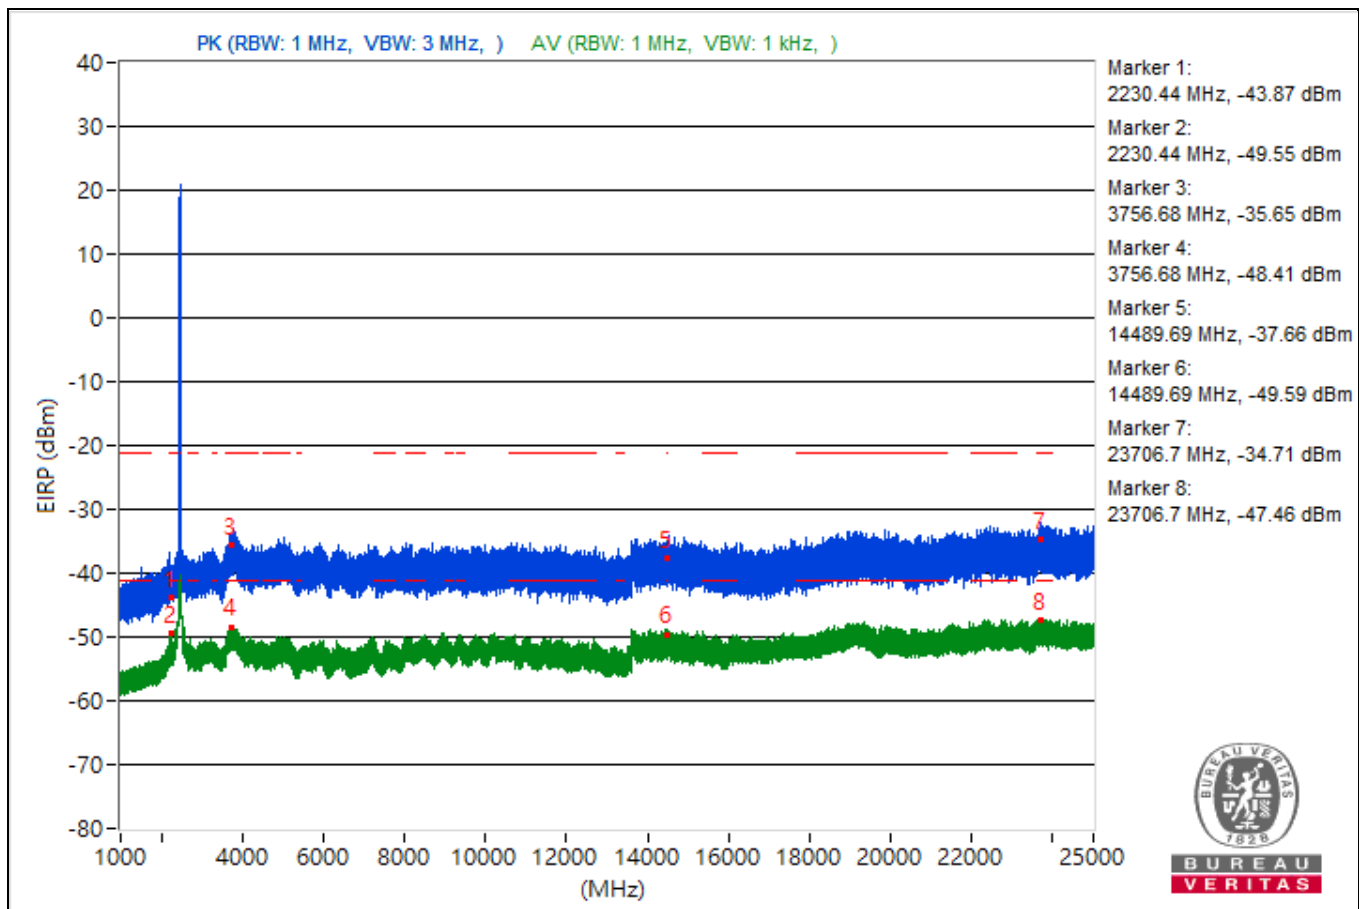

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2233.4	54.17 PK	74	-19.83	-48.29	-49.89	4.92	-41.09
2	2233.4	44.87 AV	54	-9.13	-59.03	-57.72	4.92	-50.39
3	3826.13	57.59 PK	74	-16.41	-45.76	-45.44	4.92	-37.67
4	3826.13	46.75 AV	54	-7.25	-57.94	-55.32	4.92	-48.51
5	14479.38	56.86 PK	74	-17.14	-45.77	-46.98	4.92	-38.4
6	14479.38	46.19 AV	54	-7.81	-56.39	-57.71	4.92	-49.07
7	23696.8	60.89 PK	74	-13.11	-41.78	-42.91	4.92	-34.37
8	23696.8	47.91 AV	54	-6.09	-58.34	-53.5	4.92	-47.35


Note: Margin value = Emission Level - Limit value

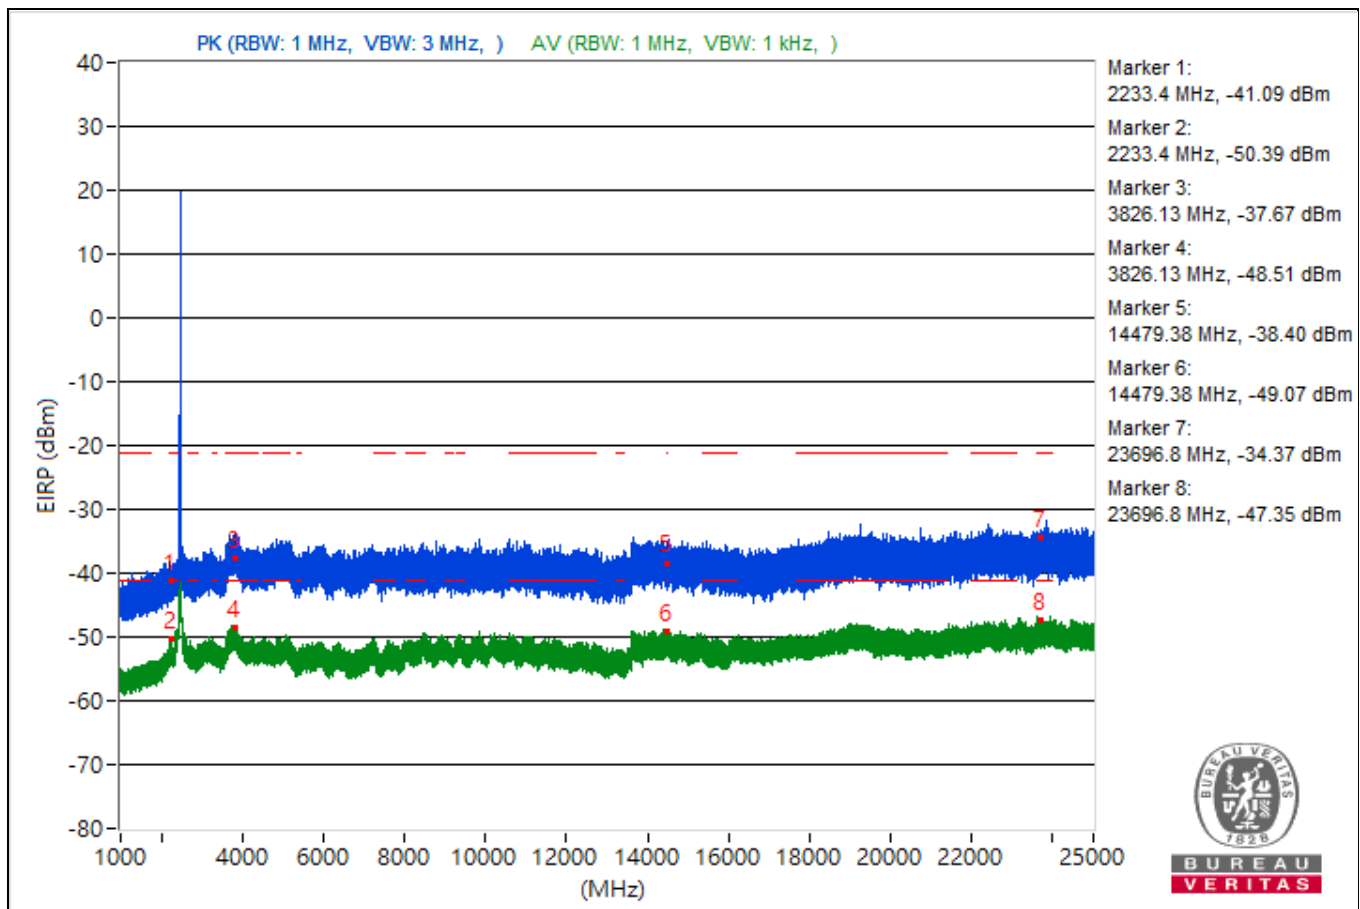

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.7	54.26 PK	74	-19.74	-48.86	-49	4.92	-41
2	2337.7	46.67 AV	54	-7.33	-56.48	-56.56	4.92	-48.59
3	3843.48	58.84 PK	74	-15.16	-44.67	-44.06	4.92	-36.42
4	3843.48	47.07 AV	54	-6.93	-55.24	-57.23	4.92	-48.19
5	14484.18	54.67 PK	74	-19.33	-48.53	-48.51	4.92	-40.59
6	14484.18	46.39 AV	54	-7.61	-57.92	-55.9	4.92	-48.87
7	23698.3	58.47 PK	74	-15.53	-43.35	-46.74	4.92	-36.79
8	23698.3	48.2 AV	54	-5.8	-57.05	-53.6	4.92	-47.06


Note: Margin value = Emission Level - Limit value

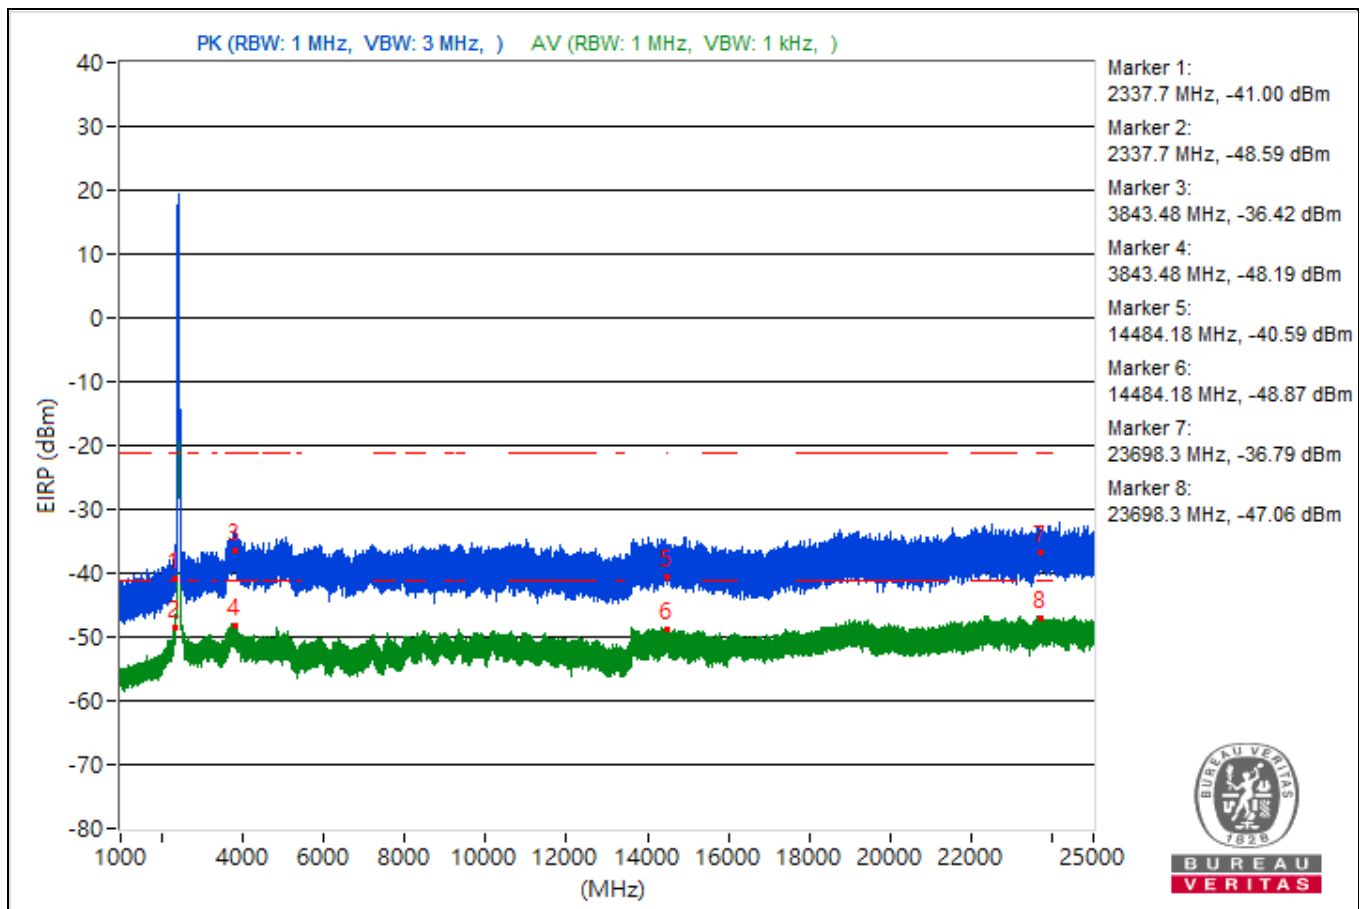

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.09	55.43 PK	74	-18.57	-47.55	-47.99	4.92	-39.83
2	2338.09	46 AV	54	-8	-57.67	-56.75	4.92	-49.26
3	3820.38	57.28 PK	74	-16.72	-45.9	-45.93	4.92	-37.98
4	3820.38	47.29 AV	54	-6.71	-57.1	-54.95	4.92	-47.97
5	14492.53	56.49 PK	74	-17.51	-45.78	-47.85	4.92	-38.77
6	14492.53	46.91 AV	54	-7.09	-57.04	-55.63	4.92	-48.35
7	23643.3	58.78 PK	74	-15.22	-44.02	-44.84	4.92	-36.48
8	23643.3	48.59 AV	54	-5.41	-55.47	-53.87	4.92	-46.67


Note: Margin value = Emission Level - Limit value

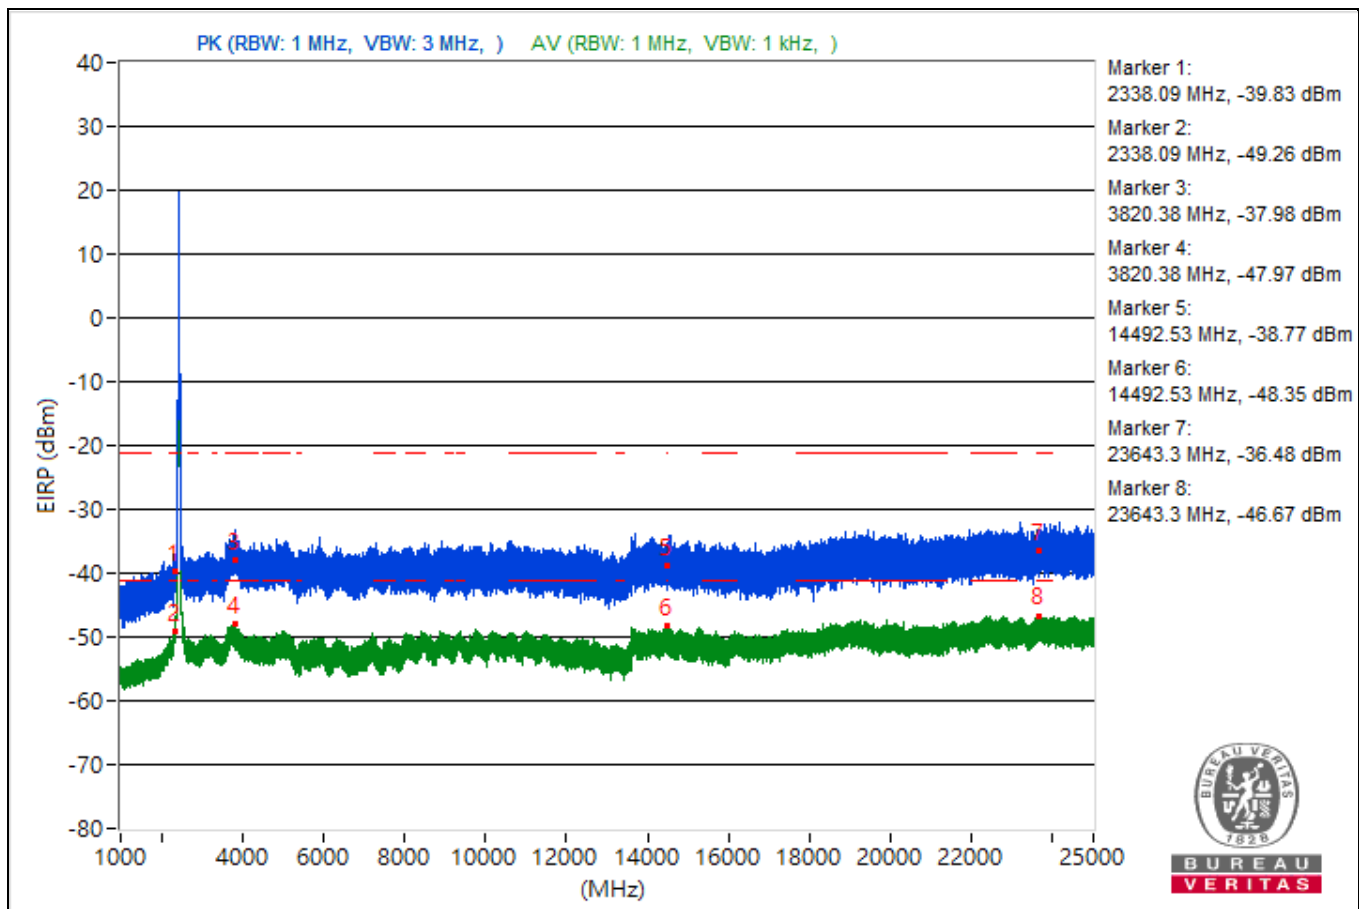

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2334.74	53.39 PK	74	-20.61	-50.48	-49.21	4.92	-41.87
2	2334.74	46.18 AV	54	-7.82	-57.5	-56.57	4.92	-49.08
3	3761.73	58.19 PK	74	-15.81	-47.92	-43.27	4.92	-37.07
4	3761.73	46.97 AV	54	-7.03	-58.44	-54.76	4.92	-48.29
5	14492.09	57.69 PK	74	-16.31	-44.85	-46.26	4.92	-37.57
6	14492.09	46.26 AV	54	-7.74	-55.43	-59.25	4.92	-49
7	23982.8	58.93 PK	74	-15.07	-46.45	-42.82	4.92	-36.33
8	23982.8	48.42 AV	54	-5.58	-53.87	-55.91	4.92	-46.84


Note: Margin value = Emission Level - Limit value

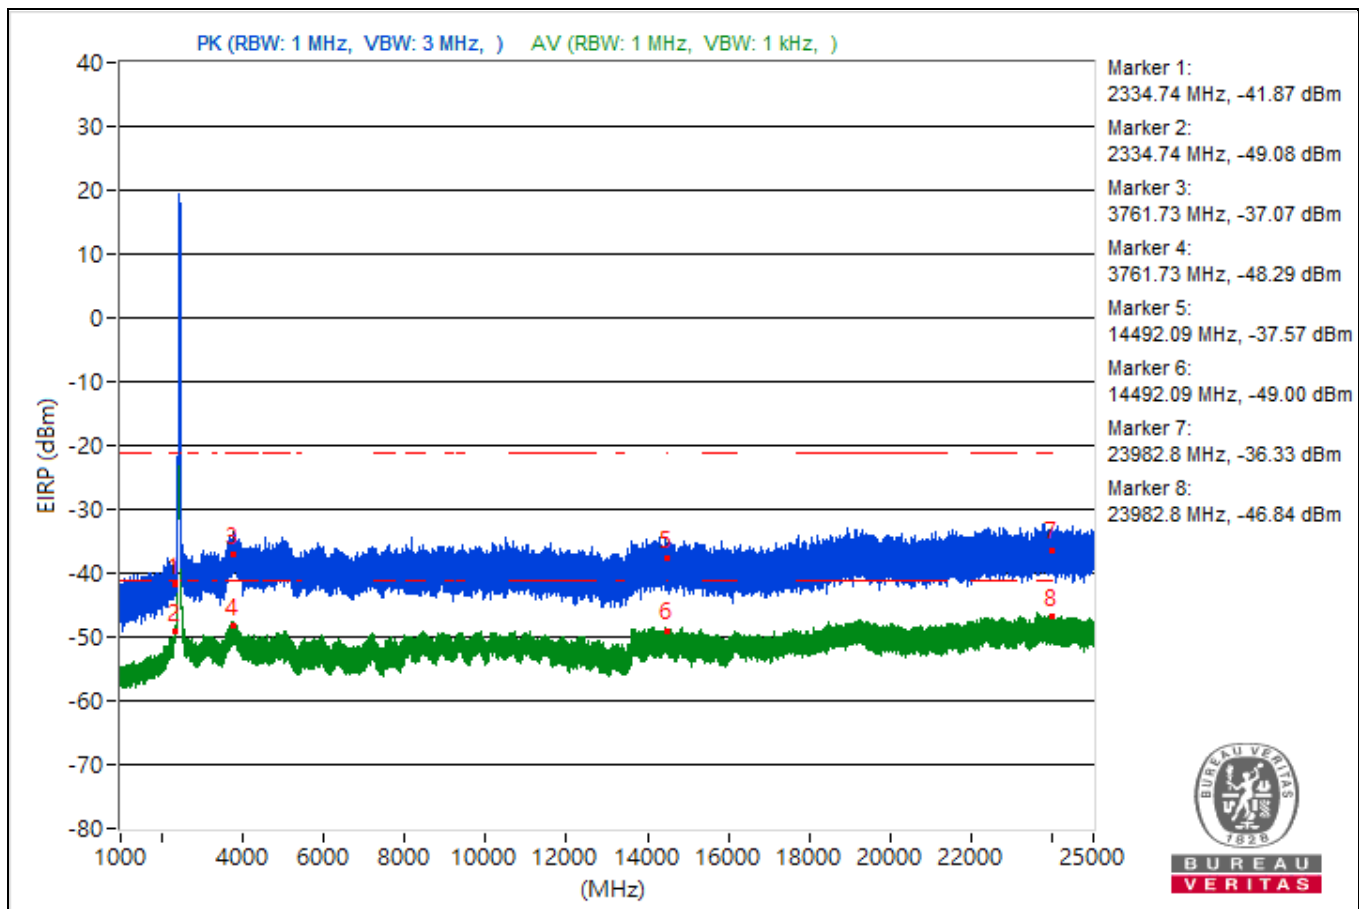

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.09	55.79 PK	74	-18.21	-45.79	-49.97	4.92	-39.47
2	2338.09	46.04 AV	54	-7.96	-57.55	-56.8	4.92	-49.22
3	3813.46	56.92 PK	74	-17.08	-46.6	-45.97	4.92	-38.34
4	3813.46	47.71 AV	54	-6.29	-54.58	-56.62	4.92	-47.55
5	15359.56	57.42 PK	74	-16.58	-45.21	-46.41	4.92	-37.84
6	15359.56	46.24 AV	54	-7.76	-58	-56.11	4.92	-49.02
7	22339.4	56.73 PK	74	-17.27	-46.29	-46.64	4.92	-38.53
8	22339.4	48.23 AV	54	-5.77	-57.74	-53.28	4.92	-47.03


Note: Margin value = Emission Level - Limit value

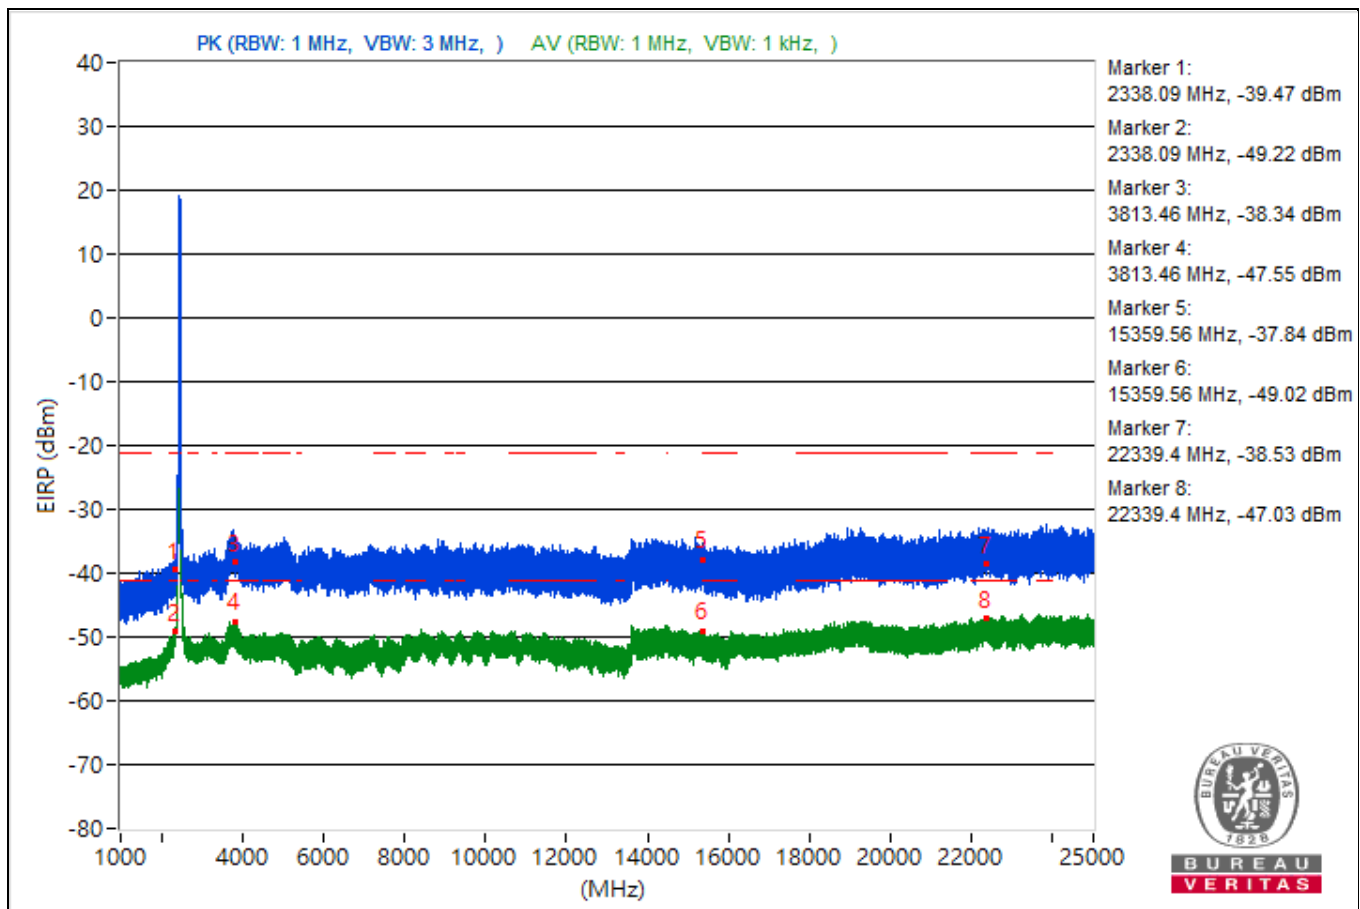

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.4	54.72 PK	74	-19.28	-49.17	-47.87	4.92	-40.54
2	2331.4	45.27 AV	54	-8.73	-57.43	-58.46	4.92	-49.99
3	3781.33	56.4 PK	74	-17.6	-46.35	-47.29	4.92	-38.86
4	3781.33	47.23 AV	54	-6.77	-57	-55.12	4.92	-48.03
5	14481.24	55.73 PK	74	-18.27	-46.95	-48.04	4.92	-39.53
6	14481.24	46.56 AV	54	-7.44	-55.72	-57.79	4.92	-48.7
7	23671.4	59.83 PK	74	-14.17	-44.72	-42.33	4.92	-35.43
8	23671.4	48.51 AV	54	-5.49	-57.45	-53	4.92	-46.75


Note: Margin value = Emission Level - Limit value

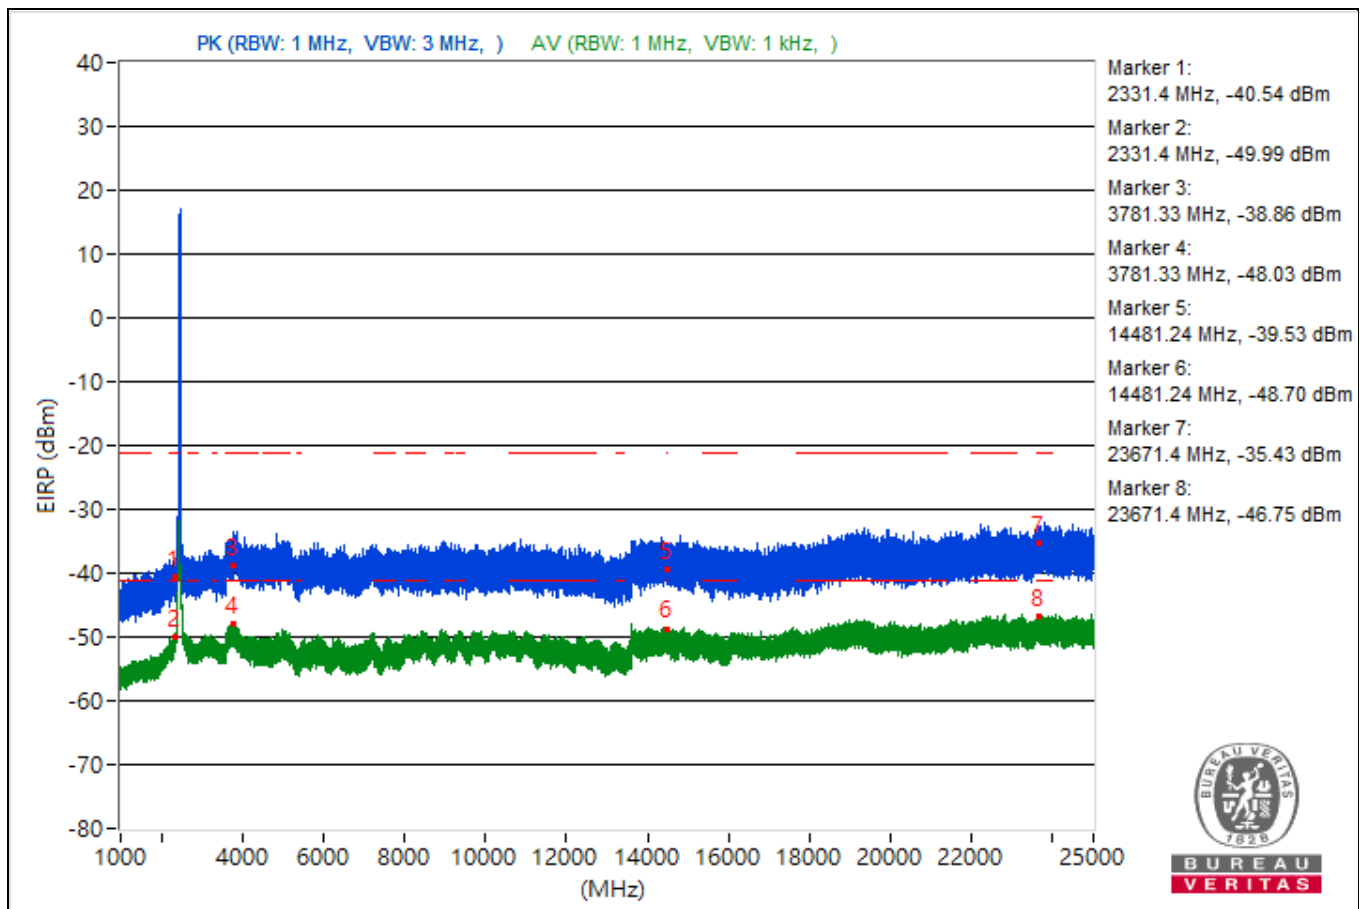

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2283.33	58.34 PK	74	-15.66	-44.87	-44.84	4.92	-36.92
2	2283.33	50.86 AV	54	-3.14	-52.49	-52.17	4.92	-44.4
3	3779.86	57.56 PK	74	-16.44	-44.91	-46.49	4.92	-37.7
4	3779.86	47.64 AV	54	-6.36	-57.2	-54.36	4.92	-47.62
5	8443.02	56.57 PK	74	-17.43	-46.92	-46.33	4.92	-38.69
6	8443.02	46.49 AV	54	-7.51	-55.39	-58.6	4.92	-48.77
7	23683	58.95 PK	74	-15.05	-44.29	-44.19	4.92	-36.31
8	23683	49.01 AV	54	-4.99	-55.44	-53.21	4.92	-46.25


Note: Margin value = Emission Level - Limit value

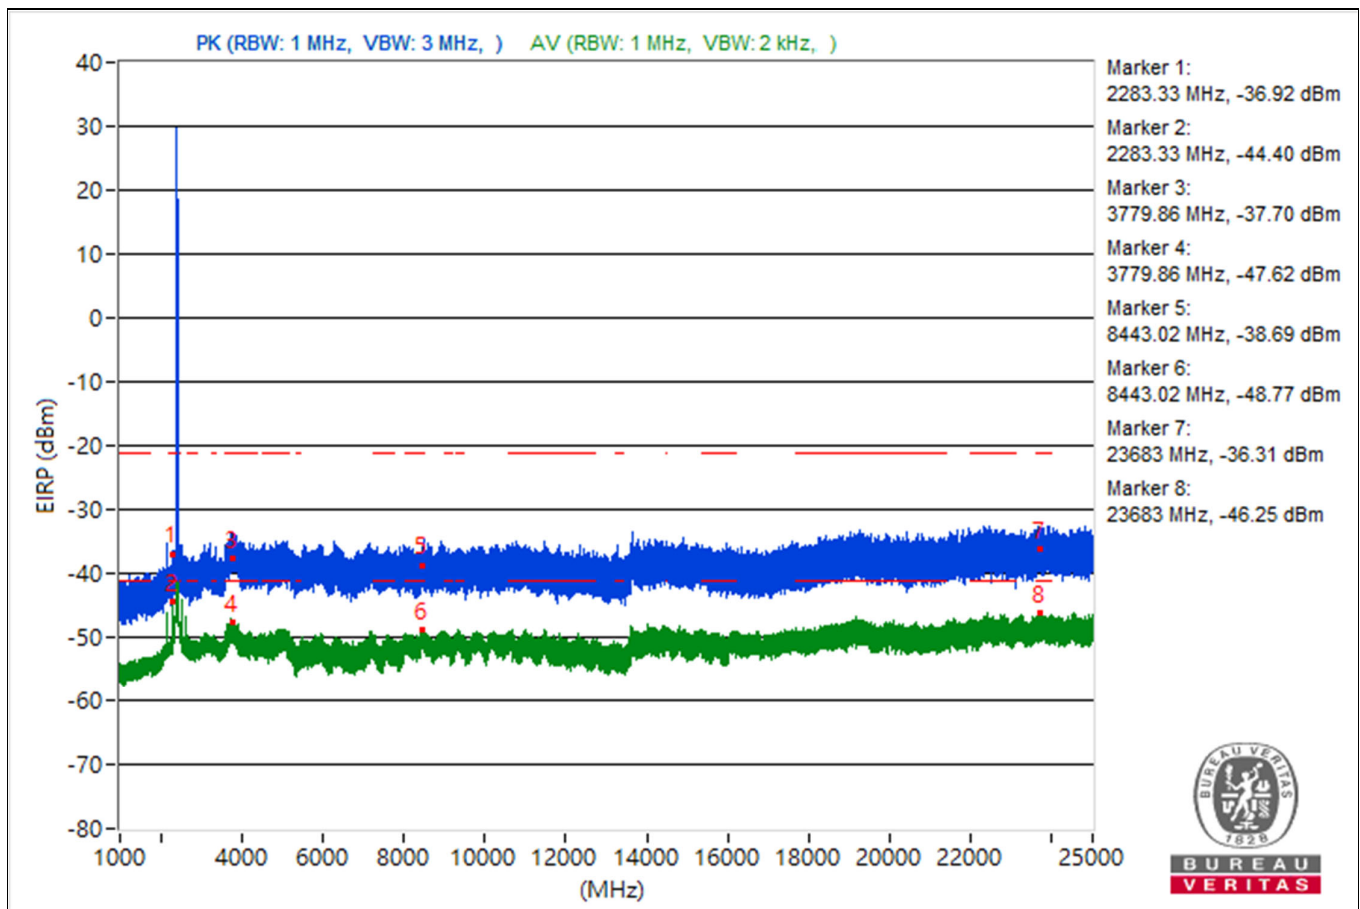

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2310.01	54.79 PK	74	-19.21	-48.21	-48.6	4.92	-40.47
2	2310.01	46.96 AV	54	-7.04	-56.03	-56.43	4.92	-48.3
3	3757.61	60.06 PK	74	-13.94	-43.27	-43	4.92	-35.2
4	3757.61	47.91 AV	54	-6.09	-55.9	-54.74	4.92	-47.35
5	9367.11	54.91 PK	74	-19.09	-48.58	-48.01	4.92	-40.35
6	9367.11	46.55 AV	54	-7.45	-58.36	-55.41	4.92	-48.71
7	23609.1	59.35 PK	74	-14.65	-44.16	-43.53	4.92	-35.91
8	23609.1	48.69 AV	54	-5.31	-53.27	-56.24	4.92	-46.57


Note: Margin value = Emission Level - Limit value

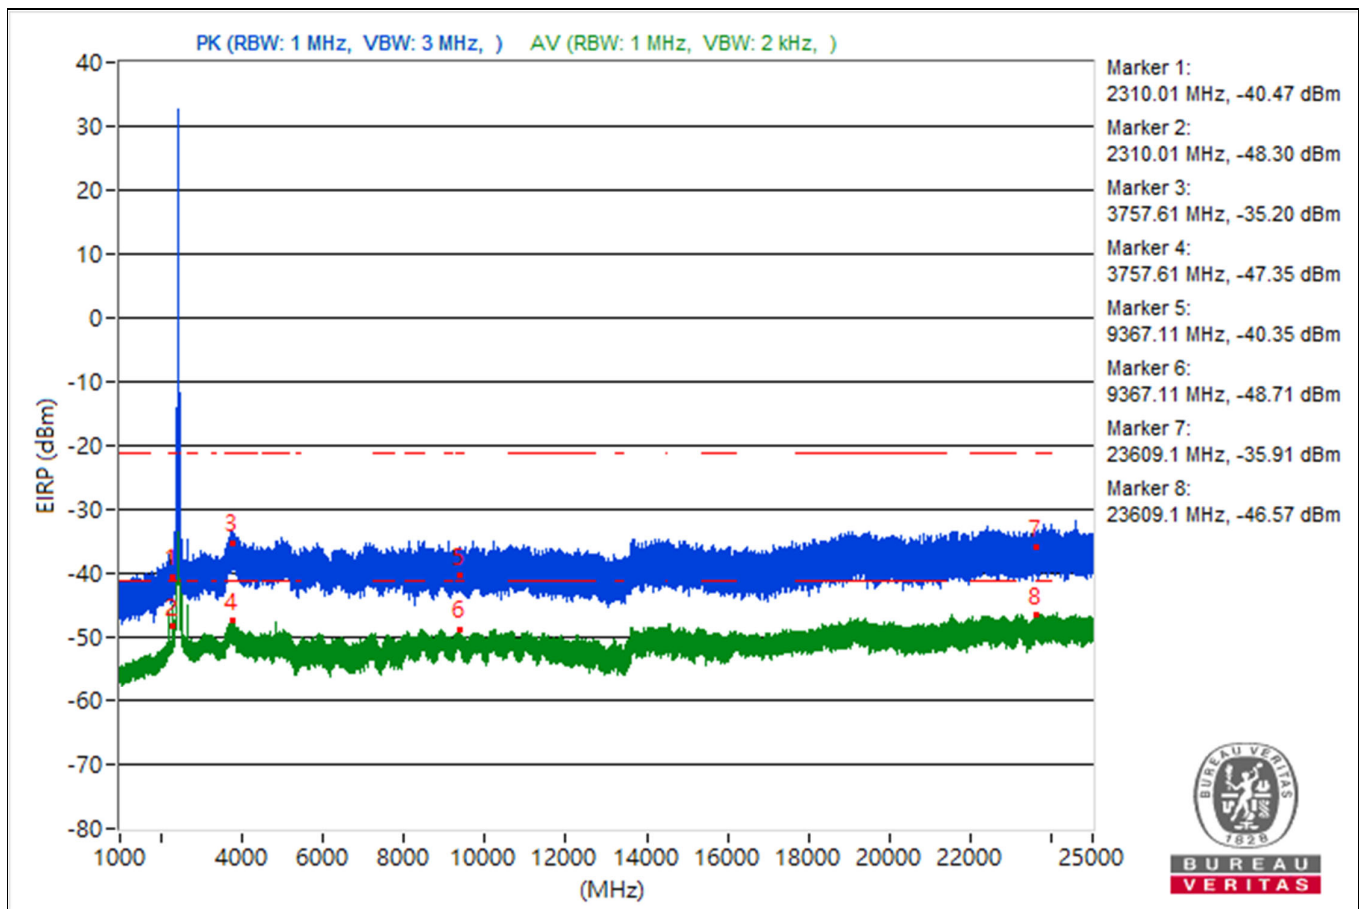

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2230.44	60.15 PK	74	-13.85	-42.99	-43.08	4.92	-35.11
2	2230.44	50.08 AV	54	-3.92	-53.32	-52.91	4.92	-45.18
3	2710.72	56.3 PK	74	-17.7	-47.34	-46.49	4.92	-38.96
4	2710.72	49.48 AV	54	-4.52	-53.87	-53.56	4.92	-45.78
5	14488	56.36 PK	74	-17.64	-49.1	-45.35	4.92	-38.9
6	14488	47.54 AV	54	-6.46	-56.94	-54.65	4.92	-47.72
7	22359.9	58.89 PK	74	-15.11	-44.04	-44.58	4.92	-36.37
8	22359.9	49.02 AV	54	-4.98	-53.61	-54.81	4.92	-46.24


Note: Margin value = Emission Level - Limit value

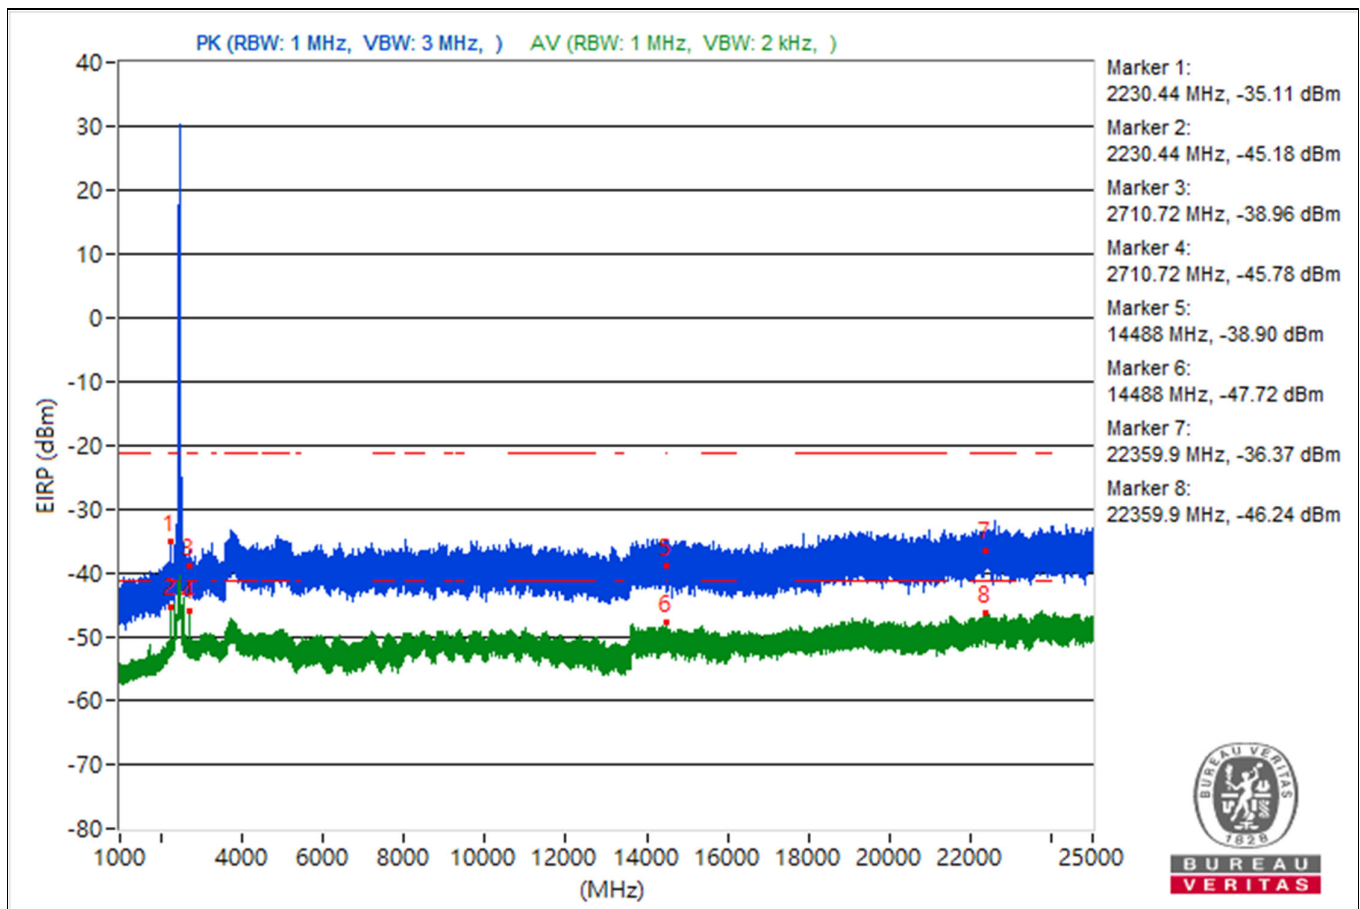

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2235.66	56.55 PK	74	-17.45	-47.3	-46.06	4.92	-38.71
2	2235.66	50.46 AV	54	-3.54	-52.63	-52.83	4.92	-44.8
3	2715.31	57.16 PK	74	-16.84	-46.29	-45.79	4.92	-38.1
4	2715.31	49.12 AV	54	-4.88	-54.02	-54.11	4.92	-46.14
5	15365.42	57.86 PK	74	-16.14	-45.16	-45.51	4.92	-37.4
6	15365.42	46.76 AV	54	-7.24	-57.23	-55.75	4.92	-48.5
7	22412.5	55.86 PK	74	-18.14	-47.43	-47.24	4.92	-39.4
8	22412.5	49.04 AV	54	-4.96	-52.88	-55.96	4.92	-46.22


Note: Margin value = Emission Level - Limit value

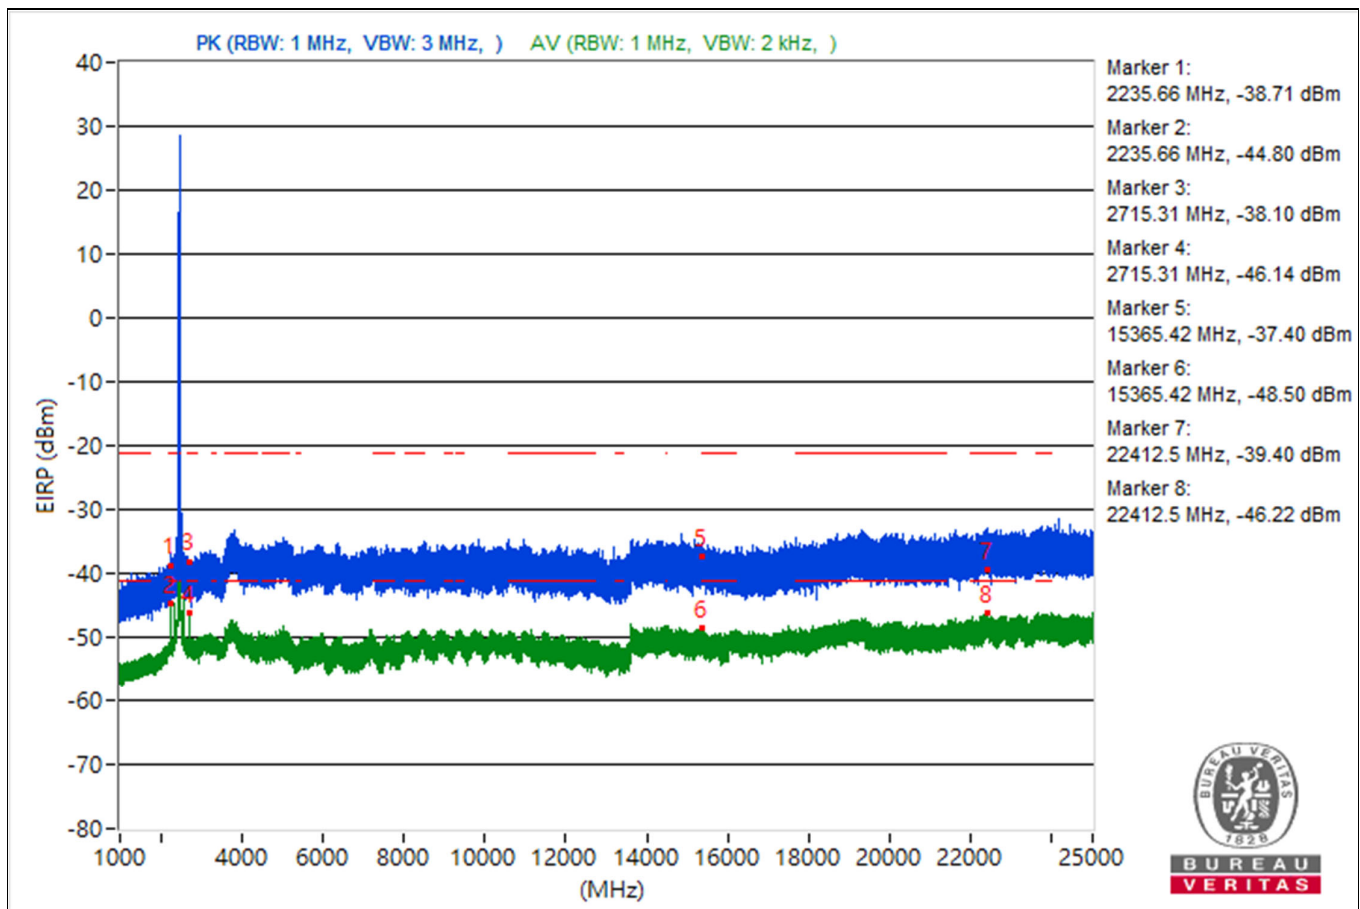

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2240.32	52.32 PK	74	-21.68	-51.31	-50.47	4.92	-42.94
2	2240.32	46.05 AV	54	-7.95	-57.89	-56.5	4.92	-49.21
3	3828.16	57.26 PK	74	-16.74	-46	-45.87	4.92	-38
4	3828.16	47.44 AV	54	-6.56	-54.31	-57.93	4.92	-47.82
5	14480.62	59.36 PK	74	-14.64	-43.06	-44.75	4.92	-35.9
6	14480.62	46.7 AV	54	-7.3	-55.72	-57.43	4.92	-48.56
7	22354	56.86 PK	74	-17.14	-45.22	-47.81	4.92	-38.4
8	22354	49.28 AV	54	-4.72	-53.5	-54.35	4.92	-45.98


Note: Margin value = Emission Level - Limit value

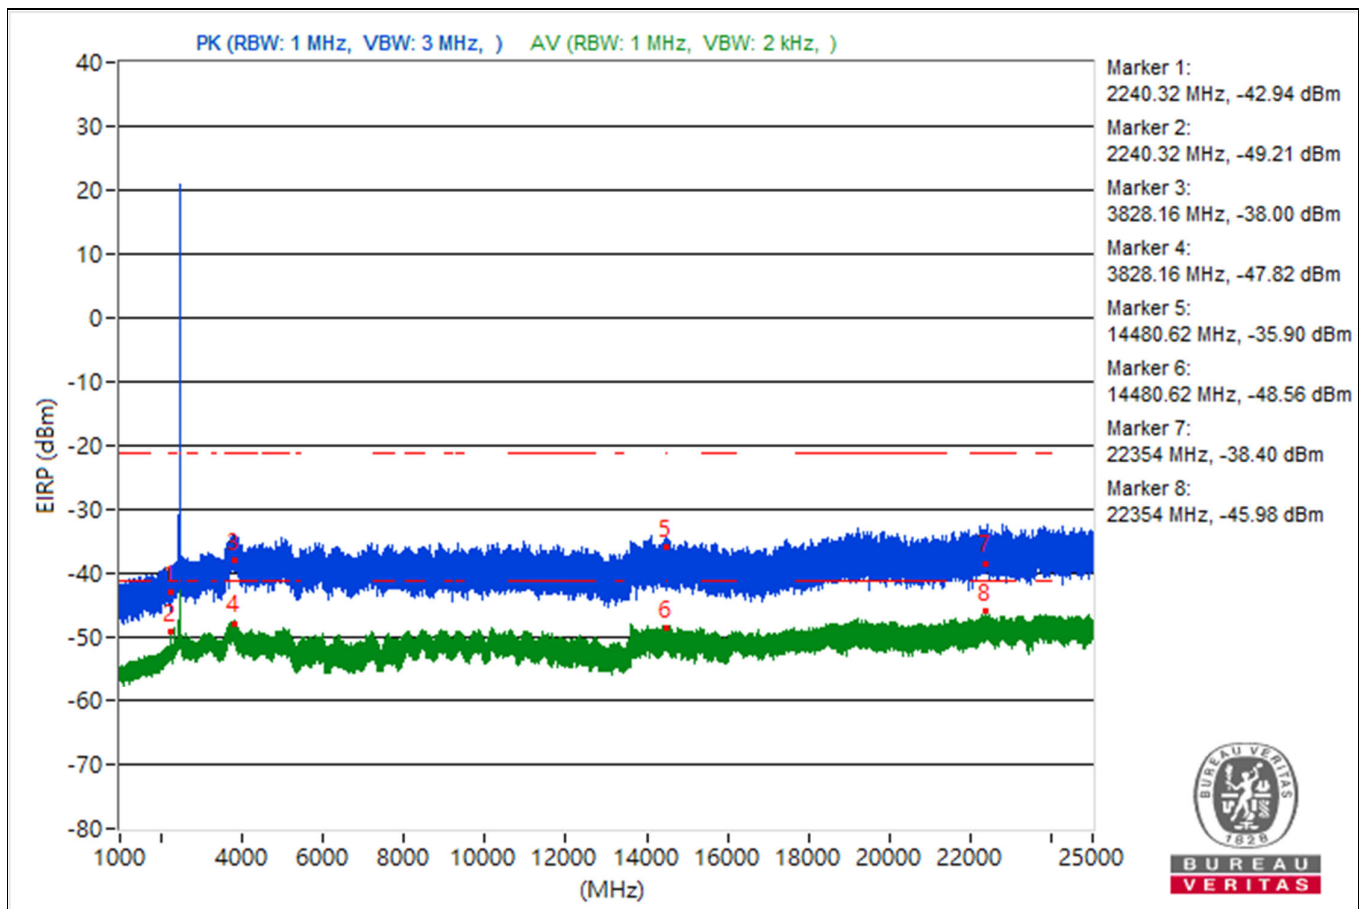

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2285.12	58.23 PK	74	-15.77	-48.19	-43.12	4.92	-37.03
2	2285.12	49.3 AV	54	-4.7	-53.84	-53.95	4.92	-45.96
3	3781.1	59.16 PK	74	-14.84	-44.25	-43.83	4.92	-36.1
4	3781.1	48.54 AV	54	-5.46	-53.14	-56.99	4.92	-46.72
5	14485.24	57.53 PK	74	-16.47	-46.17	-45.2	4.92	-37.73
6	14485.24	47.59 AV	54	-6.41	-56.76	-54.68	4.92	-47.67
7	23682.6	62.57 PK	74	-11.43	-45.64	-38.35	4.92	-32.69
8	23682.6	50.04 AV	54	-3.96	-52.03	-54.65	4.92	-45.22


Note: Margin value = Emission Level - Limit value

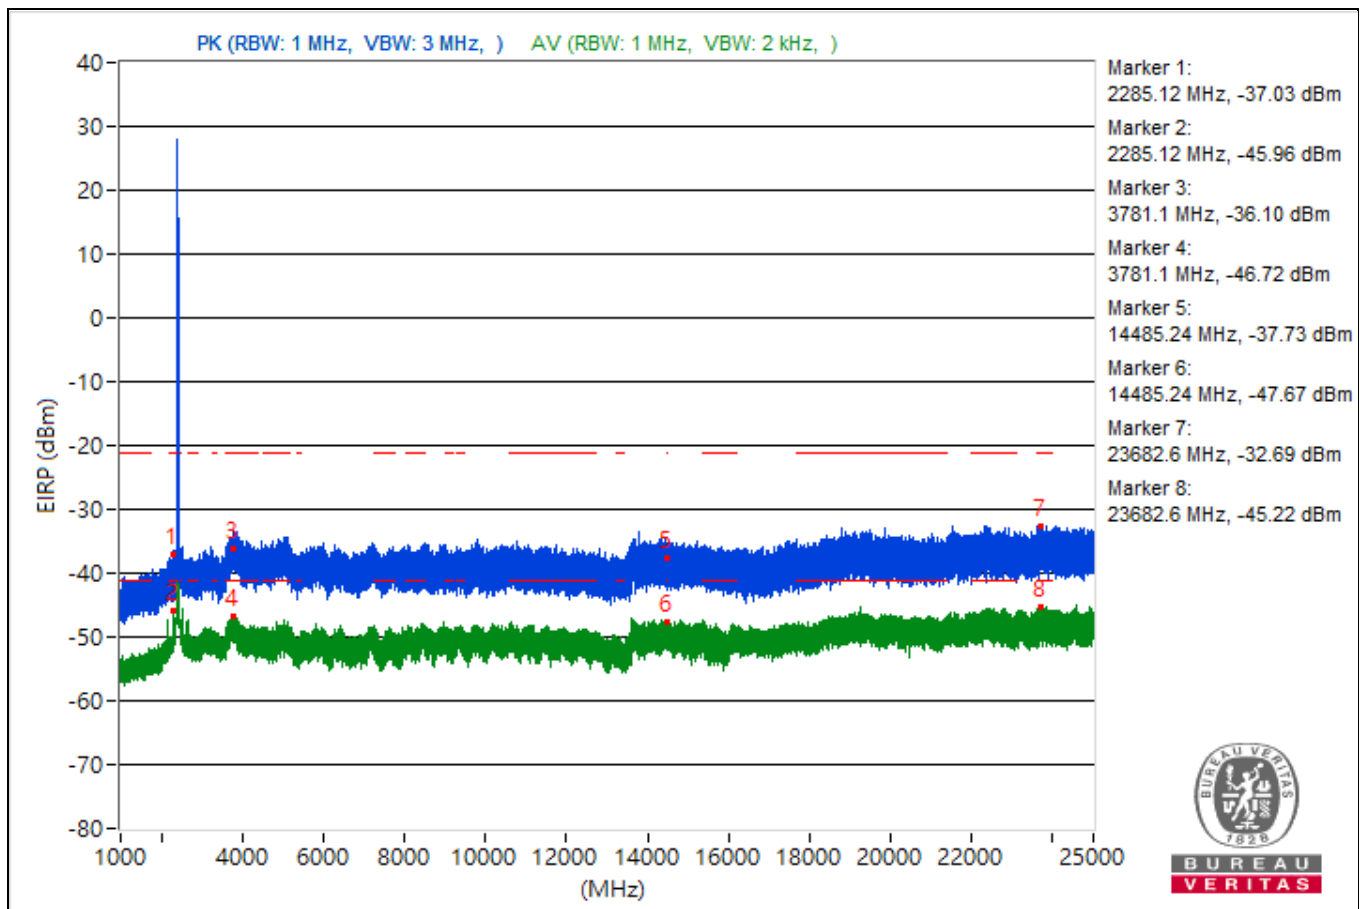

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2310.48	55.09 PK	74	-18.91	-46.96	-49.64	4.92	-40.17
2	2310.48	48.68 AV	54	-5.32	-54.87	-54.17	4.92	-46.58
3	3777.83	59.45 PK	74	-14.55	-43.09	-44.5	4.92	-35.81
4	3777.83	48.6 AV	54	-5.4	-53.03	-57.05	4.92	-46.66
5	14498.31	57.17 PK	74	-16.83	-45.17	-47.09	4.92	-38.09
6	14498.31	47.96 AV	54	-6.04	-55.92	-54.62	4.92	-47.3
7	22395.1	59.13 PK	74	-14.87	-44.39	-43.75	4.92	-36.13
8	22395.1	49.51 AV	54	-4.49	-52.37	-55.56	4.92	-45.75


Note: Margin value = Emission Level - Limit value

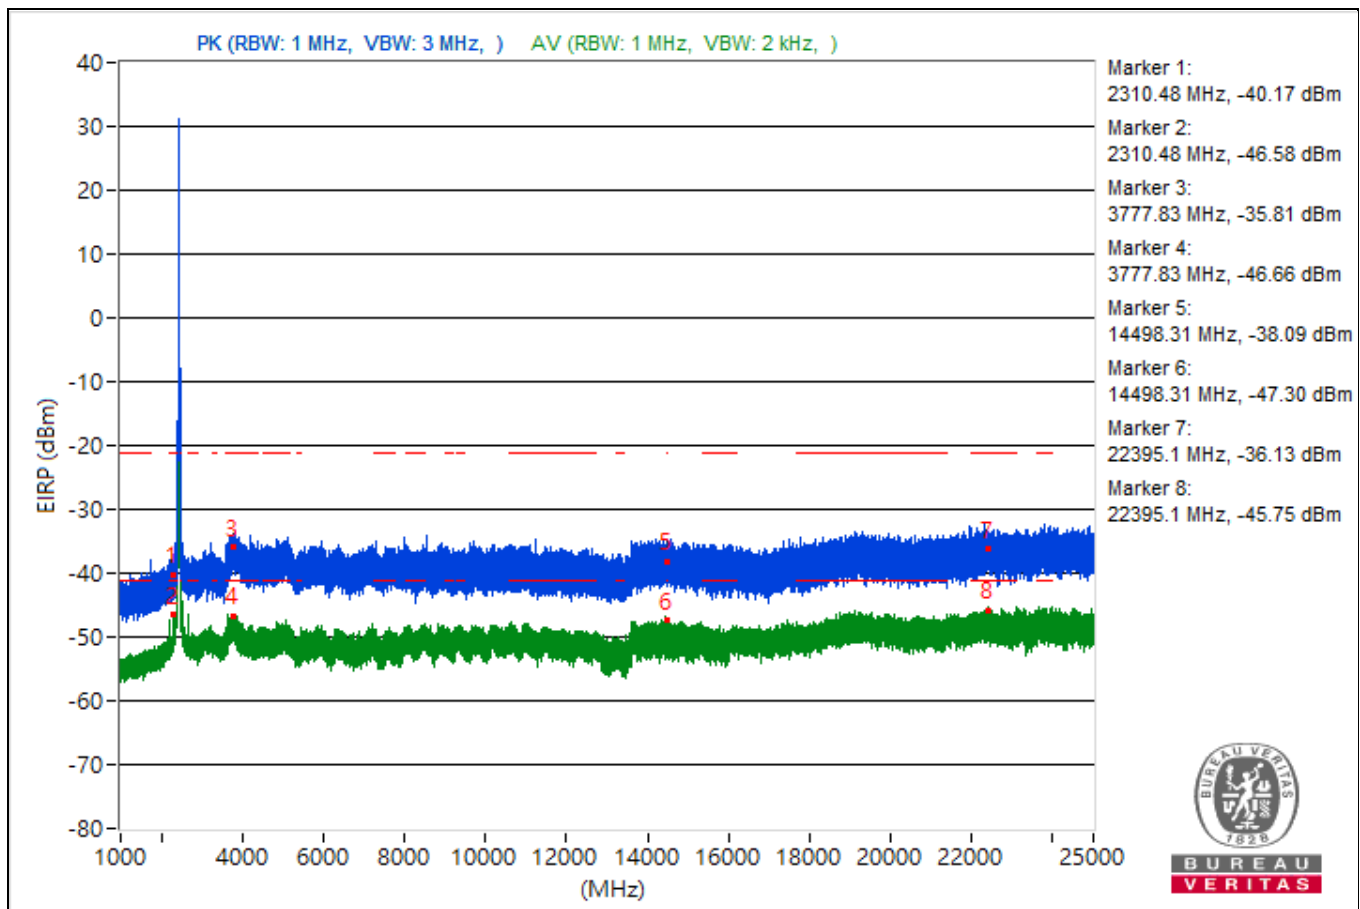

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2229.36	55.5 PK	74	-18.5	-47.07	-48.43	4.92	-39.76
2	2229.36	48.66 AV	54	-5.34	-54.54	-54.52	4.92	-46.6
3	3784.68	58.85 PK	74	-15.15	-45.05	-43.72	4.92	-36.41
4	3784.68	48.61 AV	54	-5.39	-56.14	-53.44	4.92	-46.65
5	14486.13	55.64 PK	74	-18.36	-47.13	-48.01	4.92	-39.62
6	14486.13	47.73 AV	54	-6.27	-55.98	-55.01	4.92	-47.53
7	22784.7	58.45 PK	74	-15.55	-44.8	-44.69	4.92	-36.81
8	22784.7	49.67 AV	54	-4.33	-52.38	-55.06	4.92	-45.59


Note: Margin value = Emission Level - Limit value

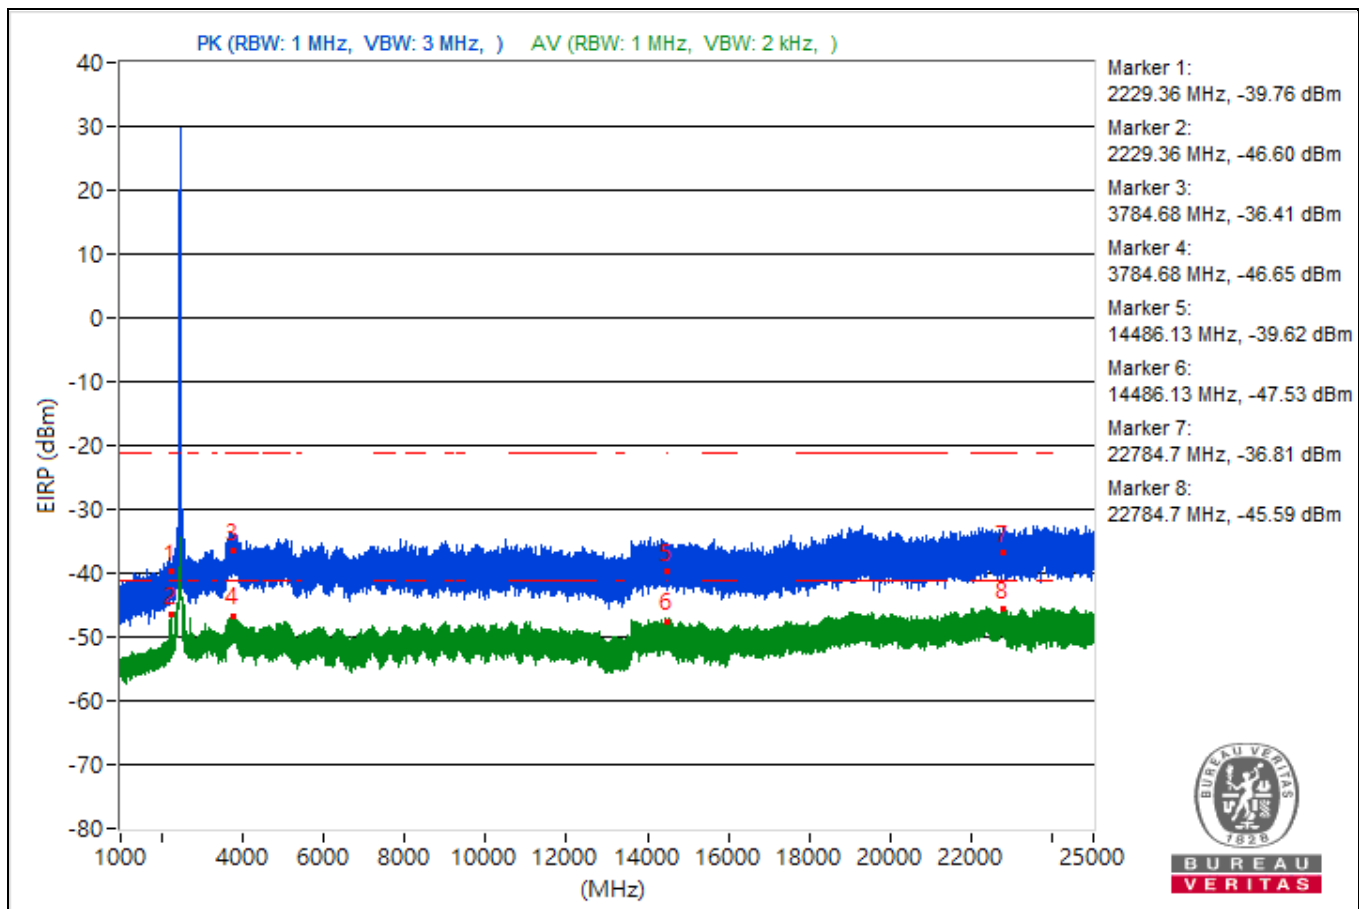

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2234.8	55.52 PK	74	-18.48	-47.59	-47.74	4.92	-39.74
2	2234.8	48.54 AV	54	-5.46	-54.83	-54.47	4.92	-46.72
3	3794.01	58.72 PK	74	-15.28	-45.87	-43.42	4.92	-36.54
4	3794.01	48.8 AV	54	-5.2	-55.61	-53.44	4.92	-46.46
5	14489.96	57.9 PK	74	-16.1	-44.58	-46.14	4.92	-37.36
6	14489.96	47.58 AV	54	-6.42	-56.52	-54.87	4.92	-47.68
7	23683.7	60.25 PK	74	-13.75	-43.68	-42.32	4.92	-35.01
8	23683.7	50.13 AV	54	-3.87	-54.54	-51.95	4.92	-45.13


Note: Margin value = Emission Level - Limit value

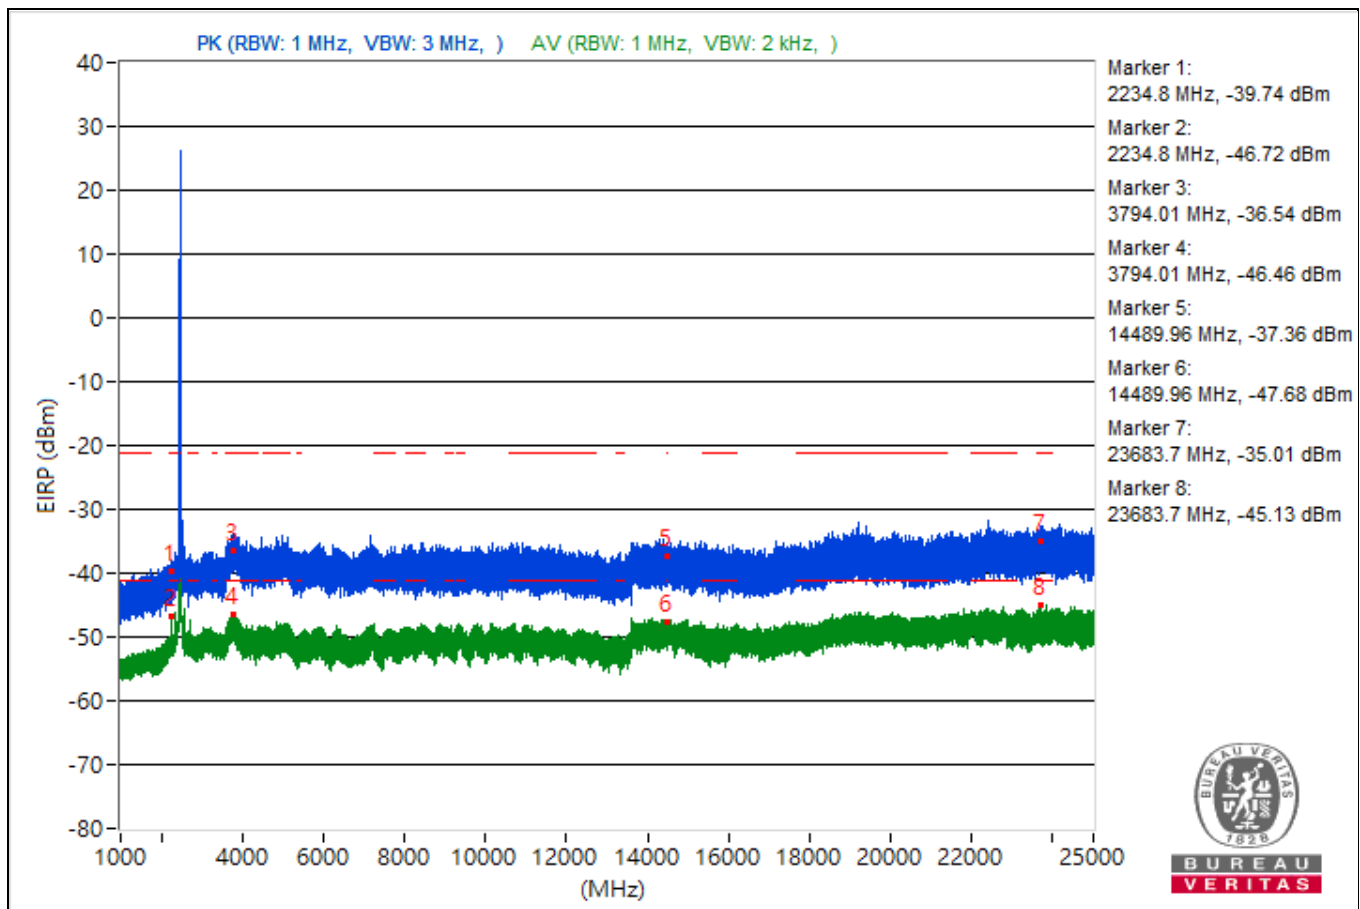

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2239.62	53.73 PK	74	-20.27	-50.54	-48.59	4.92	-41.53
2	2239.62	45.2 AV	54	-8.8	-57.13	-59.05	4.92	-50.06
3	3774.33	57.73 PK	74	-16.27	-45.7	-45.23	4.92	-37.53
4	3774.33	48.81 AV	54	-5.19	-53.69	-55.21	4.92	-46.45
5	14496.71	57.53 PK	74	-16.47	-46.68	-44.83	4.92	-37.73
6	14496.71	46.72 AV	54	-7.28	-54.61	-59.8	4.92	-48.54
7	23816.6	58.49 PK	74	-15.51	-45.3	-44.18	4.92	-36.77
8	23816.6	50.06 AV	54	-3.94	-52.06	-54.54	4.92	-45.2


Note: Margin value = Emission Level - Limit value

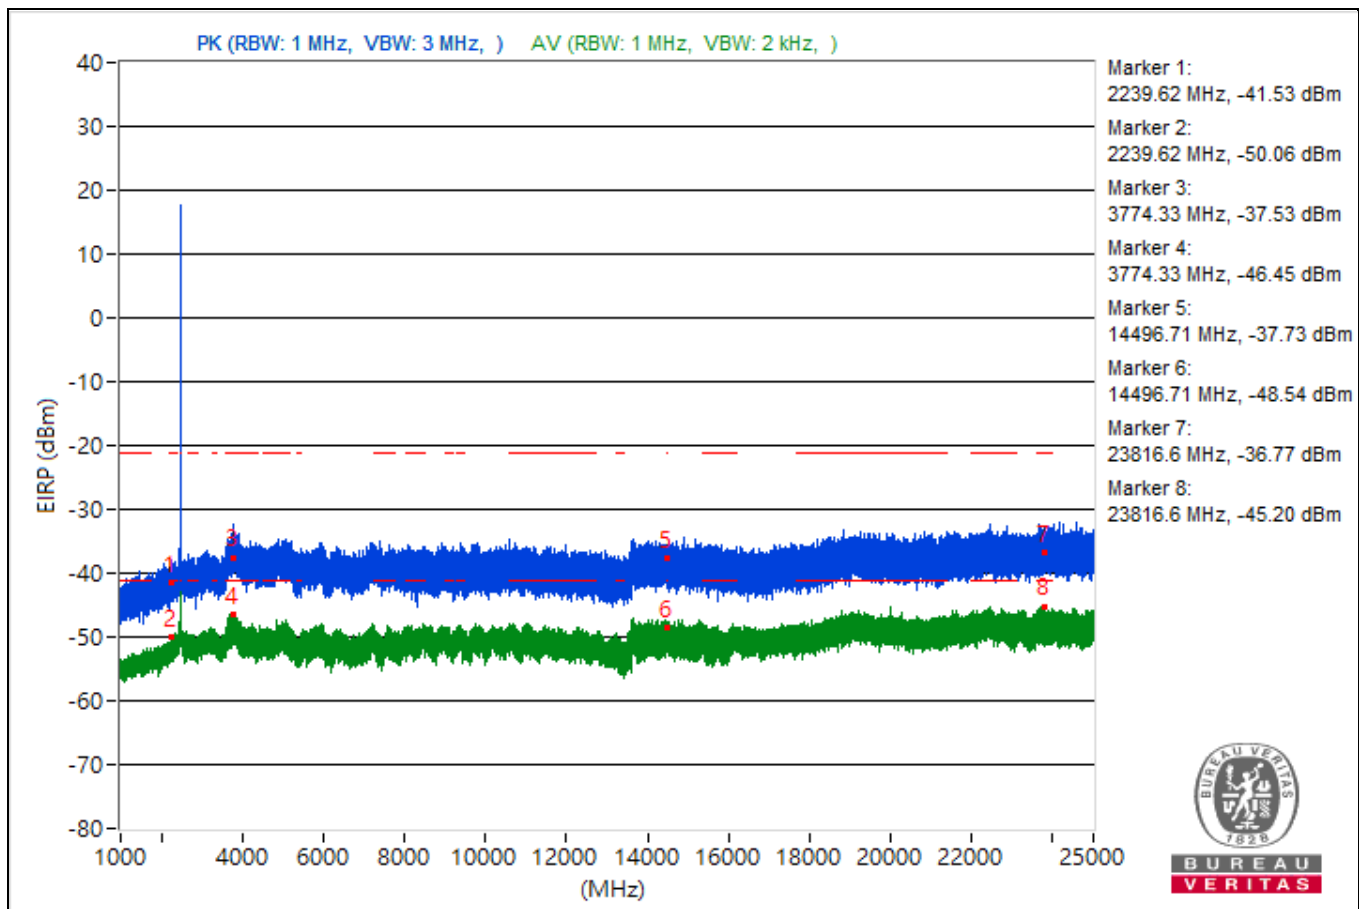

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2283.88	56.03 PK	74	-17.97	-47.31	-47.01	4.92	-39.23
2	2283.88	48.16 AV	54	-5.84	-55.42	-54.67	4.92	-47.1
3	3817.97	58.66 PK	74	-15.34	-45.64	-43.65	4.92	-36.6
4	3817.97	48.96 AV	54	-5.04	-53.71	-54.83	4.92	-46.3
5	14491.38	57.03 PK	74	-16.97	-45.93	-46.41	4.92	-38.23
6	14491.38	47.44 AV	54	-6.56	-57.83	-54.34	4.92	-47.82
7	22409.5	57.06 PK	74	-16.94	-45.78	-46.52	4.92	-38.2
8	22409.5	49.8 AV	54	-4.2	-54.97	-52.23	4.92	-45.46


Note: Margin value = Emission Level - Limit value

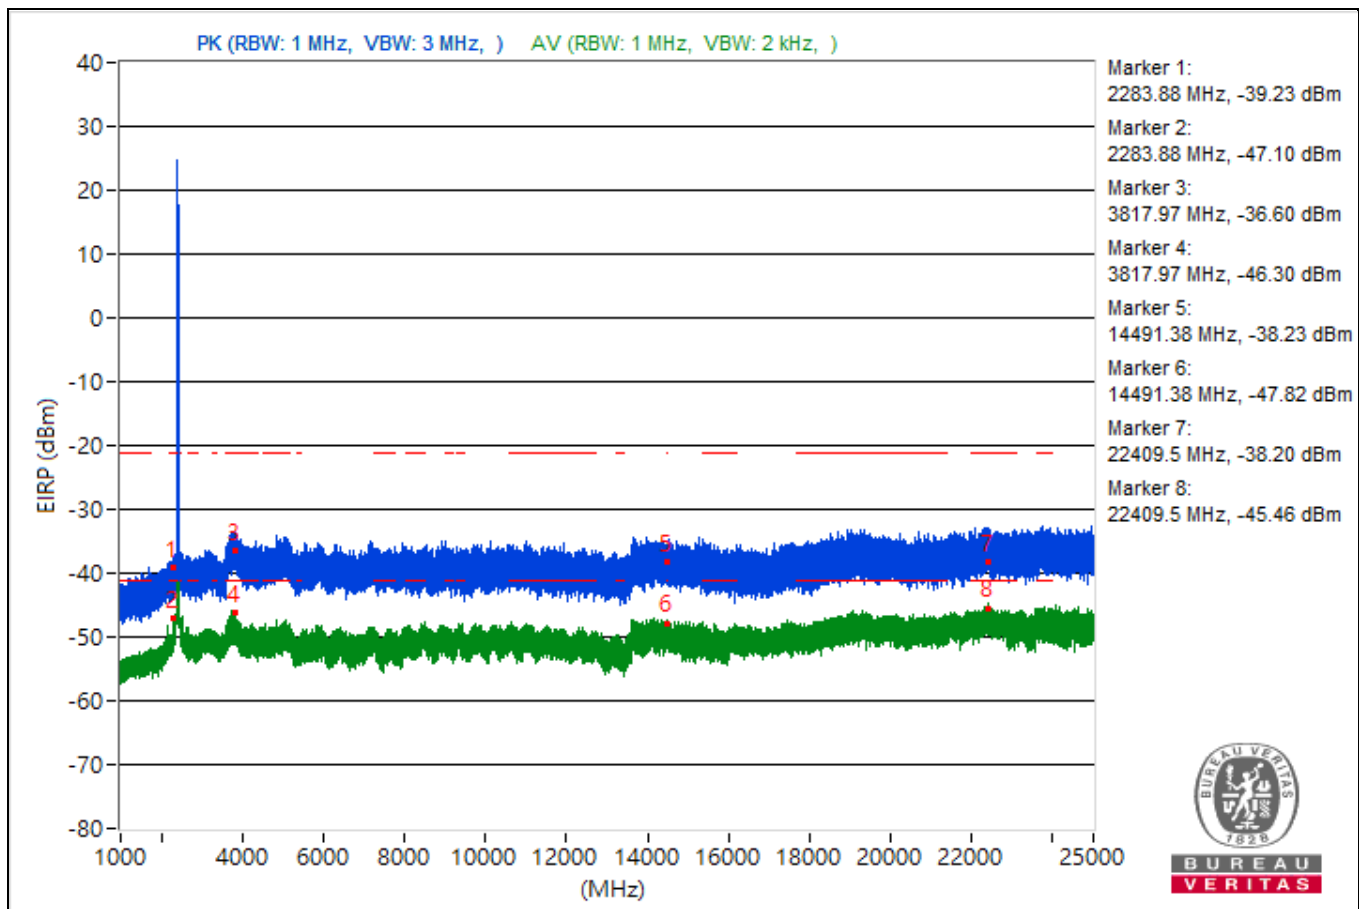

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2314.83	54.94 PK	74	-19.06	-47.67	-48.91	4.92	-40.32
2	2314.83	47.47 AV	54	-6.53	-55.45	-56.01	4.92	-47.79
3	3802.96	57.5 PK	74	-16.5	-44.93	-46.61	4.92	-37.76
4	3802.96	48.32 AV	54	-5.68	-53.87	-56.18	4.92	-46.94
5	14471.73	57.45 PK	74	-16.55	-45.65	-45.84	4.92	-37.81
6	14471.73	47.27 AV	54	-6.73	-57.19	-54.94	4.92	-47.99
7	23614.8	60 PK	74	-14	-44.14	-42.41	4.92	-35.26
8	23614.8	49.57 AV	54	-4.43	-56.01	-52.08	4.92	-45.69


Note: Margin value = Emission Level - Limit value

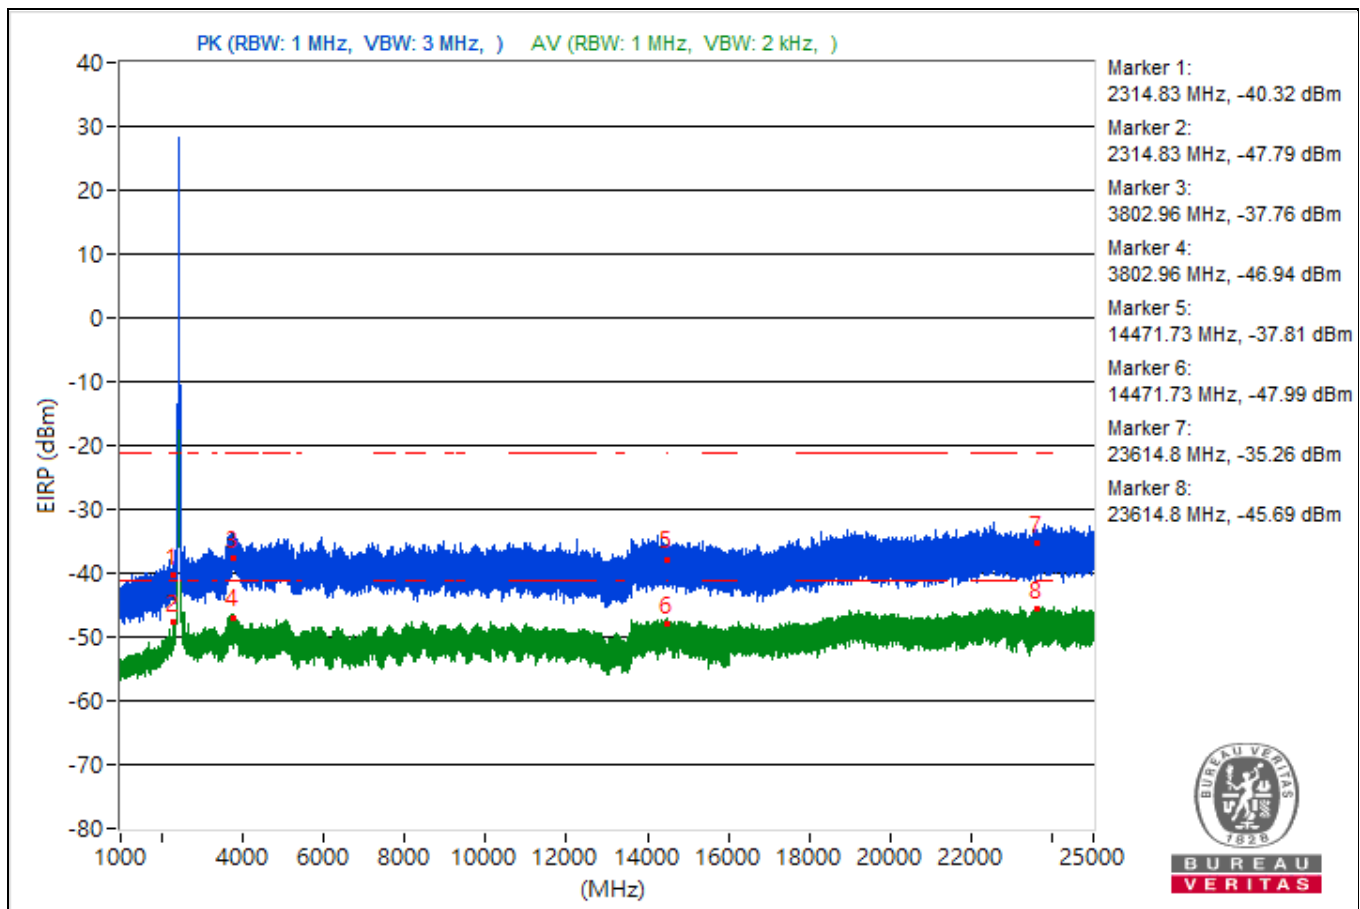

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2230.21	56.18 PK	74	-17.82	-45.75	-48.78	4.92	-39.08
2	2230.21	47.29 AV	54	-6.71	-55.59	-56.24	4.92	-47.97
3	3800.93	59.42 PK	74	-14.58	-42.69	-45.23	4.92	-35.84
4	3800.93	48.97 AV	54	-5.03	-52.54	-56.98	4.92	-46.29
5	15422.84	55.38 PK	74	-18.62	-46.8	-49.12	4.92	-39.88
6	15422.84	46.8 AV	54	-7.2	-58.48	-54.99	4.92	-48.46
7	23725.7	59.58 PK	74	-14.42	-44.56	-42.83	4.92	-35.68
8	23725.7	49.82 AV	54	-4.18	-52.22	-54.94	4.92	-45.44


Note: Margin value = Emission Level - Limit value

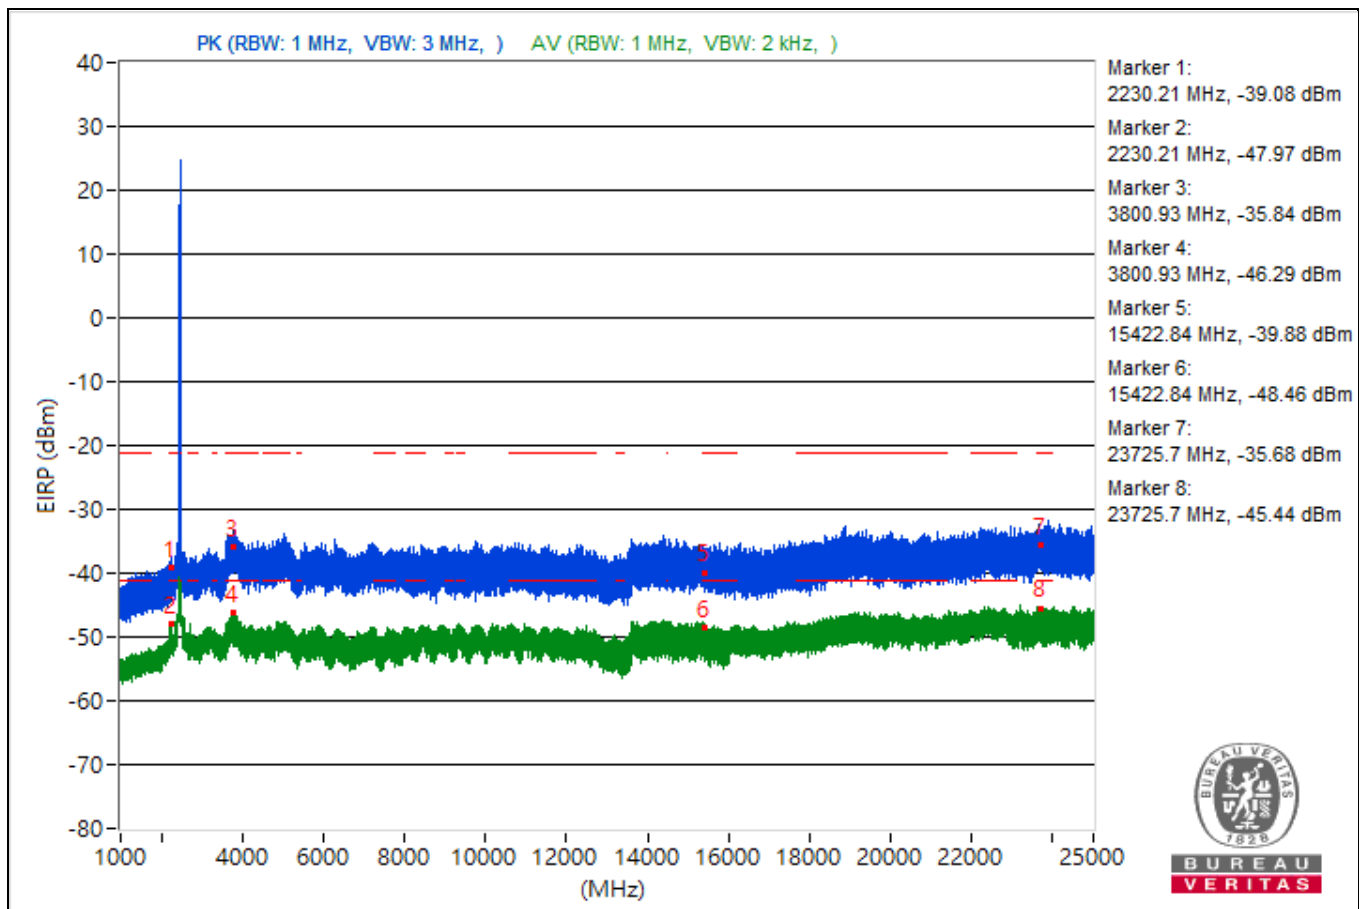

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2235.81	54.93 PK	74	-19.07	-48.83	-47.75	4.92	-40.33
2	2235.81	47.31 AV	54	-6.69	-55.9	-55.86	4.92	-47.95
3	3737	59.65 PK	74	-14.35	-42.9	-44.3	4.92	-35.61
4	3737	48.61 AV	54	-5.39	-56.51	-53.25	4.92	-46.65
5	15355.91	55.09 PK	74	-18.91	-48.87	-47.45	4.92	-40.17
6	15355.91	47.23 AV	54	-6.77	-57.74	-54.7	4.92	-48.03
7	22321.2	58.5 PK	74	-15.5	-44.3	-45.13	4.92	-36.76
8	22321.2	49.22 AV	54	-4.78	-57.11	-52.16	4.92	-46.04


Note: Margin value = Emission Level - Limit value

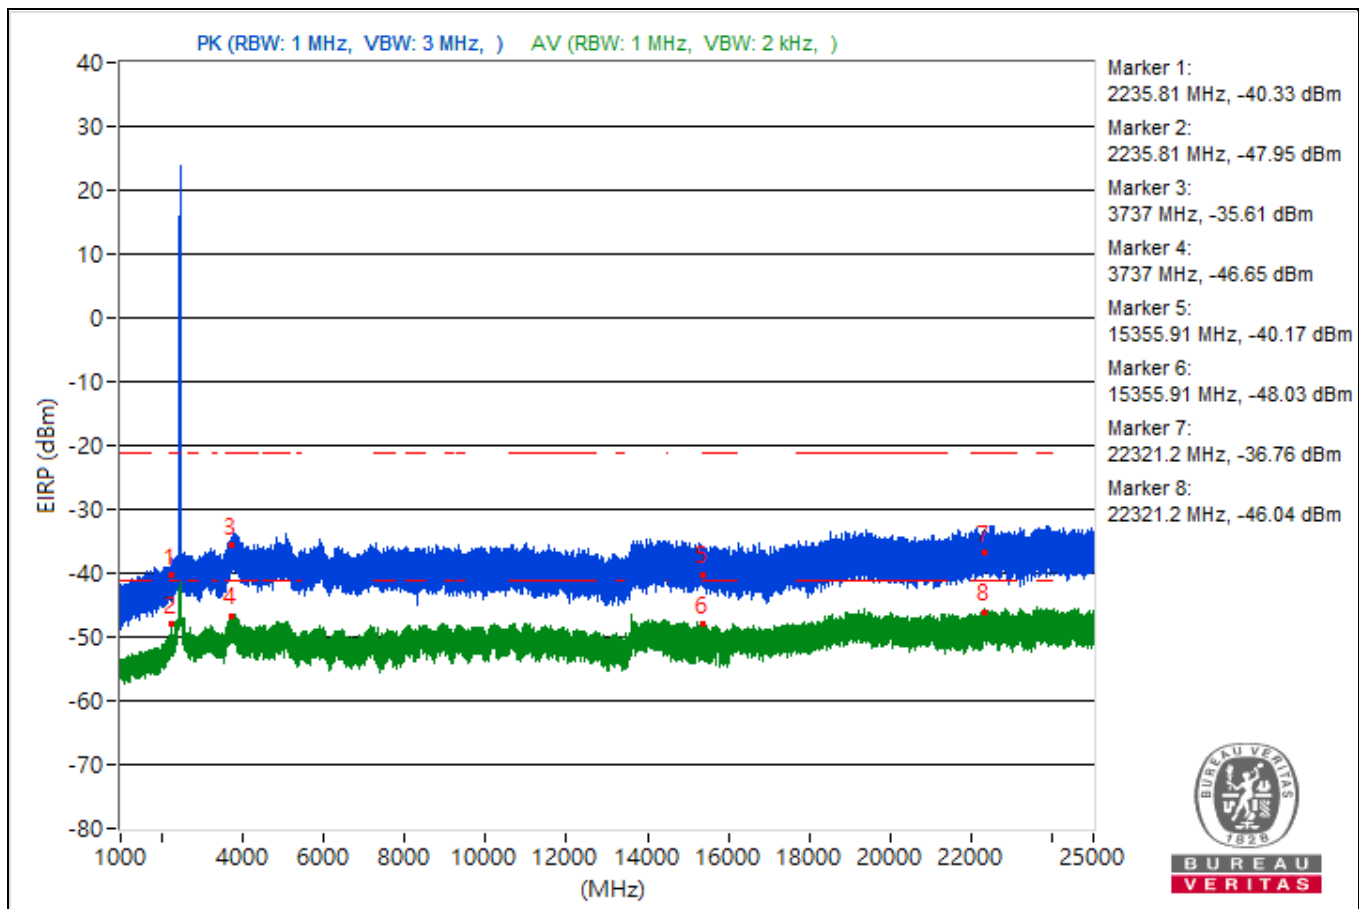

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2237.83	54.86 PK	74	-19.14	-49.58	-47.37	4.92	-40.4
2	2237.83	45.56 AV	54	-8.44	-57.11	-58.22	4.92	-49.7
3	3783.04	57.14 PK	74	-16.86	-45.94	-46.18	4.92	-38.12
4	3783.04	49.18 AV	54	-4.82	-54.99	-53.21	4.92	-46.08
5	15361.16	57.93 PK	74	-16.07	-45.37	-45.16	4.92	-37.33
6	15361.16	47.01 AV	54	-6.99	-58.22	-54.8	4.92	-48.25
7	22445.6	58.39 PK	74	-15.61	-44.54	-45.08	4.92	-36.87
8	22445.6	49.86 AV	54	-4.14	-52	-55.26	4.92	-45.4


Note: Margin value = Emission Level - Limit value

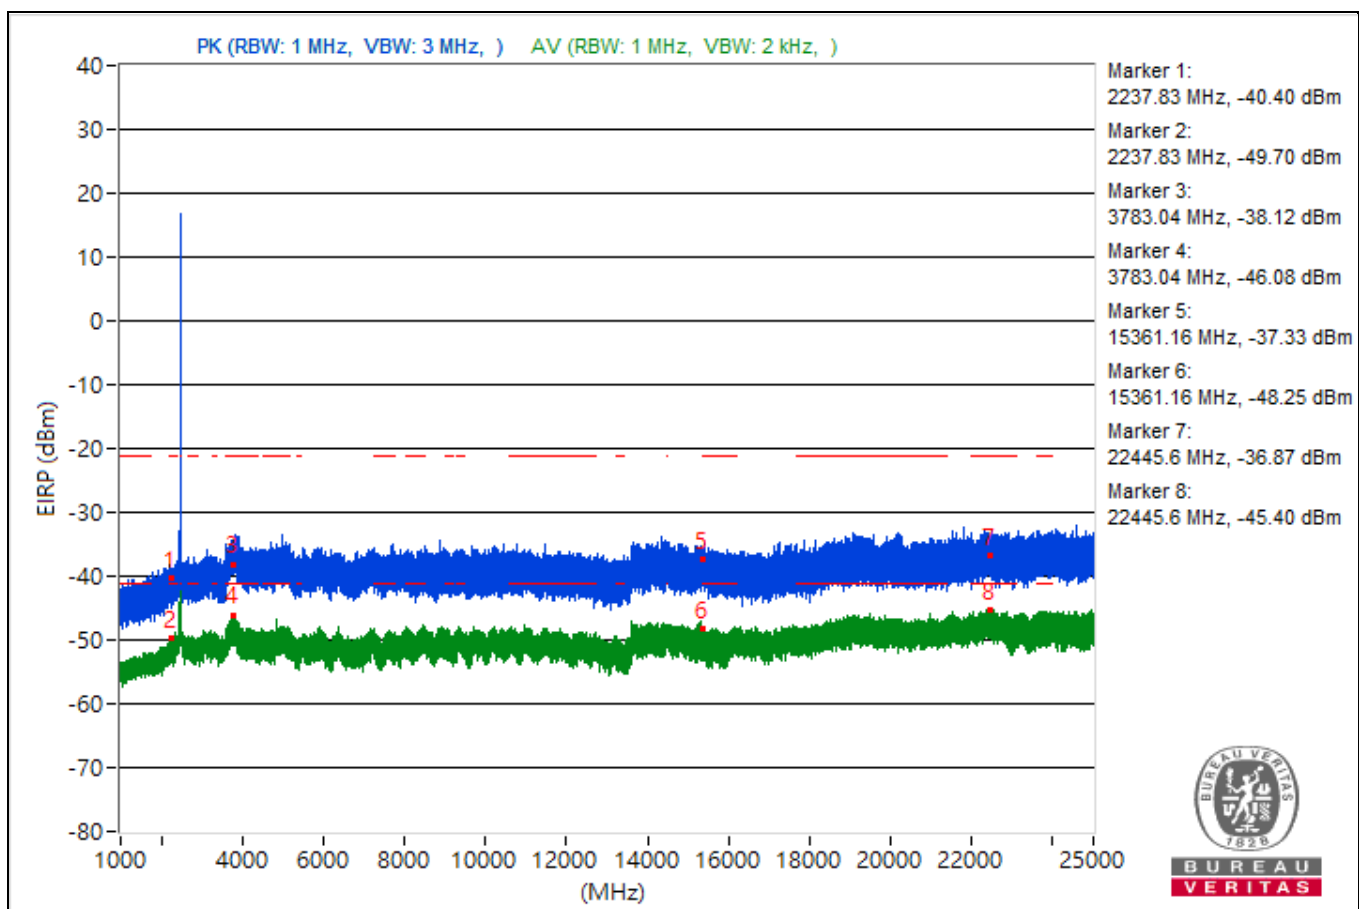

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2287.84	56.03 PK	74	-17.97	-47.86	-46.56	4.92	-39.23
2	2287.84	48.54 AV	54	-5.46	-54.7	-54.61	4.92	-46.72
3	3800	57.32 PK	74	-16.68	-45.3	-46.54	4.92	-37.94
4	3800	48.5 AV	54	-5.5	-53.53	-56.28	4.92	-46.76
5	15367.56	57.74 PK	74	-16.26	-44.87	-46.11	4.92	-37.52
6	15367.56	47.38 AV	54	-6.62	-57.79	-54.45	4.92	-47.88
7	23644.8	58.54 PK	74	-15.46	-43.49	-46.23	4.92	-36.72
8	23644.8	50.01 AV	54	-3.99	-54.52	-52.15	4.92	-45.25


Note: Margin value = Emission Level - Limit value

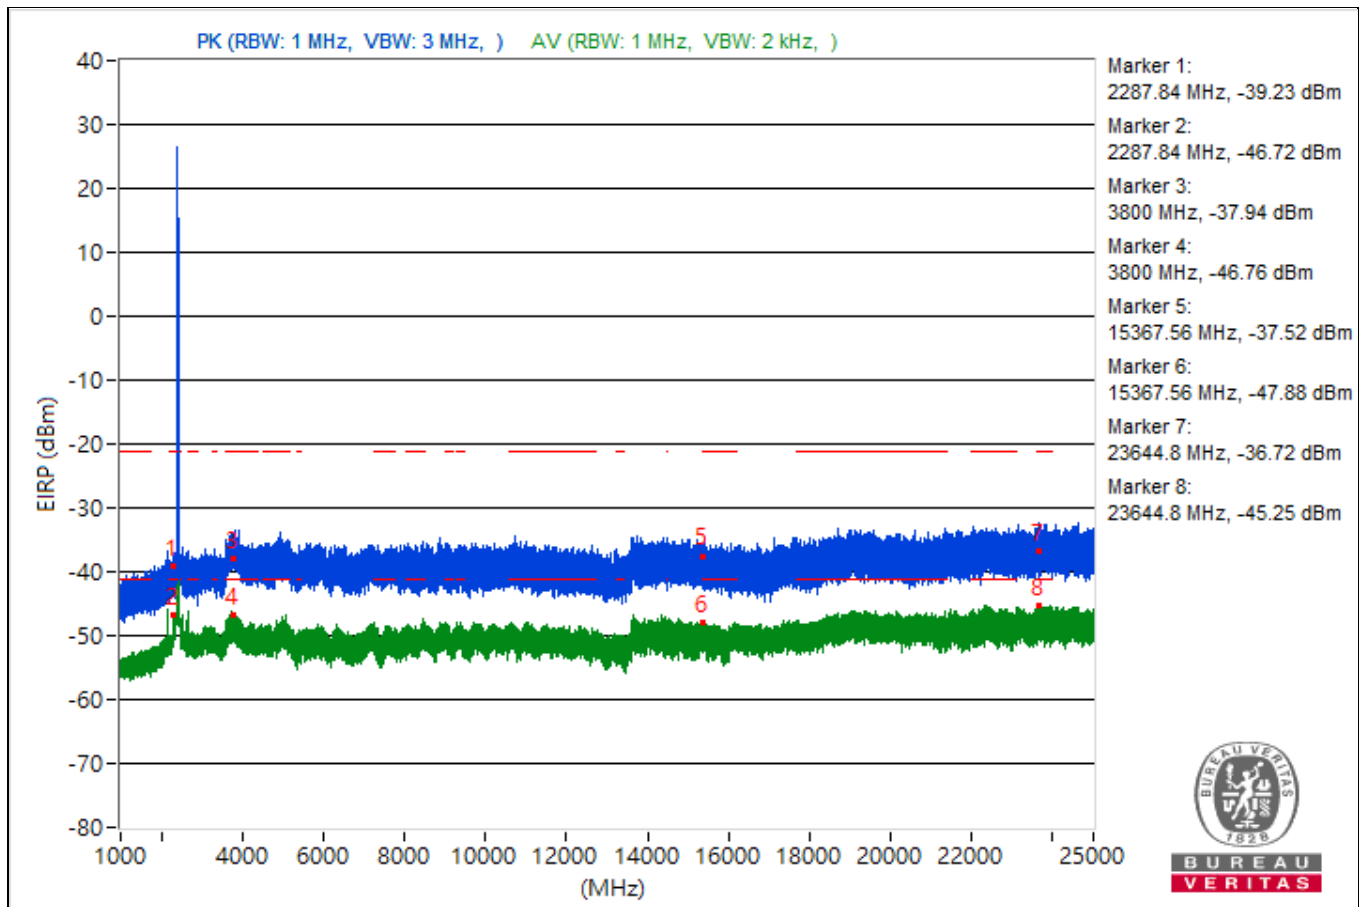

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2312.19	55.97 PK	74	-18.03	-47.13	-47.32	4.92	-39.29
2	2312.19	47.95 AV	54	-6.05	-55.12	-55.36	4.92	-47.31
3	3769.59	58.05 PK	74	-15.95	-44.99	-45.29	4.92	-37.21
4	3769.59	49.6 AV	54	-4.4	-52.7	-54.72	4.92	-45.66
5	14473.78	55.87 PK	74	-18.13	-45.59	-50.23	4.92	-39.39
6	14473.78	47.65 AV	54	-6.35	-56.37	-54.85	4.92	-47.61
7	23633.2	60.59 PK	74	-13.41	-41.54	-44	4.92	-34.67
8	23633.2	50.09 AV	54	-3.91	-52.09	-54.43	4.92	-45.17


Note: Margin value = Emission Level - Limit value

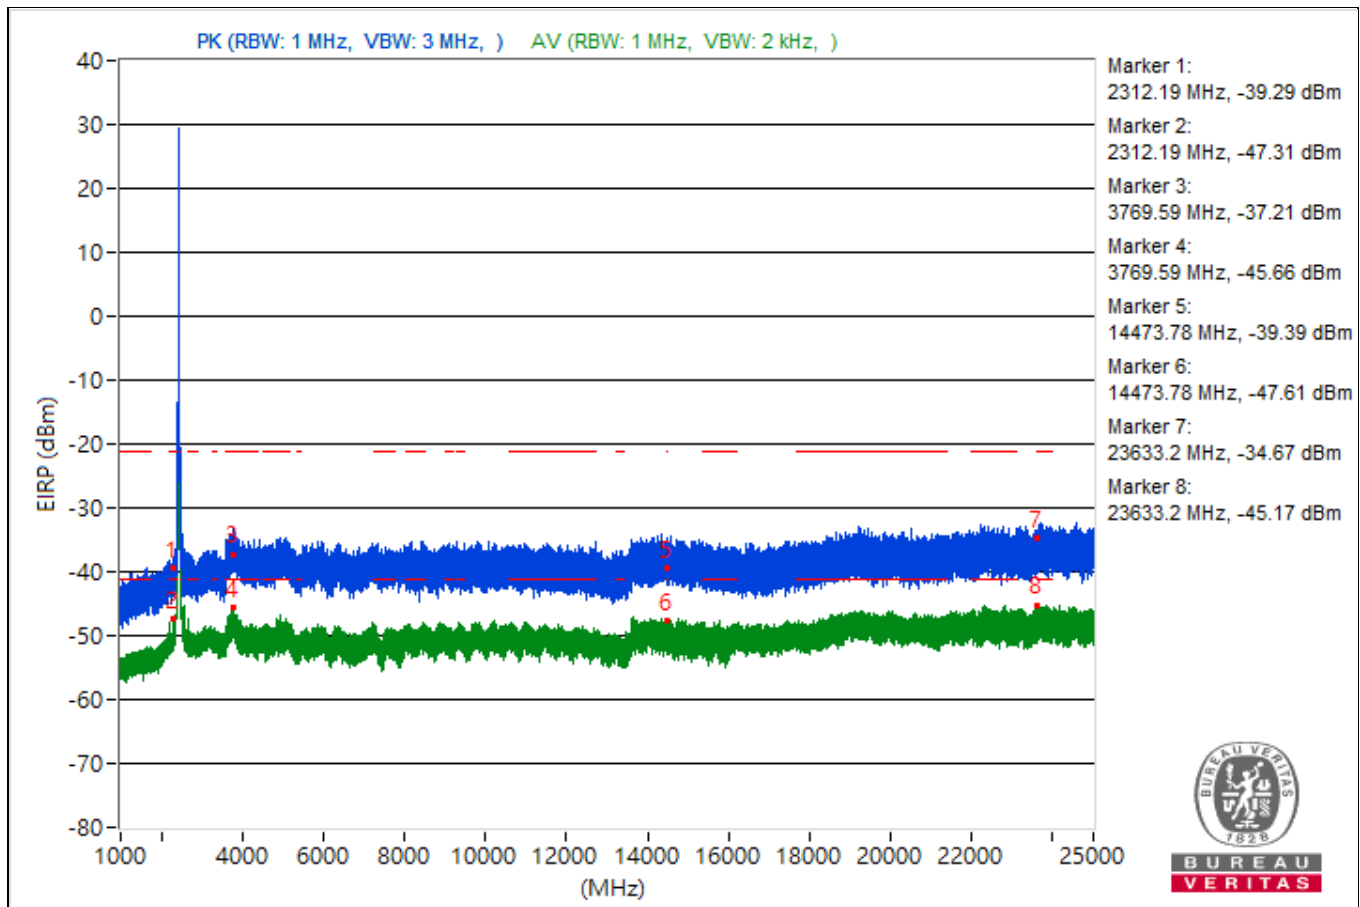

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2224.3	57.85 PK	74	-16.15	-44.65	-46.16	4.92	-37.41
2	2224.3	50.68 AV	54	-3.32	-52.84	-52.2	4.92	-44.58
3	3763.21	58.41 PK	74	-15.59	-44.48	-45.12	4.92	-36.85
4	3763.21	49.24 AV	54	-4.76	-52.42	-56.34	4.92	-46.02
5	14481.87	57.42 PK	74	-16.58	-45.87	-45.67	4.92	-37.84
6	14481.87	47.59 AV	54	-6.41	-57.21	-54.43	4.92	-47.67
7	22515.3	58.96 PK	74	-15.04	-46.75	-42.64	4.92	-36.3
8	22515.3	49.45 AV	54	-4.55	-56	-52.26	4.92	-45.81


Note: Margin value = Emission Level - Limit value

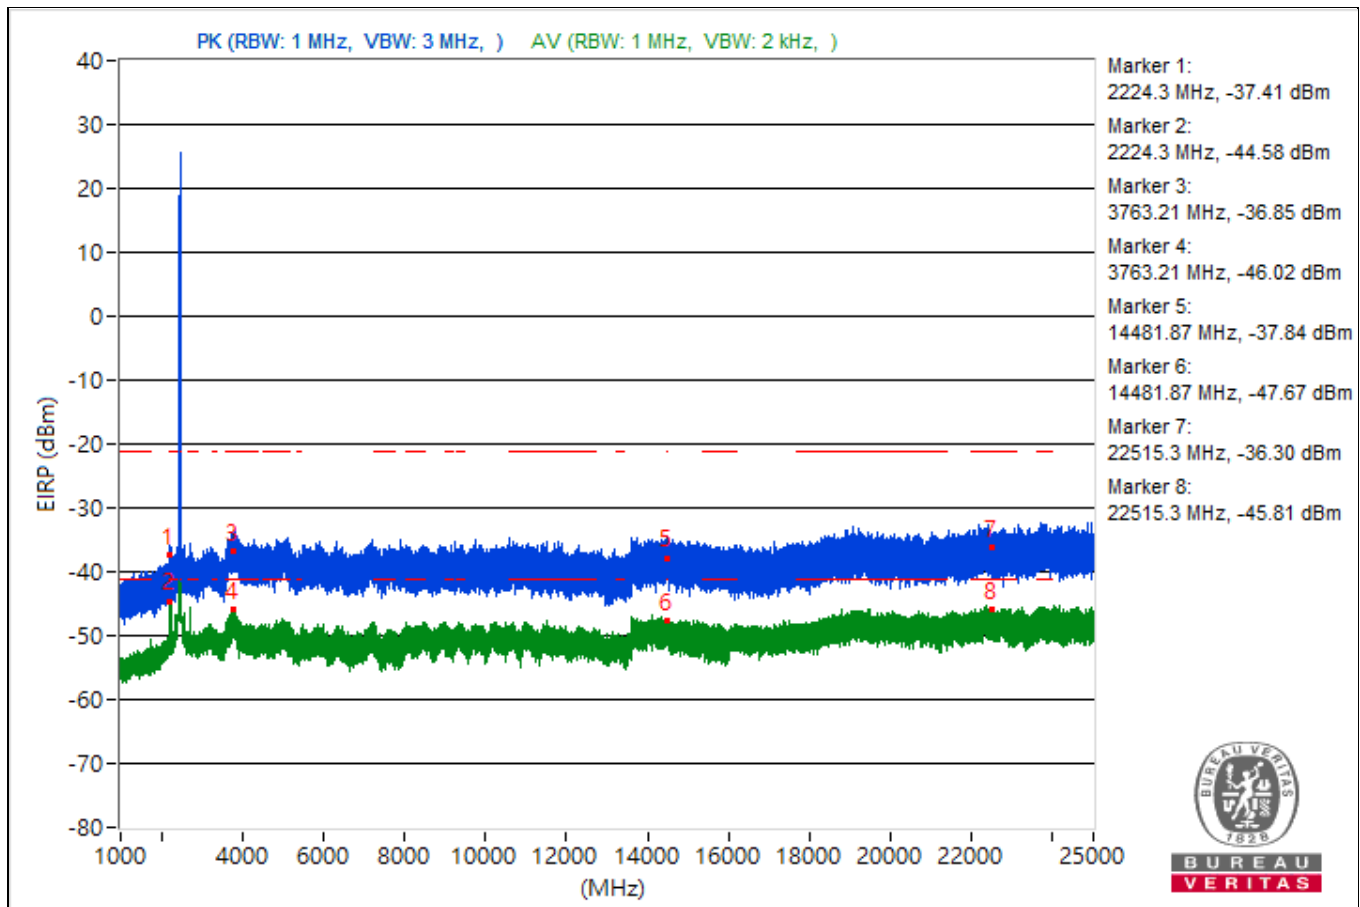

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2230.44	56.62 PK	74	-17.38	-47.17	-46.05	4.92	-38.64
2	2230.44	48.24 AV	54	-5.76	-54.57	-55.36	4.92	-47.02
3	3759.63	60.2 PK	74	-13.8	-42.09	-44.13	4.92	-35.06
4	3759.63	48.64 AV	54	-5.36	-56.05	-53.44	4.92	-46.62
5	15351.02	59.13 PK	74	-14.87	-42.56	-46.37	4.92	-36.13
6	15351.02	47.73 AV	54	-6.27	-54.16	-57.31	4.92	-47.53
7	23711.2	57.27 PK	74	-16.73	-44.87	-47.3	4.92	-37.99
8	23711.2	48.83 AV	54	-5.17	-57.52	-52.55	4.92	-46.43


Note: Margin value = Emission Level - Limit value

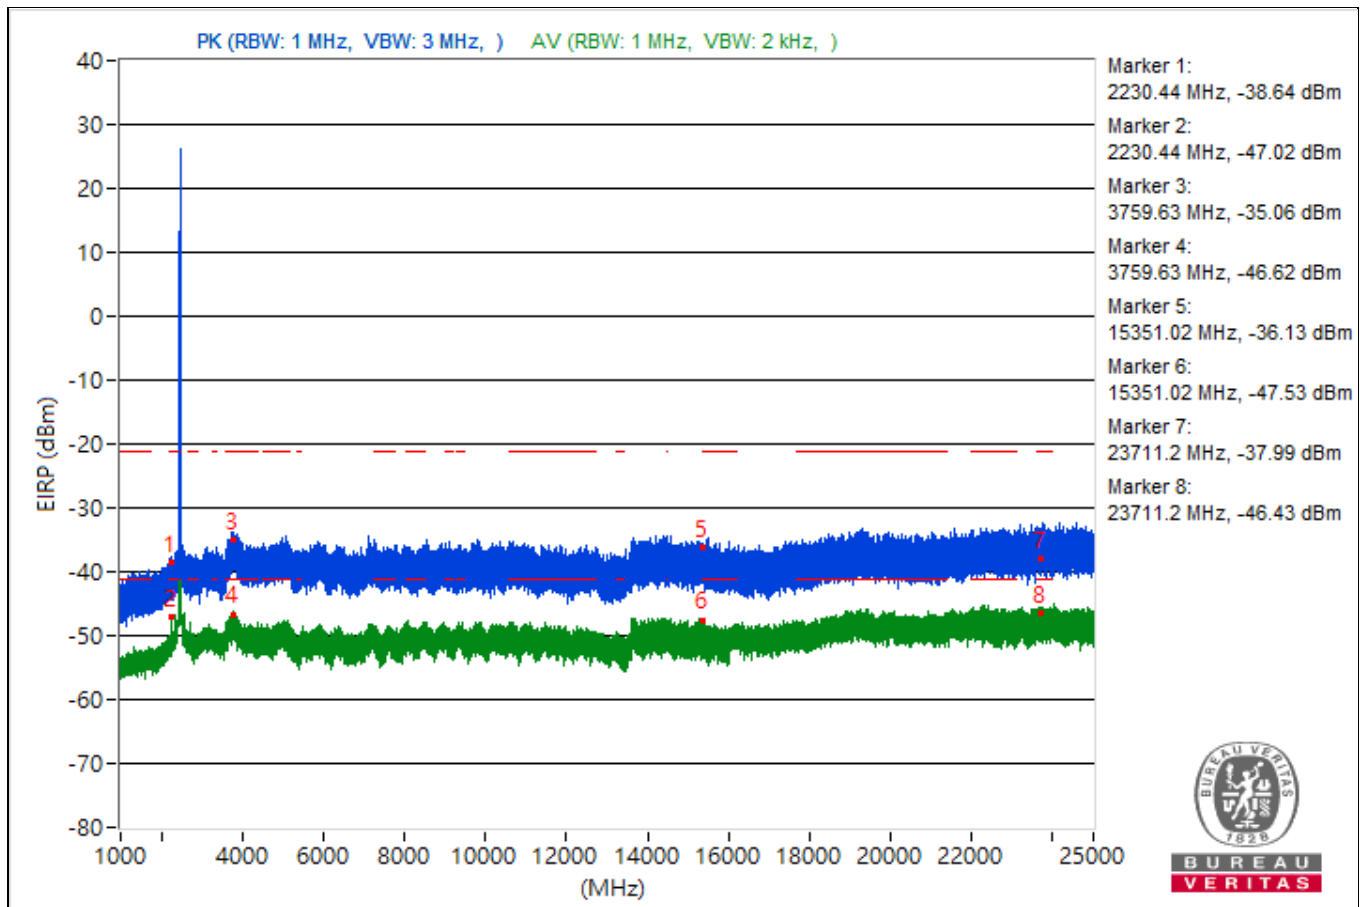

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2239.23	54.56 PK	74	-19.44	-49.22	-48.11	4.92	-40.7
2	2239.23	46.96 AV	54	-7.04	-57.11	-55.5	4.92	-48.3
3	3753.88	58.59 PK	74	-15.41	-44.18	-45.07	4.92	-36.67
4	3753.88	49.09 AV	54	-4.91	-52.92	-55.73	4.92	-46.17
5	14485.69	57.52 PK	74	-16.48	-45.48	-45.87	4.92	-37.74
6	14485.69	47.32 AV	54	-6.68	-57.51	-54.69	4.92	-47.94
7	22427.3	60.89 PK	74	-13.11	-43.88	-41.14	4.92	-34.37
8	22427.3	49.54 AV	54	-4.46	-52.37	-55.49	4.92	-45.72


Note: Margin value = Emission Level - Limit value

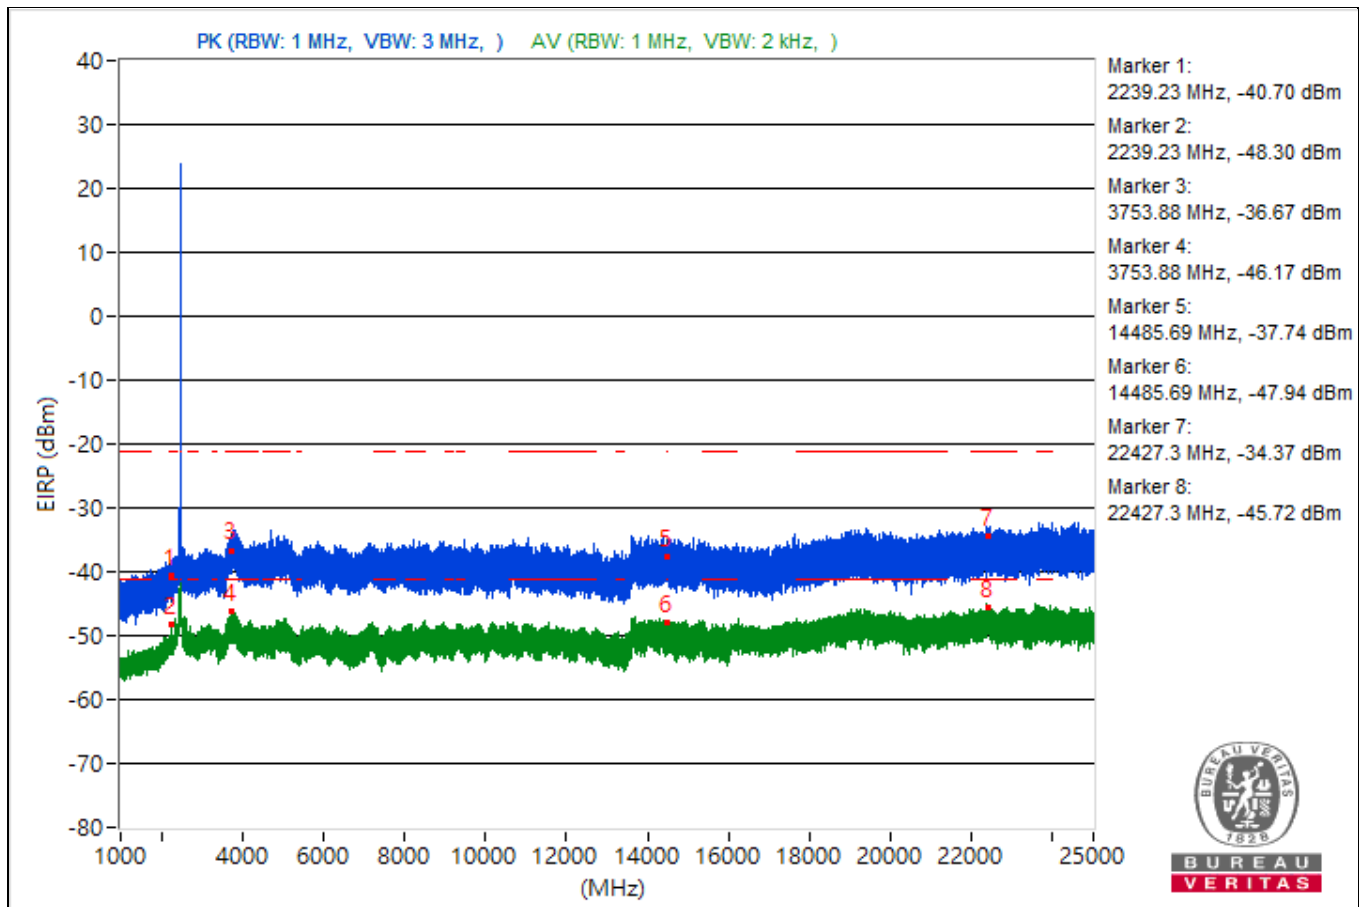

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2290.64	57.12 PK	74	-16.88	-45.73	-46.44	4.92	-38.14
2	2290.64	48.19 AV	54	-5.81	-55.74	-54.36	4.92	-47.07
3	3798.6	58.53 PK	74	-15.47	-44.57	-44.75	4.92	-36.73
4	3798.6	49.16 AV	54	-4.84	-53.05	-55.28	4.92	-46.1
5	14491.29	56.6 PK	74	-17.4	-46.18	-47.05	4.92	-38.66
6	14491.29	47.52 AV	54	-6.48	-54.87	-56.65	4.92	-47.74
7	23975.8	56.99 PK	74	-17.01	-48.96	-44.52	4.92	-38.27
8	23975.8	49.96 AV	54	-4.04	-52.42	-54.23	4.92	-45.3


Note: Margin value = Emission Level - Limit value

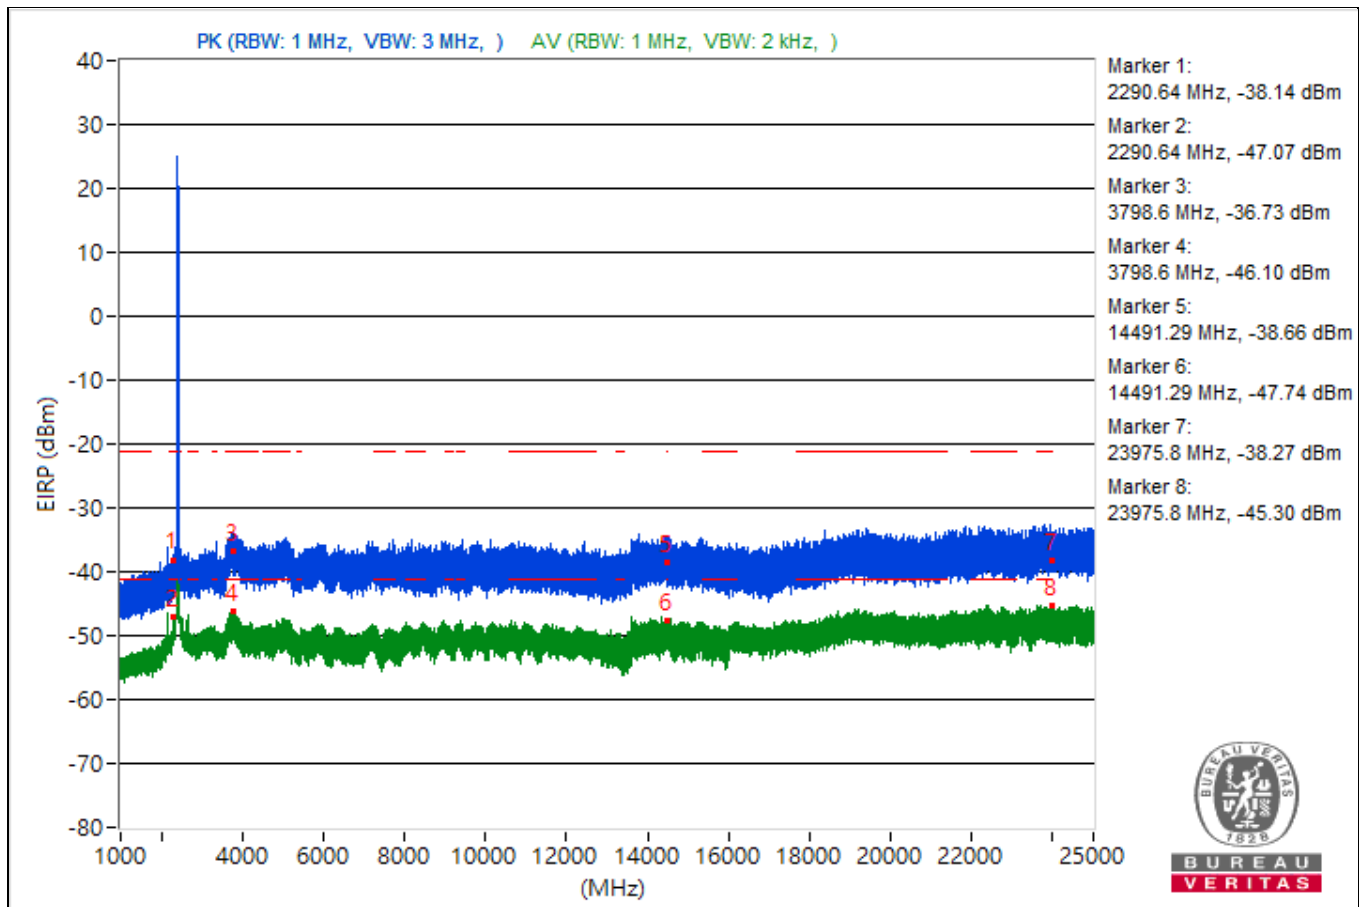

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2313.36	57.92 PK	74	-16.08	-45.73	-44.85	4.92	-37.34
2	2313.36	47.17 AV	54	-6.83	-56.38	-55.68	4.92	-48.09
3	3772	58.12 PK	74	-15.88	-44.98	-45.16	4.92	-37.14
4	3772	49.06 AV	54	-4.94	-53.03	-55.63	4.92	-46.2
5	14481.51	56.18 PK	74	-17.82	-46.77	-47.26	4.92	-39.08
6	14481.51	47.04 AV	54	-6.96	-58.28	-54.73	4.92	-48.22
7	22795.5	57.74 PK	74	-16.26	-49.78	-43.32	4.92	-37.52
8	22795.5	49.3 AV	54	-4.7	-52.4	-56.18	4.92	-45.96


Note: Margin value = Emission Level - Limit value

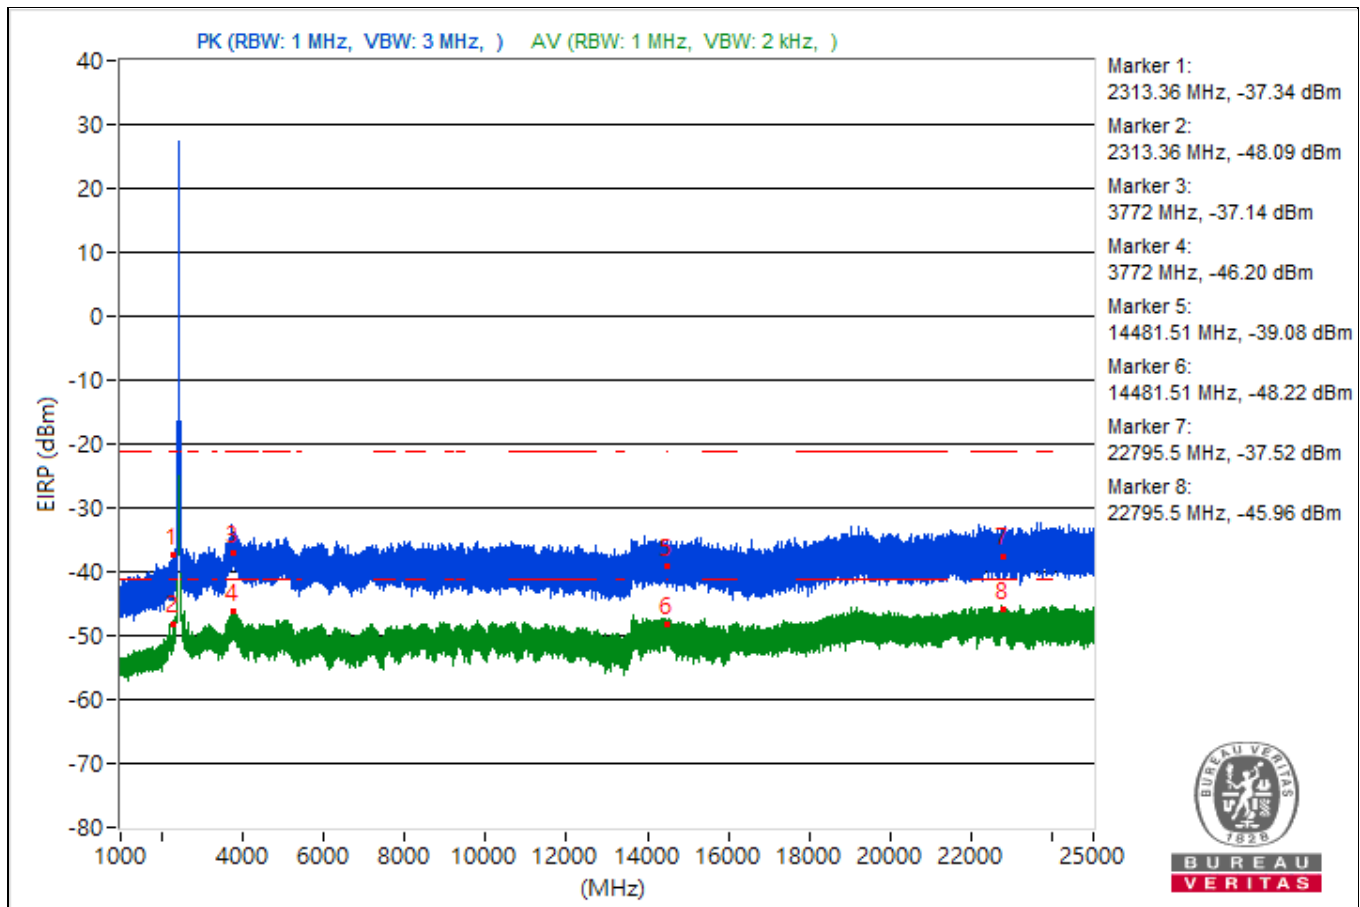

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2224.77	57.36 PK	74	-16.64	-44.39	-47.98	4.92	-37.9
2	2224.77	49.62 AV	54	-4.38	-53.44	-53.7	4.92	-45.64
3	3782.34	59.27 PK	74	-14.73	-43.61	-44.26	4.92	-35.99
4	3782.34	48.87 AV	54	-5.13	-55.35	-53.48	4.92	-46.39
5	14478.13	56.29 PK	74	-17.71	-49.55	-45.27	4.92	-38.97
6	14478.13	48.01 AV	54	-5.99	-55.82	-54.63	4.92	-47.25
7	22364.6	59.5 PK	74	-14.5	-43.13	-44.32	4.92	-35.76
8	22364.6	49.91 AV	54	-4.09	-54.42	-52.38	4.92	-45.35


Note: Margin value = Emission Level - Limit value

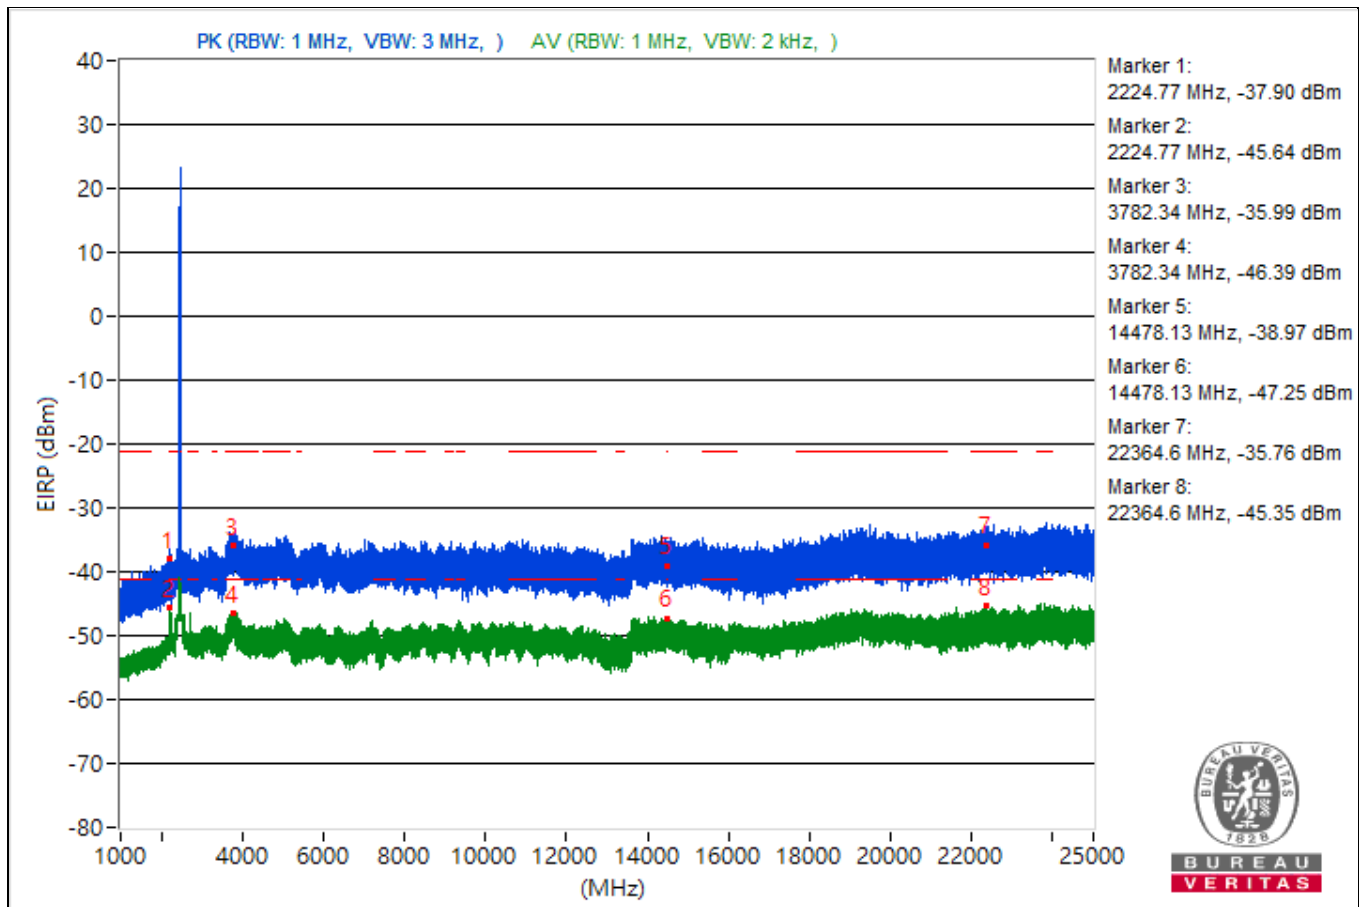

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2230.6	54.92 PK	74	-19.08	-48.48	-48.07	4.92	-40.34
2	2230.6	46.96 AV	54	-7.04	-55.73	-56.79	4.92	-48.3
3	3805.13	59.8 PK	74	-14.2	-41.99	-45.46	4.92	-35.46
4	3805.13	48.69 AV	54	-5.31	-53.51	-55.79	4.92	-46.57
5	15351.64	56.46 PK	74	-17.54	-48.31	-45.57	4.92	-38.8
6	15351.64	47.31 AV	54	-6.69	-54.74	-57.43	4.92	-47.95
7	22418.6	60 PK	74	-14	-42.39	-44.17	4.92	-35.26
8	22418.6	49.86 AV	54	-4.14	-52.1	-55.05	4.92	-45.4


Note: Margin value = Emission Level - Limit value

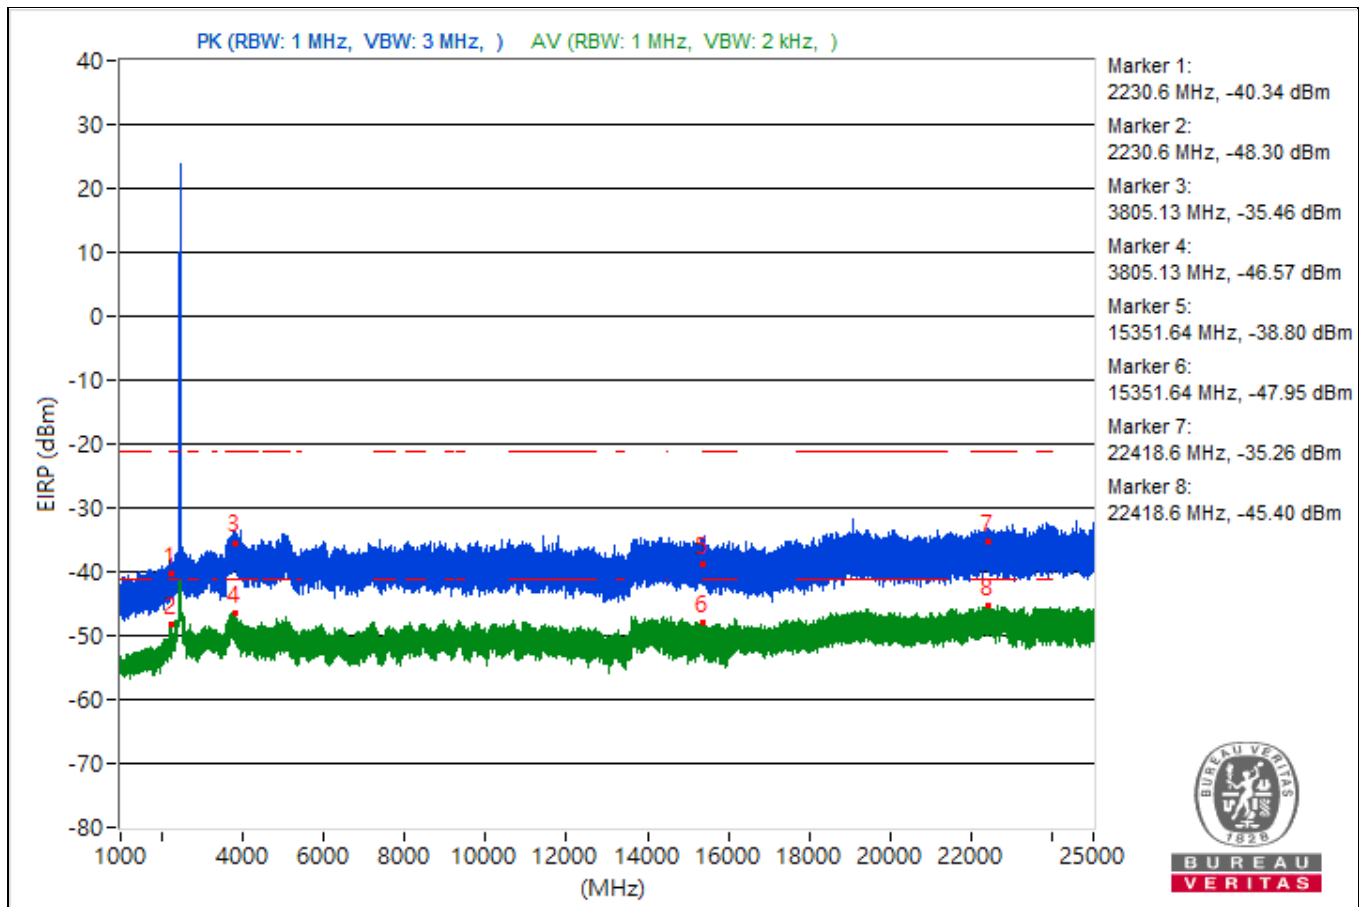

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2235.27	56.61 PK	74	-17.39	-45.78	-47.57	4.92	-38.65
2	2235.27	46.38 AV	54	-7.62	-57.31	-56.37	4.92	-48.88
3	3711.57	58.73 PK	74	-15.27	-43.65	-45.44	4.92	-36.53
4	3711.57	49.34 AV	54	-4.66	-52.93	-55.02	4.92	-45.92
5	15350.04	54.84 PK	74	-19.16	-48.68	-48.05	4.92	-40.42
6	15350.04	46.92 AV	54	-7.08	-58.7	-54.72	4.92	-48.34
7	23847.7	60.86 PK	74	-13.14	-42.9	-41.83	4.92	-34.4
8	23847.7	49.52 AV	54	-4.48	-52.2	-55.89	4.92	-45.74

Note: Margin value = Emission Level - Limit value

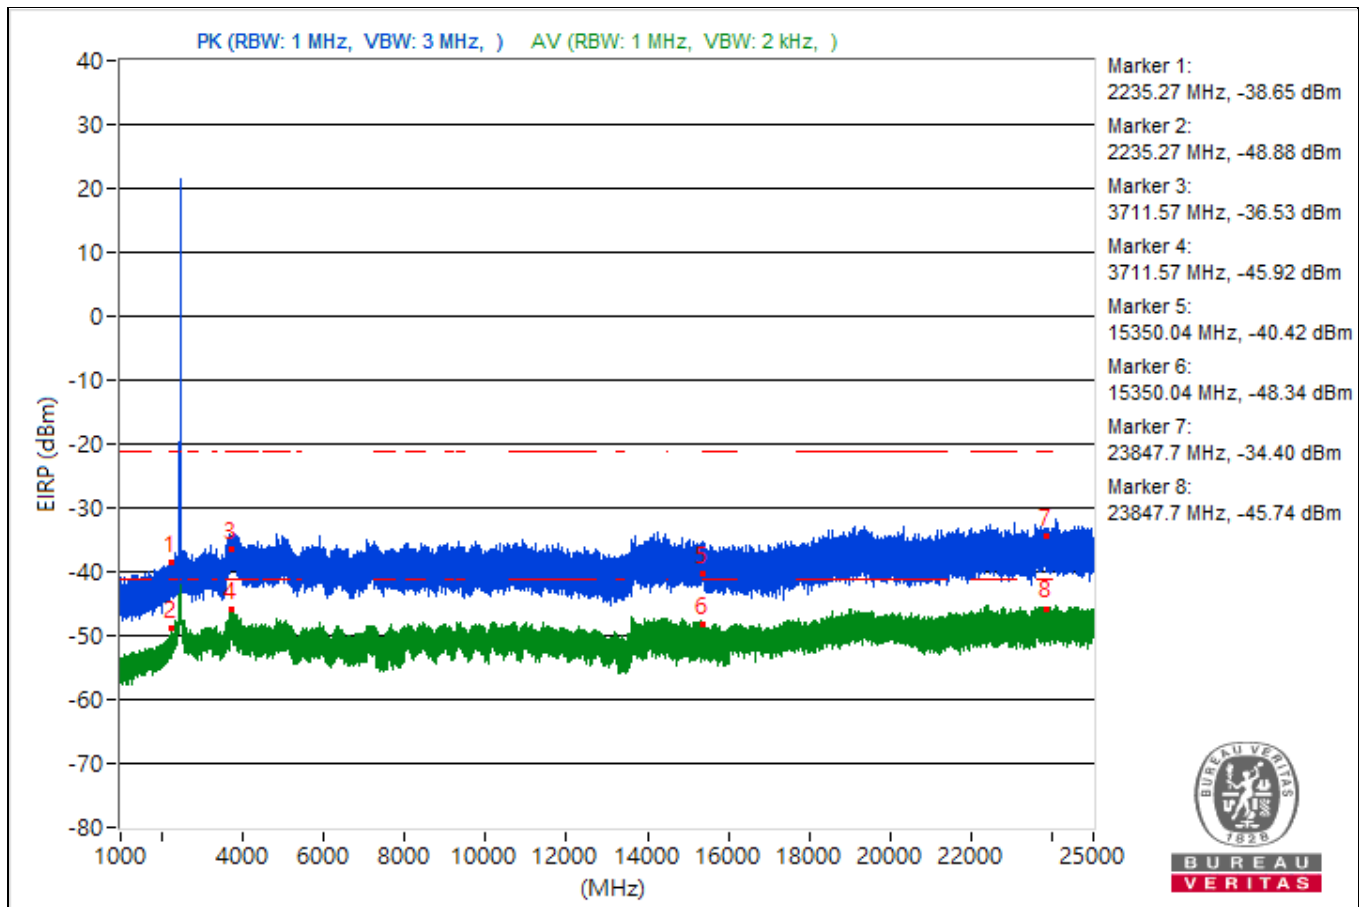


Conducted Band Edges

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2411.18	120.9 PK			16.58	16.29	6.19	25.64
2	*2411.18	117.36 AV			13.09	12.71	6.19	22.1
3	2385.72	61.54 PK	74	-12.46	-43.82	-42.17	6.19	-33.72
4	2385.72	53.36 AV	54	-0.64	-52.82	-49.88	6.19	-41.9
5	2484.82	55.62 PK	74	-18.38	-49.35	-48.37	6.19	-39.64
6	2484.82	45.44 AV	54	-8.56	-59.17	-58.89	6.19	-49.82

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

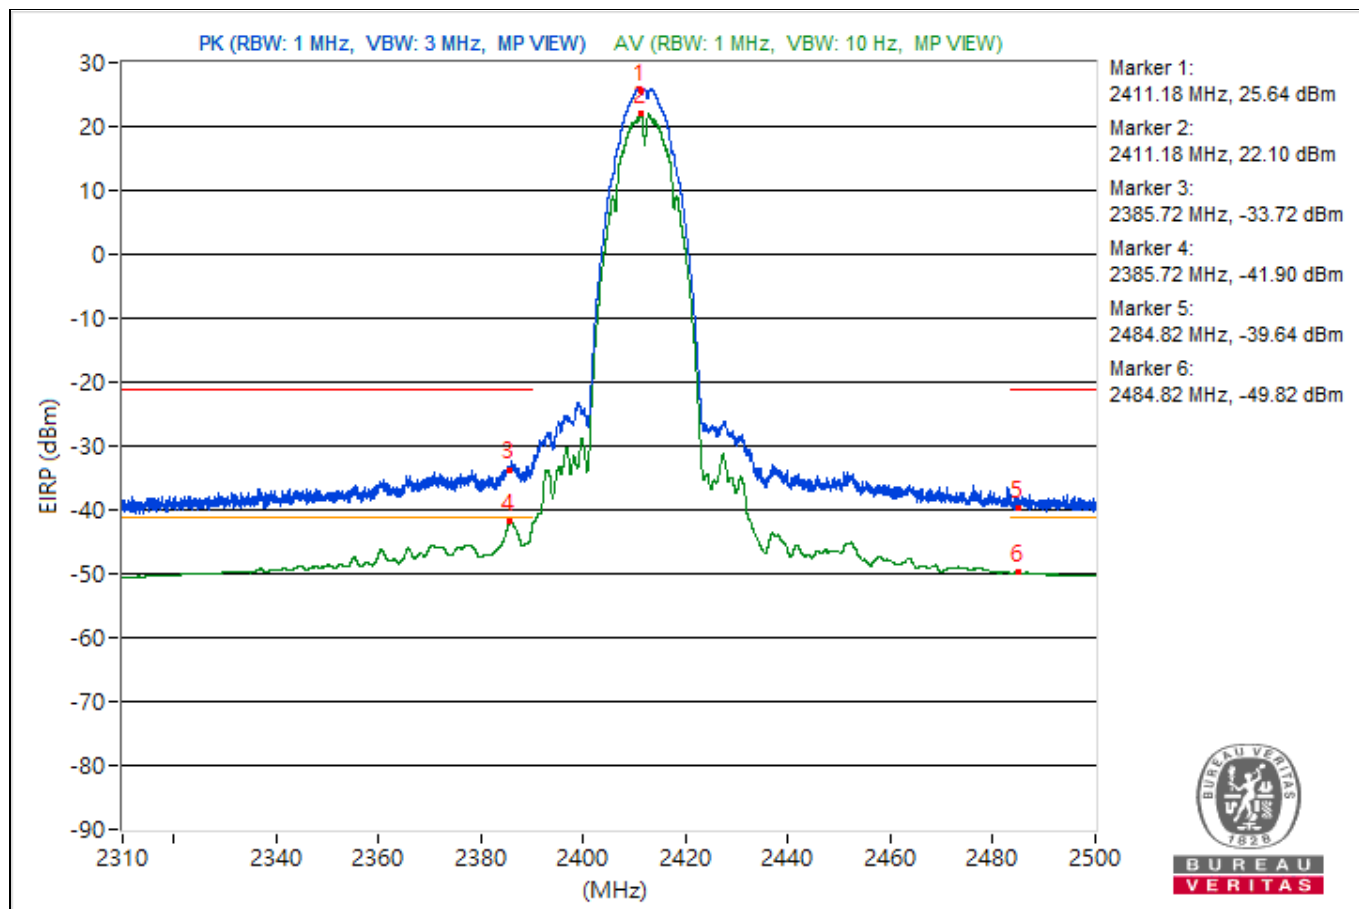


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry HSU		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2436.23	120.95 PK			16.58	16.4	6.19	25.69
2	*2436.23	117.44 AV			12.93	13.02	6.19	22.18
3	2385.67	60.54 PK	74	-13.46	-44.74	-43.22	6.19	-34.72
4	2385.67	48.97 AV	54	-5.03	-55.27	-55.73	6.19	-46.29
5	2488.62	59.89 PK	74	-14.11	-44.59	-44.56	6.19	-35.37
6	2488.62	49.24 AV	54	-4.76	-54.88	-55.59	6.19	-46.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

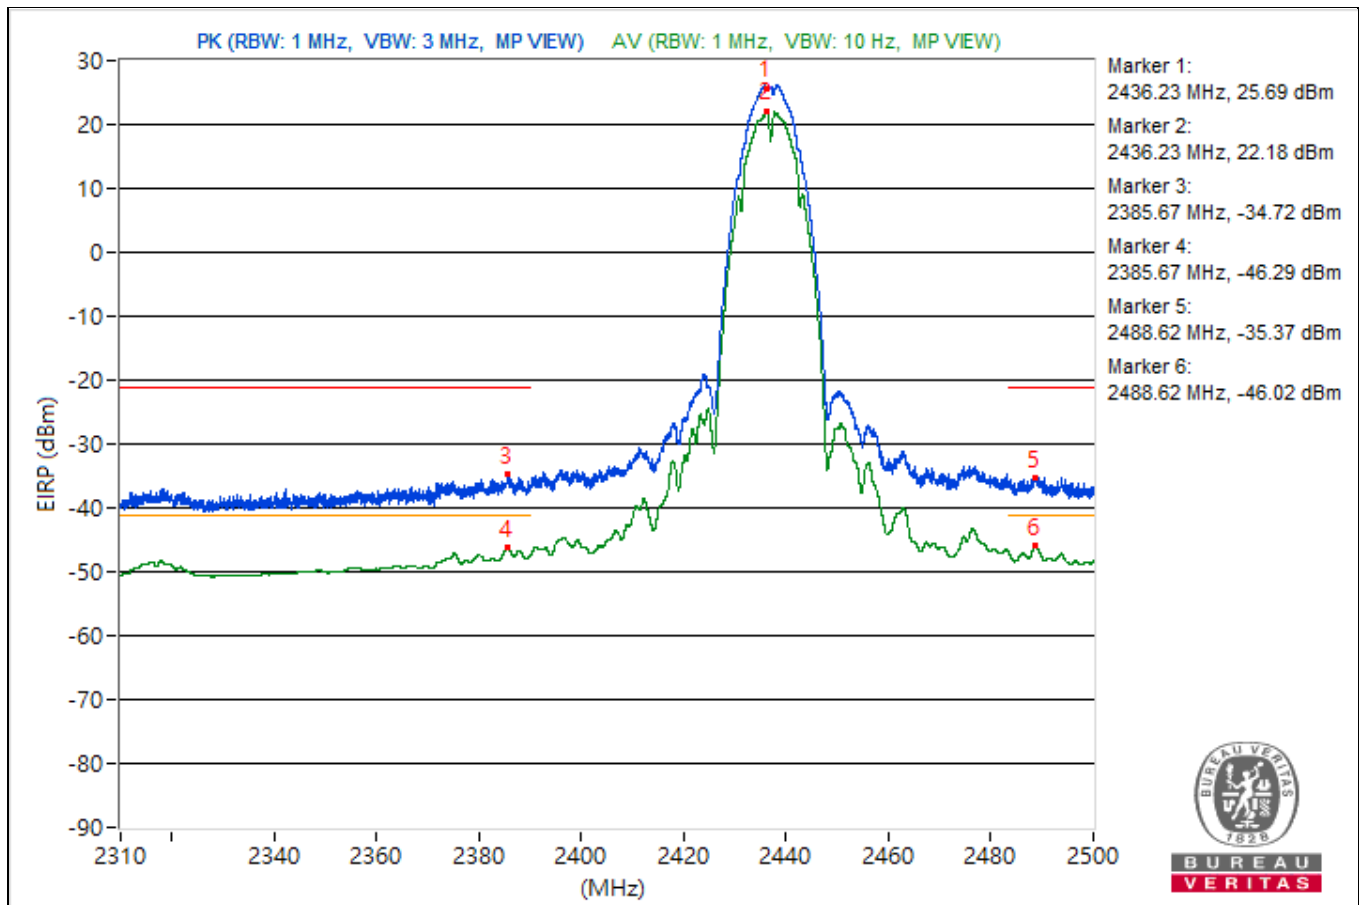


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry HSU		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2461.26	120.88 PK			16.52	16.31	6.19	25.62
2	*2461.26	117.52 AV			13.12	13	6.19	22.26
3	2341.11	56.91 PK	74	-17.09	-48.15	-47.03	6.19	-38.35
4	2341.11	46.67 AV	54	-7.33	-58.56	-57.15	6.19	-48.59
5	2491.26	59.93 PK	74	-14.07	-45.85	-43.52	6.19	-35.33
6	2491.26	51.03 AV	54	-2.97	-56.36	-51.69	6.19	-44.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

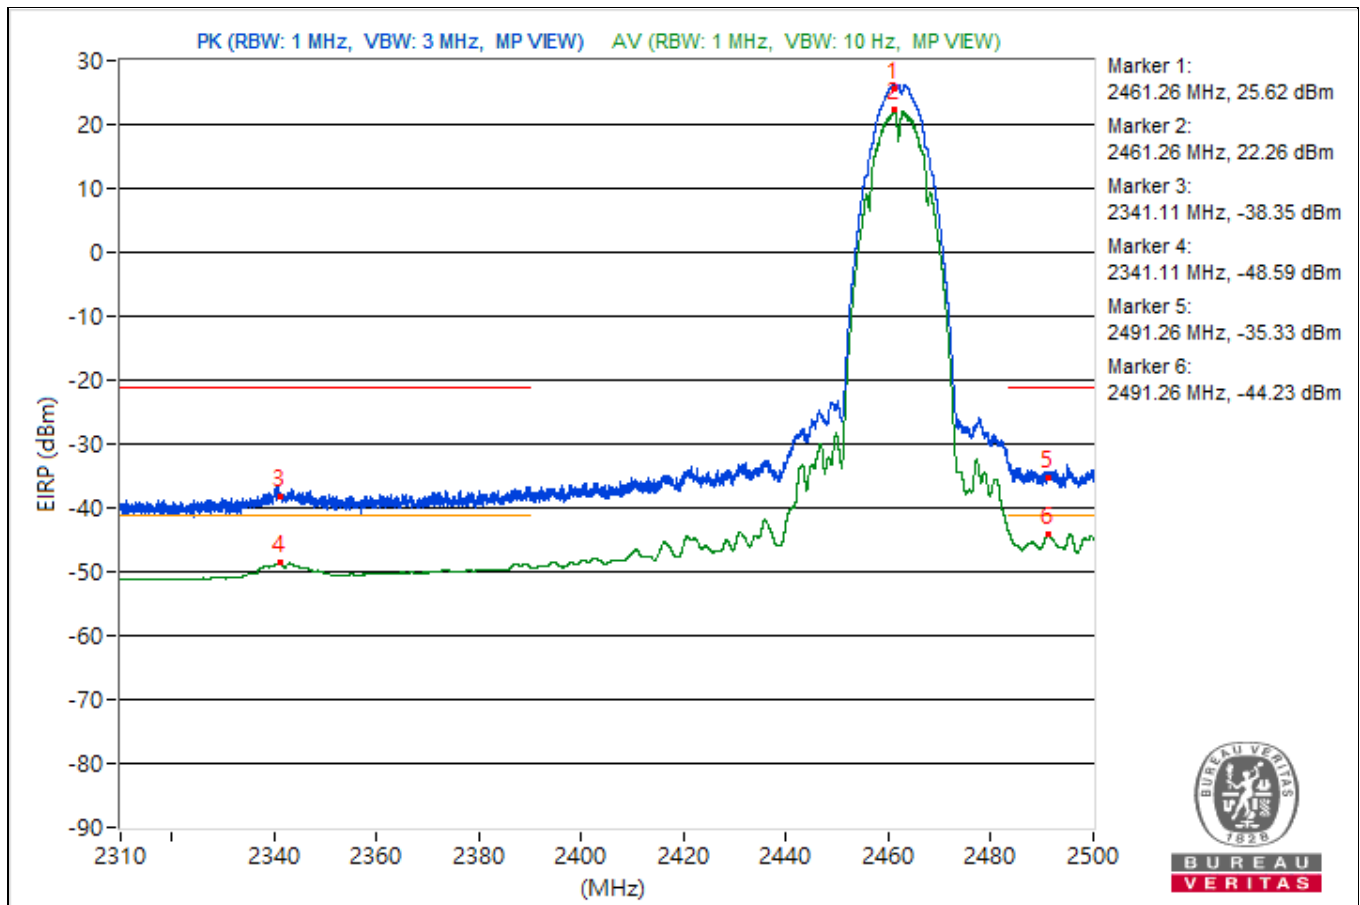


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry HSU		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2466.16	117.95 PK			13.51	13.48	6.19	22.69
2	*2466.16	114.45 AV			9.96	10.03	6.19	19.19
3	2345.96	58.08 PK	74	-15.92	-46.83	-45.96	6.19	-37.18
4	2345.96	47.26 AV	54	-6.74	-57.4	-57.01	6.19	-48
5	2483.54	61.15 PK	74	-12.85	-43.07	-43.57	6.19	-34.11
6	2483.54	53.3 AV	54	-0.7	-51.08	-51.24	6.19	-41.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

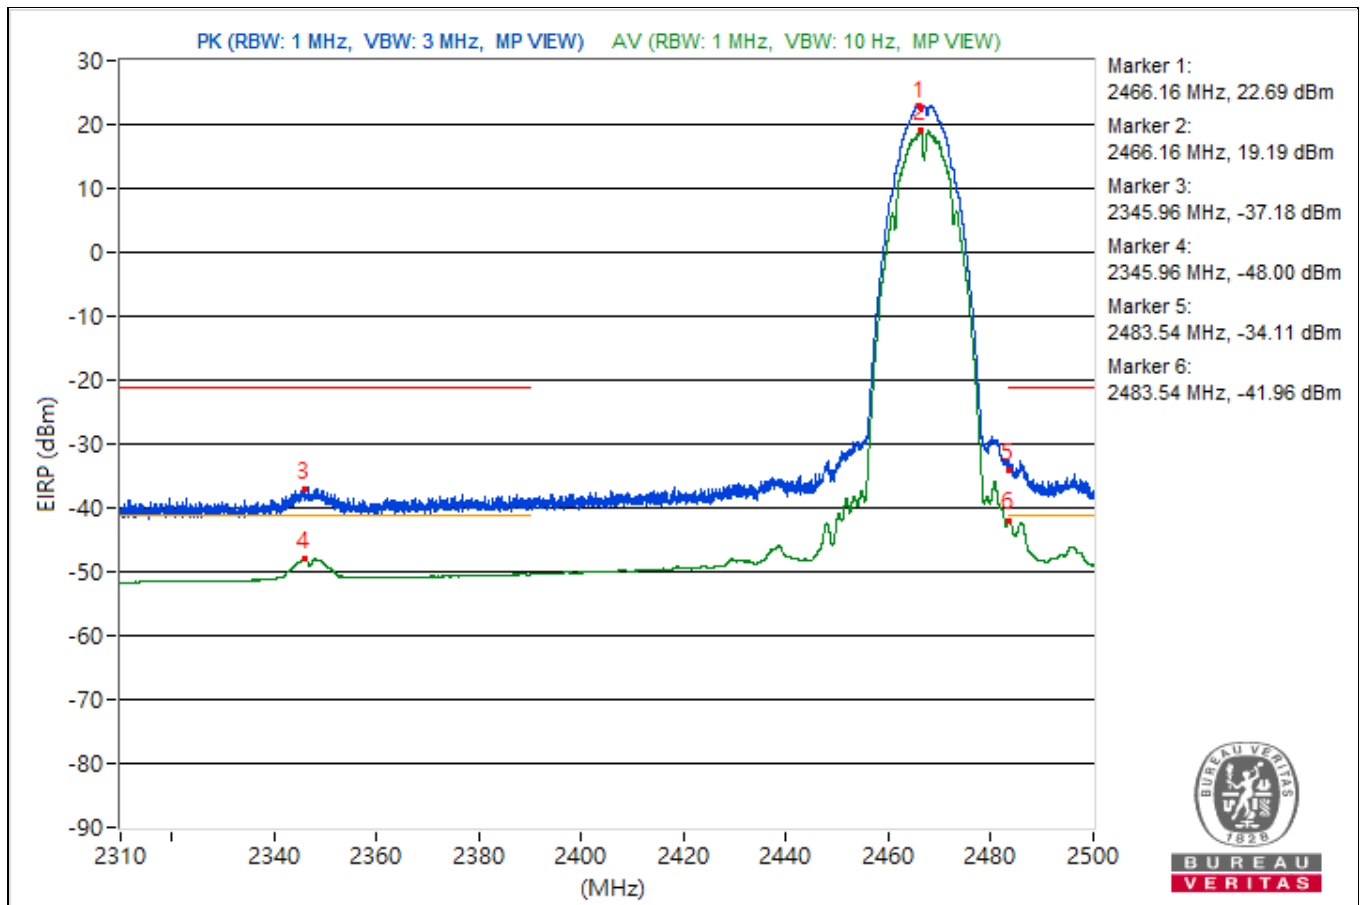


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2471.14	114.48 PK			10.05	9.99	6.19	19.22
2	*2471.14	110.83 AV			6.31	6.43	6.19	15.57
3	2352.94	54.53 PK	74	-19.47	-50.32	-49.58	6.19	-40.73
4	2352.94	44.68 AV	54	-9.32	-59.45	-60.13	6.19	-50.58
5	2484.25	61.35 PK	74	-12.65	-42.84	-43.4	6.19	-33.91
6	2484.25	53.96 AV	54	-0.04	-51.02	-50.03	6.19	-41.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

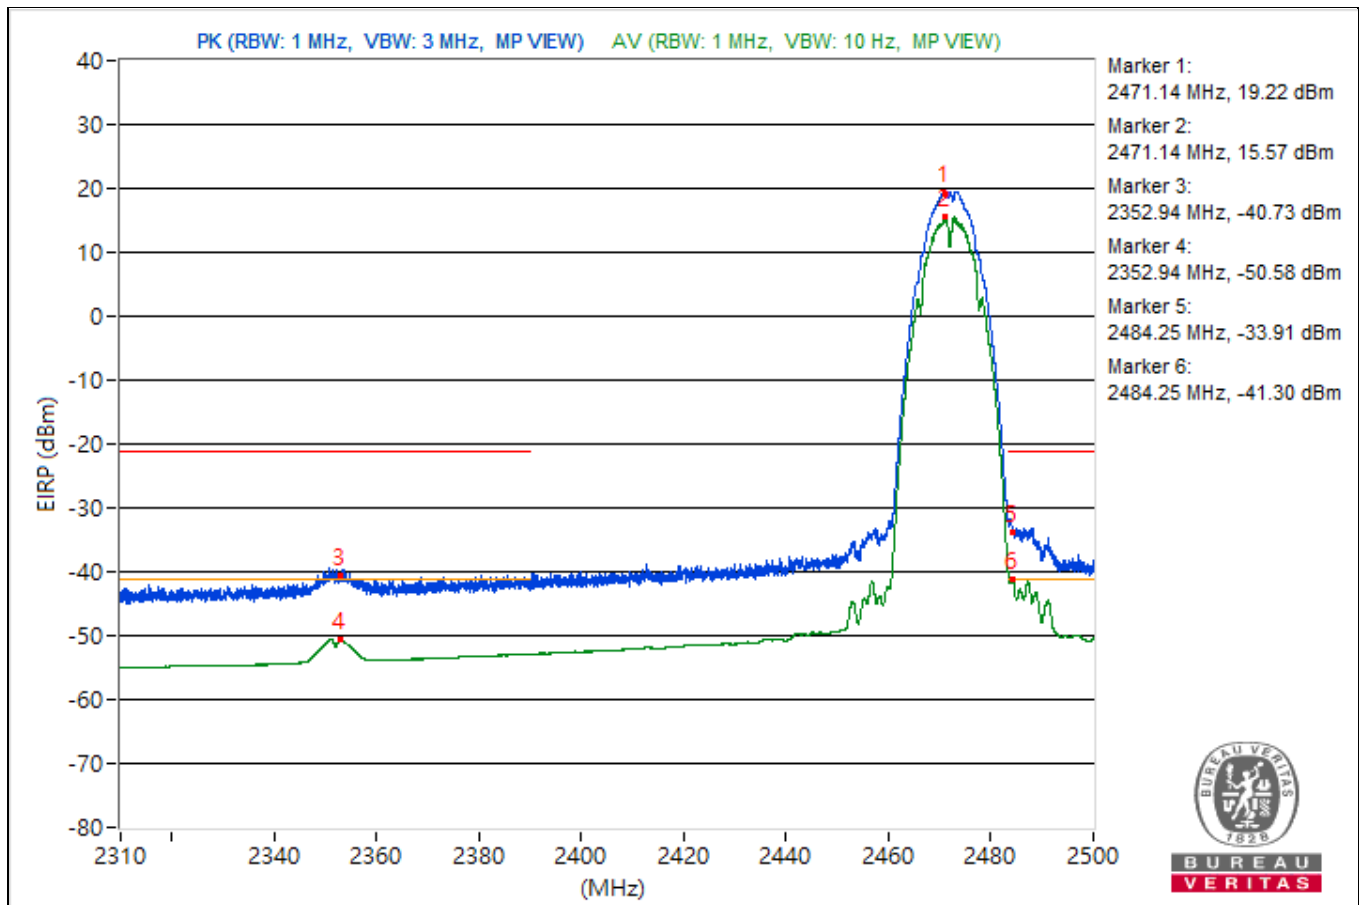


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.63	118.22 PK			13.97	13.53	6.19	22.96
2	*2410.63	108.74 AV			4.25	4.31	6.19	13.48
3	2389.87	62.48 PK	74	-11.52	-41.37	-42.69	6.19	-32.78
4	2389.87	51.21 AV	54	-2.79	-53.58	-52.94	6.19	-44.05
5	2483.54	53.8 PK	74	-20.2	-50.51	-50.82	6.19	-41.46
6	2483.54	43.56 AV	54	-10.44	-60.6	-61.23	6.19	-51.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

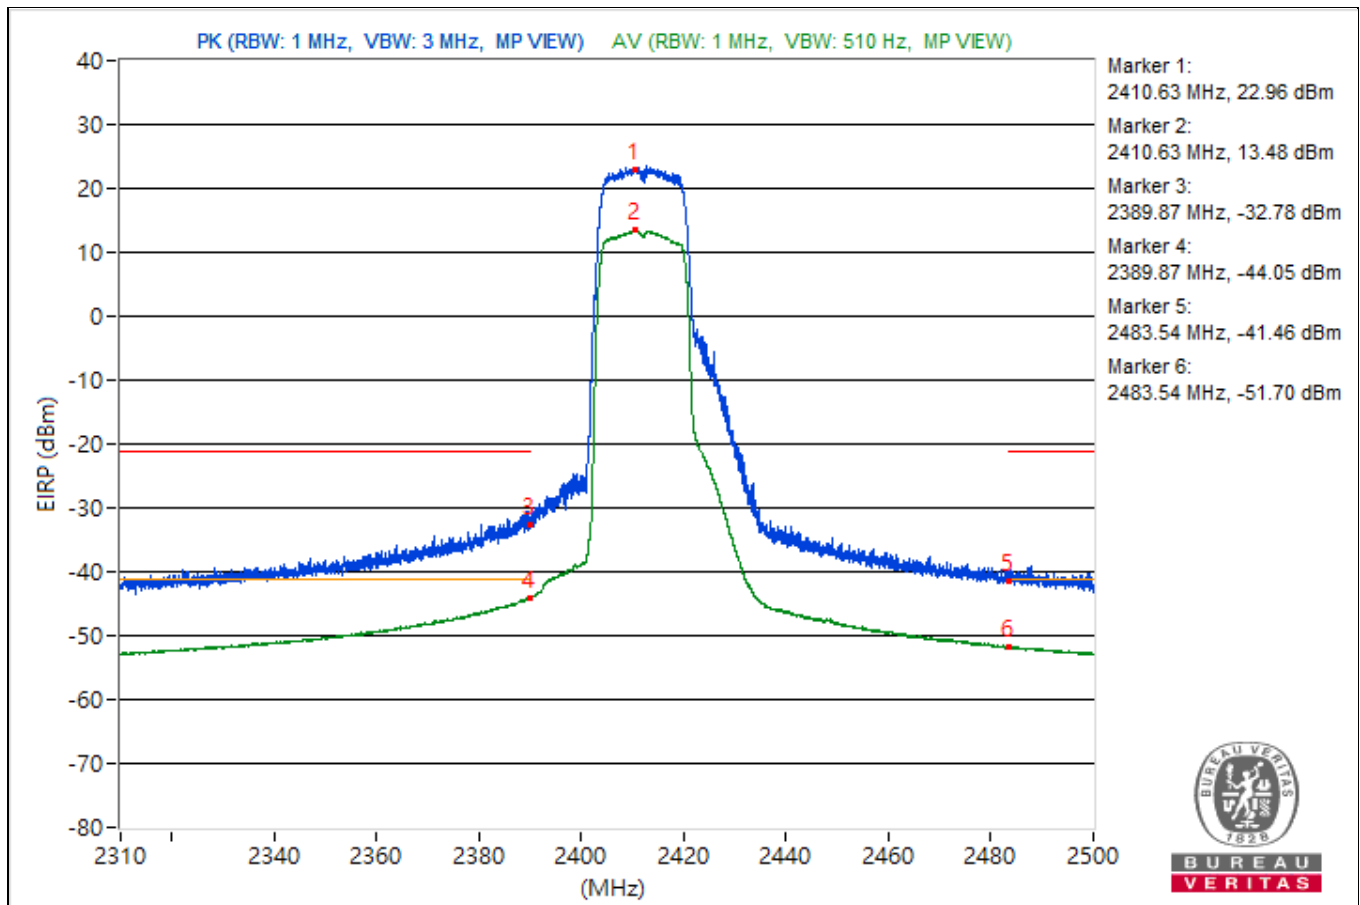


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2438.16	121.66 PK			16.99	17.41	6.19	26.4
2	*2438.16	111.54 AV			7.14	7.01	6.19	16.28
3	2389.8	68.17 PK	74	-5.83	-34.18	-40.55	6.19	-27.09
4	2389.8	53.49 AV	54	-0.51	-49.47	-53.26	6.19	-41.77
5	2483.73	70.57 PK	74	-3.43	-33.53	-34.28	6.19	-24.69
6	2483.73	53.84 AV	54	-0.16	-49.55	-52.05	6.19	-41.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

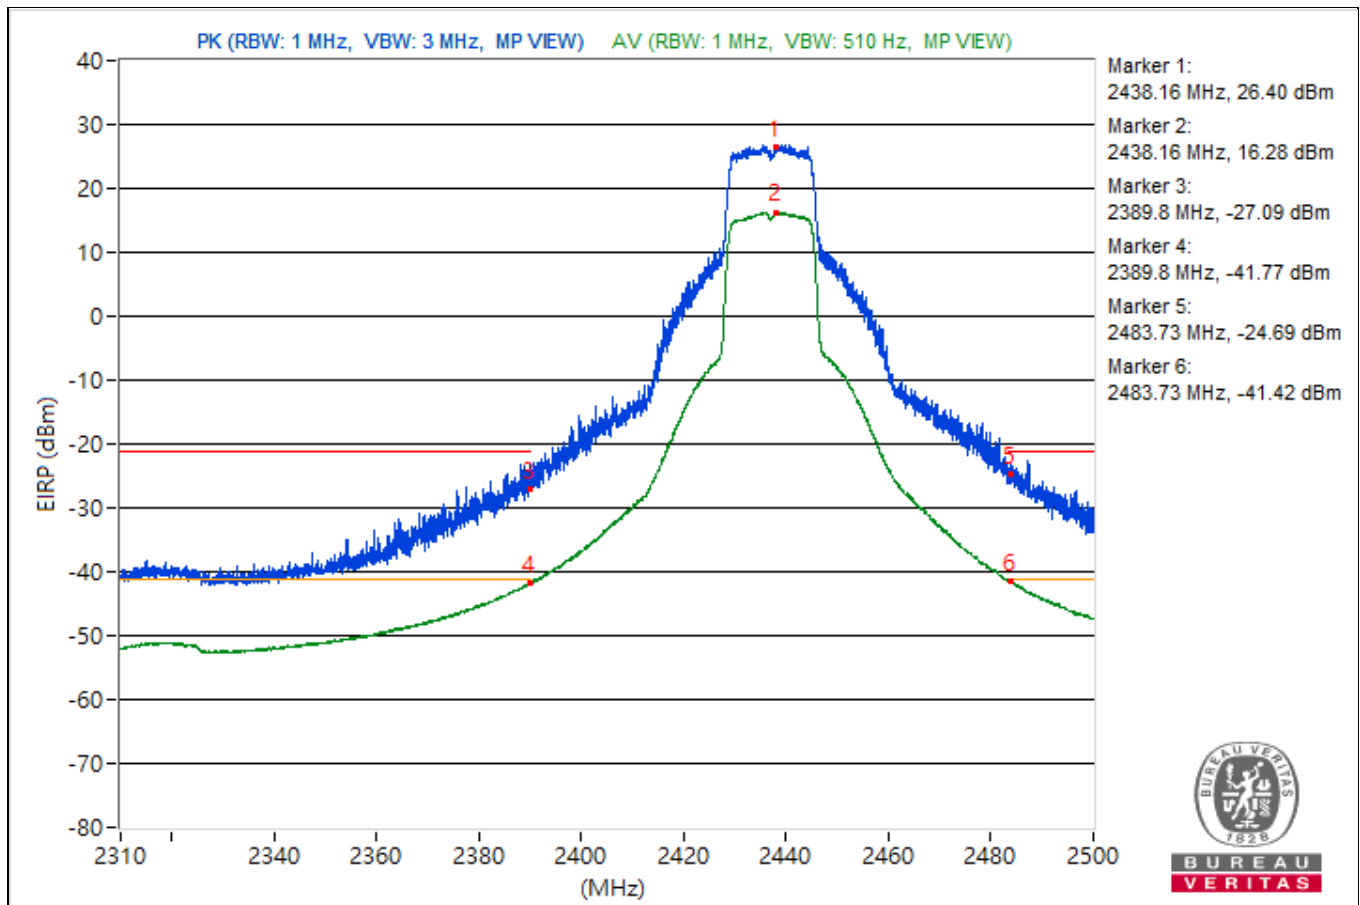


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2460.91	118.54 PK			14.13	14.02	6.19	23.28
2	*2460.91	109.35 AV			4.69	5.07	6.19	14.09
3	2389.3	56.04 PK	74	-17.96	-47.62	-49.4	6.19	-39.22
4	2389.3	44.67 AV	54	-9.33	-58.97	-60.79	6.19	-50.59
5	2483.73	62.08 PK	74	-11.92	-42.28	-42.48	6.19	-33.18
6	2483.73	51.55 AV	54	-2.45	-52.56	-53.29	6.19	-43.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

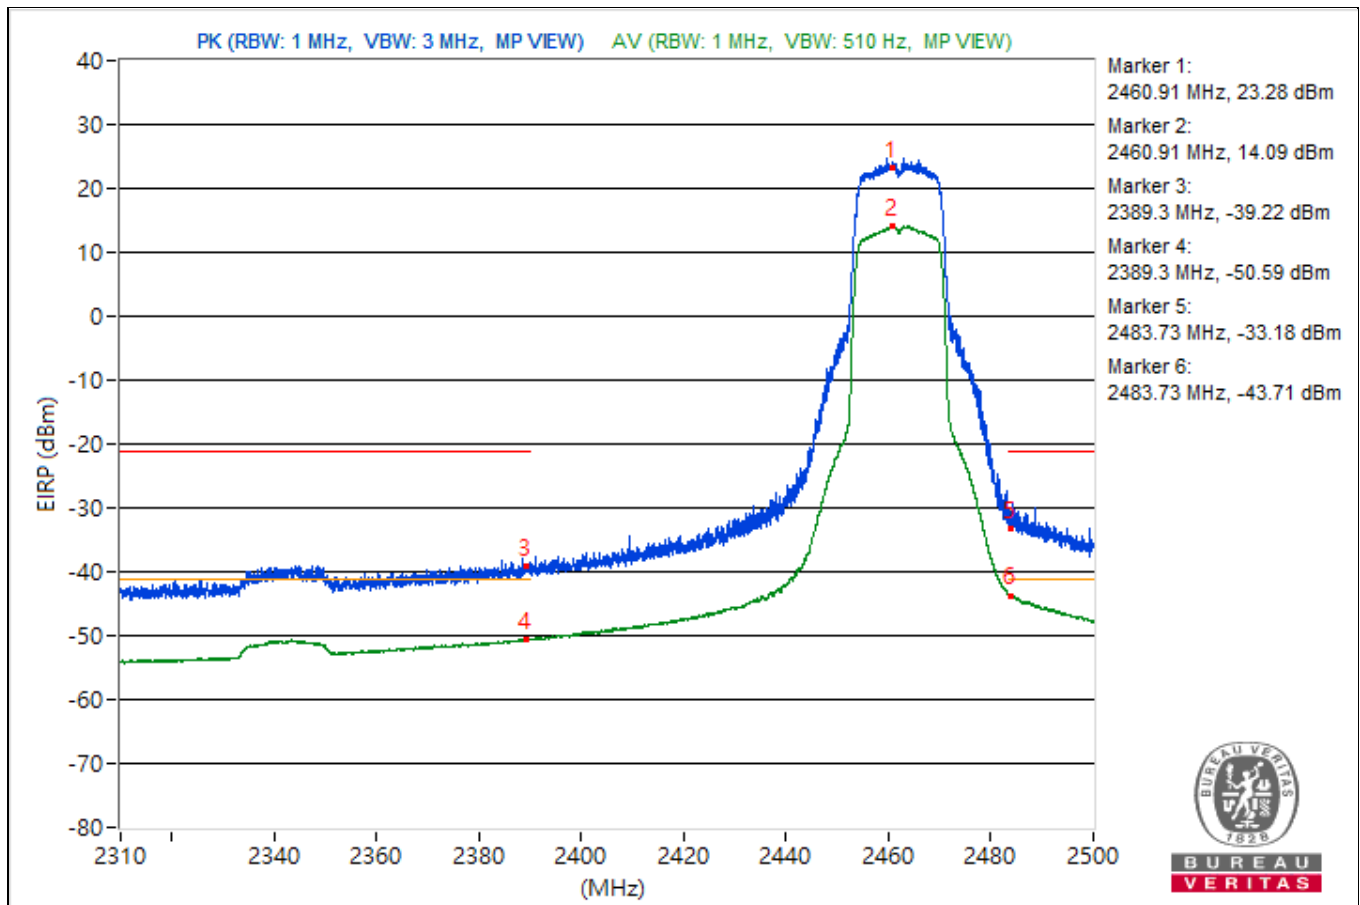


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.18	117.48 PK			13.17	12.85	6.19	22.22
2	*2468.18	107.98 AV			3.19	3.83	6.19	12.72
3	2389.11	55.44 PK	74	-18.56	-48.14	-50.11	6.19	-39.82
4	2389.11	43.79 AV	54	-10.21	-59.83	-61.7	6.19	-51.47
5	2483.57	64.97 PK	74	-9.03	-39.44	-39.54	6.19	-30.29
6	2483.57	53.37 AV	54	-0.63	-52.28	-50.16	6.19	-41.89

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

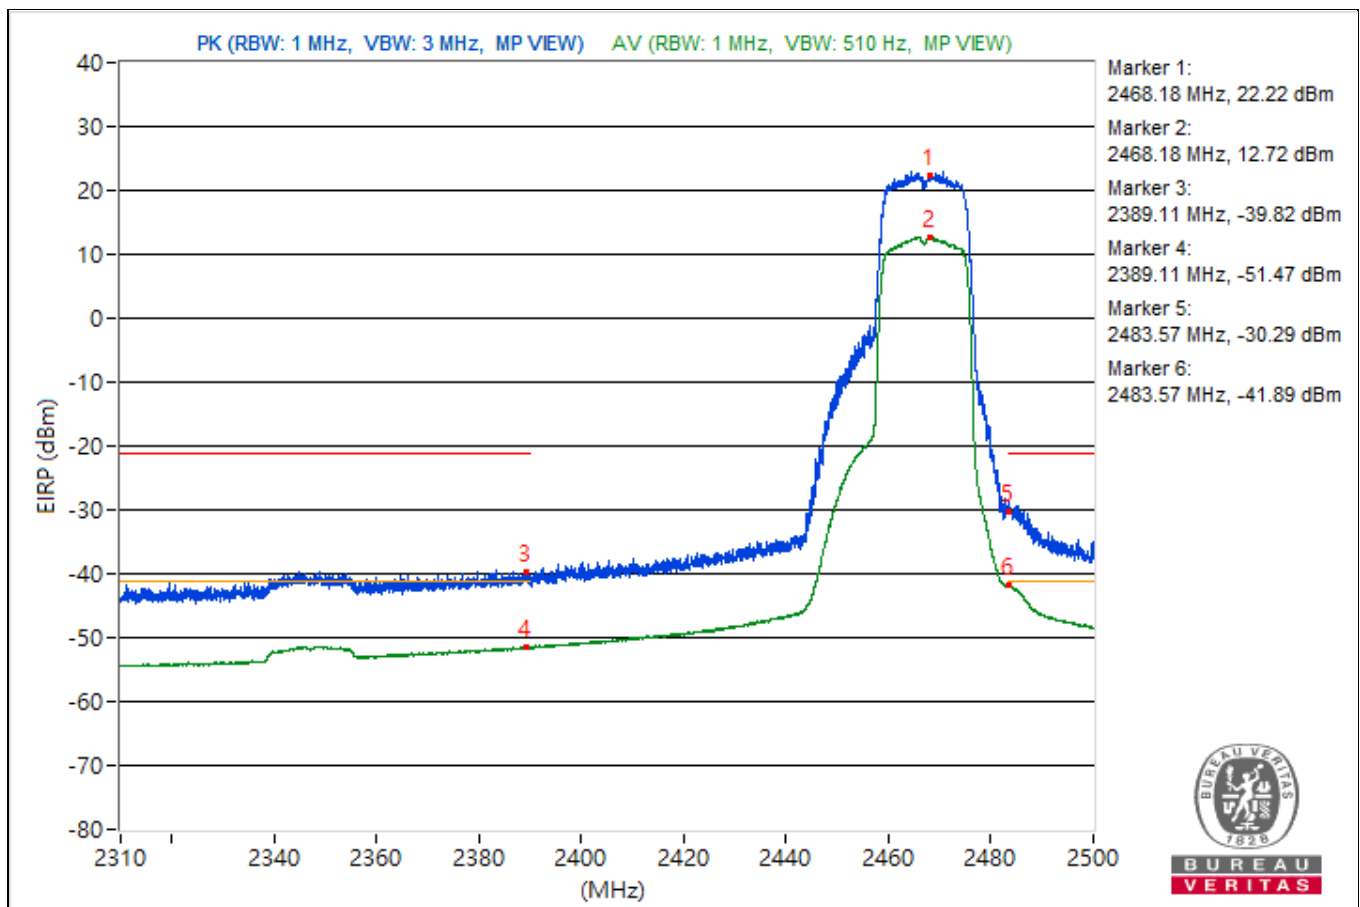


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.16	116.39 PK			11.92	11.95	6.19	21.13
2	*2473.16	107 AV			2.82	2.23	6.19	11.74
3	2353.03	54.03 PK	74	-19.97	-50.11	-50.78	6.19	-41.23
4	2353.03	43.6 AV	54	-10.4	-60.49	-61.26	6.19	-51.66
5	2484.59	66.4 PK	74	-7.6	-39.69	-36.87	6.19	-28.86
6	2484.59	53.78 AV	54	-0.22	-51.59	-49.93	6.19	-41.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

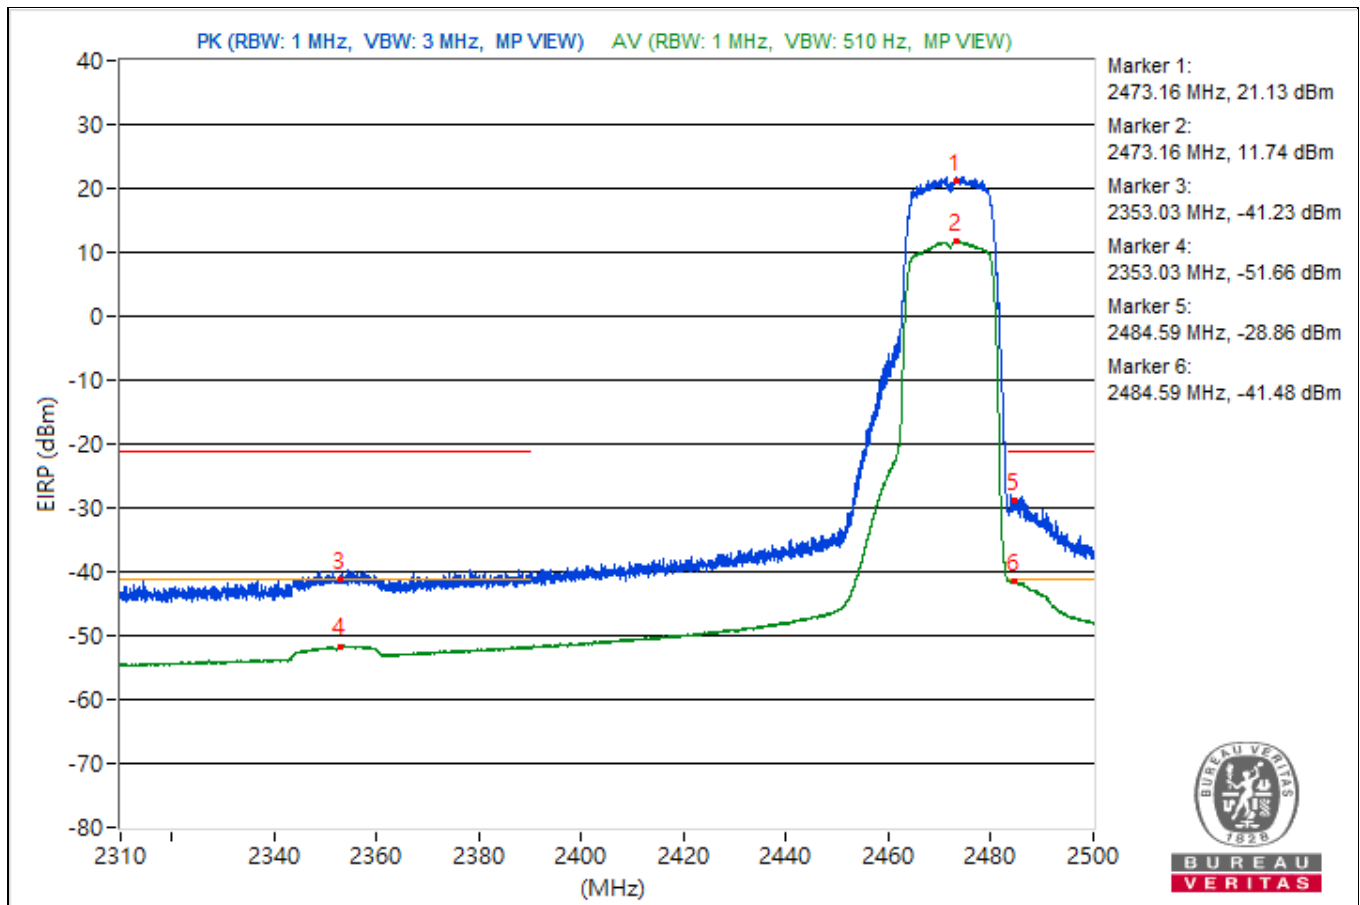


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2413.19	115.58 PK			14.45	13.78	3.18	20.32
2	*2413.19	105.81 AV			4.19	4.52	3.18	10.55
3	2389.92	60.9 PK	74	-13.1	-40.02	-41.16	3.18	-34.36
4	2389.92	49.72 AV	54	-4.28	-52.24	-51.27	3.18	-45.54
5	2483.83	50.46 PK	74	-23.54	-50.47	-51.59	3.18	-44.8
6	2483.83	40.88 AV	54	-13.12	-60.29	-60.87	3.18	-54.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

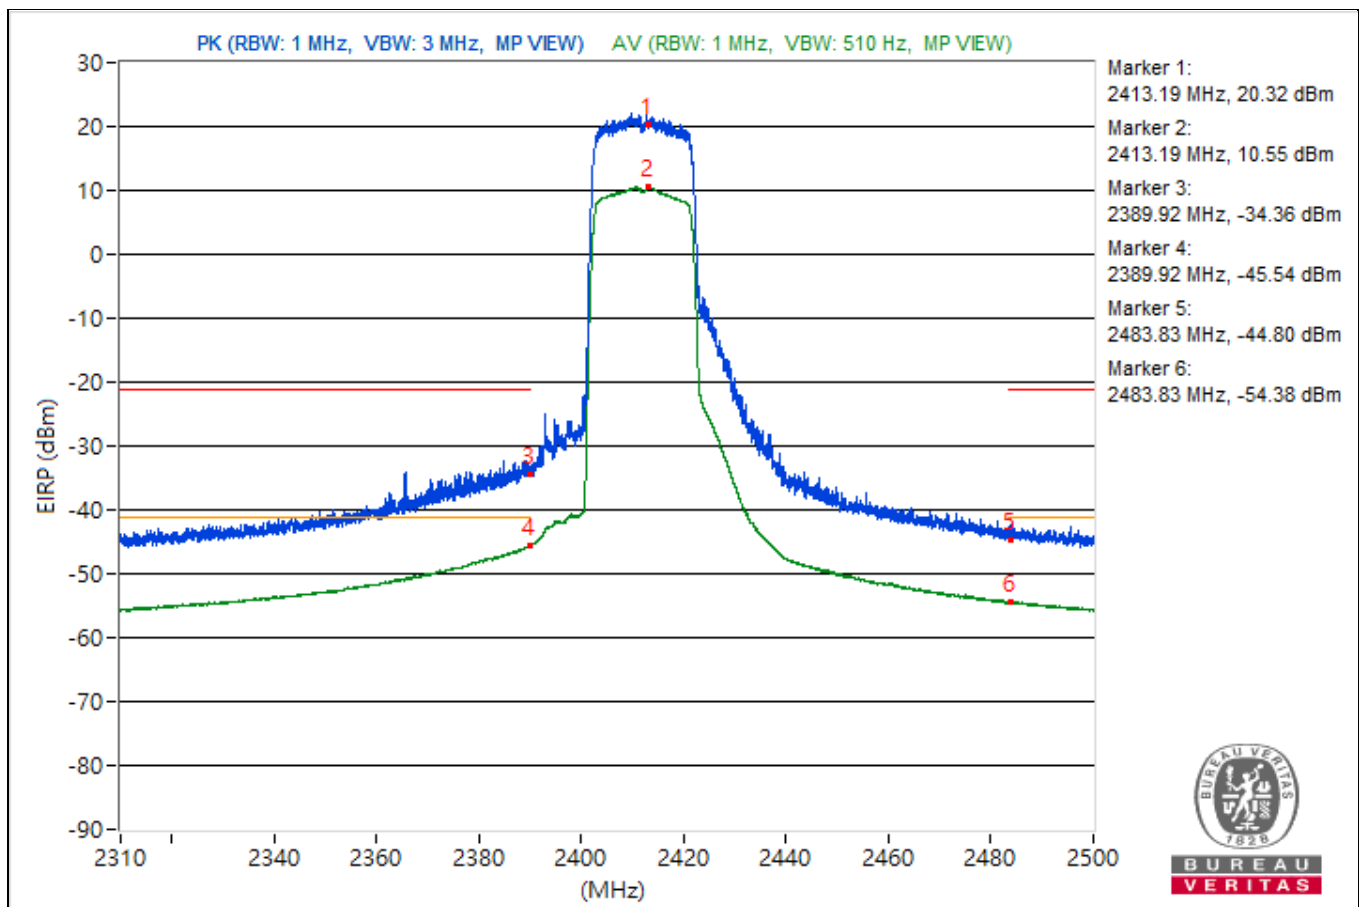


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2436.16	118.2 PK			16.45	17.04	3.18	22.94
2	*2436.16	108.24 AV			6.83	6.75	3.18	12.98
3	2389.04	63.96 PK	74	-10.04	-35.46	-41.45	3.18	-31.3
4	2389.04	49.67 AV	54	-4.33	-50.27	-54.11	3.18	-45.59
5	2483.52	64.51 PK	74	-9.49	-36.31	-37.68	3.18	-30.75
6	2483.52	49.95 AV	54	-4.05	-50.66	-52.56	3.18	-45.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

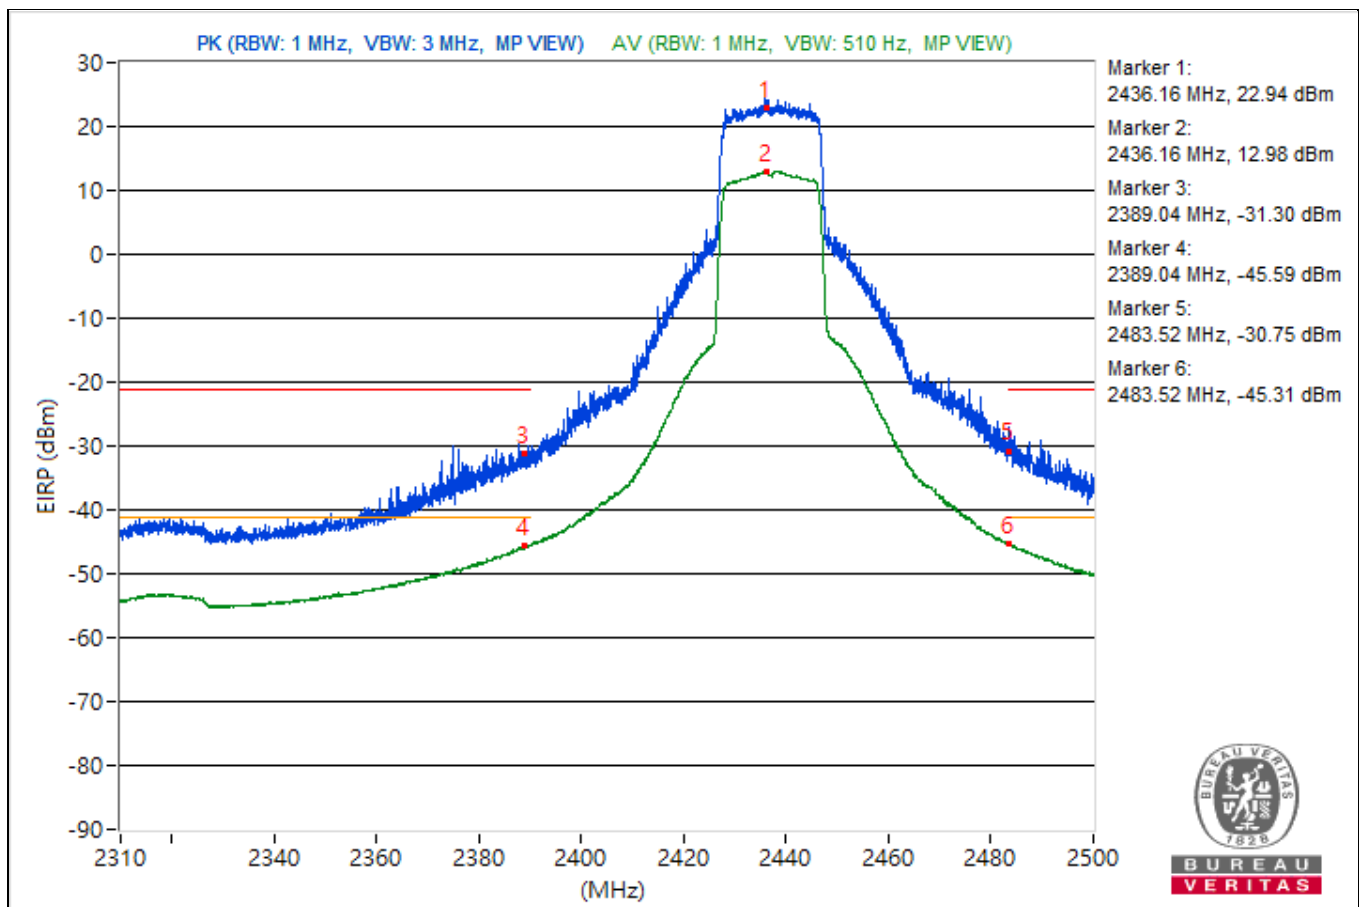


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2462.97	115.67 PK			14.37	14.06	3.18	20.41
2	*2462.97	106.06 AV			4.7	4.51	3.18	10.8
3	2389.42	52.36 PK	74	-21.64	-48.8	-49.4	3.18	-42.9
4	2389.42	41.86 AV	54	-12.14	-58.85	-60.47	3.18	-53.4
5	2483.52	64.67 PK	74	-9.33	-40.67	-34.76	3.18	-30.59
6	2483.52	50.95 AV	54	-3.05	-51.86	-49.47	3.18	-44.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

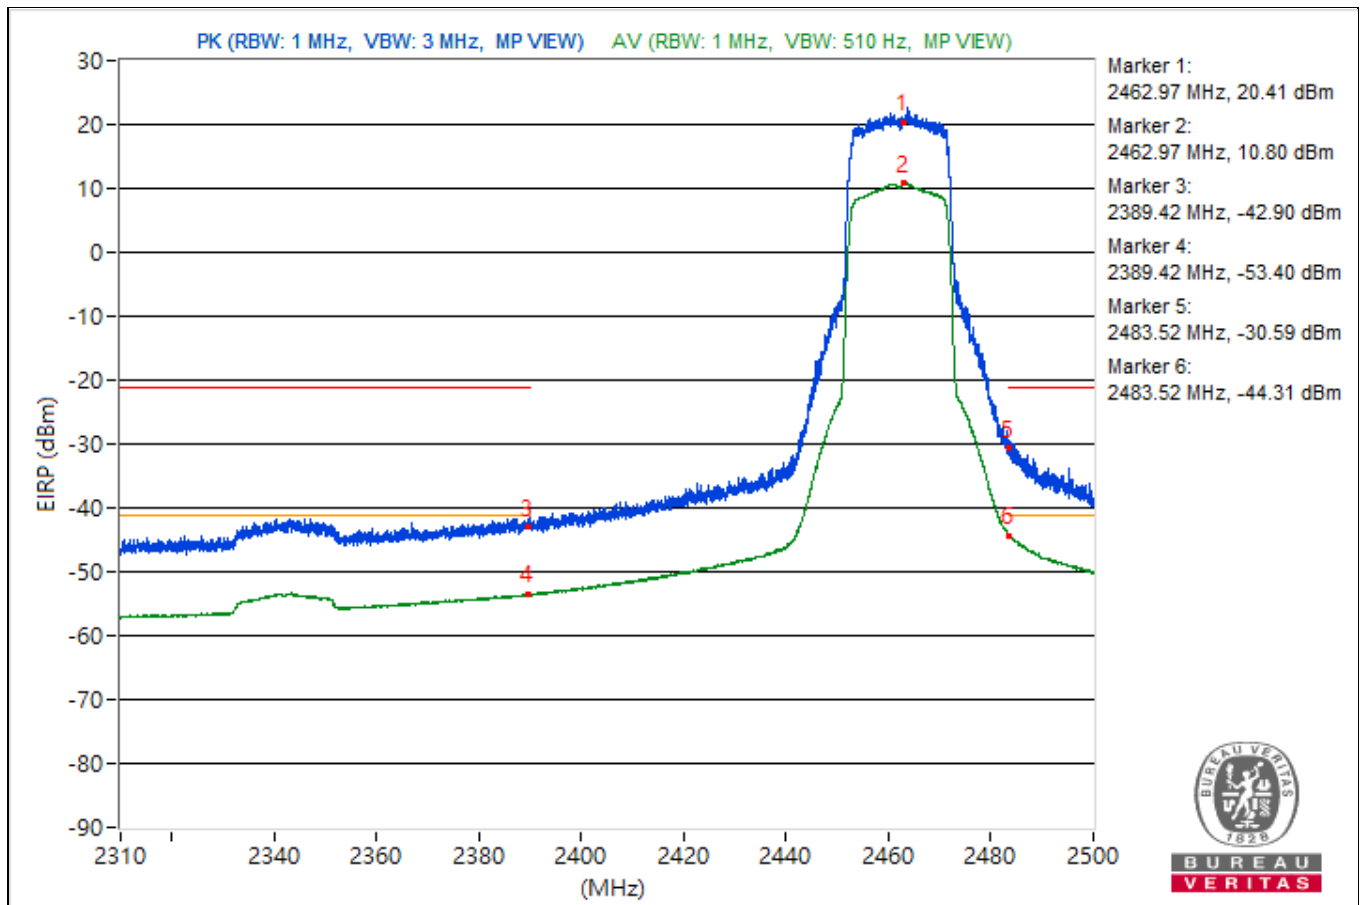


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2466.01	115.68 PK			14.71	13.7	3.18	20.42
2	*2466.01	105.56 AV			3.92	4.28	3.18	10.3
3	2348.28	52.91 PK	74	-21.09	-48.99	-48.13	3.18	-42.35
4	2348.28	41.66 AV	54	-12.34	-59.29	-60.37	3.18	-53.6
5	2483.97	67.51 PK	74	-6.49	-33.79	-34.1	3.18	-27.75
6	2483.97	52.92 AV	54	-1.08	-49.99	-47.44	3.18	-42.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

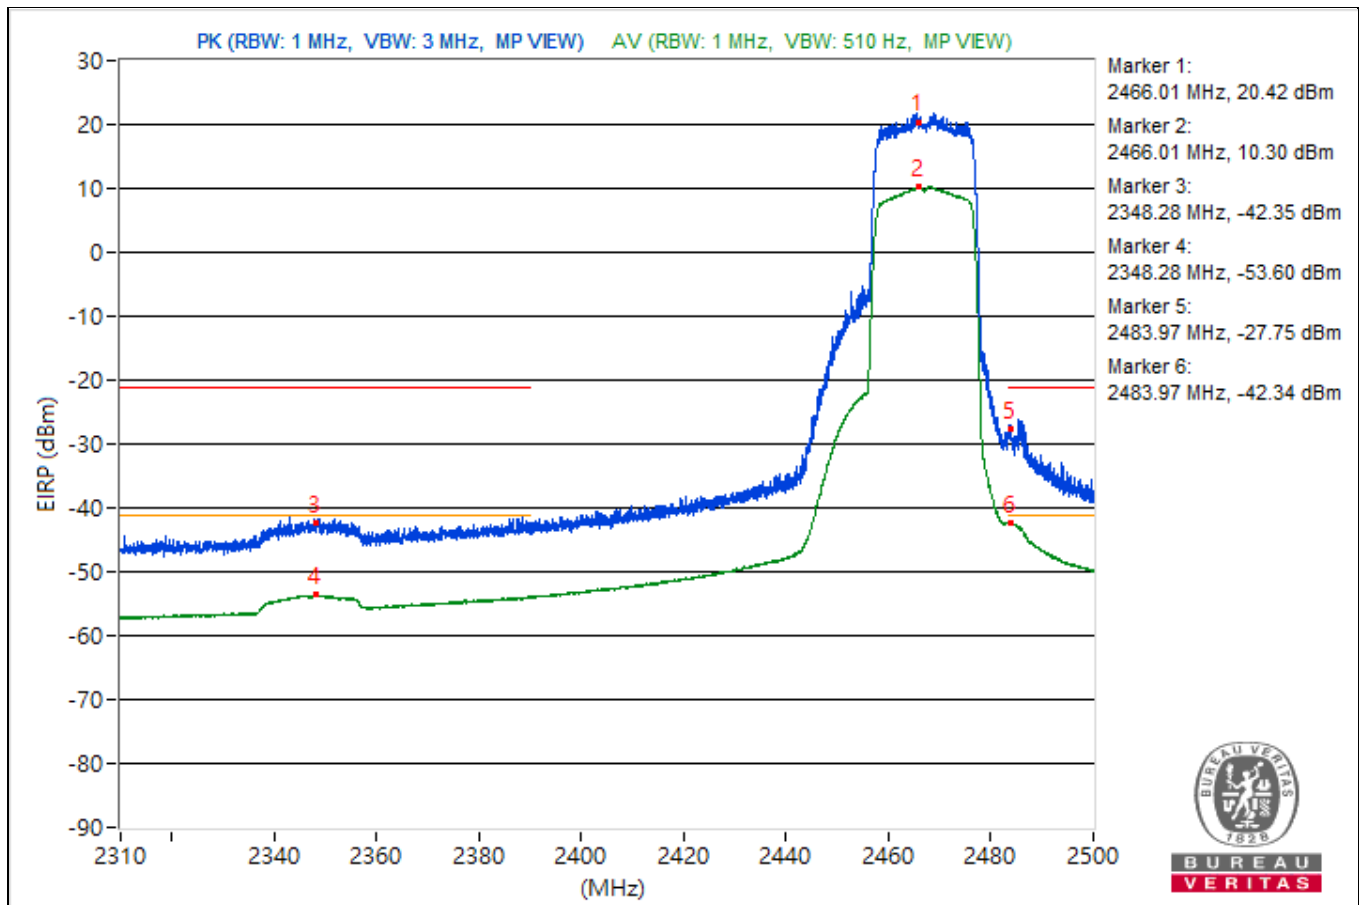


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.45	114.14 PK			12.55	12.83	3.18	18.88
2	*2473.45	104.16 AV			2.61	2.81	3.18	8.9
3	2354.65	51.76 PK	74	-22.24	-49.4	-50.01	3.18	-43.5
4	2354.65	41.08 AV	54	-12.92	-59.83	-61	3.18	-54.18
5	2483.52	65.63 PK	74	-8.37	-35.74	-35.9	3.18	-29.63
6	2483.52	53.07 AV	54	-0.93	-48.69	-48.09	3.18	-42.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

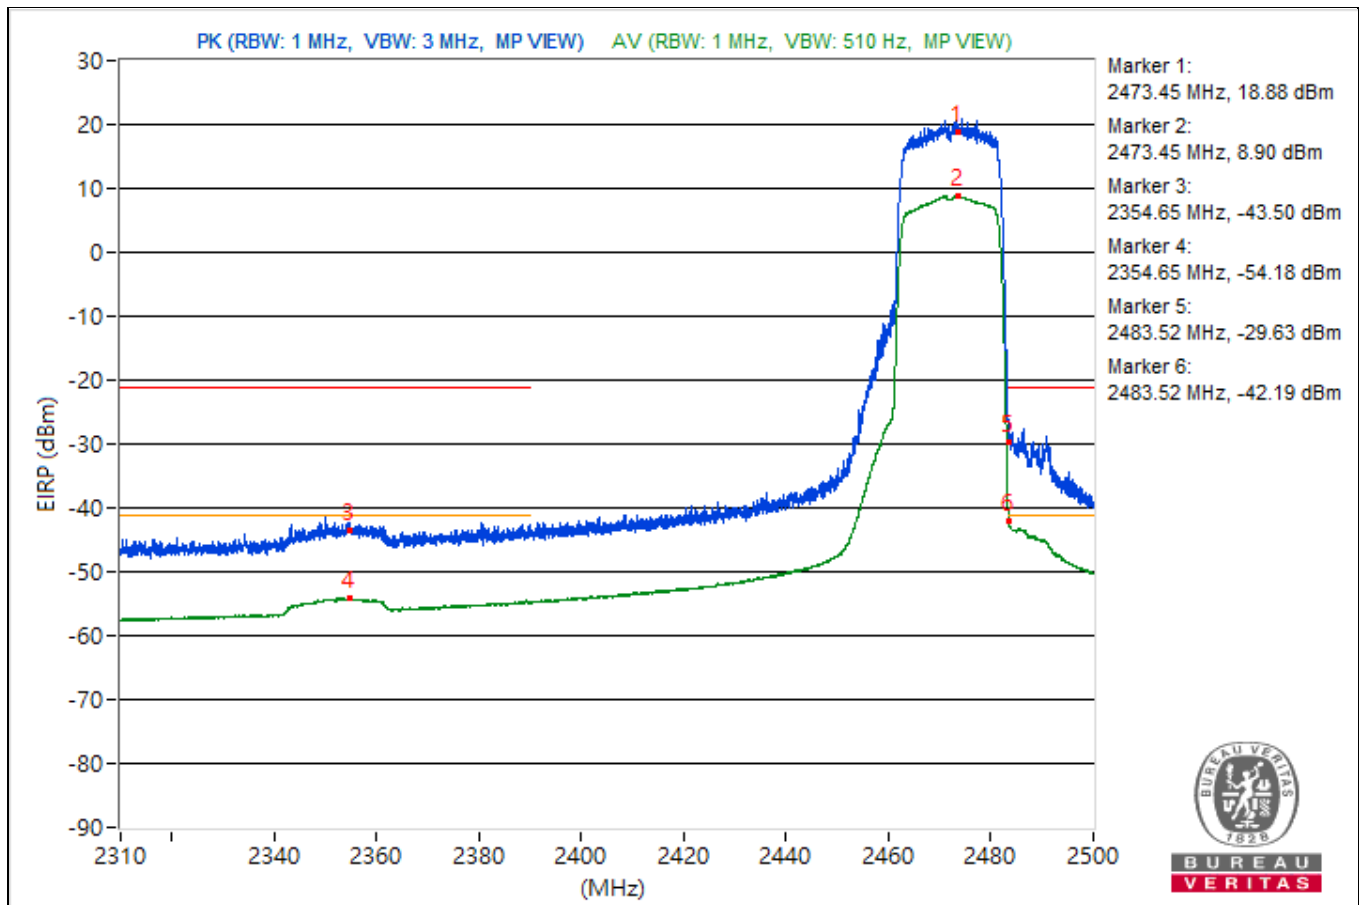


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2420.7	112.48 PK			11.14	10.92	3.18	17.22
2	*2420.7	102.78 AV			1.2	1.47	3.18	7.52
3	2389.11	65 PK	74	-9	-37.03	-35.94	3.18	-30.26
4	2389.11	49.91 AV	54	-4.09	-51.15	-51.96	3.18	-45.35
5	2484.09	56.41 PK	74	-17.59	-45.18	-44.91	3.18	-38.85
6	2484.09	44.48 AV	54	-9.52	-56.79	-57.16	3.18	-50.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

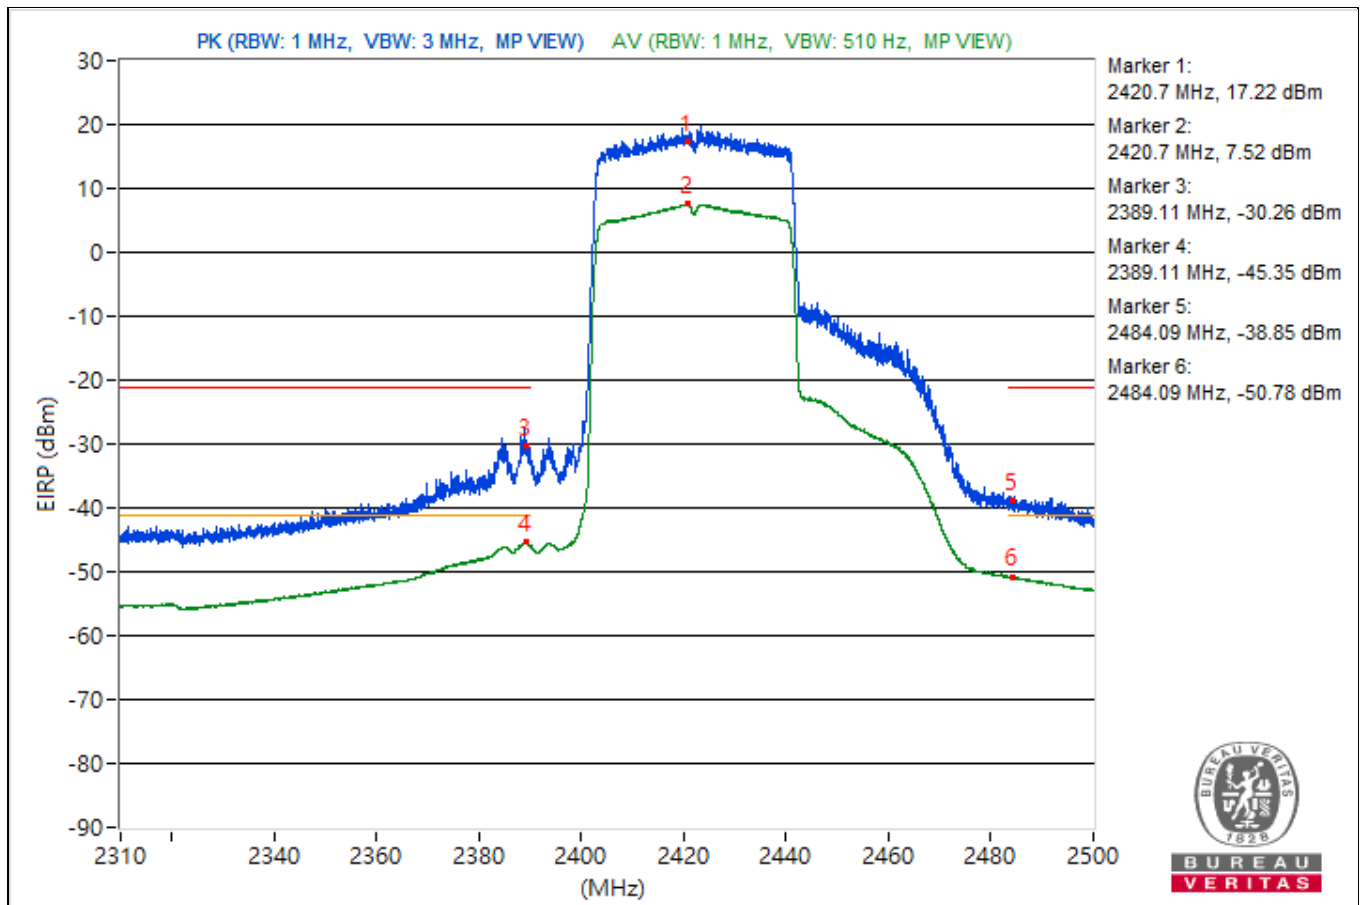


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2435.9	114.67 PK			13.56	12.86	3.18	19.41
2	*2435.9	103.91 AV			2.23	2.67	3.18	8.65
3	2389.97	65.02 PK	74	-8.98	-34.33	-40.65	3.18	-30.24
4	2389.97	50.42 AV	54	-3.58	-49.54	-53.32	3.18	-44.84
5	2483.52	65.03 PK	74	-8.97	-35.4	-37.77	3.18	-30.23
6	2483.52	49.85 AV	54	-4.15	-52.01	-51.22	3.18	-45.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

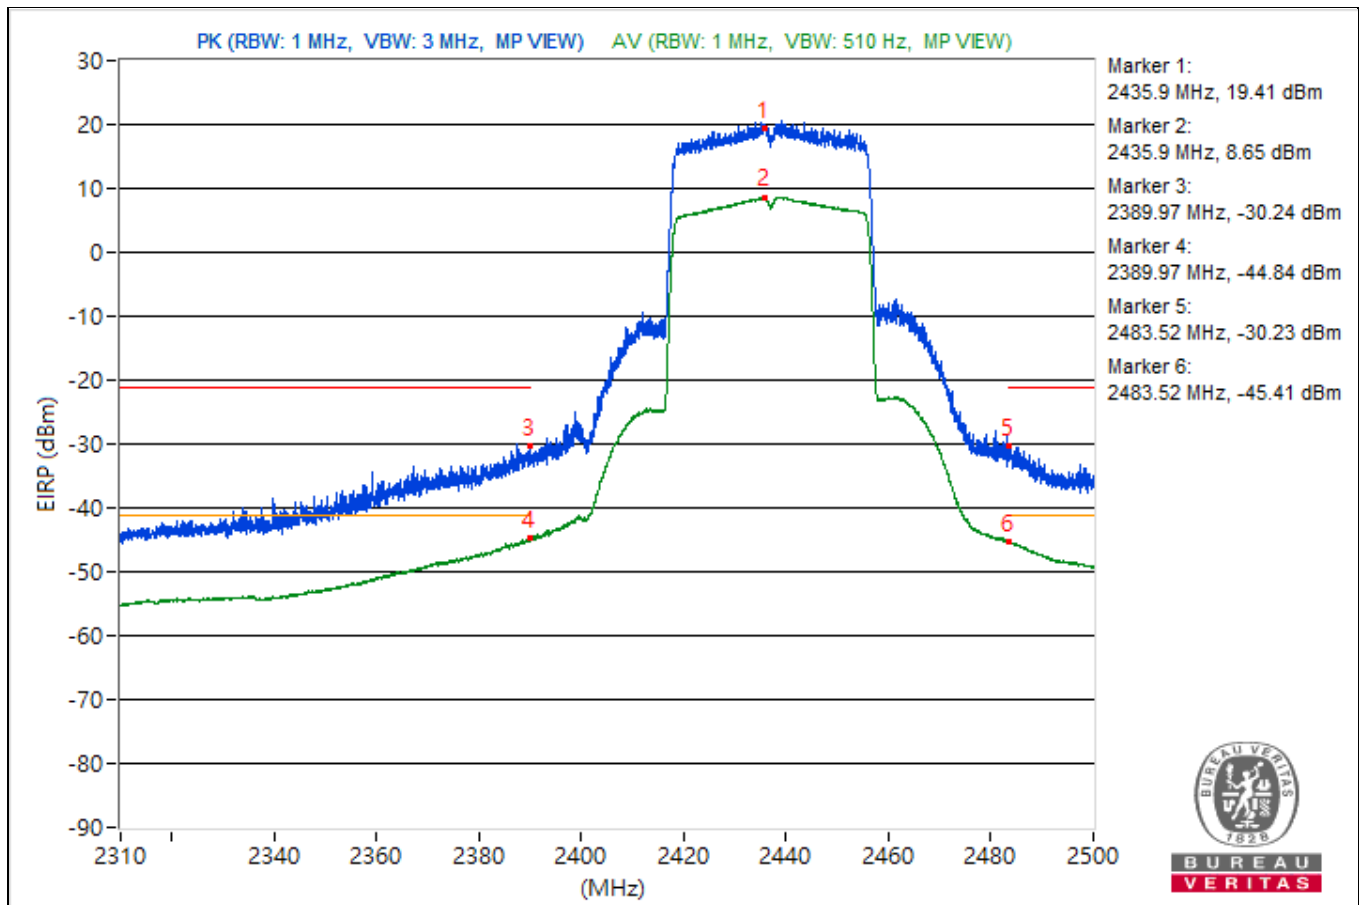


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 55% RH
Tested By	Henry HSU		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2453.57	113.1 PK			11.47	11.82	3.18	17.84
2	*2453.57	102.72 AV			1.39	1.15	3.18	7.46
3	2389.85	55.94 PK	74	-18.06	-45.78	-45.26	3.18	-39.32
4	2389.85	44.15 AV	54	-9.85	-57.23	-57.38	3.18	-51.11
5	2485.42	68.4 PK	74	-5.6	-33.59	-32.57	3.18	-26.86
6	2485.42	53.62 AV	54	-0.38	-47.83	-47.83	3.18	-41.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

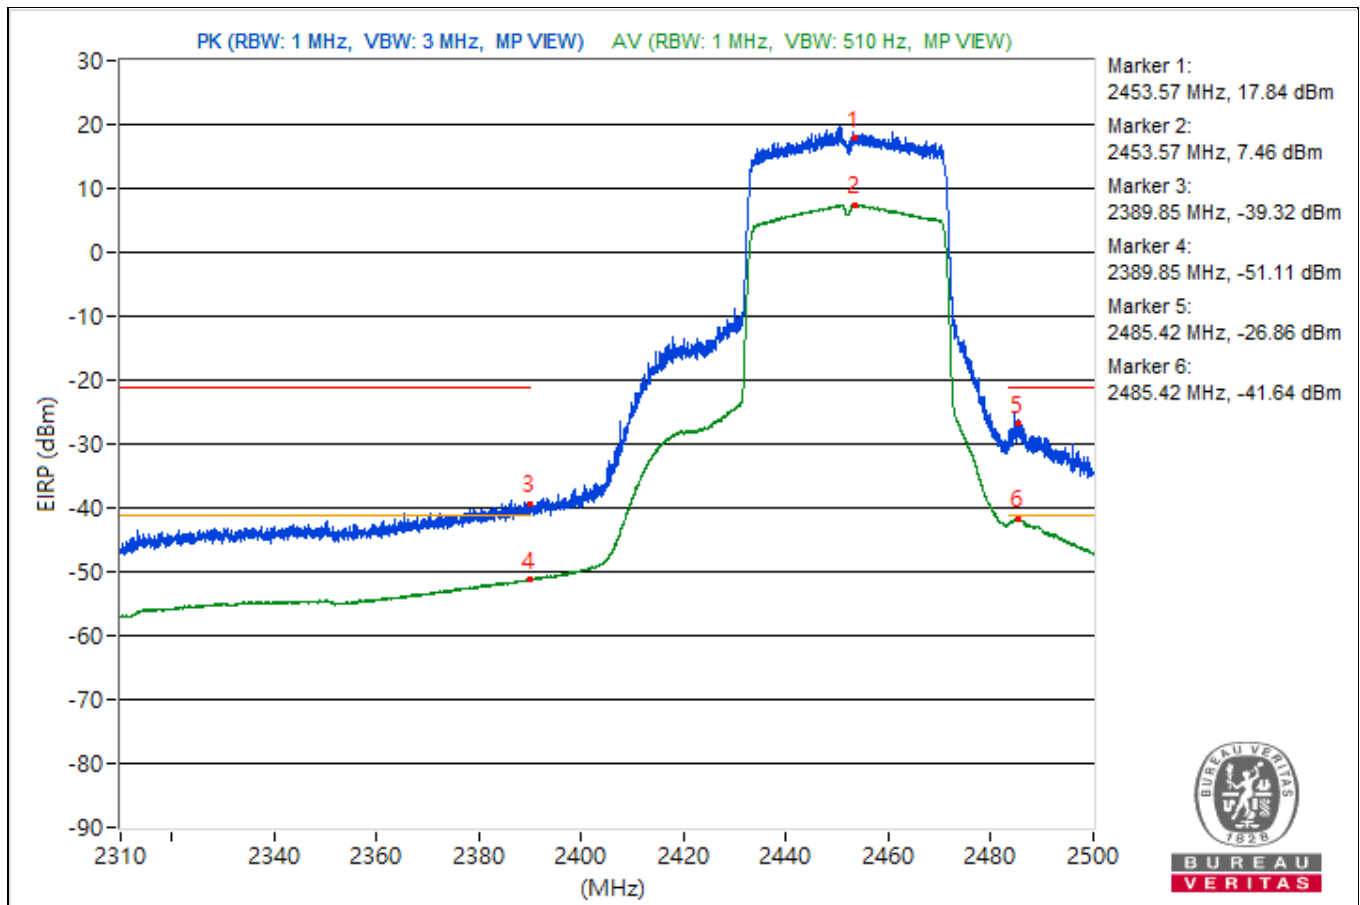


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2458.96	113.65 PK			12.29	12.1	3.18	18.39
2	*2458.96	102.42 AV			0.86	1.07	3.18	7.16
3	2389.94	55.53 PK	74	-18.47	-45.66	-46.21	3.18	-39.73
4	2389.94	43.54 AV	54	-10.46	-57.51	-58.35	3.18	-51.72
5	2485.16	63.75 PK	74	-10.25	-38.19	-37.27	3.18	-31.51
6	2485.16	51.41 AV	54	-2.59	-51.83	-48.77	3.18	-43.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

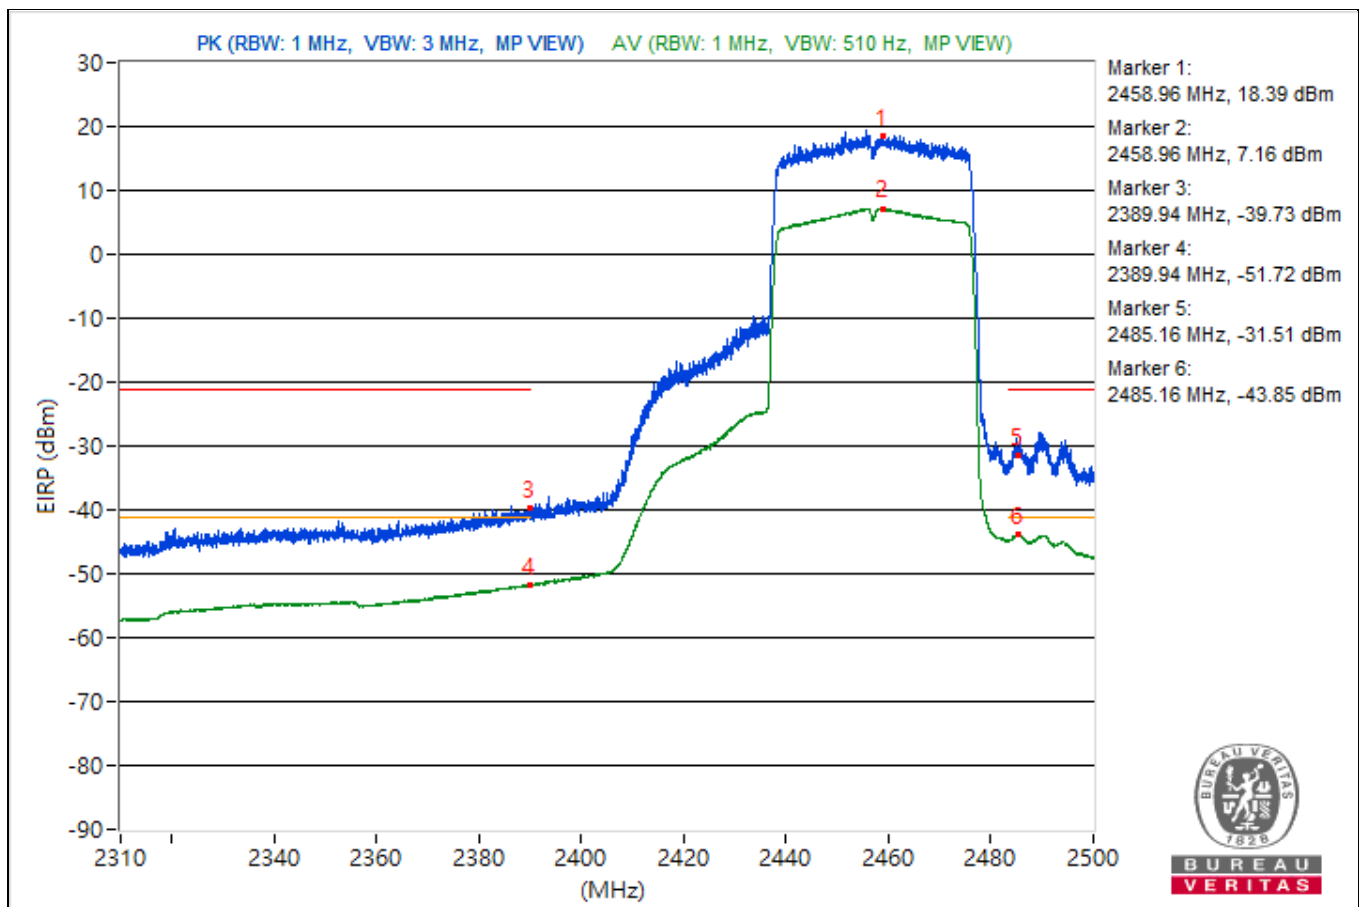


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Henry Hsu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2460.79	110.69 PK			9.8	8.6	3.18	15.43
2	*2460.79	100.95 AV			-0.42	-0.58	3.18	5.69
3	2389.89	52.8 PK	74	-21.2	-49.62	-47.86	3.18	-42.46
4	2389.89	42.32 AV	54	-11.68	-59.01	-59.24	3.18	-52.94
5	2483.52	61.25 PK	74	-12.75	-39.86	-40.57	3.18	-34.01
6	2483.52	48.32 AV	54	-5.68	-53.03	-53.22	3.18	-46.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

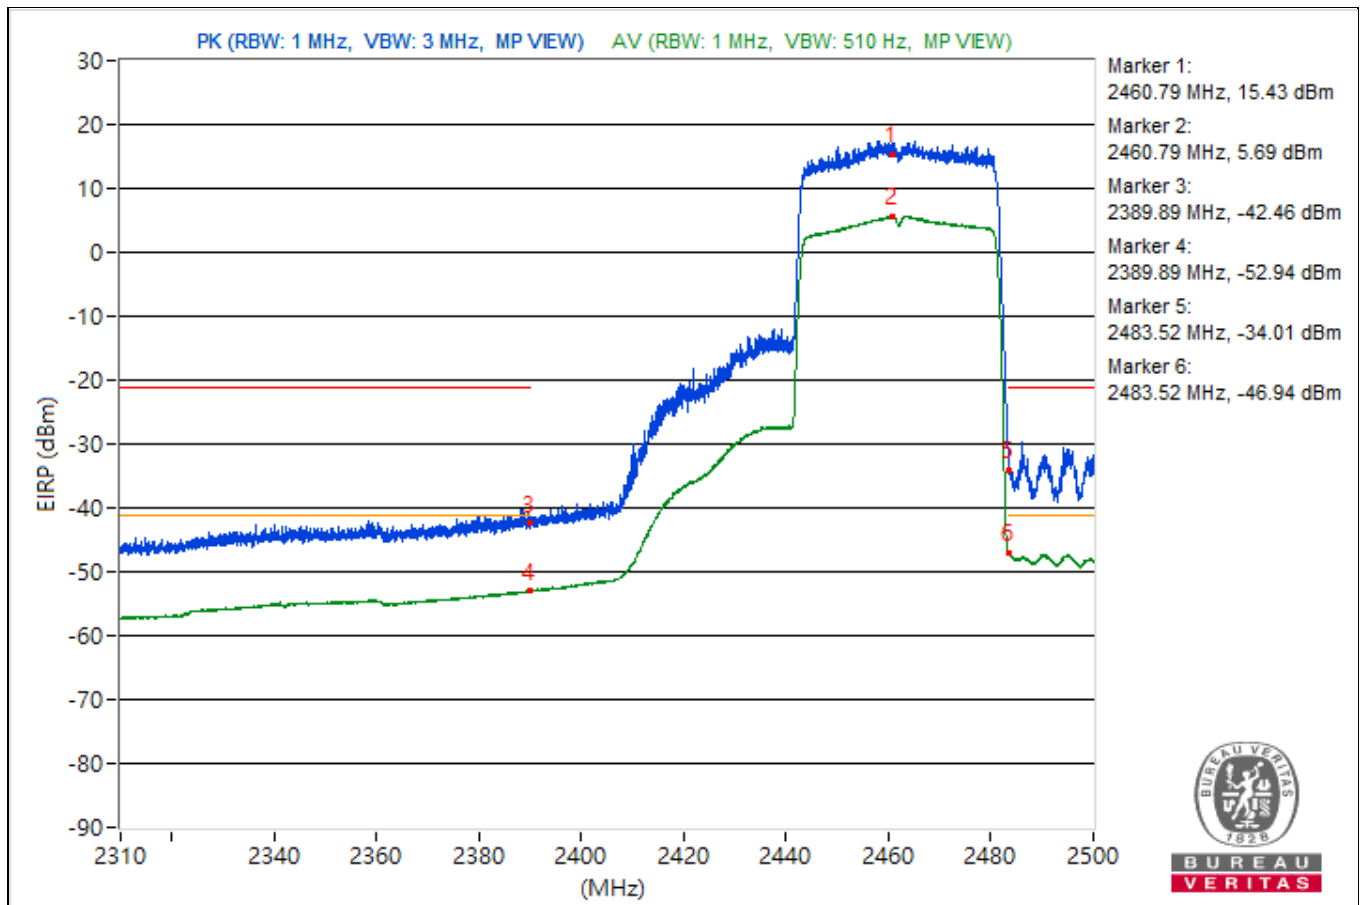


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2403.5	125.14 PK			23.73	23.65	3.18	29.88
2	*2403.5	114.81 AV			13.64	13.06	3.18	19.55
3	2386.81	65.26 PK	74	-8.74	-36.11	-36.27	3.18	-30
4	2386.81	50.13 AV	54	-3.87	-51.25	-51.39	3.18	-45.13
5	2483.68	55.53 PK	74	-18.47	-46.13	-45.71	3.18	-39.73
6	2483.68	43.94 AV	54	-10.06	-57.55	-57.47	3.18	-51.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

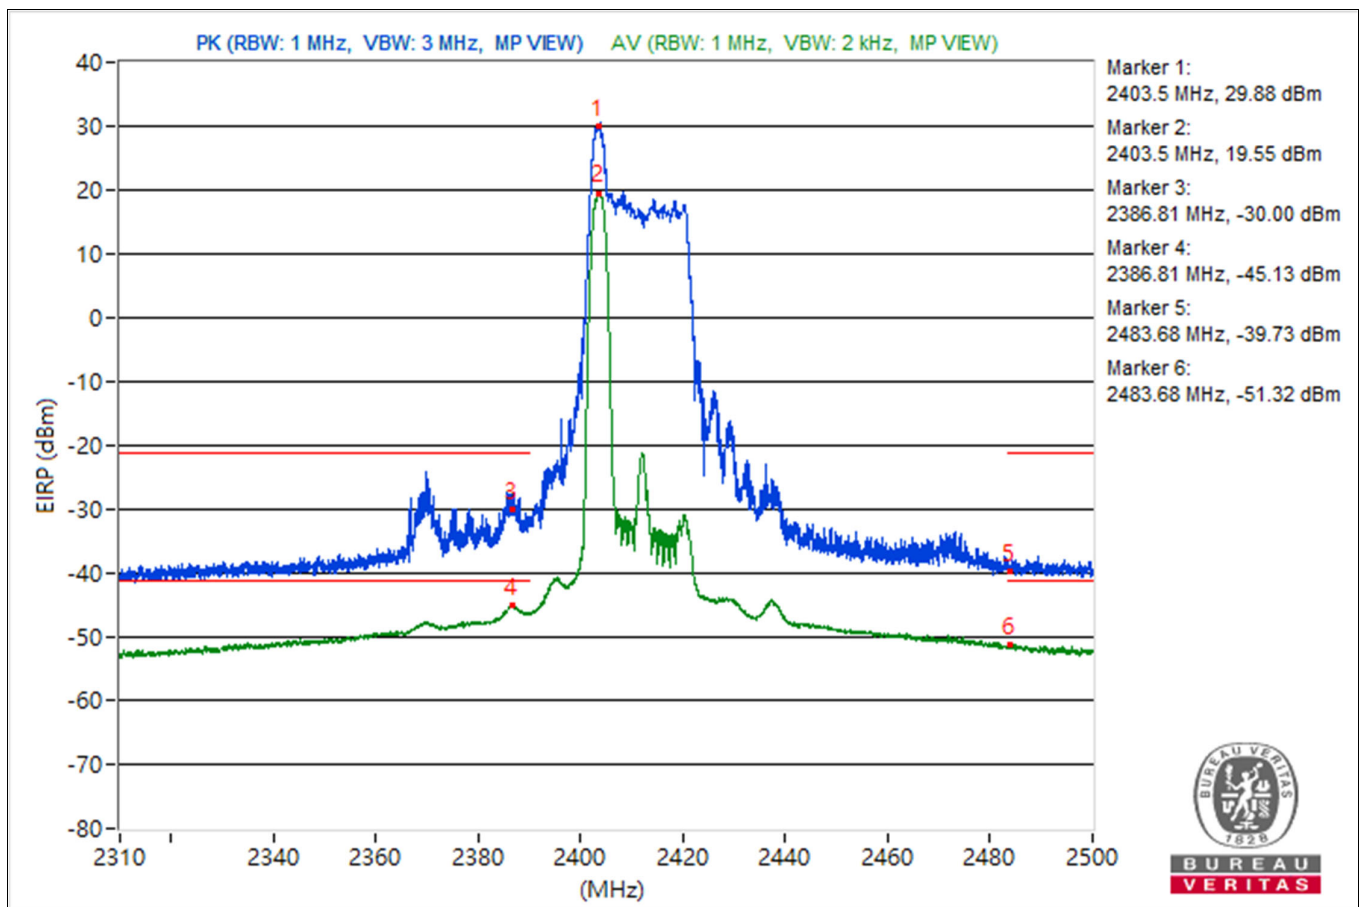


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2428.44	126.68 PK			25.08	25.37	3.18	31.42
2	*2428.44	119.08 AV			17.57	17.69	3.18	23.82
3	2389.89	69.5 PK	74	-4.5	-36.21	-29.84	3.18	-25.76
4	2389.89	48.88 AV	54	-5.12	-52.74	-52.4	3.18	-46.38
5	2484.02	66.04 PK	74	-7.96	-35.98	-34.91	3.18	-29.22
6	2484.02	48.03 AV	54	-5.97	-54.15	-52.8	3.18	-47.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

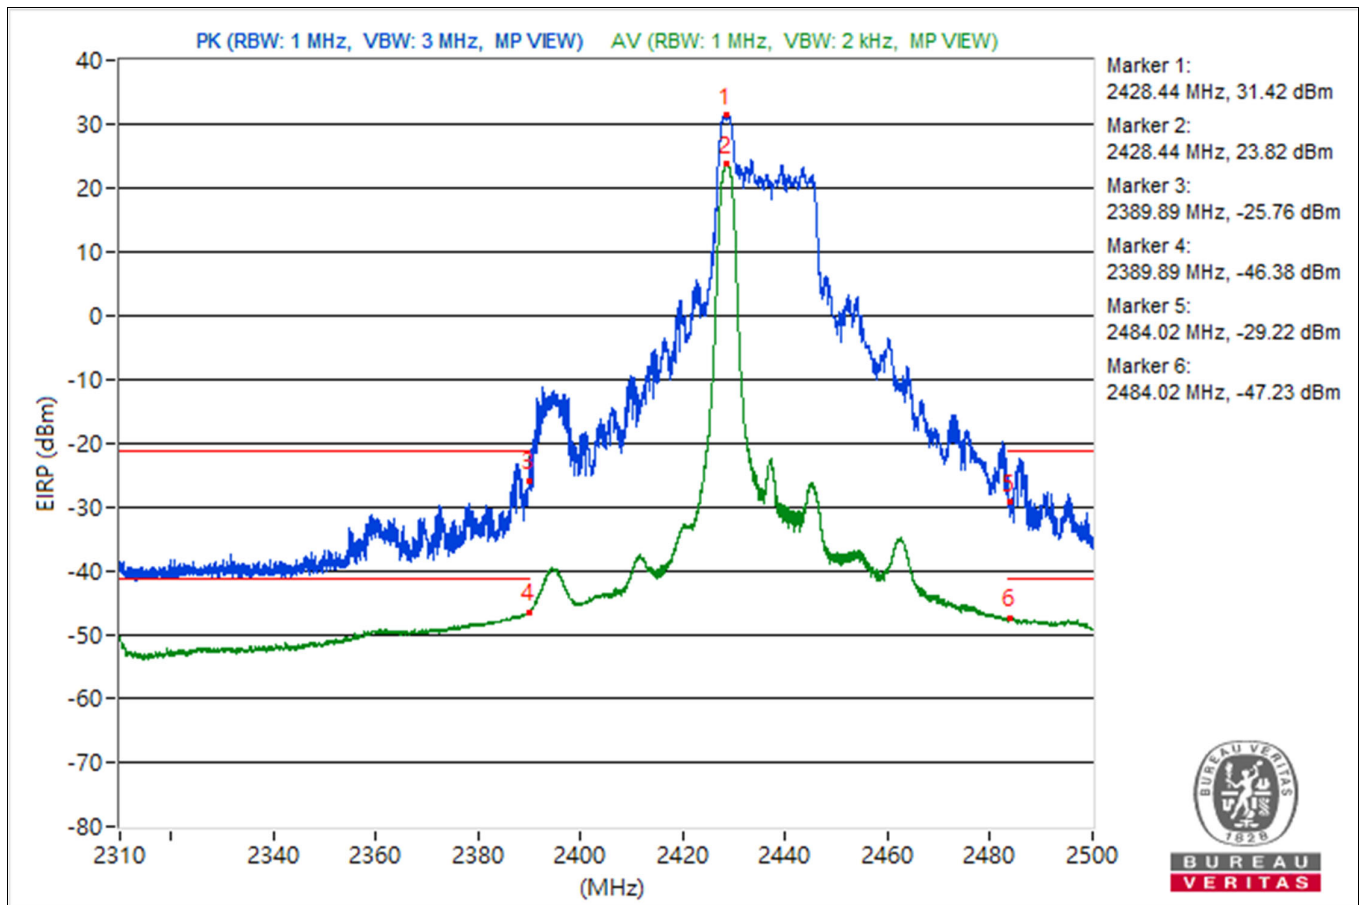


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.34	124.52 PK			23.23	22.91	3.18	29.26
2	*2470.34	115.88 AV			14.53	14.32	3.18	20.62
3	2350.66	57.91 PK	74	-16.09	-43.87	-43.23	3.18	-37.35
4	2350.66	48.64 AV	54	-5.36	-52.79	-52.82	3.18	-46.62
5	2486.96	68.77 PK	74	-5.23	-31.32	-34.65	3.18	-26.49
6	2486.96	52.28 AV	54	-1.72	-48.94	-49.41	3.18	-42.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

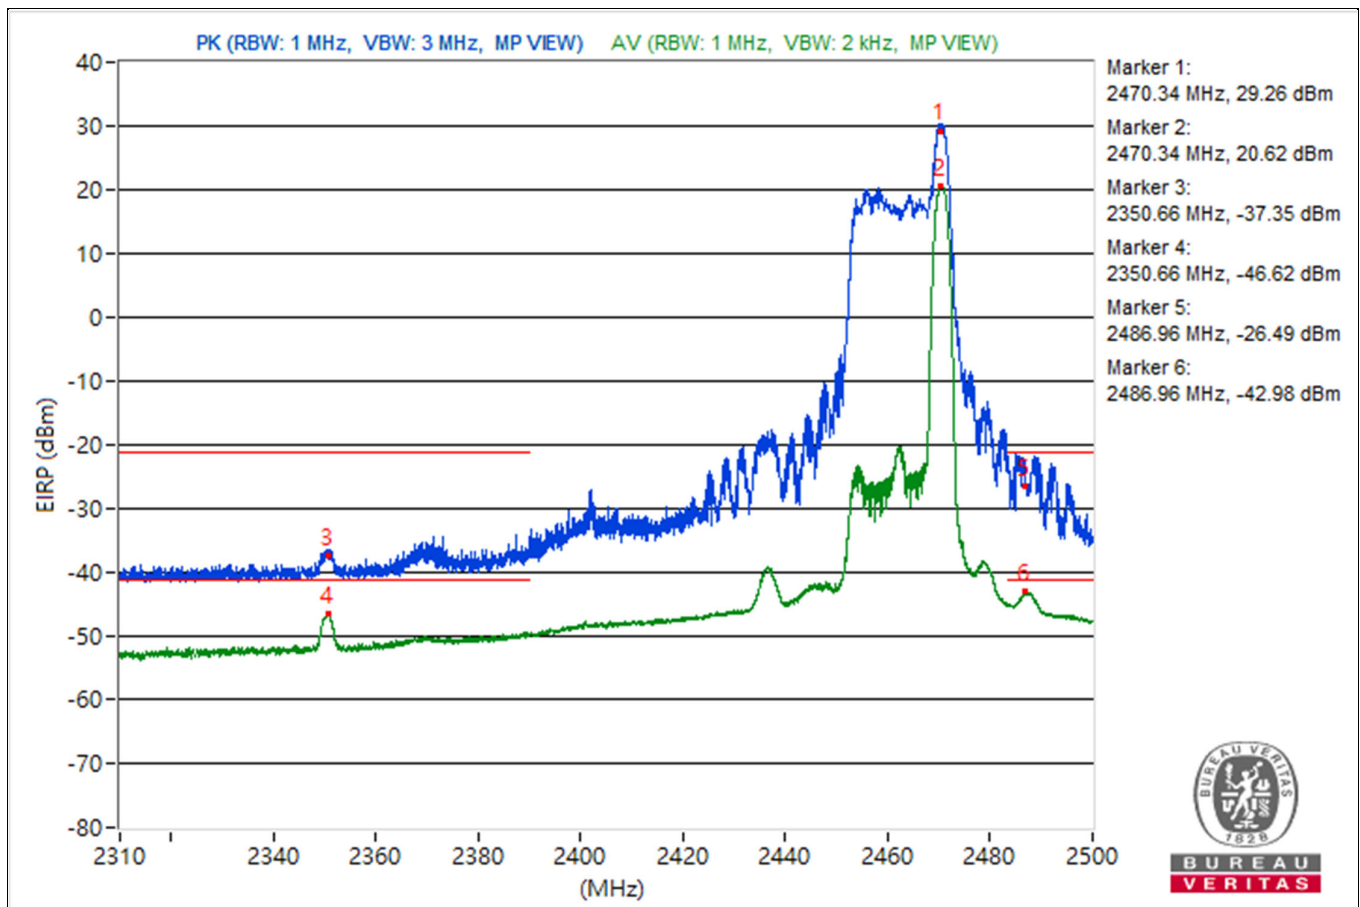


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.44	123.78 PK			22.99	21.54	3.18	28.52
2	*2475.44	113.86 AV			12.64	12.16	3.18	18.6
3	2355.55	58.32 PK	74	-15.68	-42.51	-43.86	3.18	-36.94
4	2355.55	48.2 AV	54	-5.8	-52.92	-53.59	3.18	-47.06
5	2483.71	69.8 PK	74	-4.2	-32.29	-31.1	3.18	-25.46
6	2483.71	53.77 AV	54	-0.23	-49.13	-46.6	3.18	-41.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

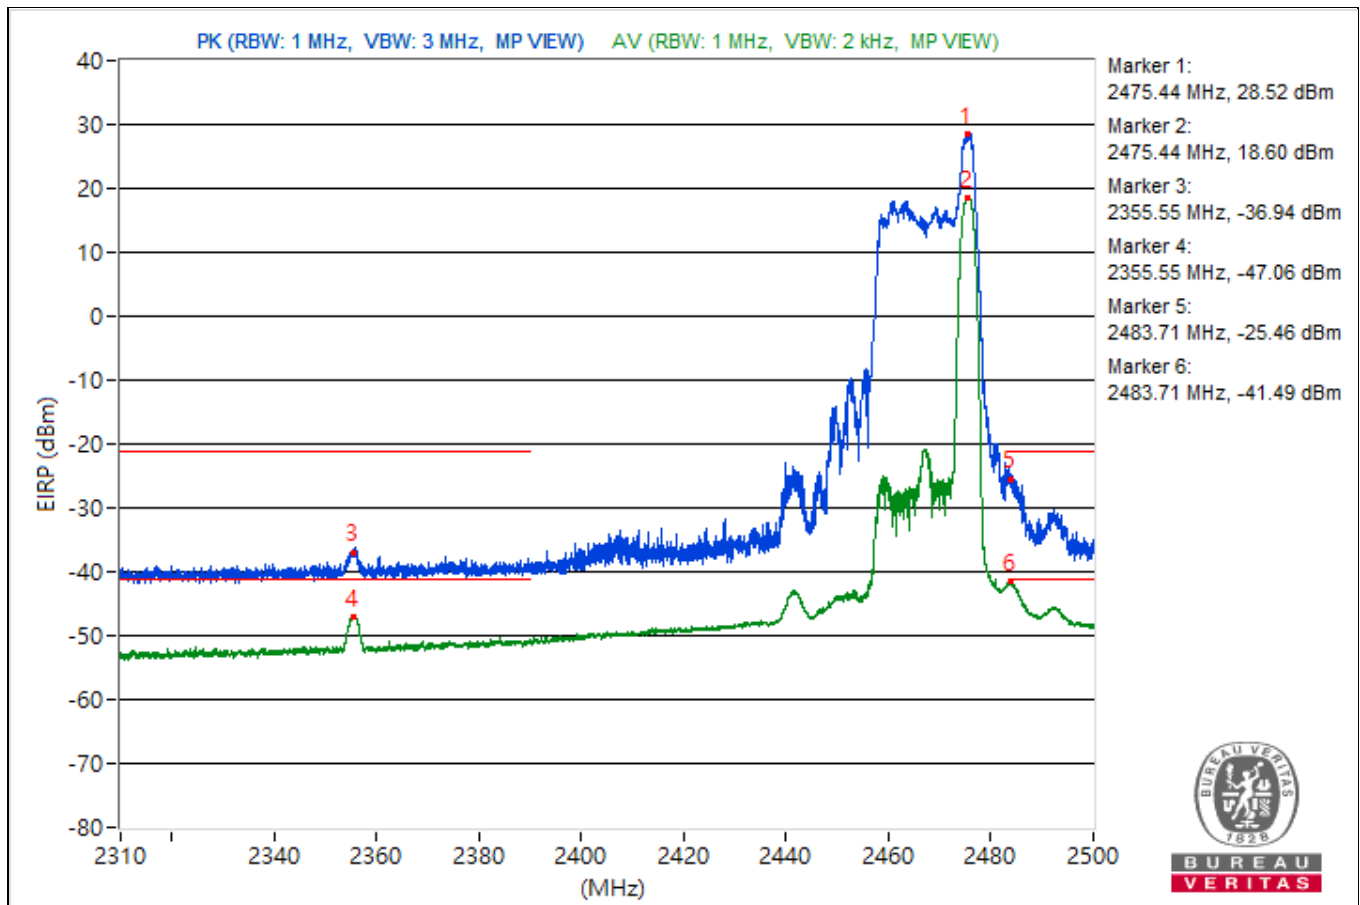


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 66% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2480.41	113.2 PK			11.54	11.94	3.18	17.94
2	*2480.41	103.4 AV			2.28	1.59	3.18	8.14
3	2361.32	60.53 PK	74	-13.47	-40.61	-41.25	3.18	-34.73
4	2361.32	48 AV	54	-6	-54.48	-52.61	3.18	-47.26
5	2483.52	71.57 PK	74	-2.43	-29.64	-30.13	3.18	-23.69
6	2483.52	53.94 AV	54	-0.06	-47.05	-48.02	3.18	-41.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

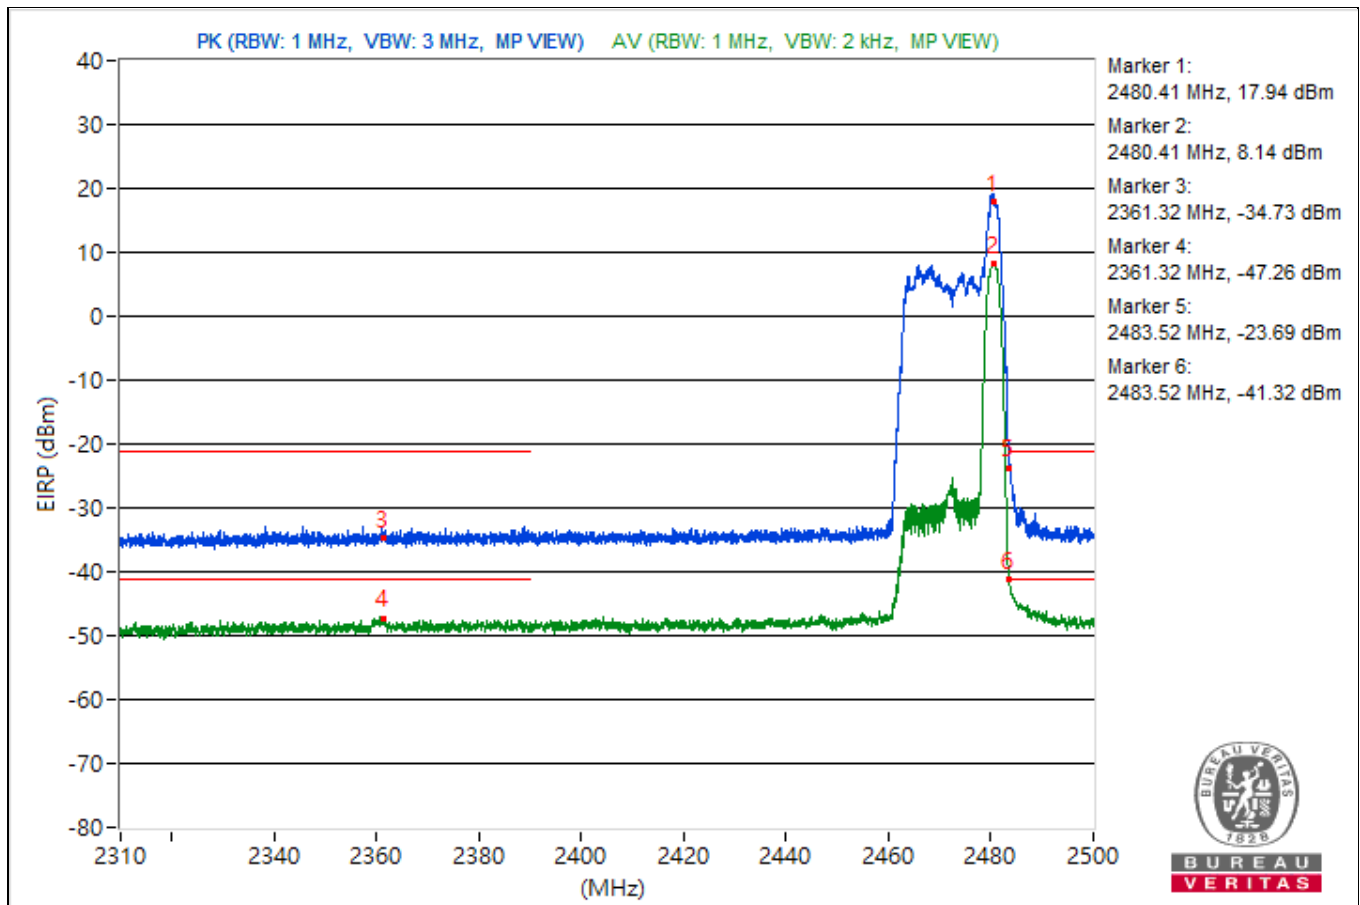


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2403.79	123.04 PK			20.02	22.75	3.18	27.78
2	*2403.79	112.41 AV			11.1	10.81	3.18	17.15
3	2389.73	64.12 PK	74	-9.88	-37.03	-37.66	3.18	-31.14
4	2389.73	50.54 AV	54	-3.46	-51.31	-50.55	3.18	-44.72
5	2488.24	55.45 PK	74	-18.55	-45.89	-46.11	3.18	-39.81
6	2488.24	44.9 AV	54	-9.1	-56.64	-56.47	3.18	-50.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

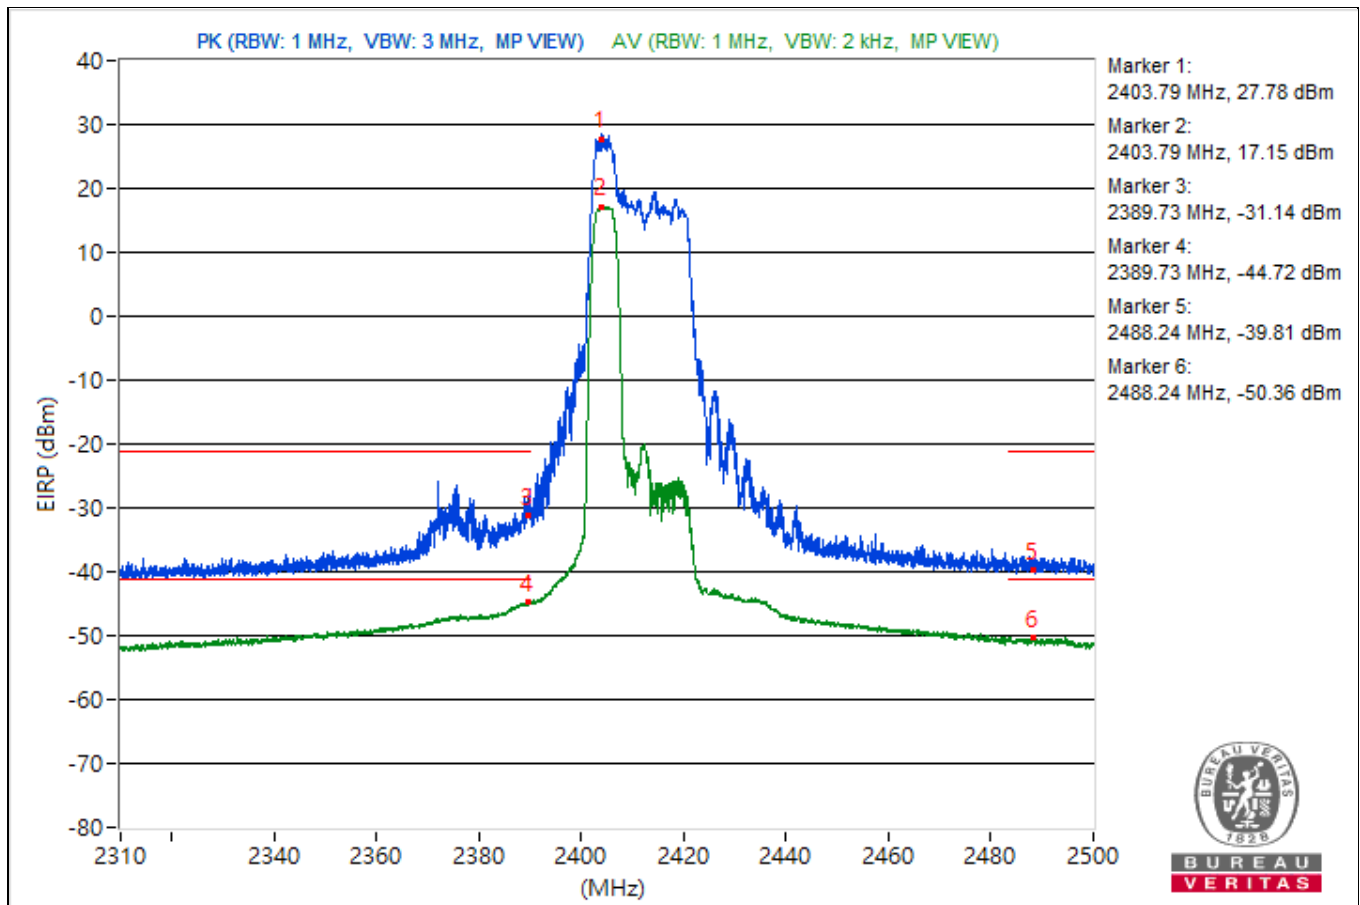


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2430.15	124.99 PK			23.13	23.91	3.18	29.73
2	*2430.15	116.47 AV			14.88	15.16	3.18	21.21
3	2389.97	67.32 PK	74	-6.68	-33.01	-35.64	3.18	-27.94
4	2389.97	48.21 AV	54	-5.79	-53.34	-53.14	3.18	-47.05
5	2484.49	64.59 PK	74	-9.41	-38.74	-35.55	3.18	-30.67
6	2484.49	48.4 AV	54	-5.6	-53.37	-52.75	3.18	-46.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

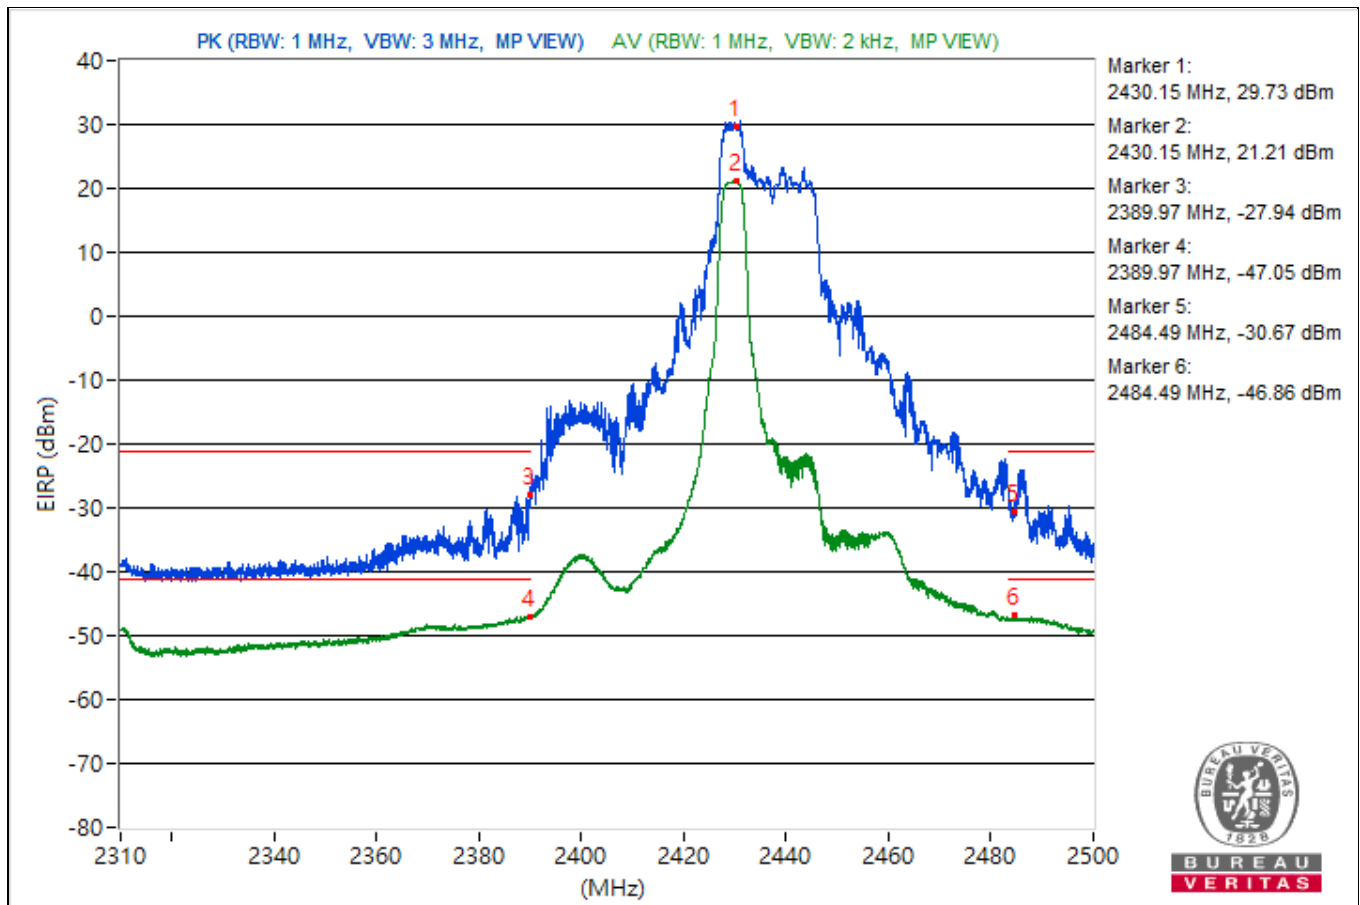


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.62	119.48 PK			21.04	-30.56	3.18	24.22
2	*2470.62	110.15 AV			11.71	-39.76	3.18	14.89
3	2350.26	55.81 PK	74	-18.19	-44.4	-47.38	3.18	-39.45
4	2350.26	45.22 AV	54	-8.78	-54.11	-60.59	3.18	-50.04
5	2483.97	62.25 PK	74	-11.75	-36.59	-46.78	3.18	-33.01
6	2483.97	48.15 AV	54	-5.85	-50.78	-59.95	3.18	-47.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

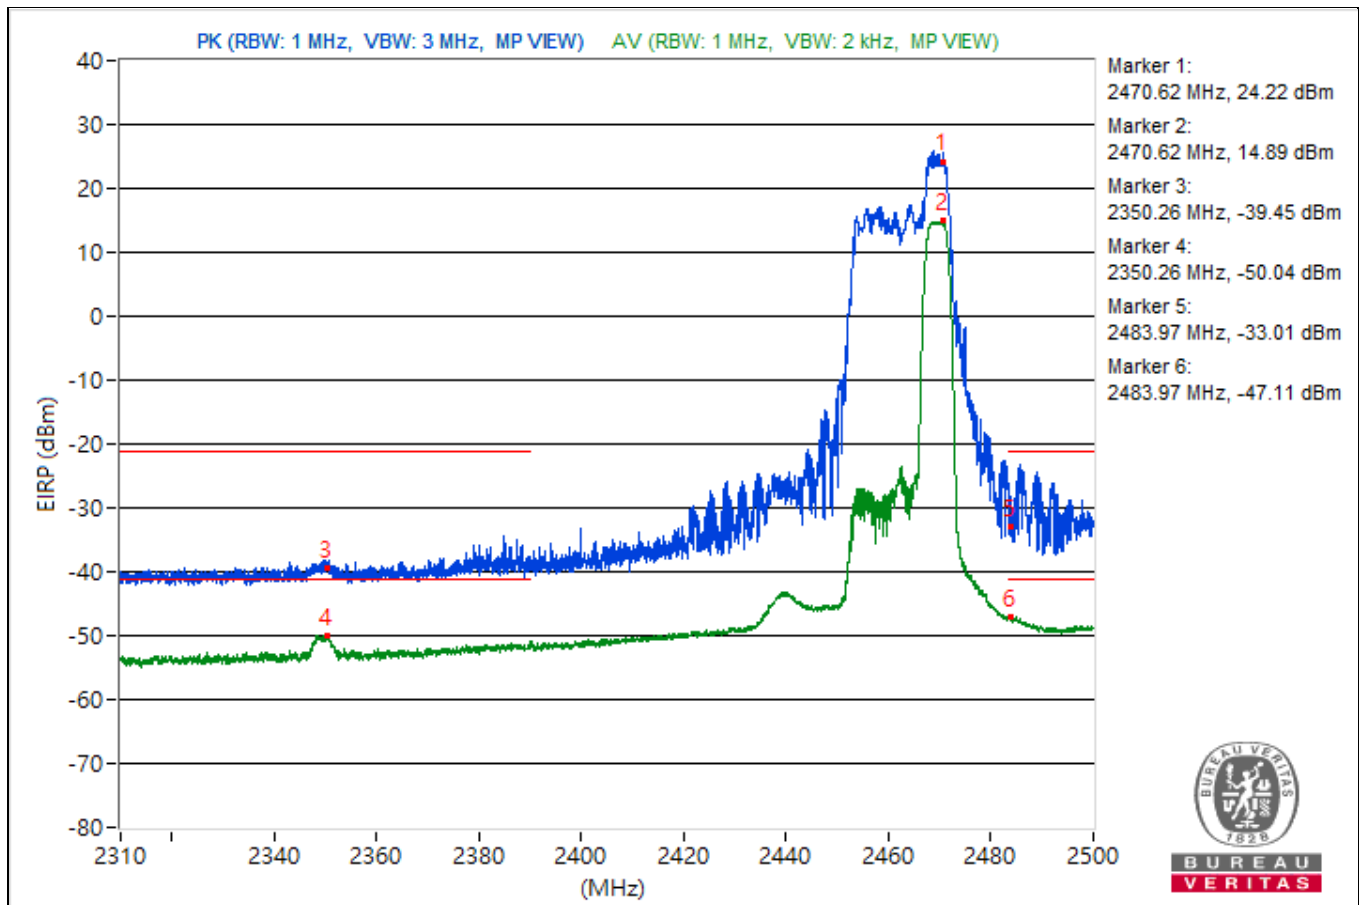


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.04	121.99 PK			19.81	21.17	3.18	26.73
2	*2475.04	112.04 AV			10.6	10.57	3.18	16.78
3	2355.53	56.81 PK	74	-17.19	-45.34	-44.03	3.18	-38.45
4	2355.53	47.14 AV	54	-6.86	-54.41	-54.21	3.18	-48.12
5	2483.52	68.78 PK	74	-5.22	-32.74	-32.59	3.18	-26.48
6	2483.52	53.58 AV	54	-0.42	-48.93	-47.02	3.18	-41.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

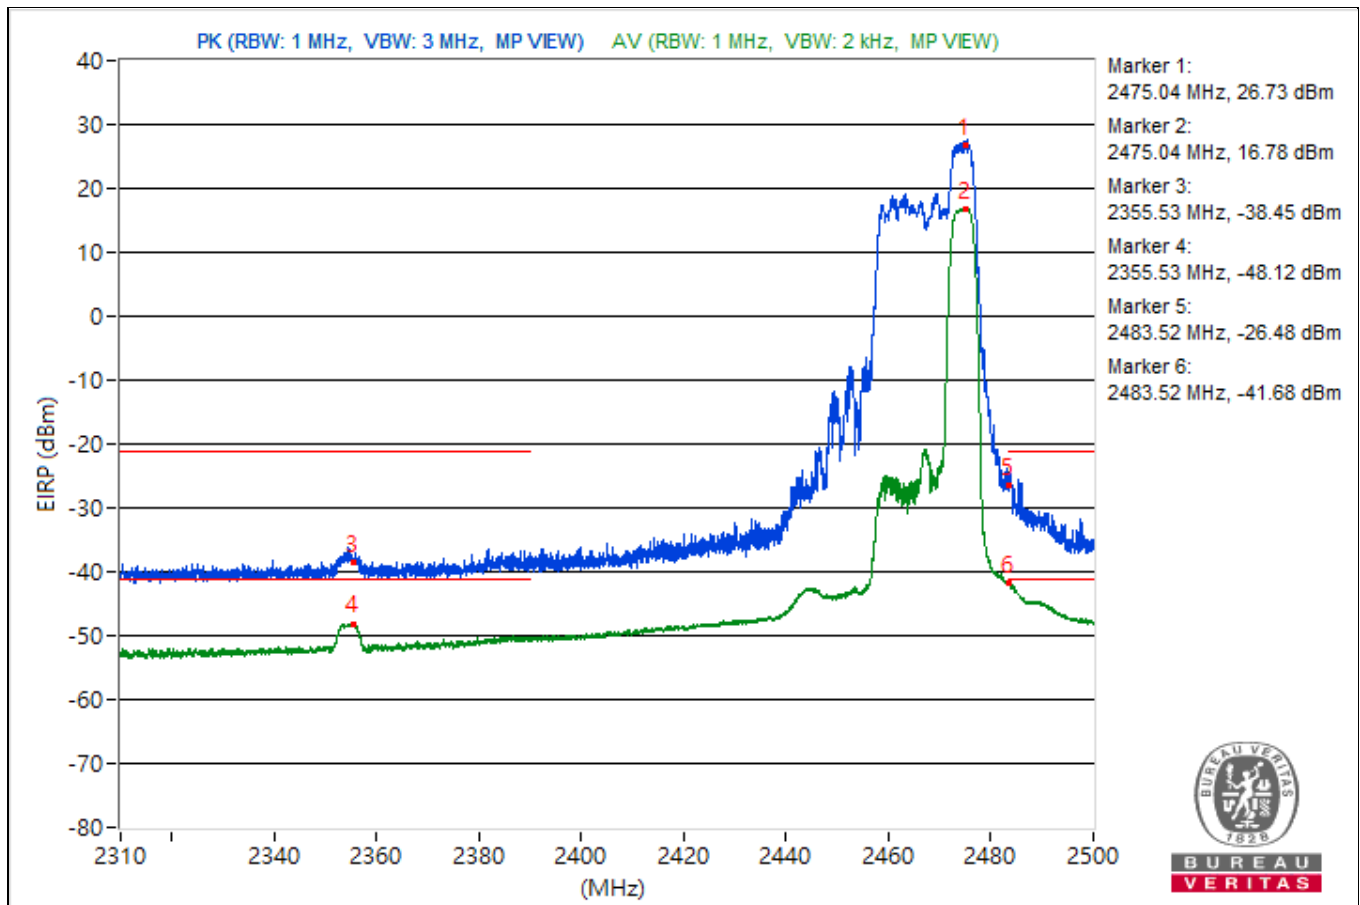


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2479.41	112.02 PK			10.82	10.31	3.18	16.76
2	*2479.41	100.8 AV			-0.66	-0.65	3.18	5.54
3	2359.02	55.17 PK	74	-18.83	-45.79	-46.84	3.18	-40.09
4	2359.02	43.82 AV	54	-10.18	-57.03	-58.32	3.18	-51.44
5	2483.52	69.01 PK	74	-4.99	-32.78	-32.13	3.18	-26.25
6	2483.52	53.03 AV	54	-0.97	-48.07	-48.81	3.18	-42.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

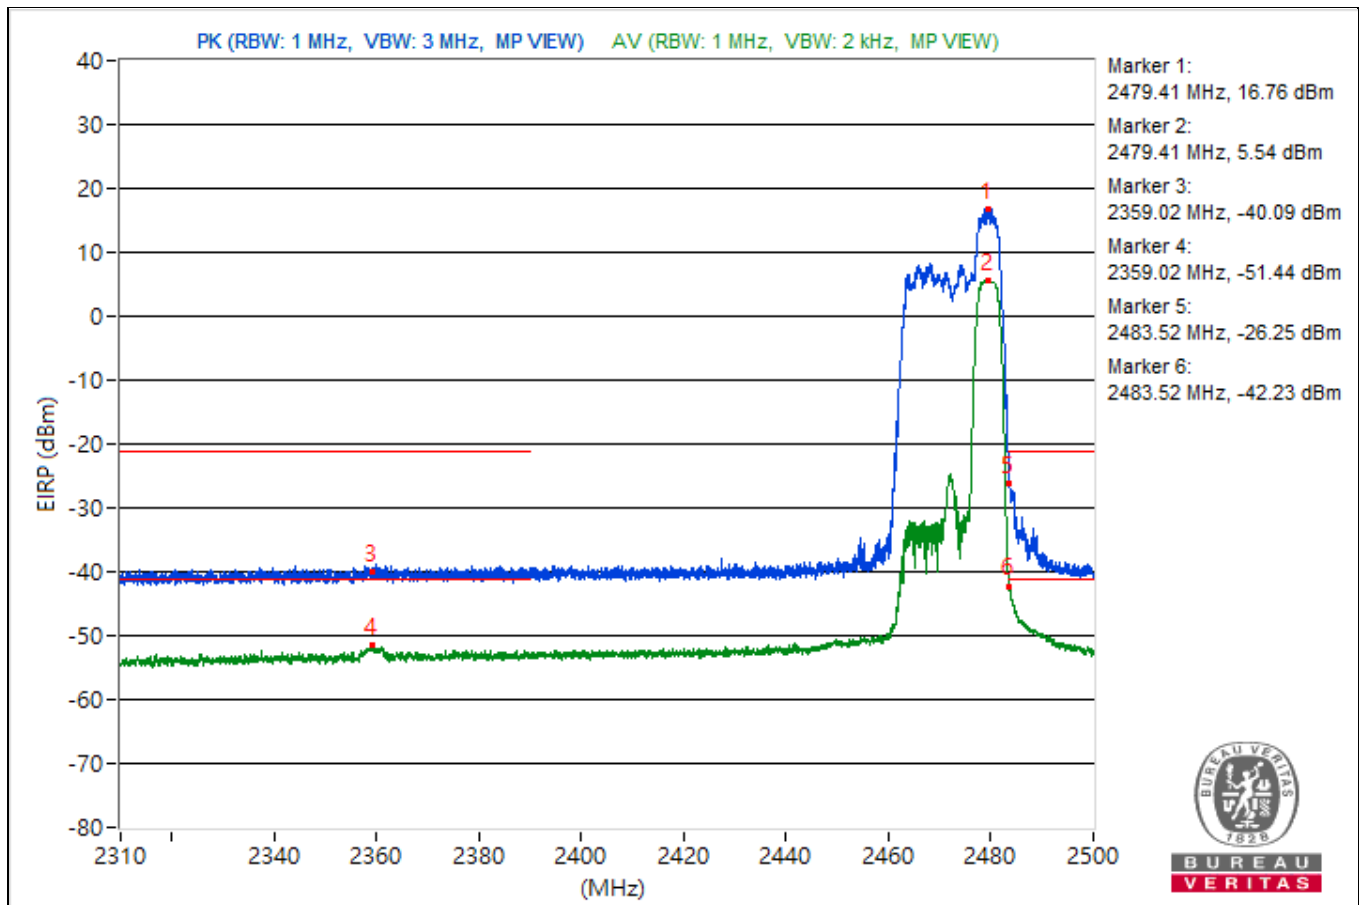


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2404.38	118.96 PK			17.66	17.35	3.18	23.7
2	*2404.38	108.93 AV			7.51	7.44	3.18	13.67
3	2389.92	63.83 PK	74	-10.17	-39.96	-36.12	3.18	-31.43
4	2389.92	50.17 AV	54	-3.83	-51.37	-51.2	3.18	-45.09
5	2484.18	56.85 PK	74	-17.15	-45.49	-43.85	3.18	-38.41
6	2484.18	44.81 AV	54	-9.19	-56.88	-56.42	3.18	-50.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

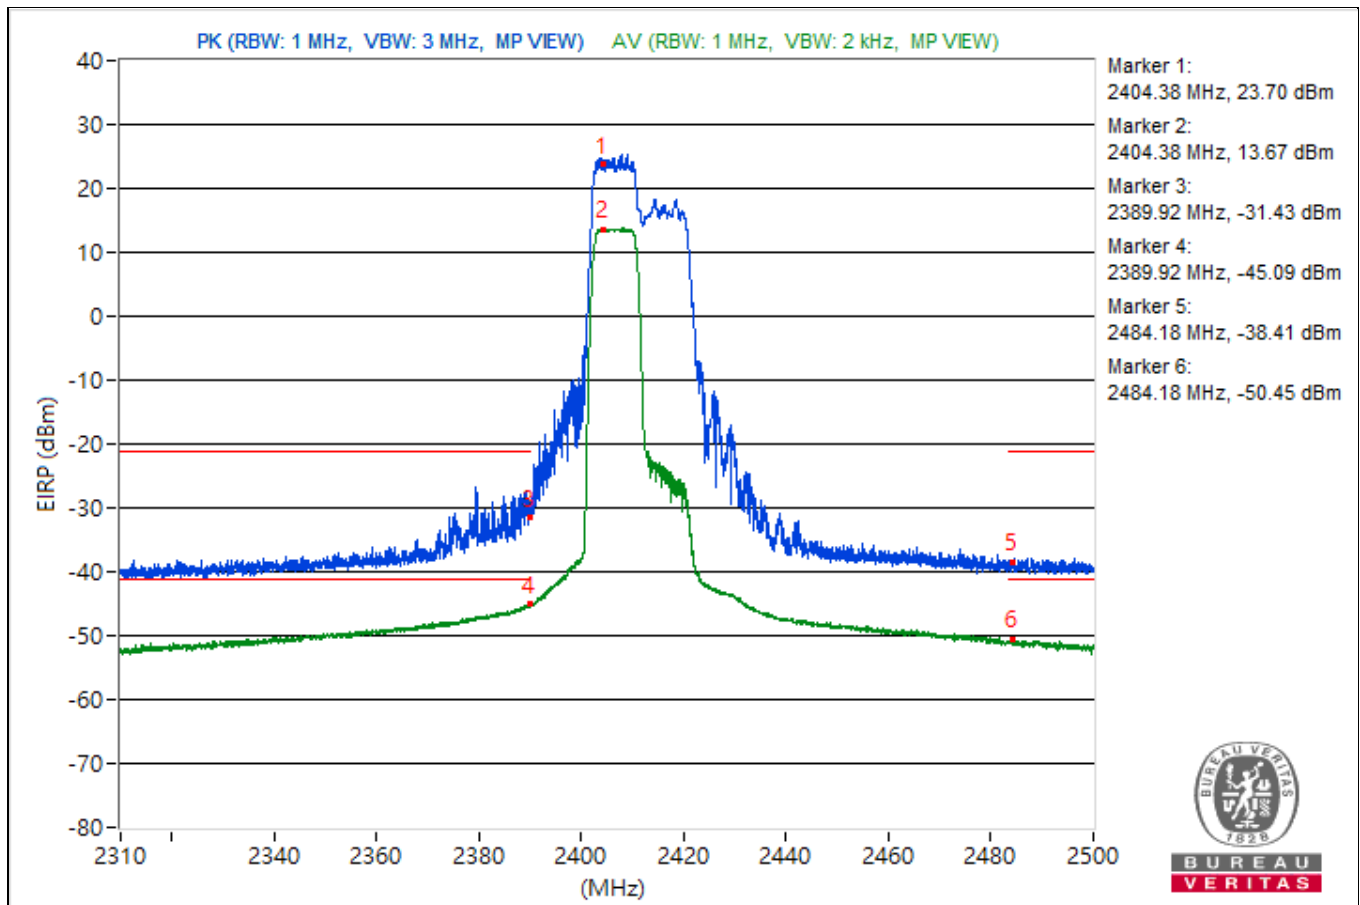


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2432.12	122.35 PK			20.81	20.99	3.18	27.09
2	*2432.12	112.91 AV			11.22	11.7	3.18	17.65
3	2387.88	69.24 PK	74	-4.76	-35.24	-30.45	3.18	-26.02
4	2387.88	50.03 AV	54	-3.97	-52.85	-50.35	3.18	-45.23
5	2484.35	63.23 PK	74	-10.77	-37.55	-39.02	3.18	-32.03
6	2484.35	49.8 AV	54	-4.2	-52.15	-51.2	3.18	-45.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

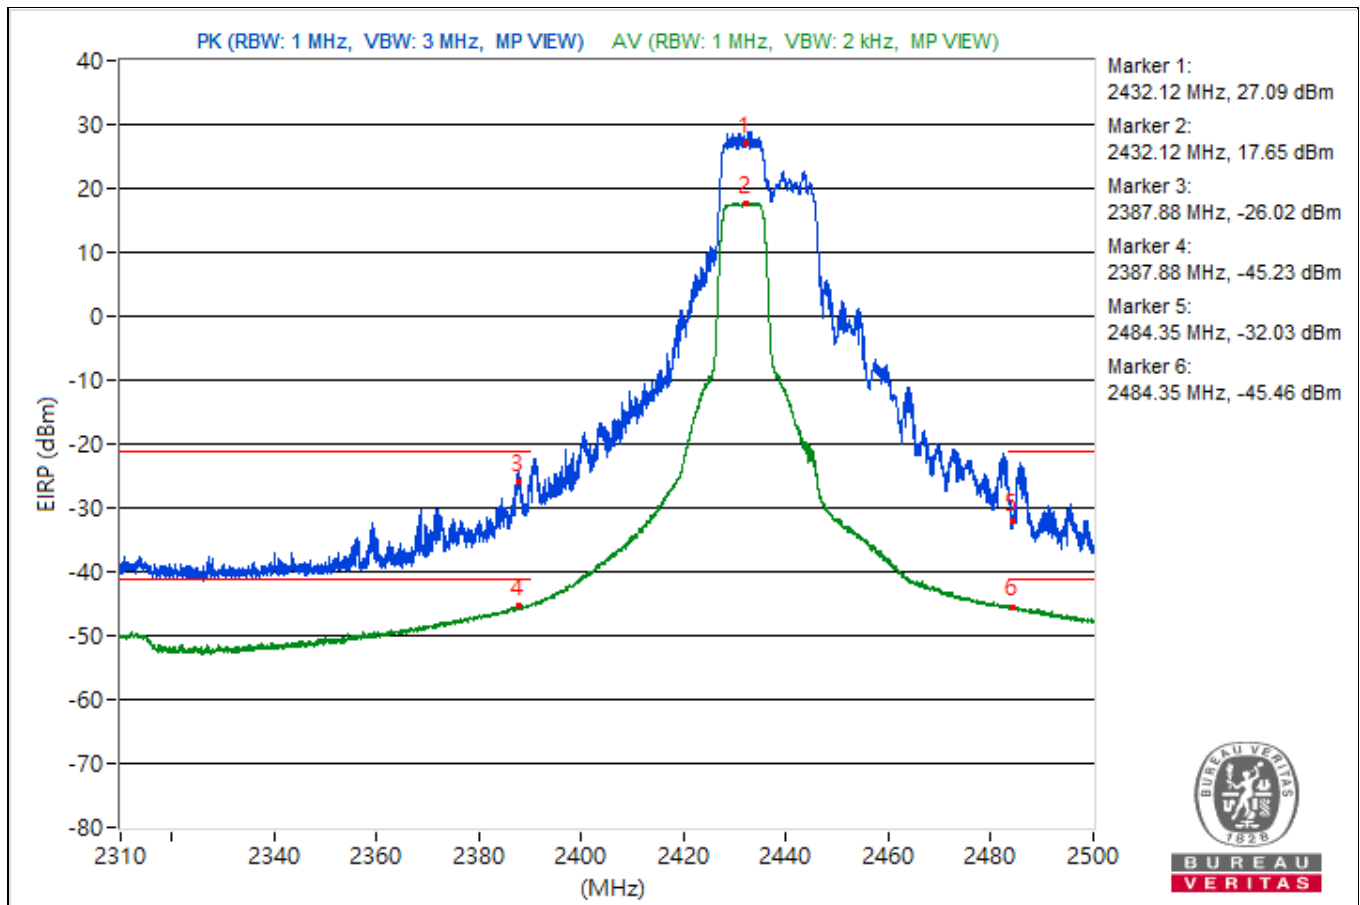


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2469.48	119.2 PK			17.73	17.78	3.18	23.94
2	*2469.48	109.81 AV			8.74	7.95	3.18	14.55
3	2349.33	56.05 PK	74	-17.95	-45.2	-45.61	3.18	-39.21
4	2349.33	45.84 AV	54	-8.16	-55.46	-55.76	3.18	-49.42
5	2483.71	70.32 PK	74	-3.68	-31.35	-30.93	3.18	-24.94
6	2483.71	52.47 AV	54	-1.53	-49.66	-48.39	3.18	-42.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

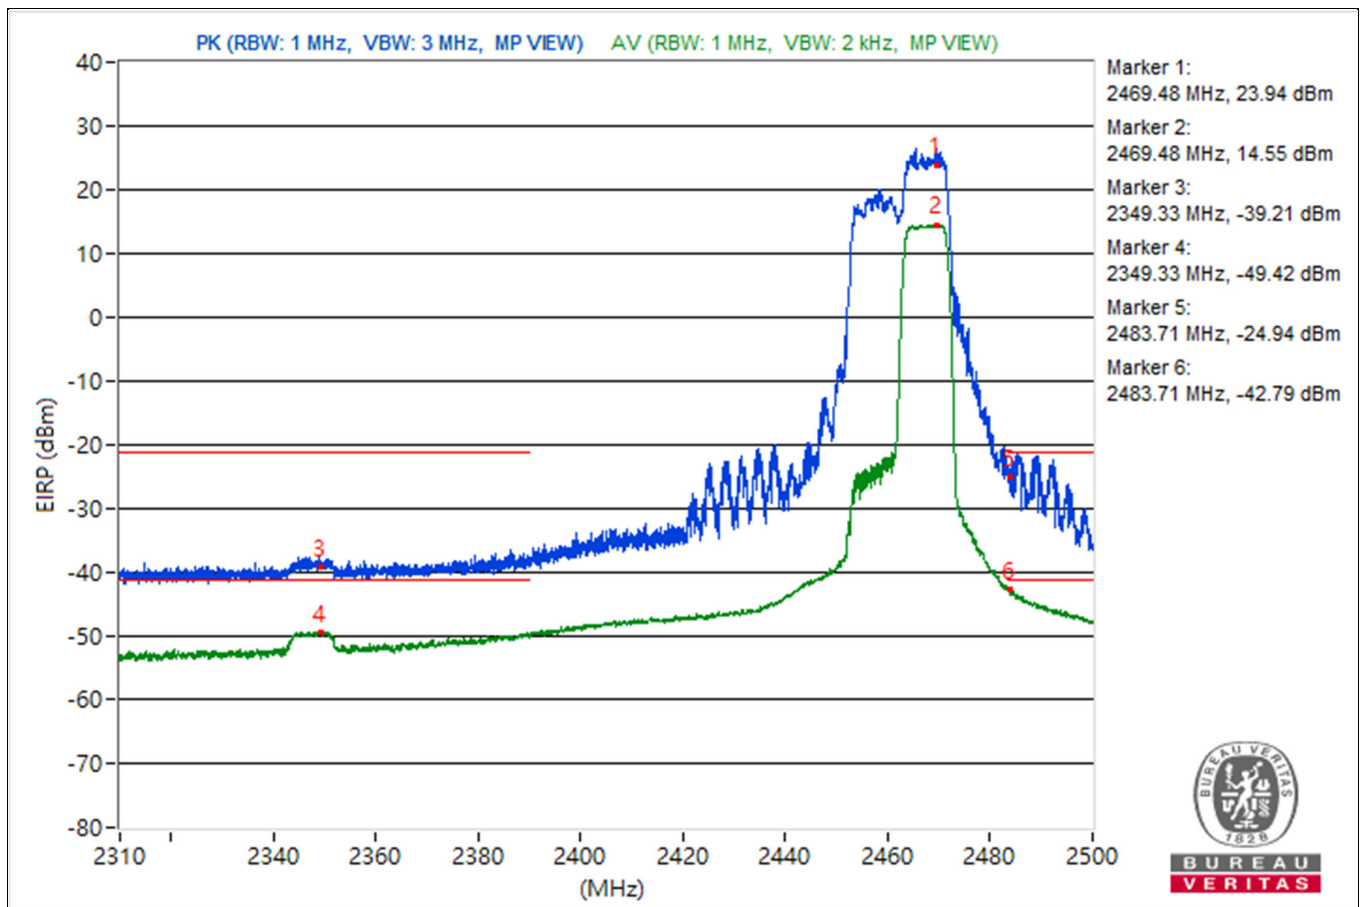


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2474.82	118.69 PK			17.13	17.34	3.18	23.43
2	*2474.82	108.58 AV			7.02	7.23	3.18	13.32
3	2354.82	56.12 PK	74	-17.88	-46.02	-44.73	3.18	-39.14
4	2354.82	45.76 AV	54	-8.24	-55.64	-55.74	3.18	-49.5
5	2483.59	71.07 PK	74	-2.93	-32.33	-29.04	3.18	-24.19
6	2483.59	53.95 AV	54	-0.05	-48.23	-46.88	3.18	-41.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

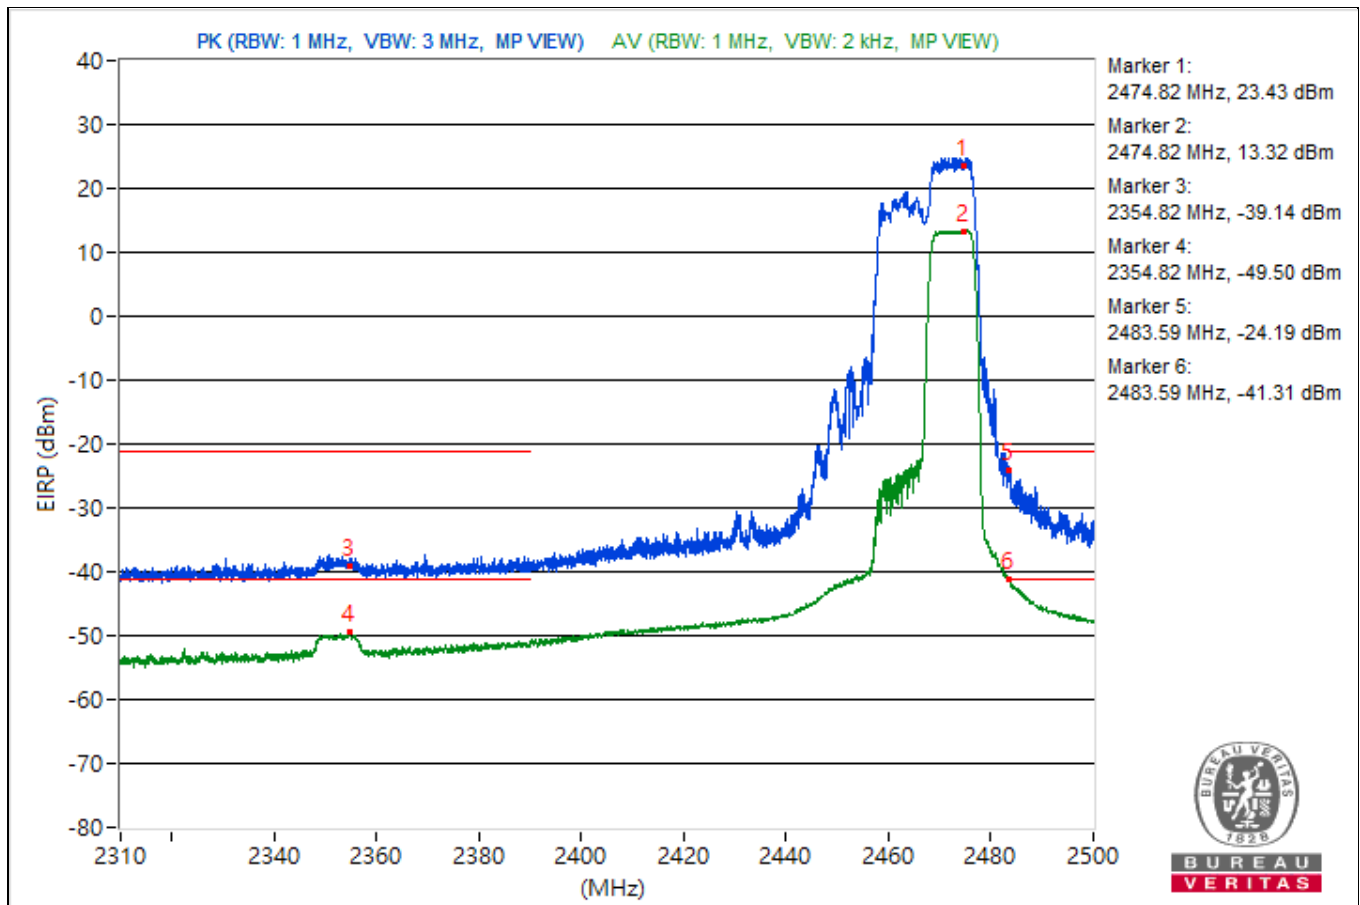


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2476.32	108.91 PK			7.89	6.99	3.18	13.65
2	*2476.32	99.29 AV			-1.94	-2.39	3.18	4.03
3	2358.26	54.69 PK	74	-19.31	-46.2	-47.42	3.18	-40.57
4	2358.26	43.61 AV	54	-10.39	-59.21	-56.81	3.18	-51.65
5	2483.52	71.2 PK	74	-2.8	-29.6	-31.01	3.18	-24.06
6	2483.52	53.79 AV	54	-0.21	-47.19	-48.19	3.18	-41.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

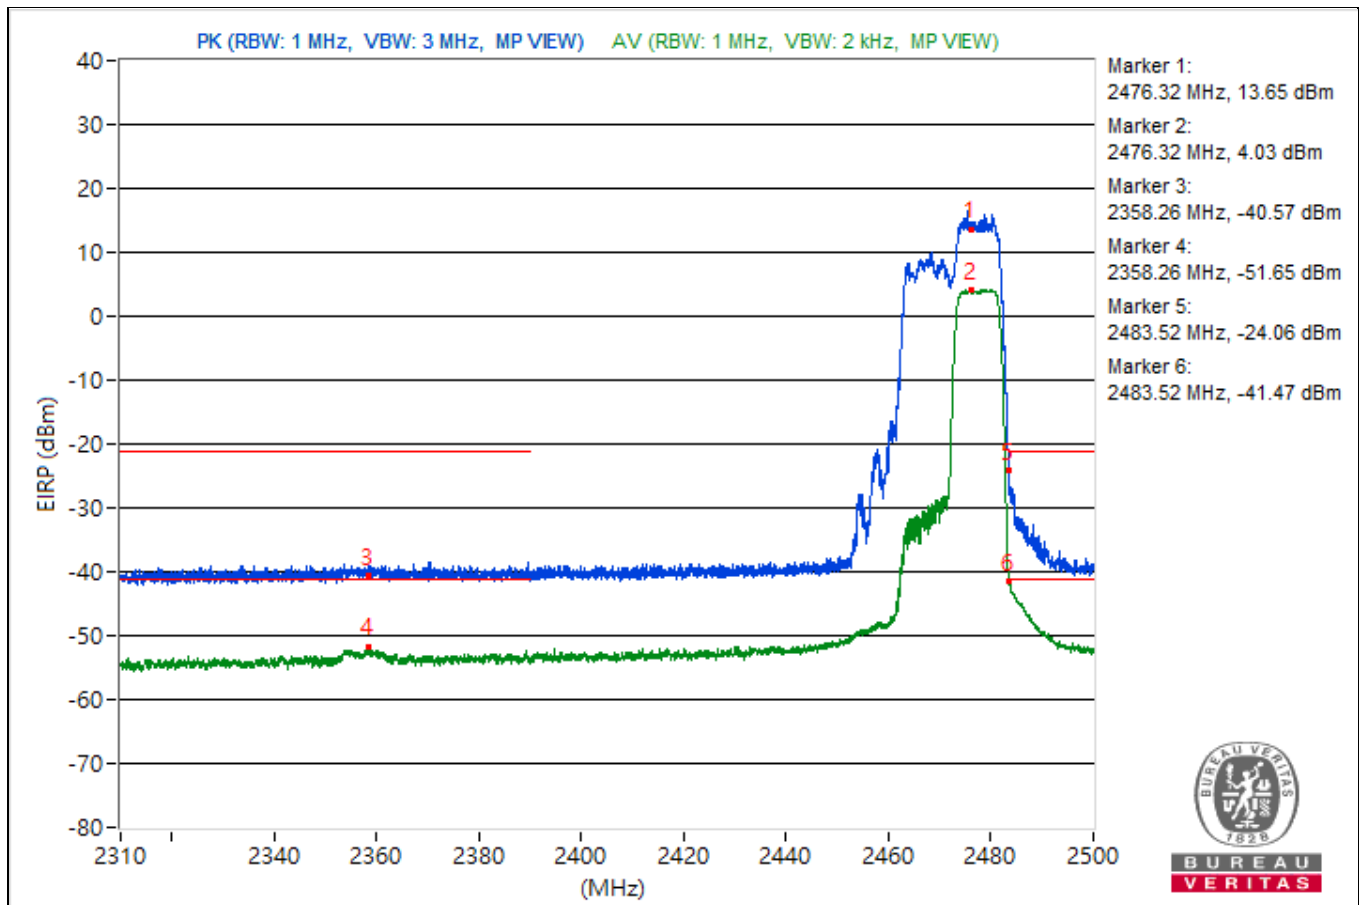


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2409.25	119.49 PK			17.98	18.11	3.18	24.23
2	*2409.25	110.25 AV			9.18	8.39	3.18	14.99
3	2388.23	62.03 PK	74	-11.97	-39.76	-39.1	3.18	-33.23
4	2388.23	49.11 AV	54	-4.89	-53.09	-51.7	3.18	-46.15
5	2486.08	56.31 PK	74	-17.69	-45.57	-44.75	3.18	-38.95
6	2486.08	44.6 AV	54	-9.4	-56.79	-56.92	3.18	-50.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

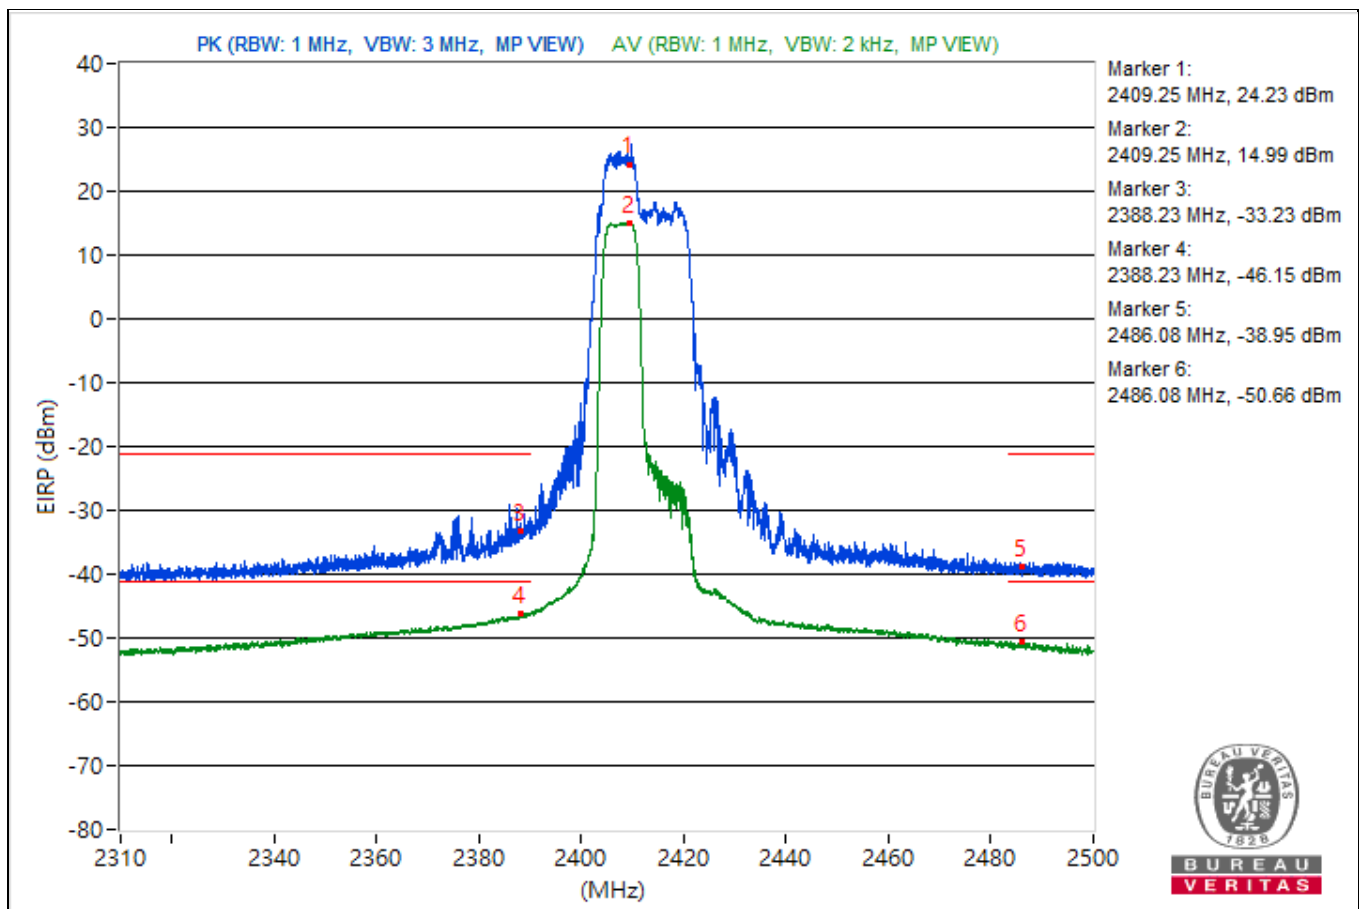


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2433.74	123.59 PK			22.32	21.94	3.18	28.33
2	*2433.74	114.34 AV			12.86	12.92	3.18	19.08
3	2388.11	73.9 PK	74	-0.1	-28.05	-27.1	3.18	-21.36
4	2388.11	51.44 AV	54	-2.56	-50.82	-49.33	3.18	-43.82
5	2484.59	68.71 PK	74	-5.29	-32.76	-32.72	3.18	-26.55
6	2484.59	51.53 AV	54	-2.47	-50.34	-49.55	3.18	-43.73

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

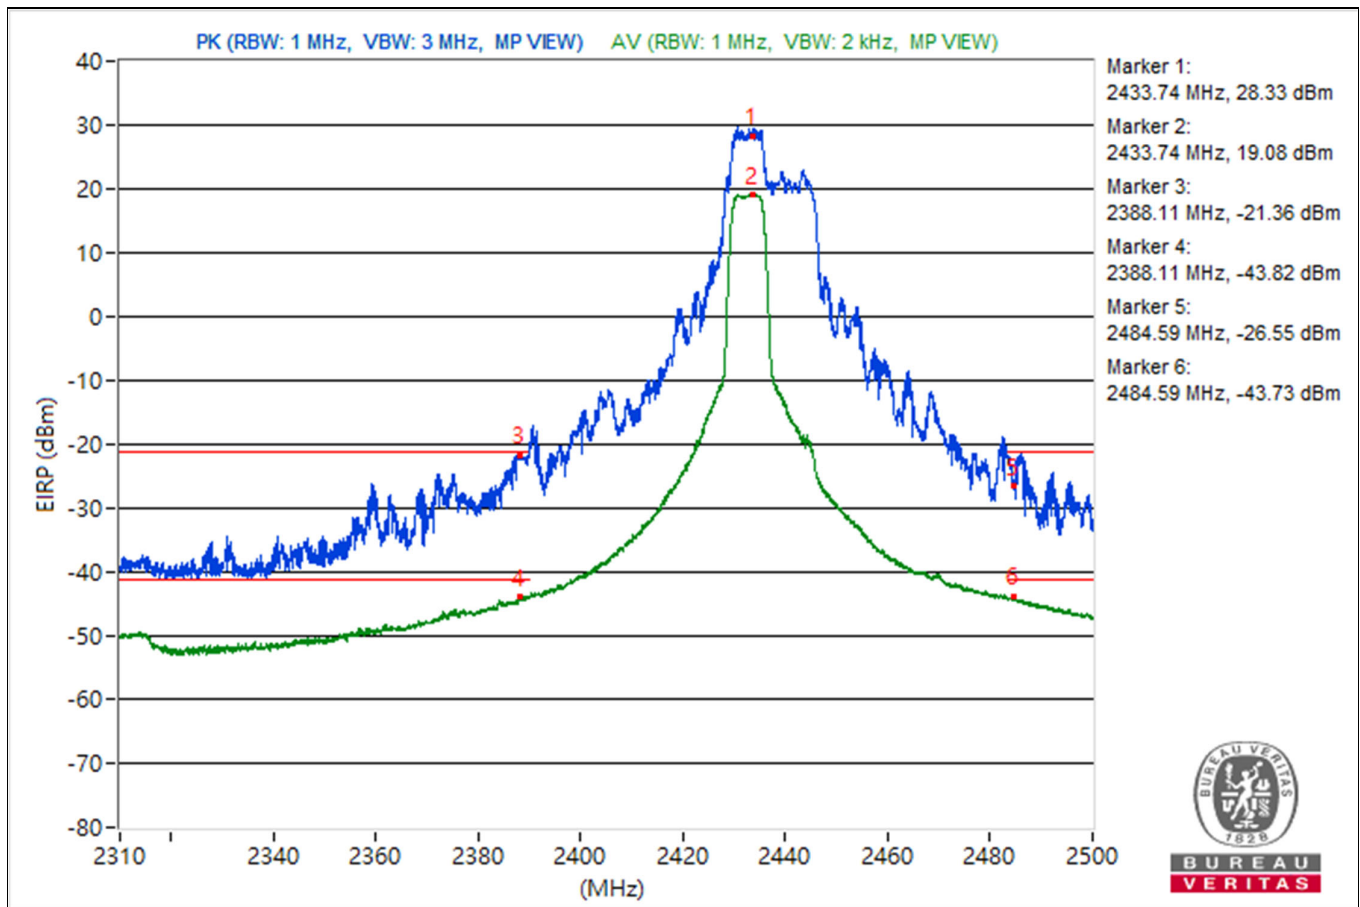


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2466.18	120.79 PK			19.81	18.81	3.18	25.53
2	*2466.18	110.38 AV			9.22	8.62	3.18	15.12
3	2345.13	57.23 PK	74	-16.77	-44.83	-43.69	3.18	-38.03
4	2345.13	46.26 AV	54	-7.74	-54.93	-55.47	3.18	-49.00
5	2483.52	62.33 PK	74	-11.67	-40.03	-38.37	3.18	-32.93
6	2483.52	49.48 AV	54	-4.52	-52.29	-51.67	3.18	-45.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

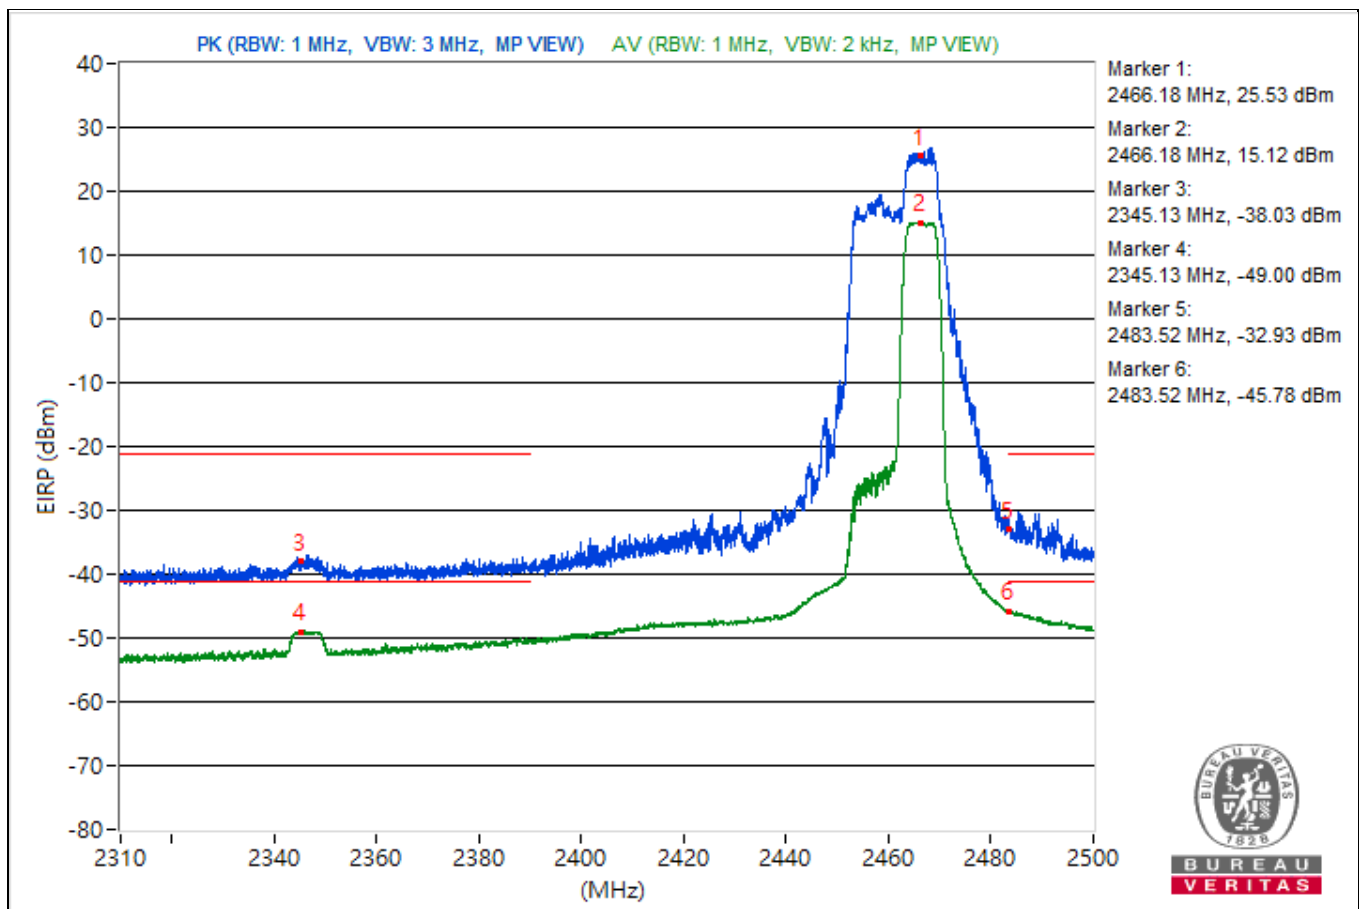


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.72	120.27 PK			19.38	18.18	3.18	25.01
2	*2470.72	109.87 AV			8.43	8.41	3.18	14.61
3	2349.07	56 PK	74	-18	-45.36	-45.54	3.18	-39.26
4	2349.07	46.66 AV	54	-7.34	-55.02	-54.58	3.18	-48.6
5	2483.57	68.42 PK	74	-5.58	-31.44	-35.59	3.18	-26.84
6	2483.57	51.94 AV	54	-2.06	-48.86	-50.28	3.18	-43.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

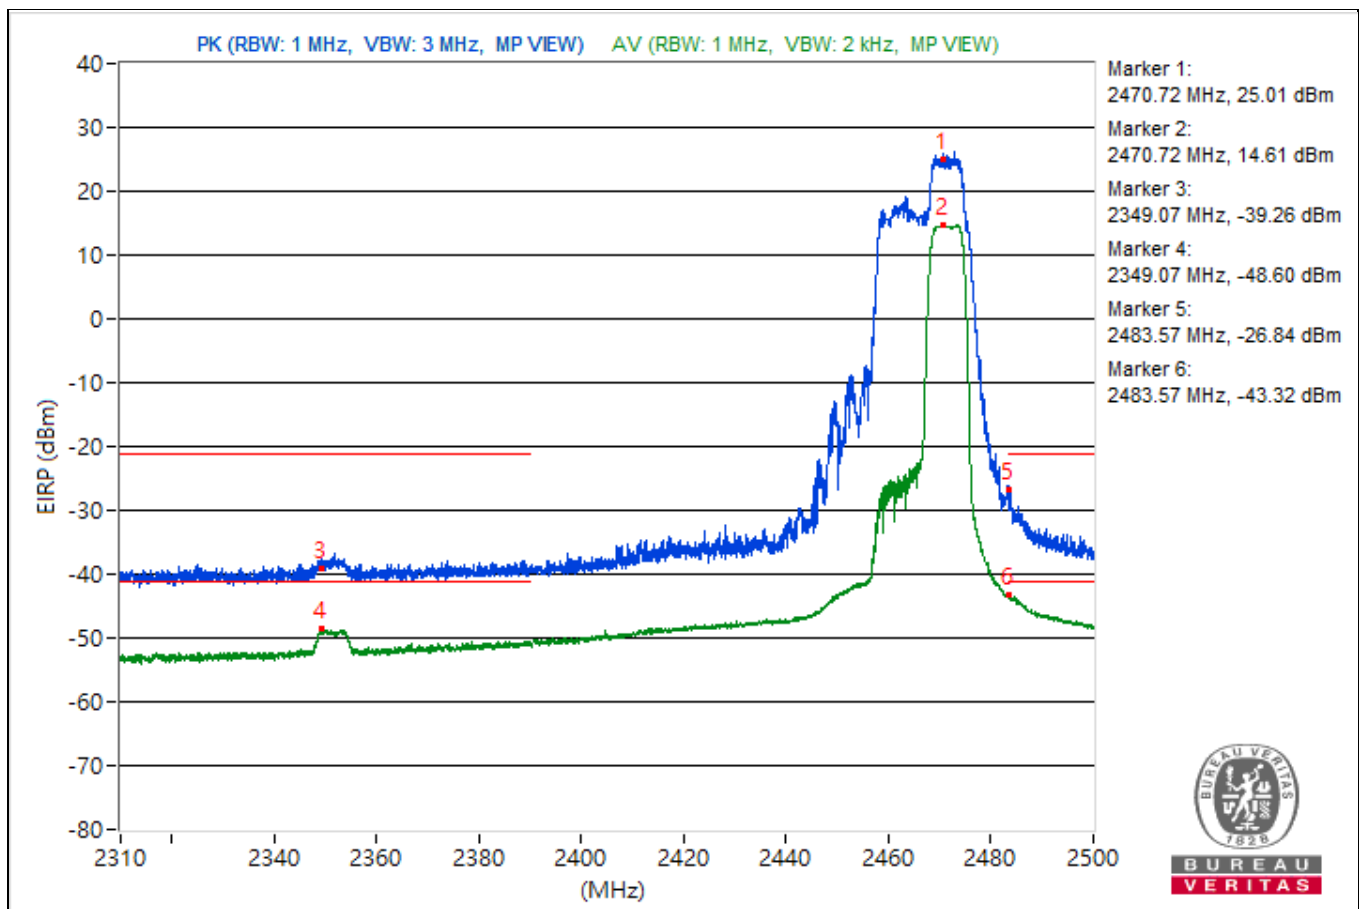


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2474.99	116.74 PK			15.05	15.52	3.18	21.48
2	*2474.99	108.16 AV			6.83	6.6	3.18	12.9
3	2355.34	56.95 PK	74	-17.05	-44.07	-44.98	3.18	-38.31
4	2355.34	45.78 AV	54	-8.22	-55.6	-55.73	3.18	-49.48
5	2483.52	72.24 PK	74	-1.76	-28.02	-30.87	3.18	-23.02
6	2483.52	52.38 AV	54	-1.62	-48.93	-49.22	3.18	-42.88

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

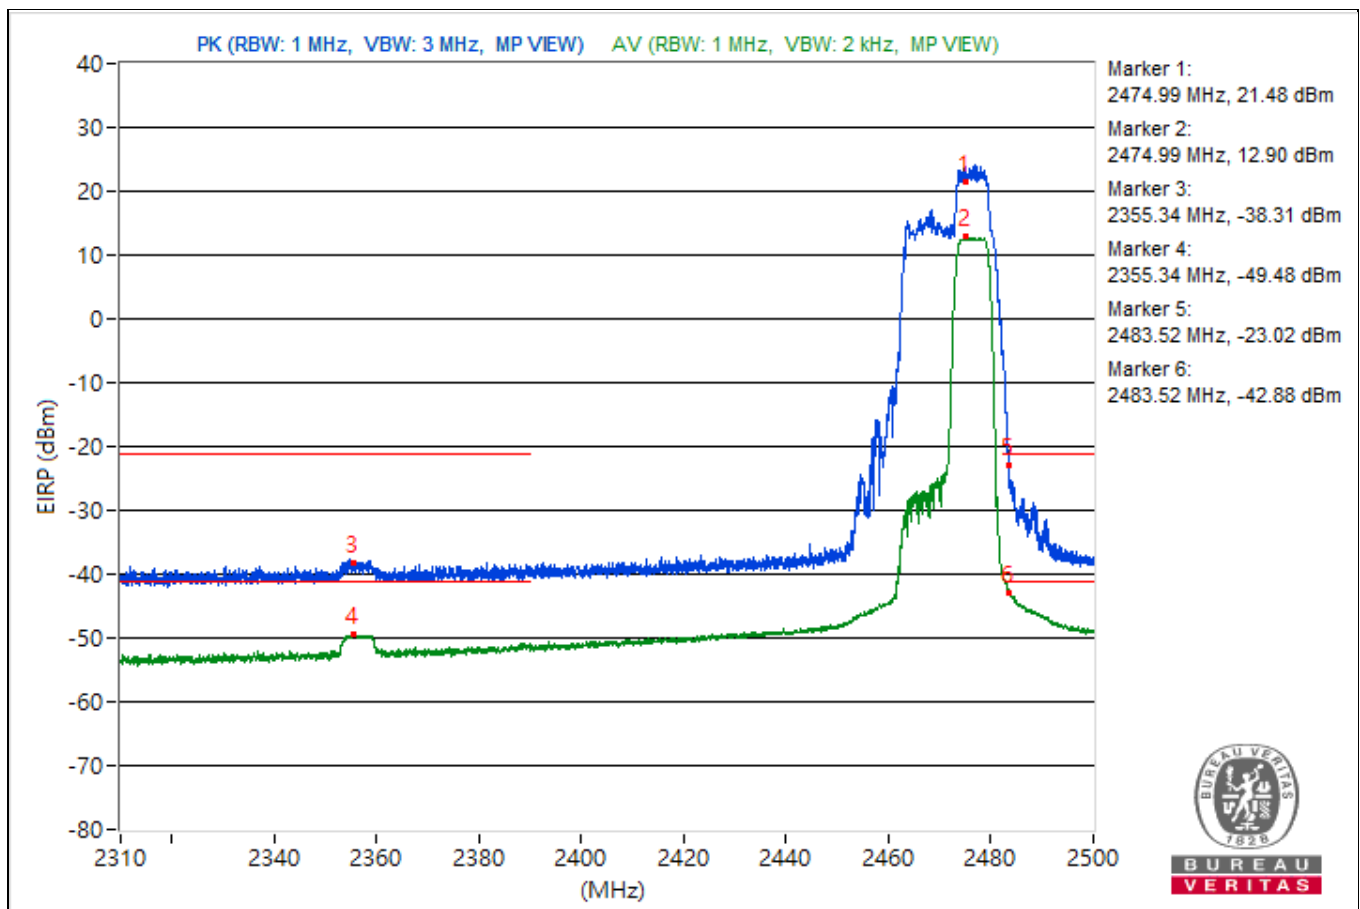


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.91	118.27 PK			17.15	16.45	3.18	23.01
2	*2410.91	108.8 AV			7.37	7.32	3.18	13.54
3	2389.82	64.95 PK	74	-9.05	-40.53	-34.45	3.18	-30.31
4	2389.82	50.72 AV	54	-3.28	-51.35	-50.19	3.18	-44.54
5	2483.61	56.78 PK	74	-17.22	-45.07	-44.31	3.18	-38.48
6	2483.61	44.73 AV	54	-9.27	-57.62	-55.98	3.18	-50.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

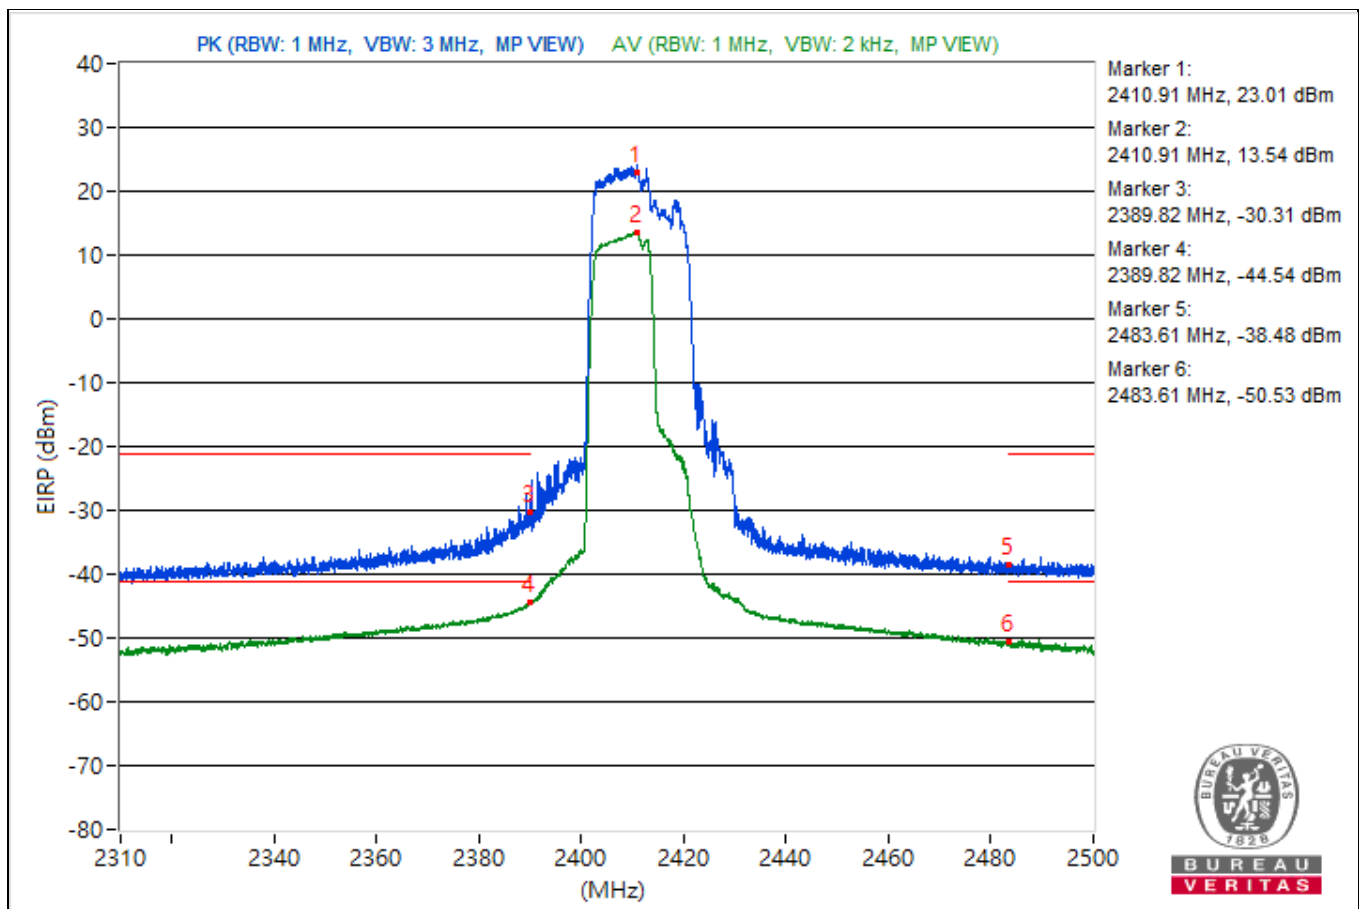


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2435.45	122.42 PK			20.88	21.04	3.18	27.16
2	*2435.45	112.94 AV			11.52	11.46	3.18	17.68
3	2389.97	63.74 PK	74	-10.26	-40.8	-35.92	3.18	-31.52
4	2389.97	50.52 AV	54	-3.48	-52.39	-49.84	3.18	-44.74
5	2484.97	62.48 PK	74	-11.52	-38.96	-38.97	3.18	-32.78
6	2484.97	50.25 AV	54	-3.75	-52.28	-50.33	3.18	-45.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

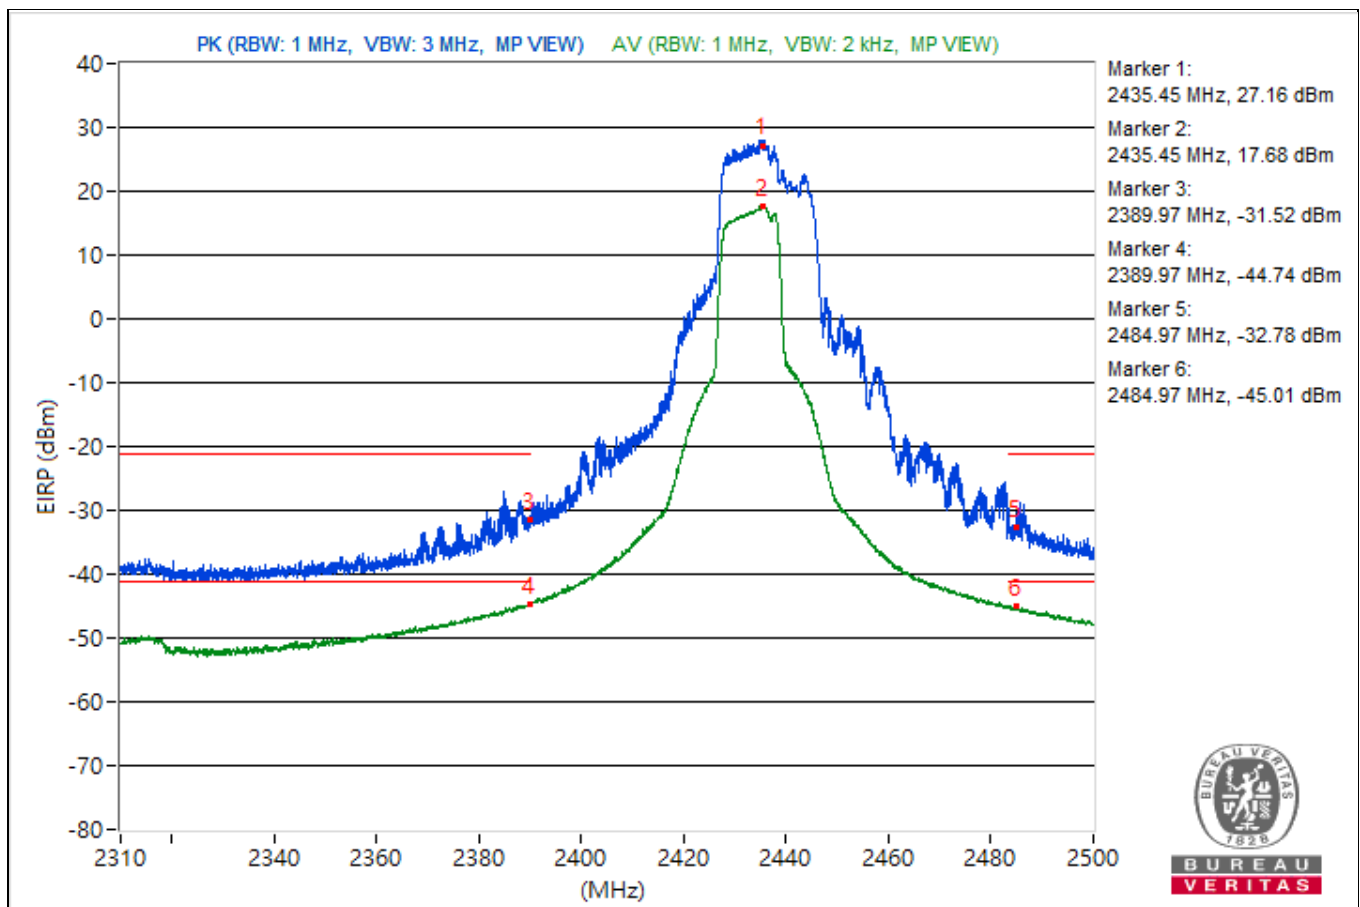


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2463.24	118.67 PK			16.75	17.65	3.18	23.41
2	*2463.24	108.66 AV			7.25	7.16	3.18	13.4
3	2342.78	56.15 PK	74	-17.85	-45.6	-45.03	3.18	-39.11
4	2342.78	45.67 AV	54	-8.33	-56.2	-55.39	3.18	-49.59
5	2484.02	60.31 PK	74	-13.69	-40.89	-41.4	3.18	-34.95
6	2484.02	49.73 AV	54	-4.27	-52.29	-51.21	3.18	-45.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

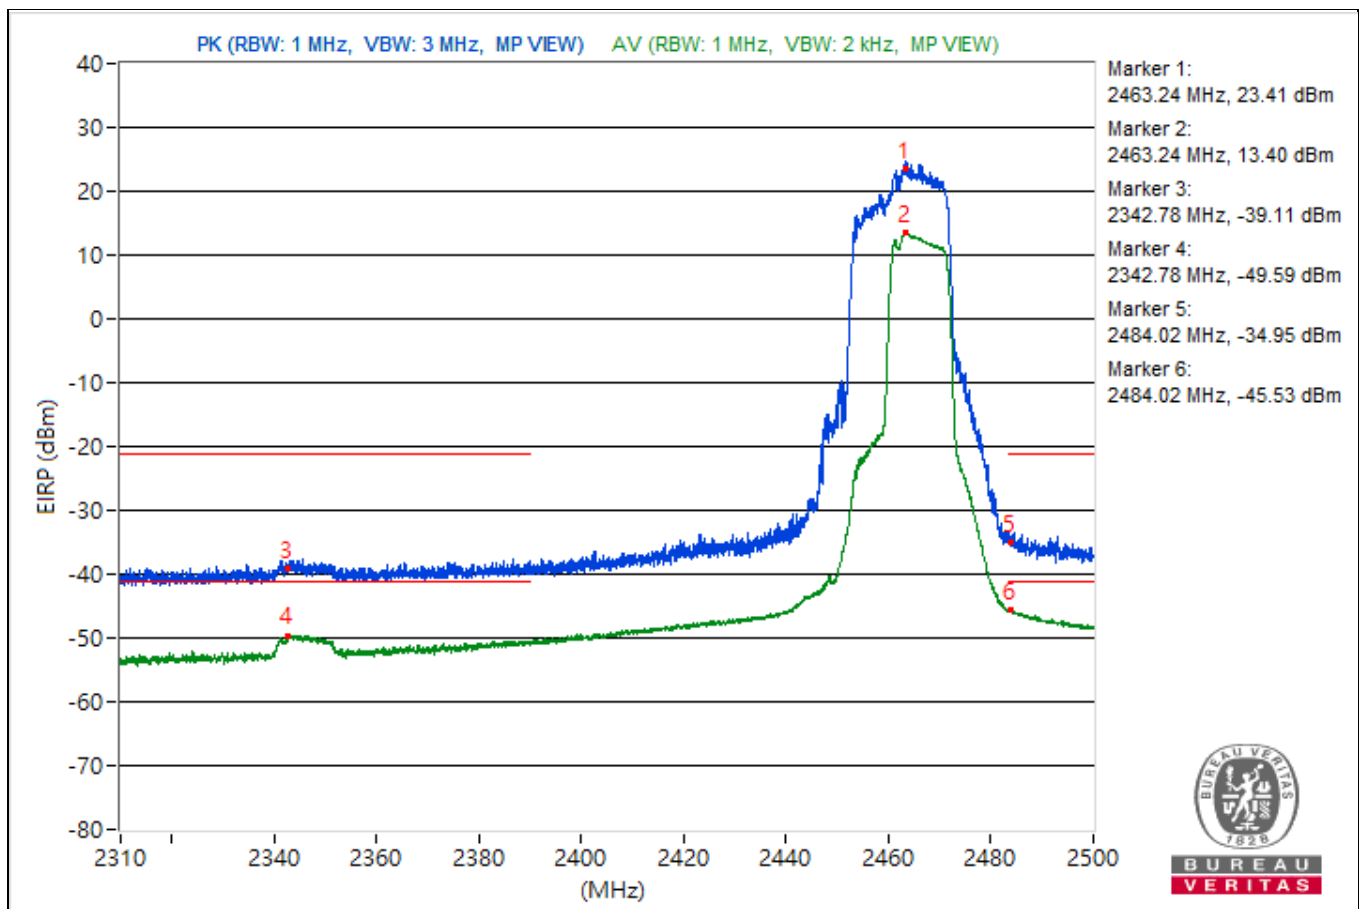


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.39	117.04 PK			15.04	16.08	3.18	21.78
2	*2468.39	107.63 AV			6.13	6.23	3.18	12.37
3	2349.38	55.93 PK	74	-18.07	-45.64	-45.4	3.18	-39.33
4	2349.38	45.17 AV	54	-8.83	-56.6	-55.97	3.18	-50.09
5	2483.8	66.94 PK	74	-7.06	-36.49	-33.16	3.18	-28.32
6	2483.8	53.74 AV	54	-0.26	-48.21	-47.27	3.18	-41.52

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

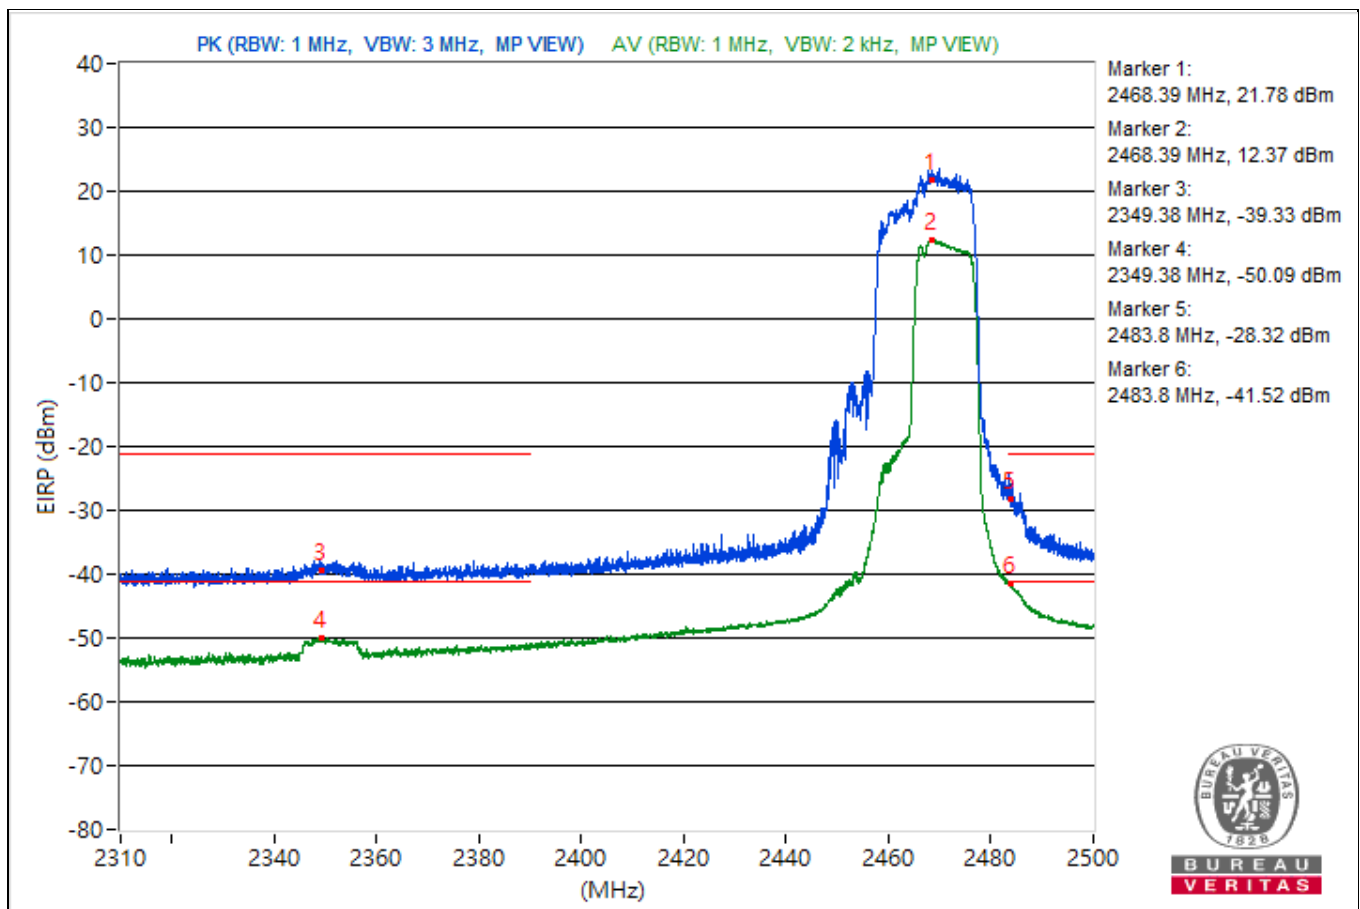


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 55% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.42	115.66 PK			14.15	14.27	3.18	20.4
2	*2473.42	105.75 AV			4.52	4.07	3.18	10.49
3	2353.63	55.9 PK	74	-18.1	-45.46	-45.65	3.18	-39.36
4	2353.63	44.77 AV	54	-9.23	-56.65	-56.71	3.18	-50.49
5	2483.52	67.52 PK	74	-6.48	-33.64	-34.23	3.18	-27.74
6	2483.52	53.99 AV	54	-0.01	-46.8	-48.24	3.18	-41.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

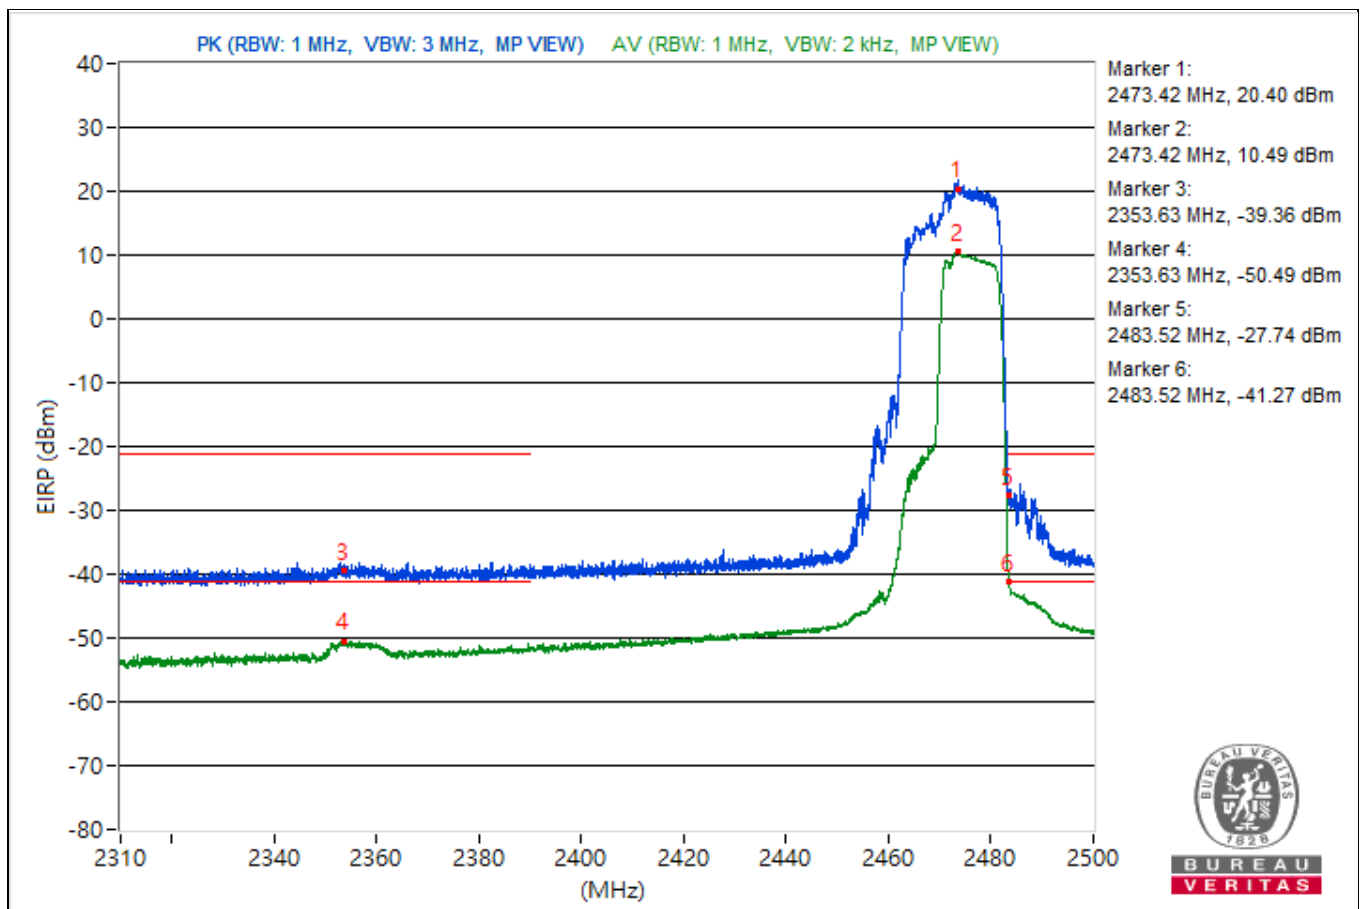

Mode B

1Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.3 PK	74.0	-29.7	1.14 H	281	43.3	1.0
2	4824.00	36.0 AV	54.0	-18.0	1.14 H	281	35.0	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.5 PK	74.0	-28.5	3.77 V	340	44.5	1.0
2	4824.00	42.3 AV	54.0	-11.7	3.77 V	340	41.3	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.0 PK	74.0	-30.0	1.36 H	129	43.1	0.9
2	4874.00	33.4 AV	54.0	-20.6	1.36 H	129	32.5	0.9
3	7311.00	41.8 PK	74.0	-32.2	1.66 H	147	34.4	7.4
4	7311.00	35.0 AV	54.0	-19.0	1.66 H	147	27.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	48.4 PK	74.0	-25.6	3.90 V	330	47.5	0.9
2	4874.00	45.4 AV	54.0	-8.6	3.90 V	330	44.5	0.9
3	7311.00	44.6 PK	74.0	-29.4	2.05 V	300	37.2	7.4
4	7311.00	33.0 AV	54.0	-21.0	2.05 V	300	25.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.1 PK	74.0	-28.9	1.02 H	289	44.0	1.1
2	4924.00	33.5 AV	54.0	-20.5	1.02 H	289	32.4	1.1
3	7386.00	41.2 PK	74.0	-32.8	1.29 H	282	33.8	7.4
4	7386.00	34.5 AV	54.0	-19.5	1.29 H	282	27.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	50.3 PK	74.0	-23.7	3.74 V	330	49.2	1.1
2	4924.00	48.5 AV	54.0	-5.5	3.74 V	330	47.4	1.1
3	7386.00	46.0 PK	74.0	-28.0	2.05 V	278	38.6	7.4
4	7386.00	34.8 AV	54.0	-19.2	2.05 V	278	27.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	45.8 PK	74.0	-28.2	2.17 H	148	44.7	1.1
2	4934.00	35.7 AV	54.0	-18.3	2.17 H	148	34.6	1.1
3	7401.00	41.2 PK	74.0	-32.8	1.34 H	114	33.7	7.5
4	7401.00	34.5 AV	54.0	-19.5	1.34 H	114	27.0	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	50.5 PK	74.0	-23.5	3.96 V	332	49.4	1.1
2	4934.00	48.6 AV	54.0	-5.4	3.96 V	332	47.5	1.1
3	7401.00	45.8 PK	74.0	-28.2	2.20 V	269	38.3	7.5
4	7401.00	33.0 AV	54.0	-21.0	2.20 V	269	25.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	45.8 PK	74.0	-28.2	1.00 H	147	44.6	1.2
2	4944.00	36.6 AV	54.0	-17.4	1.00 H	147	35.4	1.2
3	7416.00	41.0 PK	74.0	-33.0	1.00 H	198	33.5	7.5
4	7416.00	34.1 AV	54.0	-19.9	1.00 H	198	26.6	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	51.3 PK	74.0	-22.7	3.98 V	329	50.1	1.2
2	4944.00	49.6 AV	54.0	-4.4	3.98 V	329	48.4	1.2
3	7416.00	45.9 PK	74.0	-28.1	2.42 V	119	38.4	7.5
4	7416.00	33.5 AV	54.0	-20.5	2.42 V	119	26.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	39.6 PK	74.0	-34.4	1.81 H	303	38.6	1.0
2	4824.00	27.0 AV	54.0	-27.0	1.81 H	303	26.0	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.0 PK	74.0	-32.0	4.00 V	329	41.0	1.0
2	4824.00	30.3 AV	54.0	-23.7	4.00 V	329	29.3	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.2 PK	74.0	-30.8	3.14 H	327	42.3	0.9
2	4874.00	30.8 AV	54.0	-23.2	3.14 H	327	29.9	0.9
3	7311.00	42.3 PK	74.0	-31.7	3.72 H	129	34.9	7.4
4	7311.00	30.2 AV	54.0	-23.8	3.72 H	129	22.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.2 PK	74.0	-29.8	4.00 V	329	43.3	0.9
2	4874.00	32.2 AV	54.0	-21.8	4.00 V	329	31.3	0.9
3	7311.00	42.9 PK	74.0	-31.1	3.77 V	85	35.5	7.4
4	7311.00	30.5 AV	54.0	-23.5	3.77 V	85	23.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.3 PK	74.0	-29.7	3.74 H	150	43.2	1.1
2	4924.00	31.8 AV	54.0	-22.2	3.74 H	150	30.7	1.1
3	7386.00	42.5 PK	74.0	-31.5	1.39 H	236	35.1	7.4
4	7386.00	29.9 AV	54.0	-24.1	1.39 H	236	22.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.8 PK	74.0	-27.2	4.00 V	329	45.7	1.1
2	4924.00	33.5 AV	54.0	-20.5	4.00 V	329	32.4	1.1
3	7386.00	44.6 PK	74.0	-29.4	3.84 V	59	37.2	7.4
4	7386.00	32.7 AV	54.0	-21.3	3.84 V	59	25.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	43.6 PK	74.0	-30.4	3.30 H	1	42.5	1.1
2	4934.00	31.8 AV	54.0	-22.2	3.30 H	1	30.7	1.1
3	7401.00	42.6 PK	74.0	-31.4	1.26 H	234	35.1	7.5
4	7401.00	30.1 AV	54.0	-23.9	1.26 H	234	22.6	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.0 PK	74.0	-28.0	4.00 V	334	44.9	1.1
2	4934.00	33.1 AV	54.0	-20.9	4.00 V	334	32.0	1.1
3	7401.00	43.1 PK	74.0	-30.9	3.55 V	67	35.6	7.5
4	7401.00	34.8 AV	54.0	-19.2	3.55 V	67	27.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.0 PK	74.0	-30.0	3.48 H	323	42.8	1.2
2	4944.00	32.0 AV	54.0	-22.0	3.48 H	323	30.8	1.2
3	7416.00	43.8 PK	74.0	-30.2	1.01 H	238	36.3	7.5
4	7416.00	31.2 AV	54.0	-22.8	1.01 H	238	23.7	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	46.5 PK	74.0	-27.5	3.96 V	331	45.3	1.2
2	4944.00	34.0 AV	54.0	-20.0	3.96 V	331	32.8	1.2
3	7416.00	43.9 PK	74.0	-30.1	3.25 V	98	36.4	7.5
4	7416.00	35.3 AV	54.0	-18.7	3.25 V	98	27.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.3 PK	74.0	-31.7	1.86 H	357	41.3	1.0
2	4824.00	28.2 AV	54.0	-25.8	1.86 H	357	27.2	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.0 PK	74.0	-31.0	3.98 V	338	42.0	1.0
2	4824.00	30.1 AV	54.0	-23.9	3.98 V	338	29.1	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.3 PK	74.0	-30.7	2.82 H	20	42.4	0.9
2	4874.00	32.1 AV	54.0	-21.9	2.82 H	20	31.2	0.9
3	7311.00	39.5 PK	74.0	-34.5	3.03 H	63	32.1	7.4
4	7311.00	27.8 AV	54.0	-26.2	3.03 H	63	20.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.9 PK	74.0	-29.1	4.00 V	331	44.0	0.9
2	4874.00	31.0 AV	54.0	-23.0	4.00 V	331	30.1	0.9
3	7311.00	42.7 PK	74.0	-31.3	3.25 V	91	35.3	7.4
4	7311.00	30.2 AV	54.0	-23.8	3.25 V	91	22.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.3 PK	74.0	-29.7	1.18 H	18	43.2	1.1
2	4924.00	33.1 AV	54.0	-20.9	1.18 H	18	32.0	1.1
3	7386.00	38.3 PK	74.0	-35.7	2.98 H	0	30.9	7.4
4	7386.00	27.1 AV	54.0	-26.9	2.98 H	0	19.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.3 PK	74.0	-28.7	3.97 V	334	44.2	1.1
2	4924.00	31.9 AV	54.0	-22.1	3.97 V	334	30.8	1.1
3	7386.00	44.1 PK	74.0	-29.9	3.00 V	61	36.7	7.4
4	7386.00	32.2 AV	54.0	-21.8	3.00 V	61	24.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.4 PK	74.0	-29.6	1.48 H	3	43.3	1.1
2	4934.00	33.2 AV	54.0	-20.8	1.48 H	3	32.1	1.1
3	7401.00	41.5 PK	74.0	-32.5	1.01 H	230	34.0	7.5
4	7401.00	29.4 AV	54.0	-24.6	1.01 H	230	21.9	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	45.1 PK	74.0	-28.9	3.96 V	334	44.0	1.1
2	4934.00	32.8 AV	54.0	-21.2	3.96 V	334	31.7	1.1
3	7401.00	43.4 PK	74.0	-30.6	3.01 V	100	35.9	7.5
4	7401.00	35.2 AV	54.0	-18.8	3.01 V	100	27.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.4 PK	74.0	-29.6	3.33 H	16	43.2	1.2
2	4944.00	33.3 AV	54.0	-20.7	3.33 H	16	32.1	1.2
3	7416.00	42.9 PK	74.0	-31.1	2.28 H	238	35.4	7.5
4	7416.00	30.8 AV	54.0	-23.2	2.28 H	238	23.3	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	45.6 PK	74.0	-28.4	4.00 V	328	44.4	1.2
2	4944.00	33.5 AV	54.0	-20.5	4.00 V	328	32.3	1.2
3	7416.00	43.2 PK	74.0	-30.8	3.02 V	100	35.7	7.5
4	7416.00	34.7 AV	54.0	-19.3	3.02 V	100	27.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	44.2 PK	74.0	-29.8	3.62 H	236	43.3	0.9
2	4844.00	32.8 AV	54.0	-21.2	3.62 H	236	31.9	0.9
3	7266.00	38.7 PK	74.0	-35.3	2.30 H	33	31.2	7.5
4	7266.00	27.2 AV	54.0	-26.8	2.30 H	33	19.7	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	44.5 PK	74.0	-29.5	4.00 V	322	43.6	0.9
2	4844.00	30.5 AV	54.0	-23.5	4.00 V	322	29.6	0.9
3	7266.00	42.6 PK	74.0	-31.4	3.30 V	107	35.1	7.5
4	7266.00	30.4 AV	54.0	-23.6	3.30 V	107	22.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.2 PK	74.0	-30.8	3.53 H	330	42.3	0.9
2	4874.00	32.4 AV	54.0	-21.6	3.53 H	330	31.5	0.9
3	7311.00	38.5 PK	74.0	-35.5	2.52 H	342	31.1	7.4
4	7311.00	27.4 AV	54.0	-26.6	2.52 H	342	20.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	45.3 PK	74.0	-28.7	4.00 V	324	44.4	0.9
2	4874.00	31.9 AV	54.0	-22.1	4.00 V	324	31.0	0.9
3	7311.00	44.1 PK	74.0	-29.9	3.05 V	45	36.7	7.4
4	7311.00	32.4 AV	54.0	-21.6	3.05 V	45	25.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	44.7 PK	74.0	-29.3	1.00 H	340	43.6	1.1
2	4904.00	32.9 AV	54.0	-21.1	1.00 H	340	31.8	1.1
3	7356.00	38.0 PK	74.0	-36.0	2.16 H	197	30.5	7.5
4	7356.00	26.8 AV	54.0	-27.2	2.16 H	197	19.3	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	45.4 PK	74.0	-28.6	4.00 V	340	44.3	1.1
2	4904.00	32.0 AV	54.0	-22.0	4.00 V	340	30.9	1.1
3	7356.00	43.9 PK	74.0	-30.1	2.98 V	59	36.4	7.5
4	7356.00	31.9 AV	54.0	-22.1	2.98 V	59	24.4	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	44.2 PK	74.0	-29.8	1.00 H	320	43.1	1.1
2	4914.00	32.8 AV	54.0	-21.2	1.00 H	320	31.7	1.1
3	7371.00	38.9 PK	74.0	-35.1	2.47 H	240	31.5	7.4
4	7371.00	27.7 AV	54.0	-26.3	2.47 H	240	20.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	45.6 PK	74.0	-28.4	3.96 V	333	44.5	1.1
2	4914.00	32.0 AV	54.0	-22.0	3.96 V	333	30.9	1.1
3	7371.00	44.1 PK	74.0	-29.9	2.99 V	56	36.7	7.4
4	7371.00	32.3 AV	54.0	-21.7	2.99 V	56	24.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 60% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	43.8 PK	74.0	-30.2	3.68 H	16	42.7	1.1
2	4924.00	33.0 AV	54.0	-21.0	3.68 H	16	31.9	1.1
3	7386.00	40.0 PK	74.0	-34.0	3.40 H	245	32.6	7.4
4	7386.00	27.5 AV	54.0	-26.5	3.40 H	245	20.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.2 PK	74.0	-28.8	3.94 V	337	44.1	1.1
2	4924.00	31.8 AV	54.0	-22.2	3.94 V	337	30.7	1.1
3	7386.00	44.3 PK	74.0	-29.7	2.98 V	58	36.9	7.4
4	7386.00	32.5 AV	54.0	-21.5	2.98 V	58	25.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	44.8 PK	74.0	-29.2	3.69 H	235	43.8	1.0
2	4824.00	38.4 AV	54.0	-15.6	3.69 H	235	37.4	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	46.9 PK	74.0	-27.1	1.35 V	52	45.9	1.0
2	4824.00	40.3 AV	54.0	-13.7	1.35 V	52	39.3	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	46.9 PK	74.0	-27.1	3.98 H	243	46.0	0.9
2	4874.00	37.6 AV	54.0	-16.4	3.98 H	243	36.7	0.9
3	7311.00	44.8 PK	74.0	-29.2	3.72 H	66	37.4	7.4
4	7311.00	33.2 AV	54.0	-20.8	3.72 H	66	25.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	48.6 PK	74.0	-25.4	3.05 V	341	47.7	0.9
2	4874.00	39.8 AV	54.0	-14.2	3.05 V	341	38.9	0.9
3	7311.00	43.0 PK	74.0	-31.0	1.00 V	35	35.6	7.4
4	7311.00	32.3 AV	54.0	-21.7	1.00 V	35	24.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.9 PK	74.0	-28.1	3.94 H	87	44.8	1.1
2	4924.00	34.9 AV	54.0	-19.1	3.94 H	87	33.8	1.1
3	7386.00	44.0 PK	74.0	-30.0	4.00 H	101	36.6	7.4
4	7386.00	34.2 AV	54.0	-19.8	4.00 H	101	26.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	47.8 PK	74.0	-26.2	3.68 V	2	46.7	1.1
2	4924.00	36.7 AV	54.0	-17.3	3.68 V	2	35.6	1.1
3	7386.00	43.6 PK	74.0	-30.4	1.00 V	255	36.2	7.4
4	7386.00	32.8 AV	54.0	-21.2	1.00 V	255	25.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	47.3 PK	74.0	-26.7	1.16 H	236	46.2	1.1
2	4934.00	39.8 AV	54.0	-14.2	1.16 H	236	38.7	1.1
3	7401.00	44.3 PK	74.0	-29.7	3.50 H	48	36.8	7.5
4	7401.00	33.7 AV	54.0	-20.3	3.50 H	48	26.2	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	47.1 PK	74.0	-26.9	3.96 V	358	46.0	1.1
2	4934.00	39.6 AV	54.0	-14.4	3.96 V	358	38.5	1.1
3	7401.00	43.6 PK	74.0	-30.4	1.32 V	233	36.1	7.5
4	7401.00	32.9 AV	54.0	-21.1	1.32 V	233	25.4	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.7 PK	74.0	-29.3	3.37 H	230	43.5	1.2
2	4944.00	37.1 AV	54.0	-16.9	3.37 H	230	35.9	1.2
3	7416.00	44.2 PK	74.0	-29.8	1.35 H	125	36.7	7.5
4	7416.00	32.6 AV	54.0	-21.4	1.35 H	125	25.1	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	45.6 PK	74.0	-28.4	1.36 V	6	44.4	1.2
2	4944.00	37.9 AV	54.0	-16.1	1.36 V	6	36.7	1.2
3	7416.00	43.6 PK	74.0	-30.4	1.55 V	321	36.1	7.5
4	7416.00	33.5 AV	54.0	-20.5	1.55 V	321	26.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.7 PK	74.0	-28.3	3.40 H	230	44.7	1.0
2	4824.00	38.6 AV	54.0	-15.4	3.40 H	230	37.6	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	46.5 PK	74.0	-27.5	3.61 V	346	45.5	1.0
2	4824.00	37.8 AV	54.0	-16.2	3.61 V	346	36.8	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	48.9 PK	74.0	-25.1	3.32 H	226	48.0	0.9
2	4874.00	42.8 AV	54.0	-11.2	3.32 H	226	41.9	0.9
3	7311.00	44.8 PK	74.0	-29.2	1.31 H	134	37.4	7.4
4	7311.00	33.1 AV	54.0	-20.9	1.31 H	134	25.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	49.0 PK	74.0	-25.0	3.23 V	341	48.1	0.9
2	4874.00	41.3 AV	54.0	-12.7	3.23 V	341	40.4	0.9
3	7311.00	45.2 PK	74.0	-28.8	3.65 V	280	37.8	7.4
4	7311.00	32.9 AV	54.0	-21.1	3.65 V	280	25.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.3 PK	74.0	-28.7	3.35 H	220	44.2	1.1
2	4924.00	39.7 AV	54.0	-14.3	3.35 H	220	38.6	1.1
3	7386.00	44.0 PK	74.0	-30.0	1.34 H	139	36.6	7.4
4	7386.00	32.7 AV	54.0	-21.3	1.34 H	139	25.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.1 PK	74.0	-27.9	1.36 V	5	45.0	1.1
2	4924.00	38.2 AV	54.0	-15.8	1.36 V	5	37.1	1.1
3	7386.00	44.6 PK	74.0	-29.4	1.00 V	321	37.2	7.4
4	7386.00	32.6 AV	54.0	-21.4	1.00 V	321	25.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	45.0 PK	74.0	-29.0	2.55 H	55	43.9	1.1
2	4934.00	37.8 AV	54.0	-16.2	2.55 H	55	36.7	1.1
3	7401.00	42.2 PK	74.0	-31.8	3.00 H	216	34.7	7.5
4	7401.00	33.5 AV	54.0	-20.5	3.00 H	216	26.0	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.1 PK	74.0	-27.9	1.38 V	360	45.0	1.1
2	4934.00	36.2 AV	54.0	-17.8	1.38 V	360	35.1	1.1
3	7401.00	43.5 PK	74.0	-30.5	3.52 V	135	36.0	7.5
4	7401.00	32.6 AV	54.0	-21.4	3.52 V	135	25.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.7 PK	74.0	-29.3	2.52 H	154	43.5	1.2
2	4944.00	37.1 AV	54.0	-16.9	2.52 H	154	35.9	1.2
3	7416.00	43.1 PK	74.0	-30.9	3.22 H	155	35.6	7.5
4	7416.00	33.0 AV	54.0	-21.0	3.22 H	155	25.5	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	45.5 PK	74.0	-28.5	2.80 V	3	44.3	1.2
2	4944.00	36.0 AV	54.0	-18.0	2.80 V	3	34.8	1.2
3	7416.00	44.0 PK	74.0	-30.0	1.20 V	139	36.5	7.5
4	7416.00	32.5 AV	54.0	-21.5	1.20 V	139	25.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	38.4 PK	74.0	-35.6	1.69 H	33	37.4	1.0
2	4824.00	27.0 AV	54.0	-27.0	1.69 H	33	26.0	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	46.3 PK	74.0	-27.7	3.56 V	353	45.3	1.0
2	4824.00	37.7 AV	54.0	-16.3	3.56 V	353	36.7	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.5 PK	74.0	-32.5	1.34 H	242	40.6	0.9
2	4874.00	31.2 AV	54.0	-22.8	1.34 H	242	30.3	0.9
3	7311.00	43.3 PK	74.0	-30.7	1.25 H	32	35.9	7.4
4	7311.00	32.2 AV	54.0	-21.8	1.25 H	32	24.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	48.8 PK	74.0	-25.2	3.22 V	336	47.9	0.9
2	4874.00	41.4 AV	54.0	-12.6	3.22 V	336	40.5	0.9
3	7311.00	45.8 PK	74.0	-28.2	3.70 V	279	38.4	7.4
4	7311.00	33.3 AV	54.0	-20.7	3.70 V	279	25.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.7 PK	74.0	-28.3	3.36 H	210	44.6	1.1
2	4924.00	40.1 AV	54.0	-13.9	3.36 H	210	39.0	1.1
3	7386.00	43.6 PK	74.0	-30.4	1.33 H	132	36.2	7.4
4	7386.00	32.3 AV	54.0	-21.7	1.33 H	132	24.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.3 PK	74.0	-27.7	1.41 V	124	45.2	1.1
2	4924.00	38.4 AV	54.0	-15.6	1.41 V	124	37.3	1.1
3	7386.00	44.8 PK	74.0	-29.2	1.00 V	331	37.4	7.4
4	7386.00	32.6 AV	54.0	-21.4	1.00 V	331	25.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.3 PK	74.0	-27.7	1.25 H	241	45.2	1.1
2	4934.00	35.7 AV	54.0	-18.3	1.25 H	241	34.6	1.1
3	7401.00	43.9 PK	74.0	-30.1	1.35 H	234	36.4	7.5
4	7401.00	32.7 AV	54.0	-21.3	1.35 H	234	25.2	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.7 PK	74.0	-27.3	1.33 V	357	45.6	1.1
2	4934.00	36.6 AV	54.0	-17.4	1.33 V	357	35.5	1.1
3	7401.00	43.4 PK	74.0	-30.6	3.54 V	133	35.9	7.5
4	7401.00	32.4 AV	54.0	-21.6	3.54 V	133	24.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.7 PK	74.0	-29.3	2.50 H	162	43.5	1.2
2	4944.00	37.1 AV	54.0	-16.9	2.50 H	162	35.9	1.2
3	7416.00	42.5 PK	74.0	-31.5	3.19 H	152	35.0	7.5
4	7416.00	32.6 AV	54.0	-21.4	3.19 H	152	25.1	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	45.8 PK	74.0	-28.2	2.76 V	115	44.6	1.2
2	4944.00	36.3 AV	54.0	-17.7	2.76 V	115	35.1	1.2
3	7416.00	43.9 PK	74.0	-30.1	1.22 V	123	36.4	7.5
4	7416.00	32.6 AV	54.0	-21.4	1.22 V	123	25.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.3 PK	74.0	-28.7	3.44 H	211	44.3	1.0
2	4824.00	38.4 AV	54.0	-15.6	3.44 H	211	37.4	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	46.2 PK	74.0	-27.8	3.64 V	349	45.2	1.0
2	4824.00	37.5 AV	54.0	-16.5	3.64 V	349	36.5	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.7 PK	74.0	-32.3	1.31 H	216	40.8	0.9
2	4874.00	31.2 AV	54.0	-22.8	1.31 H	216	30.3	0.9
3	7311.00	43.2 PK	74.0	-30.8	1.19 H	47	35.8	7.4
4	7311.00	32.2 AV	54.0	-21.8	1.19 H	47	24.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	49.1 PK	74.0	-24.9	3.19 V	327	48.2	0.9
2	4874.00	41.6 AV	54.0	-12.4	3.19 V	327	40.7	0.9
3	7311.00	45.2 PK	74.0	-28.8	3.73 V	268	37.8	7.4
4	7311.00	32.7 AV	54.0	-21.3	3.73 V	268	25.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.3 PK	74.0	-28.7	1.58 H	233	44.2	1.1
2	4924.00	36.8 AV	54.0	-17.2	1.58 H	233	35.7	1.1
3	7386.00	42.3 PK	74.0	-31.7	2.47 H	103	34.9	7.4
4	7386.00	31.6 AV	54.0	-22.4	2.47 H	103	24.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.1 PK	74.0	-27.9	1.39 V	255	45.0	1.1
2	4924.00	38.5 AV	54.0	-15.5	1.39 V	255	37.4	1.1
3	7386.00	45.0 PK	74.0	-29.0	1.00 V	330	37.6	7.4
4	7386.00	32.3 AV	54.0	-21.7	1.00 V	330	24.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.5 PK	74.0	-27.5	1.23 H	258	45.4	1.1
2	4934.00	36.0 AV	54.0	-18.0	1.23 H	258	34.9	1.1
3	7401.00	43.4 PK	74.0	-30.6	1.28 H	243	35.9	7.5
4	7401.00	32.7 AV	54.0	-21.3	1.28 H	243	25.2	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	47.3 PK	74.0	-26.7	1.36 V	342	46.2	1.1
2	4934.00	37.1 AV	54.0	-16.9	1.36 V	342	36.0	1.1
3	7401.00	43.4 PK	74.0	-30.6	3.53 V	139	35.9	7.5
4	7401.00	32.1 AV	54.0	-21.9	3.53 V	139	24.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.7 PK	74.0	-29.3	2.49 H	153	43.5	1.2
2	4944.00	37.2 AV	54.0	-16.8	2.49 H	153	36.0	1.2
3	7416.00	42.5 PK	74.0	-31.5	3.23 H	137	35.0	7.5
4	7416.00	32.7 AV	54.0	-21.3	3.23 H	137	25.2	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	45.7 PK	74.0	-28.3	2.76 V	108	44.5	1.2
2	4944.00	36.0 AV	54.0	-18.0	2.76 V	108	34.8	1.2
3	7416.00	43.5 PK	74.0	-30.5	1.19 V	112	36.0	7.5
4	7416.00	32.4 AV	54.0	-21.6	1.19 V	112	24.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.9 PK	74.0	-28.1	3.45 H	219	44.9	1.0
2	4824.00	38.8 AV	54.0	-15.2	3.45 H	219	37.8	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	46.8 PK	74.0	-27.2	3.60 V	347	45.8	1.0
2	4824.00	38.0 AV	54.0	-16.0	3.60 V	347	37.0	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.7 PK	74.0	-32.3	1.34 H	231	40.8	0.9
2	4874.00	31.3 AV	54.0	-22.7	1.34 H	231	30.4	0.9
3	7311.00	43.9 PK	74.0	-30.1	1.20 H	46	36.5	7.4
4	7311.00	32.6 AV	54.0	-21.4	1.20 H	46	25.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	48.5 PK	74.0	-25.5	3.17 V	321	47.6	0.9
2	4874.00	41.1 AV	54.0	-12.9	3.17 V	321	40.2	0.9
3	7311.00	45.2 PK	74.0	-28.8	3.67 V	272	37.8	7.4
4	7311.00	32.9 AV	54.0	-21.1	3.67 V	272	25.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.8 PK	74.0	-28.2	3.36 H	226	44.7	1.1
2	4924.00	39.9 AV	54.0	-14.1	3.36 H	226	38.8	1.1
3	7386.00	43.4 PK	74.0	-30.6	1.28 H	144	36.0	7.4
4	7386.00	31.9 AV	54.0	-22.1	1.28 H	144	24.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.1 PK	74.0	-27.9	1.44 V	146	45.0	1.1
2	4924.00	38.5 AV	54.0	-15.5	1.44 V	146	37.4	1.1
3	7386.00	44.8 PK	74.0	-29.2	1.00 V	340	37.4	7.4
4	7386.00	32.4 AV	54.0	-21.6	1.00 V	340	25.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.7 PK	74.0	-27.3	1.27 H	249	45.6	1.1
2	4934.00	36.2 AV	54.0	-17.8	1.27 H	249	35.1	1.1
3	7401.00	44.1 PK	74.0	-29.9	1.32 H	234	36.6	7.5
4	7401.00	33.1 AV	54.0	-20.9	1.32 H	234	25.6	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	47.0 PK	74.0	-27.0	1.38 V	354	45.9	1.1
2	4934.00	36.8 AV	54.0	-17.2	1.38 V	354	35.7	1.1
3	7401.00	43.4 PK	74.0	-30.6	3.51 V	144	35.9	7.5
4	7401.00	32.4 AV	54.0	-21.6	3.51 V	144	24.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.1 PK	74.0	-29.9	2.48 H	174	42.9	1.2
2	4944.00	36.6 AV	54.0	-17.4	2.48 H	174	35.4	1.2
3	7416.00	42.4 PK	74.0	-31.6	3.17 H	148	34.9	7.5
4	7416.00	32.5 AV	54.0	-21.5	3.17 H	148	25.0	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	46.5 PK	74.0	-27.5	2.71 V	100	45.3	1.2
2	4944.00	36.7 AV	54.0	-17.3	2.71 V	100	35.5	1.2
3	7416.00	44.4 PK	74.0	-29.6	1.27 V	107	36.9	7.5
4	7416.00	33.0 AV	54.0	-21.0	1.27 V	107	25.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

Mode B

2Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.0 PK	74.0	-31.0	1.01 H	289	42.0	1.0
2	4824.00	38.0 AV	54.0	-16.0	1.01 H	289	37.0	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.0 PK	74.0	-29.0	3.97 V	336	44.0	1.0
2	4824.00	41.5 AV	54.0	-12.5	3.97 V	336	40.5	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	45.5 PK	74.0	-28.5	1.02 H	287	44.6	0.9
2	4874.00	41.6 AV	54.0	-12.4	1.02 H	287	40.7	0.9
3	7311.00	40.0 PK	74.0	-34.0	1.06 H	225	32.6	7.4
4	7311.00	29.6 AV	54.0	-24.4	1.06 H	225	22.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	48.1 PK	74.0	-25.9	2.54 V	326	47.2	0.9
2	4874.00	45.0 AV	54.0	-9.0	2.54 V	326	44.1	0.9
3	7311.00	45.2 PK	74.0	-28.8	1.25 V	322	37.8	7.4
4	7311.00	33.8 AV	54.0	-20.2	1.25 V	322	26.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	49.0 PK	74.0	-25.0	1.00 H	288	47.9	1.1
2	4924.00	47.0 AV	54.0	-7.0	1.00 H	288	45.9	1.1
3	7386.00	45.1 PK	74.0	-28.9	2.55 H	300	37.7	7.4
4	7386.00	34.6 AV	54.0	-19.4	2.55 H	300	27.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	48.3 PK	74.0	-25.7	3.96 V	326	47.2	1.1
2	4924.00	45.8 AV	54.0	-8.2	3.96 V	326	44.7	1.1
3	7386.00	46.2 PK	74.0	-27.8	2.16 V	270	38.8	7.4
4	7386.00	35.1 AV	54.0	-18.9	2.16 V	270	27.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	49.9 PK	74.0	-24.1	1.13 H	287	48.8	1.1
2	4934.00	48.7 AV	54.0	-5.3	1.13 H	287	47.6	1.1
3	7401.00	44.5 PK	74.0	-29.5	1.50 H	250	37.0	7.5
4	7401.00	33.2 AV	54.0	-20.8	1.50 H	250	25.7	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	48.4 PK	74.0	-25.6	3.94 V	327	47.3	1.1
2	4934.00	46.1 AV	54.0	-7.9	3.94 V	327	45.0	1.1
3	7401.00	43.5 PK	74.0	-30.5	4.00 V	109	36.0	7.5
4	7401.00	35.0 AV	54.0	-19.0	4.00 V	109	27.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	49.7 PK	74.0	-24.3	3.69 H	341	48.5	1.2
2	4944.00	48.0 AV	54.0	-6.0	3.69 H	341	46.8	1.2
3	7416.00	45.0 PK	74.0	-29.0	3.20 H	280	37.5	7.5
4	7416.00	33.8 AV	54.0	-20.2	3.20 H	280	26.3	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	49.3 PK	74.0	-24.7	3.99 V	332	48.1	1.2
2	4944.00	47.5 AV	54.0	-6.5	3.99 V	332	46.3	1.2
3	7416.00	44.1 PK	74.0	-29.9	2.07 V	273	36.6	7.5
4	7416.00	35.9 AV	54.0	-18.1	2.07 V	273	28.4	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.4 PK	74.0	-30.6	1.25 H	256	42.4	1.0
2	4824.00	31.3 AV	54.0	-22.7	1.25 H	256	30.3	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	45.1 PK	74.0	-28.9	3.09 V	343	44.1	1.0
2	4824.00	32.8 AV	54.0	-21.2	3.09 V	343	31.8	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.9 PK	74.0	-29.1	1.10 H	258	44.0	0.9
2	4874.00	33.8 AV	54.0	-20.2	1.10 H	258	32.9	0.9
3	7311.00	44.7 PK	74.0	-29.3	3.96 H	76	37.3	7.4
4	7311.00	31.6 AV	54.0	-22.4	3.96 H	76	24.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	45.7 PK	74.0	-28.3	2.10 V	263	44.8	0.9
2	4874.00	34.5 AV	54.0	-19.5	2.10 V	263	33.6	0.9
3	7311.00	48.3 PK	74.0	-25.7	2.20 V	312	40.9	7.4
4	7311.00	35.9 AV	54.0	-18.1	2.20 V	312	28.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	48.3 PK	74.0	-25.7	3.77 H	345	47.2	1.1
2	4924.00	35.5 AV	54.0	-18.5	3.77 H	345	34.4	1.1
3	7386.00	45.7 PK	74.0	-28.3	3.62 H	334	38.3	7.4
4	7386.00	33.3 AV	54.0	-20.7	3.62 H	334	25.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	47.5 PK	74.0	-26.5	1.04 V	258	46.4	1.1
2	4924.00	35.1 AV	54.0	-18.9	1.04 V	258	34.0	1.1
3	7386.00	45.2 PK	74.0	-28.8	2.30 V	155	37.8	7.4
4	7386.00	32.7 AV	54.0	-21.3	2.30 V	155	25.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.9 PK	74.0	-27.1	2.28 H	264	45.8	1.1
2	4934.00	35.4 AV	54.0	-18.6	2.28 H	264	34.3	1.1
3	7401.00	44.9 PK	74.0	-29.1	1.00 H	150	37.4	7.5
4	7401.00	32.6 AV	54.0	-21.4	1.00 H	150	25.1	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	48.0 PK	74.0	-26.0	1.00 V	255	46.9	1.1
2	4934.00	35.6 AV	54.0	-18.4	1.00 V	255	34.5	1.1
3	7401.00	46.5 PK	74.0	-27.5	1.50 V	224	39.0	7.5
4	7401.00	34.2 AV	54.0	-19.8	1.50 V	224	26.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	49.0 PK	74.0	-25.0	1.01 H	256	47.8	1.2
2	4944.00	36.2 AV	54.0	-17.8	1.01 H	256	35.0	1.2
3	7416.00	46.4 PK	74.0	-27.6	1.00 H	125	38.9	7.5
4	7416.00	34.1 AV	54.0	-19.9	1.00 H	125	26.6	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	49.5 PK	74.0	-24.5	2.39 V	272	48.3	1.2
2	4944.00	35.9 AV	54.0	-18.1	2.39 V	272	34.7	1.2
3	7416.00	46.8 PK	74.0	-27.2	1.66 V	152	39.3	7.5
4	7416.00	34.4 AV	54.0	-19.6	1.66 V	152	26.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.1 PK	74.0	-30.9	4.00 H	360	42.1	1.0
2	4824.00	30.0 AV	54.0	-24.0	4.00 H	360	29.0	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.6 PK	74.0	-30.4	3.12 V	345	42.6	1.0
2	4824.00	30.8 AV	54.0	-23.2	3.12 V	345	29.8	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	47.7 PK	74.0	-26.3	2.50 H	38	46.8	0.9
2	4874.00	35.2 AV	54.0	-18.8	2.50 H	38	34.3	0.9
3	7311.00	43.6 PK	74.0	-30.4	1.35 H	50	36.2	7.4
4	7311.00	29.8 AV	54.0	-24.2	1.35 H	50	22.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	48.9 PK	74.0	-25.1	2.50 V	137	48.0	0.9
2	4874.00	36.1 AV	54.0	-17.9	2.50 V	137	35.2	0.9
3	7311.00	44.6 PK	74.0	-29.4	1.23 V	99	37.2	7.4
4	7311.00	30.6 AV	54.0	-23.4	1.23 V	99	23.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	44.7 PK	74.0	-29.3	1.75 H	244	43.6	1.1
2	4924.00	33.7 AV	54.0	-20.3	1.75 H	244	32.6	1.1
3	7386.00	43.2 PK	74.0	-30.8	2.78 H	320	35.8	7.4
4	7386.00	28.9 AV	54.0	-25.1	2.78 H	320	21.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.2 PK	74.0	-28.8	2.35 V	133	44.1	1.1
2	4924.00	34.1 AV	54.0	-19.9	2.35 V	133	33.0	1.1
3	7386.00	44.3 PK	74.0	-29.7	1.55 V	264	36.9	7.4
4	7386.00	29.3 AV	54.0	-24.7	1.55 V	264	21.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	44.6 PK	74.0	-29.4	2.35 H	5	43.5	1.1
2	4934.00	32.1 AV	54.0	-21.9	2.35 H	5	31.0	1.1
3	7401.00	43.6 PK	74.0	-30.4	1.23 H	232	36.1	7.5
4	7401.00	29.5 AV	54.0	-24.5	1.23 H	232	22.0	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.0 PK	74.0	-28.0	2.88 V	12	44.9	1.1
2	4934.00	33.3 AV	54.0	-20.7	2.88 V	12	32.2	1.1
3	7401.00	44.2 PK	74.0	-29.8	1.53 V	231	36.7	7.5
4	7401.00	30.7 AV	54.0	-23.3	1.53 V	231	23.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.7 PK	74.0	-29.3	2.37 H	7	43.5	1.2
2	4944.00	32.3 AV	54.0	-21.7	2.37 H	7	31.1	1.2
3	7416.00	43.8 PK	74.0	-30.2	1.05 H	246	36.3	7.5
4	7416.00	30.7 AV	54.0	-23.3	1.05 H	246	23.2	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.2 PK	74.0	-29.8	1.22 V	153	43.0	1.2
2	4944.00	31.5 AV	54.0	-22.5	1.22 V	153	30.3	1.2
3	7416.00	45.3 PK	74.0	-28.7	1.95 V	70	37.8	7.5
4	7416.00	33.1 AV	54.0	-20.9	1.95 V	70	25.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	44.1 PK	74.0	-29.9	1.75 H	229	43.2	0.9
2	4844.00	31.9 AV	54.0	-22.1	1.75 H	229	31.0	0.9
3	7266.00	40.1 PK	74.0	-33.9	3.65 H	343	32.6	7.5
4	7266.00	27.2 AV	54.0	-26.8	3.65 H	343	19.7	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	44.8 PK	74.0	-29.2	1.33 V	246	43.9	0.9
2	4844.00	32.5 AV	54.0	-21.5	1.33 V	246	31.6	0.9
3	7266.00	40.3 PK	74.0	-33.7	2.32 V	135	32.8	7.5
4	7266.00	27.5 AV	54.0	-26.5	2.32 V	135	20.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.5 PK	74.0	-29.5	1.00 H	135	43.6	0.9
2	4874.00	31.6 AV	54.0	-22.4	1.00 H	135	30.7	0.9
3	7311.00	39.1 PK	74.0	-34.9	1.37 H	266	31.7	7.4
4	7311.00	27.4 AV	54.0	-26.6	1.37 H	266	20.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	45.1 PK	74.0	-28.9	1.00 V	256	44.2	0.9
2	4874.00	31.8 AV	54.0	-22.2	1.00 V	256	30.9	0.9
3	7311.00	39.5 PK	74.0	-34.5	1.74 V	50	32.1	7.4
4	7311.00	27.9 AV	54.0	-26.1	1.74 V	50	20.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	44.6 PK	74.0	-29.4	3.65 H	23	43.5	1.1
2	4904.00	31.8 AV	54.0	-22.2	3.65 H	23	30.7	1.1
3	7356.00	39.5 PK	74.0	-34.5	3.43 H	135	32.0	7.5
4	7356.00	27.6 AV	54.0	-26.4	3.43 H	135	20.1	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	45.6 PK	74.0	-28.4	1.48 V	145	44.5	1.1
2	4904.00	32.5 AV	54.0	-21.5	1.48 V	145	31.4	1.1
3	7356.00	40.2 PK	74.0	-33.8	1.00 V	321	32.7	7.5
4	7356.00	28.1 AV	54.0	-25.9	1.00 V	321	20.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	45.5 PK	74.0	-28.5	2.51 H	128	44.4	1.1
2	4914.00	31.2 AV	54.0	-22.8	2.51 H	128	30.1	1.1
3	7371.00	39.1 PK	74.0	-34.9	3.11 H	244	31.7	7.4
4	7371.00	27.7 AV	54.0	-26.3	3.11 H	244	20.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	46.2 PK	74.0	-27.8	2.34 V	217	45.1	1.1
2	4914.00	32.3 AV	54.0	-21.7	2.34 V	217	31.2	1.1
3	7371.00	39.7 PK	74.0	-34.3	3.66 V	14	32.3	7.4
4	7371.00	28.5 AV	54.0	-25.5	3.66 V	14	21.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.2 PK	74.0	-32.8	2.77 H	250	40.1	1.1
2	4924.00	26.9 AV	54.0	-27.1	2.77 H	250	25.8	1.1
3	7386.00	45.5 PK	74.0	-28.5	2.48 H	135	38.1	7.4
4	7386.00	31.8 AV	54.0	-22.2	2.48 H	135	24.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.3 PK	74.0	-27.7	1.35 V	284	45.2	1.1
2	4924.00	32.4 AV	54.0	-21.6	1.35 V	284	31.3	1.1
3	7386.00	42.3 PK	74.0	-31.7	1.32 V	79	34.9	7.4
4	7386.00	27.4 AV	54.0	-26.6	1.32 V	79	20.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.6 PK	74.0	-32.4	1.16 H	260	40.6	1.0
2	4824.00	33.1 AV	54.0	-20.9	1.16 H	260	32.1	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	46.1 PK	74.0	-27.9	3.76 V	340	45.1	1.0
2	4824.00	37.3 AV	54.0	-16.7	3.76 V	340	36.3	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.3 PK	74.0	-30.7	1.00 H	253	42.4	0.9
2	4874.00	34.5 AV	54.0	-19.5	1.00 H	253	33.6	0.9
3	7311.00	44.3 PK	74.0	-29.7	2.51 H	133	36.9	7.4
4	7311.00	33.5 AV	54.0	-20.5	2.51 H	133	26.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	47.5 PK	74.0	-26.5	4.00 V	338	46.6	0.9
2	4874.00	40.1 AV	54.0	-13.9	4.00 V	338	39.2	0.9
3	7311.00	46.2 PK	74.0	-27.8	1.69 V	70	38.8	7.4
4	7311.00	39.4 AV	54.0	-14.6	1.69 V	70	32.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	49.5 PK	74.0	-24.5	1.25 H	237	48.4	1.1
2	4924.00	41.1 AV	54.0	-12.9	1.25 H	237	40.0	1.1
3	7386.00	44.1 PK	74.0	-29.9	1.98 H	138	36.7	7.4
4	7386.00	33.8 AV	54.0	-20.2	1.98 H	138	26.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	48.7 PK	74.0	-25.3	3.02 V	355	47.6	1.1
2	4924.00	41.9 AV	54.0	-12.1	3.02 V	355	40.8	1.1
3	7386.00	45.2 PK	74.0	-28.8	2.80 V	255	37.8	7.4
4	7386.00	34.2 AV	54.0	-19.8	2.80 V	255	26.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	48.4 PK	74.0	-25.6	1.00 H	250	47.3	1.1
2	4934.00	40.4 AV	54.0	-13.6	1.00 H	250	39.3	1.1
3	7401.00	44.8 PK	74.0	-29.2	1.75 H	110	37.3	7.5
4	7401.00	34.0 AV	54.0	-20.0	1.75 H	110	26.5	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	50.4 PK	74.0	-23.6	4.00 V	328	49.3	1.1
2	4934.00	42.7 AV	54.0	-11.3	4.00 V	328	41.6	1.1
3	7401.00	45.3 PK	74.0	-28.7	3.77 V	301	37.8	7.5
4	7401.00	35.1 AV	54.0	-18.9	3.77 V	301	27.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	48.8 PK	74.0	-25.2	1.27 H	255	47.6	1.2
2	4944.00	40.7 AV	54.0	-13.3	1.27 H	255	39.5	1.2
3	7416.00	45.3 PK	74.0	-28.7	1.35 H	77	37.8	7.5
4	7416.00	33.8 AV	54.0	-20.2	1.35 H	77	26.3	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	51.8 PK	74.0	-22.2	3.88 V	329	50.6	1.2
2	4944.00	44.6 AV	54.0	-9.4	3.88 V	329	43.4	1.2
3	7416.00	46.0 PK	74.0	-28.0	3.60 V	315	38.5	7.5
4	7416.00	34.2 AV	54.0	-19.8	3.60 V	315	26.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	33.7 PK	74.0	-40.3	1.00 H	304	32.7	1.0
2	4824.00	27.8 AV	54.0	-26.2	1.00 H	304	26.8	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	43.1 PK	74.0	-30.9	3.71 V	340	42.1	1.0
2	4824.00	33.4 AV	54.0	-20.6	3.71 V	340	32.4	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.6 PK	74.0	-30.4	1.50 H	95	42.7	0.9
2	4874.00	30.4 AV	54.0	-23.6	1.50 H	95	29.5	0.9
3	7311.00	42.6 PK	74.0	-31.4	1.02 H	341	35.2	7.4
4	7311.00	32.4 AV	54.0	-21.6	1.02 H	341	25.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.8 PK	74.0	-29.2	3.60 V	336	43.9	0.9
2	4874.00	35.4 AV	54.0	-18.6	3.60 V	336	34.5	0.9
3	7311.00	42.1 PK	74.0	-31.9	3.32 V	300	34.7	7.4
4	7311.00	31.9 AV	54.0	-22.1	3.32 V	300	24.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.2 PK	74.0	-27.8	1.50 H	92	45.1	1.1
2	4924.00	32.4 AV	54.0	-21.6	1.50 H	92	31.3	1.1
3	7386.00	44.6 PK	74.0	-29.4	2.65 H	131	37.2	7.4
4	7386.00	36.4 AV	54.0	-17.6	2.65 H	131	29.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.6 PK	74.0	-27.4	3.97 V	332	45.5	1.1
2	4924.00	37.1 AV	54.0	-16.9	3.97 V	332	36.0	1.1
3	7386.00	44.2 PK	74.0	-29.8	3.06 V	249	36.8	7.4
4	7386.00	35.2 AV	54.0	-18.8	3.06 V	249	27.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	45.8 PK	74.0	-28.2	1.66 H	215	44.7	1.1
2	4934.00	37.9 AV	54.0	-16.1	1.66 H	215	36.8	1.1
3	7401.00	44.2 PK	74.0	-29.8	3.80 H	150	36.7	7.5
4	7401.00	36.3 AV	54.0	-17.7	3.80 H	150	28.8	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	46.6 PK	74.0	-27.4	3.98 V	331	45.5	1.1
2	4934.00	38.4 AV	54.0	-15.6	3.98 V	331	37.3	1.1
3	7401.00	44.0 PK	74.0	-30.0	2.40 V	301	36.5	7.5
4	7401.00	35.0 AV	54.0	-19.0	2.40 V	301	27.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	44.3 PK	74.0	-29.7	1.96 H	216	43.1	1.2
2	4944.00	35.0 AV	54.0	-19.0	1.96 H	216	33.8	1.2
3	7416.00	41.6 PK	74.0	-32.4	3.45 H	155	34.1	7.5
4	7416.00	32.0 AV	54.0	-22.0	3.45 H	155	24.5	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.7 PK	74.0	-30.3	3.89 V	326	42.5	1.2
2	4944.00	39.8 AV	54.0	-14.2	3.89 V	326	38.6	1.2
3	7416.00	40.3 PK	74.0	-33.7	3.34 V	125	32.8	7.5
4	7416.00	32.0 AV	54.0	-22.0	3.34 V	125	24.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	39.5 PK	74.0	-34.5	1.00 H	132	38.5	1.0
2	4824.00	28.3 AV	54.0	-25.7	1.00 H	132	27.3	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	39.3 PK	74.0	-34.7	1.53 V	25	38.3	1.0
2	4824.00	28.0 AV	54.0	-26.0	1.53 V	25	27.0	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	39.4 PK	74.0	-34.6	1.53 H	10	38.5	0.9
2	4874.00	27.9 AV	54.0	-26.1	1.53 H	10	27.0	0.9
3	7311.00	43.1 PK	74.0	-30.9	1.01 H	3	35.7	7.4
4	7311.00	32.6 AV	54.0	-21.4	1.01 H	3	25.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.2 PK	74.0	-30.8	3.58 V	125	42.3	0.9
2	4874.00	32.2 AV	54.0	-21.8	3.58 V	125	31.3	0.9
3	7311.00	43.8 PK	74.0	-30.2	2.13 V	250	36.4	7.4
4	7311.00	32.5 AV	54.0	-21.5	2.13 V	250	25.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	38.2 PK	74.0	-35.8	2.07 H	3	37.1	1.1
2	4924.00	28.2 AV	54.0	-25.8	2.07 H	3	27.1	1.1
3	7386.00	42.3 PK	74.0	-31.7	3.74 H	92	34.9	7.4
4	7386.00	32.5 AV	54.0	-21.5	3.74 H	92	25.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	39.5 PK	74.0	-34.5	3.60 V	45	38.4	1.1
2	4924.00	27.6 AV	54.0	-26.4	3.60 V	45	26.5	1.1
3	7386.00	42.6 PK	74.0	-31.4	2.63 V	230	35.2	7.4
4	7386.00	32.8 AV	54.0	-21.2	2.63 V	230	25.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	39.4 PK	74.0	-34.6	1.25 H	152	38.3	1.1
2	4934.00	29.7 AV	54.0	-24.3	1.25 H	152	28.6	1.1
3	7401.00	42.0 PK	74.0	-32.0	1.17 H	138	34.5	7.5
4	7401.00	31.5 AV	54.0	-22.5	1.17 H	138	24.0	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	48.2 PK	74.0	-25.8	3.99 V	354	47.1	1.1
2	4934.00	37.5 AV	54.0	-16.5	3.99 V	354	36.4	1.1
3	7401.00	43.1 PK	74.0	-30.9	1.55 V	321	35.6	7.5
4	7401.00	32.7 AV	54.0	-21.3	1.55 V	321	25.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.0 PK	74.0	-31.0	2.34 H	106	41.8	1.2
2	4944.00	31.7 AV	54.0	-22.3	2.34 H	106	30.5	1.2
3	7416.00	42.6 PK	74.0	-31.4	1.77 H	350	35.1	7.5
4	7416.00	32.2 AV	54.0	-21.8	1.77 H	350	24.7	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	46.8 PK	74.0	-27.2	3.95 V	338	45.6	1.2
2	4944.00	35.9 AV	54.0	-18.1	3.95 V	338	34.7	1.2
3	7416.00	44.7 PK	74.0	-29.3	2.08 V	343	37.2	7.5
4	7416.00	32.1 AV	54.0	-21.9	2.08 V	343	24.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	38.9 PK	74.0	-35.1	1.05 H	26	37.9	1.0
2	4824.00	27.9 AV	54.0	-26.1	1.05 H	26	26.9	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	39.8 PK	74.0	-34.2	1.55 V	31	38.8	1.0
2	4824.00	29.1 AV	54.0	-24.9	1.55 V	31	28.1	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	39.6 PK	74.0	-34.4	2.51 H	192	38.7	0.9
2	4874.00	27.3 AV	54.0	-26.7	2.51 H	192	26.4	0.9
3	7311.00	42.7 PK	74.0	-31.3	2.63 H	342	35.3	7.4
4	7311.00	32.5 AV	54.0	-21.5	2.63 H	342	25.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	39.9 PK	74.0	-34.1	1.47 V	335	39.0	0.9
2	4874.00	28.6 AV	54.0	-25.4	1.47 V	335	27.7	0.9
3	7311.00	42.9 PK	74.0	-31.1	1.24 V	331	35.5	7.4
4	7311.00	33.0 AV	54.0	-21.0	1.24 V	331	25.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	37.7 PK	74.0	-36.3	1.02 H	96	36.6	1.1
2	4924.00	27.4 AV	54.0	-26.6	1.02 H	96	26.3	1.1
3	7386.00	42.9 PK	74.0	-31.1	3.46 H	81	35.5	7.4
4	7386.00	32.2 AV	54.0	-21.8	3.46 H	81	24.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	38.5 PK	74.0	-35.5	2.27 V	118	37.4	1.1
2	4924.00	28.5 AV	54.0	-25.5	2.27 V	118	27.4	1.1
3	7386.00	43.3 PK	74.0	-30.7	1.77 V	199	35.9	7.4
4	7386.00	32.6 AV	54.0	-21.4	1.77 V	199	25.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	36.6 PK	74.0	-37.4	3.15 H	339	35.5	1.1
2	4934.00	26.6 AV	54.0	-27.4	3.15 H	339	25.5	1.1
3	7401.00	42.9 PK	74.0	-31.1	2.98 H	331	35.4	7.5
4	7401.00	32.1 AV	54.0	-21.9	2.98 H	331	24.6	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	37.5 PK	74.0	-36.5	1.24 V	228	36.4	1.1
2	4934.00	27.4 AV	54.0	-26.6	1.24 V	228	26.3	1.1
3	7401.00	44.3 PK	74.0	-29.7	1.23 V	209	36.8	7.5
4	7401.00	33.3 AV	54.0	-20.7	1.23 V	209	25.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	37.8 PK	74.0	-36.2	2.65 H	216	36.6	1.2
2	4944.00	27.2 AV	54.0	-26.8	2.65 H	216	26.0	1.2
3	7416.00	43.0 PK	74.0	-31.0	1.82 H	6	35.5	7.5
4	7416.00	32.9 AV	54.0	-21.1	1.82 H	6	25.4	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	38.7 PK	74.0	-35.3	2.57 V	121	37.5	1.2
2	4944.00	28.1 AV	54.0	-25.9	2.57 V	121	26.9	1.2
3	7416.00	42.9 PK	74.0	-31.1	2.74 V	248	35.4	7.5
4	7416.00	32.3 AV	54.0	-21.7	2.74 V	248	24.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	38.9 PK	74.0	-35.1	1.00 H	32	37.9	1.0
2	4824.00	28.0 AV	54.0	-26.0	1.00 H	32	27.0	1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	39.3 PK	74.0	-34.7	1.50 V	35	38.3	1.0
2	4824.00	28.7 AV	54.0	-25.3	1.50 V	35	27.7	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.1 PK	74.0	-33.9	2.54 H	191	39.2	0.9
2	4874.00	27.6 AV	54.0	-26.4	2.54 H	191	26.7	0.9
3	7311.00	42.7 PK	74.0	-31.3	2.63 H	327	35.3	7.4
4	7311.00	32.4 AV	54.0	-21.6	2.63 H	327	25.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	39.8 PK	74.0	-34.2	1.44 V	325	38.9	0.9
2	4874.00	28.6 AV	54.0	-25.4	1.44 V	325	27.7	0.9
3	7311.00	42.9 PK	74.0	-31.1	1.23 V	321	35.5	7.4
4	7311.00	32.7 AV	54.0	-21.3	1.23 V	321	25.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	38.2 PK	74.0	-35.8	1.05 H	84	37.1	1.1
2	4924.00	27.9 AV	54.0	-26.1	1.05 H	84	26.8	1.1
3	7386.00	42.9 PK	74.0	-31.1	3.44 H	69	35.5	7.4
4	7386.00	32.4 AV	54.0	-21.6	3.44 H	69	25.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	38.2 PK	74.0	-35.8	2.32 V	132	37.1	1.1
2	4924.00	28.3 AV	54.0	-25.7	2.32 V	132	27.2	1.1
3	7386.00	43.2 PK	74.0	-30.8	1.77 V	214	35.8	7.4
4	7386.00	32.5 AV	54.0	-21.5	1.77 V	214	25.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	36.5 PK	74.0	-37.5	3.18 H	336	35.4	1.1
2	4934.00	26.4 AV	54.0	-27.6	3.18 H	336	25.3	1.1
3	7401.00	43.2 PK	74.0	-30.8	3.01 H	330	35.7	7.5
4	7401.00	32.6 AV	54.0	-21.4	3.01 H	330	25.1	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	37.2 PK	74.0	-36.8	1.23 V	231	36.1	1.1
2	4934.00	27.1 AV	54.0	-26.9	1.23 V	231	26.0	1.1
3	7401.00	44.1 PK	74.0	-29.9	1.23 V	214	36.6	7.5
4	7401.00	32.9 AV	54.0	-21.1	1.23 V	214	25.4	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 62% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	37.9 PK	74.0	-36.1	2.63 H	217	36.7	1.2
2	4944.00	27.5 AV	54.0	-26.5	2.63 H	217	26.3	1.2
3	7416.00	42.7 PK	74.0	-31.3	1.78 H	1	35.2	7.5
4	7416.00	32.5 AV	54.0	-21.5	1.78 H	1	25.0	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	38.5 PK	74.0	-35.5	2.56 V	133	37.3	1.2
2	4944.00	27.9 AV	54.0	-26.1	2.56 V	133	26.7	1.2
3	7416.00	43.0 PK	74.0	-31.0	2.70 V	255	35.5	7.5
4	7416.00	32.6 AV	54.0	-21.4	2.70 V	255	25.1	7.5


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

Plot of Other Emission

Mode B


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

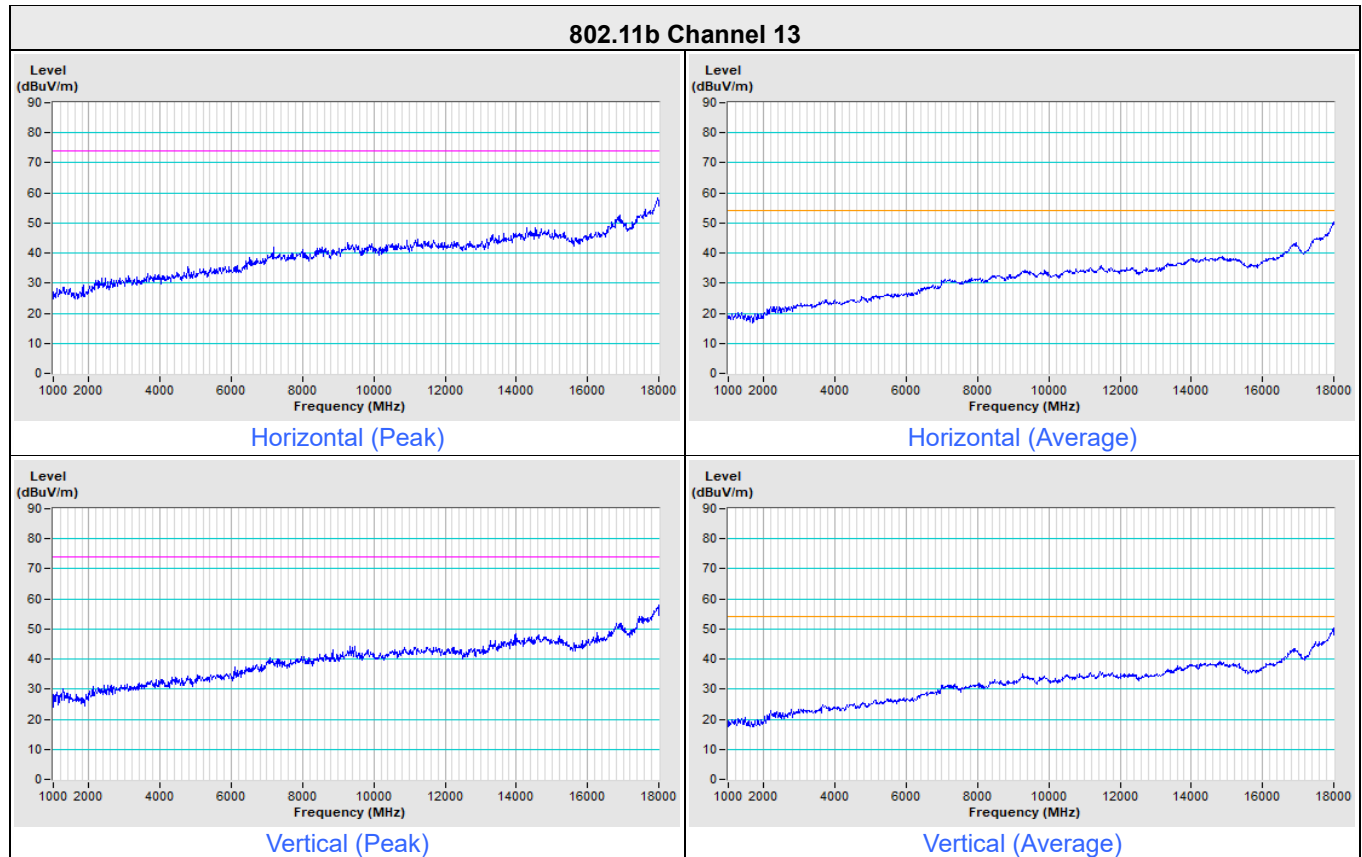

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

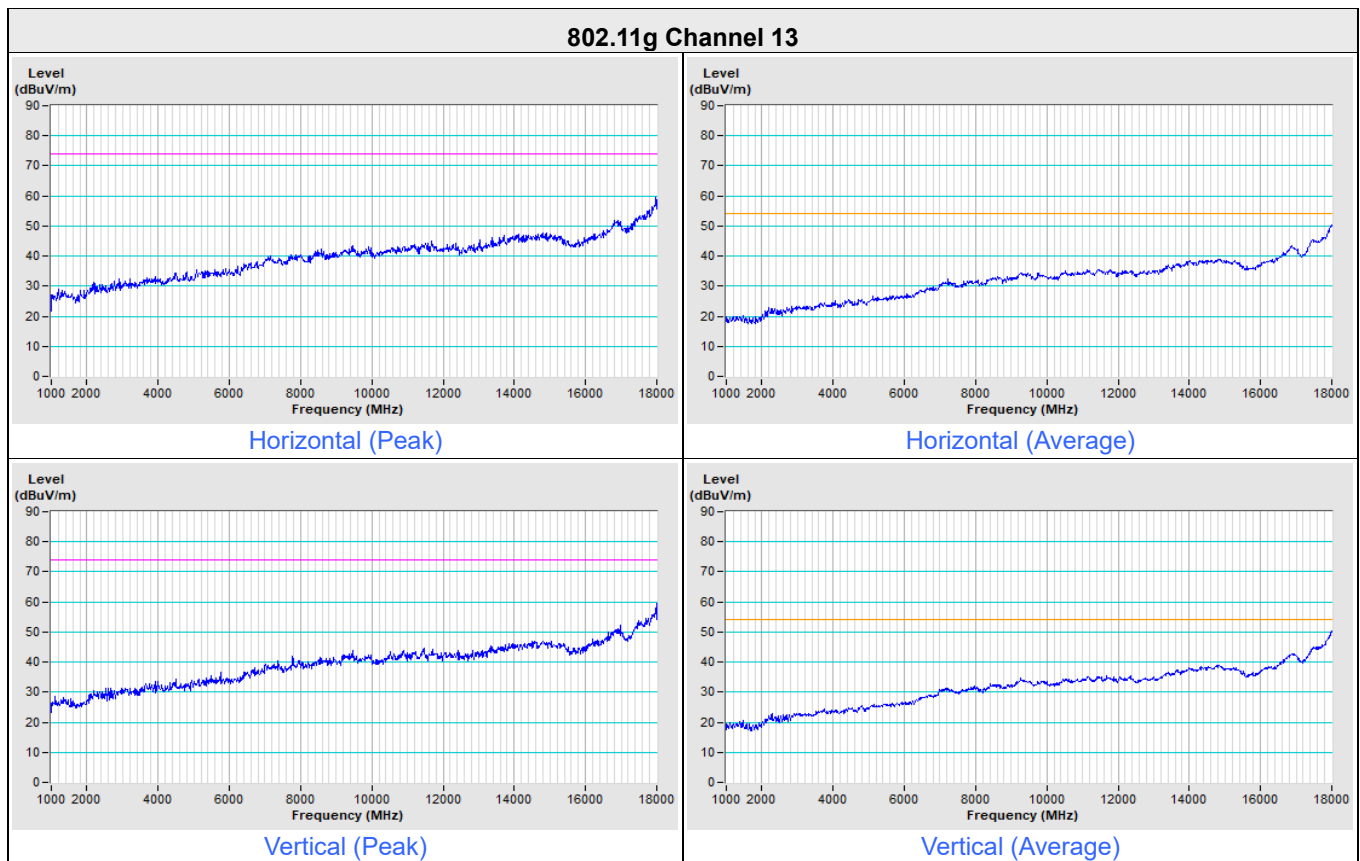

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

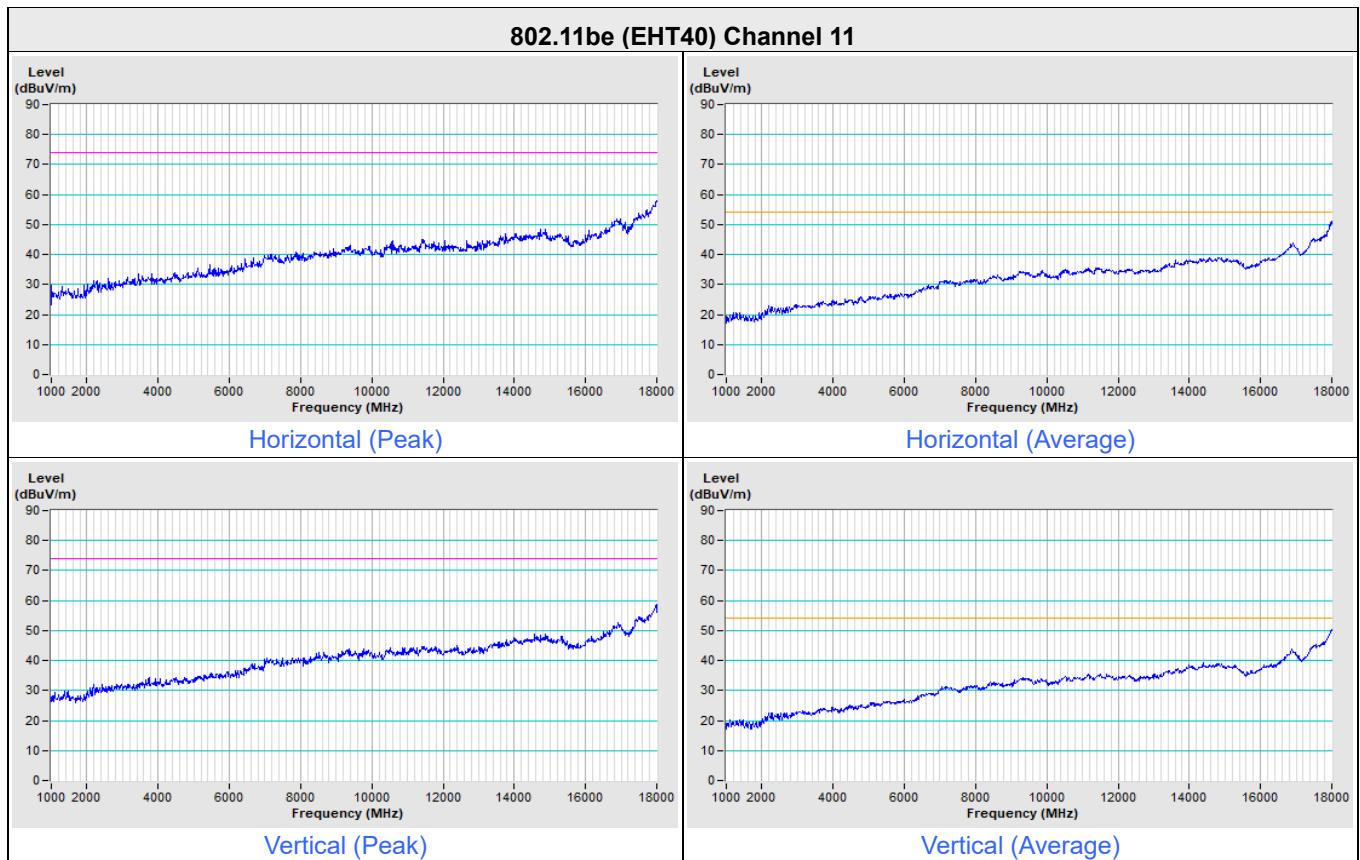

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

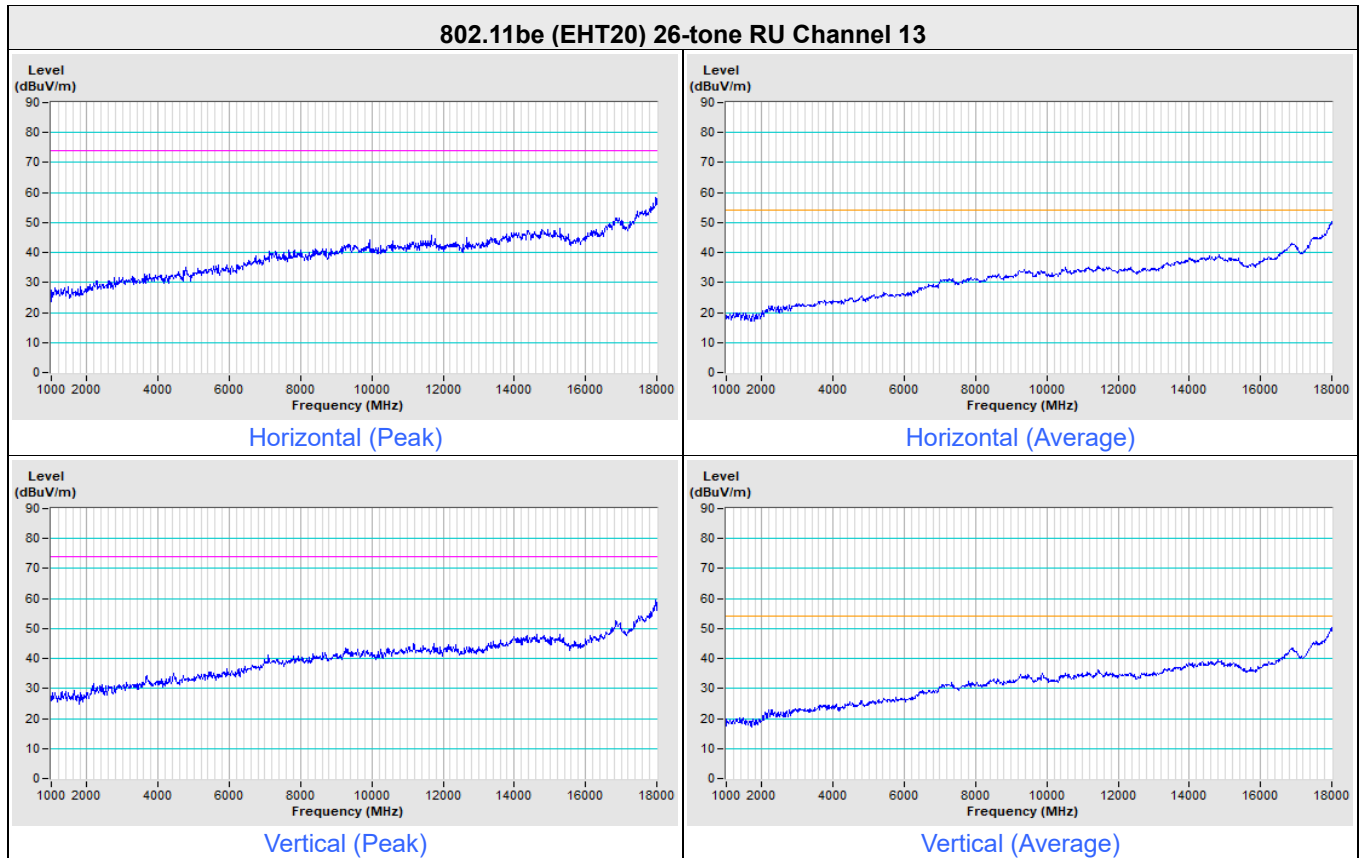

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---