



RADIO TEST REPORT

FCC ID : RAXAIOS7
Equipment : HEOS 7.0 Platform Module, HEOS 7.0 Platform
Module Type DH
Brand Name : Arcadyan
Model Name : WN9722OAX22-DM (AIOS7.0), WN9722HAX22-DM
(AIOS7.0-DH)
Applicant : Arcadyan Technology Corporation
No.8, Sec.2, Guangfu Rd., Hsinchu, 30071 Taiwan
Manufacturer : Arcadyan Technology Corporation
No.8, Sec.2, Guangfu Rd., Hsinchu, 30071 Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Mar. 19, 2024, and testing was started from Mar. 25, 2024 and completed on Jun. 26, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	12
1.3 Testing Location Information	12
1.4 Measurement Uncertainty	13
2 Test Configuration of EUT.....	14
2.1 Test Channel Mode	14
2.2 The Worst Case Measurement Configuration.....	16
2.3 EUT Operation during Test	17
2.4 Accessories	17
2.5 Support Equipment.....	18
2.6 Test Setup Diagram	19
3 Transmitter Test Result	22
3.1 AC Power-line Conducted Emissions	22
3.2 Unwanted Emissions.....	24
4 Test Equipment and Calibration Data	28
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Unwanted Emissions	
Appendix C. Test Photos	
Appendix D. Photographs of EUT	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4

Page Number : 3 of 30
Issued Date : Jul. 17, 2025
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(b)	Unwanted Emissions	PASS	-
Note: Reference to Sporton Project No.: 320110-03				

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Vicky Huang



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	2TX
5.15-5.25GHz	802.11n HT20	20	2TX
5.15-5.25GHz	802.11ac VHT20	20	2TX
5.15-5.25GHz	802.11ax HEW20	20	2TX
5.15-5.25GHz	802.11n HT40	40	2TX
5.15-5.25GHz	802.11ac VHT40	40	2TX
5.15-5.25GHz	802.11ax HEW40	40	2TX
5.15-5.25GHz	802.11ac VHT80	80	2TX
5.15-5.25GHz	802.11ax HEW80	80	2TX
5.25-5.35GHz	802.11a	20	2TX
5.25-5.35GHz	802.11n HT20	20	2TX
5.25-5.35GHz	802.11ac VHT20	20	2TX
5.25-5.35GHz	802.11ax HEW20	20	2TX
5.25-5.35GHz	802.11n HT40	40	2TX
5.25-5.35GHz	802.11ac VHT40	40	2TX
5.25-5.35GHz	802.11ax HEW40	40	2TX
5.25-5.35GHz	802.11ac VHT80	80	2TX
5.25-5.35GHz	802.11ax HEW80	80	2TX



Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11a	20	2TX
5.47-5.725GHz	802.11n HT20	20	2TX
5.47-5.725GHz	802.11ac VHT20	20	2TX
5.47-5.725GHz	802.11ax HEW20	20	2TX
5.47-5.725GHz	802.11n HT40	40	2TX
5.47-5.725GHz	802.11ac VHT40	40	2TX
5.47-5.725GHz	802.11ax HEW40	40	2TX
5.47-5.725GHz	802.11ac VHT80	80	2TX
5.47-5.725GHz	802.11ax HEW80	80	2TX
5.725-5.85GHz	802.11a	20	2TX
5.725-5.85GHz	802.11n HT20	20	2TX
5.725-5.85GHz	802.11ac VHT20	20	2TX
5.725-5.85GHz	802.11ax HEW20	20	2TX
5.725-5.85GHz	802.11n HT40	40	2TX
5.725-5.85GHz	802.11ac VHT40	40	2TX
5.725-5.85GHz	802.11ax HEW40	40	2TX
5.725-5.85GHz	802.11ac VHT80	80	2TX
5.725-5.85GHz	802.11ax HEW80	80	2TX

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 and VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40 and HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Set	Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)			
							2.4GHz	5GHz	6GHz	Bluetooth
1	1	1	WIESON	ARY196-0383-005-00	Dipole Antenna	I-PEX	-	-	-	2.1
	2	1	WIESON	ARY196-0383-006-00	Dipole Antenna	I-PEX	2.2	2.7	2.8	-
	3	2	WIESON	ARY196-0383-007-00	Dipole Antenna	I-PEX	1.7	1.6	1.7	-
2	1	1	WIESON	ARY196-0383-008-00	Dipole Antenna	I-PEX	-	-	-	1.7
	2	1	WIESON	ARY196-0383-009-00	Dipole Antenna	I-PEX	2.0	2.2	2.3	-
	3	2	WIESON	ARY196-0383-010-00	Dipole Antenna	I-PEX	1.1	1.0	0.9	-
3	1	1	WIESON	ARY196-0383-034-H0	PCB Antenna	I-PEX	-	-	-	2.84
	2	1	WIESON	ARY196-0383-035-H0	PCB Antenna	I-PEX	2.8	3.82	4.16	-
	3	2	WIESON	ARY196-0383-036-H0	PCB Antenna	I-PEX	2.66	3.78	4.23	-
4	1	1	WIESON	ARY196-0383-039-H0	PCB Antenna	I-PEX	-	-	-	2.75
	2	1	WIESON	ARY196-0383-037-H0	PCB Antenna	I-PEX	2.14	2.18	2.26	-
	3	2	WIESON	ARY196-0383-038-H0	PCB Antenna	I-PEX	2.54	3.38	3.75	-
5	1	1	WIESON	ARY196-0383-042-H0	PCB Antenna	I-PEX	-	-	-	1.82
	2	1	WIESON	ARY196-0383-040-H0	PCB Antenna	I-PEX	1.97	1.9	2.46	-
	3	2	WIESON	ARY196-0383-041-H0	PCB Antenna	I-PEX	1.15	2.85	3.5	-
6	1	1	INPAQ	WA-P-LA-01-106	PCB Antenna	I-PEX	-	-	-	2.98
	2	1	INPAQ	WA-P-LE-03-039	PCB Antenna	I-PEX	2.74	3.42	3.67	-
	3	2	INPAQ	WA-P-LE-02-353	PCB Antenna	I-PEX	4.78	5.45	4.64	-



7	1	1	INPAQ	WA-P-LA-01-107	PCB Antenna	I-PEX	-	-	-	3.4
	2	1	INPAQ	WA-P-LE-02-378	PCB Antenna	I-PEX	3.36	2.39	2.62	-
	3	2	INPAQ	WA-P-LE-03-041	PCB Antenna	I-PEX	2.53	5.87	4.69	-
8	1	1	INPAQ	WA-P-LA-01-108	PCB Antenna	I-PEX	-	-	-	3.04
	2	1	INPAQ	WA-P-LE-02-380	PCB Antenna	I-PEX	5.46	5.75	7.1	-
	3	2	INPAQ	WA-P-LE-03-042	PCB Antenna	I-PEX	5.41	6.09	6.67	-

Note1: The above information was declared by manufacturer.

Note2: The EUT has eight sets of antennas and there are three antennas for each set.

For EUT 1~2:

Set 1~2 are the same type antenna.

Only the highest gain Set 1 antenna was selected to test and record in original report.

For EUT 3:

Set 3~8 are the same type antenna.

Only the highest gain Set 8 antenna for WLAN and Set 7 antenna for Bluetooth was selected to test and record in this report.

Note3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left(\sum_{k=1}^{N_{ant}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left(\sum_{k=1}^{N_{ant}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left(\sum_{k=1}^{N_{ant}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left(\sum_{k=1}^{N_{ant}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

For Set 1~2:

2.4G G1= 2.2 dBi; G2= 1.7 dBi; DG= 4.96dBi

5G G1= 2.7 dBi; G2= 1.6 dBi; DG= 5.18dBi

6G G1= 2.8 dBi; G2= 1.7 dBi; DG= 5.28dBi

For Set 3~8:

2.4G G1= 5.46 dBi; G2= 5.41 dBi; DG = 8.45 dBi

5G G1 = 5.75 dBi; G2 = 6.09 dBi; DG = 8.93 dBi

For 2.4GHz function:

For IEEE 802.11b/g/n/VHT/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Bluetooth function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.801	0.96	2.757m	500
802.11ax HEW20_Nss 1,(M0)	0.736	1.33	1.966m	1k
802.11ax HEW40_Nss 1,(M0)	0.736	1.33	1.963m	1k
802.11ax HEW80_Nss 1,(M0)	0.554	2.56	967.5u	2k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	Form host system			
Beamforming Function	☐	With beamforming	☒	Without beamforming
Weather Band	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
Function	☐	Outdoor P2M	☐	Indoor P2M
	☐	Fixed P2P	☒	Client
	☒	Point-to-multipoint	☐	Point-to-point
TPC Function	☐	With TPC	☒	Without TPC
Channel Puncturing Function	☐	Supported	☒	Unsupported
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	DOS [ver 6.1.7601]			

Note: The above information was declared by manufacturer.



1.1.5 Table for EUT Information

The EUTs are identical to each other in all aspects except for the following table:

EUT	Equipment Name	Model Name	GPIO Source	The Material of the Shielded Case	Set Ant.
1	HEOS 7.0 Platform Module	WN9722OAX22-DM (AIOS7.0)	Main	Tinplate	1~2
2				Stainless steel	1~2
3	HEOS 7.0 Platform Module Type DH	WN9722HAX22-DM (AIOS7.0-DH)	Second	Stainless steel	3~8

Note1: From the above, EUT 2 has selected to execute the Unwanted Emissions below 1GHz and Unwanted Emissions above 1GHz-11ax HEW80 5290MHz test and EUT 3 has selected to execute the AC power-line conducted emissions and Unwanted Emissions tests.

Note2: The above information was declared by manufacturer.

1.1.6 Source Table

Item \ Source	Main	Second
GPIO	-	Disconnect one of its GPIO6 pins and route GPIO3 to the pin out instead, with corresponding changes made to the layout.

Note: The above information was declared by manufacturer.

1.1.7 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR320110AD

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding the EUT 2 (Please refer to section 1.1.5 for detailed information)	1. Unwanted Emissions below 1GHz 2. 11ax HEW80 5290MHz generated the worst case from original, thus only test 11ax HEW80 5290MHz for below item: Unwanted Emissions above 1GHz
2. Adding the EUT 3 (Equipment Name: HEOS 7.0 Platform Module Type DH / Model Name: WN9722HAX22-DM (AIOS7.0-DH)) (Please refer to section 1.1.5 for detailed information) 3. Adding the Set 3~8 antenna for EUT 3 use (Please refer to section 1.1.2 and section 1.1.5 for detailed information)	1. AC Power-line Conducted Emissions 2. Unwanted Emissions

Note: The above test items will be based on original output power to re-test.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
Radiated (Below 1GHz- Test Mode: Mode 1)	03CH05-CB	Roy Mai	21.9-22.4 / 55-58	Mar. 25, 2024
Radiated (Below 1GHz- Test Mode: Mode 2~4)	03CH03-CB	Edmund Tsai	21.6~23.1 / 58~62	Apr. 24, 2025
Radiated (Above 1GHz- Test Mode: Mode 1)	03CH05-CB	Jackson Peng	21.9-22.4 / 55-58	Mar. 26, 2024~ Mar. 28, 2024
	03CH06-CB	Jackson Peng	21.4-22.5 / 55-58	
Radiated (Above 1GHz- Test Mode: Mode 2)	03CH01-CB	Stim Sung	22.1-23.1 / 60-62	Apr. 29, 2025~ Jun. 26, 2025
AC Conduction	CO01-CB	Tim Chen	20~21 / 58~60	Apr. 29, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

For Radiated(Below 1GHz-Test Mode: Mode 1) and Radiated(Above 1GHz-Test Mode: Mode 1)

Test Items	Uncertainty	Remark
Radiated Emission (9kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%

For other tests:

Test Date: Before May 28, 2025

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%

Test Date: After May 27, 2025

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11a_Nss1,(6Mbps)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW20_Nss1,(MCS0)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW40_Nss1,(MCS0)_2TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11ax HEW80_Nss1,(MCS0)_2TX



5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz

Note:

- ♦ Evaluated HEW20/HEW40/HEW80 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80 mode are the same or lower than HEW20/HEW40/HEW80.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT 3 + 2.4GHz with antenna set 8 + Bluetooth with antenna set 7
2	EUT 3 + 5GHz with antenna set 8 + Bluetooth with antenna set 7
3	EUT 3 + 6GHz with antenna set 8 + Bluetooth with antenna set 7
For operating mode 3 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1. After evaluating, the worst case was found at Y axis, thus the measurement will follow this same test configuration. 2. For mode 1: There are three modes of EUT: 2.4GHz + Bluetooth, 5GHz + Bluetooth, and 6GHz + Bluetooth. 2.4GHz + Bluetooth mode has been evaluated to be the worst case after evaluating. So the measurement will follow this same test configuration.	
1	EUT 2 at Y axis with antenna set 1 + 2.4GHz + Bluetooth
2	EUT 3 at Y axis + 2.4GHz with antenna set 8 + Bluetooth with antenna set 7
3	EUT 3 at Y axis + 5GHz with antenna set 8 + Bluetooth with antenna set 7
4	EUT 3 at Y axis + 6GHz with antenna set 8 + Bluetooth with antenna set 7
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found as below. So the measurement will follow this same test configuration.	
1	EUT 2 at X axis with antenna set 1 + 5GHz (only 11ax HEW80 5290MHz test)
2	EUT 3 at Y axis with antenna set 8 + 5GHz



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	EUT 1-WLAN 2.4GHz + Bluetooth
2	EUT 1-WLAN 5GHz + Bluetooth
3	EUT 1-WLAN 6GHz + Bluetooth
4	EUT 3-WLAN 2.4GHz + Bluetooth
5	EUT 3-WLAN 5GHz + Bluetooth
6	EUT 3-WLAN 6GHz + Bluetooth
Refer to Sporton Test Report No.: FA320110-06 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

N/A



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Test Fixture	Arcadyan	N0IDM9922001J	N/A
B	LAN PC	ASUS	S300TA	TX2-RTL8821CE
C	Wireless Connectivity Tester	R&S	CMW270	N/A
D	AP Router	ASUS	GT-AXE16000	MSQ-RTAX5D00
E	AP PC	ASUS	S300TA	TX2-RTL8821CE
F	Test Fixture	MASIMO HEOS	AIOS7 LPP	N/A
G	AC Adapter	APD	WA-30P12FU	N/A


For Radiated (below 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Test Fixture	Arcadyan	N0IDM9922001J	N/A
B	NB	DELL	E4300	N/A
C	BT Test Set	Anritsu	MT8852B	N/A
D	WLAN AP	ASUS	RT-AX88U	N/A
E	NB	DELL	E4300	N/A
F	Test Fixture	MASIMO HEOS	AIOS7 LPP	N/A

For Radiated (above 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Test Fixture	Arcadyan	N0IDM9922001J	N/A
C	Test Fixture	MASIMO HEOS	AIOS7 LPP	N/A

2.6 Test Setup Diagram

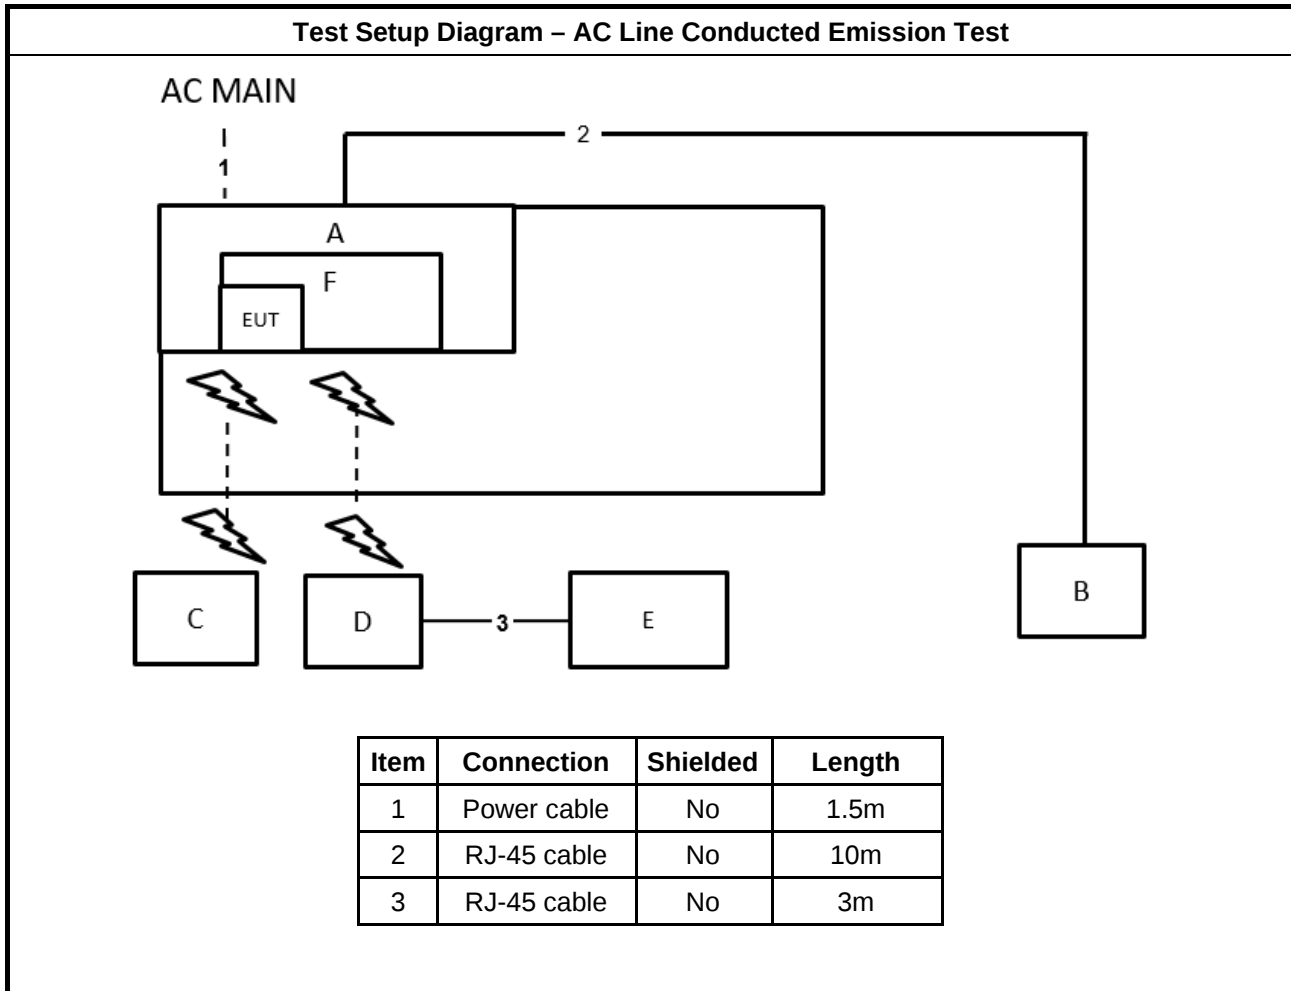

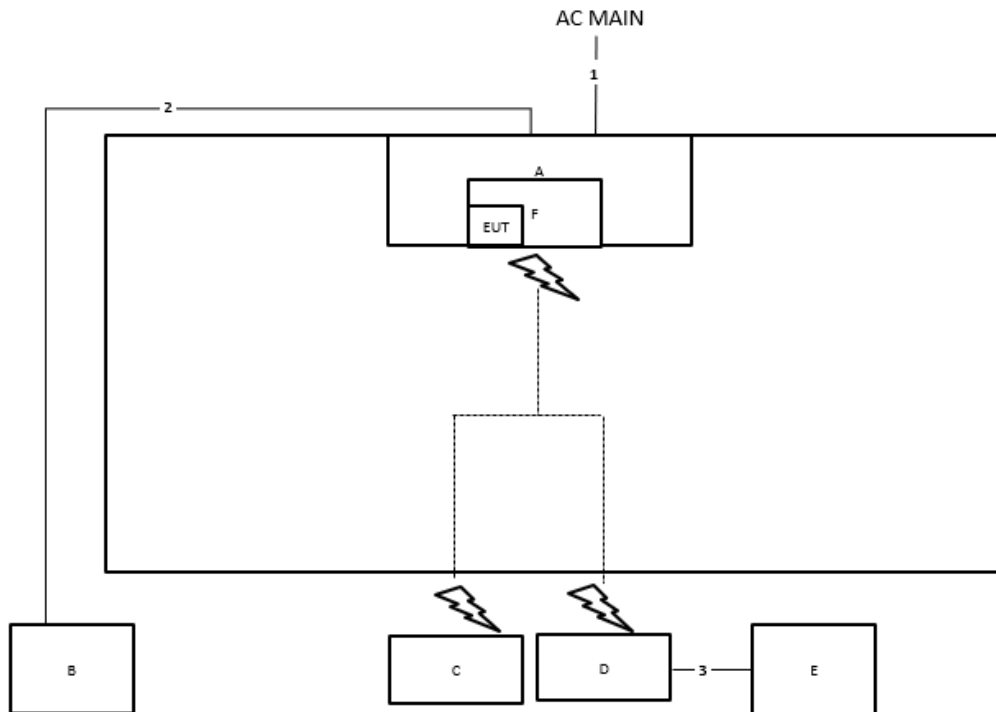Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m

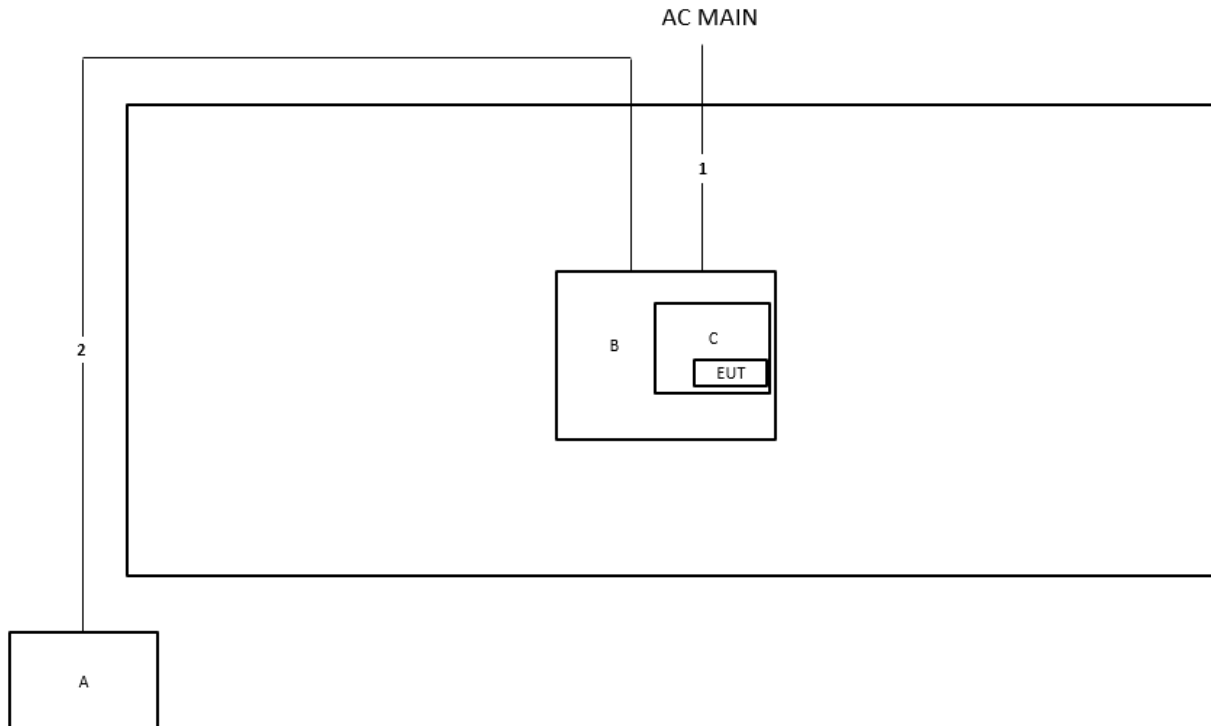Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

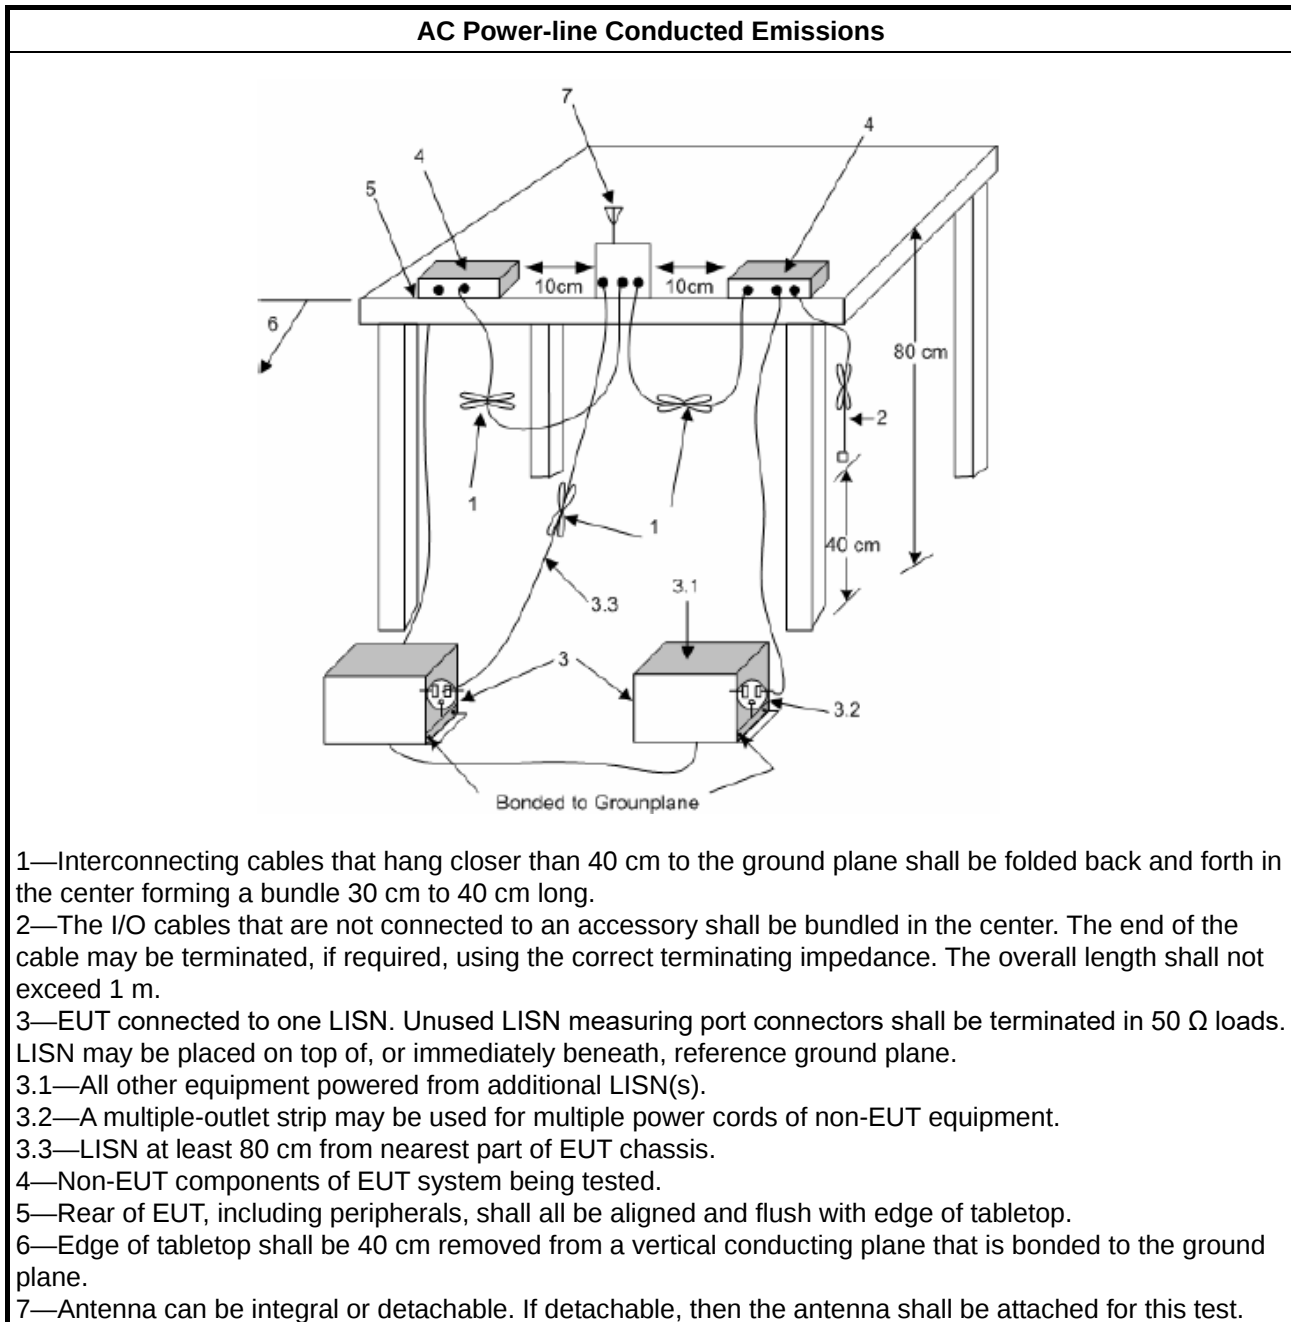

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



3.2 Unwanted Emissions

3.2.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).




3.2.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.	
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.2.4 Test Setup

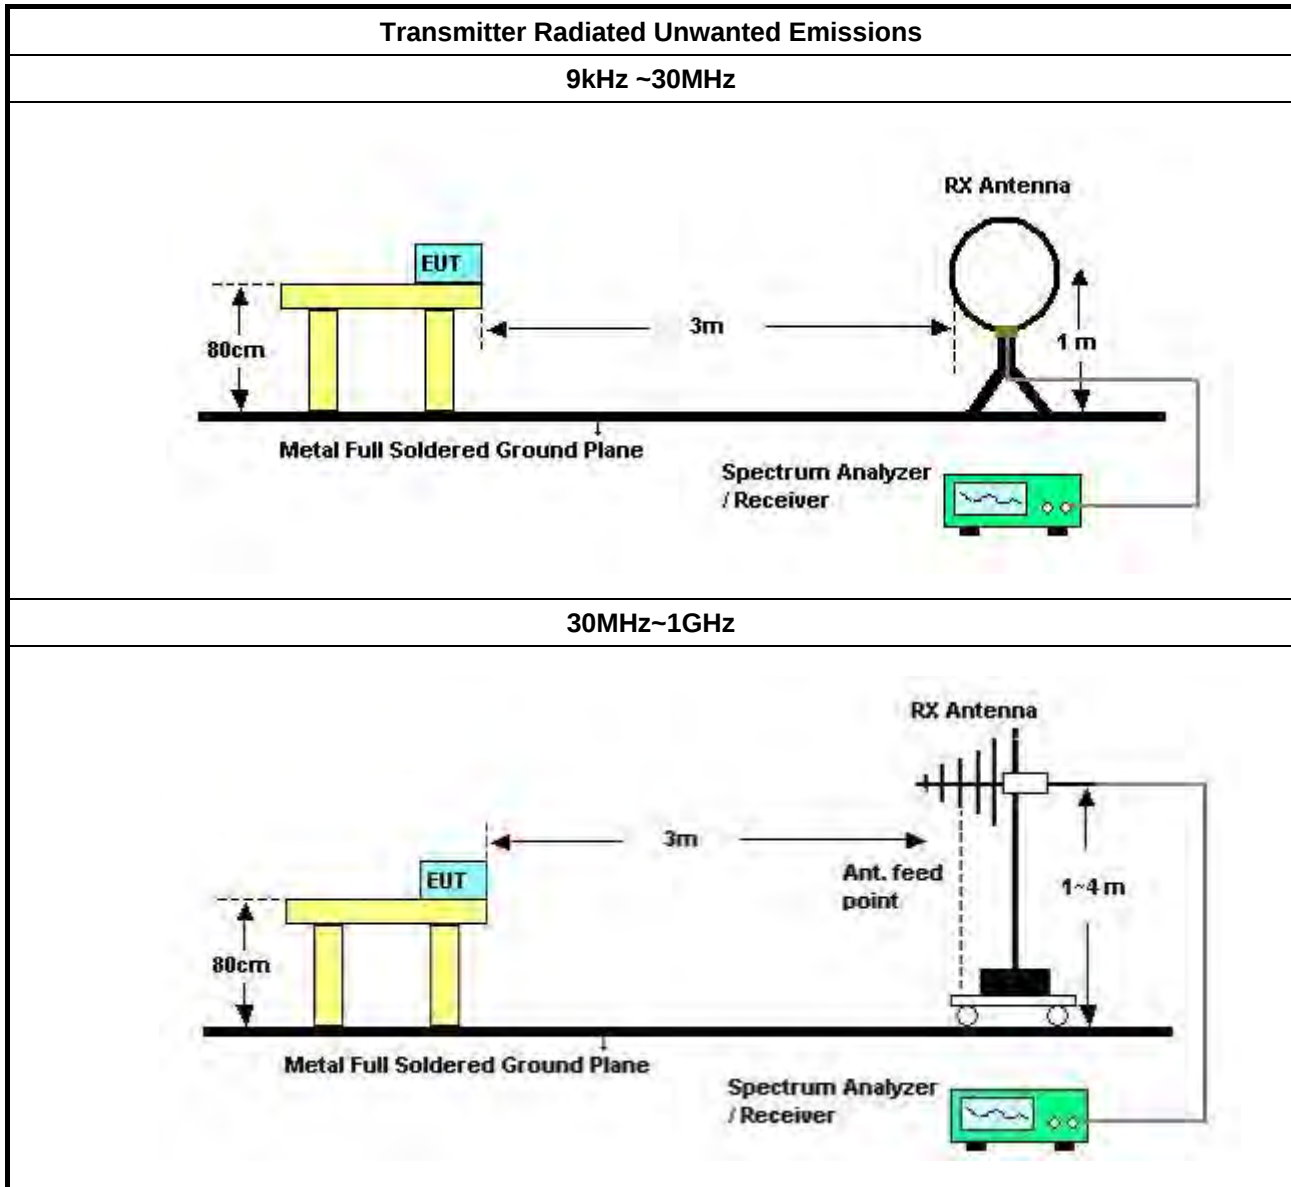

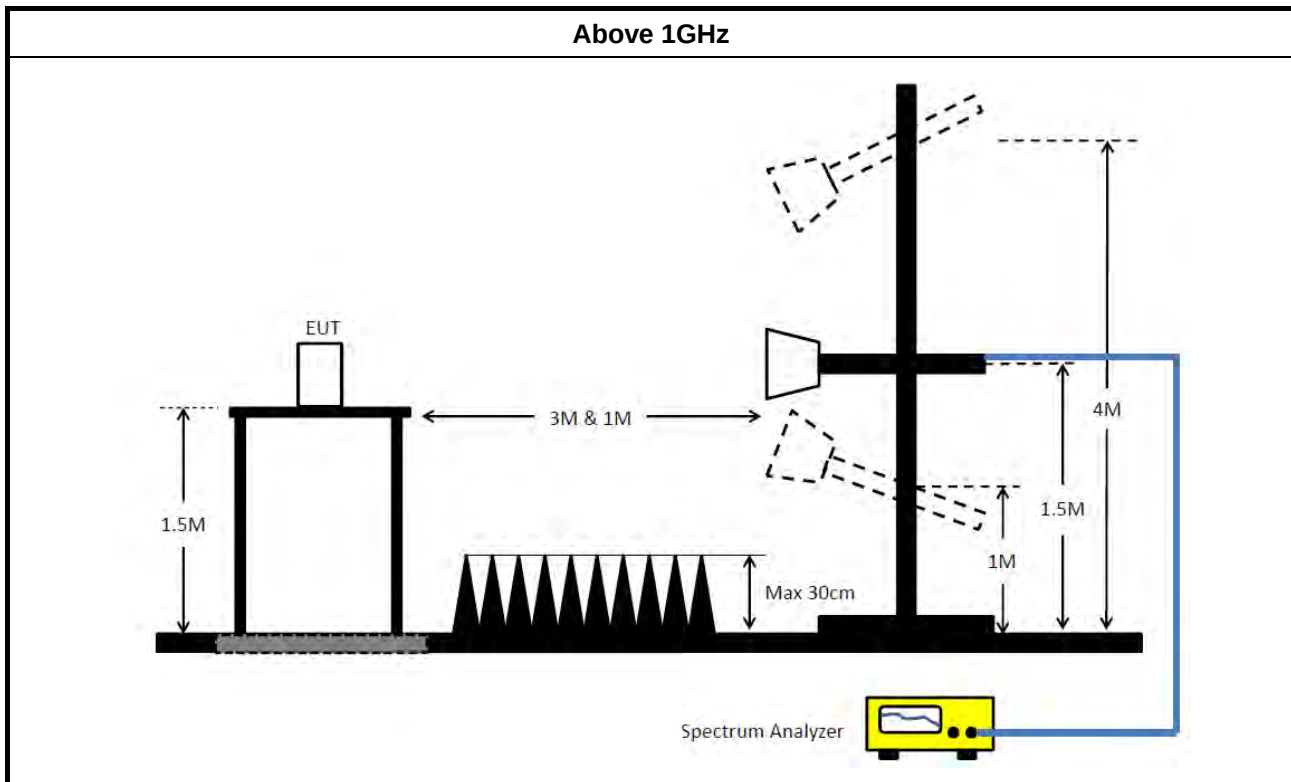

3.2.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.2.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.2.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix B



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-5 0-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Feb. 06, 2025	Feb. 05, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 13, 2023	Oct. 12, 2024	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 02, 2023	Aug. 01, 2024	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 29, 2023	Sep. 28, 2024	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 23, 2024	Mar. 22, 2025	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120 D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 08, 2023	Jun. 07, 2024	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 04, 2023	Sep. 03, 2024	Radiation (03CH05-CB)
Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 03, 2023	May 02, 2024	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630 SE	980287	1GHz ~ 26.5GHz	Jun. 30, 2023	Jun. 29, 2024	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 24, 2023	Nov. 23, 2024	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 18, 2023	Apr. 17, 2024	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 13, 2023	Jun. 12, 2024	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Dec. 06, 2023	Dec. 05, 2024	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-154 07_NII	V5.11. 23	5.15GHz- 7.115GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120 D	BBHA 9120D-1292	1GHz~18GHz	Jul. 31, 2023	Jul. 30, 2024	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 04, 2023	Sep. 03, 2024	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	Aug. 01, 2023	Jul. 31, 2024	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	Apr. 21, 2023	Apr. 20, 2024	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-154 07_NII	V5.11. 23	5.15GHz- 7.115GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 17, 2024	Oct. 16, 2025	Radiation (03CH03-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH03-CB	30MHz ~ 1 GHz	Jan. 17, 2025	Jan. 16, 2026	Radiation (03CH03-CB)
Bilog Antenna with 6dB Attenuator	Schaffner & EMCI	CBL6112B& N-6-06	2888&AT-N060 5	30MHz ~ 1GHz	Jan. 17, 2025	Jan. 16, 2026	Radiation (03CH03-CB)
Amplifier	SGH	SGH301	20240606-1	30MHz ~ 1GHz	Jun. 04, 2024	Jun. 03, 2025	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 11, 2024	Jul. 10, 2025	Radiation (03CH03-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH03-CB)
RF Cable-low	Woken	RG402	Low Cable-02+29	30MHz ~ 1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 04, 2024	May 03, 2025	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Oct. 18, 2024	Oct. 17, 2025	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 17, 2024	May 16, 2025	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2024	Dec. 11, 2025	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-154 07_NII	V5.11. 23	5.15GHz- 7.115GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 3	Pass	QP	154.5k	50.98	65.75	-14.77	Line

Mode 3

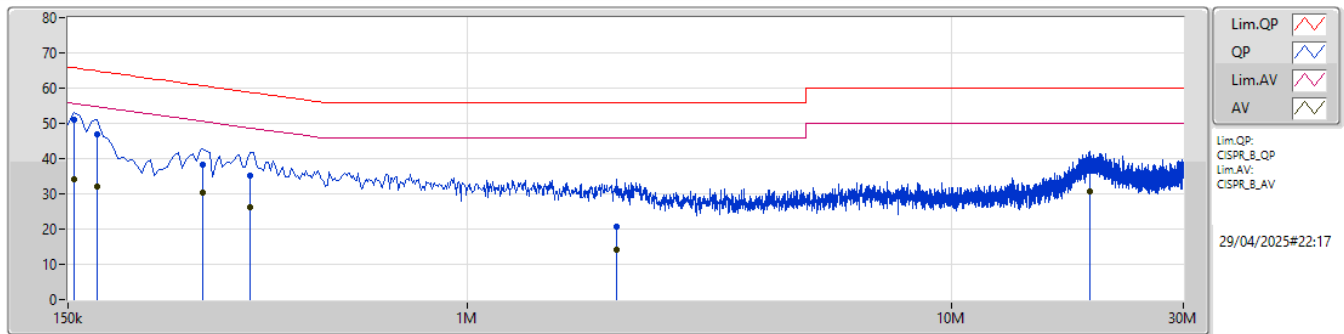

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	50.98	65.75	-14.77	10.04	Line	"Worst"	40.94	0.04	0.08	9.92						
AV	154.5k	34.01	55.75	-21.74	10.04	Line	-	23.97	0.04	0.08	9.92						
QP	172.5k	46.86	64.83	-17.97	10.04	Line	-	36.82	0.04	0.07	9.93						
AV	172.5k	32.23	54.83	-22.60	10.04	Line	-	22.19	0.04	0.07	9.93						
QP	285k	38.23	60.67	-22.44	10.14	Line	-	28.09	0.04	0.09	10.01						
AV	285k	30.21	50.67	-20.46	10.14	Line	-	20.07	0.04	0.09	10.01						
QP	357k	35.10	58.79	-23.69	10.18	Line	-	24.92	0.04	0.10	10.04						
AV	357k	26.27	48.79	-22.52	10.18	Line	-	16.09	0.04	0.10	10.04						
QP	2.031M	20.79	56.00	-35.21	10.18	Line	-	10.61	0.09	0.14	9.95						
AV	2.031M	14.03	46.00	-31.97	10.18	Line	-	3.85	0.09	0.14	9.95						
QP	19.262M	37.39	60.00	-22.61	10.57	Line	-	26.82	0.31	0.32	9.94						
AV	19.262M	30.53	50.00	-19.47	10.57	Line	-	19.96	0.31	0.32	9.94						

Mode 3

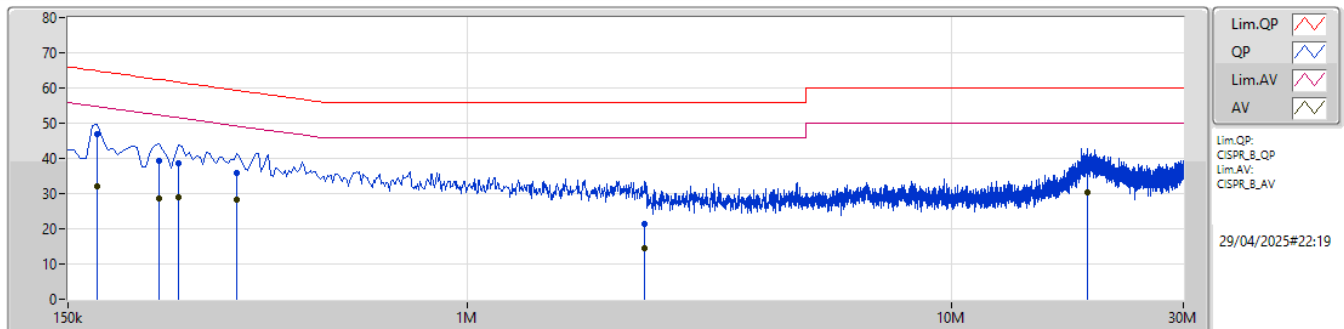

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	172.5k	46.86	64.83	-17.97	10.04	Neutral	"Worst"	36.82	0.04	0.07	9.93						
AV	172.5k	32.24	54.83	-22.59	10.04	Neutral	-	22.20	0.04	0.07	9.93						
QP	231k	39.32	62.41	-23.09	10.09	Neutral	-	29.23	0.04	0.08	9.97						
AV	231k	28.61	52.41	-23.80	10.09	Neutral	-	18.52	0.04	0.08	9.97						
QP	253.5k	38.51	61.64	-23.13	10.11	Neutral	-	28.40	0.04	0.08	9.99						
AV	253.5k	29.01	51.64	-22.63	10.11	Neutral	-	18.90	0.04	0.08	9.99						
QP	334.5k	35.71	59.35	-23.64	10.16	Neutral	-	25.55	0.04	0.09	10.03						
AV	334.5k	28.12	49.35	-21.23	10.16	Neutral	-	17.96	0.04	0.09	10.03						
QP	2.324M	21.48	56.00	-34.52	10.15	Neutral	-	11.33	0.07	0.14	9.94						
AV	2.324M	14.56	46.00	-31.44	10.15	Neutral	-	4.41	0.07	0.14	9.94						
QP	18.987M	37.31	60.00	-22.69	10.58	Neutral	-	26.73	0.33	0.31	9.94						
AV	18.987M	30.39	50.00	-19.61	10.58	Neutral	-	19.81	0.33	0.31	9.94						




Radiated Emissions below 1GHz

Appendix B.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	44.55M	36.99	40.00	-3.01	Vertical

Mode 1

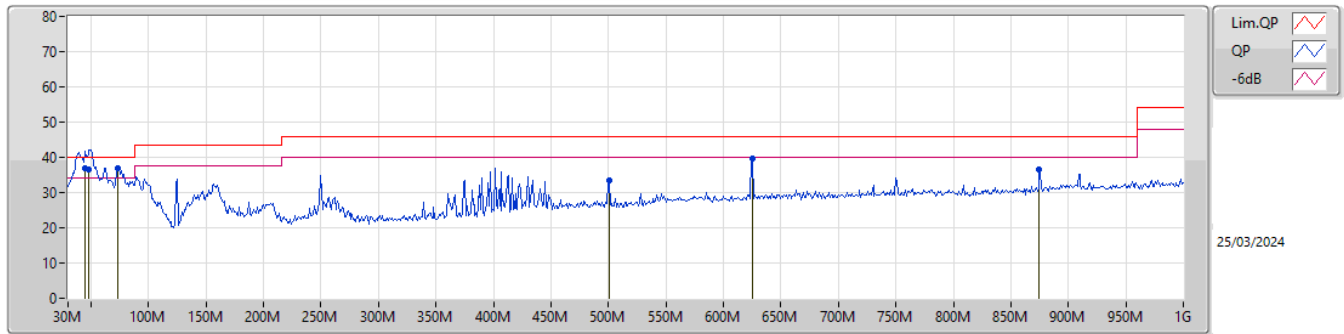

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)		
QP	44.55M	36.99	40.00	-3.01	-13.96	3	Vertical	249	1.00	"Worst"	50.95	16.63	1.22	31.81		
QP	48.43M	36.68	40.00	-3.32	-15.68	3	Vertical	161	1.00	-	52.36	14.92	1.26	31.86		
QP	73.65M	36.95	40.00	-3.05	-17.77	3	Vertical	284	1.00	-	54.72	12.64	1.52	31.93		
PK	500.45M	33.39	46.00	-12.61	-4.84	3	Vertical	38	1.25	-	38.23	23.26	4.17	32.27		
PK	625.58M	39.68	46.00	-6.32	-3.18	3	Vertical	156	1.00	-	42.86	24.64	4.72	32.54		
PK	874.87M	36.45	46.00	-9.55	-0.56	3	Vertical	346	1.50	-	37.01	26.26	5.72	32.54		

Mode 1

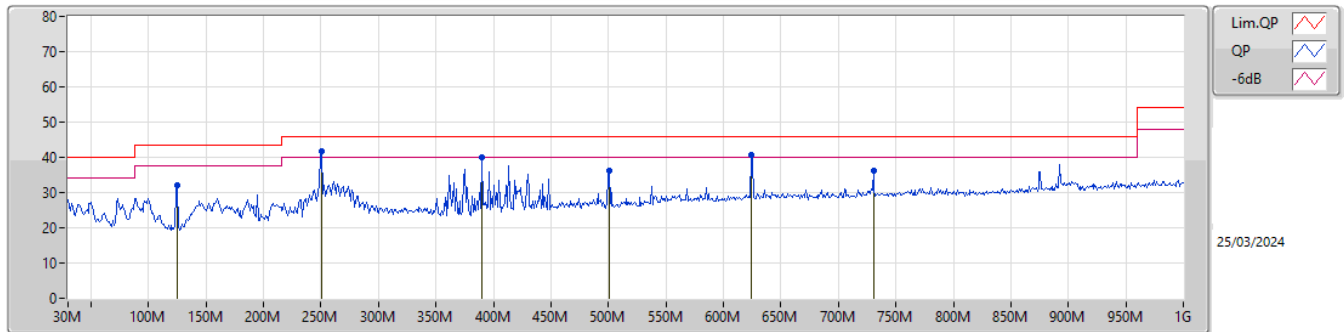

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)		
PK	125.06M	32.21	43.50	-11.29	-11.82	3	Horizontal	287	3.00	-	44.03	18.19	1.97	31.98		
PK	250.19M	41.62	46.00	-4.38	-10.94	3	Horizontal	202	1.25	"Worst"	52.56	18.27	2.83	32.04		
PK	389.87M	39.87	46.00	-6.13	-7.44	3	Horizontal	124	1.00	-	47.31	21.09	3.64	32.17		
PK	500.45M	36.09	46.00	-9.91	-4.84	3	Horizontal	122	2.00	-	40.93	23.26	4.17	32.27		
PK	624.61M	40.70	46.00	-5.30	-3.18	3	Horizontal	25	2.00	-	43.88	24.64	4.71	32.53		
PK	730.34M	36.24	46.00	-9.76	-2.18	3	Horizontal	68	2.00	-	38.42	25.29	5.15	32.62		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	AV	15.85674G	48.69	54.00	-5.31	3	Horizontal	346	1.29	-

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

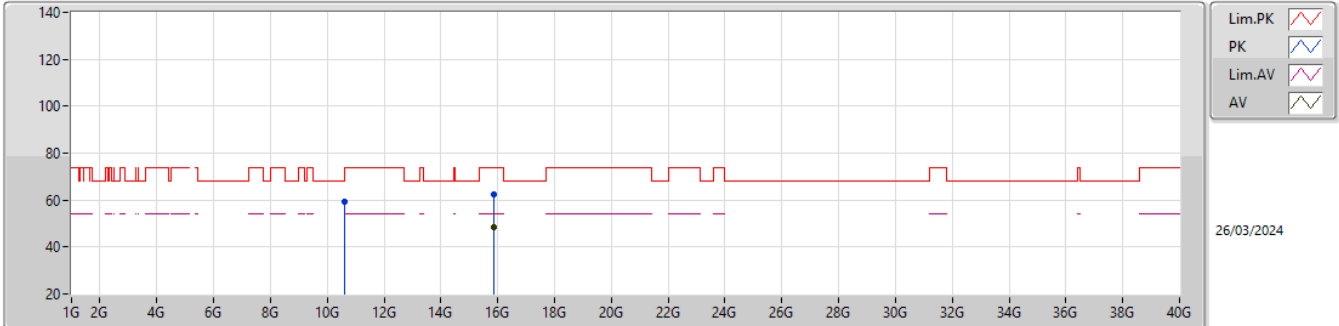


EUT_X_2TX
Setting 17
06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59458G	59.40	68.20	-8.80	41.63	3	Vertical	90	2.81	-	40.19	10.14	32.56			
PK	15.86004G	62.47	74.00	-11.53	44.68	3	Vertical	149	1.95	-	38.08	12.60	32.89			
AV	15.8565G	48.63	54.00	-5.37	30.83	3	Vertical	149	1.95	-	38.09	12.60	32.89			

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

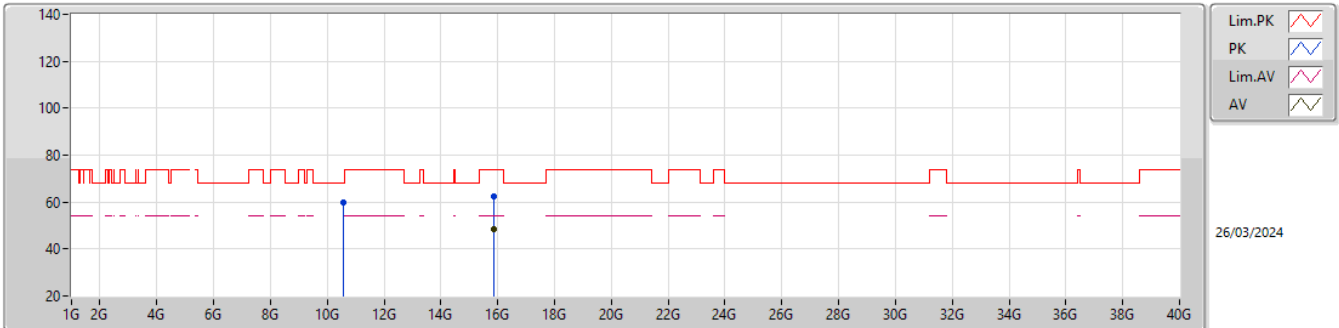

EUT_X_2TX
Setting 17
06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57988G	59.80	68.20	-8.40	42.06	3	Horizontal	83	2.36	-	40.16	10.14	32.56			
PK	15.86238G	62.44	74.00	-11.56	44.65	3	Horizontal	346	1.29	-	38.08	12.60	32.89			
AV	15.85674G	48.69	54.00	-5.31	30.89	3	Horizontal	346	1.29	-	38.09	12.60	32.89			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	PK	5.465G	64.70	68.20	-3.50	3	Horizontal	330	1.80	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

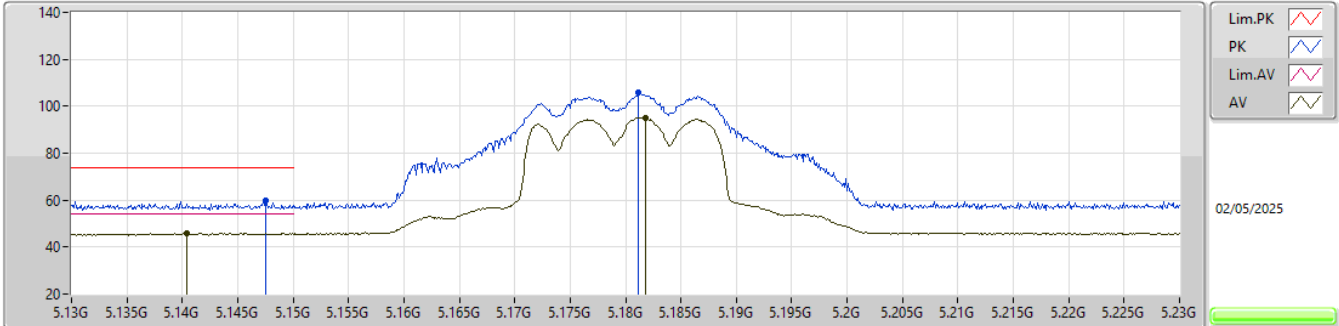


EUT Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1475G	59.97	74.00	-14.03	53.08	3	Vertical	9	2.91	-	32.79	6.64	32.54				
AV	5.1404G	45.83	54.00	-8.17	38.96	3	Vertical	9	2.91	-	32.78	6.64	32.55				
PK	5.1812G	105.61	Inf	-Inf	98.66	3	Vertical	9	2.91	-	32.86	6.63	32.54				
AV	5.1818G	95.23	Inf	-Inf	88.28	3	Vertical	9	2.91	-	32.86	6.63	32.54				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

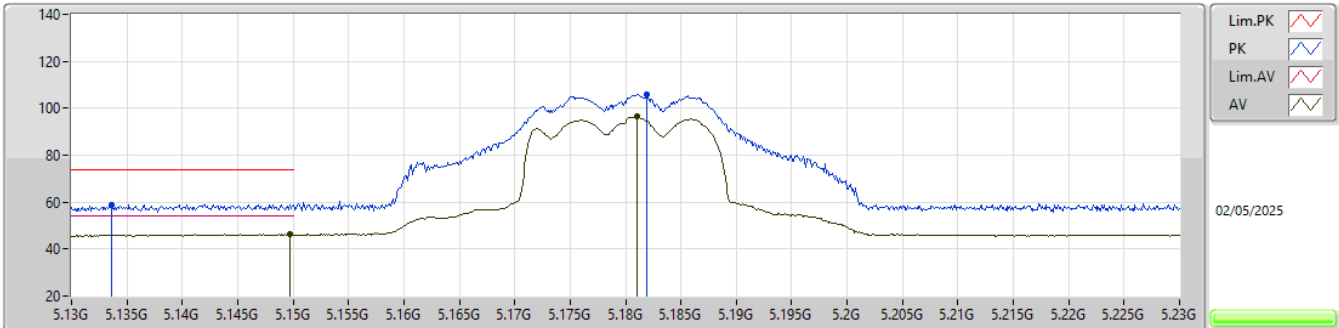


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1336G	59.01	74.00	-14.99	52.15	3	Horizontal	10	1.80	-	32.77	6.64	32.55					
AV	5.1497G	46.27	54.00	-7.73	39.37	3	Horizontal	10	1.80	-	32.80	6.64	32.54					
PK	5.1819G	105.88	Inf	-Inf	98.93	3	Horizontal	10	1.80	-	32.86	6.63	32.54					
AV	5.181G	96.45	Inf	-Inf	89.50	3	Horizontal	10	1.80	-	32.86	6.63	32.54					

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

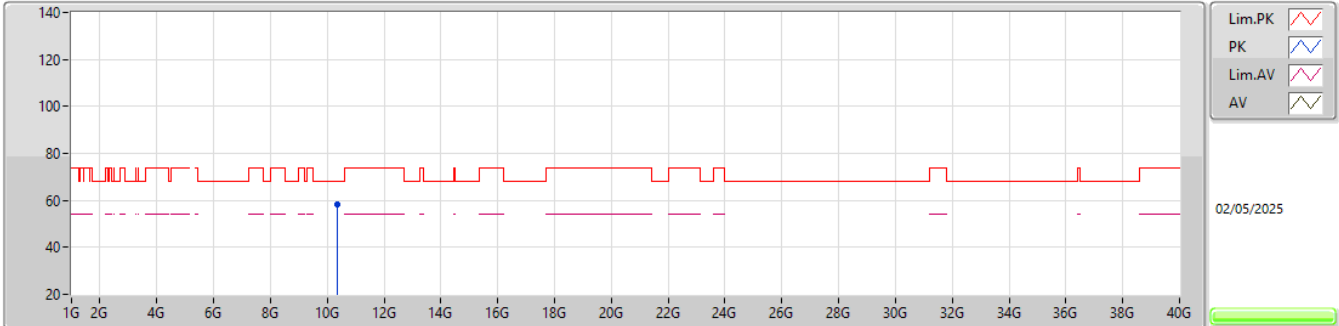


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.3593G	58.43	68.20	-9.77	41.50	3	Vertical	343	1.63	-	38.78	10.69	32.54				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

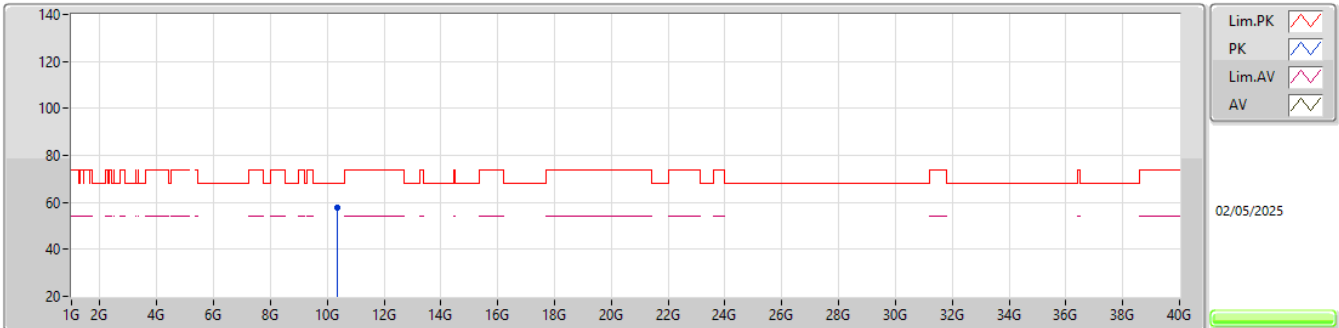


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36059G	57.95	68.20	-10.25	41.02	3	Horizontal	247	1.86	-	38.78	10.69	32.54			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

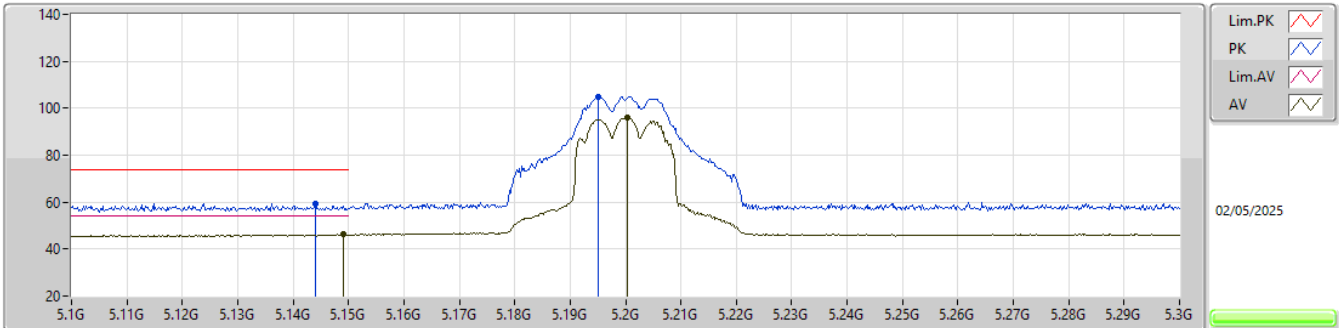


EUT Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.144G	59.46	74.00	-14.54	52.58	3	Vertical	341	2.65	-	32.79	6.64	32.55			
AV	5.149G	46.26	54.00	-7.74	39.36	3	Vertical	341	2.65	-	32.80	6.64	32.54			
PK	5.195G	104.98	Inf	-Inf	97.99	3	Vertical	341	2.65	-	32.89	6.63	32.53			
AV	5.2004G	96.17	Inf	-Inf	89.17	3	Vertical	341	2.65	-	32.90	6.63	32.53			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

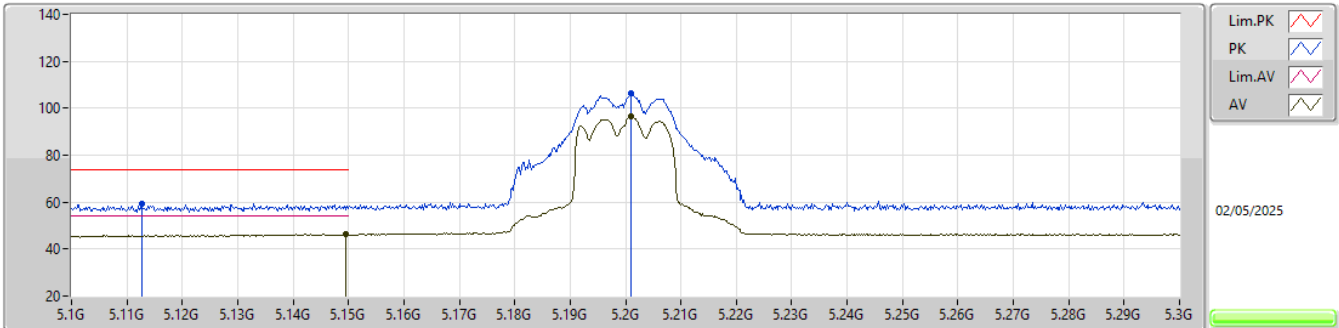


EUT Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1126G	59.25	74.00	-14.75	52.42	3	Horizontal	9	1.80	-	32.73	6.65	32.55				
AV	5.1496G	46.29	54.00	-7.71	39.39	3	Horizontal	9	1.80	-	32.80	6.64	32.54				
PK	5.201G	106.21	Inf	-Inf	99.21	3	Horizontal	9	1.80	-	32.90	6.63	32.53				
AV	5.201G	96.31	Inf	-Inf	89.31	3	Horizontal	9	1.80	-	32.90	6.63	32.53				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

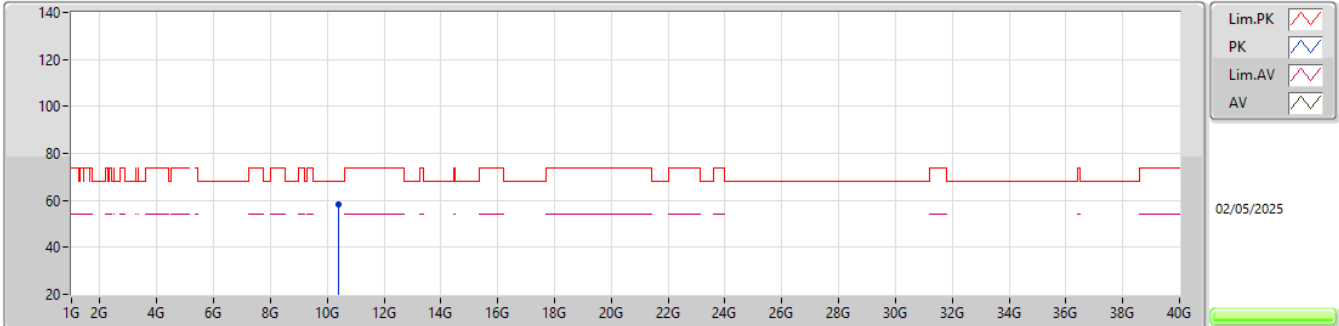


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.39995G	58.40	68.20	-9.80	41.47	3	Vertical	195	2.67	-	38.70	10.73	32.50				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

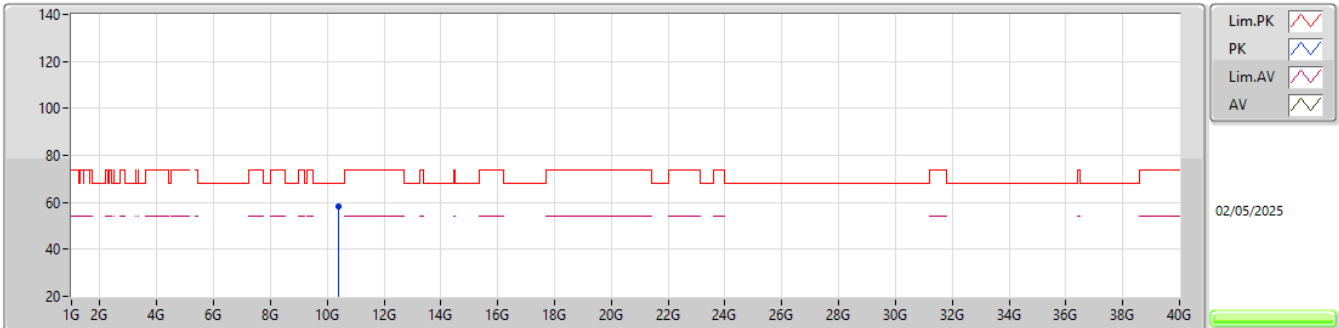


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.39927G	58.25	68.20	-9.95	41.32	3	Horizontal	58	2.84	-	38.70	10.73	32.50				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

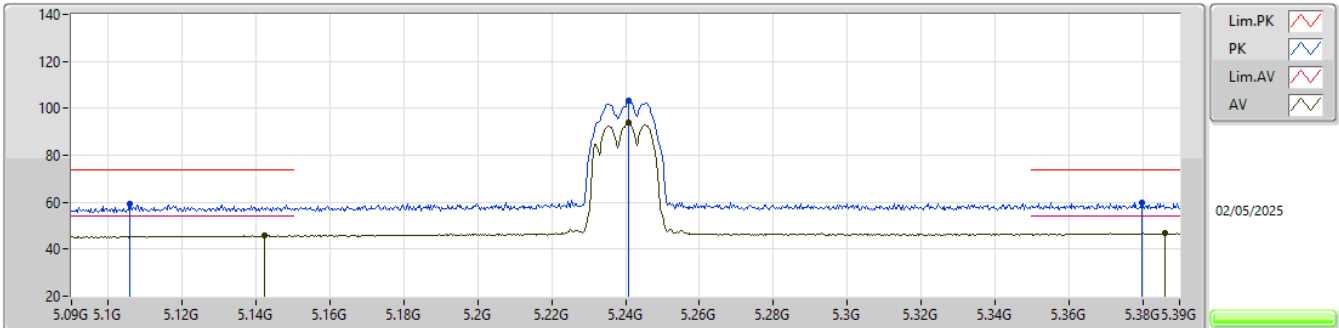


EUT_Y_2TX
Setting 13
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1059G	59.47	74.00	-14.53	52.66	3	Vertical	14	1.80	-	32.71	6.65	32.55			
AV	5.1422G	45.75	54.00	-8.25	38.88	3	Vertical	14	1.80	-	32.78	6.64	32.55			
PK	5.2409G	103.03	Inf	-Inf	96.00	3	Vertical	14	1.80	-	32.90	6.65	32.52			
AV	5.2409G	94.02	Inf	-Inf	86.99	3	Vertical	14	1.80	-	32.90	6.65	32.52			
PK	5.3798G	59.95	74.00	-14.05	52.50	3	Vertical	14	1.80	-	33.22	6.72	32.49			
AV	5.3861G	46.68	54.00	-7.32	39.21	3	Vertical	14	1.80	-	33.24	6.72	32.49			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

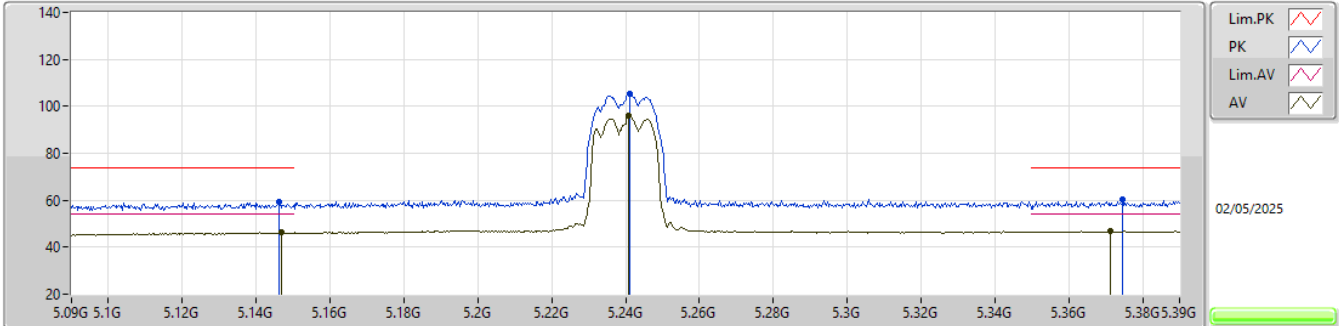


EUT_Y_2TX
Setting 13
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1461G	59.12	74.00	-14.88	52.23	3	Horizontal	11	1.80	-	32.79	6.64	32.54			
AV	5.147G	46.18	54.00	-7.82	39.29	3	Horizontal	11	1.80	-	32.79	6.64	32.54			
PK	5.2412G	105.56	Inf	-Inf	98.53	3	Horizontal	11	1.80	-	32.90	6.65	32.52			
AV	5.2409G	96.05	Inf	-Inf	89.02	3	Horizontal	11	1.80	-	32.90	6.65	32.52			
PK	5.3747G	60.27	74.00	-13.73	52.84	3	Horizontal	11	1.80	-	33.20	6.72	32.49			
AV	5.3714G	46.72	54.00	-7.28	39.30	3	Horizontal	11	1.80	-	33.19	6.72	32.49			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

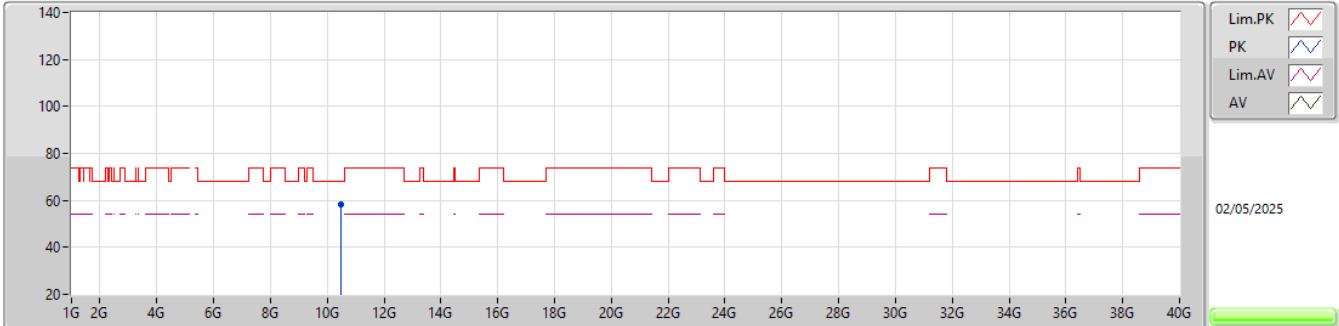


EUT_Y_2TX
Setting 13
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.47973G	58.14	68.20	-10.06	40.84	3	Vertical	72	1.09	-	38.92	10.81	32.43				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

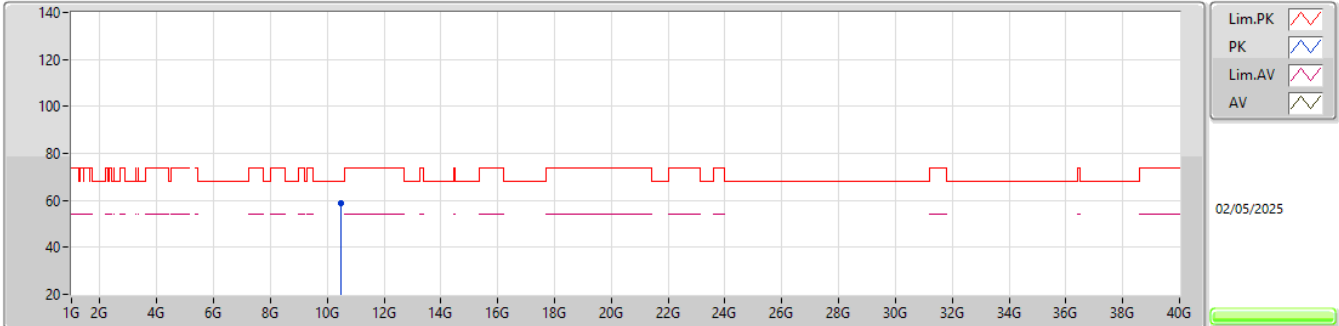


EUT_Y_2TX
Setting 13
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48053G	58.57	68.20	-9.63	41.27	3	Horizontal	275	2.98	-	38.92	10.81	32.43			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

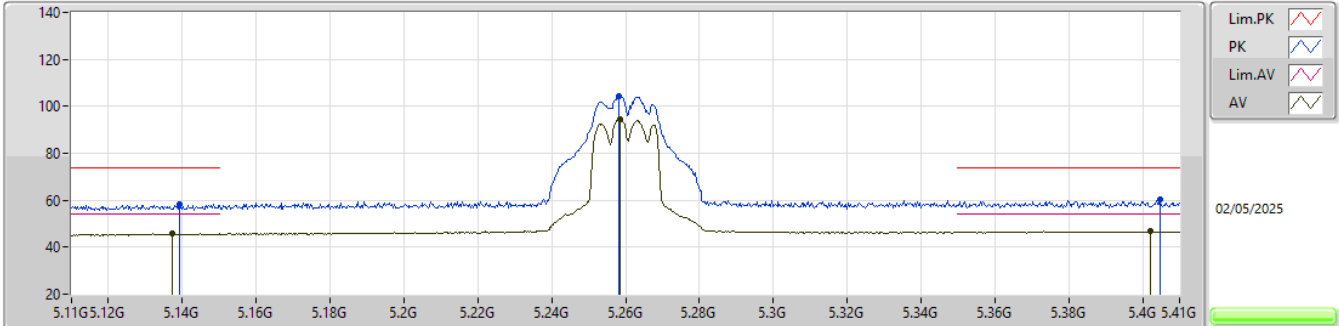


EUT_Y_2TX
Setting 14.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1391G	58.11	74.00	-15.89	51.24	3	Vertical	355	1.80	-	32.78	6.64	32.55			
AV	5.1373G	45.70	54.00	-8.30	38.84	3	Vertical	355	1.80	-	32.77	6.64	32.55			
PK	5.2582G	104.52	Inf	-Inf	97.46	3	Vertical	355	1.80	-	32.92	6.66	32.52			
AV	5.2585G	94.74	Inf	-Inf	87.68	3	Vertical	355	1.80	-	32.92	6.66	32.52			
PK	5.4046G	60.24	74.00	-13.76	52.66	3	Vertical	355	1.80	-	33.32	6.74	32.48			
AV	5.4022G	46.72	54.00	-7.28	39.16	3	Vertical	355	1.80	-	33.31	6.73	32.48			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

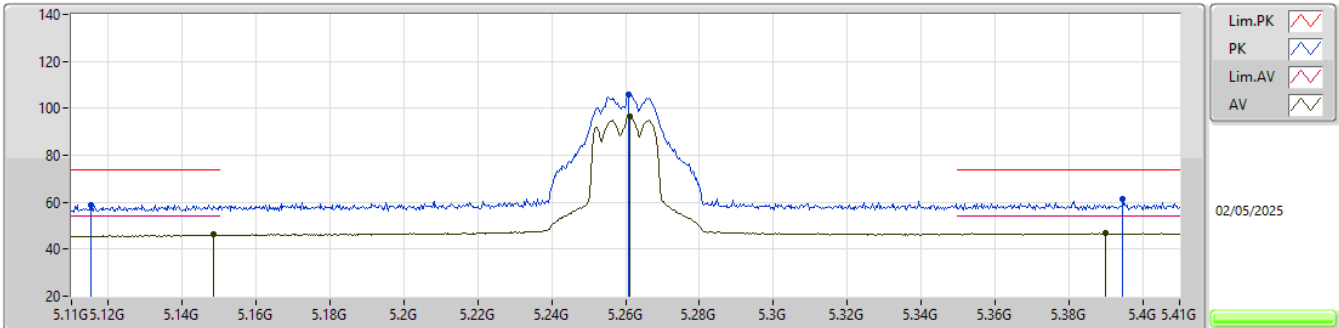


EUT Y_2TX
Setting 14.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1151G	59.01	74.00	-14.99	52.18	3	Horizontal	8	1.80	-	32.73	6.65	32.55			
AV	5.1484G	46.33	54.00	-7.67	39.43	3	Horizontal	8	1.80	-	32.80	6.64	32.54			
PK	5.2609G	106.05	Inf	-Inf	98.99	3	Horizontal	8	1.80	-	32.92	6.66	32.52			
AV	5.2612G	96.36	Inf	-Inf	89.30	3	Horizontal	8	1.80	-	32.92	6.66	32.52			
PK	5.3947G	61.19	74.00	-12.81	53.67	3	Horizontal	8	1.80	-	33.28	6.73	32.49			
AV	5.3899G	46.75	54.00	-7.25	39.26	3	Horizontal	8	1.80	-	33.26	6.72	32.49			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

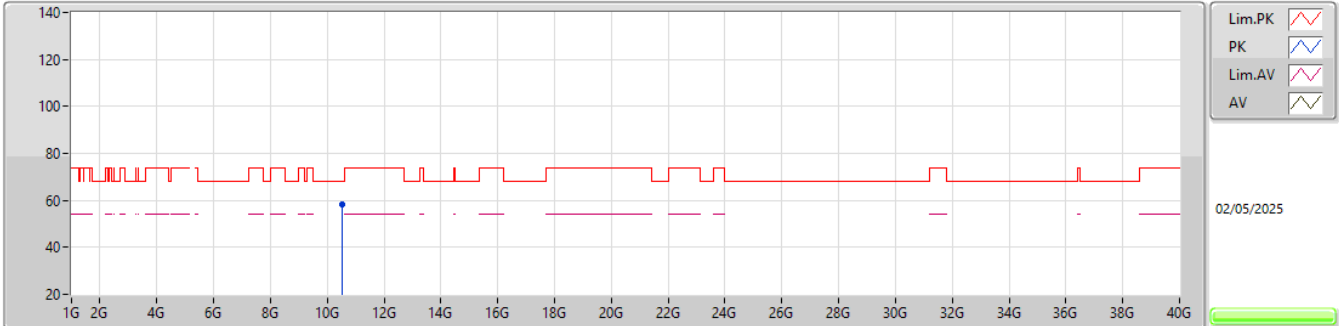


EUT_Y_2TX
Setting 14.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.51927G	58.08	68.20	-10.12	40.60	3	Vertical	105	2.55	-	39.04	10.85	32.41				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

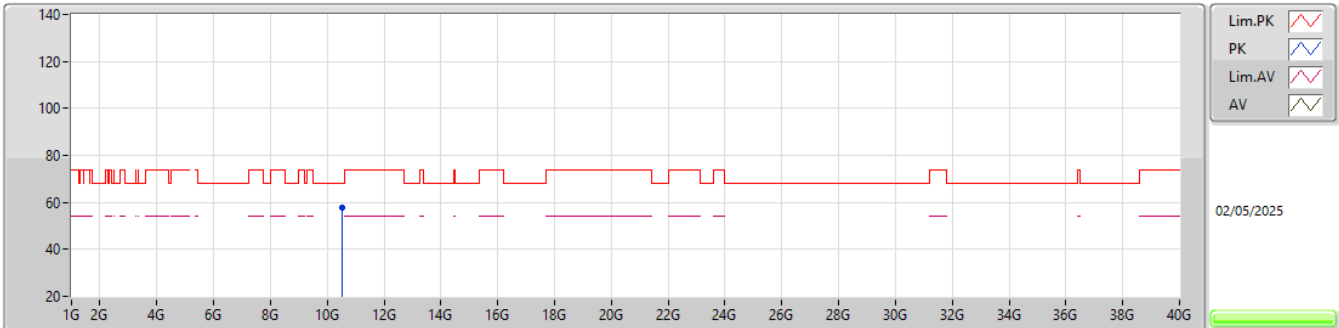


EUT_Y_2TX
Setting 14.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.51997G	57.91	68.20	-10.29	40.43	3	Horizontal	19	2.63	-	39.04	10.85	32.41				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

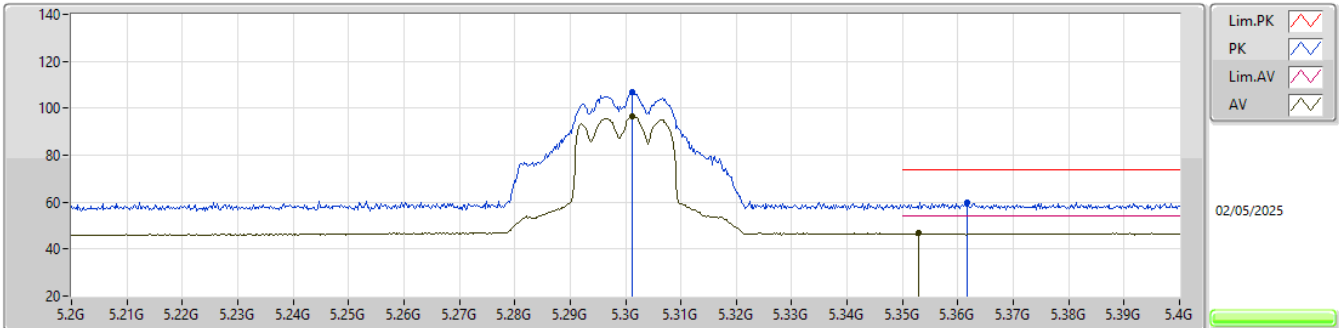


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3012G	106.73	Inf	-Inf	99.56	3	Vertical	354	1.80	-	33.00	6.68	32.51				
AV	5.3012G	96.51	Inf	-Inf	89.34	3	Vertical	354	1.80	-	33.00	6.68	32.51				
PK	5.3616G	59.89	74.00	-14.11	52.52	3	Vertical	354	1.80	-	33.15	6.71	32.49				
AV	5.353G	46.78	54.00	-7.22	39.46	3	Vertical	354	1.80	-	33.11	6.71	32.50				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

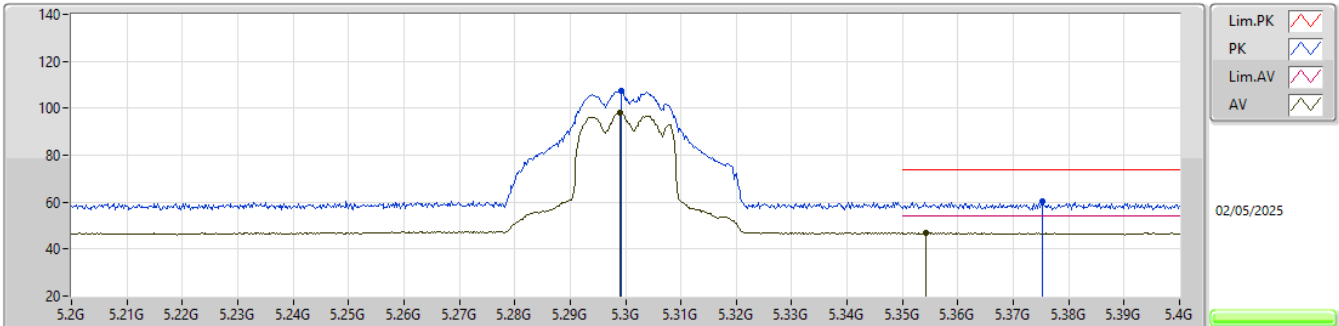


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2992G	107.37	Inf	-Inf	100.20	3	Horizontal	9	1.80	-	33.00	6.68	32.51			
AV	5.299G	97.91	Inf	-Inf	90.74	3	Horizontal	9	1.80	-	33.00	6.68	32.51			
PK	5.3752G	60.21	74.00	-13.79	52.78	3	Horizontal	9	1.80	-	33.20	6.72	32.49			
AV	5.3542G	46.99	54.00	-7.01	39.65	3	Horizontal	9	1.80	-	33.12	6.71	32.49			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

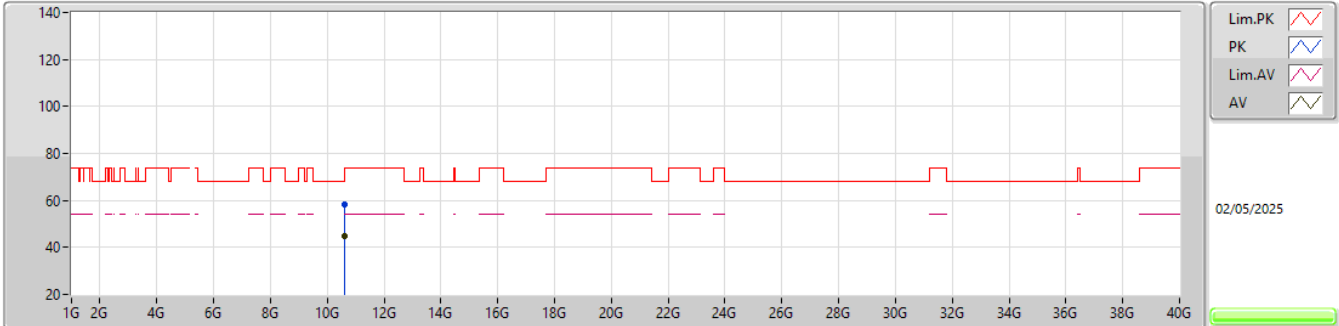


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.59919G	58.30	68.20	-9.90	40.68	3	Vertical	51	2.23	-	39.10	10.93	32.41			
AV	10.60018G	44.70	54.00	-9.30	27.08	3	Vertical	51	2.23	-	39.10	10.93	32.41			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

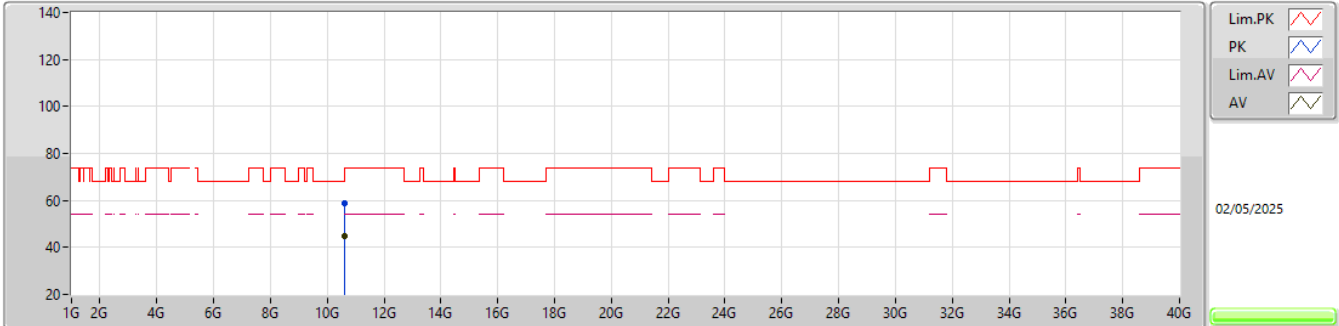


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.59902G	58.58	68.20	-9.62	40.96	3	Horizontal	135	2.78	-	39.10	10.93	32.41			
AV	10.60096G	44.66	54.00	-9.34	27.04	3	Horizontal	135	2.78	-	39.10	10.93	32.41			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

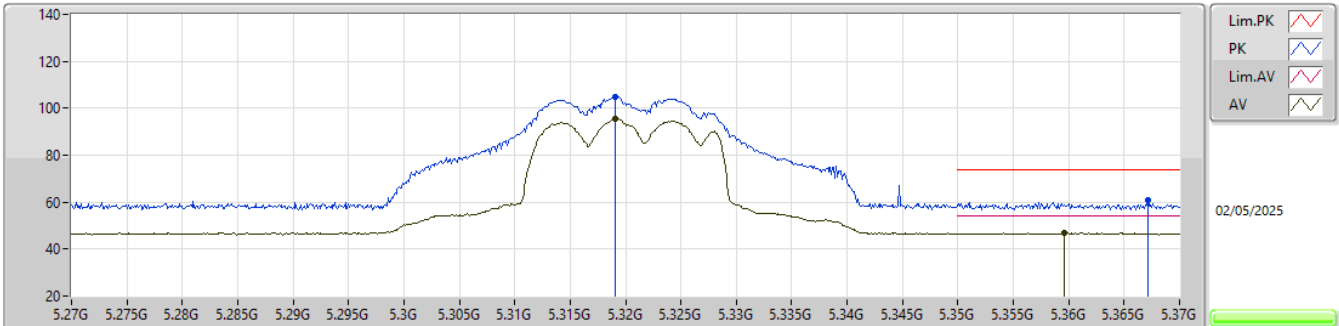


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3191G	104.81	Inf	-Inf	97.58	3	Vertical	355	1.80	-	33.04	6.69	32.50			
AV	5.3191G	95.30	Inf	-Inf	88.07	3	Vertical	355	1.80	-	33.04	6.69	32.50			
PK	5.3672G	60.95	74.00	-13.05	53.56	3	Vertical	355	1.80	-	33.17	6.71	32.49			
AV	5.3596G	46.81	54.00	-7.19	39.45	3	Vertical	355	1.80	-	33.14	6.71	32.49			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

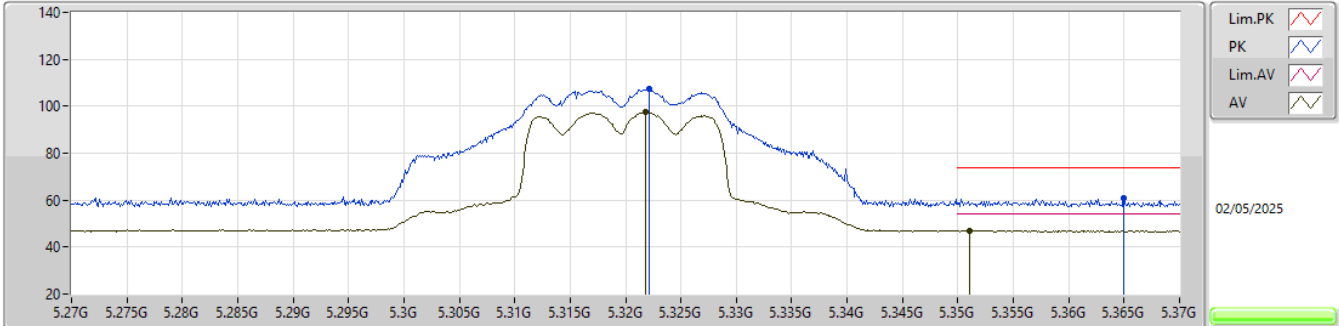


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3221G	107.28	Inf	-Inf	100.05	3	Horizontal	8	1.80	-	33.04	6.69	32.50			
AV	5.3218G	97.44	Inf	-Inf	90.21	3	Horizontal	8	1.80	-	33.04	6.69	32.50			
PK	5.365G	60.73	74.00	-13.27	53.35	3	Horizontal	8	1.80	-	33.16	6.71	32.49			
AV	5.3511G	47.08	54.00	-6.92	39.77	3	Horizontal	8	1.80	-	33.10	6.71	32.50			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

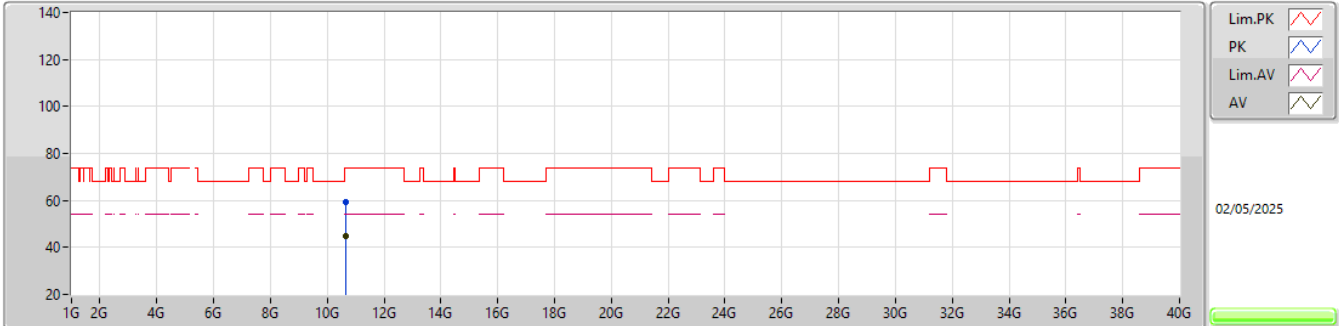


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.64006G	59.13	74.00	-14.87	41.40	3	Vertical	133	2.81	-	39.18	10.97	32.42			
AV	10.63922G	45.01	54.00	-8.99	27.28	3	Vertical	133	2.81	-	39.18	10.97	32.42			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

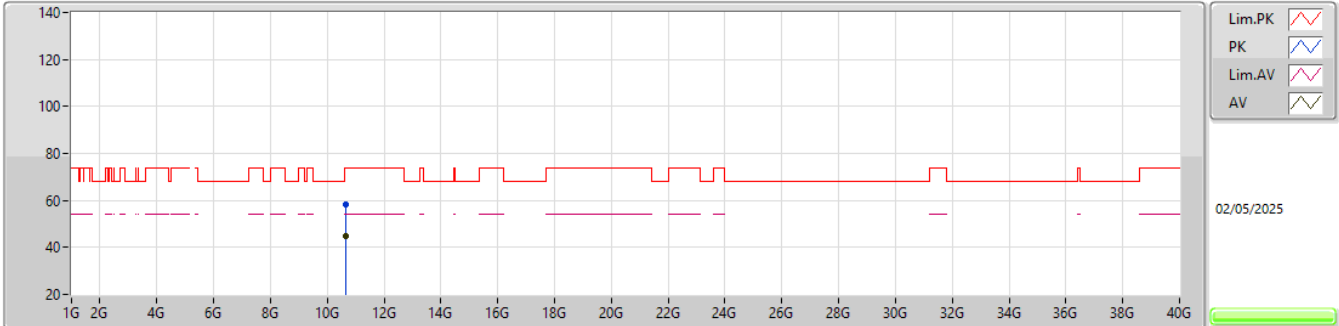


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.64047G	58.20	74.00	-15.80	40.47	3	Horizontal	73	1.84	-	39.18	10.97	32.42			
AV	10.63922G	44.94	54.00	-9.06	27.21	3	Horizontal	73	1.84	-	39.18	10.97	32.42			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

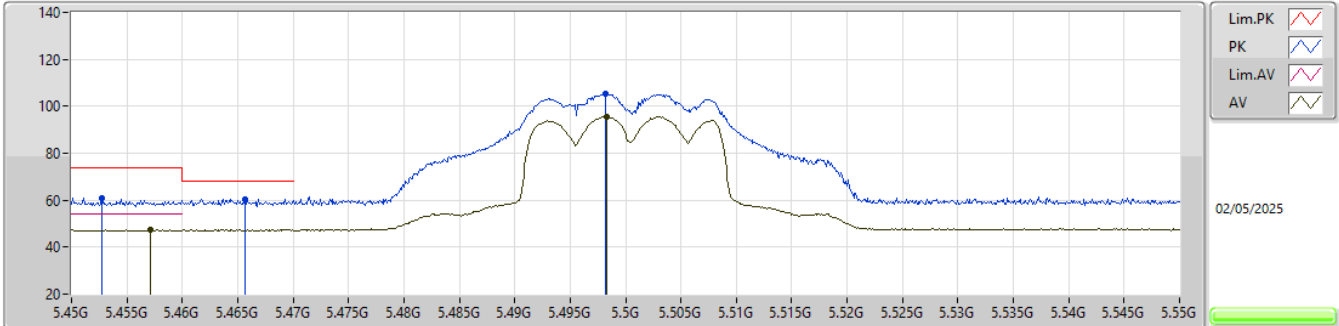


EUT_Y_2TX
Setting 14.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4527G	61.04	74.00	-12.96	53.16	3	Vertical	48	1.80	-	33.52	6.83	32.47			
AV	5.4571G	47.36	54.00	-6.64	39.45	3	Vertical	48	1.80	-	33.54	6.84	32.47			
PK	5.4657G	60.40	68.20	-7.80	52.43	3	Vertical	48	1.80	-	33.59	6.85	32.47			
PK	5.4982G	105.44	Inf	-Inf	97.20	3	Vertical	48	1.80	-	33.79	6.91	32.46			
AV	5.4983G	95.55	Inf	-Inf	87.31	3	Vertical	48	1.80	-	33.79	6.91	32.46			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

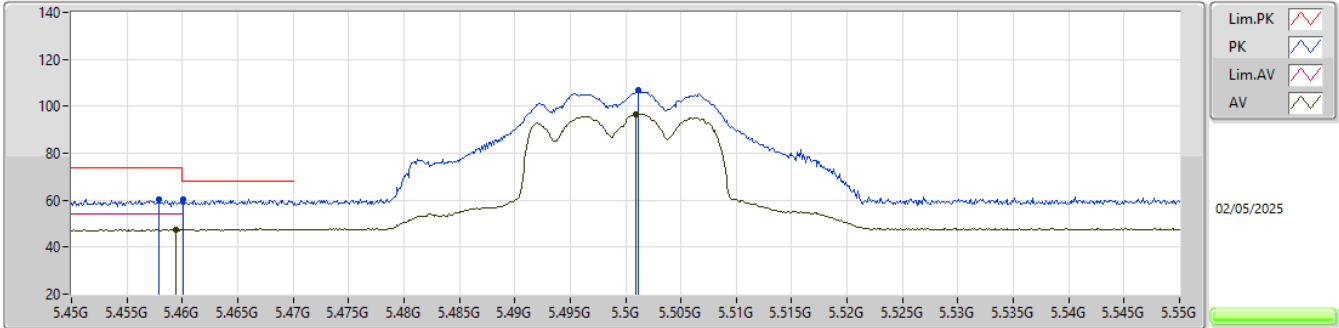


EUT_Y_2TX
Setting 14.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4579G	60.48	74.00	-13.52	52.56	3	Horizontal	22	1.80	-	33.55	6.84	32.47			
PK	5.4601G	60.40	68.20	-7.80	52.47	3	Horizontal	22	1.80	-	33.56	6.84	32.47			
AV	5.4594G	47.52	54.00	-6.48	39.59	3	Horizontal	22	1.80	-	33.56	6.84	32.47			
PK	5.5012G	107.02	Inf	-Inf	98.76	3	Horizontal	22	1.80	-	33.80	6.92	32.46			
AV	5.5009G	96.78	Inf	-Inf	88.52	3	Horizontal	22	1.80	-	33.80	6.92	32.46			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

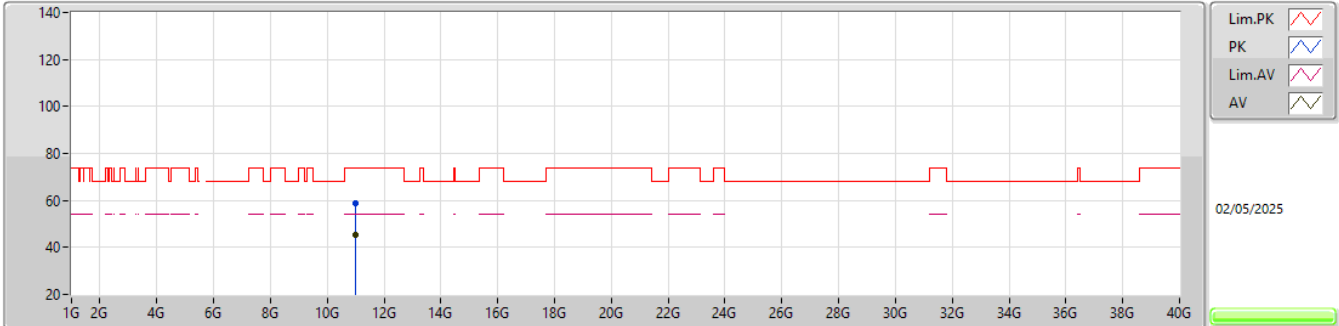


EUT_Y_2TX
Setting 14.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.99907G	58.87	74.00	-15.13	40.86	3	Vertical	208	1.20	-	39.10	11.34	32.43			
AV	10.99964G	45.23	54.00	-8.77	27.22	3	Vertical	208	1.20	-	39.10	11.34	32.43			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

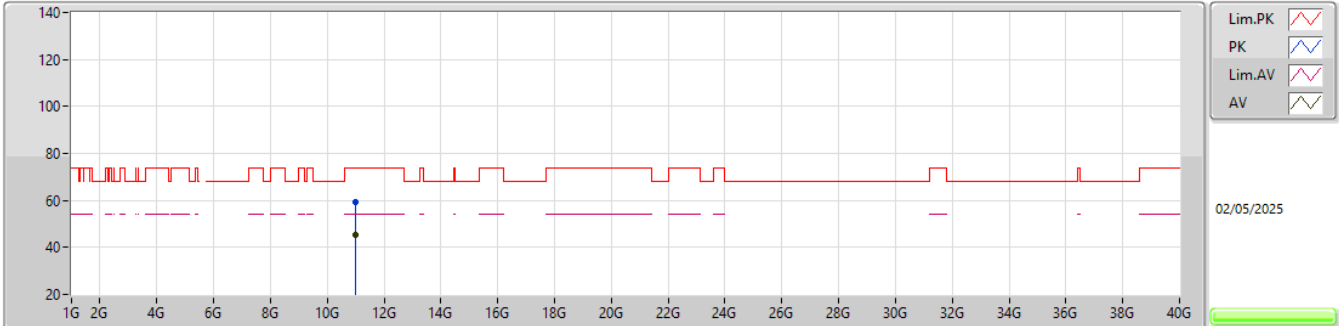


EUT_Y_2TX
Setting 14.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.9993G	59.15	74.00	-14.85	41.14	3	Horizontal	67	2.68	-	39.10	11.34	32.43			
AV	11.001G	45.19	54.00	-8.81	27.18	3	Horizontal	67	2.68	-	39.10	11.34	32.43			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

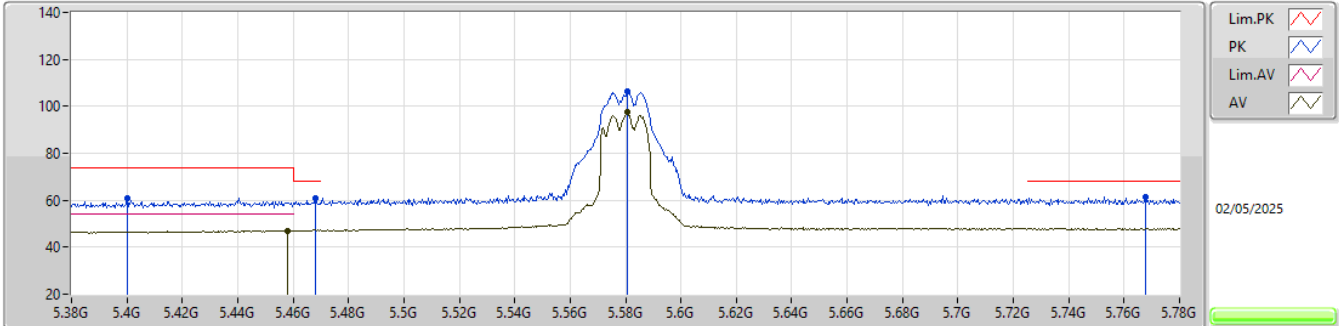


EUT_Y_2TX
Setting 15.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4G	60.65	74.00	-13.35	53.10	3	Vertical	50	1.00	-	33.30	6.73	32.48			
PK	5.468G	60.77	68.20	-7.43	52.77	3	Vertical	50	1.00	-	33.61	6.86	32.47			
AV	5.458G	47.14	54.00	-6.86	39.22	3	Vertical	50	1.00	-	33.55	6.84	32.47			
PK	5.5808G	106.53	Inf	-Inf	98.03	3	Vertical	50	1.00	-	33.90	7.06	32.46			
AV	5.5808G	97.35	Inf	-Inf	88.85	3	Vertical	50	1.00	-	33.90	7.06	32.46			
PK	5.7676G	61.14	68.20	-7.06	52.14	3	Vertical	50	1.00	-	34.14	7.31	32.45			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

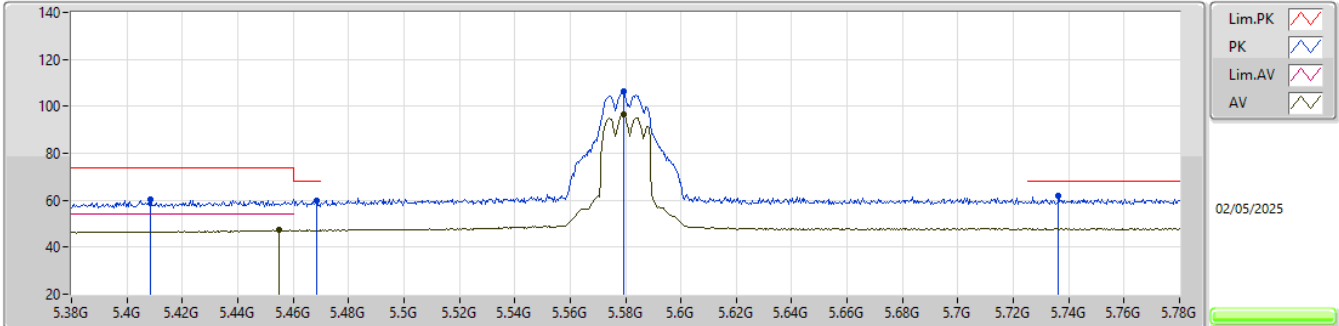


EUT_Y_2TX
Setting 15.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4084G	60.25	74.00	-13.75	52.65	3	Horizontal	21	1.80	-	33.33	6.75	32.48			
PK	5.4684G	59.93	68.20	-8.27	51.93	3	Horizontal	21	1.80	-	33.61	6.86	32.47			
AV	5.4548G	47.20	54.00	-6.80	39.31	3	Horizontal	21	1.80	-	33.53	6.83	32.47			
PK	5.5792G	106.22	Inf	-Inf	97.72	3	Horizontal	21	1.80	-	33.90	7.06	32.46			
AV	5.5792G	96.57	Inf	-Inf	88.07	3	Horizontal	21	1.80	-	33.90	7.06	32.46			
PK	5.7364G	61.65	68.20	-6.55	52.73	3	Horizontal	21	1.80	-	34.10	7.27	32.45			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

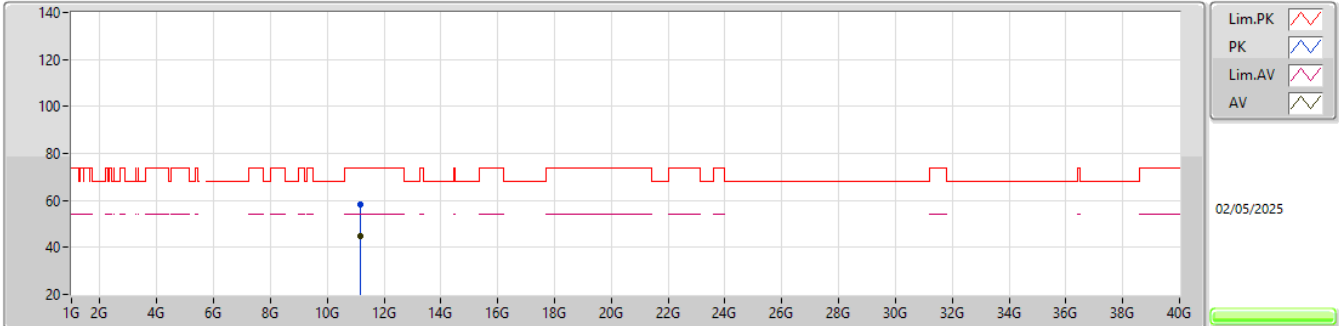


EUT_Y_2TX
Setting 15.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.16006G	58.47	74.00	-15.53	40.65	3	Vertical	302	1.30	-	38.80	11.50	32.48			
AV	11.16023G	44.82	54.00	-9.18	27.00	3	Vertical	302	1.30	-	38.80	11.50	32.48			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

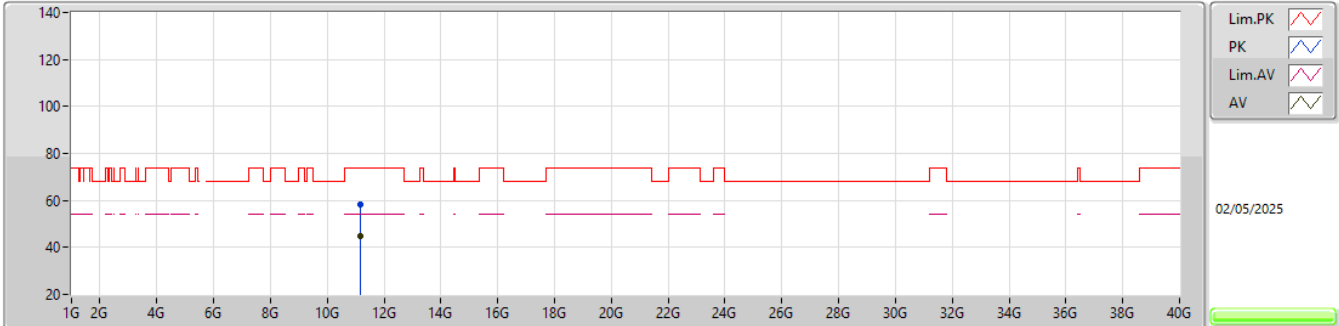


EUT_Y_2TX
Setting 15.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.16094G	58.45	74.00	-15.55	40.63	3	Horizontal	94	2.29	-	38.80	11.50	32.48			
AV	11.15917G	44.83	54.00	-9.17	27.01	3	Horizontal	94	2.29	-	38.80	11.50	32.48			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

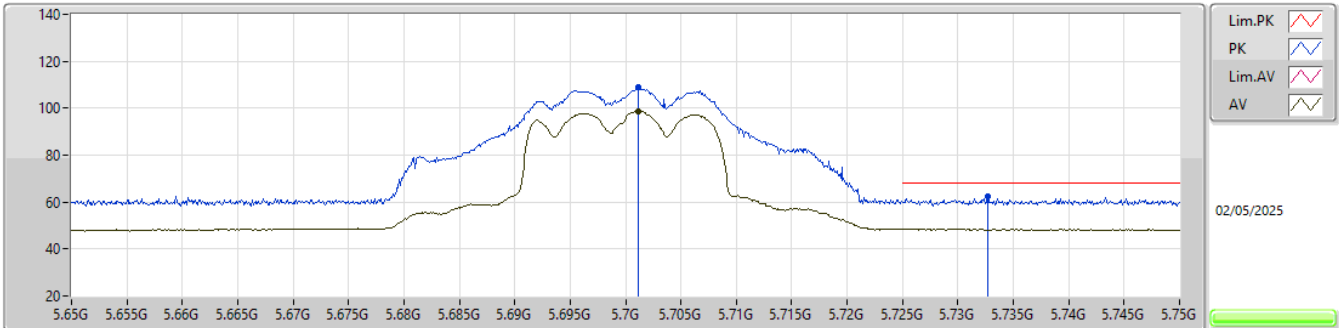


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7011G	108.92	Inf	-Inf	100.04	3	Vertical	51	1.00	-	34.10	7.23	32.45			
AV	5.7011G	98.80	Inf	-Inf	89.92	3	Vertical	51	1.00	-	34.10	7.23	32.45			
PK	5.7327G	62.67	68.20	-5.53	53.75	3	Vertical	51	1.00	-	34.10	7.27	32.45			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

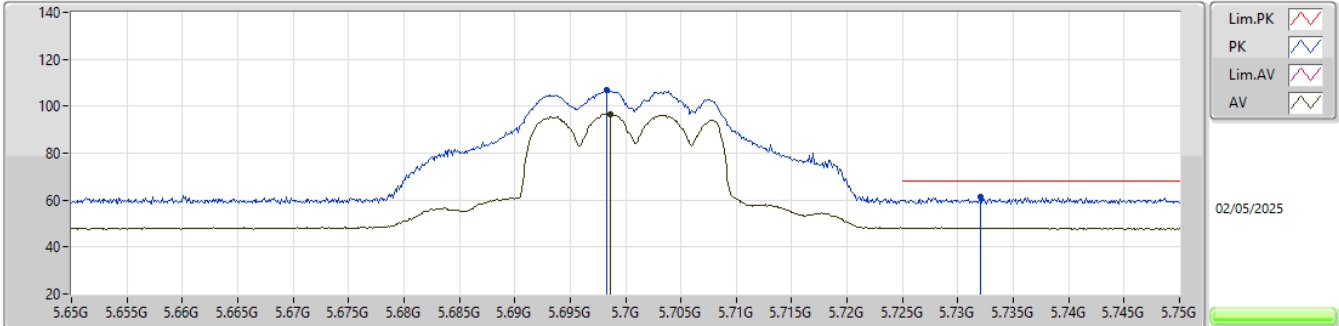


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6983G	106.79	Inf	-Inf	97.92	3	Horizontal	328	1.80	-	34.10	7.22	32.45			
AV	5.6986G	96.80	Inf	-Inf	87.93	3	Horizontal	328	1.80	-	34.10	7.22	32.45			
PK	5.732G	61.39	68.20	-6.81	52.48	3	Horizontal	328	1.80	-	34.10	7.26	32.45			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

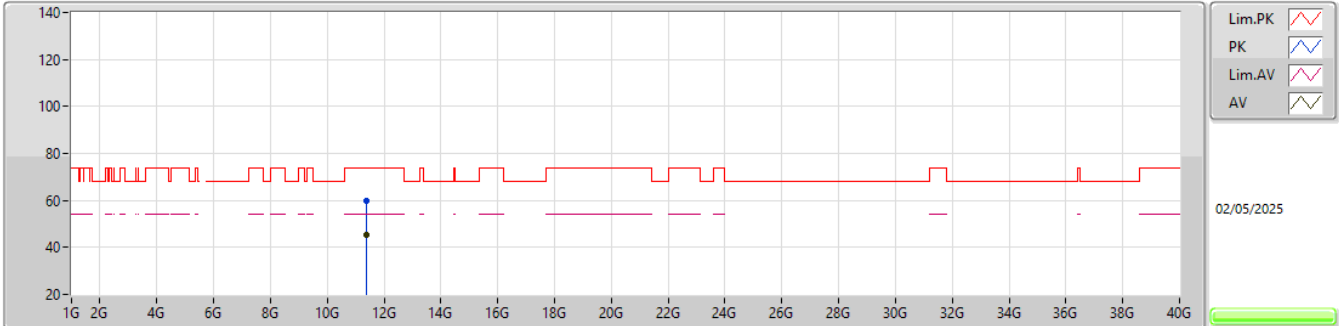


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39996G	60.06	74.00	-13.94	41.76	3	Vertical	274	1.89	-	39.10	11.75	32.55			
AV	11.40097G	45.49	54.00	-8.51	27.19	3	Vertical	274	1.89	-	39.10	11.75	32.55			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

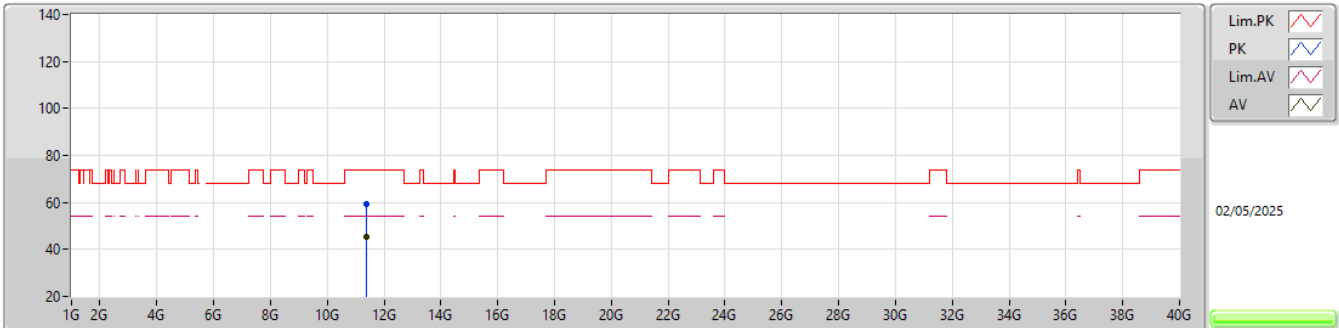


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.40072G	59.19	74.00	-14.81	40.89	3	Horizontal	302	1.46	-	39.10	11.75	32.55			
AV	11.4007G	45.56	54.00	-8.44	27.26	3	Horizontal	302	1.46	-	39.10	11.75	32.55			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

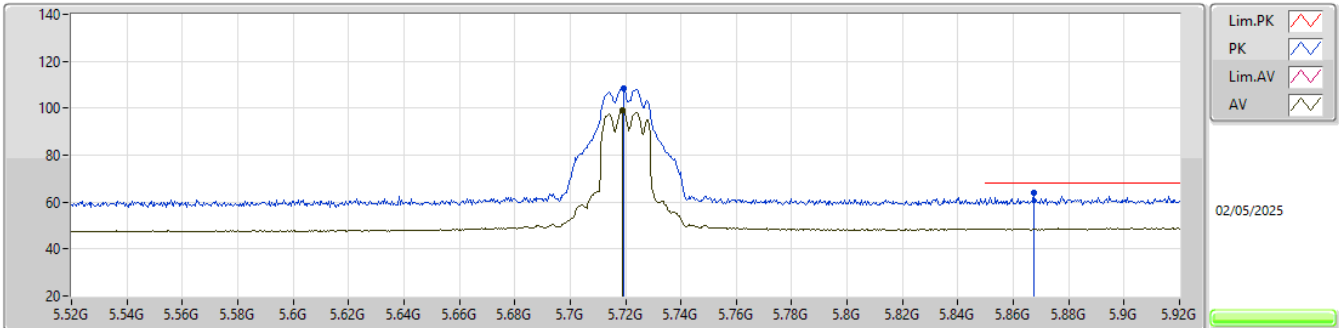


EUT Y_2TX
Setting 15.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7192G	108.44	Inf	-Inf	99.54	3	Vertical	50	1.00	-	34.10	7.25	32.45			
AV	5.7188G	99.19	Inf	-Inf	90.29	3	Vertical	50	1.00	-	34.10	7.25	32.45			
PK	5.8676G	63.74	68.20	-4.46	54.18	3	Vertical	50	1.00	-	34.61	7.40	32.45			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

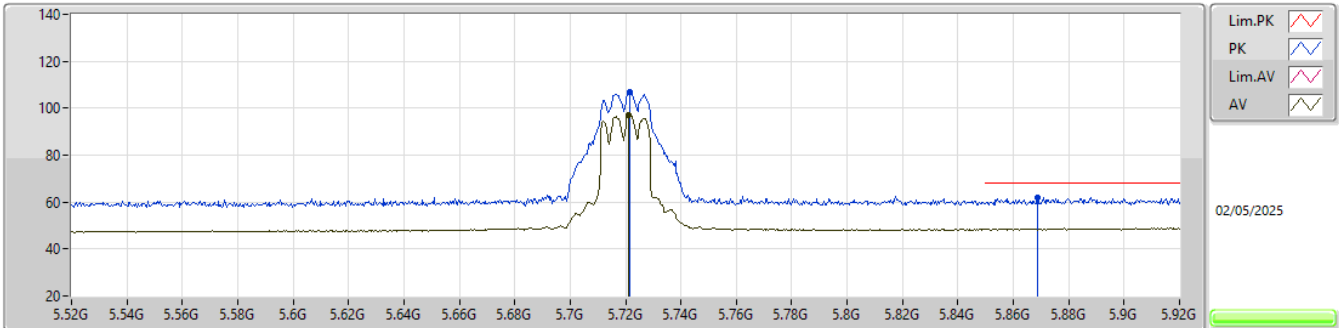


EUT_Y_2TX
Setting 15.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7216G	106.68	Inf	-Inf	97.78	3	Horizontal	323	1.80	-	34.10	7.25	32.45			
AV	5.7212G	97.08	Inf	-Inf	88.18	3	Horizontal	323	1.80	-	34.10	7.25	32.45			
PK	5.8688G	61.88	68.20	-6.32	52.32	3	Horizontal	323	1.80	-	34.61	7.40	32.45			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

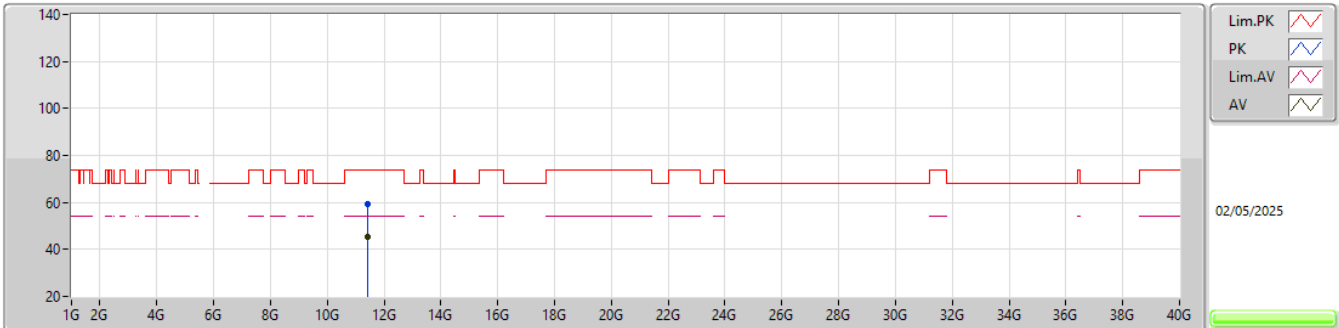


EUT_Y_2TX
Setting 15.5
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43982G	59.20	74.00	-14.80	40.95	3	Vertical	99	2.61	-	39.02	11.79	32.56			
AV	11.44G	45.54	54.00	-8.46	27.29	3	Vertical	99	2.61	-	39.02	11.79	32.56			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

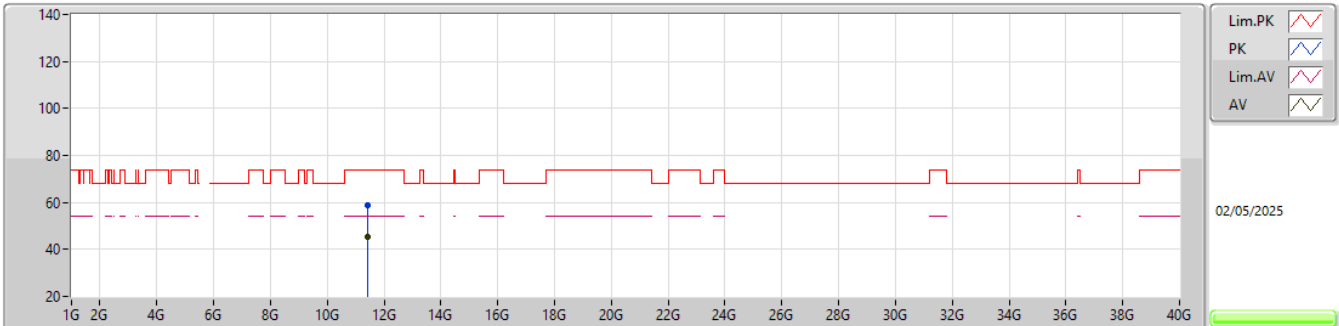


EUT_Y_2TX
Setting 15.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43958G	58.79	74.00	-15.21	40.54	3	Horizontal	40	2.97	-	39.02	11.79	32.56			
AV	11.44085G	45.52	54.00	-8.48	27.27	3	Horizontal	40	2.97	-	39.02	11.79	32.56			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5745MHz_TX

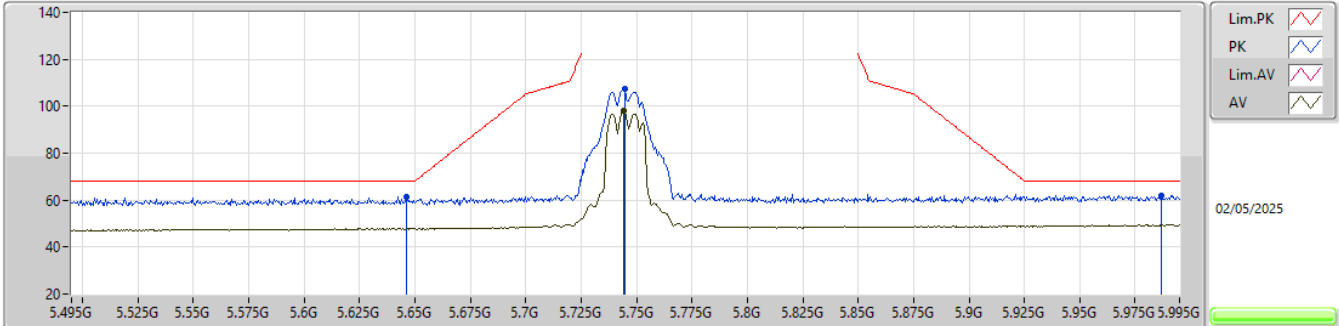


EUT_Y_2TX
Setting 15
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.646G	61.26	68.20	-6.94	52.56	3	Vertical	52	1.00	-	33.99	7.16	32.45			
PK	5.7445G	107.47	Inf	-Inf	98.54	3	Vertical	52	1.00	-	34.10	7.28	32.45			
AV	5.744G	97.95	Inf	-Inf	89.02	3	Vertical	52	1.00	-	34.10	7.28	32.45			
PK	5.987G	61.90	68.20	-6.30	51.60	3	Vertical	52	1.00	-	35.25	7.49	32.44			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5745MHz_TX

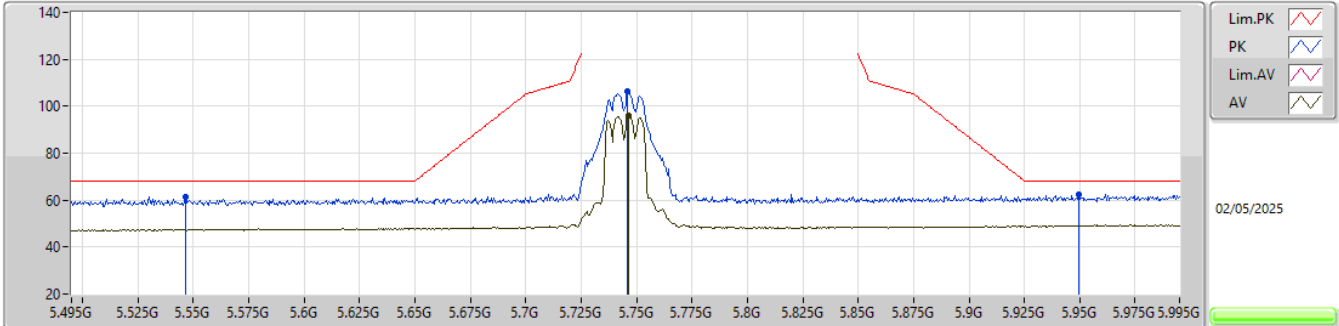


EUT_Y_2TX
Setting 15
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.5465G	61.32	68.20	-6.88	52.89	3	Horizontal	326	1.80	-	33.89	7.00	32.46
PK	5.746G	106.20	Inf	-Inf	97.27	3	Horizontal	326	1.80	-	34.10	7.28	32.45
AV	5.7465G	96.18	Inf	-Inf	87.25	3	Horizontal	326	1.80	-	34.10	7.28	32.45
PK	5.9495G	62.19	68.20	-6.01	52.07	3	Horizontal	326	1.80	-	35.10	7.46	32.44

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5745MHz_TX

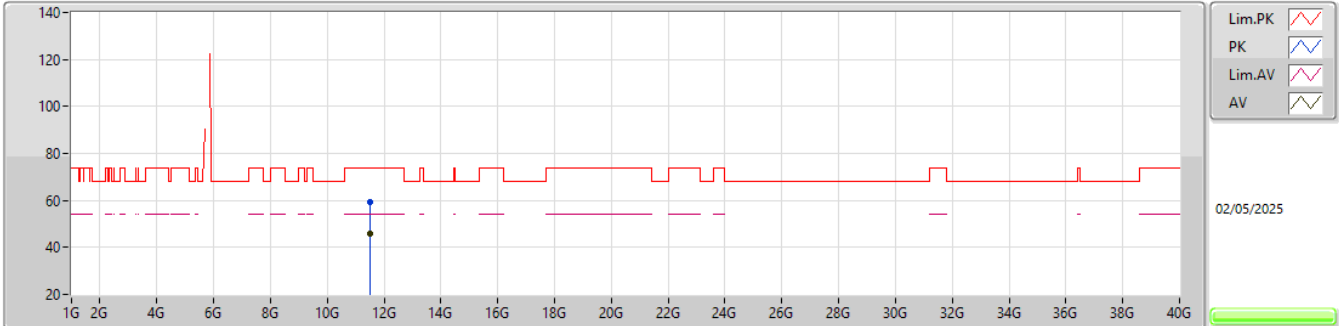


EUT Y_2TX
Setting 15
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.48982G	59.44	74.00	-14.56	41.26	3	Vertical	7	2.32	-	38.92	11.84	32.58			
AV	11.48932G	45.70	54.00	-8.30	27.52	3	Vertical	7	2.32	-	38.92	11.84	32.58			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5745MHz_TX

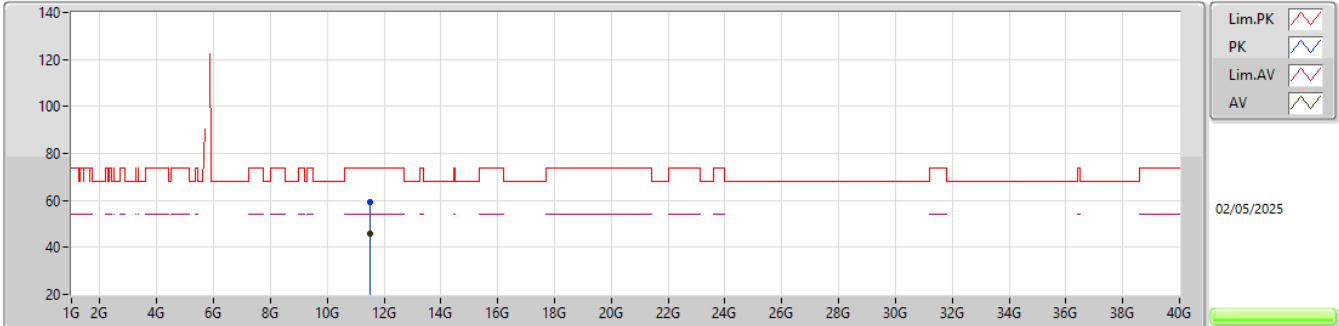


EUT Y_2TX
Setting 15
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.49044G	59.24	74.00	-14.76	41.06	3	Horizontal	112	2.06	-	38.92	11.84	32.58			
AV	11.49088G	45.69	54.00	-8.31	27.51	3	Horizontal	112	2.06	-	38.92	11.84	32.58			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5785MHz_TX

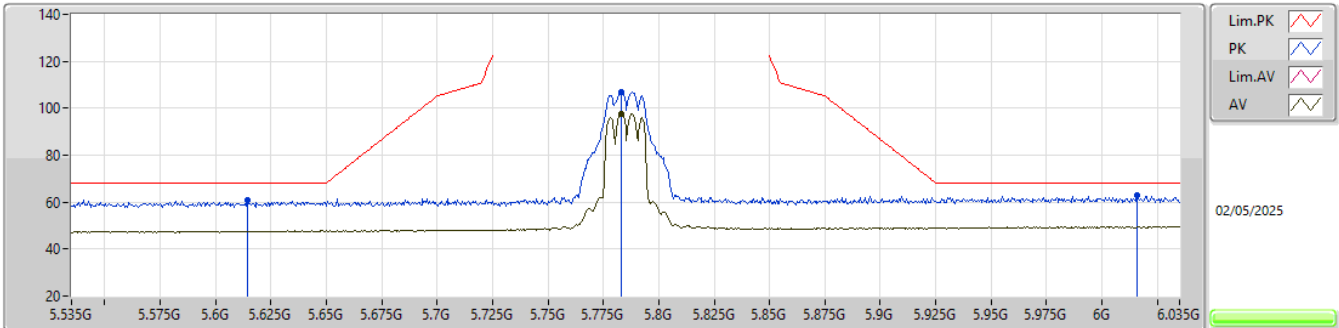


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6145G	60.95	68.20	-7.25	52.36	3	Vertical	23	1.80	-	33.93	7.12	32.46			
PK	5.783G	107.14	Inf	-Inf	98.09	3	Vertical	23	1.80	-	34.17	7.33	32.45			
AV	5.783G	97.82	Inf	-Inf	88.77	3	Vertical	23	1.80	-	34.17	7.33	32.45			
PK	6.016G	62.84	68.20	-5.36	52.44	3	Vertical	23	1.80	-	35.33	7.51	32.44			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5785MHz_TX

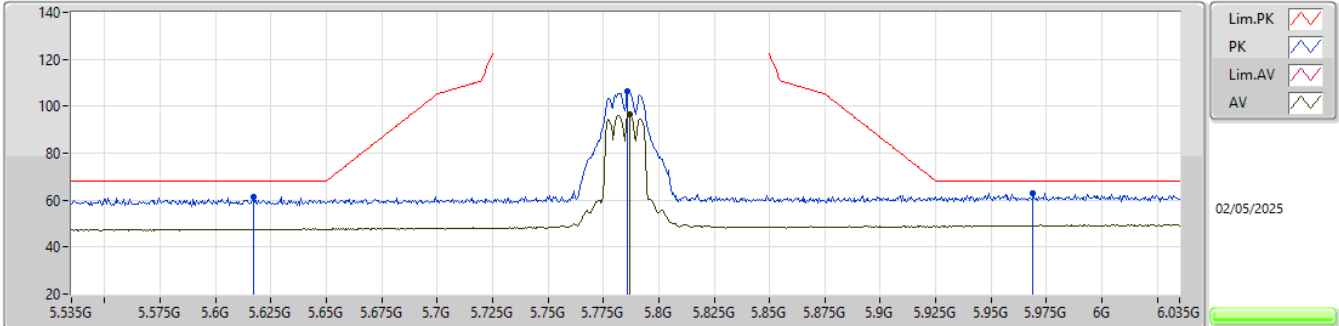


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.617G	61.59	68.20	-6.61	53.00	3	Horizontal	327	1.80	-	33.93	7.12	32.46			
PK	5.786G	106.20	Inf	-Inf	97.15	3	Horizontal	327	1.80	-	34.17	7.33	32.45			
AV	5.787G	96.40	Inf	-Inf	87.35	3	Horizontal	327	1.80	-	34.17	7.33	32.45			
PK	5.969G	62.84	68.20	-5.36	52.62	3	Horizontal	327	1.80	-	35.18	7.48	32.44			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5785MHz_TX

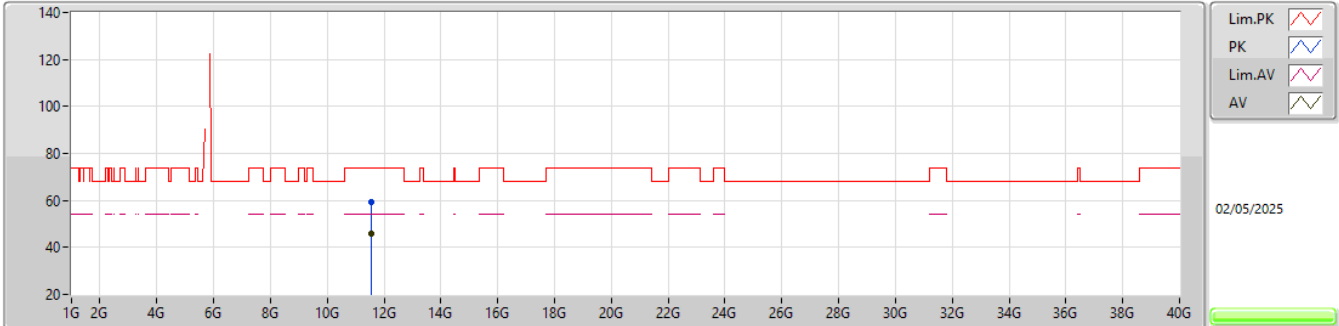


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.57085G	59.21	74.00	-14.79	40.94	3	Vertical	306	2.18	-	38.96	11.92	32.61			
AV	11.5694G	45.77	54.00	-8.23	27.50	3	Vertical	306	2.18	-	38.96	11.92	32.61			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5785MHz_TX

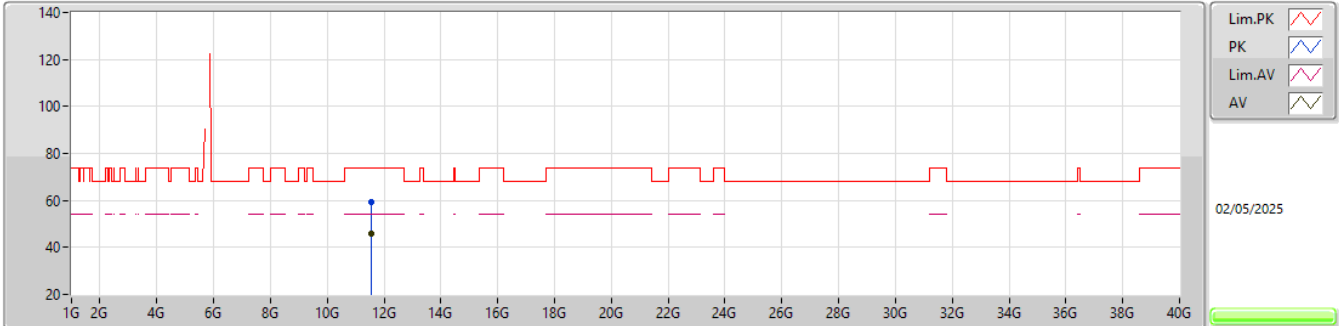


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.56938G	59.34	74.00	-14.66	41.07	3	Horizontal	139	1.96	-	38.96	11.92	32.61			
AV	11.57041G	45.90	54.00	-8.10	27.63	3	Horizontal	139	1.96	-	38.96	11.92	32.61			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

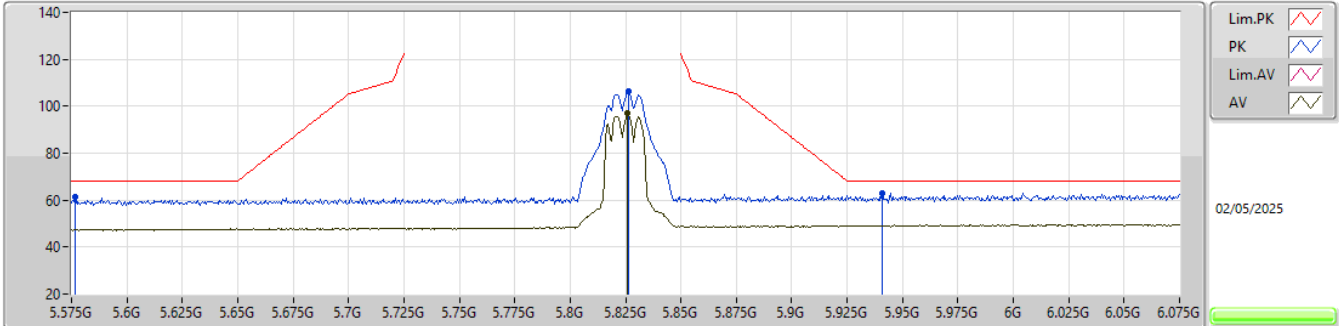


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.5765G	61.20	68.20	-7.00	52.70	3	Vertical	21	1.80	-	33.90	7.06	32.46				
PK	5.8265G	106.52	Inf	-Inf	97.24	3	Vertical	21	1.80	-	34.36	7.37	32.45				
AV	5.826G	96.98	Inf	-Inf	87.70	3	Vertical	21	1.80	-	34.36	7.37	32.45				
PK	5.941G	63.15	68.20	-5.05	53.08	3	Vertical	21	1.80	-	35.05	7.46	32.44				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

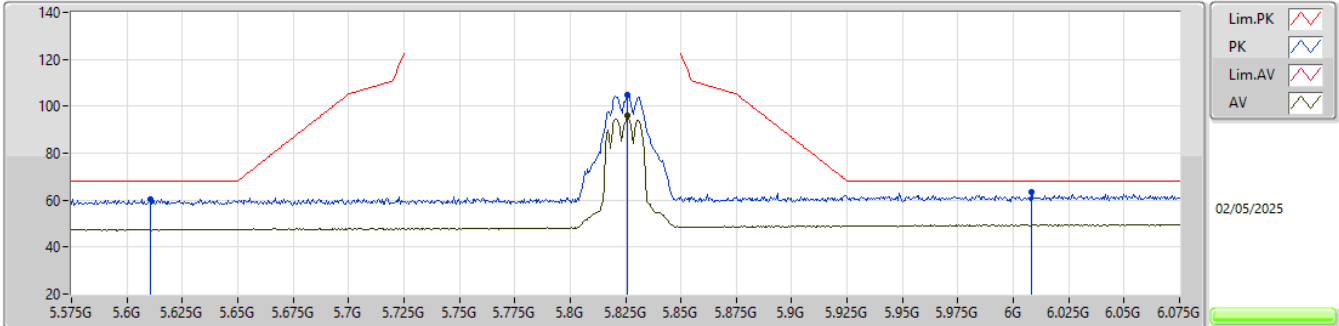


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6105G	60.56	68.20	-7.64	51.99	3	Horizontal	357	1.80	-	33.92	7.11	32.46			
PK	5.826G	105.00	Inf	-Inf	95.72	3	Horizontal	357	1.80	-	34.36	7.37	32.45			
AV	5.826G	95.85	Inf	-Inf	86.57	3	Horizontal	357	1.80	-	34.36	7.37	32.45			
PK	6.008G	63.27	68.20	-4.93	52.89	3	Horizontal	357	1.80	-	35.32	7.50	32.44			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

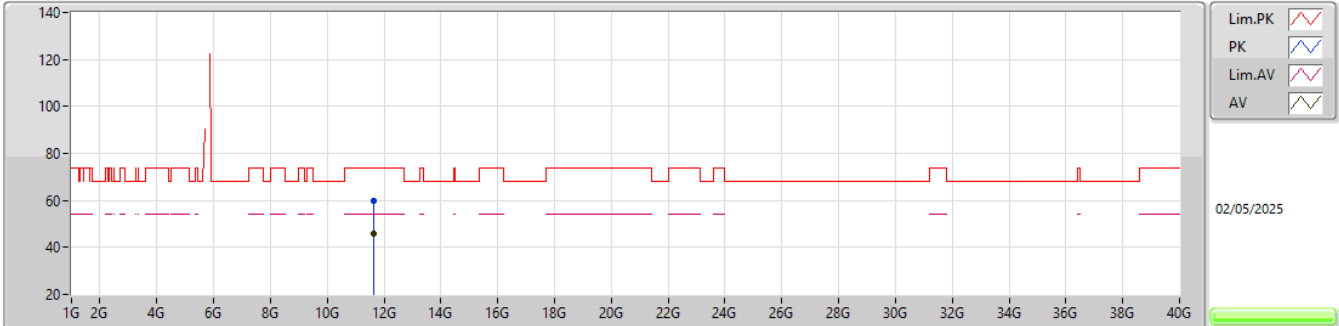


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.65025G	59.58	74.00	-14.42	41.33	3	Vertical	219	2.32	-	38.90	12.00	32.65			
AV	11.65041G	45.72	54.00	-8.28	27.47	3	Vertical	219	2.32	-	38.90	12.00	32.65			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

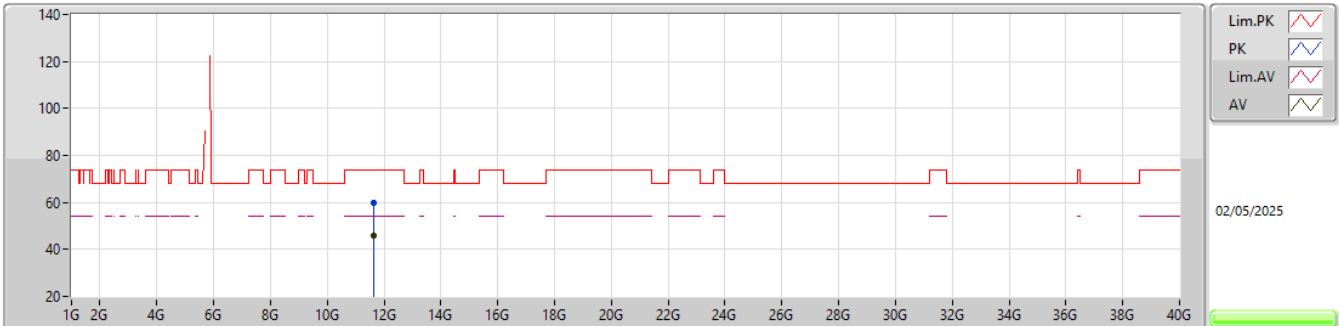


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64927G	59.57	74.00	-14.43	41.32	3	Horizontal	181	1.40	-	38.90	12.00	32.65			
AV	11.65089G	45.80	54.00	-8.20	27.55	3	Horizontal	181	1.40	-	38.90	12.00	32.65			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5180MHz_TX

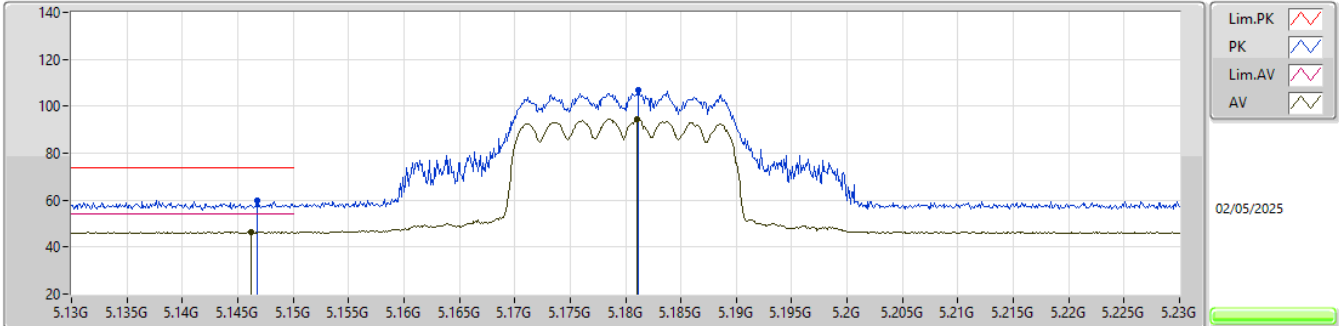


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1468G	59.84	74.00	-14.16	52.95	3	Vertical	21	2.20	-	32.79	6.64	32.54			
AV	5.1462G	46.56	54.00	-7.44	39.67	3	Vertical	21	2.20	-	32.79	6.64	32.54			
PK	5.1811G	107.00	Inf	-Inf	100.05	3	Vertical	21	2.20	-	32.86	6.63	32.54			
AV	5.181G	94.52	Inf	-Inf	87.57	3	Vertical	21	2.20	-	32.86	6.63	32.54			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5180MHz_TX

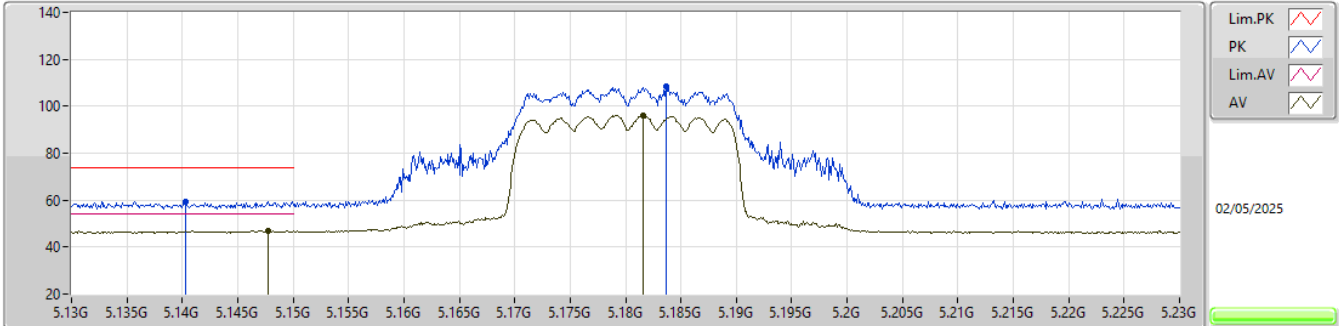


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1403G	59.49	74.00	-14.51	52.62	3	Horizontal	12	1.80	-	32.78	6.64	32.55				
AV	5.1477G	46.99	54.00	-7.01	40.09	3	Horizontal	12	1.80	-	32.80	6.64	32.54				
PK	5.1837G	108.49	Inf	-Inf	101.53	3	Horizontal	12	1.80	-	32.87	6.63	32.54				
AV	5.1816G	96.18	Inf	-Inf	89.23	3	Horizontal	12	1.80	-	32.86	6.63	32.54				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5180MHz_TX

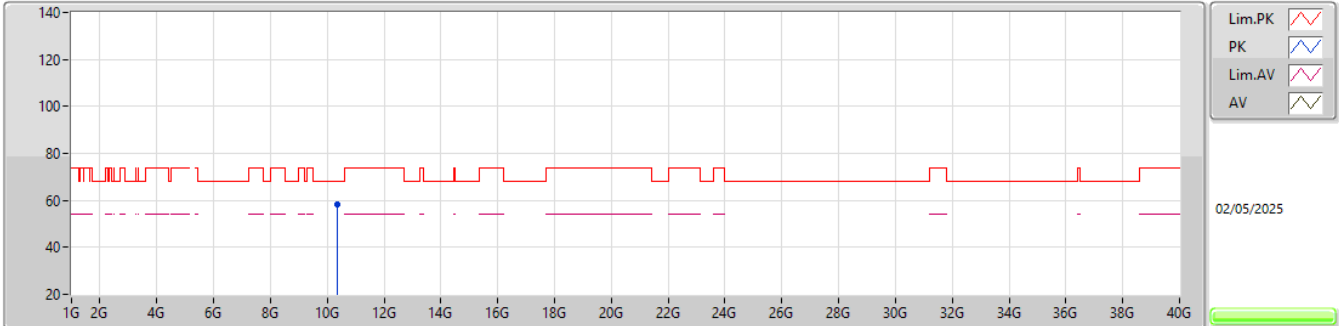


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35985G	58.24	68.20	-9.96	41.31	3	Vertical	278	1.41	-	38.78	10.69	32.54			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5180MHz_TX

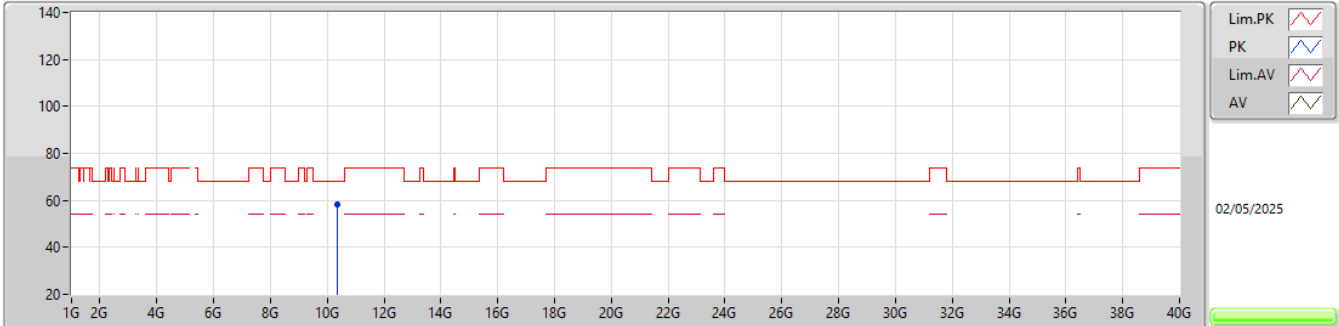


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35995G	58.42	68.20	-9.78	41.49	3	Horizontal	205	1.29	-	38.78	10.69	32.54			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5200MHz_TX

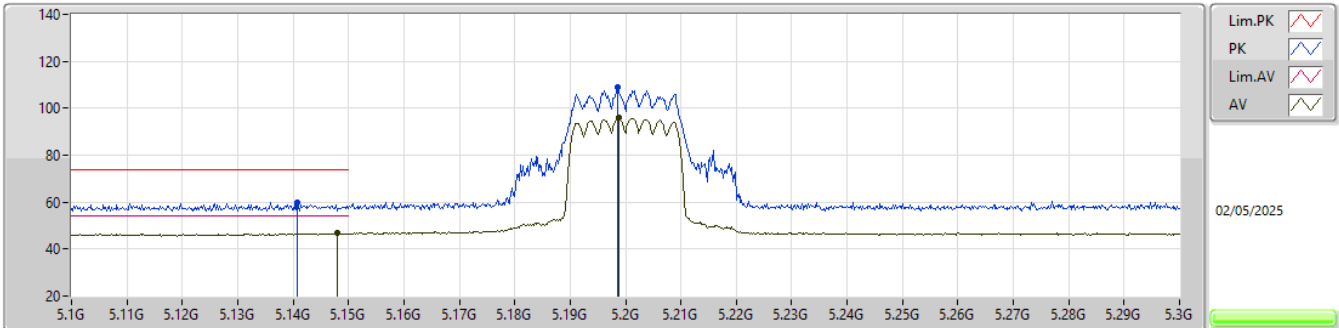


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1408G	59.96	74.00	-14.04	53.09	3	Vertical	343	2.38	-	32.78	6.64	32.55				
AV	5.148G	46.79	54.00	-7.21	39.89	3	Vertical	343	2.38	-	32.80	6.64	32.54				
PK	5.1986G	108.92	Inf	-Inf	101.92	3	Vertical	343	2.38	-	32.90	6.63	32.53				
AV	5.1988G	95.90	Inf	-Inf	88.90	3	Vertical	343	2.38	-	32.90	6.63	32.53				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5200MHz_TX

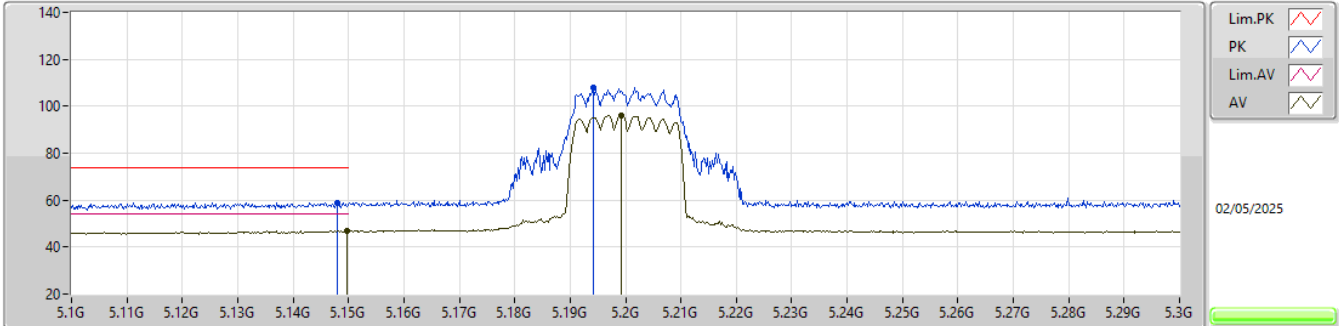


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.148G	58.87	74.00	-15.13	51.97	3	Horizontal	9	1.80	-	32.80	6.64	32.54				
AV	5.1498G	46.97	54.00	-7.03	40.07	3	Horizontal	9	1.80	-	32.80	6.64	32.54				
PK	5.1942G	107.83	Inf	-Inf	100.84	3	Horizontal	9	1.80	-	32.89	6.63	32.53				
AV	5.1992G	96.27	Inf	-Inf	89.27	3	Horizontal	9	1.80	-	32.90	6.63	32.53				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5200MHz_TX

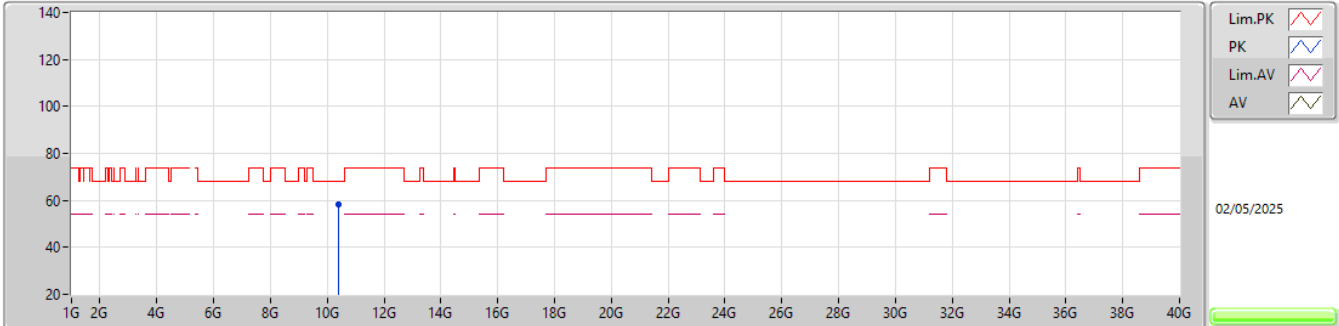


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.39959G	58.24	68.20	-9.96	41.31	3	Vertical	213	1.09	-	38.70	10.73	32.50				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TX

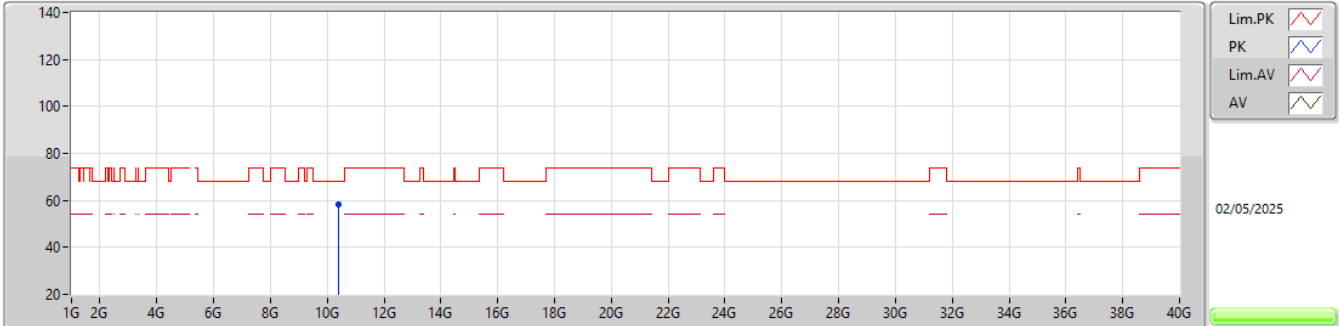


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40092G	58.02	68.20	-10.18	41.09	3	Horizontal	281	2.76	-	38.70	10.73	32.50			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TX

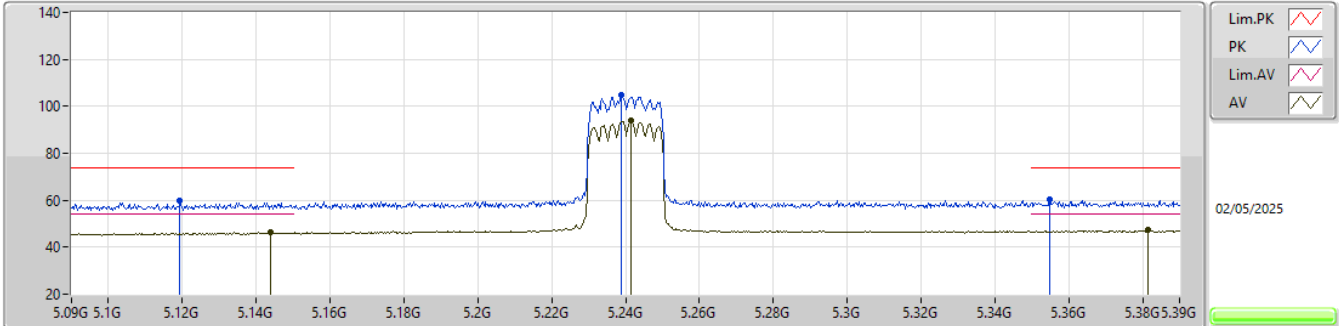


EUT Y_2TX
Setting 13
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1194G	59.89	74.00	-14.11	53.05	3	Vertical	14	1.80	-	32.74	6.65	32.55			
AV	5.144G	46.27	54.00	-7.73	39.39	3	Vertical	14	1.80	-	32.79	6.64	32.55			
PK	5.2388G	104.78	Inf	-Inf	97.75	3	Vertical	14	1.80	-	32.90	6.65	32.52			
AV	5.2415G	93.73	Inf	-Inf	86.70	3	Vertical	14	1.80	-	32.90	6.65	32.52			
PK	5.3549G	60.14	74.00	-13.86	52.80	3	Vertical	14	1.80	-	33.12	6.71	32.49			
AV	5.3816G	47.24	54.00	-6.76	39.78	3	Vertical	14	1.80	-	33.23	6.72	32.49			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TX

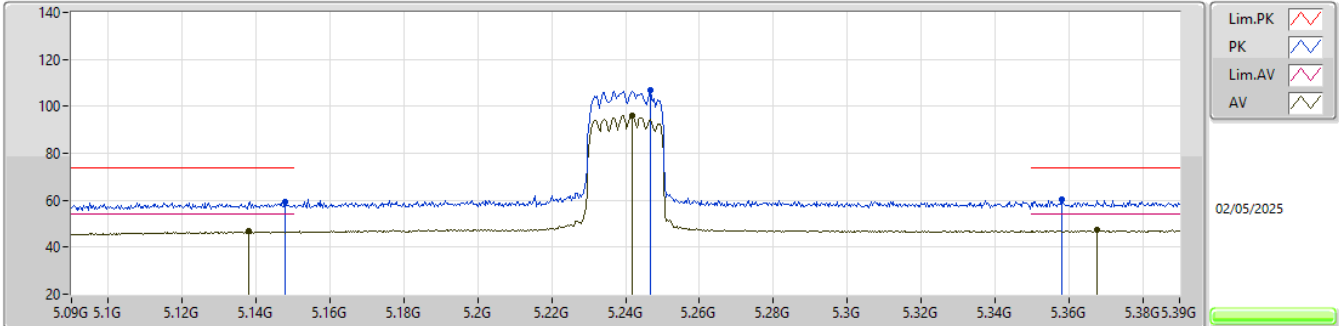


EUT Y_2TX
Setting 13
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1479G	59.49	74.00	-14.51	52.59	3	Horizontal	10	1.80	-	32.80	6.64	32.54			
AV	5.138G	46.85	54.00	-7.15	39.98	3	Horizontal	10	1.80	-	32.78	6.64	32.55			
PK	5.2466G	107.10	Inf	-Inf	100.07	3	Horizontal	10	1.80	-	32.90	6.65	32.52			
AV	5.2418G	95.86	Inf	-Inf	88.83	3	Horizontal	10	1.80	-	32.90	6.65	32.52			
PK	5.3582G	60.48	74.00	-13.52	53.13	3	Horizontal	10	1.80	-	33.13	6.71	32.49			
AV	5.3678G	47.22	54.00	-6.78	39.83	3	Horizontal	10	1.80	-	33.17	6.71	32.49			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TX

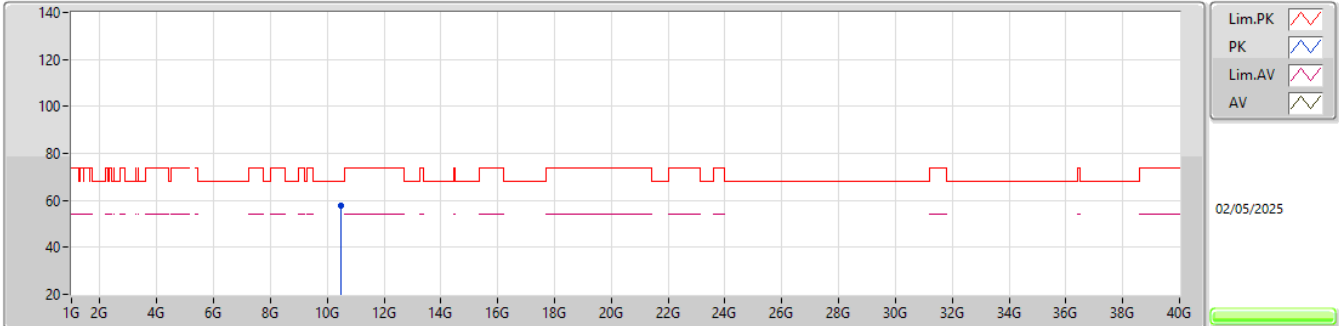


EUT_Y_2TX
Setting 13
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.4808G	57.95	68.20	-10.25	40.65	3	Vertical	349	1.35	-	38.92	10.81	32.43				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TX

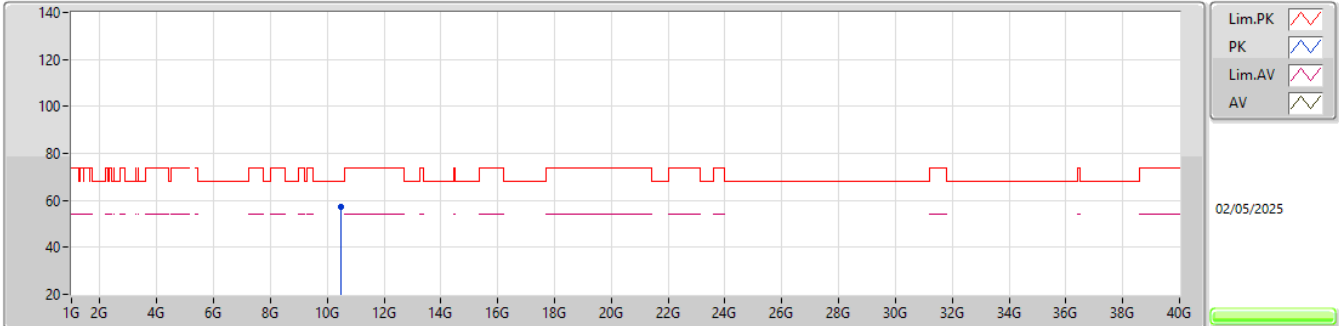


EUT_Y_2TX
Setting 13
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47963G	57.47	68.20	-10.73	40.17	3	Horizontal	244	2.46	-	38.92	10.81	32.43			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5260MHz_TX

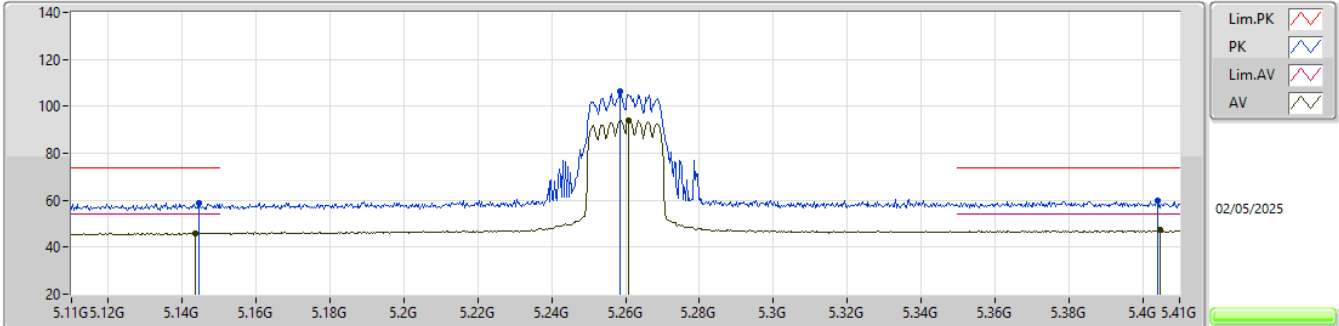


EUT_Y_2TX
Setting 14.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1445G	58.95	74.00	-15.05	52.07	3	Vertical	20	1.80	-	32.79	6.64	32.55			
AV	5.1436G	46.12	54.00	-7.88	39.24	3	Vertical	20	1.80	-	32.79	6.64	32.55			
PK	5.2585G	106.34	Inf	-Inf	99.28	3	Vertical	20	1.80	-	32.92	6.66	32.52			
AV	5.2609G	94.19	Inf	-Inf	87.13	3	Vertical	20	1.80	-	32.92	6.66	32.52			
PK	5.404G	60.08	74.00	-13.92	52.50	3	Vertical	20	1.80	-	33.32	6.74	32.48			
AV	5.4046G	47.20	54.00	-6.80	39.62	3	Vertical	20	1.80	-	33.32	6.74	32.48			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5260MHz_TX

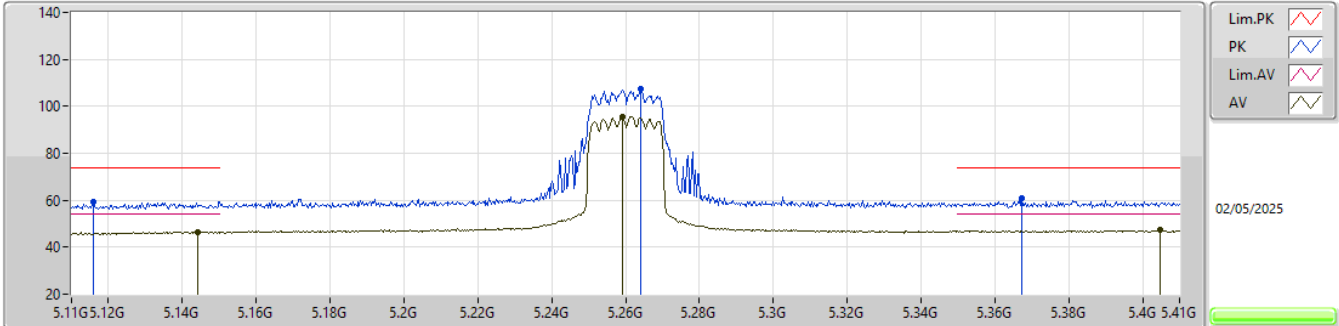


EUT_Y_2TX
Setting 14.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.116G	59.47	74.00	-14.53	52.64	3	Horizontal	12	1.80	-	32.73	6.65	32.55
AV	5.1442G	46.51	54.00	-7.49	39.63	3	Horizontal	12	1.80	-	32.79	6.64	32.55
PK	5.2642G	107.44	Inf	-Inf	100.37	3	Horizontal	12	1.80	-	32.93	6.66	32.52
AV	5.2591G	95.69	Inf	-Inf	88.63	3	Horizontal	12	1.80	-	32.92	6.66	32.52
PK	5.3674G	60.68	74.00	-13.32	53.29	3	Horizontal	12	1.80	-	33.17	6.71	32.49
AV	5.4049G	47.31	54.00	-6.69	39.73	3	Horizontal	12	1.80	-	33.32	6.74	32.48

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5260MHz_TX

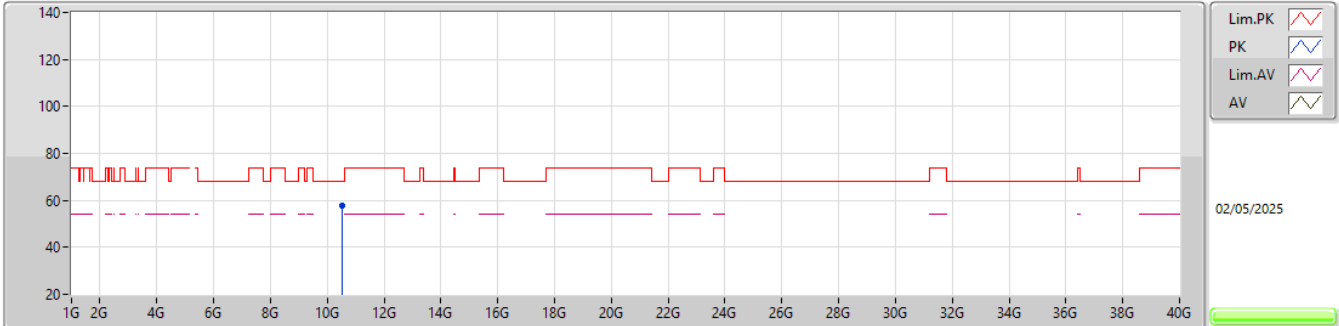


EUT_Y_2TX
Setting 14.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.52089G	58.00	68.20	-10.20	40.52	3	Vertical	94	1.64	-	39.04	10.85	32.41				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5260MHz_TX

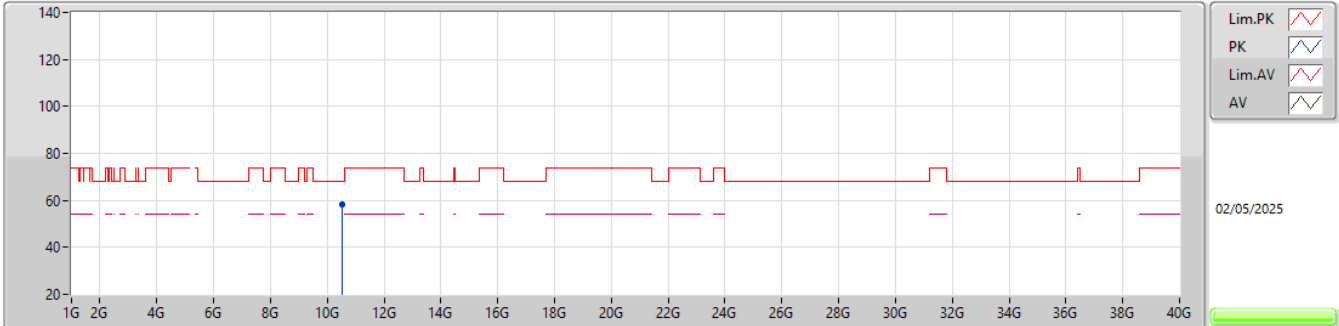


EUT_Y_2TX
Setting 14.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.52038G	58.04	68.20	-10.16	40.56	3	Horizontal	137	2.34	-	39.04	10.85	32.41				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

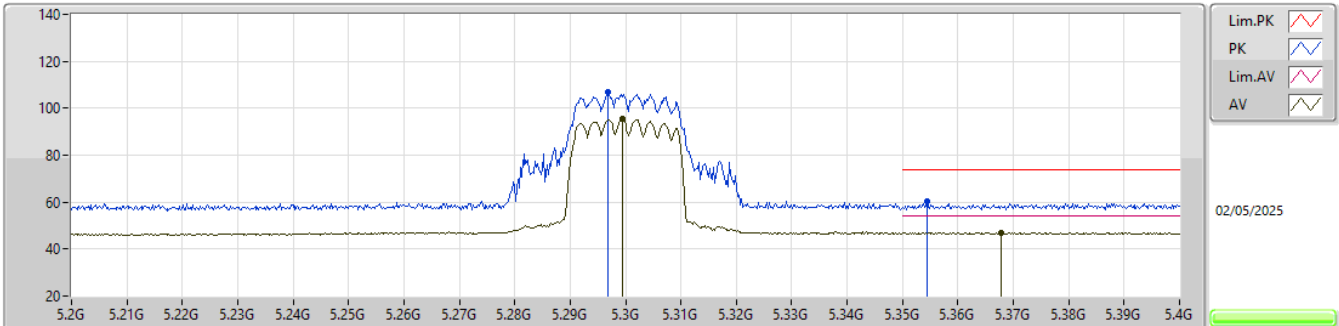


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2968G	107.06	Inf	-Inf	99.90	3	Vertical	354	1.80	-	32.99	6.68	32.51				
AV	5.2994G	95.36	Inf	-Inf	88.19	3	Vertical	354	1.80	-	33.00	6.68	32.51				
PK	5.3544G	60.11	74.00	-13.89	52.77	3	Vertical	354	1.80	-	33.12	6.71	32.49				
AV	5.3678G	47.10	54.00	-6.90	39.71	3	Vertical	354	1.80	-	33.17	6.71	32.49				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

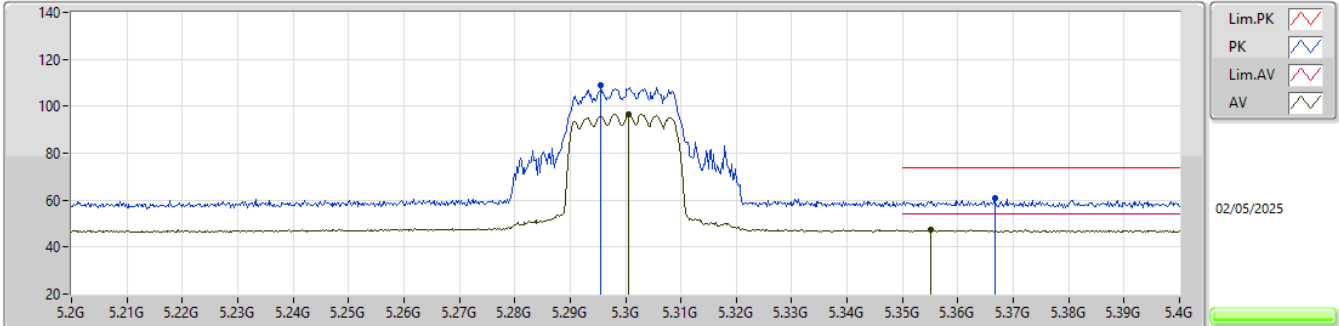


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2956G	108.87	Inf	-Inf	101.71	3	Horizontal	12	1.80	-	32.99	6.68	32.51				
AV	5.3006G	96.76	Inf	-Inf	89.59	3	Horizontal	12	1.80	-	33.00	6.68	32.51				
PK	5.3666G	60.67	74.00	-13.33	53.28	3	Horizontal	12	1.80	-	33.17	6.71	32.49				
AV	5.355G	47.23	54.00	-6.77	39.89	3	Horizontal	12	1.80	-	33.12	6.71	32.49				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

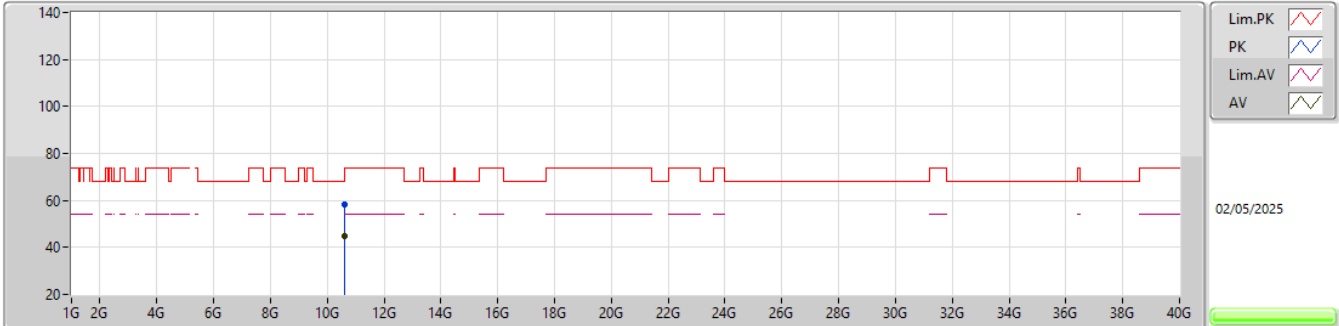


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.59936G	58.20	68.20	-10.00	40.58	3	Vertical	93	1.14	-	39.10	10.93	32.41			
AV	10.60011G	45.05	54.00	-8.95	27.43	3	Vertical	93	1.14	-	39.10	10.93	32.41			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

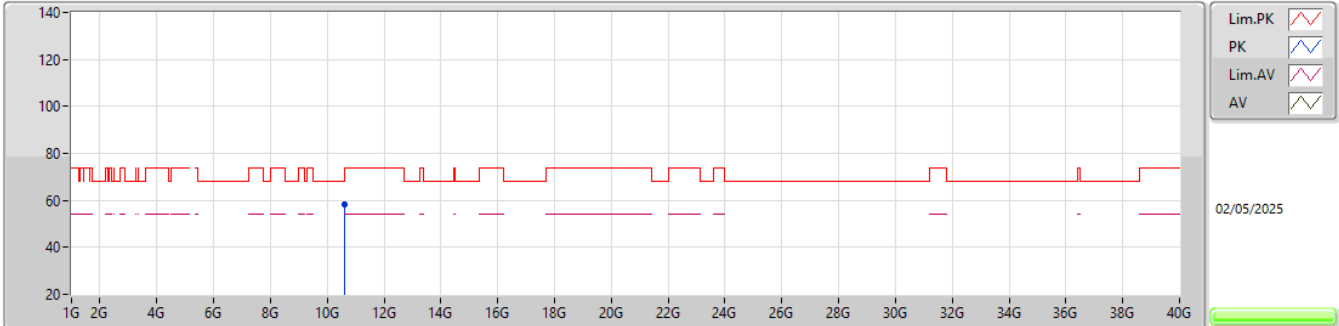


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.60083G	58.36	74.00	-15.64	40.74	3	Horizontal	164	2.32	-	39.10	10.93	32.41				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5320MHz_TX

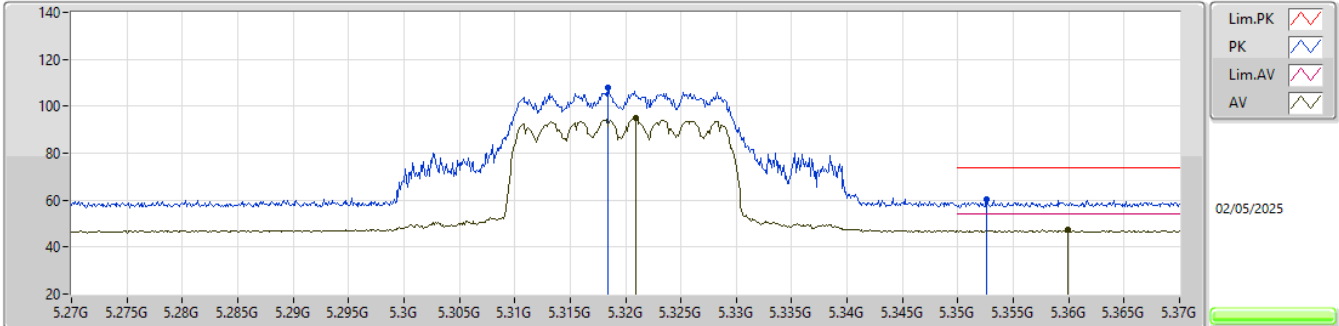


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3184G	107.86	Inf	-Inf	100.63	3	Vertical	355	1.80	-	33.04	6.69	32.50				
AV	5.3209G	94.91	Inf	-Inf	87.68	3	Vertical	355	1.80	-	33.04	6.69	32.50				
PK	5.3526G	60.58	74.00	-13.42	53.26	3	Vertical	355	1.80	-	33.11	6.71	32.50				
AV	5.3599G	47.23	54.00	-6.77	39.87	3	Vertical	355	1.80	-	33.14	6.71	32.49				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5320MHz_TX

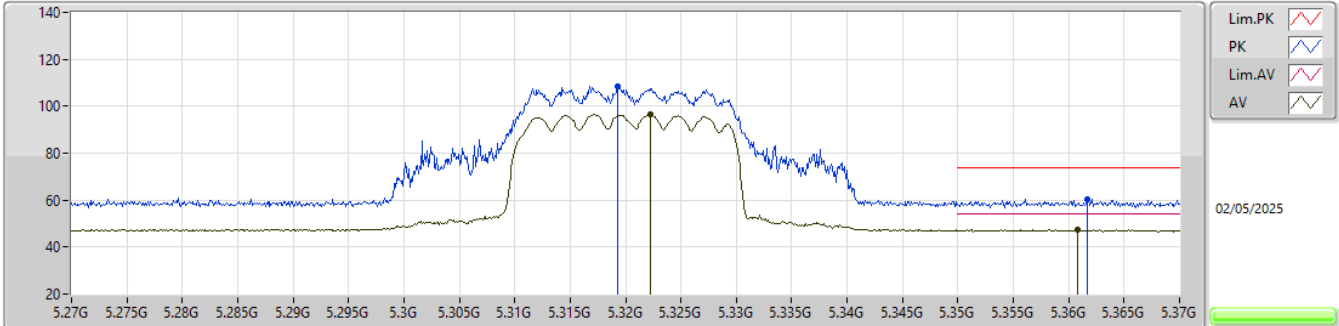


EUT Y_2TX
Setting 14
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3193G	108.62	Inf	-Inf	101.39	3	Horizontal	8	1.80	-	33.04	6.69	32.50			
AV	5.3222G	96.46	Inf	-Inf	89.23	3	Horizontal	8	1.80	-	33.04	6.69	32.50			
PK	5.3617G	60.44	74.00	-13.56	53.07	3	Horizontal	8	1.80	-	33.15	6.71	32.49			
AV	5.3608G	47.32	54.00	-6.68	39.96	3	Horizontal	8	1.80	-	33.14	6.71	32.49			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5320MHz_TX

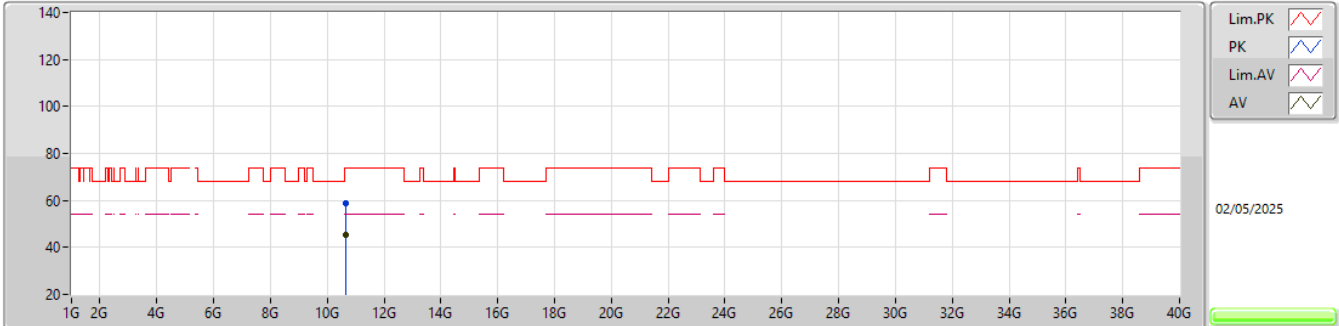


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6392G	58.83	74.00	-15.17	41.10	3	Vertical	20	2.79	-	39.18	10.97	32.42			
AV	10.64004G	45.33	54.00	-8.67	27.60	3	Vertical	20	2.79	-	39.18	10.97	32.42			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5320MHz_TX

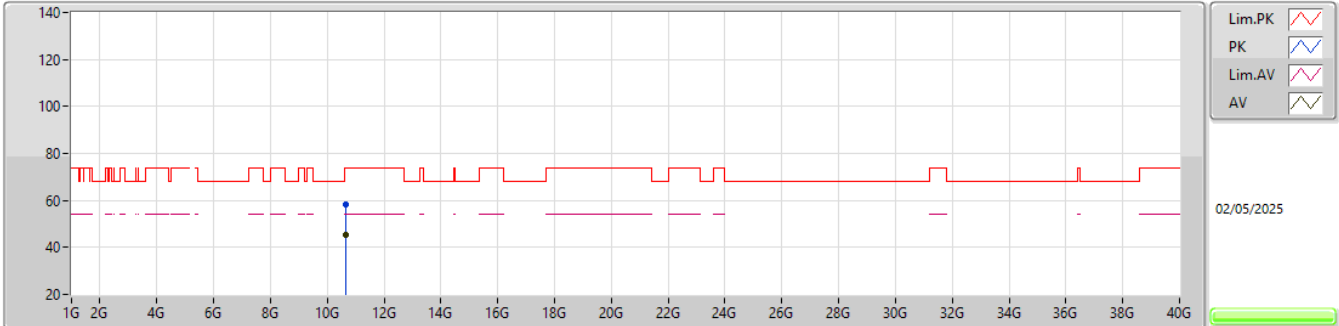


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.63972G	58.31	74.00	-15.69	40.58	3	Horizontal	131	2.87	-	39.18	10.97	32.42			
AV	10.63907G	45.20	54.00	-8.80	27.47	3	Horizontal	131	2.87	-	39.18	10.97	32.42			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TX

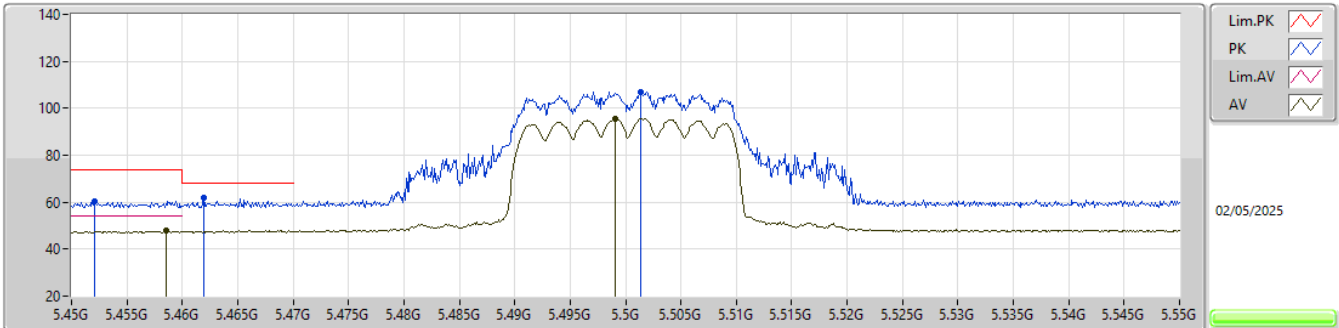


EUT Y_2TX
Setting 15
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4521G	60.48	74.00	-13.52	52.61	3	Vertical	47	1.80	-	33.51	6.83	32.47			
PK	5.4619G	61.97	68.20	-6.23	54.03	3	Vertical	47	1.80	-	33.57	6.84	32.47			
AV	5.4585G	47.68	54.00	-6.32	39.76	3	Vertical	47	1.80	-	33.55	6.84	32.47			
PK	5.5014G	106.97	Inf	-Inf	98.71	3	Vertical	47	1.80	-	33.80	6.92	32.46			
AV	5.4991G	95.65	Inf	-Inf	87.41	3	Vertical	47	1.80	-	33.79	6.91	32.46			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TX

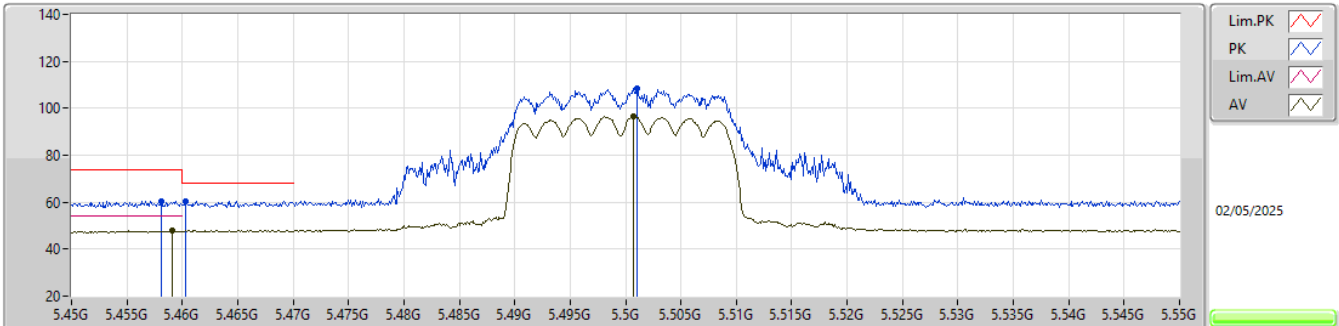


EUT Y_2TX
Setting 15
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4581G	60.58	74.00	-13.42	52.66	3	Horizontal	20	1.80	-	33.55	6.84	32.47			
AV	5.4591G	47.84	54.00	-6.16	39.92	3	Horizontal	20	1.80	-	33.55	6.84	32.47			
PK	5.4603G	60.51	68.20	-7.69	52.58	3	Horizontal	20	1.80	-	33.56	6.84	32.47			
PK	5.501G	108.59	Inf	-Inf	100.33	3	Horizontal	20	1.80	-	33.80	6.92	32.46			
AV	5.5007G	96.68	Inf	-Inf	88.42	3	Horizontal	20	1.80	-	33.80	6.92	32.46			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TX

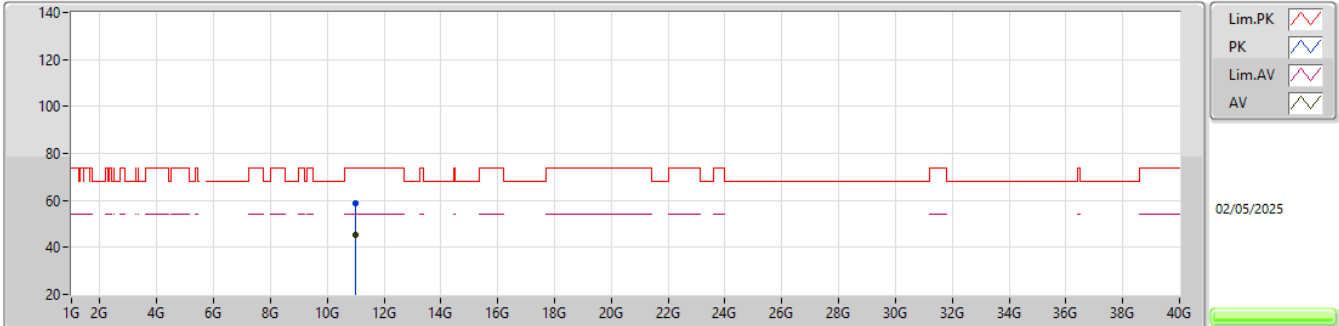


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.00042G	58.71	74.00	-15.29	40.70	3	Vertical	225	1.75	-	39.10	11.34	32.43			
AV	11.00004G	45.50	54.00	-8.50	27.49	3	Vertical	225	1.75	-	39.10	11.34	32.43			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TX

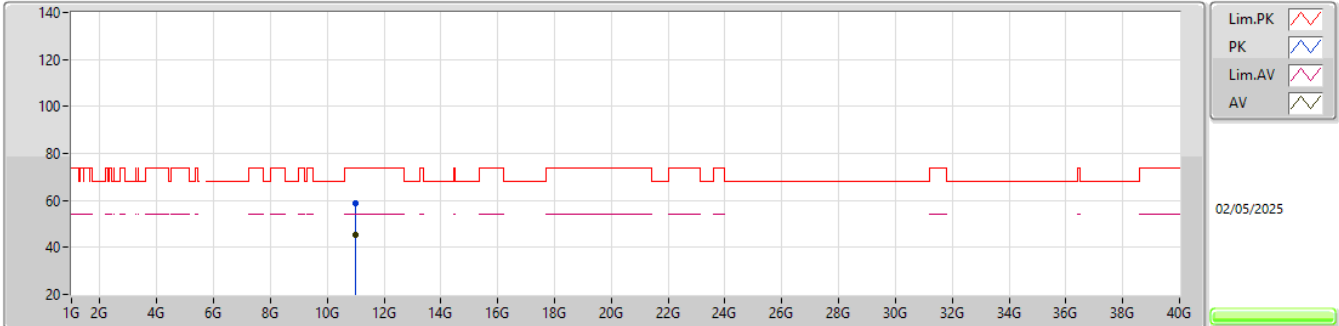


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.99986G	58.93	74.00	-15.07	40.92	3	Horizontal	332	2.16	-	39.10	11.34	32.43			
AV	10.99959G	45.45	54.00	-8.55	27.44	3	Horizontal	332	2.16	-	39.10	11.34	32.43			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TX

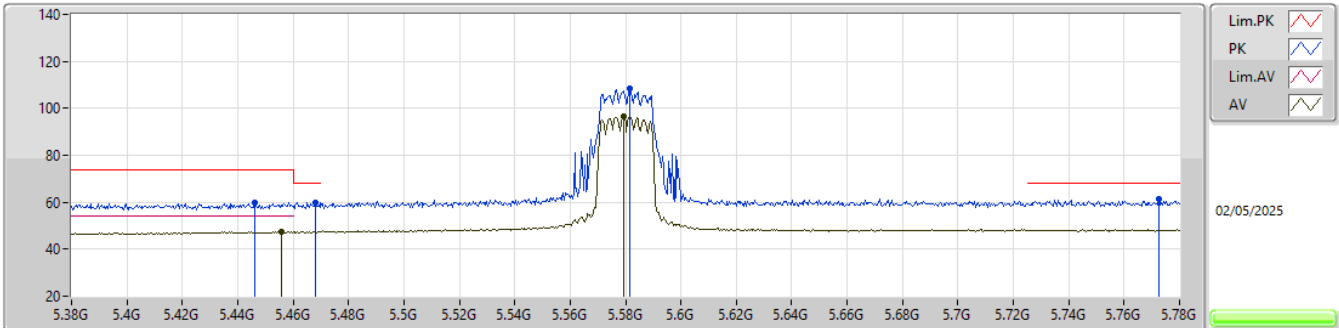


EUT_Y_2TX
Setting 15.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.446G	59.79	74.00	-14.21	51.96	3	Vertical	46	1.80	-	33.48	6.82	32.47			
AV	5.456G	47.42	54.00	-6.58	39.52	3	Vertical	46	1.80	-	33.54	6.83	32.47			
PK	5.468G	60.05	68.20	-8.15	52.05	3	Vertical	46	1.80	-	33.61	6.86	32.47			
PK	5.5816G	108.57	Inf	-Inf	100.06	3	Vertical	46	1.80	-	33.90	7.07	32.46			
AV	5.5792G	96.76	Inf	-Inf	88.26	3	Vertical	46	1.80	-	33.90	7.06	32.46			
PK	5.7724G	61.17	68.20	-7.03	52.16	3	Vertical	46	1.80	-	34.14	7.32	32.45			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TX

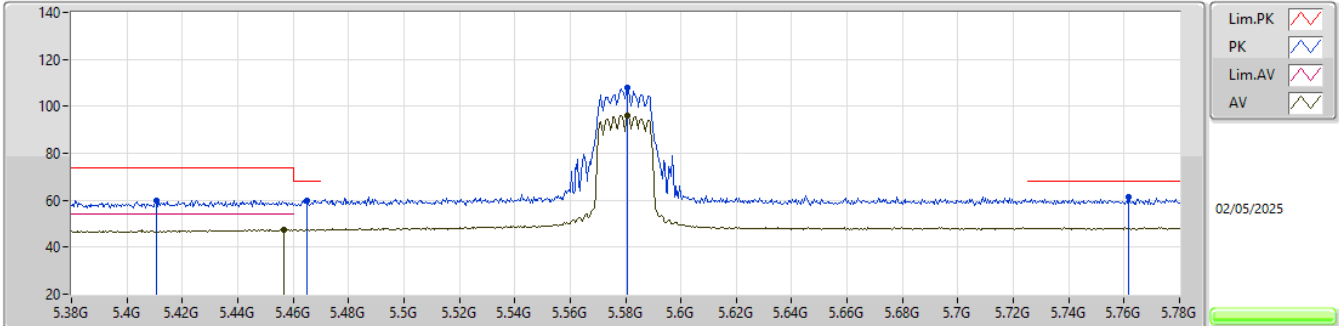


EUT_Y_2TX
Setting 15.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4108G	60.01	74.00	-13.99	52.40	3	Horizontal	20	1.80	-	33.34	6.75	32.48			
PK	5.4652G	60.05	68.20	-8.15	52.08	3	Horizontal	20	1.80	-	33.59	6.85	32.47			
AV	5.4568G	47.67	54.00	-6.33	39.76	3	Horizontal	20	1.80	-	33.54	6.84	32.47			
PK	5.5808G	107.87	Inf	-Inf	99.37	3	Horizontal	20	1.80	-	33.90	7.06	32.46			
AV	5.5808G	96.11	Inf	-Inf	87.61	3	Horizontal	20	1.80	-	33.90	7.06	32.46			
PK	5.7616G	61.18	68.20	-7.02	52.21	3	Horizontal	20	1.80	-	34.12	7.30	32.45			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TX

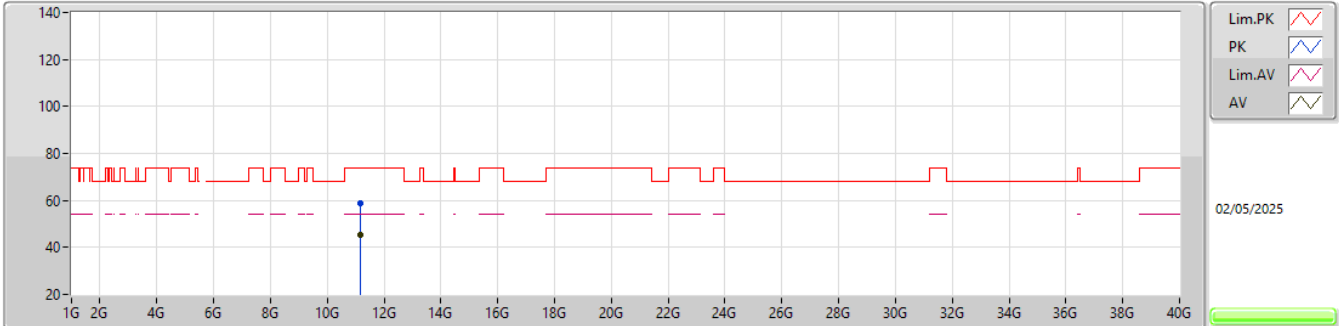


EUT_Y_2TX
Setting 15.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.16052G	58.69	74.00	-15.31	40.87	3	Vertical	210	1.46	-	38.80	11.50	32.48			
AV	11.15943G	45.13	54.00	-8.87	27.31	3	Vertical	210	1.46	-	38.80	11.50	32.48			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TX

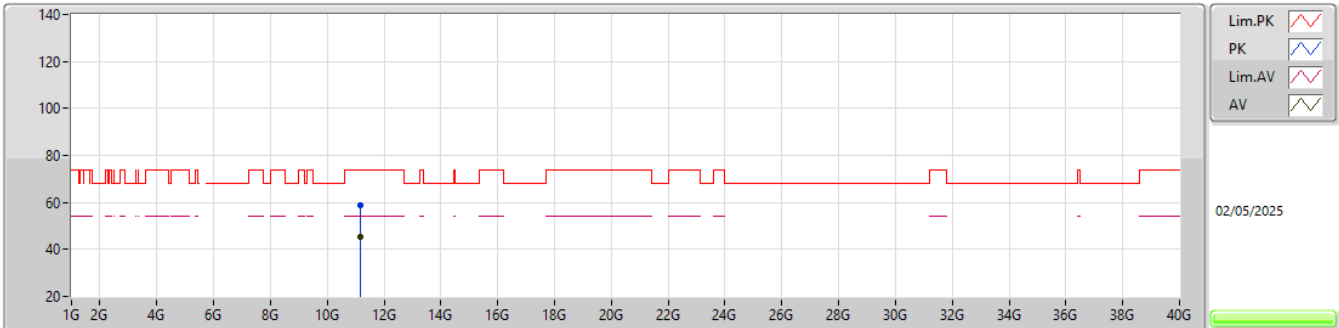


EUT_Y_2TX
Setting 15.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.15964G	58.66	74.00	-15.34	40.84	3	Horizontal	21	2.56	-	38.80	11.50	32.48			
AV	11.15954G	45.30	54.00	-8.70	27.48	3	Horizontal	21	2.56	-	38.80	11.50	32.48			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TX

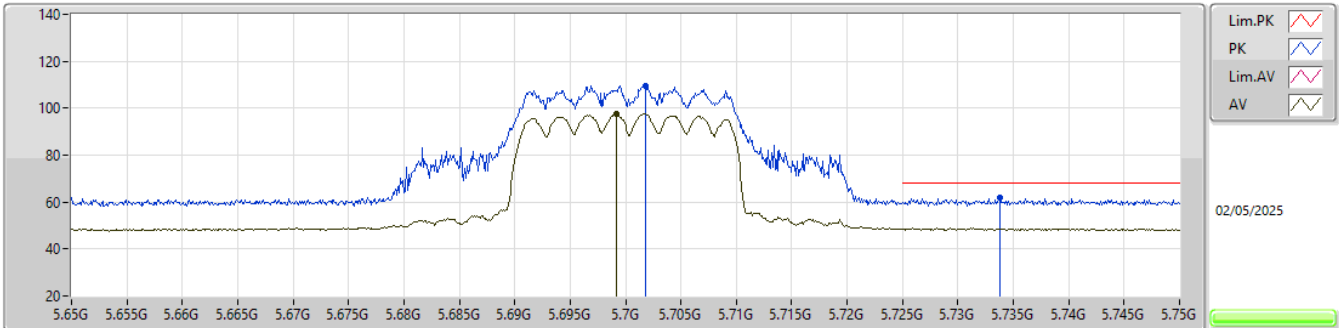


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7018G	109.66	Inf	-Inf	100.78	3	Vertical	56	1.80	-	34.10	7.23	32.45			
AV	5.6992G	97.67	Inf	-Inf	88.80	3	Vertical	56	1.80	-	34.10	7.22	32.45			
PK	5.7338G	61.77	68.20	-6.43	52.85	3	Vertical	56	1.80	-	34.10	7.27	32.45			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5700MHz_TX

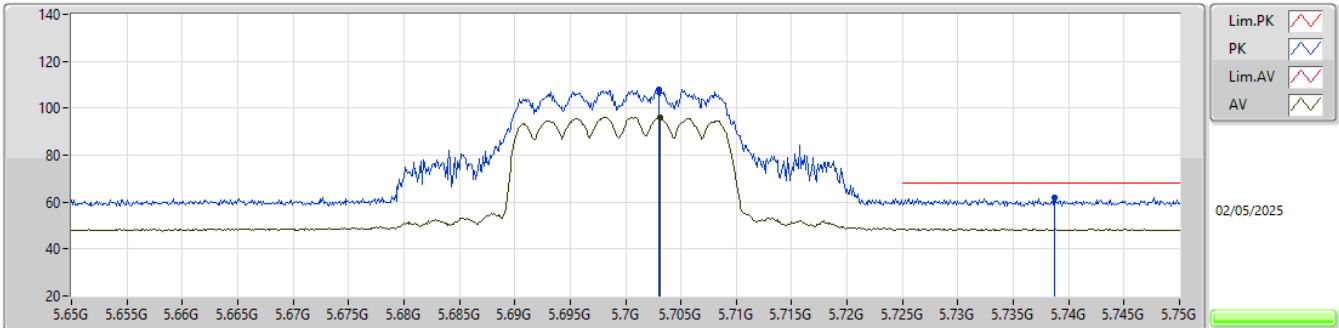EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.703G	107.85	Inf	-Inf	98.97	3	Horizontal	325	1.80	-	34.10	7.23	32.45			
AV	5.7031G	96.18	Inf	-Inf	87.30	3	Horizontal	325	1.80	-	34.10	7.23	32.45			
PK	5.7387G	62.03	68.20	-6.17	53.11	3	Horizontal	325	1.80	-	34.10	7.27	32.45			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TX

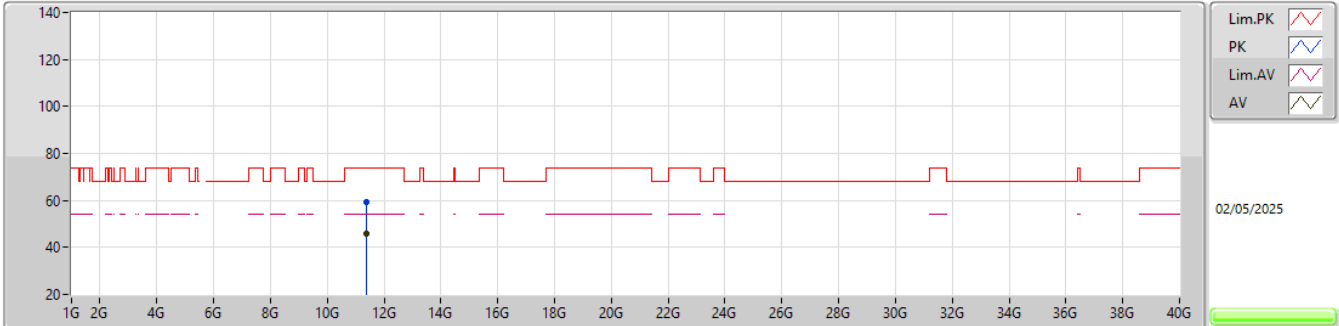


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.39979G	59.39	74.00	-14.61	41.09	3	Vertical	187	2.90	-	39.10	11.75	32.55			
AV	11.39977G	45.85	54.00	-8.15	27.55	3	Vertical	187	2.90	-	39.10	11.75	32.55			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TX

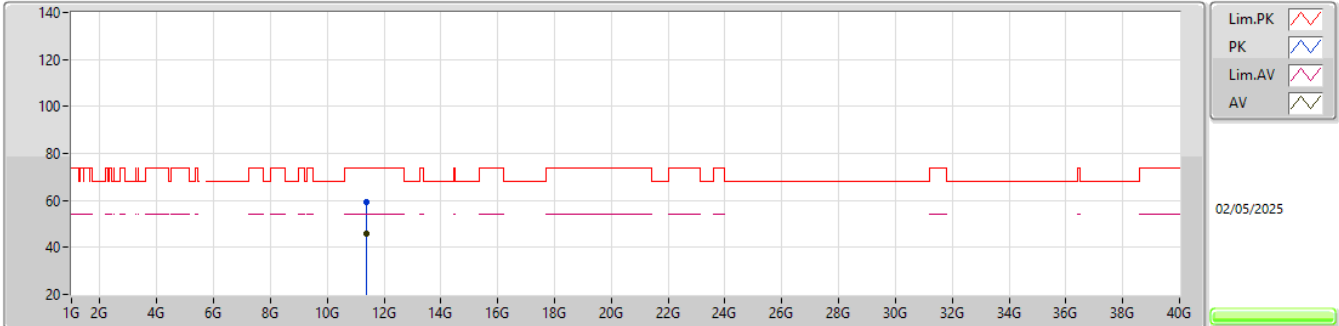


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.39959G	59.12	74.00	-14.88	40.82	3	Horizontal	249	2.06	-	39.10	11.75	32.55			
AV	11.39938G	45.85	54.00	-8.15	27.55	3	Horizontal	249	2.06	-	39.10	11.75	32.55			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

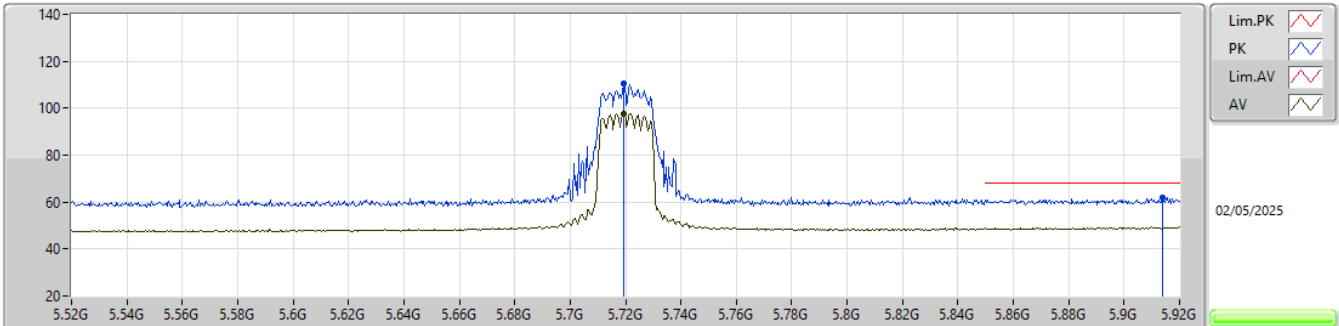


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7192G	110.48	Inf	-Inf	101.58	3	Vertical	52	1.80	-	34.10	7.25	32.45			
AV	5.7192G	97.75	Inf	-Inf	88.85	3	Vertical	52	1.80	-	34.10	7.25	32.45			
PK	5.914G	61.86	68.20	-6.34	51.98	3	Vertical	52	1.80	-	34.88	7.44	32.44			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

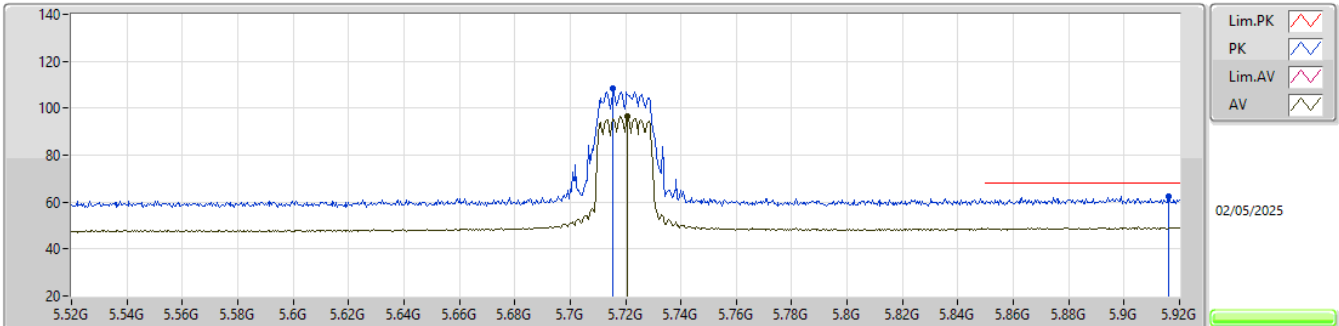


EUT Y_2TX
Setting 15
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7156G	108.57	Inf	-Inf	99.68	3	Horizontal	325	1.80	-	34.10	7.24	32.45			
AV	5.7208G	96.78	Inf	-Inf	87.88	3	Horizontal	325	1.80	-	34.10	7.25	32.45			
PK	5.916G	62.57	68.20	-5.63	52.67	3	Horizontal	325	1.80	-	34.90	7.44	32.44			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

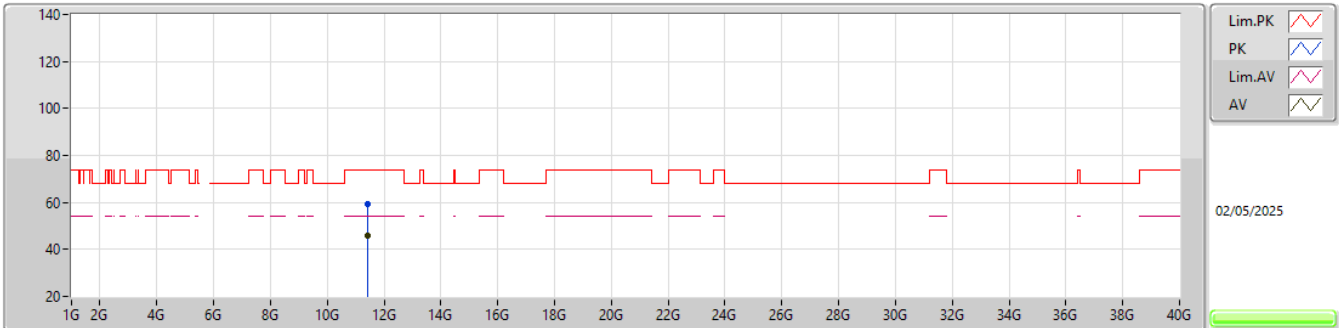


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.44028G	59.39	74.00	-14.61	41.14	3	Vertical	293	2.03	-	39.02	11.79	32.56			
AV	11.43989G	45.96	54.00	-8.04	27.71	3	Vertical	293	2.03	-	39.02	11.79	32.56			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

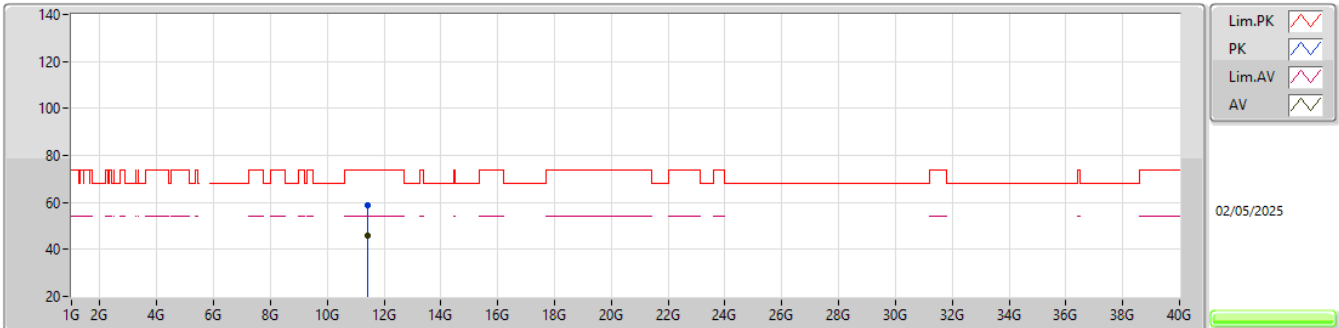


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43953G	58.96	74.00	-15.04	40.71	3	Horizontal	357	1.55	-	39.02	11.79	32.56			
AV	11.43946G	46.01	54.00	-7.99	27.76	3	Horizontal	357	1.55	-	39.02	11.79	32.56			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TX

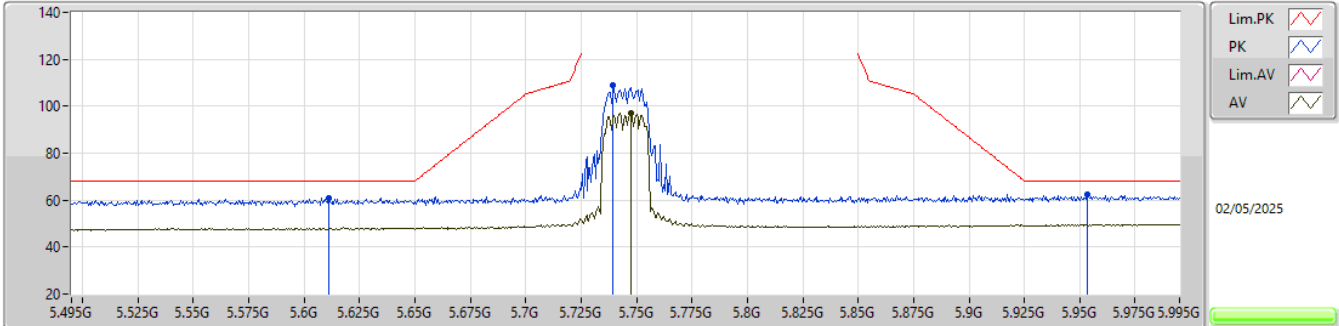


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.611G	61.02	68.20	-7.18	52.45	3	Vertical	27	1.80	-	33.92	7.11	32.46
PK	5.7395G	108.92	Inf	-Inf	100.00	3	Vertical	27	1.80	-	34.10	7.27	32.45
AV	5.7475G	97.01	Inf	-Inf	88.08	3	Vertical	27	1.80	-	34.10	7.28	32.45
PK	5.9535G	62.31	68.20	-5.89	52.17	3	Vertical	27	1.80	-	35.11	7.47	32.44

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TX

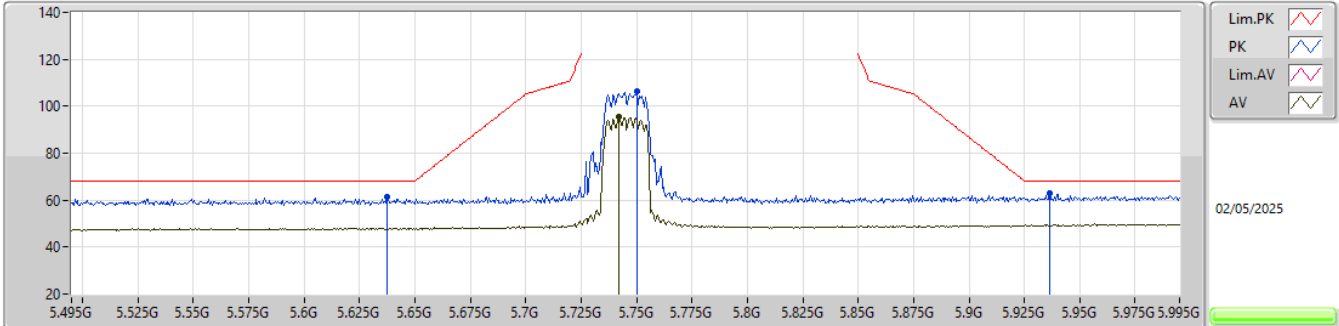


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6375G	61.55	68.20	-6.65	52.87	3	Horizontal	33	1.80	-	33.98	7.15	32.45			
PK	5.75G	106.37	Inf	-Inf	97.43	3	Horizontal	33	1.80	-	34.10	7.29	32.45			
AV	5.742G	95.47	Inf	-Inf	86.54	3	Horizontal	33	1.80	-	34.10	7.28	32.45			
PK	5.9365G	62.71	68.20	-5.49	52.68	3	Horizontal	33	1.80	-	35.02	7.45	32.44			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TX

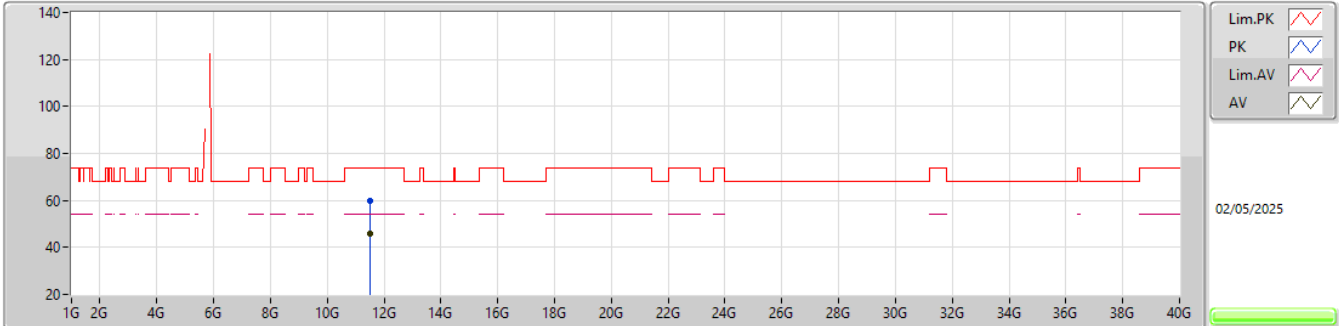


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.48902G	59.61	74.00	-14.39	41.43	3	Vertical	304	2.26	-	38.92	11.84	32.58			
AV	11.49072G	45.91	54.00	-8.09	27.73	3	Vertical	304	2.26	-	38.92	11.84	32.58			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TX

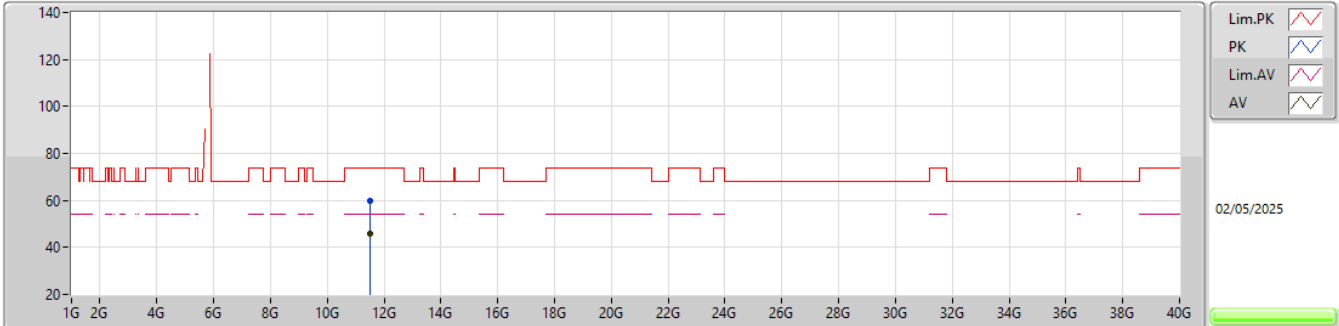


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.49025G	59.66	74.00	-14.34	41.48	3	Horizontal	135	1.35	-	38.92	11.84	32.58			
AV	11.49086G	45.98	54.00	-8.02	27.80	3	Horizontal	135	1.35	-	38.92	11.84	32.58			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TX

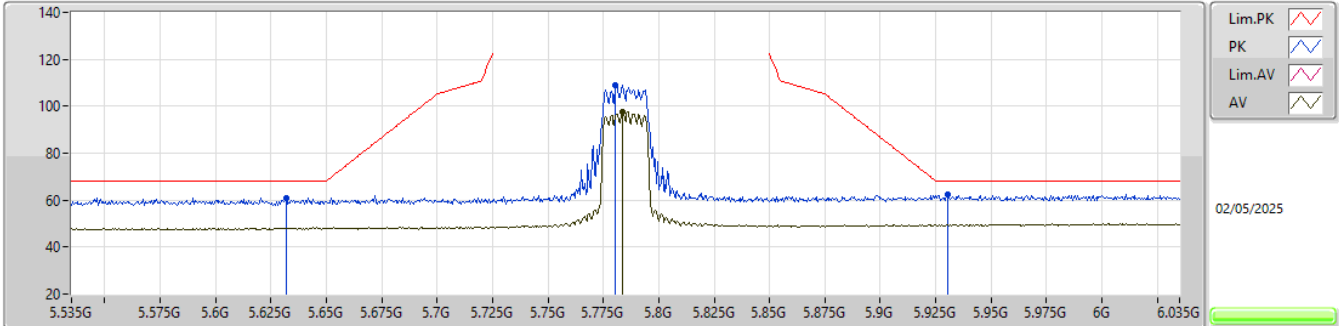


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.632G	60.96	68.20	-7.24	52.31	3	Vertical	29	1.80	-	33.96	7.14	32.45				
PK	5.7805G	109.03	Inf	-Inf	99.99	3	Vertical	29	1.80	-	34.16	7.33	32.45				
AV	5.7835G	97.80	Inf	-Inf	88.75	3	Vertical	29	1.80	-	34.17	7.33	32.45				
PK	5.9305G	62.62	68.20	-5.58	52.63	3	Vertical	29	1.80	-	34.98	7.45	32.44				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TX

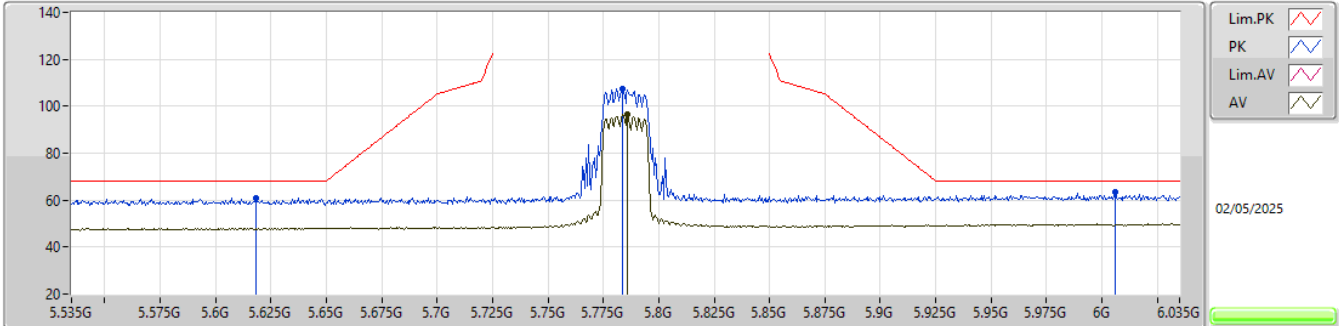


EUT_Y_2TX
Setting 15
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.618G	61.07	68.20	-7.13	52.47	3	Horizontal	323	1.80	-	33.94	7.12	32.46			
PK	5.7835G	107.47	Inf	-Inf	98.42	3	Horizontal	323	1.80	-	34.17	7.33	32.45			
AV	5.786G	96.71	Inf	-Inf	87.66	3	Horizontal	323	1.80	-	34.17	7.33	32.45			
PK	6.006G	63.62	68.20	-4.58	53.25	3	Horizontal	323	1.80	-	35.31	7.50	32.44			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TX

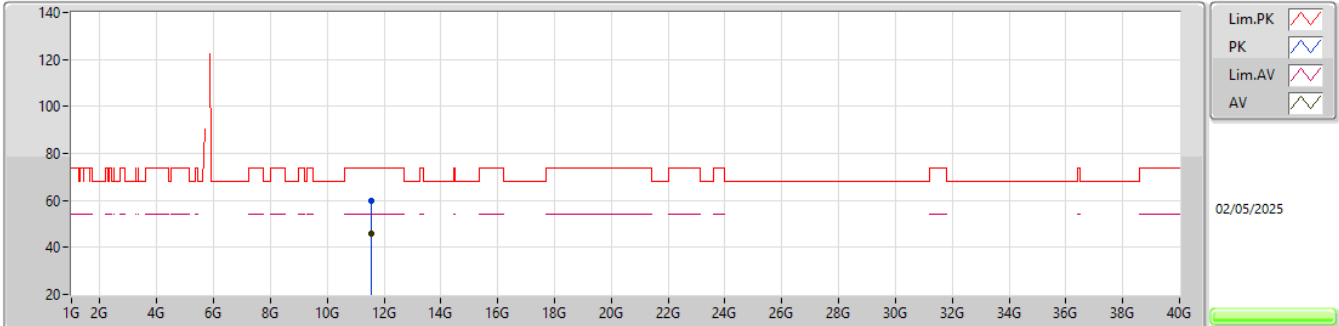


EUT_Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.57049G	59.93	74.00	-14.07	41.66	3	Vertical	16	2.77	-	38.96	11.92	32.61			
AV	11.5706G	46.08	54.00	-7.92	27.81	3	Vertical	16	2.77	-	38.96	11.92	32.61			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TX

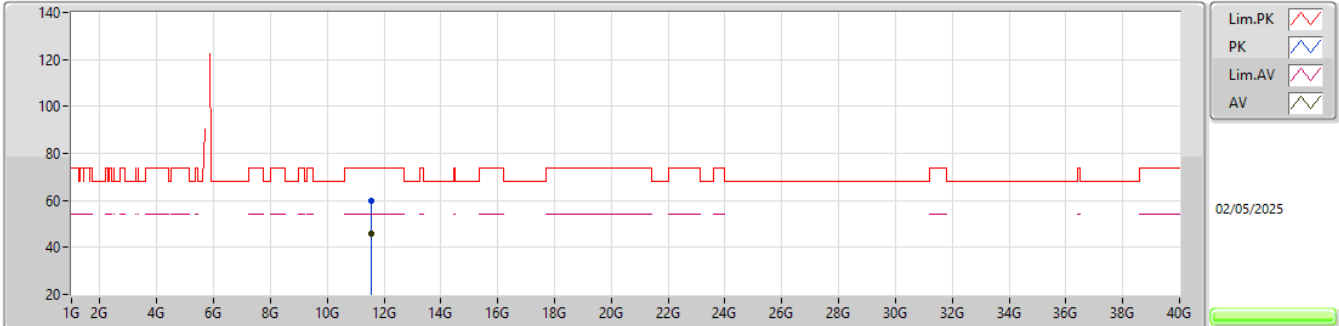


EUT Y_2TX
Setting 15
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.56948G	59.62	74.00	-14.38	41.35	3	Horizontal	294	2.74	-	38.96	11.92	32.61			
AV	11.56931G	46.10	54.00	-7.90	27.83	3	Horizontal	294	2.74	-	38.96	11.92	32.61			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TX

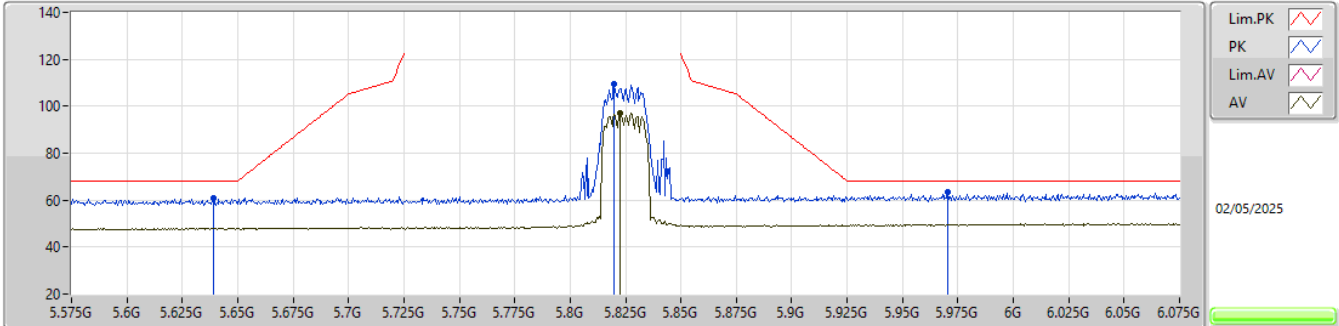


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.639G	60.72	68.20	-7.48	52.04	3	Vertical	26	1.80	-	33.98	7.15	32.45			
PK	5.82G	109.24	Inf	-Inf	100.00	3	Vertical	26	1.80	-	34.32	7.37	32.45			
AV	5.8225G	96.98	Inf	-Inf	87.72	3	Vertical	26	1.80	-	34.34	7.37	32.45			
PK	5.9705G	63.55	68.20	-4.65	53.33	3	Vertical	26	1.80	-	35.18	7.48	32.44			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TX

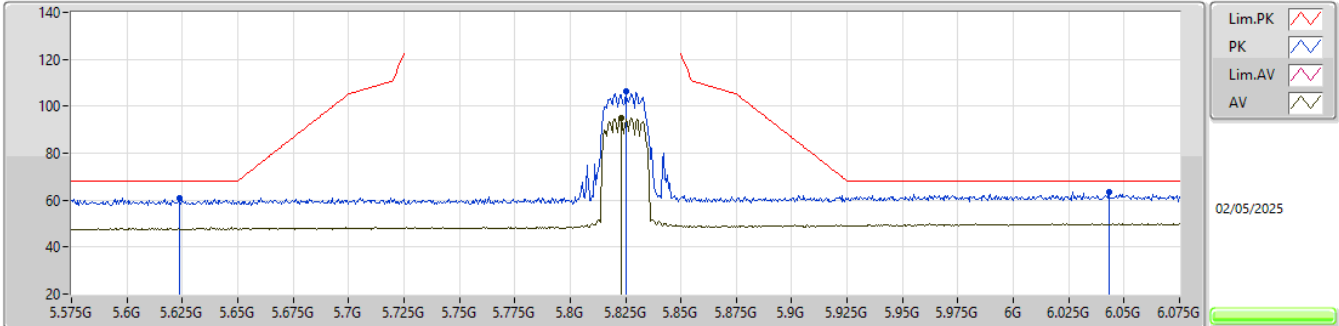


EUT_Y_2TX
Setting 13.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6235G	60.68	68.20	-7.52	52.06	3	Horizontal	359	1.80	-	33.95	7.13	32.46			
PK	5.825G	106.50	Inf	-Inf	97.23	3	Horizontal	359	1.80	-	34.35	7.37	32.45			
AV	5.823G	95.22	Inf	-Inf	85.96	3	Horizontal	359	1.80	-	34.34	7.37	32.45			
PK	6.043G	63.25	68.20	-4.95	52.77	3	Horizontal	359	1.80	-	35.39	7.52	32.43			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TX

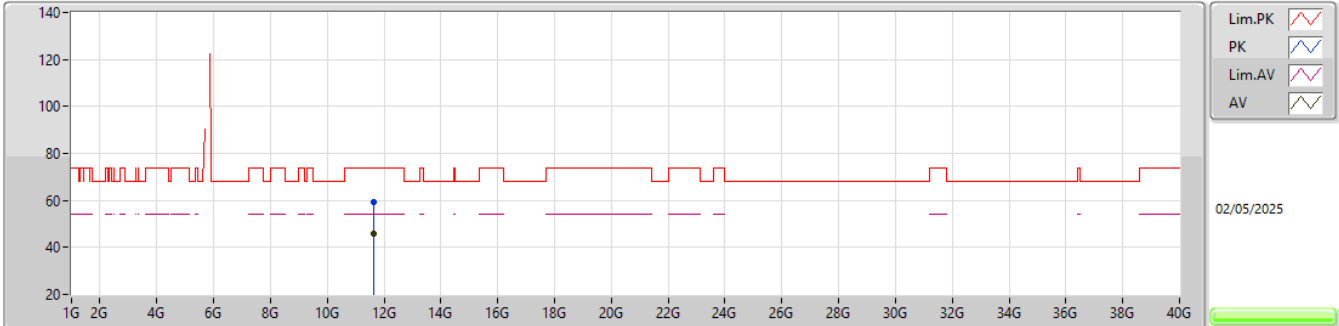


EUT Y_2TX
Setting 13.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.64988G	59.22	74.00	-14.78	40.97	3	Vertical	73	1.11	-	38.90	12.00	32.65			
AV	11.64933G	45.91	54.00	-8.09	27.66	3	Vertical	73	1.11	-	38.90	12.00	32.65			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TX

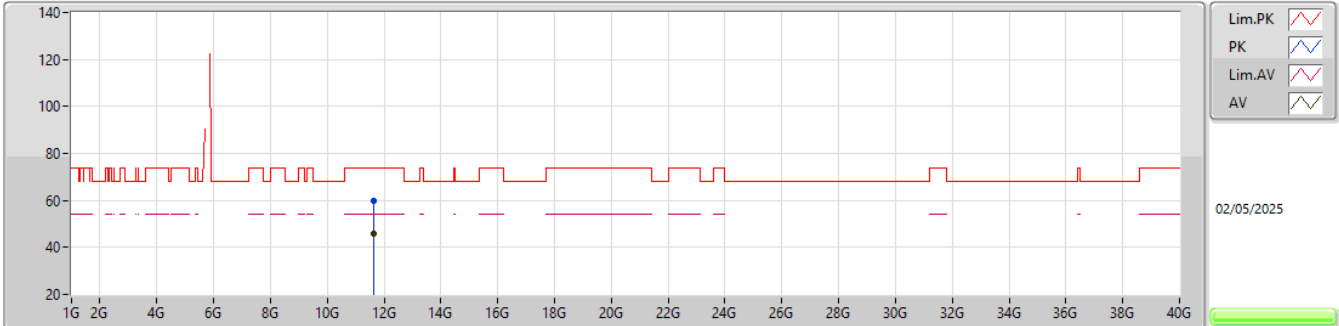


EUT_Y_2TX
Setting 13.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.6504G	59.95	74.00	-14.05	41.70	3	Horizontal	65	2.34	-	38.90	12.00	32.65			
AV	11.64901G	45.96	54.00	-8.04	27.71	3	Horizontal	65	2.34	-	38.90	12.00	32.65			

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5190MHz_TX

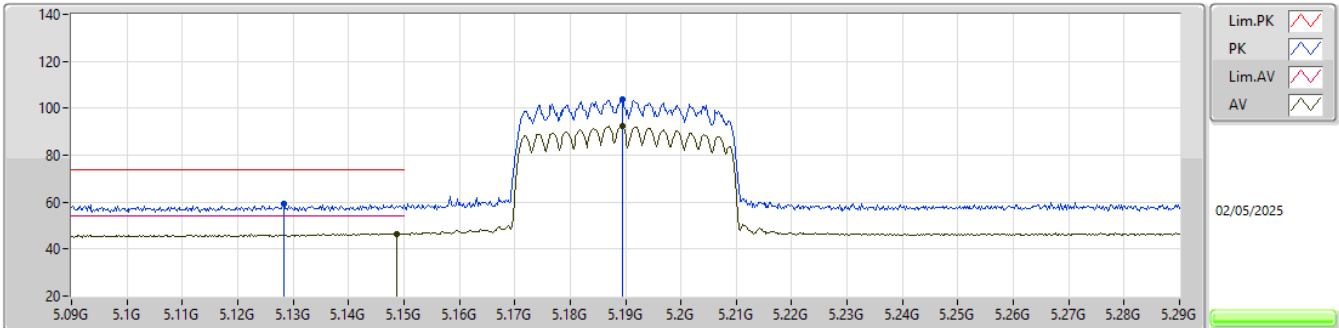


EUT_Y_2TX
Setting 12.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1284G	59.20	74.00	-14.80	52.35	3	Vertical	12	2.94	-	32.76	6.64	32.55				
AV	5.1486G	46.58	54.00	-7.42	39.68	3	Vertical	12	2.94	-	32.80	6.64	32.54				
PK	5.1894G	103.96	Inf	-Inf	96.98	3	Vertical	12	2.94	-	32.88	6.63	32.53				
AV	5.1894G	92.48	Inf	-Inf	85.50	3	Vertical	12	2.94	-	32.88	6.63	32.53				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5190MHz_TX

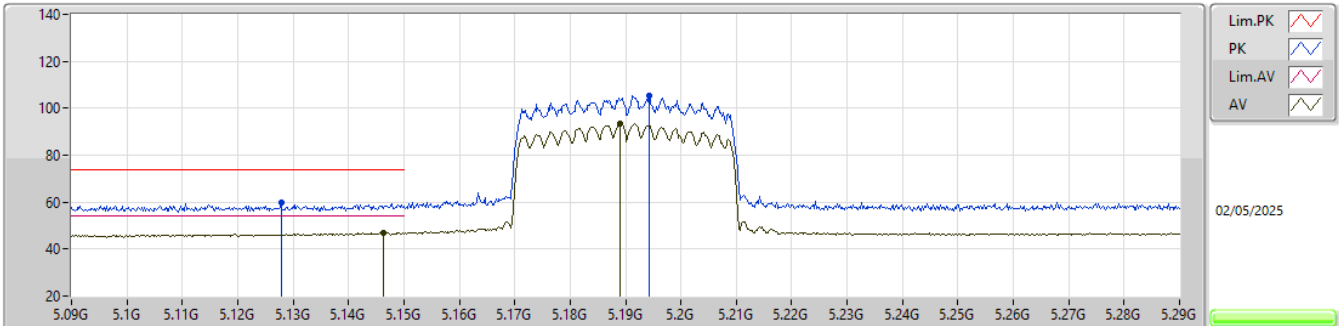EUT_Y_2TX
Setting 12.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1278G	59.82	74.00	-14.18	52.97	3	Horizontal	12	1.80	-	32.76	6.64	32.55			
AV	5.1462G	47.01	54.00	-6.99	40.12	3	Horizontal	12	1.80	-	32.79	6.64	32.54			
PK	5.1942G	105.56	Inf	-Inf	98.57	3	Horizontal	12	1.80	-	32.89	6.63	32.53			
AV	5.189G	93.49	Inf	-Inf	86.51	3	Horizontal	12	1.80	-	32.88	6.63	32.53			

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5190MHz_TX

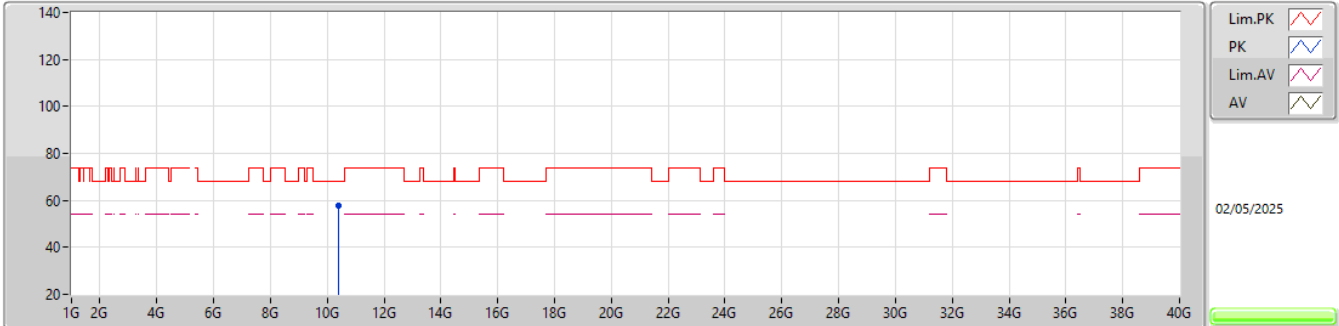


EUT_Y_2TX
Setting 12.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.37941G	57.96	68.20	-10.24	41.03	3	Vertical	158	2.59	-	38.74	10.71	32.52				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5190MHz_TX

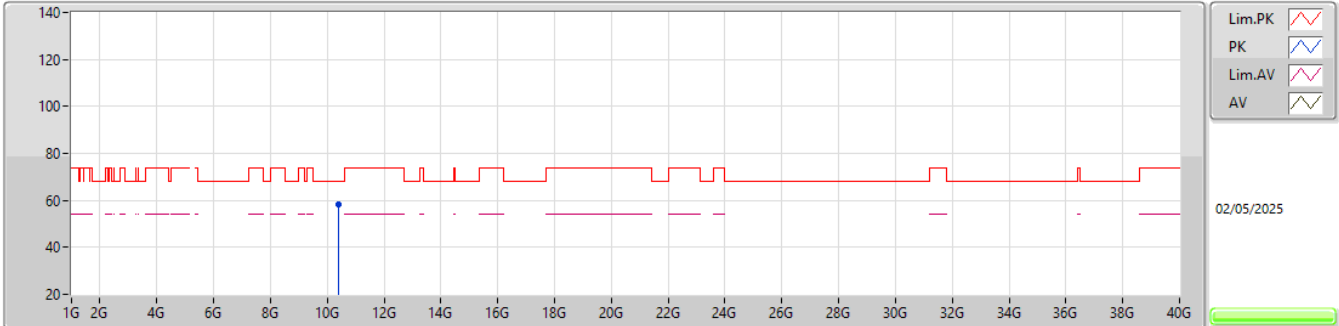


EUT_Y_2TX
Setting 12.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.38003G	58.12	68.20	-10.08	41.19	3	Horizontal	262	1.59	-	38.74	10.71	32.52				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5230MHz_TX

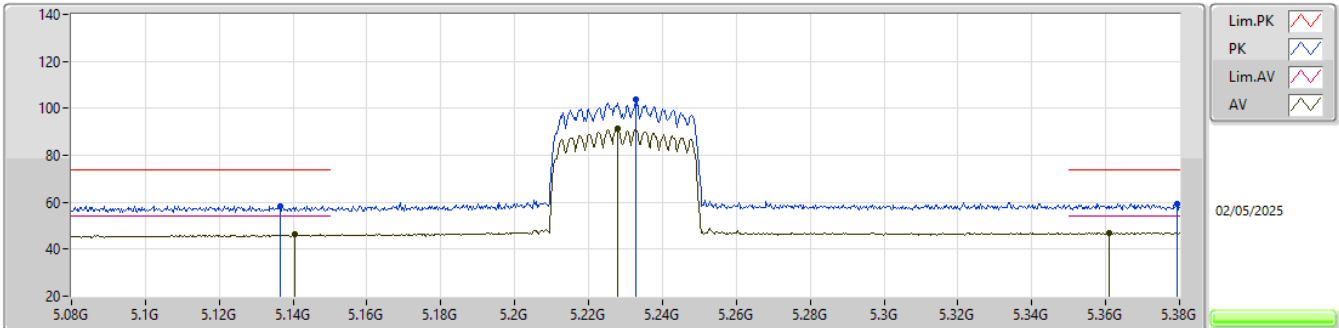EUT_Y_2TX
Setting 12
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1364G	58.51	74.00	-15.49	51.65	3	Vertical	358	1.80	-	32.77	6.64	32.55			
AV	5.1403G	46.16	54.00	-7.84	39.29	3	Vertical	358	1.80	-	32.78	6.64	32.55			
PK	5.2327G	103.71	Inf	-Inf	96.68	3	Vertical	358	1.80	-	32.90	6.65	32.52			
AV	5.2279G	91.27	Inf	-Inf	84.26	3	Vertical	358	1.80	-	32.90	6.64	32.53			
PK	5.3794G	59.17	74.00	-14.83	51.72	3	Vertical	358	1.80	-	33.22	6.72	32.49			
AV	5.3608G	47.03	54.00	-6.97	39.67	3	Vertical	358	1.80	-	33.14	6.71	32.49			

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5230MHz_TX

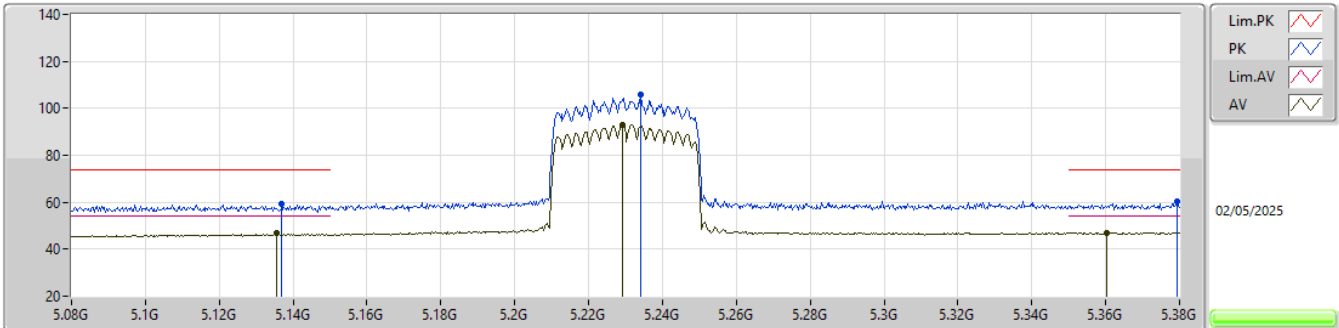EUT_Y_2TX
Setting 12
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.137G	59.16	74.00	-14.84	52.30	3	Horizontal	10	1.80	-	32.77	6.64	32.55
AV	5.1355G	46.70	54.00	-7.30	39.84	3	Horizontal	10	1.80	-	32.77	6.64	32.55
PK	5.2342G	105.78	Inf	-Inf	98.75	3	Horizontal	10	1.80	-	32.90	6.65	32.52
AV	5.2291G	93.00	Inf	-Inf	85.99	3	Horizontal	10	1.80	-	32.90	6.64	32.53
PK	5.3794G	60.55	74.00	-13.45	53.10	3	Horizontal	10	1.80	-	33.22	6.72	32.49
AV	5.3602G	47.02	54.00	-6.98	39.66	3	Horizontal	10	1.80	-	33.14	6.71	32.49

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5230MHz_TX

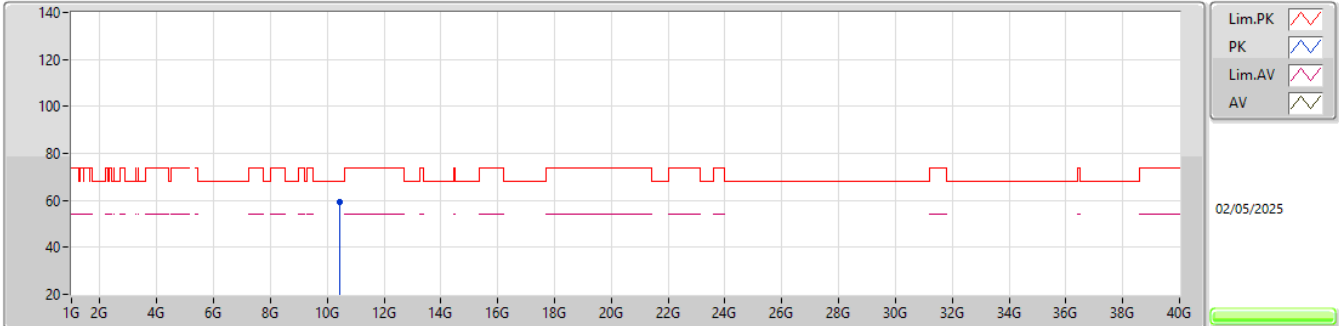


EUT_Y_2TX
Setting 12
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.45989G	59.20	68.20	-9.00	42.02	3	Vertical	204	2.46	-	38.84	10.79	32.45				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5230MHz_TX

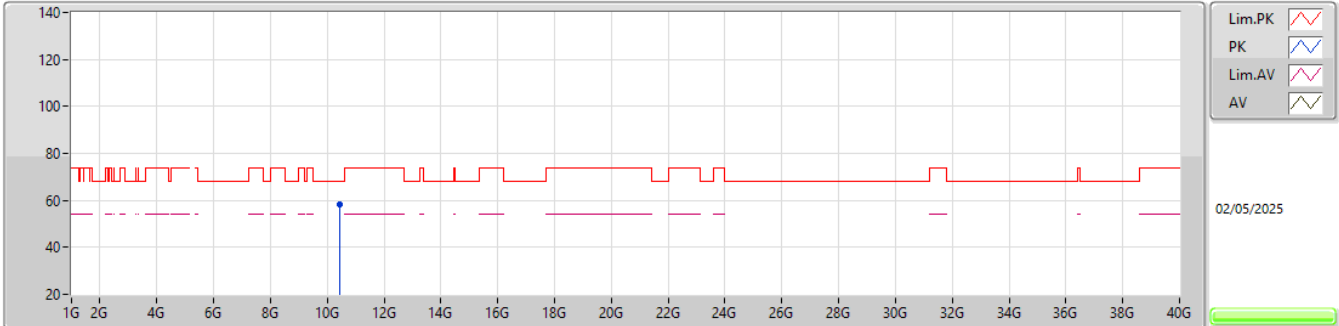


EUT_Y_2TX
Setting 12
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.45918G	58.31	68.20	-9.89	41.13	3	Horizontal	107	2.67	-	38.84	10.79	32.45				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5270MHz_TX

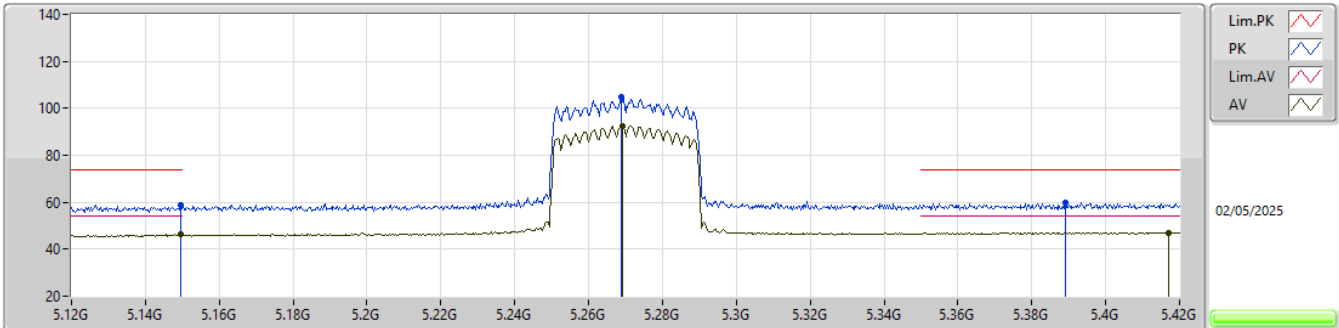EUT_Y_2TX
Setting 12.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1497G	58.90	74.00	-15.10	52.00	3	Vertical	359	3.00	-	32.80	6.64	32.54			
AV	5.1497G	46.26	54.00	-7.74	39.36	3	Vertical	359	3.00	-	32.80	6.64	32.54			
PK	5.2688G	104.99	Inf	-Inf	97.91	3	Vertical	359	3.00	-	32.94	6.66	32.52			
AV	5.2691G	92.64	Inf	-Inf	85.56	3	Vertical	359	3.00	-	32.94	6.66	32.52			
PK	5.3891G	59.84	74.00	-14.16	52.35	3	Vertical	359	3.00	-	33.26	6.72	32.49			
AV	5.417G	47.08	54.00	-6.92	39.43	3	Vertical	359	3.00	-	33.37	6.76	32.48			

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TX

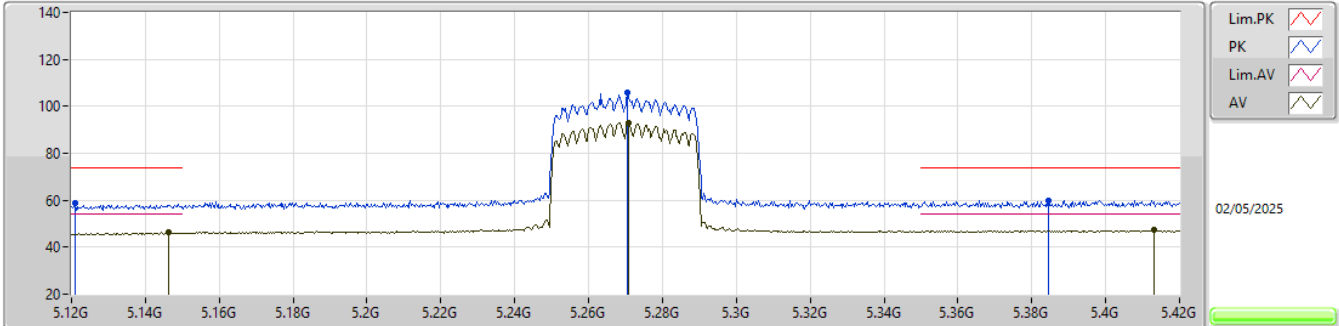


EUT_Y_2TX
Setting 12.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1209G	58.69	74.00	-15.31	51.85	3	Horizontal	6	1.80	-	32.74	6.65	32.55			
AV	5.1464G	46.22	54.00	-7.78	39.33	3	Horizontal	6	1.80	-	32.79	6.64	32.54			
PK	5.2706G	105.85	Inf	-Inf	98.76	3	Horizontal	6	1.80	-	32.94	6.67	32.52			
AV	5.2709G	93.14	Inf	-Inf	86.04	3	Horizontal	6	1.80	-	32.94	6.67	32.51			
PK	5.3846G	59.87	74.00	-14.13	52.40	3	Horizontal	6	1.80	-	33.24	6.72	32.49			
AV	5.4131G	47.22	54.00	-6.78	39.60	3	Horizontal	6	1.80	-	33.35	6.75	32.48			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5270MHz_TX

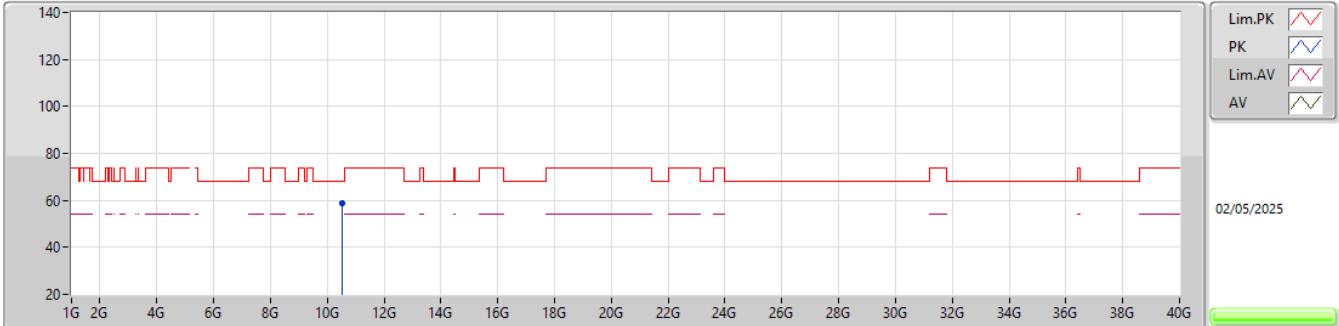


EUT_Y_2TX
Setting 12.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.53978G	58.91	68.20	-9.29	41.37	3	Vertical	232	2.71	-	39.08	10.87	32.41				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5270MHz_TX

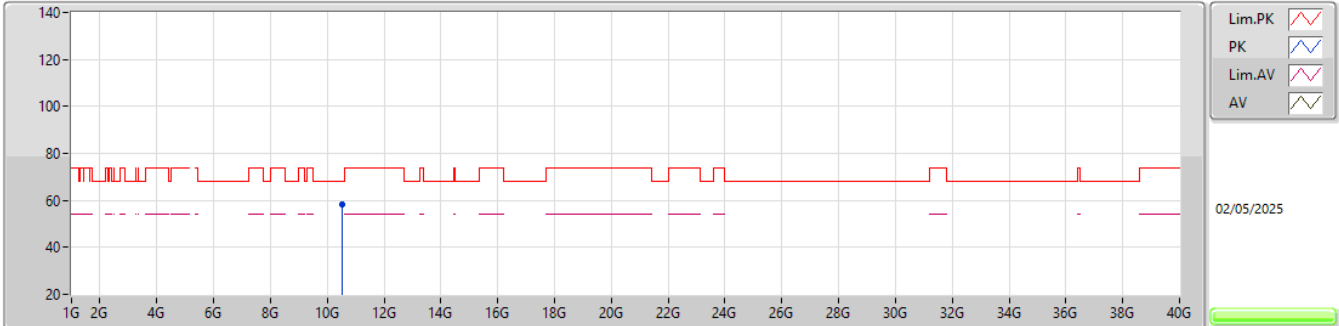


EUT_Y_2TX
Setting 12.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.54016G	58.52	68.20	-9.68	40.98	3	Horizontal	94	1.61	-	39.08	10.87	32.41				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5310MHz_TX

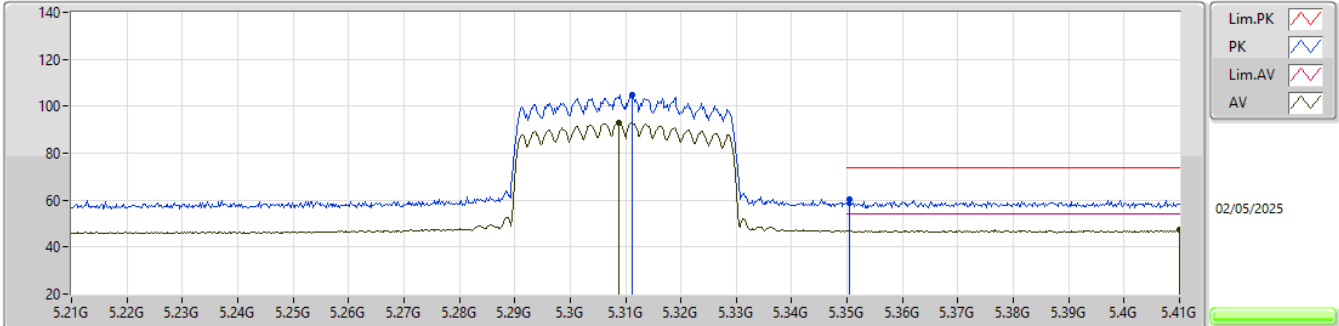


EUT_Y_2TX
Setting 13
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3112G	104.82	Inf	-Inf	97.62	3	Vertical	6	2.97	-	33.02	6.69	32.51				
AV	5.3088G	93.13	Inf	-Inf	85.94	3	Vertical	6	2.97	-	33.02	6.68	32.51				
PK	5.3504G	60.10	74.00	-13.90	52.79	3	Vertical	6	2.97	-	33.10	6.71	32.50				
AV	5.41G	47.32	54.00	-6.68	39.71	3	Vertical	6	2.97	-	33.34	6.75	32.48				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5310MHz_TX

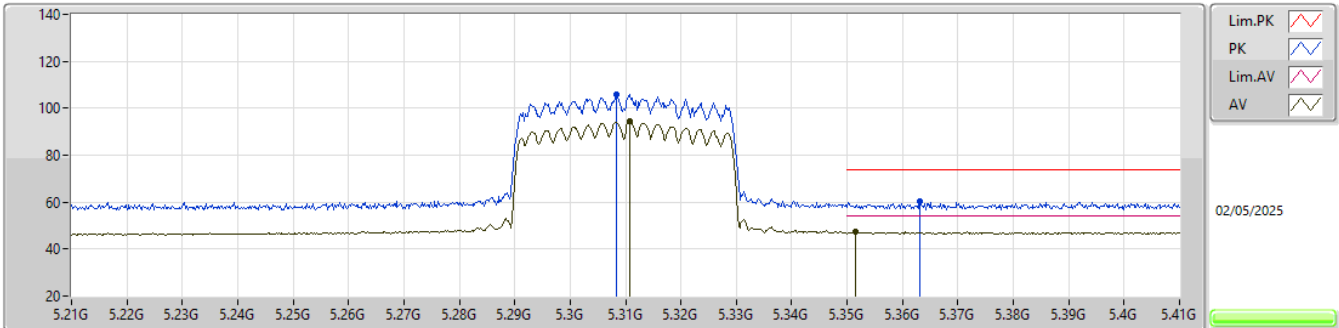


EUT_Y_2TX
Setting 13
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3084G	105.74	Inf	-Inf	98.55	3	Horizontal	9	1.80	-	33.02	6.68	32.51				
AV	5.3108G	94.30	Inf	-Inf	87.10	3	Horizontal	9	1.80	-	33.02	6.69	32.51				
PK	5.3632G	60.27	74.00	-13.73	52.90	3	Horizontal	9	1.80	-	33.15	6.71	32.49				
AV	5.3516G	47.38	54.00	-6.62	40.06	3	Horizontal	9	1.80	-	33.11	6.71	32.50				

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5310MHz_TX

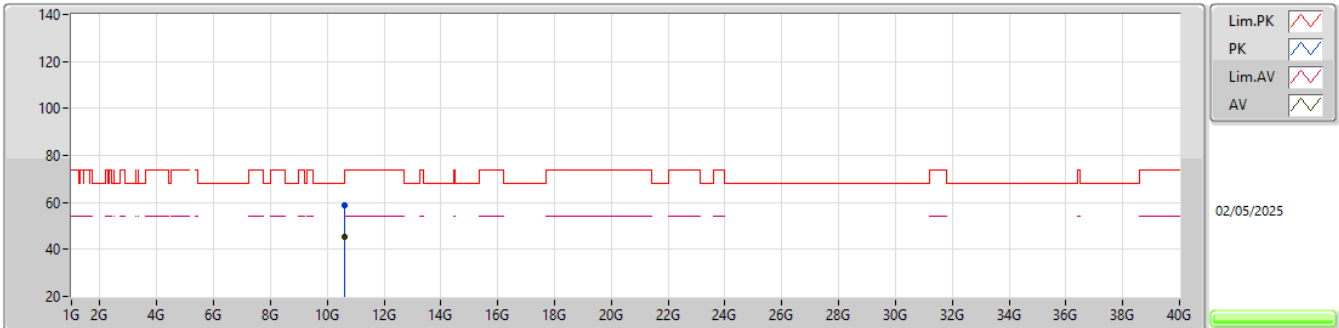EUT_Y_2TX
Setting 13
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.62095G	58.63	74.00	-15.37	40.95	3	Vertical	324	1.53	-	39.14	10.95	32.41			
AV	10.62078G	45.13	54.00	-8.87	27.45	3	Vertical	324	1.53	-	39.14	10.95	32.41			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5310MHz_TX

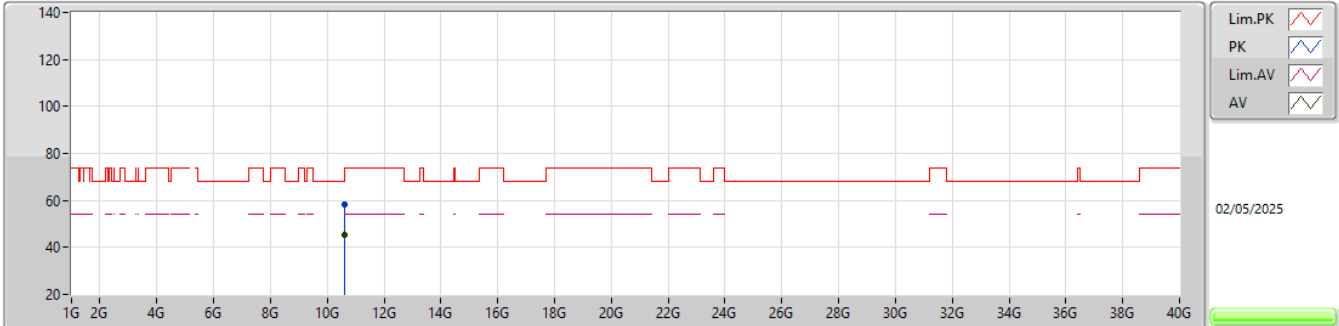


EUT_Y_2TX
Setting 13
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.61994G	58.45	74.00	-15.55	40.77	3	Horizontal	120	2.06	-	39.14	10.95	32.41			
AV	10.61931G	45.12	54.00	-8.88	27.44	3	Horizontal	120	2.06	-	39.14	10.95	32.41			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TX

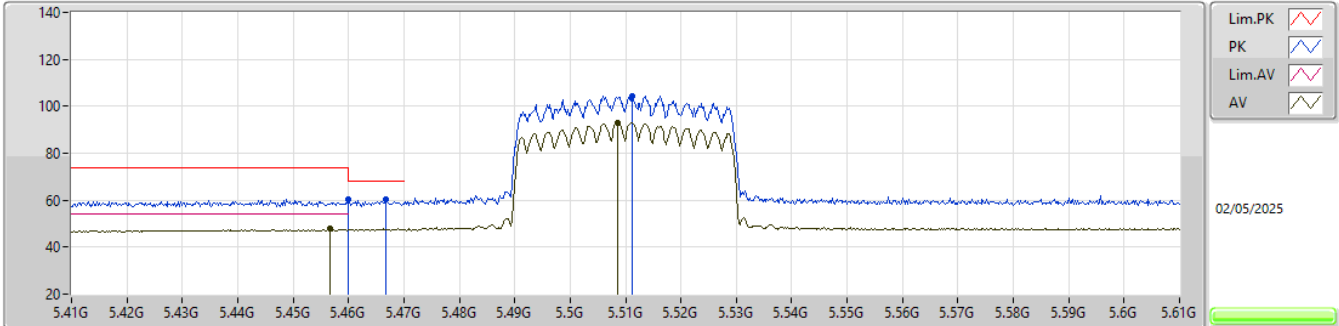


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.46G	60.20	74.00	-13.80	52.27	3	Vertical	33	1.80	-	33.56	6.84	32.47			
AV	5.4566G	47.70	54.00	-6.30	39.80	3	Vertical	33	1.80	-	33.54	6.83	32.47			
PK	5.4668G	60.23	68.20	-7.97	52.25	3	Vertical	33	1.80	-	33.60	6.85	32.47			
PK	5.5112G	104.44	Inf	-Inf	96.14	3	Vertical	33	1.80	-	33.82	6.94	32.46			
AV	5.5086G	93.16	Inf	-Inf	84.87	3	Vertical	33	1.80	-	33.82	6.93	32.46			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TX

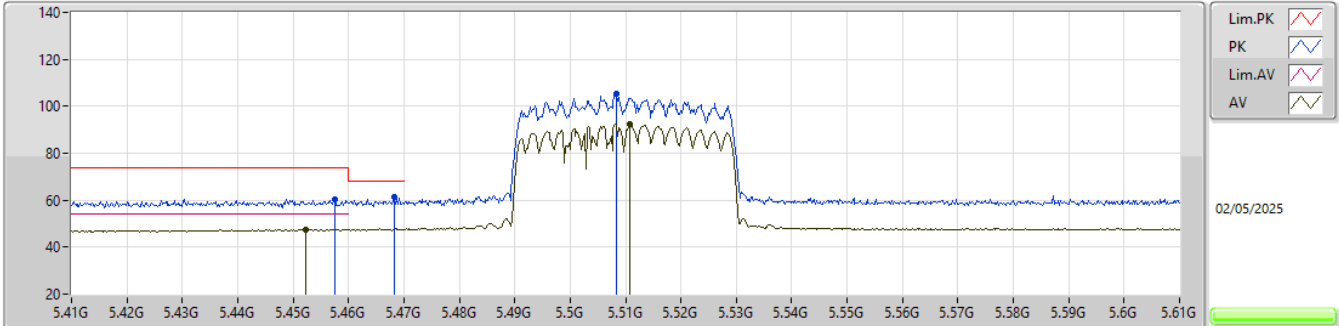


EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4576G	60.41	74.00	-13.59	52.49	3	Horizontal	330	1.80	-	33.55	6.84	32.47			
AV	5.4522G	47.55	54.00	-6.45	39.68	3	Horizontal	330	1.80	-	33.51	6.83	32.47			
PK	5.4682G	61.16	68.20	-7.04	53.16	3	Horizontal	330	1.80	-	33.61	6.86	32.47			
PK	5.5084G	105.42	Inf	-Inf	97.13	3	Horizontal	330	1.80	-	33.82	6.93	32.46			
AV	5.5108G	92.65	Inf	-Inf	84.36	3	Horizontal	330	1.80	-	33.82	6.93	32.46			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TX

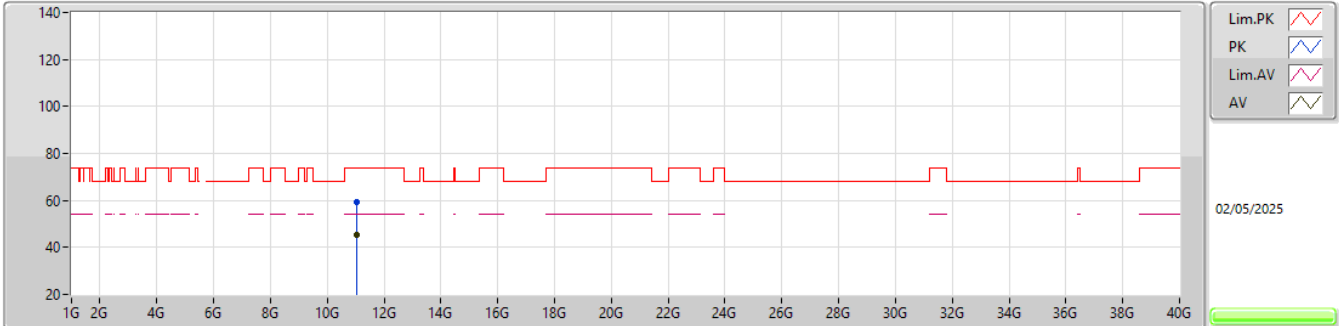


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.01994G	59.34	74.00	-14.66	41.36	3	Vertical	226	1.53	-	39.06	11.36	32.44			
AV	11.02053G	45.32	54.00	-8.68	27.34	3	Vertical	226	1.53	-	39.06	11.36	32.44			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TX

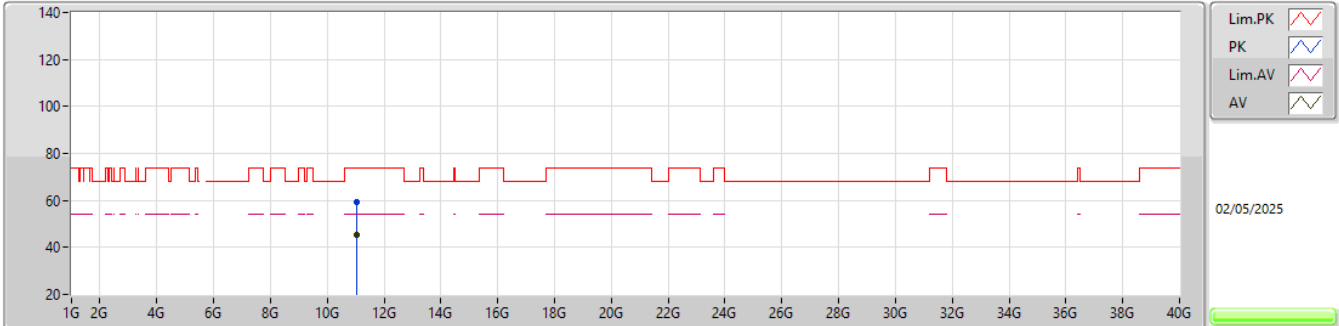


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.02053G	59.27	74.00	-14.73	41.29	3	Horizontal	323	1.92	-	39.06	11.36	32.44			
AV	11.02087G	45.42	54.00	-8.58	27.44	3	Horizontal	323	1.92	-	39.06	11.36	32.44			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TX

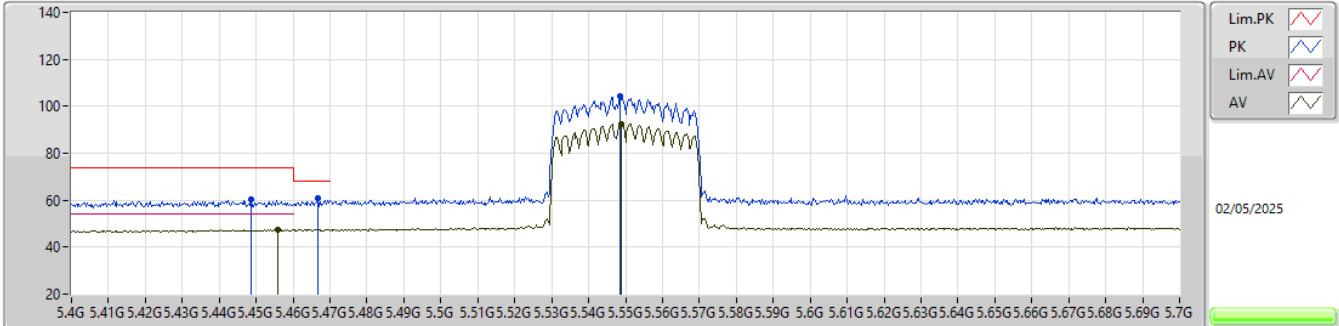


EUT_Y_2TX
Setting 12.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4486G	60.35	74.00	-13.65	52.51	3	Vertical	32	1.80	-	33.49	6.82	32.47			
AV	5.4558G	47.34	54.00	-6.66	39.45	3	Vertical	32	1.80	-	33.53	6.83	32.47			
PK	5.4666G	60.95	68.20	-7.25	52.97	3	Vertical	32	1.80	-	33.60	6.85	32.47			
PK	5.5485G	104.20	Inf	-Inf	95.76	3	Vertical	32	1.80	-	33.90	7.00	32.46			
AV	5.5488G	92.66	Inf	-Inf	84.21	3	Vertical	32	1.80	-	33.90	7.01	32.46			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TX

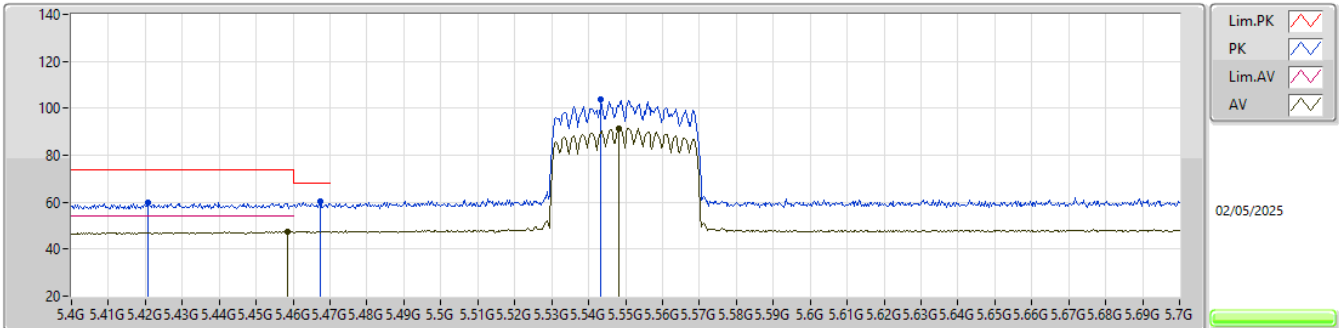


EUT_Y_2TX
Setting 12.5
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4207G	59.71	74.00	-14.29	52.04	3	Horizontal	331	1.80	-	33.38	6.77	32.48			
PK	5.4675G	60.12	68.20	-8.08	52.14	3	Horizontal	331	1.80	-	33.60	6.85	32.47			
AV	5.4585G	47.51	54.00	-6.49	39.59	3	Horizontal	331	1.80	-	33.55	6.84	32.47			
PK	5.5434G	103.57	Inf	-Inf	95.14	3	Horizontal	331	1.80	-	33.89	7.00	32.46			
AV	5.5482G	91.56	Inf	-Inf	83.12	3	Horizontal	331	1.80	-	33.90	7.00	32.46			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TX

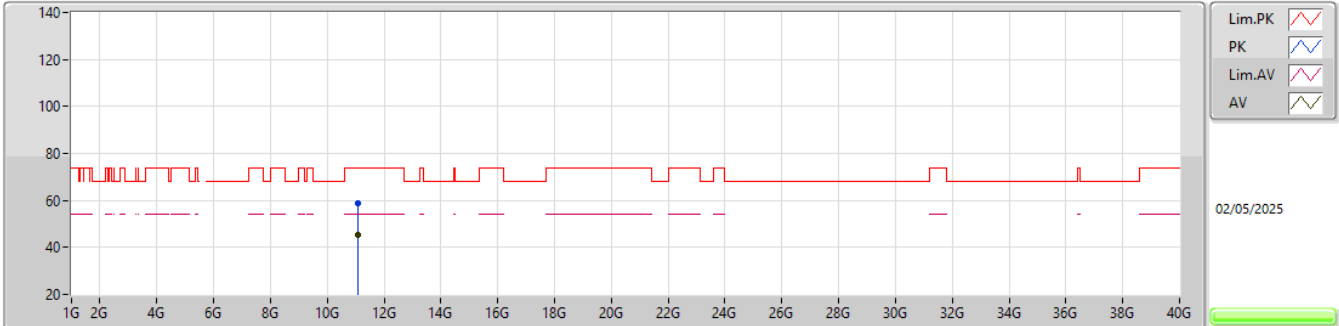


EUT_Y_2TX
Setting 12.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.10064G	58.59	74.00	-15.41	40.61	3	Vertical	341	1.32	-	39.00	11.44	32.46			
AV	11.09949G	45.46	54.00	-8.54	27.48	3	Vertical	341	1.32	-	39.00	11.44	32.46			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TX

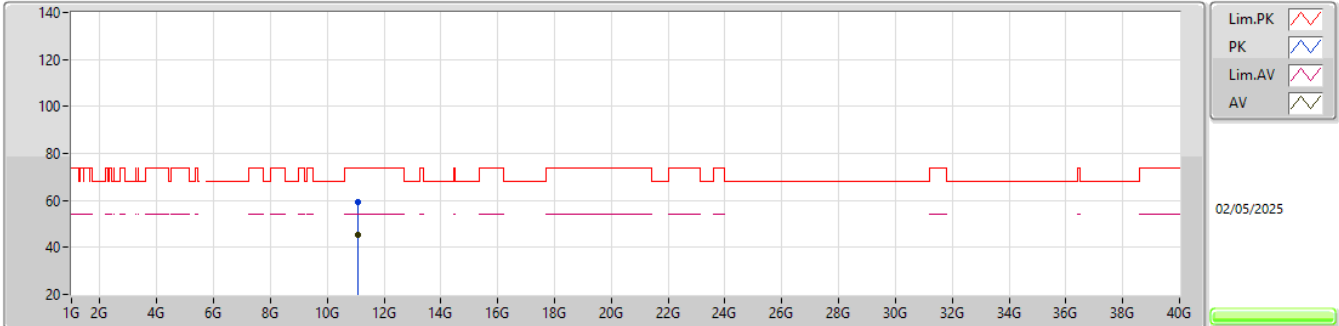


EUT_Y_2TX
Setting 12.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.09916G	59.17	74.00	-14.83	41.19	3	Horizontal	19	2.20	-	39.00	11.44	32.46			
AV	11.10022G	45.29	54.00	-8.71	27.31	3	Horizontal	19	2.20	-	39.00	11.44	32.46			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TX

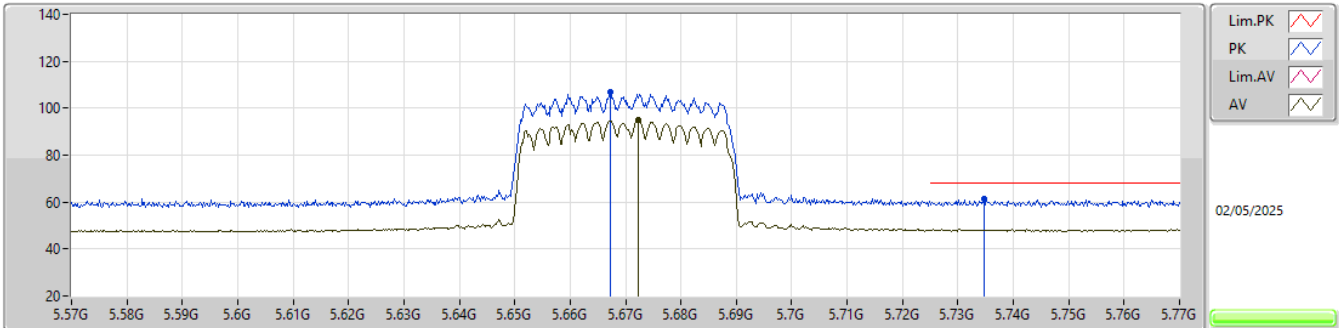


EUT Y_2TX
Setting 14
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6672G	106.69	Inf	-Inf	97.93	3	Vertical	26	3.00	-	34.03	7.18	32.45				
AV	5.6722G	94.97	Inf	-Inf	86.19	3	Vertical	26	3.00	-	34.04	7.19	32.45				
PK	5.7348G	61.17	68.20	-7.03	52.25	3	Vertical	26	3.00	-	34.10	7.27	32.45				

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5670MHz_TX

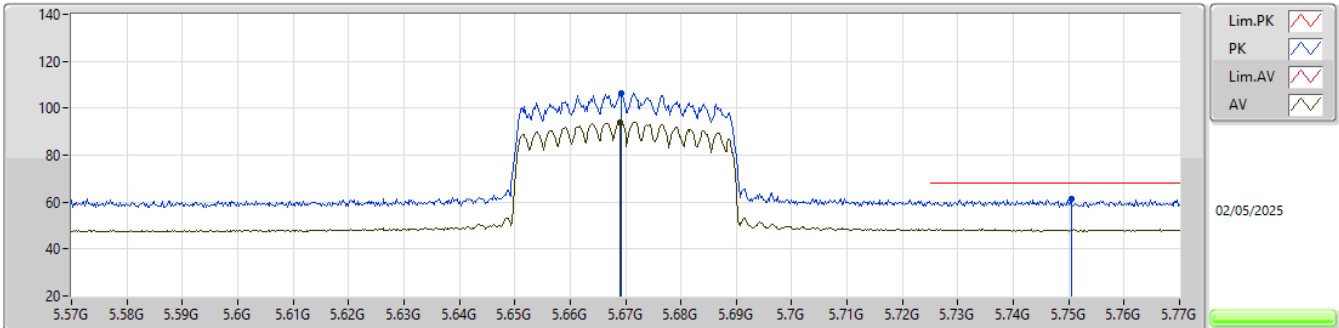EUT_Y_2TX
Setting 14
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6692G	106.54	Inf	-Inf	97.76	3	Horizontal	326	1.80	-	34.04	7.19	32.45			
AV	5.669G	94.06	Inf	-Inf	85.28	3	Horizontal	326	1.80	-	34.04	7.19	32.45			
PK	5.7504G	61.25	68.20	-6.95	52.31	3	Horizontal	326	1.80	-	34.10	7.29	32.45			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TX

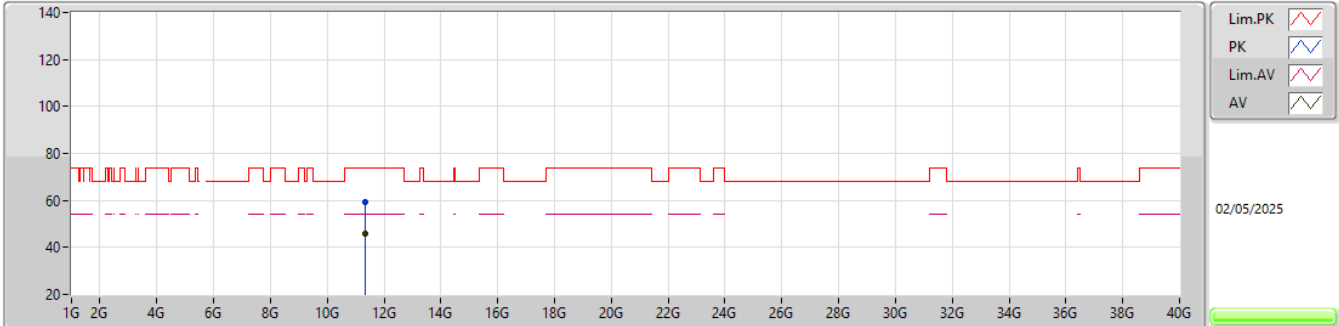


EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.33936G	59.30	74.00	-14.70	41.06	3	Vertical	168	1.52	-	39.08	11.69	32.53			
AV	11.34051G	45.69	54.00	-8.31	27.45	3	Vertical	168	1.52	-	39.08	11.69	32.53			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5670MHz_TX

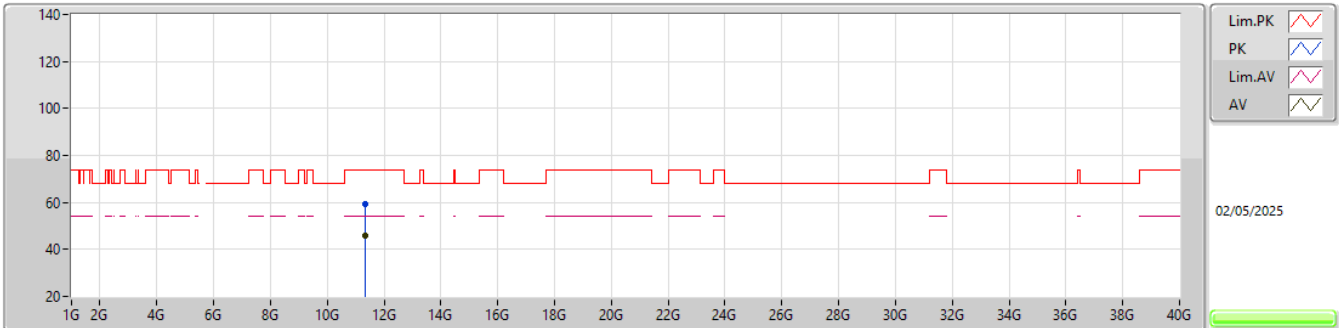EUT_Y_2TX
Setting 14
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.33994G	59.35	74.00	-14.65	41.11	3	Horizontal	236	2.81	-	39.08	11.69	32.53			
AV	11.33981G	45.83	54.00	-8.17	27.59	3	Horizontal	236	2.81	-	39.08	11.69	32.53			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

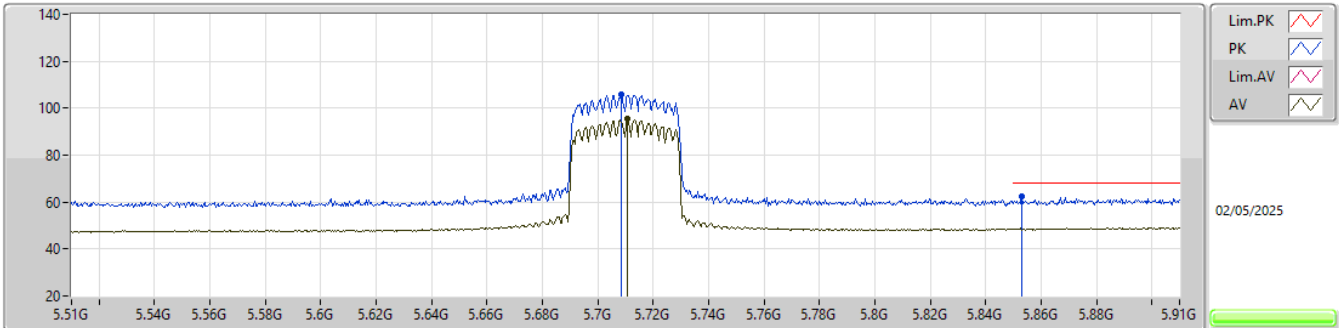


EUT_Y_2TX
Setting 14.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7084G	106.05	Inf	-Inf	97.16	3	Vertical	50	1.80	-	34.10	7.24	32.45			
AV	5.7108G	95.31	Inf	-Inf	86.42	3	Vertical	50	1.80	-	34.10	7.24	32.45			
PK	5.8532G	62.18	68.20	-6.02	52.72	3	Vertical	50	1.80	-	34.52	7.39	32.45			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

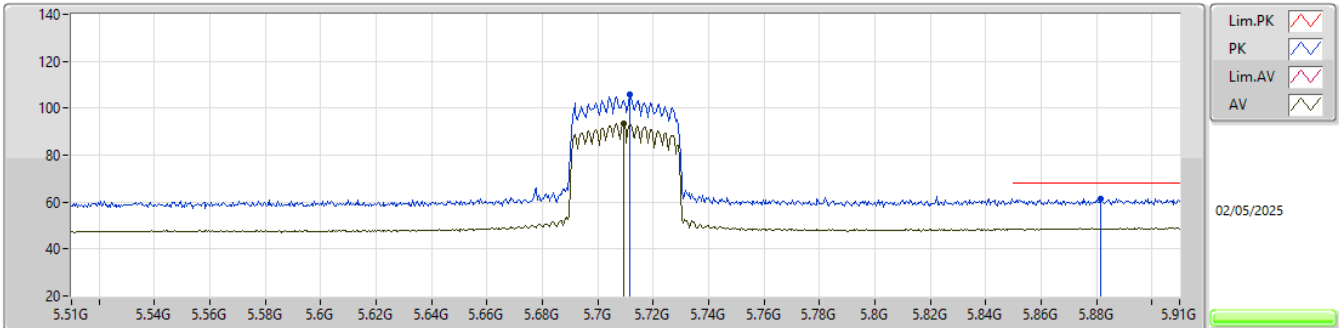EUT_Y_2TX
Setting 14.5
01-U-M-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7116G	105.62	Inf	-Inf	96.73	3	Horizontal	328	1.80	-	34.10	7.24	32.45			
AV	5.7092G	93.56	Inf	-Inf	84.67	3	Horizontal	328	1.80	-	34.10	7.24	32.45			
PK	5.8816G	61.38	68.20	-6.82	51.72	3	Horizontal	328	1.80	-	34.69	7.41	32.44			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

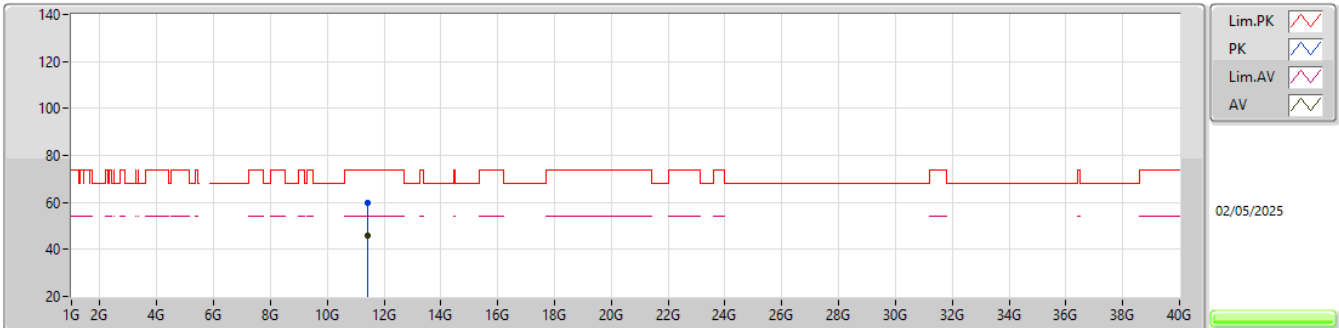


EUT_Y_2TX
Setting 14.5
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4191G	59.92	74.00	-14.08	41.65	3	Vertical	147	1.86	-	39.06	11.77	32.56			
AV	11.41987G	46.02	54.00	-7.98	27.75	3	Vertical	147	1.86	-	39.06	11.77	32.56			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

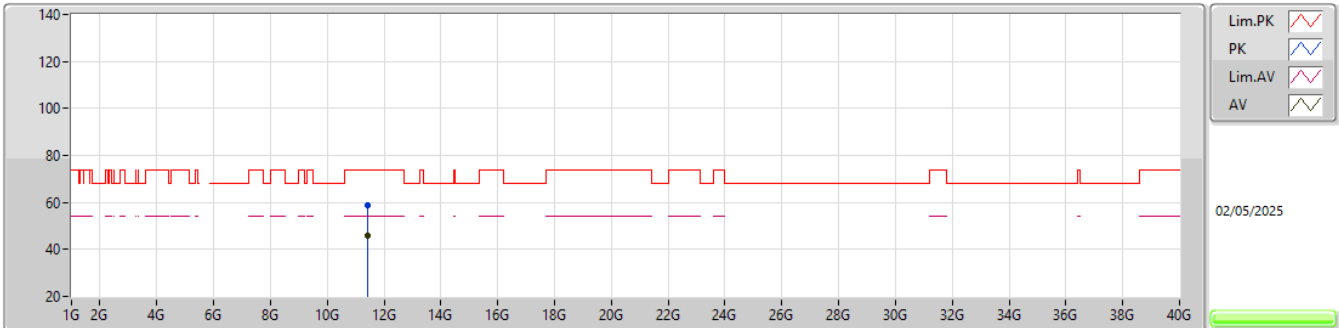


EUT_Y_2TX
Setting 14.5
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.41903G	58.89	74.00	-15.11	40.62	3	Horizontal	226	1.10	-	39.06	11.77	32.56			
AV	11.42085G	45.85	54.00	-8.15	27.58	3	Horizontal	226	1.10	-	39.06	11.77	32.56			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TX

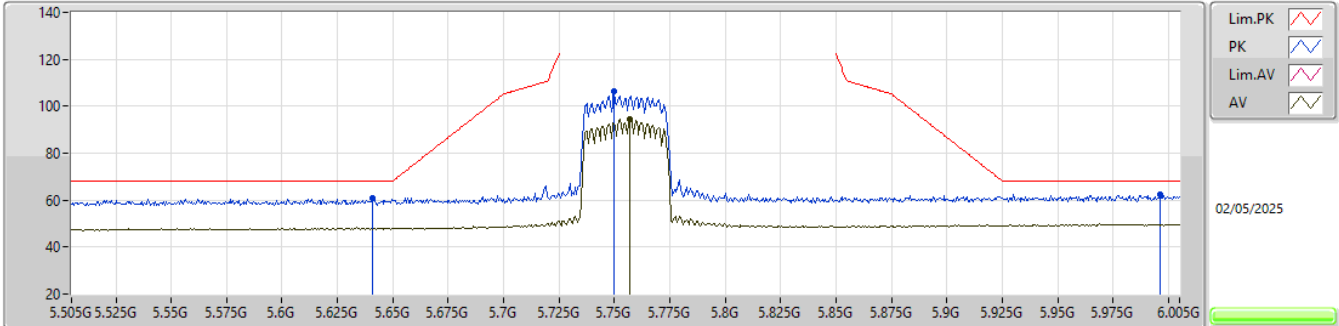


EUT_Y_2TX
Setting 14
01-U-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.641G	60.88	68.20	-7.32	52.20	3	Vertical	28	1.80	-	33.98	7.15	32.45				
PK	5.75G	106.36	Inf	-Inf	97.42	3	Vertical	28	1.80	-	34.10	7.29	32.45				
AV	5.757G	94.45	Inf	-Inf	85.49	3	Vertical	28	1.80	-	34.11	7.30	32.45				
PK	5.9965G	62.67	68.20	-5.53	52.32	3	Vertical	28	1.80	-	35.29	7.50	32.44				

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TX

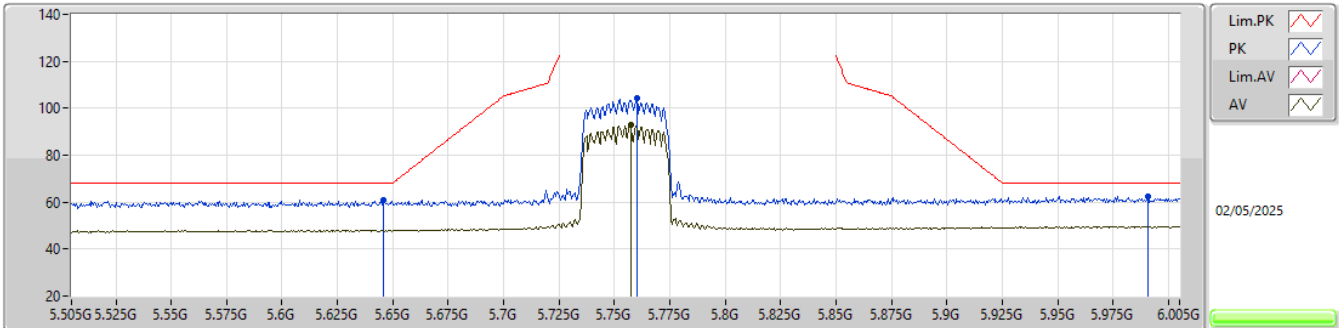


EUT_Y_2TX
Setting 14
01-U-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6455G	61.01	68.20	-7.19	52.31	3	Horizontal	325	1.80	-	33.99	7.16	32.45			
PK	5.76G	104.38	Inf	-Inf	95.41	3	Horizontal	325	1.80	-	34.12	7.30	32.45			
AV	5.7575G	92.70	Inf	-Inf	83.73	3	Horizontal	325	1.80	-	34.12	7.30	32.45			
PK	5.991G	62.32	68.20	-5.88	52.01	3	Horizontal	325	1.80	-	35.26	7.49	32.44			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TX

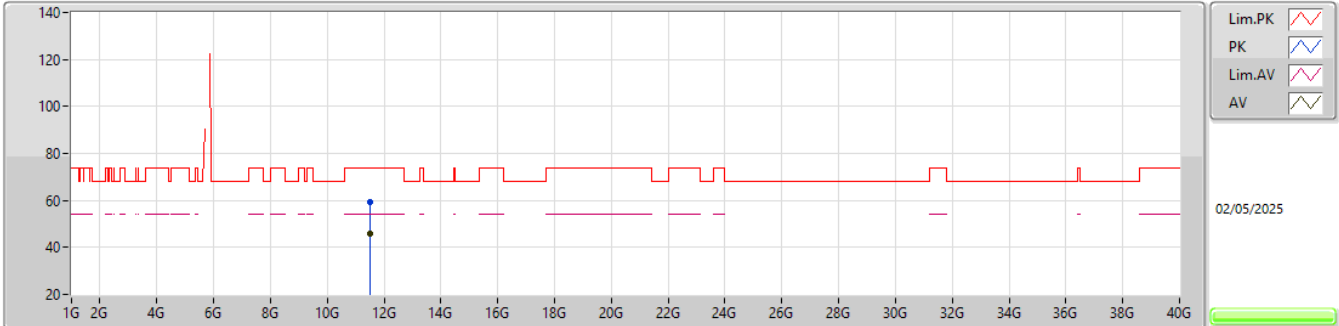


EUT_Y_2TX
Setting 14
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.50956G	59.49	74.00	-14.51	41.29	3	Vertical	238	2.99	-	38.92	11.86	32.58			
AV	11.51042G	46.00	54.00	-8.00	27.80	3	Vertical	238	2.99	-	38.92	11.86	32.58			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TX

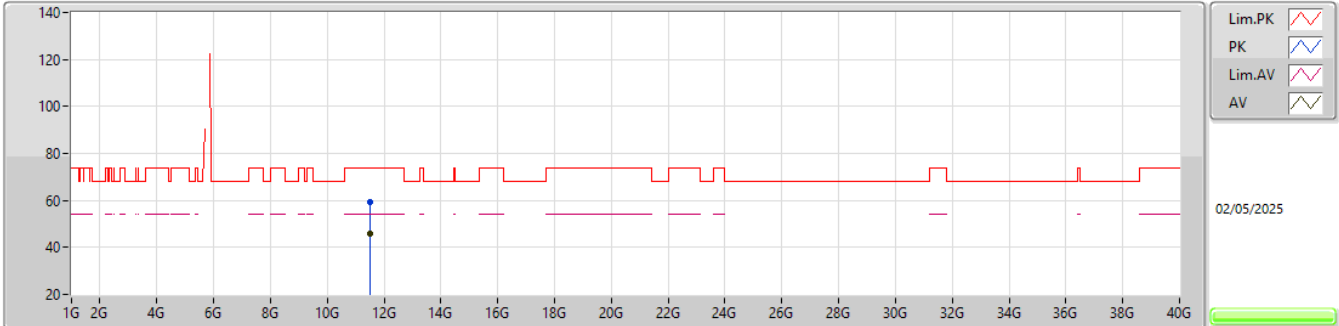


EUT_Y_2TX
Setting 14
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.50969G	59.37	74.00	-14.63	41.17	3	Horizontal	344	2.30	-	38.92	11.86	32.58			
AV	11.50953G	46.07	54.00	-7.93	27.87	3	Horizontal	344	2.30	-	38.92	11.86	32.58			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TX

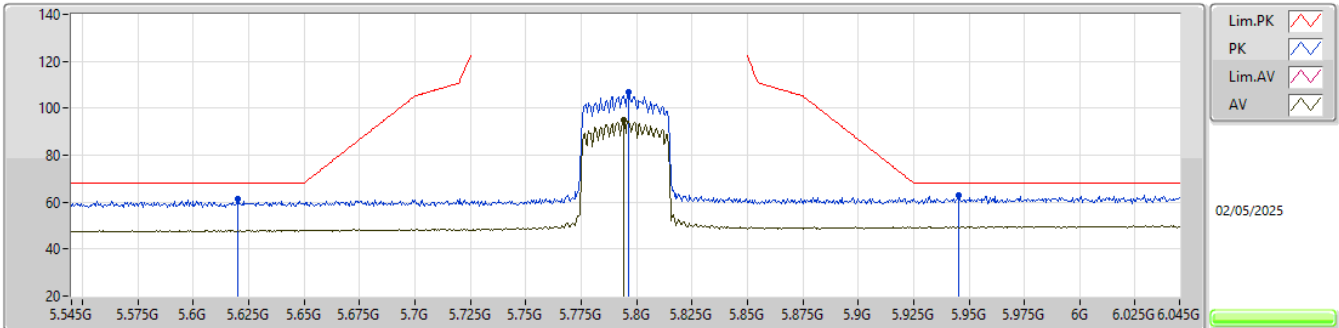


EUT_Y_2TX
Setting 13.5
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.62G	61.42	68.20	-6.78	52.82	3	Vertical	25	1.80	-	33.94	7.12	32.46			
PK	5.7965G	106.75	Inf	-Inf	97.66	3	Vertical	25	1.80	-	34.19	7.35	32.45			
AV	5.794G	94.80	Inf	-Inf	85.72	3	Vertical	25	1.80	-	34.19	7.34	32.45			
PK	5.9455G	62.95	68.20	-5.25	52.86	3	Vertical	25	1.80	-	35.07	7.46	32.44			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TX

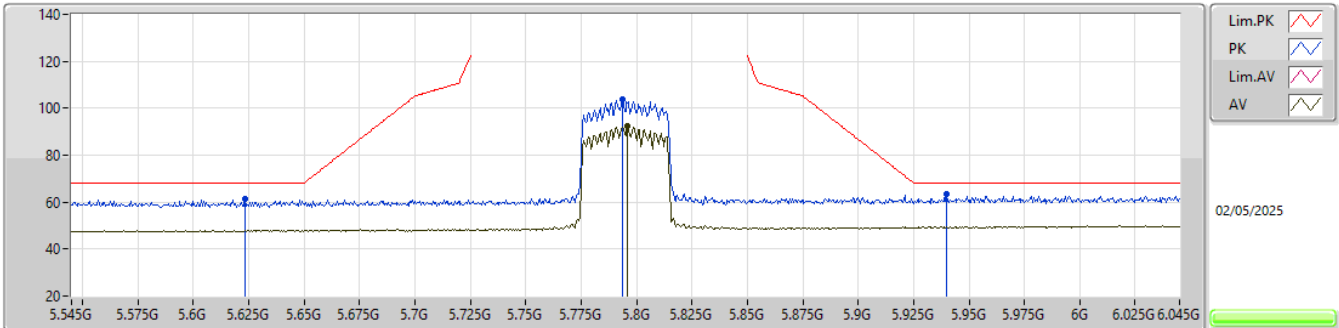


EUT_Y_2TX
Setting 13.5
01-U-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6235G	61.17	68.20	-7.03	52.55	3	Horizontal	31	1.80	-	33.95	7.13	32.46			
PK	5.7935G	103.97	Inf	-Inf	94.89	3	Horizontal	31	1.80	-	34.19	7.34	32.45			
AV	5.796G	92.60	Inf	-Inf	83.52	3	Horizontal	31	1.80	-	34.19	7.34	32.45			
PK	5.94G	63.43	68.20	-4.77	53.37	3	Horizontal	31	1.80	-	35.04	7.46	32.44			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5795MHz_TX

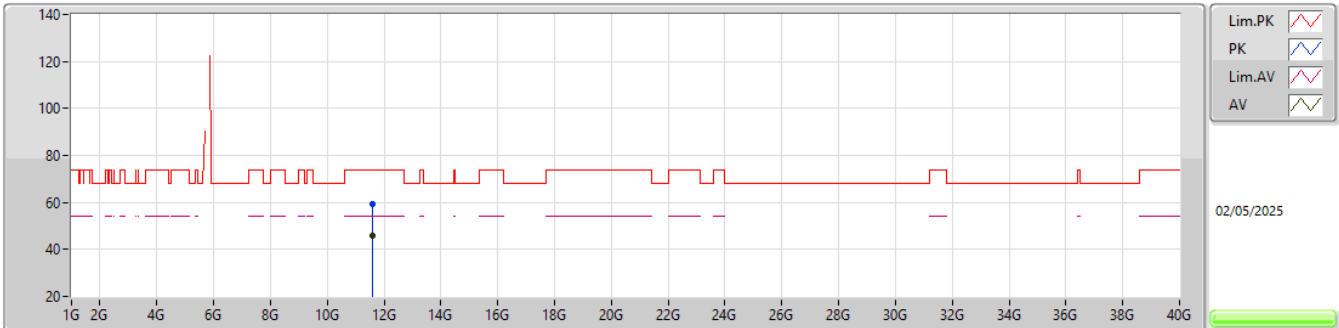EUT Y_2TX
Setting 13.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.58906G	59.48	74.00	-14.52	41.24	3	Vertical	96	2.07	-	38.92	11.94	32.62			
AV	11.59016G	46.01	54.00	-7.99	27.77	3	Vertical	96	2.07	-	38.92	11.94	32.62			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TX

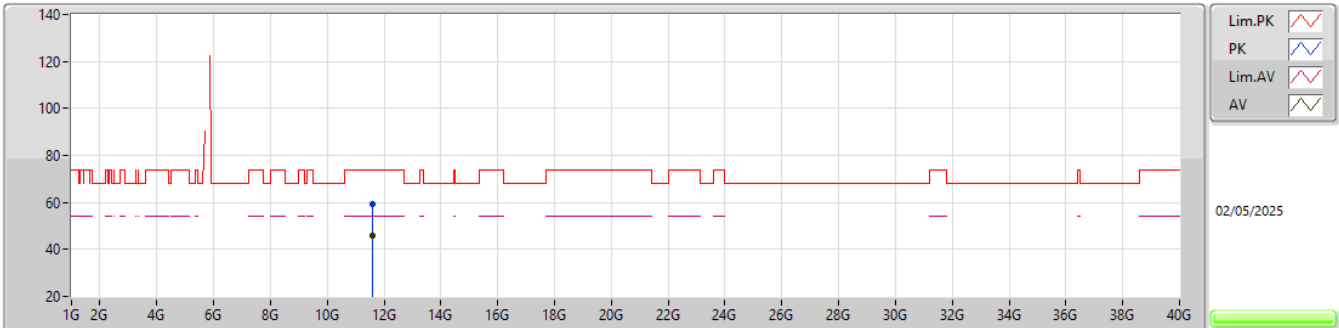


EUT Y_2TX
Setting 13.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.59013G	59.26	74.00	-14.74	41.02	3	Horizontal	268	1.87	-	38.92	11.94	32.62			
AV	11.59007G	46.09	54.00	-7.91	27.85	3	Horizontal	268	1.87	-	38.92	11.94	32.62			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

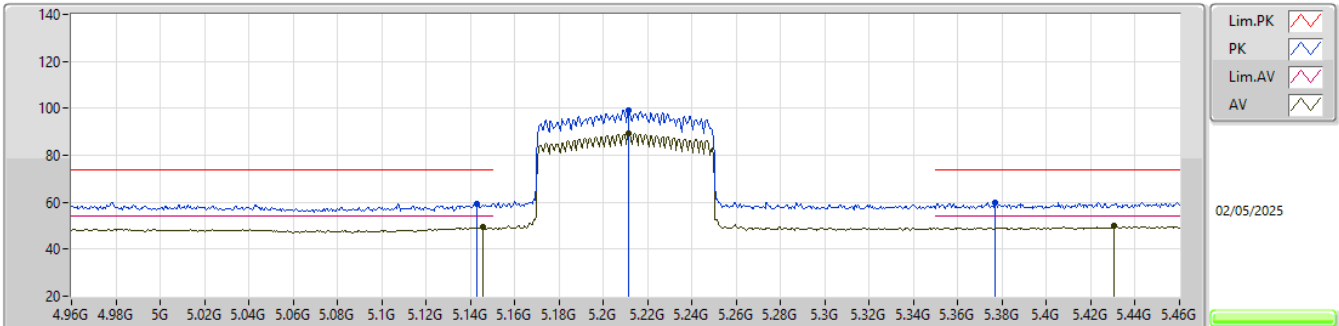


EUT Y_2TX
Setting 12.5
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.143G	59.35	74.00	-14.65	52.47	3	Vertical	12	1.80	-	32.79	6.64	32.55			
AV	5.1455G	49.35	54.00	-4.65	42.47	3	Vertical	12	1.80	-	32.79	6.64	32.55			
PK	5.2115G	99.02	Inf	-Inf	92.01	3	Vertical	12	1.80	-	32.90	6.64	32.53			
AV	5.2115G	89.33	Inf	-Inf	82.32	3	Vertical	12	1.80	-	32.90	6.64	32.53			
PK	5.377G	60.04	74.00	-13.96	52.60	3	Vertical	12	1.80	-	33.21	6.72	32.49			
AV	5.4305G	49.81	54.00	-4.19	42.08	3	Vertical	12	1.80	-	33.42	6.79	32.48			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

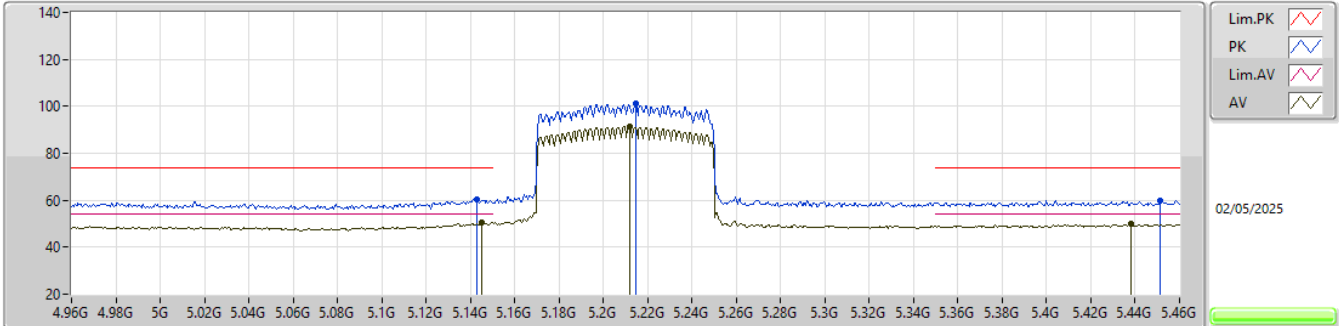


EUT_Y_2TX
Setting 12.5
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.143G	60.42	74.00	-13.58	53.54	3	Horizontal	10	1.80	-	32.79	6.64	32.55			
AV	5.145G	50.47	54.00	-3.53	43.59	3	Horizontal	10	1.80	-	32.79	6.64	32.55			
PK	5.2145G	101.31	Inf	-Inf	94.30	3	Horizontal	10	1.80	-	32.90	6.64	32.53			
AV	5.212G	91.62	Inf	-Inf	84.61	3	Horizontal	10	1.80	-	32.90	6.64	32.53			
PK	5.4515G	59.83	74.00	-14.17	51.96	3	Horizontal	10	1.80	-	33.51	6.83	32.47			
AV	5.438G	49.79	54.00	-4.21	42.01	3	Horizontal	10	1.80	-	33.45	6.80	32.47			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

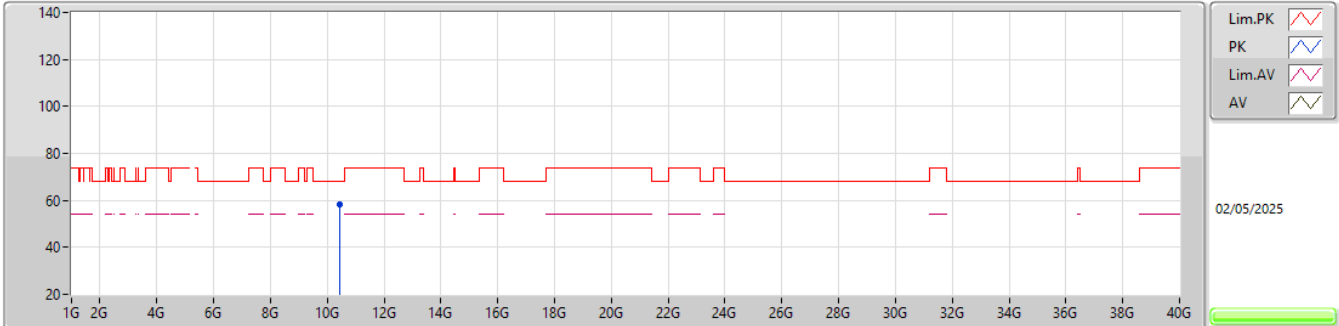


EUT_Y_2TX
Setting 12.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.42094G	58.16	68.20	-10.04	41.15	3	Vertical	229	1.83	-	38.74	10.75	32.48				

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

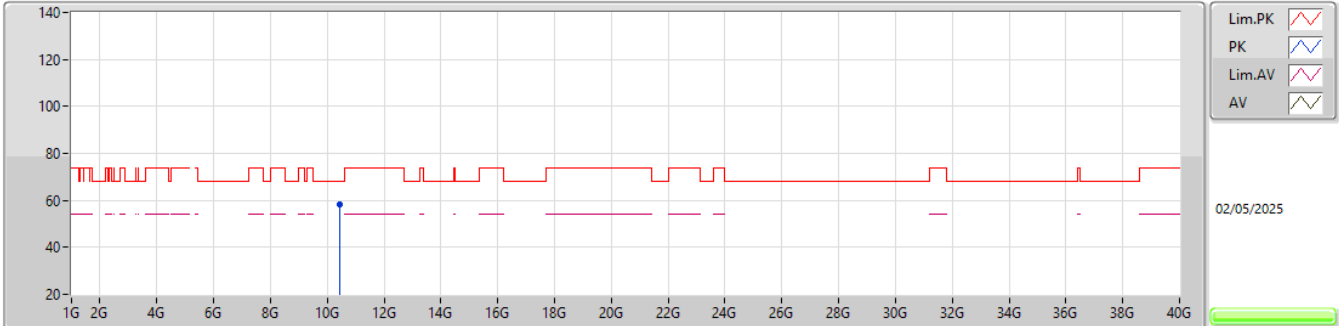


EUT_Y_2TX
Setting 12.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.42038G	58.18	68.20	-10.02	41.17	3	Horizontal	127	2.57	-	38.74	10.75	32.48				

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

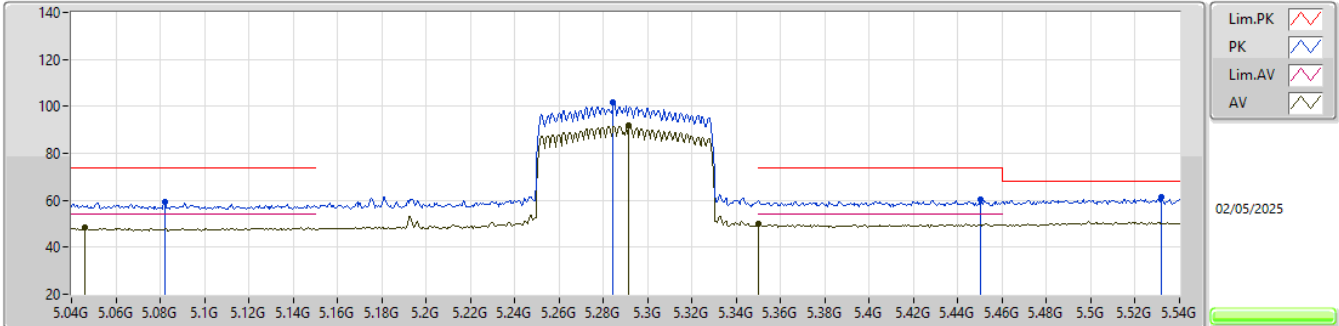


EUT_Y_2TX
Setting 12.5
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.082G	59.31	74.00	-14.69	52.48	3	Vertical	5	3.00	-	32.74	6.65	32.56			
AV	5.046G	48.29	54.00	-5.71	41.39	3	Vertical	5	3.00	-	32.81	6.66	32.57			
PK	5.2845G	101.75	Inf	-Inf	94.62	3	Vertical	5	3.00	-	32.97	6.67	32.51			
AV	5.2915G	92.13	Inf	-Inf	84.98	3	Vertical	5	3.00	-	32.98	6.68	32.51			
AV	5.35G	50.00	54.00	-4.00	42.69	3	Vertical	5	3.00	-	33.10	6.71	32.50			
PK	5.45G	60.10	74.00	-13.90	52.25	3	Vertical	5	3.00	-	33.50	6.82	32.47			
PK	5.532G	61.36	68.20	-6.84	52.99	3	Vertical	5	3.00	-	33.86	6.97	32.46			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

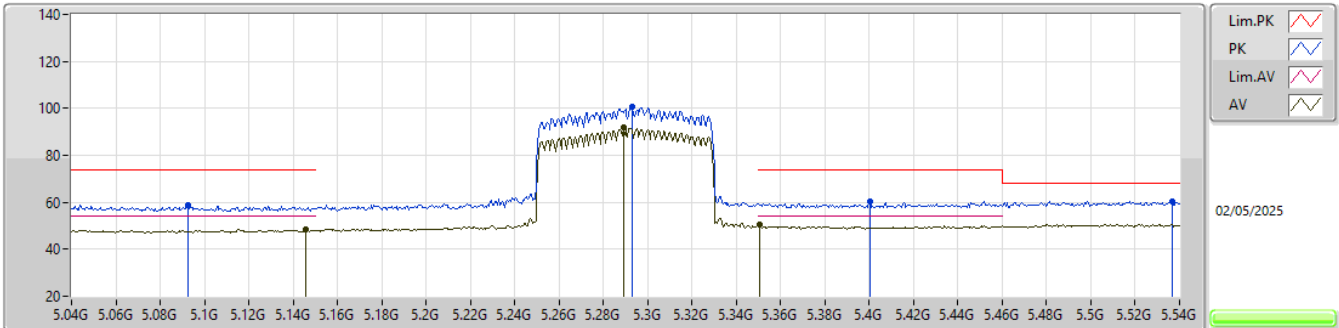


EUT_Y_2TX
Setting 12.5
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.0925G	58.70	74.00	-15.30	51.89	3	Horizontal	23	1.80	-	32.72	6.65	32.56
AV	5.1455G	48.30	54.00	-5.70	41.42	3	Horizontal	23	1.80	-	32.79	6.64	32.55
PK	5.293G	100.63	Inf	-Inf	93.47	3	Horizontal	23	1.80	-	32.99	6.68	32.51
AV	5.289G	91.80	Inf	-Inf	84.66	3	Horizontal	23	1.80	-	32.98	6.67	32.51
PK	5.4005G	60.33	74.00	-13.67	52.78	3	Horizontal	23	1.80	-	33.30	6.73	32.48
AV	5.3505G	50.31	54.00	-3.69	43.00	3	Horizontal	23	1.80	-	33.10	6.71	32.50
PK	5.5365G	60.54	68.20	-7.66	52.15	3	Horizontal	23	1.80	-	33.87	6.98	32.46

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

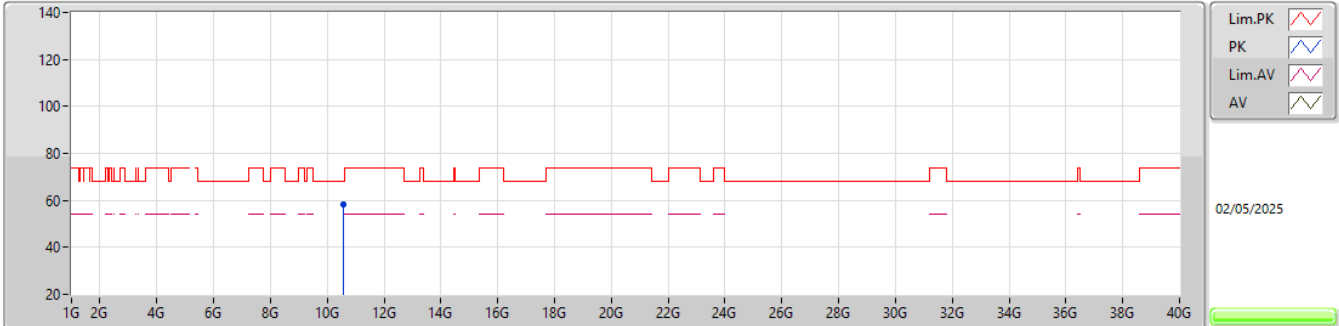


EUT_Y_2TX
Setting 12.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.58041G	58.15	68.20	-10.05	40.55	3	Vertical	166	2.88	-	39.10	10.91	32.41				

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

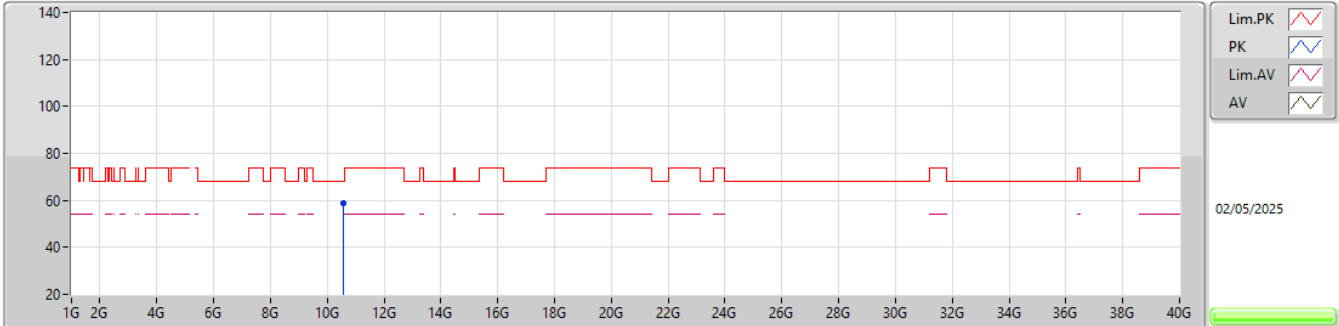


EUT_Y_2TX
Setting 12.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.58009G	58.82	68.20	-9.38	41.22	3	Horizontal	232	1.81	-	39.10	10.91	32.41				

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

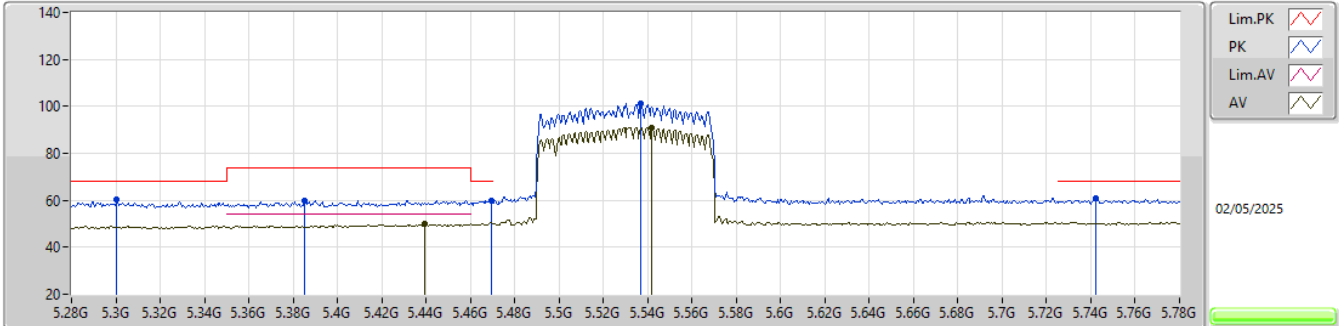


EUT_Y_2TX
Setting 13.5
01-U-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3005G	60.16	68.20	-8.04	52.99	3	Vertical	37	1.80	-	33.00	6.68	32.51			
PK	5.385G	59.84	74.00	-14.16	52.37	3	Vertical	37	1.80	-	33.24	6.72	32.49			
PK	5.4695G	59.93	68.20	-8.27	51.92	3	Vertical	37	1.80	-	33.62	6.86	32.47			
AV	5.4395G	50.10	54.00	-3.90	42.31	3	Vertical	37	1.80	-	33.46	6.80	32.47			
PK	5.537G	101.35	Inf	-Inf	92.96	3	Vertical	37	1.80	-	33.87	6.98	32.46			
AV	5.542G	91.12	Inf	-Inf	82.71	3	Vertical	37	1.80	-	33.88	6.99	32.46			
PK	5.742G	60.92	68.20	-7.28	51.99	3	Vertical	37	1.80	-	34.10	7.28	32.45			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

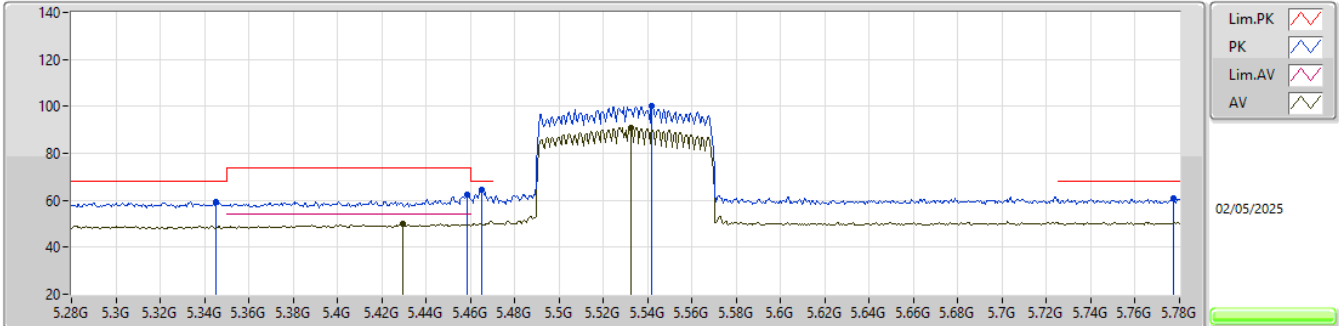


EUT_Y_2TX
Setting 13.5
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.345G	59.27	68.20	-8.93	51.98	3	Horizontal	330	1.80	-	33.09	6.70	32.50			
PK	5.4585G	62.42	74.00	-11.58	54.50	3	Horizontal	330	1.80	-	33.55	6.84	32.47			
AV	5.4295G	49.82	54.00	-4.18	42.10	3	Horizontal	330	1.80	-	33.42	6.78	32.48			
PK	5.465G	64.70	68.20	-3.50	56.73	3	Horizontal	330	1.80	-	33.59	6.85	32.47			
PK	5.542G	100.41	Inf	-Inf	92.00	3	Horizontal	330	1.80	-	33.88	6.99	32.46			
AV	5.5325G	91.06	Inf	-Inf	82.67	3	Horizontal	330	1.80	-	33.87	6.98	32.46			
PK	5.777G	60.65	68.20	-7.55	51.63	3	Horizontal	330	1.80	-	34.15	7.32	32.45			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

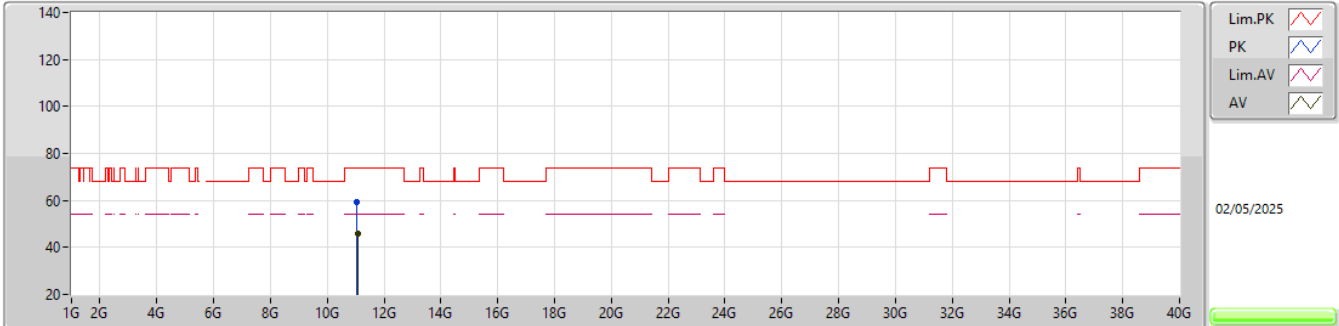


EUT_Y_2TX
Setting 13.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.05914G	59.50	74.00	-14.50	41.55	3	Vertical	243	1.06	-	39.00	11.40	32.45			
AV	11.0609G	45.83	54.00	-8.17	27.88	3	Vertical	243	1.06	-	39.00	11.40	32.45			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

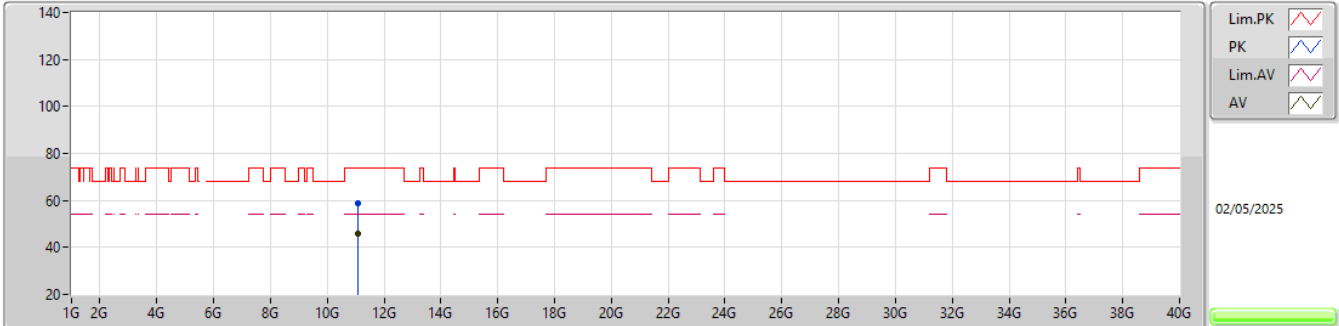


EUT_Y_2TX
Setting 13.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0601G	58.79	74.00	-15.21	40.84	3	Horizontal	341	2.99	-	39.00	11.40	32.45			
AV	11.06045G	45.71	54.00	-8.29	27.76	3	Horizontal	341	2.99	-	39.00	11.40	32.45			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5610MHz_TX

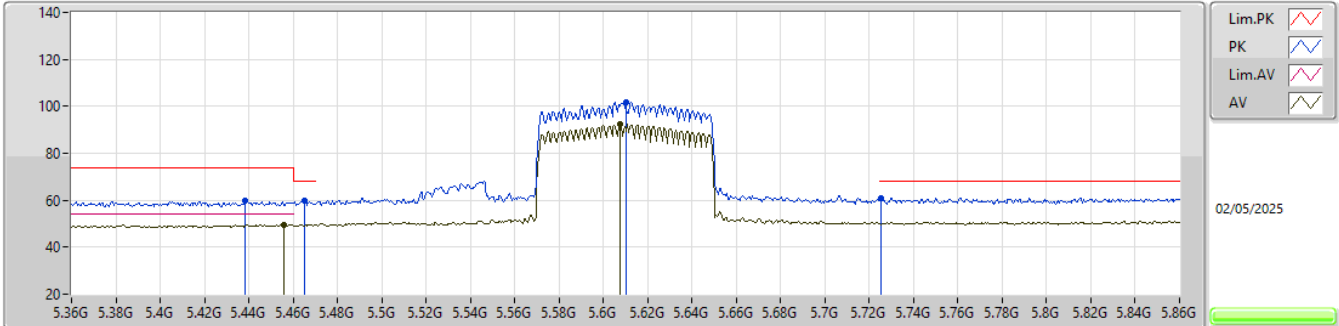EUT_Y_2TX
Setting 13
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4385G	59.63	74.00	-14.37	51.85	3	Vertical	31	1.80	-	33.45	6.80	32.47			
PK	5.465G	59.82	68.20	-8.38	51.85	3	Vertical	31	1.80	-	33.59	6.85	32.47			
AV	5.456G	49.66	54.00	-4.34	41.76	3	Vertical	31	1.80	-	33.54	6.83	32.47			
PK	5.61G	101.88	Inf	-Inf	93.31	3	Vertical	31	1.80	-	33.92	7.11	32.46			
AV	5.6075G	92.18	Inf	-Inf	83.62	3	Vertical	31	1.80	-	33.91	7.11	32.46			
PK	5.7255G	60.98	68.20	-7.22	52.07	3	Vertical	31	1.80	-	34.10	7.26	32.45			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5610MHz_TX

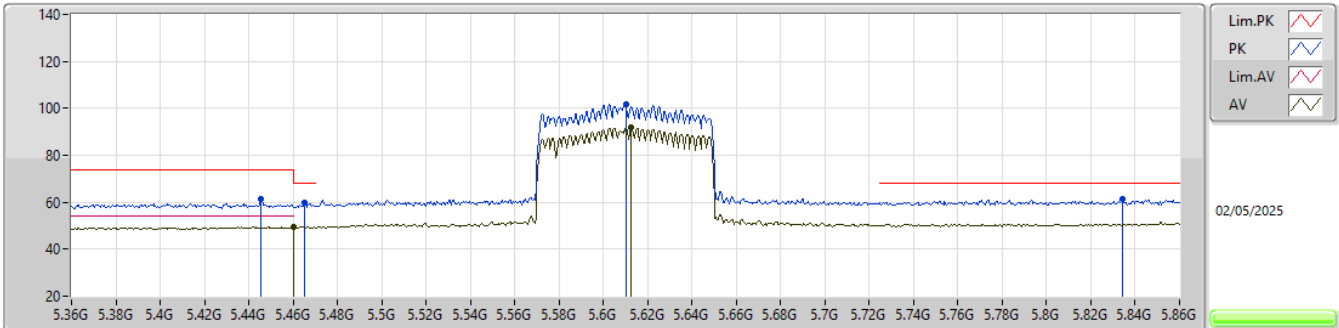EUT_Y_2TX
Setting 13
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4455G	61.24	74.00	-12.76	53.42	3	Horizontal	325	1.80	-	33.48	6.81	32.47			
PK	5.465G	59.78	68.20	-8.42	51.81	3	Horizontal	325	1.80	-	33.59	6.85	32.47			
AV	5.46G	49.61	54.00	-4.39	41.68	3	Horizontal	325	1.80	-	33.56	6.84	32.47			
PK	5.61G	101.59	Inf	-Inf	93.02	3	Horizontal	325	1.80	-	33.92	7.11	32.46			
AV	5.6125G	91.81	Inf	-Inf	83.23	3	Horizontal	325	1.80	-	33.92	7.12	32.46			
PK	5.834G	61.62	68.20	-6.58	52.29	3	Horizontal	325	1.80	-	34.40	7.38	32.45			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TX

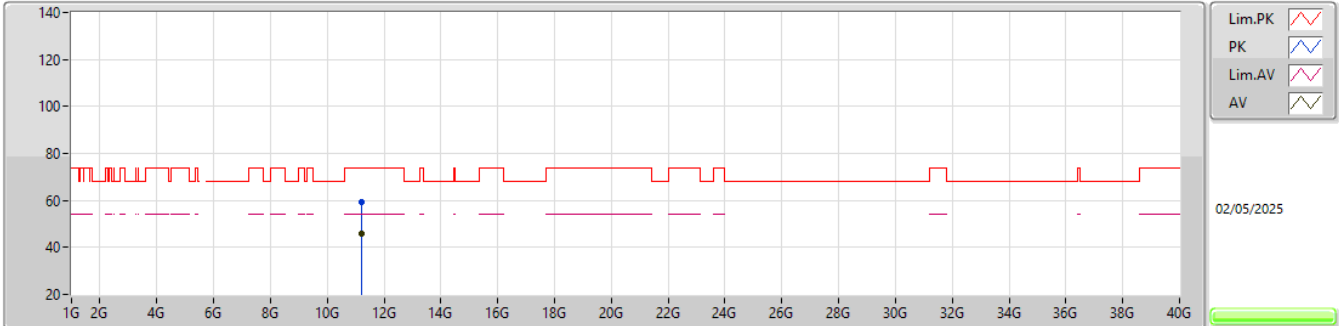


EUT_Y_2TX
Setting 13
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.2202G	59.43	74.00	-14.57	41.53	3	Vertical	38	2.49	-	38.84	11.56	32.50			
AV	11.22009G	45.78	54.00	-8.22	27.88	3	Vertical	38	2.49	-	38.84	11.56	32.50			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TX

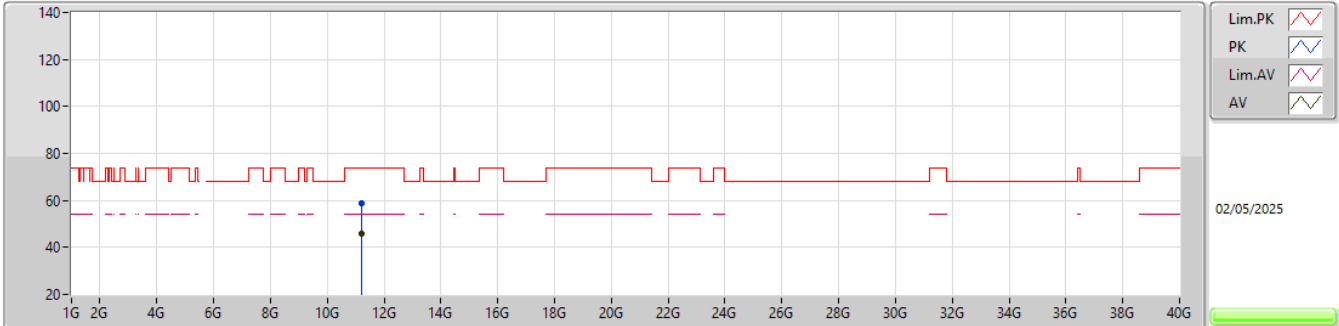


EUT_Y_2TX
Setting 13
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.21917G	58.99	74.00	-15.01	41.09	3	Horizontal	347	1.31	-	38.84	11.56	32.50			
AV	11.2193G	45.92	54.00	-8.08	28.02	3	Horizontal	347	1.31	-	38.84	11.56	32.50			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5690MHz Straddle 5.47-5.725GHz_TX

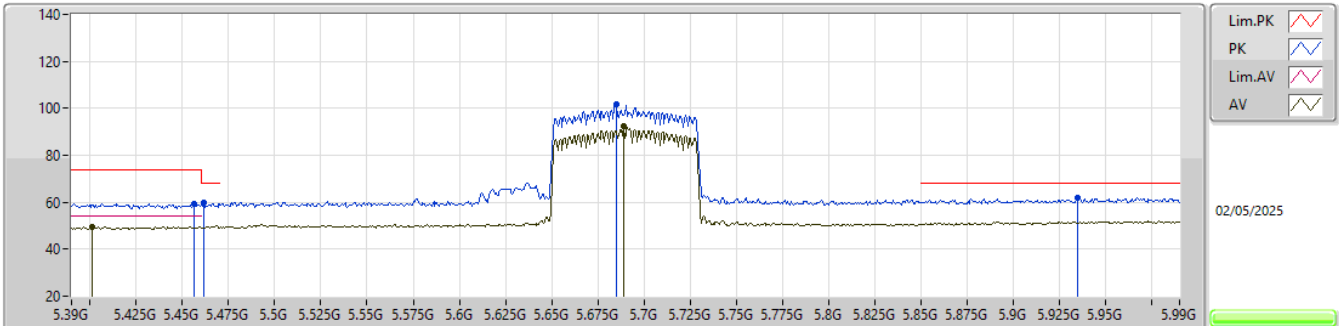EUT_Y_2TX
Setting 12
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4566G	59.49	74.00	-14.51	51.59	3	Vertical	22	1.80	-	33.54	6.83	32.47			
AV	5.4014G	49.46	54.00	-4.54	41.90	3	Vertical	22	1.80	-	33.31	6.73	32.48			
PK	5.4614G	59.74	68.20	-8.46	51.80	3	Vertical	22	1.80	-	33.57	6.84	32.47			
PK	5.6852G	101.75	Inf	-Inf	92.92	3	Vertical	22	1.80	-	34.07	7.21	32.45			
AV	5.6888G	92.38	Inf	-Inf	83.54	3	Vertical	22	1.80	-	34.08	7.21	32.45			
PK	5.9348G	61.95	68.20	-6.25	51.93	3	Vertical	22	1.80	-	35.01	7.45	32.44			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

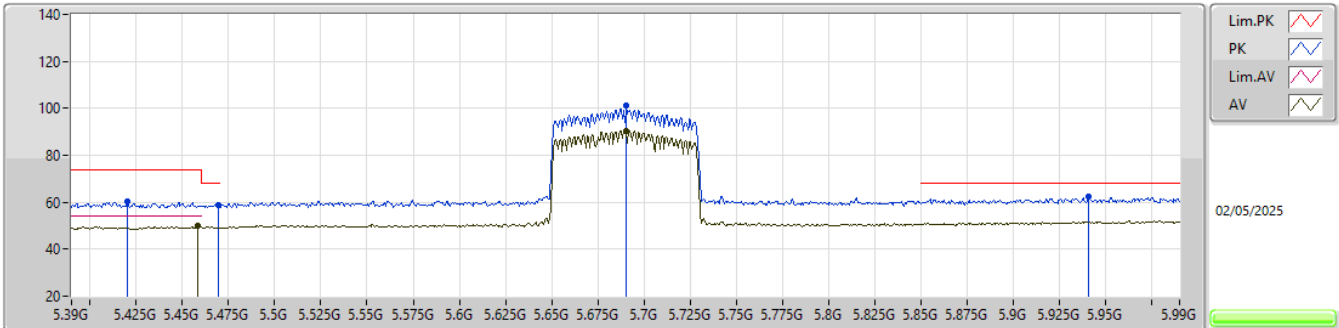


EUT Y_2TX
Setting 12
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.42G	60.56	74.00	-13.44	52.89	3	Horizontal	22	1.80	-	33.38	6.77	32.48
PK	5.4698G	58.86	68.20	-9.34	50.85	3	Horizontal	22	1.80	-	33.62	6.86	32.47
AV	5.4584G	49.80	54.00	-4.20	41.88	3	Horizontal	22	1.80	-	33.55	6.84	32.47
PK	5.6906G	101.04	Inf	-Inf	92.20	3	Horizontal	22	1.80	-	34.08	7.21	32.45
AV	5.69G	90.43	Inf	-Inf	81.59	3	Horizontal	22	1.80	-	34.08	7.21	32.45
PK	5.9408G	62.31	68.20	-5.89	52.25	3	Horizontal	22	1.80	-	35.04	7.46	32.44

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

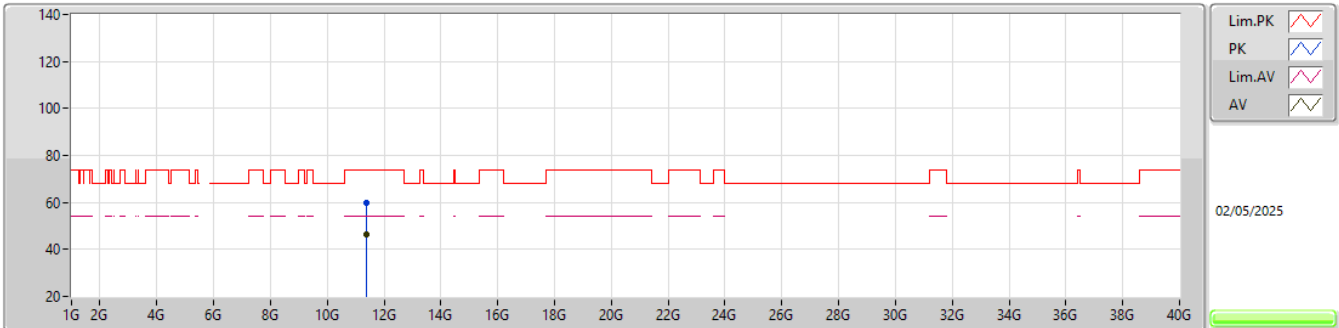


EUT_Y_2TX
Setting 12
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.38016G	59.84	74.00	-14.16	41.55	3	Vertical	305	1.03	-	39.10	11.73	32.54			
AV	11.37963G	46.16	54.00	-7.84	27.87	3	Vertical	305	1.03	-	39.10	11.73	32.54			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

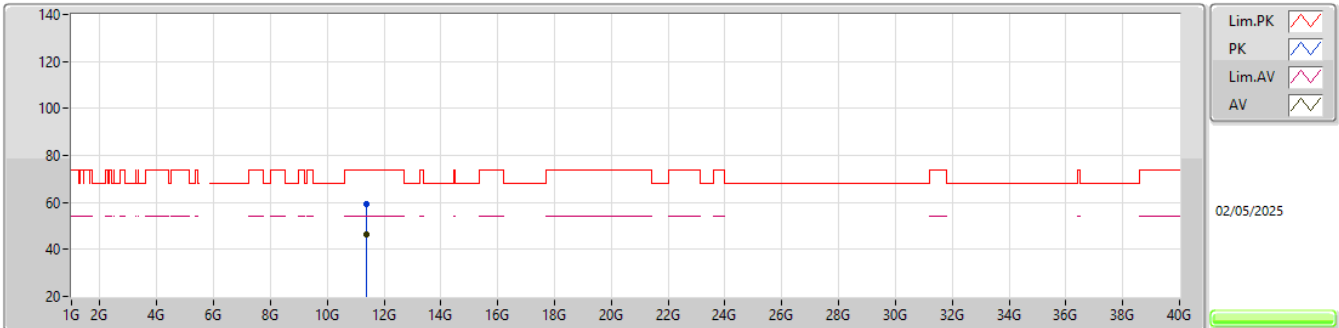


EUT Y_2TX
Setting 12
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37903G	59.19	74.00	-14.81	40.90	3	Horizontal	166	2.67	-	39.10	11.73	32.54			
AV	11.38071G	46.26	54.00	-7.74	27.97	3	Horizontal	166	2.67	-	39.10	11.73	32.54			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

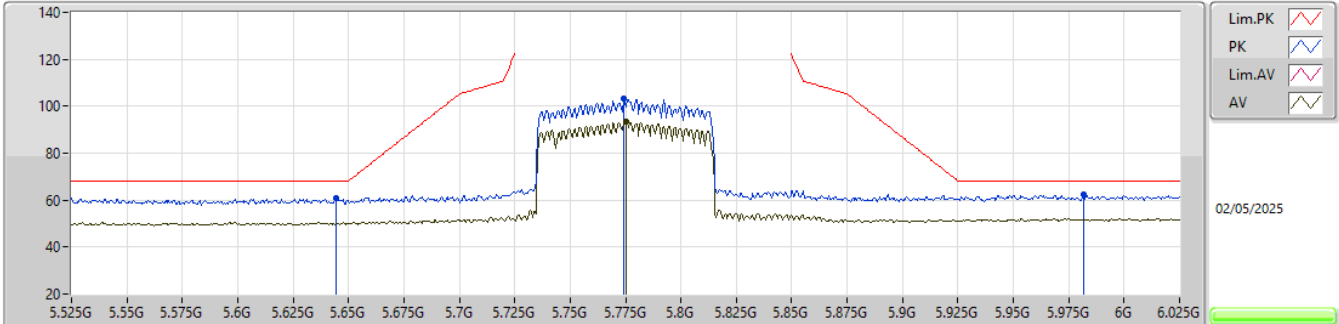


EUT_Y_2TX
Setting 13.5
01-U-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6445G	60.68	68.20	-7.52	51.98	3	Vertical	50	1.02	-	33.99	7.16	32.45			
PK	5.774G	103.11	Inf	-Inf	94.09	3	Vertical	50	1.02	-	34.15	7.32	32.45			
AV	5.7755G	93.56	Inf	-Inf	84.54	3	Vertical	50	1.02	-	34.15	7.32	32.45			
PK	5.9815G	62.18	68.20	-6.02	51.90	3	Vertical	50	1.02	-	35.23	7.49	32.44			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

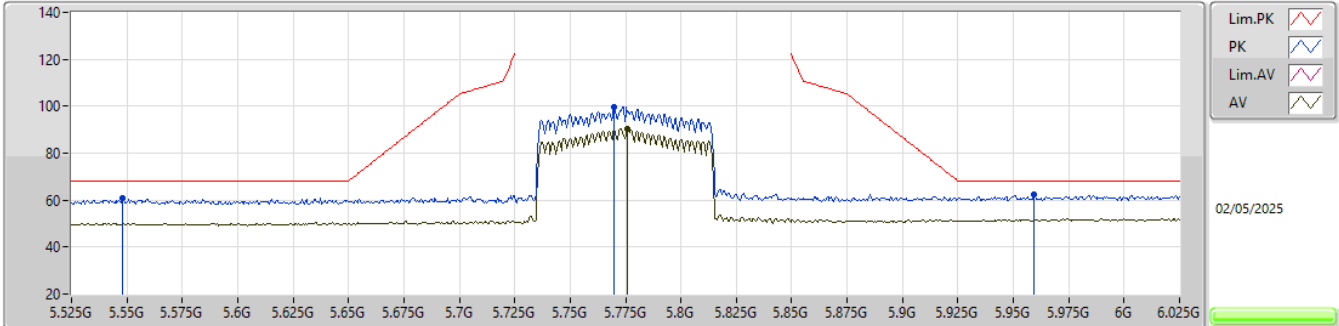


EUT_Y_2TX
Setting 13.5
01-U-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.548G	60.79	68.20	-7.41	52.35	3	Horizontal	190	1.80	-	33.90	7.00	32.46			
PK	5.77G	99.61	Inf	-Inf	90.61	3	Horizontal	190	1.80	-	34.14	7.31	32.45			
AV	5.776G	90.56	Inf	-Inf	81.54	3	Horizontal	190	1.80	-	34.15	7.32	32.45			
PK	5.9595G	62.23	68.20	-5.97	52.06	3	Horizontal	190	1.80	-	35.14	7.47	32.44			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

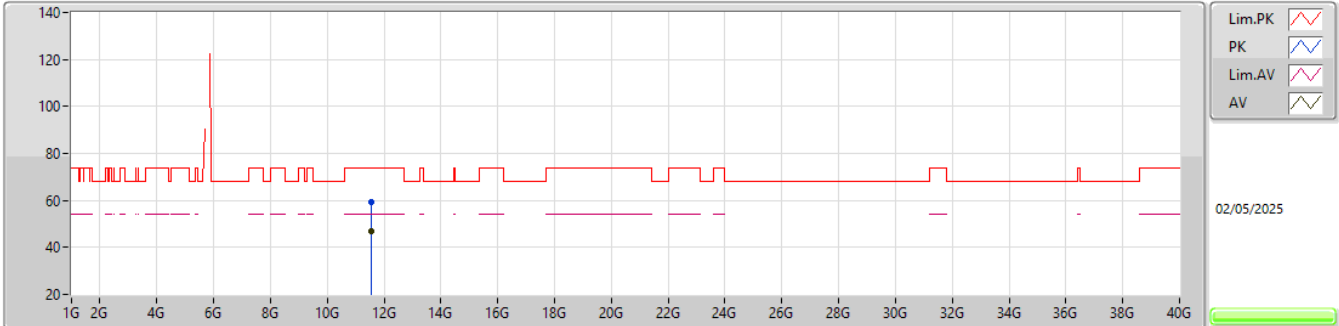


EUT_Y_2TX
Setting 13.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.55024G	59.37	74.00	-14.63	41.07	3	Vertical	344	1.63	-	39.00	11.90	32.60			
AV	11.55049G	46.64	54.00	-7.36	28.34	3	Vertical	344	1.63	-	39.00	11.90	32.60			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

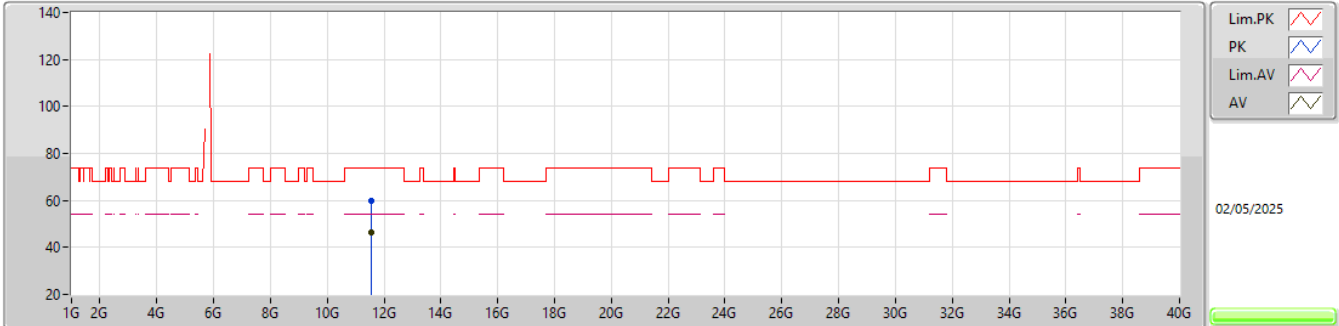

EUT_Y_2TX
Setting 13.5
01-U-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.55048G	59.92	74.00	-14.08	41.62	3	Horizontal	92	2.01	-	39.00	11.90	32.60			
AV	11.54993G	46.38	54.00	-7.62	28.08	3	Horizontal	92	2.01	-	39.00	11.90	32.60			