Plots of EUT ceased transmission in the time domain

UNII5_20M_5955_Test Result

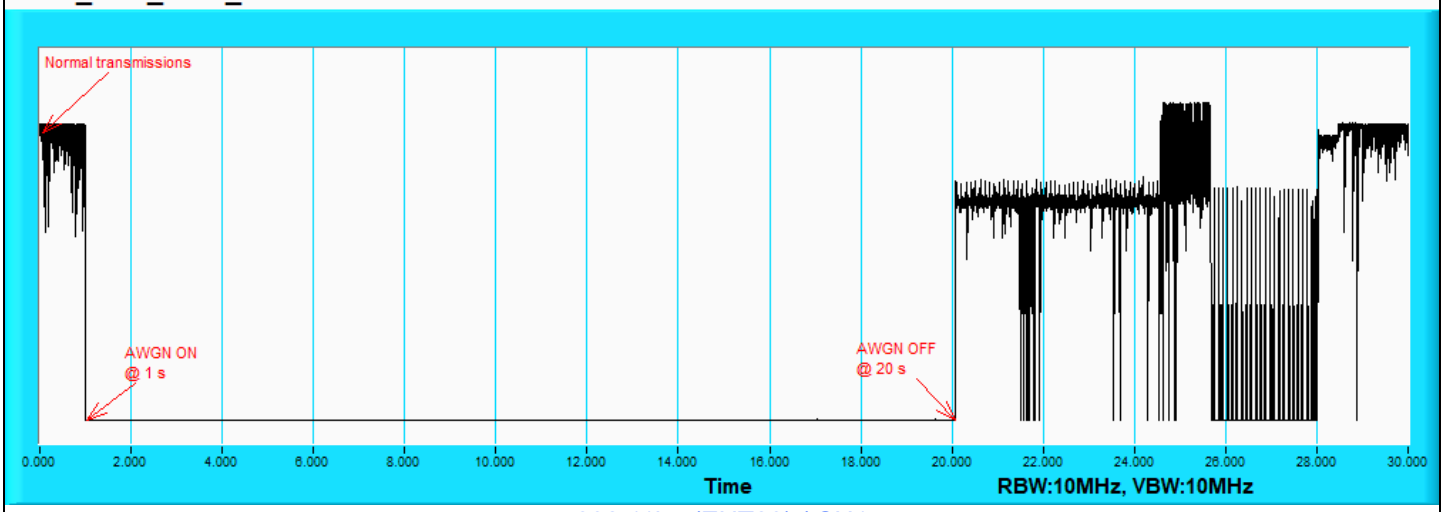

802.11be (EHT20) / CH1

UNII5_320M_5950_Test Result

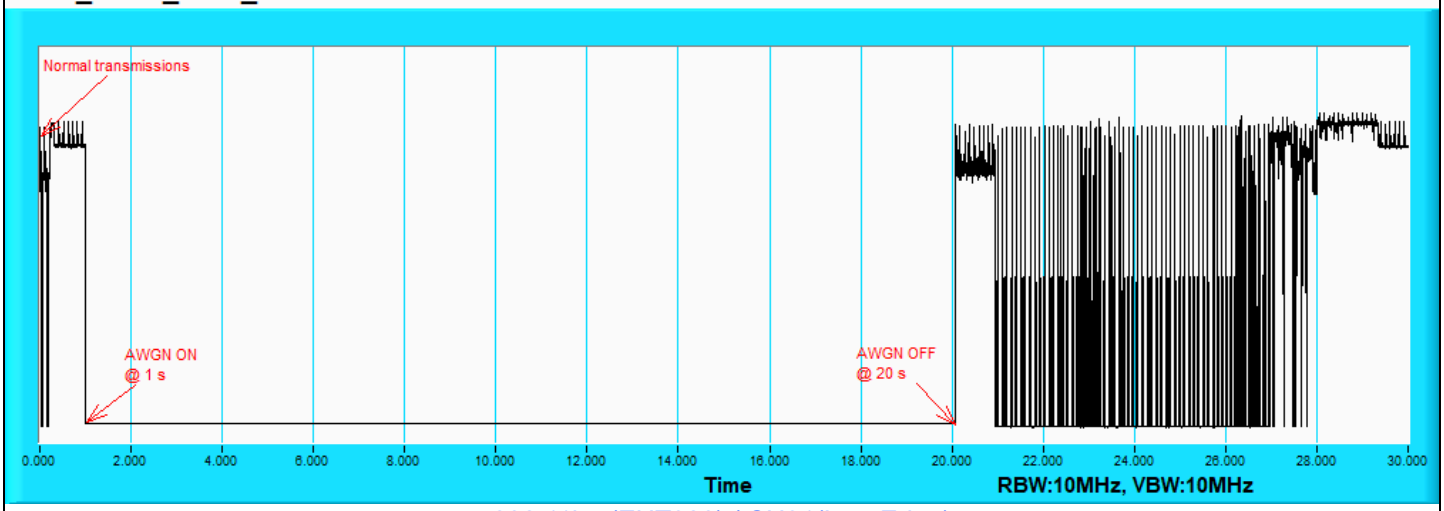

802.11be (EHT320) / CH31(Low Edge)

UNII5_320M_6105_Test Result

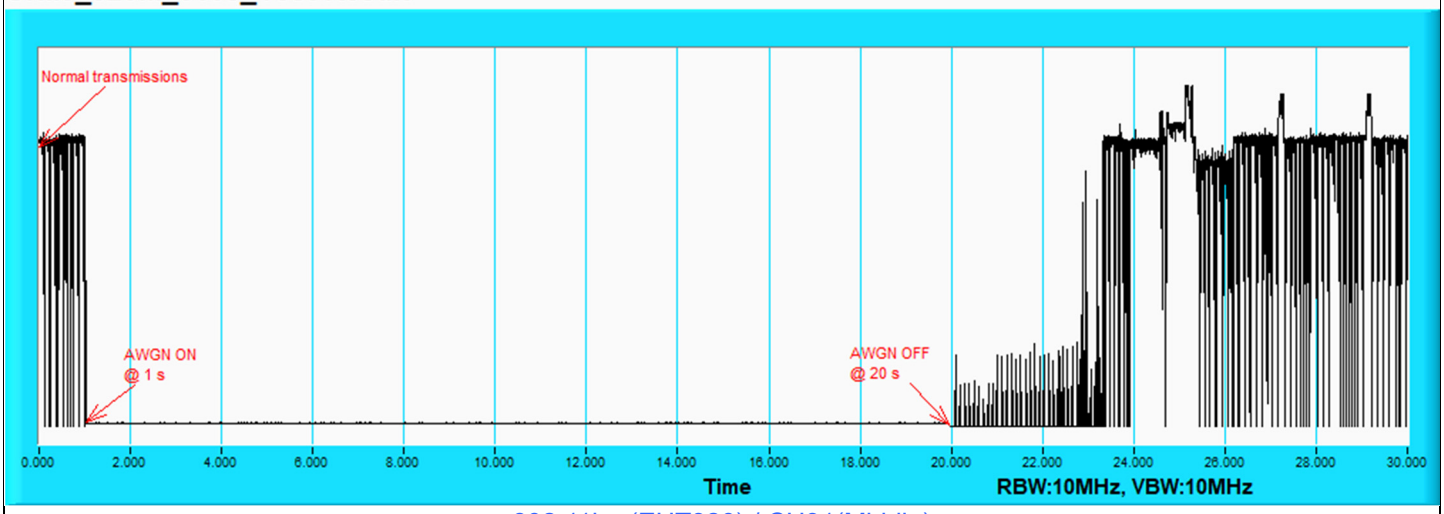

802.11be (EHT320) / CH31(Middle)

Plots of EUT ceased transmission in the time domain

UNII5_320M_6260_Test Result

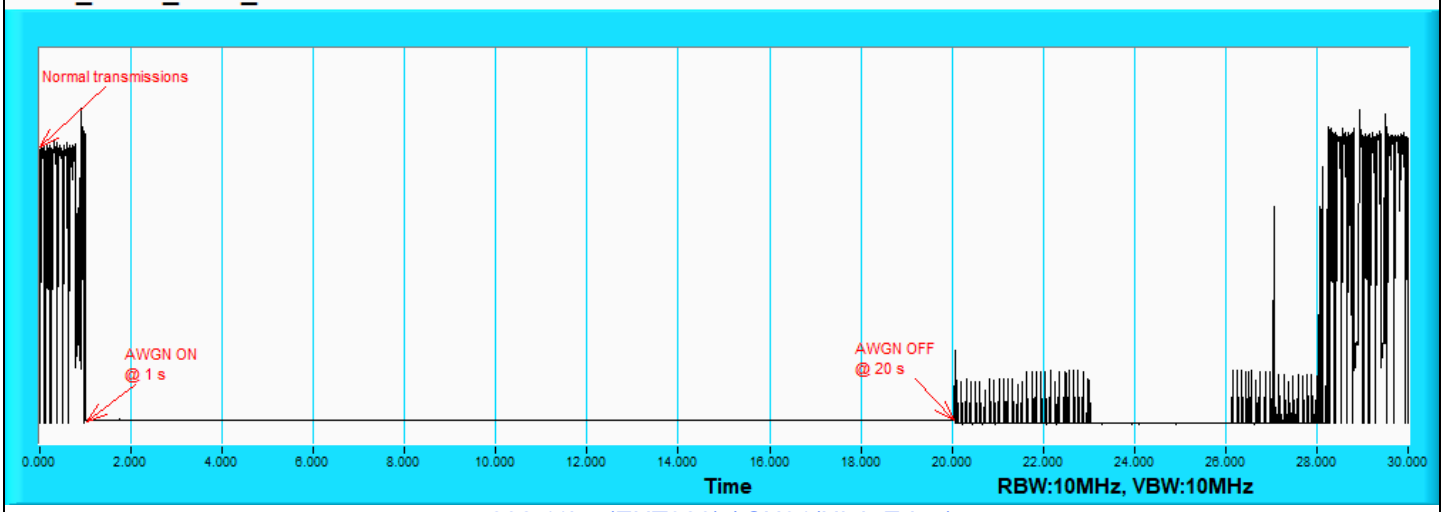

802.11be (EHT320) / CH31(High Edge)

For U-NII-6

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	97	6435	6435	-74.12	3.89	0	-78.01	-62	OFF
					-74.62	3.89	0	-78.51	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
	320	127	6585	6430	-77.34	3.89	0	-81.23	-62	OFF
					-77.84	3.89	0	-81.73	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
				6585	-74.49	3.89	0	-78.38	-62	OFF
					-74.99	3.89	0	-78.88	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
				6740	-76.45	3.89	0	-80.34	-62	OFF
					-76.95	3.89	0	-80.84	-62	Minimal
					-78.11	3.89	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, the EUT's connection has been restored.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6435	x	v	v	v	v	v	v	v	v	v	90%	90%	Pass
	320	6430	v	v	x	v	v	v	v	v	v	v	90%	90%	Pass
		6585	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	x	v	v	v	90%	90%	Pass

Plots of EUT Tx waveform

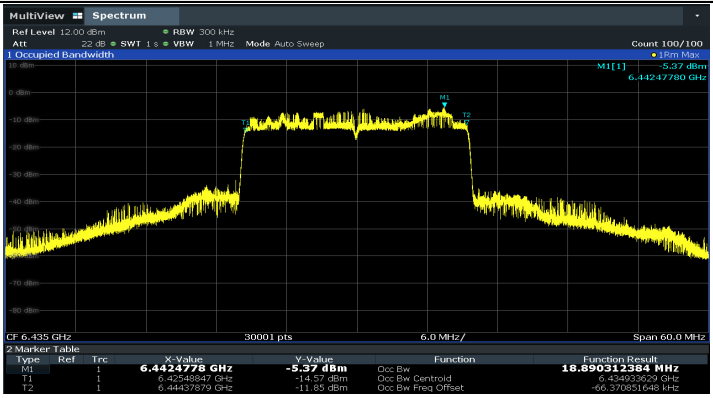

802.11be (EHT20) / CH97

802.11be (EHT320) / CH127

Plots of Injected signal (AWGN) level

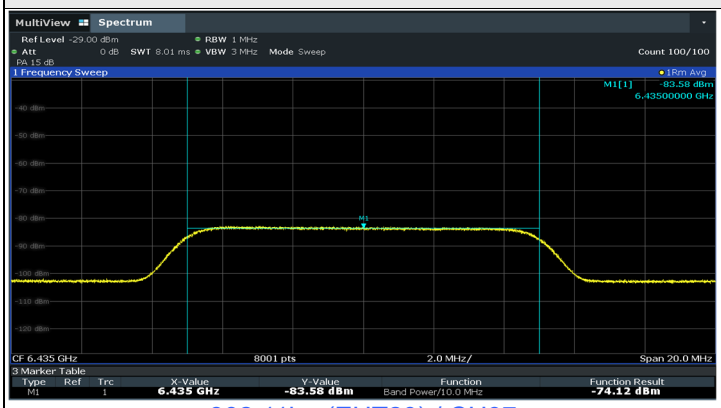

802.11be (EHT20) / CH97

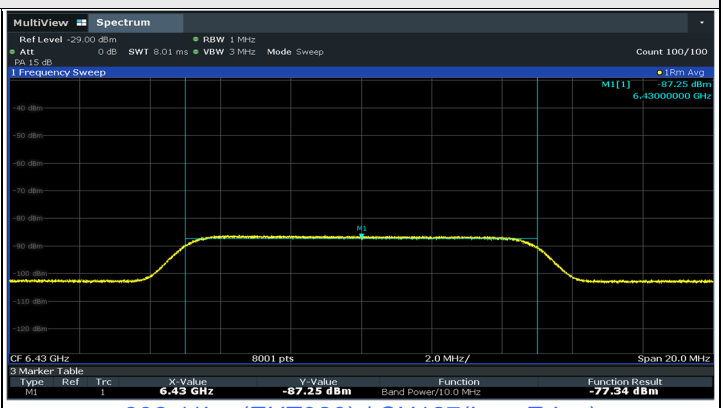

802.11be (EHT320) / CH127(Low Edge)

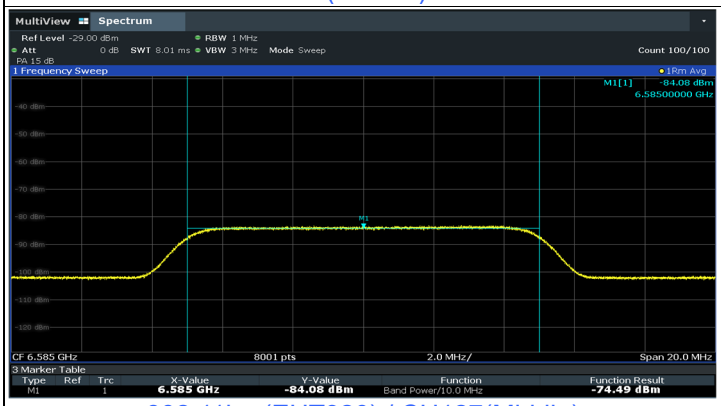

802.11be (EHT320) / CH127(Middle)

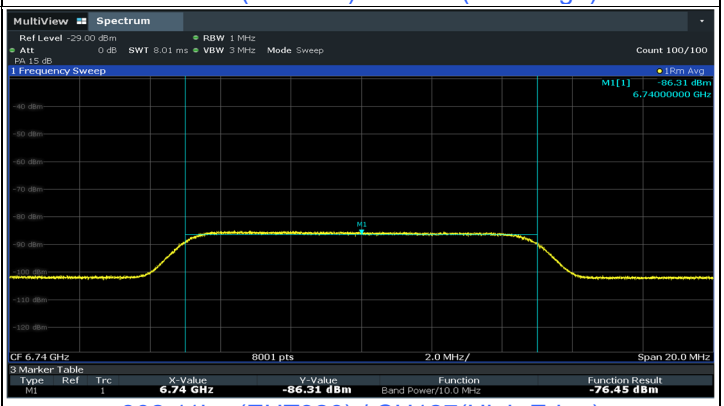

802.11be (EHT320) / CH127(High Edge)

Plots of EUT ceased transmission in the time domain

UNII6_20M_6435_Test Result

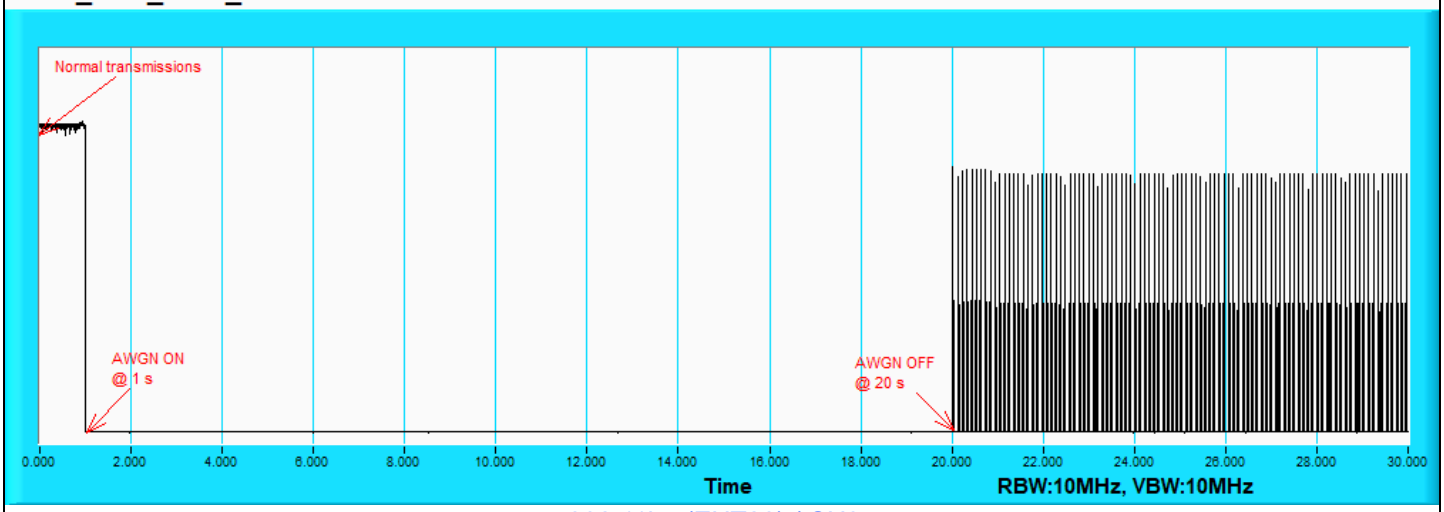

802.11be (EHT20) / CH97

UNII6 11be320 6G_CH 127_6430

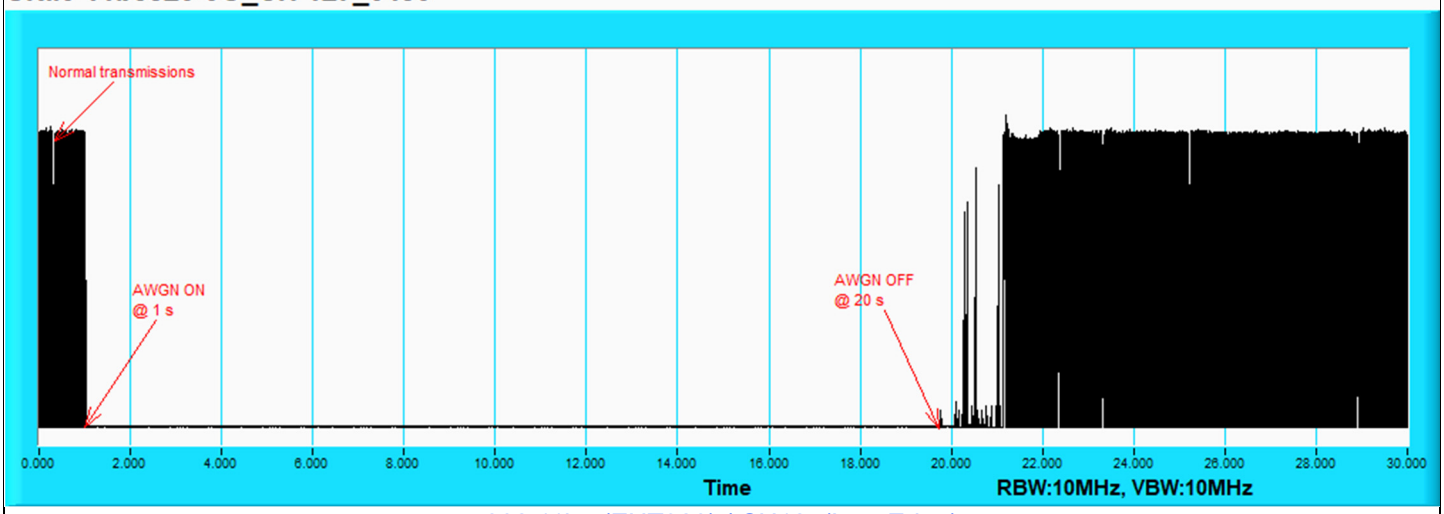

802.11be (EHT320) / CH127(Low Edge)

UNII6 11be320 6G_CH 127_6585

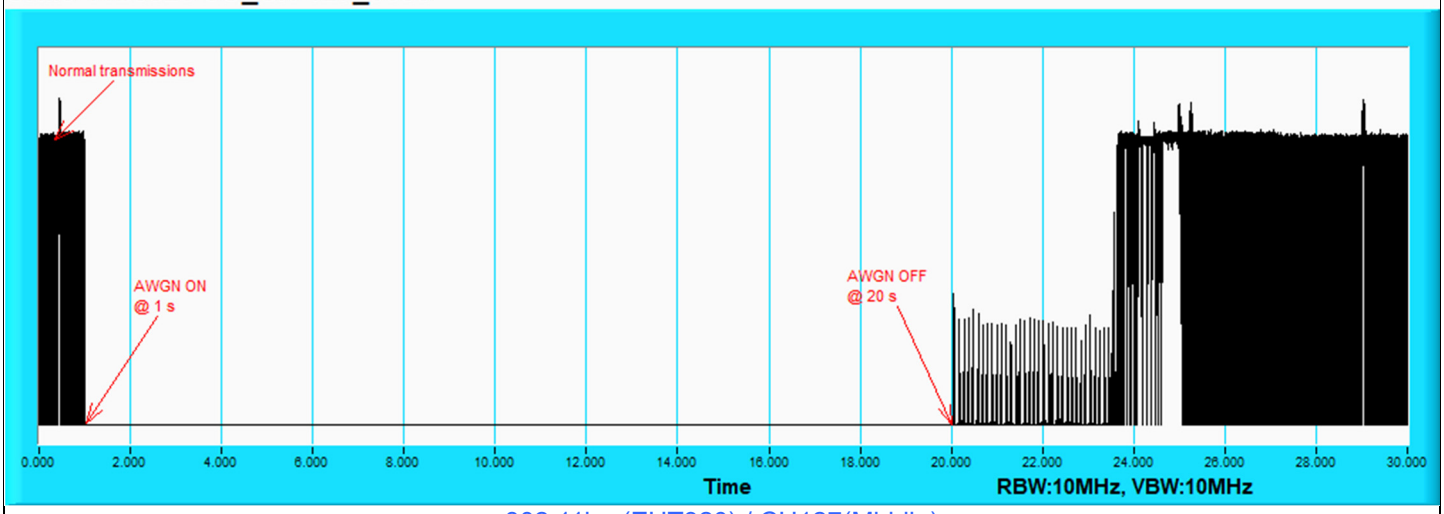

802.11be (EHT320) / CH127(Middle)

Plots of EUT ceased transmission in the time domain

UNII6 11be320 6G_CH 127_6740

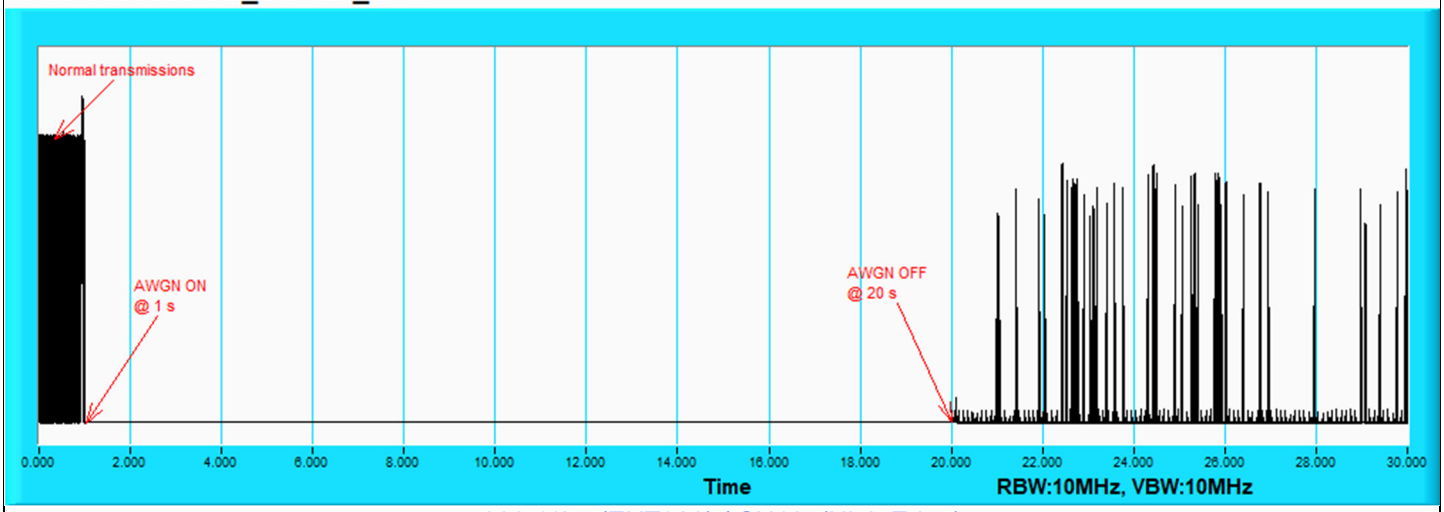

802.11be (EHT320) / CH127(High Edge)

For U-NII-7

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	129	6595	6595	-73.13	3.89	0	-77.02	-62	OFF
					-73.63	3.89	0	-77.52	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
	320	159	6745	6590	-76.42	3.89	0	-80.31	-62	OFF
					-76.92	3.89	0	-80.81	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
				6745	-73.33	3.89	0	-77.22	-62	OFF
					-73.83	3.89	0	-77.72	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
				6900	-76.28	3.89	0	-80.17	-62	OFF
					-76.78	3.89	0	-80.67	-62	Minimal
					-78.11	3.89	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, the EUT's connection has been restored.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6595	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	x	90%	90%	Pass
		6745	v	v	v	v	x	v	v	v	v	v	90%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

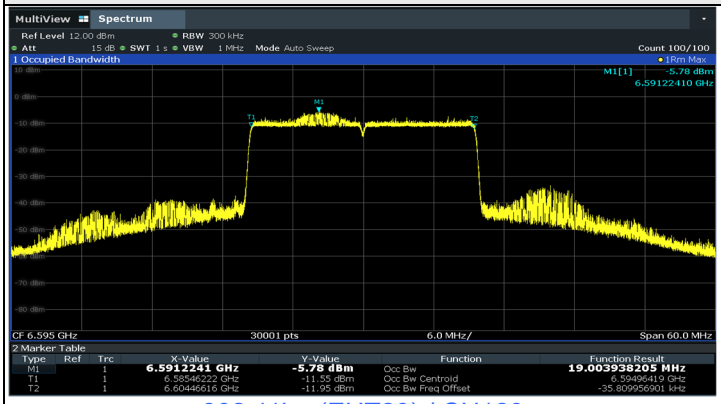

802.11be (EHT20) / CH129

802.11be (EHT320) / CH159

Plots of Injected signal (AWGN) level

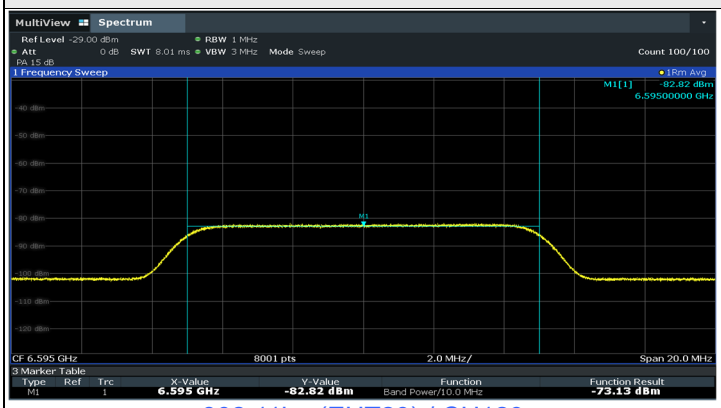

802.11be (EHT20) / CH129

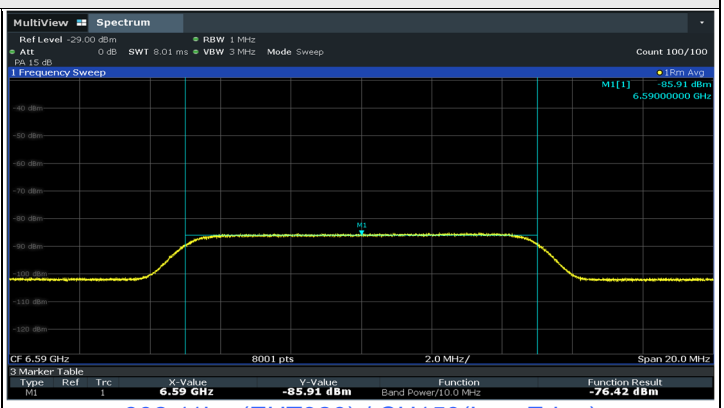

802.11be (EHT320) / CH159(Low Edge)

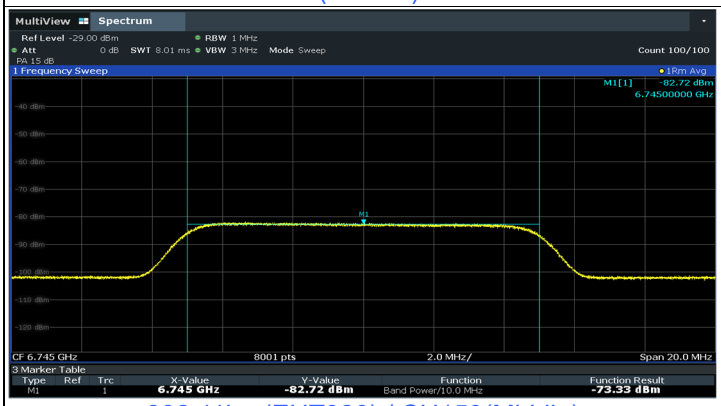

802.11be (EHT320) / CH159(Middle)

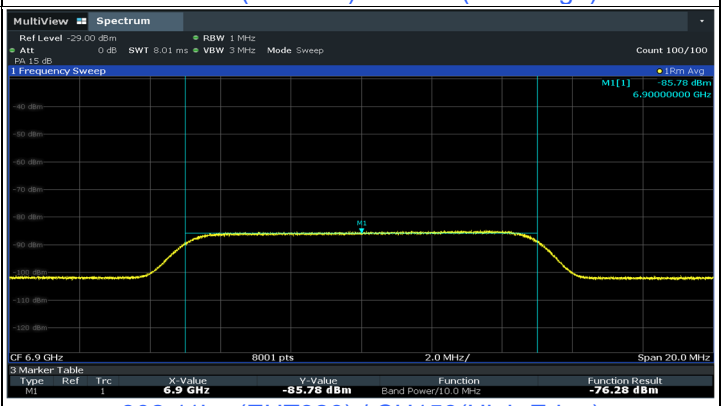

802.11be (EHT320) / CH159(High Edge)

Plots of EUT ceased transmission in the time domain

UNII7 11be20 6G_CH 129_6595

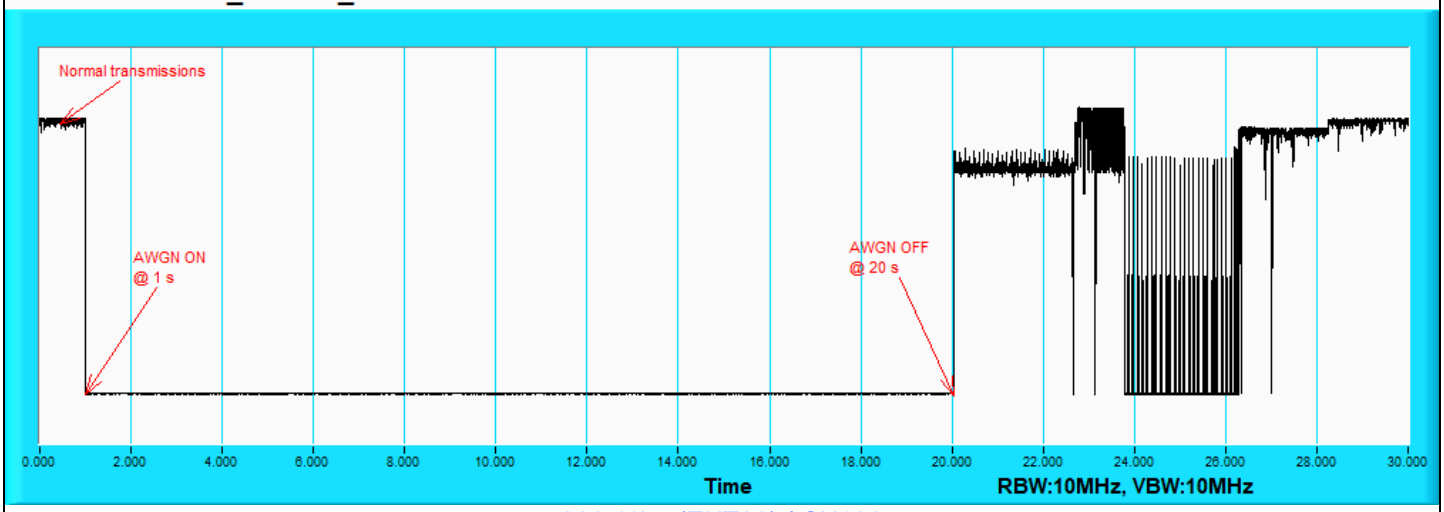

802.11be (EHT20) / CH129

UNII\7 11be320 6G_CH 159_6590

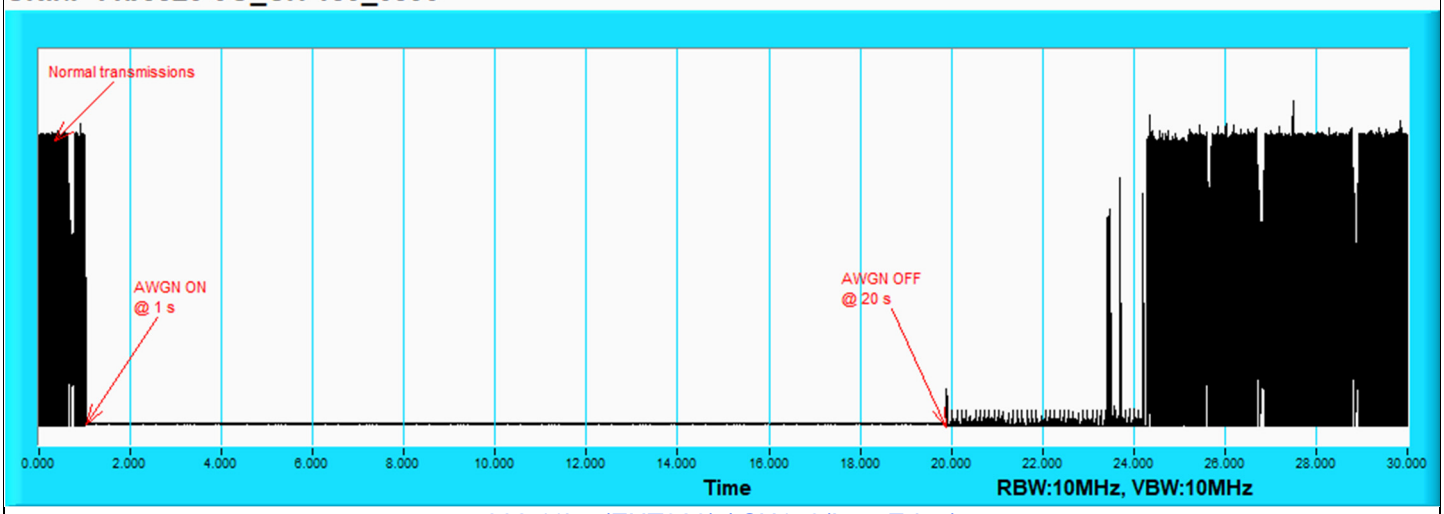

802.11be (EHT320) / CH159(Low Edge)

UNII7 11be320 6G_CH 159_6745

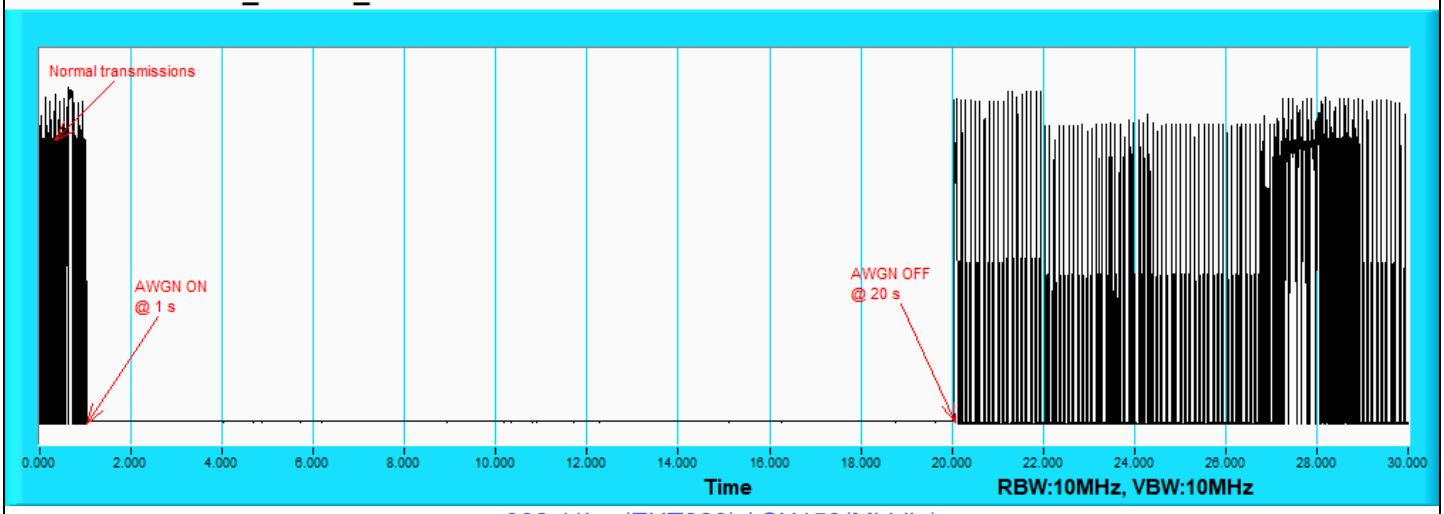

802.11be (EHT320) / CH159(Middle)

Plots of EUT ceased transmission in the time domain

UNII7 11be320 6G_CH 159_6900

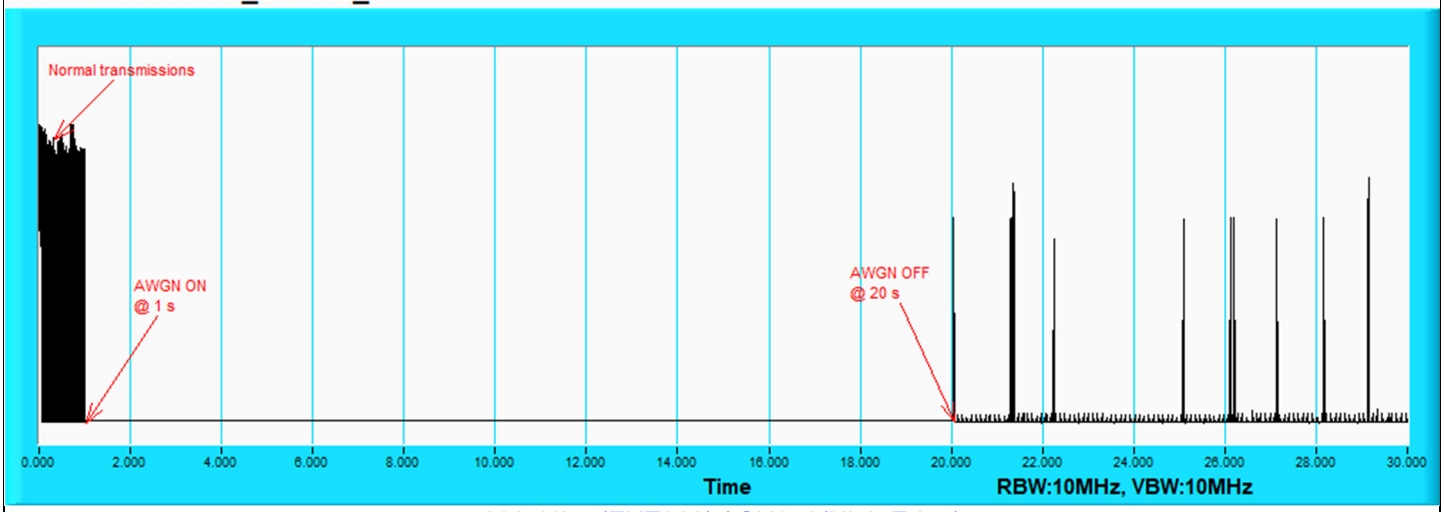

802.11be (EHT320) / CH159(High Edge)

For U-NII-8

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	189	6895	6895	-74.59	3.89	0	-78.48	-62	OFF
					-75.09	3.89	0	-78.98	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
	320	191	6905	6750	-77.14	3.89	0	-81.03	-62	OFF
					-77.64	3.89	0	-81.53	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
				6905	-75.88	3.89	0	-79.77	-62	OFF
					-76.38	3.89	0	-80.27	-62	Minimal
					-78.11	3.89	0	-82	-62	ON
				7060	-77.09	3.89	0	-80.98	-62	OFF
					-77.59	3.89	0	-81.48	-62	Minimal
					-78.11	3.89	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, the EUT's connection has been restored.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6895	v	v	v	v	v	v	x	v	v	v	90%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

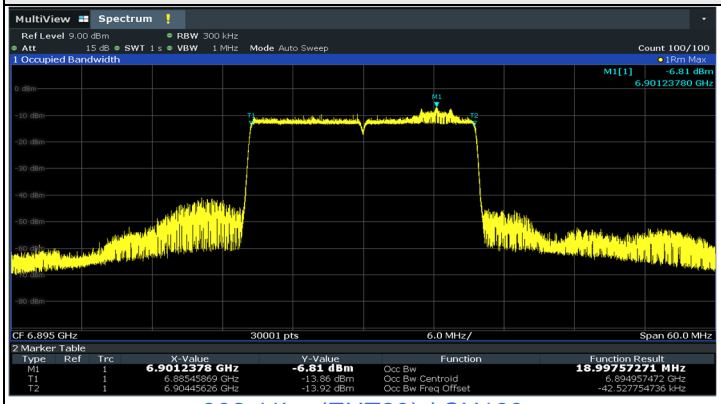

802.11be (EHT20) / CH189

802.11be (EHT320) / CH191

Plots of Injected signal (AWGN) level

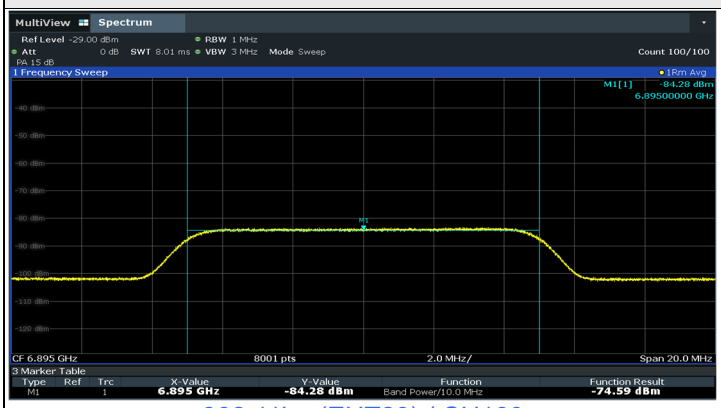

802.11be (EHT20) / CH189

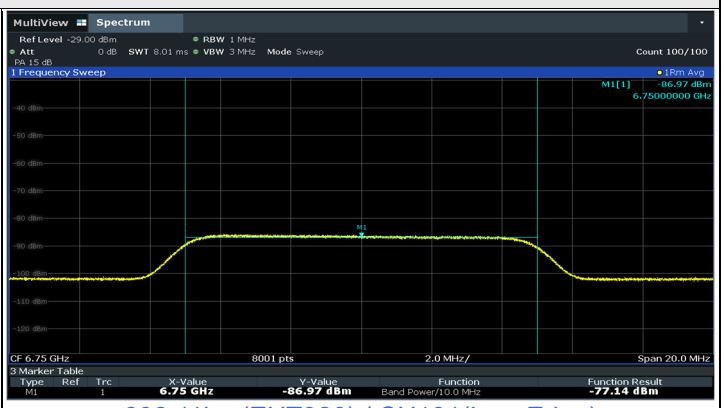

802.11be (EHT320) / CH191(Low Edge)

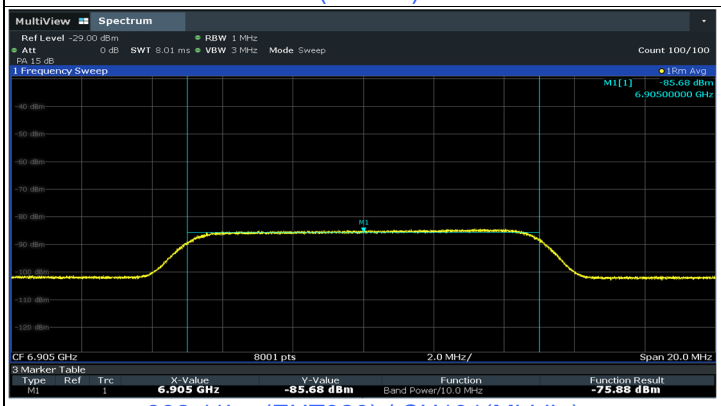

802.11be (EHT320) / CH191(Middle)

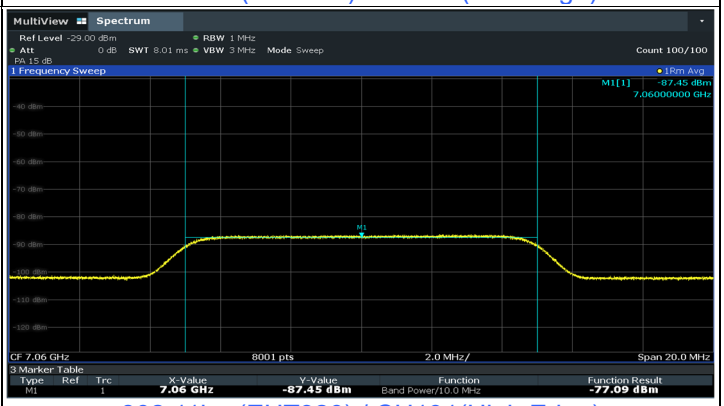

802.11be (EHT320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain

UNII8 11be20 6G_CH 189_6895

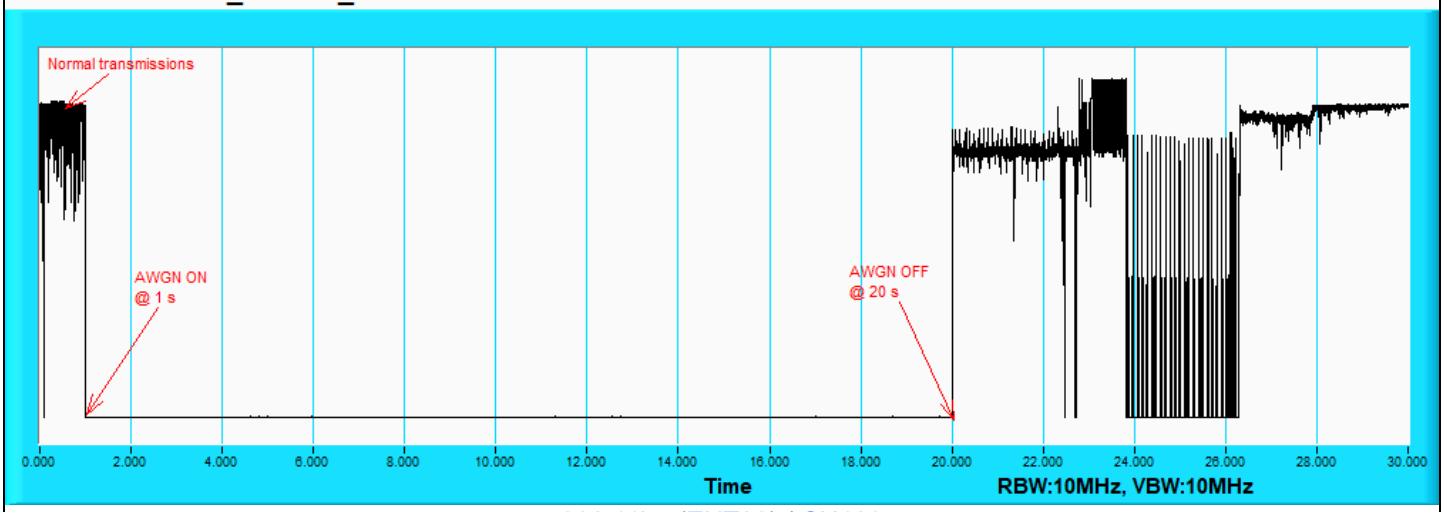

802.11be (EHT20) / CH189

UNII8 11be320 6G_CH 191_6750

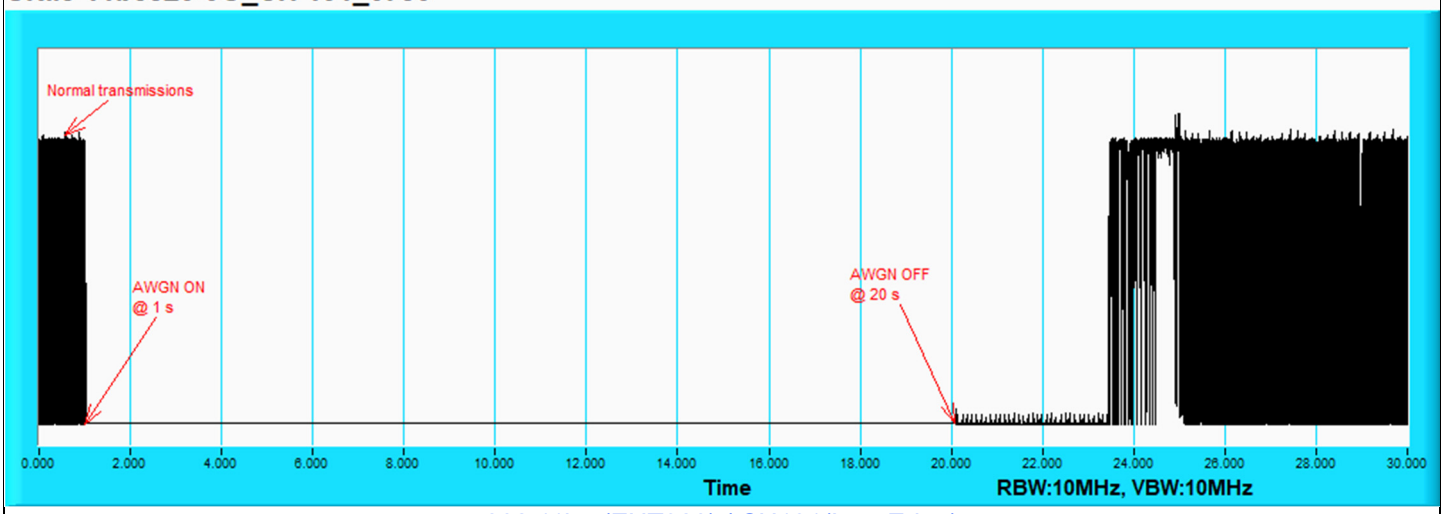

802.11be (EHT320) / CH191(Low Edge)

UNII8 11be320 6G_CH 191_6905

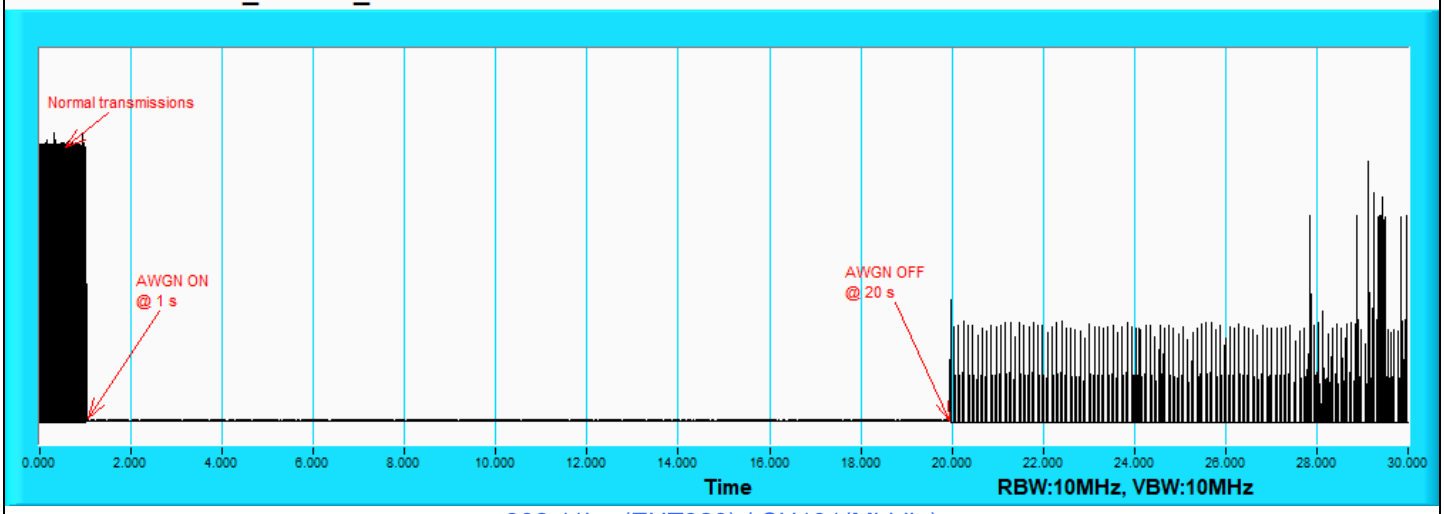

802.11be (EHT320) / CH191(Middle)

Plots of EUT ceased transmission in the time domain

UNII8 11be320 6G_CH 191_7060

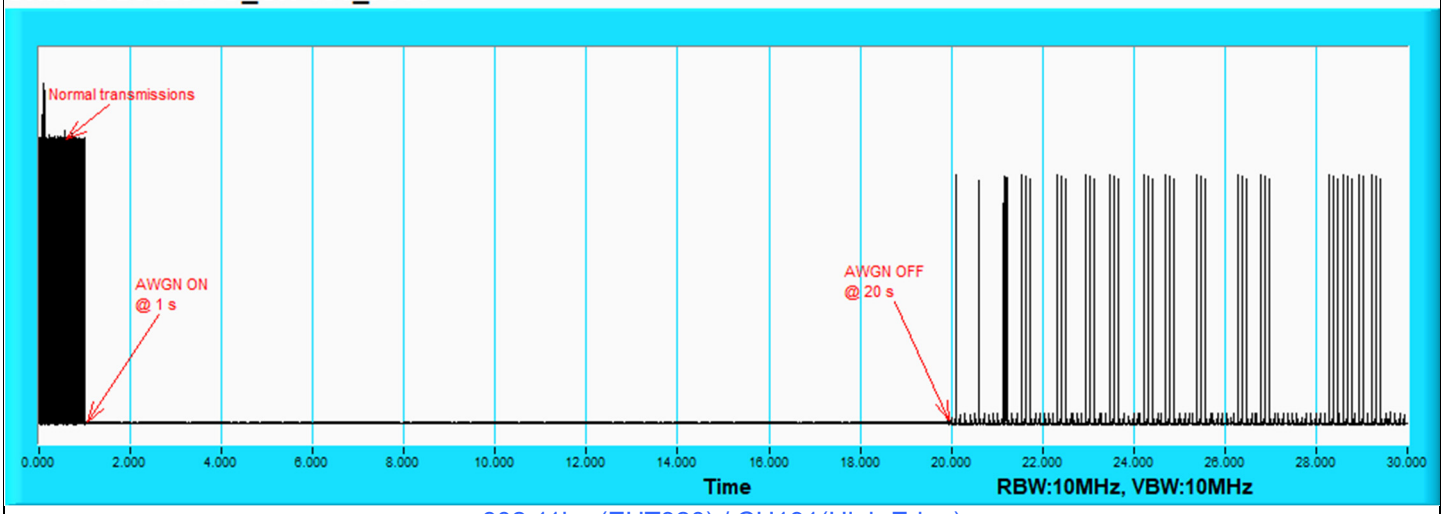

802.11be (EHT320) / CH191(High Edge)

7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	**Channel**	CH 191：6905 MHz
Frequency Range	150 kHz ~ 30 MHz	**Detector Function & Resolution Bandwidth**	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	25 °C, 69 % RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	**Frequency (MHz)**	**Correction Factor (dB)**	**Reading Value (dBuV)**		**Emission Level (dBuV)**		**Limit (dBuV)**		**Margin (dB)**	
			Q.P.	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**
1	0.17800	9.77	28.11	7.29	37.88	17.06	64.58	54.58	-26.70	-37.52
2	0.19800	9.79	36.38	23.35	46.17	33.14	63.69	53.69	-17.52	-20.55
3	0.22600	9.80	27.94	15.44	37.74	25.24	62.60	52.60	-24.86	-27.36
4	0.27400	9.82	19.90	2.27	29.72	12.09	61.00	51.00	-31.28	-38.91
5	0.29800	9.83	23.84	13.28	33.67	23.11	60.30	50.30	-26.63	-27.19
6	0.52707	9.90	26.01	22.44	35.91	32.34	56.00	46.00	-20.09	-13.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

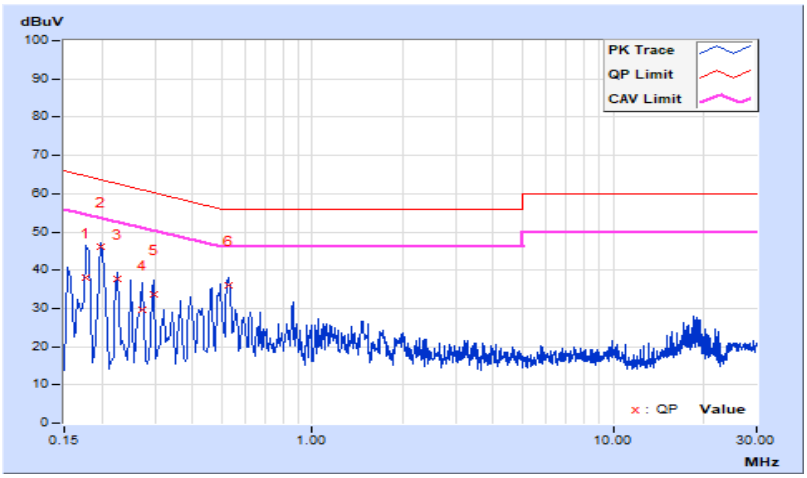

RF Mode	802.11be (EHT320)	**Channel**	CH 191：6905 MHz
Frequency Range	150 kHz ~ 30 MHz	**Detector Function & Resolution Bandwidth**	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	25 °C, 69 % RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	**Frequency (MHz)**	**Correction Factor (dB)**	**Reading Value (dBuV)**		**Emission Level (dBuV)**		**Limit (dBuV)**		**Margin (dB)**	
			Q.P.	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**
1	0.16600	9.71	40.30	29.83	50.01	39.54	65.16	55.16	-15.15	-15.62
2	0.19400	9.72	32.74	24.07	42.46	33.79	63.86	53.86	-21.40	-20.07
3	0.21800	9.74	22.92	4.04	32.66	13.78	62.89	52.89	-30.23	-39.11
4	0.24200	9.76	21.73	2.81	31.49	12.57	62.03	52.03	-30.54	-39.46
5	0.26200	9.78	25.64	19.32	35.42	29.10	61.37	51.37	-25.95	-22.27
6	**0.52600**	**9.94**	**29.92**	**28.54**	**39.86**	**38.48**	**56.00**	**46.00**	**-16.14**	**-7.52**

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

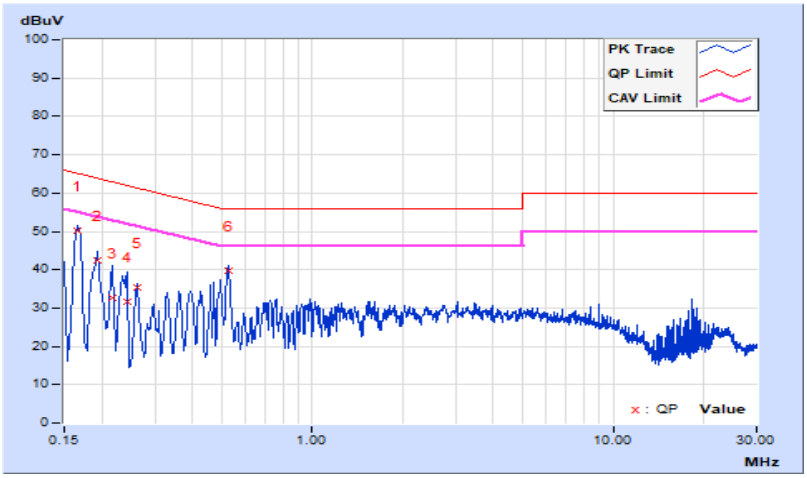

7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320)	**Channel**	CH 191：6905 MHz
Frequency Range	30 MHz ~ 1 GHz	**Detector Function & Bandwidth**	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	44.06	29.7 QP	40.0	-10.3	1.50 H	259	38.9	-9.2
2	132.62	28.0 QP	43.5	-15.5	1.50 H	260	37.8	-9.8
3	159.33	31.8 QP	43.5	-11.7	1.01 H	278	40.2	-8.4
4	284.45	29.0 QP	46.0	-17.0	1.01 H	257	36.6	-7.6
5	357.55	27.9 QP	46.0	-18.1	1.01 H	247	34.4	-6.5
6	516.41	27.6 QP	46.0	-18.4	1.01 H	343	30.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

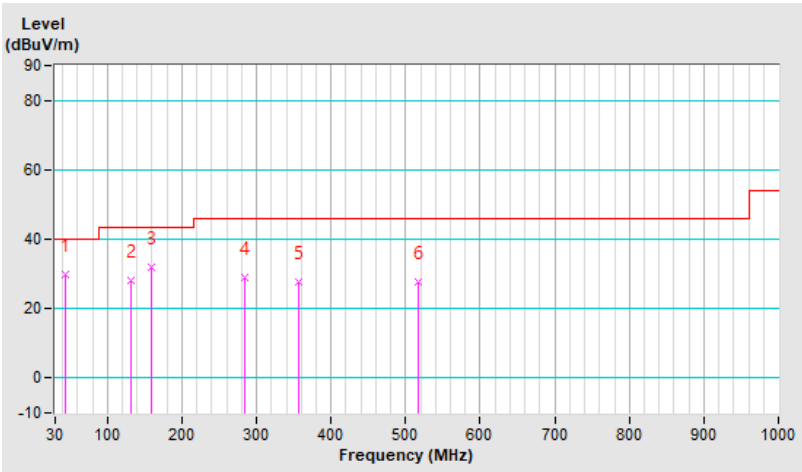

RF Mode	802.11be (EHT320)	Channel	CH 191：6905 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	**31.41**	**29.8 QP**	**40.0**	**-10.2**	**1.49 V**	**16**	**40.4**	**-10.6**
2	46.87	29.7 QP	40.0	-10.3	1.49 V	262	38.7	-9.0
3	131.22	28.5 QP	43.5	-15.0	1.00 V	241	38.5	-10.0
4	159.33	32.6 QP	43.5	-10.9	1.00 V	267	41.0	-8.4
5	284.45	27.2 QP	46.0	-18.8	1.49 V	163	34.8	-7.6
6	537.49	27.7 QP	46.0	-18.3	1.00 V	309	30.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

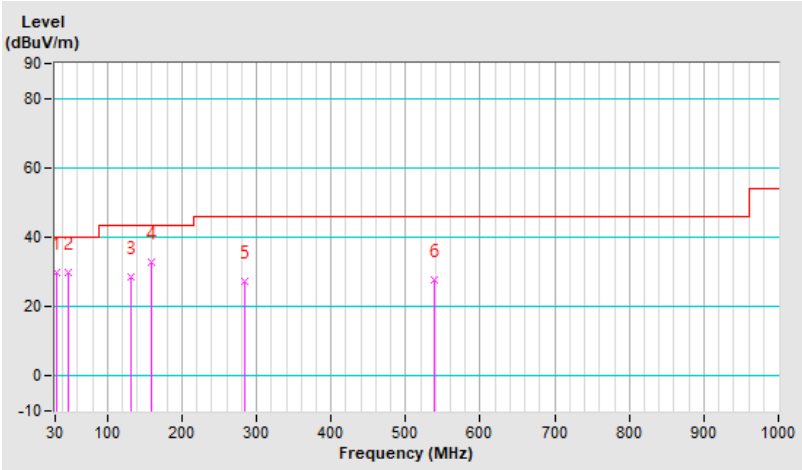

7.9 Unwanted Emissions above 1 GHz

RF Mode	802.11a	**Channel**	CH 1：5955 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#5925.00	50.2 PK	88.2	-38.0	3.62 H	55	37.9	12.3
2	#5925.00	37.0 AV	68.2	-31.2	3.62 H	55	24.7	12.3
3	*5955.00	103.2 PK			3.62 H	55	60.2	43.0
4	*5955.00	92.2 AV			3.62 H	55	49.2	43.0
5	11910.00	59.3 PK	74.0	-14.7	1.42 H	118	39.7	19.6
6	11910.00	45.7 AV	54.0	-8.3	1.42 H	118	26.1	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#5925.00	50.5 PK	88.2	-37.7	1.52 V	30	38.2	12.3
2	#5925.00	37.3 AV	68.2	-30.9	1.52 V	30	25.0	12.3
3	*5955.00	107.3 PK			1.52 V	30	64.3	43.0
4	*5955.00	97.0 AV			1.52 V	30	54.0	43.0
5	11910.00	59.7 PK	74.0	-14.3	2.41 V	163	40.1	19.6
6	11910.00	46.1 AV	54.0	-7.9	2.41 V	163	26.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 45：6175 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6175.00	103.1 PK			3.68 H	59	59.9	43.2
2	*6175.00	92.4 AV			3.68 H	59	49.2	43.2
3	12350.00	59.2 PK	74.0	-14.8	1.45 H	111	39.1	20.1
4	12350.00	45.6 AV	54.0	-8.4	1.45 H	111	25.5	20.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6175.00	107.2 PK			1.49 V	33	64.0	43.2
2	*6175.00	96.8 AV			1.49 V	33	53.6	43.2
3	12350.00	59.6 PK	74.0	-14.4	2.44 V	169	39.5	20.1
4	12350.00	46.0 AV	54.0	-8.0	2.44 V	169	25.9	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	**Channel**	CH 93：6415 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6415.00	103.1 PK			3.55 H	59	58.8	44.3
2	*6415.00	92.0 AV			3.55 H	59	47.7	44.3
3	#12830.00	59.2 PK	88.2	-29.0	1.46 H	115	38.2	21.0
4	#12830.00	45.8 AV	68.2	-22.4	1.46 H	115	24.8	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6415.00	107.2 PK			1.56 V	33	62.9	44.3
2	*6415.00	97.1 AV			1.56 V	33	52.8	44.3
3	#12830.00	59.6 PK	88.2	-28.6	2.39 V	168	38.6	21.0
4	#12830.00	46.0 AV	68.2	-22.2	2.39 V	168	25.0	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 97：6435 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6435.00	103.3 PK			3.60 H	58	58.8	44.5
2	*6435.00	92.4 AV			3.60 H	58	47.9	44.5
3	#12870.00	59.4 PK	88.2	-28.8	1.41 H	120	38.2	21.2
4	#12870.00	45.7 AV	68.2	-22.5	1.41 H	120	24.5	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6435.00	107.3 PK			1.54 V	31	62.8	44.5
2	*6435.00	96.8 AV			1.54 V	31	52.3	44.5
3	#12870.00	59.8 PK	88.2	-28.4	2.38 V	164	38.6	21.2
4	#12870.00	46.2 AV	68.2	-22.0	2.38 V	164	25.0	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 105：6475 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6475.00	103.4 PK			3.67 H	54	58.7	44.7
2	*6475.00	92.4 AV			3.67 H	54	47.7	44.7
3	#12950.00	59.2 PK	88.2	-29.0	1.47 H	115	38.0	21.2
4	#12950.00	45.6 AV	68.2	-22.6	1.47 H	115	24.4	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6475.00	107.4 PK			1.55 V	39	62.7	44.7
2	*6475.00	97.2 AV			1.55 V	39	52.5	44.7
3	#12950.00	59.8 PK	88.2	-28.4	2.47 V	169	38.6	21.2
4	#12950.00	46.3 AV	68.2	-21.9	2.47 V	169	25.1	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 113：6515 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6515.00	103.1 PK			3.66 H	51	58.1	45.0
2	*6515.00	92.4 AV			3.66 H	51	47.4	45.0
3	#13030.00	59.5 PK	88.2	-28.7	1.48 H	116	38.3	21.2
4	#13030.00	45.7 AV	68.2	-22.5	1.48 H	116	24.5	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6515.00	107.4 PK			1.49 V	31	62.4	45.0
2	*6515.00	97.3 AV			1.49 V	31	52.3	45.0
3	#13030.00	59.6 PK	88.2	-28.6	2.44 V	169	38.4	21.2
4	#13030.00	46.0 AV	68.2	-22.2	2.44 V	169	24.8	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 117：6535 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6535.00	103.4 PK			3.66 H	59	58.3	45.1
2	*6535.00	92.5 AV			3.66 H	59	47.4	45.1
3	#13070.00	59.5 PK	88.2	-28.7	1.44 H	109	38.1	21.4
4	#13070.00	45.8 AV	68.2	-22.4	1.44 H	109	24.4	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6535.00	107.5 PK			1.49 V	36	62.4	45.1
2	*6535.00	97.2 AV			1.49 V	36	52.1	45.1
3	#13070.00	59.8 PK	88.2	-28.4	2.44 V	158	38.4	21.4
4	#13070.00	46.2 AV	68.2	-22.0	2.44 V	158	24.8	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 149：6695 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6695.00	103.4 PK			3.69 H	59	58.4	45.0
2	*6695.00	92.4 AV			3.69 H	59	47.4	45.0
3	13390.00	59.5 PK	74.0	-14.5	1.39 H	125	37.4	22.1
4	13390.00	45.8 AV	54.0	-8.2	1.39 H	125	23.7	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6695.00	107.5 PK			1.48 V	29	62.5	45.0
2	*6695.00	97.2 AV			1.48 V	29	52.2	45.0
3	13390.00	59.9 PK	74.0	-14.1	2.48 V	169	37.8	22.1
4	13390.00	46.4 AV	54.0	-7.6	2.48 V	169	24.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	**Channel**	CH 181：6855 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6855.00	103.4 PK			3.69 H	49	57.9	45.5
2	*6855.00	92.6 AV			3.69 H	49	47.1	45.5
3	#13710.00	59.5 PK	88.2	-28.7	1.39 H	120	36.7	22.8
4	#13710.00	45.8 AV	68.2	-22.4	1.39 H	120	23.0	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6855.00	107.4 PK			1.56 V	37	61.9	45.5
2	*6855.00	97.1 AV			1.56 V	37	51.6	45.5
3	#13710.00	59.9 PK	88.2	-28.3	2.39 V	166	37.1	22.8
4	#13710.00	46.2 AV	68.2	-22.0	2.39 V	166	23.4	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 185：6875 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6875.00	103.2 PK			3.64 H	52	57.6	45.6
2	*6875.00	92.1 AV			3.64 H	52	46.5	45.6
3	#13750.00	59.5 PK	88.2	-28.7	1.47 H	126	36.4	23.1
4	#13750.00	45.9 AV	68.2	-22.3	1.47 H	126	22.8	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6875.00	107.4 PK			1.56 V	38	61.8	45.6
2	*6875.00	97.2 AV			1.56 V	38	51.6	45.6
3	#13750.00	59.9 PK	88.2	-28.3	2.44 V	160	36.8	23.1
4	#13750.00	46.2 AV	68.2	-22.0	2.44 V	160	23.1	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 209：6995 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6995.00	103.5 PK			3.67 H	52	57.0	46.5
2	*6995.00	92.6 AV			3.67 H	52	46.1	46.5
3	#13990.00	59.5 PK	88.2	-28.7	1.48 H	128	35.7	23.8
4	#13990.00	45.8 AV	68.2	-22.4	1.48 H	128	22.0	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6995.00	107.5 PK			1.59 V	38	61.0	46.5
2	*6995.00	97.3 AV			1.59 V	38	50.8	46.5
3	#13990.00	59.6 PK	88.2	-28.6	2.45 V	168	35.8	23.8
4	#13990.00	46.0 AV	68.2	-22.2	2.45 V	168	22.2	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	**Channel**	CH 233：7115 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*7115.00	102.9 PK			3.60 H	123	55.4	47.5
2	*7115.00	92.4 AV			3.60 H	123	44.9	47.5
3	#7125.00	60.0 PK	88.2	-28.2	3.60 H	123	44.4	15.6
4	#7125.00	44.4 AV	68.2	-23.8	3.60 H	123	28.8	15.6
5	#14230.00	59.4 PK	88.2	-28.8	1.48 H	131	35.3	24.1
6	#14230.00	45.5 AV	68.2	-22.7	1.48 H	131	21.4	24.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*7115.00	107.8 PK			1.22 V	54	60.3	47.5
2	*7115.00	97.8 AV			1.22 V	54	50.3	47.5
3	#7125.00	64.0 PK	88.2	-24.2	1.22 V	54	48.4	15.6
4	#7125.00	46.3 AV	68.2	-21.9	1.22 V	54	30.7	15.6
5	#14230.00	59.8 PK	88.2	-28.4	2.47 V	159	35.7	24.1
6	#14230.00	46.3 AV	68.2	-21.9	2.47 V	159	22.2	24.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1：5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.8 PK	88.2	-38.4	3.49 H	66	37.5	12.3
2	#5925.00	37.3 AV	68.2	-30.9	3.49 H	66	25.0	12.3
3	*5955.00	103.8 PK			3.49 H	66	60.8	43.0
4	*5955.00	92.8 AV			3.49 H	66	49.8	43.0
5	11910.00	58.3 PK	74.0	-15.7	1.39 H	49	38.7	19.6
6	11910.00	44.9 AV	54.0	-9.1	1.39 H	49	25.3	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.1 PK	88.2	-38.1	1.50 V	47	37.8	12.3
2	#5925.00	37.7 AV	68.2	-30.5	1.50 V	47	25.4	12.3
3	*5955.00	110.3 PK			1.50 V	47	67.3	43.0
4	*5955.00	98.0 AV			1.50 V	47	55.0	43.0
5	11910.00	58.9 PK	74.0	-15.1	2.55 V	178	39.3	19.6
6	11910.00	45.6 AV	54.0	-8.4	2.55 V	178	26.0	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	**Channel**	CH 45：6175 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6175.00	104.4 PK			3.50 H	61	61.2	43.2
2	*6175.00	93.7 AV			3.50 H	61	50.5	43.2
3	12350.00	58.9 PK	74.0	-15.1	1.44 H	38	38.8	20.1
4	12350.00	45.9 AV	54.0	-8.1	1.44 H	38	25.8	20.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6175.00	109.2 PK			1.51 V	60	66.0	43.2
2	*6175.00	97.9 AV			1.51 V	60	54.7	43.2
3	12350.00	59.3 PK	74.0	-14.7	2.51 V	175	39.2	20.1
4	12350.00	46.1 AV	54.0	-7.9	2.51 V	175	26.0	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93：6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.8 PK			3.55 H	62	60.5	44.3
2	*6415.00	93.6 AV			3.55 H	62	49.3	44.3
3	#12830.00	60.0 PK	88.2	-28.2	1.45 H	32	39.0	21.0
4	#12830.00	46.7 AV	68.2	-21.5	1.45 H	32	25.7	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.5 PK			1.84 V	61	65.2	44.3
2	*6415.00	97.9 AV			1.84 V	61	53.6	44.3
3	#12830.00	60.3 PK	88.2	-27.9	2.48 V	177	39.3	21.0
4	#12830.00	47.1 AV	68.2	-21.1	2.48 V	177	26.1	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	**Channel**	CH 97：6435 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6435.00	104.8 PK			3.58 H	66	60.3	44.5
2	*6435.00	93.6 AV			3.58 H	66	49.1	44.5
3	#12870.00	60.0 PK	88.2	-28.2	1.45 H	38	38.8	21.2
4	#12870.00	46.9 AV	68.2	-21.3	1.45 H	38	25.7	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6435.00	109.5 PK			1.43 V	6	65.0	44.5
2	*6435.00	98.0 AV			1.43 V	6	53.5	44.5
3	#12870.00	60.4 PK	88.2	-27.8	2.45 V	172	39.2	21.2
4	#12870.00	47.2 AV	68.2	-21.0	2.45 V	172	26.0	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	**Channel**	CH 105：6475 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6475.00	104.9 PK			3.52 H	60	60.2	44.7
2	*6475.00	93.9 AV			3.52 H	60	49.2	44.7
3	#12950.00	59.9 PK	88.2	-28.3	1.45 H	32	38.7	21.2
4	#12950.00	46.9 AV	68.2	-21.3	1.45 H	32	25.7	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6475.00	109.2 PK			1.48 V	14	64.5	44.7
2	*6475.00	98.2 AV			1.48 V	14	53.5	44.7
3	#12950.00	60.3 PK	88.2	-27.9	2.42 V	170	39.1	21.2
4	#12950.00	47.3 AV	68.2	-20.9	2.42 V	170	26.1	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	**Channel**	CH 113：6515 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6515.00	104.7 PK			3.52 H	62	59.7	45.0
2	*6515.00	93.7 AV			3.52 H	62	48.7	45.0
3	#13030.00	60.0 PK	88.2	-28.2	1.42 H	33	38.8	21.2
4	#13030.00	46.9 AV	68.2	-21.3	1.42 H	33	25.7	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6515.00	109.2 PK			1.49 V	11	64.2	45.0
2	*6515.00	98.0 AV			1.49 V	11	53.0	45.0
3	#13030.00	60.4 PK	88.2	-27.8	2.42 V	176	39.2	21.2
4	#13030.00	47.2 AV	68.2	-21.0	2.42 V	176	26.0	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	**Channel**	CH 117：6535 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6535.00	105.6 PK			3.50 H	62	60.5	45.1
2	*6535.00	94.6 AV			3.50 H	62	49.5	45.1
3	#13070.00	60.2 PK	88.2	-28.0	1.49 H	40	38.8	21.4
4	#13070.00	47.2 AV	68.2	-21.0	1.49 H	40	25.8	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6535.00	110.5 PK			1.45 V	50	65.4	45.1
2	*6535.00	98.5 AV			1.45 V	50	53.4	45.1
3	#13070.00	60.6 PK	88.2	-27.6	2.45 V	175	39.2	21.4
4	#13070.00	47.5 AV	68.2	-20.7	2.45 V	175	26.1	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	**Channel**	CH 149：6695 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6695.00	105.0 PK			3.59 H	60	60.0	45.0
2	*6695.00	93.8 AV			3.59 H	60	48.8	45.0
3	13390.00	60.8 PK	74.0	-13.2	1.45 H	32	38.7	22.1
4	13390.00	47.8 AV	54.0	-6.2	1.45 H	32	25.7	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6695.00	109.5 PK			1.49 V	43	64.5	45.0
2	*6695.00	98.1 AV			1.49 V	43	53.1	45.0
3	13390.00	61.1 PK	74.0	-12.9	2.46 V	170	39.0	22.1
4	**13390.00**	**48.1 AV**	**54.0**	**-5.9**	**2.46 V**	**170**	**26.0**	**22.1**

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	**Channel**	CH 181：6855 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6855.00	105.0 PK			3.56 H	62	59.5	45.5
2	*6855.00	93.7 AV			3.56 H	62	48.2	45.5
3	#13710.00	61.8 PK	88.2	-26.4	1.39 H	42	39.0	22.8
4	#13710.00	48.6 AV	68.2	-19.6	1.39 H	42	25.8	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6855.00	109.5 PK			1.70 V	343	64.0	45.5
2	*6855.00	98.1 AV			1.70 V	343	52.6	45.5
3	#13710.00	62.1 PK	88.2	-26.1	2.49 V	169	39.3	22.8
4	#13710.00	48.9 AV	68.2	-19.3	2.49 V	169	26.1	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	**Channel**	CH 185：6875 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6875.00	104.8 PK			3.55 H	62	59.2	45.6
2	*6875.00	93.4 AV			3.55 H	62	47.8	45.6
3	#13750.00	61.8 PK	88.2	-26.4	1.45 H	38	38.7	23.1
4	#13750.00	48.9 AV	68.2	-19.3	1.45 H	38	25.8	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6875.00	109.1 PK			1.70 V	342	63.5	45.6
2	*6875.00	97.6 AV			1.70 V	342	52.0	45.6
3	#13750.00	62.2 PK	88.2	-26.0	2.49 V	166	39.1	23.1
4	#13750.00	49.1 AV	68.2	-19.1	2.49 V	166	26.0	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	**Channel**	CH 209：6995 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6995.00	104.5 PK			3.55 H	62	58.0	46.5
2	*6995.00	93.0 AV			3.55 H	62	46.5	46.5
3	#13990.00	62.5 PK	88.2	-25.7	1.45 H	45	38.7	23.8
4	#13990.00	49.6 AV	68.2	-18.6	1.45 H	45	25.8	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6995.00	109.0 PK			1.44 V	41	62.5	46.5
2	*6995.00	97.3 AV			1.44 V	41	50.8	46.5
3	#13990.00	62.8 PK	88.2	-25.4	2.45 V	167	39.0	23.8
4	#13990.00	49.9 AV	68.2	-18.3	2.45 V	167	26.1	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233：7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.8 PK			3.52 H	63	56.3	47.5
2	*7115.00	92.4 AV			3.52 H	63	44.9	47.5
3	#7125.00	63.4 PK	88.2	-24.8	3.52 H	63	47.8	15.6
4	#7125.00	52.8 AV	68.2	-15.4	3.52 H	63	37.2	15.6
5	#14230.00	62.6 PK	88.2	-25.6	1.47 H	33	38.5	24.1
6	#14230.00	49.8 AV	68.2	-18.4	1.47 H	33	25.7	24.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	108.4 PK			2.49 V	61	60.9	47.5
2	*7115.00	95.8 AV			2.49 V	61	48.3	47.5
3	#7125.00	69.6 PK	88.2	-18.6	2.49 V	61	54.0	15.6
4	#7125.00	59.0 AV	68.2	-9.2	2.49 V	61	43.4	15.6
5	#14230.00	63.5 PK	88.2	-24.7	2.59 V	177	39.4	24.1
6	#14230.00	50.2 AV	68.2	-18.0	2.59 V	177	26.1	24.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3：5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.7 PK	88.2	-38.5	3.51 H	62	37.4	12.3
2	#5925.00	37.2 AV	68.2	-31.0	3.51 H	62	24.9	12.3
3	*5965.00	103.6 PK			3.51 H	62	60.7	42.9
4	*5965.00	90.7 AV			3.51 H	62	47.8	42.9
5	11930.00	58.4 PK	74.0	-15.6	1.44 H	42	38.8	19.6
6	11930.00	45.2 AV	54.0	-8.8	1.44 H	42	25.6	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.2 PK	88.2	-38.0	1.77 V	63	37.9	12.3
2	#5925.00	37.9 AV	68.2	-30.3	1.77 V	63	25.6	12.3
3	*5965.00	110.6 PK			1.77 V	63	67.7	42.9
4	*5965.00	97.7 AV			1.77 V	63	54.8	42.9
5	11930.00	58.8 PK	74.0	-15.2	2.48 V	177	39.2	19.6
6	11930.00	45.8 AV	54.0	-8.2	2.48 V	177	26.2	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	**Channel**	CH 43：6165 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6165.00	105.6 PK			3.59 H	67	62.5	43.1
2	*6165.00	93.4 AV			3.59 H	67	50.3	43.1
3	12330.00	58.8 PK	74.0	-15.2	1.35 H	32	38.8	20.0
4	12330.00	45.6 AV	54.0	-8.4	1.35 H	32	25.6	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6165.00	110.4 PK			1.40 V	58	67.3	43.1
2	*6165.00	97.9 AV			1.40 V	58	54.8	43.1
3	12330.00	59.0 PK	74.0	-15.0	2.45 V	172	39.0	20.0
4	12330.00	45.9 AV	54.0	-8.1	2.45 V	172	25.9	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91：6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	104.5 PK			3.52 H	62	60.2	44.3
2	*6405.00	92.5 AV			3.52 H	62	48.2	44.3
3	#12810.00	59.6 PK	88.2	-28.6	1.26 H	39	38.6	21.0
4	#12810.00	46.6 AV	68.2	-21.6	1.26 H	39	25.6	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	109.0 PK			1.56 V	6	64.7	44.3
2	*6405.00	97.0 AV			1.56 V	6	52.7	44.3
3	#12810.00	59.8 PK	88.2	-28.4	2.45 V	171	38.8	21.0
4	#12810.00	46.8 AV	68.2	-21.4	2.45 V	171	25.8	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99：6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	104.9 PK			3.52 H	62	60.3	44.6
2	*6445.00	92.9 AV			3.52 H	62	48.3	44.6
3	#12890.00	60.0 PK	88.2	-28.2	1.45 H	36	38.7	21.3
4	#12890.00	47.1 AV	68.2	-21.1	1.45 H	36	25.8	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.1 PK			1.58 V	62	64.5	44.6
2	*6445.00	97.4 AV			1.58 V	62	52.8	44.6
3	#12890.00	60.2 PK	88.2	-28.0	2.44 V	170	38.9	21.3
4	#12890.00	47.3 AV	68.2	-20.9	2.44 V	170	26.0	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107：6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	104.3 PK			3.52 H	62	59.5	44.8
2	*6485.00	93.1 AV			3.52 H	62	48.3	44.8
3	#12970.00	59.9 PK	88.2	-28.3	1.55 H	42	38.7	21.2
4	#12970.00	47.0 AV	68.2	-21.2	1.55 H	42	25.8	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	109.0 PK			1.76 V	56	64.2	44.8
2	*6485.00	97.5 AV			1.76 V	56	52.7	44.8
3	#12970.00	60.2 PK	88.2	-28.0	2.44 V	170	39.0	21.2
4	#12970.00	47.2 AV	68.2	-21.0	2.44 V	170	26.0	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	**Channel**	CH 115：6525 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6525.00	104.2 PK			3.49 H	57	59.2	45.0
2	*6525.00	93.2 AV			3.49 H	57	48.2	45.0
3	#13050.00	60.0 PK	88.2	-28.2	1.45 H	34	38.7	21.3
4	#13050.00	47.0 AV	68.2	-21.2	1.45 H	34	25.7	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6525.00	108.8 PK			1.76 V	47	63.8	45.0
2	*6525.00	97.5 AV			1.76 V	47	52.5	45.0
3	#13050.00	60.3 PK	88.2	-27.9	2.49 V	172	39.0	21.3
4	#13050.00	47.2 AV	68.2	-21.0	2.49 V	172	25.9	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	**Channel**	CH 123：6565 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6565.00	105.4 PK			3.56 H	54	60.3	45.1
2	*6565.00	93.3 AV			3.56 H	54	48.2	45.1
3	#13130.00	60.3 PK	88.2	-27.9	1.43 H	35	38.7	21.6
4	#13130.00	47.4 AV	68.2	-20.8	1.43 H	35	25.8	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6565.00	110.0 PK			1.44 V	14	64.9	45.1
2	*6565.00	97.6 AV			1.44 V	14	52.5	45.1
3	#13130.00	60.5 PK	88.2	-27.7	2.44 V	165	38.9	21.6
4	#13130.00	47.6 AV	68.2	-20.6	2.44 V	165	26.0	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	**Channel**	CH 155：6725 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6725.00	104.9 PK			3.49 H	58	60.0	44.9
2	*6725.00	92.9 AV			3.49 H	58	48.0	44.9
3	#13450.00	60.9 PK	88.2	-27.3	1.42 H	36	38.7	22.2
4	#13450.00	48.0 AV	68.2	-20.2	1.42 H	36	25.8	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6725.00	109.3 PK			1.58 V	46	64.4	44.9
2	*6725.00	97.1 AV			1.58 V	46	52.2	44.9
3	#13450.00	61.2 PK	88.2	-27.0	2.49 V	168	39.0	22.2
4	#13450.00	48.2 AV	68.2	-20.0	2.49 V	168	26.0	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	**Channel**	CH 179：6845 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6845.00	105.6 PK			3.53 H	62	60.2	45.4
2	*6845.00	93.1 AV			3.53 H	62	47.7	45.4
3	#13690.00	61.6 PK	88.2	-26.6	1.39 H	26	38.8	22.8
4	#13690.00	48.6 AV	68.2	-19.6	1.39 H	26	25.8	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6845.00	110.3 PK			1.48 V	43	64.9	45.4
2	*6845.00	97.0 AV			1.48 V	43	51.6	45.4
3	#13690.00	61.8 PK	88.2	-26.4	2.49 V	172	39.0	22.8
4	#13690.00	48.9 AV	68.2	-19.3	2.49 V	172	26.1	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	**Channel**	CH 187：6885 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6885.00	104.6 PK			3.50 H	61	59.0	45.6
2	*6885.00	93.4 AV			3.50 H	61	47.8	45.6
3	#13770.00	62.0 PK	88.2	-26.2	1.42 H	33	38.8	23.2
4	#13770.00	48.8 AV	68.2	-19.4	1.42 H	33	25.6	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6885.00	109.1 PK			1.45 V	63	63.5	45.6
2	*6885.00	97.6 AV			1.45 V	63	52.0	45.6
3	#13770.00	62.2 PK	88.2	-26.0	2.49 V	169	39.0	23.2
4	#13770.00	49.0 AV	68.2	-19.2	2.49 V	169	25.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211：7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	104.5 PK			3.52 H	62	58.0	46.5
2	*7005.00	93.3 AV			3.52 H	62	46.8	46.5
3	#14010.00	62.5 PK	88.2	-25.7	1.48 H	125	38.8	23.7
4	#14010.00	49.4 AV	68.2	-18.8	1.48 H	125	25.7	23.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	109.0 PK			1.48 V	40	62.5	46.5
2	*7005.00	97.0 AV			1.48 V	40	50.5	46.5
3	#14010.00	62.7 PK	88.2	-25.5	2.45 V	145	39.0	23.7
4	#14010.00	49.6 AV	68.2	-18.6	2.45 V	145	25.9	23.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227：7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	101.5 PK			3.45 H	69	54.4	47.1
2	*7085.00	88.8 AV			3.45 H	69	41.7	47.1
3	#7125.00	55.3 PK	88.2	-32.9	3.45 H	69	39.7	15.6
4	#7125.00	42.4 AV	68.2	-25.8	3.45 H	69	26.8	15.6
5	#14170.00	62.8 PK	88.2	-25.4	1.45 H	42	38.8	24.0
6	#14170.00	49.6 AV	68.2	-18.6	1.45 H	42	25.6	24.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.7 PK			2.37 V	64	61.6	47.1
2	*7085.00	95.4 AV			2.37 V	64	48.3	47.1
3	#7125.00	55.9 PK	88.2	-32.3	2.37 V	64	40.3	15.6
4	#7125.00	42.8 AV	68.2	-25.4	2.37 V	64	27.2	15.6
5	#14170.00	63.4 PK	88.2	-24.8	2.58 V	180	39.4	24.0
6	#14170.00	50.2 AV	68.2	-18.0	2.58 V	180	26.2	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7：5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	3.44 H	62	39.7	12.3
2	#5925.00	39.2 AV	68.2	-29.0	3.44 H	62	26.9	12.3
3	*5985.00	103.5 PK			3.44 H	62	60.6	42.9
4	*5985.00	90.9 AV			3.44 H	62	48.0	42.9
5	11970.00	58.2 PK	74.0	-15.8	1.32 H	48	38.5	19.7
6	11970.00	45.1 AV	54.0	-8.9	1.32 H	48	25.4	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.9 PK	88.2	-31.3	1.60 V	66	44.6	12.3
2	#5925.00	43.6 AV	68.2	-24.6	1.60 V	66	31.3	12.3
3	*5985.00	109.5 PK			1.60 V	66	66.6	42.9
4	*5985.00	97.8 AV			1.60 V	66	54.9	42.9
5	11970.00	59.1 PK	74.0	-14.9	2.49 V	177	39.4	19.7
6	11970.00	45.9 AV	54.0	-8.1	2.49 V	177	26.2	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	**Channel**	CH 39：6145 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6145.00	105.3 PK			3.49 H	66	62.2	43.1
2	*6145.00	93.6 AV			3.49 H	66	50.5	43.1
3	12290.00	58.6 PK	74.0	-15.4	1.48 H	50	38.6	20.0
4	12290.00	46.3 AV	54.0	-7.7	1.48 H	50	26.3	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6145.00	110.5 PK			1.66 V	59	67.4	43.1
2	*6145.00	97.9 AV			1.66 V	59	54.8	43.1
3	12290.00	58.8 PK	74.0	-15.2	2.51 V	167	38.8	20.0
4	12290.00	46.7 AV	54.0	-7.3	2.51 V	167	26.7	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	**Channel**	CH 87：6385 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6385.00	104.5 PK			3.52 H	69	60.2	44.3
2	*6385.00	93.0 AV			3.52 H	69	48.7	44.3
3	#12770.00	59.6 PK	88.2	-28.6	1.51 H	42	38.7	20.9
4	#12770.00	46.7 AV	68.2	-21.5	1.51 H	42	25.8	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6385.00	109.1 PK			1.48 V	58	64.8	44.3
2	*6385.00	97.3 AV			1.48 V	58	53.0	44.3
3	#12770.00	59.8 PK	88.2	-28.4	2.55 V	169	38.9	20.9
4	#12770.00	46.9 AV	68.2	-21.3	2.55 V	169	26.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	**Channel**	CH 103：6465 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6465.00	104.7 PK			3.52 H	61	60.0	44.7
2	*6465.00	92.9 AV			3.52 H	61	48.2	44.7
3	#12930.00	60.0 PK	88.2	-28.2	1.45 H	39	38.7	21.3
4	#12930.00	47.1 AV	68.2	-21.1	1.45 H	39	25.8	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6465.00	108.8 PK			1.62 V	11	64.1	44.7
2	*6465.00	97.2 AV			1.62 V	11	52.5	44.7
3	#12930.00	60.3 PK	88.2	-27.9	2.55 V	170	39.0	21.3
4	#12930.00	47.3 AV	68.2	-20.9	2.55 V	170	26.0	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	**Channel**	CH 119：6545 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6545.00	104.6 PK			3.45 H	62	59.5	45.1
2	*6545.00	93.3 AV			3.45 H	62	48.2	45.1
3	#13090.00	60.0 PK	88.2	-28.2	1.49 H	35	38.6	21.4
4	#13090.00	47.1 AV	68.2	-21.1	1.49 H	35	25.7	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6545.00	109.1 PK			1.71 V	47	64.0	45.1
2	*6545.00	97.6 AV			1.71 V	47	52.5	45.1
3	#13090.00	60.2 PK	88.2	-28.0	2.51 V	166	38.8	21.4
4	#13090.00	47.3 AV	68.2	-20.9	2.51 V	166	25.9	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	**Channel**	CH 151：6705 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6705.00	104.5 PK			3.46 H	59	59.5	45.0
2	*6705.00	93.0 AV			3.46 H	59	48.0	45.0
3	#13410.00	60.8 PK	88.2	-27.4	1.49 H	32	38.7	22.1
4	#13410.00	47.7 AV	68.2	-20.5	1.49 H	32	25.6	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6705.00	109.0 PK			1.46 V	46	64.0	45.0
2	*6705.00	97.0 AV			1.46 V	46	52.0	45.0
3	#13410.00	61.1 PK	88.2	-27.1	2.44 V	175	39.0	22.1
4	#13410.00	47.9 AV	68.2	-20.3	2.44 V	175	25.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	**Channel**	CH 183：6865 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6865.00	104.5 PK			3.50 H	69	59.0	45.5
2	*6865.00	93.0 AV			3.50 H	69	47.5	45.5
3	#13730.00	61.5 PK	88.2	-26.7	1.41 H	26	38.5	23.0
4	#13730.00	48.8 AV	68.2	-19.4	1.41 H	26	25.8	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6865.00	108.9 PK			1.63 V	44	63.4	45.5
2	*6865.00	97.3 AV			1.63 V	44	51.8	45.5
3	#13730.00	62.0 PK	88.2	-26.2	2.52 V	170	39.0	23.0
4	#13730.00	48.9 AV	68.2	-19.3	2.52 V	170	25.9	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199：6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	105.3 PK			3.52 H	63	59.0	46.3
2	*6945.00	92.6 AV			3.52 H	63	46.3	46.3
3	#13890.00	62.4 PK	88.2	-25.8	1.45 H	45	38.7	23.7
4	#13890.00	49.4 AV	68.2	-18.8	1.45 H	45	25.7	23.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.5 PK			1.50 V	41	63.2	46.3
2	*6945.00	97.1 AV			1.50 V	41	50.8	46.3
3	#13890.00	62.6 PK	88.2	-25.6	2.48 V	166	38.9	23.7
4	#13890.00	49.6 AV	68.2	-18.6	2.48 V	166	25.9	23.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215：7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.2 PK			3.44 H	68	55.7	46.5
2	*7025.00	89.1 AV			3.44 H	68	42.6	46.5
3	#7125.00	55.0 PK	88.2	-33.2	3.44 H	68	39.4	15.6
4	#7125.00	41.3 AV	68.2	-26.9	3.44 H	68	25.7	15.6
5	#14050.00	62.4 PK	88.2	-25.8	1.31 H	56	38.7	23.7
6	#14050.00	49.1 AV	68.2	-19.1	1.31 H	56	25.4	23.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.8 PK			2.24 V	66	62.3	46.5
2	*7025.00	95.8 AV			2.24 V	66	49.3	46.5
3	#7125.00	55.5 PK	88.2	-32.7	2.24 V	66	39.9	15.6
4	#7125.00	42.1 AV	68.2	-26.1	2.24 V	66	26.5	15.6
5	#14050.00	63.1 PK	88.2	-25.1	2.58 V	177	39.4	23.7
6	#14050.00	49.9 AV	68.2	-18.3	2.58 V	177	26.2	23.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15：6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.5 PK	88.2	-34.7	3.53 H	66	41.2	12.3
2	#5925.00	40.5 AV	68.2	-27.7	3.53 H	66	28.2	12.3
3	*6025.00	102.9 PK			3.53 H	66	60.0	42.9
4	*6025.00	90.5 AV			3.53 H	66	47.6	42.9
5	12050.00	58.4 PK	74.0	-15.6	1.46 H	41	38.7	19.7
6	12050.00	44.9 AV	54.0	-9.1	1.46 H	41	25.2	19.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.7 PK	88.2	-29.5	1.49 V	63	46.4	12.3
2	#5925.00	45.2 AV	68.2	-23.0	1.49 V	63	32.9	12.3
3	*6025.00	110.7 PK			1.49 V	63	67.8	42.9
4	*6025.00	97.3 AV			1.49 V	63	54.4	42.9
5	12050.00	59.2 PK	74.0	-14.8	2.53 V	189	39.5	19.7
6	12050.00	46.1 AV	54.0	-7.9	2.53 V	189	26.4	19.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47：6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.7 PK			3.55 H	63	62.5	43.2
2	*6185.00	93.4 AV			3.55 H	63	50.2	43.2
3	12370.00	58.8 PK	74.0	-15.2	1.23 H	55	38.8	20.0
4	12370.00	45.7 AV	54.0	-8.3	1.23 H	55	25.7	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.2 PK			1.59 V	59	67.0	43.2
2	*6185.00	98.2 AV			1.59 V	59	55.0	43.2
3	12370.00	59.0 PK	74.0	-15.0	2.55 V	169	39.0	20.0
4	12370.00	45.9 AV	54.0	-8.1	2.55 V	169	25.9	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	**Channel**	CH 79：6345 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6345.00	105.4 PK			3.45 H	66	61.2	44.2
2	*6345.00	94.2 AV			3.45 H	66	50.0	44.2
3	12690.00	59.5 PK	74.0	-14.5	1.51 H	133	38.6	20.9
4	12690.00	46.6 AV	54.0	-7.4	1.51 H	133	25.7	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6345.00	110.2 PK			1.67 V	57	66.0	44.2
2	*6345.00	98.3 AV			1.67 V	57	54.1	44.2
3	12690.00	59.7 PK	74.0	-14.3	2.52 V	164	38.8	20.9
4	12690.00	46.9 AV	54.0	-7.1	2.52 V	164	26.0	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	**Channel**	CH 111：6505 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6505.00	105.3 PK			3.53 H	63	60.3	45.0
2	*6505.00	94.0 AV			3.53 H	63	49.0	45.0
3	#13010.00	59.9 PK	88.2	-28.3	1.51 H	123	38.7	21.2
4	#13010.00	47.0 AV	68.2	-21.2	1.51 H	123	25.8	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6505.00	110.0 PK			1.47 V	48	65.0	45.0
2	*6505.00	98.2 AV			1.47 V	48	53.2	45.0
3	#13010.00	60.1 PK	88.2	-28.1	2.49 V	170	38.9	21.2
4	#13010.00	47.2 AV	68.2	-21.0	2.49 V	170	26.0	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	**Channel**	CH 143：6665 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6665.00	105.1 PK			3.52 H	62	60.1	45.0
2	*6665.00	93.2 AV			3.52 H	62	48.2	45.0
3	13330.00	60.4 PK	74.0	-13.6	1.48 H	129	38.6	21.8
4	13330.00	47.4 AV	54.0	-6.6	1.48 H	129	25.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6665.00	109.5 PK			1.88 V	49	64.5	45.0
2	*6665.00	97.6 AV			1.88 V	49	52.6	45.0
3	13330.00	60.6 PK	74.0	-13.4	2.50 V	164	38.8	21.8
4	13330.00	47.6 AV	54.0	-6.4	2.50 V	164	25.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	**Channel**	CH 175：6825 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6825.00	104.3 PK			3.58 H	62	59.0	45.3
2	*6825.00	93.4 AV			3.58 H	62	48.1	45.3
3	#13650.00	61.5 PK	88.2	-26.7	1.41 H	119	38.7	22.8
4	#13650.00	48.6 AV	68.2	-19.6	1.41 H	119	25.8	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6825.00	108.8 PK			1.59 V	46	63.5	45.3
2	*6825.00	97.6 AV			1.59 V	46	52.3	45.3
3	#13650.00	61.7 PK	88.2	-26.5	2.48 V	162	38.9	22.8
4	#13650.00	48.8 AV	68.2	-19.4	2.48 V	162	26.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207：6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.4 PK			3.50 H	62	57.9	46.5
2	*6985.00	90.1 AV			3.50 H	62	43.6	46.5
3	#7125.00	53.7 PK	88.2	-34.5	3.50 H	62	38.1	15.6
4	#7125.00	43.0 AV	68.2	-25.2	3.50 H	62	27.4	15.6
5	#13970.00	62.3 PK	88.2	-25.9	1.31 H	42	38.6	23.7
6	#13970.00	49.3 AV	68.2	-18.9	1.31 H	42	25.6	23.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.0 PK			2.23 V	64	63.5	46.5
2	*6985.00	96.3 AV			2.23 V	64	49.8	46.5
3	#7125.00	59.8 PK	88.2	-28.4	2.23 V	64	44.2	15.6
4	#7125.00	44.4 AV	68.2	-23.8	2.23 V	64	28.8	15.6
5	#13970.00	62.8 PK	88.2	-25.4	2.46 V	174	39.1	23.7
6	#13970.00	50.2 AV	68.2	-18.0	2.46 V	174	26.5	23.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31：6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.8 PK	88.2	-28.4	1.97 H	33	47.5	12.3
2	#5925.00	46.7 AV	68.2	-21.5	1.97 H	33	34.4	12.3
3	*6105.00	103.3 PK			1.97 H	33	60.3	43.0
4	*6105.00	92.5 AV			1.97 H	33	49.5	43.0
5	12210.00	58.6 PK	74.0	-15.4	1.45 H	35	38.7	19.9
6	12210.00	45.7 AV	54.0	-8.3	1.45 H	35	25.8	19.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.5 PK	88.2	-23.7	1.73 V	59	52.2	12.3
2	#5925.00	52.1 AV	68.2	-16.1	1.73 V	59	39.8	12.3
3	*6105.00	108.4 PK			1.73 V	59	65.4	43.0
4	*6105.00	98.3 AV			1.73 V	59	55.3	43.0
5	12210.00	58.9 PK	74.0	-15.1	2.55 V	180	39.0	19.9
6	12210.00	46.0 AV	54.0	-8.0	2.55 V	180	26.1	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63：6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	104.9 PK			3.48 H	55	61.2	43.7
2	*6265.00	93.7 AV			3.48 H	55	50.0	43.7
3	12530.00	59.1 PK	74.0	-14.9	1.55 H	123	38.8	20.3
4	12530.00	46.0 AV	54.0	-8.0	1.55 H	123	25.7	20.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	109.2 PK			1.81 V	60	65.5	43.7
2	*6265.00	98.0 AV			1.81 V	60	54.3	43.7
3	12530.00	59.3 PK	74.0	-14.7	2.51 V	162	39.0	20.3
4	12530.00	46.2 AV	54.0	-7.8	2.51 V	162	25.9	20.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	**Channel**	CH 95：6425 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6425.00	104.9 PK			3.42 H	57	60.5	44.4
2	*6425.00	93.9 AV			3.42 H	57	49.5	44.4
3	#12850.00	58.8 PK	88.2	-29.4	1.59 H	121	37.6	21.2
4	#12850.00	46.6 AV	68.2	-21.6	1.59 H	121	25.4	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6425.00	109.4 PK			1.88 V	62	65.0	44.4
2	*6425.00	98.1 AV			1.88 V	62	53.7	44.4
3	#12850.00	60.0 PK	88.2	-28.2	2.56 V	166	38.8	21.2
4	#12850.00	46.9 AV	68.2	-21.3	2.56 V	166	25.7	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	**Channel**	CH 127：6585 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6585.00	104.5 PK			3.52 H	61	59.5	45.0
2	*6585.00	93.3 AV			3.52 H	61	48.3	45.0
3	#13170.00	60.1 PK	88.2	-28.1	1.48 H	122	38.6	21.5
4	#13170.00	47.0 AV	68.2	-21.2	1.48 H	122	25.5	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6585.00	108.8 PK			1.84 V	48	63.8	45.0
2	*6585.00	97.9 AV			1.84 V	48	52.9	45.0
3	#13170.00	60.3 PK	88.2	-27.9	2.45 V	170	38.8	21.5
4	#13170.00	47.3 AV	68.2	-20.9	2.45 V	170	25.8	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	**Channel**	CH 159：6745 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6745.00	105.1 PK			3.45 H	58	60.2	44.9
2	*6745.00	93.2 AV			3.45 H	58	48.3	44.9
3	#13490.00	61.0 PK	88.2	-27.2	1.42 H	122	38.8	22.2
4	#13490.00	47.9 AV	68.2	-20.3	1.42 H	122	25.7	22.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	*6745.00	109.4 PK			1.46 V	45	64.5	44.9
2	*6745.00	97.5 AV			1.46 V	45	52.6	44.9
3	#13490.00	61.2 PK	88.2	-27.0	2.45 V	171	39.0	22.2
4	#13490.00	48.1 AV	68.2	-20.1	2.45 V	171	25.9	22.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191：6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.3 PK			1.74 H	45	59.5	45.8
2	*6905.00	93.5 AV			1.74 H	45	47.7	45.8
3	#7125.00	57.4 PK	88.2	-30.8	1.74 H	45	41.8	15.6
4	#7125.00	44.1 AV	68.2	-24.1	1.74 H	45	28.5	15.6
5	#13810.00	62.1 PK	88.2	-26.1	1.48 H	125	38.7	23.4
6	#13810.00	49.1 AV	68.2	-19.1	1.48 H	125	25.7	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	109.8 PK			1.65 V	42	64.0	45.8
2	*6905.00	97.4 AV			1.65 V	42	51.6	45.8
3	#7125.00	61.8 PK	88.2	-26.4	1.65 V	42	46.2	15.6
4	#7125.00	47.8 AV	68.2	-20.4	1.65 V	42	32.2	15.6
5	#13810.00	62.3 PK	88.2	-25.9	2.59 V	187	38.9	23.4
6	#13810.00	49.3 AV	68.2	-18.9	2.59 V	187	25.9	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak

802.11a Channel 1

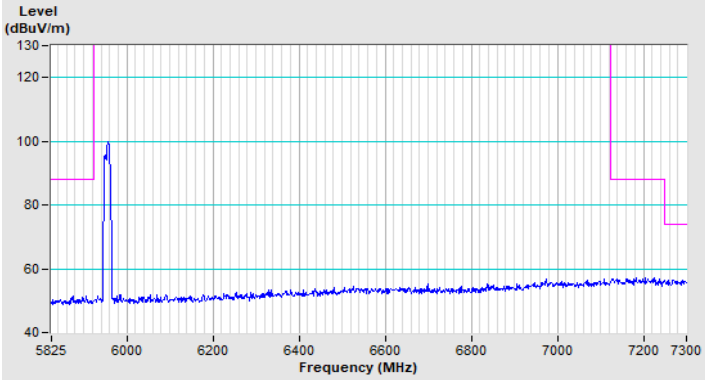

Horizontal (Peak)

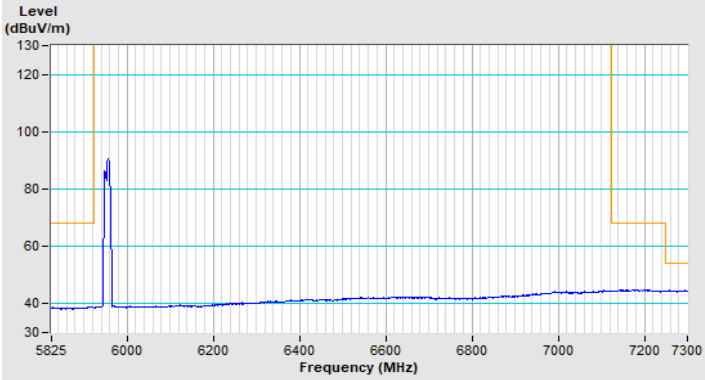

Horizontal (Average)

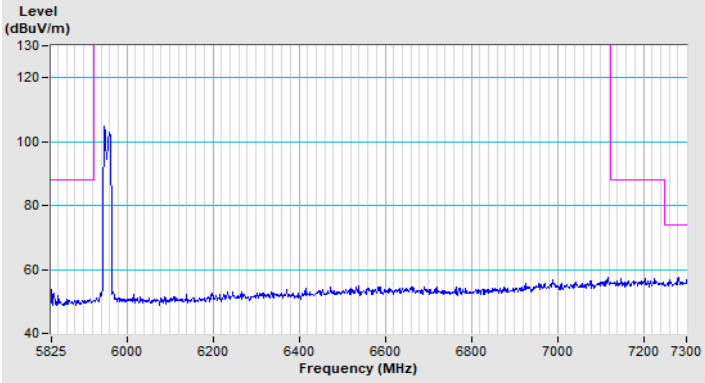

Vertical (Peak)

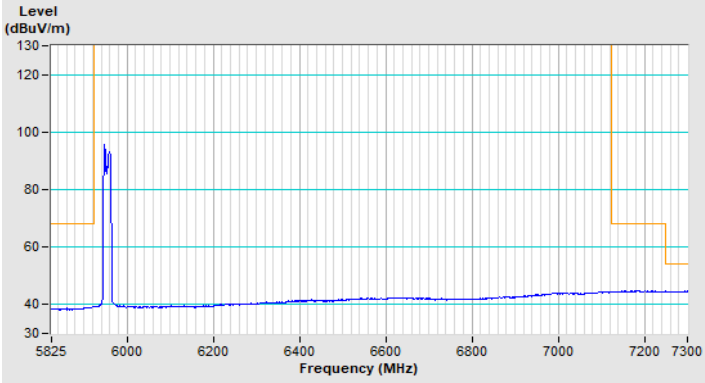

Vertical (Average)

802.11a Channel 233

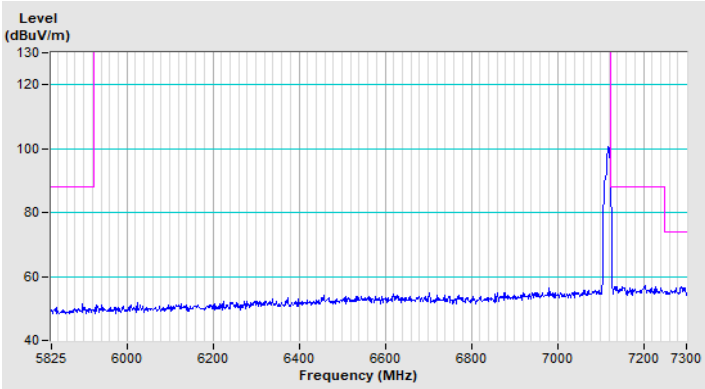

Horizontal (Peak)

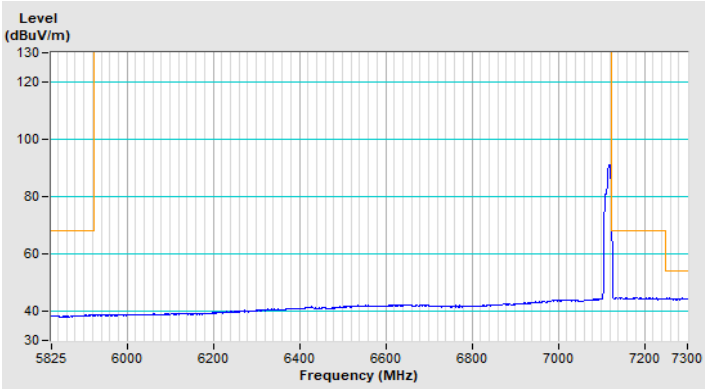

Horizontal (Average)

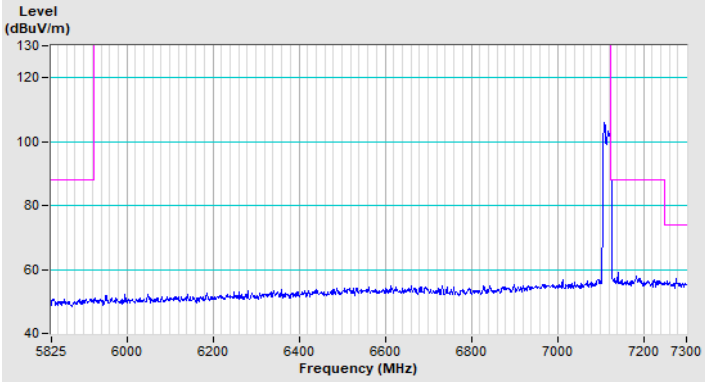

Vertical (Peak)

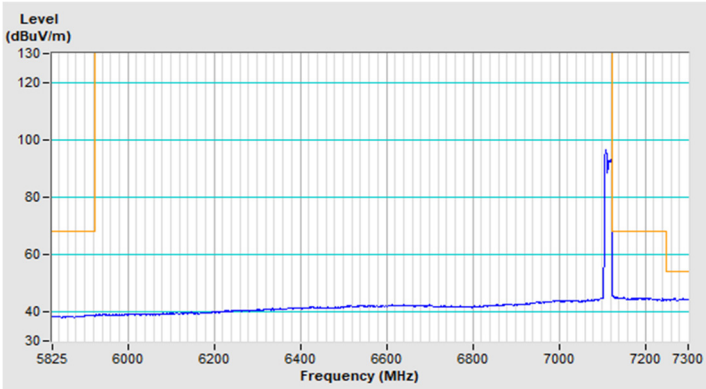

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak

802.11be (EHT20) Channel 1

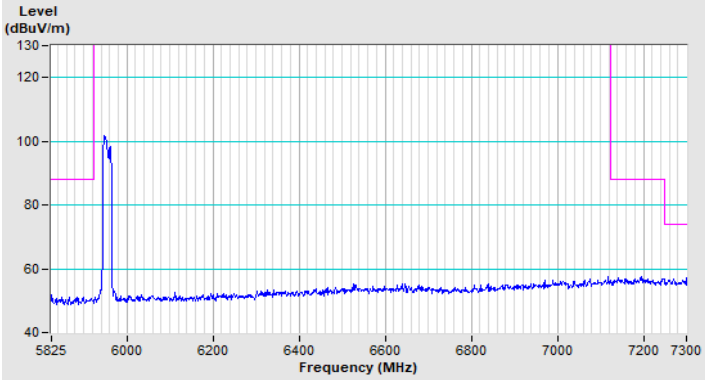

Horizontal (Peak)

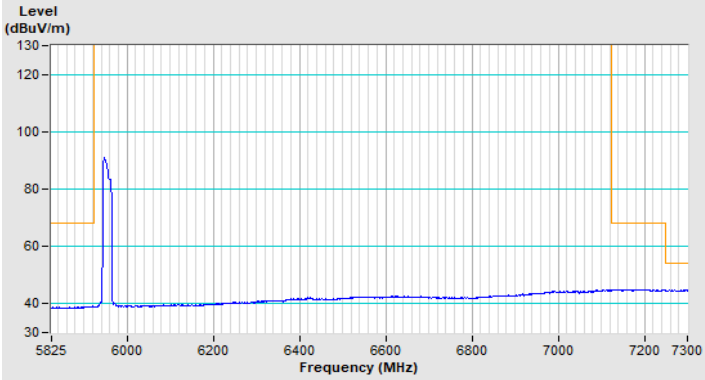

Horizontal (Average)

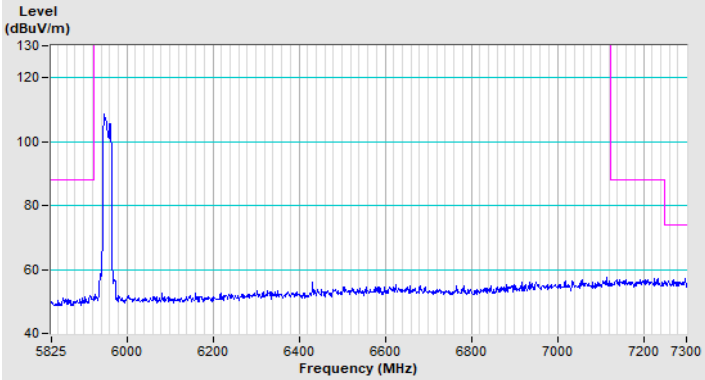

Vertical (Peak)

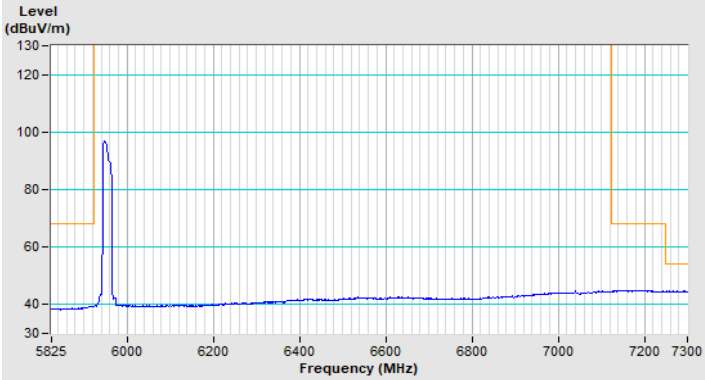

Vertical (Average)

802.11be (EHT20) Channel 233

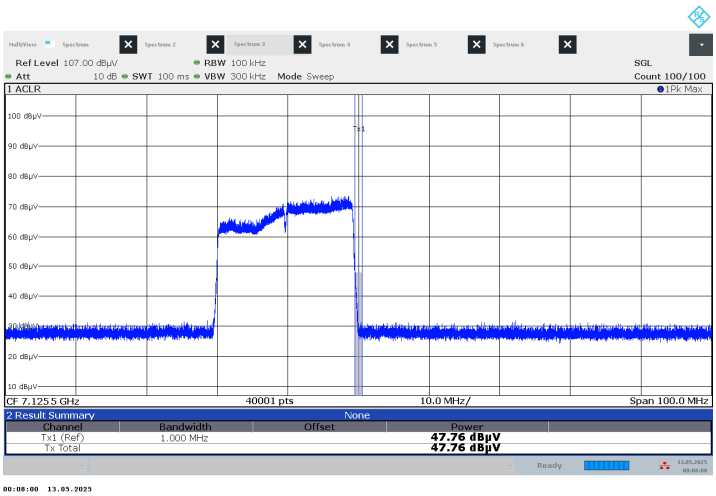

Horizontal (Peak)

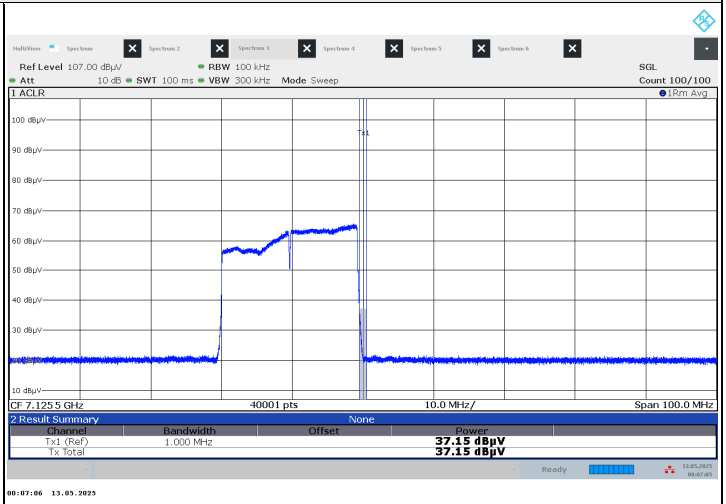

Horizontal (Average)

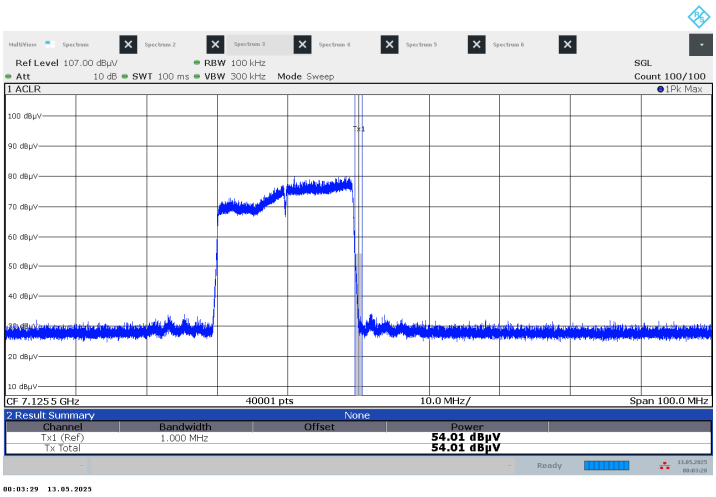

Vertical (Peak)

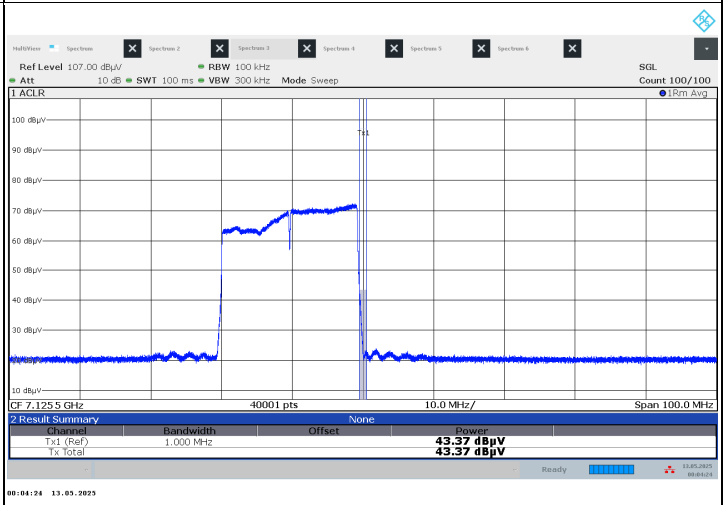

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak

802.11be (EHT40) Channel 3

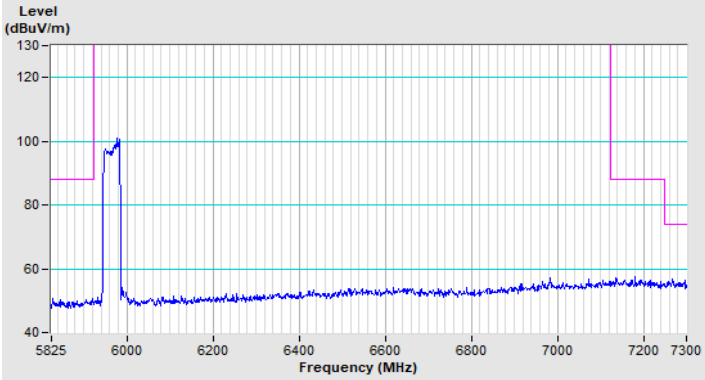

Horizontal (Peak)

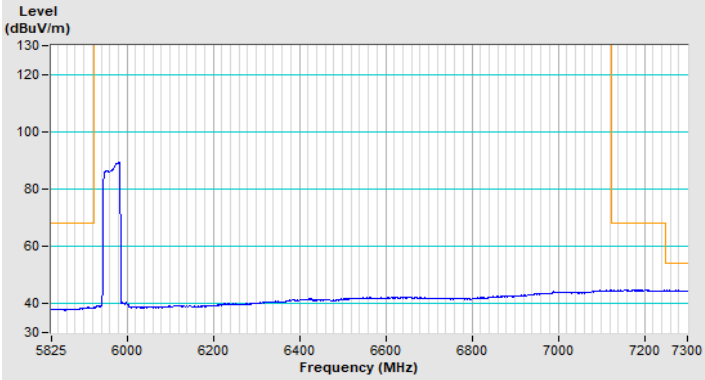

Horizontal (Average)

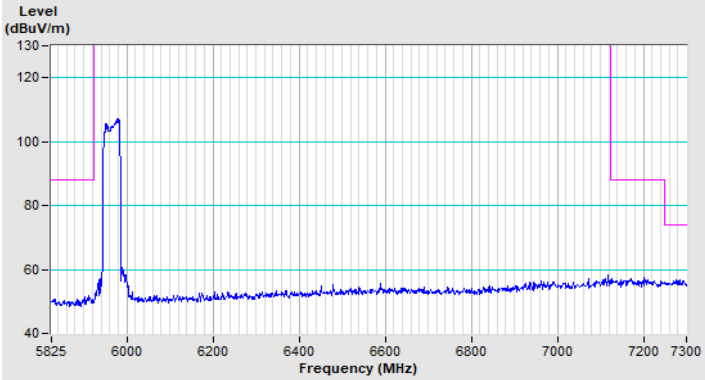

Vertical (Peak)

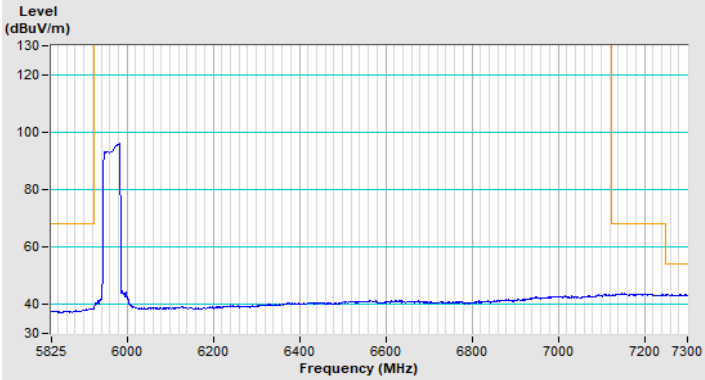

Vertical (Average)

802.11be (EHT40) Channel 227

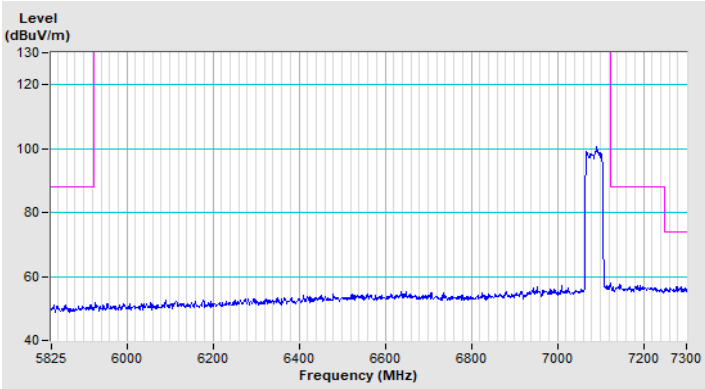

Horizontal (Peak)

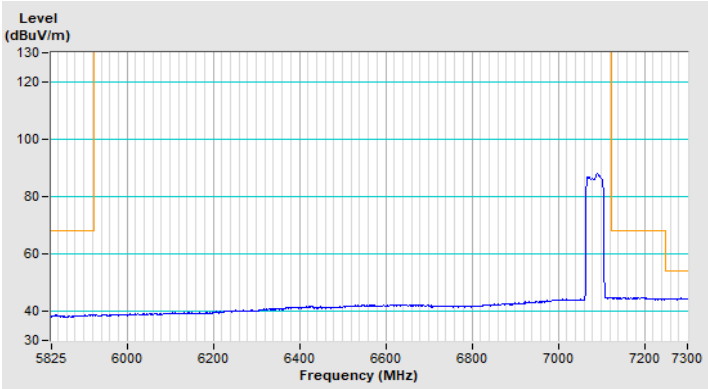

Horizontal (Average)

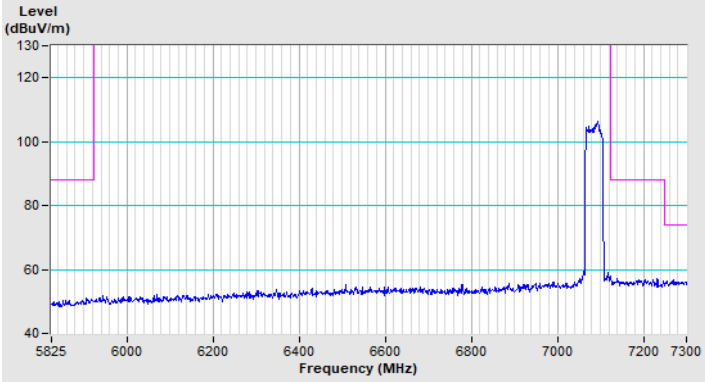

Vertical (Peak)

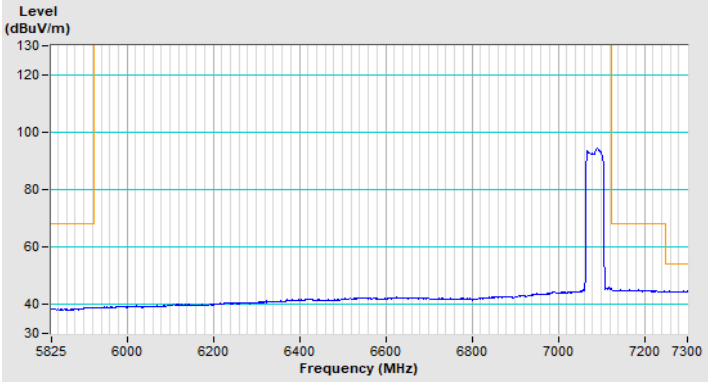

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak

802.11be (EHT80) Channel 7

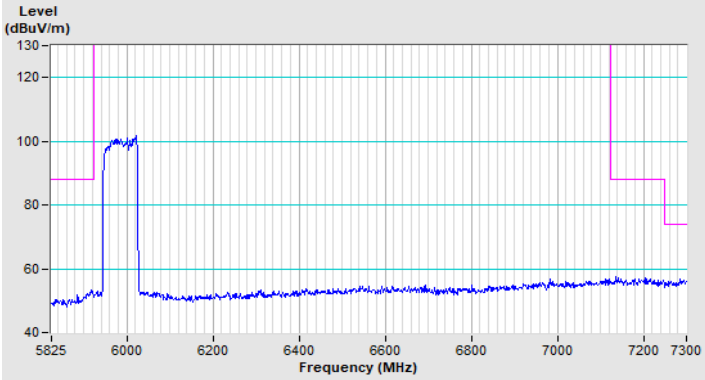

Horizontal (Peak)

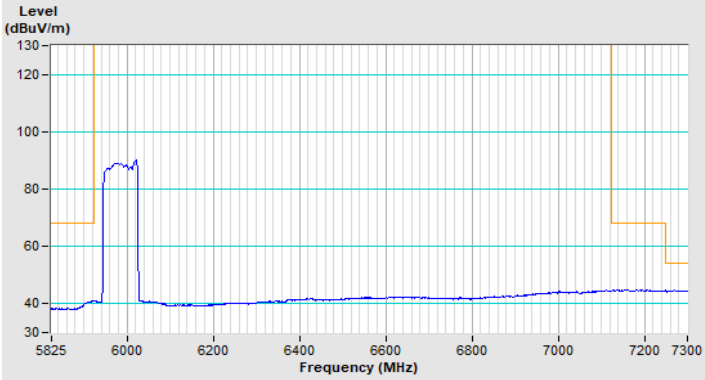

Horizontal (Average)

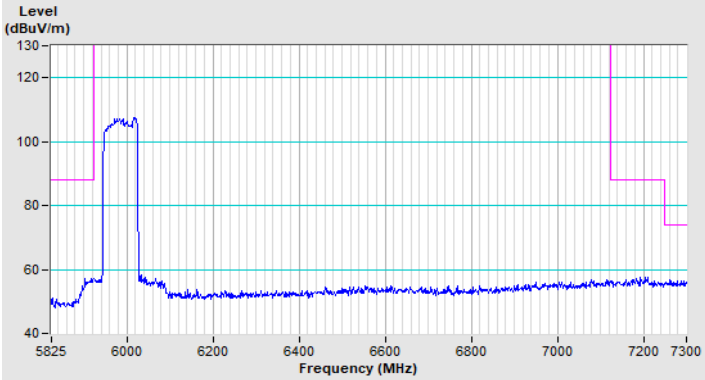

Vertical (Peak)

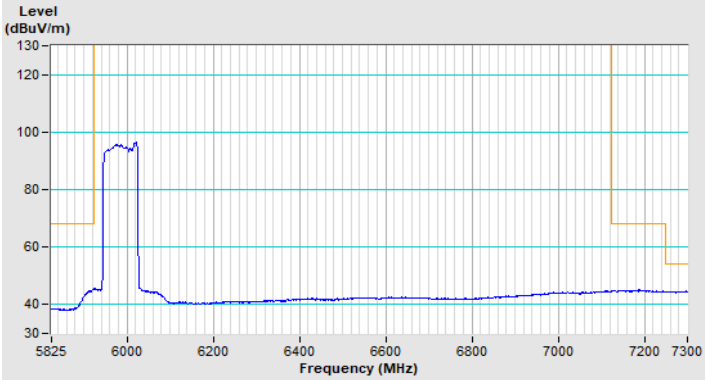

Vertical (Average)

802.11be (EHT80) Channel 215

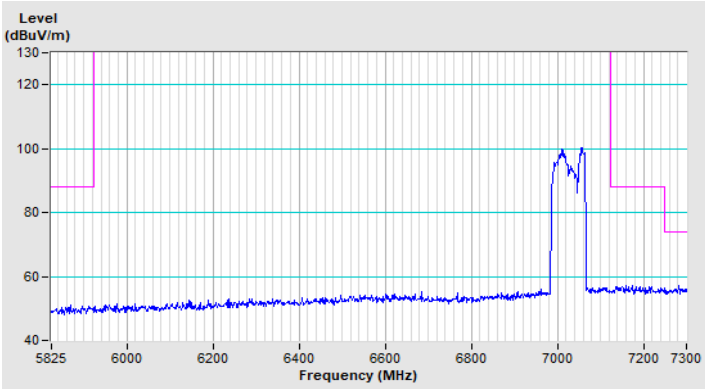

Horizontal (Peak)

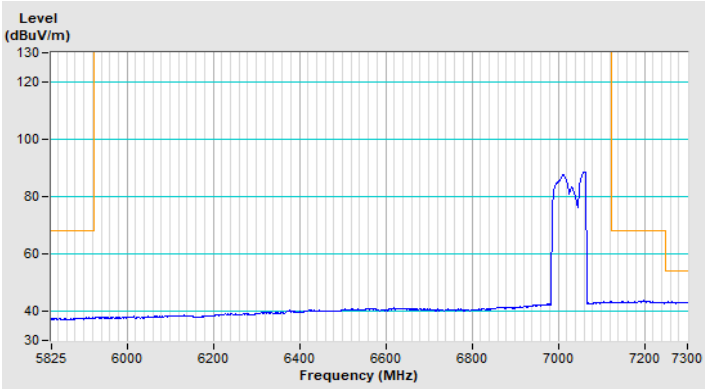

Horizontal (Average)

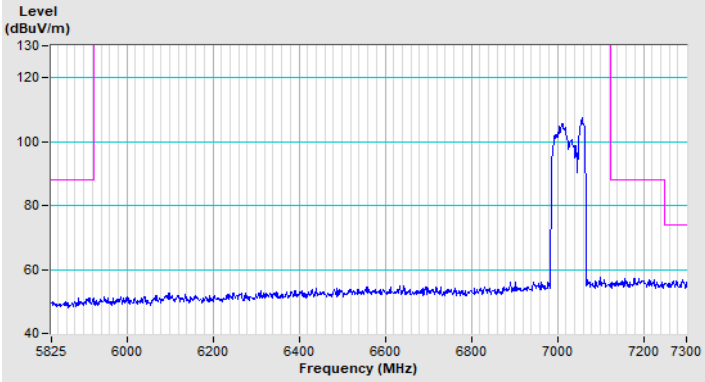

Vertical (Peak)

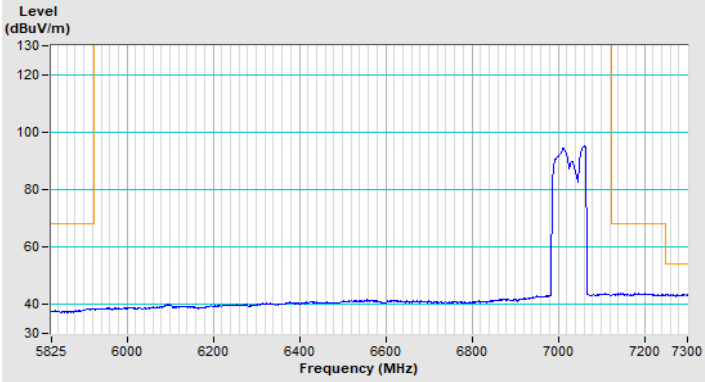

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak

802.11be (EHT160) Channel 15

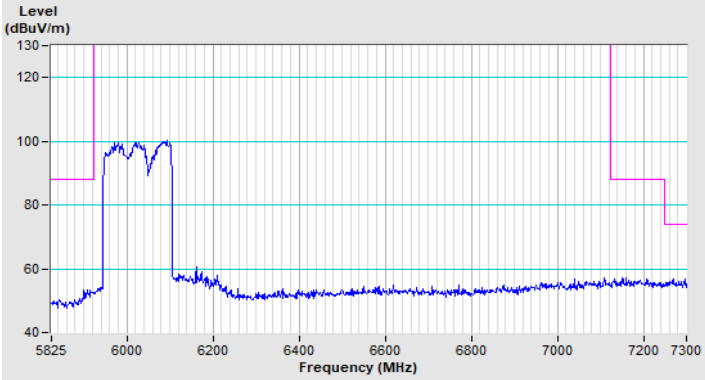

Horizontal (Peak)

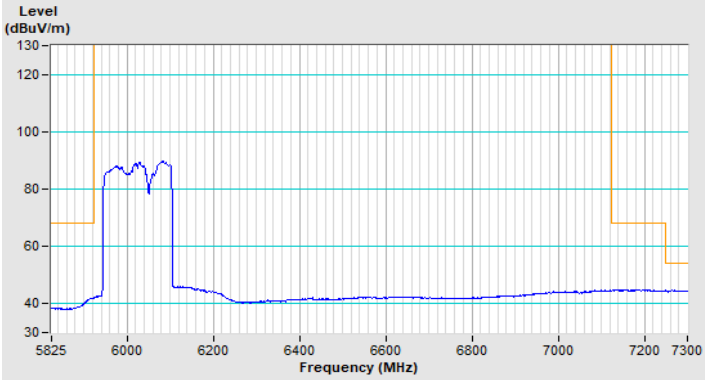

Horizontal (Average)

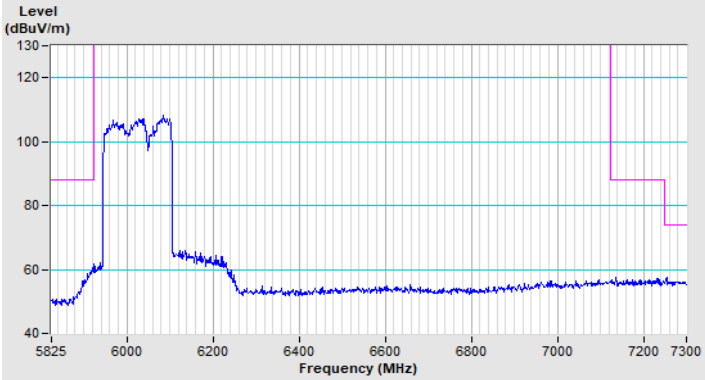

Vertical (Peak)

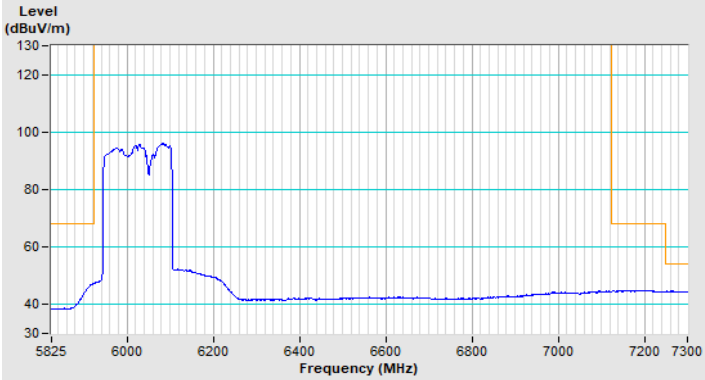

Vertical (Average)

802.11be (EHT160) Channel 207

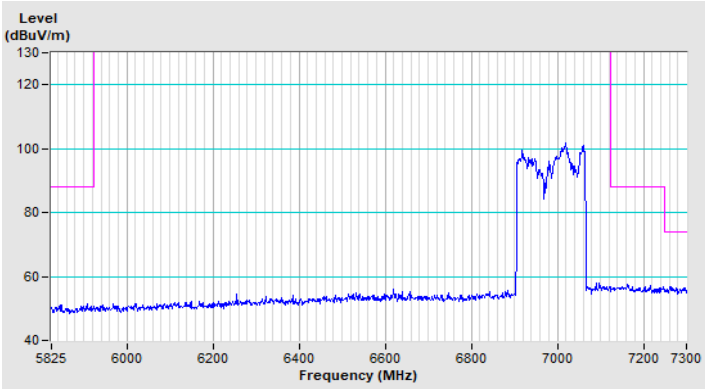

Horizontal (Peak)

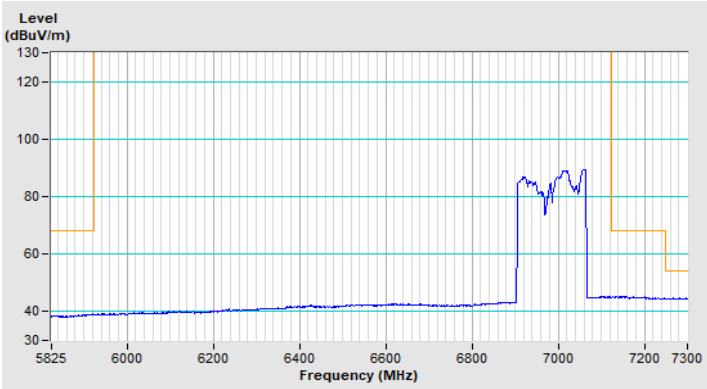

Horizontal (Average)

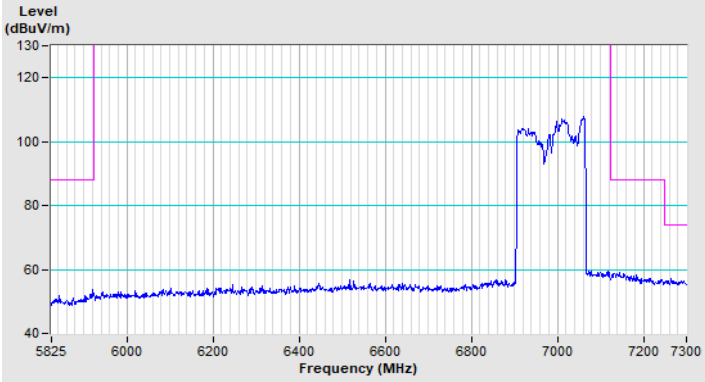

Vertical (Peak)

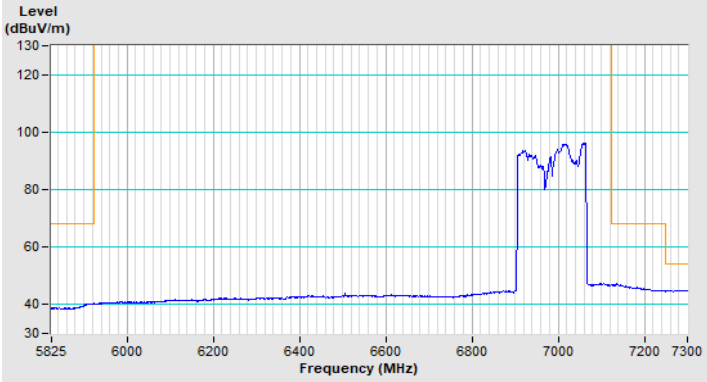

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak

802.11be (EHT320) Channel 31

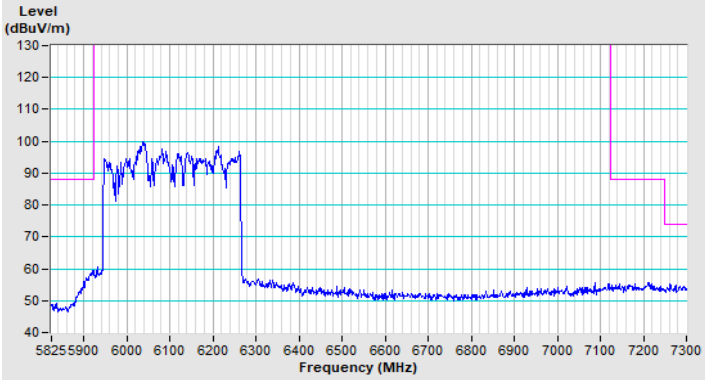

Horizontal (Peak)

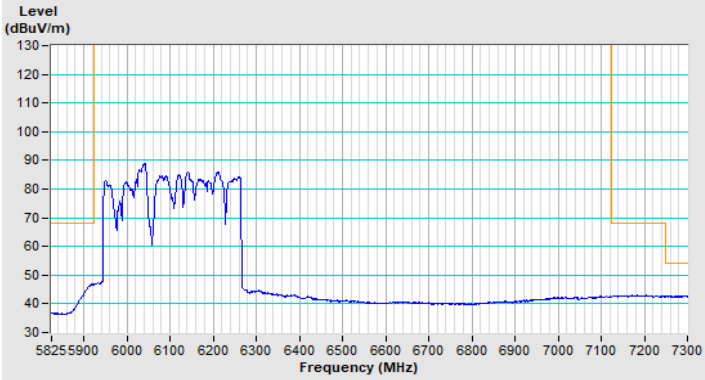

Horizontal (Average)

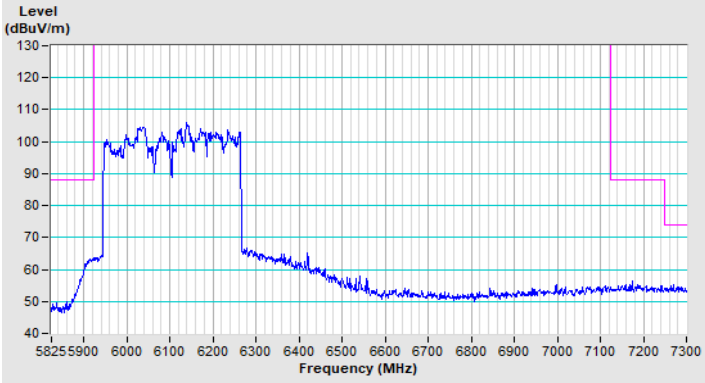

Vertical (Peak)

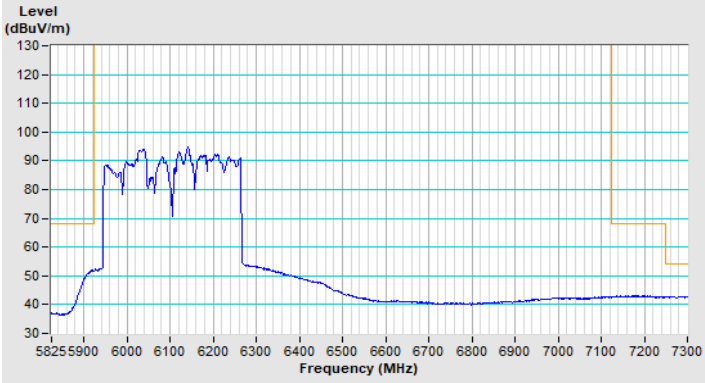

Vertical (Average)

802.11be (EHT320) Channel 191

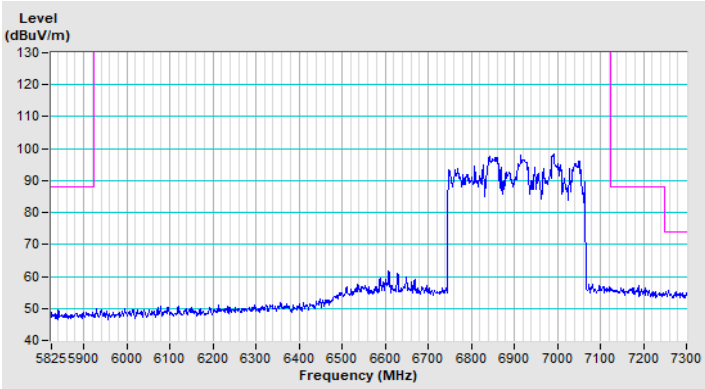

Horizontal (Peak)

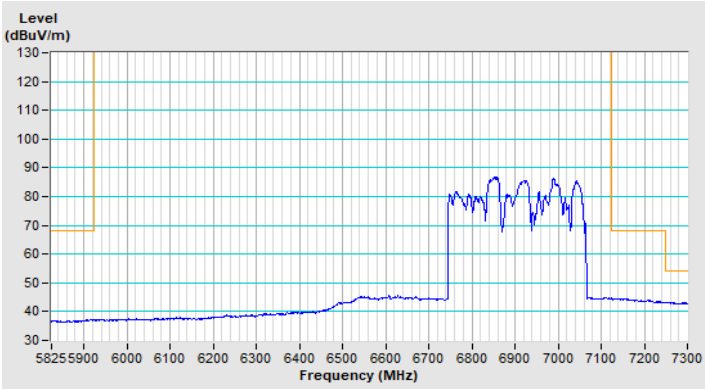

Horizontal (Average)

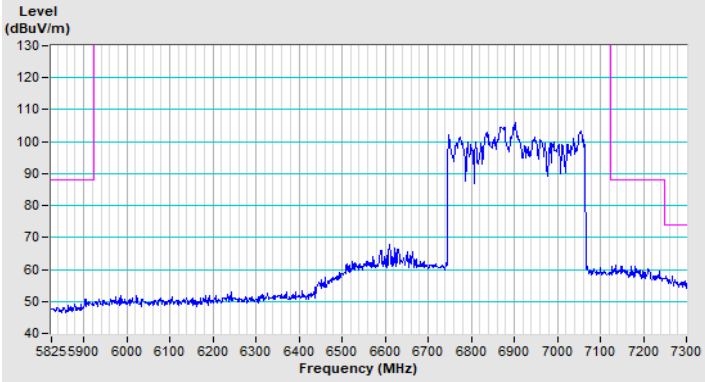

Vertical (Peak)

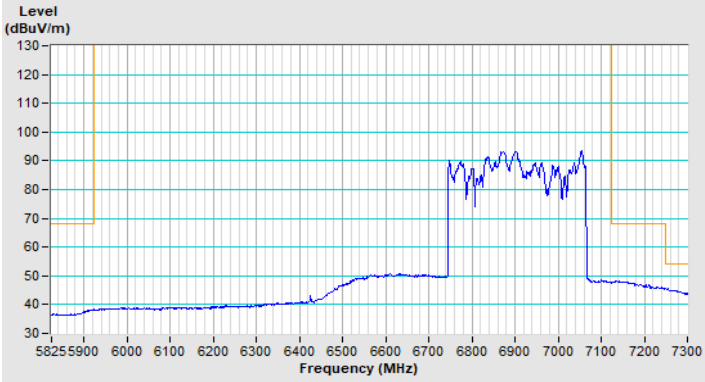

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab
Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab
Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@bureauveritas.com
Web Site: http://ee.bureauveritas.com.tw

The address and road map of all our labs can be found in our web site also.

--- END ---