



NR n41 SCS 30 kHz, MIMO-Ant 2, Channel Bandwidth: 60 MHz

CH 505200 (2526 MHz)

1 RB

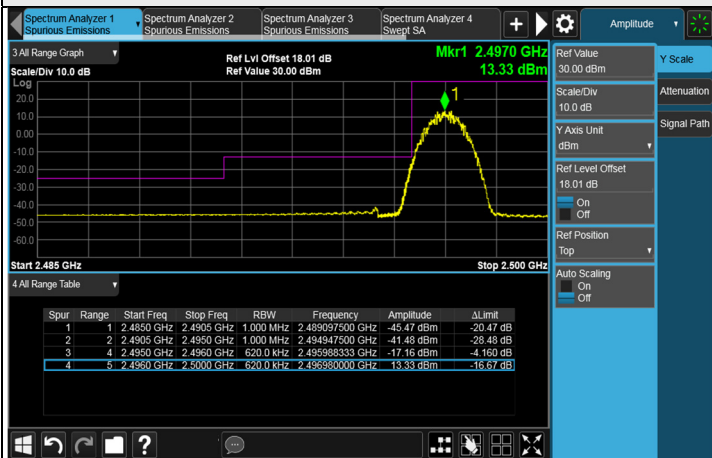


FULL RB


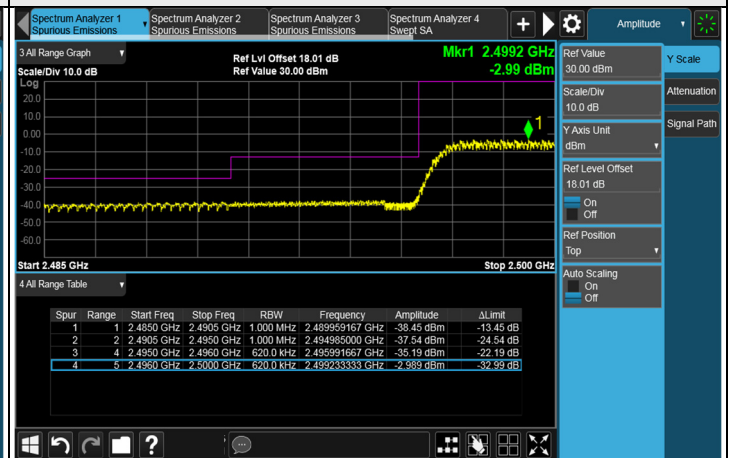


CH 531996 (2659.98 MHz)

1 RB

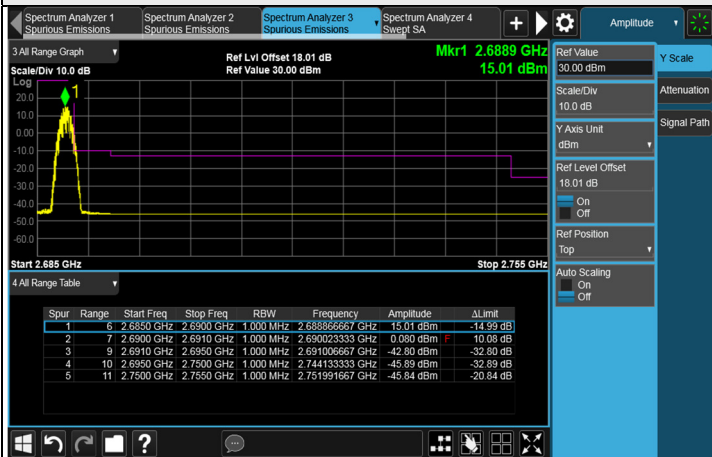

FULL RB

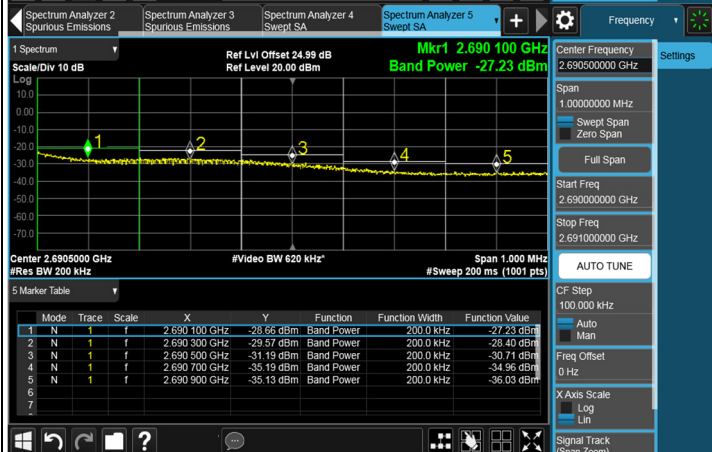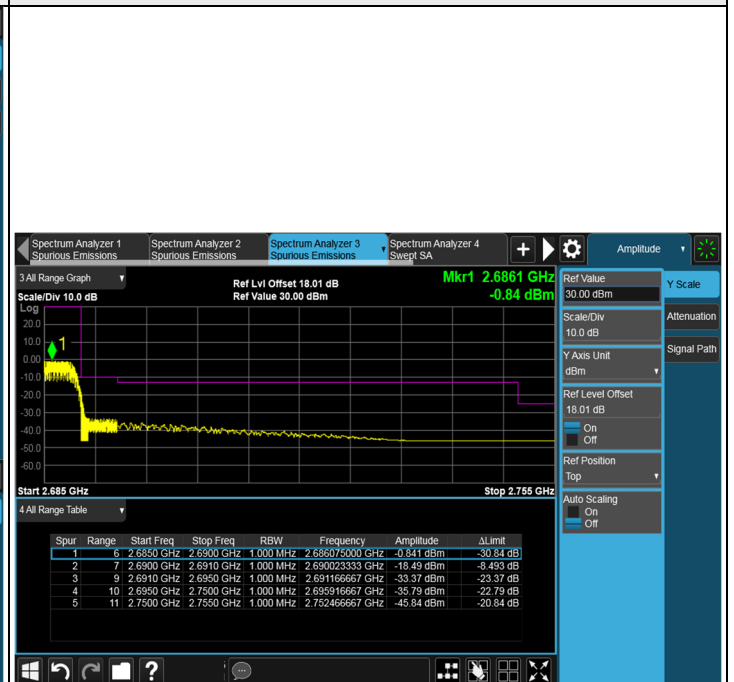

[RBW = 200 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW = 200 kHz] + 10log(1000/200)


To compensate for this integration before comparison to the limit, 6.98 dB was added to Ref Lvl Offset.

i.e. 18.01 dB CF + 6.98 dB integration compensation factor = 24.99 dB Ref Lvl Offset

NR n41 SCS 30 kHz, MIMO-Ant 2, Channel Bandwidth: 70 MHz



Channel 506202 (2531.01 MHz)

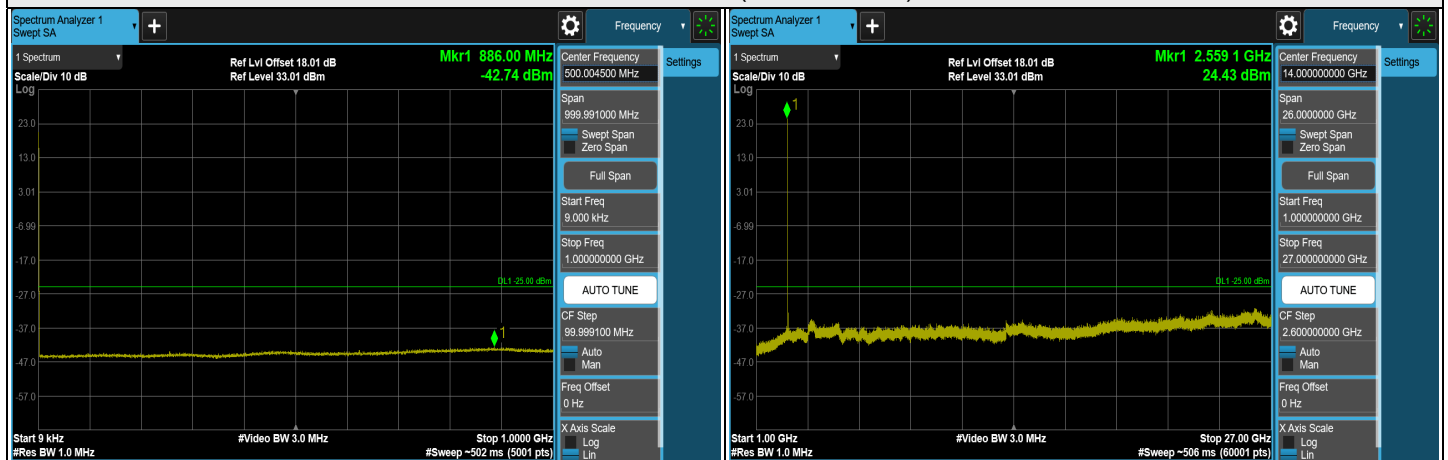

Channel 518598 (2592.99 MHz)




Channel 531000 (2655 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n41 SCS 30 kHz, MIMO-Ant 2, Channel Bandwidth: 70 MHz

CH 506202 (2531.01 MHz)

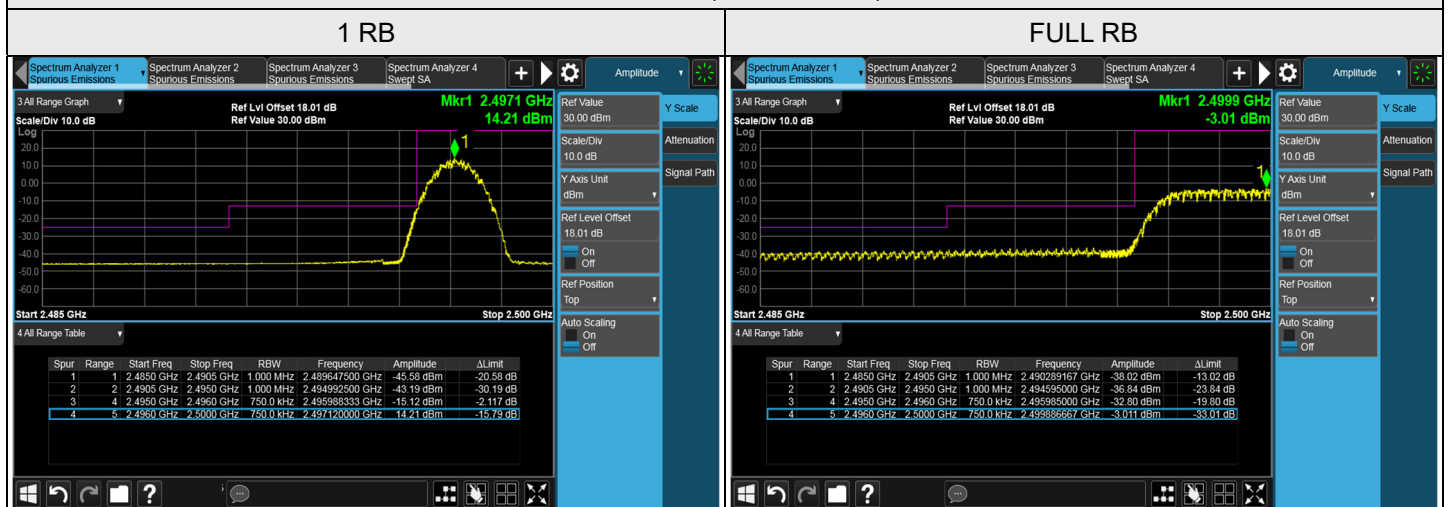

CH 531000 (2655 MHz)



[RBW = 200 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW = 200 kHz] + 10log(1000/200)


To compensate for this integration before comparison to the limit, 6.98 dB was added to Ref Lvl Offset.

i.e. 18.01 dB CF + 6.98 dB integration compensation factor = 24.99 dB Ref Lvl Offset


NR n41 SCS 30 kHz, MIMO-Ant 2, Channel Bandwidth: 80 MHz



Channel 507204 (2536.02 MHz)

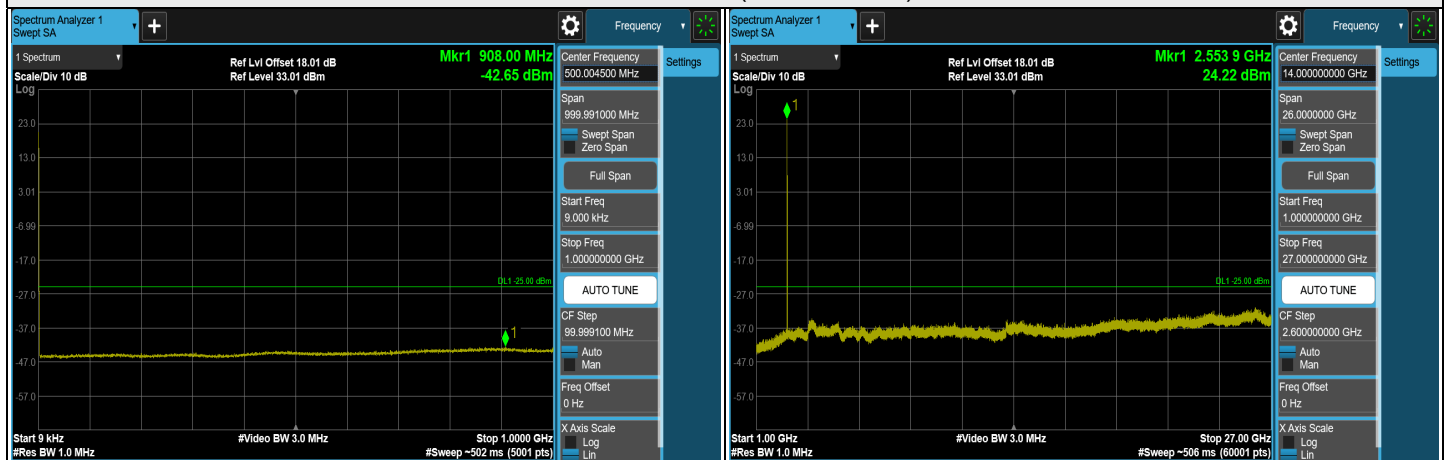

Channel 518598 (2592.99 MHz)

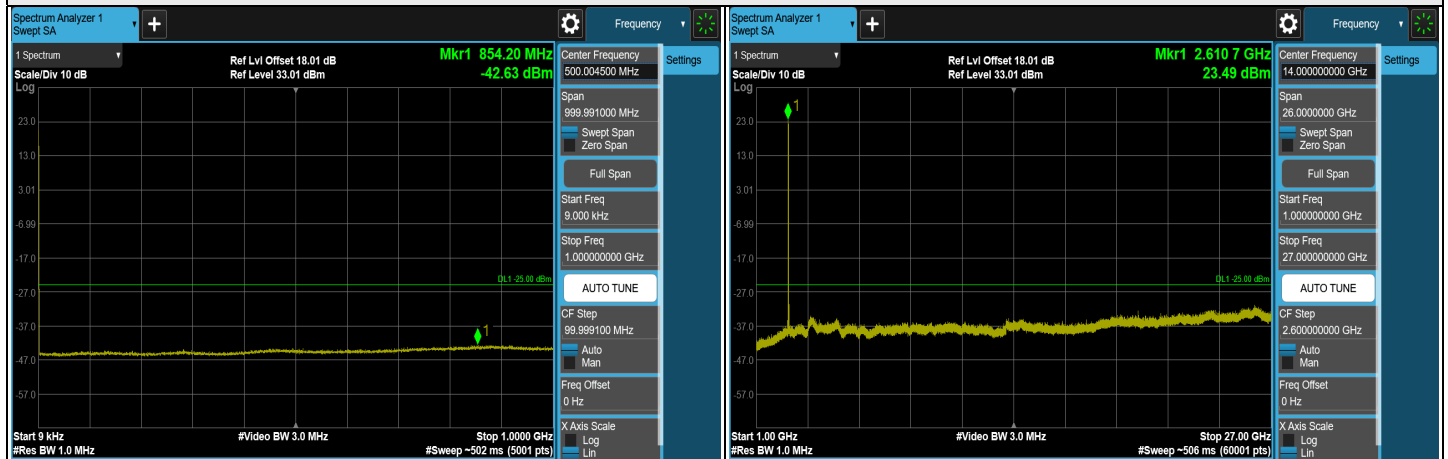

Channel 529998 (2649.99 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n41 SCS 30 kHz, MIMO-Ant 2, Channel Bandwidth: 80 MHz

CH 507204 (2536.02 MHz)



[RBW = 200 kHz / Reference RBW = 820 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW = 200 kHz] + 10log(820/200)



To compensate for this integration before comparison to the limit, 6.12 dB was added to Ref Lvl Offset.

i.e. 18.01 dB CF + 6.12 dB integration compensation factor = 24.13 dB Ref Lvl Offset

CH 529998 (2649.99 MHz)

1 RB

FULL RB

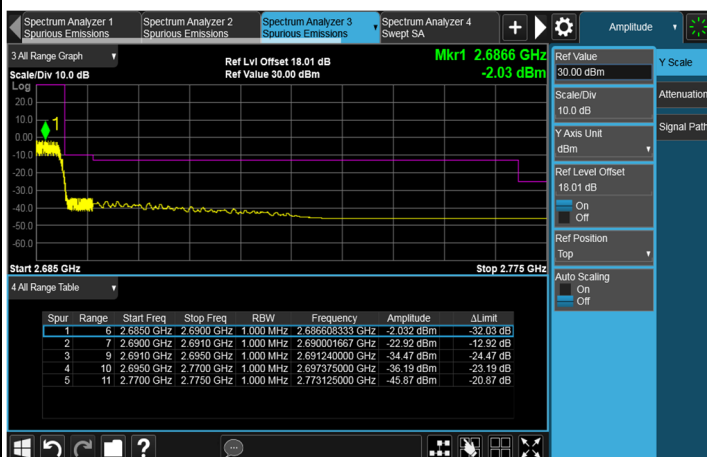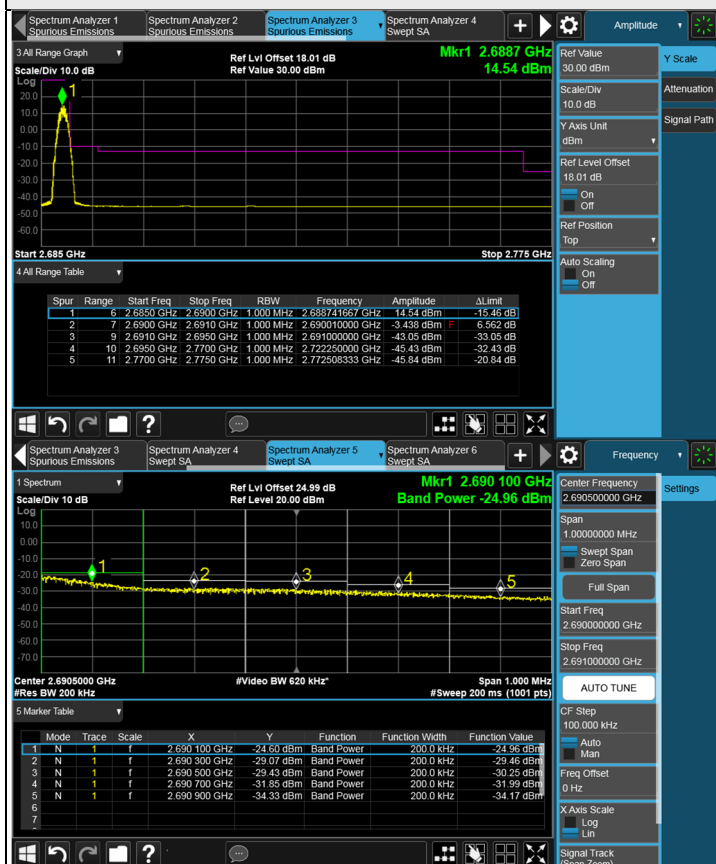


[RBW = 200 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW = 200 kHz] + 10log(1000/200)

To compensate for this integration before comparison to the limit, 6.98 dB was added to Ref Lvl Offset.

i.e. 18.01 dB CF + 6.98 dB integration compensation factor = 24.99 dB Ref Lvl Offset


NR n41 SCS 30 kHz, MIMO-Ant 2, Channel Bandwidth: 90 MHz

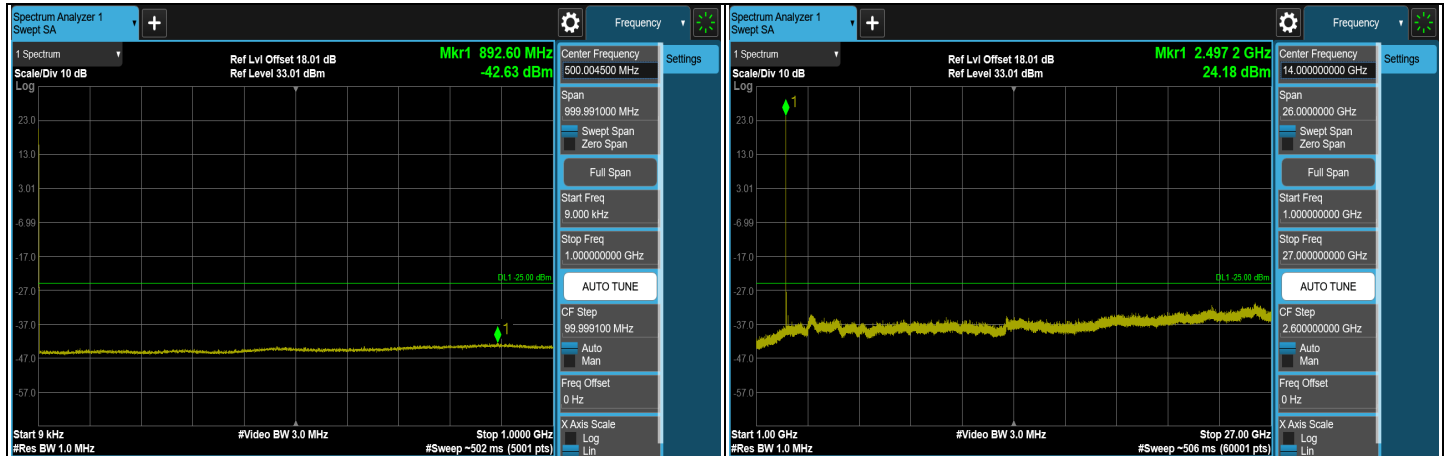

Channel 508200 (2541 MHz)



Channel 518598 (2592.99 MHz)

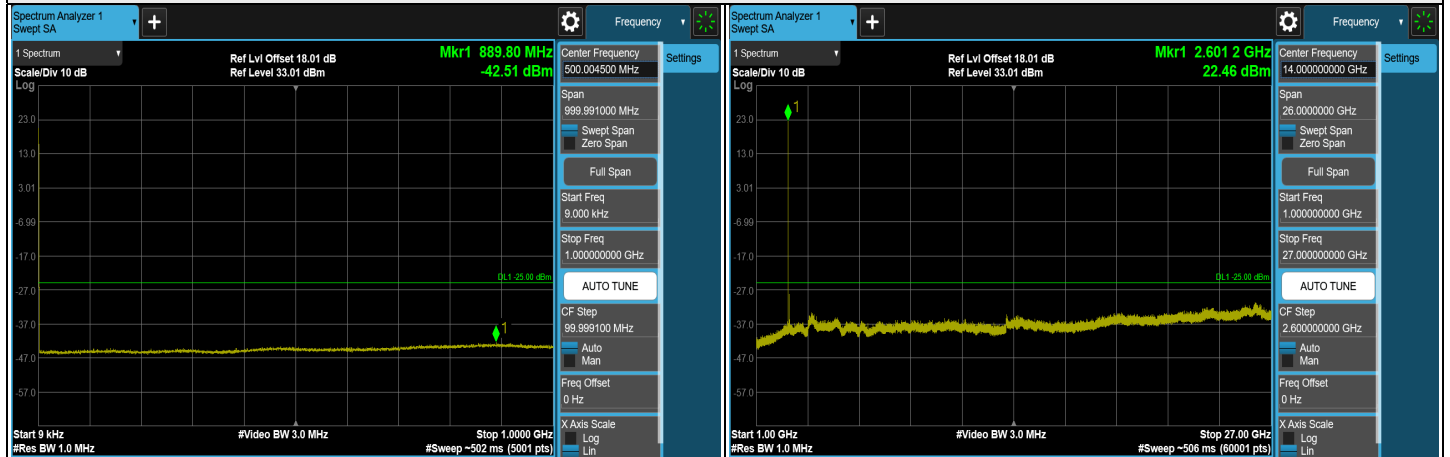

Channel 528996 (2644.98 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n41 SCS 30 kHz, MIMO-Ant 2, Channel Bandwidth: 90 MHz

CH 508200 (2541 MHz)



[RBW = 200 kHz / Reference RBW = 910 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW = 200 kHz] + $10\log(910/200)$

To compensate for this integration before comparison to the limit, 6.58 dB was added to Ref Lvl Offset.

i.e. 18.01 dB CF + 6.58 dB integration compensation factor = 24.59 dB Ref Lvl Offset