




LTE Band 71, Channel Bandwidth: 15 MHz

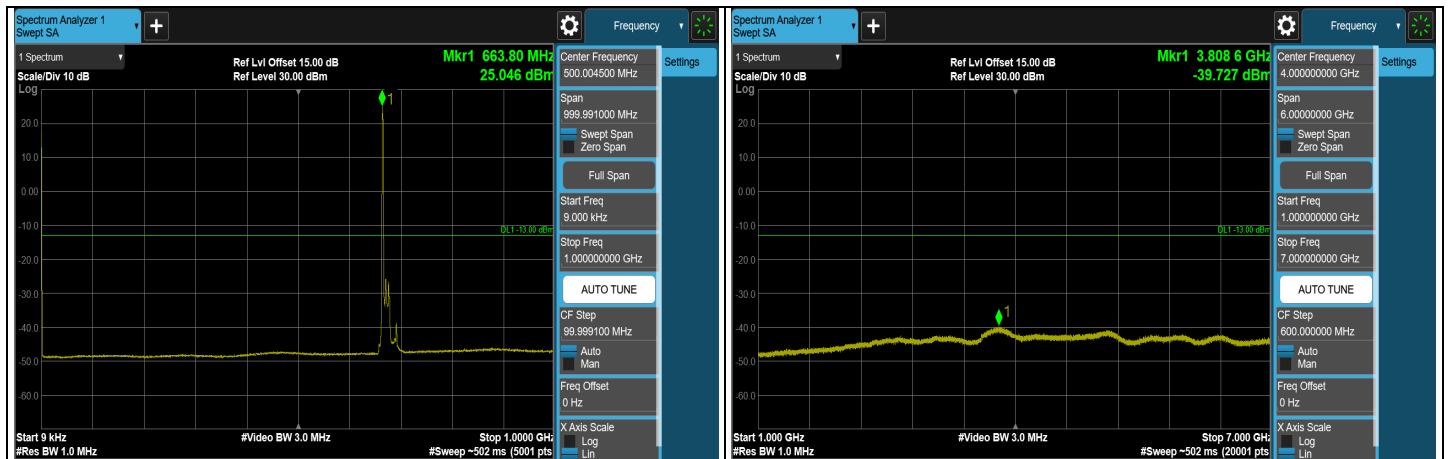

CH 133197 (670.5 MHz)

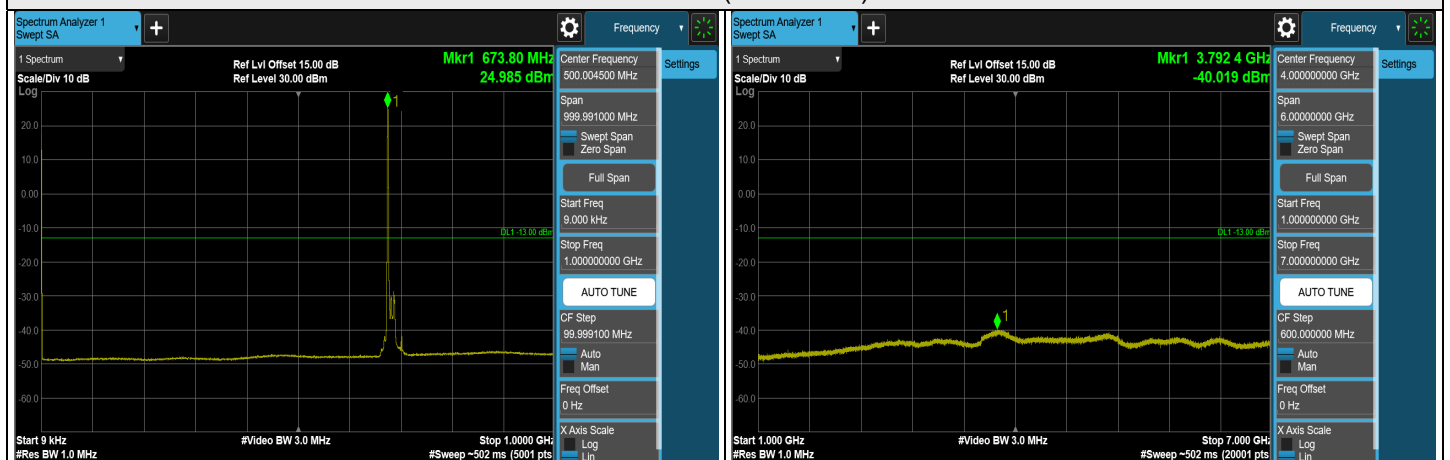


CH 133297 (680.5 MHz)

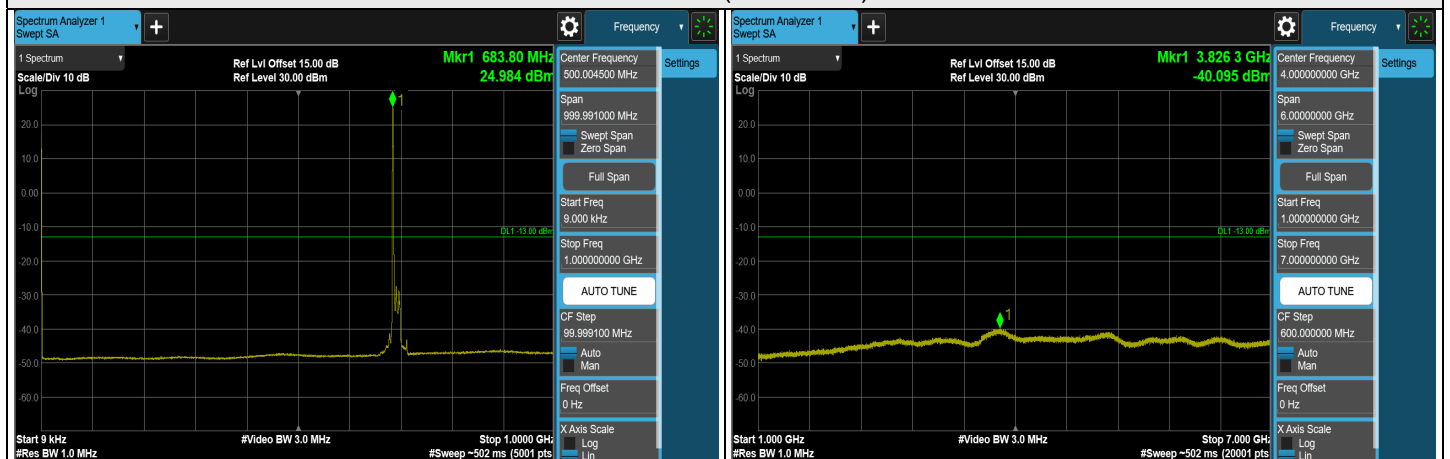


CH 133397 (690.5 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 71, Channel Bandwidth: 15 MHz

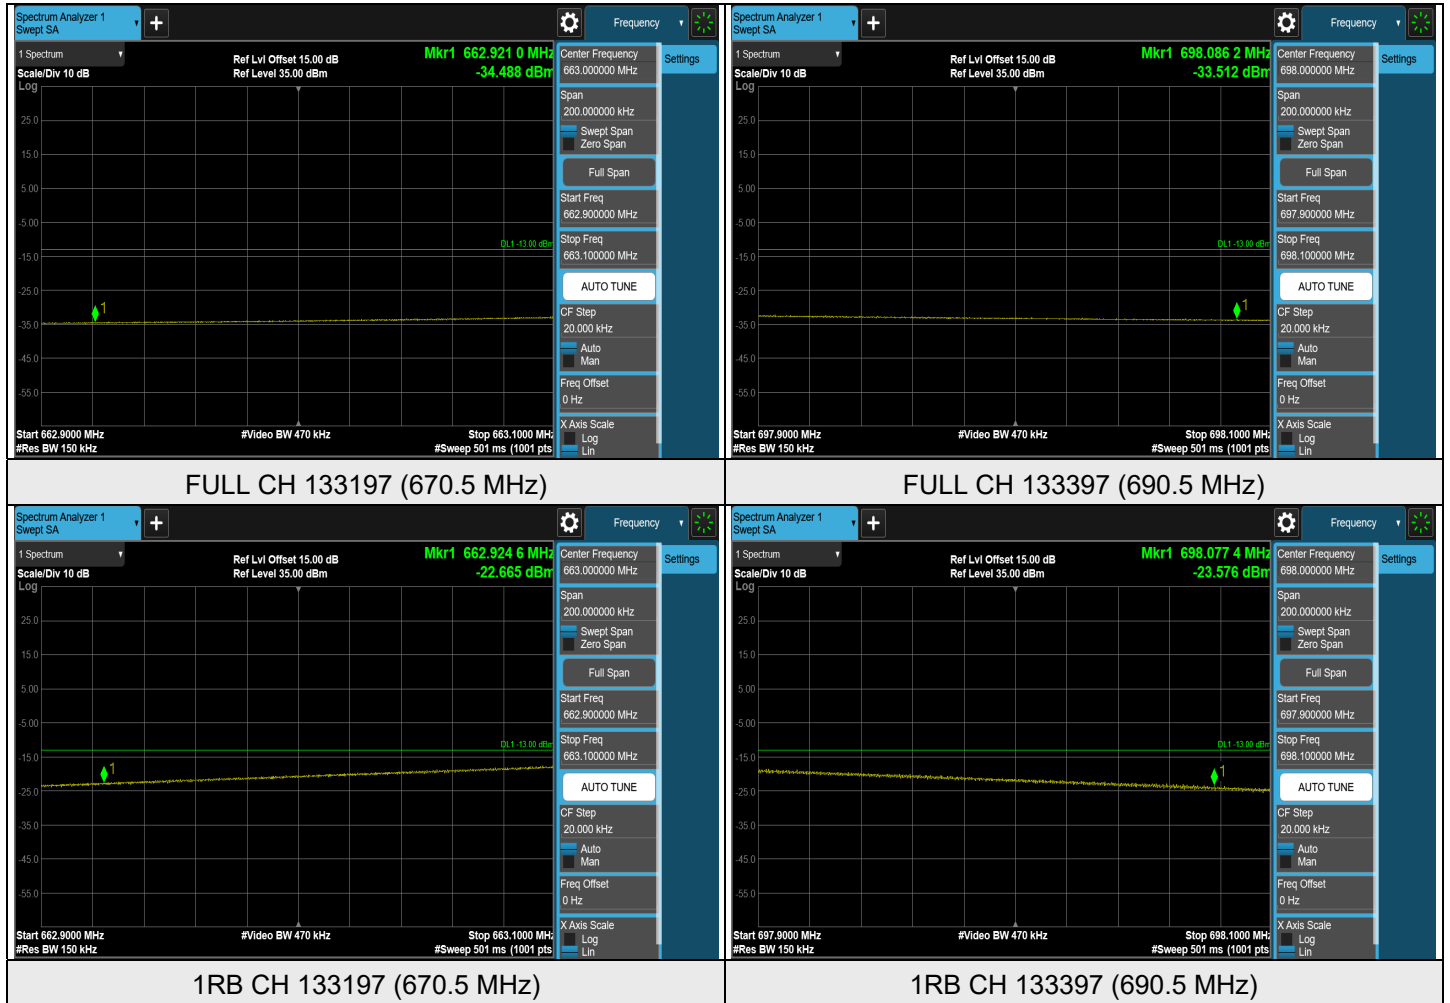


LTE Band 71, Channel Bandwidth: 20 MHz

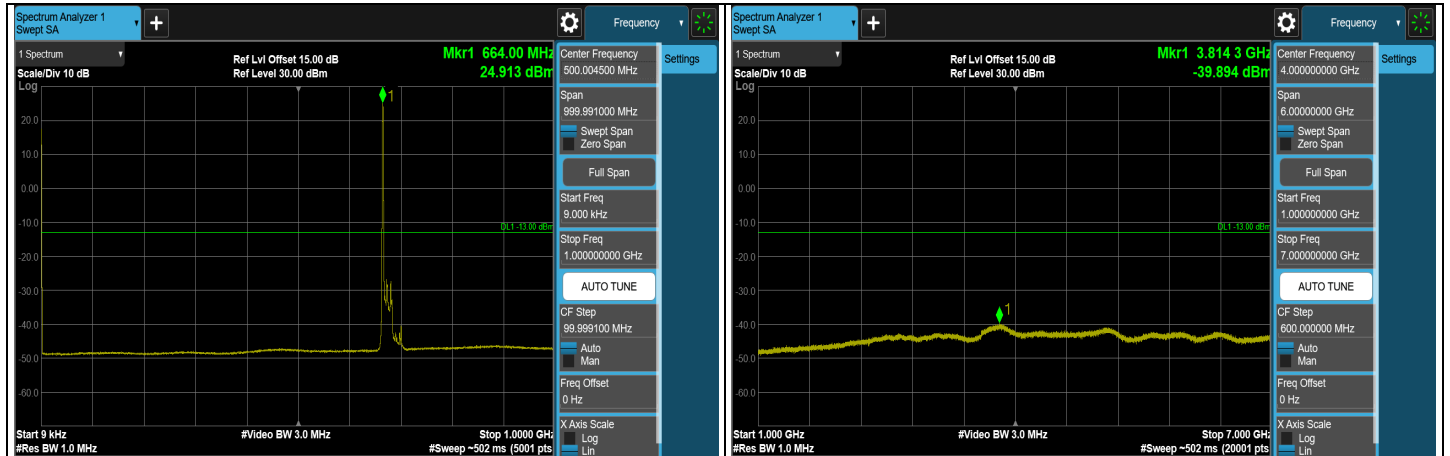

CH 133222 (673 MHz)

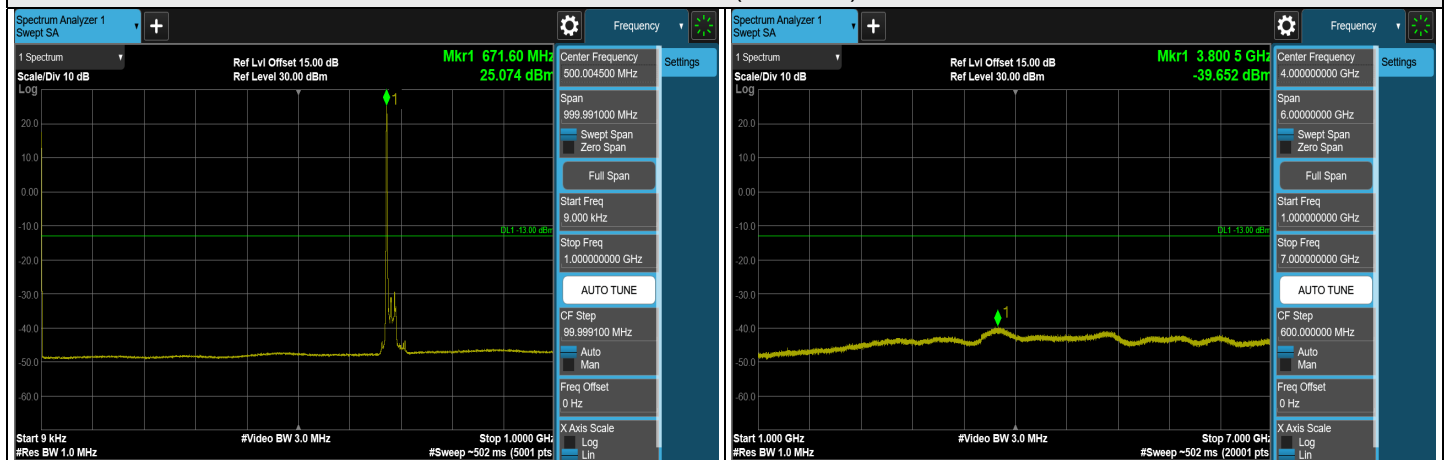


CH 133297 (680.5 MHz)

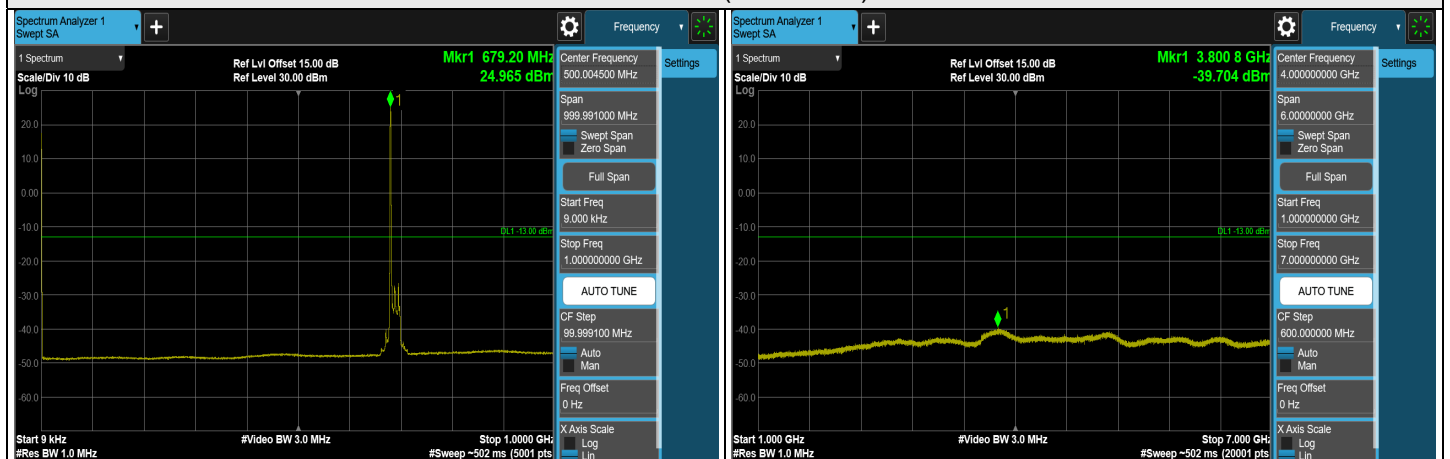

CH 133372 (688 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

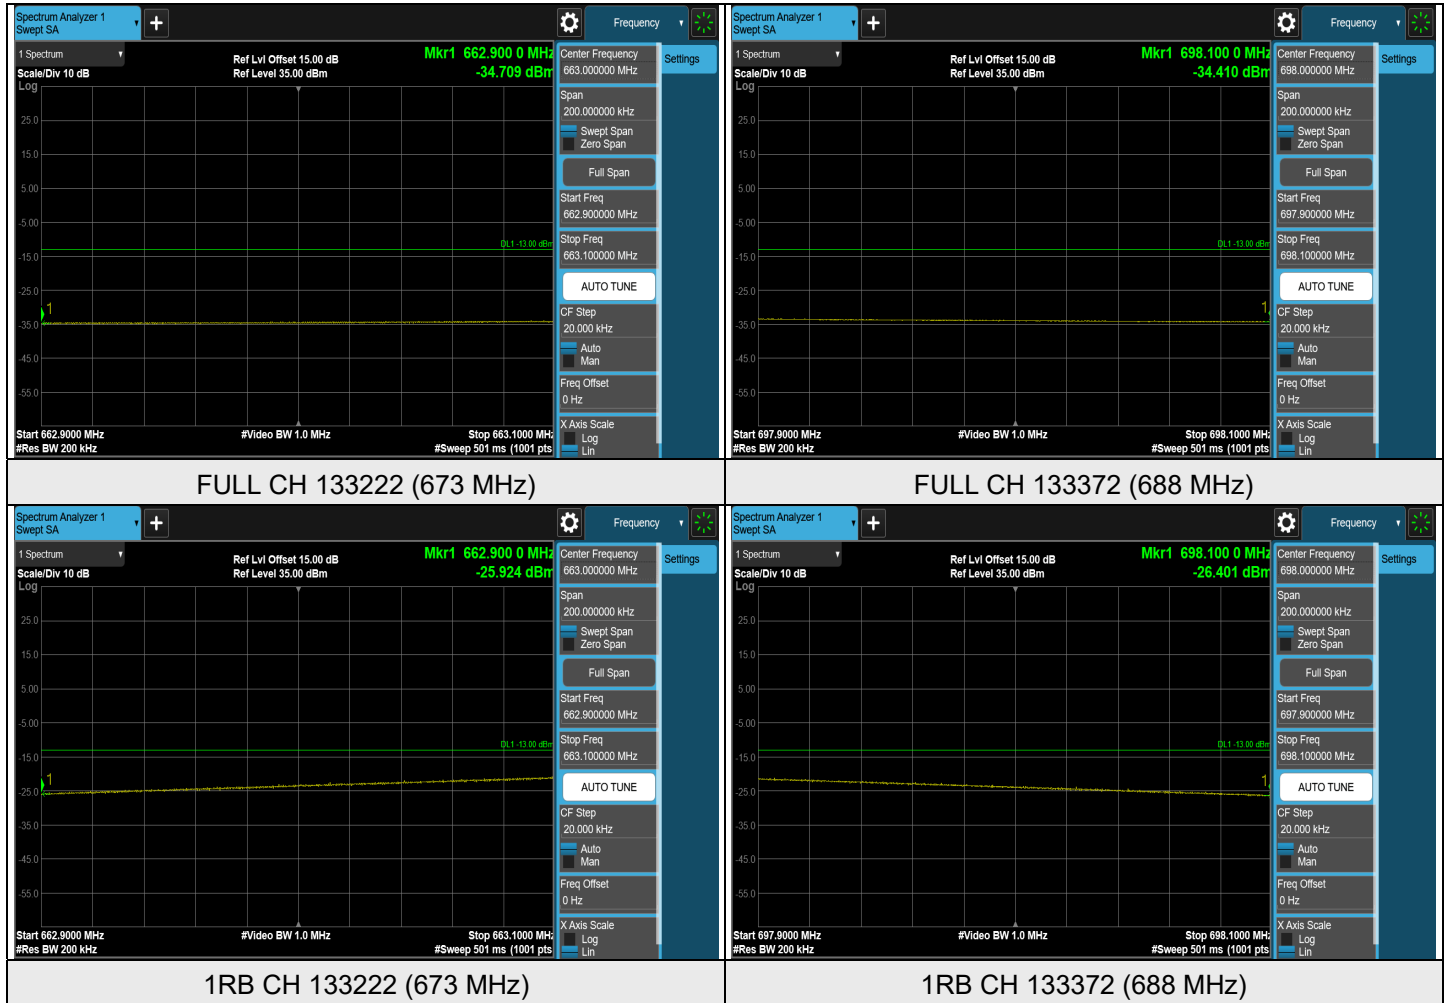LTE Band 71, Channel Bandwidth: 20 MHz

7.6 Radiated Spurious Emissions below 1GHz


7.6.1 LTE Band 2

RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-43.92	-13.00	-30.92	1.25 H	80	64.59	-108.51
2	104.69	-46.85	-13.00	-33.85	1.25 H	250	65.16	-112.01
3	176.47	-52.60	-13.00	-39.60	1.00 H	250	56.82	-109.42
4	295.78	-48.88	-13.00	-35.88	1.50 H	132	58.80	-107.68
5	389.87	-52.18	-13.00	-39.18	1.00 H	230	53.20	-105.38
6	819.58	-55.06	-13.00	-42.06	1.25 H	26	42.15	-97.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

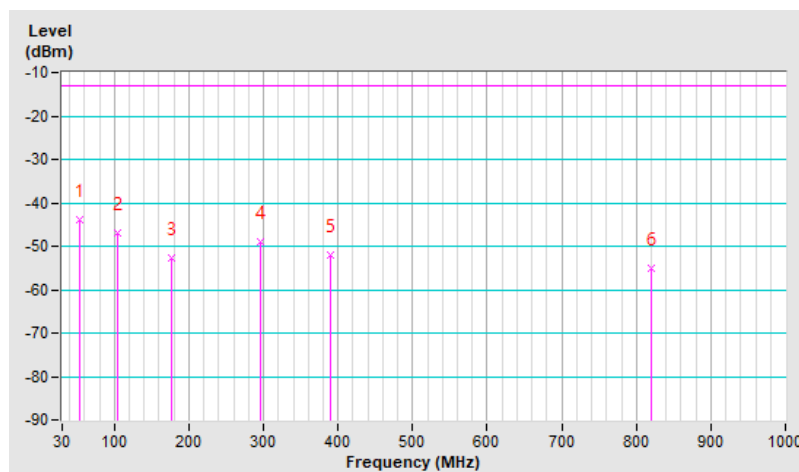


RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.73	-32.69	-13.00	-19.69	1.25 V	2	76.30	-108.99
2	101.78	-39.21	-13.00	-26.21	1.00 V	17	73.34	-112.55
3	178.41	-47.00	-13.00	-34.00	1.50 V	4	62.63	-109.63
4	220.12	-47.11	-13.00	-34.11	1.00 V	2	64.49	-111.60
5	428.67	-52.78	-13.00	-39.78	1.00 V	321	51.49	-104.27
6	801.15	-52.27	-13.00	-39.27	1.25 V	332	45.03	-97.30

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

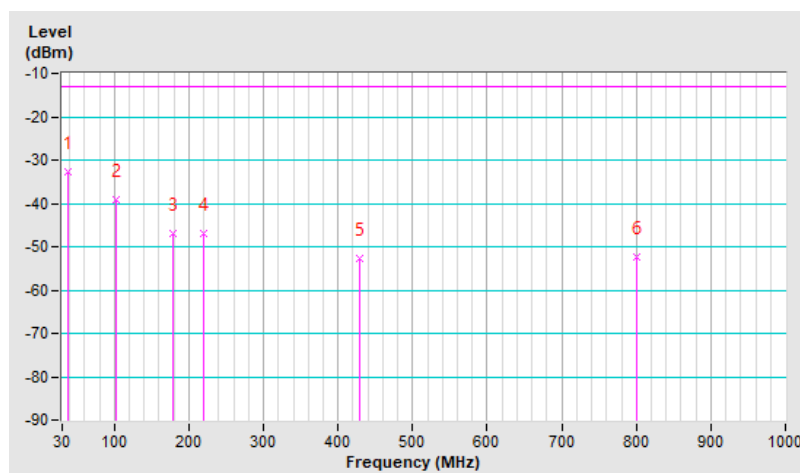


7.6.2 LTE Band 4

RF Mode	LTE Band 4 Channel Bandwidth: 20MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	65.89	-43.50	-13.00	-30.50	1.25 H	58	66.51	-110.01
2	110.51	-47.70	-13.00	-34.70	1.00 H	70	63.70	-111.40
3	169.68	-52.59	-13.00	-39.59	1.50 H	263	56.07	-108.66
4	295.78	-46.28	-13.00	-33.28	1.25 H	94	61.40	-107.68
5	389.87	-52.91	-13.00	-39.91	1.00 H	218	52.47	-105.38
6	819.58	-55.22	-13.00	-42.22	1.00 H	168	41.99	-97.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

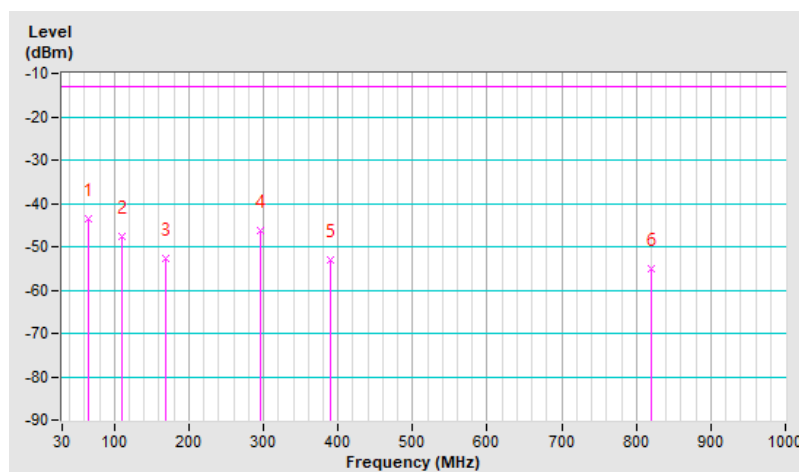


RF Mode	LTE Band 4 Channel Bandwidth: 20MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.73	-33.31	-13.00	-20.31	1.25 V	20	75.68	-108.99
2	101.78	-40.19	-13.00	-27.19	1.00 V	357	72.36	-112.55
3	178.41	-47.91	-13.00	-34.91	1.50 V	2	61.72	-109.63
4	223.03	-48.40	-13.00	-35.40	1.00 V	176	63.10	-111.50
5	296.75	-51.19	-13.00	-38.19	1.00 V	242	56.46	-107.65
6	798.24	-53.19	-13.00	-40.19	1.25 V	24	44.14	-97.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

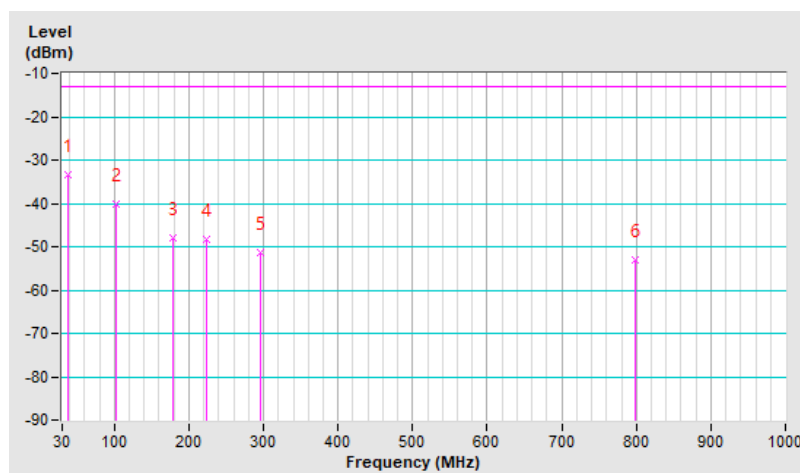


7.6.3 LTE Band 5

RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20600 : 844 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	65.89	-45.73	-13.00	-32.73	1.00 H	66	66.43	-112.16
2	104.69	-50.01	-13.00	-37.01	1.00 H	266	64.15	-114.16
3	296.75	-49.60	-13.00	-36.60	1.00 H	128	60.20	-109.80
4	389.87	-54.60	-13.00	-41.60	1.00 H	48	52.93	-107.53
5	798.24	-56.96	-13.00	-43.96	1.00 H	71	42.52	-99.48
6	948.59	-57.27	-13.00	-44.27	1.00 H	301	40.09	-97.36

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

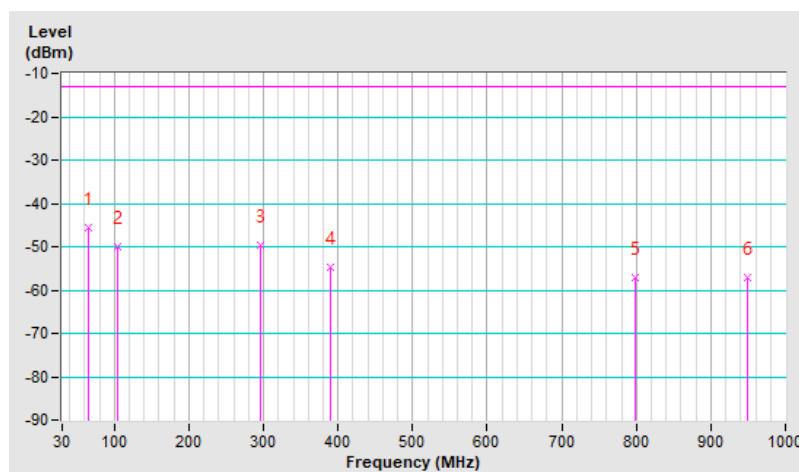


RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20600 : 844 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.52	-33.86	-13.00	-20.86	1.00 V	18	76.67	-110.53
2	106.63	-40.45	-13.00	-27.45	1.25 V	18	73.48	-113.93
3	172.59	-49.01	-13.00	-36.01	1.00 V	348	62.06	-111.07
4	217.21	-48.90	-13.00	-35.90	1.50 V	182	64.85	-113.75
5	389.87	-54.07	-13.00	-41.07	1.25 V	1	53.46	-107.53
6	945.68	-53.36	-13.00	-40.36	1.00 V	150	44.05	-97.41

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

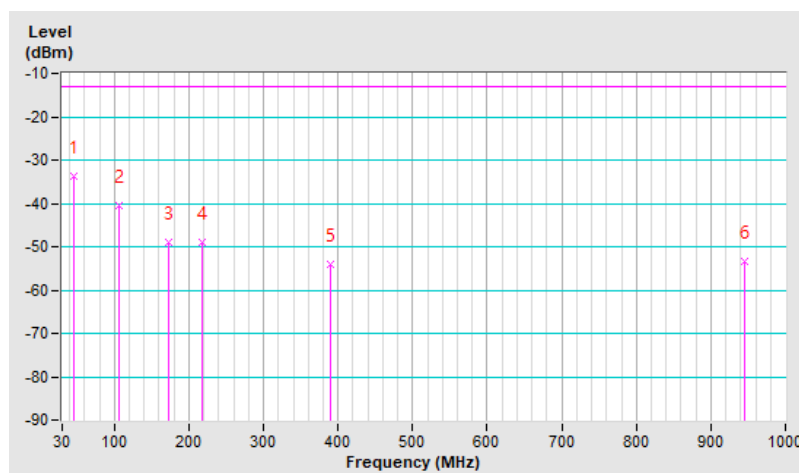


7.6.4 LTE Band 12

RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-46.69	-13.00	-33.69	1.50 H	85	63.97	-110.66
2	110.51	-50.06	-13.00	-37.06	1.25 H	79	63.49	-113.55
3	179.38	-55.49	-13.00	-42.49	1.00 H	254	56.46	-111.95
4	288.02	-51.46	-13.00	-38.46	1.00 H	128	58.55	-110.01
5	405.39	-55.23	-13.00	-42.23	1.25 H	128	51.99	-107.22
6	819.58	-57.55	-13.00	-44.55	1.00 H	23	41.81	-99.36

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

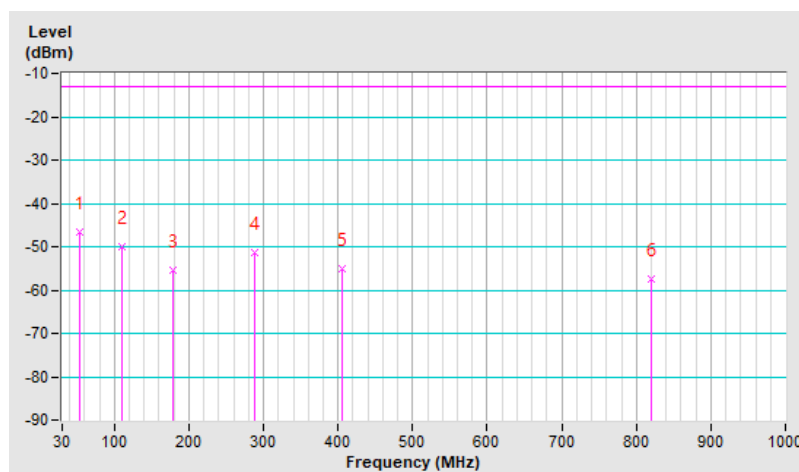


RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.73	-35.29	-13.00	-22.29	1.25 V	14	75.85	-111.14
2	104.69	-41.80	-13.00	-28.80	1.50 V	217	72.36	-114.16
3	176.47	-51.11	-13.00	-38.11	1.00 V	12	60.46	-111.57
4	223.03	-50.97	-13.00	-37.97	1.50 V	173	62.68	-113.65
5	428.67	-54.90	-13.00	-41.90	1.00 V	314	51.52	-106.42
6	946.65	-52.93	-13.00	-39.93	1.25 V	17	44.47	-97.40

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

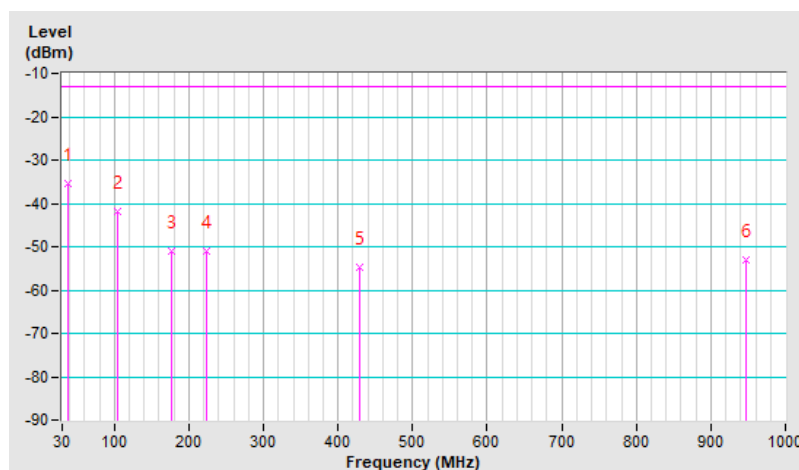


7.6.5 LTE Band 66

RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 132665 : 1779.3 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-44.57	-13.00	-31.57	1.25 H	140	63.94	-108.51
2	103.72	-47.74	-13.00	-34.74	1.50 H	251	64.42	-112.16
3	177.44	-52.48	-13.00	-39.48	1.00 H	252	57.05	-109.53
4	295.78	-47.02	-13.00	-34.02	1.25 H	128	60.66	-107.68
5	389.87	-52.65	-13.00	-39.65	1.00 H	53	52.73	-105.38
6	947.62	-52.21	-13.00	-39.21	1.50 H	284	43.01	-95.22

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

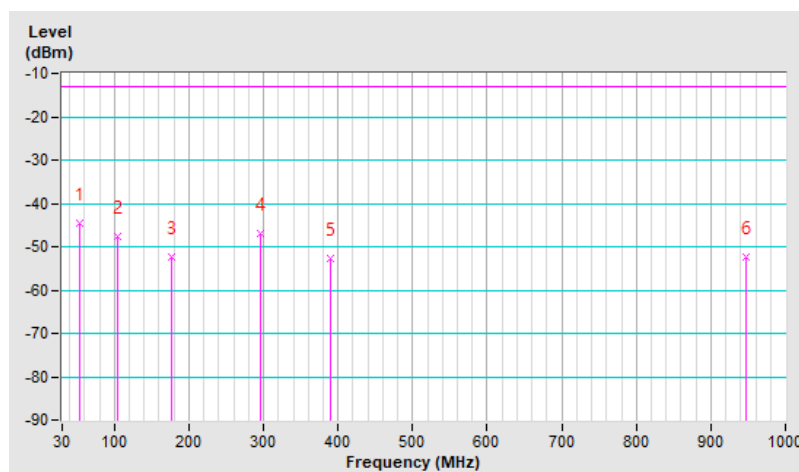


RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 132665 : 1779.3 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-35.86	-13.00	-22.86	1.50 V	234	72.65	-108.51
2	106.63	-43.41	-13.00	-30.41	1.00 V	355	68.37	-111.78
3	229.82	-51.23	-13.00	-38.23	1.25 V	9	59.40	-110.63
4	295.78	-53.44	-13.00	-40.44	1.00 V	224	54.24	-107.68
5	389.87	-54.66	-13.00	-41.66	1.25 V	323	50.72	-105.38
6	799.21	-53.23	-13.00	-40.23	1.00 V	320	44.09	-97.32

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

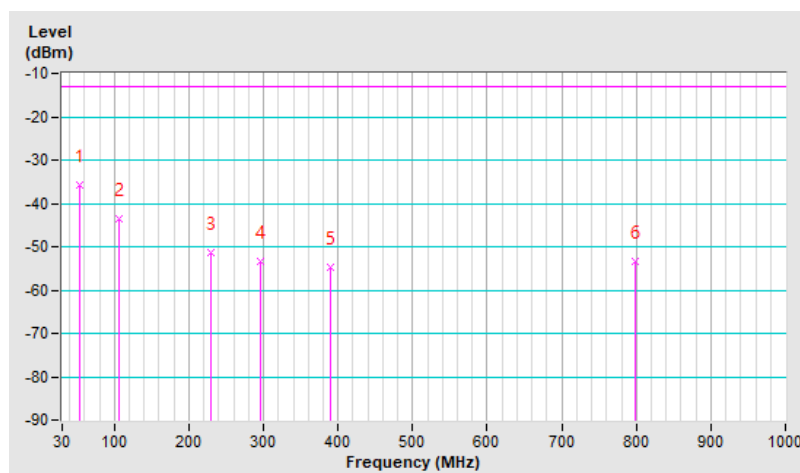


7.6.6 LTE Band 71

RF Mode	LTE Band 71 Channel Bandwidth: 20MHz	Channel	CH 133297 : 680.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	65.89	-43.65	-13.00	-30.65	1.25 H	67	68.51	-112.16
2	108.57	-48.02	-13.00	-35.02	1.25 H	272	65.61	-113.63
3	144.46	-51.57	-13.00	-38.57	1.00 H	252	58.92	-110.49
4	288.02	-48.77	-13.00	-35.77	1.50 H	128	61.24	-110.01
5	405.39	-53.94	-13.00	-40.94	1.50 H	144	53.28	-107.22
6	798.24	-52.49	-13.00	-39.49	1.00 H	2	46.99	-99.48

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

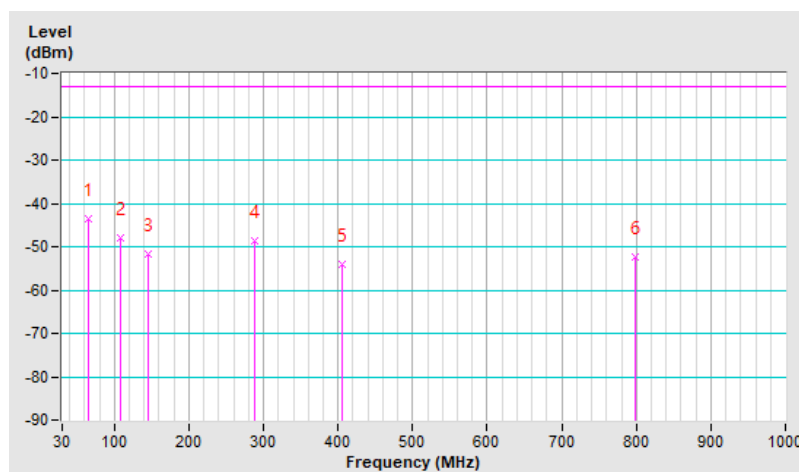


RF Mode	LTE Band 71 Channel Bandwidth: 20MHz	Channel	CH 133297 : 680.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.52	-34.97	-13.00	-21.97	1.50 V	7	75.56	-110.53
2	101.78	-41.50	-13.00	-28.50	1.50 V	4	73.20	-114.70
3	220.12	-50.29	-13.00	-37.29	1.25 V	355	63.46	-113.75
4	295.78	-52.71	-13.00	-39.71	1.00 V	221	57.12	-109.83
5	428.67	-54.78	-13.00	-41.78	1.50 V	319	51.64	-106.42
6	798.24	-54.17	-13.00	-41.17	1.00 V	258	45.31	-99.48

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

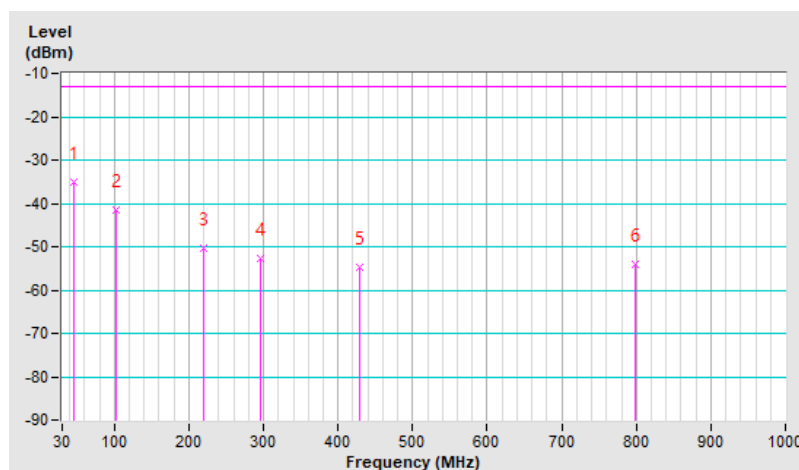

7.7 Radiated Spurious Emissions above 1GHz

7.7.1 LTE Band 2

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 18607 : 1850.7 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-48.84	-13.00	-35.84	1.77 H	200	45.86	-94.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-47.92	-13.00	-34.92	1.57 V	341	46.78	-94.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-48.30	-13.00	-35.30	1.79 H	197	45.91	-94.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.43	-13.00	-34.43	1.63 V	340	46.78	-94.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 19193 : 1909.3 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-48.14	-13.00	-35.14	1.82 H	202	45.74	-93.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-47.16	-13.00	-34.16	1.61 V	338	46.72	-93.88

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 18625 : 1852.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-48.88	-13.00	-35.88	1.79 H	204	45.79	-94.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-47.99	-13.00	-34.99	1.62 V	334	46.68	-94.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-48.35	-13.00	-35.35	1.82 H	195	45.86	-94.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.38	-13.00	-34.38	1.66 V	341	46.83	-94.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-48.08	-13.00	-35.08	1.84 H	198	45.83	-93.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-47.09	-13.00	-34.09	1.61 V	336	46.82	-93.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 18700 : 1860 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-48.65	-13.00	-35.65	1.82 H	198	45.88	-94.53
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-47.81	-13.00	-34.81	1.58 V	336	46.72	-94.53

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-48.28	-13.00	-35.28	1.81 H	197	45.93	-94.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.32	-13.00	-34.32	1.61 V	333	46.89	-94.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 19100 : 1900 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-48.22	-13.00	-35.22	1.75 H	201	45.81	-94.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-47.36	-13.00	-34.36	1.63 V	331	46.67	-94.03

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.2 LTE Band 4

RF Mode	LTE Band 4 Channel Bandwidth: 1.4MHz	Channel	CH 19957 : 1710.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-46.13	-13.00	-33.13	1.70 H	15	49.64	-95.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-48.20	-13.00	-35.20	2.33 V	152	47.57	-95.77

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 4 Channel Bandwidth: 1.4MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-46.08	-13.00	-33.08	1.68 H	19	49.64	-95.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-48.11	-13.00	-35.11	2.29 V	147	47.61	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 4 Channel Bandwidth: 1.4MHz	Channel	CH 20393 : 1754.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-46.01	-13.00	-33.01	1.76 H	13	49.67	-95.68
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-48.17	-13.00	-35.17	2.31 V	145	47.51	-95.68

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 4 Channel Bandwidth: 5MHz	Channel	CH 19975 : 1712.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-46.09	-13.00	-33.09	1.72 H	19	49.68	-95.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-48.26	-13.00	-35.26	2.31 V	146	47.51	-95.77

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 4 Channel Bandwidth: 5MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-46.01	-13.00	-33.01	1.69 H	16	49.71	-95.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-48.14	-13.00	-35.14	2.38 V	150	47.58	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 4 Channel Bandwidth: 5MHz	Channel	CH 20375 : 1752.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-46.18	-13.00	-33.18	1.72 H	14	49.52	-95.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-48.07	-13.00	-35.07	2.35 V	149	47.63	-95.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 4 Channel Bandwidth: 20MHz	Channel	CH 20050 : 1720 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-46.08	-13.00	-33.08	1.74 H	12	49.65	-95.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-48.21	-13.00	-35.21	2.30 V	147	47.52	-95.73

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 4 Channel Bandwidth: 20MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-45.99	-13.00	-32.99	1.73 H	18	49.73	-95.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-48.08	-13.00	-35.08	2.34 V	151	47.64	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 4 Channel Bandwidth: 20MHz	Channel	CH 20300 : 1745 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-46.19	-13.00	-33.19	1.71 H	16	49.53	-95.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.11	-13.00	-35.11	2.37 V	151	47.61	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.3 LTE Band 5

RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20407 : 824.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-51.76	-13.00	-38.76	1.56 H	81	49.55	-101.31
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-49.70	-13.00	-36.70	1.54 V	187	51.61	-101.31

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-51.73	-13.00	-38.73	1.57 H	79	49.45	-101.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-49.44	-13.00	-36.44	1.59 V	189	51.74	-101.18

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20643 : 848.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-51.52	-13.00	-38.52	1.64 H	76	49.53	-101.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-49.37	-13.00	-36.37	1.52 V	190	51.68	-101.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20425 : 826.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-51.84	-13.00	-38.84	1.63 H	82	49.45	-101.29
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-49.70	-13.00	-36.70	1.55 V	186	51.59	-101.29

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-51.69	-13.00	-38.69	1.62 H	76	49.49	-101.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-49.36	-13.00	-36.36	1.52 V	191	51.82	-101.18

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20625 : 846.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-51.50	-13.00	-38.50	1.66 H	83	49.57	-101.07
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-49.48	-13.00	-36.48	1.56 V	188	51.59	-101.07

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20450 : 829 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-51.83	-13.00	-38.83	1.59 H	76	49.44	-101.27
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-49.52	-13.00	-36.52	1.53 V	188	51.75	-101.27

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-51.55	-13.00	-38.55	1.59 H	79	49.63	-101.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-49.36	-13.00	-36.36	1.54 V	189	51.82	-101.18

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20600 : 844 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-51.48	-13.00	-38.48	1.61 H	190	49.62	-101.10
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-49.33	-13.00	-36.33	1.61 V	190	51.77	-101.10

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

7.7.4 LTE Band 12

RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23017 : 699.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-47.84	-13.00	-34.84	1.61 H	224	53.65	-101.49
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-43.16	-13.00	-30.16	1.42 V	340	58.33	-101.49

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-47.91	-13.00	-34.91	1.55 H	223	53.51	-101.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-43.20	-13.00	-30.20	1.41 V	338	58.22	-101.42

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23173 : 715.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-47.70	-13.00	-34.70	1.59 H	226	53.66	-101.36
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-43.20	-13.00	-30.20	1.49 V	343	58.16	-101.36

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23035 : 701.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-47.83	-13.00	-34.83	1.59 H	230	53.64	-101.47
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-43.36	-13.00	-30.36	1.37 V	339	58.11	-101.47

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-47.75	-13.00	-34.75	1.61 H	229	53.67	-101.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-43.09	-13.00	-30.09	1.46 V	337	58.33	-101.42

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23155 : 713.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-47.79	-13.00	-34.79	1.52 H	223	53.57	-101.36
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-43.24	-13.00	-30.24	1.48 V	334	58.12	-101.36

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23060 : 704 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-47.77	-13.00	-34.77	1.54 H	227	53.67	-101.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-43.12	-13.00	-30.12	1.43 V	335	58.32	-101.44

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-47.70	-13.00	-34.70	1.53 H	226	53.72	-101.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-43.08	-13.00	-30.08	1.48 V	340	58.34	-101.42

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23130 : 711 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-47.75	-13.00	-34.75	1.53 H	229	53.64	-101.39
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-43.12	-13.00	-30.12	1.39 V	338	58.27	-101.39

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

7.7.5 LTE Band 66

RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 131979 : 1710.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-48.45	-13.00	-35.45	1.25 H	246	47.32	-95.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-47.23	-13.00	-34.23	2.18 V	80	48.54	-95.77

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 132322 : 1745 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.31	-13.00	-35.31	1.30 H	246	47.41	-95.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-47.08	-13.00	-34.08	2.19 V	79	48.64	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66 Channel Bandwidth: 1.4MHz	Channel	CH 132665 : 1779.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-48.08	-13.00	-35.08	1.31 H	249	47.41	-95.49
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-46.87	-13.00	-33.87	2.24 V	77	48.62	-95.49

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66 Channel Bandwidth: 5MHz	Channel	CH 131997 : 1712.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-48.52	-13.00	-35.52	1.23 H	244	47.25	-95.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-47.09	-13.00	-34.09	2.17 V	73	48.68	-95.77

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66 Channel Bandwidth: 5MHz	Channel	CH 132322 : 1745 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.38	-13.00	-35.38	1.32 H	243	47.34	-95.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-47.16	-13.00	-34.16	2.16 V	82	48.56	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66 Channel Bandwidth: 5MHz	Channel	CH 132647 : 1777.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-48.25	-13.00	-35.25	1.27 H	248	47.25	-95.50
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-46.92	-13.00	-33.92	2.24 V	79	48.58	-95.50

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66 Channel Bandwidth: 20MHz	Channel	CH 132072 : 1720 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-48.40	-13.00	-35.40	1.21 H	248	47.33	-95.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-47.02	-13.00	-34.02	2.23 V	81	48.71	-95.73

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66 Channel Bandwidth: 20MHz	Channel	CH 132322 : 1745 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-48.26	-13.00	-35.26	1.30 H	243	47.46	-95.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-46.98	-13.00	-33.98	2.21 V	78	48.74	-95.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66 Channel Bandwidth: 20MHz	Channel	CH 132572 : 1770 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-48.31	-13.00	-35.31	1.26 H	241	47.25	-95.56
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-46.97	-13.00	-33.97	2.20 V	83	48.59	-95.56

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.6 LTE Band 71

RF Mode	LTE Band 71 Channel Bandwidth: 5MHz	Channel	CH 133147 : 665.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-51.50	-13.00	-38.50	2.23 H	279	50.16	-101.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-46.02	-13.00	-33.02	2.32 V	354	55.64	-101.66

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 71 Channel Bandwidth: 5MHz	Channel	CH 133297 : 680.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-51.30	-13.00	-38.30	2.21 H	272	50.33	-101.63
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-45.88	-13.00	-32.88	2.38 V	351	55.75	-101.63

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 71 Channel Bandwidth: 5MHz	Channel	CH 133447 : 695.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-51.34	-13.00	-38.34	2.25 H	276	50.18	-101.52
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-45.86	-13.00	-32.86	2.36 V	355	55.66	-101.52

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 71 Channel Bandwidth: 20MHz	Channel	CH 133222 : 673 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-51.43	-13.00	-38.43	2.22 H	284	50.25	-101.68
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-46.04	-13.00	-33.04	2.36 V	348	55.64	-101.68

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 71 Channel Bandwidth: 20MHz	Channel	CH 133297 : 680.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-51.30	-13.00	-38.30	2.21 H	273	50.33	-101.63
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-45.80	-13.00	-32.80	2.29 V	346	55.83	-101.63

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 71 Channel Bandwidth: 20MHz	Channel	CH 133372 : 688 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-51.47	-13.00	-38.47	2.15 H	282	50.11	-101.58
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-45.98	-13.00	-32.98	2.30 V	352	55.60	-101.58

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

7.8 Frequency Stability

Environmental Conditions:	25°C, 60% RH	Tested By:	Willy Cheng
---------------------------	--------------	------------	-------------

7.8.1 LTE Band 2

LTE Band 2, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 18607 (1850.7 MHz)		CH 19193 (1909.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1850.700003	0.0016	1909.300004	0.0021
120	1850.699997	-0.0016	1909.3	0
138	1850.700001	0.0005	1909.3	0

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18607 (1850.7 MHz)		CH 19193 (1909.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700003	0.0016	1909.300007	0.0037
-20	1850.700001	0.0005	1909.300001	0.0005
-10	1850.699996	-0.0022	1909.299991	-0.0047
0	1850.700001	0.0005	1909.300006	0.0031
10	1850.699994	-0.0032	1909.299994	-0.0031
20	1850.699993	-0.0038	1909.299993	-0.0037
30	1850.699994	-0.0032	1909.299992	-0.0042
40	1850.700005	0.0027	1909.300005	0.0026
50	1850.7	0	1909.299999	-0.0005

LTE Band 2, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 18615 (1851.5 MHz)		CH 19185 (1908.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1851.499999	-0.0005	1908.499998	-0.001
120	1851.500007	0.0038	1908.500005	0.0026
138	1851.500005	0.0027	1908.500008	0.0042

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18615 (1851.5 MHz)		CH 19185 (1908.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1851.500005	0.0027	1908.50001	0.0052
-20	1851.499991	-0.0049	1908.49999	-0.0052
-10	1851.500006	0.0032	1908.500008	0.0042
0	1851.499991	-0.0049	1908.499992	-0.0042
10	1851.500008	0.0043	1908.500006	0.0031
20	1851.500003	0.0016	1908.499998	-0.001
30	1851.500009	0.0049	1908.500004	0.0021
40	1851.499996	-0.0022	1908.499993	-0.0037
50	1851.499996	-0.0022	1908.5	0

LTE Band 2, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 18625 (1852.5 MHz)		CH 19175 (1907.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1852.499993	-0.0038	1907.499991	-0.0047
120	1852.500001	0.0005	1907.5	0
138	1852.500007	0.0038	1907.500004	0.0021

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18625 (1852.5 MHz)		CH 19175 (1907.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.49999	-0.0054	1907.499992	-0.0042
-20	1852.499997	-0.0016	1907.499996	-0.0021
-10	1852.500006	0.0032	1907.500005	0.0026
0	1852.499999	-0.0005	1907.500001	0.0005
10	1852.500008	0.0043	1907.500006	0.0031
20	1852.500001	0.0005	1907.499999	-0.0005
30	1852.499991	-0.0049	1907.499992	-0.0042
40	1852.49999	-0.0054	1907.499995	-0.0026
50	1852.500001	0.0005	1907.499998	-0.001

LTE Band 2, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 18650 (1855 MHz)		CH 19150 (1905 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1855	0	1904.999997	-0.0016
120	1854.999996	-0.0022	1904.999999	-0.0005
138	1854.999996	-0.0022	1904.999996	-0.0021

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18650 (1855 MHz)		CH 19150 (1905 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1854.999998	-0.0011	1905.000001	0.0005
-20	1855.000004	0.0022	1905.000001	0.0005
-10	1855.000002	0.0011	1904.999997	-0.0016
0	1855.000008	0.0043	1905.000001	0.0052
10	1854.999997	-0.0016	1904.999999	-0.0005
20	1854.999991	-0.0049	1904.999994	-0.0031
30	1854.999999	-0.0054	1904.999999	-0.0052
40	1854.999997	-0.0016	1905.000001	0.0005
50	1855.000009	0.0049	1905.000001	0.0052

LTE Band 2, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 18675 (1857.5 MHz)		CH 19125 (1902.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1857.50001	0.0054	1902.500006	0.0032
120	1857.499995	-0.0027	1902.49999	-0.0053
138	1857.500003	0.0016	1902.500006	0.0032

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18675 (1857.5 MHz)		CH 19125 (1902.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1857.500007	0.0038	1902.50001	0.0053
-20	1857.500008	0.0043	1902.500006	0.0032
-10	1857.5	0	1902.500001	0.0005
0	1857.499994	-0.0032	1902.499993	-0.0037
10	1857.499999	-0.0005	1902.500001	0.0005
20	1857.500006	0.0032	1902.50001	0.0053
30	1857.500004	0.0022	1902.500001	0.0005
40	1857.5	0	1902.499998	-0.0011
50	1857.499991	-0.0048	1902.499993	-0.0037

LTE Band 2, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 18700 (1860 MHz)		CH 19100 (1900 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1860.000005	0.0027	1900.000001	0.0005
120	1860.000003	0.0016	1900.000006	0.0032
138	1859.999991	-0.0048	1899.999996	-0.0021

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18700 (1860 MHz)		CH 19100 (1900 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1860.000003	0.0016	1900.000007	0.0037
-20	1859.999998	-0.0011	1899.999997	-0.0016
-10	1860.000008	0.0043	1900.000004	0.0021
0	1859.999996	-0.0022	1900	0
10	1859.999995	-0.0027	1899.999998	-0.0011
20	1859.999996	-0.0022	1899.999997	-0.0016
30	1859.999991	-0.0048	1899.999992	-0.0042
40	1860.000006	0.0032	1900.000008	0.0042
50	1859.99999	-0.0054	1899.999992	-0.0042

7.8.2 LTE Band 4

LTE Band 4, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 19957 (1710.7 MHz)		CH 20393 (1754.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1710.699993	-0.0041	1754.299996	-0.0023
120	1710.699999	-0.0058	1754.299993	-0.004
138	1710.700002	0.0012	1754.300006	0.0034

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 19957 (1710.7 MHz)		CH 20393 (1754.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.699991	-0.0053	1754.299993	-0.004
-20	1710.700002	0.0012	1754.299999	-0.0006
-10	1710.699994	-0.0035	1754.299997	-0.0017
0	1710.700009	0.0053	1754.300007	0.004
10	1710.7	0	1754.299998	-0.0011
20	1710.700008	0.0047	1754.300008	0.0046
30	1710.700006	0.0035	1754.30001	0.0057
40	1710.700002	0.0012	1754.300004	0.0023
50	1710.700007	0.0041	1754.300004	0.0023

LTE Band 4, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 19965 (1711.5 MHz)		CH 20385 (1753.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1711.500004	0.0023	1753.500006	0.0034
120	1711.500001	0.0058	1753.500009	0.0051
138	1711.500004	0.0023	1753.500002	0.0011

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 19965 (1711.5 MHz)		CH 20385 (1753.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.499995	-0.0029	1753.499999	-0.0006
-20	1711.500004	0.0023	1753.5	0
-10	1711.500008	0.0047	1753.500001	0.0057
0	1711.500001	0.0058	1753.500007	0.004
10	1711.500007	0.0041	1753.500001	0.0057
20	1711.500002	0.0012	1753.499998	-0.0011
30	1711.499996	-0.0023	1753.499996	-0.0023
40	1711.499992	-0.0047	1753.499992	-0.0046
50	1711.499991	-0.0053	1753.499991	-0.0051

LTE Band 4, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 19975 (1712.5 MHz)		CH 20375 (1752.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1712.500007	0.0041	1752.500003	0.0017
120	1712.500008	0.0047	1752.500005	0.0029
138	1712.499991	-0.0053	1752.499995	-0.0029

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 19975 (1712.5 MHz)		CH 20375 (1752.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.499993	-0.0041	1752.499991	-0.0051
-20	1712.499999	-0.0006	1752.499998	-0.0011
-10	1712.500002	0.0012	1752.500006	0.0034
0	1712.500009	0.0053	1752.500008	0.0046
10	1712.499998	-0.0012	1752.499999	-0.0006
20	1712.49999	-0.0058	1752.499992	-0.0046
30	1712.499994	-0.0035	1752.499994	-0.0034
40	1712.499993	-0.0041	1752.499991	-0.0051
50	1712.500003	0.0018	1752.500006	0.0034

LTE Band 4, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 20000 (1715 MHz)		CH 20350 (1750 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1715.000002	0.0012	1749.999999	-0.0006
120	1714.999992	-0.0047	1749.999992	-0.0046
138	1714.999994	-0.0035	1749.999998	-0.0011

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20000 (1715 MHz)		CH 20350 (1750 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1715.000005	0.0029	1750.000009	0.0051
-20	1715	0	1749.999995	-0.0029
-10	1715.000004	0.0023	1749.999999	-0.0006
0	1714.999992	-0.0047	1749.999992	-0.0046
10	1714.999991	-0.0052	1749.999992	-0.0046
20	1714.999996	-0.0023	1749.999993	-0.004
30	1714.99999	-0.0058	1749.999994	-0.0034
40	1714.999996	-0.0023	1749.999996	-0.0023
50	1714.999994	-0.0035	1749.999991	-0.0051

LTE Band 4, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 20025 (1717.5 MHz)		CH 20325 (1747.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1717.500009	0.0052	1747.500005	0.0029
120	1717.500002	0.0012	1747.500006	0.0034
138	1717.499993	-0.0041	1747.499996	-0.0023

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20025 (1717.5 MHz)		CH 20325 (1747.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.499992	-0.0047	1747.499995	-0.0029
-20	1717.500008	0.0047	1747.500007	0.004
-10	1717.499994	-0.0035	1747.49999	-0.0057
0	1717.499991	-0.0052	1747.499992	-0.0046
10	1717.5	0	1747.499999	-0.0006
20	1717.500003	0.0017	1747.500005	0.0029
30	1717.50001	0.0058	1747.500009	0.0052
40	1717.499999	-0.0006	1747.5	0
50	1717.500006	0.0035	1747.500008	0.0046

LTE Band 4, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 20050 (1720 MHz)		CH 20300 (1745 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1719.999995	-0.0029	1744.999996	-0.0023
120	1720.000009	0.0052	1745.000007	0.004
138	1720.000004	0.0023	1745.000005	0.0029

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20050 (1720 MHz)		CH 20300 (1745 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1719.999998	-0.0012	1745.000003	0.0017
-20	1719.999993	-0.0041	1744.99999	-0.0057
-10	1719.999993	-0.0041	1744.99999	-0.0057
0	1720.000009	0.0052	1745.00001	0.0057
10	1720.000001	0.0006	1745.000004	0.0023
20	1720.000005	0.0029	1745.000001	0.0006
30	1719.999993	-0.0041	1744.99999	-0.0057
40	1719.999991	-0.0052	1744.999991	-0.0052
50	1720.000006	0.0035	1745.000008	0.0046

7.8.3 LTE Band 5

LTE Band 5, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 20407 (824.7 MHz)		CH 20643 (848.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	824.699997	-0.0036	848.299992	-0.0094
120	824.699991	-0.0109	848.299991	-0.0106
138	824.69999	-0.0121	848.299991	-0.0106

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20407 (824.7 MHz)		CH 20643 (848.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	824.70001	0.0121	848.300007	0.0083
-20	824.700007	0.0085	848.300004	0.0047
-10	824.700008	0.0097	848.30001	0.0118
0	824.70001	0.0121	848.300007	0.0083
10	824.699992	-0.0097	848.299991	-0.0106
20	824.699997	-0.0036	848.3	0
30	824.699995	-0.0061	848.299997	-0.0035
40	824.700001	0.0012	848.300001	0.0012
50	824.700004	0.0049	848.299999	-0.0012

LTE Band 5, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 20415 (825.5 MHz)		CH 20635 (847.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	825.499996	-0.0048	847.499998	-0.0024
120	825.5	0	847.500002	0.0024
138	825.499993	-0.0085	847.499998	-0.0024

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20415 (825.5 MHz)		CH 20635 (847.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	825.500003	0.0036	847.500001	0.0012
-20	825.500003	0.0036	847.500005	0.0059
-10	825.500008	0.0097	847.50001	0.0118
0	825.499996	-0.0048	847.499996	-0.0047
10	825.5	0	847.5	0
20	825.500001	0.0012	847.499996	-0.0047
30	825.499993	-0.0085	847.499991	-0.0106
40	825.500007	0.0085	847.500003	0.0035
50	825.499992	-0.0097	847.499991	-0.0106

LTE Band 5, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 20425 (826.5 MHz)		CH 20625 (846.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	826.499999	-0.0012	846.499999	-0.0012
120	826.499997	-0.0036	846.5	0
138	826.499993	-0.0085	846.499998	-0.0024

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20425 (826.5 MHz)		CH 20625 (846.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	826.500004	0.0048	846.500002	0.0024
-20	826.499998	-0.0024	846.500001	0.0012
-10	826.499997	-0.0036	846.499996	-0.0047
0	826.500004	0.0048	846.500005	0.0059
10	826.499996	-0.0048	846.499996	-0.0047
20	826.499991	-0.0109	846.499994	-0.0071
30	826.500004	0.0048	846.500009	0.0106
40	826.5	0	846.500004	0.0047
50	826.5	0	846.500004	0.0047

LTE Band 5, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 20450 (829 MHz)		CH 20600 (844 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	828.999996	-0.0048	843.999999	-0.0012
120	828.999996	-0.0048	843.999996	-0.0047
138	828.999998	-0.0024	844	0

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20450 (829 MHz)		CH 20600 (844 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	828.999998	-0.0024	844	0
-20	828.999997	-0.0036	843.999998	-0.0024
-10	829.000003	0.0036	844.000004	0.0047
0	829.000006	0.0072	844.000002	0.0024
10	828.999999	-0.0012	844	0
20	829.000002	0.0024	844.000005	0.0059
30	828.999995	-0.006	843.999991	-0.0107
40	829.000004	0.0048	844.000006	0.0071
50	828.999997	-0.0036	843.999997	-0.0036

7.8.4 LTE Band 12

LTE Band 12, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 23017 (699.7 MHz)		CH 23173 (715.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	699.700007	0.01	715.300002	0.0028
120	699.700006	0.0086	715.300005	0.007
138	699.699997	-0.0043	715.299995	-0.007

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23017 (699.7 MHz)		CH 23173 (715.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	699.699996	-0.0057	715.299995	-0.007
-20	699.699992	-0.0114	715.299997	-0.0042
-10	699.699994	-0.0086	715.299991	-0.0126
0	699.7	0	715.299998	-0.0028
10	699.699997	-0.0043	715.299994	-0.0084
20	699.700004	0.0057	715.300001	0.0014
30	699.700007	0.01	715.300001	0.014
40	699.699999	-0.0014	715.299996	-0.0056
50	699.700003	0.0043	715.300002	0.0028

LTE Band 12, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 23025 (700.5 MHz)		CH 23165 (714.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	700.499995	-0.0071	714.499995	-0.007
120	700.500005	0.0071	714.500004	0.0056
138	700.499998	-0.0029	714.499994	-0.0084

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23025 (700.5 MHz)		CH 23165 (714.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	700.499993	-0.01	714.499995	-0.007
-20	700.500007	0.01	714.500003	0.0042
-10	700.500002	0.0029	714.500007	0.0098
0	700.500002	0.0029	714.499998	-0.0028
10	700.499998	-0.0029	714.499999	-0.0014
20	700.499998	-0.0029	714.499997	-0.0042
30	700.499995	-0.0071	714.499996	-0.0056
40	700.500001	0.0014	714.500006	0.0084
50	700.500003	0.0043	714.500007	0.0098

LTE Band 12, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 23035 (701.5 MHz)		CH 23155 (713.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	701.50001	0.0143	713.500007	0.0098
120	701.499999	-0.0014	713.499999	-0.0014
138	701.500008	0.0114	713.500004	0.0056

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23035 (701.5 MHz)		CH 23155 (713.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	701.500001	0.0014	713.499998	-0.0028
-20	701.500005	0.0071	713.500001	0.0014
-10	701.500004	0.0057	713.500007	0.0098
0	701.499993	-0.01	713.499991	-0.0126
10	701.499993	-0.01	713.499995	-0.007
20	701.500003	0.0043	713.500005	0.007
30	701.500002	0.0029	713.500004	0.0056
40	701.499999	-0.0014	713.499997	-0.0042
50	701.499999	-0.0014	713.499994	-0.0084

LTE Band 12, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 23060 (704 MHz)		CH 23130 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	704.000001	0.0014	710.999999	-0.0014
120	704.000001	0.0014	711.000002	0.0028
138	704.000004	0.0057	711.000004	0.0056

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23060 (704 MHz)		CH 23130 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	703.99999	-0.0142	710.999991	-0.0127
-20	703.999993	-0.0099	710.999997	-0.0042
-10	704.000005	0.0071	711.000005	0.007
0	704.000009	0.0128	711.000006	0.0084
10	704.000004	0.0057	711.000006	0.0084
20	703.999999	-0.0014	710.999996	-0.0056
30	704.000004	0.0057	711.000001	0.0014
40	703.999998	-0.0028	711	0
50	703.999996	-0.0057	710.999997	-0.0042

7.8.5 LTE Band 66

LTE Band 66, Channel Bandwidth: 1.4 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 131979 (1710.7 MHz)		CH 132665 (1779.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1710.699992	-0.0047	1779.299991	-0.0051
120	1710.699999	-0.0006	1779.299998	-0.0011
138	1710.699996	-0.0023	1779.299997	-0.0017

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 131979 (1710.7 MHz)		CH 132665 (1779.3 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.700002	0.0012	1779.299997	-0.0017
-20	1710.699999	-0.0006	1779.300003	0.0017
-10	1710.699991	-0.0053	1779.299996	-0.0022
0	1710.699994	-0.0035	1779.299991	-0.0051
10	1710.700001	0.0006	1779.300005	0.0028
20	1710.700009	0.0053	1779.300006	0.0034
30	1710.699997	-0.0018	1779.299994	-0.0034
40	1710.700006	0.0035	1779.300002	0.0011
50	1710.699999	-0.0006	1779.300003	0.0017

LTE Band 66, Channel Bandwidth: 3 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 131987 (1711.5 MHz)		CH 132657 (1778.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1711.499995	-0.0029	1778.499991	-0.0051
120	1711.500008	0.0047	1778.500008	0.0045
138	1711.500004	0.0023	1778.500006	0.0034

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 131987 (1711.5 MHz)		CH 132657 (1778.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.500003	0.0018	1778.500006	0.0034
-20	1711.5	0	1778.499998	-0.0011
-10	1711.5	0	1778.499996	-0.0022
0	1711.499996	-0.0023	1778.499994	-0.0034
10	1711.500002	0.0012	1778.500004	0.0022
20	1711.500005	0.0029	1778.500006	0.0034
30	1711.499991	-0.0053	1778.499999	-0.0056
40	1711.499994	-0.0035	1778.499998	-0.0011
50	1711.500001	0.0006	1778.500002	0.0011

LTE Band 66, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 131997 (1712.5 MHz)		CH 132647 (1777.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1712.50001	0.0058	1777.50001	0.0056
120	1712.500003	0.0018	1777.500007	0.0039
138	1712.499992	-0.0047	1777.499992	-0.0045

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 131997 (1712.5 MHz)		CH 132647 (1777.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.500005	0.0029	1777.500005	0.0028
-20	1712.499995	-0.0029	1777.499998	-0.0011
-10	1712.499994	-0.0035	1777.499991	-0.0051
0	1712.500004	0.0023	1777.500003	0.0017
10	1712.500004	0.0023	1777.500003	0.0017
20	1712.5	0	1777.499995	-0.0028
30	1712.5	0	1777.500002	0.0011
40	1712.500002	0.0012	1777.500007	0.0039
50	1712.500008	0.0047	1777.500006	0.0034

LTE Band 66, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 132022 (1715 MHz)		CH 132622 (1775 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1715.000005	0.0029	1775.000002	0.0011
120	1714.999992	-0.0047	1774.999993	-0.0039
138	1715.000001	0.0006	1775.000004	0.0023

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 132022 (1715 MHz)		CH 132622 (1775 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1714.999995	-0.0029	1774.99999	-0.0056
-20	1714.999994	-0.0035	1774.999996	-0.0023
-10	1715.000001	0.0006	1774.999997	-0.0017
0	1714.999993	-0.0041	1774.999996	-0.0023
10	1714.999993	-0.0041	1774.999991	-0.0051
20	1714.999999	-0.0006	1774.999996	-0.0023
30	1715.000007	0.0041	1775.000002	0.0011
40	1714.99999	-0.0058	1774.999995	-0.0028
50	1714.999992	-0.0047	1774.999992	-0.0045

LTE Band 66, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 132047 (1717.5 MHz)		CH 132597 (1772.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1717.500003	0.0017	1772.500006	0.0034
120	1717.499998	-0.0012	1772.499999	-0.0006
138	1717.500002	0.0012	1772.500006	0.0034

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 132047 (1717.5 MHz)		CH 132597 (1772.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.500003	0.0017	1772.500005	0.0028
-20	1717.500001	0.0006	1772.499996	-0.0023
-10	1717.499997	-0.0017	1772.499994	-0.0034
0	1717.500008	0.0047	1772.500008	0.0045
10	1717.500002	0.0012	1772.500007	0.0039
20	1717.500001	0.0006	1772.500002	0.0011
30	1717.500008	0.0047	1772.500001	0.0056
40	1717.499995	-0.0029	1772.499992	-0.0045
50	1717.500005	0.0029	1772.500009	0.0051

LTE Band 66, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 132072 (1720 MHz)		CH 132572 (1770 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	1719.999993	-0.0041	1769.999995	-0.0028
120	1719.999992	-0.0047	1769.999994	-0.0034
138	1719.999993	-0.0041	1769.999993	-0.004

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 132072 (1720 MHz)		CH 132572 (1770 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1720.00001	0.0058	1770.00001	0.0056
-20	1720.000004	0.0023	1770.000005	0.0028
-10	1720.000009	0.0052	1770.00001	0.0056
0	1719.999991	-0.0052	1769.999994	-0.0034
10	1720.000009	0.0052	1770.000005	0.0028
20	1720.00001	0.0058	1770.000007	0.004
30	1720.000001	0.0006	1770.000004	0.0023
40	1720.00001	0.0058	1770.000005	0.0028
50	1719.999994	-0.0035	1769.999995	-0.0028

7.8.6 LTE Band 71

LTE Band 71, Channel Bandwidth: 5 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 133147 (665.5 MHz)		CH 133447 (695.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	665.500001	0.0015	695.499997	-0.0043
120	665.499993	-0.0105	695.499996	-0.0058
138	665.500008	0.012	695.500006	0.0086

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 133147 (665.5 MHz)		CH 133447 (695.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	665.499998	-0.003	695.499995	-0.0072
-20	665.500007	0.0105	695.500009	0.0129
-10	665.500005	0.0075	695.500007	0.0101
0	665.500006	0.009	695.500006	0.0086
10	665.500003	0.0045	695.500006	0.0086
20	665.499992	-0.012	695.499993	-0.0101
30	665.500002	0.003	695.500006	0.0086
40	665.500004	0.006	695.500007	0.0101
50	665.500002	0.003	695.499998	-0.0029

LTE Band 71, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 133172 (668 MHz)		CH 133422 (693 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	668.000003	0.0045	693	0
120	667.999994	-0.009	692.999998	-0.0029
138	668.000003	0.0045	692.999998	-0.0029

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 133172 (668 MHz)		CH 133422 (693 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	668.000007	0.0105	693.000009	0.013
-20	668.000009	0.0135	693.000005	0.0072
-10	668.000006	0.009	693.000009	0.013
0	668.000001	0.0015	693.000002	0.0029
10	667.999992	-0.012	692.999994	-0.0087
20	667.999991	-0.0135	692.99999	-0.0144
30	667.99999	-0.015	692.99999	-0.0144
40	668.000006	0.009	693.000001	0.0014
50	668.000006	0.009	693.000009	0.013

LTE Band 71, Channel Bandwidth: 15 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 133197 (670.5 MHz)		CH 133397 (690.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	670.500003	0.0045	690.499998	-0.0029
120	670.500009	0.0134	690.500008	0.0116
138	670.499991	-0.0134	690.499999	-0.0145

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 133197 (670.5 MHz)		CH 133397 (690.5 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	670.499996	-0.006	690.499996	-0.0058
-20	670.500007	0.0104	690.500003	0.0043
-10	670.499996	-0.006	690.499996	-0.0058
0	670.500009	0.0134	690.500001	0.0145
10	670.499993	-0.0104	690.499993	-0.0101
20	670.500006	0.0089	690.500001	0.0145
30	670.499996	-0.006	690.499996	-0.0058
40	670.499995	-0.0075	690.499999	-0.0014
50	670.500006	0.0089	690.500009	0.013

LTE Band 71, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vac)	CH 133222 (673 MHz)		CH 133372 (688 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
102	673.000005	0.0074	688.000009	0.0131
120	673.000001	0.0015	688	0
138	673.000002	0.003	687.999999	-0.0015

Note: The applicant defined the normal working voltage is from 102 to 138 Vac.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 133222 (673 MHz)		CH 133372 (688 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	673.000003	0.0045	688.000002	0.0029
-20	673.000004	0.0059	688.000007	0.0102
-10	673.000007	0.0104	688.000009	0.0131
0	672.999993	-0.0104	687.999995	-0.0073
10	672.999996	-0.0059	688.000001	0.0015
20	673.000008	0.0119	688.000001	0.0145
30	672.999992	-0.0119	687.999996	-0.0058
40	673.000004	0.0059	688.000009	0.0131
50	672.999994	-0.0089	687.999998	-0.0029

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---