





Test Mode : 2TX 11be40 CH102 NSS1 MCS0
Pol : Vertical Detector : Peak

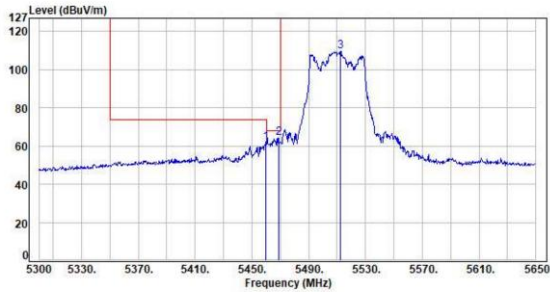

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5459.60	-0.74	62.72	61.98	74.00	-12.02	Peak	100	134	P
2	5468.70	-0.68	65.00	64.32	74.00	-9.68	Peak	100	134	P
3	5512.10	-0.52	110.34	109.82	200.00	-90.18	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH102 NSS1 MCS0
Pol : Vertical Detector : Average

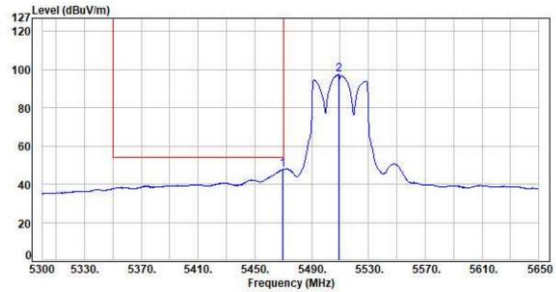

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5469.75	-0.68	48.38	47.70	74.00	-26.30	Average	100	134	P
2	5508.95	-0.52	97.91	97.39	200.00	-102.61	Average	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Peak

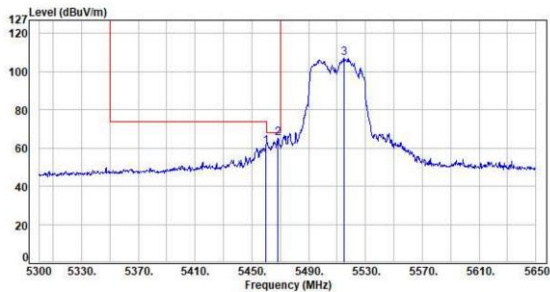

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5459.95	-0.74	61.79	61.05	74.00	-12.95	Peak	100	143	P
2	5468.35	-0.68	65.67	64.99	74.00	-9.01	Peak	100	143	P
3	5514.90	-0.53	107.51	106.98	200.00	-93.02	Peak	100	143	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Average

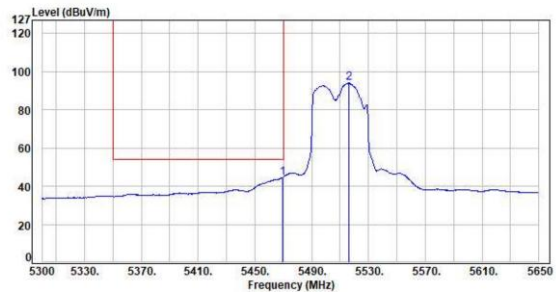


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5469.75	-0.68	45.30	44.62	74.00	-29.38	Average	100	143	P
2	5515.95	-0.53	94.53	94.00	200.00	-106.00	Average	100	143	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH118 NSS1 MCS0
Pol : Vertical Detector : Peak

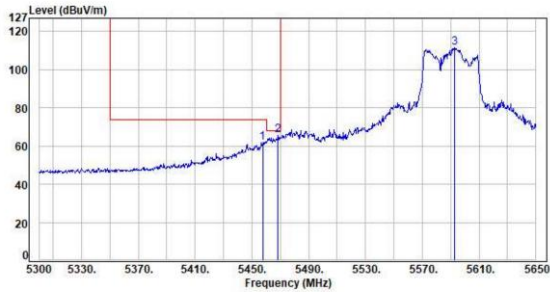

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5457.50	-0.76	62.50	61.74	74.00	-12.26	Peak	100	145	P
2	5468.35	-0.68	66.23	65.55	68.20	-2.65	Peak	100	145	P
3	5592.95	-0.52	111.83	111.31	200.00	-88.69	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH118 NSS1 MCS0
Pol : Vertical Detector : Average

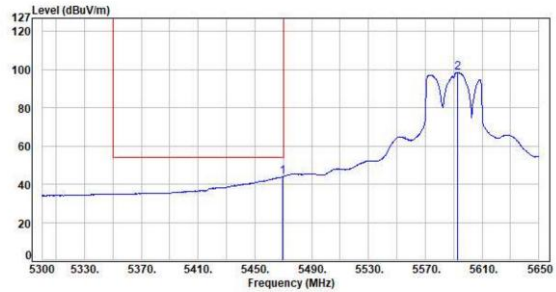

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5469.75	-0.68	44.53	43.85	54.00	-10.15	Average	100	145	P
2	5592.95	-0.52	99.05	98.53	200.00	-101.47	Average	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH118 NSS1 MCS0
Pol : Horizontal Detector : Peak

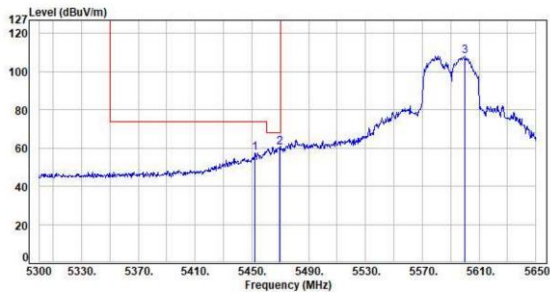

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5452.25	-0.78	58.22	57.44	74.00	-16.56	Peak	100	150	P
2	5469.75	-0.68	61.03	60.35	68.20	-7.85	Peak	100	150	P
3	5599.95	-0.52	108.93	108.41	200.00	-91.59	Peak	100	150	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH118 NSS1 MCS0
Pol : Horizontal Detector : Average

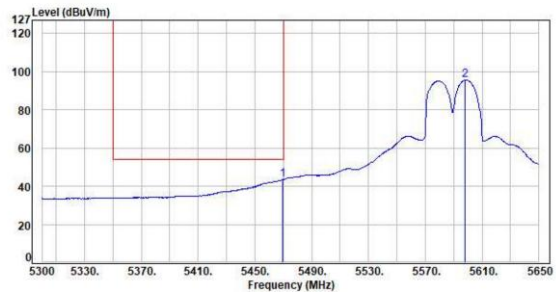


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5469.75	-0.68	44.26	43.58	54.00	-10.42	Average	100	150	P
2	5598.20	-0.52	96.27	95.75	200.00	-104.25	Average	100	150	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be40 CH134 NSS1 MCS0
Pol : Vertical

Detector : Peak

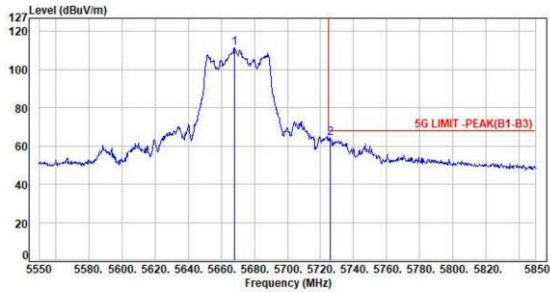


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5667.90	-0.52	111.90	111.46	200.00	-88.54	Peak	100	136	P
2	5725.80	-0.39	64.52	64.13	68.20	-4.07	Peak	100	136	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH134 NSS1 MCS0
Pol : Vertical

Detector : Average

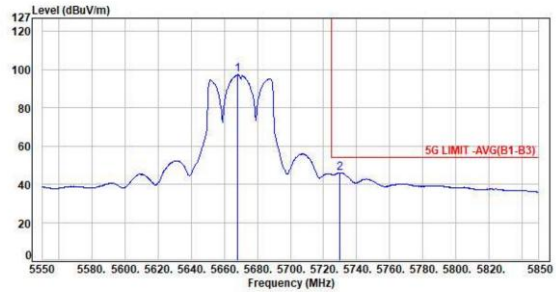


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5668.20	-0.52	97.96	97.44	200.00	-102.56	Average	100	136	P
2	5729.70	-0.40	46.48	46.08	54.00	-7.92	Average	100	136	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH134 NSS1 MCS0
Pol : Horizontal

Detector : Peak

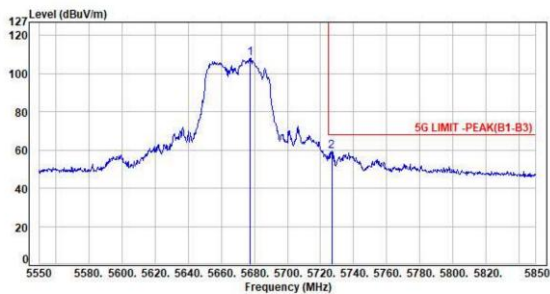


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5677.50	-0.46	108.56	108.10	200.00	-91.90	Peak	100	140	P
2	5726.70	-0.39	59.87	59.48	68.20	-8.72	Peak	100	140	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH134 NSS1 MCS0
Pol : Horizontal

Detector : Average

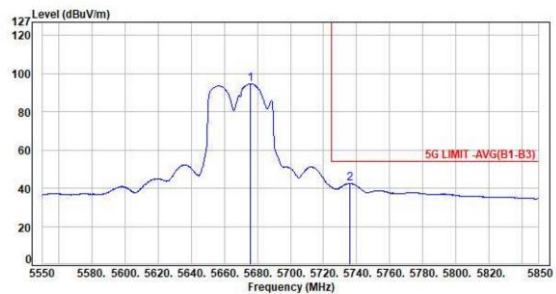


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5675.70	-0.48	95.20	94.72	200.00	-105.28	Average	100	140	P
2	5736.00	-0.41	43.00	42.59	54.00	-11.41	Average	100	140	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH106 NSS1 MCS0
Pol : Vertical Detector : Peak

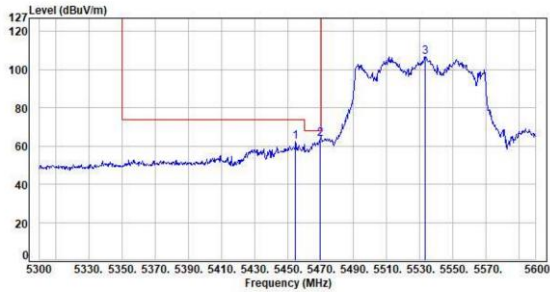

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5454.80	-0.76	62.85	62.09	74.00	-11.91	Peak	100	145	P
2	5469.50	-0.68	64.27	63.59	68.20	-4.61	Peak	100	145	P
3	5533.10	-0.58	107.34	106.76	200.00	-93.24	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH106 NSS1 MCS0
Pol : Vertical Detector : Average

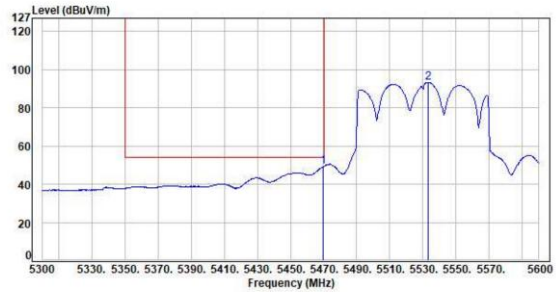

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5469.50	-0.68	50.14	49.46	54.00	-4.54	Average	100	145	P
2	5533.10	-0.58	93.82	93.24	200.00	-106.76	Average	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Peak

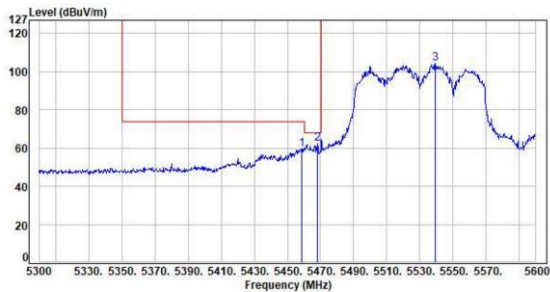

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5458.70	-0.75	60.22	59.47	74.00	-14.53	Peak	100	154	P
2	5468.30	-0.68	62.97	62.29	68.20	-5.91	Peak	100	154	P
3	5539.10	-0.59	104.67	104.08	200.00	-95.92	Peak	100	154	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Average

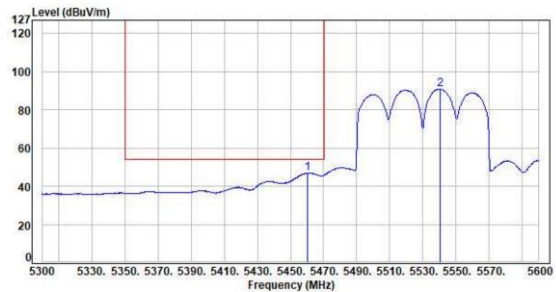


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5468.30	-0.74	47.68	46.94	54.00	-7.06	Average	100	154	P
2	5539.10	-0.59	91.48	90.89	200.00	-109.11	Average	100	154	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH122 NSS1 MCS0
Pol : Vertical Detector : Peak

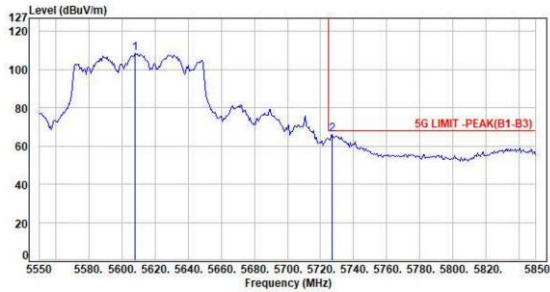

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5608.00	-0.54	109.11	108.57	200.00	-91.43	Peak	100	134	P
2	5726.00	-0.39	66.38	65.99	68.20	-2.21	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH122 NSS1 MCS0
Pol : Vertical Detector : Average

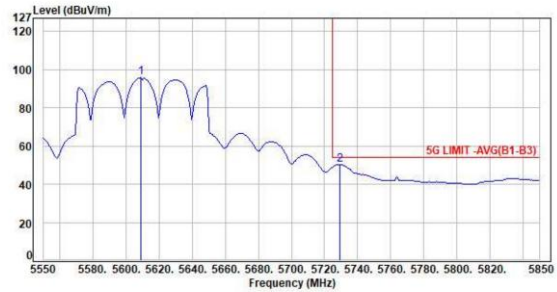

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5609.10	-0.54	96.50	95.96	200.00	-104.04	Average	100	134	P
2	5729.00	-0.40	50.73	50.33	54.00	-3.67	Average	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH122 NSS1 MCS0
Pol : Horizontal Detector : Peak

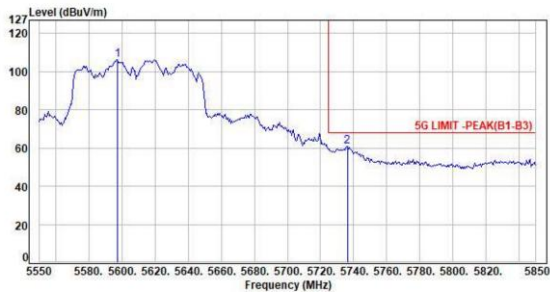

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5597.55	-0.52	106.64	106.12	200.00	-93.88	Peak	100	141	P
2	5736.15	-0.41	61.29	60.88	68.20	-7.32	Peak	100	141	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH122 NSS1 MCS0
Pol : Horizontal Detector : Average

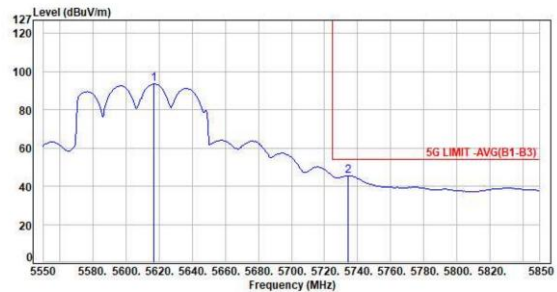


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5616.00	-0.55	94.18	93.63	200.00	-106.37	Average	100	141	P
2	5733.95	-0.41	46.00	45.59	54.00	-8.41	Average	100	141	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH114 NSS1 MCS0
Pol : Vertical Detector : Peak

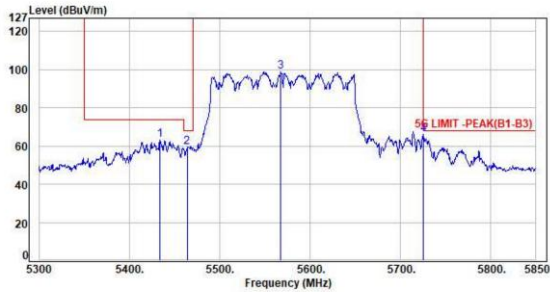

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5433.65	-0.90	64.29	63.39	74.00	-10.61	Peak	100	134	P
2	5463.90	-0.72	60.21	59.49	68.20	-8.71	Peak	100	134	P
3	5567.85	-0.57	99.48	98.91	200.00	-101.09	Peak	100	134	P
4	5725.70	-0.39	66.66	66.27	68.20	-1.93	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH114 NSS1 MCS0
Pol : Vertical Detector : Average

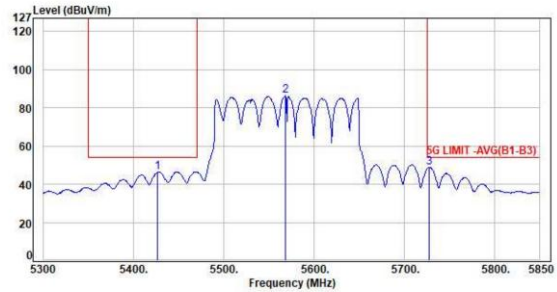

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5427.05	-0.93	47.43	46.50	54.00	-7.50	Average	100	134	P
2	5568.40	-0.57	86.78	86.21	200.00	-113.79	Average	100	134	P
3	5727.90	-0.40	49.33	48.93	54.00	-5.07	Average	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH114 NSS1 MCS0
Pol : Horizontal Detector : Peak

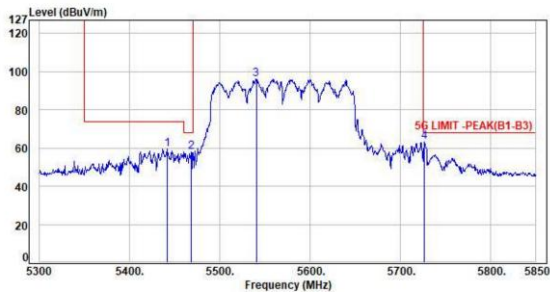

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5442.45	-0.84	60.35	59.51	74.00	-14.49	Peak	100	154	P
2	5468.85	-0.69	58.78	58.09	68.20	-10.11	Peak	100	154	P
3	5540.35	-0.58	96.87	96.29	200.00	-103.71	Peak	100	154	P
4	5726.80	-0.39	63.62	63.43	68.20	-4.77	Peak	100	154	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH114 NSS1 MCS0
Pol : Horizontal Detector : Average

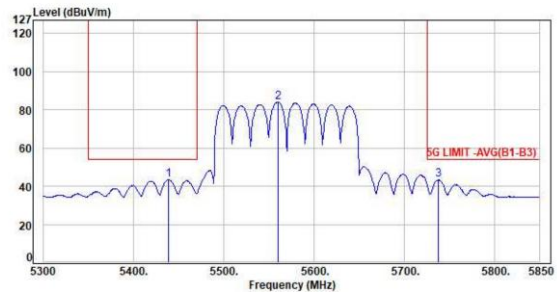

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5439.15	-0.86	44.33	43.47	54.00	-10.53	Average	100	154	P
2	5560.15	-0.59	84.67	84.08	200.00	-115.92	Average	100	154	P
3	5737.25	-0.41	43.75	43.34	54.00	-10.66	Average	100	154	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

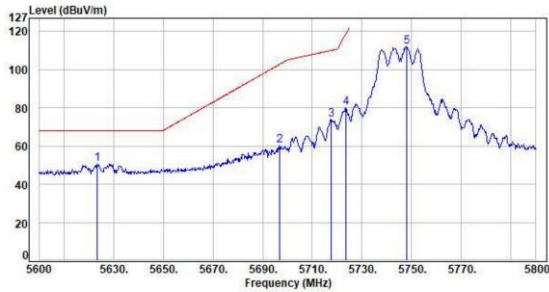

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5623.40	-0.57	51.18	50.61	68.20	-17.59	Peak	100	303	P
2	5697.00	-0.36	60.86	59.50	102.90	-42.40	Peak	100	303	P
3	5717.60	-0.38	74.26	73.88	110.13	-36.25	Peak	100	303	P
4	5723.40	-0.39	80.62	80.23	118.55	-38.32	Peak	100	303	P
5	5748.00	-0.45	112.38	111.93	200.00	-88.07	Peak	100	303	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

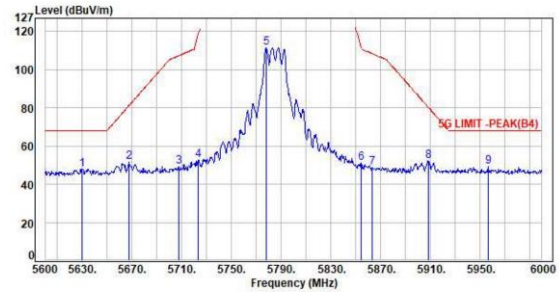

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5629.60	-0.58	48.55	47.97	68.20	-20.23	Peak	100	305	P
2	5668.00	-0.52	52.40	51.88	81.52	-29.64	Peak	100	305	P
3	5707.60	-0.36	49.51	49.15	107.33	-58.18	Peak	100	305	P
4	5723.60	-0.39	52.87	52.48	119.01	-66.53	Peak	100	305	P
5	5778.00	-0.39	111.94	111.55	200.00	-88.45	Peak	100	305	P
6	5854.40	-0.24	51.64	51.40	112.17	-60.77	Peak	100	305	P
7	5863.20	-0.21	49.18	48.97	108.50	-59.53	Peak	100	305	P
8	5908.40	-0.06	52.29	52.23	80.48	-28.25	Peak	100	305	P
9	5956.80	0.02	49.33	49.35	68.20	-18.85	Peak	100	305	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

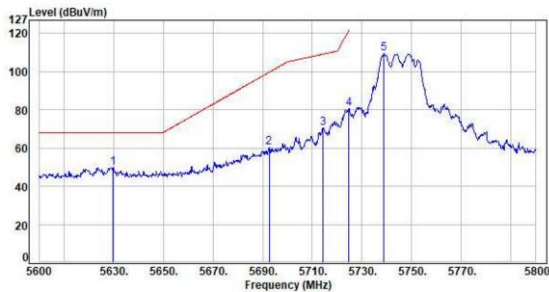

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5629.60	-0.58	50.47	49.89	68.20	-18.31	Peak	100	45	P
2	5692.60	-0.37	60.70	60.33	99.72	-39.39	Peak	100	45	P
3	5714.40	-0.37	70.84	70.47	109.23	-38.76	Peak	100	45	P
4	5724.00	-0.39	80.96	80.57	121.74	-41.17	Peak	100	45	P
5	5738.80	-0.42	110.12	109.70	200.00	-90.30	Peak	100	45	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

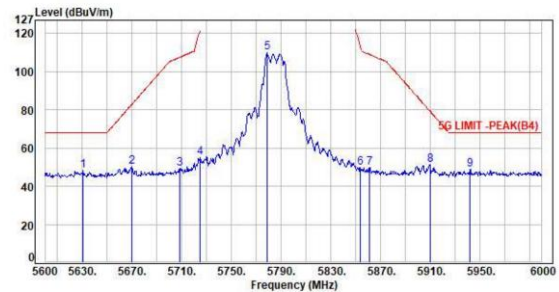

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5630.80	-0.58	48.86	48.28	68.20	-19.92	Peak	100	49	P
2	5670.00	-0.51	50.80	50.29	83.00	-32.71	Peak	100	49	P
3	5708.40	-0.36	49.60	49.24	107.55	-58.31	Peak	100	49	P
4	5724.40	-0.39	55.34	54.95	128.83	-65.88	Peak	100	49	P
5	5778.80	-0.39	110.35	109.96	200.00	-90.04	Peak	100	49	P
6	5854.00	-0.24	50.17	49.93	113.08	-63.15	Peak	100	49	P
7	5861.20	-0.23	50.04	49.81	109.06	-59.25	Peak	100	49	P
8	5910.00	-0.06	51.03	50.97	79.30	-28.33	Peak	100	49	P
9	5942.00	0.00	48.93	48.93	68.20	-19.27	Peak	100	49	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

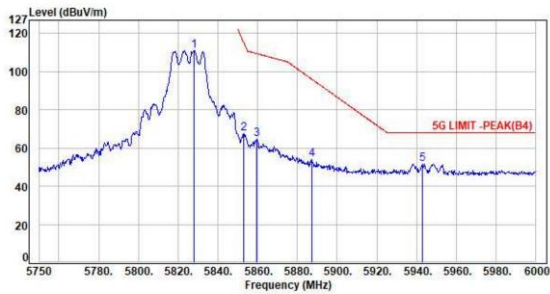

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5820.00	-0.30	111.39	111.09	200.00	-88.91	Peak	100	309	P
2	5853.00	-0.25	67.63	67.38	115.36	-47.98	Peak	100	309	P
3	5859.50	-0.23	64.70	64.47	109.54	-45.07	Peak	100	309	P
4	5887.25	-0.12	54.39	54.27	96.13	-41.86	Peak	100	309	P
5	5942.75	0.01	51.73	51.74	68.20	-16.46	Peak	100	309	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

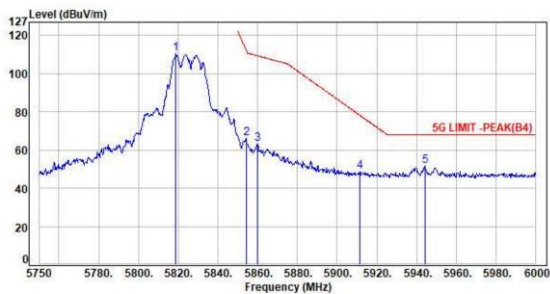

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5818.75	-0.31	110.77	110.46	200.00	-89.54	Peak	105	46	P
2	5854.25	-0.24	66.47	66.23	112.51	-46.28	Peak	105	46	P
3	5859.75	-0.23	63.42	63.19	109.47	-46.28	Peak	105	46	P
4	5911.50	-0.05	49.01	48.96	78.19	-29.23	Peak	105	46	P
5	5944.25	0.01	51.76	51.77	68.20	-16.43	Peak	105	46	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH149 NSS1 MCS0
Pol : Vertical Detector : Peak

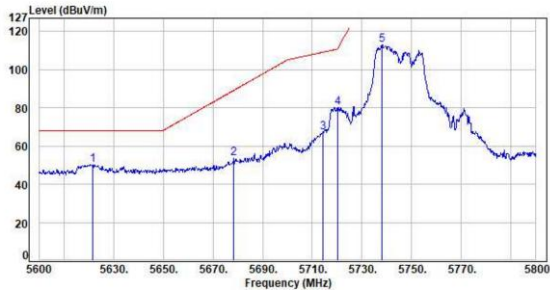

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5621.60	-0.56	50.83	50.27	68.20	-17.93	Peak	100	313	P
2	5678.40	-0.46	53.96	53.50	89.22	-35.72	Peak	100	313	P
3	5714.20	-0.37	67.46	67.09	109.18	-42.09	Peak	100	313	P
4	5720.20	-0.38	80.68	80.30	111.26	-30.96	Peak	100	313	P
5	5738.00	-0.42	113.54	113.12	200.00	-86.88	Peak	100	313	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH157 NSS1 MCS0
Pol : Vertical Detector : Peak

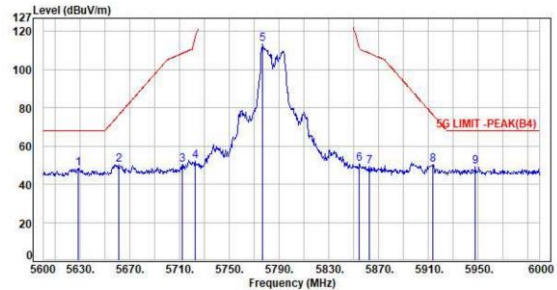

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5628.40	-0.58	48.71	48.13	68.20	-20.07	Peak	100	307	P
2	5668.00	-0.57	51.00	50.43	76.19	-25.76	Peak	100	307	P
3	5712.40	-0.36	58.34	49.98	108.67	-58.69	Peak	100	307	P
4	5722.80	-0.39	52.49	52.10	117.18	-65.08	Peak	100	307	P
5	5776.00	-0.40	114.04	113.64	200.00	-86.36	Peak	100	307	P
6	5854.80	-0.24	58.81	58.57	111.26	-60.69	Peak	100	307	P
7	5862.40	-0.22	49.37	49.15	108.73	-59.58	Peak	100	307	P
8	5914.00	-0.04	58.42	58.38	76.34	-25.96	Peak	100	307	P
9	5948.00	0.02	49.32	49.34	68.20	-18.86	Peak	100	307	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH149 NSS1 MCS0
Pol : Horizontal Detector : Peak

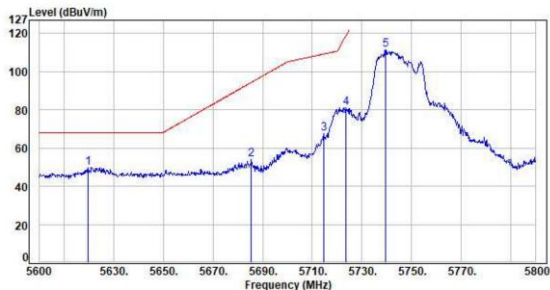

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5619.60	-0.57	50.28	49.71	68.20	-18.49	Peak	100	48	P
2	5685.40	-0.43	54.54	54.11	94.40	-40.29	Peak	100	48	P
3	5714.60	-0.37	67.76	67.39	109.29	-41.90	Peak	100	48	P
4	5723.40	-0.39	81.67	81.28	118.55	-37.27	Peak	100	48	P
5	5739.40	-0.42	111.87	111.45	200.00	-88.55	Peak	100	48	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH157 NSS1 MCS0
Pol : Horizontal Detector : Peak

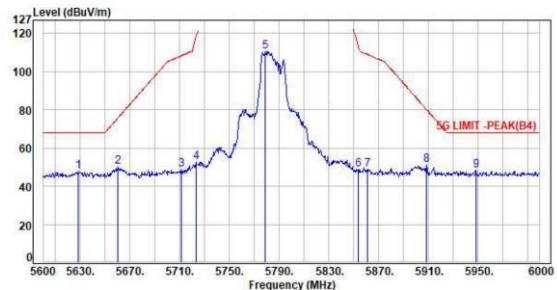


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5628.00	-0.58	48.27	47.69	68.20	-20.51	Peak	100	44	P
2	5668.40	-0.57	50.81	50.24	75.90	-25.66	Peak	100	44	P
3	5711.60	-0.36	49.33	48.97	108.45	-59.48	Peak	100	44	P
4	5723.20	-0.39	52.99	52.60	118.10	-65.50	Peak	100	44	P
5	5779.20	-0.39	111.00	110.61	200.00	-89.39	Peak	100	44	P
6	5853.60	-0.25	48.99	48.74	113.99	-65.25	Peak	100	44	P
7	5861.20	-0.23	49.22	48.99	109.06	-60.07	Peak	100	44	P
8	5908.00	-0.06	51.36	51.30	80.19	-28.89	Peak	100	44	P
9	5948.40	0.02	48.24	48.26	68.20	-19.94	Peak	100	44	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH165 NSS1 MCS0
Pol : Vertical Detector : Peak

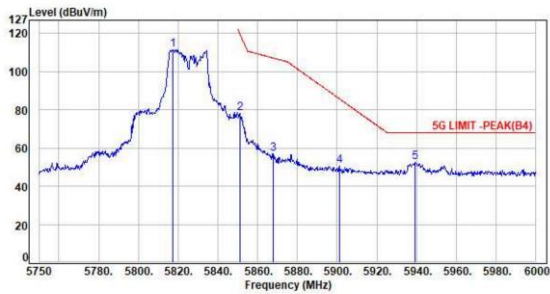

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5817.50	-0.32	112.06	111.74	200.00	-88.26	Peak	104	309	P
2	5851.00	-0.26	78.71	78.45	119.92	-41.47	Peak	104	309	P
3	5867.75	-0.19	57.31	57.12	107.23	-50.11	Peak	104	309	P
4	5901.00	-0.07	50.70	50.63	85.96	-35.33	Peak	104	309	P
5	5939.00	0.00	52.74	52.74	68.20	-15.46	Peak	104	309	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Peak

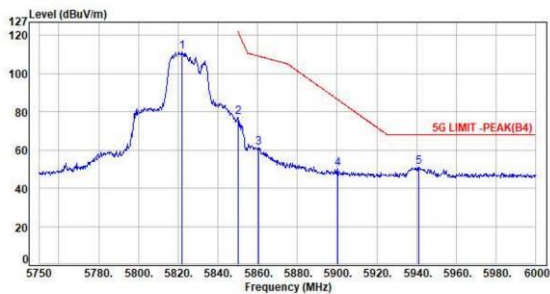


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5822.00	-0.32	111.65	111.33	200.00	-88.67	Peak	100	46	P
2	5850.25	-0.26	77.56	77.30	121.63	-44.33	Peak	100	46	P
3	5860.25	-0.23	61.33	61.10	109.33	-48.23	Peak	100	46	P
4	5900.25	-0.07	50.47	50.40	86.51	-36.11	Peak	100	46	P
5	5941.25	0.00	50.96	50.96	68.20	-17.24	Peak	100	46	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH151 NSS1 MCS0
Pol : Vertical Detector : Peak

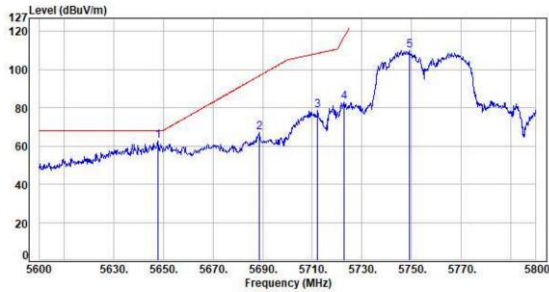

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5648.00	-0.63	63.36	62.73	68.20	-5.47	Peak	100	307	P
2	5688.60	-0.48	67.30	66.90	96.76	-29.86	Peak	100	307	P
3	5712.20	-0.36	78.85	78.49	108.62	-30.13	Peak	100	307	P
4	5722.80	-0.39	83.53	83.14	117.18	-34.04	Peak	100	307	P
5	5749.00	-0.45	110.67	110.22	200.00	-89.78	Peak	100	307	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH159 NSS1 MCS0
Pol : Vertical Detector : Peak

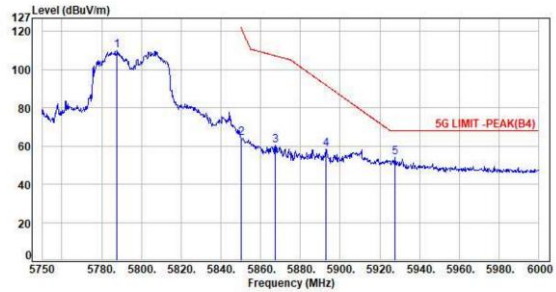

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5787.75	-0.37	110.27	109.90	200.00	-90.10	Peak	102	306	P
2	5850.25	-0.26	64.47	64.21	121.63	-57.42	Peak	102	306	P
3	5867.50	-0.19	60.38	60.19	107.30	-47.11	Peak	102	306	P
4	5892.75	-0.10	58.60	58.50	92.06	-33.56	Peak	102	306	P
5	5927.75	-0.01	54.04	54.03	68.20	-14.17	Peak	102	306	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH151 NSS1 MCS0
Pol : Horizontal Detector : Peak

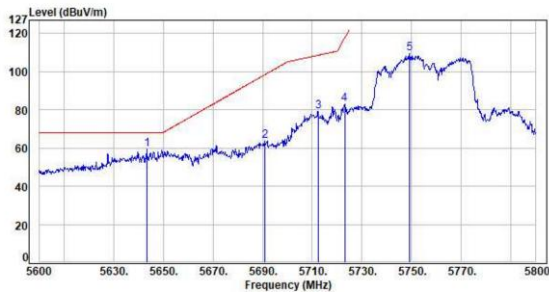

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5643.40	-0.61	59.94	59.33	68.20	-8.87	Peak	100	44	P
2	5691.00	-0.38	64.05	63.67	98.54	-34.87	Peak	100	44	P
3	5712.40	-0.36	79.64	79.28	108.67	-29.39	Peak	100	44	P
4	5723.00	-0.39	83.38	82.99	117.64	-34.65	Peak	100	44	P
5	5749.20	-0.45	110.14	109.69	200.00	-90.31	Peak	100	44	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH159 NSS1 MCS0
Pol : Horizontal Detector : Peak

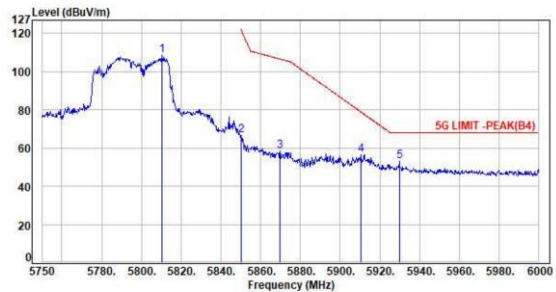

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5810.50	-0.34	108.77	108.43	200.00	-91.57	Peak	100	45	P
2	5850.25	-0.26	67.12	66.86	121.63	-54.77	Peak	100	45	P
3	5869.75	-0.19	58.67	58.48	106.67	-48.19	Peak	100	45	P
4	5910.25	-0.06	56.41	56.35	79.11	-22.76	Peak	100	45	P
5	5929.75	-0.01	53.02	53.01	68.20	-15.19	Peak	100	45	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be80 CH155 NSS1 MCS0

Pol : Vertical

Detector : Peak

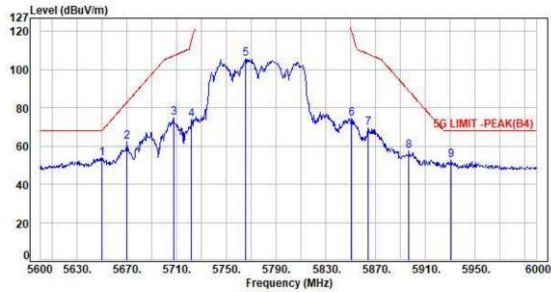

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5649.60	-0.63	54.35	53.72	68.20	-14.48	Peak	100	310	P
2	5670.00	-0.51	62.95	62.44	83.00	-20.56	Peak	100	310	P
3	5707.60	-0.36	75.43	75.07	107.33	-32.26	Peak	100	310	P
4	5722.00	-0.38	74.37	73.99	115.36	-41.37	Peak	100	310	P
5	5765.60	-0.42	106.03	105.61	200.00	-94.39	Peak	100	310	P
6	5850.00	-0.26	74.86	74.60	120.38	-45.78	Peak	100	310	P
7	5864.00	-0.20	69.88	69.68	108.28	-38.60	Peak	100	310	P
8	5896.80	-0.08	57.63	57.55	89.07	-31.52	Peak	100	310	P
9	5931.20	-0.01	52.48	52.47	68.20	-15.73	Peak	100	310	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH155 NSS1 MCS0

Pol : Horizontal

Detector : Peak

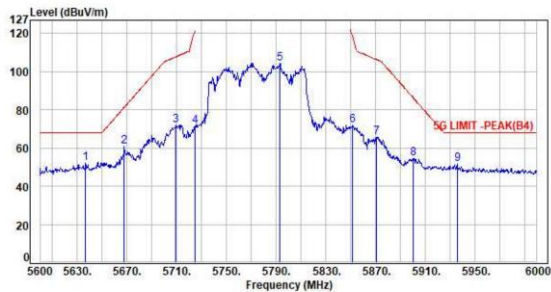

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5636.80	-0.60	52.52	51.92	68.20	-16.28	Peak	100	46	P
2	5668.00	-0.52	61.24	60.72	81.52	-20.80	Peak	100	46	P
3	5709.20	-0.36	72.52	72.16	107.78	-35.62	Peak	100	46	P
4	5724.40	-0.39	71.95	71.56	120.83	-49.27	Peak	100	46	P
5	5793.20	-0.36	104.80	104.44	200.00	-95.56	Peak	100	46	P
6	5851.60	-0.25	72.36	72.11	118.55	-46.44	Peak	100	46	P
7	5870.80	-0.19	66.05	65.86	106.38	-40.52	Peak	100	46	P
8	5900.80	-0.07	54.73	54.66	86.11	-31.45	Peak	100	46	P
9	5936.00	-0.01	51.49	51.48	68.20	-16.72	Peak	100	46	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps

Pol : Vertical

Detector : Peak

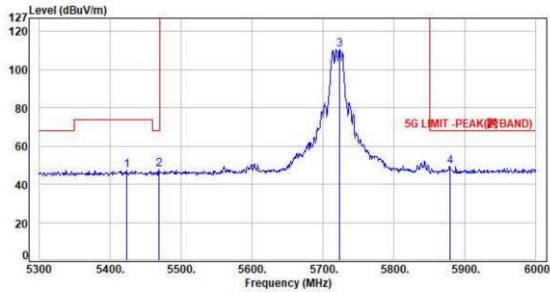

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5423.20	-0.96	48.07	47.11	74.00	-26.89	Peak	104	309	P
2	5469.40	-0.68	48.29	47.61	68.20	-20.59	Peak	104	309	P
3	5723.50	-0.39	111.18	110.79	200.00	-89.21	Peak	104	309	P
4	5878.90	-0.15	49.44	49.29	68.20	-18.91	Peak	104	309	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH144 NS5S1 MCS0

Pol : Vertical

Detector : Peak

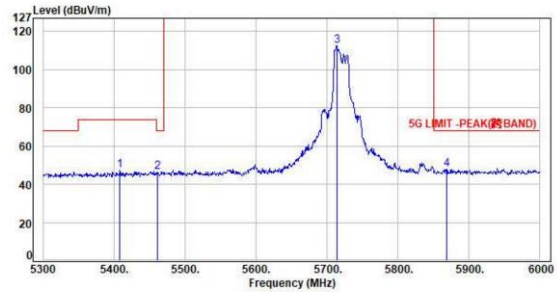

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5408.50	-1.05	48.49	47.44	74.00	-26.56	Peak	100	313	P
2	5461.70	-0.73	47.31	46.58	68.20	-21.62	Peak	100	313	P
3	5713.70	-0.37	113.04	112.67	200.00	-87.33	Peak	100	313	P
4	5868.40	-0.19	47.97	47.78	68.20	-20.42	Peak	100	313	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH144 6Mbps

Pol : Horizontal

Detector : Peak

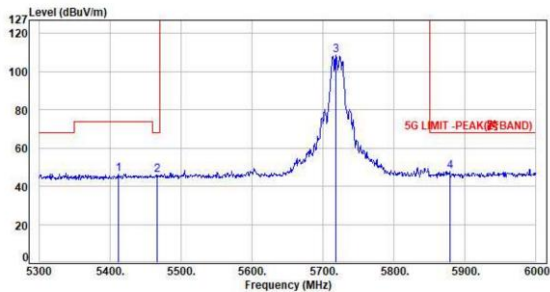

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5411.30	-1.02	47.49	46.47	74.00	-27.53	Peak	100	32	P
2	5466.60	-0.69	46.49	45.80	68.20	-22.40	Peak	100	32	P
3	5718.60	-0.37	108.83	108.46	200.00	-91.54	Peak	100	32	P
4	5878.90	-0.15	47.80	47.65	68.20	-20.55	Peak	100	32	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH144 NS5S1 MCS0

Pol : Horizontal

Detector : Peak

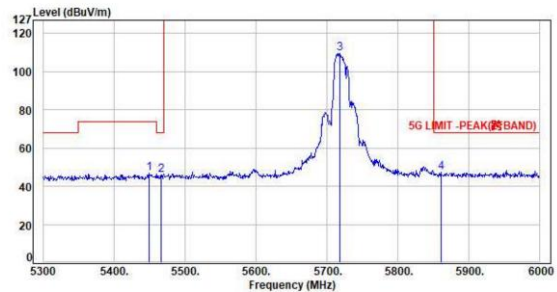

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5449.80	-0.80	47.41	46.61	74.00	-27.39	Peak	100	51	P
2	5466.60	-0.69	46.67	45.98	68.20	-22.22	Peak	100	51	P
3	5717.90	-0.37	110.03	109.66	200.00	-90.34	Peak	100	51	P
4	5868.70	-0.23	47.46	47.23	68.20	-20.97	Peak	100	51	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be40 CH142 NSS1 MCS0

Pol : Vertical

Detector : Peak

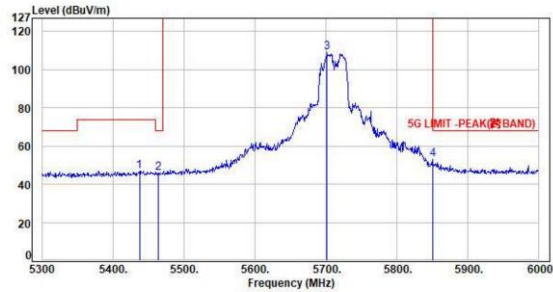

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5437.20	-0.88	47.91	47.03	74.00	-26.97	Peak	100	312	P
2	5463.80	-0.72	46.49	45.77	68.20	-22.43	Peak	100	312	P
3	5701.80	-0.33	109.33	109.00	200.00	-91.00	Peak	100	312	P
4	5850.20	-0.26	53.19	52.93	68.20	-15.27	Peak	100	312	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH142 NSS1 MCS0

Pol : Horizontal

Detector : Peak

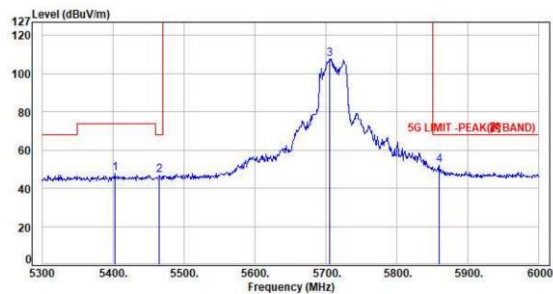

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5402.20	-1.08	48.97	47.89	74.00	-26.11	Peak	100	44	P
2	5465.20	-0.71	47.45	46.74	68.20	-21.46	Peak	100	44	P
3	5704.60	-0.34	108.04	107.70	200.00	-92.30	Peak	100	44	P
4	5859.30	-0.23	52.28	52.05	68.20	-16.15	Peak	100	44	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH138 NSS1 MCS0
Pol : Vertical Detector : Peak

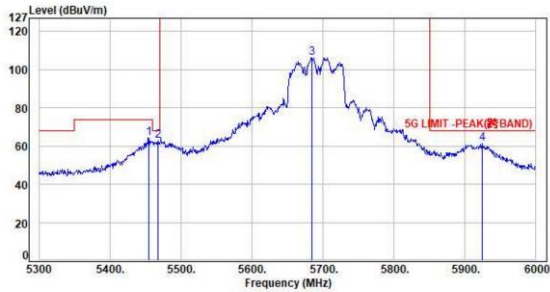

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5454.70	-0.76	64.86	64.10	74.00	-9.90	Peak	100	313	P
2	5467.30	-0.69	63.49	62.80	68.20	-5.40	Peak	100	313	P
3	5685.00	-0.43	106.70	106.27	200.00	-93.73	Peak	100	313	P
4	5925.10	-0.03	61.17	61.14	68.20	-7.06	Peak	100	313	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH138 NSS1 MCS0
Pol : Vertical Detector : Average

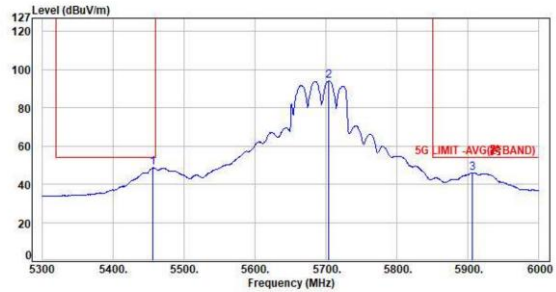

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5456.10	-0.75	49.31	48.56	54.00	-5.44	Average	100	313	P
2	5703.90	-0.34	94.48	94.14	200.00	-105.86	Average	100	313	P
3	5906.20	-0.06	46.13	46.07	54.00	-7.93	Average	100	313	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH138 NSS1 MCS0
Pol : Horizontal Detector : Peak

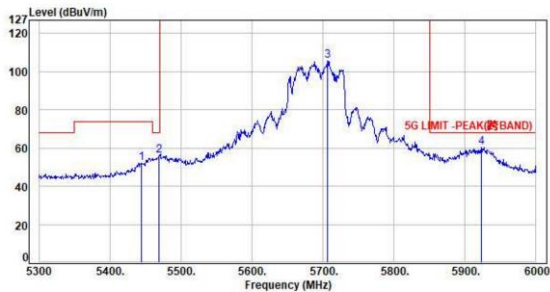

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5444.90	-0.83	53.05	52.22	74.00	-21.78	Peak	100	48	P
2	5469.40	-0.68	56.81	56.13	68.20	-12.07	Peak	100	48	P
3	5706.70	-0.35	106.24	105.89	200.00	-94.11	Peak	100	48	P
4	5923.00	-0.03	60.49	60.46	68.20	-7.74	Peak	100	48	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH138 NSS1 MCS0
Pol : Horizontal Detector : Average

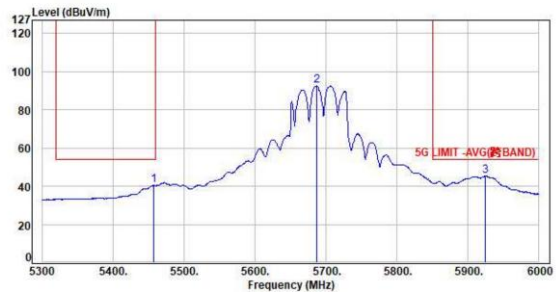


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5456.00	-0.76	41.20	40.44	54.00	-13.56	Average	100	48	P
2	5686.40	-0.41	92.92	92.51	200.00	-107.49	Average	100	48	P
3	5924.40	-0.03	45.42	45.39	54.00	-8.61	Average	100	48	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH50 NSS1 MCS0
Pol : Vertical Detector : Peak

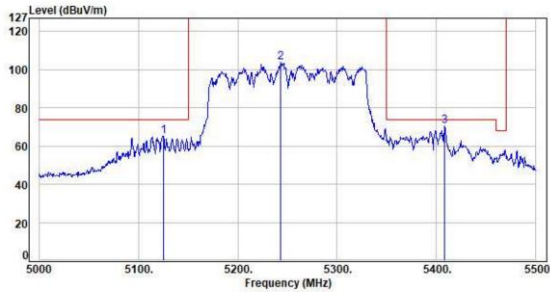

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5125.00	-0.32	65.62	65.30	74.00	-8.70	Peak	119	360	P
2	5244.50	-0.93	104.53	103.60	200.00	-96.40	Peak	119	360	P
3	5408.00	-1.05	71.54	70.49	74.00	-3.51	Peak	119	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH50 NSS1 MCS0
Pol : Vertical Detector : Average

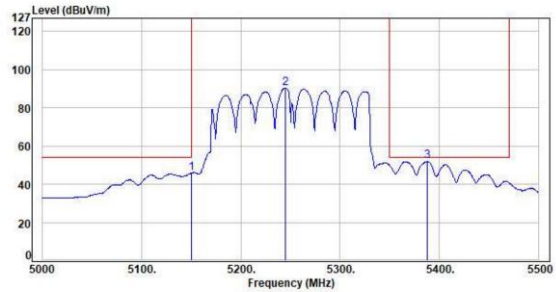

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5125.00	-0.27	46.22	45.95	54.00	-8.05	Average	119	360	P
2	5244.50	-0.95	91.29	90.34	200.00	-109.66	Average	119	360	P
3	5388.00	-1.09	53.03	51.94	54.00	-2.06	Average	119	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH50 NSS1 MCS0
Pol : Horizontal Detector : Peak

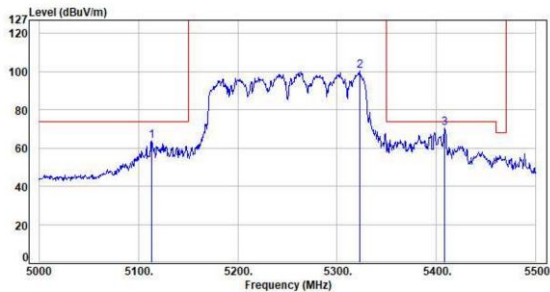

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5113.00	-0.34	64.21	63.87	74.00	-10.13	Peak	126	344	P
2	5322.50	-1.15	101.64	100.49	200.00	-99.51	Peak	126	344	P
3	5408.50	-1.05	71.33	70.28	74.00	-3.72	Peak	126	344	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH50 NSS1 MCS0
Pol : Horizontal Detector : Average

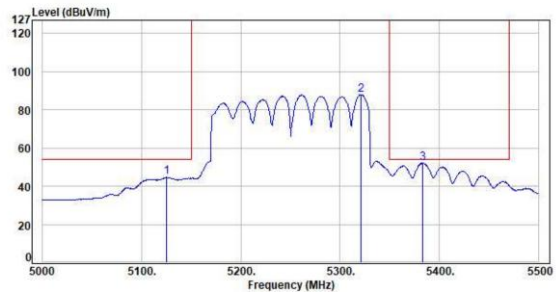

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5125.50	-0.32	45.05	44.73	54.00	-9.27	Average	126	344	P
2	5321.00	-1.15	89.22	88.07	200.00	-111.93	Average	126	344	P
3	5383.00	-1.09	53.19	52.10	54.00	-1.90	Average	126	344	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




6.7. Test Result and Data (1GHz ~ 7GHz)

Test Mode : 2TX 11a CH36 6Mbps

Pol : Vertical

Detector : Peak

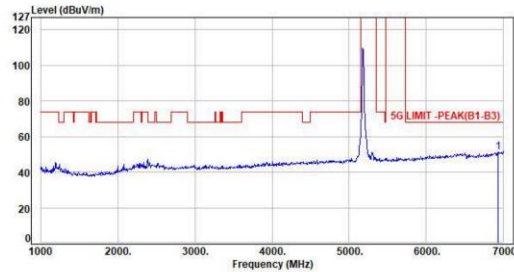

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6934.00	2.49	48.71	51.20	68.20	-17.00	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH40 6Mbps

Pol : Vertical

Detector : Peak

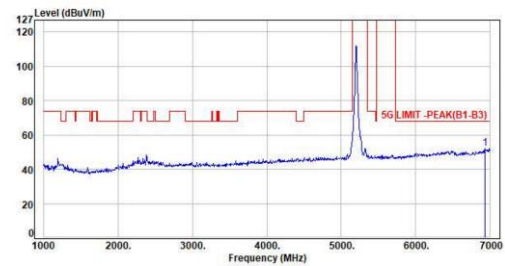

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	2.46	49.67	52.13	68.20	-16.07	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Peak

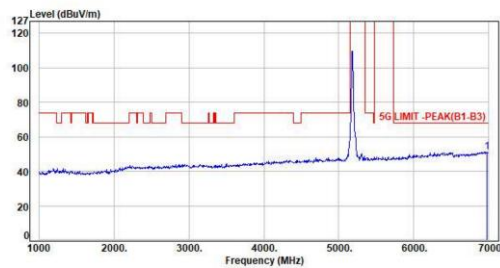

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	2.58	48.83	51.41	68.20	-16.79	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Peak

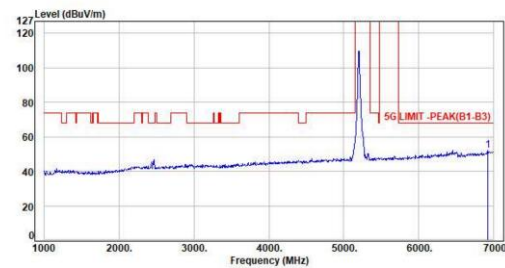

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6916.00	2.41	49.74	52.15	68.20	-16.05	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH48 6Mbps

Pol : Vertical

Detector : Peak

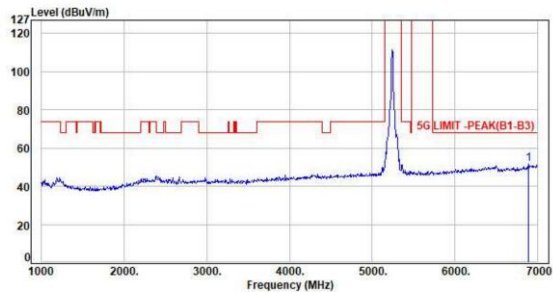


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6886.00	2.28	49.17	51.45	68.20	-16.75	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Peak

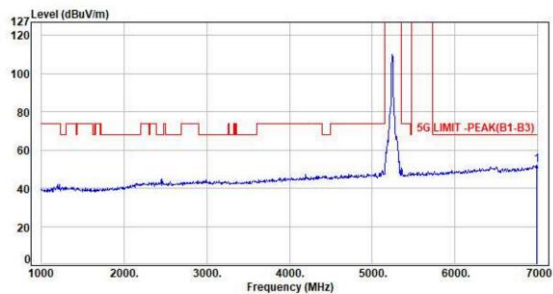


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	2.61	49.61	52.22	68.20	-15.98	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH36 NSS1 MCS0
Pol : Vertical Detector : Peak

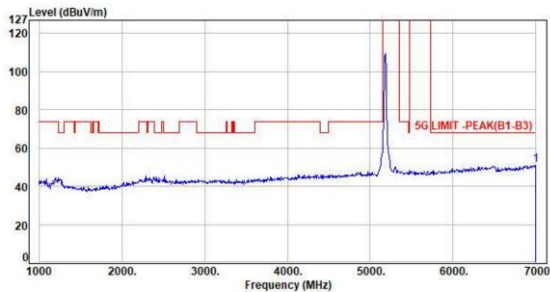

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	2.63	48.62	51.25	68.20	-16.95	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH40 NSS1 MCS0
Pol : Vertical Detector : Peak

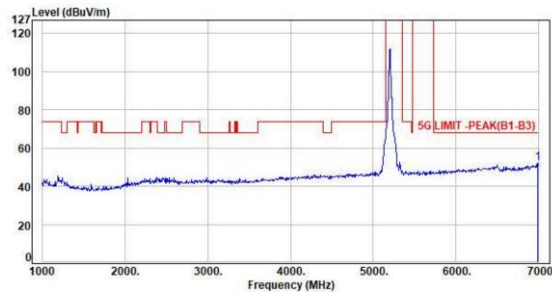

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	2.60	49.36	51.96	68.20	-16.24	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH36 NSS1 MCS0
Pol : Horizontal Detector : Peak

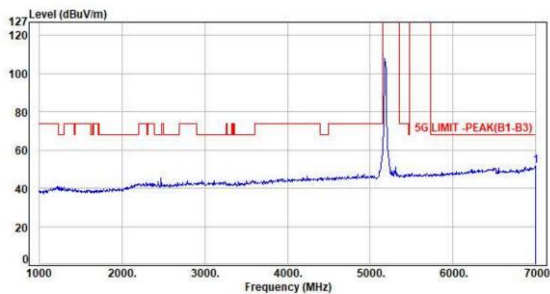

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	2.63	48.85	51.48	68.20	-16.72	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Peak

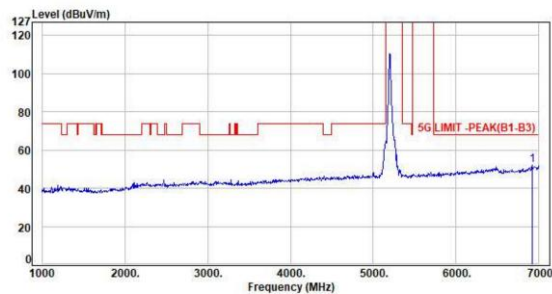


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6916.00	2.41	49.55	51.96	68.20	-16.24	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH48 NSS1 MCS0
Pol : Vertical Detector : Peak

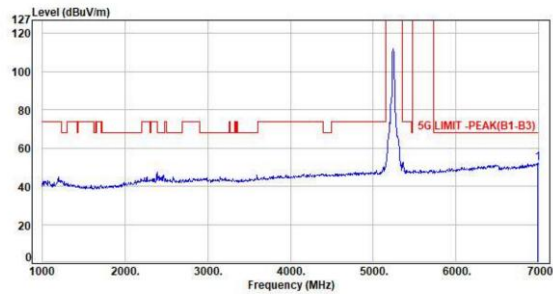

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	2.61	49.47	52.08	68.20	-16.12	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Peak

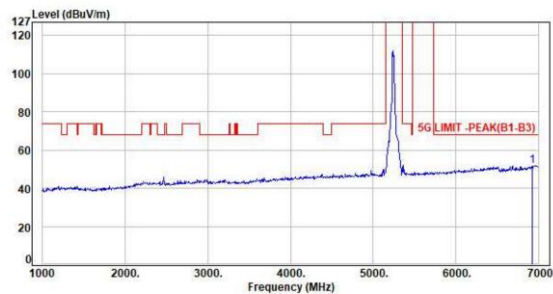


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6922.00	2.45	49.38	51.83	68.20	-16.37	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH38 NSS1 MCS0
Pol : Vertical Detector : Peak

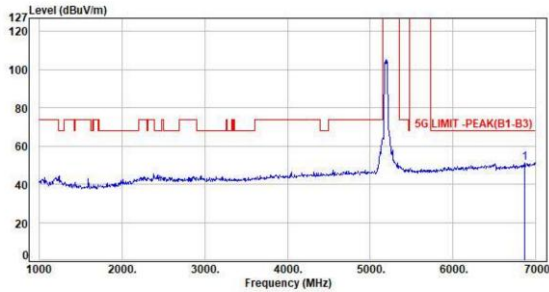

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6862.00	2.14	48.87	51.01	68.20	-17.19	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH46 NSS1 MCS0
Pol : Vertical Detector : Peak

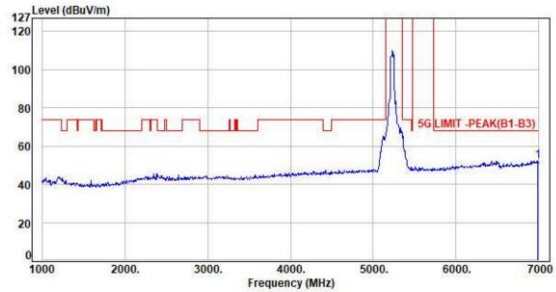

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	2.61	49.68	52.29	68.20	-15.91	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Peak

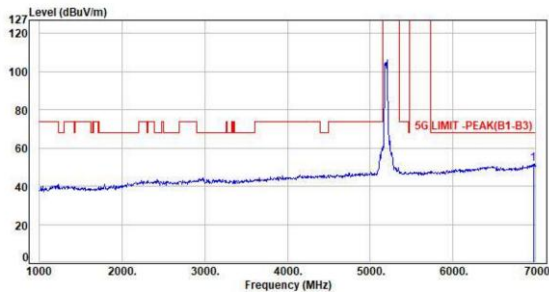

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6970.00	2.58	49.21	51.79	68.20	-16.41	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Peak

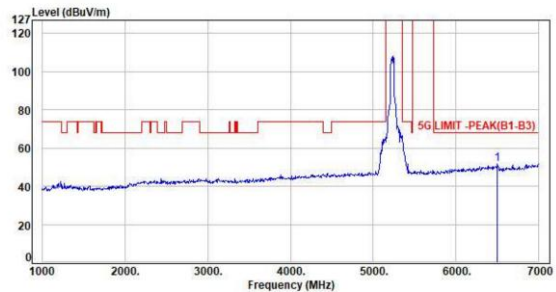


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6502.00	1.68	50.07	51.75	68.20	-16.45	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH42 NSS1 MCS0
Pol : Vertical Detector : Peak

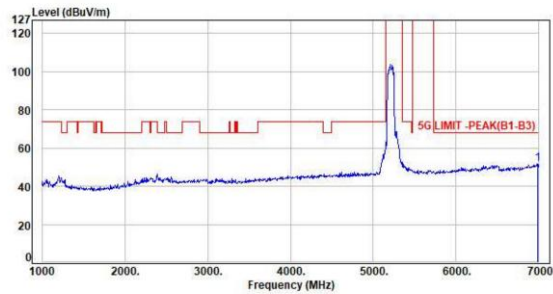

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	2.61	49.13	51.74	68.20	-16.46	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Peak

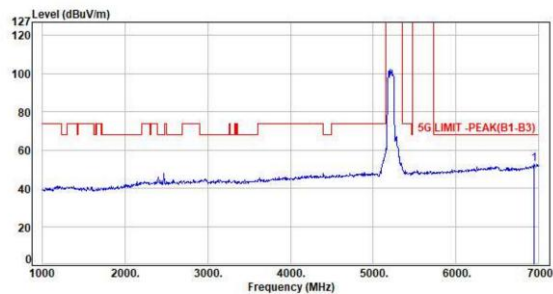


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	2.52	50.24	52.76	68.20	-15.44	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11a CH52 6Mbps
Pol : Vertical Detector : Peak

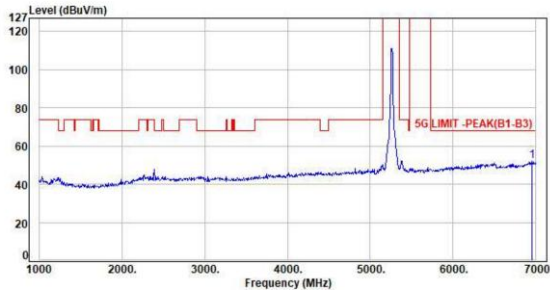

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	2.55	49.45	52.00	68.20	-16.20	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11a CH60 6Mbps
Pol : Vertical Detector : Peak

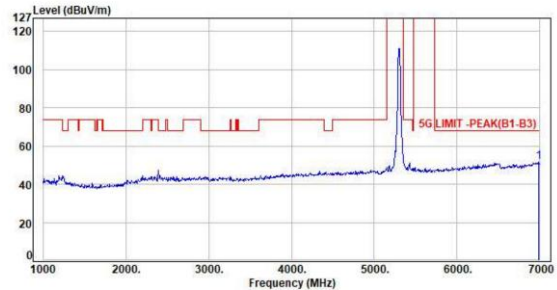

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	2.60	49.15	51.75	68.20	-16.45	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11a CH52 6Mbps
Pol : Horizontal Detector : Peak

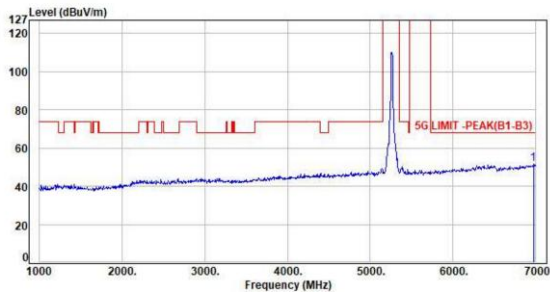

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6970.00	2.58	49.12	51.70	68.20	-16.50	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH60 6Mbps
Pol : Horizontal Detector : Peak

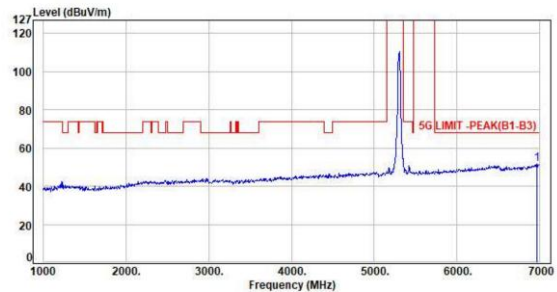


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6964.00	2.57	48.94	51.51	68.20	-16.69	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11a CH64 6Mbps
Pol : Vertical Detector : Peak

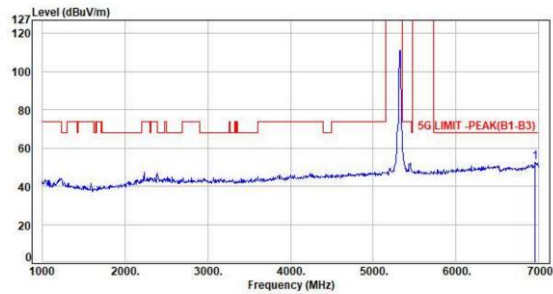

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	2.56	49.84	52.40	68.20	-15.80	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH64 6Mbps
Pol : Horizontal Detector : Peak

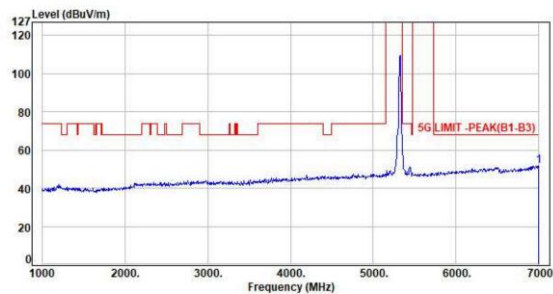


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	2.63	49.06	51.69	68.20	-16.51	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH52 NSS1 MCS0
Pol : Vertical Detector : Peak

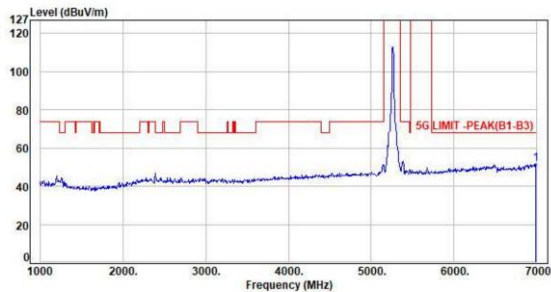

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	2.60	49.09	51.69	68.20	-16.51	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH60 NSS1 MCS0
Pol : Vertical Detector : Peak

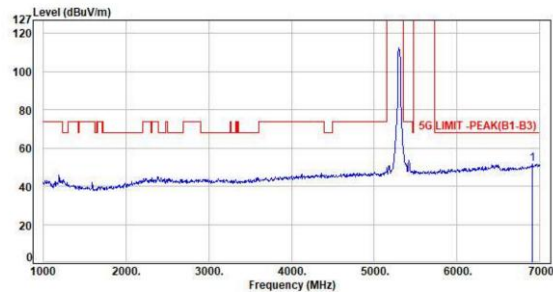

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6904.00	2.38	49.19	51.57	68.20	-16.63	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Peak

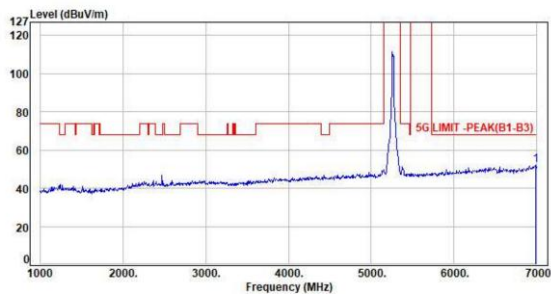

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	2.61	49.49	52.10	68.20	-16.10	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Peak

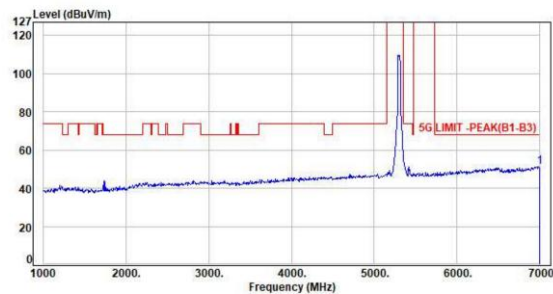


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	2.63	48.65	51.28	68.20	-16.92	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH64 NSS1 MCS0
Pol : Vertical Detector : Peak

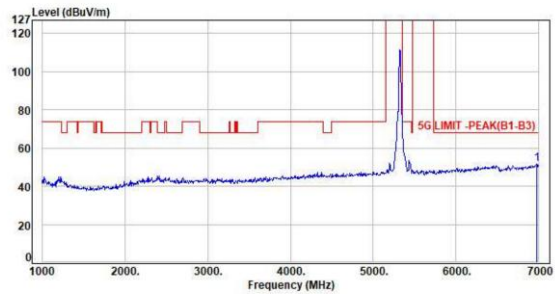

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	2.58	49.28	51.86	68.20	-16.34	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Peak

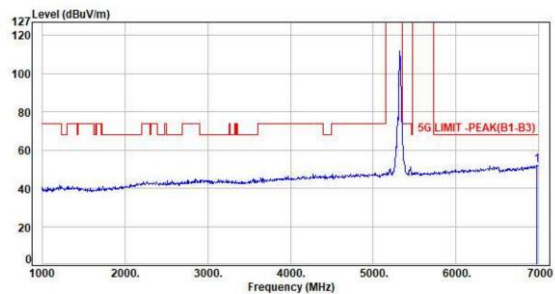


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	2.58	49.76	52.34	68.20	-15.86	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH54 NSS1 MCS0
Pol : Vertical Detector : Peak

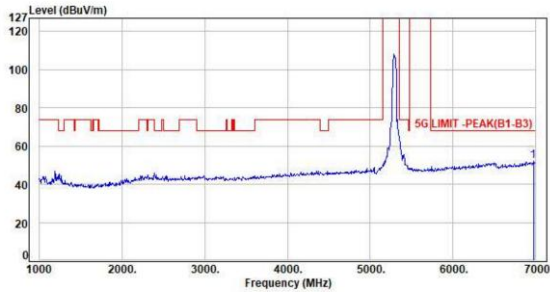

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6970.00	2.58	49.64	52.22	68.20	-15.98	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH62 NSS1 MCS0
Pol : Vertical Detector : Peak

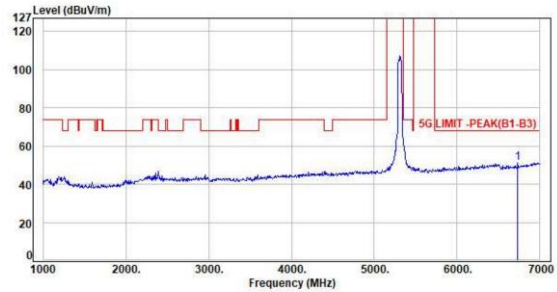

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6736.00	1.87	49.40	51.27	68.20	-16.93	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Peak

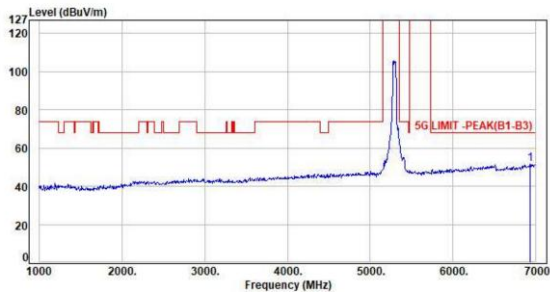

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6934.00	2.49	49.02	51.51	68.20	-16.69	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Peak

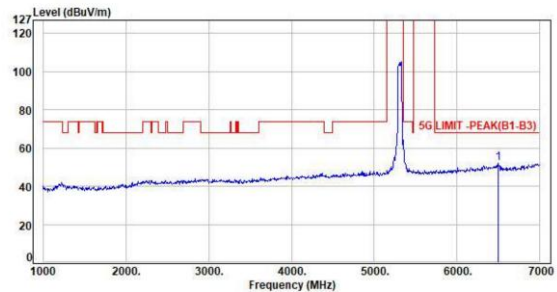


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6496.00	1.66	50.56	52.22	68.20	-15.98	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH58 NSS1 MCS0
Pol : Vertical Detector : Peak

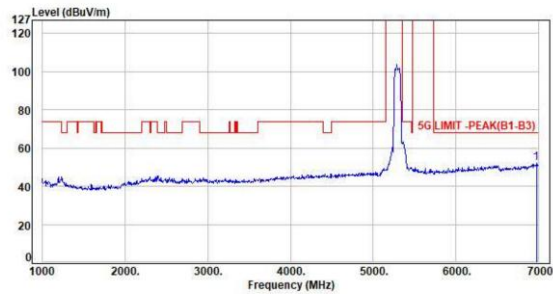

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6970.00	2.58	49.42	52.00	68.20	-16.20	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Peak

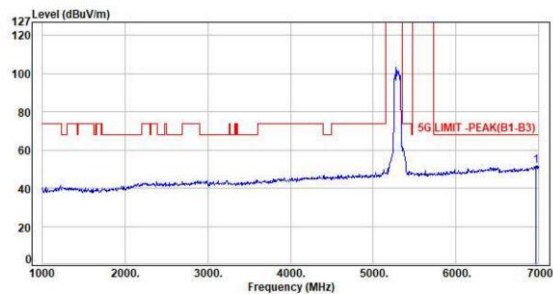

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6964.00	2.57	49.10	51.67	68.20	-16.53	Peak	100	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps

Pol : Vertical

Detector : Peak

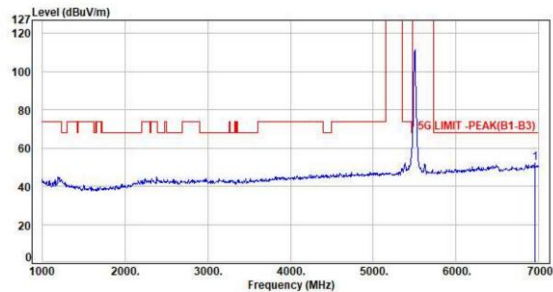


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	2.55	49.47	52.02	68.20	-16.18	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH120 6Mbps

Pol : Vertical

Detector : Peak

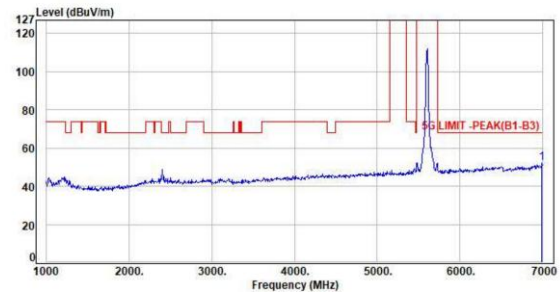


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	2.61	49.32	51.93	68.20	-16.27	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Peak

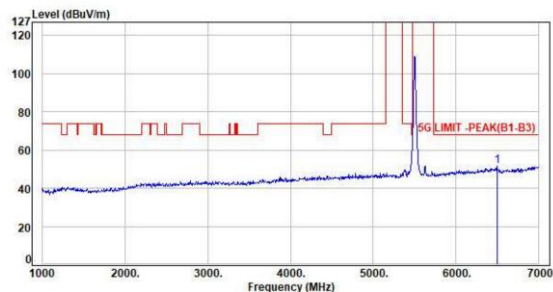


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6496.00	1.66	49.86	51.52	68.20	-16.68	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH120 6Mbps

Pol : Horizontal

Detector : Peak

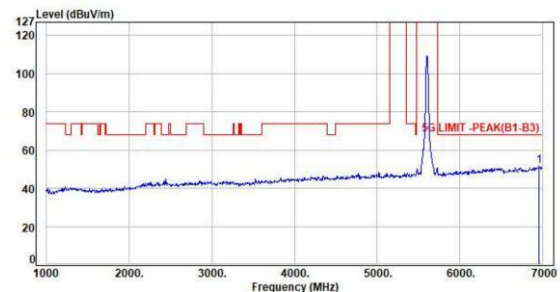

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	2.56	49.15	51.71	68.20	-16.49	Peak	100	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps

Pol : Vertical

Detector : Peak

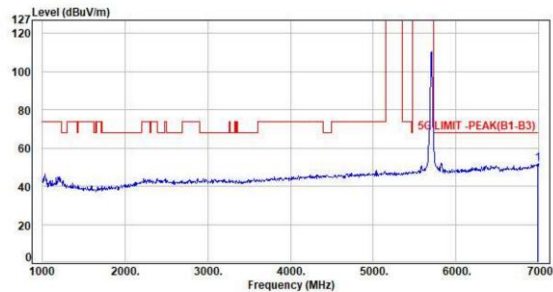

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5982.00	2.60	48.90	51.50	68.20	-16.70	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Peak

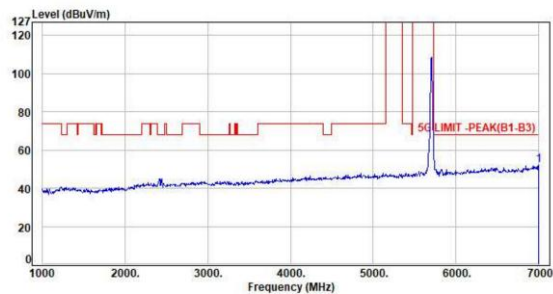

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5994.00	2.63	49.38	52.01	68.20	-16.19	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor