





Test Mode : 2TX 11be20 CH117 NSS1 MCS0
Pol : Vertical Detector : Peak

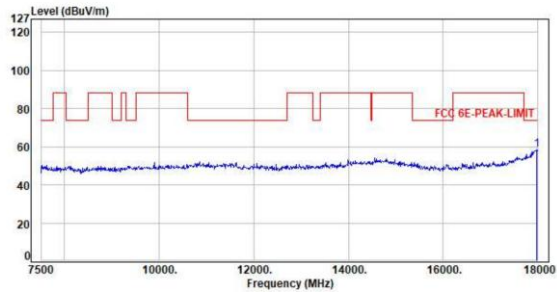

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.42	58.45	74.00	-15.55	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH117 NSS1 MCS0
Pol : Vertical Detector : Average

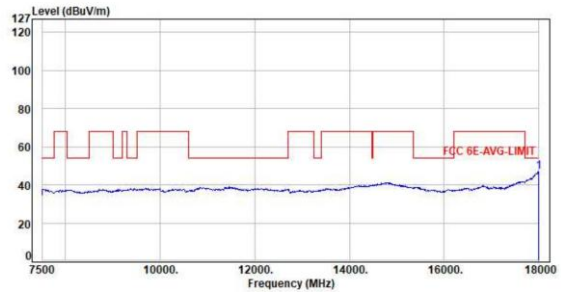

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.49	46.78	54.00	-7.22	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH117 NSS1 MCS0
Pol : Horizontal Detector : Peak

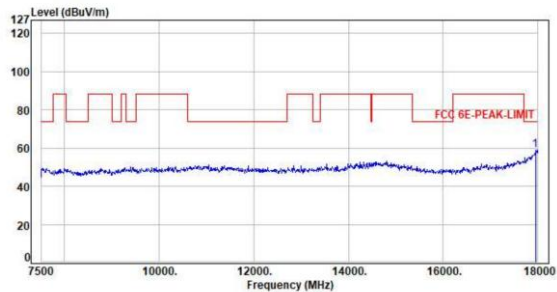

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17947.50	12.27	46.46	58.73	74.00	-15.27	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH117 NSS1 MCS0
Pol : Horizontal Detector : Average

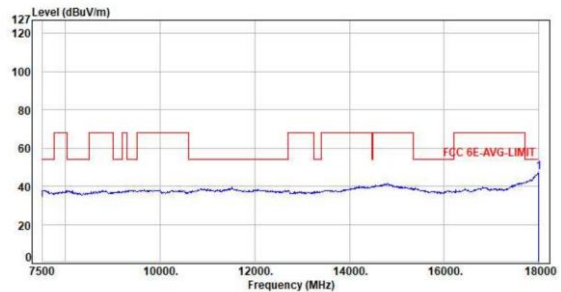


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.83	47.12	54.00	-6.88	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH153 NSS1 MCS0
Pol : Vertical Detector : Peak

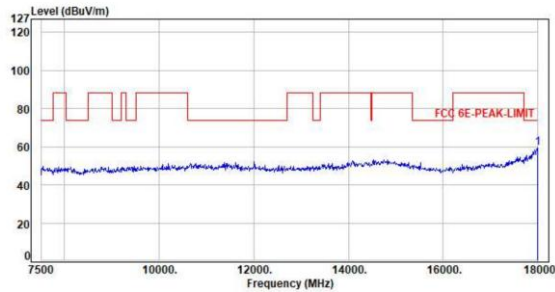

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	46.25	59.54	74.00	-14.46	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH153 NSS1 MCS0
Pol : Vertical Detector : Average

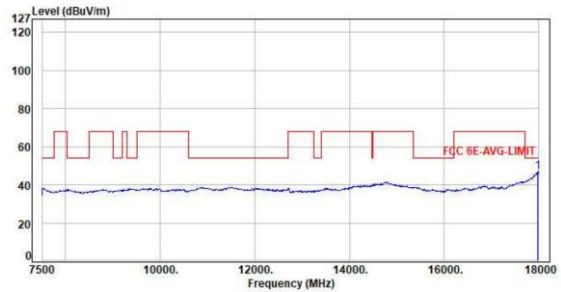

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.71	46.74	54.00	-7.26	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH153 NSS1 MCS0
Pol : Horizontal Detector : Peak

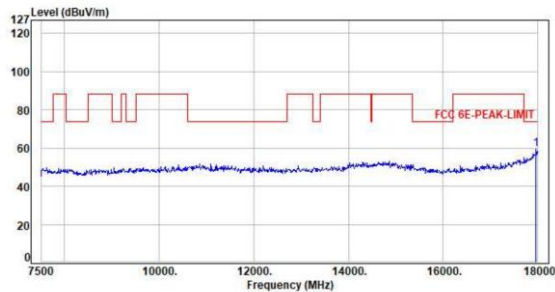

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17958.00	12.53	46.72	59.25	74.00	-14.75	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH153 NSS1 MCS0
Pol : Horizontal Detector : Average

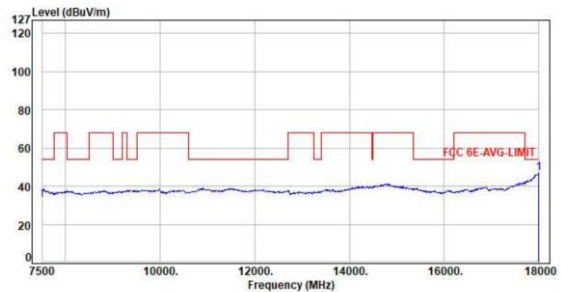


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.63	46.92	54.00	-7.08	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH181 NSS1 MCS0
Pol : Vertical Detector : Peak

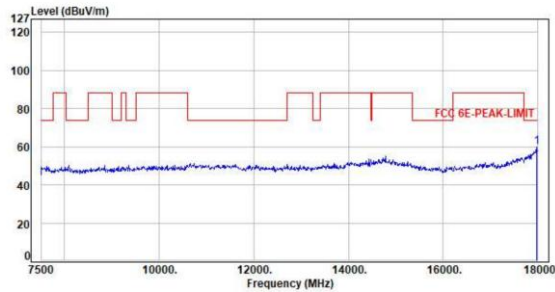

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17968.50	12.78	47.14	59.92	74.00	-14.08	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH181 NSS1 MCS0
Pol : Vertical Detector : Average

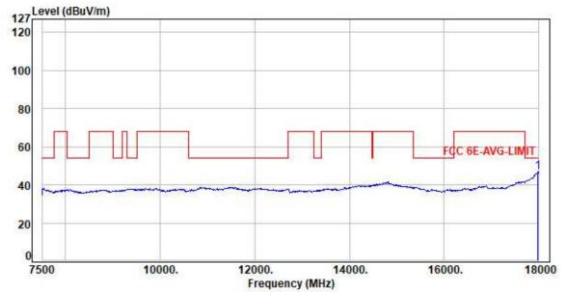

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.63	46.66	54.00	-7.34	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH181 NSS1 MCS0
Pol : Horizontal Detector : Peak

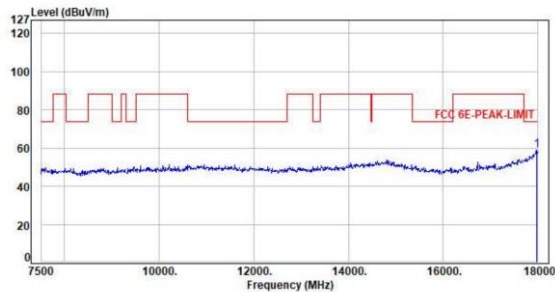

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.70	58.73	74.00	-15.27	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH181 NSS1 MCS0
Pol : Horizontal Detector : Average

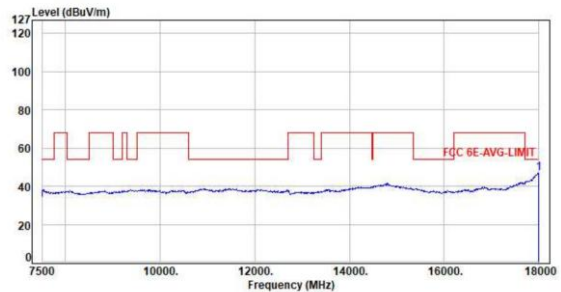


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.40	46.69	54.00	-7.31	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH123 NSS1 MCS0
Pol : Vertical Detector : Peak

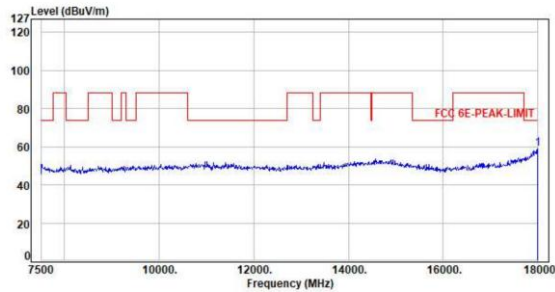

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	45.43	58.72	74.00	-15.28	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH123 NSS1 MCS0
Pol : Vertical Detector : Average

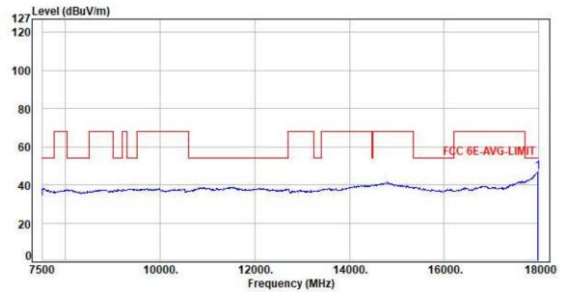

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.74	46.77	54.00	-7.23	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH123 NSS1 MCS0
Pol : Horizontal Detector : Peak

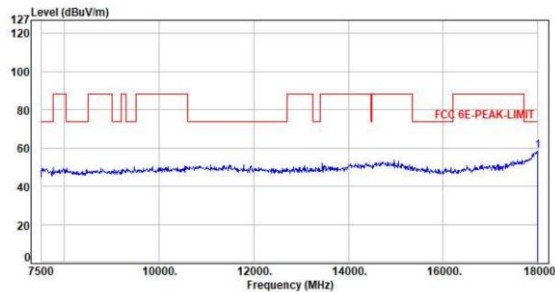

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	45.16	58.45	74.00	-15.55	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH123 NSS1 MCS0
Pol : Horizontal Detector : Average

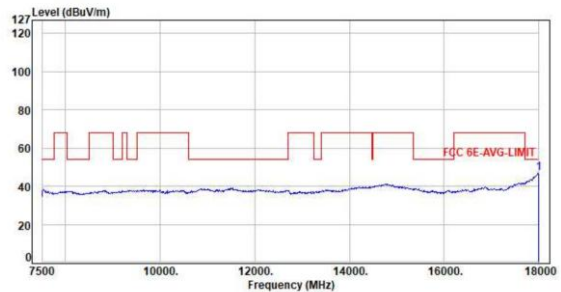


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.63	46.92	54.00	-7.08	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH155 NSS1 MCS0
Pol : Vertical Detector : Peak

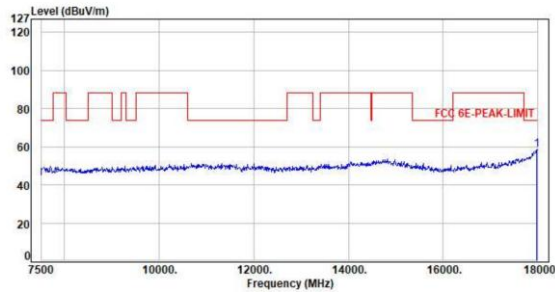

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.24	58.27	74.00	-15.73	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH155 NSS1 MCS0
Pol : Vertical Detector : Average

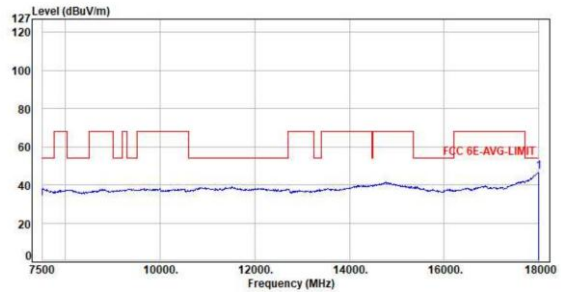

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.43	46.72	54.00	-7.28	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH155 NSS1 MCS0
Pol : Horizontal Detector : Peak

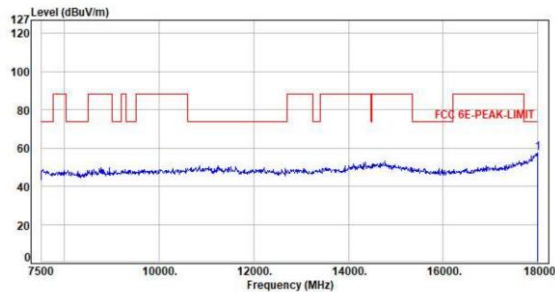

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	44.08	57.37	74.00	-16.63	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH155 NSS1 MCS0
Pol : Horizontal Detector : Average

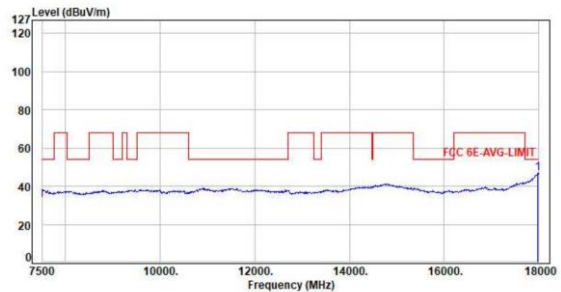


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.68	46.71	54.00	-7.29	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH179 NSS1 MCS0
Pol : Vertical Detector : Peak

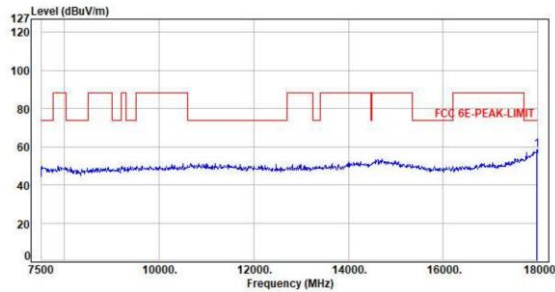

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.40	58.43	74.00	-15.57	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH179 NSS1 MCS0
Pol : Vertical Detector : Average

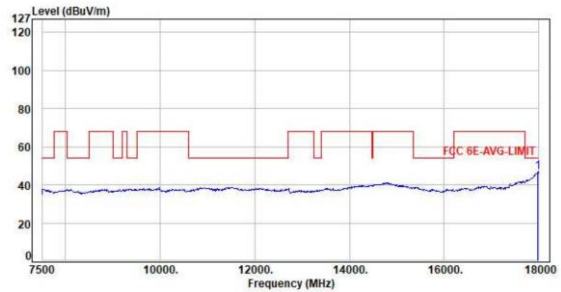

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.70	46.73	54.00	-7.27	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH179 NSS1 MCS0
Pol : Horizontal Detector : Peak

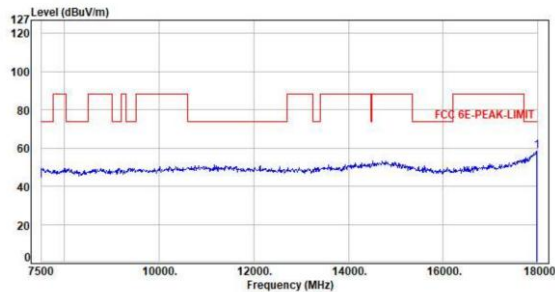

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.34	58.37	74.00	-15.63	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH179 NSS1 MCS0
Pol : Horizontal Detector : Average

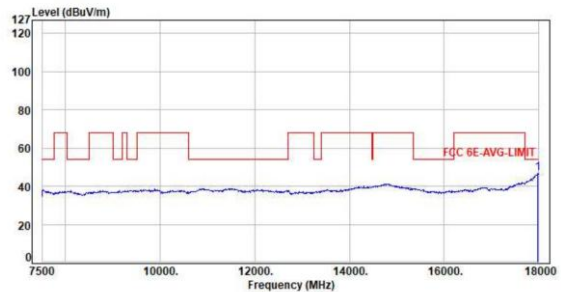


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.70	46.73	54.00	-7.27	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH135 NSS1 MCS0
Pol : Vertical Detector : Peak

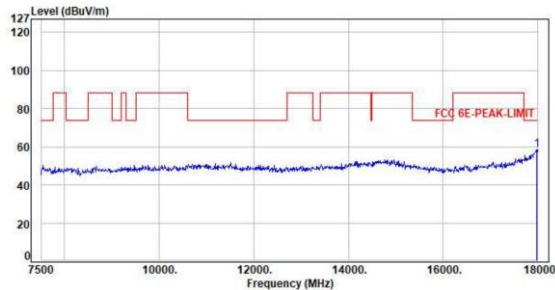

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17968.50	12.78	45.77	58.55	74.00	-15.45	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH135 NSS1 MCS0
Pol : Vertical Detector : Average

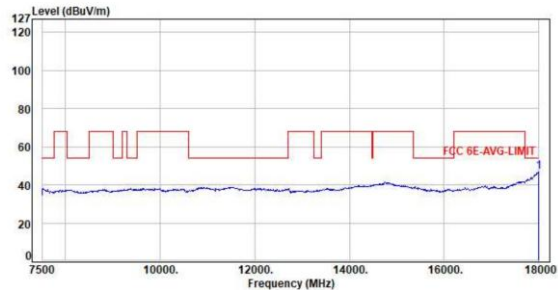

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.32	46.61	54.00	-7.39	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH135 NSS1 MCS0
Pol : Horizontal Detector : Peak

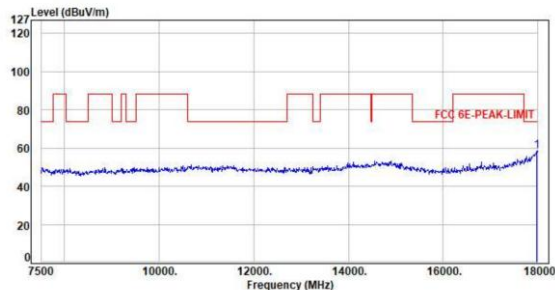

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17968.50	12.78	45.86	58.64	74.00	-15.36	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH135 NSS1 MCS0
Pol : Horizontal Detector : Average

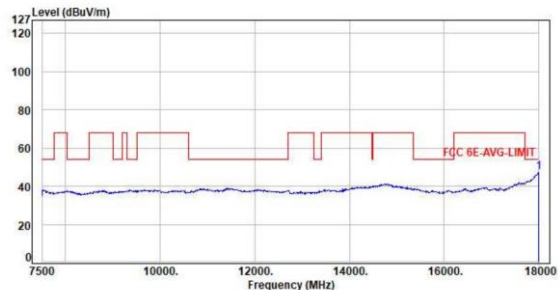


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.82	47.11	54.00	-6.89	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH151 NSS1 MCS0
Pol : Vertical Detector : Peak

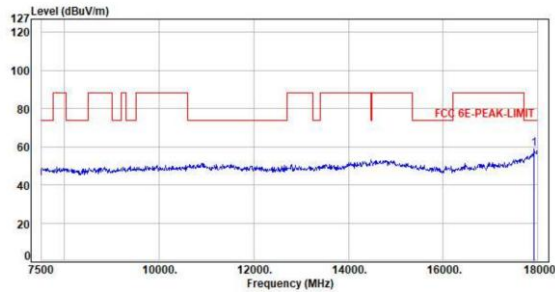

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17926.50	11.81	46.94	58.75	74.00	-15.25	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH151 NSS1 MCS0
Pol : Vertical Detector : Average

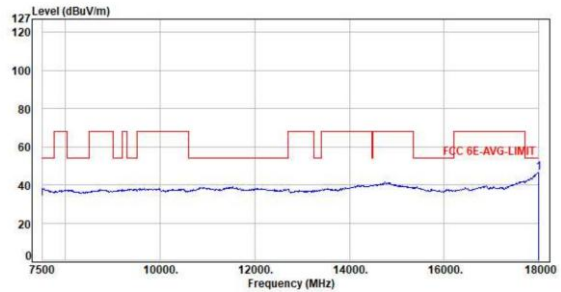

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.29	46.58	54.00	-7.42	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH151 NSS1 MCS0
Pol : Horizontal Detector : Peak

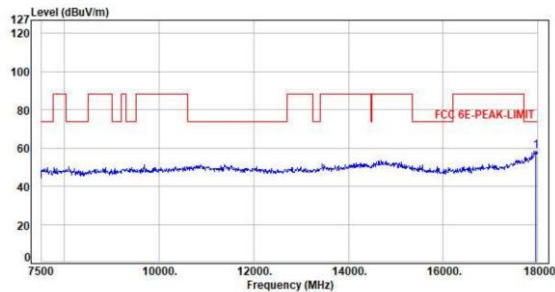

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17958.00	12.53	45.95	58.48	74.00	-15.52	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH151 NSS1 MCS0
Pol : Horizontal Detector : Average

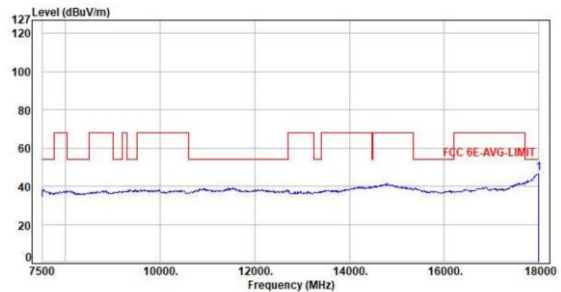


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.68	46.97	54.00	-7.03	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH167 NSS1 MCS0
Pol : Vertical Detector : Peak

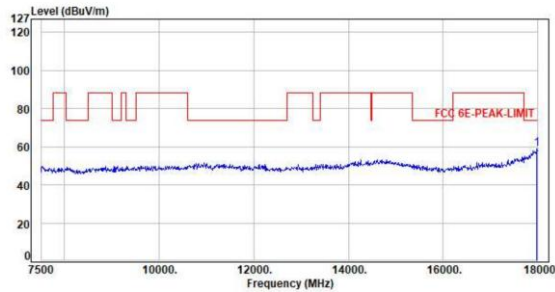

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.75	58.78	74.00	-15.22	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH167 NSS1 MCS0
Pol : Vertical Detector : Average

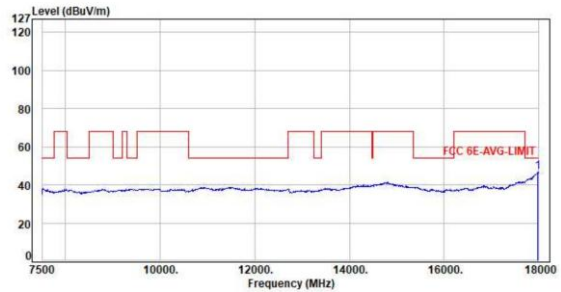

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.69	46.72	54.00	-7.28	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH167 NSS1 MCS0
Pol : Horizontal Detector : Peak

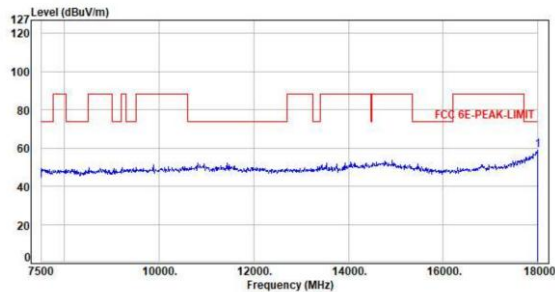

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	45.51	58.80	74.00	-15.20	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH167 NSS1 MCS0
Pol : Horizontal Detector : Average

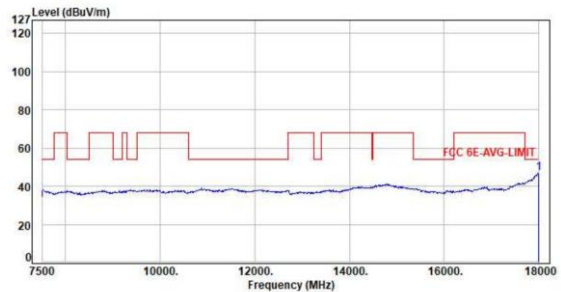


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.44	46.73	54.00	-7.27	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH143 NSS1 MCS0
Pol : Vertical Detector : Peak

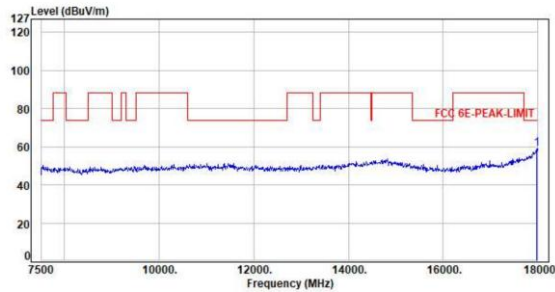

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.67	58.70	74.00	-15.30	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH143 NSS1 MCS0
Pol : Vertical Detector : Average

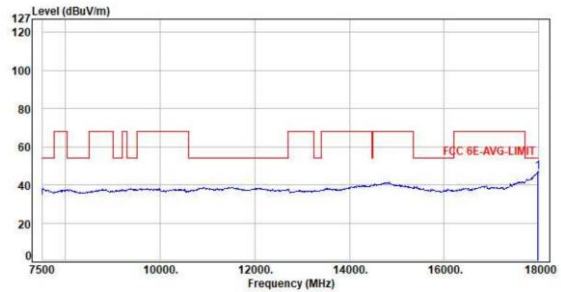

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.81	46.84	54.00	-7.16	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH143 NSS1 MCS0
Pol : Horizontal Detector : Peak

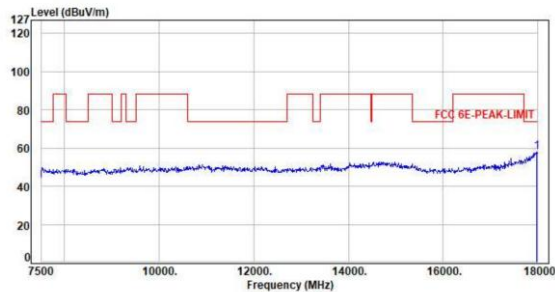

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	44.74	57.77	74.00	-16.23	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH143 NSS1 MCS0
Pol : Horizontal Detector : Average

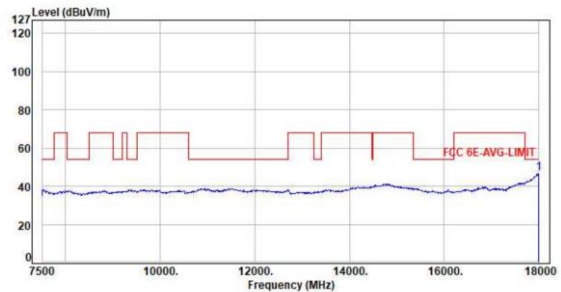


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.38	46.67	54.00	-7.33	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH189 NSS1 MCS0
Pol : Vertical Detector : Peak

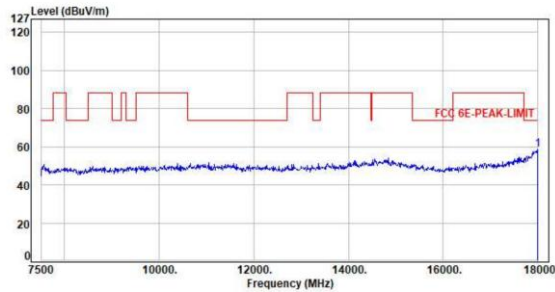

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	45.15	58.44	74.00	-15.56	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH189 NSS1 MCS0
Pol : Vertical Detector : Average

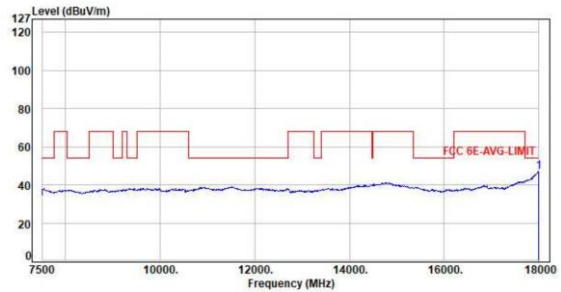

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.48	46.77	54.00	-7.23	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH189 NSS1 MCS0
Pol : Horizontal Detector : Peak

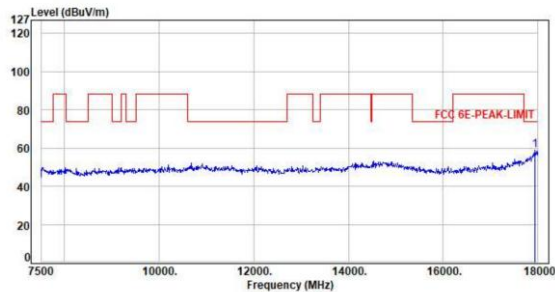

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17937.00	12.04	46.70	58.74	74.00	-15.26	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH189 NSS1 MCS0
Pol : Horizontal Detector : Average

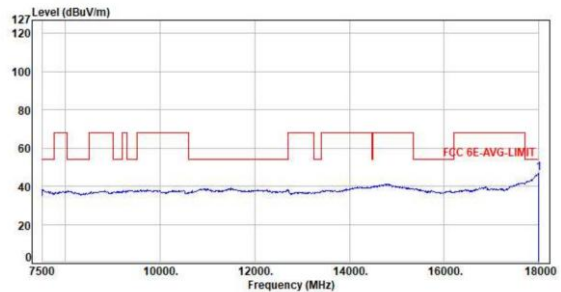


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.34	46.63	54.00	-7.37	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH213 NSS1 MCS0
Pol : Vertical Detector : Peak

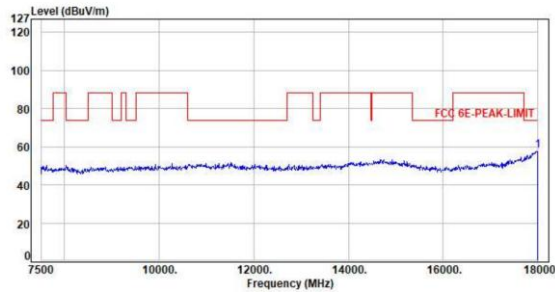

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	44.71	58.00	74.00	-16.00	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH213 NSS1 MCS0
Pol : Vertical Detector : Average

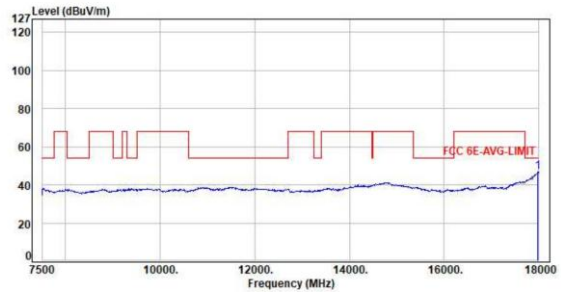

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.87	46.90	54.00	-7.10	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH213 NSS1 MCS0
Pol : Horizontal Detector : Peak

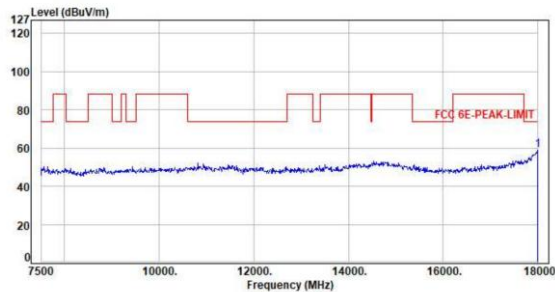

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	45.74	59.03	74.00	-14.97	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH213 NSS1 MCS0
Pol : Horizontal Detector : Average

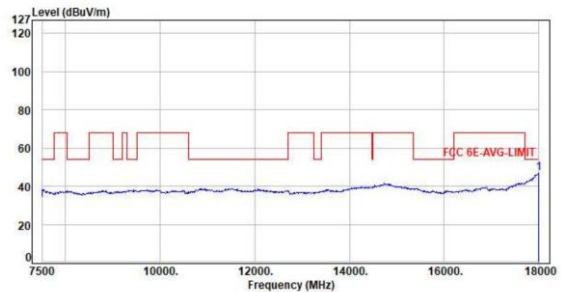


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.36	46.65	54.00	-7.35	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH229 NSS1 MCS0
Pol : Vertical Detector : Peak

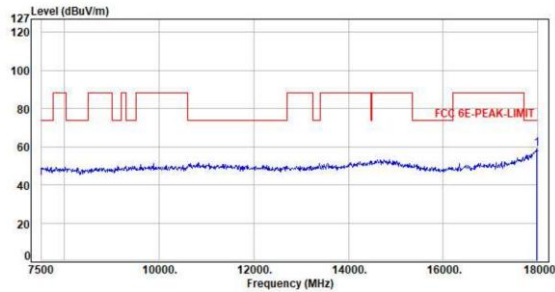

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.88	58.91	74.00	-15.09	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH229 NSS1 MCS0
Pol : Vertical Detector : Average

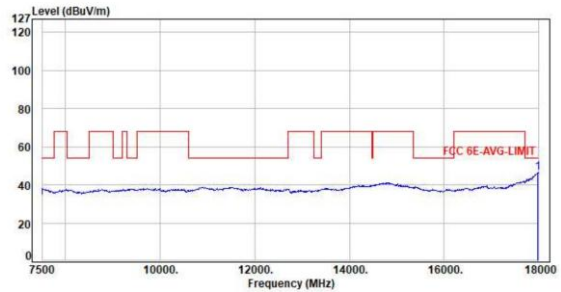

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.56	46.59	54.00	-7.41	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH229 NSS1 MCS0
Pol : Horizontal Detector : Peak

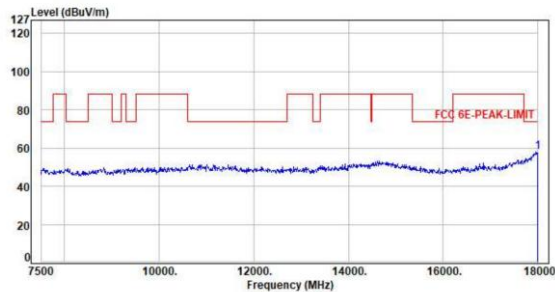

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	44.89	58.18	74.00	-15.82	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH229 NSS1 MCS0
Pol : Horizontal Detector : Average

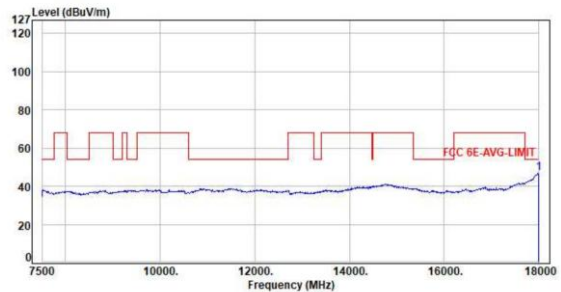


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.46	46.75	54.00	-7.25	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH233 NSS1 MCS0
Pol : Vertical Detector : Peak

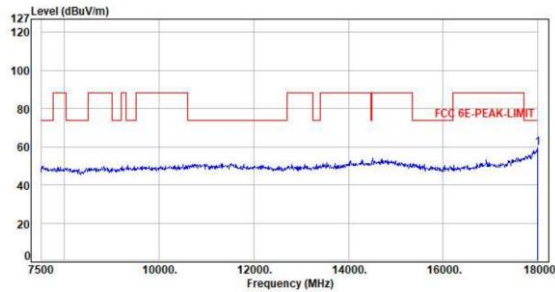

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	45.95	59.24	74.00	-14.76	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH233 NSS1 MCS0
Pol : Vertical Detector : Average

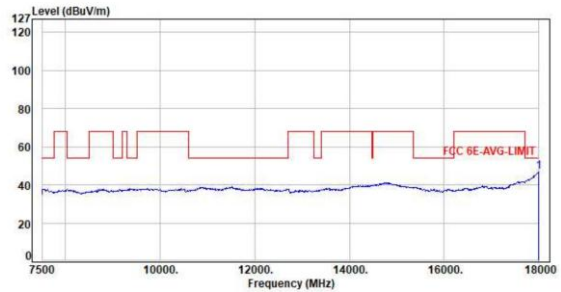

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.53	46.82	54.00	-7.18	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH233 NSS1 MCS0
Pol : Horizontal Detector : Peak

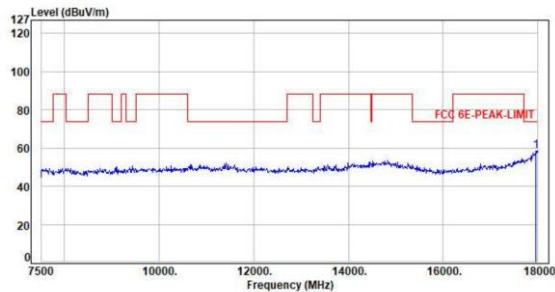

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17958.00	12.53	46.14	58.67	74.00	-15.33	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH233 NSS1 MCS0
Pol : Horizontal Detector : Average

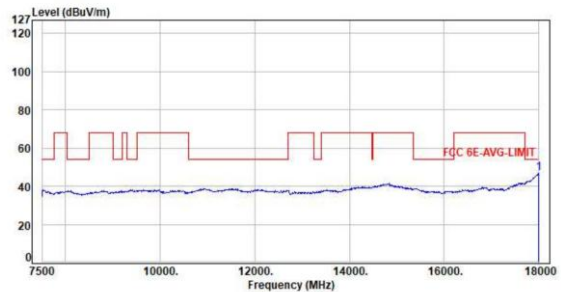


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.56	46.85	54.00	-7.15	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH195 NSS1 MCS0
Pol : Vertical Detector : Peak

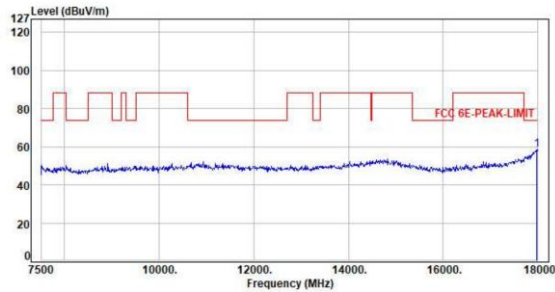

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.61	58.64	74.00	-15.36	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH195 NSS1 MCS0
Pol : Vertical Detector : Average

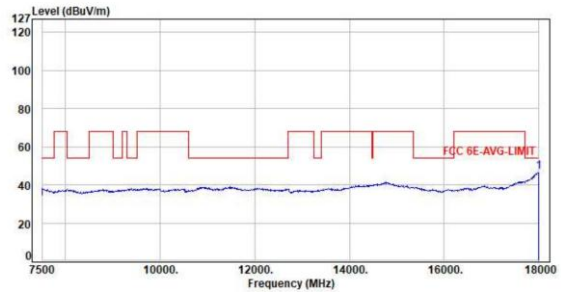

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.42	46.71	54.00	-7.29	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH195 NSS1 MCS0
Pol : Horizontal Detector : Peak

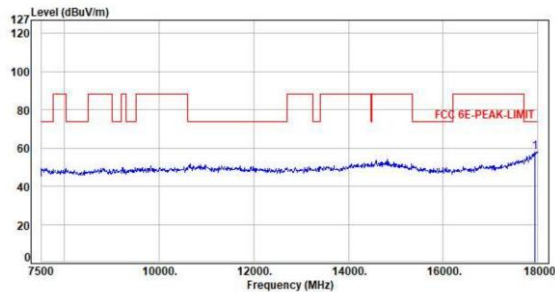

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17937.00	12.04	46.10	58.14	74.00	-15.86	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH195 NSS1 MCS0
Pol : Horizontal Detector : Average

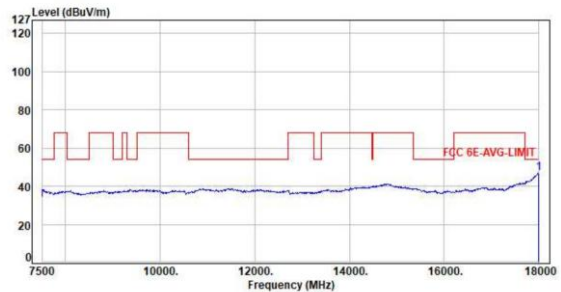


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.41	46.70	54.00	-7.30	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH211 NSS1 MCS0
Pol : Vertical Detector : Peak

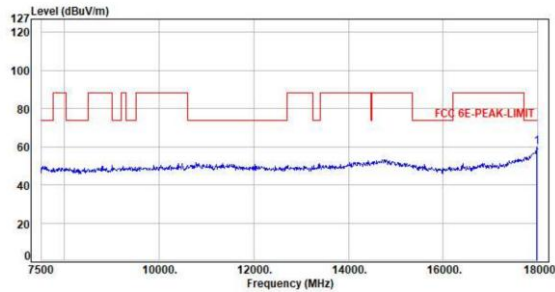

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	46.71	59.74	74.00	-14.26	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH211 NSS1 MCS0
Pol : Vertical Detector : Average

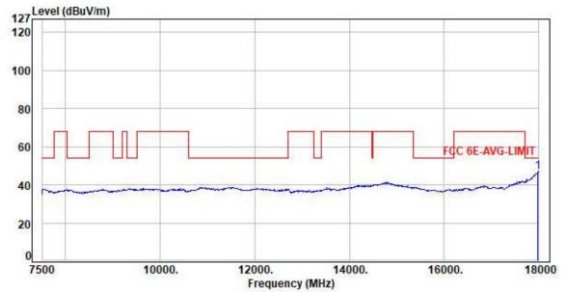

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.76	46.79	54.00	-7.21	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH211 NSS1 MCS0
Pol : Horizontal Detector : Peak

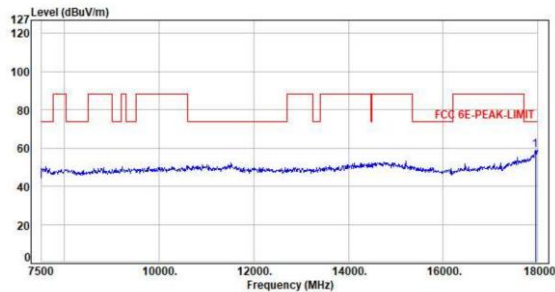

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17947.50	12.27	46.75	59.02	74.00	-14.98	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH211 NSS1 MCS0
Pol : Horizontal Detector : Average

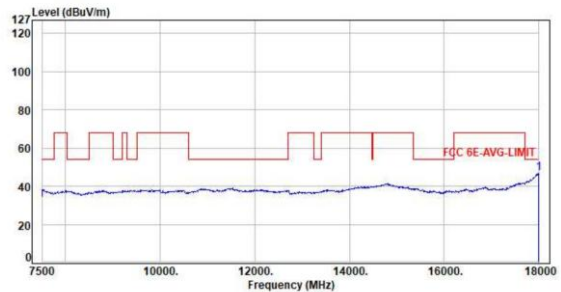


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.56	46.85	54.00	-7.15	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH227 NSS1 MCS0
Pol : Vertical Detector : Peak

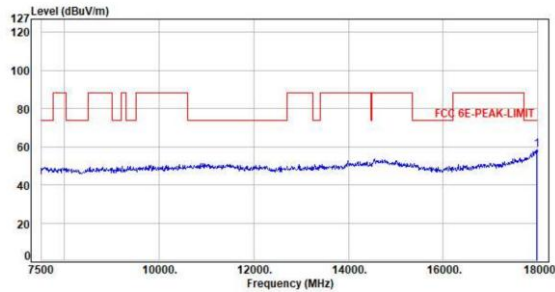

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17968.50	12.78	45.42	58.20	74.00	-15.80	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH227 NSS1 MCS0
Pol : Vertical Detector : Average

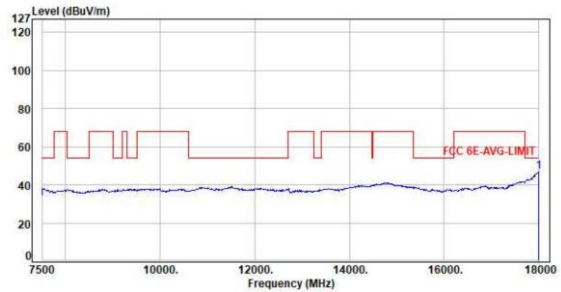

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.32	46.61	54.00	-7.39	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH227 NSS1 MCS0
Pol : Horizontal Detector : Peak

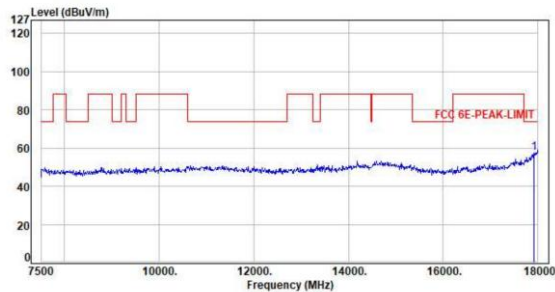

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17926.50	11.81	45.85	57.66	74.00	-16.34	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH227 NSS1 MCS0
Pol : Horizontal Detector : Average

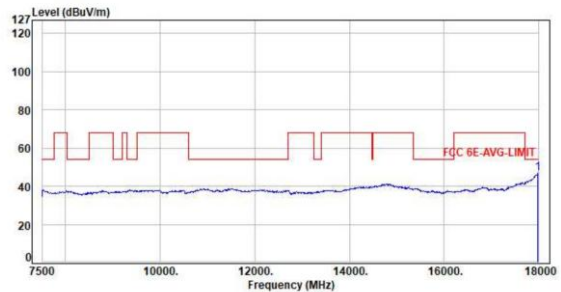


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	34.00	47.03	54.00	-6.97	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH199 NSS1 MCS0
Pol : Vertical Detector : Peak

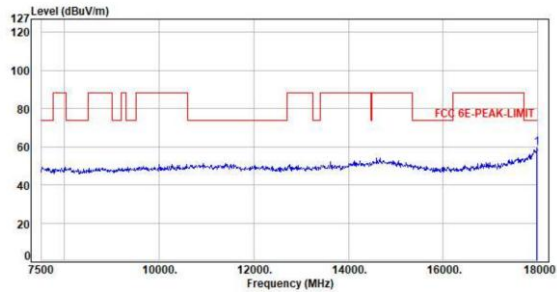

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	46.22	59.25	74.00	-14.75	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH199 NSS1 MCS0
Pol : Vertical Detector : Average

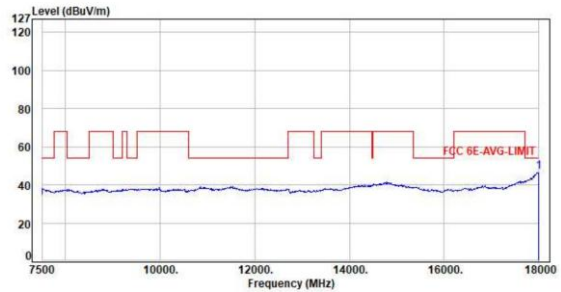

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.41	46.70	54.00	-7.30	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH199 NSS1 MCS0
Pol : Horizontal Detector : Peak

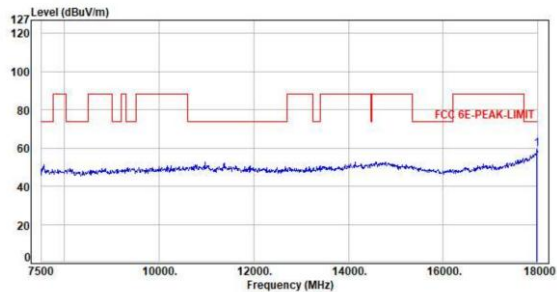

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	46.60	59.63	74.00	-14.37	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH199 NSS1 MCS0
Pol : Horizontal Detector : Average

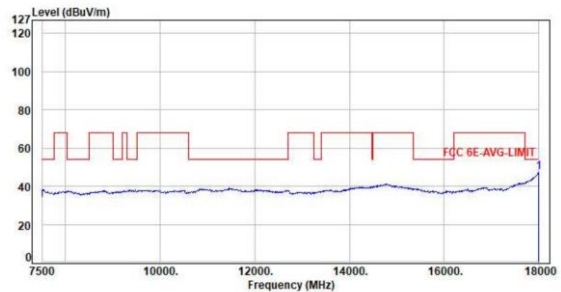


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.94	47.23	54.00	-6.77	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH215 NSS1 MCS0
Pol : Vertical Detector : Peak

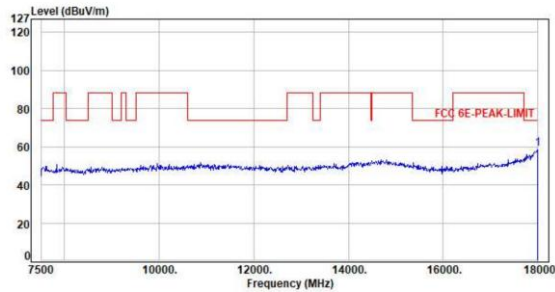

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	45.56	58.85	74.00	-15.15	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH215 NSS1 MCS0
Pol : Vertical Detector : Average

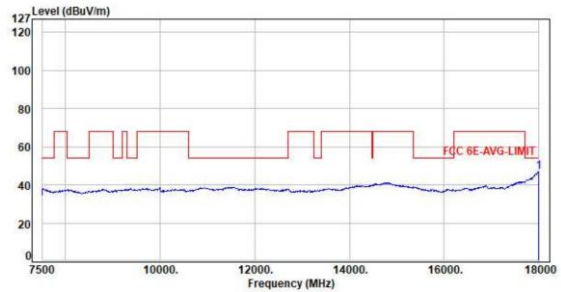

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.60	46.89	54.00	-7.11	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH215 NSS1 MCS0
Pol : Horizontal Detector : Peak

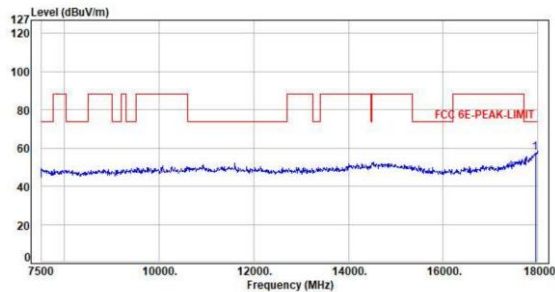

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17947.50	12.27	45.39	57.66	74.00	-16.34	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH215 NSS1 MCS0
Pol : Horizontal Detector : Average

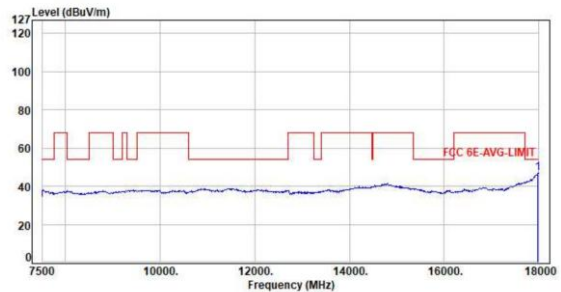


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.85	46.88	54.00	-7.12	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Pol : Vertical Detector : Peak

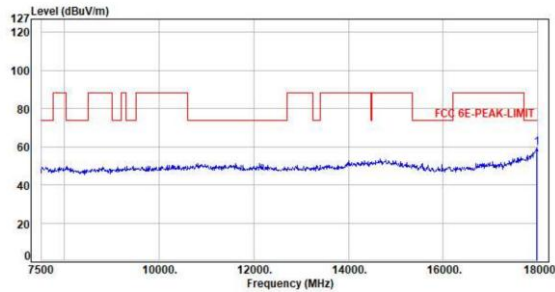

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	46.31	59.34	74.00	-14.66	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Pol : Vertical Detector : Average

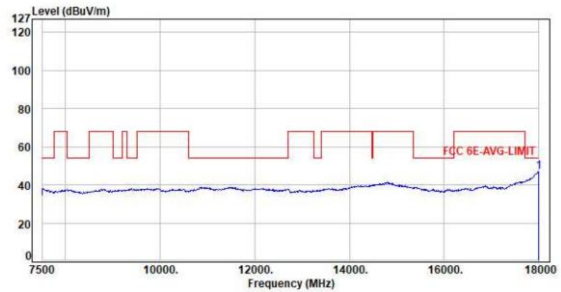

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.44	46.73	54.00	-7.27	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Pol : Horizontal Detector : Peak

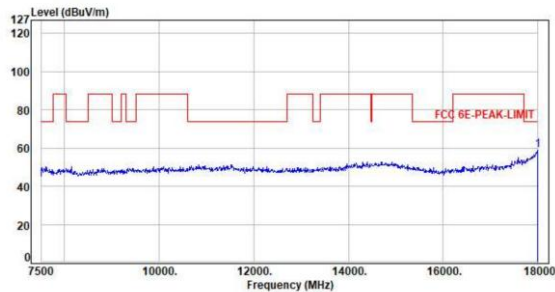

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	45.55	58.84	74.00	-15.16	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Pol : Horizontal Detector : Average

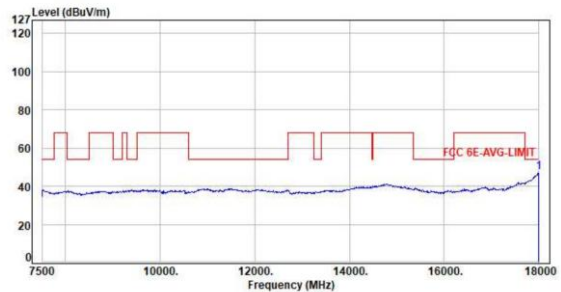


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.50	13.29	33.84	47.13	54.00	-6.87	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH185 NSS1 MCS0
Pol : Vertical Detector : Peak

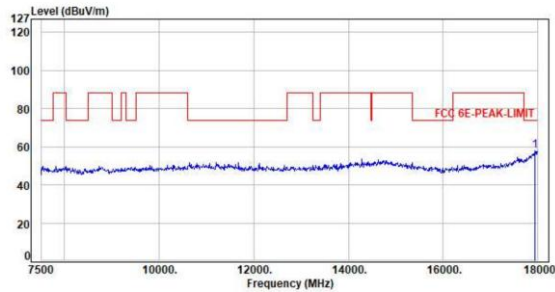

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17937.00	12.04	45.86	57.90	74.00	-16.10	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH185 NSS1 MCS0
Pol : Vertical Detector : Average

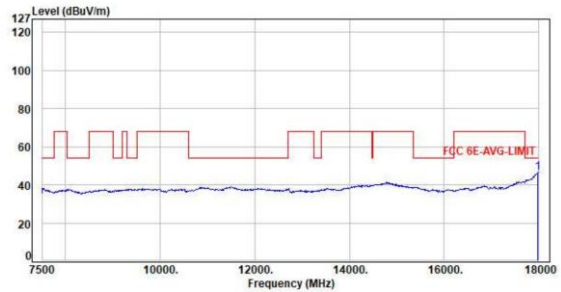

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.47	46.50	54.00	-7.50	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH185 NSS1 MCS0
Pol : Horizontal Detector : Peak

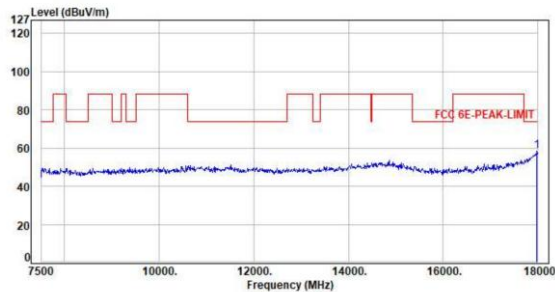

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.56	58.59	74.00	-15.41	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH185 NSS1 MCS0
Pol : Horizontal Detector : Average

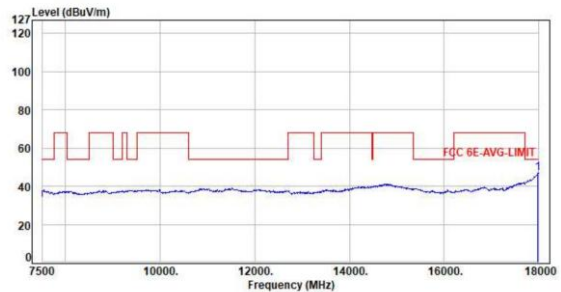


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.72	46.75	54.00	-7.25	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH115 NSS1 MCS0
Pol : Vertical Detector : Peak

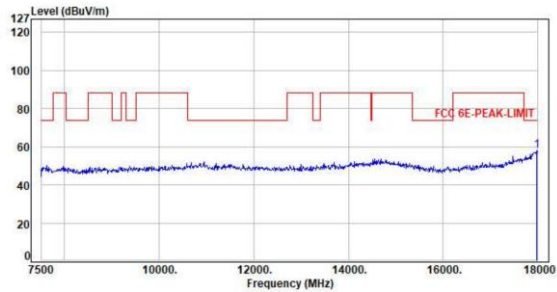

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17968.50	12.78	45.00	57.78	74.00	-16.22	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH115 NSS1 MCS0
Pol : Vertical Detector : Average

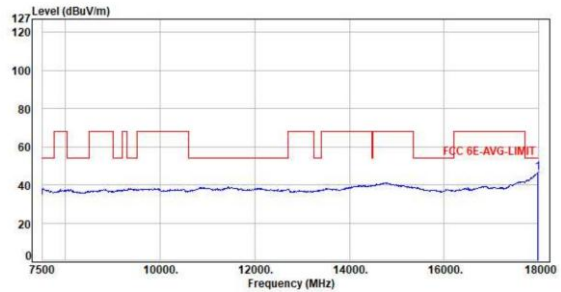

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.50	46.53	54.00	-7.47	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH115 NSS1 MCS0
Pol : Horizontal Detector : Peak

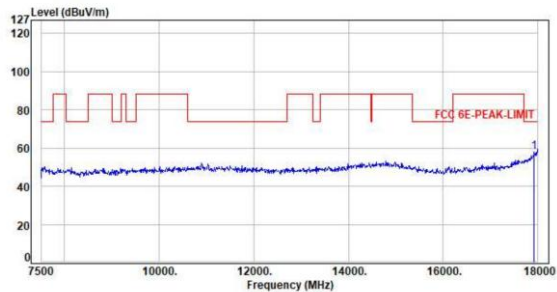

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17926.50	11.81	45.90	57.71	74.00	-16.29	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH115 NSS1 MCS0
Pol : Horizontal Detector : Average

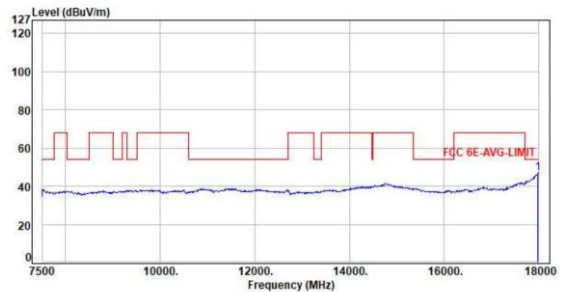


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.69	46.72	54.00	-7.28	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH187 NSS1 MCS0
Pol : Vertical Detector : Peak

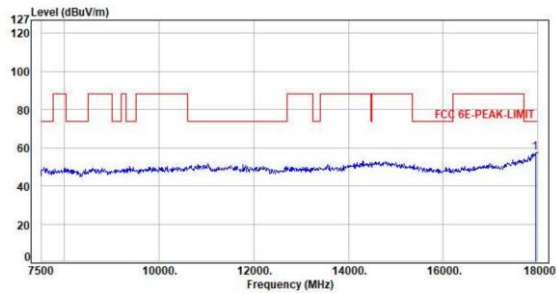

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17947.90	12.27	45.34	57.61	74.00	-16.39	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH187 NSS1 MCS0
Pol : Vertical Detector : Average

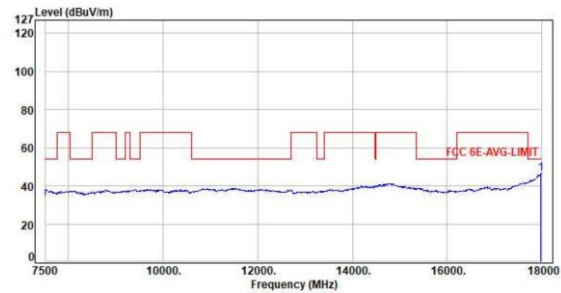

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.56	46.59	54.00	-7.41	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be40 CH187 NSS1 MCS0
Pol : Horizontal Detector : Peak

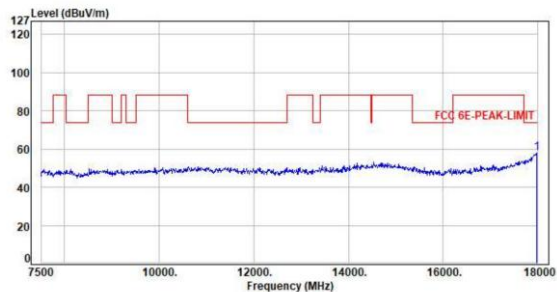

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	44.97	58.00	74.00	-16.00	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH187 NSS1 MCS0
Pol : Horizontal Detector : Average

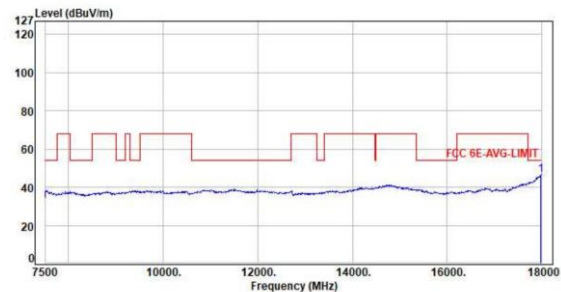


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.38	46.41	54.00	-7.59	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH119 NSS1 MCS0
Pol : Vertical Detector : Peak

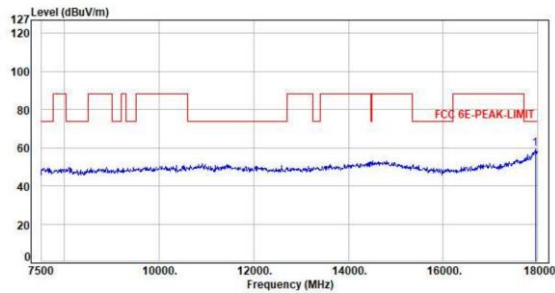

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17947.50	12.27	47.00	59.27	74.00	-14.73	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH119 NSS1 MCS0
Pol : Vertical Detector : Average

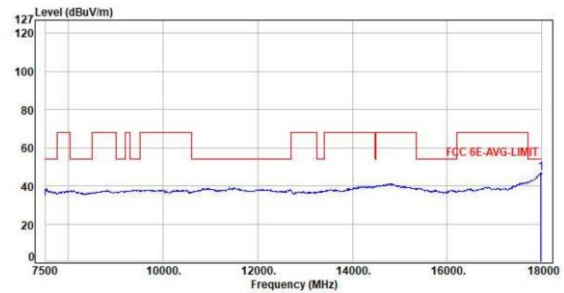

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.84	46.87	54.00	-7.13	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH119 NSS1 MCS0
Pol : Horizontal Detector : Peak

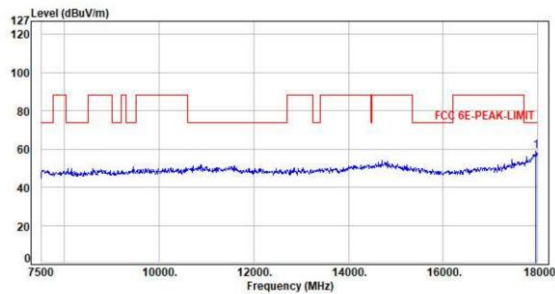

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17958.00	12.53	46.25	58.78	74.00	-15.22	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH119 NSS1 MCS0
Pol : Horizontal Detector : Average

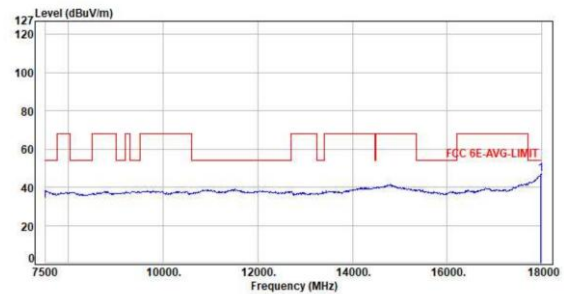


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.90	46.93	54.00	-7.07	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH183 NSS1 MCS0
Pol : Vertical Detector : Peak

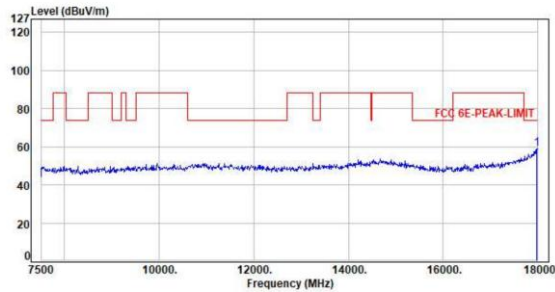

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	45.66	58.69	74.00	-15.31	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH183 NSS1 MCS0
Pol : Vertical Detector : Average

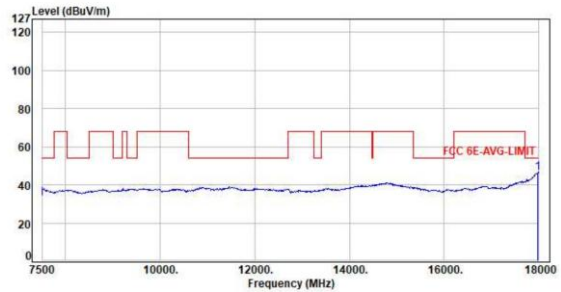

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.53	46.56	54.00	-7.44	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be80 CH183 NSS1 MCS0
Pol : Horizontal Detector : Peak

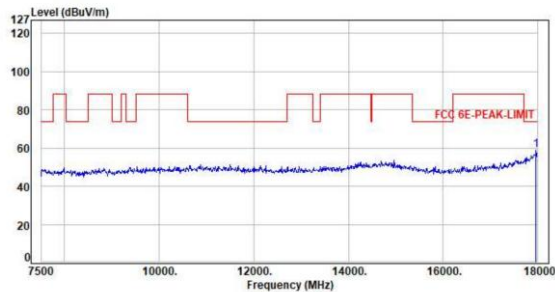

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17958.00	12.53	46.49	59.02	74.00	-14.98	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH183 NSS1 MCS0
Pol : Horizontal Detector : Average

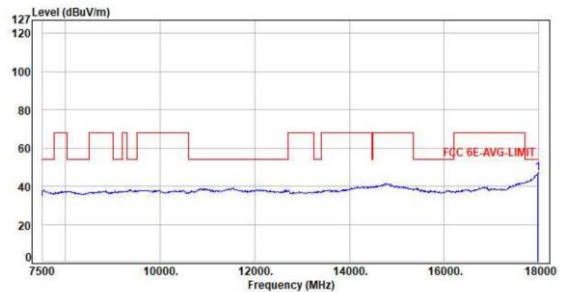


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.91	46.94	54.00	-7.06	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH111 NSS1 MCS0
Pol : Vertical Detector : Peak

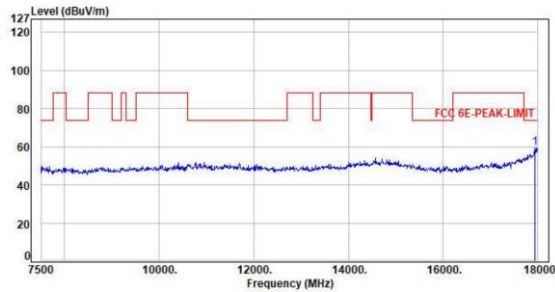

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17937.00	12.04	47.20	59.24	74.00	-14.76	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH111 NSS1 MCS0
Pol : Vertical Detector : Average

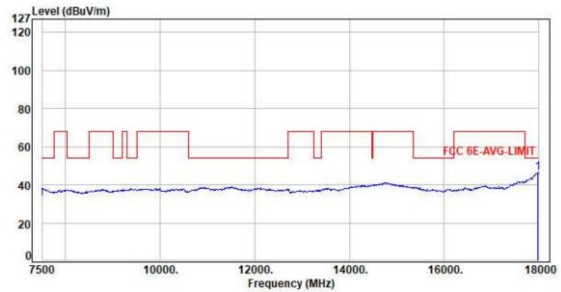

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.50	46.53	54.00	-7.47	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160 CH111 NSS1 MCS0
Pol : Horizontal Detector : Peak

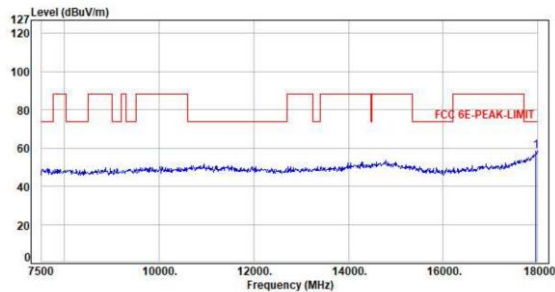

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17958.00	12.53	45.86	58.39	74.00	-15.61	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH111 NSS1 MCS0
Pol : Horizontal Detector : Average

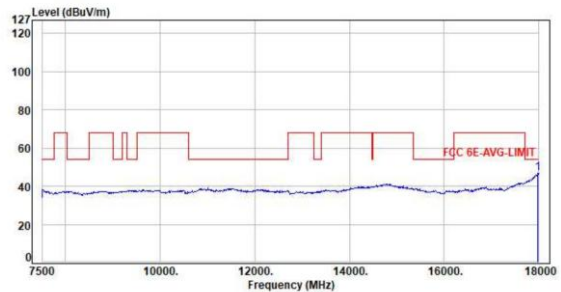


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.62	46.65	54.00	-7.35	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160CH175 NSS1 MCS0
Pol : Vertical Detector : Peak

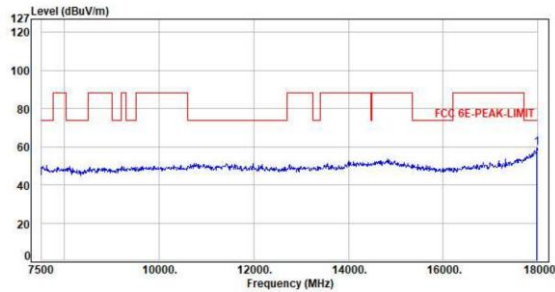

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	46.30	59.33	74.00	-14.67	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160CH175 NSS1 MCS0
Pol : Vertical Detector : Average

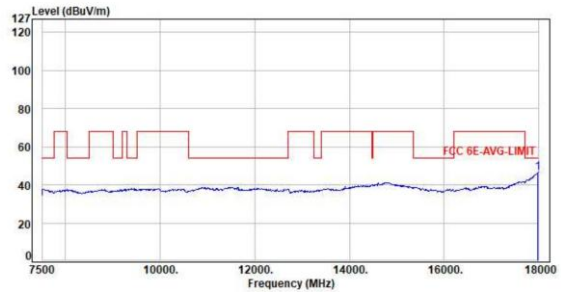

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.35	46.38	54.00	-7.62	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be160CH175 NSS1 MCS0
Pol : Horizontal Detector : Peak

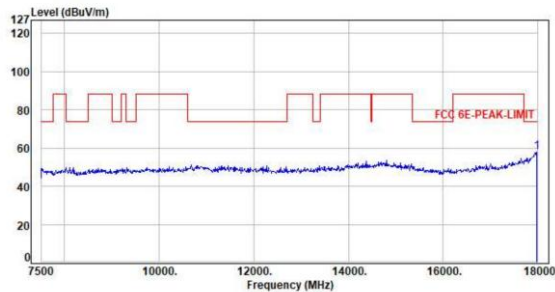

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	44.87	57.90	74.00	-16.10	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160CH175 NSS1 MCS0
Pol : Horizontal Detector : Average

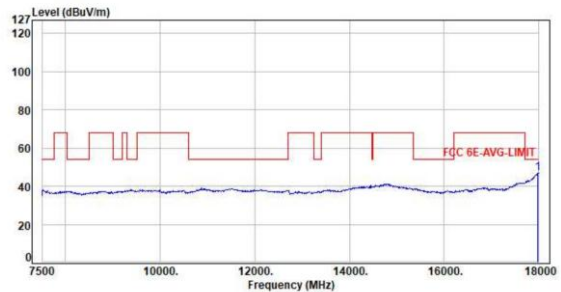

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17979.00	13.03	33.57	46.60	54.00	-7.40	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Result and Data (18GHz ~ 40GHz)

Test Mode : 2TX 11be40 CH195 NSS1 MCS0

Pol : Vertical

Detector : Peak

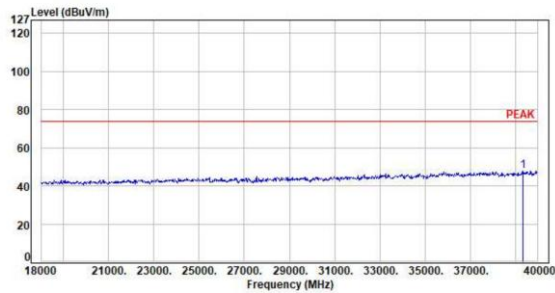

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	39340.00	8.81	39.15	47.96	74.00	-26.04	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH195 NSS1 MCS0

Pol : Horizontal

Detector : Peak

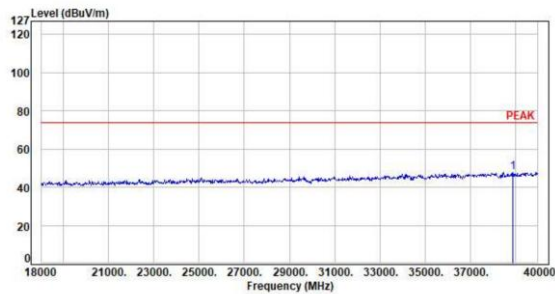

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	38878.00	8.34	39.66	48.00	74.00	-26.00	Peak	150	0	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor