

TEST REPORT

Report No: KST-FCR-130002

Applicant	Name	Bluebird Soft Inc.
	Address	SEI Tower 13~14, 467-14, Dogok-dong, Gangnam-gu, Seoul, Korea
Manufacturer	Name	Bluebird Soft Inc.
	Address	SEI Tower 13~14, 467-14, Dogok-dong, Gangnam-gu, Seoul, Korea
Equipment	Name	Windows Business PAD
	Model No	BP80
	Brand	PIDION
	FCC ID	RBF-BP80
Test Standard	FCC CFR 47, Part 15. Subpart C-15.225	
Test Date(s)	2013. 01. 10 ~ 2013. 01. 15	
Issue Date	2013. 01. 16	
Test Result	Compliance	
Note	This equipment contained the certified CDMA EVDO800 MHz, GSM 900/1800 MHz, WLAN 802.11abgn, Bluetooth 4.0.	

Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C 63.4-2003.

We attest to the accuracy of data and all measurements reported herein were performed by KOSTEC Co., Ltd. and were made under Chief Engineer's supervision. We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by Mi Young, Lee

Approved by Gyeong Hyeon, Park

Signature



Signature



Table of Contents

1. GENERAL INFORMATION	3
1.1 Test Facility	3
1.2 Location	3
2. EQUIPMENT DESCRIPTION	4
3. SYSTEM CONFIGURATION FOR TEST	5
3.1 Characteristics of equipment.....	5
3.2 Used peripherals list.....	5
3.3 Product Modification	5
3.4 Operating Mode.....	5
3.5 Test Setup of EUT	5
3.6 Used Test Equipment List.....	6
4. SUMMARY TEST RESULTS	7
5. MEASUREMENT RESULTS	8
5.1 Carrier Frequency tolerance.....	8
5.2 Field strength of radiated emissions	9
5.3 AC Power Conducted emissions	15
5.4 Antenna requirement	19
5.5 20 dB bandwidth measurement.....	20

1. GENERAL INFORMATION

1.1 Test Facility

Test laboratory and address

KOSTEC Co., Ltd.

180-254, Annyeong-dong, Hwaseong-si, Gyeonggi-do, South Korea

The open area field test site and conducted measurement facility are used for these testing. This site at was fully described in a reports submitted to the Federal Communications Commission (FCC).

The details of these reports have been found to be in complies with the requirements of Section 2.948 of the FCC Rules on November 14, 2002. The facility also complies with the radiated and conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission (FCC) has the reports on file and KOSTEC Co., Ltd. is listed under FCC Registration No.525762. The test site has been approved by the FCC for public use and is List in the FCC Public Access Link CORES (Commission Registration System)

Registration information

KCC (Korea Communications Commission) Number : KR0041


KOLAS(Korea Laboratory Accreditation Scheme) Number : 232

FCC Registration Number(FRN) : 525762

VCCI Registration Number : R-1657 / C -1763

IC Registration Site Number : 8305A-1

1.2 Location

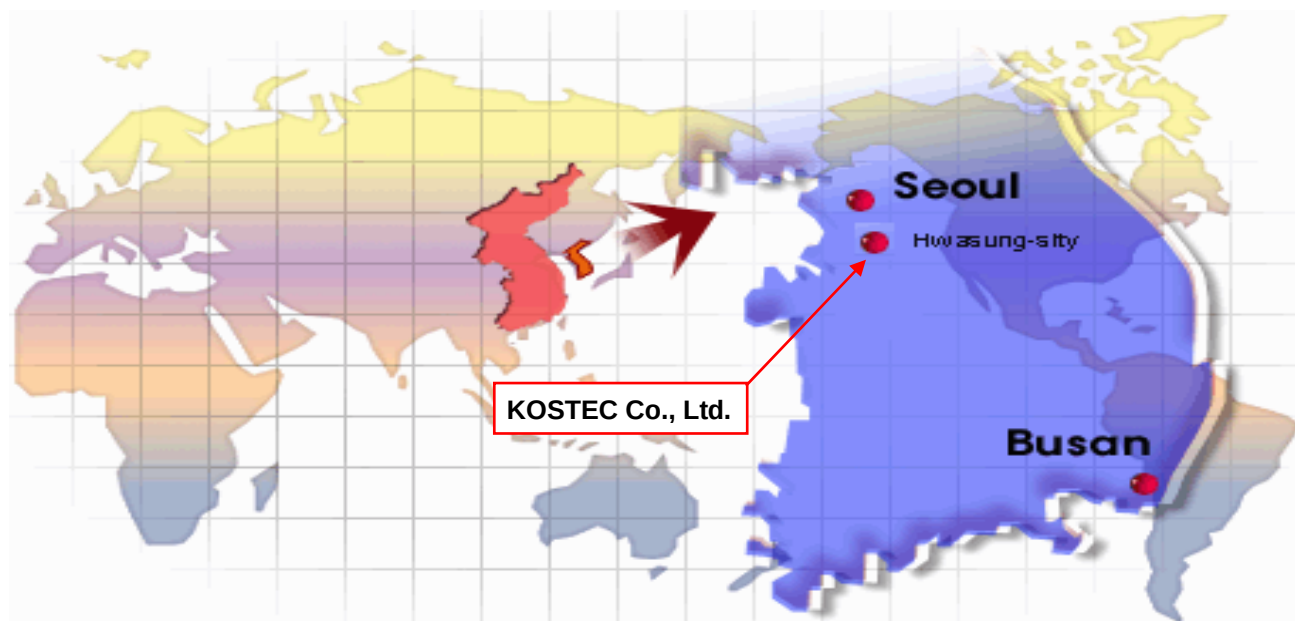

2. EQUIPMENT DESCRIPTION

The product specification described herein was declared by manufacturer. And refer to user's manual for the details.

1) Equipment Name	Windows Business PAD
2) Model No	BP80
3) Brand Name	PIDION
4) Usage	Windows Business PAD
5) Serial Number	Proto type
6) ITU emission Code	Not required (because it is unlicensed devices)
7) Oscillation Type	X-tal
8) Data connection Type	RFID (Radio Frequency Identification)
9) Modulation type	ASK
10) Field Strength	33.31 dB μ W/m @ 30 meter**
11) Operated Frequency	13.56 MHz
12) Channel Number	1 ea
13) Communication Type	Half duplex
15) Final Amplifier	U122
16) Operation temperature	- 20 °C ~ + 55 °C
17) Power Source	AC/DC adapter Input : AC 100-240 V, 1.7 A, 50-60 Hz Output : DC 19 V, 2.11 A Battery : DC 7.4 V
18) Antenna Description	PCB antenna with a unique coupling.
19) FCC ID	RBF-BP80

** it is maximum peak conducted power in band

3. SYSTEM CONFIGURATION FOR TEST

3.1 Characteristics of equipment

The Equipment Under Test (EUT) contains the following capabilities:

CDMA EVDO800 MHz, GSM 900/1800 MHz, WLAN 802.11abgn, Bluetooth 4.0, RFID.

The test data contained in this report pertains only to the emissions due to the RFID transmitter of the EUT.

Manufacturer / Model	FCC ID	Description
Qualcomm Atheros, Inc. / AR5B22	PPD-AR5B22	PCIE 802.11a/b/g/n 2.4GHz/5GHz + USB BT 4.0 card
QUALCOMM INC / Gobi3000	J9CGOBI3000	GSM 850/900/1800/1900 GPRS/EGPRS, WCDMA FDD1,2,4,5,6&8 with HSDPA, HSUPA, CDMA2000 with CDMA1x/1x-EVDO and GPS

3.2 Used peripherals list

Description	Model No.	Serial No.	Manufacture	Remark
Adaptor	KPL-040K	None	Ningbo ISO Electronics Co., Ltd.	
LCD Monitor	V2410f	CN-0G550M-72872-9CT-05HL	Dell Inc	
Mouse	M-BJ58	None	LOGITECH	
Earphone	None	None	None	
micro SD Card	None	None	Lexar	
micro USIM Card	None	None	None	-

3.3 Product Modification


N/A

3.4 Operating Mode

- * Constantly transmitting with a modulated carrier at maximum power.
- * Radiated emissions tests were performed with all unused ports terminated.

3.5 Test Setup of EUT

The measurements were taken in continuous transmit / receive mode on condition that EUT was read a RFID card.



3.6 Used Test Equipment List

No.	Instrument	Model	Serial No.	Manufacturer	Due to Cal. Date	Used
1	Tem & Hum Chamber	EY-101	90E14260	TABAI ESPEC	2013.10.05	☒
2	Spectrum Analyzer	8563E	3846A10662	Agilent Technology	2013.01.27	☒
3	Spectrum Analyzer	FSP	100083	Rohde & Schwarz	2013.03.02	☒
4	Vector signal Analyzer	89441A	3416A02620	Agilent Technology	2013.05.18	☐
5	Radio communication Analyzer	MT8815A	6200429622	ANRITSU	2013.03.02	☐
6	CDMA Mobile Station Test Set	E8285A	US40081298	Agilent Technology	2013.03.02	☐
7	Test Receiver	ESPI3	100109	Rohde & Schwarz	2013.03.02	☐
8	EMI Test receiver	ESCI7	100823	Rohde & Schwarz	2013.02.17	☒
9	Modulation analyzer	8901A	3538A07071	Agilent Technology	2013.05.18	☐
10	Audio analyzer	8903B	3514A16919	Agilent Technology	2013.05.18	☐
11	EPM Series Power meter	E4418B	GB39512547	Agilent Technology	2013.05.18	☐
12	RF Power Sensor	ECP-E18A	US37181768	Agilent Technology	2013.05.18	☐
13	Microwave Frequency Counter	5352B	2908A00480	Agilent Technology	2013.05.18	☐
14	Digital storage Oscilloscope	TDS3052	B015962	Tektronix	2013.10.05	☐
15	Multi meter	DM-313	S60901832	LG Precision Co.,Ltd.	2013.05.18	☐
16	Digital Signal Generator	E4436B	US39260458	H.P	2013.05.18	☐
17	Digital Signal Generator	E4438C	MY42083133	Agilent Technology	2013.10.05	☐
18	Signal Generator	SML03	100692	Agilent Technology	2013.03.13	☐
19	Tracking CW Signal Source	85645A	070521-A1	H.P	2013.05.18	☒
20	Ultra broadband Antenna	HL562	100075	Rohde & Schwarz	2014.04.13	☒
21	Ultra broadband Antenna	HL562	100076	Rohde & Schwarz	2012.12.08	☐
22	Dipole Antenna	HZ-12	100005	Rohde & Schwarz	2014.04.19	☐
23	Dipole Antenna	HZ-13	100007	Rohde & Schwarz	2014.04.19	☐
24	Horn Antenna	3115	2996	EMCO	2014.07.04	☐
25	Horn Antenna	3115	9605-4834	EMCO	2014.05.15	☐
26	Loop Antenna	6502	9203-0493	EMCO	2013.06.03	☒
27	AMPLIFIER	8447D	2944A07881	HP	2013.03.02	☒
28	AMPLIFIER	TK-PA6S	12009	TESTEK	2013.05.18	☐
29	Dummy Load	8173	3780	Bird Electronic	2013.05.18	☐
30	Attenuator	8498A	3318A09485	H.P	2013.05.18	☒
31	Attenuator	50FH-030-500	1404109433	JEW Industries Inc.	2013.05.18	☐
32	Attenuator	UFA-20NPJ-20	IF836	TAMAGAWA Electronic	2013.05.18	☐
33	Band rejection filter	3TNF-0006	26	Dover Tech	2013.05.18	☐
34	Band rejection filter	3TNF-0007	311	Dover Tech	2013.05.18	☐
35	Band rejection filter	3TNF-0008	317	Dover Tech	2013.05.18	☐
36	High pass filter	WHJS1100-10EF	1	Wainwright Instrument Gmbh.	2013.05.18	☐
37	High pass filter	WHJS3000-10EF	1	Wainwright Instrument Gmbh.	2013.05.18	☐
38	Directional coupler	779D	07271	H.P	2013.05.18	☐
39	3 Way power divider	KPDSU3W	00070365	KMW	2013.03.02	☐
40	SLIDAC	None	0207-4	Myoung-Sung Electronic Co., Ltd.	2013.05.18	☐
41	DC Power supply	DRP-5030	9028029	Digital Electronic Co.,Ltd	2013.05.18	☐
42	DC Power supply	UP-3005T	68	Unicon Co.,Ltd	2013.05.18	☐
43	DC Power supply	E3610A	KR24104505	Agilent Technology	2013.05.18	☒
44	Thermo Hygrometer	PC-7800W	None	SATO	2013.10.06	☒
45	HYGRO-Thermograph	NSII-Q	1611545	SATO	2013.10.06	☒
46	Barometer	7612	81134	SATO	2014.01.15	☒

4. SUMMARY TEST RESULTS

Description of Test	FCC Rule	Reference Clause	Used	Test Result
Carrier frequency tolerance	15.225(e)	Clause 5.1	☒	Compliance
Field strength of radiated emission	15.225(a) ~ (d)	Clause 5.2	☒	Compliance
AC Conducted emission	15.207	Clause 5.3	☒	Compliance
Antenna requirement	15.203, 15.247	Clause 5.4	☒	Compliance
20 dB bandwidth measurement	2.1049	Clause 5.4	☒	Compliance
Compliance/pass : The EUT complies with the essential requirements in the standard. Not Compliance : The EUT does not comply with the essential requirements in the standard. N/A : The test was not applicable in the standard.				

5. MEASUREMENT RESULTS

5.1 Carrier Frequency tolerance

5.1.1 Standard Applicable [FCC §15.225(e)]

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency Over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation In the primary supply from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


5.1.2 Test Environment conditions

- Ambient temperature : $23\text{ }^{\circ}\text{C}$,
- Relative Humidity : ($58 - 60$) % R.H.

5.1.3 Measurement Procedure

Before measurements are made the equipment shall have reached thermal balance in the Test chamber period. and then it is normal operating for about 15 minutes after thermal balance has been reached. For tests at the extreme temperature, the equipment shall be left in the test chamber until thermal balance is attained, then the standby or receive condition for a period of a few minute after which the equipment shall meet the specified requirements. The test data sheet recorded measured value by frequency counter.

5.1.4 Test setup

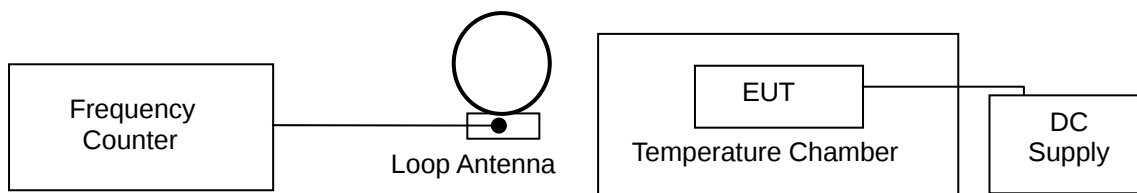

5.1.5 Measurement Result

Frequency (13.56 MHz)			Measured frequency [Hz]	Frequency Tolerance	
				%	Hz
T _{NOM} + 23 °C	V _{NOM}	19.00 Vdc	13.560984	0.00726	+984
	V _{MIN}	16.15 Vdc	13.560975	0.00719	+975
	V _{MAX}	21.85 Vdc	13.560971	0.00716	+971
T _{MIN} - 20 °C	V _{NOM}	19.00 Vdc	13.560997	0.00735	+997
T _{MAX} + 55 °C	V _{NOM}	19.00 Vdc	13.560985	0.00726	+985
LIMIT			Within in (±) 0.01 % or (±) 1 356 Hz		
Max. Tolerance			0.00081 %, (±) 110 Hz		
Result			Compliance		

5.2 Field strength of radiated emissions

5.2.1 Standard Applicable [FCC §15.225 (a) ~ (d)]

(a) The Field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 $\mu\text{V}/\text{m}$ at 30 meter

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 micro volts/meter at 30 meter

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 micro volts/meter at 30 meter

(d) The Field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed The general radiated emission limits in §15.209

Above required standard (a ~ c) and (d) is brief describe table as follows

§ 15.225 [(a) ~ (c)] : Limit for in-band field strength

Frequency Band (MHz)	Limit		Measurement distance (meter)
	($\mu\text{V}/\text{m}$)	(dB $\mu\text{V}/\text{m}$)	
13.553 – 13.567	15,848	84.00	30
13.410 – 13.553 13.567 – 13.710	334	50.47	30
13.110 – 13.410 13.710 – 14.010	106	40.50	30

§15.209. limits for radiated emissions measurements

Frequency Band	Limit [$\mu\text{V}/\text{m}$]	Limit [dB $\mu\text{V}/\text{m}$]	Measurement distance (meter)	Detector
0.009 – 0.490	2 400/F (kHz)	-	300	
0.490 – 1.705	2 4000/F (kHz)	-	30	
1.705 – 30.0	30	29.54	30	Quasi peak
30 - 88	100 **	40.0	3	Quasi peak
88 - 216	150 **	43.5	3	Quasi peak
216 - 960	200 **	46.0	3	Quasi peak
Above 960	500	54.0	3	Peak & Average

** fundamental emissions from intentional radiators operation under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, or 470-806 MHz. However, operation within these Frequency bands is permitted under other sections of this Part Section 15.231 and 15.241

§15.205. [Table 1] : Restrict Band of Operation

Only spurious emissions are permitted in any of the frequency bands listed below ;

[MHz]	[MHz]	[MHz]	[GHz]
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505**	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6

** Until February 1, 1999, this restricted band shall be 0.490-0.510

5.2.2 Test Environment conditions

- Ambient temperature : 22 °C,
- Relative Humidity : (58 ~ 60) % R.H.

5.2.3 Measurement Procedure

The measurements procedure of the transmitter radiated E-field is as following describe method.

The test is performed in a Shield chamber to determine the accurate frequencies, after maximum emissions level will be checked on a test chamber and measuring distance is 3 m from EUT to test antenna.

(The chamber is ensured that comply with at least 6 dB above the ambient noise level)

- ① The EUT was powered ON with continuously operating mode and placed on a 0.8 meter high non-conductive table on the reference ground plane.
- ② The test antenna was used on Horn antenna for above 1 GHz, and if the below 1 GHz, broad-band antenna and Loop antenna were used for below 30 MHz and it's antenna positioned in both the horizontal and vertical plane was location at EUT during the test for maximized the emission measurement.
- ③ The output of the test antenna will be connected to a measuring receiver, and it is set to tuned over the frequency range according to required standard
- ④ The measuring detector type of the measurement receiver is based on average value of measurement instrumentation employing a CISPR Quasi Peak detector according to required standard and for above 1 GHz, set the spectrum analyzer on a average and peak detector for the provisions in §15.35 and investigated frequency range is set the spectrum analyzer according to §15.33.
- ⑤ The fundamental frequency at which a relevant radiated signal component is detected, the test antenna

will be raised and lowered through the specified range of heights in horizontal and vertical polarized orientation, until an maximum signal level is detected on the measuring receiver.


- ⑥ The transmitter is position x,y,z axis on rotating through 360 degrees, until the maximum signal level is detected by the measuring receiver.
- ⑦ The receiver is scanned from requested measuring frequency band and then the maximum meter reading is recorded. The radiated emissions were measured with required standard.
- The measurement results are obtained as described below:
$$\text{Result(dB } \mu\text{V/m)} = \text{Reading(dB } \mu\text{V)} + \text{Antenna factor(dB/m)} + \text{CL(dB)} + \text{other applicable factor (dB)}$$
- According to §15.33 (a)(1), Frequency range of radiated measurement is performed the tenth harmonic.
- ※ if necessary, additionally receiver is adopted high-pass filter and preamp because lower radiated signal
- ※ The transmitter radiated spectrum was investigated from 9 kHz to 10th harmonic and the worst-case emissions were reported.

5.2.4 Measurement Uncertainty


All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are test receiver, Cable loss, Antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, Antenna frequency interpolation, measurement distance variation, Site imperfection, mismatch, and system repeatability based on NIS 80,81, The measurement uncertainty level with a 95 % confidence level were apply to Uncertainty of a radiation emissions measurement at Chamber of KOSTEC is ± 6.0 dB

5.2.5 Test Configuration


Radiated emission setup, Below 30 MHz

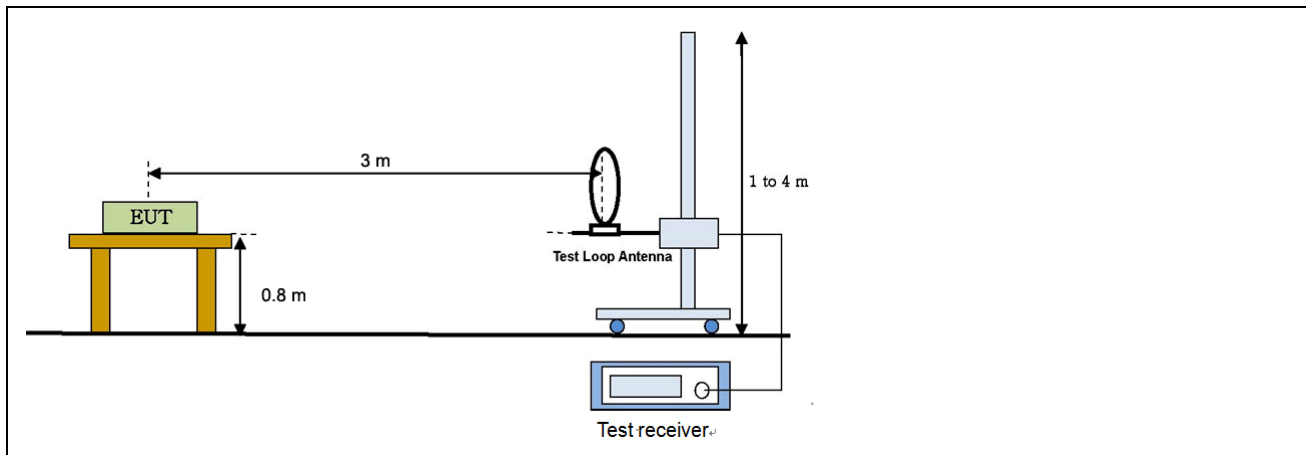

Radiated emission setup, Below 1 000 MHz

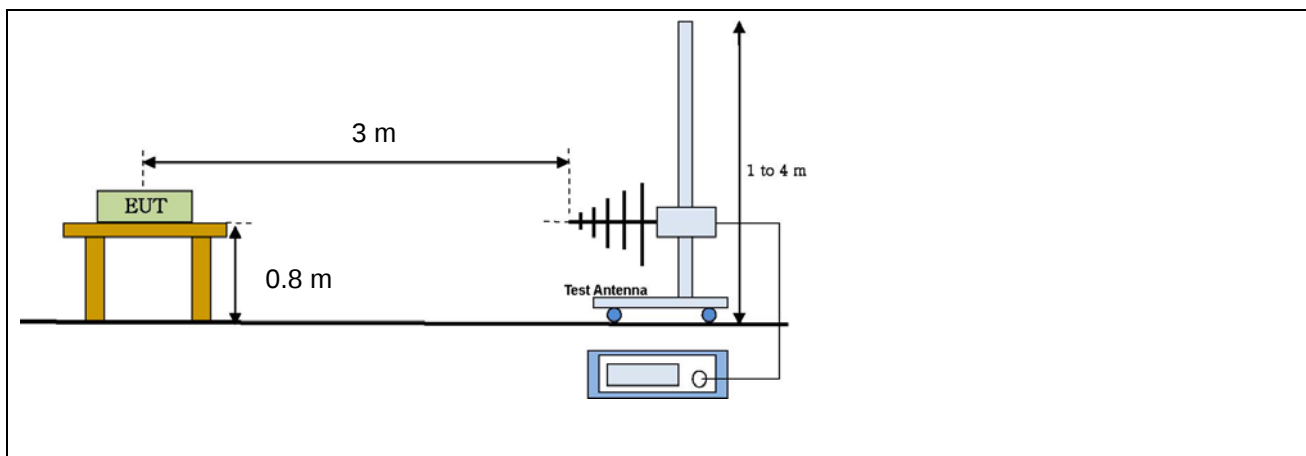

Radiated emission setup, Above 1 GHz

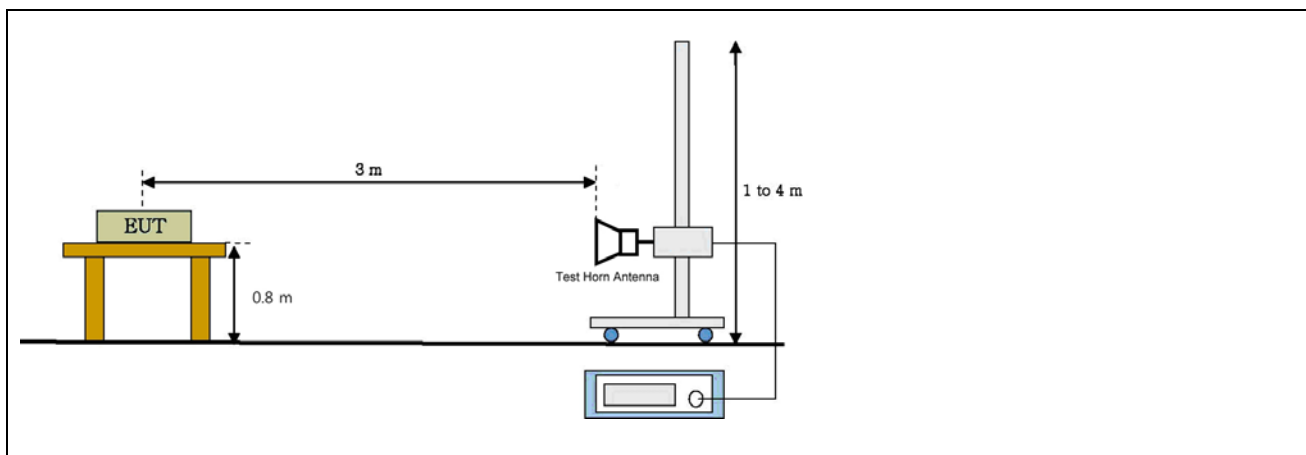

5.2.6 Measurement Result

■ IN-BAND

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Pstn (axis)	Antenna			CL (dB)	Pre AMP (dB)	Distn factor (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
				Height (m)	Pol. (H/V)	Fctr. (dB/m)							
13.560*	42.99	120	X	1.5	-	8.84	0.56	-	-19.08	33.31	84.00	50.69	Compliance
13.236	32.28	130	X	1.5	-	8.84	0.56	-	-19.08	22.60	40.50	17.90	Compliance
13.372	32.69	120	X	1.5	-	8.84	0.56	-	-19.08	23.01	40.50	17.49	Compliance
13.646	32.59	120	X	1.5	-	8.84	0.56	-	-19.08	22.91	50.47	27.56	Compliance
13.880	33.80	120	X	1.5	-	8.84	0.56	-	-19.08	24.12	40.50	16.38	Compliance

*It is fundamental frequency

Note1. above measured frequency have been done at 10 m distance and corrected according to required FCC 15.209. e)

$\therefore$ Extrapolation distance factor : $40\log(10/30) = -19.08$ dB If Measurement distance is 10 m and Mandatory requirement distance is 30 m at 30 MHz or less, extrapolation distance factor(dB) is $40 / \text{decade} = 40 \log_{10}^{(MRD/MD)}$

MRD is Mandatory requirement distance and MD is Measured distance

Note2. above measured frequencies is apply required standard FCC Part 15.225

Note3. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.

Note4. All measurements were recorded using a quasi-peak detector.

Freq.(MHz) : Measurement frequency, Reading(dB μ V/m) : Indicated value for test receiver,

Table (Deg) : Directional degree of Turn table, Pstn(axis) : Location axis of EUT

Antenna (Height, Pol, Fctr) : Antenna Height, Polarization and Factor

Cbl(dB) : Cable loss, Distn factor(dB) : distance correction factor [40 dB/decade as per § 15.31f (2)]

Meas Result (dB μ V/m) : Reading(dB μ V/m) + Antenna factor.(dB/m) + CL(dB) + Distn factor(dB)

Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB) : FCC Limit (dB μ V/m) – Meas Result(dB μ V/m)

■ OUT- BAND

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
266.68	19.35	120	1.5	V	10.65	3.11	-	33.11	46.0	12.89	Compliance
437.40	15.59	130	1.5	V	14.86	3.28	-	33.73	46.0	12.27	Compliance
687.66	14.34	120	1.5	V	19.04	4.22	-	37.60	46.0	8.40	Compliance
813.76	12.15	120	1.5	V	20.48	6.20	-	38.83	46.0	7.17	Compliance

Above 813.76 MHz Nil emission

Freq.(MHz) : Measurement frequency, Reading(dB μ V/m) : Indicated value for test receiver,

Table (Deg) : Directional degree of Turn table,

Antenna (Height, Pol, Fctr) : Antenna Height, Polarization and Factor

Cbl(dB) : Cable loss, Pre AMP(dB) : Preamplifier gain(dB)

Meas Result (dB μ V/m) : Reading(dB μ V/m) + Antenna factor.(dB/m) + CL(dB) - Pre AMP(dB)


Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB) : FCC Limit (dB μ V/m) – Meas Result(dB μ V/m)

5.2.7 Test plot

■ Fundamental frequency level



■ ≤30 MHz spectrum mask

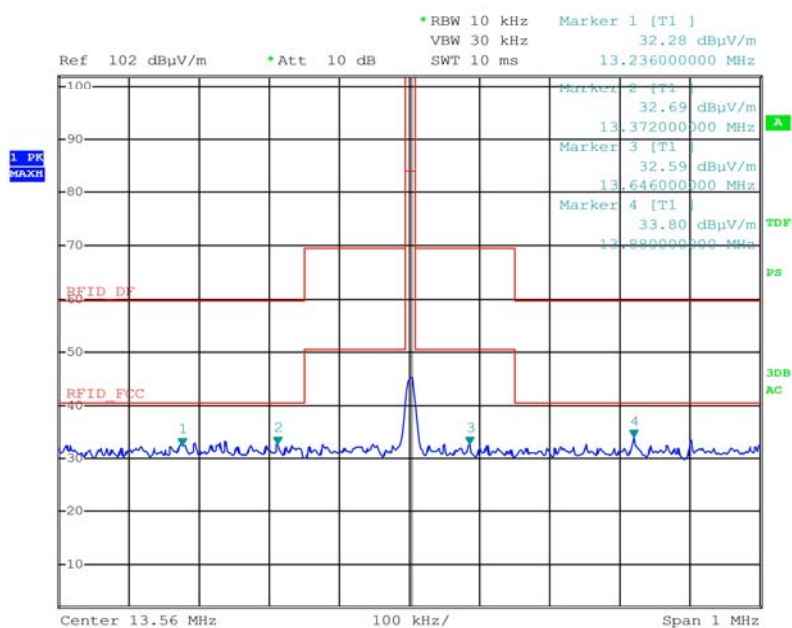

5.3 AC Power Conducted emissions

5.3.1 Standard Applicable [FCC §15.207(a)]

For intentional radiator that is designed to be connected to the public utility(AC)power line, the radio frequency. Voltage that is conducted back onto the AC power line on any frequencies hopping mode within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 uH/50 ohms line Impedance stabilization network(LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

§15.207 limits for AC line conducted emissions;

Frequency of Emission(MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency


5.3.2 Test Environment conditions

- Ambient temperature : 25 - 26 °C,
- Relative Humidity : (42 - 43) % R.H.

5.3.3 Measurement Procedure

EUT was placed on a non- metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the Maximum signal strength.

5.3.4 Test Setup Configuration

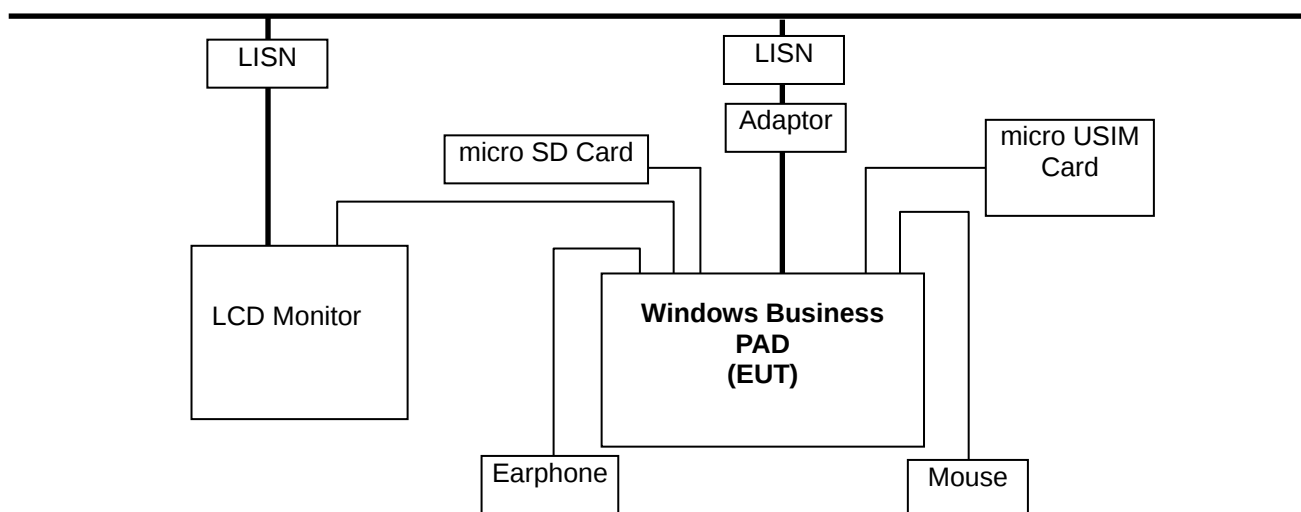

5.3.5 Used equipment

Equipment	Model No.	Serial No.	Manufacturer	Next cal date	Used
Test receiver	ESCS30	100111	R&S	2013.05.18	●
L.I.S.N.	ESH2-Z5	100044	R&S	2013.03.13	●
	ESH3-Z5	100147	R&S	2013.05.18	●

Measurement uncertainty : Conducted Emission measurement: ± 2.4 dB (K=2)

5.3.6 Measurement Result

< Class B >

Freq. [MHz]	Factor [dB]		POL	QP			AV		
	LISN	CABLE		Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Limit [dBuV]	Reading [dBuV]	Result [dBuV]
0.16	0.09	0.1	L	65.58	56.47	56.66	55.58	47.09	47.28
0.31	0.09	0.1	N	59.97	50.26	50.45	49.97	39.69	39.88
0.33	0.09	0.1	L	59.36	50.24	50.43	49.36	41.03	41.22
0.36	0.09	0.1	N	58.71	53.24	53.43	48.71	42.76	42.95
0.38	0.09	0.1	N	58.18	54.04	54.23	48.18	44.55	44.74
0.41	0.09	0.1	L	57.69	51.57	51.76	47.69	44.22	44.41
0.55	0.10	0.1	N	56.00	45.49	45.69	46.00	35.89	36.09
0.58	0.10	0.1	L	56.00	46.95	47.15	46.00	35.84	36.04
0.62	0.10	0.1	L	56.00	42.42	42.62	46.00	32.42	32.62
0.70	0.10	0.1	N	56.00	41.21	41.41	46.00	31.08	31.28
0.80	0.11	0.1	N	56.00	40.26	40.47	46.00	28.37	28.58
3.22	0.13	0.2	L	56.00	42.92	43.25	46.00	33.77	34.10
7.39	0.27	0.2	L	60.00	30.77	31.24	50.00	24.77	25.24
7.44	0.27	0.2	N	60.00	29.21	29.68	50.00	24.13	24.60
9.21	0.27	0.2	L	60.00	25.47	25.94	50.00	18.43	18.90
9.85	0.27	0.2	N	60.00	27.65	28.12	50.00	20.31	20.78
9.91	0.27	0.2	L	60.00	26.99	27.46	50.00	19.54	20.01
22.15	0.54	0.3	N	60.00	29.50	30.34	50.00	22.87	23.71

* LISN: LISN insertion Loss, Cable: Cable Loss

* Reading: test receiver reading value

* Result = LISN + Cable + Reading

5.3.7 Test Plot

Line. Live

Kostec Co., Ltd.

11 Jan 2013 09:48

Conducted Emission

EUT: BP80
 Manuf: BLUEBIRD
 Op Cond: AC 120 V / 60 Hz
 Operator: H.S.Jeong
 Test Spec: FCC
 Comment: Live


Result File: 0109_I.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150kHz	30MHz	3.9063kHz	9kHz	PK+AV	10msec	15 dB	OFF

Transducer	No.	Start	Stop	Name
	12	9kHz	30MHz	CNEFactor

Final Measurement: Detectors: X QP / + AV
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 50 dB

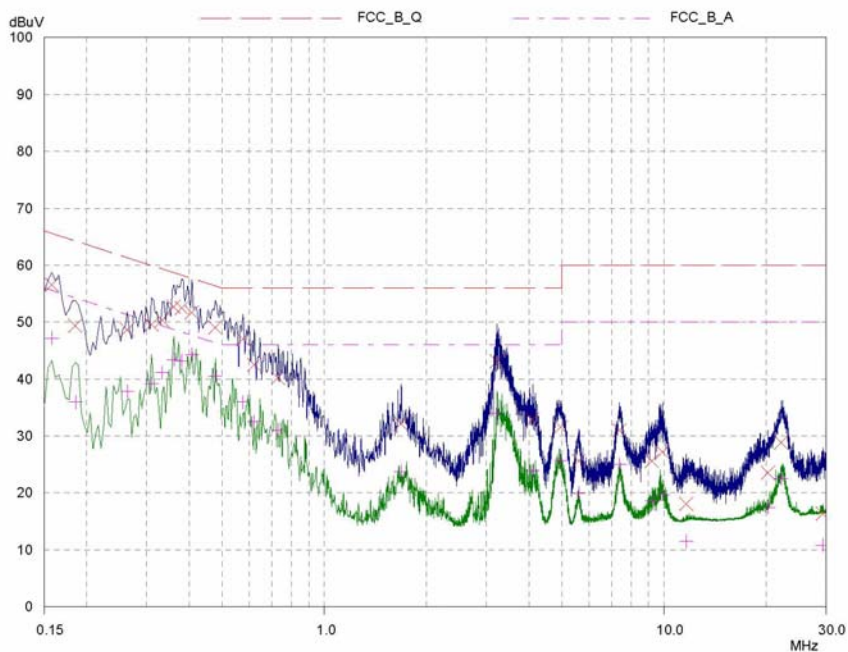

PAGE 1

Line. Neutral

Kostec Co., Ltd.

11 Jan 2013 09:38

Conducted Emission


EUT: BP80
 Manuf: BLUEBIRD
 Op Cond: AC 120 V / 60 Hz
 Operator: H.S.Jeong
 Test Spec: FCC
 Comment: Neutral

Result File: 0109_n.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	3.9063kHz	9kHz	PK+AV	10msec	15 dB	OFF	60dB	
Transducer	No.	Start	Stop	Name					
	12	9kHz	30MHz	CNEFactor					

Final Measurement: Detectors: X QP / + AV
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 50 dB

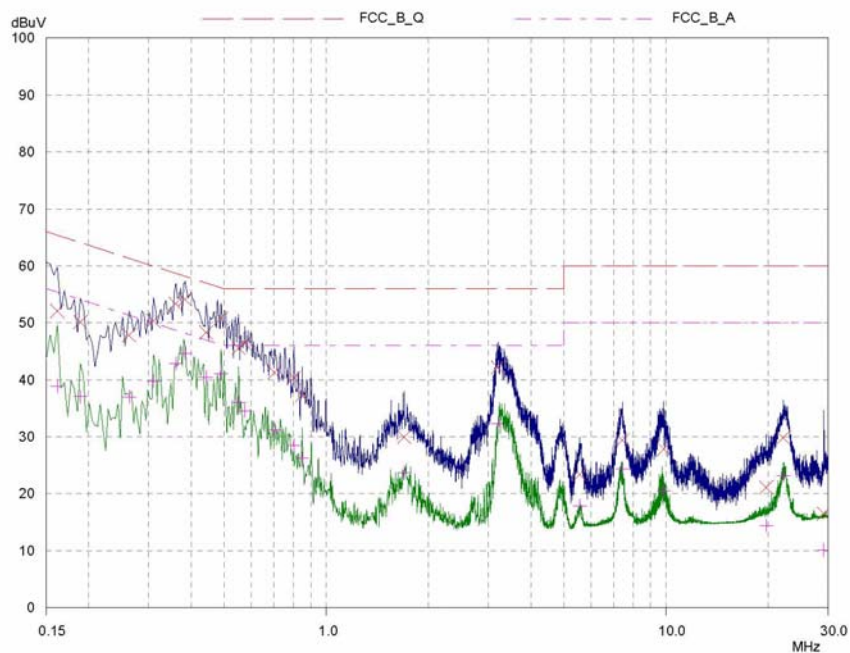

PAGE 1

5.4 Antenna requirement

5.4.1 Standard applicable [FCC §15.203]

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that user a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit So that broken antenna can be replaced by the user, but the Use of a standard antenna jack or electrical connector is prohibited.

The NFC antenna is located on one specific battery cover of Windows Business PAD and uses a unique coupling to the intentional radiator. So The Windows Business PAD FCC ID:RBF-BP80 Unit complies with the requirement of §15.203.

5.5 20 dB bandwidth measurement

5.5.1 Standard applicable [FCC §2.1049]

The 20 dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


5.5.2 Test Environment conditions

- Ambient temperature : 22 °C ,
- Relative Humidity : (58 - 60) % R.H.

5.5.3 Measurement Procedure

Before measurements are made the equipment shall have reached thermal balance in the Test chamber period. and then it is normal operating for about 15 minutes after thermal balance has been reached. For tests at the extreme temperature, the equipment shall be left in the test chamber until thermal balance is attained, then the standby or receive condition for a period of a few minute after which the equipment shall meet the specified requirements. The test data sheet recorded measured value by frequency counter.

5.5.4 Test setup

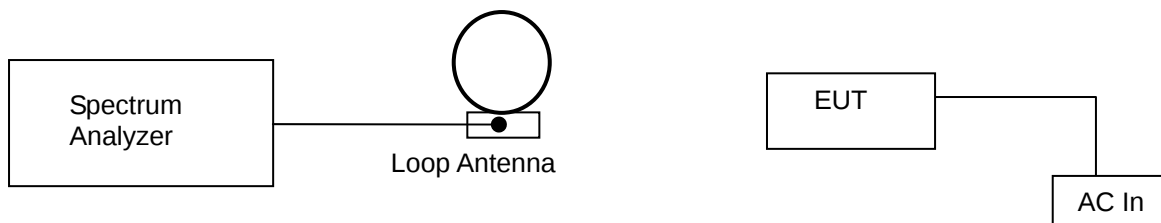

5.5.5 Measurement Result

Frequency	20 dB bandwidth
13.56 MHz	1.08 kHz

5.5.6 Test plot

