FCC RF Test Report

APPLICANT	:	Elo Touch Solutions, Inc.
EQUIPMENT	:	Handheld wireless data terminal
BRAND NAME	:	ELO or elo
MODEL NAME	:	EMC0550C
FCC ID	:	RBWEMC0550C
STANDARD	:	FCC Part 15 Subpart E §15.407
CLASSIFICATION	:	(NII) Unlicensed National Information Infrastructure

The product was received on Oct. 19, 2020 and testing was completed on Nov. 25, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager

ilac-MRA ACCREDITED Cert #5145.02

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**
SUMMARY OF TEST RESULT **4**
1 GENERAL DESCRIPTION **5**
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Modification of EUT 6
1.6 Testing Location 7
1.7 Test Software 7
1.8 Applicable Standards 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **8**
2.1 Carrier Frequency and Channel 8
2.2 Test Mode 9
2.3 Connection Diagram of Test System 10
2.4 Support Unit used in test configuration and system 10
2.5 EUT Operation Test Setup 11
2.6 Measurement Results Explanation Example 11
3 TEST RESULT **12**
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 12
3.2 Maximum Conducted Output Power Measurement 15
3.3 Power Spectral Density Measurement 16
3.4 Unwanted Emissions Measurement 19
3.5 AC Conducted Emission Measurement 23
3.6 Automatically Discontinue Transmission 25
3.7 Antenna Requirements 26
4 LIST OF MEASURING EQUIPMENT **27**
5 UNCERTAINTY OF EVALUATION **28**
APPENDIX A. CONDUCTED TEST RESULTS
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT
APPENDIX C. RADIATED SPURIOUS EMISSION
APPENDIX D. DUTY CYCLE PLOTS
APPENDIX E. SETUP PHOTOGRAPHS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR072709-01F	Rev. 01	Initial issue of report	Dec. 29, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) &15.209(a)	Pass	Under limit 8.06 dB at 54.250 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.80 dB at 0.679 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Elo Touch Solutions, Inc.
670 N. McCarthy Blvd. Suite 100, Milpitas, CA 95035, United States

1.2 Manufacturer

Elo Touch Solutions, Inc.
670 N. McCarthy Blvd. Suite 100, Milpitas, CA 95035, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Handheld wireless data terminal
Brand Name	ELO or elo
Model Name	EMC0550C
FCC ID	RBWEMC0550C
EUT supports Radios application	WCDMA/LTE/NFC/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT80+VHT80 Bluetooth BR/EDR/LE
IMEI Code	Conducted : N/A Conduction : 866834041596508 Radiation : 866834041613113
HW Version	A01
SW Version	5.0.120+p
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	**<SISO Ant.1>** **<5745 MHz ~ 5825 MHz>** 802.11a : 12.30 dBm / 0.0170 W **<SISO Ant.2>** **<5745 MHz ~ 5825 MHz>** 802.11a : 11.95 dBm / 0.0157 W **<MIMO Ant.1+2>** **<5745 MHz ~ 5825 MHz>** 802.11n HT20 : 15.02 dBm / 0.0318 W 802.11n HT40 : 13.99 dBm / 0.0251 W 802.11ac VHT20: 13.03 dBm / 0.0201 W 802.11ac VHT40: 12.89 dBm / 0.0195 W 802.11ac VHT80: 13.10 dBm / 0.0204 W
99% Occupied Bandwidth	**<SISO Ant.1>** 802.11a : 17.43 MHz **<SISO Ant.2>** 802.11a : 17.53 MHz **<MIMO Ant.1+2>** 802.11n HT20 : 18.68 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.52 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	<Ant. 1> : PIFA Antenna with gain 0.27 dBi <Ant. 2> : PIFA Antenna with gain 4.79 dBi Tx Beamforming gain: 5.83dBi
Antenna Function Description	<table><tr><td></td><td>Ant. 1</td><td>Ant. 2</td></tr><tr><td>802.11 a SISO</td><td>V</td><td>V</td></tr><tr><td>802.11 n/ac MIMO/Beamforming</td><td>V</td><td>V</td></tr></table>

Note:

1. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to their maximum conducted power.
2. 802.11n/ac supports Tx beamforming mode, the power/EIRP of TX BF mode is lower than non-Tx BF mode, so only non-Tx BF test data show in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Single Mode

Modulation	Data Rate
802.11a	6 Mbps

MIMO Mode

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + Adapter
Remark: For Radiated Test Cases, The tests were performance with Adapter	

Ch. #		Band IV：5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

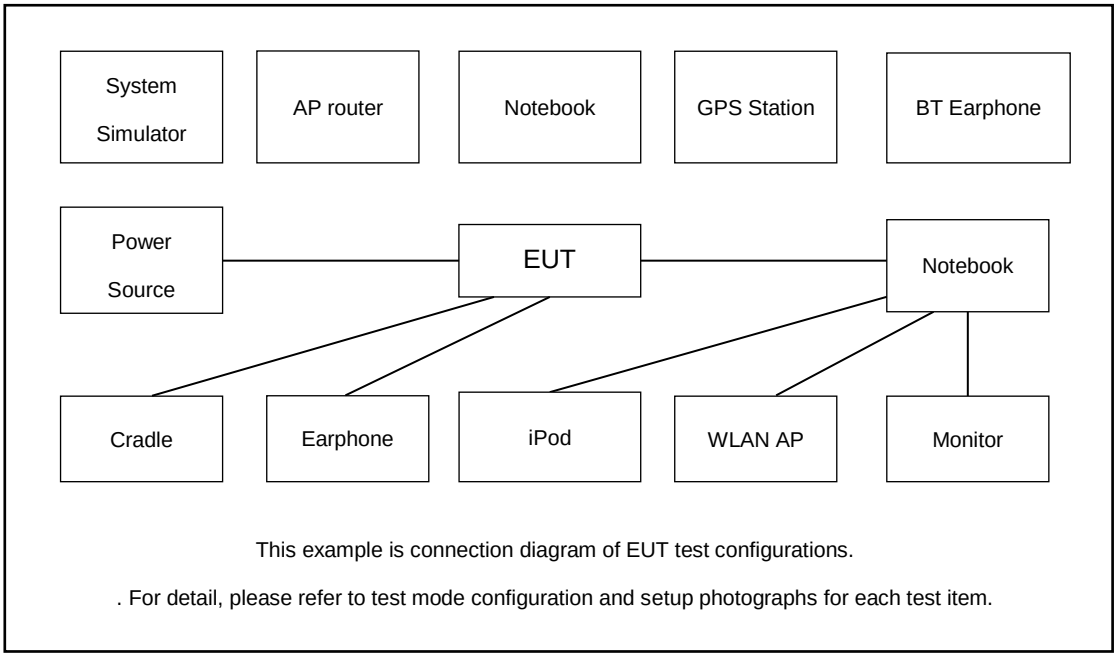

This example is connection diagram of EUT test configurations.

. For detail, please refer to test mode configuration and setup photographs for each test item.

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8 dB.

Offset(dB) = RF cable loss(dB).

= 8 (dB)

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW ≥ 3 x RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

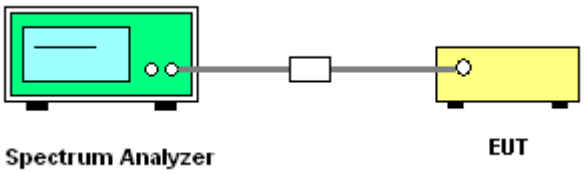

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

Minimum 6dB Bandwidth

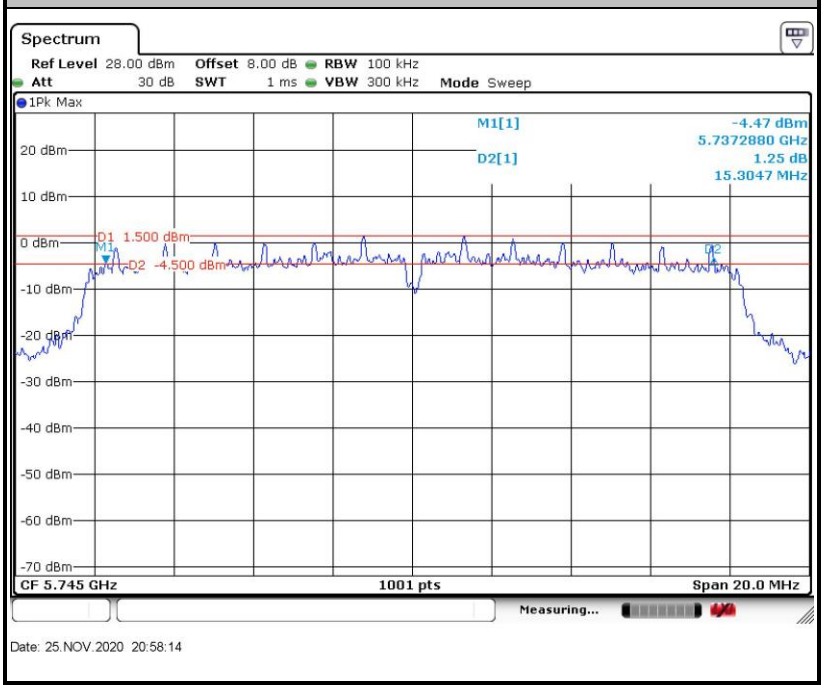

Maximum 26dB Bandwidth

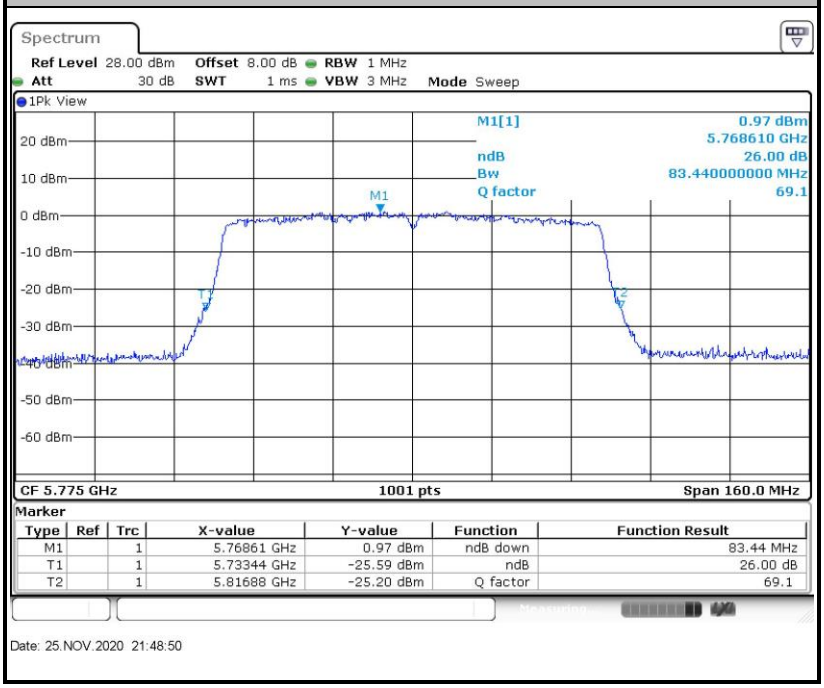

Maximum 99% Occupied Bandwidth

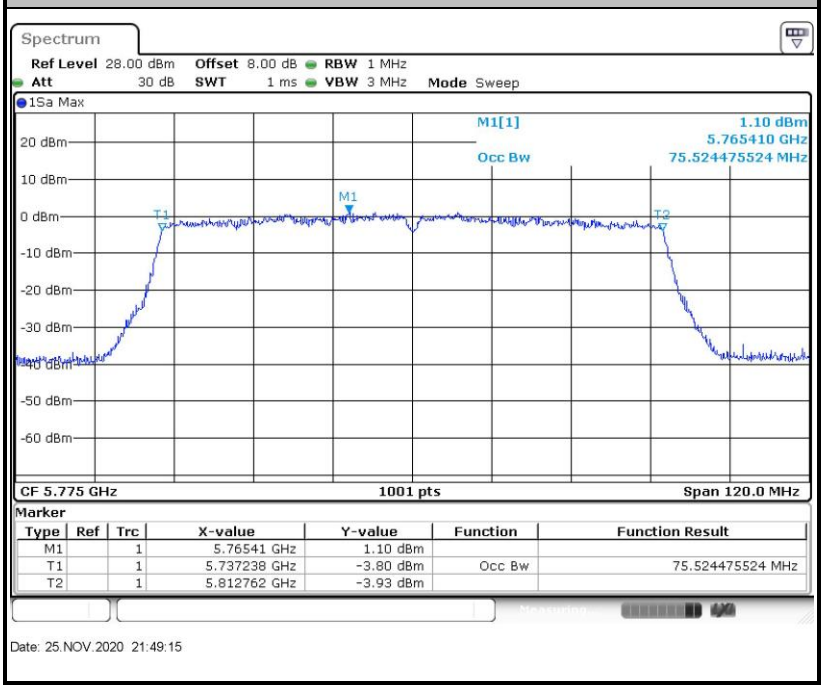

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, 10 log(1/x), where x is the duty cycle.

3.2.4 Test Setup

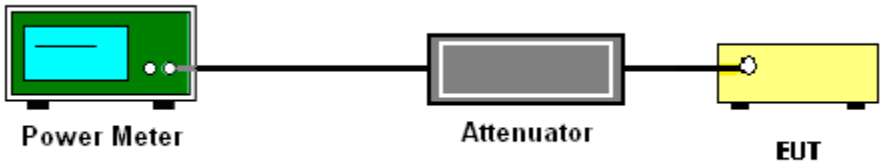

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW ≥ 1 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add 10 log(500kHz/RBW) to the test result.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

   Method (c): Measure and add 10 log(N_{ANT}) dB.

   With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity 10 log(N_{ANT}) dB is added to each spectrum value before comparing to the emission limit. The addition of 10 log(N_{ANT}) dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}$ th of the PSD limit.

3.3.4 Test Setup

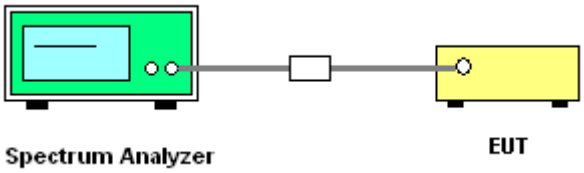

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

Worst Case Power Density (dBm/MHz)

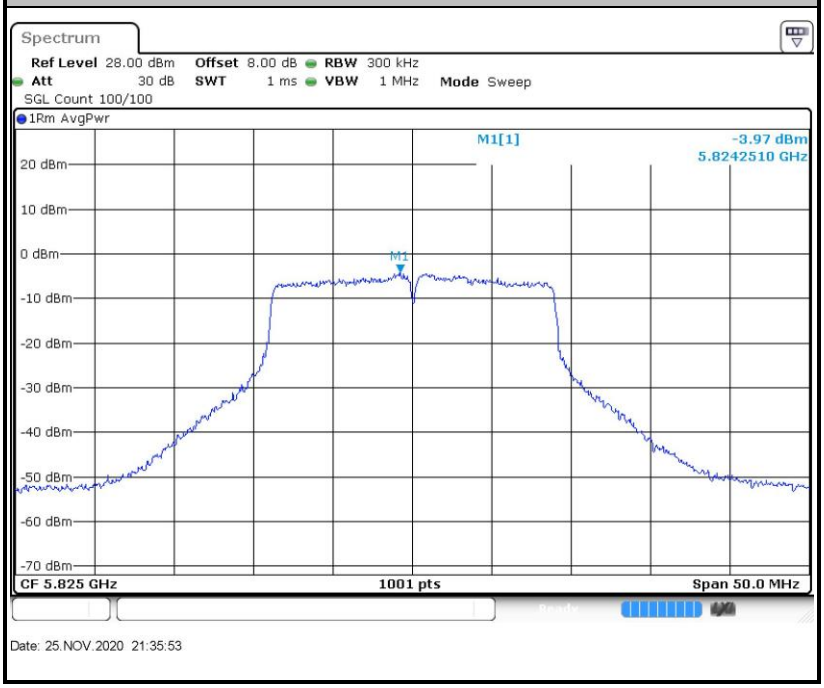

Note: Average Power Density (dB) = Measured value + Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log(d_{Meas}) - 104.8$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

   (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
   - RBW = 120 kHz
   - VBW = 300 kHz
   - Detector = Peak
   - Trace mode = max hold

   (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
   - RBW = 1 MHz
   - VBW ≥ 3 MHz
   - Detector = Peak
   - Sweep time = auto
   - Trace mode = max hold

   (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
   - RBW = 1 MHz
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup

For radiated emissions below 30MHz

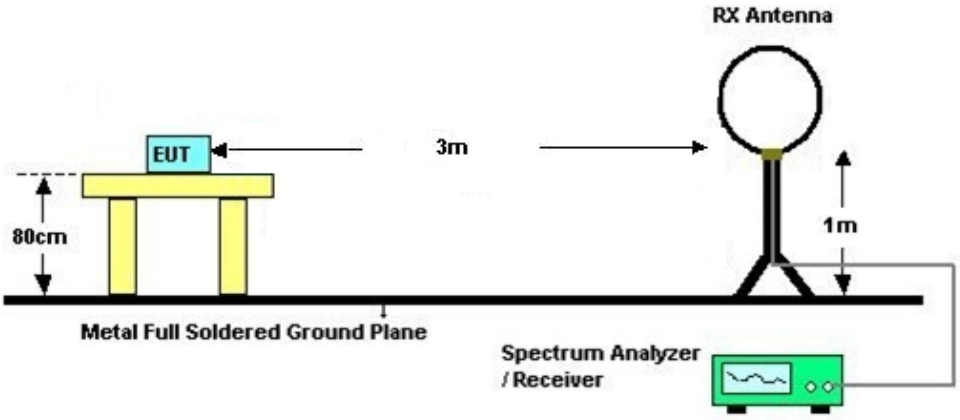

For radiated emissions from 30MHz to 1GHz

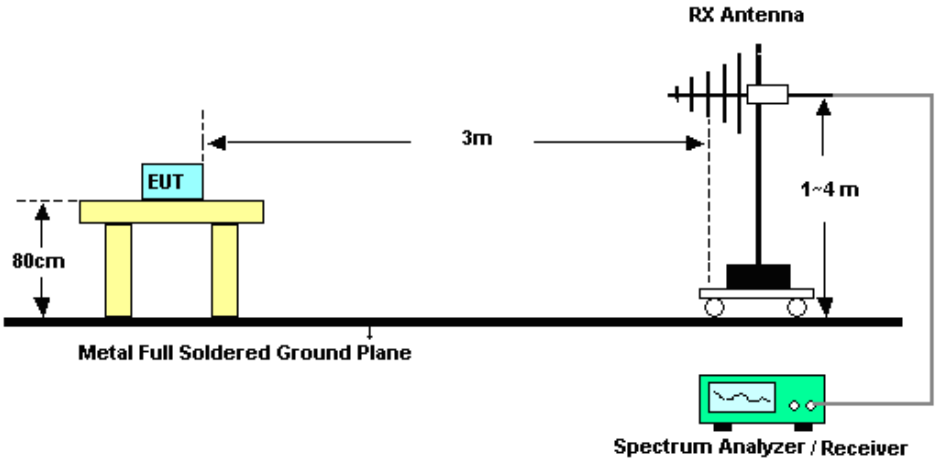

For radiated emissions above 1GHz

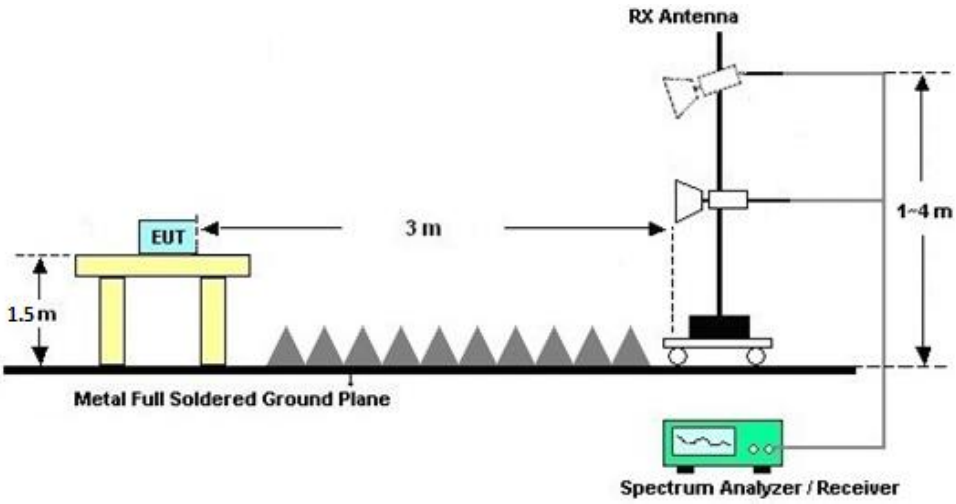

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

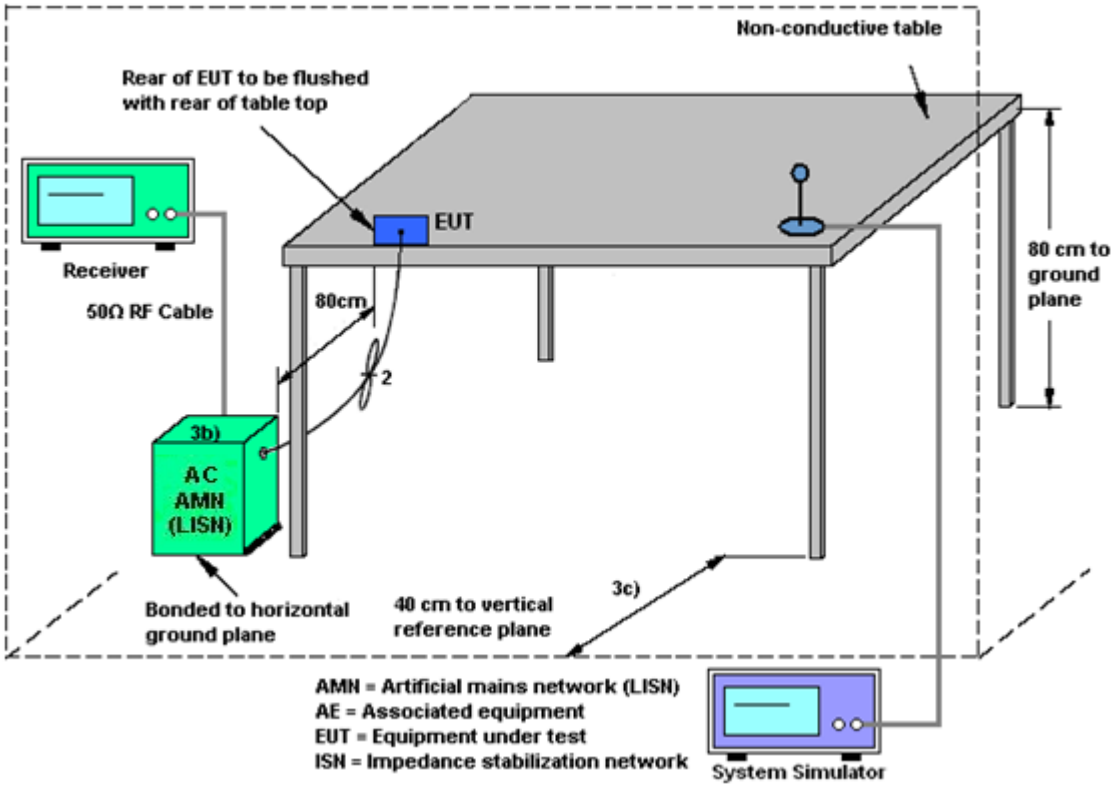

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

<CDD Modes>

	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band IV	0.27	4.79	4.79	5.83	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Nov. 25, 2020	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Nov. 25, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Nov. 25, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Nov. 24, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 15, 2020	Nov. 24, 2020	Apr. 14, 2021	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Nov. 24, 2020	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 30, 2020	Nov. 24, 2020	May 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Nov. 24, 2020	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jun. 05, 2020	Nov. 24, 2020	Jun. 04, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Apr. 14, 2020	Nov. 24, 2020	Apr. 13, 2021	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Nov. 24, 2020	Jan. 07, 2021	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz-18Ghz	Oct. 17, 2020	Nov. 24, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Nov. 24, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 24, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 24, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 24, 2020	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Nov. 05, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Nov. 05, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 17, 2020	Nov. 05, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Nov. 05, 2020	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**2.9dB**

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**5.0dB**

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**5.0dB**

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**5.0dB**

Appendix A. Conducted Test Results

Report Number : FR072709-01F

Test Engineer:	Andy Song	Temperature:	21~25	°C
Test Date:	2020/11/25	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	14.48	17.53	23.88	24.08	15.48	15.30	0.5	0.5	Pass
11a	6Mbps	1	157	5785	17.43	17.48	24.08	23.13	15.64	15.50	0.5	0.5	Pass
11a	6Mbps	1	165	5825	17.43	17.43	23.43	23.23	15.50	15.52	0.5	0.5	Pass
HT20	MCS0	2	149	5745	18.68	18.58	24.88	25.13	15.68	15.96	0.5		Pass
HT20	MCS0	2	157	5785	18.68	18.68	25.08	25.13	15.96	16.14	0.5		Pass
HT20	MCS0	2	165	5825	18.63	18.58	24.63	24.38	15.94	15.96	0.5		Pass
HT40	MCS0	2	151	5755	36.46	36.56	41.72	41.81	35.28	35.28	0.5		Pass
HT40	MCS0	2	159	5795	36.46	36.56	41.63	41.81	35.36	35.12	0.5		Pass
VHT80	MCS0	2	155	5775	75.52	75.52	83.44	83.28	75.05	75.05	0.5		Pass

Report Number : FR072709-01F

TEST RESULTS DATA
Average Power Table

Band IV															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	0.08	0.08	11.89	11.95		30.00	30.00	0.27	4.79		Pass
11a	6Mbps	1	157	5785	0.08	0.08	12.11	11.80		30.00	30.00	0.27	4.79		Pass
11a	6Mbps	1	165	5825	0.08	0.08	12.30	11.77		30.00	30.00	0.27	4.79		Pass
HT20	MCS0	2	149	5745	0.17	0.05	11.89	11.80	14.85	30.00		4.79			Pass
HT20	MCS0	2	157	5785	0.17	0.05	12.02	12.00	15.02	30.00		4.79			Pass
HT20	MCS0	2	165	5825	0.17	0.05	11.88	12.11	15.01	30.00		4.79			Pass
HT40	MCS0	2	151	5755	0.16	0.16	10.75	11.20	13.99	30.00		4.79			Pass
HT40	MCS0	2	159	5795	0.16	0.16	10.84	11.04	13.95	30.00		4.79			Pass
VHT20	MCS0	2	149	5745	0.13	0.06	9.80	10.22	13.03	30.00		4.79			Pass
VHT20	MCS0	2	157	5785	0.13	0.06	9.75	9.95	12.87	30.00		4.79			Pass
VHT20	MCS0	2	165	5825	0.13	0.06	9.72	10.13	12.94	30.00		4.79			Pass
VHT40	MCS0	2	151	5755	0.16	0.16	9.74	10.00	12.89	30.00		4.79			Pass
VHT40	MCS0	2	159	5795	0.16	0.16	9.84	9.92	12.89	30.00		4.79			Pass
VHT80	MCS0	2	155	5775	0.30	0.30	9.91	10.25	13.10	30.00		4.79			Pass

Report Number : FR072709-01F

TEST RESULTS DATA
Power Spectral Density

Band IV																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.08	0.08	2.22	2.22	-2.16	-2.23		30.00	30.00	0.27	4.79	Pass
11a	6Mbps	1	157	5785	0.08	0.08	2.22	2.22	-1.74	-2.17		30.00	30.00	0.27	4.79	Pass
11a	6Mbps	1	165	5825	0.08	0.08	2.22	2.22	-1.81	-2.14		30.00	30.00	0.27	4.79	Pass
HT20	MCS0	2	149	5745	0.17	0.05	2.22				0.50	30.00		5.83		Pass
HT20	MCS0	2	157	5785	0.17	0.05	2.22				1.21	30.00		5.83		Pass
HT20	MCS0	2	165	5825	0.17	0.05	2.22				1.31	30.00		5.83		Pass
HT40	MCS0	2	151	5755	0.16	0.16	2.22				-3.11	30.00		5.83		Pass
HT40	MCS0	2	159	5795	0.16	0.16	2.22				-3.24	30.00		5.83		Pass
VHT80	MCS0	2	155	5775	0.30	0.30	2.22				-6.69	30.00		5.83		Pass

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	**Temperature :**	25.3~25.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	**Phase :**	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

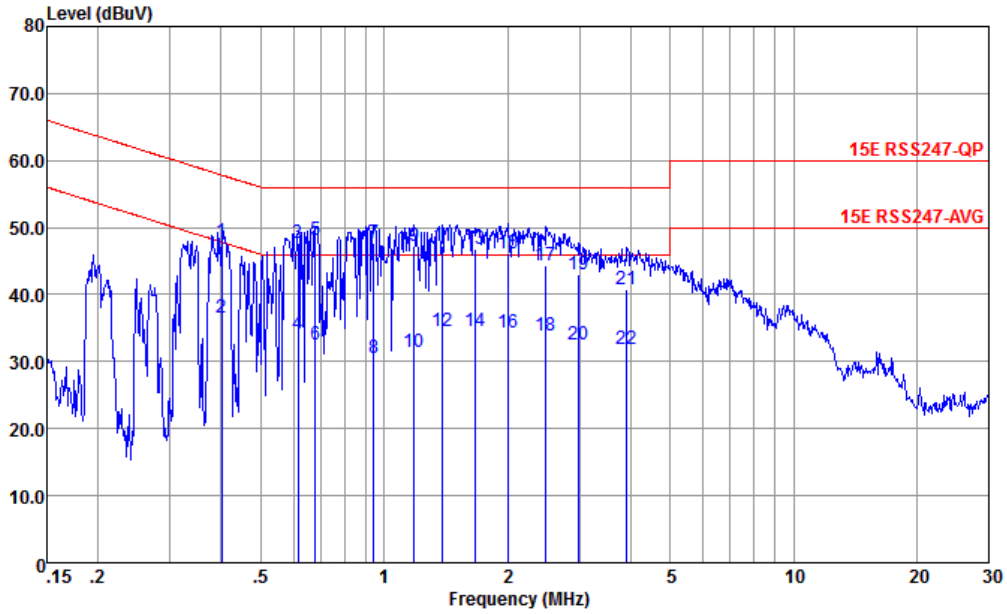

Site : CO01-KS
Condition : 15E RSS247-QP TWO-LISN-CN02-L LINE

		Freq MHz	Level dBuV	Over Limit dB	Limit Line dBuV	Read Level dBuV	LISN Factor dB	Cable Loss dB	Remark
1		0.402	48.01	-9.80	57.81	28.09	9.65	10.27	QP
2		0.402	36.51	-21.30	57.81	16.59	9.65	10.27	Average
3		0.617	47.79	-8.21	56.00	27.89	9.66	10.24	QP
4		0.617	34.19	-21.81	56.00	14.29	9.66	10.24	Average
5	*	0.679	48.20	-7.80	56.00	28.30	9.66	10.24	QP
6		0.679	32.50	-23.50	56.00	12.60	9.66	10.24	Average
7		0.943	47.74	-8.26	56.00	27.80	9.70	10.24	QP
8		0.943	30.54	-25.46	56.00	10.60	9.70	10.24	Average
9		1.184	47.20	-8.80	56.00	27.20	9.77	10.23	QP
10		1.184	31.50	-24.50	56.00	11.50	9.77	10.23	Average
11		1.388	47.35	-8.65	56.00	27.30	9.82	10.23	QP
12		1.388	34.55	-21.45	56.00	14.50	9.82	10.23	Average
13		1.662	46.70	-9.30	56.00	26.60	9.87	10.23	QP
14		1.662	34.60	-21.40	56.00	14.50	9.87	10.23	Average
15		2.012	46.07	-9.93	56.00	25.90	9.94	10.23	QP
16		2.012	34.37	-21.63	56.00	14.20	9.94	10.23	Average
17		2.487	44.44	-11.56	56.00	24.21	10.00	10.23	QP
18		2.487	33.87	-22.13	56.00	13.64	10.00	10.23	Average
19		2.993	42.90	-13.10	56.00	22.60	10.06	10.24	QP
20		2.993	32.50	-23.50	56.00	12.20	10.06	10.24	Average
21		3.922	40.71	-15.29	56.00	20.30	10.16	10.25	QP
22		3.922	31.91	-24.09	56.00	11.50	10.16	10.25	Average

Test Engineer :	Amos Zhang	**Temperature :**	25.3~25.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	**Phase :**	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

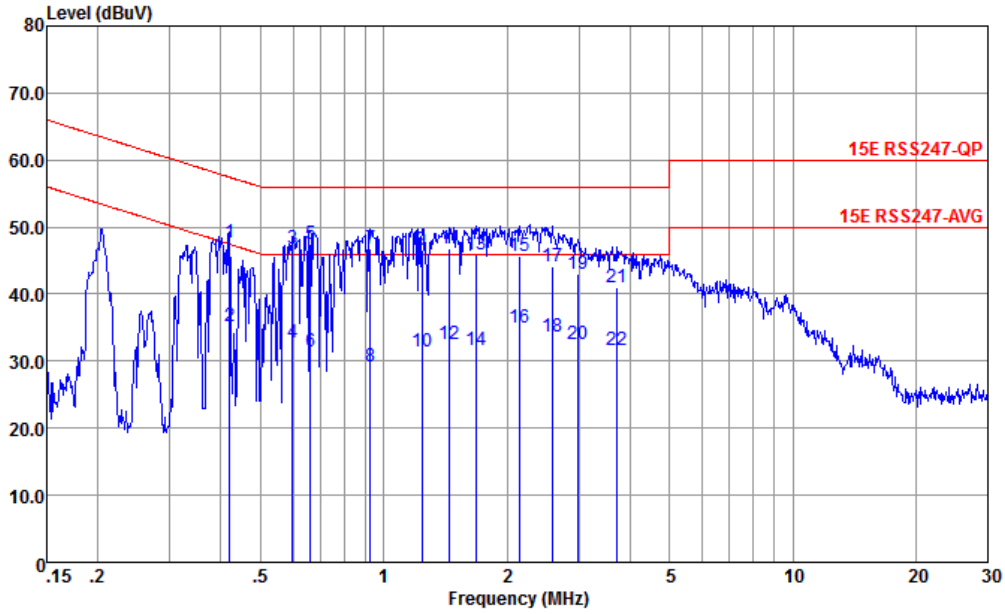

Site : CO01-KS
Condition : 15E RSS247-QP TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.419	47.61	-9.85	57.46	27.60	9.75	10.26	QP
2	0.419	35.31	-22.15	57.46	15.30	9.75	10.26	Average
3	0.598	46.76	-9.24	56.00	26.79	9.73	10.24	QP
4	0.598	32.76	-23.24	56.00	12.79	9.73	10.24	Average
5 *	0.661	47.46	-8.54	56.00	27.49	9.73	10.24	QP
6	0.661	31.46	-24.54	56.00	11.49	9.73	10.24	Average
7	0.928	46.85	-9.15	56.00	26.90	9.71	10.24	QP
8	0.928	29.15	-26.85	56.00	9.20	9.71	10.24	Average
9	1.242	46.61	-9.39	56.00	26.60	9.78	10.23	QP
10	1.242	31.51	-24.49	56.00	11.50	9.78	10.23	Average
11	1.449	46.85	-9.15	56.00	26.80	9.82	10.23	QP
12	1.449	32.55	-23.45	56.00	12.50	9.82	10.23	Average
13	1.680	46.00	-10.00	56.00	25.90	9.87	10.23	QP
14	1.680	31.70	-24.30	56.00	11.60	9.87	10.23	Average
15	2.155	45.78	-10.22	56.00	25.60	9.95	10.23	QP
16	2.155	34.98	-21.02	56.00	14.80	9.95	10.23	Average
17	2.581	44.16	-11.84	56.00	23.90	10.02	10.24	QP
18	2.581	33.56	-22.44	56.00	13.30	10.02	10.24	Average
19	2.993	43.11	-12.89	56.00	22.80	10.07	10.24	QP
20	2.993	32.61	-23.39	56.00	12.30	10.07	10.24	Average
21	3.700	41.00	-15.00	56.00	20.60	10.15	10.25	QP
22	3.700	31.60	-24.40	56.00	11.20	10.15	10.25	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a Ant1 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5639.2	55.97	-12.33	68.3	40.27	34.81	11.66	30.77	100	130	P	H
		5655.6	55.96	-16.5	72.46	40.2	34.86	11.68	30.78	100	130	P	H
		5711.6	55.37	-53.18	108.55	39.42	35.03	11.73	30.81	100	130	P	H
		5724.8	55.51	-66.33	121.84	39.5	35.08	11.75	30.82	100	130	P	H
		5746	93	-	-	76.93	35.14	11.76	30.83	100	130	P	H
		5746	86.37	-	-	70.3	35.14	11.76	30.83	100	130	A	H
		5607.2	56.2	-12.1	68.3	40.63	34.7	11.63	30.76	114	247	P	V
		5682.4	57.27	-35.04	92.31	41.44	34.92	11.7	30.79	114	247	P	V
		5710	56.84	-51.26	108.1	40.89	35.03	11.73	30.81	114	247	P	V
		5721.2	56.16	-57.48	113.64	40.14	35.08	11.75	30.81	114	247	P	V
		5740	96.97	-	-	80.89	35.14	11.76	30.82	114	247	P	V
		5740	90.23	-	-	74.15	35.14	11.76	30.82	114	247	A	V
802.11a CH 165 5825MHz		5854	55.16	-58.02	113.18	38.78	35.37	11.88	30.87	116	245	P	H
		5861.6	56.11	-52.94	109.05	39.74	35.37	11.88	30.88	116	245	P	H
		5905.2	56.66	-26.25	82.91	40.2	35.42	11.93	30.89	116	245	P	H
		5930.8	56.32	-11.98	68.3	39.86	35.43	11.94	30.91	116	245	P	H
		5824	93.93	-	-	77.62	35.33	11.84	30.86	116	245	P	H
		5824	87.29	-	-	70.98	35.33	11.84	30.86	116	245	A	H
		5854	55.91	-57.27	113.18	39.53	35.37	11.88	30.87	110	247	P	V
		5858	56.66	-53.4	110.06	40.29	35.37	11.88	30.88	110	247	P	V
		5918.8	56.92	-15.95	72.87	40.47	35.42	11.93	30.9	110	247	P	V
		5942.8	58.09	-10.21	68.3	41.59	35.45	11.96	30.91	110	247	P	V
		5824	98.44	-	-	82.13	35.33	11.84	30.86	110	247	P	V
		5824	91.5	-	-	75.19	35.33	11.84	30.86	110	247	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11a Ant1 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	44.24	-29.76	74	49.4	38.19	17.08	60.43	100	360	P	H
		11490	44.17	-29.83	74	49.33	38.19	17.08	60.43	100	360	P	V
802.11a CH 157 5785MHz		11570	43.66	-30.34	74	48.59	38.3	17.15	60.38	100	360	P	H
		11570	43.95	-30.05	74	48.88	38.3	17.15	60.38	100	360	P	V
802.11a CH 165 5825MHz		11650	43.82	-30.18	74	48.56	38.39	17.2	60.33	100	360	P	H
		11650	44.21	-29.79	74	48.95	38.39	17.2	60.33	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI 802.11a Ant 2(Band Edge @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		5646.4	55.91	-12.39	68.3	40.22	34.81	11.66	30.78	118	3	P	H
		5696.4	56.01	-46.64	102.65	40.13	34.97	11.71	30.8	118	3	P	H
		5707.6	56.05	-51.38	107.43	40.1	35.03	11.73	30.81	118	3	P	H
		5724.8	60.91	-60.93	121.84	44.9	35.08	11.75	30.82	118	3	P	H
		5746	99.16	-	-	83.09	35.14	11.76	30.83	118	3	P	H
		5746	92.89	-	-	76.82	35.14	11.76	30.83	118	3	A	H
		5602.4	56.38	-11.92	68.3	40.81	34.7	11.63	30.76	100	294	P	V
		5668	55.65	-26.01	81.66	39.82	34.92	11.7	30.79	100	294	P	V
		5703.6	56.49	-49.82	106.31	40.54	35.03	11.73	30.81	100	294	P	V
		5724.4	57.51	-63.42	120.93	41.5	35.08	11.75	30.82	100	294	P	V
		5746	96.88	-	-	80.81	35.14	11.76	30.83	100	294	P	V
		5746	90.55	-	-	74.48	35.14	11.76	30.83	100	294	A	V
802.11a CH 165 5825MHz		5851.2	55.66	-63.9	119.56	39.32	35.35	11.86	30.87	100	23	P	H
		5873.2	56.45	-49.35	105.8	40.06	35.38	11.89	30.88	100	23	P	H
		5884.4	56.95	-41.37	98.32	40.57	35.38	11.89	30.89	100	23	P	H
		5995.6	56.88	-11.42	68.3	40.3	35.5	12.01	30.93	100	23	P	H
		5824	98.32	-	-	82.01	35.33	11.84	30.86	100	23	P	H
		5824	92.32	-	-	76.01	35.33	11.84	30.86	100	23	A	H
		5853.2	56.31	-58.69	115	39.97	35.35	11.86	30.87	103	309	P	V
		5858	57.09	-52.97	110.06	40.72	35.37	11.88	30.88	103	309	P	V
		5892.8	57.46	-34.63	92.09	41.04	35.4	11.91	30.89	103	309	P	V
		5932.8	56.85	-11.45	68.3	40.39	35.43	11.94	30.91	103	309	P	V
		5824	97.94	-	-	81.63	35.33	11.84	30.86	103	309	P	V
		5824	91.61	-	-	75.3	35.33	11.84	30.86	103	309	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11a Ant2 (Harmonic @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	44.51	-29.49	74	49.67	38.19	17.08	60.43	100	360	P	H
		11490	44.51	-29.49	74	49.67	38.19	17.08	60.43	100	360	P	V
802.11a CH 157 5785MHz		11570	44.77	-29.23	74	49.7	38.3	17.15	60.38	100	360	P	H
		11570	45.58	-28.42	74	50.51	38.3	17.15	60.38	100	360	P	V
802.11a CH 165 5825MHz		11650	45.05	-28.95	74	49.79	38.39	17.2	60.33	100	360	P	H
		11650	44.84	-29.16	74	49.58	38.39	17.2	60.33	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11n HT20 Ant1+2 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5612	55.73	-12.57	68.3	40.17	34.7	11.63	30.77	100	242	P	H
		5699.6	55.86	-49.15	105.01	39.98	34.97	11.71	30.8	100	242	P	H
		5718.8	57.01	-53.55	110.56	40.99	35.08	11.75	30.81	100	242	P	H
		5724.8	57.03	-64.81	121.84	41.02	35.08	11.75	30.82	100	242	P	H
		5746	100.38	-	-	84.31	35.14	11.76	30.83	100	242	P	H
		5746	93.44	-	-	77.37	35.14	11.76	30.83	100	242	A	H
		5641.2	56.02	-12.28	68.3	40.32	34.81	11.66	30.77	116	286	P	V
		5699.5	56.69	-48.24	104.93	40.81	34.97	11.71	30.8	116	286	P	V
		5701	56.4	-49.18	105.58	40.44	35.03	11.73	30.8	116	286	P	V
		5722.8	58.65	-58.63	117.28	42.64	35.08	11.75	30.82	116	286	P	V
		5746	101.99	-	-	85.92	35.14	11.76	30.83	116	286	P	V
		5746	94.8	-	-	78.73	35.14	11.76	30.83	116	286	A	V
802.11n HT20 CH 165 5825MHz		5853.2	56.22	-58.78	115	39.88	35.35	11.86	30.87	101	243	P	H
		5867.6	56.25	-51.12	107.37	39.88	35.37	11.88	30.88	101	243	P	H
		5876.8	56.57	-47.39	103.96	40.19	35.38	11.89	30.89	101	243	P	H
		5970.4	56.72	-11.58	68.3	40.19	35.47	11.98	30.92	101	243	P	H
		5824	99.72	-	-	83.41	35.33	11.84	30.86	101	243	P	H
		5824	93.36	-	-	77.05	35.33	11.84	30.86	101	243	A	H
		5850.4	57.54	-63.85	121.39	41.2	35.35	11.86	30.87	100	284	P	V
		5858.8	56.82	-53.01	109.83	40.45	35.37	11.88	30.88	100	284	P	V
		5888	56.32	-39.33	95.65	39.9	35.4	11.91	30.89	100	284	P	V
		5961.6	57	-11.3	68.3	40.46	35.47	11.98	30.91	100	284	P	V
		5824	102.05	-	-	85.74	35.33	11.84	30.86	100	284	P	V
		5824	95.29	-	-	78.98	35.33	11.84	30.86	100	284	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11n HT20 Ant1+2 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	44.89	-29.11	74	50.05	38.19	17.08	60.43	100	360	P	H
		11490	44.72	-29.28	74	49.88	38.19	17.08	60.43	100	360	P	V
802.11n HT20 CH 157 5785MHz		11570	44.83	-29.17	74	49.76	38.3	17.15	60.38	100	360	P	H
		11570	45.41	-28.59	74	50.34	38.3	17.15	60.38	100	360	P	V
802.11n HT20 CH 165 5825MHz		11650	44.3	-29.7	74	49.04	38.39	17.2	60.33	100	360	P	H
		11650	45.16	-28.84	74	49.9	38.39	17.2	60.33	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11n HT40 Ant1+2 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5634	57.59	-10.71	68.3	41.89	34.81	11.66	30.77	100	246	P	H
		5662	56.32	-20.89	77.21	40.56	34.86	11.68	30.78	100	246	P	H
		5719.8	62.46	-48.38	110.84	46.44	35.08	11.75	30.81	100	246	P	H
		5720.2	62.46	-48.9	111.36	46.44	35.08	11.75	30.81	100	246	P	H
		5853.6	54.37	-59.72	114.09	37.99	35.37	11.88	30.87	100	246	P	H
		5869.2	55.26	-51.66	106.92	38.89	35.37	11.88	30.88	100	246	P	H
		5886.8	56.95	-39.59	96.54	40.57	35.38	11.89	30.89	100	246	P	H
		5963.2	56.79	-11.51	68.3	40.25	35.47	11.98	30.91	100	246	P	H
		5752	97.73	-	-	81.59	35.19	11.78	30.83	100	246	P	H
		5752	91.4	-	-	75.26	35.19	11.78	30.83	100	246	A	H
		5616.4	56.26	-12.04	68.3	40.63	34.75	11.65	30.77	100	285	P	V
		5656	56.44	-16.32	72.76	40.68	34.86	11.68	30.78	100	285	P	V
		5718.4	63.86	-46.59	110.45	47.84	35.08	11.75	30.81	100	285	P	V
		5720.4	64.25	-47.56	111.81	48.23	35.08	11.75	30.81	100	285	P	V
		5852.4	57.34	-59.49	116.83	41	35.35	11.86	30.87	100	285	P	V
		5874	56.71	-48.87	105.58	40.33	35.38	11.89	30.89	100	285	P	V
		5891.6	56.03	-36.95	92.98	39.61	35.4	11.91	30.89	100	285	P	V
		5973.2	57.03	-11.27	68.3	40.48	35.48	11.99	30.92	100	285	P	V
		5758	99.82	-	-	83.68	35.19	11.78	30.83	100	285	P	V
		5758	93.39	-	-	77.25	35.19	11.78	30.83	100	285	A	V

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5647.2	56.32	-11.98	68.3	40.63	34.81	11.66	30.78	104	244	P	H
		5686.4	56.19	-39.08	95.27	40.31	34.97	11.71	30.8	104	244	P	H
		5716.8	56.21	-53.8	110.01	40.26	35.03	11.73	30.81	104	244	P	H
		5722.8	56.04	-61.24	117.28	40.03	35.08	11.75	30.82	104	244	P	H
		5854.8	55.8	-55.56	111.36	39.43	35.37	11.88	30.88	104	244	P	H
		5871.6	55.86	-50.39	106.25	39.47	35.38	11.89	30.88	104	244	P	H
		5914.8	55.86	-19.96	75.82	39.41	35.42	11.93	30.9	104	244	P	H
		5998.8	56.8	-11.5	68.3	40.22	35.5	12.01	30.93	104	244	P	H
802.11n		5794	98.54	-	-	82.27	35.3	11.81	30.84	104	244	P	H
HT40		5794	91.48	-	-	75.21	35.3	11.81	30.84	104	244	A	H
CH 159		5643.2	55.93	-12.37	68.3	40.23	34.81	11.66	30.77	100	285	P	V
5795MHz		5671.6	56.02	-28.3	84.32	40.19	34.92	11.7	30.79	100	285	P	V
		5714.4	57.28	-52.05	109.33	41.33	35.03	11.73	30.81	100	285	P	V
		5724.8	55.69	-66.15	121.84	39.68	35.08	11.75	30.82	100	285	P	V
		5851.2	54.81	-64.75	119.56	38.47	35.35	11.86	30.87	100	285	P	V
		5863.6	57.07	-51.42	108.49	40.7	35.37	11.88	30.88	100	285	P	V
		5888	55.92	-39.73	95.65	39.5	35.4	11.91	30.89	100	285	P	V
		5936.4	57.05	-11.25	68.3	40.59	35.43	11.94	30.91	100	285	P	V
		5800	100.71	-	-	84.45	35.3	11.81	30.85	100	285	P	V
		5800	93.35	-	-	77.09	35.3	11.81	30.85	100	285	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11n HT40 Ant1+2 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	43.46	-30.54	74	48.59	38.2	17.1	60.43	100	360	P	H
		11510	44.94	-29.06	74	50.07	38.2	17.1	60.43	100	360	P	V
802.11n HT40 CH 159 5795MHz		11590	44.49	-29.51	74	49.38	38.32	17.16	60.37	100	360	P	H
		11590	45.56	-28.44	74	50.45	38.32	17.16	60.37	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11ac VHT80 Ant1+2 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5606.8	56.75	-11.55	68.3	41.18	34.7	11.63	30.76	100	245	P	H
		5695.6	60.1	-41.96	102.06	44.22	34.97	11.71	30.8	100	245	P	H
		5713.6	61.29	-47.82	109.11	45.34	35.03	11.73	30.81	100	245	P	H
		5720	60.07	-50.83	110.9	44.05	35.08	11.75	30.81	100	245	P	H
		5850.4	57.43	-63.96	121.39	41.09	35.35	11.86	30.87	100	245	P	H
		5860.8	57.56	-51.71	109.27	41.19	35.37	11.88	30.88	100	245	P	H
		5896.4	56.27	-33.16	89.43	39.85	35.4	11.91	30.89	100	245	P	H
		5926.8	57.66	-10.64	68.3	41.19	35.43	11.94	30.9	100	245	P	H
		5758	94.6	-	-	78.46	35.19	11.78	30.83	100	245	P	H
		5758	87.49	-	-	71.35	35.19	11.78	30.83	100	245	A	H
		5623.2	55.43	-12.87	68.3	39.8	34.75	11.65	30.77	100	286	P	V
		5696.8	59.32	-43.62	102.94	43.44	34.97	11.71	30.8	100	286	P	V
		5718.8	63.6	-46.96	110.56	47.58	35.08	11.75	30.81	100	286	P	V
		5722	61.67	-53.79	115.46	45.66	35.08	11.75	30.82	100	286	P	V
		5852.4	56.87	-59.96	116.83	40.53	35.35	11.86	30.87	100	286	P	V
		5856	57.42	-53.2	110.62	41.05	35.37	11.88	30.88	100	286	P	V
		5878	57.52	-45.55	103.07	41.14	35.38	11.89	30.89	100	286	P	V
		5932	57.15	-11.15	68.3	40.69	35.43	11.94	30.91	100	286	P	V
		5758	96.07	-	-	79.93	35.19	11.78	30.83	100	286	P	V
		5758	88.71	-	-	72.57	35.19	11.78	30.83	100	286	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11ac VHT80 Ant1+2 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	44.69	-29.31	74	49.68	38.27	17.13	60.39	300	0	P	H
		11550	44.39	-29.61	74	49.38	38.27	17.13	60.39	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

WIFI 802.11a Ant1 (LF @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a LF		30	19.53	-20.47	40	26.82	25.1	0.71	33.1	-	-	P	H
		123.12	23.21	-20.29	43.5	36.99	17.6	1.67	33.05	-	-	P	H
		200.72	26.89	-16.61	43.5	42.52	15.11	2.16	32.9	100	0	P	H
		256.98	23.3	-22.7	46	33.65	19.99	2.45	32.79	-	-	P	H
		653.71	25.12	-20.88	46	27.29	26.52	3.9	32.59	-	-	P	H
		938.89	27.37	-18.63	46	24.22	30.59	4.68	32.12	-	-	P	H
		32.91	30.86	-9.14	40	39.63	23.51	0.76	33.04	-	-	P	V
		54.25	31.94	-8.06	40	50.62	13.4	1.1	33.18	100	0	P	V
		121.18	27.08	-16.42	43.5	40.89	17.6	1.65	33.06	-	-	P	V
		200.72	30.41	-13.09	43.5	46.04	15.11	2.16	32.9	-	-	P	V
		570.29	25.37	-20.63	46	29.03	25.56	3.64	32.86	-	-	P	V
		935.98	28.31	-17.69	46	25.28	30.48	4.68	32.13	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	**Fundamental Frequency** which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is **over limit** line.
P/A	**P**eak or **A**verage
H/V	**H**orizontal or **V**ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1	802.11a	98.28	-	-	10Hz
2	802.11a	98.28	-	-	10Hz
1+2	802.11n HT20	98.16	-	-	10Hz
1+2	802.11n HT40	96.32	0.949	1.053	1.1kHz
1+2	802.11ac VHT80	93.28	0.462	2.163	2.2kHz

SISO <Ant.1>

802.11a

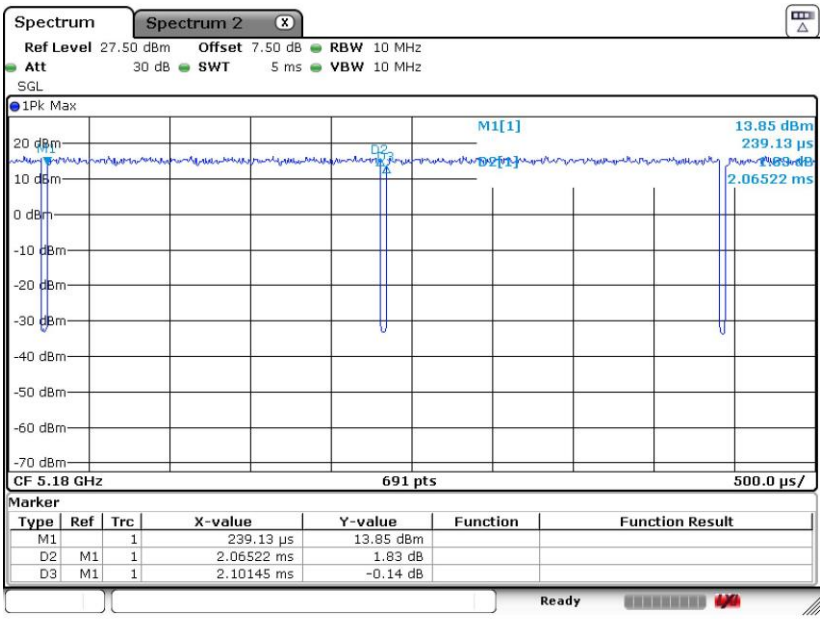

SISO <Ant.2>

802.11a

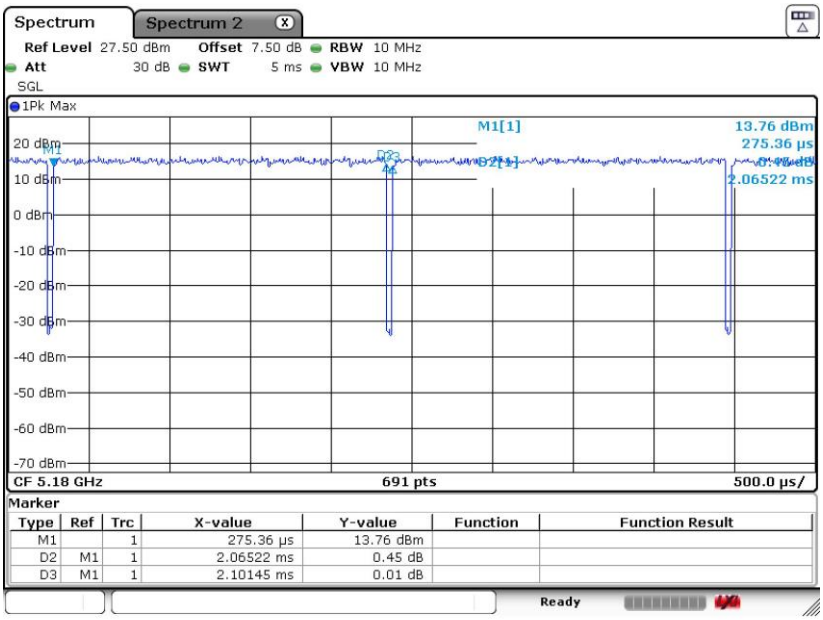

MIMO <Ant. 1+2>

802.11n HT20

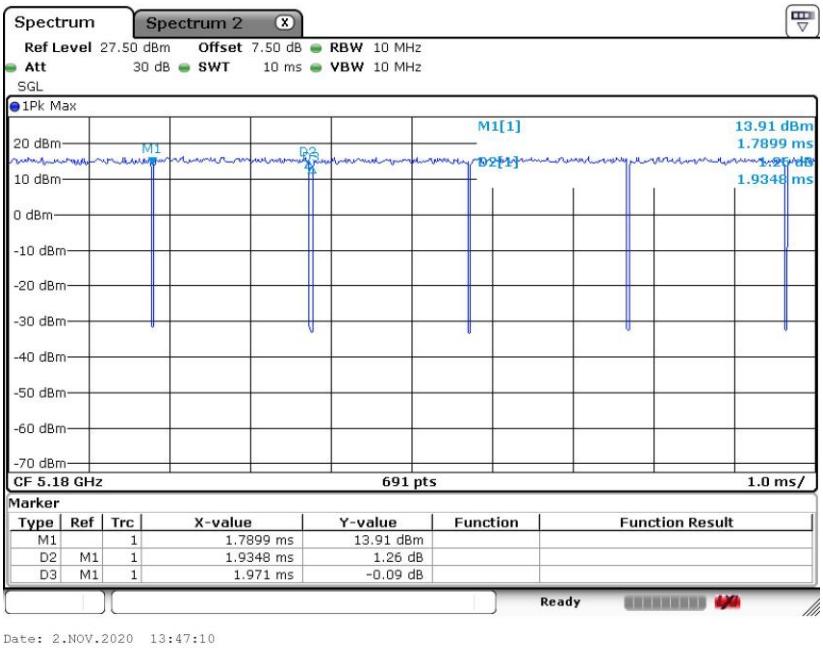

802.11n HT40

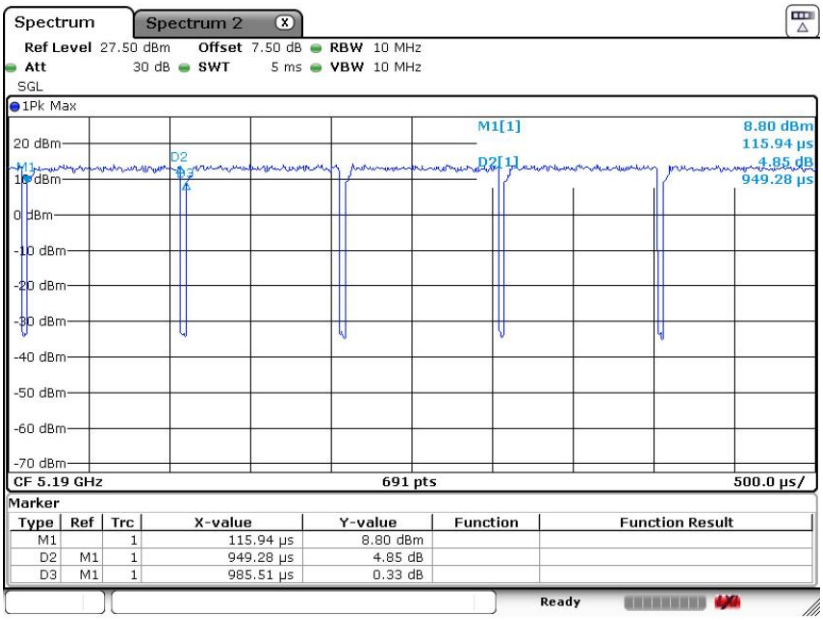

Date: 2.NOV.2020 13:43:06

802.11ac VHT80

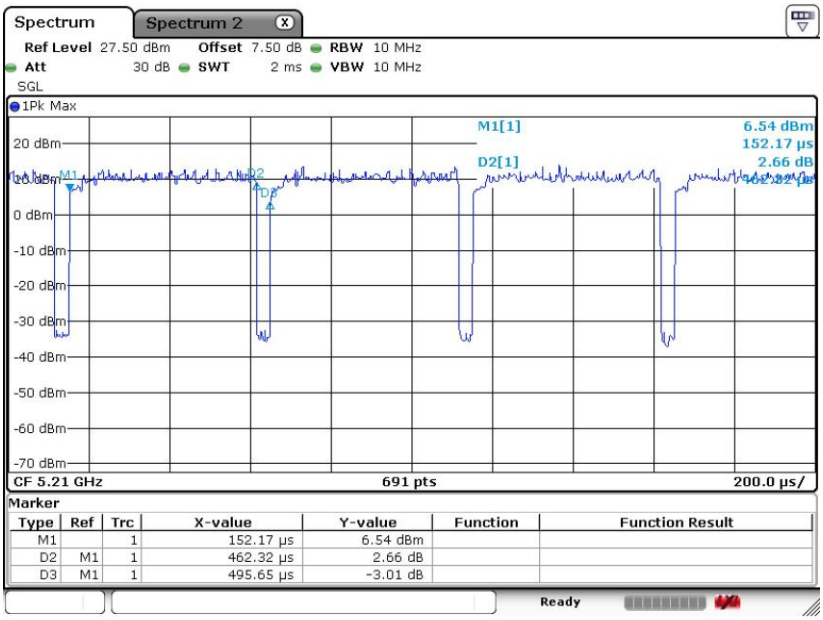

Date: 2.NOV.2020 13:55:06