



Report No.: SUCR250300016804
Page: 1 of 85

TEST REPORT

Application No.: SUCR2503000168AT
Applicant: Elo Touch Solutions, Inc.
Address of Applicant: 670 N. McCarthy Blvd., Suite 100, Milpitas, CA 95035, USA.
Manufacturer: Elo Touch Solutions, Inc.
Address of Manufacturer: 670 N. McCarthy Blvd., Suite 100, Milpitas, CA 95035, USA.
EUT Description: Handheld Terminal
Model No.: EMC-HRPR1.3
Trade Mark: Elo
FCC ID: RBWEMCHRPR
Standards: FCC 47 CFR Part 2, Subpart J
FCC 47 CFR Part 15, Subpart C
Date of Receipt: 2025-03-11
Date of Test: 2025-04-17 to 2025-10-14
Date of Issue: 2025-10-20

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Version

Revision Record			
Version	Description	Date	Remark
01	Original	2025-10-20	/

Authorized for issue by:			
Tested By		Nature Shen	
		Nature Shen / Project Manager	
Approved By		Cedar cheng	
		Cedar Cheng/Technical Manager	

Contents

Version	2
1 Test Summary.....	4
2 General Information	5
2.1 Details of Client	5
2.2 Test Location	5
2.3 Test Facility	5
2.4 General Description of EUT	6
2.5 Test Environment.....	8
2.6 Description of Support Units	8
3 Equipment List	9
4 Measurement Uncertainty (95% confidence levels, k=2)	11
5 Test results and Measurement Data.....	12
5.1 Antenna Requirement.....	12
5.2 AC Power Line Conducted Emissions.....	13
5.3 Duty Cycle	17
5.4 Conducted Output Power.....	18
5.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	19
5.6 Power Spectral Density.....	20
5.7 Band-edge for RF Conducted Emissions	21
5.8 RF Conducted Spurious Emissions	22
5.9 Radiated Spurious Emissions	23
5.10 Restricted bands around fundamental frequency	26
6 Photographs - Setup Photos	28
7 Appendix.....	29

1 Test Summary

Test Item	FCC Rule No.	Test Method	Test Result	Result
Antenna Requirement	15.203/15.247(b)	--	Clause 5.1	PASS
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013 Section 6.2	Clause 5.2	PASS
Duty cycle	--	ANSI C63.10 2013 Section 11.6	Clause 5.3	For Report Purpose
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013 Section 11.9.1.3	Clause 5.4	PASS
DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 2013 Section 11.8 Option 2 / 6.9.3	Clause 5.5	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10 2013 Section 11.10.2	Clause 5.6	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013 Section 11.13.3	Clause 5.7	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013 Section 11.11	Clause 5.8	PASS
Radiated Spurious Emissions	15.205/15.209	ANSI C63.10 2013 Section 11.12	Clause 5.9	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.205/15.209	ANSI C63.10 2013 Section 11.12	Clause 5.10	PASS

2 General Information

2.1 Details of Client

Applicant:	Elo Touch Solutions, Inc.
Address of Applicant:	670 N. McCarthy Blvd., Suite 100, Milpitas, CA 95035, USA.
Manufacturer:	Elo Touch Solutions, Inc.
Address of Manufacturer:	670 N. McCarthy Blvd., Suite 100, Milpitas, CA 95035, USA.

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	King-p Li, Levi Li

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

2.4 General Description of EUT

Hardware Version:	V1.03	
Software Version:	6.000.007.0024+ap	
IMEI:	RF Conducted	352461799002073
	RSE & AC power line	352461799000144
Operation Frequency:	2400MHz~2483.5MHz fc = 2402 MHz + N * 2 MHz, where: -fc = “Operating Frequency” in MHz, -N = “Channel Number” with the range from 0 to 39.	
Bluetooth version:	Bluetooth V5.1	
Modulation Type:	GFSK	
Number of Channel:	40	
Rates Type*:	☒ Provided by client	
	1M PHY	2M PHY
Antenna Type:	☐ External, ☒ Integrated	
Antenna Gain:	1.7dBi	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
RF Cable:	1dB	
Note: Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.		

Operation Frequency of each channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH0)	2402MHz
The Middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

2.5 Test Environment

Environment Parameter	101 kPa Selected Values During Tests	
Relative Humidity	44-46 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	22~23	3.8
Remark: NV: Normal Voltage NT: Normal Temperature		

2.6 Description of Support Units

The EUT has been tested as an independent unit.

3 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
2	LISN	R&S	ENV216	SUWI-01-19-03	5/6/2024	5/5/2026
3	LISN	Schwarzbeck	ENV216	SUWI-01-19-04	5/6/2024	5/5/2026
4	Test Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	N.C.R	N.C.R
RF Conducted Test						
1	Shielding Room	Brilliant-emc	N/A	SUWI-04-08-01	11/9/2022	11/8/2025
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2024	11/20/2025
4	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/15/2025	1/14/2026
5	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	3/27/2025	3/26/2026
6	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-8-01	1/16/2025	1/15/2026
7	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	3/17/2025	3/16/2026
8	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	5/6/2024	5/7/2026
9	Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	11/19/2024	11/18/2025
10	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/19/2024	11/18/2025
11	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/19/2024	11/18/2025
12	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/19/2024	11/18/2025
13	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
14	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/13/2025	2/12/2026
15	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	5/9/2024	5/6/2026
16	Measurement Software	TST	TST 272 V2.0	SUWI-03-55-03	NCR	NCR
17	RF Control Unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
18	RF Control Unit	TST	TSCB3023R2	SUWI-02-21-01	NCR	NCR
19	RF cables	Tonscend	NA	SUWI-01-03-01	11/19/2024	11/18/2025
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-09	11/21/2024	11/20/2025
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/16/2025	1/15/2026
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	8/22/2024	8/21/2026
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/13/2023	2025/5/12
					5/7/2025	5/6/2027
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/13/2023	2025/5/12
					5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/13/2023	2025/5/12
					5/7/2025	5/6/2027
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/16/2025	1/15/2026
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/16/2025	1/15/2026
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	9/10/2024	9/9/2025
					8/25/2025	8/24/2026
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/19/2024	11/18/2025



15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	9/10/2024	9/9/2025
					8/26/2025	8/25/2026
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/19/2024	11/18/2025
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/16/2025	1/15/2026
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF cables	Tonscend	NA	SUWI-01-03-02	11/19/2024	11/18/2025

Remark: NCR=No Calibration Requirement.

4 Measurement Uncertainty (95% confidence levels, k=2)


No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±7.25x 10 ⁻⁸
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±7.25x 10 ⁻⁸
7	Conduction Emission	± 2.90dB (150kHz to 30MHz)
8	Radiated Emission	± 3.13dB (9k -30MHz)
		± 4.80dB (30M -1GHz)
		± 4.80dB (1GHz to 18GHz)
		± 4.80dB (Above 18GHz)
Remark: The U _{lab} (lab Uncertainty) is less than U _{CISPR/ETSI} (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is Integrated Antenna and no consideration of replacement. The best case gain of the antenna is 1.7dBi. <i>Note:</i> <i>The antenna gain are derived from the gain information report provided by the manufacturer.</i> <i>Remark:</i> <i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i>	

5.2 AC Power Line Conducted Emissions

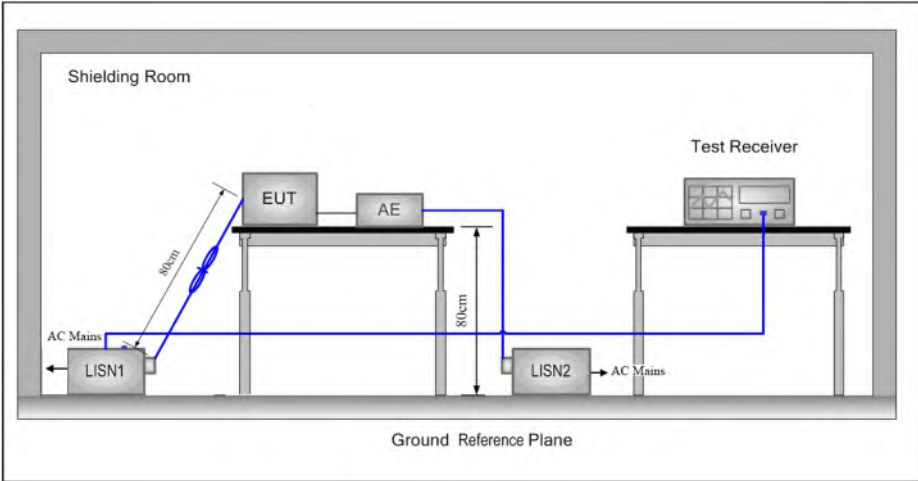Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013 Section 6.2		
Test Frequency Range:	150kHz to 30MHz		
Receiver Setup:	RBW = 9kHz, VBW = 30kHz		
Limit:	Frequency range(MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			
Test Mode:	Transmitting with GFSK modulation.		




Report No.: SUCR250300016804
Page: 14 of 85


	Adapter + Transmitting mode.
Instruments Used:	Refer to section 3 for details.
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

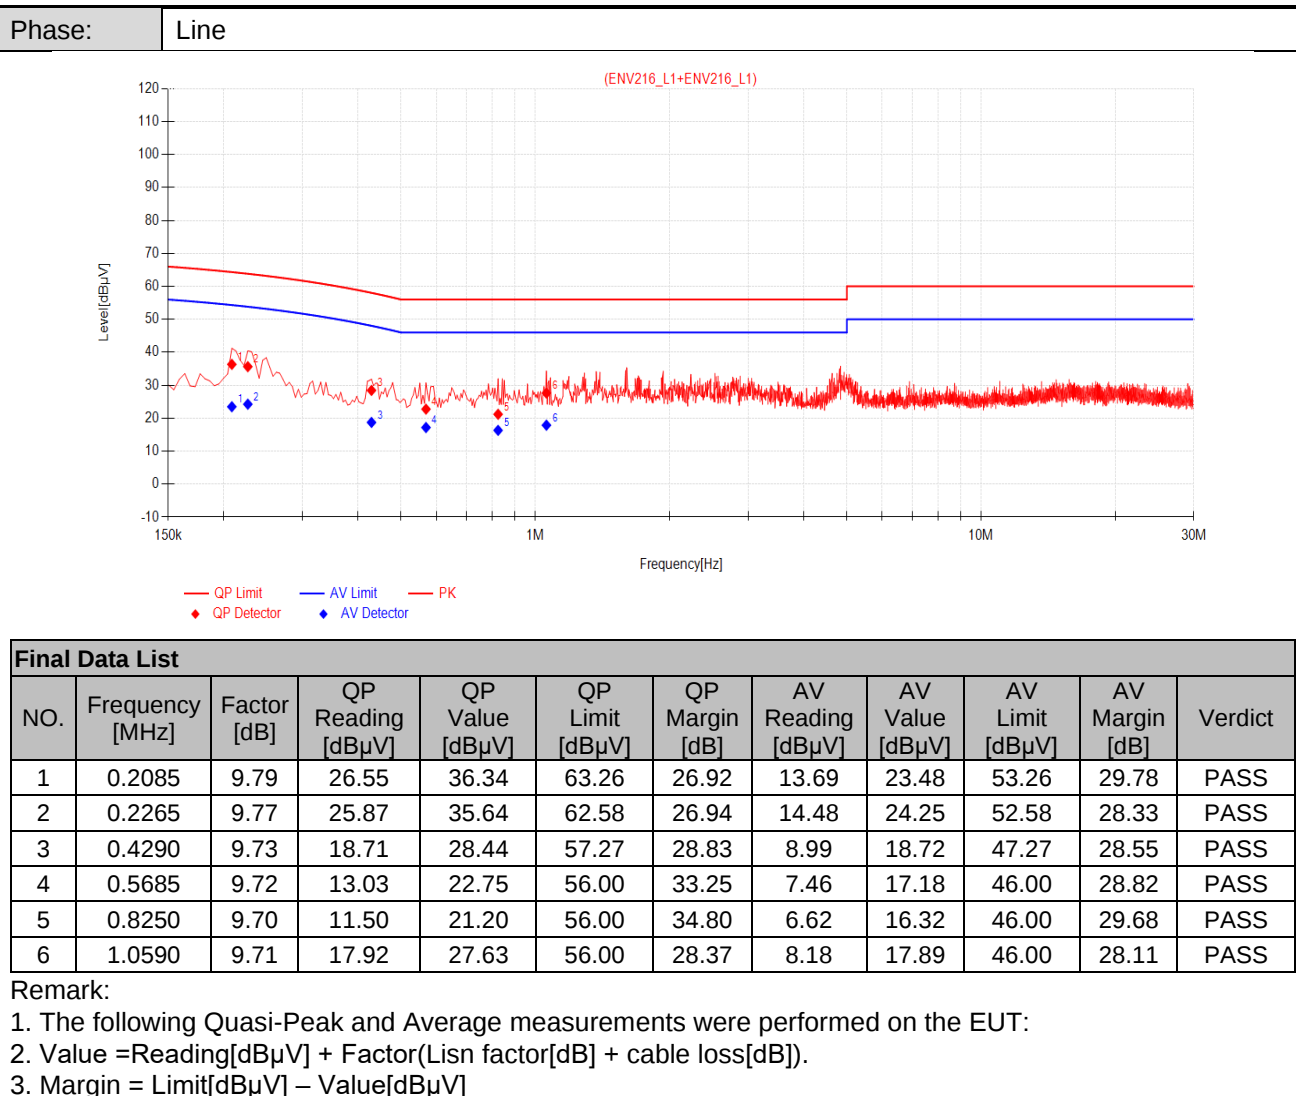


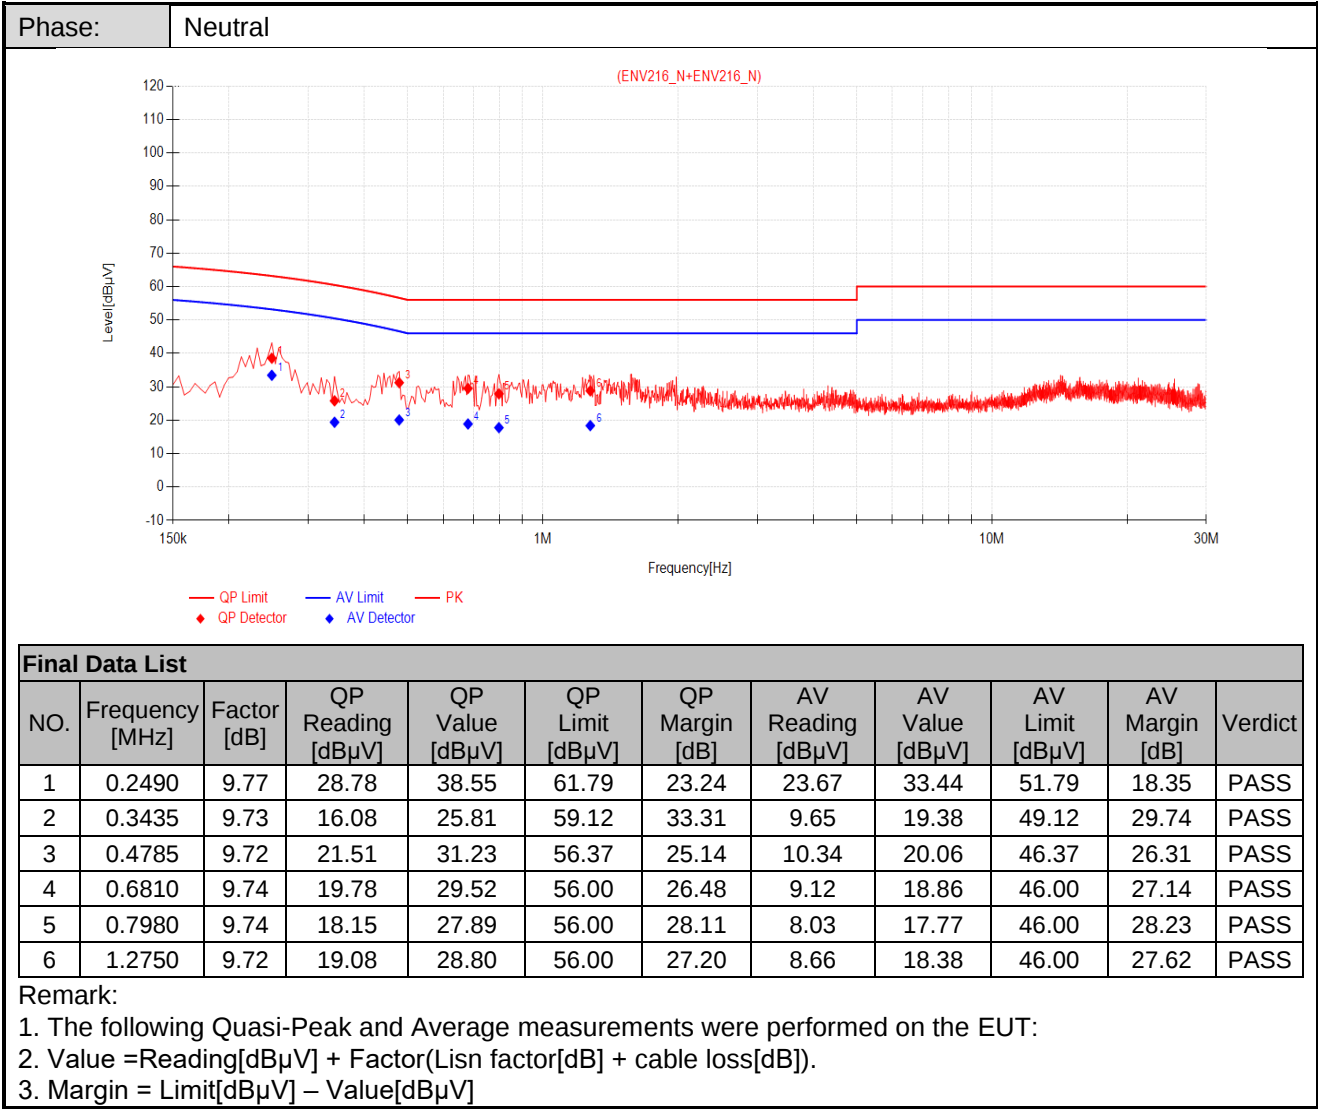


Remark:

- The following Quasi-Peak and Average measurements were performed on the EUT:
- Value = Reading[dBμV] + Factor(Lin factor[dB] + cable loss[dB]).
- Margin = Limit[dBμV] – Value[dBμV]


5.3 Duty Cycle

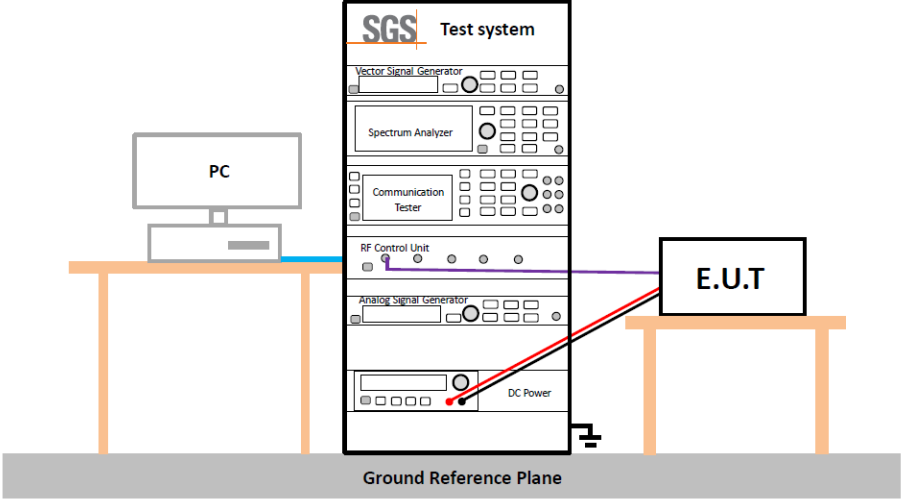Test Requirement:	ANSI C63.10 :2013 Section 11.6
Test Method:	ANSI C63.10 :2013 Section 11.6
Test Setup:	
Instruments Used:	Refer to section 3 for details
Test Mode:	Transmitting with GFSK modulation.
Limit:	No restriction limits
Test Results:	For Report Purpose
The detailed test data see: Appendix	


5.4 Conducted Output Power

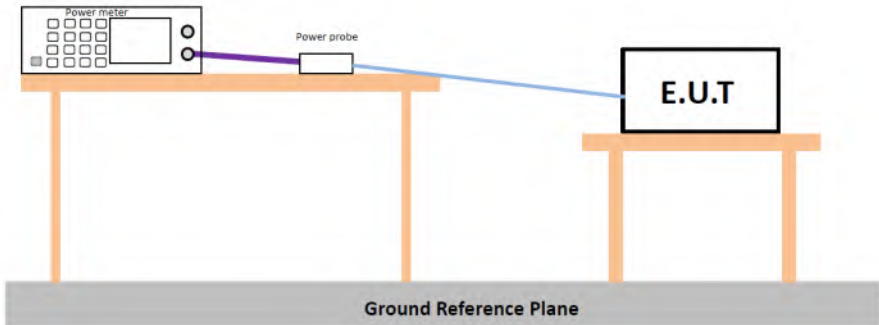Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 :2013 Section11.9.1.3
Test Setup:	 * Test with power meter (Detector function: Peak)
Test Instruments:	Refer to section 3 for details
Test Mode:	Transmitting with GFSK modulation.
Limit:	30dBm
Test Results:	Pass
The detailed test data see: Appendix	


5.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth

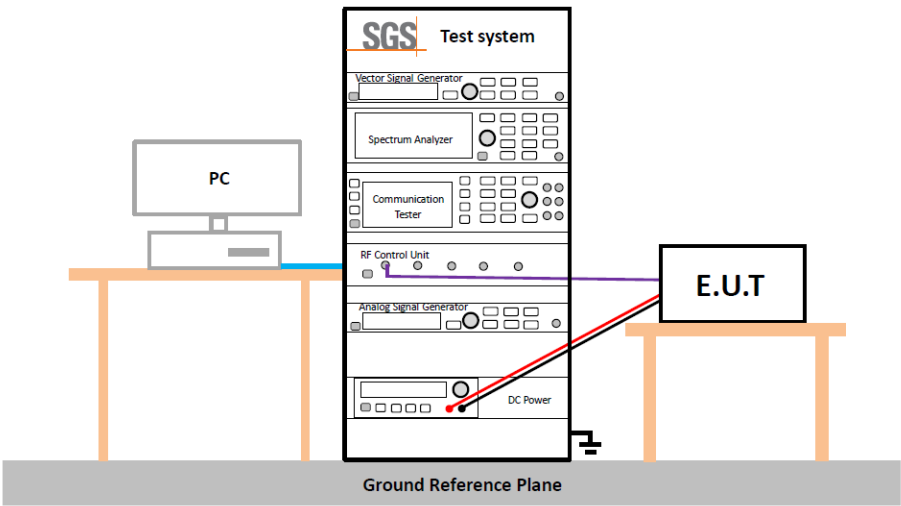Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013 Section 11.8 Option 2 / 6.9.3
Test Setup:	
Instruments Used:	Refer to section 3 for details
Test Mode:	Transmitting with GFSK modulation.
Limit:	≥ 500 kHz for DTS Bandwidth
Test Results:	Pass
The detailed test data see: Appendix	


5.6 Power Spectral Density

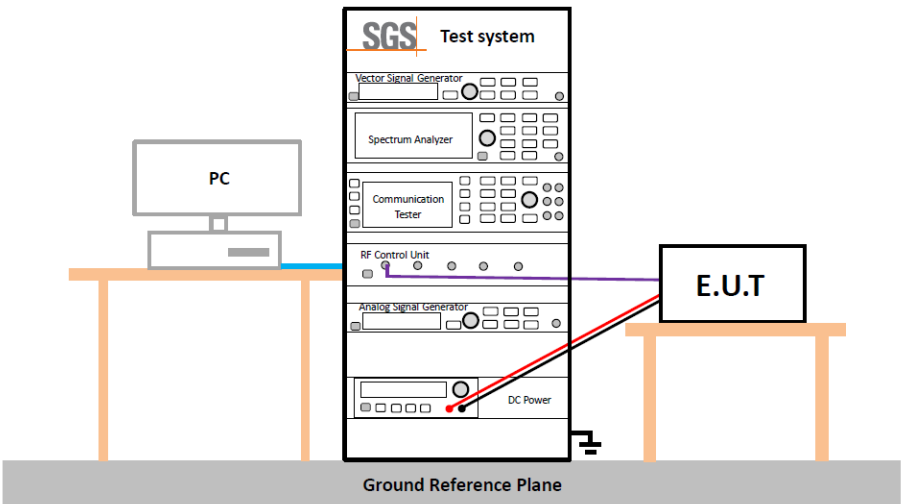Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 :2013 Section 11.10.2
Test Setup:	
Test Instruments:	Refer to section 3 for details
Test Mode:	Transmitting with GFSK modulation.
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass
The detailed test data see: Appendix	

5.7 Band-edge for RF Conducted Emissions

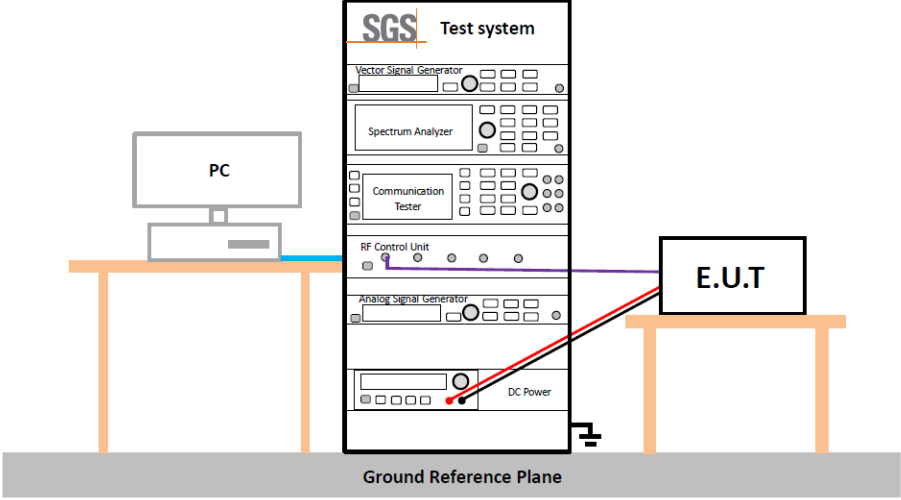Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13.3
Test Setup:	 The diagram illustrates the test setup for RF conducted emissions. A PC is connected to a test system. The test system consists of a Vector Signal Generator, Spectrum Analyzer, Communication Tester, RF Control Unit, Analog Signal Generator, and DC Power. The E.U.T. (Equipment Under Test) is connected to the RF Control Unit. All components are on a Ground Reference Plane.
Instruments Used:	Refer to section 3 for details
Test Mode:	Transmitting with GFSK modulation.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass
The detailed test data see: Appendix	

5.8 RF Conducted Spurious Emissions

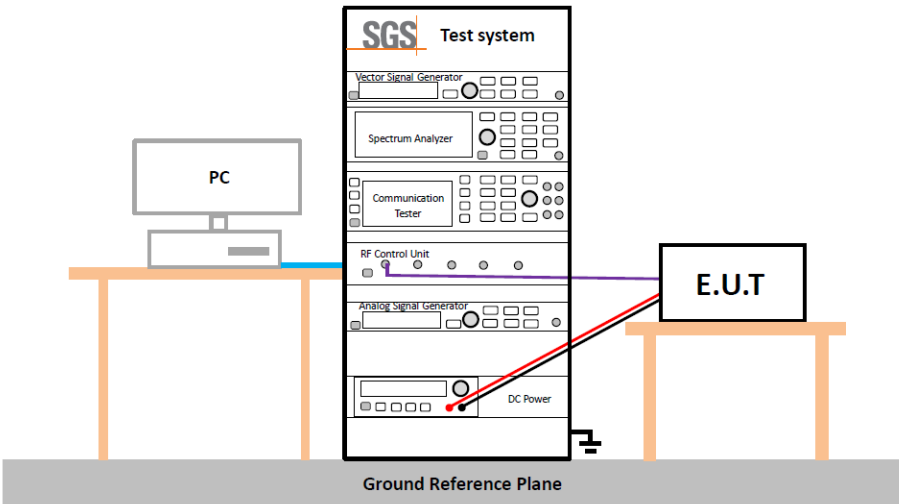Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	
Instruments Used:	Refer to section 3 for details
Test Mode:	Transmitting with GFSK modulation.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass
The detailed test data see: Appendix	

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Test Frequency:	9kHz ~ 25GHz				
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

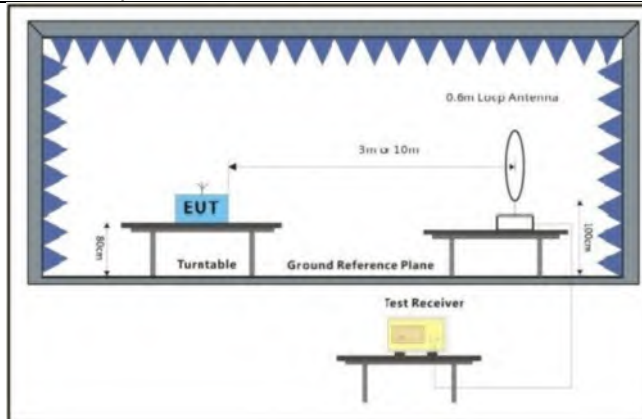


Figure 1. Below 30MHz

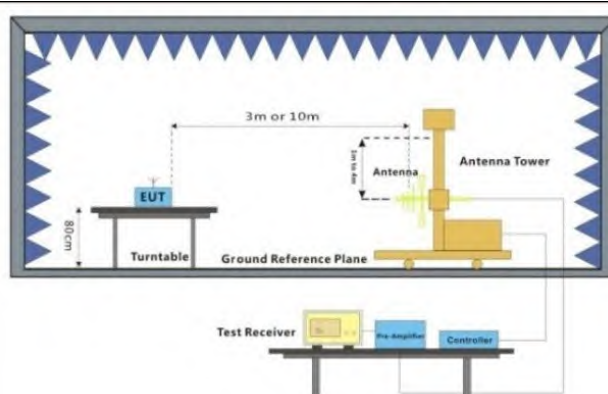


Figure 2. 30MHz to 1GHz

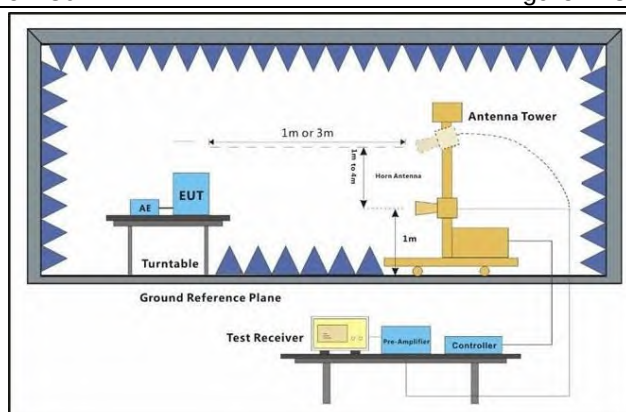


Figure 3. Above 1 GHz

Test Procedure:	- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz). - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Test the EUT in the lowest channel, the middle channel, the Highest channel. - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete. - The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported - The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. - At a measurement distance of 1 meter the limit line was increased by $20 \times \text{LOG}(3/1) = 9.54 \text{ dB}$.
Test Configuration:	Measurements below 30MHz • RBW = 10 kHz • VBW = 30 kHz • Detector = Peak & Average & Quasi-peak • Trace mode = max hold Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq 3 \text{ MHz}$ • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Exploratory Test Mode:	Transmitting with GFSK modulation. Adapter + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Adapter + Transmitting mode. For below 1GHz part, through pre-scan all channels, but only the worst case is recorded in the report.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass
The detailed test data see: Appendix	

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

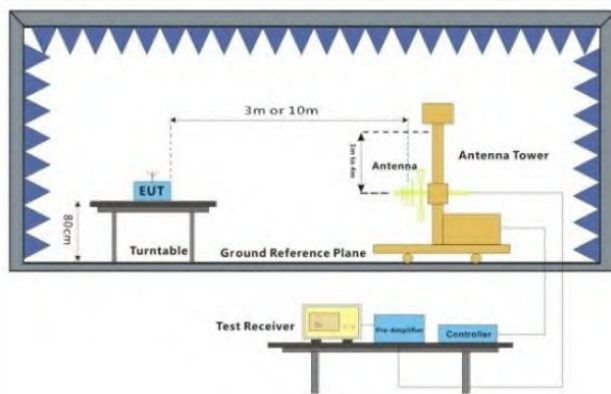


Figure 1. 30MHz to 1GHz

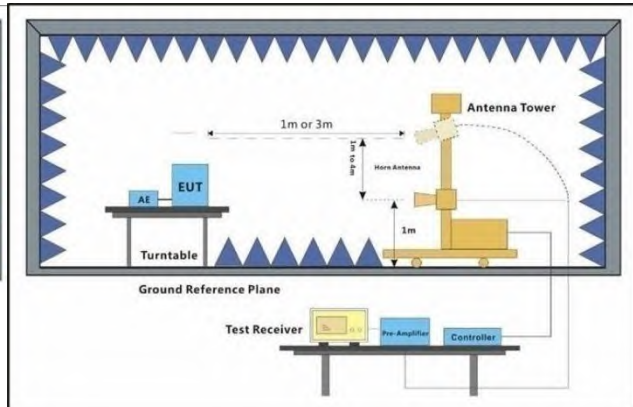


Figure 2. Above 1 GHz

Test Procedure:	- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
-----------------	--

	j. Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with GFSK modulation. Adapter + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Adapter + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass
The detailed test data see: Appendix	

6 Photographs - Setup Photos

Refer to Appendix A.2 BT&WLAN&NFC Setup Photos.

7 Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.394	0.625	63.04	2.00	0.03
		2440	0.393	0.625	62.88	2.01	0.00
		2480	0.394	0.625	63.04	2.00	0.00
2M	SISO	2402	0.208	0.625	33.28	4.78	0.00
		2440	0.229	0.625	36.64	4.36	0.02
		2480	0.208	0.625	33.28	4.78	0.00

1.2 Test Graph


1.2.1 Ant1

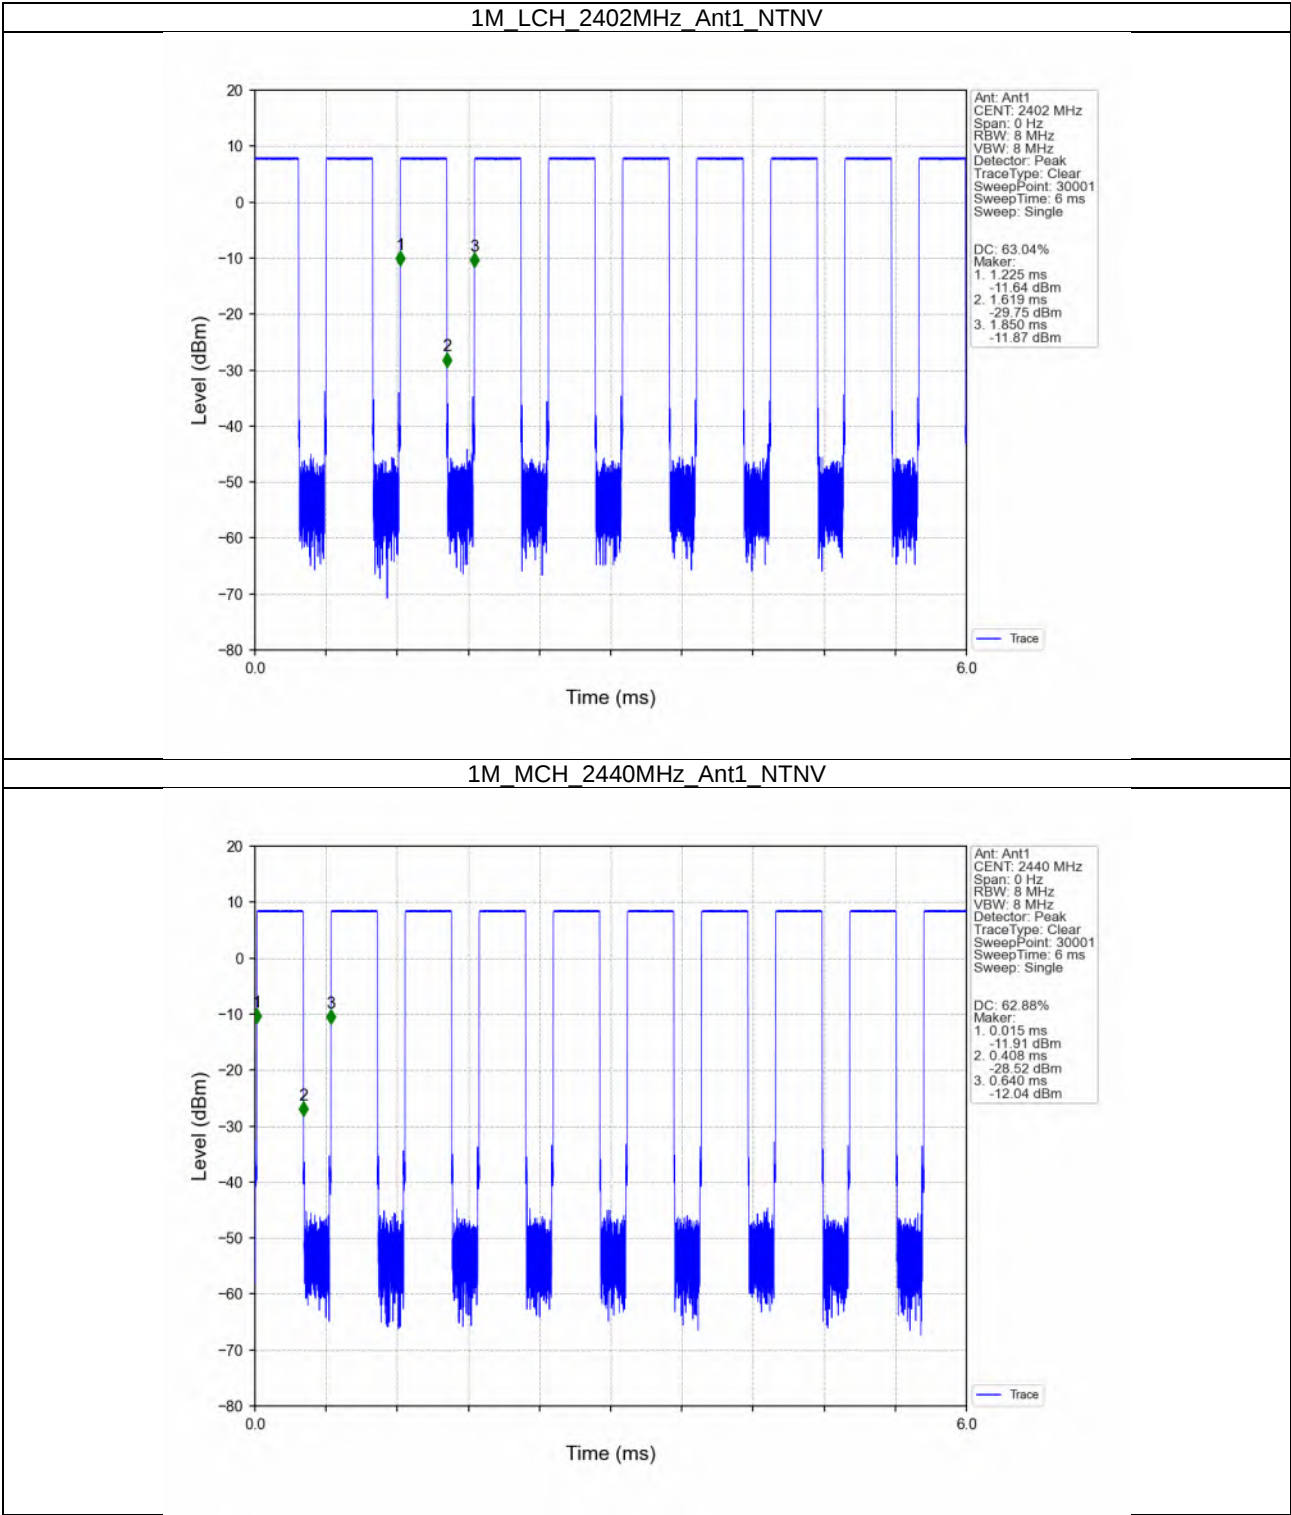


1M_HCH_2480MHz_Ant1_NTNV

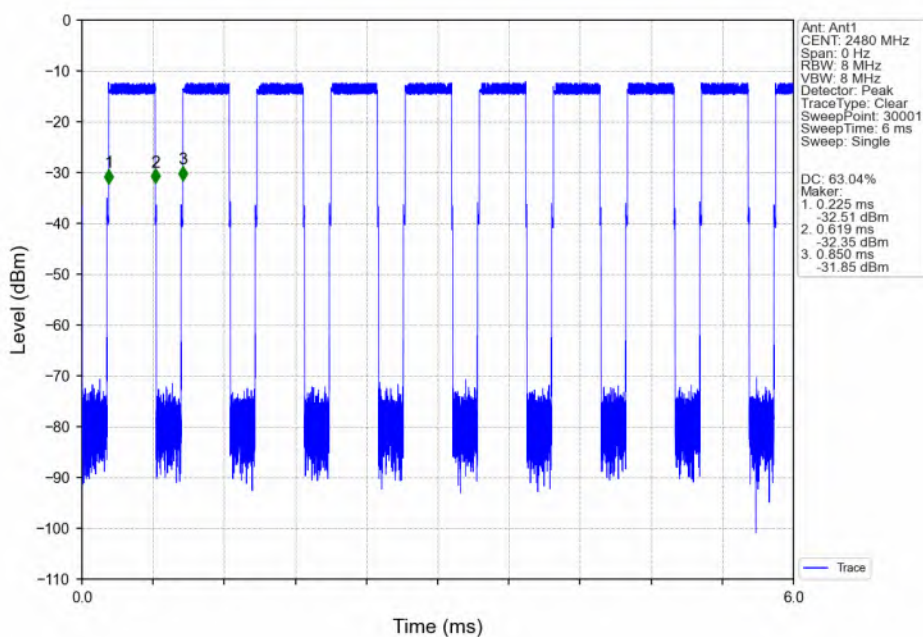


2M_LCH_2402MHz_Ant1_NTNV

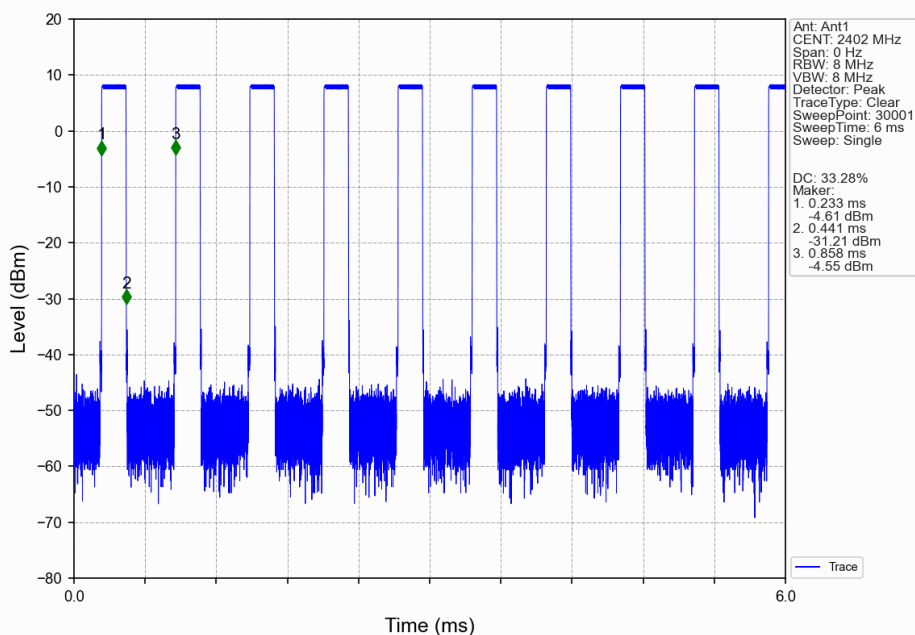

2M_MCH_2440MHz_Ant1_NTNV

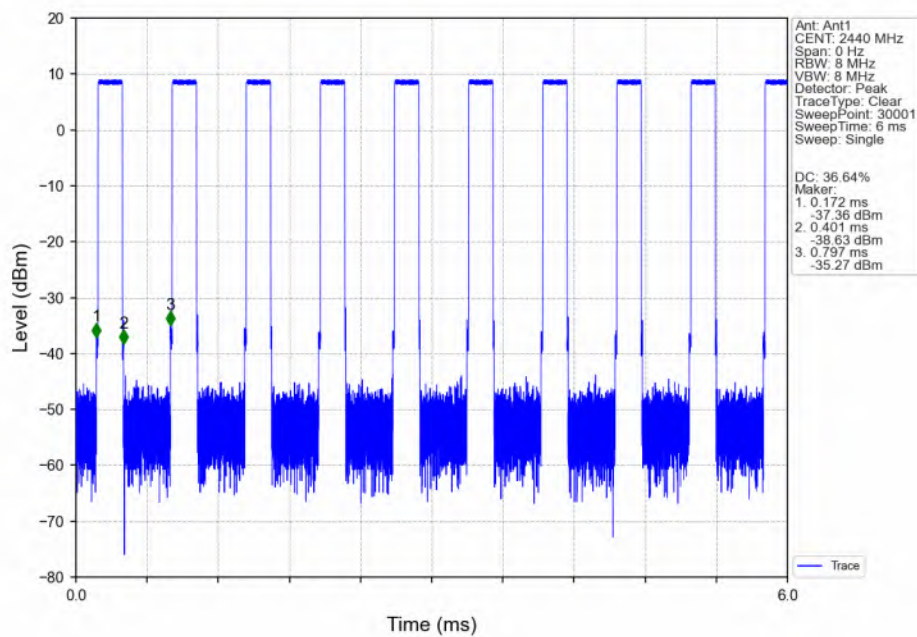

2M_HCH_2480MHz_Ant1_NTNV

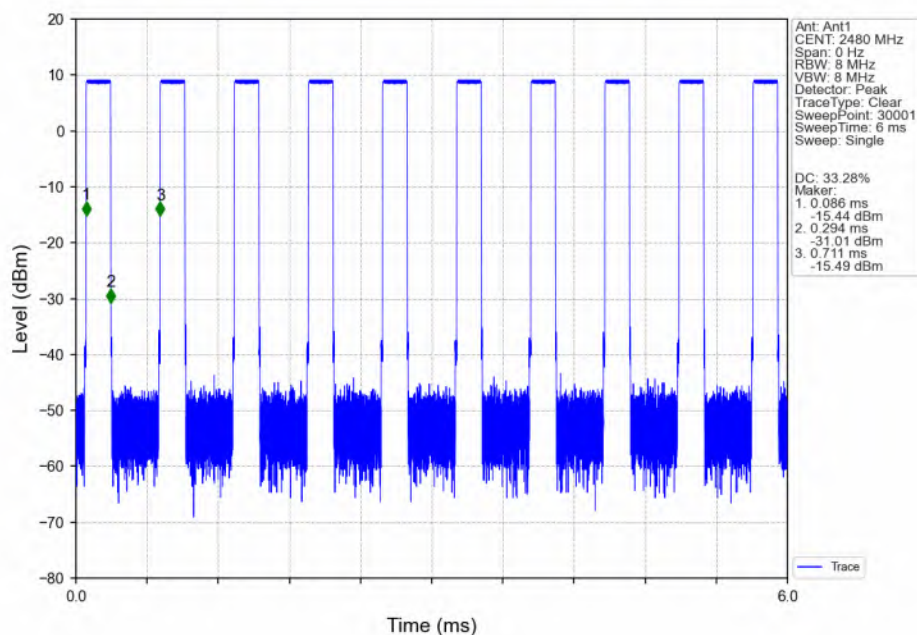

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.033	/	Pass
		2440	1	1.032	/	Pass
		2480	1	1.034	/	Pass
2M	SISO	2402	1	2.063	/	Pass
		2440	1	2.062	/	Pass
		2480	1	2.063	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.667	≥ 0.5	Pass
		2440	1	0.670	≥ 0.5	Pass
		2480	1	0.669	≥ 0.5	Pass
2M	SISO	2402	1	1.142	≥ 0.5	Pass
		2440	1	1.145	≥ 0.5	Pass
		2480	1	1.156	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

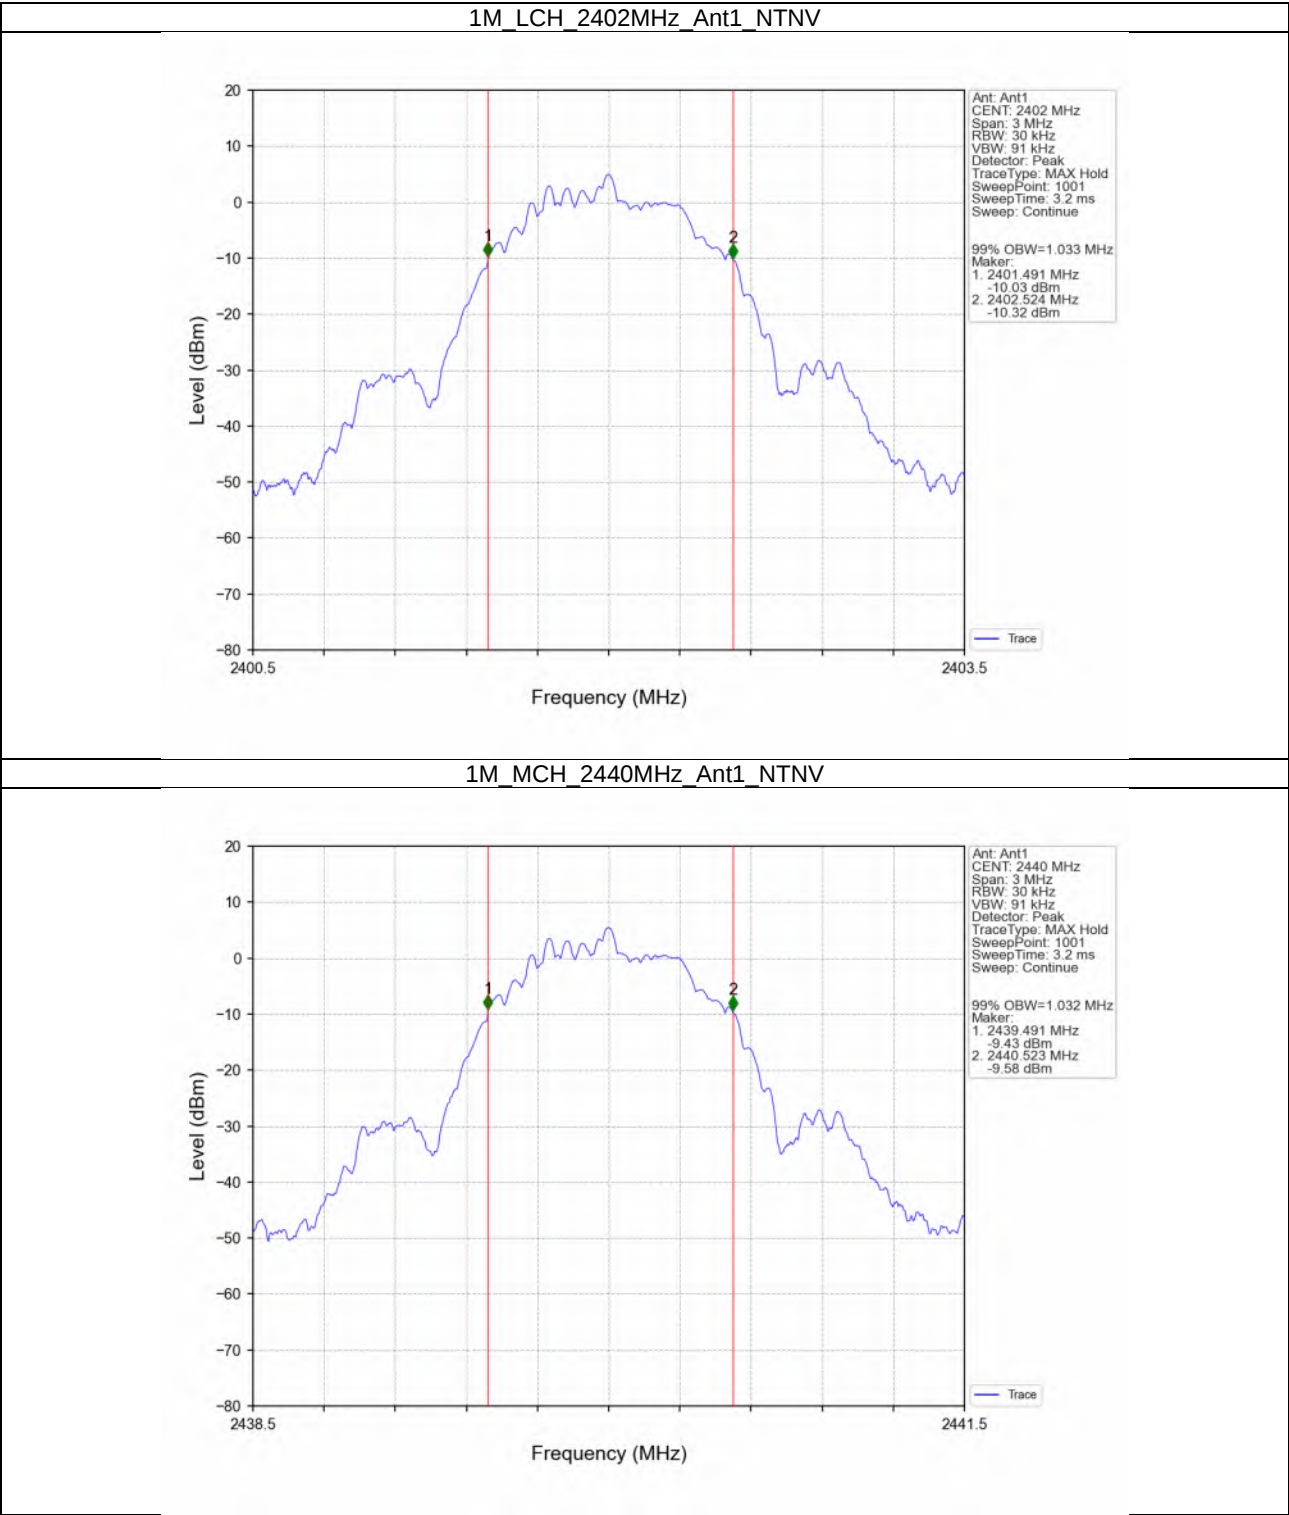


1M_HCH_2480MHz_Ant1_NTNV

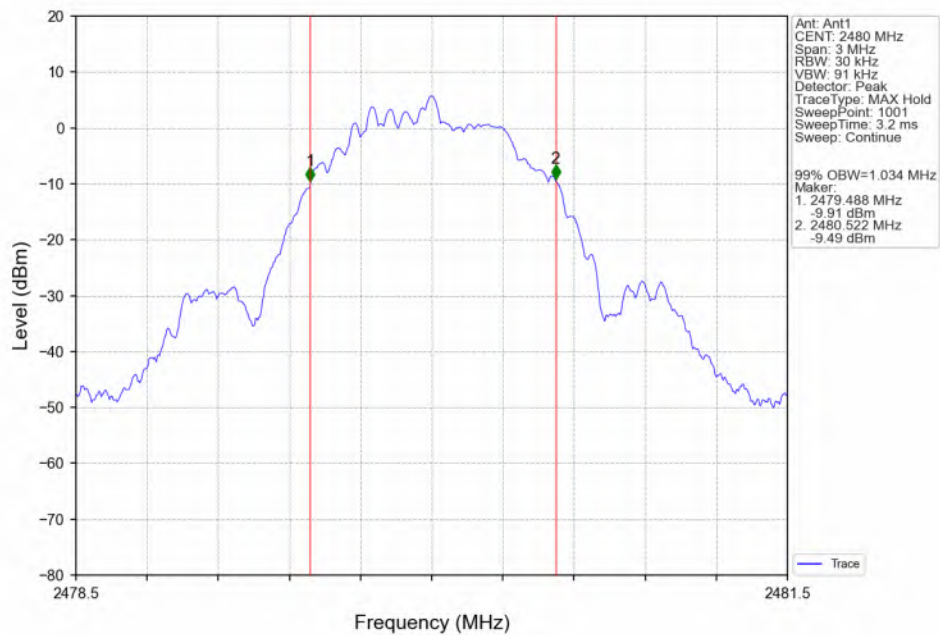


2M_LCH_2402MHz_Ant1_NTNV

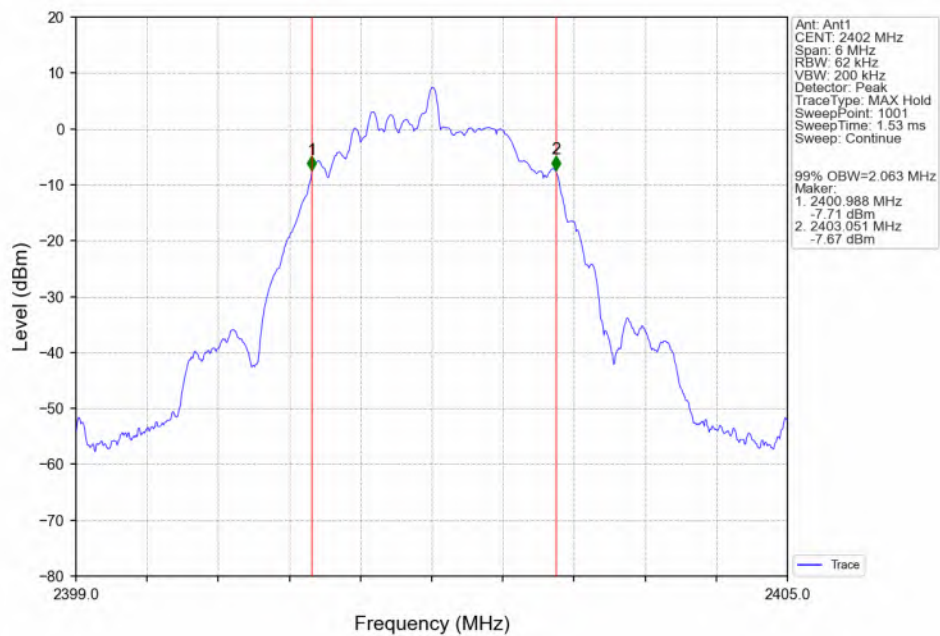


2M_MCH_2440MHz_Ant1_NTNV

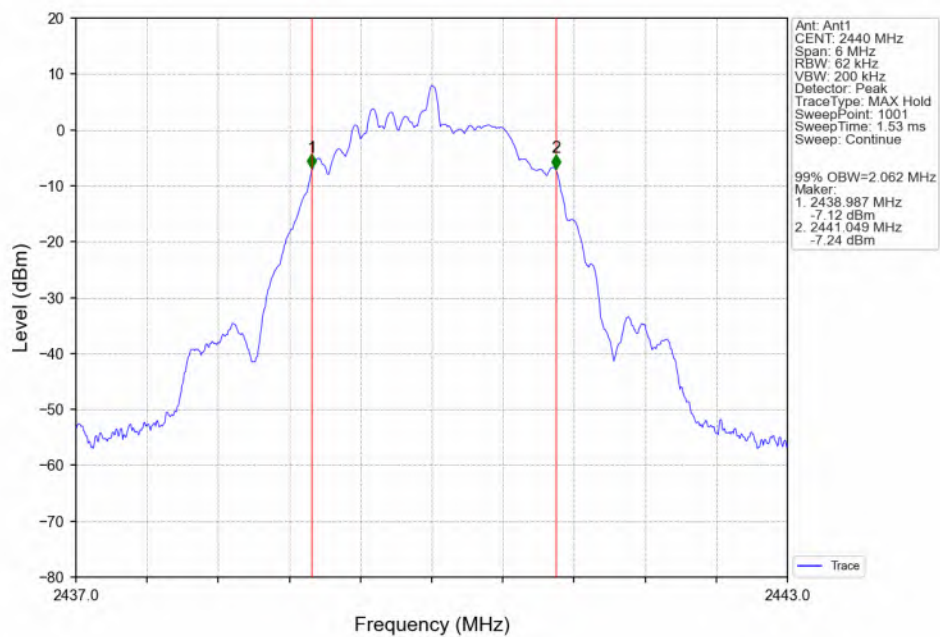


2M_HCH_2480MHz_Ant1_NTNV

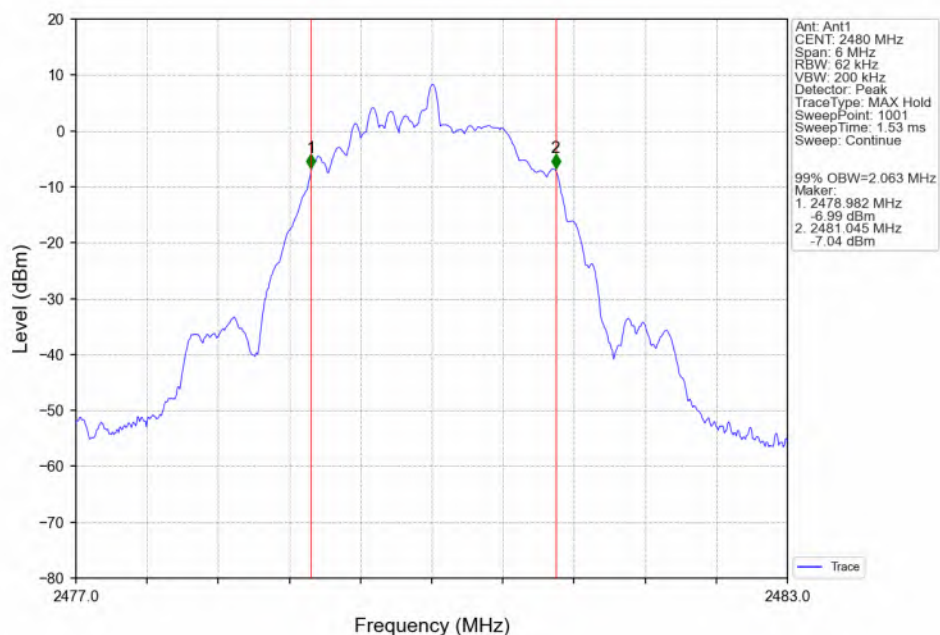


2.2.2 6dB BW

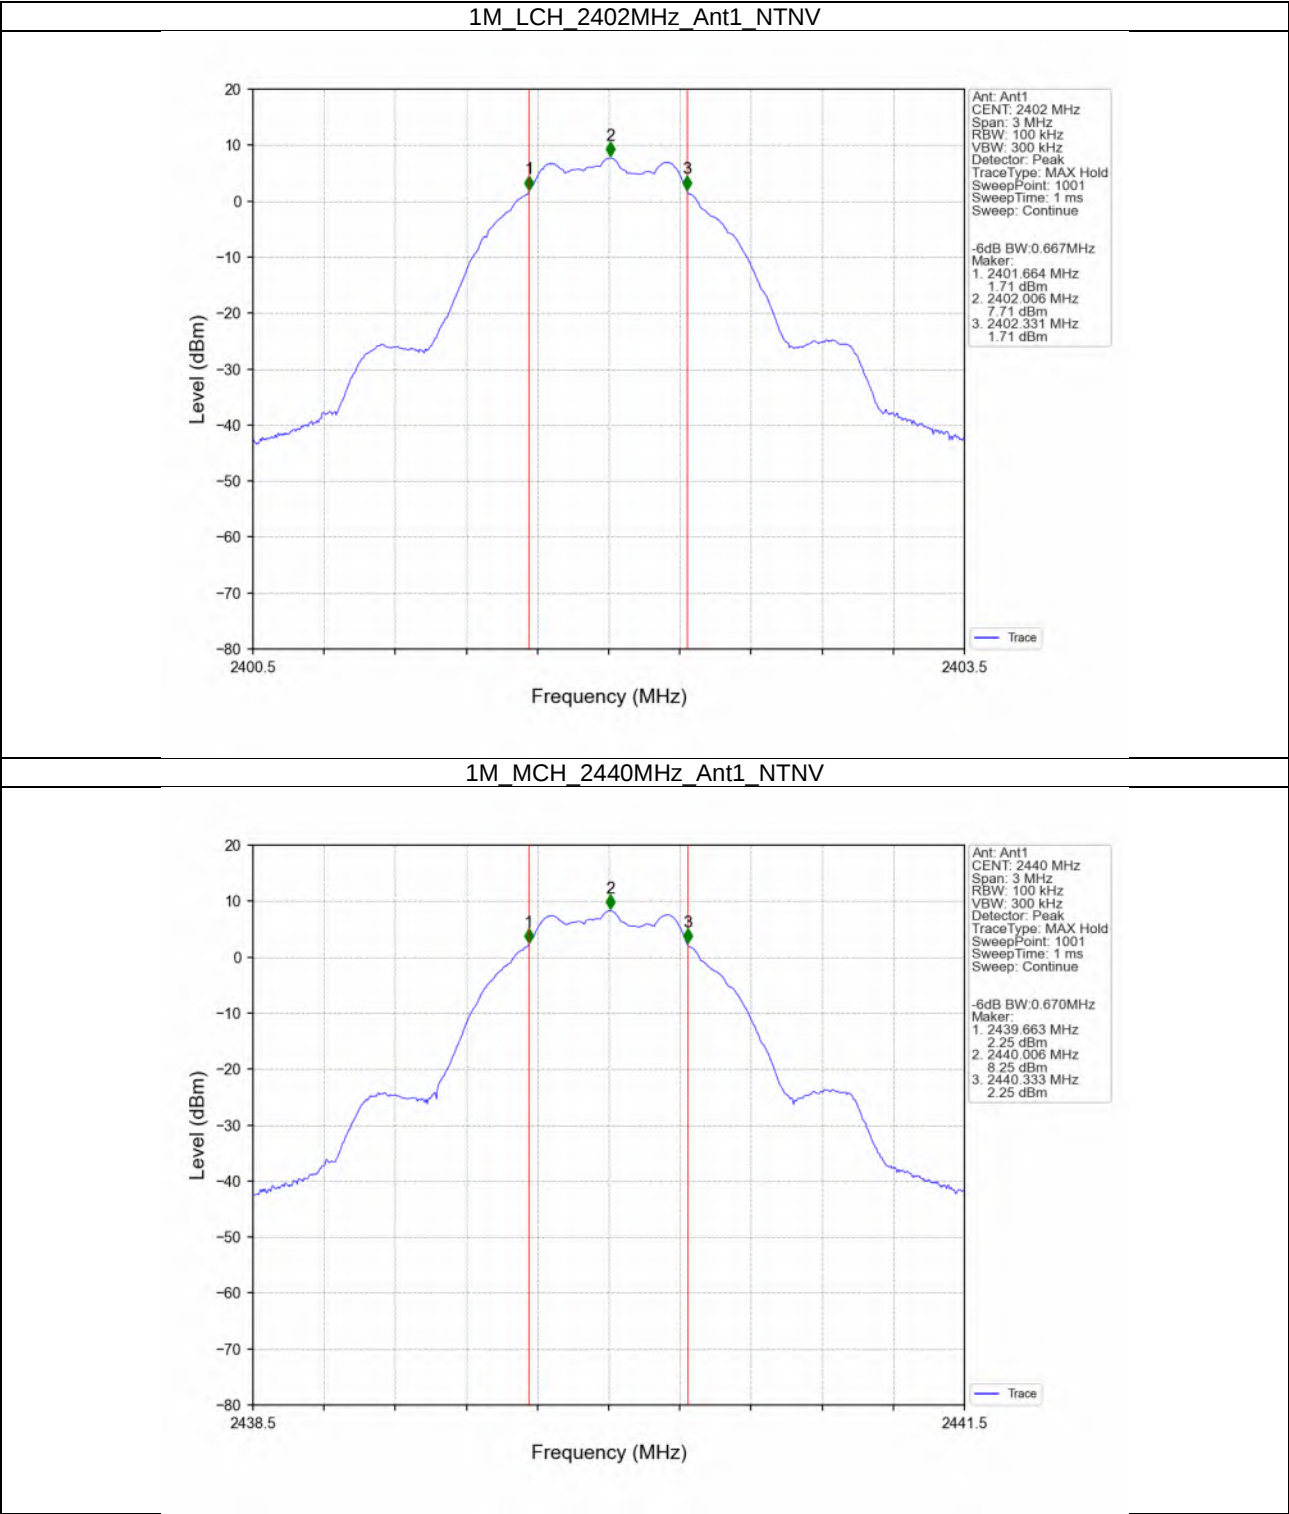


1M_HCH_2480MHz_Ant1_NTNV

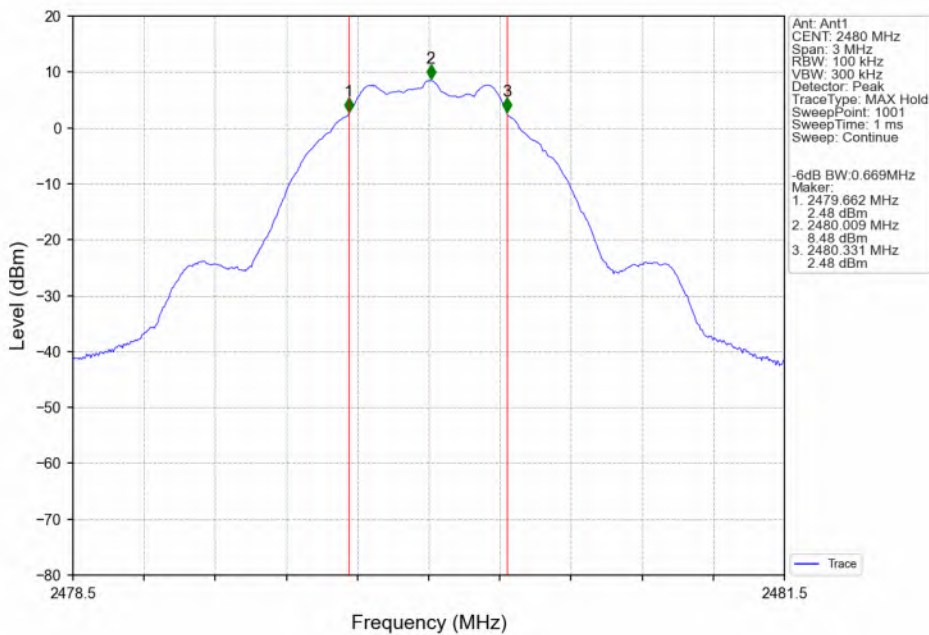


2M_LCH_2402MHz_Ant1_NTNV

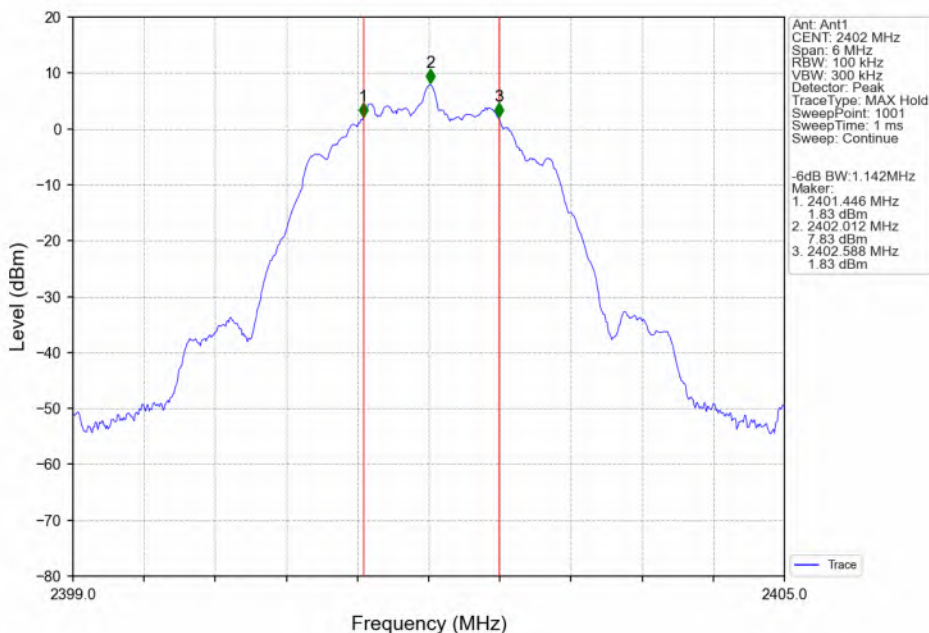

2M_MCH_2440MHz_Ant1_NTNV

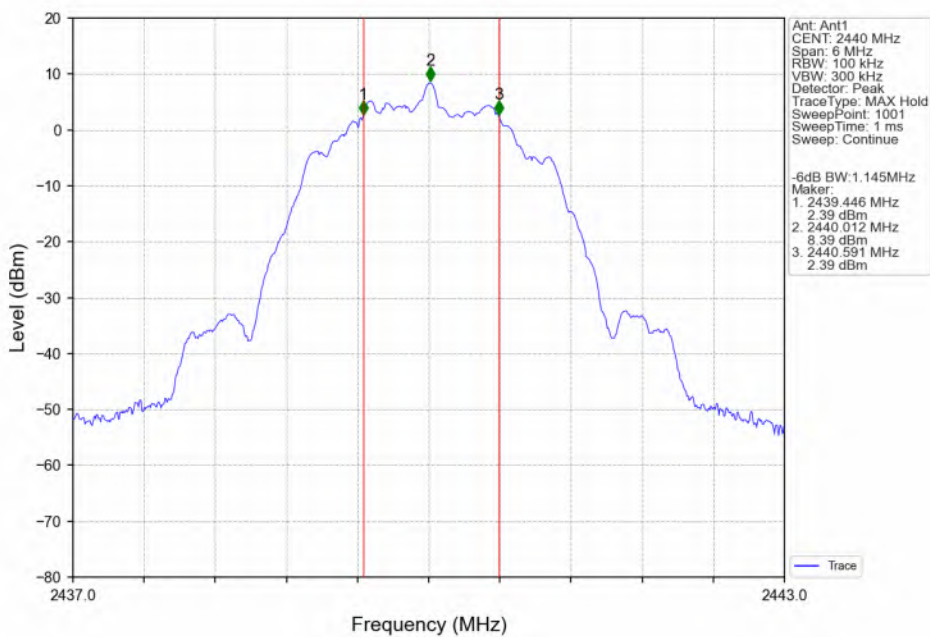

2M_HCH_2480MHz_Ant1_NTNV

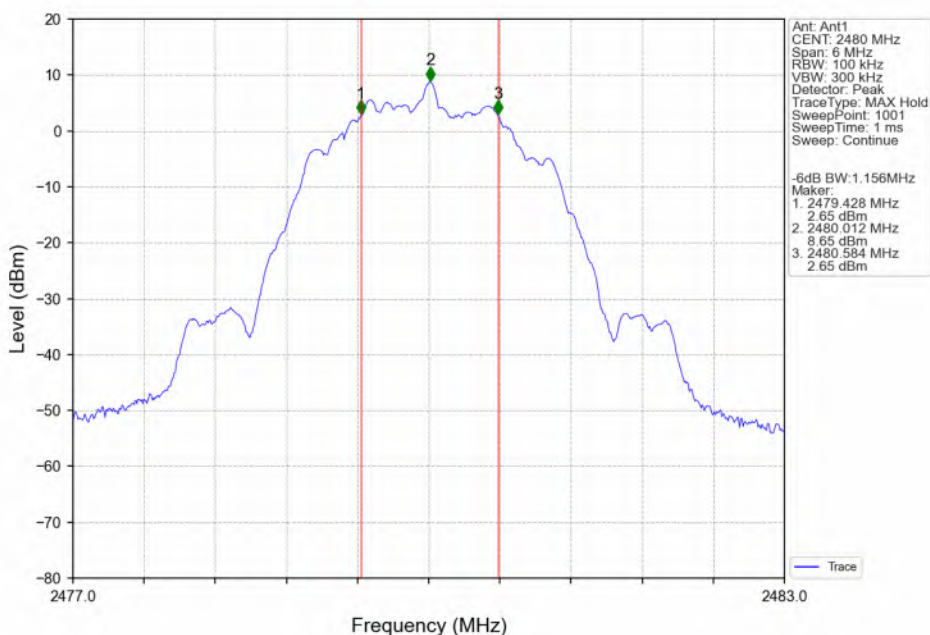

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	7.87	<=30	Pass
		2440	8.47	<=30	Pass
		2480	8.68	<=30	Pass
2M	SISO	2402	8.06	<=30	Pass
		2440	8.64	<=30	Pass
		2480	8.92	<=30	Pass
Note1: Antenna Gain: Ant1: 1.70dBi;					

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-6.90	<=8	Pass
		2440	-6.26	<=8	Pass
		2480	-6.10	<=8	Pass
2M	SISO	2402	-10.31	<=8	Pass
		2440	-9.79	<=8	Pass
		2480	-9.53	<=8	Pass
Note1: Antenna Gain: Ant1: 1.70dBi;					

4.2 Test Graph


4.2.1 PSD

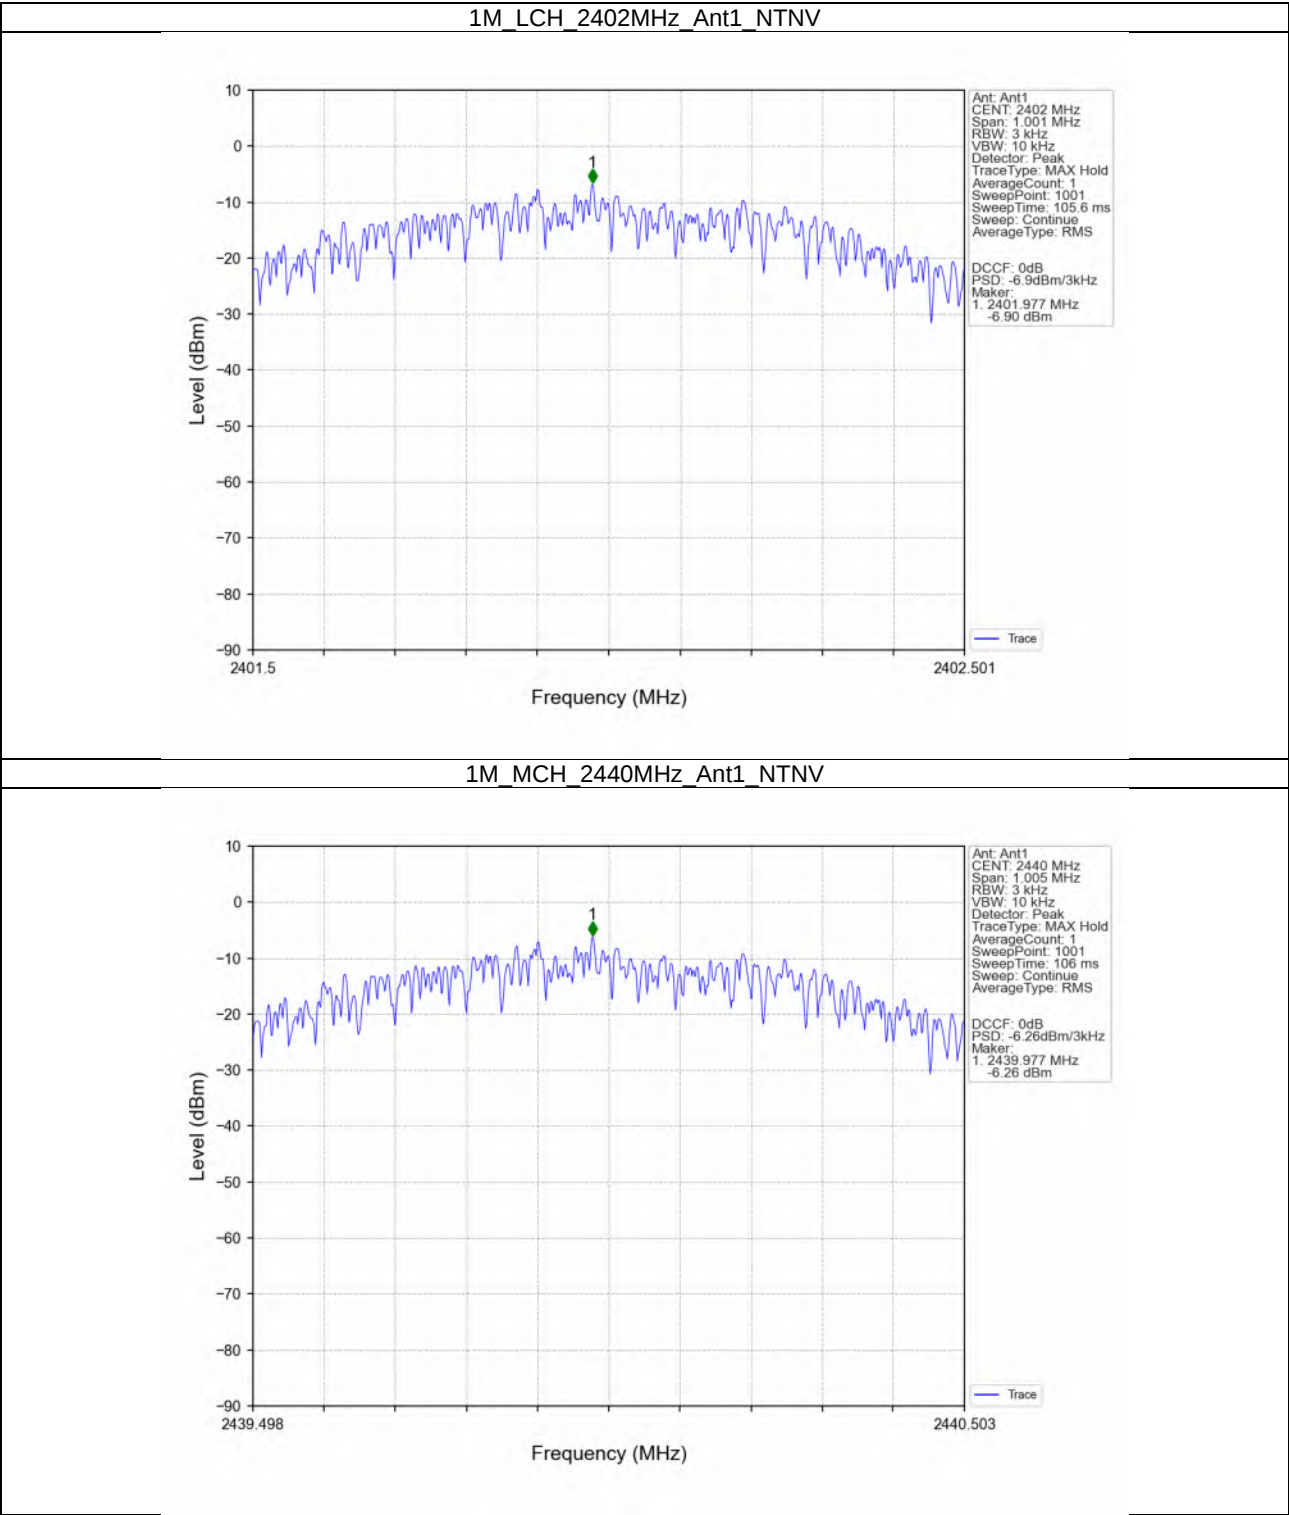


1M_HCH_2480MHz_Ant1_NTNV

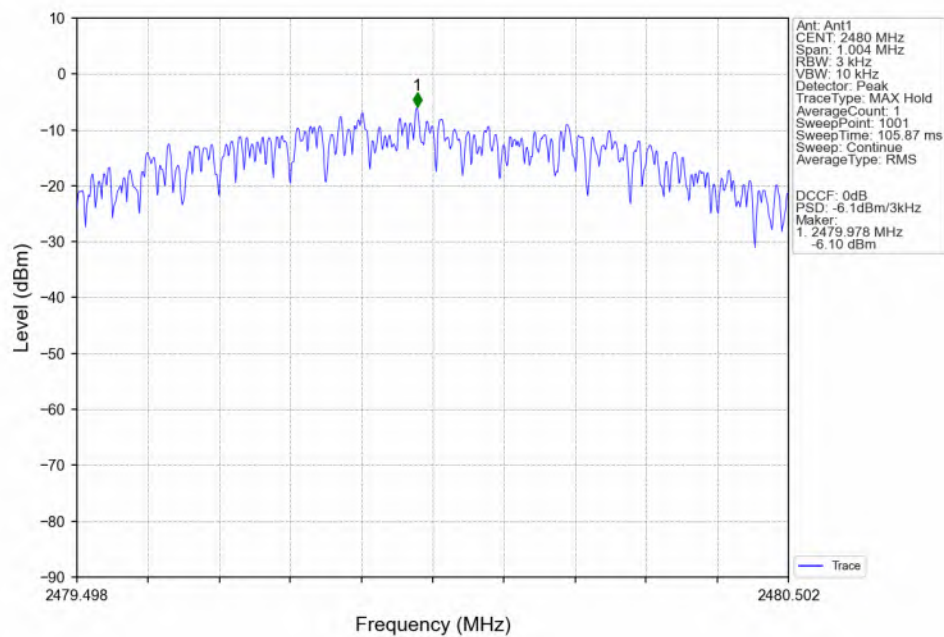


2M_LCH_2402MHz_Ant1_NTNV

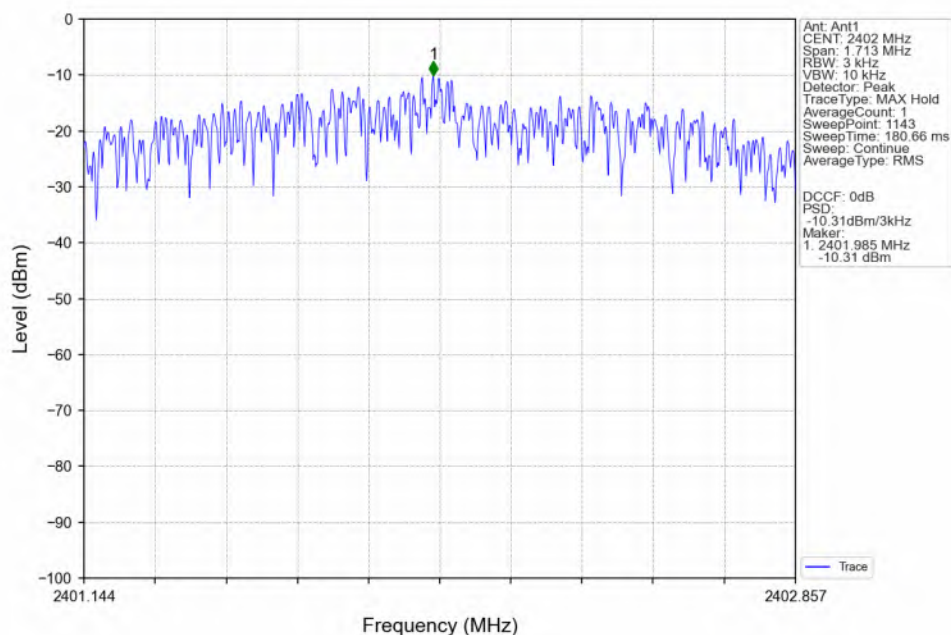

2M_MCH_2440MHz_Ant1_NTNV

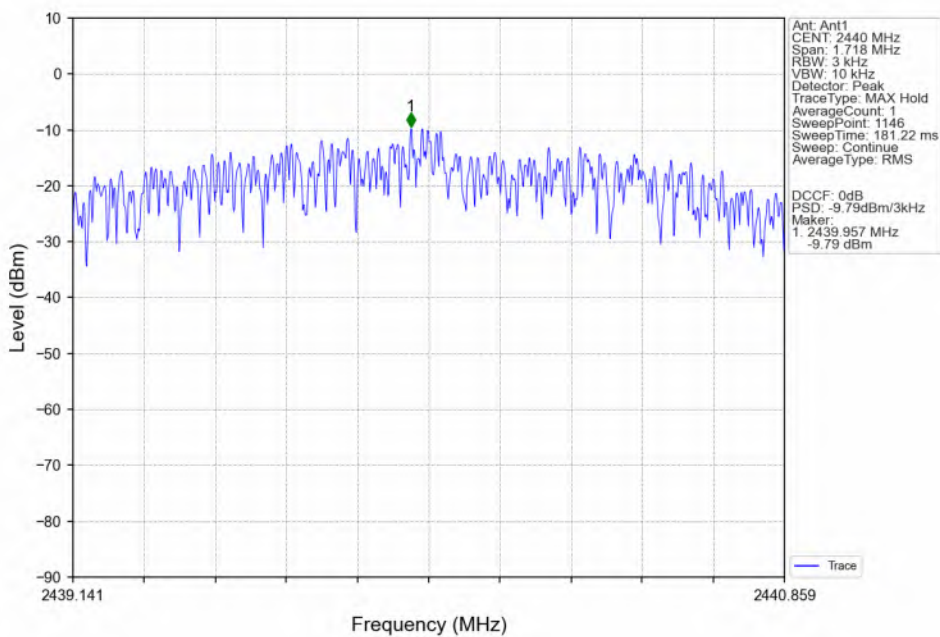

2M_HCH_2480MHz_Ant1_NTNV

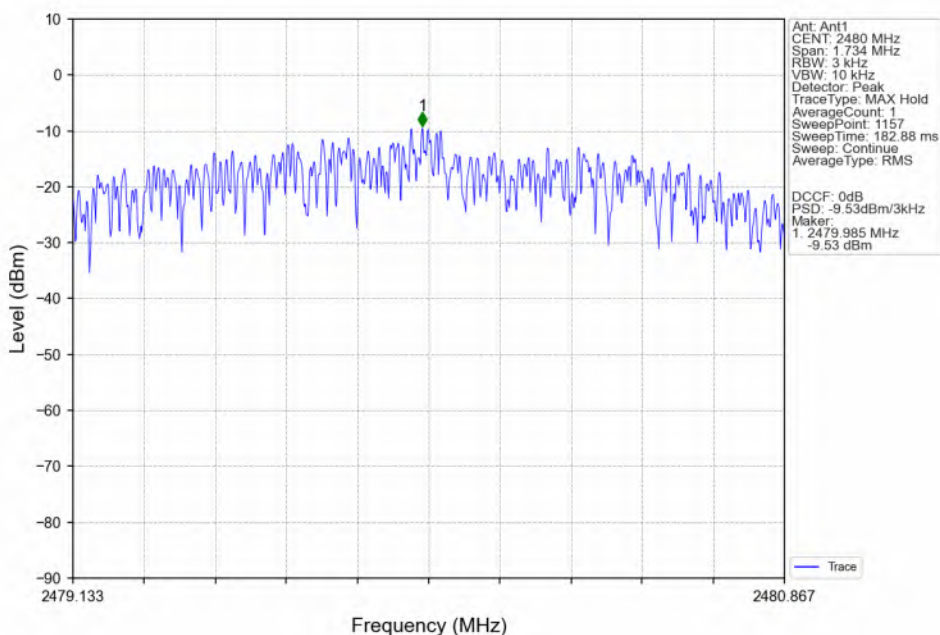

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	7.67
		2440	1	8.23
		2480	1	8.44
2M	SISO	2402	1	7.75
		2440	1	8.30
		2480	1	8.56

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	8.44	-11.56	Pass
		2440	1	8.44	-11.56	Pass
		2480	1	8.44	-11.56	Pass
2M	SISO	2402	1	8.56	-11.44	Pass
		2440	1	8.56	-11.44	Pass
		2480	1	8.56	-11.44	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.2 Test Graph


5.2.1 Ref

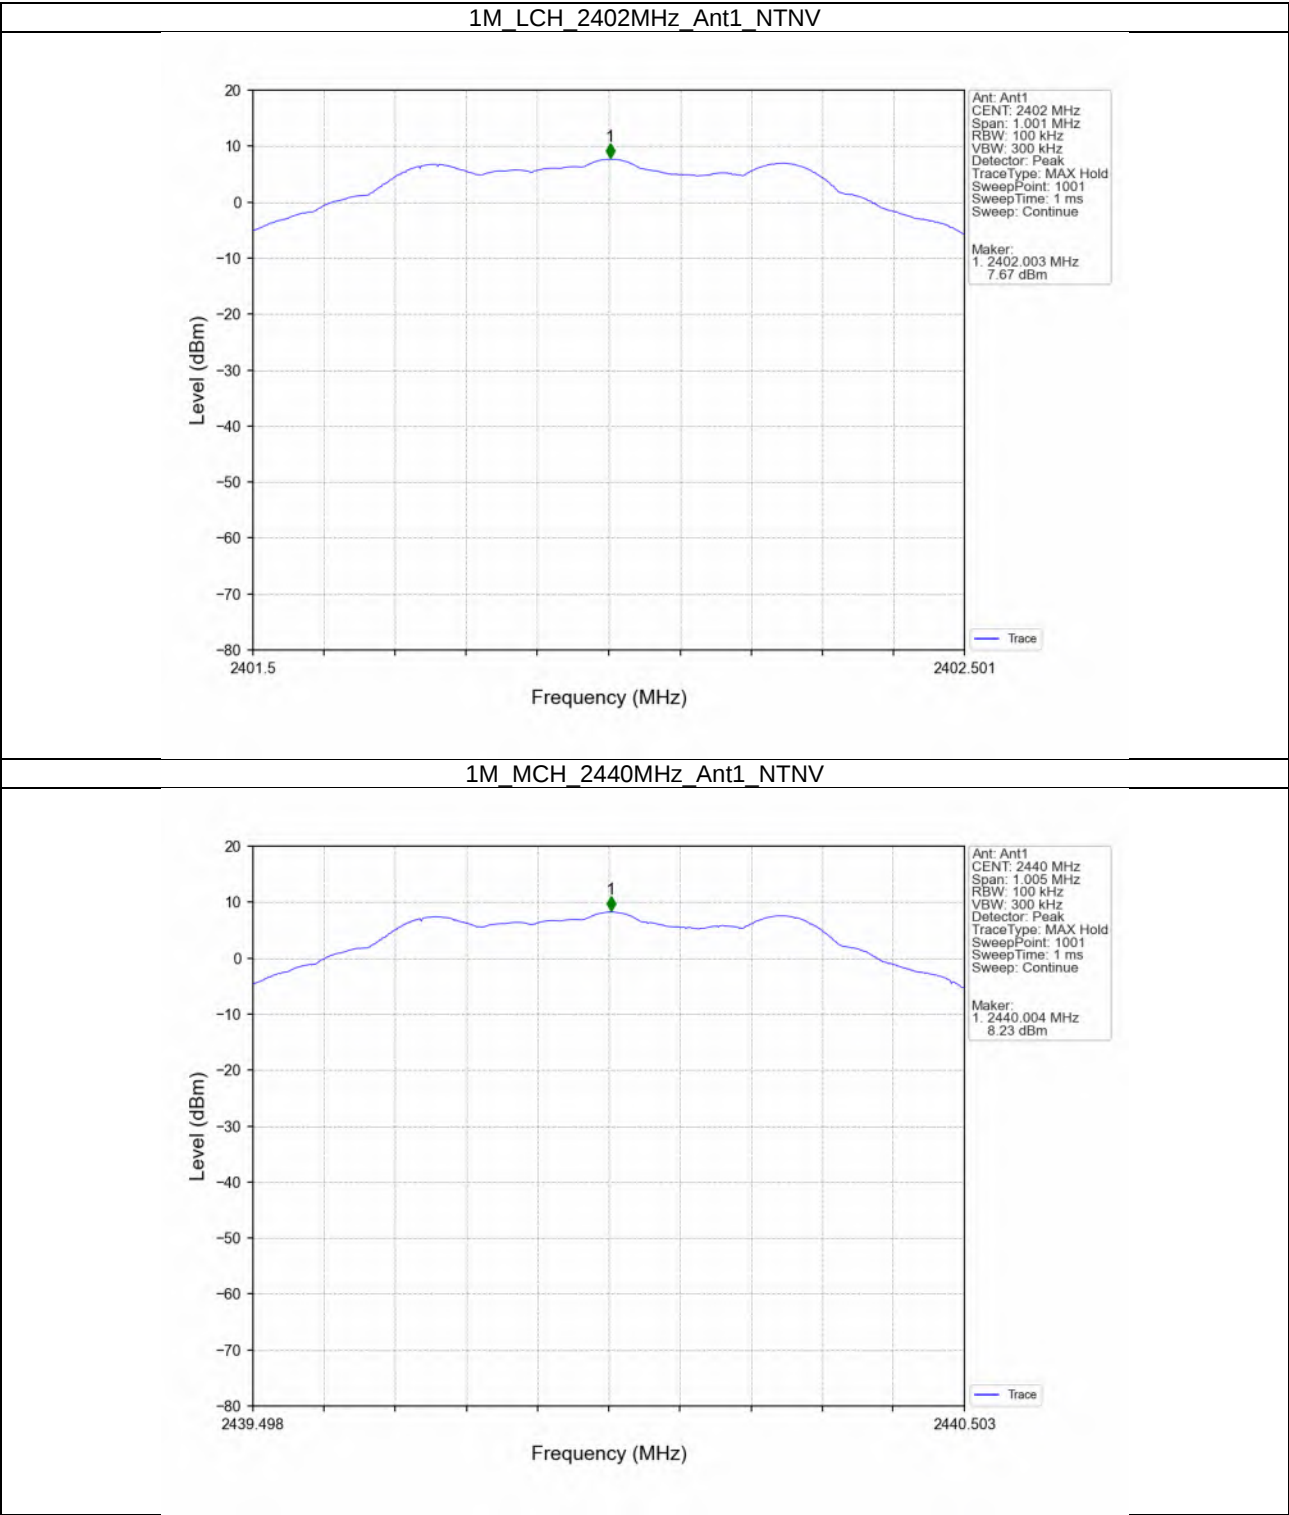

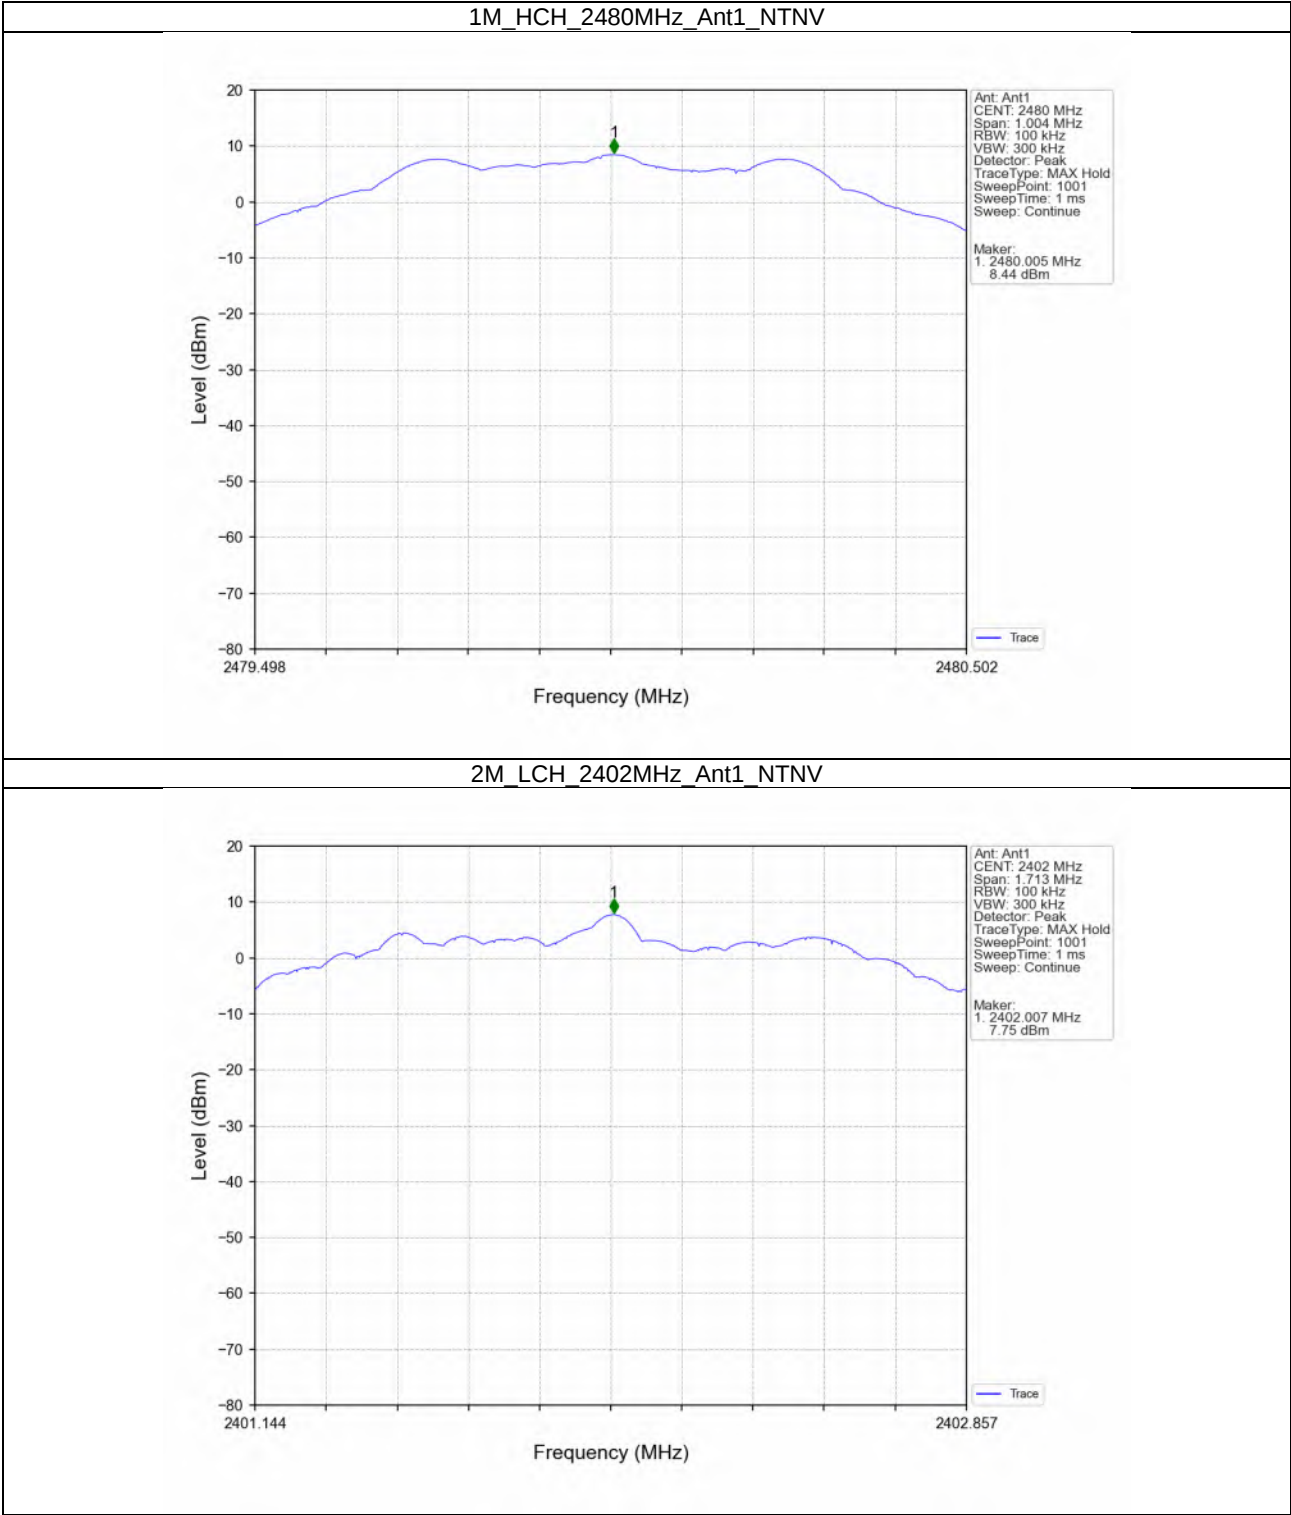


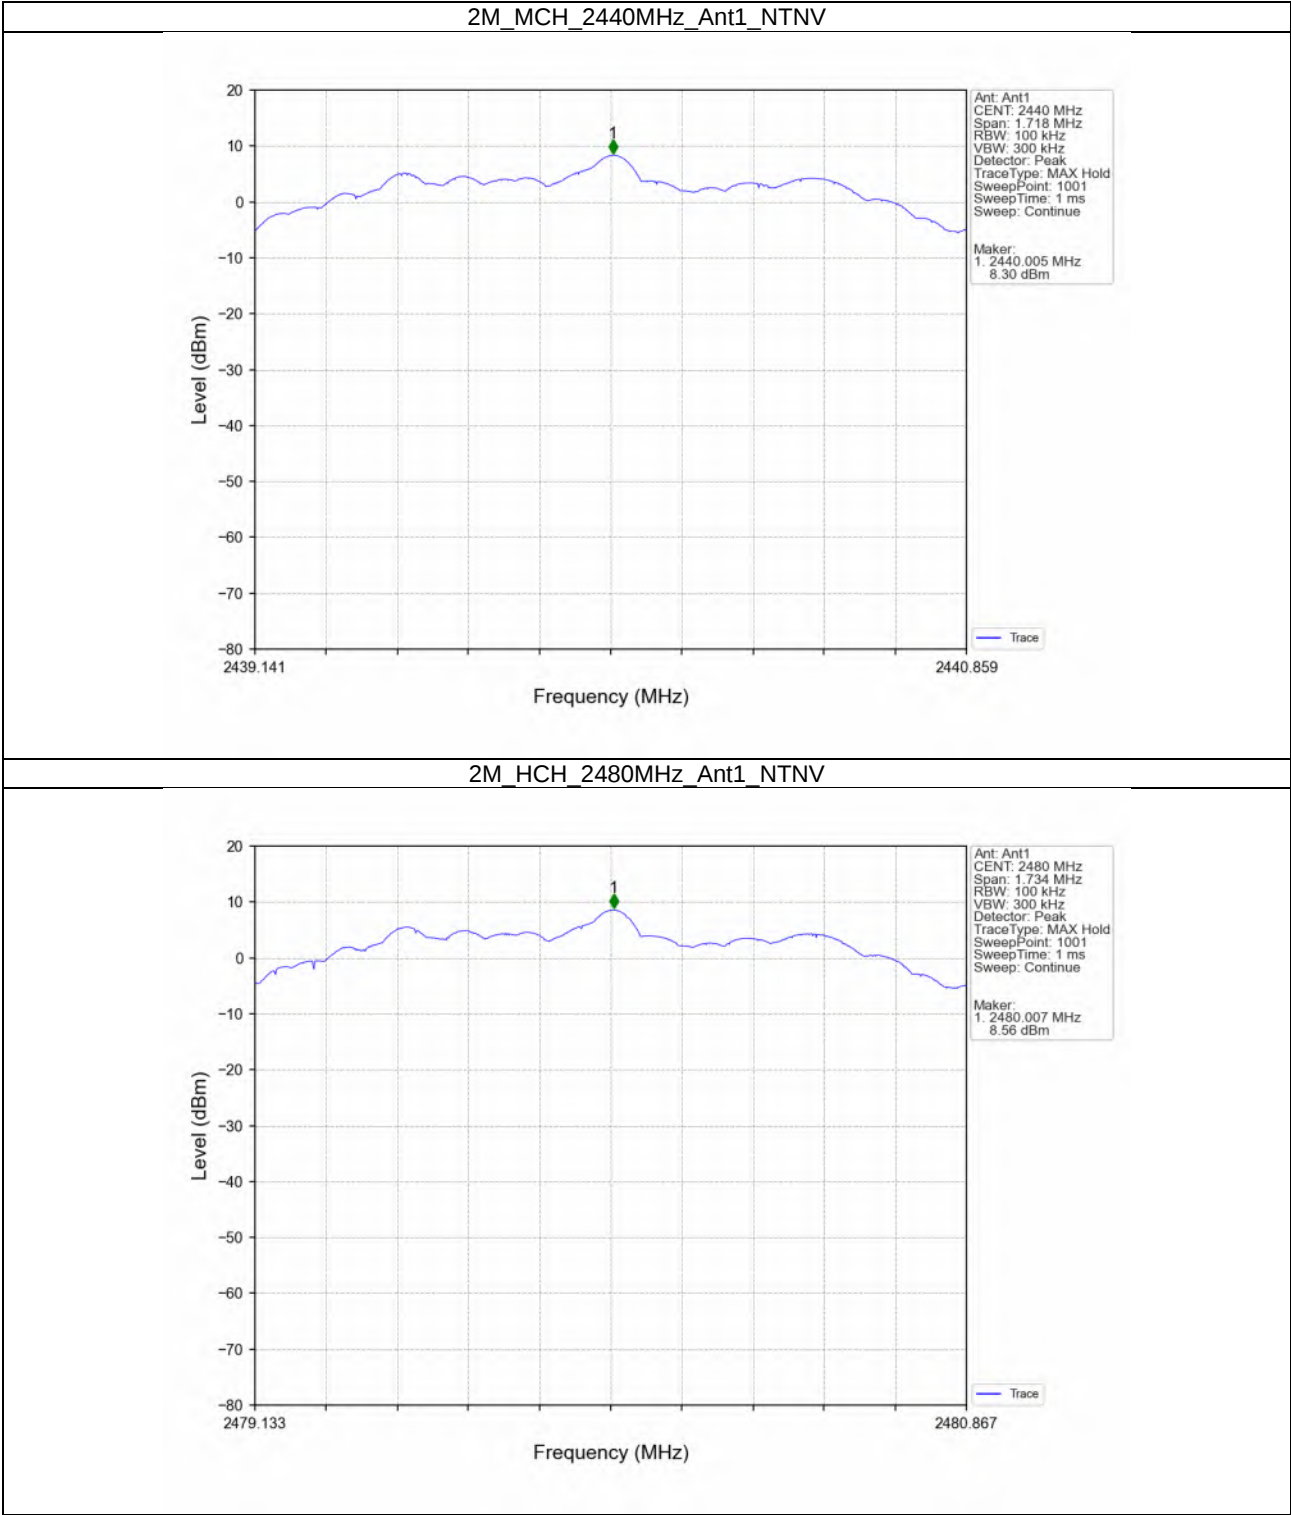


5.2.2 CSE

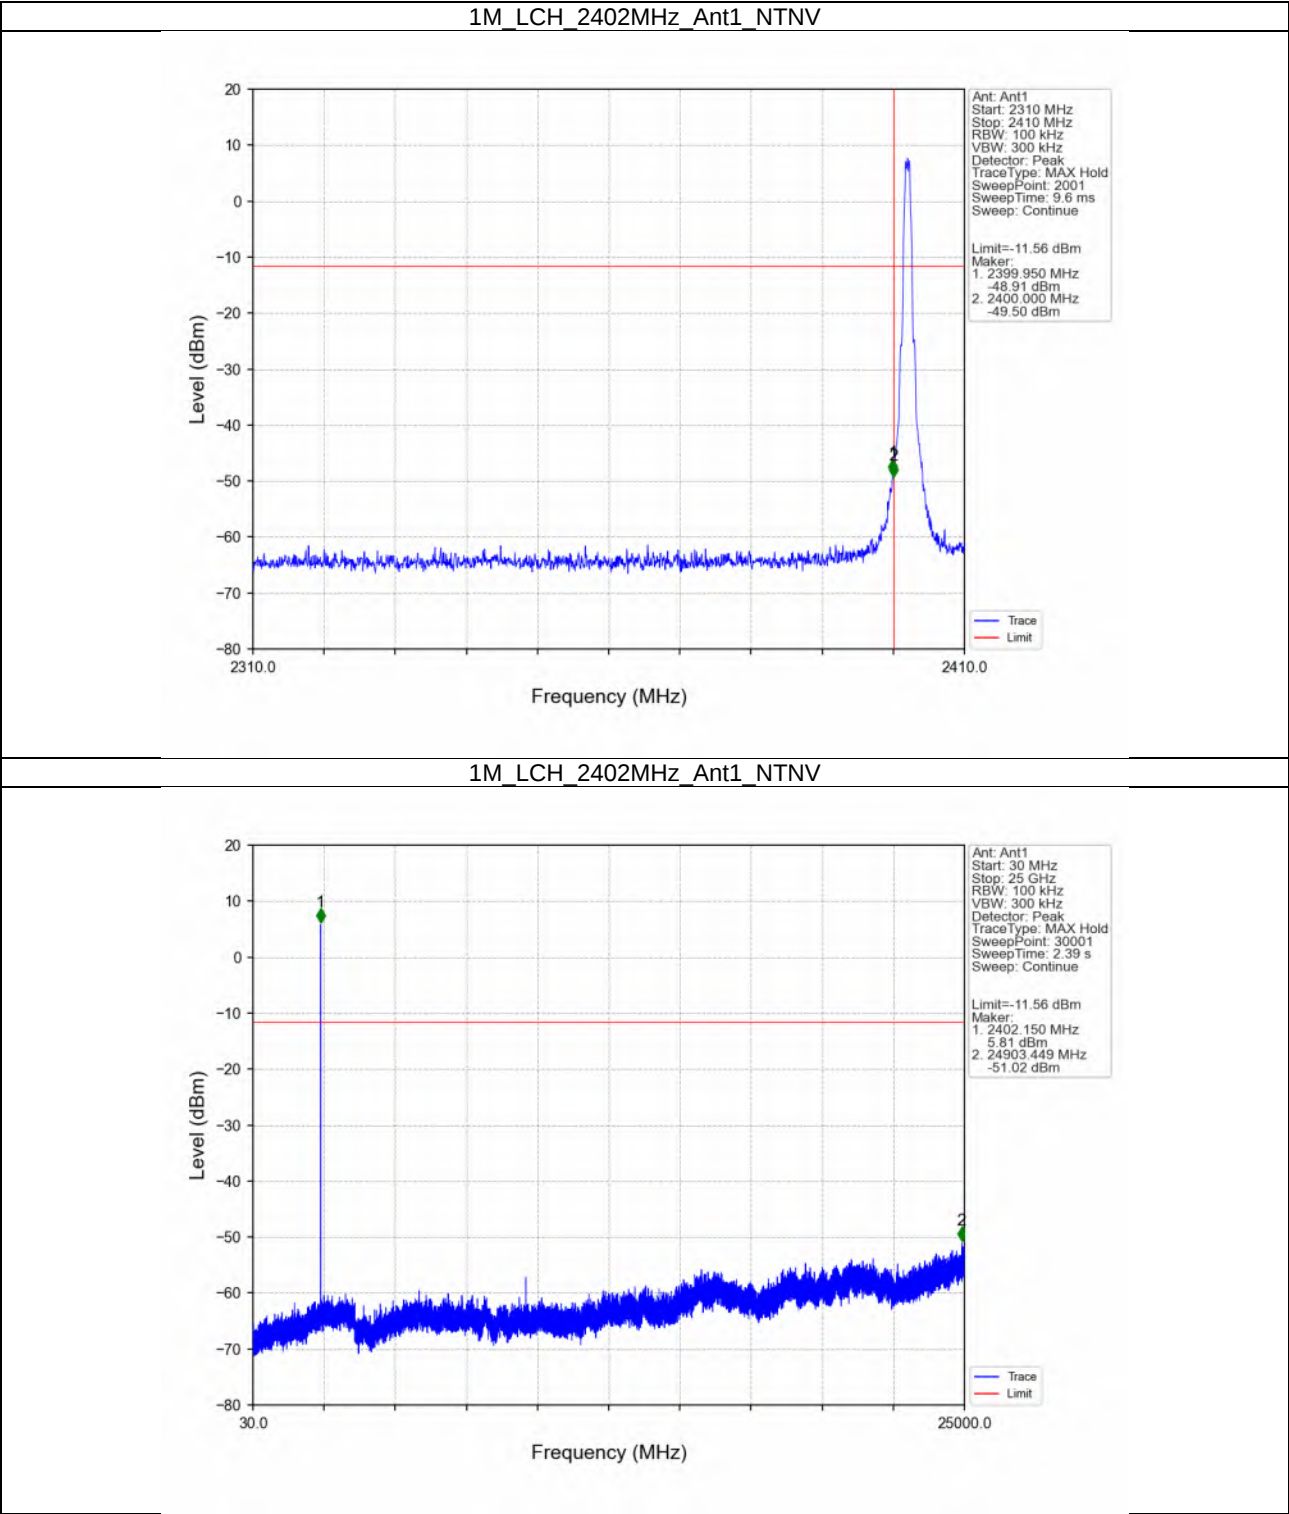


1M_MCH_2440MHz_Ant1_NTNV

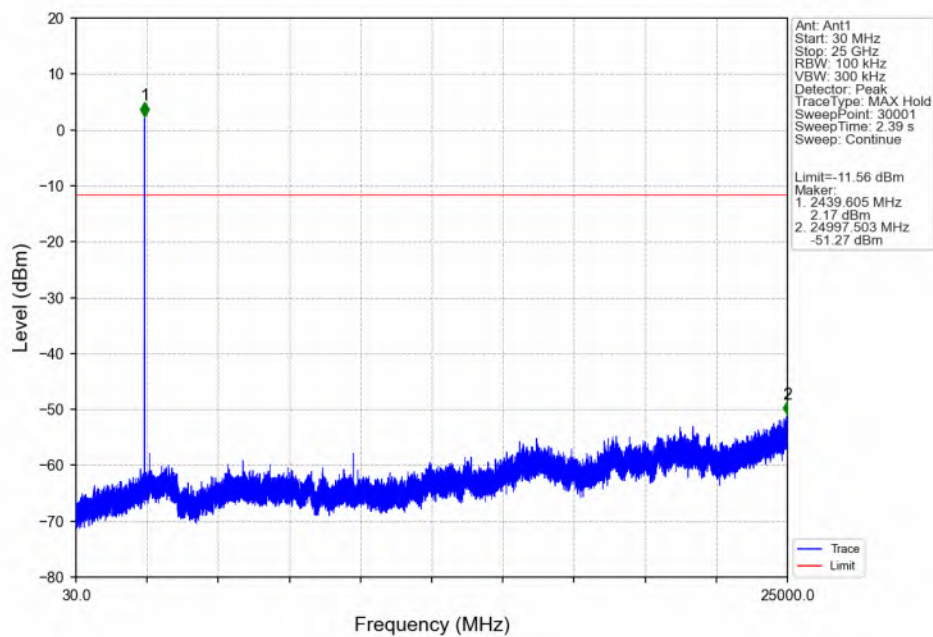


1M_HCH_2480MHz_Ant1_NTNV

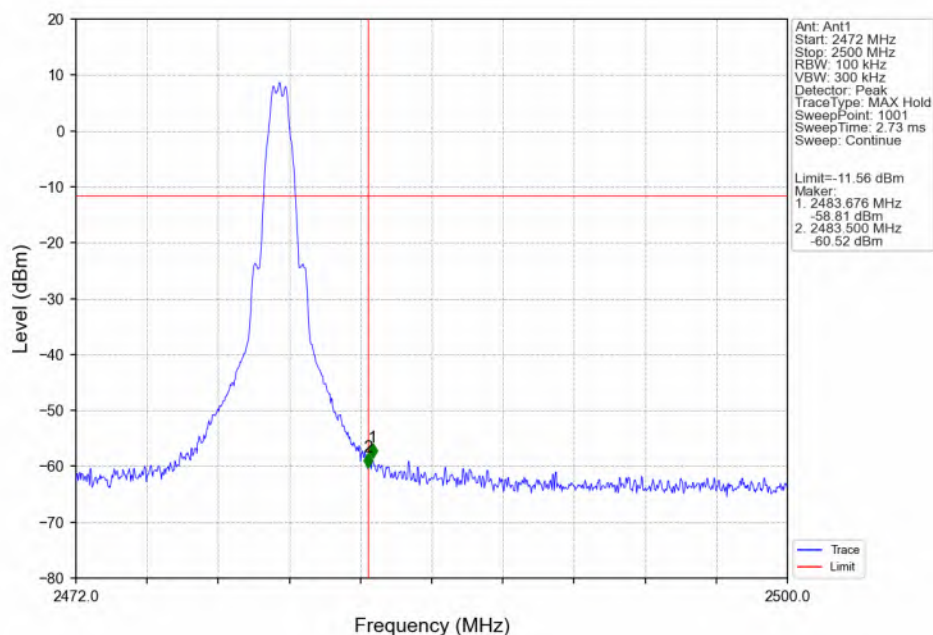


1M_HCH_2480MHz_Ant1_NTNV

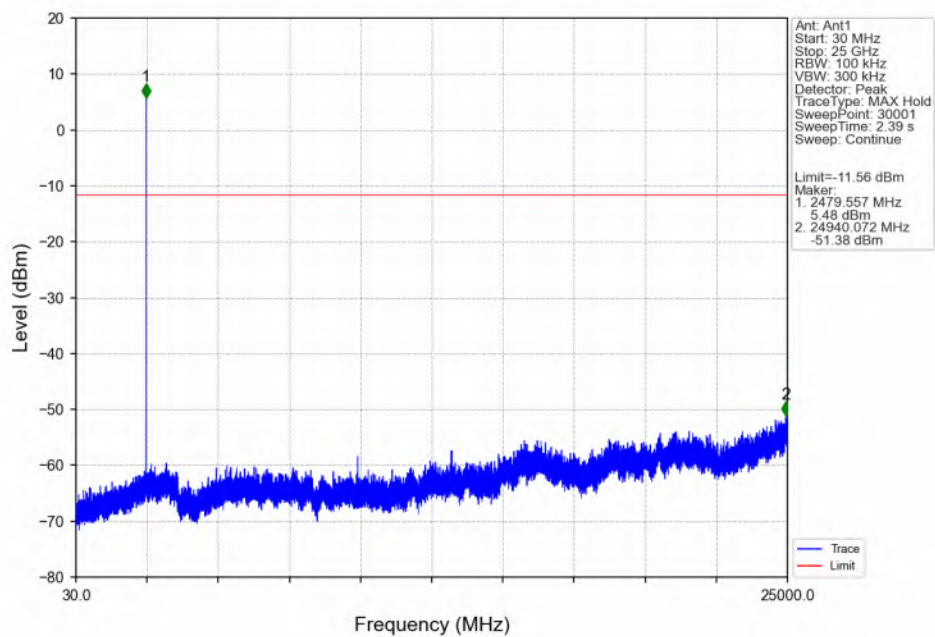


2M_LCH_2402MHz_Ant1_NTNV

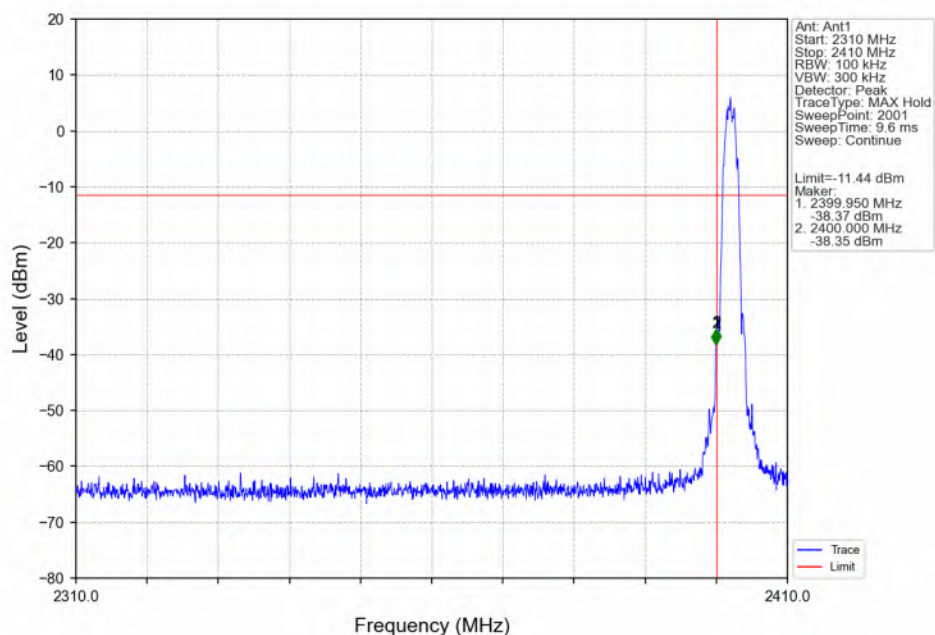


2M_LCH_2402MHz_Ant1_NTNV

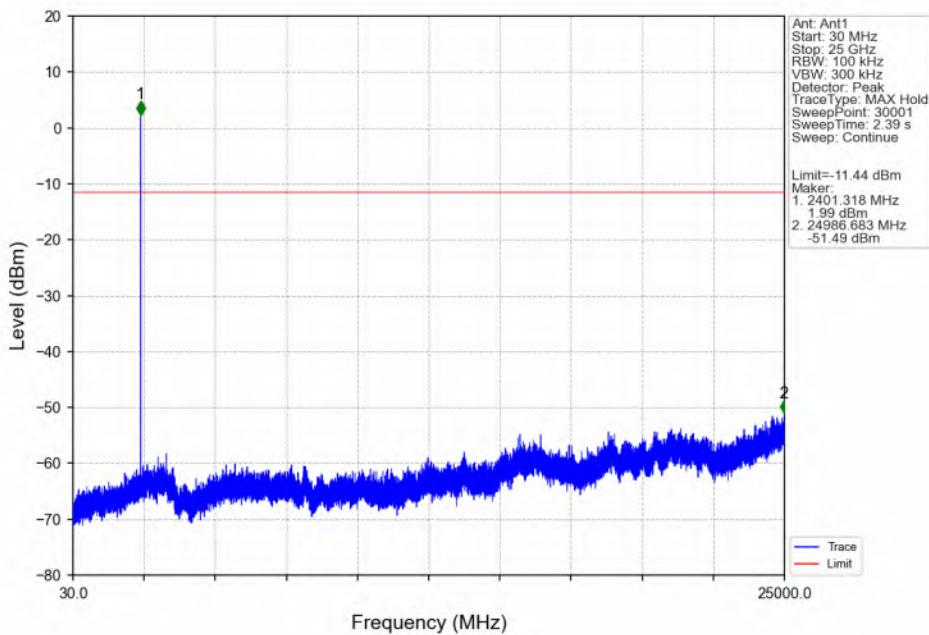


2M_MCH_2440MHz_Ant1_NTNV

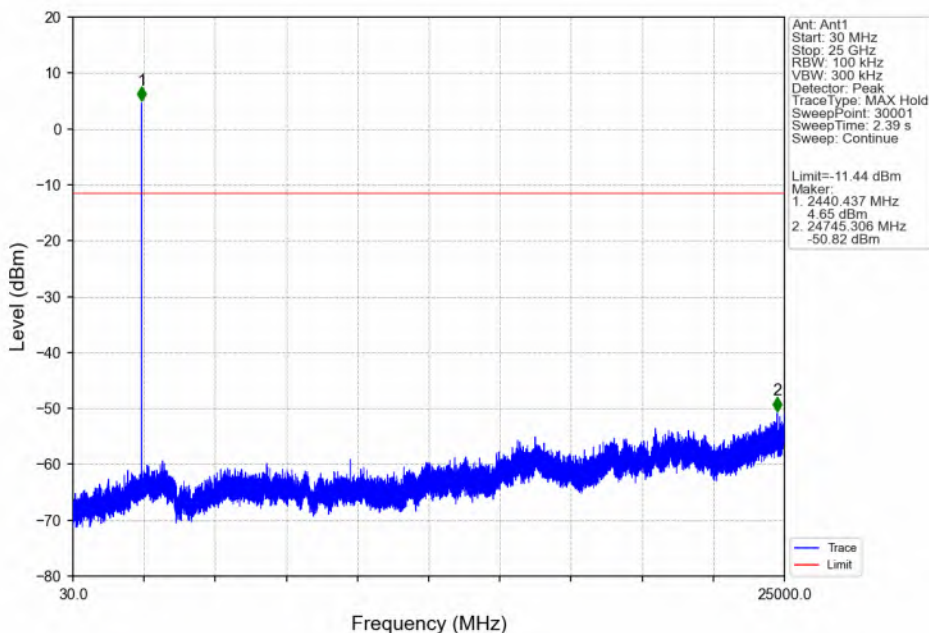

2M_HCH_2480MHz_Ant1_NTNV

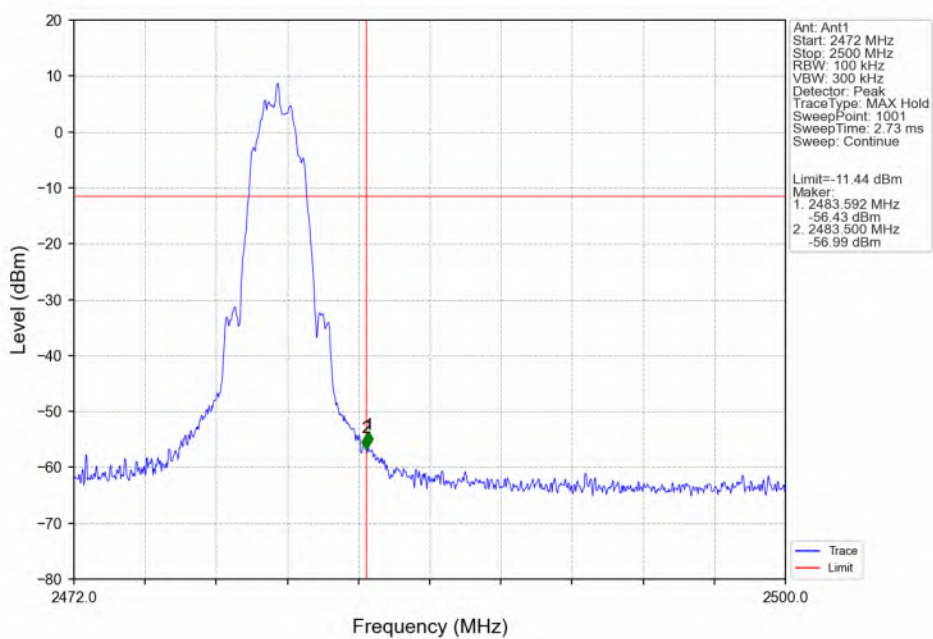


2M_HCH_2480MHz_Ant1_NTNV

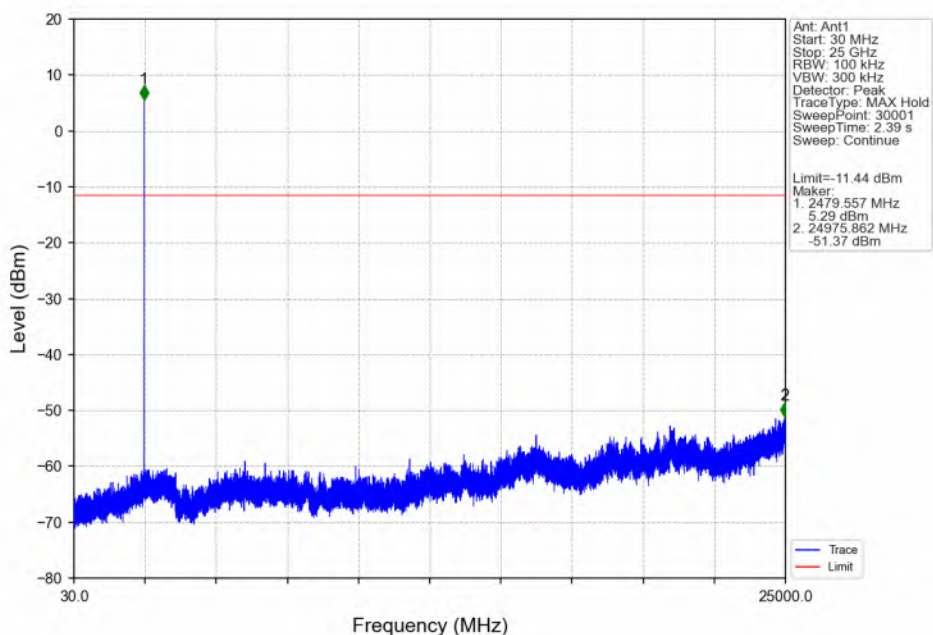


Radiated Spurious Emissions

Radiated emission below 1GHz

Worst case Mode: BLE 1M_Channel 39

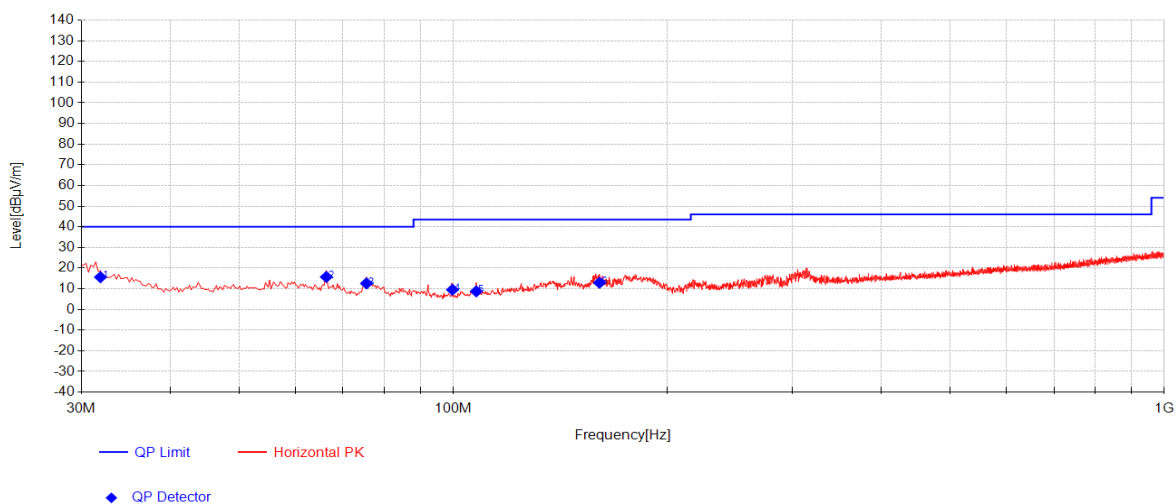


Final Data List										
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.94	37.01	12.62	-34.00	15.63	40.00	24.37	154	153	Horizontal
2	66.375	38.24	10.96	-33.47	15.73	40.00	24.27	138	112	Horizontal
3	75.59	36.29	9.70	-33.38	12.61	40.00	27.39	187	81	Horizontal
4	99.84	33.47	9.20	-33.13	9.54	43.50	33.96	155	153	Horizontal
5	107.8425	31.69	10.10	-33.02	8.77	43.50	34.73	132	338	Horizontal
6	160.7075	32.74	12.73	-32.55	12.92	43.50	30.58	174	279	Horizontal

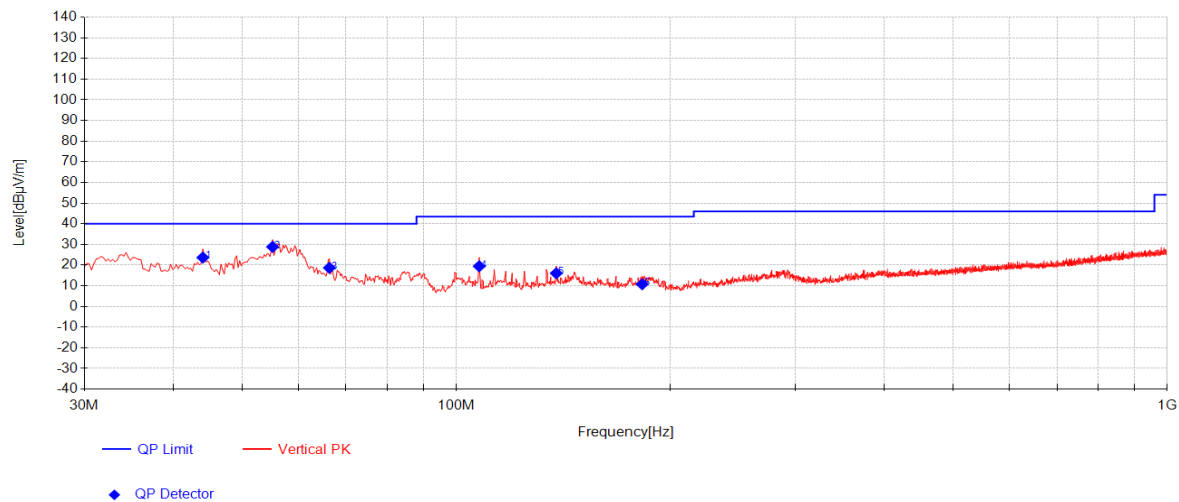


Final Data List										
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.065	44.12	13.32	-33.79	23.65	40.00	16.35	111	22	Vertical
2	55.22	49.57	12.87	-33.62	28.82	40.00	11.18	169	22	Vertical
3	66.375	41.21	10.96	-33.47	18.70	40.00	21.30	184	218	Vertical
4	107.8425	42.38	10.10	-33.02	19.46	43.50	24.04	127	22	Vertical
5	138.3975	36.24	12.60	-32.78	16.07	43.50	27.43	134	22	Vertical
6	182.775	32.54	10.58	-32.36	10.75	43.50	32.75	156	238	Vertical

Worst case Mode: BLE 2M_Channel 39

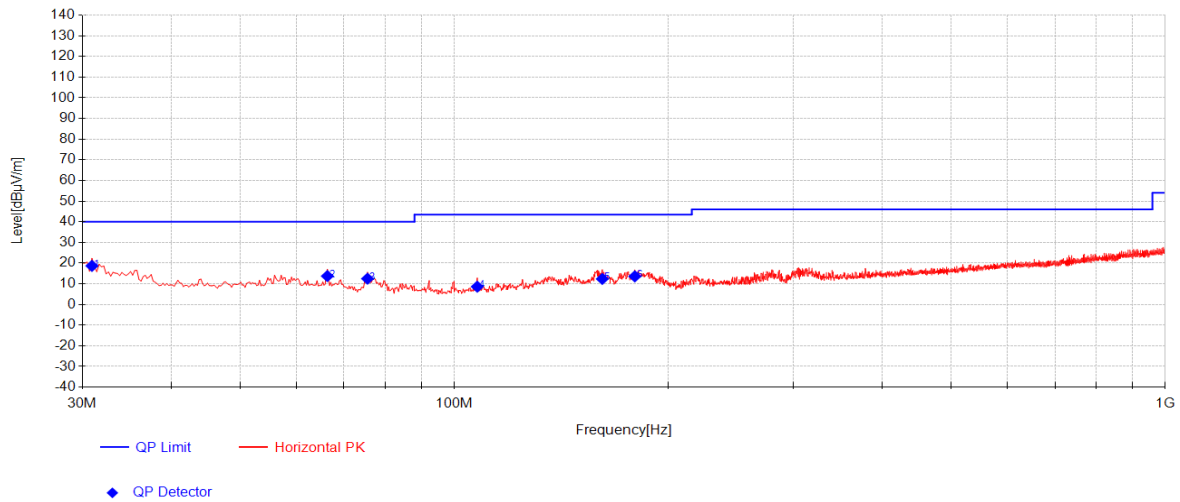

Final Data List										
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.97	40.13	12.56	-34.01	18.67	40.00	21.33	124	194	Horizontal
2	66.375	36.24	10.96	-33.47	13.73	40.00	26.27	154	338	Horizontal
3	75.59	36.17	9.70	-33.38	12.49	40.00	27.51	136	7	Horizontal
4	107.8425	31.52	10.10	-33.02	8.60	43.50	34.90	187	338	Horizontal
5	161.6775	32.27	12.62	-32.53	12.36	43.50	31.14	174	257	Horizontal
6	179.6225	35.24	10.74	-32.38	13.60	43.50	29.90	143	257	Horizontal

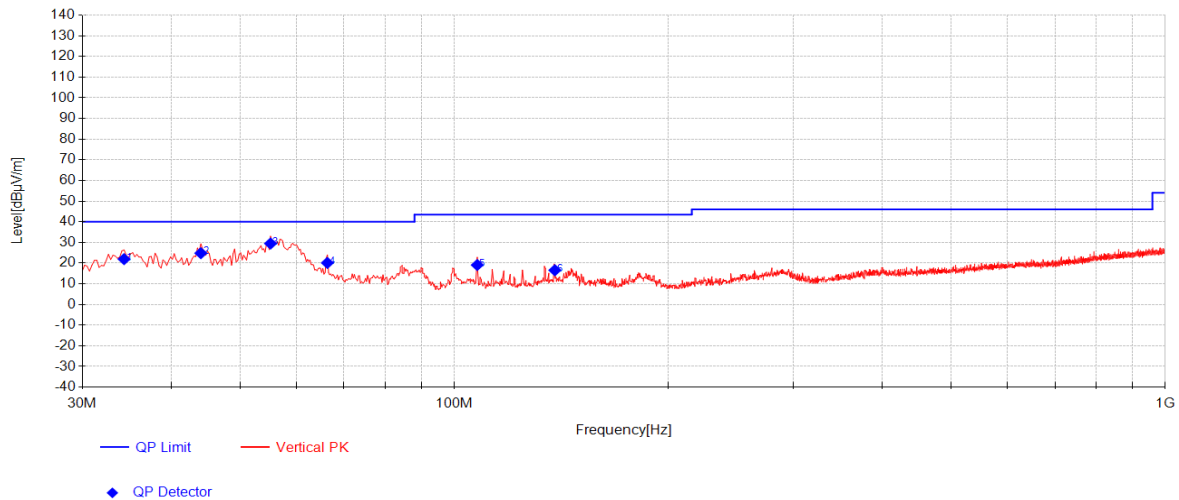

Final Data List										
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.365	43.12	12.76	-33.96	21.93	40.00	18.07	154	235	Vertical
2	44.065	45.28	13.32	-33.79	24.81	40.00	15.19	135	126	Vertical
3	55.22	50.24	12.87	-33.62	29.49	40.00	10.51	169	95	Vertical
4	66.375	42.61	10.96	-33.47	20.10	40.00	19.90	187	235	Vertical
5	107.8425	42.01	10.10	-33.02	19.09	43.50	24.41	154	287	Vertical
6	138.64	36.74	12.62	-32.78	16.58	43.50	26.92	133	345	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

$$\text{Value} = \text{Reading}(\text{dB}\mu\text{V}) + \text{AF}(\text{dB}/\text{m}) + \text{Factor}(\text{dB})$$


$$\text{AF} = \text{Antenna Factor}(\text{dB}/\text{m})$$

$$\text{Factor} = \text{Cable Factor}(\text{dB}) - \text{Preamplifier gain}(\text{dB})$$

$$\text{Margin} = \text{Limit}(\text{dB}\mu\text{V}/\text{m}) - \text{Value}(\text{dB}\mu\text{V}/\text{m})$$
- All channels have been tested, but only the worst case data displayed in this report.


Transmitter emission Above 1GHz

BLE 1M_Channel 00

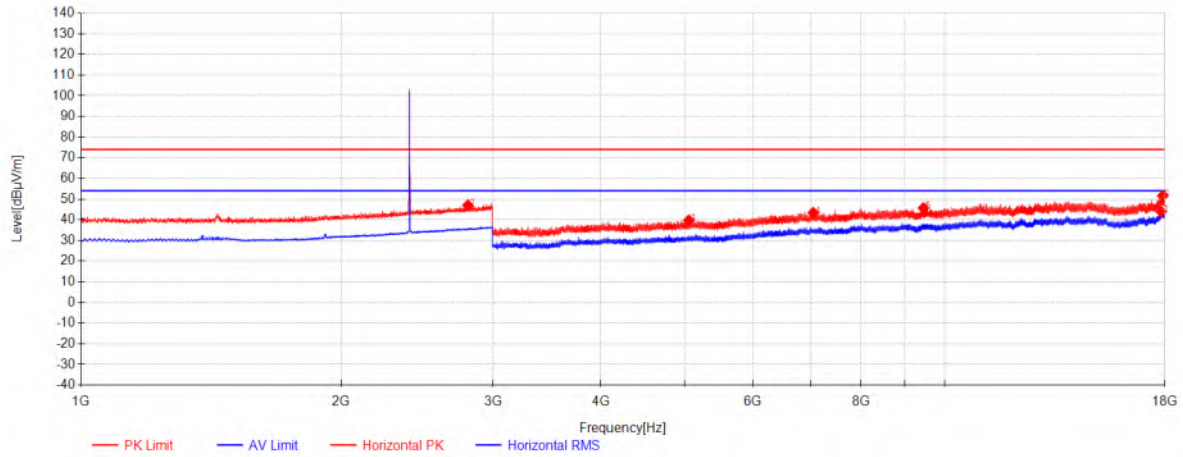

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17817	33.36	41.17	-30.60	43.93	54.00	10.07	Horizontal
2	2804.5	42.29	28.82	-24.09	47.02	74.00	26.98	Horizontal
3	5055	51.60	33.09	-44.91	39.78	74.00	34.22	Horizontal
4	7044.375	50.09	36.30	-42.95	43.44	74.00	30.56	Horizontal
5	9447.75	46.38	38.04	-38.75	45.68	74.00	28.32	Horizontal
6	17887.875	41.26	41.37	-31.03	51.60	74.00	22.40	Horizontal


BLE 1M_Channel 00

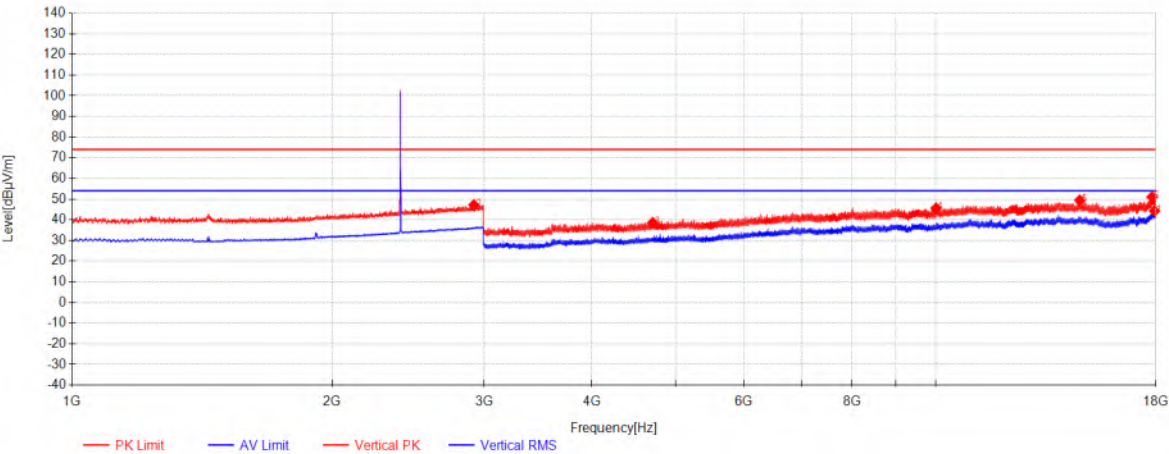

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17930.25	33.88	41.50	-31.08	44.29	54.00	9.71	Vertical
2	2919	41.33	29.28	-23.51	47.10	74.00	26.90	Vertical
3	4702.5	51.01	32.39	-44.84	38.56	74.00	35.44	Vertical
4	10012.5	45.04	38.12	-37.55	45.60	74.00	28.40	Vertical
5	14685.75	43.02	39.99	-33.58	49.43	74.00	24.57	Vertical
6	17807.625	40.42	41.14	-30.54	51.02	74.00	22.98	Vertical


BLE 1M_Channel 19

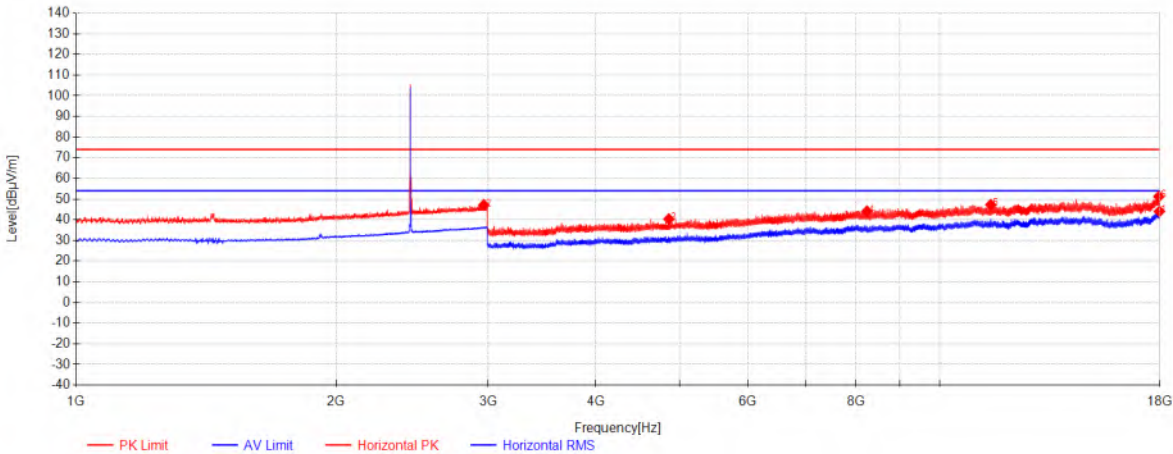

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17969.625	33.51	41.61	-31.05	44.07	54.00	9.93	Horizontal
2	2966	41.16	29.46	-23.48	47.14	74.00	26.86	Horizontal
3	4857.75	52.54	32.76	-44.97	40.32	74.00	33.68	Horizontal
4	8239.5	47.38	37.47	-40.72	44.13	74.00	29.87	Horizontal
5	11460.375	44.29	39.02	-36.08	47.24	74.00	26.76	Horizontal
6	17941.875	40.77	41.53	-31.07	51.23	74.00	22.77	Horizontal


BLE 1M_Channel 19

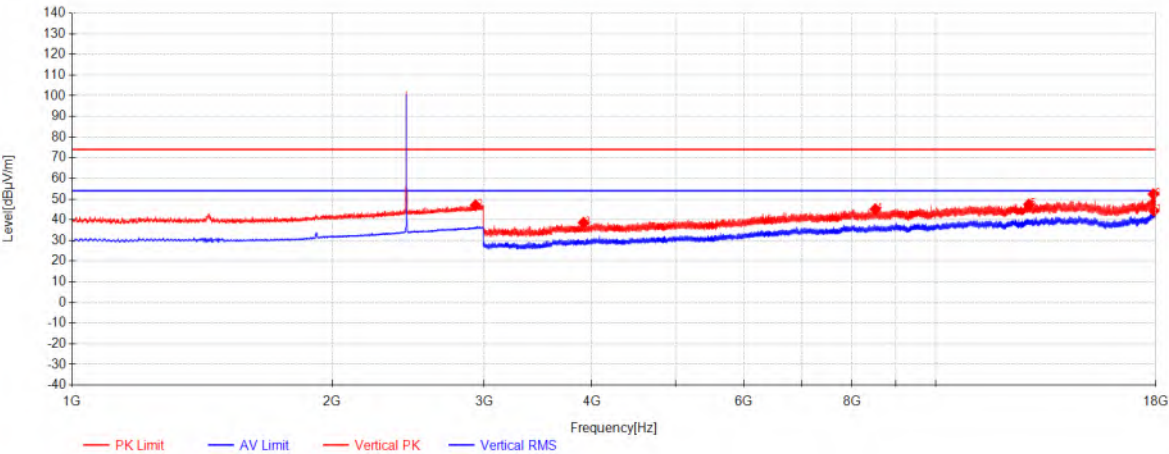

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17898.375	34.07	41.41	-31.10	44.38	54.00	9.62	Vertical
2	2932	41.21	29.33	-23.50	47.04	74.00	26.96	Vertical
3	3910.125	52.75	30.78	-44.94	38.59	74.00	35.41	Vertical
4	8514.375	47.86	37.66	-40.37	45.15	74.00	28.85	Vertical
5	12822	42.65	39.69	-34.88	47.46	74.00	26.54	Vertical
6	17873.25	42.04	41.33	-30.94	52.43	74.00	21.57	Vertical


BLE 1M_Channel 39

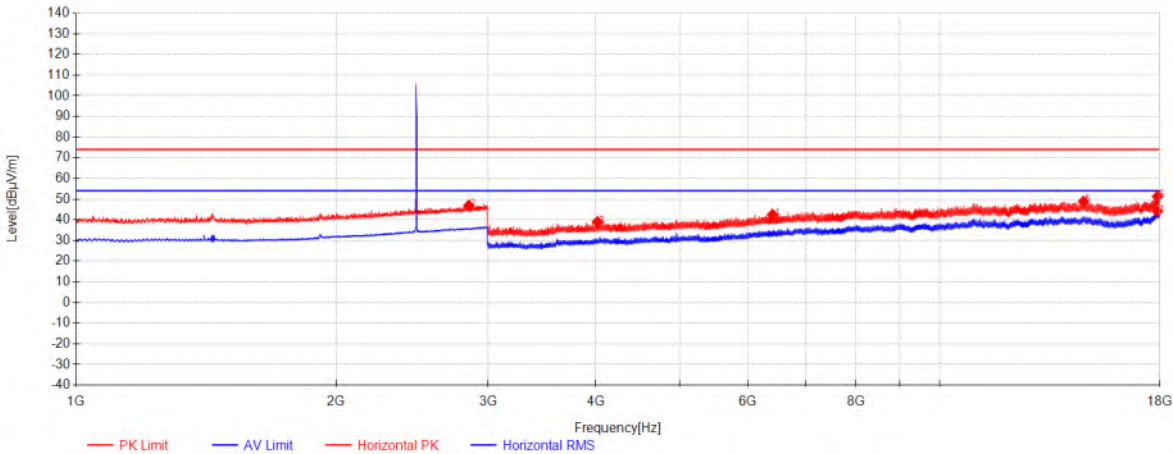

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17866.125	33.77	41.31	-30.90	44.18	54.00	9.82	Horizontal
2	2849.5	41.71	29.00	-23.82	46.89	74.00	27.11	Horizontal
3	4015.125	53.02	31.12	-45.16	38.98	74.00	35.02	Horizontal
4	6403.5	50.58	35.31	-43.43	42.46	74.00	31.54	Horizontal
5	14677.875	42.60	39.99	-33.69	48.90	74.00	25.10	Horizontal
6	17876.25	40.97	41.34	-30.96	51.35	74.00	22.65	Horizontal


BLE 1M_Channel 39

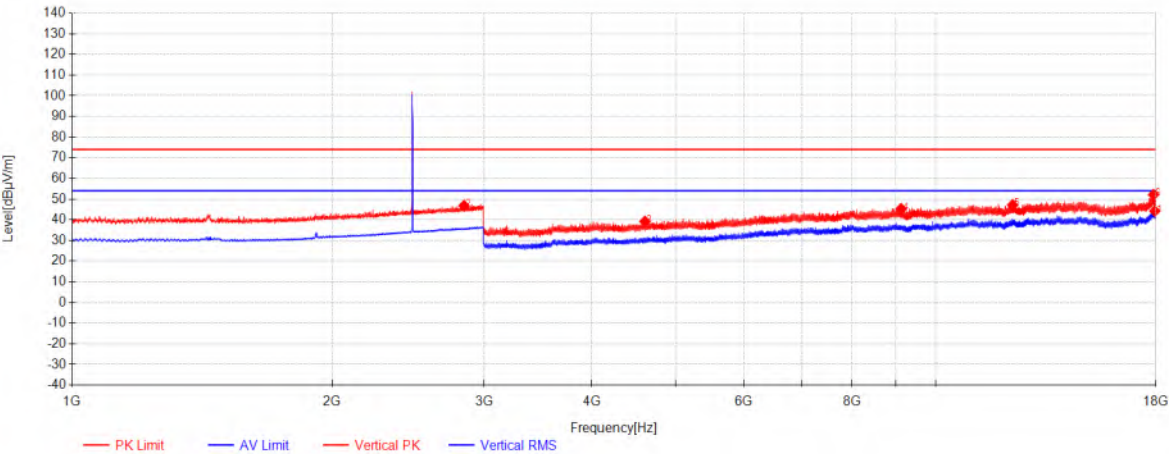

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17939.625	33.80	41.52	-31.07	44.25	54.00	9.75	Vertical
2	2843	41.69	28.97	-23.86	46.80	74.00	27.20	Vertical
3	4606.125	52.06	32.15	-45.06	39.16	74.00	34.84	Vertical
4	9120	46.99	38.01	-39.67	45.33	74.00	28.67	Vertical
5	12279	43.07	39.03	-34.90	47.20	74.00	26.80	Vertical
6	17880.375	41.76	41.35	-30.99	52.12	74.00	21.88	Vertical

BLE 2M_Channel 00

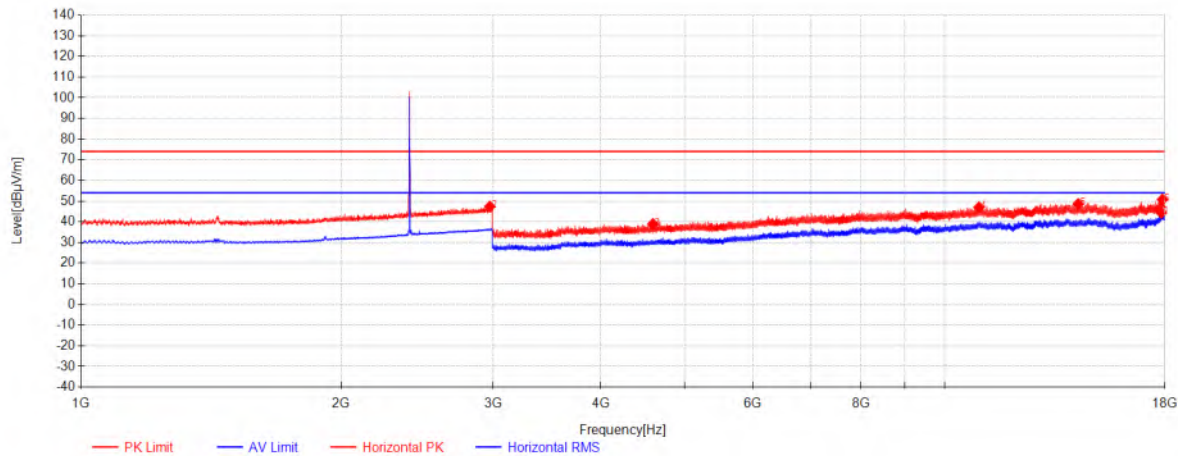

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17824.875	33.78	41.19	-30.64	44.33	54.00	9.67	Horizontal
2	2973.5	41.36	29.49	-23.48	47.38	74.00	26.62	Horizontal
3	4593.75	51.95	32.13	-45.08	38.99	74.00	35.01	Horizontal
4	10959.375	43.99	39.25	-36.22	47.02	74.00	26.98	Horizontal
5	14278.125	43.37	40.23	-34.94	48.66	74.00	25.34	Horizontal
6	17875.125	40.39	41.34	-30.96	50.77	74.00	23.23	Horizontal


BLE 2M_Channel 00

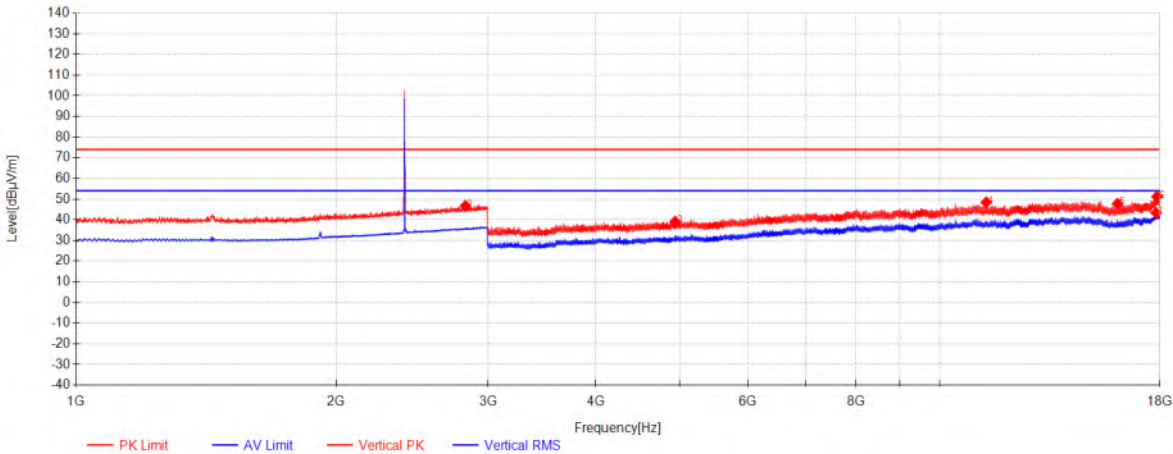

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17813.25	32.79	41.16	-30.57	43.38	54.00	10.62	Vertical
2	2823.5	41.82	28.89	-23.98	46.74	74.00	27.26	Vertical
3	4939.875	50.98	32.96	-44.84	39.09	74.00	34.91	Vertical
4	11323.875	45.29	39.11	-35.97	48.42	74.00	25.58	Vertical
5	16069.5	42.56	38.06	-32.86	47.76	74.00	26.24	Vertical
6	17856.75	40.76	41.28	-30.84	51.20	74.00	22.80	Vertical


BLE 2M_Channel 19

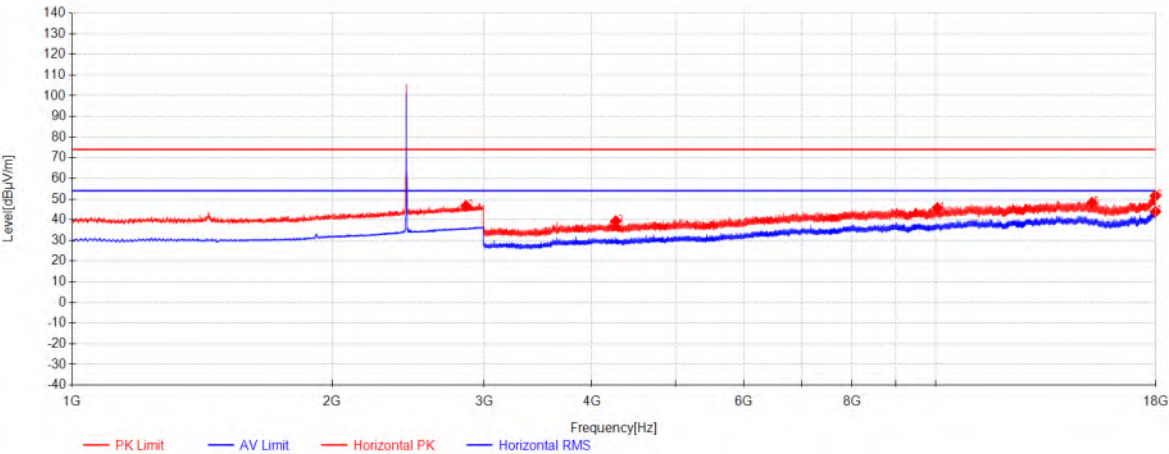

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17971.125	33.38	41.62	-31.05	43.95	54.00	10.05	Horizontal
2	2858.5	41.42	29.03	-23.77	46.69	74.00	27.31	Horizontal
3	4261.5	53.06	31.52	-45.25	39.33	74.00	34.67	Horizontal
4	10045.125	45.03	38.15	-37.54	45.65	74.00	28.35	Horizontal
5	15172.125	42.50	39.49	-33.78	48.21	74.00	25.79	Horizontal
6	17964.375	40.98	41.60	-31.05	51.52	74.00	22.48	Horizontal


BLE 2M_Channel 19

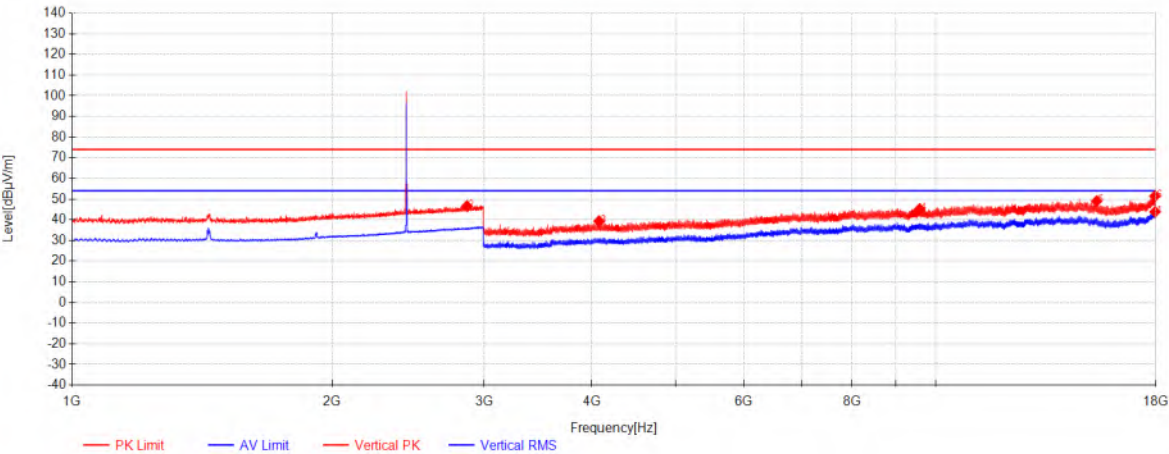

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17952.75	33.38	41.56	-31.06	43.88	54.00	10.12	Vertical
2	2866	41.30	29.06	-23.72	46.64	74.00	27.36	Vertical
3	4075.5	53.22	31.22	-45.09	39.35	74.00	34.65	Vertical
4	9583.125	45.53	38.06	-38.33	45.26	74.00	28.74	Vertical
5	15364.5	43.67	39.14	-33.75	49.06	74.00	24.94	Vertical
6	17944.125	40.96	41.54	-31.07	51.43	74.00	22.57	Vertical

BLE 2M_Channel 39

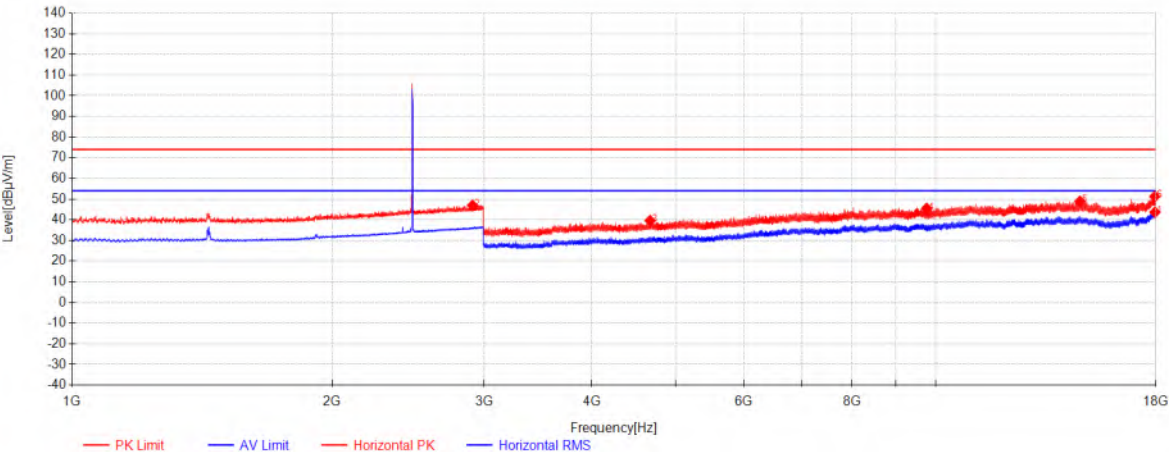

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17950.125	33.20	41.56	-31.06	43.69	54.00	10.31	Horizontal
2	2908.5	41.19	29.23	-23.51	46.91	74.00	27.09	Horizontal
3	4670.625	52.19	32.31	-44.90	39.60	74.00	34.40	Horizontal
4	9765.375	45.28	38.08	-37.86	45.49	74.00	28.51	Horizontal
5	14693.625	42.37	39.98	-33.47	48.88	74.00	25.12	Horizontal
6	17940.75	40.81	41.53	-31.07	51.26	74.00	22.74	Horizontal

BLE 2M_Channel 39

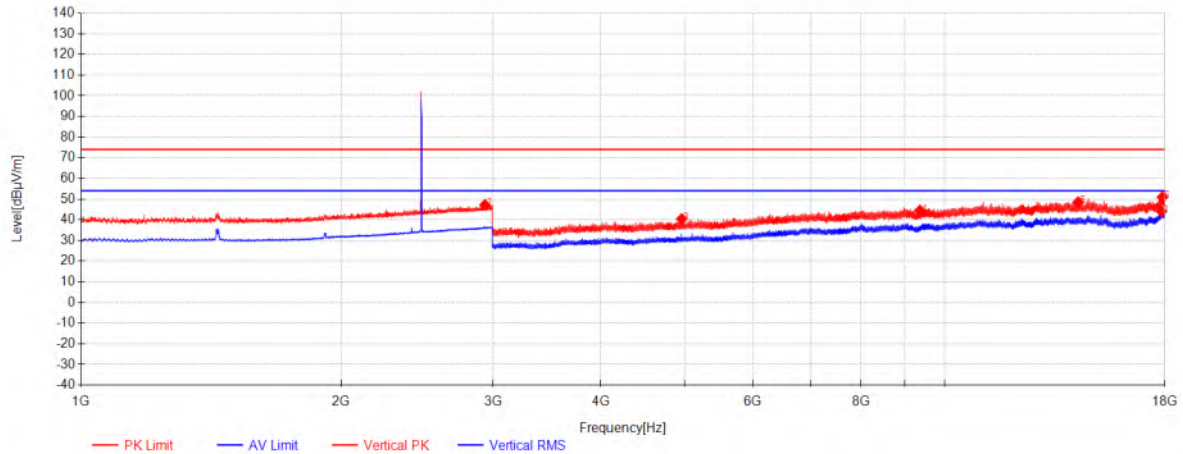

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17831.25	33.56	41.21	-30.68	44.09	54.00	9.91	Vertical
2	2935	41.31	29.34	-23.50	47.15	74.00	26.85	Vertical
3	4960.125	52.23	33.00	-44.85	40.39	74.00	33.61	Vertical
4	9361.875	45.44	38.04	-38.97	44.51	74.00	29.49	Vertical
5	14280.375	43.21	40.23	-34.92	48.52	74.00	25.48	Vertical
6	17871.75	40.53	41.33	-30.93	50.92	74.00	23.08	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

$$\text{Level} = \text{Reading}(\text{dB}\mu\text{V}) + \text{AF}(\text{dB}/\text{m}) + \text{Factor}(\text{dB})$$


$$\text{AF} = \text{Antenna Factor}(\text{dB}/\text{m})$$

$$\text{Factor} = \text{Cable Factor}(\text{dB}) - \text{Preamplifier gain}(\text{dB})$$

$$\text{Margin} = \text{Limit}(\text{dB}\mu\text{V}/\text{m}) - \text{Level}(\text{dB}\mu\text{V}/\text{m})$$
- All channels have been tested, but only the worst case data displayed in this report.
- Both peak and average measured complies with the limit line, so test result is "PASS"


Restricted bands around fundamental frequency

BLE 1M_Channel 00

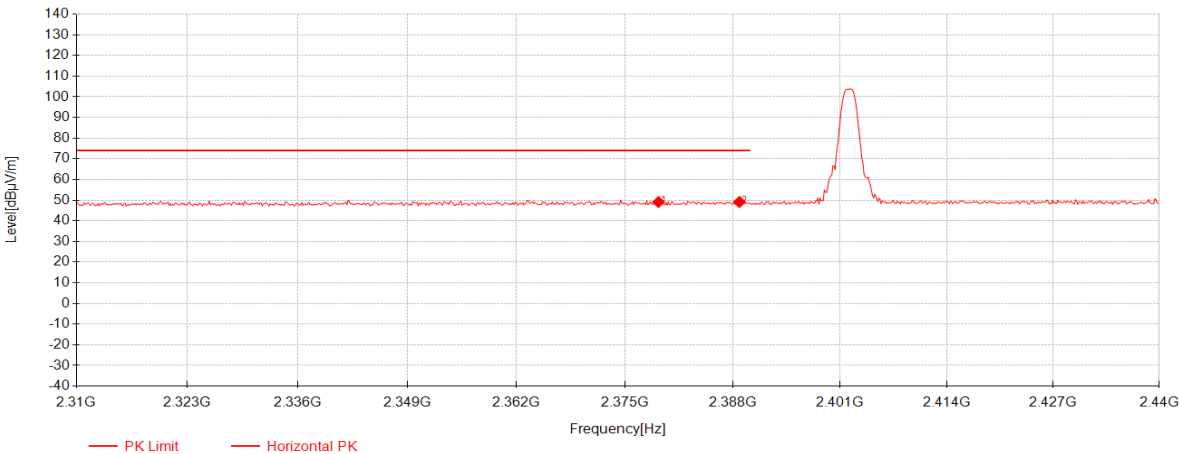


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2379.03	46.64	27.26	-24.82	49.08	74.00	24.92	Horizontal
2	2388.78	46.61	27.29	-24.82	49.08	74.00	24.92	Horizontal

BLE 1M_Channel 00

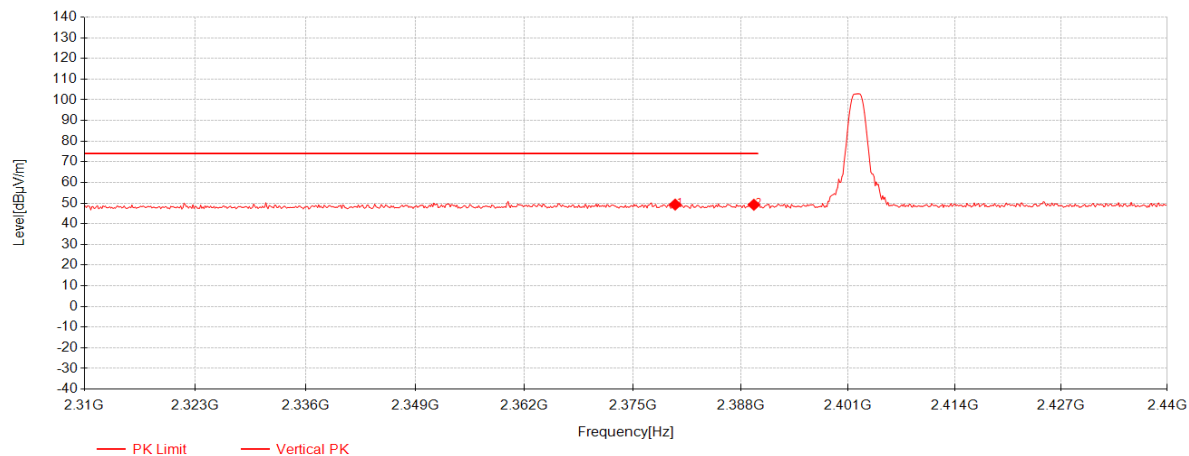


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2380.07	46.85	27.26	-24.82	49.29	74.00	24.71	Vertical
2	2389.56	46.76	27.29	-24.82	49.23	74.00	24.77	Vertical

BLE 1M_Channel 00

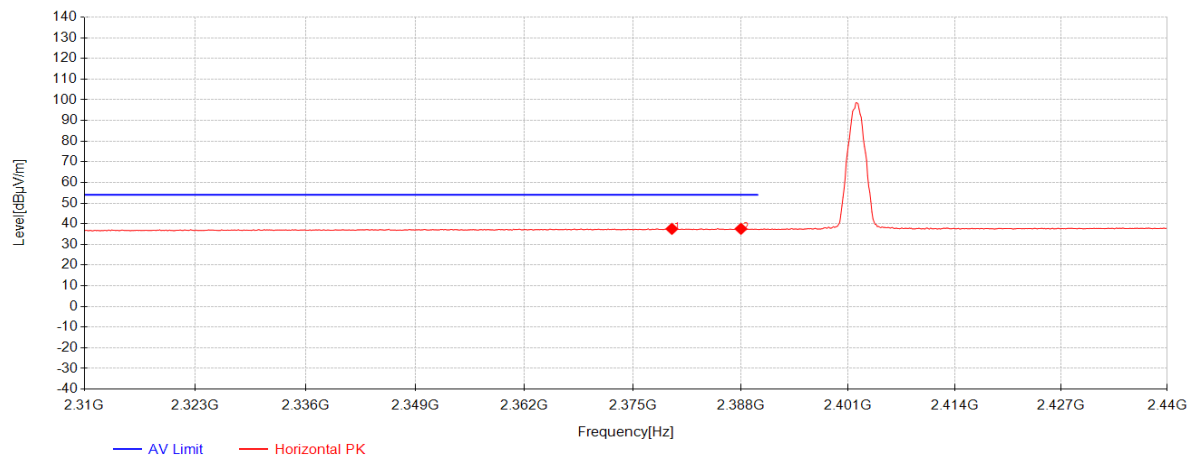


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2379.68	35.10	27.26	-24.82	37.54	54.00	16.46	Horizontal
2	2388	35.10	27.29	-24.82	37.57	54.00	16.43	Horizontal

BLE 1M_Channel 00

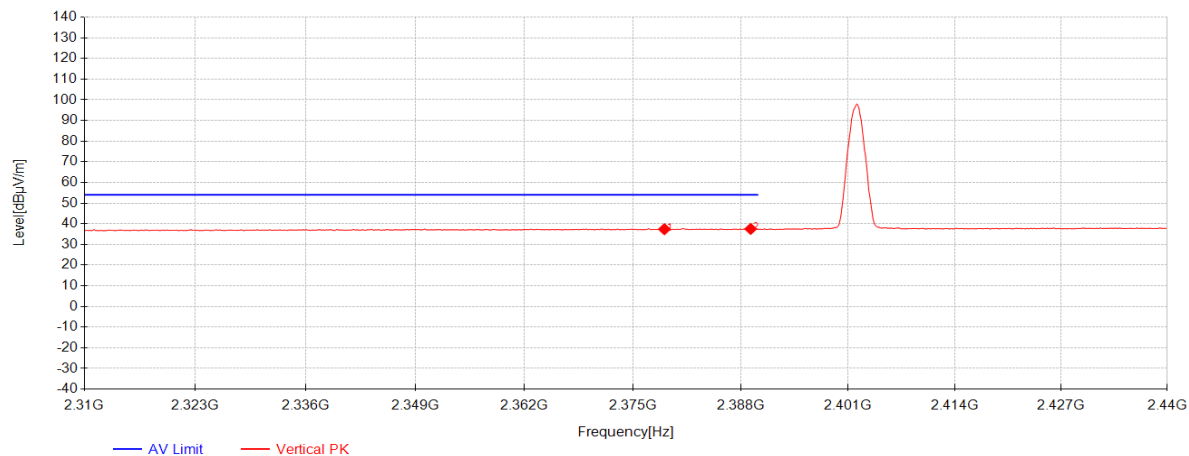


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2378.77	34.95	27.26	-24.82	37.39	54.00	16.61	Vertical
2	2389.17	35.04	27.29	-24.82	37.51	54.00	16.49	Vertical

BLE 1M_Channel 39

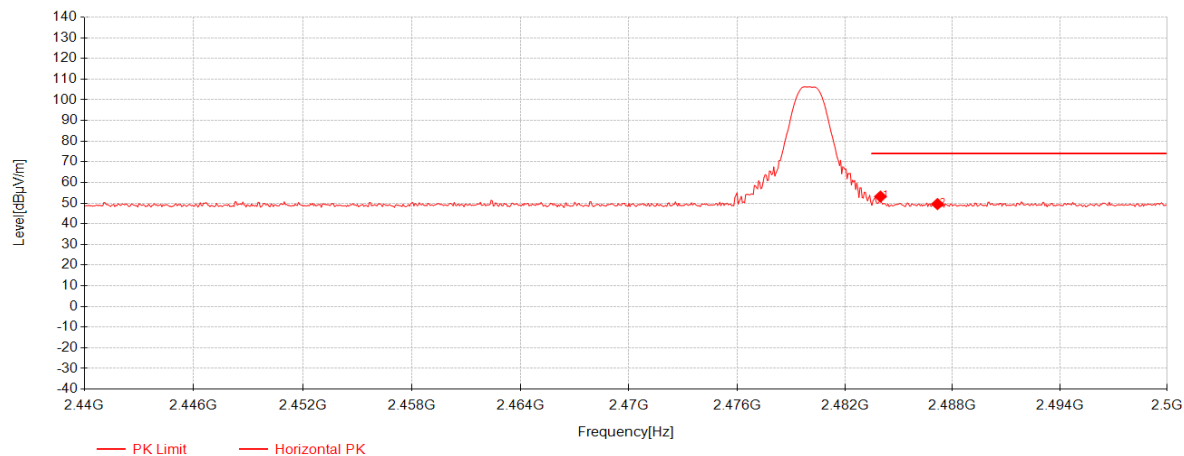


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.98	50.27	27.56	-24.63	53.19	74.00	20.81	Horizontal
2	2487.16	46.61	27.56	-24.63	49.55	74.00	24.45	Horizontal

BLE 1M_Channel 39

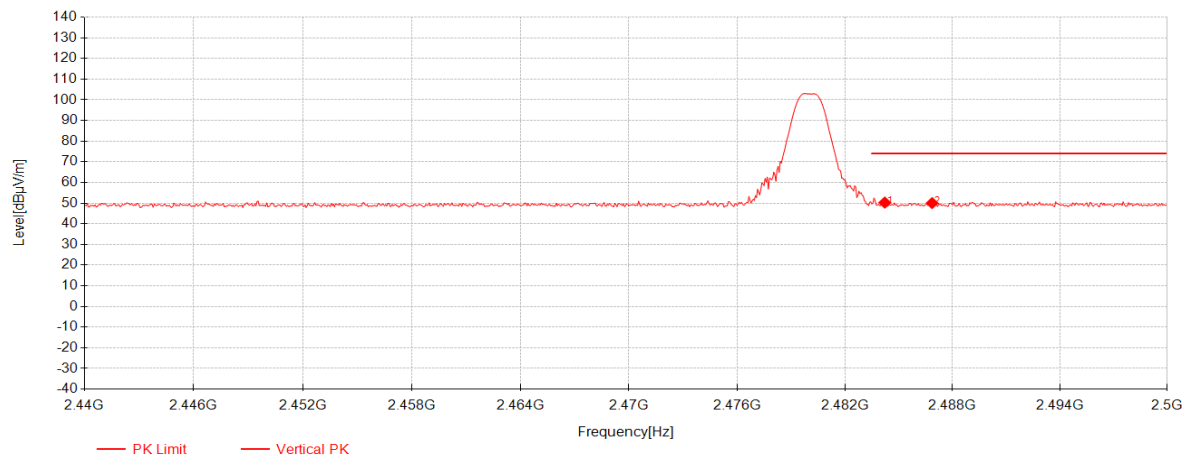


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.22	47.33	27.56	-24.63	50.25	74.00	23.75	Vertical
2	2486.86	47.08	27.56	-24.63	50.02	74.00	23.98	Vertical

BLE 1M_Channel 39

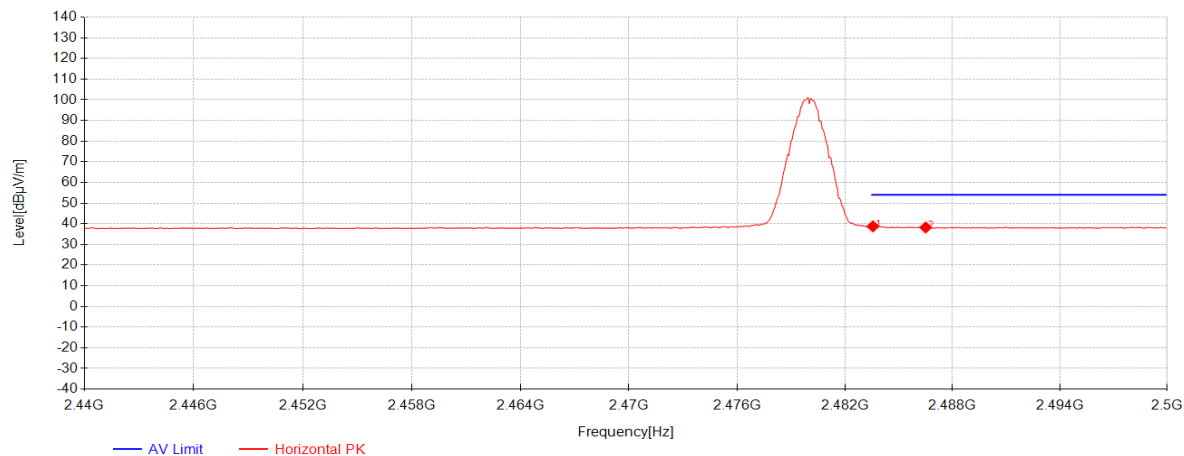


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.56	35.83	27.55	-24.63	38.75	54.00	15.25	Horizontal
2	2486.5	35.29	27.56	-24.63	38.22	54.00	15.78	Horizontal

BLE 1M_Channel 39

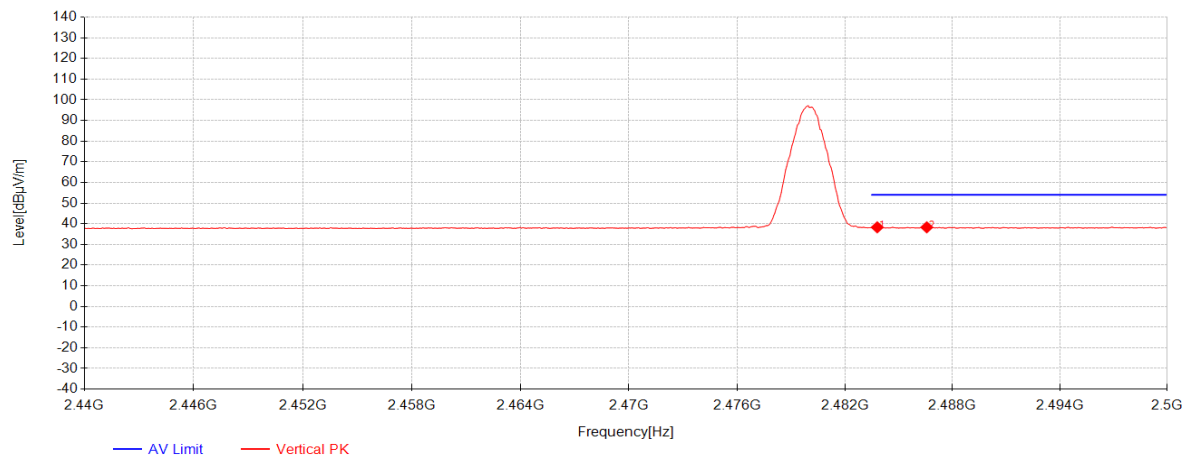


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.8	35.38	27.55	-24.63	38.30	54.00	15.70	Vertical
2	2486.56	35.36	27.56	-24.63	38.29	54.00	15.71	Vertical

BLE 2M_Channel 00

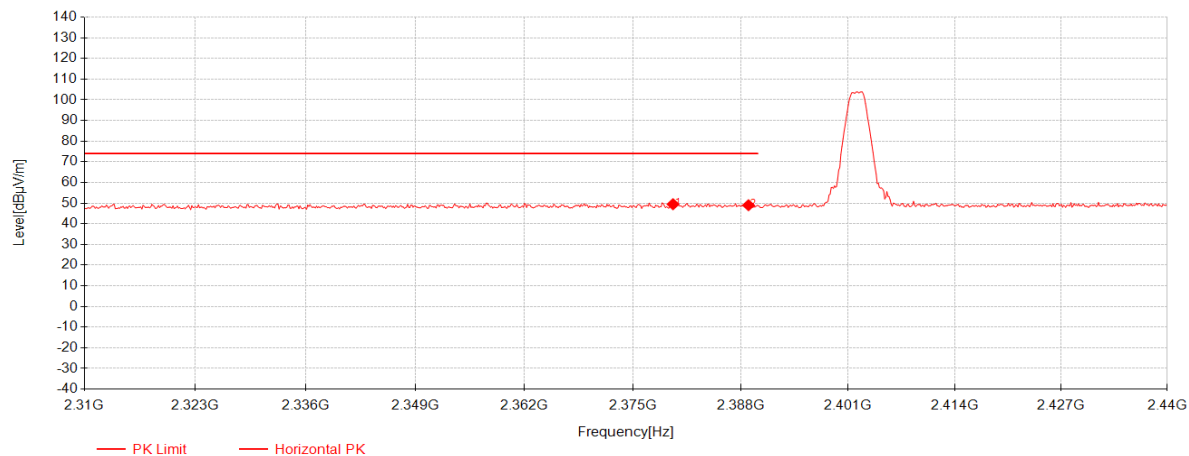


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2379.81	47.04	27.26	-24.82	49.48	74.00	24.52	Horizontal
2	2388.91	46.52	27.29	-24.82	48.99	74.00	25.01	Horizontal

BLE 2M_Channel 00

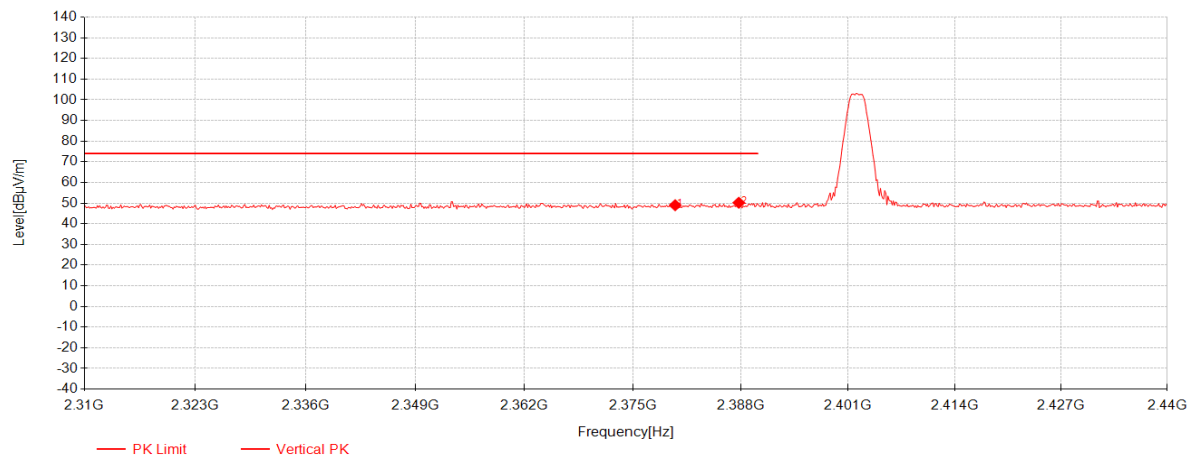


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2380.07	46.55	27.26	-24.82	48.99	74.00	25.01	Vertical
2	2387.74	47.72	27.29	-24.82	50.19	74.00	23.81	Vertical

BLE 2M_Channel 00

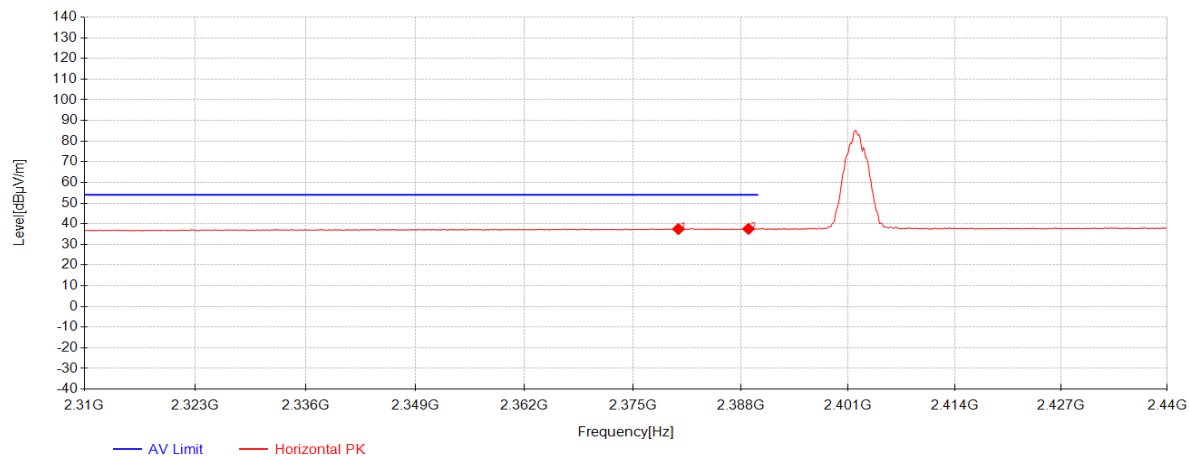


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2380.46	35.02	27.27	-24.82	37.46	54.00	16.54	Horizontal
2	2388.91	35.07	27.29	-24.82	37.54	54.00	16.46	Horizontal

BLE 2M_Channel 00

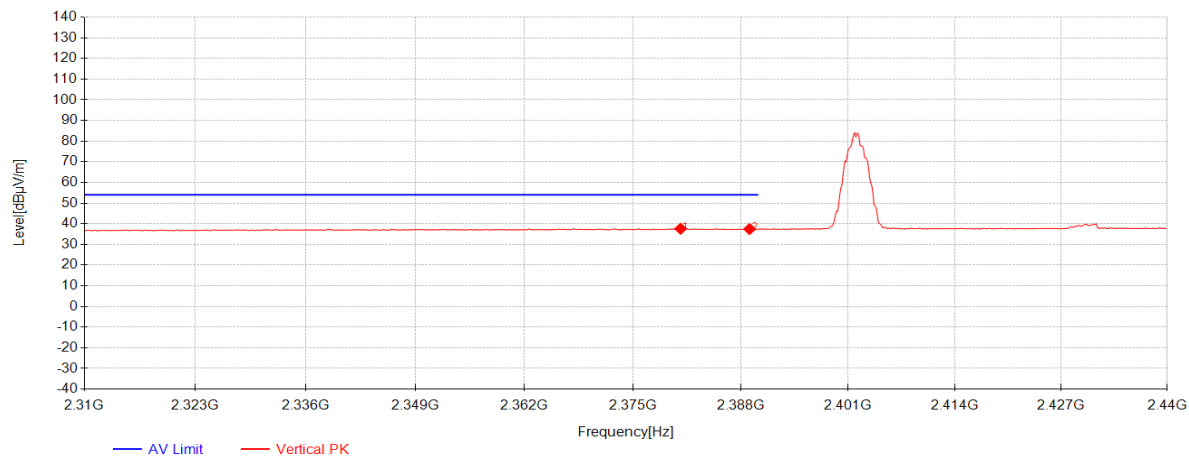


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2380.72	35.16	27.27	-24.82	37.60	54.00	16.40	Vertical
2	2389.04	34.99	27.29	-24.82	37.46	54.00	16.54	Vertical

BLE 2M_Channel 39

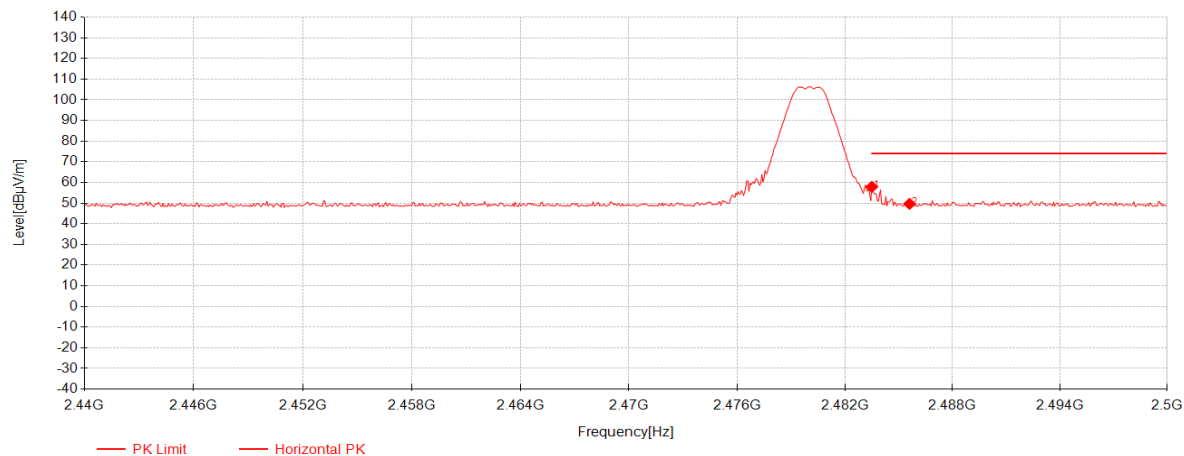


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.5	54.98	27.55	-24.63	57.90	74.00	16.10	Horizontal
2	2485.6	46.73	27.56	-24.63	49.66	74.00	24.34	Horizontal

BLE 2M_Channel 39

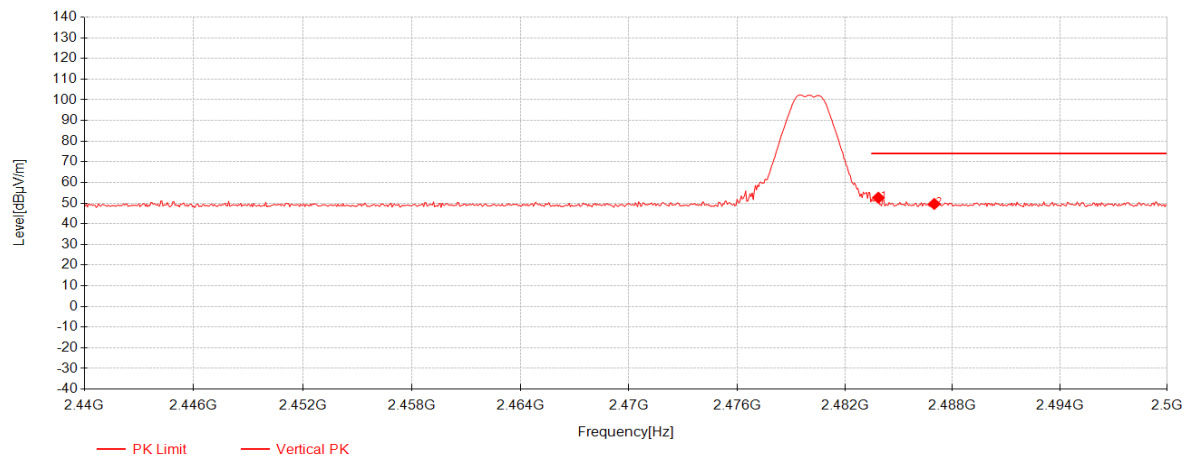


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.86	49.69	27.55	-24.63	52.61	74.00	21.39	Vertical
2	2486.98	46.68	27.56	-24.63	49.62	74.00	24.38	Vertical

BLE 2M_Channel 39

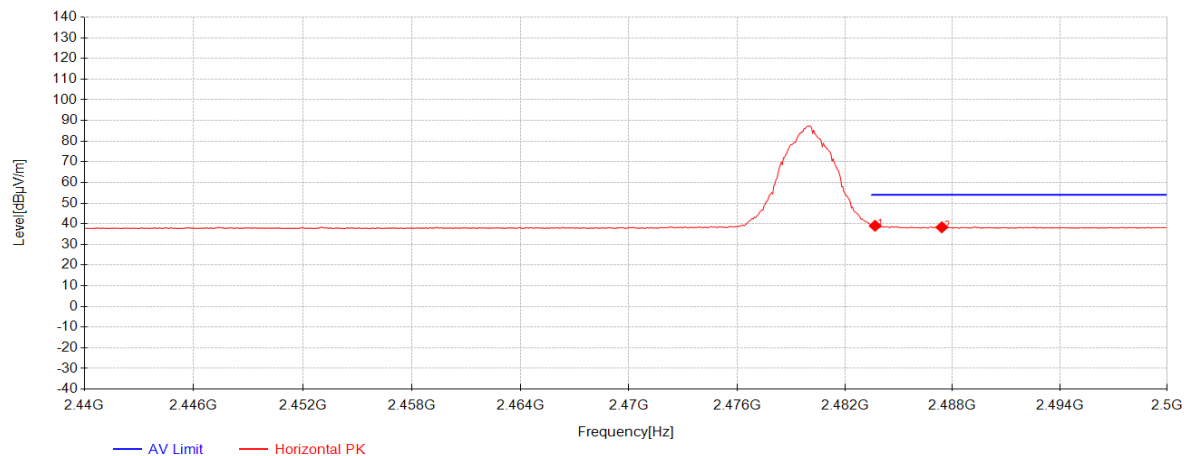

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	36.11	27.55	-24.63	39.03	54.00	14.97	Horizontal
2	2487.4	35.37	27.56	-24.63	38.31	54.00	15.69	Horizontal

BLE 2M_Channel 39

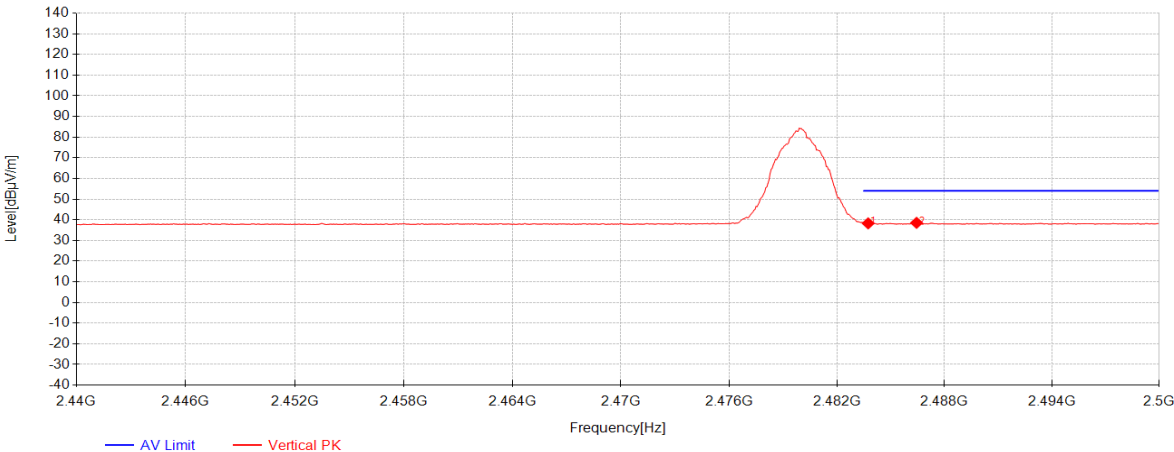

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.74	35.36	27.55	-24.63	38.28	54.00	15.72	Vertical
2	2486.44	35.60	27.56	-24.63	38.53	54.00	15.47	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:
 Level = Reading(dBμV) + AF(dB/m) + Factor(dB):
 AF = Antenna Factor(dB/m)
 Factor = Cable Factor(dB) - Preamplifier gain(dB)
 Margin = Limit(dBμV/m) – Level(dBμV/m)
- Both peak and average measured complies with the limit line, so test result is "PASS"

---End of Report---