





Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Pol : Vertical Detector : Peak

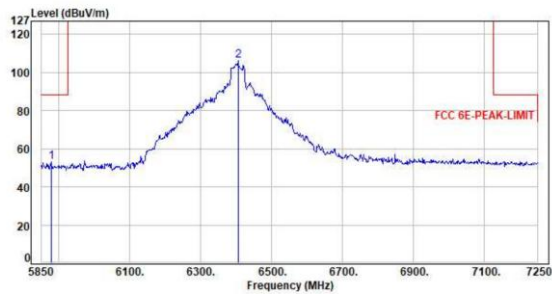

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5878.00	0.97	52.34	53.31	88.20	-34.89	Peak	100	91	P
2	6405.00	3.09	103.13	106.22	200.00	-93.78	Peak	100	91	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Pol : Vertical Detector : Average

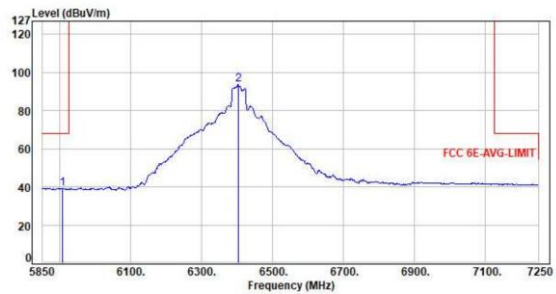

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5908.00	0.92	38.28	39.20	68.20	-29.00	Average	100	91	P
2	6404.40	3.09	90.48	93.57	200.00	-106.43	Average	100	91	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Pol : Horizontal Detector : Peak

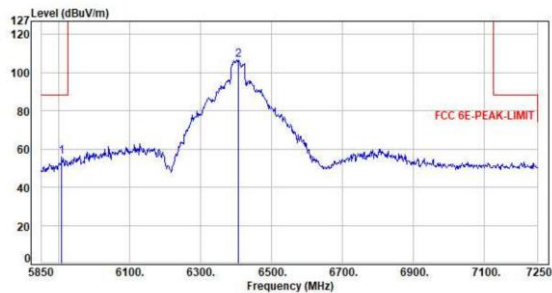

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5908.00	0.92	54.95	55.87	88.20	-32.33	Peak	100	51	P
2	6405.00	3.09	103.54	106.63	200.00	-93.37	Peak	100	51	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Pol : Horizontal Detector : Average

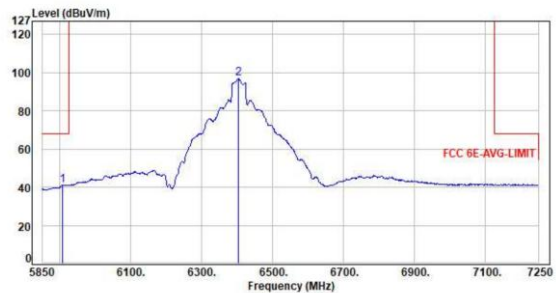


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5908.00	0.92	40.25	41.17	68.20	-27.03	Average	100	51	P
2	6404.40	3.09	93.93	97.02	200.00	-102.98	Average	100	51	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Pol : Vertical Detector : Peak

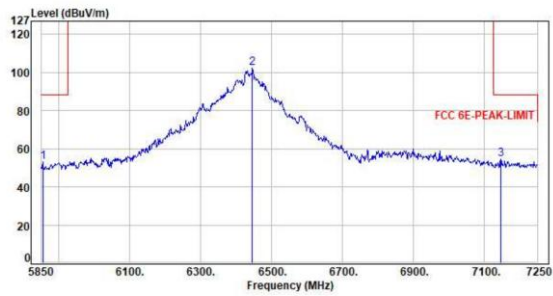

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5855.60	1.03	51.93	52.96	88.20	-35.24	Peak	100	71	P
2	6445.00	3.25	98.93	102.18	200.00	-97.82	Peak	100	71	P
3	7145.00	3.78	50.92	54.70	88.20	-33.50	Peak	100	71	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Pol : Horizontal Detector : Peak

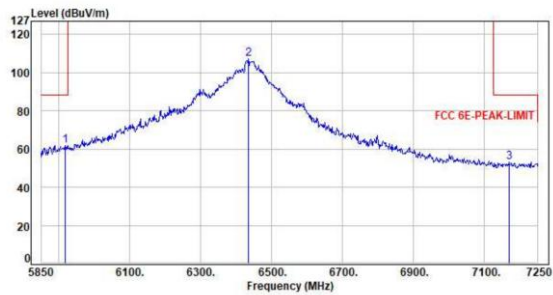


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	61.04	61.97	88.20	-26.23	Peak	100	145	P
2	6433.80	3.21	103.92	107.13	200.00	-92.87	Peak	100	145	P
3	7168.80	3.80	49.48	53.28	88.20	-34.92	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Pol : Vertical Detector : Peak

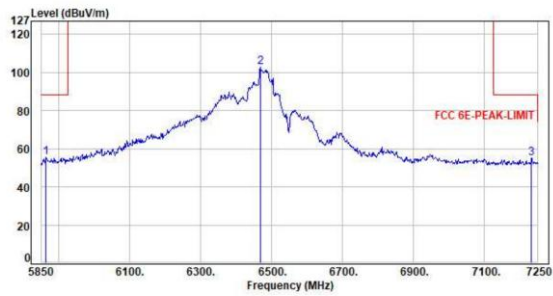

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5864.00	1.01	54.74	55.75	88.20	-32.45	Peak	388	215	P
2	6467.40	3.31	99.66	102.97	200.00	-97.03	Peak	388	215	P
3	7231.80	3.90	50.96	54.86	88.20	-33.34	Peak	388	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Pol : Horizontal Detector : Peak

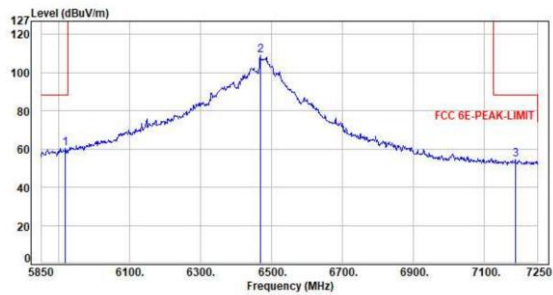


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	59.31	60.24	88.20	-27.96	Peak	100	144	P
2	6467.40	3.31	105.66	108.97	200.00	-91.03	Peak	100	144	P
3	7187.00	3.82	50.87	54.69	88.20	-33.51	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Pol : Vertical Detector : Peak

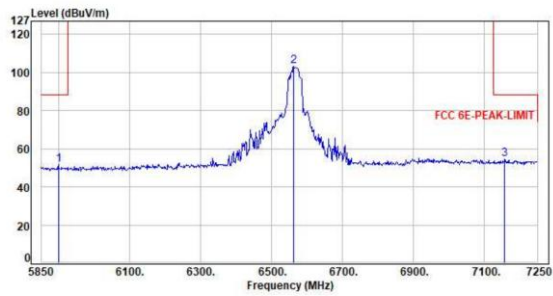

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5899.00	0.93	50.60	51.53	88.20	-36.67	Peak	100	219	P
2	6562.60	3.36	99.82	103.18	200.00	-96.82	Peak	100	219	P
3	7156.20	3.77	50.98	54.75	88.20	-33.45	Peak	100	219	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Pol : Horizontal Detector : Peak

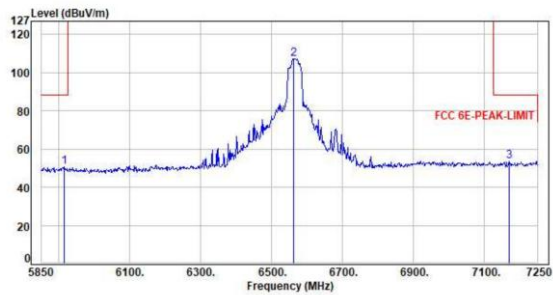


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	49.55	50.48	88.20	-37.72	Peak	100	228	P
2	6562.60	3.36	103.77	107.13	200.00	-92.87	Peak	100	228	P
3	7170.20	3.80	49.95	53.75	88.20	-34.45	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Pol : Vertical Detector : Peak

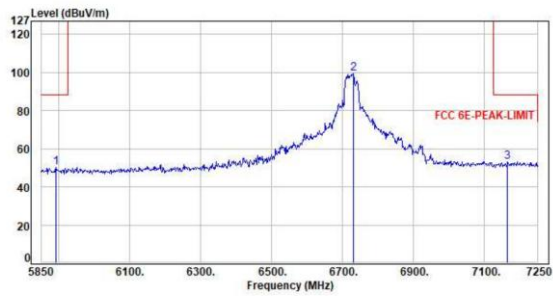

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5892.00	0.95	49.13	50.08	88.20	-38.12	Peak	100	234	P
2	6730.60	3.51	96.19	99.70	200.00	-100.30	Peak	100	234	P
3	7164.60	3.80	49.27	53.07	88.20	-35.13	Peak	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Pol : Horizontal Detector : Peak

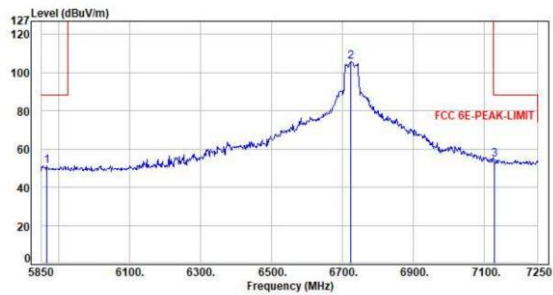


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5866.00	1.01	50.24	51.25	88.20	-36.95	Peak	100	230	P
2	6722.20	3.52	102.45	105.97	200.00	-94.03	Peak	100	230	P
3	7126.00	3.78	50.55	54.33	88.20	-33.87	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Pol : Vertical Detector : Peak

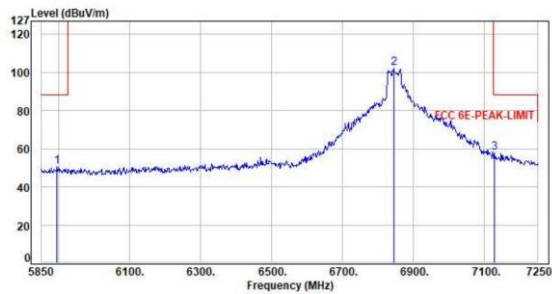

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5894.80	0.93	49.57	50.50	88.20	-37.70	Peak	100	84	P
2	6844.00	3.58	98.71	102.29	200.00	-97.71	Peak	100	84	P
3	7128.20	3.78	54.07	57.85	88.20	-30.35	Peak	100	84	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Pol : Horizontal Detector : Peak

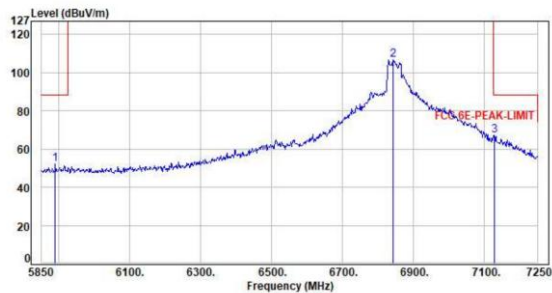


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5890.60	0.95	51.33	52.28	88.20	-35.92	Peak	100	232	P
2	6842.60	3.58	102.99	106.57	200.00	-93.43	Peak	100	232	P
3	7126.80	3.78	63.41	67.19	88.20	-21.01	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Pol : Vertical Detector : Peak

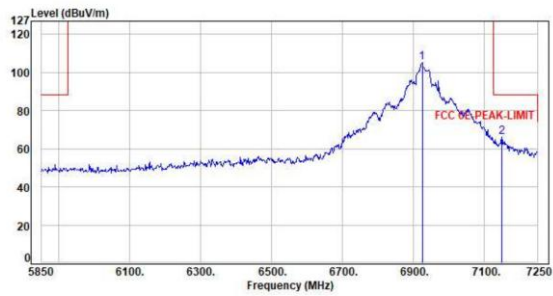

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6923.80	3.76	101.52	105.28	200.00	-94.72	Peak	100	87	P
2	7149.20	3.77	62.14	65.91	88.20	-22.29	Peak	100	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Pol : Vertical Detector : Average

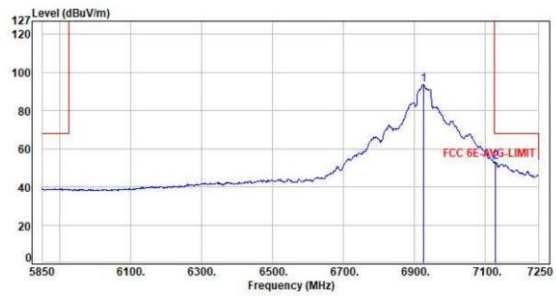

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.20	3.75	89.97	93.72	200.00	-106.28	Average	100	87	P
2	7126.80	3.78	49.47	53.25	68.20	-14.95	Average	100	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Pol : Horizontal Detector : Peak

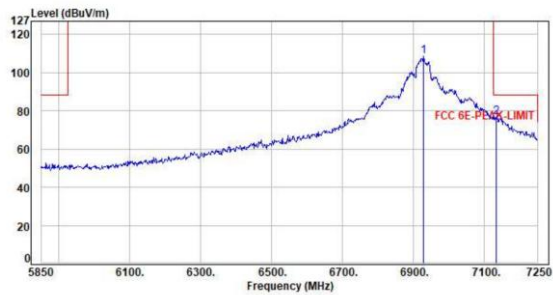

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	3.75	104.84	108.59	200.00	-91.41	Peak	100	232	P
2	7132.40	3.78	72.85	76.63	88.20	-11.57	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Pol : Horizontal Detector : Average

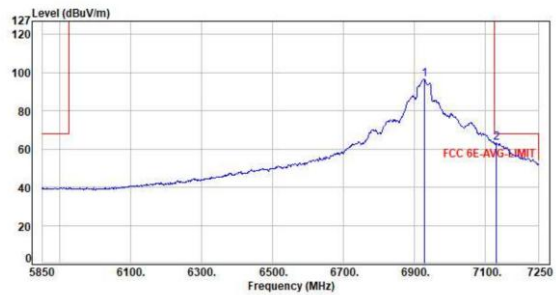


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	3.75	92.96	96.71	200.00	-103.29	Average	100	232	P
2	7129.60	3.78	59.48	63.26	68.20	-4.94	Average	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Pol : Vertical Detector : Peak

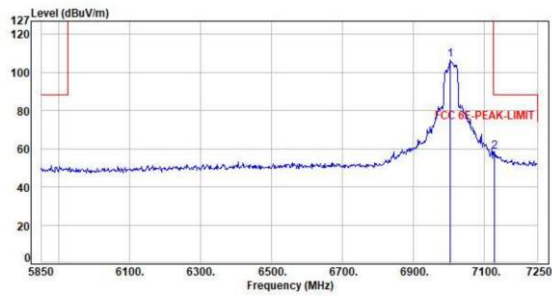

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	3.63	103.05	106.68	200.00	-93.32	Peak	100	109	P
2	7126.80	3.78	54.47	58.25	88.20	-29.95	Peak	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Pol : Vertical Detector : Average

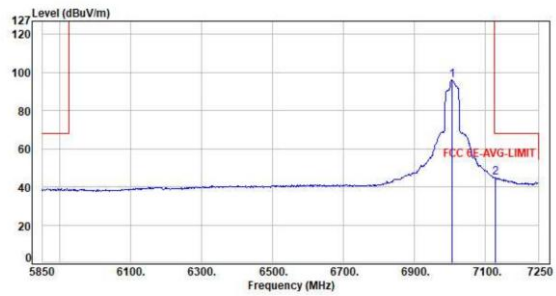

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	3.64	92.50	96.14	200.00	-103.86	Average	100	109	P
2	7126.80	3.78	41.24	45.02	88.20	-23.18	Average	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Pol : Horizontal Detector : Peak

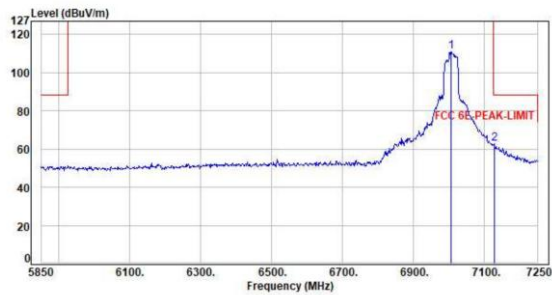

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	3.64	107.42	111.06	200.00	-88.94	Peak	100	231	P
2	7126.80	3.78	58.81	62.59	88.20	-25.61	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Pol : Horizontal Detector : Average

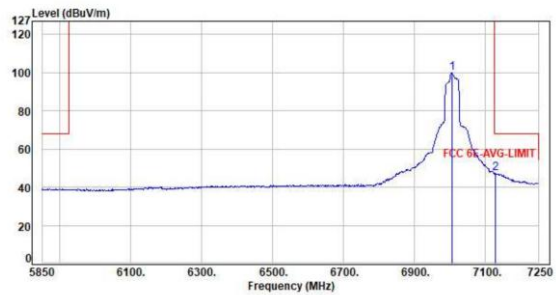


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	3.64	96.31	99.95	200.00	-100.05	Average	100	231	P
2	7126.80	3.78	43.56	47.34	88.20	-20.86	Average	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Pol : Vertical Detector : Peak

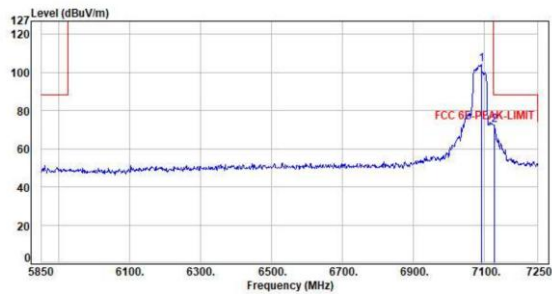

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7090.40	3.77	100.62	104.39	200.00	-95.61	Peak	103	109	P
2	7126.80	3.78	68.46	72.24	88.20	-15.96	Peak	103	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Pol : Vertical Detector : Average

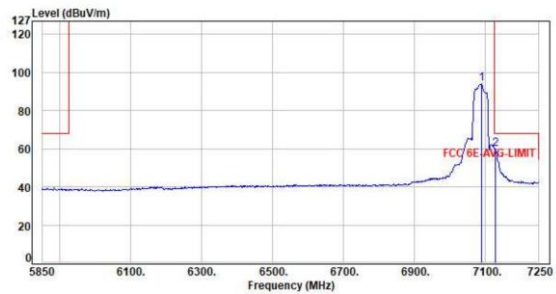

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7087.60	3.77	90.25	94.02	200.00	-105.98	Average	103	109	P
2	7126.80	3.78	56.17	59.95	68.20	-8.25	Average	103	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Pol : Horizontal Detector : Peak

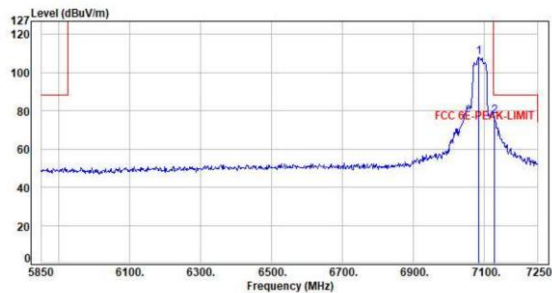

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7083.40	3.77	104.20	107.97	200.00	-92.03	Peak	100	233	P
2	7126.80	3.78	73.46	77.24	88.20	-10.96	Peak	100	233	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Pol : Horizontal Detector : Average

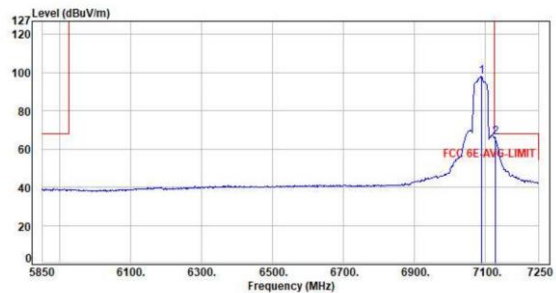


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7087.60	3.77	94.14	97.91	200.00	-102.09	Average	100	233	P
2	7126.80	3.78	62.52	66.30	68.20	-1.90	Average	100	233	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Pol : Vertical Detector : Peak

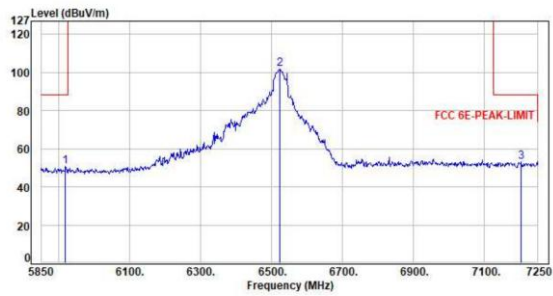

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	49.54	50.47	88.20	-37.73	Peak	272	71	P
2	6522.00	3.38	98.32	101.70	200.00	-98.30	Peak	272	71	P
3	7203.80	3.86	49.42	53.28	88.20	-34.92	Peak	272	71	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Pol : Horizontal Detector : Peak

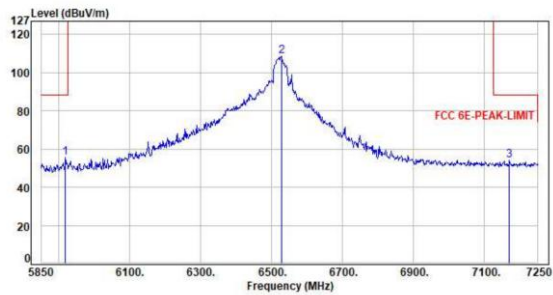


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	54.44	55.37	88.20	-32.83	Peak	121	227	P
2	6527.60	3.37	105.42	108.79	200.00	-91.21	Peak	121	227	P
3	7170.20	3.80	50.32	54.12	88.20	-34.08	Peak	121	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH187 NSS1 MCS0
Pol : Vertical Detector : Peak

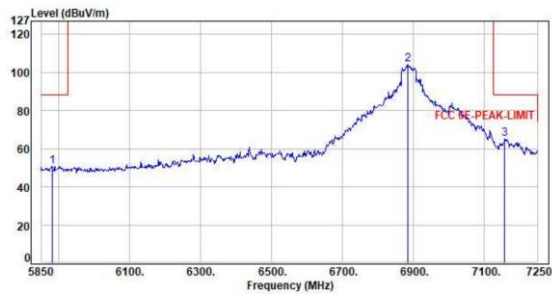

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5880.00	0.98	49.93	50.91	88.20	-37.29	Peak	102	88	P
2	6883.20	3.78	100.42	104.12	200.00	-95.88	Peak	102	88	P
3	7156.20	3.77	61.50	65.27	88.20	-22.93	Peak	102	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH187 NSS1 MCS0
Pol : Vertical Detector : Average

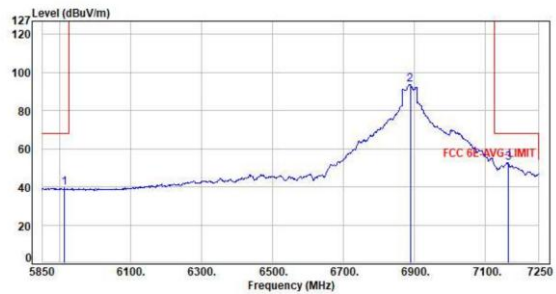

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5913.00	0.93	38.47	39.40	68.20	-28.80	Average	102	88	P
2	6887.40	3.71	90.20	93.91	200.00	-106.09	Average	102	88	P
3	7163.20	3.80	48.80	52.60	68.20	-15.60	Average	102	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH187 NSS1 MCS0
Pol : Horizontal Detector : Peak

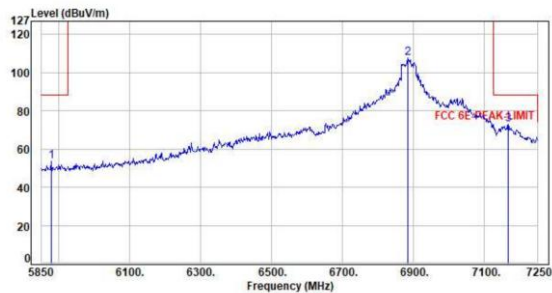

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5878.00	0.97	52.86	53.83	88.20	-34.37	Peak	109	231	P
2	6884.60	3.71	103.74	107.45	200.00	-92.55	Peak	109	231	P
3	7167.40	3.79	68.98	72.77	88.20	-15.43	Peak	109	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH187 NSS1 MCS0
Pol : Horizontal Detector : Average

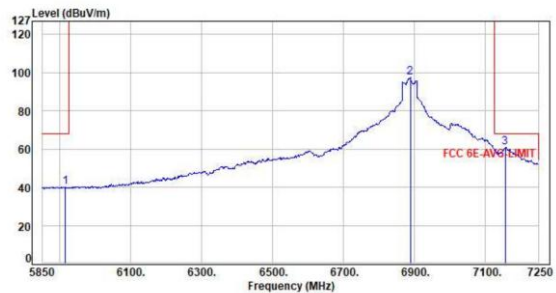


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	39.23	40.16	68.20	-28.04	Average	109	231	P
2	6887.40	3.71	93.71	97.42	200.00	-102.58	Average	109	231	P
3	7154.00	3.78	57.26	61.04	68.20	-7.16	Average	109	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Pol : Vertical Detector : Peak

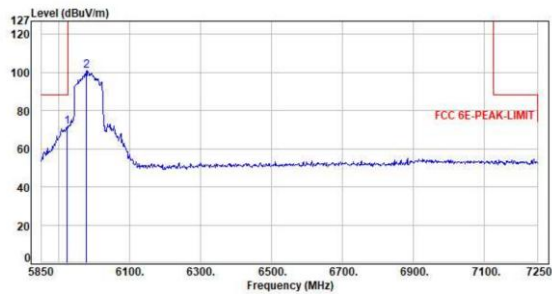

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	70.49	71.41	88.20	-16.79	Peak	100	48	P
2	5977.48	0.92	100.07	100.99	200.00	-99.01	Peak	100	48	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Pol : Vertical Detector : Average

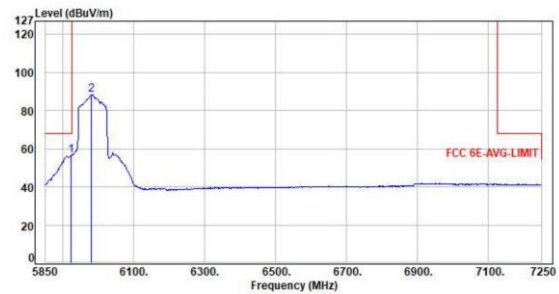

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	55.54	56.46	68.20	-11.74	Average	100	48	P
2	5981.60	0.91	87.60	88.51	200.00	-111.49	Average	100	48	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Pol : Horizontal Detector : Peak

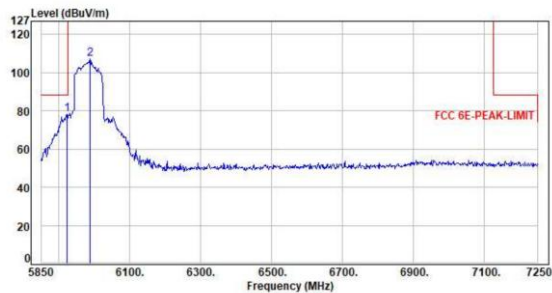

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	77.07	77.99	88.20	-10.21	Peak	100	42	P
2	5988.60	0.91	106.50	107.41	200.00	-92.59	Peak	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Pol : Horizontal Detector : Average

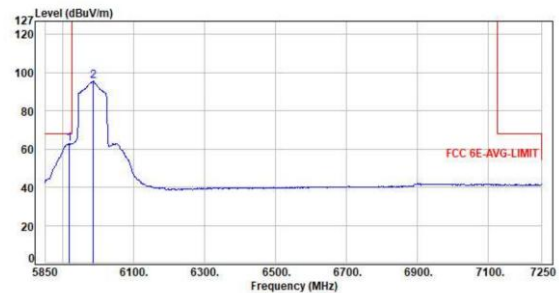


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	61.92	62.85	68.20	-5.35	Average	100	42	P
2	5985.00	0.91	94.61	95.52	200.00	-104.48	Average	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Pol : Vertical Detector : Peak

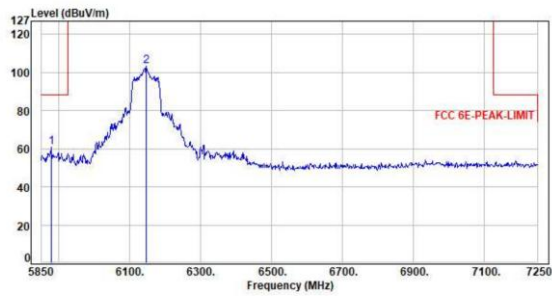

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5878.00	0.97	59.99	60.96	88.20	-27.24	Peak	105	40	P
2	6146.00	1.61	101.85	103.46	200.00	-96.54	Peak	105	40	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Pol : Vertical Detector : Average

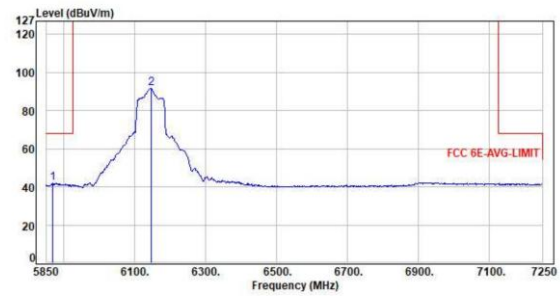

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5868.20	1.00	41.14	42.14	68.20	-26.06	Average	105	40	P
2	6146.00	1.61	90.14	91.75	200.00	-108.25	Average	105	40	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Pol : Horizontal Detector : Peak

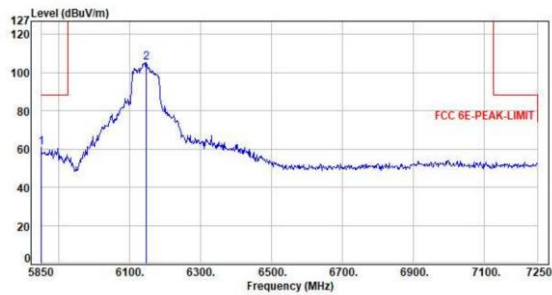

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	1.04	59.70	60.74	88.20	-27.46	Peak	100	39	P
2	6146.00	1.61	103.85	105.46	200.00	-94.54	Peak	100	39	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Pol : Horizontal Detector : Average

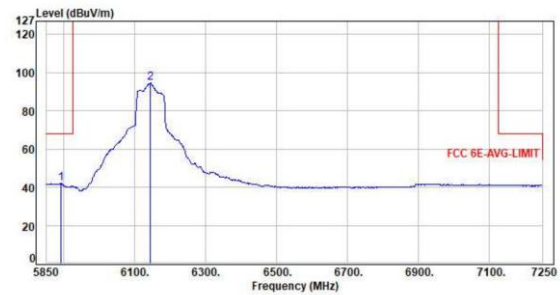


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5892.00	0.95	41.08	42.03	68.20	-26.17	Average	100	39	P
2	6144.00	1.59	93.06	94.65	200.00	-105.35	Average	100	39	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Pol : Vertical Detector : Peak

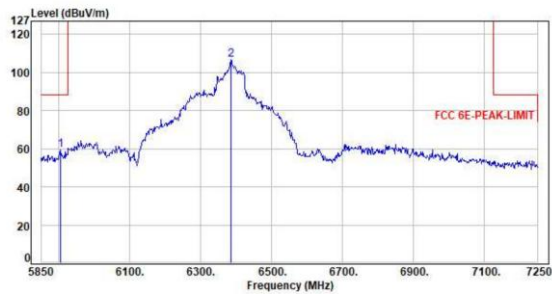

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5904.60	0.93	58.29	59.22	88.20	-28.98	Peak	400	141	P
2	6386.20	3.01	103.90	106.91	200.00	-93.09	Peak	400	141	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Pol : Vertical Detector : Average

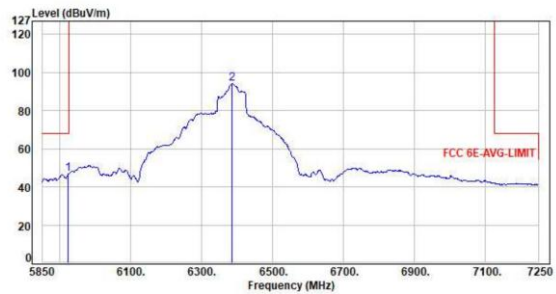

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	45.70	46.62	68.20	-21.58	Average	400	141	P
2	6386.20	3.01	91.14	94.15	200.00	-105.85	Average	400	141	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Pol : Horizontal Detector : Peak

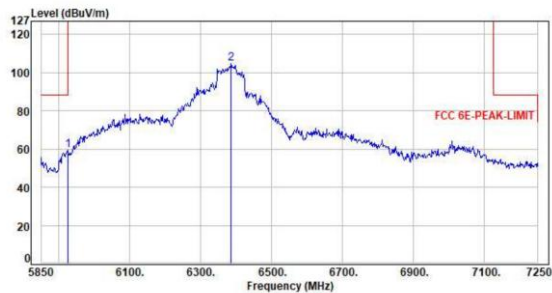

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.60	0.92	58.37	59.29	200.00	-140.71	Peak	100	37	P
2	6386.20	3.01	101.64	104.65	200.00	-95.35	Peak	100	37	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Pol : Horizontal Detector : Average

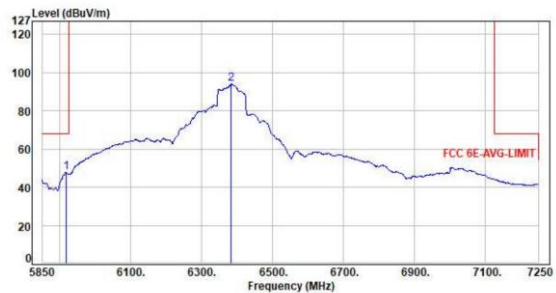


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5917.20	0.93	46.83	47.76	68.20	-20.44	Average	100	37	P
2	6383.40	2.99	91.03	94.02	200.00	-105.98	Average	100	37	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Pol : Vertical Detector : Peak

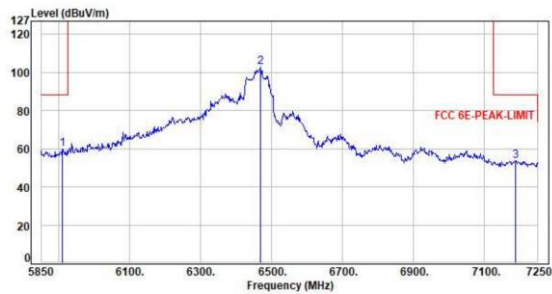

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	58.88	59.80	88.20	-28.40	Peak	390	215	P
2	6468.00	3.32	99.75	103.07	200.00	-96.93	Peak	390	215	P
3	7187.00	3.82	49.95	53.77	88.20	-34.43	Peak	390	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Pol : Horizontal Detector : Peak

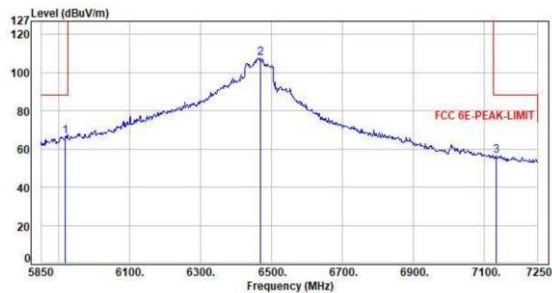


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	65.95	66.88	88.20	-21.32	Peak	100	144	P
2	6467.40	3.31	104.55	107.86	200.00	-92.14	Peak	100	144	P
3	7132.40	3.78	52.66	56.44	88.20	-31.76	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Pol : Vertical Detector : Peak

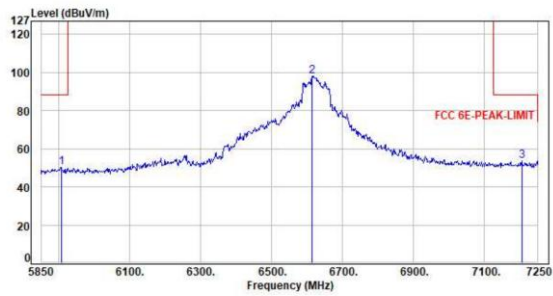

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5987.48	0.92	49.48	50.32	88.20	-37.88	Peak	100	57	P
2	6614.40	3.35	94.79	98.14	200.00	-101.86	Peak	100	57	P
3	7285.20	3.85	49.98	53.83	88.20	-34.37	Peak	100	57	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Pol : Horizontal Detector : Peak

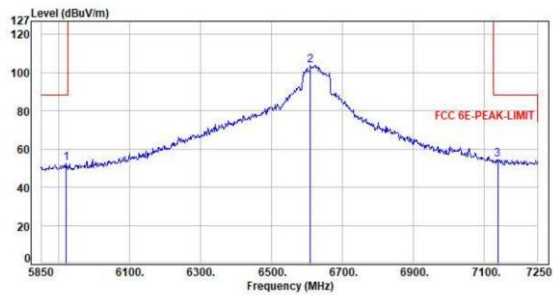


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	51.76	52.68	88.20	-35.52	Peak	100	229	P
2	6608.80	3.35	100.66	104.01	200.00	-95.99	Peak	100	229	P
3	7136.60	3.77	50.70	54.47	88.20	-33.73	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Pol : Vertical Detector : Peak

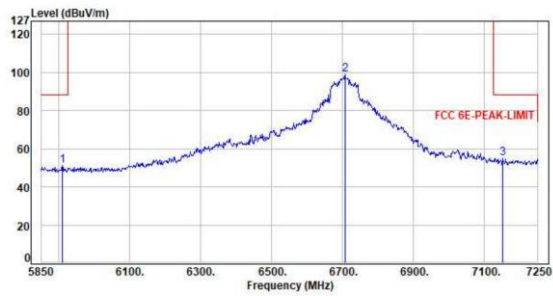

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	50.31	51.23	88.20	-36.97	Peak	100	60	P
2	6706.00	3.51	95.26	98.77	200.00	-101.23	Peak	100	60	P
3	7150.60	3.77	51.20	54.97	88.20	-33.23	Peak	100	60	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Pol : Horizontal Detector : Peak

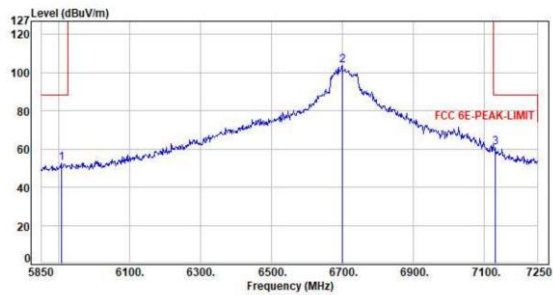


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5907.40	0.92	51.56	52.48	88.20	-35.72	Peak	100	231	P
2	6698.40	3.51	100.11	103.62	200.00	-96.38	Peak	100	231	P
3	7129.60	3.78	56.87	60.65	88.20	-27.55	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Pol : Vertical Detector : Peak

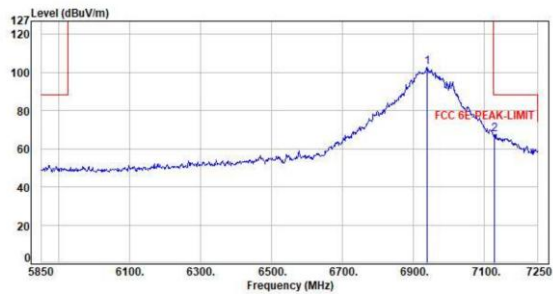

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6939.20	3.75	99.19	102.94	200.00	-97.06	Peak	101	87	P
2	7126.00	3.78	63.72	67.50	88.20	-20.70	Peak	101	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Pol : Vertical Detector : Average

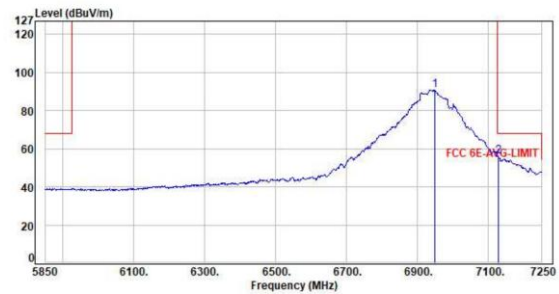

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6947.60	3.74	87.24	90.98	200.00	-109.02	Average	101	87	P
2	7126.20	3.78	52.29	56.07	88.20	-32.13	Average	101	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Pol : Horizontal Detector : Peak

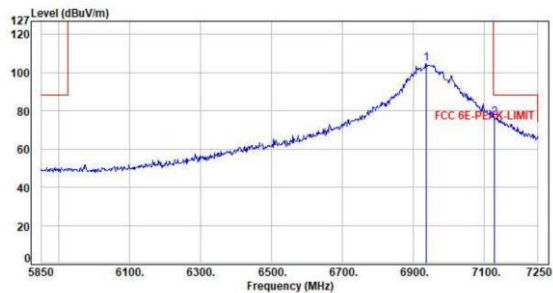

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6935.00	3.75	100.83	104.58	200.00	-95.42	Peak	100	231	P
2	7126.00	3.78	72.73	76.51	88.20	-11.69	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Pol : Horizontal Detector : Average

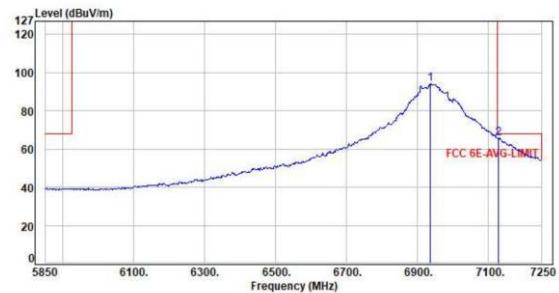


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6935.00	3.75	90.41	94.16	200.00	-105.84	Average	100	231	P
2	7126.20	3.78	62.00	65.78	88.20	-22.42	Average	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Pol : Vertical Detector : Peak

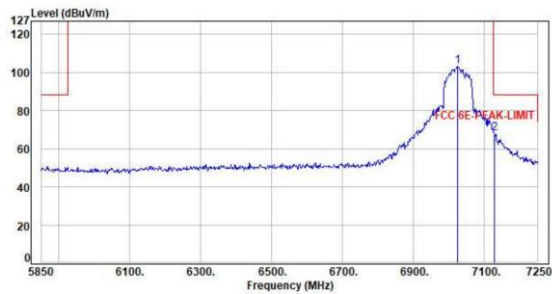

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7023.20	3.67	99.52	103.19	200.00	-96.81	Peak	100	88	P
2	7126.80	3.78	64.50	68.28	88.20	-19.92	Peak	100	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Pol : Vertical Detector : Average

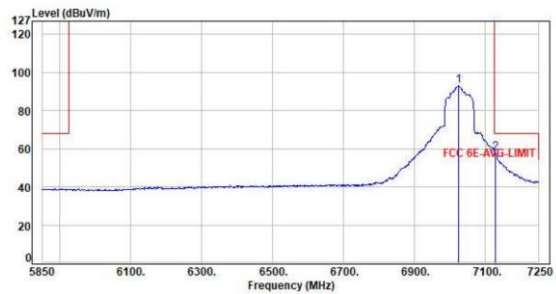

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7023.20	3.67	89.49	93.16	200.00	-106.84	Average	100	88	P
2	7126.80	3.78	54.31	58.09	88.20	-10.11	Average	100	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Pol : Horizontal Detector : Peak

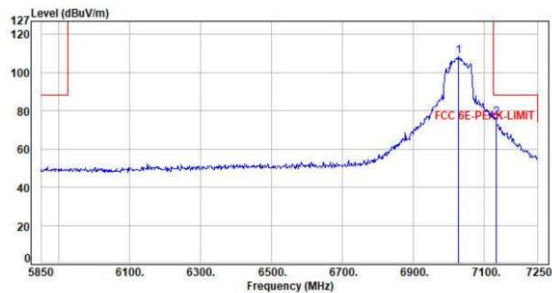

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7027.40	3.67	105.12	108.79	200.00	-91.21	Peak	100	233	P
2	7132.40	3.78	72.74	76.52	88.20	-11.68	Peak	100	233	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Pol : Horizontal Detector : Average

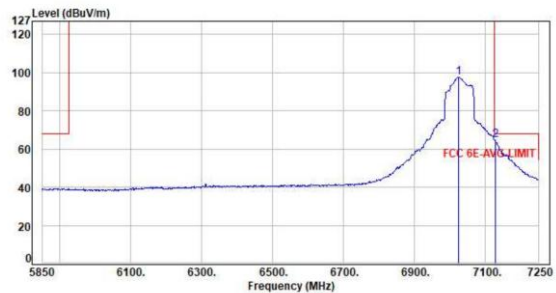


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7023.20	3.67	93.99	97.66	200.00	-102.34	Average	100	233	P
2	7126.80	3.78	61.03	64.81	88.20	-3.39	Average	100	233	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Pol : Vertical Detector : Peak

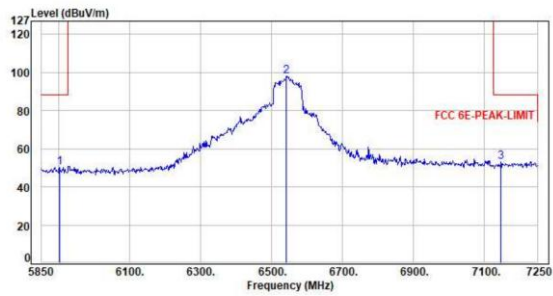

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5983.20	0.93	49.22	50.15	88.20	-38.05	Peak	100	74	P
2	6541.60	3.37	94.69	98.06	200.00	-101.94	Peak	100	74	P
3	7146.40	3.77	49.57	53.34	88.20	-34.86	Peak	100	74	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Pol : Horizontal Detector : Peak

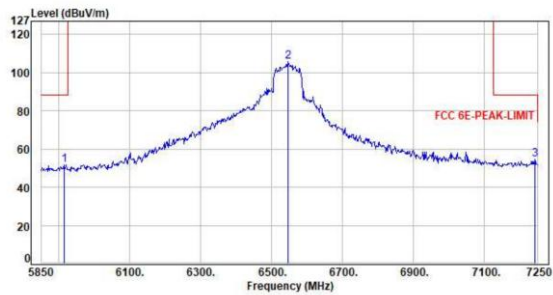


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	50.87	51.80	88.20	-36.40	Peak	128	229	P
2	6545.80	3.36	102.23	105.59	200.00	-94.41	Peak	128	229	P
3	7241.60	3.91	50.59	54.50	88.20	-33.70	Peak	128	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Pol : Vertical Detector : Peak

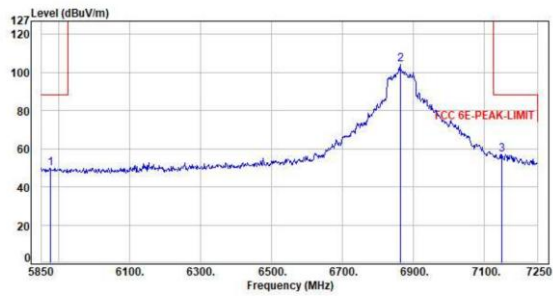

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5876.60	0.98	48.81	49.79	88.20	-38.41	Peak	101	87	P
2	6862.20	3.62	100.67	104.29	200.00	-95.71	Peak	101	87	P
3	7149.20	3.77	53.36	57.13	88.20	-31.07	Peak	101	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Pol : Horizontal Detector : Peak

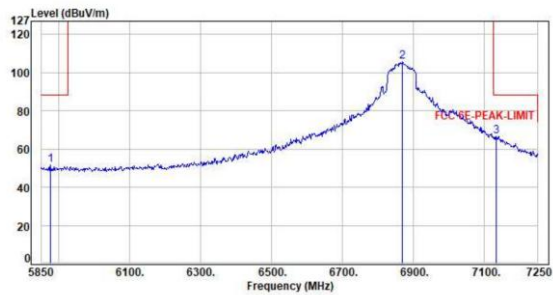


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5876.60	0.98	50.71	51.69	88.20	-36.51	Peak	100	232	P
2	6869.20	3.65	101.95	105.60	200.00	-94.40	Peak	100	232	P
3	7132.40	3.78	62.78	66.56	88.20	-21.64	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Pol : Vertical Detector : Peak

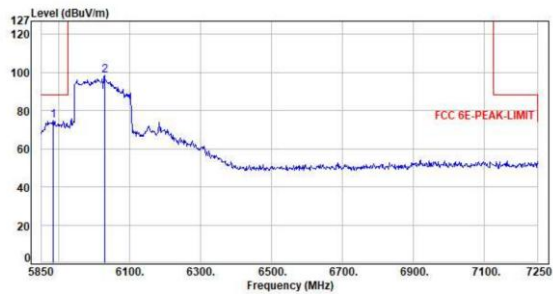

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5885.00	0.96	73.83	74.79	88.20	-13.41	Peak	100	42	P
2	6029.20	0.97	97.56	98.53	200.00	-101.47	Peak	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Pol : Vertical Detector : Average

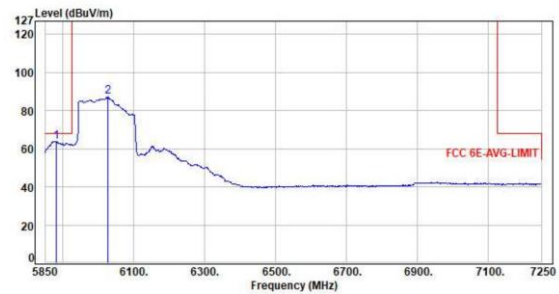

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5885.00	0.96	62.76	63.74	88.20	-4.46	Average	100	42	P
2	6029.20	0.96	86.30	87.26	200.00	-112.74	Average	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Pol : Horizontal Detector : Peak

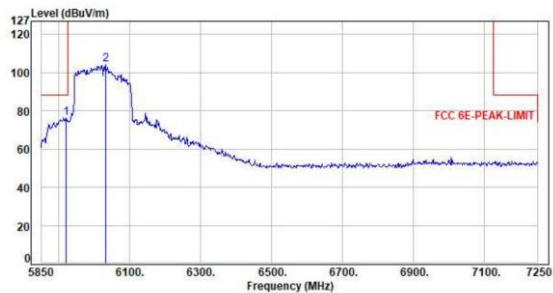

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	75.45	76.37	88.20	-11.83	Peak	100	43	P
2	6032.00	0.97	103.56	104.53	200.00	-95.47	Peak	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Pol : Horizontal Detector : Average

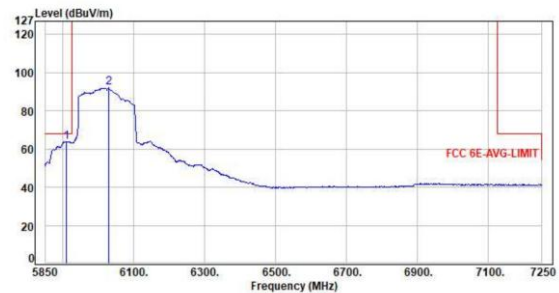


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	63.03	63.95	88.20	-4.25	Average	100	43	P
2	6029.20	0.97	91.03	92.00	200.00	-108.00	Average	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Pol : Vertical Detector : Peak

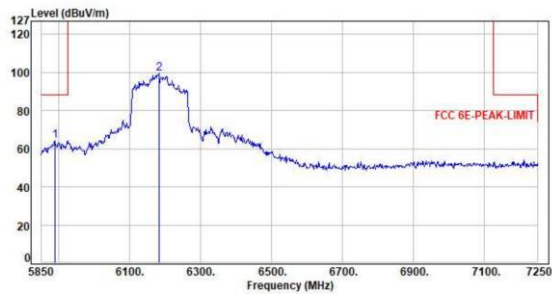

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	63.36	64.31	88.20	-23.89	Peak	100	40	P
2	6176.20	1.84	97.65	99.49	200.00	-100.51	Peak	100	40	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Pol : Vertical Detector : Average

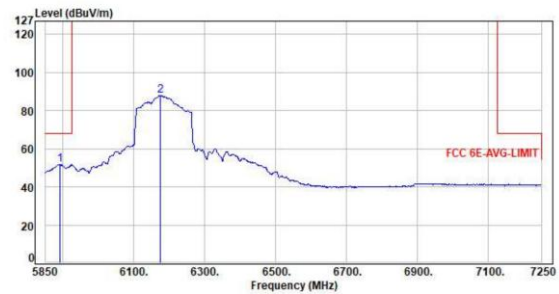

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5892.00	0.95	50.71	51.66	68.20	-16.54	Average	100	40	P
2	6176.20	1.79	86.09	87.88	200.00	-112.12	Average	100	40	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Pol : Horizontal Detector : Peak

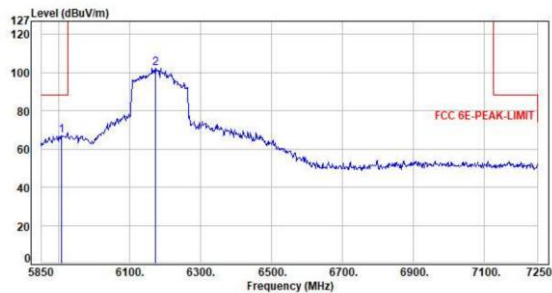

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5907.40	0.92	66.28	67.20	88.20	-21.00	Peak	100	39	P
2	6172.00	1.77	100.69	102.46	200.00	-97.54	Peak	100	39	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Pol : Horizontal Detector : Average

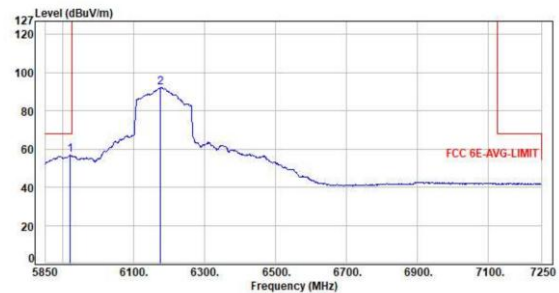


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	56.11	57.03	68.20	-11.17	Average	100	39	P
2	6176.20	1.79	90.27	92.06	200.00	-107.94	Average	100	39	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Pol : Vertical Detector : Peak

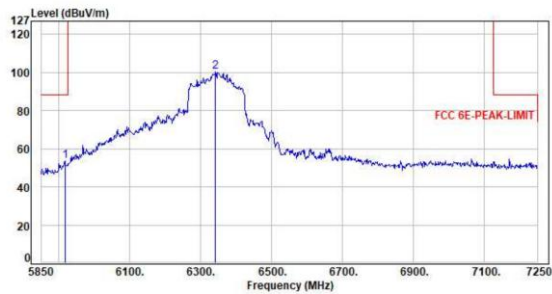

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5917.20	0.93	52.44	53.37	88.20	-34.83	Peak	100	43	P
2	6342.00	2.81	97.55	100.36	200.00	-99.64	Peak	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Pol : Vertical Detector : Average

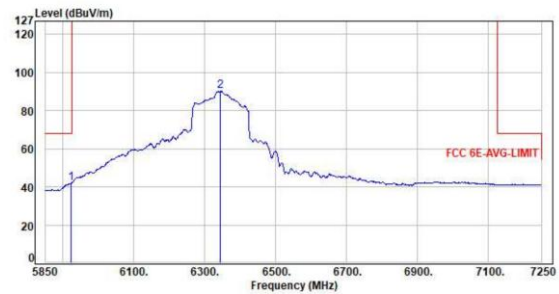

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	41.13	42.05	68.20	-26.15	Average	100	43	P
2	6342.00	2.81	87.40	90.21	200.00	-109.79	Average	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Pol : Horizontal Detector : Peak

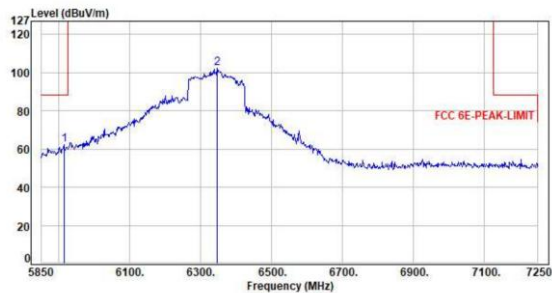

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	61.22	62.15	88.20	-26.05	Peak	100	242	P
2	6347.00	2.84	99.53	102.37	200.00	-97.63	Peak	100	242	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Pol : Horizontal Detector : Average

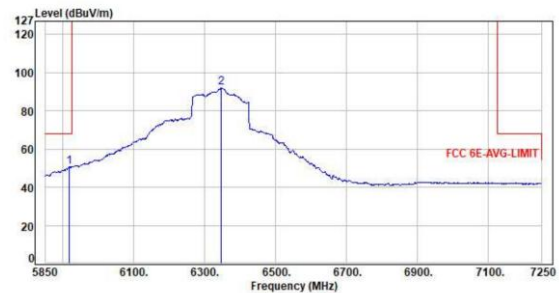


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	49.68	50.61	68.20	-17.59	Average	100	242	P
2	6347.00	2.84	89.16	92.00	200.00	-108.00	Average	100	242	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Pol : Vertical Detector : Peak

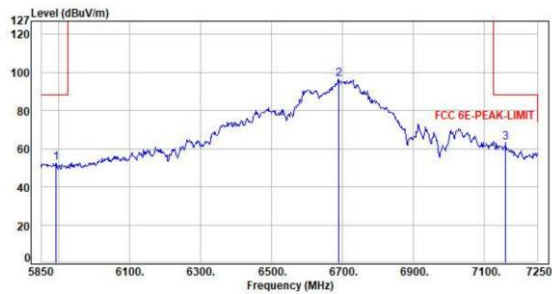

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5892.00	0.95	51.55	52.50	88.20	-35.70	Peak	400	76	P
2	6688.00	3.47	93.28	96.75	200.00	-103.25	Peak	400	76	P
3	7159.00	3.79	59.44	63.23	88.20	-24.97	Peak	400	76	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Pol : Vertical Detector : Average

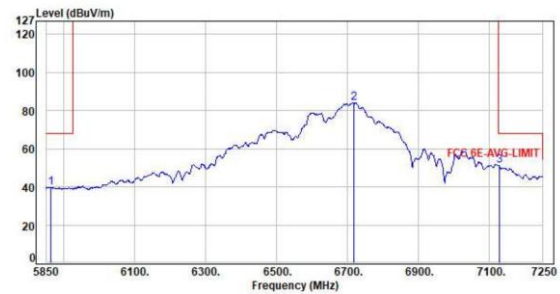

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5864.00	1.01	38.64	39.65	68.20	-28.55	Average	400	76	P
2	6718.00	3.51	80.73	84.24	200.00	-115.76	Average	400	76	P
3	7126.80	3.78	47.22	51.00	68.20	-17.20	Average	400	76	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Pol : Horizontal Detector : Peak

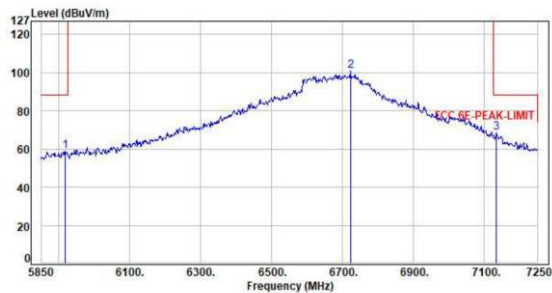

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5917.20	0.93	58.19	59.12	88.20	-29.08	Peak	100	231	P
2	6722.20	3.52	97.35	100.87	200.00	-99.13	Peak	100	231	P
3	7133.80	3.78	64.90	68.68	88.20	-19.52	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Pol : Horizontal Detector : Average

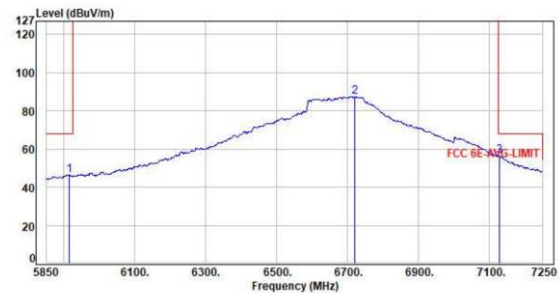


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	45.35	46.28	68.20	-21.92	Average	100	231	P
2	6720.80	3.51	84.09	87.60	200.00	-112.40	Average	100	231	P
3	7126.80	3.78	52.60	56.38	68.20	-11.82	Average	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Pol : Vertical Detector : Peak

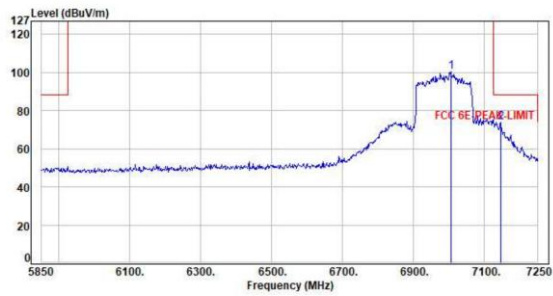

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	3.64	96.98	100.62	200.00	-99.38	Peak	100	100	P
2	7145.00	3.78	70.30	74.08	88.20	-14.12	Peak	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Pol : Vertical Detector : Average

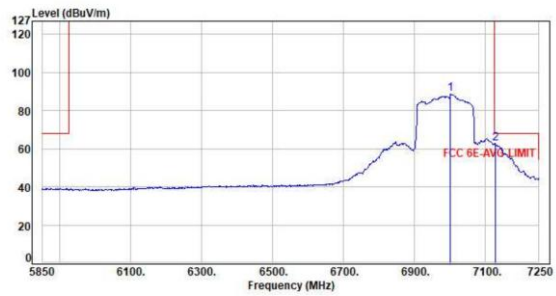

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7000.00	3.63	85.22	88.85	200.00	-111.15	Average	100	100	P
2	7128.20	3.78	58.83	62.61	68.20	-5.59	Average	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Pol : Horizontal Detector : Peak

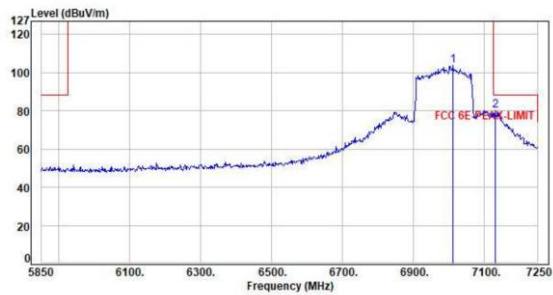

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7010.60	3.65	100.22	103.87	200.00	-96.13	Peak	100	230	P
2	7129.60	3.78	76.23	80.01	88.20	-8.19	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Pol : Horizontal Detector : Average

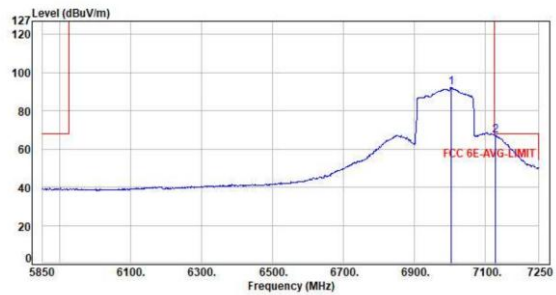


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7002.20	3.63	88.82	92.45	200.00	-107.55	Average	100	230	P
2	7128.20	3.78	63.22	67.00	68.20	-1.20	Average	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH111 NSS1 MC50
Pol : Vertical Detector : Peak

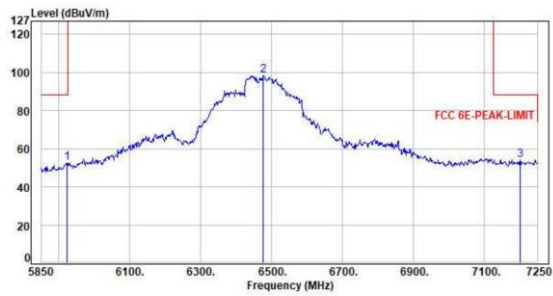

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.00	0.92	51.59	52.51	88.20	-35.69	Peak	183	58	P
2	6477.20	3.32	95.10	98.42	200.00	-101.58	Peak	183	58	P
3	7201.00	3.85	50.47	54.32	88.20	-33.88	Peak	183	58	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH111 NSS1 MC50
Pol : Horizontal Detector : Peak

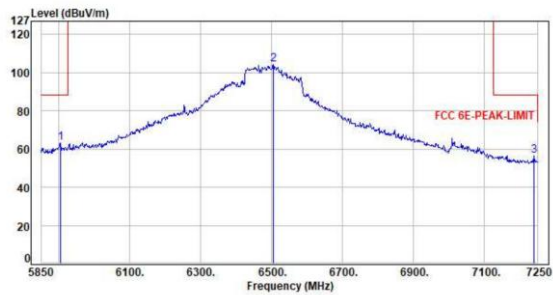


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5904.60	0.93	62.11	63.04	88.20	-25.16	Peak	116	228	P
2	6503.80	3.38	100.91	104.29	200.00	-95.71	Peak	116	228	P
3	7240.20	3.91	52.78	56.69	88.20	-31.51	Peak	116	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Pol : Vertical Detector : Peak

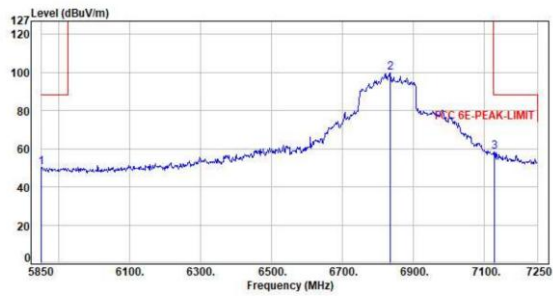

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5851.40	1.04	49.41	50.45	88.20	-37.75	Peak	100	87	P
2	6834.20	3.58	95.25	98.83	200.00	-101.17	Peak	100	87	P
3	7126.80	3.78	54.62	58.40	88.20	-29.80	Peak	100	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Pol : Vertical Detector : Average

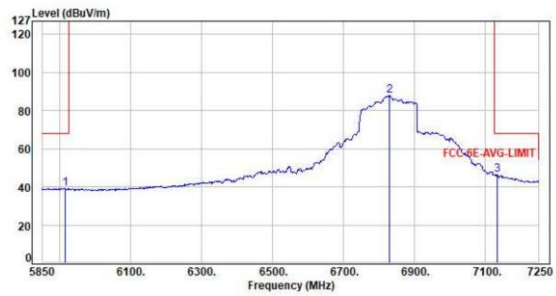

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	38.17	39.10	68.20	-29.10	Average	100	87	P
2	6830.00	3.58	84.46	88.04	200.00	-111.96	Average	100	87	P
3	7133.80	3.78	42.82	46.60	68.20	-21.60	Average	100	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Pol : Horizontal Detector : Peak

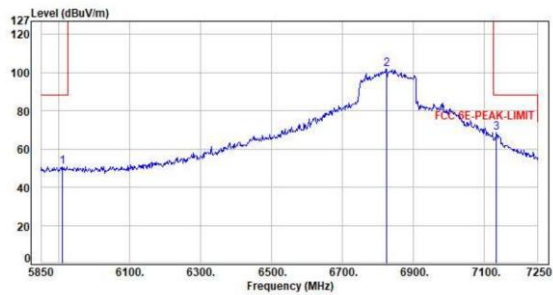

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	49.83	50.75	88.20	-37.45	Peak	101	232	P
2	6824.40	3.59	98.28	101.87	200.00	-98.13	Peak	101	232	P
3	7133.80	3.78	64.86	68.64	88.20	-19.56	Peak	101	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Pol : Horizontal Detector : Average

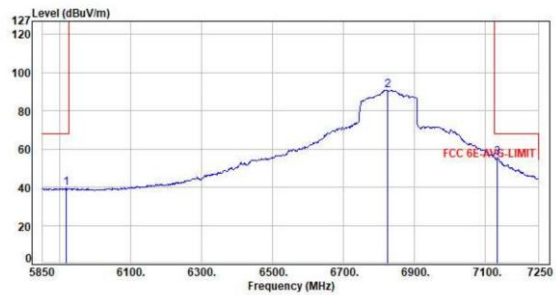

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	38.46	39.39	68.20	-28.81	Average	101	232	P
2	6824.40	3.59	87.33	90.92	200.00	-109.08	Average	101	232	P
3	7133.80	3.78	51.56	55.34	68.20	-12.86	Average	101	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Result and Data (1GHz ~ 7.5GHz)

Test Mode : 1TX 11a CH01 6Mbps

Pol : Vertical

Detector : Peak

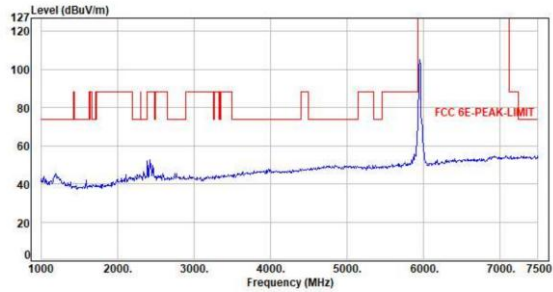


Frequency No. (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1 7500.00	3.93	51.01	54.94	74.00	-19.06	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Vertical

Detector : Average

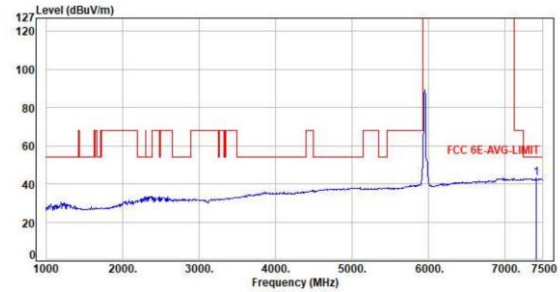


Frequency No. (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1 7409.00	4.01	39.00	43.01	54.00	-10.99	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Horizontal

Detector : Peak

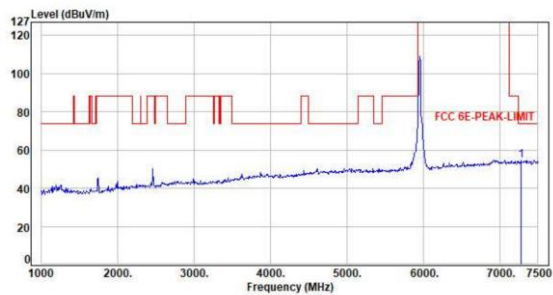


Frequency No. (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1 7285.50	4.05	50.75	54.80	74.00	-19.20	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Horizontal

Detector : Average

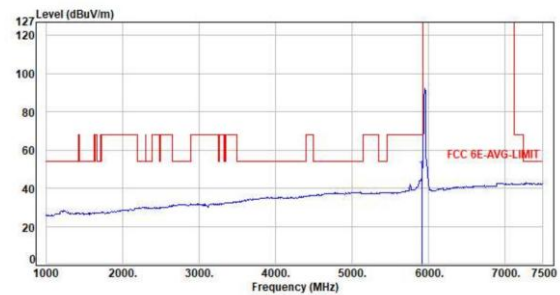

Frequency No. (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1 5920.50	0.92	47.98	48.90	68.20	-19.30	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor