




Appendix C. Test Result and Data (Bandedge)

Test Mode : 1TX 11a CH01 6Mbps

Pol : Vertical

Detector : Peak

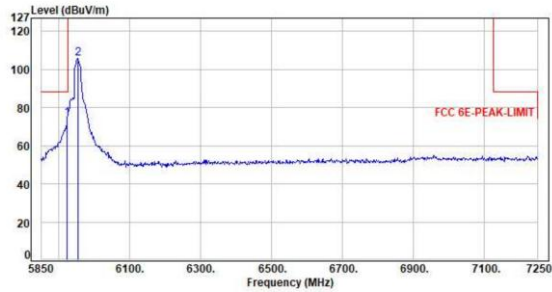


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	73.40	74.32	88.20	-13.88	Peak	100	43	P
2	5953.60	0.92	104.98	105.90	200.00	-94.10	Peak	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Vertical

Detector : Average

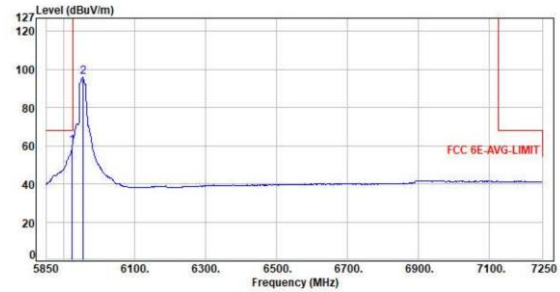


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	58.75	59.67	68.20	-8.53	Average	100	43	P
2	5953.60	0.92	94.97	95.89	200.00	-104.11	Average	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Horizontal

Detector : Peak

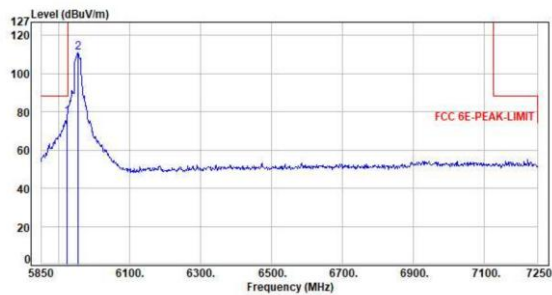


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	76.37	77.29	88.20	-10.91	Peak	100	41	P
2	5953.60	0.92	110.07	110.99	200.00	-89.01	Peak	100	41	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Horizontal

Detector : Average

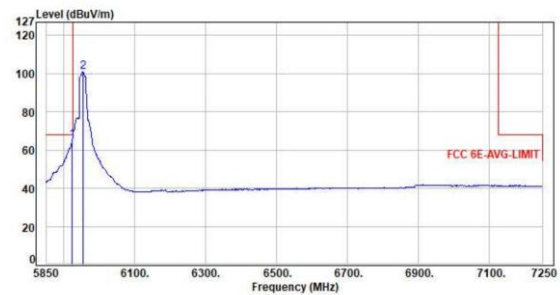

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	64.47	65.39	68.20	-2.81	Average	100	41	P
2	5953.60	0.92	100.12	101.04	200.00	-98.96	Average	100	41	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH45 6Mbps

Pol : Vertical

Detector : Peak

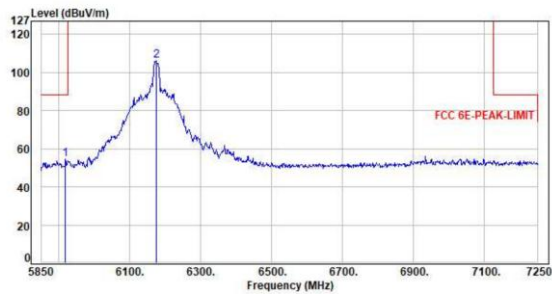

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	53.78	54.71	88.20	-33.49	Peak	100	40	P
2	6174.00	1.79	104.29	106.08	200.00	-93.92	Peak	100	40	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH45 6Mbps

Pol : Vertical

Detector : Average

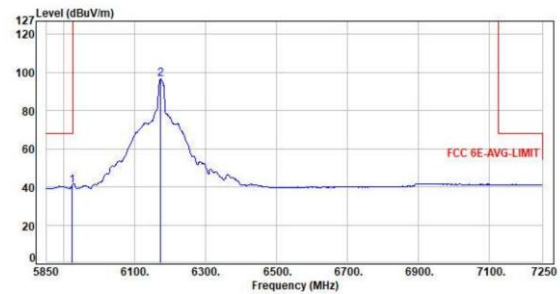

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	39.57	40.49	68.20	-27.71	Average	100	40	P
2	6172.00	1.77	94.94	96.71	200.00	-103.29	Average	100	40	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH45 6Mbps

Pol : Horizontal

Detector : Peak

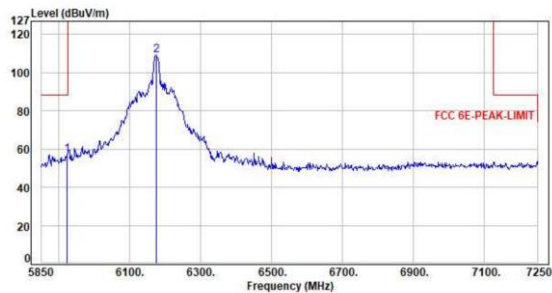

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	56.25	57.17	88.20	-31.03	Peak	100	40	P
2	6174.00	1.79	107.34	109.13	200.00	-90.87	Peak	100	40	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH45 6Mbps

Pol : Horizontal

Detector : Average

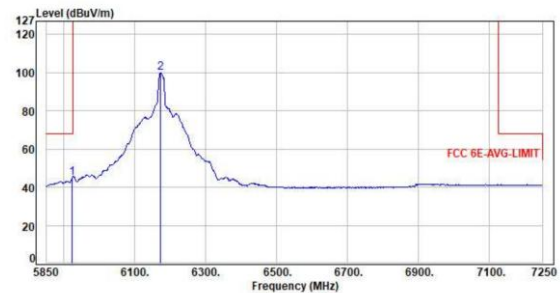

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	44.07	44.99	68.20	-23.21	Average	100	40	P
2	6172.00	1.77	98.38	100.15	200.00	-99.85	Average	100	40	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH93 6Mbps

Pol : Vertical

Detector : Peak

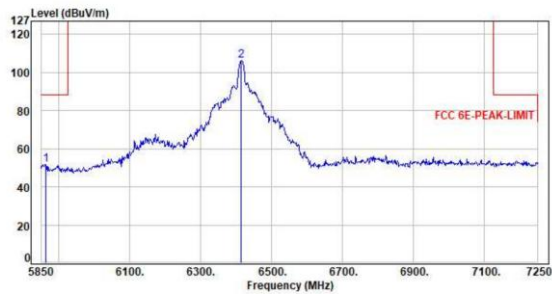

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5862.60	1.00	50.82	51.82	88.20	-36.38	Peak	100	39	P
2	6414.20	3.13	103.14	106.27	200.00	-93.73	Peak	100	39	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH93 6Mbps

Pol : Vertical

Detector : Average

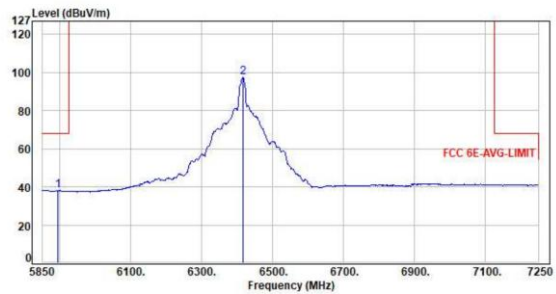

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5894.80	0.93	37.31	38.24	68.20	-29.96	Average	100	39	P
2	6415.60	3.13	94.20	97.33	200.00	-102.67	Average	100	39	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH93 6Mbps

Pol : Horizontal

Detector : Peak

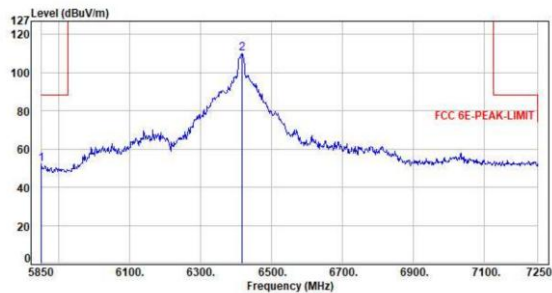

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	1.04	50.99	52.03	88.20	-36.17	Peak	100	38	P
2	6415.60	3.13	107.03	110.16	200.00	-89.84	Peak	100	38	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH93 6Mbps

Pol : Horizontal

Detector : Average

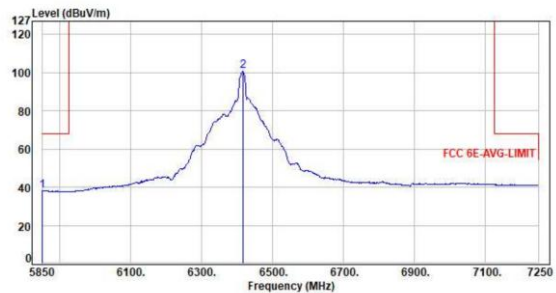

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	1.04	37.30	38.34	68.20	-29.86	Average	100	38	P
2	6415.60	3.13	97.64	100.77	200.00	-99.23	Average	100	38	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH97 6Mbps

Pol : Vertical

Detector : Peak

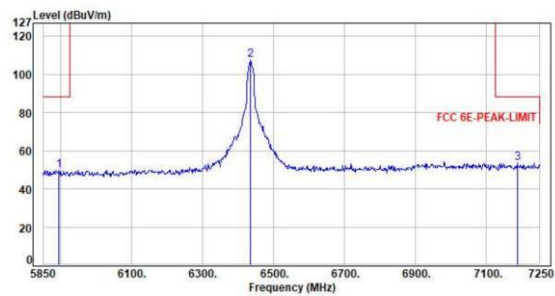

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5894.80	0.93	48.98	49.91	88.20	-38.29	Peak	100	60	P
2	6433.80	3.21	104.52	107.73	200.00	-92.27	Peak	100	60	P
3	7187.00	3.82	49.65	53.47	88.20	-34.73	Peak	100	60	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH97 6Mbps

Pol : Horizontal

Detector : Peak

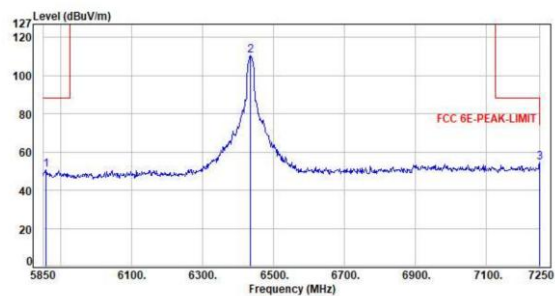

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5858.40	1.01	49.77	50.78	88.20	-37.42	Peak	100	38	P
2	6433.80	3.21	107.43	110.64	200.00	-89.36	Peak	100	38	P
3	7248.60	3.93	50.59	54.52	88.20	-33.68	Peak	100	38	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH105 6Mbps

Pol : Vertical

Detector : Peak

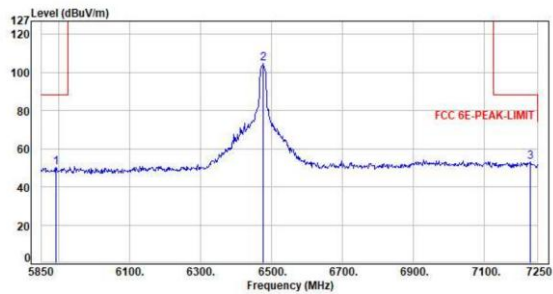

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5892.00	0.95	49.21	50.16	88.20	-38.04	Peak	100	70	P
2	6477.20	3.32	101.26	104.58	200.00	-95.42	Peak	100	70	P
3	7227.60	3.98	49.24	53.14	88.20	-35.06	Peak	100	70	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH105 6Mbps

Pol : Horizontal

Detector : Peak

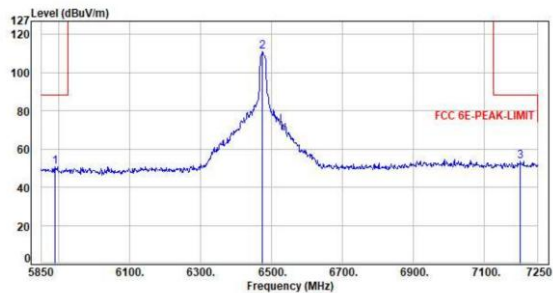

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	49.79	50.74	88.20	-37.46	Peak	100	145	P
2	6474.40	3.33	107.61	110.94	200.00	-89.06	Peak	100	145	P
3	7201.00	3.85	49.80	53.65	88.20	-34.55	Peak	100	145	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH113 6Mbps

Pol : Vertical

Detector : Peak

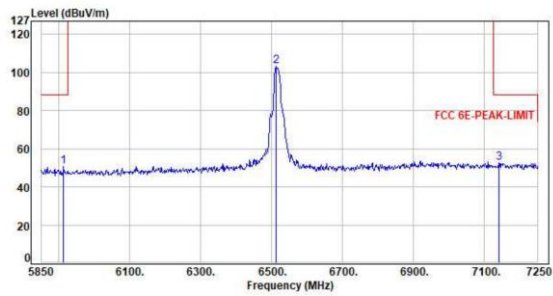

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5913.60	0.93	49.77	50.70	88.20	-37.50	Peak	100	219	P
2	6513.60	3.38	100.00	103.38	200.00	-96.62	Peak	100	219	P
3	7140.80	3.77	48.83	52.60	88.20	-35.60	Peak	100	219	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH113 6Mbps

Pol : Horizontal

Detector : Peak

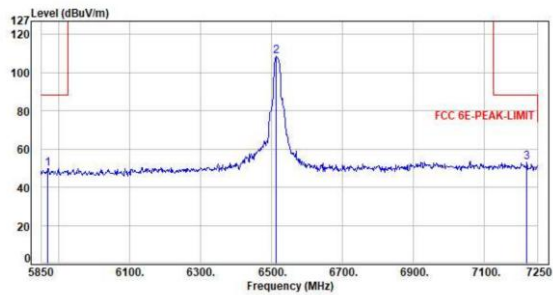

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5869.60	0.99	48.92	49.91	88.20	-38.29	Peak	100	143	P
2	6513.60	3.38	105.24	108.62	200.00	-91.38	Peak	100	143	P
3	7219.20	3.88	49.38	53.26	88.20	-34.94	Peak	100	143	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH117 6Mbps

Pol : Vertical

Detector : Peak

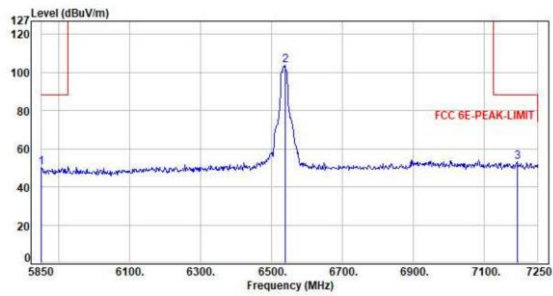

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5851.40	1.04	49.13	50.17	88.20	-38.03	Peak	100	219	P
2	6537.40	3.37	100.24	103.61	200.00	-96.39	Peak	100	219	P
3	7191.20	3.83	49.12	52.95	88.20	-35.25	Peak	100	219	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH117 6Mbps

Pol : Horizontal

Detector : Peak

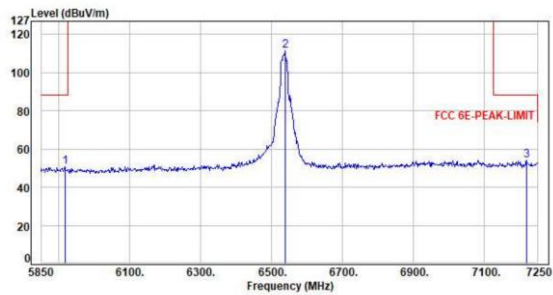

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5917.20	0.93	49.81	50.74	88.20	-37.46	Peak	100	144	P
2	6537.40	3.37	108.28	111.65	200.00	-88.35	Peak	100	144	P
3	7217.80	3.88	50.27	54.15	88.20	-34.05	Peak	100	144	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH153 6Mbps

Pol : Vertical

Detector : Peak

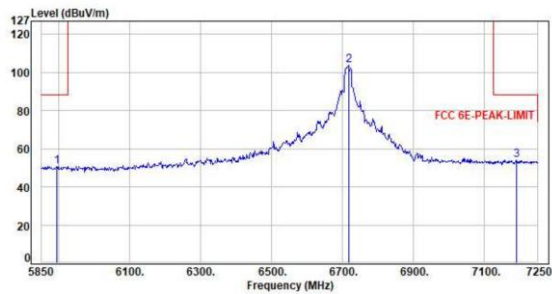

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5894.80	0.93	49.86	50.79	88.20	-37.41	Peak	103	59	P
2	6716.60	3.51	100.25	103.76	200.00	-96.24	Peak	103	59	P
3	7189.80	3.83	50.25	54.08	88.20	-34.12	Peak	103	59	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH153 6Mbps

Pol : Horizontal

Detector : Peak

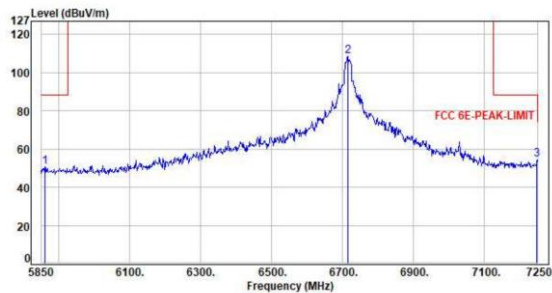

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5859.80	1.01	49.90	50.91	88.20	-37.29	Peak	100	230	P
2	6713.80	3.52	105.19	108.71	200.00	-91.29	Peak	100	230	P
3	7248.00	3.93	50.66	54.59	88.20	-33.61	Peak	100	230	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH181 6Mbps

Pol : Vertical

Detector : Peak

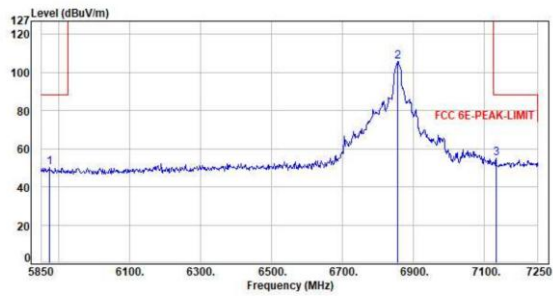

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5873.00	0.98	49.05	50.03	88.20	-38.17	Peak	400	87	P
2	6853.00	3.60	102.30	105.90	200.00	-94.10	Peak	400	87	P
3	7132.40	3.78	51.48	55.26	88.20	-32.94	Peak	400	87	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH181 6Mbps

Pol : Horizontal

Detector : Peak

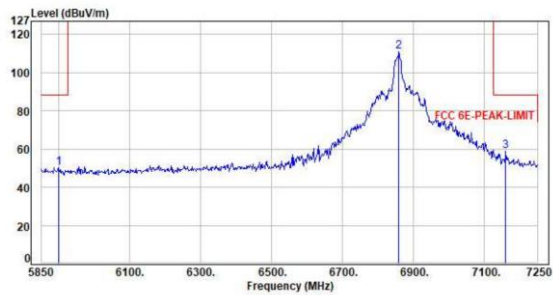

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5899.00	0.93	49.43	50.36	88.20	-37.84	Peak	100	230	P
2	6858.00	3.60	107.46	111.06	200.00	-88.94	Peak	100	230	P
3	7159.00	3.79	55.07	58.86	88.20	-29.34	Peak	100	230	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH189 6Mbps

Pol : Vertical

Detector : Peak

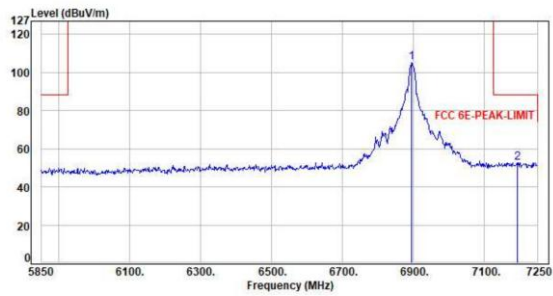

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6894.40	3.75	101.45	105.20	200.00	-94.80	Peak	100	103	P
2	7191.20	3.83	48.95	52.78	88.20	-35.42	Peak	100	103	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH189 6Mbps

Pol : Horizontal

Detector : Peak

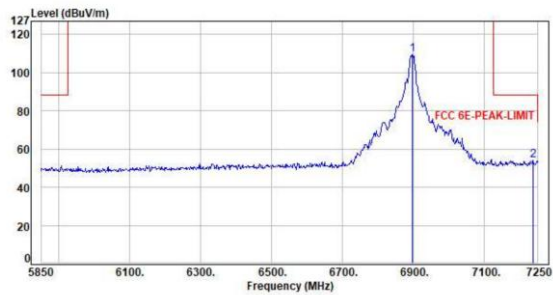

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6897.20	3.75	105.91	109.66	200.00	-90.34	Peak	100	231	P
2	7236.00	3.90	50.33	54.23	88.20	-33.97	Peak	100	231	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH213 6Mbps

Pol : Vertical

Detector : Peak

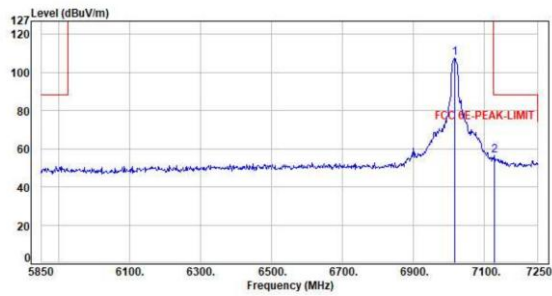

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7014.80	3.66	104.04	107.70	200.00	-92.30	Peak	100	109	P
2	7128.20	3.78	52.63	56.41	88.20	-31.79	Peak	100	109	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH213 6Mbps

Pol : Horizontal

Detector : Peak

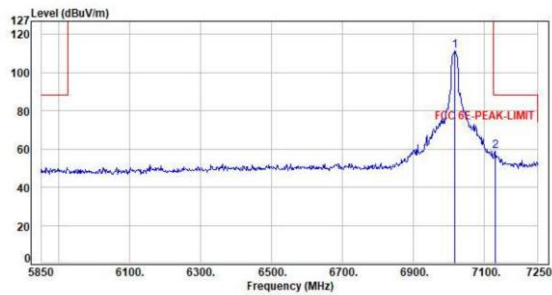

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7016.20	3.65	107.78	111.43	200.00	-88.57	Peak	123	232	P
2	7129.60	3.78	55.11	58.89	88.20	-29.31	Peak	123	232	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH229 6Mbps

Pol : Vertical

Detector : Peak

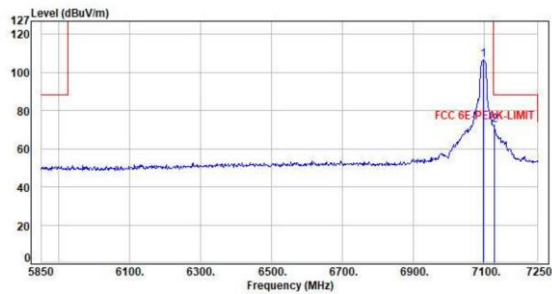


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7097.40	3.78	102.92	106.70	200.00	-93.30	Peak	100	109	P
2	7126.00	3.78	68.50	72.28	88.20	-15.92	Peak	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH229 6Mbps

Pol : Vertical

Detector : Average

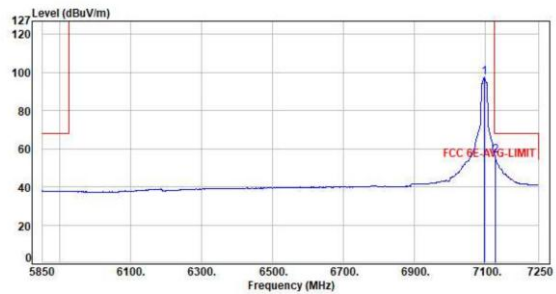


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7096.00	3.78	93.54	97.32	200.00	-102.68	Average	100	109	P
2	7126.00	3.78	52.88	56.66	88.20	-11.54	Average	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH229 6Mbps

Pol : Horizontal

Detector : Peak

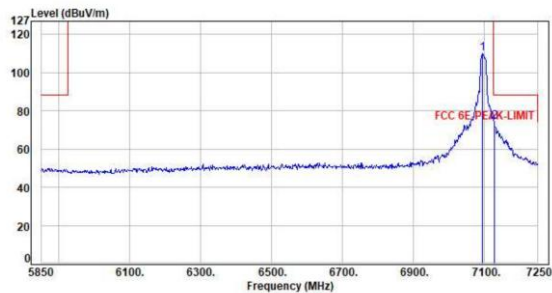


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7093.20	3.79	106.46	110.25	200.00	-89.75	Peak	100	234	P
2	7126.00	3.78	70.52	74.30	88.20	-13.90	Peak	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH229 6Mbps

Pol : Horizontal

Detector : Average

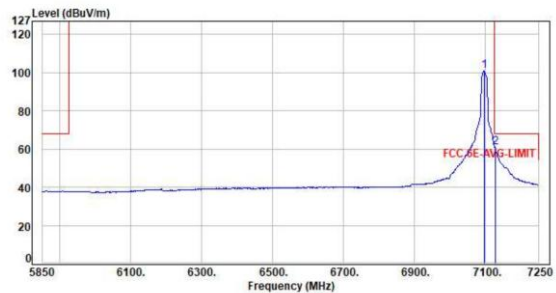

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7096.00	3.78	97.11	100.89	200.00	-99.11	Average	100	234	P
2	7126.00	3.78	56.83	60.61	88.20	-7.59	Average	100	234	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH233 6Mbps

Pol : Vertical

Detector : Peak

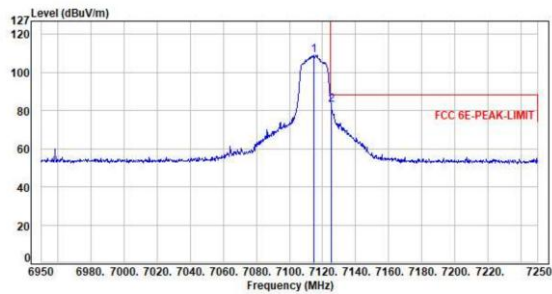

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7114.70	3.79	105.41	109.20	200.00	-90.80	Peak	315	113	P
2	7125.20	3.78	79.37	83.15	88.20	-5.05	Peak	315	113	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH233 6Mbps

Pol : Vertical

Detector : Average

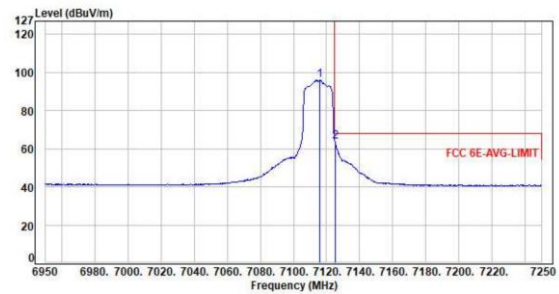

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.60	3.78	92.35	96.13	200.00	-103.87	Average	315	113	P
2	7125.20	3.78	59.82	63.60	68.20	-4.60	Average	315	113	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH233 6Mbps

Pol : Horizontal

Detector : Peak

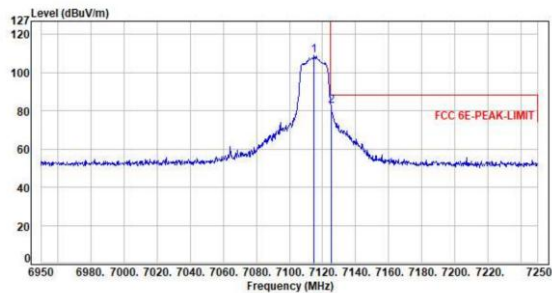

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	3.78	105.28	109.06	200.00	-90.94	Peak	100	232	P
2	7125.20	3.78	78.76	82.54	88.20	-5.66	Peak	100	232	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH233 6Mbps

Pol : Horizontal

Detector : Average

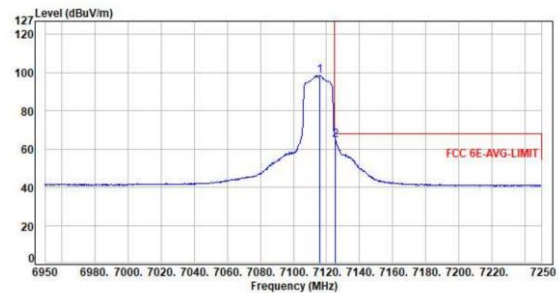

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.90	3.78	94.82	98.60	200.00	-101.40	Average	100	232	P
2	7125.50	3.78	61.15	64.93	68.20	-3.27	Average	100	232	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH185 6Mbps

Pol : Vertical

Detector : Peak

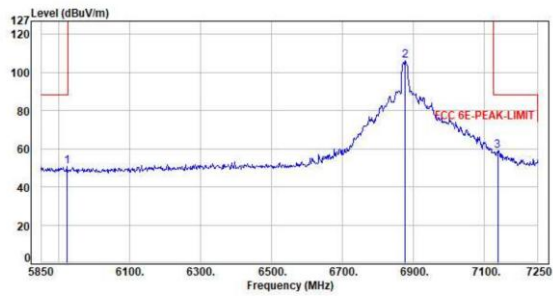

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	49.78	50.70	88.20	-37.50	Peak	100	107	P
2	6876.20	3.66	102.59	106.25	200.00	-93.75	Peak	100	107	P
3	7136.60	3.77	55.01	58.78	88.20	-29.42	Peak	100	107	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH185 6Mbps

Pol : Horizontal

Detector : Peak

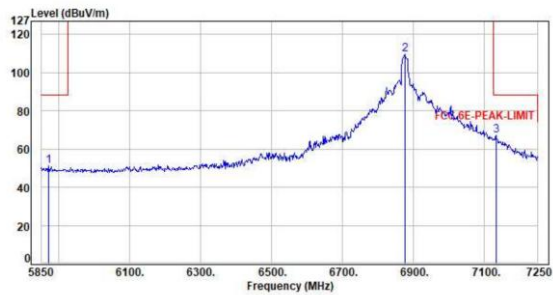

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5872.40	0.99	50.28	51.27	88.20	-36.93	Peak	100	232	P
2	6874.80	3.67	106.05	109.72	200.00	-90.28	Peak	100	232	P
3	7132.40	3.78	63.38	67.16	88.20	-21.04	Peak	100	232	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Vertical Detector : Peak

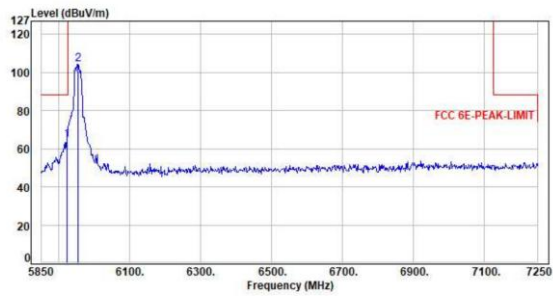

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	63.59	64.51	88.20	-23.69	Peak	100	42	P
2	5953.60	0.92	103.55	104.47	200.00	-95.53	Peak	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Vertical Detector : Average

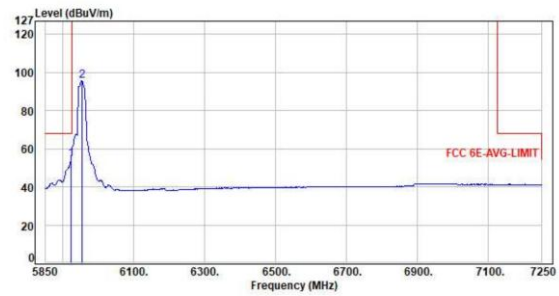

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	53.62	54.74	68.20	-13.46	Average	100	42	P
2	5953.60	0.92	94.92	95.84	200.00	-104.16	Average	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Peak

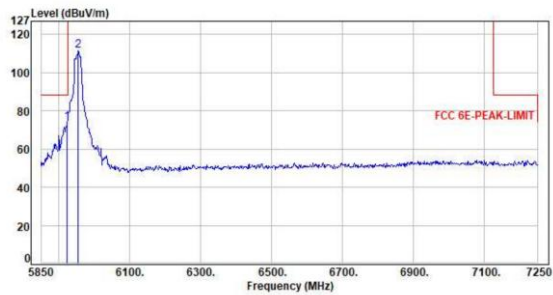

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	72.79	73.71	88.20	-14.49	Peak	100	47	P
2	5955.00	0.92	110.47	111.39	200.00	-88.61	Peak	100	47	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Average

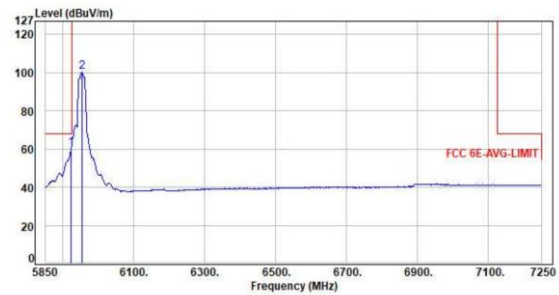


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5924.20	0.92	59.65	60.57	68.20	-7.63	Average	100	47	P
2	5955.00	0.92	99.31	100.23	200.00	-99.77	Average	100	47	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Pol : Vertical Detector : Peak

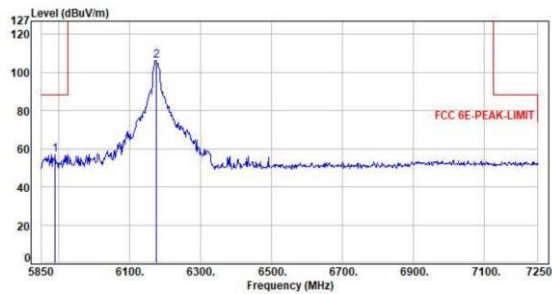

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5890.60	0.95	56.06	57.01	88.20	-31.19	Peak	100	41	P
2	6174.00	1.79	104.42	106.21	200.00	-93.79	Peak	100	41	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Pol : Vertical Detector : Average

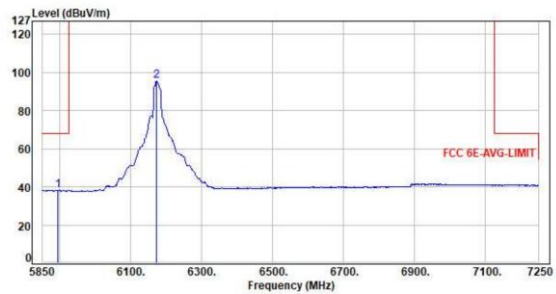

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5894.80	0.93	37.34	38.27	68.20	-29.93	Average	100	41	P
2	6172.00	1.77	93.66	95.43	200.00	-104.57	Average	100	41	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Pol : Horizontal Detector : Peak

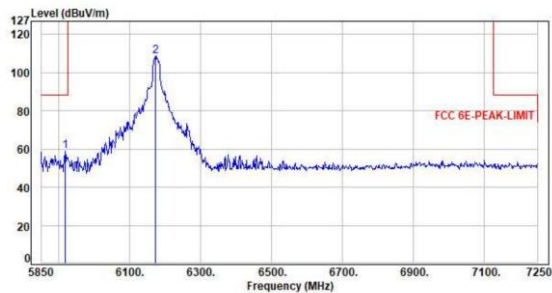

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	57.79	58.72	88.20	-29.48	Peak	100	44	P
2	6172.00	1.77	106.93	108.70	200.00	-91.30	Peak	100	44	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Pol : Horizontal Detector : Average

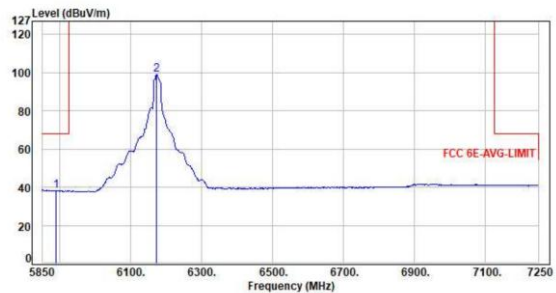


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	37.33	38.28	68.20	-29.92	Average	100	44	P
2	6172.00	1.77	97.08	98.85	200.00	-101.15	Average	100	44	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Pol : Vertical Detector : Peak

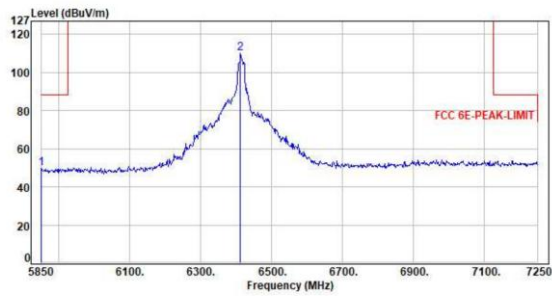

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5851.40	1.04	48.81	49.85	88.20	-38.35	Peak	100	97	P
2	6411.40	3.11	106.88	109.99	200.00	-90.01	Peak	100	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Pol : Vertical Detector : Average

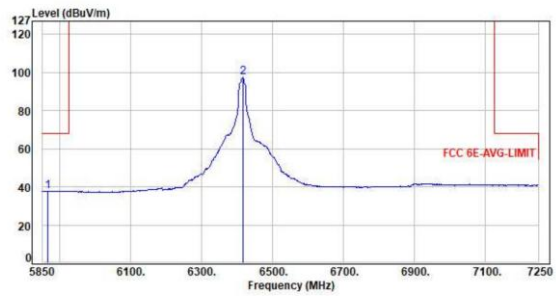

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5866.00	1.01	36.87	37.88	88.20	-50.32	Average	100	97	P
2	6415.60	3.13	94.23	97.36	200.00	-102.64	Average	100	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Pol : Horizontal Detector : Peak

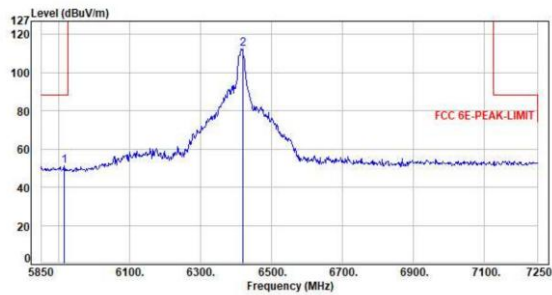

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	50.34	51.27	88.20	-36.93	Peak	100	43	P
2	6418.40	3.14	109.43	112.57	200.00	-87.43	Peak	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Pol : Horizontal Detector : Average

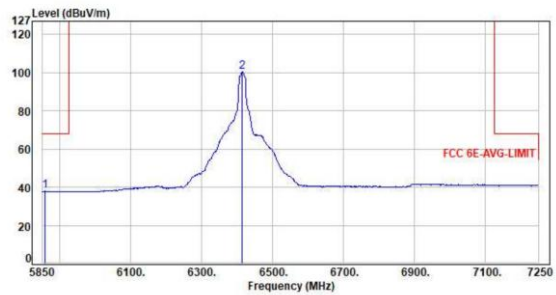


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5858.40	1.01	36.90	37.91	88.20	-50.29	Average	100	43	P
2	6414.20	3.13	97.46	100.59	200.00	-99.41	Average	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Pol : Vertical Detector : Peak

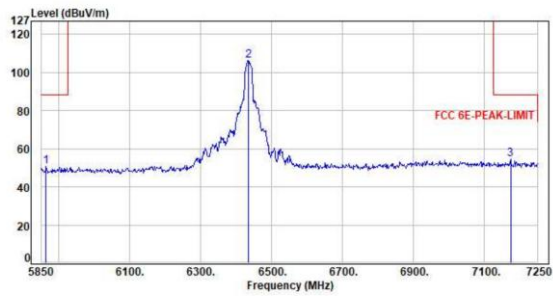

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5854.00	1.01	49.68	50.69	88.20	-37.51	Peak	394	213	P
2	6433.00	3.21	103.15	106.36	200.00	-93.64	Peak	394	213	P
3	7173.00	3.81	50.58	54.39	88.20	-33.81	Peak	394	213	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Pol : Horizontal Detector : Peak

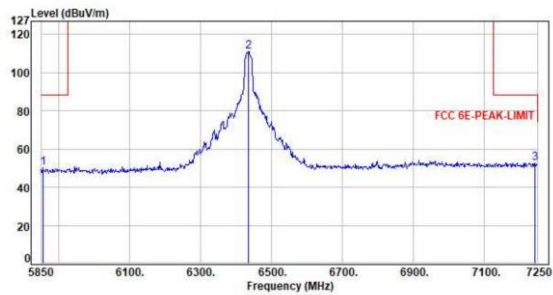


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5855.60	1.03	49.00	50.03	88.20	-38.17	Peak	100	144	P
2	6433.80	3.21	107.85	111.06	200.00	-88.94	Peak	100	144	P
3	7241.60	3.91	48.92	52.83	88.20	-35.37	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Pol : Vertical Detector : Peak

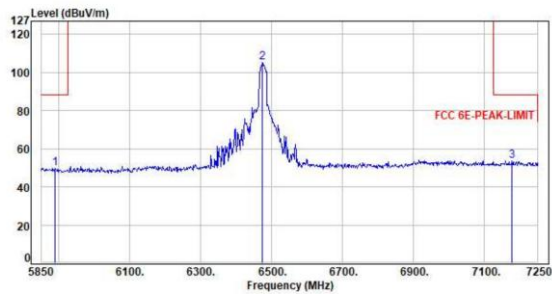

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5890.60	0.95	49.02	49.97	88.20	-38.23	Peak	100	74	P
2	6474.40	3.33	101.74	105.07	200.00	-94.93	Peak	100	74	P
3	7177.20	3.81	49.83	53.64	88.20	-34.56	Peak	100	74	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Pol : Horizontal Detector : Peak

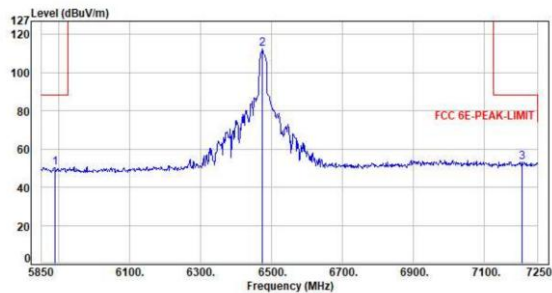


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	49.48	50.43	88.20	-37.77	Peak	114	230	P
2	6474.40	3.33	109.39	112.72	200.00	-87.28	Peak	114	230	P
3	7205.20	3.85	49.33	53.18	88.20	-35.02	Peak	114	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Pol : Vertical Detector : Peak

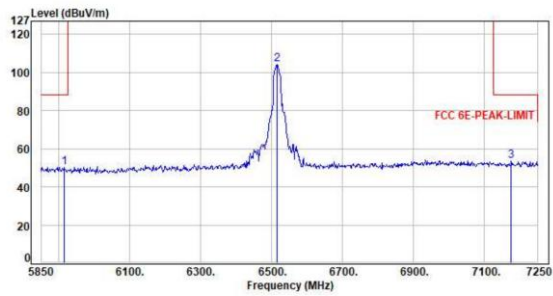

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	49.52	50.45	88.20	-37.75	Peak	100	220	P
2	6515.00	3.38	101.02	104.40	200.00	-95.60	Peak	100	220	P
3	7174.40	3.81	49.60	53.41	88.20	-34.79	Peak	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Pol : Horizontal Detector : Peak

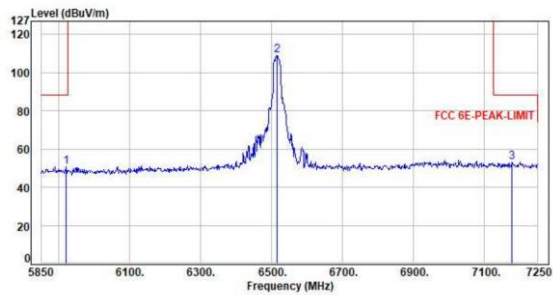


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	49.86	50.78	88.20	-37.42	Peak	100	144	P
2	6515.00	3.38	105.85	109.23	200.00	-90.77	Peak	100	144	P
3	7177.20	3.81	49.25	53.06	88.20	-35.14	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Pol : Vertical Detector : Peak

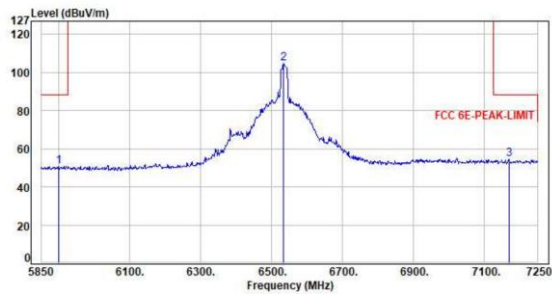

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5899.00	0.93	49.81	50.74	88.20	-37.46	Peak	100	57	P
2	6533.20	3.37	101.18	104.55	200.00	-95.45	Peak	100	57	P
3	7168.00	3.80	50.55	54.35	88.20	-33.85	Peak	100	57	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Pol : Horizontal Detector : Peak

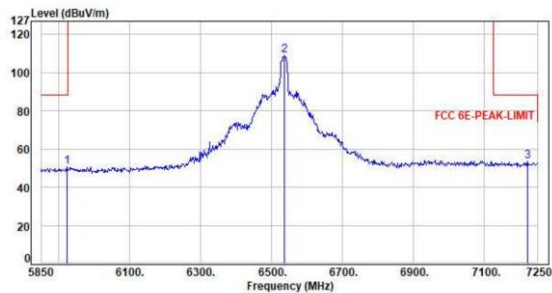


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.00	0.92	49.70	50.62	88.20	-37.58	Peak	100	144	P
2	6536.00	3.37	105.81	109.18	200.00	-90.82	Peak	100	144	P
3	7222.00	3.88	49.80	53.68	88.20	-34.52	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Pol : Vertical Detector : Peak

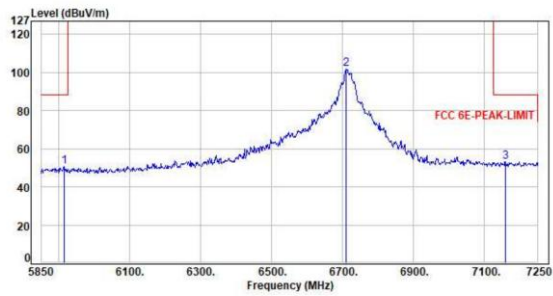

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	49.60	50.53	88.20	-37.67	Peak	100	59	P
2	6700.00	3.52	98.24	101.76	200.00	-98.24	Peak	100	59	P
3	7159.00	3.79	49.46	53.25	88.20	-34.95	Peak	100	59	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Pol : Horizontal Detector : Peak

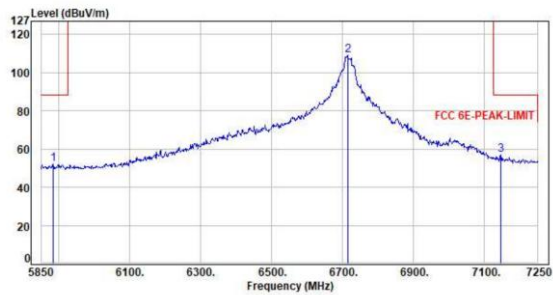


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5885.00	0.96	51.13	52.09	88.20	-36.11	Peak	100	230	P
2	6700.00	3.52	105.63	109.15	200.00	-90.85	Peak	100	230	P
3	7145.00	3.78	53.21	56.99	88.20	-31.21	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Pol : Vertical Detector : Peak

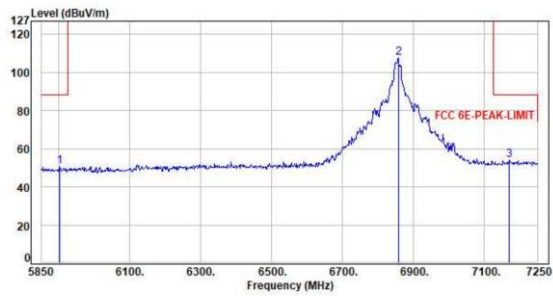

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5983.20	0.93	49.87	50.80	88.20	-37.40	Peak	108	87	P
2	6856.60	3.60	104.05	107.65	200.00	-92.35	Peak	108	87	P
3	7170.20	3.80	50.49	54.29	88.20	-33.91	Peak	108	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Pol : Horizontal Detector : Peak

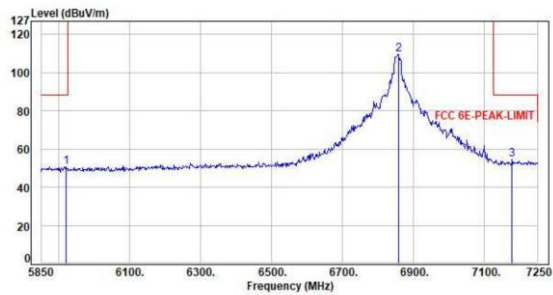


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	50.00	50.92	88.20	-37.28	Peak	100	230	P
2	6856.60	3.60	106.23	109.83	200.00	-90.17	Peak	100	230	P
3	7177.20	3.81	50.70	54.51	88.20	-33.69	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Pol : Vertical Detector : Peak

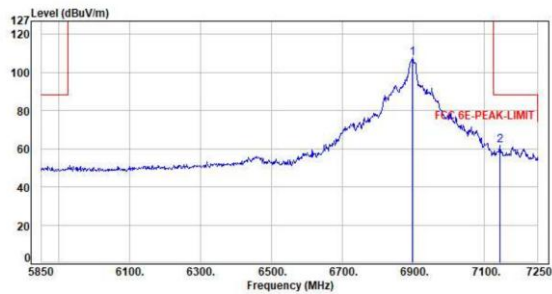

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6897.20	3.75	103.92	107.67	200.00	-92.33	Peak	111	88	P
2	7142.20	3.78	57.85	61.63	88.20	-26.57	Peak	111	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Pol : Vertical Detector : Average

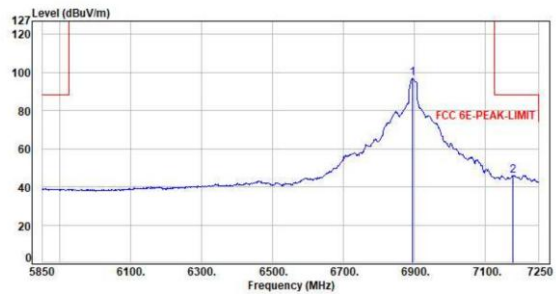

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6894.40	3.75	93.12	96.87	200.00	-103.13	Average	111	88	P
2	7177.20	3.81	42.21	46.02	88.20	-42.18	Average	111	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Pol : Horizontal Detector : Peak

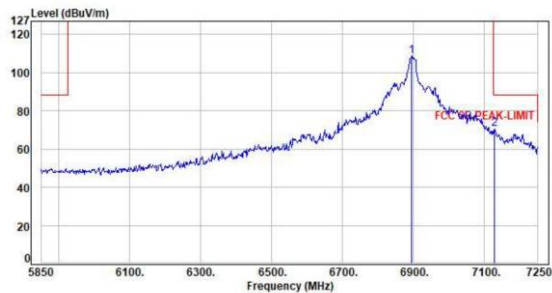

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6894.40	3.75	105.05	108.80	200.00	-91.20	Peak	100	232	P
2	7128.20	3.78	66.91	70.69	88.20	-17.51	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Pol : Horizontal Detector : Average

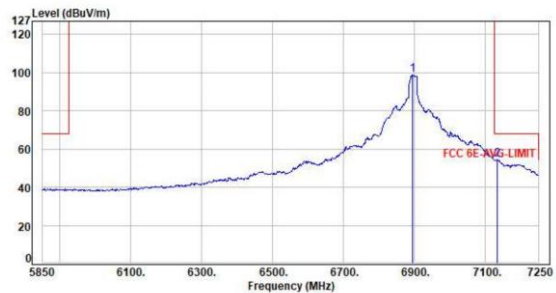


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6893.00	3.74	95.23	98.97	200.00	-101.03	Average	100	232	P
2	7133.00	3.78	50.76	54.54	88.20	-13.66	Average	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Pol : Vertical Detector : Peak

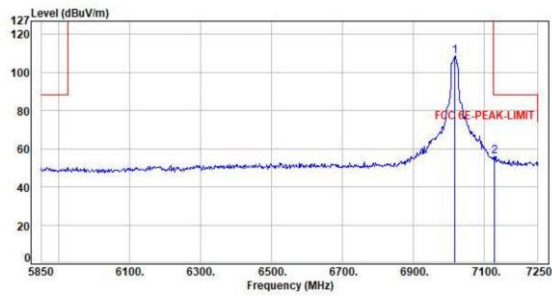

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7016.20	3.65	105.13	108.78	200.00	-91.22	Peak	100	109	P
2	7126.80	3.78	52.23	56.01	88.20	-32.19	Peak	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Pol : Horizontal Detector : Peak

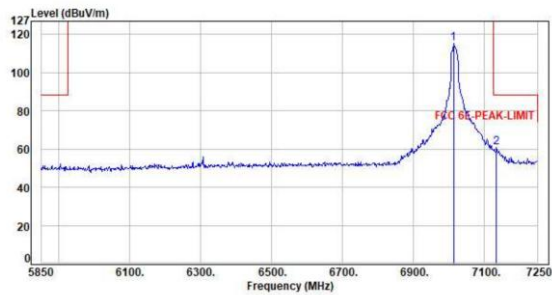


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7012.00	3.65	111.80	115.45	200.00	-84.55	Peak	115	231	P
2	7133.80	3.78	57.25	61.03	88.20	-27.17	Peak	115	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Pol : Vertical Detector : Peak

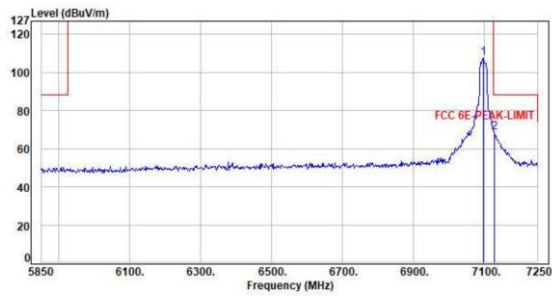

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7096.00	3.78	103.99	107.77	200.00	-92.23	Peak	100	110	P
2	7126.00	3.78	64.92	68.70	88.20	-19.50	Peak	100	110	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Pol : Vertical Detector : Average

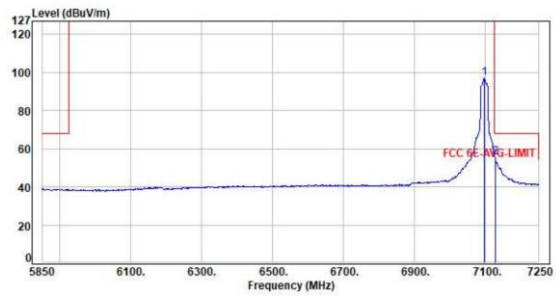

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7096.00	3.78	93.29	97.07	200.00	-102.93	Average	100	110	P
2	7126.00	3.78	51.58	55.36	88.20	-12.84	Average	100	110	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Pol : Horizontal Detector : Peak

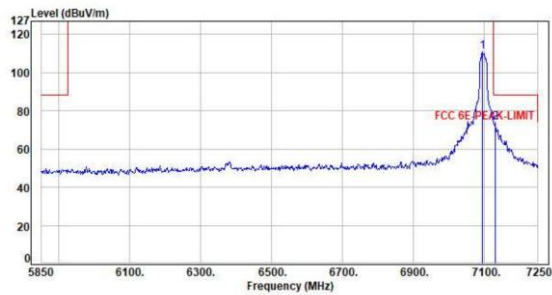

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7093.20	3.79	107.42	111.21	200.00	-88.79	Peak	100	233	P
2	7129.60	3.78	69.99	73.77	88.20	-14.43	Peak	100	233	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Pol : Horizontal Detector : Average

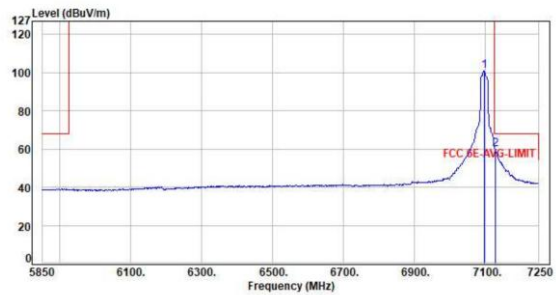


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7096.00	3.78	97.33	101.11	200.00	-98.89	Average	100	233	P
2	7126.00	3.78	55.88	59.66	88.20	-8.54	Average	100	233	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Pol : Vertical Detector : Peak

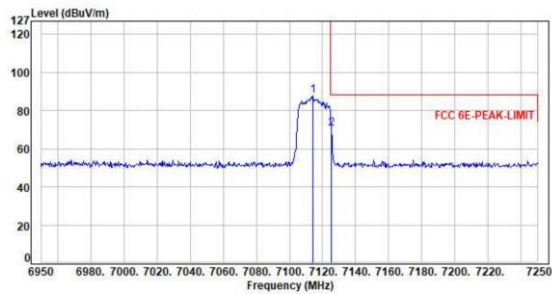

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7112.90	3.79	84.13	87.92	88.20	-112.08	Peak	100	110	P
2	7125.20	3.78	66.82	70.60	88.20	-17.60	Peak	100	110	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Pol : Vertical Detector : Average

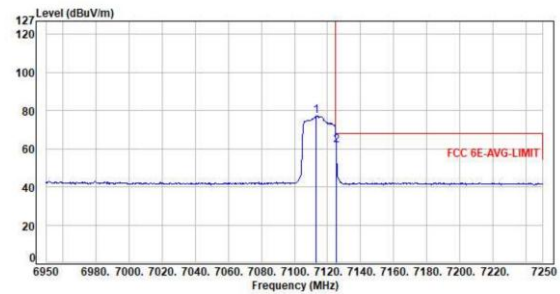

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7112.90	3.79	73.56	77.35	68.20	-122.65	Average	100	110	P
2	7125.20	3.78	57.87	61.65	68.20	-6.55	Average	100	110	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Pol : Horizontal Detector : Peak

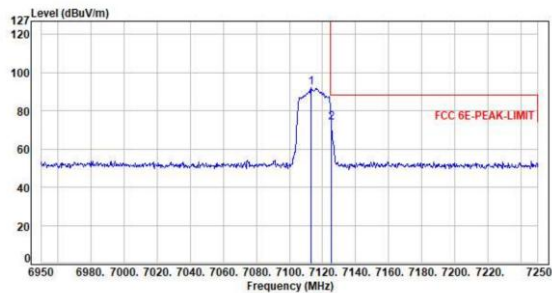

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7112.90	3.79	88.23	92.02	88.20	-107.98	Peak	100	232	P
2	7125.20	3.78	70.17	73.95	88.20	-14.25	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Pol : Horizontal Detector : Average

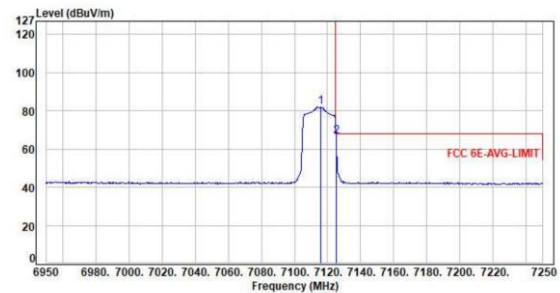


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7112.90	3.78	78.25	82.03	68.20	-117.97	Average	100	232	P
2	7125.20	3.78	62.88	66.66	68.20	-1.54	Average	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Pol : Vertical Detector : Peak

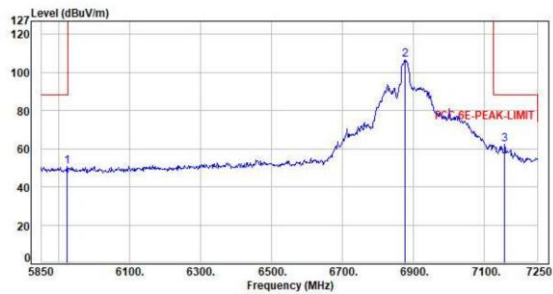

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	49.78	50.70	88.20	-37.50	Peak	100	88	P
2	6874.80	3.67	102.82	106.49	200.00	-93.51	Peak	100	88	P
3	7156.20	3.77	58.68	62.45	88.20	-25.75	Peak	100	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Pol : Horizontal Detector : Peak

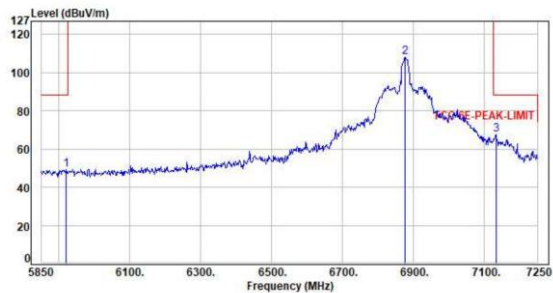


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	48.26	49.18	88.20	-39.02	Peak	100	231	P
2	6874.80	3.67	104.47	108.14	200.00	-91.86	Peak	100	231	P
3	7132.40	3.78	63.80	67.58	88.20	-20.62	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Pol : Vertical Detector : Peak

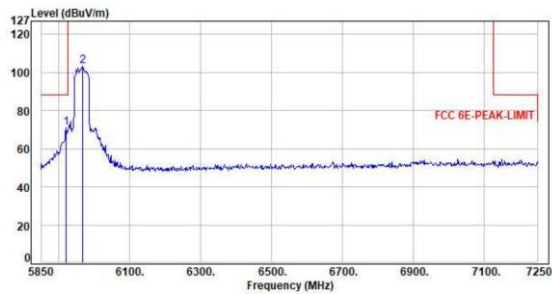

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	69.99	70.91	88.20	-17.29	Peak	100	43	P
2	5966.20	0.92	102.18	103.10	200.00	-96.90	Peak	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Pol : Vertical Detector : Average

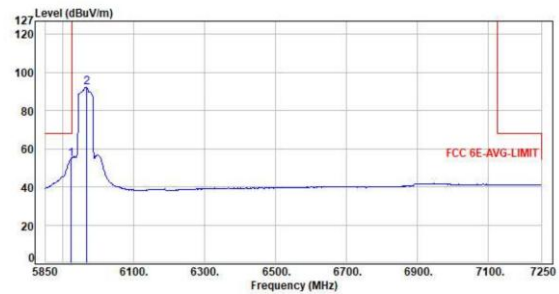

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	53.61	54.73	68.20	-13.47	Average	100	43	P
2	5966.20	0.92	91.43	92.35	200.00	-107.65	Average	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Pol : Horizontal Detector : Peak

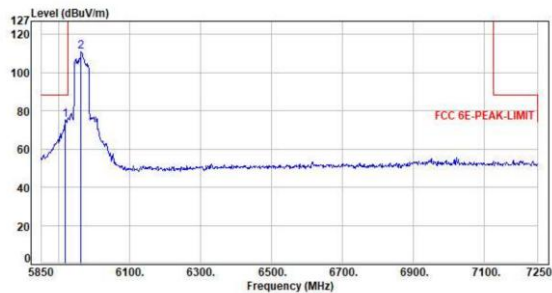

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	74.57	75.50	88.20	-12.70	Peak	100	47	P
2	5963.40	0.92	110.01	110.93	200.00	-89.07	Peak	100	47	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Pol : Horizontal Detector : Average

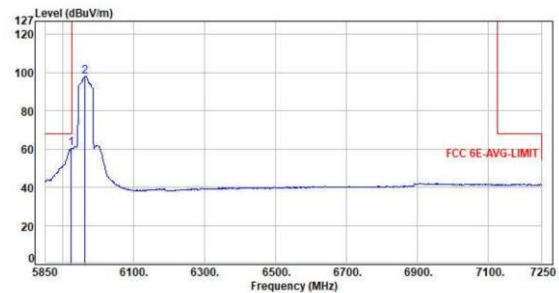


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	59.65	60.57	68.20	-7.63	Average	100	47	P
2	5963.40	0.92	97.21	98.13	200.00	-101.87	Average	100	47	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Pol : Vertical Detector : Peak

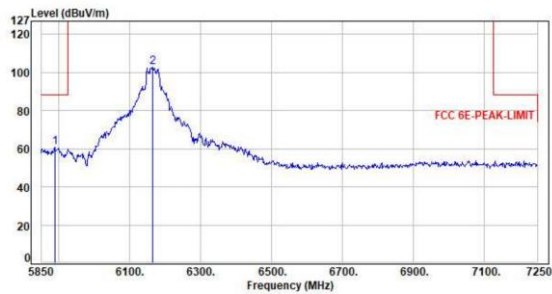

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	60.09	61.04	88.20	-27.16	Peak	100	40	P
2	6165.00	1.72	101.06	102.78	200.00	-97.22	Peak	100	40	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Pol : Vertical Detector : Average

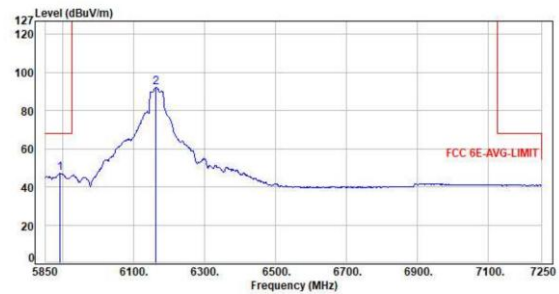

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5892.00	0.95	46.14	47.09	68.20	-21.11	Average	100	40	P
2	6162.20	1.70	90.66	92.36	200.00	-107.64	Average	100	40	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Pol : Horizontal Detector : Peak

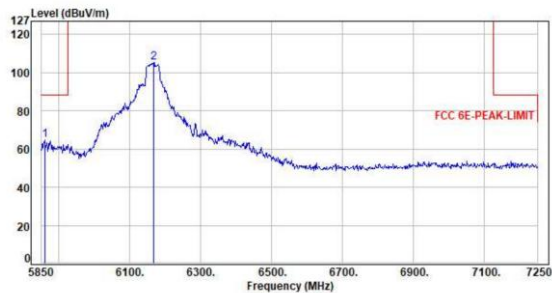

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5859.00	1.01	63.83	64.84	88.20	-23.36	Peak	100	39	P
2	6166.40	1.73	103.68	105.41	200.00	-94.59	Peak	100	39	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Pol : Horizontal Detector : Average

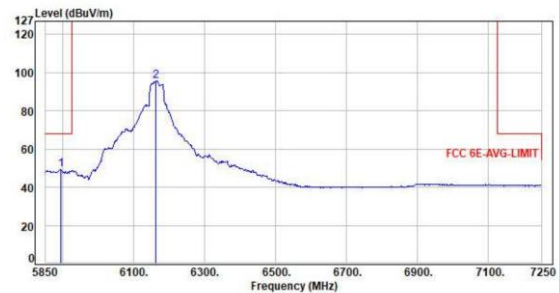

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5894.00	0.93	48.49	49.42	68.20	-18.78	Average	100	39	P
2	6162.20	1.70	94.03	95.73	200.00	-104.27	Average	100	39	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor