



FCC RADIO TEST REPORT

Applicant : Elo Touch Solutions, Inc.
Address : 670 N. McCarthy Blvd., Suite 100, Milpitas,
CA 95035, USA
Equipment : Touch All-in-One Computer
Model No. : ESY14I2A
Trade Name : Elo or **elo**
FCC ID. : RBWESY14I2A

I HEREBY CERTIFY THAT :

The sample was received on Apr. 22, 2026 and the testing was completed on May 24, 2026 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test	6
2.2 Carrier Frequency of Channels	8
2.3 Test Mode and Test Software	9
2.4 Description of Test System	10
2.5 General Information of Test	11
2.6 Measurement Uncertainty	11
3. Test Equipment and Ancillaries Used for Tests	12
4. Antenna Requirements	14
4.1 Standard Applicable	14
4.2 Antenna Construction and Directional Gain	14
5. Test of AC Power Line Conducted Emission	15
5.1 Test Limit	15
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data	17
5.5 Test Photographs	19
6. Test of Radiated Spurious Emission	20
6.1 Test Limit	20
6.2 Test Procedures	21
6.3 Typical Test Setup	22
6.4 Test Result and Data (9KHz ~ 30MHz)	23
6.5 Test Result and Data (30MHz ~ 1GHz)	23
6.6 Test Result and Data (Bandedge)	25
6.7 Test Result and Data (1GHz ~ 3GHz)	37
6.8 Test Result and Data (3GHz ~ 18GHz)	49
6.9 Test Result and Data (18GHz ~ 25GHz)	61
6.10 Restricted Bands of Operation	62
6.11 Test Photographs (30MHz ~ 1GHz)	63
6.12 Test Photographs (Above 1GHz)	64
7. Test of Conducted Spurious Emission	66
7.1 Test Limit	66
7.2 Test Procedure	66
7.3 Test Setup Layout	66
7.4 Test Result and Data	66
8. On Time, Duty Cycle and Measurement methods	75
8.1 Test Limit	75
8.2 Test Procedure	75
8.3 Test Setup Layout	75
8.4 Test Result and Data	75



9.	6dB Bandwidth Measurement Data	77
9.1	Test Limit	77
9.2	Test Procedures	77
9.3	Test Setup Layout	77
9.4	Test Result and Data	77
10.	Maximum Average Output Power	80
10.1	Test Limit	80
10.2	Test Procedures	80
10.3	Test Setup Layout	80
10.4	Test Result and Data	80
11.	Power Spectral Density	83
11.1	Test Limit	83
11.2	Test Procedures	83
11.3	Test Setup Layout	83
11.4	Test Result and Data	83



History of this test report

Report No.	Issued Date	Description
26030518-TRFCC01	Jun. 11, 2026	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Maximum Peak and Average Output Power	PASS
15.247(e)	. Power Spectral Density	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	BT/BLE: 2400MHz-2483.5MHz 802.11b/g/n/ax: 2400MHz-2483.5MHz 802.11a/n/ac/ax: 5150MHz-5250MHz, 5250MHz-5350MHz, 5470MHz-5725MHz, 5725MHz-5850MHz 6GHz: 802.11a/ax: 5925MHz-6425MHz, 6425MHz-6525MHz, 6525MHz-6875MHz, 6875MHz-7125MHz
Center Frequency Range	BT/BLE: 2402MHz-2480MHz 802.11b/g/n/ax: 2412MHz-2462MHz 802.11a/n/ac/ax: 5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5720MHz, 5745MHz-5825MHz 6GHz: 802.11a/ax: 5955MHz-6415MHz, 6435MHz-6515MHz, 6535MHz-6855MHz, 6875MHz-7115MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 6GHz: 802.11a: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS, OFDMA
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps GFSK: 2Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ax: MCS0 – MCS11, HE20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80/160 802.11ax: MCS0 – MCS11, HE20/40/80/160 6GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ax: MCS0 – MCS11, HE20/40/80/160



Antenna Type	PIFA Antenna
Antenna Gain	BT: 2.91 dBi BLE: 2.91 dBi WLAN 2.4GHz: 2.91 dBi WLAN 5GHz: 5180MHz-5240MHz: 2.6 dBi 5260MHz-5320MHz: 1.56 dBi 5500MHz-5720MHz: 2.95 dBi 5745MHz-5825MHz: 3.08 dBi WLAN 6GHz: 5925MHz-6500MHz: 3.59 dBi 6400MHz-6600MHz: 3.59 dBi 6500MHz-6900MHz: 3.59 dBi 6800MHz-7125MHz: 2.89 dBi
KIT-PAY-MBY5500-DG-EDGE-USB-RRON	ELO \ Moby/5500M CL3
Panel	AUO \ A140HAN01.0 \ 14"
	K&D \ KD140N41-30NI-A003 \ 14"
Adapter	DELTA \ ADP-65JH HB \ 65W
	Billion \ BA070-190342MBX \ 65W

Note:

1. EUT support TPC Function.
2. EUT supports DFS Client Mode, without radar detection.
3. WLAN and BT can simultaneously transmission.
4. For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20, 802.11ax HE20 (2412MHz-2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40, 802.11ax HE40 (2422MHz-2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.

(For Above 1GHz)

Below test Channel generated the worst case, they were reported as the final data.

WiFi 2.4G	CH	Freq. (MHz)	Bandedge	1GHz ~ 3GHz	3GHz ~ 18GHz	18GHz ~ 25GHz
20MHz	1	2412	V	V	V	--
	6	2437	V	V	V	V
	11	2462	V	V	V	--
40MHz	3	2422	V	V	V	--
	6	2437	V	V	V	--
	9	2452	V	V	V	--



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- An executive program, "Qualcomm Radio Control Tool Ver.: 4" under Windows 10 system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode 1	EUT 1, TX Mode, Power from Adapter 1 (AC 120V/60Hz)
Test Mode 2	EUT 1, TX Mode, Power from Adapter 2 (AC 120V/60Hz)
Test Mode 3	EUT 2, TX Mode, Power from Adapter 2 (AC 120V/60Hz)
Test Mode 4	EUT 1, TX Mode, Power from Adapter 2 (AC 240V/60Hz)
caused "Test Mode 4" generated the worst case, it was reported as the final data.	
Radiated Emissions (30MHz ~ 1GHz)	
Test Mode 1	EUT 1, TX Mode, Power from Adapter 1 (AC 120V/60Hz)
Test Mode 2	EUT 1, TX Mode, Power from Adapter 2 (AC 120V/60Hz)
Test Mode 3	EUT 2, TX Mode, Power from Adapter 2 (AC 120V/60Hz)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiated Emissions (1GHz ~ 25GHz)	
Test Mode 1	EUT 1, TX Mode, Power from Adapter 1 (AC 120V/60Hz)
Use Item	
EUT 1	EUT with Panel: K&D \ KD140N41-30NI-A003 \ 14"
EUT 2	EUT with Panel: AUO \ A140HAN01.0 \ 14"
Adapter 1	DELTA \ ADP-65JH HB \ 65W
Adapter 2	Billion \ BA070-190342MBX \ 65W

Modulation Type	TX CONFIGURATION
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX
802.11n HT40	1TX
802.11ax HE20	1TX
802.11ax HE40	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	Lenovo	S2292L	N/A	Adapter / 1.8m / NS
USB Cable (A to A)	BENEVO	E210567AWM	N/A	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	Lenovo	S2292L	N/A	Adapter / 1.8m / NS
USB Cable (A to A)	BENEVO	E210567AWM	N/A	N/A



2.5 General Information of Test

Organization	CerpPASS Technology Corp.		
☒ Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881		
	FCC	TW1439, TW1079	
	ISED Company Number	4934E	
	ISED CAB identifier	TW1439	
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9kHz to 25,000MHz		
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.		

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON02-NK	2026/05/16	24.5°C / 47%	Leon Huang
Radiated Emissions	3M02-NK	2026/05/16	16.4°C / 55%	Leon Huang
Radiated Emissions	3M02-NK	2026/05/20	21.7°C / 50%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2026/05/24	25.7°C / 58%	Leon Huang

2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150kHz~30MHz)	±3.2dB
Radiated Spurious Emission(9kHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.2dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB
Conducted Spurious Emission	±2.1dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.5%
Occupied Bandwidth	±4.4%
Peak Output Power (Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±3.5%
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	VULB 9168-1947	2026/02/10	2027/02/09
Active Loop Antenna	Schwarzbeck	FMZB 1513	00414	2026/02/04	2027/02/03
Double Ridged Guide Horn Antenna	RF SPAN	DRH18-E	210309A18-ES	2025/08/22	2026/08/21
Horn Antenna	RF SPIN	DRH0844	KV2E20A0844	2026/03/26	2027/03/25
EMI Receiver	R&S	ESCI	101423	2025/07/10	2026/07/09
Spectrum Analyzer	R&S	FSV 40-N	102151	2025/08/18	2026/08/17
Preamplifier	EMC INSTRUMENTS	EMC118A45V1SS	981069	2025/12/18	2026/12/17
Preamplifier	EMC INSTRUMENTS	EMC184045SEE	981159	2026/04/02	2027/04/01
Preamplifier	EM Electronics corp.	EM330	60659	2025/12/18	2026/12/17
Cable-4m (9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
Cable-1m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-1000	260301	2026/04/10	2027/04/09
Cable-3m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-3000	260302	2026/04/10	2027/04/09
Cable-7m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-7000	260303	2026/04/10	2027/04/09
Cable-8m (10M-26.5G)	HUBER SUHNER	SF126E	587396/126E	2025/10/15	2026/10/14
Cable-3m (10M-26.5G)	HUBER SUHNER	SF126E	587399/126E	2025/10/15	2026/10/14
Cable-1m (1G-26.5G)	HUBER SUHNER	SF126E	589848/126E	2025/10/15	2026/10/14
Cable-1m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-1000	260304	2026/04/10	2027/04/09
Cable-3m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-3000	260305	2026/04/10	2027/04/09
Cable-7m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-7000	260306	2026/04/10	2027/04/09
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	WOKEN	WFIL-H3000-18000F-03	WR377WC2B1	2025/10/13	2026/10/12
Highpass Filter	WOKEN	WFIL-H7000-18000F-01	WR468FWC2B1	2025/10/03	2026/10/02
Hipass Filter	Warison	WFIL-H7500-18000F-01	WRO5CFWC2B1	2025/10/13	2026/10/12



Test Item	RF Conducted				
Test Site	RFCON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2025/10/23	2026/10/22
Power Meter	Anritsu	ML2495A	1224005	2026/01/27	2027/01/26
Power Sensor	Anritsu	MA2411B	1207295	2026/01/27	2027/01/26
Attenuator	KEYSIGHT	8491B	MY39250703	2026/01/29	2027/01/28

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	101423	2025/07/10	2026/07/09
LISN	Schwarzbeck	NSLK 8127	1197	2025/09/22	2026/09/21
Two-Line V-Network	R&S	ENV216	102185	2025/08/28	2026/08/27
Cable-3m (9k-3G)	EMEC	RG-223	18271M	2025/06/25	2026/06/24
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	2.91 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz, according to the methods defined in ANSI C63.10-2020+Cor.1-2023 and ANSI C63.10a-2024. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

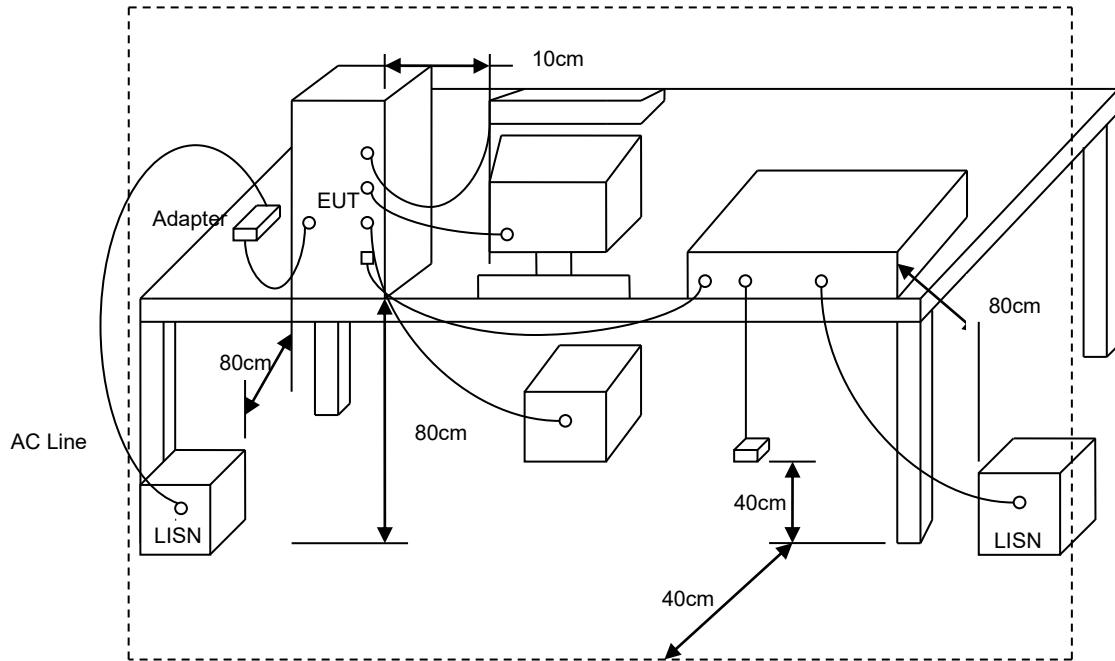



5.4 Test Result and Data

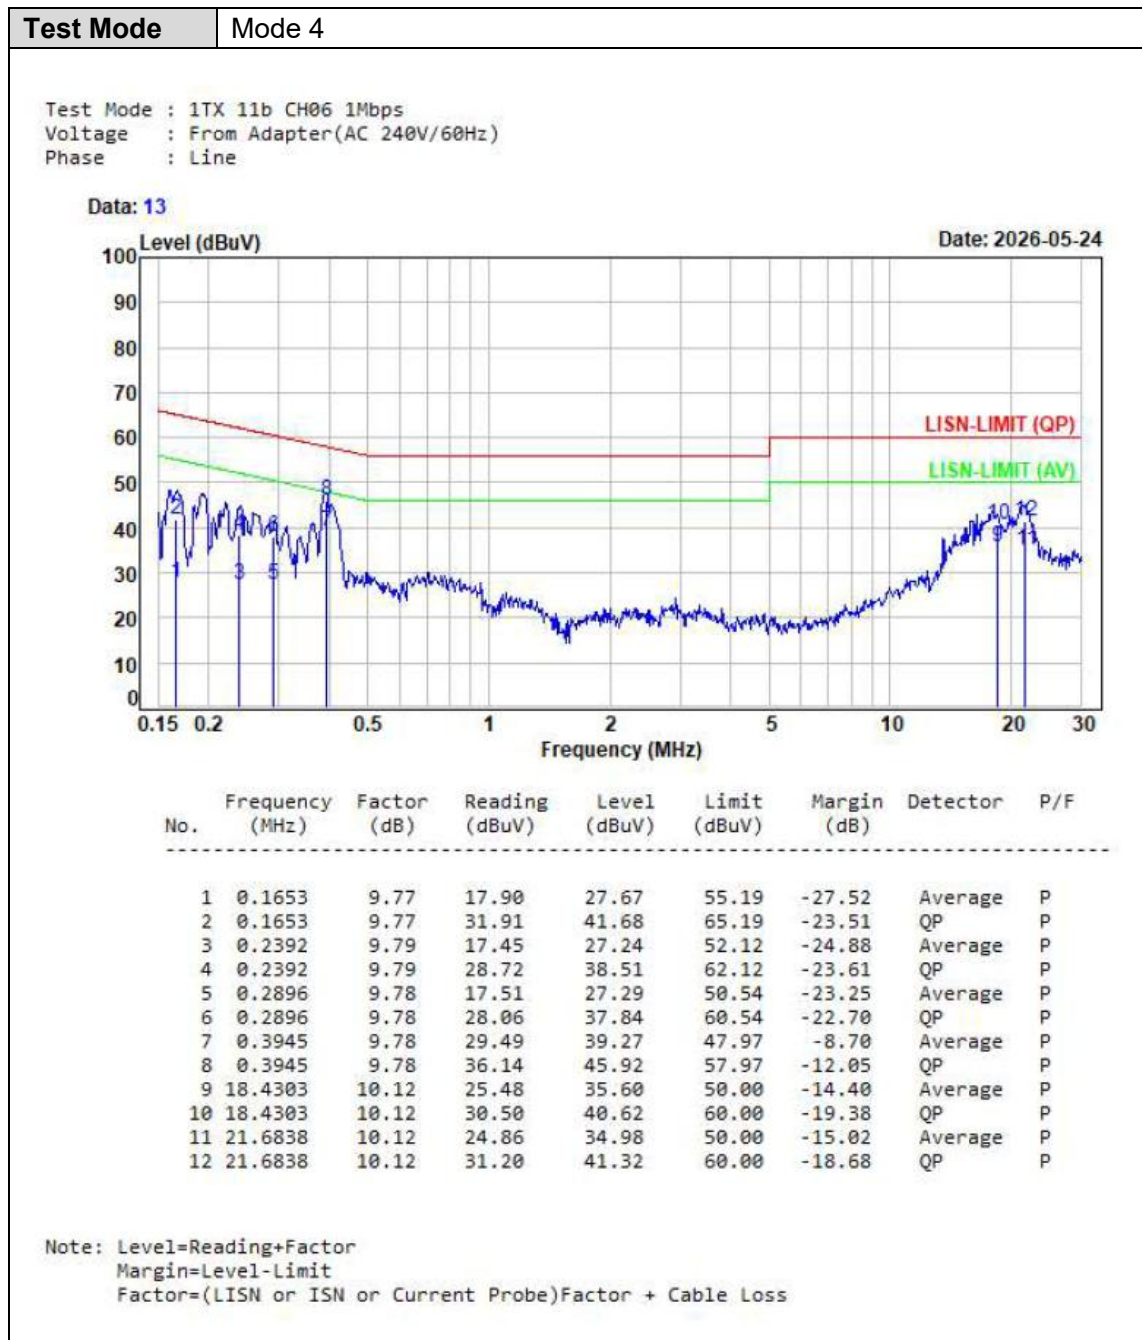


**Test Mode** Mode 4

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 240V/60Hz)
Phase : Neutral

Data: 14

Date: 2026-05-24

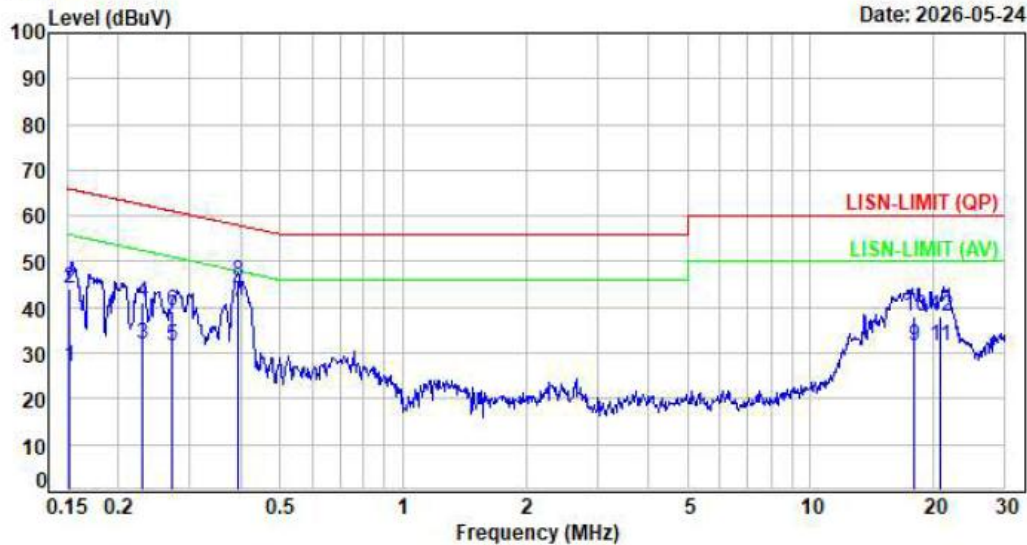

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1512	9.78	17.40	27.18	55.94	-28.76	Average	P
2	0.1512	9.78	34.27	44.05	65.94	-21.89	QP	P
3	0.2300	9.80	21.98	31.78	52.45	-20.67	Average	P
4	0.2300	9.80	31.42	41.22	62.45	-21.23	QP	P
5	0.2721	9.80	21.57	31.37	51.05	-19.68	Average	P
6	0.2721	9.80	29.33	39.13	61.05	-21.92	QP	P
7	0.3940	9.79	31.38	41.17	47.98	-6.81	Average	P
8	0.3940	9.79	35.67	45.46	57.98	-12.52	QP	P
9	18.0326	10.15	21.52	31.67	50.00	-18.33	Average	P
10	18.0326	10.15	28.01	38.16	60.00	-21.84	QP	P
11	20.7999	10.18	21.30	31.48	50.00	-18.52	Average	P
12	20.7999	10.18	27.67	37.85	60.00	-22.15	QP	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup


Below 30MHz test setup

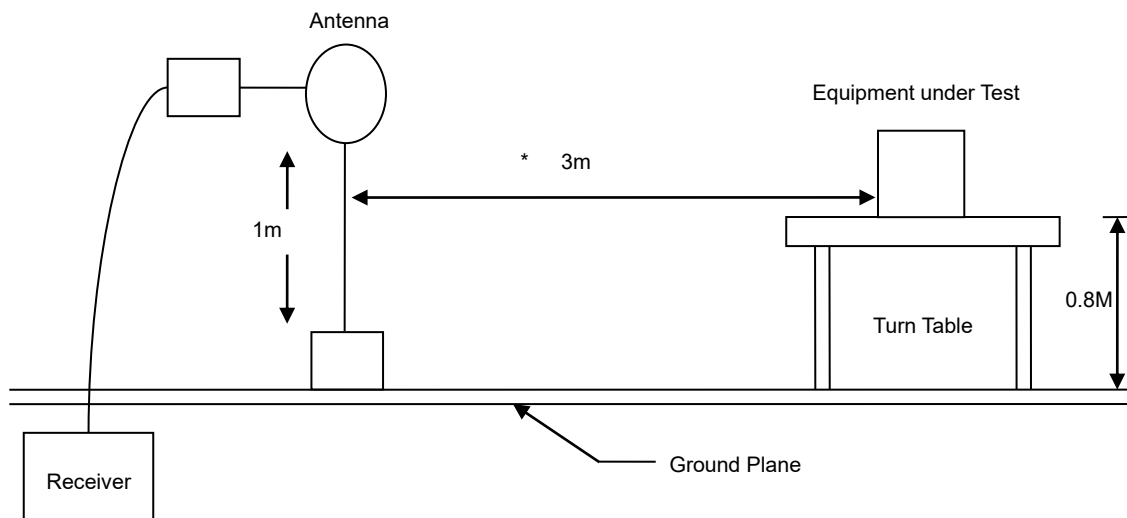

30MHz- 1GHz Test Setup

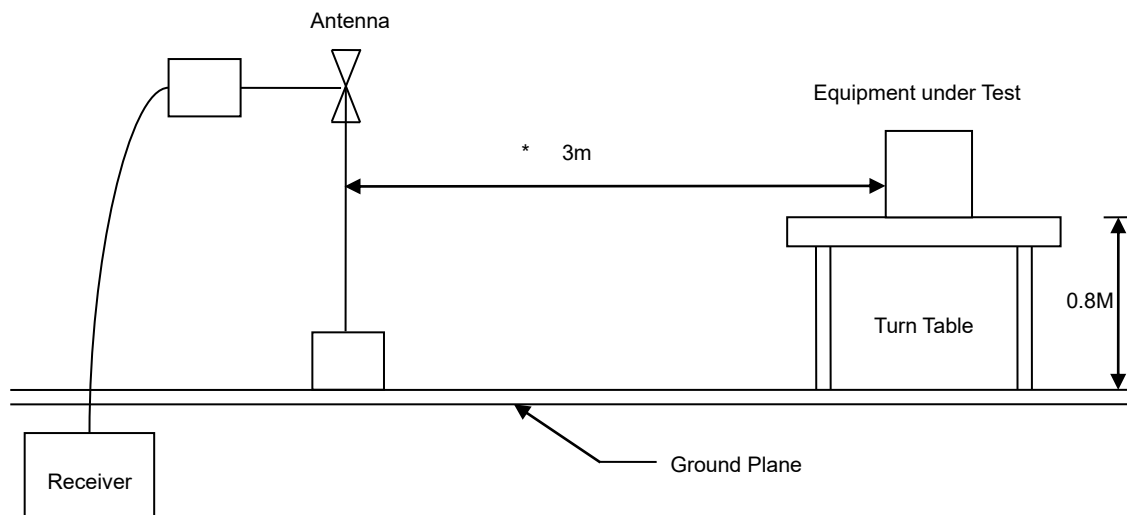

Above 1GHz Test Setup

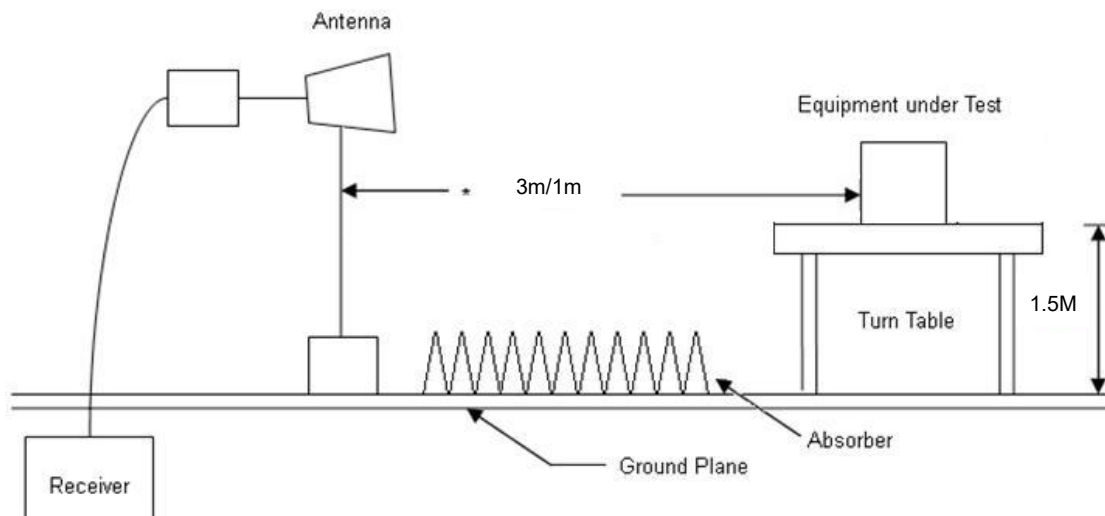





6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

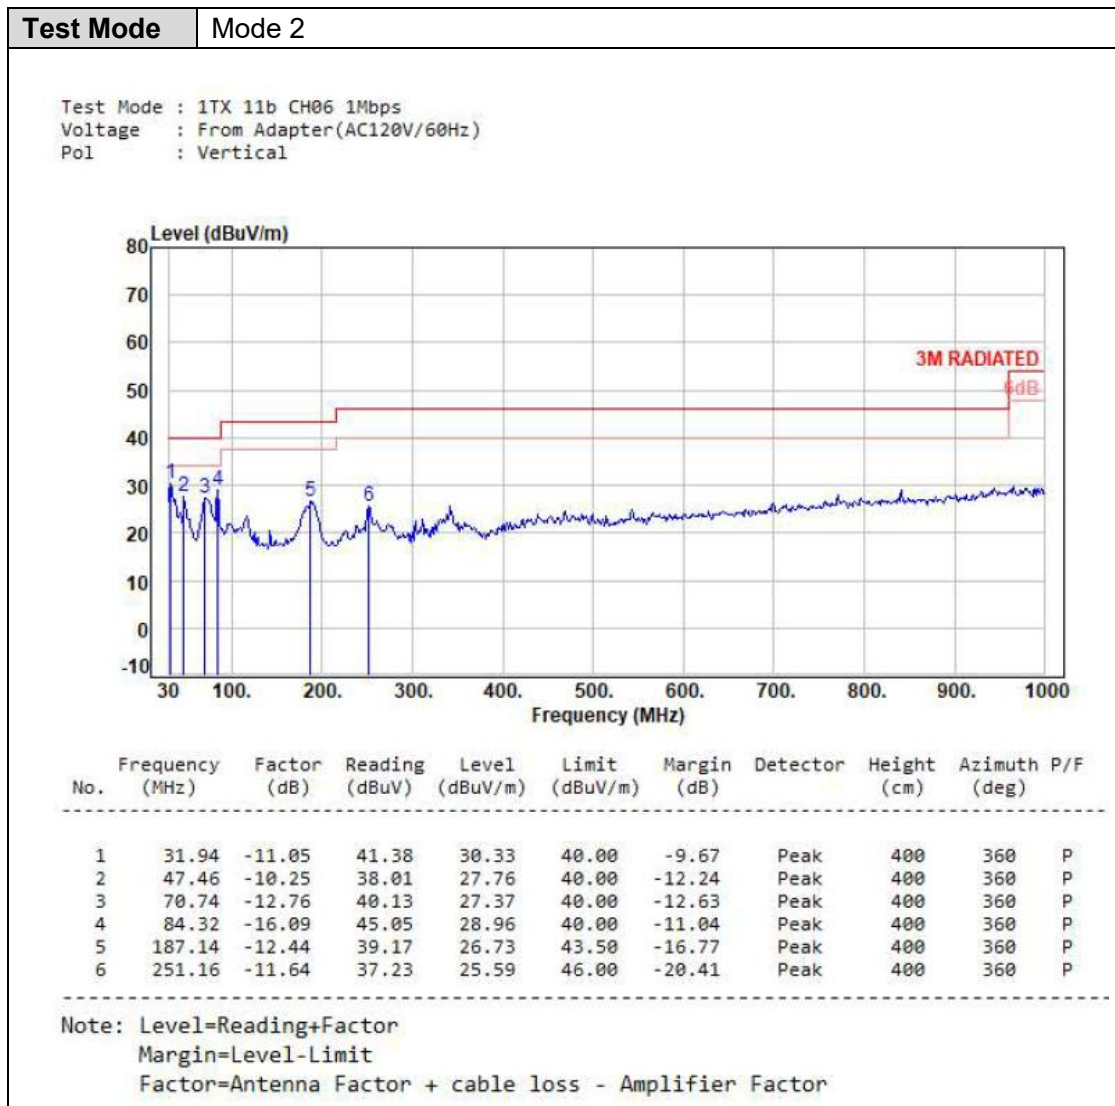

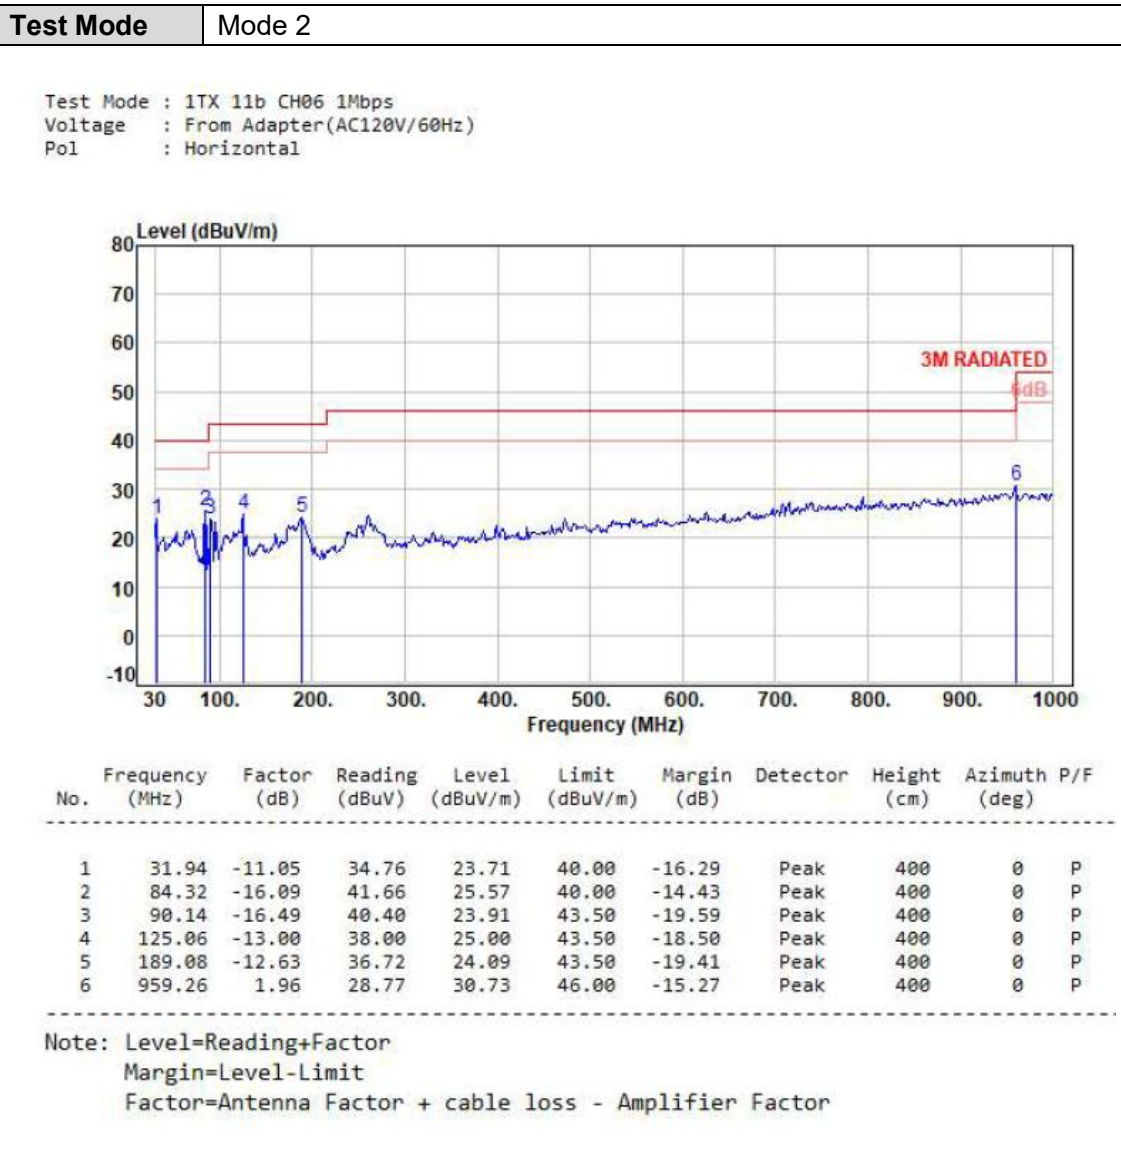




6.6 Test Result and Data (Bandedge)

Test Mode : 1TX 11b CH01 1Mbps

Pol : Vertical

Detector : Peak

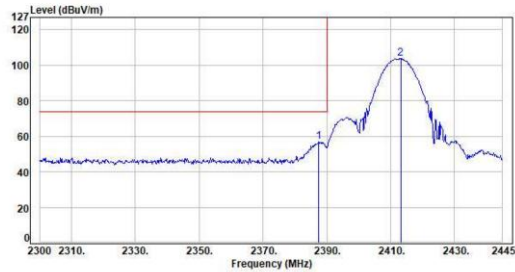


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.44	-6.61	63.57	56.96	74.00	-17.04	Peak	238	276	P
2	2413.10	-6.70	110.66	103.96	200.00	-96.04	Peak	238	276	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH01 1Mbps

Pol : Vertical

Detector : Average

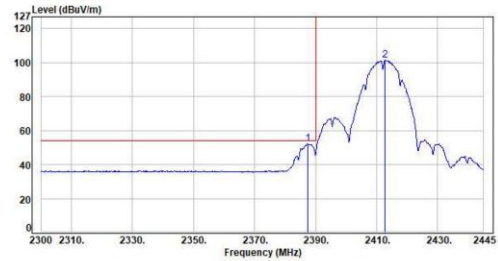


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.44	-6.61	58.54	51.93	54.00	-2.07	Average	238	276	P
2	2412.81	-6.70	108.17	101.47	200.00	-98.53	Average	238	276	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH01 1Mbps

Pol : Horizontal

Detector : Peak

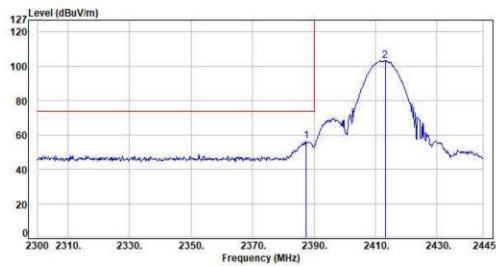


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.44	-6.61	63.20	56.59	74.00	-17.41	Peak	145	299	P
2	2413.10	-6.70	110.26	103.56	200.00	-96.44	Peak	145	299	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH01 1Mbps

Pol : Horizontal

Detector : Average

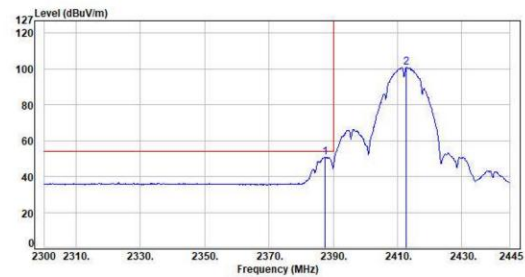

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.44	-6.61	57.39	50.78	54.00	-3.22	Average	145	299	P
2	2412.81	-6.70	107.75	101.05	200.00	-98.95	Average	145	299	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH06 1Mbps

Pol : Vertical

Detector : Peak

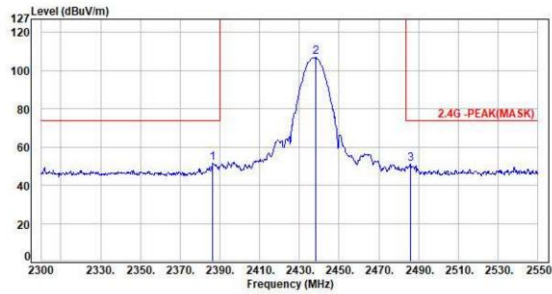


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2386.50	-6.61	58.18	51.57	74.00	-22.43	Peak	236	273	P
2	2438.00	-6.78	113.86	107.08	200.00	-92.92	Peak	236	273	P
3	2485.75	-6.65	57.61	50.96	74.00	-23.04	Peak	236	273	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH06 1Mbps

Pol : Vertical

Detector : Average

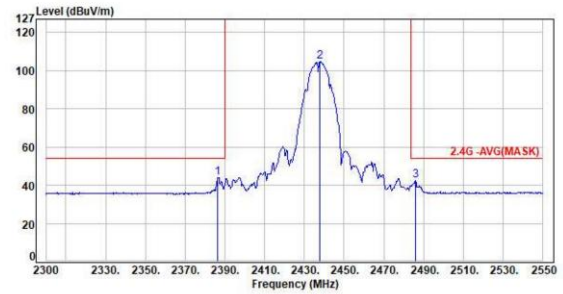


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2386.50	-6.61	50.71	44.10	54.00	-9.90	Average	236	273	P
2	2437.75	-6.78	111.54	104.76	200.00	-95.24	Average	236	273	P
3	2485.75	-6.65	48.94	42.29	54.00	-11.71	Average	236	273	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH06 1Mbps

Pol : Horizontal

Detector : Peak

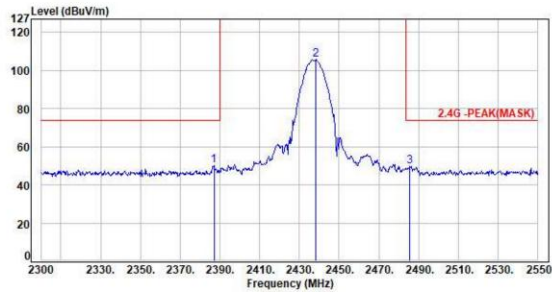


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.00	-6.61	56.69	50.08	74.00	-23.92	Peak	106	168	P
2	2438.00	-6.78	112.48	105.70	200.00	-94.30	Peak	106	168	P
3	2485.50	-6.65	56.45	49.80	74.00	-24.20	Peak	106	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH06 1Mbps

Pol : Horizontal

Detector : Average

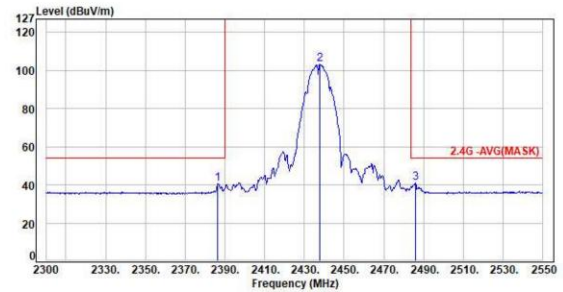

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2386.50	-6.61	47.34	40.73	54.00	-13.27	Average	106	168	P
2	2437.75	-6.78	109.98	103.20	200.00	-96.80	Average	106	168	P
3	2485.75	-6.65	47.83	41.18	54.00	-12.82	Average	106	168	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH11 1Mbps

Pol : Vertical

Detector : Peak

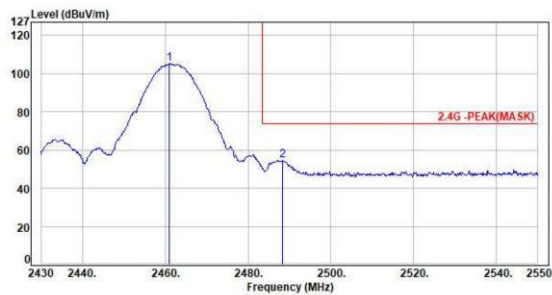


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	112.00	105.24	200.00	-94.76	Peak	279	270	P
2	2488.32	-6.66	61.38	54.72	74.00	-19.28	Peak	279	270	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH11 1Mbps

Pol : Vertical

Detector : Average

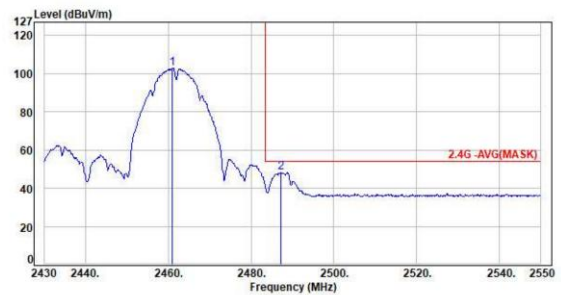


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	109.45	102.69	200.00	-97.31	Average	279	270	P
2	2487.24	-6.65	54.89	48.24	54.00	-5.76	Average	279	270	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH11 1Mbps

Pol : Horizontal

Detector : Peak

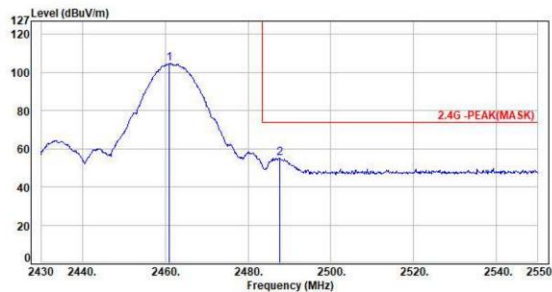


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	111.41	104.65	200.00	-95.35	Peak	179	171	P
2	2487.68	-6.66	61.82	55.16	74.00	-18.84	Peak	179	171	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH11 1Mbps

Pol : Horizontal

Detector : Average

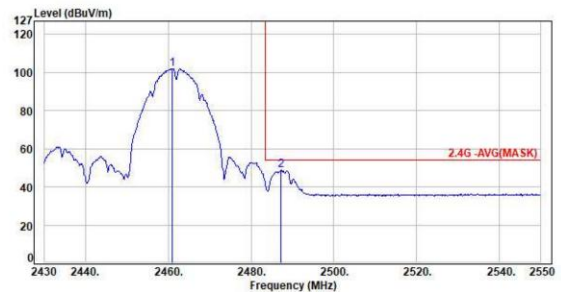

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	108.77	102.01	200.00	-97.99	Average	179	171	P
2	2487.24	-6.65	55.43	48.78	54.00	-5.22	Average	179	171	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH01 6Mbps

Pol : Vertical

Detector : Peak

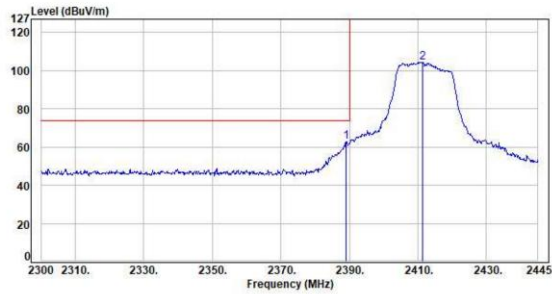

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.03	-6.64	69.44	62.80	74.00	-11.20	Peak	268	278	P
2	2411.36	-6.71	111.18	104.47	200.00	-95.53	Peak	268	278	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH01 6Mbps

Pol : Vertical

Detector : Average

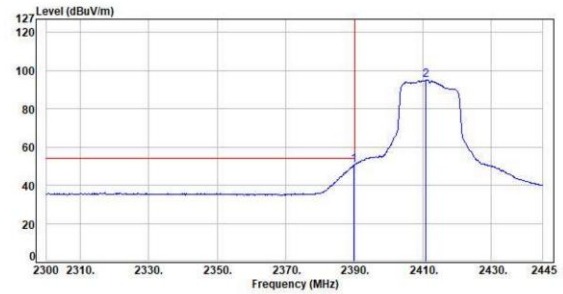

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.90	-6.65	57.40	50.75	54.00	-3.25	Average	268	278	P
2	2410.93	-6.71	101.84	95.13	200.00	-104.87	Average	268	278	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH01 6Mbps

Pol : Horizontal

Detector : Peak

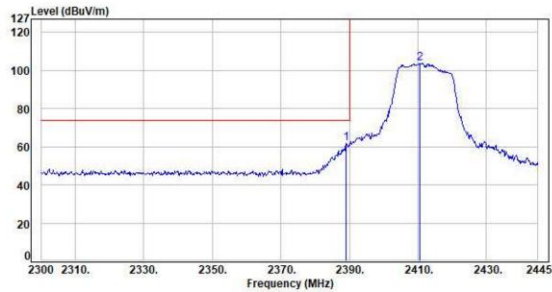

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.03	-6.64	68.41	61.77	74.00	-12.23	Peak	143	301	P
2	2410.49	-6.72	110.45	103.73	200.00	-96.27	Peak	143	301	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH01 6Mbps

Pol : Horizontal

Detector : Average

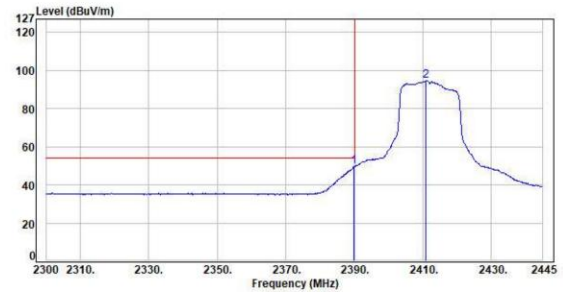

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.90	-6.65	56.19	49.54	54.00	-4.46	Average	143	301	P
2	2410.93	-6.71	101.25	94.54	200.00	-105.46	Average	143	301	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH06 6Mbps

Pol : Vertical

Detector : Peak

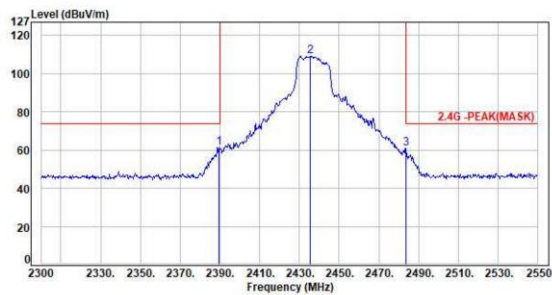


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.50	-6.65	68.11	61.46	74.00	-12.54	Peak	232	272	P
2	2435.50	-6.75	116.11	109.36	200.00	-90.64	Peak	232	272	P
3	2483.75	-6.65	67.63	60.98	74.00	-13.02	Peak	232	272	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH06 6Mbps

Pol : Vertical

Detector : Average

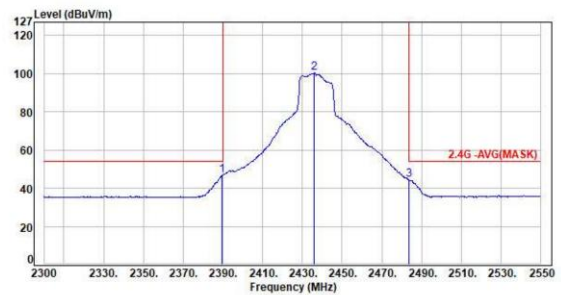


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.75	-6.65	53.56	46.91	54.00	-7.09	Average	232	272	P
2	2435.75	-6.76	107.13	100.37	200.00	-99.63	Average	232	272	P
3	2483.75	-6.65	50.95	44.30	54.00	-9.70	Average	232	272	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH06 6Mbps

Pol : Horizontal

Detector : Peak

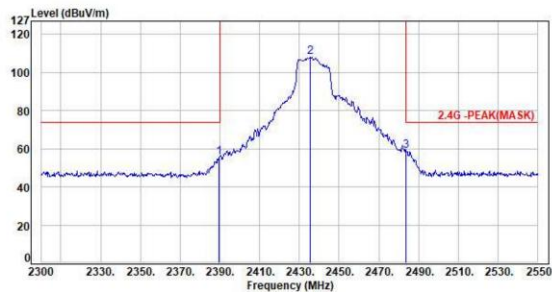


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.50	-6.65	62.05	55.40	74.00	-18.60	Peak	100	170	P
2	2435.50	-6.75	115.02	108.27	200.00	-91.73	Peak	100	170	P
3	2483.75	-6.65	65.66	59.01	74.00	-14.99	Peak	100	170	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH06 6Mbps

Pol : Horizontal

Detector : Average

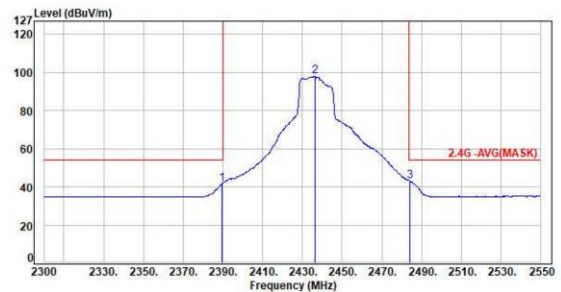

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.50	-6.65	48.11	41.46	54.00	-12.54	Average	100	170	P
2	2435.25	-6.76	104.95	98.19	200.00	-101.81	Average	100	170	P
3	2484.00	-6.65	49.70	43.05	54.00	-10.95	Average	100	170	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH11 6Mbps

Pol : Vertical

Detector : Peak

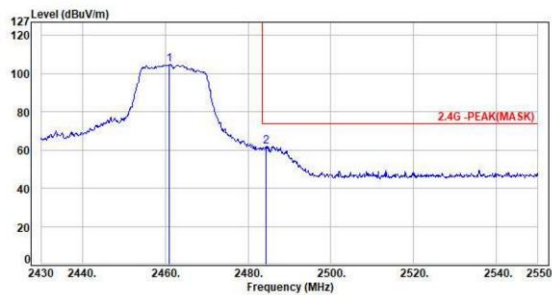


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	111.64	104.88	200.00	-95.12	Peak	211	273	P
2	2484.24	-6.65	68.70	62.05	74.00	-11.95	Peak	211	273	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH11 6Mbps

Pol : Vertical

Detector : Average

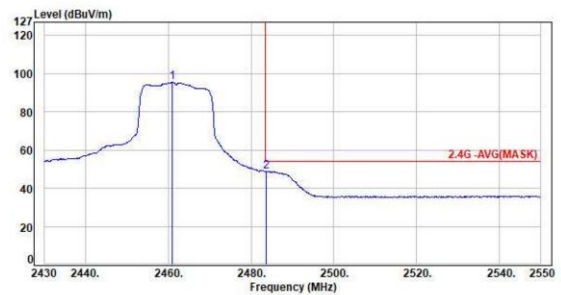


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	102.18	95.42	200.00	-104.58	Average	211	273	P
2	2483.64	-6.65	55.54	48.89	54.00	-5.11	Average	211	273	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH11 6Mbps

Pol : Horizontal

Detector : Peak

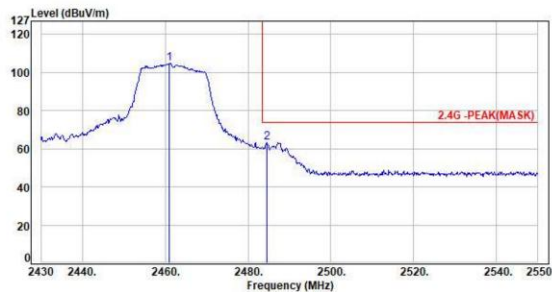


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	111.34	104.58	200.00	-95.42	Peak	185	171	P
2	2484.48	-6.65	69.84	63.19	74.00	-10.81	Peak	185	171	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH11 6Mbps

Pol : Horizontal

Detector : Average

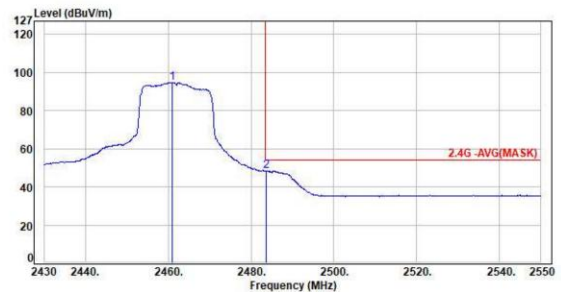

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	101.63	94.87	200.00	-105.13	Average	185	171	P
2	2483.64	-6.65	55.04	48.39	54.00	-5.61	Average	185	171	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax20 CH01 NSS1 MCS0

Pol : Vertical

Detector : Peak

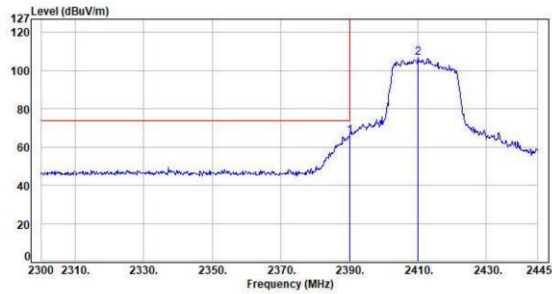


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.05	-6.65	72.40	65.75	74.00	-8.25	Peak	239	271	P
2	2410.06	-6.72	113.62	106.90	200.00	-93.10	Peak	239	271	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0

Pol : Vertical

Detector : Average

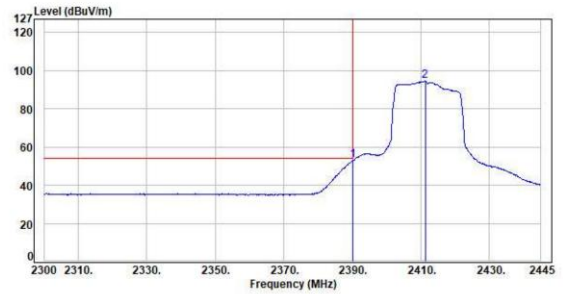


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.05	-6.65	59.54	52.89	54.00	-1.11	Average	239	271	P
2	2411.22	-6.71	101.19	94.48	200.00	-105.52	Average	239	271	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0

Pol : Horizontal

Detector : Peak

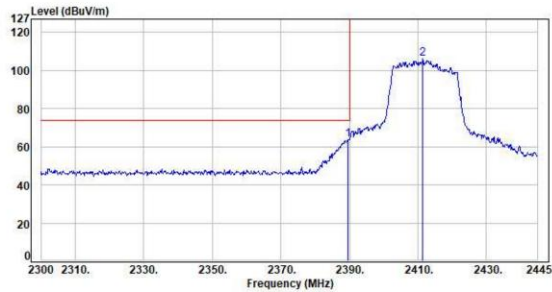


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.47	-6.64	70.52	63.88	74.00	-10.12	Peak	145	299	P
2	2411.36	-6.71	112.71	106.00	200.00	-94.00	Peak	145	299	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0

Pol : Horizontal

Detector : Average

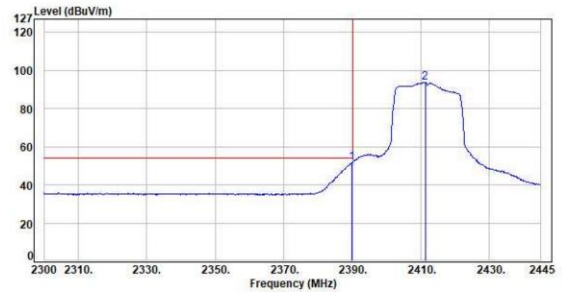


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.76	-6.65	58.09	51.44	54.00	-2.56	Average	145	299	P
2	2411.22	-6.71	100.45	93.74	200.00	-106.26	Average	145	299	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Vertical Detector : Peak

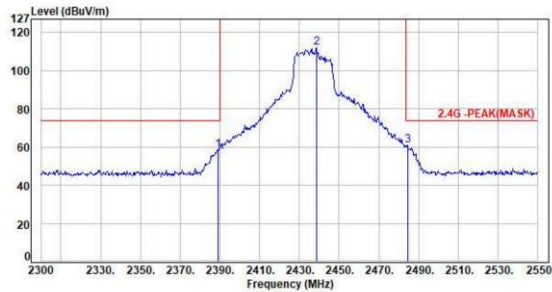

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.25	-6.64	65.17	58.53	74.00	-15.47	Peak	228	274	P
2	2438.50	-6.78	118.99	112.21	200.00	-87.79	Peak	228	274	P
3	2484.50	-6.65	67.44	60.79	74.00	-13.21	Peak	228	274	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Vertical Detector : Average

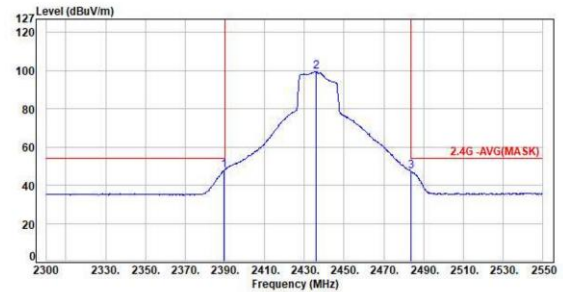

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.75	-6.65	54.69	48.04	54.00	-5.96	Average	228	274	P
2	2435.75	-6.76	106.35	99.59	200.00	-100.41	Average	228	274	P
3	2483.75	-6.65	53.78	47.13	54.00	-6.87	Average	228	274	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Horizontal Detector : Peak

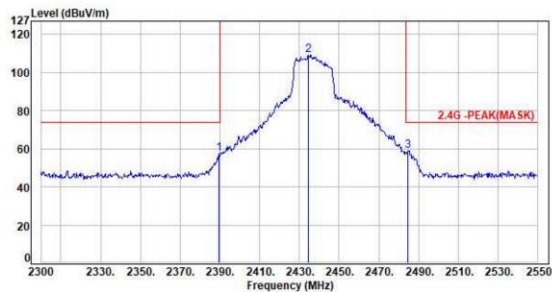

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.50	-6.65	63.89	57.24	74.00	-16.76	Peak	103	168	P
2	2434.50	-6.75	115.91	109.16	200.00	-90.84	Peak	103	168	P
3	2484.75	-6.65	65.65	59.00	74.00	-15.00	Peak	103	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Horizontal Detector : Average

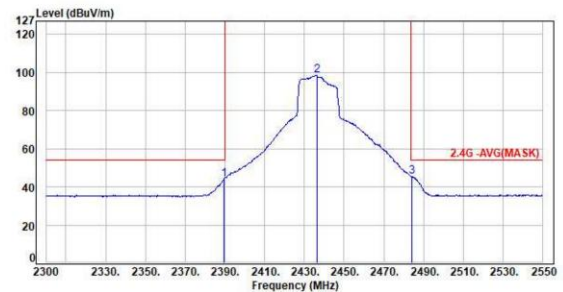


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.50	-6.65	50.46	43.81	54.00	-10.19	Average	103	168	P
2	2436.25	-6.76	105.17	98.41	200.00	-101.59	Average	103	168	P
3	2484.00	-6.65	52.11	45.46	54.00	-8.54	Average	103	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH11 NSS1 MCS0
Pol : Vertical Detector : Peak

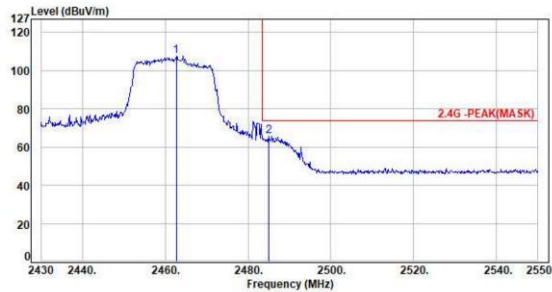

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.64	-6.75	114.61	107.86	200.00	-92.14	Peak	250	271	P
2	2484.96	-6.65	72.33	65.68	74.00	-8.32	Peak	250	271	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH11 NSS1 MCS0
Pol : Vertical Detector : Average

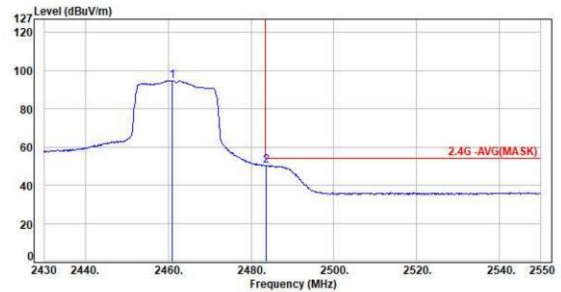

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2460.96	-6.76	101.64	94.88	200.00	-105.12	Average	250	271	P
2	2483.76	-6.65	57.02	50.37	54.00	-3.63	Average	250	271	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH11 NSS1 MCS0
Pol : Horizontal Detector : Peak

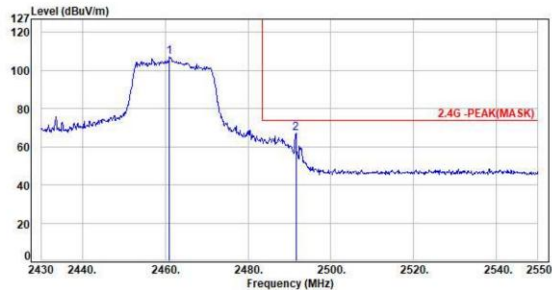

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	113.90	107.14	200.00	-92.86	Peak	124	171	P
2	2491.56	-6.65	73.91	67.26	74.00	-6.74	Peak	124	171	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH11 NSS1 MCS0
Pol : Horizontal Detector : Average

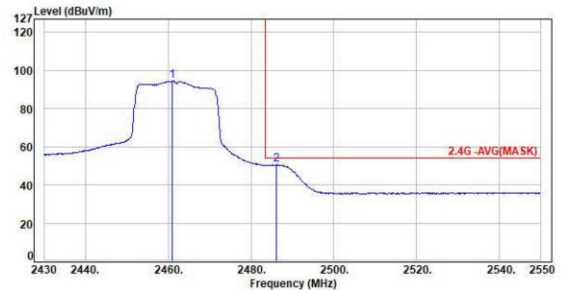


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-6.76	101.28	94.52	200.00	-105.48	Average	124	171	P
2	2486.16	-6.65	57.41	50.76	54.00	-3.24	Average	124	171	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH03 NSS1 MCS0
Pol : Vertical Detector : Peak

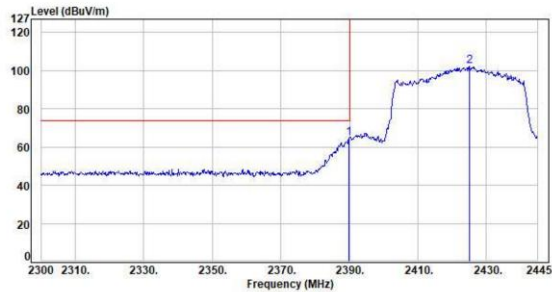

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.76	-6.65	71.46	64.81	74.00	-9.19	Peak	252	271	P
2	2424.99	-6.66	108.86	102.20	200.00	-97.80	Peak	252	271	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH03 NSS1 MCS0
Pol : Vertical Detector : Average

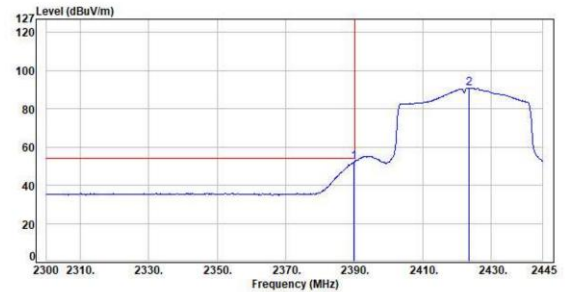

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.90	-6.65	58.90	52.25	54.00	-1.75	Average	252	271	P
2	2423.40	-6.64	97.57	90.93	200.00	-109.07	Average	252	271	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH03 NSS1 MCS0
Pol : Horizontal Detector : Peak

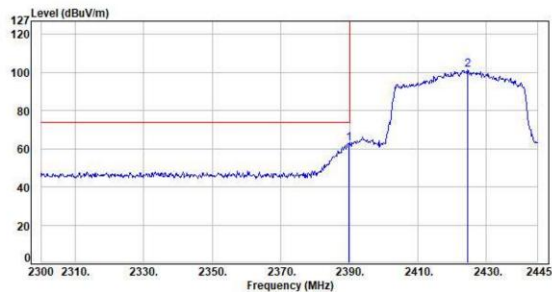

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.76	-6.65	69.32	62.67	74.00	-11.33	Peak	142	296	P
2	2424.41	-6.65	107.05	100.40	200.00	-99.60	Peak	142	296	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH03 NSS1 MCS0
Pol : Horizontal Detector : Average

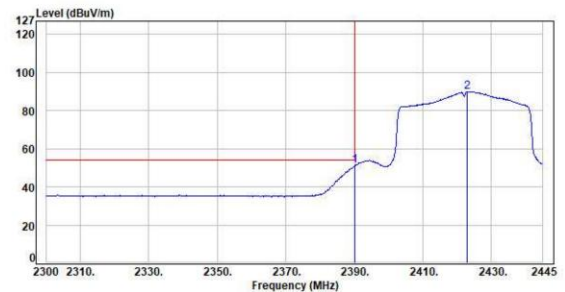


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.05	-6.65	57.62	50.97	54.00	-3.03	Average	142	296	P
2	2422.96	-6.64	96.67	90.03	200.00	-109.97	Average	142	296	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH06 NSS1 MCS0
Pol : Vertical Detector : Peak

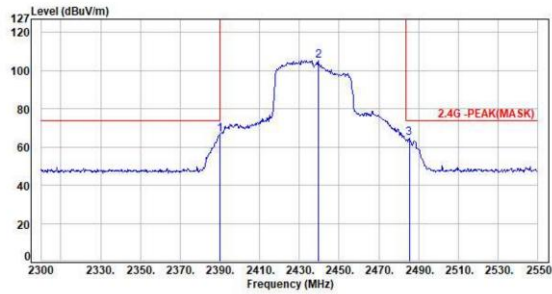

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-6.65	73.46	66.81	74.00	-7.19	Peak	236	277	P
2	2439.50	-6.80	111.99	105.19	200.00	-94.81	Peak	236	277	P
3	2485.25	-6.65	71.45	64.80	74.00	-9.20	Peak	236	277	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH06 NSS1 MCS0
Pol : Vertical Detector : Average

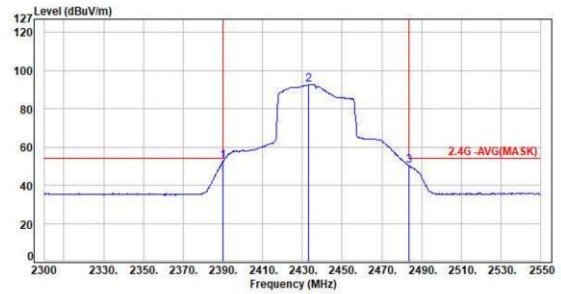

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-6.65	59.13	52.48	54.00	-1.52	Average	236	277	P
2	2433.25	-6.73	99.59	92.86	200.00	-107.14	Average	236	277	P
3	2483.75	-6.65	56.96	50.31	54.00	-3.69	Average	236	277	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH06 NSS1 MCS0
Pol : Horizontal Detector : Peak

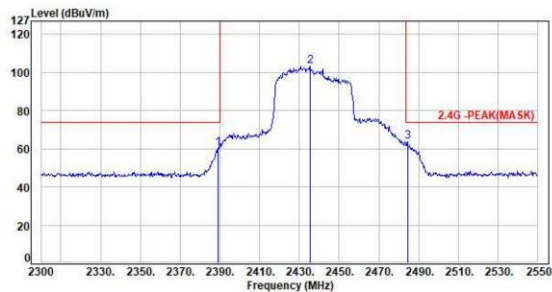

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.25	-6.64	66.89	60.25	74.00	-13.75	Peak	100	168	P
2	2435.25	-6.75	110.87	103.32	200.00	-96.68	Peak	100	168	P
3	2484.50	-6.65	70.53	63.88	74.00	-10.12	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH06 NSS1 MCS0
Pol : Horizontal Detector : Average

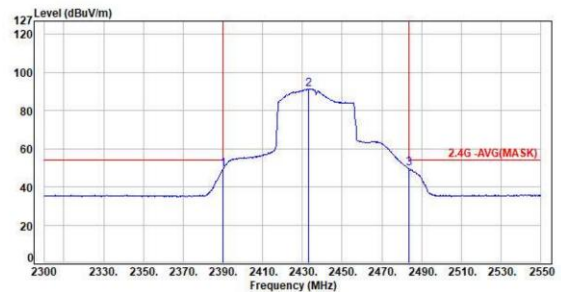


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-6.65	55.80	49.15	54.00	-4.85	Average	100	168	P
2	2433.00	-6.73	98.07	91.34	200.00	-108.66	Average	100	168	P
3	2483.75	-6.65	56.41	49.76	54.00	-4.24	Average	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH09 NSS1 MCS0
Pol : Vertical Detector : Peak

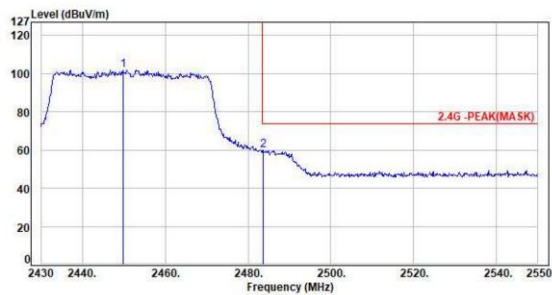

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2449.80	-6.79	108.91	102.12	200.00	-97.88	Peak	222	269	P
2	2483.76	-6.65	66.61	59.96	74.00	-14.04	Peak			

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH09 NSS1 MCS0
Pol : Vertical Detector : Average

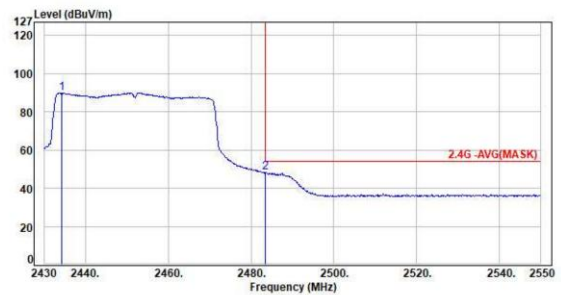

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2434.32	-6.74	96.80	90.06	200.00	-109.94	Average	222	269	P
2	2483.52	-6.65	54.84	48.19	54.00	-5.81	Average			

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH09 NSS1 MCS0
Pol : Horizontal Detector : Peak

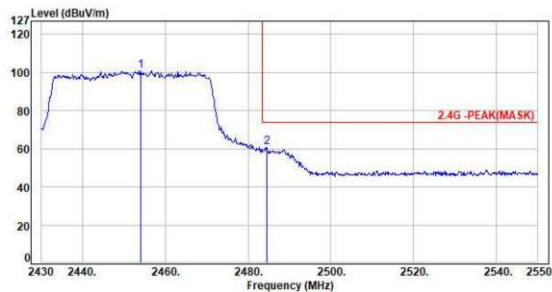

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2454.00	-6.78	107.73	100.95	200.00	-99.05	Peak	153	195	P
2	2484.48	-6.65	67.48	60.83	74.00	-13.17	Peak			

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH09 NSS1 MCS0
Pol : Horizontal Detector : Average

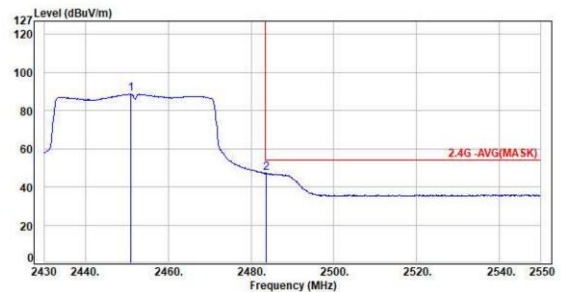

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2451.00	-6.79	95.46	88.67	200.00	-111.33	Average	153	195	P
2	2483.64	-6.65	53.77	47.12	54.00	-6.88	Average			

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




6.7 Test Result and Data (1GHz ~ 3GHz)

Test Mode : 1TX 11b CH01 1Mbps

Pol : Vertical

Detector : Peak

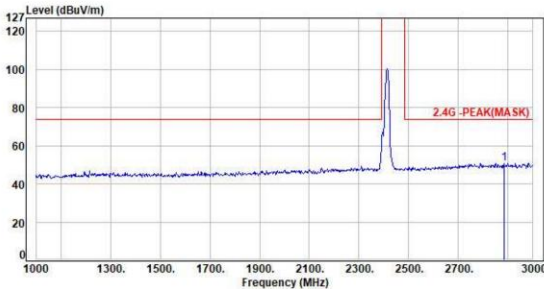


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2464.00	-5.16	56.08	50.92	74.00	-23.08	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH01 1Mbps

Pol : Horizontal

Detector : Peak

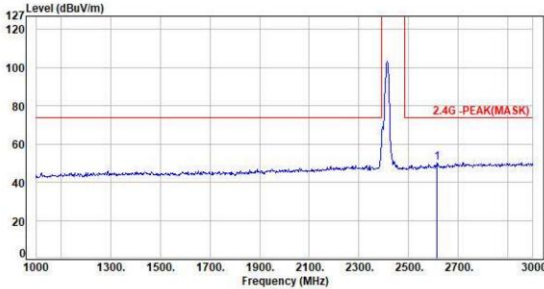

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2614.00	-6.25	56.63	50.38	74.00	-23.62	Peak	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH06 1Mbps

Pol : Vertical

Detector : Peak

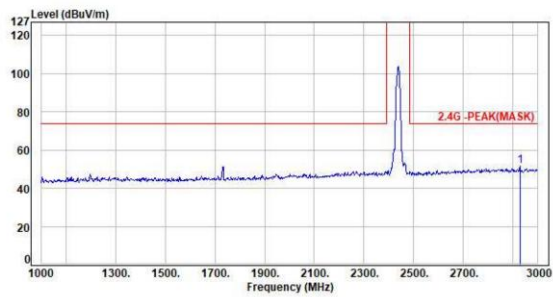


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2928.00	-5.03	56.48	51.45	74.00	-22.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH06 1Mbps

Pol : Horizontal

Detector : Peak

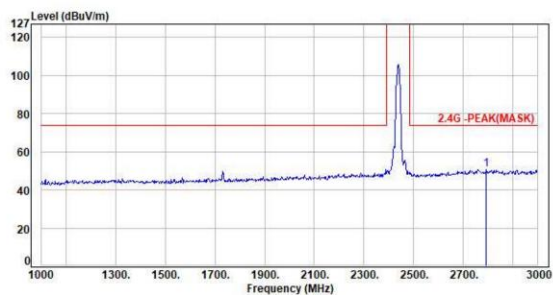

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2792.00	-5.31	56.03	50.72	74.00	-23.28	Peak	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH11 1Mbps

Pol : Vertical

Detector : Peak

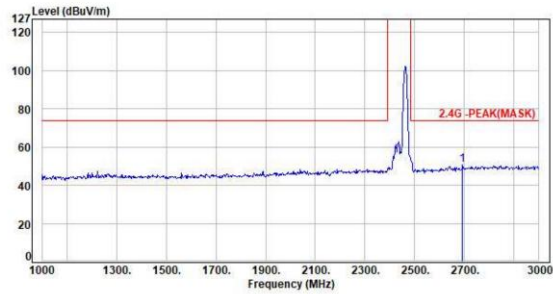


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2692.00	-5.80	56.60	50.80	74.00	-23.20	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH11 1Mbps

Pol : Horizontal

Detector : Peak

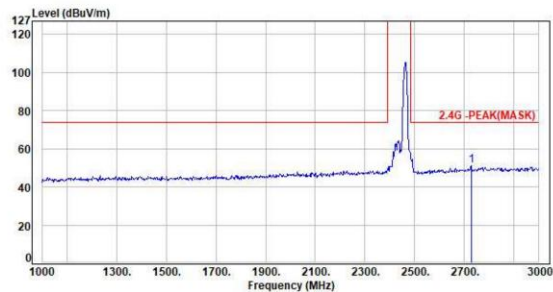


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2728.00	-5.52	56.75	51.23	74.00	-22.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11g CH01 6Mbps
Pol : Vertical Detector : Peak

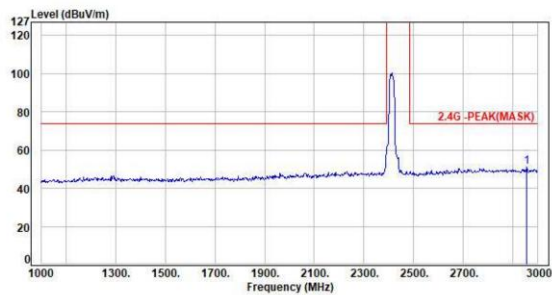

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2456.00	-4.98	56.29	51.39	74.00	-22.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH01 6Mbps
Pol : Horizontal Detector : Peak

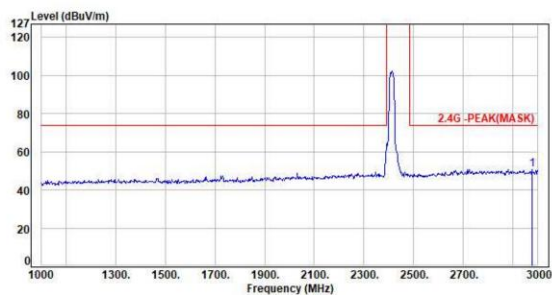

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2476.00	-4.83	55.46	50.63	74.00	-23.37	Peak	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH06 6Mbps

Pol : Vertical

Detector : Peak

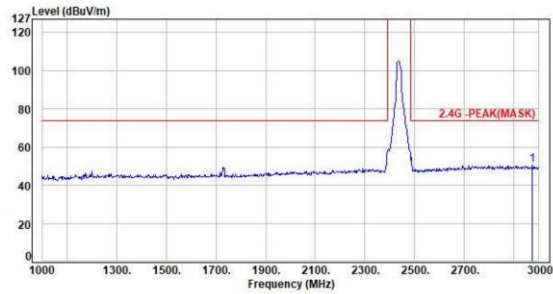


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2474.00	-4.84	55.33	50.49	74.00	-23.51	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH06 6Mbps

Pol : Horizontal

Detector : Peak

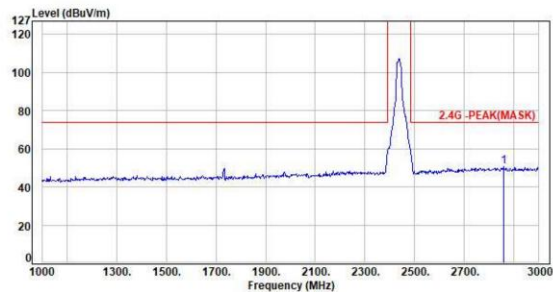


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2858.00	-5.17	55.65	50.48	74.00	-23.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11g CH11 6Mbps
Pol : Vertical Detector : Peak

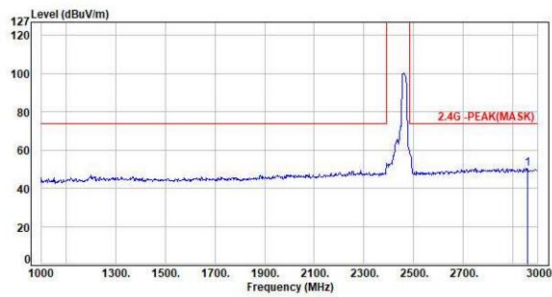

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2490.00	-4.98	55.26	50.36	74.00	-23.64	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH11 6Mbps
Pol : Horizontal Detector : Peak

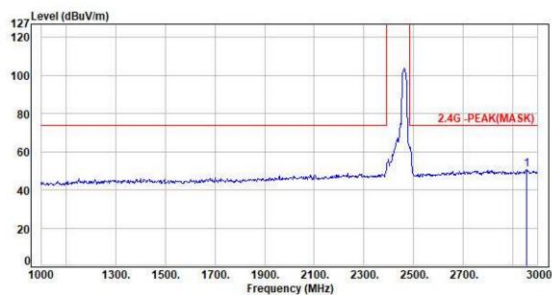


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2494.00	-4.98	55.38	50.48	74.00	-23.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Vertical Detector : Peak

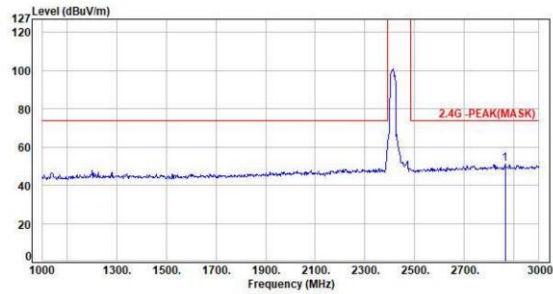

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2864.00	-5.17	56.40	51.23	74.00	-22.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Peak

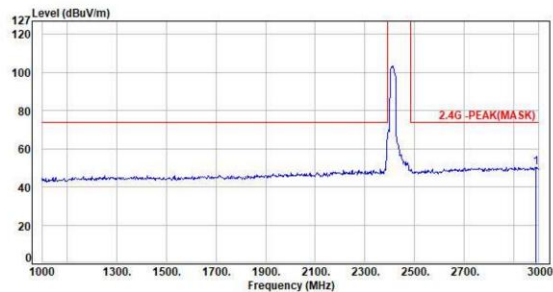


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2988.00	-4.78	54.90	50.12	74.00	-23.88	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Vertical Detector : Peak

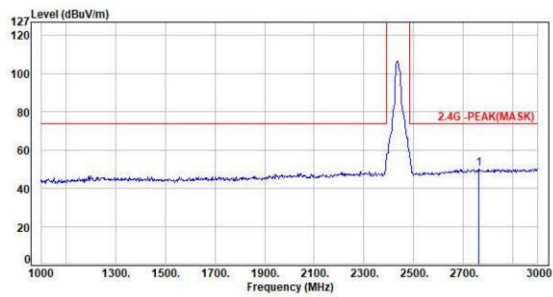

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2762.00	-5.42	55.50	50.08	74.00	-23.92	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Horizontal Detector : Peak

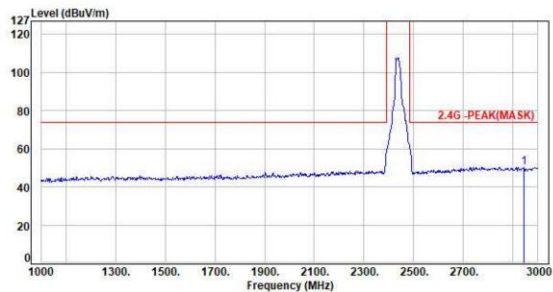


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2944.00	-4.91	55.34	50.43	74.00	-23.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH11 NSS1 MCS0
Pol : Vertical Detector : Peak

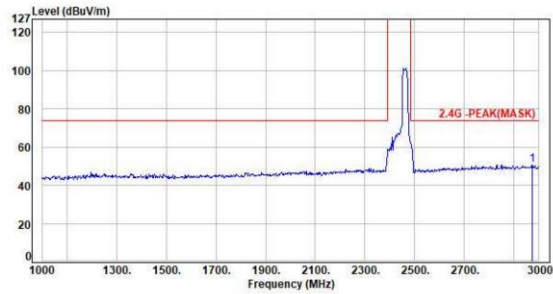

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2972.00	-4.87	55.59	50.72	74.00	-23.28	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH11 NSS1 MCS0
Pol : Horizontal Detector : Peak

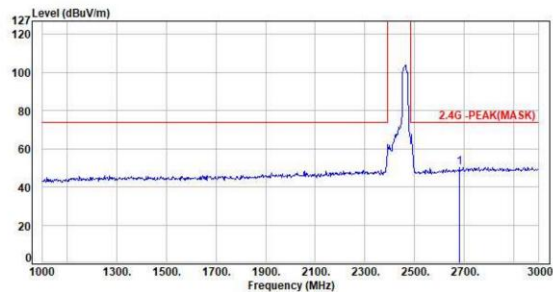


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2682.00	-5.89	56.21	50.32	74.00	-23.68	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH03 NSS1 MCS0
Pol : Vertical Detector : Peak

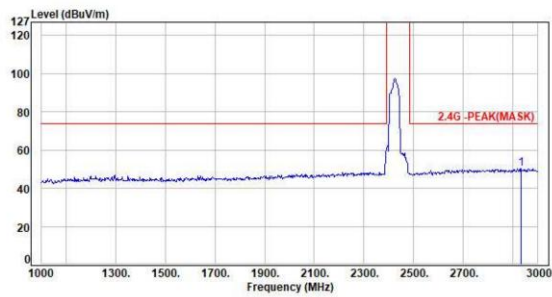

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2934.00	-4.98	55.25	50.27	74.00	-23.73	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH03 NSS1 MCS0
Pol : Horizontal Detector : Peak

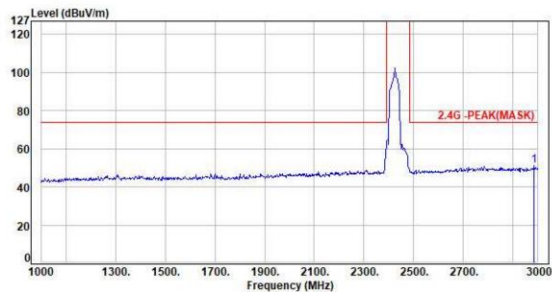


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2986.00	-4.78	55.88	51.10	74.00	-22.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH06 NSS1 MCS0
Pol : Vertical Detector : Peak

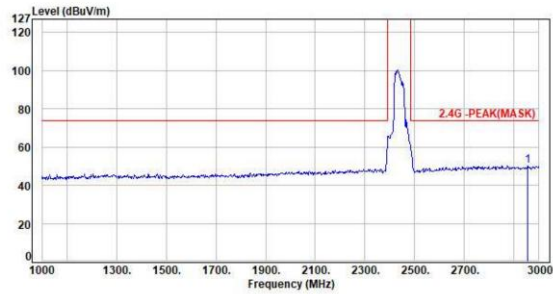

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2456.00	-4.90	55.33	50.43	74.00	-23.57	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH06 NSS1 MCS0
Pol : Horizontal Detector : Peak

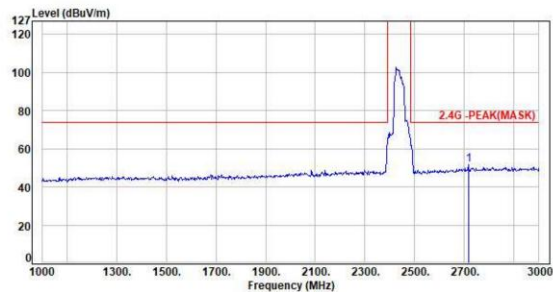


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2716.00	-5.72	57.56	51.84	74.00	-22.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH09 NSS1 MCS0
Pol : Vertical Detector : Peak

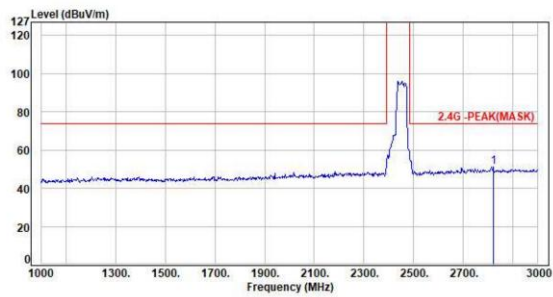

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2400.00	-5.20	56.34	51.14	74.00	-22.86	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH09 NSS1 MCS0
Pol : Horizontal Detector : Peak

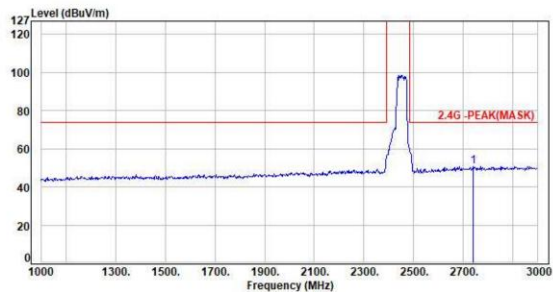

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2400.00	-5.46	56.40	50.94	74.00	-23.06	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




6.8 Test Result and Data (3GHz ~ 18GHz)

Test Mode : 1TX 11b CH01 1Mbps

Pol : Vertical

Detector : Peak

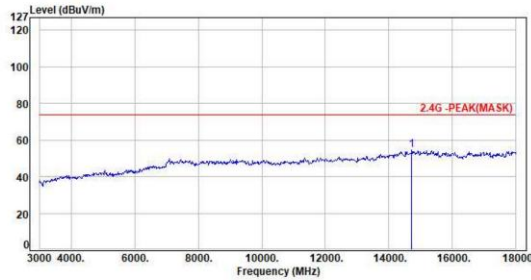


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14715.00	6.31	48.07	54.38	74.00	-19.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH01 1Mbps

Pol : Vertical

Detector : Average

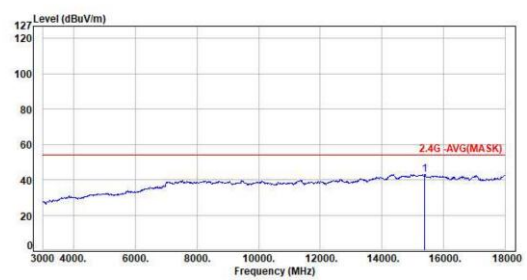


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15390.00	5.90	37.16	43.06	54.00	-10.94	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH01 1Mbps

Pol : Horizontal

Detector : Peak

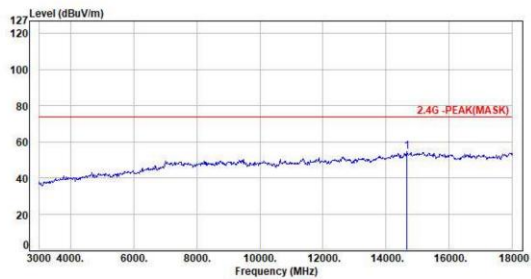


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14670.00	6.33	48.05	54.38	74.00	-19.62	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH01 1Mbps

Pol : Horizontal

Detector : Average

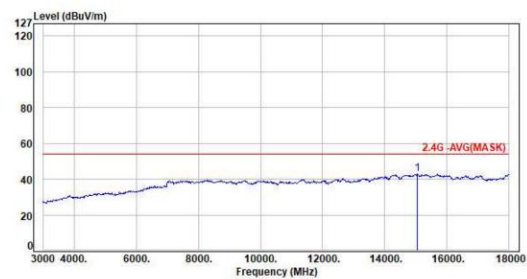


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15045.00	6.20	36.95	43.15	54.00	-10.85	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11b CH06 1Mbps
Pol : Vertical Detector : Peak

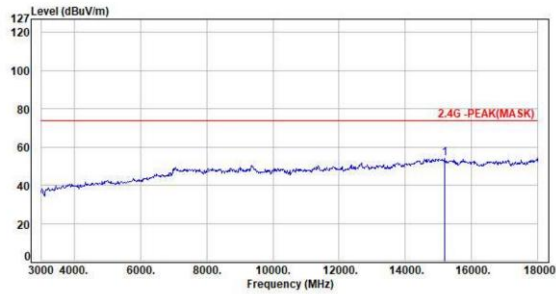

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15195.00	5.98	48.05	54.03	74.00	-19.97	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11b CH06 1Mbps
Pol : Vertical Detector : Average

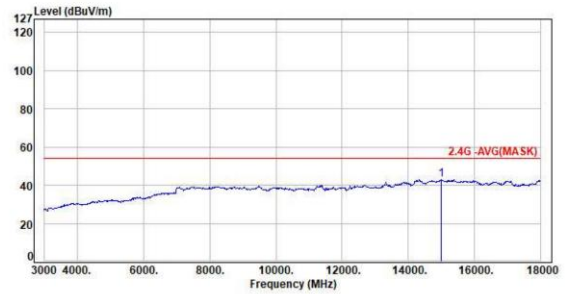

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15000.00	6.30	36.61	42.91	54.00	-11.09	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11b CH06 1Mbps
Pol : Horizontal Detector : Peak

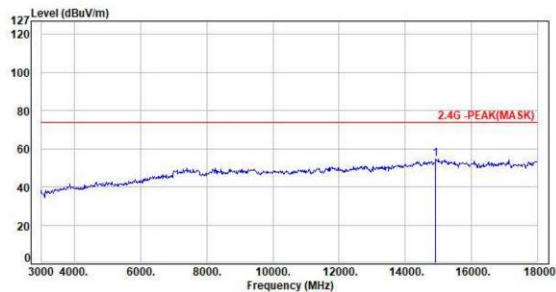

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14910.00	6.18	48.48	54.66	74.00	-19.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH06 1Mbps
Pol : Horizontal Detector : Average

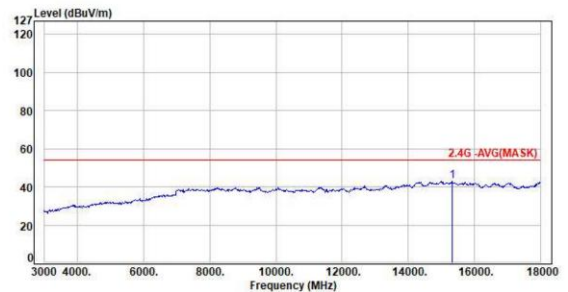

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15330.00	5.75	37.10	42.85	54.00	-11.15	Average	150	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH11 1Mbps

Pol : Vertical

Detector : Peak

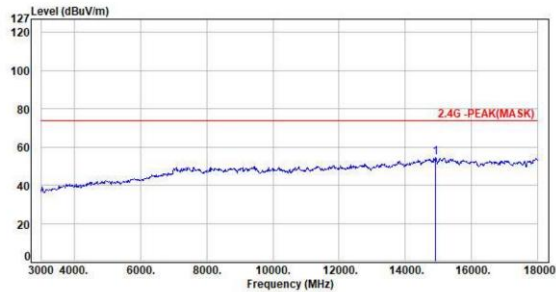


Frequency	Factor	Reading	Level	Limit	Margin	Detector	Height	Azimuth	P/F
No. (MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg)	
1 14910.00	6.18	48.22	54.40	74.00	-19.60	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH11 1Mbps

Pol : Vertical

Detector : Average

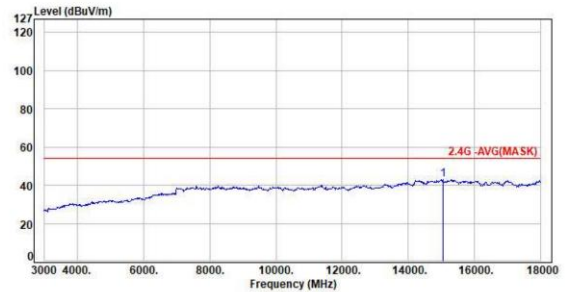


Frequency	Factor	Reading	Level	Limit	Margin	Detector	Height	Azimuth	P/F
No. (MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg)	
1 15045.00	6.20	36.69	42.89	54.00	-11.11	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH11 1Mbps

Pol : Horizontal

Detector : Peak

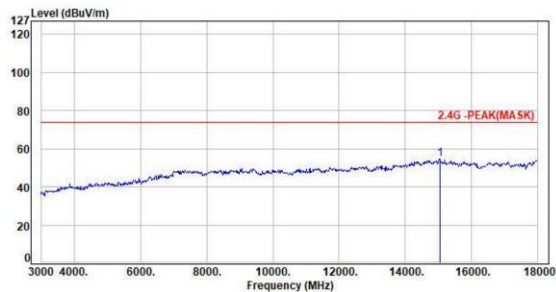


Frequency	Factor	Reading	Level	Limit	Margin	Detector	Height	Azimuth	P/F
No. (MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg)	
1 15045.00	6.20	48.61	54.81	74.00	-19.19	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11b CH11 1Mbps

Pol : Horizontal

Detector : Average

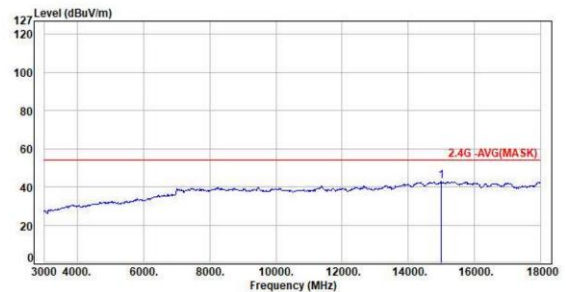

Frequency	Factor	Reading	Level	Limit	Margin	Detector	Height	Azimuth	P/F
No. (MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg)	
1 15000.00	6.30	36.49	42.79	54.00	-11.21	Average	150	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH01 6Mbps

Pol : Vertical

Detector : Peak

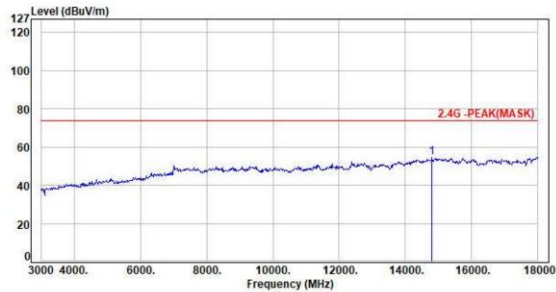


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14885.00	6.16	48.24	54.40	74.00	-19.60	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH01 6Mbps

Pol : Vertical

Detector : Average

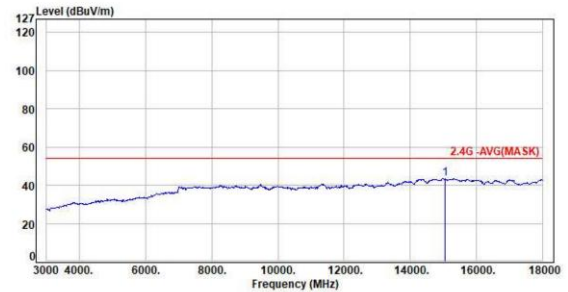


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15860.00	6.19	37.39	43.58	54.00	-10.42	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH01 6Mbps

Pol : Horizontal

Detector : Peak

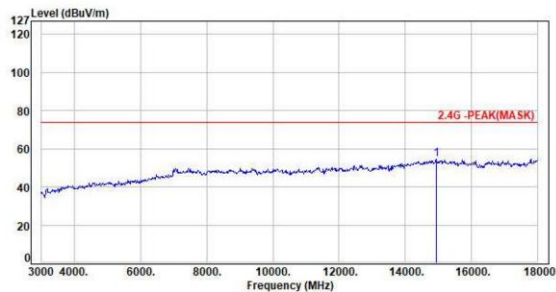


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14940.00	6.19	48.39	54.58	74.00	-19.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH01 6Mbps

Pol : Horizontal

Detector : Average

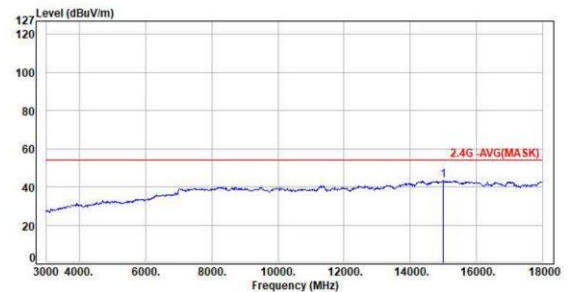

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14985.00	6.27	37.03	43.30	54.00	-10.70	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH06 6Mbps

Pol : Vertical

Detector : Peak

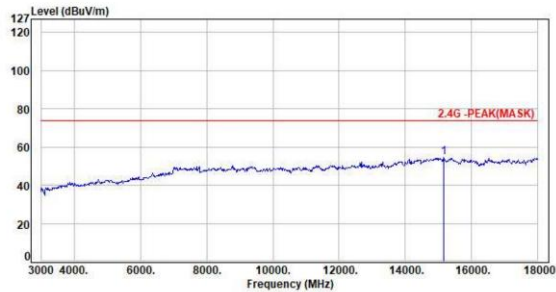


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15150.00	6.08	48.28	54.36	74.00	-19.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH06 6Mbps

Pol : Vertical

Detector : Average

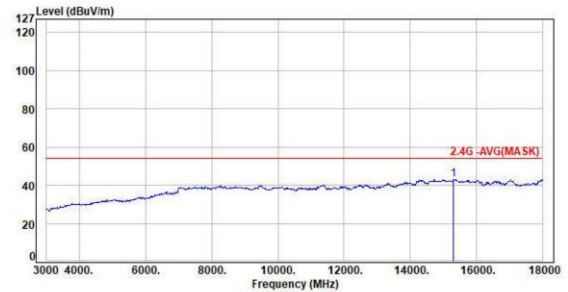


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15300.00	5.86	37.20	43.06	54.00	-10.94	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH06 6Mbps

Pol : Horizontal

Detector : Peak

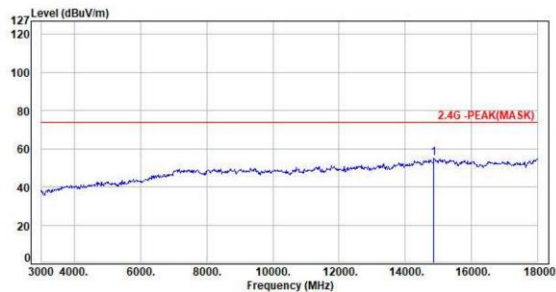


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14865.00	6.17	48.95	55.12	74.00	-18.88	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH06 6Mbps

Pol : Horizontal

Detector : Average

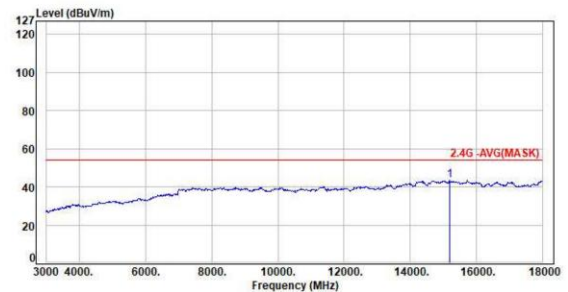

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15180.00	6.03	37.40	43.43	54.00	-10.57	Average	150	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH11 6Mbps

Pol : Vertical

Detector : Peak

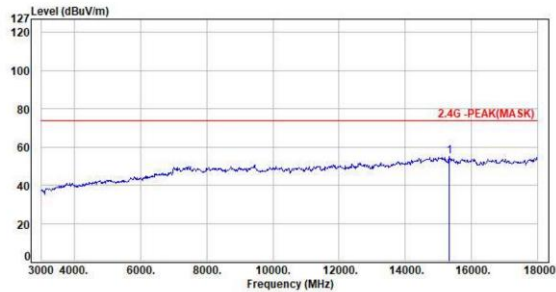


Frequency	Factor	Reading	Level	Limit	Margin	Detector	Height	Azimuth	P/F
No. (MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg)	
1 15330.00	5.75	49.14	54.89	74.00	-19.11	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH11 6Mbps

Pol : Vertical

Detector : Average

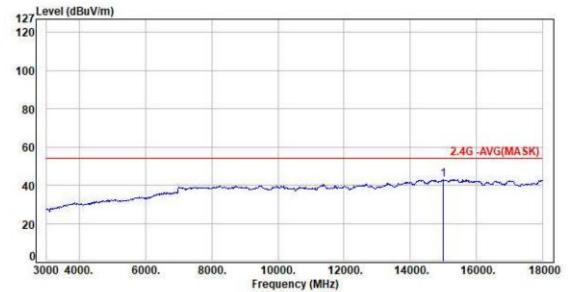


Frequency	Factor	Reading	Level	Limit	Margin	Detector	Height	Azimuth	P/F
No. (MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg)	
1 15000.00	6.30	36.83	43.13	54.00	-10.87	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH11 6Mbps

Pol : Horizontal

Detector : Peak

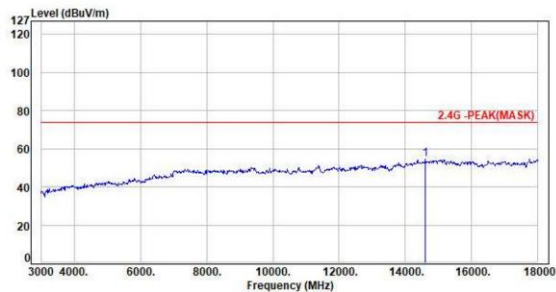


Frequency	Factor	Reading	Level	Limit	Margin	Detector	Height	Azimuth	P/F
No. (MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg)	
1 14610.00	6.16	48.52	54.68	74.00	-19.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11g CH11 6Mbps

Pol : Horizontal

Detector : Average

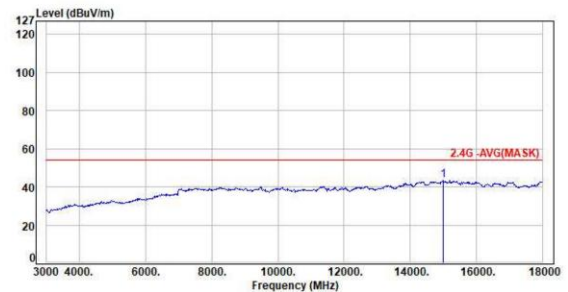


Frequency	Factor	Reading	Level	Limit	Margin	Detector	Height	Azimuth	P/F
No. (MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg)	
1 14985.00	6.27	37.14	43.41	54.00	-10.59	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Vertical Detector : Peak

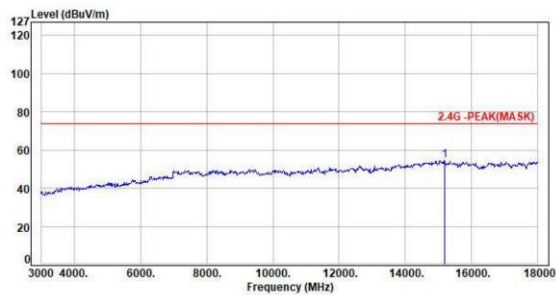

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15180.00	6.03	48.65	54.68	74.00	-19.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Vertical Detector : Average

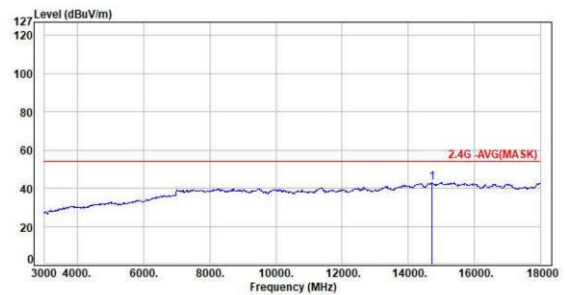

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14715.00	6.31	36.67	42.98	54.00	-11.02	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Peak

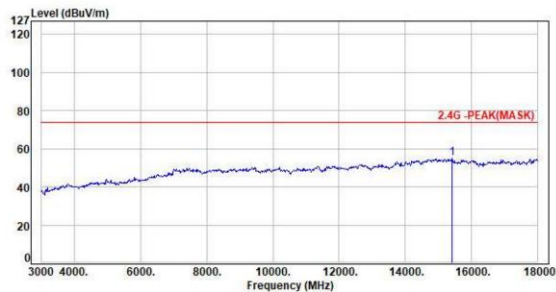

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15420.00	5.98	48.95	54.93	74.00	-19.07	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Average

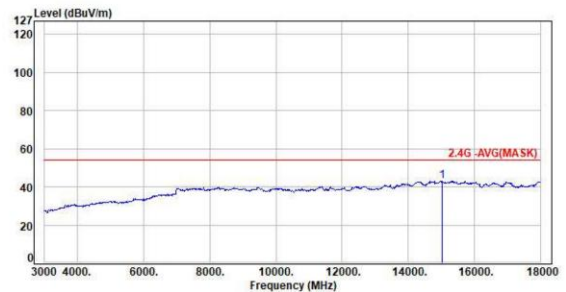


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15015.00	6.27	36.87	43.14	54.00	-10.86	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Vertical Detector : Peak

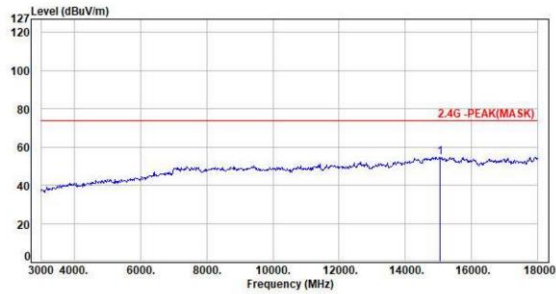

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15045.00	6.20	48.51	54.71	74.00	-19.29	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Vertical Detector : Average

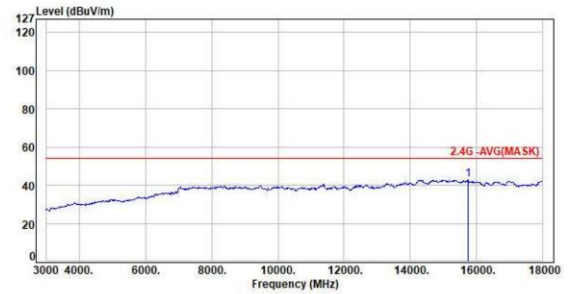

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15735.00	5.86	37.11	42.97	54.00	-11.03	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Horizontal Detector : Peak

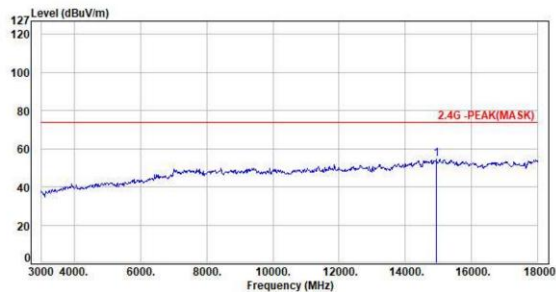

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14940.00	6.19	48.56	54.75	74.00	-19.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH06 NSS1 MCS0
Pol : Horizontal Detector : Average

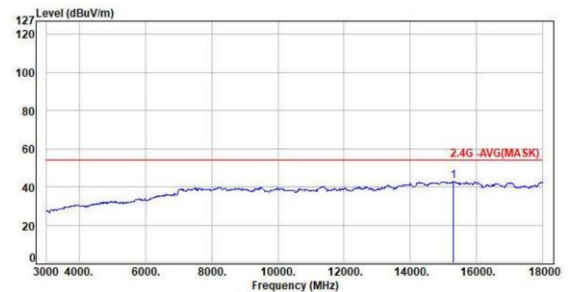

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15300.00	5.86	37.08	42.94	54.00	-11.06	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor