





Test Mode : 1TX 11ax40 CH118 NSS1 MCS0
Pol : Vertical Detector : Peak

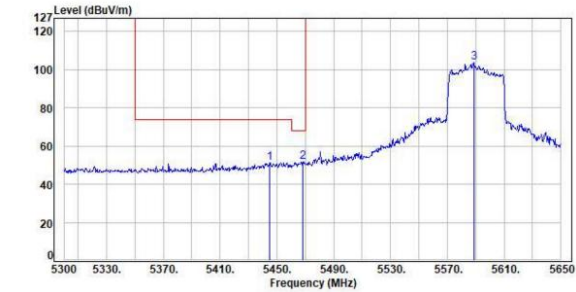

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5444.55	-0.21	51.49	51.28	74.00	-22.72	Peak	100	109	P
2	5468.35	-0.15	52.04	51.89	68.20	-16.31	Peak	100	109	P
3	5588.75	0.24	103.44	103.68	200.00	-96.32	Peak	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH118 NSS1 MCS0
Pol : Vertical Detector : Average

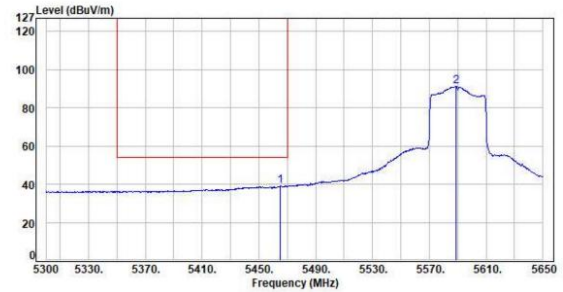

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5465.20	-0.17	39.24	39.07	54.00	-14.93	Average	100	109	P
2	5589.10	0.25	91.05	91.30	200.00	-108.70	Average	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH118 NSS1 MCS0
Pol : Horizontal Detector : Peak

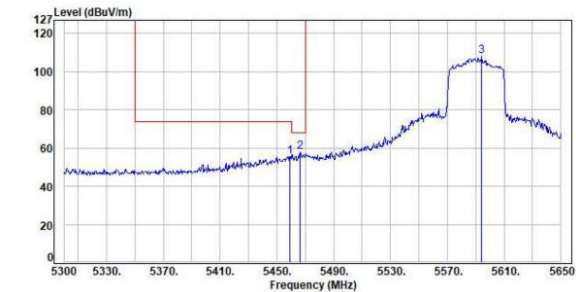

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5458.90	-0.18	55.84	55.66	74.00	-18.34	Peak	121	238	P
2	5466.25	-0.16	57.87	57.71	68.20	-10.49	Peak	121	238	P
3	5594.35	0.26	107.69	107.95	200.00	-92.05	Peak	121	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH118 NSS1 MCS0
Pol : Horizontal Detector : Average

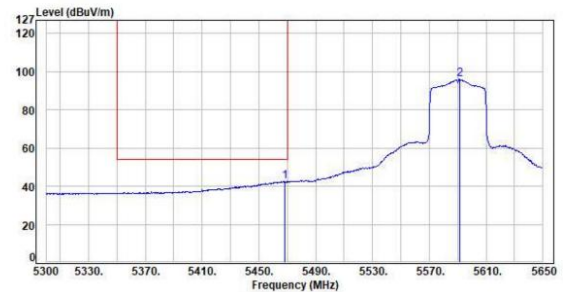


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5468.00	-0.15	42.66	42.51	54.00	-11.49	Average	121	238	P
2	5591.20	0.25	95.75	96.00	200.00	-104.00	Average	121	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH134 NSS1 MCS0
Pol : Vertical Detector : Peak

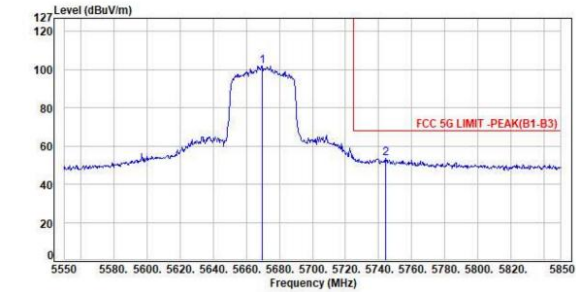

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5669.70	0.69	101.23	101.92	200.00	-98.08	Peak	164	109	P
2	5744.40	1.03	52.73	53.76	68.20	-14.44	Peak	164	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH134 NSS1 MCS0
Pol : Vertical Detector : Average

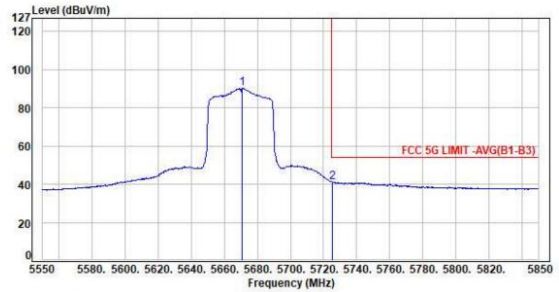

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.90	0.70	89.54	90.24	200.00	-109.76	Average	164	109	P
2	5725.50	0.96	40.05	41.01	54.00	-12.99	Average	164	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Peak

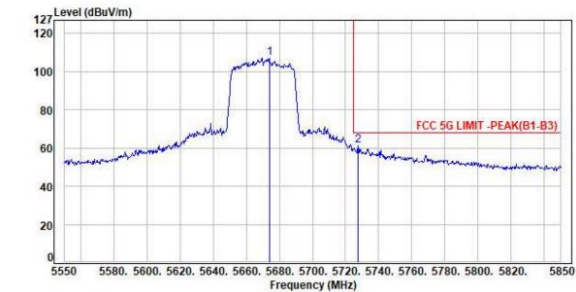

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5673.90	0.71	106.55	107.26	200.00	-92.74	Peak	118	238	P
2	5727.30	0.97	60.32	61.29	68.20	-6.91	Peak	118	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Average

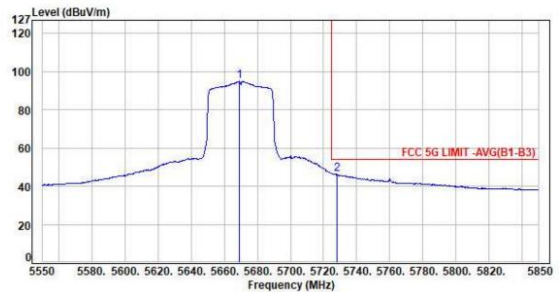


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5669.10	0.67	94.34	95.01	200.00	-104.99	Average	118	238	P
2	5727.90	0.97	45.57	46.54	54.00	-7.46	Average	118	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH106 NSS1 MCS0
Pol : Vertical Detector : Peak

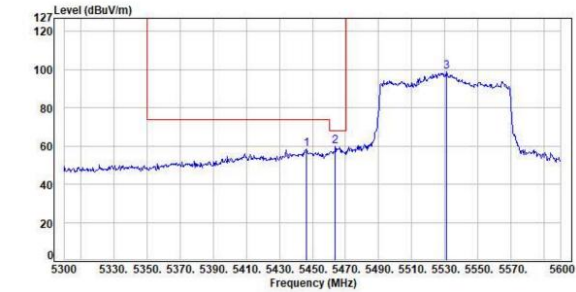

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5446.40	-0.21	58.45	58.24	74.00	-15.76	Peak	100	100	P
2	5463.80	-0.17	59.92	59.75	68.20	-8.45	Peak	100	100	P
3	5531.00	0.02	99.13	99.15	200.00	-100.85	Peak	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH106 NSS1 MCS0
Pol : Vertical Detector : Average

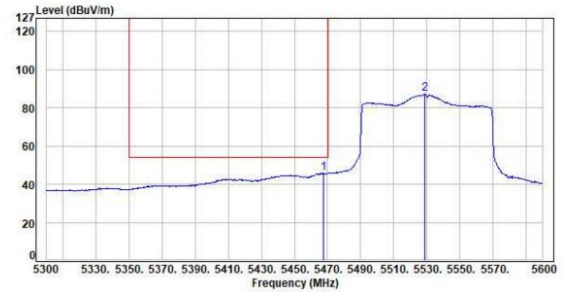

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5467.40	-0.16	45.85	45.69	54.00	-8.31	Average	100	100	P
2	5528.60	0.01	87.18	87.19	200.00	-112.81	Average	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Peak

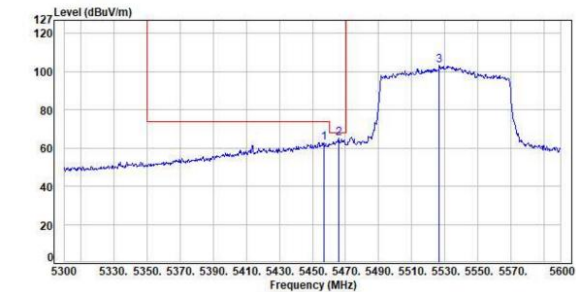

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5456.90	-0.19	63.14	62.95	74.00	-11.05	Peak	112	238	P
2	5465.60	-0.16	65.19	65.03	68.20	-3.17	Peak	112	238	P
3	5526.50	0.01	103.12	103.13	200.00	-96.87	Peak	112	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Average

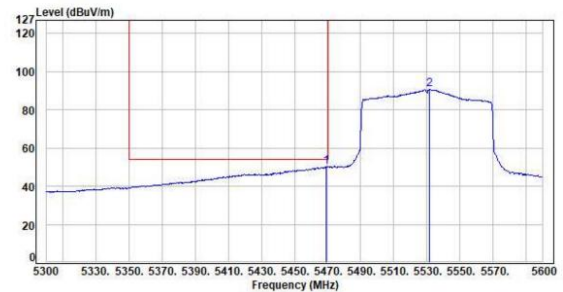


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5469.20	-0.16	50.36	50.20	54.00	-3.80	Average	112	238	P
2	5531.30	0.02	90.66	90.68	200.00	-109.32	Average	112	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH122 NSS1 MCS0
Pol : Vertical Detector : Peak

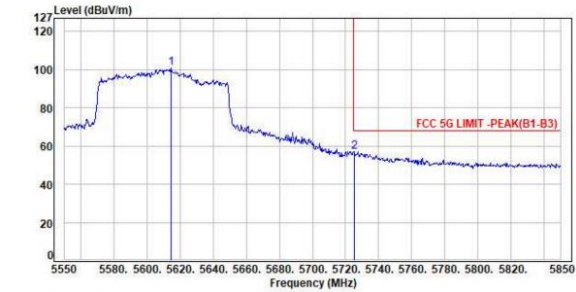

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5614.00	0.37	100.37	100.74	200.00	-99.26	Peak	100	109	P
2	5725.20	0.96	55.89	56.85	68.20	-11.35	Peak	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH122 NSS1 MCS0
Pol : Vertical Detector : Average

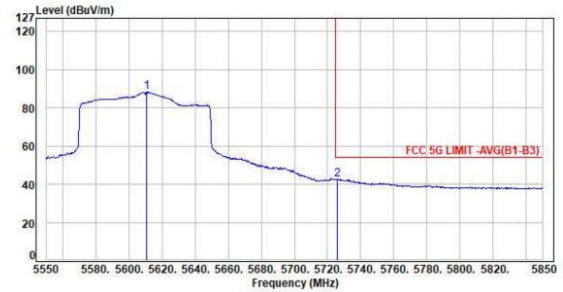

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5610.90	0.35	87.94	88.29	200.00	-111.71	Average	100	109	P
2	5726.10	0.96	41.64	42.60	54.00	-11.40	Average	100	109	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH122 NSS1 MCS0
Pol : Horizontal Detector : Peak

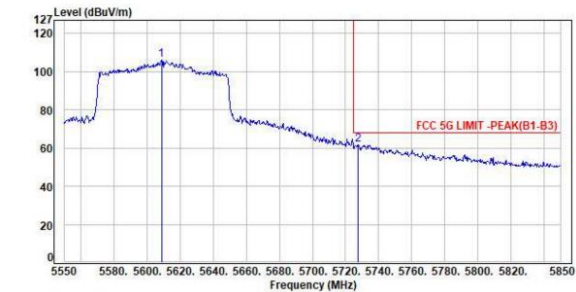

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5608.00	0.33	106.10	106.43	200.00	-93.57	Peak	119	238	P
2	5727.30	0.97	61.04	62.01	68.20	-6.19	Peak	119	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH122 NSS1 MCS0
Pol : Horizontal Detector : Average

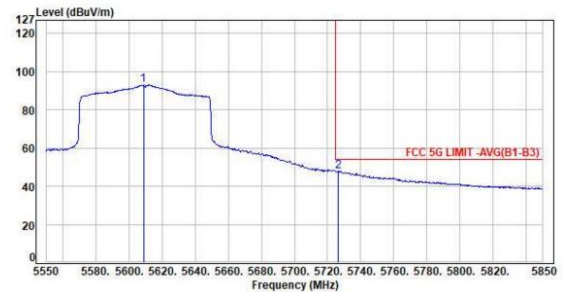


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5608.00	0.33	92.76	93.09	200.00	-106.91	Average	119	238	P
2	5726.40	0.97	47.03	48.00	54.00	-6.00	Average	119	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH114 NSS1 MCS0
Pol : Vertical Detector : Peak

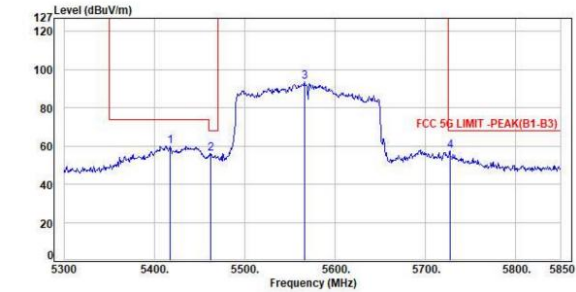

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5417.70	-0.25	60.31	60.06	74.00	-13.94	Peak	100	100	P
2	5462.80	-0.17	56.30	56.13	68.20	-12.07	Peak	100	100	P
3	5566.20	0.15	93.34	93.49	200.00	-106.51	Peak	100	100	P
4	5727.35	0.97	56.28	57.25	68.20	-10.95	Peak	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH114 NSS1 MCS0
Pol : Vertical Detector : Average

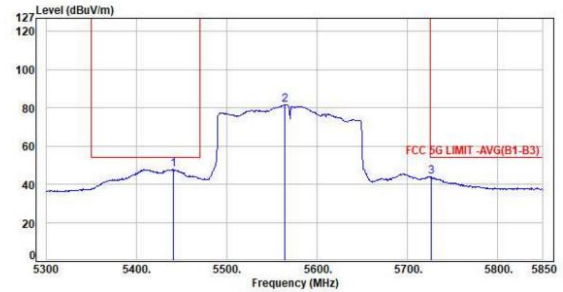

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5441.35	-0.21	48.03	47.82	54.00	-6.18	Average	100	100	P
2	5564.55	0.15	81.57	81.72	200.00	-118.28	Average	100	100	P
3	5726.25	0.96	43.14	44.10	54.00	-9.90	Average	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH114 NSS1 MCS0
Pol : Horizontal Detector : Peak

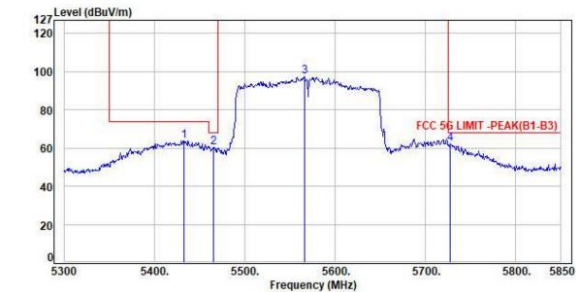

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5433.10	-0.23	64.10	63.87	74.00	-10.13	Peak	124	238	P
2	5465.55	-0.16	60.69	60.53	68.20	-7.67	Peak	124	238	P
3	5566.20	0.15	97.26	97.41	200.00	-102.59	Peak	124	238	P
4	5727.90	0.97	61.45	62.42	68.20	-5.78	Peak	124	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH114 NSS1 MCS0
Pol : Horizontal Detector : Average

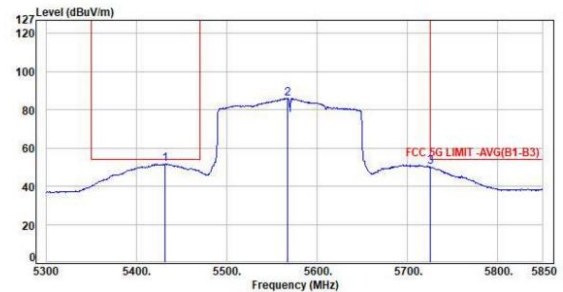


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5431.45	-0.24	52.03	51.79	54.00	-2.21	Average	124	238	P
2	5567.85	0.16	85.81	85.97	200.00	-114.03	Average	124	238	P
3	5725.70	0.96	49.06	50.02	54.00	-3.98	Average	124	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11a CH149 6Mbps
Pol : Vertical Detector : Peak

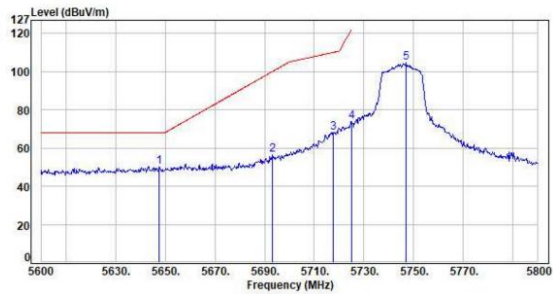

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5647.60	0.56	49.69	50.25	68.20	-17.95	Peak	100	88	P
2	5693.00	0.83	55.82	56.65	100.02	-43.37	Peak	100	88	P
3	5717.60	0.93	67.39	68.32	110.13	-41.81	Peak	100	88	P
4	5725.00	0.96	72.72	73.68	122.20	-48.52	Peak	100	88	P
5	5747.00	1.04	103.74	104.78	200.00	-95.22	Peak	100	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps
Pol : Horizontal Detector : Peak

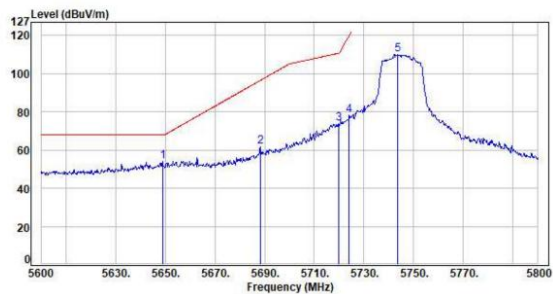


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5649.00	0.56	53.45	54.01	68.20	-14.19	Peak	116	237	P
2	5688.20	0.80	60.99	61.79	96.47	-34.68	Peak	116	237	P
3	5719.80	0.94	73.09	74.03	110.74	-36.71	Peak	116	237	P
4	5724.00	0.96	77.46	78.42	119.92	-41.50	Peak	116	237	P
5	5743.40	1.03	109.09	110.12	200.00	-89.88	Peak	116	237	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11a CH157 6Mbps
Pol : Vertical Detector : Peak

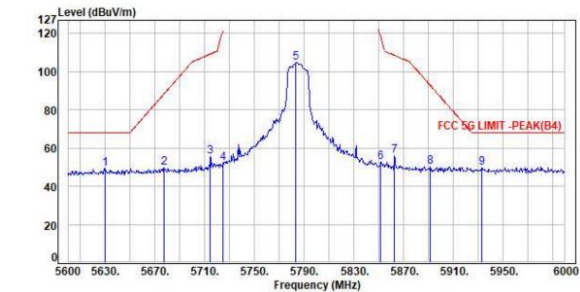

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5629.60	0.46	48.70	49.16	68.20	-19.04	Peak	181	90	P
2	5677.20	0.73	48.85	49.58	88.33	-38.75	Peak	181	90	P
3	5714.40	0.52	54.41	55.33	109.23	-53.90	Peak	181	90	P
4	5724.80	0.96	51.18	52.14	121.74	-69.60	Peak	181	90	P
5	5783.60	1.05	103.95	105.00	200.00	-95.00	Peak	181	90	P
6	5851.60	1.04	51.74	52.78	118.55	-65.77	Peak	181	90	P
7	5862.80	1.00	55.14	56.14	108.62	-52.48	Peak	181	90	P
8	5891.60	0.95	49.42	50.37	92.92	-42.55	Peak	181	90	P
9	5933.20	0.92	48.89	49.81	68.20	-18.39	Peak	181	90	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps
Pol : Horizontal Detector : Peak

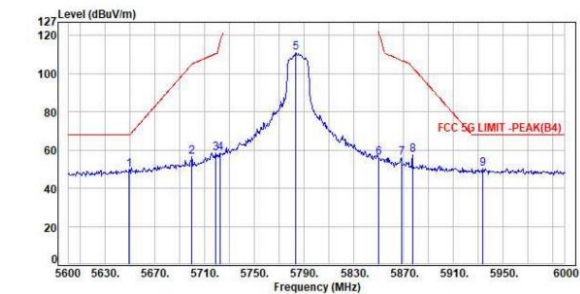

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5649.20	0.57	49.37	49.94	68.20	-18.26	Peak	117	240	P
2	5699.60	0.86	55.51	56.37	104.90	-48.53	Peak	117	240	P
3	5718.00	0.94	57.27	58.21	118.46	-52.25	Peak	117	240	P
4	5722.40	0.55	57.45	58.40	116.27	-57.87	Peak	117	240	P
5	5783.60	1.05	109.85	110.90	200.00	-89.10	Peak	117	240	P
6	5858.40	1.04	54.81	55.85	121.29	-65.44	Peak	117	240	P
7	5868.00	1.00	55.22	56.22	107.05	-50.83	Peak	117	240	P
8	5877.20	0.98	56.28	57.26	103.57	-46.31	Peak	117	240	P
9	5934.00	0.92	49.51	50.43	68.20	-17.77	Peak	117	240	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

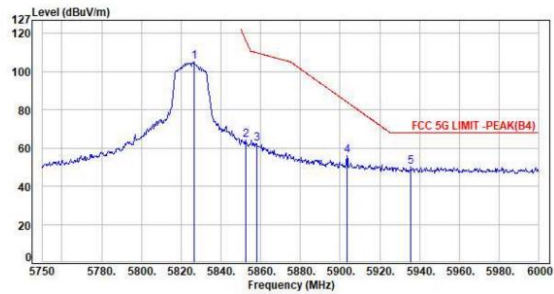

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5826.50	1.04	104.30	105.34	200.00	-94.66	Peak	176	90	P
2	5852.50	1.03	63.38	64.41	116.50	-52.09	Peak	176	90	P
3	5858.00	1.01	61.38	62.39	109.96	-47.57	Peak	176	90	P
4	5903.50	0.93	55.08	56.01	84.11	-28.10	Peak	176	90	P
5	5935.50	0.92	49.17	50.09	68.20	-18.11	Peak	176	90	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

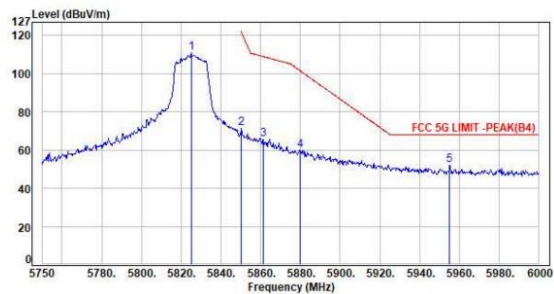

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	1.04	109.98	111.02	200.00	-88.98	Peak	120	240	P
2	5850.25	1.04	70.24	71.28	121.63	-50.35	Peak	120	240	P
3	5861.25	1.01	64.83	65.84	109.05	-43.21	Peak	120	240	P
4	5879.75	0.98	59.02	60.00	101.68	-41.68	Peak	120	240	P
5	5955.00	0.92	51.02	51.94	68.20	-16.26	Peak	120	240	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax20 CH149 NSS1 MCS0

Pol : Vertical

Detector : Peak

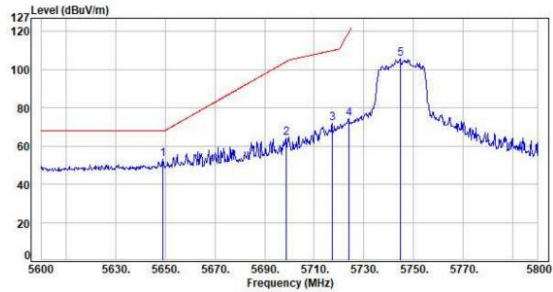

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5649.20	0.57	52.46	53.03	68.20	-15.17	Peak	100	87	P
2	5698.60	0.85	63.47	64.32	104.16	-39.84	Peak	100	87	P
3	5717.20	0.93	70.87	71.80	110.02	-38.22	Peak	100	87	P
4	5723.80	0.96	73.33	74.29	119.46	-45.17	Peak	100	87	P
5	5744.60	1.03	104.63	105.66	200.00	-94.34	Peak	100	87	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH149 NSS1 MCS0

Pol : Horizontal

Detector : Peak

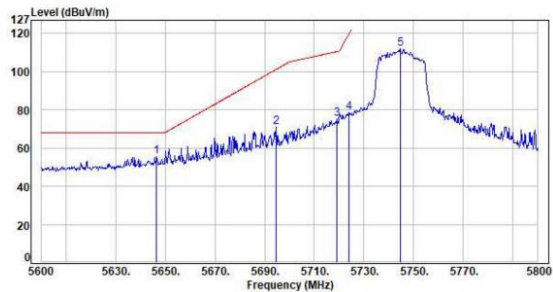

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5646.60	0.55	55.08	55.63	68.20	-12.57	Peak	115	238	P
2	5694.80	0.83	70.15	70.98	101.35	-30.37	Peak	115	238	P
3	5719.20	0.94	74.31	75.25	110.58	-35.33	Peak	115	238	P
4	5724.00	0.96	77.76	78.72	119.92	-41.20	Peak	115	238	P
5	5744.60	1.03	111.01	112.04	200.00	-87.96	Peak	115	238	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11aX20 CH157 NSS1 MCS0

Pol : Vertical

Detector : Peak

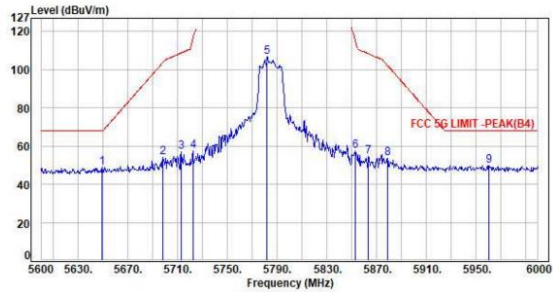

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5648.00	0.56	48.34	48.90	68.20	-19.30	Peak	183	90	P
2	5698.40	0.85	53.29	54.14	104.02	-49.88	Peak	183	90	P
3	5713.20	0.91	56.19	57.10	108.90	-51.80	Peak	183	90	P
4	5722.40	0.95	56.41	57.36	116.27	-58.91	Peak	183	90	P
5	5782.00	1.04	105.83	106.87	200.00	-93.13	Peak	183	90	P
6	5853.20	1.03	56.37	57.40	114.90	-57.50	Peak	183	90	P
7	5863.60	1.01	53.44	54.45	108.39	-53.94	Peak	183	90	P
8	5878.80	0.97	52.50	53.47	102.39	-48.92	Peak	183	90	P
9	5968.40	0.92	48.77	49.69	68.20	-18.51	Peak	183	90	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH157 NSS1 MCS0

Pol : Horizontal

Detector : Peak

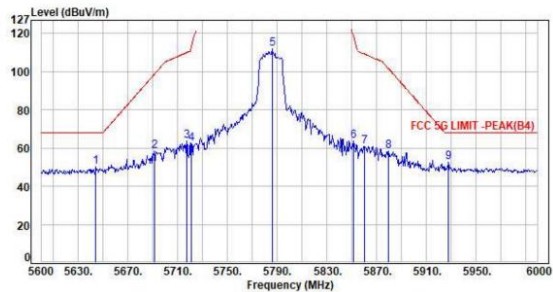

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5644.00	0.53	49.61	50.14	68.20	-18.06	Peak	116	240	P
2	5691.60	0.82	57.53	58.35	98.98	-40.63	Peak	116	240	P
3	5717.60	0.93	62.71	63.64	110.13	-46.49	Peak	116	240	P
4	5721.20	0.94	61.36	62.30	113.54	-51.24	Peak	116	240	P
5	5786.00	1.05	110.80	111.85	200.00	-88.15	Peak	116	240	P
6	5851.20	1.04	62.51	63.55	119.46	-55.91	Peak	116	240	P
7	5868.80	1.01	60.05	61.06	109.18	-48.12	Peak	116	240	P
8	5879.60	0.98	57.41	58.39	101.80	-43.41	Peak	116	240	P
9	5928.00	0.93	51.91	52.84	68.20	-15.36	Peak	116	240	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax20 CH165 NSS1 MCS0

Pol : Vertical

Detector : Peak

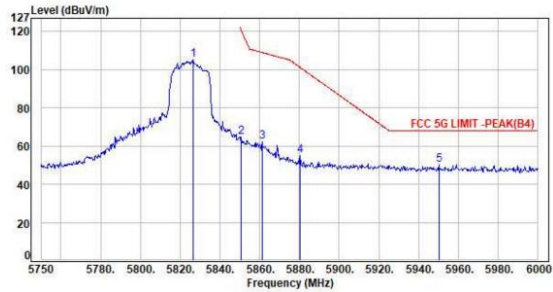

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5826.50	1.04	104.06	105.10	200.00	-94.90	Peak	177	89	P
2	5850.75	1.04	63.43	64.47	120.49	-56.02	Peak	177	89	P
3	5861.25	1.01	61.40	62.41	109.05	-46.64	Peak	177	89	P
4	5880.50	0.98	53.87	54.85	101.13	-46.28	Peak	177	89	P
5	5950.25	0.92	49.10	50.02	68.20	-18.18	Peak	177	89	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH165 NSS1 MCS0

Pol : Horizontal

Detector : Peak

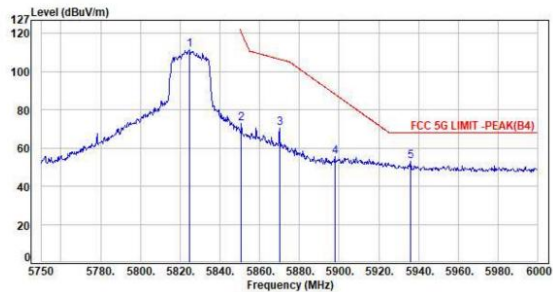

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5824.75	1.04	110.47	111.51	200.00	-88.49	Peak	123	240	P
2	5850.75	1.04	71.64	72.68	120.49	-47.81	Peak	123	240	P
3	5870.00	0.99	69.68	70.67	106.60	-35.93	Peak	123	240	P
4	5897.75	0.93	54.54	55.47	88.36	-32.89	Peak	123	240	P
5	5935.75	0.92	52.05	52.97	68.20	-15.23	Peak	123	240	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax40 CH151 NSS1 MCS0

Pol : Vertical

Detector : Peak

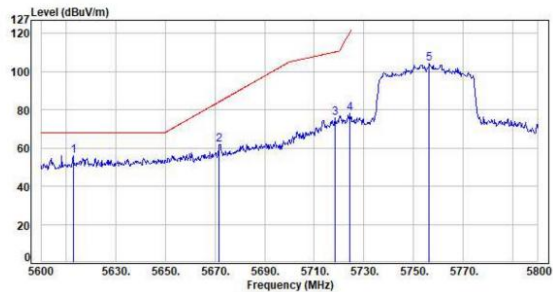

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5613.00	0.36	55.80	56.16	68.20	-12.04	Peak	102	90	P
2	5671.00	0.70	61.22	61.92	84.33	-22.41	Peak	102	90	P
3	5718.20	0.94	74.93	75.87	110.30	-34.43	Peak	102	90	P
4	5724.40	0.96	77.08	78.04	120.83	-42.79	Peak	102	90	P
5	5756.20	1.06	103.05	104.11	200.00	-95.89	Peak	102	90	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH151 NSS1 MCS0

Pol : Horizontal

Detector : Peak

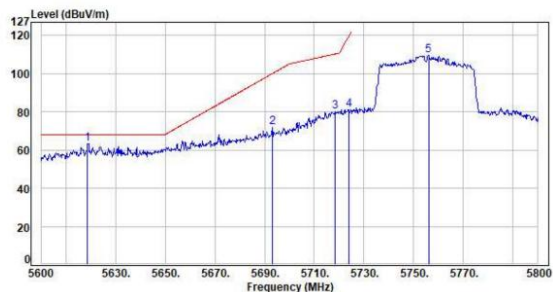

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5618.00	0.38	62.84	63.22	68.20	-4.98	Peak	106	237	P
2	5693.00	0.83	71.17	72.00	100.02	-28.02	Peak	106	237	P
3	5718.20	0.94	79.22	80.16	110.30	-30.14	Peak	106	237	P
4	5723.00	0.96	80.23	81.19	119.46	-38.27	Peak	106	237	P
5	5756.00	1.06	108.63	109.69	200.00	-90.31	Peak	106	237	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax40 CH159 NSS1 MCS0

Pol : Vertical

Detector : Peak

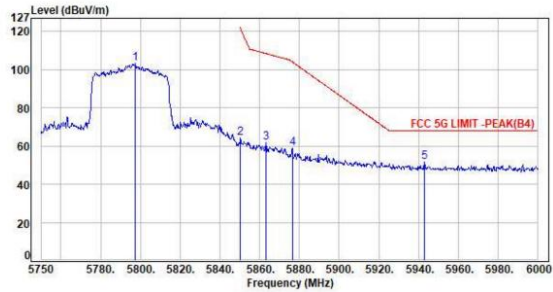

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5797.50	1.04	102.10	103.14	200.00	-96.86	Peak	170	89	P
2	5850.25	1.04	63.21	64.25	121.63	-57.38	Peak	170	89	P
3	5863.00	1.01	60.92	61.93	108.56	-46.63	Peak	170	89	P
4	5876.50	0.98	58.05	59.03	104.09	-45.06	Peak	170	89	P
5	5942.75	0.92	50.72	51.64	68.20	-16.56	Peak	170	89	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH159 NSS1 MCS0

Pol : Horizontal

Detector : Peak

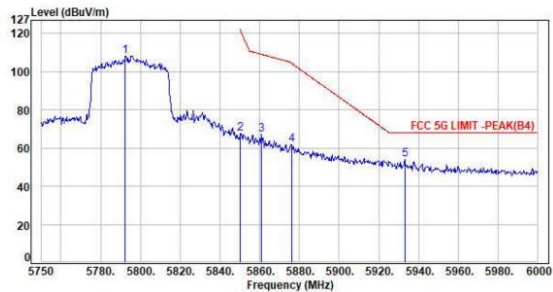

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5792.50	1.05	107.03	108.08	200.00	-91.92	Peak	108	236	P
2	5850.25	1.04	66.78	67.82	121.63	-53.81	Peak	108	236	P
3	5860.75	1.01	65.98	66.99	109.19	-42.20	Peak	108	236	P
4	5876.00	0.98	60.98	61.96	104.46	-42.50	Peak	108	236	P
5	5933.00	0.92	53.17	54.09	68.20	-14.11	Peak	108	236	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax80 CH155 NSS1 MCS0

Pol : Vertical

Detector : Peak

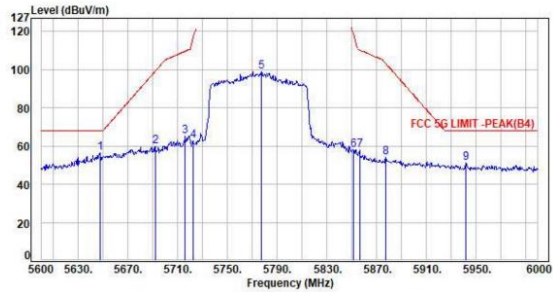

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5647.60	0.56	55.70	56.26	68.20	-11.94	Peak	183	89	P
2	5692.00	0.82	59.02	59.84	99.28	-39.44	Peak	183	89	P
3	5716.00	0.92	64.28	65.20	109.68	-44.48	Peak	183	89	P
4	5722.40	0.95	61.62	62.57	116.27	-53.70	Peak	183	89	P
5	5772.20	1.05	97.99	99.04	200.00	-100.96	Peak	183	89	P
6	5851.20	1.04	57.08	58.12	119.46	-61.34	Peak	183	89	P
7	5856.40	1.02	56.81	57.83	110.41	-52.58	Peak	183	89	P
8	5877.20	0.98	53.04	54.02	103.57	-49.55	Peak	183	89	P
9	5942.00	0.92	50.26	51.18	68.20	-17.02	Peak	183	89	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH155 NSS1 MCS0

Pol : Horizontal

Detector : Peak

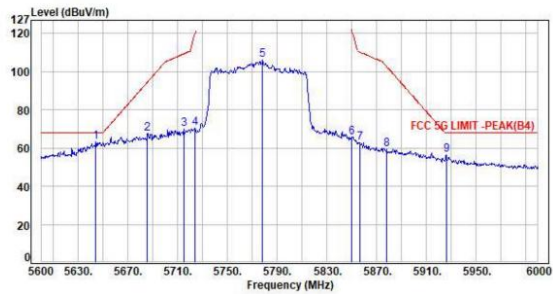

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5644.00	0.53	62.64	63.17	68.20	-5.03	Peak	113	240	P
2	5685.60	0.78	66.62	67.40	94.54	-27.14	Peak	113	240	P
3	5714.80	0.92	69.23	70.15	109.34	-39.19	Peak	113	240	P
4	5724.00	0.96	69.52	70.48	119.92	-49.44	Peak	113	240	P
5	5772.40	1.05	105.00	106.05	200.00	-93.95	Peak	113	240	P
6	5850.40	1.04	64.72	65.76	121.29	-55.53	Peak	113	240	P
7	5856.40	1.02	61.88	62.90	110.41	-47.51	Peak	113	240	P
8	5878.40	0.97	58.55	59.52	102.68	-43.16	Peak	113	240	P
9	5926.40	0.92	55.75	56.67	68.20	-11.53	Peak	113	240	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11a CH144 6Mbps
Pol : Vertical Detector : Peak

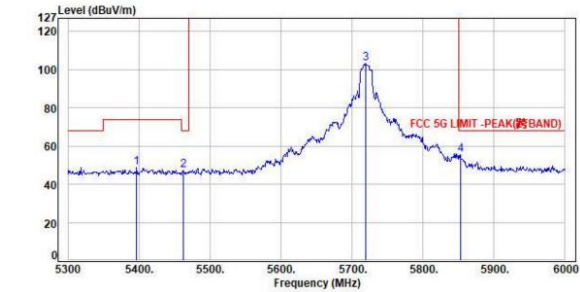

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5396.60	-0.30	48.84	48.54	74.00	-25.46	Peak	184	88	P
2	5462.40	-0.18	47.71	47.53	68.20	-20.67	Peak	184	88	P
3	5728.00	0.94	102.50	103.44	200.00	-96.56	Peak	184	88	P
4	5853.00	1.03	54.66	55.69	68.20	-12.51	Peak	184	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH144 6Mbps
Pol : Vertical Detector : Average

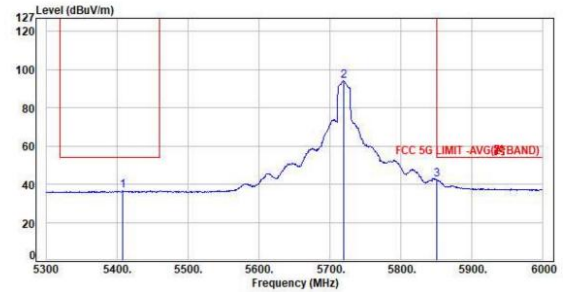

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5408.50	-0.28	36.87	36.59	54.00	-17.41	Average	184	88	P
2	5719.30	0.94	93.22	94.16	200.00	-105.84	Average	184	88	P
3	5850.90	1.04	41.47	42.51	54.00	-11.49	Average	184	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH144 6Mbps
Pol : Horizontal Detector : Peak

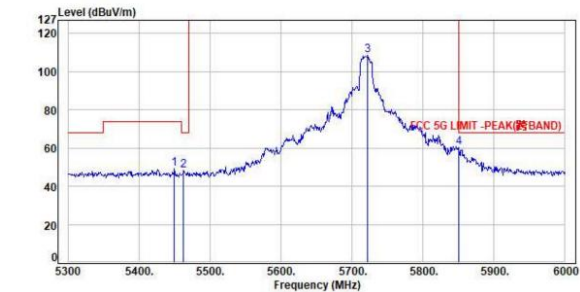

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5449.80	-0.20	49.34	49.14	74.00	-24.86	Peak	127	238	P
2	5463.10	-0.17	48.42	48.25	68.20	-19.95	Peak	127	238	P
3	5722.10	0.95	107.55	108.50	200.00	-91.50	Peak	127	238	P
4	5858.20	1.04	59.43	60.47	68.20	-7.73	Peak	127	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH144 6Mbps
Pol : Horizontal Detector : Average

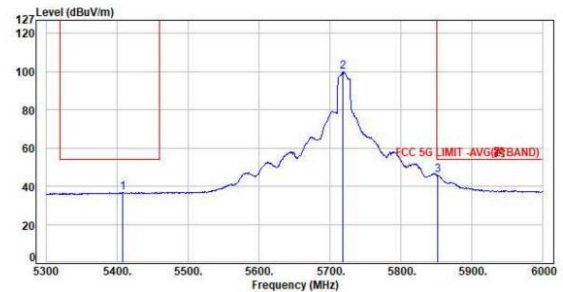


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5408.50	-0.28	37.04	36.76	54.00	-17.24	Average	127	238	P
2	5717.90	0.94	99.00	99.94	200.00	-100.06	Average	127	238	P
3	5851.60	1.04	44.94	45.98	54.00	-8.02	Average	127	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH144 NSS1 MCS0
Pol : Vertical Detector : Peak

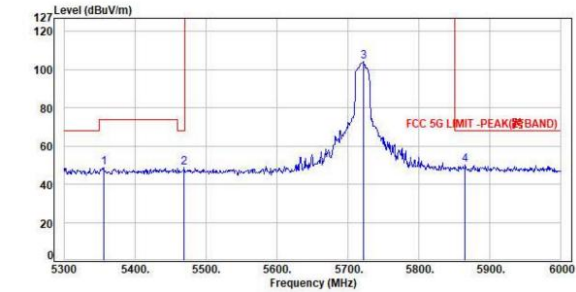

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5356.00	-0.37	48.96	48.59	74.00	-25.41	Peak	103	89	P
2	5469.40	-0.16	48.99	48.83	68.20	-19.37	Peak	103	89	P
3	5722.10	0.95	103.49	104.44	200.00	-95.56	Peak	103	89	P
4	5864.90	1.01	49.32	50.33	68.20	-17.87	Peak	103	89	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH144 NSS1 MCS0
Pol : Vertical Detector : Average

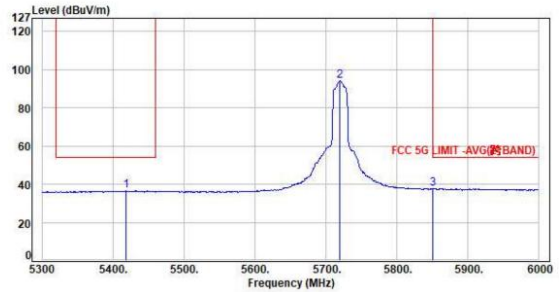

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5419.00	-0.26	36.92	36.66	54.00	-17.34	Average	103	89	P
2	5720.00	0.94	93.27	94.21	200.00	-105.79	Average	103	89	P
3	5850.90	1.04	36.74	37.78	54.00	-16.22	Average	103	89	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH144 NSS1 MCS0
Pol : Horizontal Detector : Peak

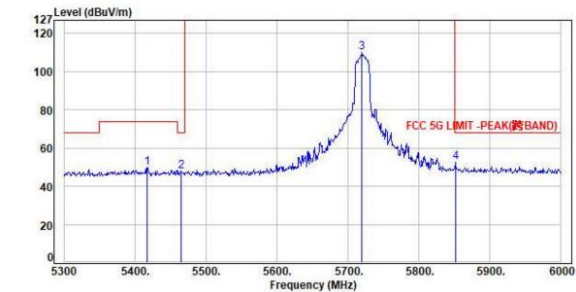

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5417.60	-0.25	50.06	49.81	74.00	-24.19	Peak	109	236	P
2	5464.50	-0.17	48.17	48.00	68.20	-20.20	Peak	109	236	P
3	5720.00	0.94	100.95	101.89	200.00	-98.11	Peak	109	236	P
4	5851.60	1.04	51.59	52.63	68.20	-15.57	Peak	109	236	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH144 NSS1 MCS0
Pol : Horizontal Detector : Average

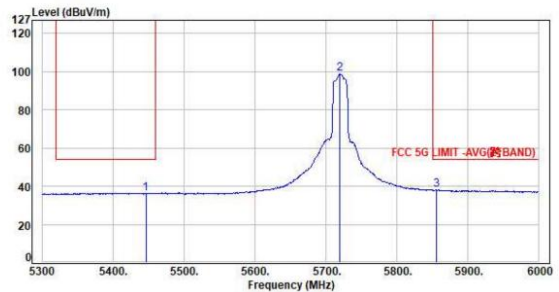


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5446.30	-0.21	36.65	36.44	54.00	-17.56	Average	109	236	P
2	5719.30	0.94	97.82	98.76	200.00	-101.24	Average	109	236	P
3	5855.10	1.03	37.01	38.04	54.00	-15.96	Average	109	236	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH142 NSS1 MCS0
Pol : Vertical Detector : Peak

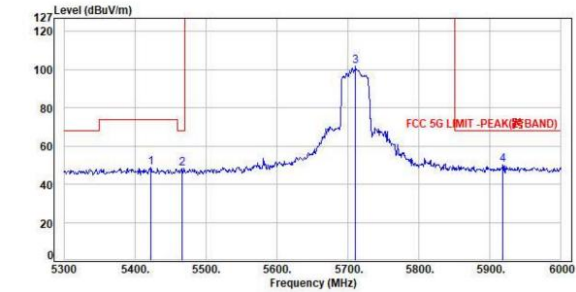

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5422.50	-0.25	48.96	48.71	74.00	-25.29	Peak	106	88	P
2	5466.60	-0.16	48.26	48.10	68.20	-20.10	Peak	106	88	P
3	5718.90	0.90	100.79	101.69	200.00	-98.31	Peak	106	88	P
4	5918.10	0.93	49.45	50.38	68.20	-17.82	Peak	106	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH142 NSS1 MCS0
Pol : Vertical Detector : Average

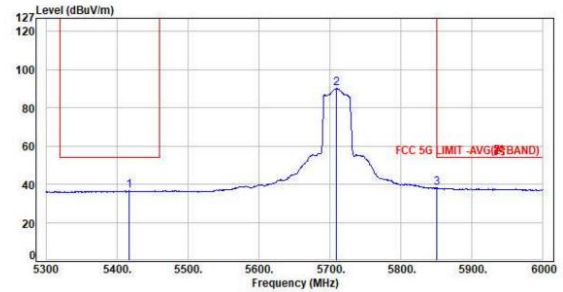

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5417.60	-0.25	36.76	36.51	54.00	-17.49	Average	106	88	P
2	5708.00	0.90	89.58	90.48	200.00	-109.52	Average	106	88	P
3	5850.90	1.04	36.92	37.96	54.00	-16.04	Average	106	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH142 NSS1 MCS0
Pol : Horizontal Detector : Peak

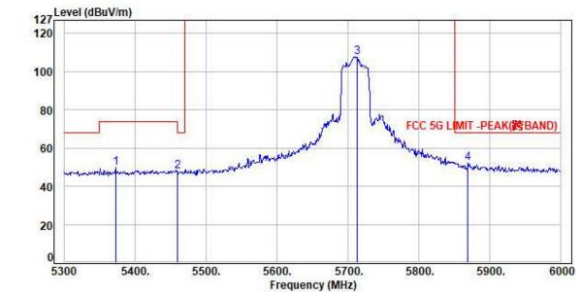

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5372.00	-0.34	50.05	49.71	74.00	-24.29	Peak	100	241	P
2	5468.30	-0.18	47.96	47.78	68.20	-20.42	Peak	100	241	P
3	5713.00	0.91	106.88	107.79	200.00	-92.21	Peak	100	241	P
4	5869.10	0.99	51.34	52.33	68.20	-15.87	Peak	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH142 NSS1 MCS0
Pol : Horizontal Detector : Average

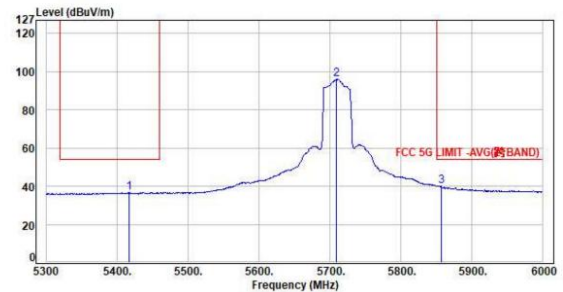


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5416.90	-0.26	36.92	36.66	54.00	-17.34	Average	100	241	P
2	5708.00	0.90	95.35	96.25	200.00	-103.75	Average	100	241	P
3	5857.20	1.02	39.02	40.04	54.00	-13.96	Average	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH138 NSS1 MCS0
Pol : Vertical Detector : Peak

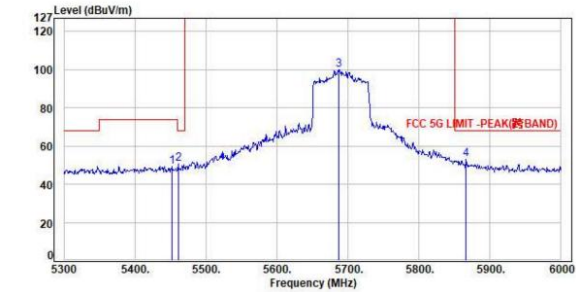

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5451.90	-0.19	49.65	49.46	74.00	-24.54	Peak	100	89	P
2	5461.00	-0.18	51.11	50.93	68.20	-17.27	Peak	100	89	P
3	5685.40	0.79	99.16	99.95	200.00	-100.05	Peak	100	89	P
4	5866.30	1.01	52.11	53.12	68.20	-15.08	Peak	100	89	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH138 NSS1 MCS0
Pol : Vertical Detector : Average

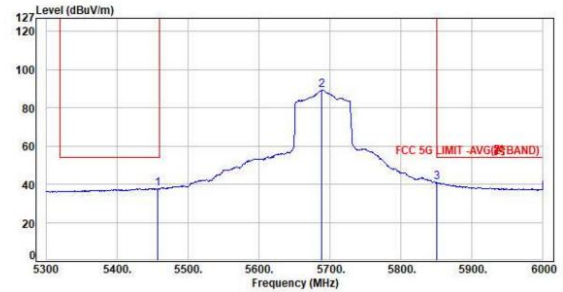

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5457.50	-0.18	37.87	37.69	54.00	-16.31	Average	100	89	P
2	5685.50	0.80	88.43	89.23	200.00	-110.77	Average	100	89	P
3	5850.20	1.04	39.92	40.96	54.00	-13.04	Average	100	89	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH138 NSS1 MCS0
Pol : Horizontal Detector : Peak

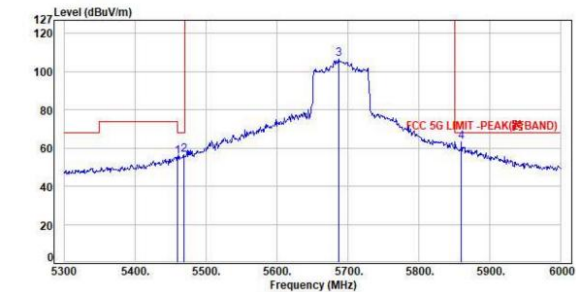

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5459.60	-0.18	55.77	55.59	74.00	-18.41	Peak	120	238	P
2	5468.70	-0.15	56.79	56.64	68.20	-11.56	Peak	120	238	P
3	5685.40	0.79	105.83	106.62	200.00	-93.38	Peak	120	238	P
4	5868.00	1.01	62.45	63.46	68.20	-4.74	Peak	120	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH138 NSS1 MCS0
Pol : Horizontal Detector : Average

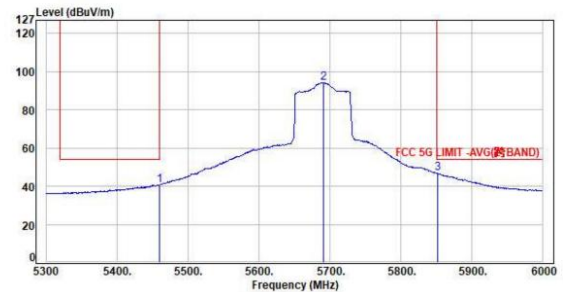


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5459.60	-0.18	40.95	40.77	54.00	-13.23	Average	120	238	P
2	5691.30	0.82	93.56	94.38	200.00	-105.62	Average	120	238	P
3	5851.60	1.04	46.03	47.07	54.00	-6.93	Average	120	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax160 CH50 NSS1 MCS0
Pol : Vertical Detector : Peak

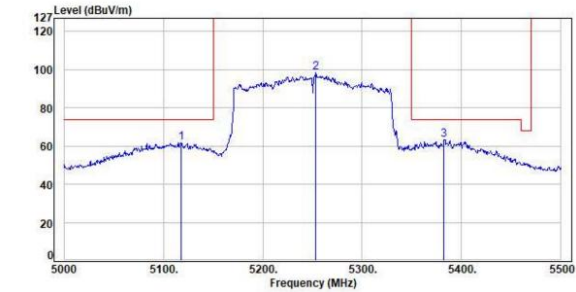

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5117.50	-0.01	61.95	61.94	74.00	-12.06	Peak	100	84	P
2	5253.50	-0.29	98.80	98.51	200.00	-101.49	Peak	100	84	P
3	5382.50	-0.33	63.62	63.29	74.00	-10.71	Peak	100	84	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH50 NSS1 MCS0
Pol : Vertical Detector : Average

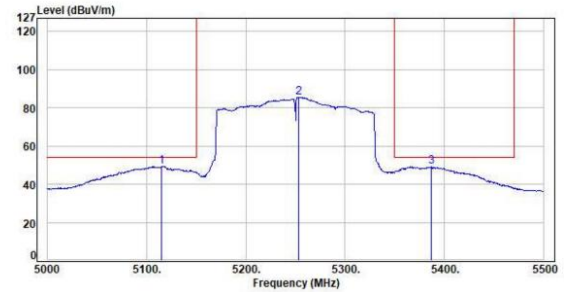

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5115.00	0.00	49.46	49.46	54.00	-4.54	Average	100	84	P
2	5253.00	-0.29	85.96	85.67	200.00	-114.33	Average	100	84	P
3	5387.00	-0.32	49.37	49.05	54.00	-4.95	Average	100	84	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax160 CH50 NSS1 MCS0
Pol : Horizontal Detector : Peak

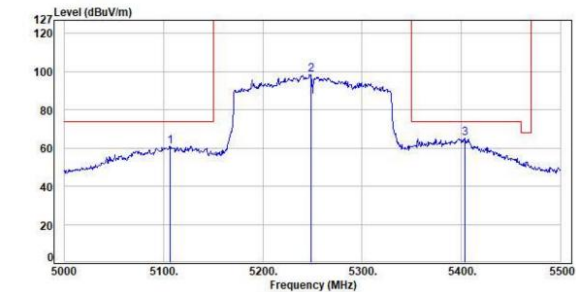

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5106.50	0.02	60.90	60.92	74.00	-13.08	Peak	100	231	P
2	5248.50	-0.27	98.85	98.58	200.00	-101.42	Peak	100	231	P
3	5403.00	-0.28	65.46	65.18	74.00	-8.82	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax160 CH50 NSS1 MCS0
Pol : Horizontal Detector : Average

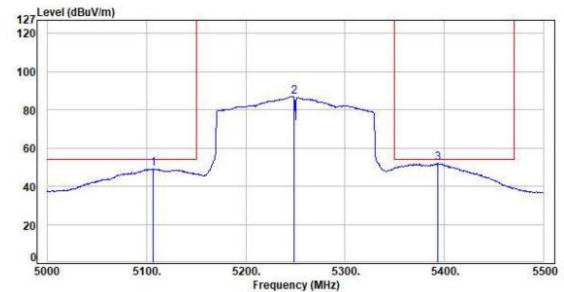

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5106.50	0.02	49.47	49.49	54.00	-4.51	Average	100	231	P
2	5248.50	-0.27	87.22	86.95	200.00	-113.05	Average	100	231	P
3	5393.00	-0.30	52.23	51.93	54.00	-2.07	Average	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




6.7. Test Result and Data (1GHz ~ 7GHz)

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Peak

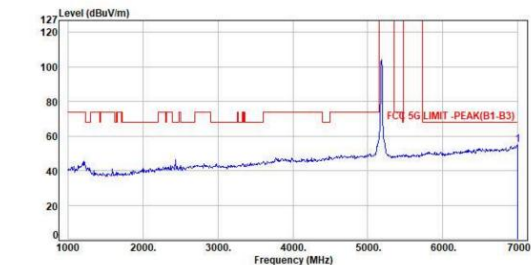

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	3.65	51.36	55.01	68.20	-13.19	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Average

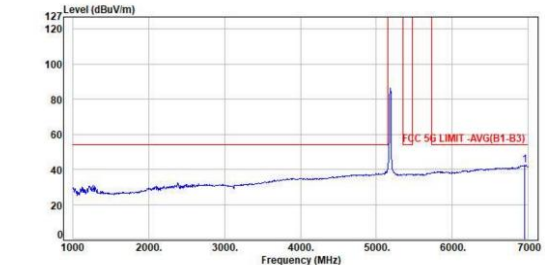

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	3.72	38.64	42.36	54.00	-11.64	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Peak

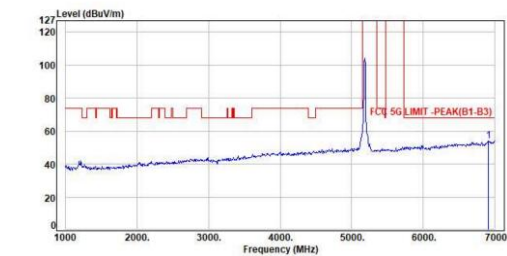

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6904.00	3.76	50.40	54.16	68.20	-14.04	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Average

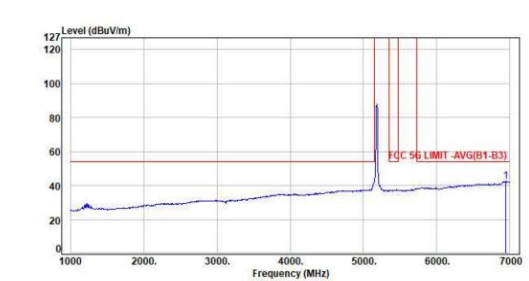

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	3.74	38.75	42.49	54.00	-11.51	Average	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Peak

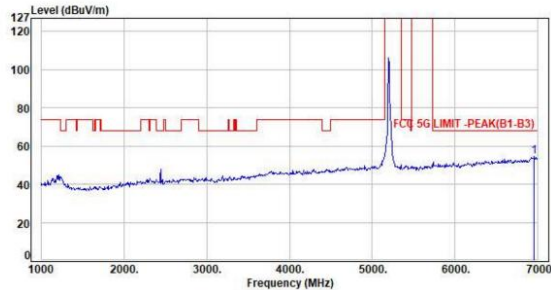

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	3.72	51.03	54.75	68.20	-13.45	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Average

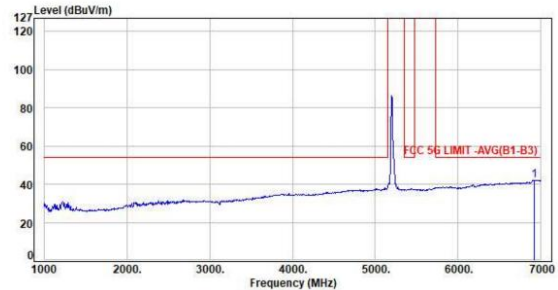

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6922.00	3.76	38.43	42.19	54.00	-11.81	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Peak

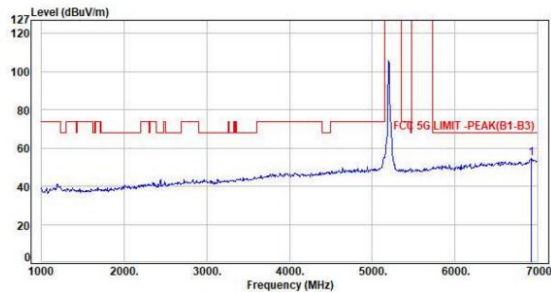

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6916.00	3.75	50.77	54.52	68.20	-13.68	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Average

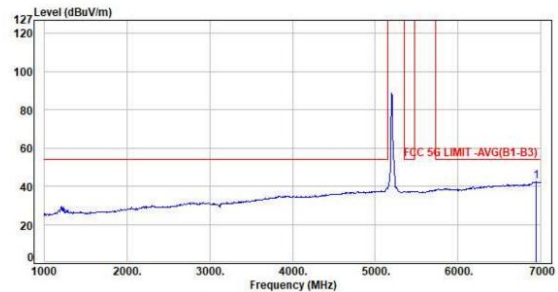

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6940.00	3.75	38.52	42.27	54.00	-11.73	Average	100	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11a CH48 6Mbps
Pol : Vertical Detector : Peak

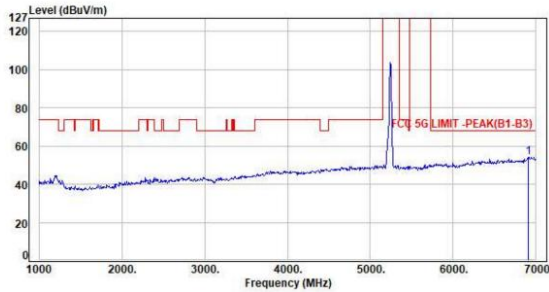

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6984.00	3.76	50.53	54.29	68.20	-13.91	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH48 6Mbps
Pol : Vertical Detector : Average

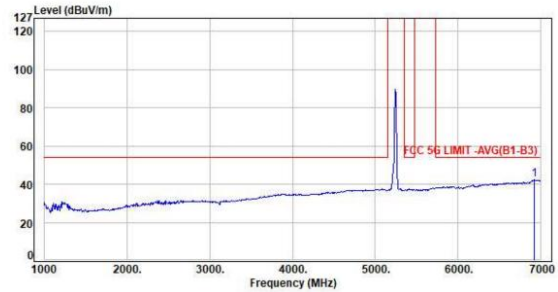

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6922.00	3.76	38.50	42.26	54.00	-11.74	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH48 6Mbps
Pol : Horizontal Detector : Peak

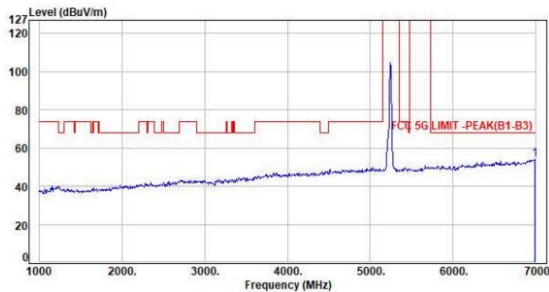

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	3.68	50.27	53.95	68.20	-14.25	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps
Pol : Horizontal Detector : Average

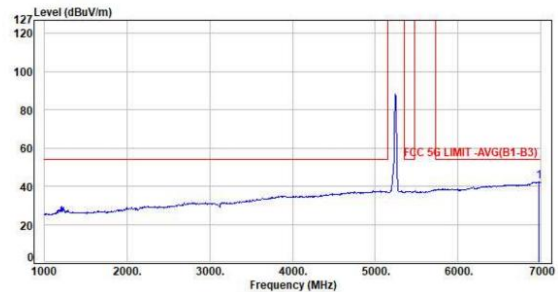


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	3.68	38.81	42.49	54.00	-11.51	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH36 NSS1 MCS0
Pol : Vertical Detector : Peak

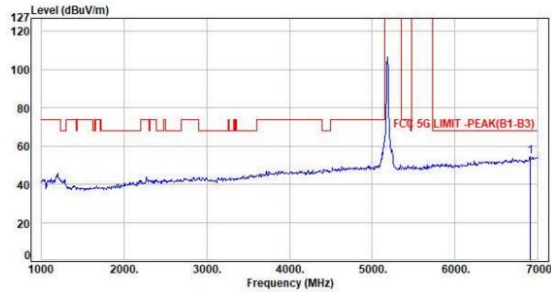

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6904.00	3.76	50.67	54.43	68.20	-13.77	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH36 NSS1 MCS0
Pol : Vertical Detector : Average

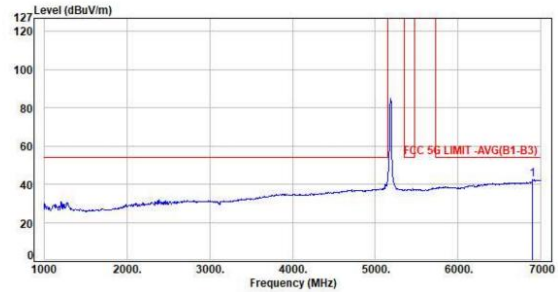

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6898.00	3.75	38.72	42.47	54.00	-11.53	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH36 NSS1 MCS0
Pol : Horizontal Detector : Peak

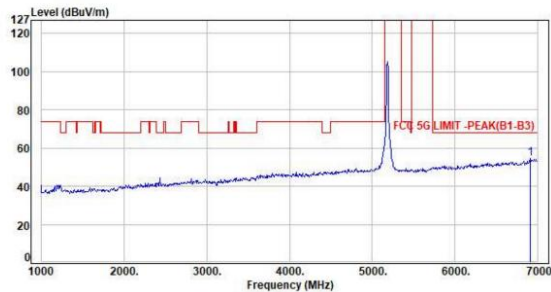

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6904.00	3.76	50.74	54.50	68.20	-13.70	Peak	100	48	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH36 NSS1 MCS0
Pol : Horizontal Detector : Average

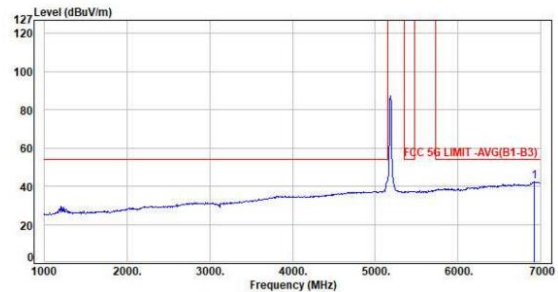


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6916.00	3.75	38.58	42.33	54.00	-11.67	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Peak

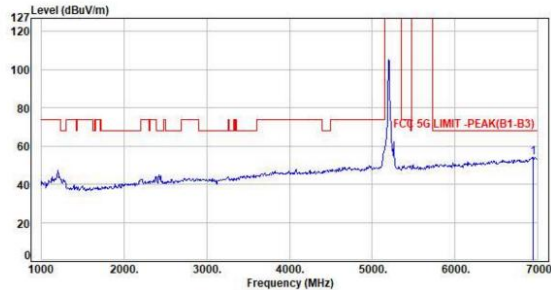

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	3.74	50.54	54.28	68.20	-13.92	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Average

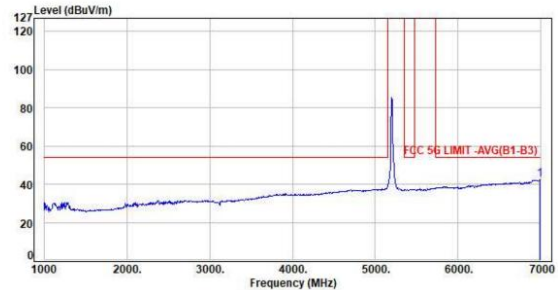

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	3.68	38.64	42.32	54.00	-11.68	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Peak

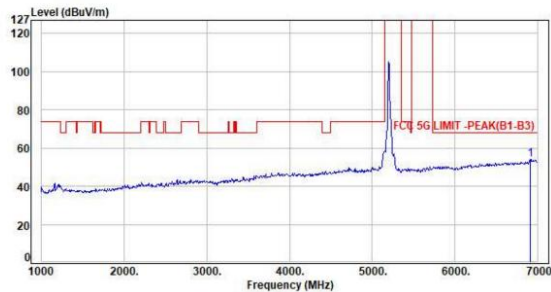

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6984.00	3.76	50.51	54.27	68.20	-13.93	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Average

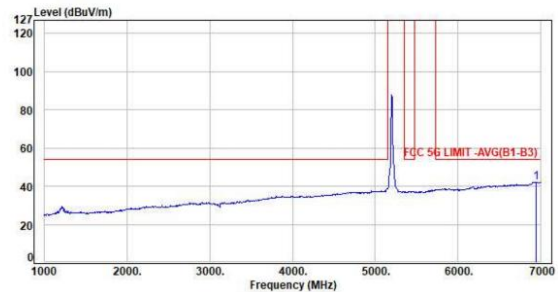


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	3.74	38.36	42.10	54.00	-11.90	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Peak

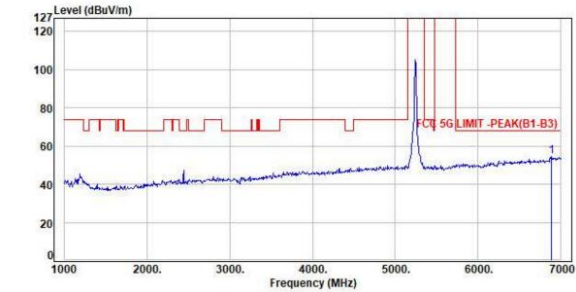

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6886.00	3.70	50.64	54.34	68.20	-13.86	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Average

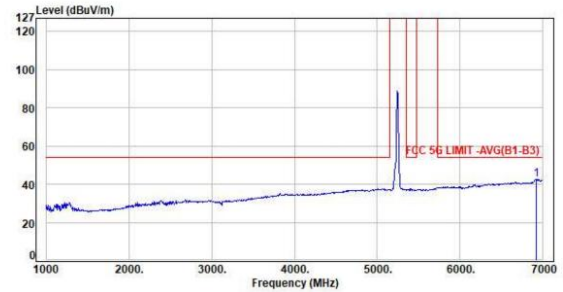

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6916.00	3.75	38.89	42.64	54.00	-11.36	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Peak

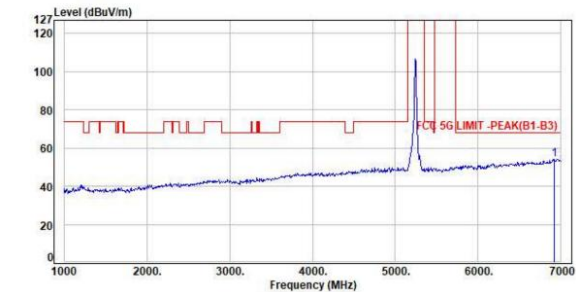

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6922.00	3.76	50.41	54.17	68.20	-14.03	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Average

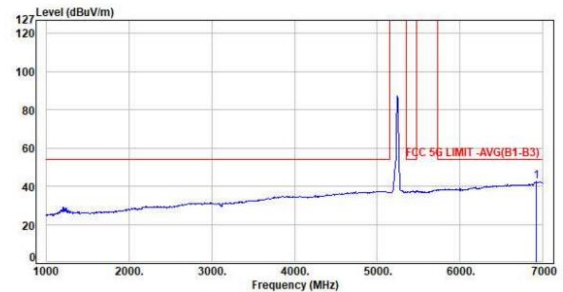


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6916.00	3.75	38.58	42.33	54.00	-11.67	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH38 NSS1 MCS0
Pol : Vertical Detector : Peak

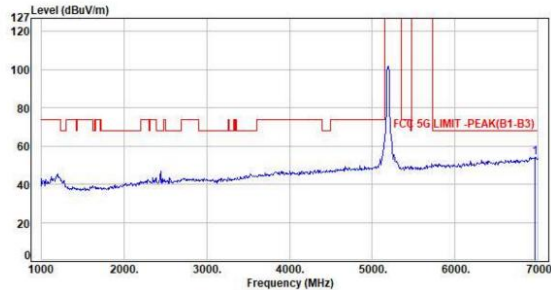

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5964.00	3.71	50.41	54.12	68.20	-14.08	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH38 NSS1 MCS0
Pol : Vertical Detector : Average

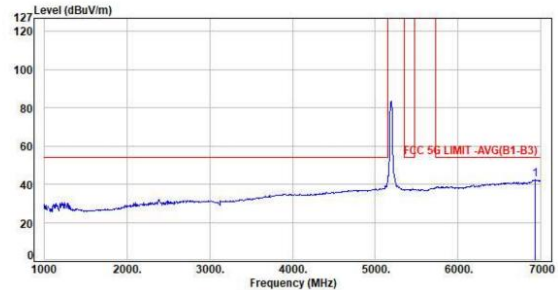

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5928.00	3.75	38.62	42.37	54.00	-11.63	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Peak

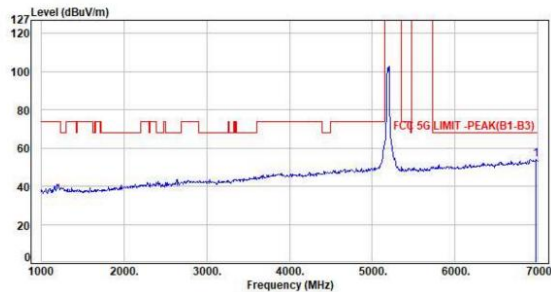

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5976.00	3.68	50.62	54.30	68.20	-13.90	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Average

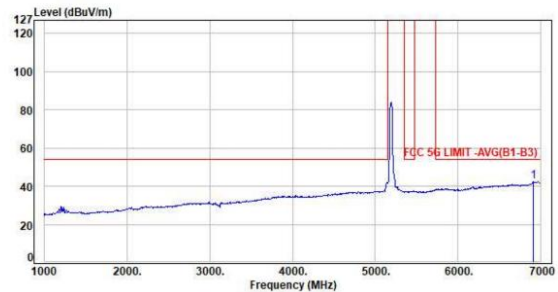


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5904.00	3.76	38.51	42.27	54.00	-11.73	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Peak

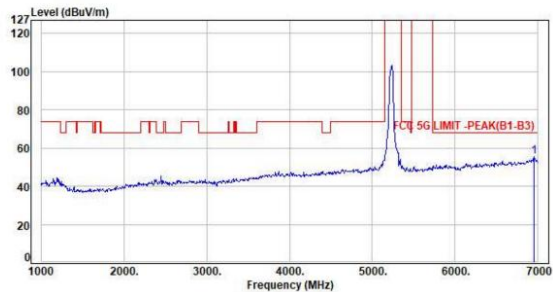

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	3.72	51.71	55.43	68.20	-12.77	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Average

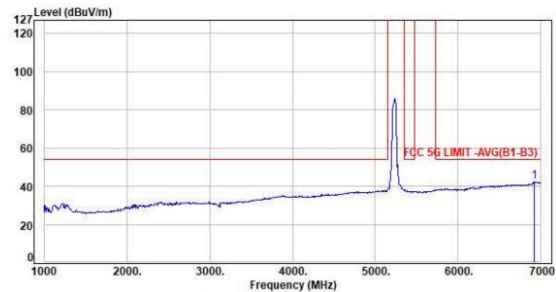

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6916.00	3.75	38.55	42.30	54.00	-11.70	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Peak

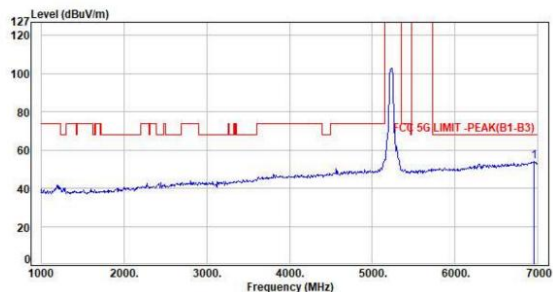

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	3.72	50.31	54.03	68.20	-14.17	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Average

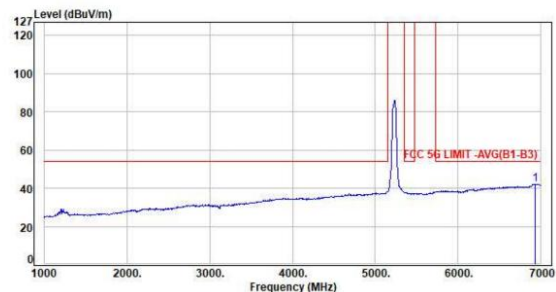


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	3.75	38.43	42.18	54.00	-11.82	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH42 NSS1 MCS0
Pol : Vertical Detector : Peak

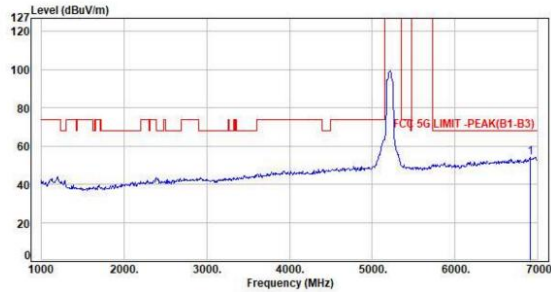

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6964.00	3.76	50.41	54.17	68.20	-14.03	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH42 NSS1 MCS0
Pol : Vertical Detector : Average

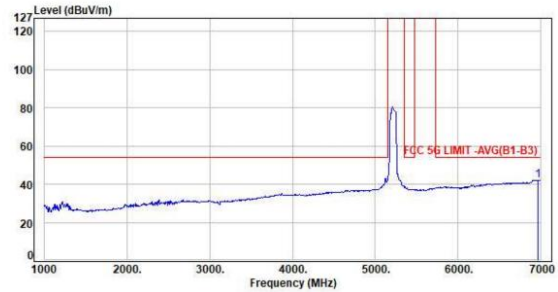

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6964.00	3.71	38.53	42.24	54.00	-11.76	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Peak

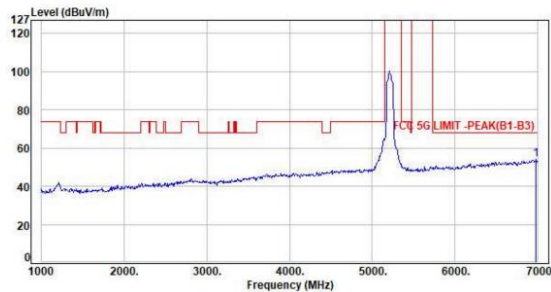

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	3.68	50.32	54.00	68.20	-14.20	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Average

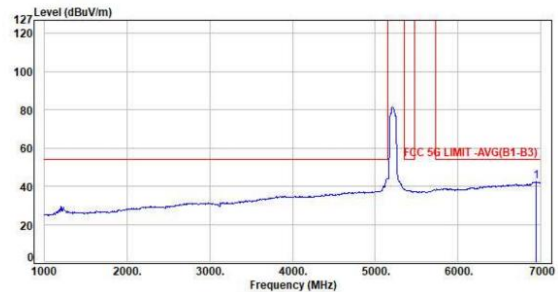


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6966.00	3.74	38.62	42.36	54.00	-11.64	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11a CH52 6Mbps
Pol : Vertical Detector : Peak

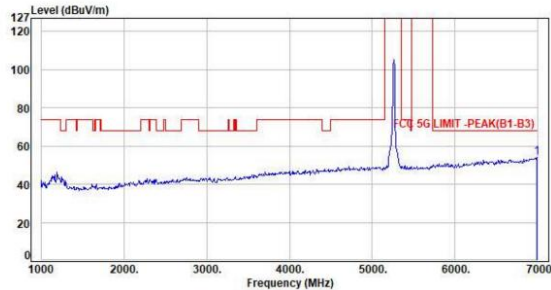

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	3.68	50.18	53.86	68.20	-14.34	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH52 6Mbps
Pol : Vertical Detector : Average

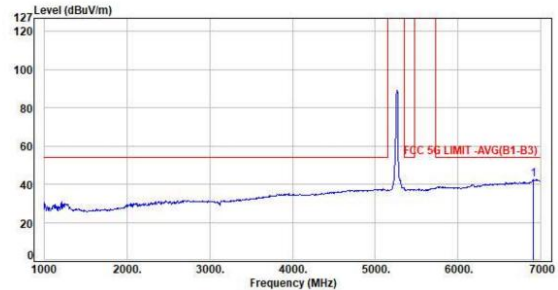

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6984.00	3.76	38.55	42.31	54.00	-11.69	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH52 6Mbps
Pol : Horizontal Detector : Peak

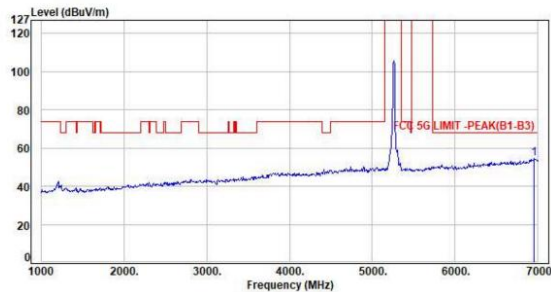

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	3.72	50.65	54.37	68.20	-13.83	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps
Pol : Horizontal Detector : Average

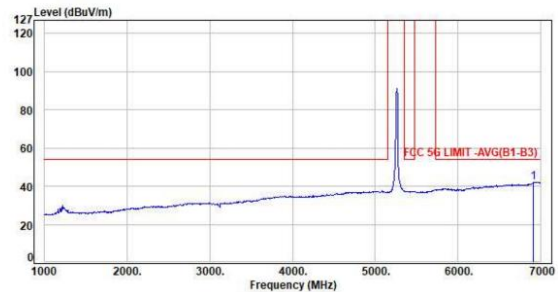


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6984.00	3.76	38.33	42.09	54.00	-11.91	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11a CH60 6Mbps
Pol : Vertical Detector : Peak

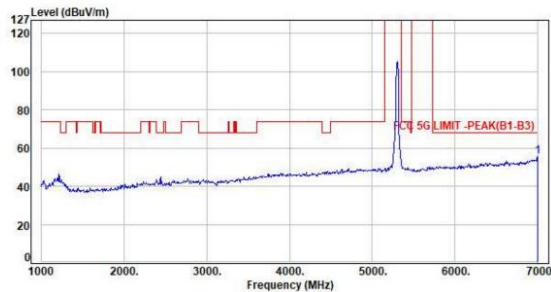

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	3.65	52.05	55.70	68.20	-12.50	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH60 6Mbps
Pol : Vertical Detector : Average

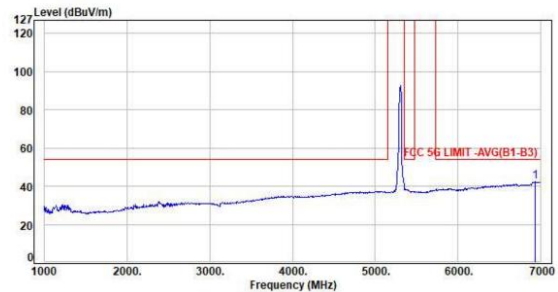

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	3.75	38.54	42.29	54.00	-11.71	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH60 6Mbps
Pol : Horizontal Detector : Peak

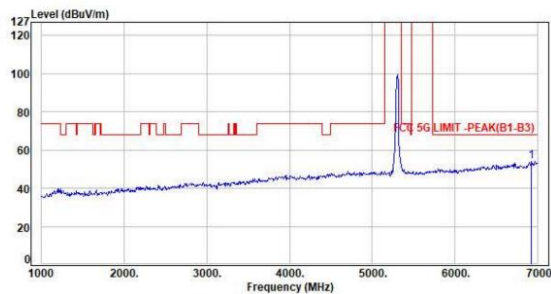

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6922.00	3.76	50.21	53.97	68.20	-14.23	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps
Pol : Horizontal Detector : Average

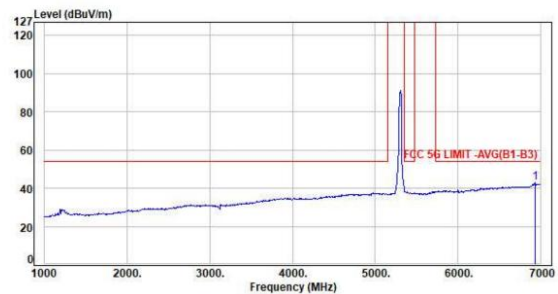

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	3.75	39.03	42.78	54.00	-11.22	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor