




Test Mode : 1TX 11a CH48 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

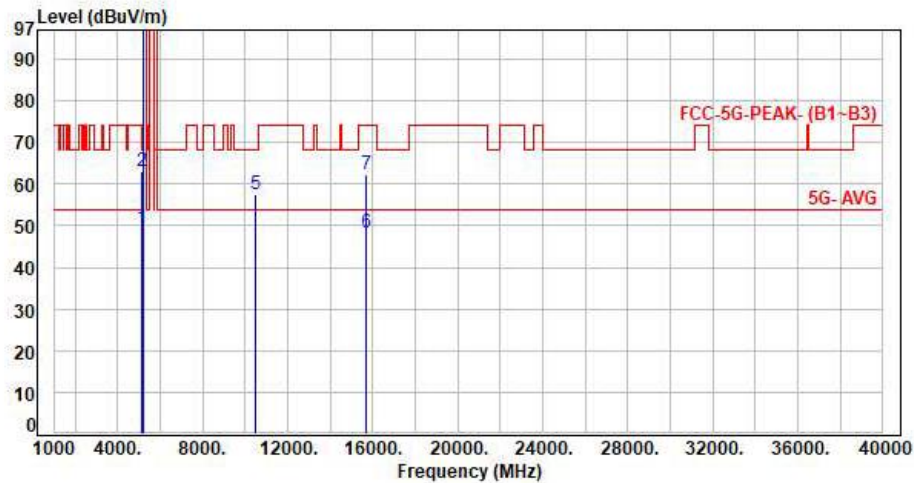

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	42.30	49.48	54.00	-4.52	Average	178	214	P
2	5150.00	7.18	55.73	62.91	74.00	-11.09	Peak	178	214	P
3	5240.00	7.32	89.35	96.67	200.00	-103.33	Average	178	214	P
4	5240.00	7.32	100.22	107.54	200.00	-92.46	Peak	178	214	P
5	10480.00	15.44	42.26	57.70	68.20	-10.50	Peak	100	184	P
6	15720.00	19.61	28.61	48.22	54.00	-5.78	Average	100	302	P
7	15720.00	19.61	42.66	62.27	74.00	-11.73	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

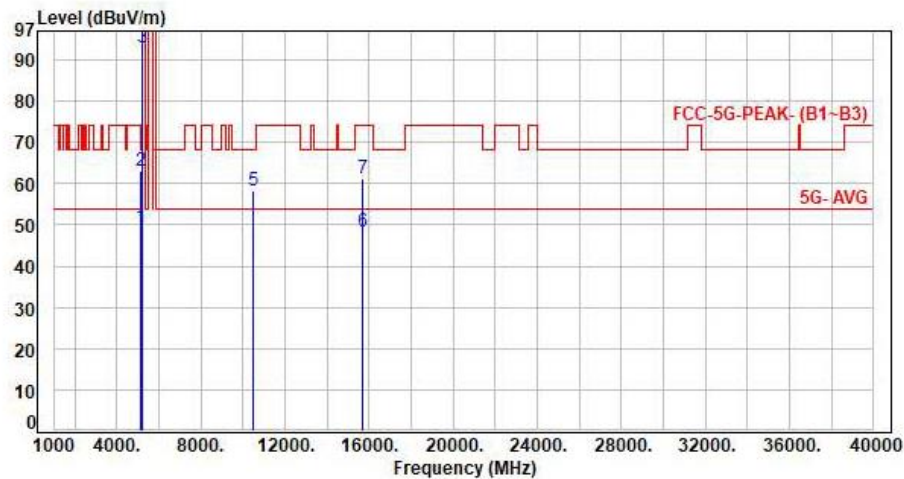

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	42.31	49.49	54.00	-4.51	Average	264	133	P
2	5150.00	7.18	56.03	63.21	74.00	-10.79	Peak	264	133	P
3	5240.00	7.32	85.48	92.80	200.00	-107.20	Average	264	133	P
4	5240.00	7.32	96.41	103.73	200.00	-96.27	Peak	264	133	P
5	10480.00	15.44	42.65	58.09	68.20	-10.11	Peak	100	15	P
6	15720.00	19.61	28.61	48.22	54.00	-5.78	Average	100	71	P
7	15720.00	19.61	41.69	61.30	74.00	-12.70	Peak	100	71	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT A / B2

Test Mode : 1TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

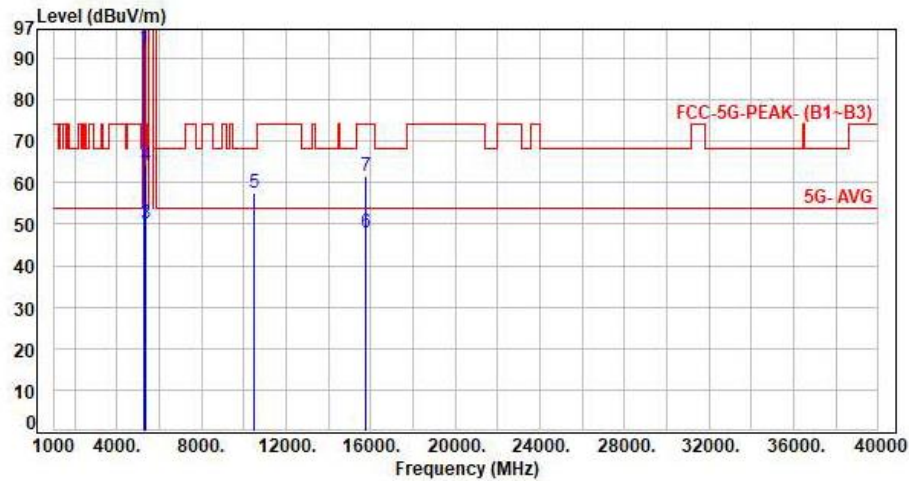

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	85.20	92.57	200.00	-107.43	Average	164	212	P
2	5260.00	7.37	95.94	103.31	200.00	-96.69	Peak	164	212	P
3	5350.00	7.67	42.62	50.29	54.00	-3.71	Average	164	212	P
4	5350.00	7.67	56.44	64.11	74.00	-9.89	Peak	164	212	P
5	10520.00	15.59	42.00	57.59	68.20	-10.61	Peak	100	184	P
6	15780.00	19.34	28.50	47.84	54.00	-6.16	Average	100	302	P
7	15780.00	19.34	42.24	61.58	74.00	-12.42	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

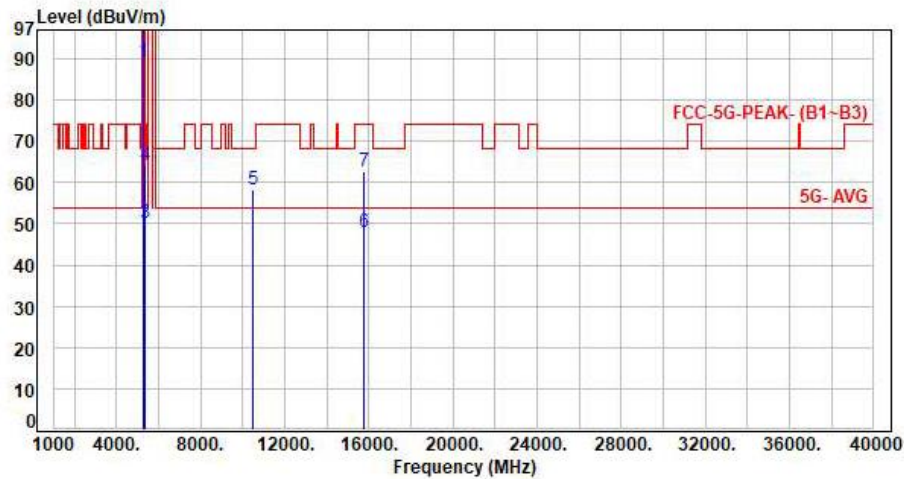

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	81.86	89.23	200.00	-110.77	Average	265	132	P
2	5260.00	7.37	92.34	99.71	200.00	-100.29	Peak	265	132	P
3	5350.00	7.67	42.57	50.24	54.00	-3.76	Average	265	132	P
4	5350.00	7.67	56.52	64.19	74.00	-9.81	Peak	265	132	P
5	10520.00	15.59	42.83	58.42	68.20	-9.78	Peak	100	11	P
6	15780.00	19.34	28.50	47.84	54.00	-6.16	Average	100	71	P
7	15780.00	19.34	43.35	62.69	74.00	-11.31	Peak	100	71	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

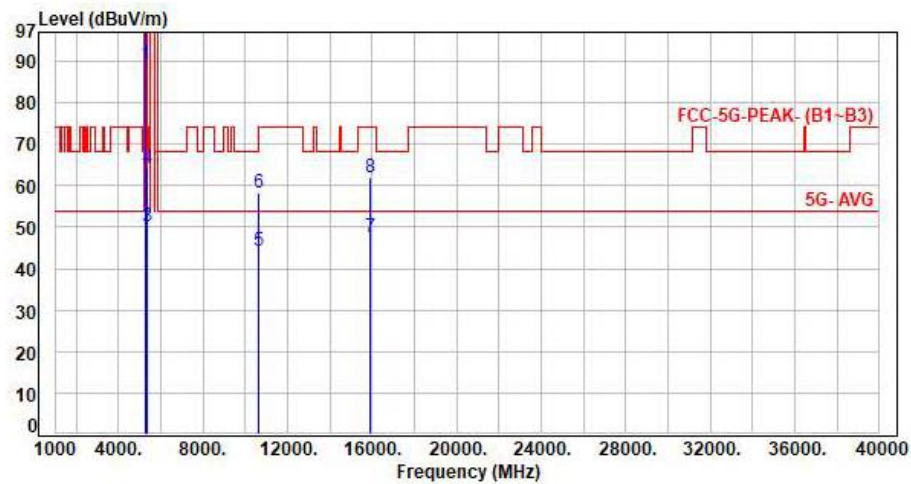

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	81.79	89.34	200.00	-110.66	Average	100	208	P
2	5300.00	7.55	92.72	100.27	200.00	-99.73	Peak	100	208	P
3	5350.00	7.67	42.54	50.21	54.00	-3.79	Average	100	208	P
4	5350.00	7.67	56.49	64.16	74.00	-9.84	Peak	100	208	P
5	10600.00	15.69	28.61	44.30	54.00	-9.70	Average	100	181	P
6	10600.00	15.69	42.75	58.44	74.00	-15.56	Peak	100	181	P
7	15900.00	19.12	28.48	47.60	54.00	-6.40	Average	100	305	P
8	15900.00	19.12	42.70	61.82	74.00	-12.18	Peak	100	305	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

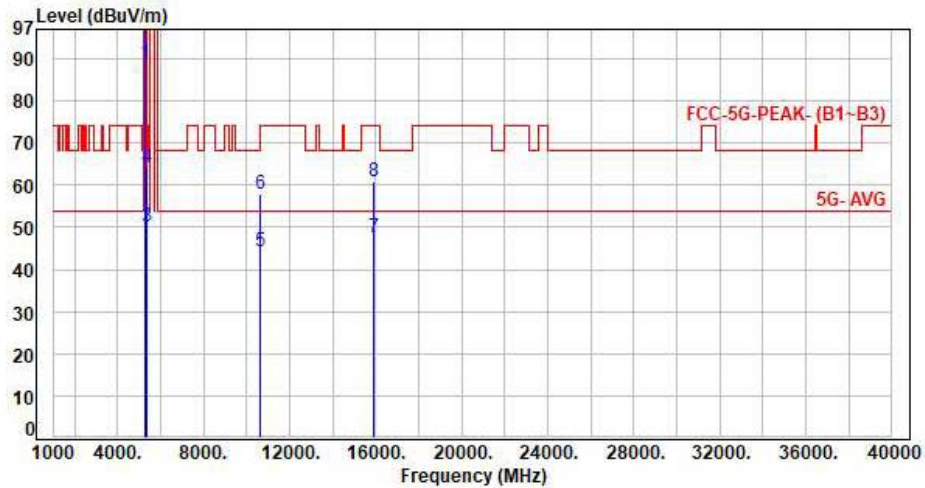

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	81.18	88.73	200.00	-111.27	Average	389	264	P
2	5300.00	7.55	91.85	99.40	200.00	-100.60	Peak	389	264	P
3	5350.00	7.67	42.57	50.24	54.00	-3.76	Average	389	264	P
4	5350.00	7.67	56.38	64.05	74.00	-9.95	Peak	389	264	P
5	10600.00	15.69	28.59	44.28	54.00	-9.72	Average	100	10	P
6	10600.00	15.69	42.07	57.76	74.00	-16.24	Peak	100	10	P
7	15900.00	19.12	28.46	47.58	54.00	-6.42	Average	100	71	P
8	15900.00	19.12	41.90	61.02	74.00	-12.98	Peak	100	71	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

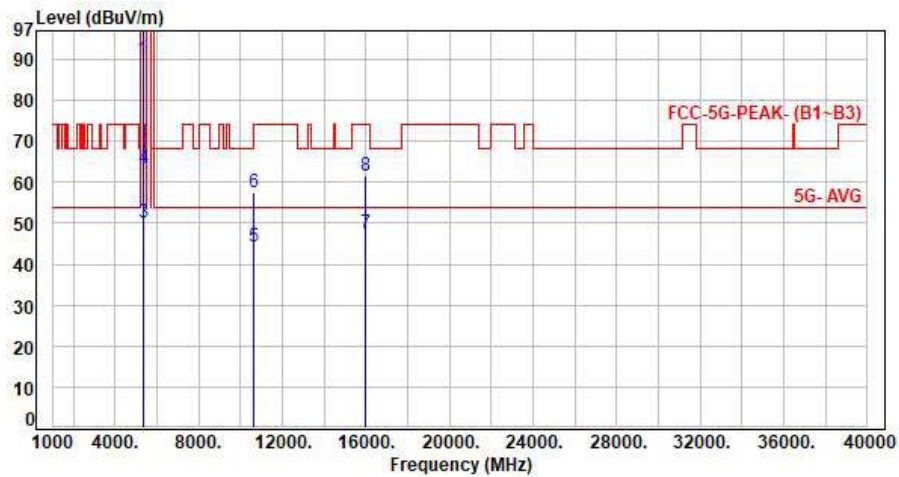

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	82.40	90.00	200.00	-110.00	Average	180	209	P
2	5320.00	7.60	92.98	100.58	200.00	-99.42	Peak	180	209	P
3	5350.00	7.67	42.61	50.28	54.00	-3.72	Average	180	209	P
4	5350.00	7.67	55.92	63.59	74.00	-10.41	Peak	180	209	P
5	10640.00	15.73	28.64	44.37	54.00	-9.63	Average	100	179	P
6	10640.00	15.73	41.89	57.62	74.00	-16.38	Peak	100	179	P
7	15960.00	19.05	28.59	47.64	54.00	-6.36	Average	100	308	P
8	15960.00	19.05	42.61	61.66	74.00	-12.34	Peak	100	308	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

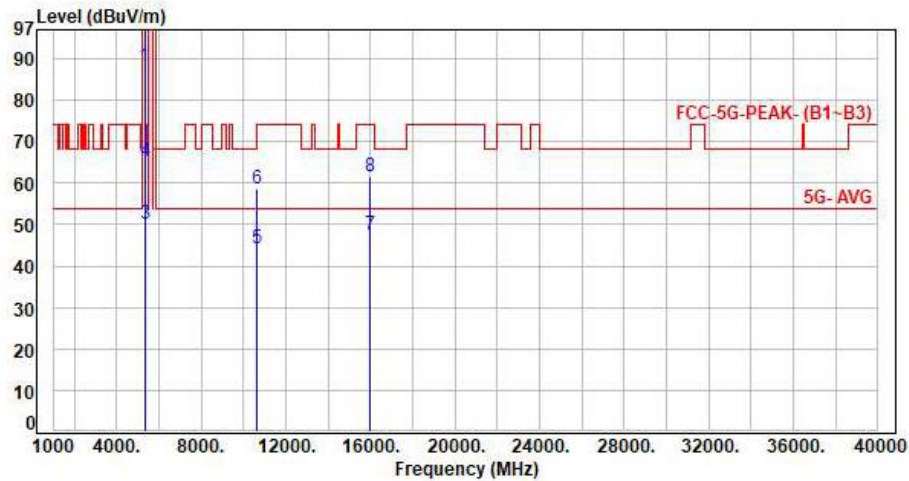

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	80.53	88.13	200.00	-111.87	Average	262	133	P
2	5320.00	7.60	91.28	98.88	200.00	-101.12	Peak	262	133	P
3	5350.00	7.67	42.58	50.25	54.00	-3.75	Average	262	133	P
4	5350.00	7.67	57.66	65.33	74.00	-8.67	Peak	262	133	P
5	10640.00	15.73	28.56	44.29	54.00	-9.71	Average	100	14	P
6	10640.00	15.73	42.82	58.55	74.00	-15.45	Peak	100	14	P
7	15960.00	19.05	28.60	47.65	54.00	-6.35	Average	100	74	P
8	15960.00	19.05	42.36	61.41	74.00	-12.59	Peak	100	74	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT A / B3

Test Mode : 1TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

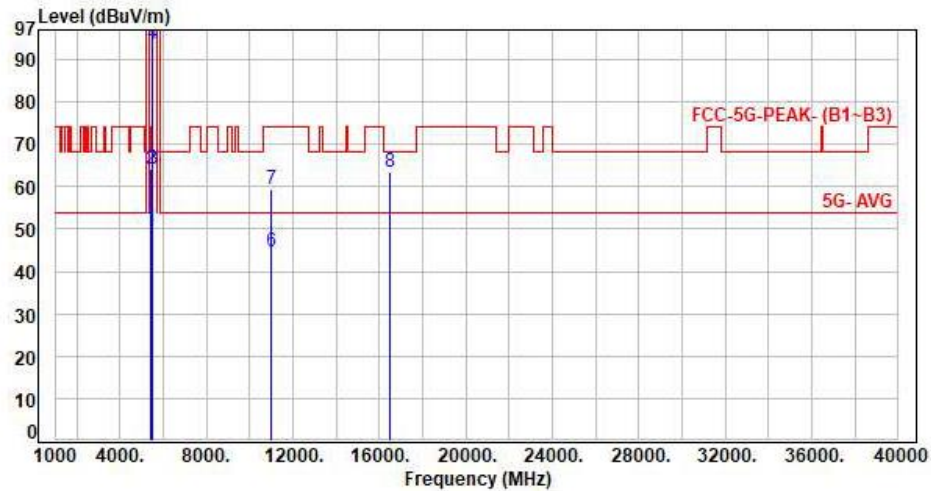

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.51	50.23	54.00	-3.77	Average	235	199	P
2	5460.00	7.72	56.37	64.09	74.00	-9.91	Peak	235	199	P
3	5470.00	7.72	56.29	64.01	68.20	-4.19	Peak	235	199	P
4	5500.00	7.73	85.79	93.52	200.00	-106.48	Average	235	199	P
5	5500.00	7.73	96.32	104.05	200.00	-95.95	Peak	235	199	P
6	11000.00	15.79	28.77	44.56	54.00	-9.44	Average	100	182	P
7	11000.00	15.79	43.56	59.35	74.00	-14.65	Peak	100	182	P
8	16500.00	20.93	42.60	63.53	68.20	-4.67	Peak	100	301	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

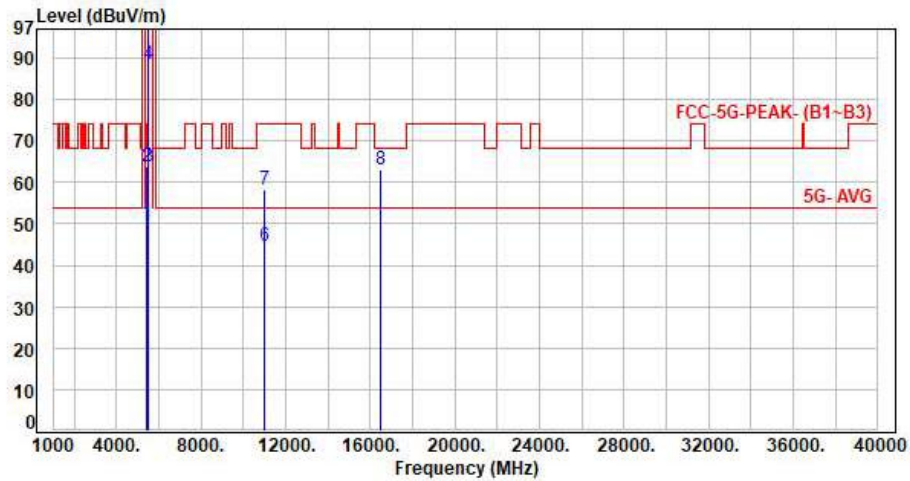


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.53	50.25	54.00	-3.75	Average	100	126	P
2	5460.00	7.72	55.90	63.62	74.00	-10.38	Peak	100	126	P
3	5470.00	7.72	56.06	63.78	68.20	-4.42	Peak	100	126	P
4	5500.00	7.73	80.92	88.65	200.00	-111.35	Average	100	126	P
5	5500.00	7.73	91.46	99.19	200.00	-100.81	Peak	100	126	P
6	11000.00	15.79	28.66	44.45	54.00	-9.55	Average	100	15	P
7	11000.00	15.79	42.60	58.39	74.00	-15.61	Peak	100	15	P
8	16500.00	20.93	42.11	63.04	68.20	-5.16	Peak	100	77	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

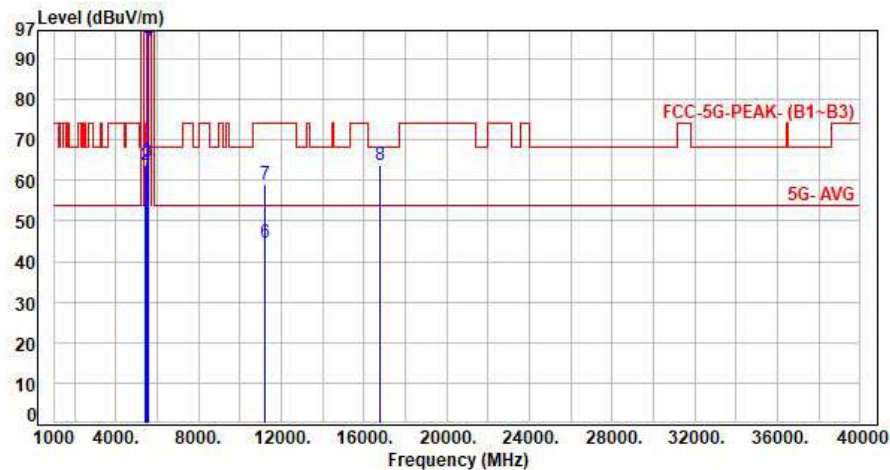

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.60	50.32	54.00	-3.68	Average	222	196	P
2	5460.00	7.72	56.13	63.85	74.00	-10.15	Peak	222	196	P
3	5470.00	7.72	56.92	64.64	68.20	-3.56	Peak	222	196	P
4	5600.00	7.47	87.08	94.55	200.00	-105.45	Average	222	196	P
5	5600.00	7.47	97.87	105.34	200.00	-94.66	Peak	222	196	P
6	11200.00	16.18	28.62	44.80	54.00	-9.20	Average	100	179	P
7	11200.00	16.18	42.65	58.83	74.00	-15.17	Peak	100	179	P
8	16800.00	22.69	41.03	63.72	68.20	-4.48	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

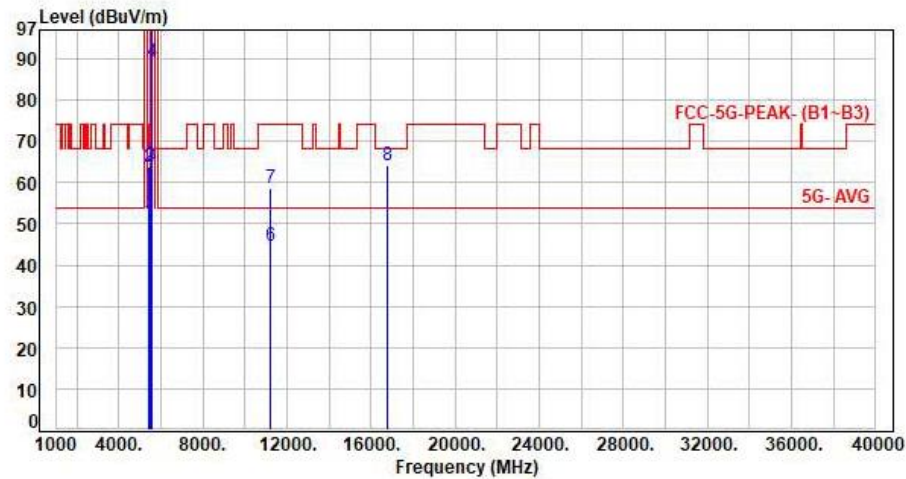

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.67	50.39	54.00	-3.61	Average	104	153	P
2	5460.00	7.72	56.13	63.85	74.00	-10.15	Peak	104	153	P
3	5470.00	7.72	56.35	64.07	68.20	-4.13	Peak	104	153	P
4	5600.00	7.47	81.71	89.18	200.00	-110.82	Average	104	153	P
5	5600.00	7.47	92.60	100.07	200.00	-99.93	Peak	104	153	P
6	11200.00	16.18	28.60	44.78	54.00	-9.22	Average	100	13	P
7	11200.00	16.18	42.39	58.57	74.00	-15.43	Peak	100	13	P
8	16800.00	22.69	41.48	64.17	68.20	-4.03	Peak	100	72	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

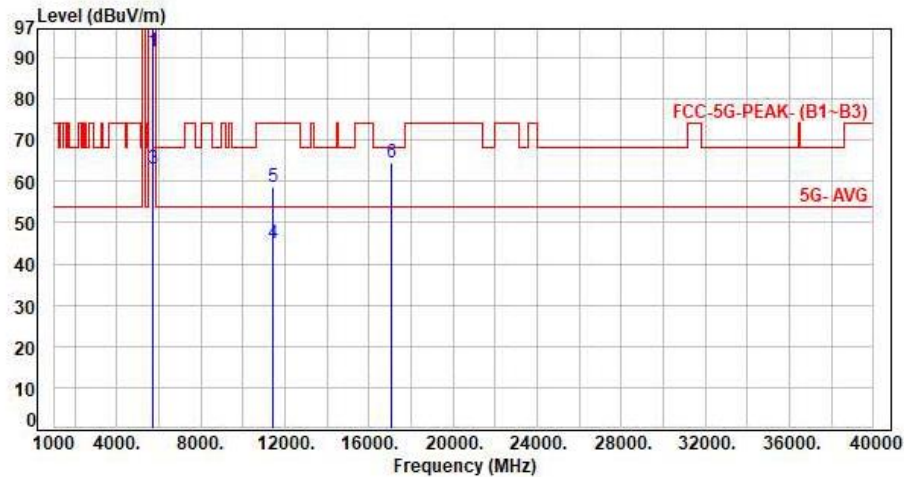

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	84.17	91.58	200.00	-108.42	Average	222	195	P
2	5700.00	7.41	94.83	102.24	200.00	-97.76	Peak	222	195	P
3	5725.00	7.39	55.81	63.20	68.20	-5.00	Peak	222	195	P
4	11400.00	16.59	28.50	45.09	54.00	-8.91	Average	100	182	P
5	11400.00	16.59	42.10	58.69	74.00	-15.31	Peak	100	182	P
6	17100.00	23.97	40.47	64.44	68.20	-3.76	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

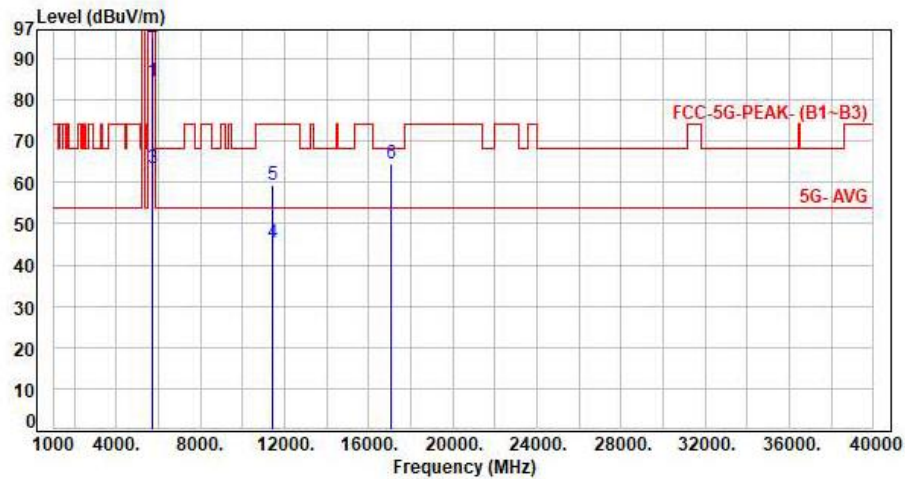

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	76.94	84.35	200.00	-115.65	Average	383	98	P
2	5700.00	7.41	87.87	95.28	200.00	-104.72	Peak	383	98	P
3	5725.00	7.39	56.02	63.41	68.20	-4.79	Peak	383	98	P
4	11400.00	16.59	28.65	45.24	54.00	-8.76	Average	100	12	P
5	11400.00	16.59	42.61	59.20	74.00	-14.80	Peak	100	12	P
6	17100.00	23.97	40.53	64.50	68.20	-3.70	Peak	100	74	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT A / B4

Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

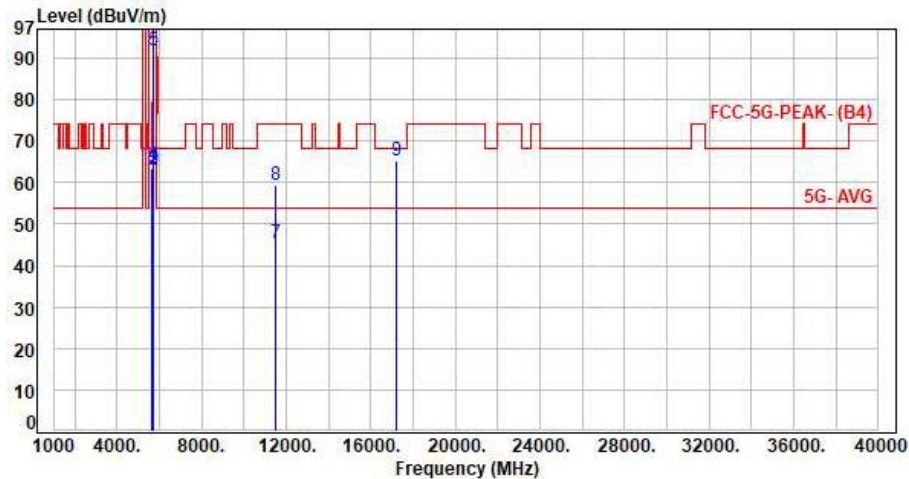

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.77	63.31	68.20	-4.89	Peak	223	154	P
2	5700.00	7.41	55.58	62.99	105.20	-42.21	Peak	223	154	P
3	5720.00	7.39	56.07	63.46	110.80	-47.34	Peak	223	154	P
4	5725.00	7.39	56.79	64.18	122.20	-58.02	Peak	223	154	P
5	5745.00	7.38	84.57	91.95	200.00	-108.05	Average	223	154	P
6	5745.00	7.38	95.51	102.89	200.00	-97.11	Peak	223	154	P
7	11490.00	16.75	28.79	45.54	54.00	-8.46	Average	100	182	P
8	11490.00	16.75	42.45	59.20	74.00	-14.80	Peak	100	182	P
9	17235.00	24.83	40.47	65.30	68.20	-2.90	Peak	100	300	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

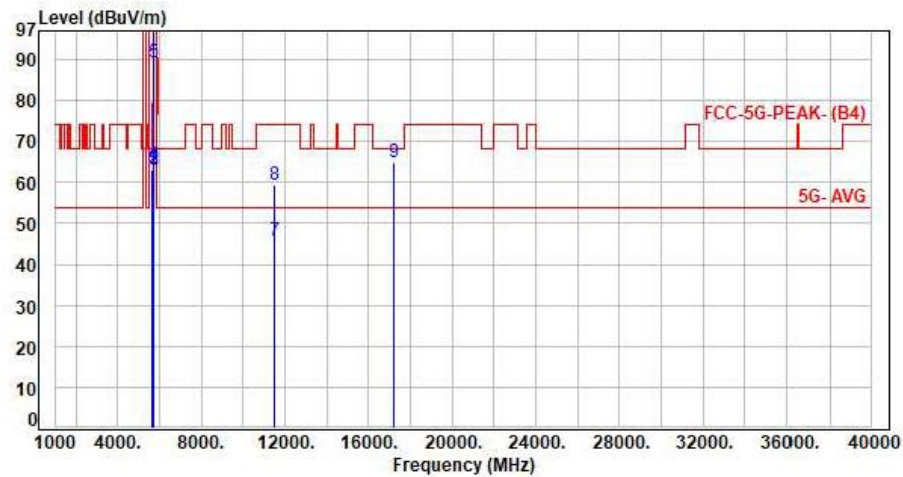

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.50	63.04	68.20	-5.16	Peak	390	114	P
2	5700.00	7.41	56.16	63.57	105.20	-41.63	Peak	390	114	P
3	5720.00	7.39	55.50	62.89	110.80	-47.91	Peak	390	114	P
4	5725.00	7.39	56.76	64.15	122.20	-58.05	Peak	390	114	P
5	5745.00	7.38	81.72	89.10	200.00	-110.90	Average	390	114	P
6	5745.00	7.38	92.32	99.70	200.00	-100.30	Peak	390	114	P
7	11490.00	16.75	28.85	45.60	54.00	-8.40	Average	100	14	P
8	11490.00	16.75	42.74	59.49	74.00	-14.51	Peak	100	14	P
9	17235.00	24.83	40.07	64.90	68.20	-3.30	Peak	100	72	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

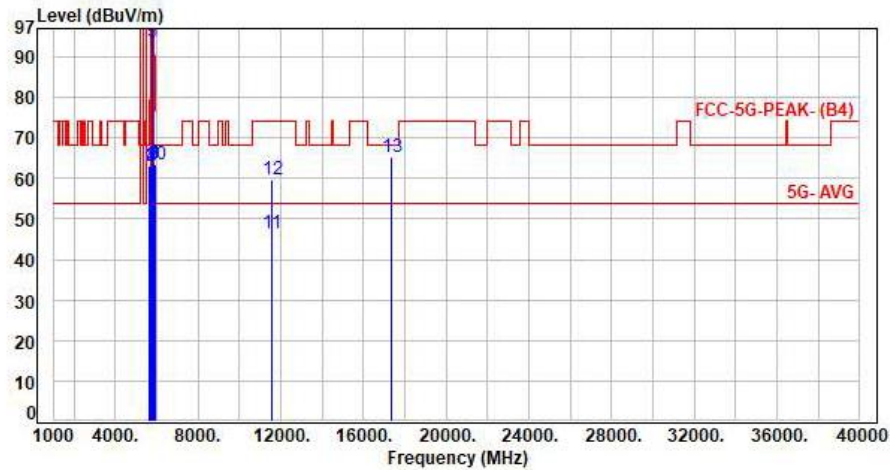

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.67	63.21	68.20	-4.99	Peak	100	150	P
2	5700.00	7.41	55.50	62.91	105.20	-42.29	Peak	100	150	P
3	5720.00	7.39	55.80	63.19	110.80	-47.61	Peak	100	150	P
4	5725.00	7.39	55.56	62.95	122.20	-59.25	Peak	100	150	P
5	5785.00	7.34	86.41	93.75	200.00	-106.25	Average	100	150	P
6	5785.00	7.34	96.97	104.31	200.00	-95.69	Peak	100	150	P
7	5850.00	7.30	55.82	63.12	122.20	-59.08	Peak	100	150	P
8	5855.00	7.32	56.58	63.90	110.80	-46.90	Peak	100	150	P
9	5875.00	7.39	56.03	63.42	105.20	-41.78	Peak	100	150	P
10	5925.00	7.51	56.01	63.52	68.20	-4.68	Peak	100	150	P
11	11570.00	17.65	28.84	46.49	54.00	-7.51	Average	100	183	P
12	11570.00	17.65	42.26	59.91	74.00	-14.09	Peak	100	183	P
13	17355.00	25.69	39.43	65.12	68.20	-3.08	Peak	100	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

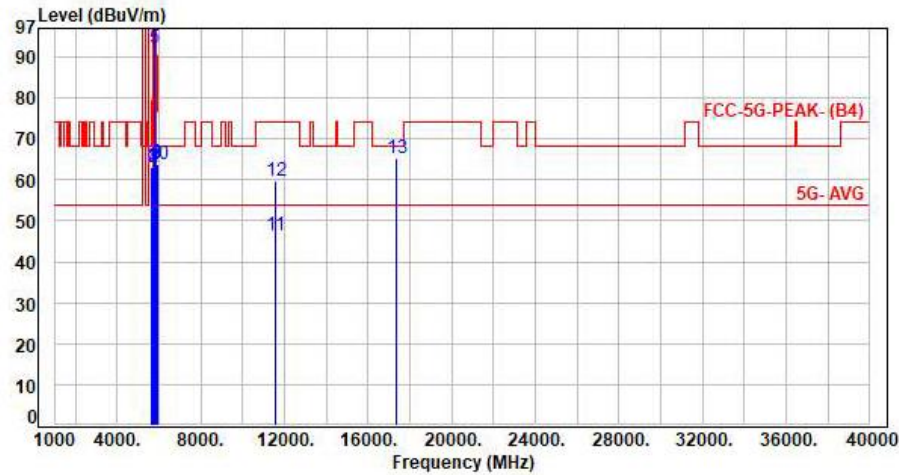

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.57	63.11	68.20	-5.09	Peak	375	234	P
2	5700.00	7.41	55.59	63.00	105.20	-42.20	Peak	375	234	P
3	5720.00	7.39	55.71	63.10	110.80	-47.70	Peak	375	234	P
4	5725.00	7.39	55.76	63.15	122.20	-59.05	Peak	375	234	P
5	5785.00	7.34	84.76	92.10	200.00	-107.90	Average	375	234	P
6	5785.00	7.34	95.46	102.80	200.00	-97.20	Peak	375	234	P
7	5850.00	7.30	55.67	62.97	122.20	-59.23	Peak	375	234	P
8	5855.00	7.32	56.86	64.18	110.80	-46.62	Peak	375	234	P
9	5875.00	7.39	56.43	63.82	105.20	-41.38	Peak	375	234	P
10	5925.00	7.51	56.12	63.63	68.20	-4.57	Peak	375	234	P
11	11570.00	17.65	28.76	46.41	54.00	-7.59	Average	100	15	P
12	11570.00	17.65	42.23	59.88	74.00	-14.12	Peak	100	15	P
13	17355.00	25.69	39.61	65.30	68.20	-2.90	Peak	100	73	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

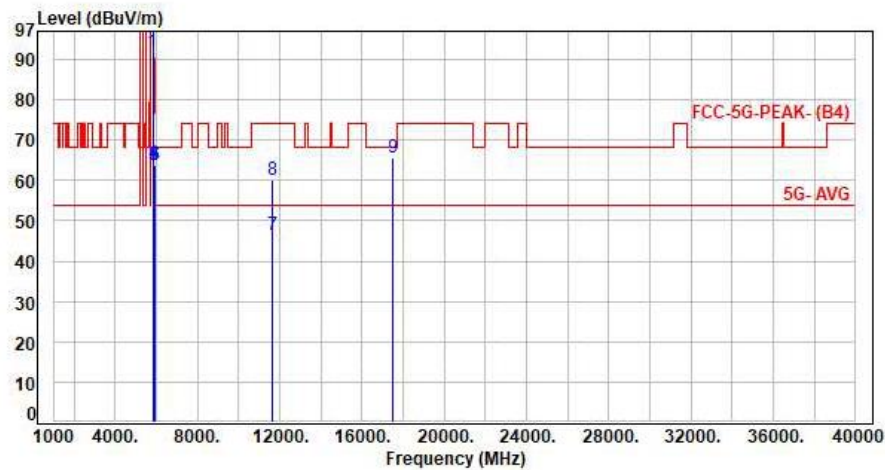

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	84.35	91.67	200.00	-108.33	Average	205	185	P
2	5825.00	7.32	94.58	101.90	200.00	-98.10	Peak	205	185	P
3	5850.00	7.30	56.59	63.89	122.20	-58.31	Peak	205	185	P
4	5855.00	7.32	56.82	64.14	110.80	-46.66	Peak	205	185	P
5	5875.00	7.39	56.43	63.82	105.20	-41.38	Peak	205	185	P
6	5925.00	7.51	56.13	63.64	68.20	-4.56	Peak	205	185	P
7	11650.00	17.74	28.62	46.36	54.00	-7.64	Average	100	186	P
8	11650.00	17.74	42.41	60.15	74.00	-13.85	Peak	100	186	P
9	17475.00	26.42	39.09	65.51	68.20	-2.69	Peak	100	304	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

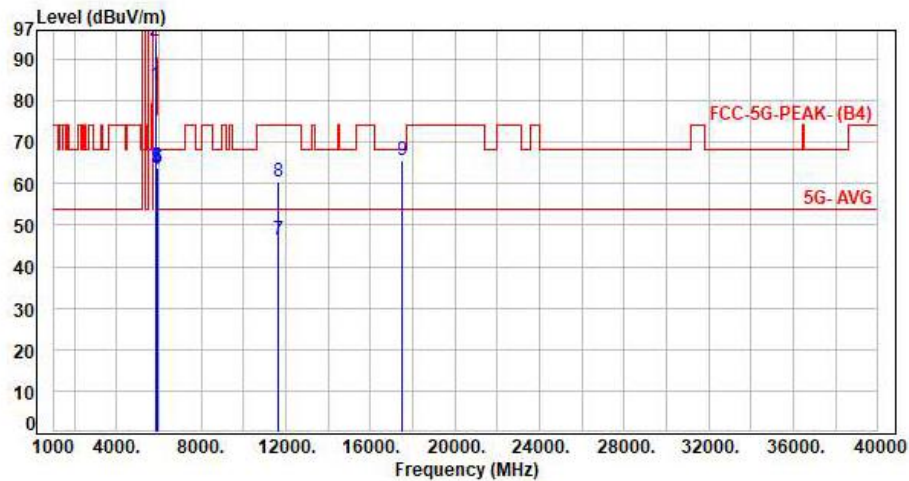

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	76.41	83.73	200.00	-116.27	Average	161	98	P
2	5825.00	7.32	87.21	94.53	200.00	-105.47	Peak	161	98	P
3	5850.00	7.30	56.57	63.87	122.20	-58.33	Peak	161	98	P
4	5855.00	7.32	56.19	63.51	110.80	-47.29	Peak	161	98	P
5	5875.00	7.39	56.73	64.12	105.20	-41.08	Peak	161	98	P
6	5925.00	7.51	56.13	63.64	68.20	-4.56	Peak	161	98	P
7	11650.00	17.74	28.62	46.36	54.00	-7.64	Average	100	12	P
8	11650.00	17.74	42.87	60.61	74.00	-13.39	Peak	100	12	P
9	17475.00	26.42	39.13	65.55	68.20	-2.65	Peak	100	74	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

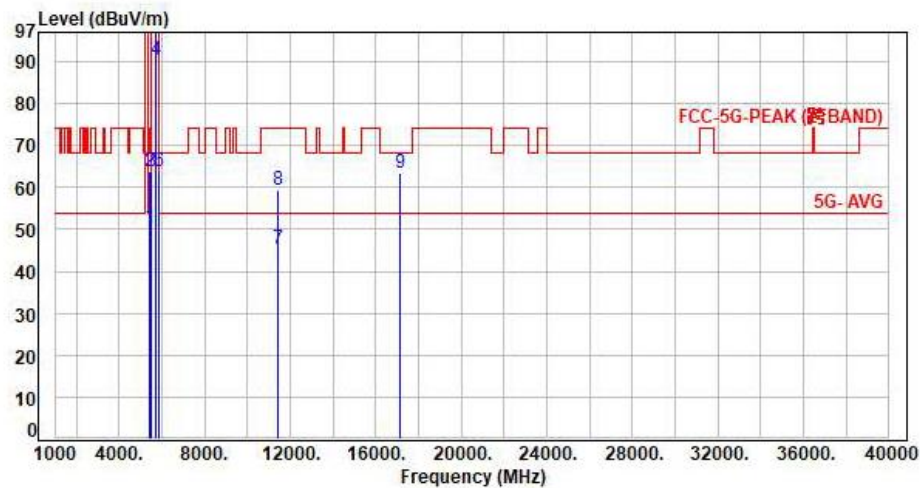

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.64	50.36	54.00	-3.64	Average	100	196	P
2	5460.00	7.72	56.01	63.73	74.00	-10.27	Peak	100	196	P
3	5470.00	7.72	56.08	63.80	68.20	-4.40	Peak	100	196	P
4	5720.00	7.39	83.08	90.47	200.00	-109.53	Average	100	196	P
5	5720.00	7.39	93.88	101.27	200.00	-98.73	Peak	100	196	P
6	5850.00	7.30	56.41	63.71	68.20	-4.49	Peak	100	196	P
7	11440.00	16.63	28.58	45.21	54.00	-8.79	Average	100	182	P
8	11440.00	16.63	42.77	59.40	74.00	-14.60	Peak	100	182	P
9	17160.00	24.42	38.99	63.41	68.20	-4.79	Peak	100	300	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

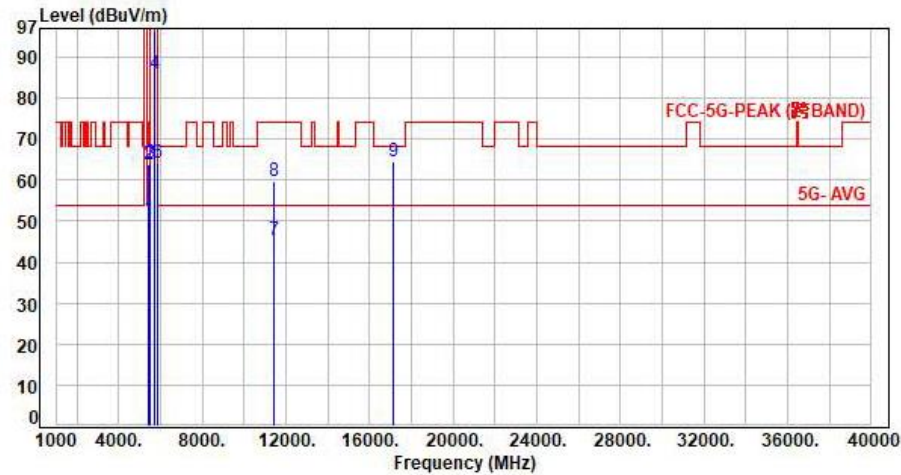

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.67	50.39	54.00	-3.61	Average	334	116	P
2	5460.00	7.72	56.17	63.89	74.00	-10.11	Peak	334	116	P
3	5470.00	7.72	56.35	64.07	68.20	-4.13	Peak	334	116	P
4	5720.00	7.39	78.42	85.81	200.00	-114.19	Average	334	116	P
5	5720.00	7.39	88.75	96.14	200.00	-103.86	Peak	334	116	P
6	5850.00	7.30	56.70	64.00	68.20	-4.20	Peak	334	116	P
7	11440.00	16.63	28.56	45.19	54.00	-8.81	Average	100	14	P
8	11440.00	16.63	43.03	59.66	74.00	-14.34	Peak	100	14	P
9	17160.00	24.42	40.19	64.61	68.20	-3.59	Peak	100	75	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT B / B1

Test Mode : 1TX 11a CH36 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

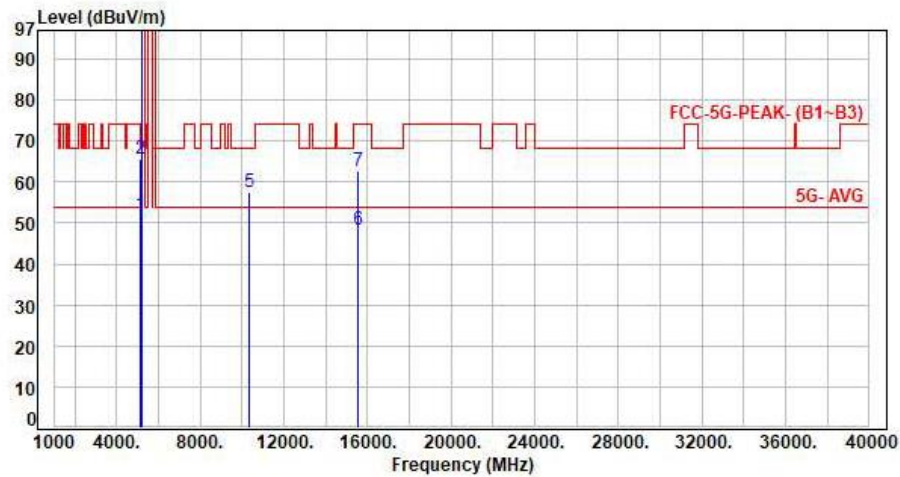

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	44.90	52.08	54.00	-1.92	Average	100	210	P
2	5150.00	7.18	58.42	65.60	74.00	-8.40	Peak	100	210	P
3	5180.00	7.25	88.79	96.04	200.00	-103.96	Average	100	210	P
4	5180.00	7.25	99.77	107.02	200.00	-92.98	Peak	100	210	P
5	10360.00	15.21	42.49	57.70	68.20	-10.50	Peak	100	174	P
6	15540.00	19.80	28.69	48.49	54.00	-5.51	Average	100	261	P
7	15540.00	19.80	42.96	62.76	74.00	-11.24	Peak	100	261	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH36 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

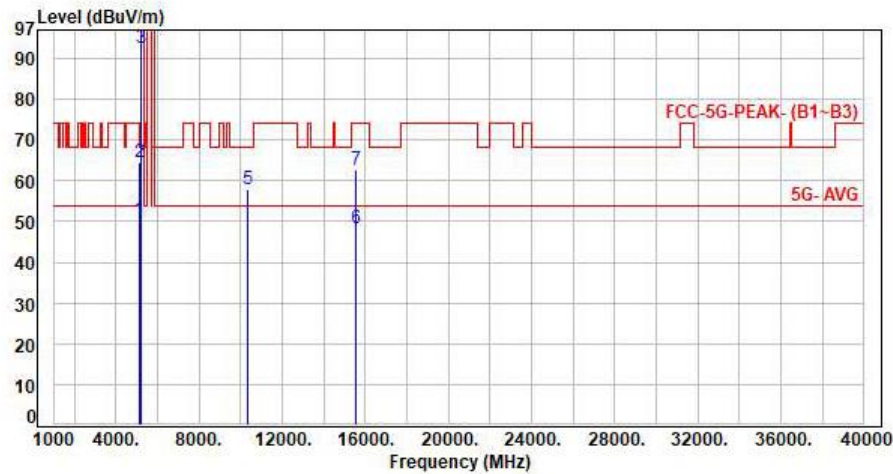

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	43.34	50.52	54.00	-3.48	Average	100	11	P
2	5150.00	7.18	57.18	64.36	74.00	-9.64	Peak	100	11	P
3	5180.00	7.25	85.23	92.48	200.00	-107.52	Average	100	11	P
4	5180.00	7.25	96.05	103.30	200.00	-96.70	Peak	100	11	P
5	10360.00	15.21	42.75	57.96	68.20	-10.24	Peak	100	94	P
6	15540.00	19.80	28.66	48.46	54.00	-5.54	Average	100	135	P
7	15540.00	19.80	42.72	62.52	74.00	-11.48	Peak	100	135	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

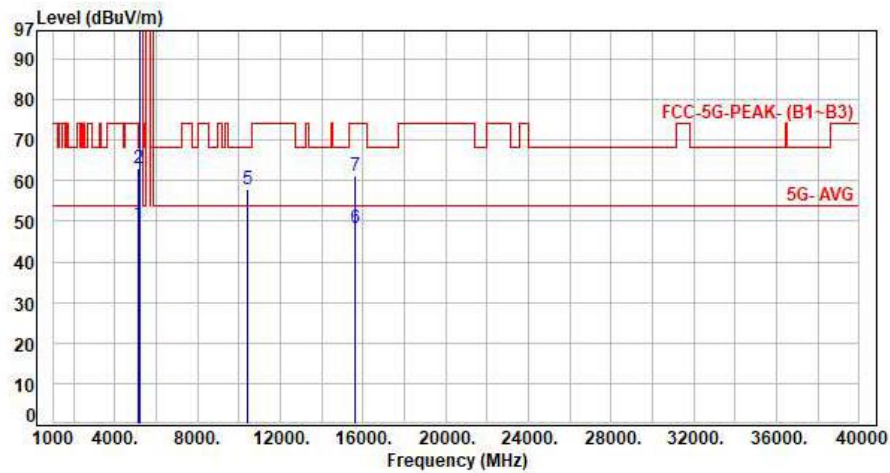

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	42.15	49.33	54.00	-4.67	Average	183	173	P
2	5150.00	7.18	55.88	63.06	74.00	-10.94	Peak	183	173	P
3	5200.00	7.30	89.47	96.77	200.00	-103.23	Average	183	173	P
4	5200.00	7.30	100.21	107.51	200.00	-92.49	Peak	183	173	P
5	10400.00	15.16	42.57	57.73	68.20	-10.47	Peak	100	170	P
6	15600.00	19.45	28.69	48.14	54.00	-5.86	Average	100	265	P
7	15600.00	19.45	41.80	61.25	74.00	-12.75	Peak	100	265	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

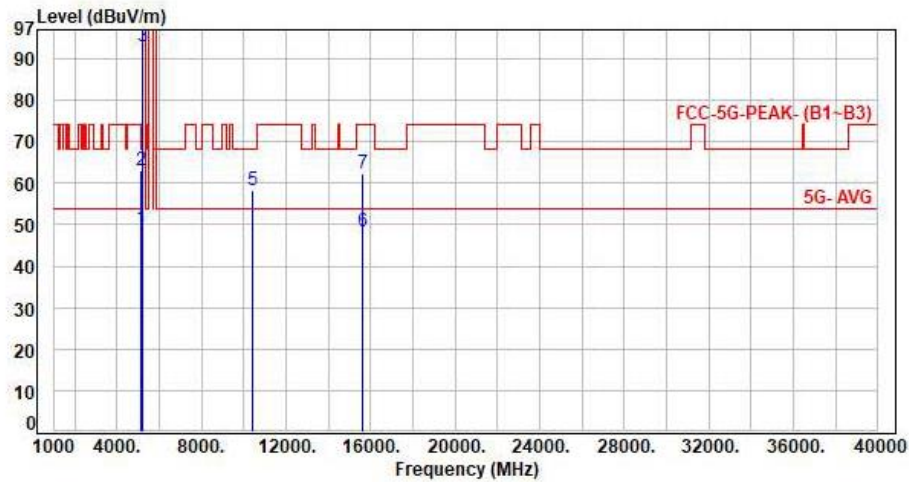

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	41.73	48.91	54.00	-5.09	Average	100	18	P
2	5150.00	7.18	55.93	63.11	74.00	-10.89	Peak	100	18	P
3	5200.00	7.30	85.57	92.87	200.00	-107.13	Average	100	18	P
4	5200.00	7.30	96.08	103.38	200.00	-96.62	Peak	100	18	P
5	10400.00	15.16	43.06	58.22	68.20	-9.98	Peak	100	94	P
6	15600.00	19.45	28.70	48.15	54.00	-5.85	Average	100	132	P
7	15600.00	19.45	42.71	62.16	74.00	-11.84	Peak	100	132	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

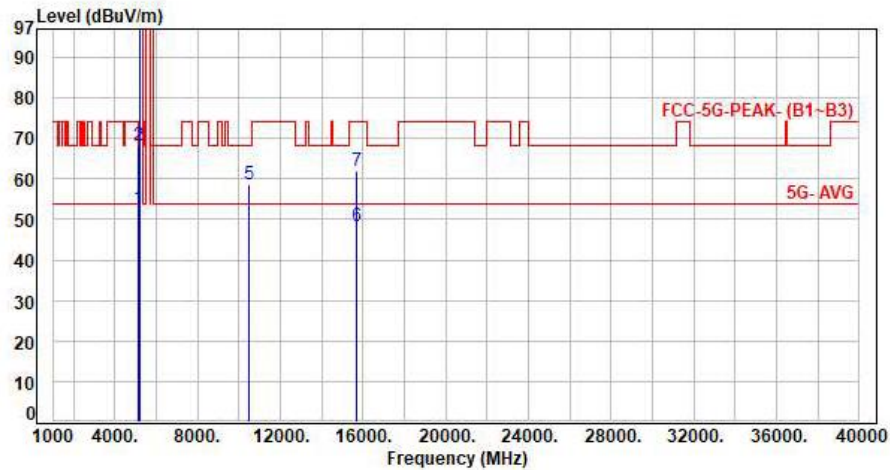

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	45.41	52.59	54.00	-1.41	Average	118	193	P
2	5150.00	7.18	61.17	68.35	74.00	-5.65	Peak	118	193	P
3	5240.00	7.32	92.35	99.67	200.00	-100.33	Average	118	193	P
4	5240.00	7.32	102.57	109.89	200.00	-90.11	Peak	118	193	P
5	10480.00	15.44	43.29	58.73	68.20	-9.47	Peak	100	174	P
6	15720.00	19.61	28.66	48.27	54.00	-5.73	Average	100	262	P
7	15720.00	19.61	42.22	61.83	74.00	-12.17	Peak	100	262	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

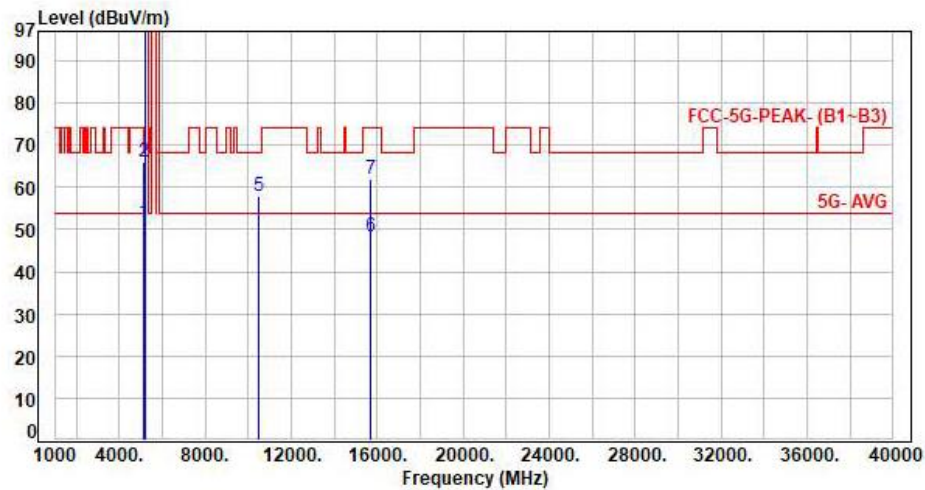

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	44.37	51.55	54.00	-2.45	Average	108	352	P
2	5150.00	7.18	58.80	65.98	74.00	-8.02	Peak	108	352	P
3	5240.00	7.32	88.51	95.83	200.00	-104.17	Average	108	352	P
4	5240.00	7.32	98.78	106.10	200.00	-93.90	Peak	108	352	P
5	10480.00	15.44	42.56	58.00	68.20	-10.20	Peak	100	94	P
6	15720.00	19.61	28.64	48.25	54.00	-5.75	Average	100	135	P
7	15720.00	19.61	42.36	61.97	74.00	-12.03	Peak	100	135	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT B / B2

Test Mode : 1TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

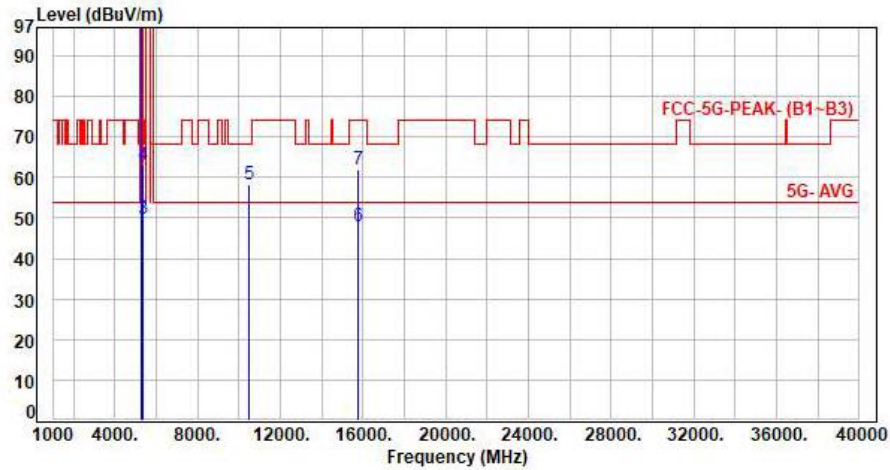

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	88.22	95.59	200.00	-104.41	Average	105	191	P
2	5260.00	7.37	98.81	106.18	200.00	-93.82	Peak	105	191	P
3	5350.00	7.67	41.96	49.63	54.00	-4.37	Average	105	191	P
4	5350.00	7.67	55.58	63.25	74.00	-10.75	Peak	105	191	P
5	10520.00	15.59	42.77	58.36	68.20	-9.84	Peak	100	176	P
6	15780.00	19.34	28.67	48.01	54.00	-5.99	Average	100	262	P
7	15780.00	19.34	42.57	61.91	74.00	-12.09	Peak	100	262	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

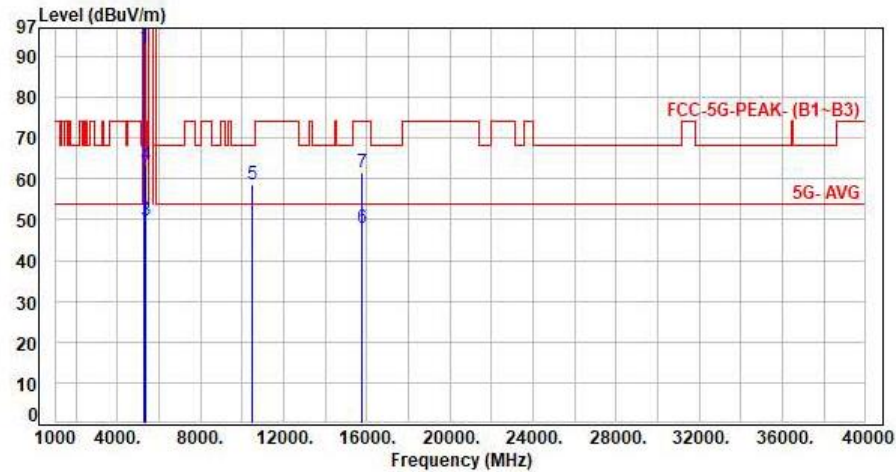

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	84.77	92.14	200.00	-107.86	Average	100	358	P
2	5260.00	7.37	95.70	103.07	200.00	-96.93	Peak	100	358	P
3	5350.00	7.67	42.01	49.68	54.00	-4.32	Average	100	358	P
4	5350.00	7.67	55.60	63.27	74.00	-10.73	Peak	100	358	P
5	10520.00	15.59	42.92	58.51	68.20	-9.69	Peak	100	90	P
6	15780.00	19.34	28.62	47.96	54.00	-6.04	Average	100	129	P
7	15780.00	19.34	42.31	61.65	74.00	-12.35	Peak	100	129	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

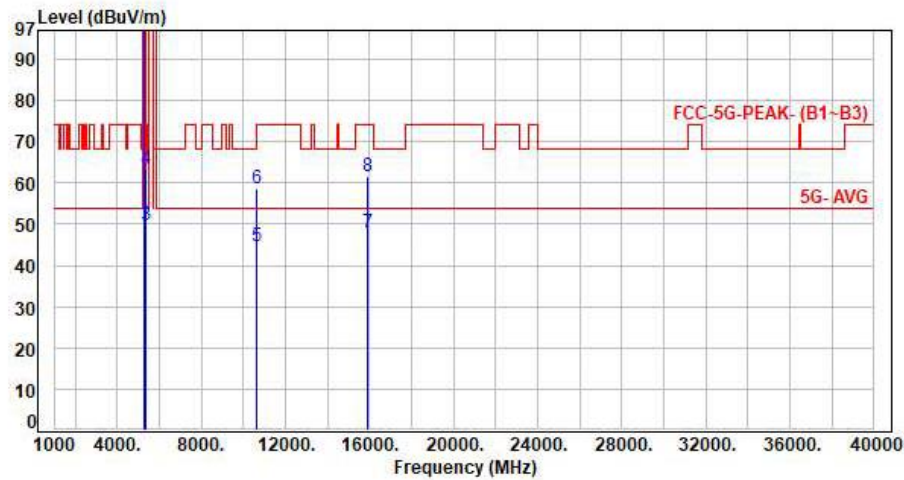

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	88.94	96.49	200.00	-103.51	Average	110	192	P
2	5300.00	7.55	99.53	107.08	200.00	-92.92	Peak	110	192	P
3	5350.00	7.67	42.07	49.74	54.00	-4.26	Average	110	192	P
4	5350.00	7.67	55.64	63.31	74.00	-10.69	Peak	110	192	P
5	10600.00	15.69	28.77	44.46	54.00	-9.54	Average	100	174	P
6	10600.00	15.69	42.90	58.59	74.00	-15.41	Peak	100	174	P
7	15900.00	19.12	28.68	47.80	54.00	-6.20	Average	100	268	P
8	15900.00	19.12	42.36	61.48	74.00	-12.52	Peak	100	268	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

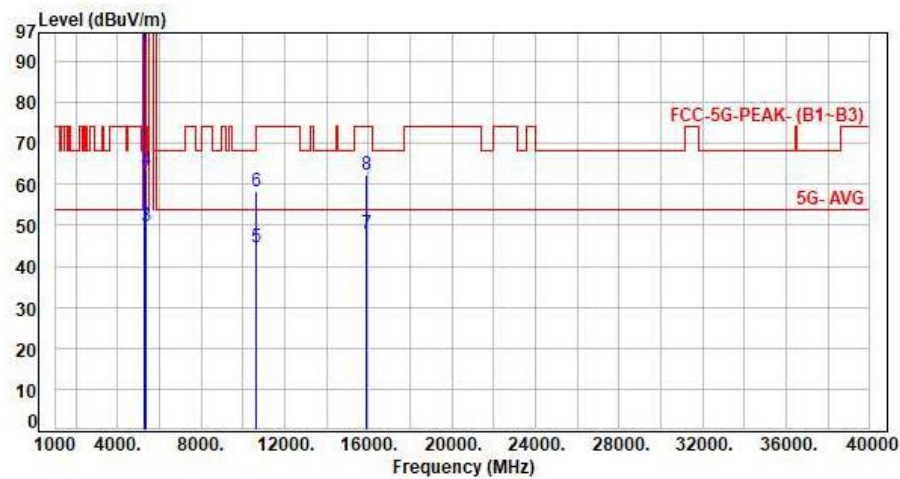


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	86.04	93.59	200.00	-106.41	Average	100	359	P
2	5300.00	7.55	96.90	104.45	200.00	-95.55	Peak	100	359	P
3	5350.00	7.67	42.08	49.75	54.00	-4.25	Average	100	359	P
4	5350.00	7.67	55.65	63.32	74.00	-10.68	Peak	100	359	P
5	10600.00	15.69	28.78	44.47	54.00	-9.53	Average	100	92	P
6	10600.00	15.69	42.71	58.40	74.00	-15.60	Peak	100	92	P
7	15900.00	19.12	28.68	47.80	54.00	-6.20	Average	100	135	P
8	15900.00	19.12	43.04	62.16	74.00	-11.84	Peak	100	135	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

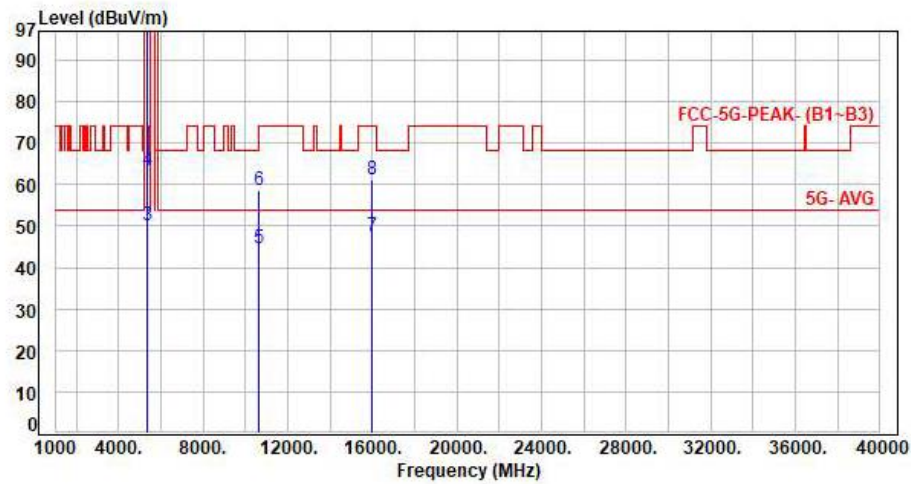

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	87.11	94.71	200.00	-105.29	Average	104	196	P
2	5320.00	7.60	97.90	105.50	200.00	-94.50	Peak	104	196	P
3	5350.00	7.67	42.34	50.01	54.00	-3.99	Average	104	196	P
4	5350.00	7.67	55.79	63.46	74.00	-10.54	Peak	104	196	P
5	10640.00	15.73	28.73	44.46	54.00	-9.54	Average	100	176	P
6	10640.00	15.73	43.03	58.76	74.00	-15.24	Peak	100	176	P
7	15960.00	19.05	28.64	47.69	54.00	-6.31	Average	100	258	P
8	15960.00	19.05	42.26	61.31	74.00	-12.69	Peak	100	258	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

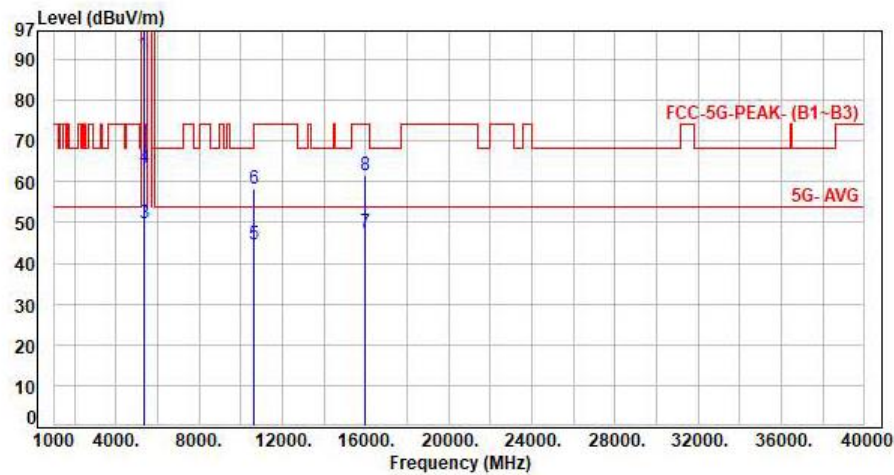

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	83.55	91.15	200.00	-108.85	Average	103	331	P
2	5320.00	7.60	94.35	101.95	200.00	-98.05	Peak	103	331	P
3	5350.00	7.67	42.22	49.89	54.00	-4.11	Average	103	331	P
4	5350.00	7.67	55.81	63.48	74.00	-10.52	Peak	103	331	P
5	10640.00	15.73	28.80	44.53	54.00	-9.47	Average	100	91	P
6	10640.00	15.73	42.36	58.09	74.00	-15.91	Peak	100	91	P
7	15960.00	19.05	28.65	47.70	54.00	-6.30	Average	100	136	P
8	15960.00	19.05	42.54	61.59	74.00	-12.41	Peak	100	136	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT B / B3

Test Mode : 1TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

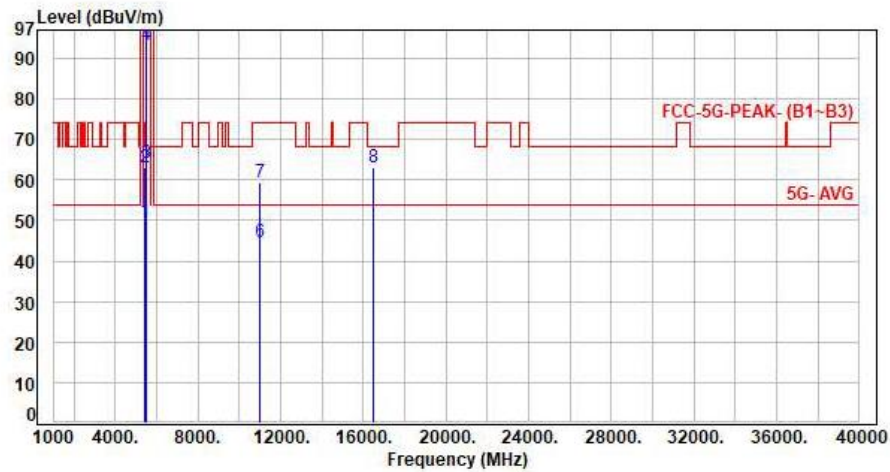

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.06	49.78	54.00	-4.22	Average	161	181	P
2	5460.00	7.72	55.47	63.19	74.00	-10.81	Peak	161	181	P
3	5470.00	7.72	56.40	64.12	68.20	-4.08	Peak	161	181	P
4	5500.00	7.73	85.55	93.28	200.00	-106.72	Average	161	181	P
5	5500.00	7.73	96.35	104.08	200.00	-95.92	Peak	161	181	P
6	11000.00	15.79	28.75	44.54	54.00	-9.46	Average	100	177	P
7	11000.00	15.79	43.44	59.23	74.00	-14.77	Peak	100	177	P
8	16500.00	20.93	42.30	63.23	68.20	-4.97	Peak	100	261	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

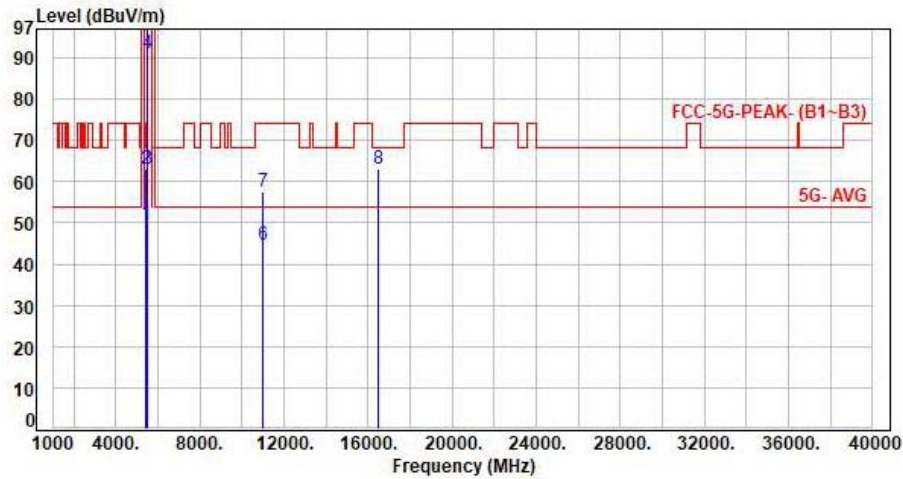

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.07	49.79	54.00	-4.21	Average	102	120	P
2	5460.00	7.72	55.39	63.11	74.00	-10.89	Peak	102	120	P
3	5470.00	7.72	55.51	63.23	68.20	-4.97	Peak	102	120	P
4	5500.00	7.73	83.51	91.24	200.00	-108.76	Average	102	120	P
5	5500.00	7.73	93.99	101.72	200.00	-98.28	Peak	102	120	P
6	11000.00	15.79	28.67	44.46	54.00	-9.54	Average	100	92	P
7	11000.00	15.79	41.84	57.63	74.00	-16.37	Peak	100	92	P
8	16500.00	20.93	42.12	63.05	68.20	-5.15	Peak	100	136	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

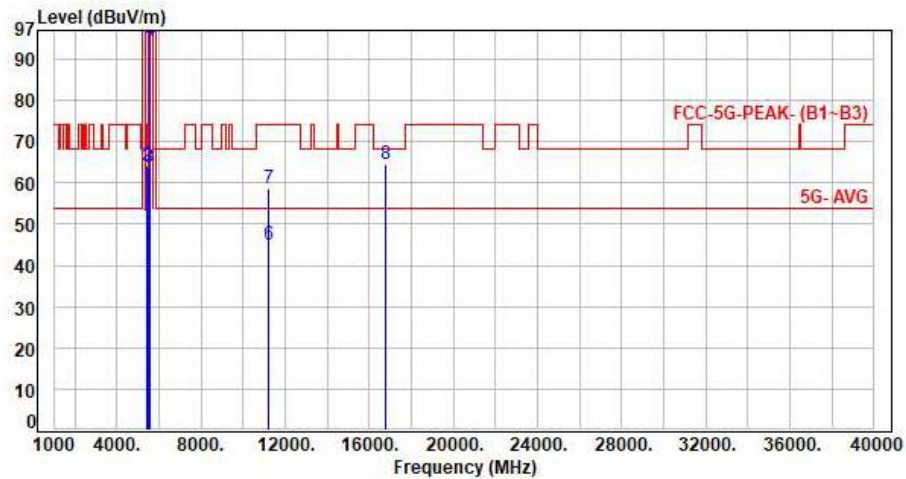

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.04	49.76	54.00	-4.24	Average	203	178	P
2	5460.00	7.72	56.62	64.34	74.00	-9.66	Peak	203	178	P
3	5470.00	7.72	56.08	63.80	68.20	-4.40	Peak	203	178	P
4	5600.00	7.47	87.12	94.59	200.00	-105.41	Average	203	178	P
5	5600.00	7.47	97.90	105.37	200.00	-94.63	Peak	203	178	P
6	11200.00	16.18	28.71	44.89	54.00	-9.11	Average	100	171	P
7	11200.00	16.18	42.38	58.56	74.00	-15.44	Peak	100	171	P
8	16800.00	22.69	41.74	64.43	68.20	-3.77	Peak	100	265	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor