




Test Mode : 2TX 11ax20 CH1 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

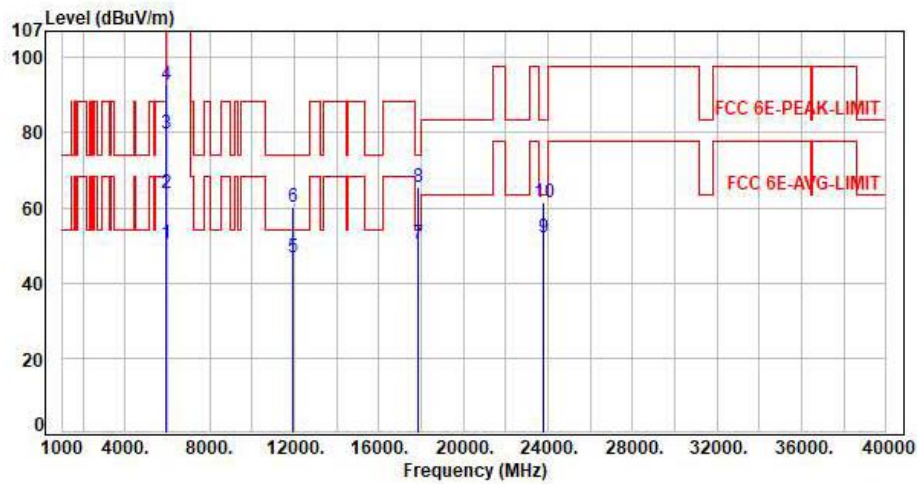

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.99	50.50	68.20	-17.70	Average	385	130	P
2	5925.00	7.51	56.42	63.93	88.20	-24.27	Peak	385	130	P
3	5955.00	7.54	72.36	79.90	200.00	-120.10	Average	385	130	P
4	5955.00	7.54	85.27	92.81	200.00	-107.19	Peak	385	130	P
5	11910.00	17.96	29.02	46.98	54.00	-7.02	Average	100	128	P
6	11910.00	17.96	42.07	60.03	74.00	-13.97	Peak	100	128	P
7	17865.00	29.59	20.71	50.30	54.00	-3.70	Average	100	157	P
8	17865.00	29.59	35.86	65.45	74.00	-8.55	Peak	100	157	P
9	23820.00	10.06	41.91	51.97	63.54	-11.57	Average	150	360	P
10	23820.00	10.06	51.20	61.26	83.54	-22.28	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

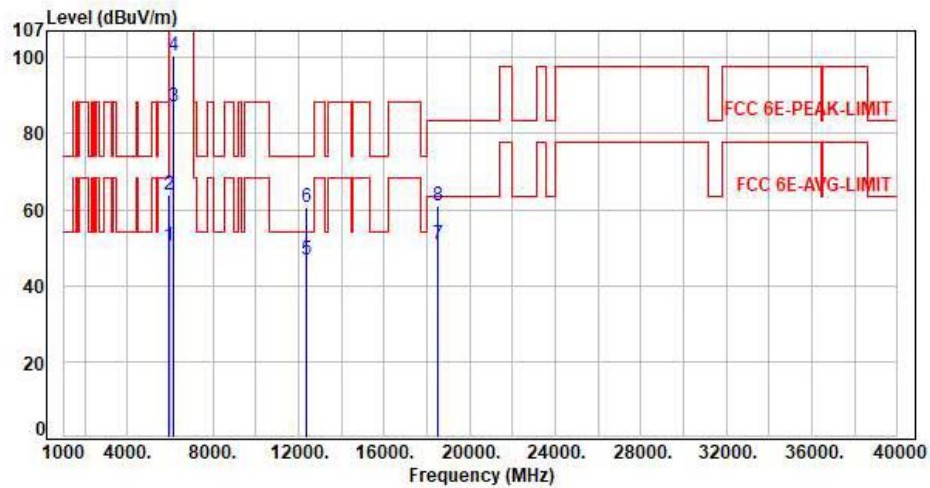

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.93	50.44	68.20	-17.76	Average	138	172	P
2	5925.00	7.51	56.31	63.82	88.20	-24.38	Peak	138	172	P
3	6175.00	8.57	78.57	87.14	200.00	-112.86	Average	138	172	P
4	6175.00	8.57	91.89	100.46	200.00	-99.54	Peak	138	172	P
5	12350.00	17.83	28.90	46.73	54.00	-7.27	Average	100	56	P
6	12350.00	17.83	42.70	60.53	74.00	-13.47	Peak	100	56	P
7	18525.00	9.06	41.78	50.84	63.54	-12.70	Average	150	360	P
8	18525.00	9.06	51.85	60.91	83.54	-22.63	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

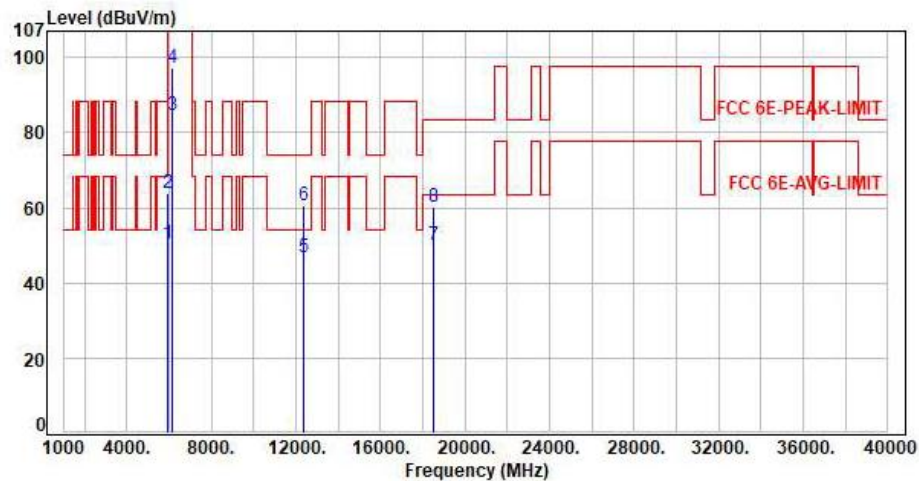

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.96	50.47	68.20	-17.73	Average	296	231	P
2	5925.00	7.51	56.53	64.04	88.20	-24.16	Peak	296	231	P
3	6175.00	8.57	76.23	84.80	200.00	-115.20	Average	296	231	P
4	6175.00	8.57	88.64	97.21	200.00	-102.79	Peak	296	231	P
5	12350.00	17.83	29.09	46.92	54.00	-7.08	Average	100	127	P
6	12350.00	17.83	42.78	60.61	74.00	-13.39	Peak	100	127	P
7	18525.00	9.06	41.16	50.22	63.54	-13.32	Average	150	360	P
8	18525.00	9.06	51.18	60.24	83.54	-23.30	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

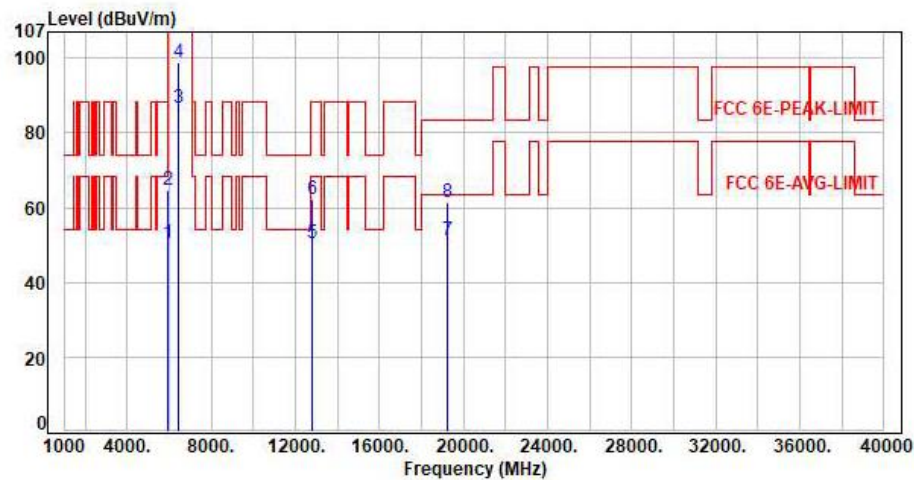

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.94	50.45	68.20	-17.75	Average	149	174	P
2	5925.00	7.51	57.02	64.53	88.20	-23.67	Peak	149	174	P
3	6415.00	9.46	77.14	86.60	200.00	-113.40	Average	149	174	P
4	6415.00	9.46	89.47	98.93	200.00	-101.07	Peak	149	174	P
5	12830.00	18.56	31.85	50.41	68.20	-17.79	Average	100	55	P
6	12830.00	18.56	43.81	62.37	88.20	-25.83	Peak	100	55	P
7	19245.00	9.93	41.44	51.37	63.54	-12.17	Average	150	360	P
8	19245.00	9.93	51.70	61.63	83.54	-21.91	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

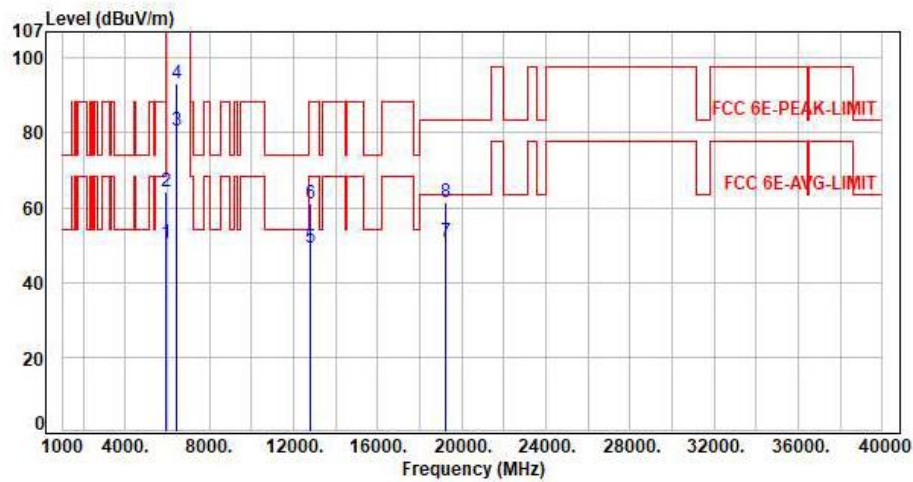

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.86	50.37	68.20	-17.83	Average	105	142	P
2	5925.00	7.51	56.78	64.29	88.20	-23.91	Peak	105	142	P
3	6415.00	9.46	71.29	80.75	200.00	-119.25	Average	105	142	P
4	6415.00	9.46	83.74	93.20	200.00	-106.80	Peak	105	142	P
5	12830.00	18.56	30.86	49.42	68.20	-18.78	Average	100	126	P
6	12830.00	18.56	42.33	60.89	88.20	-27.31	Peak	100	126	P
7	19245.00	9.93	41.00	50.93	63.54	-12.61	Average	150	360	P
8	19245.00	9.93	51.31	61.24	83.54	-22.30	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH3 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

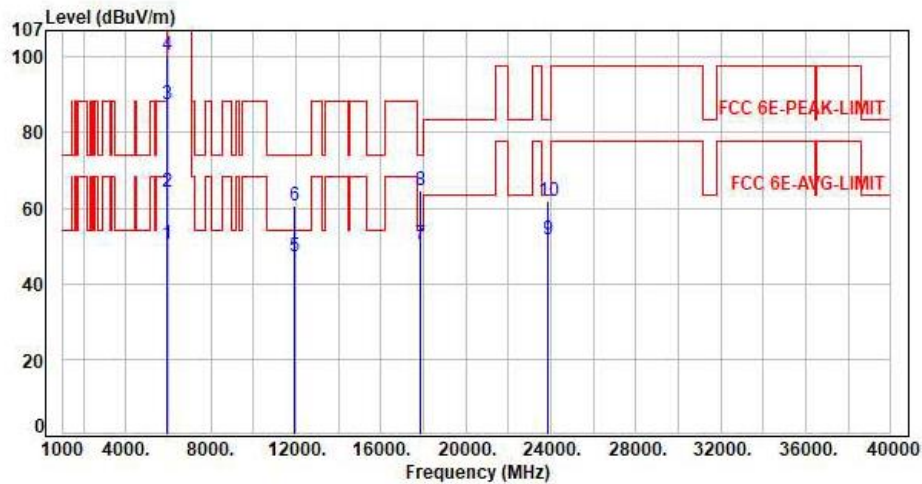

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.93	50.44	68.20	-17.76	Average	200	167	P
2	5925.00	7.51	56.70	64.21	88.20	-23.99	Peak	200	167	P
3	5965.00	7.53	80.02	87.55	200.00	-112.45	Average	200	167	P
4	5965.00	7.53	92.91	100.44	200.00	-99.56	Peak	200	167	P
5	11930.00	17.99	29.11	47.10	54.00	-6.90	Average	100	59	P
6	11930.00	17.99	42.71	60.70	74.00	-13.30	Peak	100	59	P
7	17895.00	29.67	20.95	50.62	54.00	-3.38	Average	100	225	P
8	17895.00	29.67	35.03	64.70	74.00	-9.30	Peak	100	225	P
9	23860.00	10.09	41.49	51.58	63.54	-11.96	Average	150	360	P
10	23860.00	10.09	51.69	61.78	83.54	-21.76	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH3 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

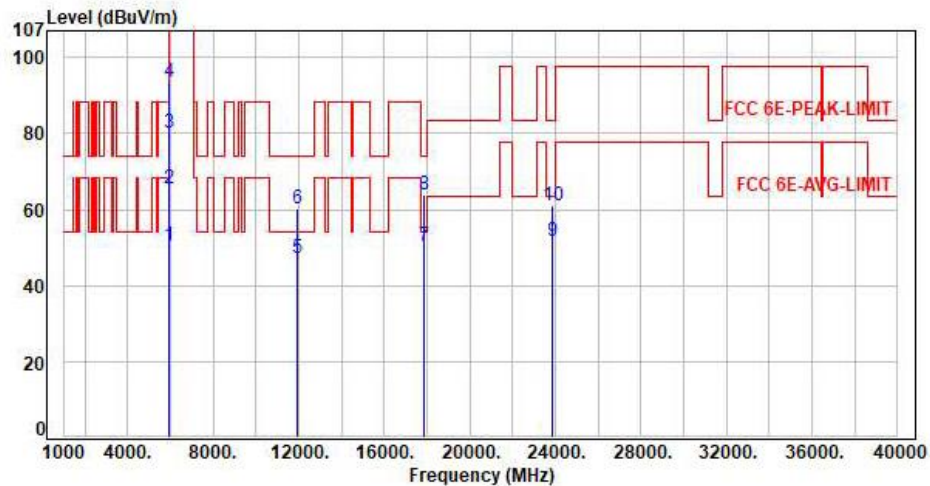

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.89	50.40	68.20	-17.80	Average	387	130	P
2	5925.00	7.51	57.84	65.35	88.20	-22.85	Peak	387	130	P
3	5965.00	7.53	72.72	80.25	200.00	-119.75	Average	387	130	P
4	5965.00	7.53	85.90	93.43	200.00	-106.57	Peak	387	130	P
5	11930.00	17.99	29.07	47.06	54.00	-6.94	Average	100	126	P
6	11930.00	17.99	42.23	60.22	74.00	-13.78	Peak	100	126	P
7	17895.00	29.67	20.89	50.56	54.00	-3.44	Average	100	157	P
8	17895.00	29.67	34.41	64.08	74.00	-9.92	Peak	100	157	P
9	23860.00	10.09	41.64	51.73	63.54	-11.81	Average	150	360	P
10	23860.00	10.09	51.11	61.20	83.54	-22.34	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

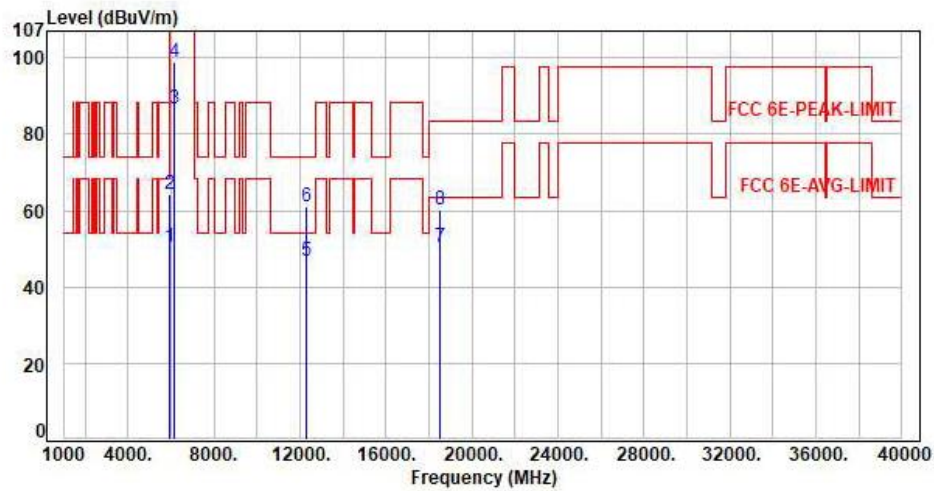

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.85	50.36	68.20	-17.84	Average	135	174	P
2	5925.00	7.51	56.78	64.29	88.20	-23.91	Peak	135	174	P
3	6165.00	8.55	77.99	86.54	200.00	-113.46	Average	135	174	P
4	6165.00	8.55	90.43	98.98	200.00	-101.02	Peak	135	174	P
5	12330.00	17.87	28.97	46.84	54.00	-7.16	Average	100	58	P
6	12330.00	17.87	43.23	61.10	74.00	-12.90	Peak	100	58	P
7	18495.00	8.95	41.39	50.34	63.54	-13.20	Average	150	360	P
8	18495.00	8.95	51.17	60.12	83.54	-23.42	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

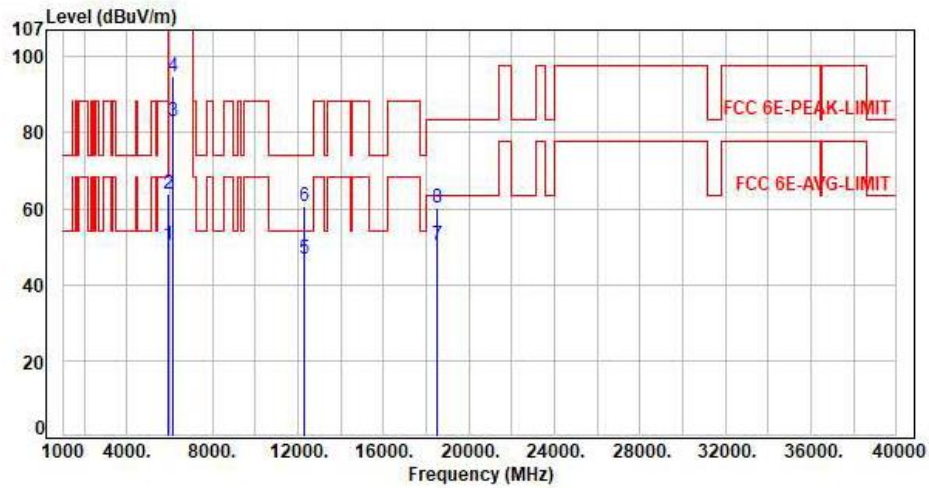

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.93	50.44	68.20	-17.76	Average	367	136	P
2	5925.00	7.51	56.56	64.07	88.20	-24.13	Peak	367	136	P
3	6165.00	8.55	74.33	82.88	200.00	-117.12	Average	367	136	P
4	6165.00	8.55	86.27	94.82	200.00	-105.18	Peak	367	136	P
5	12330.00	17.87	29.06	46.93	54.00	-7.07	Average	100	129	P
6	12330.00	17.87	42.91	60.78	74.00	-13.22	Peak	100	129	P
7	18495.00	8.95	41.34	50.29	63.54	-13.25	Average	150	360	P
8	18495.00	8.95	51.07	60.02	83.54	-23.52	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

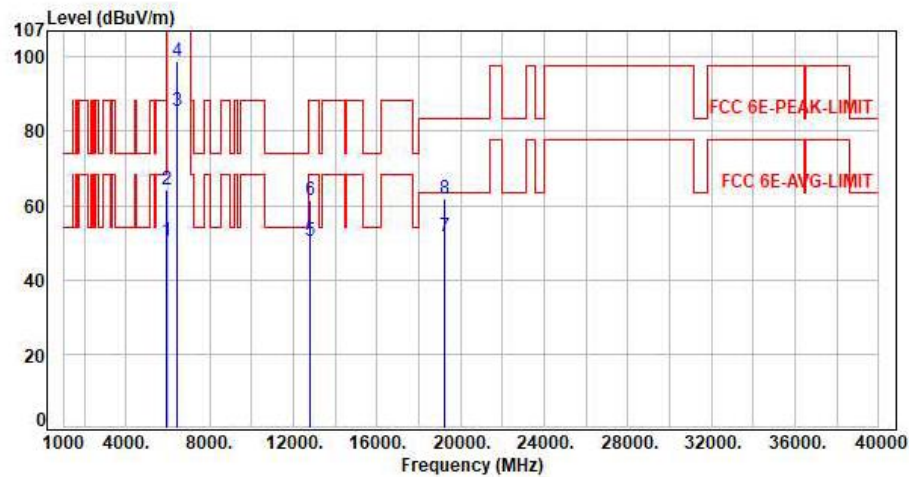

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.86	50.37	68.20	-17.83	Average	156	172	P
2	5925.00	7.51	56.67	64.18	88.20	-24.02	Peak	156	172	P
3	6405.00	9.44	76.03	85.47	200.00	-114.53	Average	156	172	P
4	6405.00	9.44	89.23	98.67	200.00	-101.33	Peak	156	172	P
5	12810.00	18.44	31.94	50.38	68.20	-17.82	Average	100	56	P
6	12810.00	18.44	42.86	61.30	88.20	-26.90	Peak	100	56	P
7	19215.00	9.98	41.79	51.77	63.54	-11.77	Average	150	360	P
8	19215.00	9.98	51.83	61.81	83.54	-21.73	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

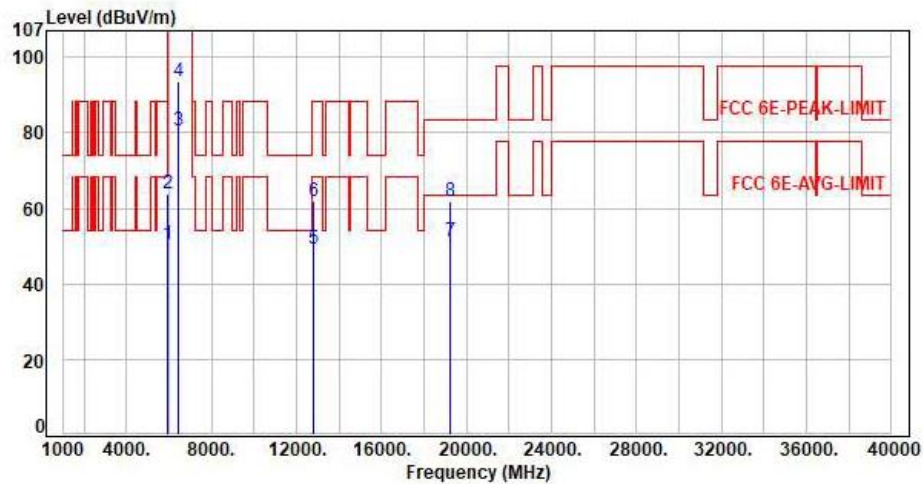

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.84	50.35	68.20	-17.85	Average	100	142	P
2	5925.00	7.51	56.46	63.97	88.20	-24.23	Peak	100	142	P
3	6405.00	9.44	70.98	80.42	200.00	-119.58	Average	100	142	P
4	6405.00	9.44	84.27	93.71	200.00	-106.29	Peak	100	142	P
5	12810.00	18.44	30.97	49.41	68.20	-18.79	Average	100	126	P
6	12810.00	18.44	43.47	61.91	88.20	-26.29	Peak	100	126	P
7	19215.00	9.98	41.31	51.29	63.54	-12.25	Average	150	360	P
8	19215.00	9.98	51.88	61.86	83.54	-21.68	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH7 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

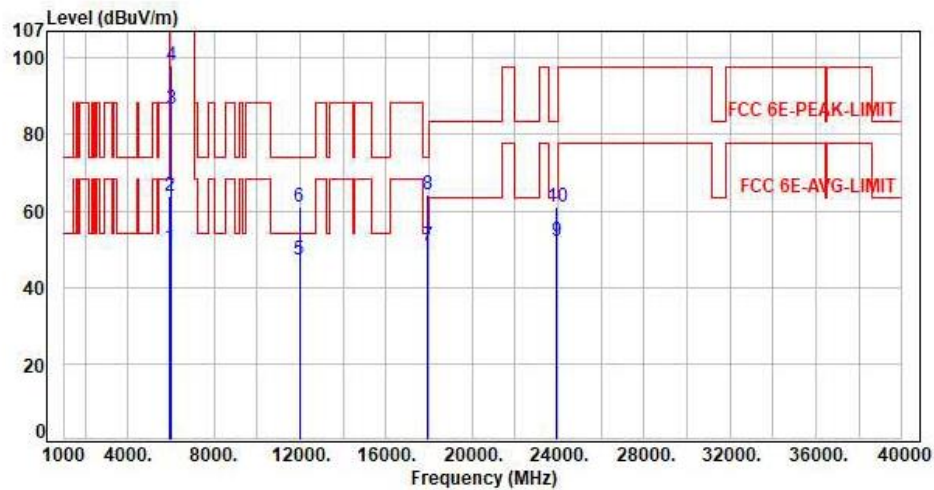

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.90	50.41	68.20	-17.79	Average	206	168	P
2	5925.00	7.51	56.53	64.04	88.20	-24.16	Peak	206	168	P
3	5985.00	7.52	79.09	86.61	200.00	-113.39	Average	206	168	P
4	5985.00	7.52	90.71	98.23	200.00	-101.77	Peak	206	168	P
5	11970.00	18.01	29.24	47.25	54.00	-6.75	Average	100	59	P
6	11970.00	18.01	43.07	61.08	74.00	-12.92	Peak	100	59	P
7	17955.00	29.63	21.18	50.81	54.00	-3.19	Average	100	224	P
8	17955.00	29.63	34.52	64.15	74.00	-9.85	Peak	100	224	P
9	23940.00	10.15	41.89	52.04	63.54	-11.50	Average	150	360	P
10	23940.00	10.15	51.05	61.20	83.54	-22.34	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH7 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

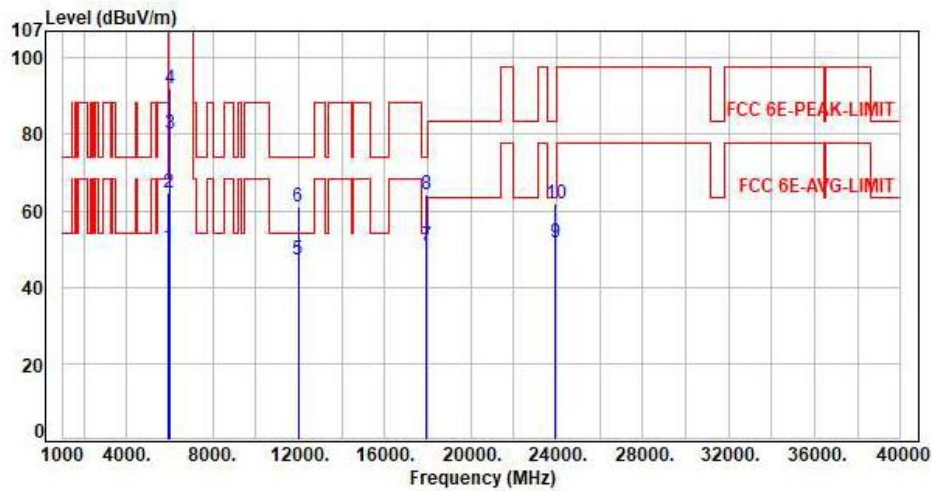

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.80	50.31	68.20	-17.89	Average	381	130	P
2	5925.00	7.51	57.04	64.55	88.20	-23.65	Peak	381	130	P
3	5985.00	7.52	72.57	80.09	200.00	-119.91	Average	381	130	P
4	5985.00	7.52	84.49	92.01	200.00	-107.99	Peak	381	130	P
5	11970.00	18.01	29.16	47.17	54.00	-6.83	Average	100	128	P
6	11970.00	18.01	42.85	60.86	74.00	-13.14	Peak	100	128	P
7	17955.00	29.63	21.14	50.77	54.00	-3.23	Average	100	156	P
8	17955.00	29.63	34.61	64.24	74.00	-9.76	Peak	100	156	P
9	23940.00	10.15	41.70	51.85	63.54	-11.69	Average	150	360	P
10	23940.00	10.15	51.55	61.70	83.54	-21.84	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

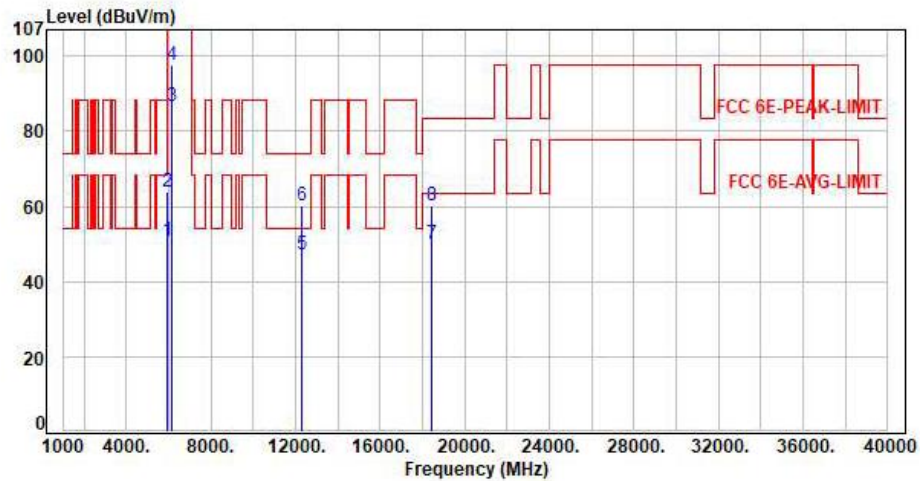

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.17	50.68	68.20	-17.52	Average	100	173	P
2	5925.00	7.51	56.44	63.95	88.20	-24.25	Peak	100	173	P
3	6145.00	8.49	78.24	86.73	200.00	-113.27	Average	100	173	P
4	6145.00	8.49	89.24	97.73	200.00	-102.27	Peak	100	173	P
5	12290.00	17.92	29.20	47.12	54.00	-6.88	Average	100	57	P
6	12290.00	17.92	42.28	60.20	74.00	-13.80	Peak	100	57	P
7	18435.00	8.99	41.21	50.20	63.54	-13.34	Average	150	360	P
8	18435.00	8.99	51.24	60.23	83.54	-23.31	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

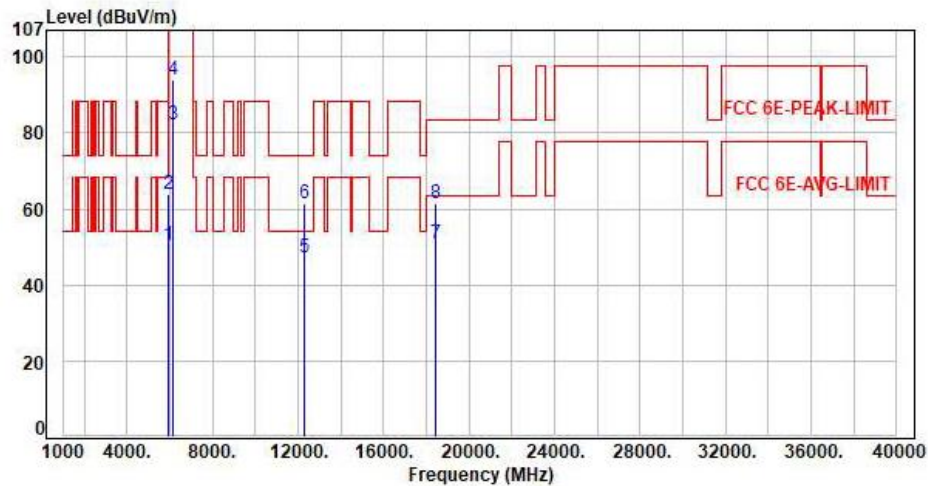


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.08	50.59	68.20	-17.61	Average	195	204	P
2	5925.00	7.51	56.32	63.83	88.20	-24.37	Peak	195	204	P
3	6145.00	8.49	73.53	82.02	200.00	-117.98	Average	195	204	P
4	6145.00	8.49	85.35	93.84	200.00	-106.16	Peak	195	204	P
5	12290.00	17.92	29.27	47.19	54.00	-6.81	Average	100	124	P
6	12290.00	17.92	43.55	61.47	74.00	-12.53	Peak	100	124	P
7	18435.00	8.99	41.95	50.94	63.54	-12.60	Average	150	360	P
8	18435.00	8.99	52.47	61.46	83.54	-22.08	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor

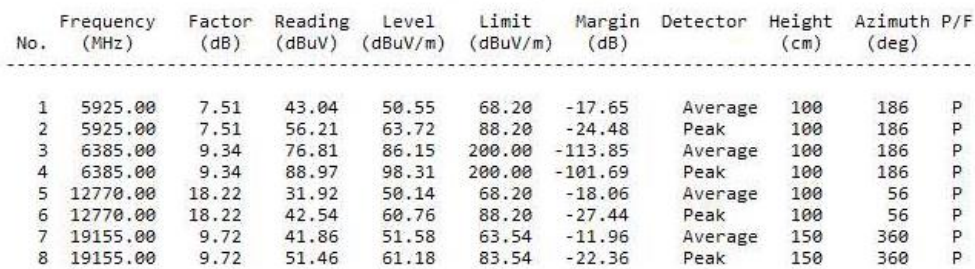

Issued date : May. 16, 2025
Page No. : 105 of 226
FCC ID : RBWESYQC5



Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

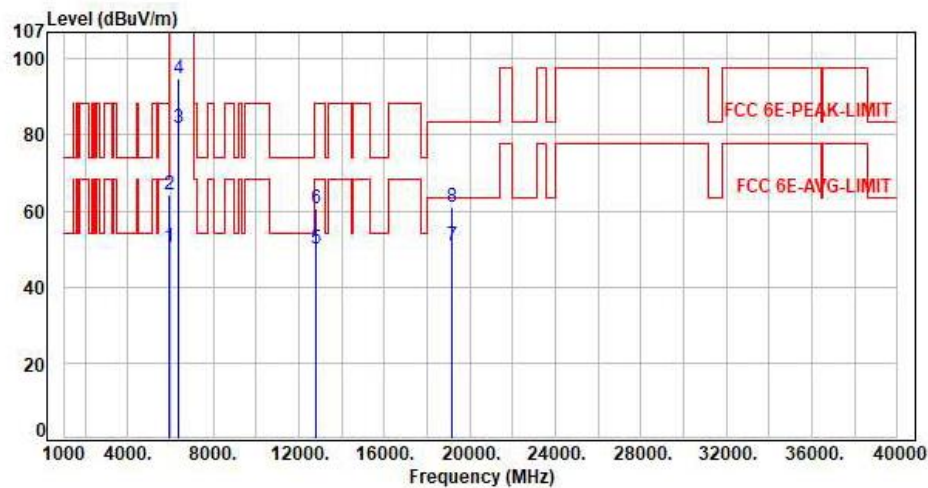

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.10	50.61	68.20	-17.59	Average	342	142	P
2	5925.00	7.51	56.88	64.39	88.20	-23.81	Peak	342	142	P
3	6385.00	9.34	72.42	81.76	200.00	-118.24	Average	342	142	P
4	6385.00	9.34	85.53	94.87	200.00	-105.13	Peak	342	142	P
5	12770.00	18.22	31.67	49.89	68.20	-18.31	Average	100	125	P
6	12770.00	18.22	42.24	60.46	88.20	-27.74	Peak	100	125	P
7	19155.00	9.72	41.19	50.91	63.54	-12.63	Average	150	360	P
8	19155.00	9.72	51.20	60.92	83.54	-22.62	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

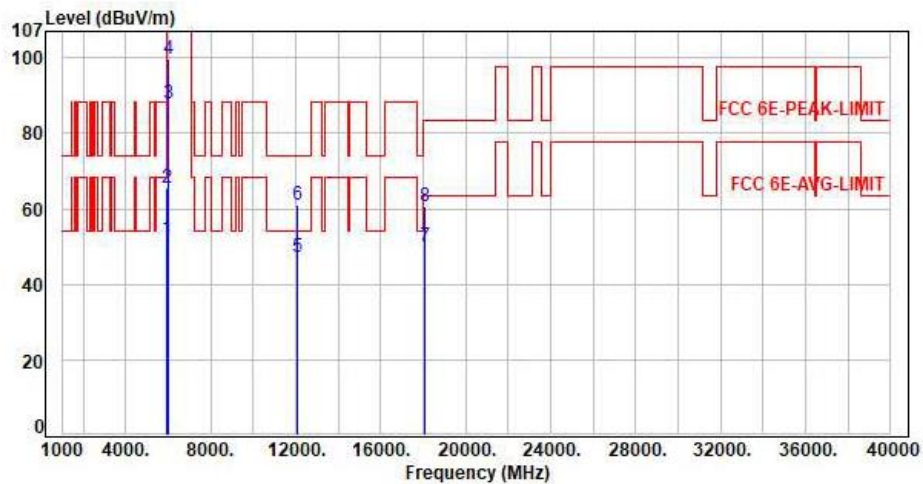

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	44.62	52.13	68.20	-16.07	Average	136	167	P
2	5925.00	7.51	58.04	65.55	88.20	-22.65	Peak	136	167	P
3	6025.00	7.71	80.20	87.91	200.00	-112.09	Average	136	167	P
4	6025.00	7.71	92.00	99.71	200.00	-100.29	Peak	136	167	P
5	12050.00	18.13	29.25	47.38	54.00	-6.62	Average	100	55	P
6	12050.00	18.13	42.88	61.01	74.00	-12.99	Peak	100	55	P
7	18075.00	8.75	41.29	50.04	63.54	-13.50	Average	150	360	P
8	18075.00	8.75	51.72	60.47	83.54	-23.07	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

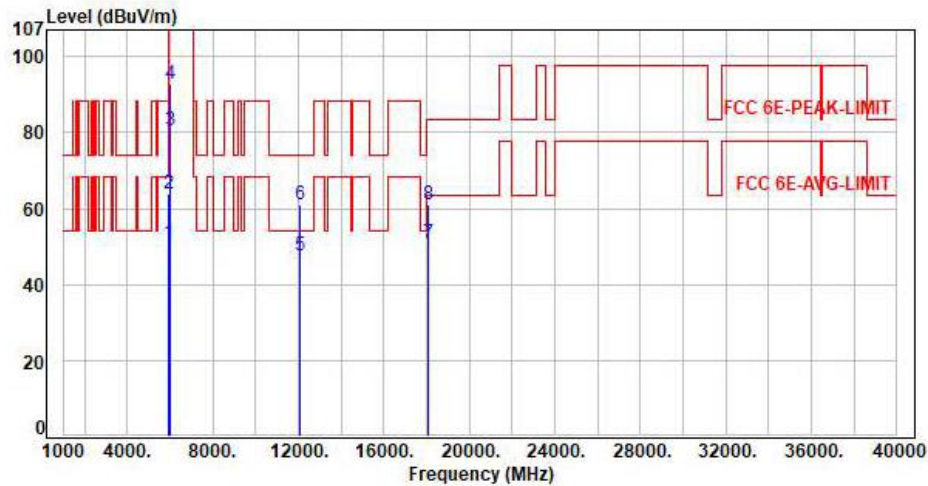

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.28	50.79	68.20	-17.41	Average	283	125	P
2	5925.00	7.51	56.32	63.83	88.20	-24.37	Peak	283	125	P
3	6025.00	7.71	72.67	80.38	200.00	-119.62	Average	283	125	P
4	6025.00	7.71	84.86	92.57	200.00	-107.43	Peak	283	125	P
5	12050.00	18.13	29.39	47.52	54.00	-6.48	Average	100	124	P
6	12050.00	18.13	42.73	60.86	74.00	-13.14	Peak	100	124	P
7	18075.00	8.75	41.93	50.68	63.54	-12.86	Average	150	360	P
8	18075.00	8.75	52.46	61.21	83.54	-22.33	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

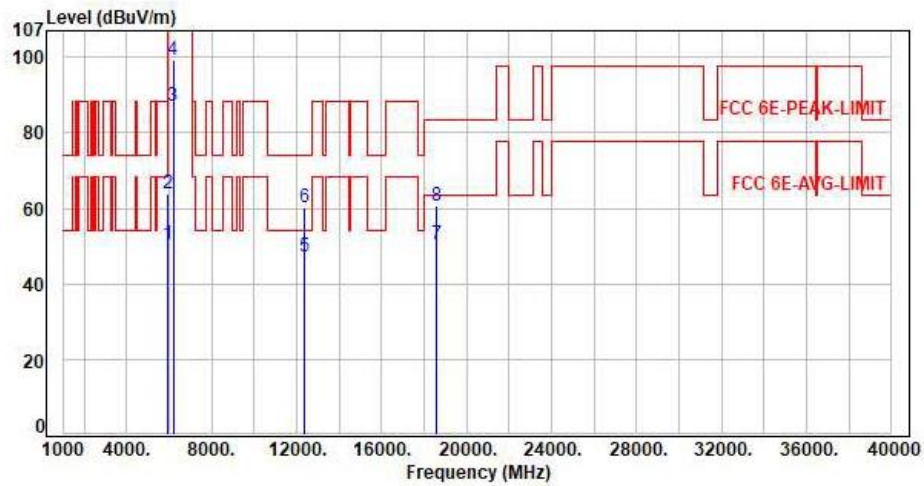


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.12	50.63	68.20	-17.57	Average	132	175	P
2	5925.00	7.51	56.56	64.07	88.20	-24.13	Peak	132	175	P
3	6185.00	8.59	78.65	87.24	200.00	-112.76	Average	132	175	P
4	6185.00	8.59	90.88	99.47	200.00	-100.53	Peak	132	175	P
5	12370.00	17.76	29.27	47.03	54.00	-6.97	Average	100	56	P
6	12370.00	17.76	42.45	60.21	74.00	-13.79	Peak	100	56	P
7	18555.00	9.17	41.41	50.58	63.54	-12.96	Average	150	360	P
8	18555.00	9.17	51.27	60.44	83.54	-23.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

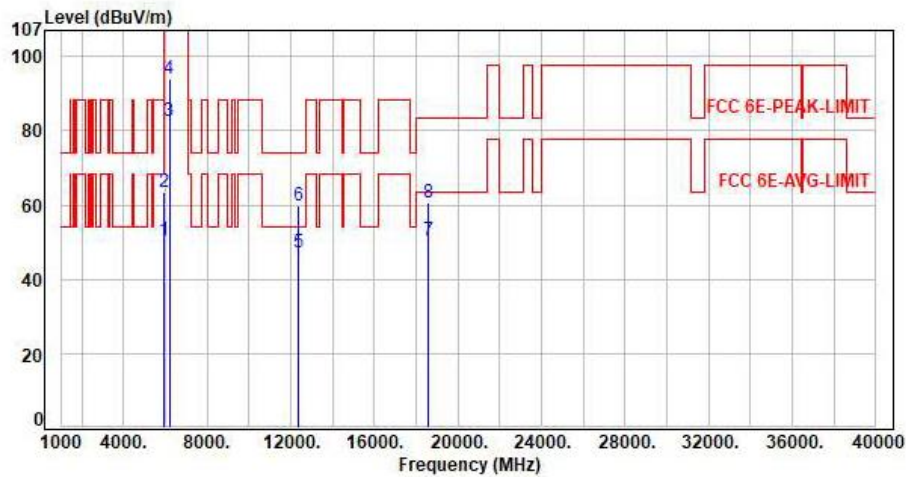

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.02	50.53	68.20	-17.67	Average	339	203	P
2	5925.00	7.51	56.11	63.62	88.20	-24.58	Peak	339	203	P
3	6185.00	8.59	73.96	82.55	200.00	-117.45	Average	339	203	P
4	6185.00	8.59	85.41	94.00	200.00	-106.00	Peak	339	203	P
5	12370.00	17.76	29.30	47.06	54.00	-6.94	Average	100	124	P
6	12370.00	17.76	42.17	59.93	74.00	-14.07	Peak	100	124	P
7	18555.00	9.17	41.41	50.58	63.54	-12.96	Average	150	360	P
8	18555.00	9.17	51.46	60.63	83.54	-22.91	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

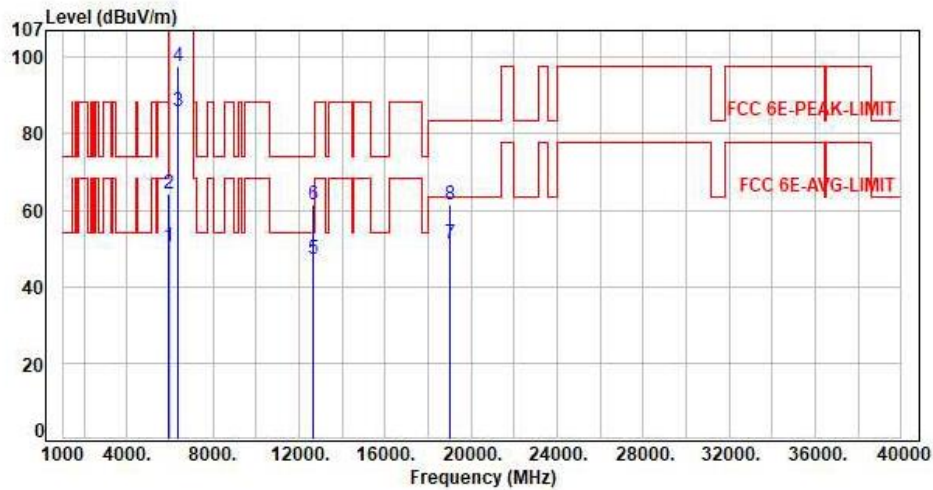

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.10	50.61	68.20	-17.59	Average	112	187	P
2	5925.00	7.51	56.58	64.09	88.20	-24.11	Peak	112	187	P
3	6345.00	9.11	76.79	85.90	200.00	-114.10	Average	112	187	P
4	6345.00	9.11	88.41	97.52	200.00	-102.48	Peak	112	187	P
5	12690.00	18.00	29.29	47.29	54.00	-6.71	Average	100	61	P
6	12690.00	18.00	43.38	61.38	74.00	-12.62	Peak	100	61	P
7	19035.00	9.65	41.65	51.30	63.54	-12.24	Average	150	360	P
8	19035.00	9.65	51.80	61.45	83.54	-22.09	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

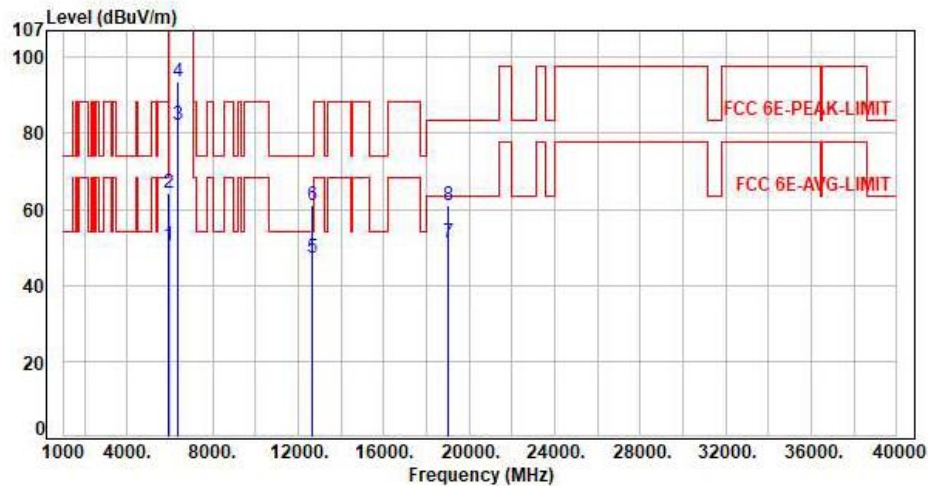

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.12	50.63	68.20	-17.57	Average	165	221	P
2	5925.00	7.51	56.70	64.21	88.20	-23.99	Peak	165	221	P
3	6345.00	9.11	73.22	82.33	200.00	-117.67	Average	165	221	P
4	6345.00	9.11	84.61	93.72	200.00	-106.28	Peak	165	221	P
5	12690.00	18.00	29.24	47.24	54.00	-6.76	Average	100	128	P
6	12690.00	18.00	43.13	61.13	74.00	-12.87	Peak	100	128	P
7	19035.00	9.65	41.53	51.18	63.54	-12.36	Average	150	360	P
8	19035.00	9.65	51.30	60.95	83.54	-22.59	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO B6

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

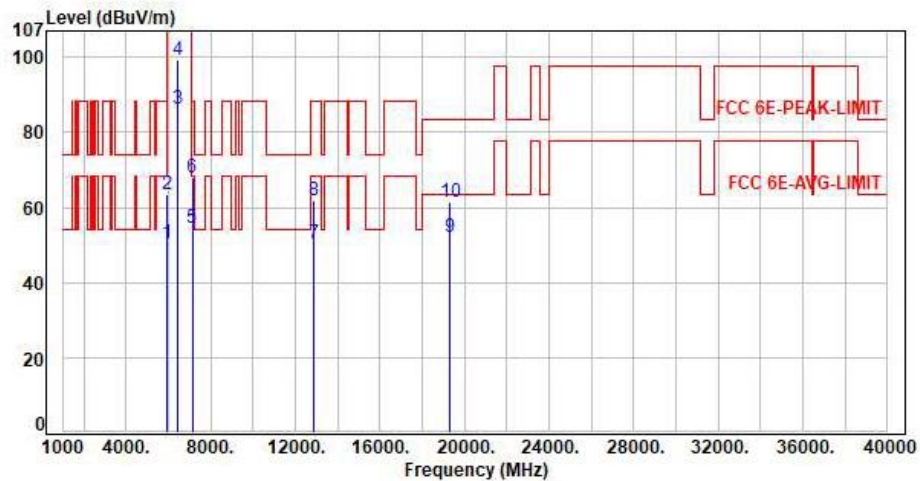

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.80	50.31	68.20	-17.89	Average	147	178	P
2	5925.00	7.51	55.94	63.45	88.20	-24.75	Peak	147	178	P
3	6435.00	9.50	76.81	86.31	200.00	-113.69	Average	147	178	P
4	6435.00	9.50	89.63	99.13	200.00	-100.87	Peak	147	178	P
5	7125.00	11.56	42.79	54.35	68.20	-13.85	Average	147	178	P
6	7125.00	11.56	56.43	67.99	88.20	-20.21	Peak	147	178	P
7	12870.00	18.75	31.86	50.61	68.20	-17.59	Average	100	56	P
8	12870.00	18.75	42.94	61.69	88.20	-26.51	Peak	100	56	P
9	19305.00	10.05	41.90	51.95	63.54	-11.59	Average	150	360	P
10	19305.00	10.05	51.57	61.62	83.54	-21.92	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

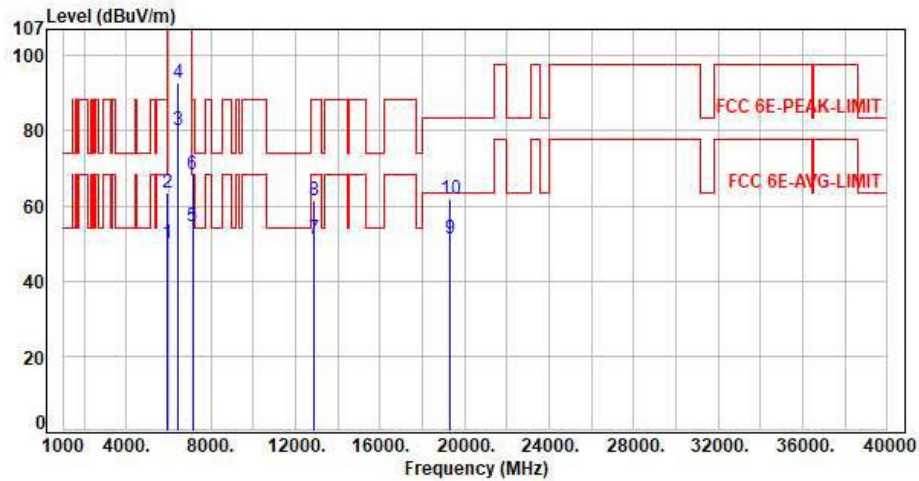


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.72	50.23	68.20	-17.97	Average	100	141	P
2	5925.00	7.51	55.88	63.39	88.20	-24.81	Peak	100	141	P
3	6435.00	9.50	70.79	80.29	200.00	-119.71	Average	100	141	P
4	6435.00	9.50	83.19	92.69	200.00	-107.31	Peak	100	141	P
5	7125.00	11.56	42.77	54.33	68.20	-13.87	Average	100	141	P
6	7125.00	11.56	56.66	68.22	88.20	-19.98	Peak	100	141	P
7	12870.00	18.75	32.52	51.27	68.20	-16.93	Average	100	125	P
8	12870.00	18.75	42.55	61.30	88.20	-26.90	Peak	100	125	P
9	19305.00	10.05	41.34	51.39	63.54	-12.15	Average	150	360	P
10	19305.00	10.05	51.69	61.74	83.54	-21.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

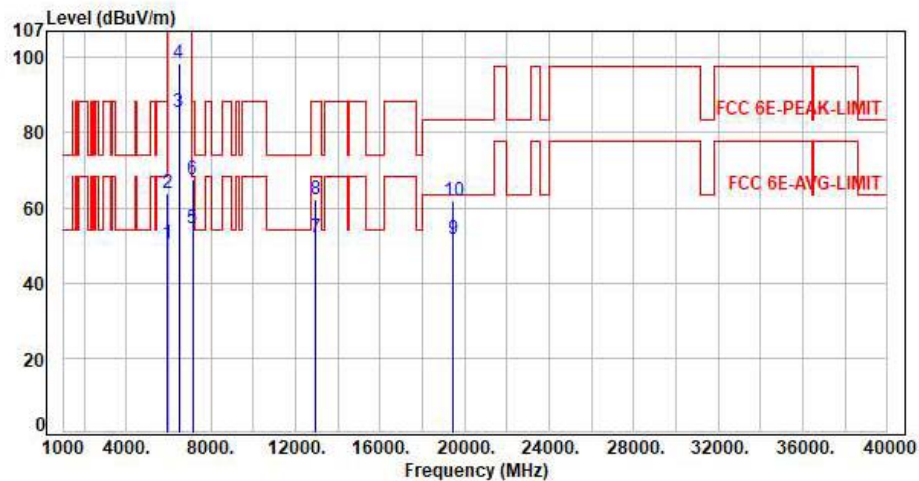

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.77	50.28	68.20	-17.92	Average	100	178	P
2	5925.00	7.51	56.50	64.01	88.20	-24.19	Peak	100	178	P
3	6475.00	9.63	75.98	85.61	200.00	-114.39	Average	100	178	P
4	6475.00	9.63	88.99	98.62	200.00	-101.38	Peak	100	178	P
5	7125.00	11.56	42.77	54.33	68.20	-13.87	Average	100	178	P
6	7125.00	11.56	56.12	67.68	88.20	-20.52	Peak	100	178	P
7	12950.00	19.06	33.01	52.07	68.20	-16.13	Average	100	63	P
8	12950.00	19.06	43.04	62.10	88.20	-26.10	Peak	100	63	P
9	19425.00	10.18	41.46	51.64	63.54	-11.90	Average	150	360	P
10	19425.00	10.18	51.48	61.66	83.54	-21.88	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

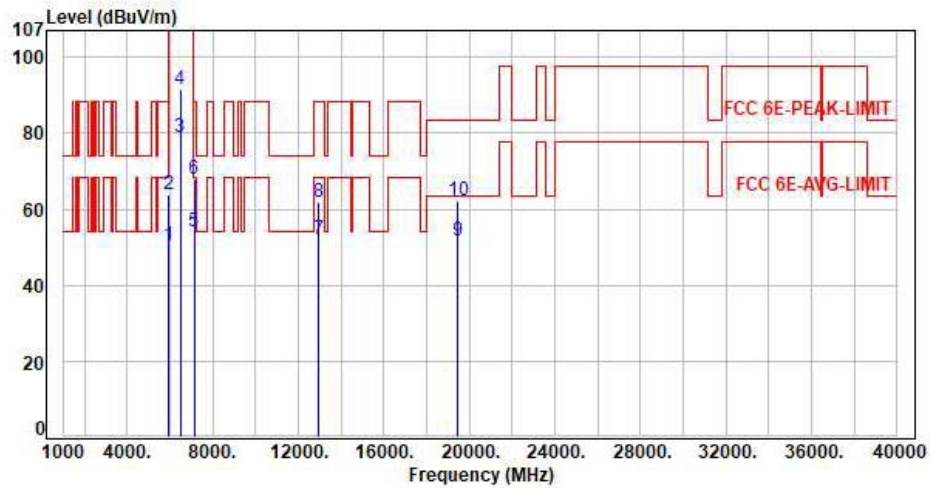


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.78	50.29	68.20	-17.91	Average	120	3	P
2	5925.00	7.51	56.19	63.70	88.20	-24.50	Peak	120	3	P
3	6475.00	9.63	69.44	79.07	200.00	-120.93	Average	120	3	P
4	6475.00	9.63	82.03	91.66	200.00	-108.34	Peak	120	3	P
5	7125.00	11.56	42.72	54.28	68.20	-13.92	Average	120	3	P
6	7125.00	11.56	56.55	68.11	88.20	-20.09	Peak	120	3	P
7	12950.00	19.06	32.97	52.03	68.20	-16.17	Average	100	122	P
8	12950.00	19.06	42.61	61.67	88.20	-26.53	Peak	100	122	P
9	19425.00	10.18	41.40	51.58	63.54	-11.96	Average	150	360	P
10	19425.00	10.18	51.95	62.13	83.54	-21.41	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

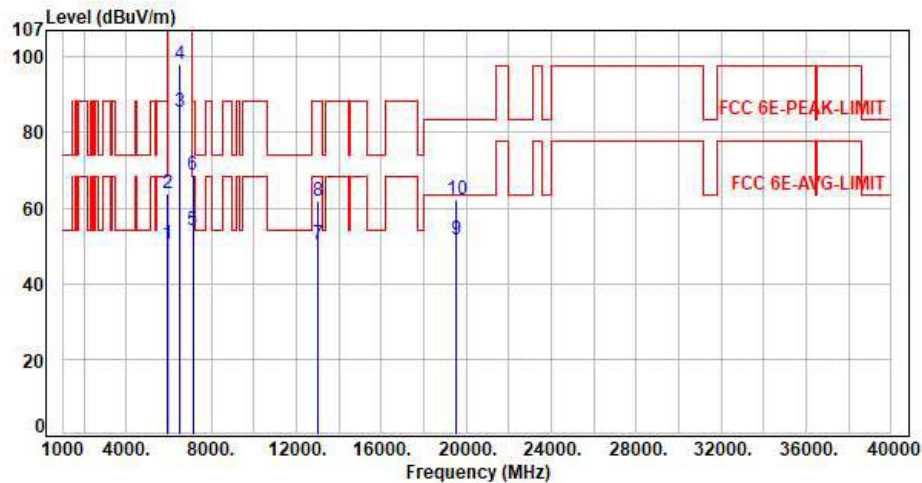

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.82	50.33	68.20	-17.87	Average	172	180	P
2	5925.00	7.51	56.56	64.07	88.20	-24.13	Peak	172	180	P
3	6515.00	9.81	75.46	85.27	200.00	-114.73	Average	172	180	P
4	6515.00	9.81	88.27	98.08	200.00	-101.92	Peak	172	180	P
5	7125.00	11.56	42.74	54.30	68.20	-13.90	Average	172	180	P
6	7125.00	11.56	57.04	68.60	88.20	-19.60	Peak	172	180	P
7	13030.00	19.39	31.12	50.51	68.20	-17.69	Average	100	59	P
8	13030.00	19.39	42.42	61.81	88.20	-26.39	Peak	100	59	P
9	19545.00	10.28	41.19	51.47	63.54	-12.07	Average	150	360	P
10	19545.00	10.28	51.80	62.08	83.54	-21.46	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

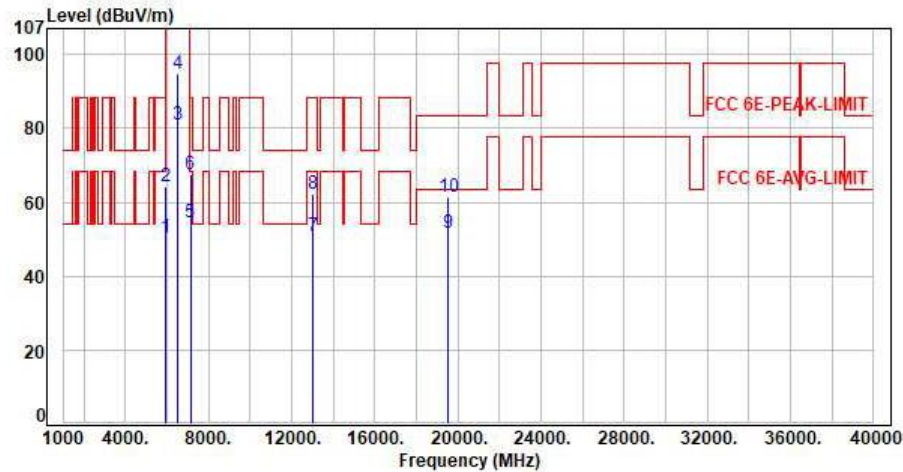

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.74	50.25	68.20	-17.95	Average	283	215	P
2	5925.00	7.51	56.70	64.21	88.20	-23.99	Peak	283	215	P
3	6515.00	9.81	71.28	81.09	200.00	-118.91	Average	283	215	P
4	6515.00	9.81	84.95	94.76	200.00	-105.24	Peak	283	215	P
5	7125.00	11.56	42.81	54.37	68.20	-13.83	Average	283	215	P
6	7125.00	11.56	56.12	67.68	88.20	-20.52	Peak	283	215	P
7	13030.00	19.39	31.49	50.88	68.20	-17.32	Average	100	127	P
8	13030.00	19.39	42.68	62.07	88.20	-26.13	Peak	100	127	P
9	19545.00	10.28	41.32	51.60	63.54	-11.94	Average	150	360	P
10	19545.00	10.28	51.29	61.57	83.54	-21.97	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

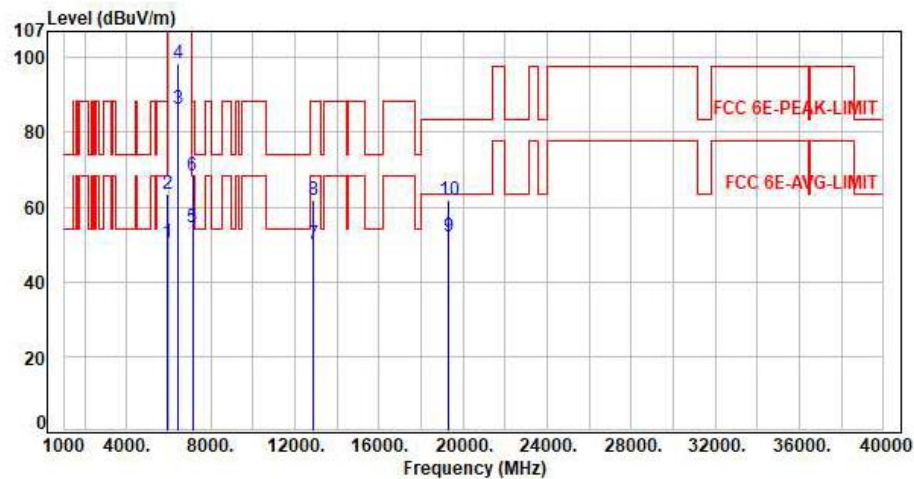

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.86	50.37	68.20	-17.83	Average	133	177	P
2	5925.00	7.51	56.15	63.66	88.20	-24.54	Peak	133	177	P
3	6445.00	9.51	76.58	86.09	200.00	-113.91	Average	133	177	P
4	6445.00	9.51	88.80	98.31	200.00	-101.69	Peak	133	177	P
5	7125.00	11.56	42.85	54.41	68.20	-13.79	Average	133	177	P
6	7125.00	11.56	56.68	68.24	88.20	-19.96	Peak	133	177	P
7	12890.00	18.82	31.40	50.22	68.20	-17.98	Average	100	56	P
8	12890.00	18.82	43.14	61.96	88.20	-26.24	Peak	100	56	P
9	19335.00	10.12	41.93	52.05	63.54	-11.49	Average	150	360	P
10	19335.00	10.12	51.64	61.76	83.54	-21.78	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

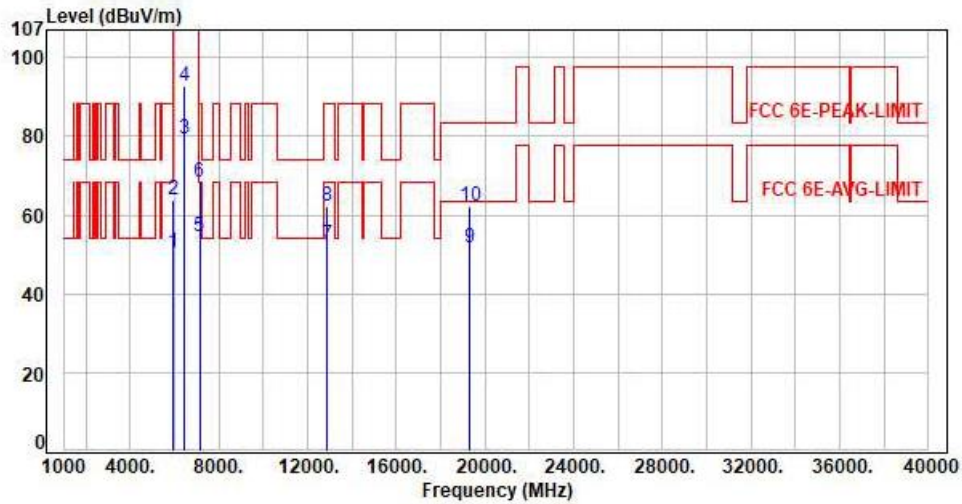

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.87	50.38	68.20	-17.82	Average	138	3	P
2	5925.00	7.51	56.33	63.84	88.20	-24.36	Peak	138	3	P
3	6445.00	9.51	69.96	79.47	200.00	-120.53	Average	138	3	P
4	6445.00	9.51	83.07	92.58	200.00	-107.42	Peak	138	3	P
5	7125.00	11.56	42.86	54.42	68.20	-13.78	Average	138	3	P
6	7125.00	11.56	56.88	68.44	88.20	-19.76	Peak	138	3	P
7	12890.00	18.82	33.46	52.28	68.20	-15.92	Average	100	125	P
8	12890.00	18.82	43.42	62.24	88.20	-25.96	Peak	100	125	P
9	19335.00	10.12	41.47	51.59	63.54	-11.95	Average	150	360	P
10	19335.00	10.12	51.96	62.08	83.54	-21.46	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

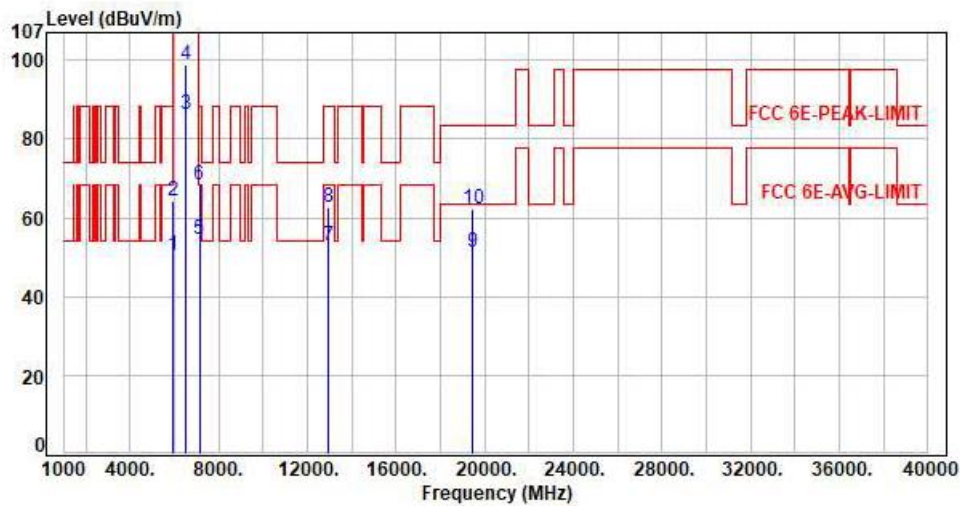

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.81	50.32	68.20	-17.88	Average	173	180	P
2	5925.00	7.51	56.72	64.23	88.20	-23.97	Peak	173	180	P
3	6485.00	9.67	76.56	86.23	200.00	-113.77	Average	173	180	P
4	6485.00	9.67	89.11	98.78	200.00	-101.22	Peak	173	180	P
5	7125.00	11.56	42.85	54.41	68.20	-13.79	Average	173	180	P
6	7125.00	11.56	56.93	68.49	88.20	-19.71	Peak	173	180	P
7	12970.00	19.14	33.94	53.08	68.20	-15.12	Average	100	57	P
8	12970.00	19.14	43.33	62.47	88.20	-25.73	Peak	100	57	P
9	19455.00	10.21	41.12	51.33	63.54	-12.21	Average	150	360	P
10	19455.00	10.21	51.85	62.06	83.54	-21.48	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

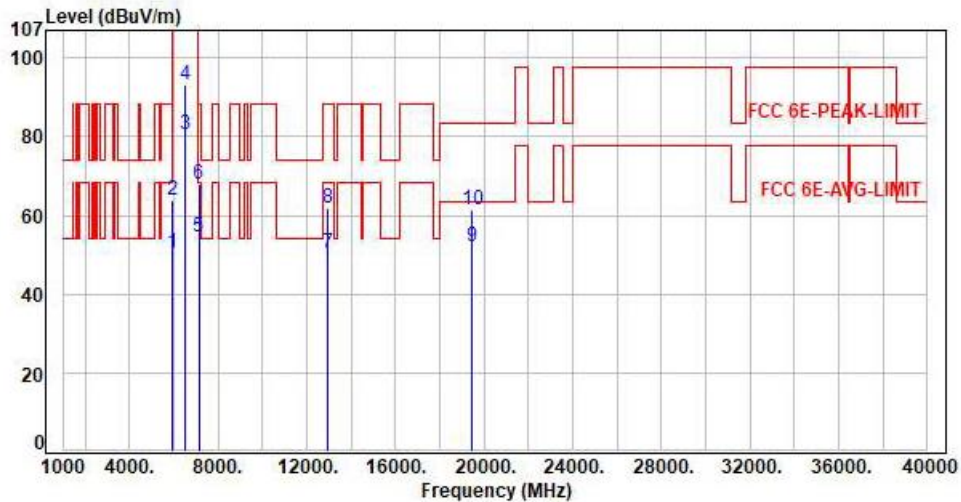

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.86	50.37	68.20	-17.83	Average	128	3	P
2	5925.00	7.51	56.49	64.00	88.20	-24.20	Peak	128	3	P
3	6485.00	9.67	70.73	80.40	200.00	-119.60	Average	128	3	P
4	6485.00	9.67	83.35	93.02	200.00	-106.98	Peak	128	3	P
5	7125.00	11.56	42.81	54.37	68.20	-13.83	Average	128	3	P
6	7125.00	11.56	56.26	67.82	88.20	-20.38	Peak	128	3	P
7	12970.00	19.14	31.31	50.45	68.20	-17.75	Average	100	122	P
8	12970.00	19.14	42.51	61.65	88.20	-26.55	Peak	100	122	P
9	19455.00	10.21	41.94	52.15	63.54	-11.39	Average	150	360	P
10	19455.00	10.21	51.27	61.48	83.54	-22.06	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

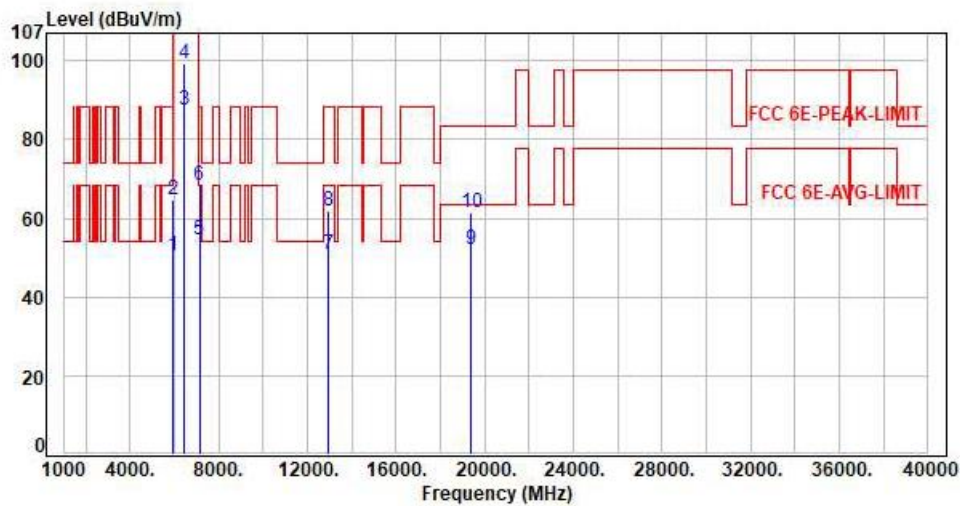

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.14	50.65	68.20	-17.55	Average	119	179	P
2	5925.00	7.51	57.14	64.65	88.20	-23.55	Peak	119	179	P
3	6465.00	9.59	77.90	87.49	200.00	-112.51	Average	119	179	P
4	6465.00	9.59	89.55	99.14	200.00	-100.86	Peak	119	179	P
5	7125.00	11.56	42.95	54.51	68.20	-13.69	Average	119	179	P
6	7125.00	11.56	56.80	68.36	88.20	-19.84	Peak	119	179	P
7	12930.00	18.97	31.98	50.95	68.20	-17.25	Average	100	62	P
8	12930.00	18.97	42.99	61.96	88.20	-26.24	Peak	100	62	P
9	19395.00	10.17	41.91	52.08	63.54	-11.46	Average	150	360	P
10	19395.00	10.17	51.09	61.26	83.54	-22.28	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

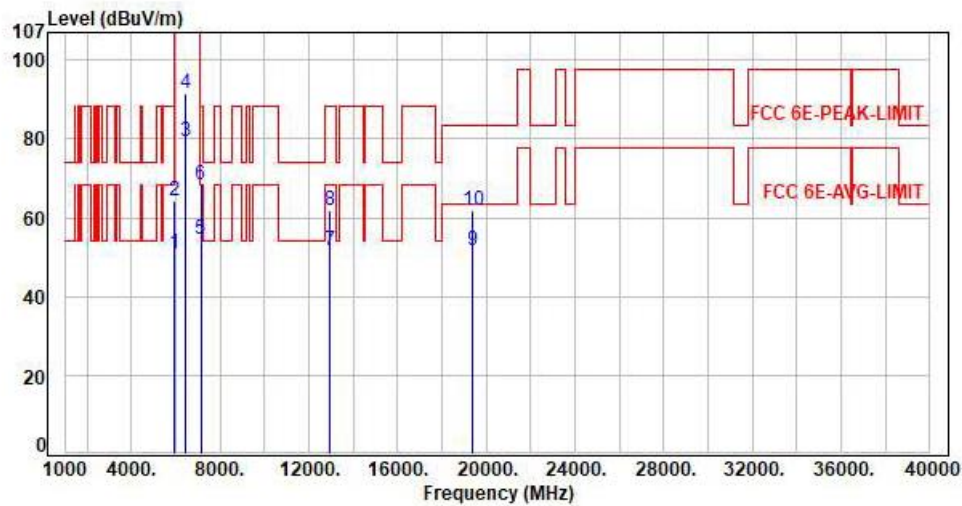


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.25	50.76	68.20	-17.44	Average	100	336	P
2	5925.00	7.51	56.62	64.13	88.20	-24.07	Peak	100	336	P
3	6465.00	9.59	69.55	79.14	200.00	-120.86	Average	100	336	P
4	6465.00	9.59	82.03	91.62	200.00	-108.38	Peak	100	336	P
5	7125.00	11.56	42.97	54.53	68.20	-13.67	Average	100	336	P
6	7125.00	11.56	56.82	68.38	88.20	-19.82	Peak	100	336	P
7	12930.00	18.97	32.66	51.63	68.20	-16.57	Average	100	130	P
8	12930.00	18.97	42.80	61.77	88.20	-26.43	Peak	100	130	P
9	19395.00	10.17	41.30	51.47	63.54	-12.07	Average	150	360	P
10	19395.00	10.17	51.64	61.81	83.54	-21.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO B7

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

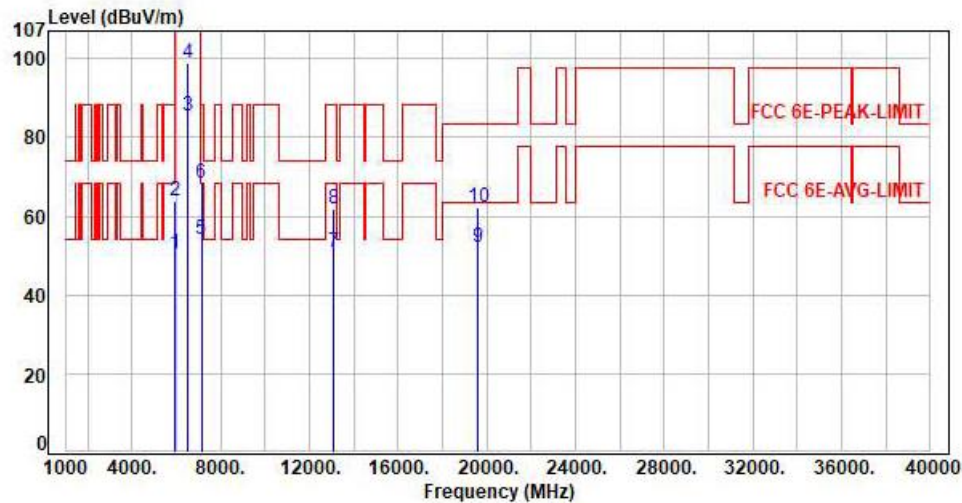

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.78	50.29	68.20	-17.91	Average	161	181	P
2	5925.00	7.51	56.21	63.72	88.20	-24.48	Peak	161	181	P
3	6535.00	9.90	75.64	85.54	200.00	-114.46	Average	161	181	P
4	6535.00	9.90	88.91	98.81	200.00	-101.19	Peak	161	181	P
5	7125.00	11.56	42.74	54.30	68.20	-13.90	Average	161	181	P
6	7125.00	11.56	56.71	68.27	88.20	-19.93	Peak	161	181	P
7	13070.00	19.57	31.15	50.72	68.20	-17.48	Average	100	61	P
8	13070.00	19.57	42.21	61.78	88.20	-26.42	Peak	100	61	P
9	19605.00	10.53	41.68	52.21	63.54	-11.33	Average	150	360	P
10	19605.00	10.53	51.74	62.27	83.54	-21.27	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

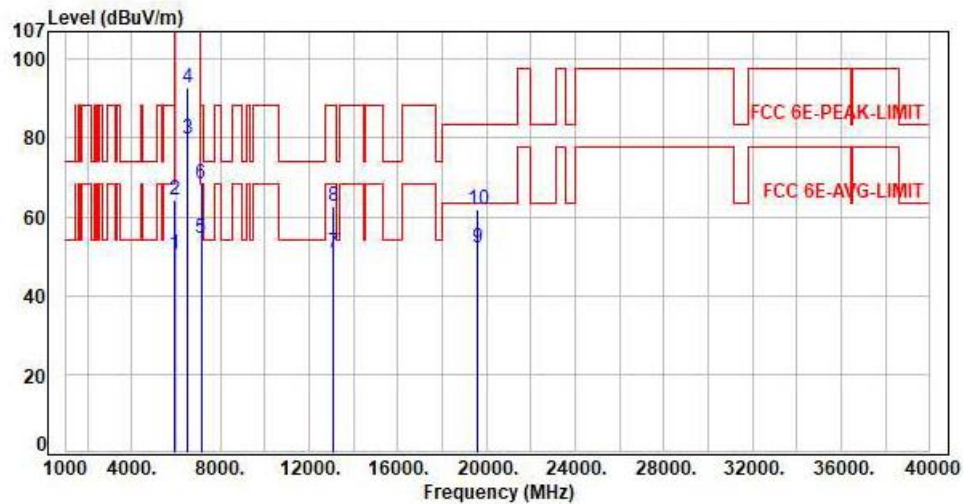

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.94	50.45	68.20	-17.75	Average	106	123	P
2	5925.00	7.51	56.71	64.22	88.20	-23.98	Peak	106	123	P
3	6535.00	9.90	69.79	79.69	200.00	-120.31	Average	106	123	P
4	6535.00	9.90	82.71	92.61	200.00	-107.39	Peak	106	123	P
5	7125.00	11.56	42.88	54.44	68.20	-13.76	Average	106	123	P
6	7125.00	11.56	56.77	68.33	88.20	-19.87	Peak	106	123	P
7	13070.00	19.57	31.20	50.77	68.20	-17.43	Average	100	125	P
8	13070.00	19.57	42.98	62.55	88.20	-25.65	Peak	100	125	P
9	19605.00	10.53	41.40	51.93	63.54	-11.61	Average	150	360	P
10	19605.00	10.53	51.30	61.83	83.54	-21.71	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

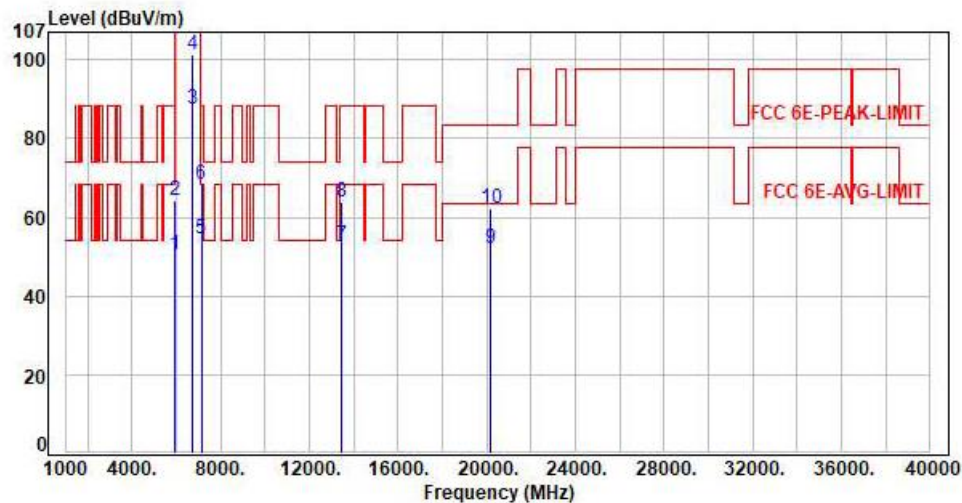

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.83	50.34	68.20	-17.86	Average	220	180	P
2	5925.00	7.51	56.67	64.18	88.20	-24.02	Peak	220	180	P
3	6715.00	10.64	76.64	87.28	200.00	-112.72	Average	220	180	P
4	6715.00	10.64	90.57	101.21	200.00	-98.79	Peak	220	180	P
5	7125.00	11.56	42.81	54.37	68.20	-13.83	Average	220	180	P
6	7125.00	11.56	56.84	68.40	88.20	-19.80	Peak	220	180	P
7	13430.00	21.22	31.47	52.69	68.20	-15.51	Average	100	58	P
8	13430.00	21.22	42.69	63.91	88.20	-24.29	Peak	100	58	P
9	20145.00	10.35	41.84	52.19	63.54	-11.35	Average	150	360	P
10	20145.00	10.35	51.90	62.25	83.54	-21.29	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

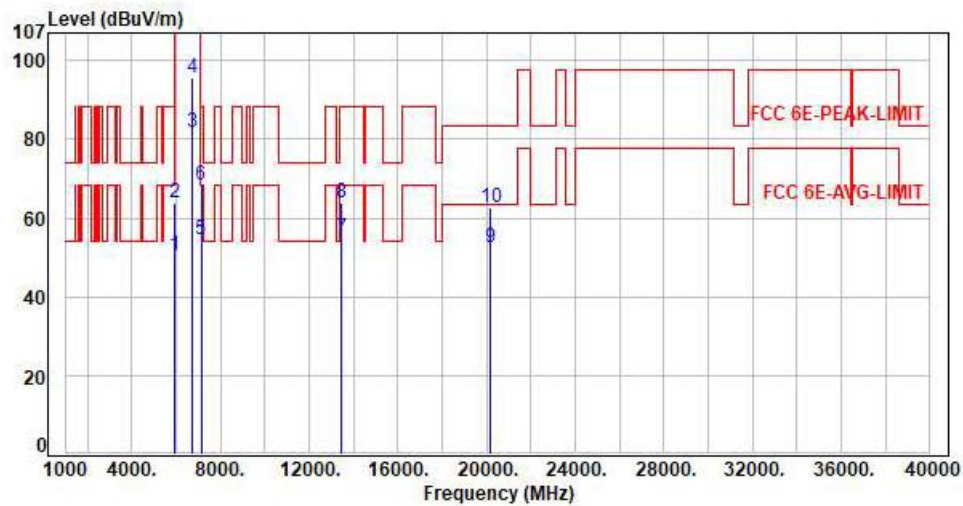

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.87	50.38	68.20	-17.82	Average	100	146	P
2	5925.00	7.51	56.27	63.78	88.20	-24.42	Peak	100	146	P
3	6715.00	10.64	71.18	81.82	200.00	-118.18	Average	100	146	P
4	6715.00	10.64	84.86	95.50	200.00	-104.50	Peak	100	146	P
5	7125.00	11.56	42.79	54.35	68.20	-13.85	Average	100	146	P
6	7125.00	11.56	56.82	68.38	88.20	-19.82	Peak	100	146	P
7	13430.00	21.22	33.78	55.00	68.20	-13.20	Average	100	124	P
8	13430.00	21.22	42.57	63.79	88.20	-24.41	Peak	100	124	P
9	20145.00	10.35	41.97	52.32	63.54	-11.22	Average	150	360	P
10	20145.00	10.35	52.12	62.47	83.54	-21.07	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

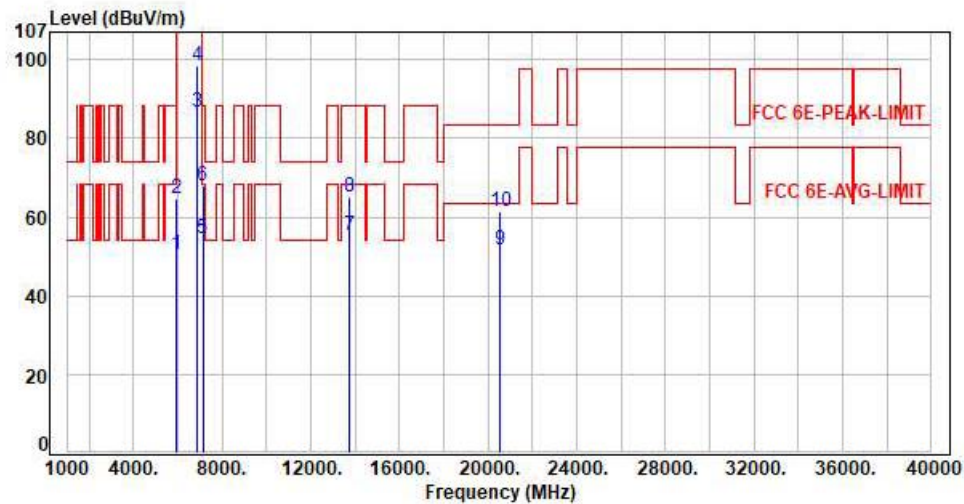

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.86	50.37	68.20	-17.83	Average	186	165	P
2	5925.00	7.51	57.27	64.78	88.20	-23.42	Peak	186	165	P
3	6855.00	11.02	75.62	86.64	200.00	-113.36	Average	186	165	P
4	6855.00	11.02	87.40	98.42	200.00	-101.58	Peak	186	165	P
5	7125.00	11.56	42.88	54.44	68.20	-13.76	Average	186	165	P
6	7125.00	11.56	56.52	68.08	88.20	-20.12	Peak	186	165	P
7	13710.00	22.30	32.86	55.16	68.20	-13.04	Average	100	56	P
8	13710.00	22.30	42.84	65.14	88.20	-23.06	Peak	100	56	P
9	20565.00	9.99	41.56	51.55	63.54	-11.99	Average	150	360	P
10	20565.00	9.99	51.33	61.32	83.54	-22.22	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

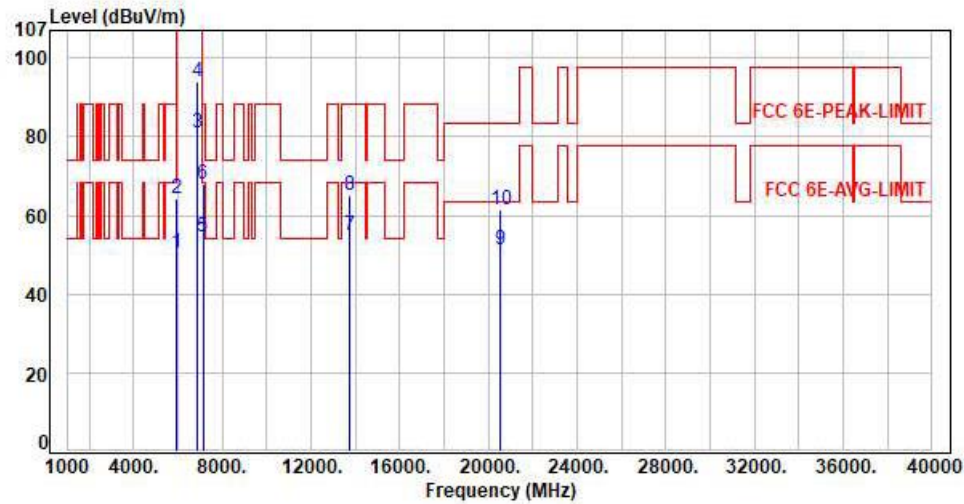

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.91	50.42	68.20	-17.78	Average	100	210	P
2	5925.00	7.51	56.85	64.36	88.20	-23.84	Peak	100	210	P
3	6855.00	11.02	69.94	80.96	200.00	-119.04	Average	100	210	P
4	6855.00	11.02	82.96	93.98	200.00	-106.02	Peak	100	210	P
5	7125.00	11.56	42.85	54.41	68.20	-13.79	Average	100	210	P
6	7125.00	11.56	56.30	67.86	88.20	-20.34	Peak	100	210	P
7	13710.00	22.30	32.72	55.02	68.20	-13.18	Average	100	129	P
8	13710.00	22.30	42.76	65.06	88.20	-23.14	Peak	100	129	P
9	20565.00	9.99	41.34	51.33	63.54	-12.21	Average	150	360	P
10	20565.00	9.99	51.60	61.59	83.54	-21.95	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

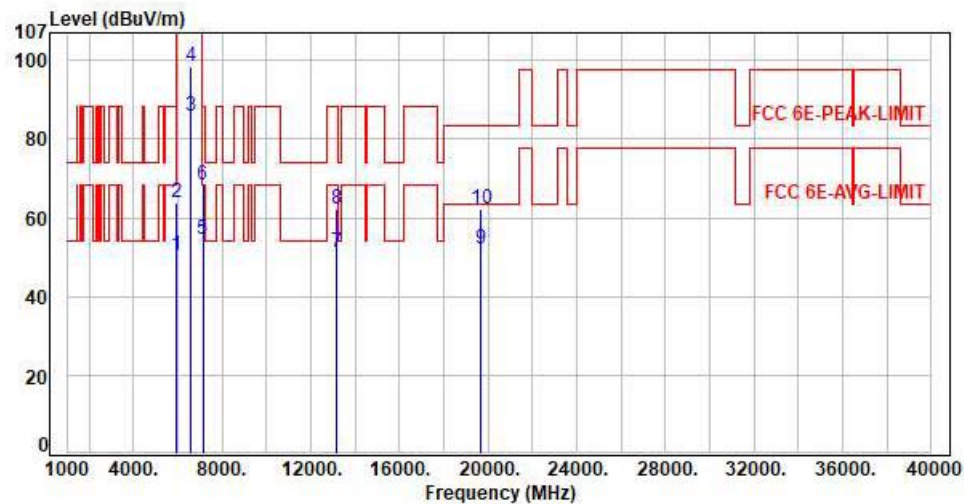

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.93	50.44	68.20	-17.76	Average	173	178	P
2	5925.00	7.51	56.37	63.88	88.20	-24.32	Peak	173	178	P
3	6565.00	10.04	75.90	85.94	200.00	-114.06	Average	173	178	P
4	6565.00	10.04	88.50	98.54	200.00	-101.46	Peak	173	178	P
5	7125.00	11.56	42.92	54.48	68.20	-13.72	Average	173	178	P
6	7125.00	11.56	56.65	68.21	88.20	-19.99	Peak	173	178	P
7	13130.00	19.85	31.49	51.34	68.20	-16.86	Average	100	57	P
8	13130.00	19.85	42.44	62.29	88.20	-25.91	Peak	100	57	P
9	19695.00	10.48	41.76	52.24	63.54	-11.30	Average	150	360	P
10	19695.00	10.48	51.66	62.14	83.54	-21.40	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

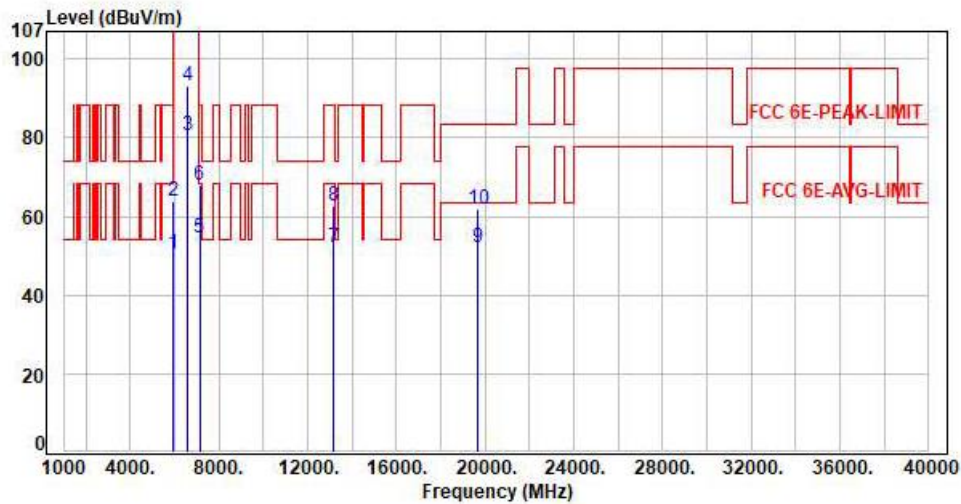

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	43.01	50.52	68.20	-17.68	Average	100	125	P
2	5925.00	7.51	56.42	63.93	88.20	-24.27	Peak	100	125	P
3	6565.00	10.04	70.43	80.47	200.00	-119.53	Average	100	125	P
4	6565.00	10.04	83.25	93.29	200.00	-106.71	Peak	100	125	P
5	7125.00	11.56	42.99	54.55	68.20	-13.65	Average	100	125	P
6	7125.00	11.56	56.59	68.15	88.20	-20.05	Peak	100	125	P
7	13130.00	19.85	32.41	52.26	68.20	-15.94	Average	100	126	P
8	13130.00	19.85	42.77	62.62	88.20	-25.58	Peak	100	126	P
9	19695.00	10.48	41.58	52.06	63.54	-11.48	Average	150	360	P
10	19695.00	10.48	51.38	61.86	83.54	-21.68	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

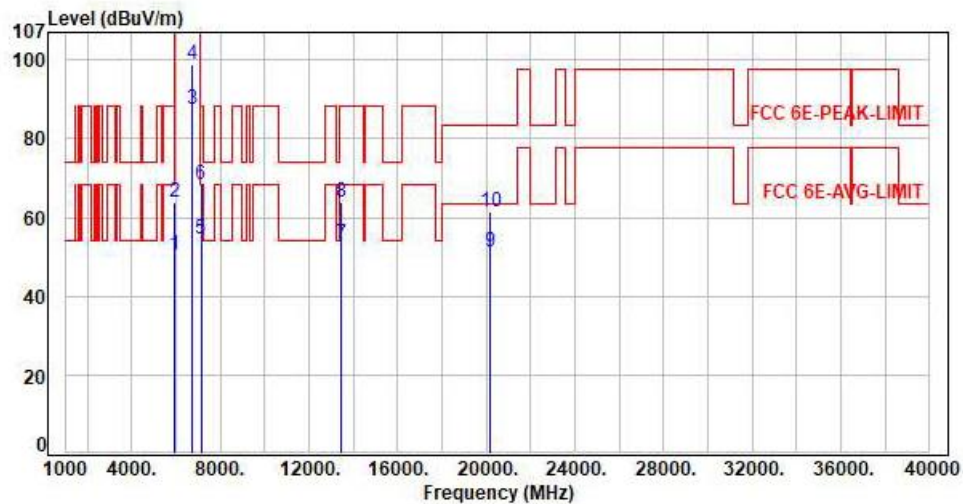

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.51	42.97	50.48	68.20	-17.72	Average	147	180	P
2	5925.00	7.51	56.26	63.77	88.20	-24.43	Peak	147	180	P
3	6725.00	10.67	76.95	87.62	200.00	-112.38	Average	147	180	P
4	6725.00	10.67	88.26	98.93	200.00	-101.07	Peak	147	180	P
5	7125.00	11.56	42.88	54.44	68.20	-13.76	Average	147	180	P
6	7125.00	11.56	56.76	68.32	88.20	-19.88	Peak	147	180	P
7	13450.00	21.26	32.10	53.36	68.20	-14.84	Average	100	57	P
8	13450.00	21.26	42.64	63.90	88.20	-24.30	Peak	100	57	P
9	20175.00	10.27	41.19	51.46	63.54	-12.08	Average	150	360	P
10	20175.00	10.27	51.25	61.52	83.54	-22.02	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor