





Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Pol : Vertical Detector : Peak

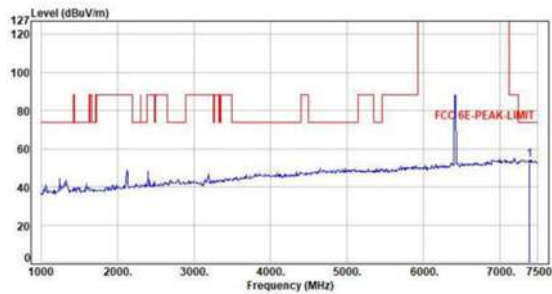

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7389.50	3.99	50.17	54.16	74.00	-19.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Pol : Vertical Detector : Average

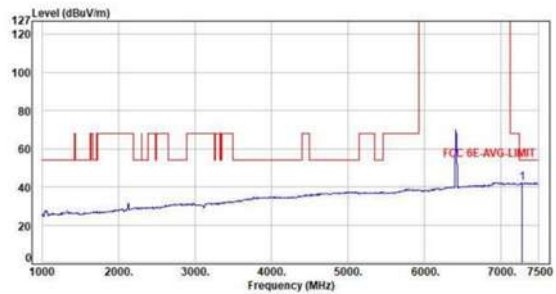

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7285.50	4.05	38.15	42.20	54.00	-11.80	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Pol : Horizontal Detector : Peak

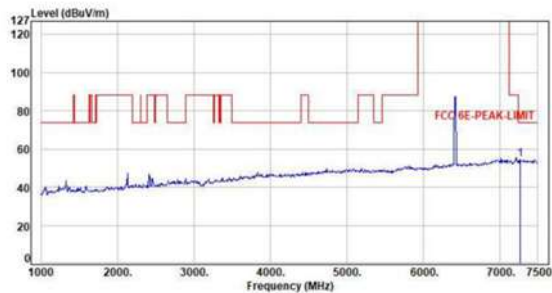

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7266.00	3.98	50.50	54.48	74.00	-19.52	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Pol : Horizontal Detector : Average

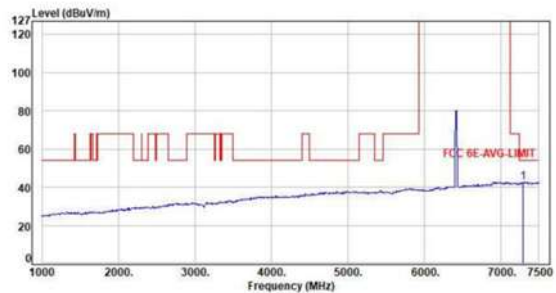


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	38.43	42.52	54.00	-11.48	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Pol : Vertical Detector : Peak

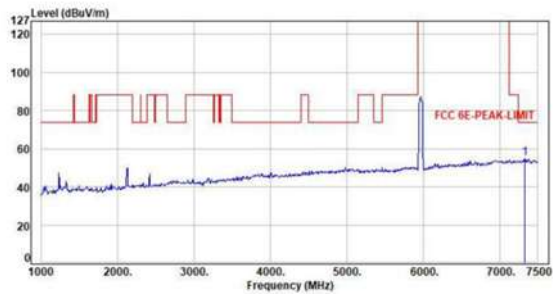

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	50.72	54.82	74.00	-19.18	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Pol : Vertical Detector : Average

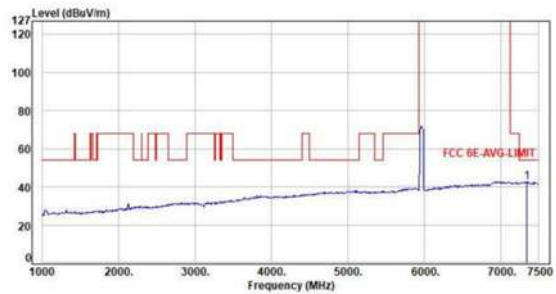

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.55	42.64	54.00	-11.36	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Pol : Horizontal Detector : Peak

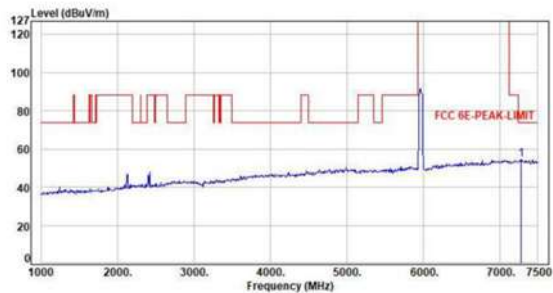

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7285.50	4.05	50.47	54.52	74.00	-19.48	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Pol : Horizontal Detector : Average

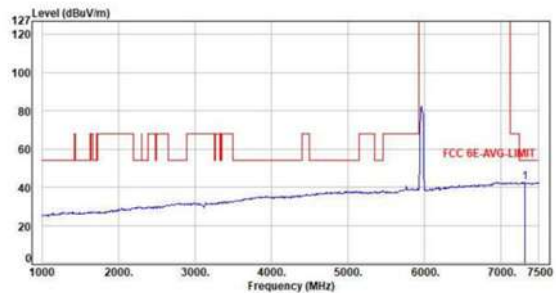


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.35	42.46	54.00	-11.54	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Pol : Vertical Detector : Peak

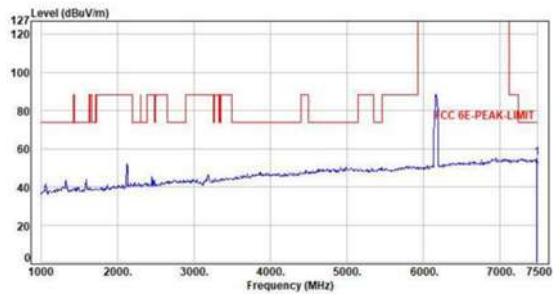

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7480.50	4.02	50.83	54.85	74.00	-19.15	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Pol : Vertical Detector : Average

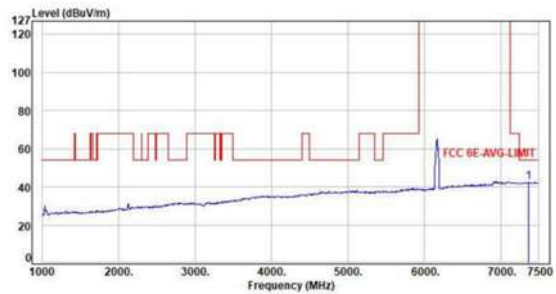

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	38.30	42.34	54.00	-11.66	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Pol : Horizontal Detector : Peak

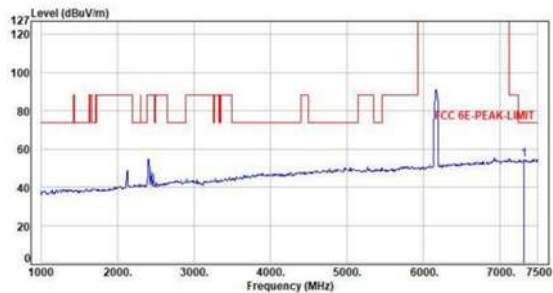

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	50.27	54.37	74.00	-19.63	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Pol : Horizontal Detector : Average

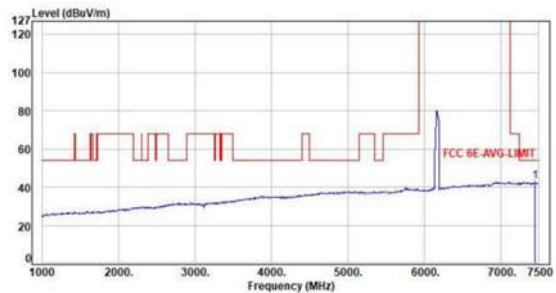


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	38.71	42.84	54.00	-11.16	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Pol : Vertical Detector : Peak

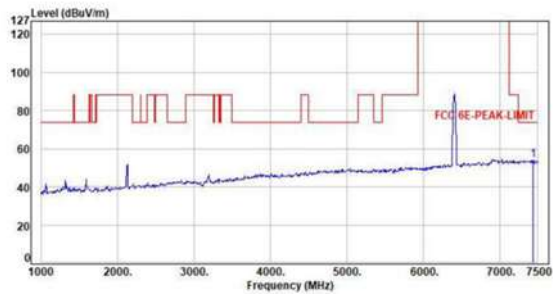

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7435.00	4.10	50.06	54.16	74.00	-19.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Pol : Vertical Detector : Average

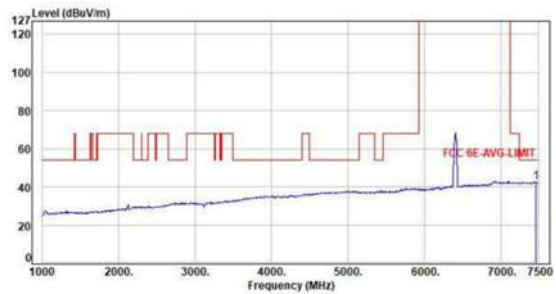

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.53	42.64	54.00	-11.36	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Pol : Horizontal Detector : Peak

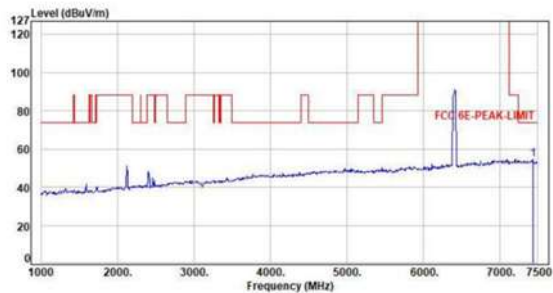

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7435.00	4.10	50.35	54.45	74.00	-19.55	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Pol : Horizontal Detector : Average

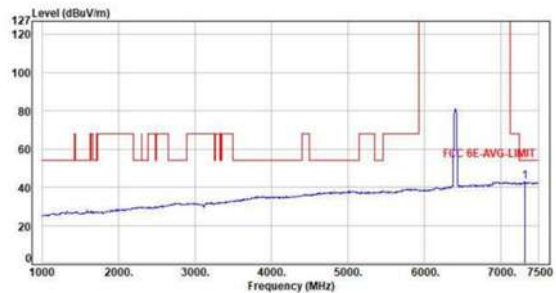


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.86	42.97	54.00	-11.03	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Pol : Vertical Detector : Peak

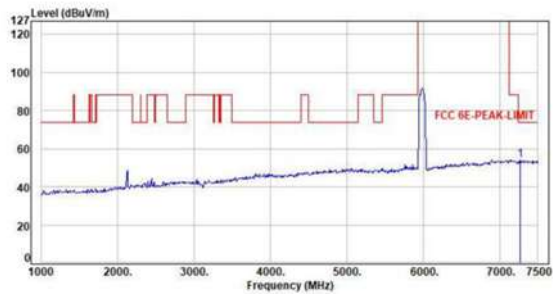

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7266.00	3.98	50.02	54.00	74.00	-20.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Pol : Vertical Detector : Average

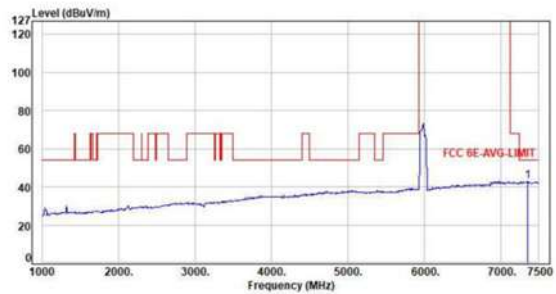

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	38.68	42.75	54.00	-11.25	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Pol : Horizontal Detector : Peak

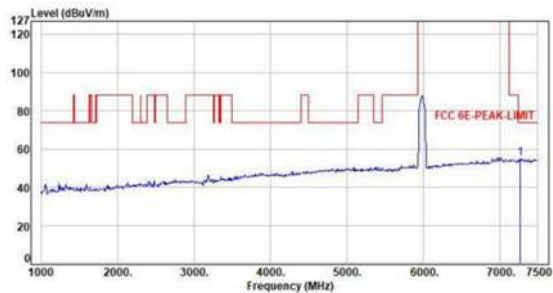

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7272.50	4.01	51.02	55.03	74.00	-18.97	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Pol : Horizontal Detector : Average

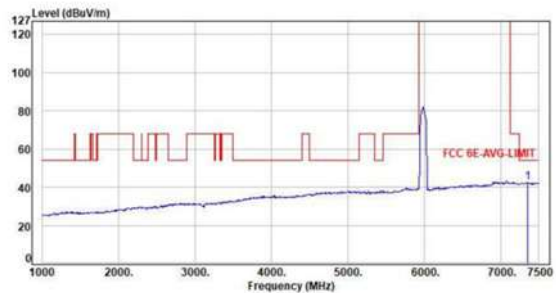


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	38.30	42.39	54.00	-11.61	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Pol : Vertical Detector : Peak

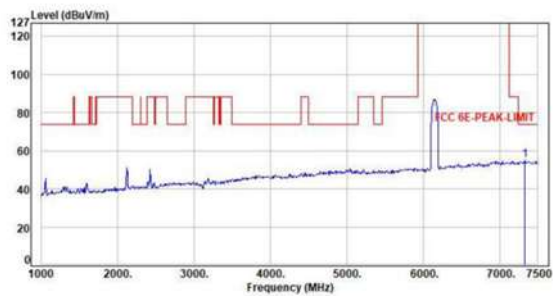

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	51.14	55.24	74.00	-18.76	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Pol : Vertical Detector : Average

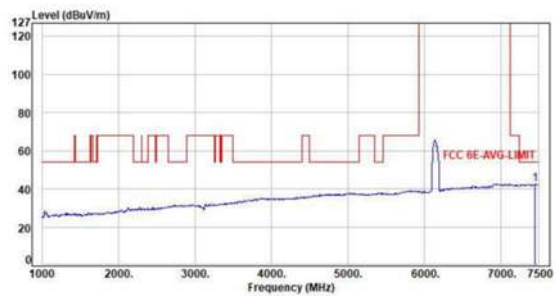

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	38.33	42.46	54.00	-11.54	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Pol : Horizontal Detector : Peak

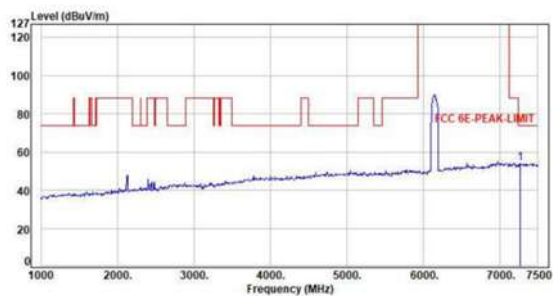

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7266.00	3.98	50.07	54.05	74.00	-19.95	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Pol : Horizontal Detector : Average

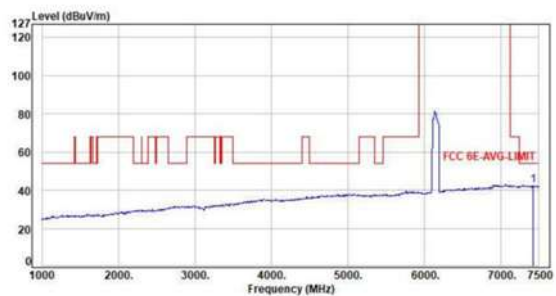


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7422.00	4.05	38.54	42.59	54.00	-11.41	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Pol : Vertical Detector : Peak

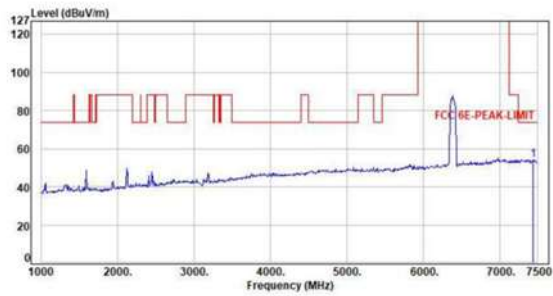

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7441.50	4.12	50.13	54.25	74.00	-19.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Pol : Vertical Detector : Average

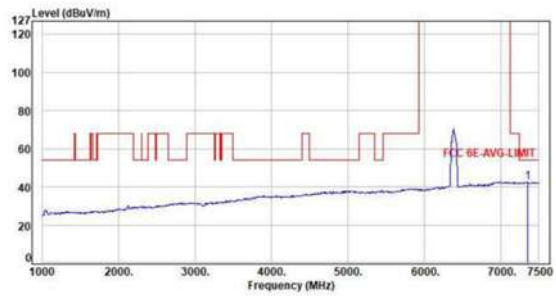

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	38.43	42.50	54.00	-11.50	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Pol : Horizontal Detector : Peak

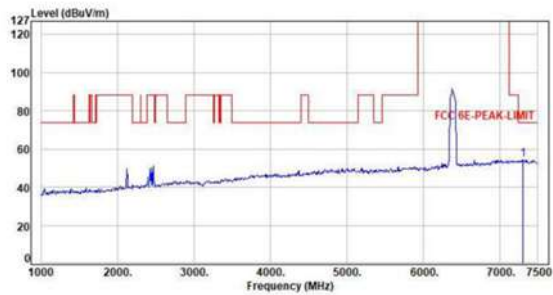

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	50.54	54.65	74.00	-19.35	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Pol : Horizontal Detector : Average

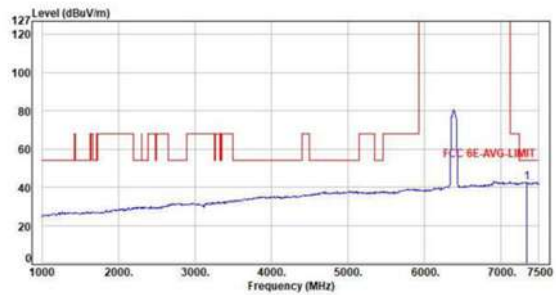


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.53	42.62	54.00	-11.38	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Pol : Vertical Detector : Peak

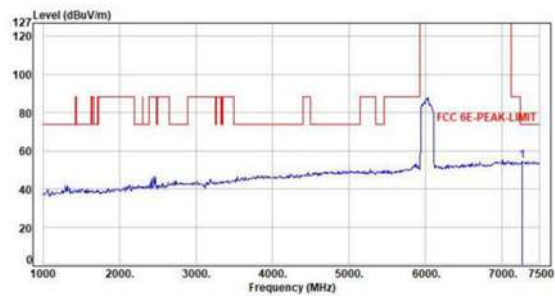

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7272.50	4.01	50.54	54.55	74.00	-19.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Pol : Horizontal Detector : Peak

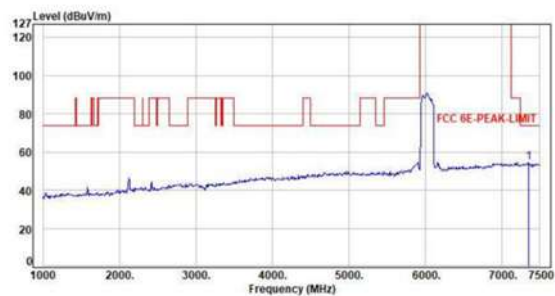


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	50.40	54.49	74.00	-19.51	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Pol : Vertical Detector : Peak

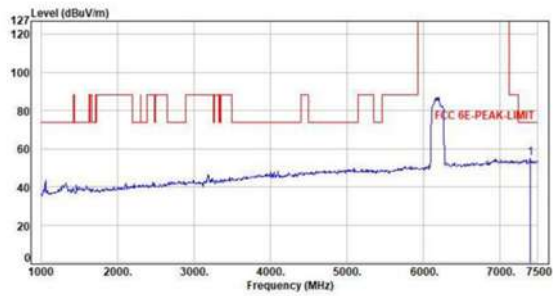

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7396.00	3.98	50.97	54.95	74.00	-19.05	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Pol : Vertical Detector : Average

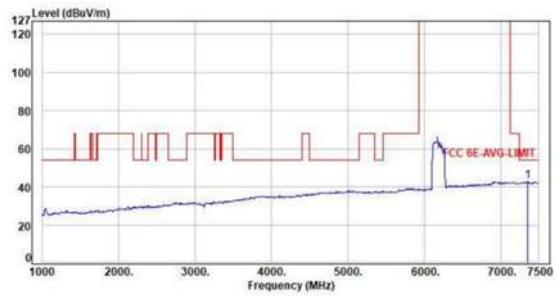

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	38.68	42.75	54.00	-11.25	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Pol : Horizontal Detector : Peak

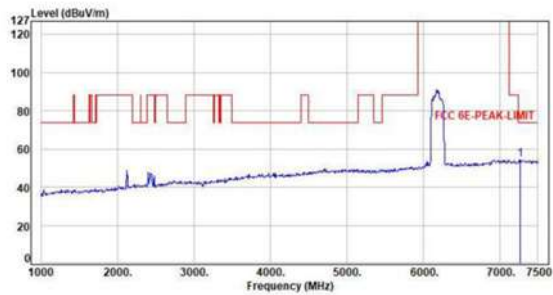

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7266.00	3.98	50.68	54.66	74.00	-19.34	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Pol : Horizontal Detector : Average

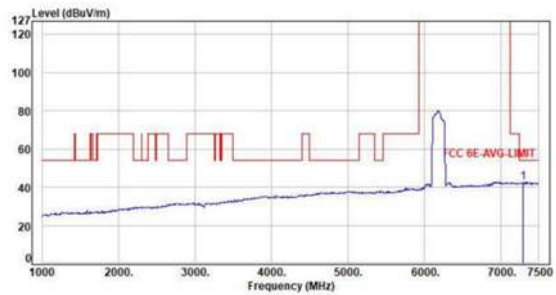


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	38.44	42.53	54.00	-11.47	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Pol : Vertical Detector : Peak

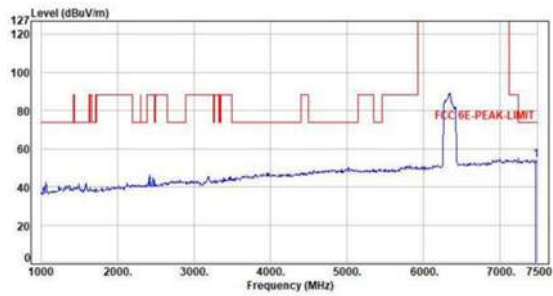

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	50.23	54.27	74.00	-19.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Pol : Vertical Detector : Average

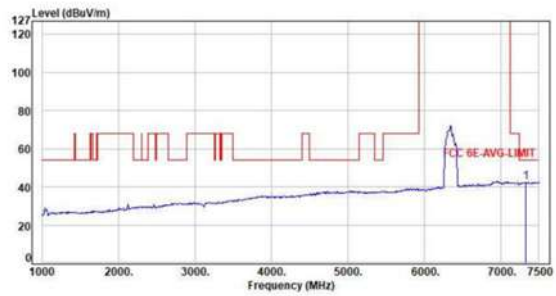

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	38.24	42.34	54.00	-11.66	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Pol : Horizontal Detector : Peak

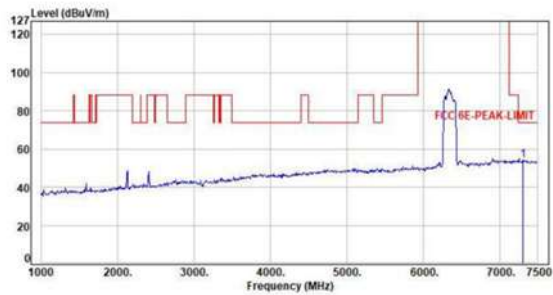

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	49.82	53.93	74.00	-20.07	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Pol : Horizontal Detector : Average

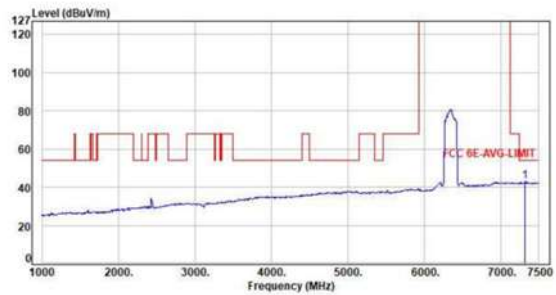


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	39.08	43.18	54.00	-10.82	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160CH15 NSS1 MCS0
Pol : Vertical Detector : Average

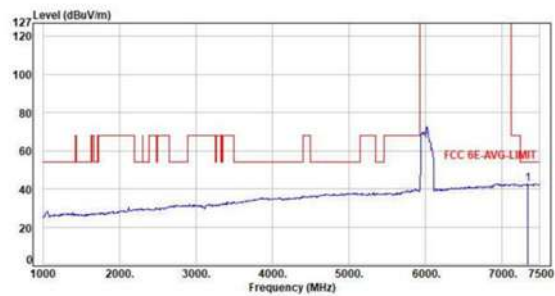

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.58	42.67	54.00	-11.33	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160CH15 NSS1 MCS0
Pol : Horizontal Detector : Average

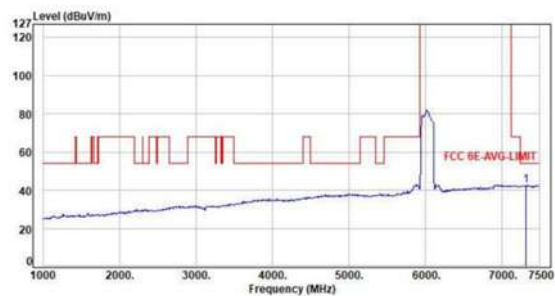


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.58	42.69	54.00	-11.31	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Pol : Vertical Detector : Peak

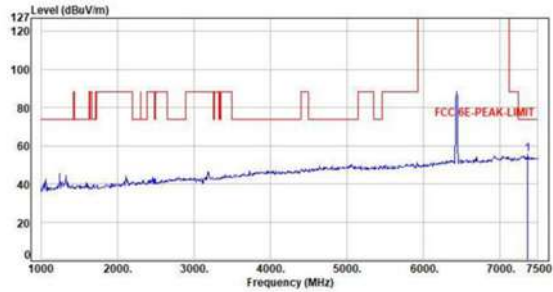

Frequency No. (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1 7370.00	4.04	51.44	55.48	74.00	-18.52	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Pol : Vertical Detector : Average

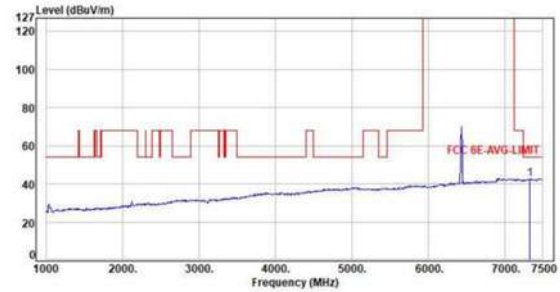

Frequency No. (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1 7331.00	4.10	38.57	42.67	54.00	-11.33	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Pol : Horizontal Detector : Peak

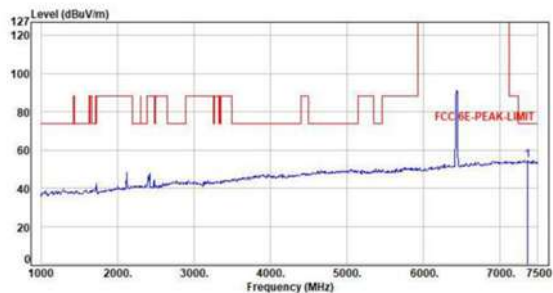

Frequency No. (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1 7370.00	4.04	50.61	54.65	74.00	-19.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Pol : Horizontal Detector : Average

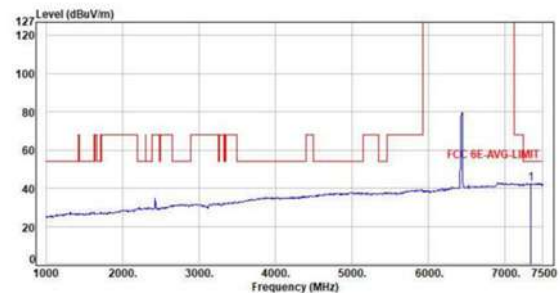


Frequency No. (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1 7337.50	4.09	38.37	42.46	54.00	-11.54	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Pol : Vertical Detector : Peak

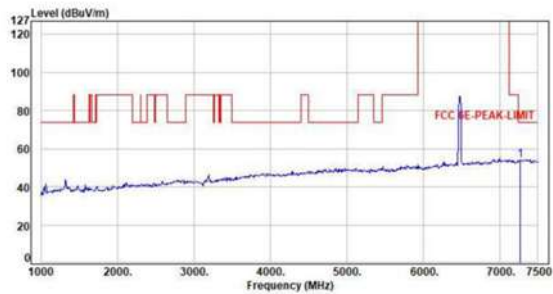

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7272.50	4.01	50.05	54.06	74.00	-19.94	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Pol : Vertical Detector : Average

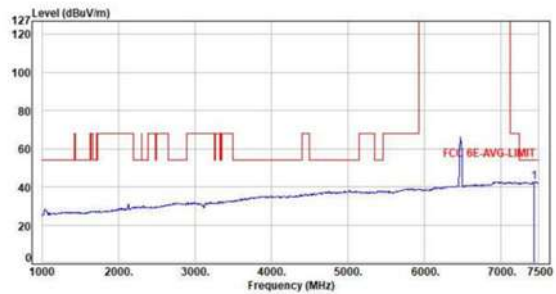

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7441.50	4.12	38.37	42.49	54.00	-11.51	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Pol : Horizontal Detector : Peak

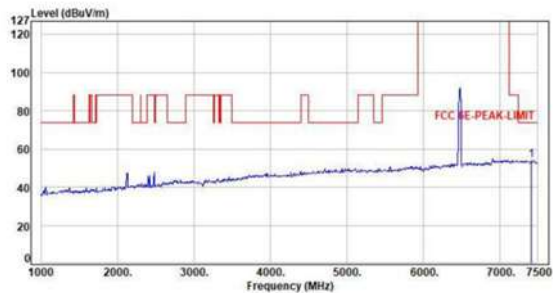

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7415.50	4.02	50.29	54.31	74.00	-19.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Pol : Horizontal Detector : Average

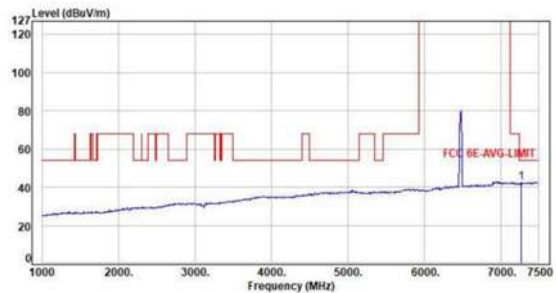


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7272.50	4.01	38.53	42.54	54.00	-11.46	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Pol : Vertical Detector : Peak

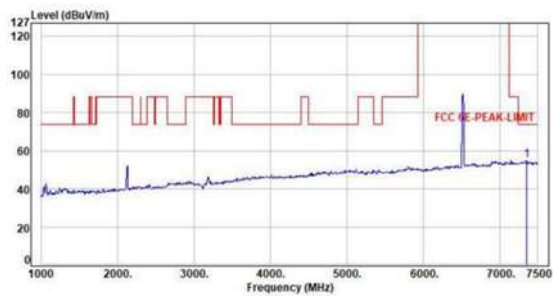

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	51.22	55.29	74.00	-18.71	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Pol : Vertical Detector : Average

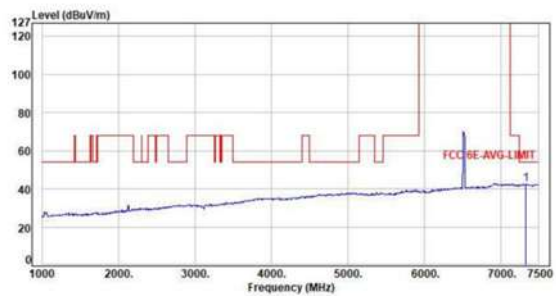

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	38.49	42.59	54.00	-11.41	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Pol : Horizontal Detector : Peak

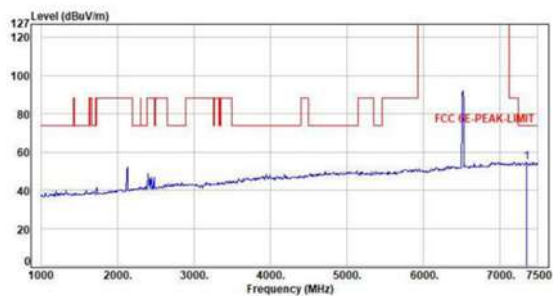

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	50.71	54.80	74.00	-19.20	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Pol : Horizontal Detector : Average

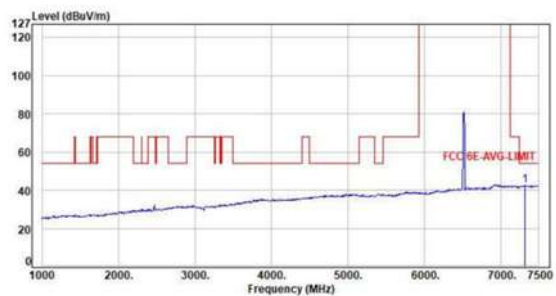


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	38.61	42.71	54.00	-11.29	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Pol : Vertical Detector : Peak

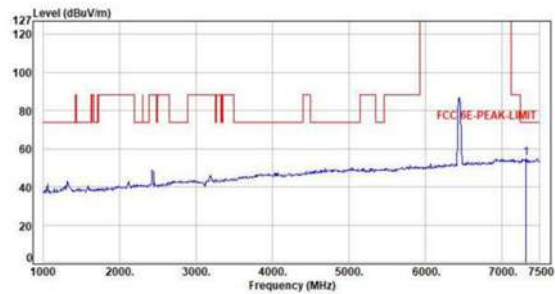

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	50.72	54.82	74.00	-19.18	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Pol : Vertical Detector : Average

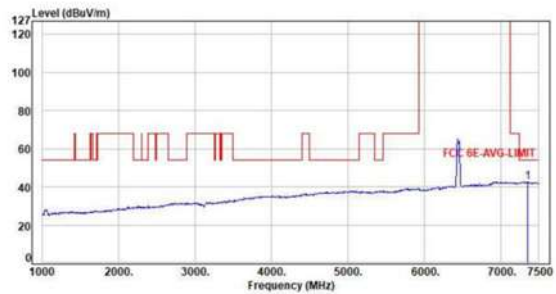

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	38.41	42.48	54.00	-11.52	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Pol : Horizontal Detector : Peak

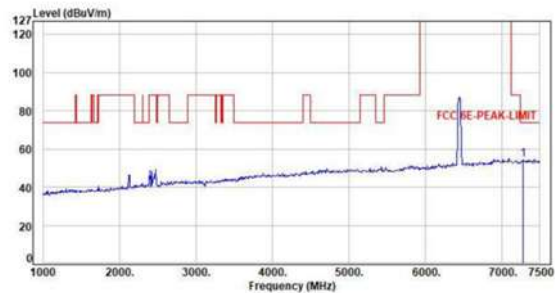

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7285.50	4.05	50.47	54.52	74.00	-19.48	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Pol : Horizontal Detector : Average

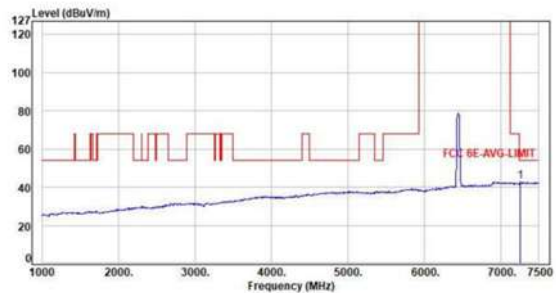


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7253.00	3.94	38.93	42.87	54.00	-11.13	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Pol : Vertical Detector : Peak

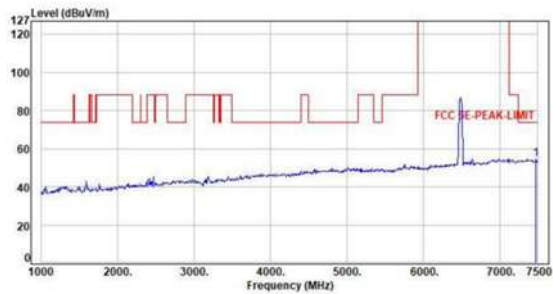

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	50.41	54.45	74.00	-19.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Pol : Vertical Detector : Average

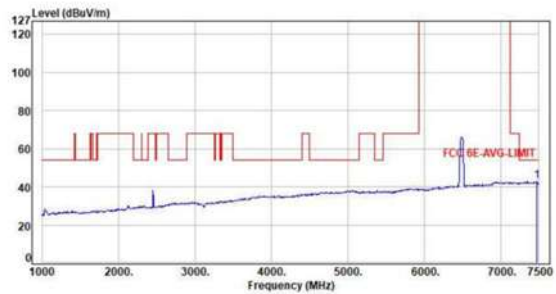

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	38.85	42.89	54.00	-11.11	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Pol : Horizontal Detector : Peak

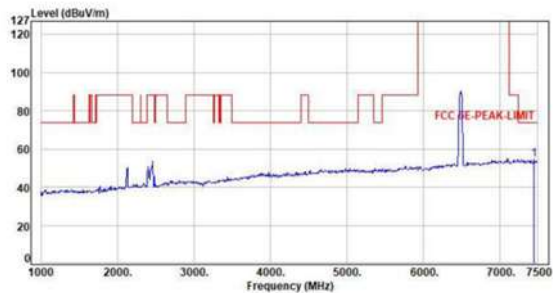

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.25	54.38	74.00	-19.62	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Pol : Horizontal Detector : Average

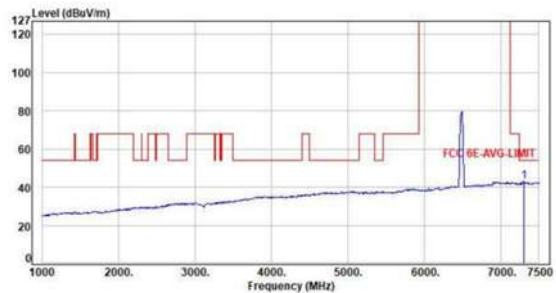


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	38.86	42.97	54.00	-11.03	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Pol : Vertical Detector : Peak

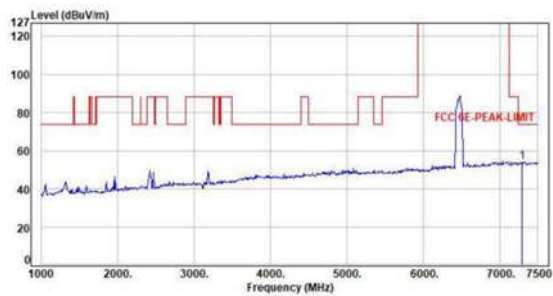

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	50.20	54.29	74.00	-19.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Pol : Vertical Detector : Average

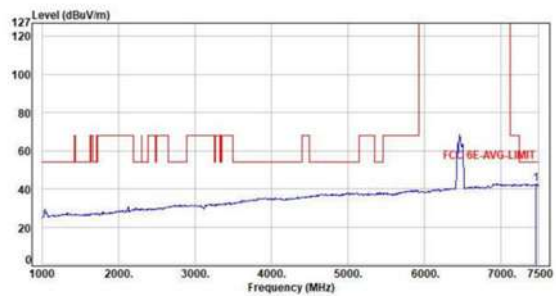

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.49	42.60	54.00	-11.40	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Pol : Horizontal Detector : Peak

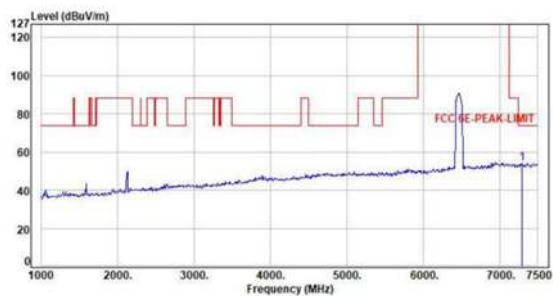

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	49.91	54.00	74.00	-20.00	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Pol : Horizontal Detector : Average

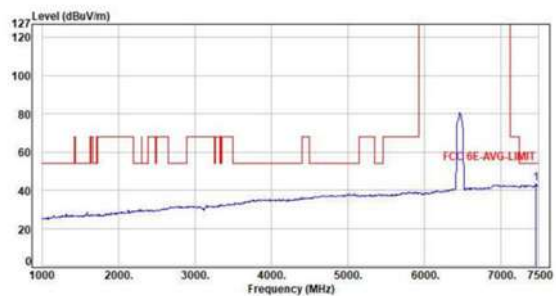


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	39.47	43.58	54.00	-10.42	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Pol : Vertical Detector : Peak

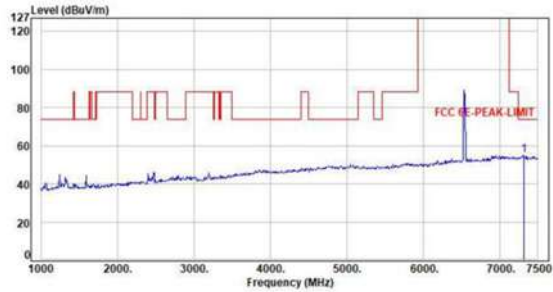

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	50.84	54.95	74.00	-19.05	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Pol : Vertical Detector : Average

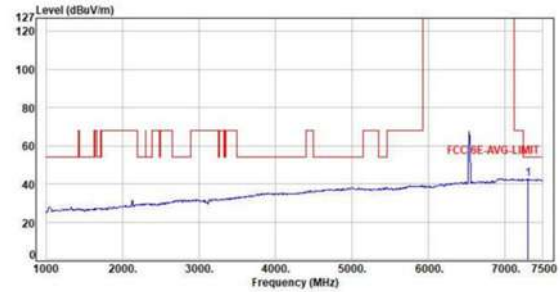

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	38.41	42.52	54.00	-11.48	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Pol : Horizontal Detector : Peak

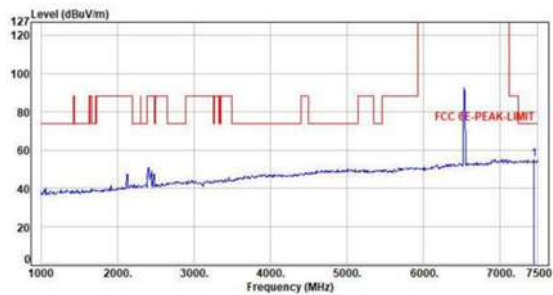

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.84	54.97	74.00	-19.03	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Pol : Horizontal Detector : Average

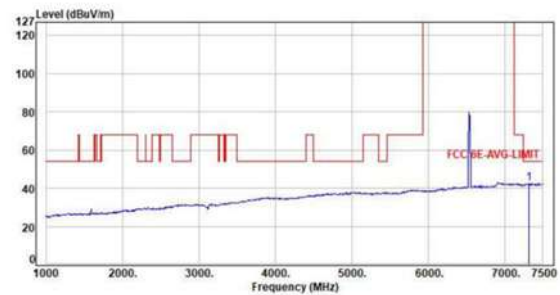


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.37	42.48	54.00	-11.52	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Pol : Vertical Detector : Peak

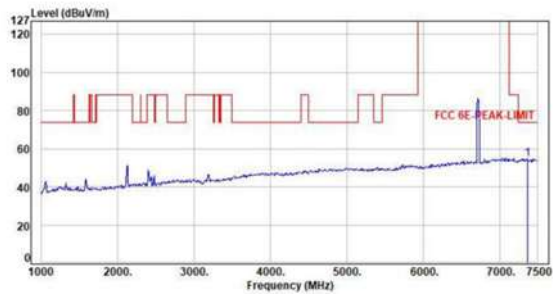

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	50.52	54.56	74.00	-19.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Pol : Vertical Detector : Average

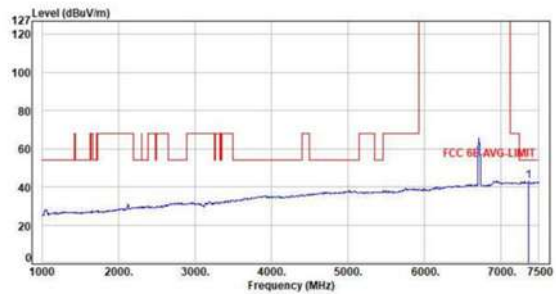

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	38.82	42.86	54.00	-11.14	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Pol : Horizontal Detector : Peak

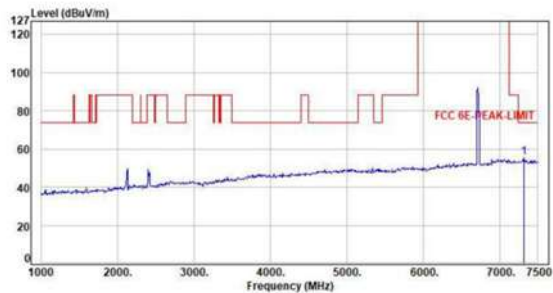

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	51.50	55.61	74.00	-18.39	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Pol : Horizontal Detector : Average

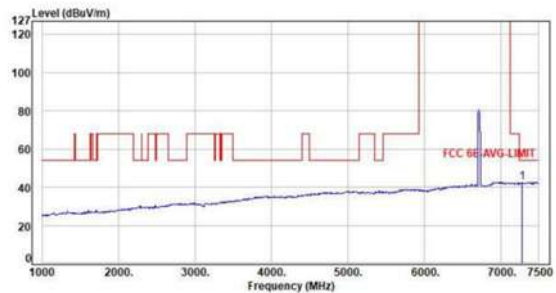


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7285.50	4.05	38.61	42.66	54.00	-11.34	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Pol : Vertical Detector : Peak

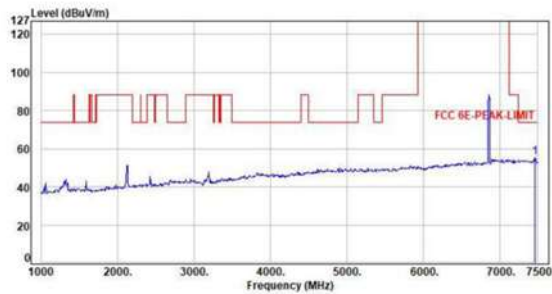

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	51.33	55.44	74.00	-18.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Pol : Vertical Detector : Average

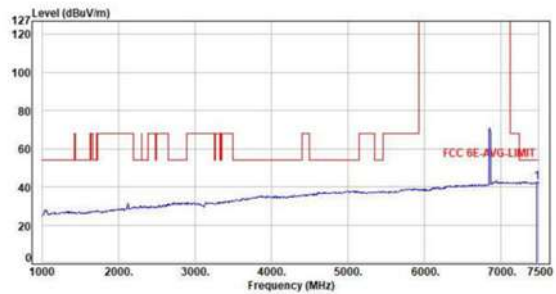

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	38.62	42.66	54.00	-11.34	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Pol : Horizontal Detector : Peak

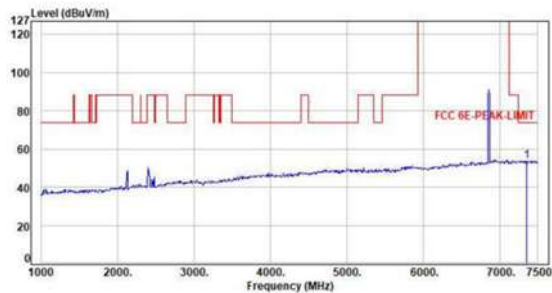

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	49.65	53.72	74.00	-20.28	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Pol : Horizontal Detector : Average

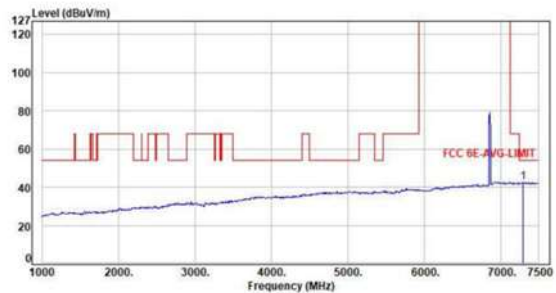


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	38.48	42.57	54.00	-11.43	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Pol : Vertical Detector : Peak

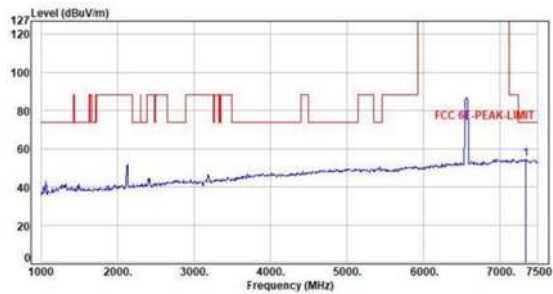

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	50.63	54.72	74.00	-19.28	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Pol : Vertical Detector : Average

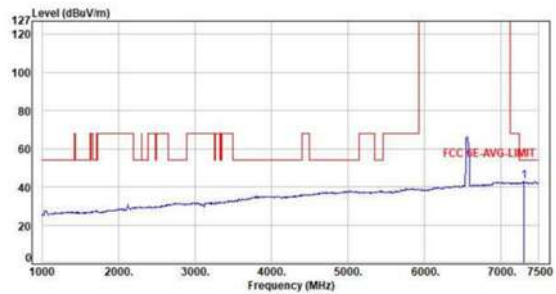

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	38.83	42.94	54.00	-11.06	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Pol : Horizontal Detector : Peak

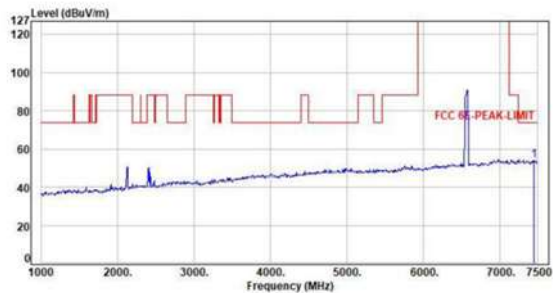

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.04	54.17	74.00	-19.83	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Pol : Horizontal Detector : Average

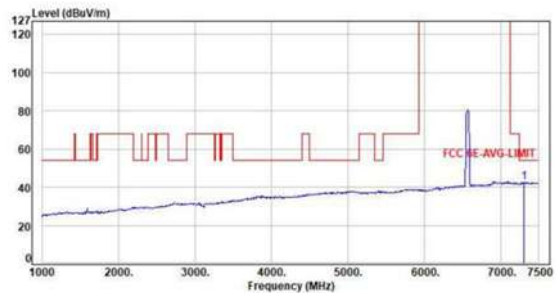


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	38.47	42.58	54.00	-11.42	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Pol : Vertical Detector : Peak

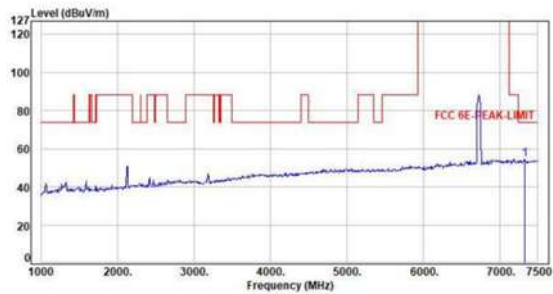

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	50.38	54.48	74.00	-19.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Pol : Vertical Detector : Average

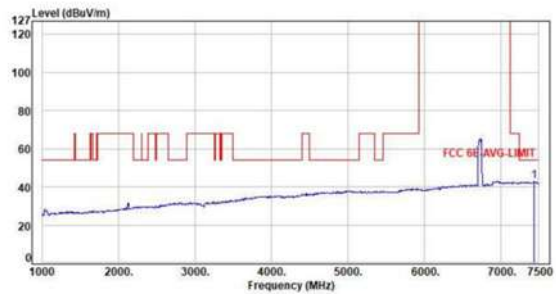

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7435.00	4.10	38.67	42.77	54.00	-11.23	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Pol : Horizontal Detector : Peak

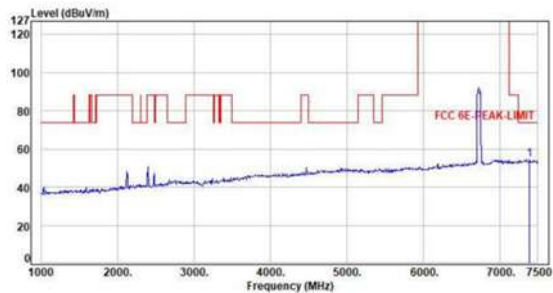

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7389.50	3.99	50.52	54.51	74.00	-19.49	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Pol : Horizontal Detector : Average

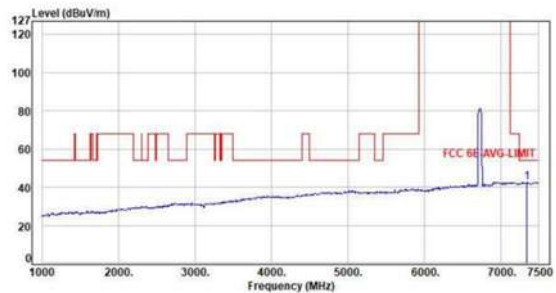


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.40	42.49	54.00	-11.51	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Pol : Vertical Detector : Peak

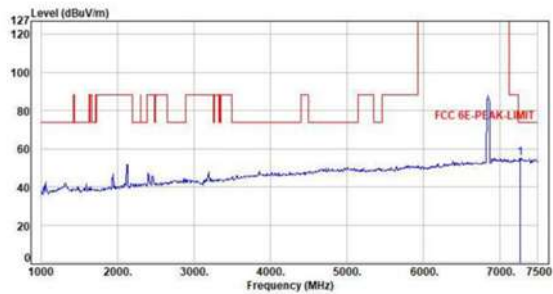

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7266.00	3.98	50.92	54.90	74.00	-19.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Pol : Vertical Detector : Average

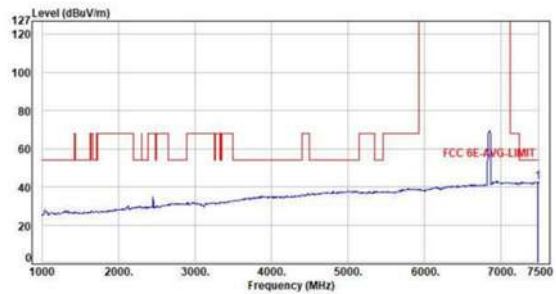

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7488.50	4.02	38.71	42.73	54.00	-11.27	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Pol : Horizontal Detector : Peak

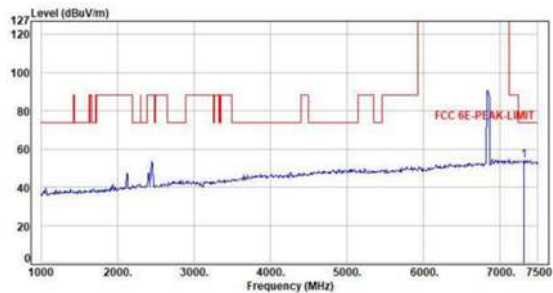

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	50.00	54.10	74.00	-19.90	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Pol : Horizontal Detector : Average

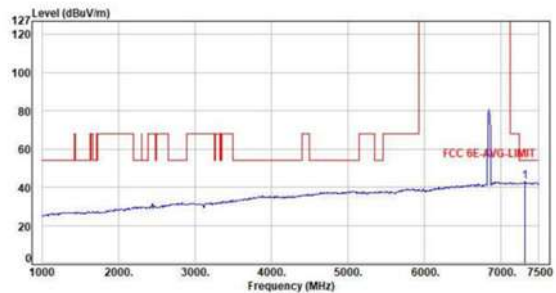


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	38.70	42.80	54.00	-11.20	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Pol : Vertical Detector : Peak

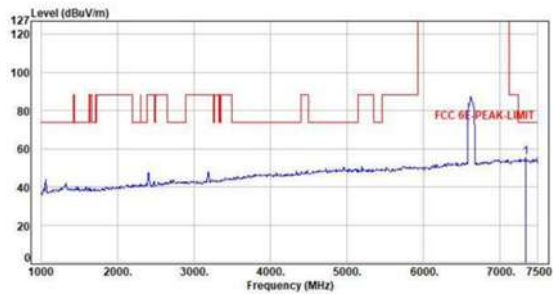

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	51.46	55.55	74.00	-18.45	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Pol : Vertical Detector : Average

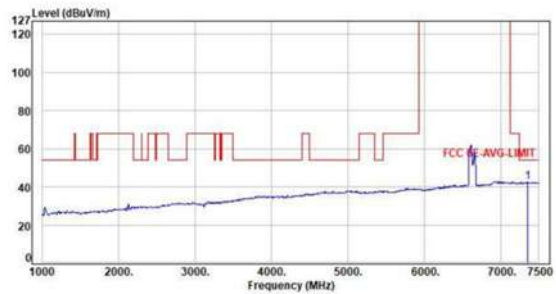

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	38.34	42.43	54.00	-11.57	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Pol : Horizontal Detector : Peak

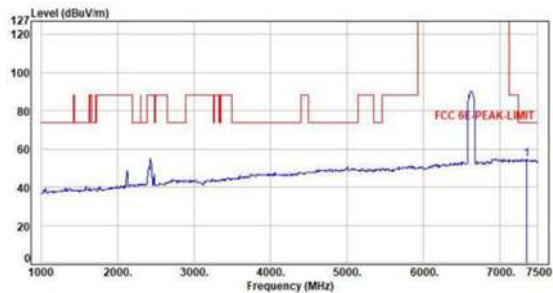

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	50.71	54.80	74.00	-19.20	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Pol : Horizontal Detector : Average

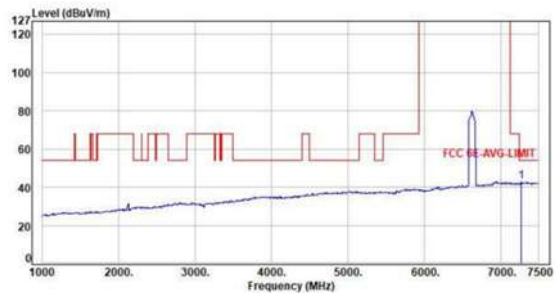


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7272.50	4.01	38.82	42.83	54.00	-11.17	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Pol : Vertical Detector : Peak

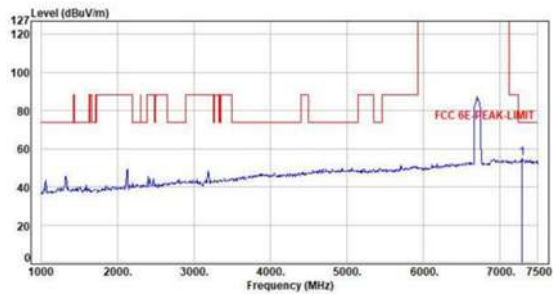

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	50.76	54.85	74.00	-19.15	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Pol : Vertical Detector : Average

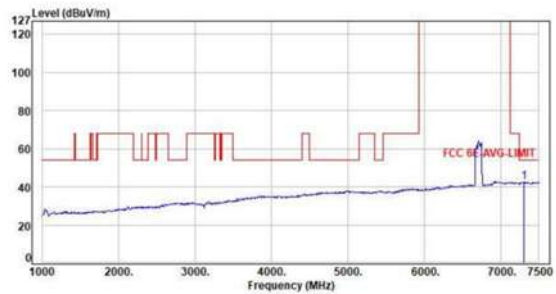

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	38.54	42.65	54.00	-11.35	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Pol : Horizontal Detector : Peak

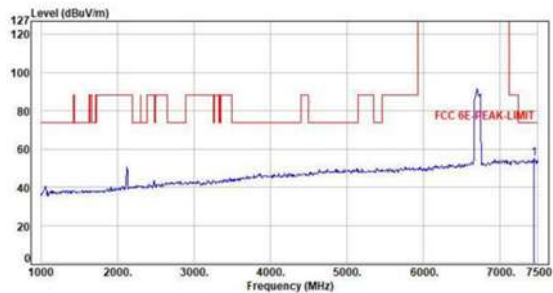

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.85	54.98	74.00	-19.02	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Pol : Horizontal Detector : Average

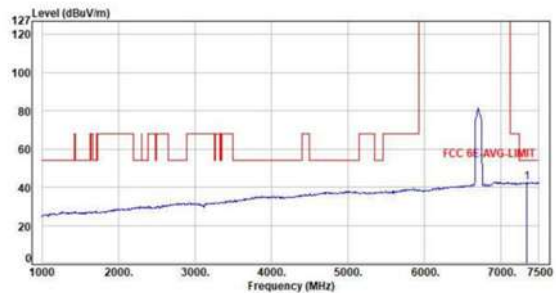


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.38	42.47	54.00	-11.53	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Pol : Vertical Detector : Peak

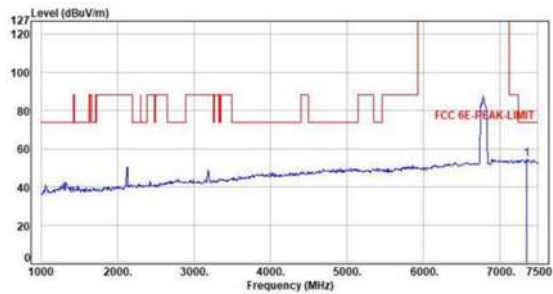

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	50.28	54.35	74.00	-19.65	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Pol : Vertical Detector : Average

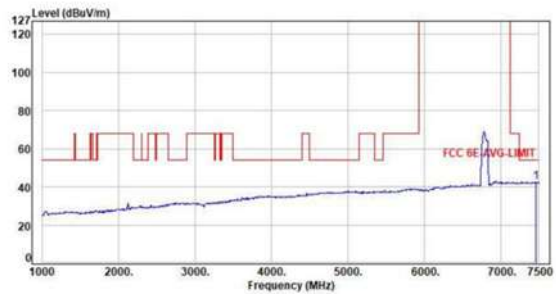

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.29	42.40	54.00	-11.60	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Pol : Horizontal Detector : Peak

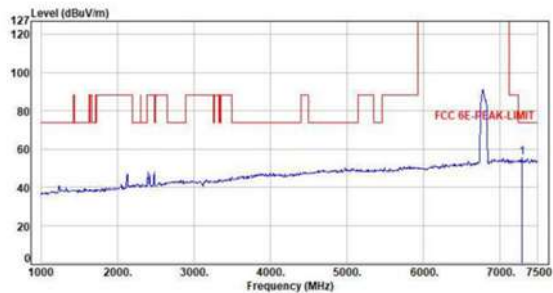

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	51.34	55.43	74.00	-18.57	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Pol : Horizontal Detector : Average

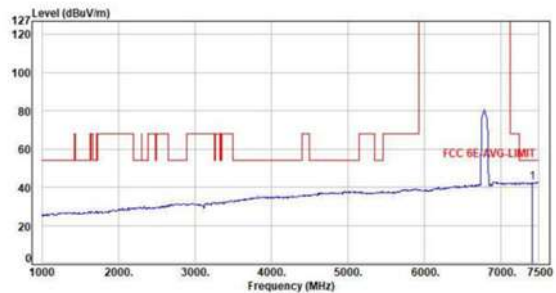


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7409.00	4.01	38.48	42.49	54.00	-11.51	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Pol : Vertical Detector : Peak

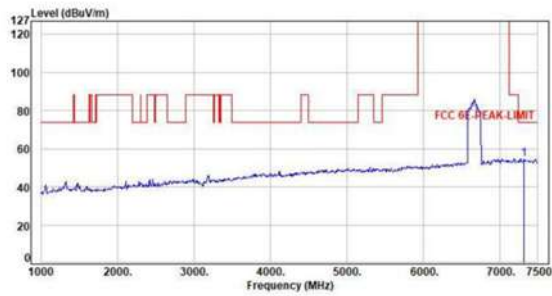

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	50.53	54.63	74.00	-19.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Pol : Horizontal Detector : Peak

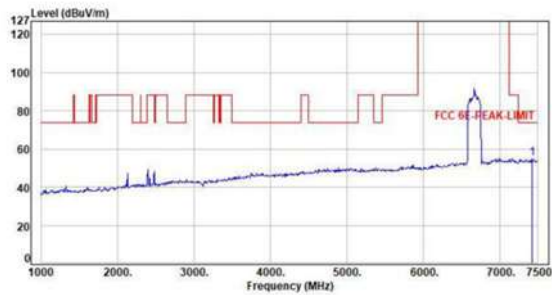


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7422.00	4.05	50.93	54.98	74.00	-19.02	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160CH143 NSS1 MCS0
Pol : Vertical Detector : Average

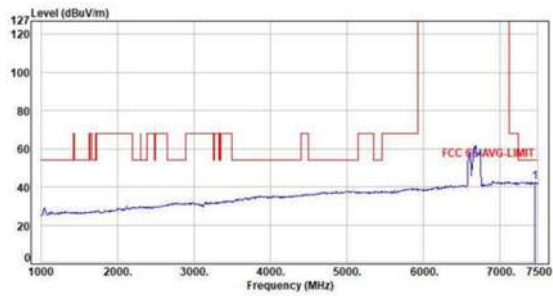

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.36	42.47	54.00	-11.53	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160CH143 NSS1 MCS0
Pol : Horizontal Detector : Average

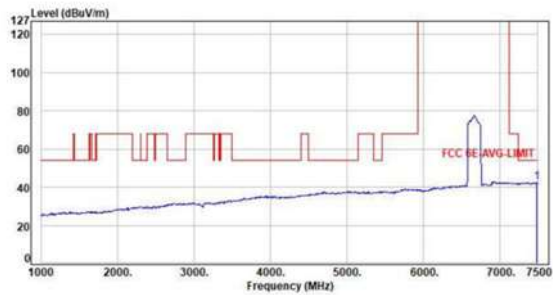


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7480.50	4.02	38.55	42.57	54.00	-11.43	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Pol : Vertical Detector : Peak

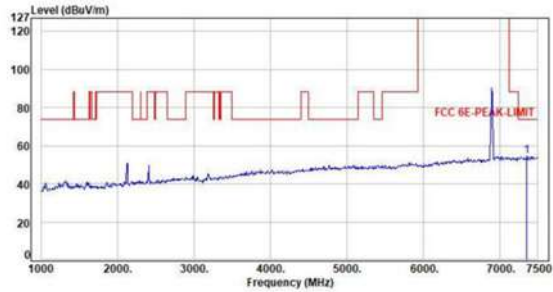

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	50.41	54.48	74.00	-19.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Pol : Vertical Detector : Average

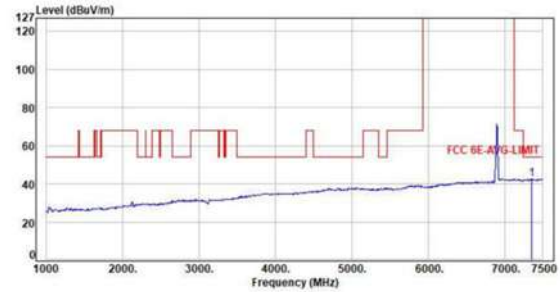

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	38.45	42.54	54.00	-11.46	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Pol : Horizontal Detector : Peak

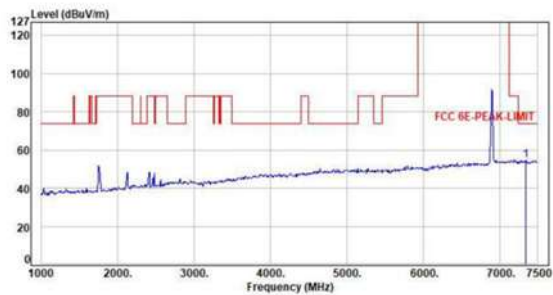

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	50.44	54.53	74.00	-19.47	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Pol : Horizontal Detector : Average

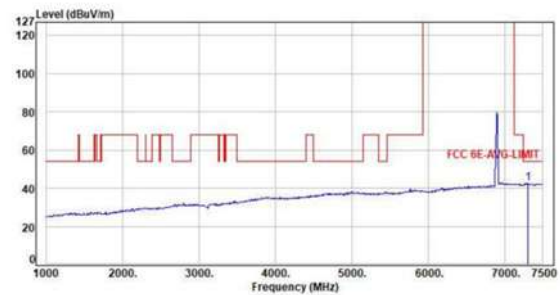


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	38.47	42.58	54.00	-11.42	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Pol : Vertical Detector : Peak

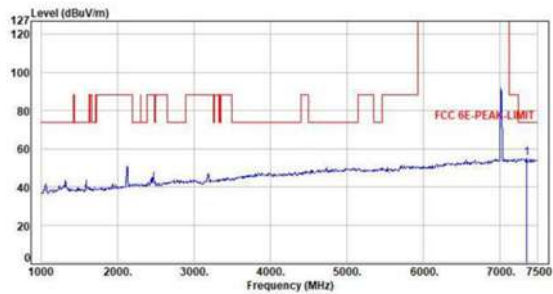

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	51.00	55.09	74.00	-18.91	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Pol : Vertical Detector : Average

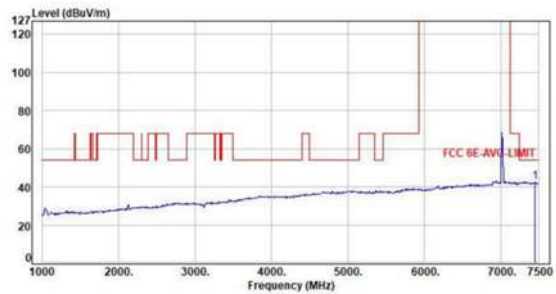

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	38.52	42.65	54.00	-11.35	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Pol : Horizontal Detector : Peak

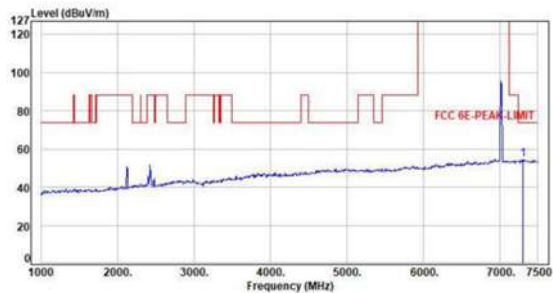

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	50.51	54.62	74.00	-19.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Pol : Horizontal Detector : Average

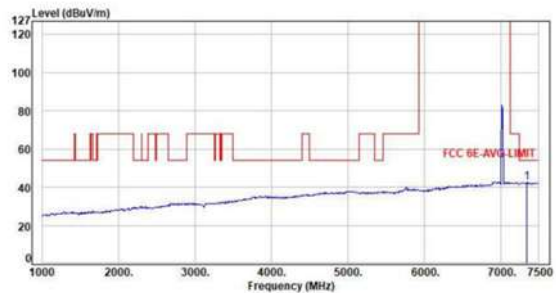


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.48	42.57	54.00	-11.43	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Pol : Vertical Detector : Peak

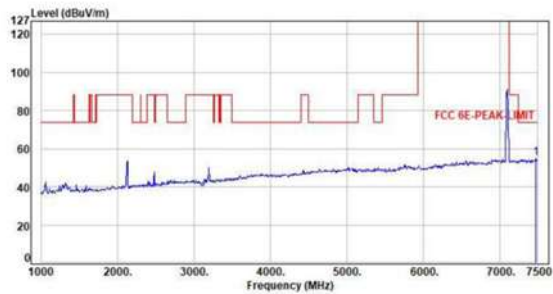

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	50.78	54.82	74.00	-19.18	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Pol : Vertical Detector : Average

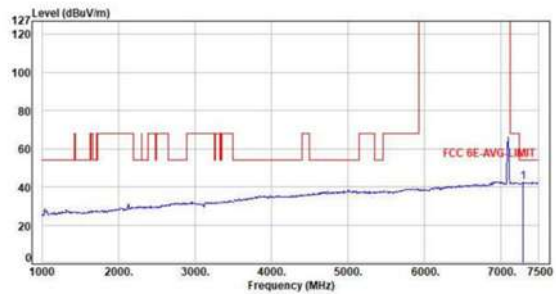

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	38.17	42.26	54.00	-11.74	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Pol : Horizontal Detector : Peak

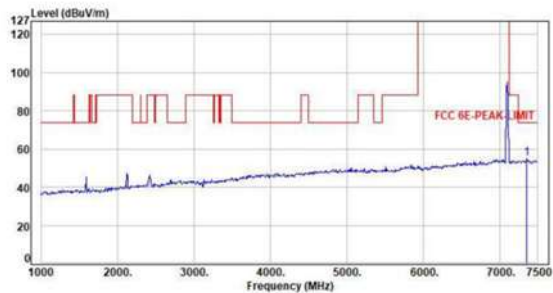

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	50.88	54.95	74.00	-19.05	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Pol : Horizontal Detector : Average

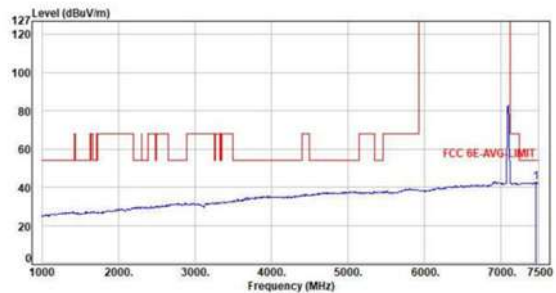


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.59	42.70	54.00	-11.30	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Pol : Vertical Detector : Peak

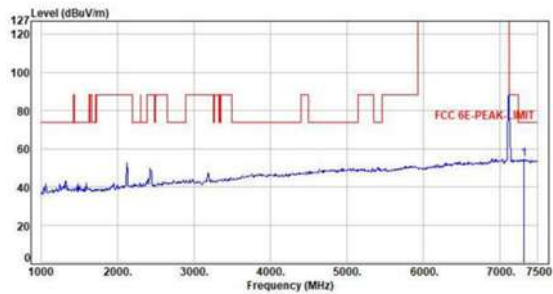

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	50.49	54.60	74.00	-19.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Pol : Vertical Detector : Average

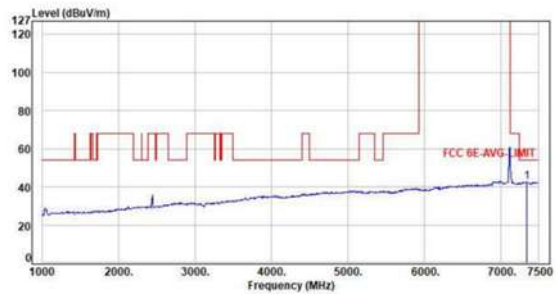

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.51	42.60	54.00	-11.40	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Pol : Horizontal Detector : Peak

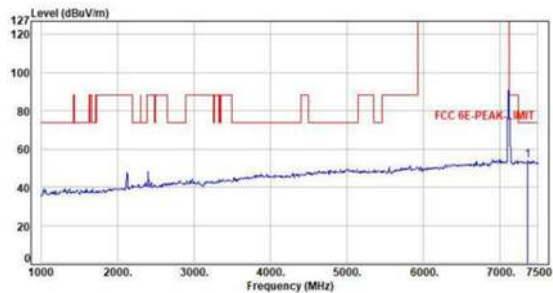

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	49.97	54.01	74.00	-19.99	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Pol : Horizontal Detector : Average

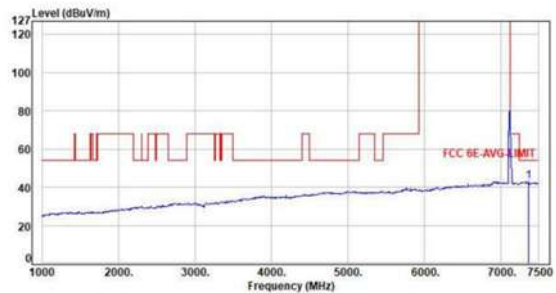


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	38.83	42.87	54.00	-11.13	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Pol : Vertical Detector : Peak

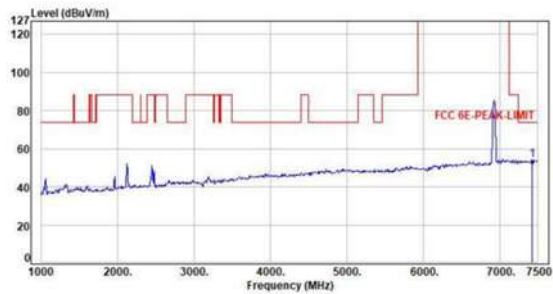

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7422.00	4.05	50.17	54.22	74.00	-19.78	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Pol : Vertical Detector : Average

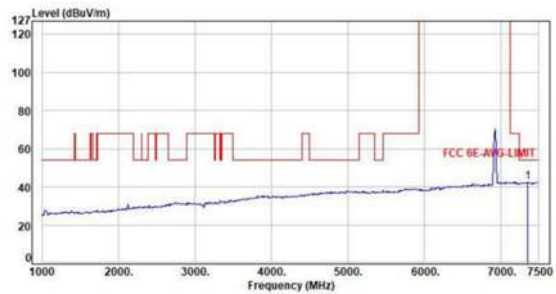

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7358.50	4.09	38.42	42.51	54.00	-11.49	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Pol : Horizontal Detector : Peak

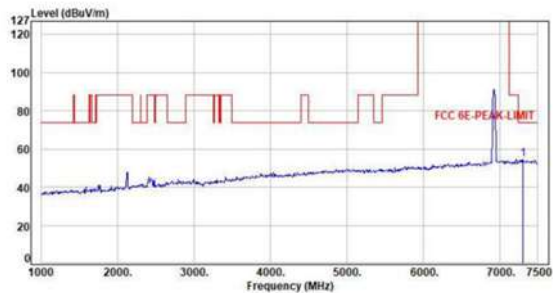

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	50.49	54.60	74.00	-19.40	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Pol : Horizontal Detector : Average

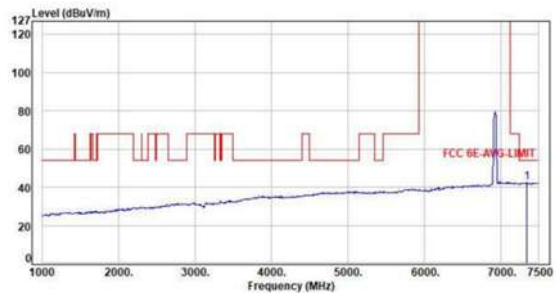


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.35	42.44	54.00	-11.56	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Pol : Vertical Detector : Peak

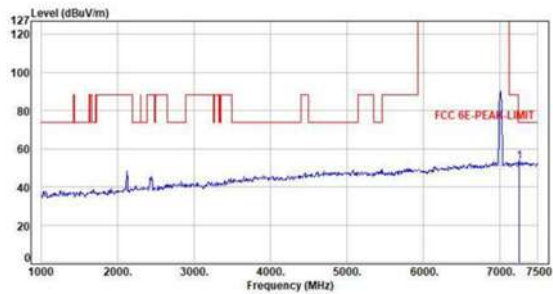

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7259.50	3.97	49.87	53.84	74.00	-20.16	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Pol : Vertical Detector : Average

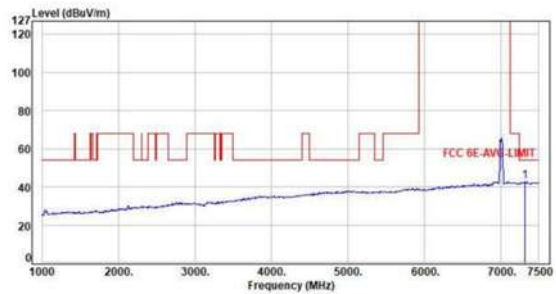

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	38.75	42.85	54.00	-11.15	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Pol : Horizontal Detector : Peak

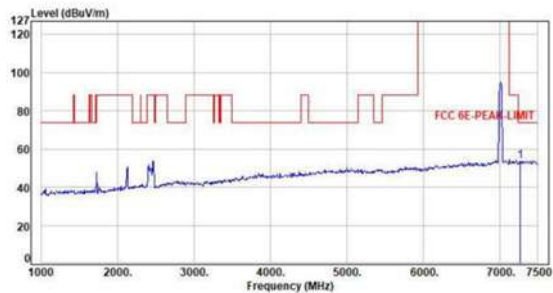

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7272.50	4.01	49.83	53.84	74.00	-20.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Pol : Horizontal Detector : Average

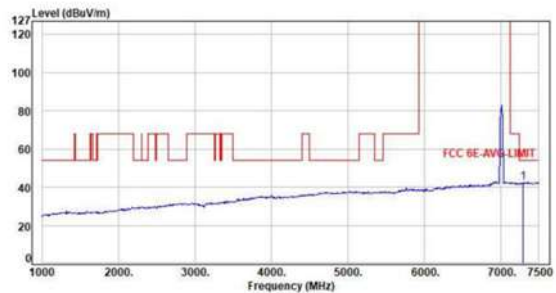


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	38.49	42.58	54.00	-11.42	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Pol : Vertical Detector : Peak

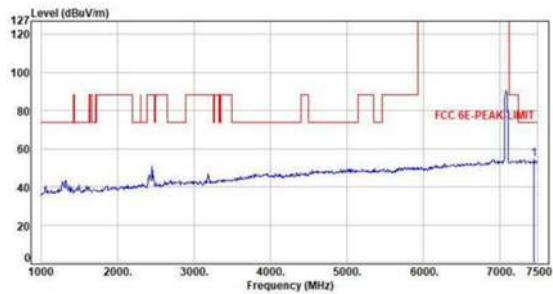

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.48	54.61	74.00	-19.39	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Pol : Vertical Detector : Average

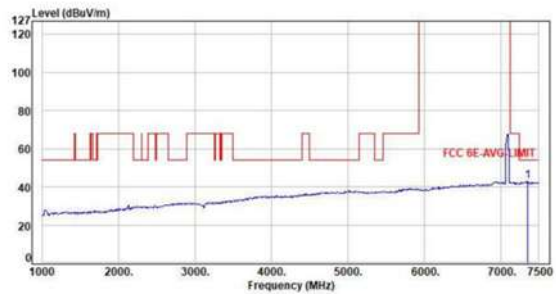

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	38.70	42.79	54.00	-11.21	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Pol : Horizontal Detector : Peak

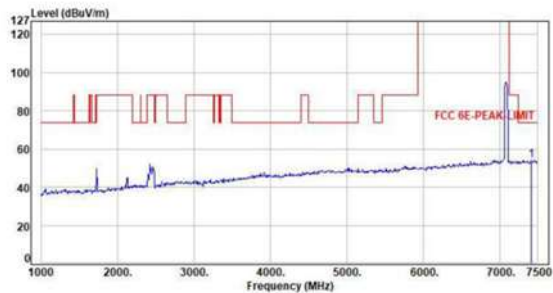

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7415.50	4.02	49.93	53.95	74.00	-20.05	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Pol : Horizontal Detector : Average

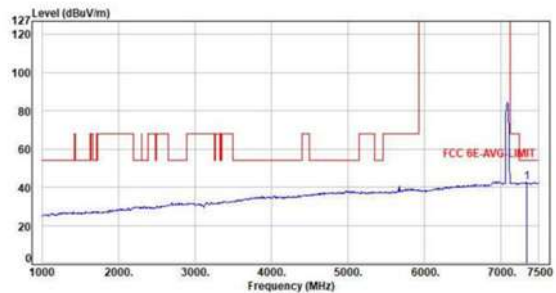


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.50	42.59	54.00	-11.41	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Pol : Vertical Detector : Peak

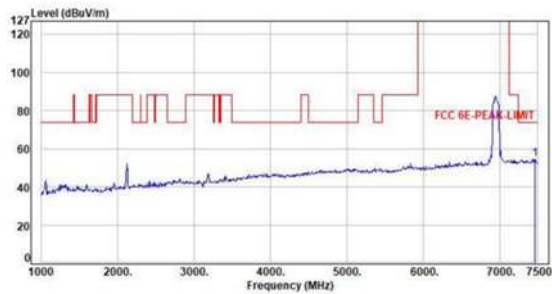

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	50.66	54.77	74.00	-19.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Pol : Vertical Detector : Average

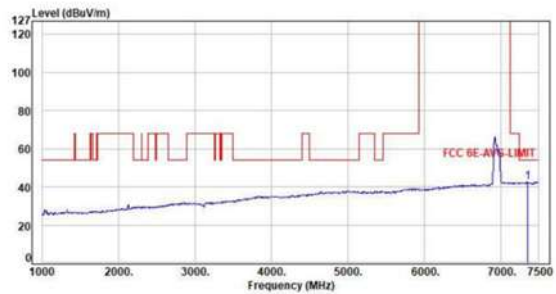

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	38.38	42.47	54.00	-11.53	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Pol : Horizontal Detector : Peak

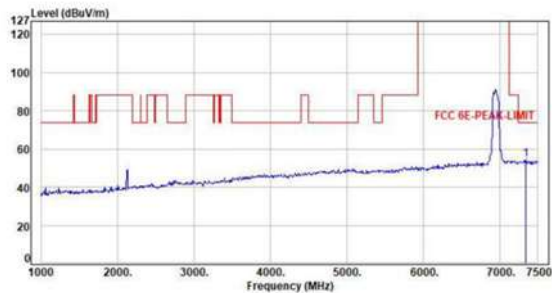

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	50.27	54.36	74.00	-19.64	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Pol : Horizontal Detector : Average

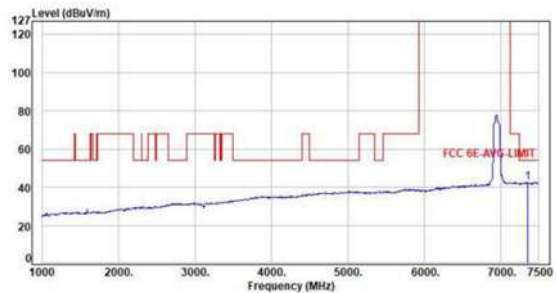


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	38.36	42.45	54.00	-11.55	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Pol : Vertical Detector : Peak

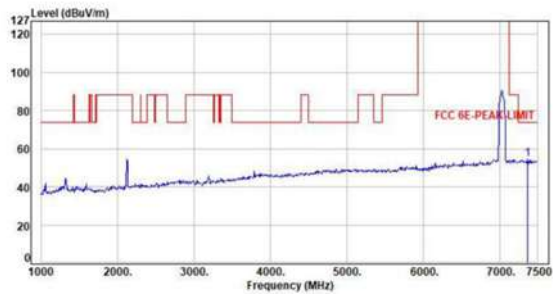

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	50.50	54.54	74.00	-19.46	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Pol : Vertical Detector : Average

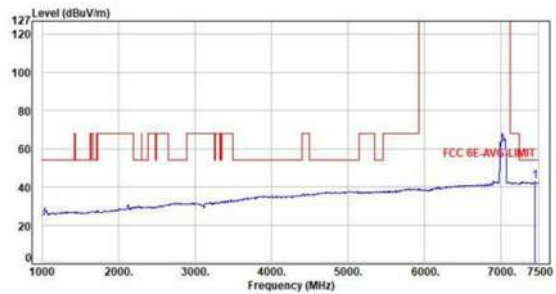

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	38.66	42.79	54.00	-11.21	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Pol : Horizontal Detector : Peak

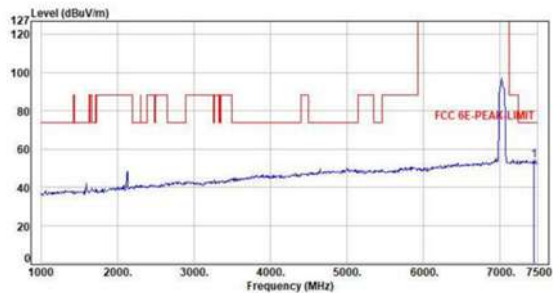

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.07	54.20	74.00	-19.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Pol : Horizontal Detector : Average

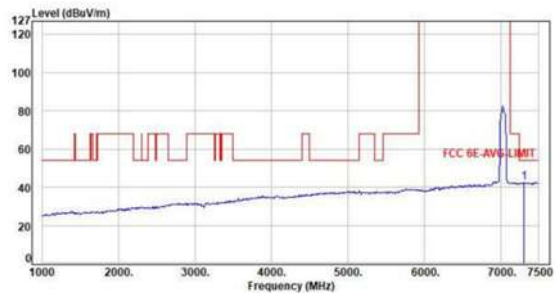


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	38.30	42.41	54.00	-11.59	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Pol : Vertical Detector : Peak

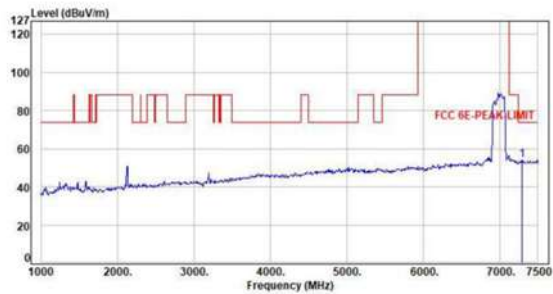

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	50.15	54.24	74.00	-19.76	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Pol : Vertical Detector : Average

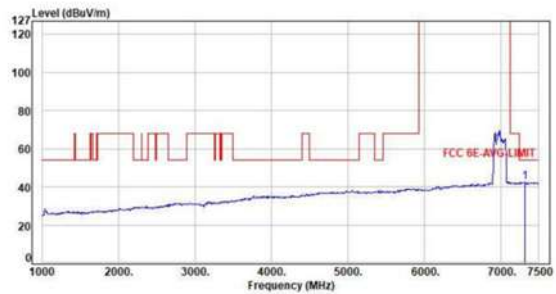

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.37	42.48	54.00	-11.52	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Pol : Horizontal Detector : Peak

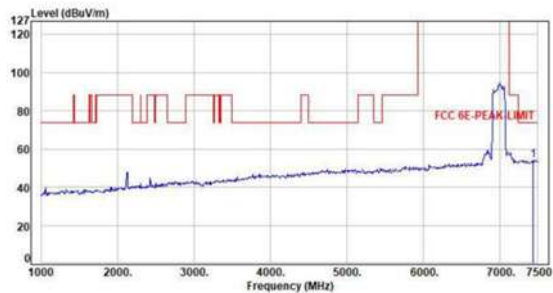

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7441.50	4.12	49.92	54.04	74.00	-19.96	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Pol : Horizontal Detector : Average

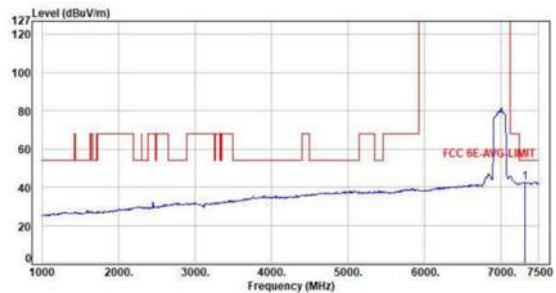


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	38.43	42.53	54.00	-11.47	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Pol : Vertical Detector : Peak

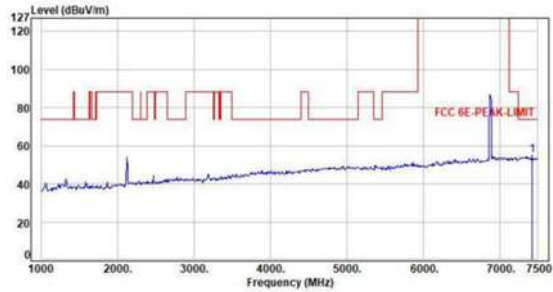

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7422.00	4.05	50.78	54.83	74.00	-19.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Pol : Vertical Detector : Average

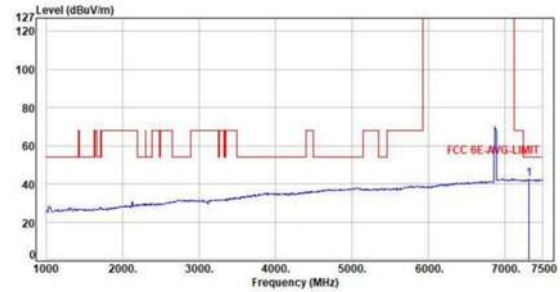

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	38.19	42.29	54.00	-11.71	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Pol : Horizontal Detector : Peak

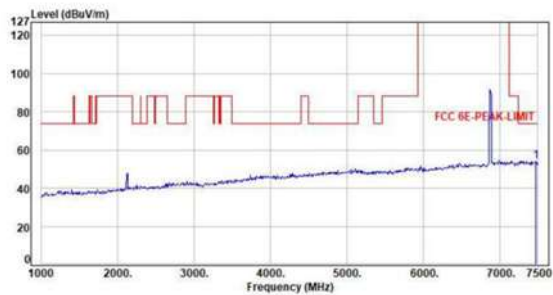

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	50.20	54.24	74.00	-19.76	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Pol : Horizontal Detector : Average

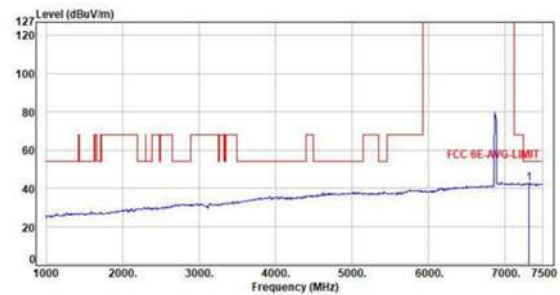


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	38.44	42.54	54.00	-11.46	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Pol : Vertical Detector : Peak

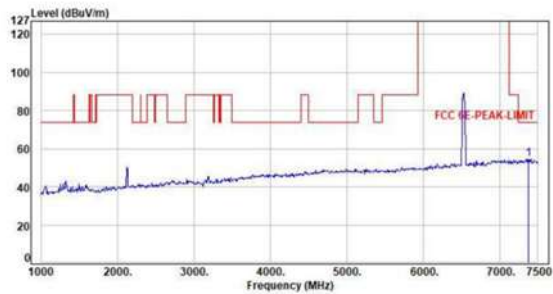

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.03	50.67	54.70	74.00	-19.30	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Pol : Vertical Detector : Average

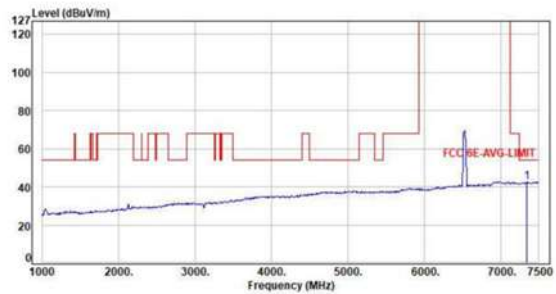

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.61	42.70	54.00	-11.30	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Pol : Horizontal Detector : Peak

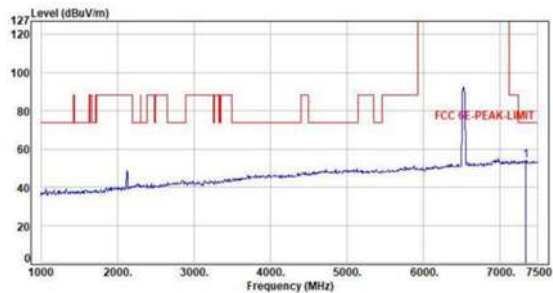

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	50.00	54.17	74.00	-19.83	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Pol : Horizontal Detector : Average

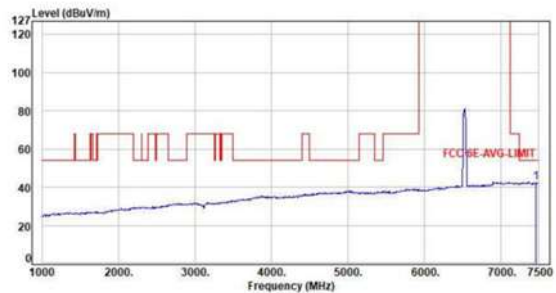


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.40	42.51	54.00	-11.49	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Pol : Vertical Detector : Peak

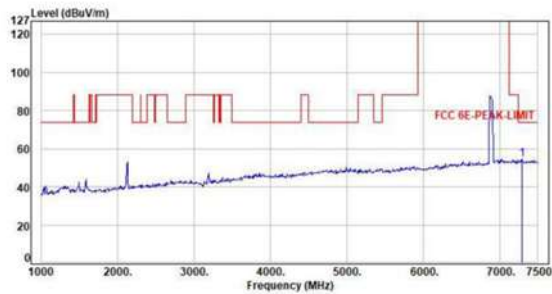

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	50.41	54.50	74.00	-19.50	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Pol : Vertical Detector : Average

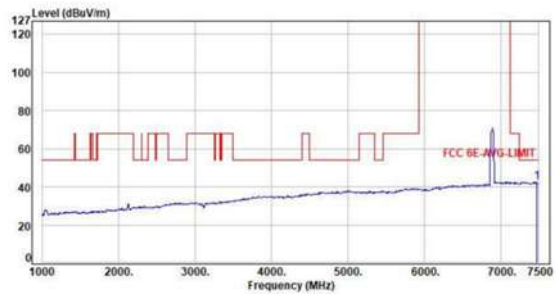

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	38.55	42.59	54.00	-11.41	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Pol : Horizontal Detector : Peak

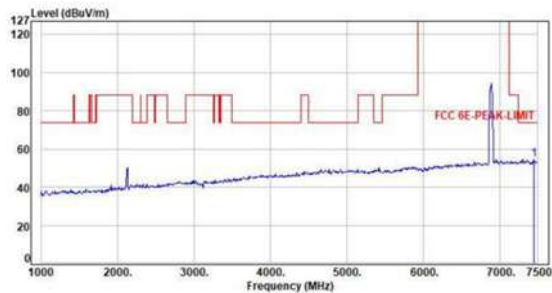

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.51	54.64	74.00	-19.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Pol : Horizontal Detector : Average

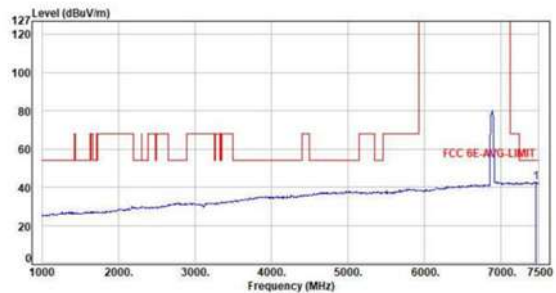


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.53	42.64	54.00	-11.36	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Pol : Vertical Detector : Peak

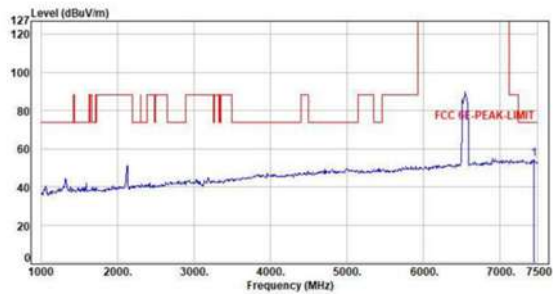

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.49	54.62	74.00	-19.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Pol : Vertical Detector : Average

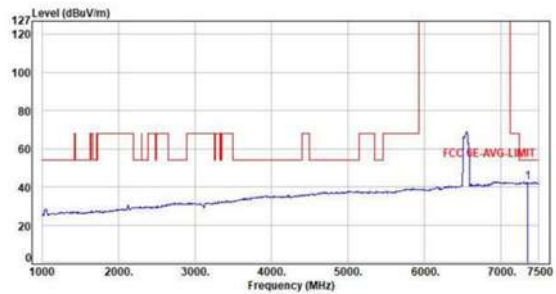

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7358.50	4.09	38.30	42.39	54.00	-11.61	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Pol : Horizontal Detector : Peak

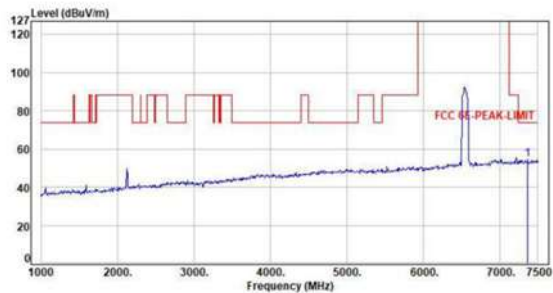

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	50.40	54.44	74.00	-19.56	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Pol : Horizontal Detector : Average

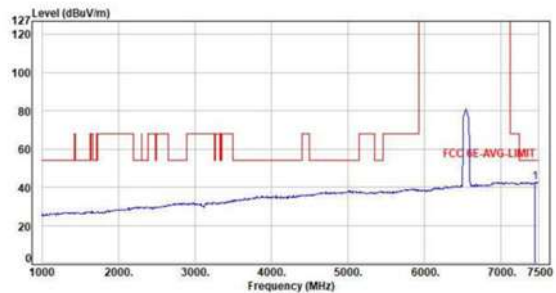


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	38.38	42.51	54.00	-11.49	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Pol : Vertical Detector : Peak

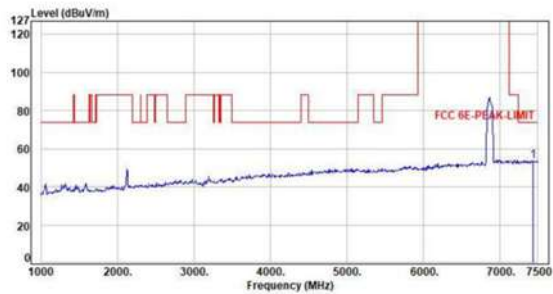

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7435.00	4.10	49.67	53.77	74.00	-20.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Pol : Vertical Detector : Average

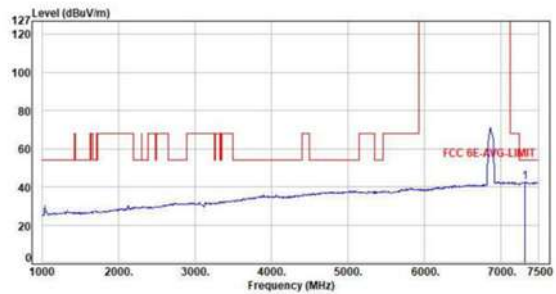

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.37	42.48	54.00	-11.52	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Pol : Horizontal Detector : Peak

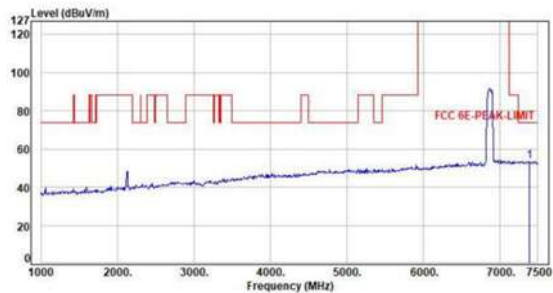

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7389.50	3.99	49.65	53.64	74.00	-20.36	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Pol : Horizontal Detector : Average

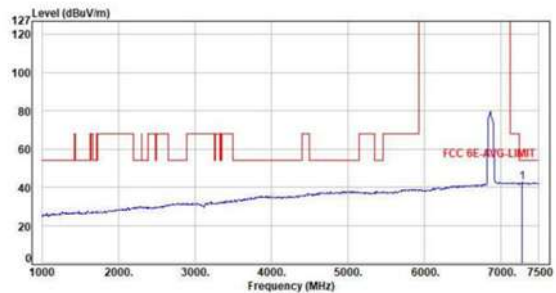


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7285.50	4.05	38.30	42.35	54.00	-11.65	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Pol : Vertical Detector : Peak

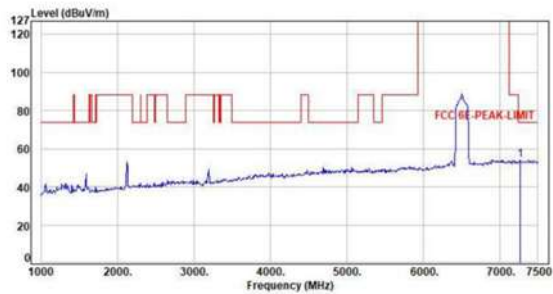

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7266.00	3.98	50.29	54.27	74.00	-19.73	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Pol : Vertical Detector : Average

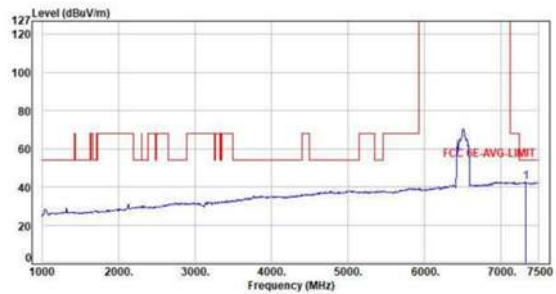

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	38.38	42.48	54.00	-11.52	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Pol : Horizontal Detector : Peak

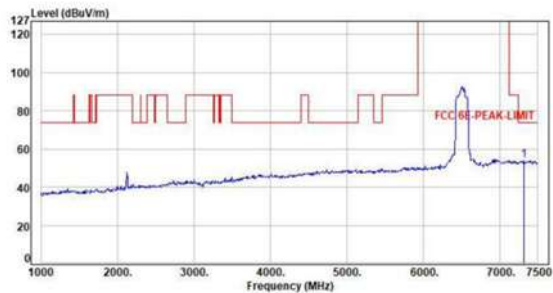

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	49.78	53.89	74.00	-20.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Pol : Horizontal Detector : Average

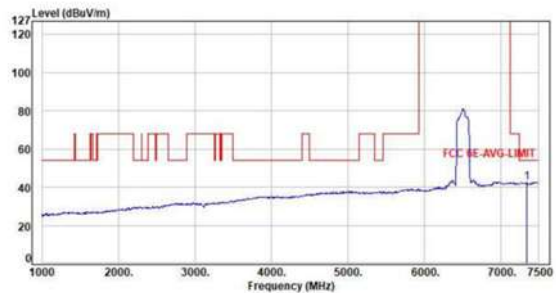


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	38.41	42.50	54.00	-11.50	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Pol : Vertical Detector : Peak

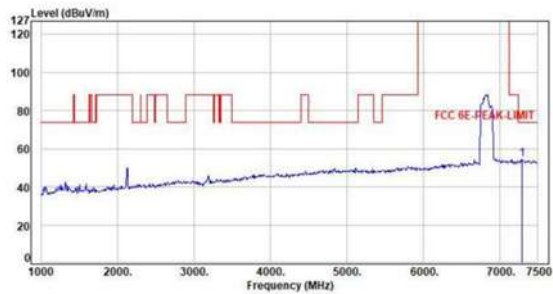

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	50.57	54.66	74.00	-19.34	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Pol : Vertical Detector : Average

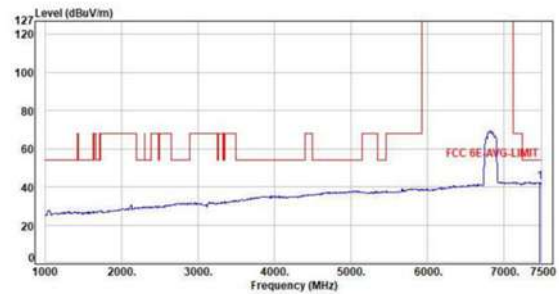

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	38.42	42.46	54.00	-11.54	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Pol : Horizontal Detector : Peak

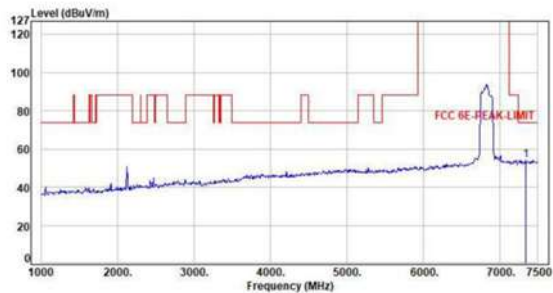

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	50.14	54.23	74.00	-19.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Pol : Horizontal Detector : Average

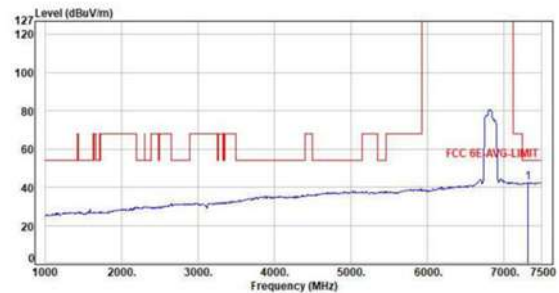

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	38.45	42.55	54.00	-11.45	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




SISO-Main

Test Mode : 1TX 11a CH01 6Mbps

Pol : Vertical

Detector : Peak

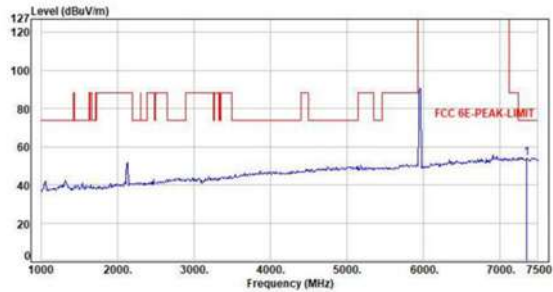


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.50	4.07	50.09	54.16	74.00	-19.84	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Vertical

Detector : Average

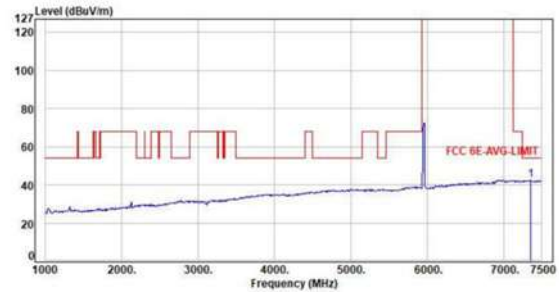


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	38.20	42.27	54.00	-11.73	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Horizontal

Detector : Peak

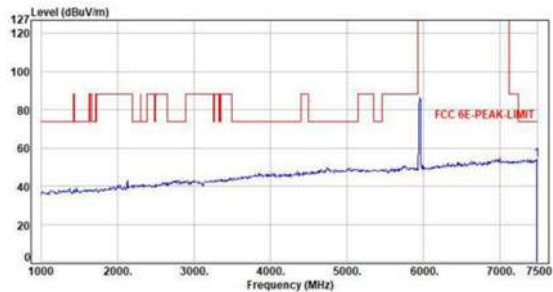


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7480.50	4.02	49.95	53.97	74.00	-20.03	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH01 6Mbps

Pol : Horizontal

Detector : Average

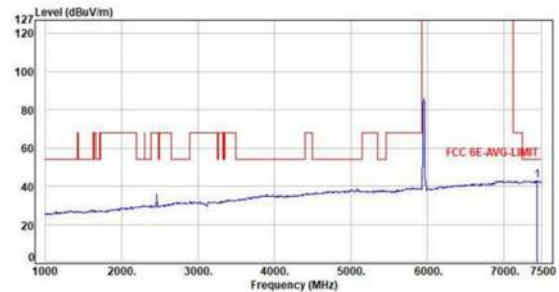

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7435.00	4.10	38.76	42.86	54.00	-11.14	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH45 6Mbps

Pol : Vertical

Detector : Peak

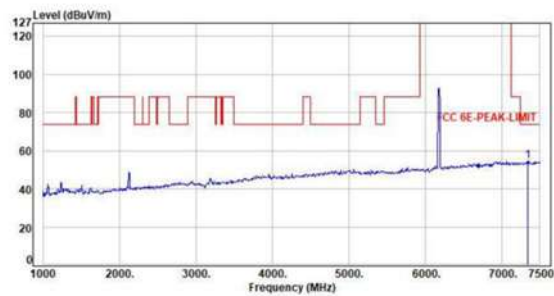


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7337.50	4.09	50.48	54.57	74.00	-19.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH45 6Mbps

Pol : Vertical

Detector : Average

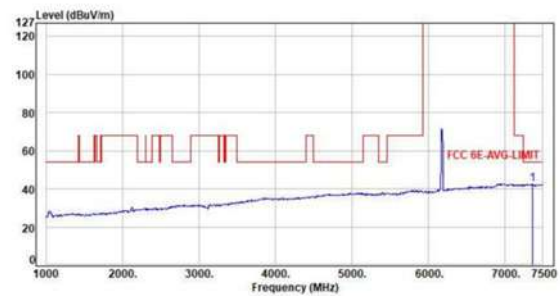


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	38.43	42.47	54.00	-11.53	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH45 6Mbps

Pol : Horizontal

Detector : Peak

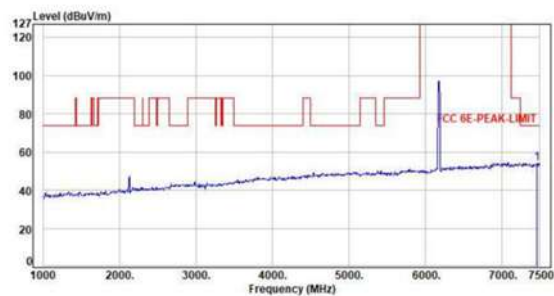


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	50.19	54.30	74.00	-19.70	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH45 6Mbps

Pol : Horizontal

Detector : Average

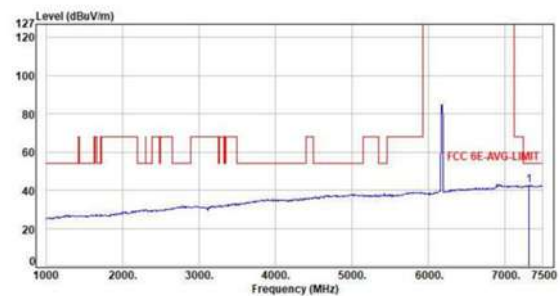

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.31	42.42	54.00	-11.58	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH93 6Mbps

Pol : Vertical

Detector : Peak

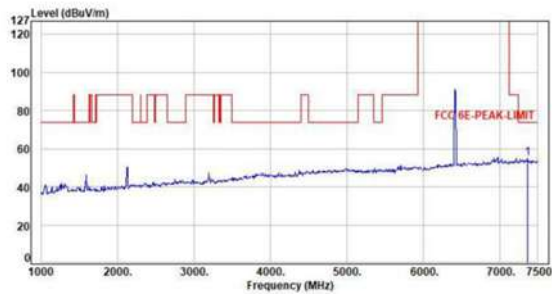

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	50.84	54.88	74.00	-19.12	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH93 6Mbps

Pol : Vertical

Detector : Average

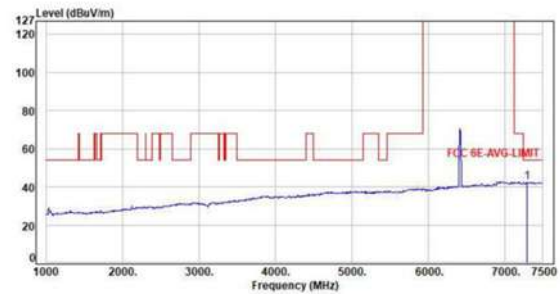

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	38.23	42.32	54.00	-11.68	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH93 6Mbps

Pol : Horizontal

Detector : Peak

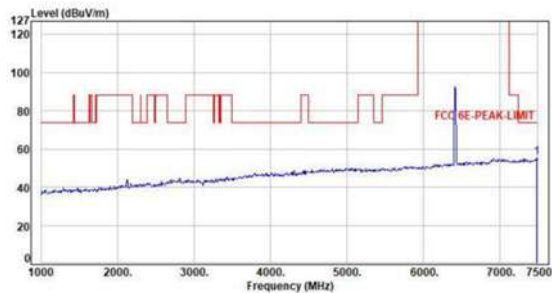

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7480.50	4.02	51.29	55.31	74.00	-18.69	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH93 6Mbps

Pol : Horizontal

Detector : Average

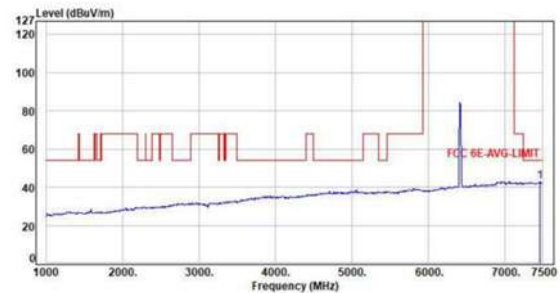

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.81	42.92	54.00	-11.08	Average	150	0	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH97 6Mbps

Pol : Vertical

Detector : Peak

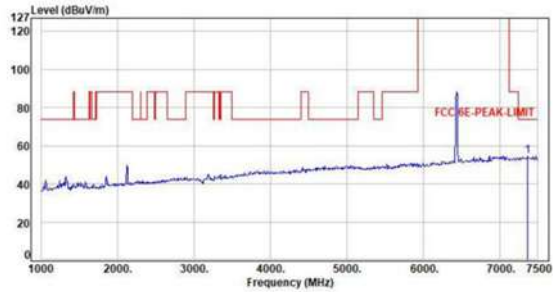


Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	50.51	54.55	74.00	-19.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH97 6Mbps

Pol : Vertical

Detector : Average

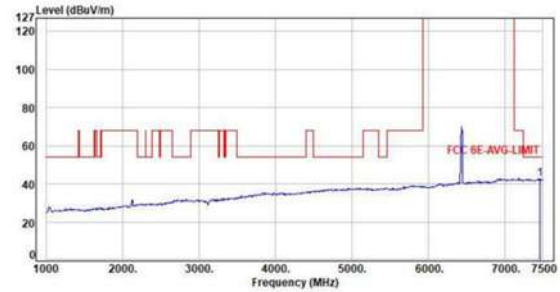


Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.44	42.55	54.00	-11.45	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH97 6Mbps

Pol : Horizontal

Detector : Peak

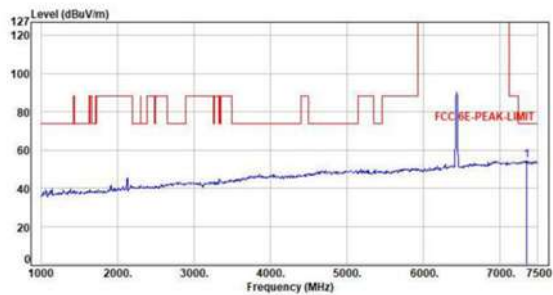


Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	50.46	54.55	74.00	-19.45	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH97 6Mbps

Pol : Horizontal

Detector : Average

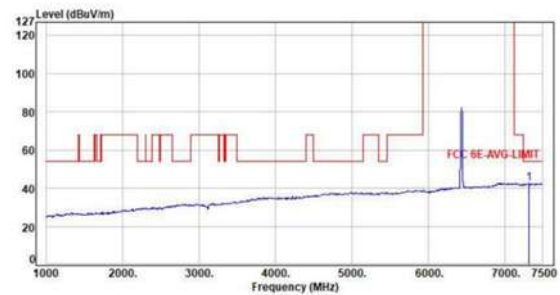

Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.47	42.58	54.00	-11.42	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH105 6Mbps

Pol : Vertical

Detector : Peak

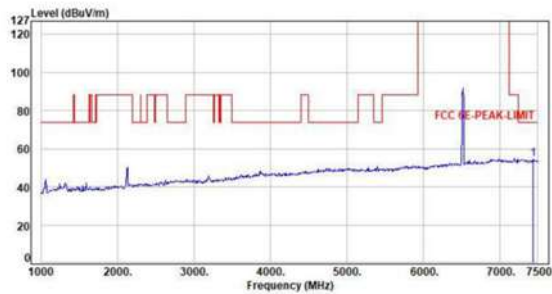


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7441.50	4.12	50.64	54.76	74.00	-19.24	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH105 6Mbps

Pol : Vertical

Detector : Average

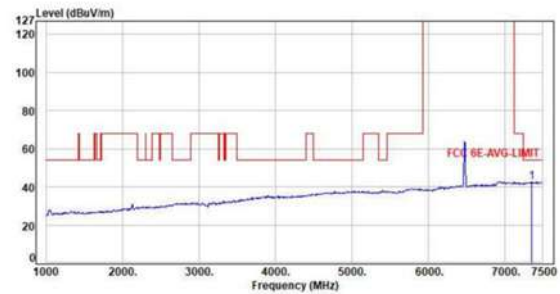


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	38.59	42.66	54.00	-11.34	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH105 6Mbps

Pol : Horizontal

Detector : Peak

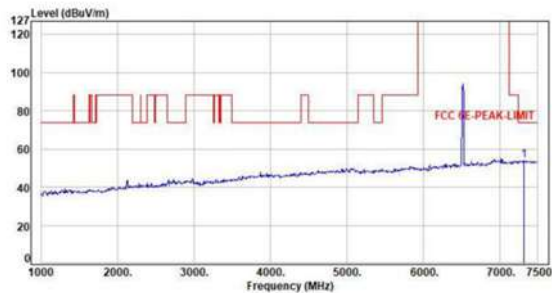


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	49.75	53.86	74.00	-20.14	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH105 6Mbps

Pol : Horizontal

Detector : Average

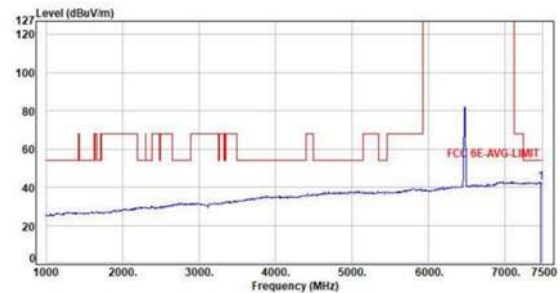

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	38.56	42.60	54.00	-11.40	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH113 6Mbps

Pol : Vertical

Detector : Peak

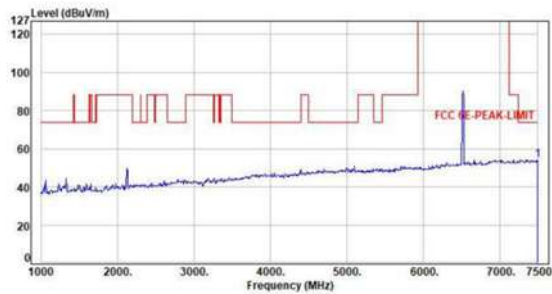

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7493.50	3.97	50.17	54.14	74.00	-19.86	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH113 6Mbps

Pol : Vertical

Detector : Average

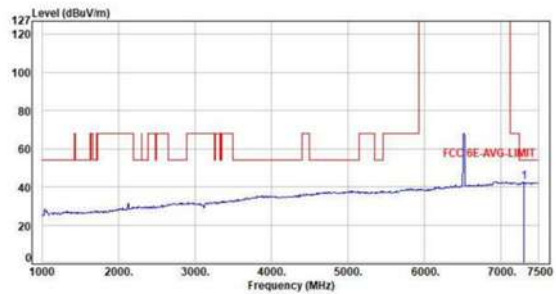

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7305.00	4.11	38.32	42.43	54.00	-11.57	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH113 6Mbps

Pol : Horizontal

Detector : Peak

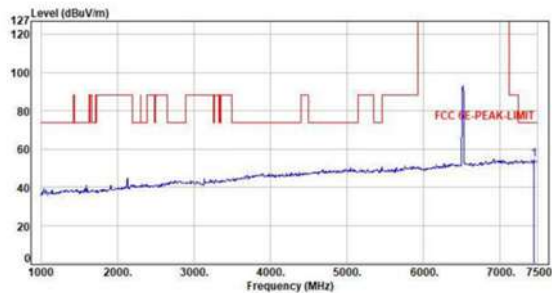

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.26	54.39	74.00	-19.61	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH113 6Mbps

Pol : Horizontal

Detector : Average

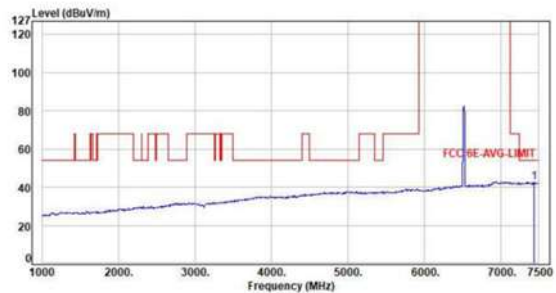

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7441.50	4.12	38.54	42.66	54.00	-11.34	Average	150	0	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH117 6Mbps

Pol : Vertical

Detector : Peak

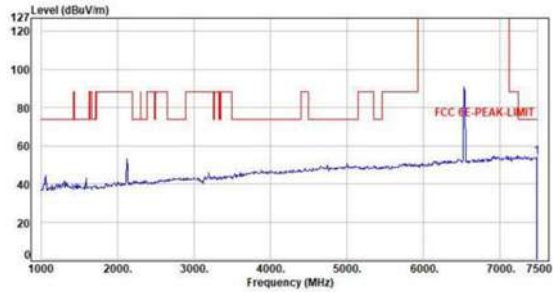


Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Limit (dBuV/m)	Margin (dBuV/m)	Detector (dB)	Height (cm)	Azimuth (deg)	P/F
1	7480.50	4.02	50.16	54.18	74.00	-19.82	Peak	150	0 P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH117 6Mbps

Pol : Vertical

Detector : Average

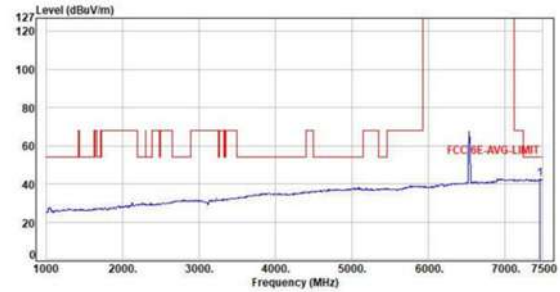


Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Limit (dBuV/m)	Margin (dBuV/m)	Detector (dB)	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.33	42.44	54.00	-11.56	Average	150	0 P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH117 6Mbps

Pol : Horizontal

Detector : Peak

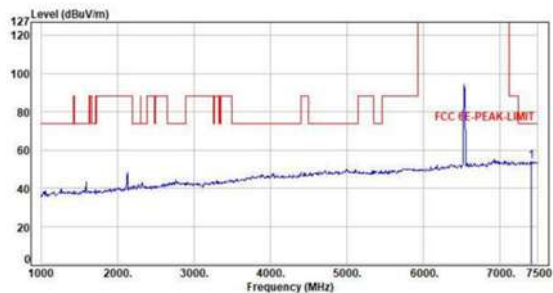


Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Limit (dBuV/m)	Margin (dBuV/m)	Detector (dB)	Height (cm)	Azimuth (deg)	P/F
1	7409.00	4.01	50.24	54.25	74.00	-19.75	Peak	150	360 P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH117 6Mbps

Pol : Horizontal

Detector : Average

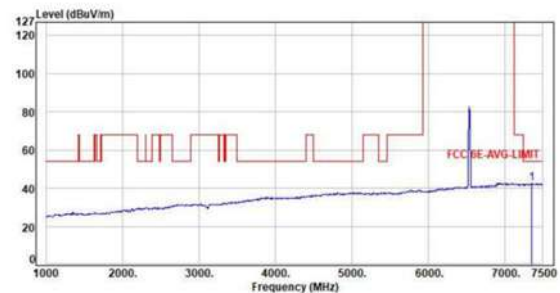

Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Limit (dBuV/m)	Margin (dBuV/m)	Detector (dB)	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	38.33	42.42	54.00	-11.58	Average	150	0 P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH153 6Mbps

Pol : Vertical

Detector : Peak

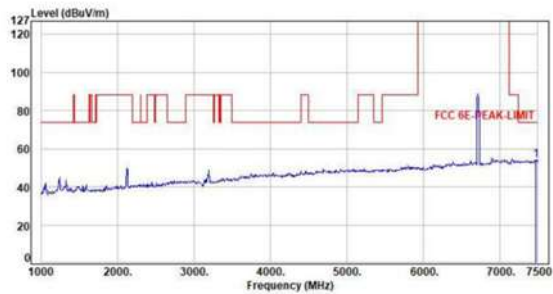

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	50.08	54.12	74.00	-19.88	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH153 6Mbps

Pol : Vertical

Detector : Average

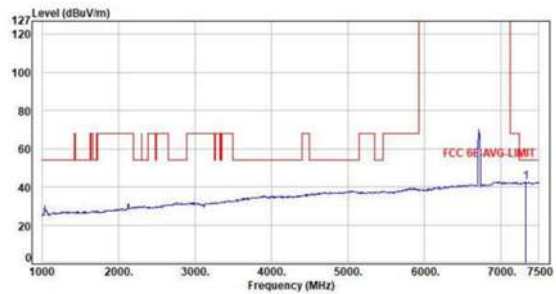

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	38.43	42.53	54.00	-11.47	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH153 6Mbps

Pol : Horizontal

Detector : Peak

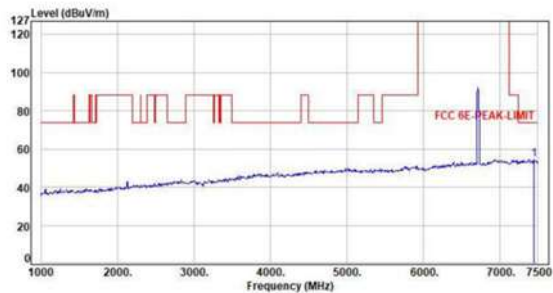

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	50.46	54.59	74.00	-19.41	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH153 6Mbps

Pol : Horizontal

Detector : Average

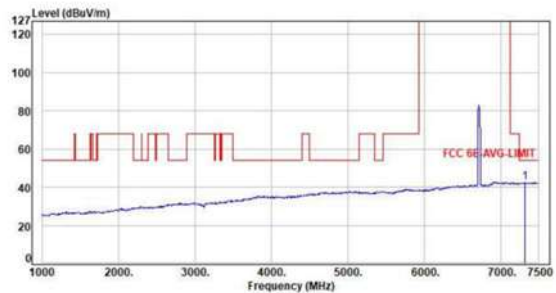

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	38.55	42.66	54.00	-11.34	Average	150	0	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH181 6Mbps

Pol : Vertical

Detector : Peak

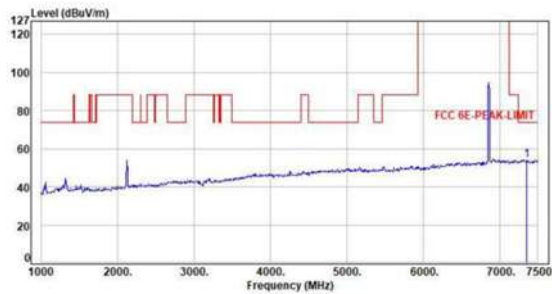

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	50.05	54.12	74.00	-19.88	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH181 6Mbps

Pol : Vertical

Detector : Average

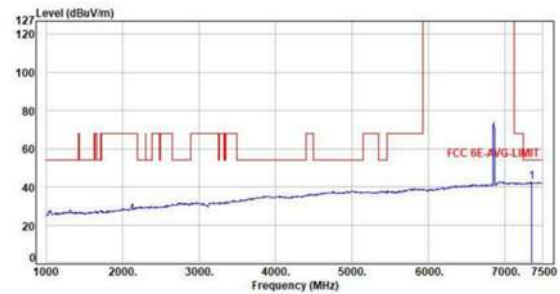

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7358.50	4.09	38.35	42.44	54.00	-11.56	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH181 6Mbps

Pol : Horizontal

Detector : Peak

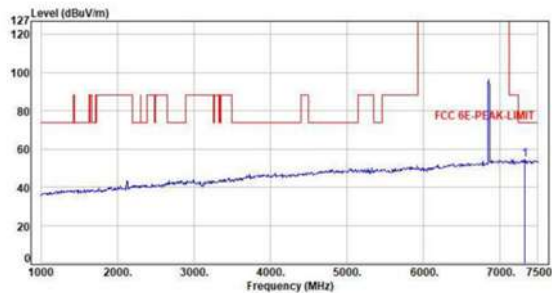

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	50.48	54.58	74.00	-19.42	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH181 6Mbps

Pol : Horizontal

Detector : Average

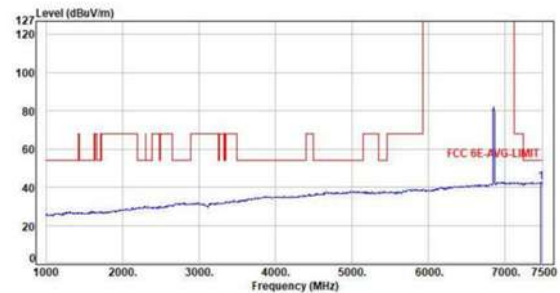

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	38.58	42.62	54.00	-11.38	Average	150	0	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH189 6Mbps

Pol : Vertical

Detector : Peak

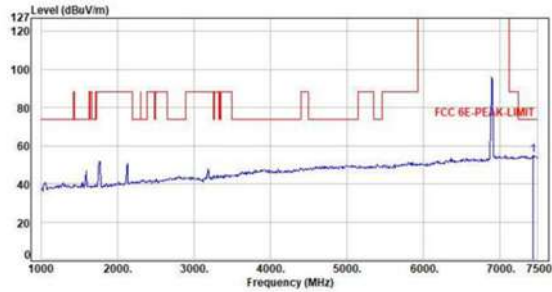


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7441.50	4.12	50.87	54.99	74.00	-19.01	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH189 6Mbps

Pol : Vertical

Detector : Average

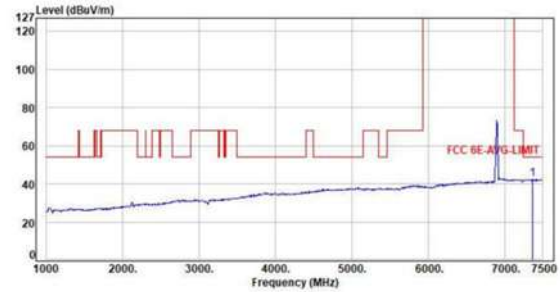


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7370.00	4.04	38.67	42.71	54.00	-11.29	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH189 6Mbps

Pol : Horizontal

Detector : Peak

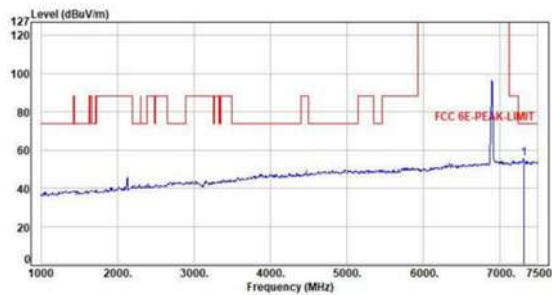


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	51.59	55.70	74.00	-18.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH189 6Mbps

Pol : Horizontal

Detector : Average

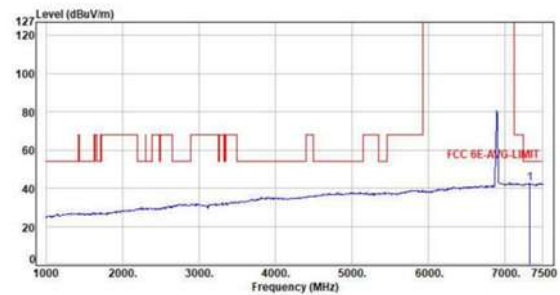

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7331.00	4.10	38.46	42.56	54.00	-11.44	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH213 6Mbps

Pol : Vertical

Detector : Peak

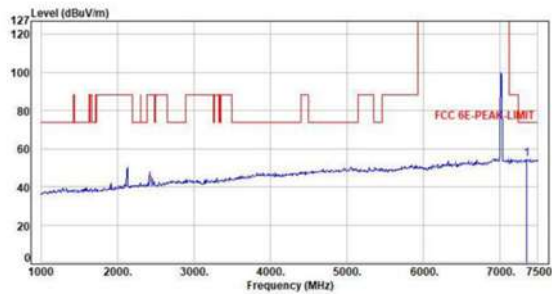


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7357.00	4.07	50.53	54.60	74.00	-19.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH213 6Mbps

Pol : Vertical

Detector : Average

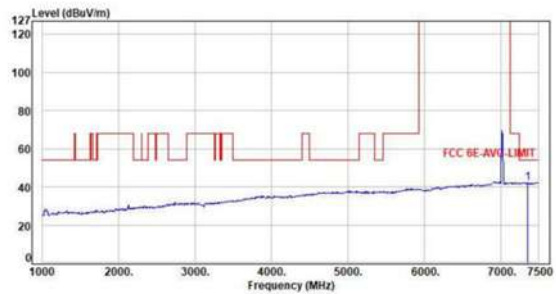


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7358.50	4.09	38.15	42.24	54.00	-11.76	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH213 6Mbps

Pol : Horizontal

Detector : Peak

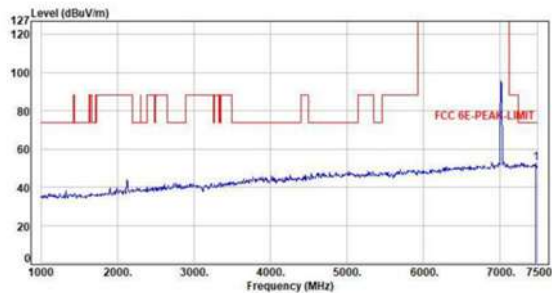


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7474.00	4.04	48.56	52.60	74.00	-21.40	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH213 6Mbps

Pol : Horizontal

Detector : Average

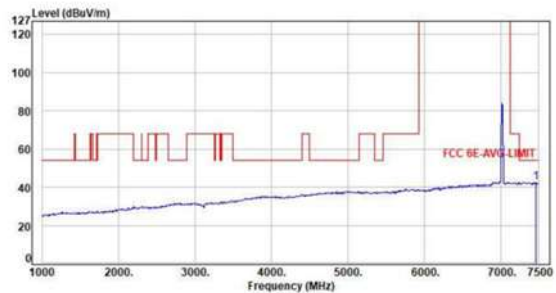

Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.28	42.39	54.00	-11.61	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH229 6Mbps

Pol : Vertical

Detector : Peak

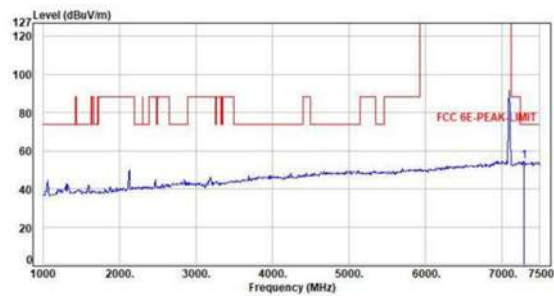


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	50.37	54.46	74.00	-19.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH229 6Mbps

Pol : Vertical

Detector : Average

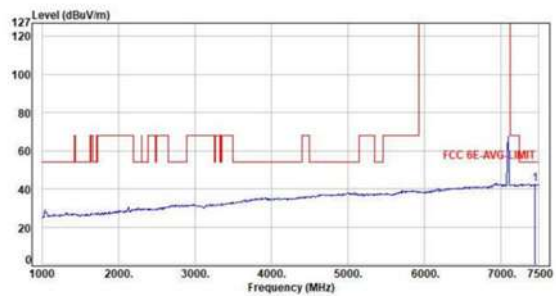


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	38.31	42.44	54.00	-11.56	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH229 6Mbps

Pol : Horizontal

Detector : Peak

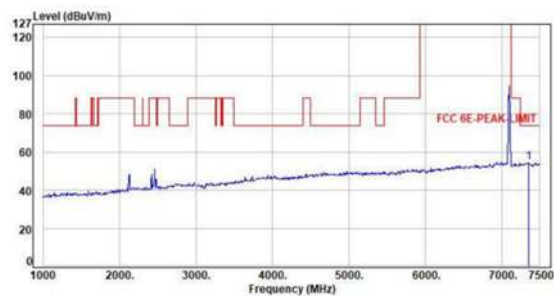


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	50.43	54.52	74.00	-19.48	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH229 6Mbps

Pol : Horizontal

Detector : Average

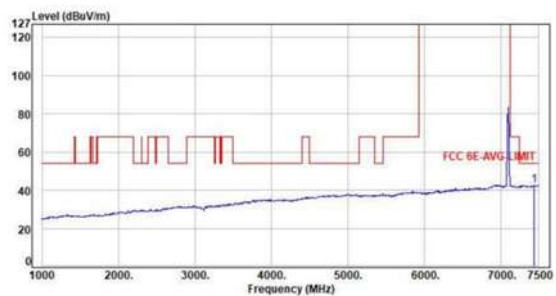

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7441.50	4.12	38.45	42.57	54.00	-11.43	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH233 6Mbps

Pol : Vertical

Detector : Peak

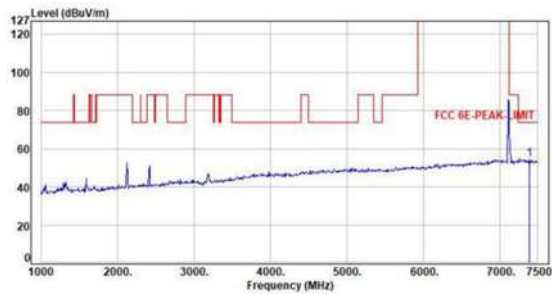


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7389.50	3.99	50.52	54.51	74.00	-19.49	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH233 6Mbps

Pol : Vertical

Detector : Average

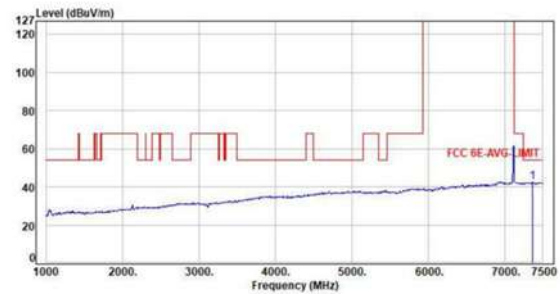


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7378.00	4.04	38.43	42.47	54.00	-11.53	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH233 6Mbps

Pol : Horizontal

Detector : Peak

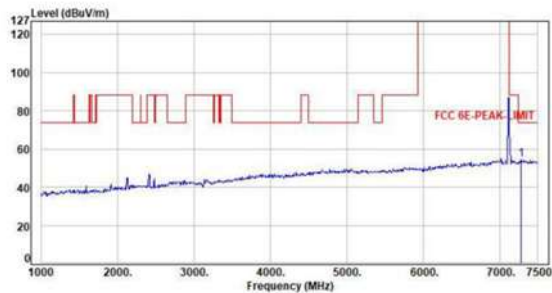


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7285.50	4.05	50.57	54.62	74.00	-19.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH233 6Mbps

Pol : Horizontal

Detector : Average

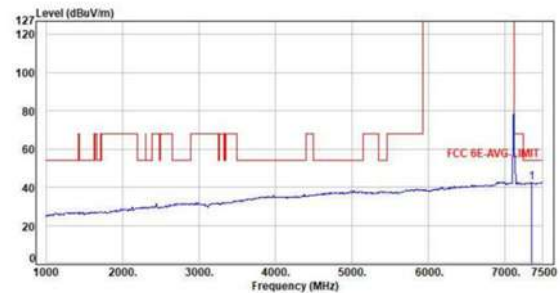

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7358.50	4.09	38.55	42.64	54.00	-11.36	Average	150	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH185 6Mbps

Pol : Vertical

Detector : Peak

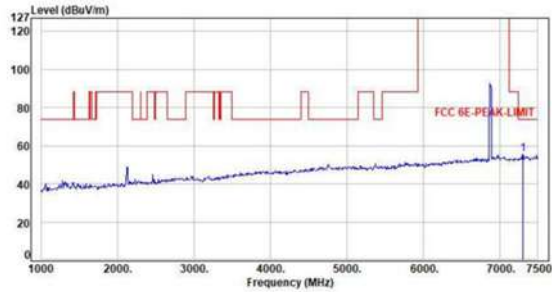


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7385.80	4.11	51.33	55.44	74.00	-18.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH185 6Mbps

Pol : Vertical

Detector : Average

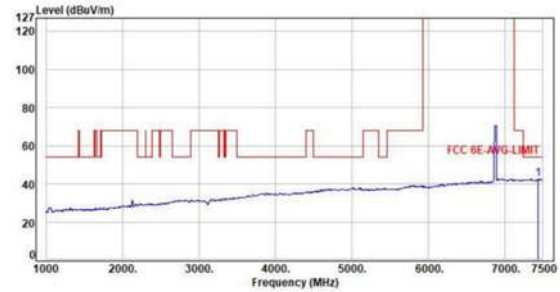


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7441.50	4.12	38.30	42.42	54.00	-11.58	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH185 6Mbps

Pol : Horizontal

Detector : Peak

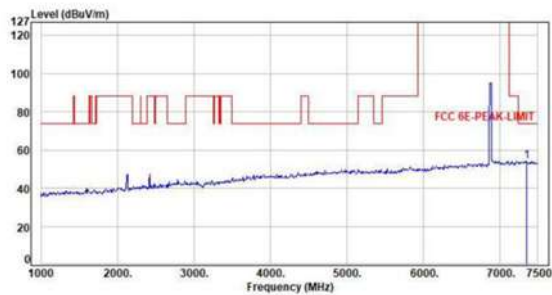


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	50.10	54.19	74.00	-19.81	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH185 6Mbps

Pol : Horizontal

Detector : Average

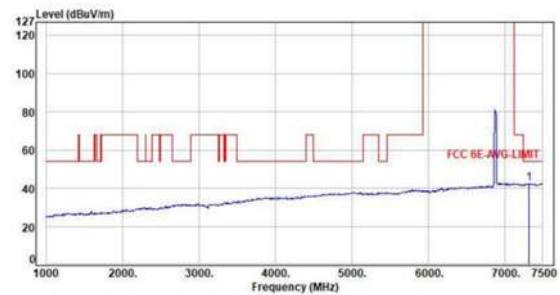


Frequency No.	(MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	38.16	42.26	54.00	-11.74	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Appendix C. Test Result and Data (7.5GHz ~18GHz)****MIMO**


Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Pol : Vertical Detector : Peak

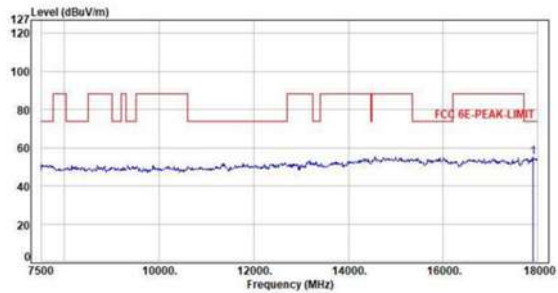

Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17895.00	5.90	49.14	55.04	74.00	-18.96	Peak	100	360 P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Pol : Vertical Detector : Average

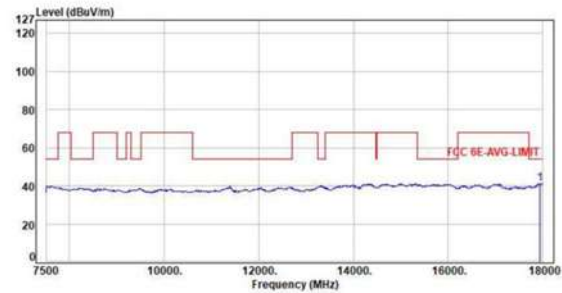

Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17937.00	6.00	35.13	41.13	54.00	-12.87	Average	100	360 P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Peak

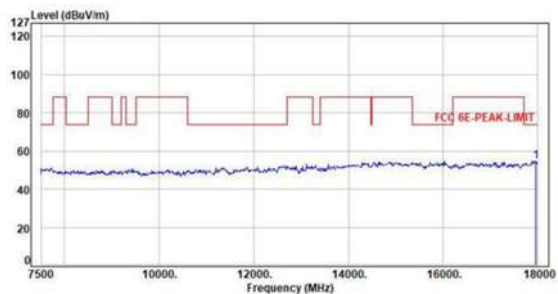

Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17958.00	6.04	48.71	54.75	74.00	-19.25	Peak	100	0 P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Average

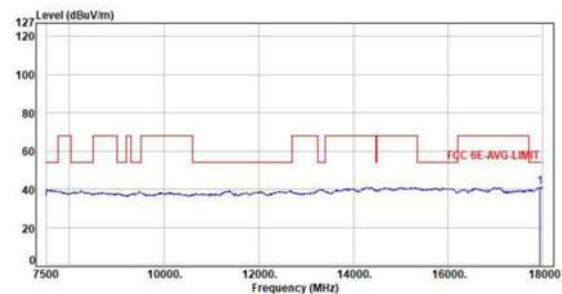

Frequency No.	Factor (MHz)	Reading (dB)	Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17937.00	6.00	35.24	41.24	54.00	-12.76	Average	100	0 P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor