



Appendix Test Data for BLE (Conducted Measurement)

Product Name: Bluetooth Earbuds

Trade Mark: /

Test Model: BH26CT11A

FCC ID: RDR-CT11AL

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.668	2401.664	2402.332	0.5	PASS
BLE_1M	Ant1	2440	0.656	2439.672	2440.328	0.5	PASS
BLE_1M	Ant1	2480	0.632	2479.680	2480.312	0.5	PASS
BLE_2M	Ant1	2402	1.364	2401.288	2402.652	0.5	PASS
BLE_2M	Ant1	2440	1.320	2439.340	2440.660	0.5	PASS
BLE_2M	Ant1	2480	1.316	2479.340	2480.656	0.5	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs





BLE_1M-Ant1-2480-PASS



BLE_2M-Ant1-2402-PASS





BLE_2M-Ant1-2440-PASS



BLE_2M-Ant1-2480-PASS





Appendix B: Occupied Channel Bandwidth

Test Result


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.0222	2401.4977	2402.5199	---	---
BLE_1M	Ant1	2440	1.0125	2439.5020	2440.5145	---	---
BLE_1M	Ant1	2480	1.0218	2479.5005	2480.5223	---	---
BLE_2M	Ant1	2402	2.0207	2401.0142	2403.0349	---	---
BLE_2M	Ant1	2440	2.0187	2439.0156	2441.0343	---	---
BLE_2M	Ant1	2480	2.0173	2479.0179	2481.0352	---	---


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

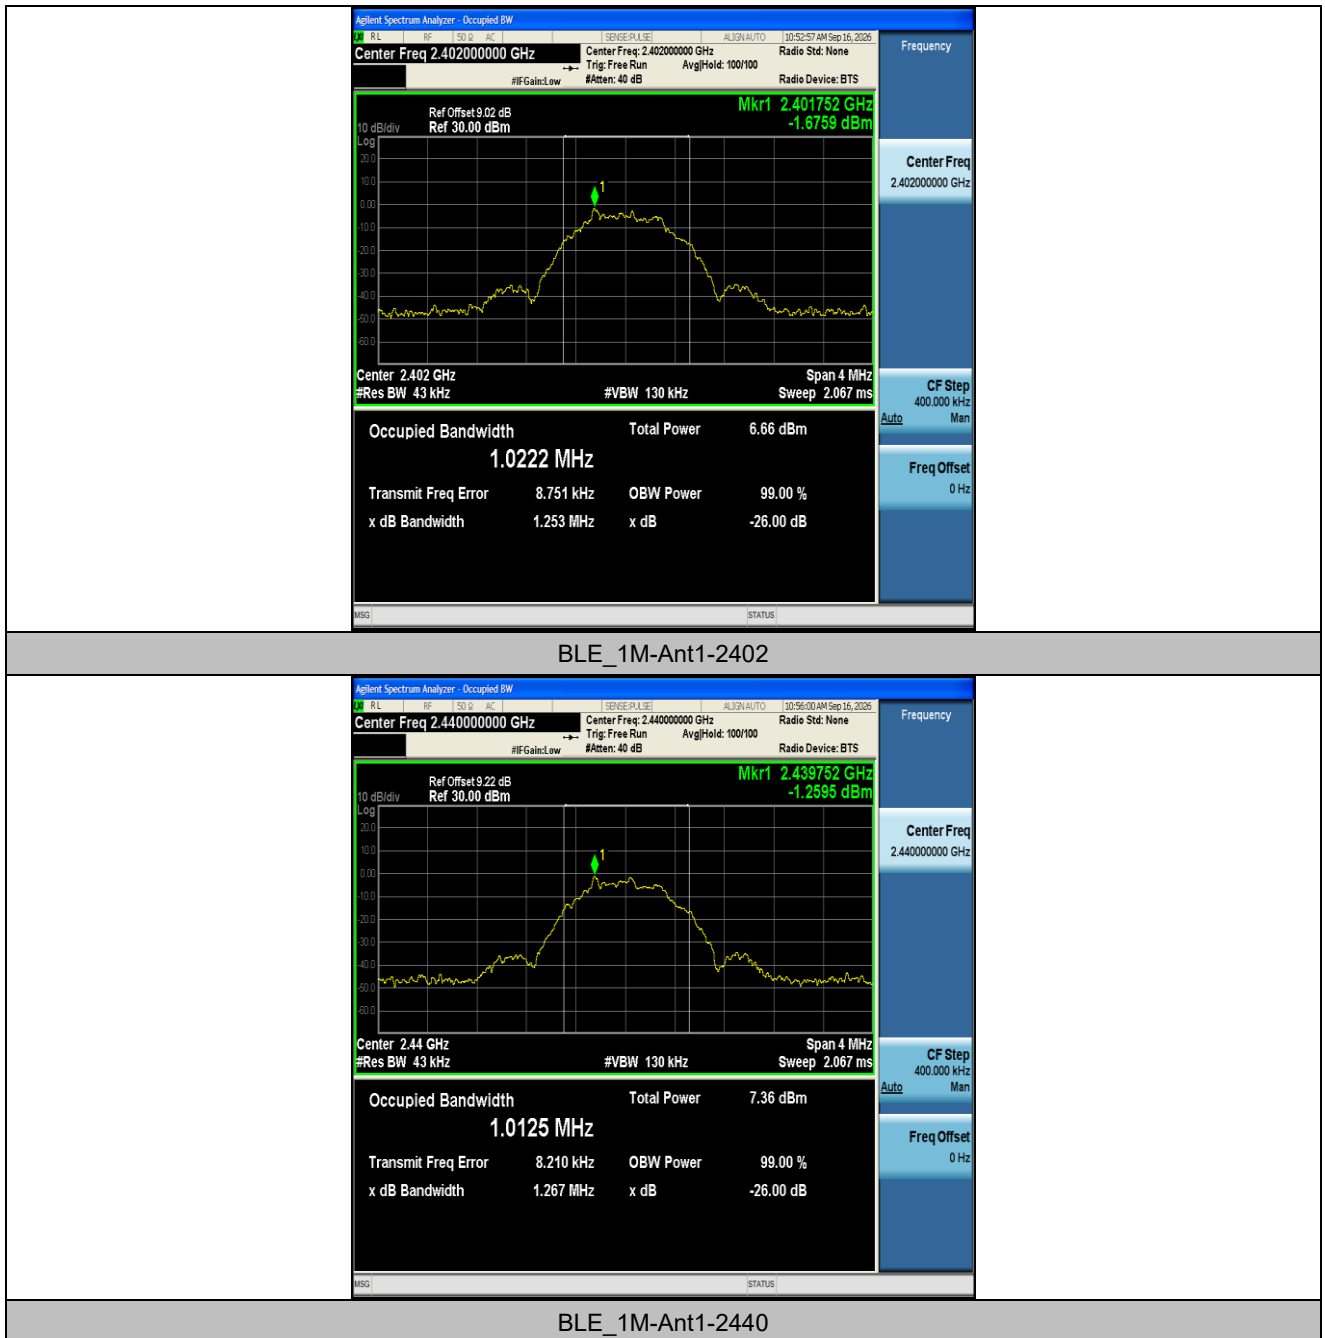

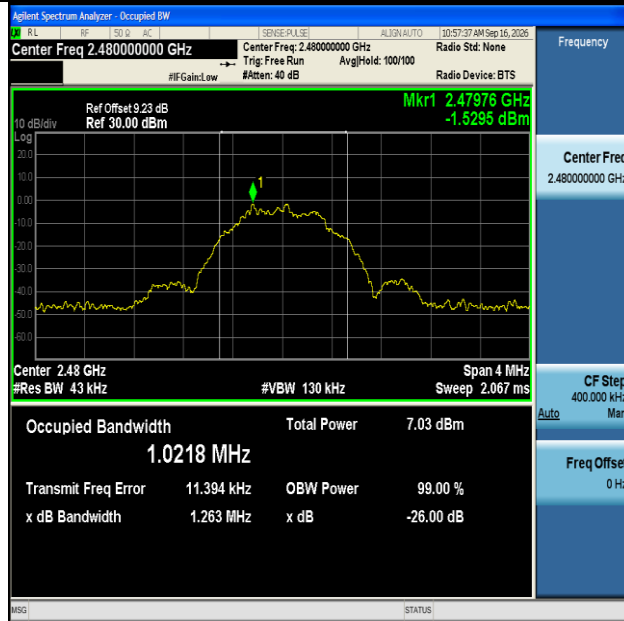

BLE_1M-Ant1-2480



BLE_2M-Ant1-2402





BLE_2M-Ant1-2440



BLE_2M-Ant1-2480





Appendix C: Maximum peak conducted output power

Test Result Peak


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.46	≤30	PASS
BLE_1M	Ant1	2440	0.92	≤30	PASS
BLE_1M	Ant1	2480	0.86	≤30	PASS
BLE_2M	Ant1	2402	0.49	≤30	PASS
BLE_2M	Ant1	2440	0.84	≤30	PASS
BLE_2M	Ant1	2480	0.79	≤30	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs Peak

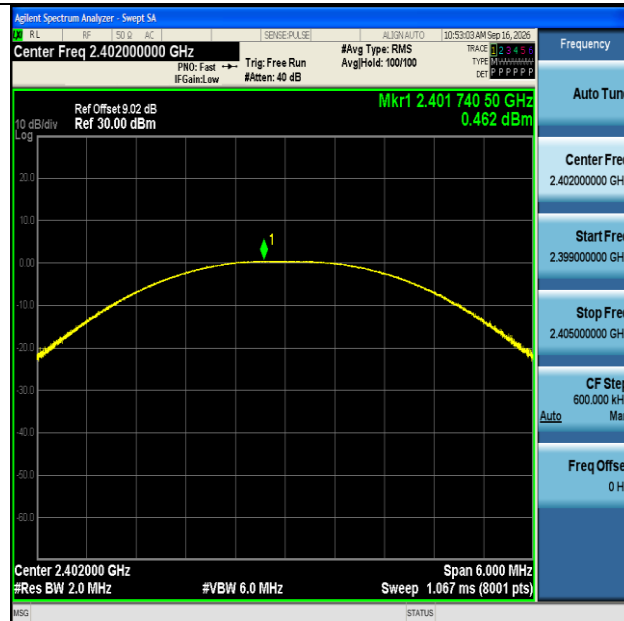


BLE_1M-Ant1-2402-PASS

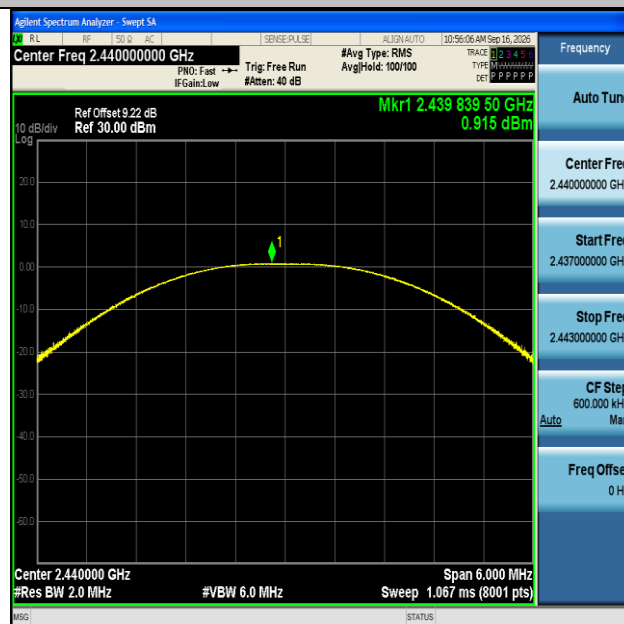


BLE_1M-Ant1-2440-PASS



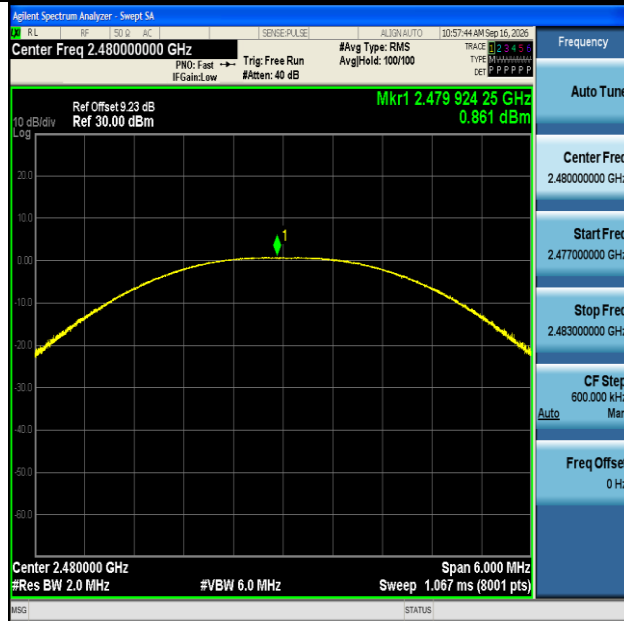


BLE_1M-Ant1-2480-PASS

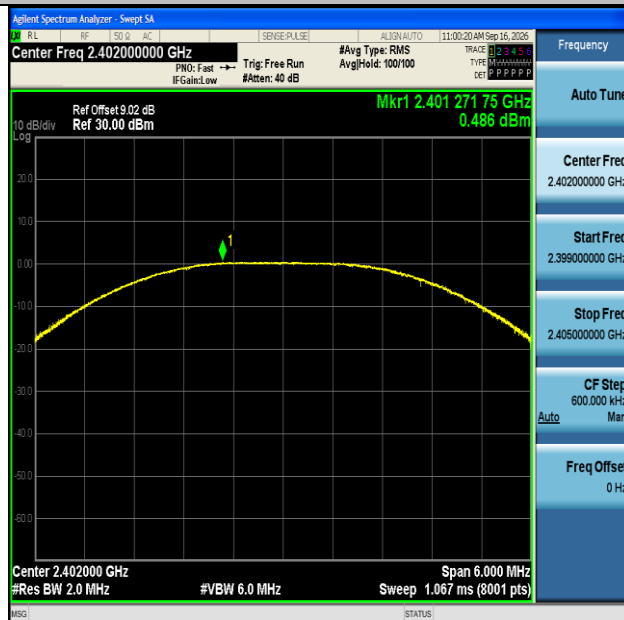


BLE_2M-Ant1-2402-PASS



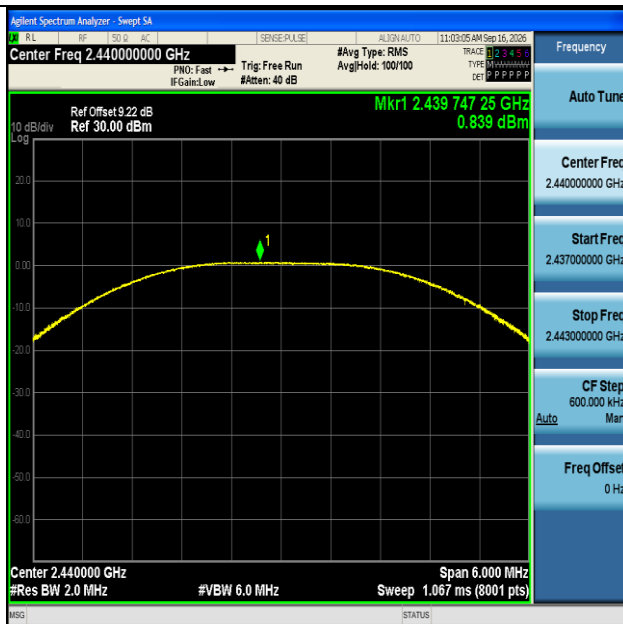

BLE_2M-Ant1-2440-PASS

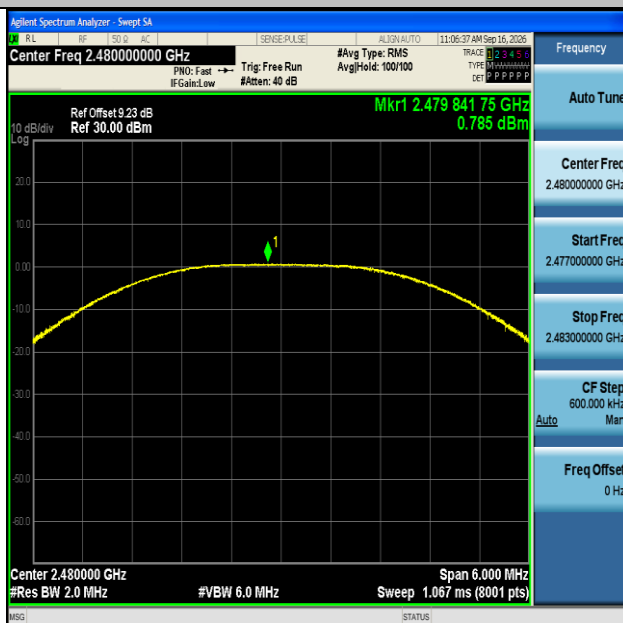

BLE_2M-Ant1-2480-PASS





Appendix D: Maximum peak power spectral density

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-15.50	≤8.00	PASS
BLE_1M	Ant1	2440	-15.11	≤8.00	PASS
BLE_1M	Ant1	2480	-15.27	≤8.00	PASS
BLE_2M	Ant1	2402	-17.52	≤8.00	PASS
BLE_2M	Ant1	2440	-17.18	≤8.00	PASS
BLE_2M	Ant1	2480	-17.38	≤8.00	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

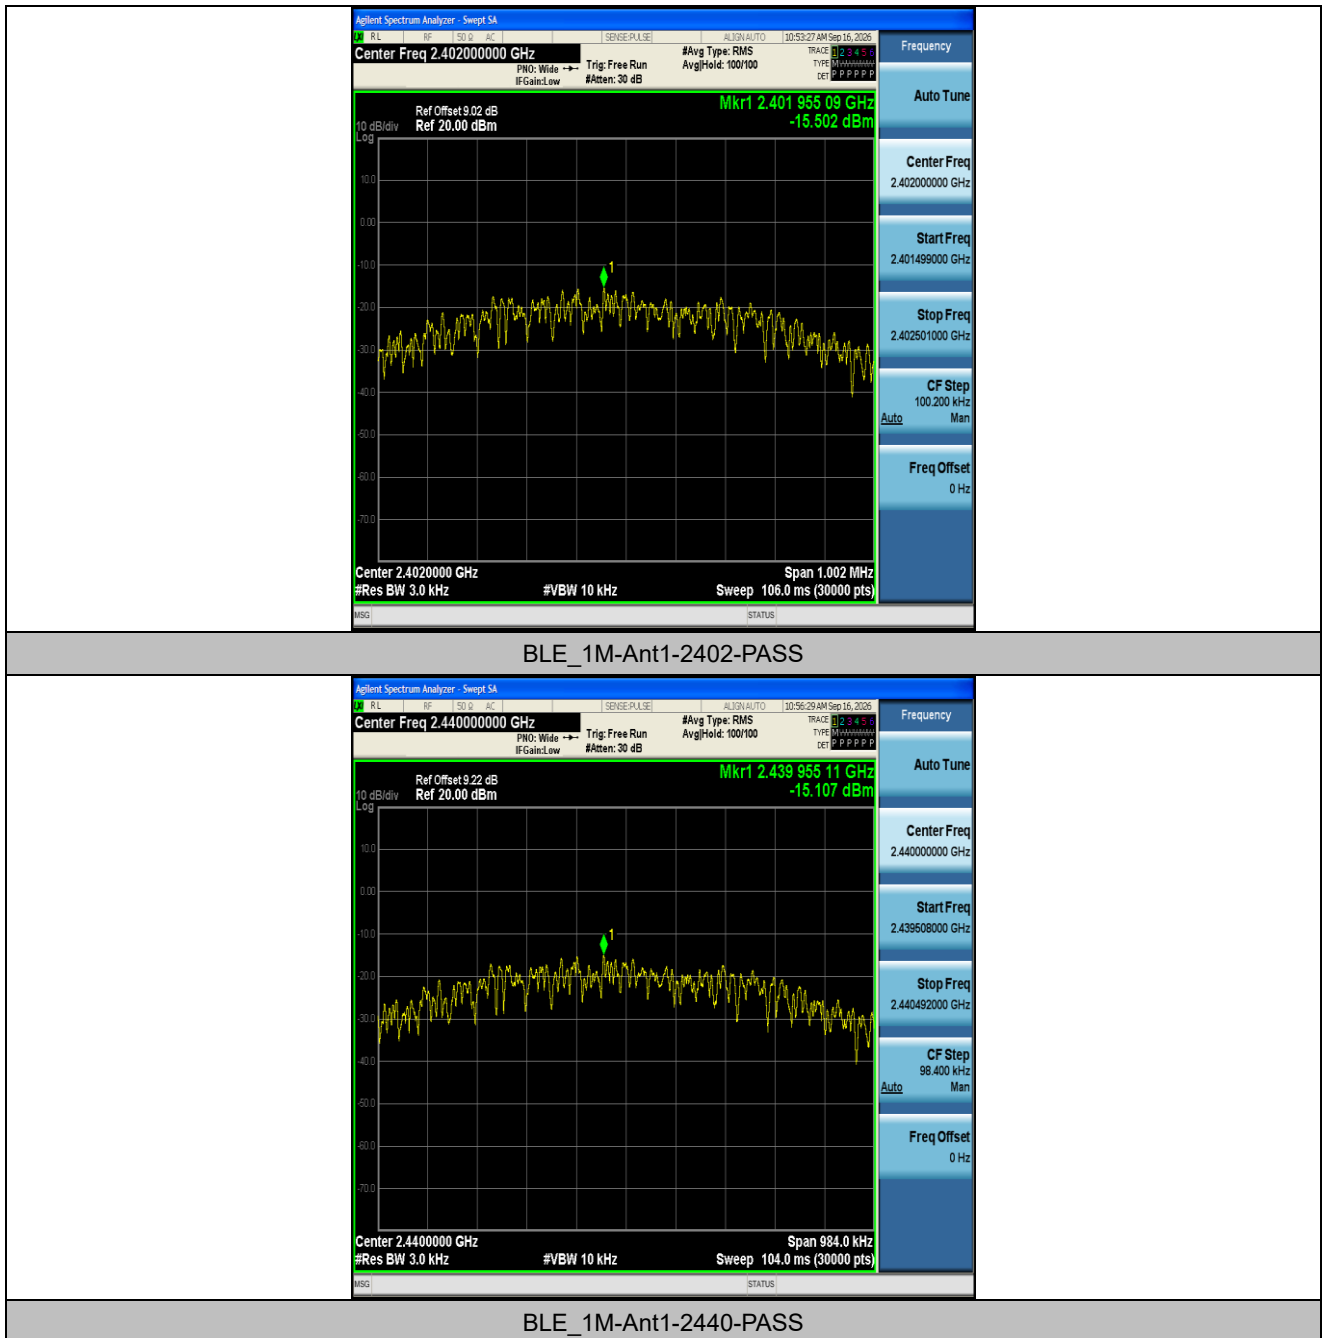

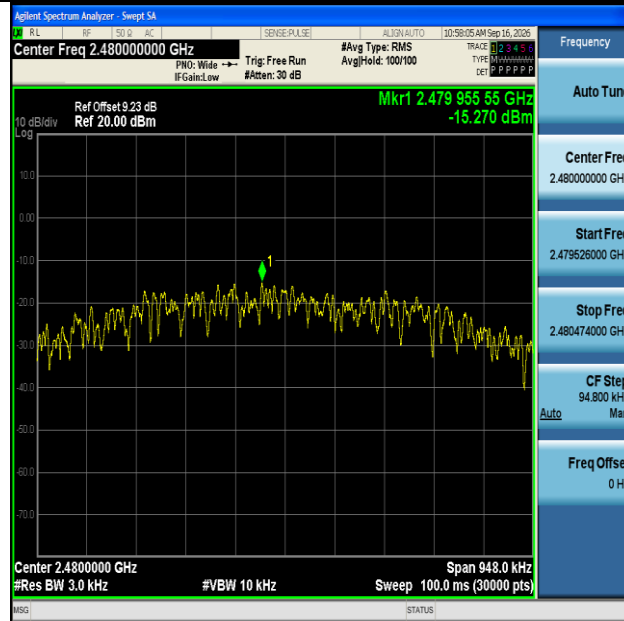


BLE_1M-Ant1-2480-PASS

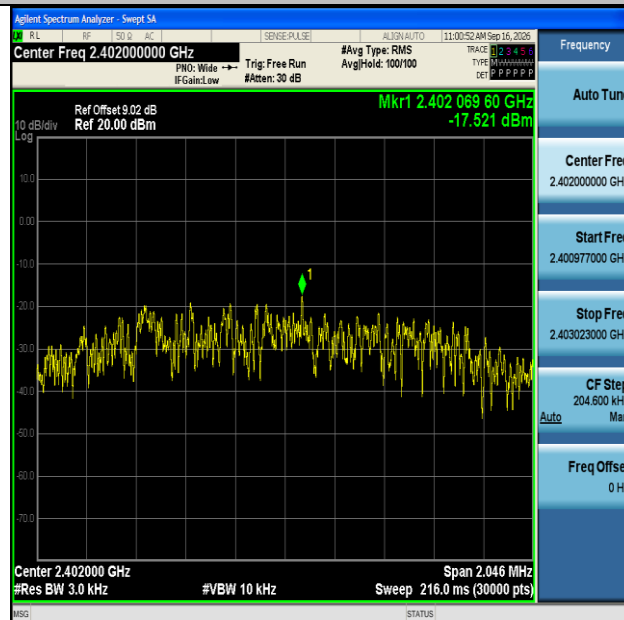


BLE_2M-Ant1-2402-PASS



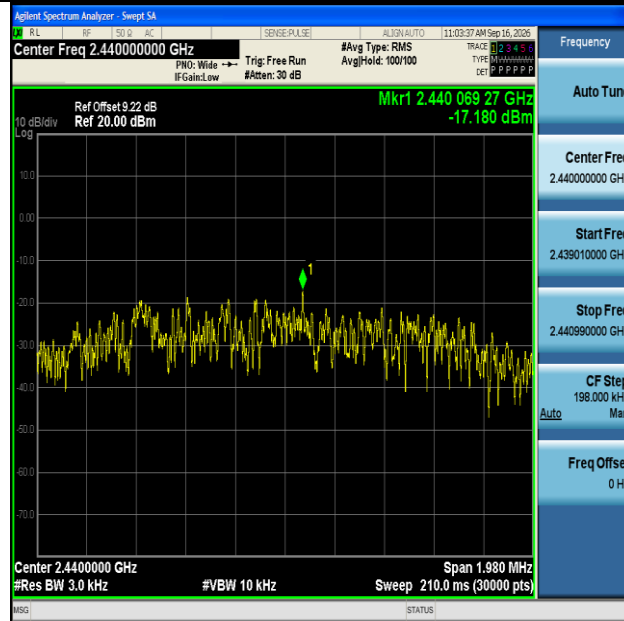

BLE_2M-Ant1-2440-PASS

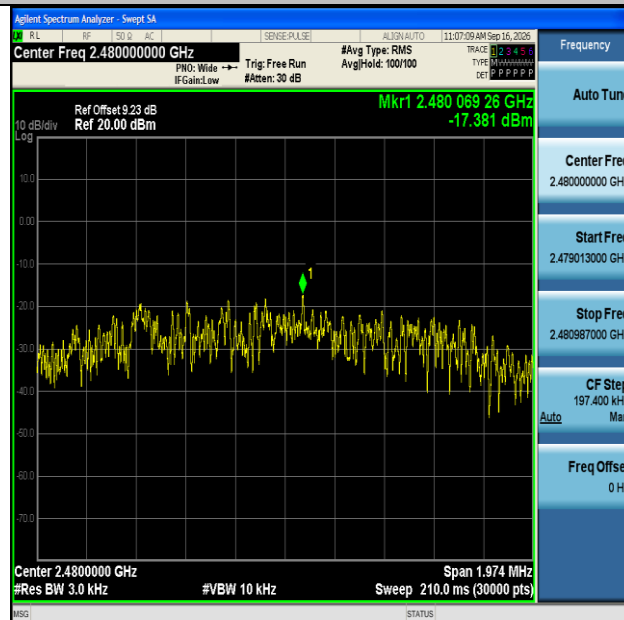

BLE_2M-Ant1-2480-PASS





Appendix E: Band edge measurements

Test Result


Test Mode	Antenna	Ch. Name	Frequency [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.16	-49.1	≤ -20.16	PASS
BLE_1M	Ant1	High	2480	0.23	-48.57	≤ -19.77	PASS
BLE_2M	Ant1	Low	2402	-0.14	-48.78	≤ -20.14	PASS
BLE_2M	Ant1	High	2480	-2.81	-49.43	≤ -22.81	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

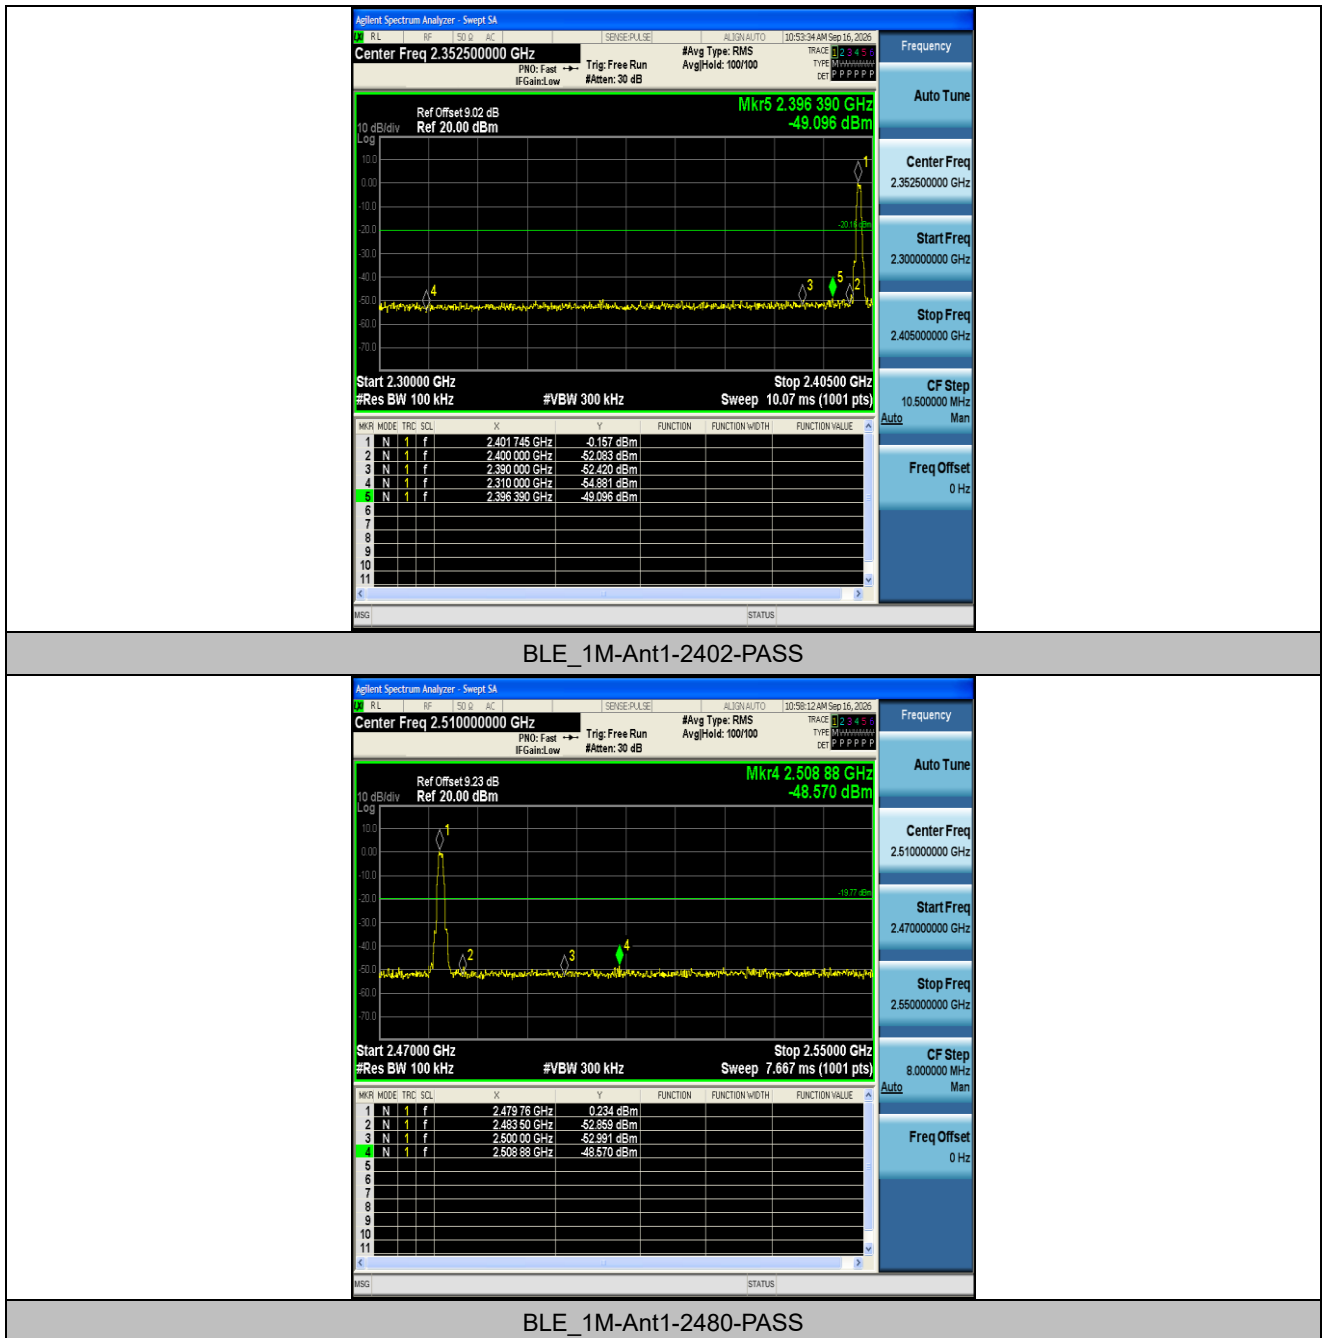

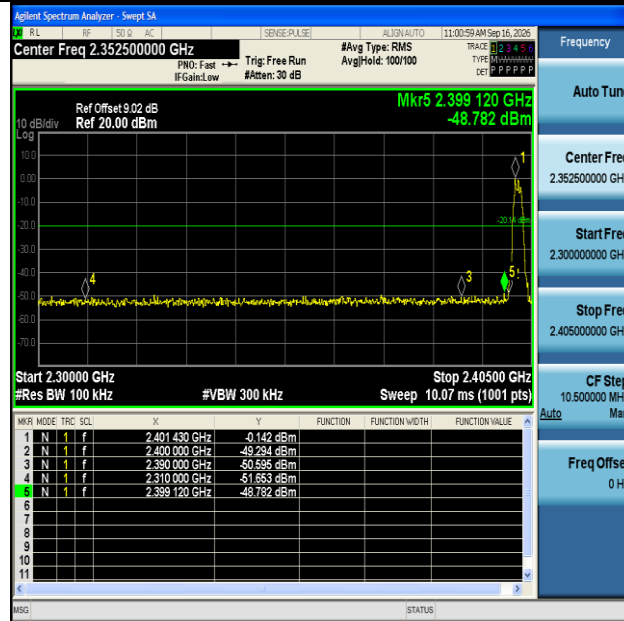

BLE_2M-Ant1-2402-PASS

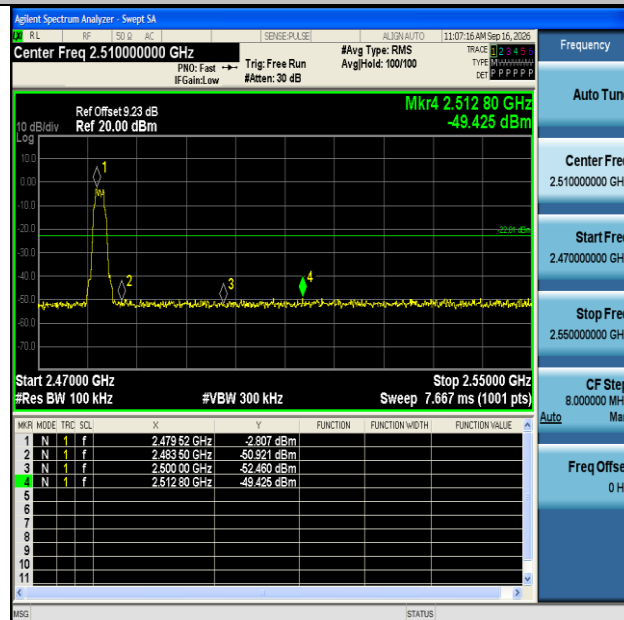

BLE_2M-Ant1-2480-PASS





Appendix F: Conducted Spurious Emission

Test Result


Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	-0.65	-0.65	---	PASS
BLE_1M	Ant1	2402	30~1000	-0.65	-63.22	≤-20.65	PASS
BLE_1M	Ant1	2402	1000~26500	-0.65	-36.84	≤-20.65	PASS
BLE_1M	Ant1	2440	0~Reference	0.26	0.26	---	PASS
BLE_1M	Ant1	2440	30~1000	0.26	-62.51	≤-19.74	PASS
BLE_1M	Ant1	2440	1000~26500	0.26	-37.43	≤-19.74	PASS
BLE_1M	Ant1	2480	0~Reference	0.23	0.23	---	PASS
BLE_1M	Ant1	2480	30~1000	0.23	-63	≤-19.77	PASS
BLE_1M	Ant1	2480	1000~26500	0.23	-37.52	≤-19.77	PASS
BLE_2M	Ant1	2402	0~Reference	-0.20	-0.20	---	PASS
BLE_2M	Ant1	2402	30~1000	-0.20	-63.41	≤-20.2	PASS
BLE_2M	Ant1	2402	1000~26500	-0.20	-36.72	≤-20.2	PASS
BLE_2M	Ant1	2440	0~Reference	0.15	0.15	---	PASS
BLE_2M	Ant1	2440	30~1000	0.15	-61.7	≤-19.85	PASS
BLE_2M	Ant1	2440	1000~26500	0.15	-37.86	≤-19.85	PASS
BLE_2M	Ant1	2480	0~Reference	0.17	0.17	---	PASS
BLE_2M	Ant1	2480	30~1000	0.17	-61.96	≤-19.83	PASS
BLE_2M	Ant1	2480	1000~26500	0.17	-37.21	≤-19.83	PASS

Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.





Test Graphs

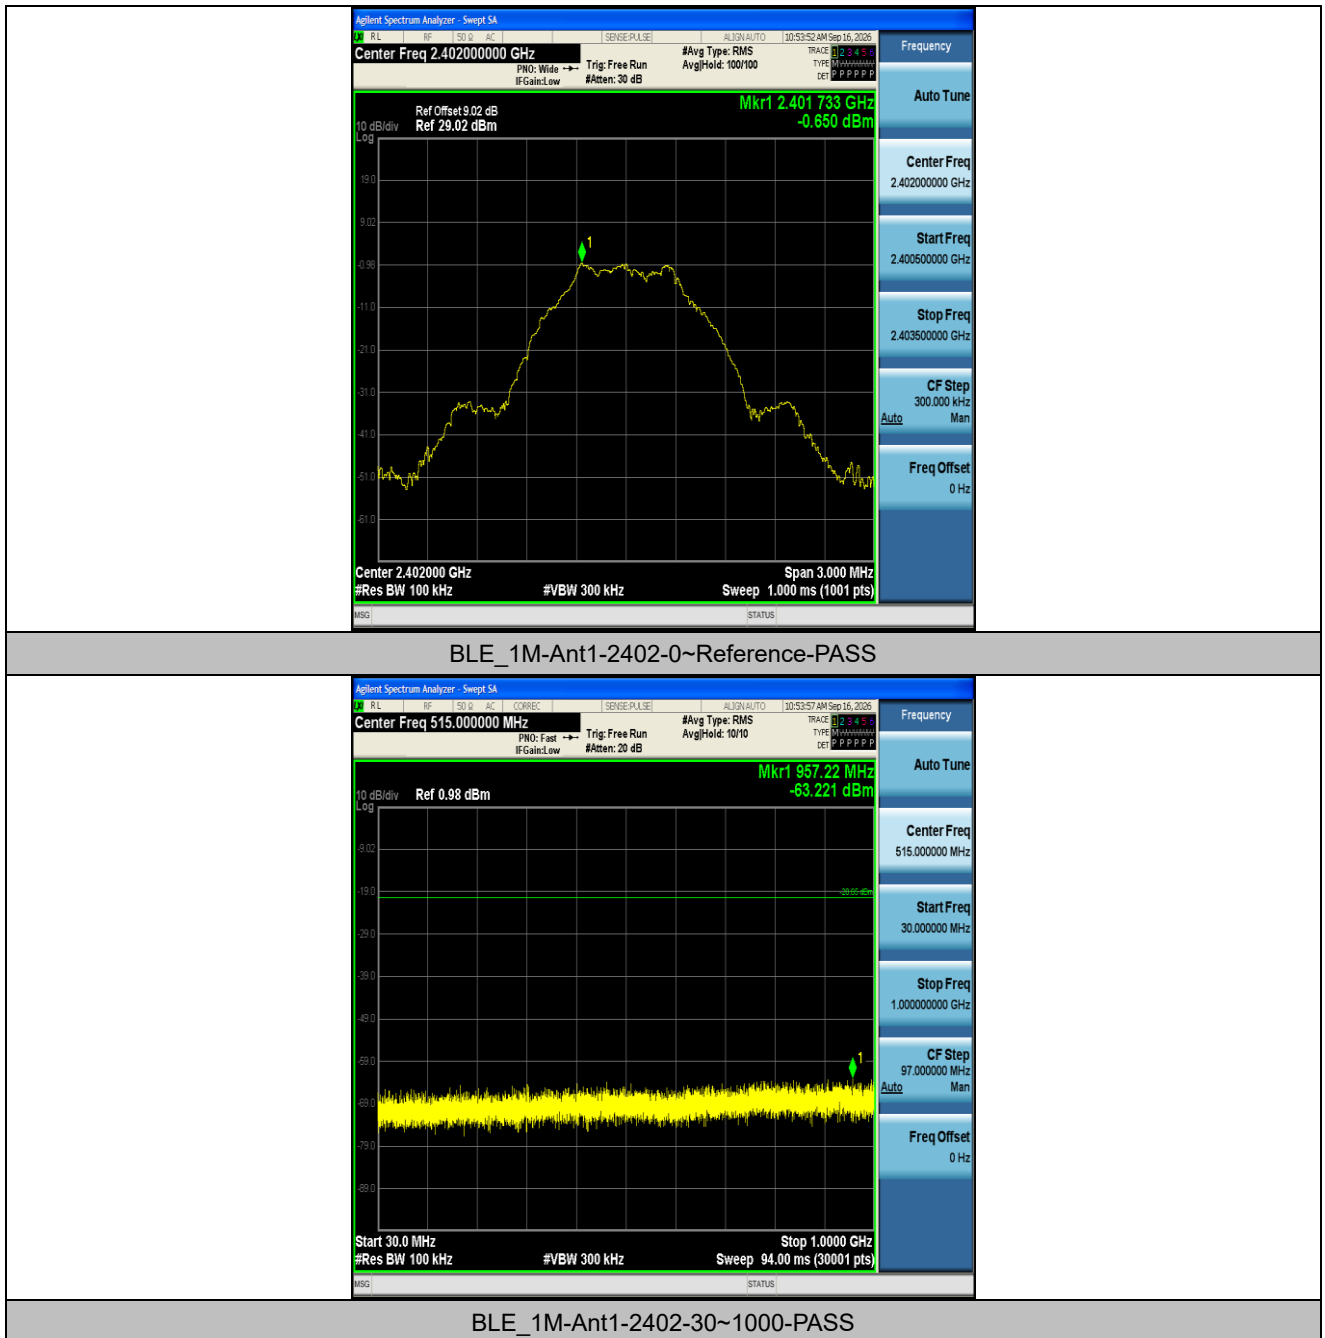




BLE_1M-Ant1-2402-1000~26500-PASS




BLE_1M-Ant1-2440-0~Reference-PASS



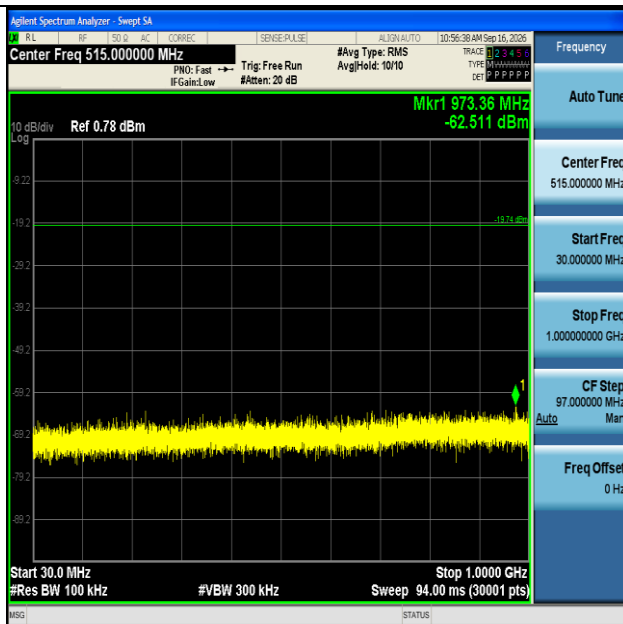

BLE_1M-Ant1-2440-30~1000-PASS

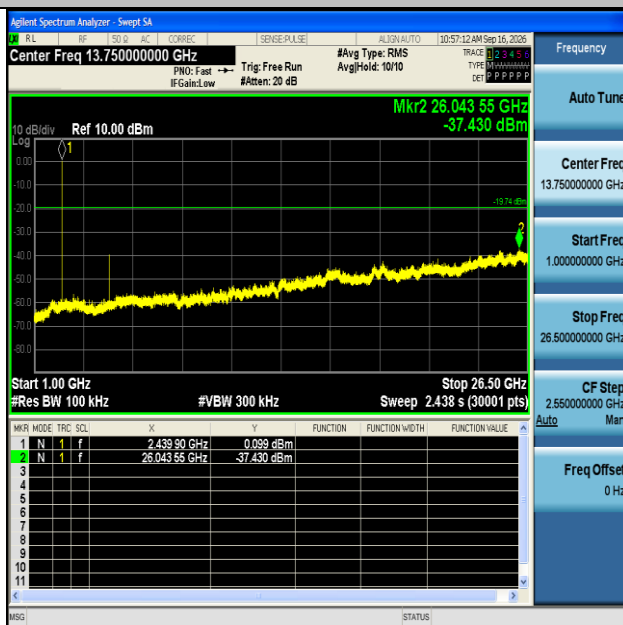


BLE_1M-Ant1-2440-1000~26500-PASS






BLE_1M-Ant1-2480-0~Reference-PASS

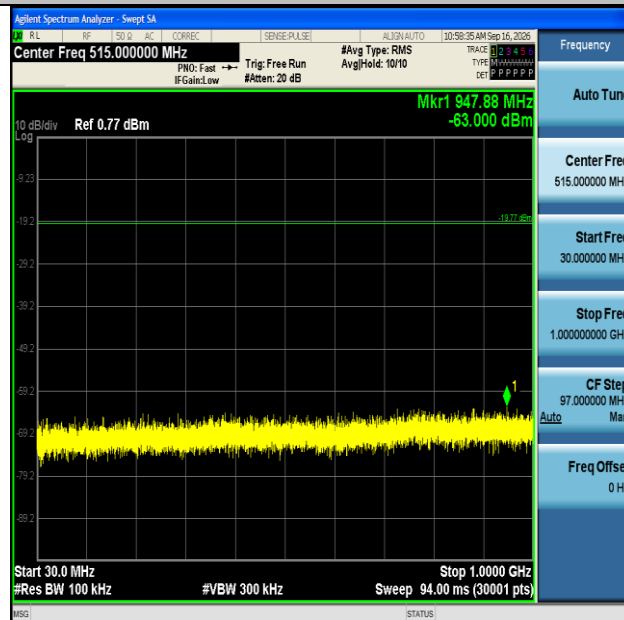


BLE_1M-Ant1-2480-30~1000-PASS



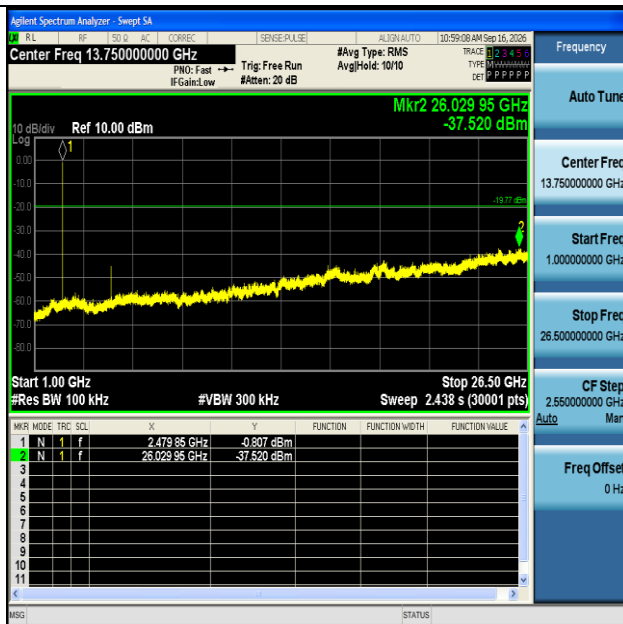


BLE_1M-Ant1-2480-1000~26500-PASS

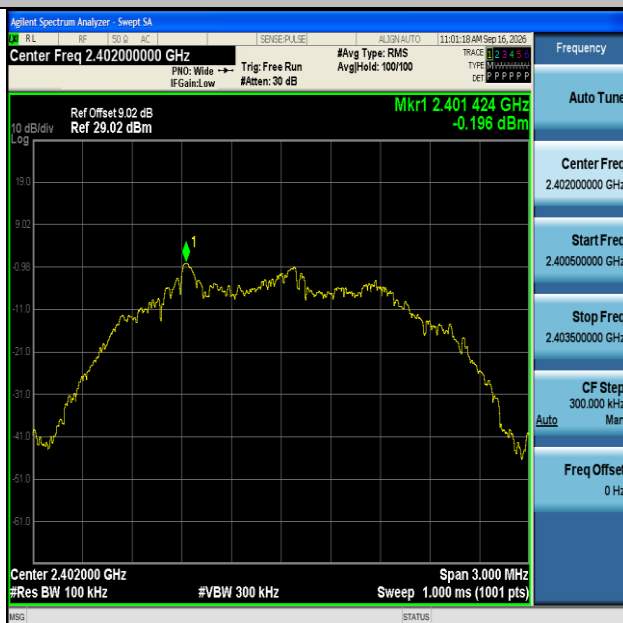


BLE_2M-Ant1-2402-0~Reference-PASS



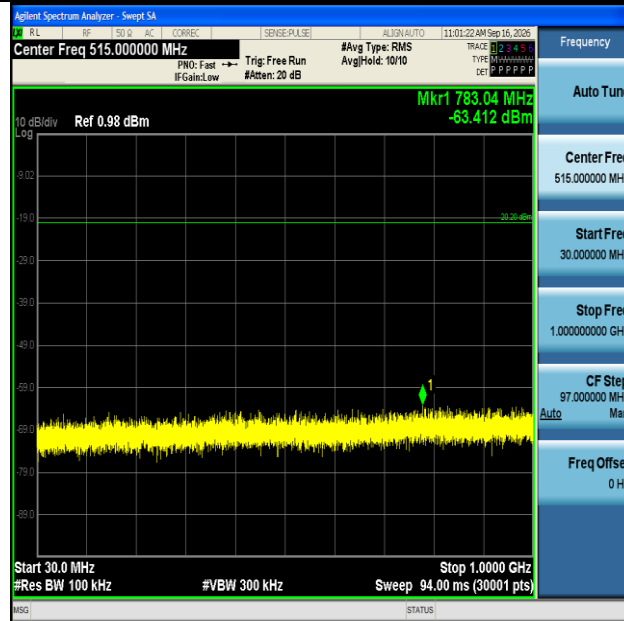

BLE_2M-Ant1-2402-30~1000-PASS

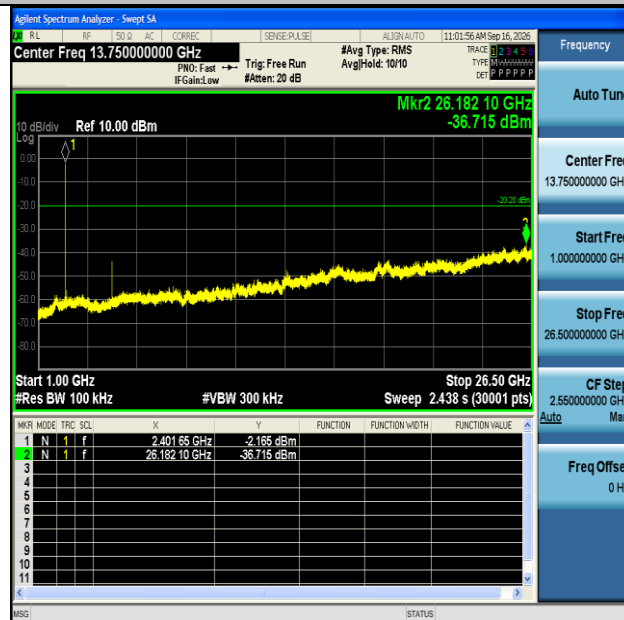


BLE_2M-Ant1-2402-1000~26500-PASS






BLE_2M-Ant1-2440-0~Reference-PASS

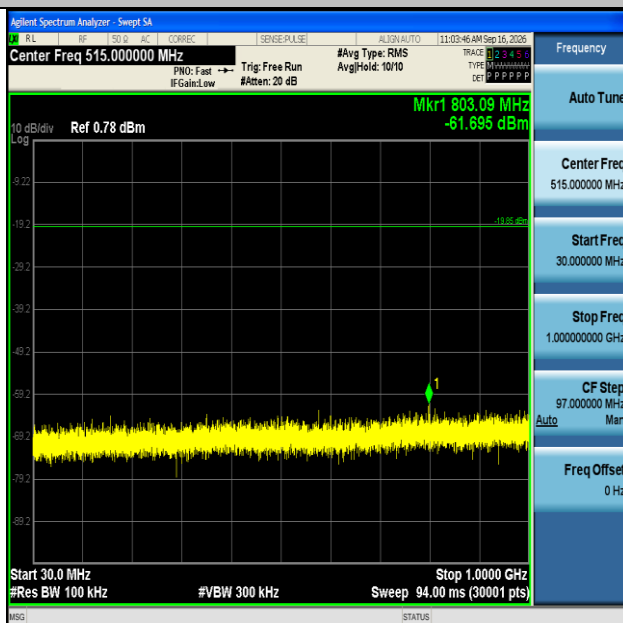

BLE_2M-Ant1-2440-30~1000-PASS



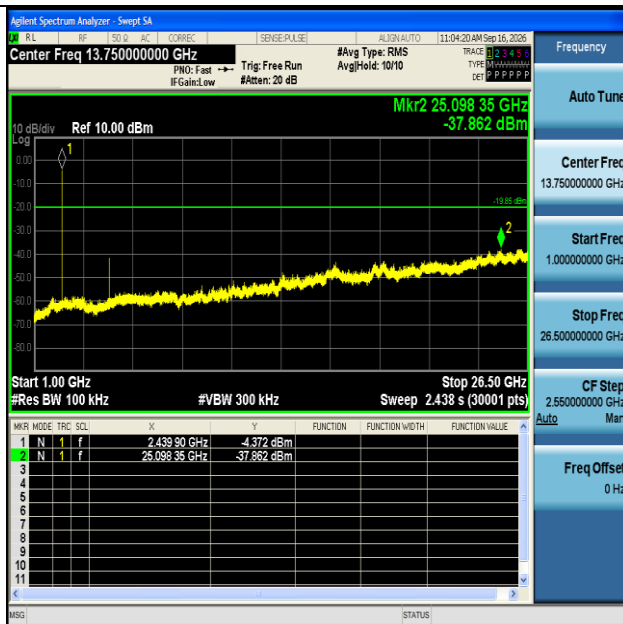


BLE_2M-Ant1-2440-1000~26500-PASS




BLE_2M-Ant1-2480-0~Reference-PASS



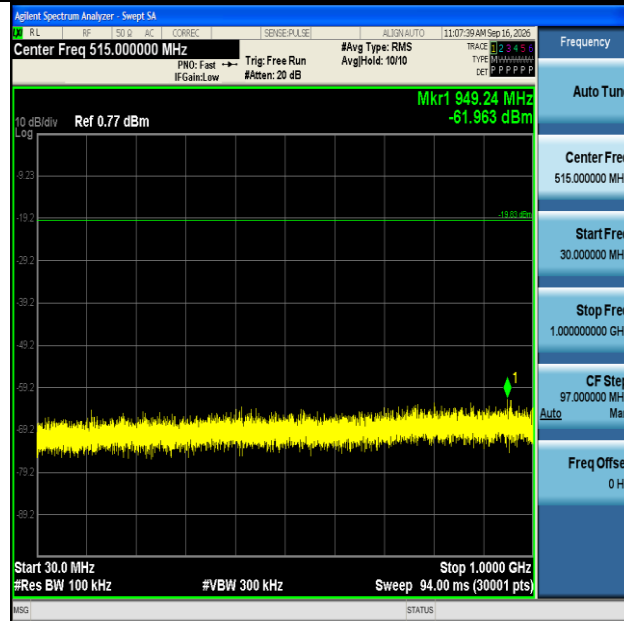

BLE_2M-Ant1-2480-30~1000-PASS

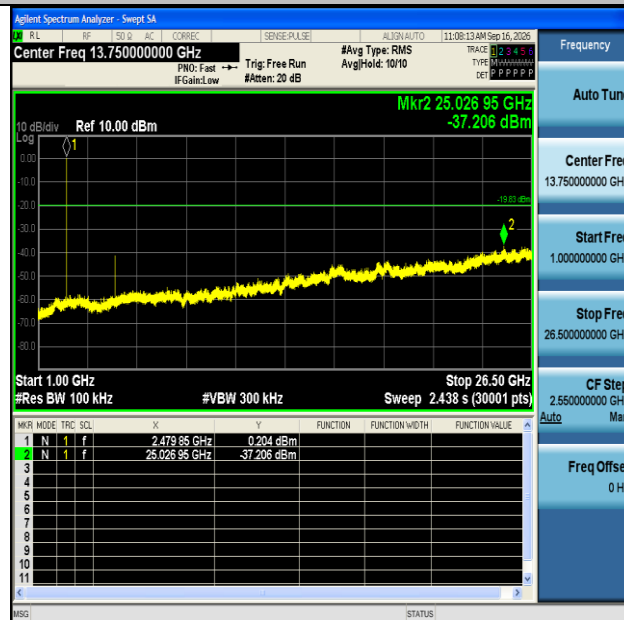

BLE_2M-Ant1-2480-1000~26500-PASS





Appendix G: Duty Cycle

Test Result


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
BLE_1M	Ant1	2402	0.40	0.62	64.52	1.90
BLE_1M	Ant1	2440	0.41	0.63	65.08	1.87
BLE_1M	Ant1	2480	0.41	0.63	65.08	1.87
BLE_2M	Ant1	2402	0.22	0.63	34.92	4.57
BLE_2M	Ant1	2440	0.22	0.63	34.92	4.57
BLE_2M	Ant1	2480	0.22	0.62	35.48	4.50


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

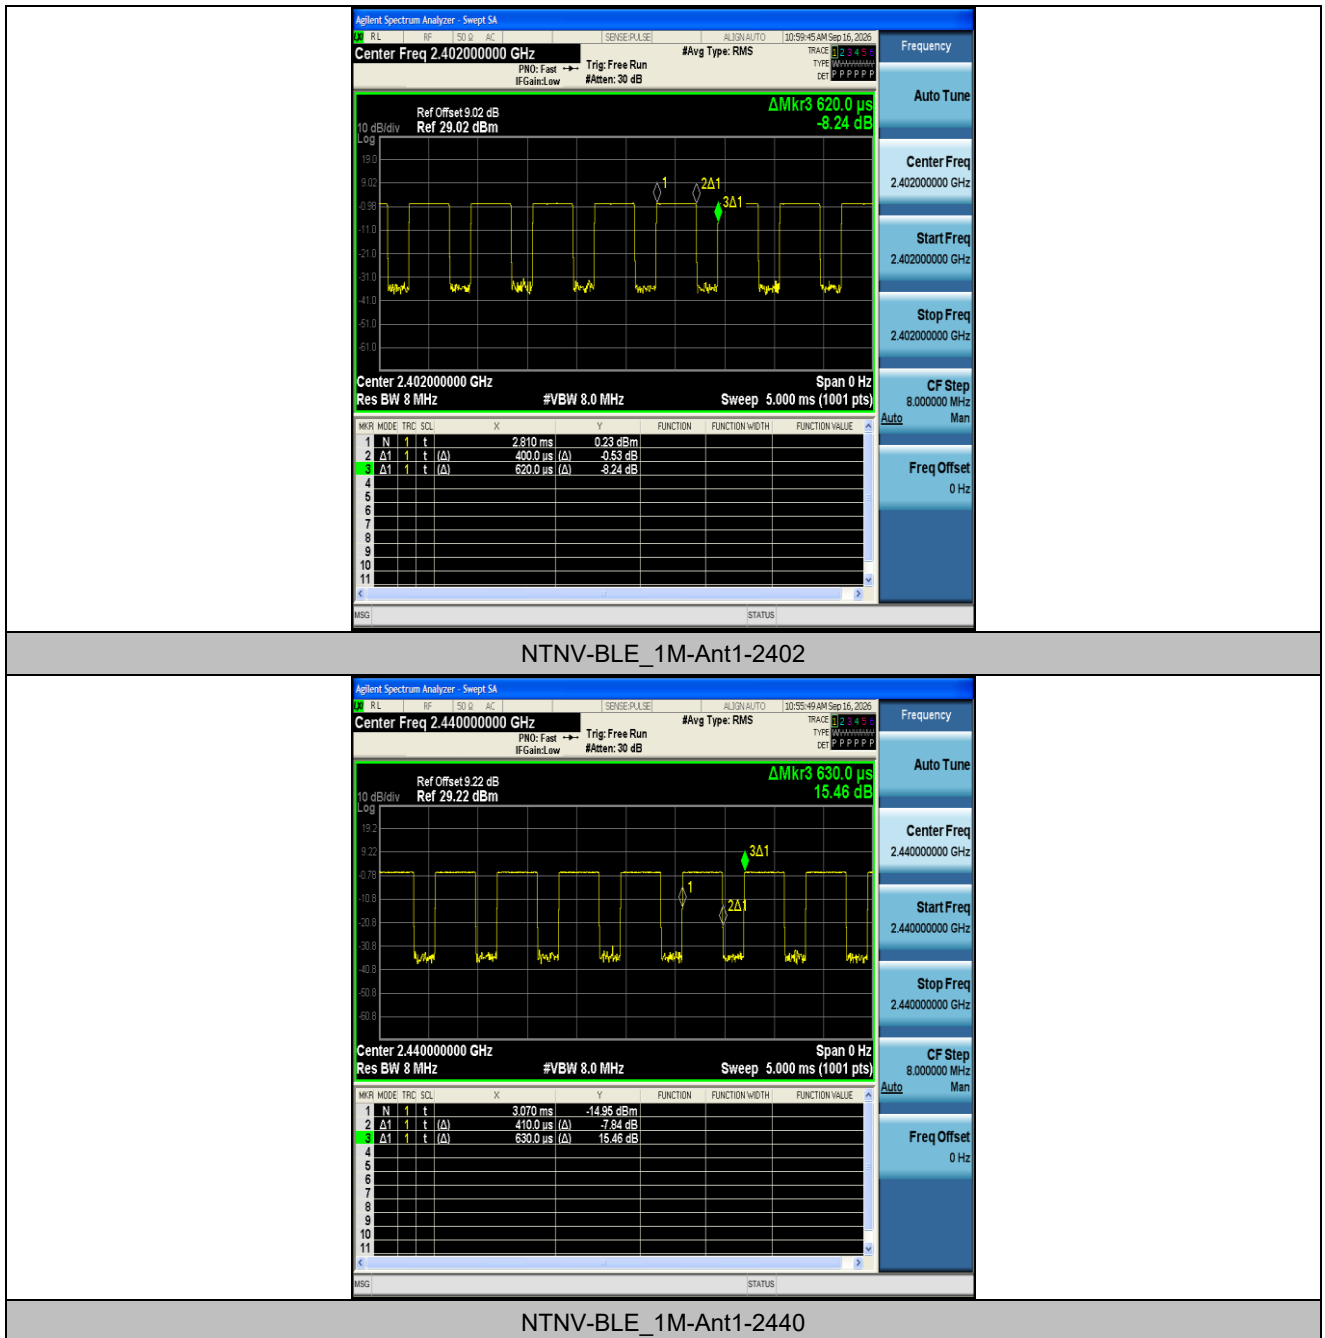

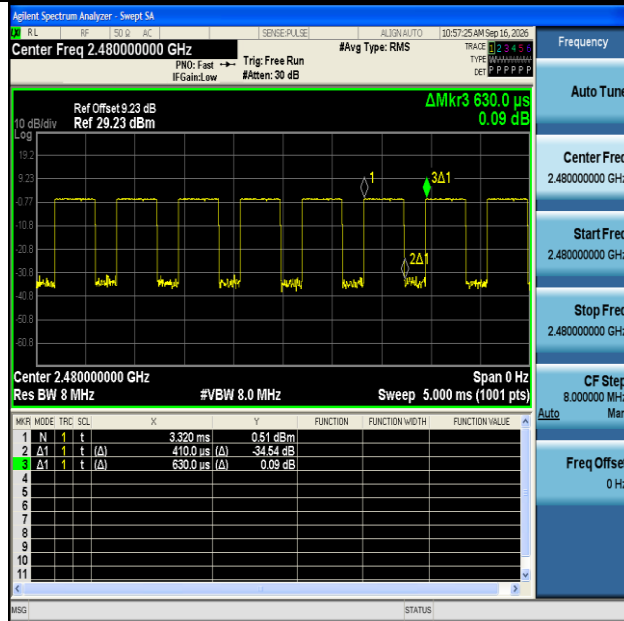


NTNV-BLE_1M-Ant1-2480

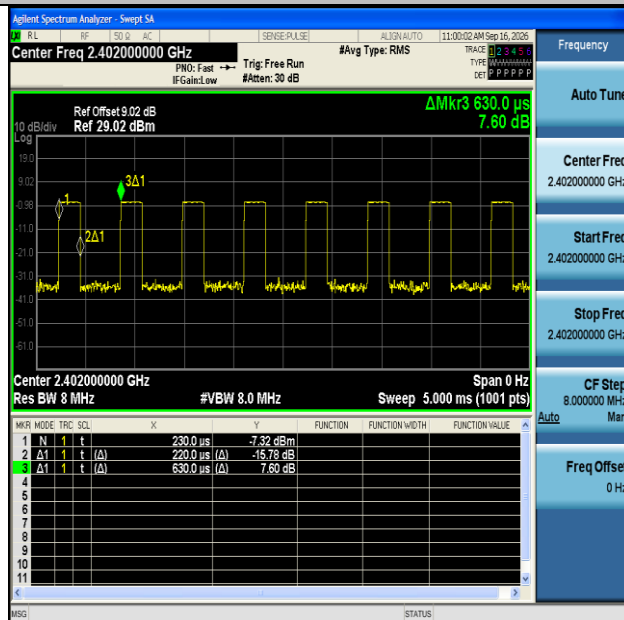


NTNV-BLE_2M-Ant1-2402



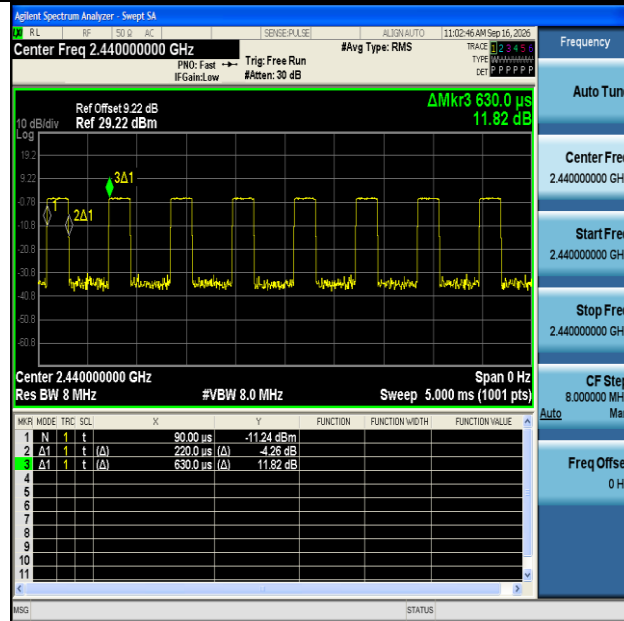

NTNV-BLE_2M-Ant1-2440

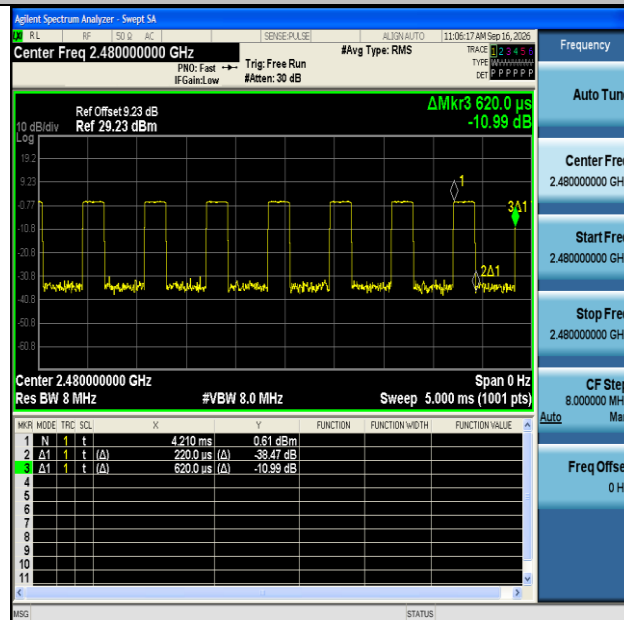

NTNV-BLE_2M-Ant1-2480

