

Prüfbericht - Nr.: 16002795 001

Seite 1 von 17

Test Report No.:

Page 1 of 17

Auftraggeber: Classic Tech Development Ltd.

Client:

11-12/F., YUE XIU IND'L BLDG.
87 HUNG TO ROAD,
KWUN TONG, KOWLOON
HONG KONG

Gegenstand der Prüfung: Transmitter of Wireless Headphone System

Test item:

Bezeichnung:

HP1291

FCC ID:

REDHP1291-001T

Identification:

FCC ID

Wareneingangs-Nr.:

73010798

Eingangsdatum: 30.03.2004

Receipt No.:

Date of receipt:

Prüfart:

Testing location:

Shenzhen Bureau of Quality Technical
Supervision Shenzhen Academy of Metrology
and Quality Inspection
Bldg. of Shenzhen Academy of Metrology and
Quality Inspection, Longzhu Road, Nanshan,
Shenzhen,
P.R. China

Listed test laboratory
according to FCC rules
section 2.948 for
measuring devices under
Parts 15

Prüfgrundlage:

Test specification:

ANSI C63.4:2001

Conduct Emissions with limits described at FCC Part 15 subpart C section 15.207

Radiated Emissions with limits described at FCC Part 15 Subpart C section 15.209 and 15.249

Prüfergebnis:

Test Result:

Der vorstehend beschriebene Prüfgegenstand wurde geprüft und entspricht oben genannter Prüfgrundlage.
The a. m. test item passed.

Prüflaboratorium/ Testing Laboratory:

zusammengestellt/ compiled by:

kontrolliert/ checked by:


12.04.2004

Yuxin Huang



13.04.2004

Dave Xie



*Datum
Date*

*Name
Name*

*Unterschrift
Signature*

*Datum
Date*

*Name
Name*

*Unterschrift
Signature*

Sonstiges/ Other Aspects:

Abkürzungen: ok / P = entspricht Prüfgrundlage
fail / F = entspricht nicht Prüfgrundlage
n.a. / N = nicht anwendbar

Abbreviations: ok / P = passed
fail / F = failed
n.a. / N = not applicable

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 2 von 17
Page 2 of 17

TEST SUMMARY

5.1 CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.207(A)

RESULT: ok

5.2 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.209(A)

RESULT: ok

5.3 FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.249(A)

RESULT: ok

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 3 von 17
Page 3 of 17

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACE ABILITY.....	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	6
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	8
4.2	TEST OPERATION AND TEST SOFTWARE.....	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
4.5	TEST SET-UP.....	9
5	TEST RESULTS EMISSION	11
5.1	CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.207(A).....	11
5.2	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.209(A).....	12
5.3	FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.249(A).....	13
6	PHOTOGRAPHS OF THE TEST SET-UP	14
7	LIST OF TABLES.....	17
8	LIST OF PHOTOGRAPHS.....	17

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 4 von 17
Page 4 of 17

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

Shenzhen SMQ

Shenzhen Bureau of Quality Technical Supervision
Shenzhen Academy of Metrology and Quality Inspection
Bldg, of Shenzhen Academy of Metrology and Quality Inspection
Longzhu Road, Nanshan, Shenzhen,
P.R. China

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 5 von 17
Page 5 of 17

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Antenna	Chase	CBL6112B	2591	29.01.2005
Horn Antenna	Rohde & Schwarz	HF906	100014	29.01.2005
3m Semi-anechoic chamber	Albatross Projects	9X6X6	---	29.01.2005
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	29.01.2005
Communications Test Set	Rohde & Schwarz	CMU200	1100.0008.02	29.01.2005
Communications Test Set	HP	HP8920A	3438A05187	29.01.2005
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	29.01.2005
AMN	Rohde & Schwarz	ESH3-Z5	100002	29.01.2005

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 6 von 17
Page 6 of 17

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for conducted emissions measurements is ± 3 dB.
The estimated combined standard uncertainty for radiated emissions measurements is ± 3 dB.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

Shenzhen Bureau of Quality Technical Supervision, Shenzhen Academy of Metrology and Quality Inspection, Bldg. of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R.China is listed on the US Federal Communications Commission list of facilities approved to perform measurements

3 General Product Information

Brief description of the test sample:

The submitted sample is 900MHz transmitter for a wireless headphone system with three channels available. Stereo audio signal input to the audio-in port of the sample and modulated as a FM signal for transition. 19kHz pilot signal is also included in the RF signal as complete FM transmission. The antenna type is integrated.

Prüfbericht - Nr.: 16002795 001

Test Report No.:

Seite 7 von 17

Page 7 of 17

3.1 Product Function and Intended Use

For details, refer to technical document and the user manual.

3.2 Ratings and System Details

Frequency range	:	911.98MHz, 912.48MHz, 912.98MHz
Number of channels	:	3 channels
Type of antenna	:	Integral antenna
FCC ID	:	REDHP1291-001T
Power supply	:	AC/DC adaptor input
Ports	:	Audio input 12.5V DC input
RF Power level		<50 mV/m
Protection Class	:	III

Refer to the technical document for further information

3.3 Independent Operation Modes

The basic operation modes are:

Transmitting and standby

For further information refer to User Manual

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 8 von 17
Page 8 of 17

3.4 Submitted Documents

Block Diagram
Circuit Diagram
Components List
PCB layout
FCC label
User Manual
Photo document

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment


The product has been tested together with the following AC/DC Adaptor:

Model	: PA-1215-DUA
Input	: AC 120V 60Hz
Output	: DC 12.5V / 150mA
Protection class	: II

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

Diagram 1 of Measurement Equipment Configuration for Testing Conducted Emission

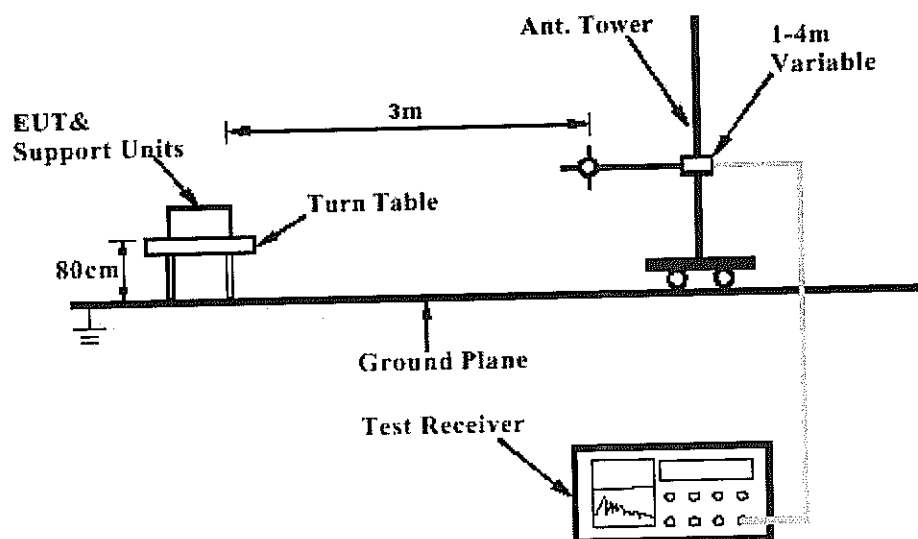

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 10 von 17
Page 10 of 17

Diagram 3 of Equipment Configuration for Testing Conducted Emission


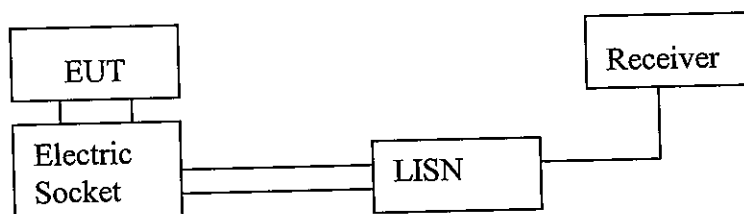


Diagram 4 of Equipment Configuration for Testing Radiated Emission

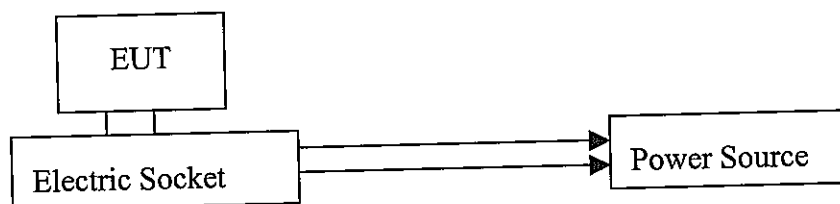

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 11 von 17
Page 11 of 17

5 Test Results EMISSION

5.1 Conducted Emission for FCC Part 15 Per Section 15.207(a)

RESULT:

ok

Date of testing : 06.04.2004
Test specification : FCC Part 15 Per Section 15.207(a)
Limits : FCC Part 15 Per Section 15.207(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : Shielded room
Operation mode : Transmitting at channel 2
Temperature : 22°C
Humidity : 67%

If the result of the measurement with the Quasi Peak detector is below the Average limit, the measurement with Average Detector has been omitted.
Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 2: Disturbance Voltage on AC Mains

Frequency [MHz]	Line	QP [dBμV]	AV [dBμV]	Quasi Peak Limit [dBμV]	Average Limit [dBμV]
---	*				

*) The disturbance measured is far below the limit and therefore, no final measurement was performed.

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 12 von 17
Page 12 of 17

5.2 Radiated Emission for FCC Part 15 Per Section 15.209(a)

RESULT:

ok

Date of testing : 06.04.2004
Test specification : FCC Part 15 Per Section 15.209(a)
Limits : FCC Part 15 Per Section 15.209(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Transmitting at channel 2
Temperature : 21°C
Humidity : 62%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 3: Radiated Emission

Frequency [MHz]	QP [dB μ V]	AV [dB μ V]	Polarity	Limit [dB μ V]
---	*			

*) The disturbance measured is far below the limit and therefore, no final measurement was performed.

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 13 von 17
Page 13 of 17

5.3 Fundamental and harmonics Radiated Emission for FCC Part 15 Per Section 15.249(a)

RESULT:

ok

Date of testing : 06.04.2004
Test specification : FCC Part 15 Per Section 15.249(a)
Limits : FCC Part 15 Per Section 15.249(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Transmitting at channel 2
Temperature : 21°C
Humidity : 62%

Measurement was performed with unmodulated signal.

Polarization of the measurement for the larger power level: Vertical

Test conditions		Fundamental Frequency	
		Channel 2 (912.543MHz)	
T _{nom} (21°C)	Unit	(dBμV/m)	(mV/m)
	Horizontal	83.20	14.45
	Vertical	85.14	18.07
limit		93.979	50

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.



The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 14 von 17
Page 14 of 17

6 Photographs of the Test Set-Up



Photograph 1: Set-up for Conducted Emission on AC Mains

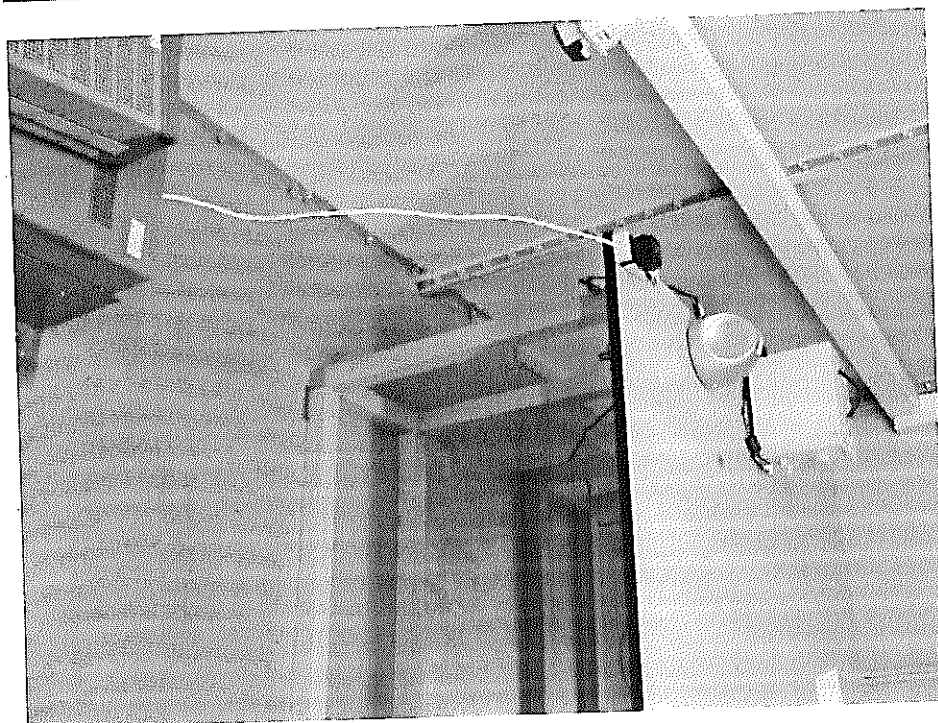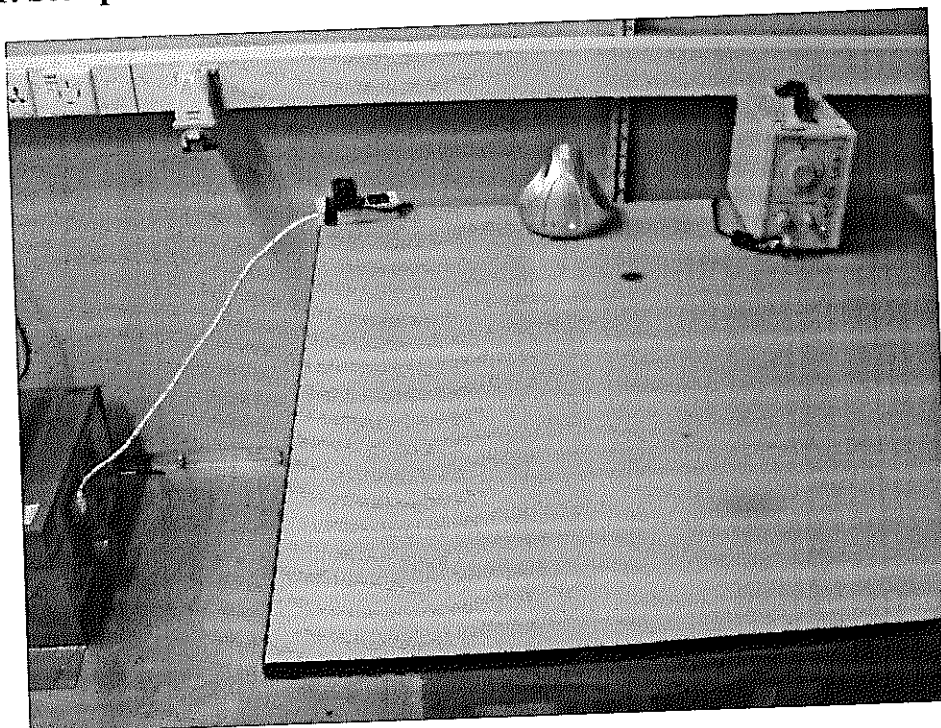

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 15 von 17
Page 15 of 17


Photograph 2: Set-up for Radiation Measurement Below 1GHz

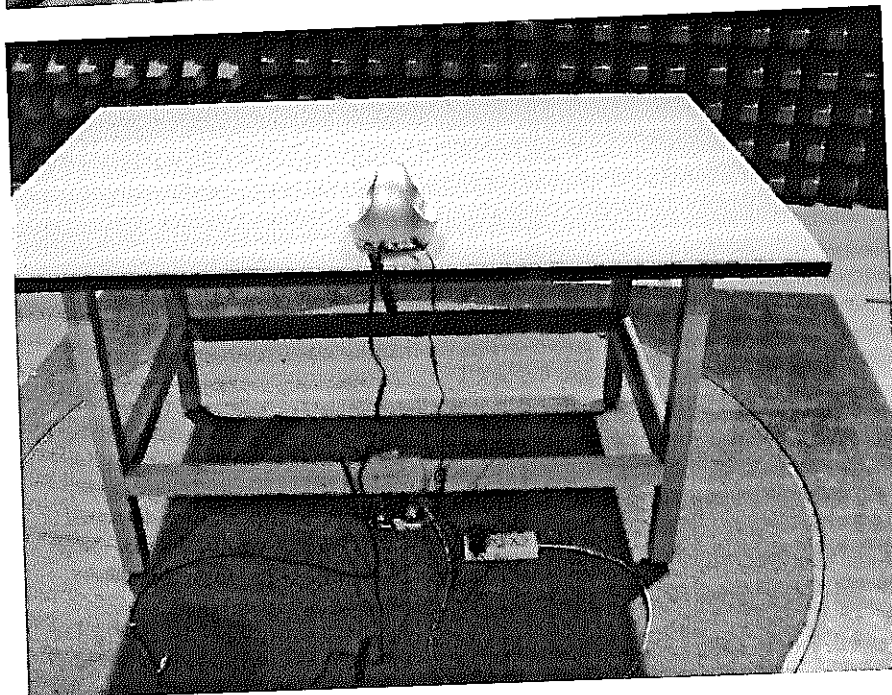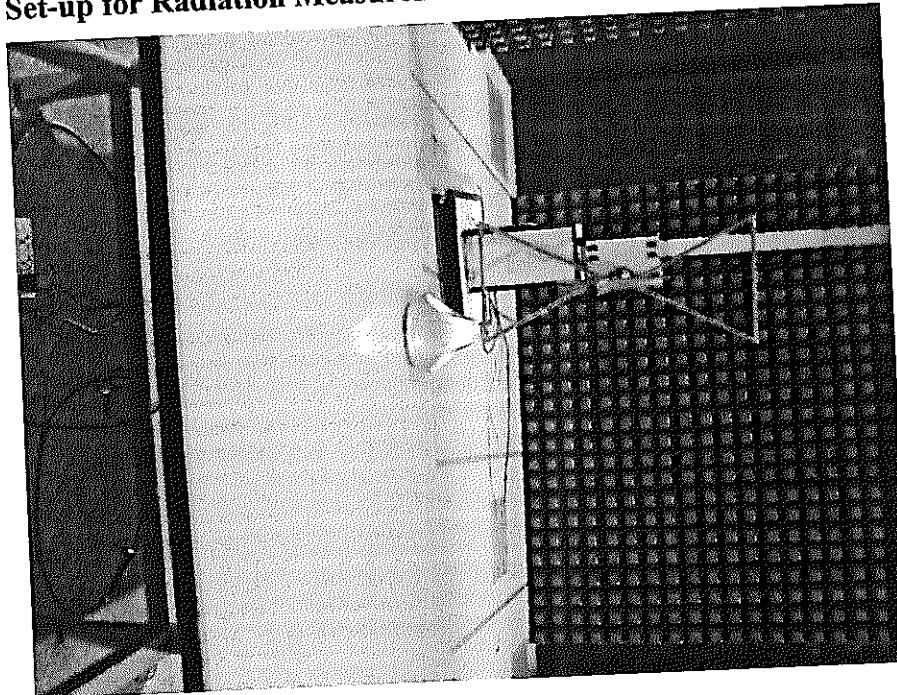

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 16 von 17
Page 16 of 17

Photograph 3: Set-up for Radiation Measurement Above 1GHz

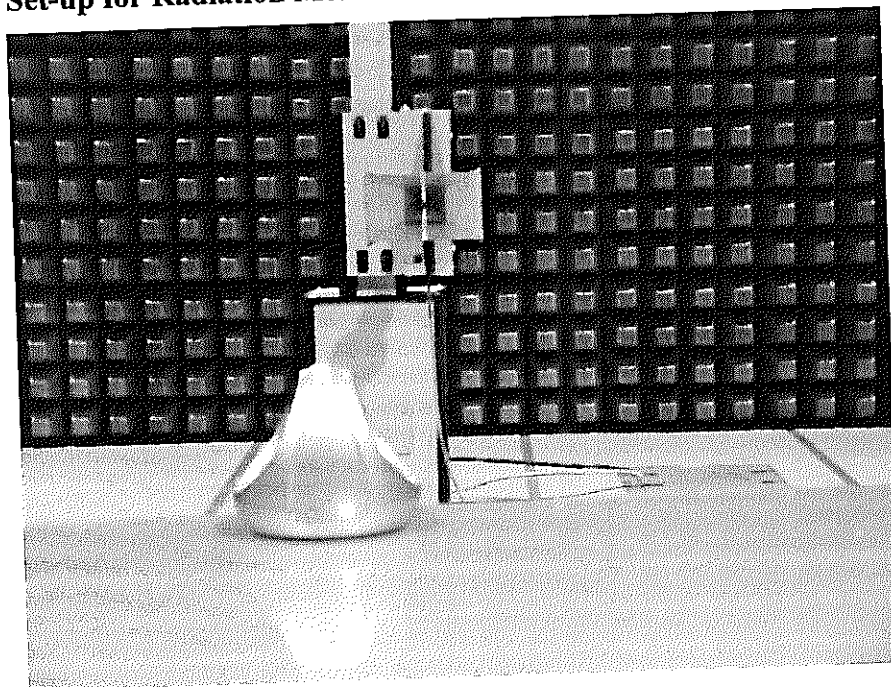

Prüfbericht - Nr.: 16002795 001
Test Report No.:

Seite 17 von 17
Page 17 of 17

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Disturbance Voltage on AC Mains.....	11
Table 3: Radiated Emission.....	12

8 List of Photographs

Photograph 1: Set-up for Conducted Emission on AC Mains	14
Photograph 2: Set-up for Radiation Measurement Below 1GHz	15
Photograph 3: Set-up for Radiation Measurement Above 1GHz.....	16

Prüfbericht - Nr.: 16002795 001


Test Report No.:

Seite 1 von 8

Page 1 of 8

~~Conducted Disturbance~~

EUT: M/N: HP1191 HP1291 *12.06.04.*
Op Cond: Channel 2
Test Spec: L
Comment: AC 120V/60Hz
Tem: 22C Hum: 67%
Date: 06. Apr 04 14:17

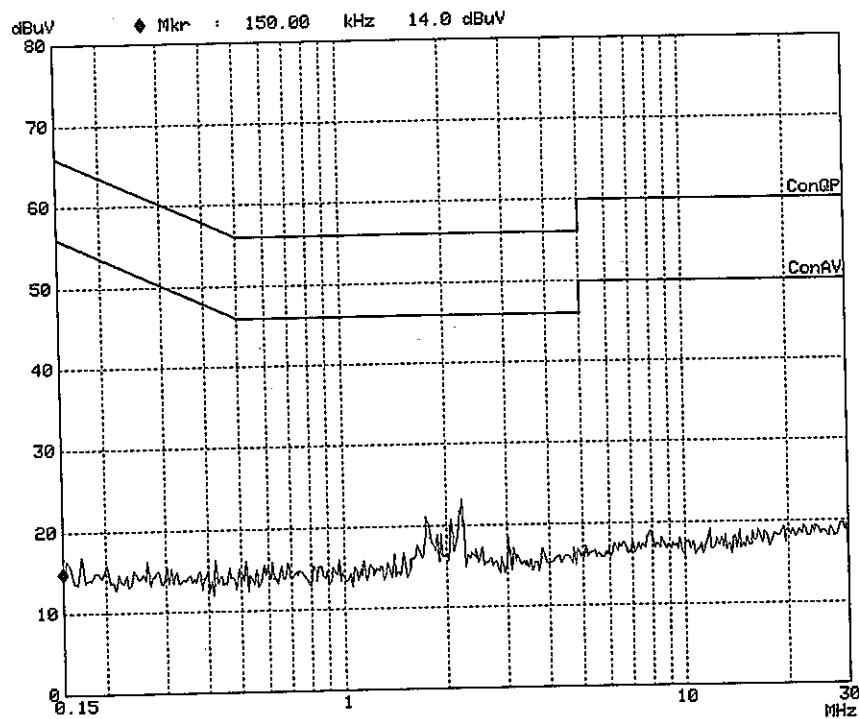

Prüfbericht - Nr.: 16002795 001


Test Report No.:

Seite 2 von 8

Page 2 of 8

Conducted Disturbance

EUT: M/N: HP1191 HP1291
Op Cond: Channel 2
Test Spec: N
Comment: AC 120V/60Hz
Tem: 22C Hum: 67%
Date: 06. Apr 04 14:13

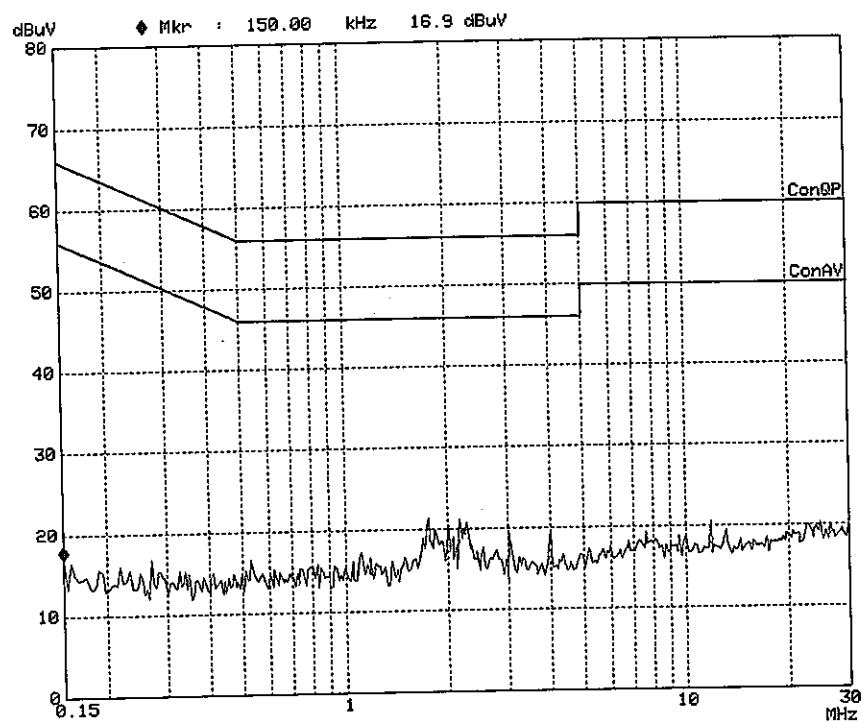

Prüfbericht - Nr.: 16002795 001

Test Report No.:

Seite 3 von 8

Page 3 of 8

Radiated Disturbance

FCC ClassB

EUT:

Manufacturer:

Operating Condition: Channel2

Test Site: SMQ EMC Lab.SAC


Test Specification:

Comment: Vertical

Comment: AC 120V/60Hz

M/N: HP1191 (HP1291)

12.02.04.

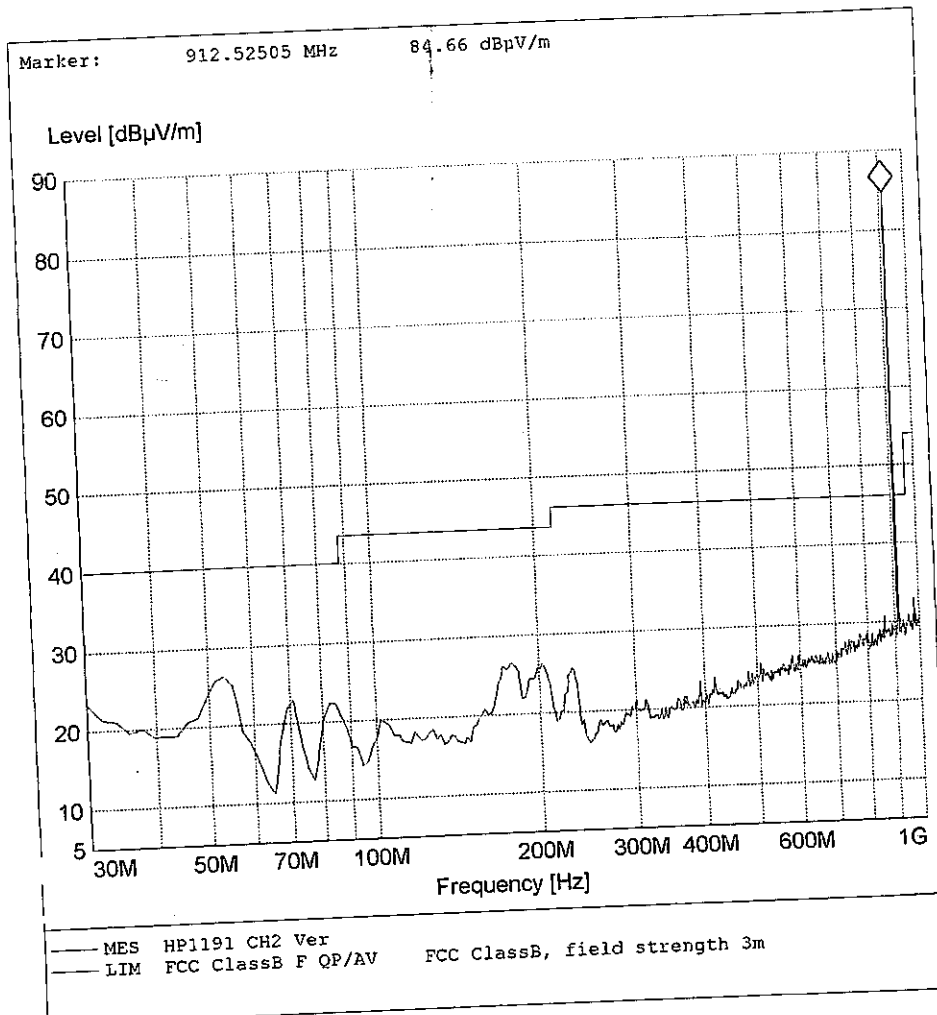

Prüfbericht - Nr.: 16002795 001

Test Report No.:

Seite 4 von 8

Page 4 of 8

Radiated Disturbance

FCC ClassB

EUT:

Manufacturer:

Operating Condition: Channel2

Test Site: SMQ EMC Lab.SAC


Test Specification:

Comment: Horizontal

Comment: AC 120V/60Hz

M/N: ~~HP1191~~ HP1291

2.06.04

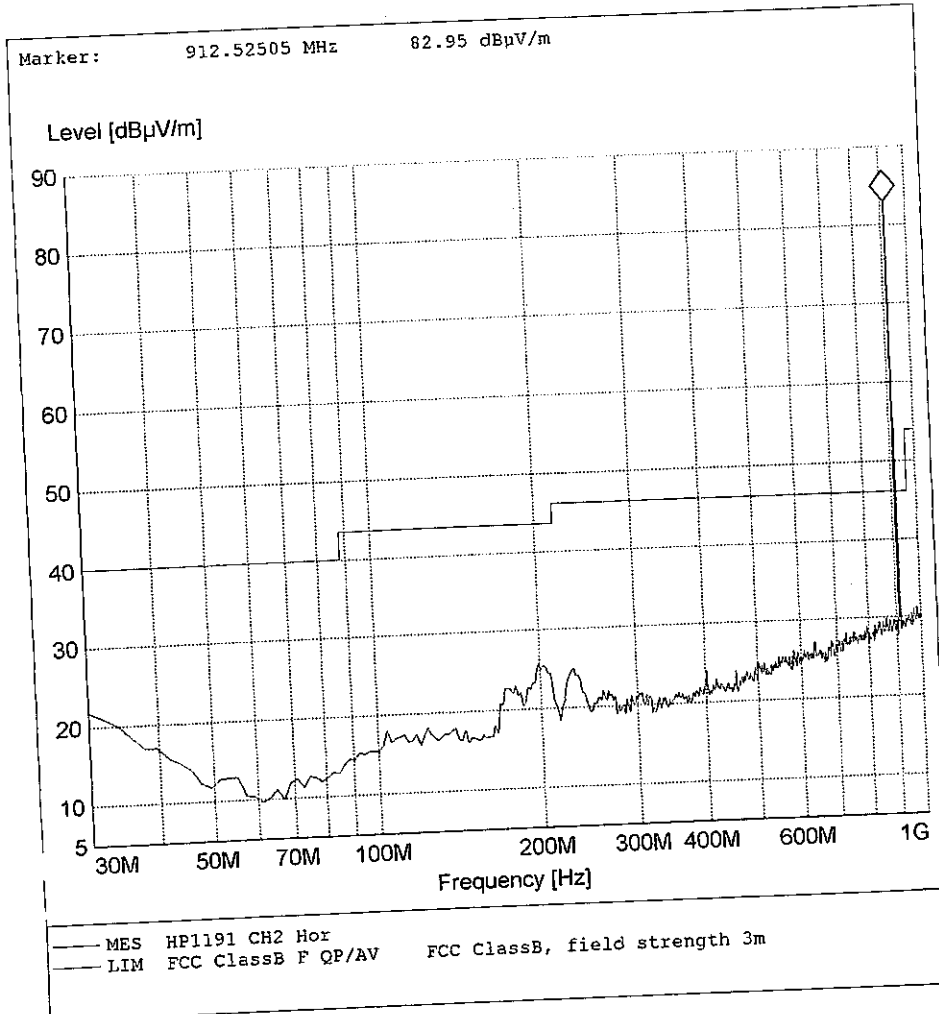

Prüfbericht - Nr.: 16002795 001


Test Report No.:

Seite 5 von 8


Page 5 of 8

Radiated Spurious

FCC ClassB

EUT: M/N: ~~HP1191~~ HP1291
Manufacturer: 
Operating Condition: Channel2
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Horizontal
Comment: AC 120V/60Hz

Marker: 3.651302605 GHz 35.6 dBμV/m

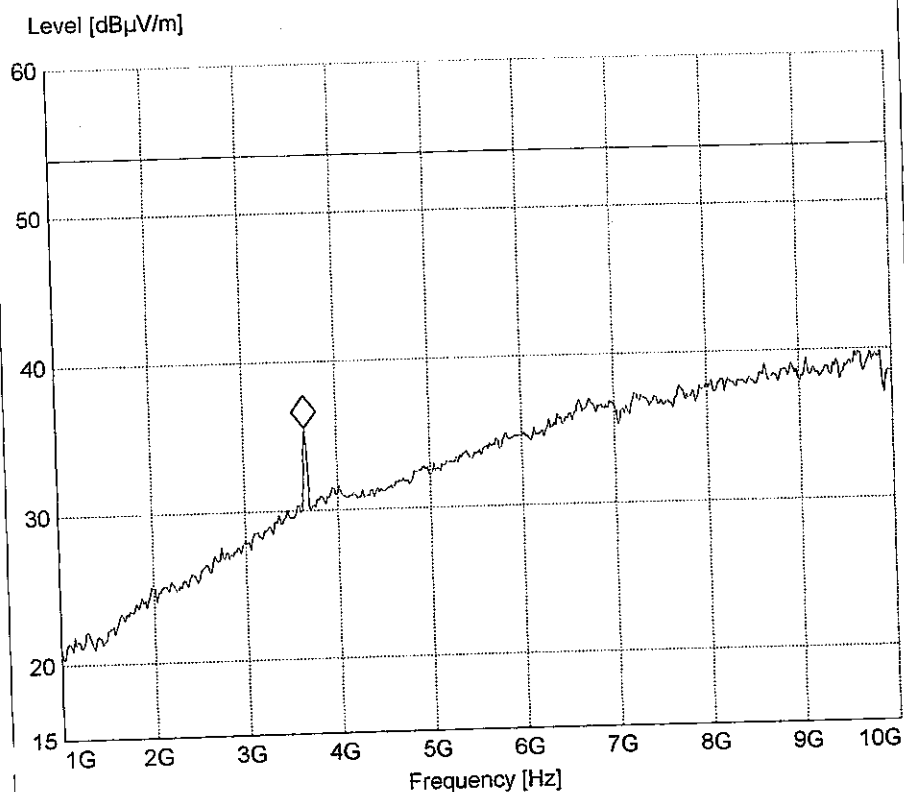

— MES HP1191 H Hor
— LIM FCC ClassB F QP/AV FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16002795 001

Test Report No.:

Seite 6 von 8

Page 6 of 8

Radiated Spurious

FCC ClassB

EUT:

Manufacturer:

Operating Condition: Channel2

Test Site: SMQ EMC Lab.SAC

Operator:

Test Specification: Vertical


Comment: AC 120V/60Hz

M/N: ~~HP1191~~ HP1291

12.04.04.

Marker: 3.651302605 GHz 39.73 dB μ V/m

Level [dB μ V/m]

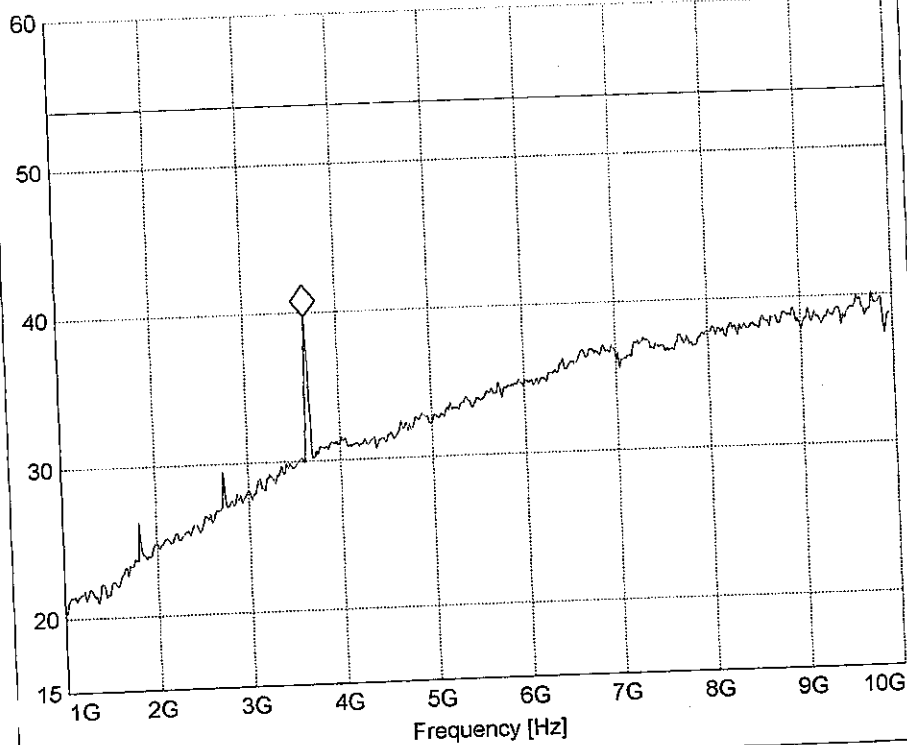


— MES HP1191 H Ver
— LIM FCC ClassB F QP/AV FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16002795 001

Test Report No.:

Seite 7 von 8

Page 7 of 8

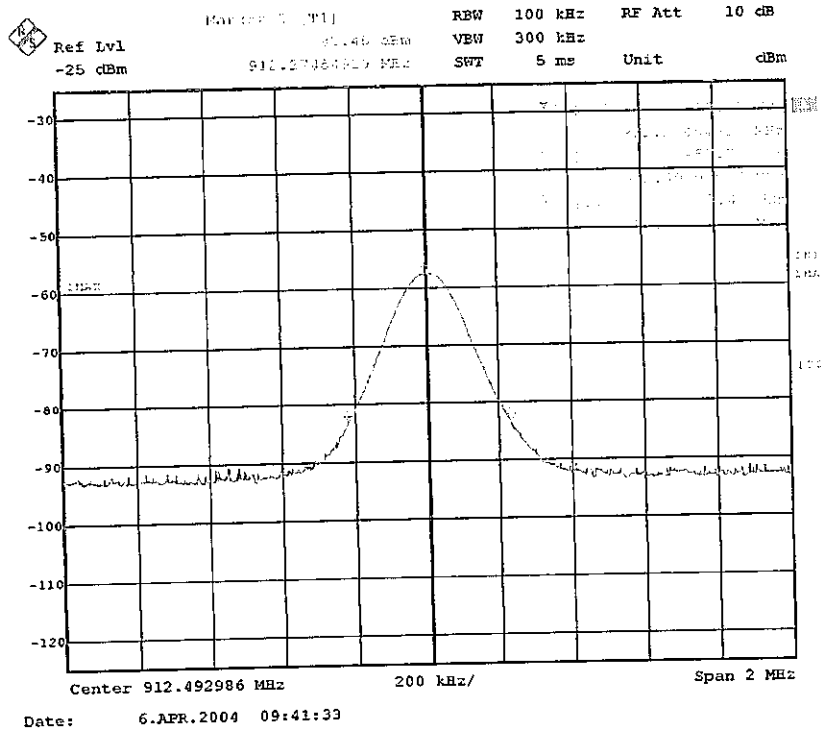

Prüfbericht - Nr.: 16002795 001

Test Report No.:

Seite 8 von 8

Page 8 of 8

