

Prüfbericht - Nr.: 14012024 002		Seite 1 von 10	
Test Report No.		Page 1 of 10	
Auftraggeber: Applicant		Classic Tech Development Ltd. 12/F., Yu Xiu Industrial Building, 87 Hung To Road, Kwun Tong, Kowloon Hong Kong	
Gegenstand der Prüfung: Test item		Transmitter of Magnetic Field Wireless Neckband Headphone	
Bezeichnung: Identification	MF201	Serien-Nr.: Serial No.	Engineering sample
Wareneingangs-Nr.: Receipt No.	060126052	Eingangsdatum: Date of receipt	26.01.2006
Prüfort: Testing location		TÜV Rheinland Hong Kong Ltd. Unit 8, 25 th Floor, Skyline Tower, 39 Wang Kwong Road, Kowloon Bay Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong	
Prüfgrundlage: Test specification		FCC Part 15, Subpart C	
Prüfergebnis: Test Result		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .	
geprüft / tested by:		kontrolliert / reviewed by:	
06.04.2006	Derek Leung Project Manager	06.04.2006	Thomas Berns Senior Project Manager
Datum Date	Name Name	Unterschrift Signature	Datum Date
Sonstiges: FCC ID:REDMF200-001T Other Aspects			
Abkürzungen:		Abbreviations:	
OK, Pass, P	= entspricht Prüfgrundlage	OK, Pass, P	= passed
Fail, F	= entspricht nicht Prüfgrundlage	Fail, F	= failed
N/A	= nicht anwendbar	N/A	= not applicable
N/T	= nicht getestet	N/T	= not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicate in extracts. This test report does not entitle to carry any safety mark on this or similar products.			

Test Summary

Radiated Emissions of Carrier Frequencies

Result: Pass

Spurious Radiated Emissions

Result: Pass

Contents

List of Test and Measurement Instruments.....	4
General Product Information	5
Product Function and Intended Use	5
Ratings and System Details:	5
Independent Operation Modes	6
Submitted Documents	6
Related Submittal(s) Grants.....	6
Test Set-up and Operation Mode.....	7
Principle of Configuration Selection	7
Test Operation and Test Software.....	7
Special Accessories and Auxiliary Equipment	7
Countermeasures to achieve EMC Compliance	7
Test Methodology	8
Radiated Emission	8
Test Results	9
Radiated Emission of Carrier Frequencies Section 15.205 & 15.209.....	9
Spurious Radiated Emissions Section 15.209	10
Appendix 1: Test Results	
Appendix 2: Test Setup	
Appendix 3: EUT External Photo	
Appendix 4: EUT Internal Photo	
Appendix 5: FCCID Label, Block Diagram, Schematics, User manual and Bill of Material	

List of Test and Measurement Instruments

Kind of Equipment	Manufacturer	Type	S/N
Test Receiver	Rohde & Schwarz	ESVS30	842807/009
Biconical Antenna	Rohde & Schwarz	HK116	841489/015
Log.-Periodic Antenna	Rohde & Schwarz	HL223	841516/017
Active Loop Antenna	EMCO	6502	9107-2651
Spectrum Analyzer	Rohde & Schwarz	FSP30	1093.4495K30

General Product Information

Product Function and Intended Use

The transmitter (Model: MF201) is a magnetic field wireless neckband headphone system operating at 2 channels (13.56 MHz & 14.65 MHz) with auto-switching. A stereo analog audio signal is input to the transmitter and converted by an on-board ADC, to a signal digital audio stream. The transmitter then encodes the audio stream and transmitting the audio signal to the associated wireless neckband headphone receiver (MF102).

Frequency switching mechanism: The default operating frequency of a paired devices is 14.65MHz, when another paired devices close the them (i.e. within 1-2 m range), the original pair of transmitter and receiver will be shifted to 13.56MHz by the transmitter change its frequency and it also commands the receiver to change the frequency. When the interferer move away or powered off, the original pair will switch the frequency back to 14.65MHz. The detection of the co-channel interference (14.65MHz) is done by the transmitter of which periodically scan the environment.

Ratings and System Details:

FCC ID: REDMF200-001T

Transmitter

Operating Frequencies :	13.56MHz and 14.65MHz
Number of channel :	One for each frequency
Type of antenna :	Integral antenna: TDK Ferrite core Q5F (R5X35mm), part No.33-05-ER5X35 : 1 pc
Power supply :	Battery operated 1.5 Volt (AAA Battery x 1)
Port :	none

Independent Operation Modes

The basic operation mode :

- transmits audio signal (i.e. music) to the associated wireless headset.

For further information refer to User Manual

Submitted Documents

The submitted documents are listed as follow:

- Circuit diagram
- Block diagram
- User manual
- FCC ID label

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The test was performed under normal operating mode to obtain the maximum emission.

Test Operation and Test Software

Test operation should refer to test methodology.

- There was no special software to exercise the device.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- none


Countermeasures to achieve EMC Compliance

-

Test Methodology

Radiated Emission

The radiated emission measurements were performed according to the procedures in ANSI C63.4-2003. The equipment under test (EUT) was placed at the middle of the 80 cm height turntable, and the turntable is 10 meters far from the measuring antenna. The EUT was tested in three orthogonal planes and the turntable was rotated 360° for obtaining the maximum emission. The antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement below 30MHz was performed by a loop antenna, maximum emission was obtained by varying the two antenna polarizations of the loop antenna faced and sided to the EUT.

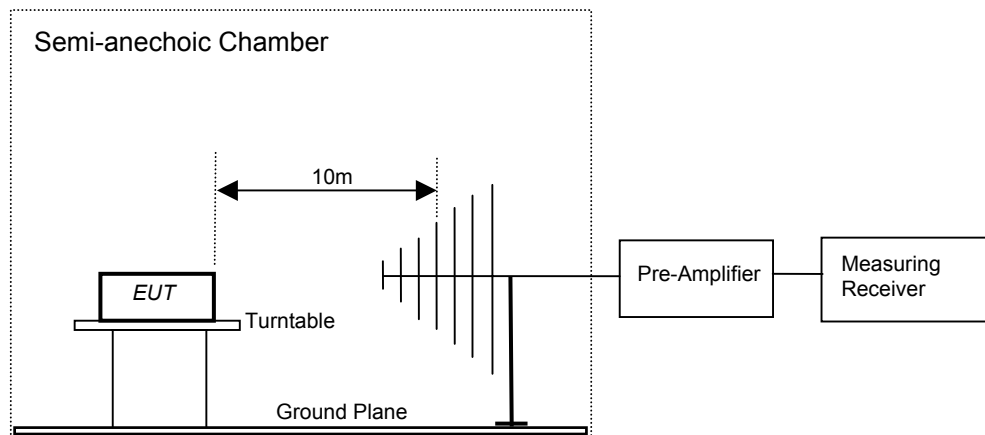

Test Results

Radiated Emission of Carrier Frequencies

Section 15.205 & 15.209

RESULT:

Pass

Test Specification : FCC Part 15 Section 15.205 & 15.209
 Test Method : ANSI C63.4-2003
 Measurement Location : Semi Anechoic Chamber
 Measurement Bandwidth : 10kHz
 Detector : Peak
 Supply Voltage : DC 1.5V
 Fundamental Frequencies : 13.56MHz & 14.65MHz

Fundamental Signal (MHz)	Antenna Polarization	Limit at 30m (dBμV/m)	Limit at 10m (dBμV/m)	Field Strength at 10m (dBμV/m)	Margin (dB)
13.56	Loop face to EUT	29.5	48.6	36.2	12.4
14.65	Loop face to EUT	29.5	48.6	38.9	9.7

Remarks:

Peak detection was used instead of QP detection for the measurements. Peak values should be higher or equal to QP values.

Conversion of limit at 30m to limit at 10m: $20 \log \left(\frac{30}{10} \right)^2 = 19.1dB$

Spurious Radiated Emissions**Section 15.209****RESULT:****Pass**

Test Specification : FCC Part 15 Section 15.209
 Test Method : ANSI C63.4-2003
 Measurement Location : Semi Anechoic Chamber
 Detector Function : QP
 Supply Voltage : DC 1.5V
 Measuring Frequency Range : 9kHz – 330MHz(Up to 10th harmonic of the internal crystal oscillator frequency-32.768MHz)
 Measuring Distance : 10m

Fundamenta l Carrier Signal (MHz)	Spurious Emission (MHz)	Antenna Polarization	Field Strength at 10m (dBμV/m)	Limit (dBμV/m)	Margin (dB)
13.56	68.292	Horizontal	21.3	29.55	8.25
	95.624	Horizontal	27.2	29.55	2.35
	189.124	Horizontal	20.9	33.07	12.17
	68.36	Vertical	23.5	29.55	6.05
	94.204	Vertical	27.6	33.07	5.47
14.65	44.284	Horizontal	15.5	29.55	14.05
	73.752	Horizontal	23.0	29.55	6.6
	103.26	Horizontal	21.3	33.07	11.77
	44.256	Vertical	24.4	29.55	5.15
	73.772	Vertical	26.2	29.55	3.35

Section 15.209

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), was also comply with the radiated emission limits specified in Section 15.209.

Limit for Radiated Emission under Section 15.209:

Frequency (MHz)	Field strength (μV/m) at 3m	Field strength (dBμV/m) at 3m	Field strength (dBμV/m) at 10m
30-88	100	40.00	29.55
88-216	150	43.52	33.07
216-960	200	46.00	35.50