



RADIO TEST REPORT


Test Report No. : 11201777H-A

Applicant : KEYENCE CORPORATION
Type of Equipment : Handheld Mobile Computer
Model No. : BT-W100GA
FCC ID : RF41395C
Test regulation : FCC Part 15 Subpart C: 2016
* WLAN part
Test Result : Complied


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

Date of test: April 11 to May 12, 2016

Representative test engineer:


Kazuya Yoshioka
Engineer
Consumer Technology Division

Approved by:


Takayuki Shimada
Engineer
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

REVISION HISTORY

Original Test Report No.: 11201777H-A

[illegible]

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of E.U.T. during testing.....	10
SECTION 5: Conducted Emission.....	12
SECTION 6: Radiated Spurious Emission	13
SECTION 7: Antenna Terminal Conducted Tests.....	15
APPENDIX 1: Test data	16
Conducted Emission	16
6dB Bandwidth	17
Maximum Peak Output Power	20
Radiated Spurious Emission	24
Conducted Spurious Emission	39
Power Density	40
99% Occupied Bandwidth	43
APPENDIX 2: Test instruments	45
APPENDIX 3: Photographs of test setup	47
Conducted Emission	47
Radiated Spurious Emission	48
Worst Case Position	49

SECTION 1: Customer information

Company Name	:	KEYENCE CORPORATION
Address	:	1-3-14, Higashinakajima Higashiyodogawa-ku Osaka 533-8555 Japan
Telephone Number	:	+81-6-6379-1111
Facsimile Number	:	+81-6-6325-6818
Contact Person	:	Tsuyoshi Aoyama

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Handheld Mobile Computer
Model No.	:	BT-W100GA
Serial No.	:	Refer to Section 4, Clause 4.2
Rating	:	DC 2.8 V – 4.2 V (Battery) DC 5.3 V (Cradle)
Receipt Date of Sample	:	April 11, 2016
Country of Mass-production	:	Japan
Condition of EUT	:	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product Description

Model: BT-W100GA (referred to as the EUT in this report) is a Handheld Mobile Computer.

General Specification

Clock frequency(ies) in the system	:	38.4 MHz (X'tal)
Operating Temperature	:	-20 deg. C - +50 deg. C

Radio Specification

Radio Type : Transceiver
Power Supply (inner) : DC 1.8 V / DC 3.3 V

	IEEE802.11b *1)	IEEE802.11g/n (20 M band) *1)	IEEE802.11a/n (20 M band)	IEEE802.11n (40 M band)
Frequency of operation	2412 MHz - 2462 MHz	2412 MHz - 2462 MHz	5180 MHz - 5240 MHz 5280 MHz - 5320 MHz 5500 MHz - 5580 MHz 5660 MHz - 5700 MHz 5745 MHz - 5825 MHz	5190 MHz - 5230 MHz 5310 MHz 5510 MHz - 5550 MHz 5670 MHz 5755 MHz - 5795 MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK)	
Channel spacing	5MHz		20MHz	40MHz
Antenna type	Multilayer Monopole Antenna			
Antenna Connector type	Soldering			
Antenna Gain	2.1 dBi (2.4 GHz)		2.4 dBi (5 GHz)	

	Bluetooth Ver.2.1 with EDR function
Frequency of operation	2402 MHz - 2480 MHz
Type of modulation	FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)
Channel spacing	1 MHz
Antenna type	Multilayer Monopole Antenna
Antenna Connector type	Soldering
Antenna Gain	2.1 dBi

*1) This test report applies to WLAN (2.4 GHz band) part.

*Wireless LAN and Bluetooth do not transmit simultaneously.

Variant model

This model has a variant model: BT-W155GA.

BT-W100GA is a Laser-type handy scanner. BT-W155GA is a Camera-type handy scanner.


The schematic differences between BT-W100GA and BT-W155GA are the following diagrams.

Circuit design related with WLAN/Bluetooth is same between 2 models.

These difference cause no influence to radio specification.

There was no degradation of EMC characteristic.

Therefore we can consider them electrically identical.

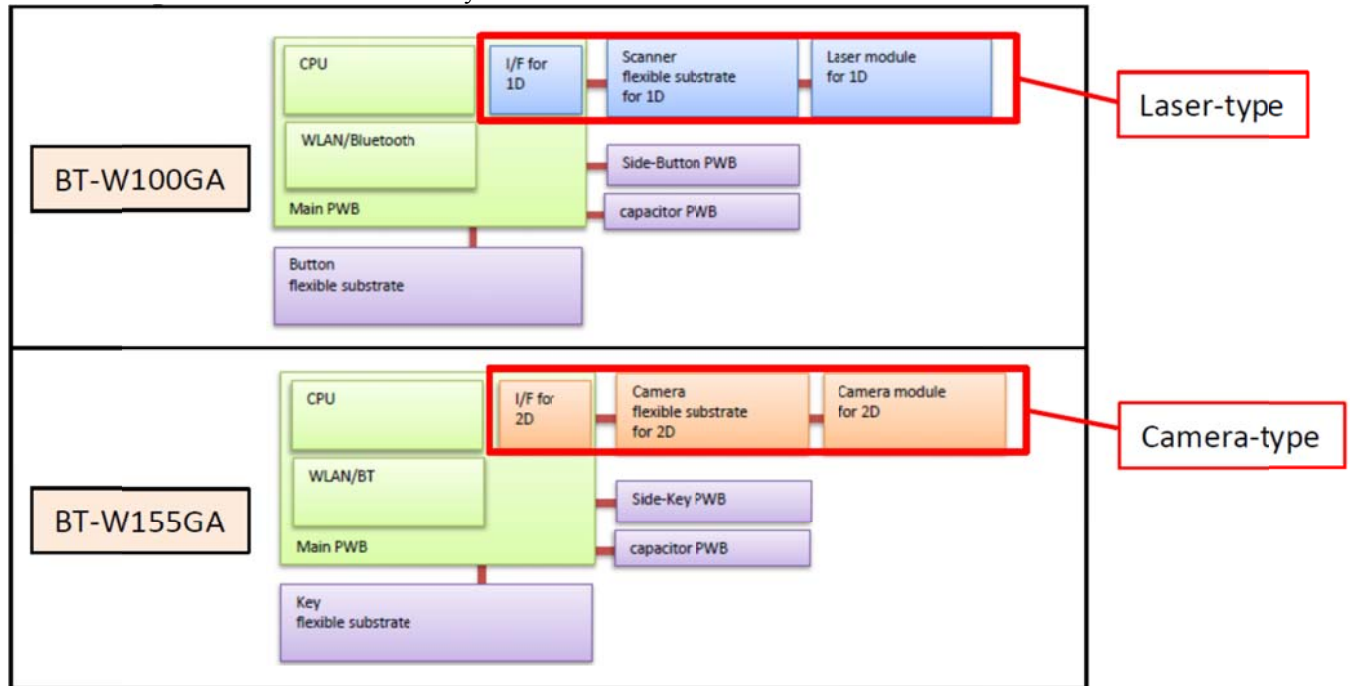

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC part 15 final revised on April 6, 2016.

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods IC: RSS-Gen 8.8	FCC: Section 15.207 IC: RSS-Gen 8.8	QP 20.4 dB, 0.66000 MHz, L AV 16.1 dB, 0.66000 MHz, N	Complied	-
6dB Bandwidth	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 IC: -	FCC: Section 15.247(a)(2) IC: RSS-247 5.2(1)	See data.	Complied	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 IC: RSS-Gen 6.12	FCC: Section 15.247(b)(3) IC: RSS-247 5.4(4)		Complied	Conducted
Power Density	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 IC: -	FCC: Section 15.247(e) IC: RSS-247 5.2(2)		Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 IC: RSS-Gen 6.13	FCC: Section 15.247(d) IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	1.1 dB 4874.000 MHz, AV, Horizontal	Complied	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *1)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 DTS Meas Guidance v03r05 12.2.7.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The test was performed with the New Battery (DC 4.2 V) and the EUT constantly provides the stable voltage to RF part through the regulator regardless of input voltage from New Battery. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 6.6	IC: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Antenna terminal test Uncertainty (+/-)							
Power meter		Conducted emission and Power density			Conducted emission		Channel power
Below 1 GHz	Above 1 GHz	Below 1 GHz	1 GHz - 3 GHz	3 GHz - 18 GHz	18 GHz - 26.5 GHz	26.5 GHz - 40 GHz	
0.9 dB	1.0 dB	1.4 dB	1.7 dB	2.8 dB	2.8 dB	2.9 dB	2.6 dB

Frequency range	Conducted emission using AMN(LISN) (+dB)
0.009 – 0.15MHz	3.5 dB
0.15 – 30MHz	2.9 dB

Polarity	Radiated emission (Below 1GHz)			
	(3 m*)(+dB)		(10 m*)(+dB)	
	30 – 200 MHz	200 – 1000MHz	30 – 200 MHz	200 – 1000MHz
Horizontal	4.9 dB	5.2 dB	4.9 dB	5.0 dB
Vertical	4.6 dB	5.9 dB	5.0 dB	5.0 dB

Radiated emission				
(3 m*)(+dB)		(1 m*)(+dB)	(0.5 m*)(+dB)	(10 m*)(+dB)
1 – 6GHz	6 – 18GHz	10 – 26.5 GHz	26.5 – 40GHz	1 -18 GHz
5.1 dB	5.3 dB	5.1 dB	5.1 dB	5.3 dB

*Measurement distance

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)


Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - ” of TCB Council Workshop October 2009.

Mode	Remarks*
IEEE 802.11b (11b)	2 Mbps, PN9
IEEE 802.11g (11g)	24 Mbps, PN9
IEEE 802.11n SISO 20 MHz BW (11n-20)	MCS 1, PN9
*Transmitting duty was 100 % on all tests. *The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel)	
*Power of the EUT was set by the software as follows; Power settings: 11b 12 dBm, 11g/n-20 13 dBm Software: calibrateG *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*The details of Operating mode(s)

Test Item	Operating Mode	Tested frequency
Conducted Emission, Radiated Spurious Emission (Below 1 GHz), Conducted Spurious Emission	11g Tx *1)	2462 MHz
Radiated Spurious Emission (Above 1 GHz)	11b Tx	2412 MHz
	11g Tx *2)	2437 MHz
		2462 MHz
	11n-20 Tx *3)	2412 MHz 2462 MHz
6dB Bandwidth, Maximum Peak Output Power, Power Density, 99% Occupied Bandwidth	11b Tx 11g Tx 11n-20 Tx	2412 MHz 2437 MHz 2462 MHz
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test. *2) Since 11g and 11n-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power *3) Only band edge test was tested on this mode, because the 11g Tx mode had the higher power at antenna terminal test.		

4.2 Configuration and peripherals

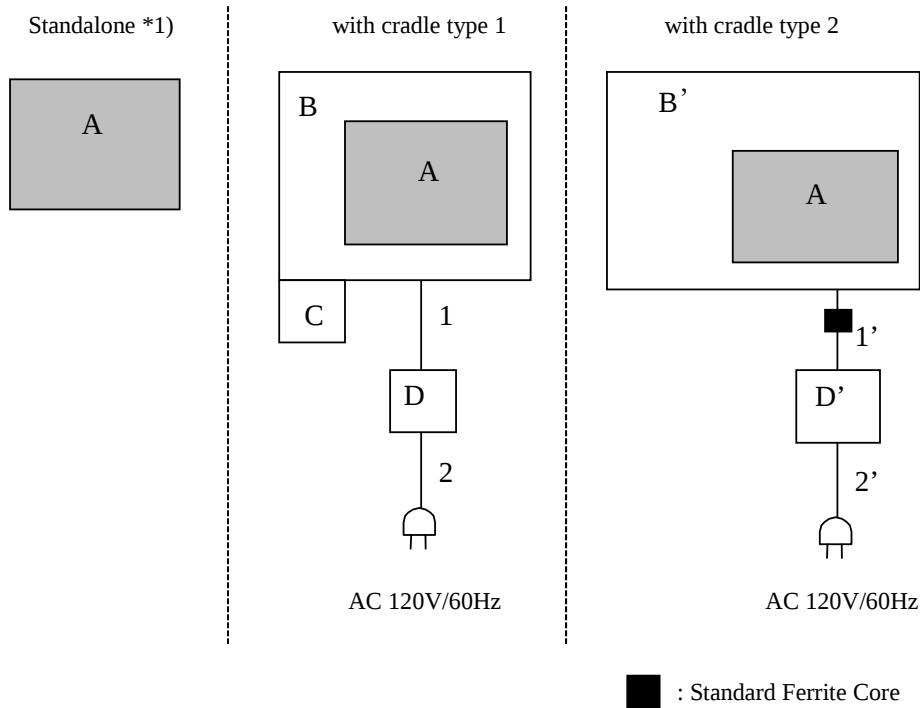

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Handheld Mobile Computer	BT-W100GA	#2A610011 *1) #2A610012 *2)	KEYENCE CORPORATION	EUT
B	Cradle	BT-WUC1U	#2A610250	KEYENCE CORPORATION	*3)
B'	Cradle	BT-WUC14	-	KEYENCE CORPORATION	-
C	USB Memory	OP-87502	-	KEYENCE CORPORATION	-
D	AC Adaptor	OP-88020	-	KEYENCE CORPORATION	-
D'	AC Adaptor	SEE60N2-16-0	ES057	Sanken Electric Co., Ltd.	-

*1) Used for Antenna terminal conducted tests

*2) Used for all tests except for Antenna terminal conducted tests

*3) Used for Conducted emission test as a representative

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	1.8	Unshielded	Unshielded	-
1'	DC Cable	1.3	Unshielded	Unshielded	-
2	AC Cable	2.0	Unshielded	Unshielded	-
2'	AC Cable	2.0	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector	: QP and CISPR AV
Measurement range	: 0.15 MHz – 30 MHz
Test data	: APPENDIX
Test result	: Pass

SECTION 6: Radiated Spurious Emission

Test Procedure

It was measured based on "11.0 Emissions in non-restricted frequency bands" of "558074 D01 DTS Meas Guidance v03r05".

[For below 1GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *3)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	Average Power Method: <u>12.2.5.1</u> RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces	RBW: 100 kHz VBW: 300kHz
Test Distance	3m	4.5 m *1) (1 GHz - 10GHz), 1 m *2) (10 GHz - 26.5 GHz)		4.5 m *1) (1 GHz - 10GHz), 1 m *2) (10 GHz - 26.5 GHz)

*1) Distance Factor: $20 \times \log(4.5 \text{ m} / 3.0 \text{ m}) = 3.5 \text{ dB}$

*2) Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

*3) Average Power Measurement was performed based on 6.0 & 12.2.5 of "KDB 558074 D01 DTS Meas Guidance v03r05"

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT, EUT on the cradle Type1 and Type2 to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range	: 30 M - 40 GHz
Test data	: APPENDIX
Test result	: Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	20 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4)	9kHz to 150kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1 kHz	27 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 10.2 Method PKPSD (peak PSD) of "KDB 558074 D01 DTS Meas Guidance v03r05".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.
(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data	: APPENDIX
Test result	: Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 1: Test data

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Ise EMC Lab. No.1 Semi Anechoic Chamber
Date : 04/15/2016

Report No. : 11201777H

Temp./Humi. : 23deg. C / 43% RH
Engineer : Hiroyuki Furutaka

Mode / Remarks : WLAN 11g 24Mbps 2462MHz

LIMIT : FCC15.207 QP
FCC15.207 AV

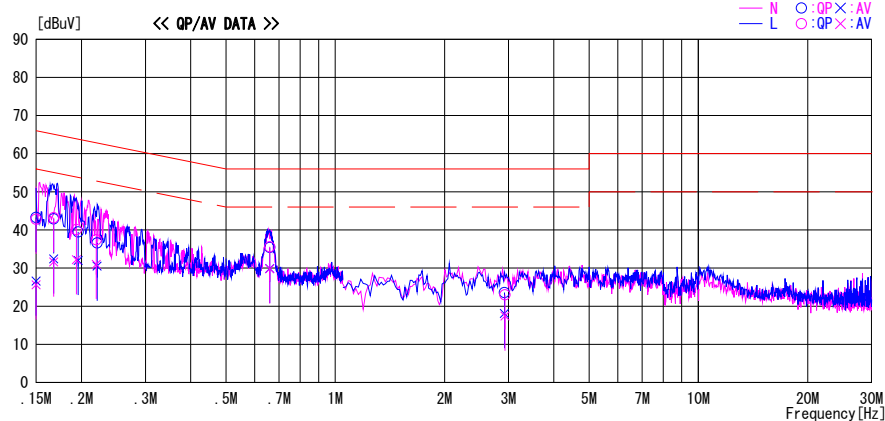

Frequency	Reading Level		Corr. Factor	Results		Limit		Margin		Phase	Comment
	QP	AV		QP	AV	QP	AV	QP	AV		
[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dB]	[dB]		
0.15000	30.1	13.4	13.2	43.3	26.6	66.0	56.0	22.7	29.4	N	
0.15000	29.6	12.4	13.2	42.8	25.6	66.0	56.0	23.2	30.4	L	
0.16764	30.0	18.4	13.2	43.2	31.6	65.1	55.1	21.9	23.5	L	
0.16765	29.7	19.2	13.2	42.9	32.4	65.1	55.1	22.2	22.7	N	
0.19370	26.9	19.0	13.2	40.1	32.2	63.9	53.9	23.8	21.7	L	
0.19585	26.3	18.8	13.2	39.5	32.0	63.8	53.8	24.3	21.8	N	
0.21967	24.1	17.7	13.3	37.4	31.0	62.8	52.8	25.4	21.8	L	
0.22086	23.3	17.2	13.3	36.6	30.5	62.8	52.8	26.2	22.3	N	
0.66000	22.0	16.5	13.4	35.4	29.9	56.0	46.0	20.6	16.1	N	
0.66000	22.2	16.4	13.4	35.6	29.8	56.0	46.0	20.4	16.2	L	
2.92323	9.8	4.3	13.8	23.6	18.1	56.0	46.0	32.4	27.9	N	
2.93420	9.2	3.6	13.8	23.0	17.4	56.0	46.0	33.0	28.6	L	


CHART : WITH FACTOR. Peak hold data. CALCULATION : RESULT = READING + C.F (LISN + ATTEN + CABLE)
Except for the above table : adequate margin data below the limits.

6dB Bandwidth

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11201777H
Date	April 14, 2016
Temperature / Humidity	26 deg. C / 51 % RH
Engineer	Masafumi Niwa
Mode	Tx

Mode	Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
11b	2412	9.907	> 500
	2437	9.895	> 500
	2462	9.916	> 500
11g	2412	16.574	> 500
	2437	16.562	> 500
	2462	16.572	> 500
11n-20	2412	17.821	> 500
	2437	17.821	> 500
	2462	17.814	> 500


6dB Bandwidth

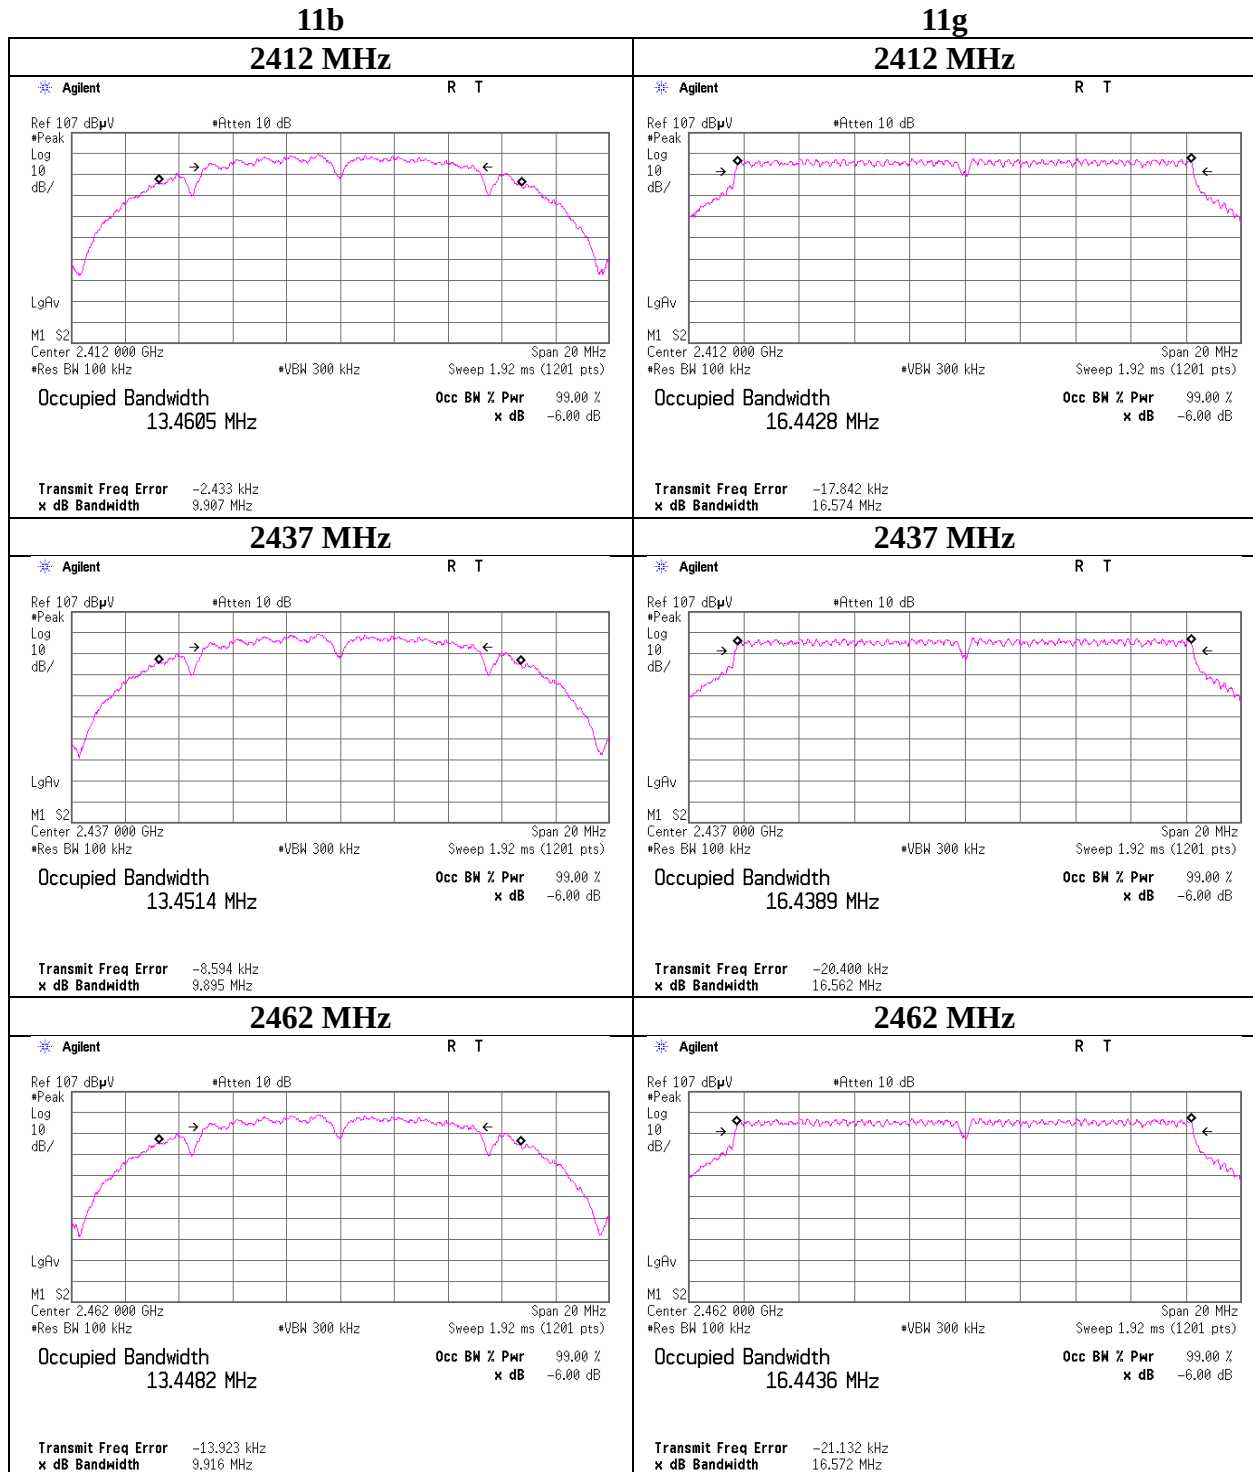


6dB Bandwidth

11n-20


2412 MHz

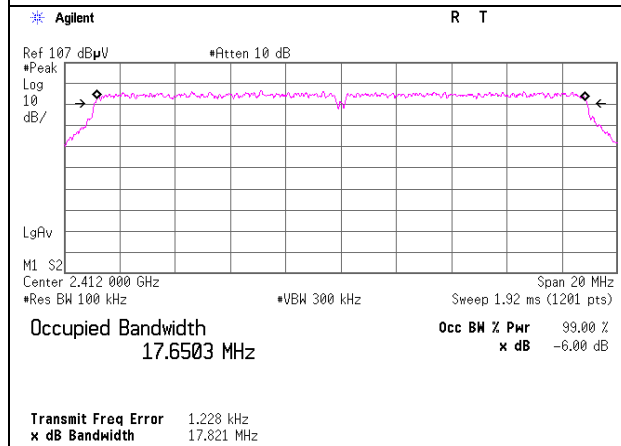

2437 MHz

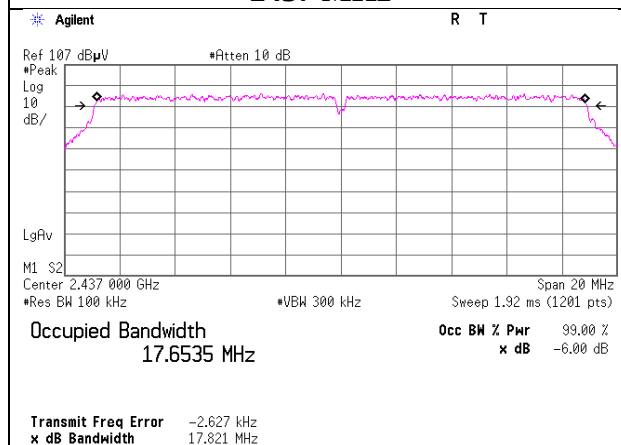

2462 MHz

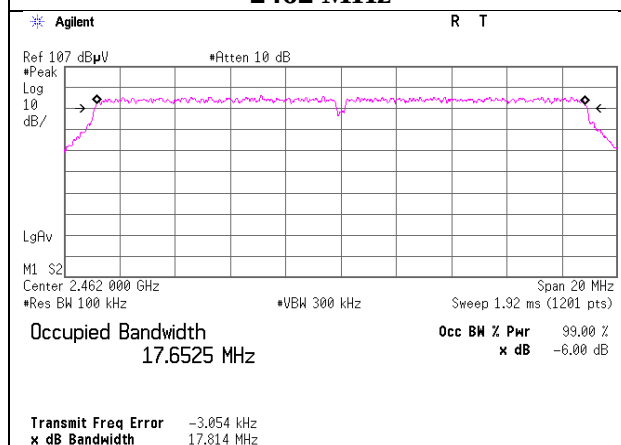

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Peak Output Power

Test place : Ise EMC Lab. No.6 Measurement Room
Report No. : 11201777H
Date : April 12, 2016
Temperature / Humidity : 24 deg. C / 31 % RH
Engineer : Masafumi Niwa
Mode : Tx 11b

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	1.91	1.89	10.03	13.83	24.15	30.00	1000	16.17
2437	2.01	1.91	10.03	13.95	24.83	30.00	1000	16.05
2462	1.84	1.91	10.03	13.78	23.88	30.00	1000	16.22

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

2437MHz

Rate	Reading	Remark
[Mbps]	[dBm]	
1	1.82	
2	1.88	*
5.5	1.26	
11	1.87	

*: Worst Rate

All comparison were carried out on same frequency and measurement factors.

Maximum Peak Output Power

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11201777H
Date	April 12, 2016
Temperature / Humidity	24 deg. C / 31 % RH
Engineer	Masafumi Niwa
Mode	Tx 11g

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	9.78	1.89	10.03	21.70	147.91	30.00	1000	8.30
2437	9.75	1.91	10.03	21.69	147.57	30.00	1000	8.31
2462	9.98	1.91	10.03	21.92	155.60	30.00	1000	8.08

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

2437 MHz

Rate [Mbps]	Reading [dBm]	Remark
6	9.01	
9	8.77	
12	9.08	
18	9.04	
24	9.79	*
36	9.35	
48	9.14	
54	9.41	

*: Worst Rate

All comparison were carried out on same frequency and measurement factors.

Maximum Peak Output Power

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11201777H
Date	April 12, 2016
Temperature / Humidity	24 deg. C / 31 % RH
Engineer	Masafumi Niwa
Mode	Tx 11n-20

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	8.65	1.89	10.03	20.57	114.02	30.00	1000	9.43
2437	8.47	1.91	10.03	20.41	109.90	30.00	1000	9.59
2462	8.54	1.91	10.03	20.48	111.69	30.00	1000	9.52

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

2437 MHz



MCS Number	Reading [dBm]	Remark
0	8.52	
1	8.53	*
2	8.45	
3	8.44	
4	8.46	
5	8.42	
6	8.52	
7	8.46	

* Worst MCS

All comparison were carried out on same frequency and measurement factors.

Burst rate confirmation

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11201777H
Date	April 14, 2016
Temperature / Humidity	26 deg. C / 51 % RH
Engineer	Masafumi Niwa
Mode	Tx

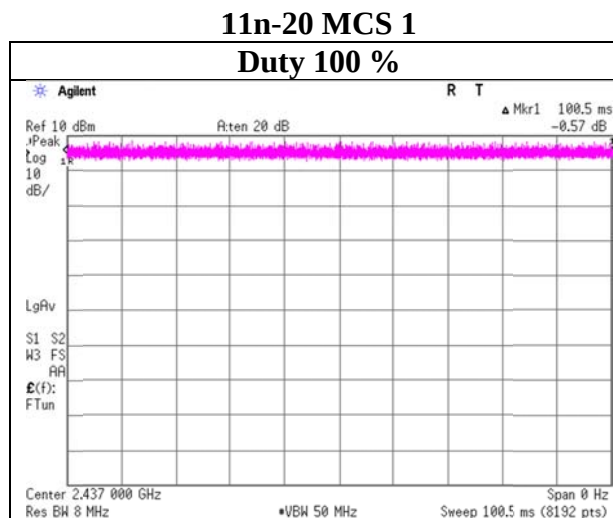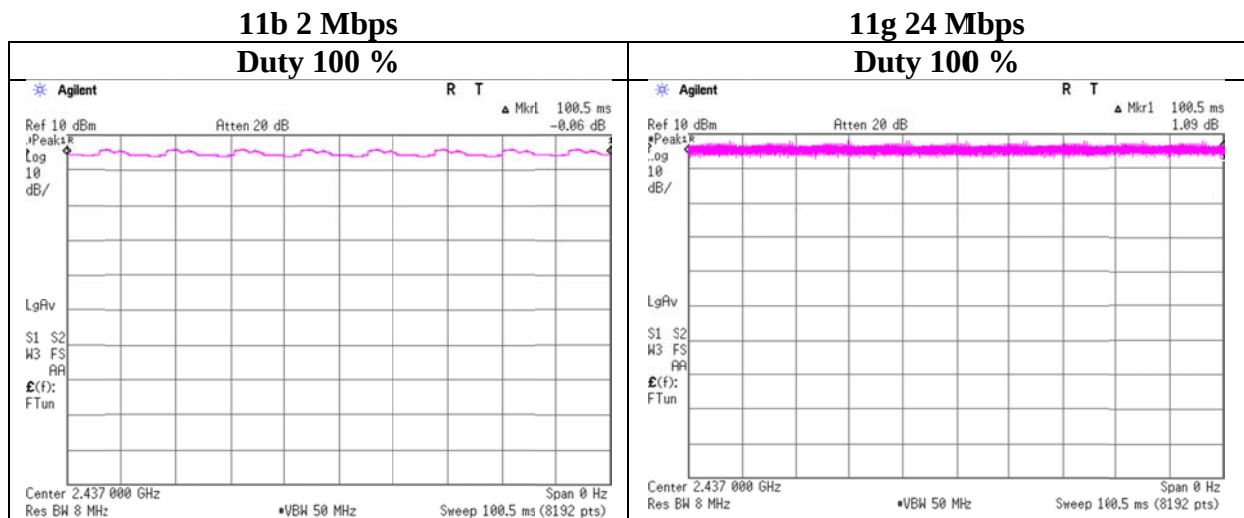

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber		
Report No.	11201777H		
Date	April 11, 2016	April 20, 2016	April 25, 2016
Temperature / Humidity	23 deg. C / 35 % RH	20deg. C / 33 % RH	25deg. C / 43 % RH
Engineer	Kazuya Yoshioka (1 GHz - 10 GHz)	Tomoki Matsui (10 GHz - 18 GHz)	Takafumi Noguchi (18 GHz - 26.5 GHz)
Mode	Tx 11b 2412 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2390.000	PK	41.5	27.9	6.8	32.1	44.1	73.9	29.8	
Hori	4824.000	PK	44.8	32.9	9.2	31.3	55.6	73.9	18.3	
Hori	7236.000	PK	40.4	36.8	10.4	32.6	55.0	73.9	18.9	Floor noise
Hori	9648.000	PK	41.0	38.1	9.7	32.6	56.2	73.9	17.7	Floor noise
Hori	2390.000	AV	33.9	27.9	6.8	32.1	36.5	53.9	17.4	
Hori	4824.000	AV	38.6	32.9	9.2	31.3	49.4	53.9	4.5	
Hori	7236.000	AV	30.2	36.8	10.4	32.6	44.8	53.9	9.1	Floor noise
Hori	9648.000	AV	31.0	38.1	9.7	32.6	46.2	53.9	7.7	Floor noise
Vert	2390.000	PK	41.0	27.9	6.8	32.1	43.6	73.9	30.3	
Vert	4824.000	PK	43.7	32.9	9.2	31.3	54.5	73.9	19.4	
Vert	7236.000	PK	40.6	36.8	10.4	32.6	55.2	73.9	18.7	Floor noise
Vert	9648.000	PK	41.3	38.1	9.7	32.6	56.5	73.9	17.4	Floor noise
Vert	2390.000	AV	31.3	27.9	6.8	32.1	33.9	53.9	20.0	
Vert	4824.000	AV	39.0	32.9	9.2	31.3	49.8	53.9	4.1	
Vert	7236.000	AV	30.2	36.8	10.4	32.6	44.8	53.9	9.1	Floor noise
Vert	9648.000	AV	31.0	38.1	9.7	32.6	46.2	53.9	7.7	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.5m / 3.0 m) = 3.53 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	87.0	26.9	6.7	32.7	87.9	-	-	Carrier
Hori	2400.000	PK	46.1	26.9	6.7	32.7	47.0	67.9	20.9	
Vert	2412.000	PK	84.2	26.9	6.7	32.7	85.1	-	-	Carrier
Vert	2400.000	PK	47.6	26.9	6.7	32.7	48.5	65.1	16.6	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201777H
Date	April 11, 2016
Temperature / Humidity	23 deg. C / 35 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11b 2412 MHz

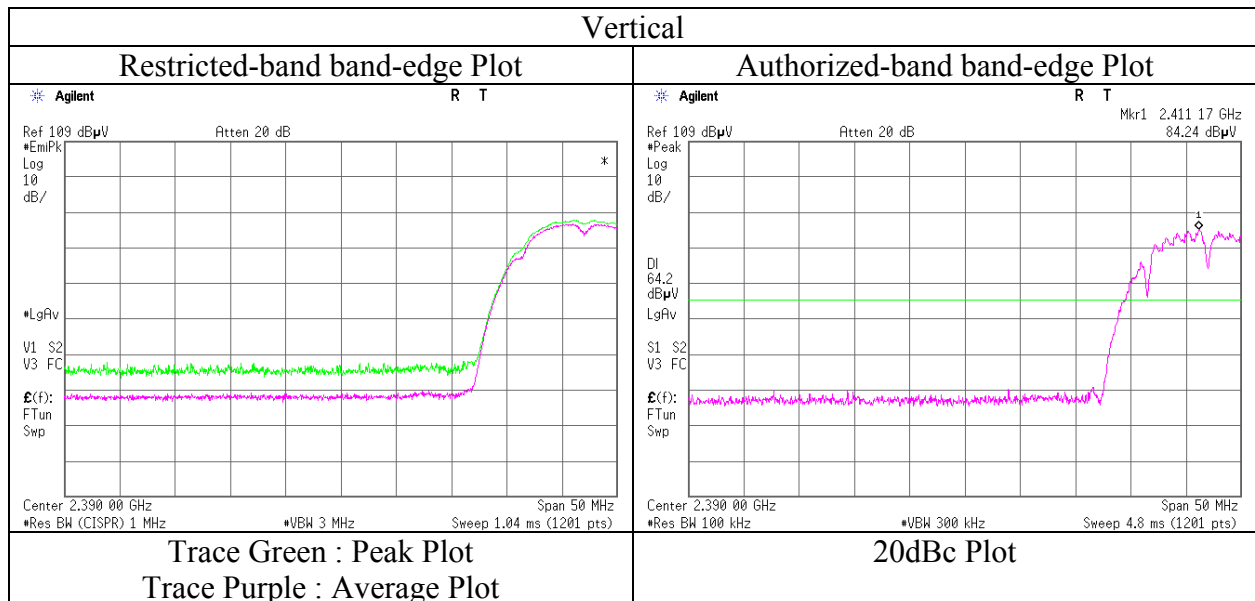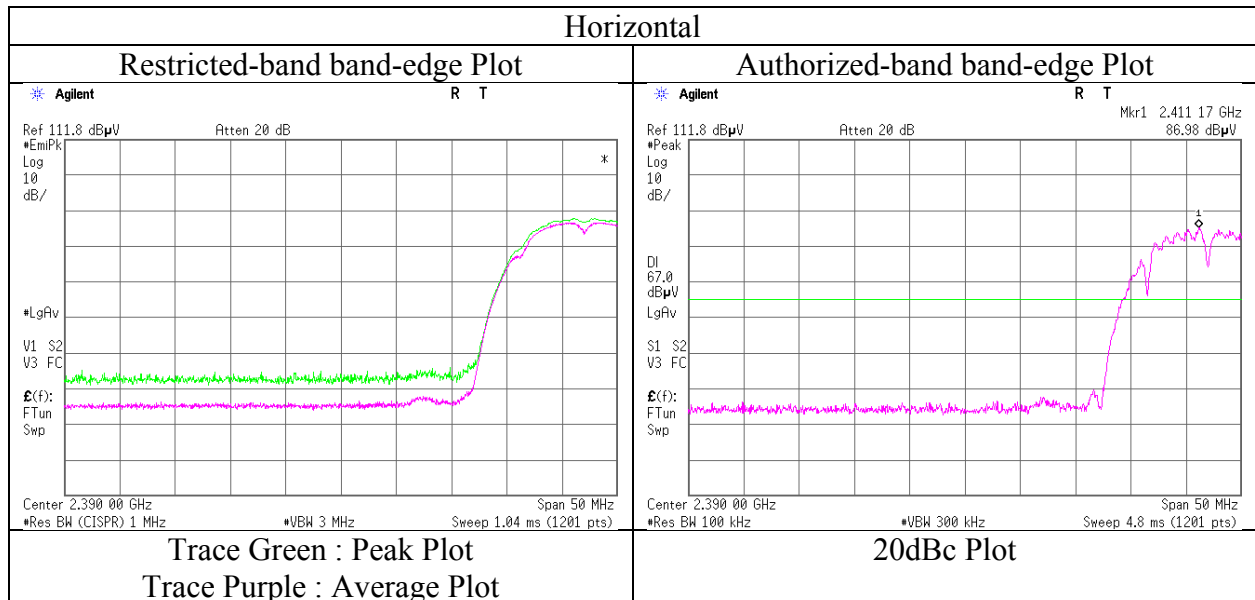

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No. : 11201777H
Date : April 11, 2016 April 20, 2016 April 25, 2016
Temperature / Humidity : 23 deg. C / 35 % RH 20deg. C / 33 % RH 25deg. C / 43 % RH
Engineer : Kazuya Yoshioka Tomoki Matsui Takafumi Noguchi
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz)
Mode : Tx 11b 2437 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	4874.000	PK	46.3	33.1	9.2	31.3	57.3	73.9	16.6	
Hori	7311.000	PK	39.4	36.8	10.4	32.6	54.0	73.9	19.9	Floor noise
Hori	9748.000	PK	40.6	38.2	9.7	32.7	55.8	73.9	18.1	Floor noise
Hori	4874.000	AV	41.8	33.1	9.2	31.3	52.8	53.9	1.1	
Hori	7311.000	AV	31.9	36.8	10.4	32.6	46.5	53.9	7.4	Floor noise
Hori	9748.000	AV	32.6	38.2	9.7	32.7	47.8	53.9	6.1	Floor noise
Vert	4874.000	PK	45.6	33.1	9.2	31.3	56.6	73.9	17.3	
Vert	7311.000	PK	39.8	36.8	10.4	32.6	54.4	73.9	19.5	Floor noise
Vert	9748.000	PK	40.8	38.2	9.7	32.7	56.0	73.9	17.9	Floor noise
Vert	4874.000	AV	41.4	33.1	9.2	31.3	52.4	53.9	1.5	
Vert	7311.000	AV	31.9	36.8	10.4	32.6	46.5	53.9	7.4	Floor noise
Vert	9748.000	AV	32.6	38.2	9.7	32.7	47.8	53.9	6.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.5\text{m} / 3.0\text{m}) = 3.53\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{m} / 3.0\text{m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber		
Report No.	11201777H		
Date	April 12, 2016	April 20, 2016	April 25, 2016
Temperature / Humidity	20 deg. C / 40 % RH	20deg. C / 33 % RH	25deg. C / 43 % RH
Engineer	Shinichi Miyazono (1 GHz - 10 GHz)	Tomoki Matsui (10 GHz - 18 GHz)	Takafumi Noguchi (18 GHz - 26.5 GHz)
Mode	Tx 11b 2462 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2483.500	PK	43.1	28.1	6.9	32.1	46.0	73.9	27.9	
Hori	4924.000	PK	47.2	33.3	9.3	31.3	58.5	73.9	15.4	
Hori	7386.000	PK	42.3	36.8	10.4	32.6	56.9	73.9	17.0	Floor Noise
Hori	9848.000	PK	43.3	38.2	11.2	32.7	60.0	73.9	13.9	Floor Noise
Hori	2483.500	AV	35.1	28.1	6.9	32.1	38.0	53.9	15.9	
Hori	4924.000	AV	39.5	33.3	9.3	31.3	50.8	53.9	3.1	
Hori	7386.000	AV	30.4	36.8	10.4	32.6	45.0	53.9	8.9	Floor Noise
Hori	9848.000	AV	31.2	38.2	11.2	32.7	47.9	53.9	6.0	Floor Noise
Vert	2483.500	PK	43.6	28.1	6.9	32.1	46.5	73.9	27.4	
Vert	4924.000	PK	46.5	33.3	9.3	31.3	57.8	73.9	16.1	
Vert	7386.000	PK	42.3	36.8	10.4	32.6	56.9	73.9	17.0	Floor Noise
Vert	9848.000	PK	43.2	38.2	11.2	32.7	59.9	73.9	14.0	Floor Noise
Vert	2483.500	AV	35.6	28.1	6.9	32.1	38.5	53.9	15.4	
Vert	4924.000	AV	39.4	33.3	9.3	31.3	50.7	53.9	3.2	
Vert	7386.000	AV	30.6	36.8	10.4	32.6	45.2	53.9	8.7	Floor Noise
Vert	9848.000	AV	31.5	38.2	11.2	32.7	48.2	53.9	5.7	Floor Noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.5 m / 3.0 m) = 3.5 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201777H
Date	April 12, 2016
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Shinichi Miyazono
Mode	Tx 11b 2462 MHz

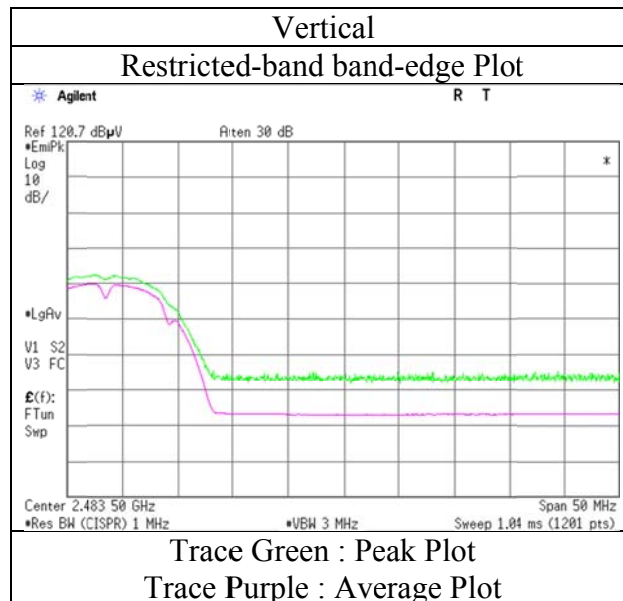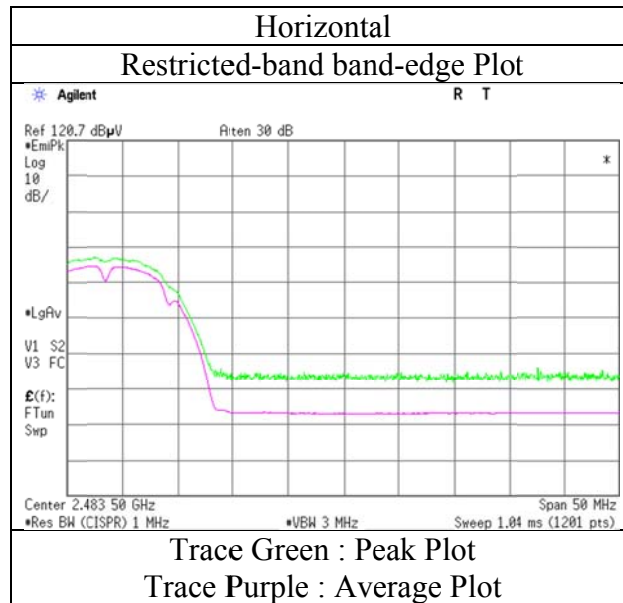

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No. : 11201777H
Date : April 12, 2016 April 20, 2016 April 25, 2016
Temperature / Humidity : 20 deg. C / 40 % RH 20deg. C / 33 % RH 25deg. C / 43 % RH
Engineer : Kazuya Yoshioka Tomoki Matsui Takafumi Noguchi
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz)
Mode : Tx 11g 2412 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2390.000	PK	46.0	27.9	6.8	32.1	48.6	73.9	25.3	
Hori	4824.000	PK	42.2	32.9	9.2	31.3	53.0	73.9	20.9	
Hori	7236.000	PK	40.4	36.8	10.4	32.6	55.0	73.9	18.9	Floor noise
Hori	9648.000	PK	40.6	38.1	9.7	32.6	55.8	73.9	18.1	Floor noise
Hori	2390.000	AV	33.9	27.9	6.8	32.1	36.5	53.9	17.4	
Hori	4824.000	AV	29.5	32.9	9.2	31.3	40.3	53.9	13.6	
Hori	7236.000	AV	29.8	36.8	10.4	32.6	44.4	53.9	9.5	Floor noise
Hori	9648.000	AV	30.4	38.1	9.7	32.6	45.6	53.9	8.3	Floor noise
Vert	2390.000	PK	45.2	27.9	6.8	32.1	47.8	73.9	26.1	
Vert	4824.000	PK	39.4	32.9	9.2	31.3	50.2	73.9	23.7	
Vert	7236.000	PK	40.8	36.8	10.4	32.6	55.4	73.9	18.5	Floor noise
Vert	9648.000	PK	40.9	38.1	9.7	32.6	56.1	73.9	17.8	Floor noise
Vert	2390.000	AV	35.6	27.9	6.8	32.1	38.2	53.9	15.7	
Vert	4824.000	AV	32.8	32.9	9.2	31.3	43.6	53.9	10.3	
Vert	7236.000	AV	29.8	36.8	10.4	32.6	44.4	53.9	9.5	Floor noise
Vert	9648.000	AV	30.4	38.1	9.7	32.6	45.6	53.9	8.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.5m / 3.0 m) = 3.53 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB



20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	86.0	28.0	6.8	32.1	88.7	-	-	Carrier
Hori	2400.000	PK	45.3	28.0	6.8	32.1	48.0	68.7	20.7	
Vert	2412.000	PK	83.6	28.0	6.8	32.1	86.3	-	-	Carrier
Vert	2400.000	PK	44.1	28.0	6.8	32.1	46.8	66.3	19.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201777H
Date	April 12, 2016
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11g 2412 MHz

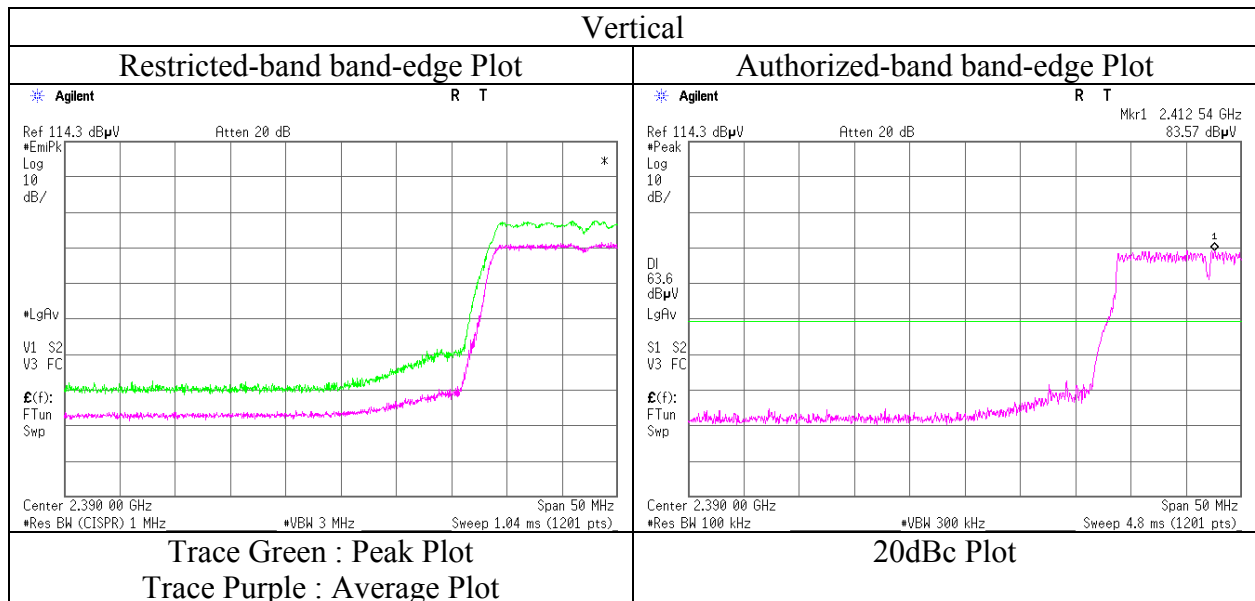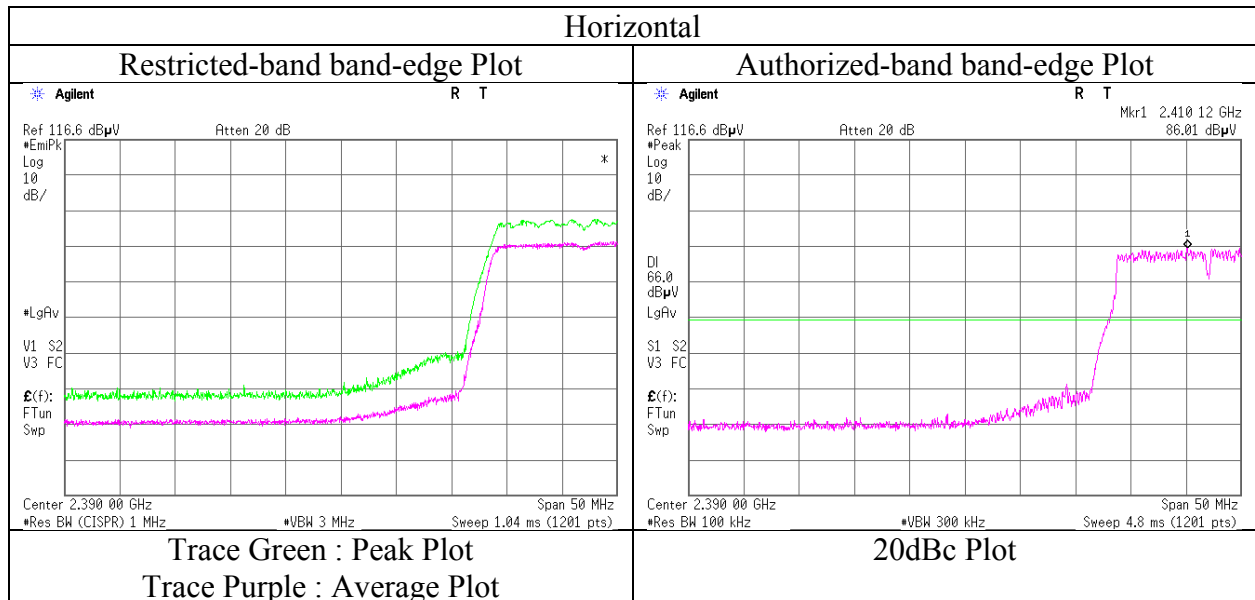

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No. : 11201777H
Date : April 12, 2016 April 20, 2016 April 25, 2016
Temperature / Humidity : 20 deg. C / 40 % RH 20deg. C / 33 % RH 25deg. C / 43 % RH
Engineer : Kazuya Yoshioka Tomoki Matsui Takafumi Noguchi
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz)
Mode : Tx 11g 2437 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	4874.000	PK	42.8	33.1	9.2	31.3	53.8	73.9	20.1	
Hori	7311.000	PK	39.7	36.8	10.4	32.6	54.3	73.9	19.6	Floor noise
Hori	9748.000	PK	41.2	38.2	9.7	32.7	56.4	73.9	17.5	Floor noise
Hori	4874.000	AV	35.3	33.1	9.2	31.3	46.3	53.9	7.6	
Hori	7311.000	AV	32.1	36.8	10.4	32.6	46.7	53.9	7.2	Floor noise
Hori	9748.000	AV	32.6	38.2	9.7	32.7	47.8	53.9	6.1	Floor noise
Vert	4874.000	PK	42.5	33.1	9.2	31.3	53.5	73.9	20.4	
Vert	7311.000	PK	39.9	36.8	10.4	32.6	54.5	73.9	19.4	Floor noise
Vert	9748.000	PK	41.5	38.2	9.7	32.7	56.7	73.9	17.2	Floor noise
Vert	4874.000	AV	35.3	33.1	9.2	31.3	46.3	53.9	7.6	
Vert	7311.000	AV	32.1	36.8	10.4	32.6	46.7	53.9	7.2	Floor noise
Vert	9748.000	AV	32.6	38.2	9.7	32.7	47.8	53.9	6.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.5\text{m} / 3.0\text{m}) = 3.53\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{m} / 3.0\text{m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No. : 11201777H
Date : April 12, 2016 April 20, 2016 April 22, 2016 April 25, 2016
Temperature / Humidity : 20 deg. C / 40 % RH 20deg. C / 33 % RH 22deg. C / 51 % RH 25deg. C / 43 % RH
Engineer : Kazuya Yoshioka Tomoki Matsui Kazuya Yoshioka Takafumi Noguchi
: (1 GHz - 10 GHz) (10 GHz - 18 GHz) (Below 1 GHz) (18 GHz - 26.5 GHz)
Mode : Tx 11g 2462 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	76.559	QP	36.9	6.4	7.8	32.1	19.0	40.0	21.0	
Hori	85.491	QP	39.9	7.6	7.9	32.1	23.3	40.0	16.7	
Hori	142.490	QP	35.2	14.6	8.6	32.0	26.4	43.5	17.1	
Hori	161.499	QP	37.5	15.4	8.8	32.0	29.7	43.5	13.8	
Hori	180.511	QP	35.8	16.1	8.9	32.0	28.8	43.5	14.7	
Hori	277.400	QP	34.3	13.0	9.7	31.8	25.2	46.0	20.8	
Hori	2483.500	PK	46.7	28.1	6.9	32.1	49.6	73.9	24.3	
Hori	4924.000	PK	43.7	33.3	9.3	31.3	55.0	73.9	18.9	
Hori	7386.000	PK	40.4	36.8	10.4	32.6	55.0	73.9	18.9	Floor noise
Hori	9848.000	PK	40.3	38.2	11.2	32.7	57.0	73.9	16.9	Floor noise
Hori	2483.500	AV	35.0	28.1	6.9	32.1	37.9	53.9	16.0	
Hori	4924.000	AV	33.0	33.3	9.3	31.3	44.3	53.9	9.6	
Hori	7386.000	AV	30.2	36.8	10.4	32.6	44.8	53.9	9.1	Floor noise
Hori	9848.000	AV	30.2	38.2	11.2	32.7	46.9	53.9	7.0	Floor noise
Vert	77.517	QP	48.6	6.5	7.8	32.1	30.8	40.0	9.2	
Vert	85.503	QP	51.1	7.6	7.9	32.1	34.5	40.0	5.5	
Vert	142.506	QP	41.3	14.6	8.6	32.0	32.5	43.5	11.0	
Vert	161.500	QP	42.1	15.4	8.8	32.0	34.3	43.5	9.2	
Vert	180.475	QP	40.1	16.1	8.9	32.0	33.1	43.5	10.4	
Vert	265.820	QP	38.6	12.7	9.6	31.9	29.0	46.0	17.0	
Vert	2483.500	PK	45.8	28.1	6.9	32.1	48.7	73.9	25.2	
Vert	4924.000	PK	42.4	33.3	9.3	31.3	53.7	73.9	20.2	
Vert	7386.000	PK	40.7	36.8	10.4	32.6	55.3	73.9	18.6	Floor noise
Vert	9848.000	PK	40.4	38.2	11.2	32.7	57.1	73.9	16.8	Floor noise
Vert	2483.500	AV	35.6	28.1	6.9	32.1	38.5	53.9	15.4	
Vert	4924.000	AV	32.5	33.3	9.3	31.3	43.8	53.9	10.1	
Vert	7386.000	AV	30.2	36.8	10.4	32.6	44.8	53.9	9.1	Floor noise
Vert	9848.000	AV	30.2	38.2	11.2	32.7	46.9	53.9	7.0	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.5\text{m} / 3.0\text{m}) = 3.53\text{ dB}$
 10 GHz - 26.5 GHz $20\log(1.0\text{m} / 3.0\text{m}) = -9.5\text{ dB}$

Radiated Spurious Emission (Reference Plot for band-edge)


Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201777H
Date	April 12, 2016
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11g 2462 MHz

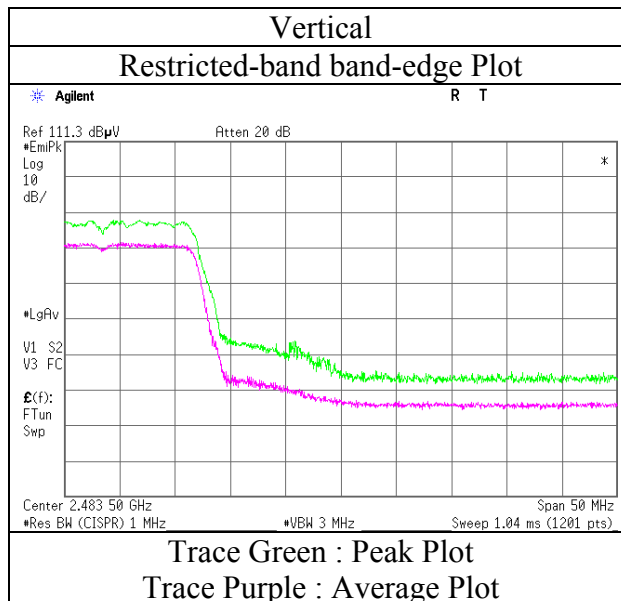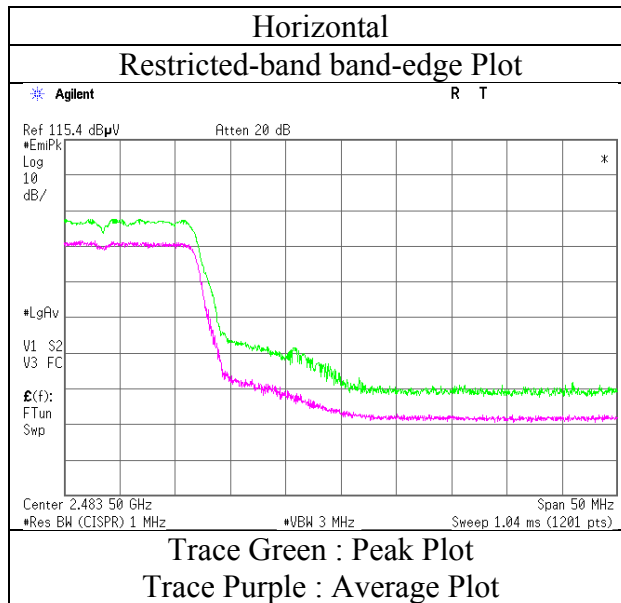

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (Plot data, Worst case)

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber			
Report No.	11201777H			
Date	April 12, 2016	April 20, 2016	April 22, 2016	April 25, 2016
Temperature / Humidity	20 deg. C / 40 % RH	20deg. C / 33 % RH	22deg. C / 51 % RH	25deg. C / 43 % RH
Engineer	Kazuya Yoshioka (1 GHz - 10 GHz)	Tomoki Matsui (10 GHz - 18 GHz)	Kazuya Yoshioka (Below 1 GHz)	Takafumi Noguchi (18 GHz - 26.5 GHz)
Mode	Tx 11g 2462 MHz			

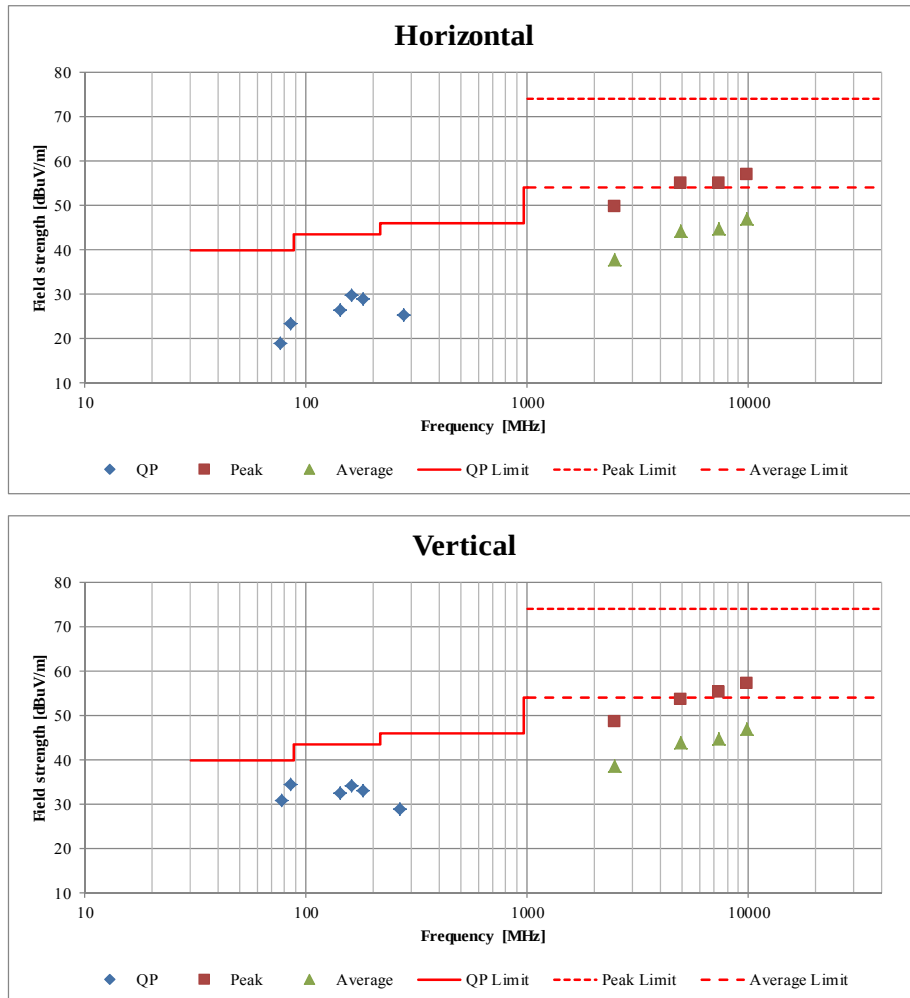

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201777H
Date	April 12, 2016
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Kazuya Yoshioka (1 GHz – 10 GHz)
Mode	Tx 11n-20 2412 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2390.000	PK	48.0	27.9	6.8	32.1	50.6	73.9	23.3	
Hori	2390.000	AV	34.0	27.9	6.8	32.1	36.6	53.9	17.3	
Vert	2390.000	PK	47.0	27.9	6.8	32.1	49.6	73.9	24.3	
Vert	2390.000	AV	35.2	27.9	6.8	32.1	37.8	53.9	16.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.5m / 3.0 m) = 3.53 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	85.0	28.0	6.8	32.1	87.7	-	-	Carrier
Hori	2400.000	PK	42.0	28.0	6.8	32.1	44.7	67.7	23.0	
Vert	2412.000	PK	81.6	28.0	6.8	32.1	84.3	-	-	Carrier
Vert	2400.000	PK	37.0	28.0	6.8	32.1	39.7	64.3	24.6	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201777H
Date	April 12, 2016
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11n-20 2412 MHz

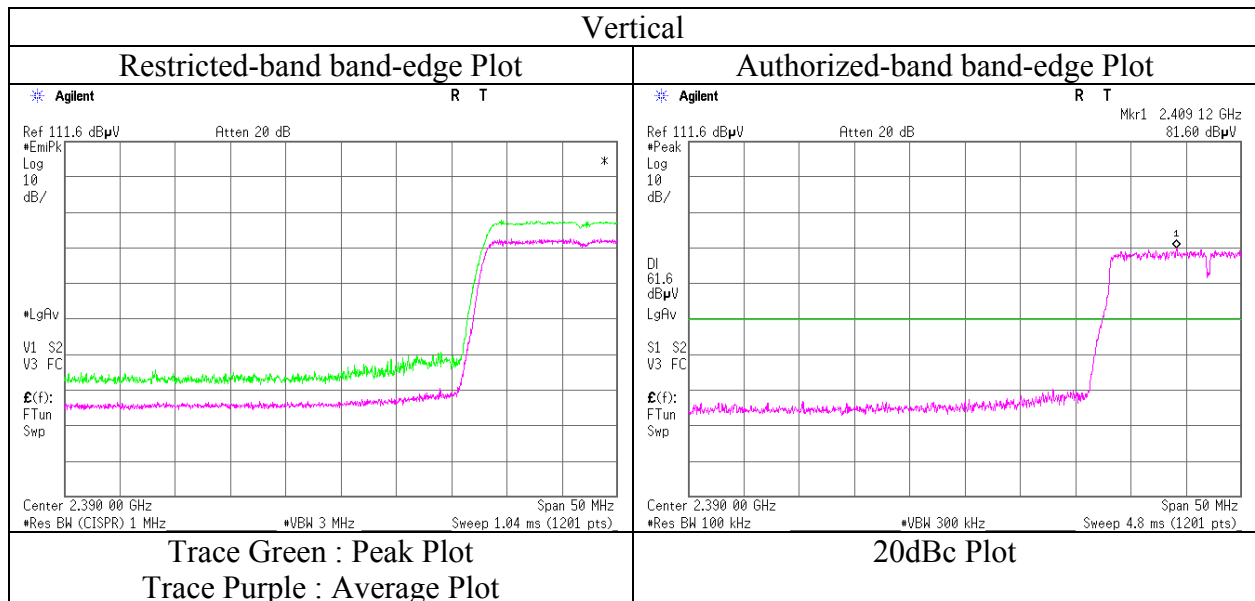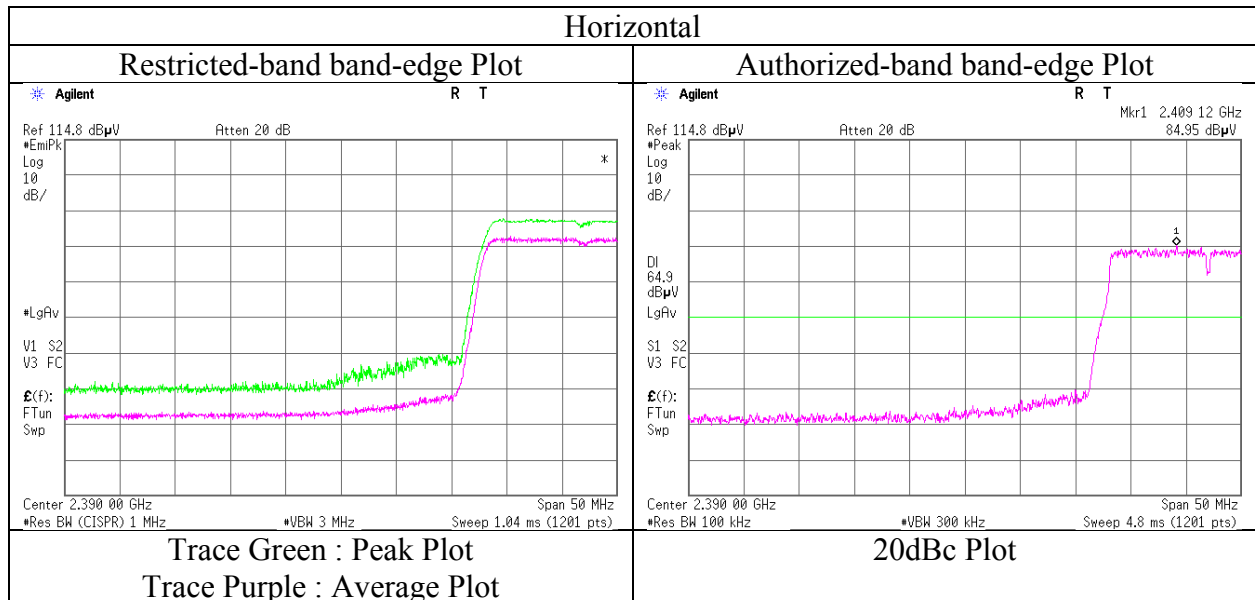

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No. 11201777H
Date April 12, 2016
Temperature / Humidity 20 deg. C / 40 % RH
Engineer Kazuya Yoshioka
 (1 GHz – 10 GHz)
Mode Tx 11n-20 2462 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2483.500	PK	48.5	28.1	6.9	32.1	51.4	73.9	22.5	
Hori	2483.500	AV	32.6	28.1	6.9	32.1	35.5	53.9	18.4	
Vert	2483.500	PK	47.7	28.1	6.9	32.1	50.6	73.9	23.3	
Vert	2483.500	AV	37.4	28.1	6.9	32.1	40.3	53.9	13.6	



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.5m / 3.0 m) = 3.53 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission (Reference Plot for band-edge)


Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201777H
Date	April 12, 2016
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11n-20 2462 MHz

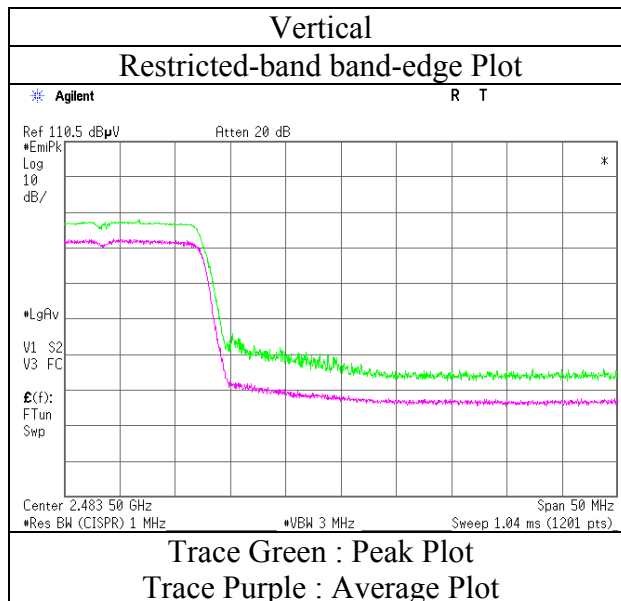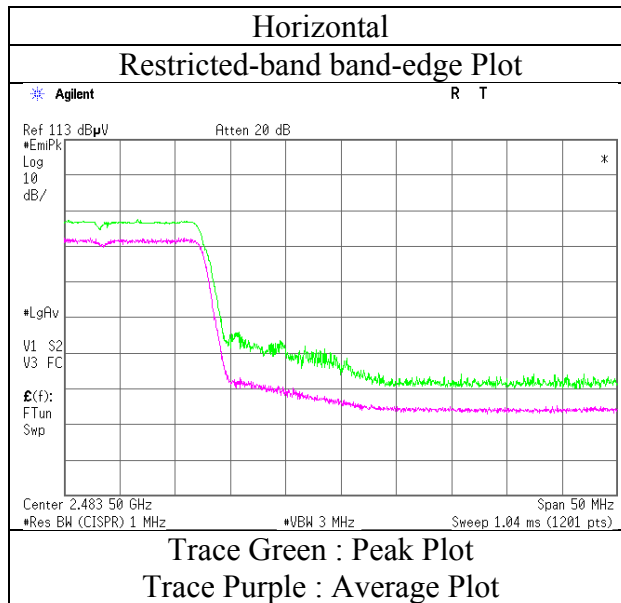

* Final result of restricted band edge was shown in tabular data.

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11201777H
Date	April 14, 2016
Temperature / Humidity	26 deg. C / 51 % RH
Engineer	Masafumi Niwa
Mode	Tx 11g 2462 MHz

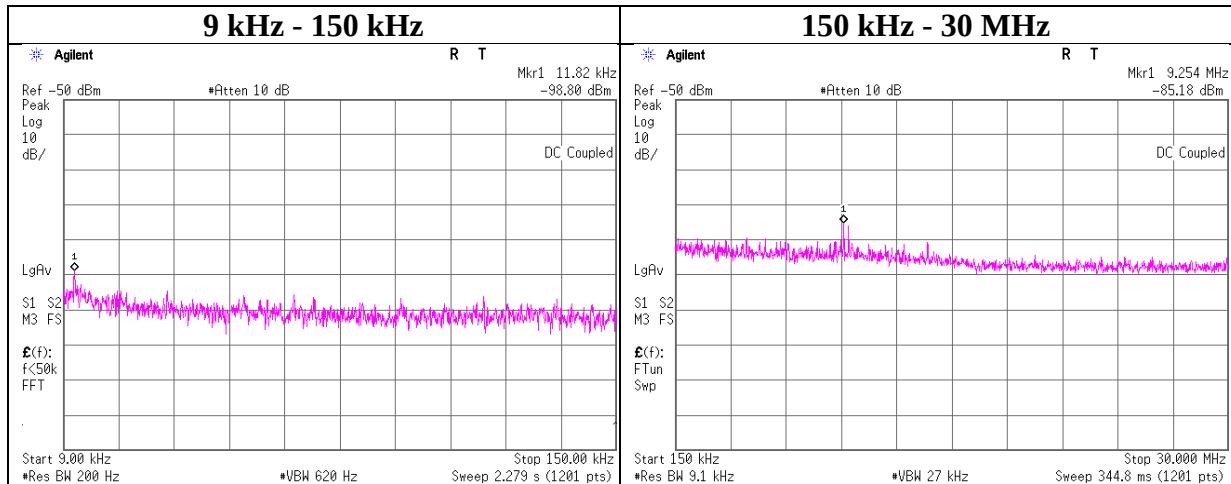

Frequency	Reading	Cable Loss	Attenuator Loss	Antenna Gain	N (Number of Output)	EIRP	Distance	Ground bounce	E (field strength)	Limit	Margin	Remark
[kHz]	[dBm]	[dB]	[dB]	[dBi]		[dBm]	[m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
11.82	-98.8	0.01	9.8	2.1	1	-86.9	300	6.0	-25.6	46.1	71.7	
9254.00	-85.2	0.01	9.9	2.1	1	-73.1	30	6.0	8.1	29.5	21.4	

$E = \text{EIRP} - 20 \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator Loss} + \text{Antenna Gain} + 10 * \log(N)$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Power Density

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11201777H
Date	April 14, 2016
Temperature / Humidity	26 deg. C / 51 % RH
Engineer	Masafumi Niwa
Mode	Tx

11b

Freq.	Reading	Cable Loss	Atten. Loss	Result	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dBm]	[dBm]	[dB]
2412.00	-22.45	0.98	10.03	-11.44	8.00	19.44
2437.00	-22.56	0.99	10.03	-11.54	8.00	19.54
2462.00	-22.81	1.00	10.03	-11.78	8.00	19.78

11g

Freq.	Reading	Cable Loss	Atten. Loss	Result	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dBm]	[dBm]	[dB]
2412.00	-25.41	0.98	10.03	-14.40	8.00	22.40
2437.00	-25.48	0.99	10.03	-14.46	8.00	22.46
2462.00	-25.68	1.00	10.03	-14.65	8.00	22.65


11n-20

Freq.	Reading	Cable Loss	Atten. Loss	Result	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dBm]	[dBm]	[dB]
2412.00	-25.85	0.98	10.03	-14.84	8.00	22.84
2437.00	-27.84	0.99	10.03	-16.82	8.00	24.82
2462.00	-27.10	1.00	10.03	-16.07	8.00	24.07

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

Power Density

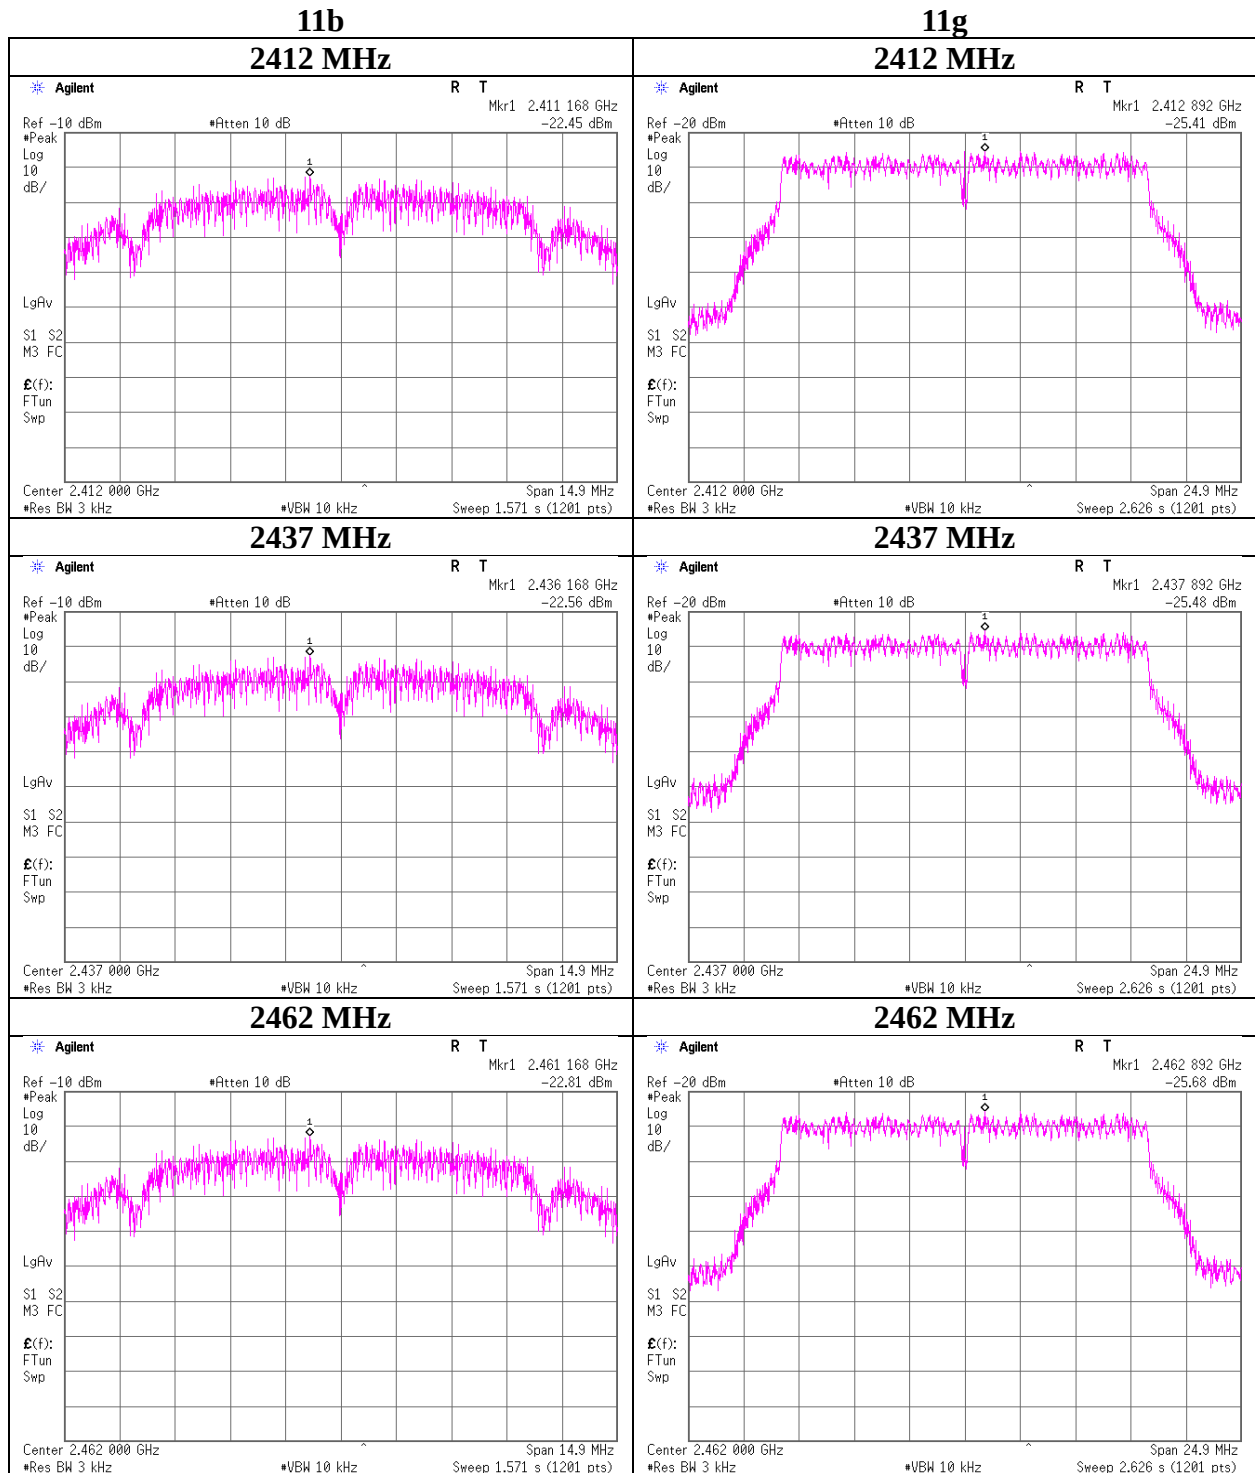

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Power Density


11n-20

2412 MHz

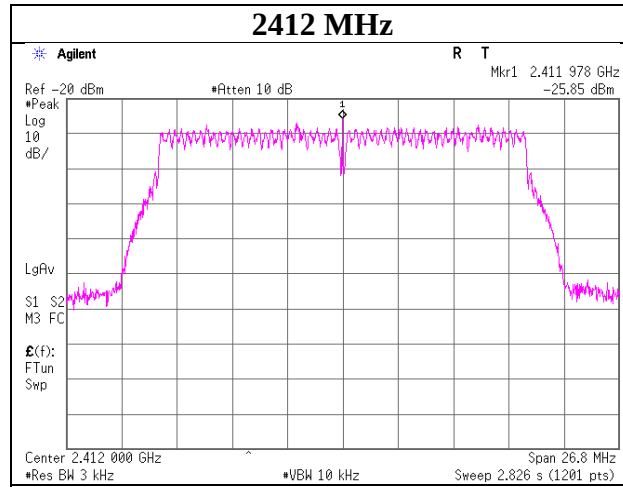


2437 MHz

5

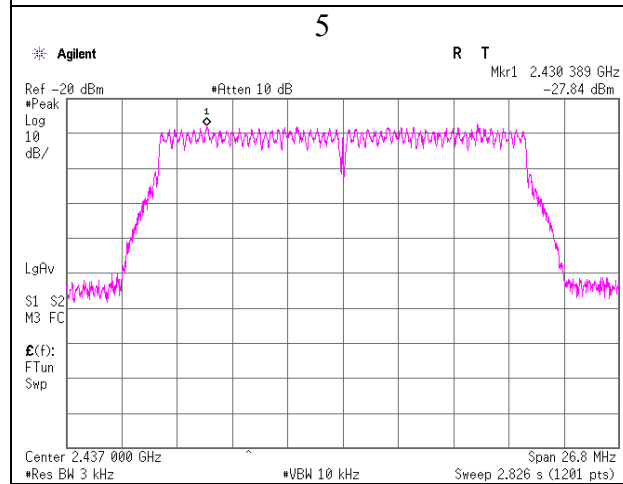

2462 MHz

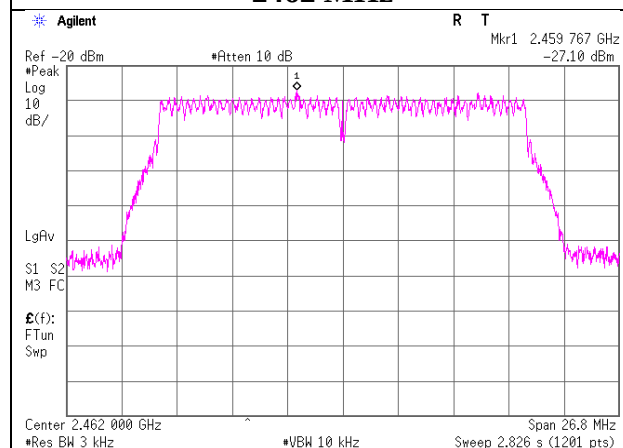

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

99% Occupied Bandwidth

Test place
Report No.

Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.6 Measurement Room
11201777H
April 14, 2016
26 deg. C / 51 % RH
Masafumi Niwa
Tx

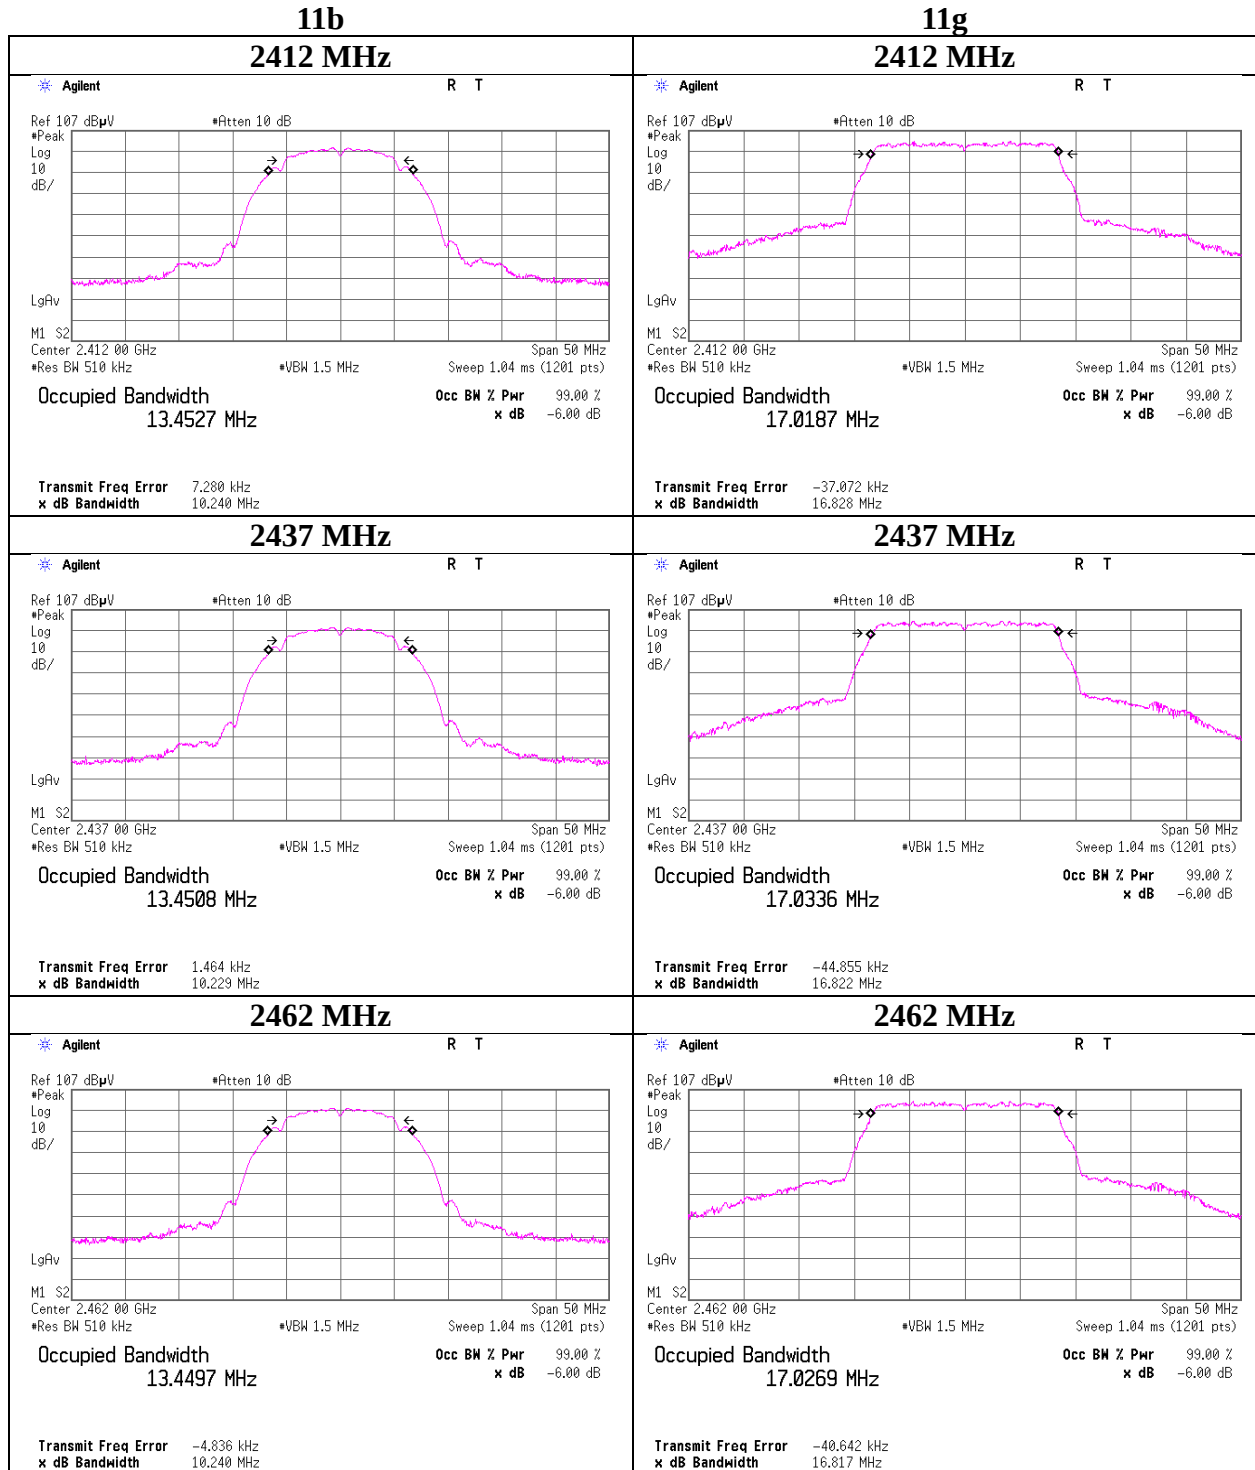

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


99% Occupied Bandwidth

Test place
Report No.
Date
Temperature / Humidity
Engineer
Mode


Ise EMC Lab. No.6 Measurement Room
11201777H
April 14, 2016
26 deg. C / 51 % RH
Masafumi Niwa
Tx

11n-20


2412 MHz

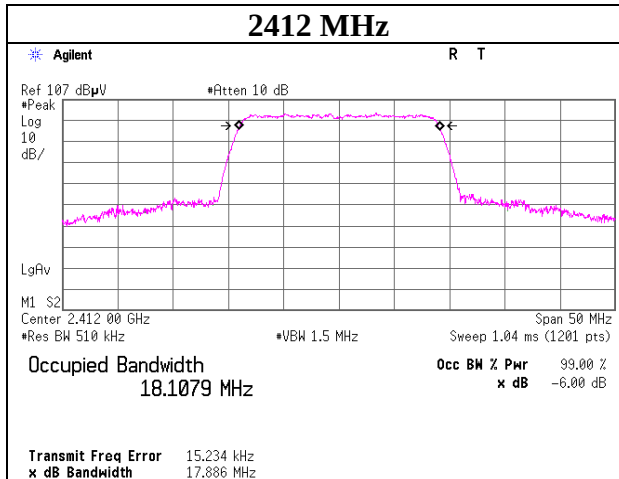

2437 MHz

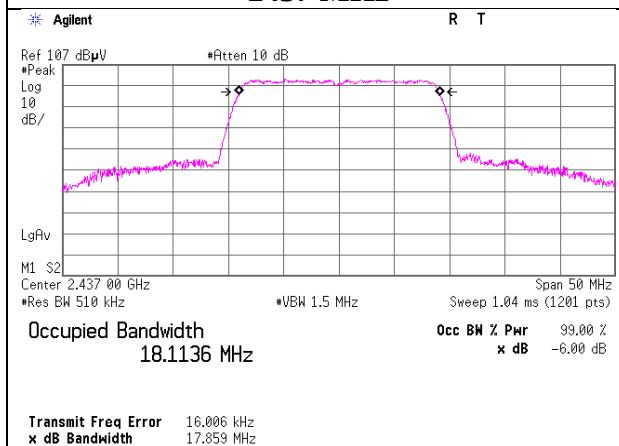

2462 MHz

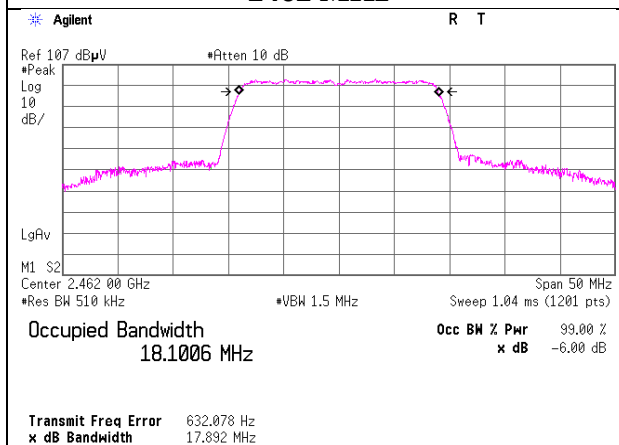

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2015/10/02 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	1501	RE	2016/01/21 * 12
MJM-26	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE,CE	-
MSA-04	Spectrum Analyzer	Agilent	E4448A	US44300523	RE	2015/11/06 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2015/08/10 * 12
MCC-141	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	RE	2015/06/22 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	00650	RE	2015/10/01 * 12
MMM-10	DIGITAL HiTESTER	Hioki	3805	051201148	RE	2016/01/18 * 12
MHF-26	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	002	RE	2015/09/17 * 12
MHF-06	High Pass Filter 3.5-24GHz	TOKIMEC	TF323DCA	601	RE	2015/05/15 * 12
MAEC-01	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	CE	2015/09/19 * 12
MOS-27	Thermo-Hygrometer	CUSTOM	CTH-201	A08Q26	CE	2016/01/21 * 12
MJM-25	Measure	KOMELON	KMC-36	-	CE	-
MTR-09	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	CE	2015/06/08 * 12
MLS-25	LISN(AMN)	Schwarzbeck	NSLK8127	8127-731	CE	2015/07/17 * 12
MCC-03	Coaxial Cable	Fujikura/Suhner/TSJ	5D-2W(20m)/ 3D-2W(7.5m)/ RG400u(1.5m)/ RFM-E421(Switcher)	-/01068 (Switcher)	CE	2015/09/29 * 12
MAT-64	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2016/01/14 * 12
MMM-03	Digital Tester	Fluke	FLUKE 26-3	78030621	CE	2015/08/19 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2015/05/18 * 12
MTR-10	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	RE	2016/01/29 * 12
MBA-05	Biconical Antenna	Schwarzbeck	BBA9106	1302	RE	2015/11/02 * 12
MLA-23	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-192	RE	2016/01/30 * 12
MCC-50	Coaxial Cable	UL Japan	-	-	RE	2015/06/19 * 12
MAT-68	Attenuator	Anritsu	MP721B	6200961025	RE	2015/11/12 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2016/03/18 * 12
MHA-17	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	RE	2015/06/06 * 12
MOS-14	Thermo-Hygrometer	Custom	CTH-201	1401	AT	2016/01/21 * 12
MPM-16	Power Meter	Agilent	8990B	MY51000271	AT	2016/04/07 * 12
MPSE-23	Power sensor	Agilent	N1923A	MY54070004	AT	2016/04/07 * 12
MCC-144	Microwave Cable	Junkosha	MWX221	1207S407	AT	2015/08/06 * 12
MAT-22	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	AT	2016/03/18 * 12
MSA-14	Spectrum Analyzer	Agilent	E4440A	MY48250080	AT	2015/10/07 * 12
MAT-10	Attenuator(10dB)	Weinschel Corp	2	BL1173	AT	2015/11/10 * 12
MCC-163	Microwave Cable	Murata	MXGS83RK3000	-	AT	2015/11/10 * 12

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: CE: Conducted Emission test
 RE: Radiated Emission test
 AT: Antenna Terminal Conducted test